



**Vidyavardhini's College of Engineering and Technology**  
**Department of Artificial Intelligence & Data Science**

<b>Experiment No.6</b>
Implement Singly Linked List ADT
Name: Gautam D. Chaudhari
Roll No: 04
Date of Performance:
Date of Submission:
Marks:
Sign:



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

### Experiment No. 6: Singly Linked List Operations

#### Aim: Implementation of Singly Linked List


#### Objective:

It is used to implement stacks and queues which are like fundamental needs throughout computer science. To prevent the collision between the data in the hash map, we use a singly linked list.

#### Theory:

A linked list is an ordered collection of elements, known as nodes. Each node has two fields: one for data (information) and another to store the address of the next element in the list. The address field of the last node is null, indicating the end of the list. Unlike arrays, linked list elements are not stored in contiguous memory locations; instead, they are connected by explicit links, allowing for dynamic and non-contiguous memory allocation.

The structure of linked list is as shown below

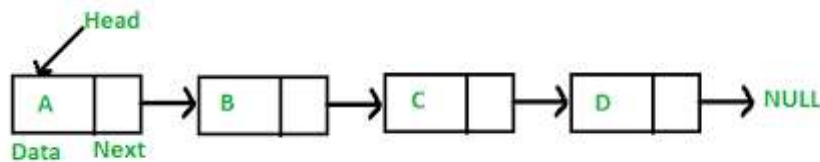

Header is a node containing null in its information field and an next address field contains the address of the first data node in the list. Various operations can be performed on singly linked lists like insertion at front, end, after a given node, before a given node deletion at front, at end and after a given node.

#### Algorithm

Algorithm to insert a new node at the beginning

Step 1: IF AVAIL = NULL

Write OVERFLOW

Go to Step 7 [END OF IF]

Step 2: SET NEW\_NODE = AVAIL

Step 3: SET AVAIL = AVAIL NEXT

Step 4: SET DATA = VAL

Step 5: SET NEW\_NODE -->NEXT = START

Step 6: SET START = NEW\_NODE

Step 7: EXIT



**Vidyavardhini's College of Engineering and Technology**  
**Department of Artificial Intelligence & Data Science**

Algorithm to insert a new node at the end

Step 1: IF AVAIL = NULL

Write OVERFLOW

Go to Step 1 [END OF IF]

Step 2: SET = AVAIL

Step 3: SET AVAIL = AVAIL NEXT

Step 4: SET DATA = VAL

Step 5: SET NEW\_NODE = NULL

Step 6: SET PTR = START

Step 7: Repeat Step 8 while PTR NEXT != NULL

Step 8: SET PTR = PTR NEXT [END OF LOOP]

Step 9: SET PTR--> NEXT = New\_Node

Step 10: EXIT

Algorithm to insert a new node after a node that has value NUM

Step 1: IF AVAIL = NULL

Write OVERFLOW

Go to Step 12 [END OF IF]

Step 2: SET = AVAIL

Step 3: SET AVAIL = AVAIL-->NEXT

Step 4: SET DATA = VAL

Step 5: SET PTR = START

Step 6: SET PREPTR = PTR

Step 7: Repeat Steps 8 and 9 while != NUM

Step 8: SET PREPTR = PTR

Step 9: SET PTR = PTR -->NEXT

[END OF LOOP]

Step 10 : PREPTR--> NEXT = NEW\_NODE

Step 11: SET NEW\_NODE NEXT = PTR



**Vidyavardhini's College of Engineering and Technology**  
**Department of Artificial Intelligence & Data Science**

Step 12: EXIT

Algorithm to insert a new node before a node that has value NUM

Step 1: IF AVAIL = NULL

Write OVERFLOW

Go to Step 12 [END OF IF]

Step 2: SET = AVAIL

Step 3: SET AVAIL = AVAIL-->NEXT

Step 4: SET DATA = VAL

Step 5: SET PTR = START

Step 6: SET PREPTR = PTR

Step 7: Repeat Steps 8 and 9 while PTR DATA != NUM

Step 8: SET PREPTR = PTR

Step 9: SET PTR = PTR -->NEXT

[END OF LOOP]

Step 10: PREPTR-->NEXT = NEW\_NODE

Step 11: SET NEXT = PTR

Step 12: EXIT

Algorithm to delete the first node

Step 1: IF START = NULL

Write UNDERFLOW

Go to Step 5 [END OF IF]

Step 2: SET PTR = START

Step 3: SET START = START -->NEXT

Step 4: FREE PTR

Step 5: EXIT



**Vidyavardhini's College of Engineering and Technology**  
**Department of Artificial Intelligence & Data Science**

Algorithm to delete the last node

Step 1: IF START = NULL

Write UNDERFLOW

Go to Step 8 [END OF IF]

Step 2: SET PTR = START

Step 3: Repeat Steps 4 and 5 while PTR NEXT != NULL

Step 4: SET PREPTR = PTR

Step 5: SET PTR = PTR --> NEXT [END OF LOOP]

Step 6: SET PREPTR-->NEXT = NULL

Step 7: FREE PTR

Step 8: EXIT

Algorithm to delete the node after a given node

Step 1: IF START = NULL

Write UNDERFLOW

Go to Step 1 [END OF IF]

Step 2: SET PTR = START

Step 3: SET PREPTR = PTR

Step 4: Repeat Steps 5 and 6 while PREPTR DATA != NUM

Step 5: SET PREPTR = PTR

Step 6: SET PTR = PTR--> NEXT

[END OF LOOP]

Step 7: SET TEMP = PTR

Step 8: SET PREPTR --> NEXT = PTR--> NEXT

Step 9: FREE TEMP

Step 10: EXIT



**Vidyavardhini's College of Engineering and Technology**  
**Department of Artificial Intelligence & Data Science**

**Code:**

```
#include <stdio.h>
#include <stdlib.h>
#include <conio.h>
#include <malloc.h>

struct node
{
    int data;
    struct node *next;
};

struct node *start = NULL;
struct node *create_ll(struct node *);
struct node *display(struct node *);
struct node *insert_beg(struct node *);
struct node *insert_end(struct node *);
struct node *insert_before(struct node *);
struct node *insert_after(struct node *);
struct node *delete_beg(struct node *);
struct node *delete_end(struct node *);
struct node *delete_node(struct node *);
struct node *delete_after(struct node *);
struct node *delete_list(struct node *);
struct node *sort_list(struct node *);

int main(int argc, char *argv[]) {
    int option;
    do
    {
        printf("\n\n ** IMPLEMENTATION OF SINGLY LINKED LIST **");
        printf("\n 1: Create a list");
        printf("\n 2: Display the list");
        printf("\n 3: Add a node at the beginning");
        printf("\n 4: Add a node at the end");
```



**Vidyavardhini's College of Engineering and Technology**  
**Department of Artificial Intelligence & Data Science**

```
printf("\n 5: Add a node before a given node");
printf("\n 6: Add a node after a given node");
printf("\n 7: Delete a node from the beginning");
printf("\n 8: Delete a node from the end");
printf("\n 9: Delete a given node");
printf("\n 10: Delete a node after a given node");
printf("\n 11: Delete the entire list");
printf("\n 12: Sort the list");
printf("\n 13: EXIT");
printf("\n\n Enter your option : ");
scanf("%d", &option);
switch(option)
{
case 1: start = create_ll(start);
printf("\n LINKED LIST CREATED");
break;
case 2: start = display(start);
break;
case 3: start = insert_beg(start);
break;
case 4: start = insert_end(start);
break;
case 5: start = insert_before(start);
break;
case 6: start = insert_after(start);
break;
case 7: start = delete_beg(start);
break;
case 8: start = delete_end(start);
break;
case 9: start = delete_node(start);
break;
case 10: start = delete_after(start);
```



**Vidyavardhini's College of Engineering and Technology**  
**Department of Artificial Intelligence & Data Science**

```
break;
case 11: start = delete_list(start);
printf("\n LINKED LIST DELETED");
break;
case 12: start = sort_list(start);
break;
}
}while(option !=13);
getch();
return 0;
}

struct node *create_ll(struct node *start)
{
struct node *new_node, *ptr;
int num;
printf("\n Enter -1 to end");
printf("\n Enter the data : ");
scanf("%d", &num);
while(num!=-1)
{
new_node = (struct node*)malloc(sizeof(struct node));
new_node -> data=num;
if(start==NULL)
{
new_node -> next = NULL;
start = new_node;
}
else
{
ptr=start;
while(ptr->next!=NULL)
ptr=ptr->next;
ptr->next = new_node;
```





**Vidyavardhini's College of Engineering and Technology**  
**Department of Artificial Intelligence & Data Science**

```
new_node->next=NULL;
}
printf("\n Enter the data : ");
scanf("%d", &num);
}
return start;
}
struct node *display(struct node *start)
{
struct node *ptr;
ptr = start;
while(ptr != NULL)
{
printf("\t %d", ptr -> data);
ptr = ptr -> next;
}
return start;
}
struct node *insert_beg(struct node *start)
{
struct node *new_node;
int num;
printf("\n Enter the data : ");
scanf("%d", &num);
new_node = (struct node *)malloc(sizeof(struct node));
new_node -> data = num;
new_node -> next = start;
start = new_node;
return start;
}
struct node *insert_end(struct node *start)
{
struct node *ptr, *new_node;
```



**Vidyavardhini's College of Engineering and Technology**  
**Department of Artificial Intelligence & Data Science**

```
int num;
printf("\n Enter the data : ");
scanf("%d", &num);
new_node = (struct node *)malloc(sizeof(struct node));
new_node -> data = num;
new_node -> next = NULL;
ptr = start;
while(ptr -> next != NULL)
ptr = ptr -> next;
ptr -> next = new_node;
return start;
}

struct node *insert_before(struct node *start)
{
struct node *new_node, *ptr, *preptr;
int num, val;
printf("\n Enter the data : ");
scanf("%d", &num);
printf("\n Enter the value before which the data has to be inserted : ");
scanf("%d", &val);
new_node = (struct node *)malloc(sizeof(struct node));
new_node -> data = num;
ptr = start;
while(ptr -> data != val)
{
preptr = ptr;
ptr = ptr -> next;
}
preptr -> next = new_node;
new_node -> next = ptr;
return start;
}

struct node *insert_after(struct node *start)
```



**Vidyavardhini's College of Engineering and Technology**  
**Department of Artificial Intelligence & Data Science**

```
{
struct node *new_node, *ptr, *preptr;
int num, val;
printf("\n Enter the data : ");
scanf("%d", &num);
printf("\n Enter the value after which the data has to be inserted : ");
scanf("%d", &val);
new_node = (struct node *)malloc(sizeof(struct node));
new_node->data = num;
ptr = start;
preptr = ptr;
while(preptr->data != val)
{
    preptr = ptr;
    ptr = ptr->next;
}
preptr->next=new_node;
new_node->next = ptr;
return start;
}

struct node *delete_beg(struct node *start)
{
    struct node *ptr;
    ptr = start;
    start = start->next;
    free(ptr);
    return start;
}

struct node *delete_end(struct node *start)
{
    struct node *ptr, *preptr;
    ptr = start;
    while(ptr->next != NULL)
```



**Vidyavardhini's College of Engineering and Technology**  
**Department of Artificial Intelligence & Data Science**

```
{
    preptr = ptr;
    ptr = ptr -> next;
}
preptr -> next = NULL;
free(ptr);
return start;
}

struct node *delete_node(struct node *start)
{
    struct node *ptr, *preptr;
    int val;
    printf("\n Enter the value of the node which has to be deleted : ");
    scanf("%d", &val);
    ptr = start;
    if(ptr -> data == val)
    {
        start = delete_beg(start);
        return start;
    }
    else
    {
        while(ptr -> data != val)
        {
            preptr = ptr;
            ptr = ptr -> next;
        }
        preptr -> next = ptr -> next;
        free(ptr);
        return start;
    }
}

struct node *delete_after(struct node *start)
{

```



**Vidyavardhini's College of Engineering and Technology**  
**Department of Artificial Intelligence & Data Science**

```
struct node *ptr, *preptr;
int val;
printf("\n Enter the value after which the node has to deleted : ");
scanf("%d", &val);
ptr = start;
preptr = ptr;
while(preptr -> data != val)
{
    preptr = ptr;
    ptr = ptr -> next;
}
preptr -> next = ptr -> next;
free(ptr);
return start;
}

struct node *delete_list(struct node *start)
{
    struct node *ptr; // Lines 252-254 were modified from original code to fix
    unresponsiveness in output window
    if(start != NULL){
        ptr = start;
        while(ptr != NULL)
        {
            printf("\n %d is to be deleted next", ptr -> data);
            start = delete_beg(ptr);
            ptr = start;
        }
    }
    return start;
}

struct node *sort_list(struct node *start)
{
    struct node *ptr1, *ptr2;
```



**Vidyavardhini's College of Engineering and Technology**  
**Department of Artificial Intelligence & Data Science**

```
int temp;
ptr1 = start;
while(ptr1 -> next != NULL)
{
    ptr2 = ptr1 -> next;
    while(ptr2 != NULL)
    {
        if(ptr1 -> data > ptr2 -> data)
        {
            temp = ptr1 -> data;
            ptr1 -> data = ptr2 -> data;
            ptr2 -> data = temp;
        }
        ptr2 = ptr2 -> next;
    }
    ptr1 = ptr1 -> next;
}
return start;
}
```



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

Output:

```
9: Delete a given node
10: Delete a node after a given node
11: Delete the entire list
12: Sort the list
13: EXIT
```

```
Enter your option : 2
                20    30    40    50    60
```

```
** IMPEMENRTATION OF SINGLY LINDED LIST **
```

```
1: Create a list
2: Display the list
3: Add a node at the beginning
4: Add a node at the end
5: Add a node before a given node
6: Add a node after a given node
7: Delete a node from the beginning
8: Delete a node from the end
9: Delete a given node
10: Delete a node after a given node
11: Delete the entire list
12: Sort the list
13: EXIT
```

```
Enter your option :
```

```
11: Delete the entire list
12: Sort the list
13: EXIT
```

```
Enter your option : 9
```

```
Enter the value of the node which has to be deleted : 50
```

```
** IMPEMENRTATION OF SINGLY LINDED LIST **
```

```
1: Create a list
2: Display the list
3: Add a node at the beginning
4: Add a node at the end
5: Add a node before a given node
6: Add a node after a given node
7: Delete a node from the beginning
8: Delete a node from the end
9: Delete a given node
10: Delete a node after a given node
11: Delete the entire list
12: Sort the list
13: EXIT
```

```
Enter your option : _
```



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

### Conclusion:

Write an example of stack and queue implementation using singly linked list?

Stack Implementation:

```
#include <stdio.h>
#include <stdlib.h>
struct Node {
    int data;
    struct Node* next;
};
struct Stack {
    struct Node* top;
};

struct Node* newNode(int data) {
    struct Node* node = (struct Node*)malloc(sizeof(struct Node));
    node->data = data;
    node->next = NULL;
    return node;
}

struct Stack* createStack() {
    struct Stack* stack = (struct Stack*)malloc(sizeof(struct Stack));
    stack->top = NULL;
    return stack;
}

void push(struct Stack* stack, int data) {
    struct Node* node = newNode(data);
    node->next = stack->top;
    stack->top = node;
}

int pop(struct Stack* stack) {
    if (stack->top == NULL) {
        printf("Stack is empty\n");
        return -1; // Error
    }
    struct Node* temp = stack->top;
    int data = temp->data;
    stack->top = temp->next;
```





## Vidyavardhini's College of Engineering and Technology

### Department of Artificial Intelligence & Data Science

```
    free(temp);
    return data;
}

int main() {
    struct Stack* stack = createStack();

    push(stack, 1);
    push(stack, 2);
    push(stack, 3);

    printf("Popped: %d\n", pop(stack));
    printf("Popped: %d\n", pop(stack));

    push(stack, 4);
    printf("Popped: %d\n", pop(stack));

    return 0;
}
```

Queue Implementation:

```
#include <stdio.h>
#include <stdlib.h>

struct Node {
    int data;
    struct Node* next;
};

struct Queue {
    struct Node* front;
    struct Node* rear;
};

struct Node* newNode(int data) {
    struct Node* node = (struct Node*)malloc(sizeof(struct Node));
    node->data = data;
    node->next = NULL;
    return node;
}

struct Queue* createQueue() {
    struct Queue* queue = (struct Queue*)malloc(sizeof(struct Queue));
```



**Vidyavardhini's College of Engineering and Technology**  
**Department of Artificial Intelligence & Data Science**

```
queue->front = queue->rear = NULL;
return queue;
}

void enqueue(struct Queue* queue, int data) {
    struct Node* node = newNode(data);
    if (queue->rear == NULL) {
        queue->front = queue->rear = node;
        return;
    }
    queue->rear->next = node;
    queue->rear = node;
}

int dequeue(struct Queue* queue) {
    if (queue->front == NULL) {
        printf("Queue is empty\n");
        return -1; // Error
    }
    struct Node* temp = queue->front;
    int data = temp->data;
    queue->front = temp->next;
    if (queue->front == NULL) {
        queue->rear = NULL;
    }
    free(temp);
    return data;
}

int main() {
    struct Queue* queue = createQueue();

    enqueue(queue, 1);
    enqueue(queue, 2);
    enqueue(queue, 3);

    printf("Dequeued: %d\n", dequeue(queue));
    printf("Dequeued: %d\n", dequeue(queue));

    enqueue(queue, 4);
    printf("Dequeued: %d\n", dequeue(queue));
    return 0;
}
```