

[width=1.5cm]imt

[width=1.5cm]minesste

footline[frame number] text margin left=20pt,text margin right=20pt struc-
turefg=minesste

INFORMED SEARCH ALGORITHMS

CHAPTER 4, SECTIONS 1–2

Outline

- ◇ Best-first search
- ◇ A* search
- ◇ Heuristics

Review: Tree search

```
function TREE-SEARCH(problem,  
fringe) returns a solution, or failure  
    fringe ← INSERT(MAKE-NODE(INITIAL-STATE[problem]),  
    fringe)  
    loop do  
        if fringe is empty then return  
failure  
    node ← REMOVE-FRONT(fringe)  
    if GOAL-TEST[problem]  
    applied to STATE(node) succeeds re-  
turn node  
    fringe ← INSERTALL(EXPAND(node,  
    problem), fringe)
```

A strategy is defined by picking the **order
of node expansion**

Best-first search

Idea: use an evaluation function for each node

– estimate of “desirability”

⇒ Expand most desirable unexpanded node

Implementation:


fringe is a queue sorted in decreasing order of desirability

Special cases:

greedy search

A* search

Romania with step costs in km

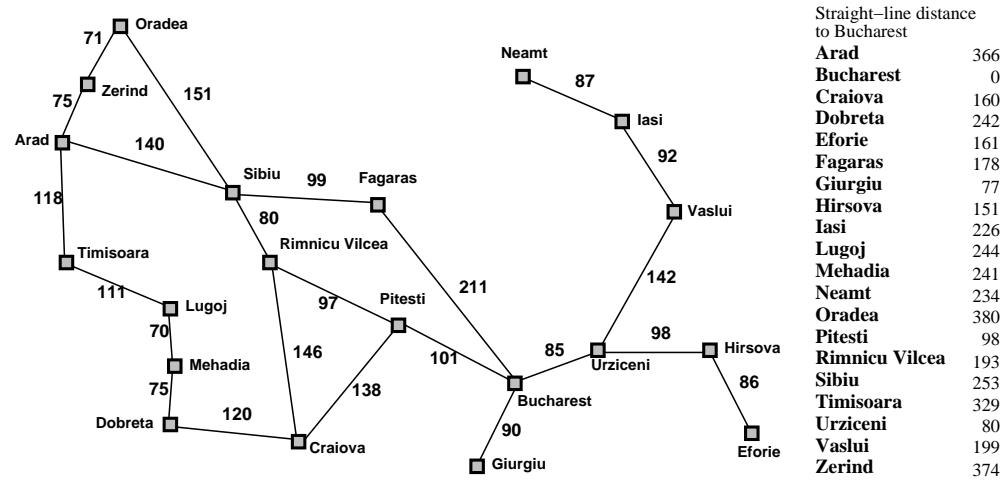

Greedy search

Evaluation function $h(n)$ (**h**euristic)
= estimate of cost from n to the
closest goal


E.g., $h_{\text{SLD}}(n)$ = straight-line distance from
 n to Bucharest

Greedy search expands the node that **ap-
pears** to be closest to goal


Greedy search example

▶ Arad
366


Greedy search example

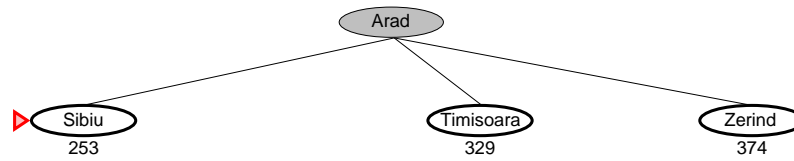

Greedy search example

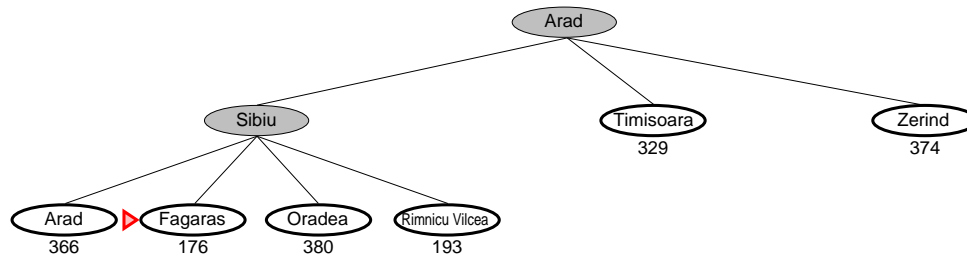

Greedy search example

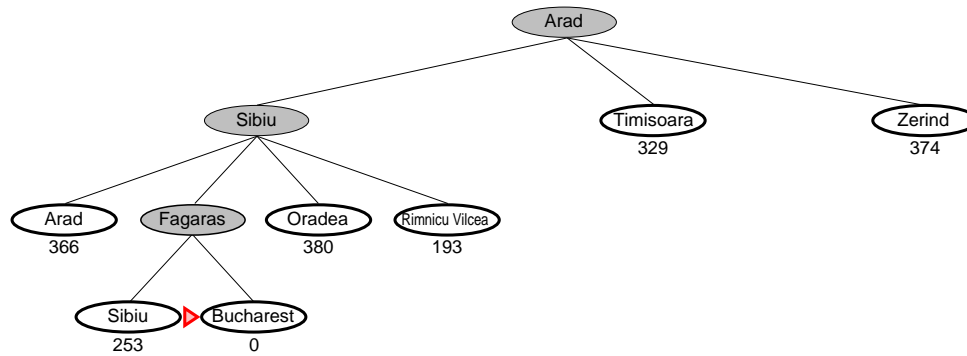

Properties of greedy search

Complete??

Properties of greedy search

Complete?? No—can get stuck in loops,
e.g., with Oradea as goal,

lasi \rightarrow Neamt \rightarrow lasi \rightarrow Neamt \rightarrow

Complete in finite space with repeated-state
checking

Time??

Properties of greedy search

Complete?? No—can get stuck in loops,
e.g.,

lasi \rightarrow Neamt \rightarrow lasi \rightarrow Neamt \rightarrow

Complete in finite space with repeated-state
checking

Time?? $O(b^m)$, but a good heuristic can
give dramatic improvement

Space??

Properties of greedy search

Complete?? No—can get stuck in loops,
e.g.,

lasi \rightarrow Neamt \rightarrow lasi \rightarrow Neamt \rightarrow

Complete in finite space with repeated-state
checking

Time?? $O(b^m)$, but a good heuristic can
give dramatic improvement

Space?? $O(b^m)$ —keeps all nodes in mem-
ory

Optimal??

Properties of greedy search

Complete?? No—can get stuck in loops,
e.g.,

lasi \rightarrow Neamt \rightarrow lasi \rightarrow Neamt \rightarrow

Complete in finite space with repeated-state
checking

Time?? $O(b^m)$, but a good heuristic can
give dramatic improvement

Space?? $O(b^m)$ —keeps all nodes in mem-
ory

Optimal?? No

A* search

Idea: avoid expanding paths that are already expensive

Evaluation function $f(n) = g(n) + h(n)$

$g(n)$ = cost so far to reach n

$h(n)$ = estimated cost to goal from n

$f(n)$ = estimated total cost of path through n to goal

A* search uses an **admissible** heuristic

i.e., $h(n) \leq h^*(n)$ where $h^*(n)$ is the **true** cost from n .

(Also require $h(n) \geq 0$, so $h(G) = 0$ for any goal G .)


E.g., $h_{\text{SLD}}(n)$ never overestimates the actual road distance

Theorem: A* search is optimal


A* search example

▶ Arad
366=0+366


A* search example




A* search example

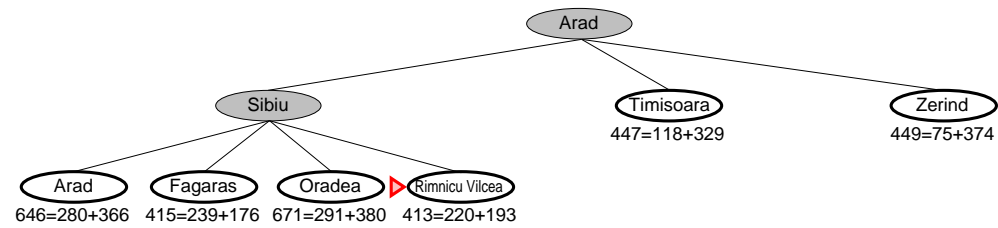


A* search example

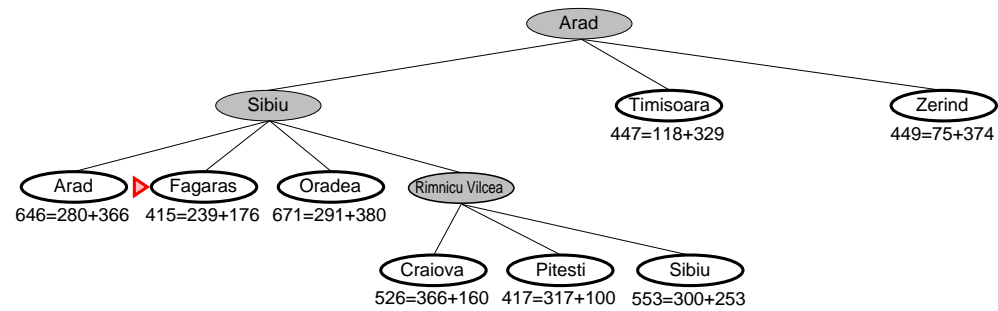

A* search example

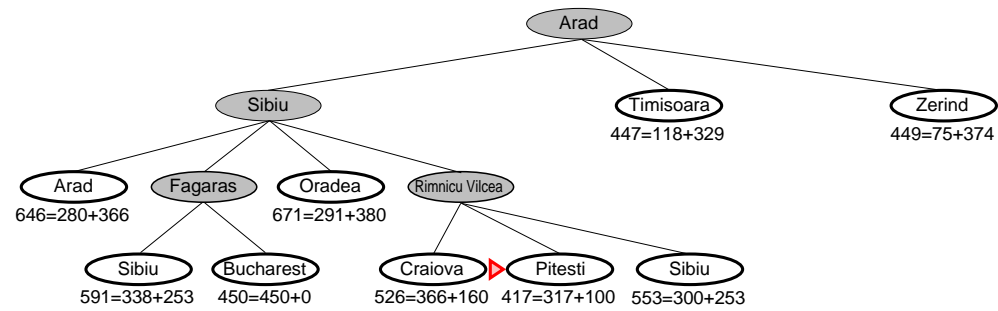


A* search example

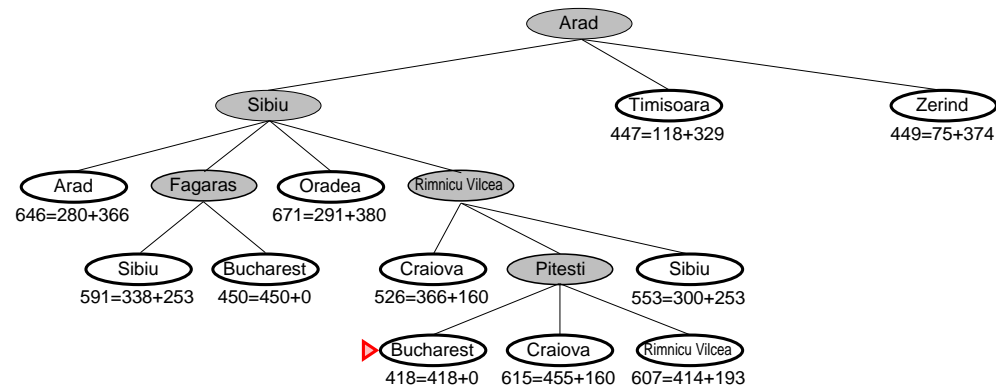

Optimality of A^* (standard proof)

Suppose some suboptimal goal G_2 has been generated and is in the queue. Let n be an unexpanded node on a shortest path to an optimal goal G_1 .

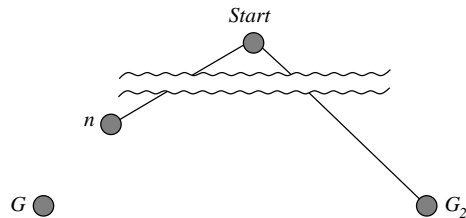

$$\begin{aligned} f(G_2) &= g(G_2) && \text{since } h(G_2) = 0 \\ &> g(G_1) && \text{since } G_2 \text{ is suboptimal} \\ &\geq f(n) && \text{since } h \text{ is admissible} \end{aligned}$$


Since $f(G_2) > f(n)$, A^* will never select G_2 for expansion

Optimality of A^* (more useful)

Lemma: A^* expands nodes in order of increasing f value*

Gradually adds “ f -contours” of nodes (cf. breadth-first adds layers)

Contour i has all nodes with $f = f_i$, where $f_i < f_{i+1}$

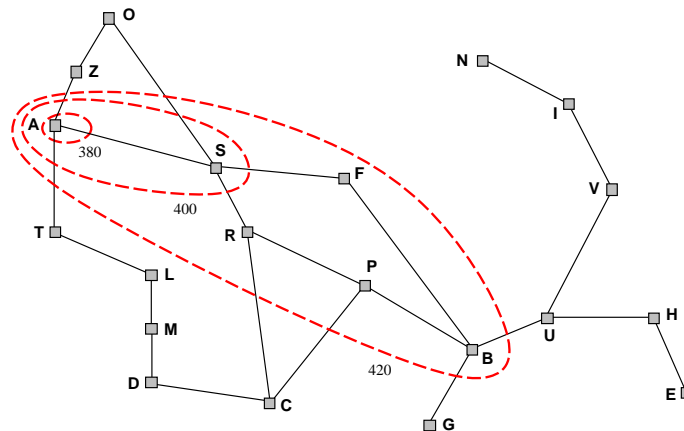

Properties of A^*

Complete??

Properties of A^*

Complete?? Yes, unless there are infinitely many nodes with $f \leq f(G)$

Time??

Properties of A^*

Complete?? Yes, unless there are infinitely many nodes with $f \leq f(G)$

Time?? Exponential in [relative error in h \times length of soln.]

Space??

Properties of A^*

Complete?? Yes, unless there are infinitely many nodes with $f \leq f(G)$

Time?? Exponential in [relative error in h \times length of soln.]

Space?? Keeps all nodes in memory

Optimal??

Properties of A^*

Complete?? Yes, unless there are infinitely many nodes with $f \leq f(G)$

Time?? Exponential in [relative error in h \times length of soln.]

Space?? Keeps all nodes in memory

Optimal?? Yes—cannot expand f_{i+1} until f_i is finished

A^* expands all nodes with $f(n) < C^*$

A^* expands some nodes with $f(n) = C^*$

A^* expands no nodes with $f(n) > C^*$


Proof of lemma: Consistency

A heuristic is **consistent** if

$$h(n) \leq c(n, a, n') + h(n')$$

If h is consistent, we have

$$\begin{aligned} f(n') &= g(n') + h(n') \\ &= g(n) + c(n, a, n') + h(n') \\ &\geq g(n) + h(n) \\ &= f(n) \end{aligned}$$



I.e., $f(n)$ is nondecreasing along any path.

Admissible heuristics

E.g., for the 8-puzzle:

$h_1(n)$ = number of misplaced tiles

$h_2(n)$ = total **Manhattan** distance
(i.e., no. of squares from desired
location of each tile)

7	2	4
5		6
8	3	1

Start State

1	2	3
4	5	6
7	8	

Goal State

$$h_1(S) = ??$$

$$h_2(S) = ??$$

Admissible heuristics

E.g., for the 8-puzzle:

$h_1(n)$ = number of misplaced tiles

$h_2(n)$ = total **Manhattan** distance
(i.e., no. of squares from desired location of each tile)

7	2	4
5		6
8	3	1

Start State

1	2	3
4	5	6
7	8	

Goal State

$$h_1(S) = ?? \quad 6$$

$$h_2(S) = ?? \quad 4+0+3+3+1+0+2+1 = 14$$

Dominance

If $h_2(n) \geq h_1(n)$ for all n (both admissible)
then h_2 dominates h_1 and is better for search

Typical search costs:

$d = 14$ IDS = 3,473,941 nodes

$A^*(h_1) = 539$ nodes

$A^*(h_2) = 113$ nodes

$d = 24$ IDS \approx 54,000,000,000 nodes

$A^*(h_1) = 39,135$ nodes

$A^*(h_2) = 1,641$ nodes

Given any admissible heuristics h_a, h_b ,

$$h(n) = \max(h_a(n), h_b(n))$$

is also admissible and dominates h_a, h_b

Relaxed problems

Admissible heuristics can be derived from the **exact** solution cost of a **relaxed** version of the problem

If the rules of the 8-puzzle are relaxed so that a tile can move **anywhere**, then $h_1(n)$ gives the shortest solution


If the rules are relaxed so that a tile can move to **any adjacent square**, then $h_2(n)$ gives the shortest solution

Key point: the optimal solution cost of a relaxed problem is no greater than the optimal solution cost of the real problem

Relaxed problems contd.

Well-known example: travelling salesperson problem (TSP)

Find the shortest tour visiting all cities exactly once

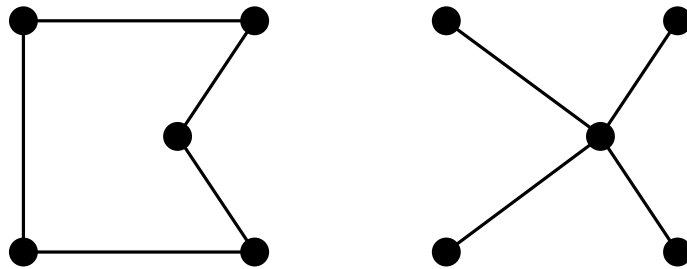

Minimum spanning tree can be computed in $O(n^2)$ and is a lower bound on the shortest (open) tour

Summary

Heuristic functions estimate costs of shortest paths

Good heuristics can dramatically reduce search cost

Greedy best-first search expands lowest h
– incomplete and not always optimal

A* search expands lowest $g + h$
– complete and optimal
– also optimally efficient (up to tie-breaks, for forward search)

Admissible heuristics can be derived from exact solution of relaxed problems