

7 the Adapter and Facade Patterns


Being Adaptive



In this chapter we're going to attempt such impossible feats as **putting a square peg in a round hole**. Sound impossible? Not when we have Design Patterns. Remember the Decorator Pattern? We **wrapped objects** to give them new responsibilities. Now we're going to wrap some objects with a different purpose: to make their interfaces look like something they're not. Why would we do that? So we can adapt a design expecting one interface to a class that implements a different interface. That's not all; while we're at it, we're going to look at another pattern that wraps objects to simplify their interface.

Adapters all around us

You'll have no trouble understanding what an OO adapter is because the real world is full of them. How's this for an example: Have you ever needed to use a US-made laptop in a European country? Then you've probably needed an AC power adapter...

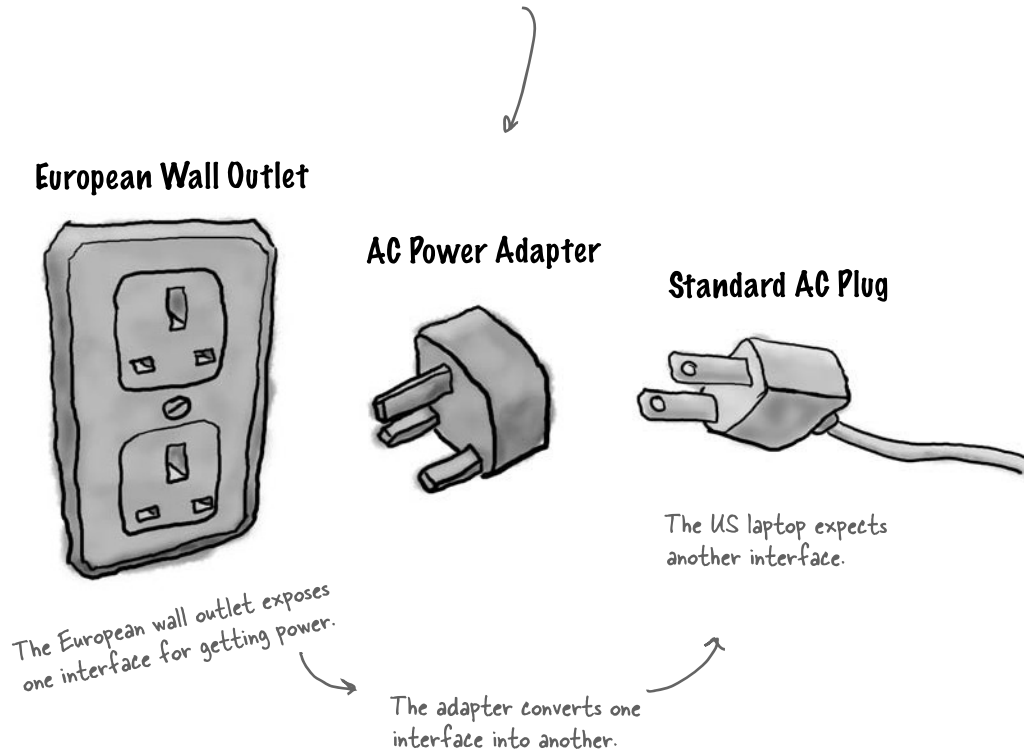

You know what the adapter does: it sits in between the plug of your laptop and the European AC outlet; its job is to adapt the European outlet so that you can plug your laptop into it and receive power. Or look at it this way: the adapter changes the interface of the outlet into one that your laptop expects.


Some AC adapters are simple – they only change the shape of the outlet so that it matches your plug, and they pass the AC current straight through – but other adapters are more complex internally and may need to step the power up or down to match your devices' needs.

Okay, that's the real world, what about object oriented adapters? Well, our OO adapters play the same role as their real world counterparts: they take an interface and adapt it to one that a client is expecting.


How many other real world adapters can you think of?

Object oriented adapters


Say you've got an existing software system that you need to work a new vendor class library into, but the new vendor designed their interfaces differently than the last vendor:

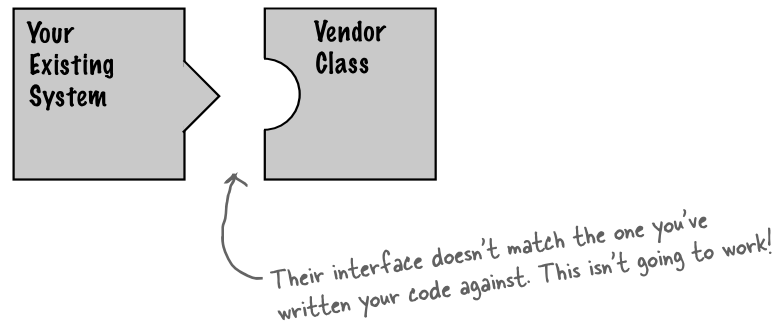

Okay, you don't want to solve the problem by changing your existing code (and you can't change the vendor's code). So what do you do? Well, you can write a class that adapts the new vendor interface into the one you're expecting.

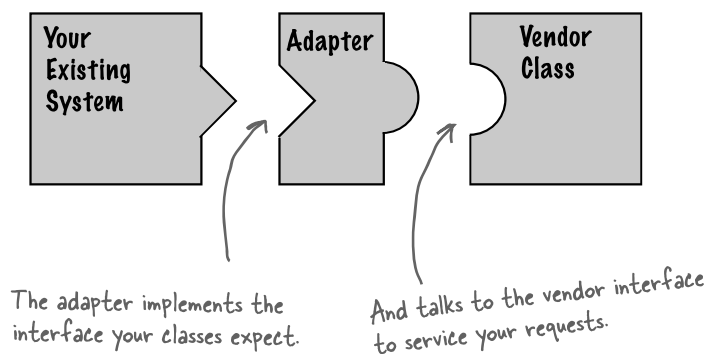

The adapter acts as the middleman by receiving requests from the client and converting them into requests that make sense on the vendor classes.

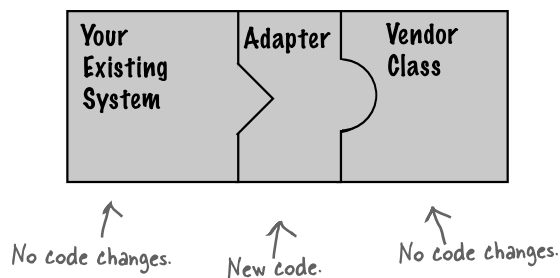

Can you think of a solution that doesn't require YOU to write ANY additional code to integrate the new vendor classes? How about making the vendor supply the adapter class.

If it walks like a duck and quacks like a duck,
then it ~~must~~ might be a duck turkey wrapped
with a duck adapter...



It's time to see an adapter in action. Remember our ducks from Chapter 1? Let's review a slightly simplified version of the Duck interfaces and classes:

```
public interface Duck {  
    public void quack();  
    public void fly();  
}
```

This time around, our ducks implement a Duck interface that allows Ducks to quack and fly.

Here's a subclass of Duck, the MallardDuck.

```
public class MallardDuck implements Duck {  
    public void quack() {  
        System.out.println("Quack");  
    }  
  
    public void fly() {  
        System.out.println("I'm flying");  
    }  
}
```

Simple implementations: the duck just prints out what it is doing.

Now it's time to meet the newest fowl on the block:

```
public interface Turkey {  
    public void gobble();  
    public void fly();  
}
```

Turkeys don't quack, they gobble.

Turkeys can fly, although they can only fly short distances.

```

public class WildTurkey implements Turkey {
    public void gobble() {
        System.out.println("Gobble gobble");
    }

    public void fly() {
        System.out.println("I'm flying a short distance");
    }
}

```

Here's a concrete implementation of Turkey; like Duck, it just prints out its actions.

Now, let's say you're short on Duck objects and you'd like to use some Turkey objects in their place. Obviously we can't use the turkeys outright because they have a different interface.

So, let's write an Adapter:



Code Up Close

```

public class TurkeyAdapter implements Duck {
    Turkey turkey;

    public TurkeyAdapter(Turkey turkey) {
        this.turkey = turkey;
    }

    public void quack() {
        turkey.gobble();
    }

    public void fly() {
        for(int i=0; i < 5; i++) {
            turkey.fly();
        }
    }
}

```

First, you need to implement the interface of the type you're adapting to. This is the interface your client expects to see.

Next, we need to get a reference to the object that we are adapting; here we do that through the constructor.

Now we need to implement all the methods in the interface; the quack() translation between classes is easy: just call the gobble() method.

Even though both interfaces have a fly() method, Turkeys fly in short spurts – they can't do long-distance flying like ducks. To map between a Duck's fly() method and a Turkey's, we need to call the Turkey's fly() method five times to make up for it.

Test drive the adapter

Now we just need some code to test drive our adapter:

```
public class DuckTestDrive {
    public static void main(String[] args) {
        MallardDuck duck = new MallardDuck();

        WildTurkey turkey = new WildTurkey();
        Duck turkeyAdapter = new TurkeyAdapter(turkey);

        System.out.println("The Turkey says...");
        turkey.gobble();
        turkey.fly();

        System.out.println("\nThe Duck says...");
        testDuck(duck);

        System.out.println("\nThe TurkeyAdapter says...");
        testDuck(turkeyAdapter);
    }

    static void testDuck(Duck duck) {
        duck.quack();
        duck.fly();
    }
}
```

Let's create a Duck...
and a Turkey.

And then wrap the turkey in a TurkeyAdapter, which makes it look like a Duck.

Then, let's test the Turkey: make it gobble, make it fly.

Now let's test the duck by calling the testDuck() method, which expects a Duck object.

Now the big test: we try to pass off the turkey as a duck...

Here's our testDuck() method; it gets a duck and calls its quack() and fly() methods.

Test run

```
File Edit Window Help Don'tForgetToDuck
%java RemoteControlTest
The Turkey says...
Gobble gobble
I'm flying a short distance

The Duck says...
Quack
I'm flying

The TurkeyAdapter says...
Gobble gobble
I'm flying a short distance
I'm flying a short distance
I'm flying a short distance
I'm flying a short distance
I'm flying a short distance
```


The Turkey gobbles and flies a short distance.

The Duck quacks and flies just like you'd expect.

And the adapter gobbles when quack() is called and flies a few times when fly() is called. The testDuck() method never knows it has a turkey disguised as a duck!

The Adapter Pattern explained

Now that we have an idea of what an Adapter is, let's step back and look at all the pieces again.

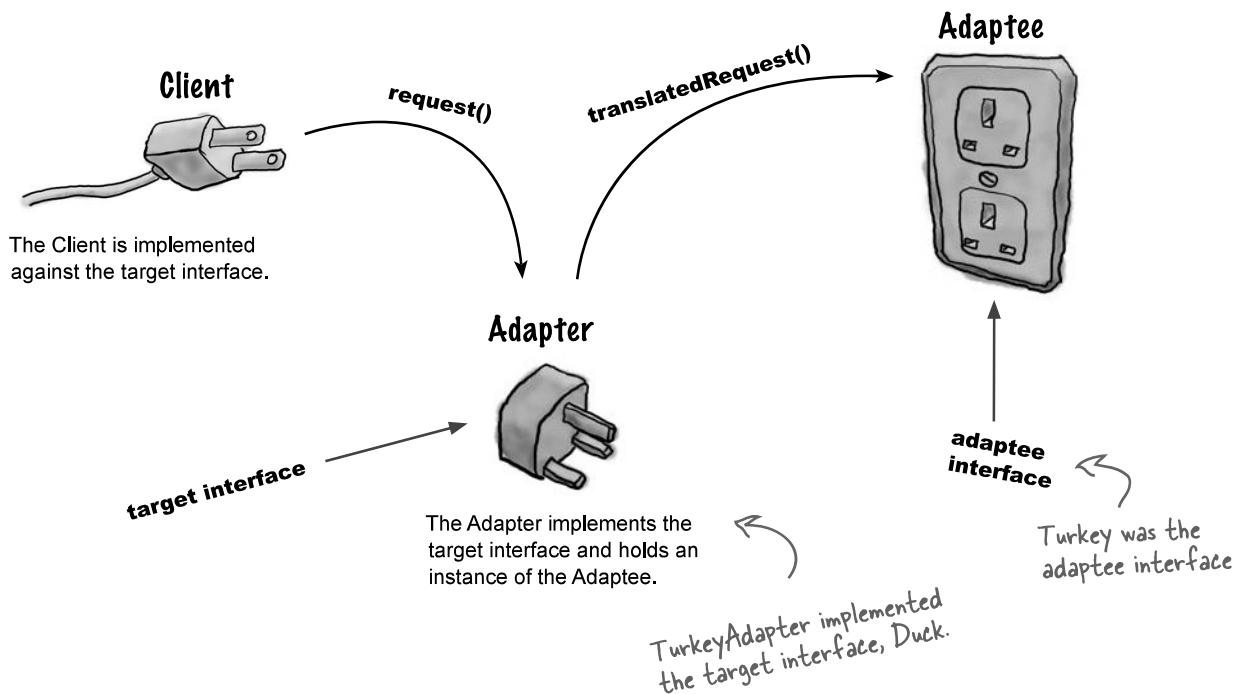

Here's how the Client uses the Adapter

- ❶ **The client makes a request to the adapter by calling a method on it using the target interface.**
- ❷ **The adapter translates the request into one or more calls on the adaptee using the adaptee interface.**
- ❸ **The client receives the results of the call and never knows there is an adapter doing the translation.**

Note that the Client and Adaptee are decoupled – neither knows about the other.