



Study 5A: family-conditioned binary detection and learned-reference availability


A Aggregate metrics can conceal supported family-slice failures

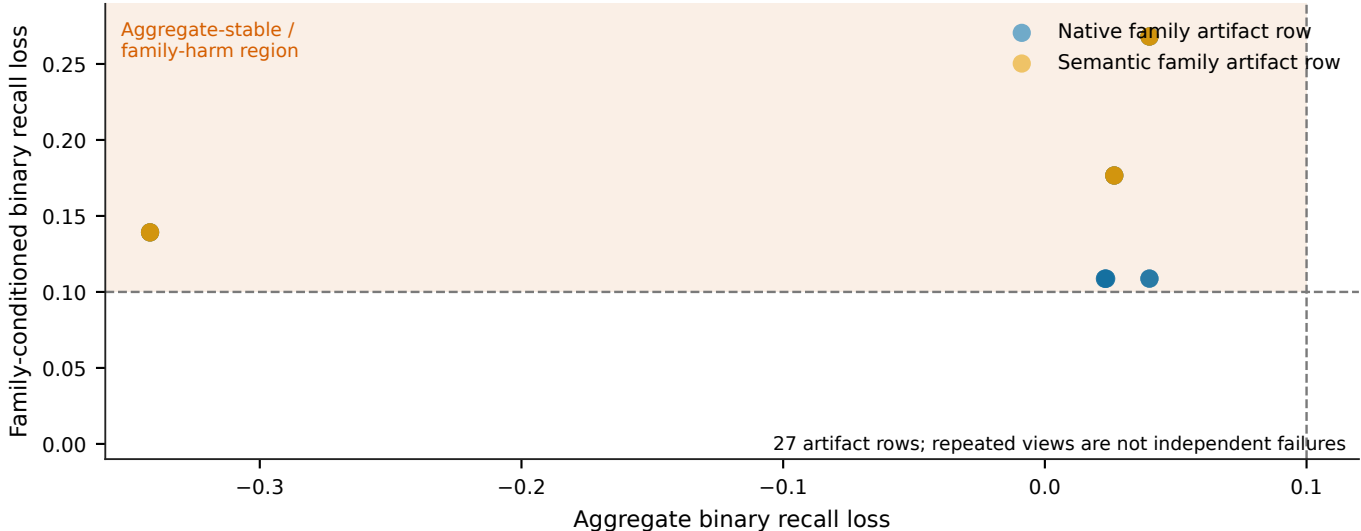

B1 Native representation

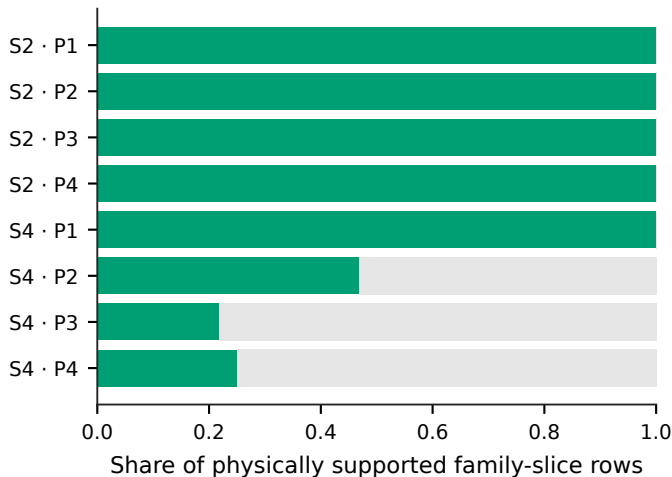

B2 Semantic representation

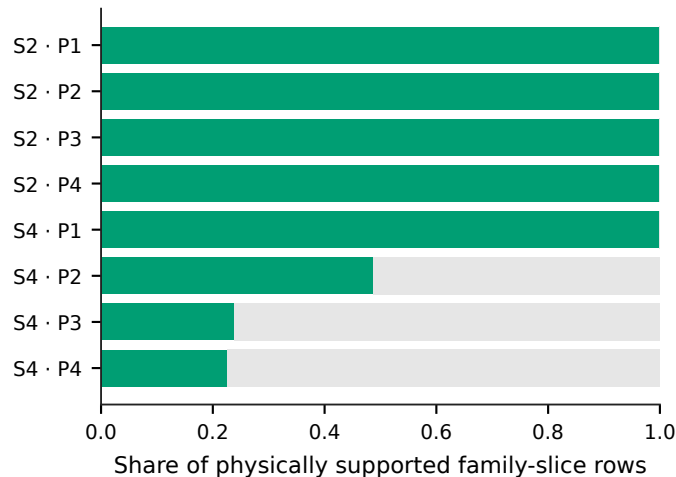

Learned reference available

Unavailable