

## 01. COMPUTATIONAL MODELS

- algorithm** → a well-defined procedure for finding the correct solution to the input
- correctness**
  - worst-case correctness** → correct on *every valid input*
  - other types of correctness: correct on random input/with high probability/approximately correct
- efficiency / running time** → measures the number of steps executed by an algorithm as a function of the *input size* (depends on computational model used)
  - number input: typically the length of binary representation
  - worst-case** running time → *max* number of steps executed when run on an input of size  $n$

**adversary argument** → inputs are decided such that they have different solutions

### Comparison Model

- algorithm can **compare** any two elements in one time unit ( $x > y, x < y, x = y$ )
- running time = number of pairwise comparisons made
- array can be manipulated at no cost

### Decision Tree


- each node is a comparison
- each branch is an outcome of the comparison
- each leaf is a class label (decision after *all* comparisons)
- worst-case** runtime = height of tree
- # of leaves = # of permutations ⇒  $\lg(n!) = \Theta(n \lg n)$

### Max Problem

*problem:* find largest element in array  $A$  of  $n$  distinct elements

*Proof.*  $n - 1$  comparisons are needed


fix an algorithm  $M$  that solves the Max problem on all inputs using  $< n - 1$  comparisons. construct graph  $G$  where nodes  $i$  and  $j$  are adjacent iff  $M$  compares  $i$  &  $j$ .

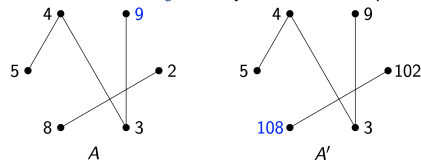

$M$  cannot differentiate  $A$  and  $A'$ .

### Second Largest Problem

- problem:* find the second largest element in  $< 2n - 3$  comparisons ( $2x$  Maximum ⇒  $(n-1) + ((n-1)-1) = 2n-3$ )
- solution:* **knockout tournament** ⇒  $n + \lceil \lg n \rceil - 2$

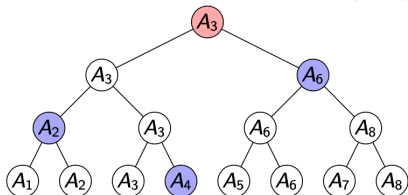

- bracket system:  $n - 1$  matches
  - every non-winner has lost exactly once
- then compare the elements that have lost to the largest
  - the 2nd largest element must have lost to the winner
  - compares  $\lceil \lg n \rceil$  elements that have lost to the winner using  $\lceil \lg n \rceil - 1$  comparisons

### Sorting

*Claim.* there is a sorting algorithm that requires  $\leq n \lg n - n + 1$  comparisons.

*Proof.* every sorting algorithm must make  $\geq \lg(n!)$  comparisons.

- let set  $\mathcal{U}$  be the set of all permutations of the set  $\{1, \dots, n\}$  that the adversary could choose as array  $A$ .  $|\mathcal{U}| = n!$
- for each query "is  $A_i > A_j$ ?", if  $\mathcal{U}_{yes} = \{A \in \mathcal{U} : A_i > A_j\}$  is of size  $\geq |\mathcal{U}|/2$ , set  $\mathcal{U} := \mathcal{U}_{yes}$ . else:  $\mathcal{U} := \mathcal{U} \setminus \mathcal{U}_{yes}$
- the size of  $\mathcal{U}$  decreases by at most half with each comparison
- with  $< \lg(n!)$  comparisons,  $\mathcal{U}$  will still contain at least 2 permutations

$$\begin{aligned} n! &\geq \left(\frac{n}{e}\right)^n \\ \Rightarrow \lg(n!) &\geq n \lg\left(\frac{n}{e}\right) = n \lg n - n \lg e \\ &\approx n \lg n - 1.44n \end{aligned}$$

⇒ roughly  $n \lg n$  comparisons are **required** and **sufficient** for sorting  $n$  numbers

### String Model

input	string of $n$ bits
each query	find out <b>one bit</b> of the string

- $n$  queries are **necessary** and **sufficient** to check if the input string is all 0s.
- query complexity** → number of bits of the input string queried by the algorithm
- evasive** → a problem requiring  $n$  query complexity

### Graph Model

input	(symmetric) adjacency matrix of an $n$ -node undirected graph
each query	find out if an edge is present between two chosen nodes (one entry of $G$ )

- evasive** → requires  $\binom{n}{2}$  queries
- Proof.* determining whether the graph is connected is evasive (requires  $\binom{n}{2}$  queries)
  - suppose  $M$  is an algorithm making  $\leq \binom{n}{2}$  queries.
  - whenever  $M$  makes a query, the algorithm tries not adding this edge, but adding all remaining unqueried edges.
    - if the resulting graph is connected,  $M$  replies 0 (i.e. edge does not exist)
    - else: replies 1 (edge exists)
  - after  $< \binom{n}{2}$  queries, at least one entry of the adjacency matrix is unqueried.

□

## 02. ASYMPTOTIC ANALYSIS

- algorithm** → a *finite* sequence of well-defined instructions to solve a given computational problem
- word-RAM model** → runtime is the total number of instructions executed
  - operators, comparisons, if, return, etc
  - each instruction operates on a *word* of data (limited size) ⇒ fixed constant amount of time

### Asymptotic Notations

**upper bound ( $\leq$ ):**  $f(n) = O(g(n))$   
if  $\exists c > 0, n_0 > 0$  such that  $\forall n \geq n_0$ ,  
 $0 \leq f(n) \leq cg(n)$

**lower bound ( $\geq$ ):**  $f(n) = \Omega(g(n))$   
if  $\exists c > 0, n_0 > 0$  such that  $\forall n \geq n_0$ ,  
 $0 \leq cg(n) \leq f(n)$

**tight bound:**  $f(n) = \Theta(g(n))$   
if  $\exists c_1, c_2, n_0 > 0$  such that  $\forall n \geq n_0$ ,  
 $0 \leq c_1 g(n) \leq f(n) \leq c_2 g(n)$

**$o$ -notation ( $<$ ):**  $f(n) = o(g(n))$   
if  $\forall c > 0, \exists n_0 > 0$  such that  $\forall n \geq n_0$ ,  
 $0 \leq f(n) < cg(n)$

**$\omega$ -notation ( $>$ ):**  $f(n) = \omega(g(n))$   
if  $\forall c > 0, \exists n_0 > 0$  such that  $\forall n \geq n_0$ ,  
 $0 \leq cg(n) < f(n)$

### Limits

Assume  $f(n), g(n) > 0$ .

$$\begin{aligned} \lim_{n \rightarrow \infty} \frac{f(n)}{g(n)} &= 0 && \Rightarrow f(n) = o(g(n)) \\ \lim_{n \rightarrow \infty} \frac{f(n)}{g(n)} &< \infty && \Rightarrow f(n) = O(g(n)) \\ 0 < \lim_{n \rightarrow \infty} \frac{f(n)}{g(n)} &< \infty && \Rightarrow f(n) = \Theta(g(n)) \\ \lim_{n \rightarrow \infty} \frac{f(n)}{g(n)} &> 0 && \Rightarrow f(n) = \Omega(g(n)) \\ \lim_{n \rightarrow \infty} \frac{f(n)}{g(n)} &= \infty && \Rightarrow f(n) = \omega(g(n)) \end{aligned}$$

*Proof.* using delta epsilon definition

### Properties of Big O

- $\Theta(g(n)) = O(g(n)) \cap \Omega(g(n))$
- transitivity** - applies for  $O, \Theta, \Omega, o, \omega$   
 $f(n) = O(g(n)) \wedge g(n) = O(h(n)) \Rightarrow f(n) = O(h(n))$
- reflexivity** - for  $O, \Omega, \Theta$ ,  $f(n) = O(f(n))$
- symmetry** -  $f(n) = \Theta(g(n)) \iff g(n) = \Theta(f(n))$
- complementarity** -
  - $f(n) = O(g(n)) \iff g(n) = \Omega(f(n))$
  - $f(n) = o(g(n)) \iff g(n) = \omega(f(n))$
- misc**
  - if  $f(n) = \omega(g(n))$ , then  $f(n) = \Omega(g(n))$
  - if  $f(n) = o(g(n))$ , then  $f(n) = O(g(n))$

$$\log \log n < \log n < (\log n)^k < n^k < k^n$$

insertion sort:  $O(n^2)$  with worst case  $\Theta(n^2)$

## 03. ITERATION, RECURSION, DIVIDE-AND-CONQUER

### Iterative Algorithms

- iterative** → loop(s), sequentially processing input elements
- loop invariant** implies correctness if
  - initialisation* - true before the first iteration of the loop
  - maintenance* - if true before an iteration, it remains true at the beginning of the next iteration
  - termination* - true when the algorithm terminates

### examples

- insertionSort**: with loop variable as  $j$ ,  $A[1..j-1]$  is sorted.
- selectionSort**: with loop variable as  $j$ , the array  $A[1..j-1]$  is sorted and contains the  $j-1$  smallest elements of  $A$ .
- Misra-Gries algorithm** (determines which bit occurs more in an  $n$ -bit array  $A$ ):
  - if there is an equal number of 0's and 1's, then  $id = \perp$  and  $count = 0$
  - if  $z \in \{0, 1\}$  is the majority element, then  $id = z$  and  $count$  equals the difference between the count of the bits.

### Divide-and-Conquer

#### powering a number

*problem:* compute  $f(n, m) = a^n \pmod{m}$  for all  $n, m \in \mathbb{Z}$

- observation:  $f(x + y, m) = f(x, m) * f(y, m) \pmod{m}$
- naive algorithm**: recursively compute and combine  
 $f(n-1, m) * f(1, m) \pmod{m}$   
 $T(n) = T(n-1) + T(1) + \Theta(1) \Rightarrow T(n) = \Theta(n)$
- better solution**: divide and conquer
  - divide: trivial
  - conquer: recursively compute  $f(\lfloor n/2 \rfloor, m)$
  - combine:
    - $f(n, m) = f(\lfloor n/2 \rfloor, m)^2 \pmod{m}$  if  $n$  is even
    - $f(n, m) = f(1, m) * f(\lfloor n/2 \rfloor, m)^2 \pmod{m}$  if odd
  - $T(n) = T(n/2) + \Theta(1) \Rightarrow \Theta(\log n)$

### Solving Recurrences


for  $a$  sub-problems of size  $\frac{n}{b}$  where  $f(n)$  is the time to divide and combine,


$$T(n) = aT\left(\frac{n}{b}\right) + f(n)$$

### Recursion tree

total = height  $\times$  number of leaves

- each node represents the cost of a single subproblem
- height of the tree = longest path from root to leaf

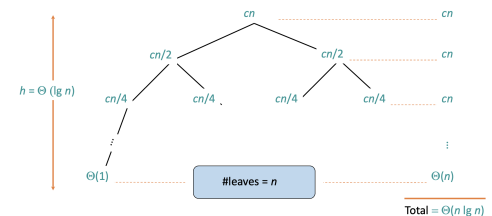



### Master method

$a \geq 1, b > 1$ , and  $f$  is asymptotically positive  
 $T(n) = aT(\frac{n}{b}) + f(n) =$   

$$\begin{cases} \Theta(n^{\log_b a}) & \text{if } f(n) < n^{\log_b a} \text{ polynomially} \\ \Theta(n^{\log_b a} \log n) & \text{if } f(n) = n^{\log_b a} \\ \Theta(f(n)) & \text{if } f(n) > n^{\log_b a} \text{ polynomially} \end{cases}$$

### three common cases

- If  $f(n) = O(n^{\log_b a - \epsilon})$  for some constant  $\epsilon > 0$ ,
  - $f(n)$  grows polynomially slower than  $n^{\log_b a}$  by  $n^\epsilon$  factor.
  - then  $T(n) = \Theta(n^{\log_b a})$ .
- If  $f(n) = \Theta(n^{\log_b a} \log^k n)$  for some  $k \geq 0$ ,
  - $f(n)$  and  $n^{\log_b a}$  grow at similar rates.
  - then  $T(n) = \Theta(n^{\log_b a} \log n)$
- If  $f(n) = \Omega(n^{\log_b a + \epsilon})$  for some constant  $\epsilon > 0$ ,
  - and  $f(n)$  satisfies the **regularity condition**
    - $af(n/b) \leq cf(n)$  for some constant  $c < 1$  and all sufficiently large  $n$ ,
    - this guarantees that the sum of subproblems is smaller than  $f(n)$ .
  - $f(n)$  grows polynomially faster than  $n^{\log_b a}$  by  $n^\epsilon$  factor
  - then  $T(n) = \Theta(f(n))$ .

### Substitution method

- guess that  $T(n) = O(f(n))$ .
- verify by induction:
  - to show that for  $n \geq n_0, T(n) \leq c \cdot f(n)$
  - set  $c = \max\{2, q\}$  and  $n_0 = 1$
  - verify base case(s):  $T(n_0) = q$
  - recursive case ( $n > n_0$ ):
    - by strong induction, assume  $T(k) \leq c \cdot f(k)$  for  $n > k \geq n_0$
    - $T(n) = \langle \text{recurrence} \rangle \dots \leq c \cdot f(n)$
- hence  $T(n) = O(f(n))$ .

! may not be a tight bound!

### example

*Proof.*  $T(n) = 4T(n/2) + n^2 / \lg n \Rightarrow \Theta(n^2 \lg \lg n)$   

$$\begin{aligned} T(n) &= 4T(n/2) + \frac{n^2}{\lg n} \\ &= 4(4T(n/4) + \frac{(n/2)^2}{\lg n - \lg 2}) + \frac{n^2}{\lg n} \\ &= 16T(n/4) + \frac{n^2}{\lg n - \lg 2} + \frac{n^2}{\lg n} \\ &= \sum_{k=1}^{\lg n} \frac{n^2}{\lg n - k} \\ &= n^2 \lg \lg n \text{ by approx. of harmonic series } (\sum \frac{1}{k}) \end{aligned}$$

*Proof.*  $T(n) = 4T(n/2) + n \Rightarrow O(n^2)$   
 To show that for all  $n \geq n_0, T(n) \leq c_1 n^2 - c_2 n$   
 1. Set  $c_1 = q + 1, c_2 = 1, n_0 = 1$ .

- Base case ( $n = 1$ ): subbing into  $c_1 n^2 - c_2 n$ ,  
 $T(1) = q \leq (q + 1)(1)^2 - (1)(1)$
- Recursive case ( $n > 1$ ):
  - by strong induction, assume  $T(k) \leq c_1 \cdot k^2 - c_2 \cdot k$  for all  $n > k \geq 1$
  - $T(n) = 4T(n/2) + n$   
 $= 4(c_1(n/2)^2 - c_2(n/2)) + n$   
 $= c_1 n^2 - 2c_2 n + n$   
 $= c_1 n^2 - c_2 n + (1 - c_2)n$   
 $= c_1 n^2 - c_2 n$  since  $c_2 = 1 \Rightarrow 1 - c_2 = 0$

## 04. AVERAGE-CASE ANALYSIS & RANDOMISED ALGORITHMS

- average case**  $A(n) \rightarrow$  expected running time when the input is chosen uniformly at random from the set of all  $n!$  permutations
  - $A(n) = \frac{1}{n!} \sum_{\pi} Q(\pi)$  where  $Q(\pi)$  is the time complexity when the input is permutation  $\pi$ .
  - $A(n) = \mathbb{E}_{x \sim \mathcal{D}_n} [\text{Runtime of Alg on } x]$ 
    - $\mathbb{E}_{x \sim \mathcal{D}_n}$  is a probability distribution on  $U$  restricted to inputs of size  $n$ .

### Quicksort Analysis

- divide & conquer, linear-time  $\Theta(n)$  partitioning subroutine
- assume we select the first array element as pivot
- $T(n) = T(j) + T(n - j - 1) + \Theta(n)$ 
  - if the pivot produces subarrays of size  $j$  and  $(n - j - 1)$
- worst-case:**  $T(n) = T(0) + T(n - 1) + \Theta(n) \Rightarrow \Theta(n^2)$

*Proof.* for quicksort,  $A(n) = O(n \log n)$   
 let  $P(i)$  be the set of all those permutations of elements  $\{e_1, e_2, \dots, e_n\}$  that begins with  $e_i$ .  
 Let  $G(n, i)$  be the average running time of quicksort over  $P(i)$ . Then  
 $G(n) = \frac{1}{n} \sum_{i=1}^n G(n, i)$   
 $A(n) = \frac{1}{n} \sum_{i=1}^n G(n, i)$   
 $= \frac{1}{n} \sum_{i=1}^n (A(i - 1) + A(n - i) + (n - 1))$   
 $= \frac{2}{n} \sum_{i=1}^n A(i - 1) + n - 1$   
 $= O(n \log n)$  by taking it as area under integration

### quicksort vs mergesort

	average	best	worst
quicksort	$1.39n \lg n$	$n \lg n$	$n(n - 1)$
mergesort	$n \lg n$	$n \lg n$	$n \lg n$

- disadvantages of mergesort:
  - overhead of temporary storage
  - cache misses
- advantages of quicksort
  - in place
  - reliable (as  $n \uparrow$ , chances of deviation from avg case  $\downarrow$ )
- issues with quicksort
  - distribution-sensitive**  $\rightarrow$  time taken depends on the initial (input) permutation

## Randomised Algorithms

- randomised algorithms**  $\rightarrow$  output and running time are **functions** of the **input** and **random bits chosen**
  - vs non-randomised: output & running time are functions of the *input only*
- expected running time = worst-case running time =  
 $E(n) = \max_{\text{input } x \text{ of size } n} \mathbb{E}[\text{Runtime of RandAlg on } x]$
- randomised quicksort**: choose pivot at random
  - probability that the runtime of *randomised* quicksort exceeds average by  $x\% = n^{-\frac{x}{100} \ln \ln n}$
  - P(time takes at least double of the average) =  $10^{-15}$
  - distribution insensitive

### Randomised Quicksort Analysis

$T(n) = n - 1 + T(q - 1) + T(n - q)$   
 Let  $A(n) = \mathbb{E}[T(n)]$  where the expectation is over the randomness in expectation.  
 Taking expectations and applying linearity of expectation:  
 $A(n) = n - 1 + \frac{1}{n} \sum_{q=1}^n (A(q - 1) + A(n - q))$   
 $= n - 1 + \frac{2}{n} \sum_{q=1}^{n-1} A(q)$   
 $A(n) = n \log n \Rightarrow$  same as average case quicksort

### Randomised Quickselect

- $O(n)$  to find the  $k^{th}$  smallest element
- randomisation: unlikely to keep getting a bad split

### Types of Randomised Algorithms

- randomised **Las Vegas** algorithms
  - output is always correct
  - runtime is a *random variable*
  - e.g. randomised quicksort, randomised quickselect
- randomised **Monte Carlo** algorithms
  - output may be incorrect with some small probability
  - runtime is *deterministic*

### examples

- smallest enclosing circle**: given  $n$  points in a plane, compute the smallest radius circle that encloses all  $n$  points
  - best **deterministic** algorithm:  $O(n)$ , but complex
  - las vegas: average  $O(n)$ , simple solution
- minimum cut**: given a connected graph  $G$  with  $n$  vertices and  $m$  edges, compute the smallest set of edges whose removal would disconnect  $G$ .
  - best **deterministic** algorithm:  $O(mn)$
  - monte carlo**:  $O(m \log n)$ , error probability  $n^{-c}$  for any  $c$
- primality testing**: determine if an  $n$  bit integer is prime
  - best **deterministic** algorithm:  $O(n^6)$
  - monte carlo**:  $O(kn^2)$ , error probability  $2^{-k}$  for any  $k$

## Geometric Distribution

Let  $X$  be the number of trials repeated until success.  
 $X$  is a random variable and follows a geometric distribution with probability  $p$ .  
 Expected number of trials,  $E[X] = \frac{1}{p}$   
 $Pr[X = k] = q^{k-1}p$

## Linearity of Expectation

For any two events  $X, Y$  and a constant  $a$ ,  
 $E[X + Y] = E[X] + E[Y]$   
 $E[aX] = aE[X]$

## Coupon Collector Problem

$n$  types of coupon are put into a box and randomly drawn with replacement. What is the expected number of draws needed to collect at least one of each type of coupon?

• let  $T_i$  be the time to collect the  $i$ -th coupon after the  $i - 1$  coupon has been collected.

- Probability of collecting a new coupon,  $p_i = \frac{(n - (i - 1))}{n}$
- $T_i$  has a **geometric distribution**
- $E[T_i] = 1/p_i$

• total number of draws,  $T = \sum_{i=1}^n T_i$

•  $E[T] = E[\sum_{i=1}^n T_i] = \sum_{i=1}^n E[T_i]$  by linearity of expectation  
 $= \sum_{i=1}^n \frac{n}{n - (i - 1)} = n \cdot \sum_{i=1}^n \frac{1}{i} = \Theta(n \lg n)$

## 05. HASHING

### Dictionary ADT

- different types:
  - static** - fixed set of inserted items; only care about queries
  - insertion-only** - only insertions and queries
  - dynamic** - insertions, deletions, queries
- implementations
  - sorted list (static) -  $O(\log N)$  query
  - balanced search tree (dynamic) -  $O(\log N)$  all operations
  - direct access table
    - $\times$  needs items to be represented as non-negative integers (**prehashing**)
    - $\times$  huge space requirement
- using  $\mathcal{H}$  for dictionaries: need to store both the hash table and the matrix  $A$ .
  - additional storage overhead =  $\Theta(\log N \cdot \log |U|)$ , if  $M = \Theta(N)$
  - other universal hashing constructions may have more efficient hash function evaluation
- associative array** - has both key and value (dictionary in this context has only key)

## Hashing

- hash function**,  $h : U \rightarrow \{1, \dots, M\}$  gives the location of where to store in the hash table
  - notation:  $[M] = \{1, \dots, M\}$   $[M] = \{1, \dots, M\}$
  - storing  $N$  items in hash table of size  $M$
- collision**  $\rightarrow$  for two different keys  $x$  and  $y$ ,  $h(x) = h(y)$ 
  - resolve by **chaining**, **open addressing**, etc
- desired properties
  - $\checkmark$  minimise collisions - query(x) and delete(x) take time  $\Theta(|h(x)|)$
  - $\checkmark$  minimise storage space - aim to have  $M = O(N)$
  - $\checkmark$  function  $h$  is easy to compute (assume constant time)
- if  $|U| \geq (N - 1)M + 1$ , for any  $h : U \rightarrow [M]$ , there is a set of  $N$  elements having the same hash value.
  - Proof*: pigeonhole principle
- use **randomisation** to overcome the adversary

- e.g. randomly choose between two *deterministic* hash functions  $h_1$  and  $h_2$   
 $\Rightarrow$  for any pair of keys, with probability  $\geq \frac{1}{2}$ , there will be no collision

### Universal Hashing

Suppose  $\mathcal{H}$  is a set of hash functions mapping  $U$  to  $[M]$ .

- $\mathcal{H}$  is **universal** if  $\forall x \neq y, \frac{|\{h \in \mathcal{H}: h(x)=h(y)\}|}{|\mathcal{H}|} \leq \frac{1}{M}$   
or  $\Pr_{h \sim \mathcal{H}}[h(x) = h(y)] \leq \frac{1}{M}$
- aka: for any  $x \neq y$ , if  $h$  is chosen uniformly at random from a universal  $\mathcal{H}$ , then there is at most  $\frac{1}{M}$  probability that  $h(x) = h(y)$
- probability where  $h$  is sampled uniformly from  $\mathcal{H}$
- aka: for any  $x \neq y$ , the fraction of hash functions with collisions is at most  $\frac{1}{M}$ .

#### Properties of universal hashing

##### Collision Analysis

- for any  $N$  elements  $x_1, \dots, x_N \in \mathcal{U}$ , the **expected number of collisions** between  $x_N$  and other elements is  $< N/M$ .
  - it follows that for  $K$  operations, the expected cost of the last operation is  $< K/M = O(1)$  if  $M > K$ .

*Proof.* by definition of Universal Hashing, each element  $x_1, \dots, x_{N-1} \in \mathcal{U}$  has at most  $\frac{1}{M}$  probability of collision with  $x_N$  (over random choice of  $h$ ).  
by indicator r.v.,  $E[A_i] = P(A_i=1) \leq \frac{1}{M}$ . expected number of collisions =  $(N-1) \cdot \frac{1}{M} < \frac{N}{M}$ .

- if  $x_1, \dots, x_N$  are added to the hash table, and  $M > N$ , the expected **number of pairs**  $(i, j)$  with collisions is  $< 2N$ .

*Proof.* let  $A_{ij}$  be an indicator r.v. for collision.

$$\begin{aligned} \mathbb{E}[\sum_{1 \leq i, j \leq N} A_{ij}] &= \sum_{i=1}^N \mathbb{E}[A_{ii}] + \sum_{i \neq j} \mathbb{E}[A_{ij}] \\ &\leq N \cdot 1 + N(N-1) \cdot \frac{1}{M} < 2N \end{aligned}$$

##### Expected Cost

- for any sequence of  $N$  operations, if  $M > N$ , then the **expected total cost** for executing the sequence is  $O(N)$ .

*Proof.* linearity of expectation; sum up expected costs

#### Construction of Universal Family

Obtain a universal family of hash functions with  $M = O(N)$ .

- Suppose  $U$  is indexed by  $u$ -bit strings and  $M = 2^m$ .
- For any  $m \times u$  binary matrix  $A, h_A(x) = Ax \pmod{2}$ 
  - each element  $x \Rightarrow x \% 2$
  - $x$  is a  $u \times 1$  matrix  $\Rightarrow Ax$  is  $m \times 1$
- Claim:*  $\{h_A : A \in \{0, 1\}^{m \times u}\}$  is universal
- e.g.  $U = \{00, 01, 10, 11\}, M = 2$ 
  - $h_{ab}$  means  $A = \begin{bmatrix} a & b \end{bmatrix}$

	00	01	10	11
$h_{00}$	0	0	0	0
$h_{01}$	0	1	0	1
$h_{10}$	0	0	1	1
$h_{11}$	0	1	1	0

*Proof.* Let  $x \neq y$ . Let  $z = x - y$ . We know  $z \neq 0$ .

Collision:  $P(Ax = Ay) = P[A(x-y)=0] = P(Az=0)$ .

To show  $P(Az = 0) \leq \frac{1}{M}$ .

*Special case* - Suppose  $z$  is 1 at the  $i$ -th coordinate but 0 everywhere else. Then  $Az$  is the  $i$ -th column of  $A$ . Since the  $i$ -th column is uniformly random,  $P(Az = 0) = \frac{1}{2^m} = \frac{1}{M}$ .

*General case* - Suppose  $z$  is 1 at the  $i$ -th coordinate. Let  $z = [z_1 \ z_2 \ \dots \ z_u]^T$ .  $A = [A_1 \ A_2 \ \dots \ A_u]$  hence  $A_k$  is the  $k$ -th column of  $A$ . Then  $Az = z_1 A_1 + z_2 A_2 + \dots + z_u A_u$ .  
 $Az = 0 \Rightarrow z_1 A_1 = -(z_2 A_2 + \dots + z_u A_u)$  (\*)  
We fix  $z_1 A_1$  to be an arbitrary  $m \times 1$  matrix of 1s and 0s. The probability that (\*) holds is  $\frac{1}{2^m}$ .

### Perfect Hashing

**static case** -  $N$  fixed items in the dictionary  $x_1, x_2, \dots, x_N$   
To perform Query in  $O(1)$  *worst-case time*.

#### Quadratic Space: $M = N^2$

if  $\mathcal{H}$  is universal and  $M = N^2$ , and  $h$  is sampled uniformly from  $\mathcal{H}$ , then the expected number of collisions is  $< 1$ .

*Proof.* for  $i \neq j$ , let indicator r.v.  $A_{ij}$  be equal to 1 if  $h(x_i) = h(x_j)$ , or 0 otherwise.  
By universality,  $E[A_{ij}] = P(A_{ij} = 1) \leq 1/N^2$   
 $E[\text{\# collisions}] = \sum_{i < j} E[A_{ij}] \leq \binom{N}{2} \frac{1}{N^2} < 1$

It follows that there exists  $h \in \mathcal{H}$  causing no collisions (because if not,  $\mathbb{E}[\text{\# collisions}]$  would be  $\geq 1$ ).

#### 2-Level Scheme: $M = N$

- No collision and less space needed

##### Construction

Choose  $h : U \rightarrow [N]$  from a universal hash family.

- Let  $L_k$  be the number of  $x_i$ 's for which  $h(x_i) = k$ .
- Choose  $h_1, \dots, h_N$  **second-level** hash functions  $h_k : [N] \rightarrow [(L_k)^2]$  s.t. there are no collisions among the  $L_k$  elements mapped to  $k$  by  $h$ .
  - quadratic second-level table  $\rightarrow$  ensures no collisions using quadratic space

##### Analysis

if  $\mathcal{H}$  is universal and  $h$  is sampled uniformly from  $\mathcal{H}$ , then

$$E \left[ \sum_k L_k^2 \right] < 2N$$

*Proof.* For  $i, j \in [1, N]$ , define indicator r.v.  $A_{ij} = 1$  if  $h(x_i) = h(x_j)$ , or 0 otherwise.

$A_{ij} = \text{\# possible collisions} = \text{\# pairs} * 2 = L_k^2$   
Hence  $\sum_k L_k^2 = \sum_{i, j} A_{ij}$

$$\begin{aligned} E[\sum_{i, j} A_{ij}] &= \sum_i E[A_{ii}] + \sum_{i \neq j} E[A_{ij}] \\ &\leq N \cdot 1 + N(N-1) \cdot \frac{1}{N} \\ &< 2N \end{aligned}$$

### Hash Table Resizing

- when number of inserted items,  $N$  is not known
  - reshashing** - choose a new hash function of a larger size and re-hash all elements
  - costly but infrequent  $\Rightarrow$  amortize

## 06. FINGERPRINTING & STREAMING

### String Pattern Matching

*problem:* does the pattern string  $P$  occur as a substring of the text string  $T$ ?

$m$  = length of  $P$ ,  $n$  = length of  $T$ ,  $\ell$  = size of alphabet

- assumption: operations on strings of length  $O(\log n)$  can be executed in  $O(1)$  time. (word-RAM model)
- naive solution:  $\Theta(n^2)$

#### Fingerprinting approach (Karp-Rabin)

- faster string equality check:
  - for substring  $X$ , check  $h(X) == h(P)$  for a hash function  $h \Rightarrow O(1)$  + cost of hashing instead of  $\Theta(|X|)$
- Rolling Hash:**  $O(m + n)$ 
  - update the hash from what we already have from the previous hash -  $O(1)$
  - compute  $n - m + 1$  hashes in  $O(n)$  time
  - Monte Carlo algorithm

#### Division Hash

Choose a random **prime** number  $p$  in the range  $\{1, \dots, K\}$ .  
For integer  $x, h_p(x) = x \pmod{p}$

- if  $p$  is small and  $x$  is  $b$ -bits long in binary, hashing  $\Rightarrow O(b)$
- hash family  $\{h_p\}$  is approximately universal
- if  $0 \leq x < y < 2^b$ , then  $\Pr_h[h_p(x) = h_p(y)] < \frac{b \ln K}{K}$

*Proof.*  $h_p(x) = h_p(y)$  when  $y - x = 0 \pmod{p}$ .  
Let  $z = y - x$ .  
Since  $z < 2^b$ , then  $z$  can have at most  $b$  distinct prime factors.  
 $p$  divides  $z$  if  $p$  is one of these  $\leq b$  prime factors.  
number of primes in range  $\{1, \dots, K\}$  is  $> \frac{K}{\ln K}$ ,  
hence the probability is  $b / \frac{K}{\ln K} = \frac{b \ln K}{K}$

##### values of K

- higher  $K$  = lower probability of false positive
  - for  $\delta = \frac{1}{100n}$ , P(false positive)  $< 1\%$ .
- $\forall \delta > 0$ , if  $X \neq Y$  and  $K = \frac{2m}{\delta} \cdot \lg \ell \cdot \lg(\frac{2m}{\delta} \lg \ell)$ , then  $\Pr[h(X) = h(Y)] < \delta$

### Streaming

*problem:* Consider a sequence of insertions or deletions of items from a large universe  $\mathcal{U}$ . At the end of the stream, the *frequency*  $f_i$  of item  $i$  is its net count.

Let  $M$  be the sum of all frequencies at the end of stream.

##### naive solutions

- direct access table -  $\Omega(U)$  space
- sorted list -  $\Omega(M)$  space, no  $O(1)$  update
- binary search tree -  $O(M)$  space

### Frequency Estimation

an approximation  $\hat{f}_i$  is  **$\epsilon$ -approximate** if  
 $f_i - \epsilon M \leq \hat{f}_i \leq f_i + \epsilon M$

#### Using Hash Table

- $$f_i \leq \mathbb{E}[\hat{f}_i] \leq f_i + M/k$$
- increment/decrement  $A[h(j)]$  on an empty table  $A$  of size  $k$
  - collision  $\Rightarrow$  false positives  $\Rightarrow$  may give overestimate of  $f_i$ 
    - $A[h(i)] = \sum_{j: h(j)=h(i)} f_j \geq f_i$
  - if  $h$  is drawn from a universal family, overestimate,  $\mathbb{E}[A[h(i)] - f_i] \leq M/k$
  - space:  $O(\frac{1}{\epsilon} \cdot \lg M + \lg U \cdot \lg M)$   
let  $k = \frac{1}{\epsilon}$  for some  $\epsilon > 0$ .
    - number of rows =  $O(\frac{1}{\epsilon})$
    - size of each row =  $O(\lg M)$
    - size of hash function (using universal hash family from ch.05) =  $O(\lg U \cdot \lg M)$
  - Count-Min Sketch**  $\rightarrow$  gives a bound on the probability that  $\hat{f}_i$  deviates from  $f_i$  instead of a bound on the expectation of the gap

## 07. AMORTIZED ANALYSIS

- amortized analysis**  $\rightarrow$  guarantees the *average* performance of each operation in the *worst case*.
- For a sequence of  $n$  operations  $o_1, o_2, \dots, o_n$ ,
  - let  $t(i)$  be the time complexity of the  $i$ -th operation  $o_i$
  - let  $f(n)$  be the *worst-case* time complexity for *any* of the  $n$  operations
  - let  $T(n)$  be the time complexity of all  $n$  operations

$$T(n) = \sum_{i=1}^n t(i) = n f(n)$$

### Types of Amortized Analysis

#### Aggregate method

- look at the whole sequence, sum up the cost of operations and take the average - simpler but less precise
- e.g. binary counter - amortized  $O(1)$
- e.g. queues (with INSERT and EMPTY) - amortized  $O(1)$

#### Accounting method

- charge the  $i$ -th operation a fictitious amortized cost  $c(i)$ 
  - amortized cost**  $c(i)$  is a fixed cost for each operation
  - true cost**  $t(i)$  depends on when the operation is called
- amortized cost  $c(i)$  must satisfy:

$$\sum_{i=1}^n t(i) \leq \sum_{i=1}^n c(i) \text{ for all } n$$

- take the extra amount for cheap operations early on as "credit" paid in advance for expensive operations
  - invariant:** bank balance never drops below 0
- the total amortized cost provides an **upper bound** on the total true cost

#### Potential method

- $\phi$  : potential function associated with the algo/DS
- $\phi(i)$ : potential at the end of the  $i$ -th operation
- $c_i$  : amortized cost of the  $i$ -th operation
- $t_i$  : true cost of the  $i$ -th operation

$$c_i = t_i + \phi(i) - \phi(i-1)$$

$$\sum_{i=1}^n c_i = \phi(n) - \phi(0) + \sum_{i=1}^n t_i$$

- hence as long as  $\phi(n) \geq 0$ , then amortized cost is an upper bound of the true cost.

$$\sum_{i=1}^n c_i \geq \sum_{i=1}^n t_i$$


- usually take  $\phi(0) = 0$



- e.g. for queue:
  - let  $\phi(i) = \#$  of elements in queue after the  $i$ -th operation
  - amortized cost for insert:  $c_i = t_i + \phi(i) - \phi(i-1) = 1 + 1 = 2$
  - amortized cost for empty (for  $k$  elements):  $c_i = t_i + \phi(i) - \phi(i-1) = k + 0 - k = 0$

e.g. Dynamic Table (insertion only)


Aggregate method

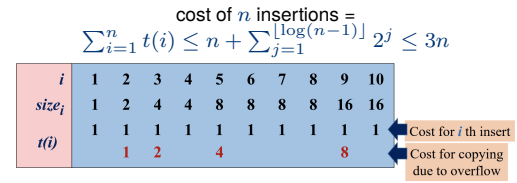

Accounting method

- charge \$3 per insertion
  - \$1 for insertion itself
  - \$1 for moving itself when the table expands
  - \$1 for moving one of the existing items when the table expands

Potential method

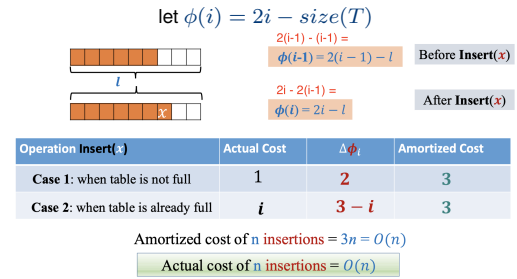

## 08. DYNAMIC PROGRAMMING

- cut-and-paste proof** → proof by contradiction - suppose you have an optimal solution. Replacing ("cut") subproblem solutions with this subproblem solution ("paste" in) should improve the solution. If the solution doesn't improve, then it's not optimal (contradiction).

### Longest Common Subsequence

- for sequence  $A : a_1, a_2, \dots, a_n$  stored in array
- $C$  is a **subsequence** of  $A \rightarrow$  if we can obtain  $C$  by removing zero or more elements from  $A$ .

**problem:** given two sequences  $A[1..n]$  and  $B[1..m]$ , compute the *longest* sequence  $C$  such that  $C$  is a subsequence of  $A$  and  $B$ .

brute force solution


- check *all* possible subsequences of  $A$  to see if it is also a subsequence of  $B$ , then output the longest one.
- analysis:  $O(m2^n)$ 
  - checking each subsequence takes  $O(m)$
  - $2^n$  possible subsequences

recursive solution

- let  $LCS(i, j)$ : longest common subsequence of  $A[1..i]$  and  $B[1..j]$
- base case:  $LCS(i, 0) = \emptyset$  for all  $i$ ,  $LCS(0, j) = \emptyset$  for all  $j$
  - general case:
    - if last characters of  $A, B$  are  $a_n = b_m$ , then  $LCS(n, m)$  must terminate with  $a_n = b_m$ 
      - the optimal solution will match  $a_n$  with  $b_m$
    - if  $a_n \neq b_m$ , then either  $a_n$  or  $b_m$  is not the last symbol
  - optimal substructure:** (general case)
    - if  $a_n = b_m$ ,  $LCS(n, m) = LCS(n-1, m-1) :: a_n$
    - if  $a_n \neq b_m$ ,  $LCS(n, m) = LCS(n-1, m) || LCS(n, m-1)$
  - simplified problem:**
    - $L(n, m) = 0$  if  $n = 0$  or  $m = 0$
    - if  $a_n = b_m$ , then  $L(n, m) = L(n-1, m-1) + 1$
    - if  $a_n \neq b_m$ , then  $L(n, m) = \max(L(n, m-1), L(n-1, m))$
  - analysis**
    - number of distinct subproblems =  $(n+1) \times (m+1)$
    - to use  $O(\min\{m, n\})$  space: bottom-up approach, column by column
    - memoize for DP  $\Rightarrow$  makes it  $O(mn)$  instead of exponential time

### Knapsack Problem

- input:  $(w_1, v_1), (w_2, v_2), \dots, (w_n, v_n)$  and capacity  $W$
- output: subset  $S \subseteq \{1, 2, \dots, n\}$  that maximises  $\sum_{i \in S} v_i$  such that  $\sum_{i \in S} w_i \leq W$

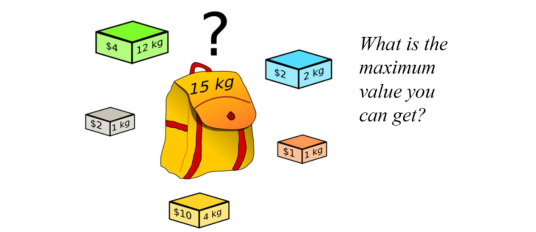

- $2^n$  subsets  $\Rightarrow$  naive algorithm is costly
- recursive solution:**
  - let  $m[i, j]$  be the maximum value that can be obtained using a subset of items  $\{1, 2, \dots, i\}$  with total weight no more than  $j$ .
  - $m[i, j] = \begin{cases} 0, & \text{if } i = 0 \text{ or } j = 0 \\ \max\{m[i-1, j-w_i] + v_i, m[i-1, j]\}, & \text{if } w_i \leq j \\ m[i-1, j], & \text{otherwise} \end{cases}$
- analysis:**  $O(nW)$ 
  - $O(nW)$  is **not** a polynomial time algorithm
  - not polynomial in input bitsize
    - $W$  can be represented in  $O(\lg W)$  bits
    - $n$  can be represented in  $O(\lg n)$  bits
  - polynomial time is strictly in terms of the number of bits for the input

### Changing Coins

**problem:** use the fewest number of coins to make up  $n$  cents using denominations  $d_1, d_2, \dots, d_n$ . Let  $M[j]$  be the fewest

number of coins needed to change  $j$  cents.

- optimal substructure:**

$$M[j] = \begin{cases} 1 + \min_{i \in [k]} M[j - d_i], & j > 0 \\ 0, & j = 0 \\ \infty, & j < 0 \end{cases}$$
- Proof.* Suppose  $M[j] = t$ , meaning  $j = d_{i_1} + d_{i_2} + \dots + d_{i_t}$  for some  $i_1, \dots, i_t \in \{1, \dots, k\}$ .
- Then, if  $j' = d_{i_1} + d_{i_2} + \dots + d_{i_{t-1}}$ ,  $M[j'] = t-1$ , because otherwise if  $M[j'] < t-1$ , by **cut-and-paste** argument,  $M[j] < t$ .

## 09. GREEDY ALGORITHMHS

- solve only one subproblem at each step
- beats DP and divide-and-conquer when it works
- greedy-choice property** → a locally optimal choice is globally optimal

### Examples

#### Fractional Knapsack

- $O(n \log n)$
- greedy-choice property:** let  $j^*$  be the item with *maximum* value/kg,  $v_j/w_j$ . Then there exists an optimal knapsack containing  $\min(w_{j^*}, W)$  kg of item  $j^*$ .
- optimal substructure:** if we remove  $w$  kg of item  $j$  from the optimal knapsack, then the remaining load must be the optimal knapsack weighing at most  $W - w$  kgs that one can take from  $n-1$  original items and  $w_j - w$  kg of item  $j$ .

*Proof.* cut-and-paste argument

Suppose the remaining load after removing  $w$  kgs of item  $j$  was *not* the optimal knapsack weighing ...

Then there is a knapsack of value  $> X - v_j \cdot \frac{w}{w_j}$  with weight ...

Combining this knapsack with  $w$  kg of item  $j$  gives a knapsack of value  $> X \Rightarrow$  contradiction!

### Minimum Spanning Trees

for a connected, undirected graph  $G = (V, E)$ , find a spanning tree  $T$  that connects all vertices with minimum weight. Weight of spanning tree  $T$ ,  $w(T) = \sum_{(u,v) \in T} w(u, v)$ .

- optimal substructure:** let  $T$  be a MST. remove any edge  $(u, v) \in T$ . then  $T$  is partitioned into  $T_1, T_2$  which are MSTs of  $G_1 = (V_1, E_1)$  and  $G_2 = (V_2, E_2)$ .
 

*Proof.* cut-and-paste:  $w(T) = w(u, v) + w(T_1) + w(T_2)$

if  $w(T'_1) < w(T_1)$  for  $G_1$ , then  $T' = \{(u, v)\} \cup T'_1 \cup T_2$  would be a lower-weight spanning tree than  $T$  for  $G$ .

$\Rightarrow$  contradiction,  $T$  is the MST

- Prim's algorithm** - at each step, add the least-weight edge from the tree to some vertex outside the tree
- Kruskal's algorithm** - at each step, add the least-weight edge that does *not* cause a cycle to form


## Binary Coding

Given an alphabet set  $A : \{a_1, a_2, \dots, a_n\}$  and a text file  $F$  (sequence of alphabets), how many bits are needed to encode a text file with  $m$  characters?

- fixed length encoding:**  $m \cdot \lceil \log_2 n \rceil$ 
  - encode each alphabet to unique binary string of length  $\lceil \log_2 n \rceil$
  - total bits needed for  $m$  characters =  $m \cdot \lceil \log_2 n \rceil$
- variable length encoding**
  - different characters occur with different frequency  $\Rightarrow$  use fewer bits for *more frequent* alphabets
  - average bit length,  $ABL(\gamma) = \sum_{x \in A} f(x) \cdot |\gamma(x)|$
  - BUT overlapping prefixes cause indistinguishable characters

### Prefix coding

- a coding  $\gamma(A)$  is a **prefix coding** if  $\nexists x, y \in A$  such that  $\gamma(x)$  is a prefix of  $\gamma(y)$ .
- labelled binary tree:**  $\gamma(A)$  = label of path from root

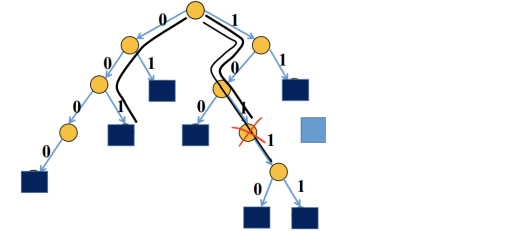


- for each prefix code  $A$  of  $n$  alphabets, there exists a binary tree  $T$  on  $n$  leaves such that there is a **bijective mapping** between the alphabets and the leaves
- $ABL(\gamma) = \sum_{x \in A} f(x) \cdot |\gamma(x)| = \sum_{x \in A} f(x) \cdot |depth_T(x)|$
- the binary tree corresponding to an *optimal* prefix coding must be a **full binary tree**.
  - every internal node has degree exactly 2
  - multiple possible optimal trees - most optimal depends on alphabet frequencies
- accounting for alphabet **frequencies:**
  - let  $a_1, a_2, \dots, a_n$  be the alphabets of  $A$  in non-decreasing order of their frequencies.
  - $a_1$  must be a leaf node;  $a_2$  can be a sibling of  $a_1$ .
  - there exists an optimal prefix coding in which  $a_1$  and  $a_2$  are siblings
- derivation of optimal prefix coding: **Huffman's algorithm**
  - keep merging the two least frequent items

Huffman(C):

```

Q = new PriorityQueue(C)
while Q:
    allocate a new node z
    z.left = x = extractMin(Q)
    z.right = y = extractMin(Q)
    z.val = x.val + y.val
    Q.add(z)
return extractMin(Q) // root
  
```




10. REDUCTIONS & INTRACTABILITY

Reduction

Consider two problems *A* and *B*, *A* can be solved as follows:

- 1. convert instance  $\alpha$  of *A* to an instance of  $\beta$  in *B*
- 2. solve  $\beta$  to obtain a solution
- 3. based on the solution of  $\beta$ , obtain the solution of  $\alpha$ .
- 4.  $\Rightarrow$  then we say *A* reduces *B*.



instance  $\rightarrow$  another word for input

e.g. Matrix Multiplication & Squaring

- MAT-MULTI: matrix multiplication
  - input: two  $N \times N$  matrices *A* and *B*.
  - output:  $A \times B$
- MAT-SQR: matrix squaring
  - input: one  $N \times N$  matrix *C*.
  - output:  $C \times C$
- MAT-SQR can be reduced to MAT-MULTI
  - Proof. Given input matrix *C* for MAT-SQR, let  $A = C$  and  $B = C$  be inputs for MAT-MULTI. Then  $AB = C^2$ .
- MAT-MULTI can also be reduced to MAT-SQR!


T-Sum

- o-Sum: given array *A*, output  $i, j \in (1, n)$  such that  $A[i] + A[j] = 0$
- T-Sum: given array *B*, output  $i, j \in (1, n)$  such that  $B[i] + B[j] = T$
- reduce T-SUM to o-SUM:
  - given array *B*, define array *A* such that  $A[i] = B[i] - T/2$ .
  - if  $i, j$  satisfy  $A[i] + A[j] = 0$ , then  $B[i] + B[j] = T$ .

p(n)-time Reduction

- **p(n)-time Reduction**  $\rightarrow$  if for any instance  $\alpha$  of problem *A* of size *n*,
  - an instance  $\beta$  for *B* can be constructed in *p(n)* time
  - a solution to problem *A* for input  $\alpha$  can be recovered from a solution for problem *B* for input  $\beta$  in time *p(n)*.

• ! *n* is in bits!

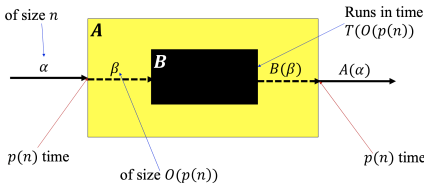

- $A \leq_P B \rightarrow$  if there is a *p(n)*-time reduction from *A* to *B* for some polynomial function  $p(n) = O(n^c)$  for some constant *c*. ("*A* is a special case of *B*")
  - if *B* has a polynomial time algorithm, then so does *A*
  - "polynomial time"  $\approx$  reasonably efficient

Polynomial Time

- **polynomial time**  $\rightarrow$  runtime is polynomial in the **length of the encoding** of the problem instance
  - "standard" encodings - binary encoding of integers; list of parameters enclosed in braces (e.g. graphs, matrices)
- KNAPSACK is NOT polynomial time:  $O(nW \log M)$  but *W* is not the number of bits
- FRACTIONAL KNAPSACK is polynomial time:  $O(n \log n \log W \log M)$
- **pseudo-polynomial** algorithm  $\rightarrow$  runs in time polynomial in the **numeric value** if the input but is **exponential** in the **length** of the input
  - e.g. DP algo for KNAPSACK since *W* is in numeric value


Decision Problems

- **decision problem**  $\rightarrow$  a function that maps an instance space *I* to the solution set {YES, NO}
- decision vs optimisation problem:
  - **decision problem**: given a directed graph *G*, is there a path from vertex *u* to *v* of length  $\leq k$ ?
  - **optimisation problem**: given ..., what is the *length* of the shortest path ... ?
  - convert from **decision**  $\rightarrow$  **optimisation**: given an instance of the optimisation problem and a number *k*, is there a solution with value  $\leq k$ ?
- the decision problem is *no harder than* the optimisation problem.
  - given the optimal solution, check that it is  $\leq k$ .
  - if we cannot solve the decision problem quickly  $\Rightarrow$  then we cannot solve the optimisation problem quickly

Reductions between Decision Problems

given two decision problems *A* and *B*, a polynomial-time reduction from *A* to *B* denoted  $A \leq_P B$  is a **transformation** from instances  $\alpha$  of *A* and  $\beta$  of *B* such that

- 1.  $\alpha$  is a YES-instance of *A*  $\iff \beta$  is a YES-instance of *B*
- 2. the transformation takes polynomial time in the size of  $\alpha$



Examples

- INDEPENDENT-SET: given a graph  $G = (V, E)$  and an integer *k*, is there a subset of  $\leq k$  vertices such that no 2 are adjacent?
- VERTEX-COVER: given a graph  $G = (V, E)$  and an integer *k*, is there a subset of  $\leq k$  vertices such that each edge is incident to *at least one* vertex in this subset?
- INDEPENDENT-SET  $\leq_P$  VERTEX-COVER
  - **Reduction**: to check whether *G* has an independent set of size *k*, we check whether *G* has vertex cover of size  $n - k$ .

Proof. If INDEPENDENT-SET, then VERTEX-COVER.

Suppose  $(G, k)$  is a YES-instance of INDEP-SET. Then there is subset *S* of size  $\geq k$  that is an independent set.

$V - S$  is a vertex cover of size  $\leq n - k$ . Proof: Let  $(u, v) \in E$ . Then  $u \notin S$  or  $v \notin S$ .

So either *u* or *v* is in  $V - S$ , the vertex cover.

Proof. If VERTEX-COVER, then INDEPENDENT-SET.

Same as above, but flip IS and VC


e.g. SET-COVER

Given integers *k* and *n*, and collection *S* of subsets of  $\{1, \dots, n\}$ , are there  $\leq k$  of these subsets whose union equals  $\{1, \dots, n\}$ ?

Claim: **VERTEX-COVER  $\leq_P$  SET-COVER**

**Reduction**: given  $(G, k)$  instance of VERTEX-COVER, generate an instance  $(n, k', S)$  of SET-COVER.

Proof. For each node *v* in *G*, construct a set *S<sub>v</sub>* containing all its outgoing edges. (Number each edge)

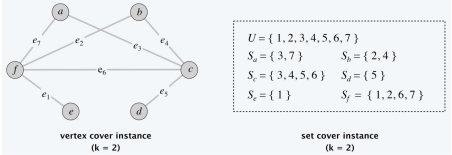

e.g. 3-SAT

- **SAT**: given a CNF formula  $\Phi$ , does it have a satisfying truth assignment?
  - literal: a boolean variable or its negation *x*,  $\bar{x}$
  - clause: a disjunction (OR) of literals
  - conjunctive normal form (CNF): formula  $\Phi$  that is a conjunction (AND) or clauses
- **3-SAT**  $\rightarrow$  SAT where each clause contains exactly 3 literals
- **3-SAT  $\leq_P$  INDEPENDENT-SET**
  - **Reduction**: Construct an instance  $(G, k)$  of INDEP-SET s.t. *G* has an independent set of size *k*  $\iff \Phi$  is satisfiable

helpful approximations

stirling's approximation:  $T(n) = \sum_{i=0}^n \log(n-i) = \log \prod_{i=0}^n (n-i) = \Theta(n \log n)$

harmonic number,  $H_n = \sum_{k=1}^n \frac{1}{k} = \Theta(\lg n)$

basel problem:  $\sum_{n=1}^N \frac{1}{n^2} \leq 2 - \frac{1}{N} \xrightarrow{N \rightarrow \infty} 2$

because  $\sum_{n=1}^N \frac{1}{N^2} \leq 1 + \sum_{x=2}^{\log_3 n} \frac{1}{(x-1)x} = 1 + \sum_{n=2}^N (\frac{1}{n-1} - \frac{1}{n}) = 1 + 1 - \frac{1}{N} = 2 - \frac{1}{N}$

number of primes in range  $\{1, \dots, K\}$  is  $> \frac{K}{\ln K}$

asymptotic bounds

$1 < \log n < \sqrt{n} < n < n \log n < n^2 < n^3 < 2^n < 2^{2n}$

$\log_a n < n^a < a^n < n! < n^n$

for any  $a, b > 0$ ,  $\log_a n < n^b$

multiple parameters

for two functions  $f(m, n)$  and  $g(m, n)$ , we say that  $f(m, n) = O(g(m, n))$  if there exists constants  $c, m_0, n_0$  such that  $0 \leq f(m, n) \leq c \cdot g(m, n)$  for all  $m \geq m_0$  or  $n \geq n_0$ .

set notation

- $O(g(n)) = \{f(n) : \exists c, n_0 > 0 \mid \forall n \geq n_0, 0 \leq f(n) \leq cg(n)\}$
- $\Omega(g(n)) = \{f(n) : \exists c, n_0 > 0 \mid \forall n \geq n_0, 0 \leq cg(n) \leq f(n)\}$
- $\Theta(g(n)) = \{f(n) : \exists c_1, c_2, n_0 > 0 \mid \forall n \geq n_0, 0 \leq c_1 \cdot g(n) \leq f(n) \leq c_2 \cdot g(n)\} = O(g(n)) \cap \Omega(g(n))$
- $o(g(n)) = \{f(n) : \forall c > 0, \exists n_0 > 0 \mid \forall n \geq n_0, 0 \leq f(n) < cg(n)\}$
- $\omega(g(n)) = \{f(n) : \forall c > 0, \exists n_0 > 0 \mid \forall n \geq n_0, 0 \leq cg(n) < f(n)\}$

example proofs

*Proof.* that  $2n^2 = O(n^3)$   
let  $f(n) = 2n^2$ . then  $f(n) = 2n^2 \leq n^3$  when  $n \geq 2$ .  
set  $c = 1$  and  $n_0 = 2$ .  
we have  $f(n) = 2n^2 \leq c \cdot n^3$  for  $n \geq n_0$ .

*Proof.*  $n = o(n^2)$   
For any  $c > 0$ , use  $n_0 = 2/c$ .

*Proof.*  $n^2 - n = \omega(n)$   
For any  $c > 0$ , use  $n_0 = 2(c + 1)$ .

*Example.* let  $f(n) = n$  and  $g(n) = n^{1+\sin(n)}$ .  
Because of the oscillating behaviour of the sine function, there is no  $n_0$  for which  $f$  dominates  $g$  or vice versa.  
Hence, we cannot compare  $f$  and  $g$  using asymptotic notation.

*Example.* let  $f(n) = n$  and  $g(n) = n(2 + \sin(n))$ .  
Since  $\frac{1}{3}g(n) \leq f(n) \leq g(n)$  for all  $n \geq 0$ , then  $f(n) = \Theta(g(n))$ . (note that limit rules will not work here)

mentioned algorithms

- ch.3 - **Misra Gries** - space-efficient computation of the majority bit in array  $A$
- ch.3 - **Euclidean** - efficient computation of GCD of two integers
- ch.3 - **Tower of Hanoi** -  $T(n) = 2^n - 1$ 
  - move the top  $n - 1$  discs from the first to the second peg using the third as temporary storage.
  - move the biggest disc directly to the empty third peg.
  - move the  $n - 1$  discs from the second peg to the third using the first peg for temporary storage.
- ch.3 - **MergeSort** -  $T(n) = T(\lfloor n/2 \rfloor) + T(\lceil n/2 \rceil) + \Theta(n)$
- ch.3 - **Karatsuba Multiplication** - multiply two  $n$ -digit numbers  $x$  and  $y$  in  $O(n^{\log_2 3})$ 
  - worst-case runtime:  $T(n) = 3T(\lceil n/2 \rceil) + \Theta(n)$

uncommon notations

- $\perp$  - false