

ContinualSkillBench: Can LLM Agents Truly Evolve Their Capabilities?*

Tianyi Guan^{1†} Yiding Wang^{1†} Haotong Yang¹ Siyuan Cao¹ Shirui Liu¹ Yi Hu¹
Jiaqi Li^{2‡} Muhan Zhang^{1, 2‡}

¹Institute for Artificial Intelligence, Peking University

²Beijing Institute for General Artificial Intelligence

Abstract

Modern agent frameworks equip large language models with external skill libraries to solve complex tasks. However, it remains unclear whether these systems can effectively evolve their skills and whether the resulting skills improve task-solving capabilities. To bridge this gap, we introduce **CONTINUALSKILLBENCH**, a dynamic evaluation framework for in-context continual skill learning. It covers five representative domains, each containing 100 interconnected subtasks ordered by increasing difficulty and opportunities for cross-task skill reuse. Our experiments show that sequential execution generally improves performance, but the gains vary substantially across models and domains. Moreover, in-context learning performs comparably to explicit skill maintenance on average, suggesting that much of the improvement arises from adaptation to prior context and feedback rather than reusable skill abstraction alone. Explicit skills nevertheless provide selective benefits for tasks requiring reusable procedures or precise outputs. We further find that less capable models tend to accumulate larger, more fragmented collections of task-specific skills. These findings show that current in-context skill evolution mechanisms can support continual adaptation, but still struggle to consistently consolidate experience into robust and transferable skills.

1 Introduction

Large language models (LLMs) are rapidly evolving from simple question-answering systems into backbones of agents capable of solving complex, real-world problems. Since real-world tasks are rich in requirements and may shift from pre-trained dynamics, relying solely on their pre-trained weights is often insufficient. To compen-

sate for the lack of domain-specific knowledge or processing logic, and fundamentally enhance their task-solving performance during deployment, “agent skills” (Schick et al., 2023; Shen et al., 2023) have been introduced. These skills are typically organized into structured documents and have already been widely adopted by mainstream agent platforms such as Claude Code (Anthropic, 2025) and Codex (OpenAI, 2025).

Recent work has shown that given well-written skills from human experts, agents perform significantly better on corresponding tasks (Li et al., 2026). However, it is fundamentally difficult and expensive to manually build a comprehensive skill library for agents. In more realistic settings, where users only provide task descriptions and feedback through a task sequence, a critical question is whether agents can autonomously synthesize and evolve their own skills from these interactions. Although some works explore this direction (Asawa et al., 2026; Zhong et al., 2026), we still lack a systematic evaluation of their capability limits.

We study this setting through **CONTINUALSKILLBENCH**, a comprehensive evaluation framework for agent skill evolution. Unlike previous evaluations that test agents on isolated tasks with fixed skill documents, **CONTINUALSKILLBENCH** is explicitly designed to assess an agent’s capacity for continuous feedback learning and to evaluate whether the dynamically evolved skills lead to capability expansion. Specifically, our benchmark includes five representative domains (e.g., Law, Healthcare, and Finance). Within each domain, we curate 100 interconnected subtasks anchored to three core skills. Rather than presenting these tasks at random, we strategically order them by varying levels of difficulty and underlying skill dependencies. This logical progression creates an environment in which downstream objectives implicitly rely on the skills practiced in earlier steps, thereby providing a realistic and expansive space

*Source code: <https://github.com/gtyynn060110-hash/continual-skill-bench-final>.

[†] Equal Contribution.

[‡] Corresponding Authors.

for agents to engage in continual learning.

We evaluate multiple foundation models with corresponding harnesses, comparing sequential agents, which continuously update their skills using task feedback, against independent baselines that execute every task from scratch. Our results reveal several key insights. 1) sequential execution improves normalized reward in 14 of 15 model-domain combinations, yielding an aggregate relative gain of 16.9%. However, these gains vary substantially across models and domains. 2) over the three domains included in our ablation, in-context learning performs comparably to explicit skill maintenance on average (0.605 versus 0.602 normalized reward), suggesting that much of the improvement can arise from adaptation to prior context and feedback rather than reusable skill abstraction alone. Explicit skills nevertheless provide selective benefits for tasks requiring reusable procedures or precise outputs. 3) models differ substantially in how they maintain their skill repositories. GPT-4o accumulates 384 skills across the five domains, compared with 205 for GPT-5.3-Codex, but these skills are less frequently reused and receive lower quality scores. These results show that current agents can adapt through continual interaction, but still struggle to consistently consolidate experience into robust and transferable skills.

Our main contributions are as follows:

- We introduce **CONTINUALSKILLBENCH**, a dynamic evaluation framework designed to assess the continual skill evolution and in-context learning capabilities of LLM agents.
- We construct ordered task sequences across five domains, with each domain containing 100 interconnected subtasks organized by increasing difficulty and opportunities for cross-task skill reuse.
- We benchmark multiple model-harness configurations and compare explicit skill maintenance with independent and in-context learning baselines, revealing the benefits and limitations of current sequential agent frameworks.

2 Related Work

In-Context Skill Evolution for Agents. To execute complex, domain-specific tasks, LLM agents increasingly rely on external tools or structured skills (Schick et al., 2023; Shen et al., 2023; Xu and Yan, 2026). However, most current approaches

assume a static skill library, severely limiting adaptability in dynamic environments. Furthermore, adapting models to new sequential tasks via standard parametric updates (e.g., fine-tuning) typically leads to catastrophic forgetting (Kirkpatrick et al., 2017). To mitigate this, recent research has explored *in-context* continual learning (Wu et al., 2024; Raparthy et al., 2023). By leveraging extended context windows, agents can achieve lifelong learning—dynamically updating and retrieving a growing library of skills over sequential tasks—without fine-tuning their parameters.

Benchmarks for Agent Skills and Continual Learning.

Most general-purpose agent benchmarks evaluate task completion under a fixed set of tools, instructions, or skills (Mialon et al., 2023; Zhang et al., 2026; Ye et al., 2026). SkillsBench evaluates the utility of externally provided skills through paired no-skill and curated-skill conditions, but does not study how a skill library evolves over a sequence of interactions (Li et al., 2026). Recent benchmarks have begun to evaluate skill learning from experience. SkillLearnBench (Zhong et al., 2026) studies several methods for generating and refining skills from seed instances, and evaluates the resulting skills through skill quality, execution behavior, and performance on additional instances of the same task. CL-Bench (Dou et al., 2026) takes a broader view of online learning by constructing stateful task sequences with shared latent structure and comparing different in-context and memory-based agent architectures. SkillCraft (Chen et al., 2026) instead focuses on the acquisition and reuse of executable tool compositions across tasks. CONTINUALSKILLBENCH complements these efforts by studying skill evolution over long, heterogeneous task streams within broad domains. Each stream contains tasks from multiple sources and evaluation formats, connected by recurring core skills rather than a single repeated task or a fixed execution workflow. This setting allows us to examine whether experience acquired from one task can be consolidated into structured skills and reused on different downstream tasks, as well as how this ability varies across domains and models.

3 CONTINUALSKILLBENCH

To address the gap, we introduce CONTINUALSKILLBENCH to evaluate agents’ continual skill learning capability under sequential task interac-

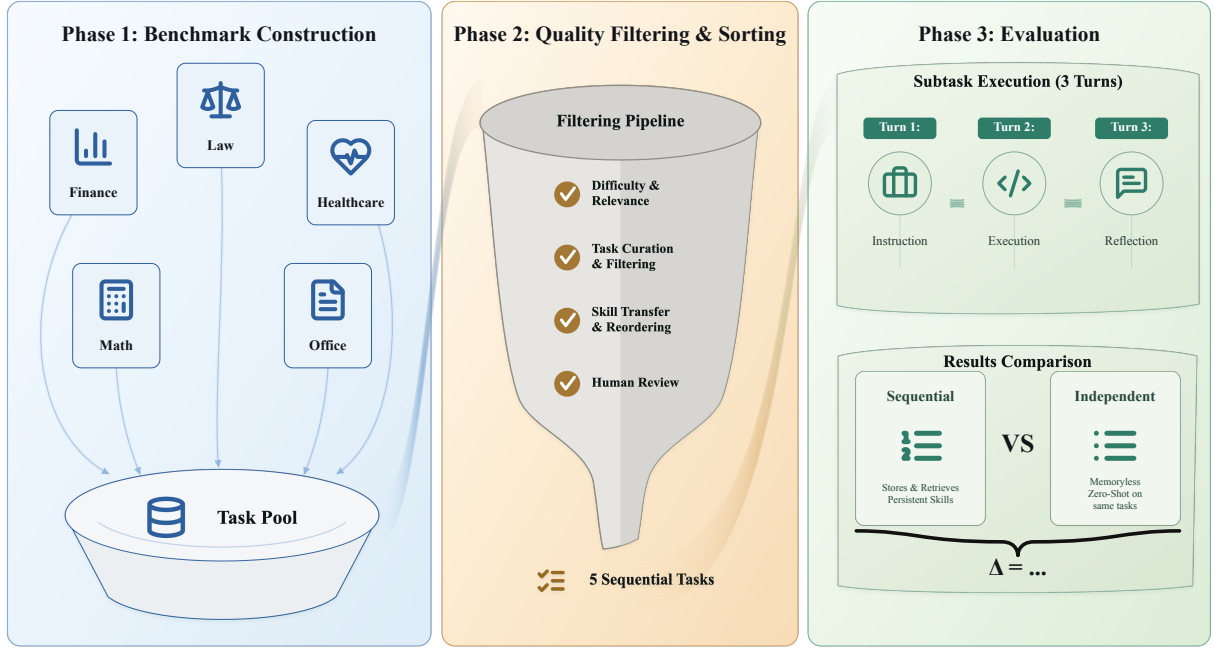


Figure 1: Overview of the CONTINUALSKILLBENCH pipeline. Phase 1 collects approximately 30,000 tasks from five domains. Phase 2 uses LLM-assisted filtering, skill-dependency analysis, task ordering, and human review to construct five sequential task streams. Phase 3 evaluates agents through instruction, execution, and reflection, comparing Sequential and Independent execution with their performance difference reported as Δ .

tion. The benchmark contains five domain-specific task streams, each consisting of 100 subtasks ordered by difficulty and potential for skill reuse. After completing each subtask, the agent receives feedback and may create or modify skills from its skill repository; the updated repository is then available for subsequent tasks. This setup allows us to examine whether experience from earlier tasks can be consolidated into reusable skills and improve later task performance. Figure 1 summarizes the benchmark construction, task curation, and evaluation pipeline.

3.1 Benchmark Construction

Domain Selection We select five representative domains in which agents may provide practical value: Healthcare, Law, Mathematics, Finance, and Office. Rather than relying on synthetic environments, these domains span consequential real-world applications and broadly applicable reasoning settings that often require complex, multi-step reasoning or nuanced human evaluation. Their diversity and complexity make them well suited for assessing whether agents can organize accumulated knowledge, refine their problem-solving strategies, and reuse acquired skills over time.

Source Benchmark Selection and Pool Construction To accurately reflect the progressive nature of continual skill learning, we establish a difficulty

and capability gradient by constructing our task pool from three distinct tiers of benchmarks (Figure 2). For the foundational layers of our skill chains, we select classic yet challenging datasets (e.g., *OlympiadBench* (He et al., 2024), *LawBench* (Fei et al., 2023), *TAT-QA* (Zhu et al., 2021)) to test essential knowledge processing skills. We then construct intermediate and advanced stages using open-ended agent datasets (e.g., *GAIA* (Mialon et al., 2023), *ClawBench* (Zhang et al., 2026), *MedAgentsBench* (Tang et al., 2025), *MathCoder* (Wang et al., 2024)) that demand multi-step reasoning, tool use, and environmental interaction. Finally, for the most challenging stage (e.g., high-level strategic decision-making), we incorporate complex human-evaluated benchmarks like *One-MillionBench* (OMBench) (Yang et al., 2026). Combining these diverse sources ensures our task pool possesses the hierarchical complexity necessary to evaluate an agent’s continual self-evolution.

3.2 Filtering and Ordering via Skill Chains

The construction of task sequences in CONTINUALSKILLBENCH is based on a working assumption: *complex tasks within the same domain often rely on a shared set of foundational skills*. Rather than randomly grouping isolated subtasks from the same domain, we identify the core skills required by each task and organize the tasks according to their

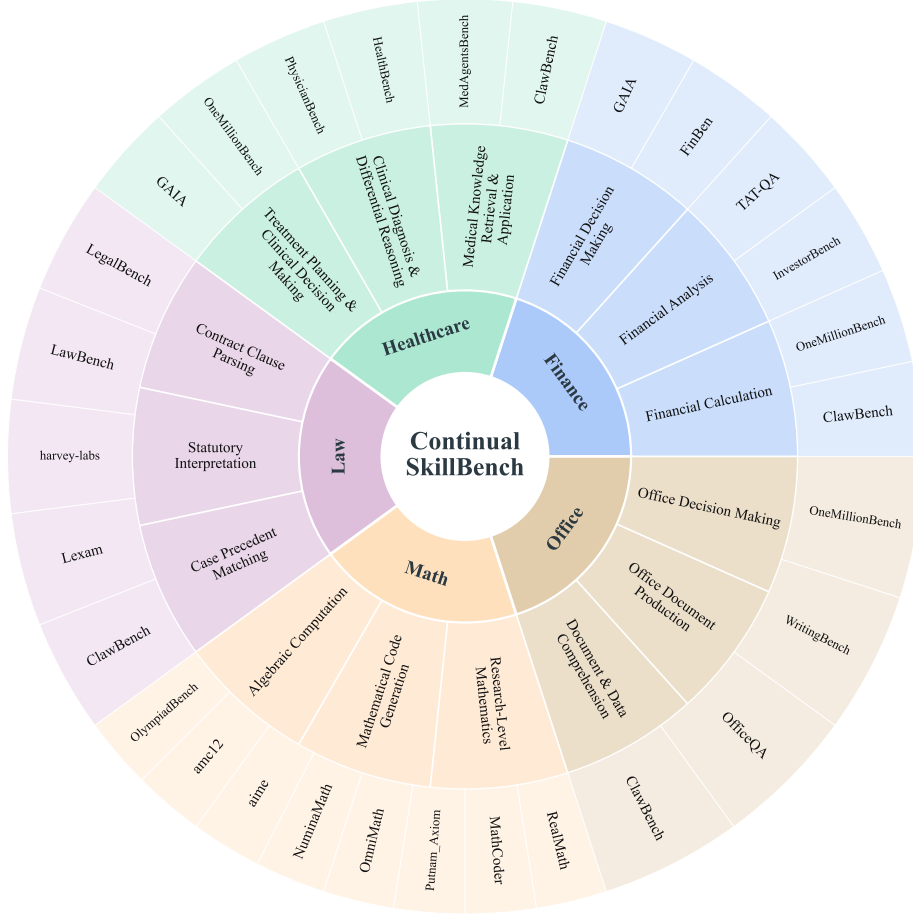


Figure 2: Taxonomy of CONTINUALSKILLBENCH. The inner ring shows the five domains, the middle summarizes three macro capability tracks within each domain, and the outer lists the source datasets and benchmarks.

potential skill-transfer dependencies. This creates opportunities for skills acquired or refined in one task to be reused across different tasks later in the sequence.

To support progressive learning, we further arrange tasks from relatively simple to more challenging ones. For example, the **Finance** sequence progresses from basic *financial calculation* to *market analysis* and then to *strategic decision-making*. Similarly, **Mathematics** moves from *basic algebraic computation* to *mathematical code generation* and finally to *research-level problem solving*. The other domains follow the same general progression: from *medical entity extraction* to *treatment planning* in **Healthcare**, from *statute retrieval* to *jurisprudential reasoning* in **Law**, and from *basic email parsing* to *cross-application workflow automation* in **Office**.

We process the data in three stages:

1. **Skill Labeling and Filtering:** We prompt an LLM to identify the skills required by each raw task, filter tasks by their relevance to the

target domain skills, and assign an initial difficulty rating.

2. **Pairwise Dependency Evaluation and Graph-based Ordering:** We sample task pairs from the filtered candidates and ask an LLM to assess the potential direction of skill transfer between them. The resulting judgments are converted into a directed dependency graph. We then order the graph under a difficulty constraint, placing easier tasks first and prioritizing tasks that may support more subsequent tasks.
3. **Human Review:** We manually review the resulting trajectories for task quality, difficulty progression, and the plausibility of the proposed skill-transfer relationships.

Further details of the pairwise evaluation and graph-based ordering algorithm are provided in Appendix B.

3.3 Structural Validation of Skill Continuity

To verify that the resulting task sequences provide meaningful opportunities for cross-task transfer, we conduct a post-hoc structural analysis of the core skills required by each task. We annotate tasks independently of their sequence positions and regard two core skills as semantic counterparts when the cosine similarity between their textual representations is at least 0.85.

Macro-averaged across the five domains, **69.5%** of eligible tasks reuse at least one core skill encountered earlier in the sequence. Moreover, averaged over target tasks, **35.5%** of their core-skill requirements have a semantic counterpart in the preceding history. These results demonstrate that CONTINUALSKILLBENCH exhibits substantial skill recurrence and offers frequent opportunities for cross-task transfer, rather than comprising isolated tasks.

We further compare the curated sequences with random task permutations using history windows of 1, 5, and 10 preceding tasks. Our curated order yields higher core-skill coverage across all five domains and all three local history windows, indicating that the ordered task sequences exhibit a clear local skill-dependency structure, with nearby tasks more likely to require overlapping or semantically related core skills. Full definitions, permutation-test results, and domain-level analyses are provided in Appendix C.

3.4 Evaluation Metrics

Because the benchmark includes tasks with different output formats and evaluation requirements, we use four types of evaluators:

- **Exact Match and F1:** Exact match is used for tasks with a short, deterministic answer. For longer responses, token-level F1 measures partial overlap with the reference answer.
- **Numeric:** Numerical answers are extracted and compared with the reference value under a task-specific tolerance, typically $\epsilon \leq 10^{-4}$.
- **Rubric Judge:** Open-ended responses are evaluated by an LLM judge using predefined rubric criteria. Task reward is the weighted aggregate of the criterion-level scores.
- **Programmatic:** Tasks involving tool use or artifact creation are evaluated with executable tests that inspect the resulting files, outputs, or environment states. Where available, we

adapt the official evaluators from the source benchmarks, including *GAIA* and *ClawBench*.

3.5 Underlying Framework

We build CONTINUALSKILLBENCH on the Harbor infrastructure (Harbor Framework Team, 2026; Merrill et al., 2026) and extend it with two sequential agent harnesses based on Codex CLI (OpenAI, 2025) and Claude Code (Anthropic, 2025). Each subtask follows a three-turn protocol: the agent first receives the task and its current skill repository, then executes the task, and finally reflects on evaluator feedback. During reflection, it may create or revise skills using the provided **Create Skill** and **Modify Skill** meta-skills. Any updates become available from the next subtask onward. The complete interaction protocol and prompts are provided in Appendix D.

4 Experiments

4.1 Environmental Setup

4.1.1 Evaluated Models

To assess the state-of-the-art agentic capabilities under our sequential setting, we evaluate three representative foundation models on CONTINUALSKILLBENCH: GPT-4o (OpenAI et al., 2024), GPT-5.3-Codex (OpenAI, 2026), and Claude 4.7 Opus (Anthropic, 2026). The models are evaluated using the sequential agent harnesses described in Section 3.5, with the same task order and evaluation procedure within each domain.

4.1.2 Evaluation Settings

We consider the following two primary settings:

- **Independent Execution (Ind., Baseline):** The agent solves each task independently. Its interaction history and skill repository are reset before every task.
- **Sequential Execution (Seq.):** The agent processes the 100 subtasks sequentially, actively retaining and updating its skill repository throughout the entire trajectory (as described in Section 3.5).

The difference between Sequential and Independent execution measures the combined effect of retained context, task feedback, and explicit skill maintenance. To separate explicit skill maintenance from general adaptation through context, we introduce a pure in-context learning baseline in Section 4.3.

Table 1: Performance of Independent (Ind.) and Sequential (Seq.) execution across models and domains. Parentheses report $\Delta = \text{Seq.} - \text{Ind.}$, with **green** denoting improvement and **red** denoting degradation. Raw reward includes all tasks, whereas normalized reward is computed over tasks with valid outputs under both settings.

(a) GPT-4o

Domain	Setting	Subtask Rewards					Reward	
		EM	F1	Num.	Prog.	Rubric	Raw	Norm.
Law	Ind.	0.500	-	-	0.300	0.111	0.286	0.325
	Seq.	0.550 (+0.050)	-	-	0.300 (0.000)	0.060 (-0.051)	0.280 (-0.006)	0.395 (+0.070)
Finance	Ind.	0.182	0.251	0.333	0.077	0.088	0.135	0.180
	Seq.	0.182 (0.000)	0.346 (+0.095)	0.417 (+0.084)	0.308 (+0.231)	0.094 (+0.006)	0.185 (+0.050)	0.262 (+0.082)
Healthcare	Ind.	0.107	-	-	0.500	0.363	0.297	0.387
	Seq.	0.429 (+0.322)	-	-	0.500 (0.000)	0.417 (+0.054)	0.424 (+0.127)	0.413 (+0.026)
Office	Ind.	0.000	-	0.047	0.650	0.431	0.231	0.260
	Seq.	0.000 (0.000)	-	0.256 (+0.209)	0.650 (0.000)	0.443 (+0.012)	0.308 (+0.077)	0.380 (+0.120)
Math	Ind.	0.103	-	0.208	0.000	0.040	0.100	0.110
	Seq.	0.154 (+0.051)	-	0.125 (-0.083)	0.583 (+0.583)	0.160 (+0.120)	0.200 (+0.100)	0.198 (+0.088)

(b) GPT-5.3-Codex

Domain	Setting	Subtask Rewards					Reward	
		EM	F1	Num.	Prog.	Rubric	Raw	Norm.
Law	Ind.	0.875	-	-	0.800	0.309	0.585	0.585
	Seq.	0.975 (+0.100)	-	-	0.800 (0.000)	0.319 (+0.010)	0.629 (+0.044)	0.629 (+0.044)
Finance	Ind.	0.364	0.309	0.417	0.800	0.404	0.435	0.432
	Seq.	0.455 (+0.091)	0.506 (+0.197)	0.833 (+0.416)	0.900 (+0.100)	0.442 (+0.038)	0.495 (+0.060)	0.556 (+0.124)
Healthcare	Ind.	0.321	-	-	0.500	0.396	0.379	0.380
	Seq.	0.857 (+0.536)	-	-	0.500 (0.000)	0.521 (+0.125)	0.614 (+0.235)	0.620 (+0.240)
Office	Ind.	1.000	-	0.860	1.000	0.367	0.718	0.731
	Seq.	0.500 (-0.500)	-	0.881 (+0.021)	1.000 (0.000)	0.408 (+0.041)	0.723 (+0.005)	0.738 (+0.007)
Math	Ind.	0.538	-	0.708	0.667	0.840	0.670	0.670
	Seq.	0.590 (+0.052)	-	0.875 (+0.167)	0.750 (+0.083)	0.860 (+0.020)	0.745 (+0.075)	0.745 (+0.075)

(c) Opus 4.7

Domain	Setting	Subtask Rewards					Reward	
		EM	F1	Num.	Prog.	Rubric	Raw	Norm.
Law	Ind.	0.850	-	-	0.800	0.269	0.556	0.573
	Seq.	0.950 (+0.100)	-	-	0.800 (0.000)	0.307 (+0.038)	0.595 (+0.039)	0.633 (+0.060)
Finance	Ind.	0.364	0.381	0.833	0.769	0.259	0.414	0.438
	Seq.	0.364 (0.000)	0.476 (+0.095)	0.750 (-0.083)	0.769 (0.000)	0.302 (+0.043)	0.442 (+0.028)	0.460 (+0.022)
Healthcare	Ind.	0.750	-	-	0.500	0.282	0.422	0.481
	Seq.	0.929 (+0.179)	-	-	0.500 (0.000)	0.516 (+0.234)	0.631 (+0.209)	0.662 (+0.181)
Office	Ind.	1.000	-	0.884	1.000	0.305	0.707	0.707
	Seq.	1.000 (0.000)	-	0.884 (0.000)	1.000 (0.000)	0.405 (+0.100)	0.742 (+0.035)	0.742 (+0.035)
Math	Ind.	0.641	-	0.917	0.750	0.400	0.660	0.660
	Seq.	0.744 (+0.103)	-	0.917 (0.000)	0.750 (0.000)	0.208 (-0.192)	0.652 (-0.008)	0.652 (-0.008)

Aggregate Metrics. To comprehensively evaluate the agents’ performance, we define two distinct reward metrics. The **raw reward** (R_{raw}) is calculated as the average score across the entire evaluation set of 100 tasks. To ensure a relatively fair comparison and reduce biases introduced by formatting or parsing failures, we further introduce a **normalized reward** ($\tilde{R}_{\text{norm}}$). This metric is computed exclusively on the intersection subset of tasks where both the Sequential and Independent settings successfully generate valid output files.

Building upon these metrics, we explicitly quantify the benefits of our continual skill learning framework by measuring the performance gains relative to the baseline. The absolute gains, denoted as Δ_{raw} and Δ_{norm} , are formulated as follows:

$$\begin{aligned}\Delta_{\text{raw}} &= R_{\text{raw}}^{\text{seq}} - R_{\text{raw}}^{\text{ind}} \\ \Delta_{\text{norm}} &= \tilde{R}_{\text{norm}}^{\text{seq}} - \tilde{R}_{\text{norm}}^{\text{ind}}\end{aligned}$$

where the superscripts **seq** and **ind** indicate the rewards achieved under our sequential pipeline and the independent execution baseline, respectively.

4.2 Main Results

Table 1 presents the main evaluation results. We organize the analysis around four observations.

Sequential execution generally improves task performance. Sequential execution increases raw reward in 13 of the 15 model–domain combinations and normalized reward in 14 of 15. Macro-averaged across all combinations, the absolute improvements are +0.071 in raw reward and +0.078 in normalized reward. Relative to the corresponding aggregate Independent baselines, these changes represent improvements of 16.2% and 16.9%, respectively. Thus, retaining experience across tasks is generally beneficial, although the improvement is not universal.

The magnitude of improvement varies across models. GPT-5.3-Codex obtains the largest average normalized improvement (+0.098), followed by GPT-4o (+0.077) and Opus 4.7 (+0.058). This ordering does not directly follow Independent performance: although Opus 4.7 has the strongest average Independent baseline, it does not obtain the largest sequential gain. Conversely, GPT-4o achieves substantial relative improvements from a lower baseline. These results suggest that the ability to benefit from prior experience is model-dependent but is not determined solely by baseline task-solving capability.

Sequential benefits are strongly domain-dependent. Healthcare exhibits the largest average normalized improvement across models (+0.149), driven primarily by gains from GPT-5.3-Codex and Opus 4.7. The average gains in Finance, Law, Office, and Mathematics are +0.076, +0.058, +0.054, and +0.052, respectively. The only decrease in normalized reward occurs for Opus 4.7 on Mathematics (−0.008).

Improvements also depend on the evaluator type. Structured tasks often benefit from sequential execution. For example, GPT-5.3-Codex improves by +0.416 on Numeric tasks and +0.091 on Exact Match tasks in Finance, compared with +0.038 on Rubric-judged tasks. However, this pattern is not universal: Opus 4.7 obtains a substantial +0.234 Rubric improvement in Healthcare, while its Mathematics Rubric score decreases by −0.192. These differences motivate a closer examination of whether the gains arise from explicit skill maintenance or from broader adaptation to previous context and feedback.

4.3 Explicit Skill Maintenance vs. Pure In-Context Learning

Sequential–Independent comparison does not isolate the contribution of the explicit skill repository, since Sequential execution also retains prior context and feedback. We therefore introduce a pure in-context learning (ICL) condition that follows the same sequence and receives the same feedback, but cannot create or modify skills. We evaluate this condition with GPT-5.3-Codex on Law, Finance, and Healthcare.

Across these domains, the average normalized rewards of Independent, ICL, and skill-maintaining Sequential execution are 0.466, 0.605, and 0.602, respectively. Sequential slightly outperforms ICL in Law and Finance but trails it in Healthcare, showing that explicit skill maintenance provides no consistent aggregate advantage over pure ICL.

The two conditions nevertheless exhibit different strengths. Explicit skills improve Exact Match performance in Law and Finance and increase Programmatic performance in Healthcare from 0.250 to 0.500, whereas ICL obtains higher Rubric scores in all three domains. These results suggest that much of the Sequential–Independent gain comes from retained context and feedback. Explicit skills can stabilize reusable procedures under rigid output or execution requirements, but may over-specialize

Table 2: GPT-5.3-Codex performance under Independent, pure ICL, and skill-maintaining Sequential execution.

Domain	Setting	EM	F1	Num.	Prog.	Rubric	Raw	Norm.
Law	Ind.	0.875	—	—	0.800	0.309	0.585	0.585
	ICL	0.900	—	—	0.900	0.330	0.615	0.617
	Seq.	0.975	—	—	0.800	0.319	0.629	0.629
Finance	Ind.	0.364	0.309	0.417	0.800	0.404	0.435	0.432
	ICL	0.364	0.460	0.833	0.900	0.444	0.482	0.542
	Seq.	0.455	0.506	0.833	0.900	0.442	0.495	0.556
Healthcare	Ind.	0.321	—	—	0.500	0.396	0.379	0.380
	ICL	0.857	—	—	0.250	0.596	0.655	0.655
	Seq.	0.857	—	—	0.500	0.521	0.614	0.620

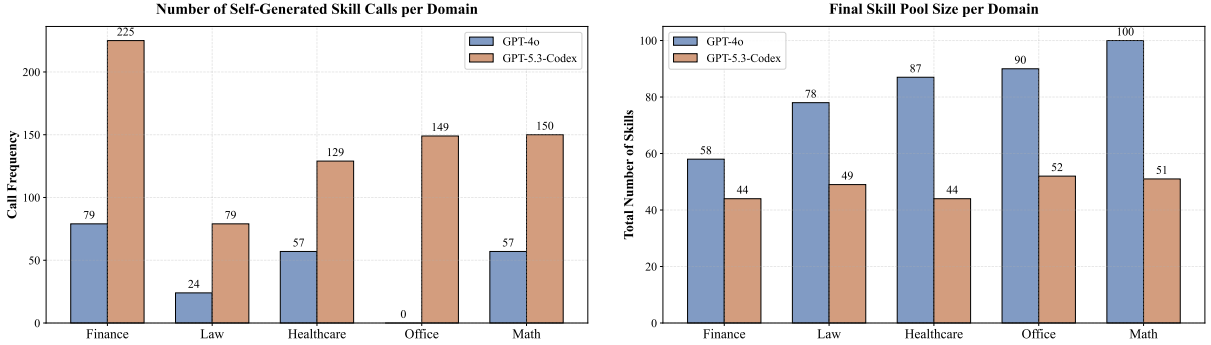


Figure 3: Skill-library behavior of GPT-4o and GPT-5.3-Codex across five domains. The left panel shows how frequently generated skills are invoked in later tasks, and the right panel shows the final skill repository size. These statistics describe skill maintenance but do not directly establish skill utility.

to earlier evaluation criteria on open-ended tasks.

4.4 Skill Library Dynamics

Performance gains alone do not reveal how agents maintain their skill repositories. We therefore examine two complementary behavioral statistics: the frequency with which generated skills are invoked in later tasks and the size of the resulting skill repository. Figure 3 reports these statistics for GPT-4o and GPT-5.3-Codex across the five domains.

Skill fragmentation hinders long-term adaptation in weaker models. Figure 3 reveals a clear contrast in how the two models maintain their skill repositories. GPT-5.3-Codex constructs a relatively compact library while invoking its skills more frequently in subsequent tasks. This pattern suggests that it can consolidate multiple task experiences into reusable procedures and retrieve them when related tasks reappear. GPT-4o exhibits the opposite behavior: it accumulates a larger skill pool but invokes the resulting skills less frequently.

This combination of rapid library growth and limited reuse indicates that GPT-4o tends to preserve fragmented, task-specific skills rather than

merging related experience into more general procedures. As the trajectory progresses, these narrowly scoped skills enlarge the repository without providing proportional downstream utility, increasing the burden of selecting and maintaining useful skills. Additional analyses of generated-skill validity and content quality are provided in Appendix G.

5 Conclusion

We introduced CONTINUALSkillBENCH to evaluate continual skill learning across long task sequences in five domains. Sequential execution generally improves performance, but the gains vary across models and domains. In-context learning performs comparably to explicit skill maintenance on average, suggesting that much of the improvement comes from adaptation to prior context and feedback. Explicit skills still provide selective benefits for tasks requiring reusable procedures or precise outputs. Moreover, weaker model tends to build larger and more fragmented skill repositories. Overall, current agents can benefit from continual interaction, but consistently consolidating experience into robust and transferable skills remains an open challenge.

Limitations

Our study has several limitations. First, while CONTINUALSKILLBENCH covers five core domains, the tasks within each domain are still curated from a fixed set of sources. Real deployments are more diverse and less controlled: agents may see rare edge cases, shifted data distributions, and instructions that differ substantially from the benchmark format. These long-tail settings are not fully covered by our current evaluation.

Second, due to the high time and API cost of sequential agent evaluation, we evaluate only a limited set of representative models and harnesses. We do not exhaustively cover additional Claude, GPT, or Gemini variants, nor do we adapt the benchmark to other agent environments such as Cursor or Google CLI. Since different models and agent frameworks may handle memory, skill retrieval, and execution control differently, future work should broaden both model and infrastructure coverage.

References

- Anthropic. 2025. Claude code: An agentic coding tool. <https://github.com/anthropics/claude-code>.
- Anthropic. 2026. Claude 4.7 opus. <https://www.anthropic.com/news/claude-opus-4-7>.
- Rahul K. Arora, Jason Wei, Rebecca Soskin Hicks, Preston Bowman, Joaquin Quiñero-Candela, Foivos Tsimpourlas, Michael Sharman, Meghan Shah, Andrea Vallone, Alex Beutel, Johannes Heidecke, and Karan Singhal. 2025. *Healthbench: Evaluating large language models towards improved human health*. *Preprint*, arXiv:2505.08775.
- Parth Asawa, Chris Glaze, Gabe Orlanski, Ramya Ramakrishnan, Benji Xu, Asim Biswal, Vincent Sunn Chen, Frederic Sala, Matei Zaharia, and Joseph E. Gonzalez. 2026. Continual learning bench.
- Shiqi Chen, Jingze Gai, Ruochen Zhou, Jinghan Zhang, Tongyao Zhu, Junlong Li, Kangrui Wang, Zihan Wang, Zhengyu Chen, Klara Kaleb, and 1 others. 2026. Skillcraft: Can llm agents learn to use tools skillfully? *arXiv preprint arXiv:2603.00718*.
- Shihan Dou, Ming Zhang, Zhangyue Yin, Chenhao Huang, Yujiong Shen, Junzhe Wang, Jiayi Chen, Yuchen Ni, Junjie Ye, Cheng Zhang, and 1 others. 2026. Cl-bench: A benchmark for context learning. *arXiv preprint arXiv:2602.03587*.
- edev2000. 2025. *amc12-full dataset*. Hugging Face. Accessed: 2026-05-26.
- Emergent Mind. 2026. *Aime 2024 mathematical reasoning benchmark*. Emergent Mind Topics. Accessed: 2026-05-26.
- Yu Fan, Jingwei Ni, Jakob Merane, Yang Tian, Yoan Hermstrüwer, Yinya Huang, Mubashara Akhtar, Etienne Salimbeni, Florian Geering, Oliver Dreyer, Daniel Brunner, Markus Leippold, Mrinmaya Sachan, Alexander Stremitzer, Christoph Engel, Eliott Ash, and Joel Niklaus. 2026. *Lexam: Benchmarking legal reasoning on 340 law exams*. *Preprint*, arXiv:2505.12864.
- Zhiwei Fei, Xiaoyu Shen, Dawei Zhu, Fengzhe Zhou, Zhuo Han, Songyang Zhang, Kai Chen, Zongwen Shen, and Jidong Ge. 2023. *Lawbench: Benchmarking legal knowledge of large language models*. *Preprint*, arXiv:2309.16289.
- Bofei Gao, Feifan Song, Zhe Yang, Zefan Cai, Yibo Miao, Qingxiu Dong, Lei Li, Chenghao Ma, Liang Chen, Runxin Xu, Zhengyang Tang, Benyou Wang, Daoguang Zan, Shanghaoran Quan, Ge Zhang, Lei Sha, Yichang Zhang, Xuancheng Ren, Tianyu Liu, and Baobao Chang. 2024. *Omni-math: A universal olympiad level mathematic benchmark for large language models*. *Preprint*, arXiv:2410.07985.
- Niko Grupen, Gabe Pereyra, and Julio Pereyra. 2026. *Introducing harvey’s legal agent benchmark*. Harvey Blog. Accessed: 2026-05-26.
- Neel Guha, Julian Nyarko, Daniel E. Ho, Christopher Ré, Adam Chilton, Aditya Narayana, Alex Chohlas-Wood, Austin Peters, Brandon Waldon, Daniel N. Rockmore, Diego Zambrano, Dmitry Talisman, Enam Hoque, Faiz Surani, Frank Fagan, Galit Sarfaty, Gregory M. Dickinson, Haggai Porat, Jason Hegland, and 21 others. 2023. *Legalbench: A collaboratively built benchmark for measuring legal reasoning in large language models*. *Preprint*, arXiv:2308.11462.
- Aryan Gulati, Brando Miranda, Eric Chen, Emily Xia, Kai Fronsdal, Bruno Dumont, Elyas Obbad, and Sanmi Koyejo. 2025. *Putnam-axiom: A functional and static benchmark for measuring higher level mathematical reasoning in llms*. *Preprint*, arXiv:2508.08292.
- Harbor Framework Team. 2026. *Harbor: A framework for evaluating and optimizing agents and models in container environments*.
- Chaoqun He, Renjie Luo, Yuzhuo Bai, Shengding Hu, Zhen Leng Thai, Junhao Shen, Jinyi Hu, Xu Han, Yujie Huang, Yuxiang Zhang, Jie Liu, Lei Qi, Zhiyuan Liu, and Maosong Sun. 2024. *Olympiadbench: A challenging benchmark for promoting agi with olympiad-level bilingual multimodal scientific problems*. *Preprint*, arXiv:2402.14008.
- James Kirkpatrick, Razvan Pascanu, Neil Rabinowitz, Joel Veness, Guillaume Desjardins, Andrei A. Rusu,

- Kieran Milan, John Quan, Tiago Ramalho, Agnieszka Grabska-Barwinska, Demis Hassabis, Claudia Clopath, Dharshan Kumaran, and Raia Hadsell. 2017. **Overcoming catastrophic forgetting in neural networks**. *Proceedings of the National Academy of Sciences*, 114(13):3521–3526.
- Haohang Li, Yupeng Cao, Yangyang Yu, Shashidhar Reddy Javaji, Zhiyang Deng, Yueru He, Yuechen Jiang, Zining Zhu, Koduvayur Subbalakshmi, Guojun Xiong, Jimin Huang, Lingfei Qian, Xueqing Peng, Qianqian Xie, and Jordan W. Suchow. 2024. **Investorbench: A benchmark for financial decision-making tasks with llm-based agent**. *Preprint*, arXiv:2412.18174.
- Jia LI, Edward Beeching, Lewis Tunstall, Ben Lipkin, Roman Soletskyi, Shengyi Costa Huang, Kashif Rasul, Longhui Yu, Albert Jiang, Ziju Shen, Zihan Qin, Bin Dong, Li Zhou, Yann Fleureau, Guillaume Lample, and Stanislas Polu. 2024. **Numina-math**. [<https://github.com/project-numina/aimo-progress-prize>](https://github.com/project-numina/aimo-progress-prize/blob/main/report/numina_dataset.pdf).
- Xiangyi Li, Wenbo Chen, Yimin Liu, Shenghan Zheng, Xiaokun Chen, Yifeng He, Yubo Li, Bingran You, Haotian Shen, Jiankai Sun, Shuyi Wang, Binxu Li, Qunhong Zeng, Di Wang, Xuandong Zhao, Yuanli Wang, Roey Ben Chaim, Zonglin Di, Yipeng Gao, and 22 others. 2026. **Skillsbench: Benchmarking how well agent skills work across diverse tasks**. *Preprint*, arXiv:2602.12670.
- Ruoqi Liu, Imran Q. Mohiuddin, Austin J. Schoeffler, Kavita Renduchintala, Ashwin Nayak, Prasantha L. Vemu, Shivam C. Vedak, Kameron C. Black, John L. Havlik, Isaac Ogunmola, Stephen P. Ma, Roopa Dhatt, and Jonathan H. Chen. 2026. **Physicianbench: Evaluating llm agents in real-world ehr environments**. *Preprint*, arXiv:2605.02240.
- Mike A. Merrill, Alexander G. Shaw, Nicholas Carlini, Boxuan Li, Harsh Raj, Ivan Bercovich, Lin Shi, Jeong Yeon Shin, Thomas Walshe, E. Kelly Buchanan, Junhong Shen, Guanghao Ye, Haowei Lin, Jason Poulos, Maoyu Wang, Marianna Nezhurina, Jenna Jitsev, Di Lu, Orfeas Menis Mastromichalakis, and 66 others. 2026. **Terminal-bench: Benchmarking agents on hard, realistic tasks in command line interfaces**. *Preprint*, arXiv:2601.11868.
- Grégoire Mialon, Clémentine Fourrier, Craig Swift, Thomas Wolf, Yann LeCun, and Thomas Scialom. 2023. **Gaia: a benchmark for general ai assistants**. *Preprint*, arXiv:2311.12983.
- OpenAI, :, Aaron Hurst, Adam Lerer, Adam P. Goucher, Adam Perelman, Aditya Ramesh, Aidan Clark, AJ Ostrow, Akila Welihinda, Alan Hayes, Alec Radford, Aleksander Mądry, Alex Baker-Whitcomb, Alex Beutel, Alex Borzunov, Alex Carney, Alex Chow, Alex Kirillov, and 401 others. 2024. **Gpt-4o system card**. *Preprint*, arXiv:2410.21276.
- OpenAI. 2025. **Codex cli: Lightweight coding agent that runs in your terminal**. <https://github.com/openai/codex>.
- OpenAI. 2026. **Introducing gpt-5-3-codex**. <https://openai.com/index/introducing-gpt-5-3-codex/>.
- Krista Opsahl-Ong, Arnav Singhvi, Jasmine Collins, Ivan Zhou, Cindy Wang, Ashutosh Baheti, Owen Oertell, Jacob Portes, Sam Havens, Erich Elsen, Michael Bendersky, Matei Zaharia, and Xing Chen. 2026. **Officeqa pro: An enterprise benchmark for end-to-end grounded reasoning**. *Preprint*, arXiv:2603.08655.
- Sharath Chandra Raparthy, Eric Hambro, Robert Kirk, Mikael Henaff, and Roberta Raileanu. 2023. **Generalization to new sequential decision making tasks with in-context learning**. *Preprint*, arXiv:2312.03801.
- Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. 2023. **Toolformer: Language models can teach themselves to use tools**. *Preprint*, arXiv:2302.04761.
- Yongliang Shen, Kaitao Song, Xu Tan, Dongsheng Li, Weiming Lu, and Yueting Zhuang. 2023. **Hugging-gpt: Solving ai tasks with chatgpt and its friends in hugging face**. *Preprint*, arXiv:2303.17580.
- Xiangru Tang, Daniel Shao, Jiwoong Sohn, Jiapeng Chen, Jiayi Zhang, Jinyu Xiang, Fang Wu, Yilun Zhao, Chenglin Wu, Wenqi Shi, Arman Cohan, and Mark Gerstein. 2025. **Medagentsbench: Benchmarking thinking models and agent frameworks for complex medical reasoning**. *Preprint*, arXiv:2503.07459.
- Ke Wang, Houxing Ren, Aojun Zhou, Zimu Lu, Sichun Luo, Weikang Shi, Renrui Zhang, Linqi Song, Mingjie Zhan, and Hongsheng Li. 2024. **Mathcoder: Seamless code integration in LLMs for enhanced mathematical reasoning**. In *The Twelfth International Conference on Learning Representations*.
- Tongtong Wu, Linhao Luo, Yuan-Fang Li, Shirui Pan, Thuy-Trang Vu, and Gholamreza Haffari. 2024. **Continual learning for large language models: A survey**. *Preprint*, arXiv:2402.01364.
- Yuning Wu, Jiahao Mei, Ming Yan, Chenliang Li, Shaopeng Lai, Yuran Ren, Zijia Wang, Ji Zhang, Mengyue Wu, Qin Jin, and Fei Huang. 2025. **Writingbench: A comprehensive benchmark for generative writing**. *Preprint*, arXiv:2503.05244.
- Qianqian Xie, Weiguang Han, Zhengyu Chen, Ruoyu Xiang, Xiao Zhang, Yueru He, Mengxi Xiao, Dong Li, Yongfu Dai, Duanyu Feng, Yijing Xu, Haoqiang Kang, Ziyang Kuang, Chenhan Yuan, Kailai Yang, Zheheng Luo, Tianlin Zhang, Zhiwei Liu, Guojun Xiong, and 15 others. 2024. **Finben: A holistic financial benchmark for large language models**. *Preprint*, arXiv:2402.12659.

Renjun Xu and Yang Yan. 2026. [Agent skills for large language models: Architecture, acquisition, security, and the path forward](#). *Preprint*, arXiv:2602.12430.

Qianyu Yang, Yang Liu, Jiaqi Li, Jun Bai, Hao Chen, Kaiyuan Chen, Tiliang Duan, Jiayun Dong, Xiaobo Hu, Zixia Jia, Yang Liu, Tao Peng, Yixin Ren, Ran Tian, Zaiyuan Wang, Yanglihong Xiao, Gang Yao, Lingyue Yin, Ge Zhang, and 4 others. 2026. [Sonemillion-bench: How far are language agents from human experts?](#) *Preprint*, arXiv:2603.07980.

Bowen Ye, Rang Li, Qibin Yang, Yuanxin Liu, Linli Yao, Hanglong Lv, Zhihui Xie, Chenxin An, Lei Li, Lingpeng Kong, Qi Liu, Zhifang Sui, and Tong Yang. 2026. [Claw-eval: Towards trustworthy evaluation of autonomous agents](#). *Preprint*, arXiv:2604.06132.

Jie Zhang, Cezara Petrucci, Kristina Nikolić, and Florian Tramèr. 2025. [Realmath: A continuous benchmark for evaluating language models on research-level mathematics](#). *Preprint*, arXiv:2505.12575.

Yuxuan Zhang, Yubo Wang, Yipeng Zhu, Penghui Du, Junwen Miao, Xuan Lu, Wendong Xu, Yunzhuo Hao, Songcheng Cai, Xiaochen Wang, Huaisong Zhang, Xian Wu, Yi Lu, Minyi Lei, Kai Zou, Huifeng Yin, Ping Nie, Liang Chen, Dongfu Jiang, and 2 others. 2026. [Clawbench: Can ai agents complete everyday online tasks?](#) *Preprint*, arXiv:2604.08523.

Shanshan Zhong, Yi Lu, Jingjie Ning, Yibing Wan, Lihan Feng, Yuyi Ao, Leonardo F. R. Ribeiro, Markus Dreyer, Sean Ammirati, and Chenyan Xiong. 2026. [Skilllearnbench: Benchmarking continual learning methods for agent skill generation on real-world tasks](#). *Preprint*, arXiv:2604.20087.

Aojun Zhou, Ke Wang, Zimu Lu, Weikang Shi, Sichun Luo, Zipeng Qin, Shaoqing Lu, Anya Jia, Linqi Song, Mingjie Zhan, and Hongsheng Li. 2024. [Solving challenging math word problems using GPT-4 code interpreter with code-based self-verification](#). In *The Twelfth International Conference on Learning Representations*.

Fengbin Zhu, Wenqiang Lei, Youcheng Huang, Chao Wang, Shuo Zhang, Jiancheng Lv, Fuli Feng, and Tat-Seng Chua. 2021. [Tat-qa: A question answering benchmark on a hybrid of tabular and textual content in finance](#). *Preprint*, arXiv:2105.07624.

A Detailed Task Sources

In this section, we provide a comprehensive overview of the primary data sources integrated into CONTINUALSKILLBENCH. To construct a robust evaluation suite, we combine cross-domain foundational benchmarks with specialized, domain-specific datasets. Table 3 summarizes the datasets utilized and their respective target capabilities.

A.1 Dataset Descriptions

Cross-Domain Benchmarks To establish a foundational baseline for general assistant capabilities, we integrate several comprehensive benchmarks across multiple domains (Finance, Healthcare, Law, and Office). Specifically, **ClawBench** (Zhang et al., 2026) is utilized to evaluate multi-step workflow execution and cross-application tool manipulation. **OneMillionBench** (Yang et al., 2026) provides high-throughput tasks for large-scale text processing and entity extraction. Furthermore, **GAIA** (Mialon et al., 2023) is incorporated to challenge models with complex, real-world multimodal reasoning and long-horizon assistant workflows.

Finance Beyond general text processing, the financial tasks in CONTINUALSKILLBENCH are designed to evaluate high-precision numerical accuracy and strategic decision-making. We integrate data from **TAT-QA** (Zhu et al., 2021) to challenge the model’s hybrid table-text question answering, while **InvestorBench** (Li et al., 2024) and **FinBen** (Xie et al., 2024) provide professional-grade foundations for investment analysis, portfolio optimization, and core financial knowledge.

Healthcare Evaluating clinical assistants requires a rigorous combination of specialized medical knowledge and safe diagnostic reasoning. We adapt professional clinical reasoning scenarios from **PhysicianBench** (Liu et al., 2026), multi-agent consultation setups from **MedAgentsBench** (Tang et al., 2025), and public health scenarios from **HealthBench** (Arora et al., 2025). These domain-specific tasks ensure robust evaluation of clinical safety and collective diagnostic accuracy.

Law Legal evaluation within our benchmark hinges on absolute textual precision, statutory interpretation, and rigorous clause matching. We draw heavily from **LegalBench** (Guha et al., 2023) for structured legal reasoning, and incorporate localized legal knowledge using **LawBench** (Fei et al., 2023). Professional legal intelligence data from **harvey-labs** (Gruppen et al., 2026) and legal examination tracks from **Lexam** (Fan et al., 2026) are embedded to test advanced analysis and citation matching.

Math Mathematical logic is evaluated up to competition and research-level intensities. We source highly sophisticated problems from **OlympiadBench** (Gao et al., 2024), **amc12** (edev2000, 2025),

Domain	Source Dataset	Core Capability / Subtask Focus
Cross-Domain	ClawBench	Sequential workflows, tool manipulation, and multi-step execution
	OneMillionBench	Large-scale information extraction, text processing, and document comprehension
	GAIA	Complex multimodal assistant tasks and real-world reasoning
Finance	InvestorBench	Investment evaluation, quantitative analysis, and portfolio optimization
	TAT-QA	Hybrid tabular-textual financial reasoning and numerical computation
	FinBen	Comprehensive core financial capability and knowledge evaluation
Healthcare	MedAgentsBench	Multi-agent medical consultation and collective diagnostic reasoning
	HealthBench	Public health question answering and consumer medical understanding
	PhysicianBench	Professional clinical diagnostic reasoning and differential analysis
Law	LegalBench	Collaborative legal reasoning, contract classification, and rule application
	LawBench	Legal knowledge alignment, statutory understanding, and case analysis
	harvey-labs	Professional-grade legal analysis, citation matching, and draft auditing
	Lexam	Bar examination comprehension and statutory interpretation
Math	OlympiadBench	High-level competition mathematics and advanced problem solving
	amc12	American Mathematics Competitions (Grade 12) reasoning tracks
	aime	American Invitational Mathematics Examination challenge cases
	NuminaMath	Diverse chain-of-thought mathematical reasoning and logic tracing
	OmniMath	Comprehensive multi-discipline mathematical suite covering diverse topics
	Putnam_Axiom	Research-level axiomatic mathematics and rigorous Putnam-level proofs
Office	MathCoder	Mathematics-oriented code generation, execution, and self-debugging
	RealMath	Grounded real-world numerical problem solving and applied math scaling
	OfficeQA	Paragraph-level question answering over complex enterprise documents
	WritingBench	Professional document drafting, stylistic refinement, and formatting

Table 3: Summary of source datasets and their corresponding target capabilities in CONTINUALSKILLBENCH, categorized into cross-domain foundational benchmarks and domain-specific suites.

aime (Emergent Mind, 2026), and the axiomatic proof tracks of **Putnam_Axiom** (Gulati et al., 2025). Broader multi-discipline mathematical reasoning paths are enriched via **NuminaMath** (Li et al., 2024) and **OmniMath** (Gao et al., 2024). Additionally, code-driven mathematical solving and execution-based validation environments are established through the integration of **MathCoder** (Wang et al., 2024; Zhou et al., 2024) and **RealMath** (Zhang et al., 2025).

Office Office tasks simulate daily desktop automation and specialized enterprise document processing. We utilize **OfficeQA** (Opsahl-Ong et al., 2026) for paragraph-level question answering and information retrieval over complex documents, combined with **WritingBench** (Wu et al., 2025) to evaluate professional content generation, stylistic refinement, and formatting capabilities.

B Pairwise Dependency Evaluation and Graph-based Ordering

B.1 Pairwise Dependency Evaluation

For each domain, we sample 200 unordered pairs from the 100 filtered tasks. Each pair is evaluated in both directions, producing 400 directional judgments per domain.

Given a pair of tasks (A, B) , the LLM (specifically GPT-5.4) determines whether completing Task A could provide skills useful for Task B , and vice versa. Each direction is assigned one of three labels: YES, PARTIAL, or NO.

A YES judgment indicates a clear potential transfer relationship and is used to construct the dependency graph. PARTIAL and NO judgments are retained for analysis but are not used as graph edges.

The prompt we use is as follows:

Skill Transfer Judge Prompt

You are evaluating whether two tasks share transferable skills that an AI agent could learn.

Input tasks

Task A: {task_a['question']}

Task B: {task_b['question']}

Instruction

Analyze the skill transfer relationship between these two tasks. Consider:

1. Prerequisite sub-skills: Does Task A require sub-skills (e.g., reading tables, ratio calculation, parsing text) that also appear in Task B? Or vice versa?
2. Shared skill practice: Do both tasks exercise the same underlying skill, meaning doing either one gives useful practice for the other?
3. Transfer direction: Is the transfer primarily A->B (doing A first helps B), B->A (doing B first helps A), or bidirectional?

Required output

Respond in this exact JSON format:

```
{ "a_helps_b": "YES" | "PARTIAL" | "NO",  
  "b_helps_a": "YES" | "PARTIAL" | "NO",  
  "shared_skills": ["skill1", "skill2"],  
  "reason": "one sentence explaining the main  
  skill relationship"  
}
```

Table 4: Pairwise dependency judgments across the five domains. Each sampled pair is evaluated in both directions, producing 400 directional judgments per domain.

Domain	Tasks	Pairs	Yes	Partial	No
Finance	100	200	112	96	192
Law	100	200	94	117	189
Office	100	200	103	108	189
Healthcare	100	200	121	102	177
Math	100	200	76	134	190

B.2 Graph-based Ordering

We construct a directed graph $G = (V, E)$ from the pairwise judgments. Each node in V represents a task, and an edge $A \rightarrow B$ is added when the LLM assigns YES to the corresponding transfer direction. An edge therefore indicates that Task A is expected to provide skills useful for Task B .

The final task order is generated under a curriculum constraint. Tasks are first grouped by difficulty level and processed from easier to more challenging levels. For Mathematics, we use the predefined skill layers as the curriculum levels. Edges that point from a higher curriculum level to a lower one are removed so that they do not conflict with the intended progression.

Within each curriculum level, we apply a greedy

variant of Kahn’s topological sorting algorithm. At each step, we identify tasks with no remaining incoming edges and select the one with the largest outgoing degree. This prioritizes tasks that are expected to provide useful skills for more downstream tasks. If the graph contains a cycle and no zero-in-degree task is available, we break the cycle by selecting the remaining task with the largest outgoing degree. Finally, the ordered curriculum levels are concatenated to form the complete 100-task sequence.

C Structural Validation of Skill Continuity

This section provides the definitions and domain-level results for the structural validation introduced in Section 3.3. The purpose of this analysis is to examine whether tasks in the curated sequences require recurring core skills, particularly within a local history window.

C.1 Task-level Skill Annotation

We use a locally served Qwen3-32B model as the skill annotator. The model is deployed through vLLM with an OpenAI-compatible interface. We use temperature 0 and random seed 42, and disable the model’s thinking mode. The same model configuration and annotation prompt are used for all five domains.

Each task is annotated independently. The annotator receives the task instruction, any workspace-file metadata, and up to five evaluation requirements when available. It does not receive the task’s sequence position, source benchmark, reference answer, or annotations from other tasks. In particular, the sequence index is removed before the annotation request is constructed, preventing the intended order from directly influencing the extracted skills.

The annotation prompt asks the model to identify the smallest set of reusable capabilities or procedures needed to complete the task. A valid skill must describe an observable operation that could be reused in another task, such as *table information extraction*, *percentage-change calculation*, or *statutory-rule application*, rather than a broad topic such as “finance” or a task-specific description such as “solve this problem.” For each task, the model returns between one and eight skills with the following fields:

- a lowercase, snake-case skill name;

- a short description of the reusable capability;
- a skill type from *knowledge*, *reasoning*, *tool*, *workflow*, or *output*;
- an importance label of either *core* or *support*; and
- a short task-grounded justification.

Core skills are the main capabilities exercised by the task, whereas supporting skills describe secondary operations that assist task completion. We apply deterministic post-processing to the model outputs. Skill names are converted to lowercase snake case, duplicate names within a task are removed, and malformed outputs are rejected and re-tried. Skills that describe only benchmark-interface requirements—such as multiple-choice selection, exact-match formatting, JSON answer wrappers, or mandated output filenames—are removed. Retrieval is retained as a skill only when the task requires locating information outside the supplied materials. These rules prevent superficial similarities in evaluation format from being counted as transferable task-solving skills.

For the structural analysis, we retain only skills labeled as *core*. Let $\mathcal{S}_i$ denote the set of core skills required by the task at position i . The annotation process produces 318 unique core-skill names in Law, 335 in Finance, 345 in Healthcare, 262 in Mathematics, and 284 in Office. These are free-form skill annotations rather than labels selected from a predefined ontology; the semantic matching procedure described below is therefore used to account for differently named skills that express similar capabilities.

Task-level (abridged)	Skill	Annotation	Prompt
Given a task, identify the smallest reusable skills that an agent must execute to solve it. A skill should describe an observable capability or procedure rather than a broad topic or a description specific to this task. Return 1–8 skills. For each skill, provide a lowercase snake-case name, a reusable description, its type (knowledge, reasoning, tool, workflow, or output), its importance (core or support), and a short task-grounded justification. Ignore benchmark-interface mechanics such as selecting an answer option, exact-match formatting, JSON answer wrappers, and mandated output filenames. Include retrieval only when the task requires locating information outside the supplied materials.			

Because independently generated skill names may differ despite describing similar capabilities,

exact string matching provides an incomplete estimate of skill reuse. We therefore construct a textual representation for each skill by combining its normalized name with up to two task-independent descriptions. We encode these representations using sentence-transformers/all-mpnet-base-v2 and compute their cosine similarity. Two skills s and s' are treated as semantic counterparts when

$$\text{sim}(s, s') \geq \tau, \quad \tau = 0.85. \quad (1)$$

Exact normalized-name matches are included as semantic matches. The primary analysis uses $\tau = 0.85$, while results under alternative thresholds are reported below.

C.2 Skill-continuity Metrics

For a task at position i , we consider a history window containing the previous w tasks,

$$\mathcal{H}_i^{(w)} = \{\mathcal{S}_j \mid \max(1, i - w) \leq j < i\}. \quad (2)$$

When the complete preceding history is used, we write $\mathcal{H}_i^{(\text{all})}$. A core skill $s \in \mathcal{S}_i$ is considered covered if at least one skill in the selected history is its semantic counterpart. The historical core-skill coverage of task i is therefore

$$C_i^{(w)} = \frac{1}{|\mathcal{S}_i|} \sum_{s \in \mathcal{S}_i} \mathbb{1} \left[\max_{\substack{s' \in \mathcal{S}_j \\ \max(1, i-w) \leq j < i}} \text{sim}(s, s') \geq \tau \right]. \quad (3)$$

We summarize the sequence using two metrics:

- **Task reuse rate:** the fraction of tasks after the first for which $C_i^{(w)} > 0$, meaning that at least one required core skill has a counterpart in the selected history.
- **Mean core-skill coverage:** the average value of $C_i^{(w)}$ over all tasks after the first. This measures the fraction of each target task’s core-skill requirements that have appeared previously.

All reported cross-domain averages are macro-averages: we first calculate each metric separately within every domain and then average the five domain-level values.

Table 5: Core-skill recurrence within the preceding task history at cosine threshold $\tau = 0.85$. The task reuse rate is the percentage of tasks after the first with at least one matched core skill. Mean coverage is averaged over target tasks within each domain.

Domain	Task reuse rate	Mean coverage
Law	67.7	29.8
Finance	67.7	36.6
Healthcare	63.6	23.2
Mathematics	70.7	41.6
Office	77.8	46.2
Macro average	69.5	35.5

C.3 Overall Skill Recurrence

Table 5 reports the results when the complete preceding history is used. Across domains, between 63.6% and 77.8% of eligible tasks reuse at least one previously encountered core skill. The corresponding mean core-skill coverage ranges from 23.2% in Healthcare to 46.2% in Office. Macro-averaged across the five domains, the task reuse rate is 69.5%, and the mean core-skill coverage is 35.5%.

C.4 Comparison with Random Task Orders

Overall recurrence alone does not determine whether related skills occur near one another. We therefore compare the curated order with random permutations using local history windows of $w \in \{1, 5, 10\}$. For every domain and window size, we randomly permute the 100 tasks 10,000 times while keeping the task annotations fixed. For each permutation, we recompute the mean core-skill coverage using the same history window.

Let $C_{\text{obs}}^{(w)}$ denote the coverage of the curated order and let $C_b^{(w)}$ denote the coverage of random permutation b . We report the ordered-minus-random difference

$$\Delta^{(w)} = C_{\text{obs}}^{(w)} - \frac{1}{B} \sum_{b=1}^B C_b^{(w)}, \quad B = 10,000. \quad (4)$$

The one-sided permutation-test p -value is calculated as

$$p = \frac{1 + \sum_{b=1}^B \mathbb{I}[C_b^{(w)} \geq C_{\text{obs}}^{(w)}]}{B + 1}. \quad (5)$$

We apply Holm correction jointly over the displayed domain–window comparisons. Figure 4 shows the resulting coverage differences.

Table 6: Sensitivity of the all-history recurrence results to the semantic similarity threshold. Exact denotes normalized-name matching without semantic extension.

Matching rule	Task reuse rate	Mean coverage
Exact name	59.6	26.7
Cosine ≥ 0.80	79.4	44.5
Cosine ≥ 0.85	69.5	35.5
Cosine ≥ 0.90	63.8	29.4

The curated order achieves higher coverage in all five domains and all three local windows. The improvement is positive in all 15 domain–window comparisons and remains significant after Holm correction in ten comparisons. The largest gains occur in Finance, where coverage exceeds the random-order mean by 5.6, 5.1, and 3.9 percentage points for windows of 1, 5, and 10 tasks, respectively. Law shows significant improvements across all three windows, while Healthcare and Office show significant improvements in the shorter local windows. Mathematics exhibits positive differences for all three windows, although these differences do not remain significant after correction.

These results indicate that the ordered sequences possess a clear local skill-continuity structure: tasks appearing near one another are more likely to require overlapping or semantically related core skills than under random ordering. The analysis establishes structural opportunities for skill reuse; whether agents successfully exploit these opportunities is evaluated separately through the sequential experiments.

C.5 Sensitivity to the Similarity Threshold


Table 6 reports the macro-averaged results under exact normalized-name matching and three semantic similarity thresholds. The central conclusion is stable across the tested thresholds. Even with the stricter threshold of 0.90, 63.8% of tasks reuse at least one previous core skill. Exact matching gives a more conservative lower bound, as it does not merge differently named descriptions of similar capabilities.

D Full Prompts for the Three-Turn Interaction Protocol

Each subtask in Sequential execution follows the same three-turn interaction protocol:

1. **Task Introduction.** The agent receives the subtask instruction together with its current

Local core-skill coverage gain over random order (cosine ≥ 0.85)

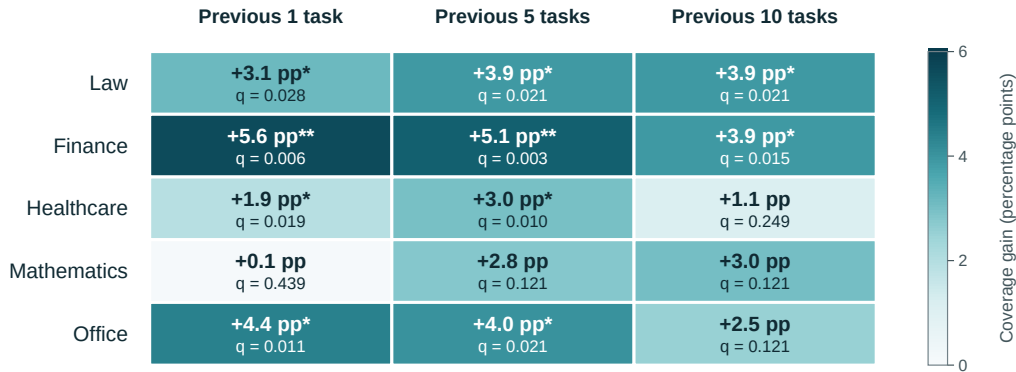

Holm-adjusted over 15 domain-window tests; * $q < .05$, ** $q < .01$, *** $q < .001$

Figure 4: Difference in mean core-skill coverage between the curated sequences and random task permutations. Positive values indicate that the curated order places semantically related core skills closer together than expected under random ordering. The local windows cover the preceding 1, 5, or 10 tasks. Reported q -values are Holm-adjusted; * $q < 0.05$, ** $q < 0.01$, and *** $q < 0.001$.

skill repository. It is prompted to review the available skills and determine whether any are relevant to the task.

2. **Task Execution.** The agent performs the task using the available skills, tools, and external resources when necessary. Its actions and outputs are recorded for evaluation.

3. **Reflection and Skill Update.** After execution, the agent receives evaluator feedback, such as programmatic test results or rubric-level scores. It is prompted to diagnose failures and determine whether the experience should be consolidated into a reusable skill. The agent may create a new skill or revise an existing one using the **Create Skill** and **Modify Skill** meta-skills. The updated repository is available in subsequent subtasks.

Figure 5 shows the instruction used during the skill-maintenance turn. The complete prompts for all three turns are provided below.

Maintenance Hint Prompt for Skill Generation

Based on feedback, update the skill library so the next task benefits:

1. Read SKILL.md of create-skill or modify-skill and follow every workflow step.
2. Every SKILL.md must begin with YAML front matter:

```

---
name: <skill-name>
description: <one-line>
---
```

Otherwise it will not load.

3. Extract Core Skills:
Do not memorize this task. Abstract feedback into methods, architectural patterns, or universal domain rules.
4. Maximize Reusability:
Keep skills modular and broadly applicable. Avoid task IDs, temporary names, or absolute paths.

Figure 5: Prompt used during the reflection and skill-maintenance turn. The agent is instructed to create or revise valid skills through the **Create Skill** and **Modify Skill** meta-skills.

Codex Sequential Agent Prompt: Run Orientation

Turn 0: Sequential run orientation (injected once before all subtasks).

You are running inside Harbor's Codex Sequential Agent.

This session will present {n_tasks} task(s) one at a time. For each task you will receive three turns:

Turn 1 – Task + skill index: the task instruction plus a listing of available skills.

Turn 2 – Execute: complete the task.

Turn 3 – Judge feedback + skill maintenance: receive an automated judge score and feedback, then update the skill library using the create-skill and modify-skill meta-skills so future tasks benefit.

Rules:

- Prefer skills found under {skills_dir}/. Inspect them before inventing a new approach.
- After completing each task, the judge will run automatically – wait for Turn 3.
- Use create-skill to add a new skill and modify-skill to update an existing one. Both meta-skills live in {skills_dir}.

Turn 1: Task instruction.

[Task {task_num} of {n_tasks}]
 {sub_instruction}

If this is not the first subtask, the following memory hint is prepended:

Previous task context and judge feedback are at
 /root/task_memory.md; read it before starting.

[Task {task_num} of {n_tasks}]
 {sub_instruction}

Turn 2: Execution.

No additional user prompt is injected in this turn. The Codex agent executes the current subtask after receiving the Turn 1 instruction. After execution, Harbor runs the automated judge externally and writes feedback to /logs/verifier/task_{task_num}_feedback.json.

Turn 3: Judge feedback and skill maintenance.

Judge feedback for task {task_num} is now available at /logs/verifier/task_{task_num}_feedback.json. Read the file and review the score and rubric breakdown.

Based on this feedback, update the skill library so the next task benefits:

1. Read the SKILL.md of create-skill or modify-skill in \$HOME/.agents/skills/, and follow its workflow exactly.
2. Every SKILL.md you write or modify must begin with YAML front matter. Skills without the header will not be loaded by the framework.
3. Extract core skills: do not memorize the solution or hardcode fixes for this specific task. Abstract feedback into a reusable methodology, architectural pattern, or universal domain rule.
4. Maximize reusability: keep the documented skill modular and broadly applicable to future unseen tasks. Avoid hardcoding task IDs, temporary variable names, or absolute file paths.

E Example Task Format and Skill-Dependency Chain

To make the benchmark format more concrete, we show an example chain from the **Finance** domain. We omit irrelevant tables, filings, and data fields for space.

Table 7: RAG ablation on Opus 4.7. RAG retrieves prior trajectory context, while Seq. maintains explicit skills.

Domain	Setting	Subtask Rewards			Reward	
		EM	Prog.	Rubric	Raw	Norm.
Healthcare	RAG	0.815	0.500	0.539	0.574	0.617
	Seq.	0.926	0.500	0.517	0.631	0.635

Task 1: ... What is the amount of cash and cash equivalents held by the company in 2018 and 2019 respectively?

Task 7: ... What was the amount of value-added tax receivables, net, noncurrent in 2019?

Task 35: ... What was the percent growth of The Priceline Group Inc. from 2014 to 2015?

Task 50: Does 3M have a reasonably healthy liquidity profile based on its quick ratio for Q2 FY2023? If the quick ratio is not relevant to measuring liquidity, state that and explain why.

Task 81: ... Requirements:

1. Read the provided financial data files.
2. Calculate the required financial components.
3. Compute the weights for equity and debt in the capital structure.
4. Calculate the final WACC using the given formula.
5. Handle edge cases.

This chain illustrates how reusable skills can transfer across subtasks. Early tasks such as Task 1 and Task 7 require locating values in financial tables and matching rows, columns, periods, and units. Later tasks reuse these operations as subroutines for more complex reasoning: Task 35 adds percentage-growth calculation, Task 50 adds ratio computation and financial interpretation, and Task 81 requires a programmatic WACC workflow with data loading, formula application, and output validation. Thus, skills for table parsing, period-specific value extraction, unit normalization, formula application, and validation can be learned early and reused in later subtasks.

F Additional Ablation: Retrieval-Augmented Trajectory Memory

We also evaluate a retrieval-augmented generation (RAG) baseline, where prior trajectory snippets are indexed and retrieved for later subtasks instead of maintaining an explicit skill library. The results are shown in Table 7.

The RAG baseline shows a similar pattern to the ICL setting. It improves rubric-judged subtasks, which suggests that part of the rubric gain may

be a side effect of adapting to prior feedback and response patterns rather than evidence of reusable skill acquisition. In contrast, Seq. remains stronger on exact-match rewards, indicating that explicit skill maintenance is more useful for enforcing strict output formats, answer normalization, and step-by-step verification. This echoes the conclusion in Section 4.3: contextual adaptation can help open-ended rubric-style answers, while explicit skills provide a more disciplined workflow for tasks with stricter correctness constraints.

G Analysis on Generated Skills

We further analyze the quality of generated skills using GPT-4.1-mini. All generated skills are extracted and sent to the LLM through the following prompt:

You are a strict evaluator of agent Skill files.
A Skill is a reusable instruction file that an agent may load before future tasks. Good Skills are not task memorization: they abstract a reusable method, say when to use it, provide executable steps or formulas/templates, include pitfalls/validation checks, and stay concise enough to be useful.
Judge only the provided Skill content. Do not reward domain correctness beyond what can be inferred from the text. Penalize missing/truncated content, raw placeholders, task-specific paths, or instructions that would not generalize. Return only valid JSON matching the requested schema.
Score the requested indicators directly. Do not invent an overall score; it will be computed outside the judge.

Format/loadability indicators, each 0 or 1:

- front_matter_valid: has a valid YAML front matter block.
- name_present: YAML front matter contains a non-empty name field.
- name_match: YAML name matches the skill name/title.
- description_present: has a one-sentence description.

Content-quality indicators, each 0, 0.5, or 1:

- specificity: clear use case, trigger, or scope boundary.
- procedure_score: executable steps, formulas, templates, checklist, or decision tree.
- generalization_score: abstracts a reusable method rather than memorizing one task.
- anti_pitfall_score: includes common mistakes, counterexamples, edge cases, or failure modes.
- verification_score: includes validation/checklist/gate before final output.
- minimality: neither too short to be useful nor bloated/distracting.
- toolability: contains reusable code, command, schema, formula, table, or template.
- domain_grounding: includes necessary domain-specific safety/compliance/source constraints.

We compute the final skill-quality score as

$$\text{score} = \text{format} \times \text{content},$$

Table 8: Quality evaluation of generated skills across models and domains. Skill pool size here counts only agent-generated skills, excluding meta skills and initially provided skills.

Model	Domain	Skill Pool Size	Avg. Quality Score
GPT-4o	Finance	48	5.79
GPT-5.3-Codex	Finance	28	7.89
GPT-4o	Healthcare	81	5.36
GPT-5.3-Codex	Healthcare	38	8.19
GPT-4o	Law	72	5.25
GPT-5.3-Codex	Law	43	7.95
GPT-4o	Math	97	5.74
GPT-5.3-Codex	Math	48	7.43
GPT-4o	Office	86	6.24
GPT-5.3-Codex	Office	48	8.27
GPT-4o	Overall	384	5.68
GPT-5.3-Codex	Overall	205	7.94

a skill with high-quality content but invalid formatting receives a score of 0, because it cannot be reliably loaded and reused by the agent in future subtasks. The results are shown in Table 8.

These results provide additional evidence for the skill-fragmentation pattern discussed in Finding 4.4. GPT-4o produces a much larger number of skills across domains (384 in total), but their average quality score is substantially lower (5.68). In contrast, GPT-5.3-Codex maintains a smaller skill pool (205 skills) with consistently higher quality (7.94 on average). This suggests that stronger models are better at consolidating repeated experience into compact and reusable abstractions, whereas weaker models tend to generate more fragmented or task-specific skills that are less useful for future subtasks. Thus, the quality evaluation supports our interpretation that skill fragmentation is one reason why weaker models benefit less reliably from long-term sequential skill learning.

H Examples of Generated Skills

To provide a clearer view of what a generated skill looks like, we list three generated skills from GPT-4o, GPT-5.3-Codex and Claude 4.7 Opus here.

```
This skill is generated by GPT-4o.
---
name: date-range-filter
description: Filter data by specific date range for trading tasks.
---

# Date Range Filter

## What it does
Filters trading data within a specified start date to one day before the end date.

## Implementation
```

```

```python
def filter_dates(data, start_date, end_date):
 filtered_data = {}
 for date, entry in data.items():
 if start_date <= date < end_date:
 filtered_data[date] = entry
 return filtered_data

Example Usage
filtered_data = filter_dates(data, 2020-10-01,
 2021-05-05)
```

## Key Parameters / Notes
- `start_date` and `end_date` should be in YYYY-MM-DD format.
- Excludes `end_date` itself in filtering.
- Ensures compliance with trading period requirements.

```

This skill is generated by GPT-5.3-Codex.

```

---
name: tatqa-metric-alignment
description: Align financial QA answers to the exact asked metric by reconciling table rows, subtotals, and narrative context with unit and period checks.
---

```

TAT-QA Metric Alignment

What It Does
Prevents extraction mistakes in financial table QA by forcing a metric-match check before selecting values.

Workflow

1. Parse the question target exactly:
 - Metric noun phrase (for example: `cash and cash equivalents`, `total liquidity`, `current assets`).
 - Requested periods and order (for example: `2018 and 2019 respectively` means output `2018 | 2019`).
 - Required granularity (`exact table amount` vs `approximately` phrasing).
2. Build candidate values from both sources:
 - Table row values (line items).
 - Table subtotal/total rows.
 - Narrative context values (especially management summary sentences).
3. Resolve source selection with this priority:
 - If the question asks for a line item and only the table has that line item, use the line item.
 - If the question wording is broad (`had`, `liquidity`, `available`) and context explicitly states a combined figure, prefer the context-stated combined amount.
 - If context restates table values at different precision (for example thousands vs millions), match the style used in the wording expected by the prompt/judge.
4. Validate before finalizing:
 - Unit check: thousands vs millions.
 - Composition check: line item vs subtotal vs combined categories.
 - Time-order check: ensure output order matches `respectively` order.

Common Pitfalls

- Returning a component (`cash & cash equivalents`) when the prompt/judge expects a combined liquidity figure (`cash + short-term investments`).
- Mixing unit scales (`18,304` in thousands vs `\$18.3 million`).
- Reversing years when `respectively` is present.

Output Rule Template

When format is ``\$X | \$Y``:

- Map X to first requested period.
- Map Y to second requested period.
- Keep currency symbols and unit style consistent with selected source.

This skill is generated by Claude 4.7 Opus.

```

---
name: medical-advice-openended
description: Answer open-ended medical advice questions (often in patient-facing language, possibly non-English) and produce a structured JSON output with findings, citations, and conclusions.
---

```

Open-Ended Medical Advice Tasks

Task Format

Some tasks present a patient question or scenario (sometimes in a non-English language: French, Spanish, etc.) and ask for clinically accurate guidance. Output is a JSON OBJECT (not a single letter) typically with keys like findings/citations/conclusions.

CRITICAL: Always Write Output File First

Some turns are truncated. ALWAYS write `/app/task\_{NNN}\_output.json` BEFORE doing extensive exploration or reading. Write a first-pass JSON immediately, then refine.

Required Output

- Path: `/app/task\_{NNN}\_output.json` (zero-pad N to 3 digits)
- A JSON OBJECT -- typical keys: `key\_findings`, `citations`, `conclusions`, `recommendation`
- Language: respond in the same language as the prompt where possible.

Workflow

1. Identify task number; determine output path.
2. Translate the prompt mentally if non-English.
3. Draft a structured answer with:
 - `key\_findings`: bullet list of medically relevant facts
 - `country\_specific` (when relevant): differences across major countries (US/CDC, France/HAS, UK/NHS, Germany/STIKO, WHO)
 - `recommendation`: clear, safe clinical guidance
 - `citations`: list of authoritative sources (CDC, WHO, HAS, NHS, NICE, UpToDate, peer-reviewed)
 - `safety\_notes`: caveats (consult local physician, individual factors)
4. WRITE THE FILE.

Common Topics & Quick References

Pertussis Booster (whooping cough / coqueluche)

- Adults: One Tdap dose; then Td/Tdap booster every 10 years
- Pregnancy: Tdap each pregnancy (27-36 weeks US, 16-32 UK, 20-36 France)
- Cocoon strategy: parents, grandparents, caregivers of infants <12 mo
- Healthcare workers: one dose if not received as adult
- Country specifics:
 - US (CDC/ACIP): Tdap once for adults 19+, repeat Td every 10y
 - France (HAS): rappel adulte a 25 ans dTcaPolio; rattrapage jusqu'a 39 ans
 - UK (NHS): pregnant women routinely; no universal adult booster
 - Germany (STIKO): one adult booster with next Td
 - Canada: one adult Tdap; pregnancy 27-32 wks
 - Australia: adult booster recommended esp. for infant contacts

Influenza vaccine

- Annual, all adults; CDC recommends for all >=6 mo

COVID-19 boosters

- Updated annually; risk-based for high-risk groups

HPV

- Up to age 26 routine, 27-45 shared decision-making

Shingles (zoster)

- Shingrix 2 doses, adults >=50

Example

```

```python

```

```

import json
output = {
 "key_findings": [...],
 "country_specific_recommendations": {"US": "...", "
 France": "..."},
 "recommendation": "...",
 "citations": ["CDC ACIP 2024", "HAS calendrier
 vaccinal 2024"],
 "safety_notes": "Consult your physician for
 individual factors."
}
with open("/app/task_002_output.json", "w") as f:
 json.dump(output, f, ensure_ascii=False, indent=2)
...

Pitfalls
- DO NOT skip writing the file even if you only have a
 partial answer.
- Open-ended != MCQ. Check task wording: "JSON object
 with your key findings, citations, and conclusions"
 -> structured object.
- Some prompts arrive in French/Spanish -- answer in the
 prompt language when natural.
- The verifier may use an LLM judge with a rubric; cover
 multiple dimensions (recommendation, country
 variation, safety, citations).

```

These examples show that stronger models tend to produce skills with more structured workflows, explicit validation steps, and clearer pitfall awareness, which helps explain their larger and more reliable sequential gains in domains such as Finance and Healthcare.