



Introduction to Cyclical Learning Rates for Training Neural Nets

Sayak Paul (Project Instructor @ DataCamp)



22 - 25 November, 2018




NIMHANS Convention Center, Bengaluru





- Why are *learning rates* used?
- Some existing approaches for choosing the right learning rate
- What are the *shortcomings of these approaches*?
- Need of a systematic approach for setting the learning rate –
 Cyclical Learning Rates (CLR)
- What is CLR?
- Some amazing results shown by CLR
- Conclusion

Learning is an important *hyperparameter* for adjusting the weights of a network with respect to the loss gradient.

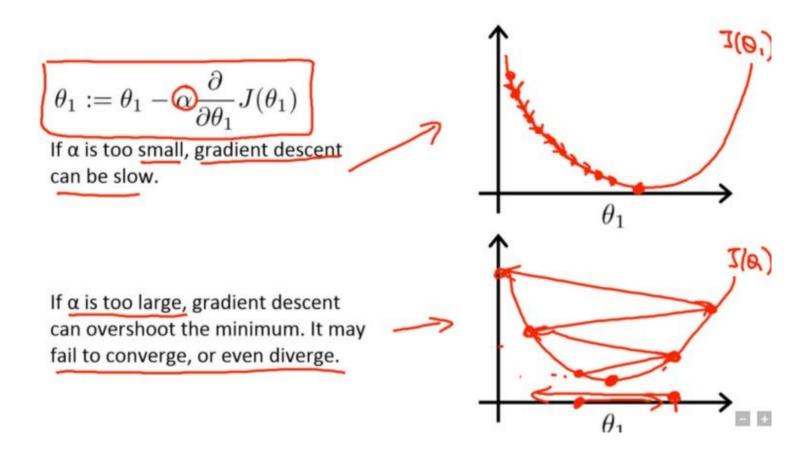



Source: Andrew Ng's lecture notes from Coursera

Some of the existing approaches for choosing the right LR



- Trying out different learning rates for a problem.
- Grid-searching/Random-searching.
- Adaptive Learning Rates / Learning Rate Schedules.

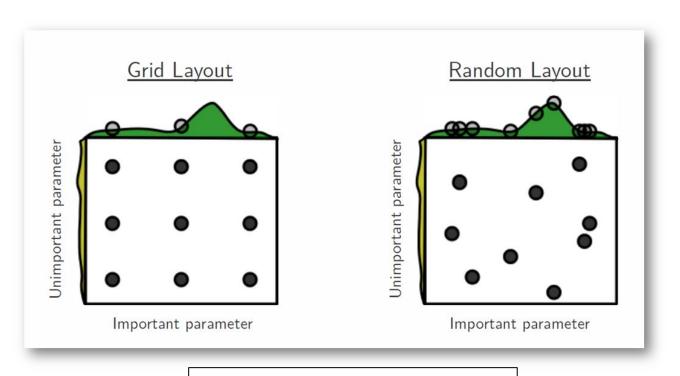

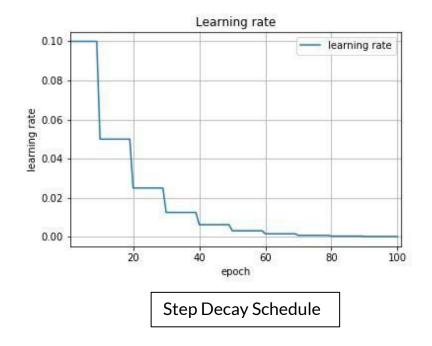

Grid and Random layout of parameters

Problems with these approaches




- Computationally costly (typically happens with grid-search).
- Gives no early clue if at all the result would get better (happens with both earlier the approaches).

Cyclical Learning Rates*



Proposed by Leslie N. Smith in his paper entitled "Cyclical Learning Rates for Training Neural Networks" in 2015.

• The idea is to simply keep increasing the learning rate from a very small value, **until the loss stops** decreasing.

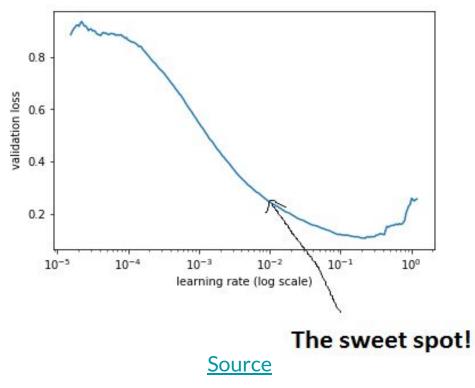


^{*} Cyclical Learning Rates for Training Neural Networks - Leslie N. Smith


How is Cyclical Learning Rate (CLR) systematic?



- The main idea behind CLR is varying learning rates between min and max values.
- LR_Range_Test() is conducted for fixing the min and max values of learning rate.

• One step of increasing learning rate.

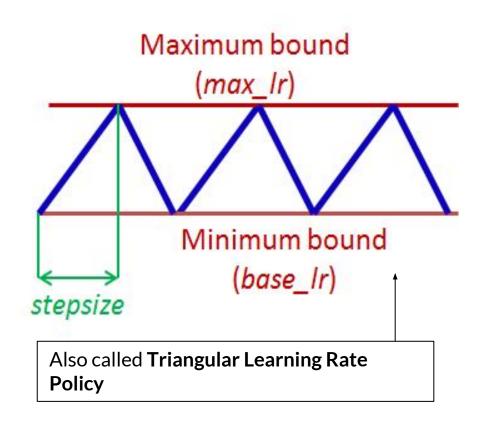

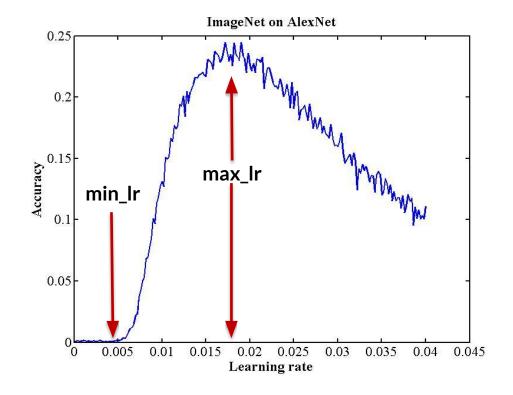


Source: <u>Cyclical Learning Rates for Training Neural Networks</u> – Leslie N. Smith

Choosing max_Ir and min_Ir



- Run the model for several epochs while letting the learning rate increase linearly (use triangular learning rate policy) between low and high learning rate values.
- Next, plot the accuracy versus learning rate curve.
- Note the learning rate value when the accuracy starts to increase and when the accuracy slows, becomes ragged, or starts to fall. These two learning rates are good choices for defining the range of the learning rates.

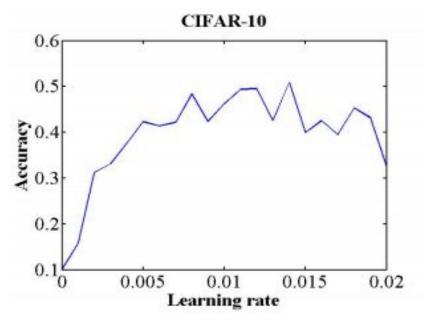

Source: Cyclical Learning Rates for Training Neural Networks - Leslie N. Smith

Popular CLR implementations in Python






As a Keras callback



As Ir find() method

Some amazing results shown by CLR



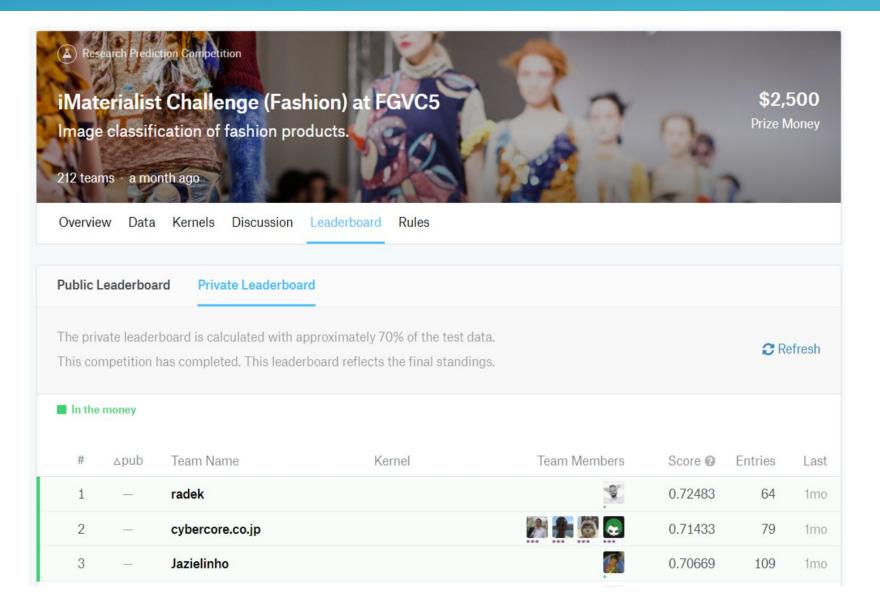

Some amazing results shown by CLR (contd.)



Image Classification on CIFAR10

Training Time §

All Submissions

Objective: Time taken to train an image classification model to a test accuracy of 94% or greater on CIFAR10.

Rank	Time to 94% Accuracy	Model	Framework	Hardware
1 Apr 2018	0:02:54	Custom Wide Resnet fast.ai + students team: Jeremy Howard, Andrew Shaw, Brett Koonce, Sylvain Gugger source	fastai / pytorch	8 * V100 (AWS p3.16xlarge)
2 Apr 2018	0:05:41	Resnet18 + minor modifications bkj source	pytorch 0.3.1.post2	V100 (AWS p3.2xlarge)
3 Apr 2018	0:06:45	Custom Wide Resnet fast.ai + students team: Jeremy Howard, Andrew Shaw, Brett Koonce, Sylvain Gugger source	fastai / pytorch	Paperspace Volta (V100)

Training Cost §



Objective: Total cost for public cloud instances to train an image classification model to a test accuracy of 94% or greater on CIFAR10.

Rank	Cost (USD)	Model	Framework	Hardware
1 Apr 2018	\$0.26	Custom Wide Resnet fast.ai + students team: Jeremy Howard, Andrew Shaw, Brett Koonce, Sylvain Gugger source	fastai / pytorch	Paperspace Volta (V100)
2 Apr 2018	\$0.29	Resnet18 + minor modifications bkj source	pytorch 0.3.1.post2	V100 (AWS p3.2xlarge)
3 Apr 2018	\$1.18	Custom Wide Resnet fast.ai + students team: Jeremy Howard, Andrew Shaw, Brett Koonce, Sylvain Gugger source	fastai / pytorch	8 * V100 (AWS p3.16xlarge)

DAWNBench Challenge Leaderboard and Leader's specs

Limitations of CLR



- Limited applicability.
- Seems to work only for Cifar-10 and resnets.
- But definitely provides a more systematic way for choosing learning rate than the earlier approaches.

Notable enhancements inspired by CLR



- Stochastic Gradient Descent with Restarts.
- Differential Learning Rates.



Cyclical Learning Rates for Training Neural Networks

Leslie N. Smith
U.S. Naval Research Laboratory, Code 5514
4555 Overlook Ave., SW., Washington, D.C. 20375

leslie.smith@nrl.navy.mil

Original CLR Paper



Introduction to Cyclical Learning Rates

Learn what cyclical learning rate policy is and how it can improve the training of a neural network.

DataCamp tutorial covering CLR

Images	Add files via upload	2 days ago
pycache	Add files via upload	2 days ago
DataHack_Summit_2018.pdf	Add files via upload	2 days ago
■ Introduction to Cyclical Learning Rates for training Neural Nets.ipynb	fixes	4 minutes ago
LICENSE	Initial commit	2 days ago
README.md	Update README.md	2 days ago
clr_callback.py	Add files via upload	2 days ago
clr_callback_tests.ipynb	Add files via upload	2 days ago

Slides available on my Github (Username: sayakpaul)

