



JOIN CSV AND SQL TABLE IN DATAFLOW AND REMOVE UNNECESSARY COLUMN AND RENAME AND SPLIT DATA INTO MULTIPLE STREAMS

Open Dataflow in Azure synapse, and give the compute size as small

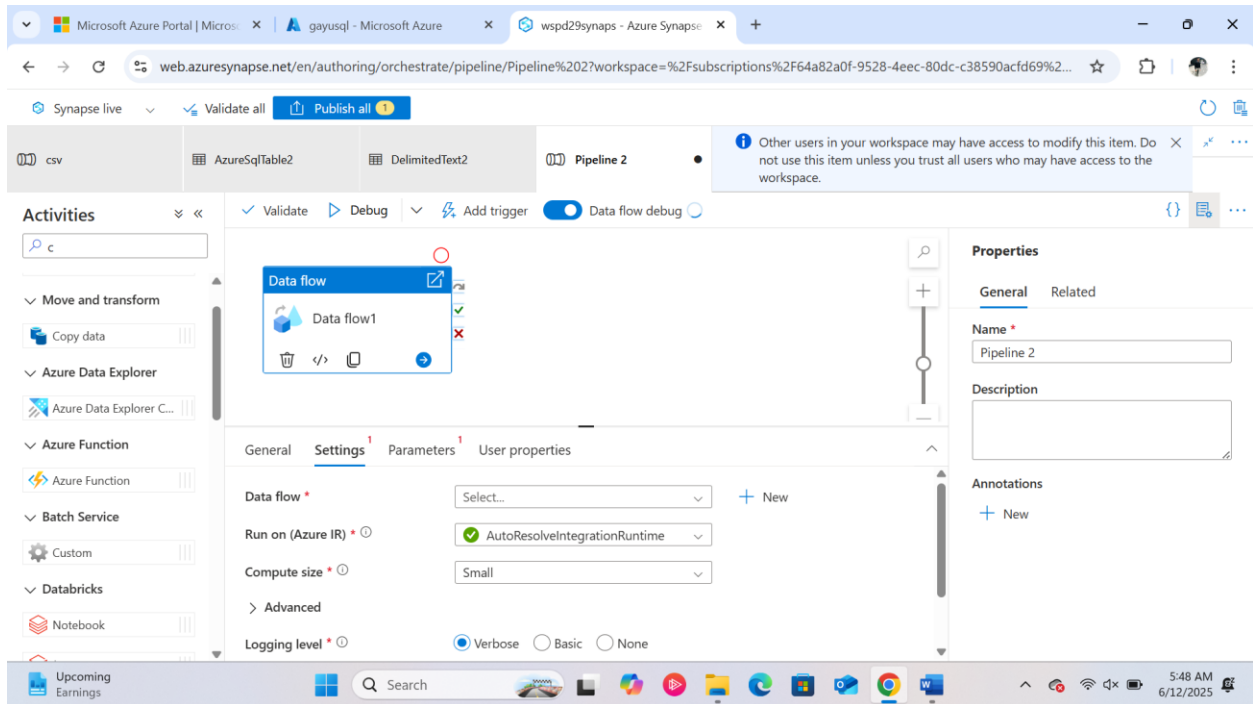


First, we are taking csv file, and giving Inline dataset type as Delimited text and select the linked services

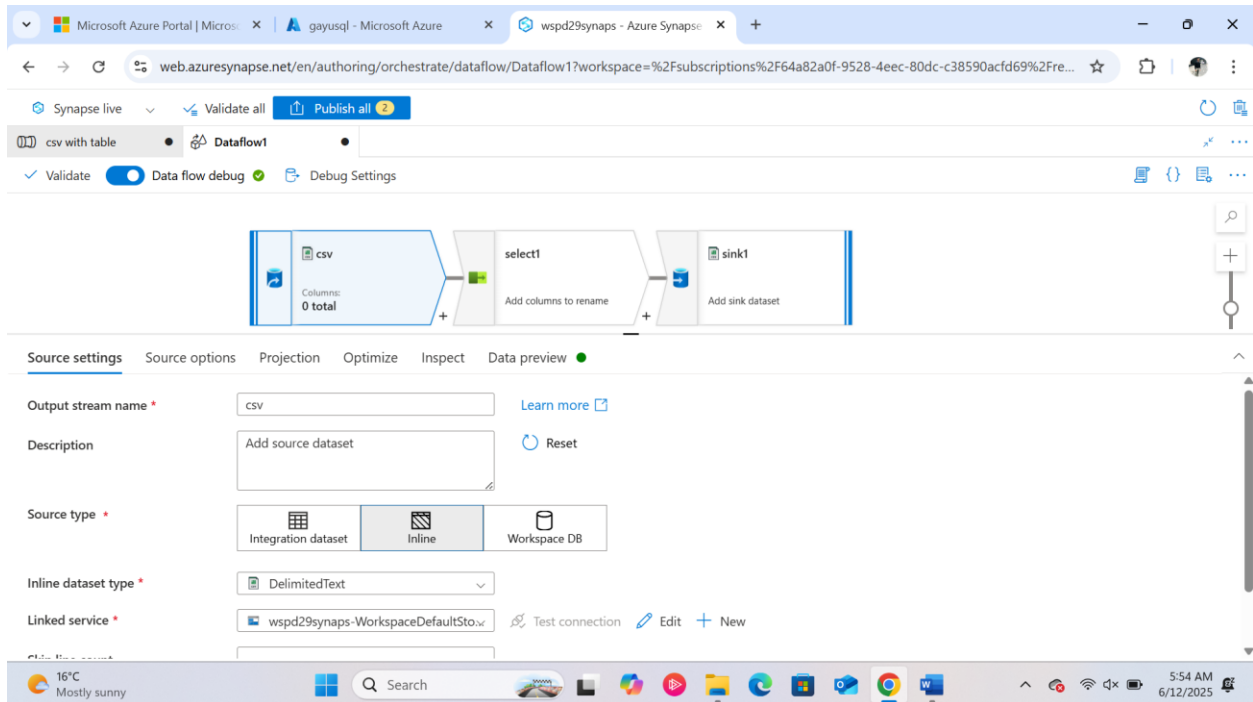


JOIN CSV AND SQL TABLE IN DATAFLOW AND REMOVE UNNECESSARY COLUMN AND RENAME AND SPLIT DATA INTO MULTIPLE STREAMS

Now, under source option we are browsing the path of csv file

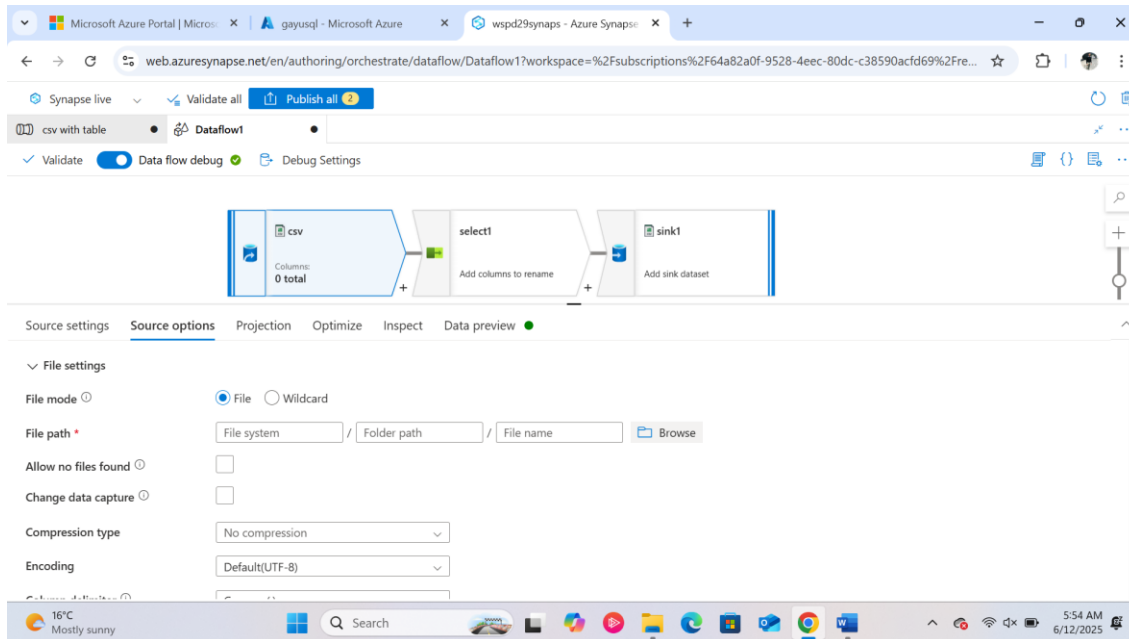

Now, under the projection click on import schema

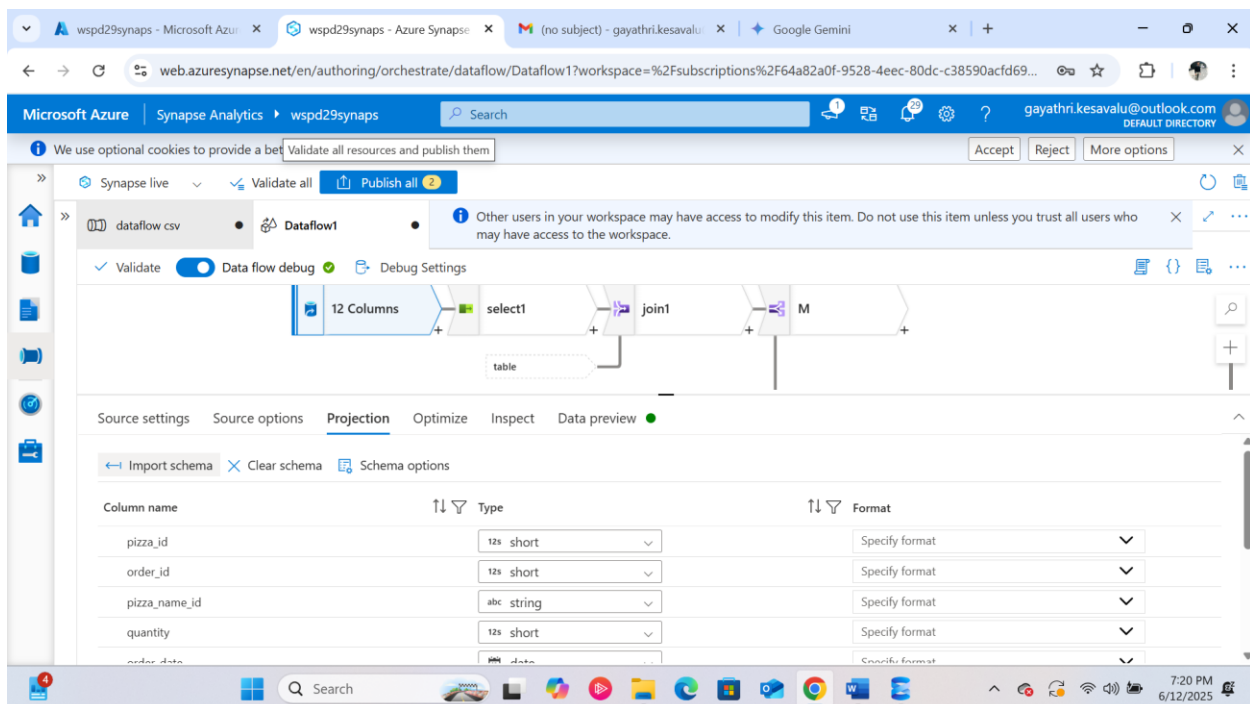

JOIN CSV AND SQL TABLE IN DATAFLOW AND REMOVE UNNECESSARY COLUMN AND RENAME AND SPLIT DATA INTO MULTIPLE STREAMS

Click on data preview

Microsoft Azure | Synapse Analytics | wspd29synaps

Validate all resources and publish them

Validate Data flow debug Debug Settings

Source settings Source options Projection Optimize Inspect **Data preview**

Number of rows + INSERT 100 UPDATE 0 DELETE 0 UPSERT 0

Refresh Typecast Change the type of a column lifted Statistics Remove Export to CSV

↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓	↑↓
pizza_id	order_id	pizza_name_id	quantity	order_date	order_time	unit_price	total_price	pizza_size
1	1	hawaiian_m	1	NULL	11:38:36	13.25	13.25	M
2	2	classic_dlx_m	1	NULL	11:57:40	16.0	16.0	M
3	2	five_cheese_l	1	NULL	11:57:40	18.5	18.5	L

In select setting, we can select the table and delete the table

Microsoft Azure | Synapse Analytics | wspd29synaps

Validate all resources and publish them

Validate Data flow debug Debug Settings


Select settings Optimize Inspect Data preview

csv's column Name as

checkbox	column	checkbox	Name as	checkbox	checkbox
☐	quantity	☐	quantity	☐	☐
☐	order_date	☐	order_date	☐	☐
☐	order_time	☐	order_time	☐	☐
☐	unit_price	☐	unit_price	☐	☐
☒	total_price	☐	total_price	☐	☐
☐	pizza_size	☐	pizza_size	☐	☐
☐	pizza_category	☐	pizza_category	☐	☐

JOIN CSV AND SQL TABLE IN DATAFLOW AND REMOVE UNNECESSARY COLUMN AND RENAME AND SPLIT DATA INTO MULTIPLE STREAMS


We can also rename the table

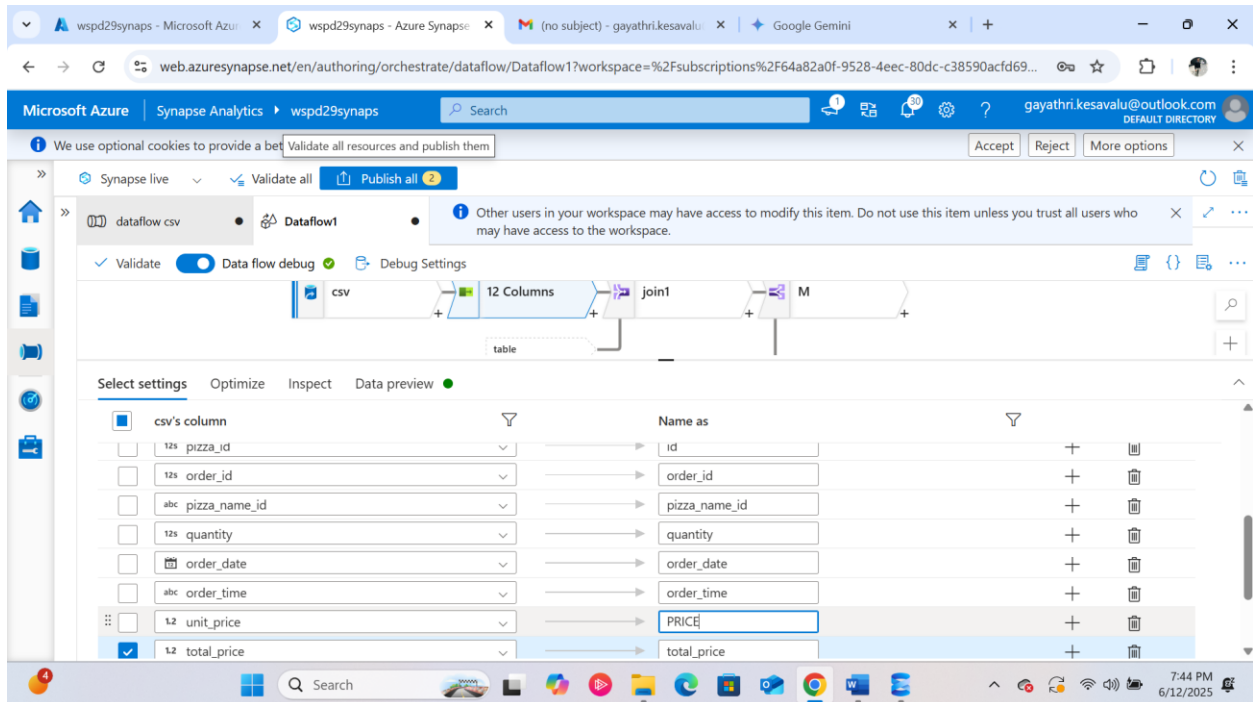

The screenshot shows the Microsoft Azure Synapse Analytics Dataflow1 interface. The 'Select settings' tab is active, displaying a list of columns from a CSV file and their corresponding names in the dataflow. The columns are:

csv's column	Name as
12s pizza_id	id
12s order_id	order_id
abc pizza_name_id	pizza_name_id
12s quantity	quantity
abc order_date	order_date
abc order_time	order_time
1.2 unit_price	PRICE
1.2 total_price	total_price

In data preview in select we can see all the updated column after deleting.

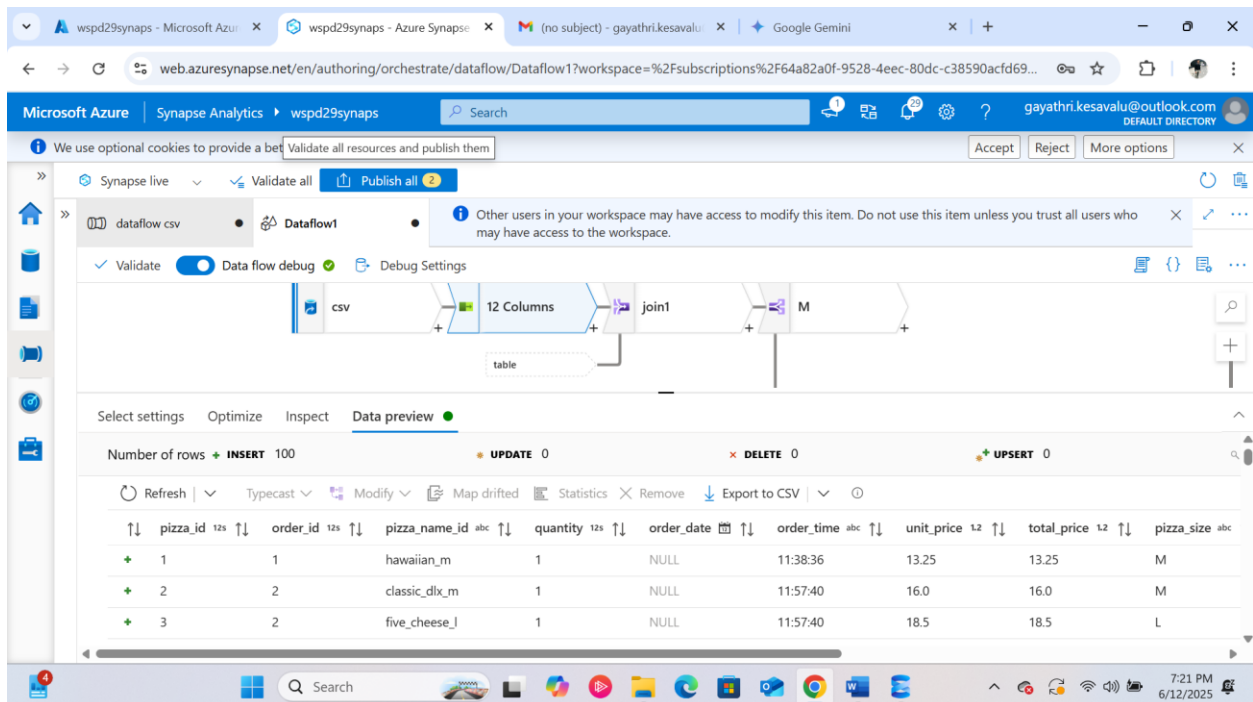


The screenshot shows the Microsoft Azure Synapse Analytics Dataflow1 interface. The 'Data preview' tab is active, displaying a table of data. The table has the following columns:

↑↓ pizza_id 12s	↑↓ order_id 12s	↑↓ pizza_name_id abc	↑↓ quantity 12s	↑↓ order_date	↑↓ order_time abc	↑↓ unit_price 1.2	↑↓ total_price 1.2	↑↓ pizza_size abc
1	1	hawaiian_m	1	NULL	11:38:36	13.25	13.25	M
2	2	classic_dlx_m	1	NULL	11:57:40	16.0	16.0	M
3	2	five_cheese_l	1	NULL	11:57:40	18.5	18.5	L

JOIN CSV AND SQL TABLE IN DATAFLOW AND REMOVE UNNECESSARY COLUMN AND RENAME AND SPLIT DATA INTO MULTIPLE STREAMS

Now, in table select the inline and Azure sql database and give the azure sql database 2 and test the connection

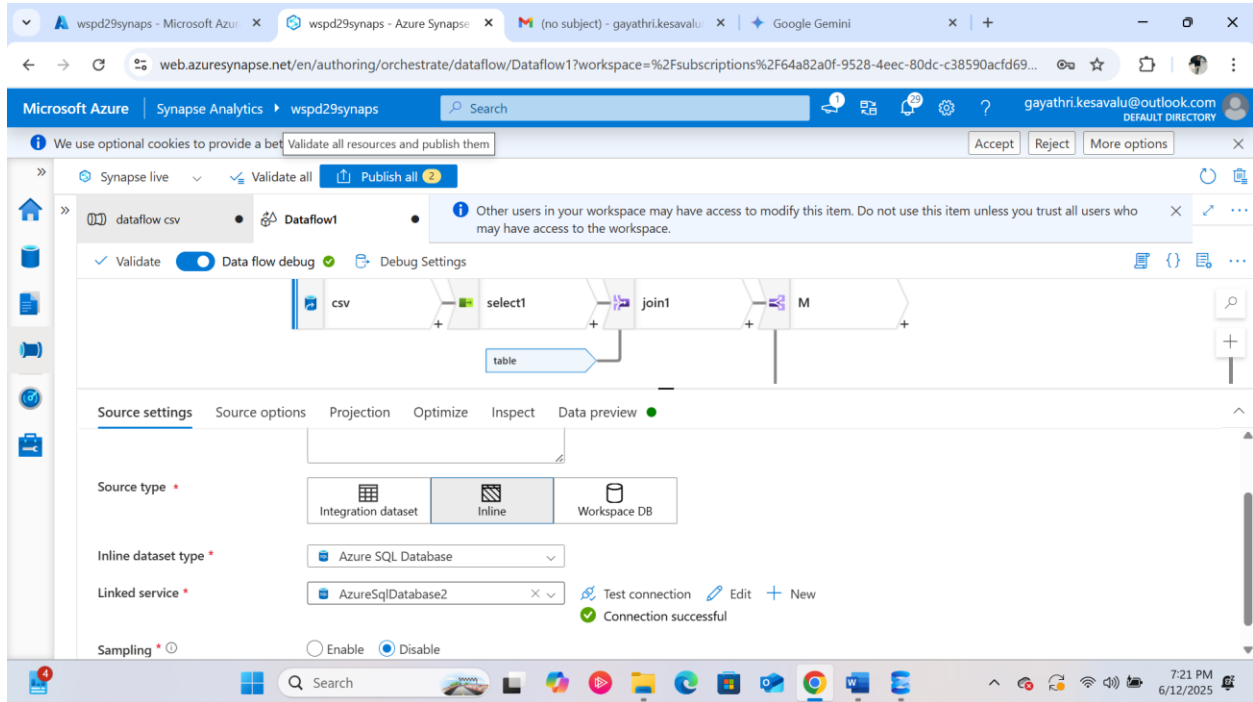


The screenshot shows the Microsoft Azure Synapse Analytics Dataflow1 interface. The 'Source settings' tab is active, displaying the following configuration:

- Source type:** Integration dataset
- Inline dataset type:** Azure SQL Database
- Linked service:** AzureSqlDatabase2
- Test connection:** Connection successful
- Sampling:** Disable

The 'Data preview' tab shows a table with columns 'EMPID' and 'EMPNAME'.

Under the source option, click on query, give the expression indicated below

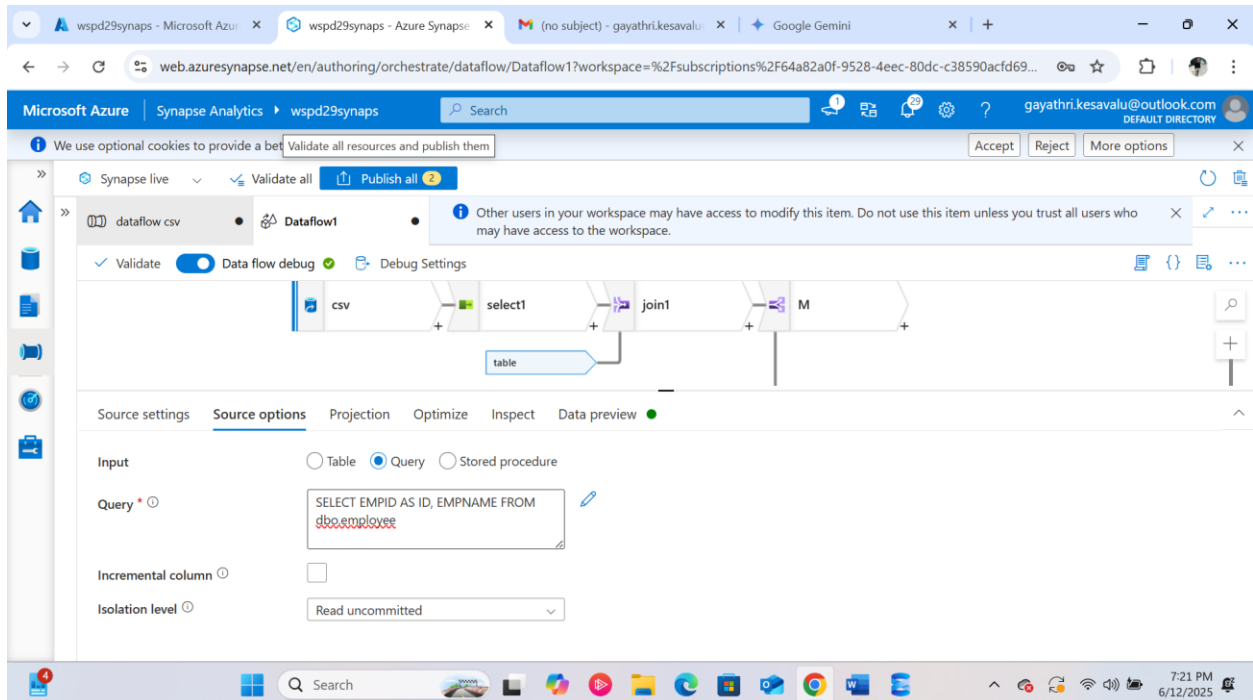


The screenshot shows the Microsoft Azure Synapse Analytics Dataflow1 interface. The 'Source options' tab is active, displaying the following configuration:

- Input:** Query
- Query:** SELECT EMPID AS ID, EMPNAME FROM dbo.employee
- Incremental column:** (empty)
- Isolation level:** Read uncommitted


JOIN CSV AND SQL TABLE IN DATAFLOW AND REMOVE UNNECESSARY COLUMN AND RENAME AND SPLIT DATA INTO MULTIPLE STREAMS

Under projection, click on import schema, it is imported successfully

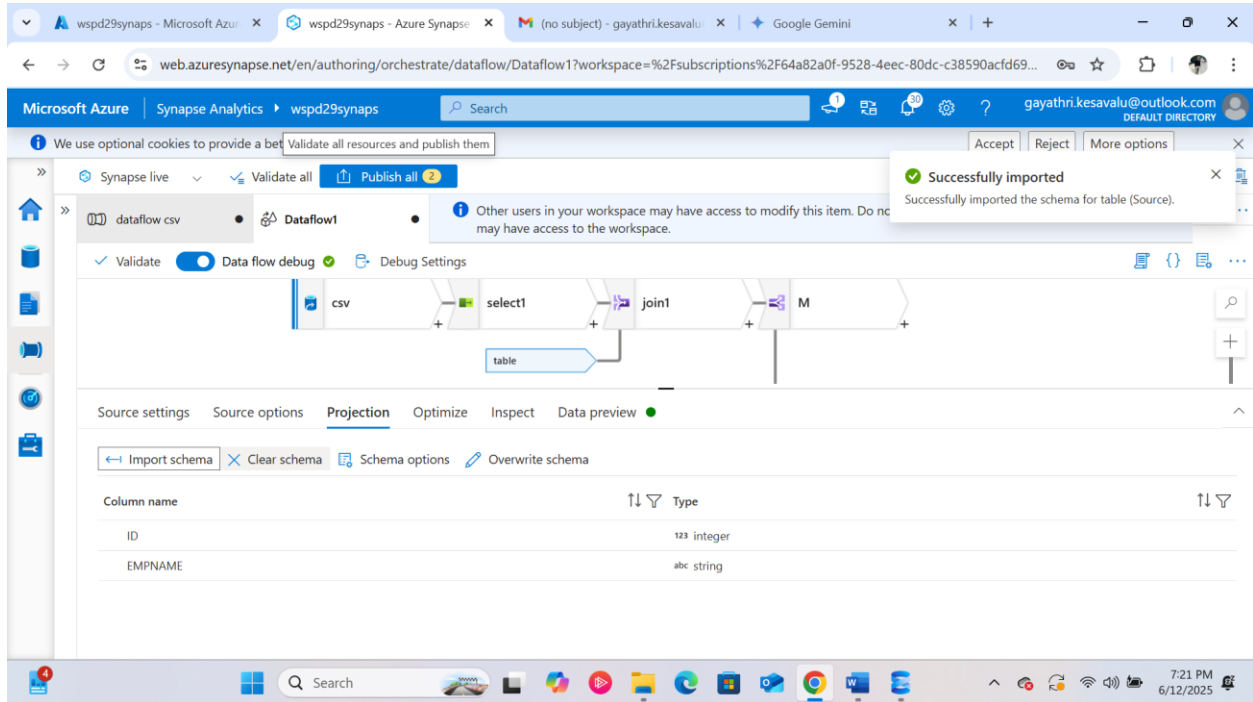

The screenshot shows the Microsoft Azure Synapse Analytics interface for a Dataflow1 workspace. The 'Projection' tab is active, displaying a table schema with two columns: 'ID' (integer) and 'EMPNAME' (string). A notification at the top right states 'Successfully imported' and 'Successfully imported the schema for table (Source)'. The workflow diagram above shows a 'csv' source connected to a 'select1' node, which is then joined with a 'table' source at a 'join1' node. The output is split into multiple streams labeled 'M'.

Click on data preview, all the column in table is visible.

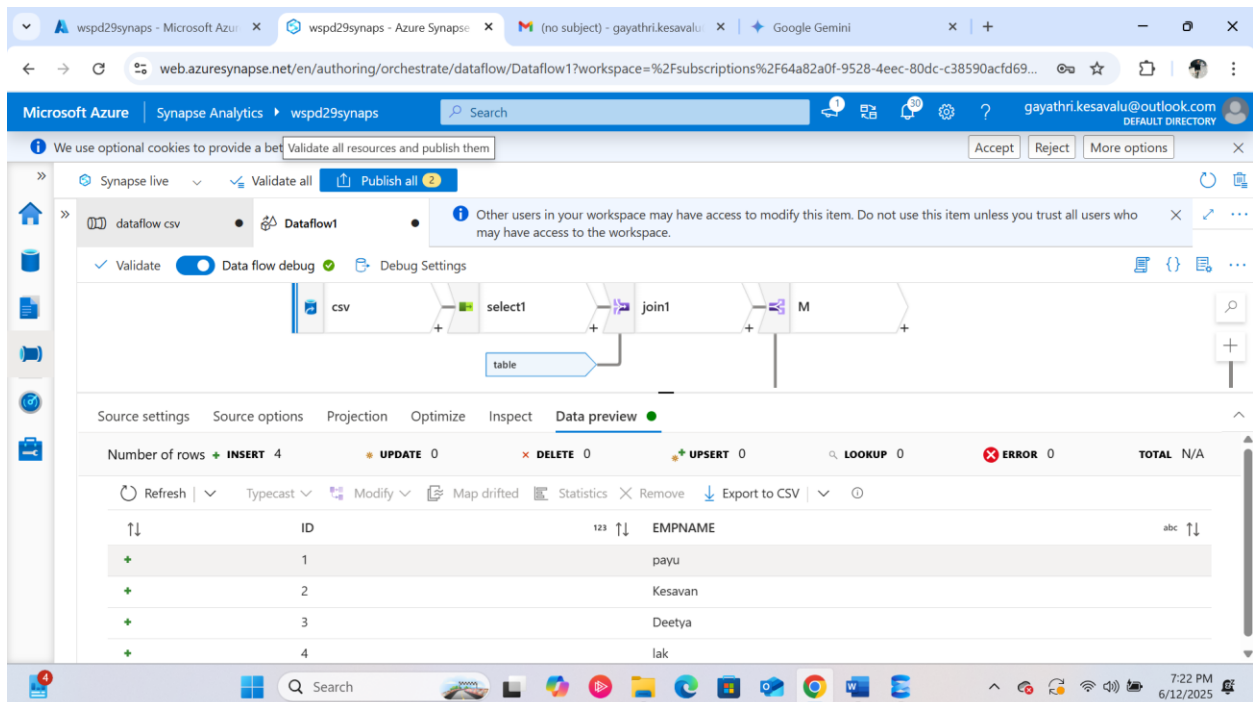

The screenshot shows the same Microsoft Azure Synapse Analytics interface, but now the 'Data preview' tab is active. It displays a table with 4 rows of data. The columns are 'ID' (integer) and 'EMPNAME' (string). The data rows are: (1, 'payu'), (2, 'Kesavan'), (3, 'Deetya'), and (4, 'lak'). The interface also shows statistics for the data preview, including 'Number of rows', 'INSERT', 'UPDATE', 'DELETE', 'UPSERT', 'LOOKUP', 'ERROR', and 'TOTAL'.

ID	EMPNAME
1	payu
2	Kesavan
3	Deetya
4	lak

JOIN CSV AND SQL TABLE IN DATAFLOW AND REMOVE UNNECESSARY COLUMN AND RENAME AND SPLIT DATA INTO MULTIPLE STREAMS

Click on left join and click on condition id=ID

The screenshot shows the Microsoft Azure Synapse Analytics interface for a Dataflow named 'Dataflow1'. The 'Join settings' tab is selected, displaying a 'Left outer' join configuration. The join condition is set to 'id == ID'. The 'Data preview' tab is also visible, showing a table with 14 columns.

Join settings

Join type *

Full outer Inner **Left outer** Right outer Custom (cross)

Use fuzzy matching ☐

Join conditions *

Left: select's column Right: table's column

12s id == 12s ID

Now, click on Data preview it is successfully loaded.

The screenshot shows the Microsoft Azure Synapse Analytics interface for a Dataflow named 'Dataflow1'. The 'Data preview' tab is selected, displaying a table with 14 columns. The data is successfully loaded and displayed.

Join settings Optimize Inspect **Data preview**

Refresh Typecast Modify Map drifted Statistics Remove Export to CSV

id	order_id	pizza_name_id	quantity	order_date	order_time	unit_price	total_price	pizza_size
1	1	hawaiian_m	1	NULL	11:38:36	13.25	13.25	M
2	2	classic_dlx_m	1	NULL	11:57:40	16.0	16.0	M
3	2	five_cheese_l	1	NULL	11:57:40	18.5	18.5	L
4	2	ital_supr_l	1	NULL	11:57:40	20.75	20.75	L
5	2	mavirana_m	1	NULL	11:57:40	16.0	16.0	M

JOIN CSV AND SQL TABLE IN DATAFLOW AND REMOVE UNNECESSARY COLUMN AND RENAME AND SPLIT DATA INTO MULTIPLE STREAMS

Give split condition as M equals(pizza_size,'M') and all others

The screenshot shows the 'Conditional split settings' for a dataflow named 'Dataflow1'. The flow starts with a 'csv' source, followed by a 'select1' transformation, then a 'join1' transformation. The output is split into two streams: 'M' and 'allothers'. The split condition is set to 'equals(pizza_size, 'M')'.

Conditional split settings

- Optimize
- Inspect
- Data preview

pizza_size groups, based on columns {'1'}

Incoming stream *
join1

Split on
☒ First matching condition ☐ All matching conditions

Split condition

Stream names	Condition
M	equals(pizza_size, 'M')
allothers	Rows that do not meet any condition will use this output stream

Output stream, if we click on M all the medium size pizza came successfully.

The screenshot shows the 'Data preview' for the 'M' output stream. The preview shows a table with columns: id, order_id, pizza_name_id, quantity, order_date, order_time, unit_price, total_price, and pizza_size. The data is filtered to show only medium-sized pizzas (pizza_size = M).

Number of rows + INSERT 100 UPDATE 0 DELETE 0 UPSERT 0

Refresh | Statistics | Export to CSV

Output stream
M

id	order_id	pizza_name_id	quantity	order_date	order_time	unit_price	total_price	pizza_size
1	1	hawaiian_m	1	NULL	11:38:36	13.25	13.25	M
2	2	classic_dlx_m	1	NULL	11:57:40	16.0	16.0	M
5	2	mexicana_m	1	NULL	11:57:40	16.0	16.0	M
7	3	ital_suur_m	1	NULL	12:12:28	16.5	16.5	M

JOIN CSV AND SQL TABLE IN DATAFLOW AND REMOVE UNNECESSARY COLUMN AND RENAME AND SPLIT DATA INTO MULTIPLE STREAMS

Flow diagram

The screenshot shows the Azure Synapse Dataflow1 interface. The flow diagram consists of the following steps:

- csv**: A data source connector.
- select1**: A transformation step.
- join1**: A join transformation step.
- M**: A transformation step.

The output of the flow is a stream with 14 columns. The data preview shows the following table:

id	order_id	pizza_name_id	quantity	order_date	order_time	unit_price	total_price	pizza_size
3	2	five_cheese_l	1	NULL	11:57:40	18.5	18.5	L


Output stream, if we click on all others, all size pizza came successfully.

The screenshot shows the Azure Synapse Dataflow1 interface with the output stream selected. The data preview shows the following table:


id	order_id	pizza_name_id	quantity	order_date	order_time	unit_price	total_price	pizza_size
1	1	hawaiian m	1	NULL	11:38:36	13.25	13.25	M
2	2	classic dlx m	1	NULL	11:57:40	16.0	16.0	M
5	2	mexicana m	1	NULL	11:57:40	16.0	16.0	M
7	3	ital supr m	1	NULL	12:12:28	16.5	16.5	M

JOIN CSV AND SQL TABLE IN DATAFLOW AND REMOVE UNNECESSARY COLUMN AND RENAME AND SPLIT DATA INTO MULTIPLE STREAMS

Now, giving sink data for both M and all others to store data.

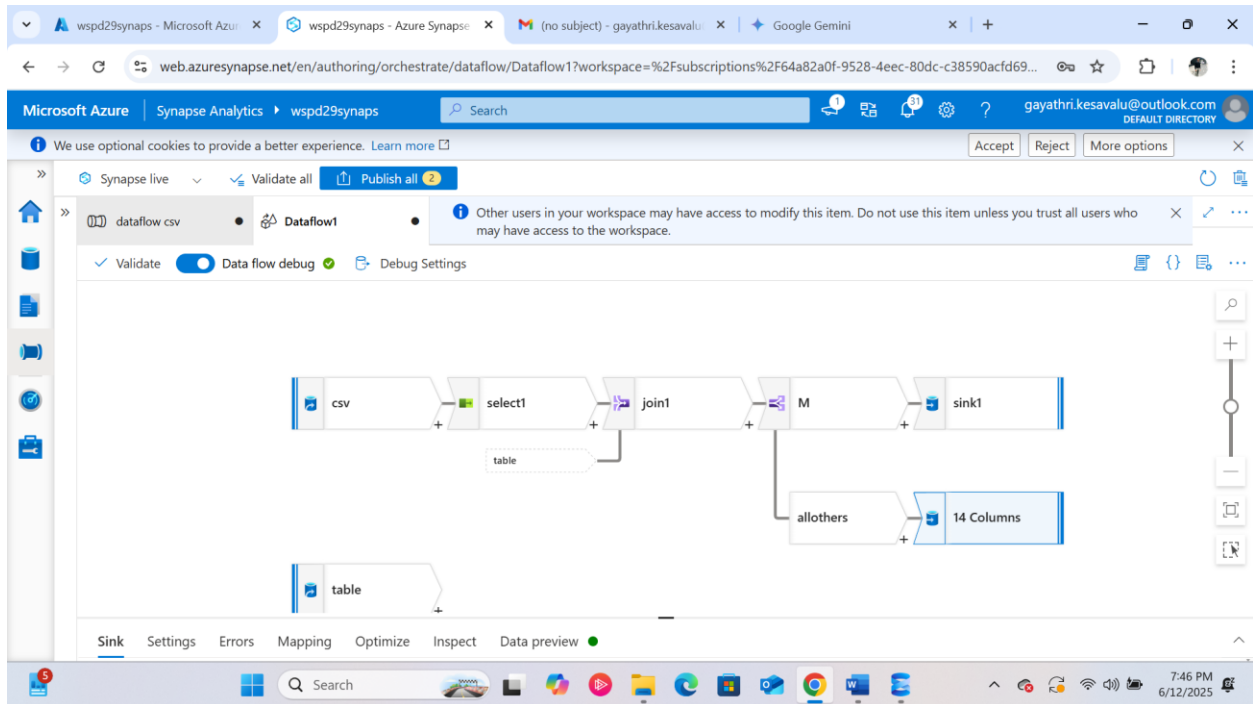

In sink, give Delimited text and synapse name.

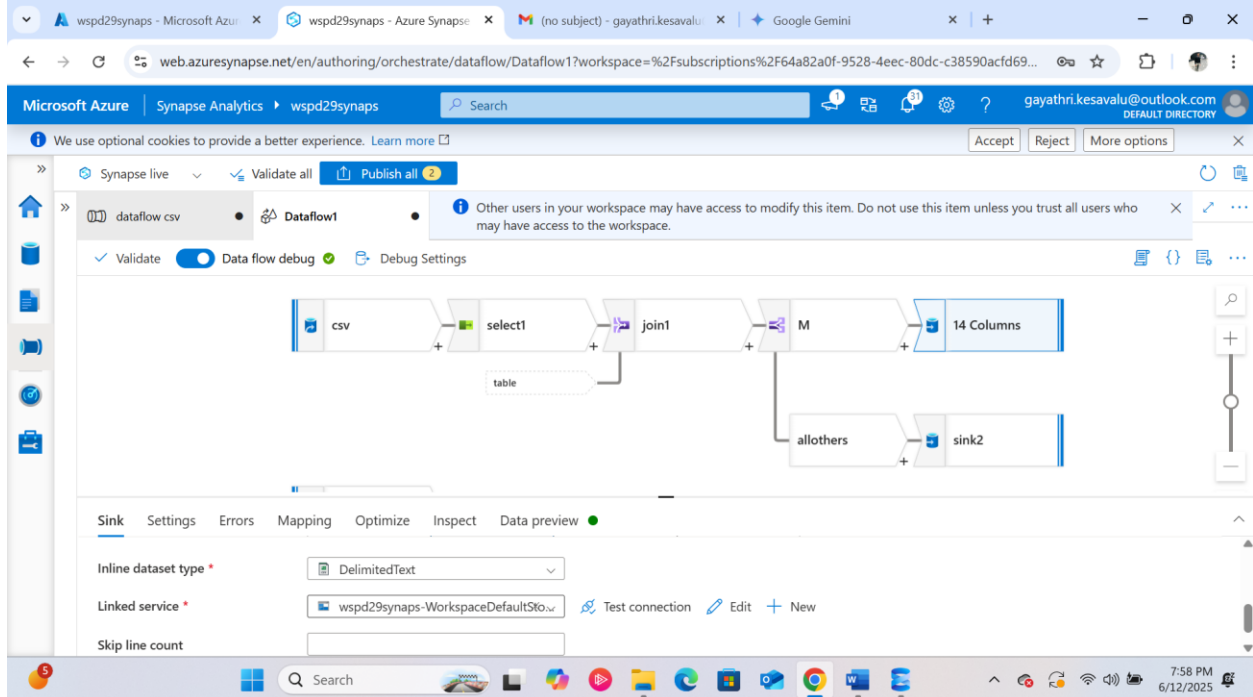

JOIN CSV AND SQL TABLE IN DATAFLOW AND REMOVE UNNECESSARY COLUMN AND RENAME AND SPLIT DATA INTO MULTIPLE STREAMS

Folder path of sink, as silver/employee/M

The screenshot shows the Microsoft Azure Synapse Analytics Dataflow1 workspace. The dataflow graph consists of the following components: a 'csv' source, a 'select1' transformation, a 'join1' transformation, a mapping transformation 'M', a '14 Columns' sink, and an 'allothers' sink connected to 'sink2'. The 'Sink' settings panel is open, showing the 'Folder path' as 'gayuadls / silver/employee/M', 'Compression type' as 'No compression', and 'Encoding' as 'Default(UTF-8)'.

Enable automapping

The screenshot shows the same dataflow workspace, but the 'Mapping' tab is selected. The 'Options' section has 'Skip duplicate input columns' and 'Skip duplicate output columns' checked. The 'Auto mapping' checkbox is also checked. Below the options, it says '1 mappings: All inputs mapped' and 'All inputs mapped by name including drifted columns'.

JOIN CSV AND SQL TABLE IN DATAFLOW AND REMOVE UNNECESSARY COLUMN AND RENAME AND SPLIT DATA INTO MULTIPLE STREAMS

Folder path of sink, as silver/employee/allothers

The screenshot shows the Microsoft Azure Synapse Analytics Dataflow1 workspace. The dataflow graph consists of a 'csv' source, a 'select1' transformation, a 'join1' transformation, a 'M' transformation, and a 'sink1' sink. A 'table' source is also connected to the 'join1' transformation. The 'sink1' sink is configured with a folder path of 'er/employee/allothers' and a name of '14 Columns'. The 'Data preview' tab is selected, showing a table with 14 columns and 16 rows of data.

id	order_id	product_name	quantity	order_date	order_time	price	total_price	product_size	product_color
3	2	five cheese l	1	NULL	11:57:40	18.5	18.5	L	Veegie
4	2	ital supr l	1	NULL	11:57:40	20.75	20.75	L	Supreme
6	2	thai ckn l	1	NULL	11:57:40	20.75	20.75	L	Chicken
8	3	prsc arqla l	1	NULL	12:12:28	20.75	20.75	L	Supreme
11	6	bbq ckn s	1	NULL	12:29:36	12.75	12.75	S	Chicken
12	6	the qreek s	1	NULL	12:29:36	12.0	12.0	S	Classic
13	7	spinach supr s	1	NULL	12:50:37	12.5	12.5	S	Supreme
14	8	spinach supr s	1	NULL	12:51:37	12.5	12.5	S	Supreme
15	9	classic dlx s	1	NULL	12:52:01	12.0	12.0	S	Classic
16	9	green garden s	1	NULL	12:52:01	12.0	12.0	S	Veegie

Click on data preview, it is successful

The screenshot shows the Microsoft Azure Synapse Analytics Dataflow1 workspace with the 'Data preview' tab selected. The data preview shows a table with 14 columns and 16 rows of data.

id	order_id	product_name	quantity	order_date	order_time	price	total_price	product_size	product_color
3	2	five cheese l	1	NULL	11:57:40	18.5	18.5	L	Veegie
4	2	ital supr l	1	NULL	11:57:40	20.75	20.75	L	Supreme
6	2	thai ckn l	1	NULL	11:57:40	20.75	20.75	L	Chicken
8	3	prsc arqla l	1	NULL	12:12:28	20.75	20.75	L	Supreme
11	6	bbq ckn s	1	NULL	12:29:36	12.75	12.75	S	Chicken
12	6	the qreek s	1	NULL	12:29:36	12.0	12.0	S	Classic
13	7	spinach supr s	1	NULL	12:50:37	12.5	12.5	S	Supreme
14	8	spinach supr s	1	NULL	12:51:37	12.5	12.5	S	Supreme
15	9	classic dlx s	1	NULL	12:52:01	12.0	12.0	S	Classic
16	9	green garden s	1	NULL	12:52:01	12.0	12.0	S	Veegie

JOIN CSV AND SQL TABLE IN DATAFLOW AND REMOVE UNNECESSARY COLUMN AND RENAME AND SPLIT DATA INTO MULTIPLE STREAMS

Publish it, successful

The screenshot shows the Microsoft Azure Synapse Analytics web portal. The top navigation bar includes 'Microsoft Azure', 'Synapse Analytics', and 'wspd29synaps'. The main content area displays the 'Dataflow1' pipeline in the 'Publishing completed' state. A notification banner at the top right states 'Publishing completed Successfully published'. The left sidebar shows the 'Activities' list with 'Data flow' selected. The right sidebar shows the 'Properties' tab for 'Dataflow1', with fields for 'Name' (dataflow csv) and 'Description'. The bottom status bar shows the time as 8:01 PM on 6/12/2025.

Debug is successful

The screenshot shows the Microsoft Azure Synapse Analytics web portal, displaying the 'Output' tab of a Dataflow1 pipeline run. The top navigation bar includes 'Microsoft Azure', 'Synapse Analytics', and 'wspd29synaps'. The main content area shows the 'Pipeline run ID' as '85cce925-94bb-436f-a4a3-c8058f6fc826' and the 'Pipeline status' as 'Succeeded'. The 'Output' tab displays a table with the following data:

Activity name	Activity st...	Activit...	Run start	Duration	Integration runtime	User prop...	Ac
Data flow1	✓ Succeeded	Data flow	6/12/2025, 8:01:16 PM	3m 29s	AutoResolveIntegrationRuntime (West US 3)	bbl	

The bottom status bar shows the time as 8:05 PM on 6/12/2025.

**JOIN CSV AND SQL TABLE IN DATAFLOW AND REMOVE UNNECESSARY COLUMN
AND RENAME AND SPLIT DATA INTO MULTIPLE STREAMS**