



Exercise 4

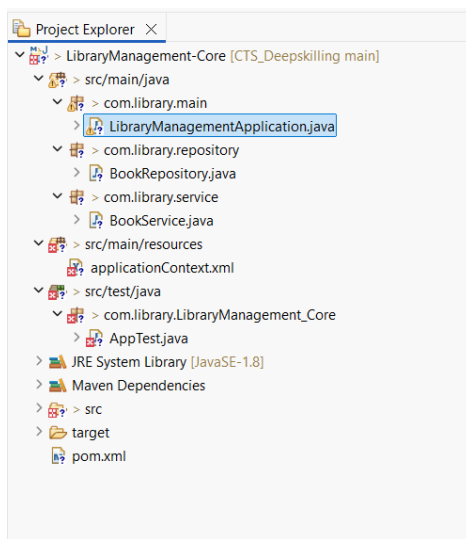


Exercise 1

```
Book Repository initialized
Book Service initialized
```


Exercise 2

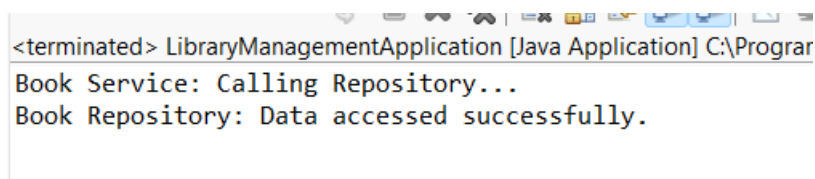

Exercise 5

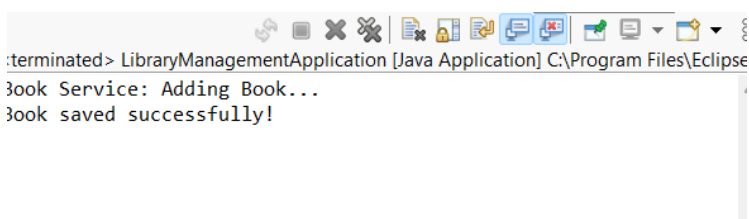

Exercise 7

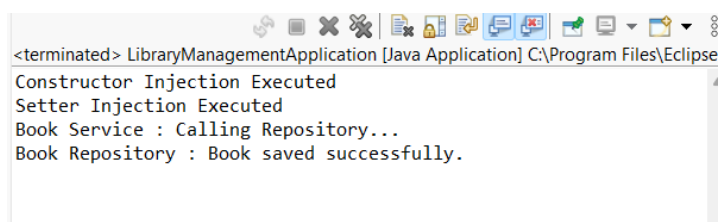

Exercise 9(Spring Boot)

```
: HHH000489: No JTA platform available (set 'hibernate.transaction.jta.platform' to enable JTA)
: Initialized JPA EntityManagerFactory for persistence unit 'default'
: spring.jpa.open-in-view is enabled by default. Therefore, database queries may be performed during view rendering.
: Tomcat started on port 8080 (http) with context path '/'
: Started LibraryManagementBootApplication in 2.893 seconds (process running for 3.307)
```

```
EntityManagerFactoryBean : Initialized JPA EntityManagerFactory for persistence unit 'default'
QueryEnhancerFactories   : Hibernate is in classpath; If applicable, HQL parser will be used.
JpaWebConfiguration      : spring.jpa.open-in-view is enabled by default. Therefore, database queries may be performed during view rendering.
soleAutoConfiguration    : H2 console available at '/h2-console'. Database available at 'jdbc:h2:mem:librarydb'
TomcatWebServer          : Tomcat started on port 8080 (http) with context path '/'
LibraryManagementBootApplication : Started LibraryManagementBootApplication in 2.437 seconds (process running for 2.809)
```

POST

http://localhost:8080/books

Send

Docs

Params

Authorization

Headers 8

Body

Scripts

Settings

raw

JSON

Schema

Beautify

```
1  {
2    "id": 1,
3    "title": "Spring Boot",
4    "author": "John"
5  }
```

Body

Cookies

Headers 5

Test Results

200

🕒

⬇️

🌐

⋮

{{ JSON

Preview

Visualize

🔍

📄

🔗

```
1  {
2    "id": 1,
3    "title": "Spring Boot",
4    "author": "John"
5  }
```

Pretty-print ☐

```
[{"id":1,"title":"Spring Boot","author":"John"}]
```