

Network Labs

Mohamed Nagy Mabrock



Figure 1: IT Lab Environment

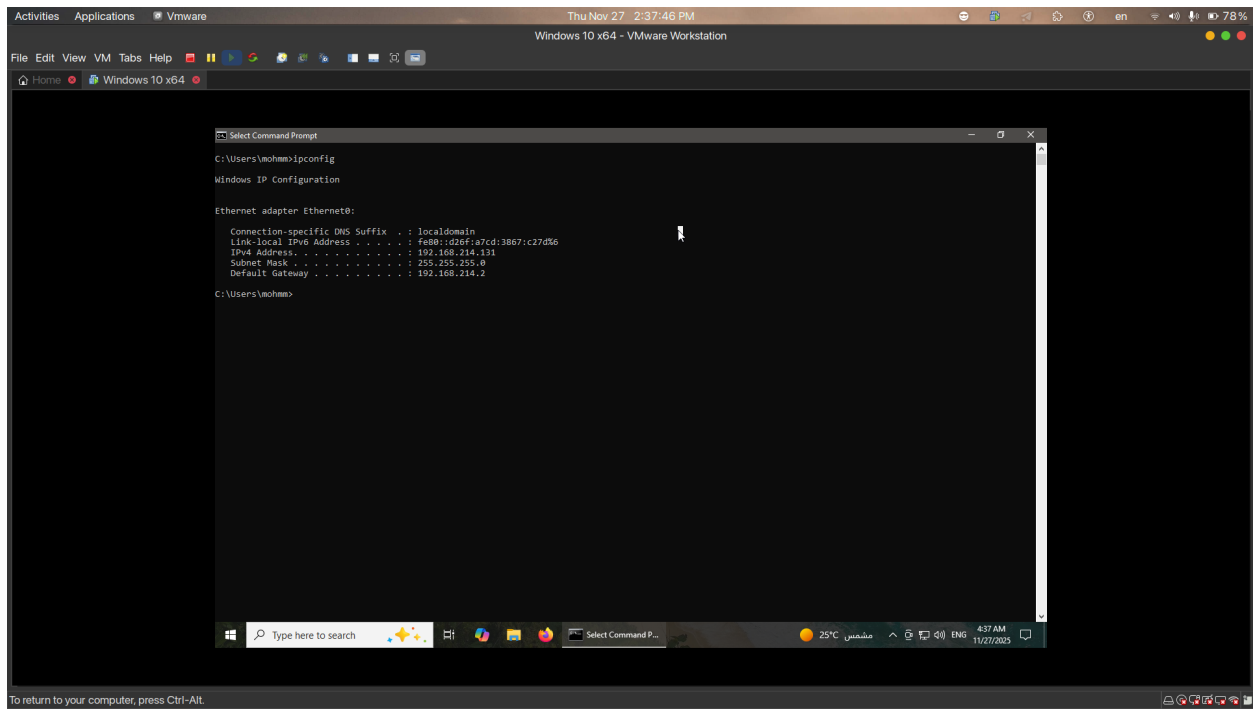


Figure 2: ipconfig

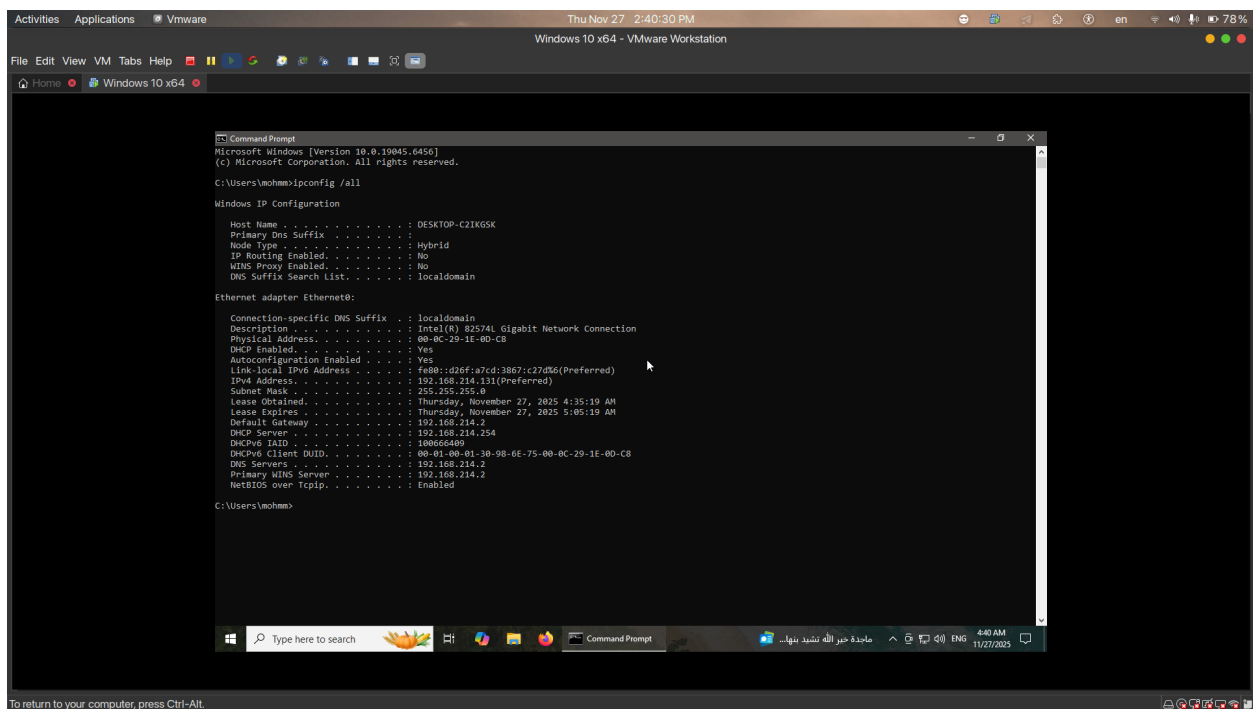


Figure 3: ipconfig /all

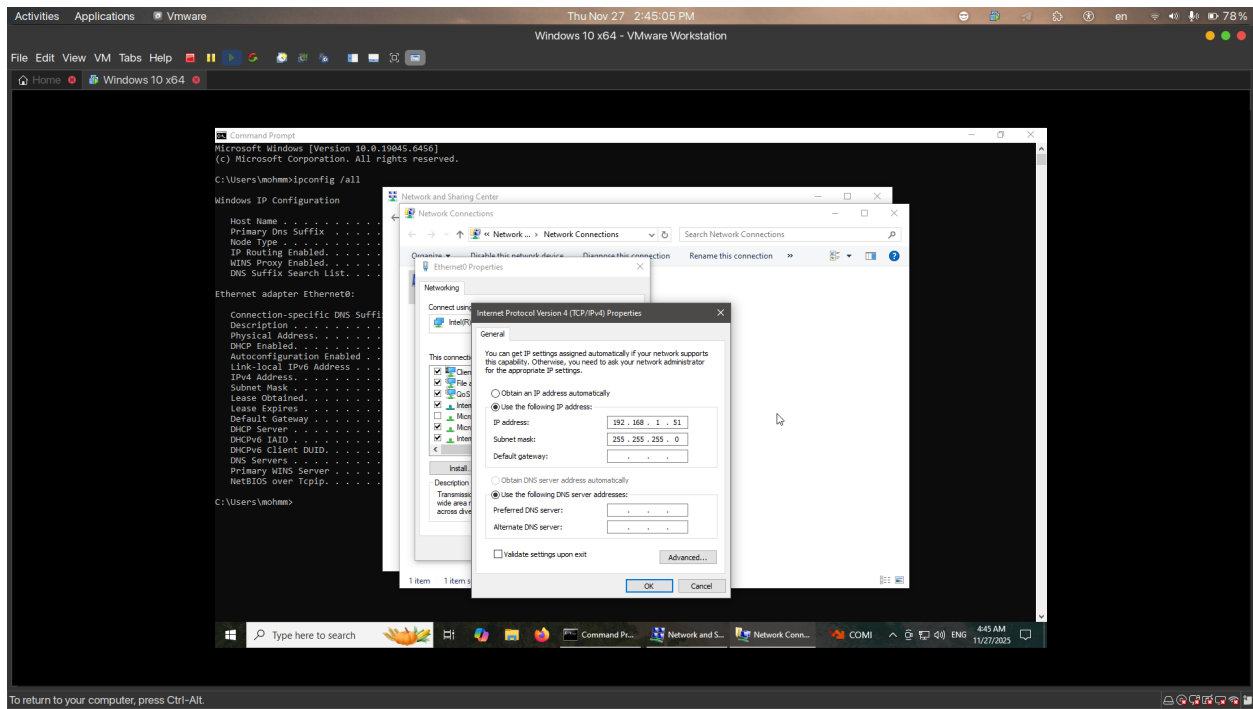


Figure 4: local ip

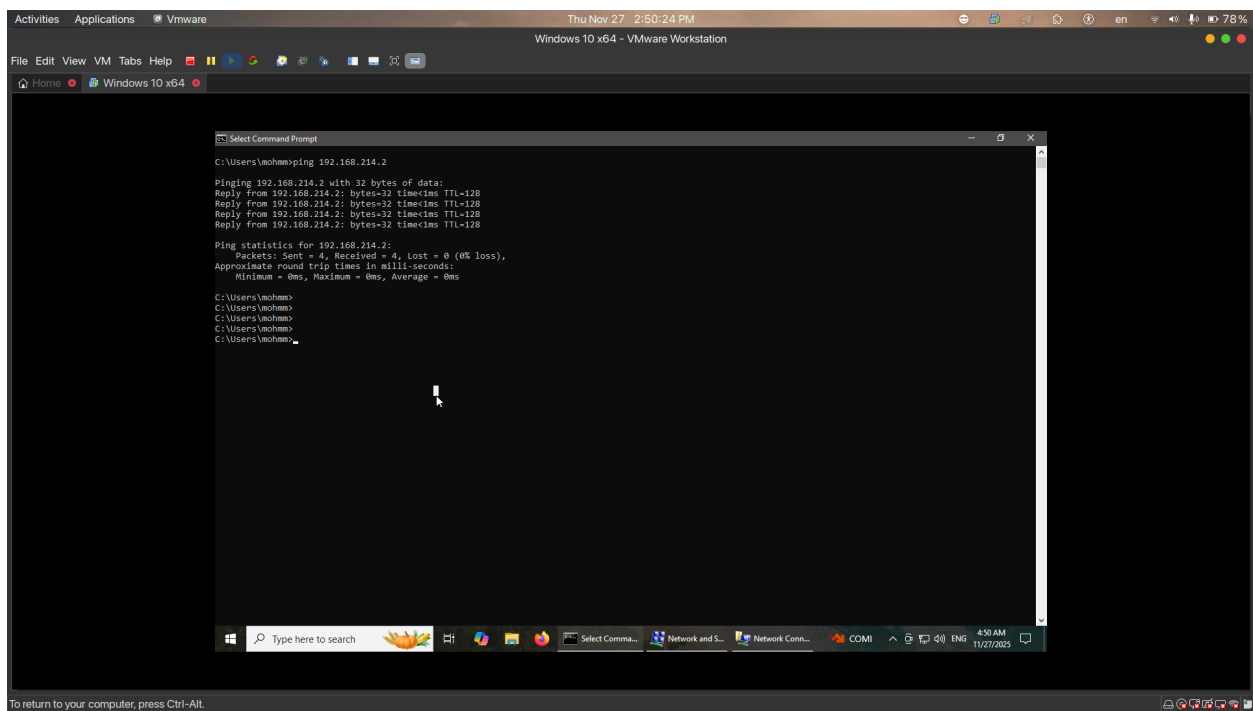


Figure 5: ping

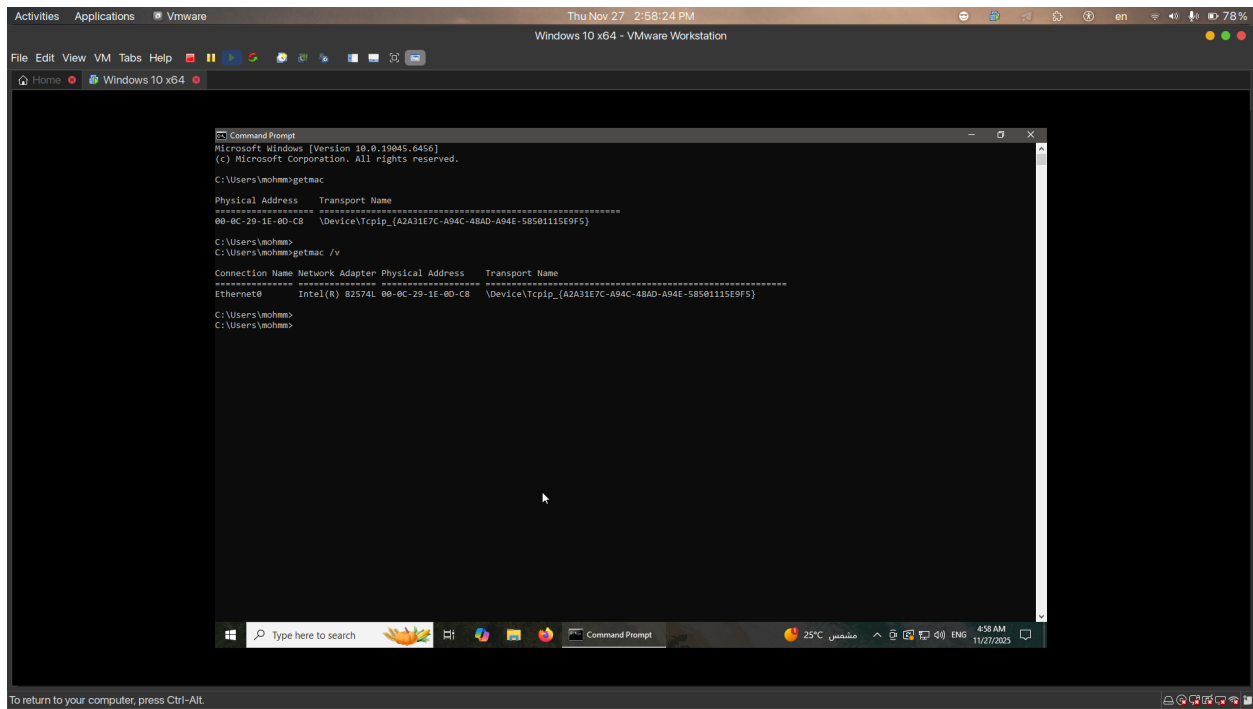


Figure 6: getmac

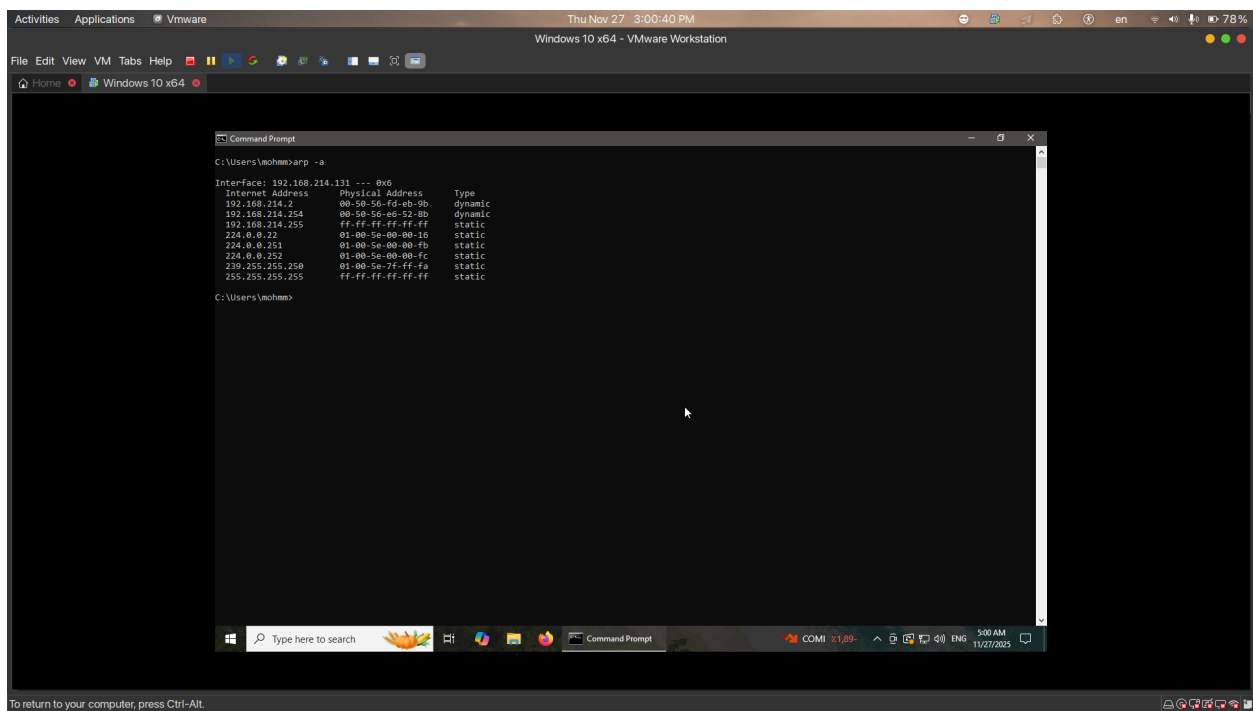


Figure 7: arp -a

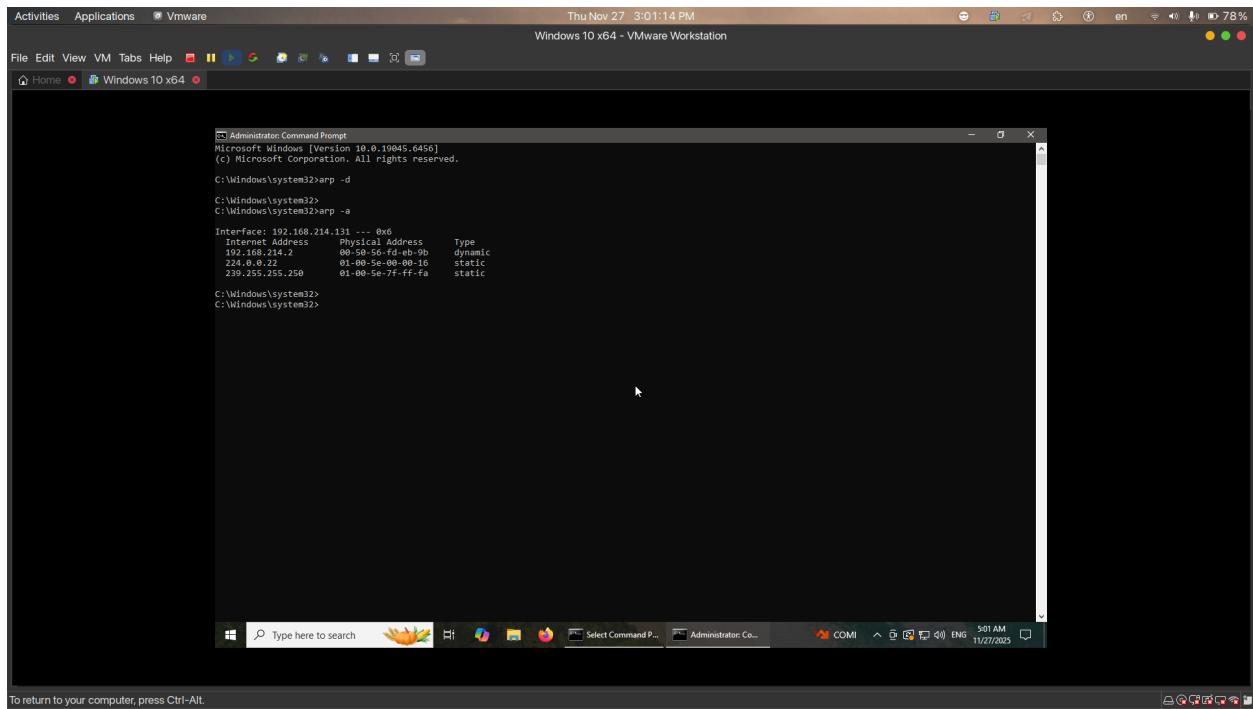


Figure 8: arp -d

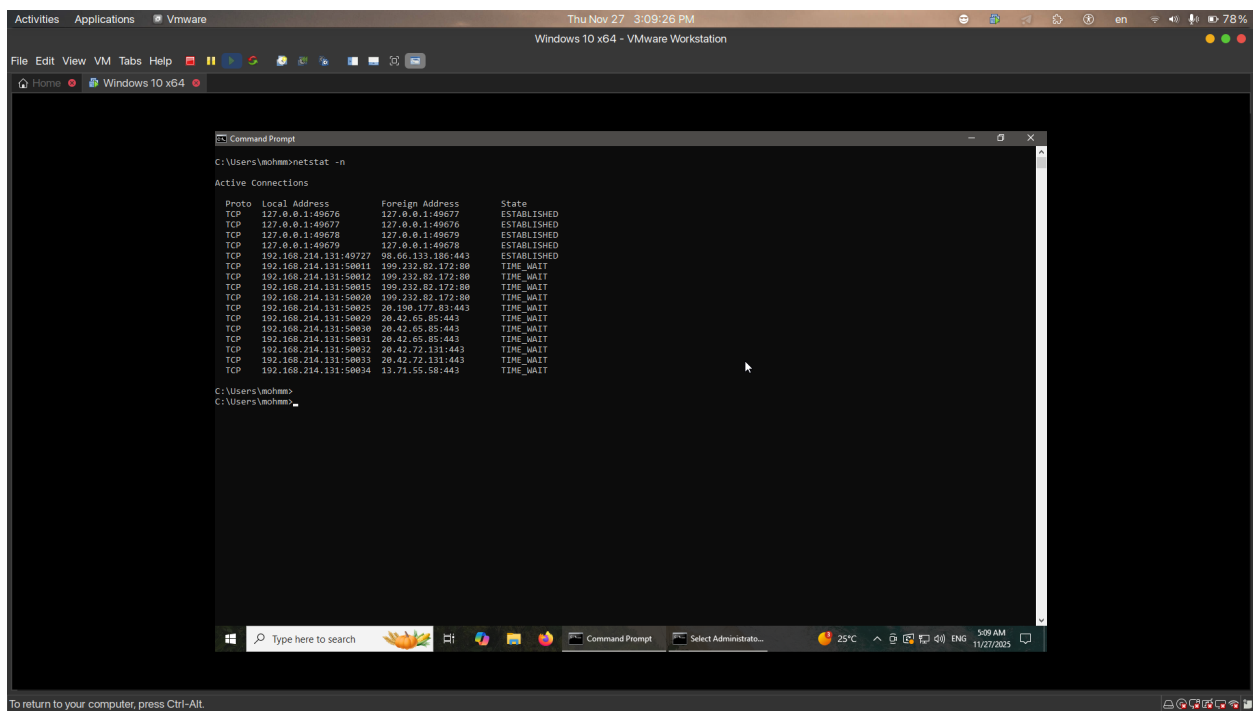


Figure 9: netstat -n

The screenshot shows a Windows 10 x64 virtual machine running in VMware Workstation. A Command Prompt window is open, displaying the output of the `netstat -a` command. The output lists active connections, including listening ports and established connections. The listening ports are:

Proto	Local Address	Foreign Address	State
TCP	0.0.0.0:135	DESKTOP-C2IKGSK:0	LISTENING
TCP	0.0.0.0:445	DESKTOP-C2IKGSK:0	LISTENING
TCP	0.0.0.0:3386	DESKTOP-C2IKGSK:0	LISTENING
TCP	0.0.0.0:5840	DESKTOP-C2IKGSK:0	LISTENING
TCP	0.0.0.0:7680	DESKTOP-C2IKGSK:0	LISTENING
TCP	0.0.0.0:33860	DESKTOP-C2IKGSK:0	LISTENING
TCP	0.0.0.0:49664	DESKTOP-C2IKGSK:0	LISTENING
TCP	0.0.0.0:49665	DESKTOP-C2IKGSK:0	LISTENING
TCP	0.0.0.0:49666	DESKTOP-C2IKGSK:0	LISTENING
TCP	0.0.0.0:49667	DESKTOP-C2IKGSK:0	LISTENING
TCP	0.0.0.0:49668	DESKTOP-C2IKGSK:0	LISTENING
TCP	0.0.0.0:49669	DESKTOP-C2IKGSK:0	LISTENING
TCP	127.0.0.1:49676	DESKTOP-C2IKGSK:49677	ESTABLISHED
TCP	127.0.0.1:49677	DESKTOP-C2IKGSK:49676	ESTABLISHED
TCP	127.0.0.1:49678	DESKTOP-C2IKGSK:49679	ESTABLISHED
TCP	127.0.0.1:49679	DESKTOP-C2IKGSK:49678	ESTABLISHED
TCP	192.168.214.131:135	192.168.214.131:135	ESTABLISHED
TCP	192.168.214.131:49727	98.66.133.186:https	ESTABLISHED
TCP	192.168.214.131:50835	20.189.173.17:https	ESTABLISHED
TCP	192.168.214.131:50836	192.159.142.9:https	ESTABLISHED
TCP	192.168.214.131:50838	192.159.142.9:https	ESTABLISHED
TCP	192.168.214.131:50839	192.159.142.9:https	TIME_WAIT
TCP	:::135	DESKTOP-C2IKGSK:0	LISTENING
TCP	:::1445	DESKTOP-C2IKGSK:0	LISTENING
TCP	:::3386	DESKTOP-C2IKGSK:0	LISTENING
TCP	:::7680	DESKTOP-C2IKGSK:0	LISTENING
TCP	:::33860	DESKTOP-C2IKGSK:0	LISTENING
TCP	:::49664	DESKTOP-C2IKGSK:0	LISTENING
TCP	:::49665	DESKTOP-C2IKGSK:0	LISTENING
TCP	:::49666	DESKTOP-C2IKGSK:0	LISTENING
TCP	:::49667	DESKTOP-C2IKGSK:0	LISTENING
TCP	:::49668	DESKTOP-C2IKGSK:0	LISTENING
TCP	:::49669	DESKTOP-C2IKGSK:0	LISTENING
UDP	0.0.0.0:5858	*	*
UDP	0.0.0.0:5153	*	*
UDP	0.0.0.0:5155	*	*
UDP	127.0.0.1:1980	*	*
UDP	127.0.0.1:5784	*	*
UDP	127.0.0.1:5152	*	*
UDP	192.168.214.131:137	*	*
UDP	192.168.214.131:138	*	*

Figure 10: netstat -a

The screenshot shows a Windows 10 x64 virtual machine running in VMware Workstation. A Command Prompt window is open, displaying the output of the `nslookup` command. The output shows the default server, the IP address, and the names and IP addresses of the servers for the domains `www.google.com`, `www.iti.gov.eg`, and `www.yahoo.com`.

```
C:\Users\mohammed>nslookup
Default Server: 192.168.214.2
Address: 192.168.214.2

> www.google.com
Server: 192.168.214.2
Address: 192.168.214.2

Name: www.google.com.localdomain
Addresses: 172.217.21.4
172.217.21.4

>
> www.iti.gov.eg
Server: 192.168.214.2
Address: 192.168.214.2

Name: iti.gov.eg
Addresses: 156.206.98.258
156.206.98.258
Aliases: www.iti.gov.eg.localdomain

>
> www.yahoo.com
Server: 192.168.214.2
Address: 192.168.214.2

Name: me-yupl.cf-www.g06.yahoodns.net
Addresses: 87.248.119.252
87.248.119.252
Aliases: www.yahoo.com.localdomain

>
>
```

Figure 11: nslookup

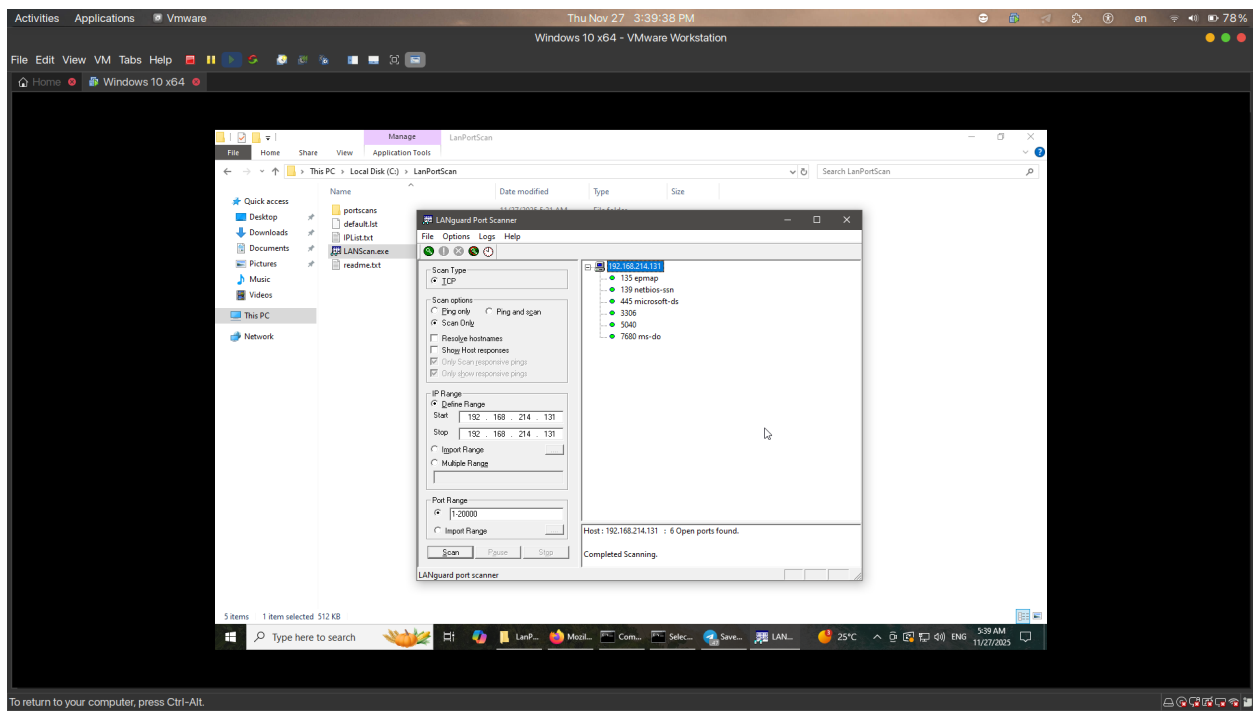


Figure 12: port scanning