

```
In [1]: import scipy.io
import seaborn as sns
import numpy as np
import pandas as pd
import os
import matplotlib.pyplot as plt
```

```
In [2]: # Using os.path.join to create the path
data_dir = "C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp"
for root, dirs, files in os.walk(data_dir, topdown=False):
    for file_name in files:
        path = os.path.join(root, file_name)
        print(path)
```

```
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\BA007_2.mat
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\BA014_2.mat
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\BA021_2.mat
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\IR007_2.mat
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\IR014_2.mat
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\IR021_2.mat
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\OR007_2.mat
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\OR014_2.mat
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\OR021_2.mat
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\rN_2.mat
```


```
In [3]: # Using f-strings for path
path = f'C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\OR021_2.mat'
mat = scipy.io.loadmat(path)
```

```
In [4]: # Using mat.keys() directly
key_name = list(mat.keys())[3]
```

```
In [5]: # Simplifying fault creation
fault = np.full((len(mat[key_name]), 1), file_name[:-4])
```

```
In [6]: # Using DataFrame initialization directly
df_temp = pd.DataFrame({'DE_data': np.ravel(mat[key_name]), 'fault': np.ravel(fault)})
```

```
In [7]: # Plotting directly without creating a variable
plt.figure(figsize=(15, 5))
plt.plot(df_temp.iloc[:, 0])
plt.show()
```

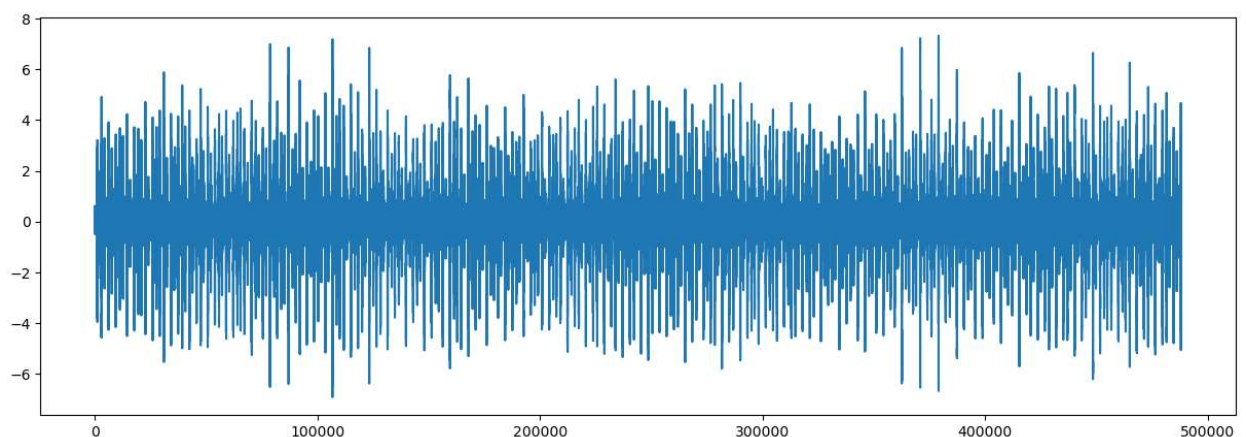

```
In [8]: # Initializing df with data directly
df = pd.DataFrame(columns=['DE_data', 'fault'])
```

```
In [9]: # Using f-strings for path
data_dir = "C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp"
for root, dirs, files in os.walk(data_dir, topdown=False):
    for file_name in files:
        # Check if the file has a .mat extension
        if file_name.endswith('.mat'):
            path = os.path.join(root, file_name)
            print(path)

            try:
                mat = scipy.io.loadmat(path)
                key_name = list(mat.keys())[3]
```

```

DE_data = mat.get(key_name)

# Simplifying fault creation
fault = np.full((len(DE_data), 1), file_name[:-4])

# Concatenating directly without creating df_temp
df = pd.concat([df, pd.DataFrame({'DE_data': np.ravel(DE_data), 'fault': np.ravel(fault)})],
print(df['fault'].unique())

except Exception as e:
    print(f"Error processing file {file_name}: {e}")

```

```

C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\BA007_2.mat
['BA007_2']
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\BA014_2.mat
['BA007_2' 'BA014_2']
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\BA021_2.mat
['BA007_2' 'BA014_2' 'BA021_2']
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\IR007_2.mat
['BA007_2' 'BA014_2' 'BA021_2' 'IR007_2']
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\IR014_2.mat
['BA007_2' 'BA014_2' 'BA021_2' 'IR007_2' 'IR014_2']
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\IR021_2.mat
['BA007_2' 'BA014_2' 'BA021_2' 'IR007_2' 'IR014_2' 'IR021_2']
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\OR007_2.mat
['BA007_2' 'BA014_2' 'BA021_2' 'IR007_2' 'IR014_2' 'IR021_2' 'OR007_2']
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\OR014_2.mat
['BA007_2' 'BA014_2' 'BA021_2' 'IR007_2' 'IR014_2' 'IR021_2' 'OR007_2'
'OR014_2']
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\OR021_2.mat
['BA007_2' 'BA014_2' 'BA021_2' 'IR007_2' 'IR014_2' 'IR021_2' 'OR007_2'
'OR014_2' 'OR021_2']
C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp\rN_2.mat
['BA007_2' 'BA014_2' 'BA021_2' 'IR007_2' 'IR014_2' 'IR021_2' 'OR007_2'
'OR014_2' 'OR021_2' 'rN_2']

```

```

In [10]: # Save the resulting DataFrame to a CSV file
df.to_csv('C:/FAULT_DIAG_PROJ/CWRU_dataset/48k_drive_end/2hp/2hp_all_faults.csv', index=False)

```

```

In [11]: # Display the DataFrame
df

```

```

Out[11]:

```





	DE_data	fault
0	0.099927	BA007_2
1	0.141650	BA007_2
2	0.178366	BA007_2
3	0.194638	BA007_2
4	0.168770	BA007_2
...	...	...
487960	-0.021701	OR021_2
487961	0.177784	OR021_2
487962	0.441539	OR021_2
487963	0.665229	OR021_2
0	1.000000	rN_2





4388198 rows × 2 columns


```

In [12]: # Simplifying the faults loop
for f in df['fault'].unique():
    plt.figure(figsize=(10, 3))
    plt.plot(df[df['fault'] == f].iloc[:, 0])
    plt.title(f)
    plt.show()


```

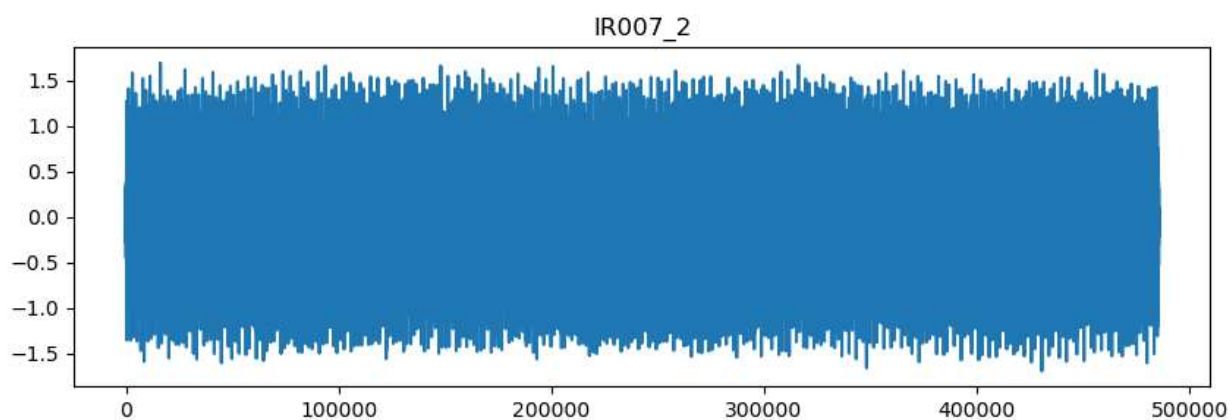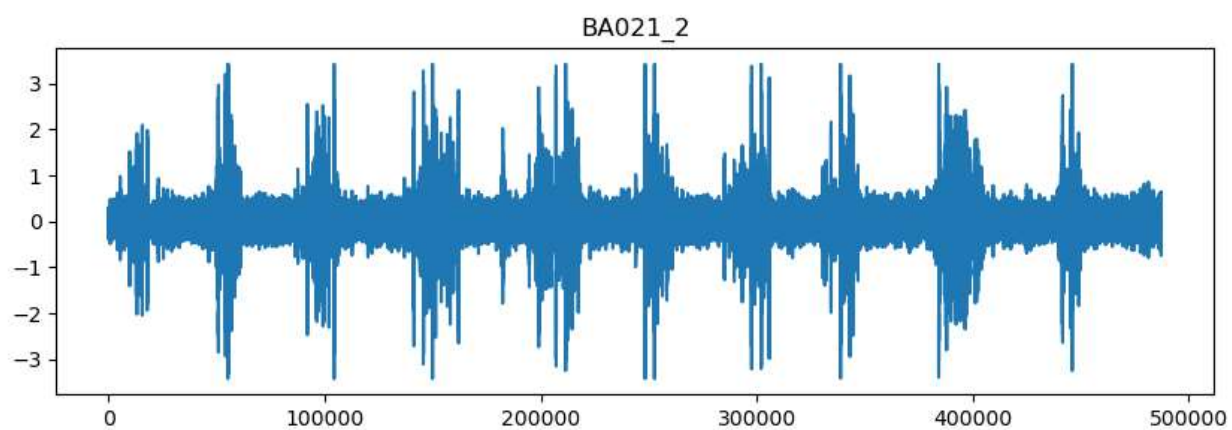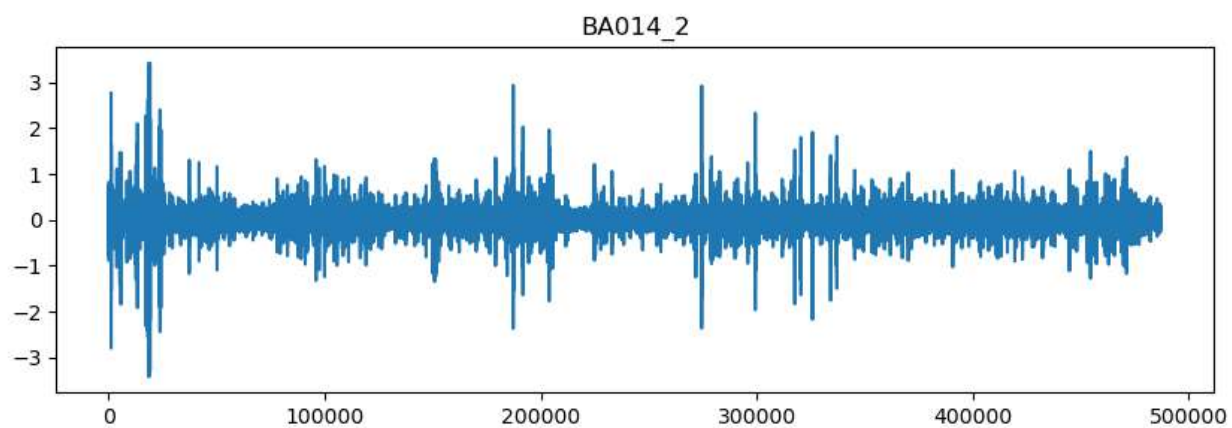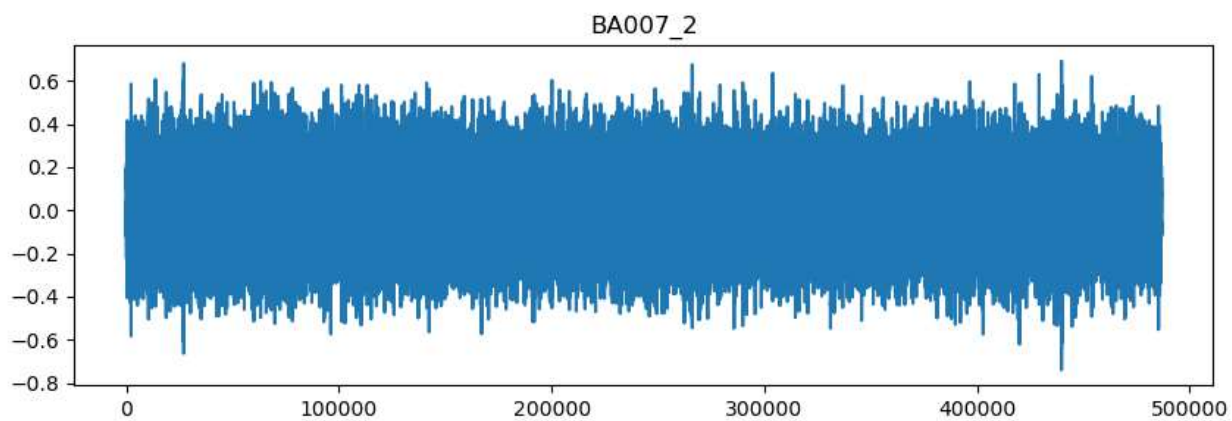

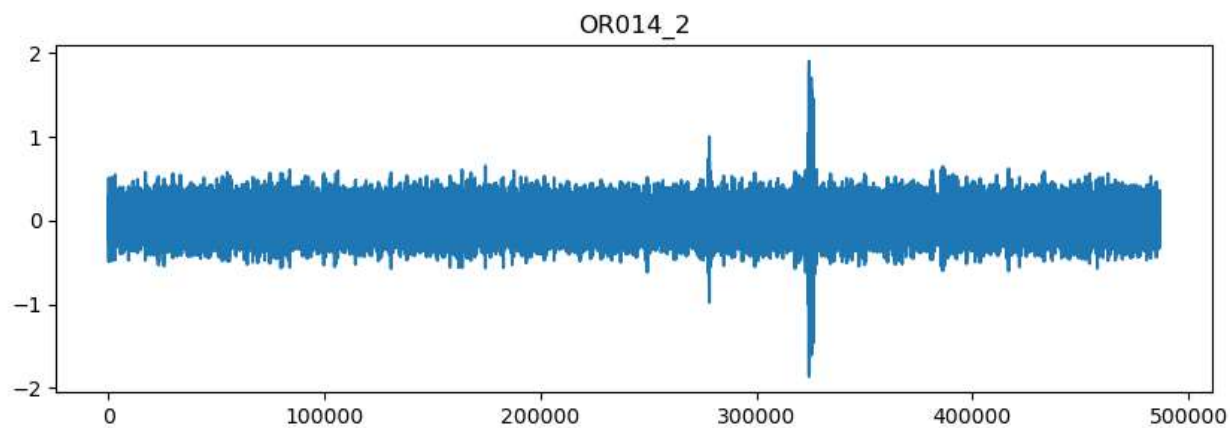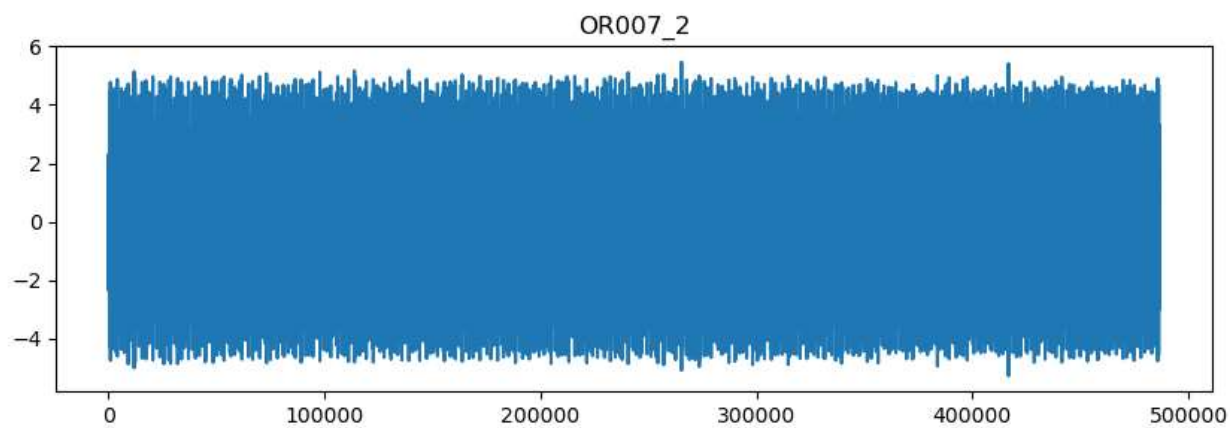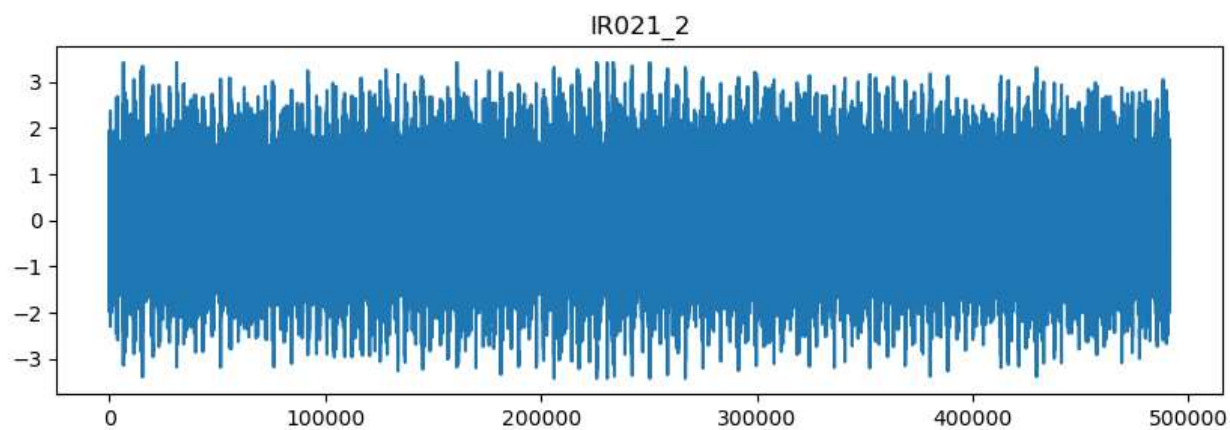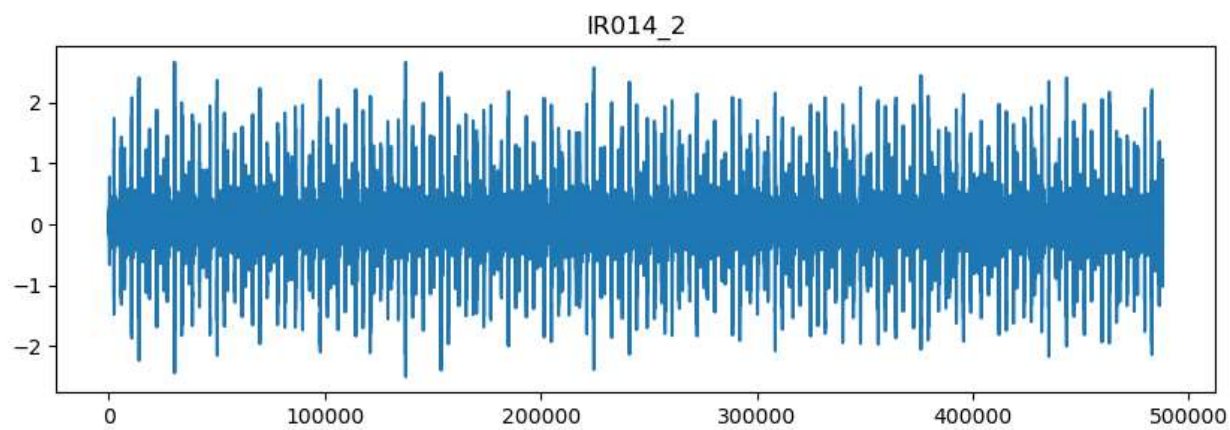

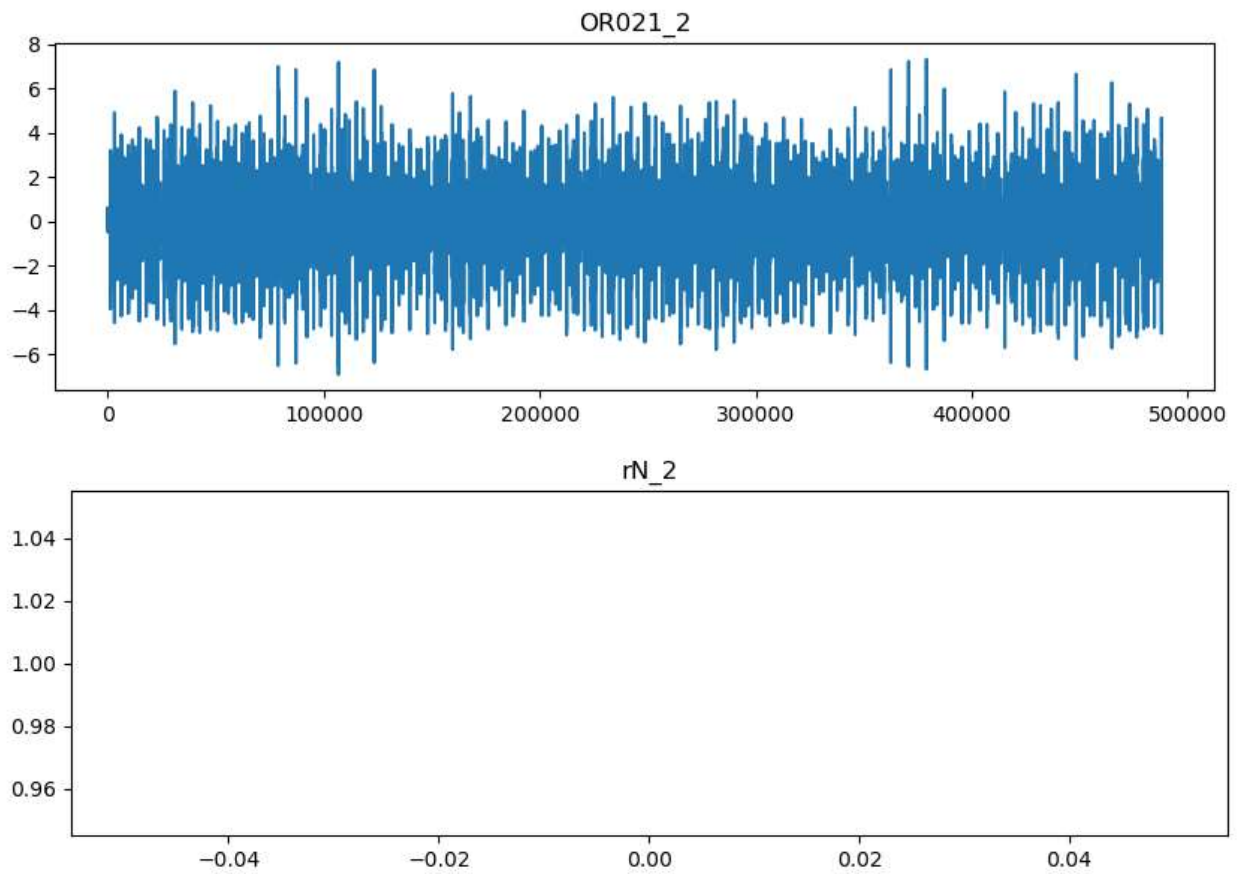

```
In [13]: # Plotting directly without creating a variable
plt.figure(figsize=(15, 5))
sns.scatterplot(data=df.iloc[:, :100, :], y='DE_data', x=np.arange(0, len(df), 100), hue='fault')
plt.show()
```

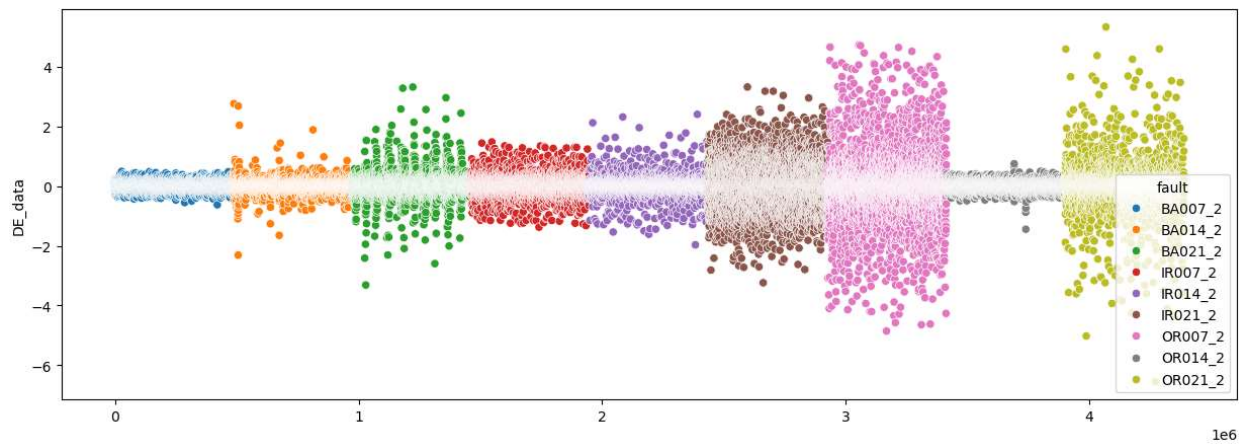

```
In [ ]:
```