


This flowchart illustrates a simplified function call sequence for a single connection application beginning with the handshake process and ending with application termination. This flowchart assumes the application will attempt to write to the secure connection first. In a multi-connection application, the function `ssl_DestroyGlobalContext()` should not be called until the application terminates, or the SSL protocol is no longer required. Note that not all possible return code cases are represented here. Only I/O blocking and handshake renegotiation error codes are shown.

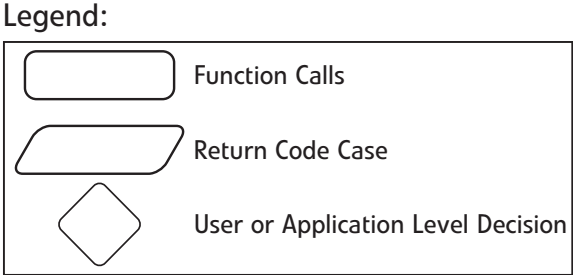

Copyright 2002 Certicom Corp.