
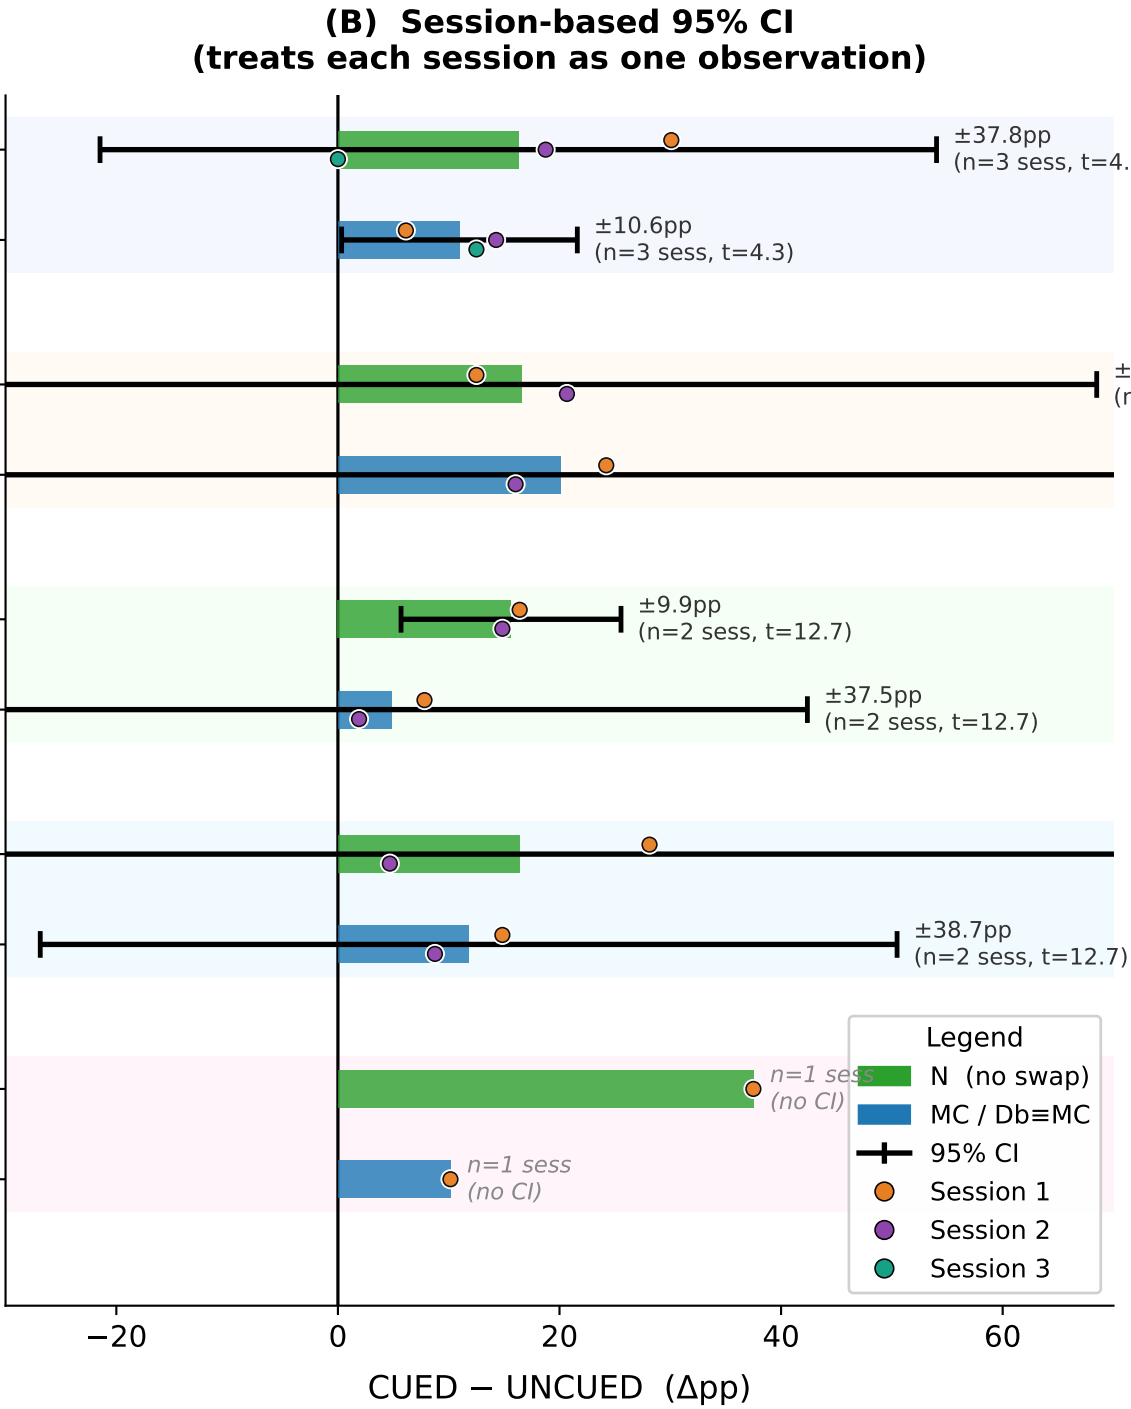


VRDots — Confidence Intervals: Binomial (trial-level) vs Session-based (replication-level)
Both show 95% CI | session dots = individual session Δpp | bars = mean of pooled (A) or sessions (B)

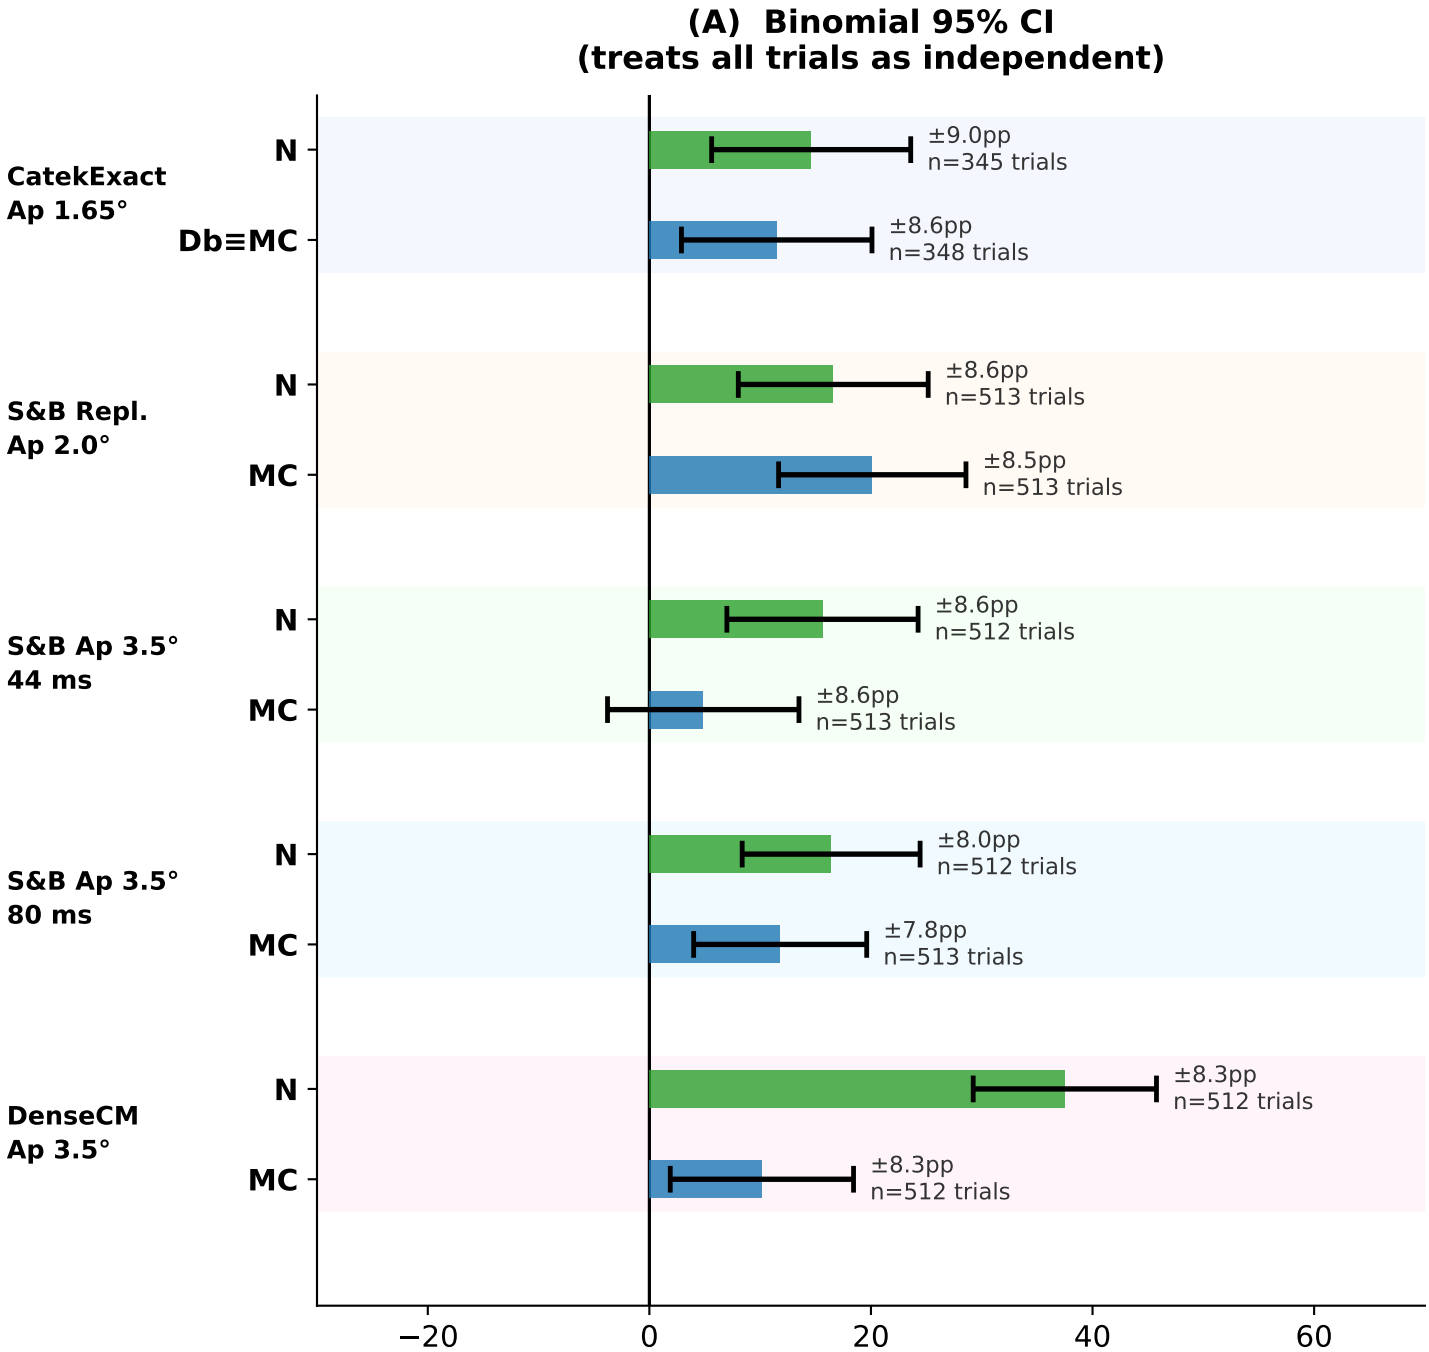

How to read these plots:

- (A) Binomial CI answers: 'Is the cueing effect different from 0 in this pooled dataset?'
- Narrow because it assumes all N=200–500 trials are independent observations.
 - Correct for a null-hypothesis test against chance, but ignores session-to-session noise.
- (B) Session CI answers: 'Would a new session likely show the same effect?'
- Each session is treated as one data point (the correct unit for a single observer).
 - t-critical for n=2 sessions is 12.7; for n=3 sessions is 4.3 → CIs are wide.
 - Wide CI = genuine uncertainty; a few unusual sessions dominate the estimate.
 - This is the CI to report when comparing two different parameter conditions collected in separate sessions.