


Da condition — 2D Trace Stimulus (one dot per subfield, one translation direction)
 Based solely on Exp_SubfieldSwap_CatekExact.asset parameters + ExpSpecTestPhase.cs motion logic
 Times: TB=750ms (FieldB onset) TS=1050ms (Da swap + translation) TE=1130ms


Booking label: CUED
 FieldB translates → Sub0 (●, GREEN) does coherent translation
 Sub0 was always-on (FieldA) = onset-cue UNCUEd

← TB: FieldB appears

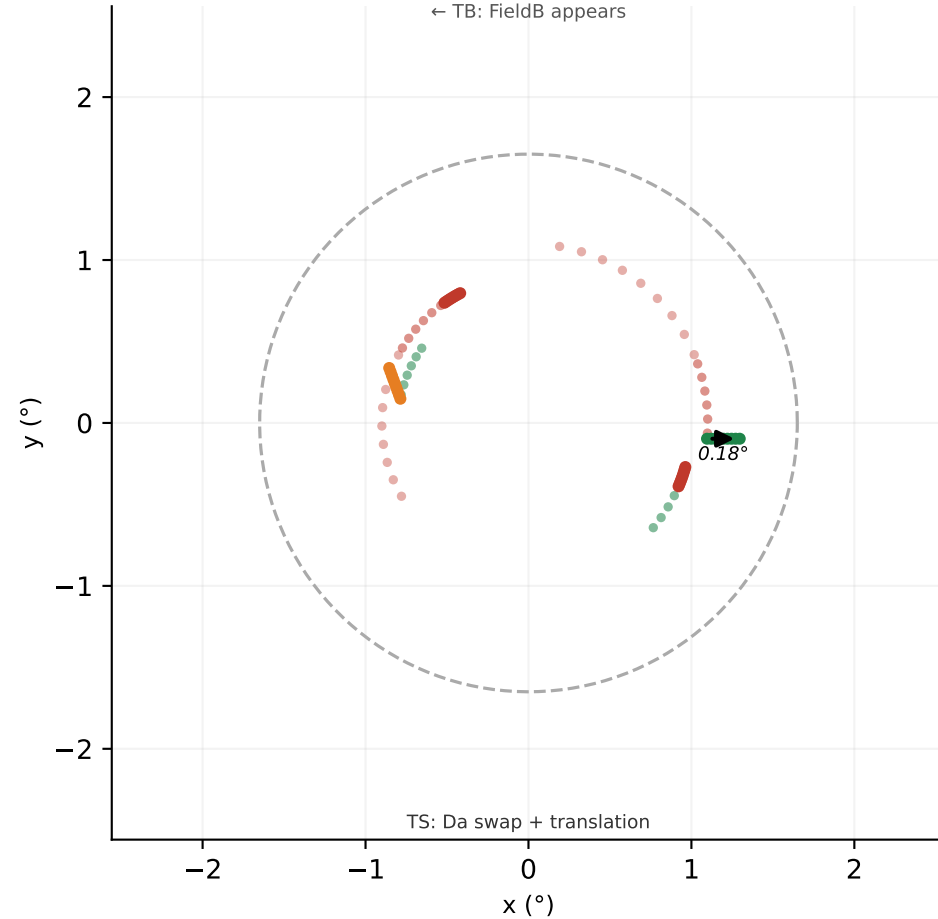

Booking label: UNCUEd
 FieldA translates → Sub2 (◆, RED) does coherent translation
 Sub2 was delayed/onset-cue (FieldB) = onset-cue CUED

← TB: FieldB appears

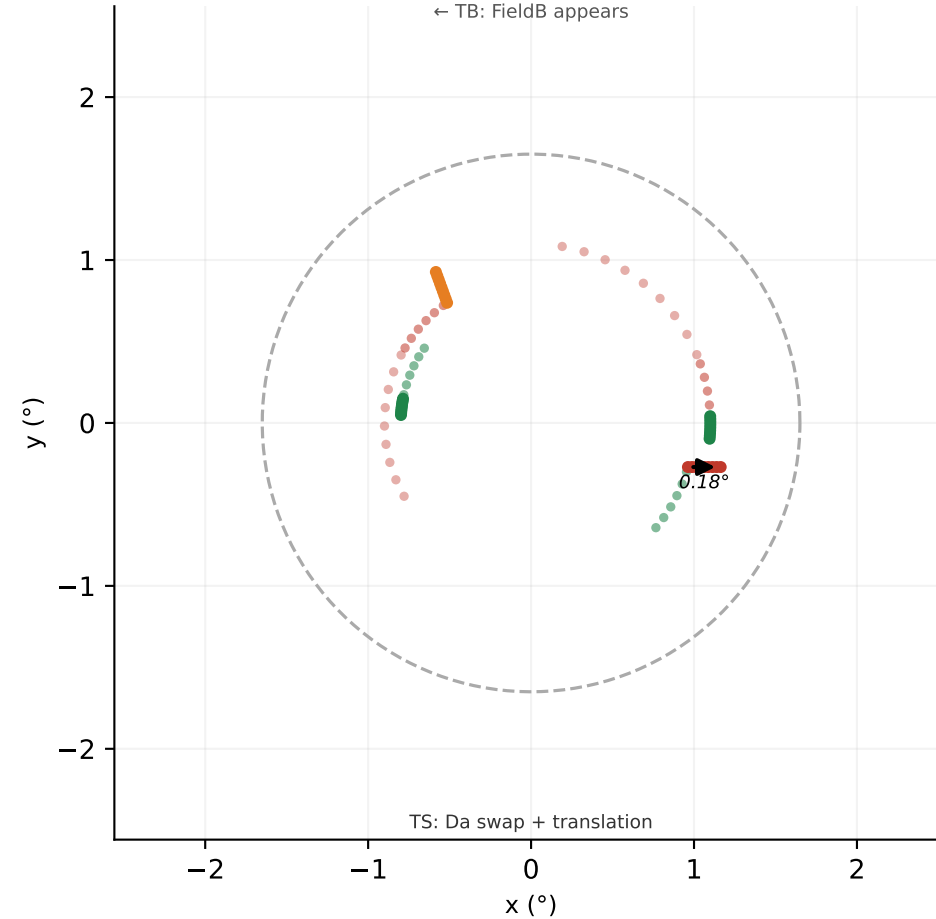

Subfield markers (from asset: R=1.65°, rot=81°/s, trans=2.26°/s × 80ms = 0.181°)

- Sub0 ● FieldA·coh (RED before TS, GREEN after TS)
- Sub1 □ FieldA·noise (RED throughout)
- ◆ Sub2 ◆ FieldB·coh (GREEN before TS, RED after TS) ← ONSET CUE
- ▼ Sub3 ▽ FieldB·noise (GREEN throughout)
- ◇ open marker = appearance at TB (delayed onset)
- solid trace = coherent subfield (pre-swap rotation)
- dashed trace = noise subfield (rotation)
- ... dotted orange = NonCoherent translation (arbitrary direction shown)
- arrow = coherent translation (0.181° rightward, 80 ms)