
THE WINDOW FOR PREVENTIVE ACTION BEFORE AI SATURATES MOST COGNITIVE BENCHMARKS IS CLOSING

A PREPRINT

Jérémy Andréoletti* Antoine Maier Laura Domenech Tom David

General-Purpose AI Policy Lab

Abstract

This position paper argues that without coordinated intervention, AI systems will by default saturate most existing cognitive benchmarks by 2030, approaching or exceeding human expert performance across a broad range of measurable tasks. Using a joint hierarchical Bayesian model, we forecast frontier performance trajectories across 98 benchmarks spanning reasoning, mathematics, coding, cybersecurity, scientific knowledge, and agentic capabilities. We find that nearly all current benchmarks (98% in our set, 80% CI: 96–99%) are on track to saturate before 2030. This finding is robust to modeling choices, as sensitivity analyses across 8 model variants and three saturation thresholds show that altering key assumptions yields qualitatively similar conclusions. Security-critical benchmarks (cybersecurity, autonomous AI R&D, biology, chemistry) saturate earlier still, all by early 2028. While benchmark saturation does not equate to artificial general intelligence, these findings add to a converging body of evidence indicating that superhuman performance on cognitive tasks is approaching faster than commonly assumed. Acknowledging that we neither understand nor control the behavior of current general-purpose AI (GPAI) models, this timeline leaves limited runway before irreversible impacts. We outline implications for global governance and international coordination, AI safety research, and evaluation practices.

Keywords AI progress · benchmark saturation · capability forecasting · AI safety · AGI

1 Introduction

The pace at which new benchmarks have been developed over the past five years has only been matched by the speed at which these benchmarks have been climbed by each new generation of General-Purpose AI (GPAI) models (Epoch AI (2024); Bengio et al. (2025); AISI (2025); Figure 1). Tasks that were once considered out of reach, from doctorate-level science questions to competitive mathematics and autonomous software engineering, are now routinely solved by frontier models. Yet discussions about when AI might reach or exceed human-level performance on broad cognitive tasks often place it decades away (Grace et al., 2018, 2025) or treat it as deeply uncertain.

Our position: Based on a systematic analysis of benchmark trajectories, we argue that AI systems are on track to saturate most existing cognitive benchmarks by 2030, approaching or exceeding human expert performance across a broad range of measurable cognitive tasks. This projection, which includes security-critical capabilities, leaves a limited runway before irreversible impacts, thereby warranting urgent preventive action. This is not a prediction that AGI will necessarily arrive by 2030, as the relationship between benchmark performance and general intelligence remains contested (Chollet, 2019). However, it is a call to take seriously the empirical trend that AI is saturating our best evaluations faster than anticipated, and faster than current coordination efforts for global GPAI risk management.

*Corresponding author: jeremy.andreoletti@gmail.com

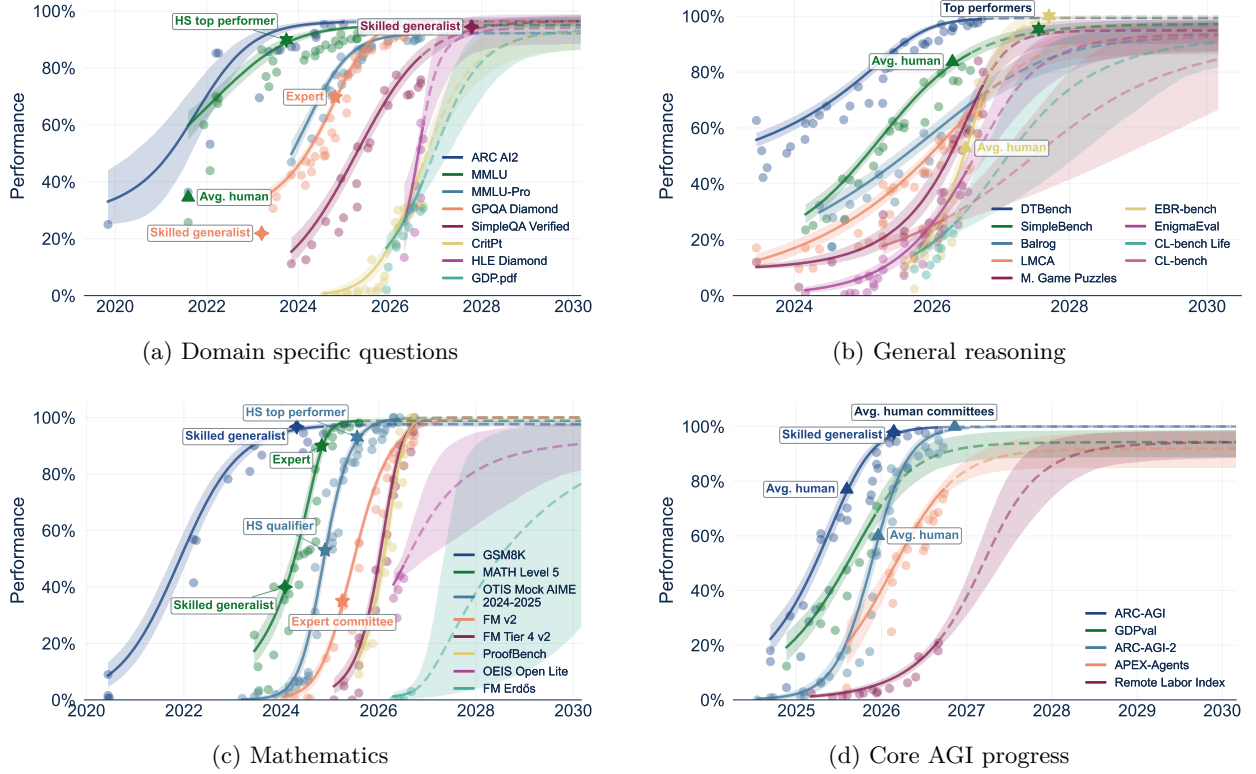


Figure 1: **Benchmark trajectories across capability categories.** Points show frontier model scores at release; solid lines show posterior mean trajectories; shaded regions indicate 80% credible intervals. Dashed lines extrapolate to 2030. Human reference points are star-like symbols whose number of branches denotes the expertise level: 3 for average human, 4 for skilled generalist, 5 for domain expert, and 6 for top performer. See more details in Appendix F. All categories show rapid progress towards saturation, with several benchmarks already exceeding human expert baselines.

If correct, this timeline leaves little time to develop robust alignment or control techniques, given the current lack of any reliable method for understanding and steering powerful AI systems (Casper et al., 2023; Bengio et al., 2025; Maier et al., 2025; Ngo et al., 2025). It also implies an urgency regarding international coordination on AI; the earlier multilateral discussions gain momentum, the more time will be available for countries to converge on a global course of action before GPAI models could start posing irreversible security issues. Even in optimistic safety scenarios, this pace of progress leaves only a few years for institutions to adapt to transformative AI capabilities.

This position therefore chains three claims resting on evidence of decreasing strength. **(C1) Saturation:** frontier models reach 95% of the score range on nearly all benchmarks in our set before 2030. This is the output of our forecasts, robust to every modeling choice we varied (Appendix B) and validated by temporal holdout (Appendix C). **(C2) Human-expert parity:** saturation implies matching or exceeding domain-expert performance on the measured tasks (35 of our 98 benchmarks carry human baselines, including domain-expert baselines for 15 of them, see Appendix F). **(C3) A short window before large impacts:** reaching that level without reliable means of controlling these systems leaves limited time to act before consequences become hard to reverse. This argument, based on the capabilities involved, is detailed in Section 4.4.

Our contribution is threefold: (1) We provide quantitative evidence from 98 benchmarks and 48 human baselines showing convergent saturation trajectories based on a new modeling framework; (2) We analyze AI progress specifically in security-critical capability domains; (3) We outline implications for researchers and policymakers.

2 Evidence: Benchmark Trajectories

2.1 Data and Methodology

We analyze performance trajectories on 98 benchmarks spanning diverse cognitive capabilities: commonsense, reasoning, scientific knowledge, mathematical problem-solving, code generation, cybersecurity, agentic computer use, and multimodal understanding. Benchmark scores are sourced from the Epoch AI Benchmark database (Epoch AI, 2024), including its compilation of cybersecurity results from the UK AI Security Institute and other developers (Chauvin et al., 2026), Scale AI leaderboards (Scale AI, 2025b), evaluations by the RAND Corporation (Dev et al., 2025), Kaggle Open Benchmarks (Kaggle, 2026) and the Cybench leaderboard (Zhang et al., 2025). We exclude benchmarks whose scores cover too small a share of the frontier models of their period, deprecated series, and series with documented quality problems. All included benchmarks are described and cited in Appendix E.1. To ensure that our projections are based on a well-defined observation window and can be reproduced, we restrict the fitting data to models released up to October 1, 2026. We contextualize these projections by overlaying human performance baselines where available. These baselines range from average crowdworkers to world-class experts, providing interpretable reference points for AI progress. Detailed human baseline sources are provided in Appendix F.

Terminology. We use *score* for a published benchmark result and *capability* for the best performance a model can exhibit across elicitation conditions, given this is where tail risks should come from. *Saturation* means reaching 95% of the range between random chance and the estimated asymptote.

To project future performance, we employ hierarchical Bayesian models which capture the S-shaped trajectories empirically observed in benchmark progress. Our approach introduces three methodological improvements over existing AI capability forecasting:

(1) Asymmetric growth curves. We use Harvey curves (Harvey, 1984) instead of standard logistic functions. Unlike the logistic curve, the Harvey function allows for an asymmetry between the initial acceleration of benchmark progress and its deceleration as scores reach saturation (Figure 2). This asymmetry is captured by a shape parameter $\alpha > 1$, which reduces the Harvey curve to a logistic function when $\alpha = 2$. This choice avoids the logistic assumption that performance should accelerate and then decelerate at the same rate. A sensitivity analysis in Appendix B confirms that the main saturation finding is robust to replacing the Harvey curve with a logistic.

(2) Hierarchical Bayesian modeling. Rather than fitting each benchmark independently, we jointly model all 98 benchmarks with shared hyperpriors over growth rates, upper asymptotes, as well as shape and noise parameters. This allows information exchange, as data-rich benchmarks inform projections for newer or more data-sparse benchmarks. The cross-validation (LOO-ELPD) model comparison confirms that joint models achieve better complexity-corrected fits (Supp. Table 2). The main saturation finding is robust to removing the hierarchical structure (Appendix B). Appendix A gives every prior, and Appendix A.5 explains what the Bayesian hierarchy does in plain terms. Models are written in PyMC (Abril-Pla et al., 2023) and sampled with the No-U-Turn Sampler (NUTS) as implemented in nutpie.

(3) Skewed likelihood at the frontier. Benchmark scores typically underestimate true model capabilities due to suboptimal prompting, scaffolding, or evaluation conditions (the “elicitation gap”). They also cannot estimate the capabilities of unreleased models. To mitigate this gap, we model observations at the top-3 frontier with a skew-normal likelihood, allowing scores to fall predominantly below a latent curve that represents the performance frontier. We verify that this modeling choice does not inflate our projections. Replacing the skew-normal with a symmetric normal likelihood yields qualitatively similar saturation conclusions (Appendix B), and moves projected saturation dates later by 2.5 months on average over the other modeling choices (Supp. Table 4).

Mathematically, for benchmark i at time t , the latent frontier capability $\mu_i(t)$ rises from the random-chance floor ℓ_i to an inferred asymptote L_i along a Harvey curve (Harvey, 1984) with growth rate k_i , inflection time τ_i and shape $\alpha_i > 1$, and the observed scores $y_i(t)$ scatter around it:

$$\mu_i(t) = \ell_i + (L_i - \ell_i) \left[1 - (1 - \alpha_i) e^{-k_i(t - \tau_i)} \right]^{\frac{1}{1 - \alpha_i}}, \quad y_i(t) \sim \text{SkewNormal}(\mu_i(t), \xi_i(t), s_i). \quad (1)$$

We validate our forecasting methodology through temporal holdout, training on data before January 2025 and evaluating predictions on observed scores from January 2025 to October 2026. The joint model and the Harvey curve consistently improve the held-out continuous ranked probability score (CRPS), whereas the skew-normal likelihood predicts nearly as well as the normal one (CRPS 0.056 against 0.055 for the joint

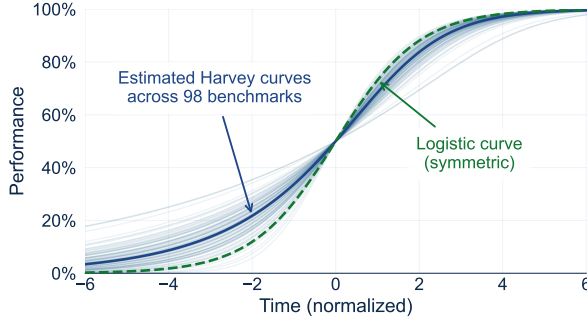


Figure 2: **Harvey curves capture asymmetric progress.** Fitted Harvey curves (blue) show more gradual acceleration compared to the logistic (green dashed). Curves are standardized to 50% at time 0 with growth rate 1. The thick blue curve is the median Harvey trajectory.

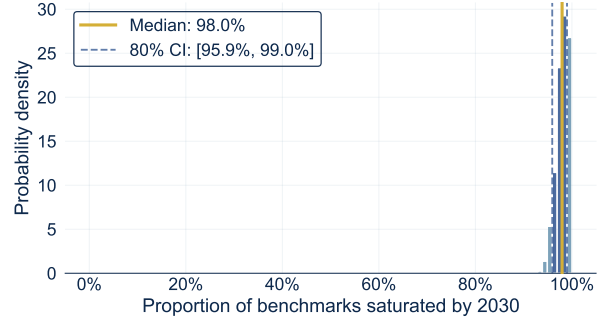


Figure 3: **Nearly all benchmarks projected to saturate by 2030.** Posterior distribution of the proportion of benchmarks reaching 95% of their score range by 2030. The median is 98.0%, indicating that saturation by 2030 is the default scenario.

Harvey variants, Supp. Table 7). We keep the skew-normal likelihood for our main model because it gives the best cross-validation fit by a wide margin (Supp. Table 2) and models the elicitation gap explicitly. On this holdout, the observations the model misses almost all fall above its 80% intervals, so its errors have been to project progress too slowly. All uncertainty intervals reported in this paper are Bayesian credible intervals (posterior quantiles). We additionally check, with conformal prediction, how much the intervals calibrated on one set of benchmarks need to be adjusted to reach their nominal coverage on benchmarks held out from calibration (Supp. Table 7). See Appendix A for model specification, Appendix B for the sensitivity analysis, and Appendix C for validation details.

2.2 Main Finding: Saturation by 2030

Our central empirical finding is that **approximately 98% of analyzed benchmarks are projected to reach saturation before 2030** (Figure 3), where saturation is defined as achieving 95% of their score range (between random chance and estimated asymptote). Benchmarks are typically considered saturated well before this point, and the smooth sigmoidal fit spreads the final percentage points over an extended period with no meaningful capability gains. Sensitivity analyses with thresholds of 90% and 99% confirm that this choice does not qualitatively affect our conclusions (Appendix B).

This finding is robust across benchmark categories, as shown in Table 1, which summarizes the twelve capability categories and projected saturation dates. All median saturation dates but three fall before 2029 (Supp. Table 8), the exceptions being FrontierMath Erdős in July 2029, DeepResearch Bench in August 2029 and CL-bench in January 2030, the only benchmark whose median falls after 2029; FrontierMath Erdős and CL-bench also carry the widest credible intervals. Even at the late end of their 80% credible intervals, 93 of the 98 benchmarks saturate before 2030. Mathematics benchmarks, whose expert baselines include a three-time IMO gold medalist at 90% on MATH and teams of mathematics students and experts solving 35% of FrontierMath problems in four and a half hours (Hendrycks et al., 2021; Epoch AI, 2025d), are mostly at or near saturation. By September 2026, frontier models scored 94% on FrontierMath Tiers 1–3 and 100% on Tier 4, and only the recent FrontierMath Erdős set, with four observations, is projected beyond 2028.

Benchmarks with direct security implications all saturate within the next few years (Figure 4). All thirteen cybersecurity benchmarks are projected to saturate by mid-2027, and all fourteen autonomous software engineering and AI R&D benchmarks by early 2028, suggesting that AI systems able to significantly accelerate AI research may emerge within a few years. In agentic computer use, every benchmark but DeepResearch Bench saturates by the end of 2027. Among the dual-use benchmarks, chemistry saturates earliest, by early 2026 (Supp. Figure 6), and biology by the end of 2027, with frontier models already exceeding the domain-expert baselines (38–83%) on six of the eleven biology and chemistry benchmarks that have one, and within half a point of it on a seventh (GPQA Main Chemistry). These domains do not convert scores into real-world capability in the same way. Cyber and AI R&D benchmarks are close to end-to-end because the output, an exploit or a code change, is the object required by the task, and the surrounding infrastructure is already digital. By contrast, biology and chemistry benchmarks only measure knowledge and protocol

Table 1: **Projected saturation by capability category**, ordered by the latest date within the category. n is the number of benchmarks in the category. The human-baseline column spans every human baseline recorded for the category’s benchmarks, from crowdworkers to domain experts and expert committees, so a wide range reflects that mixture of populations rather than disagreement between measurements of the same quantity; Appendix F lists each baseline with its expertise level, and a dash means that no human baseline is available for any benchmark in the category. The last two columns give the earliest and latest posterior median saturation date among the category’s benchmarks. Benchmarks are listed individually in Supp. Table 8 and described in Appendix E.1.

Category	n	Human baseline	Projected saturation	
			Earliest	Latest
Chemistry	5	22–90%	2024-08	2026-01
Cyber	13	—	2025-01	2027-05
Trivia & Commonsense QA	5	80–96%	2022-10	2027-08
Biology	11	22–90%	2024-01	2027-12
Autonomous SWE	14	83%	2025-07	2028-01
Core AGI Progress	5	60–100%	2026-01	2028-02
Advanced Language and Writing	5	—	2024-11	2028-02
Domain Specific Questions	8	22–94%	2023-06	2028-06
Multimodal Understanding	8	55–100%	2025-07	2028-08
Mathematics	8	35–97%	2023-09	2029-07
Agentic Computer Use	7	72%	2026-05	2029-08
General Reasoning	9	53–100%	2026-01	2030-01

understanding, while real-world harm would additionally require materials, laboratory access, tacit skill and successful execution (Dev et al., 2025). We therefore interpret saturation on biology and chemistry benchmarks as the removal of a knowledge barrier, not yet as an operational capability. The four remaining categories are presented in Appendix D.

2.3 Historical Context on Estimating AI Progress

Our projections should be interpreted against a recent pattern of systematic underestimation of AI progress (Kučinskis et al., 2025). This contrasts with the earlier history of AI, with periods of excessive optimism about symbolic AI and expert systems, with recurrent failed predictions that human-level AI was fifteen to twenty years away, followed by “AI winters” in the 1970s and late 1980s. However, the current wave of deep learning progress, beginning around 2012, has consistently exceeded expectations. Since 2020, milestones in language understanding, mathematical reasoning, and code generation have arrived well ahead of expert forecasts (Steinhardt, 2022). For example, AI achieving gold-medal performance at the International Mathematical Olympiad was forecast for around 2030 by both domain and non-domain experts, with only 9% probability up to 2025, the year it was achieved (Kučinskis et al., 2025).

3 Implications

Our forecasts inform the time remaining before frontier systems match expert performance on most measurable cognitive tasks, but say nothing about which interventions would change that. As we do not provide evidence for the effectiveness of specific policy instruments, we keep our recommendations modest, based mainly on whether the payoff arrives inside the window.

3.1 For International Coordination

The main goal of this paper is to ensure decision-makers recognize two points. First, that GPAI capabilities are advancing rapidly, and that closely monitoring frontier progress is important for making informed policy decisions. Second, regarding control and security-critical issues, that the projected trajectory is not inevitable, as it results from investment decisions (Sevilla et al., 2024), compute infrastructure build-out (Epoch AI, 2025b), and research priorities (Erdil and Besiroglu, 2023) that remain subject to collective choice.

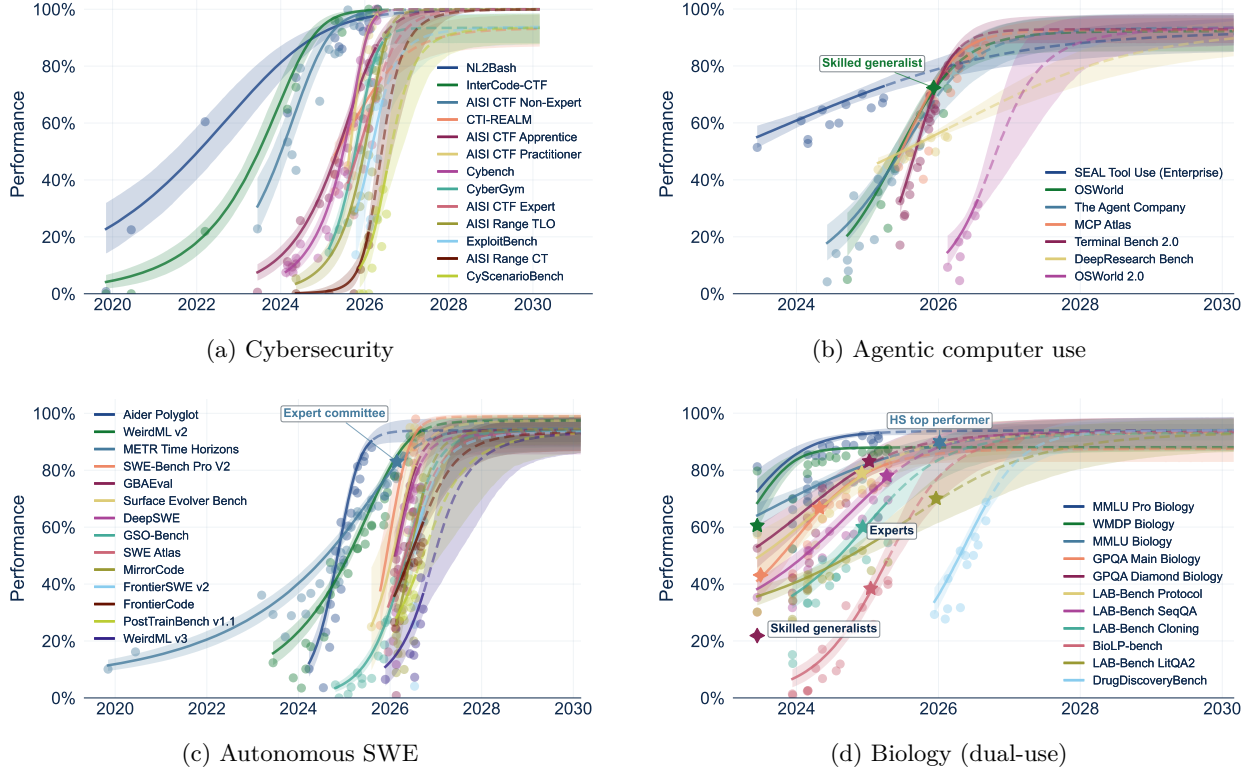


Figure 4: **Security-critical capability trajectories.** Benchmarks with direct safety implications show rapid progress, with most projected to saturate by 2027–2028; chemistry, which saturated earliest, is shown in Supp. Figure 6. Starred markers indicate human baselines where available. On OSWorld, users unfamiliar with the software achieve 72% (Xie et al., 2024); on biology benchmarks, domain experts range from 38% (BioLP-bench, laboratory practitioners) to 83% (GPQA Diamond Biology, in-domain PhDs) (Dev et al., 2025; Rein et al., 2023). Graphical conventions are similar to Figure 1.

Given the projections in this article, the earlier investments are made to build capacity that has to exist in advance, such as monitoring of frontier capabilities, verification mechanisms and evaluation infrastructure, and the earlier multilateral discussions begin, the more options remain viable.

3.2 For AI Safety Research

The timeline for developing robust AI alignment techniques is short. Current approaches to alignment remain nascent. Despite some progress, they still fail to ensure a high level of safety for current AI models, let alone scaling to systems significantly exceeding human capabilities (Amodei et al., 2016; Bengio et al., 2025). Alignment is an open scientific problem, which implies that by default these systems should not be expected to remain under human control (Maier et al., 2025; Ngo et al., 2025).

Given these short timelines, one cannot rely on any single research agenda succeeding, and we are not aware of a current research direction that we would confidently describe as on track to make systems of the projected capability robustly controllable. We therefore recommend a portfolio approach:

- **Near-term agendas:** Prioritize research with potential payoffs within 3–5 years, such as technical governance agendas like robust verification mechanisms (Wasil et al., 2024; Scher and Thiergart, 2024; Peigné et al., 2026).
- **Alternative architectures:** Invest in fundamentally different approaches (safe-by-design architectures, formal verification) to hedge against alignment failure in current paradigms (Dalrymple et al., 2024).
- **Differential technology development:** Prioritize research that advances safety and defensive capabilities over risk-increasing ones (Sandbrink et al., 2022).

We strongly underscore, however, that safety research alone cannot guarantee good outcomes if capability development continues regardless of safety progress.

3.3 For Evaluation Practices

Forecasts, such as those presented in this article, can only be as reliable as the data upon which they are based, and as long as the underlying dynamics driving the pace of progress remain unaltered. We detail below how these two sources of uncertainty could benefit from further research attention from the benchmarking and evaluation communities.

Benchmark validity. Do benchmark improvements reflect genuine capability gains, or artifacts of optimization, contamination, or narrow task-specific learning? This concern is not novel; prior work has called for harder benchmarks targeting real-world tasks, long-horizon planning, and dynamic evaluation protocols (Mazeika et al., 2025; White et al., 2025). Our analysis already includes recently developed benchmarks designed to resist gaming, but connecting these scores to real-world impact remains understudied. Risk modeling efforts by Touzet et al. (2025); Barrett et al. (2025); Murray et al. (2025) to elicit expert knowledge in order to link capability metrics to potential harms represent a promising direction.

AI R&D acceleration. To what extent can AI systems automate AI research itself, potentially accelerating the pace of progress beyond current trends? Benchmarks measuring research capabilities (hypothesis generation, experiment design, code optimization) remain at an early stage (Kwa et al., 2025; Ihle, 2025). We encourage the development of realistic evaluations for AI R&D capabilities, as these may provide early warning of acceleration dynamics and improve medium-horizon projections.

4 Alternative Views

4.1 Benchmarks Can Be Gamed

Objection: Benchmark progress may reflect contamination (training on test data), reward-hacking on poorly designed tasks, and/or benchmark optimization (prompt engineering, fine-tuning on similar tasks, tuning scaffolds to evaluation formats) by AI companies incentivized to showcase impressive results with each new model release (Robison, 2025). Contamination in particular is a well-documented concern: Balloccu et al. (2024) show that several widely used benchmarks have appeared in training corpora. If contamination and benchmark hacking inflate scores, especially for older benchmarks with longer exposure to training pipelines, then our hierarchical model could propagate these inflated trajectories to newer, less contaminated benchmarks.

Response: We acknowledge these concerns but note several mitigating factors: (1) The saturation trends presented in this article are consistent across 98 benchmarks from four main sources (Epoch AI, Scale AI, RAND, Kaggle). (2) These benchmarks are either run internally by these organizations or sourced from carefully selected benchmark developers (Epoch AI, 2024) to limit contamination. (3) Many benchmarks saturate below 100%, which is consistent with labeling errors but inconsistent with wholesale answer memorization. (4) Newer benchmarks designed specifically to resist gaming (ARC-AGI, Remote Labor Index) show similar trajectory patterns (Chollet, 2019; Mazeika et al., 2025). (5) Some benchmarks are never publicly released, such as the UK AI Security Institute’s capture-the-flag suites and cyber ranges, which rules out direct contamination. While no benchmark is immune to all criticism, the convergent pattern across diverse, independently maintained evaluations provides evidence beyond any single benchmark. Furthermore, fitting each benchmark independently (without hierarchical pooling) yields similar conclusions (Supp. Table 3, $\geq 91\%$ of benchmarks saturated by 2030 for all 8 model variants) with worse cross-validation fit (Supp. Table 2), suggesting that cross-benchmark information sharing does not artificially inflate projections for newer benchmarks.

4.2 Progress May Plateau

Objection: Scaling may hit diminishing returns. Data constraints, compute costs, or algorithmic limitations could slow progress before current or future benchmarks saturate. Concerns about a “data wall” (exhaustion of high-quality training data), plateauing returns from simply increasing compute (either for pre-training, post-training or inference scaling, see Ord (2025)), and the rising costs of frontier training runs all suggest that the current pace of improvement may not be sustainable. Each new scaling paradigm may buy time but itself face diminishing returns.

Response: This is possible, and our projections carry substantial uncertainty. However, (1) predicted slowdowns in the past decade have repeatedly failed to materialize, (2) new scaling paradigms (reasoning models, inference-time compute) continue to unlock progress, as the accelerating absolute investment in AI compute and research currently compensates for diminishing returns, and (3) looking at each potential bottleneck individually, scaling seems to be on track to continue until at least the end of the decade (Sevilla et al., 2024).

4.3 Benchmarks Do Not Measure General Intelligence

Objection: Benchmark saturation does not imply human-level intelligence. Models may achieve high scores through pattern matching, heuristics, or memorization rather than genuine understanding. This is a longstanding concern in AI evaluation (Chollet, 2019), since high benchmark scores may reflect narrow task-specific optimization rather than the flexible, transferable reasoning that characterizes human cognition. A model that solves FrontierMath problems may do so through learned solution templates rather than on-the-fly reasoning, as the impressive math skills of recent AI models seem to rely more on their extensive knowledge of the literature and of known techniques than on reasoning depth. Correspondingly, AI progress is “jagged”, superhuman on some tasks yet subhuman on others. This heterogeneity could persist, preventing AGI-like systems that could reliably replace full human jobs or achieve their goals autonomously far outside of their training distribution. More generally, the field has repeatedly designated tests to measure machine intelligence, seen them passed, and moved the goalposts. Machines now pass unrestricted imitation games of the kind Turing described (Turing, 1950) and no discontinuity followed, so the benchmarks studied here may be the same mistake.

Response: Benchmark performance is indeed an imperfect proxy for general intelligence; this is why we frame our position around “measurable cognitive tasks” rather than AGI. However, (1) many recent benchmarks specifically target capabilities thought to require flexible and general reasoning (ARC Prize, 2025; Wang et al., 2025a) or the ability to handle real-world under-specified tasks (Mazeika et al., 2025), (2) as gaps are progressively closing, the breadth of saturation across diverse tasks becomes more and more difficult to explain by narrow optimization alone, and (3) if AI reaches superhuman performance on AI R&D itself, even if it is short of general intelligence, remaining gaps may close rapidly through models able to accelerate their own development.

Lastly, from a practical standpoint, systems that exceed human performance on most measurable cognitive tasks could start to have irreversible global impacts regardless of whether they possess true general intelligence. Nevertheless, we acknowledge that this is a crux and a significant source of uncertainty in predicting the consequences of benchmark saturation.

4.4 Benchmark Saturation and Superhuman Scores Do Not Entail Irreversible Global Impacts

Objection: First, benchmark saturation reflects an intrinsic property of the benchmarks’ construction based on a fixed set of tasks. So even saturating all existing benchmarks and exceeding expert performance may not translate to real-world transformative capabilities. One reason is that as our analysis is limited to cognitive tasks evaluated on online benchmarks, it does not cover embodied or social capabilities which may remain bottlenecks for real-world impact. AI systems have matched or exceeded radiologist performance on medical imaging benchmarks for years, yet the demand for radiologists is greater than ever. Second, even with these wider capabilities unlocked, numerous frictions and regulatory constraints will likely delay their deployment in society. Finally, humans have always created tools that exceed their own capabilities in specific domains. Computers can process information much faster, and planes travel at superhuman speeds. AI is the latest such technology, and what its development warrants is proportionate regulation (as for the aviation industry).

Response: We agree that benchmark saturation is a necessary but not sufficient condition for irreversible real-world impact, and address each argument in turn. On the significance of benchmark saturation: the benchmarks in this article do have ceilings, so their eventual saturation is indeed expected. However, the *speed* of saturation is informative. Several benchmarks in our set were designed to resist rapid saturation (FrontierMath, Humanity’s Last Exam and its HLE Diamond subset, the ARC-AGI series). That most of these benchmarks could be approaching saturation before 2028, with teams of experts on FrontierMath already well below the latest AI models, would have been considered a very optimistic prediction a few years ago. Furthermore, the benchmarks most relevant to our security argument (cybersecurity, AI R&D automation) do not require embodiment to translate into real-world impact. On deployment frictions: these are real for many beneficial applications (regulatory approval, barriers to adoption, etc.), but they are greatly

reduced both for AI companies deploying AI R&D capabilities internally and for adversarial actors. Our security concerns primarily target these faster pathways. On the tools analogy: the comparison to calculators or planes understates three properties that frontier AI systems are currently acquiring and that have not been combined before. These are (a) general performance across dozens of cognitive domains, (b) autonomous agentic operation, and (c) the potential to accelerate their own development. We believe that this combination, paired with the current absence of reliable control methods, distinguishes frontier AI from prior technologies.

More broadly, the aim of our paper is to provide evidence on the size of the window for preventive action. The consequences of saturating cybersecurity, biology, chemistry, AI R&D and remote work benchmarks are uncertain, but we note that this progress is for the most part irreversible (more so when considering the fast following of open-source models). So waiting for the gap between benchmarks and real-world impact to resolve means allowing this window for collective action to close.

4.5 What Would Change Our Mind

Several developments would substantially weaken our position. The most direct would be a sustained plateau in benchmark progress, lasting more than two years across multiple hard benchmarks, or evidence that current architectures face fundamental limits on the capability dimensions central to expert-level AI R&D automation. Our argument would also lose much of its force if benchmark performance were shown to diverge systematically from real-world task performance, for instance through a stall of the recent progress on the Remote Labor Index (Mazeika et al., 2025), where the best score is 21% in September 2026, or the absence of any noticeable effect of AI automation on U.S. economic growth by 2030.

5 Limitations

Extrapolation uncertainty. All forecasting involves extrapolation. Our Bayesian approach quantifies some sources of uncertainty, but it does not explicitly integrate the many known and unknown factors that may disrupt future trajectories in either direction (scaling bottlenecks, algorithmic breakthroughs, AI R&D automation, geopolitical conflicts, international agreements, etc.). An acceleration already underway would in part be absorbed by our fits, since k_i is estimated from the observed trajectory and the shape parameter lets the accelerating and decelerating phases differ in length, unlike a logistic. However, the model cannot represent a discontinuity where automated research would suddenly raise growth rates.

Interval width at long horizons. Our credible intervals understate uncertainty. Coverage of the nominal 80% interval is 74% at a horizon of 1.7 years, and lower at the earlier cutoffs, which retain only 8 to 11 benchmarks. At the 2025 and 2024 cutoffs nearly all misses fall above the interval, largely because the model underestimated the recent pace of AI progress with the rise of reasoning models; on the benchmarks that weigh most in our set it has therefore erred by projecting saturation too late rather than too early (Appendix C.4).

Elicitation gap. Benchmark scores underestimate latent model capabilities due to suboptimal prompting, scaffolding, evaluation conditions, or even sandbagging (i.e., strategic underperformance, see van der Weij et al. (2025)). Our skewed likelihood model partially addresses this issue by inferring a latent frontier capability mostly above the observed top-3 scores. Nonetheless, if substantial capabilities remain hidden due to inadequate evaluation protocols or secrecy in AI development, our projections would be conservative. The true trajectory could thus be faster than our estimates suggest.

Modeling extensions. Several extensions could improve forecast accuracy: (1) incorporating compute scaling as a predictor, linking benchmark progress to training resources (Kaplan et al., 2020; Ruan et al., 2024); (2) modeling latent capability dimensions that manifest across multiple benchmarks (Burnell et al., 2023; Kipnis et al., 2025; Ho et al., 2025; Polo et al., 2025; Pimpale et al., 2025); (3) integrating information about model architectures and training approaches. We chose a simpler model to maintain interpretability, but richer models may become feasible as more data accumulates.

Scope of analysis. Our analysis is limited to cognitive tasks evaluable through benchmarks. Embodiment, physical manipulation, and social interactions may remain critical bottlenecks for real-world impact even if cognitive benchmarks saturate. The link between benchmark saturation and transformative real-world capability remains an open question.

Benchmark evolution. Our analysis covers only existing benchmarks, and harder task sets are continuously being developed. However, in many domains, frontier models already match or exceed expert human performance, raising questions about how much headroom remains. Designing “superhuman” evaluations

requires either (1) tasks where ground truth is verifiable without human judgment (e.g., mathematical proofs, code execution), or (2) aggregating across many human experts (Phan et al., 2025). Some benchmarks already approximate this standard by comparing AI to real-world human task completion. A potential next step to forecast AI progress beyond current benchmarks is to extrapolate higher-level properties of the evaluation tasks (e.g., human-equivalent time horizon, see Kwa et al. (2025), or task difficulty level, see Zhou et al. (2026)).

6 Conclusion

We have argued that the current AI development trajectory leads to the saturation of most existing cognitive benchmarks by 2030, approaching or exceeding human expert performance across a broad range of measurable cognitive tasks. Given the state of our understanding of and control over these systems, the cost of inaction could be severe. This trajectory is not inevitable, as it results from choices that can still be influenced through coordinated action, but the window is closing rapidly.

We call on the ML community and institutional actors to engage with this possibility and act accordingly: differentially accelerating safety research, monitoring critical AI capabilities, and developing verification mechanisms as part of a global effort to provide security guarantees commensurate with the possibility of superhuman AIs in the coming years.

Reproducibility Statement

Benchmark data are publicly available from Epoch AI (Epoch AI, 2024), Scale AI (Scale AI, 2025b), RAND (Dev et al., 2025), Kaggle Open Benchmarks (Kaggle, 2026) and the Cybench leaderboard (Zhang et al., 2025). Epoch AI’s benchmark data are licensed under CC BY 4.0, and the results it compiles from third parties keep their original terms; the Kaggle Open Benchmarks boards are released under Apache 2.0; scores from the RAND report are reproduced for non-commercial research under RAND’s terms, and those from the Scale AI SEAL leaderboards and the Cybench leaderboard, which carry no open license, are reproduced as attributed factual results.² The curated scores used here (data cutoff October 1, 2026), together with the code for model fitting and visualization, are available at <https://github.com/General-Purpose-AI-Policy-Lab/benchmark-forecasting>.

Acknowledgments

We thank the anonymous reviewers for their comments, which substantially improved this paper. This work was supported by the Direction générale des relations internationales et de la stratégie (DGRIS) of the French Ministry of the Armed Forces and Veterans, through its 2026 grant programme for strategic research. The authors declare no competing interests.

References

- Oriol Abril-Pla, Virgile Andreani, Colin Carroll, Larry Dong, Christopher J. Fongesbeck, Maxim Kochurov, Ravin Kumar, Junpeng Lao, Christian C. Luhmann, Osvaldo A. Martin, Michael Osthege, Ricardo Vieira, Thomas Wiecki, and Robert Zinkov. PyMC: a modern, and comprehensive probabilistic programming framework in Python. *PeerJ Comput. Sci.*, 9:e1516, September 2023. ISSN 2376-5992. doi: 10.7717/peerj-cs.1516. URL <https://peerj.com/articles/cs-1516>.
- Tom Adamczewski. OEIS Open: How many conjectures can language models turn into theorems?, August 2026. URL <https://arxiv.org/abs/2608.11941>. Version Number: 2.
- Tom Adamczewski and Thomas F. Bloom. FrontierMath Erdős, September 2026. URL <https://arxiv.org/abs/2609.25050>. Version Number: 1.
- Tom Adamczewski, David Owen, David Rein, Florian Brand, Giles Edkins, Allen Hart, and Daniel O’Connell. MirrorCode: AI can rebuild entire programs from behavior alone, July 2026. URL <https://arxiv.org/abs/2606.30182>. Version Number: 2.
- Aider. Aider LLM Leaderboards, 2024. URL <https://aider.chat/docs/leaderboards/>.

²Per-source terms and attribution are listed in the repository’s `NOTICE.md`; our code and outputs are released under CC BY 4.0, which does not extend to the upstream scores.

- AIISI. Frontier AI Trends Report. Technical report, AI Security Institute, 2025. URL <https://www.aisi.gov.uk/frontier-ai-trends-report>.
- Afra Feyza Akyürek, Xinming Tu, Alec Gutmanstein, Jason Qin, Divyansh Agarwal, Sofia Monasdotter, Sergey Chekhov, Brenda Hernandez Villegas, Kirill Chugunov, Judah Engel, Veronica Chatrath, Oscar Kavanagh, Geobio Boo, Ernesto Hernandez, Ying Liu, Emily Xue, Aakash Sabharwal, Daniel Yue Zhang, Zainab Doctor, Yuanhao Qu, Yunzhong He, and Sami Hassaan. DrugDiscoveryBench: Can Coding Agents Assist Early-Stage Drug Discovery? Technical report, Scale AI, 2026. URL <https://static.scale.com/uploads/6691558a94899f2f65a87a75/DrugDiscoveryBench.pdf>.
- Dario Amodei, Chris Olah, Jacob Steinhardt, Paul Christiano, John Schulman, and Dan Mané. Concrete Problems in AI Safety, July 2016. URL <http://arxiv.org/abs/1606.06565>. arXiv:1606.06565 [cs].
- ARC Prize. ARC-AGI-1, 2019. URL <https://arcprize.org/arc-agi/1/>.
- ARC Prize. ARC-AGI-2, 2025. URL <https://arcprize.org/arc-agi/2/>.
- Simone Balloccu, Patrícia Schmidtová, Mateusz Lango, and Ondřej Dušek. Leak, Cheat, Repeat: Data Contamination and Evaluation Malpractices in Closed-Source LLMs, February 2024. URL <http://arxiv.org/abs/2402.03927>. arXiv:2402.03927 [cs].
- Chaithanya Bandi, Razvan-Gabriel Dumitru, Ben Hertzberg, Divyansh Agarwal, Geobio Boo, Tejas Polakam, Sami Hassaan, Jeff Da, HiJae Kim, Vipul Gupta, Manasi Sharma, Andrew Park, Martin Dimakis, Ernesto Gabriel Hernandez Montoya, Dan Rambado, Ivan Salazar, Rafael Cruz, MohammadHossein Rezaei, Chetan Rane, Ben Levin, Daniel Yue Zhang, Brad Kenstler, and Bing Liu. MCP-Atlas: A Large-Scale Benchmark for Tool-Use Competency with Real MCP Servers, May 2026. URL <http://arxiv.org/abs/2602.00933>. arXiv:2602.00933 [cs.SE].
- Steve Barrett, Malcolm Murray, Otter Quarks, Matthew Smith, Jakub Kryš, Siméon Campos, Alejandro Tlaie Boria, Chloé Touzet, Sevan Hayrapet, Fred Heiding, Omer Nevo, Adam Swanda, Jair Aguirre, Asher Brass Gershovich, Eric Clay, Ryan Fetterman, Mario Fritz, Marc Juarez, Vasilios Mavroudis, and Henry Papadatos. Toward Quantitative Modeling of Cybersecurity Risks Due to AI Misuse, December 2025. URL <http://arxiv.org/abs/2512.08864>. arXiv:2512.08864 [cs].
- Yoshua Bengio, Sören Mindermann, Daniel Privitera, Tamay Besiroglu, Rishi Bommasani, Stephen Casper, Yejin Choi, Philip Fox, Ben Garfinkel, Danielle Goldfarb, Hoda Heidari, Anson Ho, Sayash Kapoor, Leila Khalatbari, Shayne Longpre, Sam Manning, Vasilios Mavroudis, Mantas Mazeika, Julian Michael, Jessica Newman, Kwan Yee Ng, Chinaasa T. Okolo, Deborah Raji, Girish Sastry, Elizabeth Seger, Theodora Skeadas, Tobin South, Emma Strubell, Florian Tramèr, Lucia Velasco, Nicole Wheeler, Daron Acemoglu, Olubayo Adekanmbi, David Dalrymple, Thomas G. Dietterich, Edward W. Felten, Pascale Fung, Pierre-Olivier Gourinchas, Fredrik Heintz, Geoffrey Hinton, Nick Jennings, Andreas Krause, Susan Leavy, Percy Liang, Teresa Ludermir, Vidushi Marda, Helen Margetts, John McDermid, Jane Munga, Arvind Narayanan, Alondra Nelson, Clara Neppel, Alice Oh, Gopal Ramchurn, Stuart Russell, Marietje Schaake, Bernhard Schölkopf, Dawn Song, Alvaro Soto, Lee Tiedrich, Gaël Varoquaux, Andrew Yao, Ya-Qin Zhang, Fahad Albalawi, Marwan Alserkal, Olubunmi Ajala, Guillaume Avrin, Christian Busch, André Carlos Ponce de Leon Ferreira de Carvalho, Bronwyn Fox, Amandeep Singh Gill, Ahmet Halit Hatip, Juha Heikkilä, Gill Jolly, Ziv Katzir, Hiroaki Kitano, Antonio Krüger, Chris Johnson, Saif M. Khan, Kyoung Mu Lee, Dominic Vincent Ligot, Oleksii Molchanovskiy, Andrea Monti, Nusu Mwamanzu, Mona Nemer, Nuria Oliver, José Ramón López Portillo, Balaraman Ravindran, Raquel Pezoa Rivera, Hammam Riza, Crystal Rugege, Ciarán Seoighe, Jerry Sheehan, Haroon Sheikh, Denise Wong, and Yi Zeng. International AI Safety Report. Technical Report arXiv:2501.17805, International AI Safety Report, January 2025. URL <http://arxiv.org/abs/2501.17805>. arXiv:2501.17805 [cs].
- Yonatan Bisk, Rowan Zellers, Ronan Le Bras, Jianfeng Gao, and Yejin Choi. PIQA: Reasoning about Physical Commonsense in Natural Language. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 7432–7439, April 2020. doi: 10.1609/aaai.v34i05.6239. URL <https://ojs.aaai.org/index.php/AAAI/article/view/6239>.
- Chase Brower. Visual Physics Comprehension Test, 2025. URL <https://cbrower.dev/vpct>.
- Ryan Burnell, Han Hao, Andrew R. A. Conway, and Jose Hernandez Orallo. Revealing the structure of language model capabilities, June 2023. URL <http://arxiv.org/abs/2306.10062>. arXiv:2306.10062 [cs].
- Stephen Casper, Xander Davies, Claudia Shi, Thomas Krendl Gilbert, Jérémy Scheurer, Javier Rando, Rachel Freedman, Tomasz Korbak, David Lindner, Pedro Freire, Tony Wang, Samuel Marks, Charbel-Raphaël Segerie, Micah Carroll, Andi Peng, Phillip Christoffersen, Mehul Damani, Stewart Slocum, Usman Anwar, Anand Siththaranjan, Max Nadeau, Eric J. Michaud, Jacob Pfau, Dmitrii Krashenninnikov, Xin Chen,

- Lauro Langosco, Peter Hase, Erdem Bıyık, Anca Dragan, David Krueger, Dorsa Sadigh, and Dylan Hadfield-Menell. Open Problems and Fundamental Limitations of Reinforcement Learning from Human Feedback, September 2023. URL <http://arxiv.org/abs/2307.15217>. arXiv:2307.15217 [cs].
- ccmdi. GeoBench, January 2026. URL <https://github.com/ccmdi/geobench>. original-date: 2025-03-22T13:27:48Z.
- Arjun Chakraborty, Sandra Ho, Adam Cook, and Manuel Meléndez. CTI-REALM: Benchmark to Evaluate Agent Performance on Security Detection Rule Generation Capabilities, 2026. URL <https://arxiv.org/abs/2603.13517>. Version Number: 2.
- Timothée Chauvin, Alexander Barry, Jean-Stanislas Denain, and Anson Ho. Are Mythos’ cyber capabilities overhyped?, June 2026. URL <https://epoch.ai/gradient-updates/are-mythos-cyber-capabilities-overhyped>. Published: Epoch AI, Gradient Updates.
- Evan Chen. OTIS Mock AIME 2025 Report. Technical report, 2025. URL <https://web.evanchen.cc/exams/sols-OTIS-Mock-AIME-2025.pdf>.
- François Chollet. On the Measure of Intelligence, November 2019. URL <http://arxiv.org/abs/1911.01547>. arXiv:1911.01547 [cs].
- Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have Solved Question Answering? Try ARC, the AI2 Reasoning Challenge, March 2018. URL <http://arxiv.org/abs/1803.05457>. arXiv:1803.05457 [cs].
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training Verifiers to Solve Math Word Problems, November 2021. URL <http://arxiv.org/abs/2110.14168>. arXiv:2110.14168 [cs].
- Cognition. FrontierCode Leaderboard, July 2026. URL <https://cognition.com/frontiercode>.
- Emery Cooper, Caspar Oesterheld, Linh Chi Nguyen, Alexander Kastner, and Ethan Perez. A dataset of rated conceptual arguments, July 2026. URL <https://arxiv.org/abs/2607.27499>. Version Number: 1.
- David "davidad" Dalrymple, Joar Skalse, Yoshua Bengio, Stuart Russell, Max Tegmark, Sanjit Seshia, Steve Omohundro, Christian Szegedy, Ben Goldhaber, Nora Ammann, Alessandro Abate, Joe Halpern, Clark Barrett, Ding Zhao, Tan Zhi-Xuan, Jeannette Wing, and Joshua Tenenbaum. Towards Guaranteed Safe AI: A Framework for Ensuring Robust and Reliable AI Systems, July 2024. URL <http://arxiv.org/abs/2405.06624>. arXiv:2405.06624 [cs].
- Datacurve. DeepSWE, 2026. URL <https://deepswe.datacurve.ai/>.
- Xiang Deng, Jeff Da, Edwin Pan, Yannis Yiming He, Charles Ide, Kanak Garg, Niklas Lauffer, Andrew Park, Nitin Pasari, Chetan Rane, Karmini Sampath, Maya Krishnan, Srivatsa Kundurthy, Sean Hendryx, Zifan Wang, Vijay Bharadwaj, Jeff Holm, Raja Aluri, Chen Bo Calvin Zhang, Noah Jacobson, Bing Liu, and Brad Kenstler. SWE-Bench Pro: Can AI Agents Solve Long-Horizon Software Engineering Tasks?, November 2025. URL <http://arxiv.org/abs/2509.16941>. arXiv:2509.16941 [cs].
- Sunishchal Dev, Charles Teague, Grant Ellison, Kyle Brady, Ying-Chiang Jeffrey Lee, Sarah L. Gebauer, Henry Alexander Bradley, Dawid Maciorowski, Bria Persaud, Jordan Despanie, Barbara Del Castello, Alyssa Worland, Michael Miller, Adrian Salas, Dave Nguyen, James Liu, Jason Johnson, Andrew Sloan, Will Stonehouse, Travis Merrill, Thomas Goode, Greg McKelvey, and Ella Guest. Toward Comprehensive Benchmarking of the Biological Knowledge of Frontier Large Language Models. Technical report, RAND Corporation, 2025. URL https://www.rand.org/pubs/research_reports/RRA3797-1.html.
- Shihan Dou, Ming Zhang, Zhangyue Yin, Chenhao Huang, Yujiong Shen, Junzhe Wang, Jiayi Chen, Yuchen Ni, Junjie Ye, Cheng Zhang, Huaibing Xie, Jianglu Hu, Shaolei Wang, Weichao Wang, Yanling Xiao, Yiting Liu, Zenan Xu, Zhen Guo, Pluto Zhou, Tao Gui, Zuxuan Wu, Xipeng Qiu, Qi Zhang, Xuanjing Huang, Yu-Gang Jiang, Di Wang, and Shunyu Yao. CL-bench: A Benchmark for Context Learning, 2026. URL <https://arxiv.org/abs/2602.03587>. Version Number: 1.
- Epoch AI. AI Benchmarking Hub, November 2024. URL <https://epoch.ai/benchmarks/use-this-data>.
- Epoch AI. CadEval, 2025a. URL <https://epoch.ai/benchmarks/cad-eval>.
- Epoch AI. Data on Frontier AI Data Centers, September 2025b. URL <https://epoch.ai/data/data-centers>.
- Epoch AI. Fiction.LiveBench, February 2025c. URL <https://epoch.ai/benchmarks/fictionlivebench>.
- Epoch AI. FrontierMath, 2025d. URL <https://epoch.ai/benchmarks/frontiermath>.

- Epoch AI. OTIS Mock AIME 2024-2025, 2025e. URL <https://epoch.ai/benchmarks/otis-mock-aime-2024-2025>.
- Epoch AI. Earthborne Rangers (EBR-bench), July 2026a. URL <https://epoch.ai/benchmarks/ebr-bench>. Publication Title: Epoch AI.
- Epoch AI. Furniture Assembly, September 2026b. URL <https://epoch.ai/benchmarks/furniture-assembly>. Publication Title: Epoch AI.
- Epoch AI. Mystery Game Puzzles, July 2026c. URL <https://epoch.ai/benchmarks/mystery-game-puzzles>. Publication Title: Epoch AI.
- Ege Erdil and Tamay Besiroglu. Algorithmic progress in computer vision, August 2023. URL <http://arxiv.org/abs/2212.05153>. arXiv:2212.05153 [cs].
- Alexander R. Fabbri, Diego Mares, Jorge Flores, Meher Mankikar, Ernesto Hernandez, Dean Lee, Bing Liu, and Chen Xing. MultiNRC: A Challenging and Native Multilingual Reasoning Evaluation Benchmark for LLMs, July 2025. URL <http://arxiv.org/abs/2507.17476>. arXiv:2507.17476 [cs].
- FutureSearch, Nikos I. Bosse, Jon Evans, Robert G. Gamber, Daniel Hnyk, Peter Mühlbacher, Lawrence Phillips, Dan Schwarz, and Jack Wildman. Deep Research Bench: Evaluating AI Web Research Agents, 2025. URL <https://arxiv.org/abs/2506.06287>. Version Number: 1.
- Suhaas Garre, Emily Ritchie, Sushant Mehta, and Edwin Chen. GDP.pdf: Benchmarking Grounded Multimodal Reasoning over Professional PDF Documents, July 2026. URL <https://arxiv.org/abs/2607.11192>. Version Number: 3.
- Advait Gosai, Tyler Vuong, Utkarsh Tyagi, Steven Li, Wenjia You, Miheer Bavare, Arda Uçar, Zhongwang Fang, Brian Jang, Bing Liu, and Yunzhong He. Audio MultiChallenge: A Multi-Turn Evaluation of Spoken Dialogue Systems on Natural Human Interaction, December 2025. URL <http://arxiv.org/abs/2512.14865>. arXiv:2512.14865 [cs].
- Katja Grace, John Salvatier, Allan Dafoe, Baobao Zhang, and Owain Evans. When Will AI Exceed Human Performance? Evidence from AI Experts, May 2018. URL <http://arxiv.org/abs/1705.08807>. arXiv:1705.08807 [cs].
- Katja Grace, Harlan Stewart, Julia Fabienne Sandkühler, Stephen Thomas, Ben Weinstein-Raun, Jan Brauner, and Richard C. Korzekwa. Thousands of AI Authors on the Future of AI. *Journal of Artificial Intelligence Research*, 84, October 2025. ISSN 1076-9757. doi: 10.1613/jair.1.19087. URL <http://arxiv.org/abs/2401.02843>. arXiv:2401.02843 [cs].
- Xingang Guo, Utkarsh Tyagi, Advait Gosai, Paula Vergara, Jayeon Park, Ernesto Gabriel Hernández Montoya, Chen Bo Calvin Zhang, Bin Hu, Yunzhong He, Bing Liu, and Rakshith Sharma Srinivasa. Beyond Seeing: Evaluating Multimodal LLMs on Tool-Enabled Image Perception, Transformation, and Reasoning, October 2025. URL <http://arxiv.org/abs/2510.12712>. arXiv:2510.12712 [cs].
- Lukas Haas, Gal Yona, Giovanni D’Antonio, Sasha Goldshtein, and Dipanjan Das. SimpleQA Verified: A Reliable Factuality Benchmark to Measure Parametric Knowledge, September 2025. URL <http://arxiv.org/abs/2509.07968>. arXiv:2509.07968 [cs].
- A. C. Harvey. Time Series Forecasting Based on the Logistic Curve. *Journal of the Operational Research Society*, 35(7):641–646, July 1984. ISSN 0160-5682. doi: 10.1057/jors.1984.128. URL <https://doi.org/10.1057/jors.1984.128>. _eprint: <https://doi.org/10.1057/jors.1984.128>.
- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring Massive Multitask Language Understanding, 2020. URL <https://arxiv.org/abs/2009.03300>. Version Number: 3.
- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring Mathematical Problem Solving With the MATH Dataset, November 2021. URL <http://arxiv.org/abs/2103.03874>. arXiv:2103.03874 [cs].
- Yann Henon. Surface Evolver Bench, 2026. URL <https://yhenon.github.io/surface-evolver-llm-eval/>.
- Anson Ho, Jean-Stanislas Denain, David Atanasov, Samuel Albanie, and Rohin Shah. A Rosetta Stone for AI Benchmarks, November 2025. URL <http://arxiv.org/abs/2512.00193>. arXiv:2512.00193 [cs].
- Håvard Tveit Ihle. WeirdML, 2025. URL <https://htihle.github.io/weirdml.html>.
- Irregular. CyScenarioBench: Evaluating LLM Cyber Capabilities Through Scenario-Based Benchmarking, 2026. URL <https://irregular.com/research/cyscenariobench>.

- Carlos E. Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik R. Narasimhan. SWE-bench: Can Language Models Resolve Real-world Github Issues? In *Proc. of ICLR*, pages 1–15. OpenReview.net, 2024. URL <https://openreview.net/forum?id=VTF8yNQm66>.
- Mandar Joshi, Eunsol Choi, Daniel Weld, and Luke Zettlemoyer. TriviaQA: A Large Scale Distantly Supervised Challenge Dataset for Reading Comprehension. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1601–1611, Vancouver, Canada, 2017. Association for Computational Linguistics. doi: 10.18653/v1/P17-1147. URL <http://aclweb.org/anthology/P17-1147>.
- Kaggle. Kaggle Benchmarks: Open Benchmarks leaderboards (MMLU, MMLU-Pro, SimpleQA Verified), 2026. URL <https://www.kaggle.com/benchmarks/open-benchmarks/mmlu>.
- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling Laws for Neural Language Models, January 2020. URL <http://arxiv.org/abs/2001.08361>. arXiv:2001.08361 [cs].
- Alex Kipnis, Konstantinos Voudouris, Luca M. Schulze Buschoff, and Eric Schulz. metabench – A Sparse Benchmark of Reasoning and Knowledge in Large Language Models, February 2025. URL <http://arxiv.org/abs/2407.12844>. arXiv:2407.12844 [cs].
- Simas Kučinskas, Josh Rosenberg, Rebecca Ceppas de Castro, Zach Jacobs, Jordan Canedy, Philip E Tetlock, and Ezra Karger. Assessing Near-Term Accuracy in the Existential Risk Persuasion Tournament. Technical report, Forecasting Research Institute, September 2025. URL <https://forecastingresearch.org/near-term-xpt-accuracy>.
- Thomas Kwa, Ben West, Joel Becker, Amy Deng, Katharyn Garcia, Max Hasin, Sami Jawhar, Megan Kinniment, Nate Rush, Sydney Von Arx, Ryan Bloom, Thomas Broadley, Haoxing Du, Brian Goodrich, Nikola Jurkovic, Luke Harold Miles, Seraphina Nix, Tao Lin, Neev Parikh, David Rein, Lucas Jun Koba Sato, Hjalmar Wijk, Daniel M. Ziegler, Elizabeth Barnes, and Lawrence Chan. Measuring AI Ability to Complete Long Tasks, March 2025. URL <http://arxiv.org/abs/2503.14499>. arXiv:2503.14499 [cs].
- Jon M. Laurent, Joseph D. Janizek, Michael Ruzo, Michaela M. Hinks, Michael J. Hammerling, Siddharth Narayanan, Manvitha Ponnampati, Andrew D. White, and Samuel G. Rodrigues. LAB-Bench: Measuring Capabilities of Language Models for Biology Research, July 2024. URL <http://arxiv.org/abs/2407.10362>. arXiv:2407.10362 [cs].
- Seunghyun Lee and David Brumley. ExploitBench, 2026. URL <https://exploitbench.ai/>.
- Nathaniel Li, Alexander Pan, Anjali Gopal, Summer Yue, Daniel Berrios, Alice Gatti, Justin D. Li, Ann-Kathrin Dombrowski, Shashwat Goel, Long Phan, Gabriel Mukobi, Nathan Helm-Burger, Rassin Lababidi, Lennart Justen, Andrew B. Liu, Michael Chen, Isabelle Barrass, Oliver Zhang, Xiaoyuan Zhu, Rishub Tamirisa, Bhruhu Bharathi, Adam Khoja, Zhenqi Zhao, Ariel Herbert-Voss, Cort B. Breuer, Samuel Marks, Oam Patel, Andy Zou, Mantas Mazeika, Zifan Wang, Palash Oswal, Weiran Lin, Adam A. Hunt, Justin Tienken-Harder, Kevin Y. Shih, Kemper Talley, John Guan, Russell Kaplan, Ian Steneker, David Campbell, Brad Jokubaitis, Alex Levinson, Jean Wang, William Qian, Kallol Krishna Karmakar, Steven Basart, Stephen Fitz, Mindy Levine, Ponnurangam Kumaraguru, Uday Tupakula, Vijay Varadharajan, Ruoyu Wang, Yan Shoshitaishvili, Jimmy Ba, Kevin M. Esvelt, Alexandr Wang, and Dan Hendrycks. The WMDP Benchmark: Measuring and Reducing Malicious Use With Unlearning, May 2024a. URL <http://arxiv.org/abs/2403.03218>. arXiv:2403.03218 [cs].
- Qintong Li, Leyang Cui, Xueliang Zhao, Lingpeng Kong, and Wei Bi. GSM-Plus: A Comprehensive Benchmark for Evaluating the Robustness of LLMs as Mathematical Problem Solvers, July 2024b. URL <http://arxiv.org/abs/2402.19255>. arXiv:2402.19255 [cs].
- Xi Victoria Lin, Chenglong Wang, Luke Zettlemoyer, and Michael D. Ernst. NL2Bash: A Corpus and Semantic Parser for Natural Language Interface to the Linux Operating System, 2018. URL <https://arxiv.org/abs/1802.08979>. Version Number: 2.
- Antoine Maier, Aude Maier, and Tom David. Take Goodhart Seriously: Principled Limit on General-Purpose AI Optimization, October 2025. URL <http://arxiv.org/abs/2510.02840>. arXiv:2510.02840 [cs].
- Mantas Mazeika, Alice Gatti, Cristina Menghini, Udari Madhushani Sehwal, Shivam Singhal, Yury Orlovskiy, Steven Basart, Manasi Sharma, Denis Peskoff, Elaine Lau, Jaehyuk Lim, Lachlan Carroll, Alice Blair, Vinaya Sivakumar, Sumana Basu, Brad Kenstler, Yuntao Ma, Julian Michael, Xiaoke Li, Oliver Ingebrechtsen, Aditya Mehta, Jean Mottola, John Teichmann, Kevin Yu, Zaina Shaik, Adam Khoja, Richard Ren, Jason Hausenloy, Long Phan, Ye Htet, Ankit Aich, Tahseen Rabbani, Vivswan Shah, Andriy Novykov, Felix Binder, Kirill Chugunov, Luis Ramirez, Matias Geralnik, Hernán Mesura, Dean Lee, Ed-Yeremai Hernandez

- Cardona, Annette Diamond, Summer Yue, Alexandr Wang, Bing Liu, Ernesto Hernandez, and Dan Hendrycks. Remote Labor Index: Measuring AI Automation of Remote Work, October 2025. URL <http://arxiv.org/abs/2510.26787>. arXiv:2510.26787 [cs].
- Lech Mazur. lechmazur/writing, January 2026. URL <https://github.com/lechmazur/writing>. original-date: 2025-01-05T08:48:04Z.
- Mechanize. GBA Eval, 2026. URL <https://gbaeval.com/>.
- Mike A. Merrill, Alexander G. Shaw, Nicholas Carlini, Boxuan Li, Harsh Raj, Ivan Bercovich, Lin Shi, Jeong Yeon Shin, Thomas Walshe, E. Kelly Buchanan, Junhong Shen, Guanghao Ye, Haowei Lin, Jason Poulos, Maoyu Wang, Marianna Nezhurina, Jenia Jitsev, Di Lu, Orfeas Menis Mastromichalakis, Zhiwei Xu, Zizhao Chen, Yue Liu, Robert Zhang, Leon Liangyu Chen, Anurag Kashyap, Jan-Lucas Uslu, Jeffrey Li, Jianbo Wu, Minghao Yan, Song Bian, Vedang Sharma, Ke Sun, Steven Dillmann, Akshay Anand, Andrew Lanpouthakoun, Bardia Koopah, Changran Hu, Etash Guha, Gabriel H. S. Dreiman, Jiacheng Zhu, Karl Krauth, Li Zhong, Niklas Muennighoff, Robert Amanfu, Shangyin Tan, Shreyas Pimpalgaonkar, Tushar Aggarwal, Xiangning Lin, Xin Lan, Xuandong Zhao, Yiqing Liang, Yuanli Wang, Zilong Wang, Changzhi Zhou, David Heineman, Hange Liu, Harsh Trivedi, John Yang, Junhong Lin, Manish Shetty, Michael Yang, Nabil Omi, Negin Raoof, Shanda Li, Terry Yue Zhuo, Wuwei Lin, Yiwei Dai, Yuxin Wang, Wenhao Chai, Shang Zhou, Dariush Wahdany, Ziyu She, Jiaming Hu, Zhikang Dong, Yuxuan Zhu, Sasha Cui, Ahson Saiyed, Arinbjörn Kolbeinsson, Jesse Hu, Christopher Michael Rytting, Ryan Marten, Yixin Wang, Alex Dimakis, Andy Konwinski, and Ludwig Schmidt. Terminal-Bench: Benchmarking Agents on Hard, Realistic Tasks in Command Line Interfaces, January 2026. URL <http://arxiv.org/abs/2601.11868>. arXiv:2601.11868 [cs].
- Todor Mihaylov, Peter Clark, Tushar Khot, and Ashish Sabharwal. Can a Suit of Armor Conduct Electricity? A New Dataset for Open Book Question Answering, September 2018. URL <http://arxiv.org/abs/1809.02789>. arXiv:1809.02789 [cs].
- Malcolm Murray, Steve Barrett, Henry Papadatos, Otter Quarks, Matt Smith, Alejandro Tlaie Boria, Chloé Touzet, and Siméon Campos. A Methodology for Quantitative AI Risk Modeling, December 2025. URL <http://arxiv.org/abs/2512.08844>. arXiv:2512.08844 [cs].
- Vaskar Nath, Pranav Raja, Claire Yoon, and Sean Hendryx. ToolComp: A Multi-Tool Reasoning & Process Supervision Benchmark, 2025. URL <https://arxiv.org/abs/2501.01290>. Version Number: 1.
- Richard Ngo, Lawrence Chan, and Sören Mindermann. The Alignment Problem from a Deep Learning Perspective, May 2025. URL <http://arxiv.org/abs/2209.00626>. arXiv:2209.00626 [cs].
- Caspar Oosterheld, Emery Cooper, Miles Kodama, Linh Chi Nguyen, and Ethan Perez. A dataset of questions on decision-theoretic reasoning in Newcomb-like problems, 2024. URL <https://arxiv.org/abs/2411.10588>. Version Number: 4.
- OpenAI. Learning to Reason with LLMs, September 2024. URL <https://openai.com/index/learning-to-reason-with-llms>.
- Toby Ord. Inference Scaling Reshapes AI Governance, February 2025. URL <http://arxiv.org/abs/2503.05705>. arXiv:2503.05705 [cs].
- Davide Paglieri, Bartłomiej Cupiał, Samuel Coward, Ulyana Piterbarg, Maciej Wolczyk, Akbir Khan, Eduardo Pignatelli, Lukasz Kuciński, Lerrel Pinto, Rob Fergus, Jakob Nicolaus Foerster, Jack Parker-Holder, and Tim Rocktäschel. BALROG: Benchmarking Agentic LLM and VLM Reasoning On Games, April 2025. URL <http://arxiv.org/abs/2411.13543>. arXiv:2411.13543 [cs].
- Tejal Patwardhan, Rachel Dias, Elizabeth Proehl, Grace Kim, Michele Wang, Olivia Watkins, Simón Posada Fishman, Marwan Aljubeh, Phoebe Thacker, Laurance Fauconnet, Natalie S. Kim, Patrick Chao, Samuel Miserendino, Gildas Chabot, David Li, Michael Sharman, Alexandra Barr, Amelia Glaese, and Jerry Tworek. GDPval: Evaluating AI Model Performance on Real-World Economically Valuable Tasks, October 2025. URL <http://arxiv.org/abs/2510.04374>. arXiv:2510.04374 [cs].
- Pierre Peigné, Ky Nguyen, and Paul Wang. Zero knowledge verification for frontier AI training is possible, 2026. URL <https://arxiv.org/abs/2606.05433>. Version Number: 1.
- Lukas Petersson, Axel Backlund, Axel Wennstöm, Hanna Petersson, Callum Sharrock, and Arash Dabiri. Blueprint-Bench: Comparing spatial intelligence of LLMs, agents and image models, 2025. URL <https://arxiv.org/abs/2509.25229>. Version Number: 1.
- Long Phan, Alice Gatti, Ziwen Han, Nathaniel Li, Josephina Hu, Hugh Zhang, Chen Bo Calvin Zhang, Mohamed Shaaban, John Ling, Sean Shi, et al. Humanity’s Last Exam, September 2025. URL <http://arxiv.org/abs/2501.14249>. arXiv:2501.14249 [cs].

- Philip and Hemang. SimpleBench: The Text Benchmark in which Unspecialized Human Performance Exceeds that of Current Frontier Models, 2024. URL <https://simple-bench.com>.
- Govind Pimpale, Axel Højmark, Jérémy Scheurer, and Marius Hobbhahn. Forecasting Frontier Language Model Agent Capabilities, March 2025. URL <http://arxiv.org/abs/2502.15850>. arXiv:2502.15850 [cs].
- Felipe Maia Polo, Seamus Somerstep, Leshem Choshen, Yuekai Sun, and Mikhail Yurochkin. Sloth: scaling laws for LLM skills to predict multi-benchmark performance across families, December 2025. URL <http://arxiv.org/abs/2412.06540>. arXiv:2412.06540 [cs].
- Proximal Labs. FrontierSWE: Benchmarking software engineering skill at the edge of human ability, 2026. URL <https://www.frontierswe.com/>.
- Ben Rank, Hardik Bhatnagar, Ameya Prabhu, Shira Eisenberg, Karina Nguyen, Matthias Bethge, and Maksym Andriushchenko. PostTrainBench: Can LLM Agents Automate LLM Post-Training?, March 2026. URL <http://arxiv.org/abs/2603.08640>. arXiv:2603.08640 [cs].
- Nikil Ravi, Kexing Ying, Vasilii Nesterov, Rayan Krishnan, Elif Uskuplu, Bingyu Xia, Janitha Aswedige, and Langston Nashold. ProofBench Leaderboard and Methodology, 2026. URL https://www.vals.ai/benchmarks/proof_bench. Publication Title: Vals AI.
- David Rein, Betty Li Hou, Asa Cooper Stickland, Jackson Petty, Richard Yuanzhe Pang, Julien Dirani, Julian Michael, and Samuel R. Bowman. GPQA: A Graduate-Level Google-Proof Q&A Benchmark, November 2023. URL <http://arxiv.org/abs/2311.12022>. arXiv:2311.12022 [cs].
- Kylie Robison. Meta got caught gaming AI benchmarks, April 2025. URL <https://www.theverge.com/meta/645012/meta-llama-4-maverick-benchmarks-gaming>.
- Yaniv Romano, Evan Patterson, and Emmanuel Candes. Conformalized Quantile Regression. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d’Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 32, pages 3543–3553. Curran Associates, Inc., 2019. URL https://proceedings.neurips.cc/paper_files/paper/2019/file/5103c3584b063c431bd1268e9b5e76fb-Paper.pdf.
- Yangjun Ruan, Chris J. Maddison, and Tatsunori Hashimoto. Observational Scaling Laws and the Predictability of Language Model Performance, October 2024. URL <http://arxiv.org/abs/2405.10938>. arXiv:2405.10938 [cs].
- Keisuke Sakaguchi, Ronan Le Bras, Chandra Bhagavatula, and Yejin Choi. WinoGrande: An Adversarial Winograd Schema Challenge at Scale. In *The Thirty-Fourth AAAI Conference on Artificial Intelligence, AAAI 2020, The Thirty-Second Innovative Applications of Artificial Intelligence Conference, IAAI 2020, The Tenth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2020, New York, NY, USA, February 7-12, 2020*, pages 8732–8740. AAAI Press, 2020. URL <https://aaai.org/ojs/index.php/AAAI/article/view/6399>.
- Jonas Sandbrink, Hamish Hobbs, Jacob Swett, Allan Dafoe, and Anders Sandberg. Differential technology development: An innovation governance consideration for navigating technology risks, September 2022. URL <https://papers.ssrn.com/abstract=4213670>.
- Scale AI. Introducing VISTA: A Rubric-based Visual Task Assessment, 2025a. URL https://scale.com/leaderboard/visual_language_understanding.
- Scale AI. SEAL LLM Leaderboards: Expert-Driven Evaluations, 2025b. URL <https://scale.com/leaderboard>.
- Scale AI. SWE Atlas, 2026. URL <https://labs.scale.com/leaderboard/sweatlas-qna>. Publication Title: SEAL Leaderboard.
- Aaron Scher and Lisa Thiergart. Mechanisms to Verify International Agreements About AI Development. Technical report, Machine Intelligence Research Institute, November 2024. URL <https://techgov.intelligence.org/research/mechanisms-to-verify-international-agreements-about-ai-development>.
- Jaime Sevilla, Tamay Besiroglu, Ben Cottier, Josh You, Edu Roldan, Pablo Villalobos, and Ege Erdil. Can AI scaling continue through 2030? Technical report, Epoch AI, August 2024. URL <https://epoch.ai/blog/can-ai-scaling-continue-through-2030>.
- Manish Shetty, Naman Jain, Jinjian Liu, Vijay Kethanaboyina, Koushik Sen, and Ion Stoica. GSO: Challenging Software Optimization Tasks for Evaluating SWE-Agents, October 2025. URL <http://arxiv.org/abs/2505.23671>. arXiv:2505.23671 [cs].

- Ved Sirdeshmukh, Kaustubh Deshpande, Johannes Mols, Lifeng Jin, Ed-Yeremai Cardona, Dean Lee, Jeremy Kritz, Willow Primack, Summer Yue, and Chen Xing. MultiChallenge: A Realistic Multi-Turn Conversation Evaluation Benchmark Challenging to Frontier LLMs, March 2025. URL <http://arxiv.org/abs/2501.17399>. arXiv:2501.17399 [cs].
- Rakshith S. Srinivasa, Zora Che, Chen Bo Calvin Zhang, Diego Mares, Ernesto Hernandez, Jayeon Park, Dean Lee, Guillermo Mangialardi, Charmaine Ng, Ed-Yeremai Hernandez Cardona, Anisha Gunjal, Yunzhong He, Bing Liu, and Chen Xing. TutorBench: A Benchmark To Assess Tutoring Capabilities Of Large Language Models, October 2025. URL <http://arxiv.org/abs/2510.02663>. arXiv:2510.02663 [cs].
- Jacob Steinhardt. AI Forecasting: One Year In, July 2022. URL <https://bounded-regret.ghost.io/ai-forecasting-one-year-in/>.
- Chloé Touzet, Henry Papadatos, Malcolm Murray, Otter Quarks, Steve Barrett, Alejandro Tlaie Boria, Elija Perrier, Matthew Smith, and Siméon Campos. The Role of Risk Modeling in Advanced AI Risk Management, December 2025. URL <http://arxiv.org/abs/2512.08723>. arXiv:2512.08723 [cs].
- A. M. Turing. Computing Machinery and Intelligence. *Mind*, LIX(236):433–460, October 1950. ISSN 0026-4423. doi: 10.1093/mind/LIX.236.433. URL <https://doi.org/10.1093/mind/LIX.236.433>.
- UK AI Security Institute. Our evaluation of Claude Mythos Preview’s cyber capabilities, April 2026. URL <https://www.aisi.gov.uk/blog/our-evaluation-of-claude-mythos-previews-cyber-capabilities>.
- Teun van der Weij, Felix Hofstätter, Ollie Jaffe, Samuel F. Brown, and Francis Rhys Ward. AI Sandbagging: Language Models can Strategically Underperform on Evaluations, February 2025. URL <http://arxiv.org/abs/2406.07358>. arXiv:2406.07358 [cs].
- Aki Vehtari, Andrew Gelman, and Jonah Gabry. Practical Bayesian model evaluation using leave-one-out cross-validation and WAIC. *Stat Comput*, 27(5):1413–1432, September 2017. ISSN 1573-1375. doi: 10.1007/s11222-016-9696-4. URL <https://doi.org/10.1007/s11222-016-9696-4>.
- Bertie Vidgen, Austin Mann, Abby Fennelly, John Wright Stanly, Lucas Rothman, Marco Burstein, Julien Benckek, David Ostrofsky, Anirudh Ravichandran, Debnil Sur, Neel Venugopal, Alannah Hsia, Isaac Robinson, Calix Huang, Olivia Varones, Daniyal Khan, Michael Haines, Austin Bridges, Jesse Boyle, Koby Twist, Zach Richards, Chirag Mahapatra, Brendan Foody, and Osvald Nitski. APEX-Agents, February 2026. URL <http://arxiv.org/abs/2601.14242>. arXiv:2601.14242 [cs].
- Clinton J. Wang, Dean Lee, Cristina Menghini, Johannes Mols, Jack Doughty, Adam Khoja, Jayson Lynch, Sean Hendryx, Summer Yue, and Dan Hendrycks. EnigmaEval: A Benchmark of Long Multimodal Reasoning Challenges, February 2025a. URL <http://arxiv.org/abs/2502.08859>. arXiv:2502.08859 [cs].
- Yubo Wang, Xueguang Ma, Ge Zhang, Yuansheng Ni, Abhranil Chandra, Shiguang Guo, Weiming Ren, Aaran Arulraj, Xuan He, Ziyang Jiang, Tianle Li, Max Ku, Kai Wang, Alex Zhuang, Rongqi Fan, Xiang Yue, and Wenhui Chen. MMLU-Pro: A More Robust and Challenging Multi-Task Language Understanding Benchmark. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang, editors, *Advances in Neural Information Processing Systems*, volume 37, pages 95266–95290. Curran Associates, Inc., 2024. doi: 10.52202/079017-3018. URL https://proceedings.neurips.cc/paper_files/paper/2024/file/ad236edc564f3e3156e1b2feafbb99a24-Paper-Datasets_and_Benchmarks_Track.pdf.
- Zhun Wang, Tianneng Shi, Jingxuan He, Matthew Cai, Jialin Zhang, and Dawn Song. CyberGym: Evaluating AI Agents’ Real-World Cybersecurity Capabilities at Scale, 2025b. URL <https://arxiv.org/abs/2506.02548>. Version Number: 3.
- Akash R. Wasil, Peter Barnett, Michael Gerovitch, Roman Hauksson, Tom Reed, and Jack William Miller. Governing dual-use technologies: Case studies of international security agreements and lessons for AI governance, September 2024. URL <http://arxiv.org/abs/2409.02779>. arXiv:2409.02779 [cs] version: 1.
- Jason Wei, Nguyen Karina, Hyung Won Chung, Yunxin Joy Jiao, Spencer Papay, Amelia Glaese, John Schulman, and William Fedus. Measuring short-form factuality in large language models, 2024. URL <https://arxiv.org/abs/2411.04368>. Version Number: 1.
- Kevin L. Wei, Patricia Paskov, Sunishchal Dev, Michael J. Byun, Anka Reuel, Xavier Roberts-Gaal, Rachel Calcott, Evie Coxon, and Chinmay Deshpande. Recommendations and Reporting Checklist for Rigorous & Transparent Human Baselines in Model Evaluations, 2025. URL <https://arxiv.org/abs/2506.13776>. Version Number: 1.
- Colin White, Samuel Dooley, Manley Roberts, Arka Pal, Ben Feuer, Siddhartha Jain, Ravid Shwartz-Ziv, Neel Jain, Khalid Saifullah, Sreemanti Dey, Shubh-Agrawal, Sandeep Singh Sandha, Siddhartha Naidu, Chinmay Hegde, Yann LeCun, Tom Goldstein, Willie Neiswanger, and Micah Goldblum. LiveBench: A Challenging,

- Contamination-Limited LLM Benchmark, April 2025. URL <http://arxiv.org/abs/2406.19314>. arXiv:2406.19314 [cs].
- Tianbao Xie, Danyang Zhang, Jixuan Chen, Xiaochuan Li, Siheng Zhao, Ruisheng Cao, Toh Jing Hua, Zhoujun Cheng, Dongchan Shin, Fangyu Lei, Yitao Liu, Yiheng Xu, Shuyan Zhou, Silvio Savarese, Caiming Xiong, Victor Zhong, and Tao Yu. OSWorld: Benchmarking Multimodal Agents for Open-Ended Tasks in Real Computer Environments. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang, editors, *Advances in Neural Information Processing Systems*, volume 37, pages 52040–52094. Curran Associates, Inc., 2024. doi: 10.52202/079017-1650. URL https://proceedings.neurips.cc/paper_files/paper/2024/file/5d413e48f84dc61244b6be550f1cd8f5-Paper-Datasets_and_Benchmarks_Track.pdf.
- Frank F. Xu, Yufan Song, Boxuan Li, Yuxuan Tang, Kritanjali Jain, Mengxue Bao, Zora Z. Wang, Xuhui Zhou, Zhitong Guo, Murong Cao, Mingyang Yang, Hao Yang Lu, Amaad Martin, Zhe Su, Leander Maben, Raj Mehta, Wayne Chi, Lawrence Jang, Yiqing Xie, Shuyan Zhou, and Graham Neubig. TheAgentCompany: Benchmarking LLM Agents on Consequential Real World Tasks, September 2025. URL <http://arxiv.org/abs/2412.14161>. arXiv:2412.14161 [cs].
- John Yang, Akshara Prabhakar, Karthik Narasimhan, and Shunyu Yao. InterCode: Standardizing and Benchmarking Interactive Coding with Execution Feedback, 2023. URL <https://arxiv.org/abs/2306.14898>. Version Number: 3.
- Mengqi Yuan, Zilong Zhou, Xinzhuang Xiong, Weiming Wu, Jiayang Sun, Jiamin Song, Kaiqian Cui, Bowen Wang, Haoyuan Wu, Yitong Li, Dunjie Lu, Haikong Lu, Qi Zhen, Xinyuan Wang, Jiaqi Deng, Yuhao Yang, Cheng Chen, Boyuan Zheng, Alex Su, Xiao Yu, Hao Zou, Saaket Agashe, Xing Han Lu, Manpreet Kaur, Zhengyang Qi, Vincent Sunn Chen, Frederic Sala, Dayiheng Liu, Junyang Lin, Zhou Yu, Yu Su, Siva Reddy, Xin Eric Wang, Peng Qi, Tianbao Xie, and Tao Yu. OSWorld 2.0: Benchmarking Computer Use Agents on Long-Horizon Real-World Tasks, July 2026. URL <https://arxiv.org/abs/2606.29537>. Version Number: 2.
- Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. HellaSwag: Can a Machine Really Finish Your Sentence? In Anna Korhonen, David Traum, and Lluís Màrquez, editors, *Proc. of ACL*, pages 4791–4800, Florence, Italy, 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1472. URL <https://aclanthology.org/P19-1472>.
- Andy K. Zhang, Neil Perry, Riya Dulepet, Joey Ji, Celeste Menders, Justin W. Lin, Eliot Jones, Gashon Hussein, Samantha Liu, Donovan Jasper, Pura Peetathawatchai, Ari Glenn, Vikram Sivashankar, Daniel Zamoshchin, Leo Glikbarg, Derek Askaryar, Mike Yang, Teddy Zhang, Rishi Alluri, Nathan Tran, Rinnara Sangpisit, Polycarpus Yiorkadjis, Kenny Osele, Gautham Raghupathi, Dan Boneh, Daniel E. Ho, and Percy Liang. Cybench: A Framework for Evaluating Cybersecurity Capabilities and Risks of Language Models, April 2025. URL <http://arxiv.org/abs/2408.08926>. arXiv:2408.08926 [cs].
- Lexin Zhou, Lorenzo Pacchiardi, Fernando Martínez-Plumed, Katherine M. Collins, Yael Moros-Daval, Seraphina Zhang, Qinlin Zhao, Yitian Huang, Luning Sun, Jonathan E. Prunty, Zongqian Li, Pablo Sánchez-García, Kexin Jiang-Chen, Pablo A. M. Casares, Jiyun Zu, John Burden, Behzad Mehrbakhsh, David Stillwell, Manuel Cebrian, Jindong Wang, Peter Henderson, Sherry Tongshuang Wu, Patrick C. Kyllonen, Lucy Cheke, Xing Xie, and José Hernández-Orallo. General scales unlock AI evaluation with explanatory and predictive power. *Nature*, 652(8108):58–67, April 2026. ISSN 0028-0836, 1476-4687. doi: 10.1038/s41586-026-10303-2. URL <https://www.nature.com/articles/s41586-026-10303-2>.
- Minhui Zhu, Minyang Tian, Xiaocheng Yang, Tianci Zhou, Lifan Yuan, Penghao Zhu, Eli Chertkov, Shengyan Liu, Yufeng Du, Ziming Ji, Indranil Das, Qingzhi Chen, Junyi Cao, Jiabin Yu, Peixue Wu, Jinchun He, Yifan Su, Yikun Jiang, Yujie Zhang, Chang Liu, Ze-Min Huang, Weizhen Jia, Yunkai Wang, Farshid Jafarpour, Yong Zhao, Xinan Chen, Jessie Shelton, Aaron W. Young, John Bartolotta, Wenchao Xu, Yue Sun, Anjun Chu, Victor Colussi, Chris Akers, Nathan Brooks, Wenbo Fu, Jinchao Zhao, Marvin Qi, Anqi Mu, Yubo Yang, Allen Zang, Yang Lyu, Peizhi Mai, Christopher Wilson, Xuefei Guo, Juntao Zhou, Daniel Inafuku, Chi Xue, Luyu Gao, Ze Yang, Yair Hein, Yonatan Kahn, Kevin Zhou, Di Luo, John Drew Wilson, Jarrod T. Reilly, Dmytro Bandak, Ofir Press, Liang Yang, Xueying Wang, Hao Tong, Nicolas Chia, Eliu Huerta, and Hao Peng. Probing the Critical Point (CritPt) of AI Reasoning: a Frontier Physics Research Benchmark, 2025. URL <https://arxiv.org/abs/2509.26574>. Version Number: 4.

A Methodological Details

A.1 Growth Curve Specification

Let $y_i(t)$ denote the observed score for benchmark i at time t (days since first observation). We model the latent frontier performance as a shifted sigmoid:

$$\mu_i(t) = \ell_i + (L_i - \ell_i) \cdot \sigma_i(t),$$

where $\ell_i \in [0, 1]$ is the benchmark-specific lower bound (random-chance performance, set per benchmark from its answer format, a published chance baseline or its scoring rule, and set to 0 for free-response, agentic and rubric-graded benchmarks on which guessing scores nothing; see Appendix E.2) and $L_i \in [L_{\min}, 1]$ is the upper asymptote (inferred, with $L_{\min} = 0.75$; see below).

Harvey function. The Harvey curve generalizes the logistic with a shape parameter $\alpha_i > 1$:

$$\sigma_i^{\text{Harvey}}(t) = [1 - (1 - \alpha_i) \exp(-k_i(t - \tau_i))]^{\frac{1}{1-\alpha_i}},$$

where $k_i > 0$ is the growth rate and τ_i is the inflection time. The parameter α_i controls asymmetry, larger values producing more gradual accelerations and faster saturation. When $\alpha_i = 2$, the Harvey function reduces to the standard logistic.

Logistic function. For comparison, we also fit the standard logistic:

$$\sigma_i^{\text{Logistic}}(t) = \frac{1}{1 + \exp(-k_i(t - \tau_i))}.$$

A.2 Observation Model

Observations follow a skew-normal distribution with heteroskedastic noise:

$$y_i(t) \sim \text{SkewNormal}(\mu_i(t), \xi_i(t), s_i),$$

where $s_i \leq 0$ is a skewness parameter allowing scores to fall predominantly below the latent curve.

The noise scale $\xi_i(t)$ is heteroskedastic and Beta-shaped over $[\ell_i, L_i]$:

$$\xi_i(t) = \xi_0 + \xi_i^{\text{base}} \cdot \frac{\sqrt{(\mu_i(t) - \ell_i)(L_i - \mu_i(t))}}{(L_i - \ell_i)/2},$$

with $\xi_0 = 0.01$ fixed. This yields maximal variance at mid-range and minimal variance near the bounds.

A.3 Hierarchical Structure

The joint model places shared hyperpriors across benchmarks:

Upper asymptote. $L_i = L_{\min} + (1 - L_{\min}) \cdot L_i^{\text{raw}}$, with $L_{\min} = 0.75$ and $L_i^{\text{raw}} \sim \text{Beta}(\mu_L, \sigma_L)$, and hyperpriors $\mu_L \sim \text{Beta}\left(\text{mean} = \frac{0.96 - L_{\min}}{1 - L_{\min}}, \text{sd} = \frac{0.02}{1 - L_{\min}}\right)$ and $\sigma_L \sim \text{Half-}\mathcal{N}\left(\text{sd} = \frac{0.02}{1 - L_{\min}}\right)$, truncated at $\sigma_L \leq (1 - \mu_L)\sqrt{\mu_L/(2 - \mu_L)}$ so that the second shape parameter of the Beta stays at or above 1. Below that value the density of L_i diverges at 1, which would put a spike of prior and posterior mass on perfect scores. On the scale of L_i , the hyperprior on the population mean $L_{\min} + (1 - L_{\min})\mu_L$ is thus centered on 0.96 with standard deviation 0.02. Two constraints come from the data. First, a frontier cannot plateau below what has already been reached, so the Beta of each benchmark is cut off below its best observed performance, human baseline or model score (an interval transform on the draw, so that μ_L and σ_L keep describing the asymptotes themselves). Second, L_i is pinned at 1 for the 13 benchmarks whose tasks are all known to be solvable (ARC-AGI, ARC-AGI-2, EBR-bench, VPCT, Cybench, the two FrontierMath v2 sets and the six UK AI Security Institute capture-the-flag suites and cyber ranges), and the floor pins it at 1 for the five on which a score of 100% has already been recorded.

Growth rate. $k_i \sim \mathcal{G}(k_\mu, k_\sigma)$, with $k_\mu \sim \mathcal{G}(\text{mean} = 0.005, \text{sd} = 0.002)$ and $k_\sigma \sim \text{Half-}\mathcal{N}(\text{sd} = 0.005)$.

Inflection time. $\tau_i \sim \text{Gumbel}(\hat{\tau}_i, \beta)$, where $\hat{\tau}_i$ is the empirical midpoint of benchmark i 's observed time range and $\beta = 730$ days (2 years). The right-skewed Gumbel prior reflects that for unsaturated benchmarks, the inflection point likely lies beyond observed data.

Noise. $\xi_i^{\text{base}} \sim \mathcal{G}(\xi_\mu^{\text{base}}, \xi_\sigma^{\text{base}})$, with hyperpriors $\xi_\mu^{\text{base}} \sim \mathcal{G}(\text{mean} = 0.05 + \frac{N}{50}, \text{sd} = 0.02)$ and $\xi_\sigma^{\text{base}} \sim \text{Half-}\mathcal{N}(\text{sd} = 0.05)$, where N corresponds to the top- N frontier of scores considered ($N = 3$ in this paper).

Skewness. $s_i \sim \text{Truncated-}\mathcal{N}(s_\mu, s_\sigma, -\infty, 0)$, with hyperpriors $s_\mu \sim \mathcal{N}(\text{mean} = -2 - \frac{N}{2}, \text{sd} = 0.5)$ and $s_\sigma \sim \text{Half-}\mathcal{N}(\text{sd} = 1.0)$.

Harvey shape. $\alpha_i = 1 + \alpha_i^{\text{raw}}$, with $\alpha_i^{\text{raw}} \sim \mathcal{G}(\alpha_\mu^{\text{raw}}, \alpha_\sigma^{\text{raw}})$, ensuring $\alpha_i > 1$, and hyperpriors $\alpha_\mu^{\text{raw}} \sim \mathcal{G}(\text{mean} = 1.5, \text{sd} = 0.5)$ and $\alpha_\sigma^{\text{raw}} \sim \text{Half-}\mathcal{N}(\text{sd} = 0.5)$.

A.4 Inference

Each model family enters a benchmark once per release day, with its best score across sizes and settings, and we track the top-3 frontier scores per benchmark at each point in time to reduce noise from suboptimal evaluations. Models are written in PyMC (Abril-Pla et al., 2023) and sampled with the No-U-Turn Sampler as compiled by nutpie (4 chains of 2000 posterior samples after 1000 warmup iterations at target acceptance 0.9; one draw in four is kept, so 2000 posterior draws per fit). In the independent variants, each benchmark's hyperparameters have a single member and stay at their prior, so we integrate them out by quadrature rather than sample them, and use a target acceptance of 0.95. Temporal-holdout fits (Appendix C) include fewer benchmarks, which leaves the hyperpriors less constrained, and use a target acceptance of 0.99, 2000 warmup iterations and 5000 posterior samples per chain for every variant, thinned in the same way to 5000 posterior draws per fit. Convergence is assessed via $\hat{R}$ diagnostics and effective sample size. The main fit has $\hat{R} \leq 1.01$ for every parameter and 15 divergent transitions out of 8000 sampled draws, and the other full-data variants $\hat{R} \leq 1.03$ with under 2% of divergent transitions. On a laptop CPU (Apple M4, 16 GB of memory), the 16 fits of the main analysis (8 variants on the full data and on the 2025 holdout) take about one hour, and the additional retrodiction and prior-sensitivity fits about 40 more minutes.

A.5 What the Hierarchy Does

Fitting each benchmark separately means a benchmark with five data points is described only by those five points, and a sigmoid through five points extends almost anywhere. The joint model instead estimates, alongside the individual curves, the distribution of growth rates, asymptotes, shapes and noise levels across the 98 benchmarks, and pulls each benchmark's parameters toward it in proportion to how little its own data constrain them. Instead of manually defining a prior for each of the model parameters, for example a Beta prior with fixed parameters for the upper asymptote, the Beta hyperparameters themselves have a prior and the Beta distribution of upper asymptotes is inferred from the data.

This is not an assumption that benchmarks behave alike. The population distribution has an estimated spread, and all the parameters are still estimated for each benchmark. Nevertheless, pooling propagates error as well as information, which is why we report the independent fits throughout, and check in Supp. Table 4 that removing the hierarchy moves saturation dates later by only 2.4 months on average (median 0.7 months).

B Sensitivity Analysis

We assess the robustness of our main finding to all modeling choices by evaluating a full grid of 8 model variants: sigmoid family (Harvey vs. logistic) $\times$ hierarchical structure (joint vs. independent) $\times$ likelihood (skew-normal vs. normal). Independent fits use identical model structure but estimate all parameters separately for each benchmark without shared hyperpriors. Each variant is evaluated on model comparison via LOO-ELPD and saturation projections.

B.1 Model Comparison (LOO-ELPD)

We compare all 8 variants using leave-one-out cross-validation (LOO; Vehtari et al., 2017). LOO-ELPD estimates each model's predictive accuracy by measuring how well it predicts each observation when that observation is held out, implicitly penalizing model complexity without requiring explicit parameter counting.

Supp. Table 2 reports the expected log pointwise predictive density (ELPD; higher is better), the difference relative to the best model (ΔELPD ; negative means worse), and the Bayesian stacking weight (the optimal weight for combining models into a predictive ensemble). Each of the three choices improves fit in every pairing with the other two: the Harvey curve over the logistic, the skew-normal over the normal likelihood, and the joint over the independent structure. The best logistic variant trails the main model by 94.8 ± 12.5 , more than seven standard errors, and stacking assigns essentially all of its weight to the main model. Pareto-smoothed importance sampling flags between 39 and 70 of the 1,621 observations per variant as influential ($\hat{k} > 0.7$), so the ELPD values are approximate, but the gaps between variants are several times their standard errors.

Table 2: LOO-ELPD model comparison across all 8 variants (Vehtari et al., 2017). Higher ELPD indicates better predictive fit. ΔELPD is the difference relative to the best model; ΔSE is its standard error. Weight is the Bayesian stacking weight.

Model variant	ELPD	ΔELPD	ΔSE	Weight
Harvey joint (skew)	2249.4	0	—	1.00
Harvey indep. (skew)	2190.7	−58.6	8.0	0
Harvey joint (normal)	2165.3	−84.1	12.8	0
Logistic joint (skew)	2154.5	−94.8	12.5	≈ 0
Logistic indep. (skew)	2126.9	−122.5	14.1	≈ 0
Harvey indep. (normal)	2122.5	−126.9	12.4	≈ 0
Logistic joint (normal)	2096.1	−153.3	15.5	≈ 0
Logistic indep. (normal)	2075.9	−173.5	14.9	≈ 0

B.2 Sensitivity to Saturation Threshold

Supp. Table 3 reports the proportion of benchmarks projected to reach saturation by 2030 across all 8 model variants and three threshold definitions (90%, 95%, 99% of score range, from random chance to their estimated upper asymptote L_i). The qualitative finding is robust to all modeling alternatives ($\geq 91\%$ of benchmarks saturated by 2030 at the 95% threshold). Hierarchical (joint) models produce higher saturation estimates, as expected from information sharing across benchmarks. Saturation estimates are lower with the 99% threshold, although, even under this strict definition, 92% of benchmarks are estimated to be saturated by 2030 with the best model, and $\geq 82\%$ for all model variants.

Table 3: Sensitivity of saturation projections across all 8 model variants and three threshold definitions (90%, 95% and 99% of the score range, from the lower bound ℓ_i to the estimated asymptote L_i).

Model variant	Threshold: 90%		Threshold: 95%		Threshold: 99%	
	Median	80% CI	Median	80% CI	Median	80% CI
Harvey joint (skew)	99.0%	[96.9, 100]	98.0%	[95.9, 99.0]	91.8%	[88.8, 94.9]
Harvey joint (normal)	98.0%	[95.9, 99.0]	95.9%	[93.9, 98.0]	87.8%	[84.7, 90.8]
Harvey indep. (skew)	96.9%	[95.9, 99.0]	94.9%	[92.9, 96.9]	86.7%	[83.7, 89.8]
Harvey indep. (normal)	95.9%	[93.9, 98.0]	92.9%	[90.8, 95.9]	84.7%	[81.6, 87.8]
Logistic joint (skew)	98.0%	[96.9, 99.0]	95.9%	[93.9, 98.0]	85.7%	[83.7, 88.8]
Logistic joint (normal)	98.0%	[95.9, 99.0]	94.9%	[92.9, 96.9]	85.7%	[82.7, 88.8]
Logistic indep. (skew)	96.9%	[94.9, 99.0]	94.9%	[92.9, 96.9]	84.7%	[81.6, 86.7]
Logistic indep. (normal)	94.9%	[92.9, 96.9]	91.8%	[89.8, 94.9]	82.7%	[79.6, 85.7]

B.3 Effect of Modeling Choices on Saturation Dates

We invert each fitted curve analytically to obtain, for every benchmark and posterior draw, the date at which it reaches 95% of its score range, and compare those dates across variants (Supp. Table 4, each choice averaged over the other two). All three effects are small against the four-year horizon of our claim.

B.4 Sensitivity to the Prior on the Upper Asymptote

Because saturation is defined relative to L_i , an informative prior on it could influence the result, and ours is informative, with a floor at $L_{\min} = 0.75$ and a population mean centered on 0.96 with standard deviation

Table 4: **Effect of each modeling choice on projected saturation dates**, in months (positive means later saturation). Each row averages the contrast over the two remaining factors and over all benchmarks, using the posterior median saturation date per benchmark. Per-benchmark dates are reported in Supp. Table 8.

Modeling choice	Mean shift	Median shift	10–90% range
Skew-normal $\rightarrow$ normal likelihood	+2.5 months	+2.3 months	[−0.1, +8.3]
Joint $\rightarrow$ independent	+2.4 months	+0.7 months	[−0.7, +4.8]
Harvey $\rightarrow$ logistic	+2.5 months	+1.0 month	[−0.5, +5.6]

0.02. Supp. Table 5 refits with the floor at 0.50, with the standard deviation widened to 0.05, and with the floor at 0.50 and the standard deviation widened further to 0.10.

None of the three changes moves the headline proportion, which stays at 98.0% (80% CI: [95.9, 99.0]). Lowering the floor changes little, since no benchmark’s data supports an asymptote near 0.50, and the asymptotes are in any case held above the best performance already observed (Appendix A). Widening the prior lets the asymptote estimates spread further down, from a 10th percentile of 0.927 to 0.909 with the lower floor and the widest prior, and a lower asymptote leaves a shorter range to cover before reaching 95% of it, which makes saturation easier rather than harder. Our prior is therefore not what drives the conclusion.

Table 5: **Sensitivity to the prior on the upper asymptote.** $L_{\min}$ is the hard floor of the asymptote and sd, on the scale of the asymptote, is both the standard deviation of the hyperprior on its population mean and the scale of the half-normal prior on its spread. Relaxing the prior leaves the projected proportion saturated by 2030 unchanged. The last column reports the minimum effective sample size and the number of divergent transitions; the variant that samples least well is Low floor ($L_{\min}=0.50$).

Prior on L	Sat. by 2030	80% CI	Median L	L 10–90%	ESS / div.
Main ($L_{\min}=0.75$, sd 0.02)	98.0%	[95.9, 99.0]	0.947	[0.927, 1.000]	732 / 15
Low floor ($L_{\min}=0.50$)	98.0%	[95.9, 99.0]	0.950	[0.923, 1.000]	114 / 68
Weak prior (sd 0.05)	98.0%	[95.9, 99.0]	0.942	[0.918, 1.000]	725 / 12
Low floor + weaker prior (sd 0.10)	98.0%	[95.9, 99.0]	0.941	[0.909, 1.000]	598 / 23

C Retrodiction Analysis

We validate our forecasting methodology using temporal holdout, training on data before a cutoff date and evaluating predictions on subsequently observed scores.

C.1 Protocol

We set the cutoff date to January 1, 2025. Models are trained on all benchmark data prior to this date, then asked to predict scores observed on models released between January 1, 2025 and October 1, 2026. Benchmarks with fewer than five pre-cutoff frontier observations are excluded, since a sigmoid can hardly be identified from fewer points, which leaves 49 of the 98 benchmarks and 417 held-out observations. We compare all model variants. Appendix C.4 repeats the exercise at earlier cutoffs to probe longer horizons.

C.2 Evaluation Metrics

Bayesian Predictive Calibration. We assess whether predicted credible intervals achieve their nominal coverage. For each confidence level $p \in [0.01, 0.99]$, we compute the fraction of test observations falling within the p -credible interval of the posterior predictive distribution. A well-calibrated model shows observed coverage matching expected coverage.

CRPS. The Continuous Ranked Probability Score measures the quality of probabilistic forecasts, penalizing both miscalibration and lack of sharpness. It generalizes the Brier score to continuous predictions. Lower CRPS indicates better predictions.

RMSE. Root Mean Squared Error between the posterior mean prediction and observed scores.

Table 6: **Retrodiction accuracy as a function of forecast horizon** for the main model (Harvey joint, skew-normal). Each row trains on frontier scores released before the cutoff and predicts every score observed between the cutoff and October 2026. The retrospective filter keeps only benchmarks with at least 5 pre-cutoff frontier observations, which is why the earlier cutoffs cover far fewer benchmarks: at the 2023 cutoff only the commonsense and early question-answering sets and GSM8K existed. Nominal coverage is 80%; the last two columns count the held-out observations falling above the upper bound of the 80% credible interval and those falling below its lower bound, so a large asymmetry over many observations means the model erred in one direction.

Train cutoff	Horizon	Benchmarks	n_{train}	n_{test}	CRPS	RMSE	80% cov.	Above	Below
2023-01	3.7 yr	8	57	88	0.043	0.070	70.5%	2	24
2024-01	2.7 yr	11	114	131	0.091	0.187	61.1%	49	2
2025-01	1.7 yr	49	561	417	0.056	0.109	73.9%	106	3

C.3 Retrodiction Results

Supp. Figure 5 showcases model calibration. Full retrodiction metrics (CRPS, RMSE) for all 8 model variants are reported in Supp. Table 7.

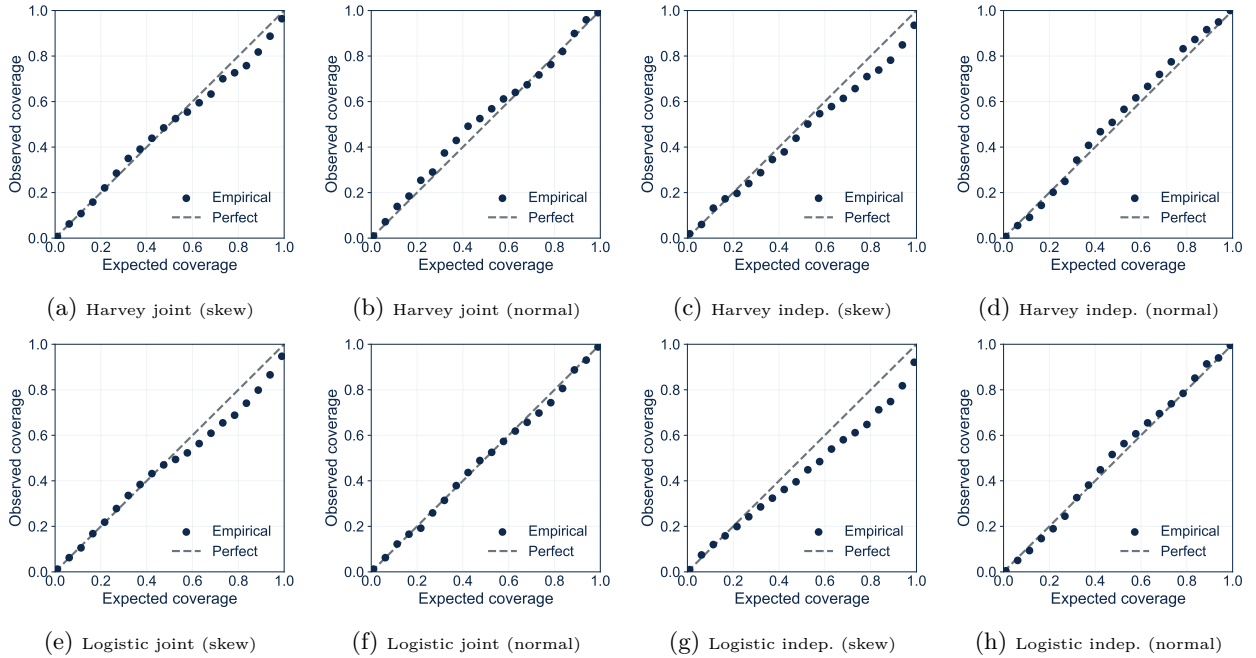


Figure 5: Calibration curves for all 8 model variants. Well-calibrated models produce points close to the diagonal. Normal-likelihood variants come closest to nominal coverage on this holdout; skew-normal variants have intervals that are somewhat too narrow.

All eight model variants achieve strong out-of-sample predictive performance ($\text{CRPS} \leq 0.062$), with differences between variants that are small against the score scale (Supp. Table 7). The joint model and the Harvey curve improve CRPS in every pairing with the other choices. The skew-normal likelihood predicts nearly as well as the normal one (CRPS 0.056 against 0.055 for the joint Harvey variants), and the normal one is closer to nominal coverage (78.2% against 73.9% for the nominal 80% interval, Supp. Figure 5). For the main model, 25.4% of the held-out observations fall above the 80% interval and 0.7% below it, so the misses are one-sided and the model underpredicted the pace of progress over 2025–2026.

We select the Harvey hierarchical model with skew-normal likelihood for our main analysis. The hierarchical structure enables information sharing across benchmarks without degrading performance, which may particularly benefit predictions for data-sparse benchmarks. Although the Harvey model is more complex than the logistic, Bayesian inference naturally regularizes through prior specifications, avoiding the overfitting concerns

that arise with complex models in classical machine learning. We therefore choose the model that aligns with our theoretical understanding of capability progress and that is confirmed as optimal by formal model comparison (Supp. Table 2). The main model predicts the holdout nearly as well as the normal-likelihood variant, which leads to the same conclusion (95.9% of benchmarks saturated by 2030, Supp. Table 3) and whose saturation dates are later than those of the main model by 4.2 months on average (2.5 months for the skew-normal to normal contrast averaged over the other modeling choices, Supp. Table 4).

C.4 Forecast Horizon

The holdout above spans 21 months, whereas our claim concerns 2030. We therefore push the training cutoff back to January 2024 and 2023, giving horizons up to 3.7 years (Supp. Table 6). This exercise necessarily reduces the number of benchmarks covered, since the retrospective filter keeps only benchmarks with at least five pre-cutoff observations, so 8 survive at the 2023 cutoff (commonsense and early question-answering sets, plus GSM8K) and 11 at 2024; at the 2022 cutoff only three would, too few to report. All holdout fits converge: $\hat{R}$ is at most 1.01 for the main model at every cutoff and 1.02 across the eight variants, with under 1% of divergent transitions.

Coverage of the nominal 80% interval is 74% at the 2025 cutoff, 61% at 2024 and 70% at 2023; with so few data the coverage estimates at the earlier cutoffs are themselves imprecise. The last two columns of Supp. Table 6 show the direction of the misses. At the 2025 and 2024 cutoffs nearly all fall above the upper bound (106 observations above against 3 below, and 49 against 2), so the model projected saturation too late. The 2023 cutoff errs the other way on 24 of its 88 observations (2 above), on eight early benchmarks whose final points of progress came more slowly than projected. Our intervals are therefore too narrow at multi-year horizons, and on the benchmarks that weigh most in our set they have erred by projecting saturation too late.

C.5 Validation: Conformal Prediction Intervals

As a model-free validation of our uncertainty quantification, we apply Conformalized Quantile Regression (CQR; Romano et al., 2019) to the temporal holdout predictions for all 8 model variants. CQR is a distribution-free method that adjusts Bayesian credible intervals using held-out calibration data. It computes a correction term Q such that the adjusted intervals [lower $- Q$, upper $+ Q$] achieve guaranteed coverage under exchangeability. We assign whole benchmarks at random to the calibration and test halves, repeating over 100 assignments. A small $|Q|$ indicates that the Bayesian intervals are already well-calibrated and require little correction. Supp. Table 7 shows that corrections are small across all variants, at most 0.023 on the 0–1 score scale. They are positive for the skew-normal variants, whose intervals CQR widens, and close to zero for the normal ones, and after adjustment every variant lands between 76% and 82% coverage.

Table 7: **Held-out accuracy and distribution-free calibration.** CRPS and RMSE are out-of-sample scores on the 2025 holdout (lower is better); bold marks the variants a paired comparison cannot separate from the best. Q is the Conformalized Quantile Regression adjustment (Romano et al., 2019) that would be needed for a finite-sample coverage guarantee. Bayesian coverage is the fraction of all held-out observations inside the nominal 80% credible interval, and CQR cov. the coverage of the adjusted intervals. Calibration and test halves are formed by assigning whole benchmarks at random, so the quantity measured is whether intervals calibrated on some benchmarks cover on others; Q and CQR cov. are medians over 100 random assignments.

Model variant	CRPS	RMSE	Q	Bayes. cov.	CQR cov.
Harvey joint (skew)	0.056	0.109	+0.012	73.9%	75.9%
Harvey joint (normal)	0.055	0.106	+0.001	78.2%	76.8%
Harvey indep. (skew)	0.059	0.113	+0.018	72.4%	77.1%
Harvey indep. (normal)	0.058	0.108	−0.008	84.9%	81.9%
Logistic joint (skew)	0.058	0.112	+0.017	71.0%	76.5%
Logistic joint (normal)	0.058	0.110	+0.007	76.0%	78.2%
Logistic indep. (skew)	0.062	0.117	+0.023	67.1%	76.8%
Logistic indep. (normal)	0.059	0.107	+0.001	79.6%	79.0%

D Additional Results

D.1 Additional Categories

Supp. Figure 6 shows trajectories for the four remaining categories. The dual-use chemistry benchmarks saturated first among security-relevant categories, all five by early 2026, with frontier models well above the PhD-level baseline on WMDP Chemistry (81% against 43%) and within six points of it on the two GPQA chemistry sets (Dev et al., 2025). Trivia and commonsense benchmarks saturated earliest overall (TriviaQA in 2022, HellaSwag in 2023, WinoGrande in 2024), consistent with these tasks representing lower cognitive complexity; PIQA is the exception, with a best score of 89% so far and saturation projected in 2027. Language and writing, and multimodal benchmarks show intermediate trajectories, with saturation projected by the end of 2028.

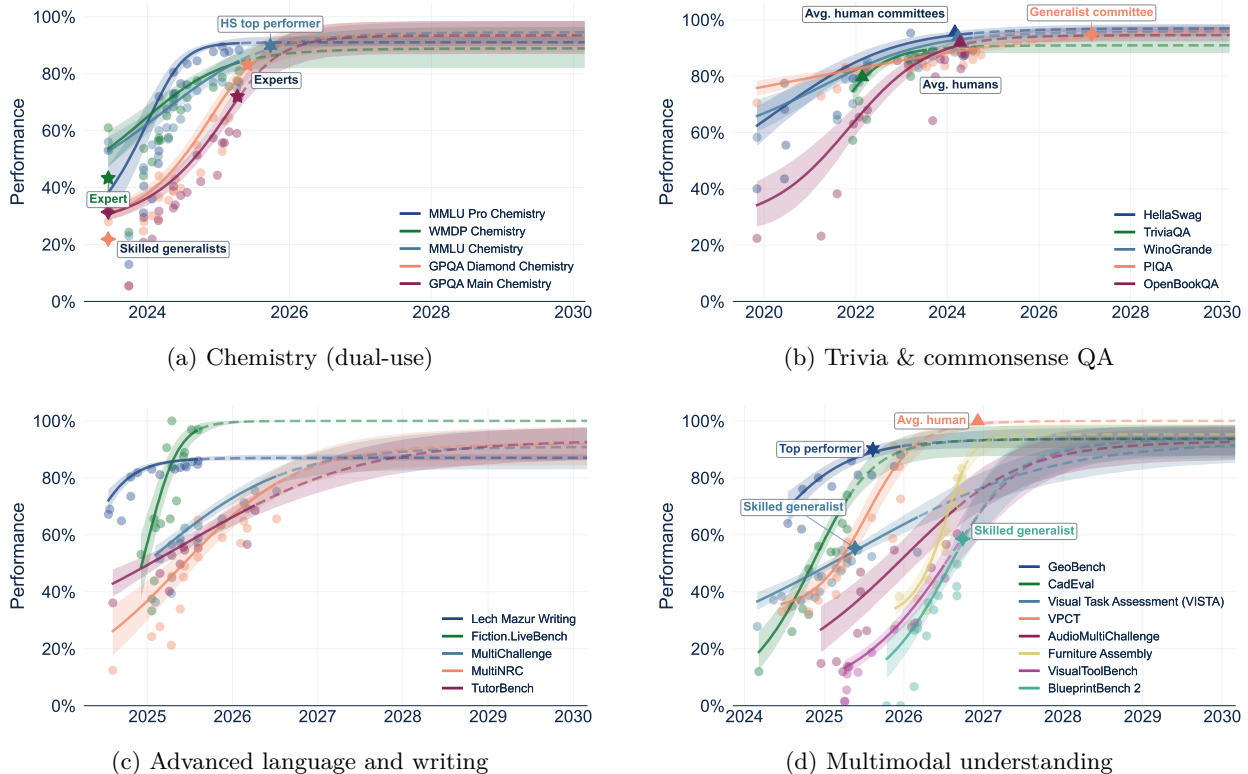


Figure 6: **Additional benchmark trajectories.** Chemistry benchmarks are already saturated; trivia and commonsense benchmarks are at or near saturation; language and multimodal understanding show trajectories consistent with other categories. Graphical conventions are similar to Figure 1.

D.2 Posterior Hyperparameters

Supp. Figure 7 shows the population-level hyperparameters of the main model. The growth rate is centered on $k_\mu = 0.0084$ per day, roughly 4 percentage points per month at the steepest part of a trajectory. The shape parameter confirms the asymmetry that motivates the Harvey curve, with a median of 3.37 (80% CI: [3.01, 3.76]) against the value of 2 at which the curve reduces to a logistic. The asymptote population mean, $L_{\min} + (1 - L_{\min})\mu_L$, is 0.940 (80% CI: [0.929, 0.950]), and the skewness is clearly negative at -2.08 (80% CI: $[-2.44, -1.74]$).

D.3 Upper Asymptote by Benchmark

Supp. Figure 8 shows the benchmark-specific asymptotes compared to the best score observed so far. Since an asymptote cannot fall below the best performance already observed (Appendix A), the lowest estimates sit just above their benchmark’s best score: 0.863 on GPQA Main Biology (best score 0.821) and 0.867 on

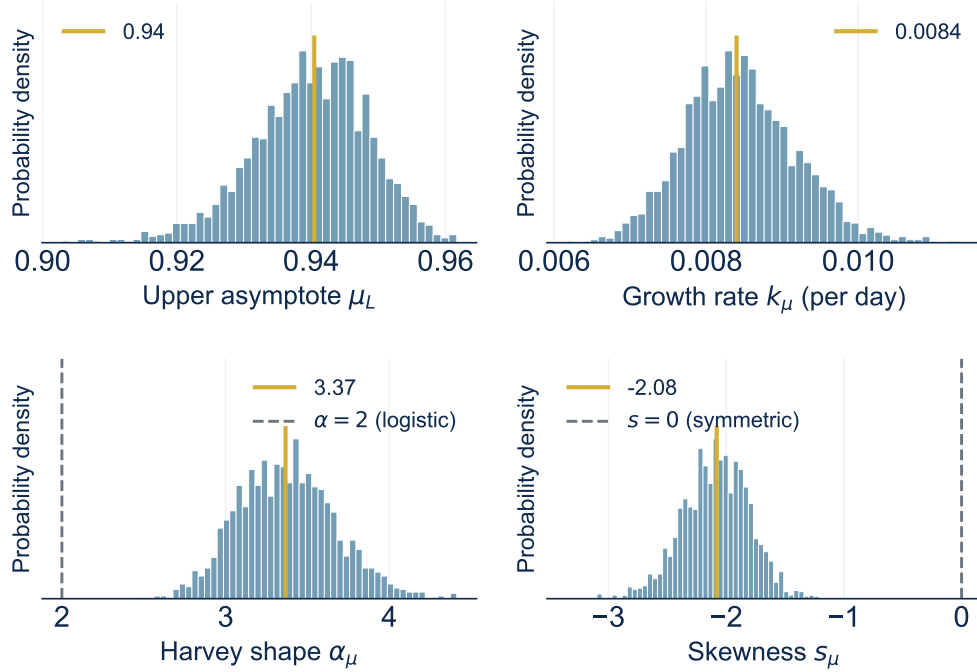


Figure 7: **Hierarchical model hyperparameters.** Posterior distributions for the joint Harvey model hyperparameters, controlling the population-level distribution of upper asymptotes ($L_{\min} + (1 - L_{\min})\mu_L$), growth rates (k_μ), Harvey shapes ($\alpha_\mu = 1 + \alpha_\mu^{\text{raw}}$), and skewness (s_μ) across benchmarks. Solid lines mark the posterior medians; dashed lines mark $\alpha_\mu = 2$, at which the Harvey curve reduces to a logistic, and $s_\mu = 0$.

Lech Mazur Writing (0.860). Eighteen benchmarks have their asymptote at 1, thirteen pinned by a known ceiling and five by a recorded perfect score. Benchmarks with few observations keep intervals close to the spread of the population distribution, which is where the pooling of Appendix A.5 does the most work; the widest intervals are those of MultiChallenge and WMDP Chemistry, whose best scores lie well below the population mean of the asymptotes.

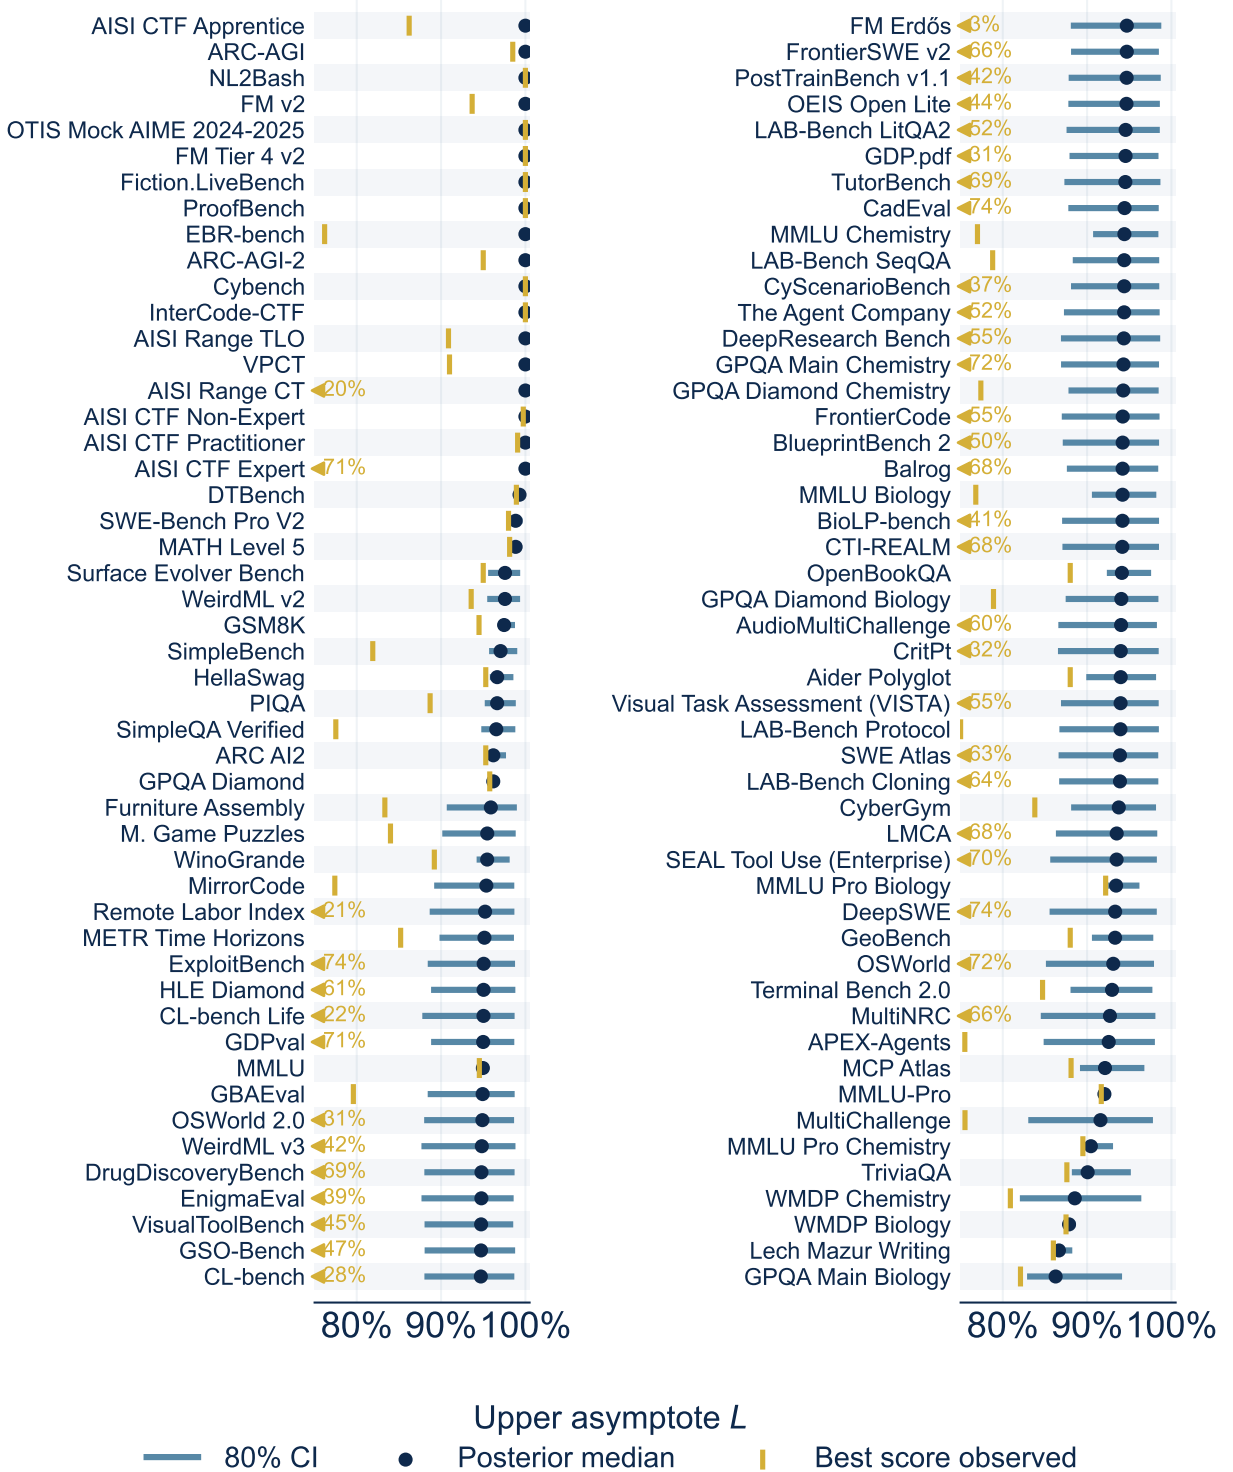


Figure 8: **Upper asymptote estimates by benchmark.** Posterior median and 80% credible interval of the upper asymptote L_i for each benchmark, ordered by median from the top of the left panel to the bottom of the right one, with the best score observed up to October 2026 marked by a vertical tick, or, when it lies below 75%, by an arrow at the left edge with its value. The hierarchical structure allows partial pooling, so benchmarks with little data are shrunk toward the population distribution.

E Benchmark Details

E.1 Included Benchmarks

Supp. Table 8 lists all 98 benchmarks with their category, observation count, lower bound, best score to date, posterior asymptote and projected saturation date. What each measures:

Core AGI progress and general reasoning. ARC-AGI and ARC-AGI-2 test the acquisition of new abstract concepts from few examples (Chollet, 2019; ARC Prize, 2019, 2025); the Remote Labor Index (Mazeika et al., 2025) measures completion of real freelance-platform contracts; APEX-Agents (Vidgen et al., 2026) grades roughly two-hour banking, consulting and law tasks in realistic file environments; GDPval (Patwardhan et al., 2025) has experts compare AI deliverables against professional work on roughly seven-hour tasks across 44 U.S. occupations. In general reasoning, SimpleBench (Philip and Hemang, 2024) targets reasoning humans find easy; Balrog (Paglieri et al., 2025) measures planning in game environments; EnigmaEval (Wang et al., 2025a), long multimodal puzzles; Mystery Game Puzzles (Epoch AI, 2026c), the choice of the best move in positions from an undisclosed puzzle variant of a well-known game; EBR-bench (Epoch AI, 2026a), improvement at an unfamiliar campaign-style game (Earthborne Rangers) over repeated playthroughs with note-taking; CL-bench and CL-bench Life (Dou et al., 2026), learning new knowledge, rules and procedures from task-specific contexts, professional for the former and drawn from everyday life for the latter; DTBench (Oesterheld et al., 2024), decision-theoretic reasoning in Newcomb-like problems; LMCA (Cooper et al., 2026), the rating of informal arguments in conceptual domains such as philosophy and AI safety, scored by correlation with expert ratings.

Domain-specific questions and mathematics. ARC AI2 (Clark et al., 2018) covers student-level science; MMLU (Hendrycks et al., 2020), four-option questions across 57 subjects, and MMLU-Pro (Wang et al., 2024), a harder ten-option extension; GPQA Diamond (Rein et al., 2023), graduate-level science questions written to resist web search; SimpleQA Verified (Wei et al., 2024; Haas et al., 2025), factual recall with verified answers; HLE Diamond, a cleaned and frozen 1,000-question subset of Humanity’s Last Exam (Phan et al., 2025), expert-written questions across disciplines; CritPt (Zhu et al., 2025), unpublished research-level physics challenges; GDP.pdf (Garre et al., 2026), questions grounded in real PDF documents from professional workflows. In mathematics, GSM8K (Cobbe et al., 2021) covers grade-school arithmetic; MATH Level 5 (Hendrycks et al., 2021) and OTIS Mock AIME 2024–2025 (Epoch AI, 2025e) contain competition problems, FrontierMath Tiers 1–3 v2 and Tier 4 v2 (Epoch AI, 2025d) handcrafted ones designed to take expert mathematicians hours, Tier 4 being the hardest; FrontierMath Erdős (Adamczewski and Bloom, 2026) and OEIS Open Lite (Adamczewski, 2026) ask for open problems (Erdős problems and conjectures from the OEIS) to be resolved by a machine-checked Lean proof; ProofBench (Ravi et al., 2026) requires Lean 4 proofs of advanced problems that must compile, with no partial credit.

Autonomous software engineering and agentic computer use. Aider Polyglot (Aider, 2024) covers Exercism coding exercises in six languages; SWE-Bench Pro V2 (Jimenez et al., 2024; Deng et al., 2025) and GSO-Bench (Shetty et al., 2025) measure software engineering on real repositories; DeepSWE (Datacurve, 2026), original tasks across 91 repositories and five languages checked by hand-written behavioral verifiers; FrontierCode (Cognition, 2026), whether open-source maintainers would accept the generated changes; FrontierSWE v2 (Proximal Labs, 2026), 34 tasks at the edge of human ability under a 20-hour budget; SWE Atlas (Scale AI, 2026), codebase question answering, test writing and refactoring; MirrorCode (Adamczewski et al., 2026), the reimplementations of entire programs from their observable behavior, without the source code; GBAEval (Mechanize, 2026), writing a Game Boy Advance emulator from scratch in 24 hours, graded against a reference emulator; Surface Evolver Bench (Henon, 2026), writing physical simulations of liquid surfaces for a specialized solver; METR Time Horizons (Kwa et al., 2025), scored here as the weighted mean success rate on METR’s SWAA, HCAST and RE-Bench tasks, measures autonomy on software and research tasks of increasing length; WeirdML v2 and v3 (Ihle, 2025) and PostTrainBench v1.1 (Rank et al., 2026) measure machine-learning research and post-training skill, v3 being a new agentic task set. Terminal Bench 2.0 (Merrill et al., 2026) and OSWorld (Xie et al., 2024) measure autonomous operation of a shell and a desktop, OSWorld 2.0 (Yuan et al., 2026) long-horizon professional desktop workflows that take skilled users hours; The Agent Company (Xu et al., 2025) simulates a software firm’s internal tasks; MCP Atlas (Bandi et al., 2026) tests tool use through the Model Context Protocol, SEAL Tool Use (Enterprise) (Nath et al., 2025) multi-step reasoning over enterprise tools; DeepResearch Bench (FutureSearch) (FutureSearch et al., 2025) has an agent answer research questions against a frozen snapshot of the web.

Cyber. Cybench (Zhang et al., 2025) and InterCode-CTF (Yang et al., 2023) measure capture-the-flag vulnerability discovery and exploitation, the latter on picoCTF tasks in an interactive environment; the

UK AI Security Institute’s CTF suites grade the same skill at four difficulty levels (Technical Non-Expert, Apprentice, Practitioner, Expert), and its cyber ranges The Last Ones and Cooling Tower test multi-step attacks on a simulated network and on operational technology (UK AI Security Institute, 2026); CyScenarioBench (Irregular, 2026) measures the planning and execution of multi-stage attack scenarios; CyberGym (Wang et al., 2025b), the reproduction of real-world vulnerabilities through proof-of-concept exploits; ExploitBench (Lee and Brumley, 2026), how far an agent progresses from reaching vulnerable code to arbitrary code execution in the V8 JavaScript engine; CTI-REALM (Chakraborty et al., 2026), the generation of detection rules from threat-intelligence reports; NL2Bash (Lin et al., 2018), the translation of natural-language requests into Bash commands.

Biology and chemistry. WMDP Biology and Chemistry (Li et al., 2024a) probe proxy knowledge relevant to weapons of mass destruction; the LAB-Bench subsets (Cloning, LitQA2, Protocol, SeqQA) (Laurent et al., 2024) and BioLP-bench (Dev et al., 2025) measure laboratory skills including protocol comprehension, literature search and sequence analysis; DrugDiscoveryBench (Akyürek et al., 2026) has coding agents solve early-stage drug-discovery tasks, from target identification to structure–activity analysis, each with a single verifiable answer; the biology and chemistry subsets of MMLU (Hendrycks et al., 2020), MMLU Pro (Wang et al., 2024), GPQA Diamond and GPQA Main (Rein et al., 2023) isolate these two disciplines.

Remaining categories. Trivia and commonsense QA covers OpenBookQA (Mihaylov et al., 2018) (elementary science with an open book of facts), HellaSwag (Zellers et al., 2019) (sentence continuation), PIQA (Bisk et al., 2020) (physical commonsense), WinoGrande (Sakaguchi et al., 2020) (Winograd-style pronoun resolution) and TriviaQA (Joshi et al., 2017) (open-ended trivia questions); language and writing, Lech Mazur Writing (Mazur, 2026) (judged short creative fiction), Fiction.LiveBench (Epoch AI, 2025c) (long-context comprehension of stories), TutorBench (Srinivasa et al., 2025) (tutoring), MultiChallenge (Sirdeshmukh et al., 2025) (realistic multi-turn conversations) and MultiNRC (Fabbri et al., 2025) (native multilingual reasoning); multimodal understanding, GeoBench (ccmdi, 2026) (geolocation of images), CadEval (Epoch AI, 2025a) (parametric 3D designs), Visual Task Assessment (VISTA) (Scale AI, 2025a) (rubric-graded visual tasks), VPCT (Brower, 2025) (visual physics comprehension), AudioMultiChallenge (Gosai et al., 2025) (multi-turn spoken dialogue), VisualToolBench (Guo et al., 2025) (tool-enabled image perception and transformation), BlueprintBench 2 (Petersson et al., 2025) (floor plans reconstructed from apartment photographs) and Furniture Assembly (Epoch AI, 2026b) (finding the mistaken step in photographs of furniture builds against the official manual).

Table 8: **Per-benchmark summary.** Lower bound ℓ is random-chance performance where it is well defined (see Appendix E.2); L is the posterior upper asymptote (median and 80% CI); the saturation date is the posterior median of the date at which the trajectory reaches 95% of the score range, with its 80% credible interval. n counts frontier observations used for fitting, and “Best obs.” is the highest score recorded up to October 2026. Rows are grouped by capability category.

Benchmark	n	ℓ	Best obs.	L [80% CI]	Saturation date [80% CI]
<i>Advanced Language and Writing</i>					
Fiction.LiveBench	15	0.000	1.00	1.00 [1.00, 1.00]	2025-06 [2025-05, 2025-08]
Lech Mazur Writing	16	0.000	0.86	0.87 [0.86, 0.88]	2024-11 [2024-10, 2025-01]
MultiChallenge	17	0.000	0.76	0.92 [0.83, 0.98]	2027-02 [2026-07, 2027-10]
MultiNRC	15	0.000	0.66	0.93 [0.85, 0.98]	2027-04 [2026-10, 2027-12]
TutorBench	10	0.000	0.69	0.95 [0.87, 0.99]	2028-02 [2027-05, 2029-04]
<i>Agentic Computer Use</i>					
DeepResearch Bench	12	0.000	0.55	0.94 [0.87, 0.99]	2029-08 [2028-06, 2031-03]
MCP Atlas	20	0.000	0.88	0.92 [0.89, 0.97]	2026-06 [2026-04, 2026-09]
OSWorld	9	0.000	0.72	0.93 [0.85, 0.98]	2026-08 [2026-05, 2027-01]
OSWorld 2.0	7	0.000	0.31	0.95 [0.88, 0.99]	2027-09 [2027-04, 2028-09]
SEAL Tool Use (Enterprise)	12	0.000	0.70	0.94 [0.86, 0.98]	2027-10 [2026-07, 2029-06]
Terminal Bench 2.0	22	0.000	0.85	0.93 [0.88, 0.98]	2026-05 [2026-03, 2026-07]
The Agent Company	12	0.000	0.52	0.94 [0.87, 0.99]	2026-11 [2026-06, 2027-08]
<i>Autonomous SWE</i>					
Aider Polyglot	20	0.000	0.88	0.94 [0.90, 0.98]	2025-07 [2025-05, 2025-09]
DeepSWE	12	0.000	0.74	0.93 [0.86, 0.98]	2026-11 [2026-09, 2027-03]
FrontierCode	13	0.000	0.55	0.94 [0.87, 0.99]	2027-10 [2027-05, 2028-06]
FrontierSWE v2	9	0.000	0.66	0.95 [0.88, 0.99]	2027-05 [2027-01, 2028-06]
GBAEval	10	0.000	0.80	0.95 [0.88, 0.99]	2026-10 [2026-08, 2027-02]

Table 8, continued

Benchmark	n	ℓ	Best obs.	L [80% CI]	Saturation date [80% CI]
GSO-Bench	18	0.000	0.47	0.95 [0.88, 0.99]	2027-04 [2027-01, 2027-10]
METR Time Horizons	31	0.050	0.85	0.95 [0.90, 0.99]	2026-09 [2026-06, 2027-01]
MirrorCode	9	0.000	0.77	0.95 [0.89, 0.99]	2027-02 [2026-11, 2027-08]
PostTrainBench v1.1	9	0.075	0.42	0.95 [0.88, 0.99]	2027-12 [2027-05, 2029-06]
SWE Atlas	15	0.000	0.63	0.94 [0.87, 0.98]	2027-06 [2027-03, 2027-10]
SWE-Bench Pro V2	8	0.000	0.98	0.99 [0.98, 1.00]	2026-08 [2026-06, 2026-09]
Surface Evolver Bench	11	0.000	0.95	0.98 [0.96, 0.99]	2026-11 [2026-07, 2027-07]
WeirdML v2	33	0.000	0.94	0.98 [0.95, 0.99]	2026-07 [2026-05, 2026-10]
WeirdML v3	8	0.000	0.42	0.95 [0.88, 0.99]	2028-01 [2027-06, 2029-06]
<i>Biology</i>					
BioLP-bench	17	0.000	0.41	0.94 [0.87, 0.99]	2026-08 [2026-02, 2027-04]
DrugDiscoveryBench	13	0.000	0.69	0.95 [0.88, 0.99]	2027-06 [2027-02, 2027-10]
GPQA Diamond Biology	11	0.250	0.79	0.94 [0.87, 0.98]	2025-10 [2025-03, 2026-09]
GPQA Main Biology	19	0.250	0.82	0.86 [0.83, 0.94]	2025-06 [2025-02, 2026-02]
LAB-Bench Cloning	14	0.200	0.64	0.94 [0.87, 0.98]	2026-06 [2025-12, 2027-05]
LAB-Bench LitQA2	12	0.200	0.52	0.95 [0.88, 0.99]	2027-12 [2026-11, 2029-12]
LAB-Bench Protocol	13	0.200	0.75	0.94 [0.87, 0.99]	2025-11 [2025-04, 2027-01]
LAB-Bench SeqQA	16	0.200	0.79	0.94 [0.88, 0.99]	2026-03 [2025-10, 2026-10]
MMLU Biology	14	0.250	0.77	0.94 [0.91, 0.98]	2026-06 [2025-09, 2027-07]
MMLU Pro Biology	18	0.100	0.92	0.93 [0.92, 0.96]	2024-04 [2024-01, 2024-09]
WMDP Biology	18	0.250	0.88	0.88 [0.88, 0.89]	2024-01 [2023-11, 2024-03]
<i>Chemistry</i>					
GPQA Diamond Chemistry	20	0.250	0.77	0.94 [0.88, 0.98]	2025-11 [2025-08, 2026-04]
GPQA Main Chemistry	21	0.250	0.72	0.94 [0.87, 0.99]	2026-01 [2025-10, 2026-07]
MMLU Chemistry	18	0.250	0.77	0.94 [0.91, 0.98]	2026-01 [2025-08, 2026-09]
MMLU Pro Chemistry	21	0.100	0.90	0.90 [0.90, 0.93]	2024-08 [2024-06, 2024-10]
WMDP Chemistry	20	0.250	0.81	0.89 [0.82, 0.96]	2025-05 [2024-10, 2026-03]
<i>Core AGI Progress</i>					
APEX-Agents	18	0.000	0.76	0.93 [0.85, 0.98]	2027-03 [2026-12, 2027-06]
ARC-AGI	29	0.000	0.98	1.00 [1.00, 1.00]	2026-01 [2025-12, 2026-02]
ARC-AGI-2	31	0.000	0.95	1.00 [1.00, 1.00]	2026-07 [2026-06, 2026-08]
GDPval	10	0.000	0.71	0.95 [0.89, 0.99]	2026-08 [2026-05, 2026-12]
Remote Labor Index	15	0.000	0.21	0.95 [0.89, 0.99]	2028-02 [2027-09, 2028-10]
<i>Cyber</i>					
AISI CTF Suites - Apprentice	17	0.000	0.86	1.00 [1.00, 1.00]	2026-09 [2026-07, 2026-12]
AISI CTF Suites - Expert	8	0.000	0.71	1.00 [1.00, 1.00]	2027-01 [2026-10, 2027-07]
AISI CTF Suites - Practitioner	8	0.000	0.99	1.00 [1.00, 1.00]	2026-02 [2026-01, 2026-03]
AISI CTF Suites - Technical Non-Expert	13	0.000	1.00	1.00 [1.00, 1.00]	2025-05 [2025-03, 2025-08]
AISI Cyber Ranges - Cooling Tower	6	0.000	0.20	1.00 [1.00, 1.00]	2027-02 [2026-10, 2027-10]
AISI Cyber Ranges - The Last Ones	13	0.000	0.91	1.00 [1.00, 1.00]	2026-08 [2026-07, 2026-10]
CTI-REALM	10	0.000	0.69	0.94 [0.87, 0.99]	2027-05 [2026-11, 2028-03]
CyScenarioBench	9	0.000	0.37	0.94 [0.88, 0.99]	2027-05 [2027-01, 2028-03]
Cybench	17	0.000	1.00	1.00 [1.00, 1.00]	2026-02 [2026-01, 2026-04]
CyberGym	12	0.000	0.84	0.94 [0.88, 0.98]	2026-06 [2026-04, 2026-07]
ExploitBench	8	0.000	0.74	0.95 [0.88, 0.99]	2027-01 [2026-09, 2028-01]
InterCode-CTF	12	0.000	1.00	1.00 [1.00, 1.00]	2025-01 [2024-11, 2025-03]
NL2Bash	13	0.000	1.00	1.00 [1.00, 1.00]	2025-06 [2025-01, 2025-11]
<i>Domain Specific Questions</i>					
ARC AI2	17	0.250	0.95	0.96 [0.95, 0.98]	2023-06 [2023-02, 2023-10]
CritPt	25	0.000	0.32	0.94 [0.87, 0.98]	2028-06 [2027-11, 2029-02]
GDP.pdf	11	0.000	0.31	0.95 [0.88, 0.98]	2028-05 [2027-09, 2029-06]
GPQA Diamond	45	0.250	0.96	0.96 [0.96, 0.97]	2025-10 [2025-09, 2025-12]
HLE Diamond	8	0.048	0.61	0.95 [0.89, 0.99]	2027-04 [2027-01, 2027-12]
MMLU	37	0.250	0.95	0.95 [0.95, 0.96]	2024-03 [2023-11, 2024-06]
MMLU-Pro	28	0.100	0.92	0.92 [0.92, 0.93]	2025-05 [2025-04, 2025-07]
SimpleQA Verified	20	0.000	0.78	0.97 [0.95, 0.99]	2027-06 [2027-02, 2027-11]
<i>General Reasoning</i>					
Balrog	17	0.000	0.68	0.94 [0.88, 0.98]	2028-03 [2027-08, 2029-01]
CL-bench	11	0.000	0.28	0.95 [0.88, 0.99]	2030-01 [2028-07, 2033-04]

Table 8, continued

Benchmark	n	ℓ	Best obs.	L [80% CI]	Saturation date [80% CI]
CL-bench Life	9	0.000	0.22	0.95 [0.88, 0.99]	2028-08 [2027-09, 2030-11]
DTBench	39	0.400	0.99	0.99 [0.99, 1.00]	2026-01 [2025-12, 2026-02]
EBR-bench	16	0.000	0.76	1.00 [1.00, 1.00]	2027-03 [2027-01, 2027-06]
EnigmaEval	21	0.000	0.39	0.95 [0.88, 0.99]	2028-01 [2027-06, 2028-11]
LMCA	34	0.000	0.68	0.94 [0.86, 0.98]	2027-10 [2027-05, 2028-03]
Mystery Game Puzzles	23	0.092	0.84	0.95 [0.90, 0.99]	2027-03 [2027-01, 2027-06]
SimpleBench	23	0.167	0.82	0.97 [0.96, 0.99]	2027-04 [2026-12, 2027-08]
<i>Mathematics</i>					
FrontierMath Erdős	4	0.000	0.03	0.95 [0.88, 0.99]	2029-07 [2027-11, 2032-12]
FrontierMath Tier 4 v2	21	0.000	1.00	1.00 [1.00, 1.00]	2026-08 [2026-07, 2026-09]
FrontierMath Tiers 1-3 v2	26	0.000	0.94	1.00 [1.00, 1.00]	2026-08 [2026-07, 2026-09]
GSM8K	16	0.000	0.94	0.97 [0.97, 0.99]	2023-09 [2023-06, 2023-12]
MATH Level 5	30	0.000	0.98	0.99 [0.98, 1.00]	2024-12 [2024-11, 2025-01]
OEIS Open Lite	5	0.000	0.44	0.95 [0.88, 0.99]	2028-05 [2027-05, 2031-06]
OTIS Mock AIME 2024-2025	45	0.001	1.00	1.00 [1.00, 1.00]	2025-09 [2025-08, 2025-10]
ProofBench	20	0.000	1.00	1.00 [1.00, 1.00]	2026-08 [2026-07, 2026-09]
<i>Multimodal Understanding</i>					
AudioMultiChallenge	12	0.000	0.60	0.94 [0.87, 0.98]	2027-11 [2027-05, 2028-10]
BlueprintBench 2	12	0.000	0.50	0.94 [0.87, 0.99]	2027-09 [2027-05, 2028-05]
CadEval	11	0.000	0.74	0.94 [0.88, 0.98]	2025-11 [2025-08, 2026-03]
Furniture Assembly	15	0.300	0.83	0.96 [0.91, 0.99]	2026-12 [2026-11, 2027-02]
GeoBench	12	0.000	0.88	0.93 [0.91, 0.98]	2025-07 [2025-04, 2026-01]
VPCT	15	0.333	0.91	1.00 [1.00, 1.00]	2026-06 [2026-03, 2026-09]
Visual Task Assessment (VISTA)	19	0.000	0.55	0.94 [0.87, 0.98]	2028-08 [2027-09, 2029-12]
VisualToolBench	12	0.000	0.45	0.95 [0.88, 0.99]	2027-11 [2027-05, 2028-08]
<i>Trivia & Commonsense QA</i>					
HellaSwag	19	0.250	0.95	0.97 [0.96, 0.99]	2023-07 [2023-01, 2024-03]
OpenBookQA	14	0.250	0.88	0.94 [0.92, 0.98]	2024-03 [2023-10, 2024-10]
PIQA	18	0.500	0.89	0.97 [0.95, 0.99]	2027-08 [2026-04, 2029-05]
TriviaQA	11	0.127	0.88	0.90 [0.88, 0.95]	2022-10 [2022-06, 2023-07]
WinoGrande	13	0.500	0.89	0.95 [0.94, 0.98]	2024-05 [2023-09, 2025-04]

E.2 Lower Bounds

Of the 98 benchmarks, 32 have a non-zero bound. For 25 of them it is read off the answer format: 0.50 for binary choice (WinoGrande, PIQA), 0.333 for the three-way VPCT, 0.25 for four-option multiple choice (GPQA Diamond and its biology and chemistry subsets, the biology and chemistry subsets of GPQA Main, MMLU and its biology and chemistry subsets, WMDP Biology and Chemistry, ARC AI2, HellaSwag, OpenBookQA), 0.20 for LAB-Bench (Cloning, LitQA2, Protocol and SeqQA, on average 5-option MCQ), 0.167 for SimpleBench (6-option MCQ), 0.10 for ten-option MMLU-Pro and its biology and chemistry subsets, and 0.001 for OTIS Mock AIME 2024–2025 (000–999 integers). Four take the random-chance baseline published by Epoch AI: 0.40 for DTBench, 0.30 for Furniture Assembly, 0.0922 for Mystery Game Puzzles and 0.048 for HLE Diamond (the chance floor of Humanity’s Last Exam, whose question formats it keeps). Three are set from the scoring rule or an estimate: 0.075 for PostTrainBench, whose score is the absolute benchmark average of the post-trained models, so that an agent that changes nothing keeps the base models’ 7.5%; 0.127 for TriviaQA, the random-entity baseline reported by its authors, and 0.05 for METR Time Horizons, from the share of multiple-choice sub-tasks in its suite.

The remaining 66 are set to zero. For 65 of them this is a documented property of the answer format, since they are free-response, agentic or exact-match benchmarks on which arbitrary output scores nothing (DeepResearch Bench, for instance, scores research answers by precision, recall, F1 or exact correctness, and GeoBench by the share of images whose country is identified, which a random guess among the world’s countries scores at about one over the number of countries), or report a score defined to be zero at chance (a rate of wins plus ties against human experts for GDPval, a correlation with expert ratings for LMCA, a score normalized so that random output scores zero for BlueprintBench 2). The last one, Lech Mazur Writing, grades short fiction with an LLM judge, and no empirical random-chance baseline exists for it, so it is set at zero (we estimate that it is below 10%, which makes it a small approximation).

E.3 Cross-Benchmark Conditional Dependence

The model treats trajectories as conditionally independent given the shared hyperpriors, and several benchmarks share a source dataset or a creator. We pair residuals $y_i(t) - \mathbb{E}[\mu_i(t)]$ by model release and correlate them across benchmarks over the releases they have in common. The correlations are positive throughout: +0.30 on average between unrelated benchmarks, and +0.47 within the twelve lineages built on a common dataset or maintainer (the GPQA Diamond, GPQA Main, MMLU, MMLU Pro, LAB-Bench, ARC-AGI, FrontierMath, WMDP, MultiChallenge and CL-bench families, and the UK AI Security Institute’s capture-the-flag suites and cyber ranges).

The baseline level is mostly a general-capability effect, where strong models sit above trend on everything they are evaluated on. Model identity indeed accounts for 27 to 36% of residual variance (adjusted and raw R^2), so this component adds shared noise around the fitted curves and impacts the intervals.

Our intervals thus treat our 98 benchmarks as carrying a bit more independent information than they do, but reducing the dataset to only one representative per lineage (leaving 78 benchmarks) gives a similar projected saturation proportion, of 97.4% (80% CI: [94.9, 98.7]) against 98.0% ([95.9, 99.0]) on all 98.

F Human Performance Baselines

Supp. Table 9 summarizes human performance baselines used in our analysis. We categorize human performance into four main groups based on expertise level, with committee and high-school variants:

- **Average Human:** Crowdworkers (e.g., MTurk) or non-specialized participants
- **Skilled Generalist:** Individuals with advanced education but not in the target domain (e.g., PhD students in unrelated fields, skilled professionals)
- **Domain Expert:** PhD-level specialists in the relevant domain or expert professionals
- **Top Performer:** Elite performers (e.g., top 5% test takers or best result)

Committee scores represent an aggregation of majority votes or average team scores across human participants. The *High School Qualifier* and *High School Top Performer* categories specifically represent a cohort of students in a specialized training program.

Coverage and quality. Coverage is uneven, good for the dual-use biology and chemistry benchmarks, where RAND elicited expert performance on the same items (Dev et al., 2025), and absent for all cybersecurity and writing benchmarks and for most agentic and software engineering ones. The baselines also differ in kind (time limits, incentives, tool access, etc.) and sample sizes are rarely large. See Wei et al. (2025) for a call for more rigorous and better-documented baselines to support human vs. AI comparison, as well as a practical checklist to structure human metadata.

Interpretation notes. Human baselines vary substantially depending on expertise level and evaluation conditions. For instance, on GPQA Diamond, the gap between skilled generalists (22%) and domain experts (70%) spans nearly 50 percentage points, illustrating how benchmark difficulty depends critically on domain knowledge. Similarly, on mathematical benchmarks, the gap between a CS PhD student (40% on MATH) and an elite mathematician (90%) reflects the specialized nature of competition-level mathematics.

These baselines provide context for interpreting AI progress. When frontier models exceed domain expert performance, as they now do on several benchmarks (e.g., GPQA Diamond, WMDP Biology and WMDP Chemistry), this represents a meaningful capability threshold. However, we caution that benchmark performance may not directly translate to real-world task completion, and that human baselines themselves have limitations (small sample sizes, varying incentive structures, potential ceiling effects).

Table 9: **Human performance baselines by benchmark.** Scores represent accuracy unless otherwise noted. Committee scores use majority votes or average team scores across human participants. Details regarding each human baseline (population, protocol, source) are available with the data in the code repository.

Benchmark	Human Group	Score	Source
<i>Domain Specific Questions</i>			
GPQA Diamond	Domain Expert	69.7%	OpenAI (2024)
GPQA Diamond	Skilled Generalist	21.9%	Rein et al. (2023)
MMLU	High School Top Performer	89.8%	Hendrycks et al. (2020)
MMLU	Average Human	34.5%	Hendrycks et al. (2020)
SimpleQA Verified	Skilled Generalist	94.4%	Wei et al. (2024)
<i>General Reasoning</i>			
EBR-bench	Top Performer	100%	Epoch AI (2024)
EBR-bench	Average Human	52.8%	Epoch AI (2024)
SimpleBench	Top Performer	95.4%	Philip and Hemang (2024)
SimpleBench	Average Human	83.7%	Philip and Hemang (2024)
<i>Mathematics</i>			
FrontierMath Tiers 1–3 v2	Committee of Domain Experts	35%	Epoch AI (2025d)
GSM8K	Skilled Generalist	96.8%	Li et al. (2024b)
MATH Level 5	Domain Expert	90%	Hendrycks et al. (2021)
MATH Level 5	Skilled Generalist	40%	Hendrycks et al. (2021)
OTIS Mock AIME	High School Top Performer	93%	Chen (2025)
OTIS Mock AIME	High School Qualifier	53%	Chen (2025)
<i>Core AGI Progress</i>			
ARC-AGI	Committee of Average Humans	98%	ARC Prize (2019)
ARC-AGI	Skilled Generalist	98%	ARC Prize (2019)
ARC-AGI	Average Human	77%	ARC Prize (2019)
ARC-AGI-2	Committee of Average Humans	100%	ARC Prize (2025)
ARC-AGI-2	Average Human	60%	ARC Prize (2025)
<i>Agentic Computer Use</i>			
OSWorld	Skilled Generalist	72.4%	Xie et al. (2024)
<i>Autonomous SWE</i>			
METR Time Horizons	Committee of Domain Experts	83%	Kwa et al. (2025)
<i>Biology (Dual-Use)</i>			
BioLP-bench	Domain Expert	38.4%	Dev et al. (2025)
GPQA Diamond Biology	Domain Expert	83.1%	Dev et al. (2025)
GPQA Diamond Biology	Skilled Generalist	21.9%	Rein et al. (2023)
GPQA Main Biology	Domain Expert	66.7%	Dev et al. (2025)
GPQA Main Biology	Skilled Generalist	43.2%	Rein et al. (2023)
LAB-Bench Cloning	Domain Expert	60%	Dev et al. (2025)
LAB-Bench LitQA2	Domain Expert	70%	Dev et al. (2025)
LAB-Bench Protocol	Domain Expert	79%	Dev et al. (2025)
LAB-Bench SeqQA	Domain Expert	78%	Dev et al. (2025)
MMLU Biology	High School Top Performer	89.8%	Dev et al. (2025)
WMDP Biology	Domain Expert	60.5%	Dev et al. (2025)
<i>Chemistry (Dual-Use)</i>			
GPQA Diamond Chemistry	Domain Expert	83.1%	Dev et al. (2025)
GPQA Diamond Chemistry	Skilled Generalist	21.9%	Rein et al. (2023)
GPQA Main Chemistry	Domain Expert	72%	Dev et al. (2025)
GPQA Main Chemistry	Skilled Generalist	31.4%	Rein et al. (2023)
MMLU Chemistry	High School Top Performer	89.8%	Dev et al. (2025)
WMDP Chemistry	Domain Expert	43.3%	Dev et al. (2025)
<i>Trivia & Commonsense QA</i>			
HellaSwag	Committee of Average Humans	95.6%	Zellers et al. (2019)
OpenBookQA	Average Human	92%	Mihaylov et al. (2018)
PIQA	Committee of Skilled Generalists	94.9%	Bisk et al. (2020)
TriviaQA	Average Human	79.7%	Joshi et al. (2017)
WinoGrande	Committee of Average Humans	94%	Sakaguchi et al. (2020)
<i>Multimodal Understanding</i>			
BlueprintBench 2	Skilled Generalist	58.6%	Epoch AI (2024)
GeoBench	Top Performer	90%	ccmdi (2026)
VPCT	Average Human	100%	Brower (2025)
VISTA	Skilled Generalist	55.4%	Scale AI (2025a)