



# Generative Information Retrieval

## SIGIR 2024 tutorial – Section 1

---

Yubao Tang<sup>a</sup>, Ruqing Zhang<sup>a</sup>, **Zhaochun Ren<sup>b</sup>**, Jiafeng Guo<sup>a</sup> and **Maarten de Rijke<sup>c</sup>**

<https://generative-ir.github.io/>

July 14, 2024

<sup>a</sup> Institute of Computing Technology, Chinese Academy of Sciences & UCAS

<sup>b</sup> Leiden University

<sup>c</sup> University of Amsterdam


## About presenters



Yubao Tang  
PhD student  
@ICT, CAS



Ruqing Zhang  
Faculty  
@ICT, CAS



Zhaochun Ren  
Faculty  
@LEI



Jiafeng Guo  
Faculty  
@ICT, CAS



Maarten de Rijke  
Faculty  
@UvA

# Information retrieval

Information retrieval (IR) is the activity of obtaining information system resources that are relevant to an information need from a collection of those resources.




**Given:** User query (keywords, question, image, ...)


**Rank:** Information objects (passages, documents, images, products, ...)

**Ordered by:** Relevance scores

# Complex architecture design behind search engines

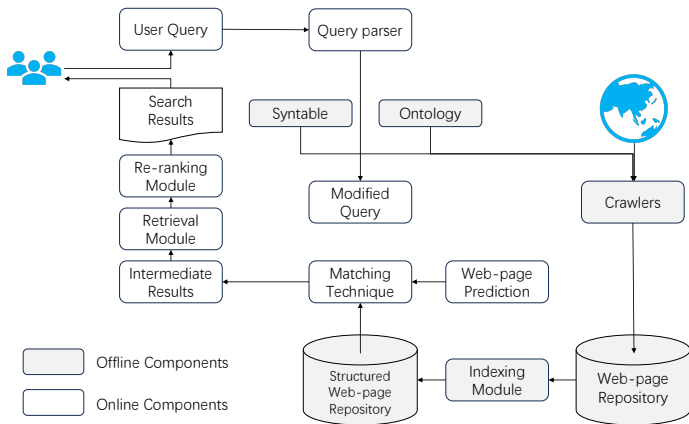


# Complex architecture design behind search engines

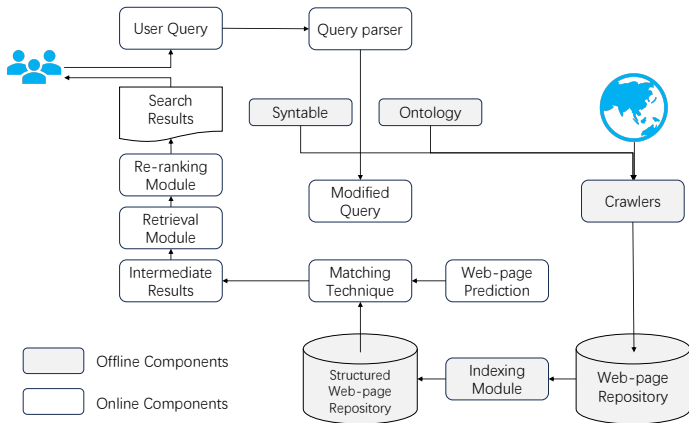

- **Advantages:**


- Pipelined paradigm has withstood the test of time
- Advanced machine learning and deep learning approaches applied to many components of modern systems

# Core pipelined paradigm: Index-Retrieval-Ranking

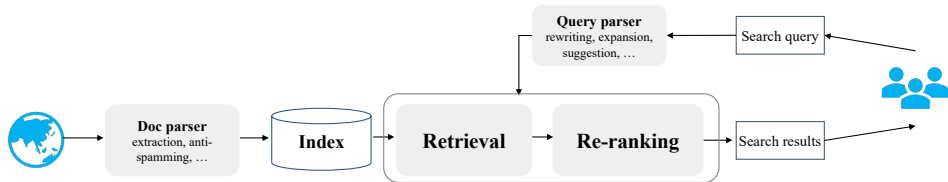


- Index: Build an index for each document in the entire corpus
- Retriever: Find an initial set of candidate documents for a query
- Re-ranker: Determine the relevance degree of each candidate

# Index-Retrieval-Ranking: Disadvantages

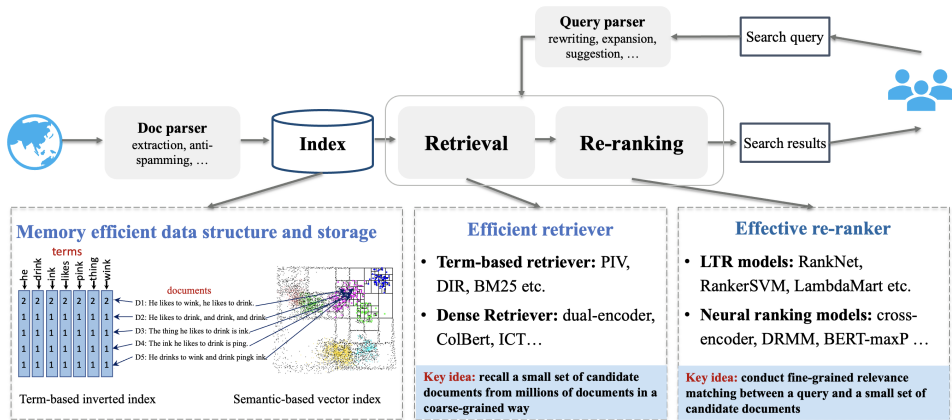


- **Effectiveness**: Heterogeneous ranking components are usually difficult to be optimized in an end-to-end way towards the global objective

# Index-Retrieval-Ranking: Disadvantages

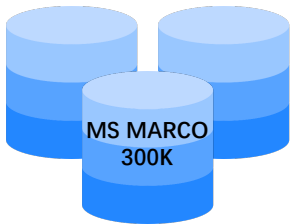

**Big storage**

GTR (Dense retrieval)  
Memory size **1430MB**



**Slow inference speed**


GTR (Dense retrieval)  
Online latency **1.97s**

- **Efficiency:** A large document index is needed to search over the corpus, leading to significant memory consumption and computational overhead




**What if we replaced the pipelined architecture with a single consolidated model that efficiently and effectively encodes all of the information contained in the corpus?**

# Opinion paper: A single model for IR

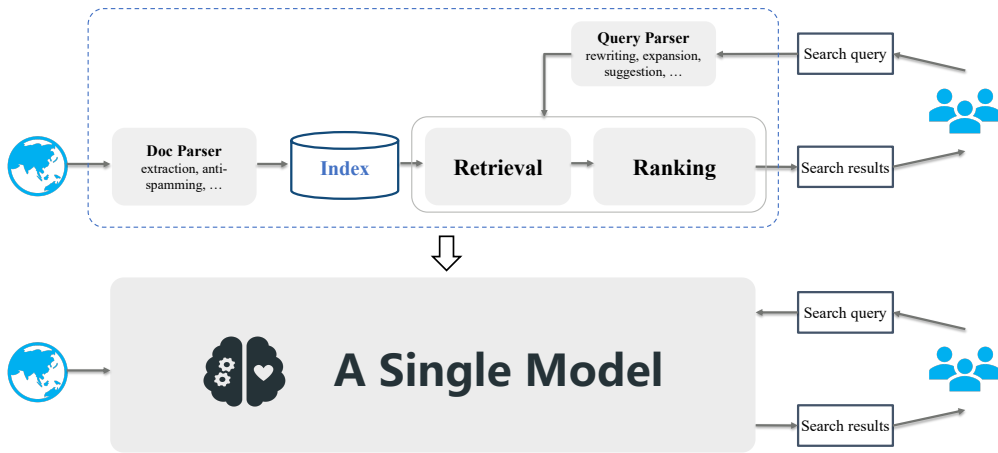

# Generative language models

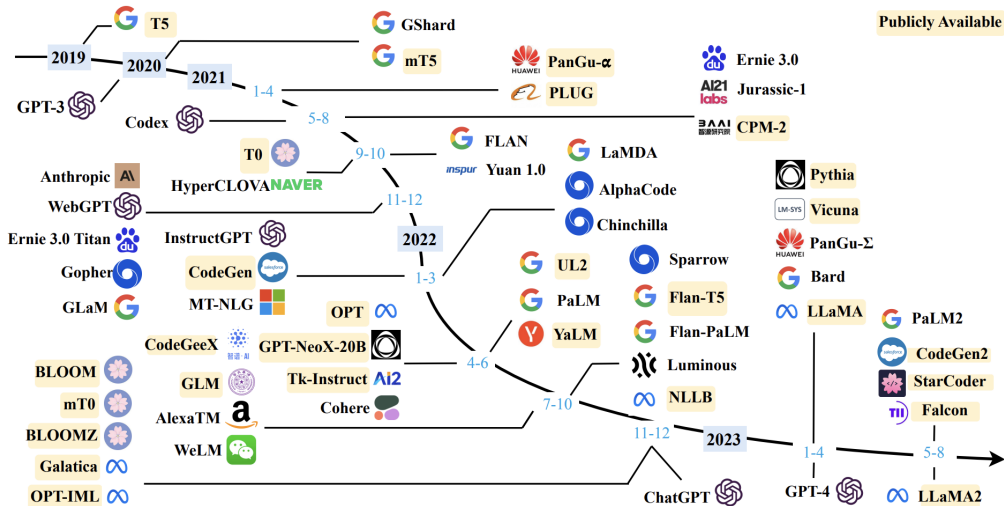

## Two families of generative retrieval

- **Closed-book**: The language model is the **only source** of knowledge leveraged during generation, e.g.,
  - Capturing document ids in the language models
  - Language models as retrieval agents via prompting
- **Open-book**: The language model can draw on **external memory** prior to, during, and after generation, e.g.,
  - Retrieval augmented generation of answers
  - Tool-augmented generation of answers

## Two families of generative retrieval

- **Closed-book**: The language model is the **only source** of knowledge leveraged during generation, e.g.,
  - Capturing document ids in the language models
  - Language models as retrieval agents via prompting
- **Open-book**: The language model can draw on **external memory** prior to, during, and after generation, e.g.,
  - Retrieval augmented generation of answers
  - Tool-augmented generation of answers

## Closed-book generative retrieval


The IR task can be formulated as a **sequence-to-sequence (Seq2Seq)** generation problem

# Closed-book generative retrieval

The IR task can be formulated as a **sequence-to-sequence (Seq2Seq)** generation problem


- **Input:** A sequence of query words
- **Output:** A sequence of document identifiers

# Neural IR models: Discriminative vs. Generative

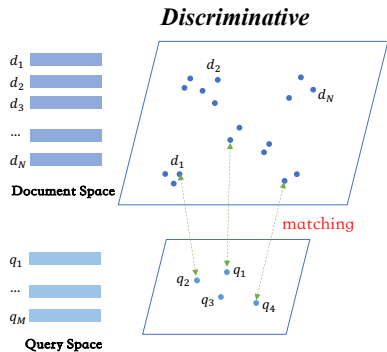

$$p(R = 1|q, d) \approx \dots \approx \operatorname{argmax} s(\vec{q}, \vec{d})$$

( probabilistic ranking principle )

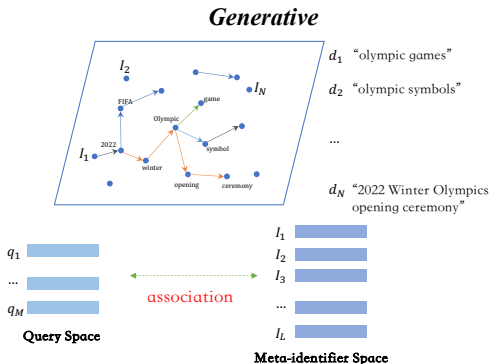


$$p(q|d) \approx p(\text{docID}|q) = \operatorname{argmax} p((l_1, \dots, l_k)|q)$$

( query likelihood )




# Why generative retrieval?

Heterogeneous objectives

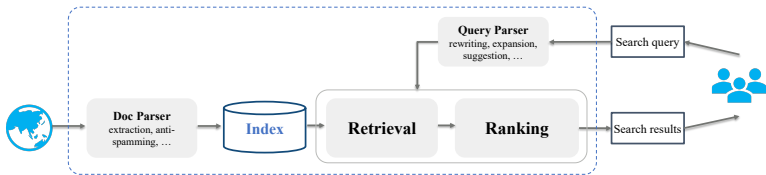





A global objective





- **Effectiveness:** Knowledge of all documents in corpus is encoded into model parameters, which can be optimized directly in an end-to-end manner

# Why generative retrieval?

	Dense retrieval	Generative retrieval
Memory size (MS MARCO 300K)	 GTR 1430MB	 GenRet 860MB
Online latency	 GTR 1.97s	 GenRet 0.16s

- **Efficiency:** Main memory computation of GR is the storage of document identifiers and model parameters
- Heavy retrieval process is replaced with a light generative process over the vocabulary of identifiers

# Statistics of related publications

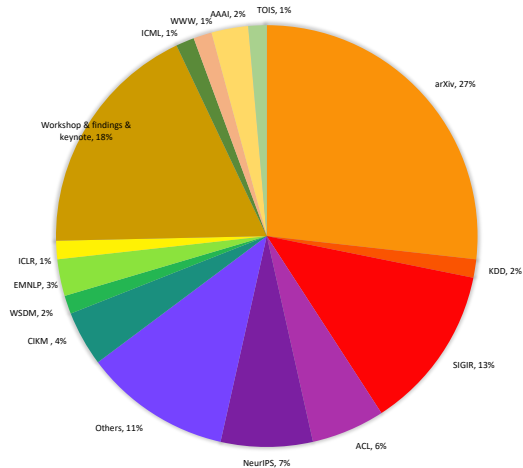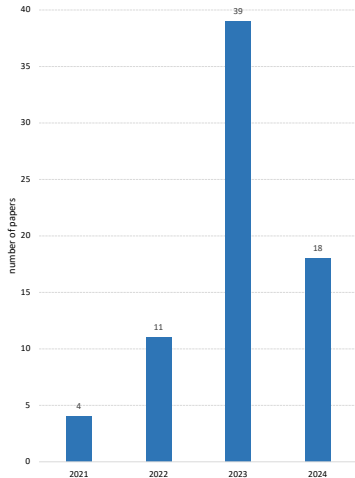

The data statistics cover up to July 10, 2024.

# Goals of the tutorial

- We will cover key developments on generative information retrieval (mostly 2021–2024)
  - **Problem definitions**
  - **Docid design**
  - **Training approaches**
  - **Inference strategies**
  - **Applications**

# Goals of the tutorial

- We will cover key developments on generative information retrieval (mostly 2021–2024)
  - **Problem definitions**
  - **Docid design**
  - **Training approaches**
  - **Inference strategies**
  - **Applications**
- We are still far from understanding how to best develop generative IR architecture compared to traditional pipelined IR architecture:
  - Taxonomies of existing research and key insights
  - Our perspectives on the **current challenges & future directions**

# Schedule

Time	Section	Presenter
13:30-13:50	Section 1: Introduction	Maarten de Rijke
13:50-14:20	Section 2: Definitions & Preliminaries	Zhaochun Ren
14:20-15:00	Section 3: Docid design	Yubao Tang



15min coffee break

15:15-15:55	Section 4: Training approaches	Weiwei Sun
15:55-16:15	Section 5: Inference strategies	Weiwei Sun
16:15-16:35	Section 6: Applications	Yubao Tang
16:35-16:50	Section 7: Challenges & Opportunities	Maarten de Rijke
16:50-17:00	Q & A	All

## References

## References i

- D. Metzler, Y. Tay, D. Bahri, and M. Najork. Rethinking search: Making domain experts out of dilettantes. *SIGIR Forum*, 55(1):1–27, 2021.
- M. Najork. Generative information retrieval (slides), 2023. URL [https://docs.google.com/presentation/d/191AeVzPkh20Ly855tKDkz1uv-1pHV\\_9GxfntiTJPUg/](https://docs.google.com/presentation/d/191AeVzPkh20Ly855tKDkz1uv-1pHV_9GxfntiTJPUg/).
- W. Sun, L. Yan, Z. Chen, S. Wang, H. Zhu, P. Ren, Z. Chen, D. Yin, M. de Rijke, and Z. Ren. Learning to tokenize for generative retrieval. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023.
- W. X. Zhao, K. Zhou, J. Li, T. Tang, X. Wang, Y. Hou, Y. Min, B. Zhang, J. Zhang, Z. Dong, et al. A survey of large language models. *arXiv preprint arXiv:2303.18223*, 2023.