

SGFP4: Adaptive Dual-Mode Macroblock Quantization with GPU-Friendly Unpacking and Verifiable Decode Semantics

Kenneth Hurley
GNUS.AI / Super Genius

Abstract

We present Super Genius FP4 (SGFP4), a GPU-oriented weight-compression container for neural-network inference built from three ingredients: (i) an affine integer reconstruction rule shared by two per-block code modes, a 4-bit signed mode (FP4_AFFINE) and a ternary mode in the ~ 1.58 -bit class (T158_AFFINE); (ii) flag embedding in structurally free low-order bits, which removes separate metadata fetches from the decode path; and (iii) two container profiles that share the same modes and packing rules. The *v1 fixed-payload* profile stores every 64×64 macroblock as a compact header plus a constant 2048-byte payload, giving uniform addressing, trivial prefetching, and stable kernel structure. The *v2 quadtree-adaptive* profile subdivides difficult macroblocks into per-region blocks with their own affine parameters and code modes, trading addressing uniformity for accuracy at a measured density cost. We give a complete normative specification, including byte order and intra-word code ordering, so that independent implementations decode bit-identically; we analyze subdivision under a fixed payload budget and show that explicit per-tile headers make uniform 4-bit subdivision infeasible at every granularity below the macroblock, motivating the variable-size v2 profile; and we describe how the integer-dominant ternary path supplies reference decode semantics for execution attestation in decentralized inference. An exemplary GPU unpack kernel and a full evaluation protocol are provided; empirical results are left to a companion report.

1 Introduction

Modern inference workloads are frequently memory-bandwidth bound: weight tensors are large, reused imperfectly due to cache limits, and accessed with patterns that benefit from regularity and alignment. Low-bit quantization reduces bandwidth but typically introduces either (a) irregular, variable-length layouts that are difficult to decode efficiently on GPUs, or (b) simple fixed layouts that sacrifice accuracy when a single quantization mode is applied uniformly.

SGFP4 targets the intersection of compression, GPU efficiency, and — unusually for a quantization format — *verifiability*. The format was developed for the GNUS.ai distributed inference network [7], where untrusted nodes execute declared models and must be spot-checked cheaply. This deployment adds a requirement that mainstream formats do not address: two honest implementations on different hardware must be able to decode the same container to *bit-identical* weights, so that execution claims can be verified by replay. That requirement shapes several design choices, most importantly the use of affine *integer* codes rather than floating-point codebooks, and a normative specification of byte order and intra-word code ordering.

The contributions of this paper are:

1. A dual-mode affine container in which each macroblock (or sub-block) selects between a 4-bit signed integer mode and a ternary mode under a single reconstruction rule $\hat{w} = S \cdot c + \beta$, with parameters stored as a packed FP16 pair (Section 3).

2. The *v1 fixed-payload* profile: constant 2048-byte payloads per 64×64 macroblock with mode flags embedded in the low bits of 16-byte-aligned offsets, giving uniform addressing and zero-cost metadata (Section 4).
3. A feasibility analysis of subdivision *within* a fixed payload, showing that explicit per-tile headers force mode mixing at every sub-macroblock granularity and identifying an interesting extreme point — all-ternary 4×4 tiles at the same 4.0 bits/weight external density as plain FP4 (Section 5).
4. The *v2 quadtree-adaptive* profile: variable-size macroblock records whose leaves are chosen by an error-driven quadtree with per-level thresholds, per-region mode selection, and optional Laplacian-pyramid error weighting (Section 6).
5. A verifiable-execution codesign: reference integer decode semantics, with the ternary path enabling bit-exact cross-device attestation at the cheapest verification class in the GNUS Execution Integrity System (Section 8).

2 Related Work

Encoders are orthogonal to this work. SGFP4 is a *container and decode* specification. Code assignment inside a block may be produced by round-to-nearest (as in our exemplary encoder), or by error-compensating methods such as GPTQ [4] or activation-aware scaling such as AWQ [9]; any encoder that emits valid codes and parameters produces a conforming container. Outlier-aware schemes [1, 8] similarly motivate our per-region mode selection and the ternary outlier veto in the v2 encoder, but operate at the encoding layer.

Block formats. QLoRA’s NF4 [2] uses a 16-entry non-uniform codebook per small block; decoding is a table lookup. SGFP4 deliberately uses *affine integer* codes instead: reconstruction is a fused multiply-add on a sign-extended nibble, which vectorizes well and, unlike a floating-point codebook, admits integer-exact reference semantics for verification (Section 8). GGUF k-quants in `llama.cpp` [6] are the closest prior container design: 256-weight super-blocks contain sub-blocks with their own (quantized) scales and minima. SGFP4 differs in four ways: (1) the v1 profile keeps a *constant external payload* regardless of the encoder’s internal choices, so addressing is uniform across an entire tensor; (2) the two code modes may be *mixed per block within one tensor*, selected by measured error rather than fixed per file; (3) the v2 profile adapts granularity by an error-driven *quadtree* rather than a fixed sub-block grid; and (4) metadata rides in structurally free low-order bits of aligned offsets or of the packed parameter word, rather than in separate scale streams. OCP Microscaling (MX) formats [12, 11] attach a shared 8-bit exponent to fine-grained groups of 32 elements; SGFP4 instead uses a full FP16 scale *and bias* at coarser granularity, with subdivision available where finer parameters pay for themselves. BitNet b1.58 [10] demonstrates ternary *training*; SGFP4’s `T158_AFFINE` is a post-training *storage and decode* mode that any sufficiently flat block may adopt, with an affine correction per region.

Kernels and extreme compression. Marlin [5] shows that carefully structured 4-bit layouts sustain near-ideal speedups on modern GPUs; SGFP4’s fixed payloads and shift-mask decode are designed to be similarly kernel-friendly, including on mobile-class Vulkan devices. Vector and lattice quantizers such as AQLM [3] and QuIP# [13] reach lower bit-rates at the cost of heavier decode (codebook gathers, Hadamard transforms); SGFP4 occupies the opposite point — decode is a handful of shifts, masks, and one FMA per weight.

Verifiable inference. Zero-knowledge proofs of inference remain orders of magnitude too expensive for interactive serving. The GNUS Execution Integrity System [7] instead verifies *execution honesty* by teacher-forced replay and checkpoint comparison; SGFP4 is, to our knowledge, the first quantization container specified tightly enough (Section 4.3) to serve as the weight substrate for such bit-exact replay across independent implementations.

Novelty and positioning. It is worth being precise about which parts of SGFP4 are new. Per-block affine scale-and-bias quantization (Eq. (2)) is standard practice, shared with GPTQ, AWQ, NF4, and GGUF’s k-quants [4, 9, 2, 6]; a reader familiar with those formats should not expect the numerics alone to be a contribution. Two elements are new in this literature but have direct precedent elsewhere: error-driven *spatial* quadtree subdivision (Section 6) is, to our knowledge, unused in weight quantization, but is exactly the block-partitioning strategy long used in image and video codecs (JPEG2000, HEVC/AV1) to spend bits where a local region is hard to approximate and stay coarse where it is not; we import that mechanism rather than invent it, and Section 9 calls out the open empirical question it raises. The v1 invariant that every macroblock occupies an identical 2048-byte payload *regardless of which mode the encoder chose internally* — letting FP4 and ternary blocks mix freely within one tensor while addressing stays uniform — is, to our knowledge, a modest but genuine container-level contribution: existing formats fix one quantization type per tensor or per file, or vary sub-block size without a constant external stride. The element with no precedent we are aware of in any quantization format, mainstream or otherwise, is the one argued in Section 8: a decode specification closed enough — byte order, intra-word bit order, rounding, and reserved-bit behavior all normative — that independent, mutually untrusting implementations on different hardware must reach a bit-identical tensor, making the container usable as a trust primitive rather than only a compression scheme. That requirement did not originate in the quantization literature; it was imposed by the verification problem of Section 8 and is, in our view, the paper’s central claim.

3 Format Overview

3.1 Notation and tiling

We describe a container representing a weight matrix W of shape $[O, I]$ (output channels by input channels). The tensor is padded, conceptually or physically, with zeros to multiples of 64 in both dimensions. The 64×64 external addressing unit is called a *macroblock* (parts of the reference implementation use the synonym *superblock*). Define

$$T_y = \lceil O/64 \rceil, \quad T_x = \lceil I/64 \rceil, \quad B = T_y \cdot T_x. \quad (1)$$

Macroblock index $b \in [0, B)$ maps to grid coordinates (b_y, b_x) by $b_y = \lfloor b/T_x \rfloor$ and $b_x = b \bmod T_x$, in row-major order.

3.2 Affine reconstruction and the two code modes

Both code modes share one reconstruction rule. For a block with scale S and bias β , weight i is reconstructed from its integer code c_i as

$$\hat{w}_i = S \cdot c_i + \beta, \quad (2)$$

with $c_i \in [-8, 7]$ for FP4_AFFINE (mode 0) and $c_i \in \{-1, 0, +1\}$ for T158_AFFINE (mode 1). S and β are IEEE 754 binary16 (FP16) values, clipped to ± 65504 at encode time, and stored packed in a single `uint32`: S in the upper 16 bits, β in the lower 16 bits (`packHalf2x16` order). Ternary codes plus an

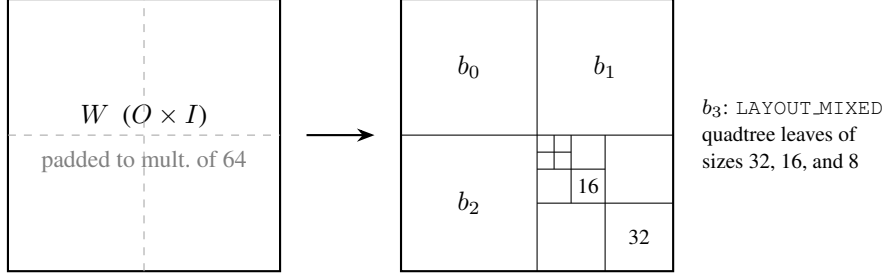


Figure 1: Tiling a weight matrix into 64×64 macroblocks. In the v1 profile every macroblock is one block. In the v2 profile a macroblock may be subdivided by an error-driven quadtree (b_3 shown); each leaf carries its own scale, bias, and code mode.

	v1 fixed-payload	v2 quadtree-adaptive
External unit	64×64 macroblock	64×64 macroblock record
Per-macroblock storage	constant; $4 + 4 + 2048$ B across three arrays	variable-size record (layout-dependent)
Addressing	uniform stride via <code>offsets[]</code>	per-record offset table
Granularity of S, β	per macroblock	per quadtree leaf ($64 \dots 4$)
Mode selection	per macroblock	per quadtree leaf
Flag location	low 4 bits of aligned offsets	low 4 bits of packed parameter word
Best for	throughput, prefetch, verification	accuracy on hard tensors
Status	specified; not yet instantiated	reference-implementation target

Table 1: The two SGFP4 container profiles.

affine correction place mode 1 in the ~ 1.58 -bit class [10] while keeping decode a shift, a mask, and one FMA.

3.3 Two container profiles

SGFP4 defines two profiles that share modes, parameters, and packing rules (Table 1). Profile v1 (Section 4) optimizes for uniform addressing: every macroblock contributes exactly $4 + 4 + 2048$ bytes — one header word, one offset word, and one payload — amortized across the three parallel arrays of Section 4, not as a contiguous per-macroblock record. Profile v2 (Section 6) optimizes accuracy per bit on difficult tensors: macroblock records are variable-size and internally subdivided. Section 5 explains, quantitatively, why subdivision and a fixed payload do not combine under explicit per-tile headers, which is why v2 is variable-size.

4 Profile v1: Fixed-Payload Container

Status. At the time of writing, no artifacts of either profile have been issued; the reference pipeline targets v2. v1 is retained in this specification as the *uniform-stride baseline* — the one configuration whose record size is constant across mode choices, since `T158_AFFINE` payloads pad to the `FP4_AFFINE` size — and as the simplest conformance target for a new decoder implementation.

4.1 Layout

The v1 representation of one tensor is three consecutive arrays:

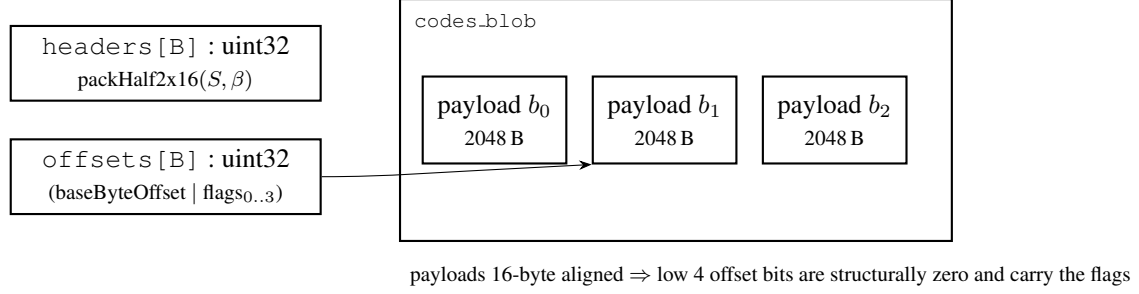


Figure 2: v1 container: two parallel metadata arrays index a blob of constant 2048-byte payloads. Headers supply affine parameters; aligned offsets carry the mode flag at zero metadata cost.

- **headers[B]**: one `uint32` per macroblock, packing (S, β) as described in Section 3.2.
- **offsets[B]**: one `uint32` per macroblock, giving the byte offset of the macroblock payload within the codes blob, with the low 4 bits repurposed as flags (Section 4.2).
- **codes_blob**: concatenated payloads, each exactly 2048 bytes.

Tensor shape (O, I) and array lengths are carried by the enclosing model manifest rather than repeated per tensor; a standalone v1 stream *may* be framed with the same magic and version mechanism as v2 (with version byte `0x01`) when self-description is required. All multi-byte values in SGFP4 are little-endian.

4.2 Flags in aligned offsets

Each payload is 2048 bytes and the blob base is 16-byte aligned, so every stored byte offset is a multiple of 16 and its low 4 bits are structurally zero. v1 repurposes them:

Bit	Mask	Name	Meaning
0	0x1	MODE	0 = FP4_AFFINE, 1 = T158_AFFINE
1	0x2	ERROR_HINT	0 = L_2 -selected, 1 = pyramid-selected (informative)
2–3	0xC	—	reserved, must be written 0

Decoders recover `flags = offsets[b] & 0xF` and `base = offsets[b] & ~0xF`. Only bit 0 is required for decode.

4.3 Payload packing (normative)

Each v1 payload is exactly 2048 bytes, interpreted as 512 little-endian `uint32` words $w_0 \dots w_{511}$. Weights within a macroblock are indexed $i \in [0, 4096)$ in row-major order of the (padded) 64×64 tile.

Mode 0: FP4_AFFINE. Code c_i is stored as a 4-bit two’s-complement nibble (values $0..7 \mapsto 0..7$; $8..15 \mapsto -8..-1$), eight codes per word:

$$\text{nibble}(i) = (w_{\lfloor i/8 \rfloor} \gg 4(i \bmod 8)) \& 0xF. \quad (3)$$

All 512 words are used.

FP4_AFFINE (mode 0): 4096×4 bits

$512 \times \text{uint32}$ (8 nibbles per word) = 2048 B
--

T158_AFFINE (mode 1): 4096×2 bits + reserved

codes: $256 \times \text{uint32} = 1024$ B	reserved: 1024 B (written 0)
--	------------------------------

v2 macroblock record (variable, not to scale):

hdr	split map	N block hdrs	payload ₀	payload ₁	...
-----	-----------	----------------	----------------------	----------------------	-----

split map present only for LAYOUT_MIXED; payloads individually padded to 16-byte multiples

Figure 3: Payload formats. Top two rows: the fixed 2048-byte v1 payloads (to scale). Bottom: the variable-size v2 macroblock record.

Mode 1: T158_AFFINE. Code c_i is stored as a 2-bit symbol, sixteen codes per word:

$$\text{sym}(i) = (w_{\lfloor i/16 \rfloor} \gg 2(i \bmod 16)) \& 0 \times 3, \quad (4)$$

with mapping $00 \rightarrow 0$, $01 \rightarrow +1$, $10 \rightarrow -1$, and 11 reserved (decoded as 0). Words $w_0 \dots w_{255}$ carry the 4096 symbols; words $w_{256} \dots w_{511}$ are reserved and must be written as zero.

These orderings — little-endian words, code i at bit position $4(i \bmod 8)$ or $2(i \bmod 16)$ within its word — are *normative*. Together with Eq. (2) and the FP16 parameter encoding they fully determine the decoded tensor, which is what makes cross-implementation bit-exact replay possible (Section 8).

4.4 Exemplary v1 encoder

The container is encoder-agnostic; the reference encoder is simple by design. For FP4_AFFINE: $\beta = \text{mean}(w)$ and S is chosen from a small logarithmic search (16 candidates over $[0.5, 1.5] \times \max_i |w_i|/7$) minimizing round-trip MSE, with codes $c_i = \text{clip}(\text{round}((w_i - \beta)/S), -8, 7)$. For T158_AFFINE: $\beta = \text{mean}(w)$, $S = \text{mean}_i |w_i - \beta|$, and codes are assigned by thresholding at $\tau = S/2$. The mode is selected per block by

$$\text{choose T158 iff } e_{\text{T158}} \leq (1 + \delta) e_{\text{FP4}}, \quad \delta \in [0.05, 0.20] \text{ (default 0.10)}, \quad (5)$$

where e is L_2 round-trip error or, optionally, a Laplacian-pyramid weighted error that preserves low-frequency structure (recorded in ERROR_HINT). Error-compensating code assignment in the style of GPTQ/AWQ [4, 9] may replace round-to-nearest without any container change.

5 Subdivision Under a Fixed Payload: Feasibility Analysis

A natural extension of v1 is to keep the constant 2048-byte payload but let the encoder subdivide a macroblock internally into uniform tiles, each with its own explicit FP16 (S, β) header (4 bytes) stored inside the payload. Table 2 works out the budget.

Two conclusions follow. First, *with explicit per-tile headers, uniform all-FP4 subdivision is infeasible at every level below L0*: any fixed-payload subdivision scheme must mix modes or share parameters across tiles. Second, L4 is an interesting design point in its own right: 2-bit ternary codes plus 2 bits/weight of amortized affine parameters equal *4.0 bits/weight external density — the same as plain FP4 — but with 4×4 -granular scale and bias*, a very different error profile that should win on outlier-dominated blocks. We retain this analysis as motivation: the production adaptive profile (v2, next) instead relaxes the fixed payload and lets record size follow the layout.

Layout	Tile hdrs (B)	Code bytes left	All-FP4 needs (B)	All-FP4 feasible?
L0: 1×64^2	0 (external)	2048	2048	yes (exactly)
L1: 4×32^2	16	2032	2048	no — ≥ 1 ternary tile
L2: 16×16^2	64	1984	2048	no — ≥ 1 ternary tile
L3: 64×8^2	256	1792	2048	no — ≥ 16 ternary tiles
L4: 256×4^2	1024	1024	2048	no — <i>all-ternary forced</i>

Table 2: Subdivision inside a fixed 2048-byte payload with explicit 4-byte per-tile headers. A ternary n^2 tile saves $n^2/4$ bytes over FP4, which is what funds the header table at each level.

6 Profile v2: Quadtree-Adaptive Container

6.1 File framing

A v2 stream frames its own record structure:

Field	Type	Size	Value / meaning
magic	bytes	4	'SGF4'
version	uint8	1	0x02
B	uint32	4	number of macroblock records
pad0	bytes	7	zero padding to a 16-byte boundary
record_offsets[B]	uint32[]	4B	byte offset of each record, relative to record region
pad1	bytes	0–12	zero padding so the record region begins 16-byte aligned
records	—	var.	B macroblock records, in row-major macroblock order

The padded file header and the padded offset table place the record region at $\text{align}_{16}(16 + 4B)$; each record then begins at a 16-byte-aligned offset within the region and is zero-padded to a 16-byte multiple, so intra-record alignment guarantees hold in *absolute* file addresses for every B , not only $B \equiv 0 \pmod{4}$. (Without `pad1`, records would be misaligned whenever $B \not\equiv 0 \pmod{4}$.)

The stream is self-describing with respect to record structure only. The original tensor dimensions (O, I) — and therefore the macroblock grid (T_y, T_x) of Section 3.1 and the edge-padding crop — are carried by the enclosing model manifest, exactly as for v1 (Section 4): B alone cannot distinguish, for example, a 1×2 from a 2×1 macroblock grid. A fully standalone v2 stream would require (O, I) fields in its header; the shipped profile deliberately keeps tensor geometry in the manifest so that both profiles share a single source of truth for it.

6.2 Macroblock record

A record is:

Field	Size	Meaning
sb_header	4 B	bits 0–2: layout enum (Table 3); bits 3–31 reserved (0)
split_map	12 B	LAYOUT_MIXED only: quadtree structure (below)
block_headers[N]	4N B	per-leaf packed (S, β) with flags in low 4 bits (below)
pad	0–15 B	zero padding to a 16-byte boundary
payloads[N]	var.	per-leaf code payloads, each padded to a 16-byte multiple

Enum	Name	Leaves N	Leaf size
0	LAYOUT_UNIFORM_64	1	64×64
1	LAYOUT_UNIFORM_32	4	32×32
2	LAYOUT_UNIFORM_16	16	16×16
3	LAYOUT_UNIFORM_8	64	8×8
4	LAYOUT_MIXED	var.	mixed (quadtree leaves $64 \dots 4$)
5	LAYOUT_FULL_4x4	256	4×4

Table 3: v2 layout enumeration. Uniform layouts imply N and leaf geometry; LAYOUT_MIXED carries an explicit split map.

Block order and the split map. For uniform layouts, leaves are stored in row-major raster order of the tile grid, and no split map is present. For LAYOUT_MIXED, the quadtree structure is serialized as a *split bitmap*: visiting nodes in pre-order depth-first traversal with quadrant order top-left, top-right, bottom-left, bottom-right, one bit per node of size ≥ 8 records whether that node is split (1) or is a leaf (0). Nodes of size 4 cannot split and contribute no bit. At most $1 + 4 + 16 + 64 = 85$ bits are required; the map is stored in three little-endian `uint32` words (bit k of the map is bit $k \bmod 32$ of word $\lfloor k/32 \rfloor$), upper bits zero. Leaves — and therefore `block.headers` and `payloads` — are stored in the order the traversal encounters them.

Per-leaf headers with embedded flags. Each leaf header packs (S, β) exactly as in v1, then replaces the low 4 bits of the word — which are the 4 least-significant mantissa bits of β — with flags: bit 0 = mode, bit 1 reserved (logarithmic-mode extension), bits 2–3 reserved (0). Note that `ERROR_HINT` is a v1 *offset* flag only (Section 4.2); it has no v2 counterpart, and v2 bit 1 must be written zero until the logarithmic-mode extension is specified. The decoder recovers

$$S = \text{half}(h \gg 16), \quad \beta = \text{half}(h \& 0\text{xFFF0}), \quad \text{flags} = h \& 0\text{xF}. \quad (6)$$

Truncating 4 of the 10 FP16 mantissa bits bounds the relative bias error by $2^{-7} \approx 0.8\%$ of $|\beta|$ for normal values; since β is a per-leaf mean-level correction, this is negligible against 4-bit and ternary code error, and it buys inline flags without any separate metadata stream.

Per-leaf payloads. A leaf of edge size n stores n^2 codes with the same normative packing as Section 4.3 ($n^2/8$ words for mode 0, $n^2/16$ words for mode 1, weight order row-major within the leaf), padded to a 16-byte multiple.

6.3 Exemplary v2 encoder policy

The reference encoder chooses the layout by recursive error testing: a region is accepted if its best single-block encoding meets a per-level threshold on MSE and relative error (defaults tighten with depth, e.g. $\text{MSE} \leq 0.01$ at 64 down to ≤ 0.0005 at 4), and is otherwise split into quadrants, with hysteresis against oscillation, a recursion floor at 4×4 , an optional Laplacian-pyramid error weighting, and an outlier veto that blocks ternary selection for regions whose extremes ternary cannot represent. The resulting leaf set is classified into Table 3; if all leaves share one size and tile the macroblock exactly, the corresponding uniform layout is used, otherwise LAYOUT_MIXED. As with v1, this policy is exemplary; any encoder emitting a well-formed record conforms.

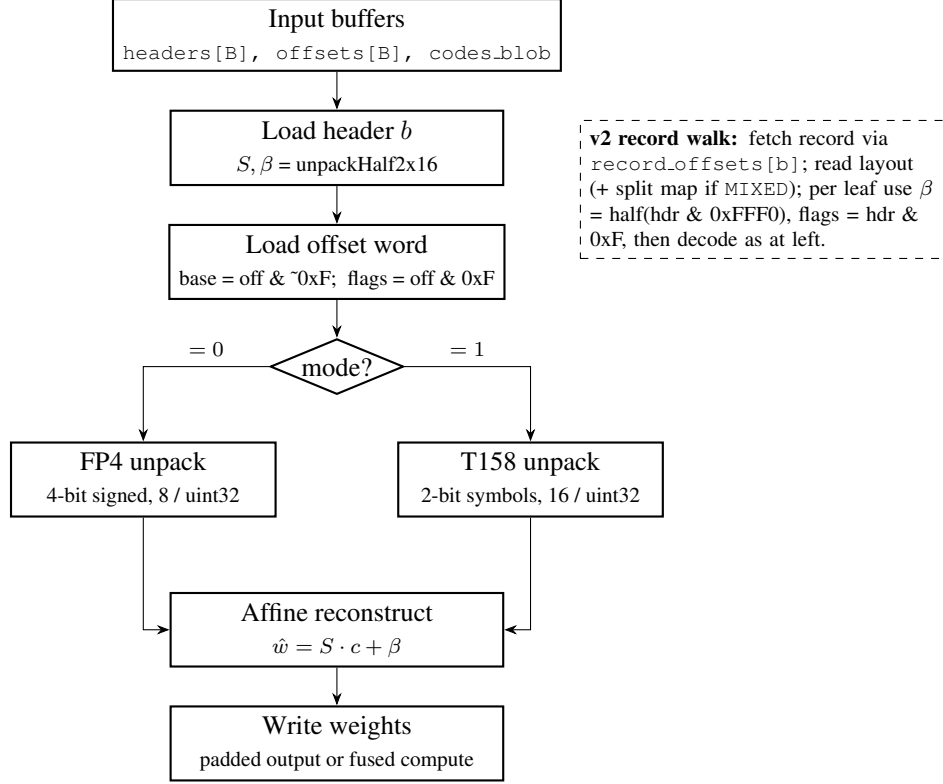


Figure 4: GPU unpack and affine reconstruction flow (v1 path shown; dashed note gives the v2 record walk).

7 GPU Decoding

The format is designed for high-throughput decoding with predictable memory access: fixed (v1) or per-record-aligned (v2) payloads enable vectorized loads; flags ride in words the decoder fetches anyway; and per-weight work is a shift, a mask, a sign-extend or symbol map, and one FMA. A natural mapping assigns one workgroup per macroblock, decoding into shared memory for a fused dequantize–matmul, or to a padded output tensor for a standalone unpack pass.

7.1 Exemplary compute kernel (pseudocode)

Listing 1: Exemplary v1 unpack for FP4_AFFINE and T158_AFFINE. Orderings follow the normative packing of Section 4.3.

```

// Helpers
int int4_to_int(uint nib) {
    nib &= 15u;
    return (nib < 8u) ? int(nib) : int(nib) - 16;    // two's complement
}

int sym2_to_ternary(uint sym) {
    sym &= 3u;
    if (sym == 1u) return 1;
    if (sym == 2u) return -1;
    return 0;                                     // 00 -> 0; 11 reserved -> 0
}

```

```

// One workgroup decodes one 64x64 macroblock b (v1 profile)
void decode_block(uint b) {
    uint h      = headers[b];
    float S      = half_to_float(h >> 16);
    float Bias   = half_to_float(h & 0xFFFFu);

    uint off     = offsets[b];
    uint mode    = off & 0x1u;          // flag bit 0
    uint baseU32 = (off & ~0xFu) >> 2; // aligned bytes -> u32 index

    for (uint i = 0u; i < 4096u; ++i) { // in practice: strided by threads
        int c;
        if (mode == 0u) {                // FP4_AFFINE: 8 codes / word
            uint w = codes_blob[baseU32 + (i >> 3)];
            c = int4_to_int((w >> (4u * (i & 7u))) & 0xFu);
        } else {                          // T158_AFFINE: 16 codes / word
            uint w = codes_blob[baseU32 + (i >> 4)];
            c = sym2_to_ternary((w >> (2u * (i & 15u))) & 0x3u);
        }
        store_weight(b, i, S * float(c) + Bias);
    }
}

```

8 Verifiable Execution and Determinism

SGFP4 is the weight substrate of a decentralized inference network in which nodes accept *execution contracts* pinning model, container, kernel manifest, and sampling, and are verified by sampled teacher-forced replay against checkpoint tolerance bands [7]. Two properties of the format matter there.

First, the specification is *closed*: byte order, code ordering, the two’s-complement and symbol mappings, FP16 parameter encoding, the β flag-truncation rule, and reserved-bit behavior are all normative. A container therefore determines its decoded tensor exactly, and independent implementations can be validated against shared *conformance vectors* — golden containers with known bit-exact decodes — before being admitted as verifiers.

Second, the ternary mode is *integer-dominant*: codes are in $\{-1, 0, +1\}$, so the matmul inner product over codes can be computed exactly in integer arithmetic and scaled once per (sub-)block by S with a β correction term. Kernels built this way can register in the cheapest determinism class of the Execution Integrity System (bit-exact reference semantics), where verification is an output-hash comparison and spot-check redundancy is minimal; FP4-affine paths with floating-point accumulation register in a bounded-drift class with checkpoint-band comparison. The economic consequence is a gradient toward deterministic kernels: the more reproducible the decode-and-compute path, the cheaper the node is to verify and the better its effective margin. To our knowledge no mainstream quantization format is specified tightly enough to support this replay-based attestation across heterogeneous, mutually untrusting implementations; SGFP4 was designed to be.

9 Evaluation Protocol

This paper specifies the format; empirical results will follow in a companion report using the open reference pipeline. The protocol is fixed here so results are comparable:

- **Accuracy at matched density.** Perplexity and downstream task accuracy versus FP16, at matched effective bits/weight, for: v1 FP4-only, v1 hybrid (adaptive mode), v2 adaptive, and baselines NF4 [2], GGUF Q4_K [6], and GPTQ-4bit [4]. Report the v2 layout distribution and effective bits/weight per tensor.
- **Decode throughput.** Standalone unpack GB/s and weights/s, and end-to-end tokens/s with fused dequantize–matmul, on at least one desktop GPU, one mobile-class Vulkan device, and one Apple-silicon device (MoltenVK).
- **Ablations.** δ sweep for mode preference; per-level threshold sweep for the quadtree; Laplacian weighting on/off; L4 all-ternary- 4×4 versus plain FP4 at equal 4.0 bits/weight (Section 5).
- **Verification margins.** For the attestation use case: distribution of checkpoint-tensor distances between honest decodes across devices versus the distance to nearest cheaper substitutes (smaller models, coarser quantizations, stale adapters), establishing that tolerance bands forgive hardware but not weights [7].
- **Spatial-locality assumption.** The v2 quadtree assumes that quantization error clusters by *raw row/column position* within a macroblock, the same assumption that motivates quadtree coding in image and video codecs, where it holds because neighboring pixels are correlated. Weight matrices offer no such guarantee a priori: error may instead cluster by output channel, input feature, or activation magnitude, none of which need align with spatial locality in W . We treat this as open and report, per tensor, the correlation between quadtree leaf size and plausible non-spatial groupings (output-channel norm, calibration activation magnitude); a channel- or magnitude-guided permutation prior to tiling is a natural fallback if spatial locality proves weak.

10 Design Variants and Extensions

The design admits variants while preserving its GPU-friendly properties. **Macroblock geometry:** 64×64 (4096 weights) is a convenient default; 128×32 , 32×64 , or 128×64 tiles may better match particular tensor shapes and coalescing constraints. **Payload size and alignment:** other fixed sizes (1024 or 4096 bytes) and stronger alignments (32 bytes, freeing 5 flag bits) are possible; all alignment-derived flag capacity follows the same rule — 2^k -byte alignment frees k low bits. **Flag placement:** low bits of aligned offsets (v1), low bits of the packed parameter word (v2), a parallel flags array, or a small header region are interchangeable carriers; the two shipped profiles demonstrate the first two. **Additional code modes:** the mode space extends to 3-, 5-, or mixed-bit codes, per-channel variants, or small vector codebooks [3, 13], provided decode remains shift–mask–FMA class and, where verification matters, integer-exact reference semantics are specified. **Shared parameters:** subdivided layouts may derive per-tile parameters from shared values (e.g. shared β with per-tile scale deltas) to revisit fixed-payload subdivision under the budget of Table 2.

11 Conclusion

SGFP4 combines an affine dual-mode code system with two container profiles: fixed 2048-byte macroblock payloads for uniform addressing and maximal decode regularity, and a quadtree-adaptive profile that spends bits where an error-driven encoder finds them necessary. The specification is deliberately closed — endianness, code order, parameter encoding, and reserved behavior are normative — because the format is asked to do something unusual for a quantization container: serve as the reproducible substrate for verifying that untrusted machines ran the model they claimed. Fixed layouts make GPUs fast; closed semantics make strangers checkable.

References

- [1] Tim Dettmers, Mike Lewis, Younes Belkada, and Luke Zettlemoyer. LLM.int8(): 8-bit matrix multiplication for transformers at scale. *arXiv preprint arXiv:2208.07339*, 2022.
- [2] Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. QLoRA: Efficient finetuning of quantized LLMs. *arXiv preprint arXiv:2305.14314*, 2023.
- [3] Vage Egiazarian, Andrei Panferov, Denis Kuznedelev, Elias Frantar, Artem Babenko, and Dan Alistarh. Extreme compression of large language models via additive quantization. *arXiv preprint arXiv:2401.06118*, 2024.
- [4] Elias Frantar, Saleh Ashkboos, Torsten Hoefer, and Dan Alistarh. GPTQ: Accurate post-training quantization for generative pre-trained transformers. *arXiv preprint arXiv:2210.17323*, 2022.
- [5] Elias Frantar, Roberto L. Castro, Jiale Chen, Torsten Hoefer, and Dan Alistarh. MARLIN: Mixed-precision auto-regressive parallel inference on large language models. *arXiv preprint arXiv:2408.11743*, 2024.
- [6] Georgi Gerganov and contributors. llama.cpp: LLM inference in C/C++ (GGUF k-quant block formats). <https://github.com/ggml-org/llama.cpp>, 2023.
- [7] GNUS.AI. Genius cognitive system: Product and technical design specification. <https://gcs.gnus.ai>, 2026. Architecture documentation; see the Execution Integrity System and SGFP4 chapters.
- [8] Sehoon Kim, Coleman Hooper, Amir Gholami, Zhen Dong, Xiuyu Li, Sheng Shen, Michael W. Mahoney, and Kurt Keutzer. SqueezeLLM: Dense-and-sparse quantization. *arXiv preprint arXiv:2306.07629*, 2023.
- [9] Ji Lin, Jiaming Tang, Haotian Tang, Shang Yang, Wei-Ming Chen, Wei-Chen Wang, Guangxuan Xiao, Xingyu Dang, Chuang Gan, and Song Han. AWQ: Activation-aware weight quantization for LLM compression and acceleration. *arXiv preprint arXiv:2306.00978*, 2023.
- [10] Shuming Ma, Hongyu Wang, Lingxiao Ma, Lei Wang, Wenhui Wang, Shaohan Huang, Li Dong, Ruiping Wang, Jilong Xue, and Furu Wei. The era of 1-bit LLMs: All large language models are in 1.58 bits. *arXiv preprint arXiv:2402.17764*, 2024.
- [11] Open Compute Project. OCP microscaling formats (MX) specification, version 1.0. <https://www.opencompute.org/documents/ocp-microscaling-formats-mx-v1-0-spec-final-pdf>, 2023.
- [12] Bitá Darvish Rouhani, Ritchie Zhao, Ankit More, Mathew Hall, Alireza Khodamoradi, Summer Deng, Dhruv Choudhary, Marius Cornea, Eric Dellinger, Kristof Denolf, et al. Microscaling data formats for deep learning. *arXiv preprint arXiv:2310.10537*, 2023.
- [13] Albert Tseng, Jerry Chee, Qingyao Sun, Volodymyr Kuleshov, and Christopher De Sa. QuIP#: Even better LLM quantization with hadamard incoherence and lattice codebooks. *arXiv preprint arXiv:2402.04396*, 2024.

A Container Field Summary

v1 fixed-payload profile

- `headers[b]`: `uint32`; bits 31–16 = FP16 scale S ; bits 15–0 = FP16 bias β .
- `offsets[b]`: `uint32`; bits 31–4 = payload byte offset (16-byte aligned); bit 0 = mode; bit 1 = `ERROR_HINT`; bits 2–3 reserved (0).
- `codes_blob`: B payloads of exactly 2048 bytes; packing per Section 4.3.

v2 quadtree-adaptive profile

- File: `'SGF4'` || `0x02` || `uint32 B` || `pad-to-16` || `uint32 record_offsets[B]` || `pad-to-16` || records (record region base = $\text{align}_{16}(16 + 4B)$). Tensor shape (O, I) is supplied by the enclosing model manifest.
- Record: `uint32 sb_header` (bits 0–2 layout, Table 3) || [MIXED: $3 \times \text{uint32}$ split map, 85 bits, pre-order DFS, quadrants TL/TR/BL/BR] || N leaf headers || `pad-to-16` || N payloads (each padded to 16 bytes).
- Leaf header: `uint32`; bits 31–16 = FP16 S ; bits 15–4 = high 12 bits of FP16 β (low 4 mantissa bits truncated to zero); bit 0 = mode; bits 1–3 reserved (0) (`ERROR_HINT` exists only as a v1 offset flag).
- Leaf payload: $n^2/8$ (mode 0) or $n^2/16$ (mode 1) little-endian `uint32` words, row-major weight order, packing per Section 4.3.