# Reproducible bioinformatics


from a user's perspective


The University of Otago

tom.harrop@otago.ac.nz

@tharrop\_

2020-02-12



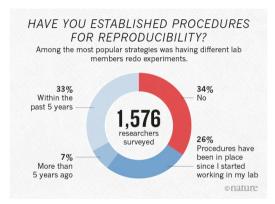

## What is reproducibility?

**Reproduce**: under identical conditions to the previous result, repeat the analysis and get the **exact** same result

#### In bioinformatics:

- same data
- same methodology (code)
- same result

Guidelines for reproducible analysis:

- 1. Don't modify raw data
- 2. Record the code
- 3. Capture the computing environment

### 1. Take care peeking at the data

Ziemann et al. Genome Biology (2016) 17:177 DOI 10.1186/s13059-016-1044-7

Genome Biology

#### COMMENT

**Open Access** 



# Gene name errors are widespread in the scientific literature

Mark Ziemann<sup>1</sup>, Yotam Eren<sup>1,2</sup> and Assam El-Osta<sup>1,3\*</sup>


#### Abstract

The spreadsheet software (Microsoft Exce) when used with default settings, is known to convert gene names to dates and floating-point numbers. A programmatic scan of leading genomics journals reveals that approximately one-fifth of papers with supplementary Excel gene lists contain erroneous gene name conversions.

Keywords: Microsoft Excel, Gene symbol, Supplementary data

**Abbreviations:** GEO, Gene Expression Omnibus; JIF. journal impact factor

## Point-and-click analysis may be hard to reproduce

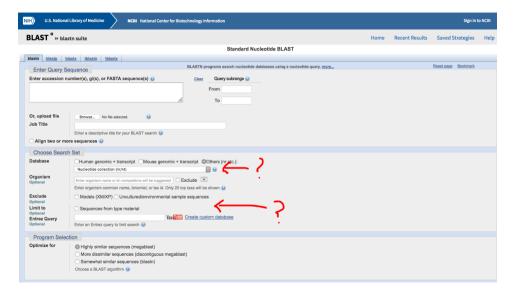

# Ad hoc analysis may be hard to reproduce

#### **Examples:**

- install software locally
- use software installed by the admin
- type your commands directly into the console and hit enter!
- save a set of scripts to run in order

#### Possible issues:

- will it run again?
- are all the steps documented?
- is the code you recorded the same as the code you ran?
- did you correctly record the order of steps?

# 2. Workflow managers force you to record every step


```
my_workflow:
```

```
step trim_adaptors:
    input: 'data/raw_reads/{sample}.fastg'.
                                                       trim adaptors
    output: 'output/trimmed/{sample}.fastq'
    shell: 'trim_adaptors --raw_reads={input} > {out
step run_assembly:
    input: 'output/trimmed/{sample}.fastq'
    output: 'output/assemblies/{sample}.fasta'
                                                       run assembly
    shell: 'choice_assembler --reads={input} > {outp
```

Run:

workflow\_manager my\_workflow run\_assembly

### 2. Reproducibility and convenience

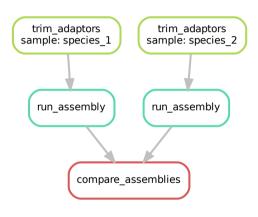

- The code is the documentation
- Scale the same code to different data
- Version control → versioned results

```
Lots of good options:
```

## 3. Reproducible computing environment

#### Software has

- a version.
- other software **dependencies** (with versions)
- all with system dependencies

e.g. DESeq2
DESeq2\_1.26.0
Bioconductor 3.10.1
libblas3 3.8.0, libc6 2.30, etc.

## 3. Reproducible computing environment

# On our department's hardware: salmon --version salmon 0.9.1 e.g. Ubuntu 19.10: apt policy salmon salmon: Installed: (none) Candidate: 0.12.0+ds1-1 Version table: 0.12.0+ds1-1 500 500 http://nz.archive.ubuntu.com/ubuntu eoan/universe amd64 Package

#### 3. Software containers

- Isolated, complete environment (a mini OS)
- Contain specific version of software with dependencies

#### Singularity:

- Mobility of compute
- Reproducibility
- Support on existing traditional HPC





# 3. Singularity containers

```
Running directly:
```

```
salmon --help
```

```
Command 'salmon' not found, but can be installed with: sudo apt install salmon
```

#### **Running with Singularity:**


```
singularity exec salmon_1.1.0.sif \
  salmon --help
```

```
Usage: salmon -h|--help or
    salmon -v|--version or
    salmon -c|--cite or
    salmon [--no-version-check] <COMMAND> [-h | options]
```

# 3. Getting software in containers

• Some developers provide docker containers

```
singularity pull \
    --name salmon_1.1.0.sif \
    docker://combinelab/salmon:1.1.0
```



### 3. Getting software into containers

Usually have to build it yourself

#### Singularity.bwa\_0.7.17

```
Bootstrap: docker
From: ubuntu:18.10
%labels
    VERSTON "BWA 0.7.17"
%post
    apt-get update
    apt-get install -y bwa
%runscript
    exec /usr/bin/bwa "$@"
```



## 3. Some barriers to container usage

- Building containers can be painful if the dependencies are disorganised
- Duplication of effort
- Some software can't shouldn't go in a container because of "unfortunate licensing issues"
  - DTU software e.g. rnammer, tmhmm
  - GATech: GeneMark
  - GIRInst's RepBase
- Getting Singularity installed

# 2 & 3. Workflow managers support containers and clusters

```
rule trim adaptors:
                     'data/raw_reads/{sample}.fastq',
    input:
                     'output/trimmed/{sample}.fastg'
    output:
    singularity:
                     'docker://my_repos/trim_adaptors:2.9'
                     'trim adaptors --raw_reads={input} > {output}'
    shell:
rule run_assembly:
                      'output/trimmed/{sample}.fastq'
    input:
                      'output/assemblies/{sample}.fasta'
    output:
                      'shub://mv_repos/choice_assembler:1.5'
    singularity:
                      'choice_assembler --reads={input} > {output}'
    shell:
```

#### Cluster execution, e.g.:

```
snakemake --drmaa " -q username" -j 32
```

## Reproducible analysis stack

#### **Guidelines:**

- 1. Don't modify raw data
- 2. Record the code (with version control)
- 3. Capture the computing environment

#### Stack:

md5sum raw\_reads.fastq?chmod 444?

- + Workflow manager (snakemake, nextflow)
- + VCS (git)
- + Software containers (Singularity)



### Getting started

#### Reproducibility for bioinformatics:

• online lectures e.g. Adam Labadorf of Boston Uni

#### Workflow managers:

Snakemake Tutorial

Nextflow: Get started

#### Software containers:

Singularity Quick Start

#### Version control:

• memorise a handful of git commands