

Universidad Mariano Gálvez

Geoffrey Estiven Hernández Franco

7690-14-3807

Administración de tecnología

Examen corto


Replication Master Server (default)
binary logging is required for replication
log-bin deactivated by default since XAMPP 1.4.11
log-bin=mysql-bin
binlog_do_db = adminbd





Agregar un usuario	de replicación esclavo		
Nombre de usuario:	Use el campo de tex: 🗸	geo	
Servidor:	Use el campo de tex: 🗸	192.168.0.24	@
Contraseña:	Use el campo de text ✔	*******	
Debe volver a escribir:		*******	
Generar contraseña:	Generar		
Continuar			
-	IDENTIFIED VIA mysql_native_password U MAX_CONNECTIONS_PER_HOUR 0 MAX_UPDATES	SING '***';GRANT USAGE ON *.* TO 'geo' _PER_HOUR @ MAX_USER_CONNECTIONS 0;	@'192.168.0.24' REQUIRE
ditar en línea][Editar][Crear código P	HP]		

1 use adminbd;
2 flush TABLEs white read lock;

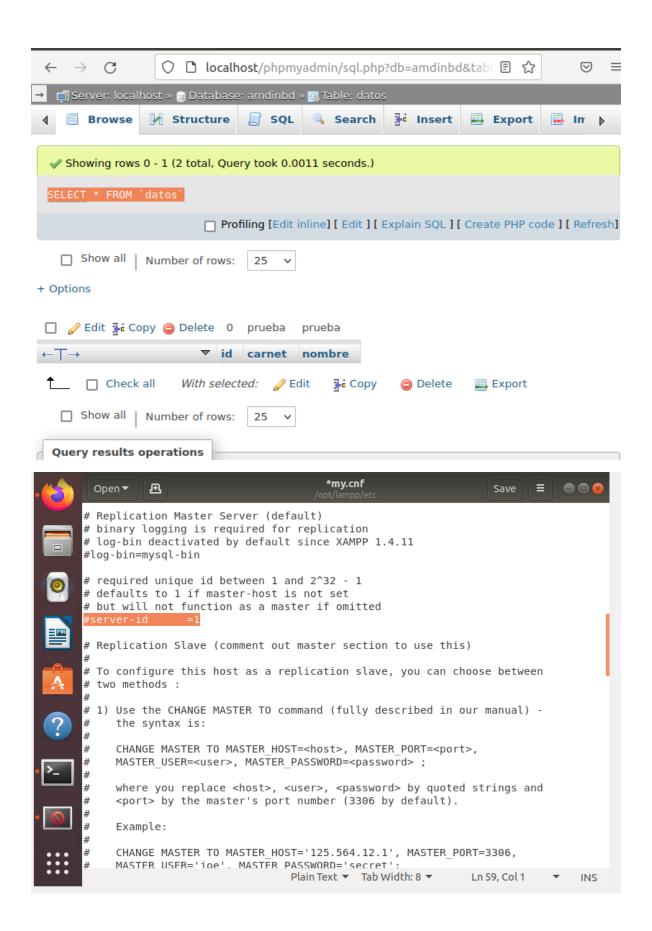

El servidor está configurado como esclavo en un proceso de replicación. Deseas:

· Ver la tabla de estado del esclavo

Variable	Valor
Slave_IO_State	Connecting to master
Master_Host	192.168.0.26
Master_User	geo
Master_Port	3306
Connect_Retry	60
Master_Log_File	mysql-bin.000002
Read_Master_Log_Po	os 658
Relay_Log_File	mysql-relay-bin.000001
Relay_Log_Pos	4
Relay_Master_Log_Fi	le mysql-bin.000002
Slave_IO_Running	Connecting
Slave_SQL_Running	Yes
Replicate_Do_DB	
Replicate_Ignore_DB	
Replicate_Do_Table	
Replicate_Ignore_Tab	le
Replicate_Wild_Do_Ta	able
Replicate_Wild_Ignore	e_Table
Last_Errno	0
Last_Error	
Skip_Counter	0
Consola Evac Master Log Po	c 650