

Performance report

choreography-mqueue | test_dual_core_mix_1

Generated	2026-09-24 21:10:39
Schedule	Configurable CPU/IO Benchmark
Iterations in logs	100 (#0 - #99), manifest declares 100
Tasks	1=stress_task_1, 2=stress_task_2, 3=stress_task_3, 4=stress_task_4, 5=stress_task_5, 6=stress_task_6, 7=stress_task_1, 8=stress_task_2, 9=stress_task_3, 10=stress_task_4, 11=stress_task_5, 12=stress_task_6
Cores used	4, 5
PERF records	1197 (3 malformed skipped)
Log sources	stress_task_1.log, stress_task_2.log, stress_task_3.log, stress_task_4.log, stress_task_5.log, stress_task_6.log
Manifest	tests/test_0_code/manifest.yaml

Statistics summary

All values in milliseconds | samples per task: 99-100 iteration(s) | tasks 1-6

Task ID	Image name	Metric	Mean	Std Dev	Min	Max	Median	p99
1	stress_task_1	q_em_tw_ms	0.062	0.014	0.051	0.194	0.059	0.084
		t_in_tw_ms	88.304	0.520	86.758	89.381	88.546	88.707
		q_tw_em_ms	0.008	0.006	0.004	0.028	0.006	0.027
		total_ms	88.373	0.523	86.839	89.579	88.609	88.790
2	stress_task_2	q_em_tw_ms	0.057	0.013	0.048	0.178	0.054	0.079
		t_in_tw_ms	265.596	0.462	264.547	267.166	265.637	266.310
		q_tw_em_ms	0.006	0.003	0.004	0.028	0.005	0.012
		total_ms	265.658	0.467	264.605	267.356	265.700	266.369
3	stress_task_3	q_em_tw_ms	0.054	0.014	0.047	0.182	0.052	0.066
		t_in_tw_ms	88.521	0.201	88.118	89.411	88.588	88.744
		q_tw_em_ms	0.008	0.006	0.004	0.043	0.006	0.024
		total_ms	88.582	0.207	88.174	89.598	88.648	88.809
4	stress_task_4	q_em_tw_ms	68.531	0.451	67.539	69.480	68.575	69.315
		t_in_tw_ms	88.517	0.283	87.395	89.190	88.656	88.773
		q_tw_em_ms	0.005	0.002	0.003	0.017	0.004	0.016
		total_ms	157.052	0.556	155.856	158.675	157.012	158.057
5	stress_task_5	q_em_tw_ms	0.057	0.013	0.049	0.183	0.055	0.073
		t_in_tw_ms	94.711	22.653	87.150	177.359	88.630	177.098
		q_tw_em_ms	0.006	0.003	0.005	0.019	0.006	0.018
		total_ms	94.774	22.652	87.216	177.425	88.698	177.156
6	stress_task_6	q_em_tw_ms	5.068	13.021	0.052	39.353	0.059	39.287
		t_in_tw_ms	119.445	15.551	87.215	128.200	126.977	128.127
		q_tw_em_ms	0.005	0.002	0.004	0.017	0.004	0.015
		total_ms	124.517	9.930	88.192	128.297	127.212	128.266

Statistics summary


All values in milliseconds | samples per task: 99-100 iteration(s) | tasks 7-12

Task ID	Image name	Metric	Mean	Std Dev	Min	Max	Median	p99
7	stress_task_1	q_em_tw_ms	0.037	0.013	0.026	0.161	0.035	0.055
		t_in_tw_ms	88.155	0.620	86.999	89.098	88.493	88.652
		q_tw_em_ms	0.006	0.004	0.003	0.031	0.005	0.022
		total_ms	88.198	0.623	87.041	89.275	88.534	88.708
8	stress_task_2	q_em_tw_ms	0.050	0.012	0.033	0.161	0.049	0.069
		t_in_tw_ms	265.658	0.505	263.740	267.010	265.765	266.434
		q_tw_em_ms	0.006	0.004	0.004	0.025	0.005	0.025
		total_ms	265.714	0.509	263.800	267.175	265.825	266.490
9	stress_task_3	q_em_tw_ms	0.038	0.012	0.033	0.149	0.036	0.047
		t_in_tw_ms	88.574	0.257	87.242	89.594	88.658	88.837
		q_tw_em_ms	0.007	0.005	0.004	0.032	0.005	0.029
		total_ms	88.619	0.261	87.285	89.747	88.704	88.881
10	stress_task_4	q_em_tw_ms	68.573	0.494	67.142	69.645	68.543	69.604
		t_in_tw_ms	88.498	0.300	87.119	88.952	88.628	88.784
		q_tw_em_ms	0.005	0.003	0.003	0.027	0.004	0.018
		total_ms	157.076	0.575	155.085	158.600	157.079	158.110
11	stress_task_5	q_em_tw_ms	0.035	0.012	0.022	0.146	0.033	0.052
		t_in_tw_ms	174.164	17.476	89.012	180.158	177.833	179.513
		q_tw_em_ms	0.006	0.003	0.004	0.020	0.006	0.018
		total_ms	174.205	17.476	89.050	180.194	177.870	179.663
12	stress_task_6	q_em_tw_ms	0.044	0.025	0.033	0.219	0.036	0.103
		t_in_tw_ms	90.431	7.686	87.747	128.576	89.094	127.769
		q_tw_em_ms	0.007	0.004	0.004	0.018	0.006	0.018
		total_ms	90.482	7.685	87.787	128.616	89.139	127.810

Execution plan - iteration 0 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

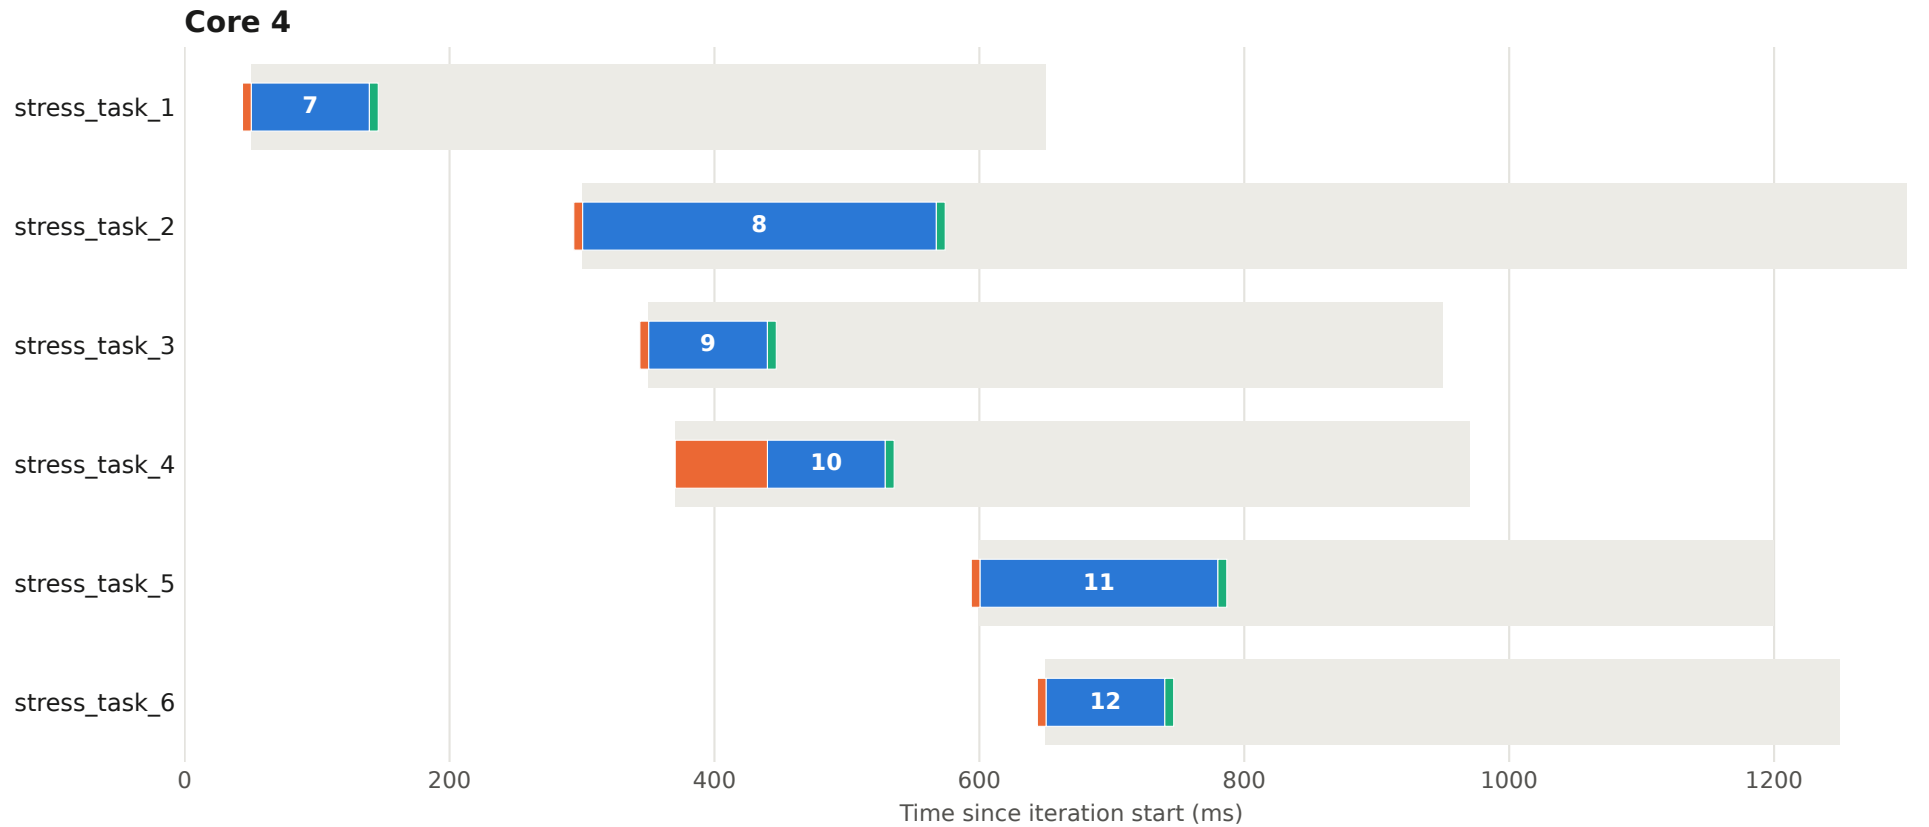


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 0 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

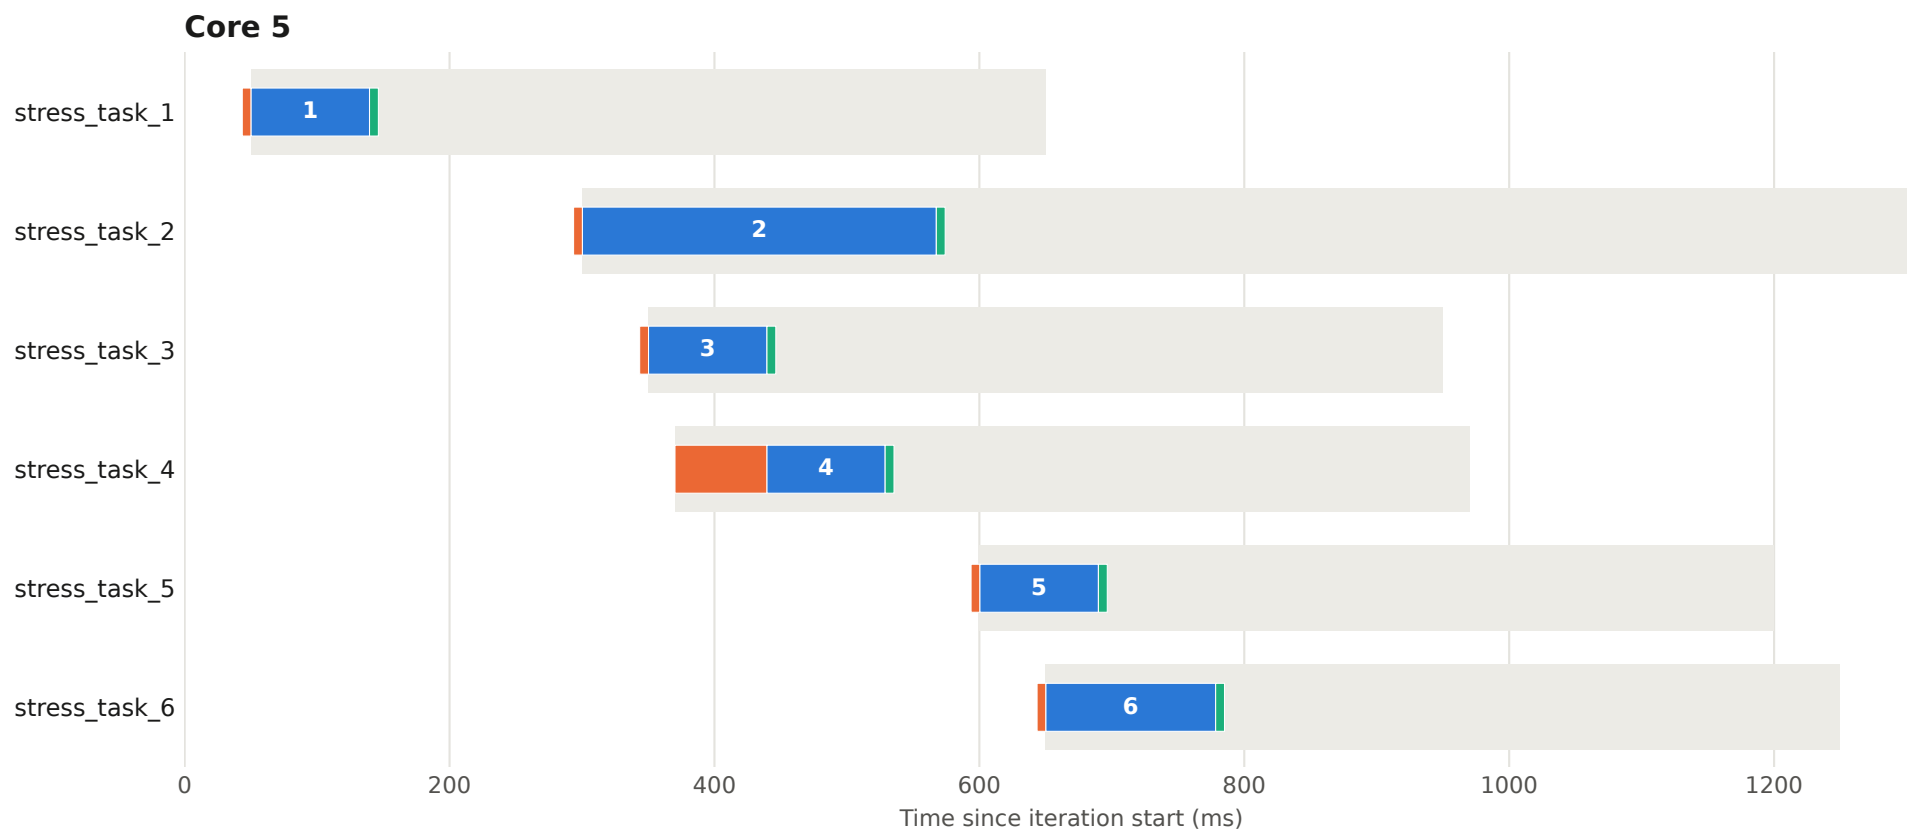


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 1 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

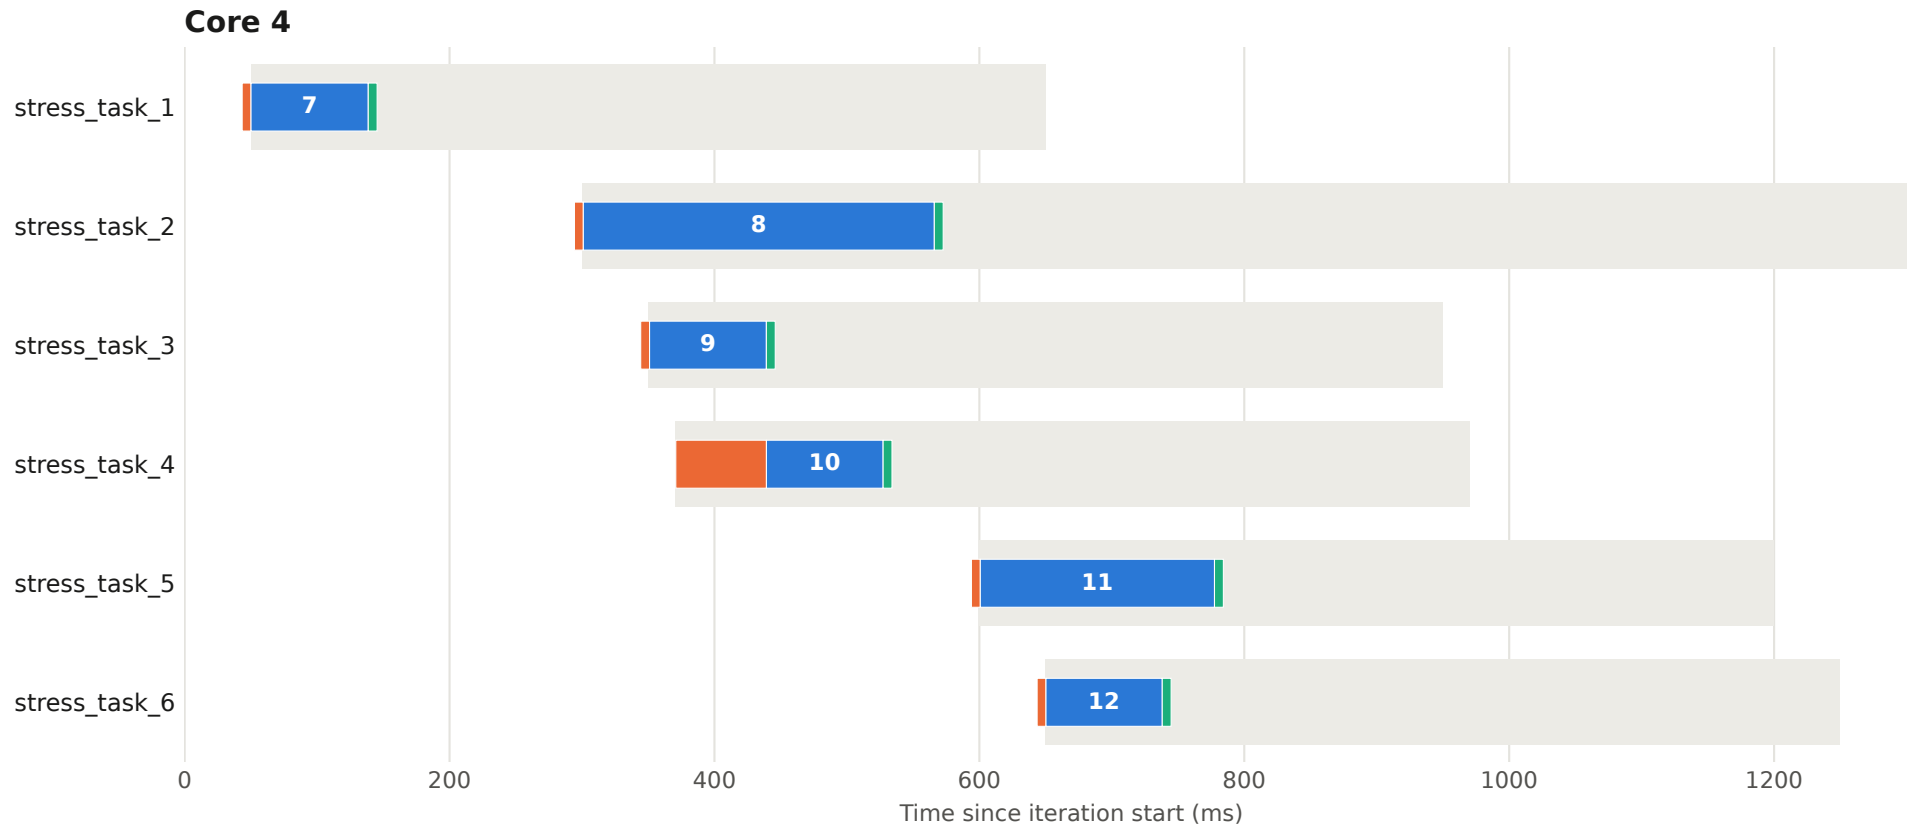


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 1 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

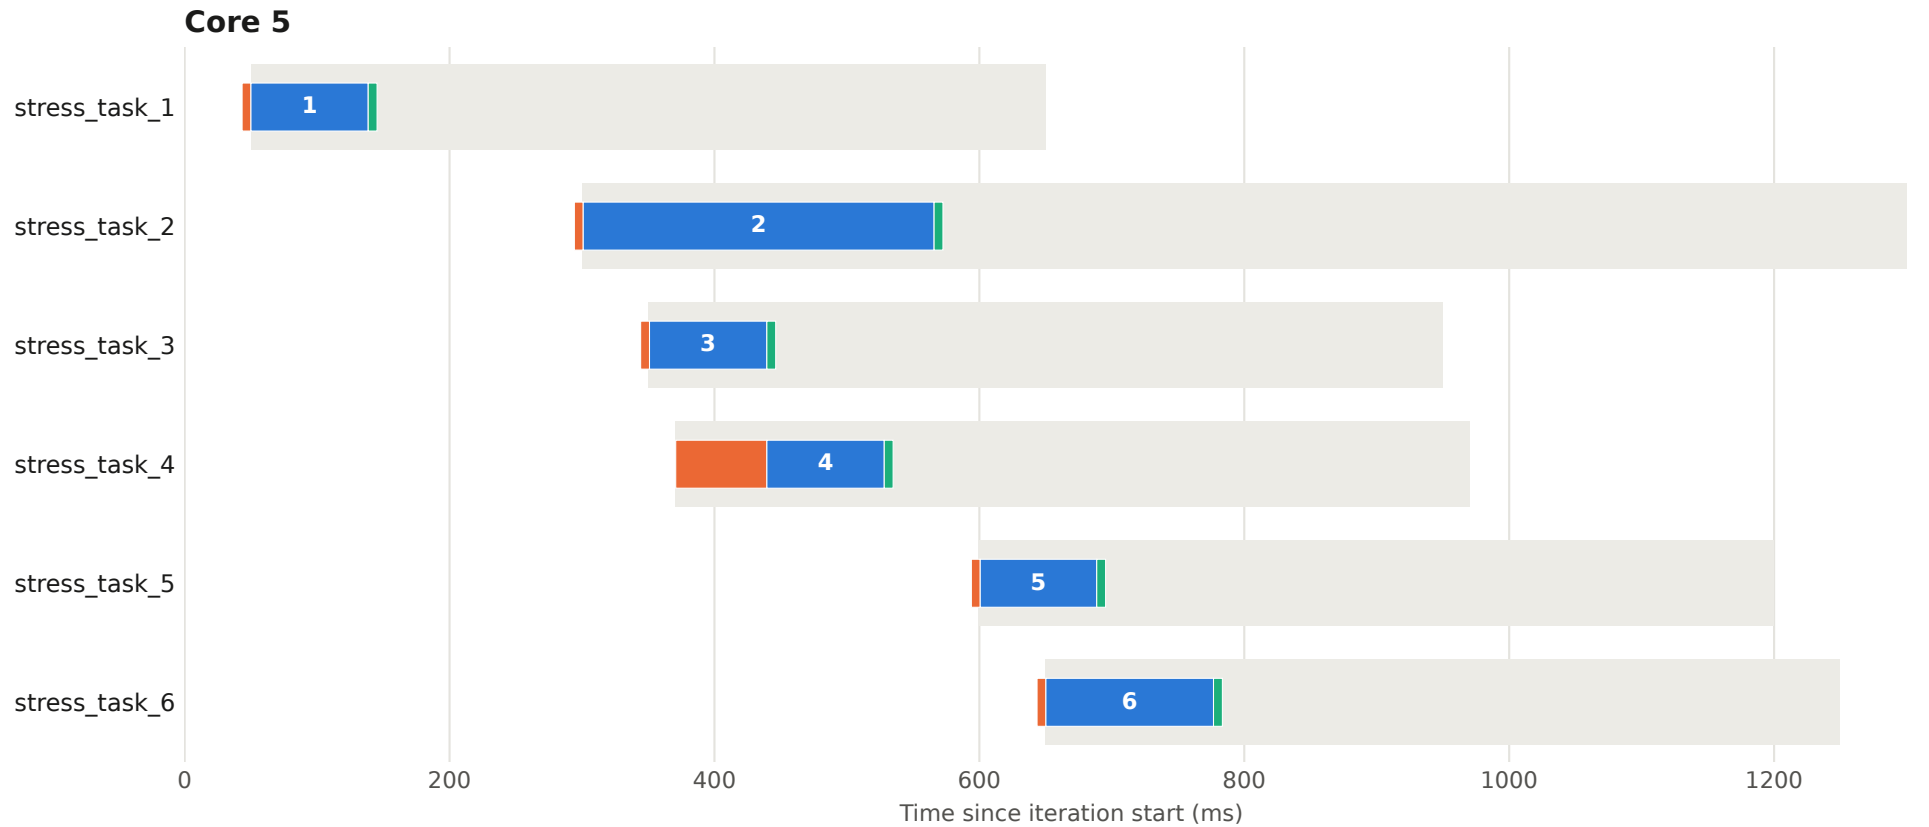


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 2 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

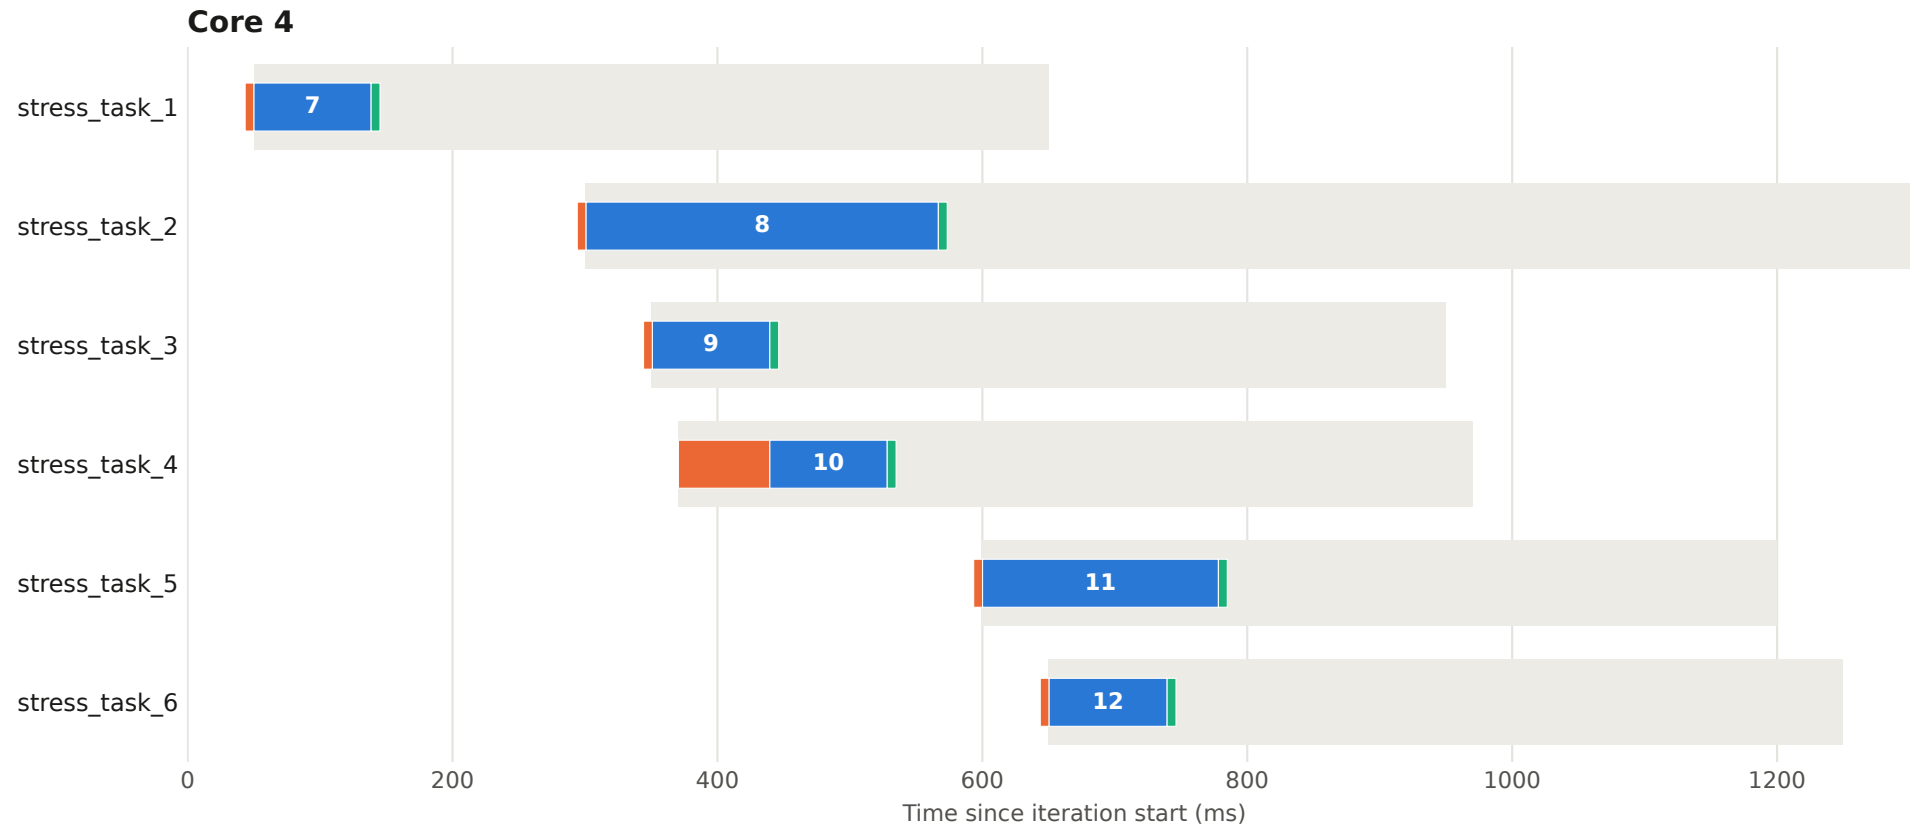


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 2 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

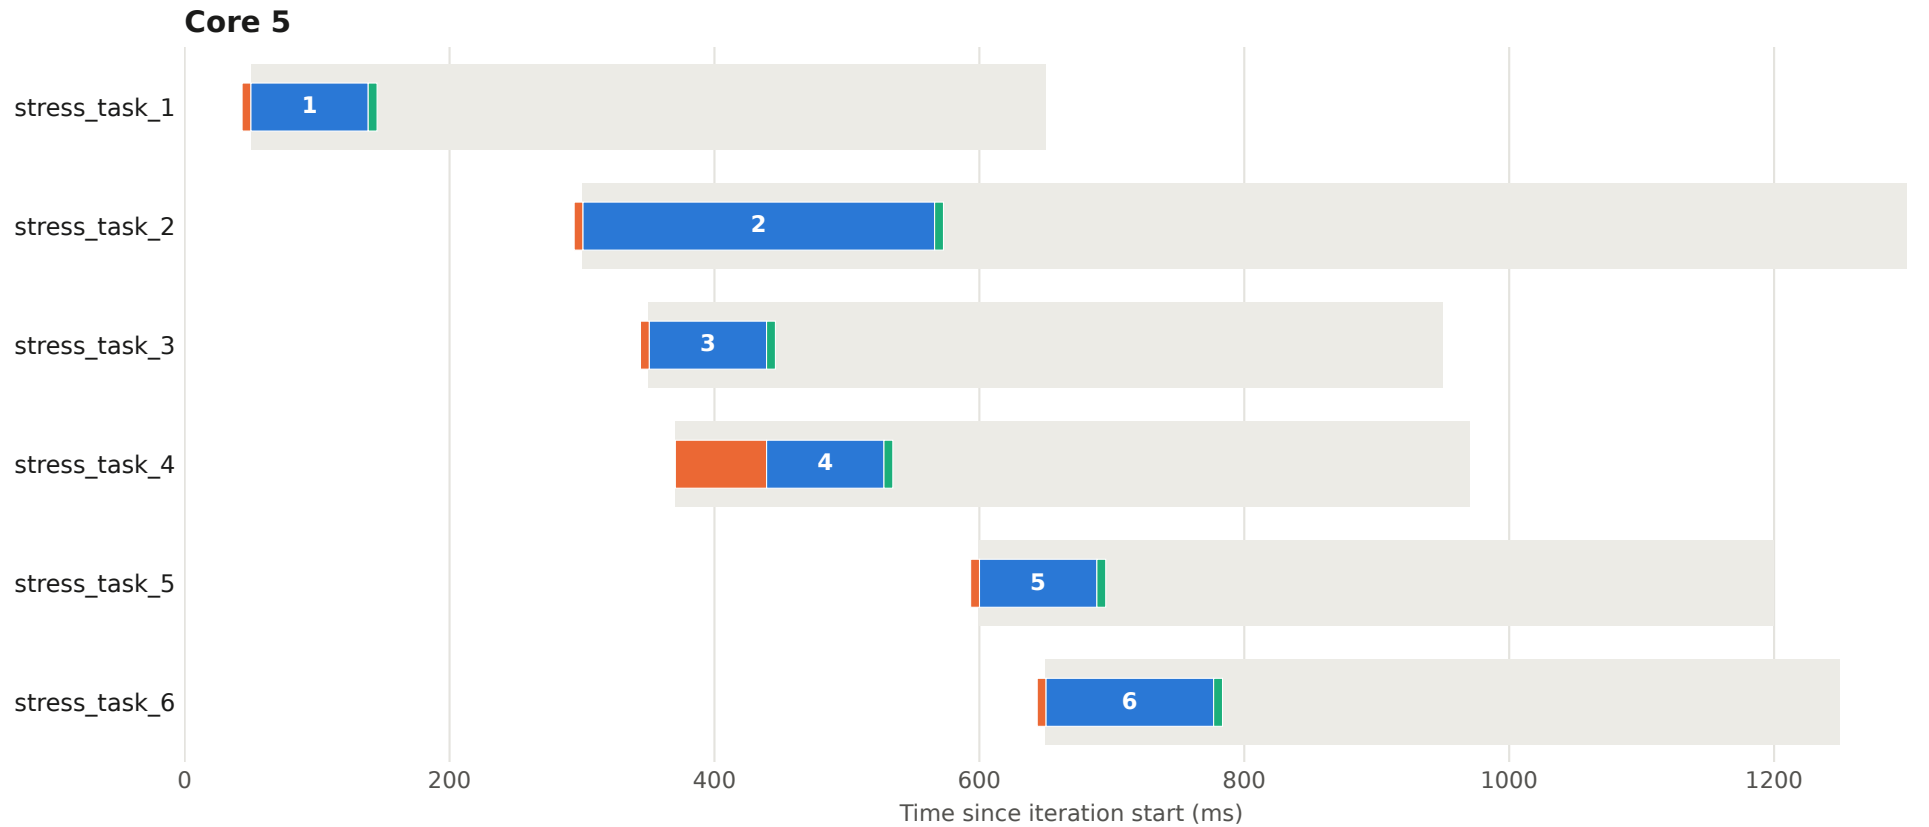


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 3 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

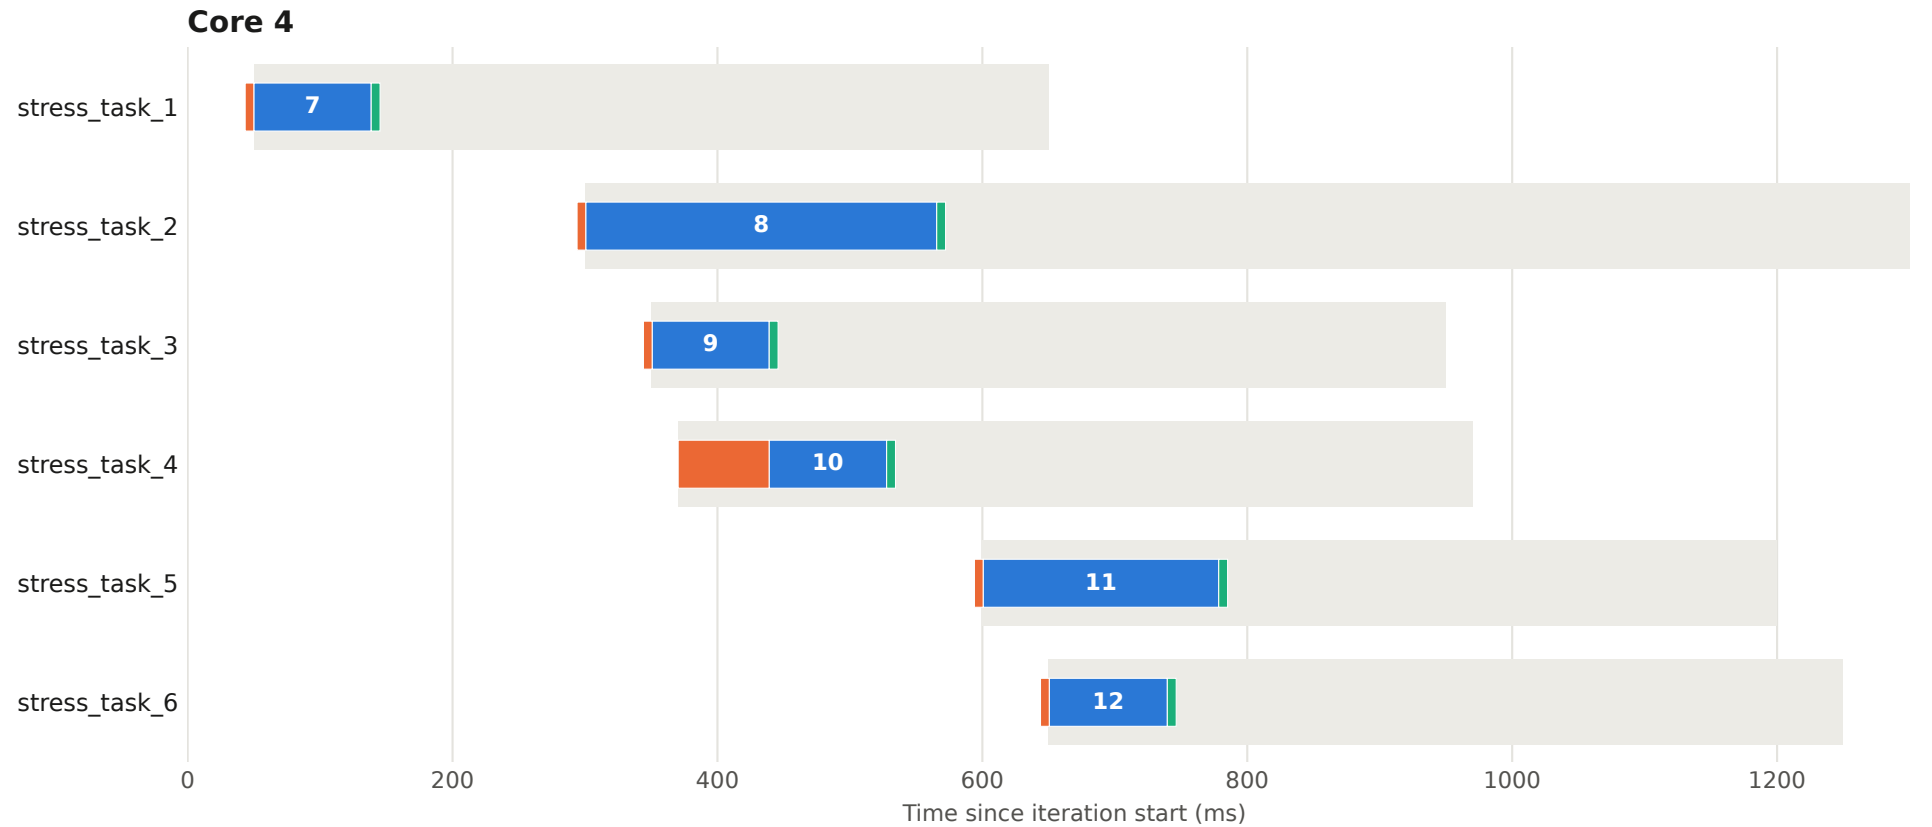


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 3 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

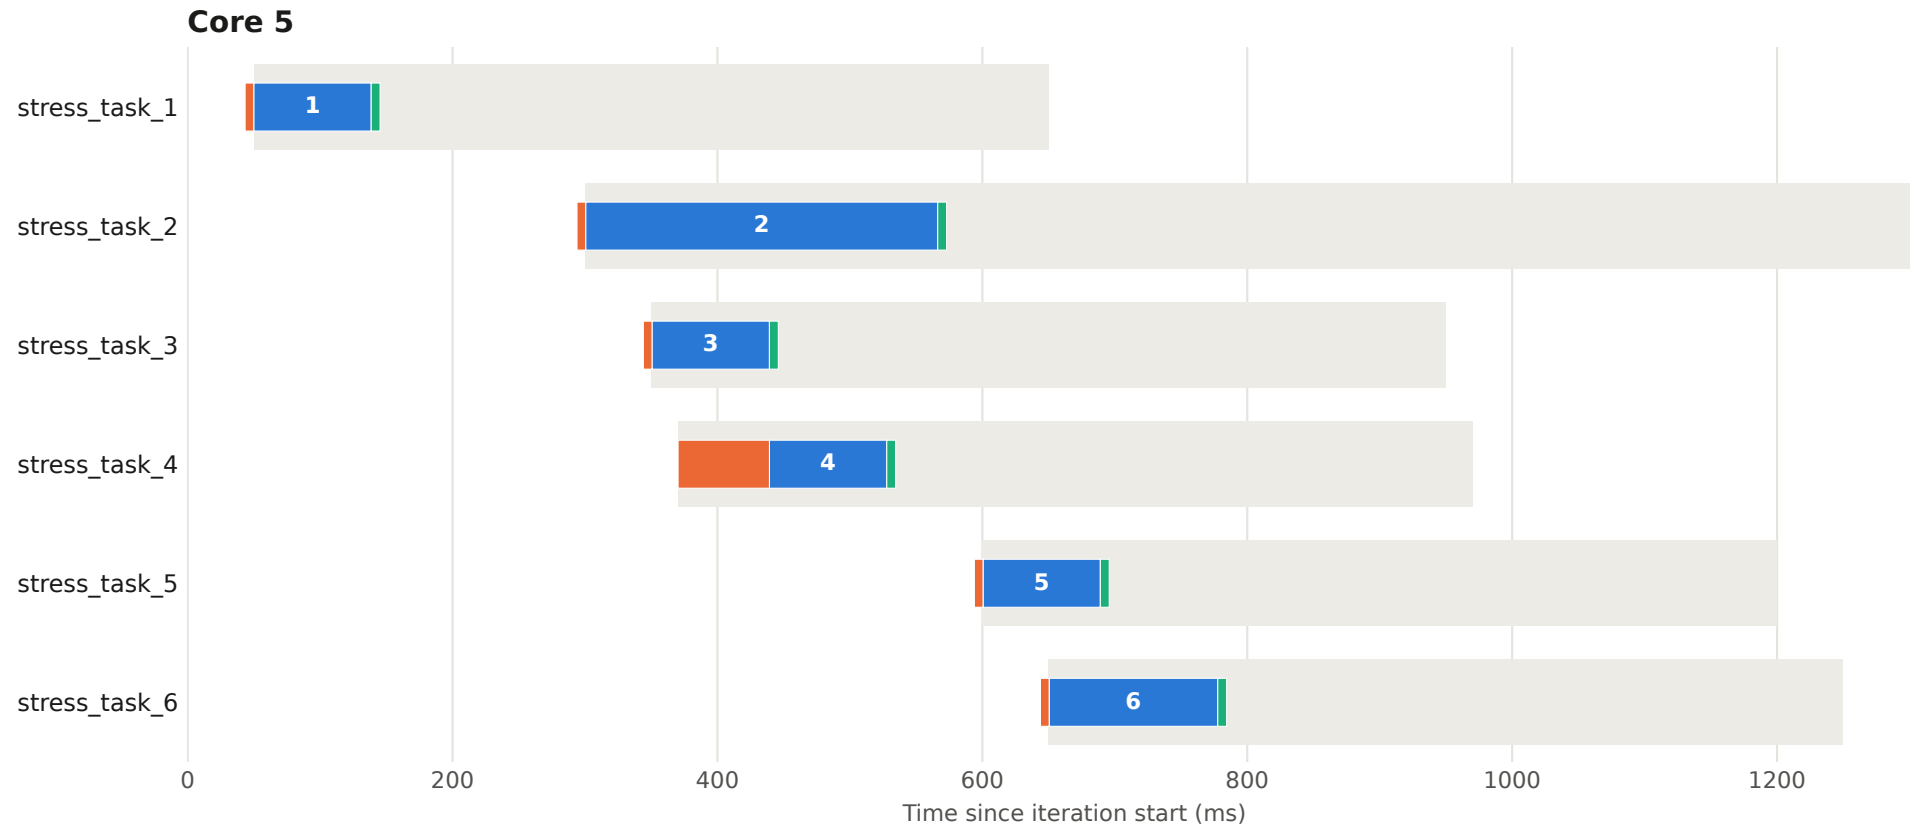


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 4 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

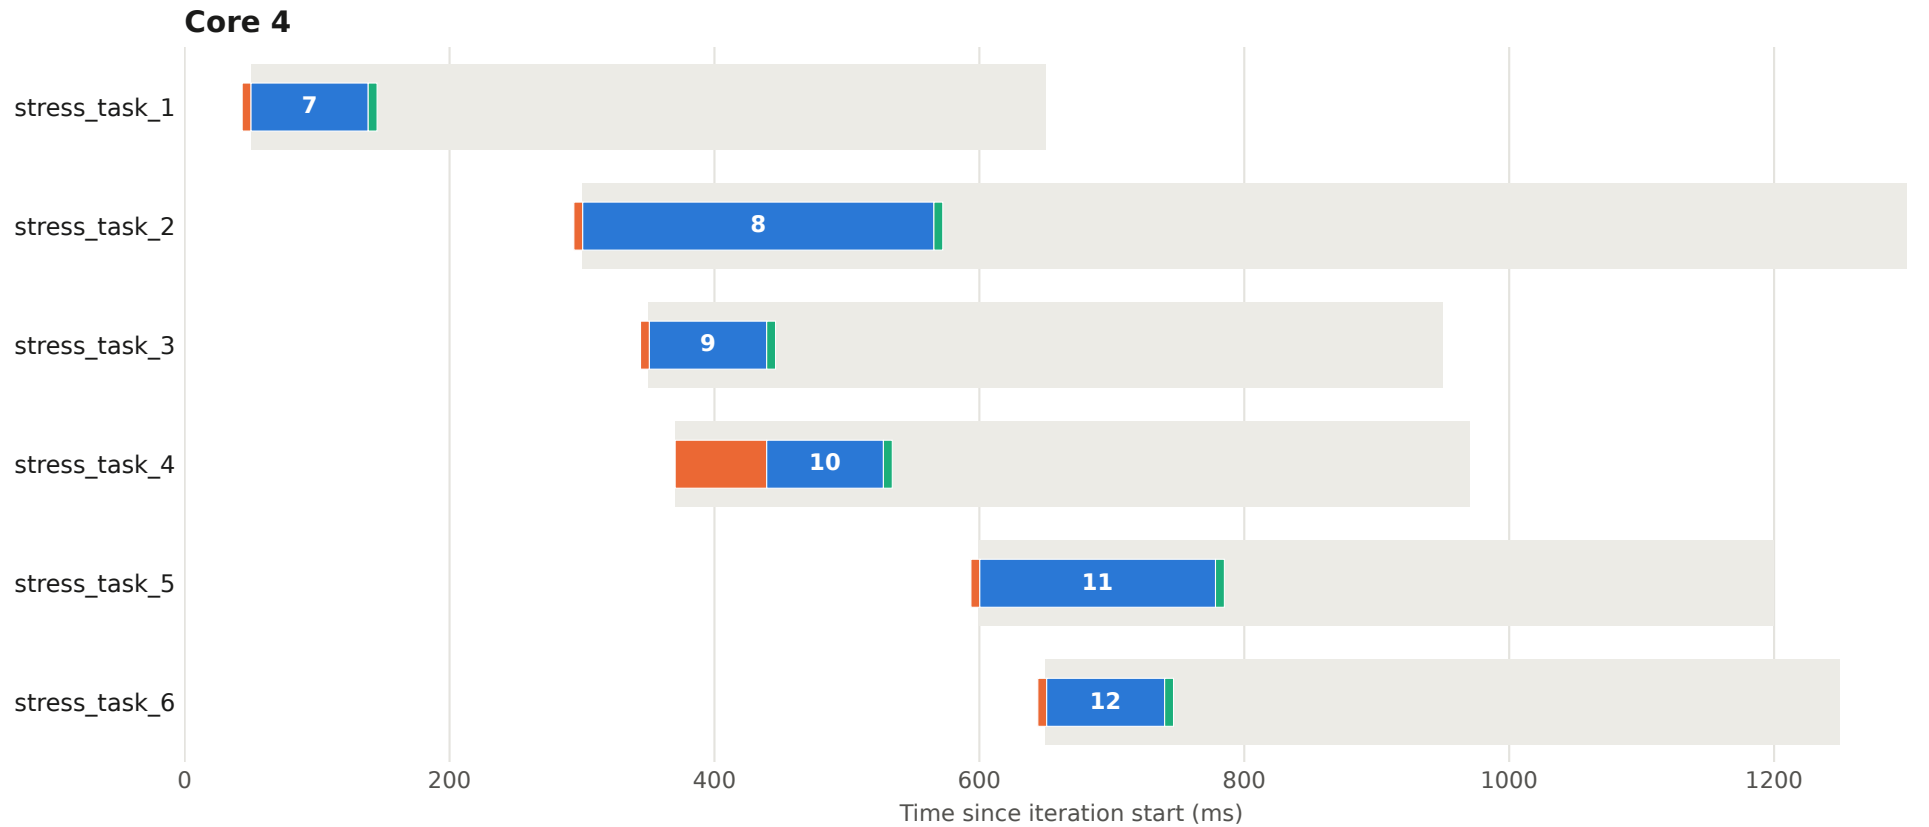


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 4 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

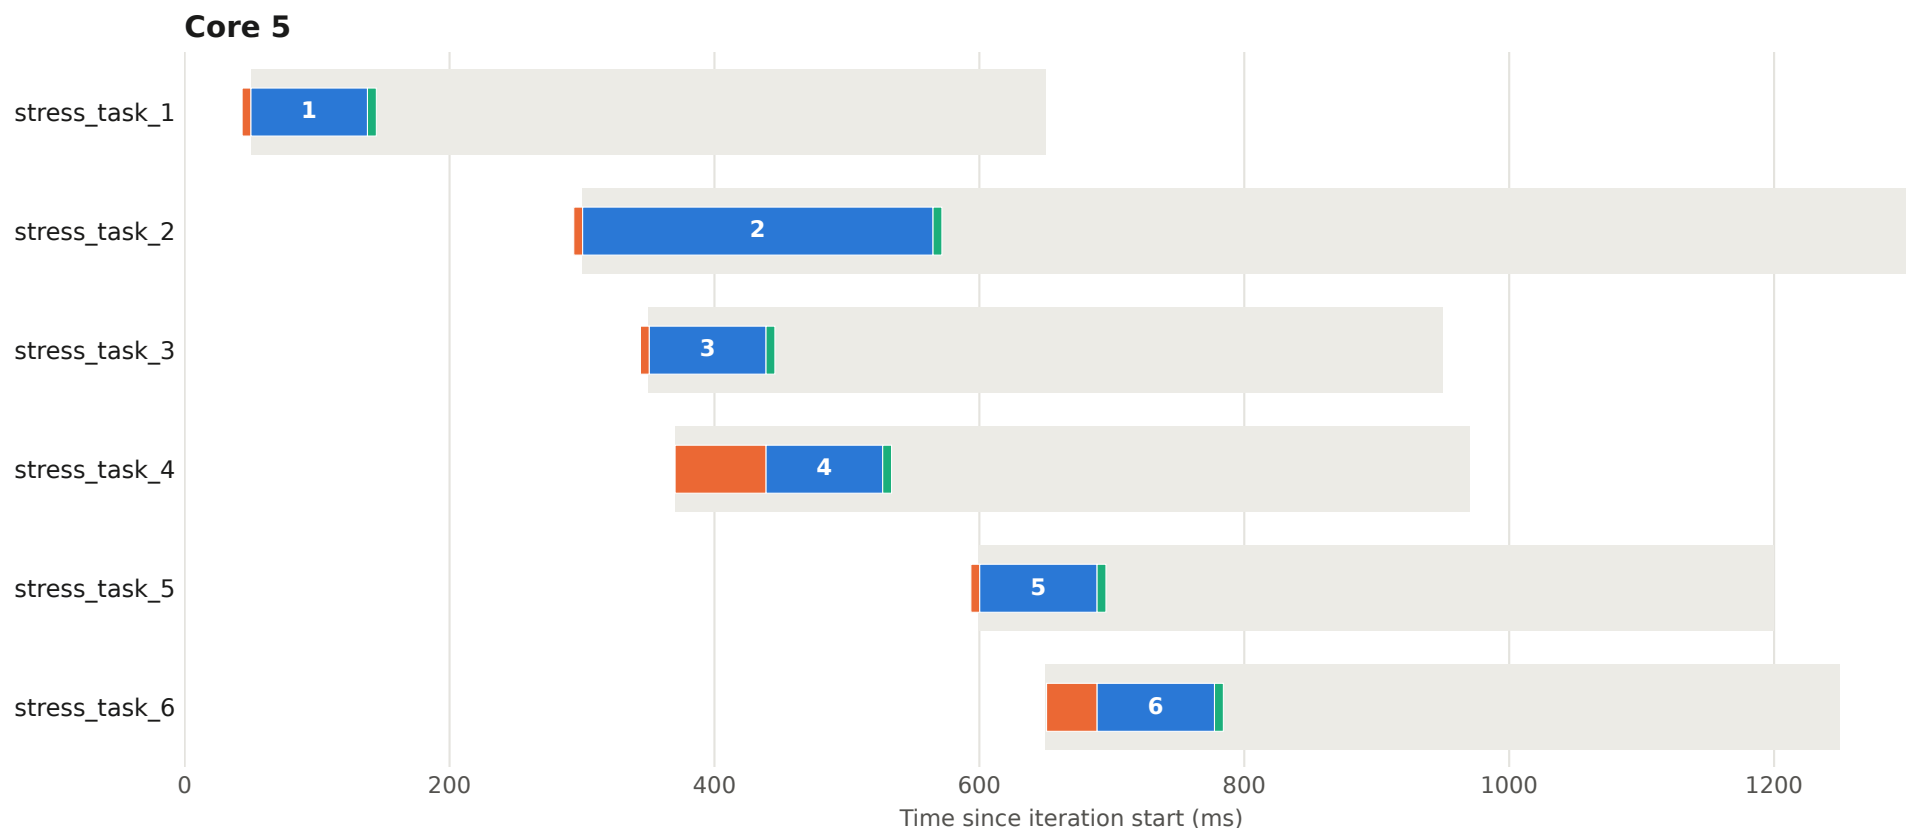


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 5 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

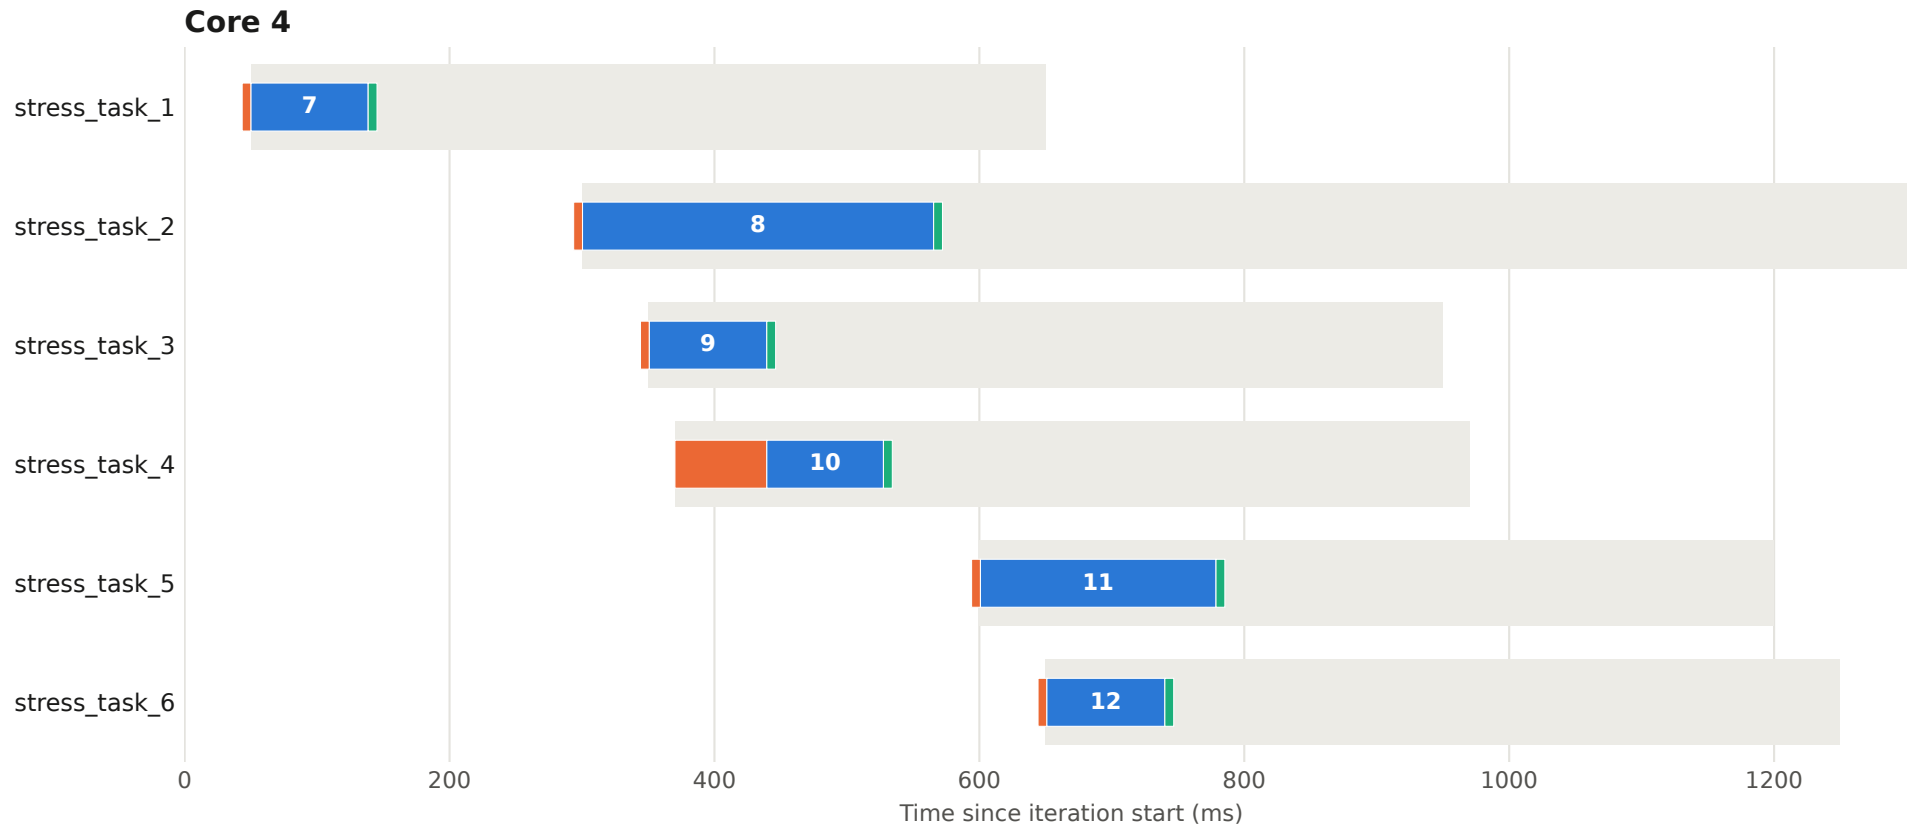


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 5 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

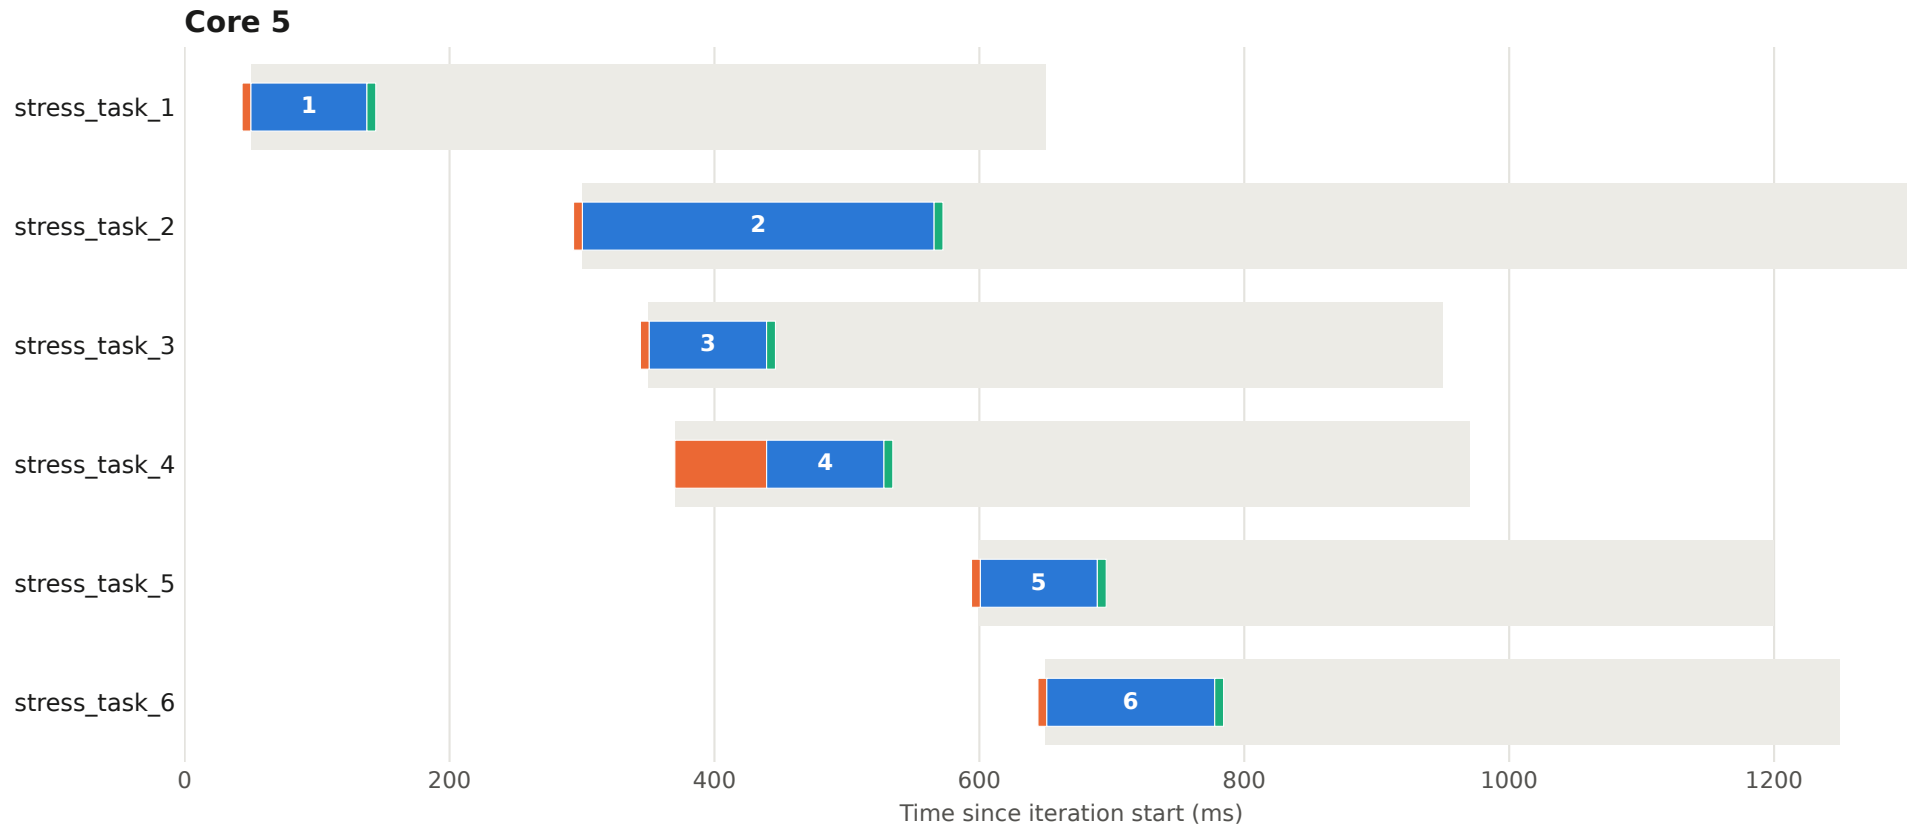


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 6 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

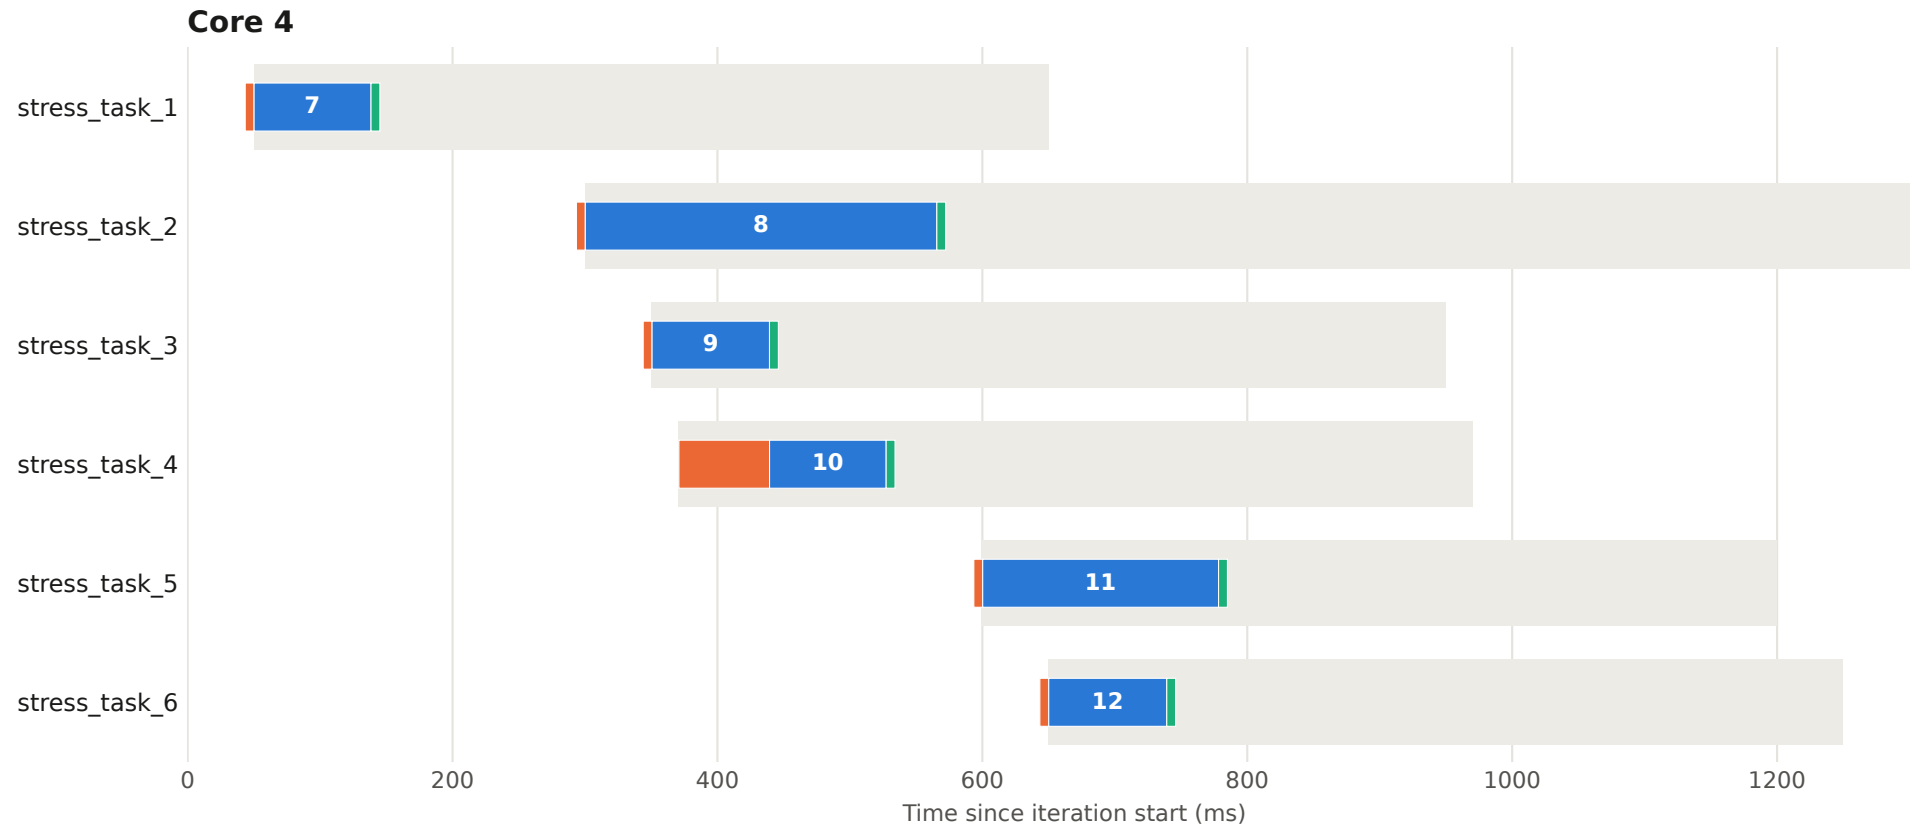


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 6 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

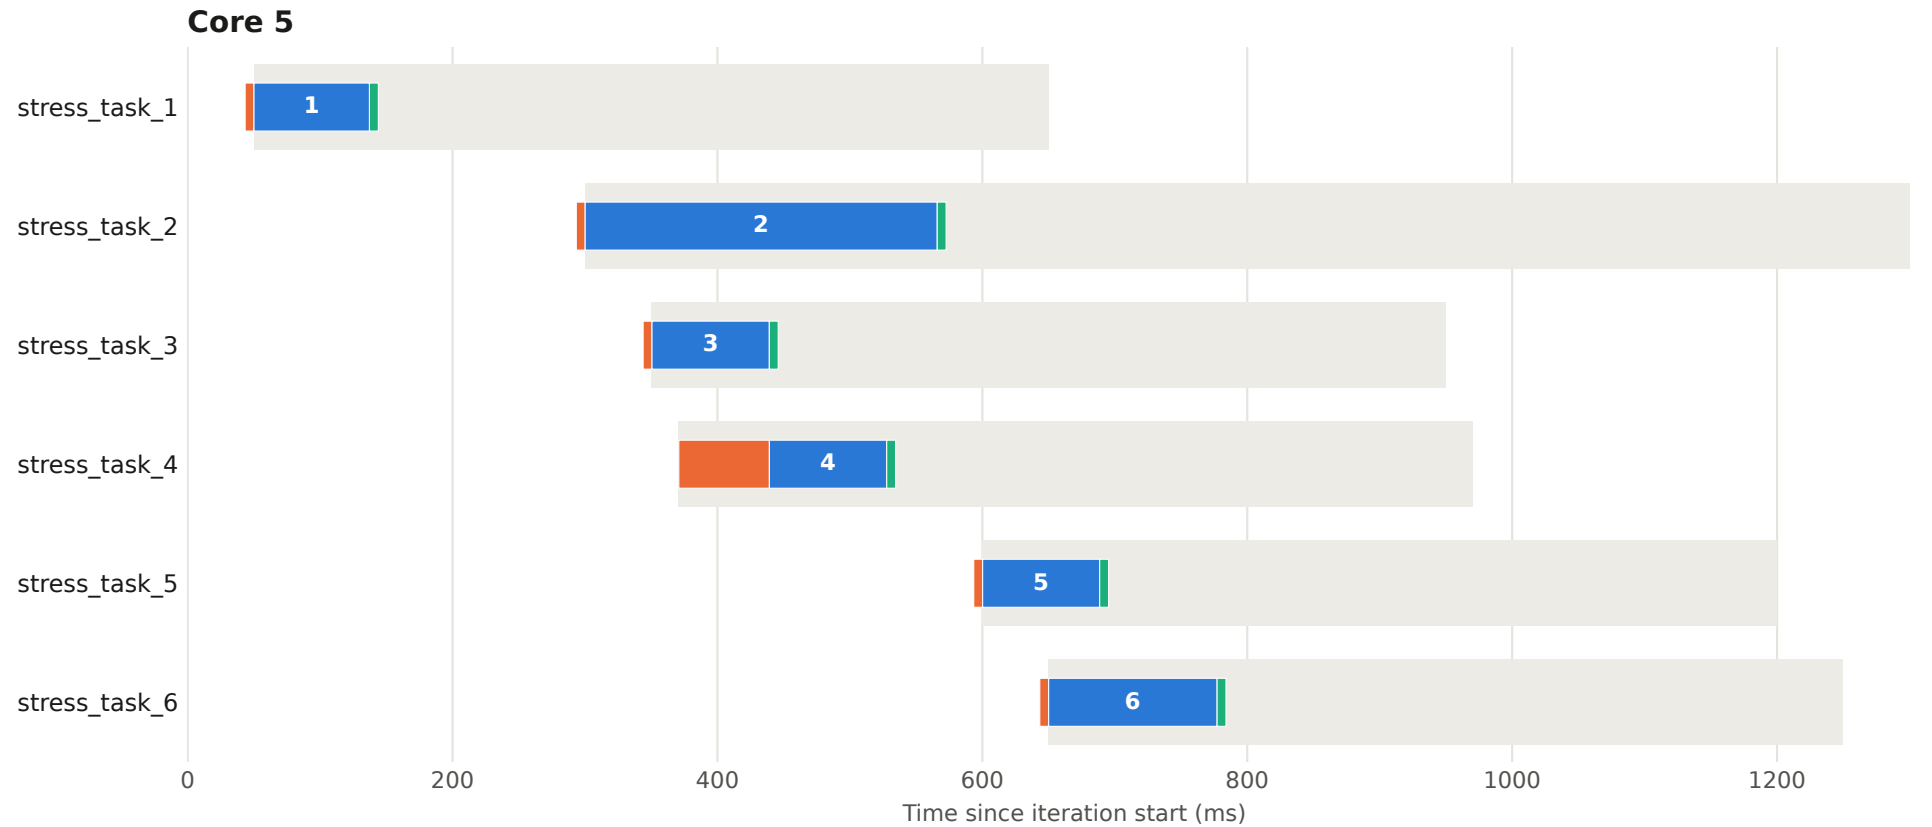


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 7 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

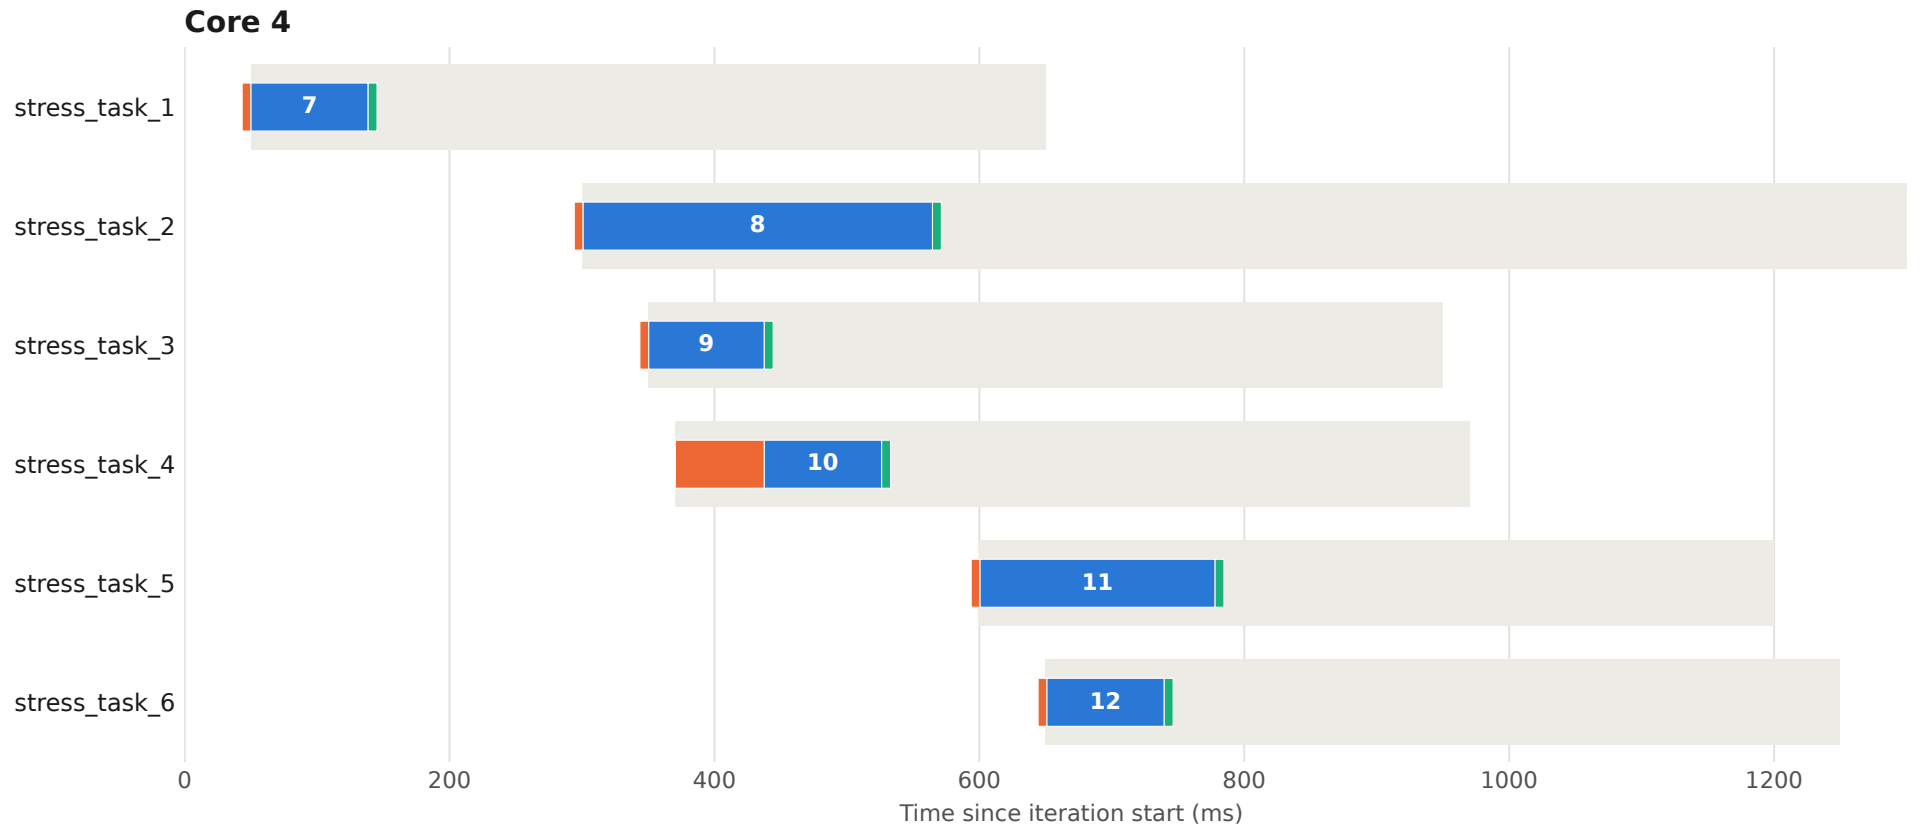


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 7 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

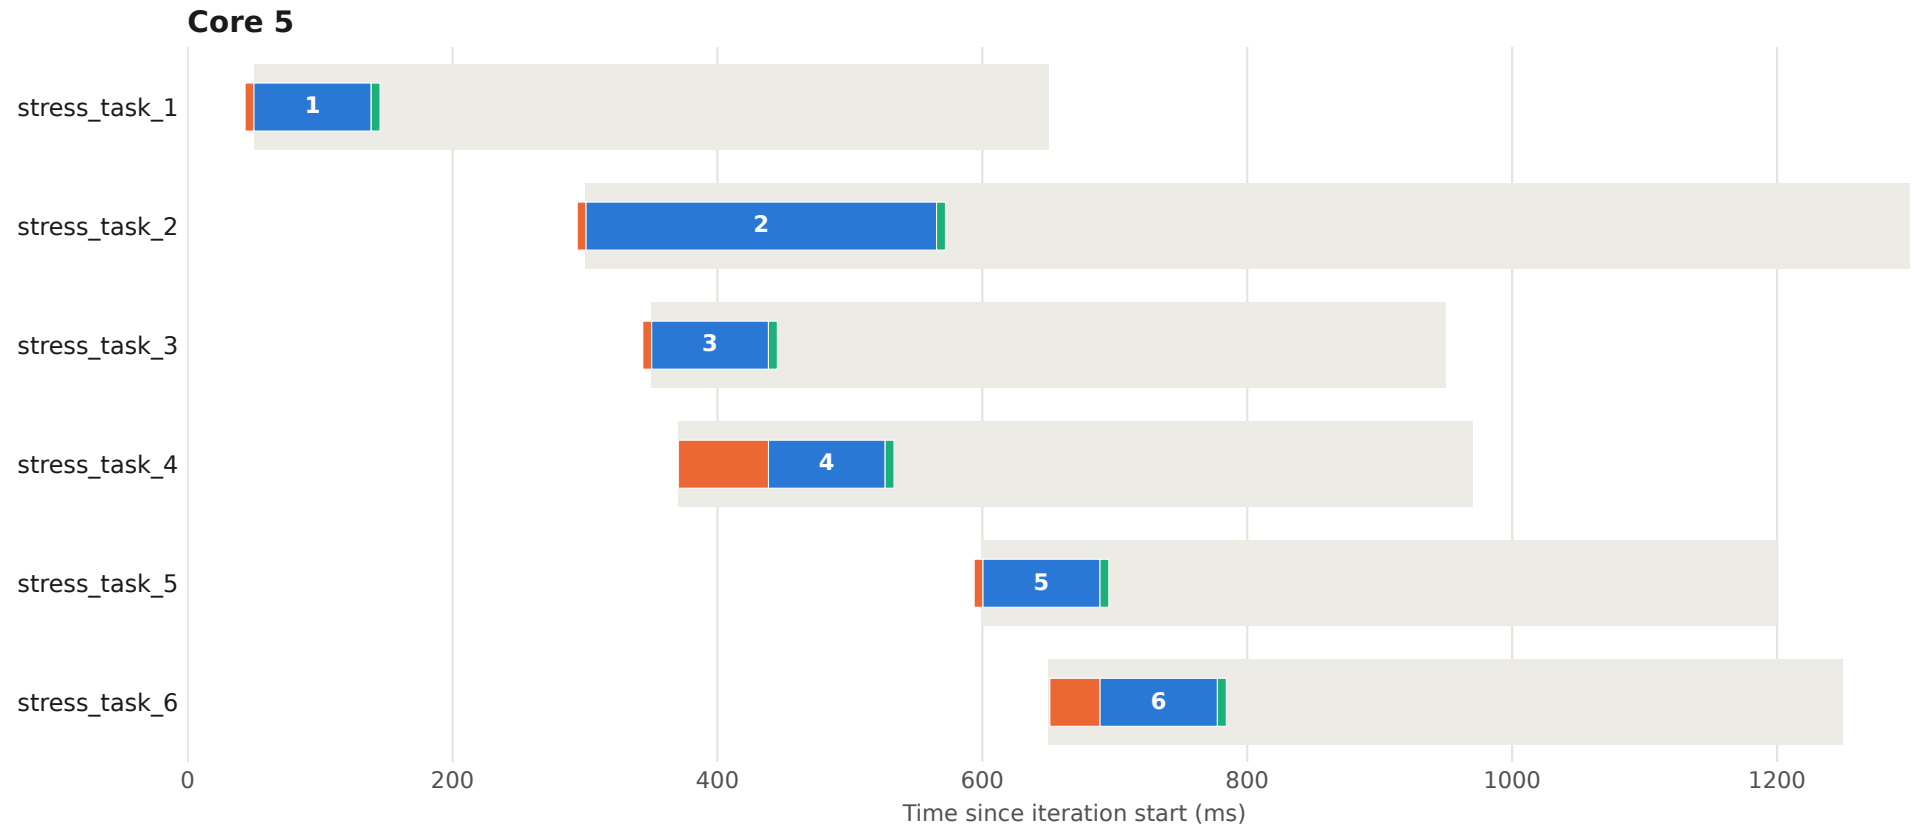


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 8 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

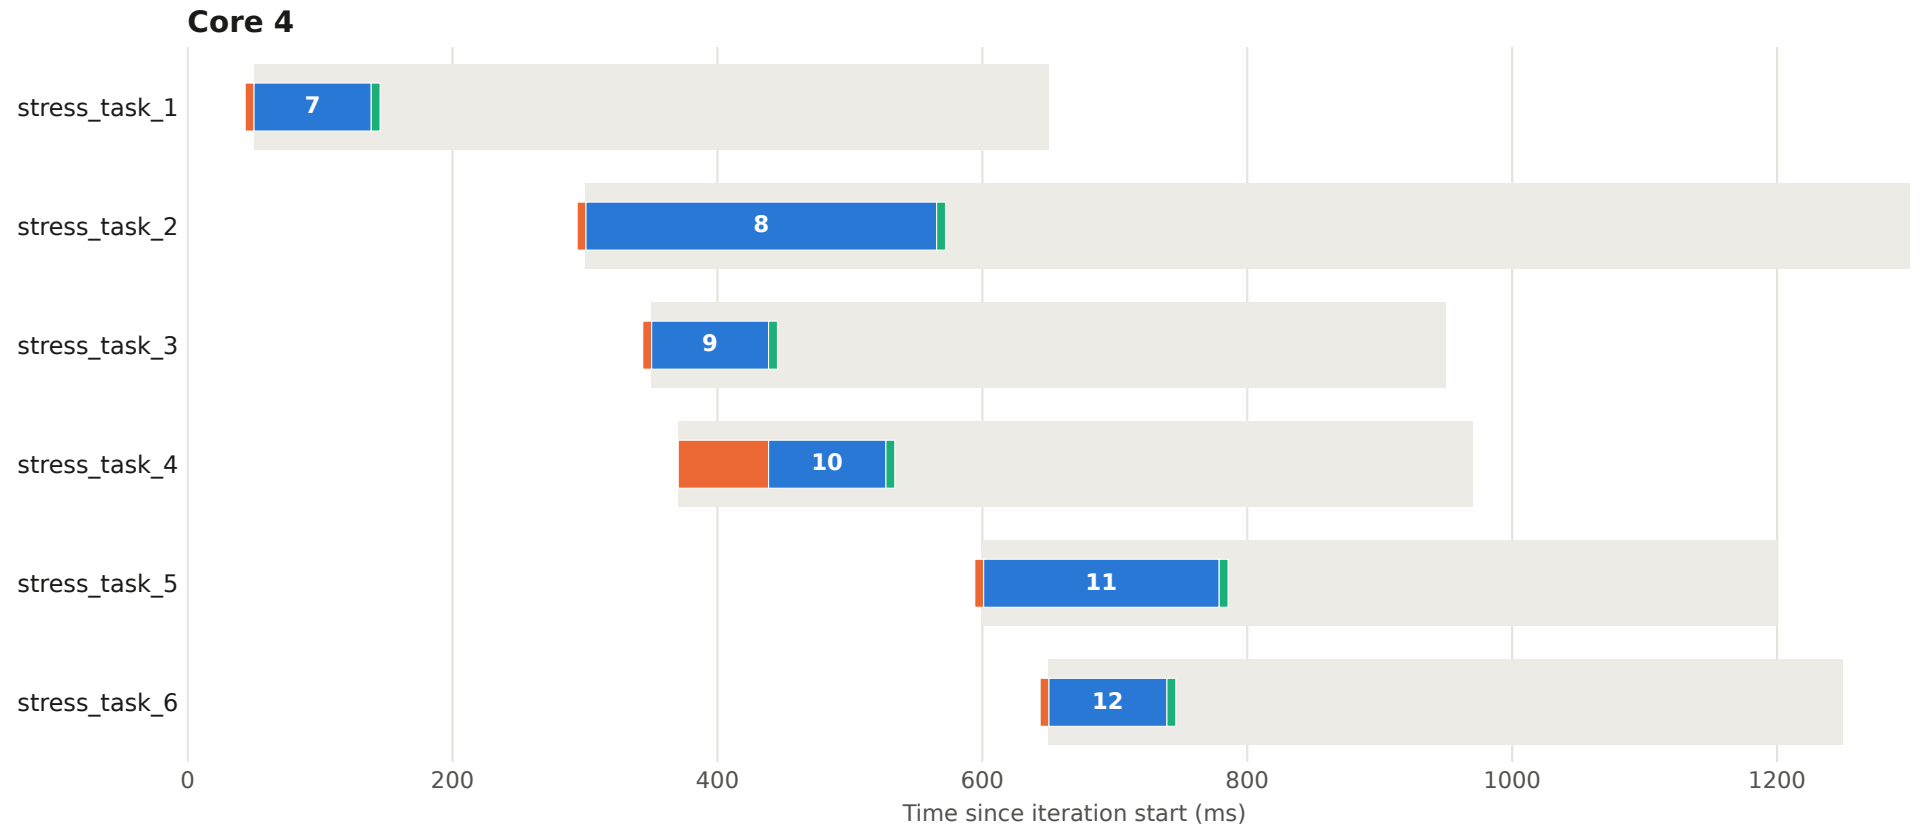


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 8 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

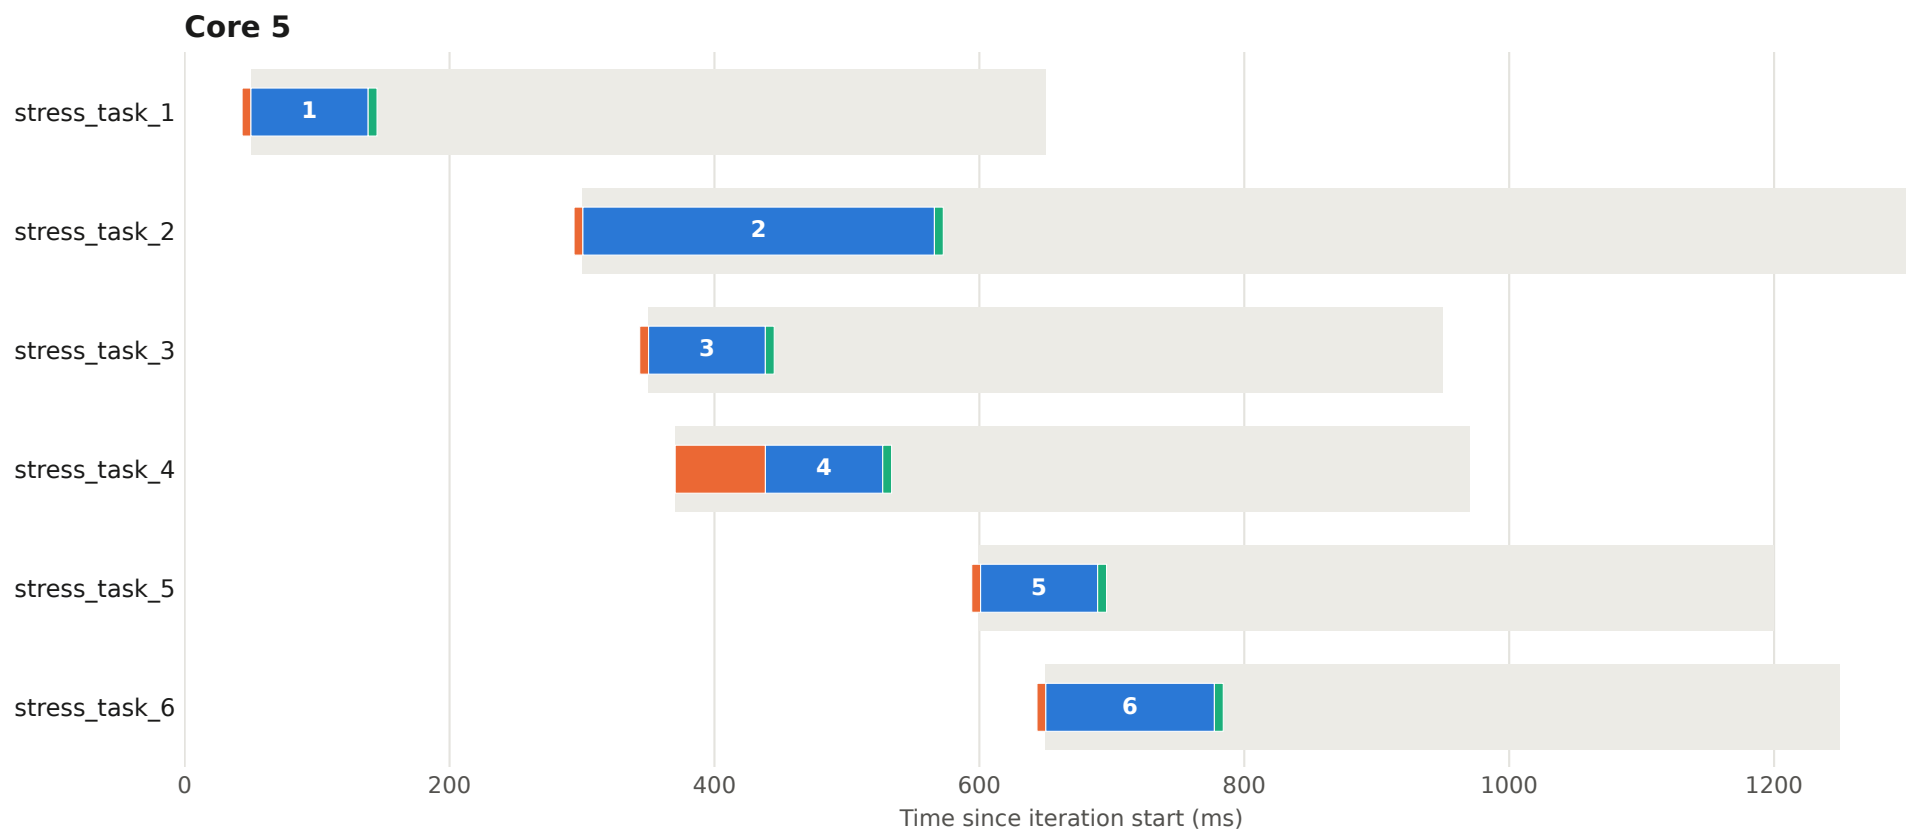


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 9 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

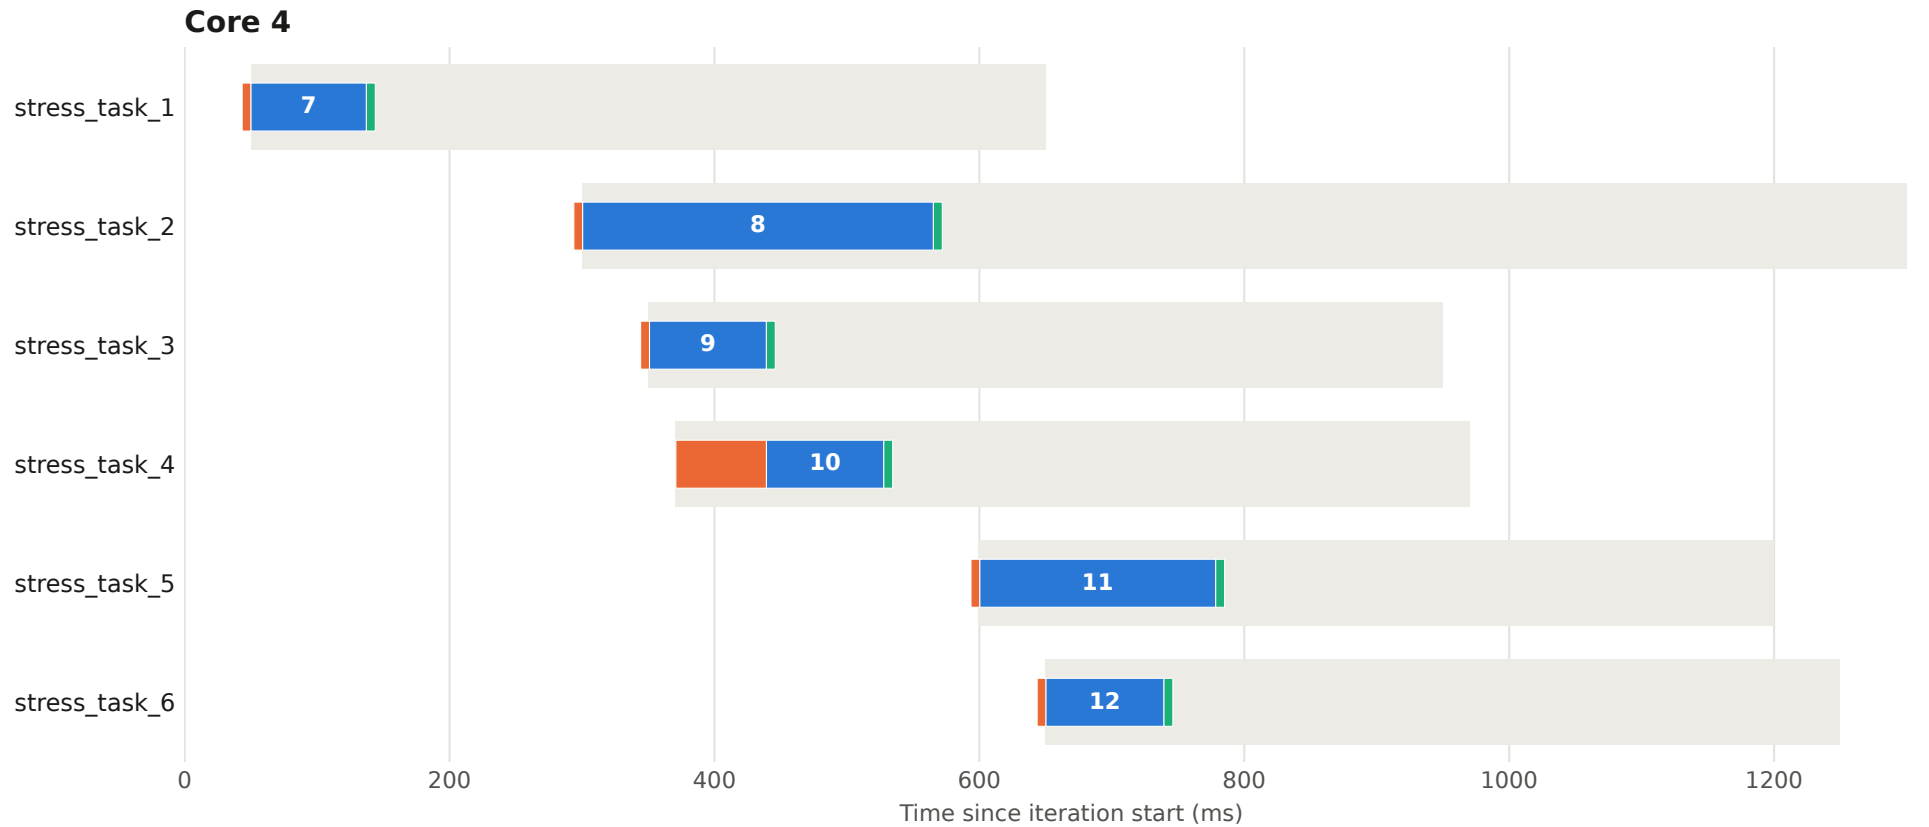


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 9 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

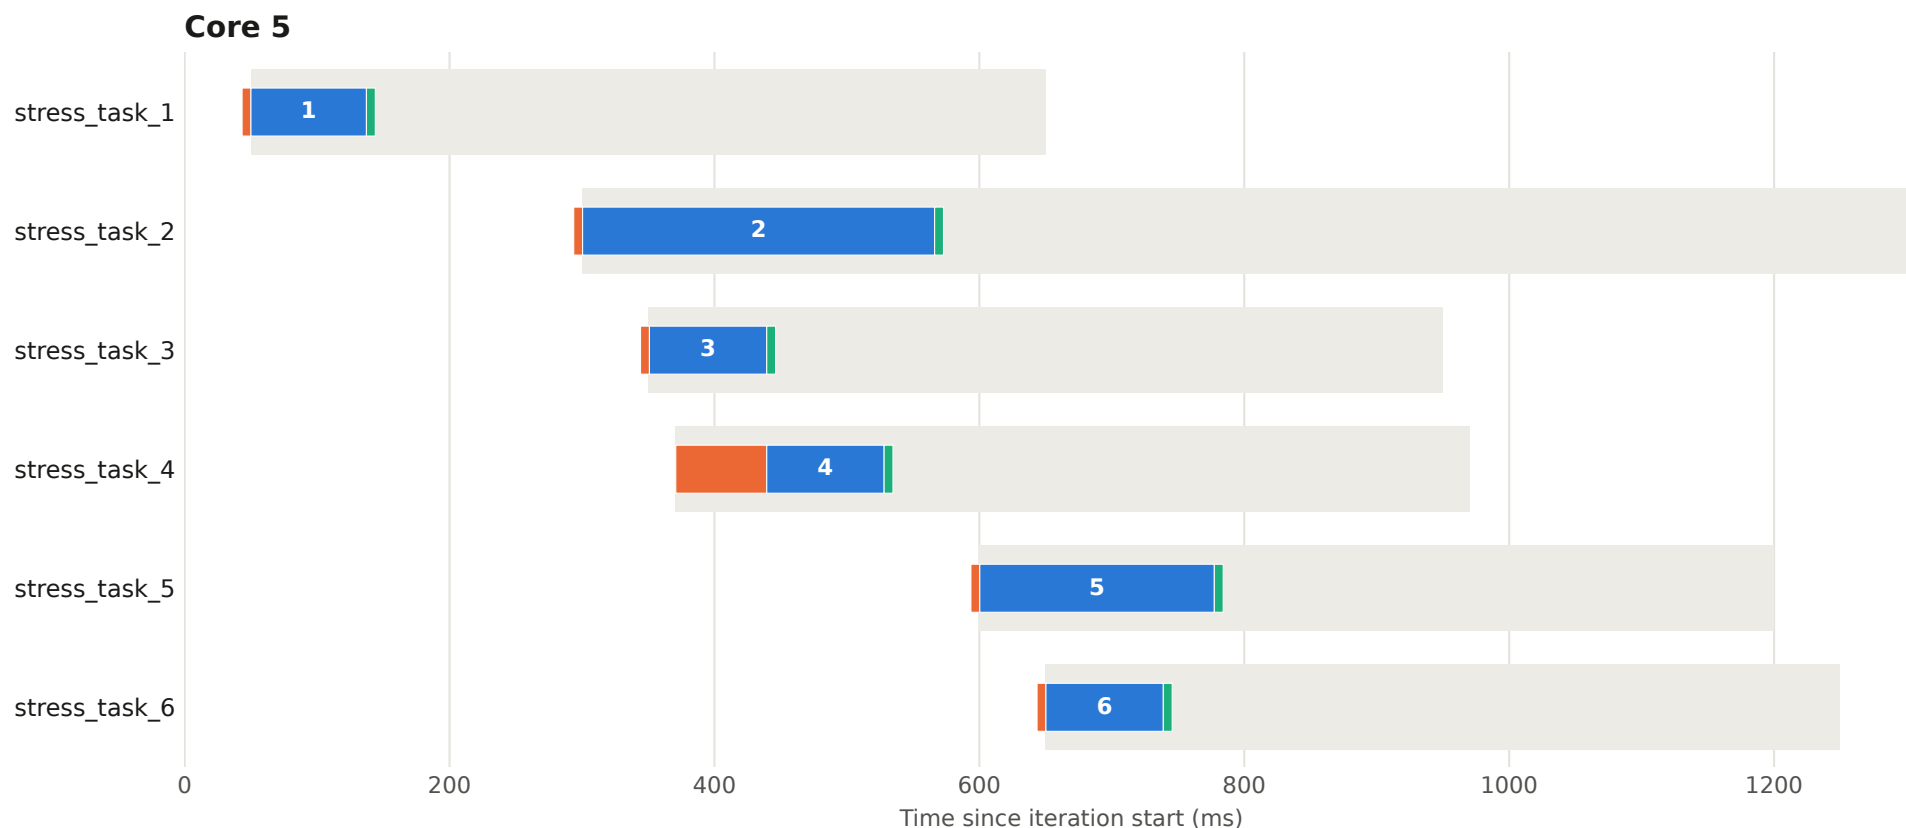


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 10 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

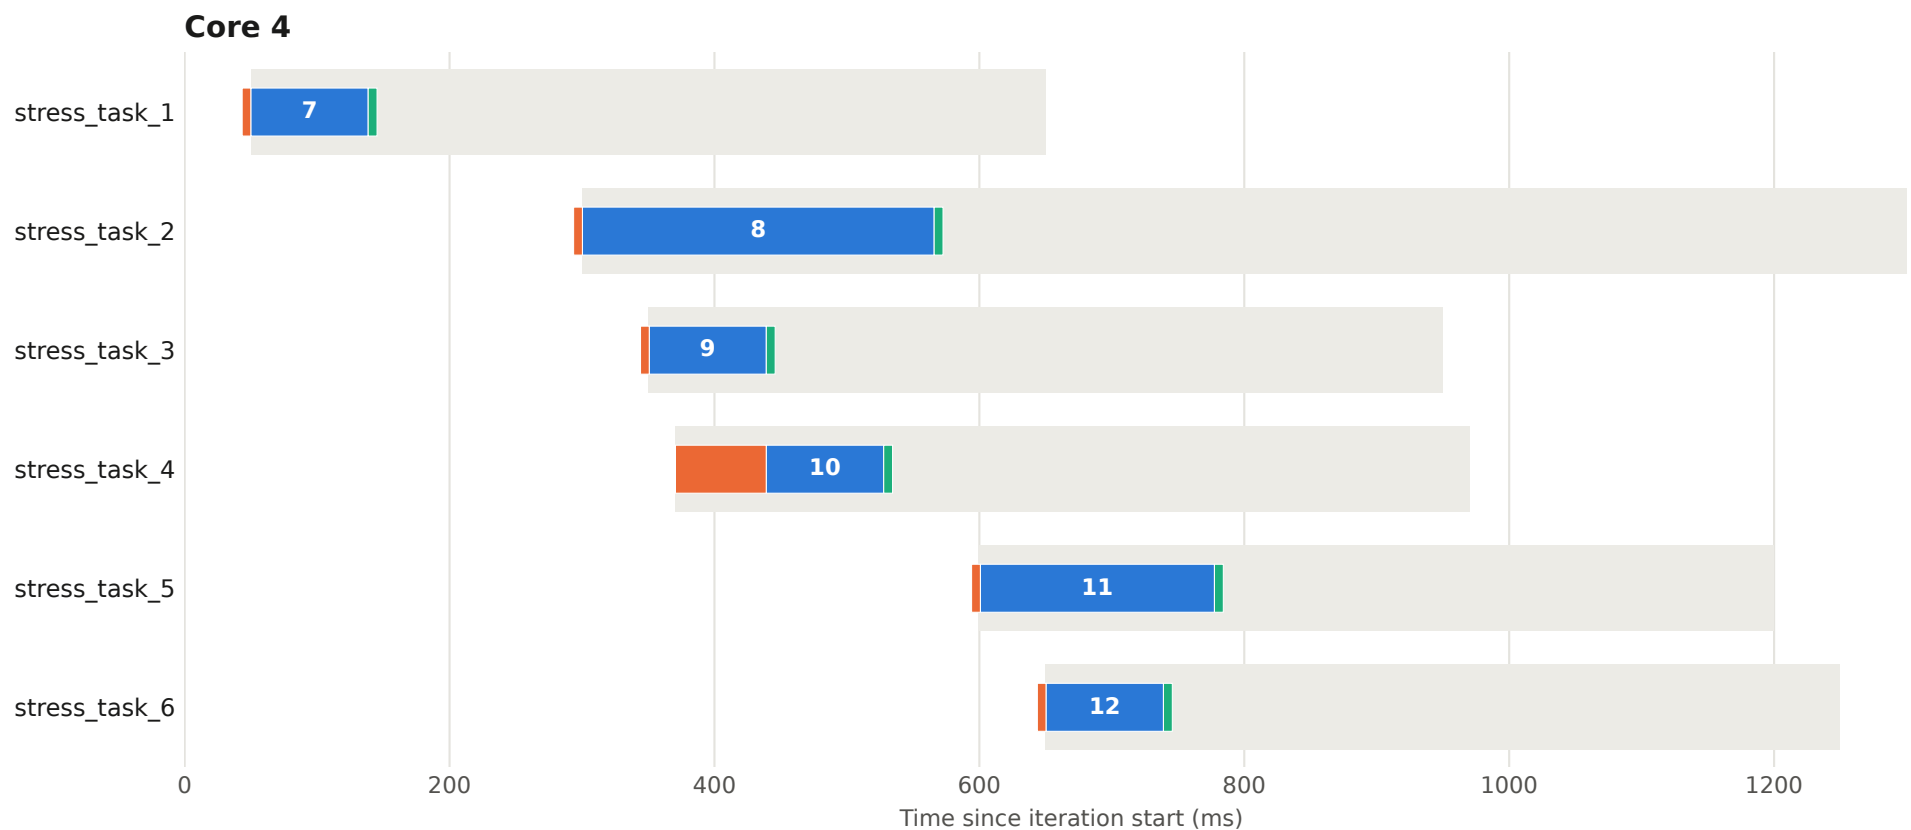


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 10 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

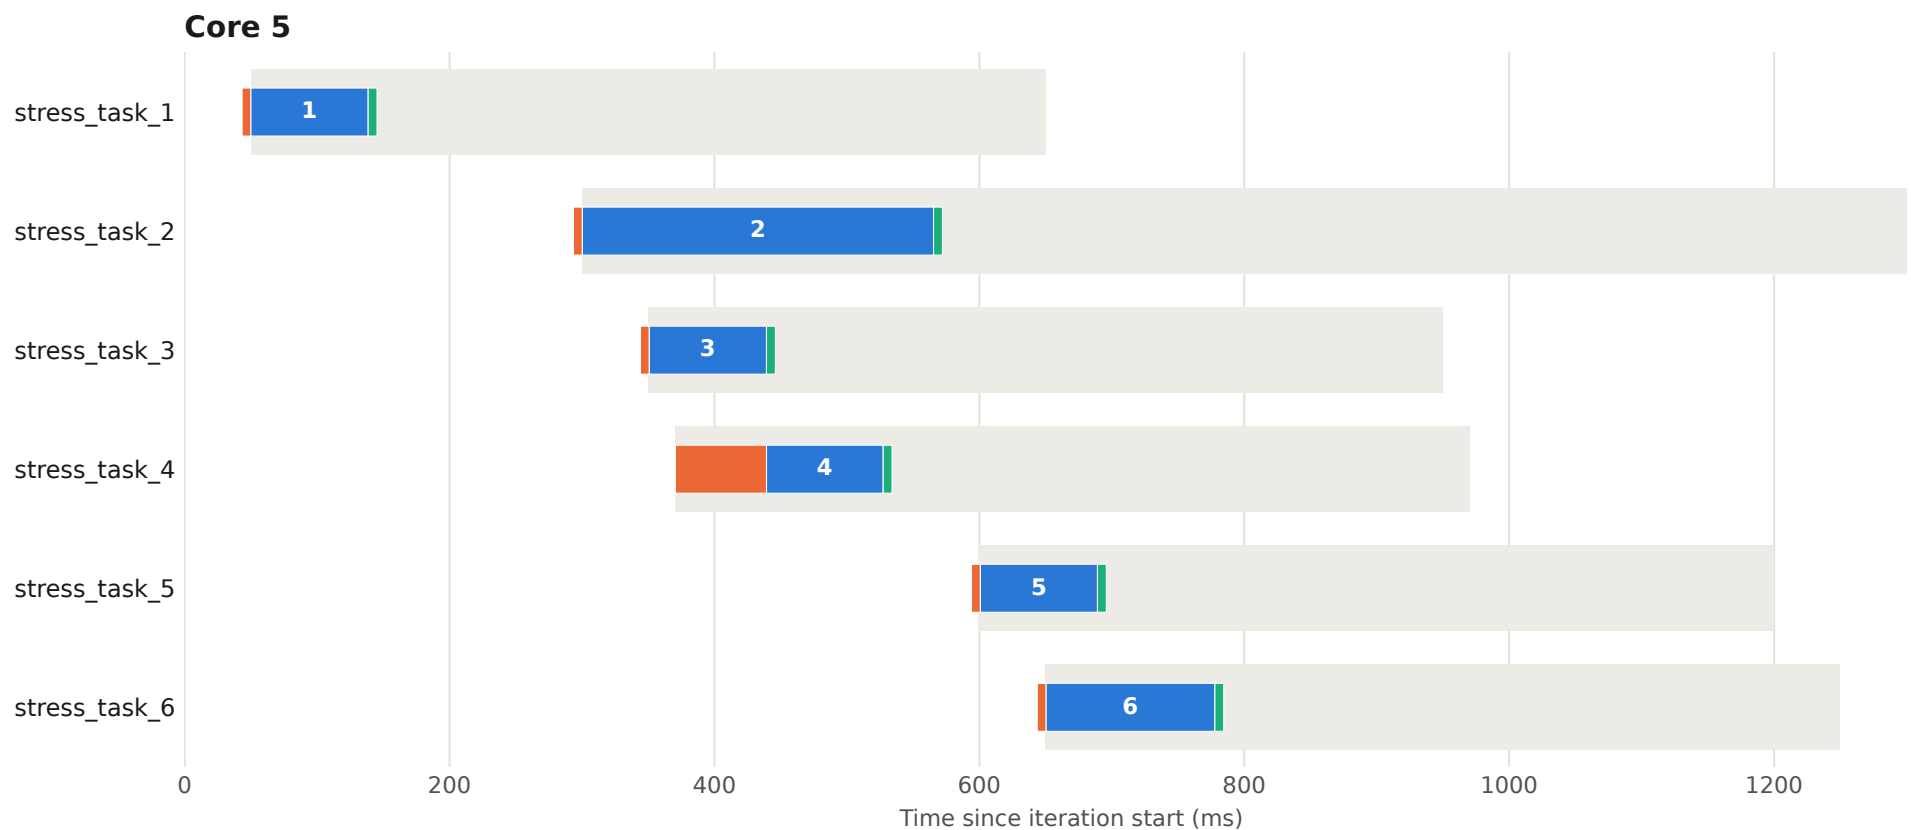


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 11 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

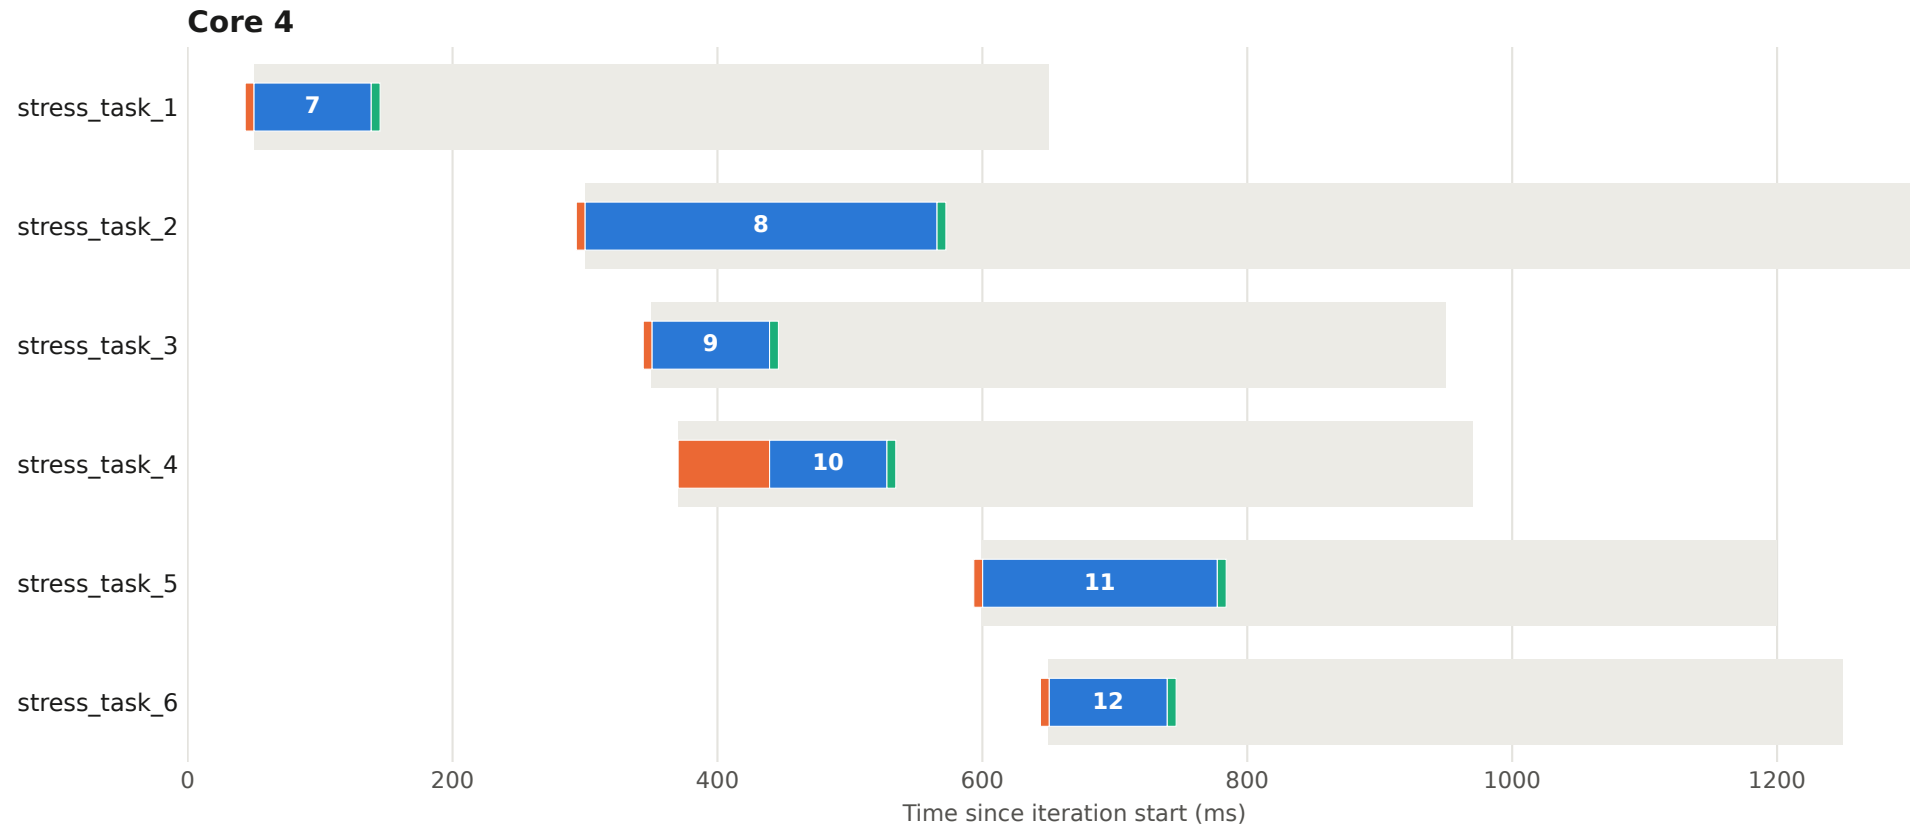


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 11 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

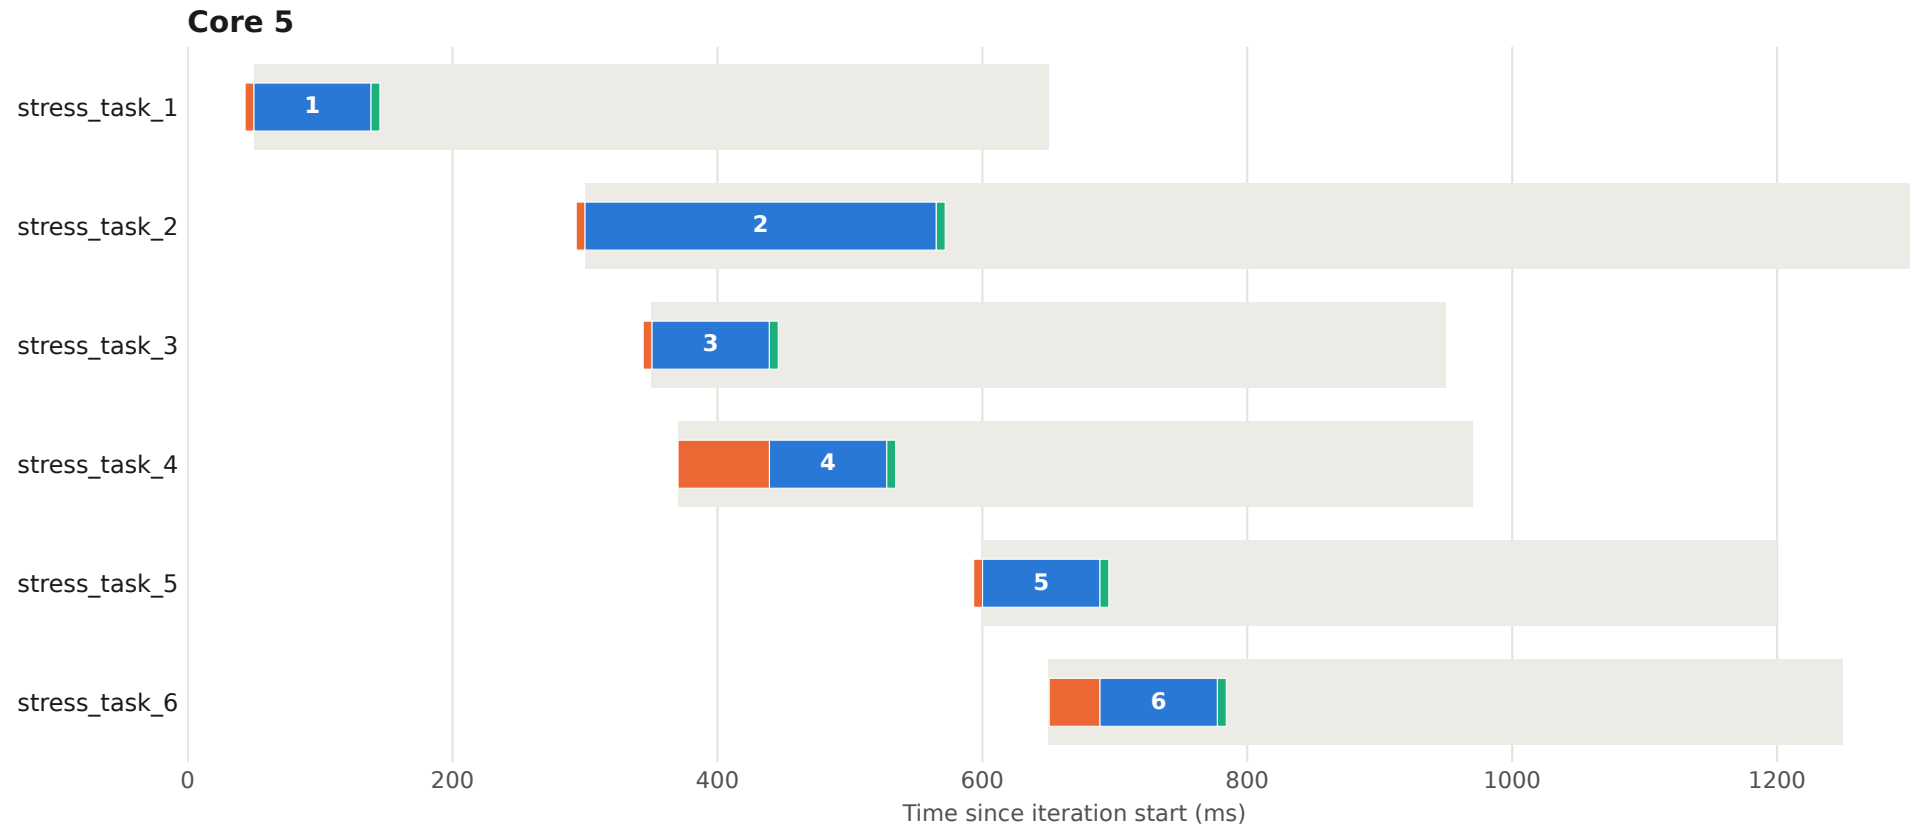


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 12 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

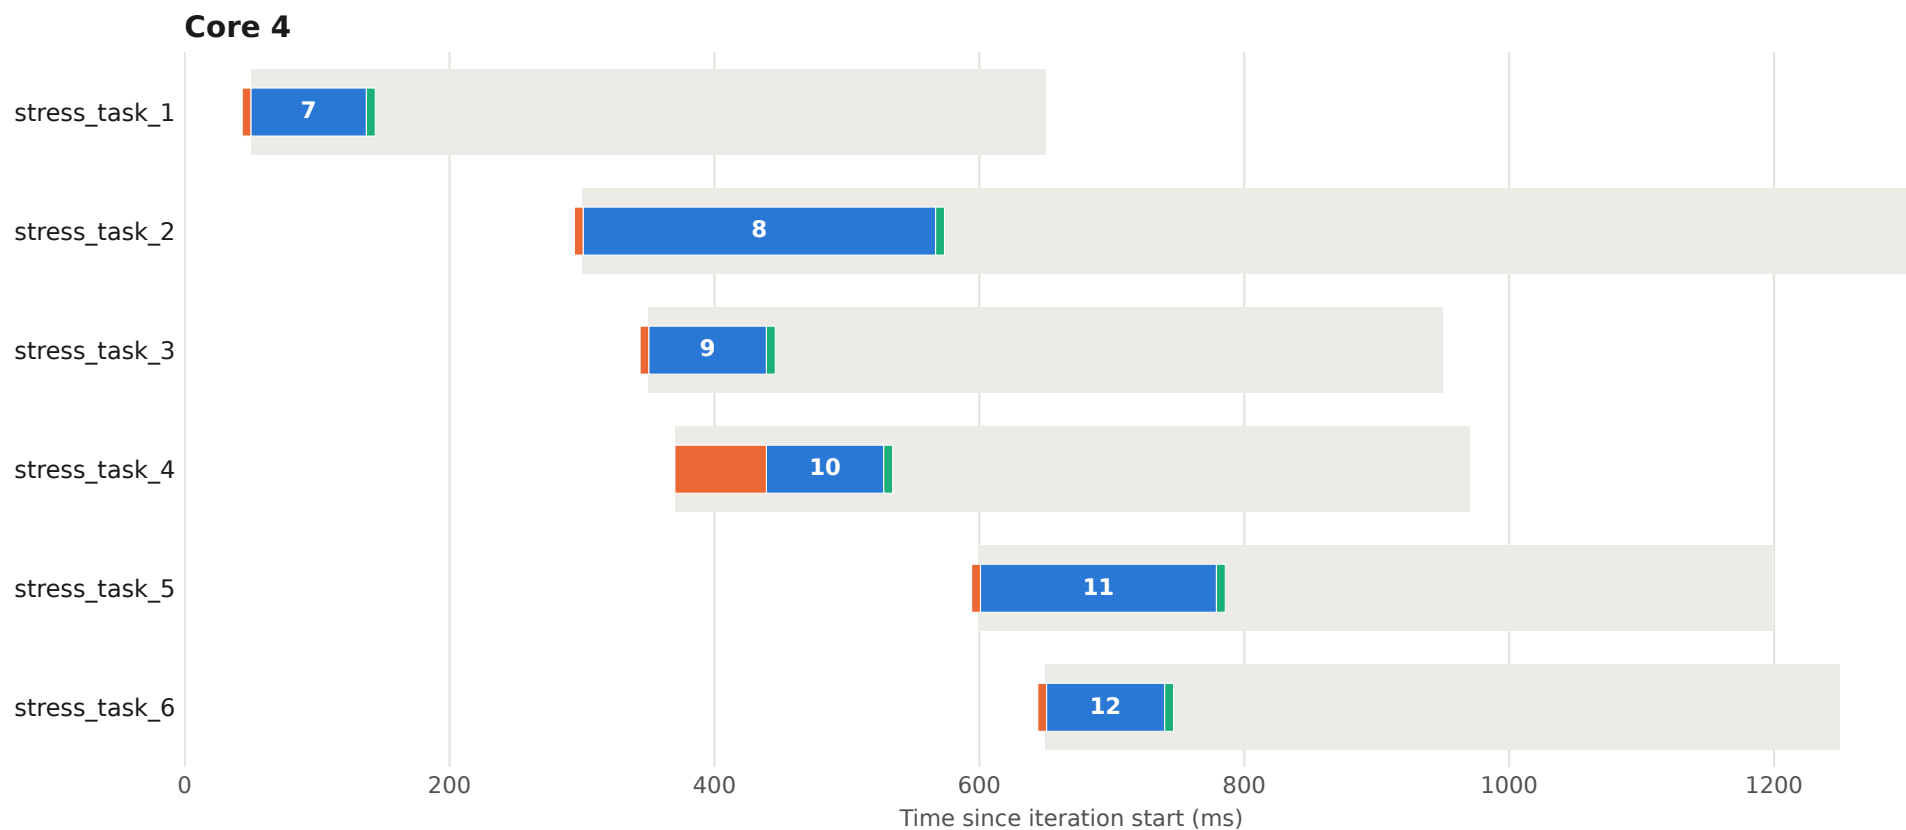


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 12 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

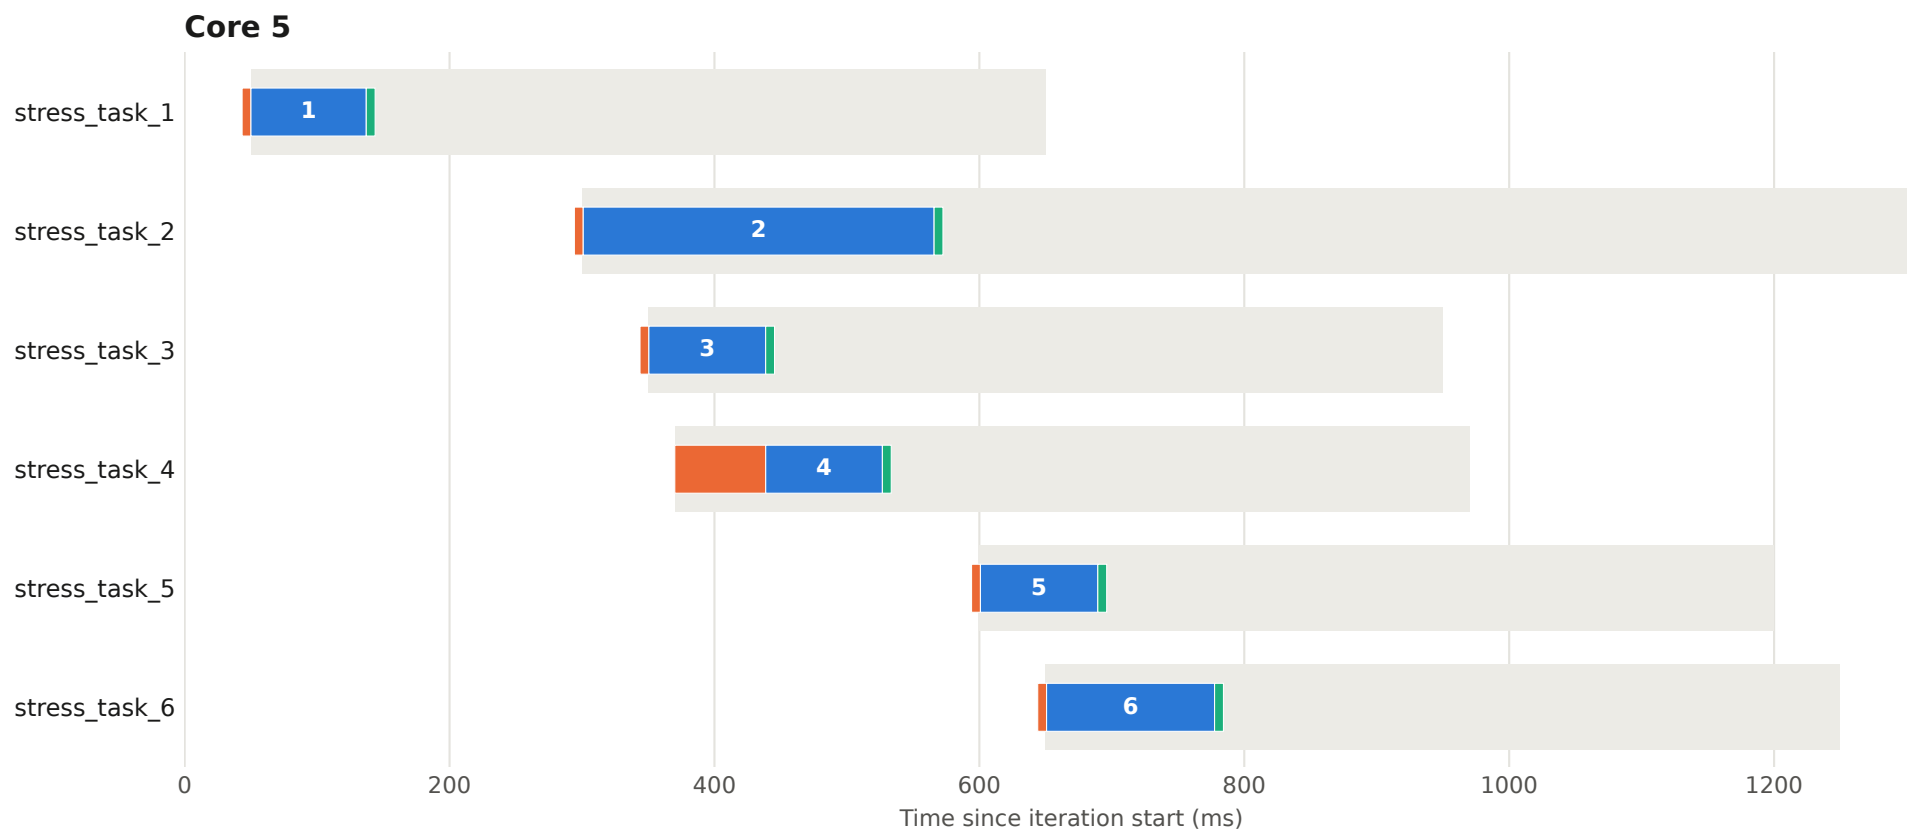


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 13 - core 4

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

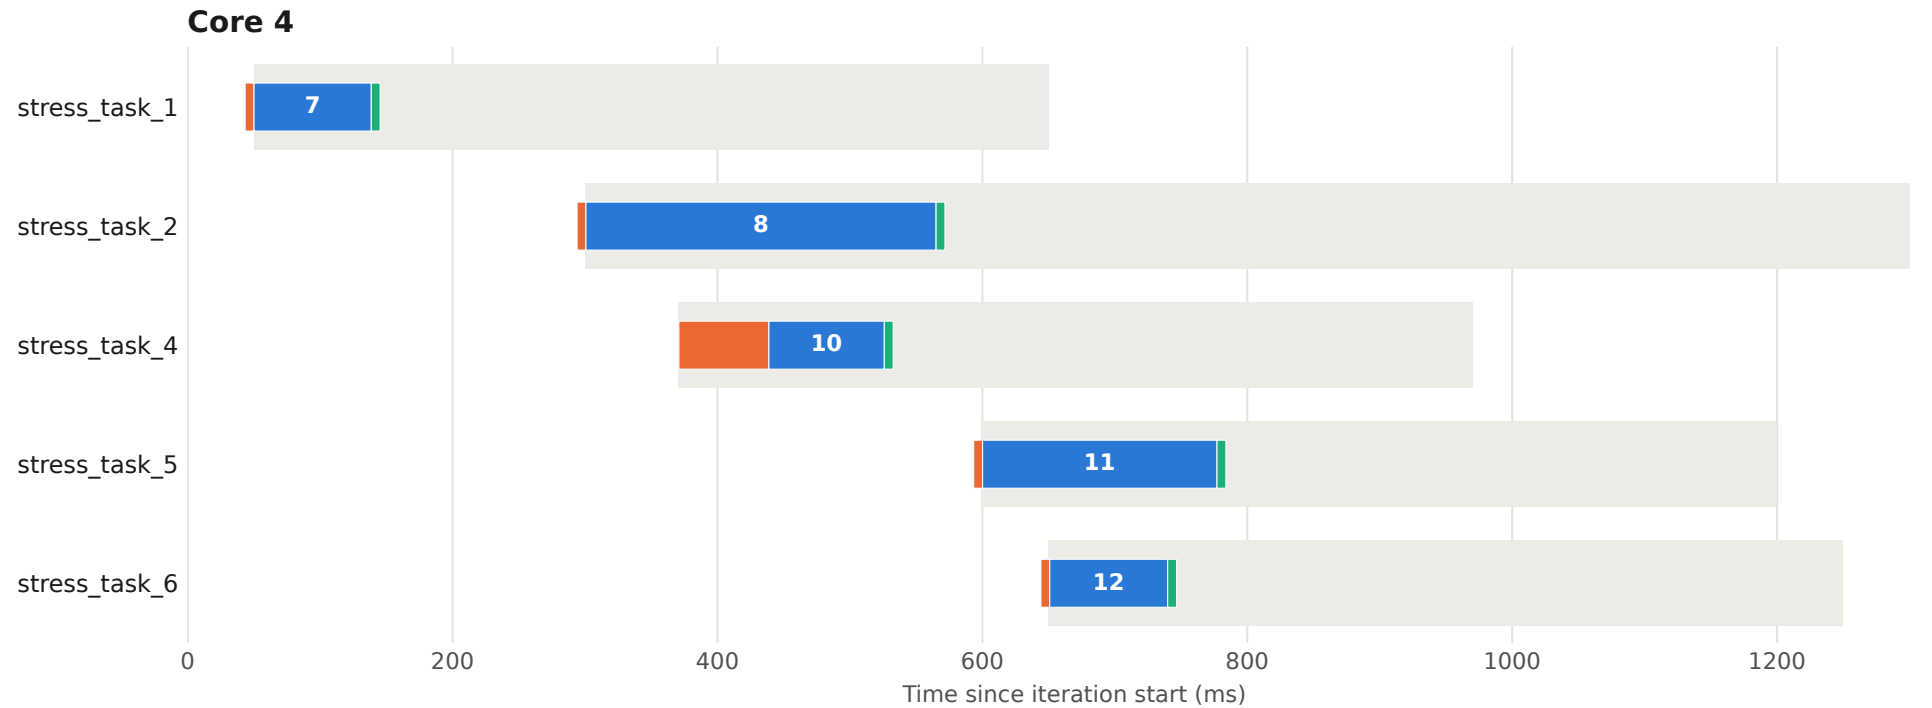

Execution plan - iteration 13 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

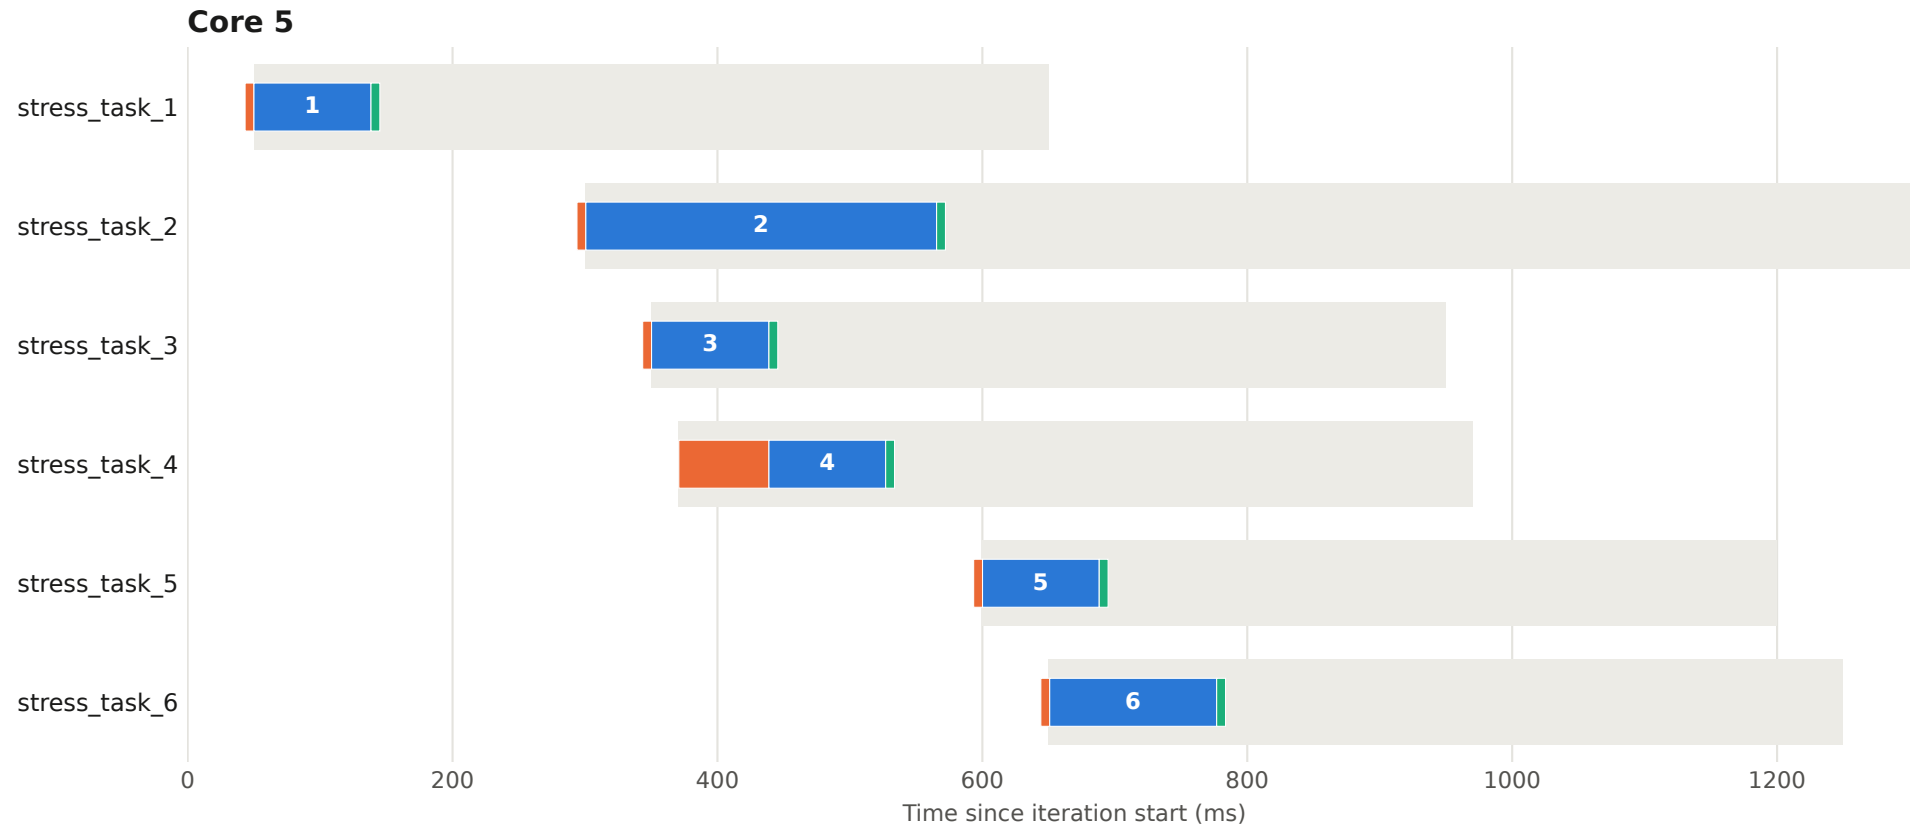


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 14 - core 4

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

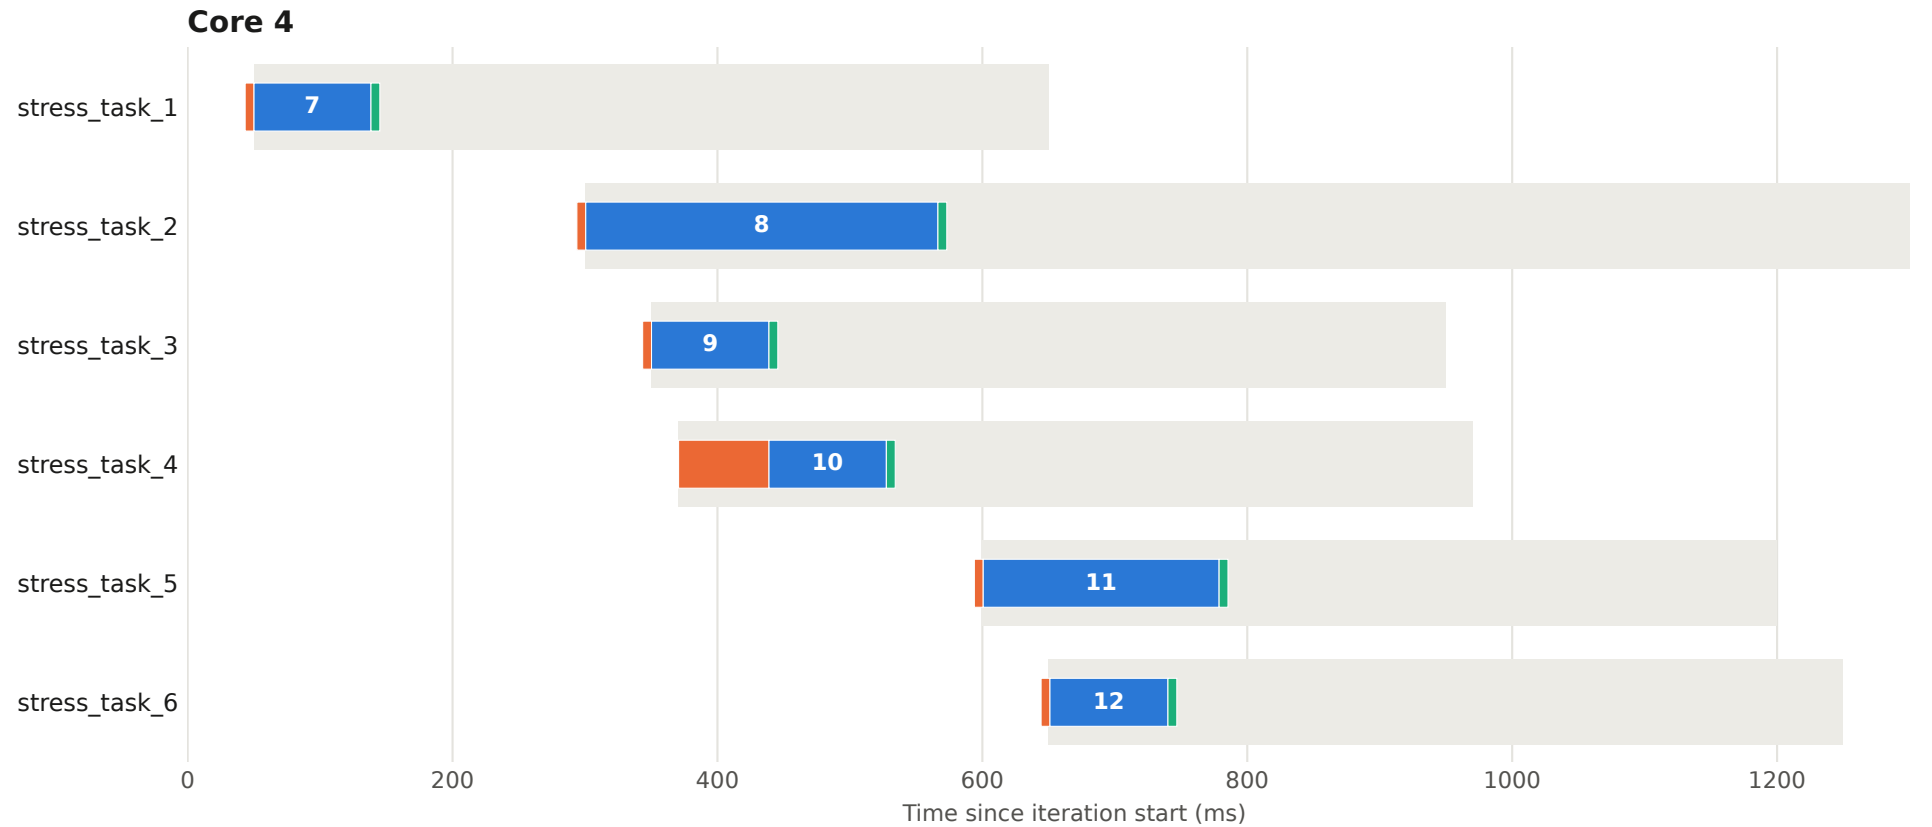

Execution plan - iteration 14 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

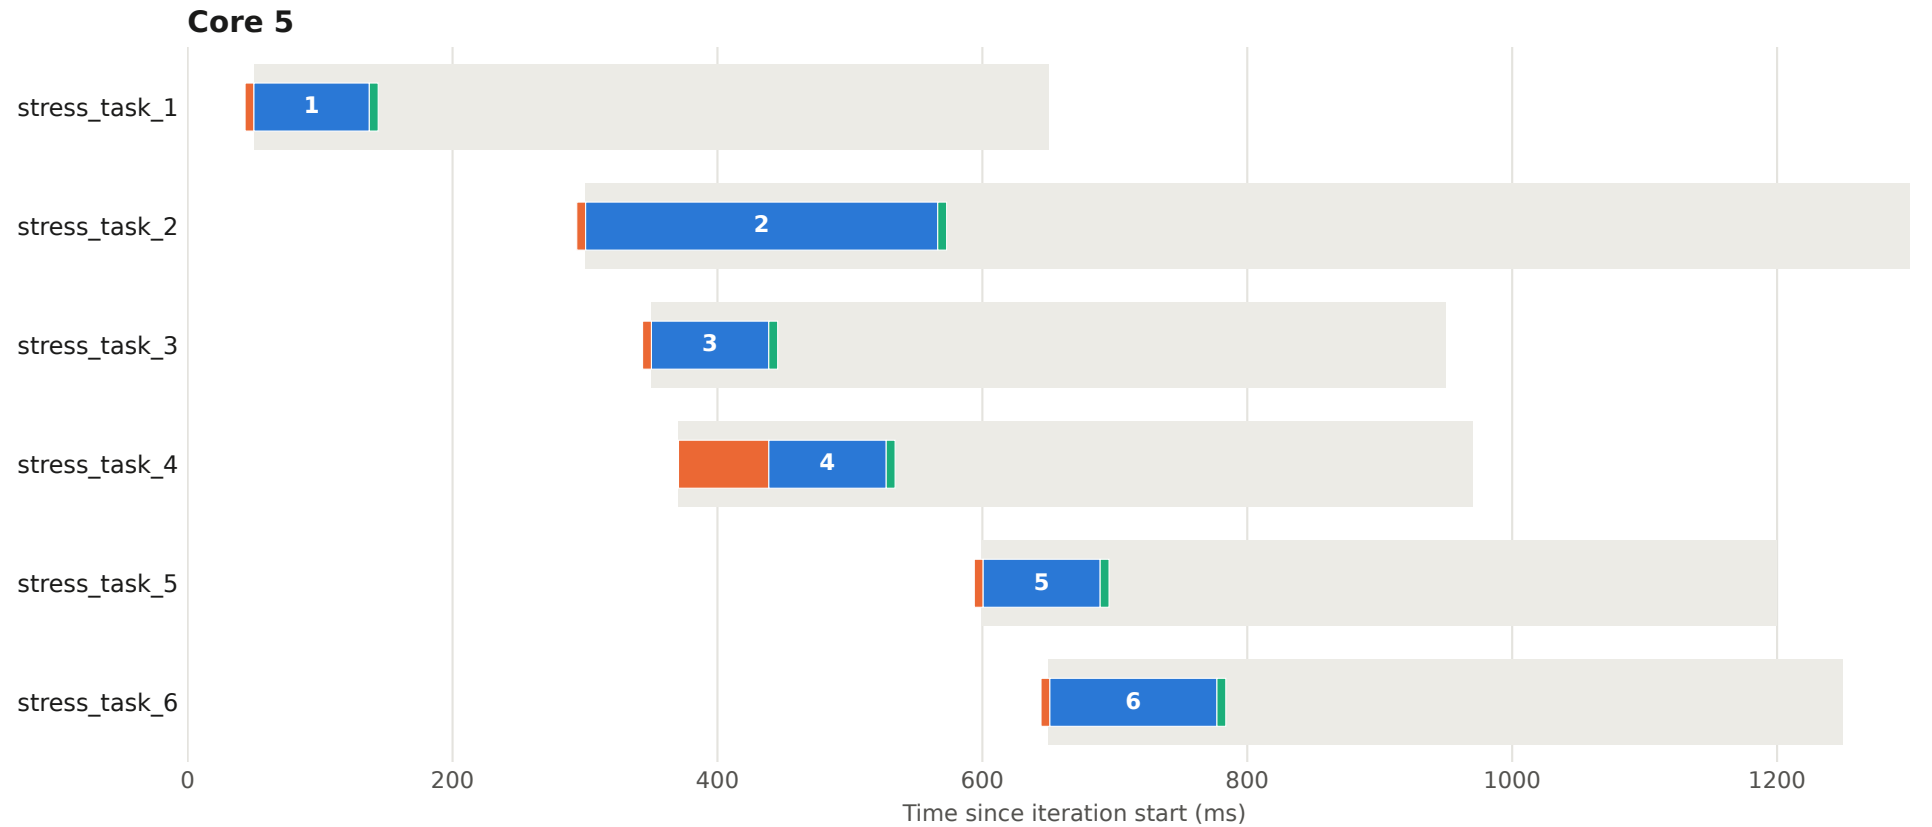


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 15 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

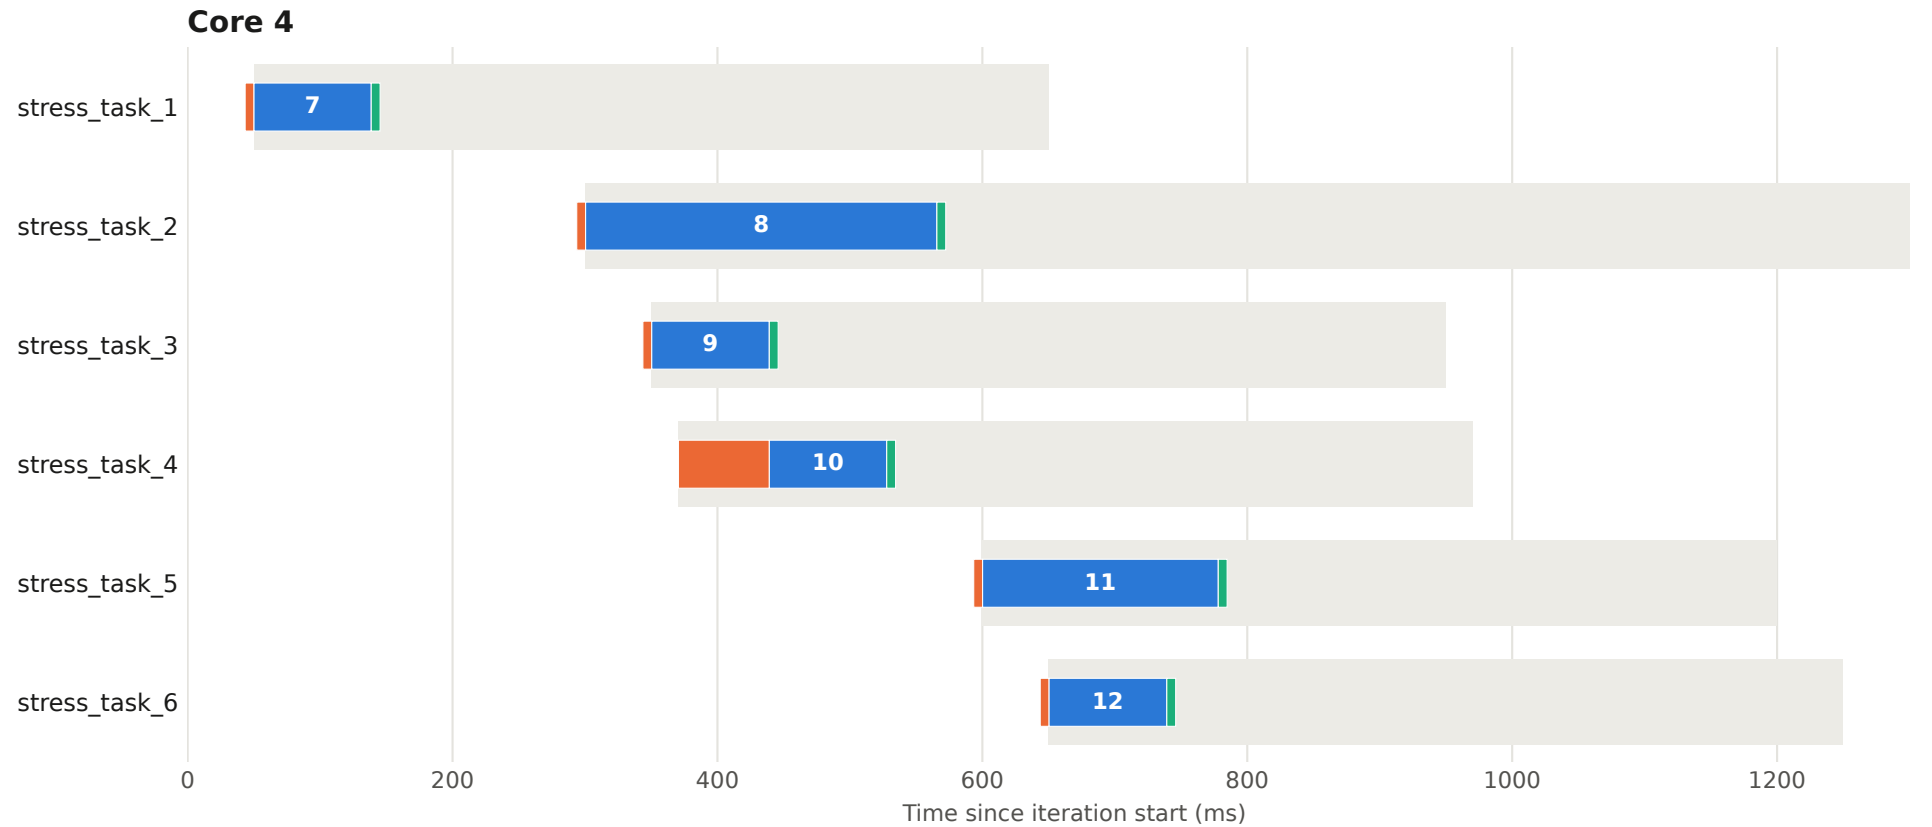


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 15 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

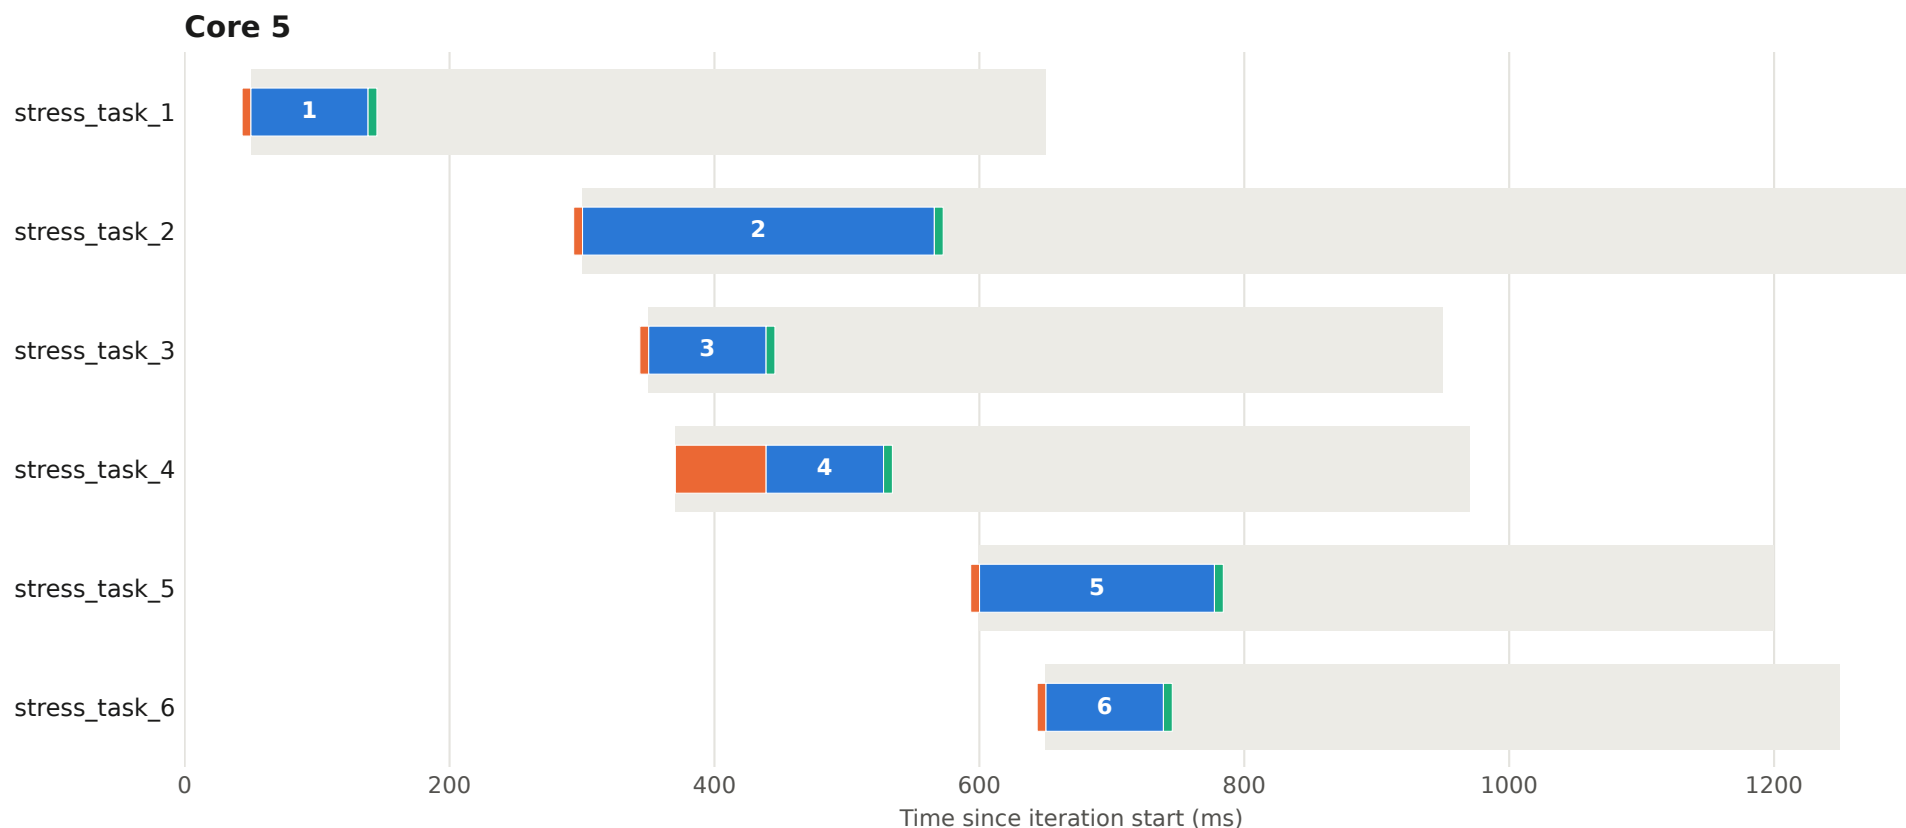


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 16 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

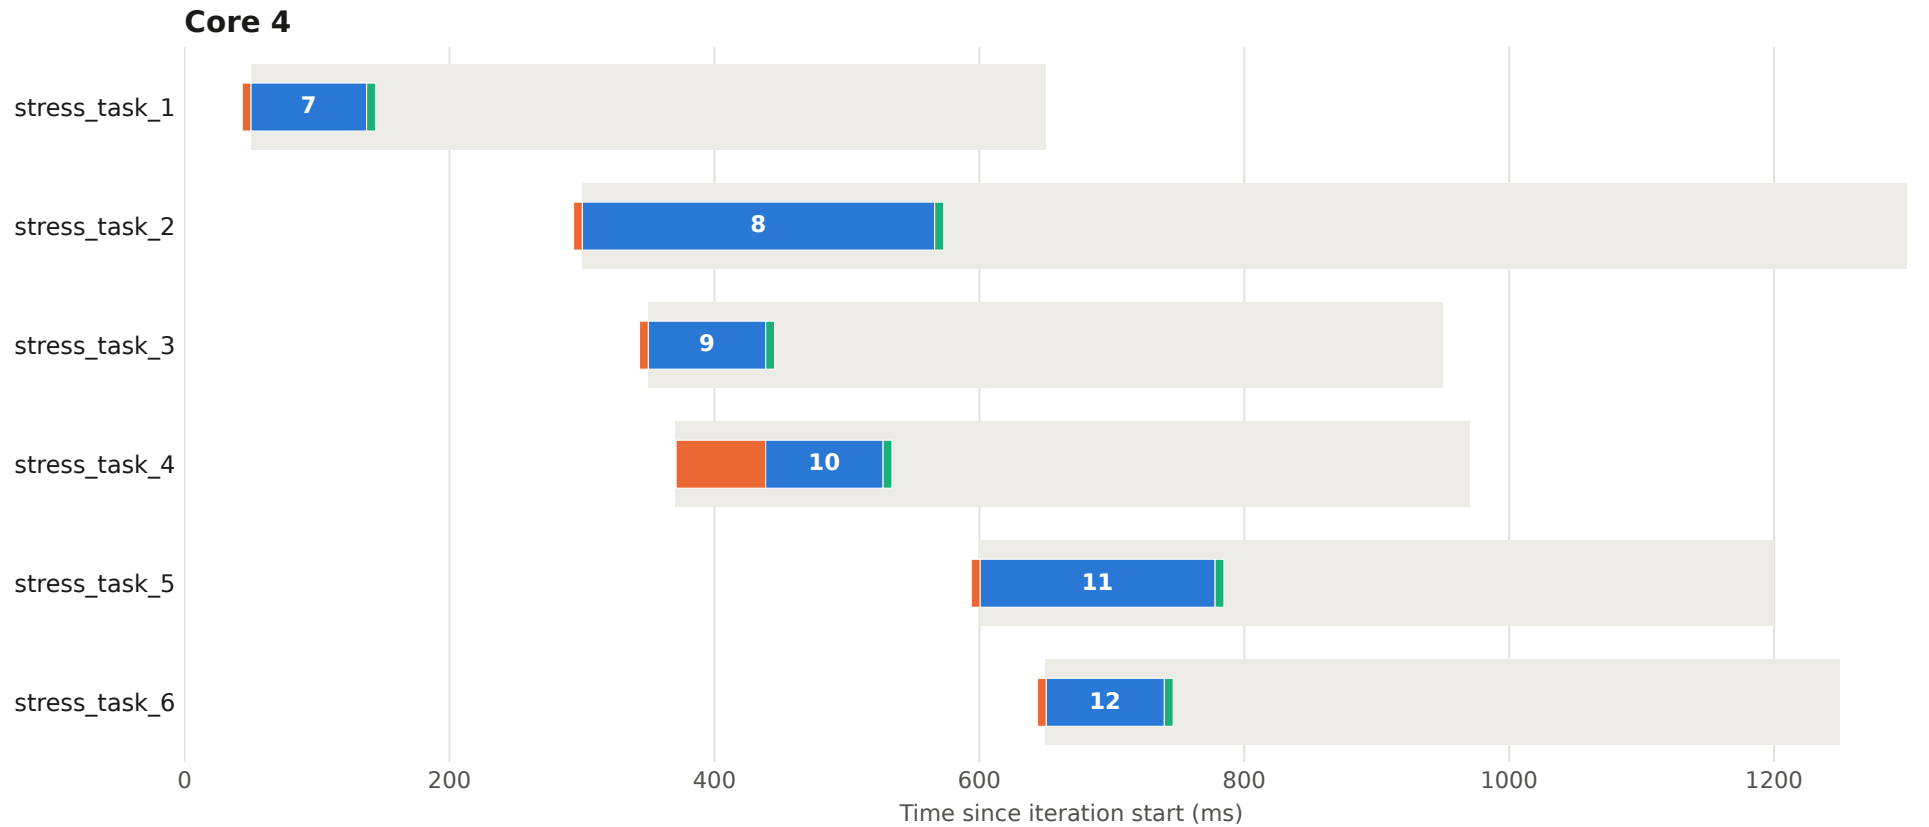


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 16 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

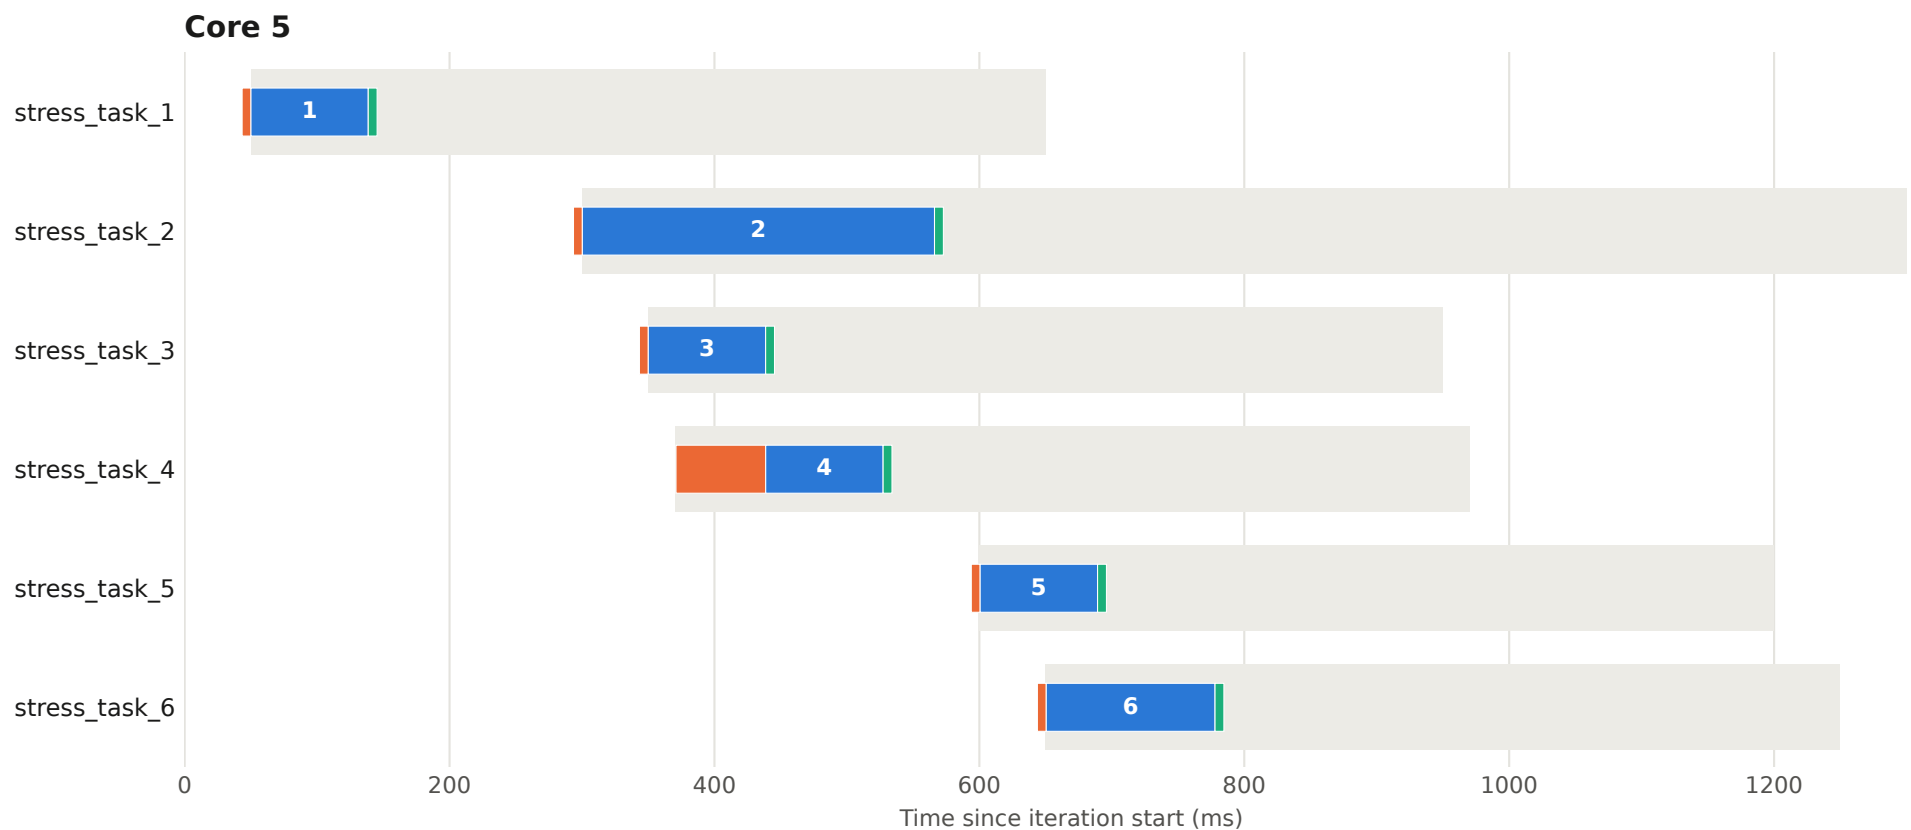


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 17 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

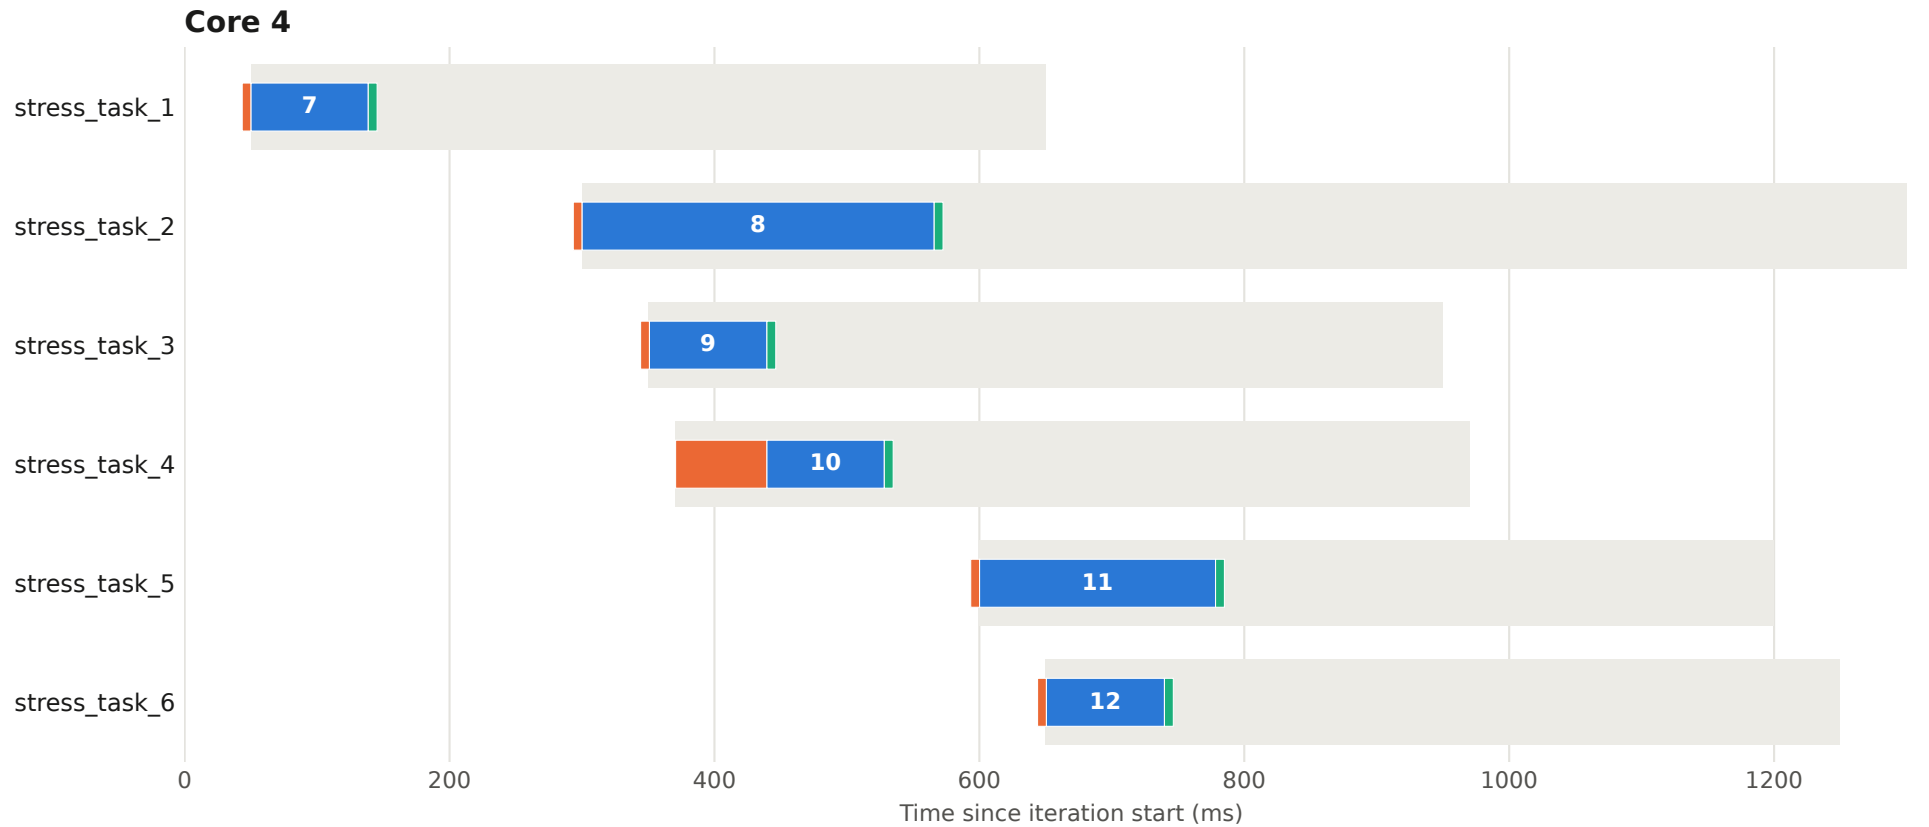


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 17 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

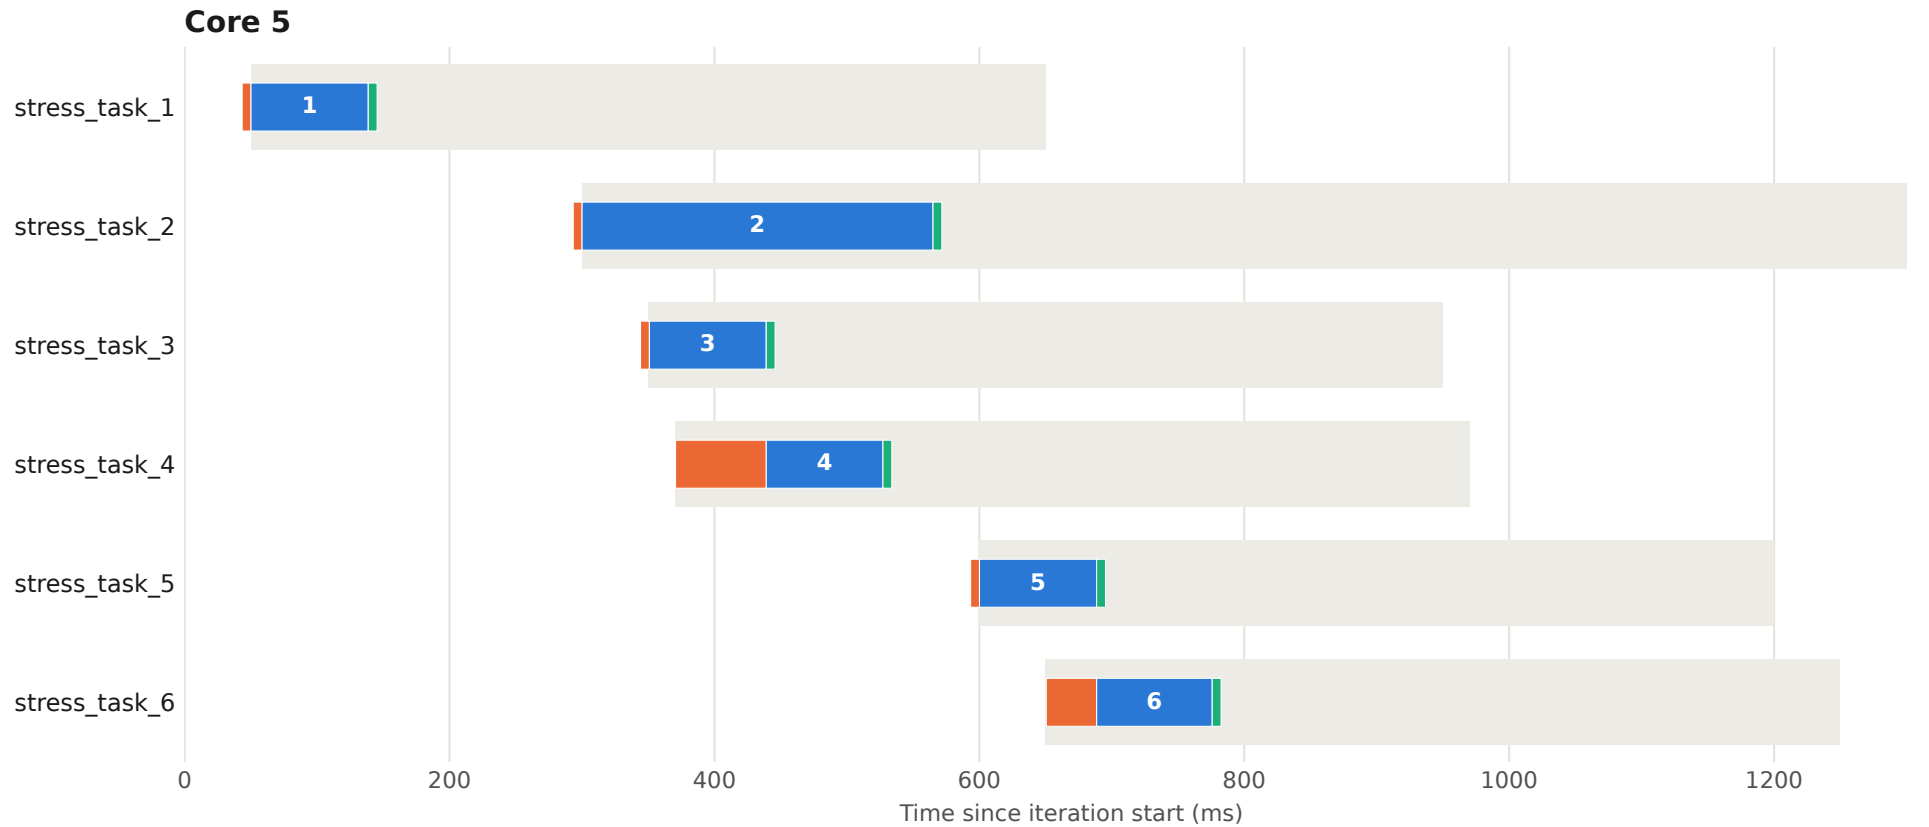


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 18 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

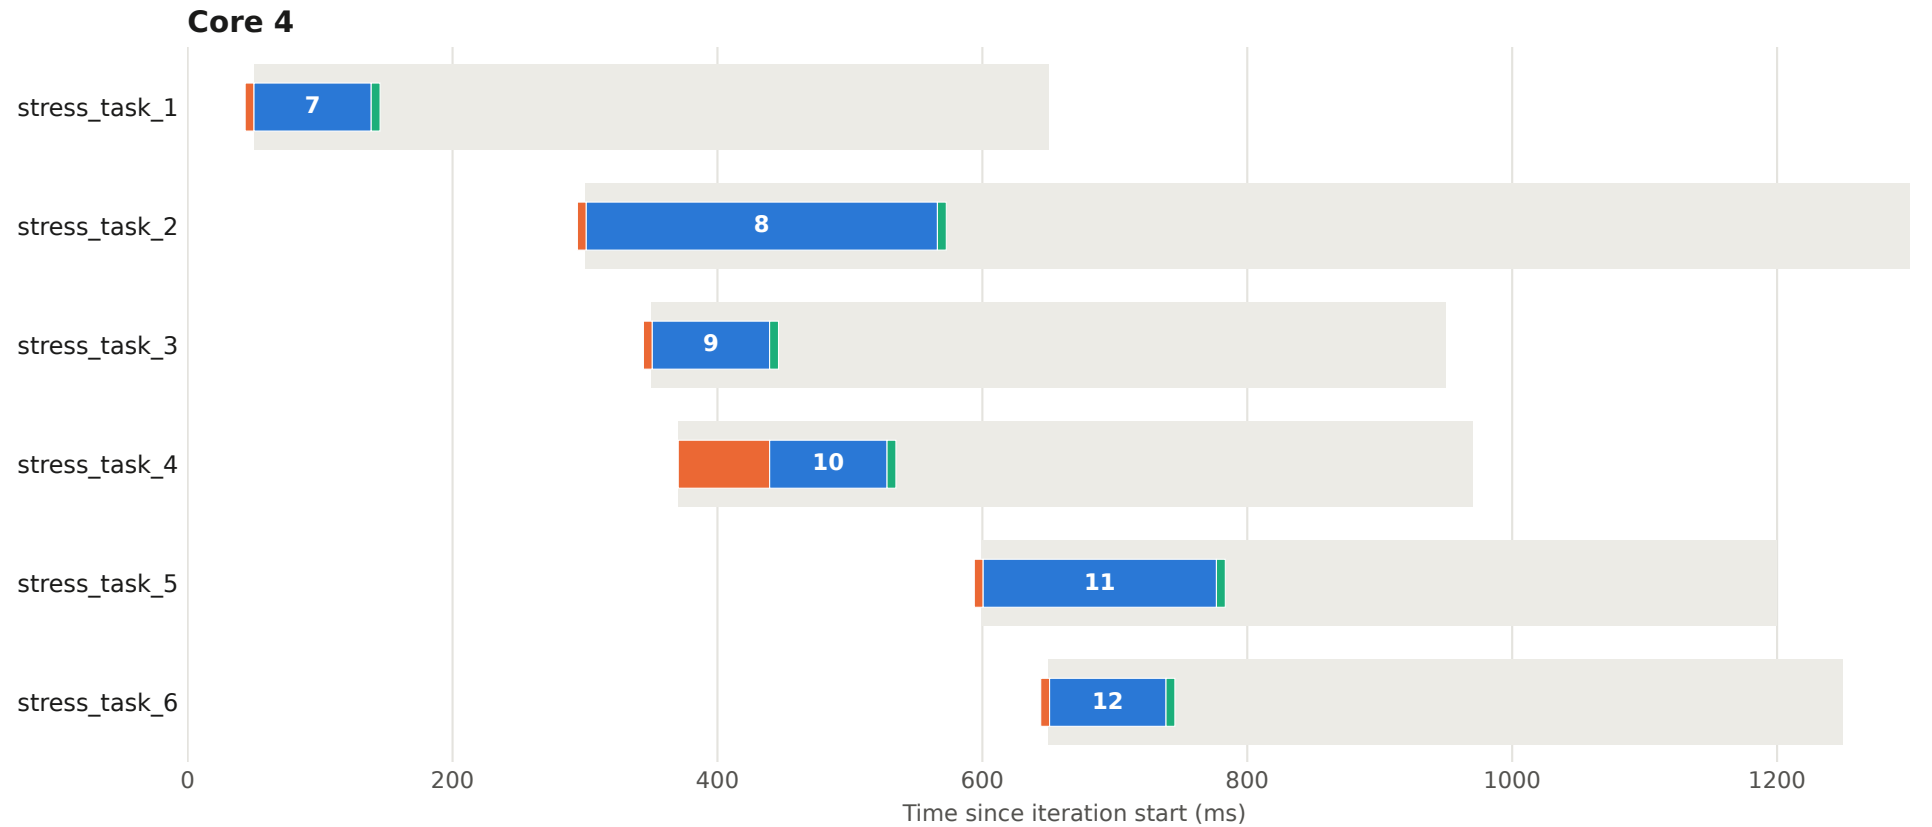


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 18 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

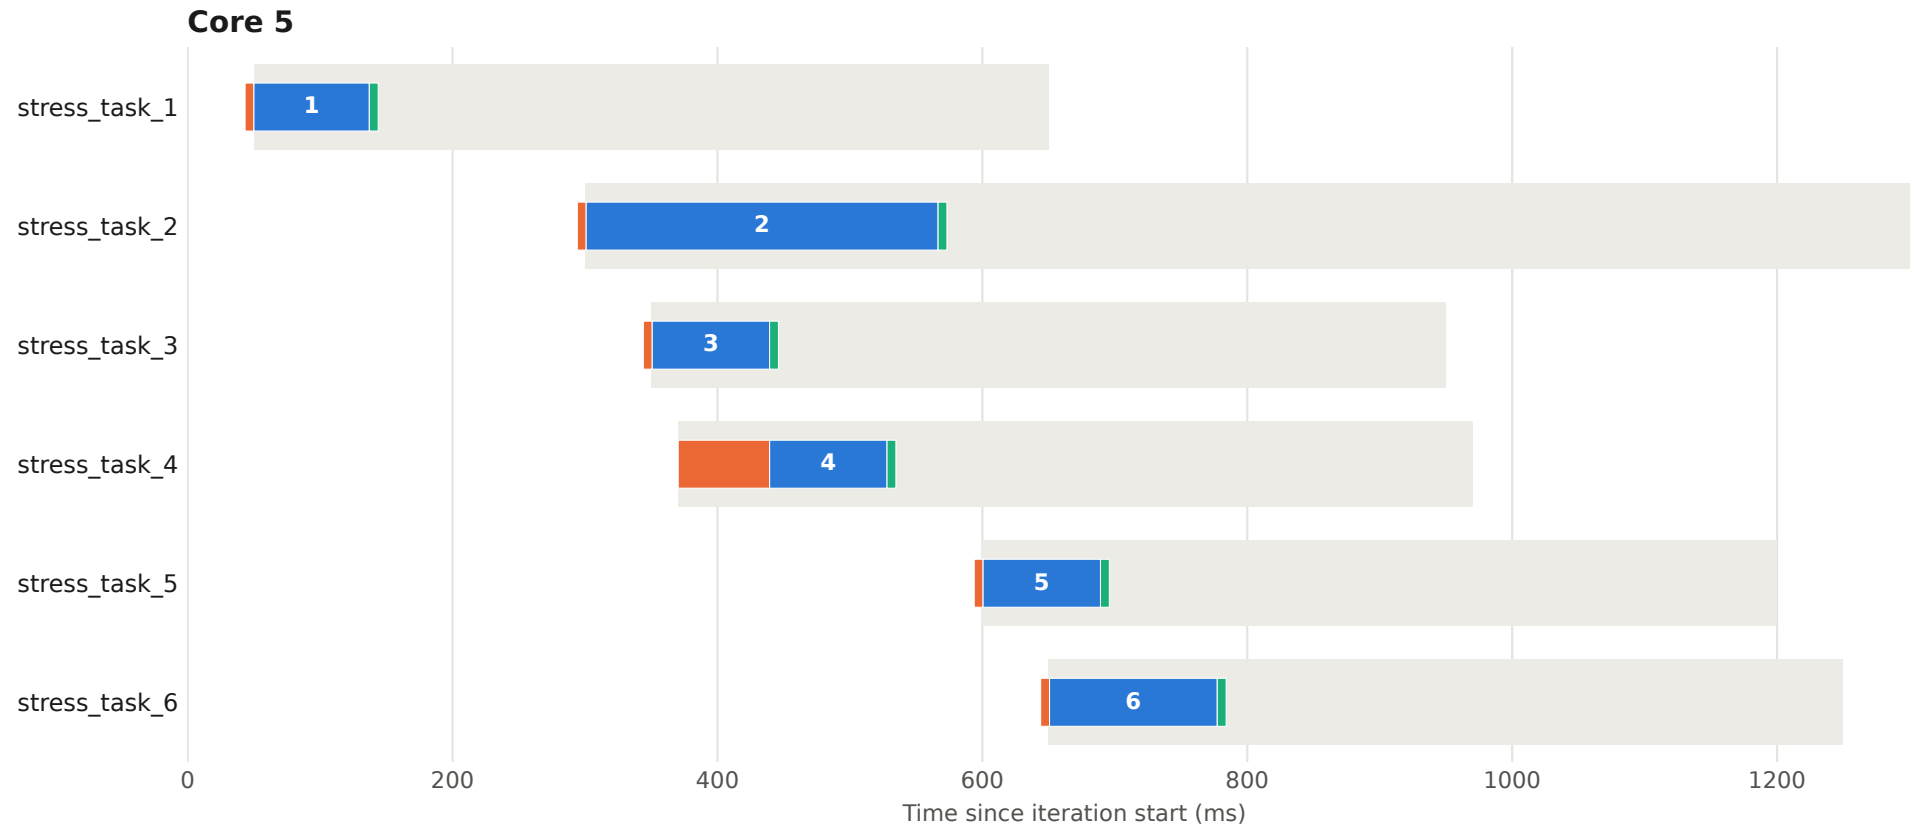


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 19 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

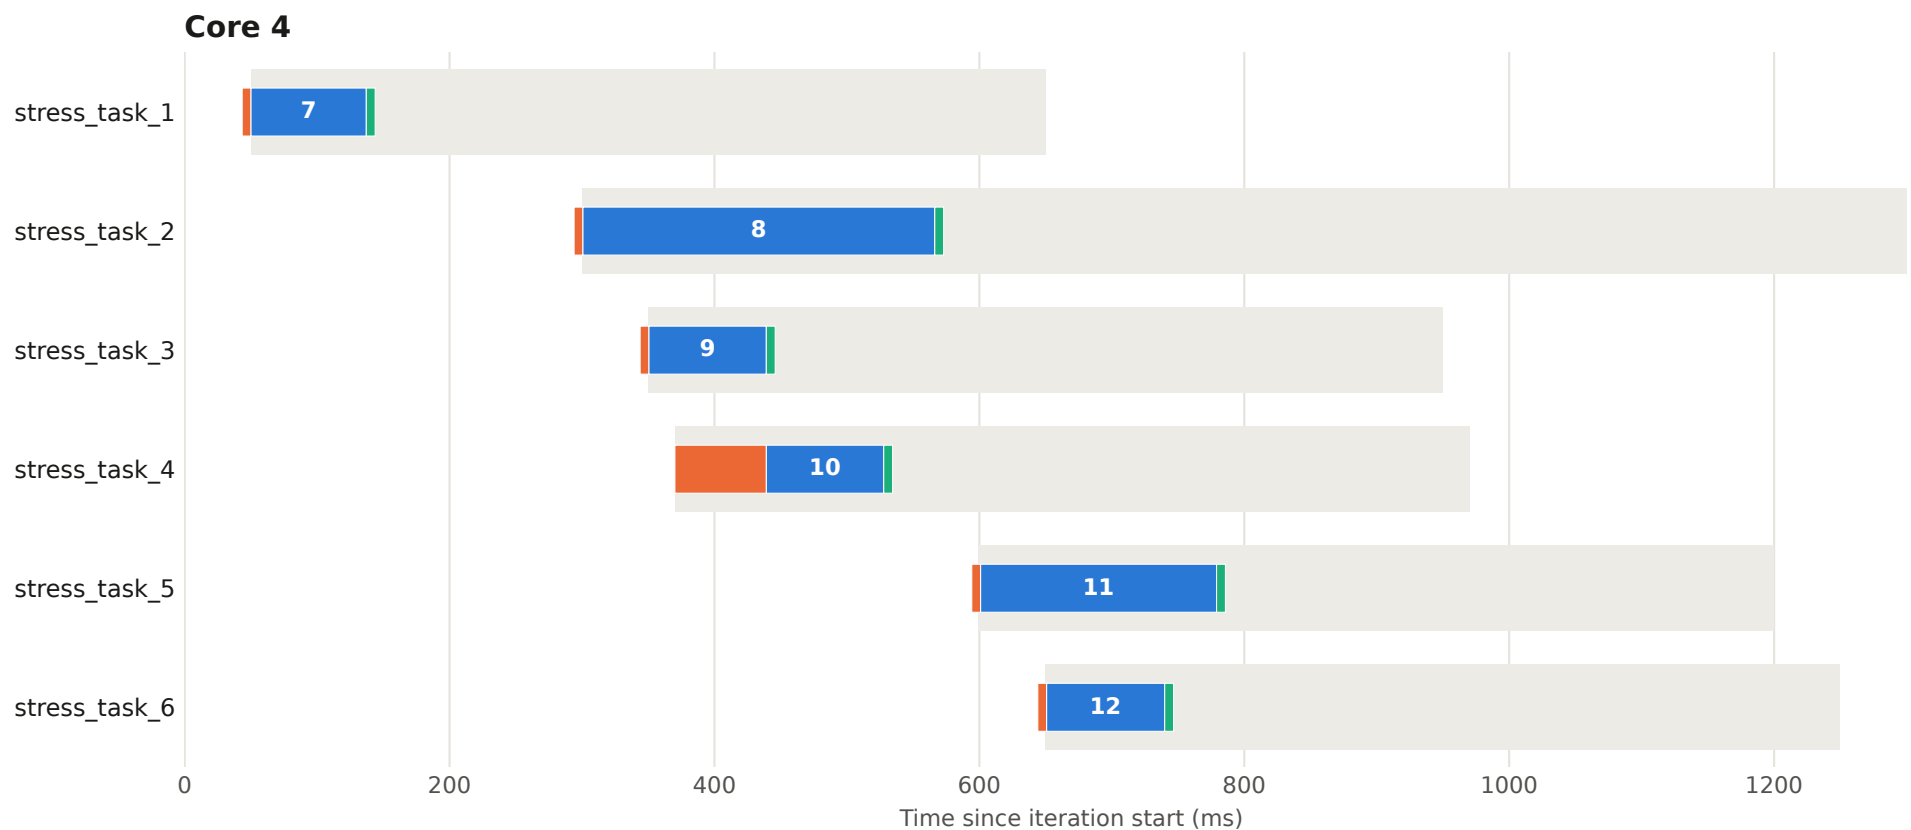


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 19 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

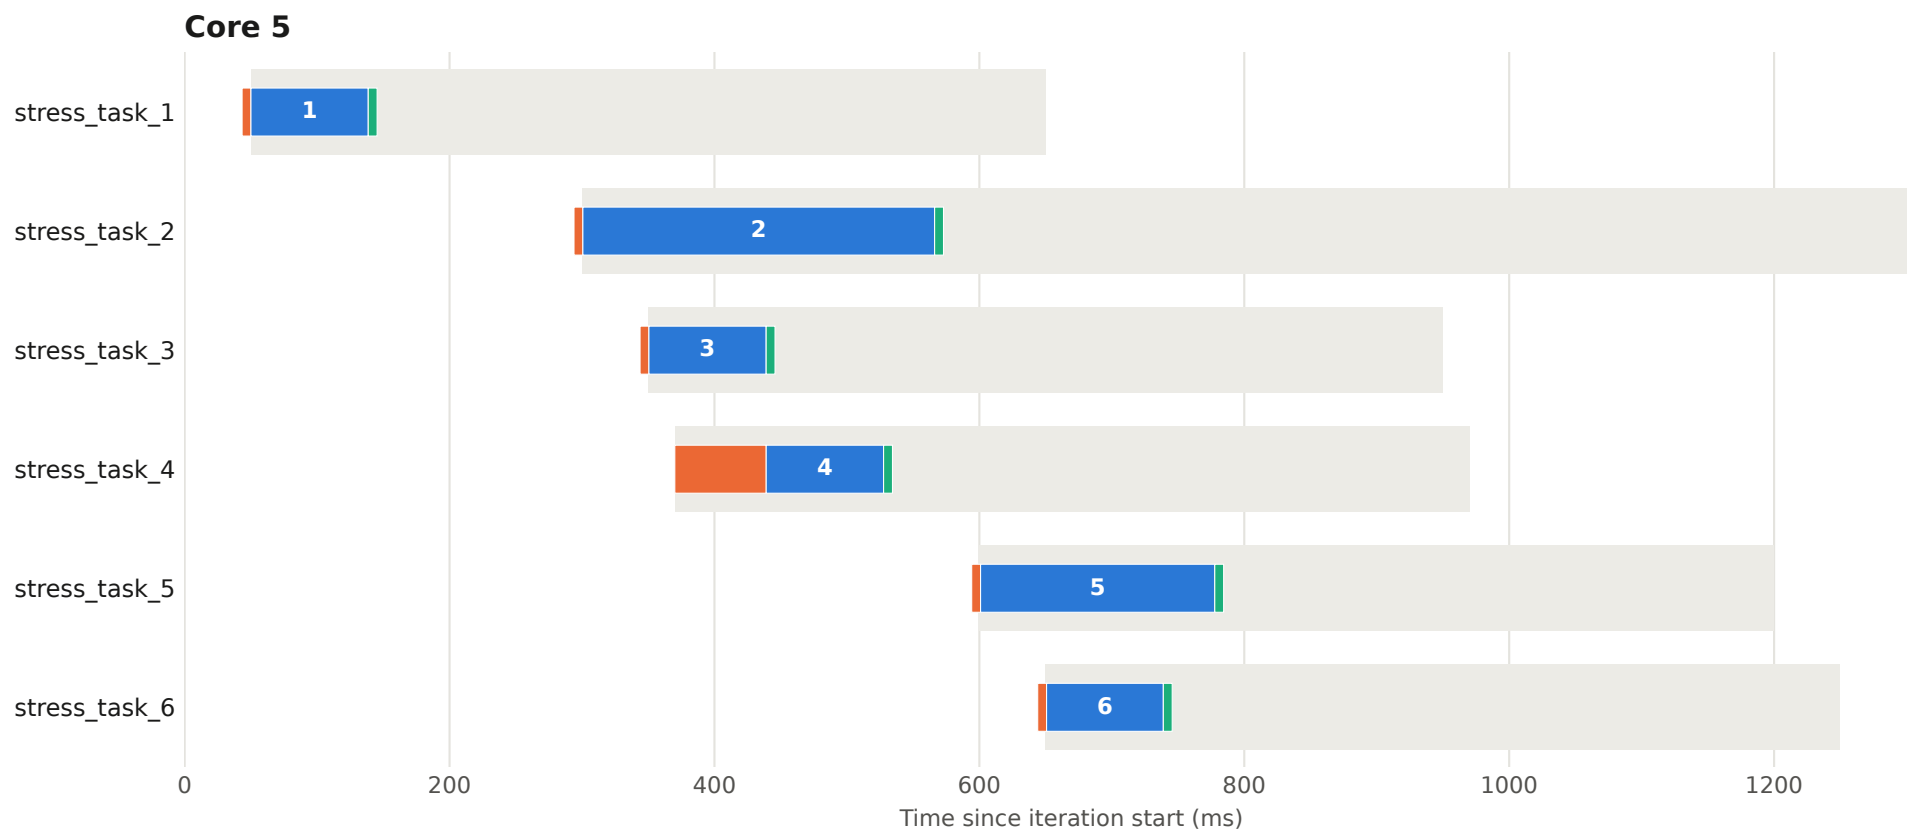


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 20 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

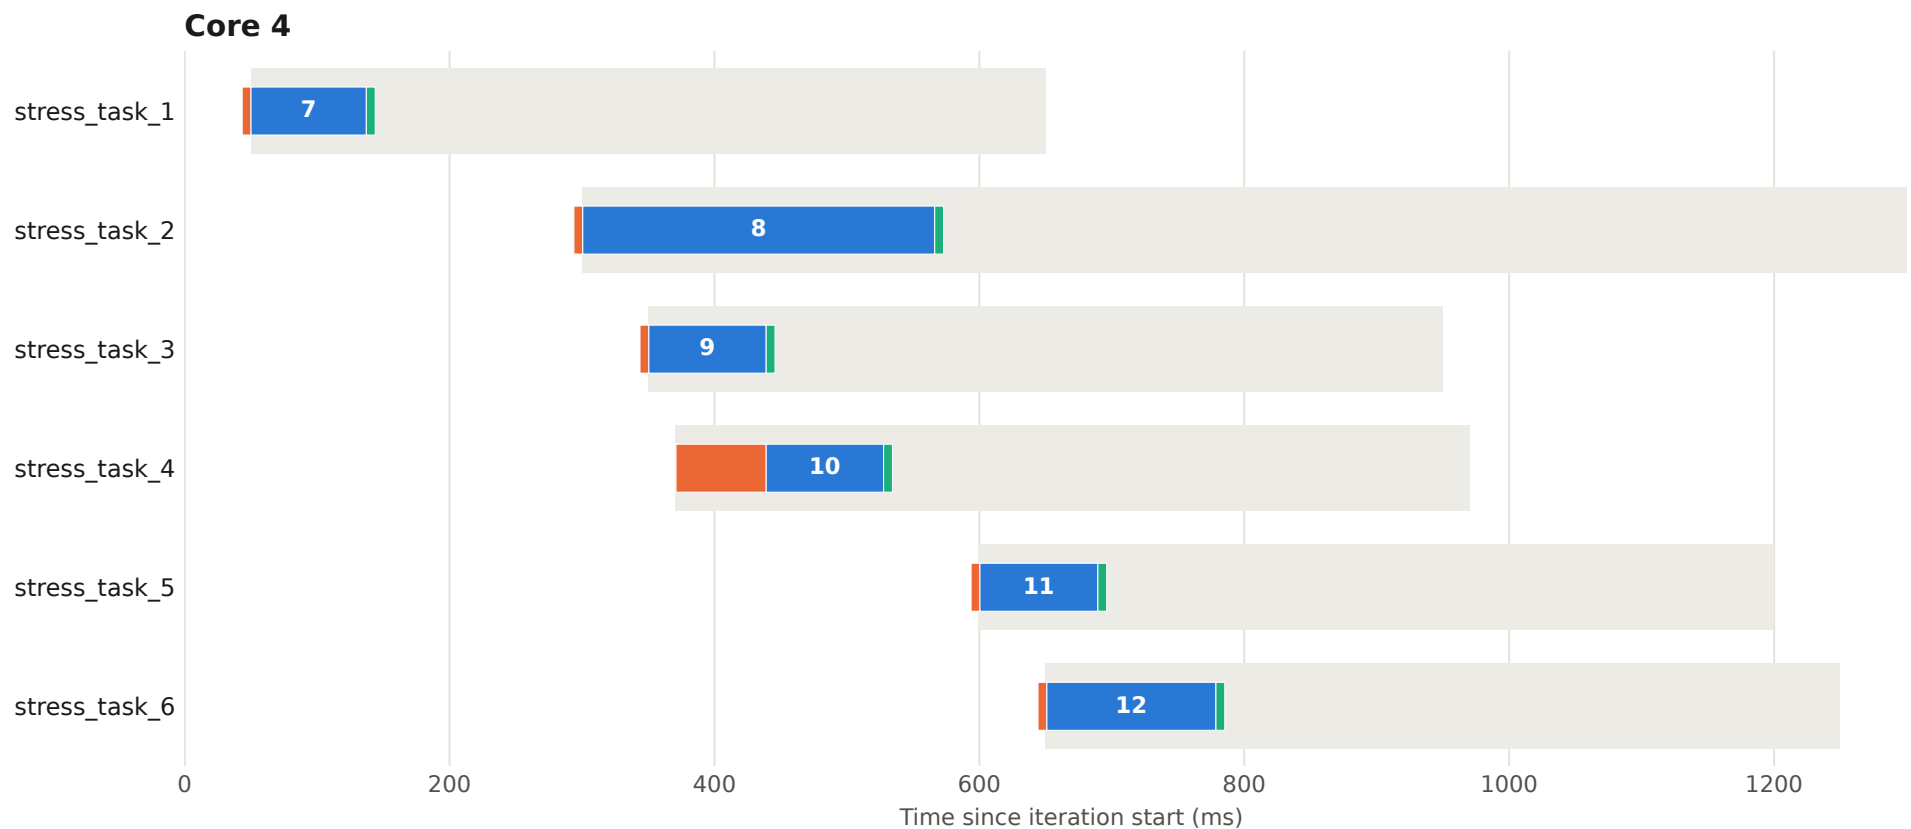


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 20 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

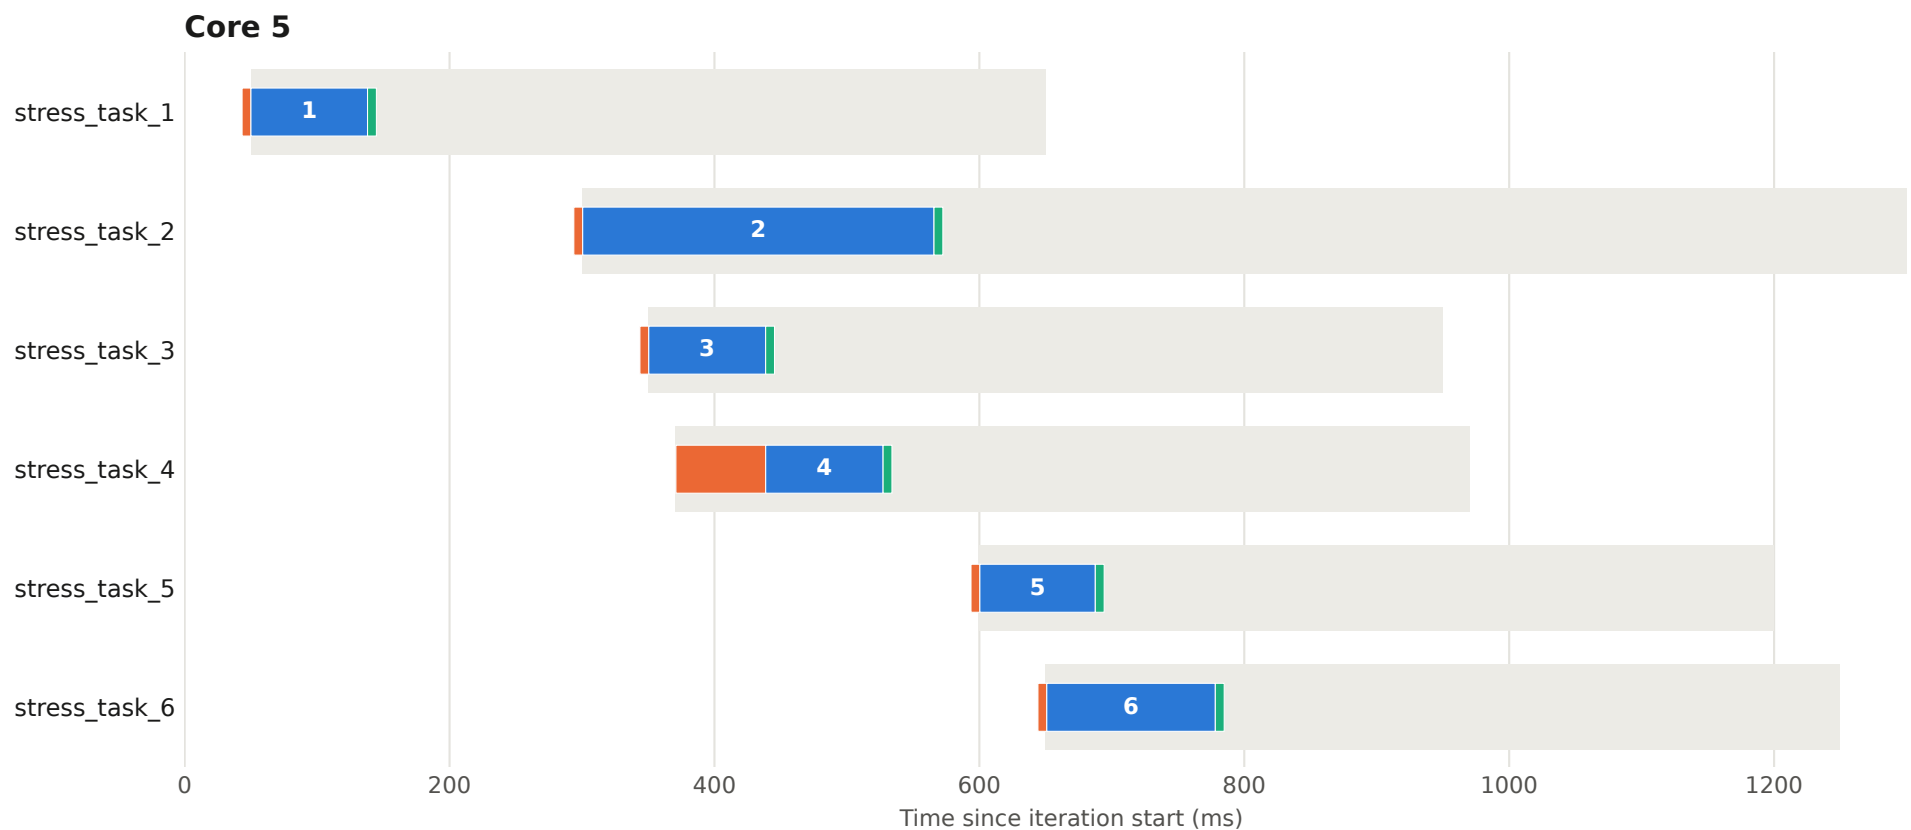


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 21 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

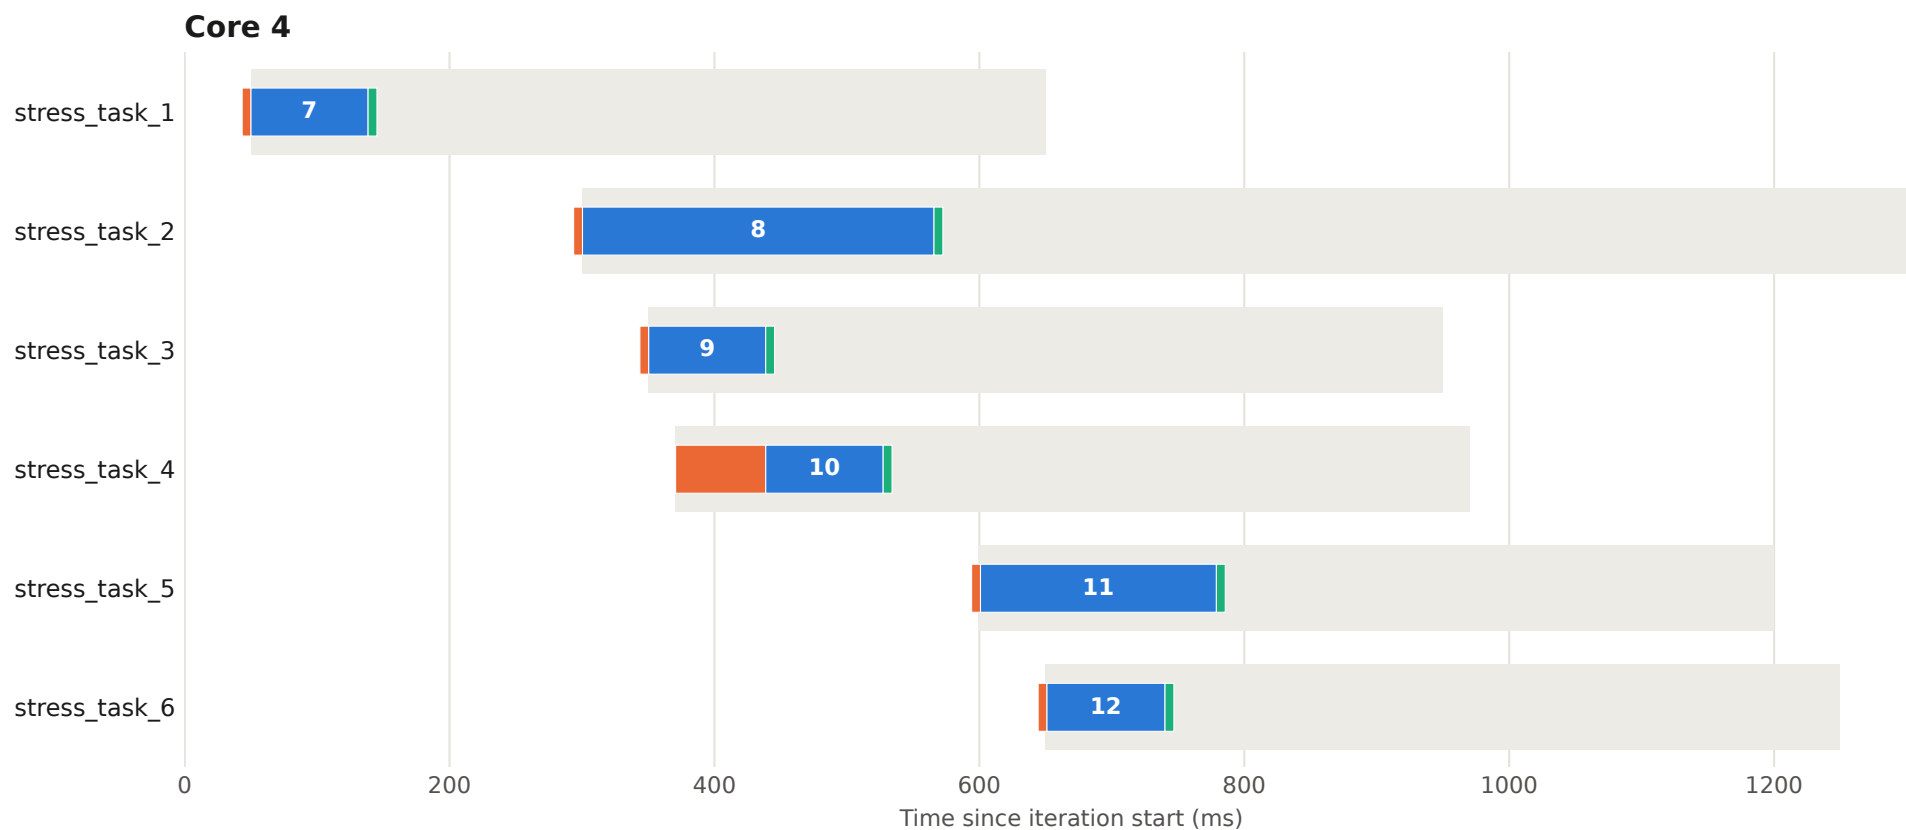


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 21 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

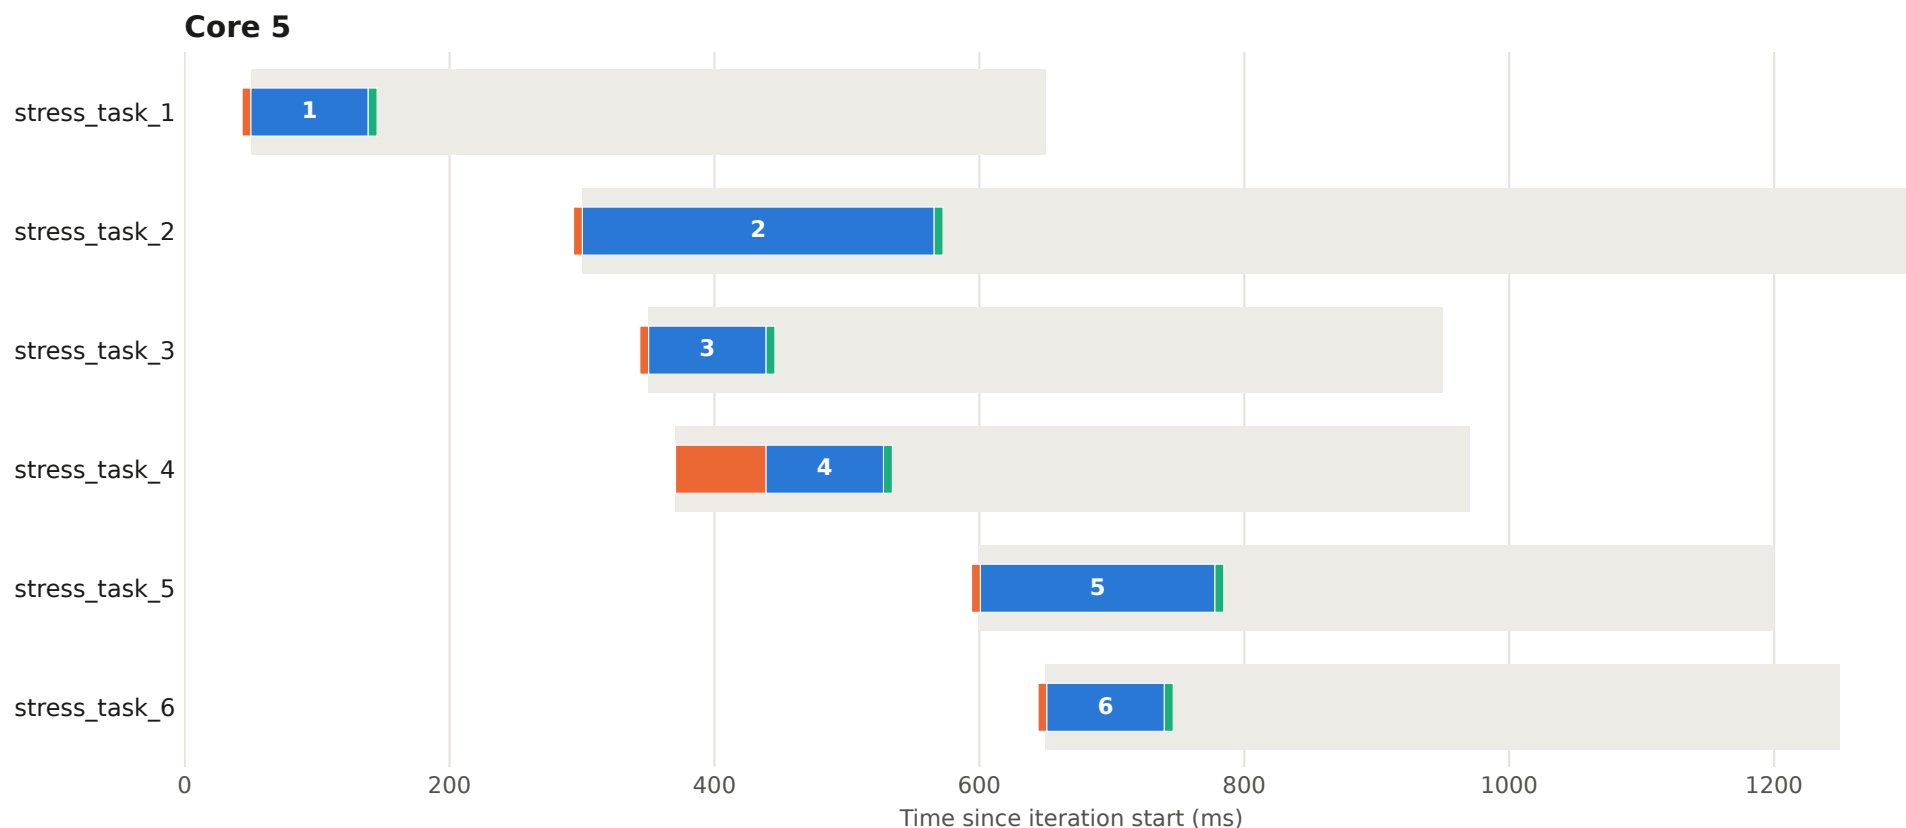


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 22 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

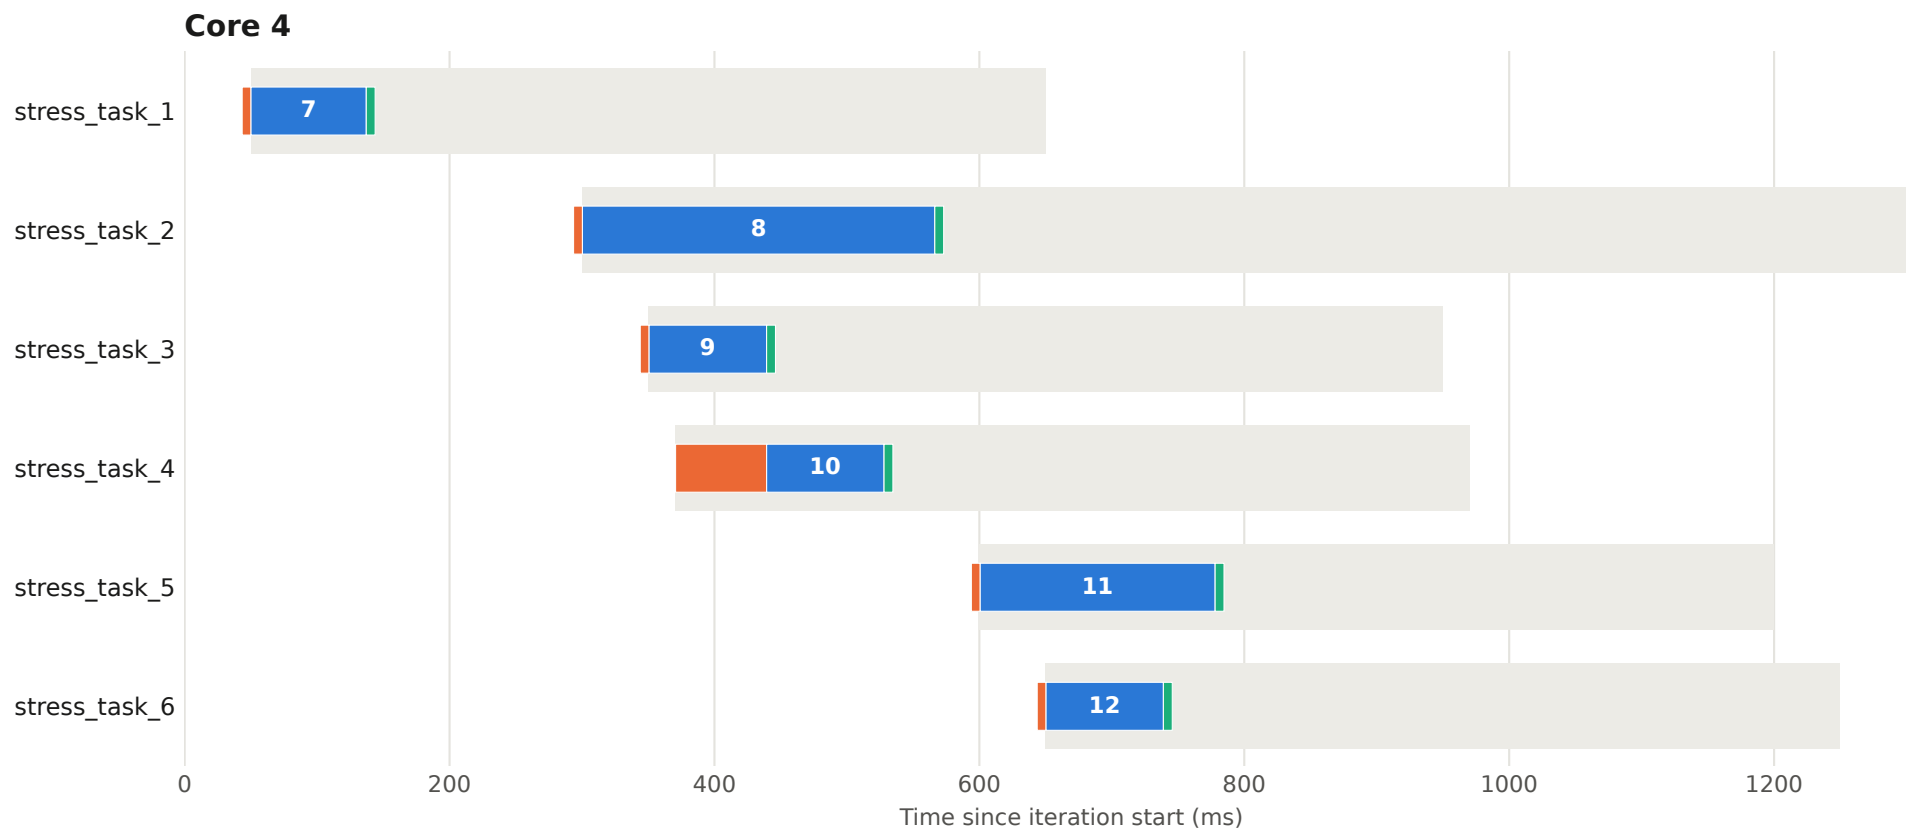


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 22 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

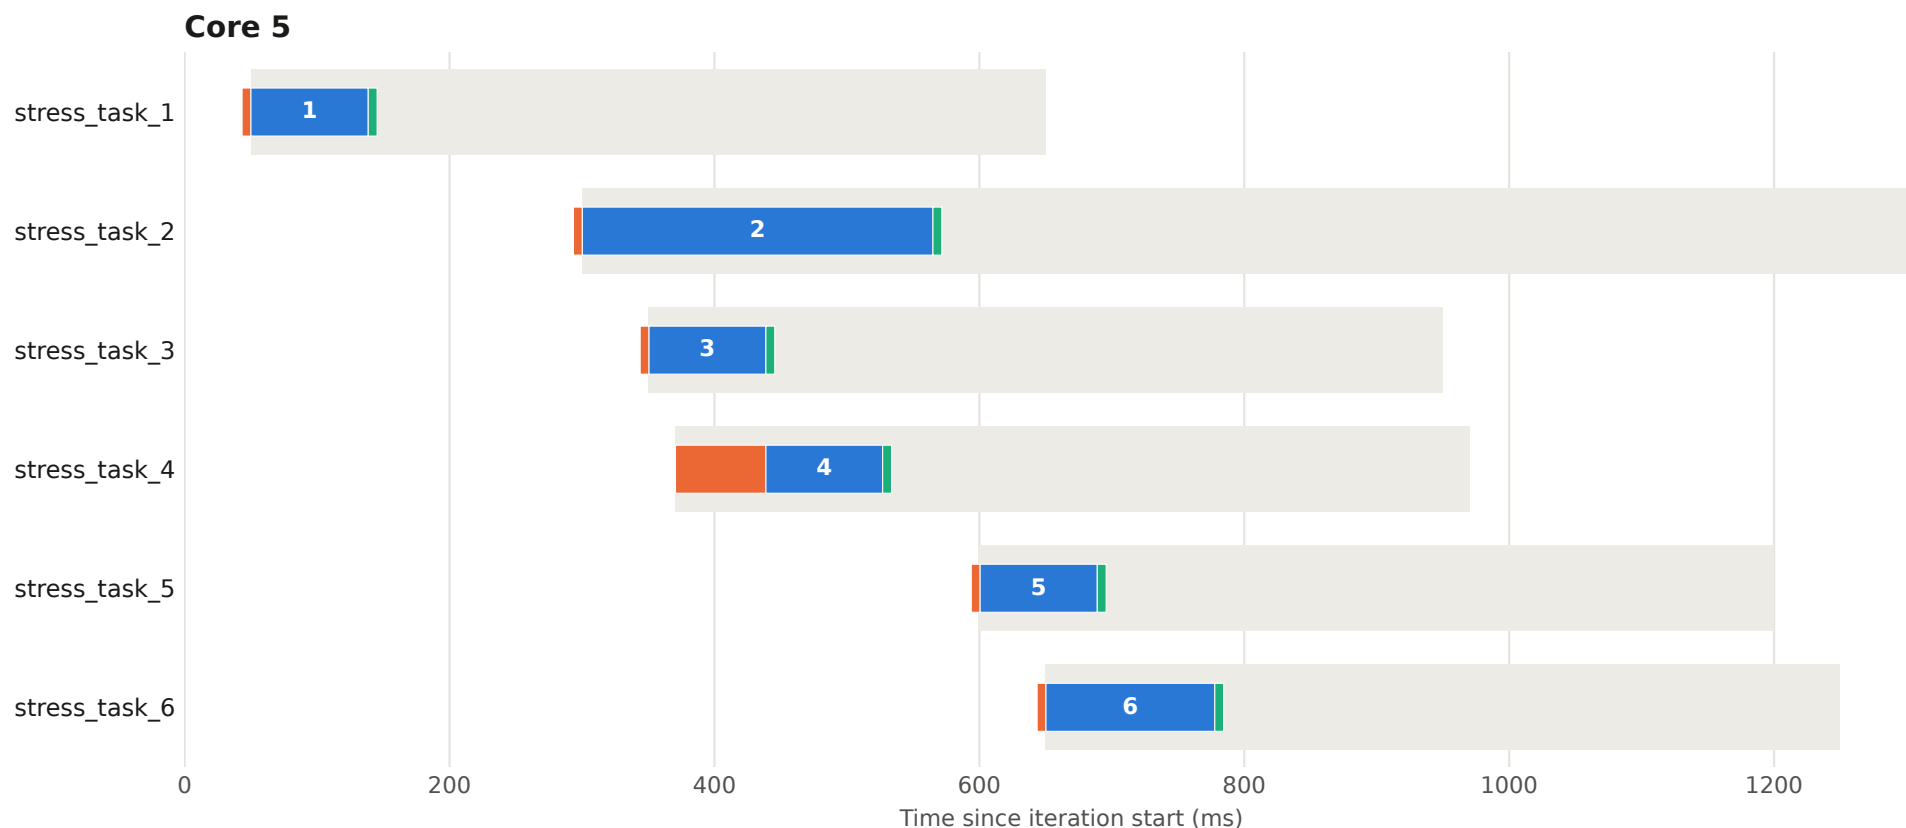


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 23 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

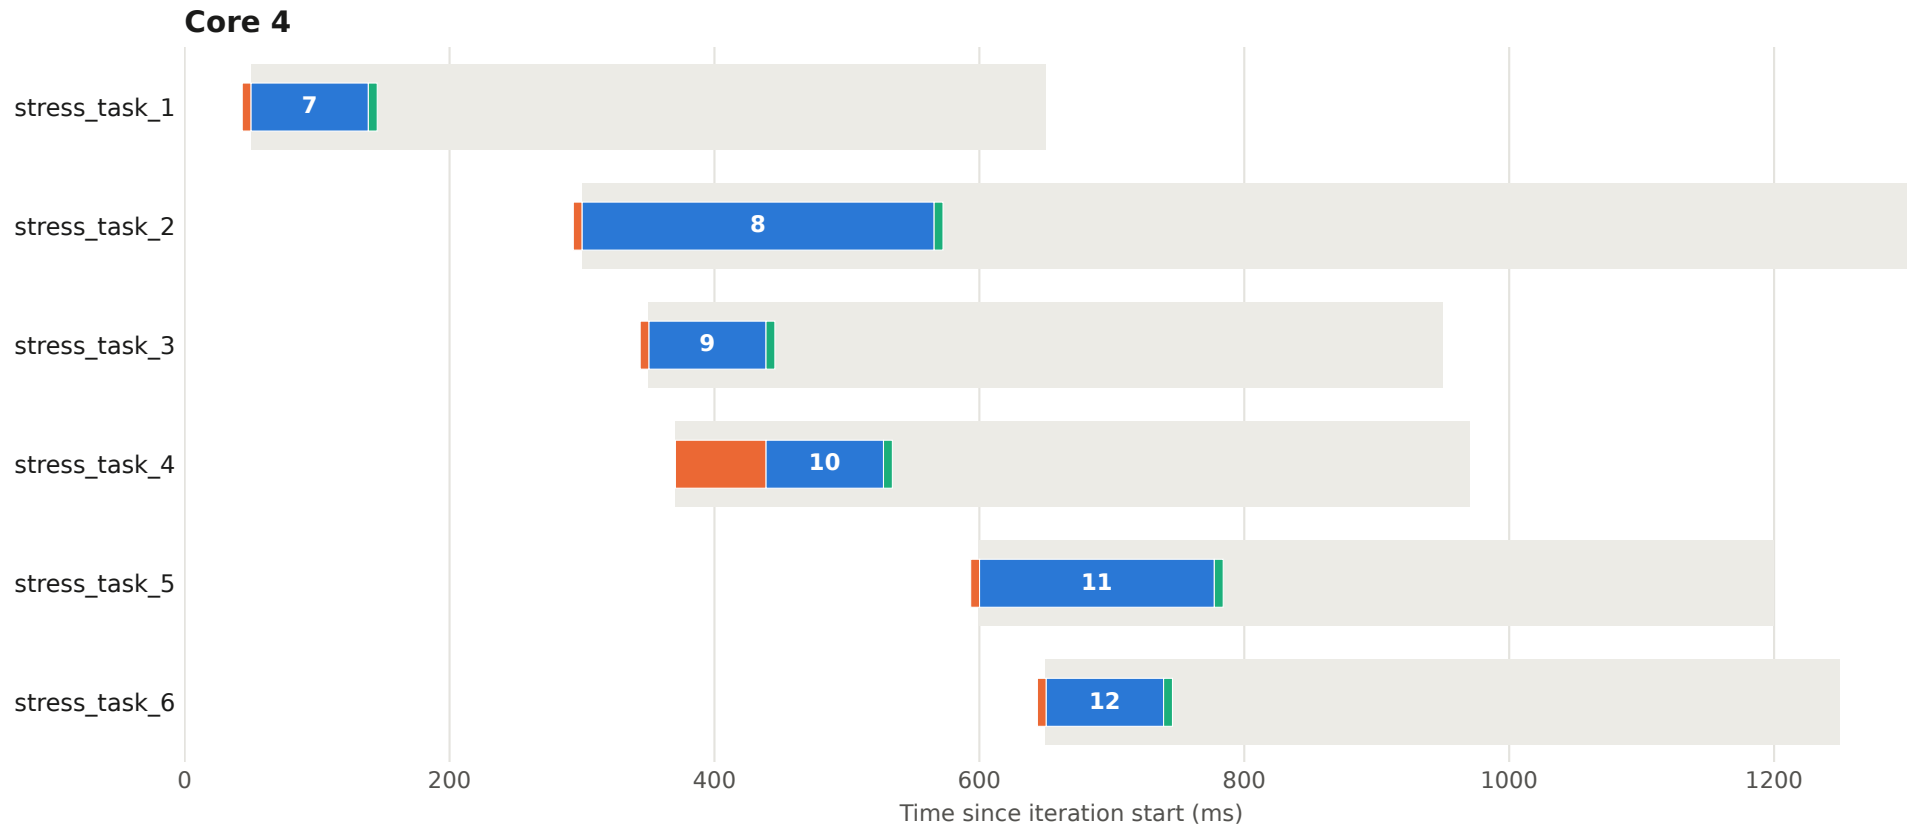


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 23 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

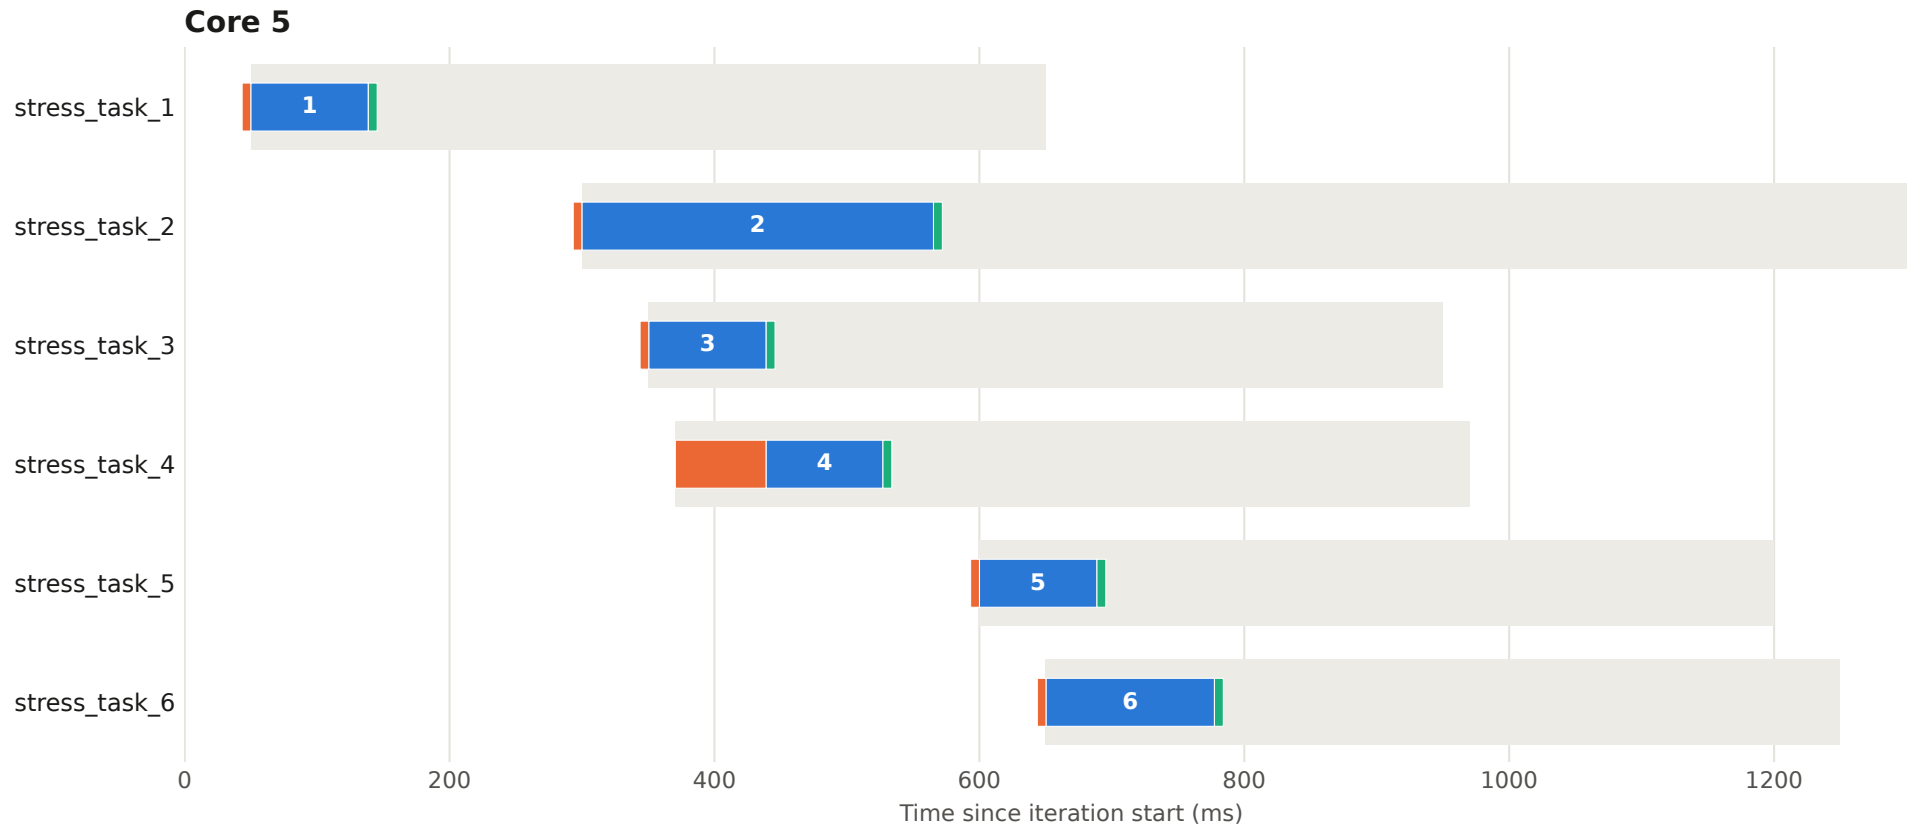


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 24 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

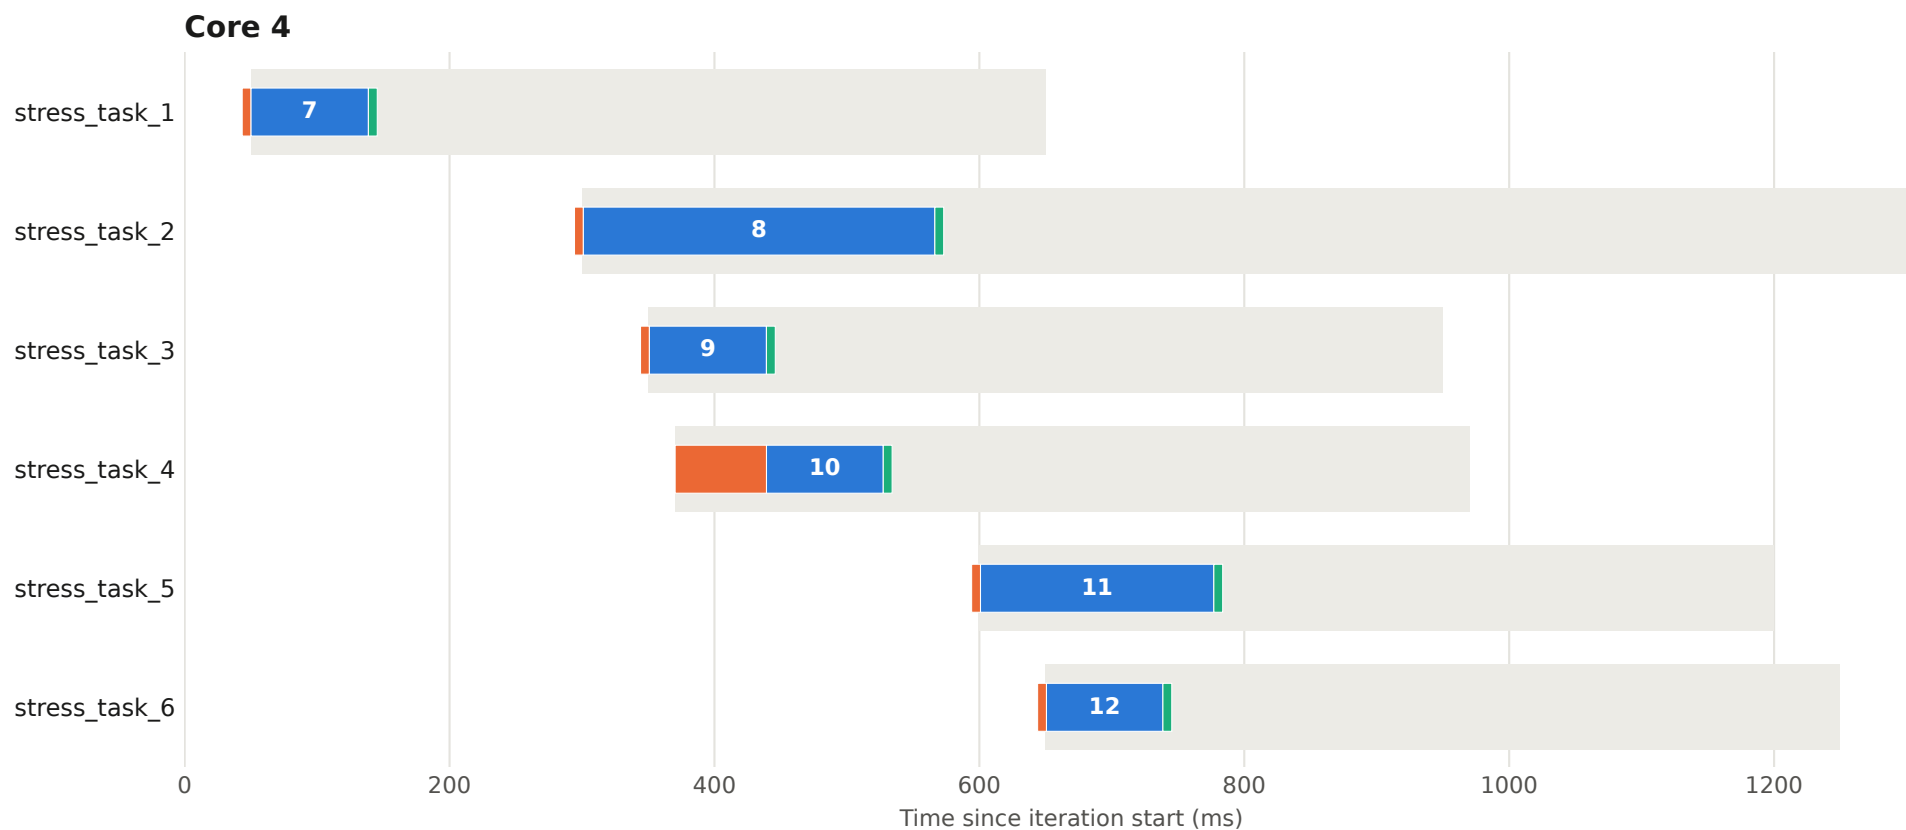


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 24 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

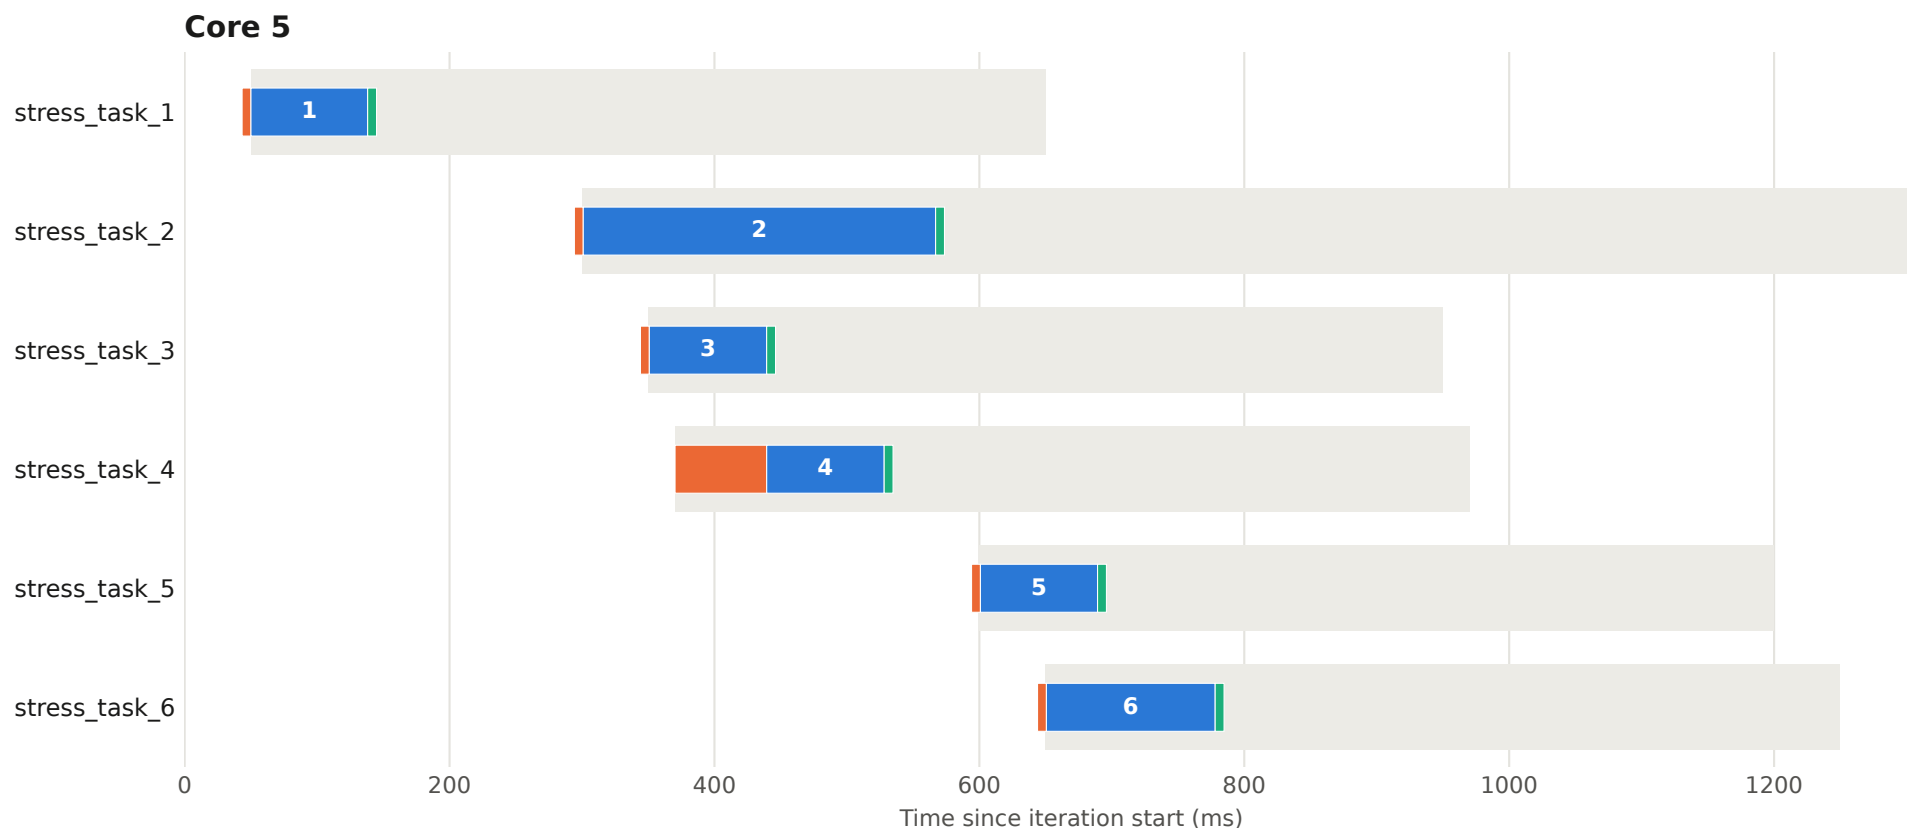


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 25 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

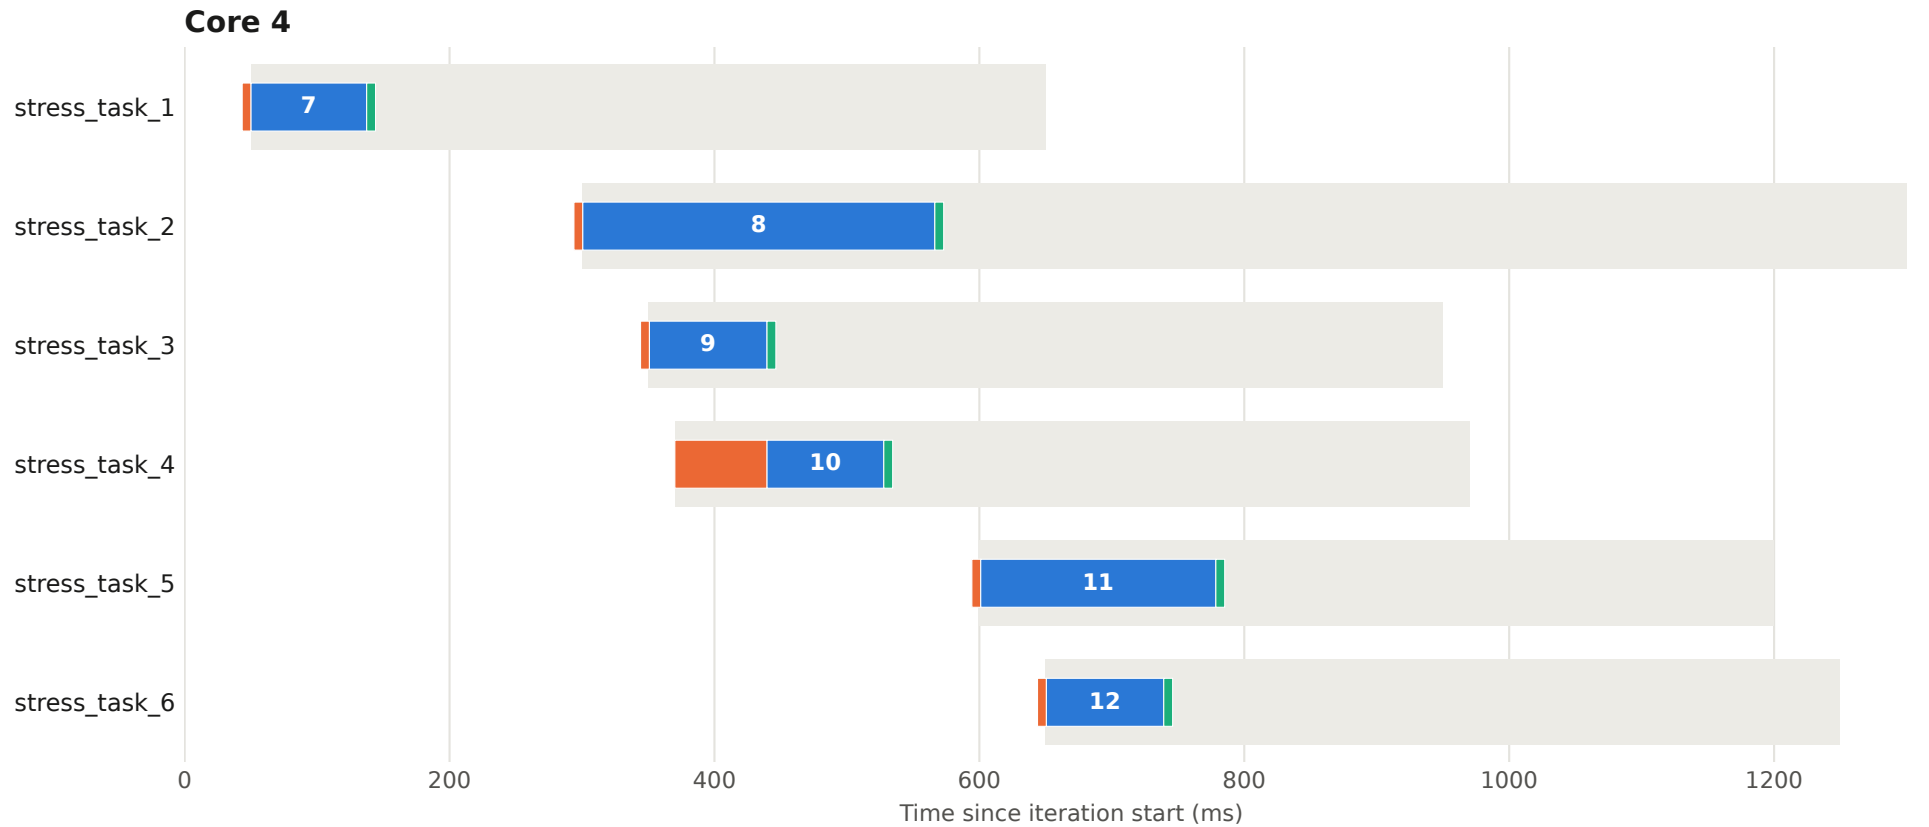


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 25 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

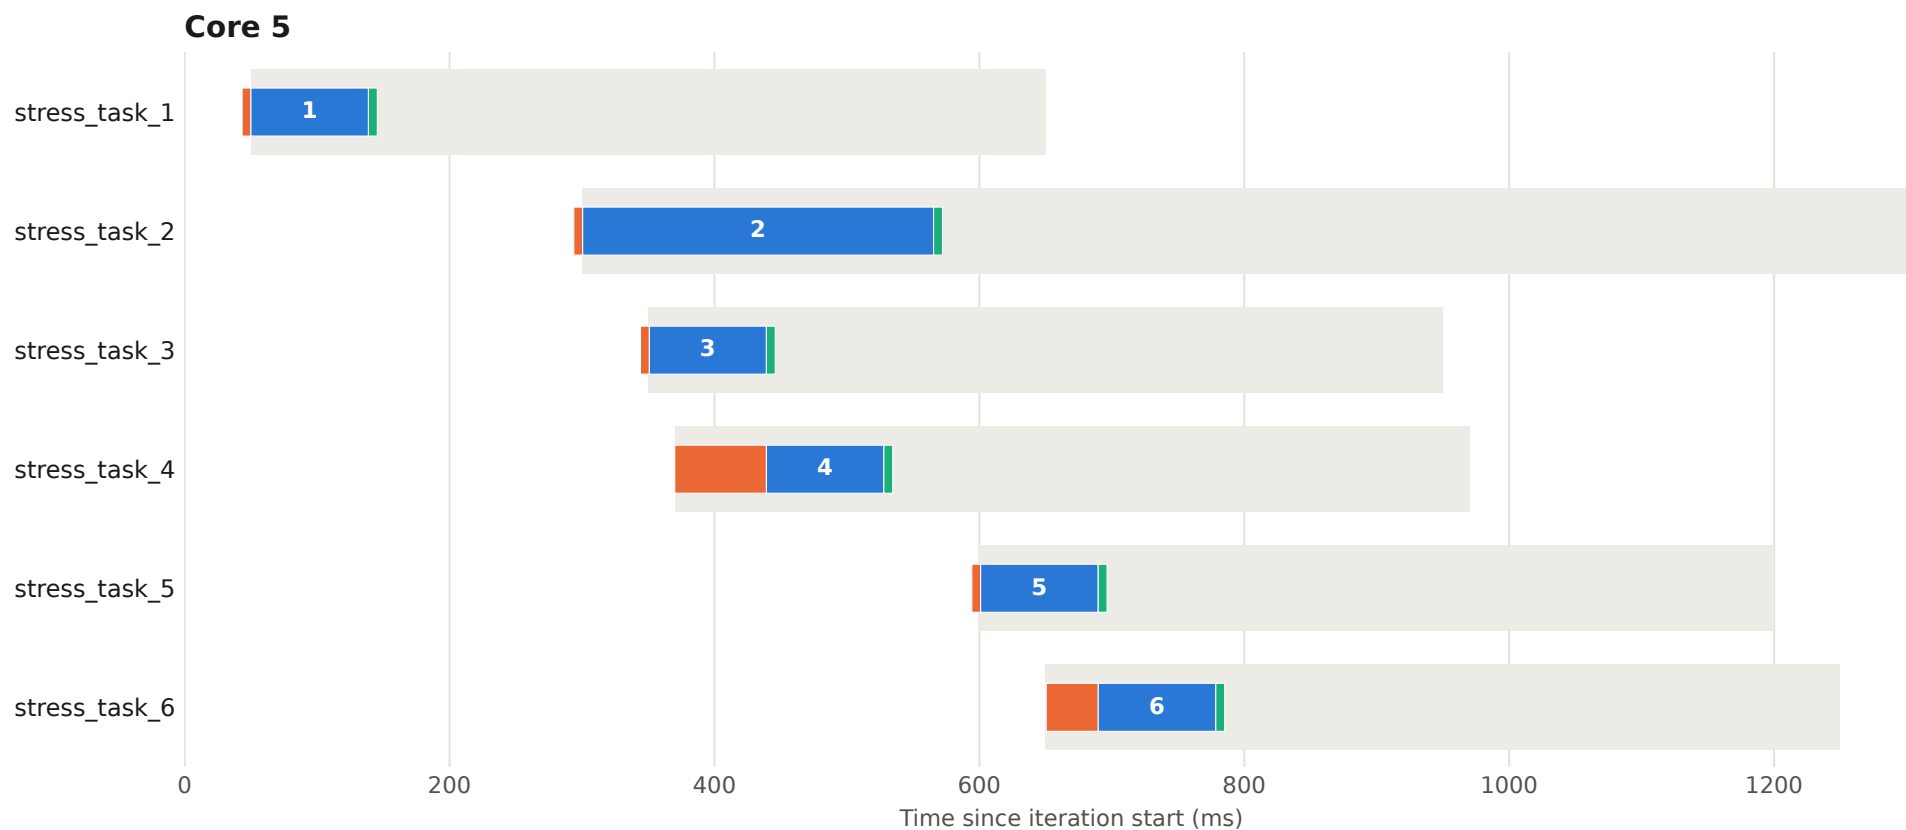


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 26 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

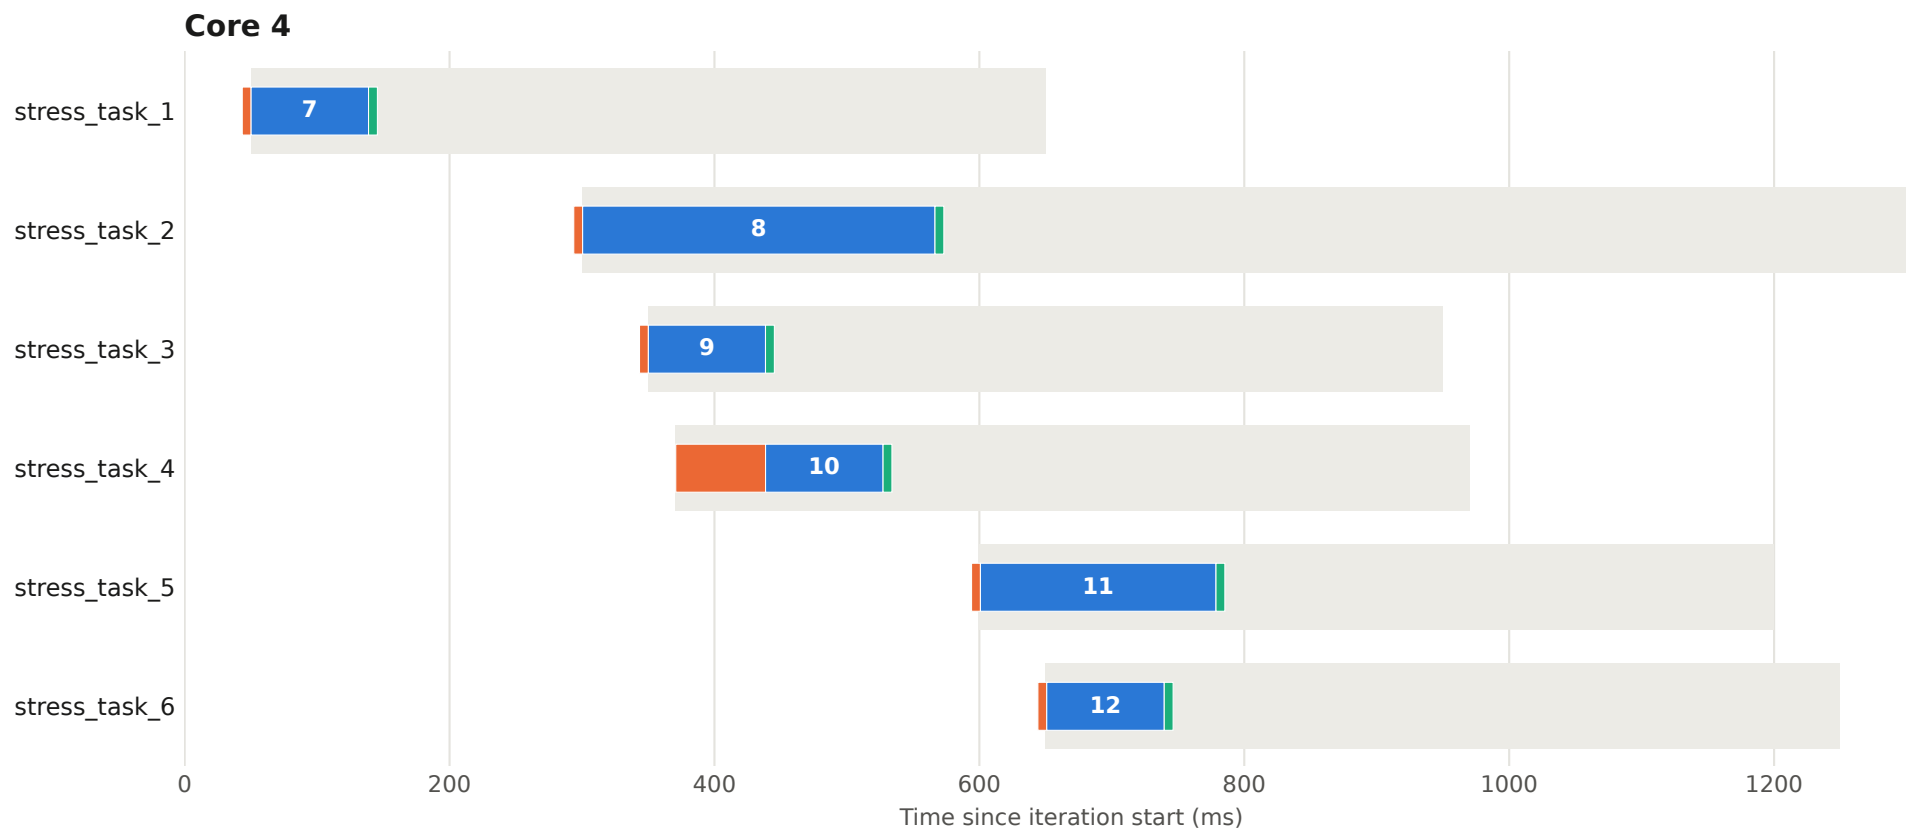


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 26 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

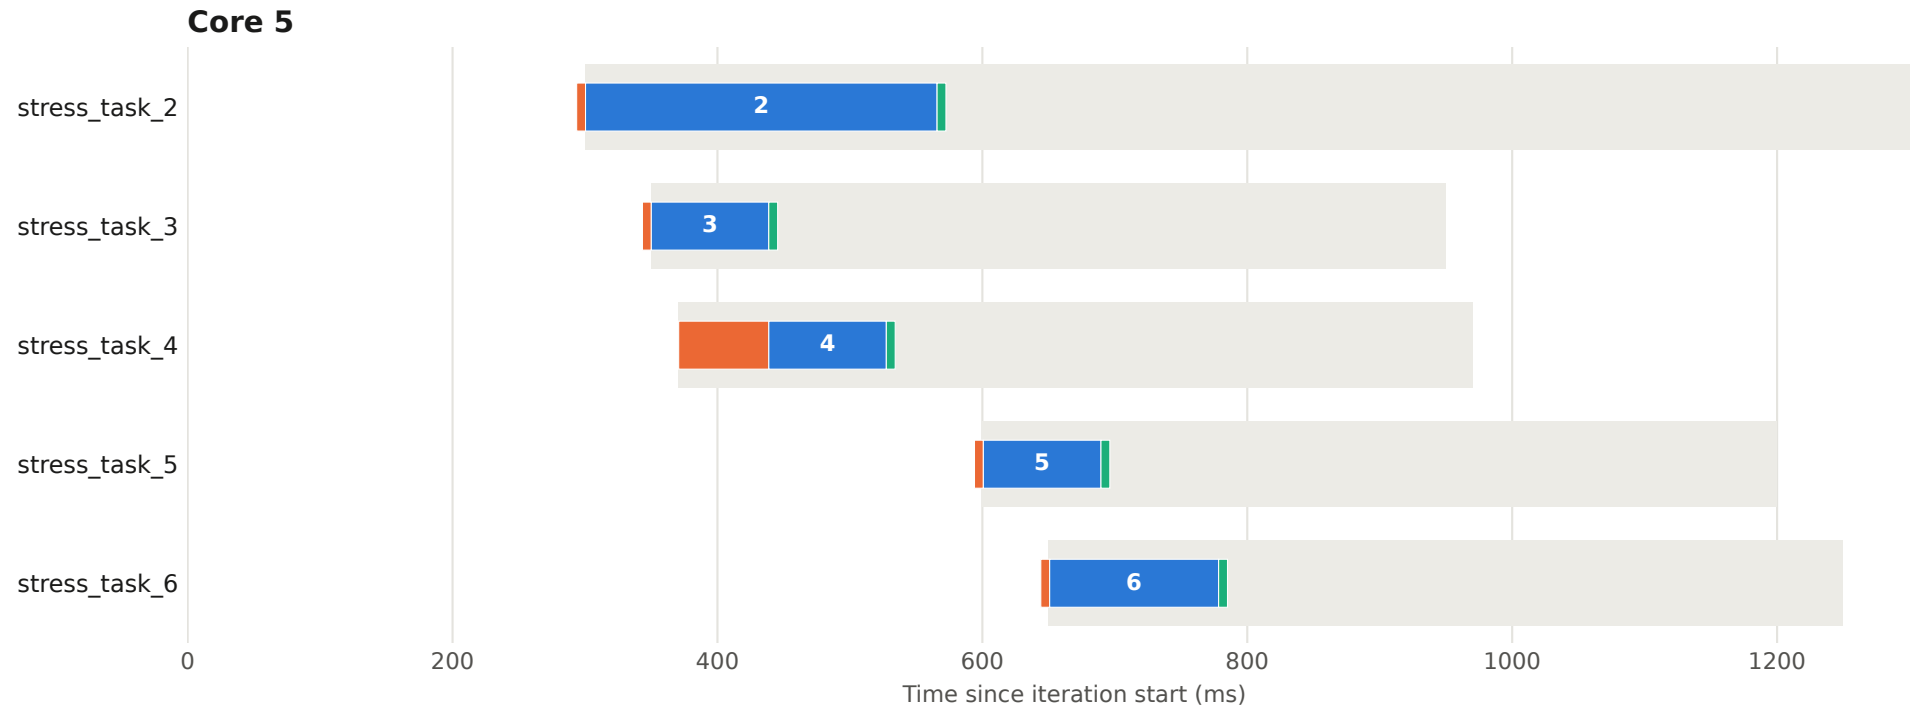


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 27 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

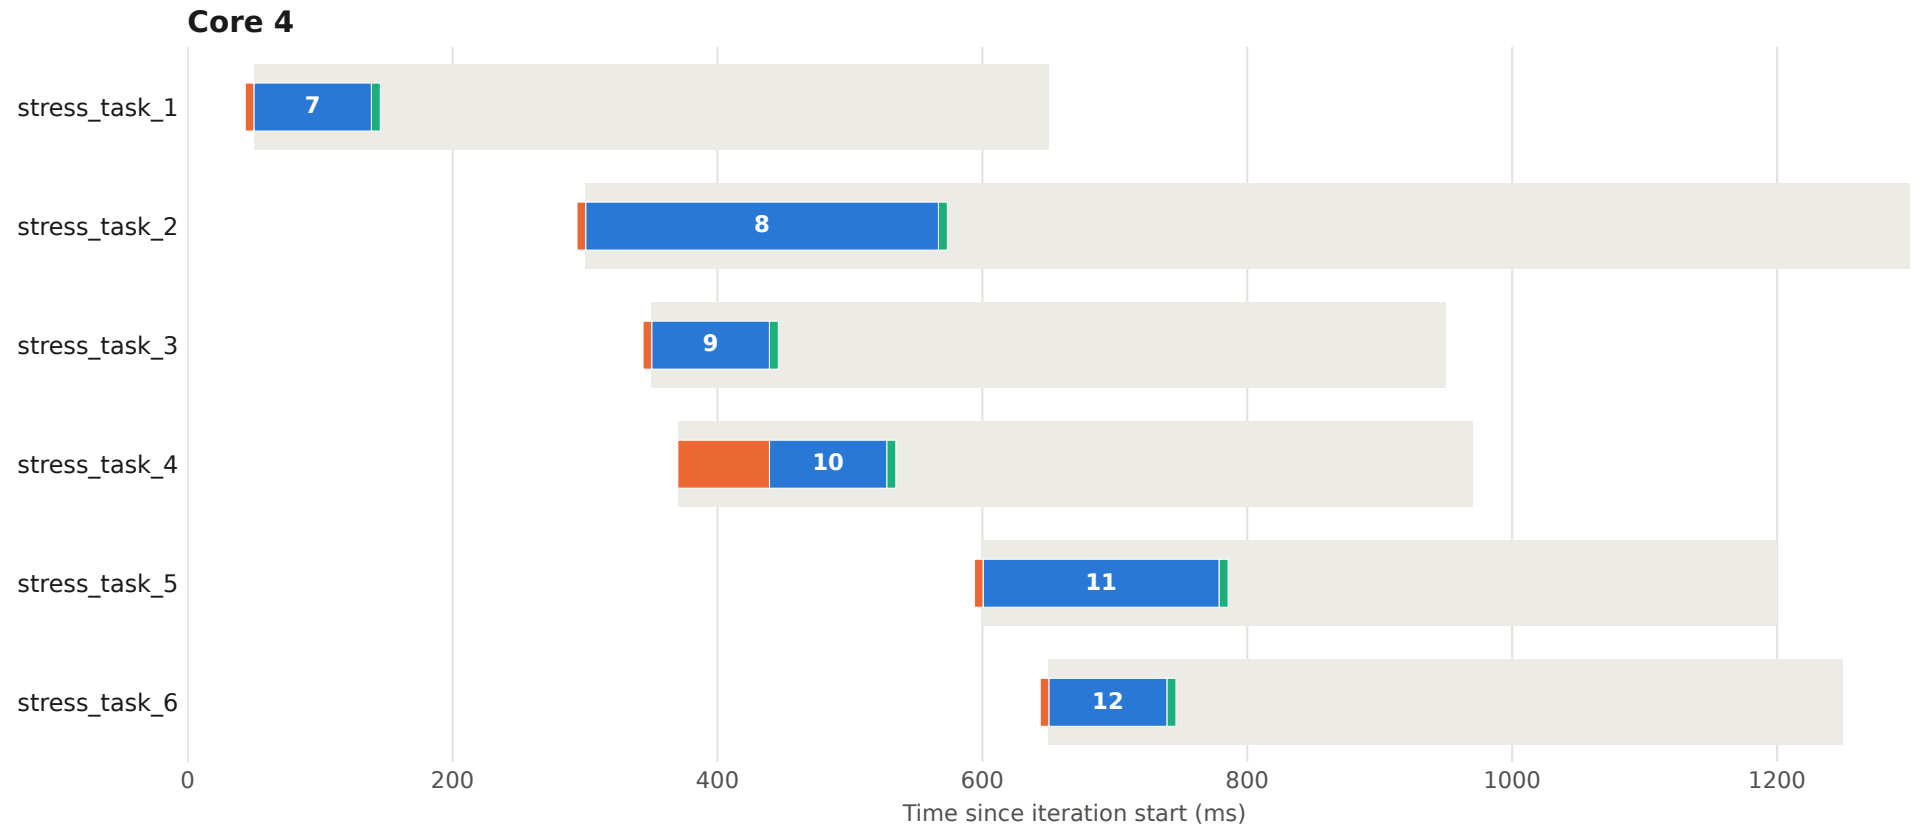


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 27 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

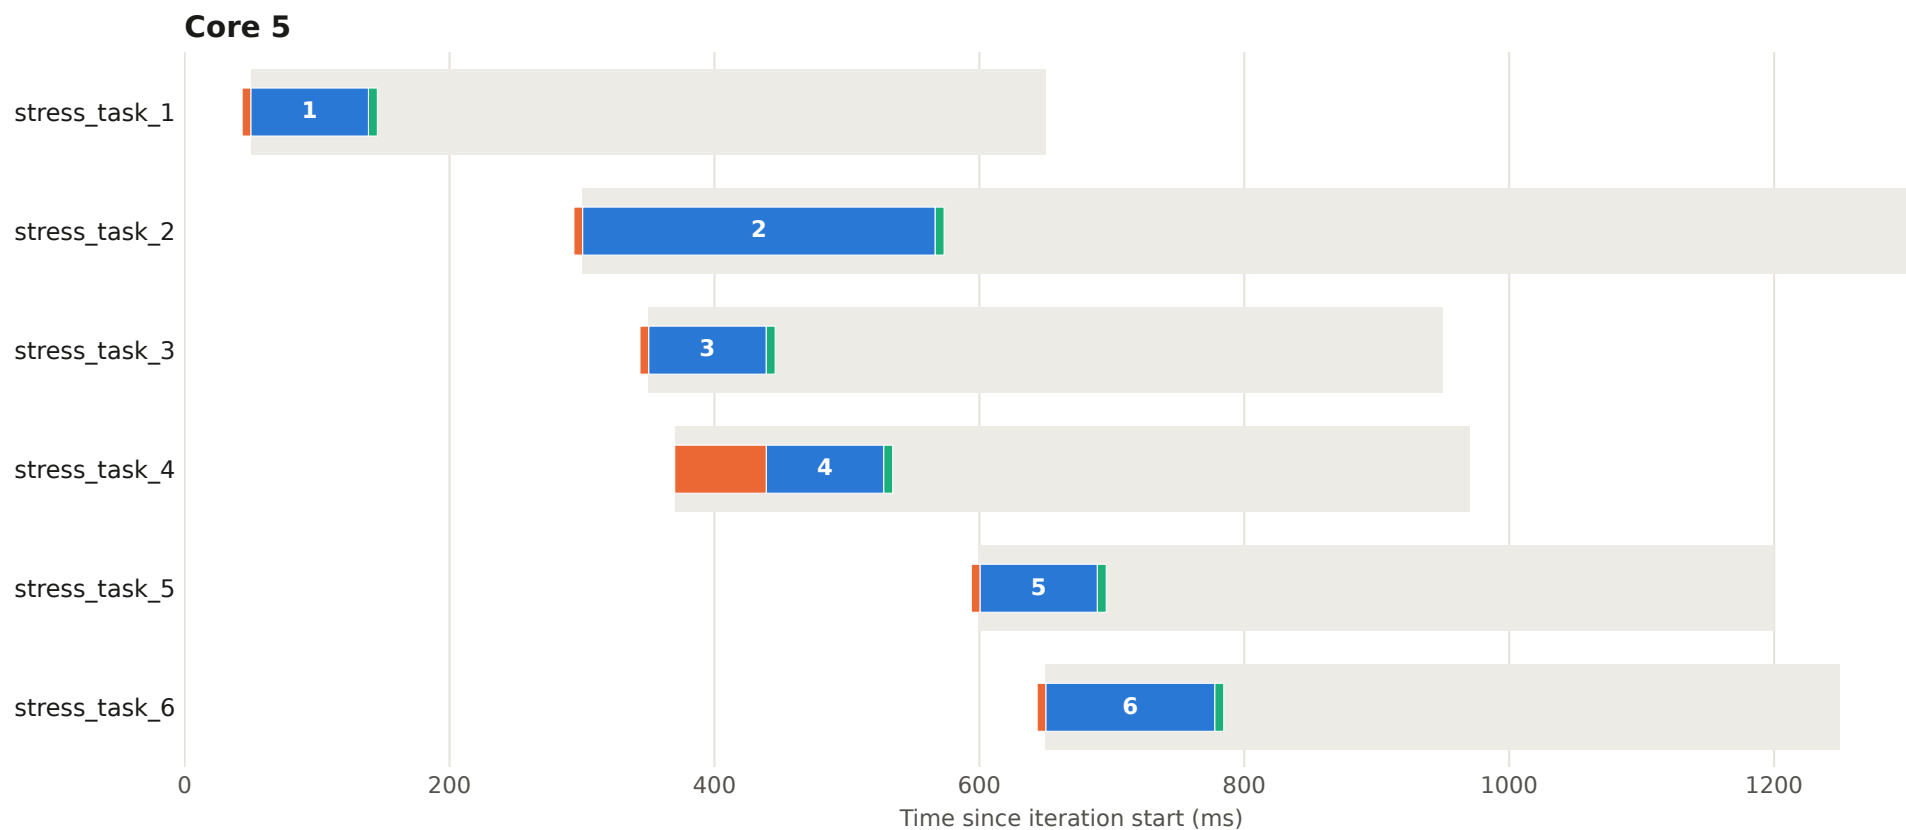


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 28 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

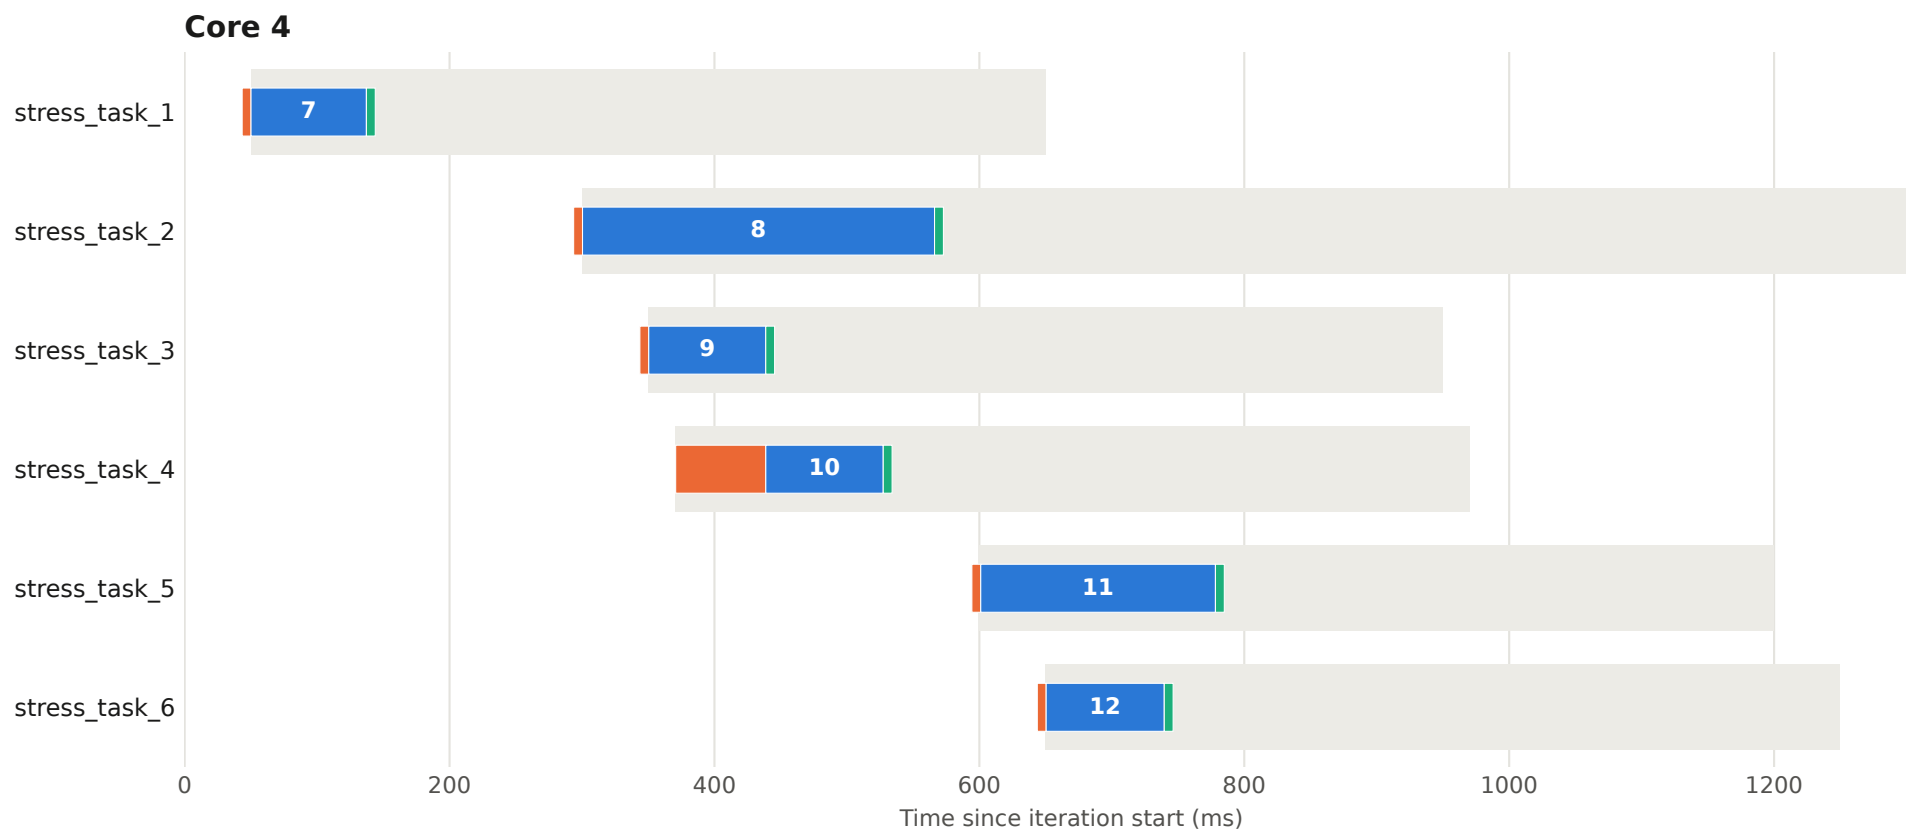


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 28 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

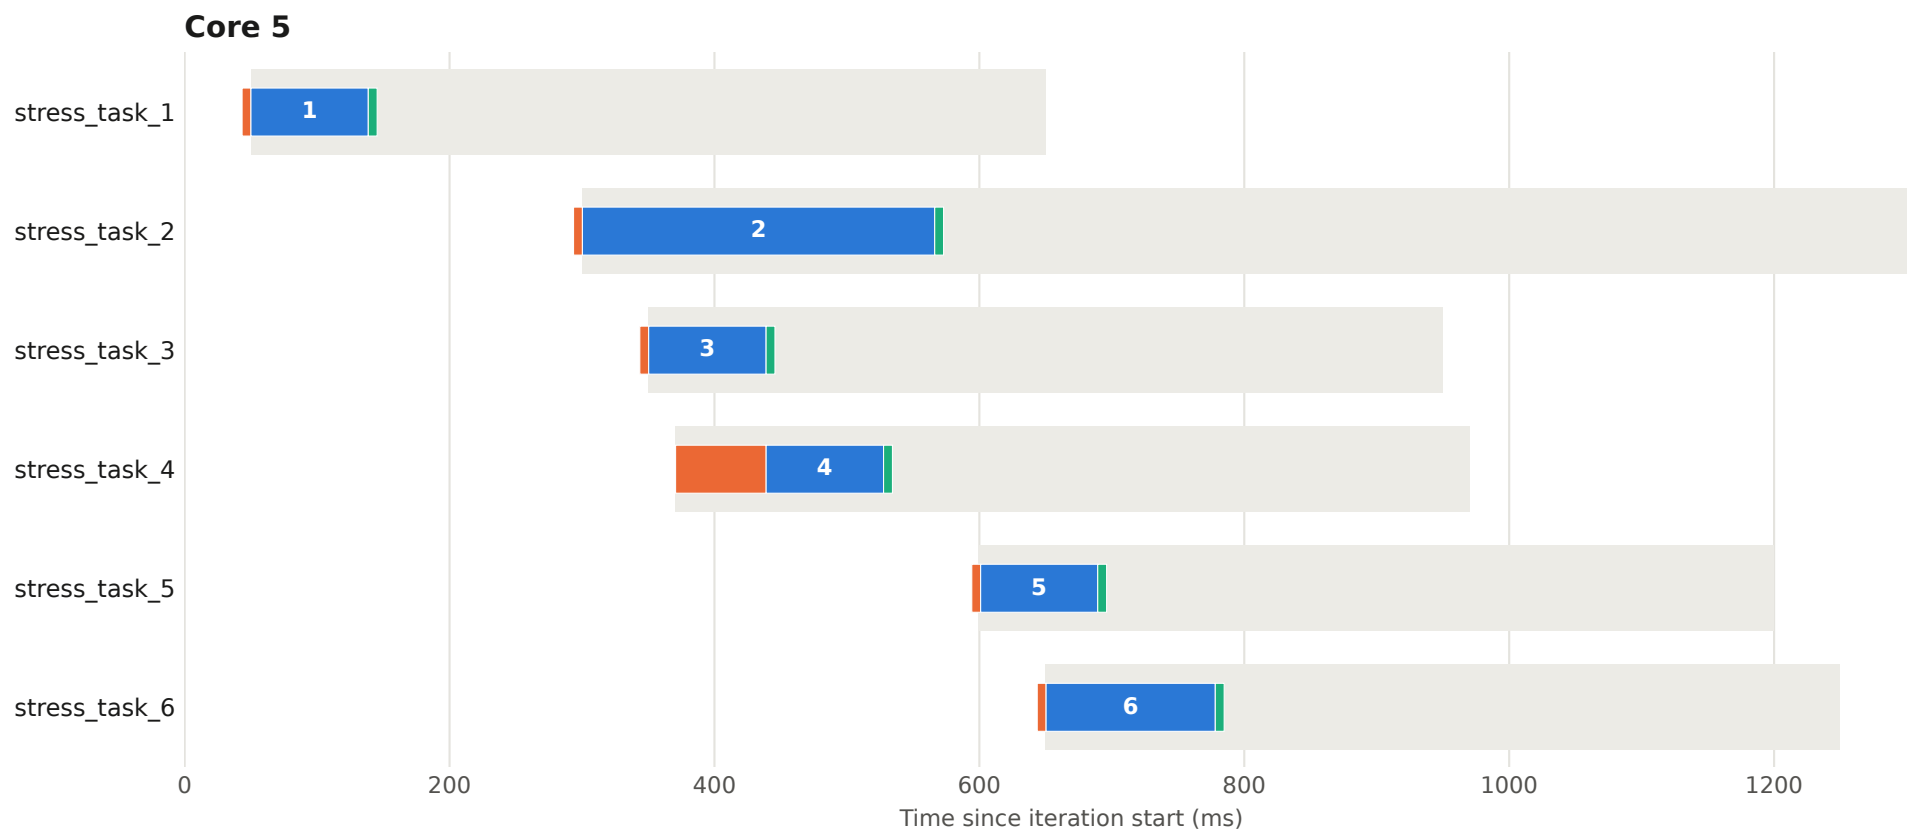


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 29 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

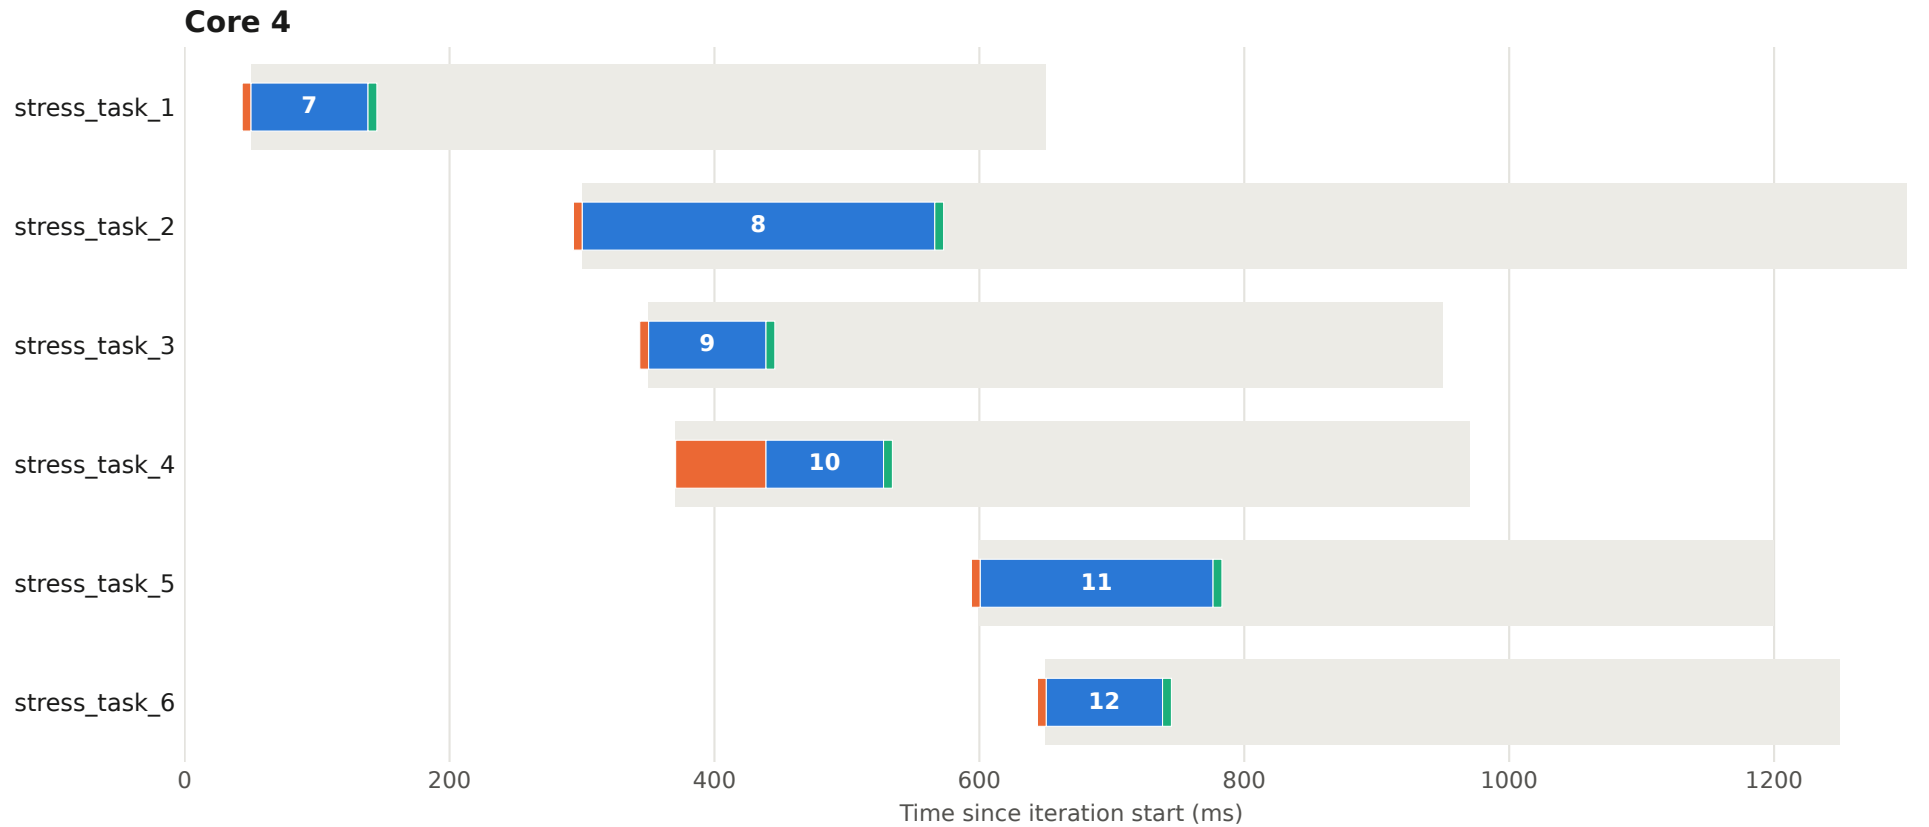


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 29 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

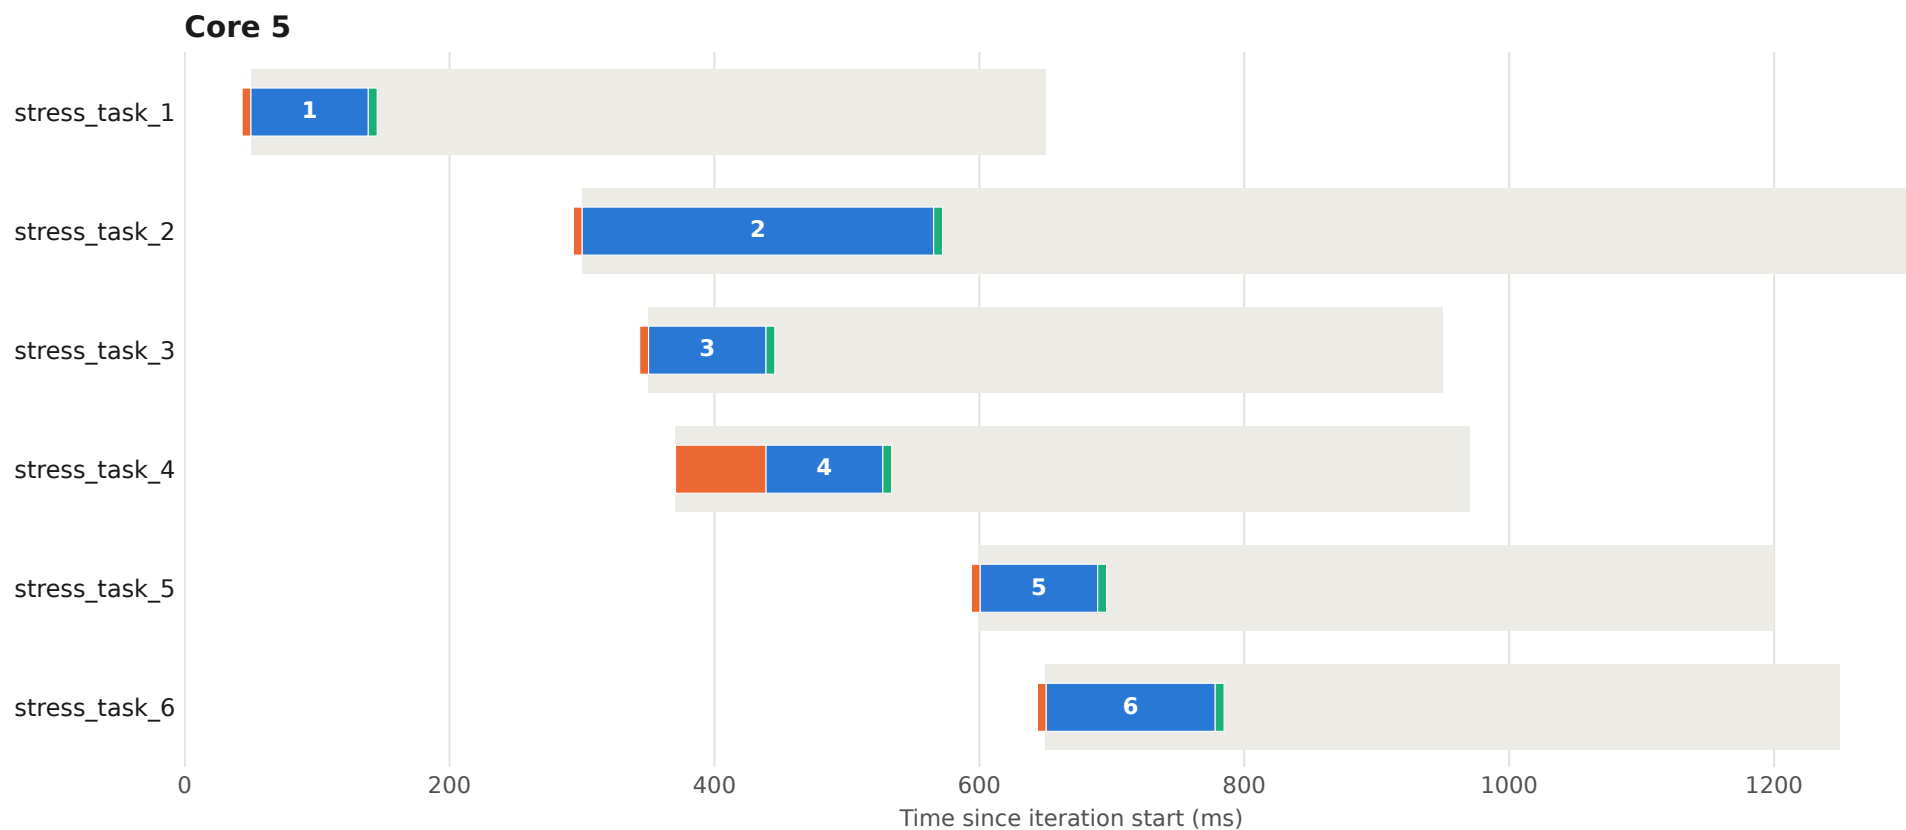


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 30 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

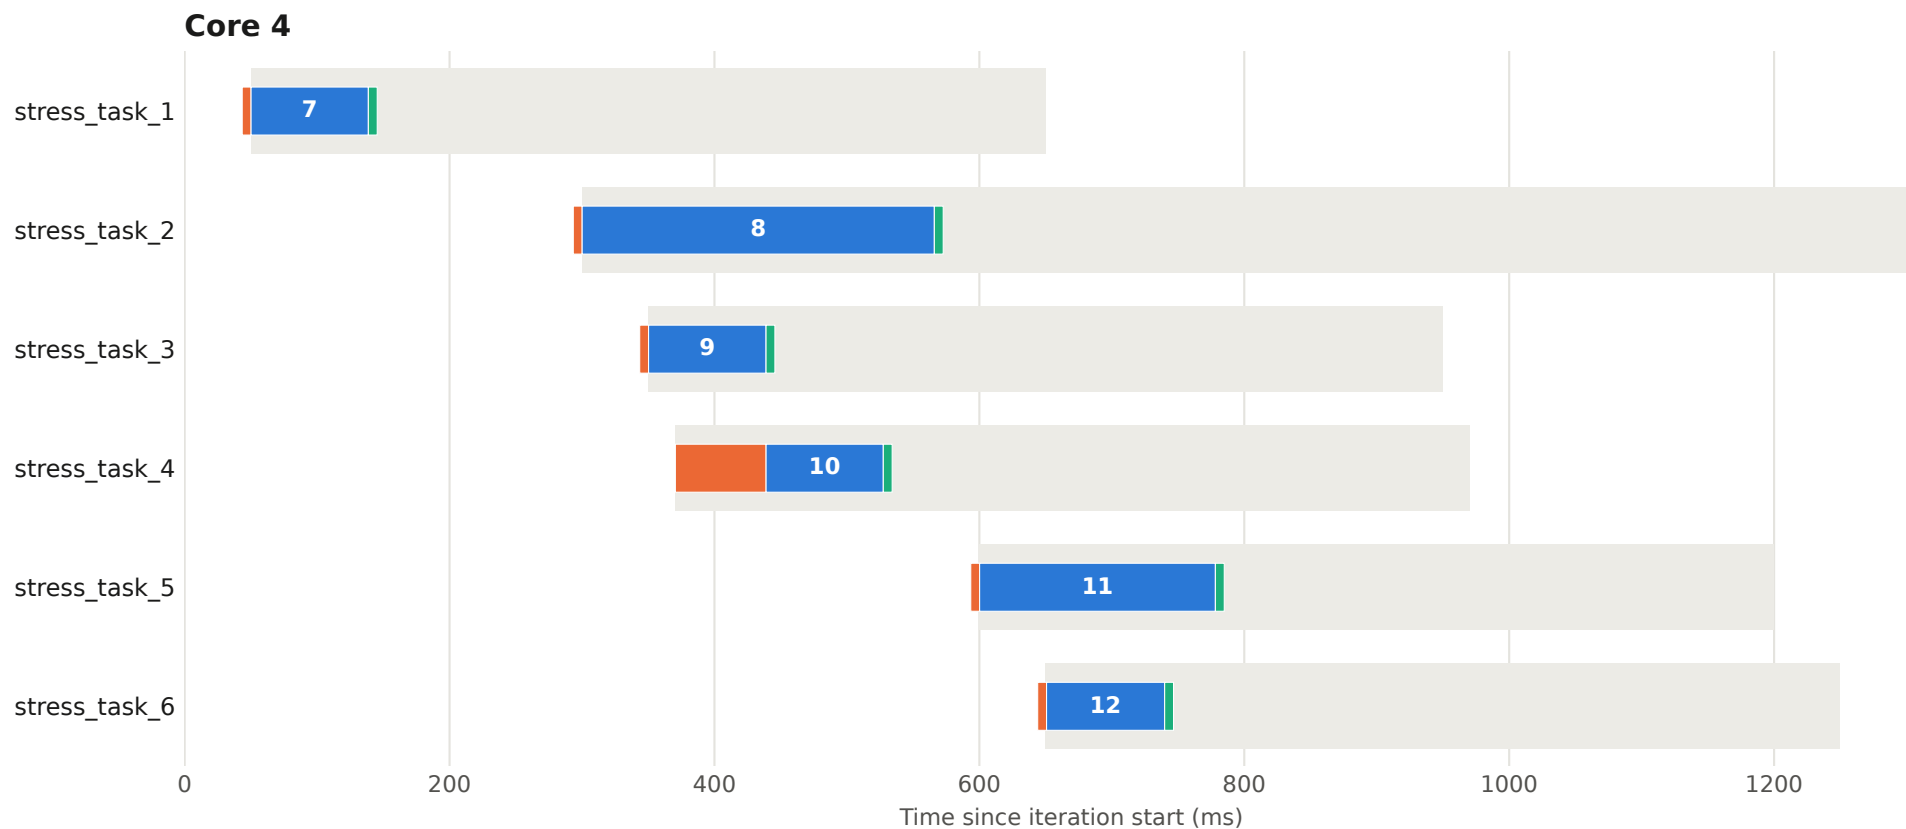


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 30 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

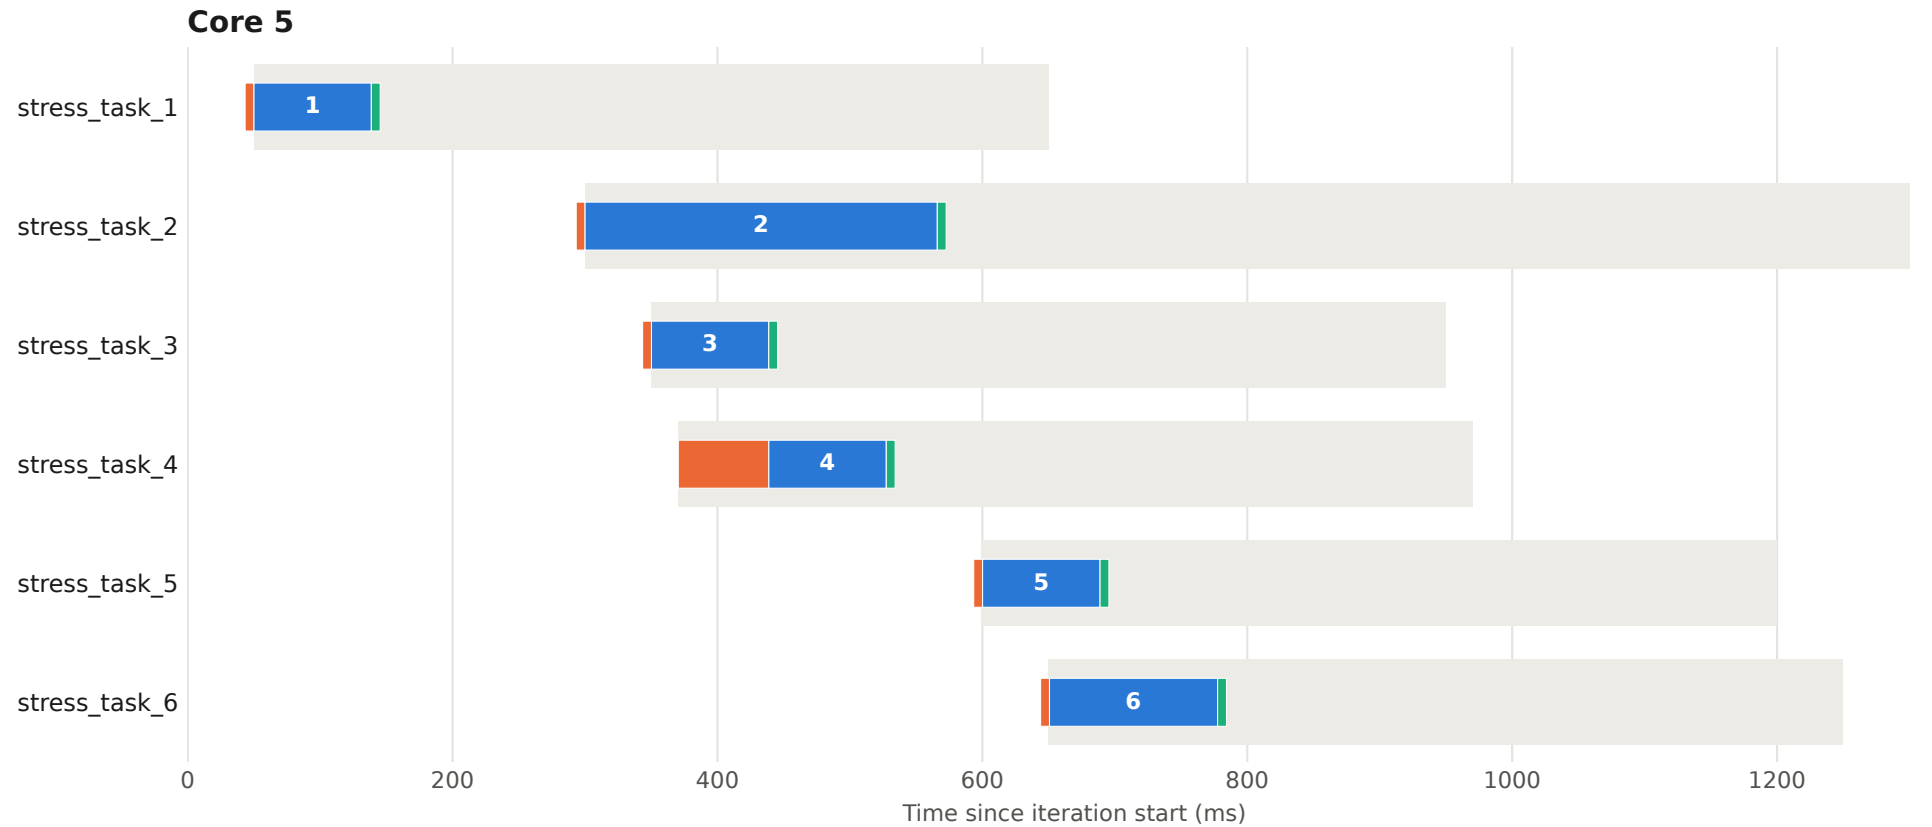


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 31 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

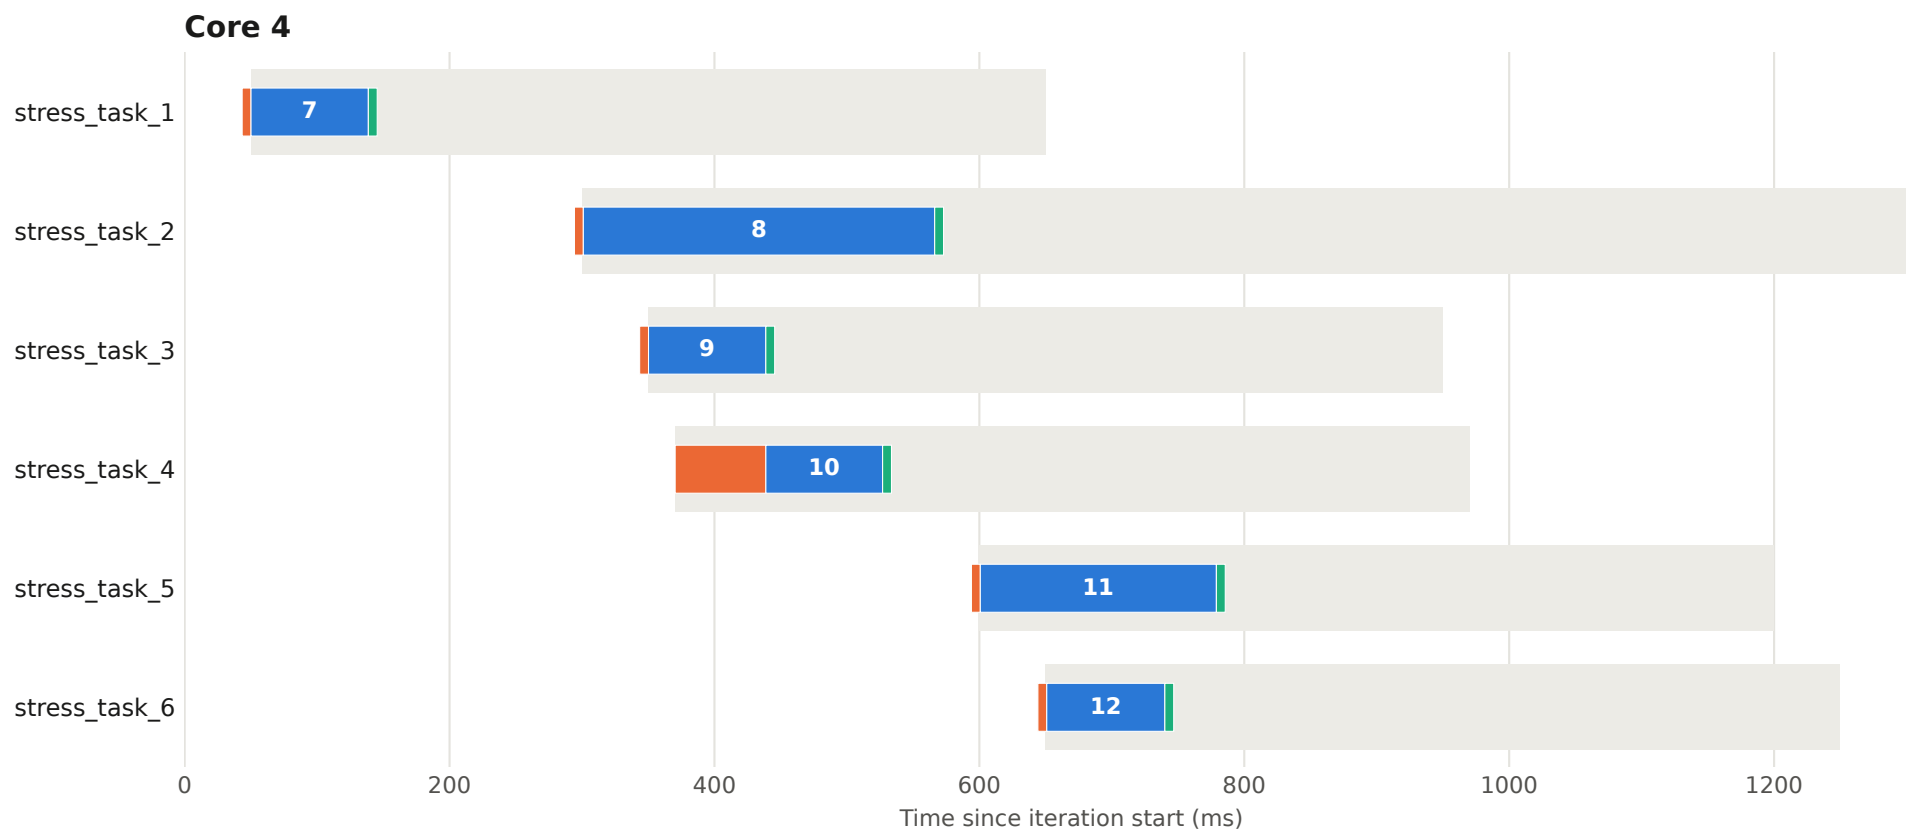


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 31 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

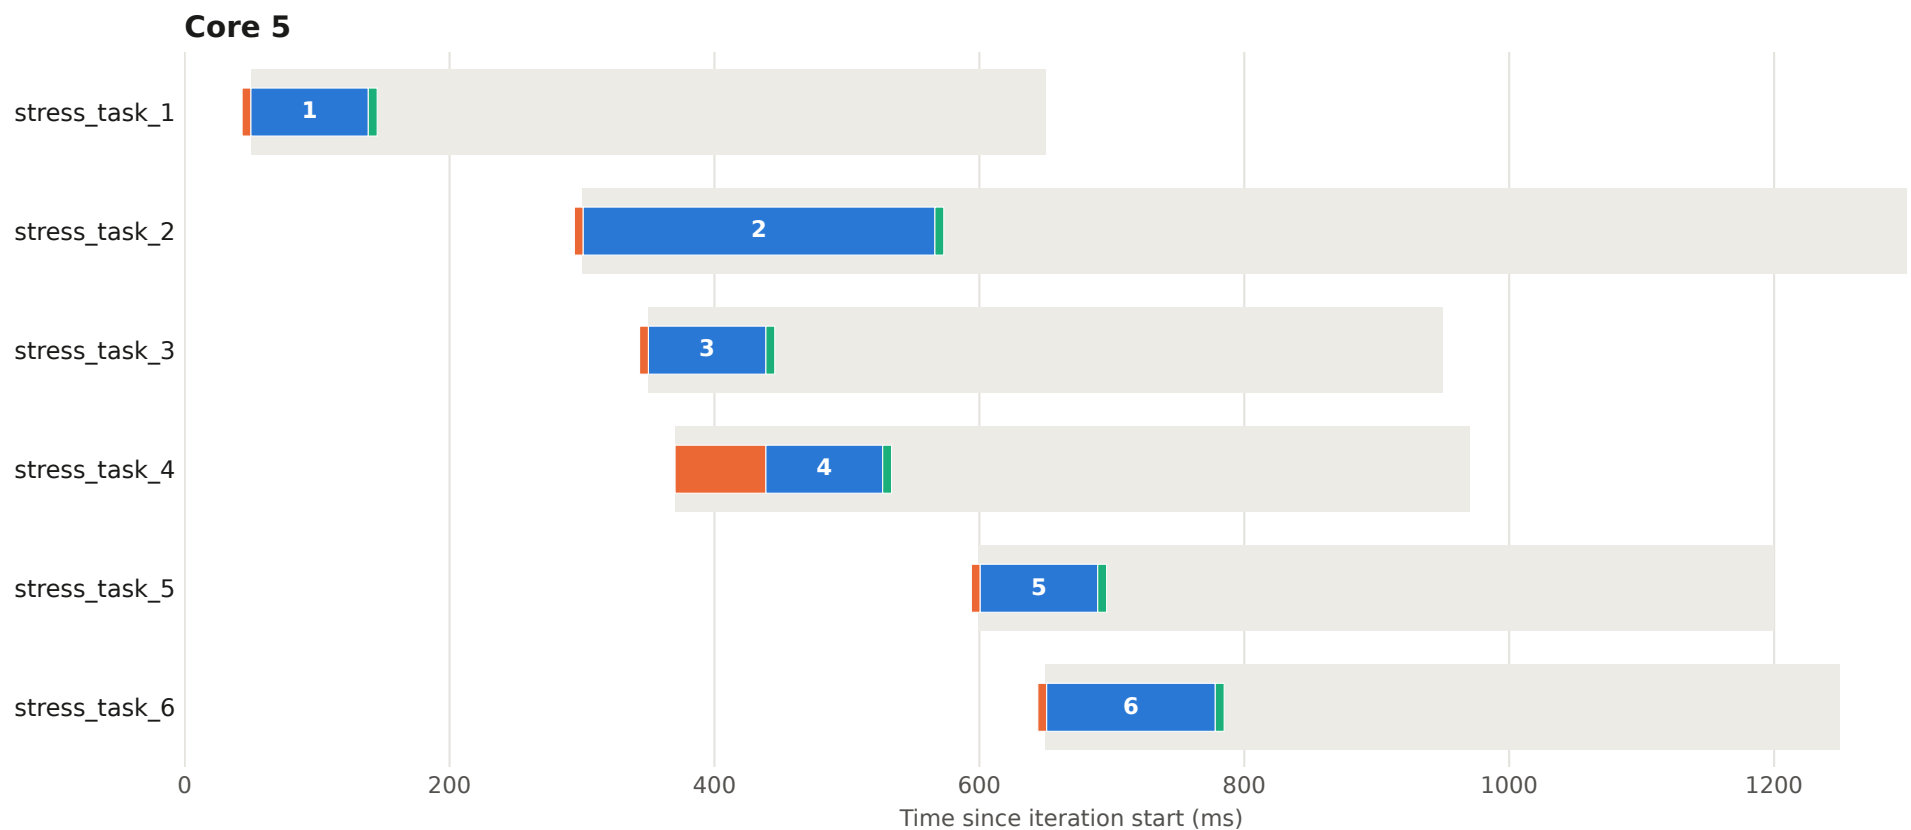


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 32 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

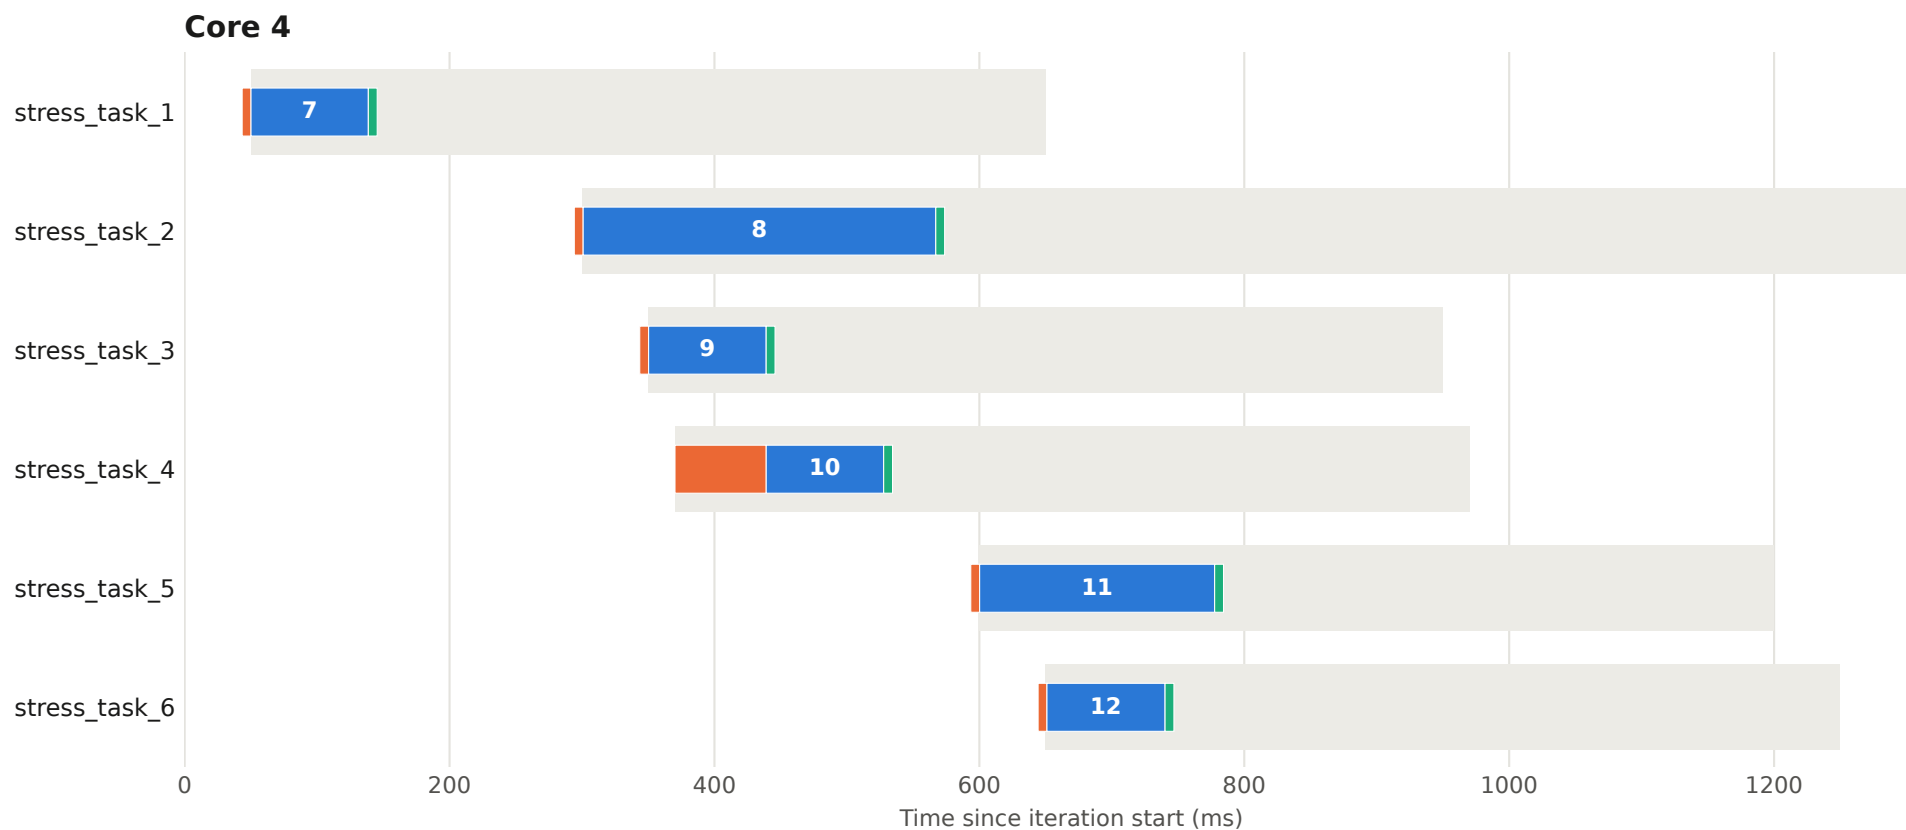


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 32 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

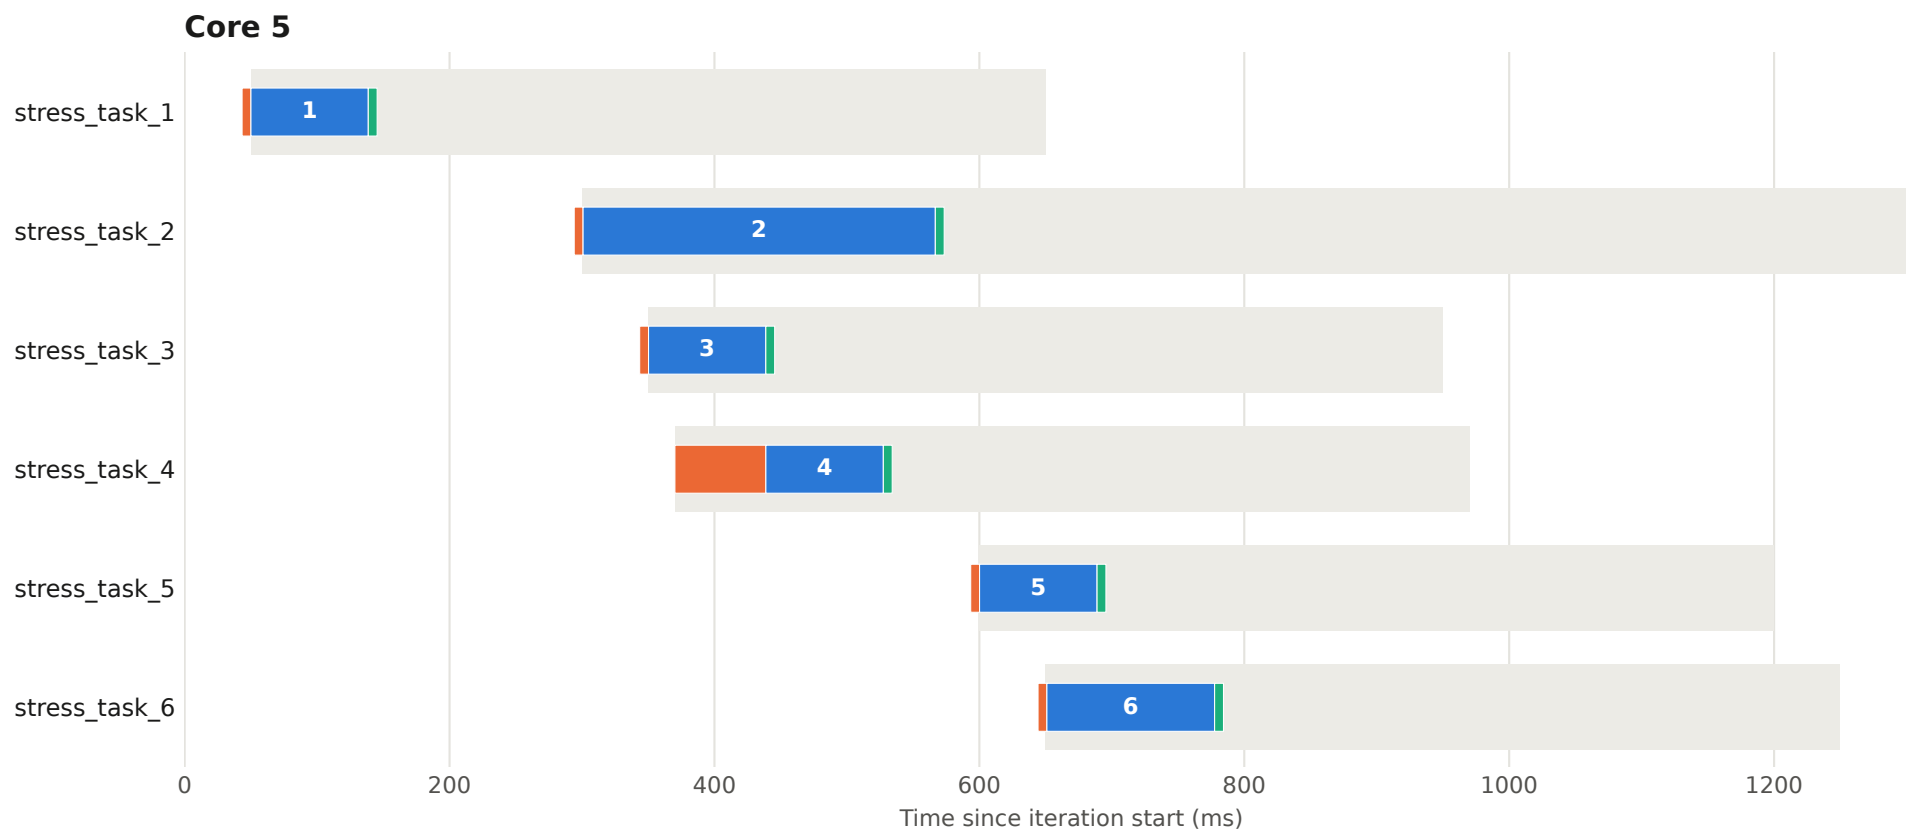


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 33 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

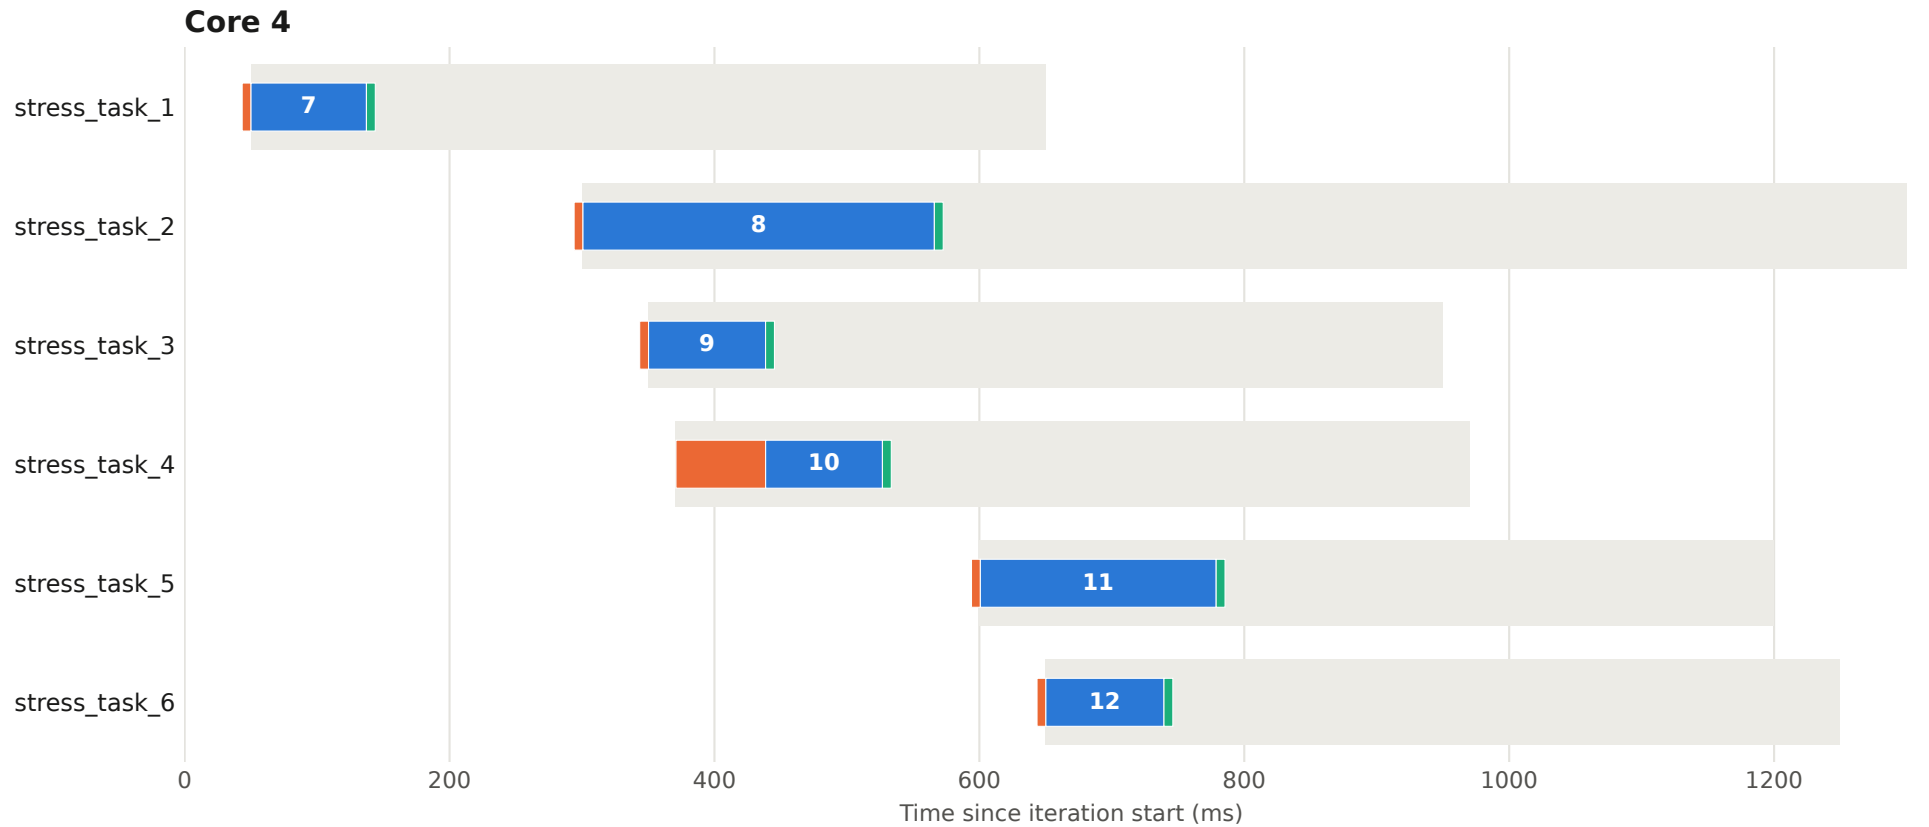


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 33 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

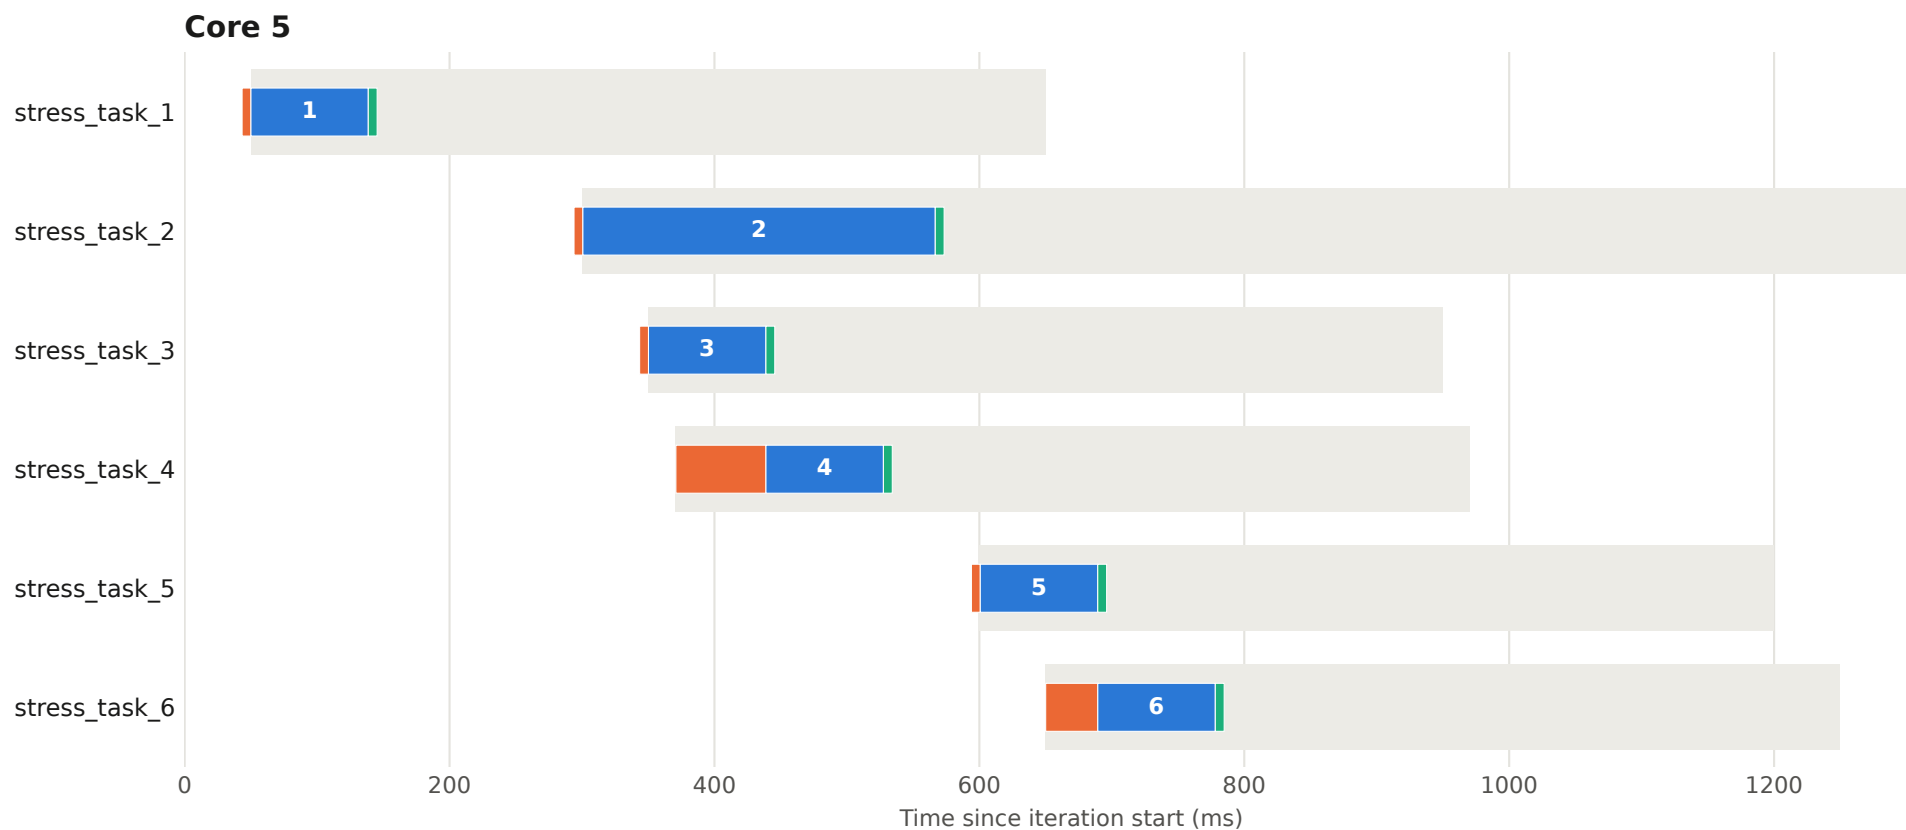


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 34 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

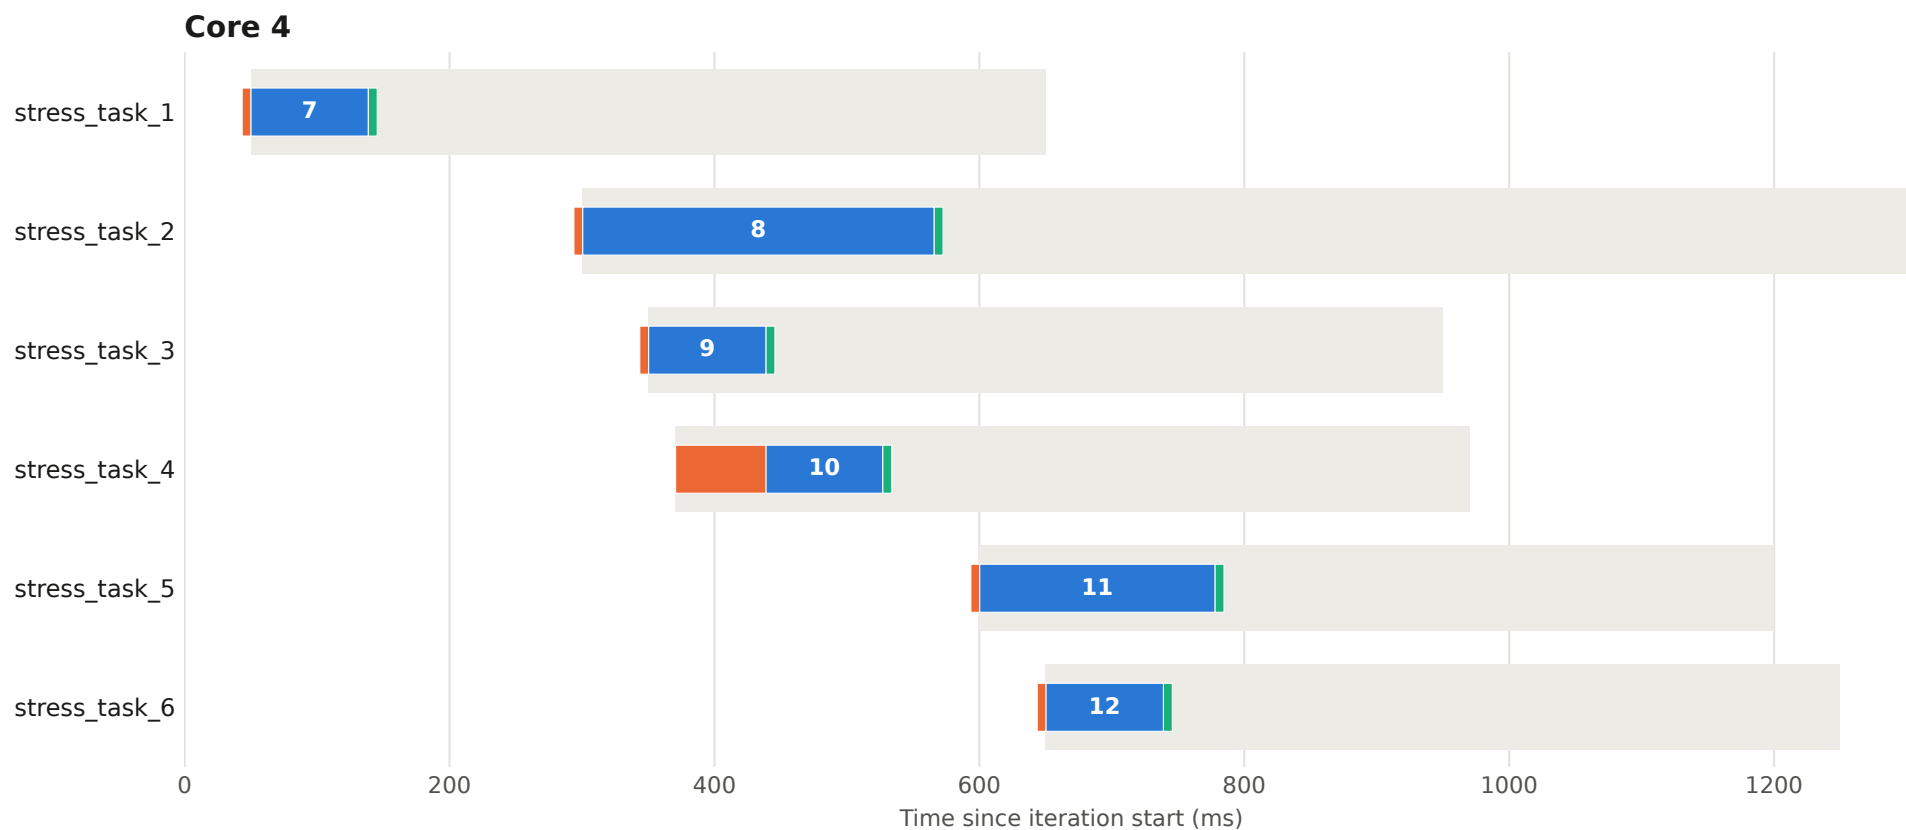


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 34 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

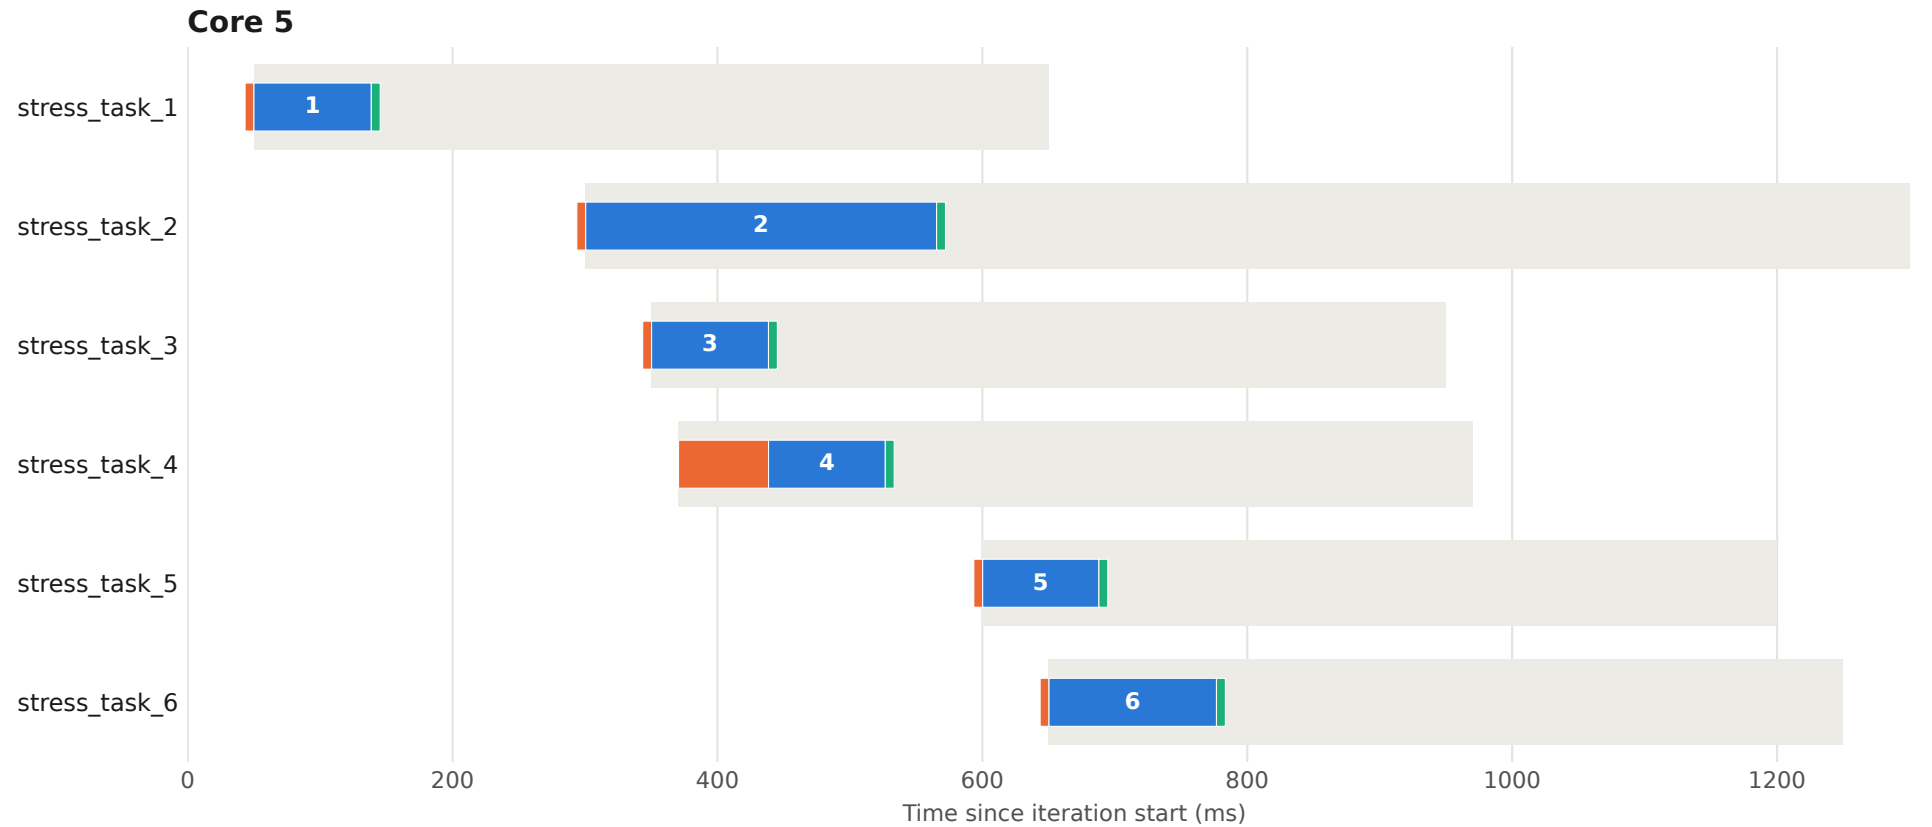


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 35 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

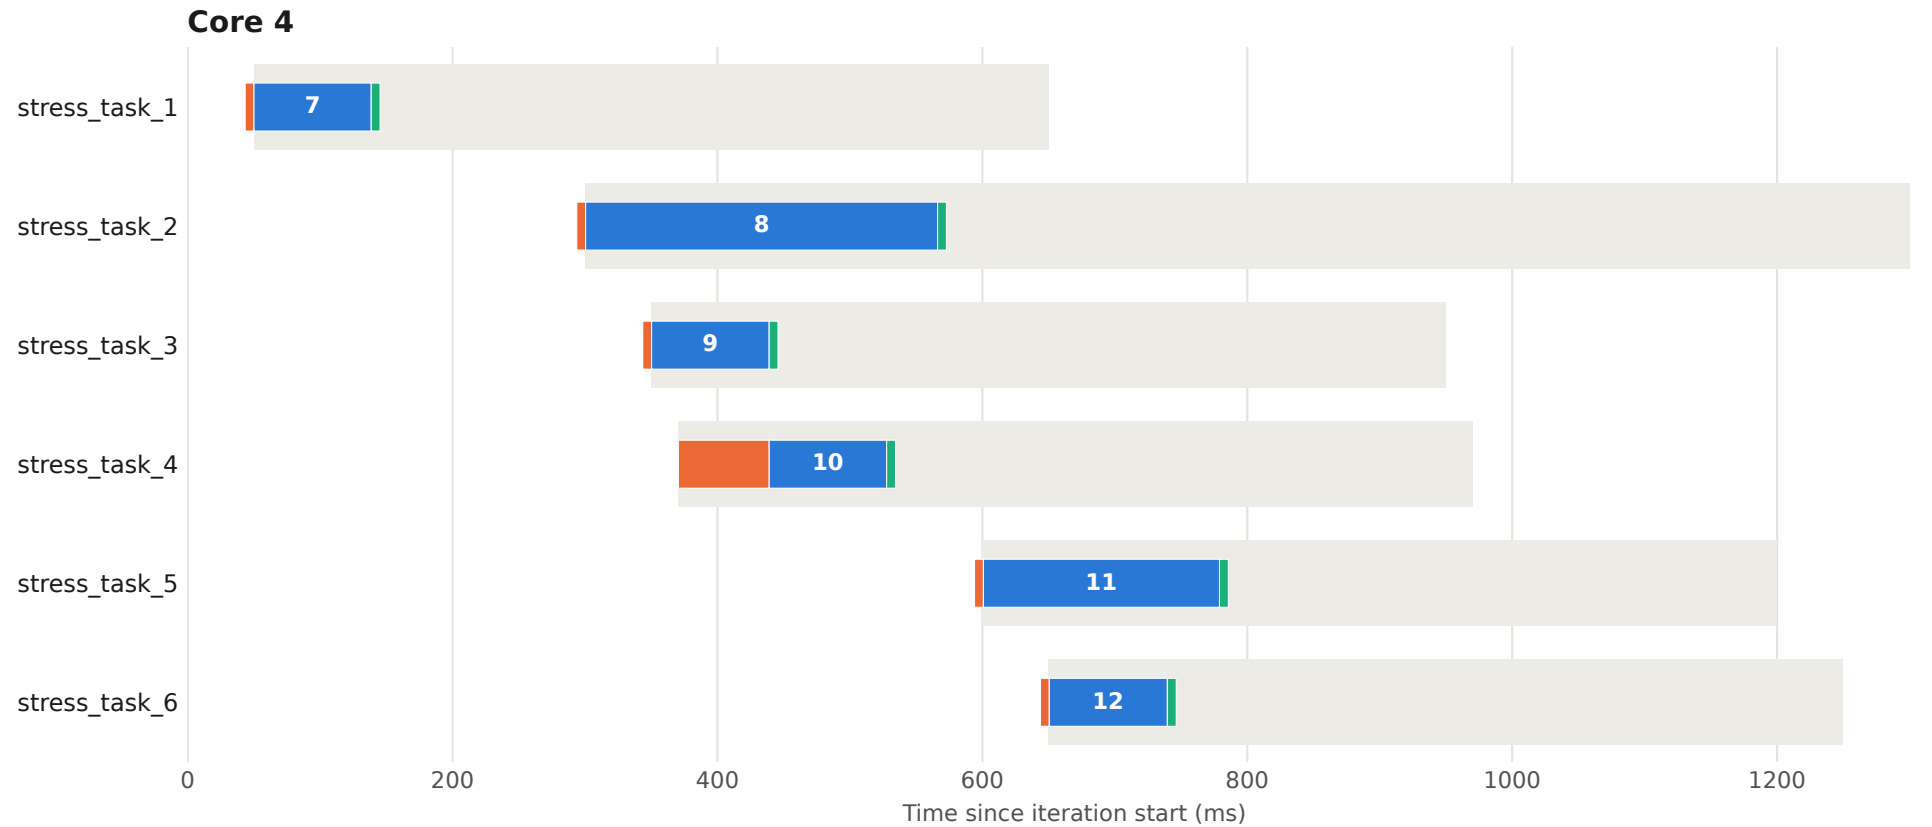


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 35 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

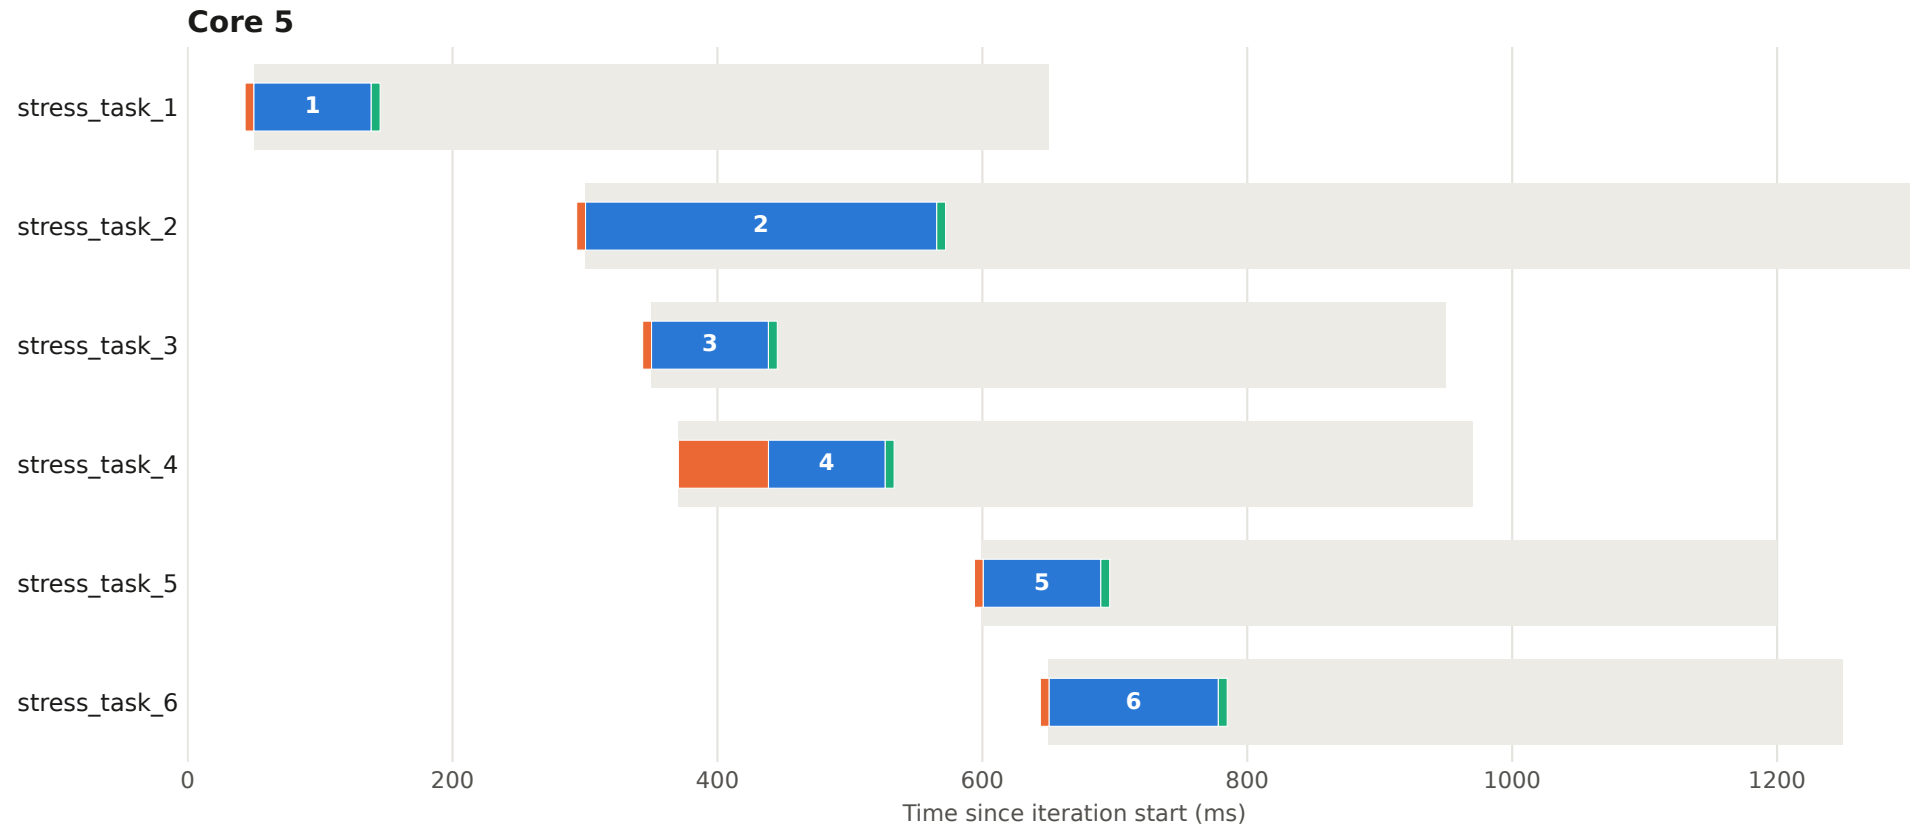


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 36 - core 4

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

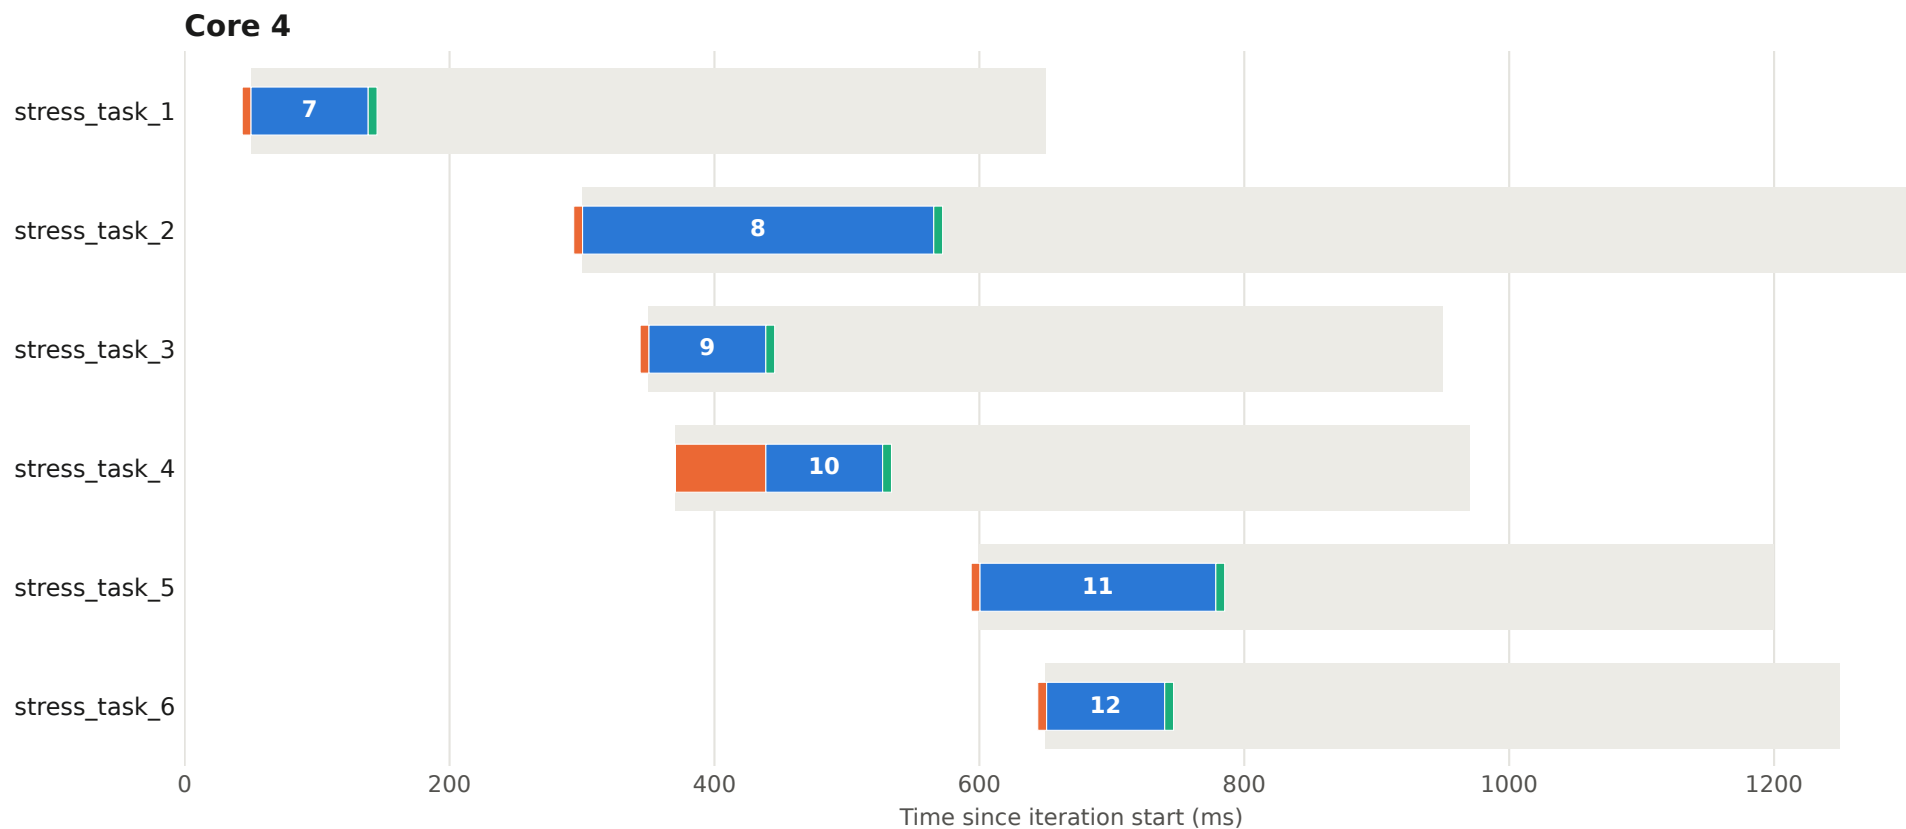

Execution plan - iteration 36 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

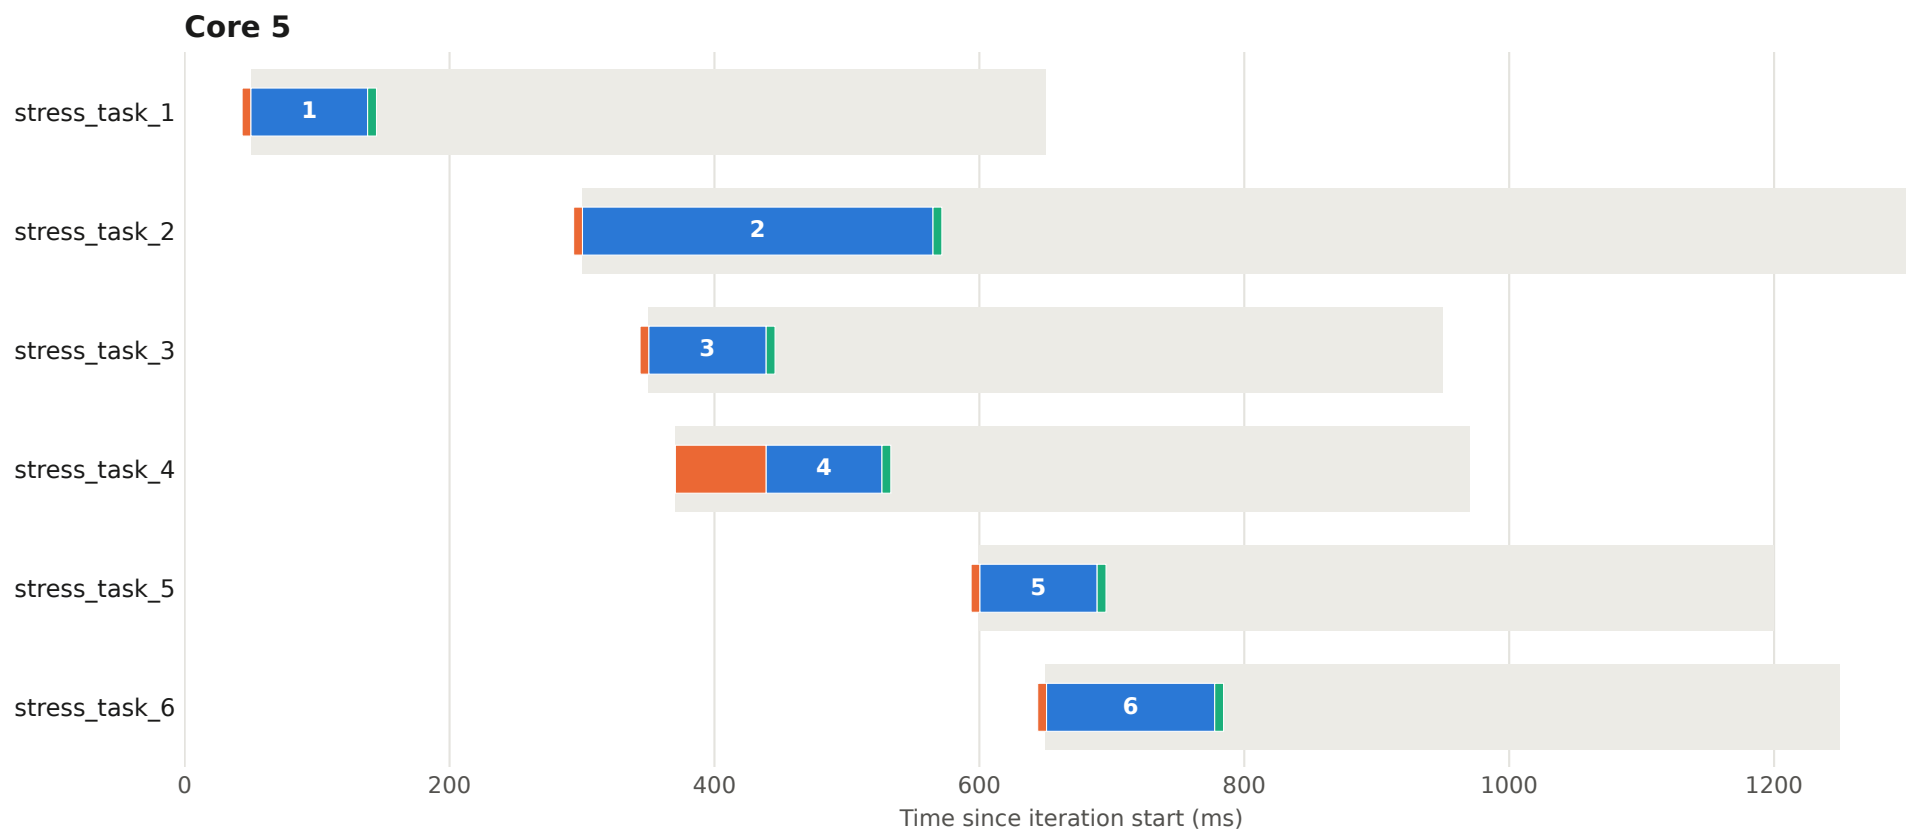


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 37 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

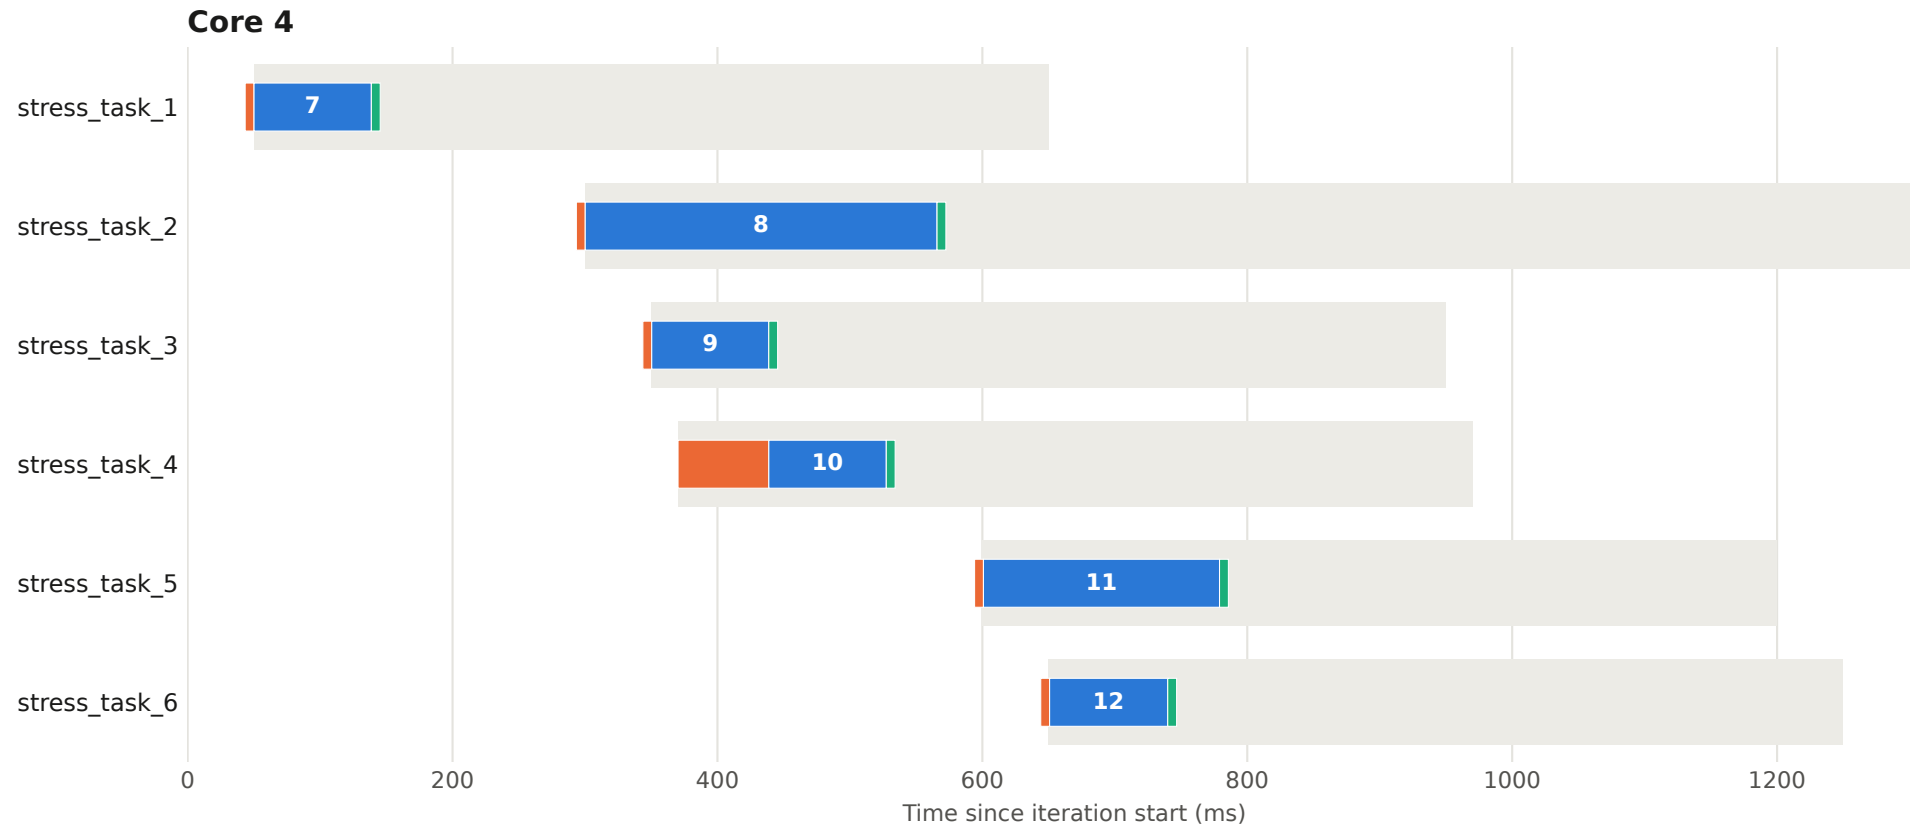


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 37 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

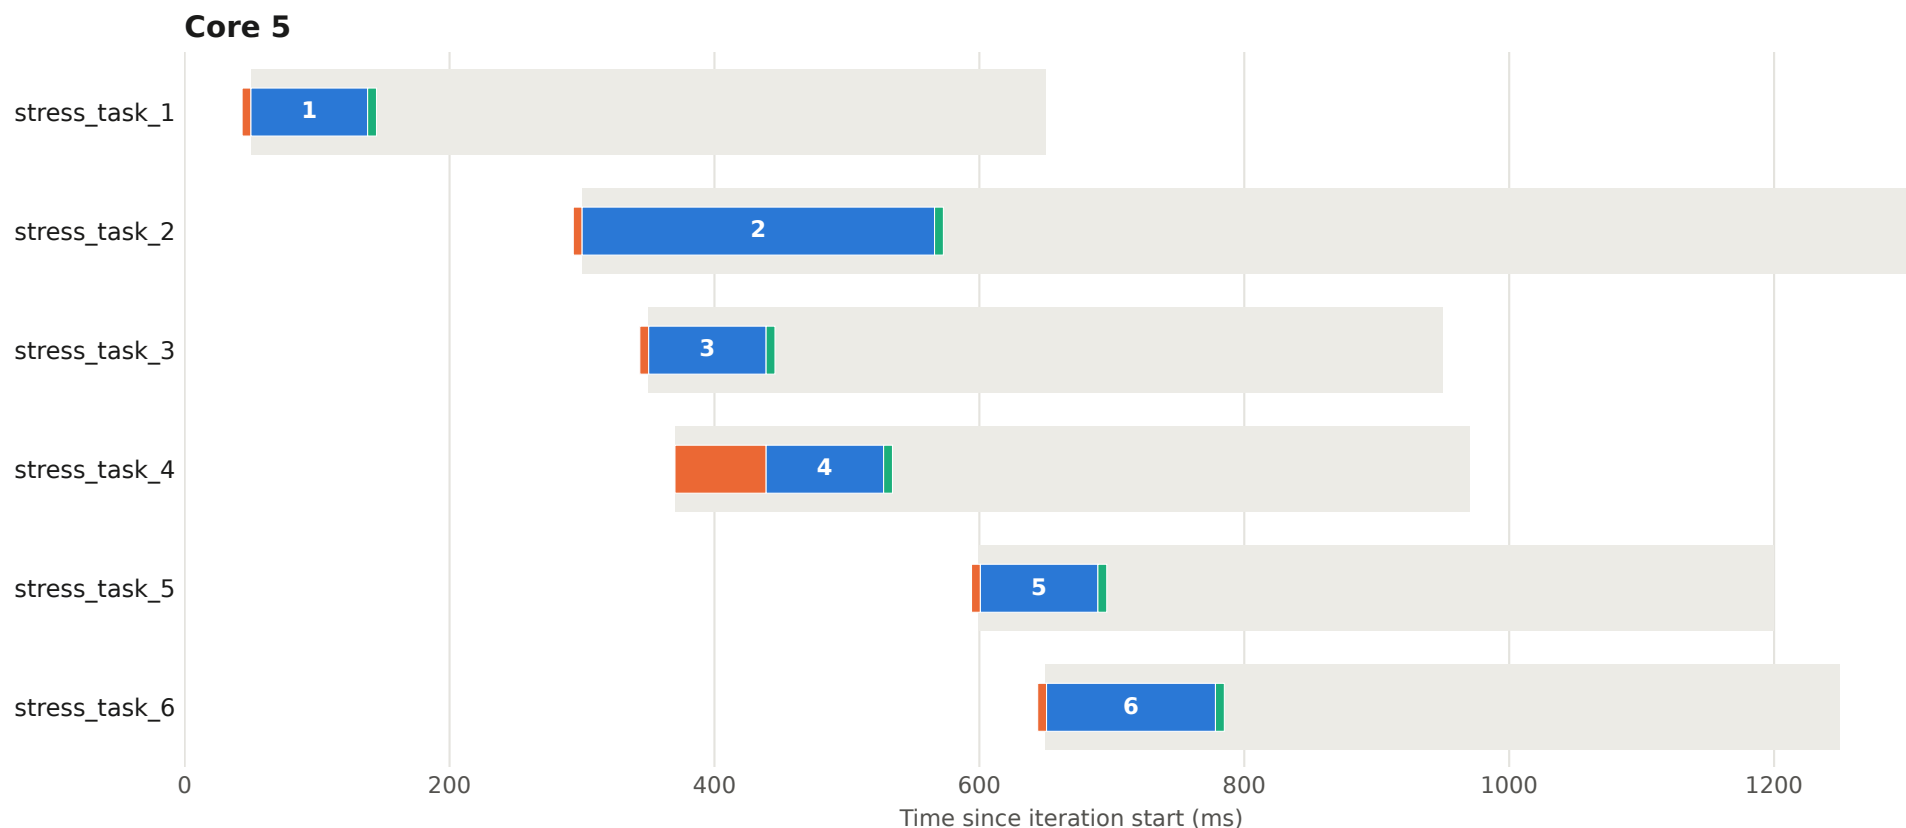


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 38 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

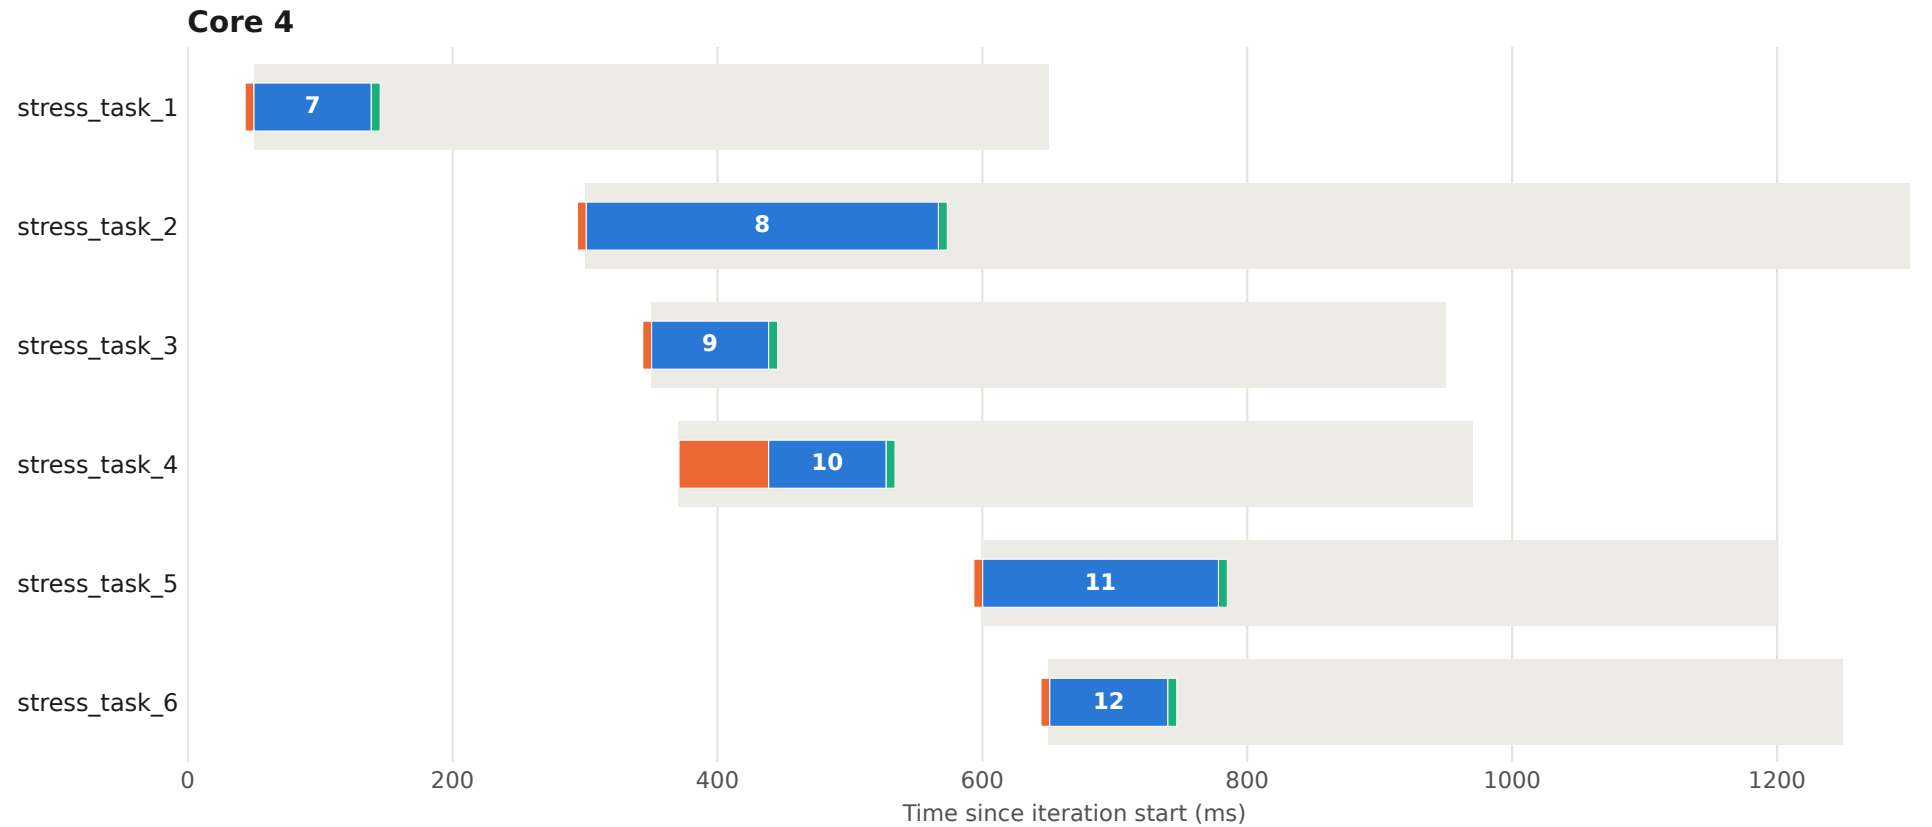


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 38 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

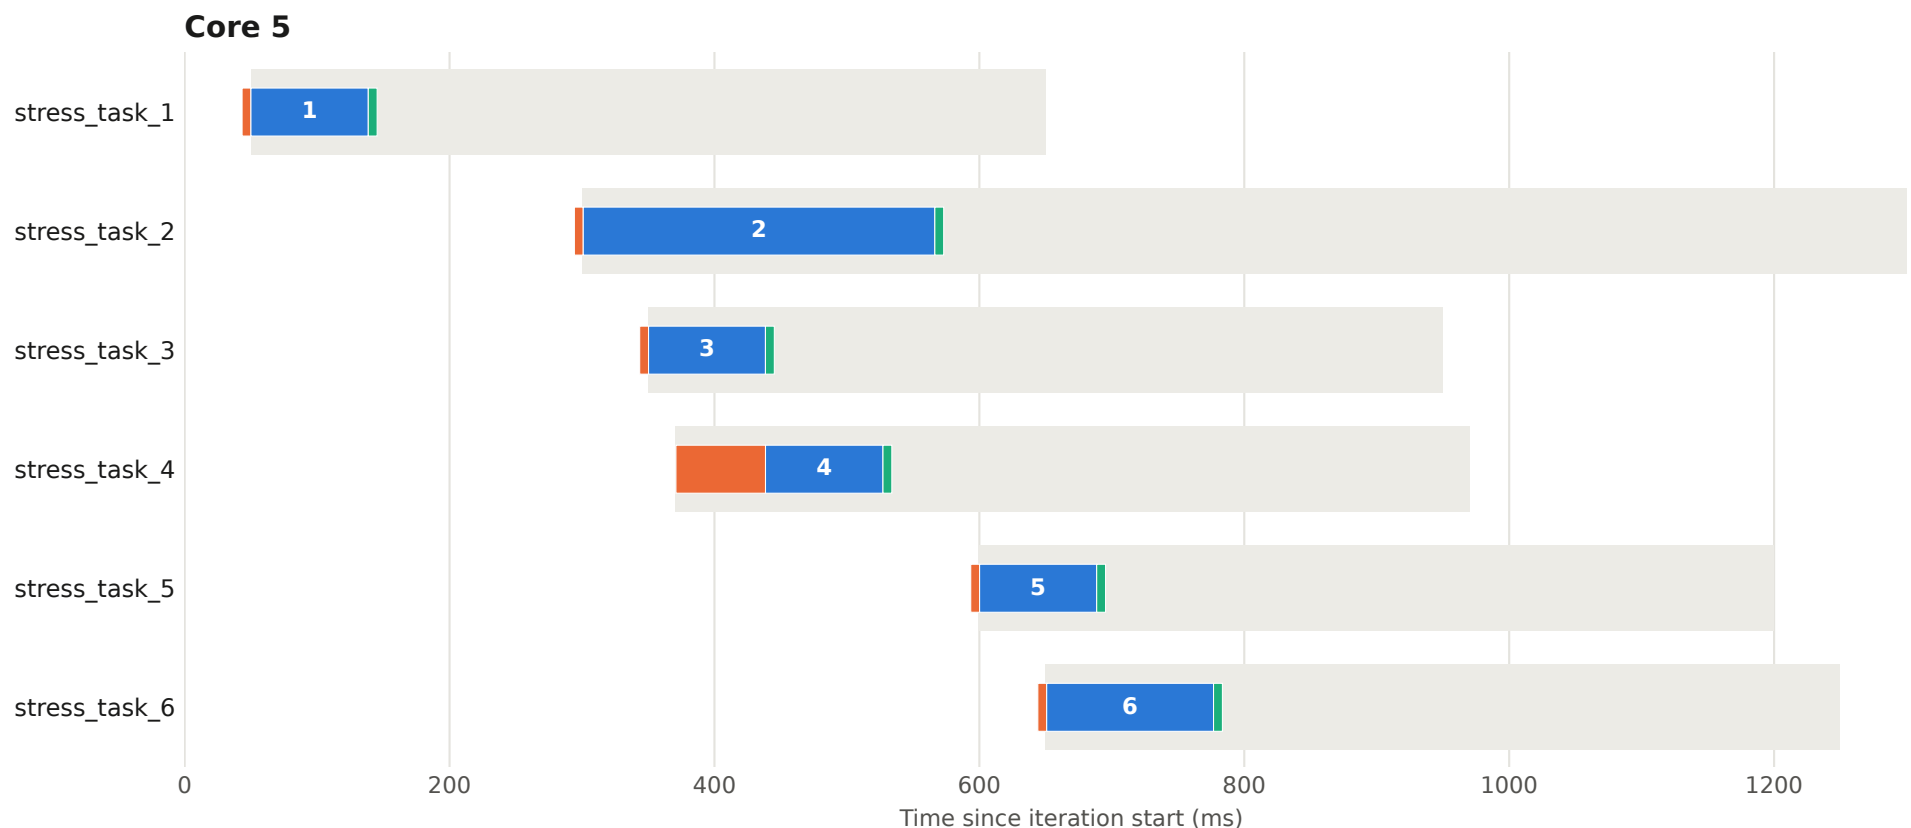


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 39 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

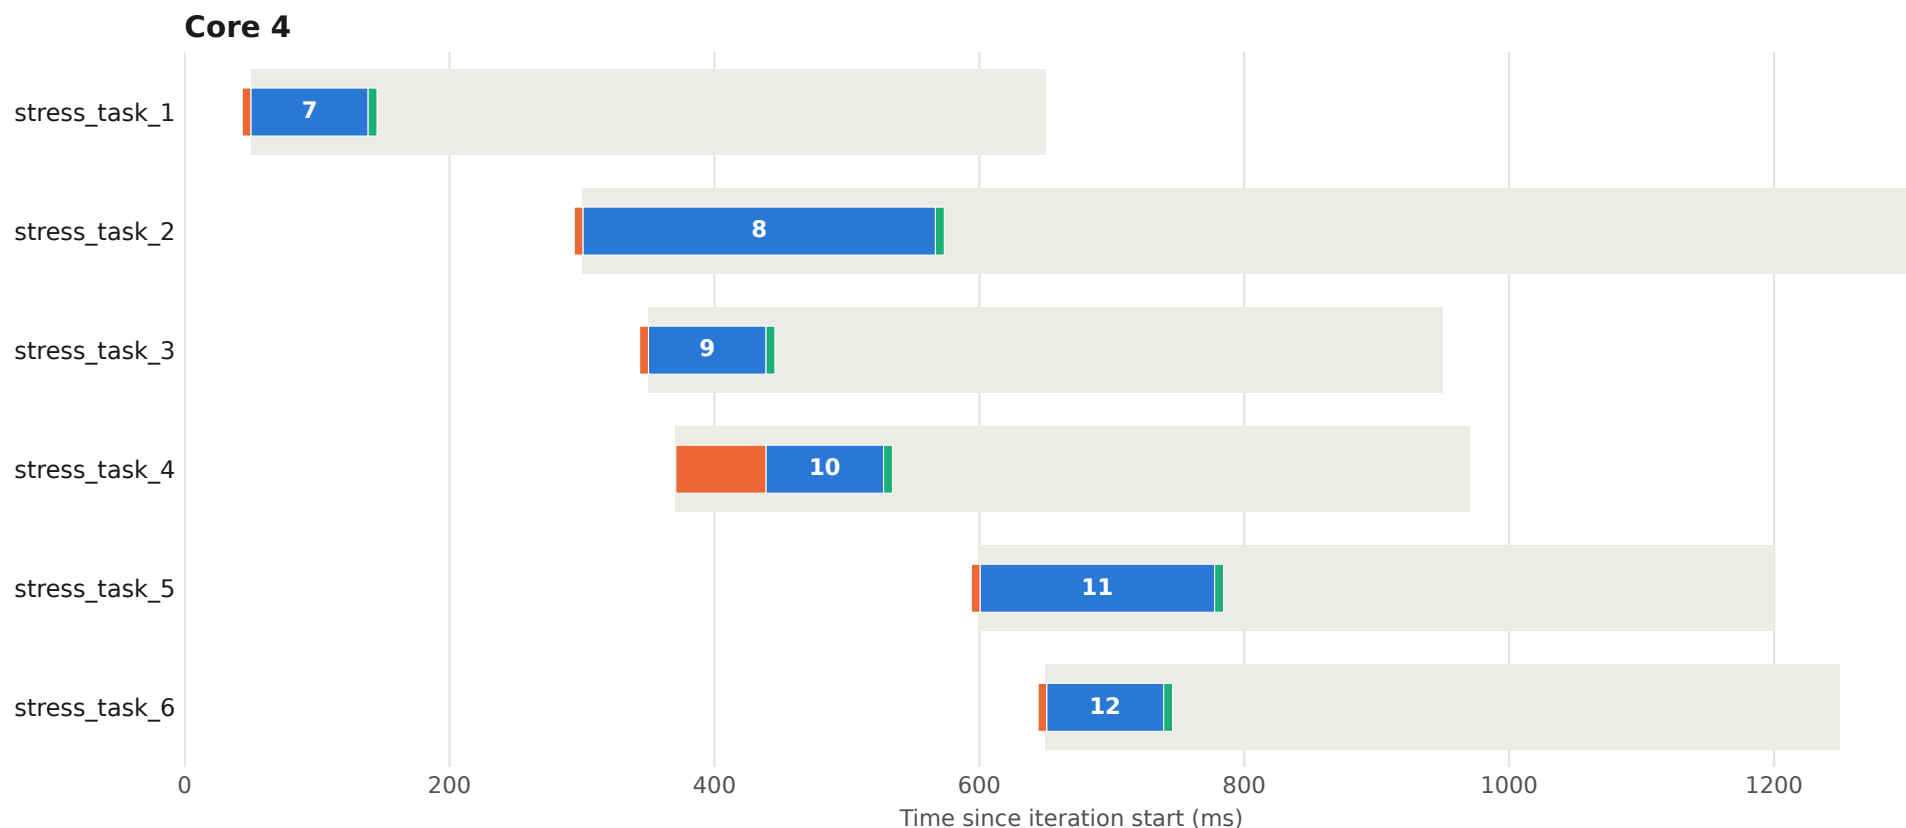


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 39 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

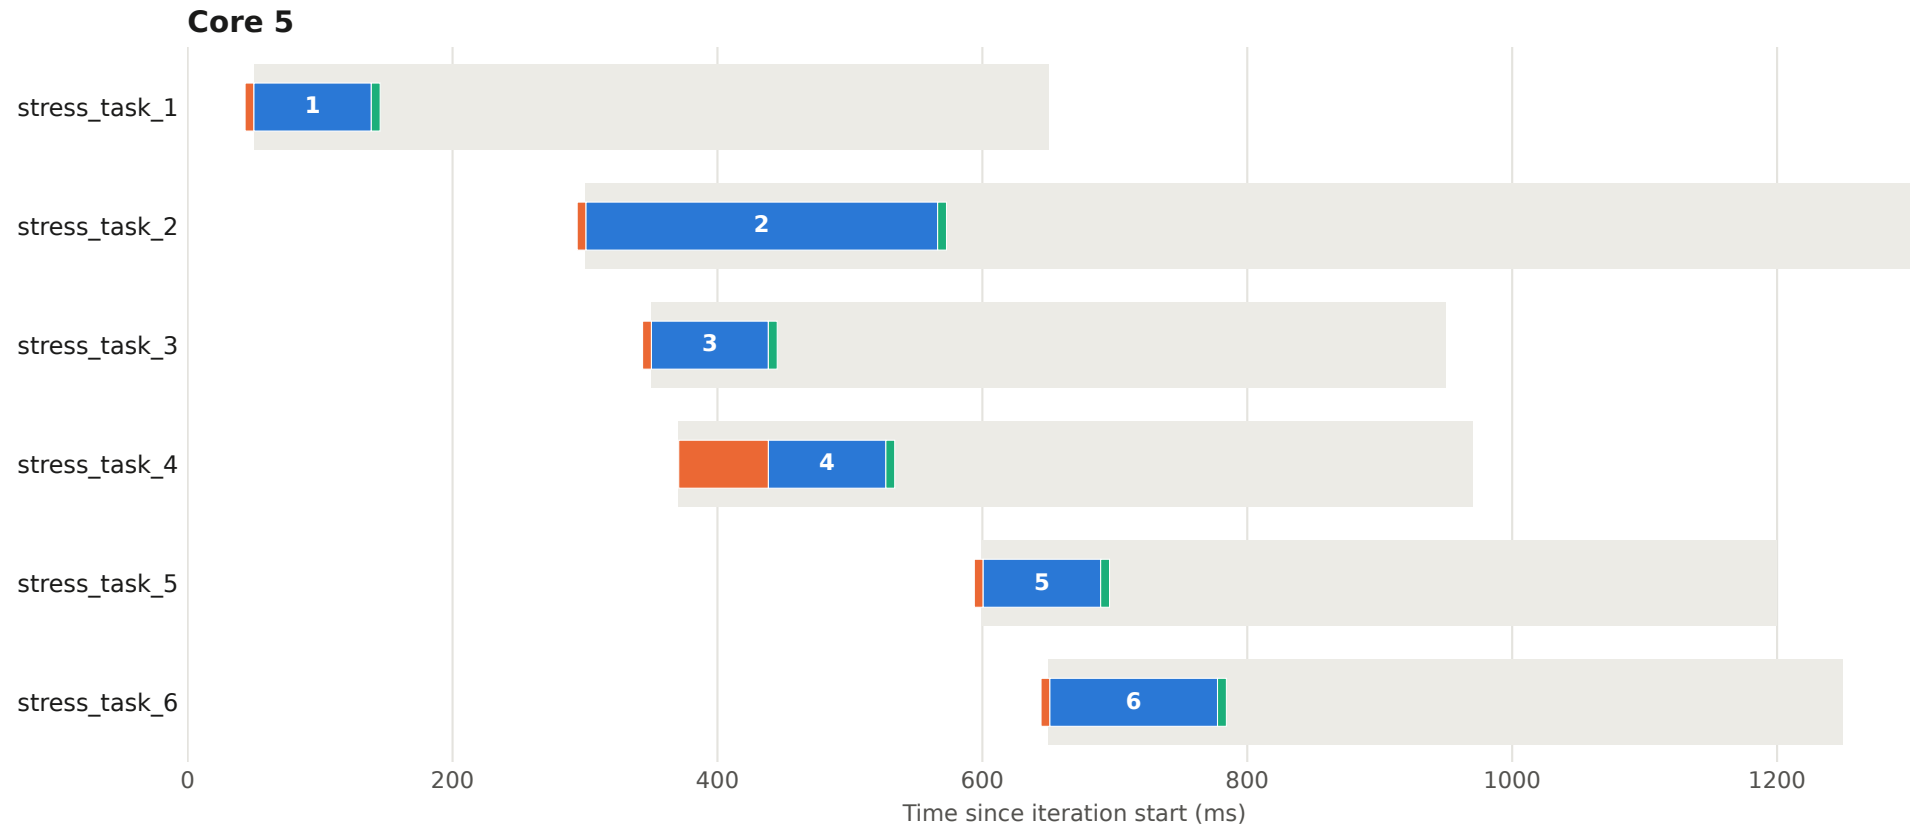


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 40 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

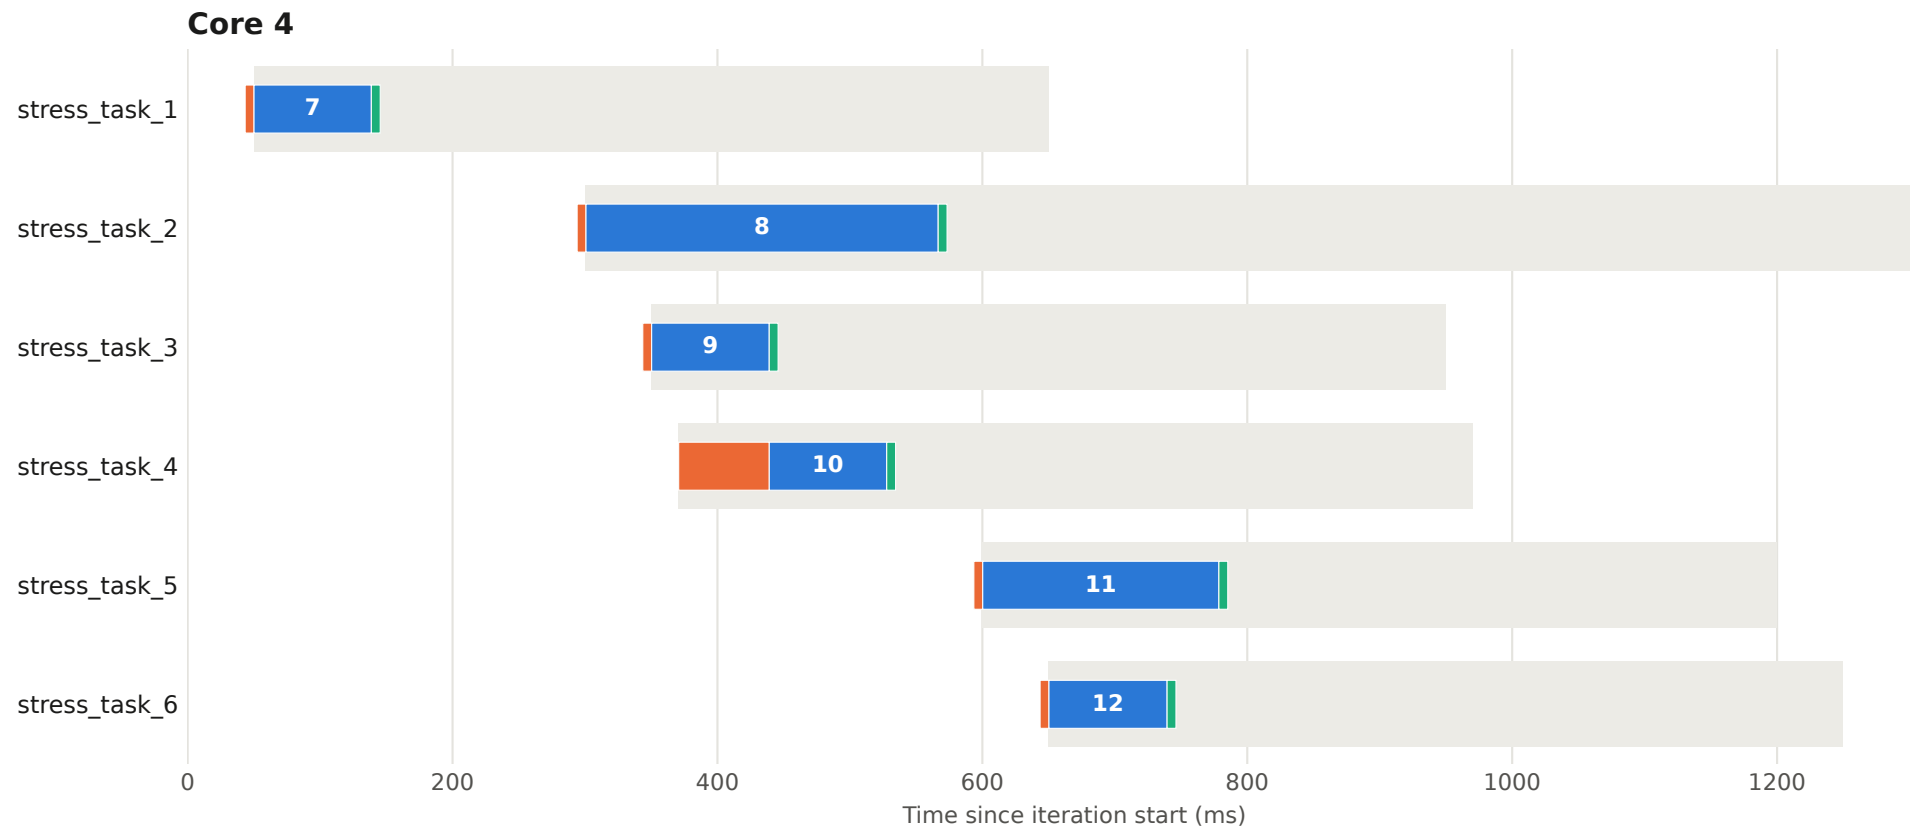


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 40 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

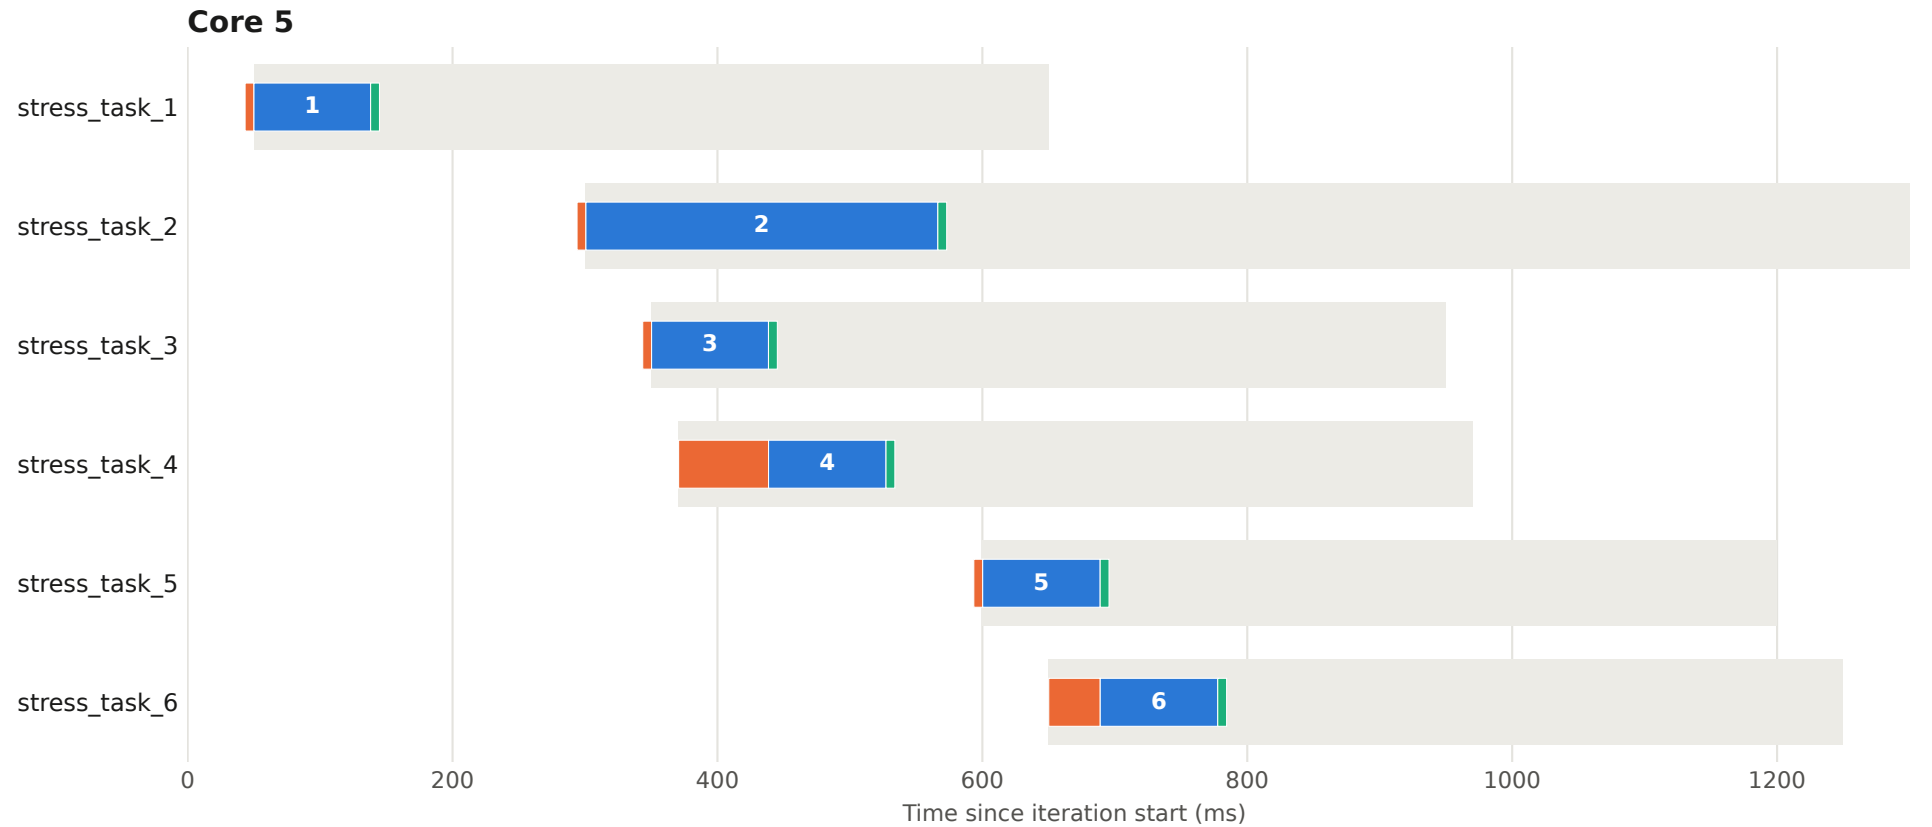


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 41 - core 4

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

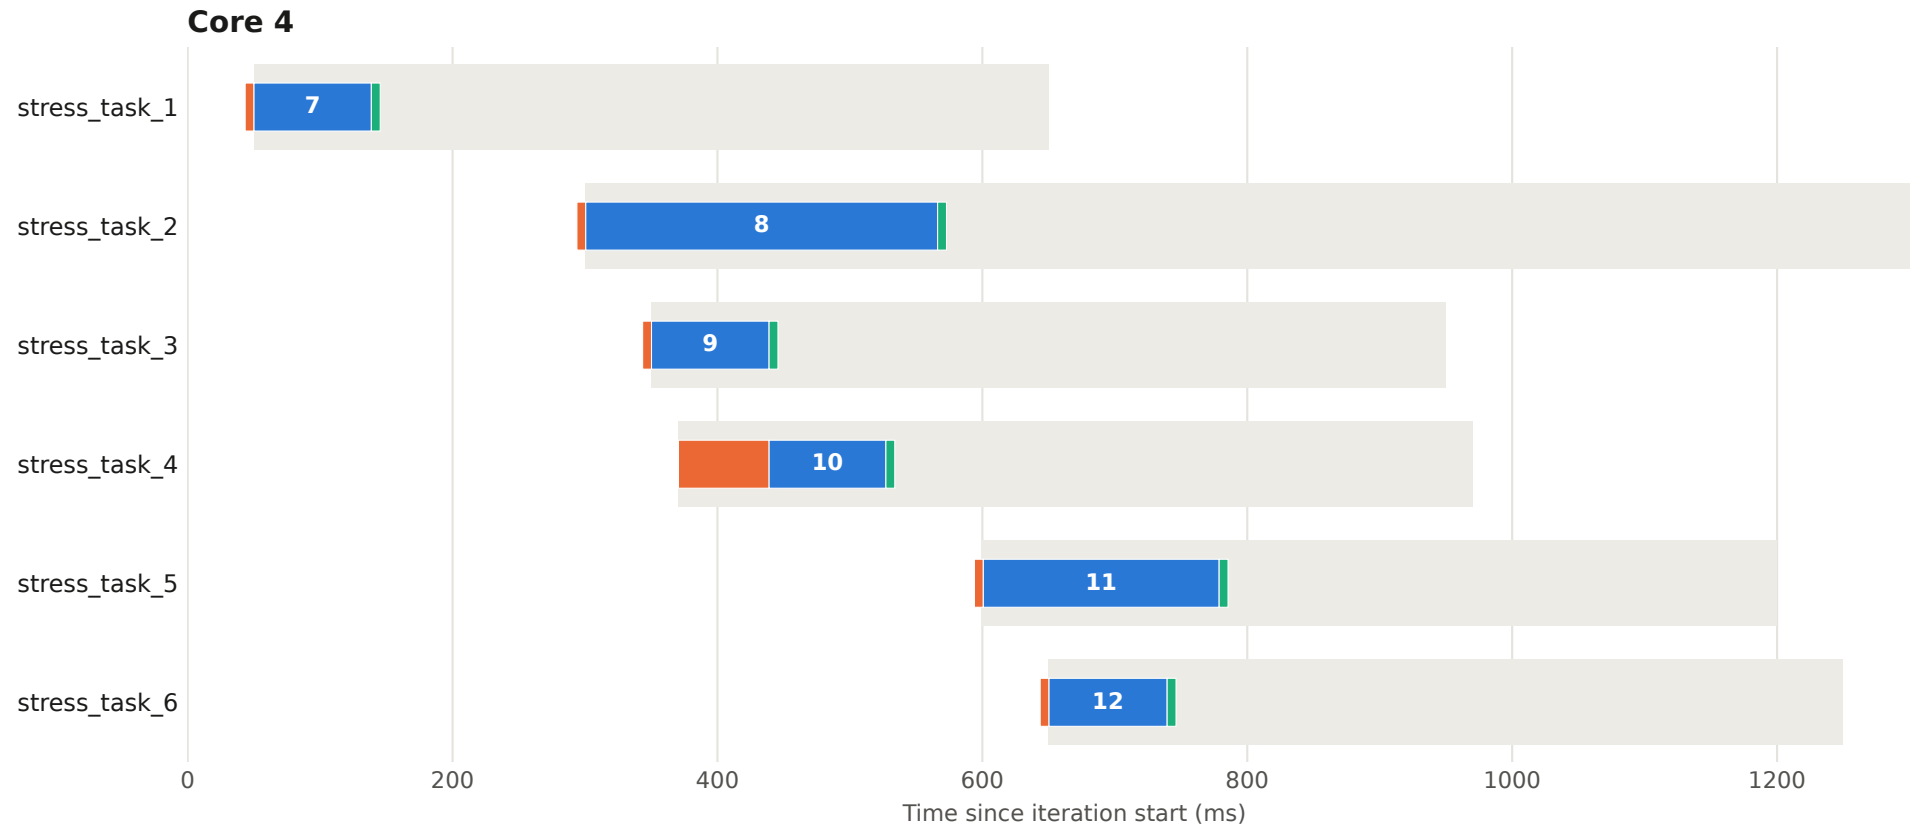

Execution plan - iteration 41 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

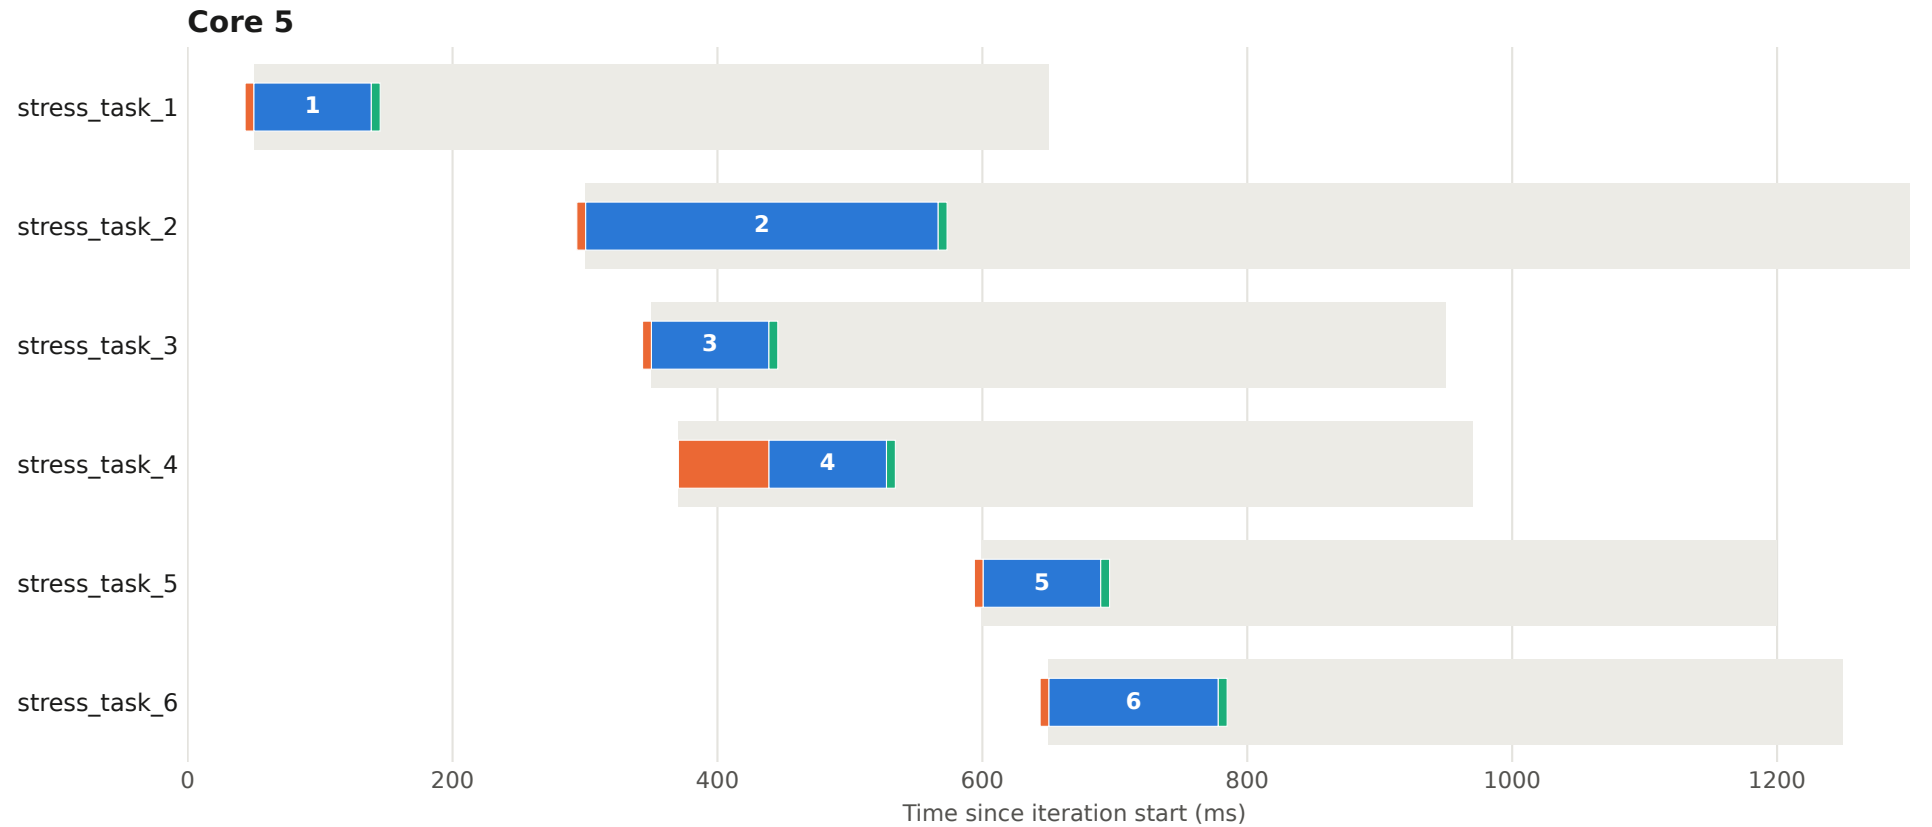


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 42 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

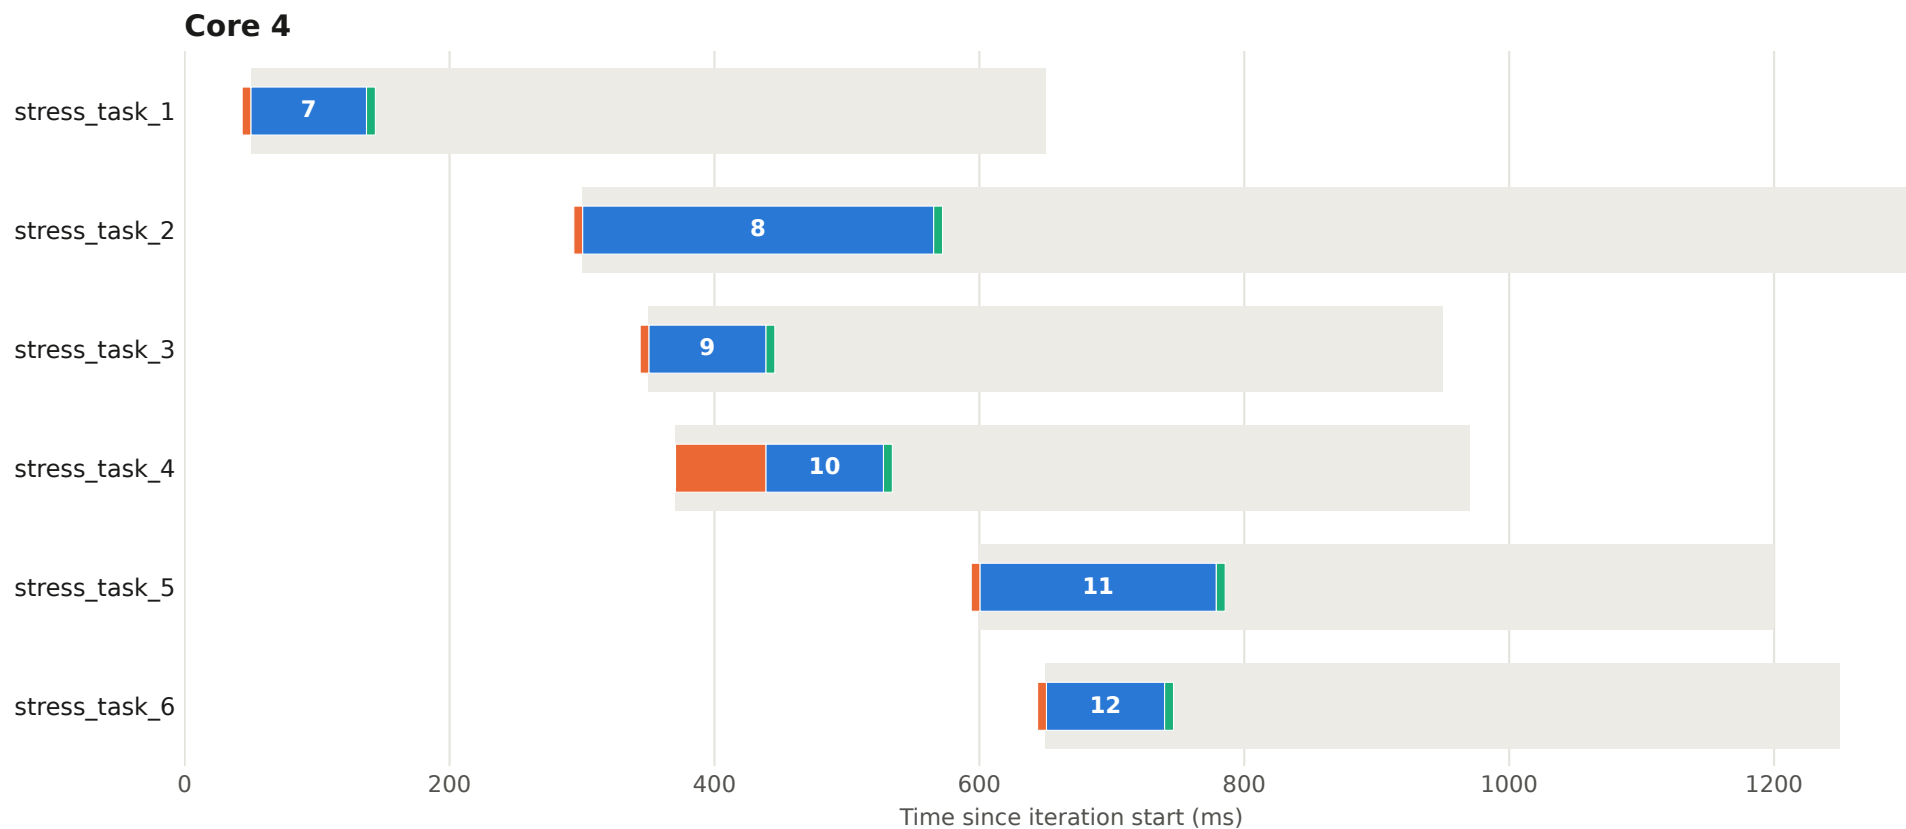


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 42 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

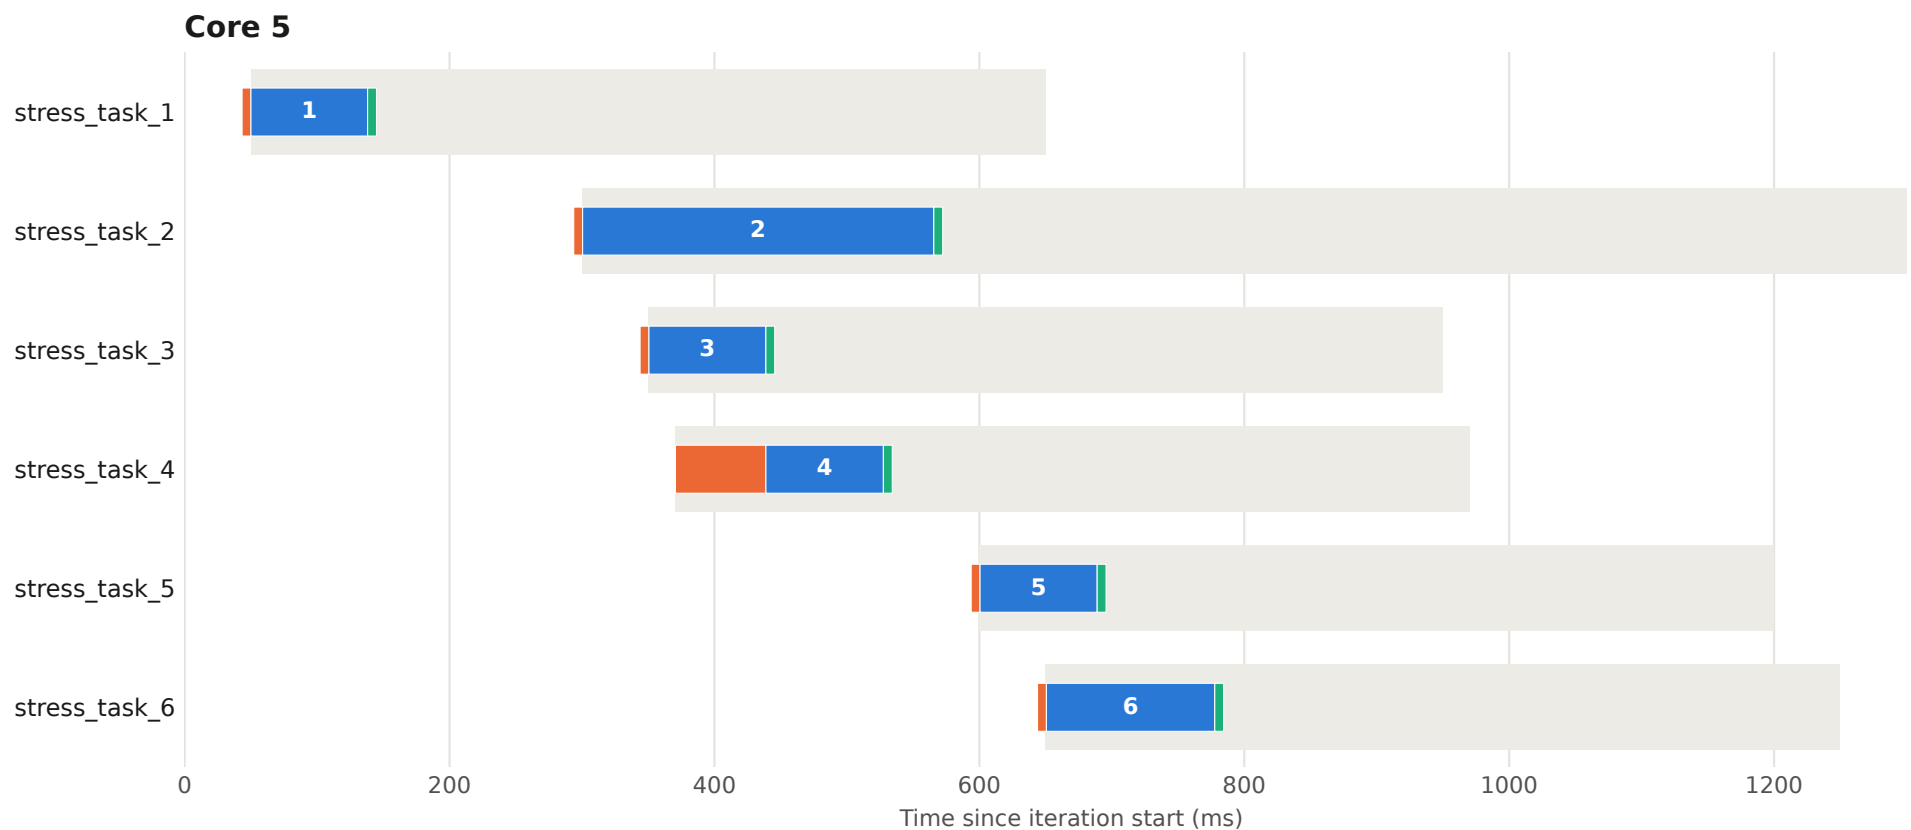


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 43 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

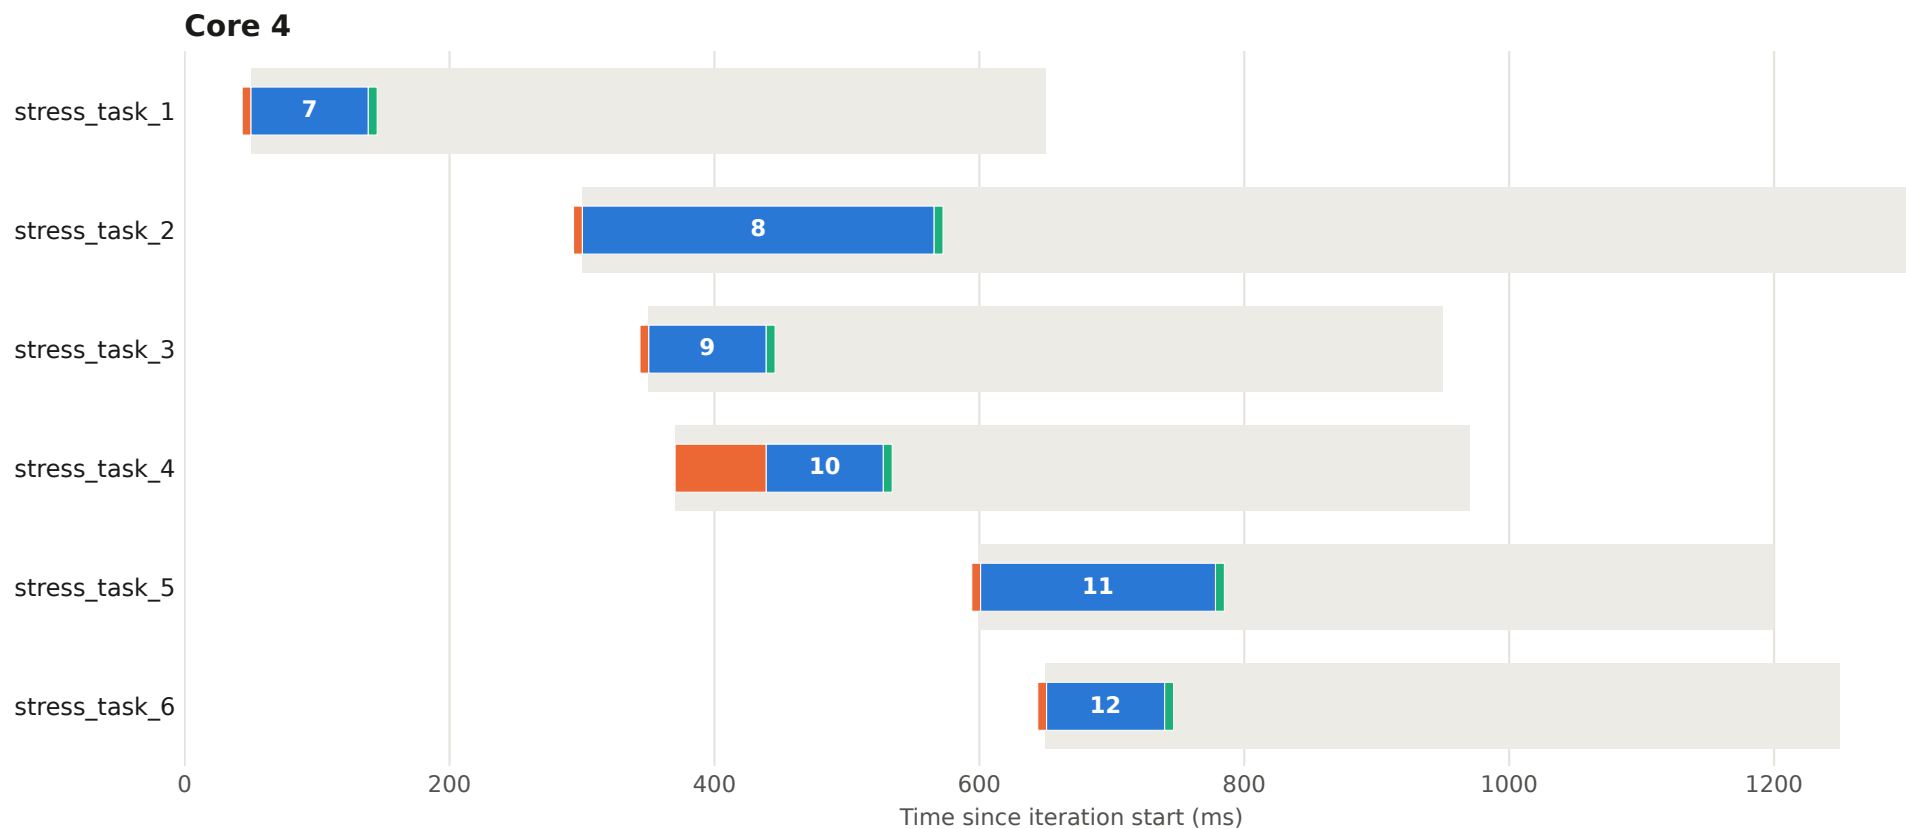


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 43 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

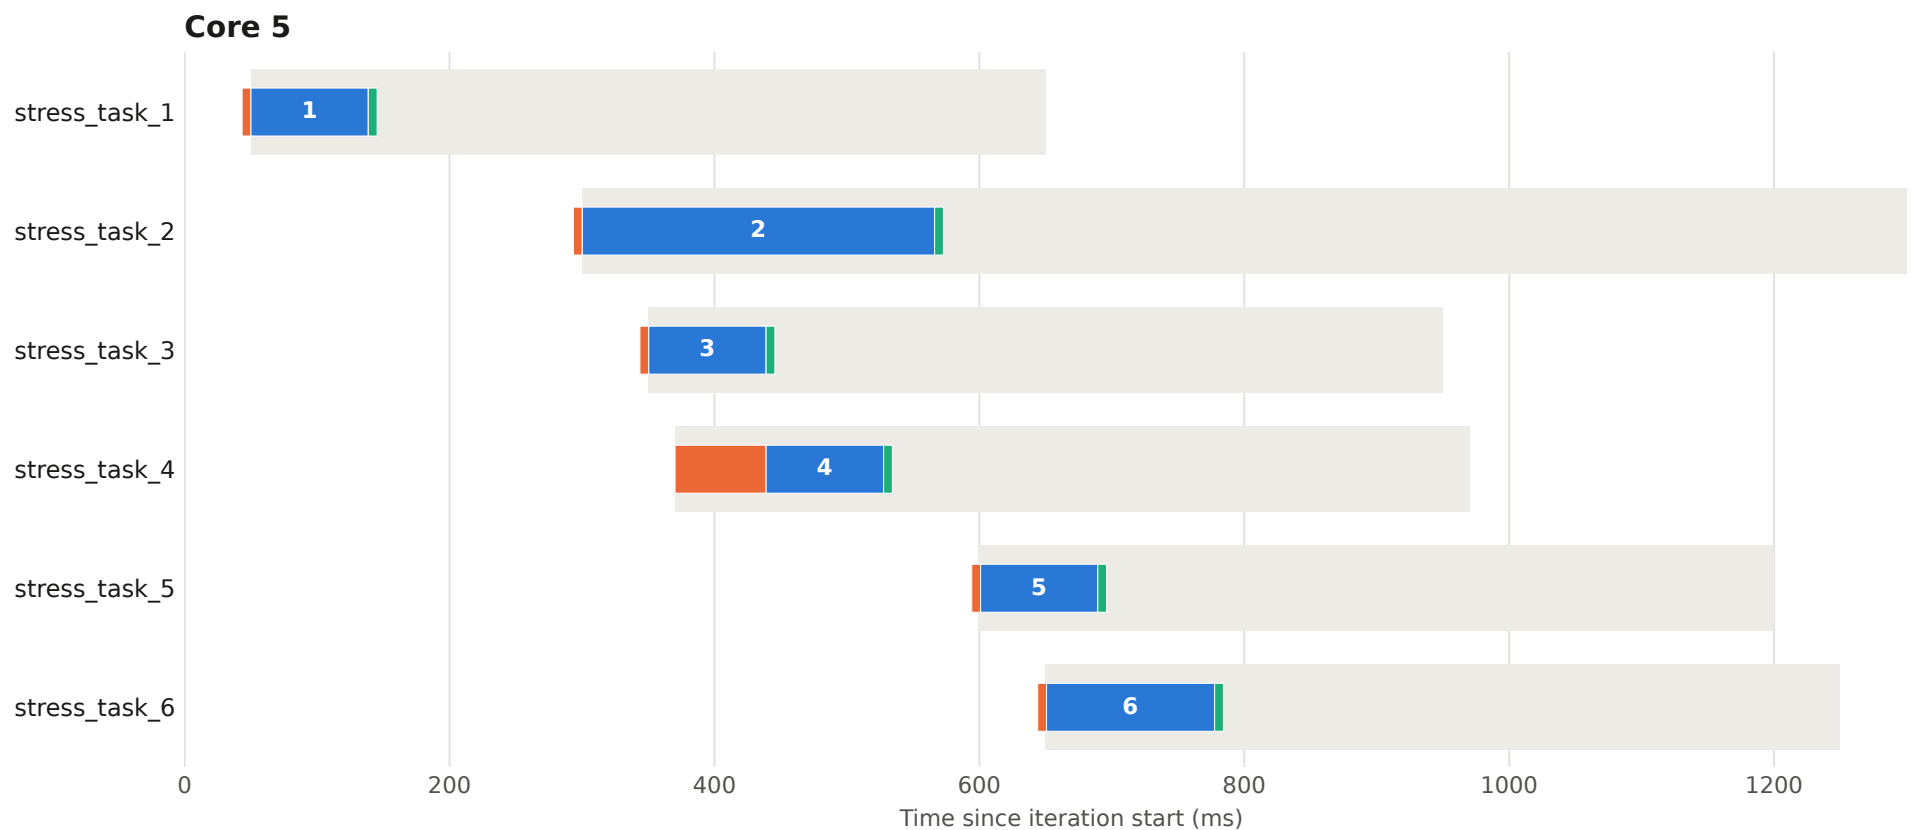


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 44 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

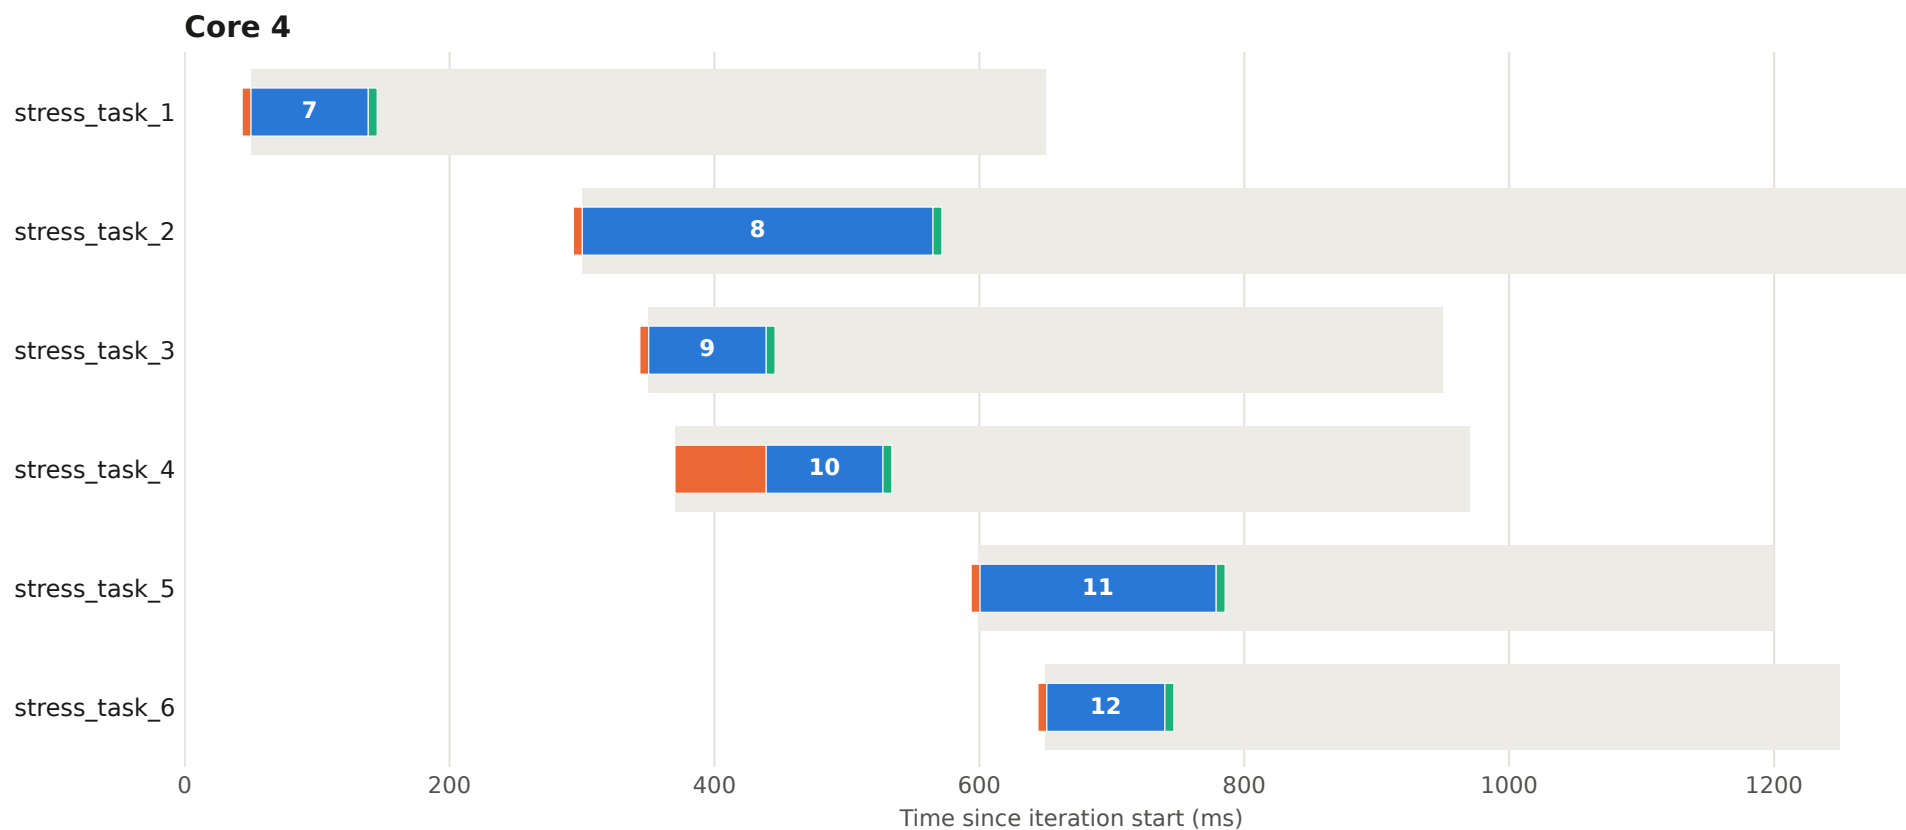


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 44 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

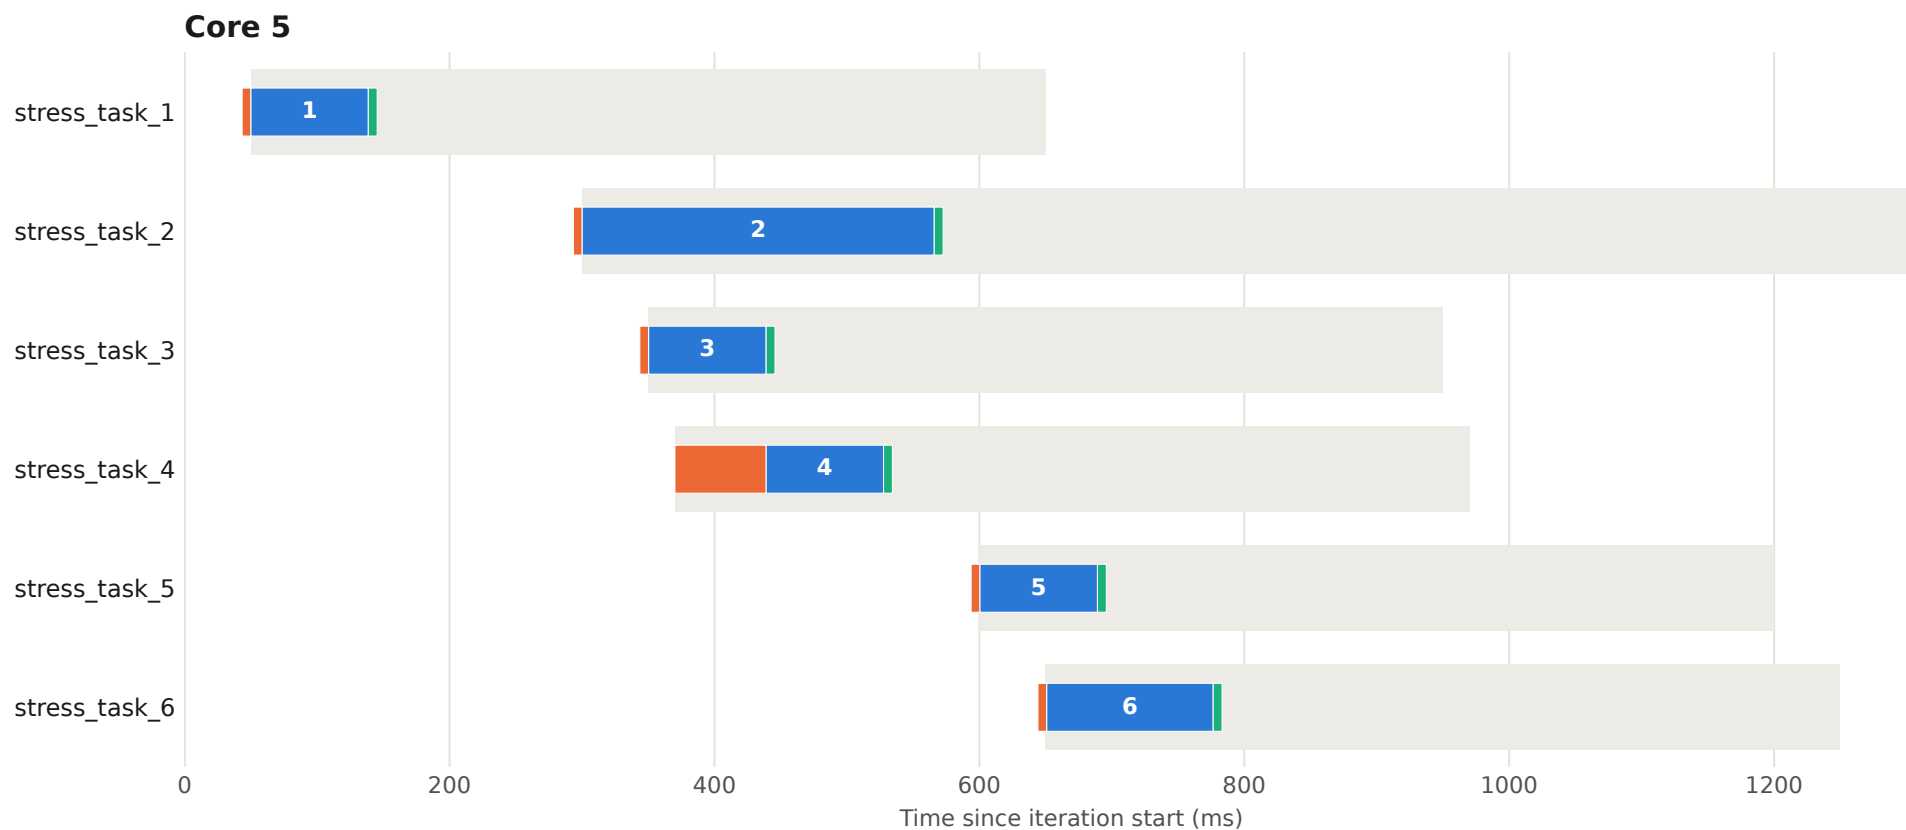


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 45 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

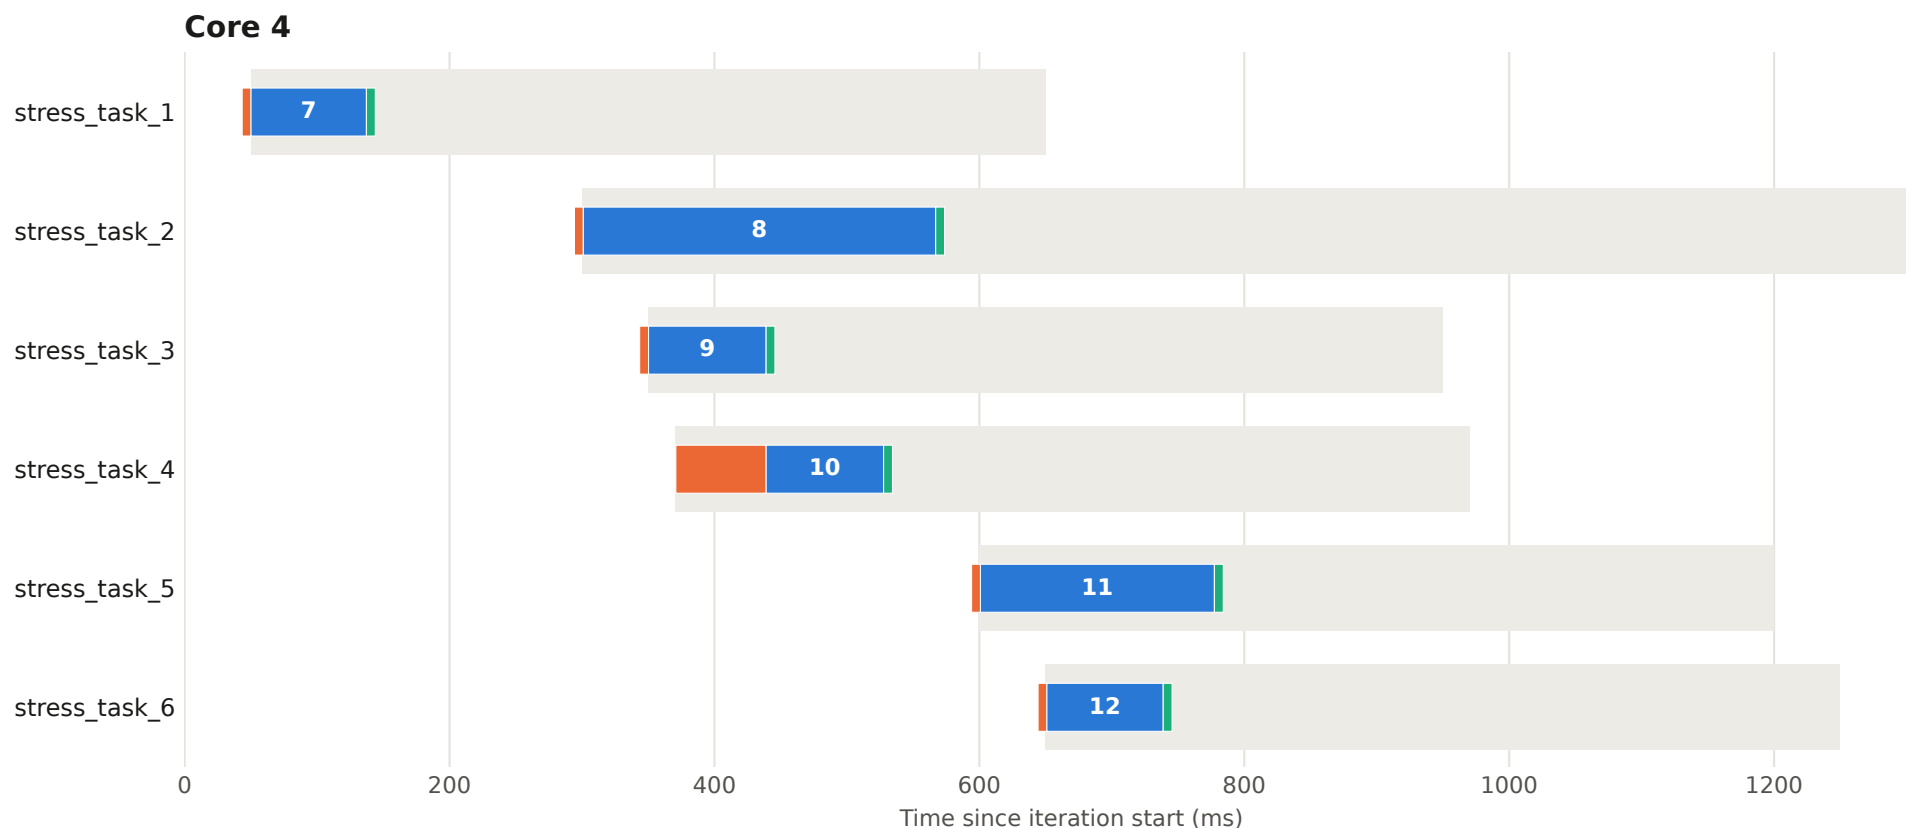


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 45 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

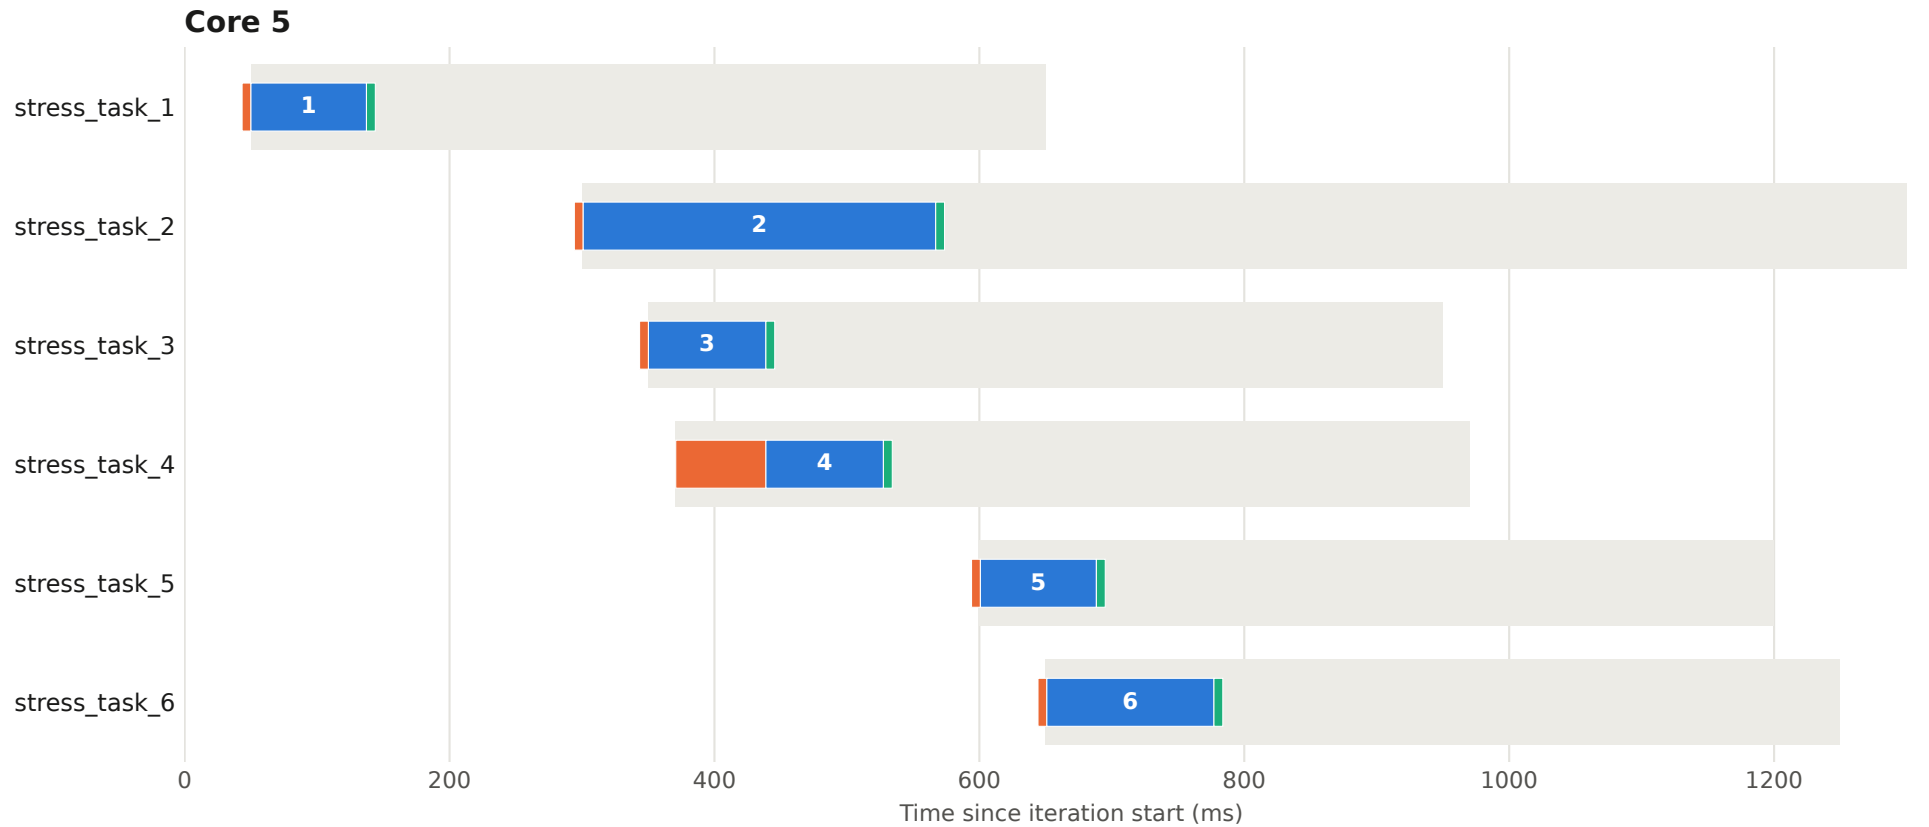


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 46 - core 4

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

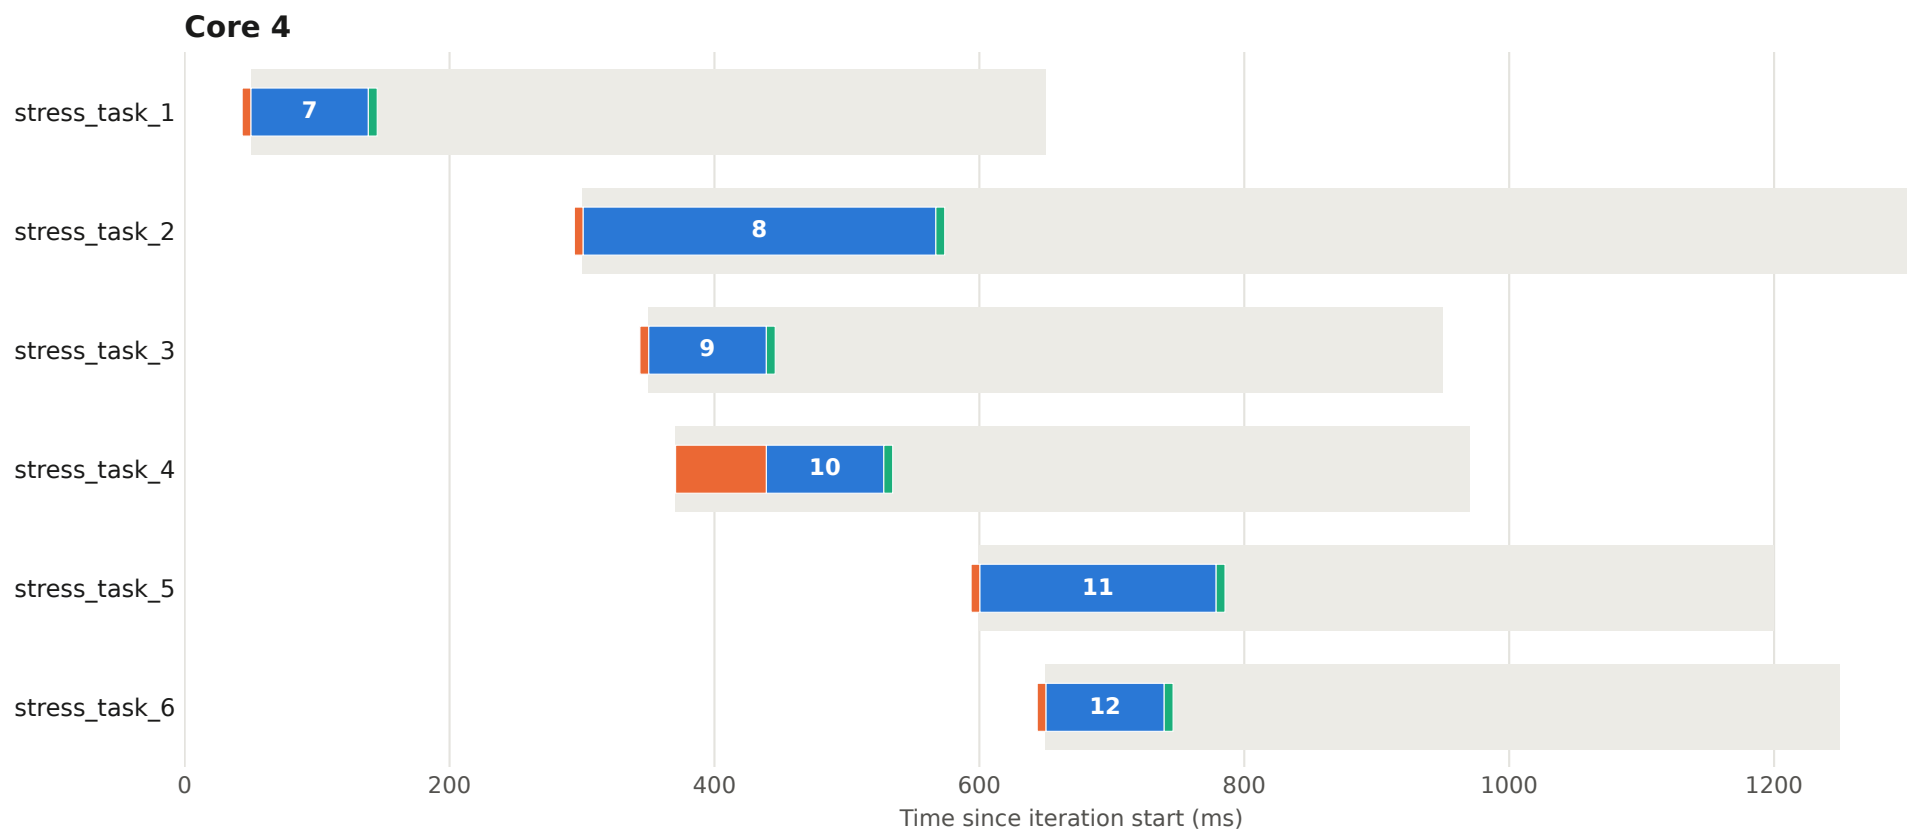

Execution plan - iteration 46 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

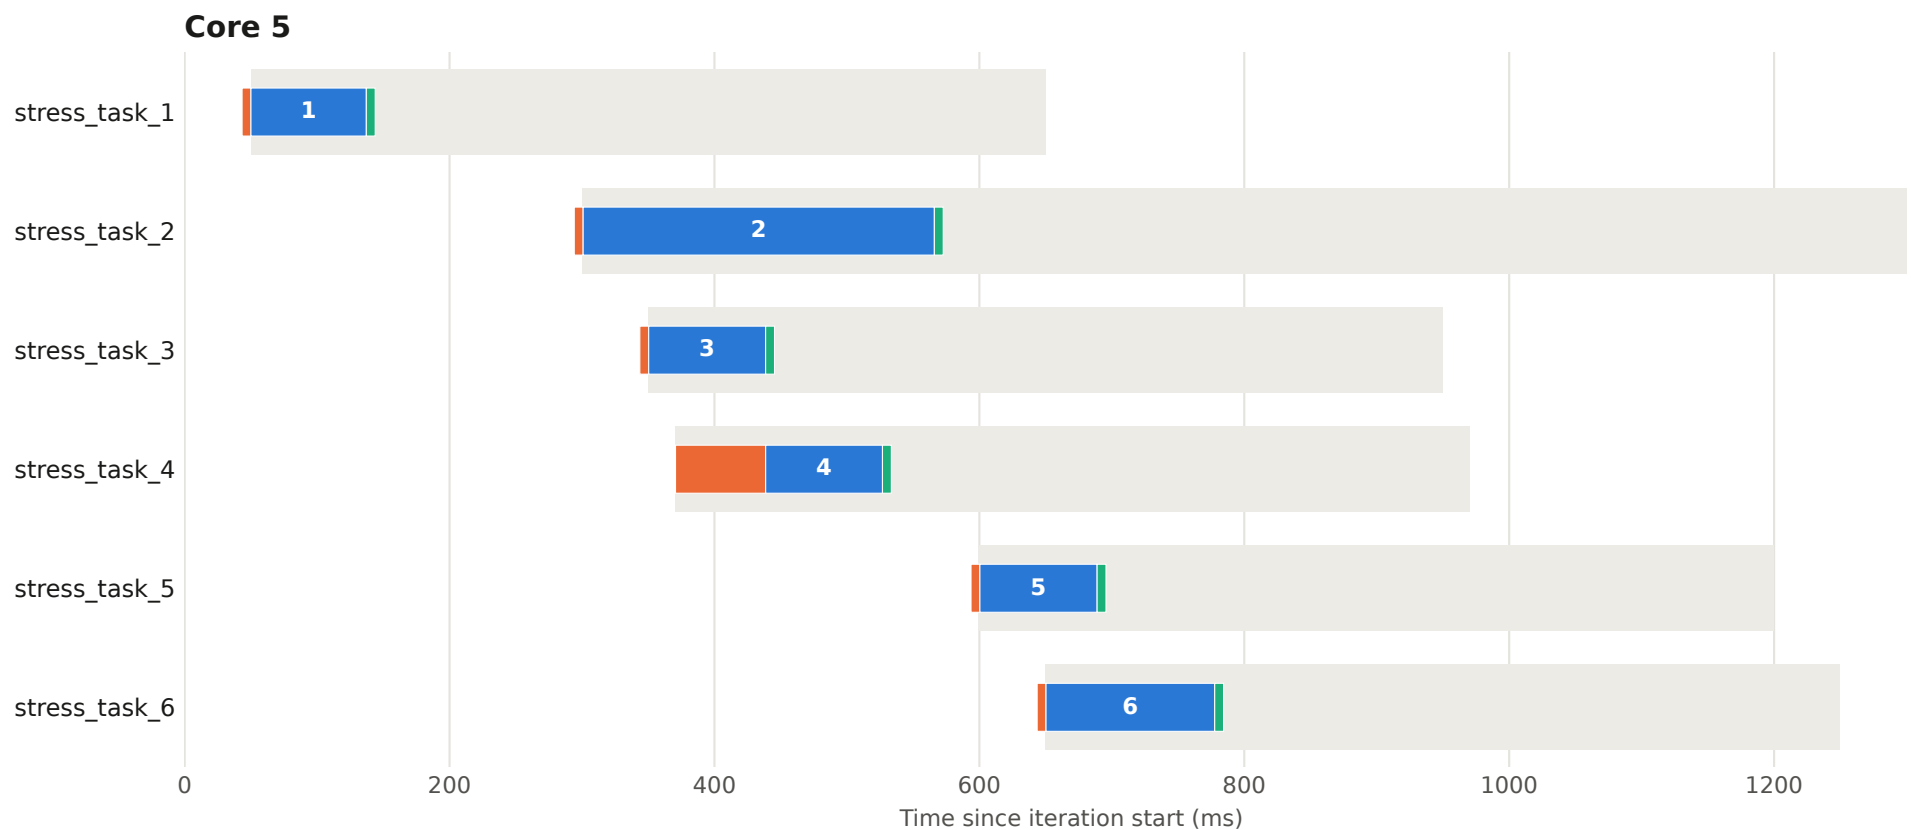


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 47 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

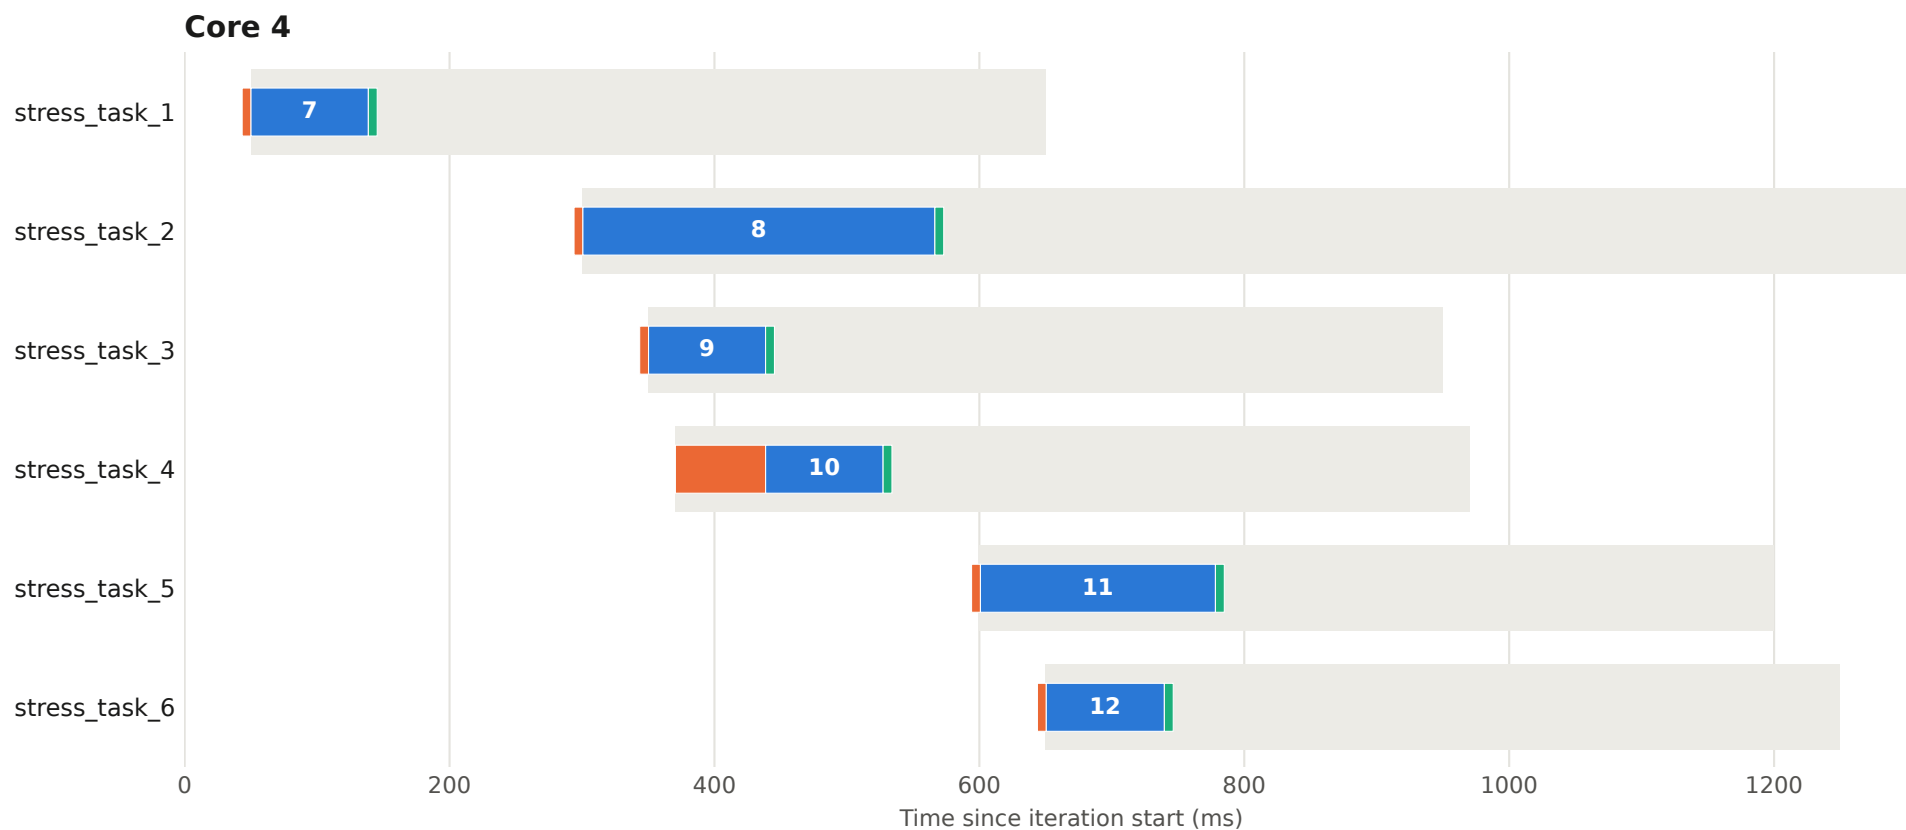


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 47 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

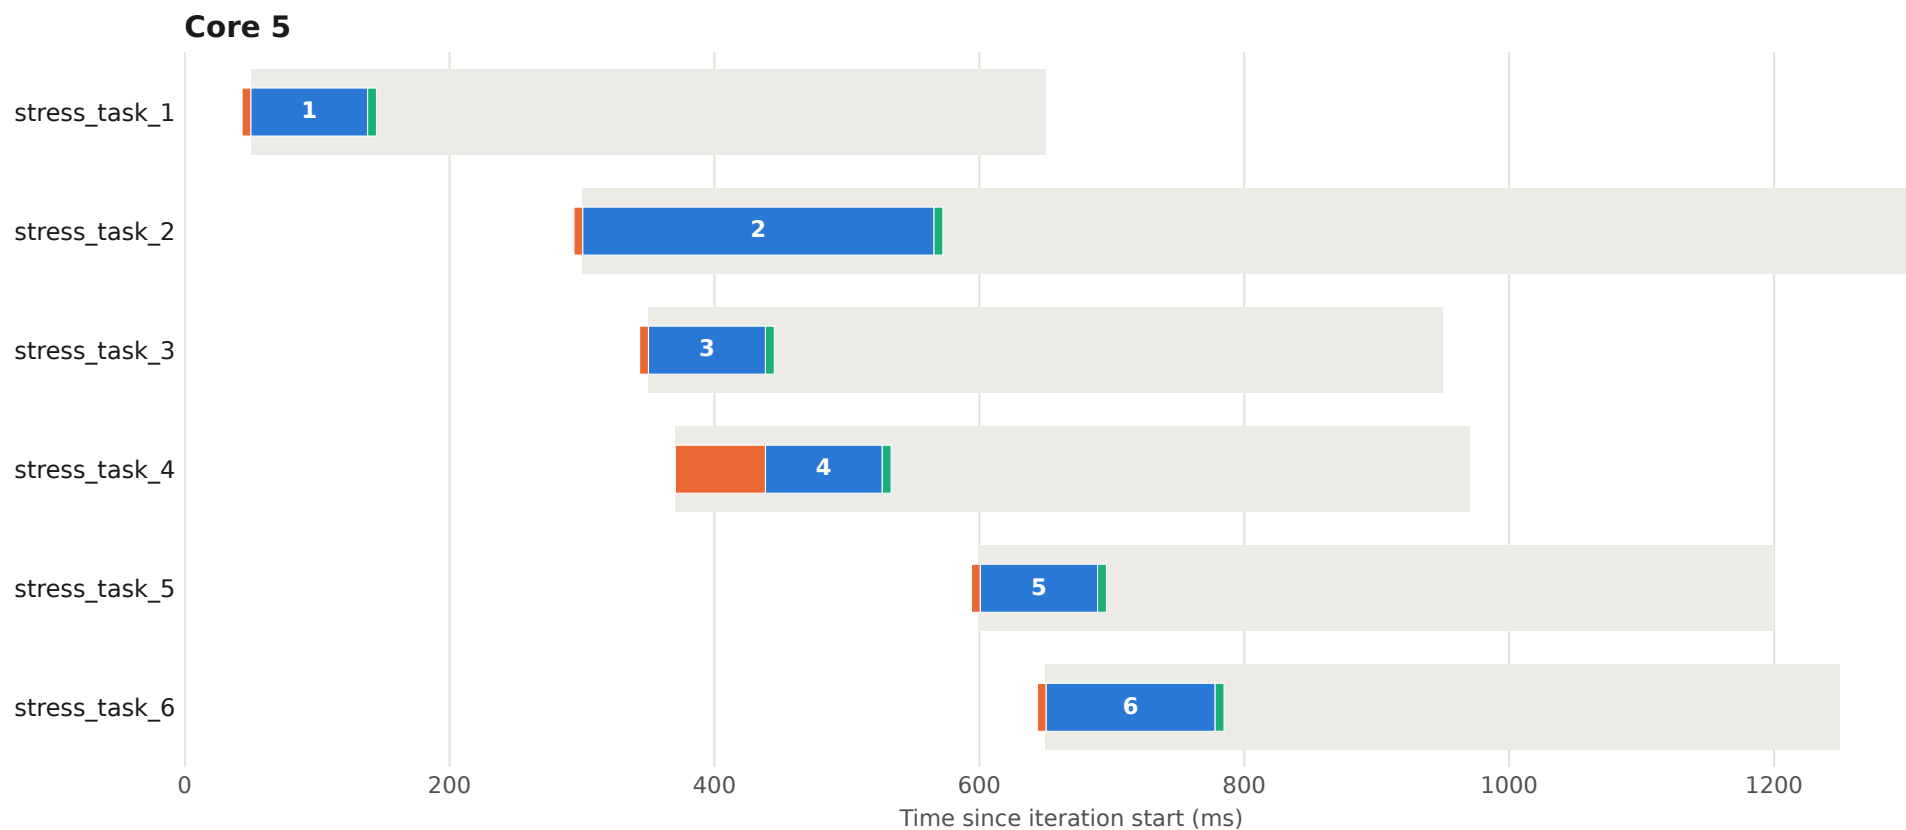


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 48 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

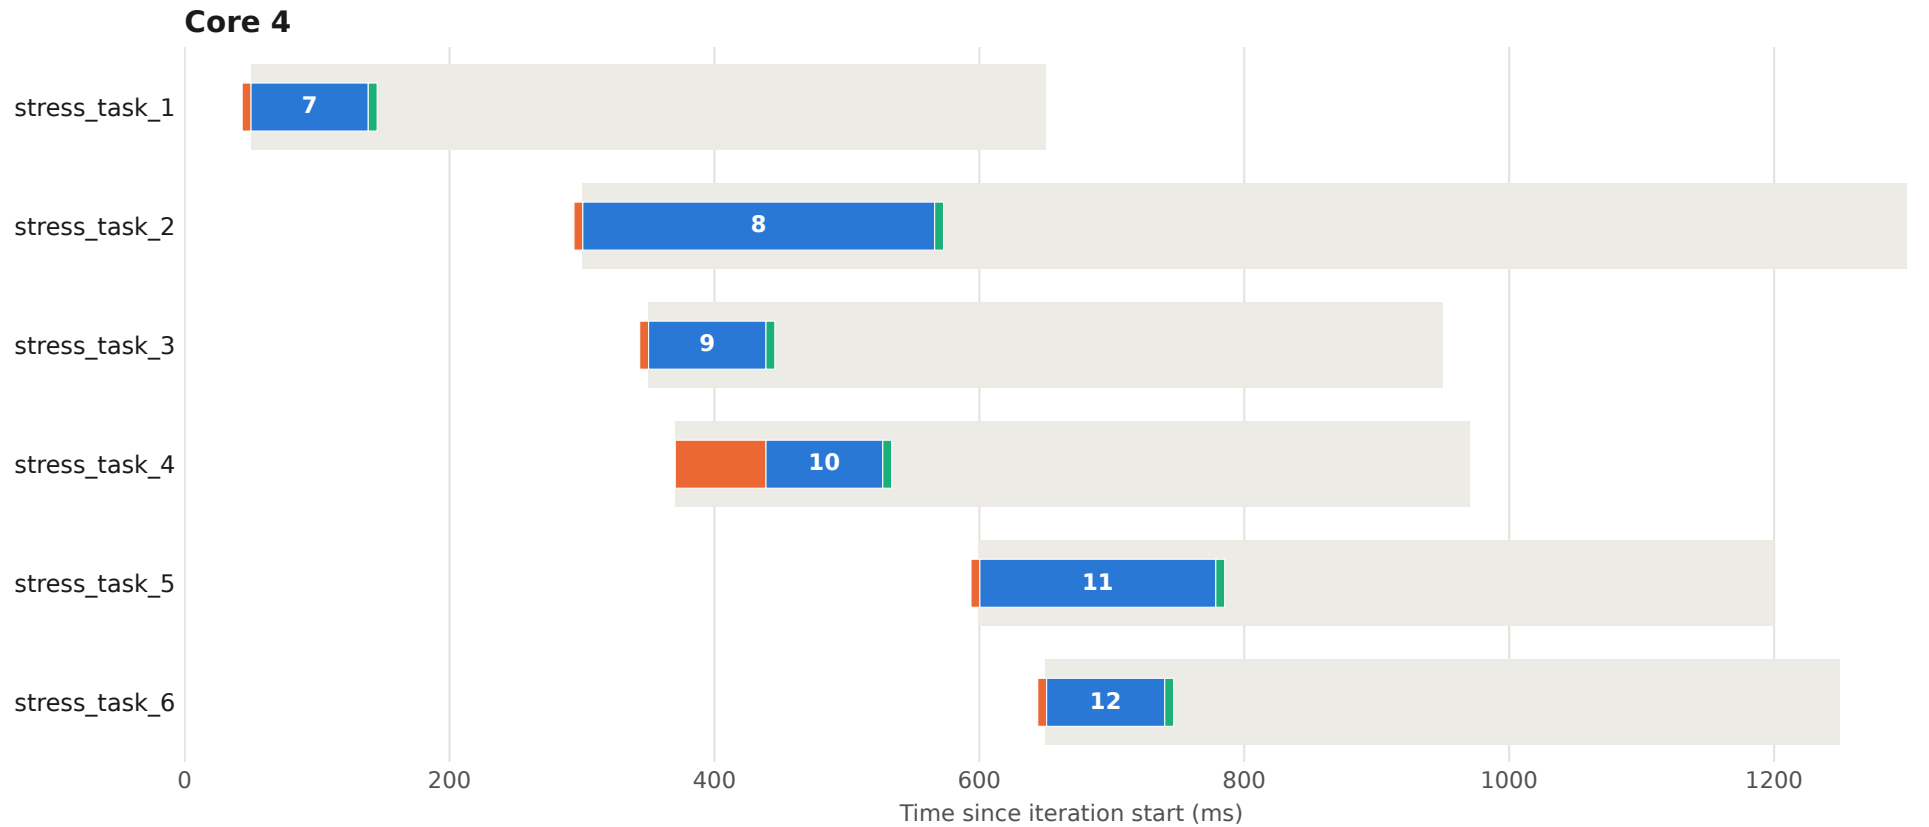


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 48 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

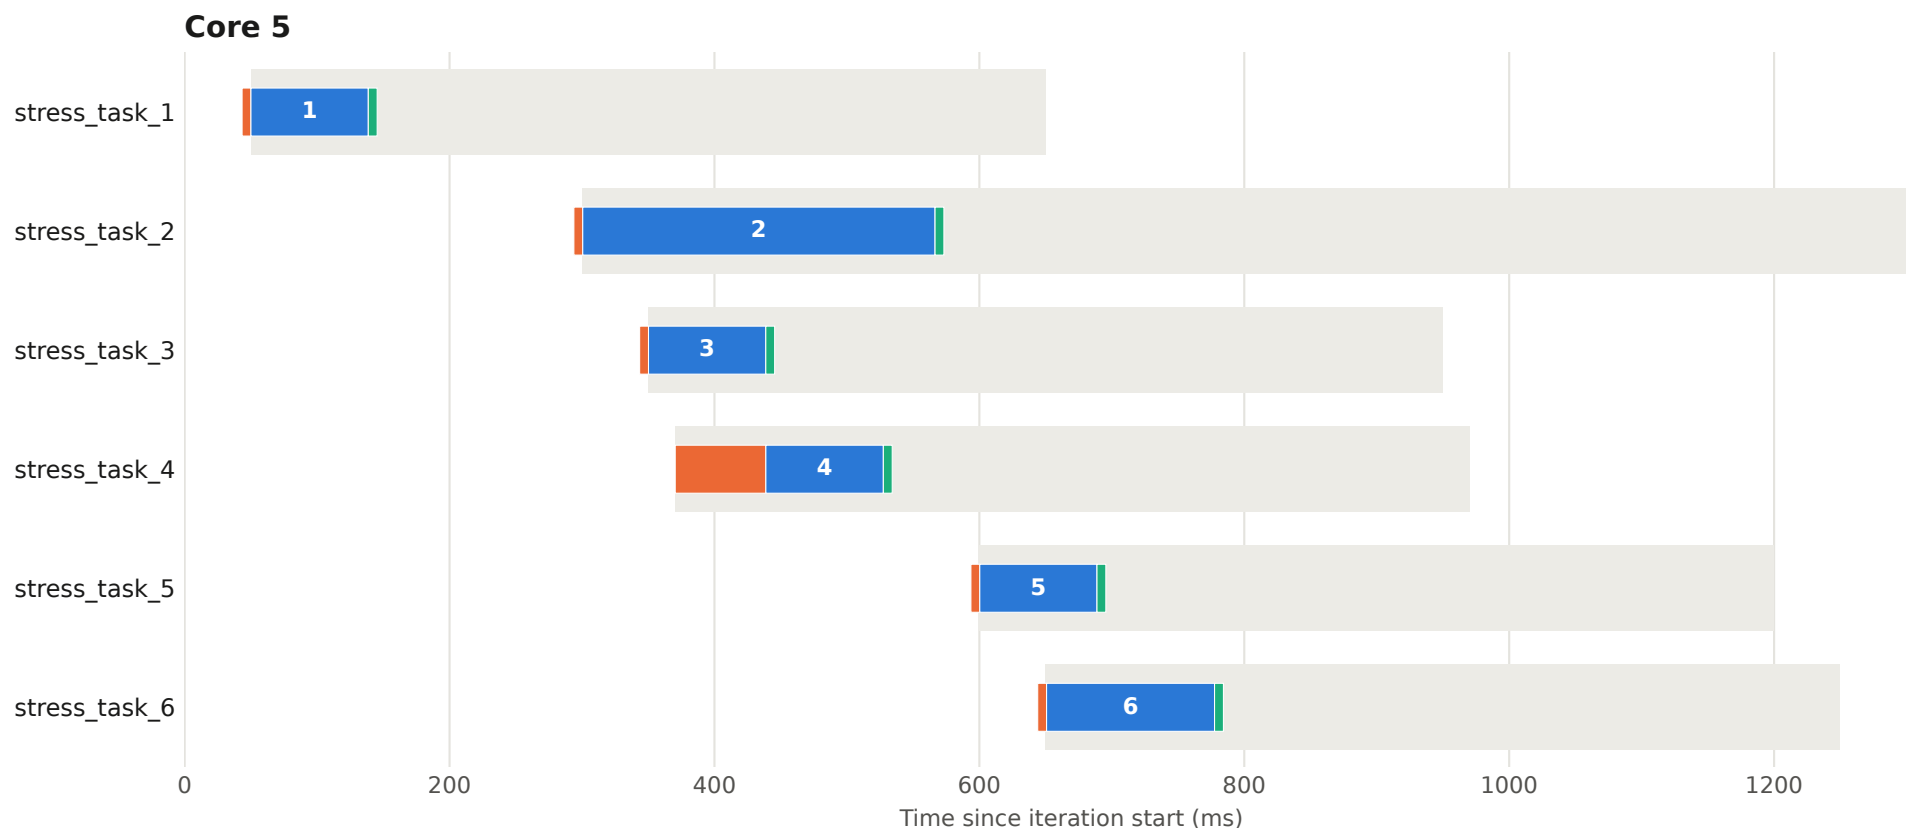


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 49 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

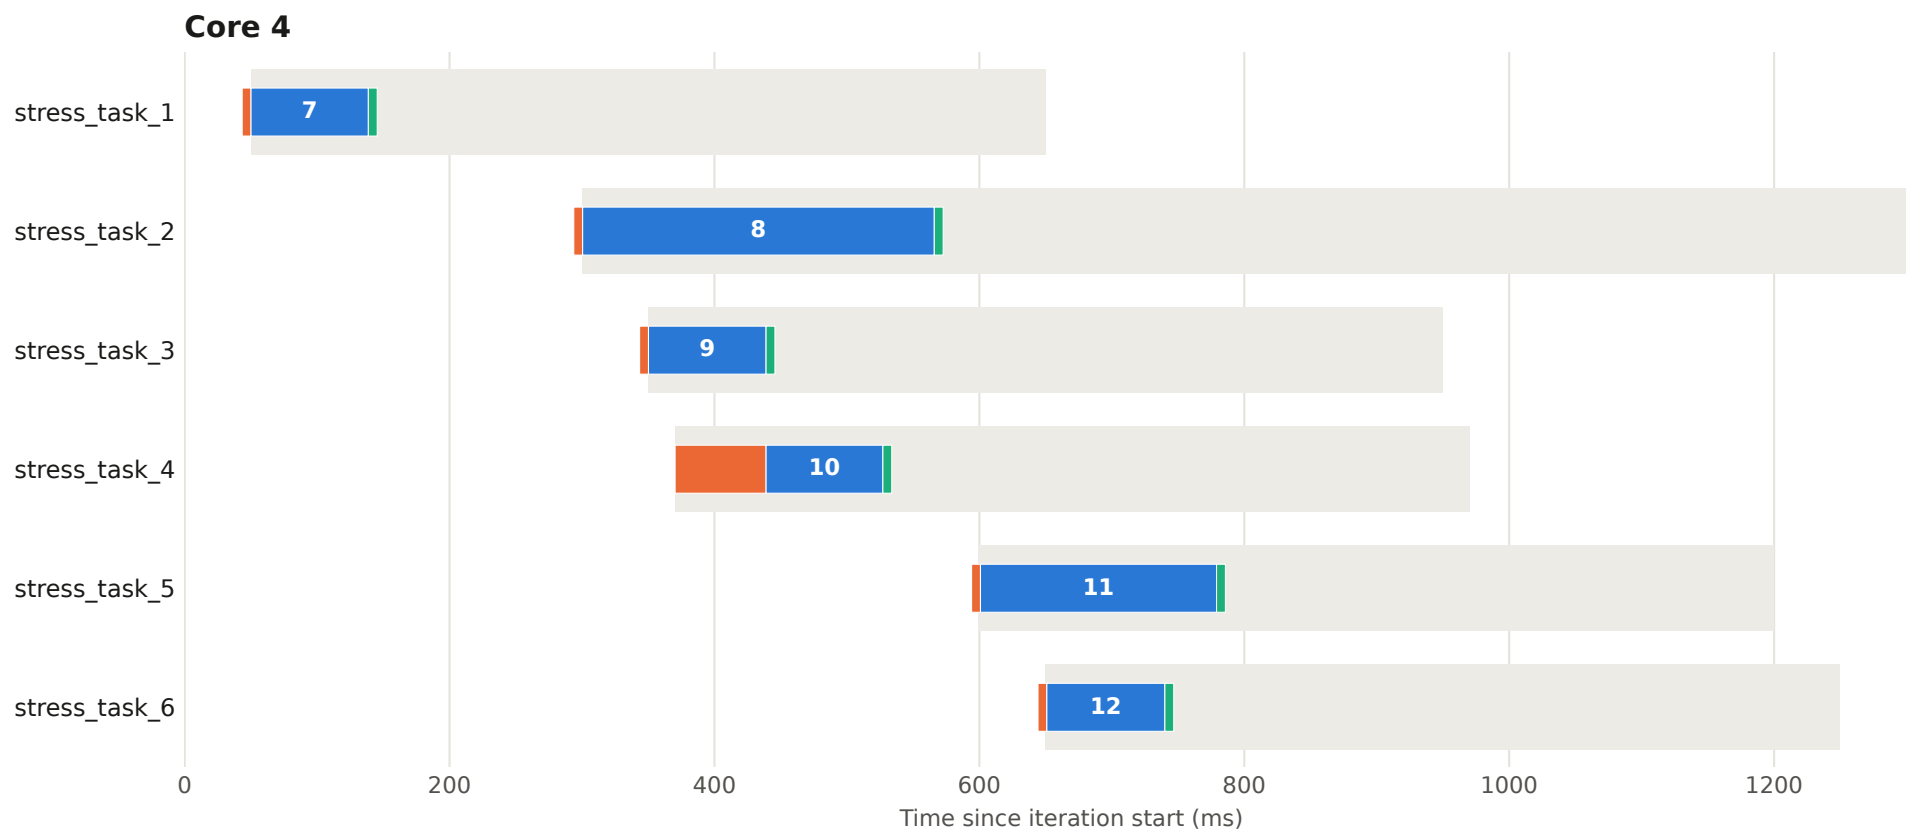


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 49 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

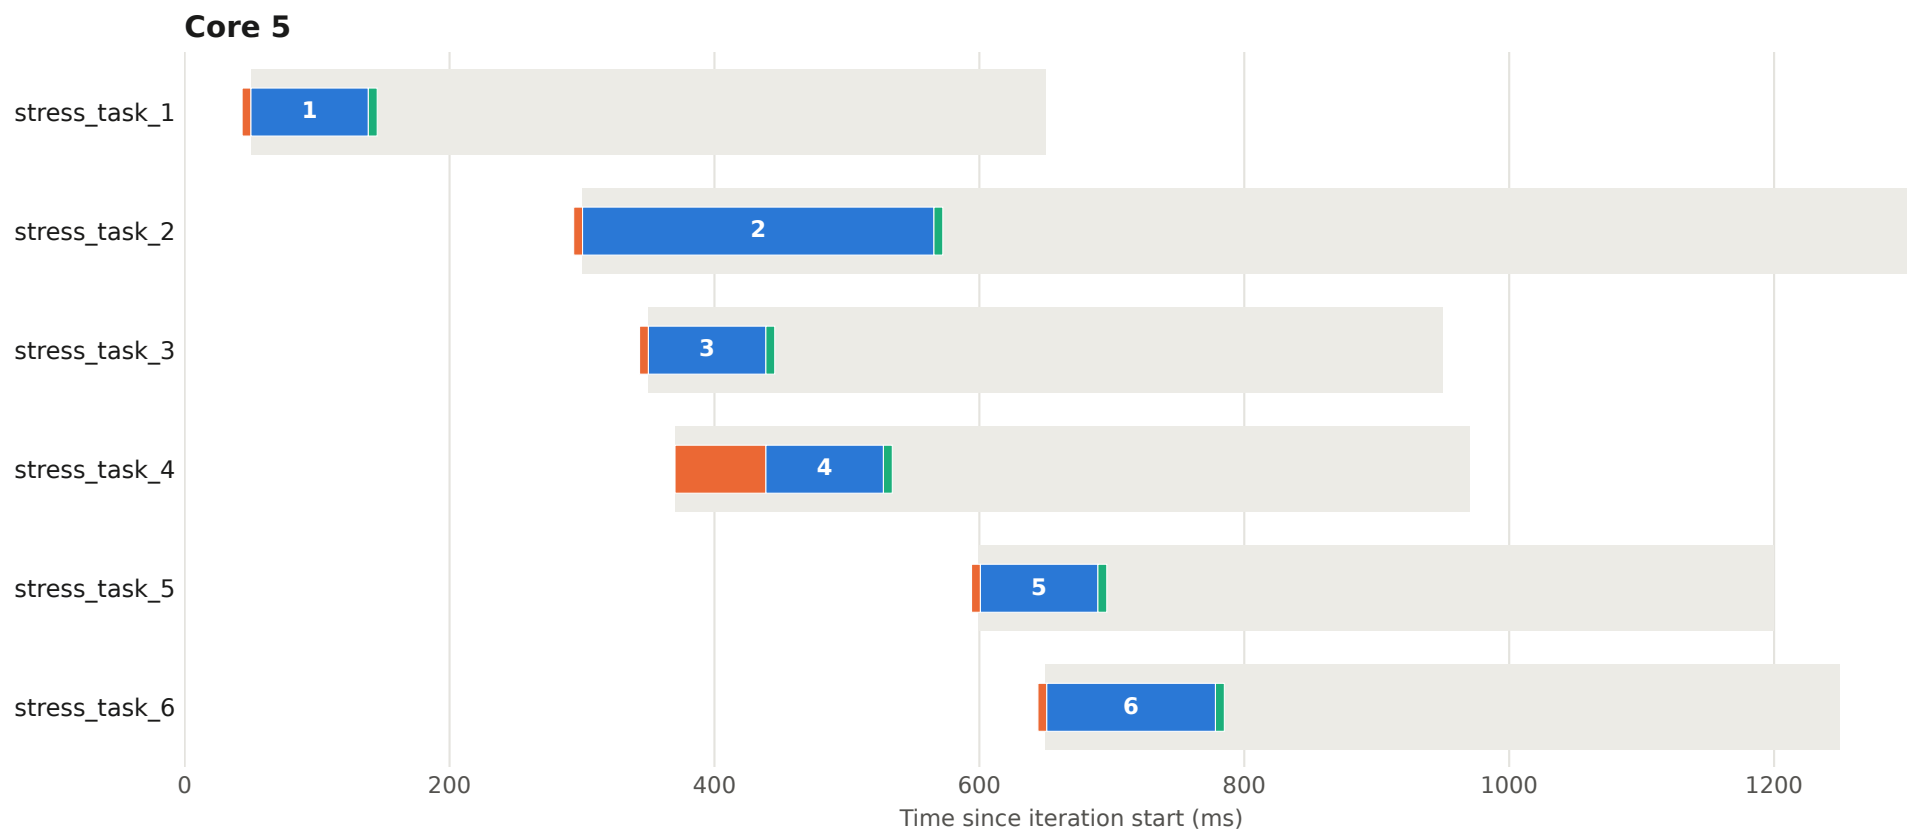


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 50 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

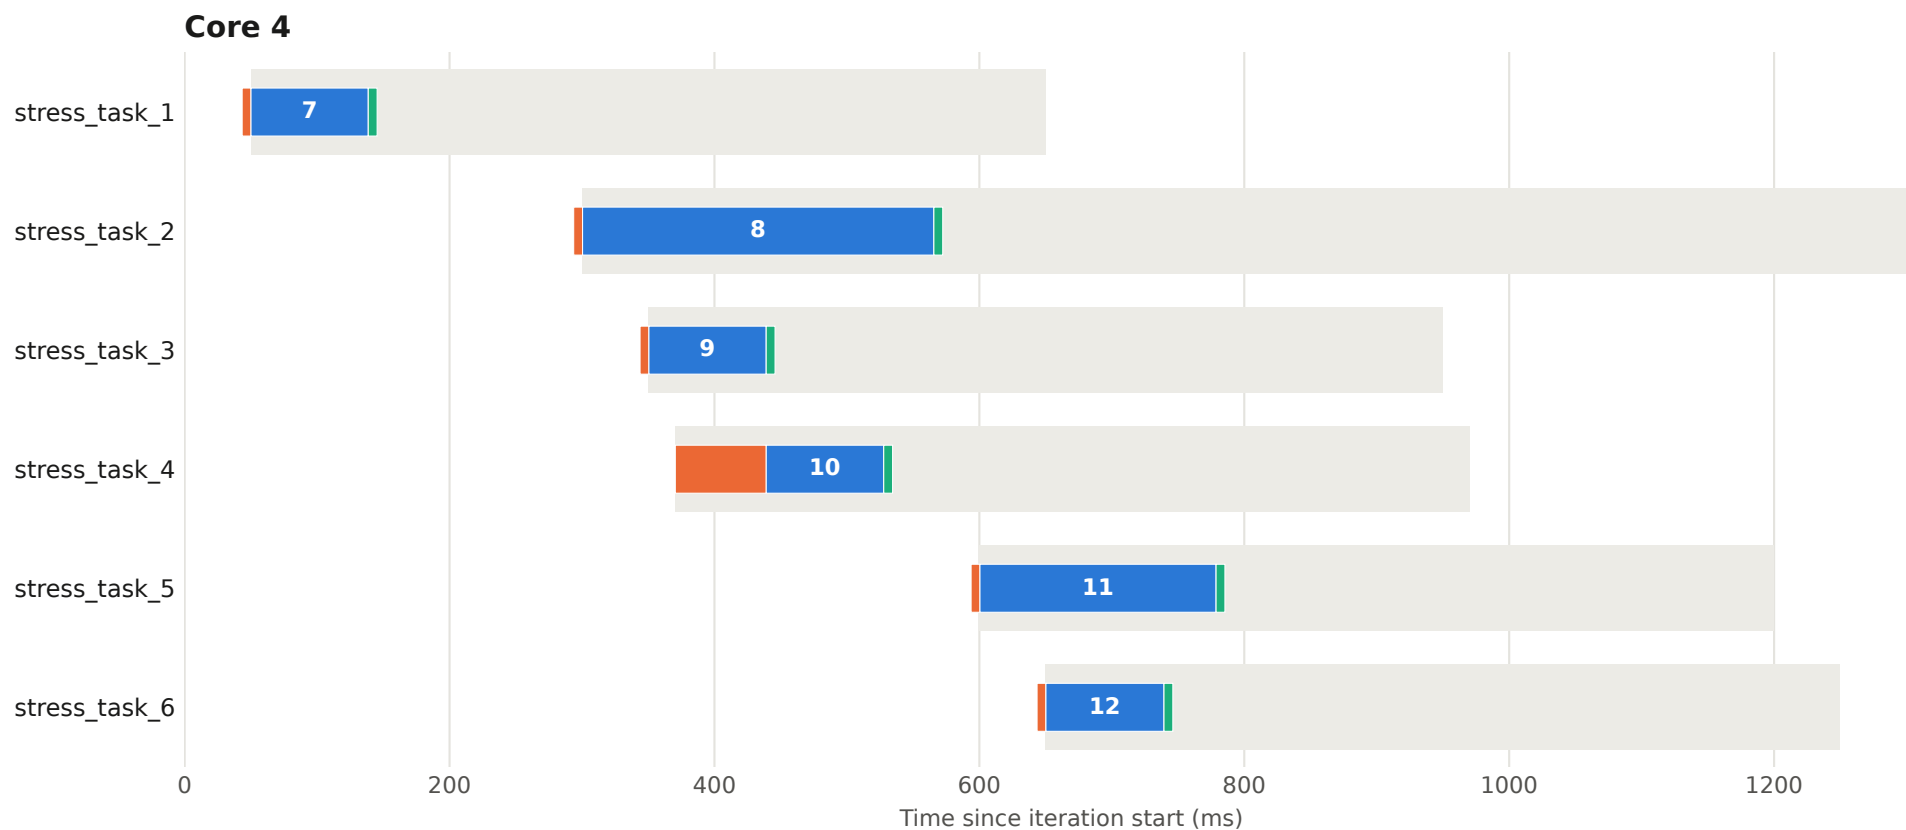


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 50 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

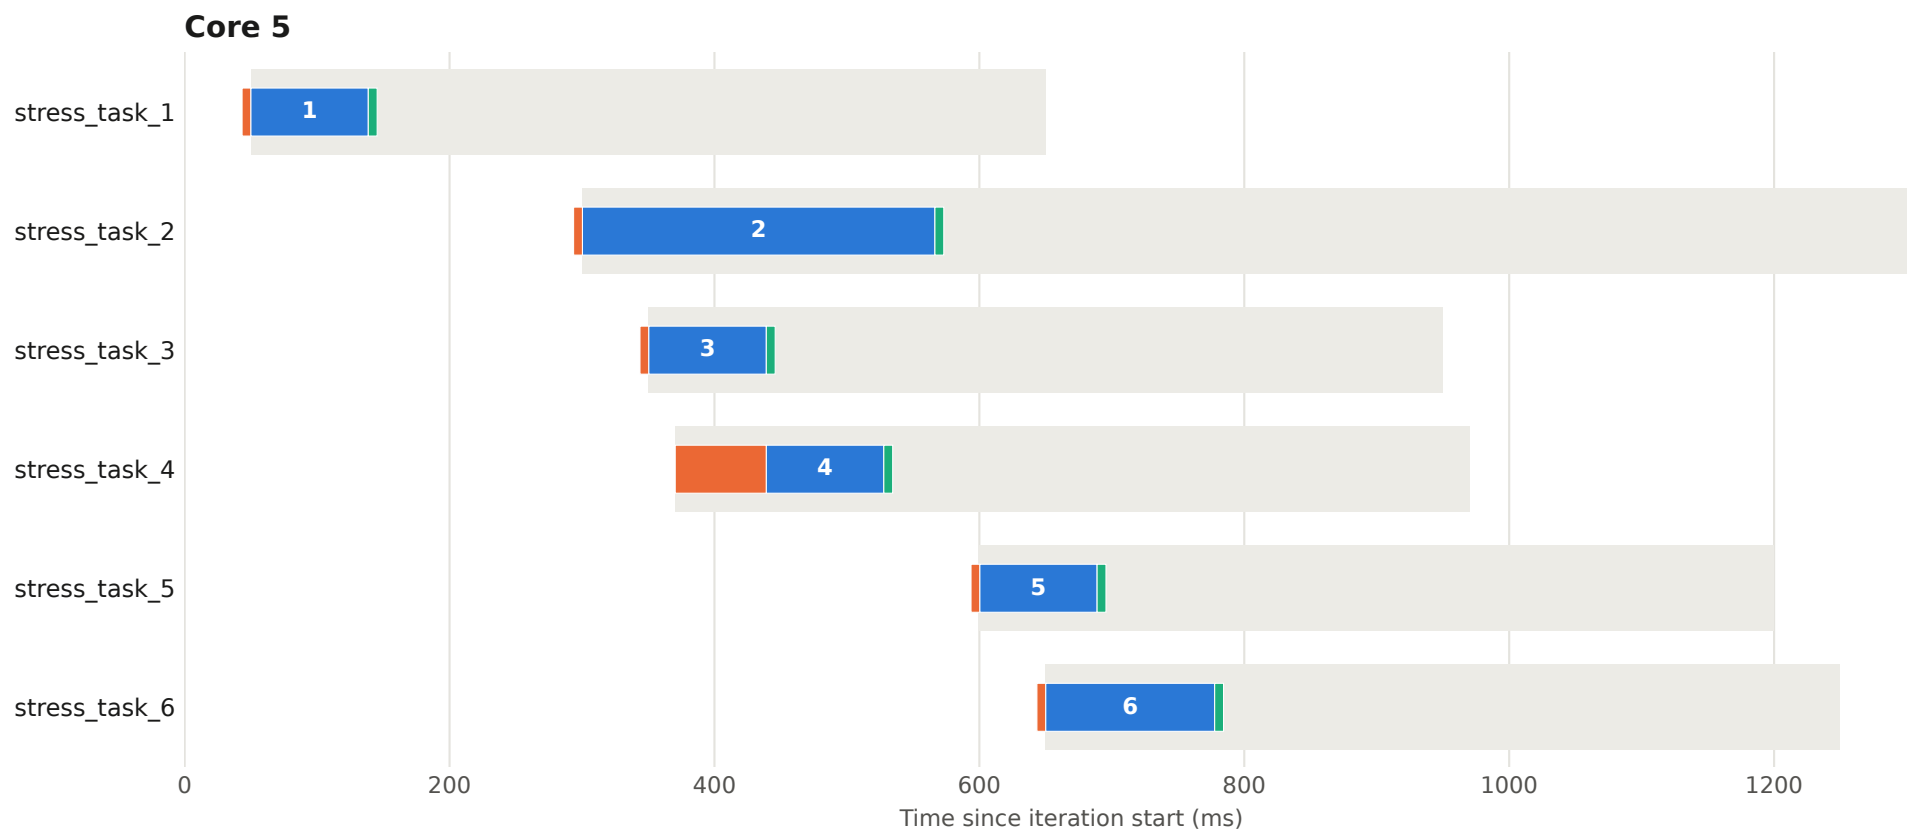


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 51 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

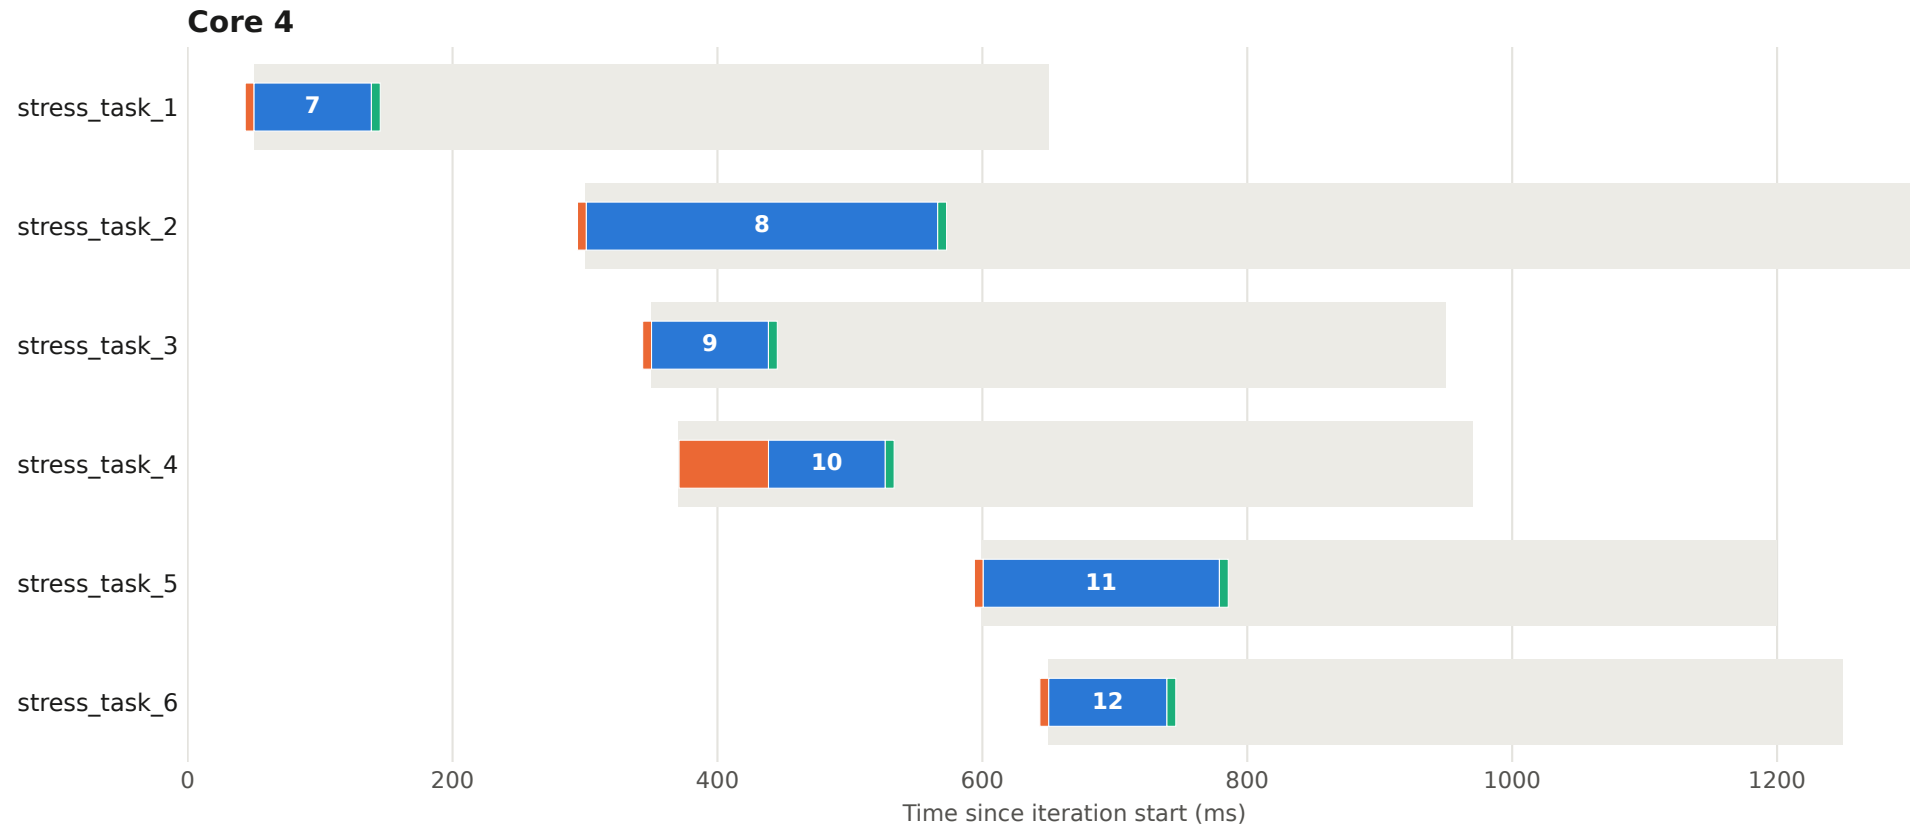


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 51 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

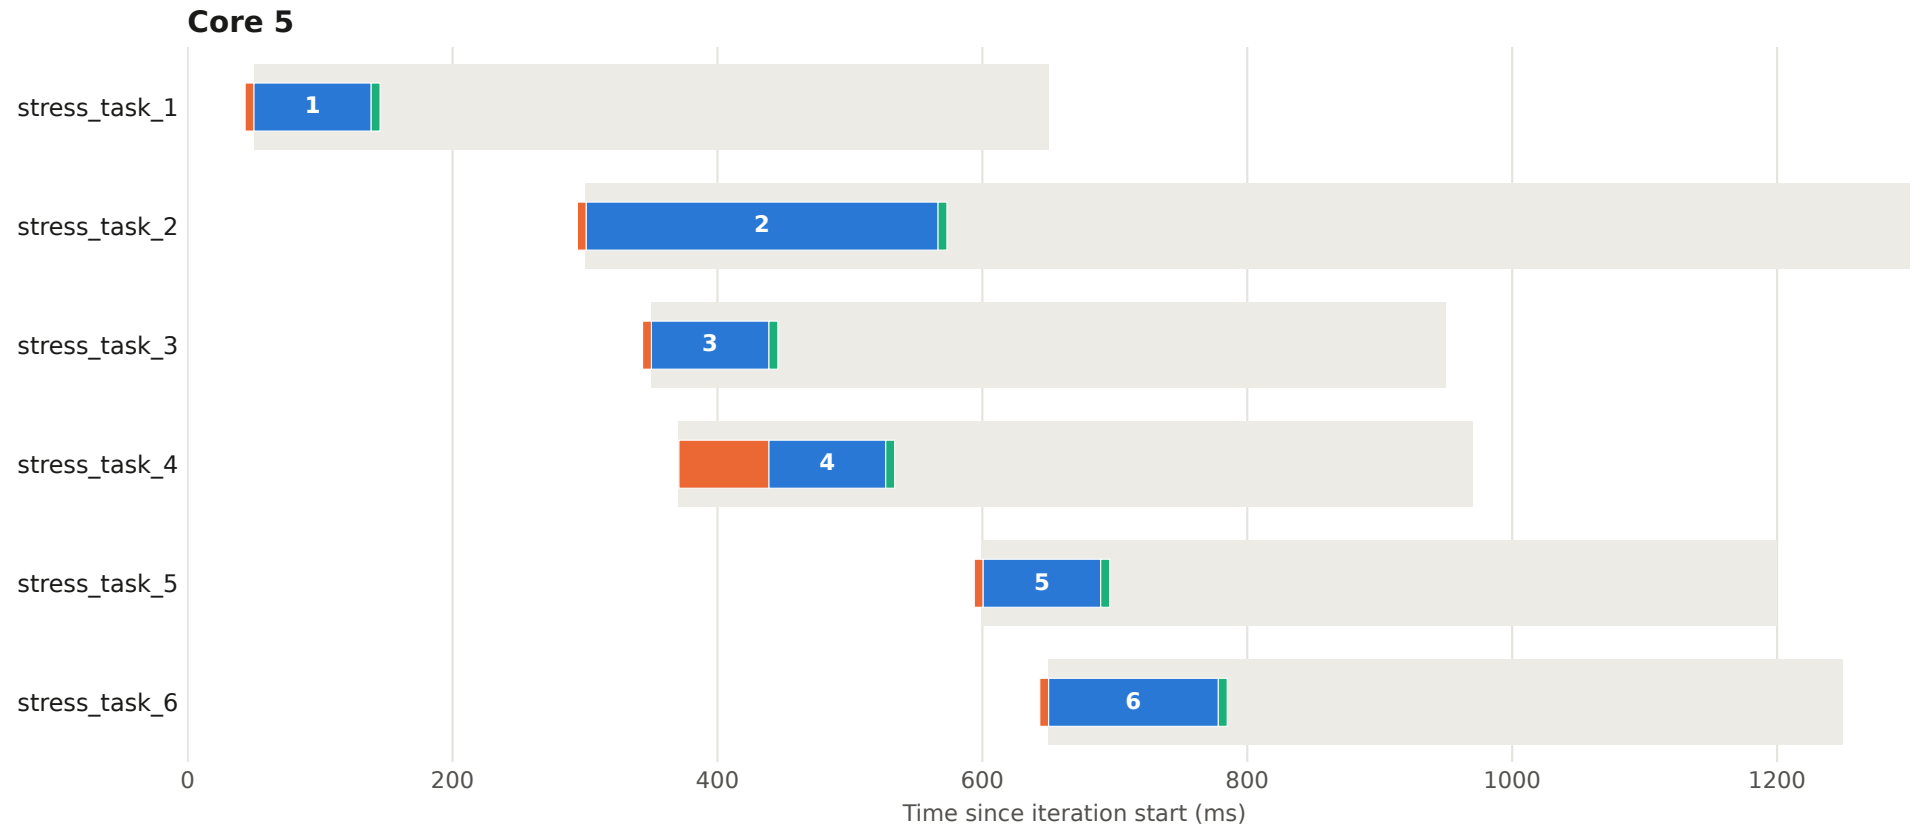


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 52 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

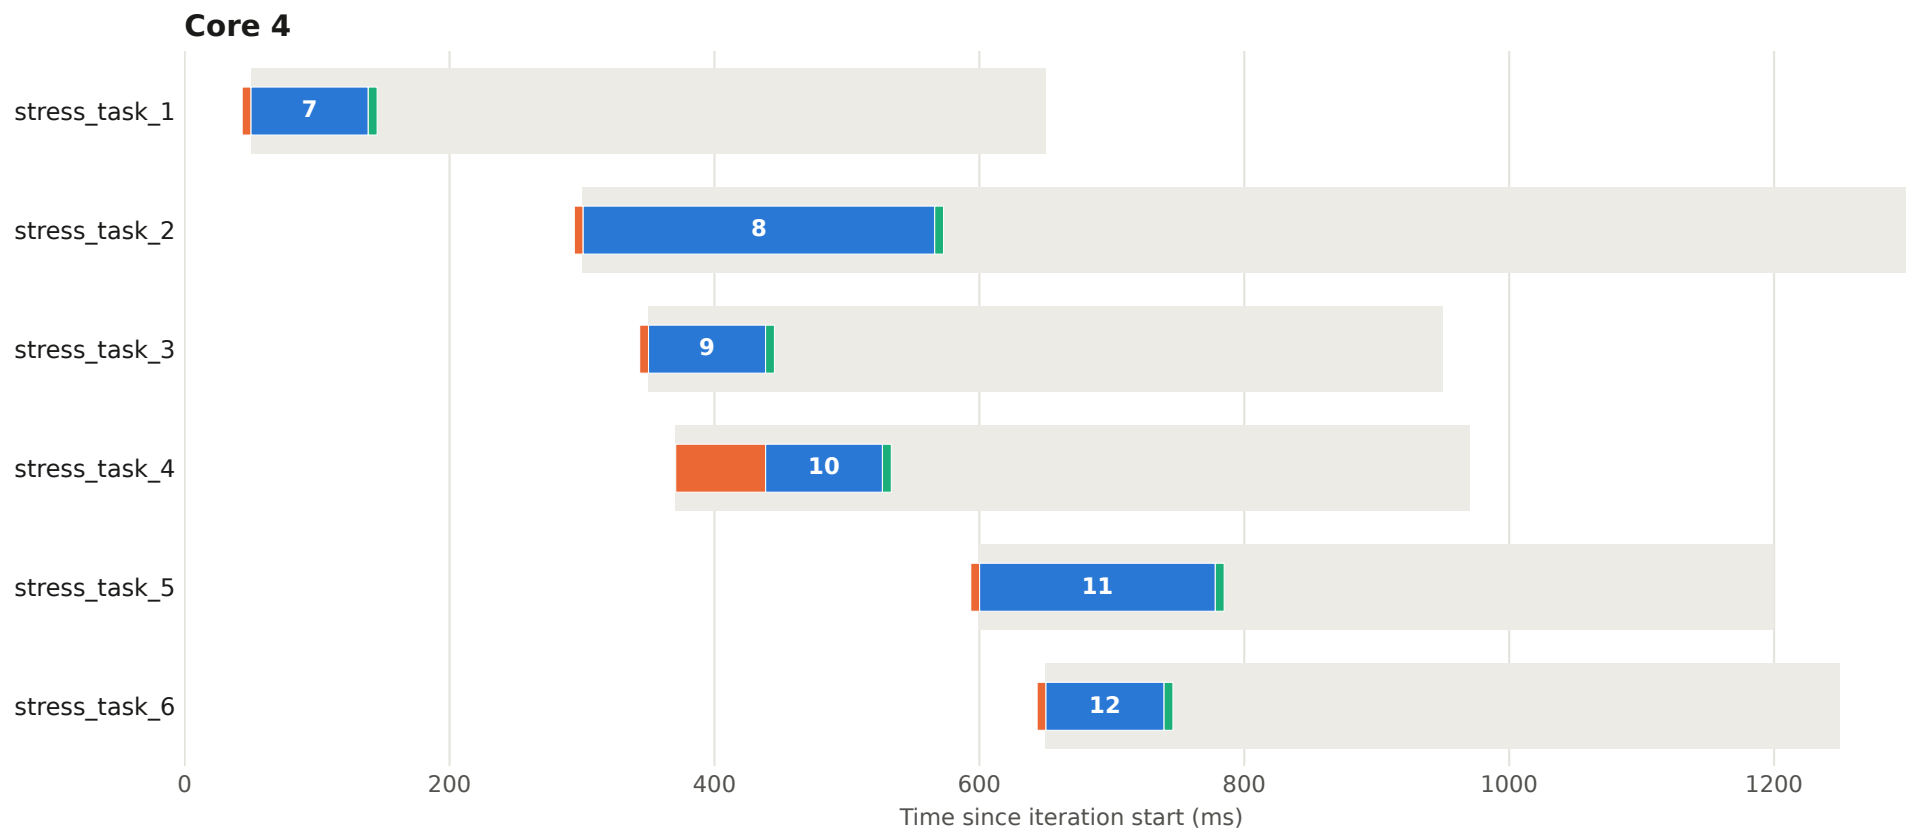


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 52 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

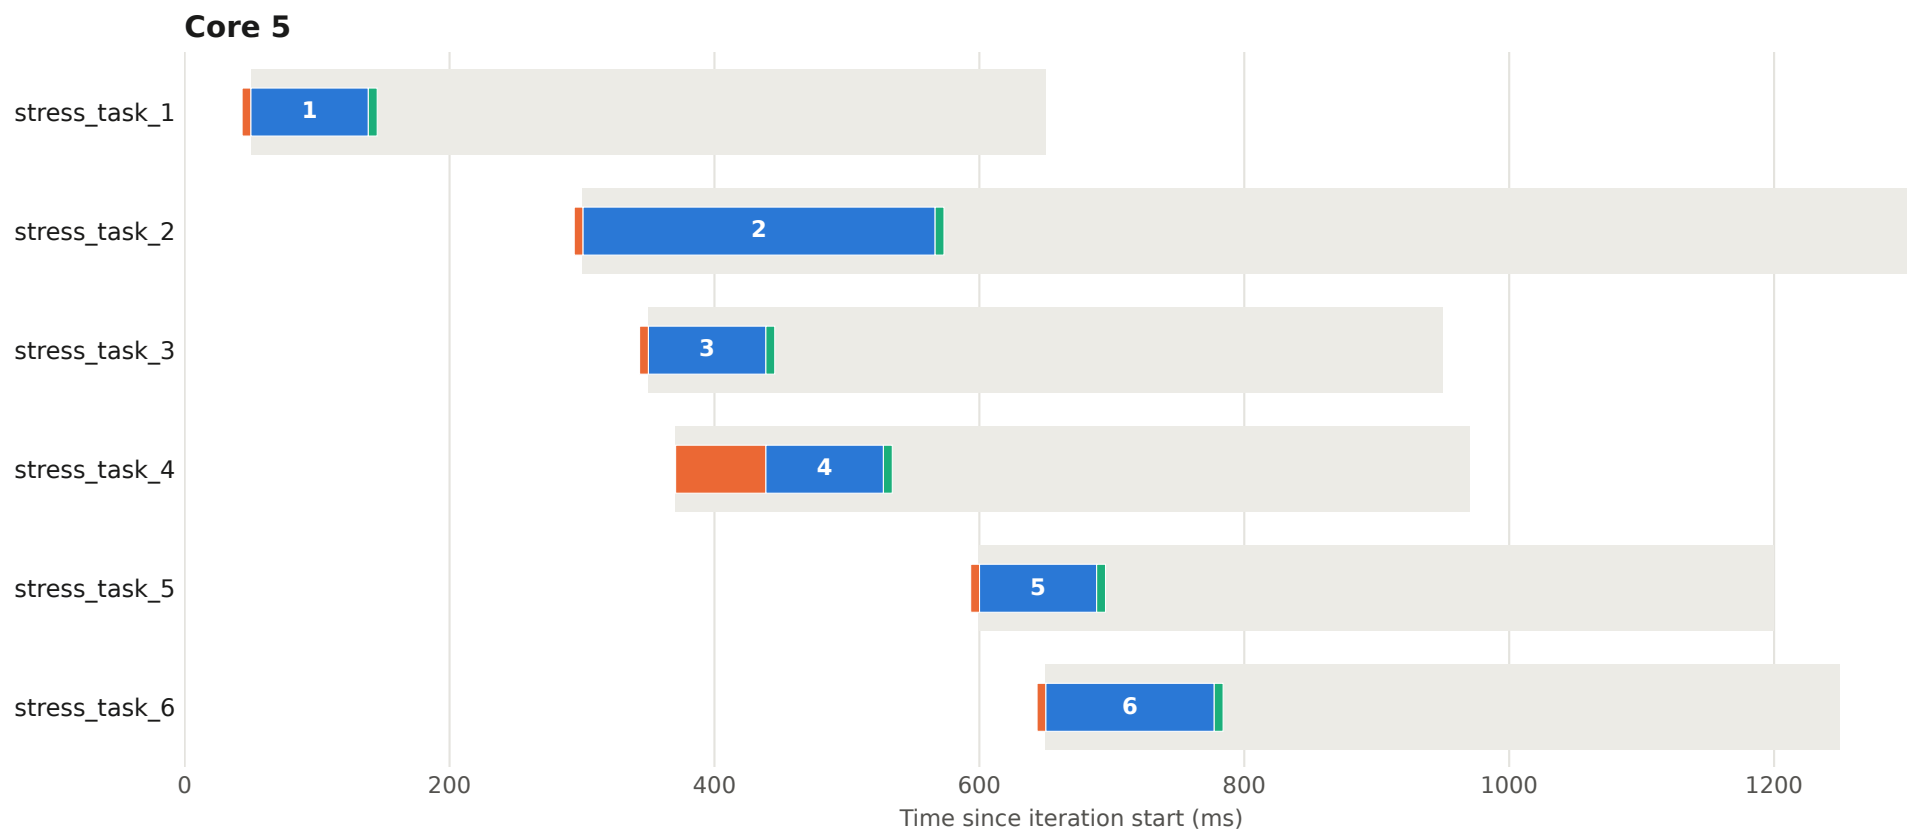


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 53 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

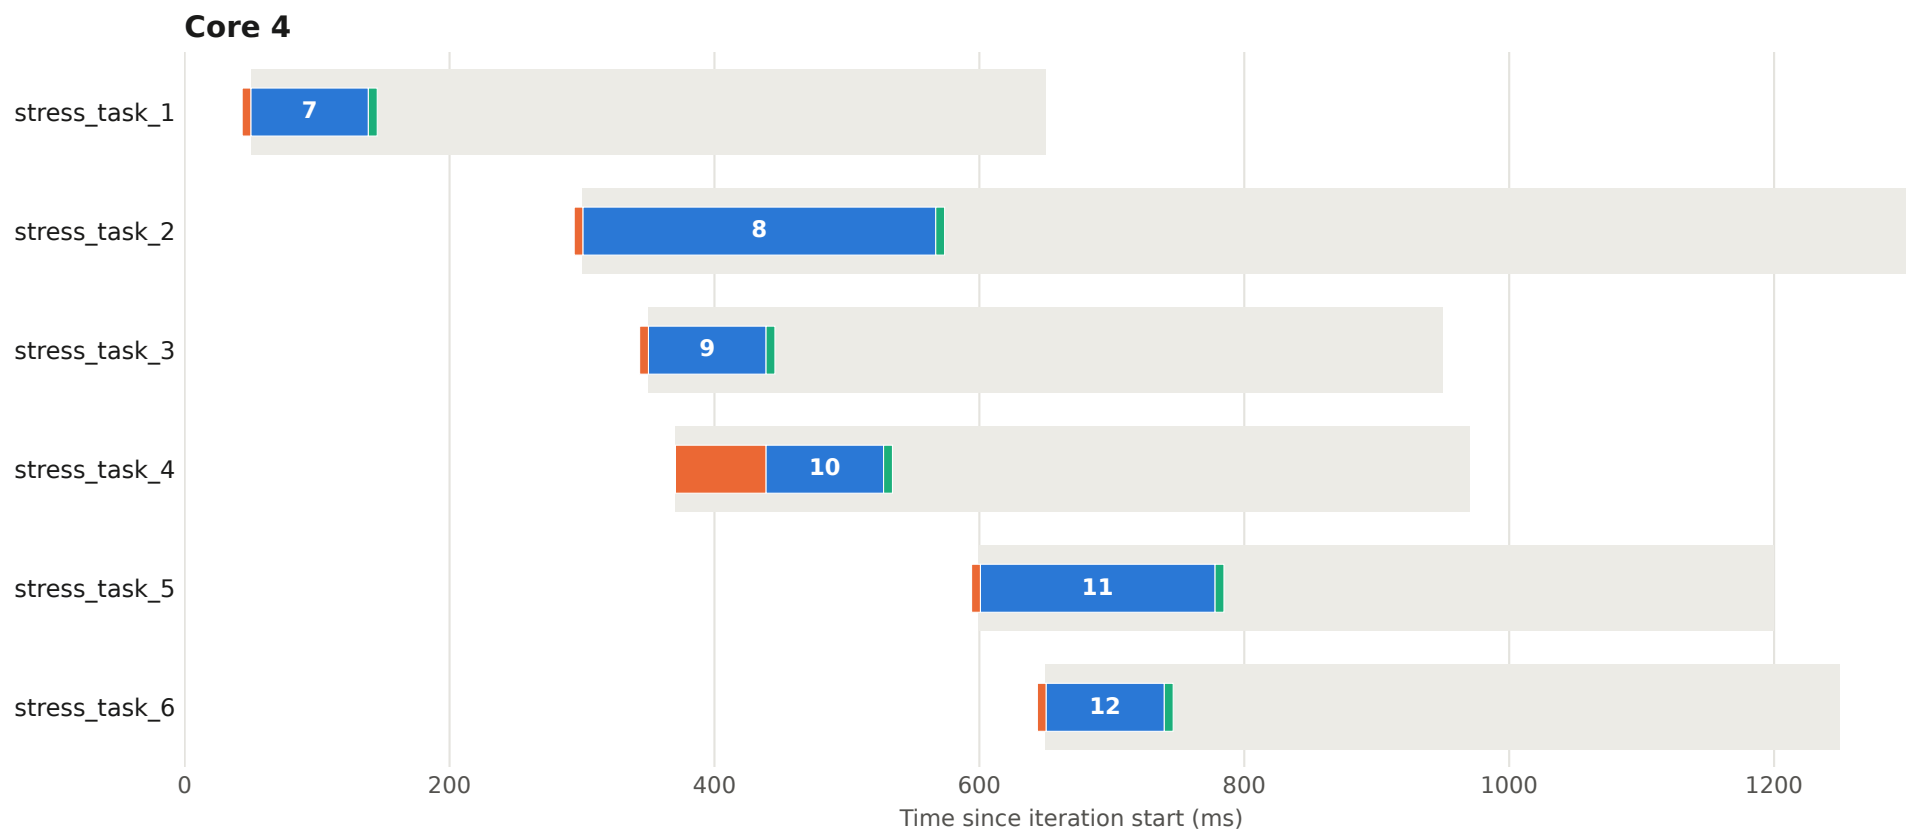


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 53 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

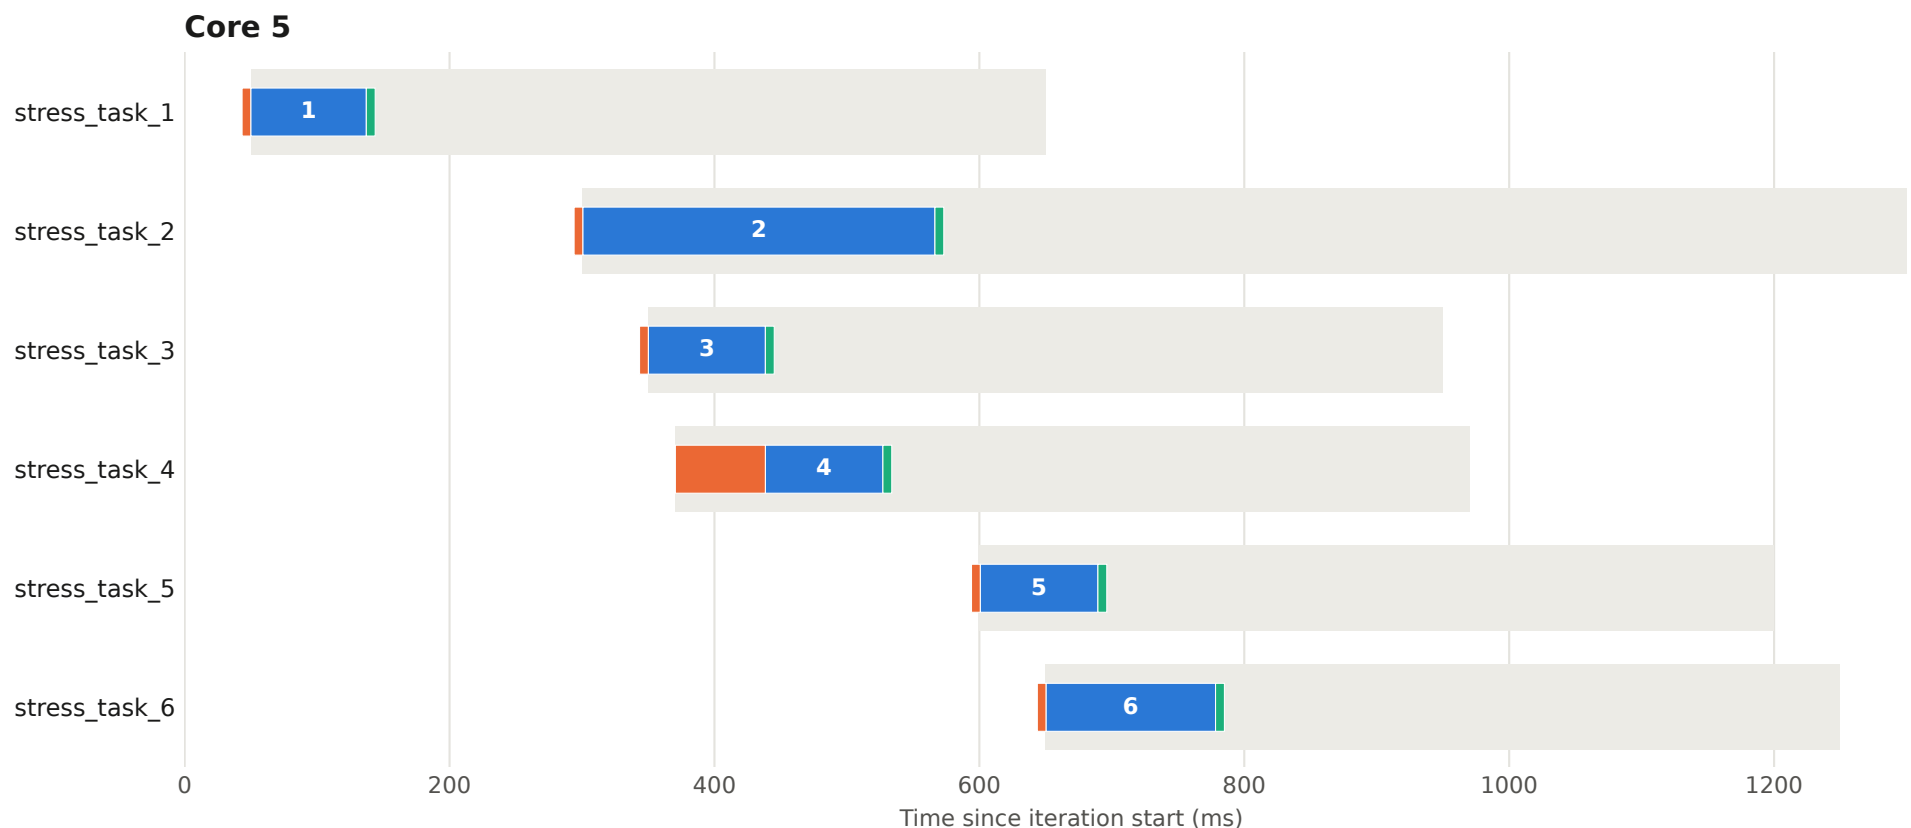


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 54 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

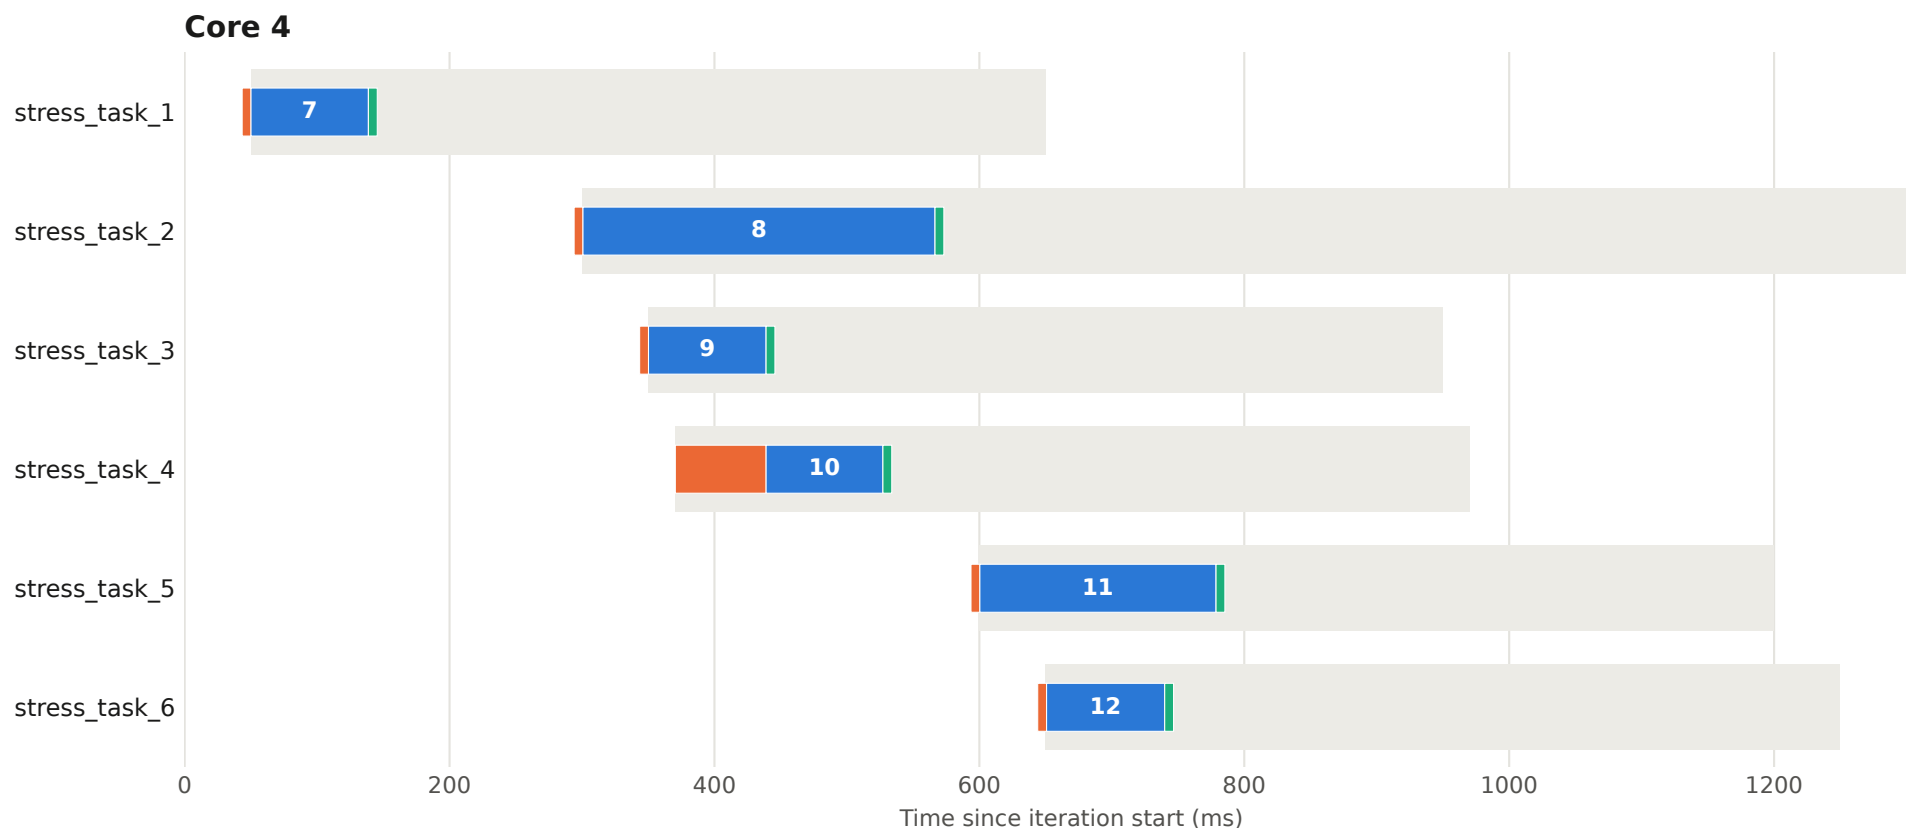


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 54 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

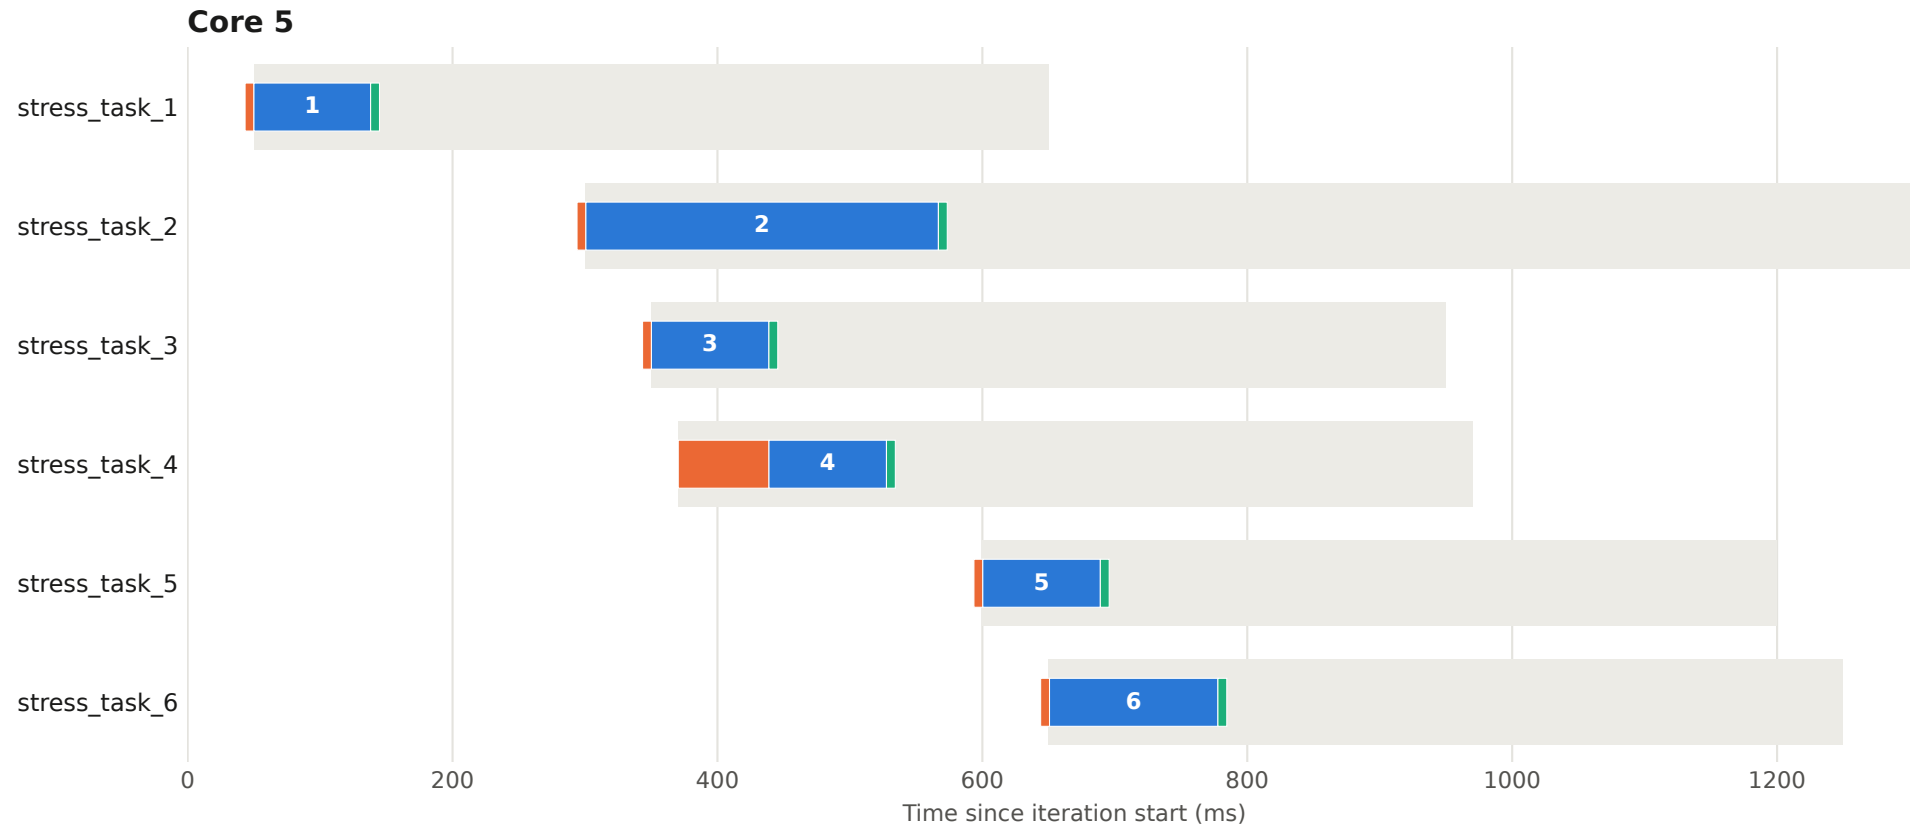


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 55 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

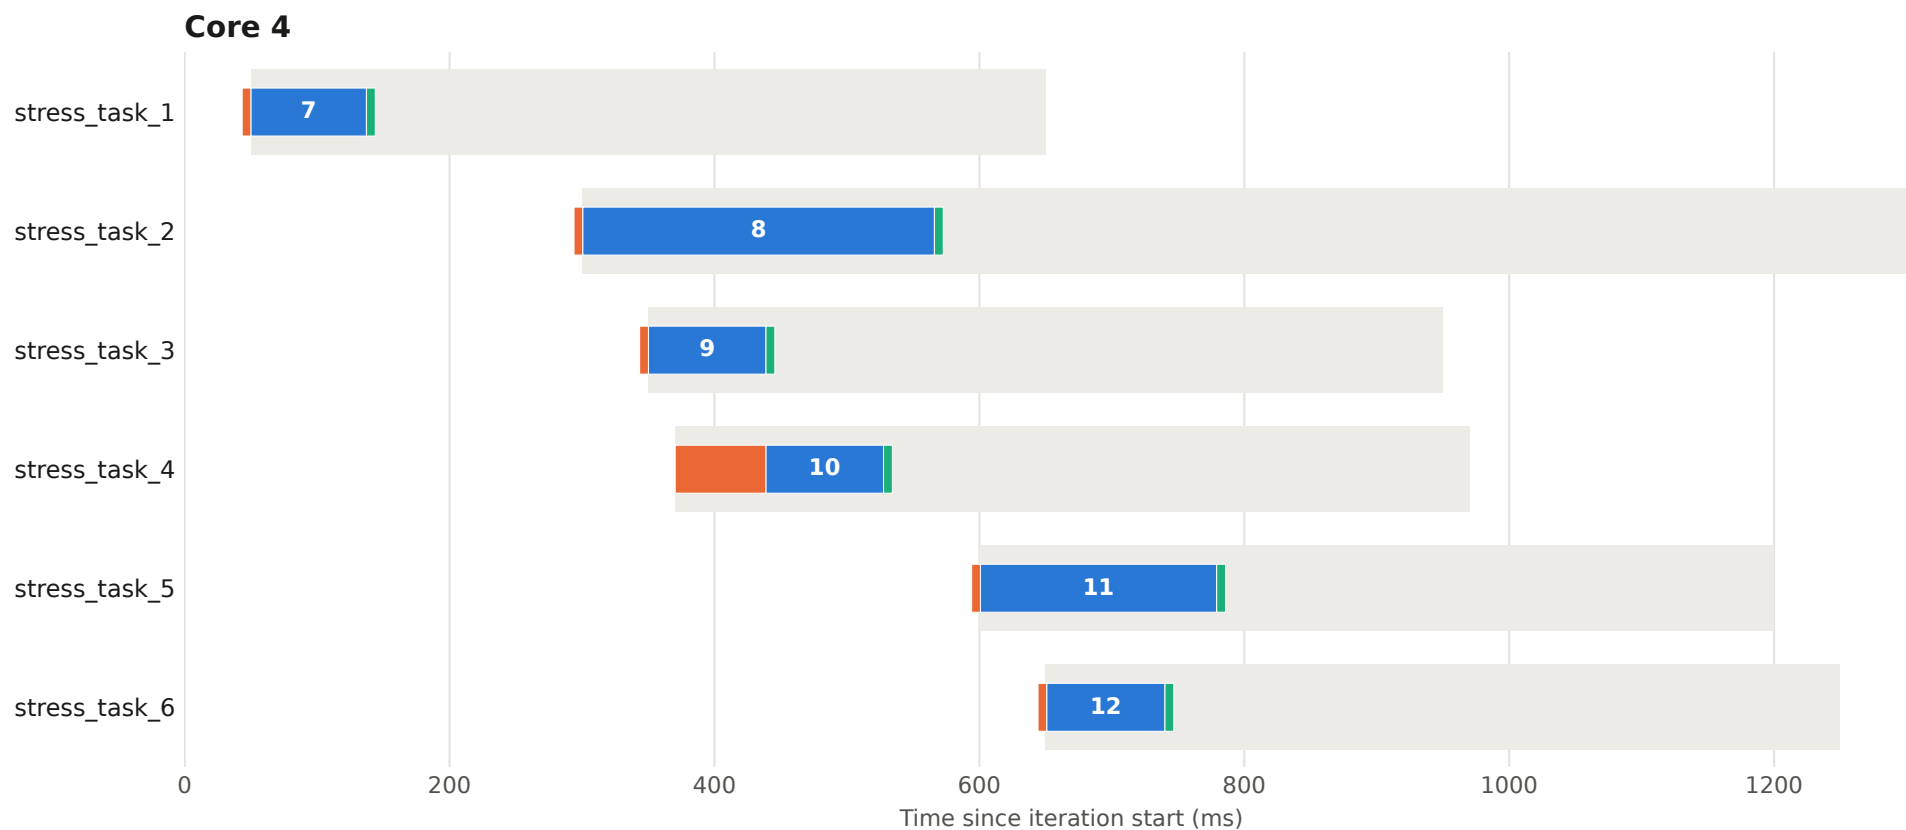


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 55 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

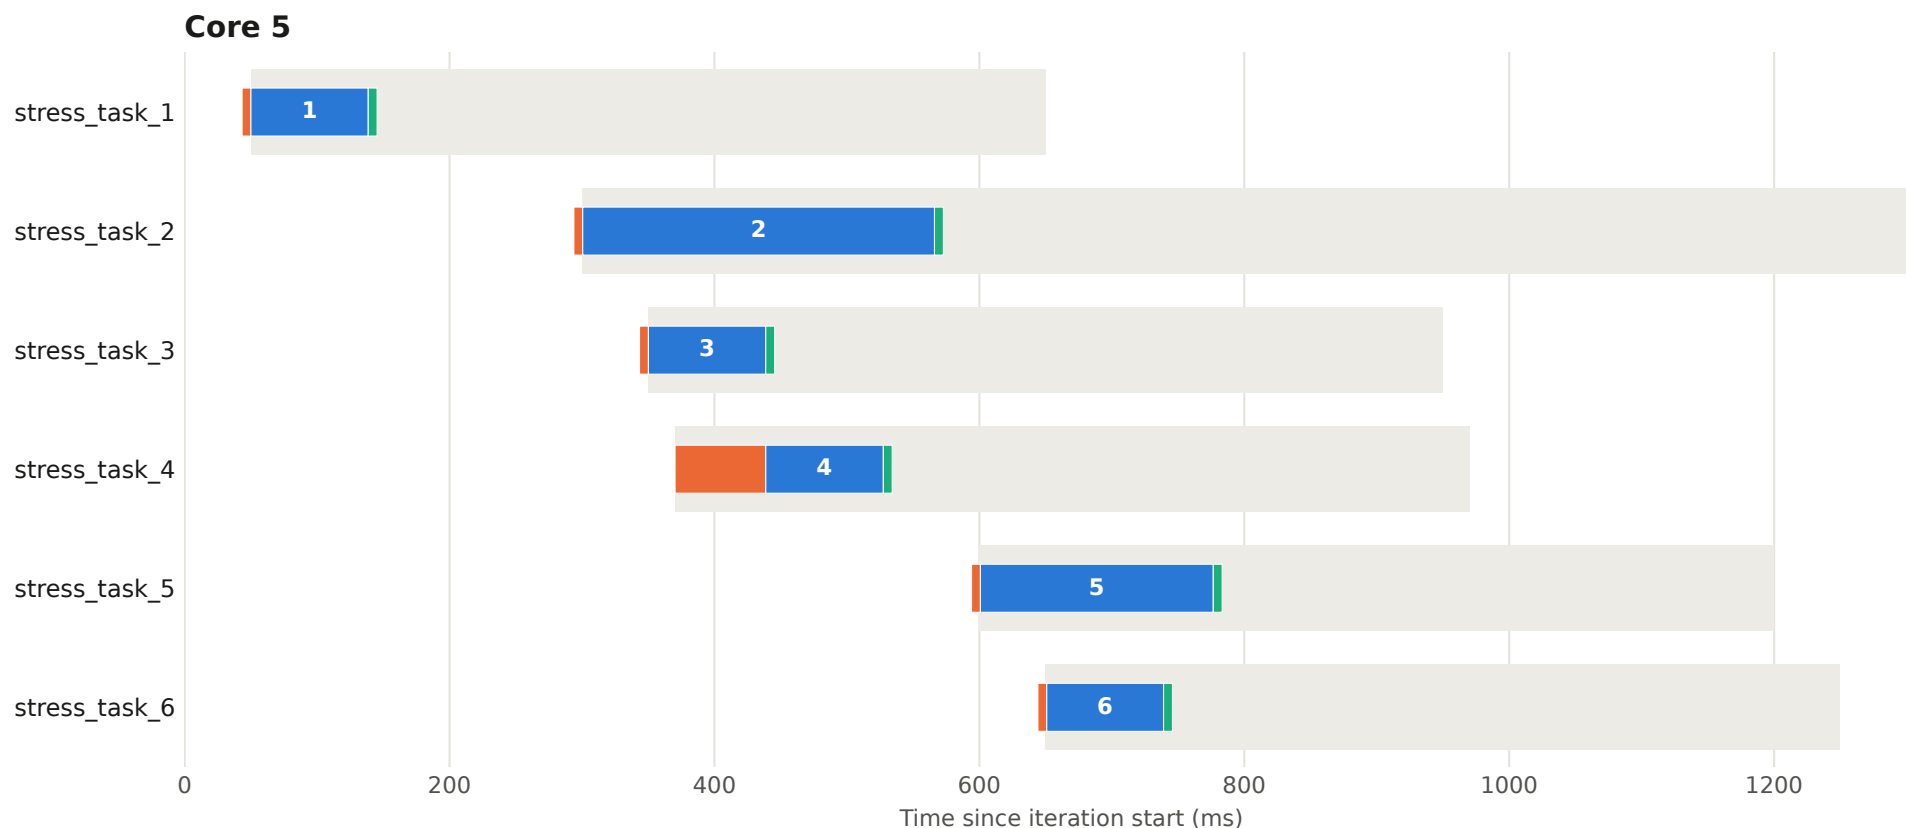


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 56 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

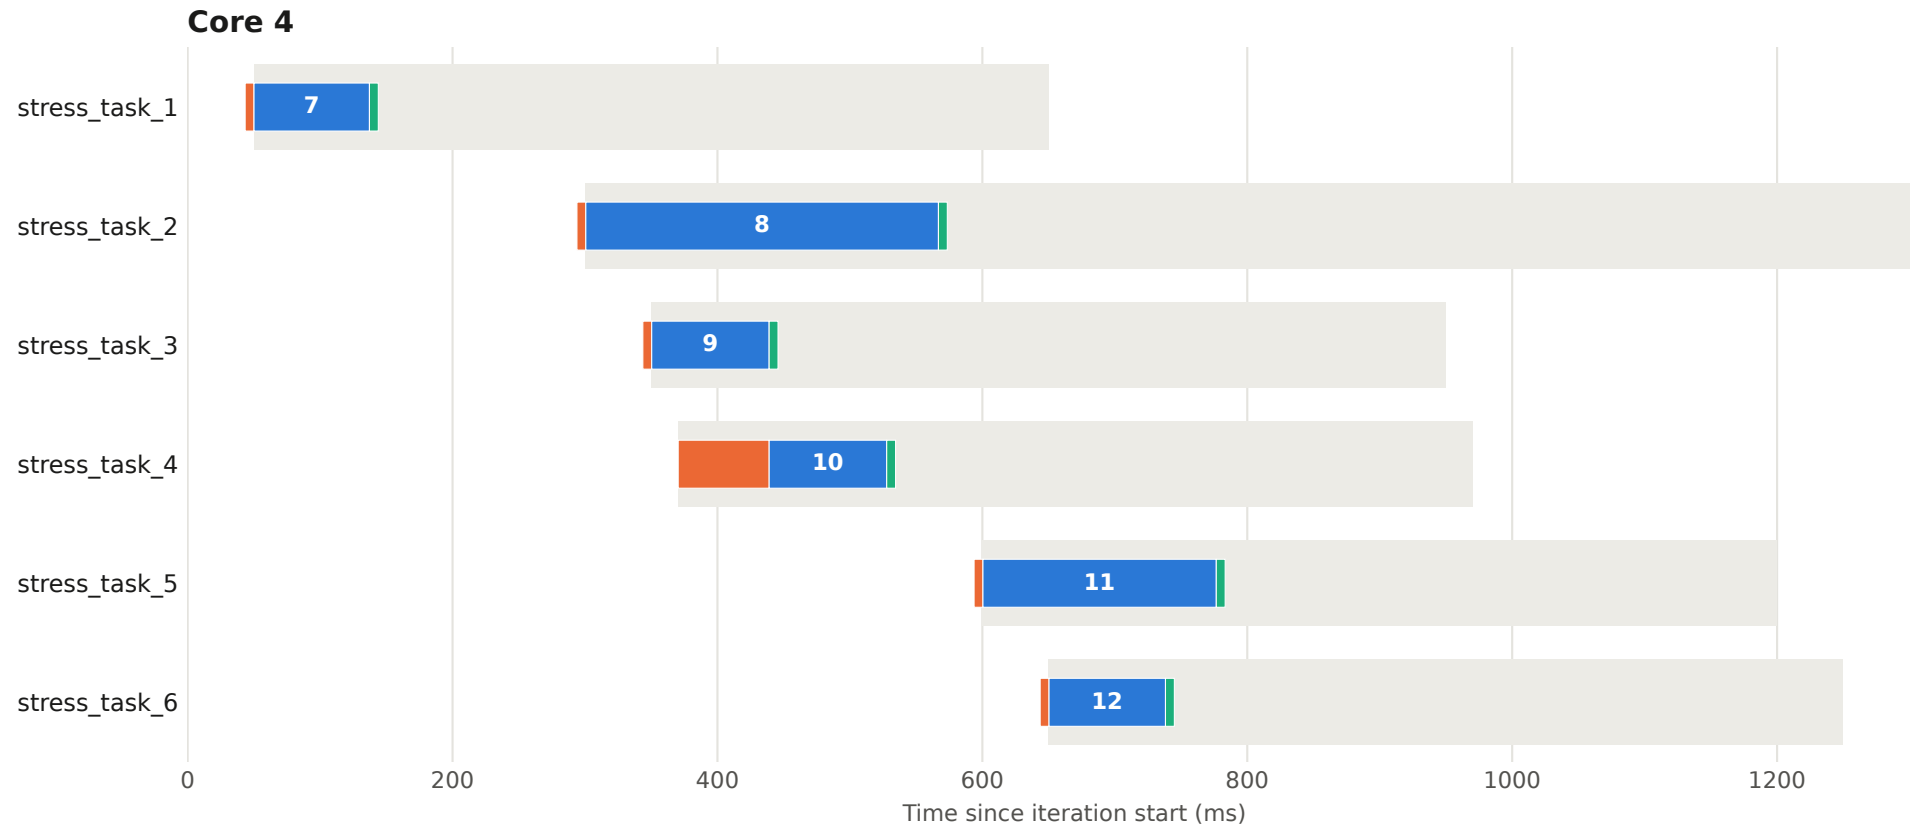


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 56 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

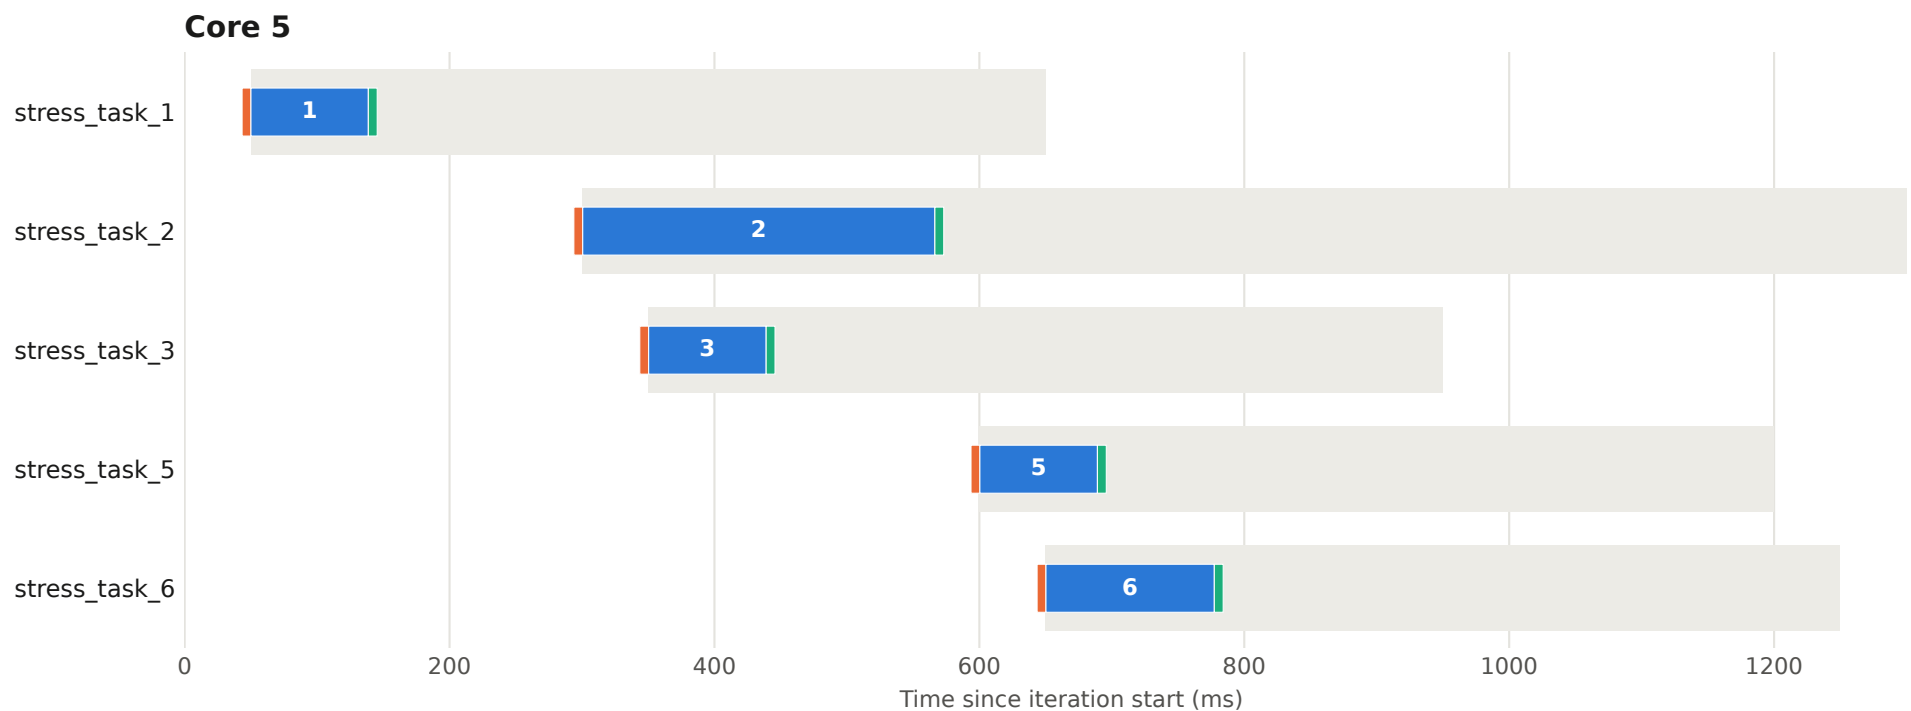


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 57 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

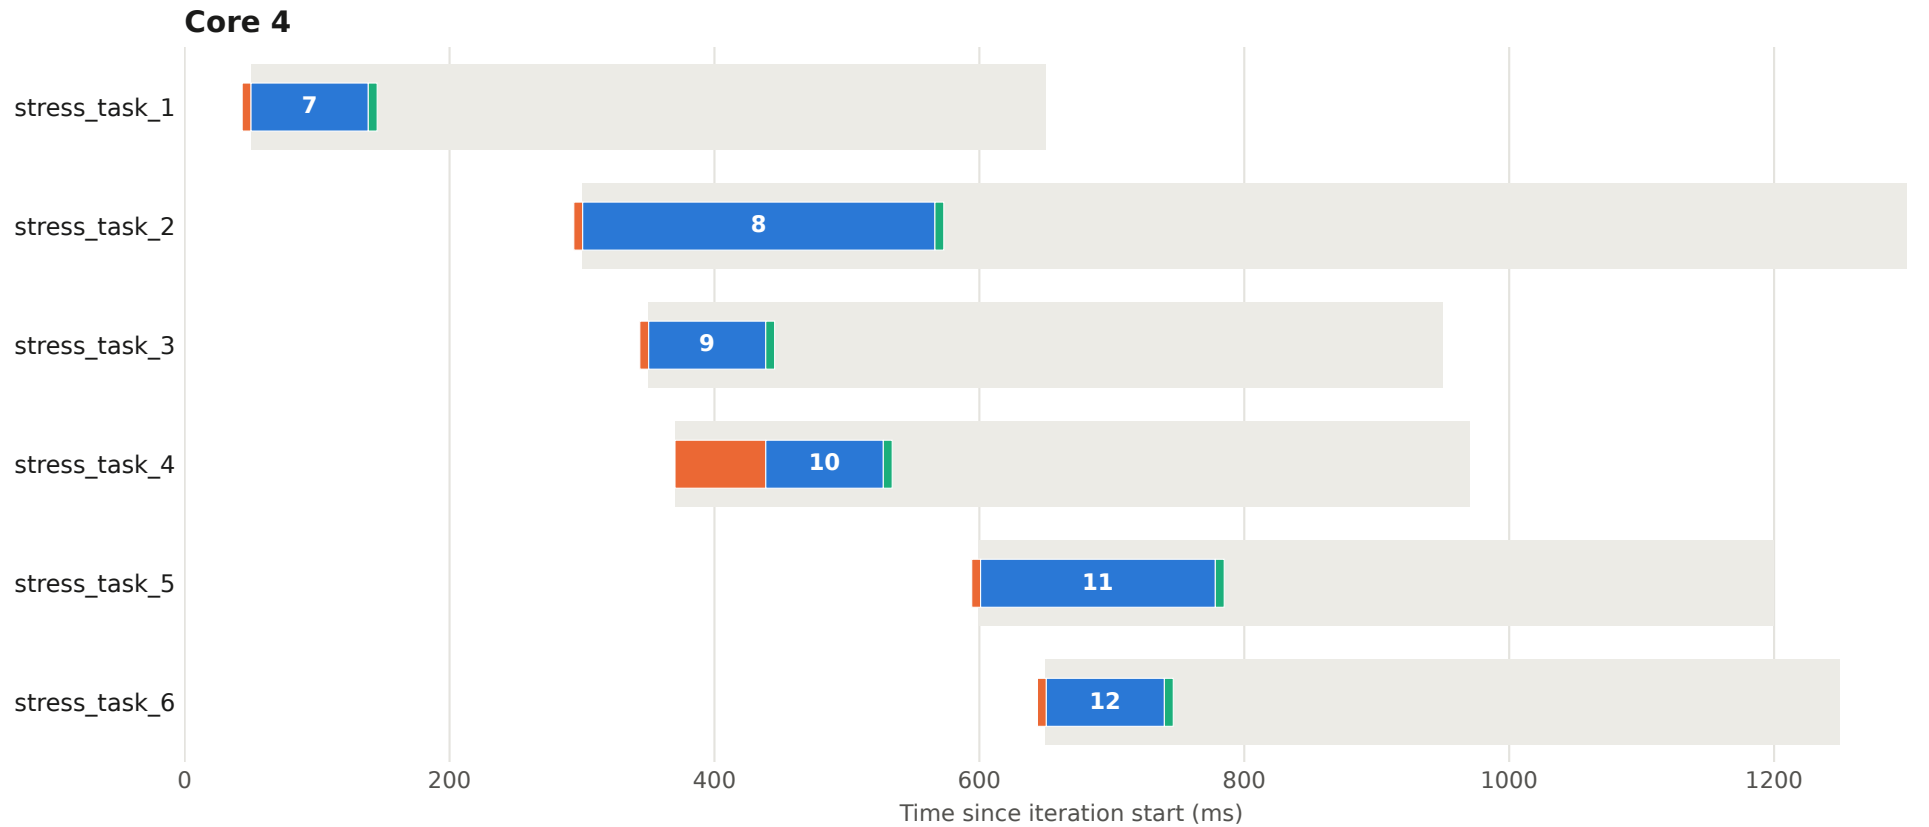


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 57 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

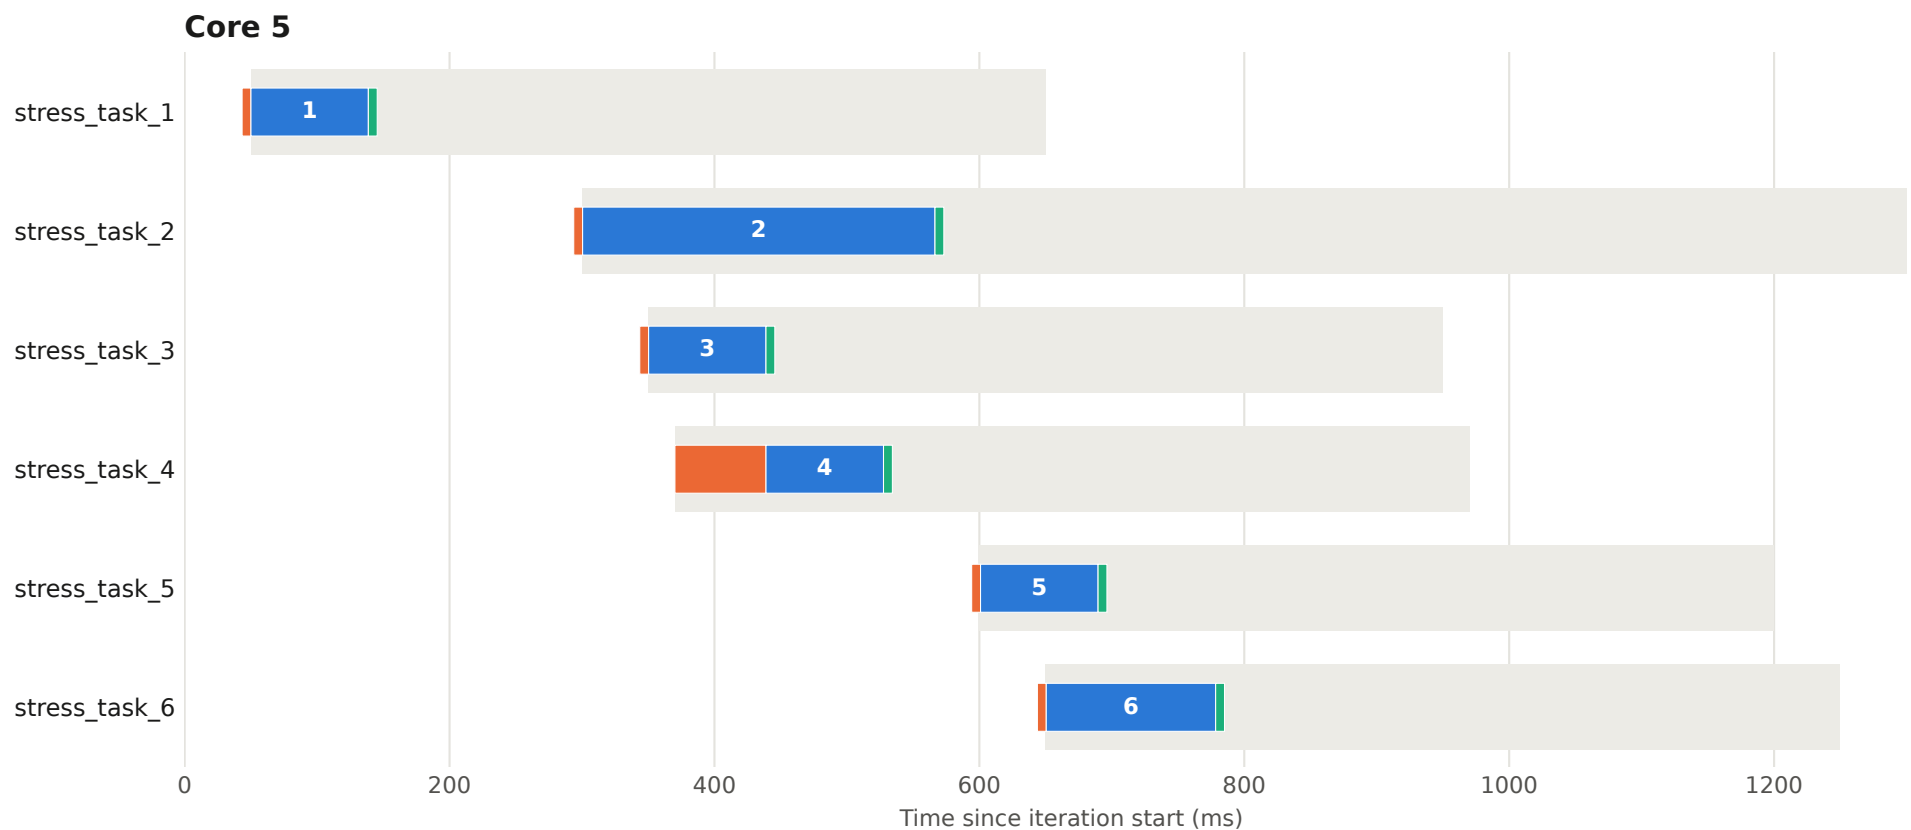


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 58 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

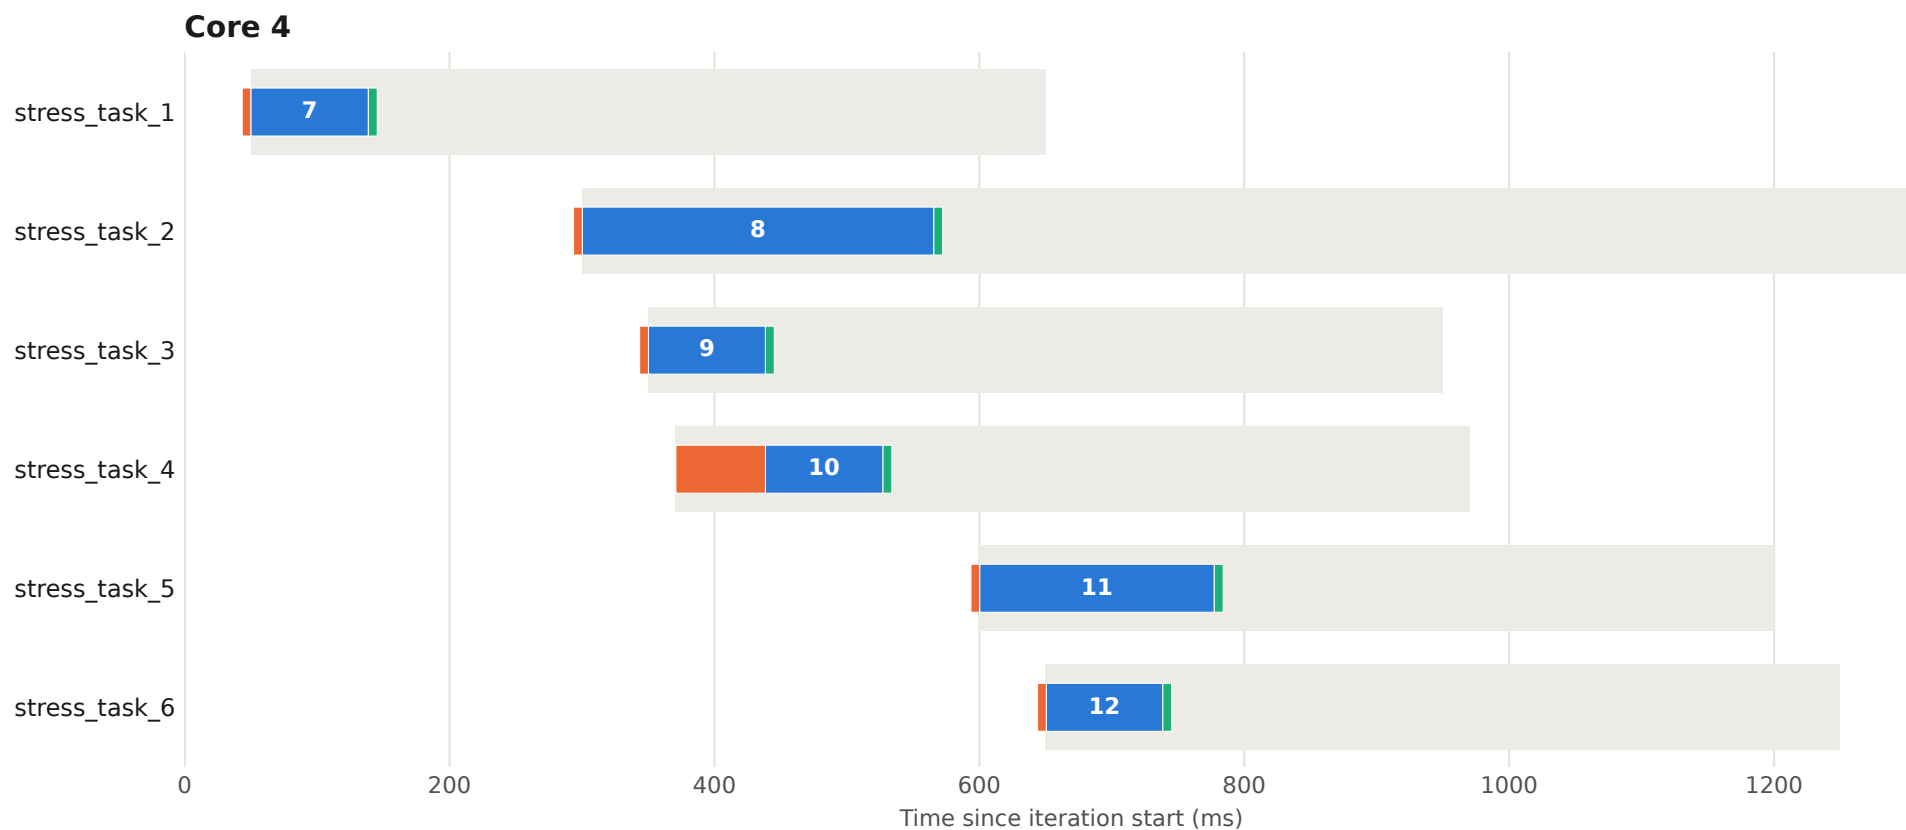


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 58 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

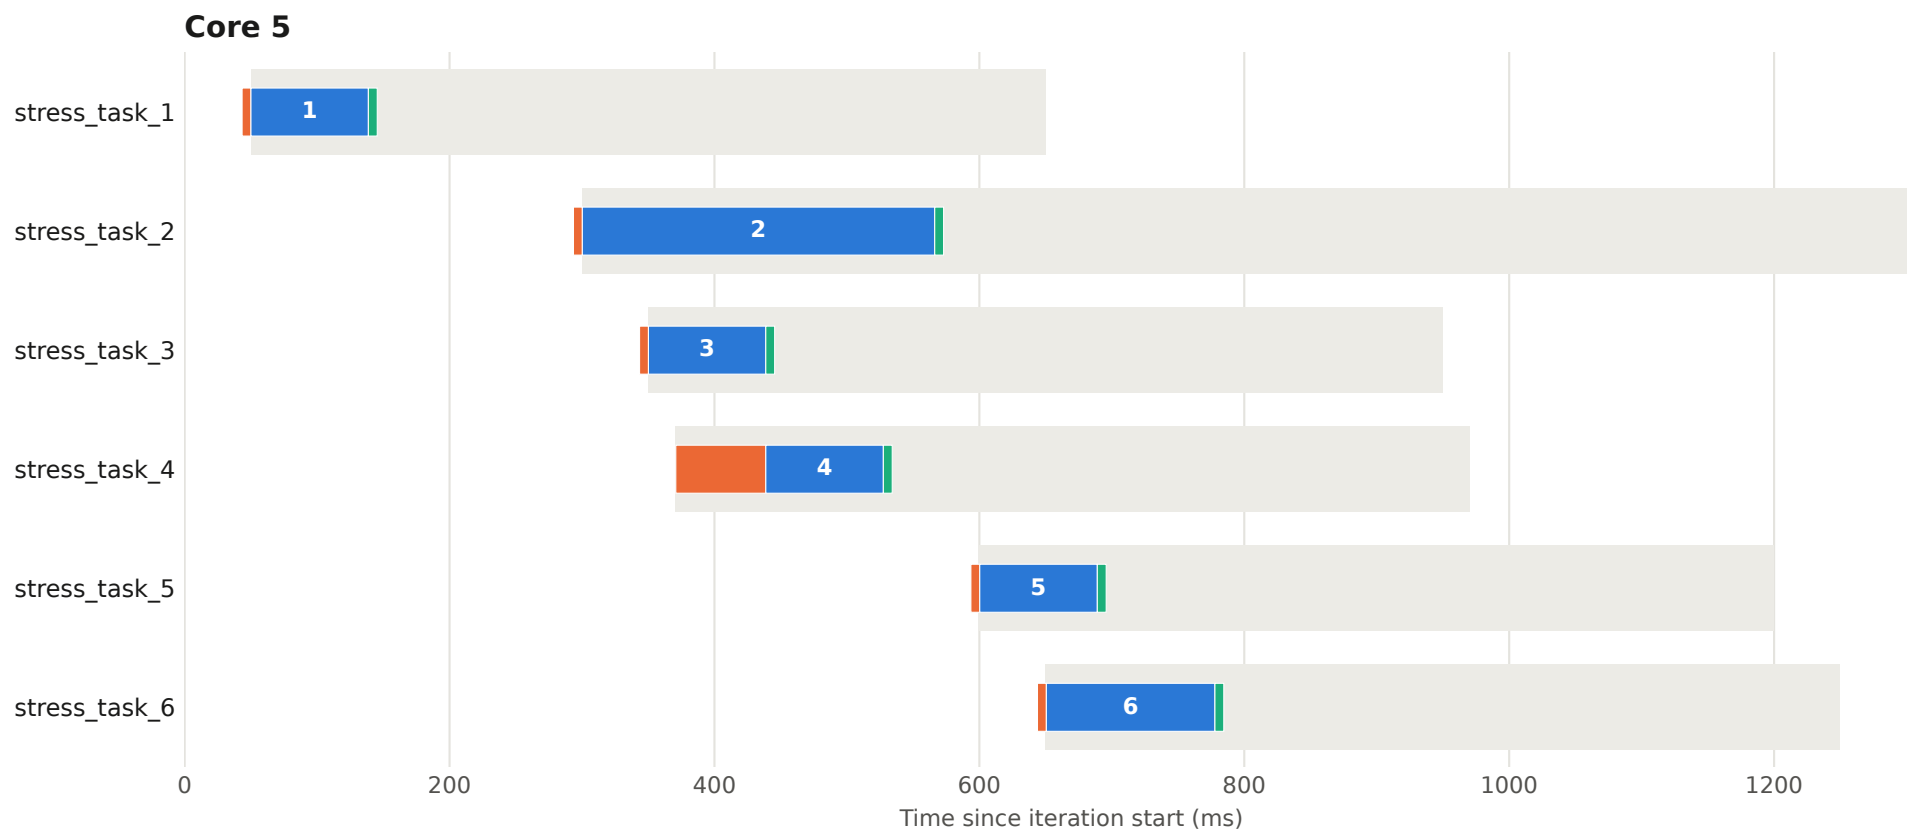


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 59 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

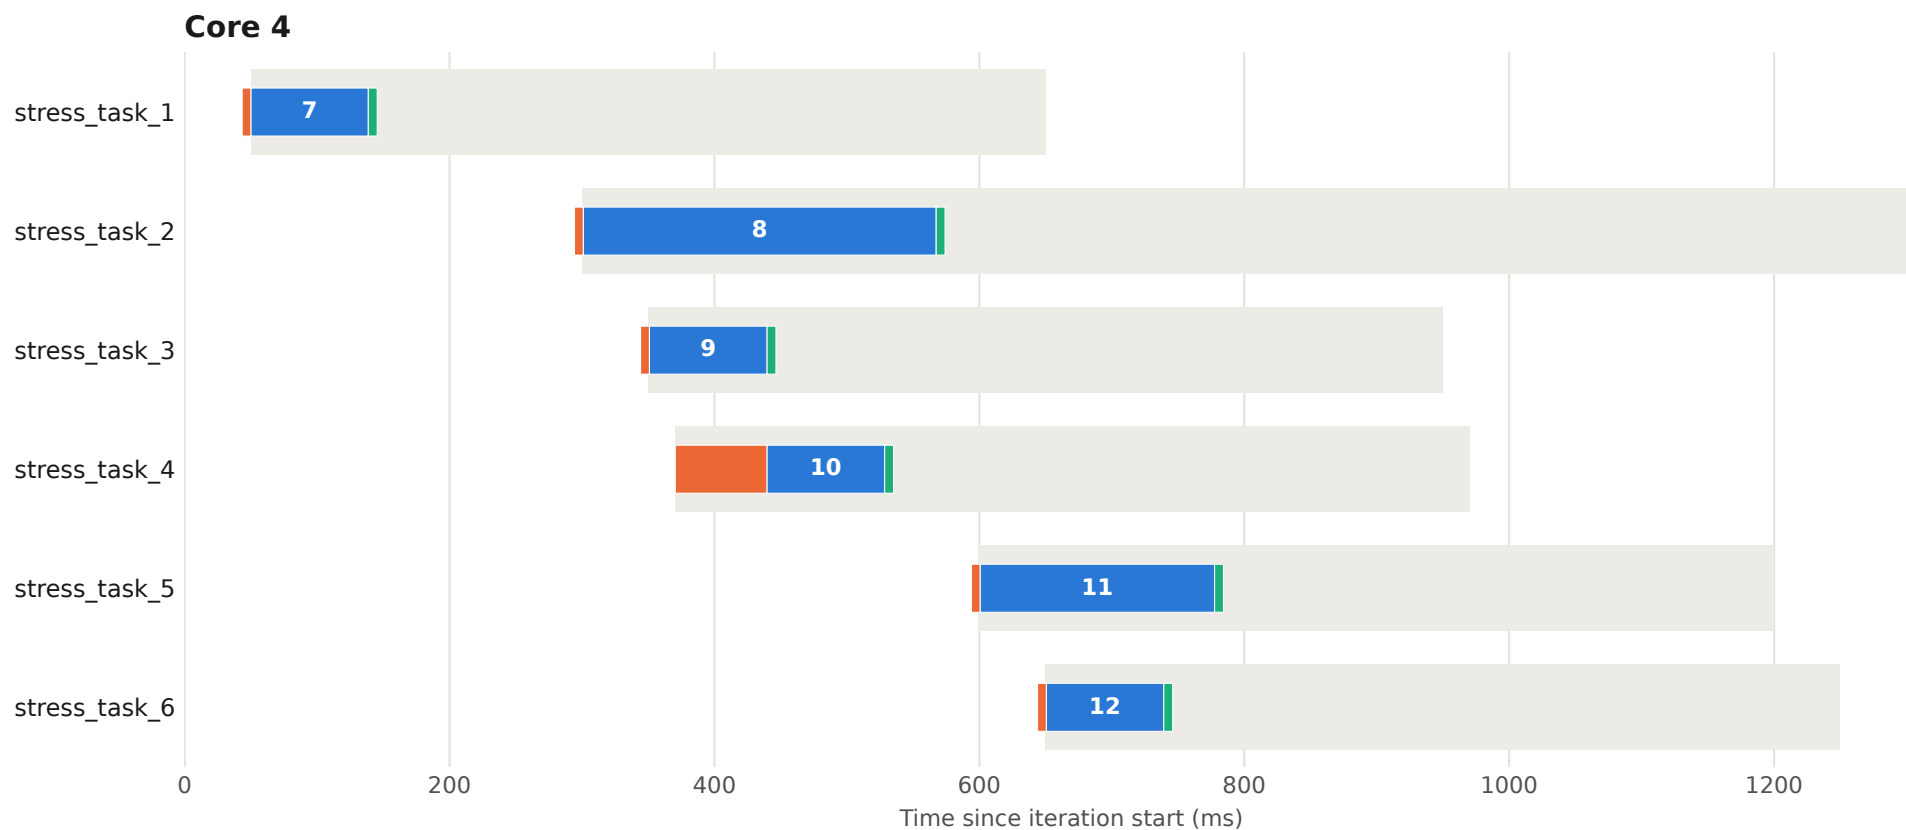


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 59 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

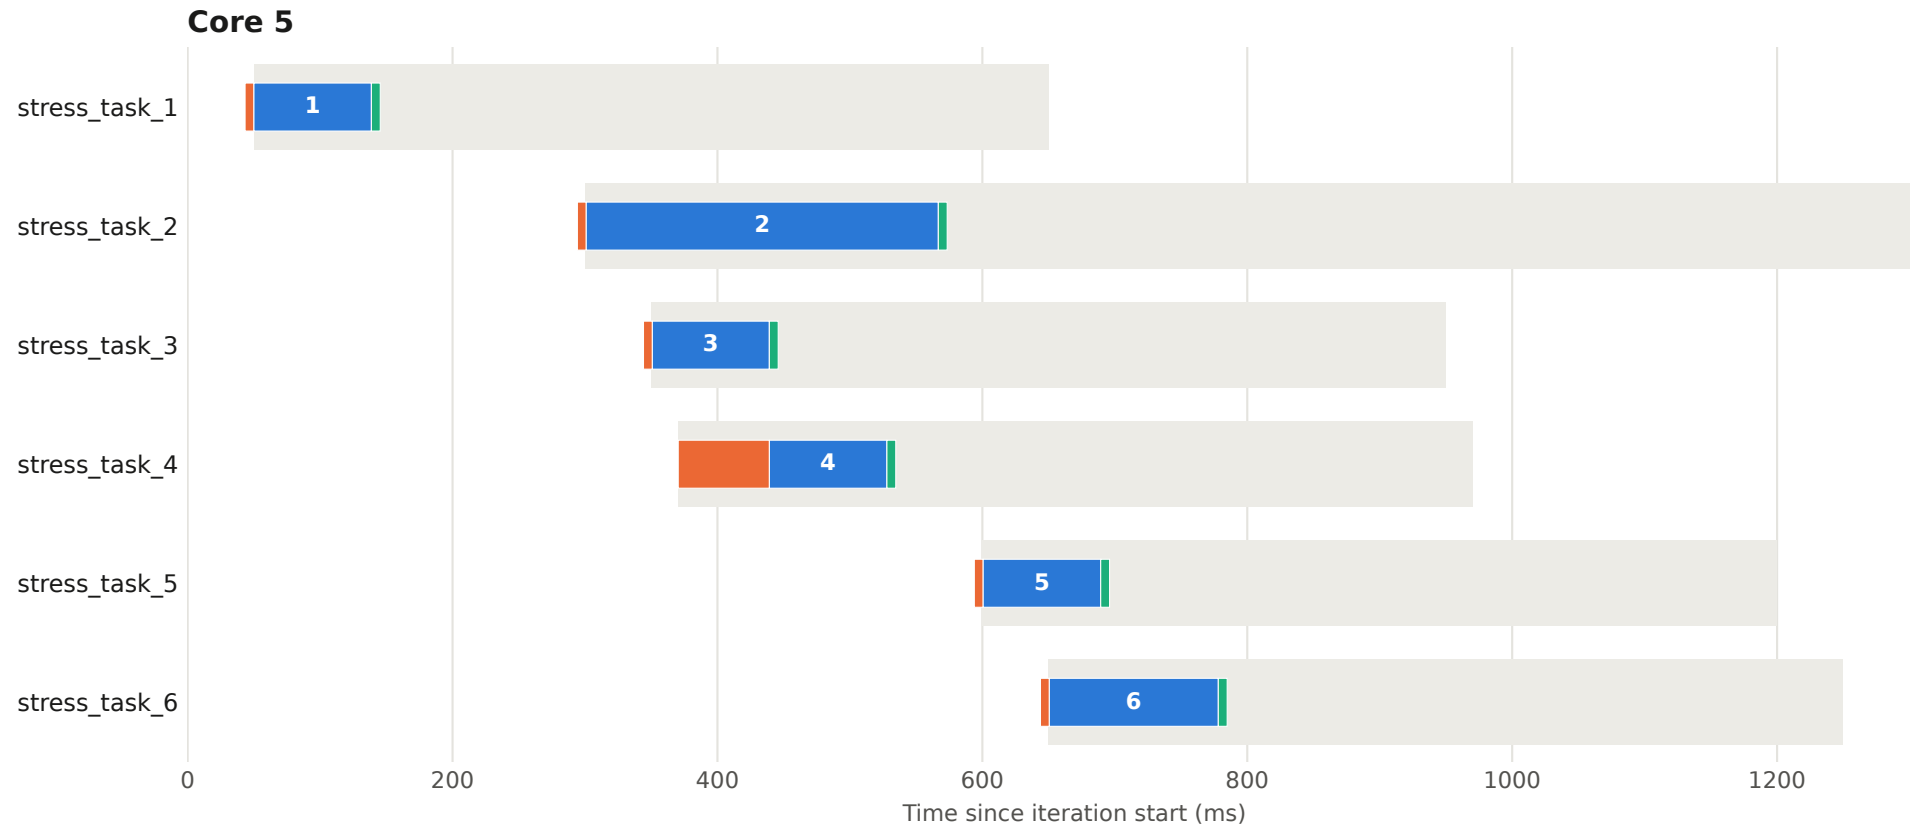


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 60 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

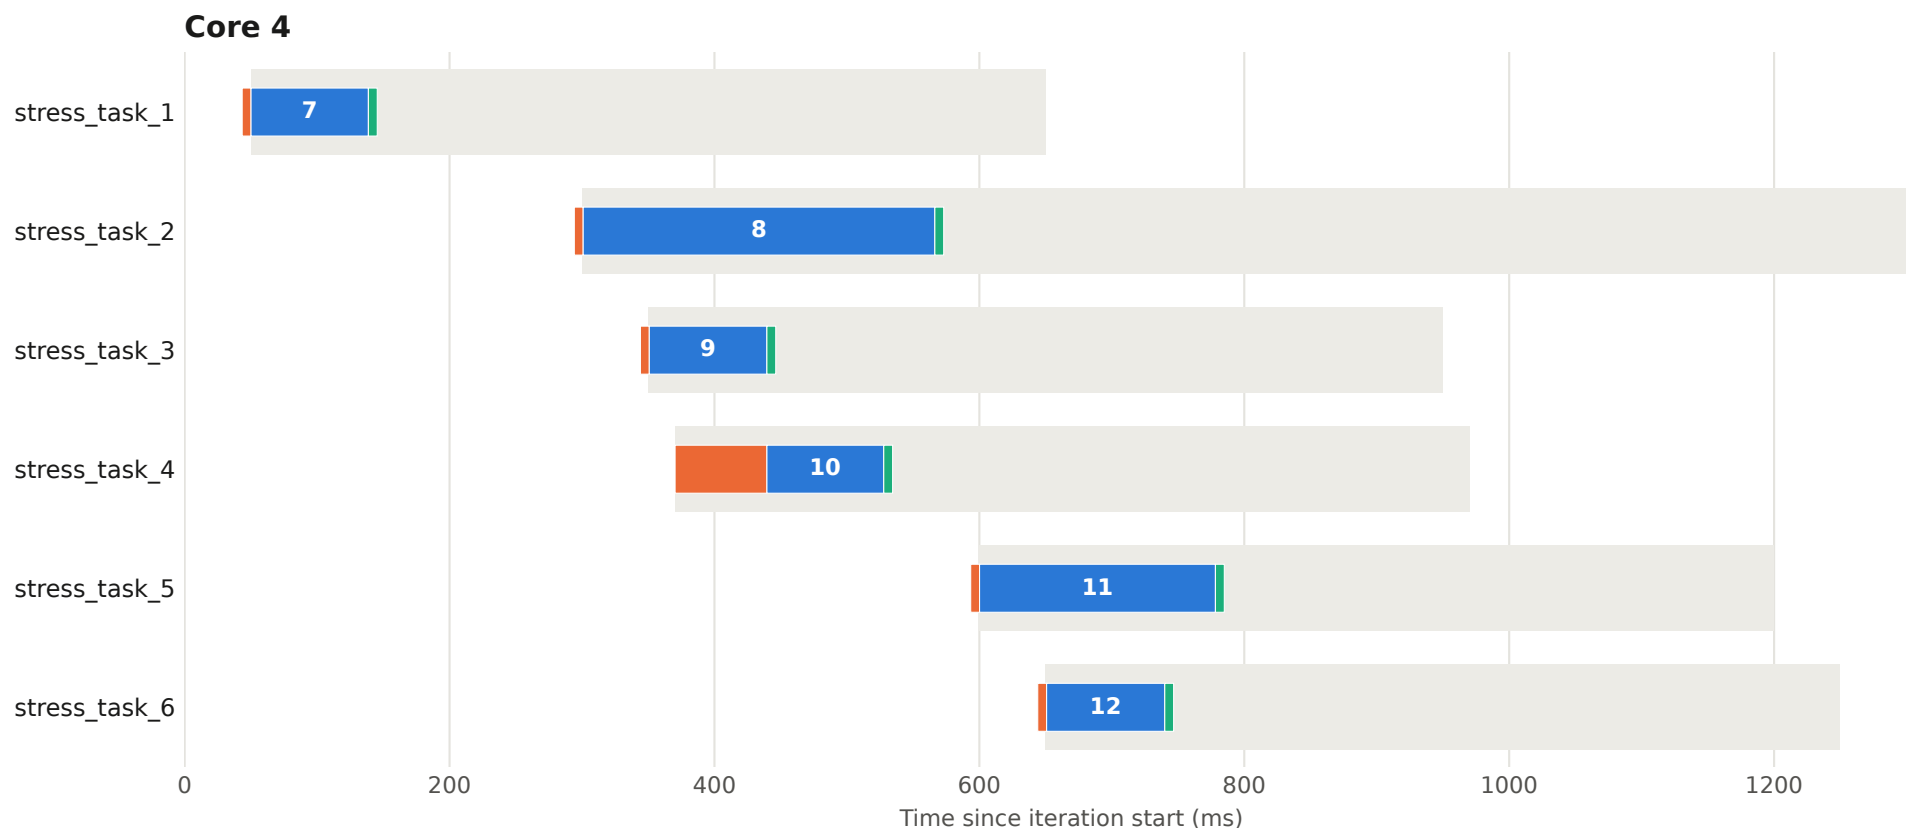


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 60 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

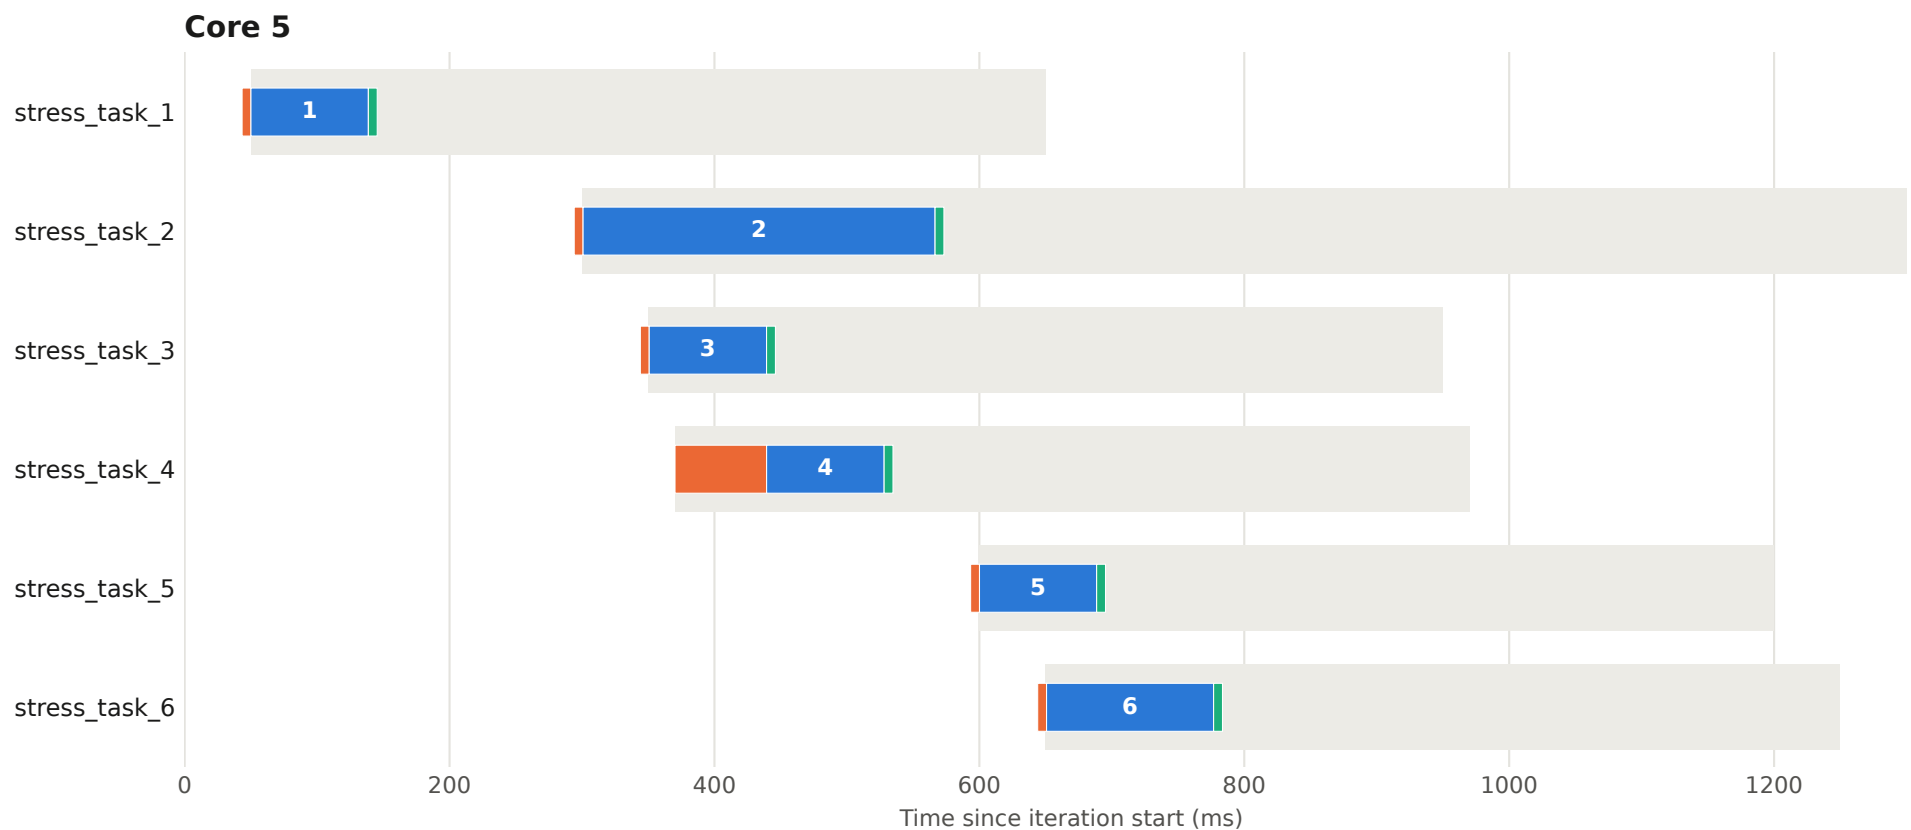


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 61 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

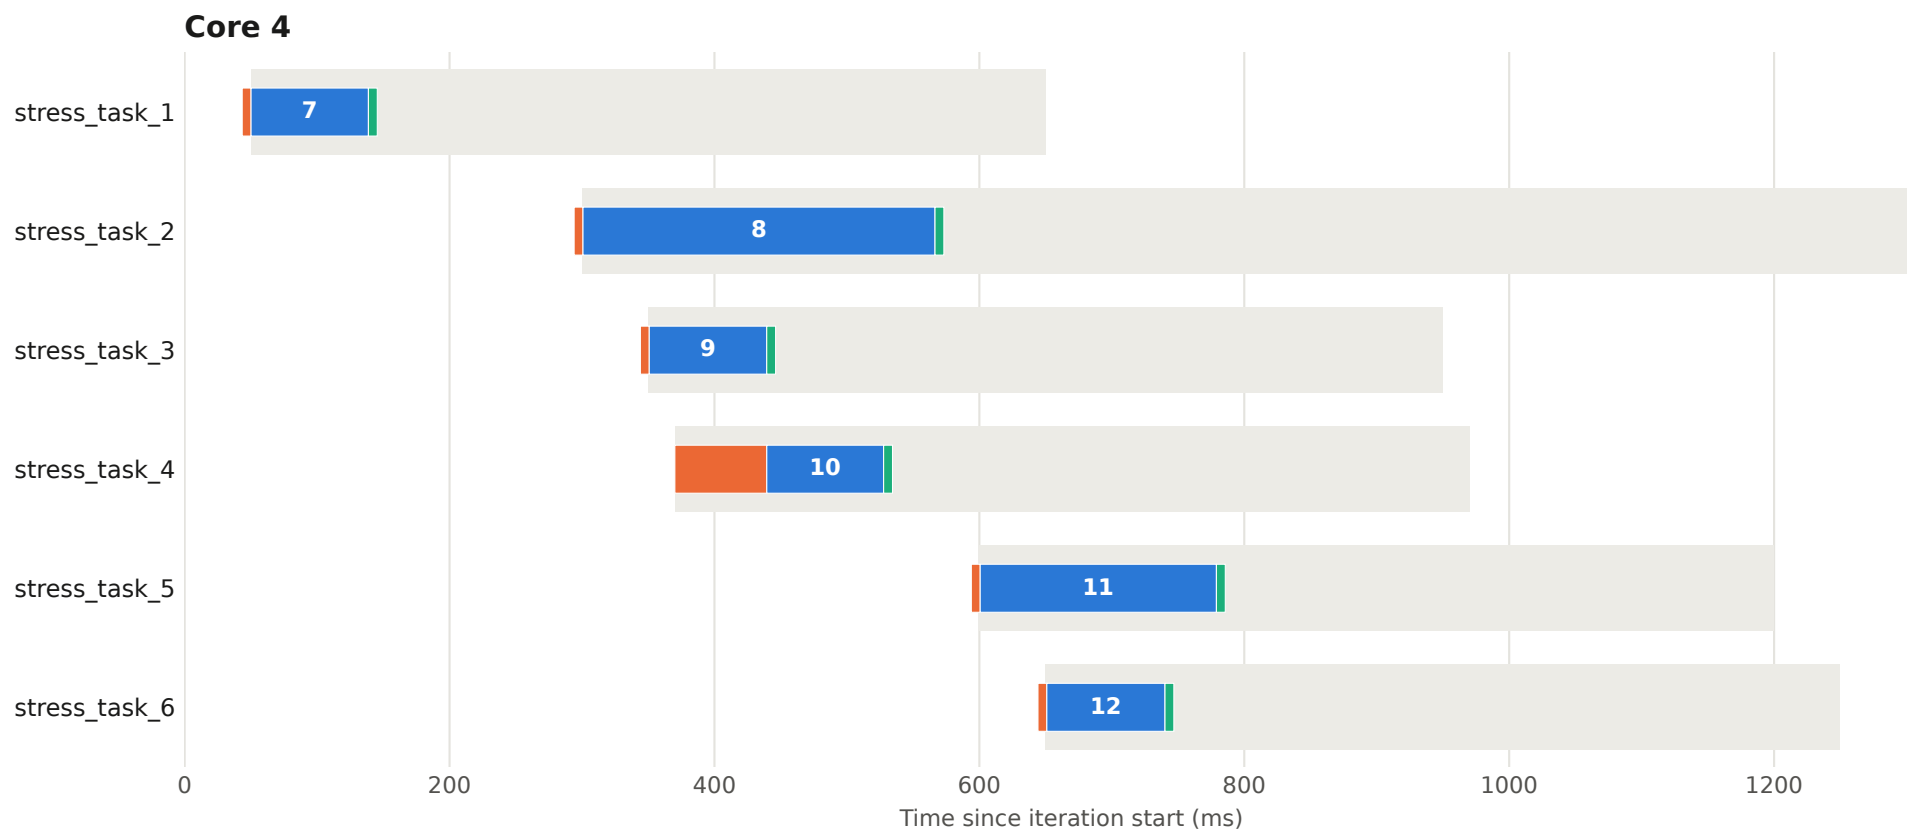


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 61 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

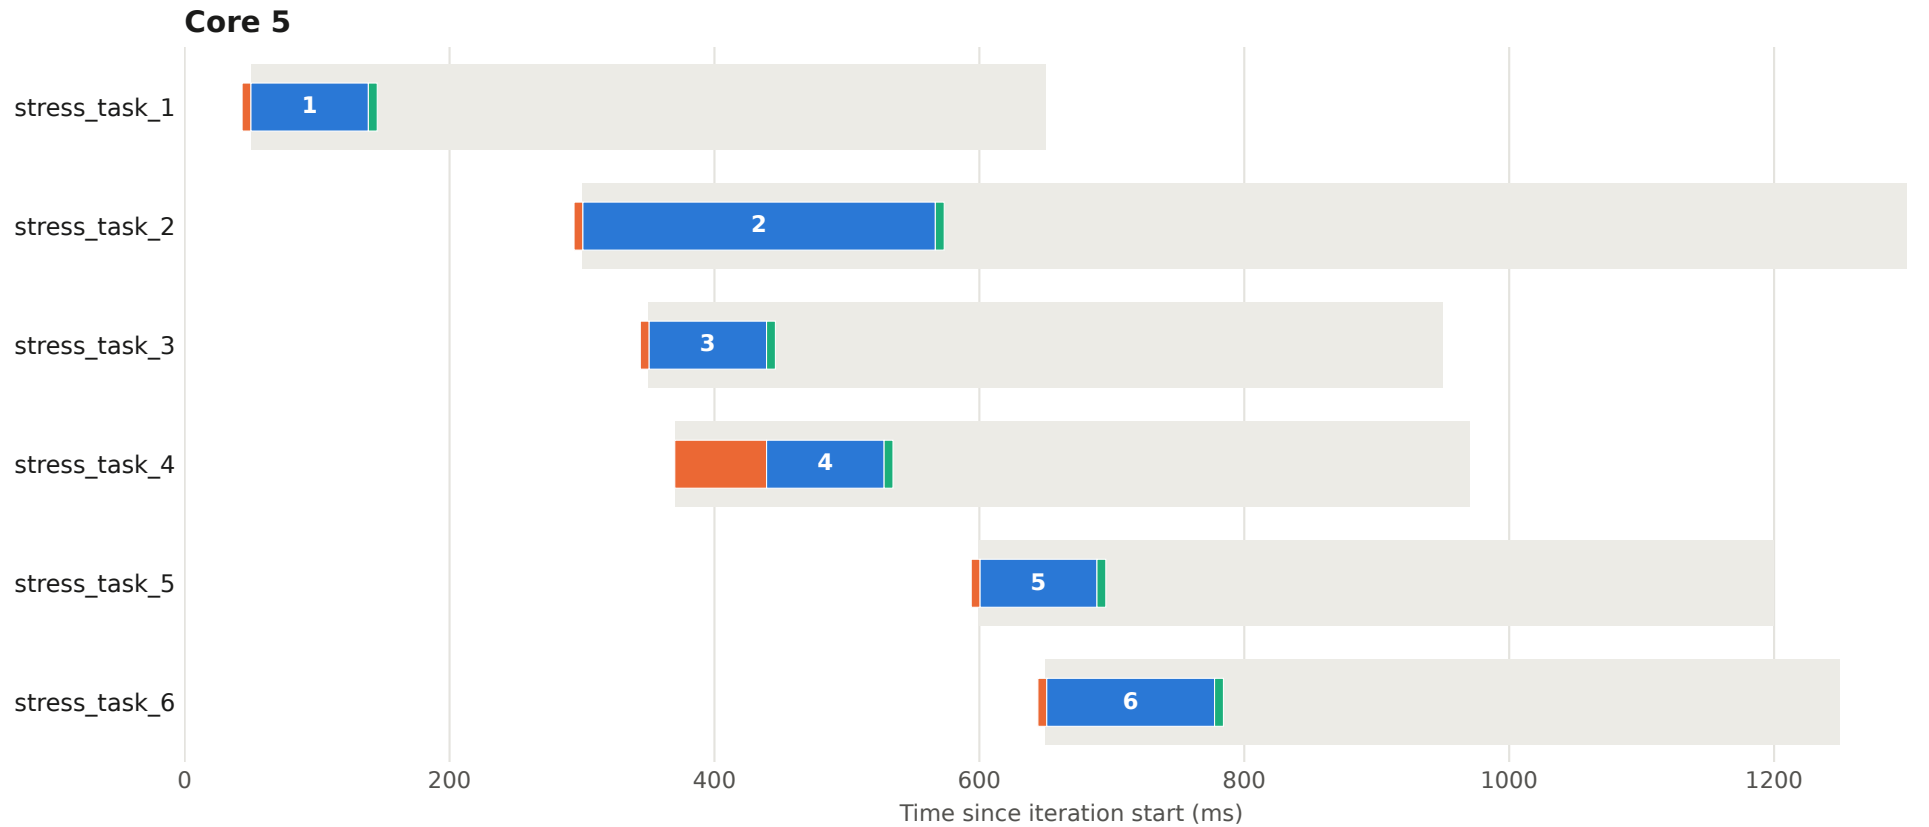


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 62 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

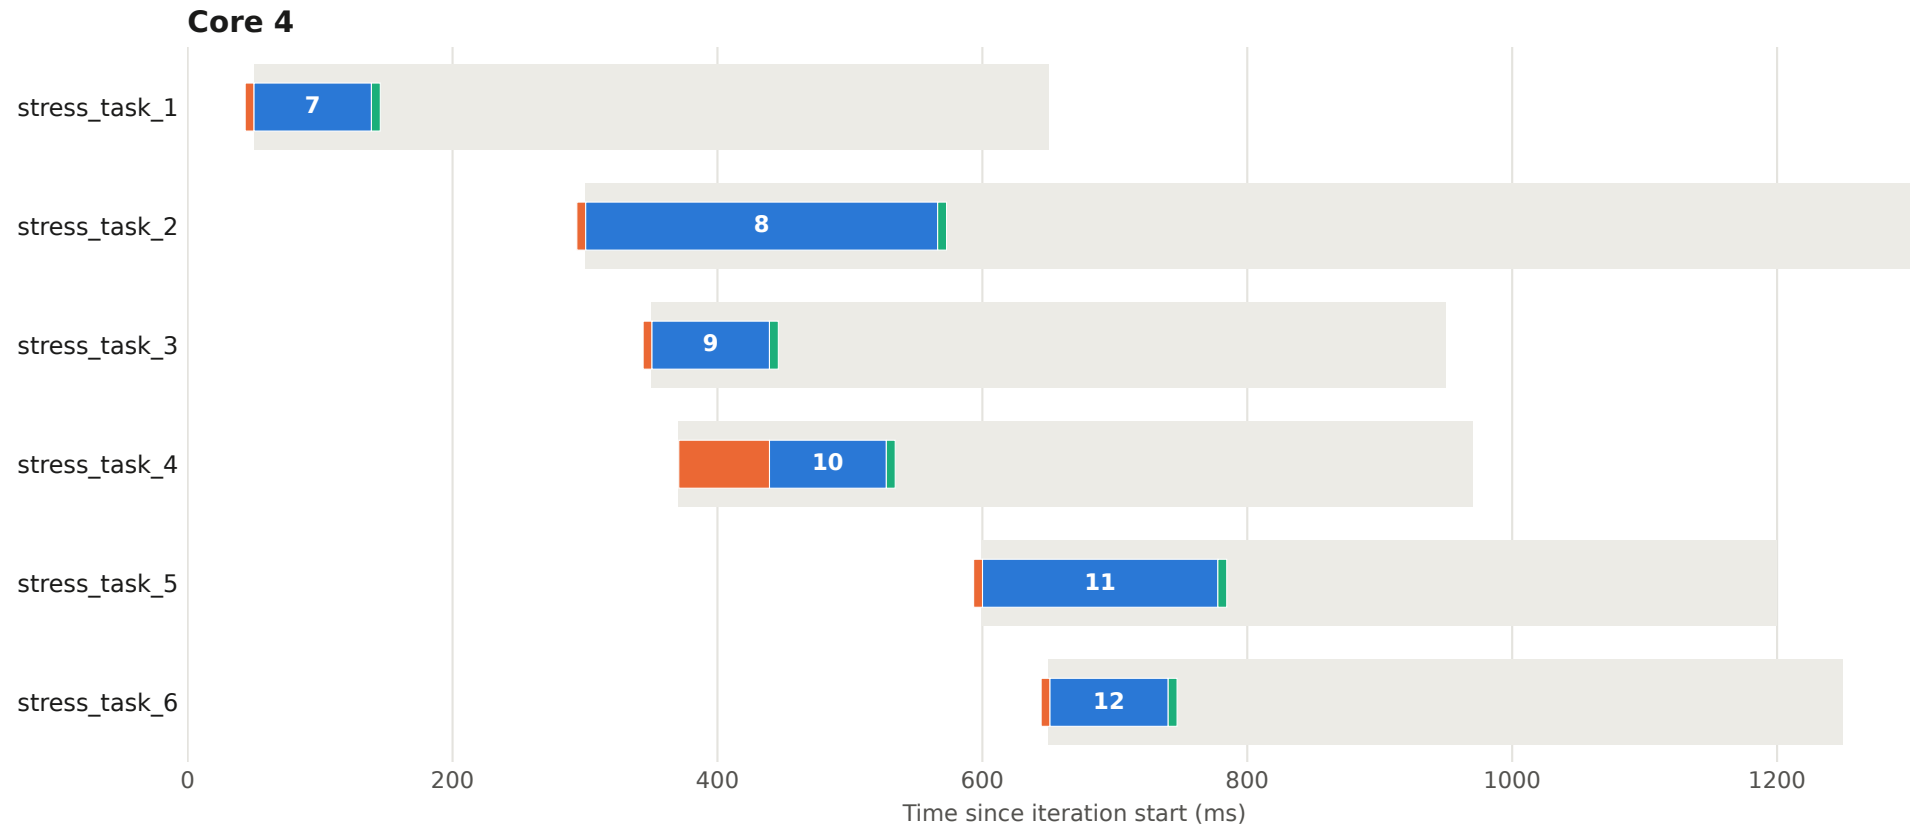


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 62 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

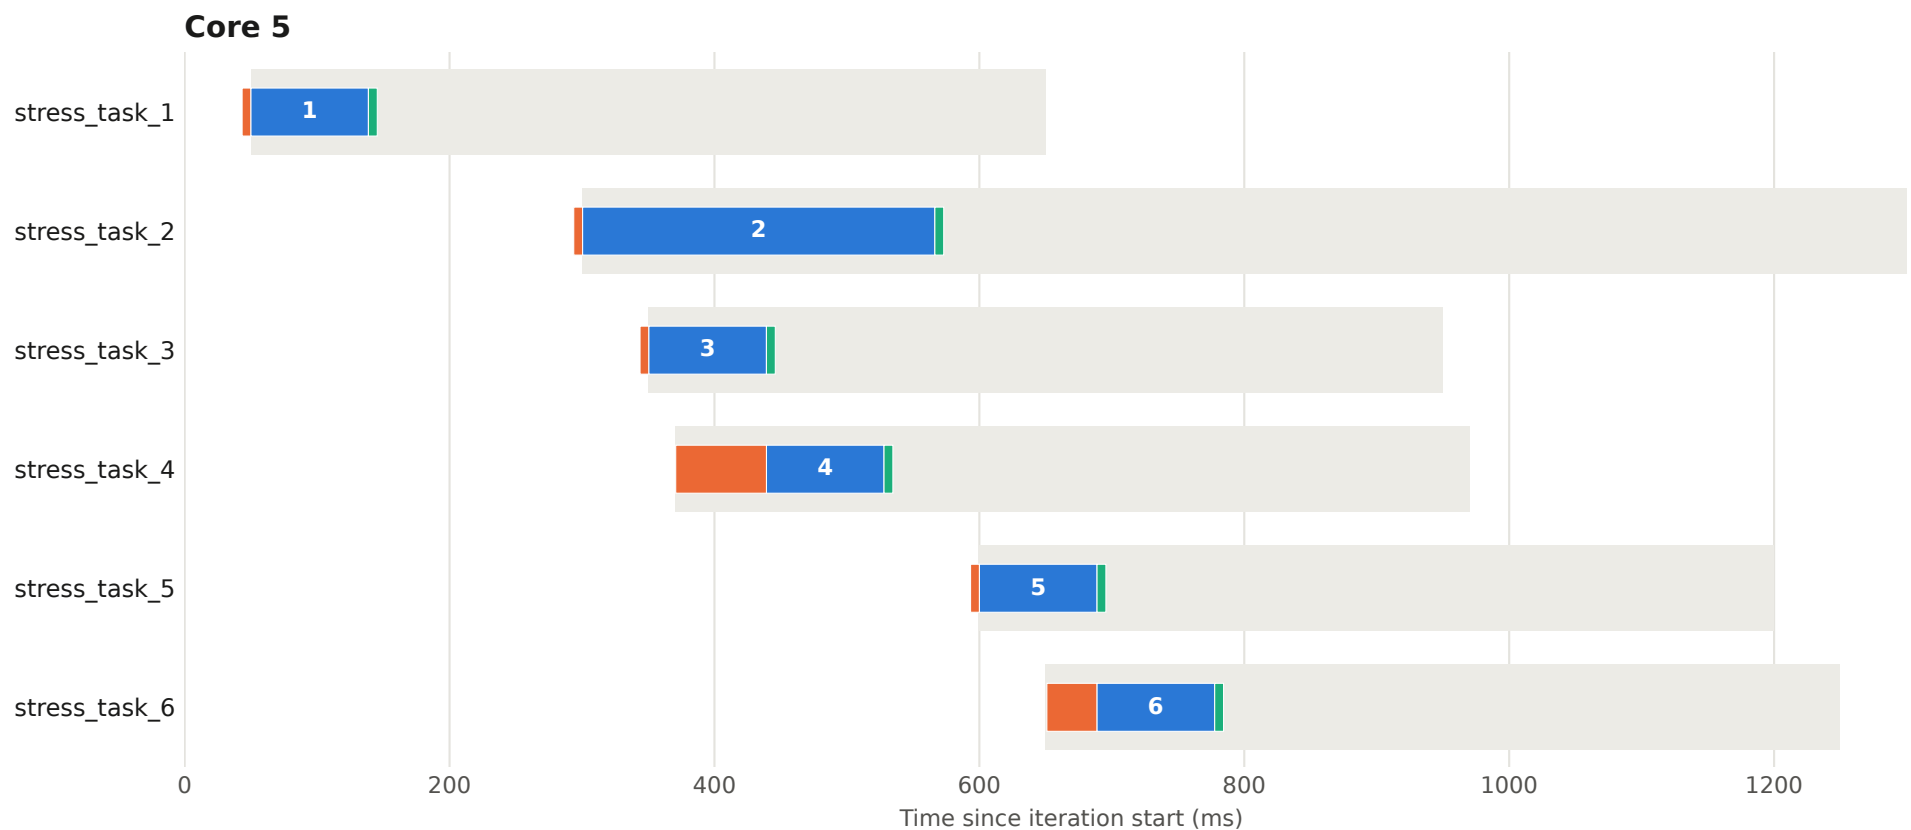


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 63 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

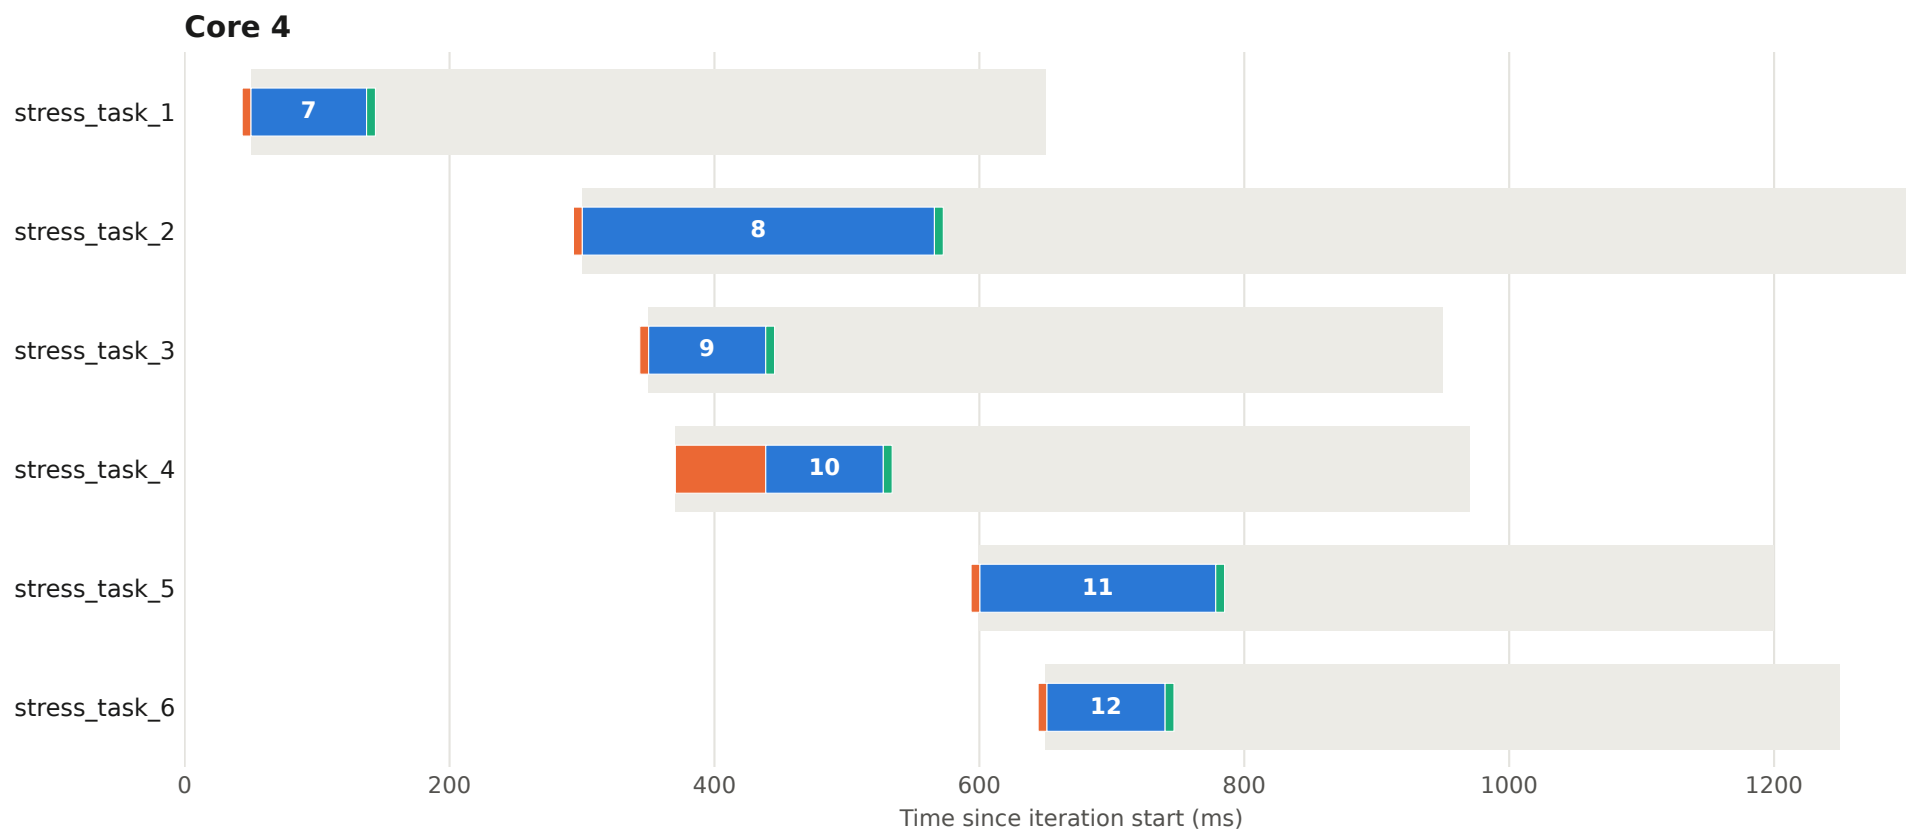


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 63 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

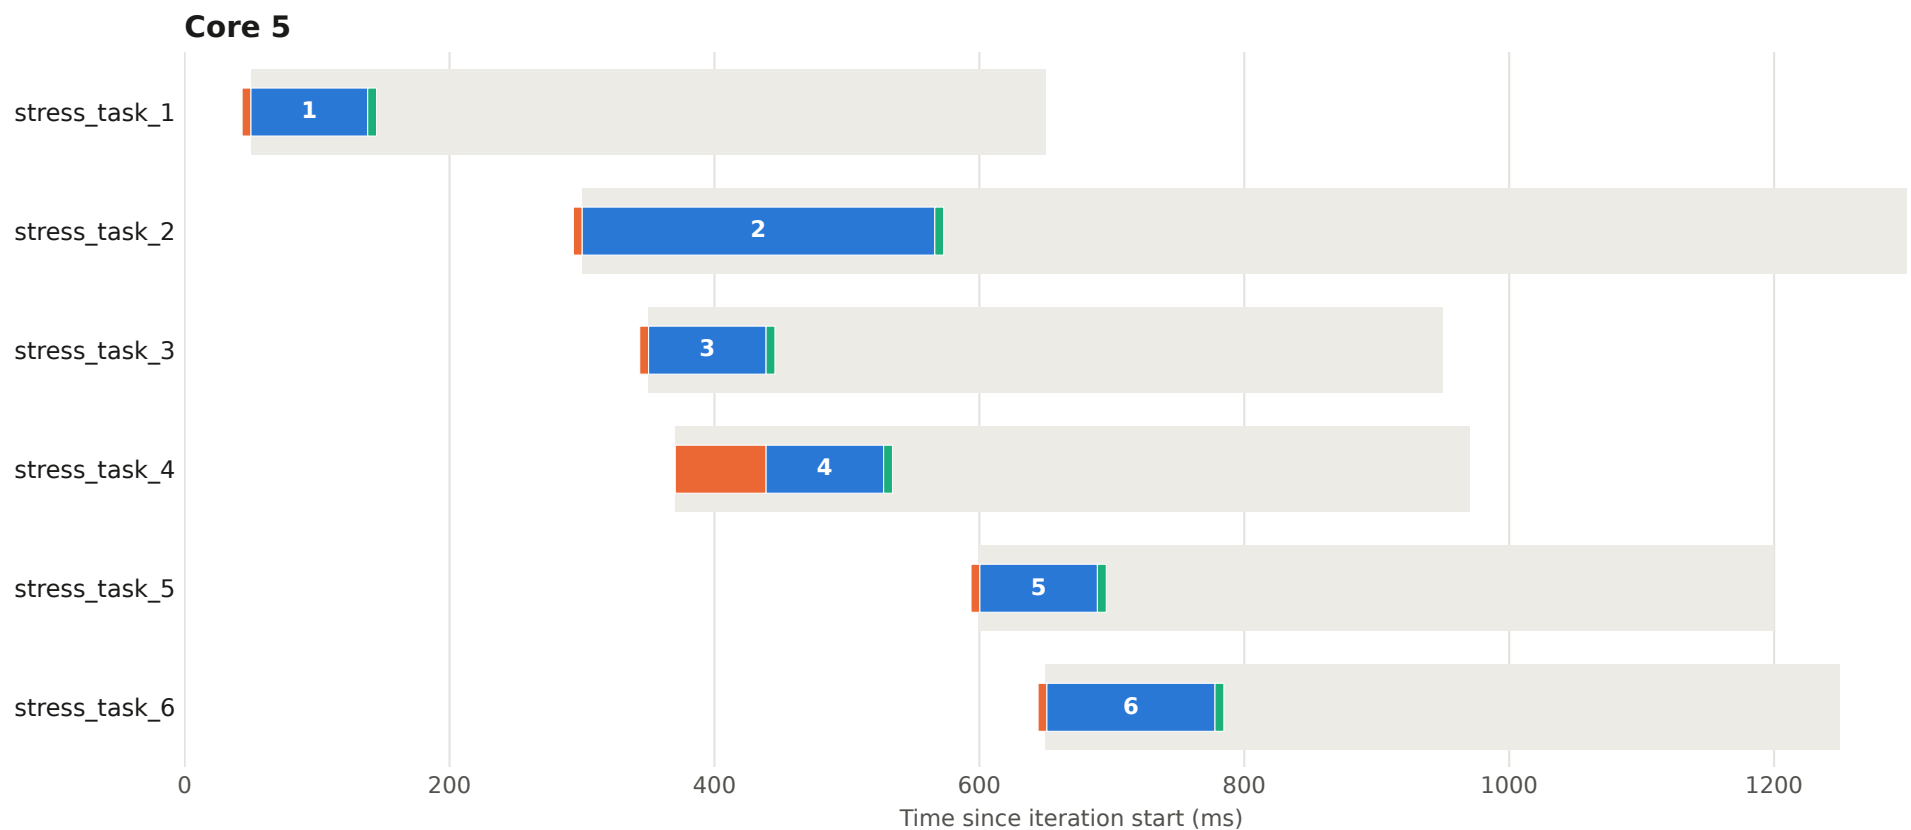


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 64 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

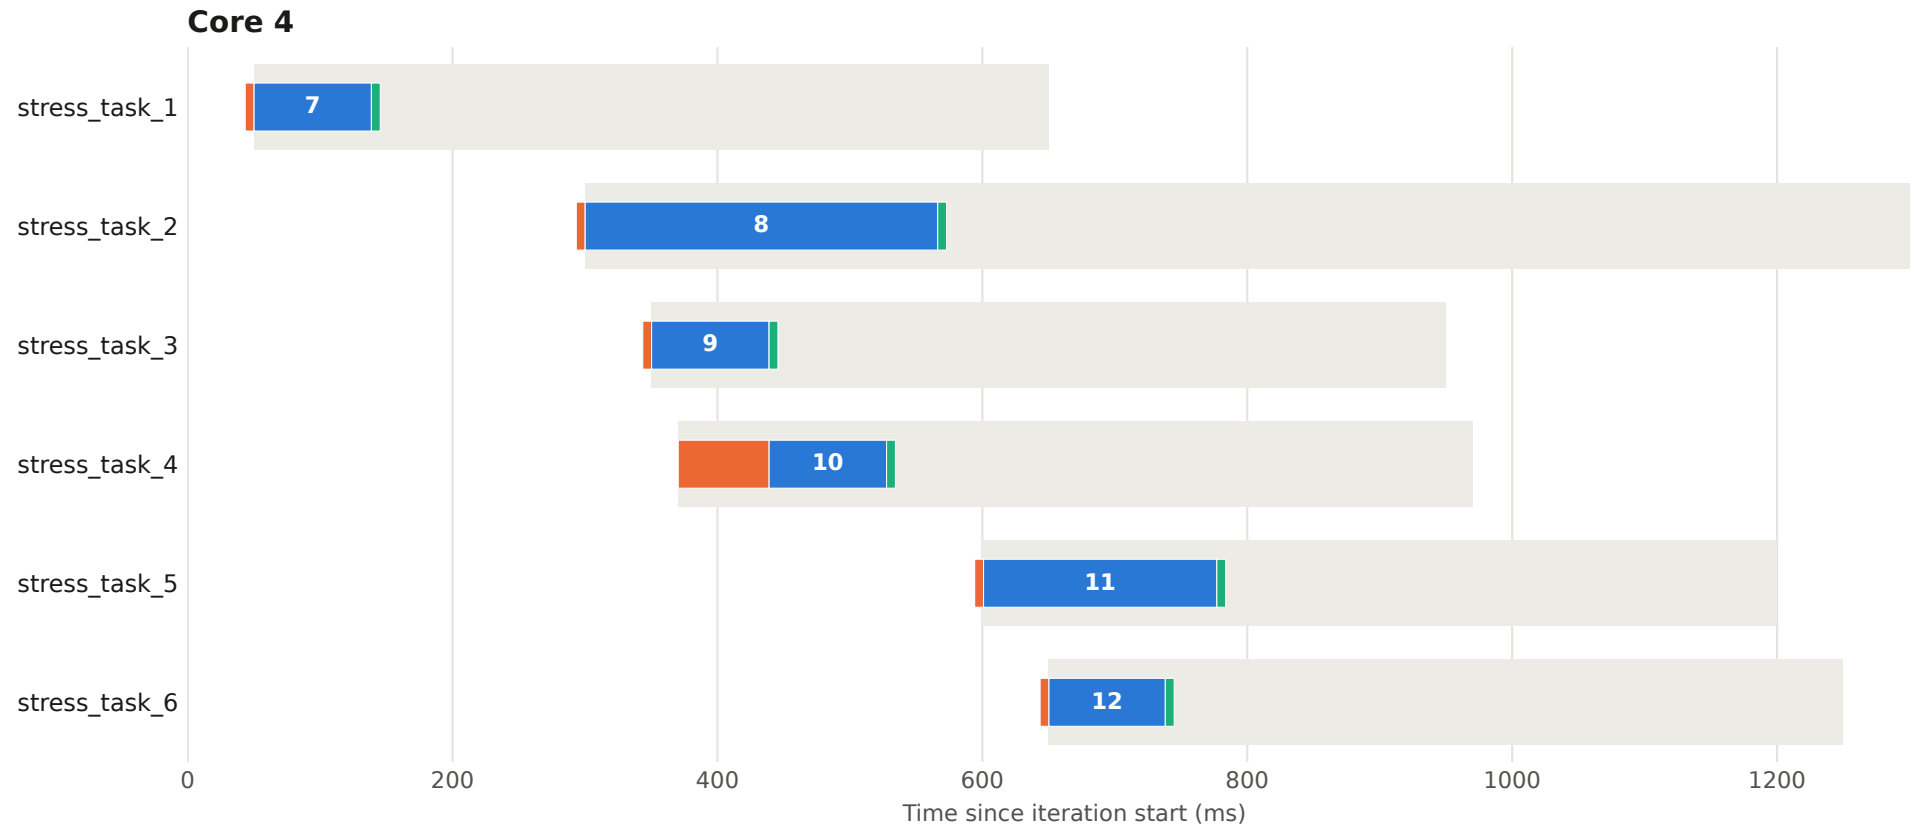


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 64 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

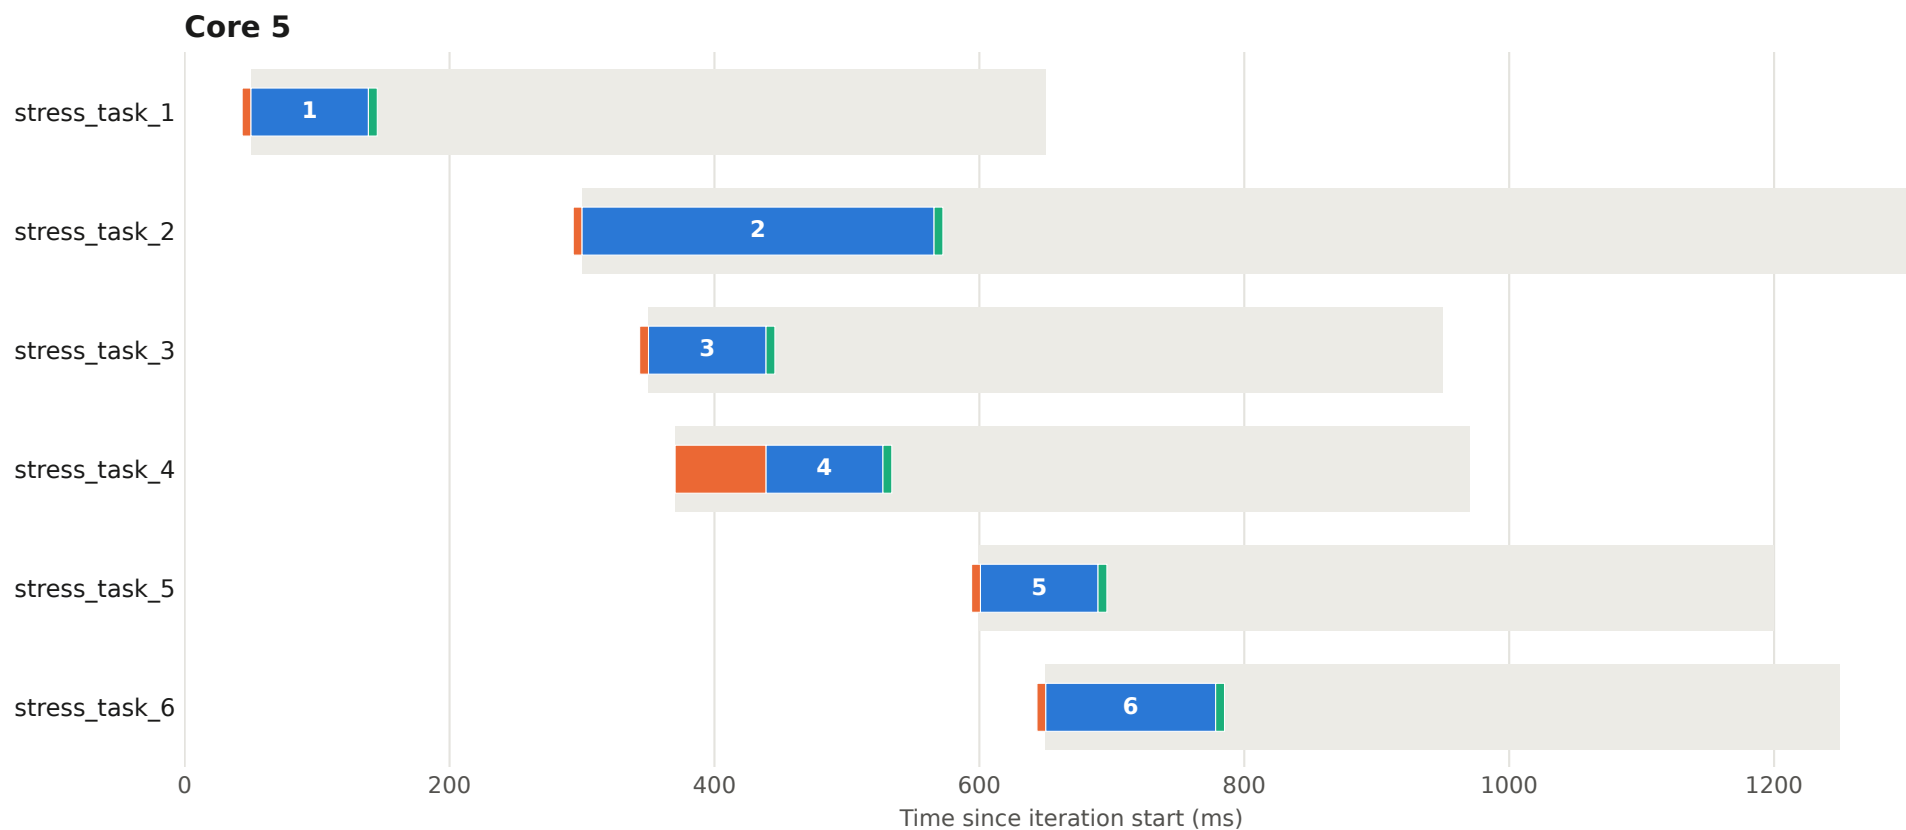


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 65 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

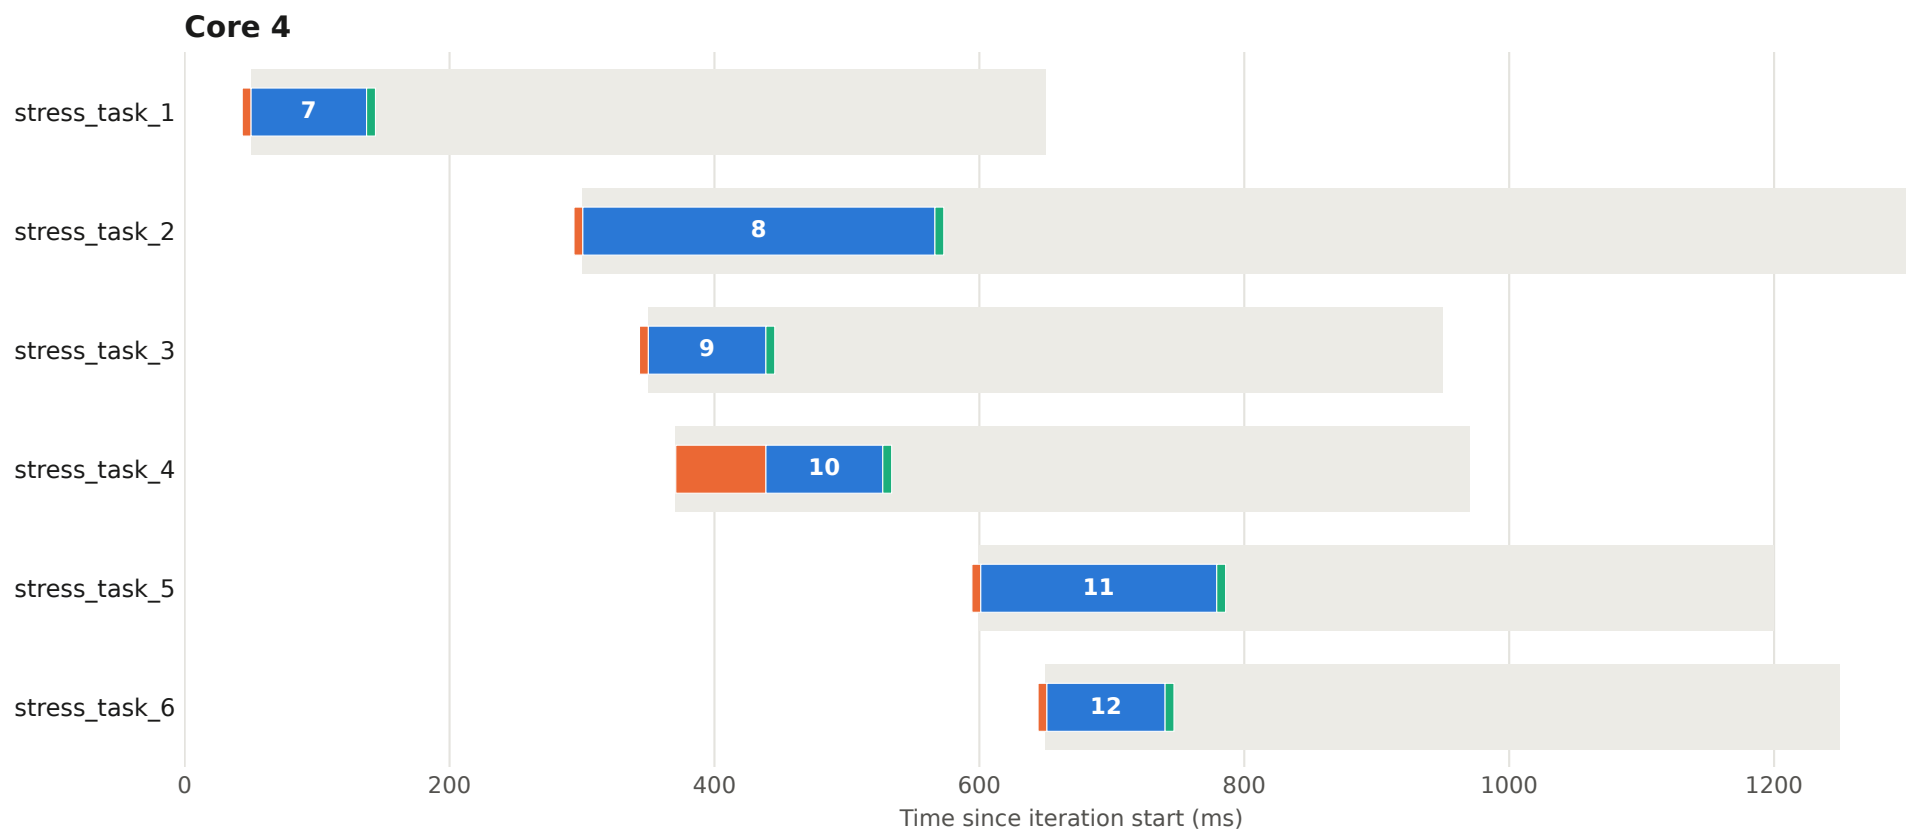


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 65 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

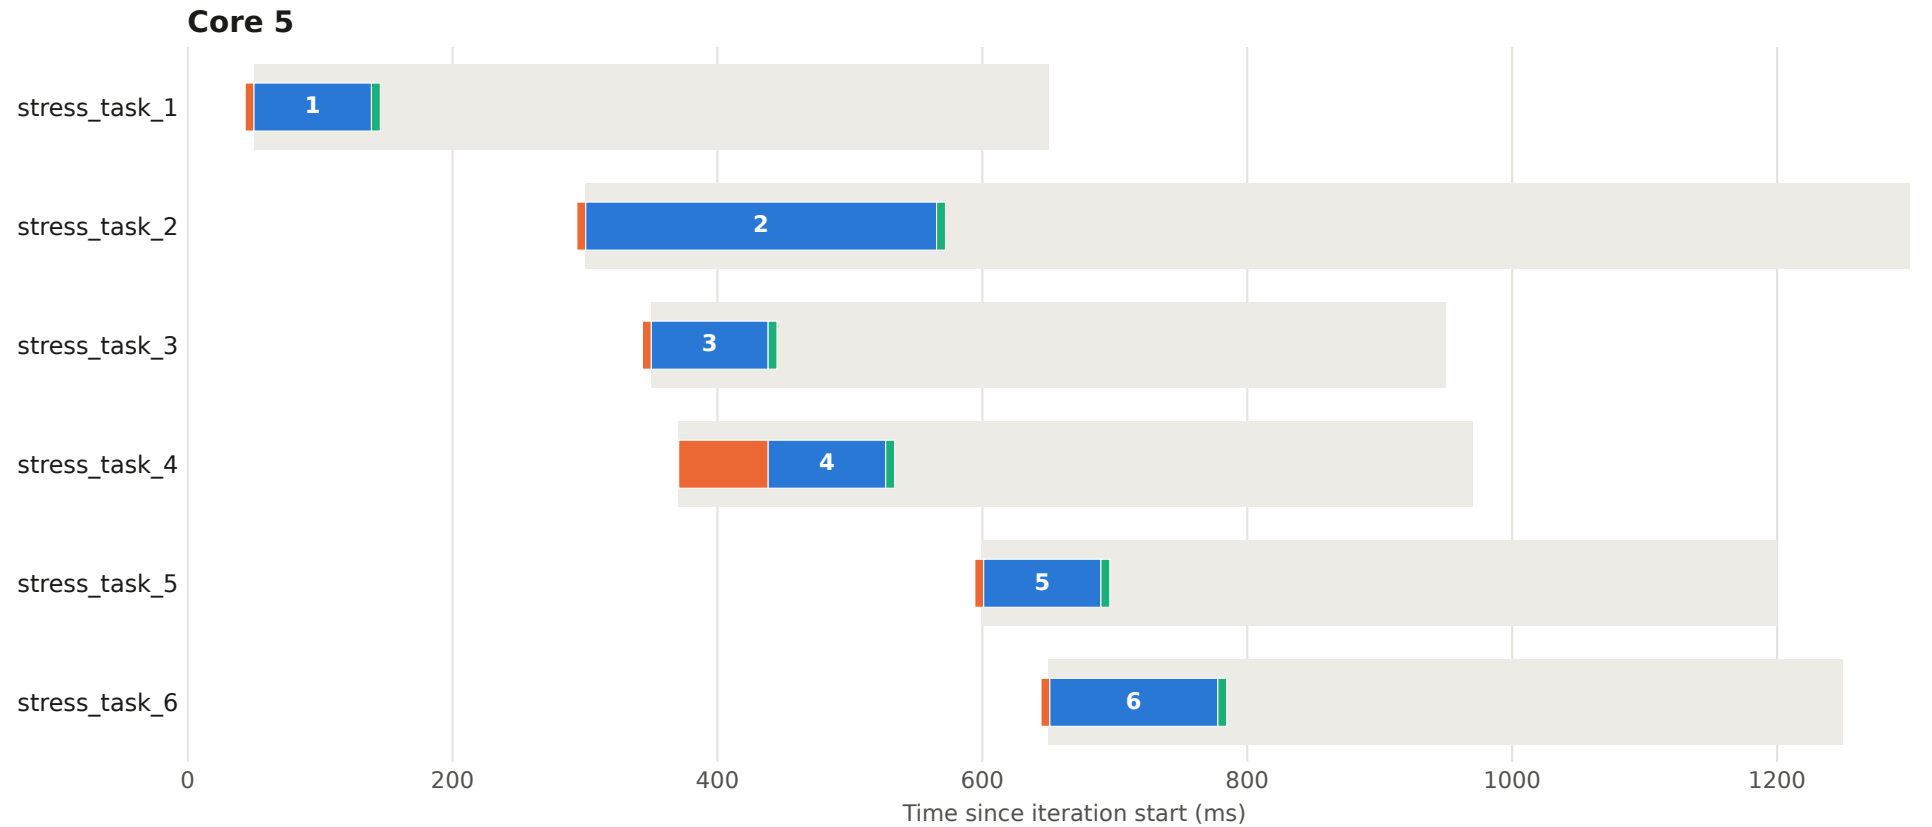


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 66 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

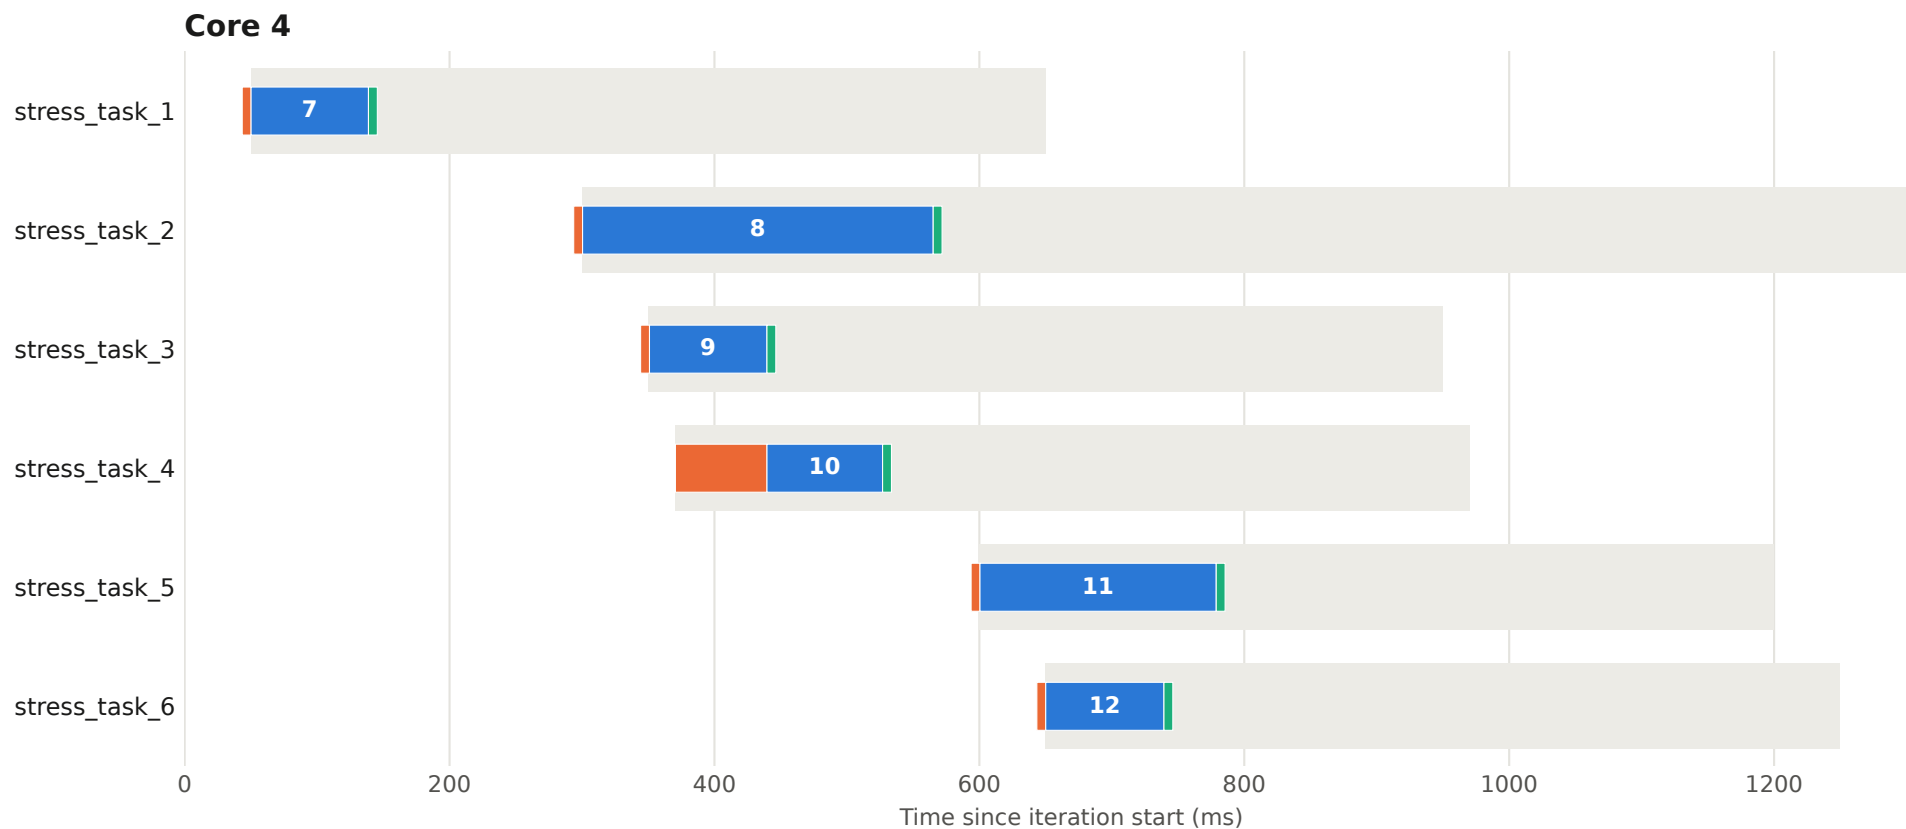


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 66 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

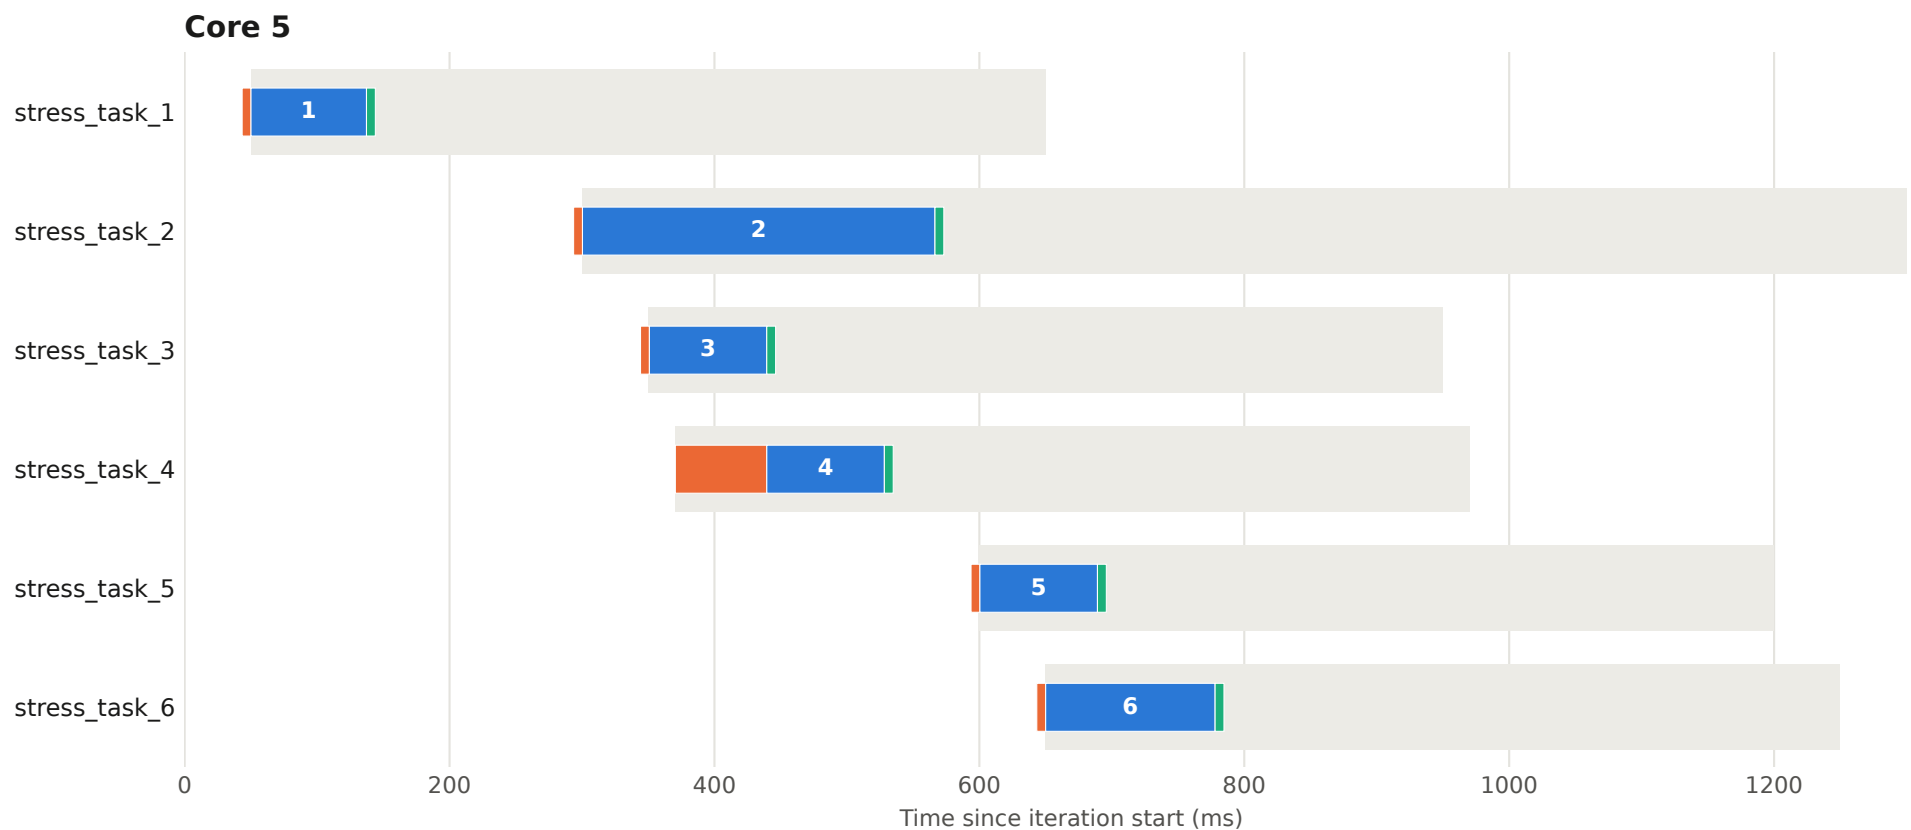


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 67 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

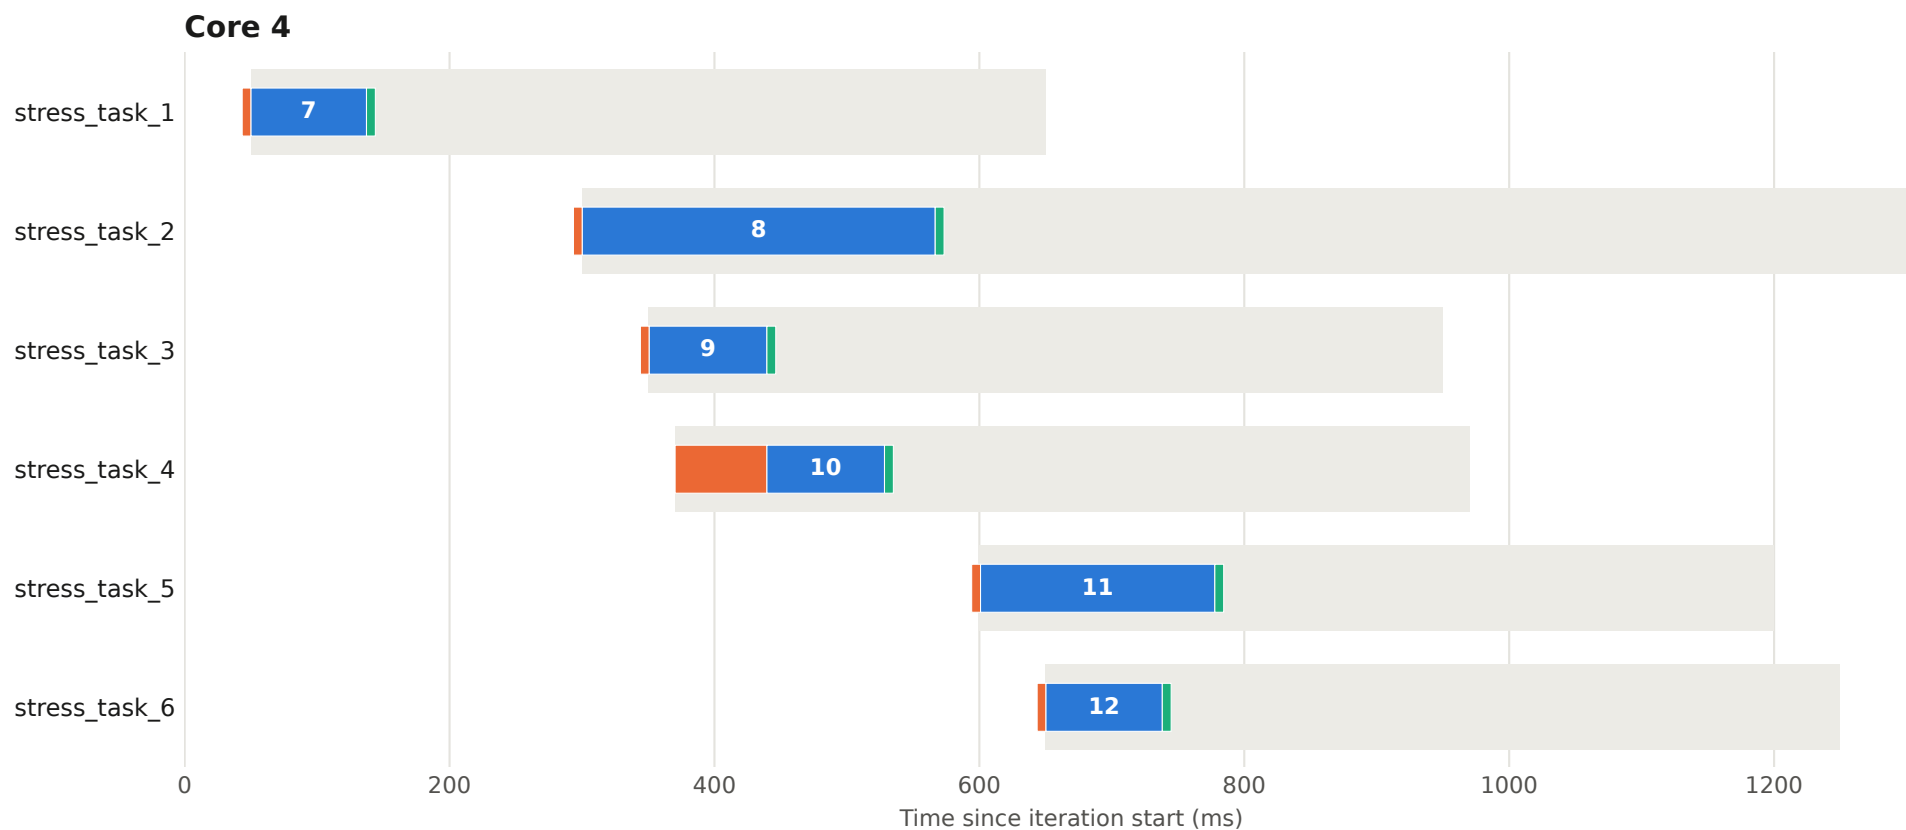


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 67 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

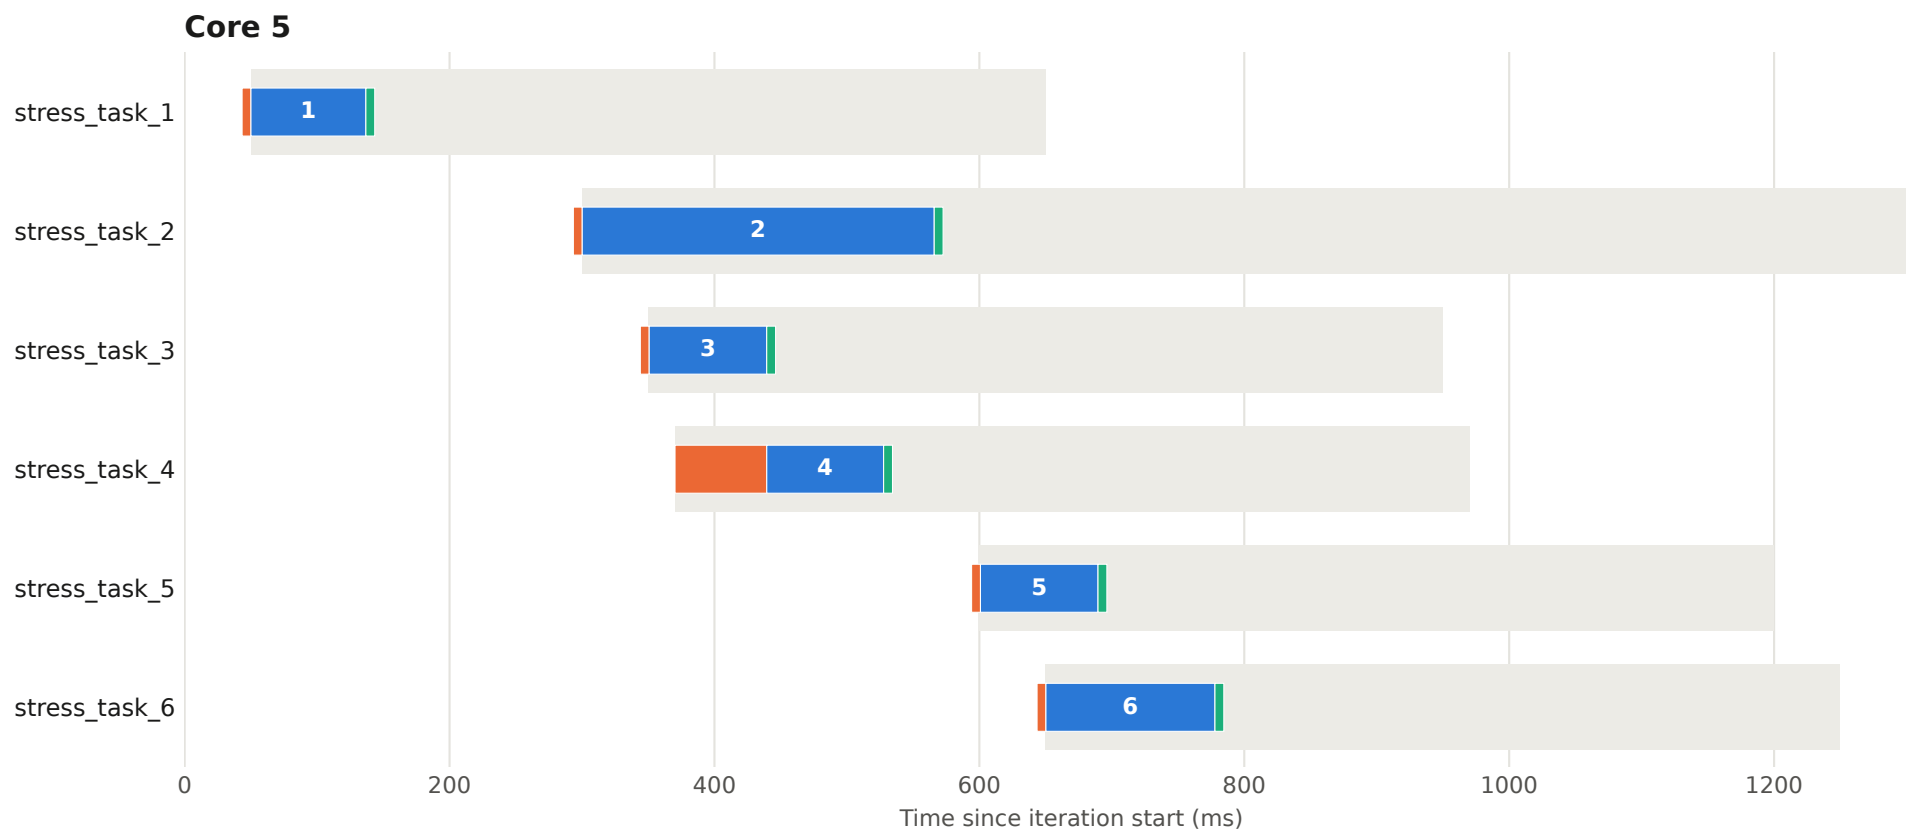


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 68 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

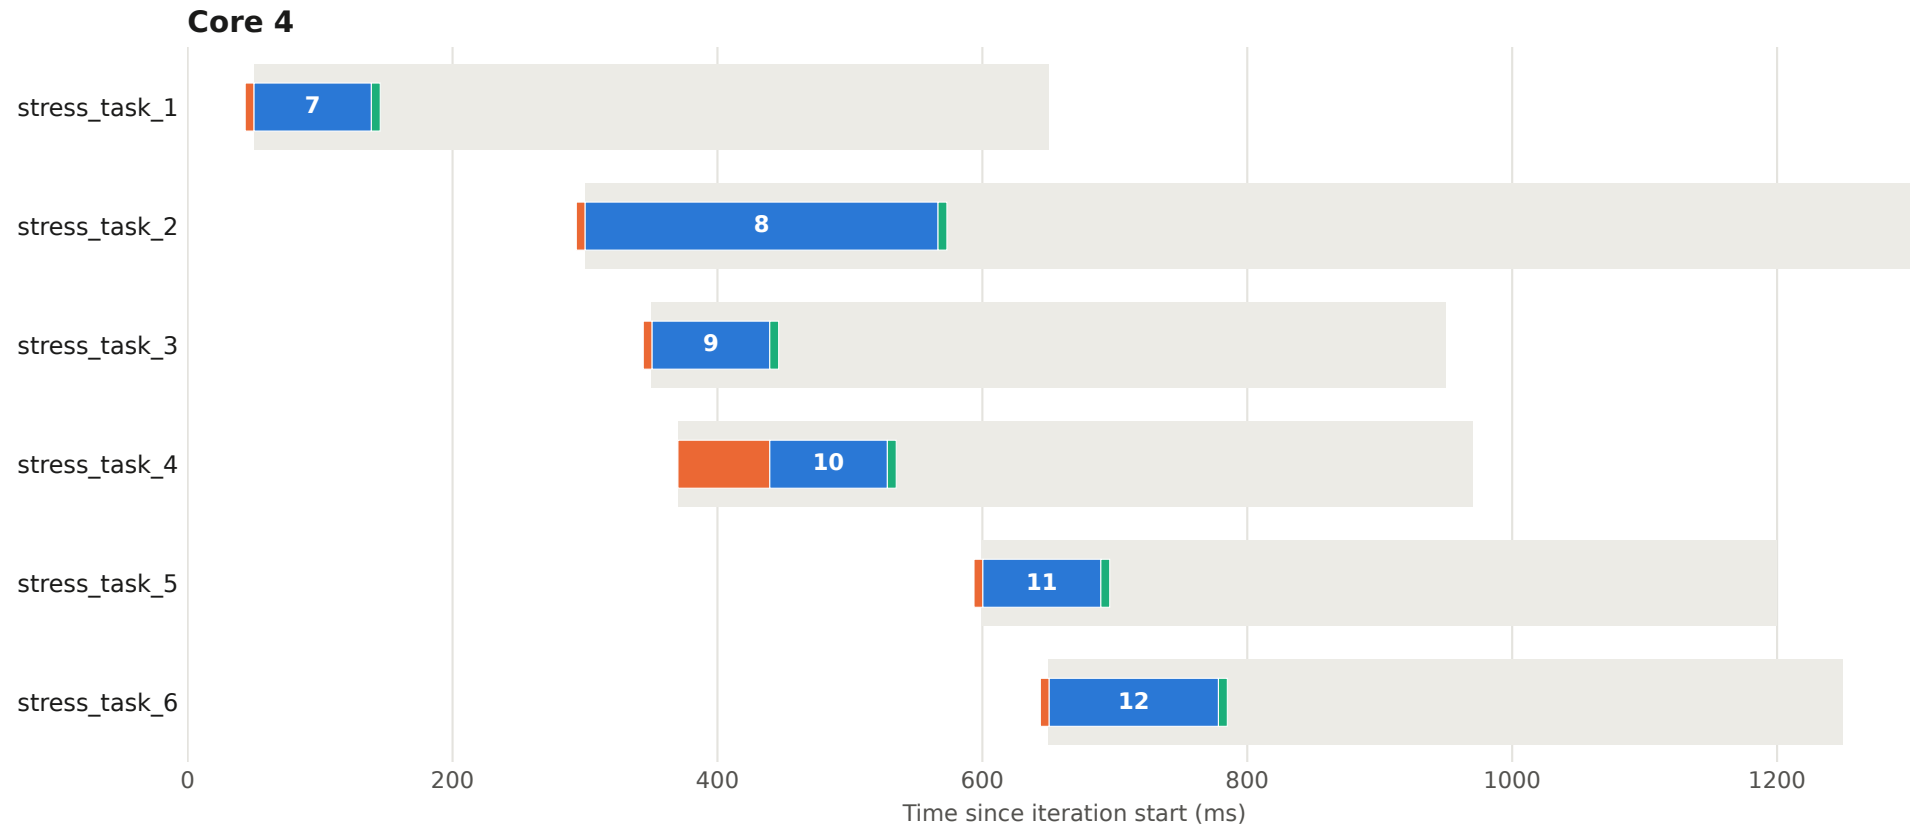


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 68 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

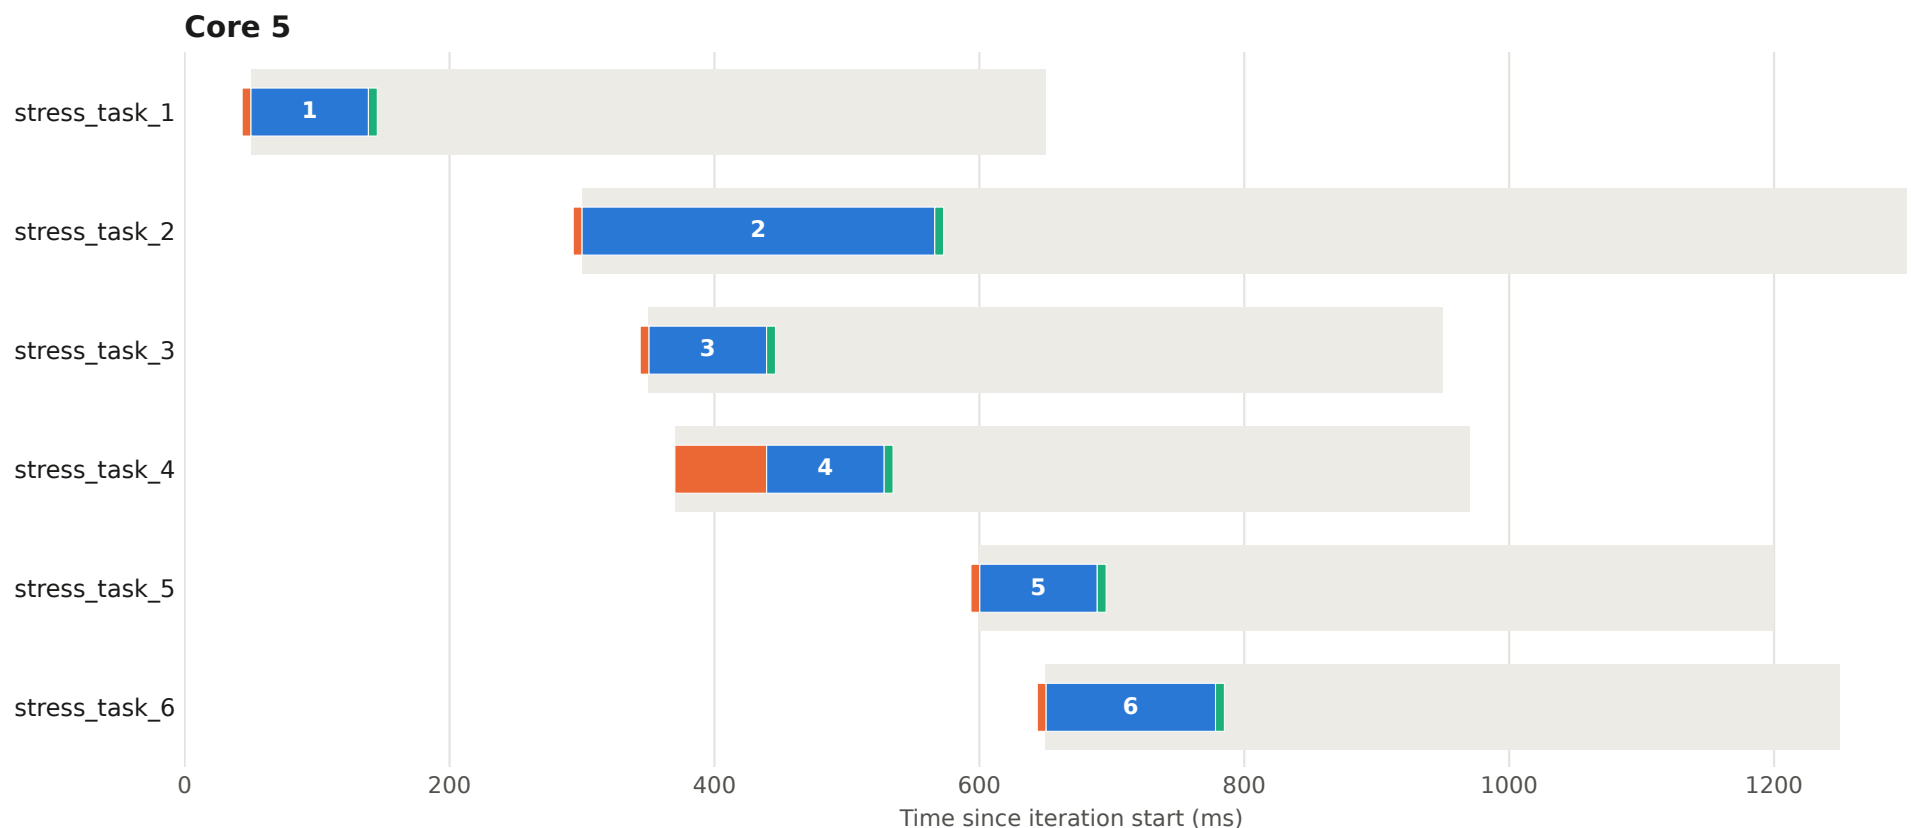


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 69 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

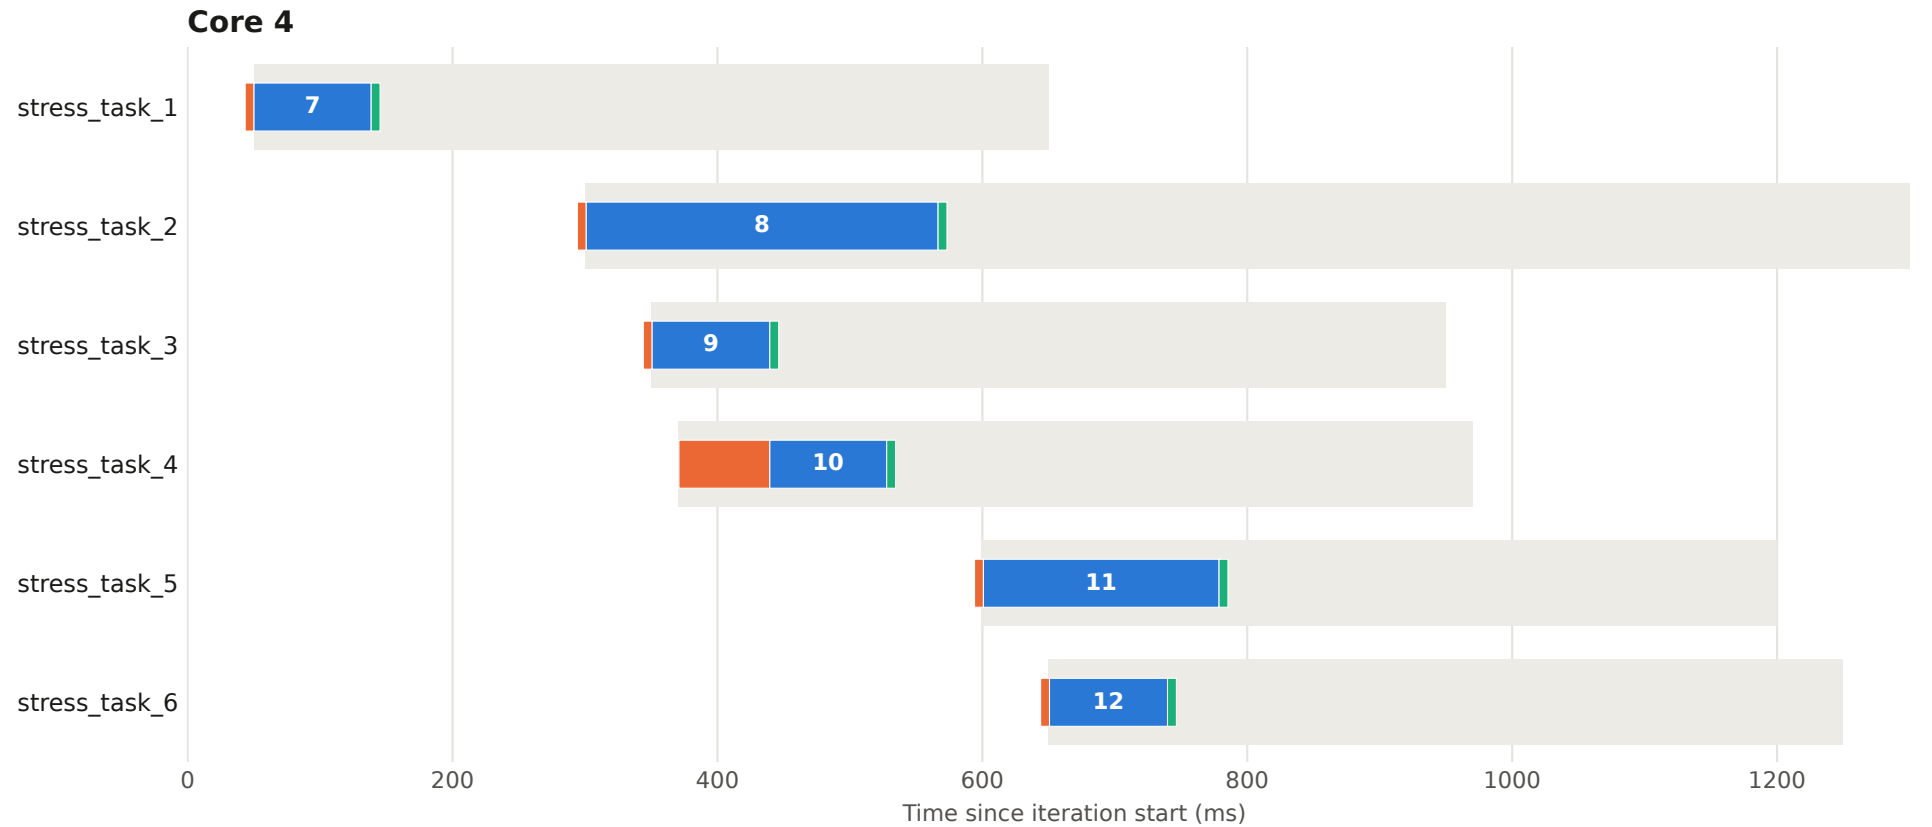


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 69 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

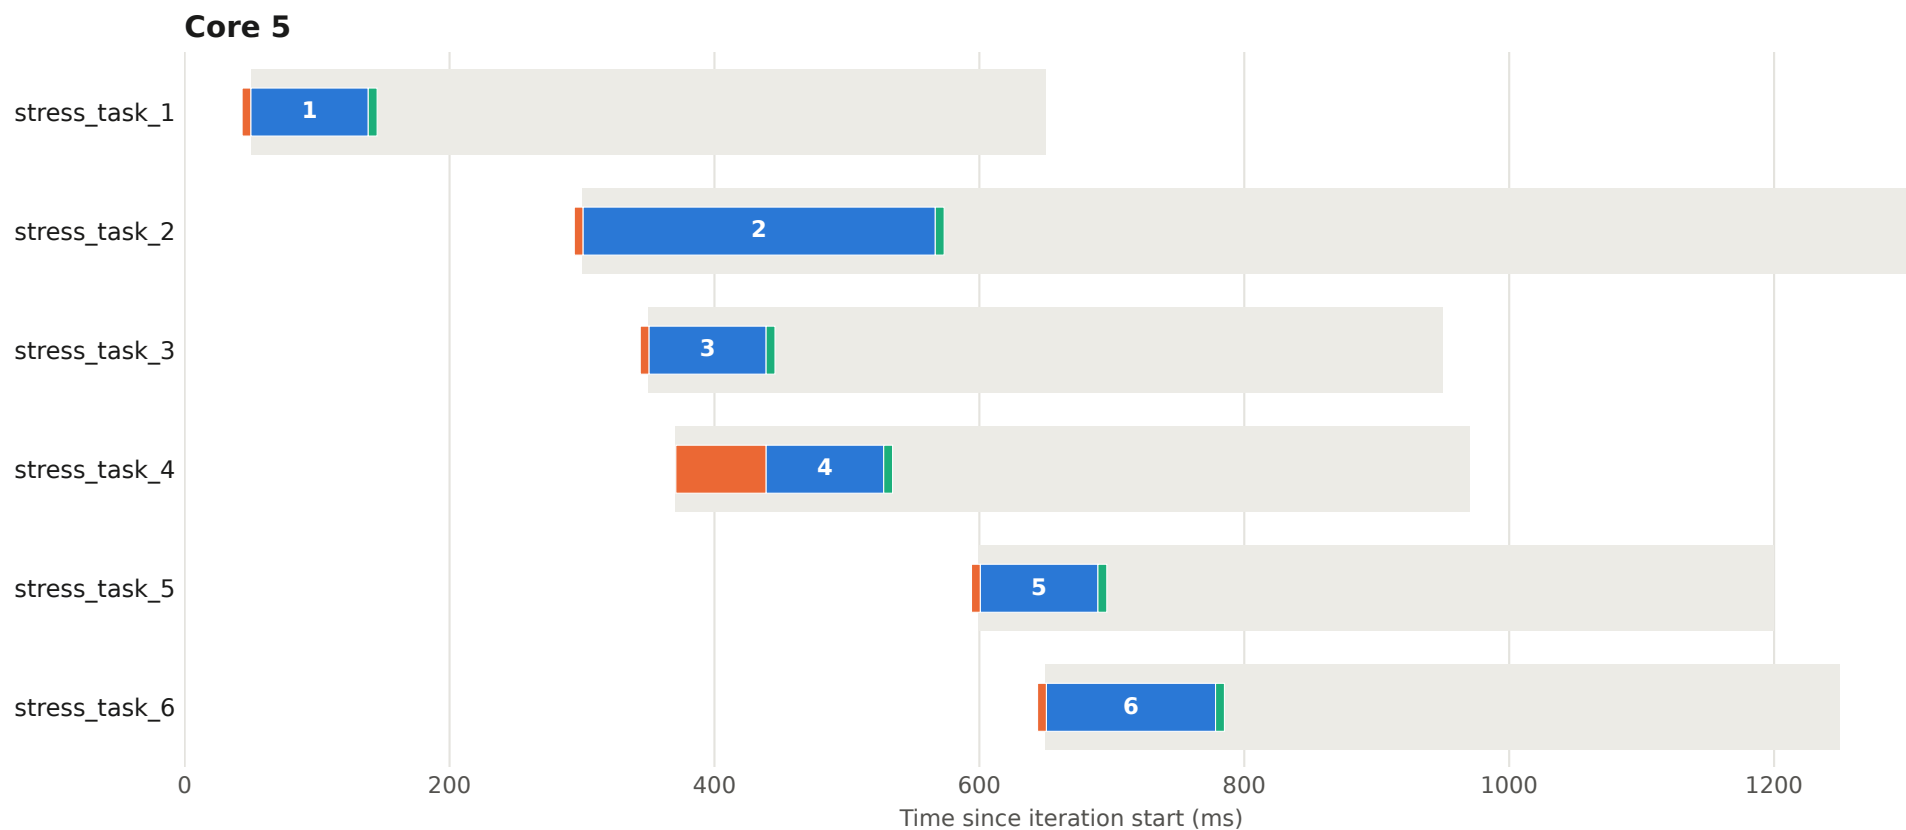


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 70 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

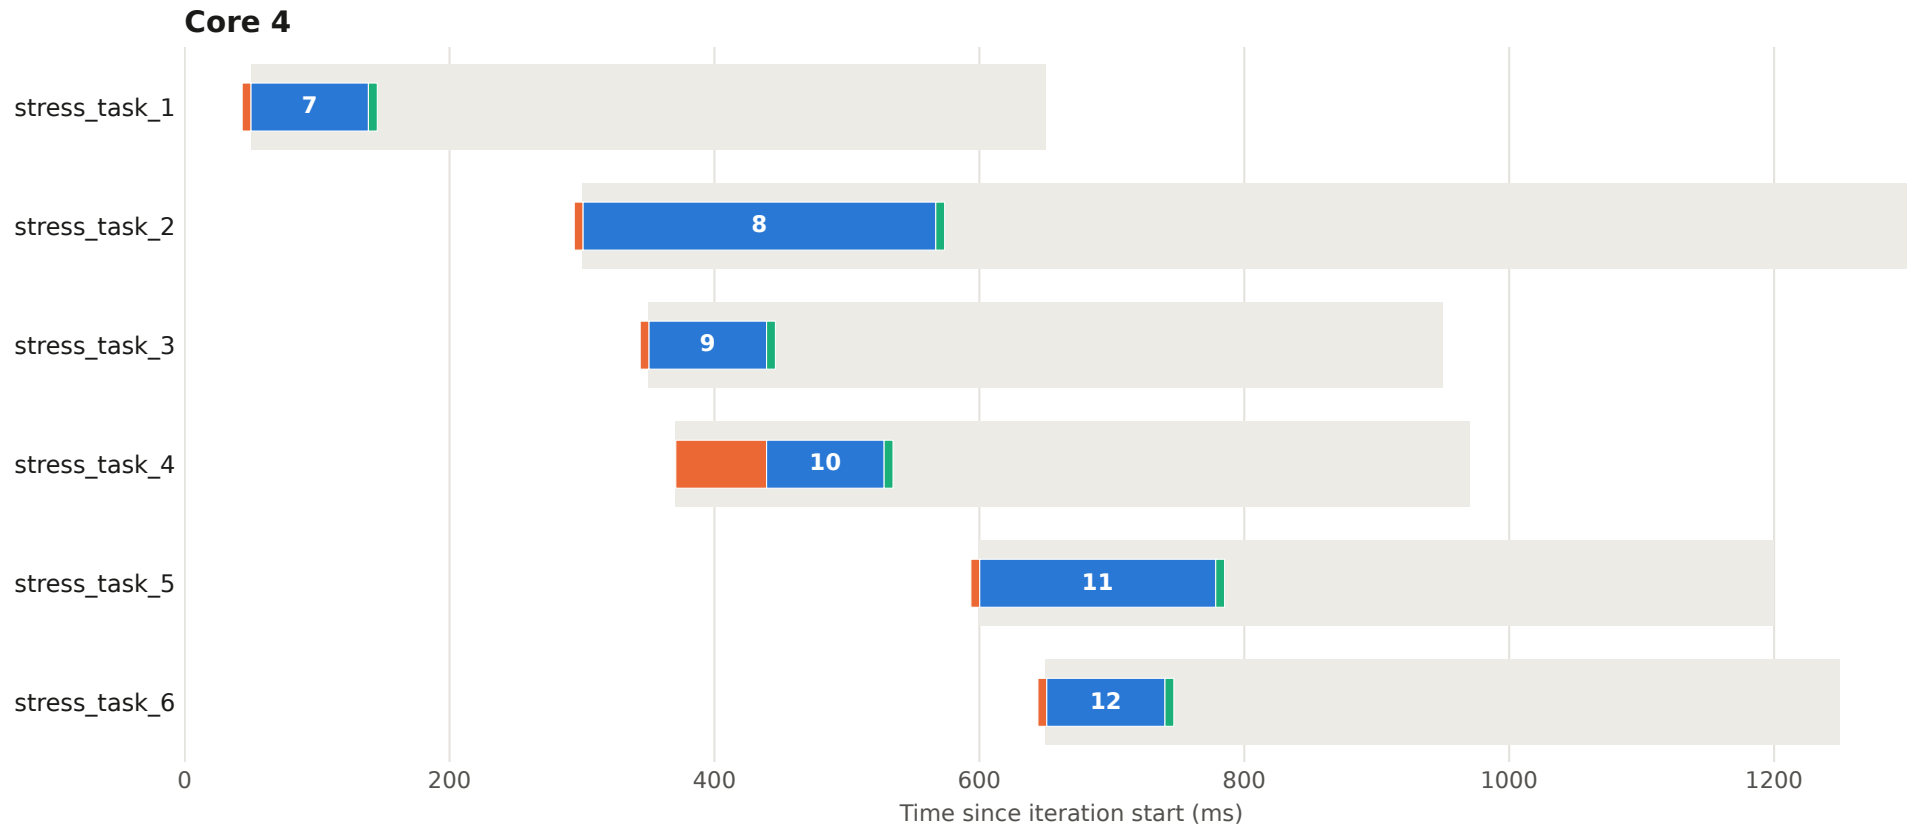


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 70 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

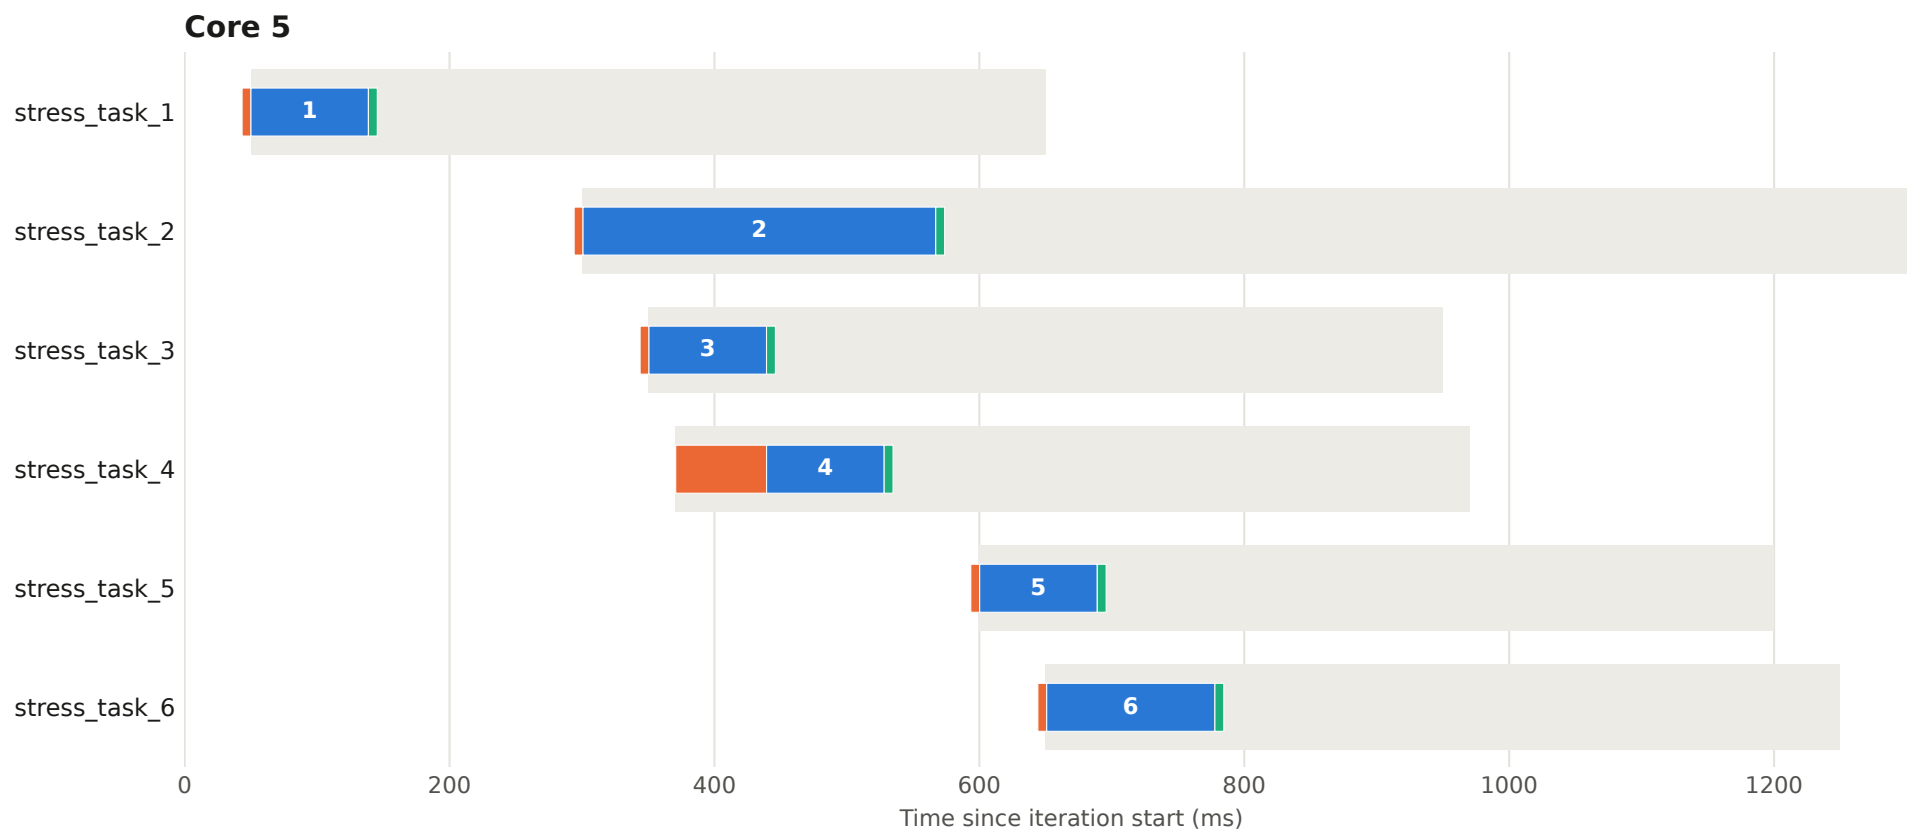


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 71 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

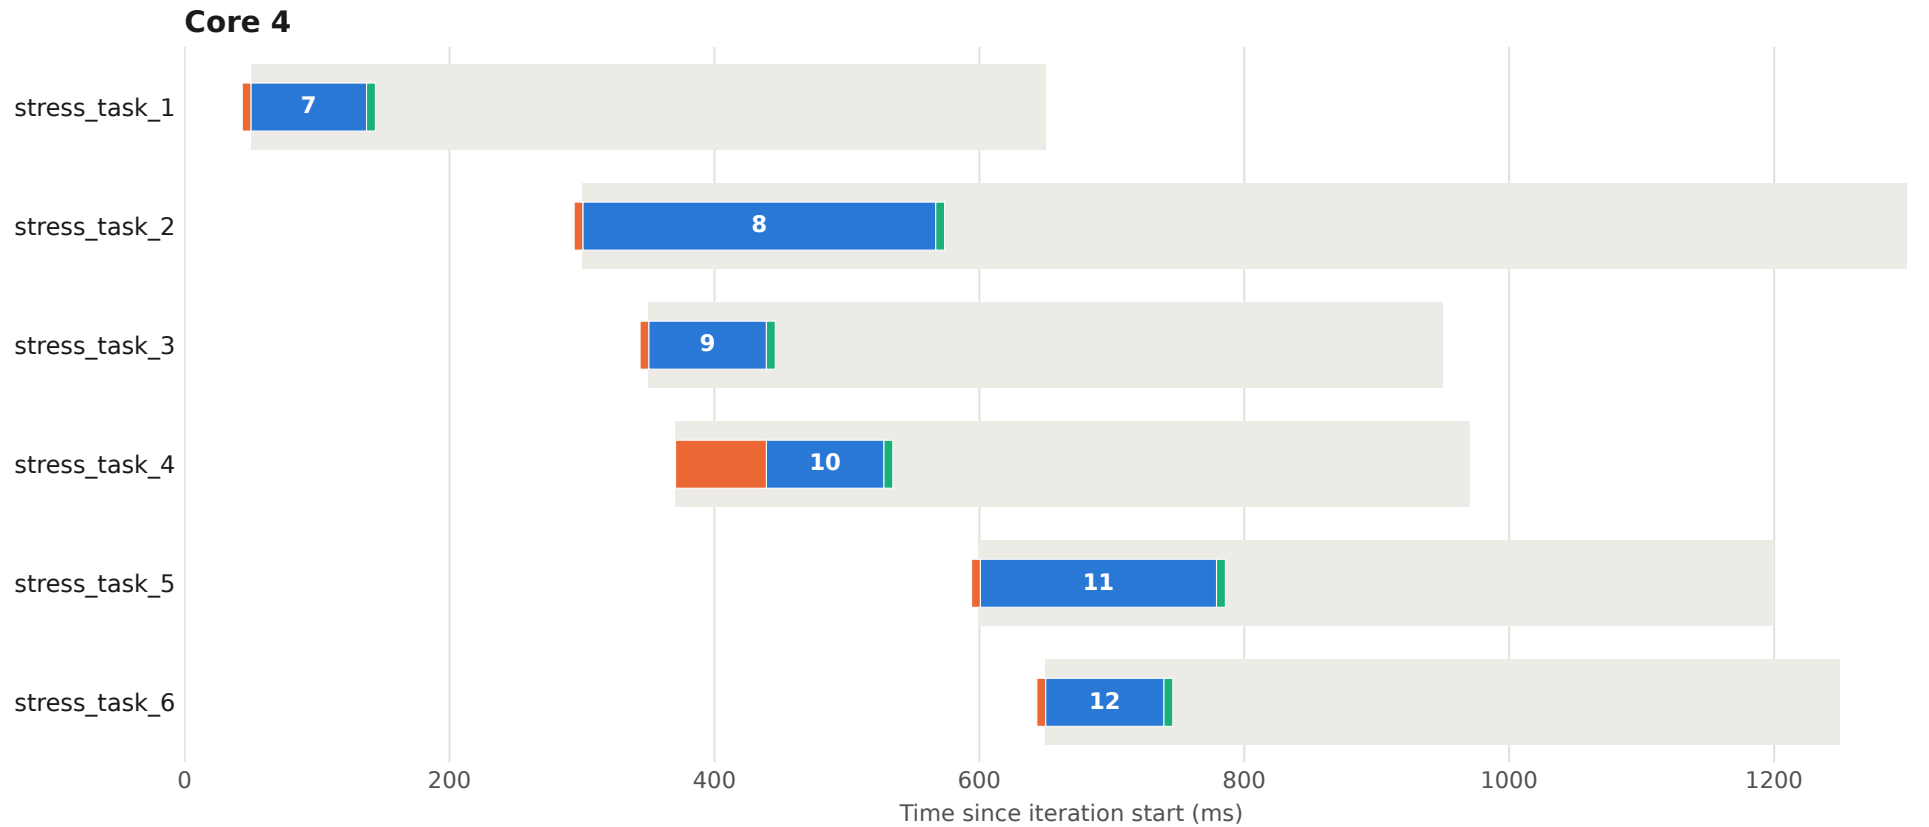


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 71 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

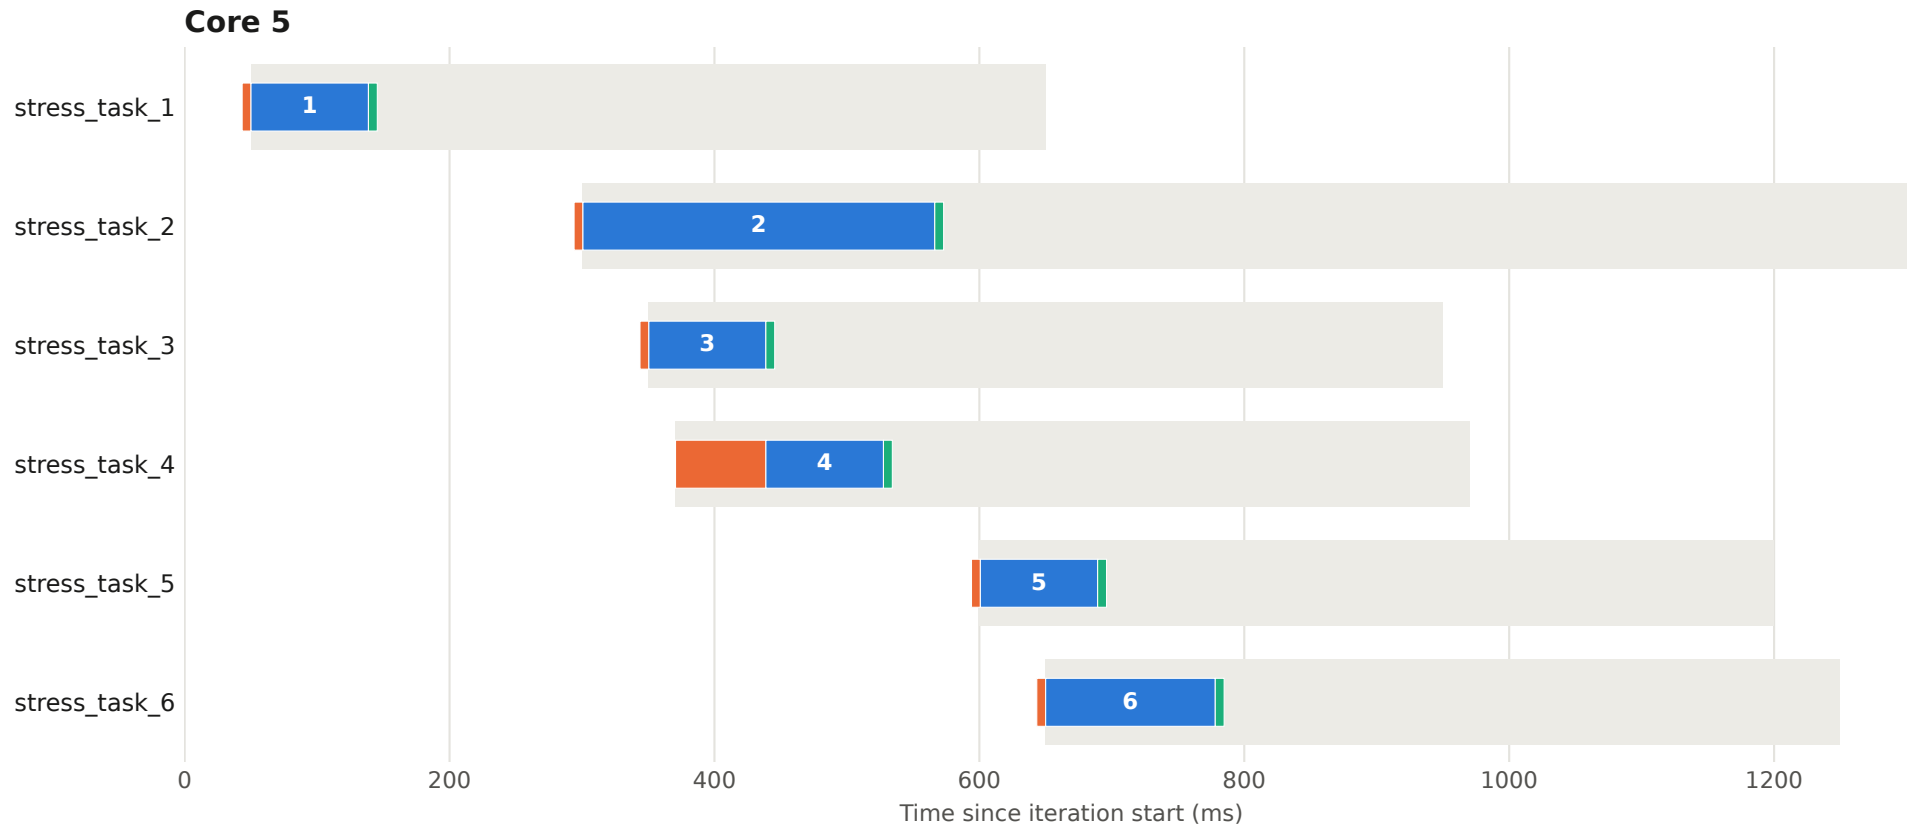


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 72 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

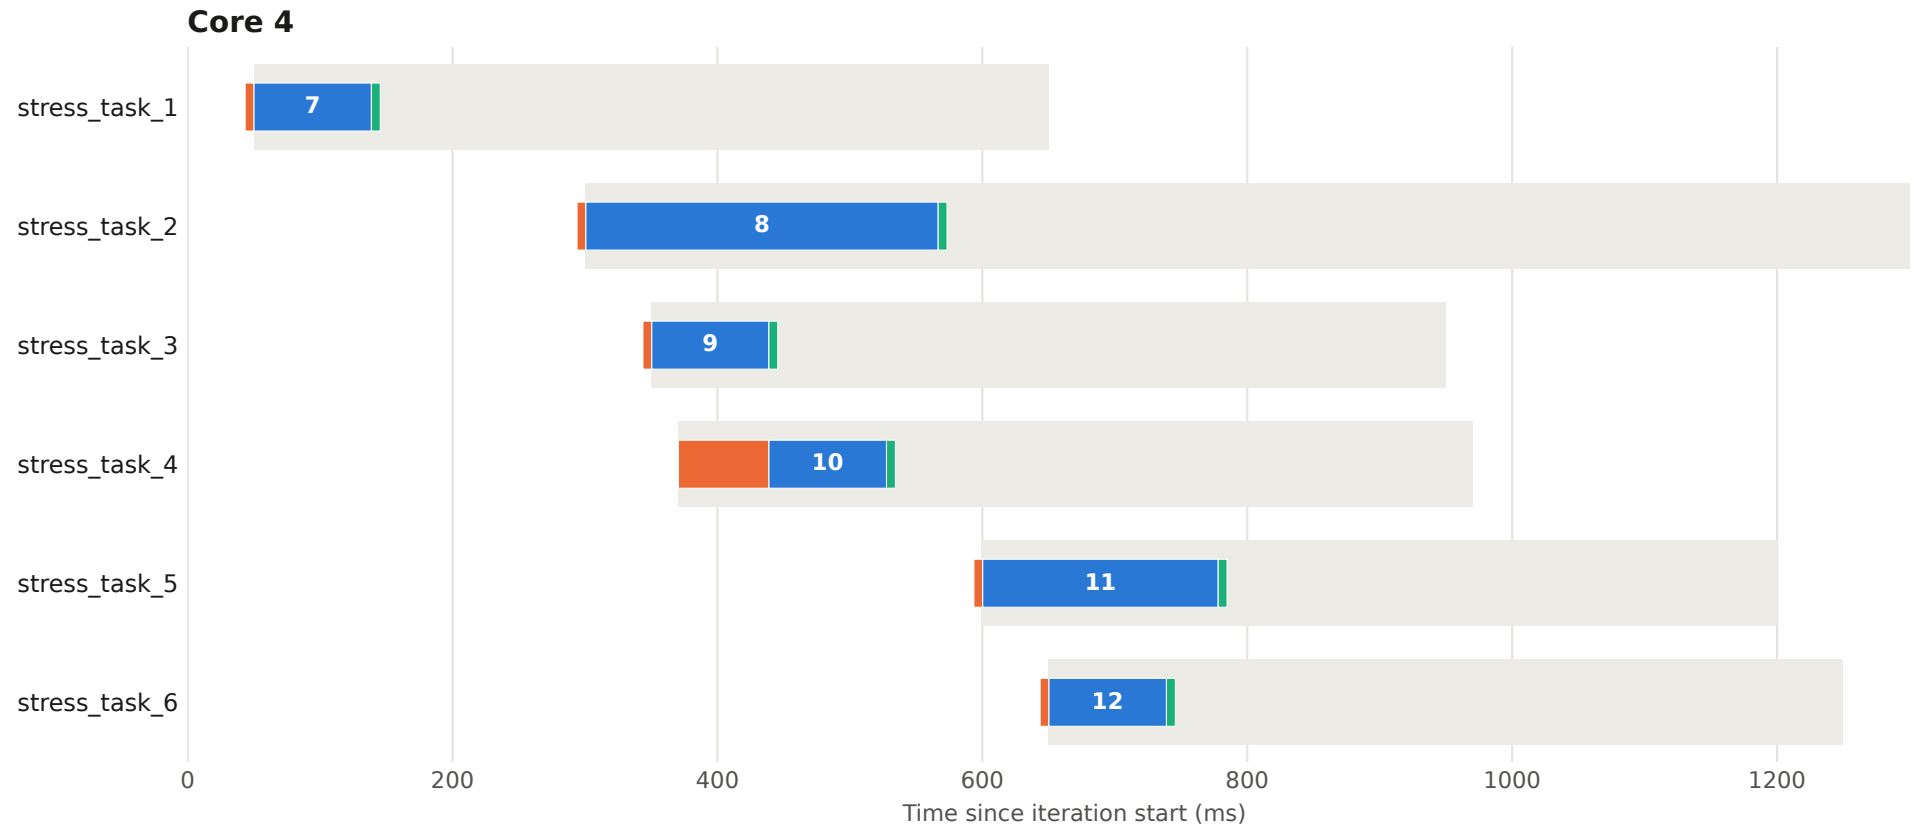


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 72 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

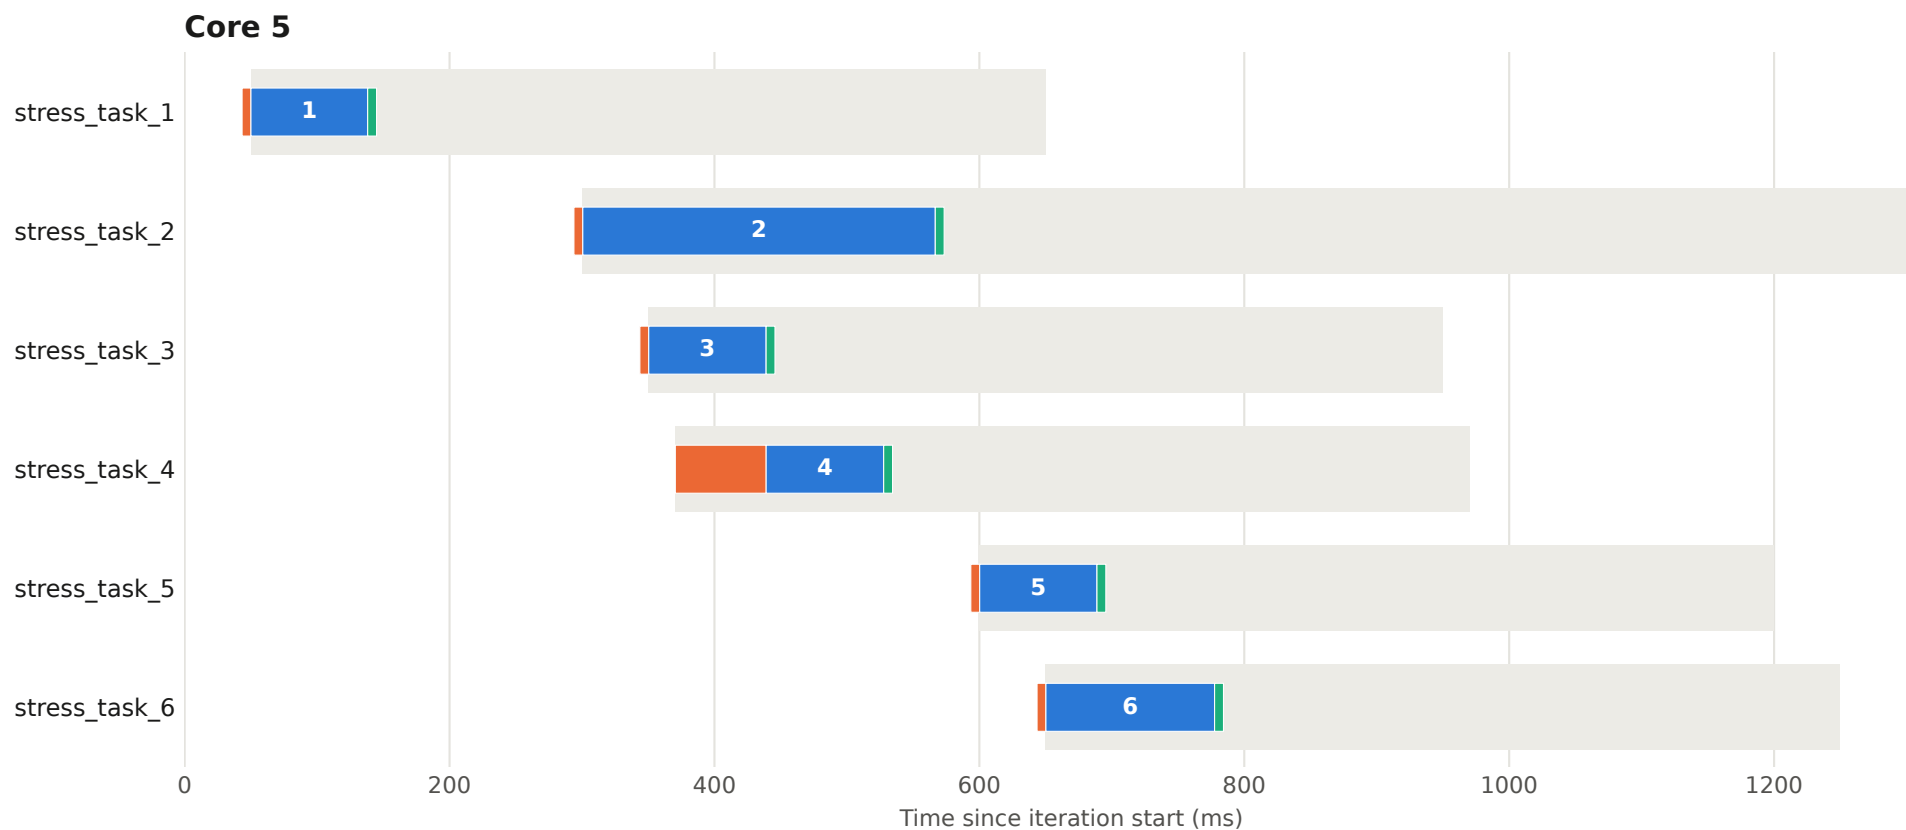


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 73 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

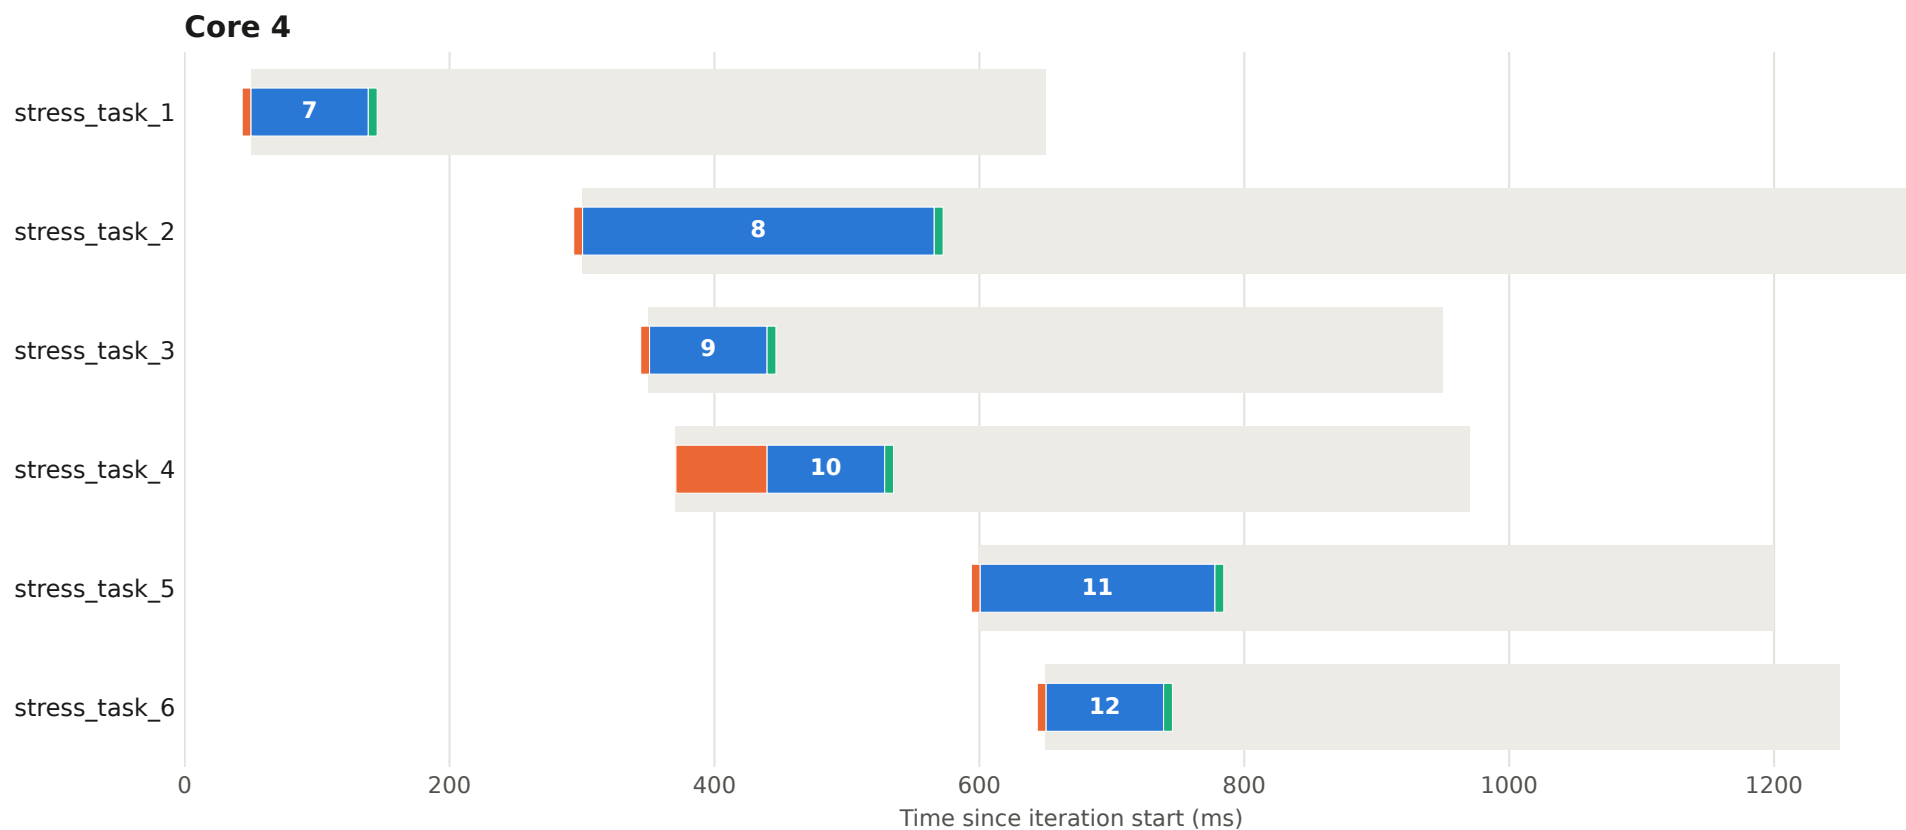


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 73 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

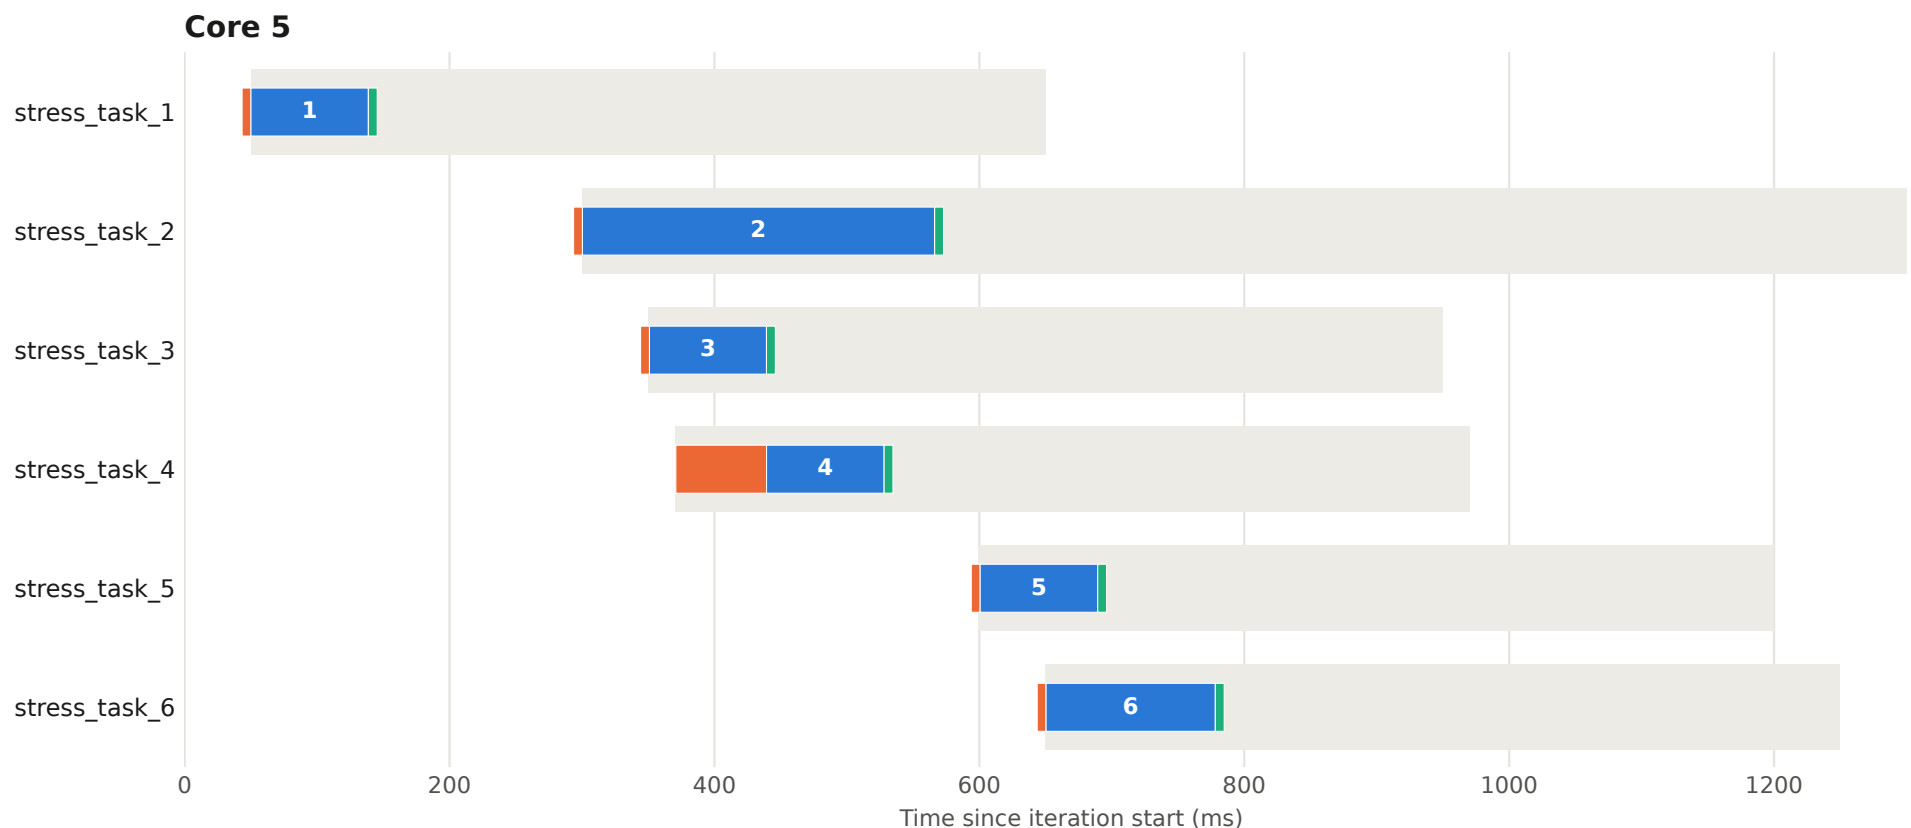


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 74 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

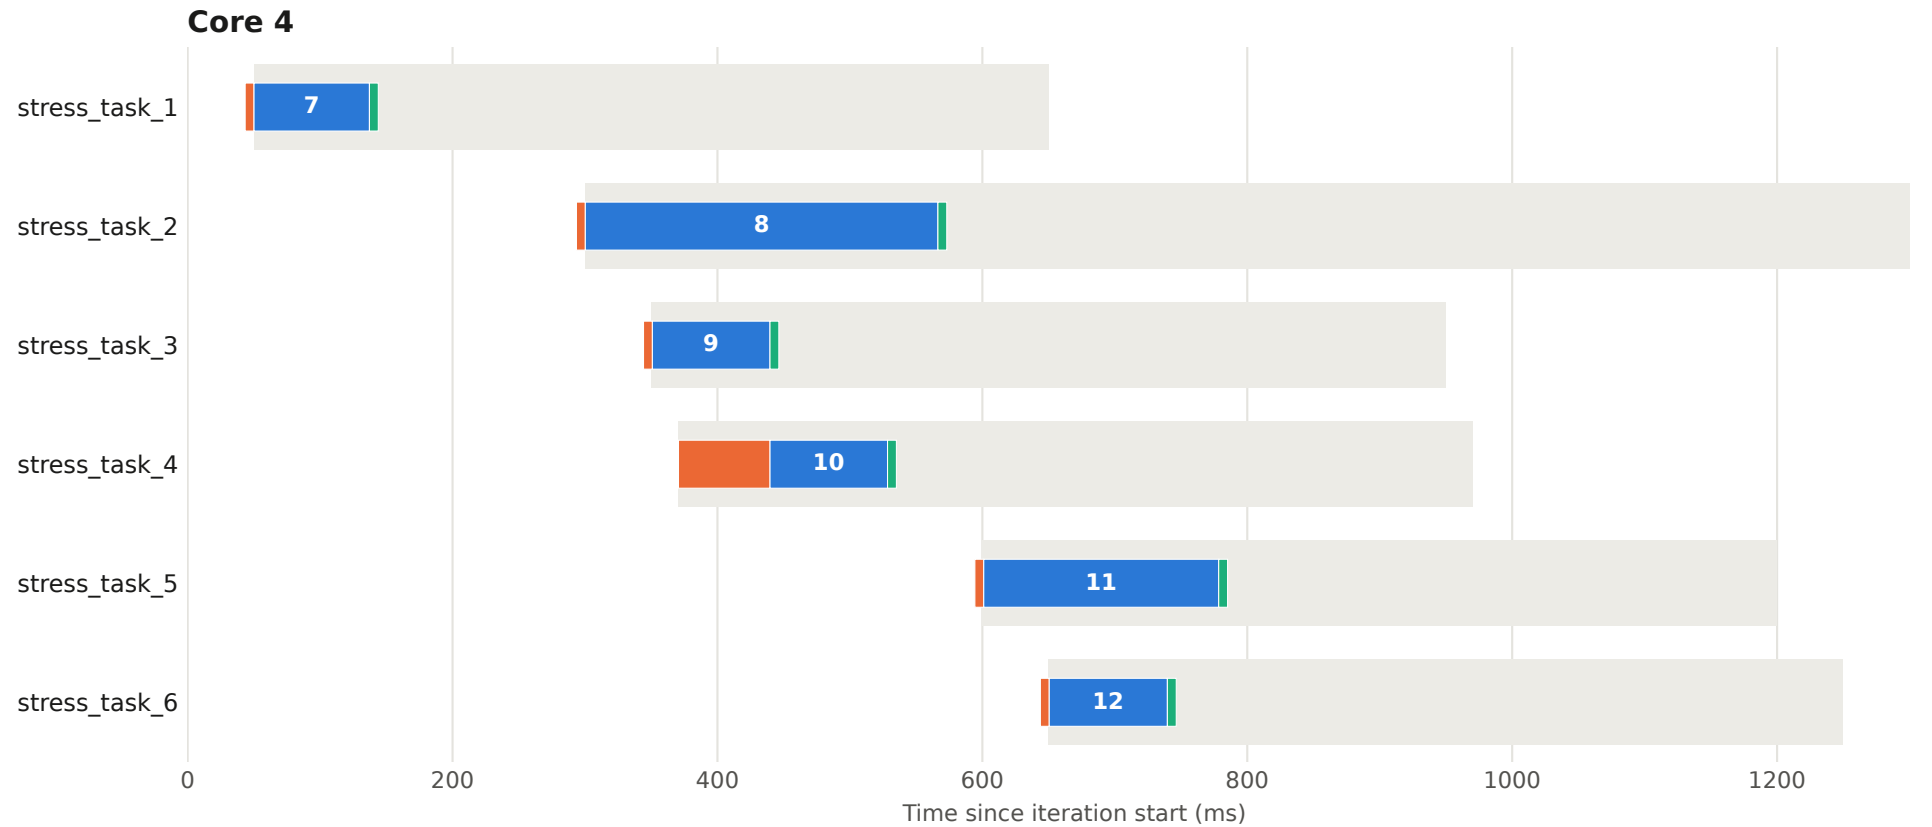


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 74 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

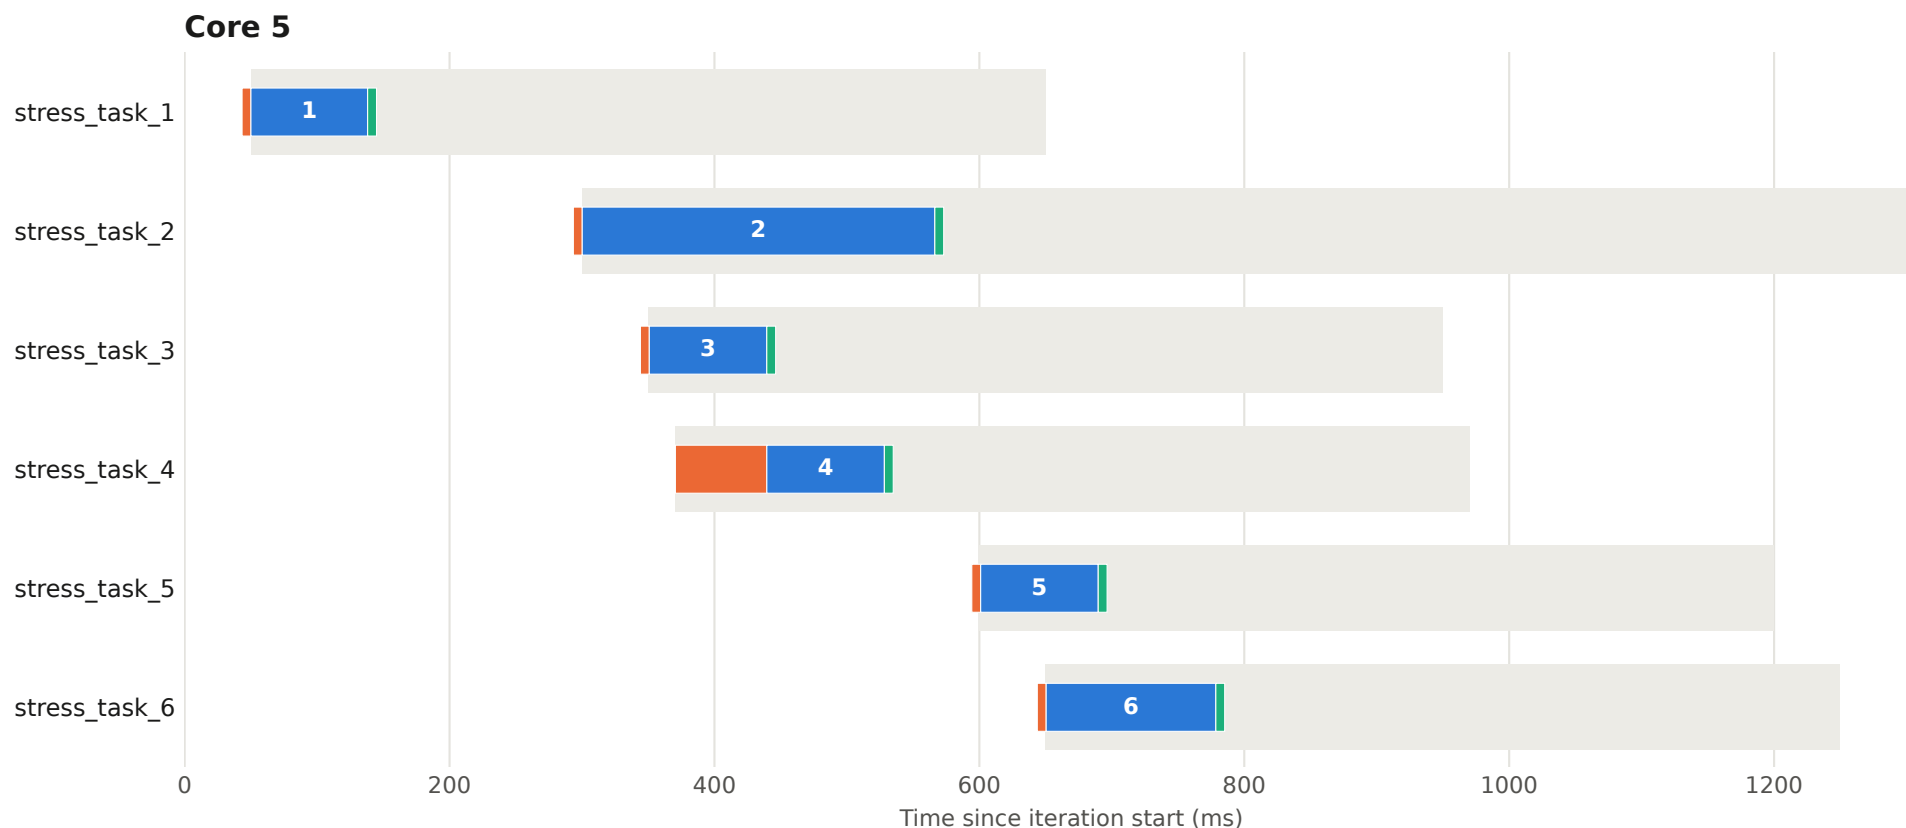


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 75 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

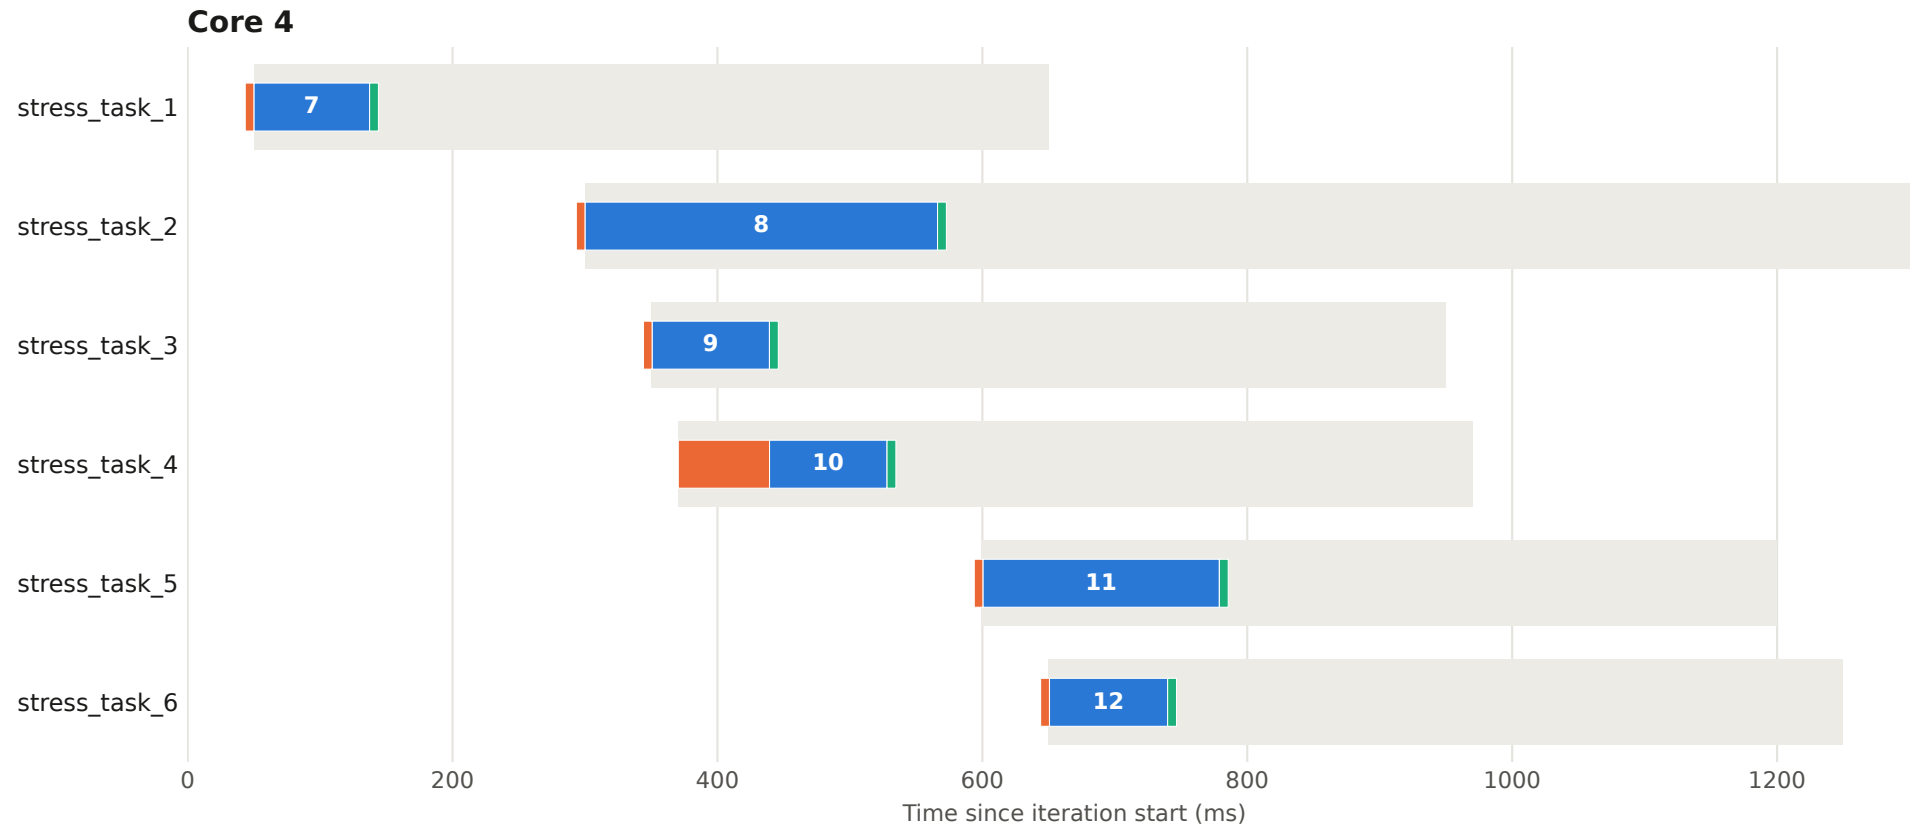


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 75 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

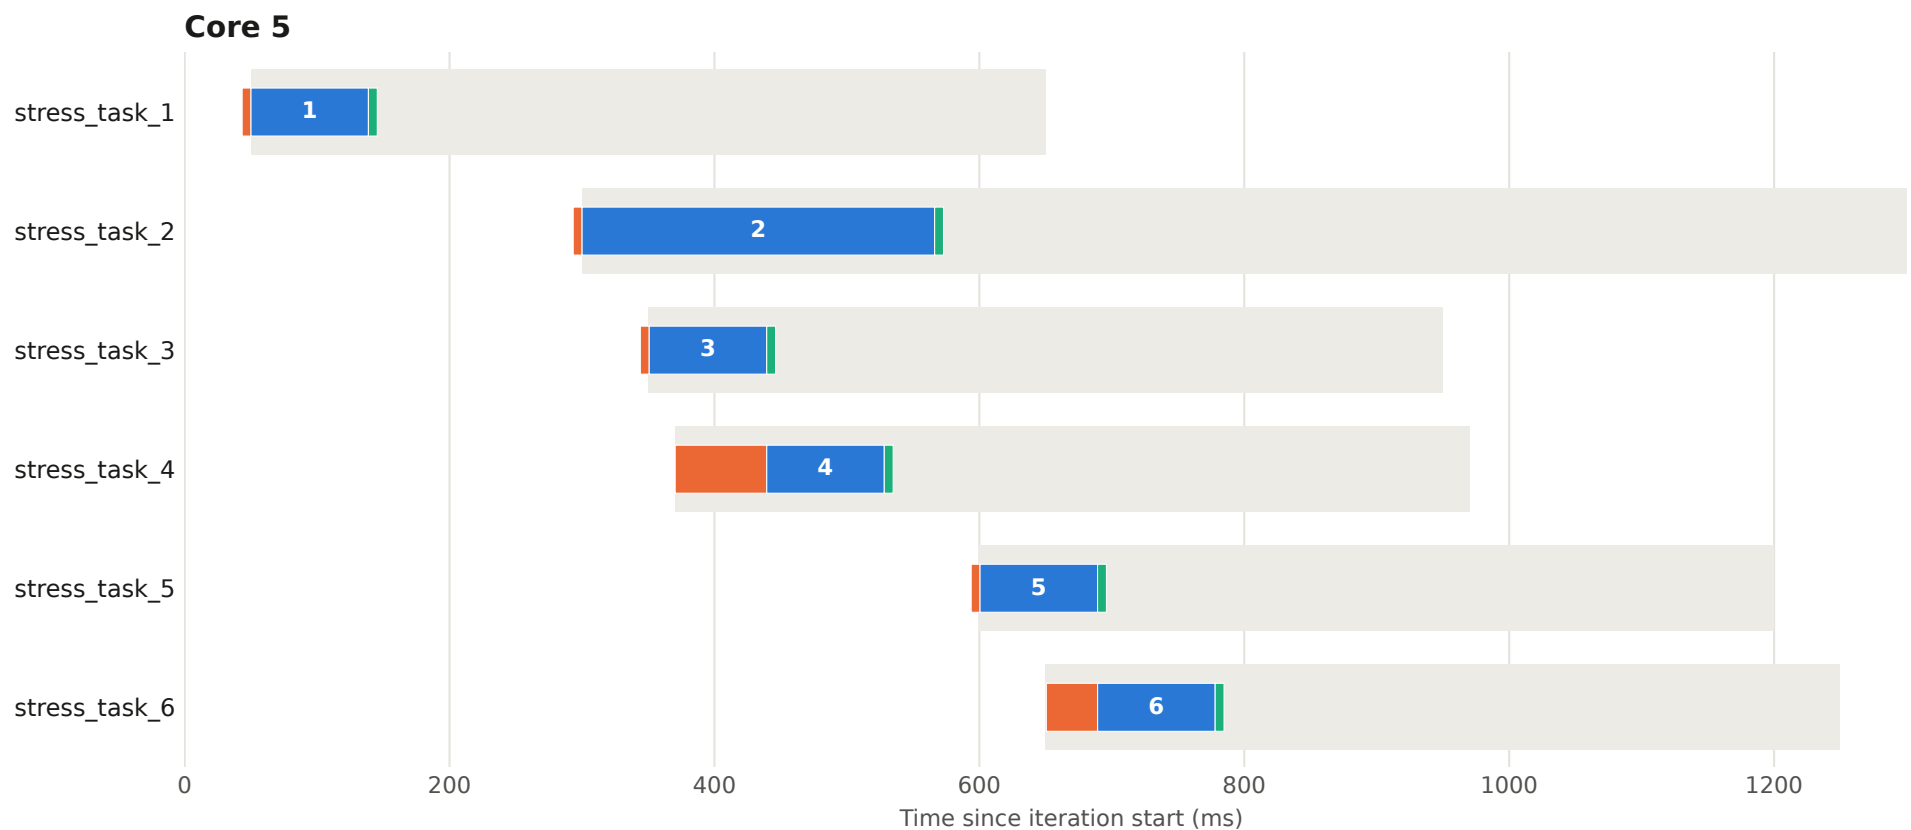


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 76 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

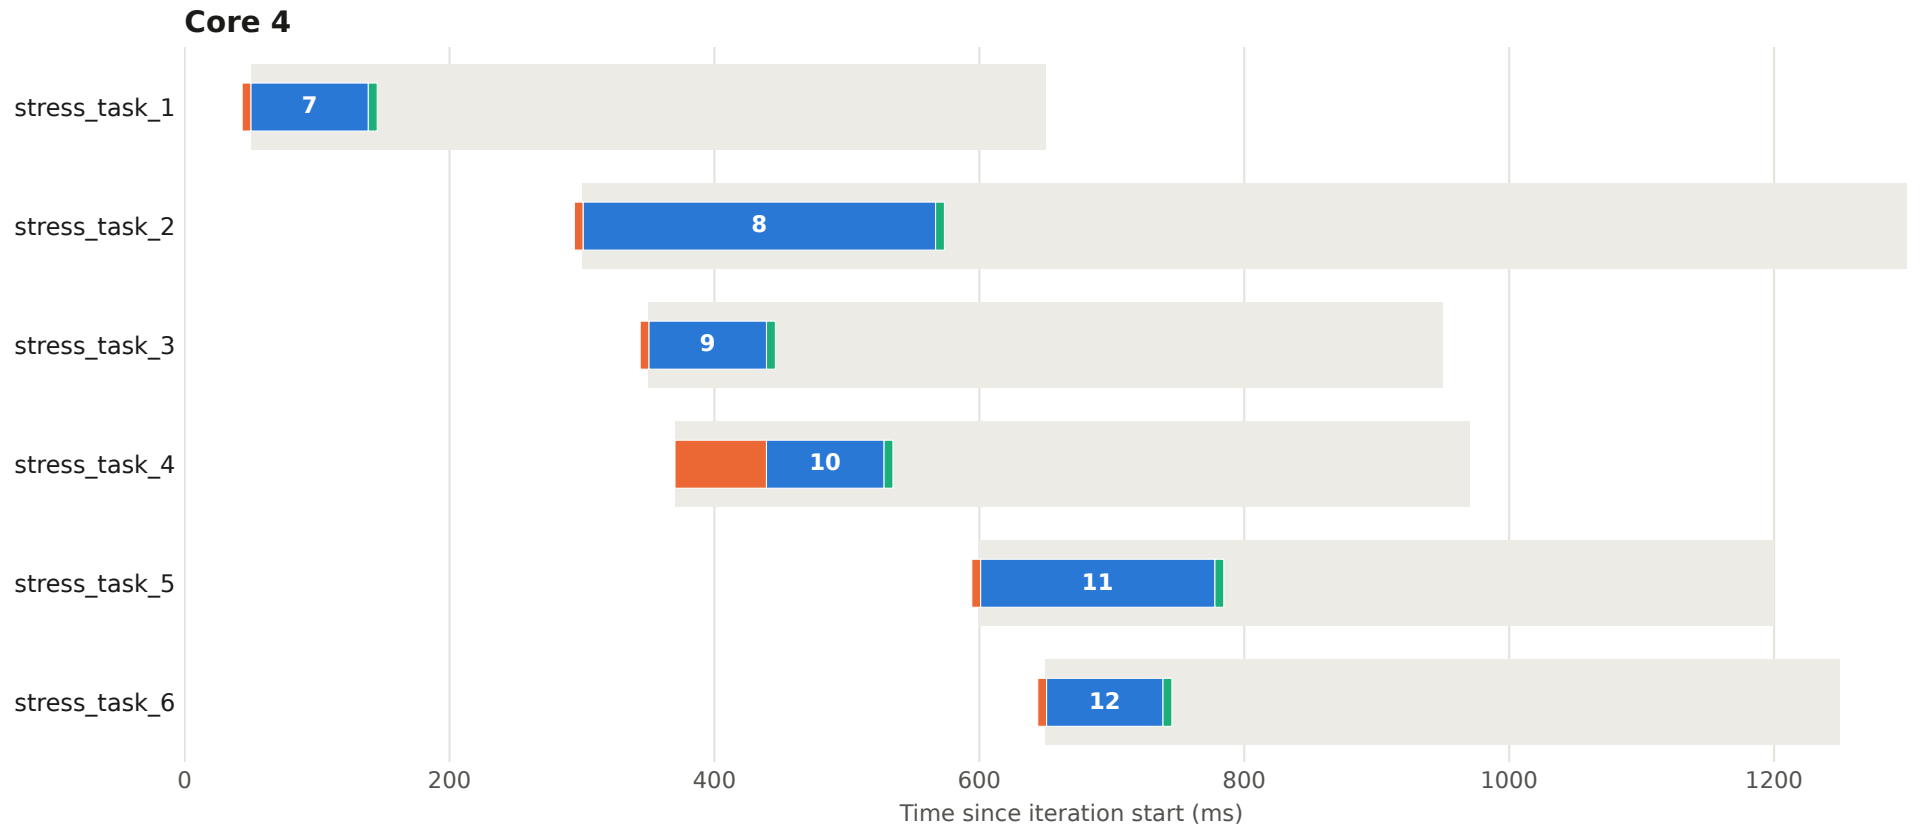


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 76 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

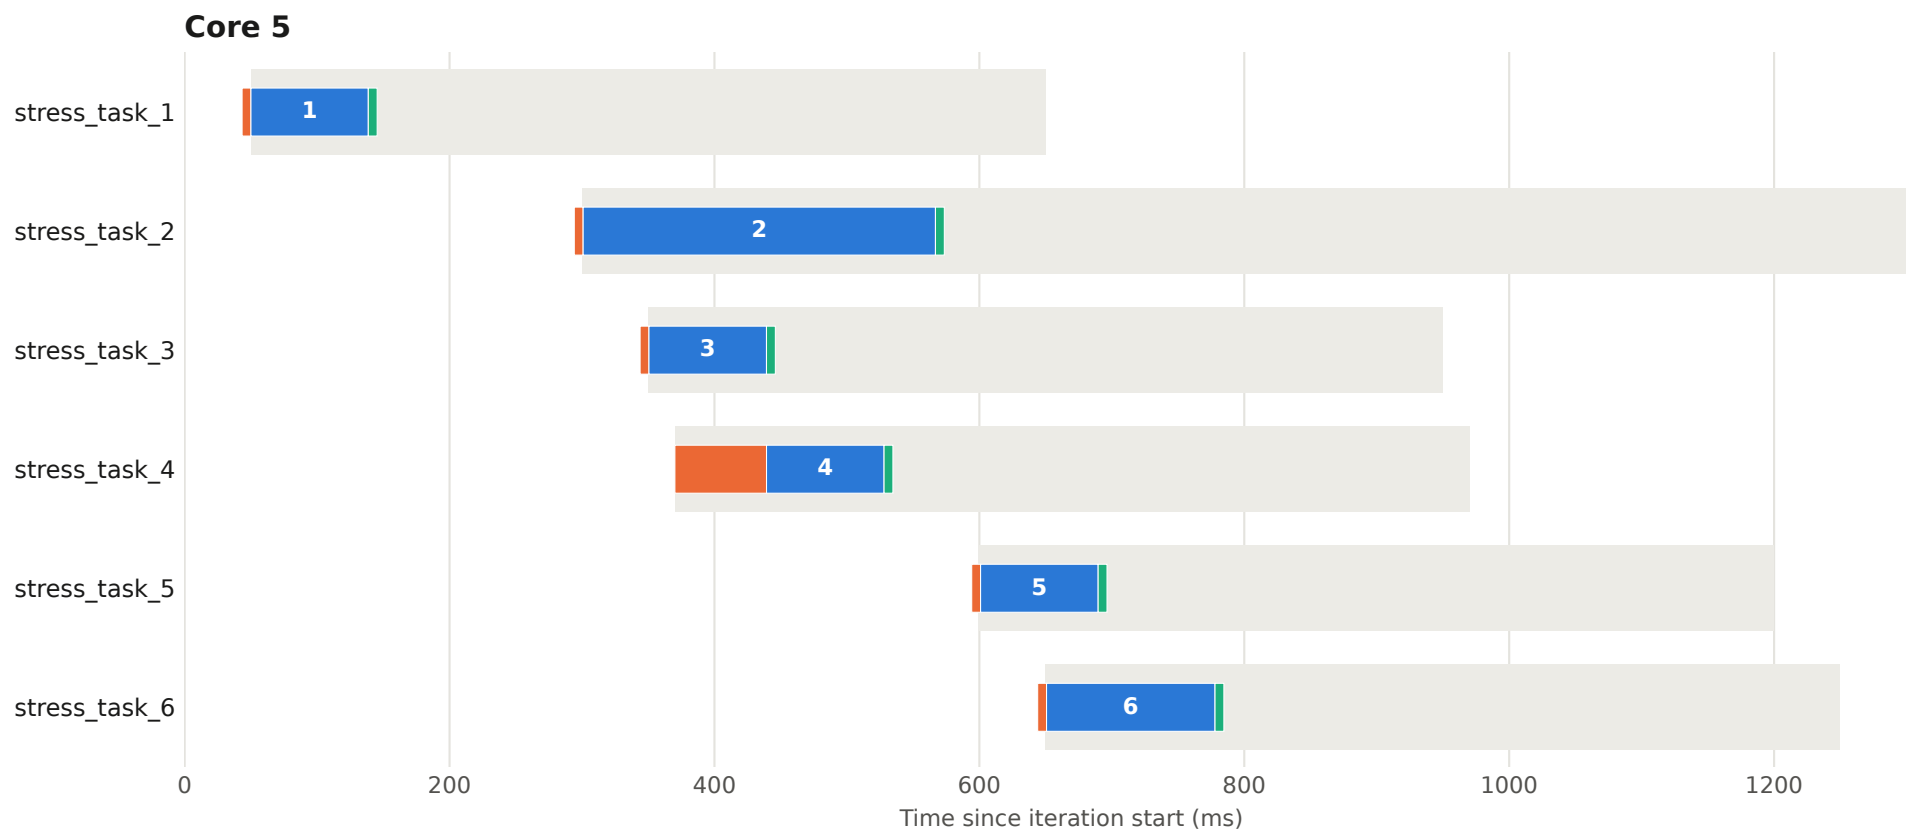


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 77 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

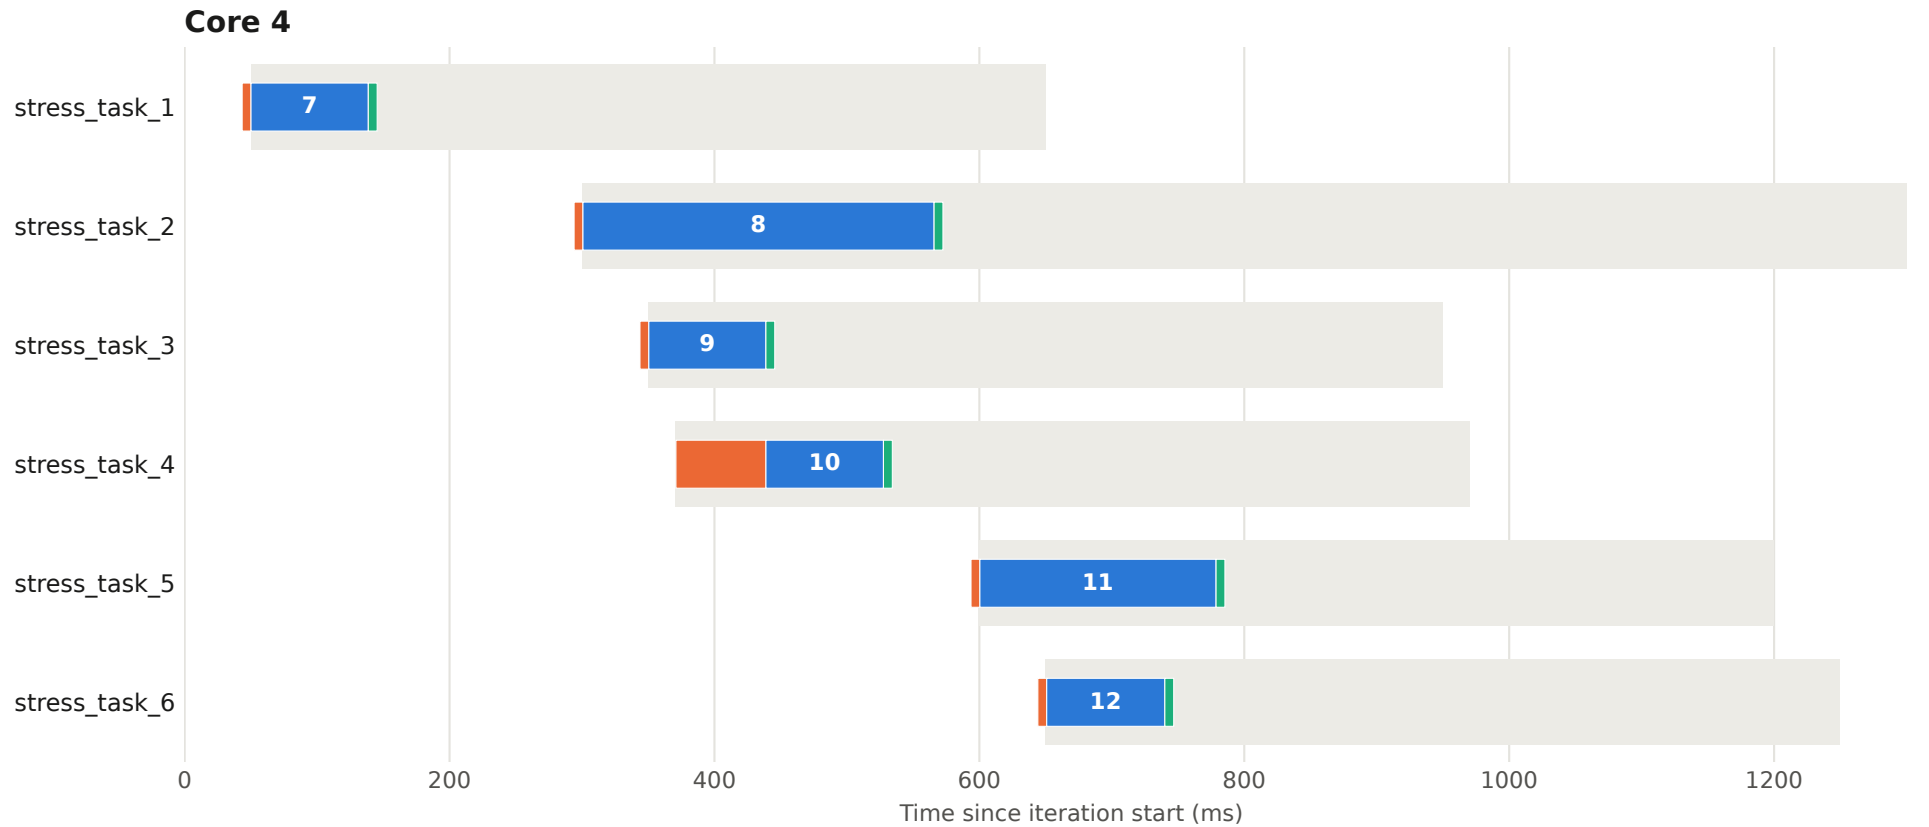


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 77 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

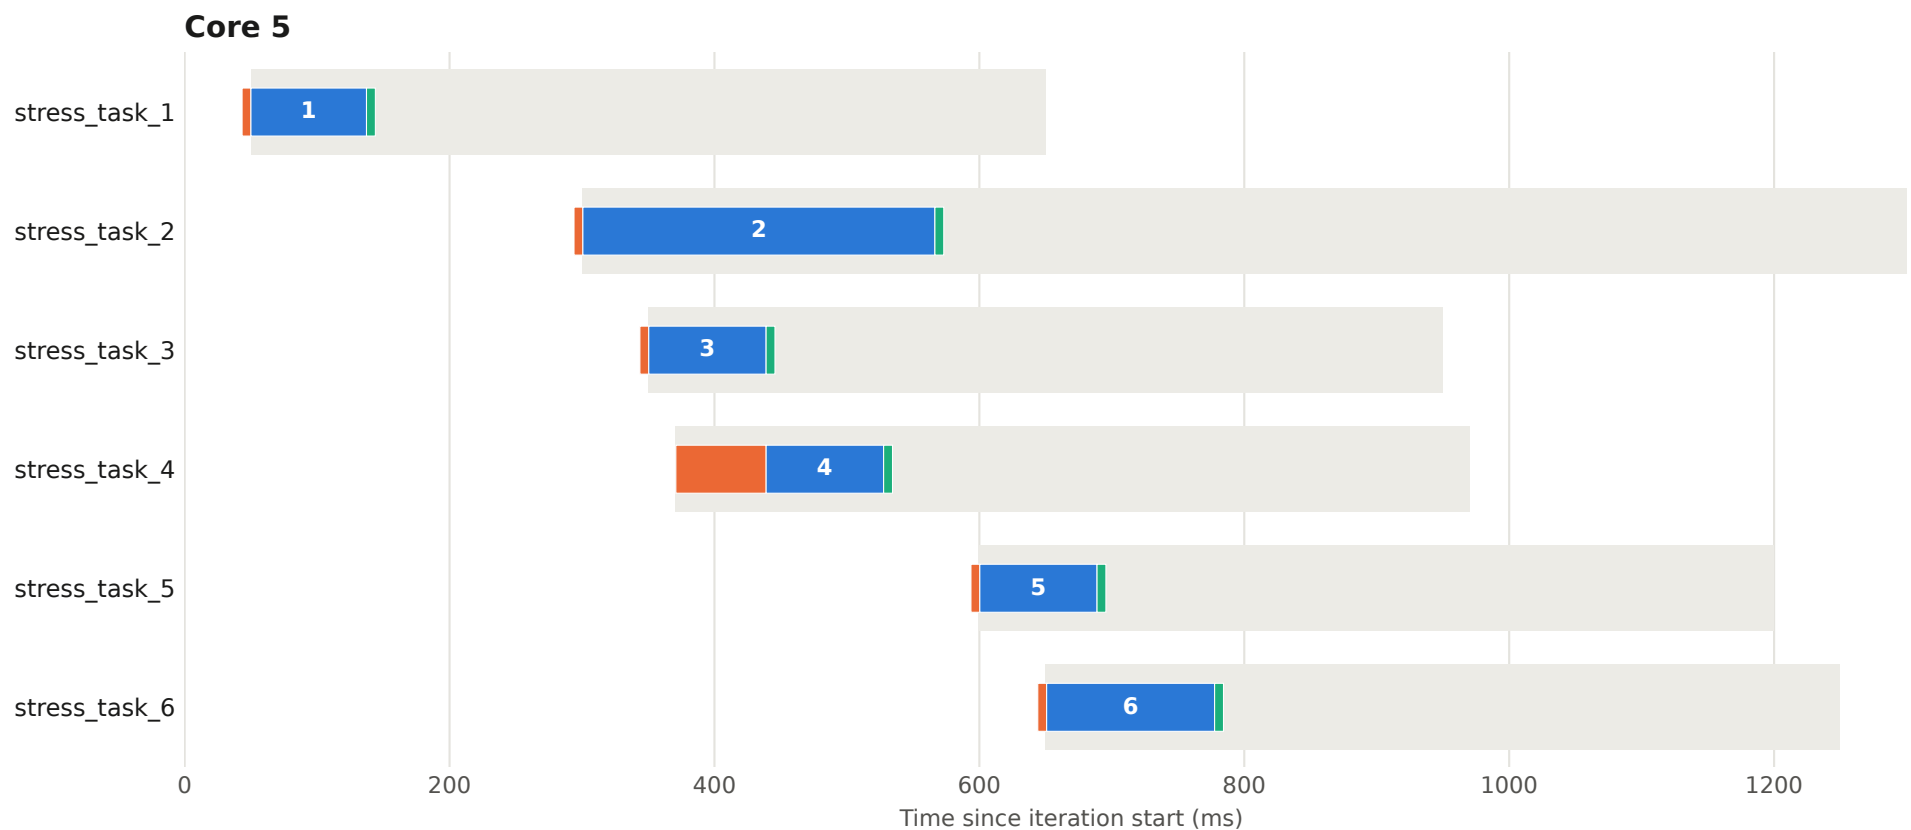


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 78 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

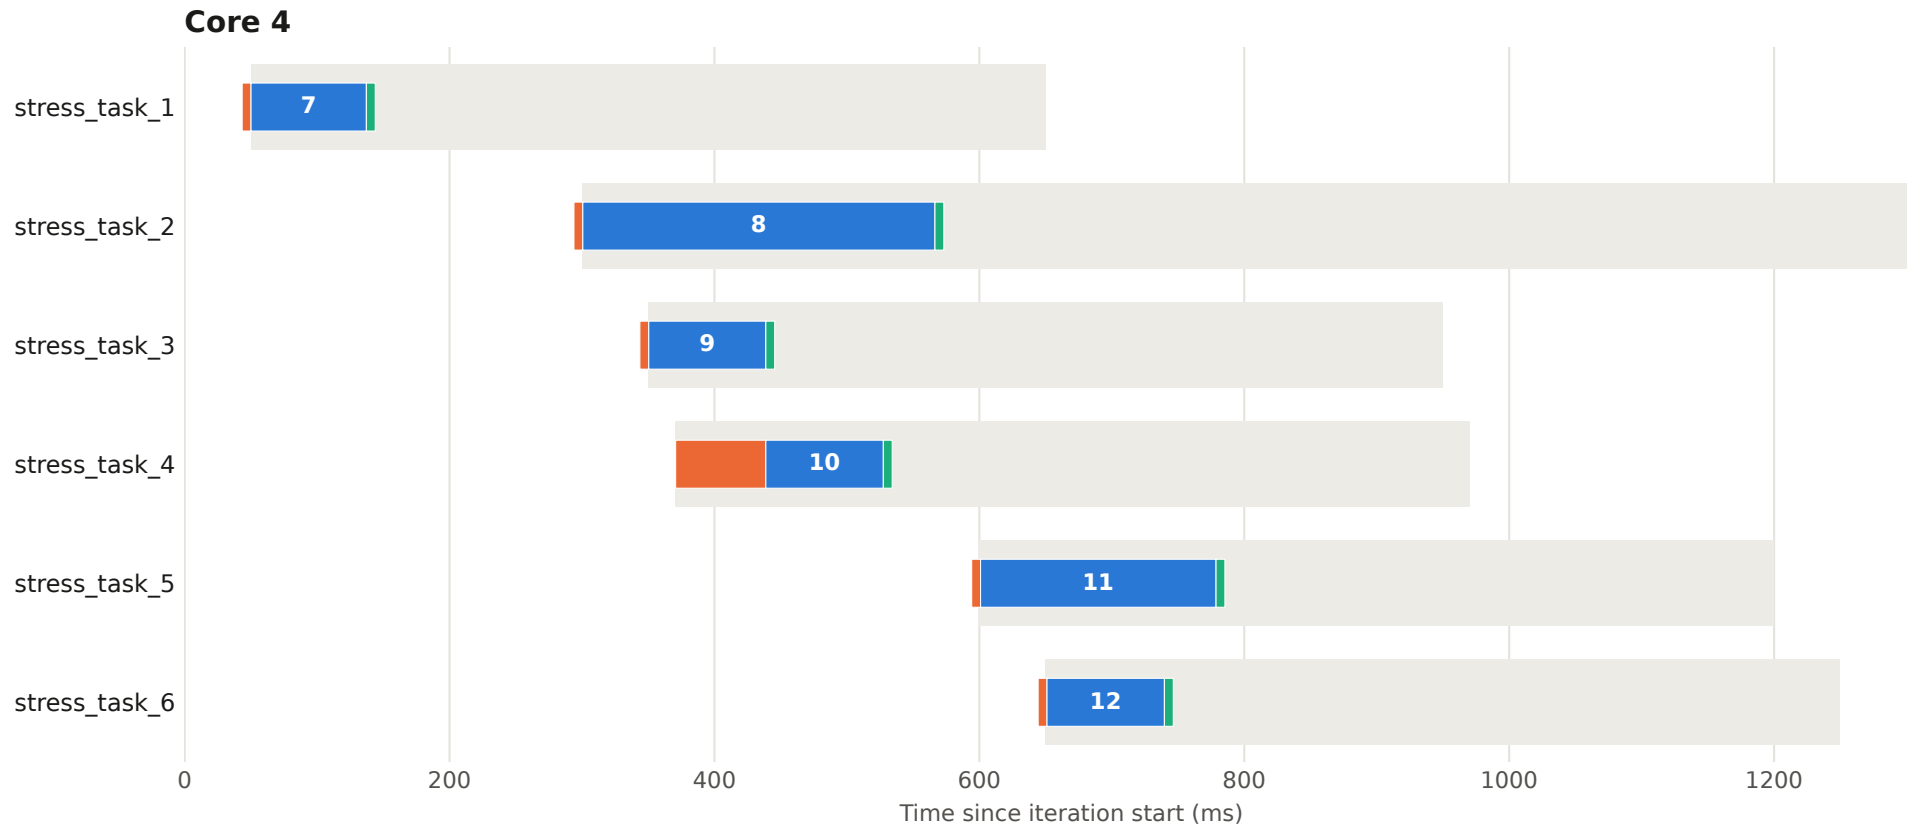


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 78 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

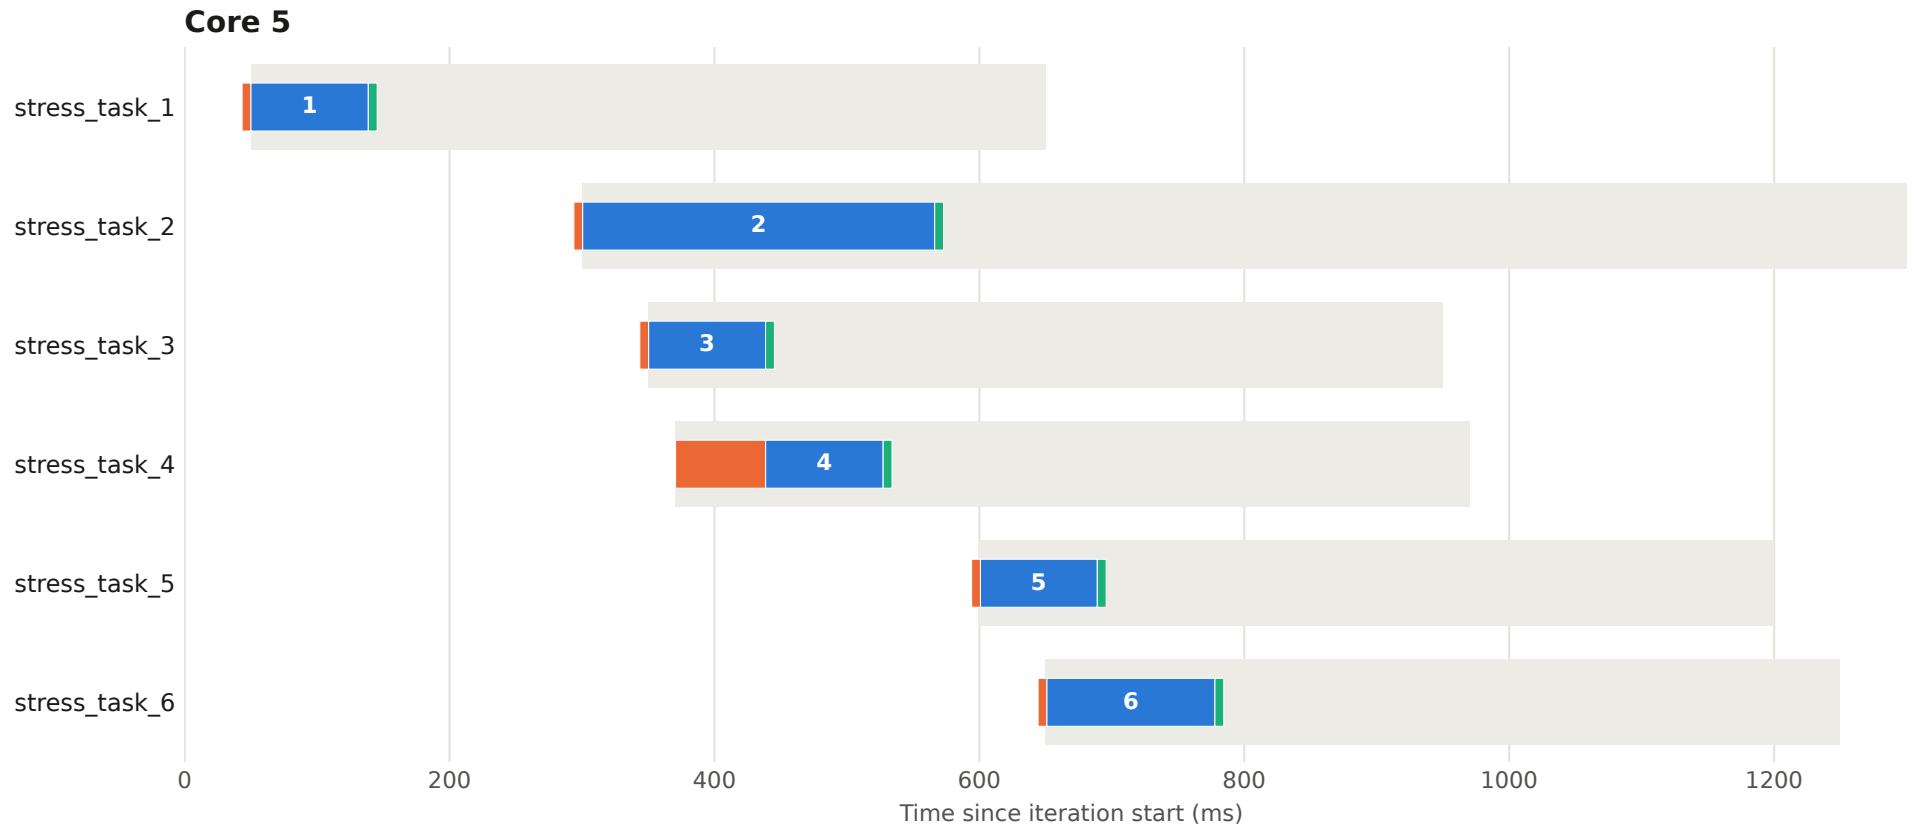


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 79 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

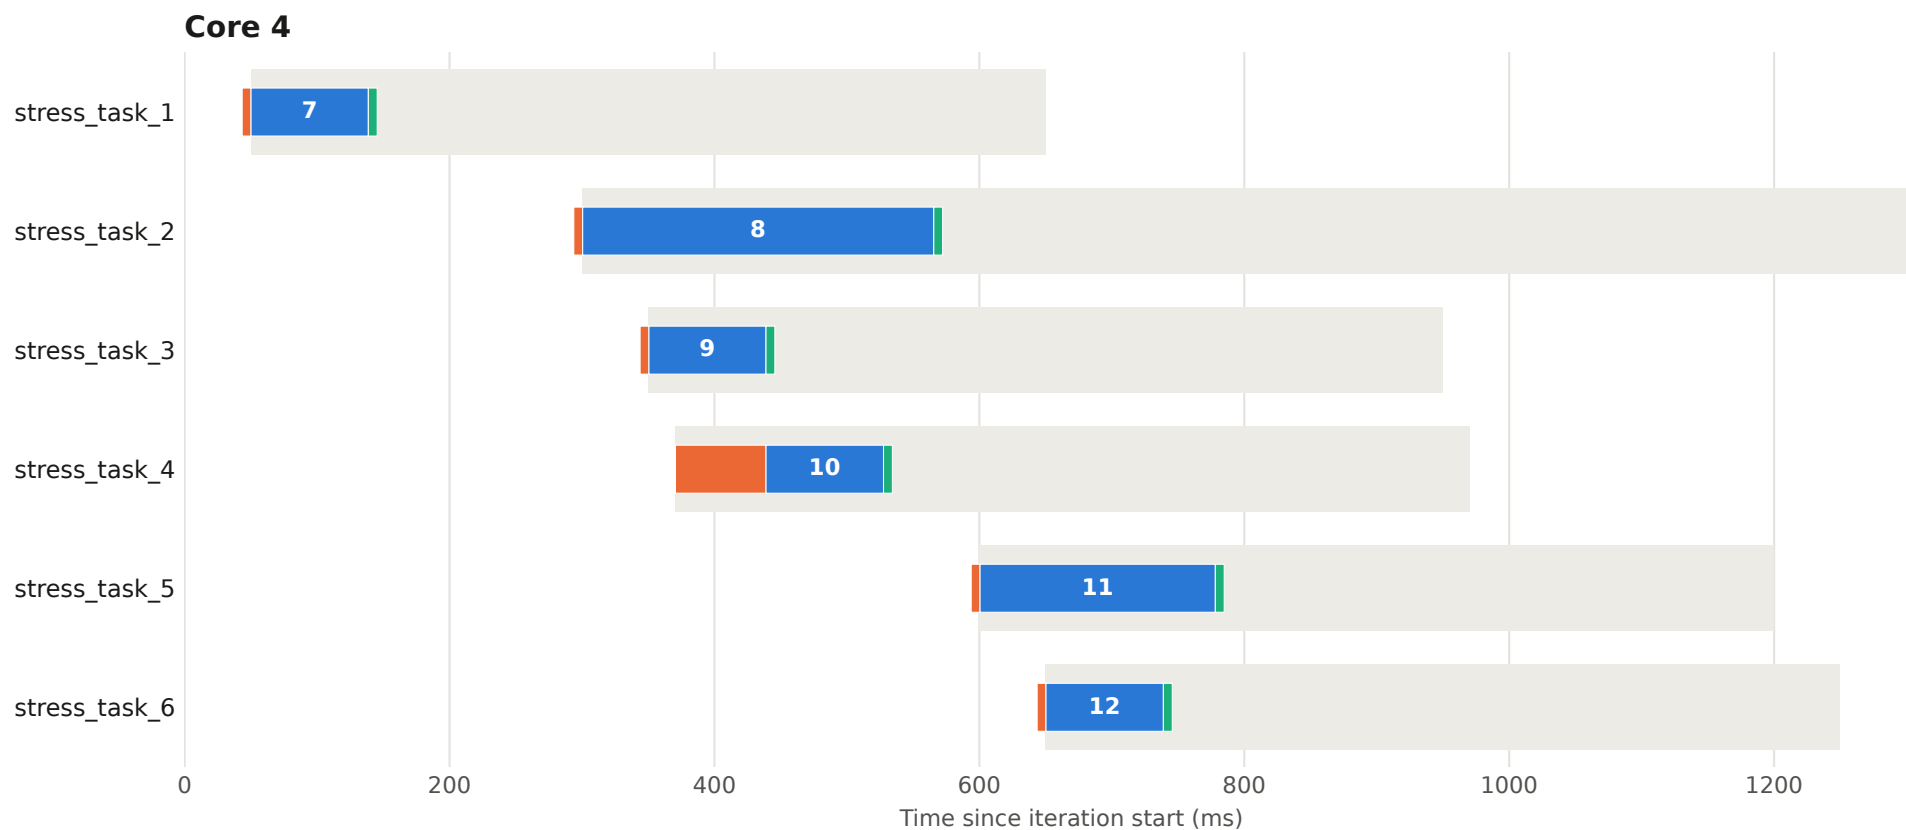


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 79 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

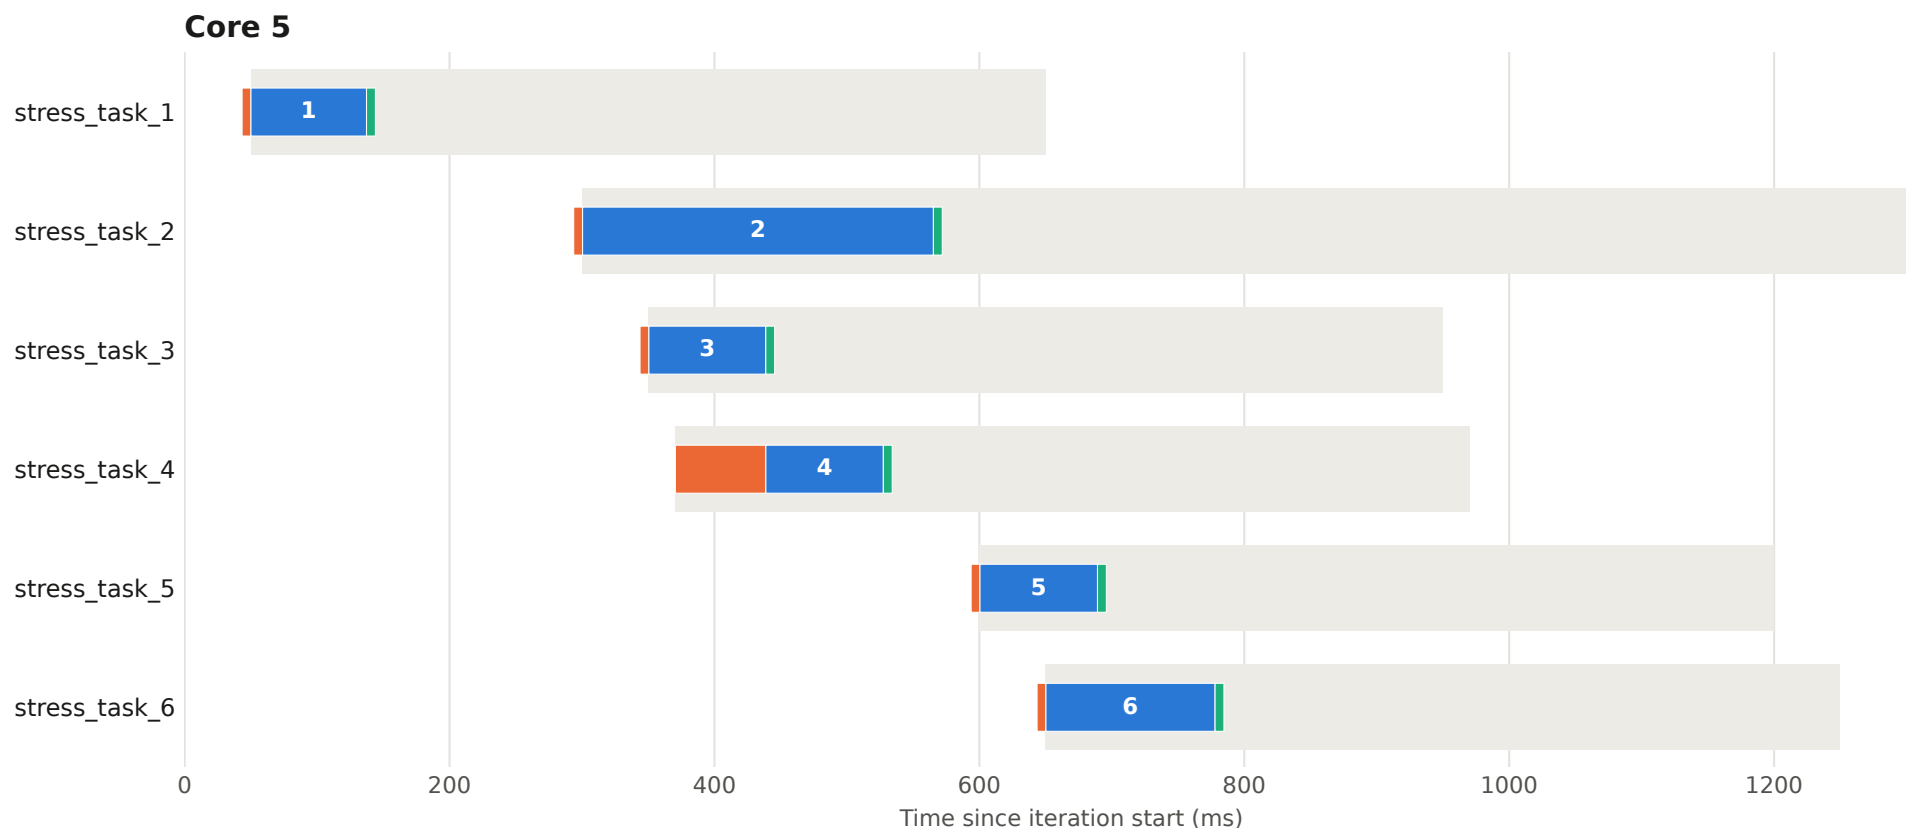


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 80 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

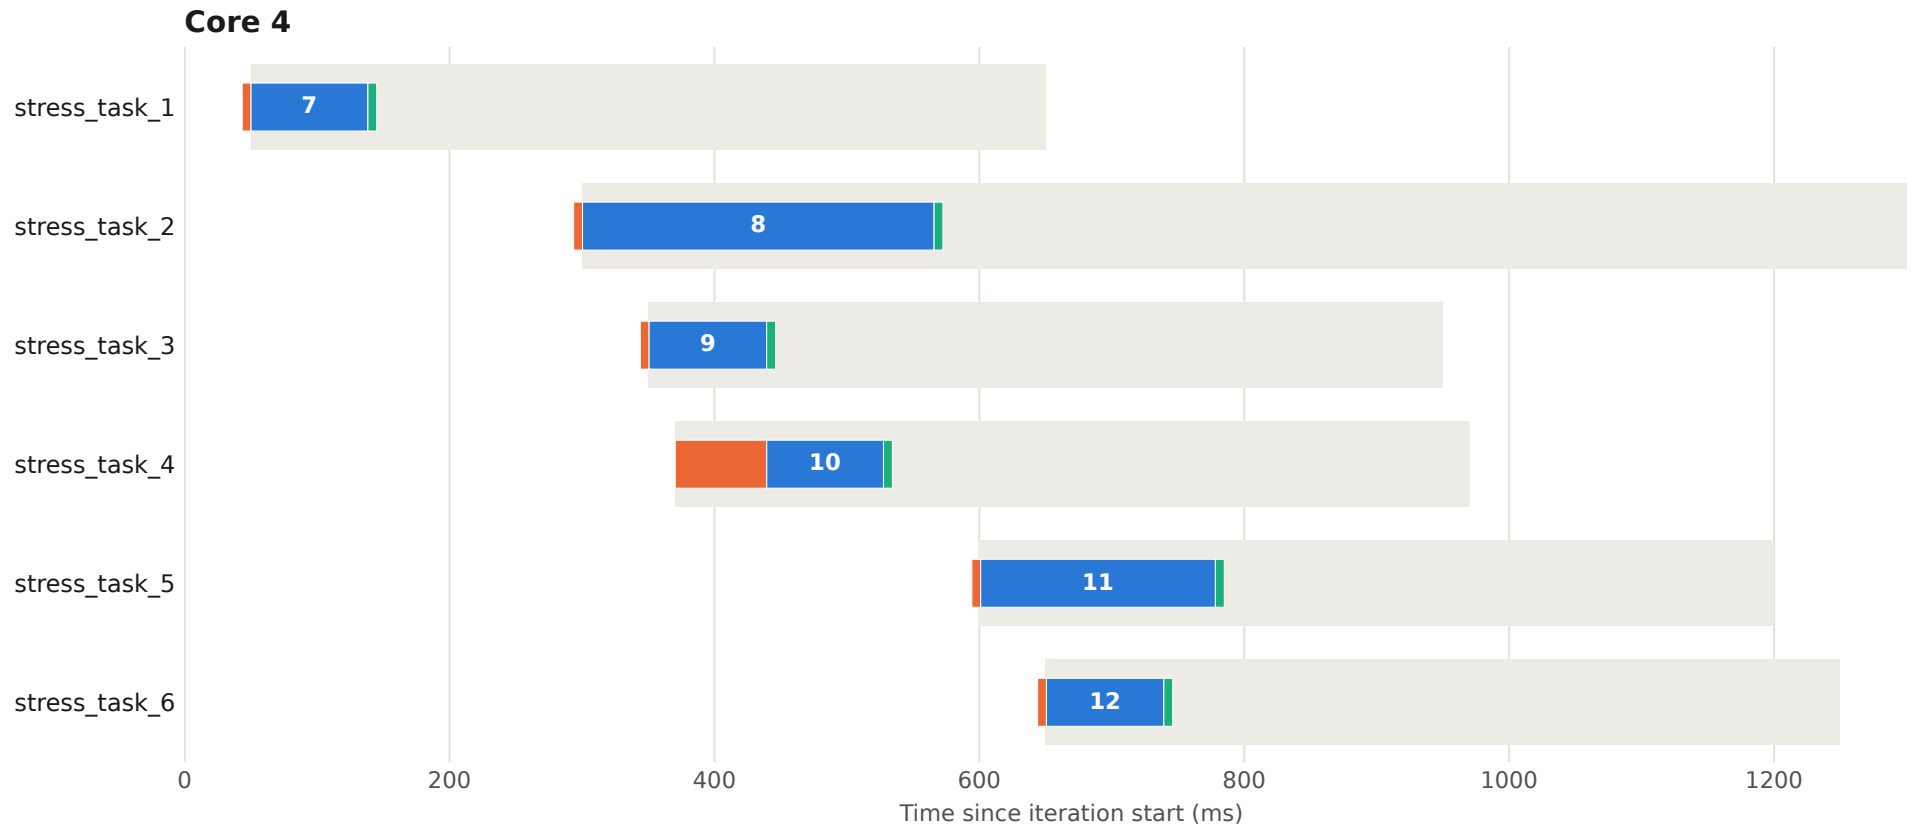


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 80 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

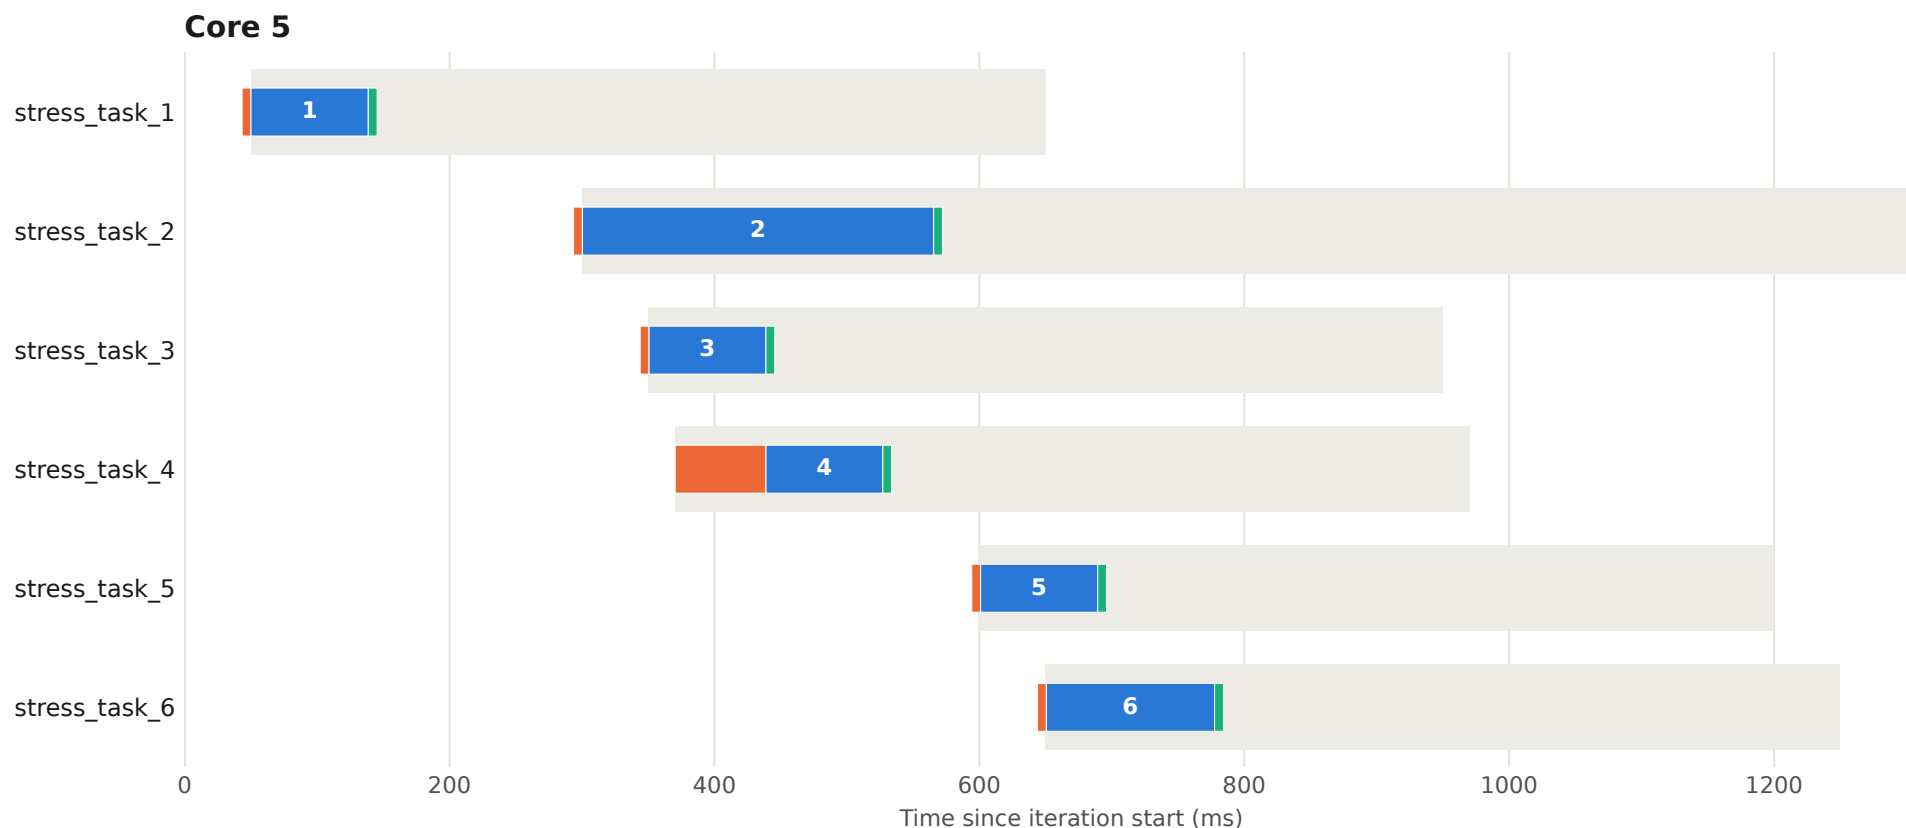


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 81 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

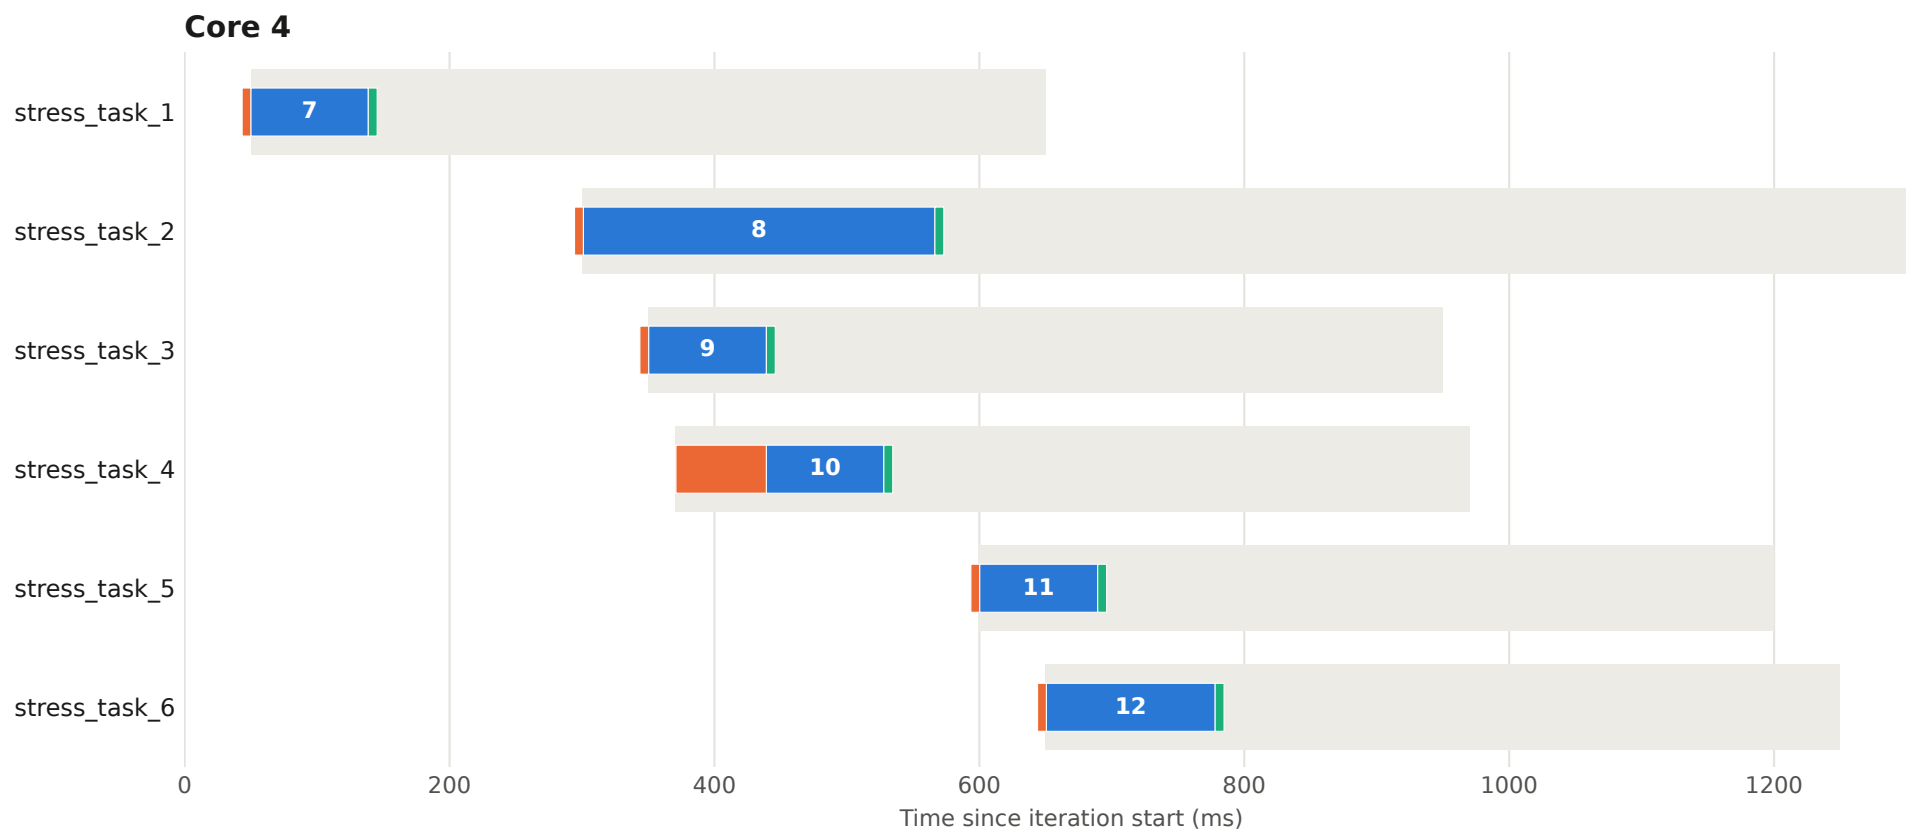


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 81 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

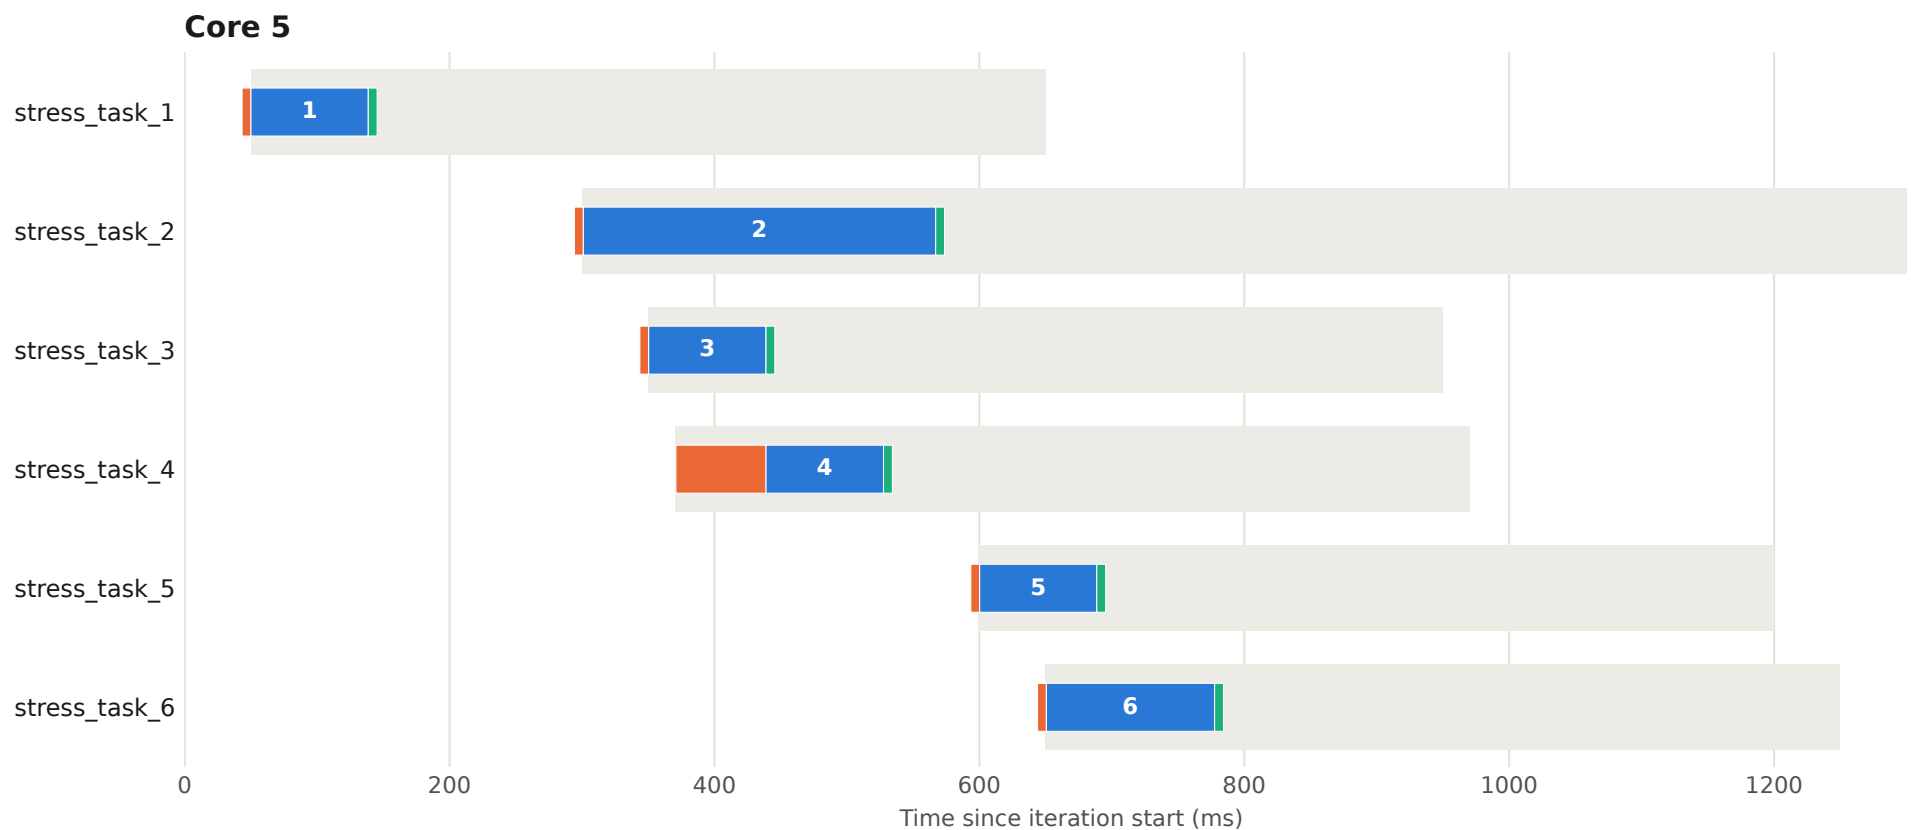


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 82 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

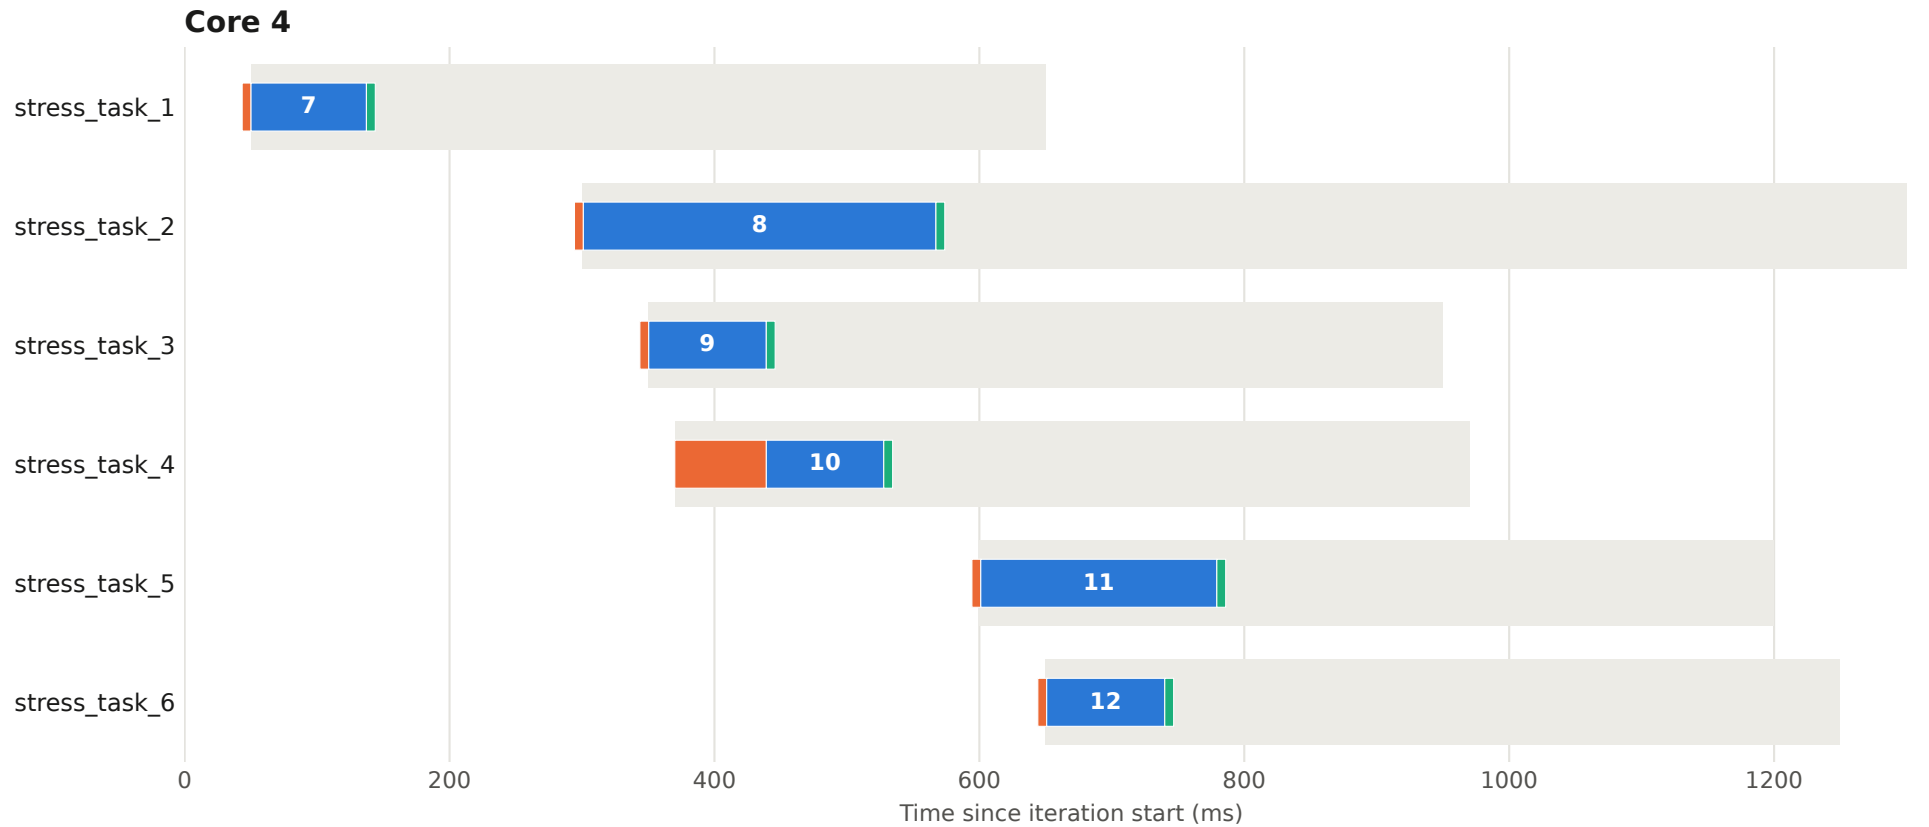


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 82 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

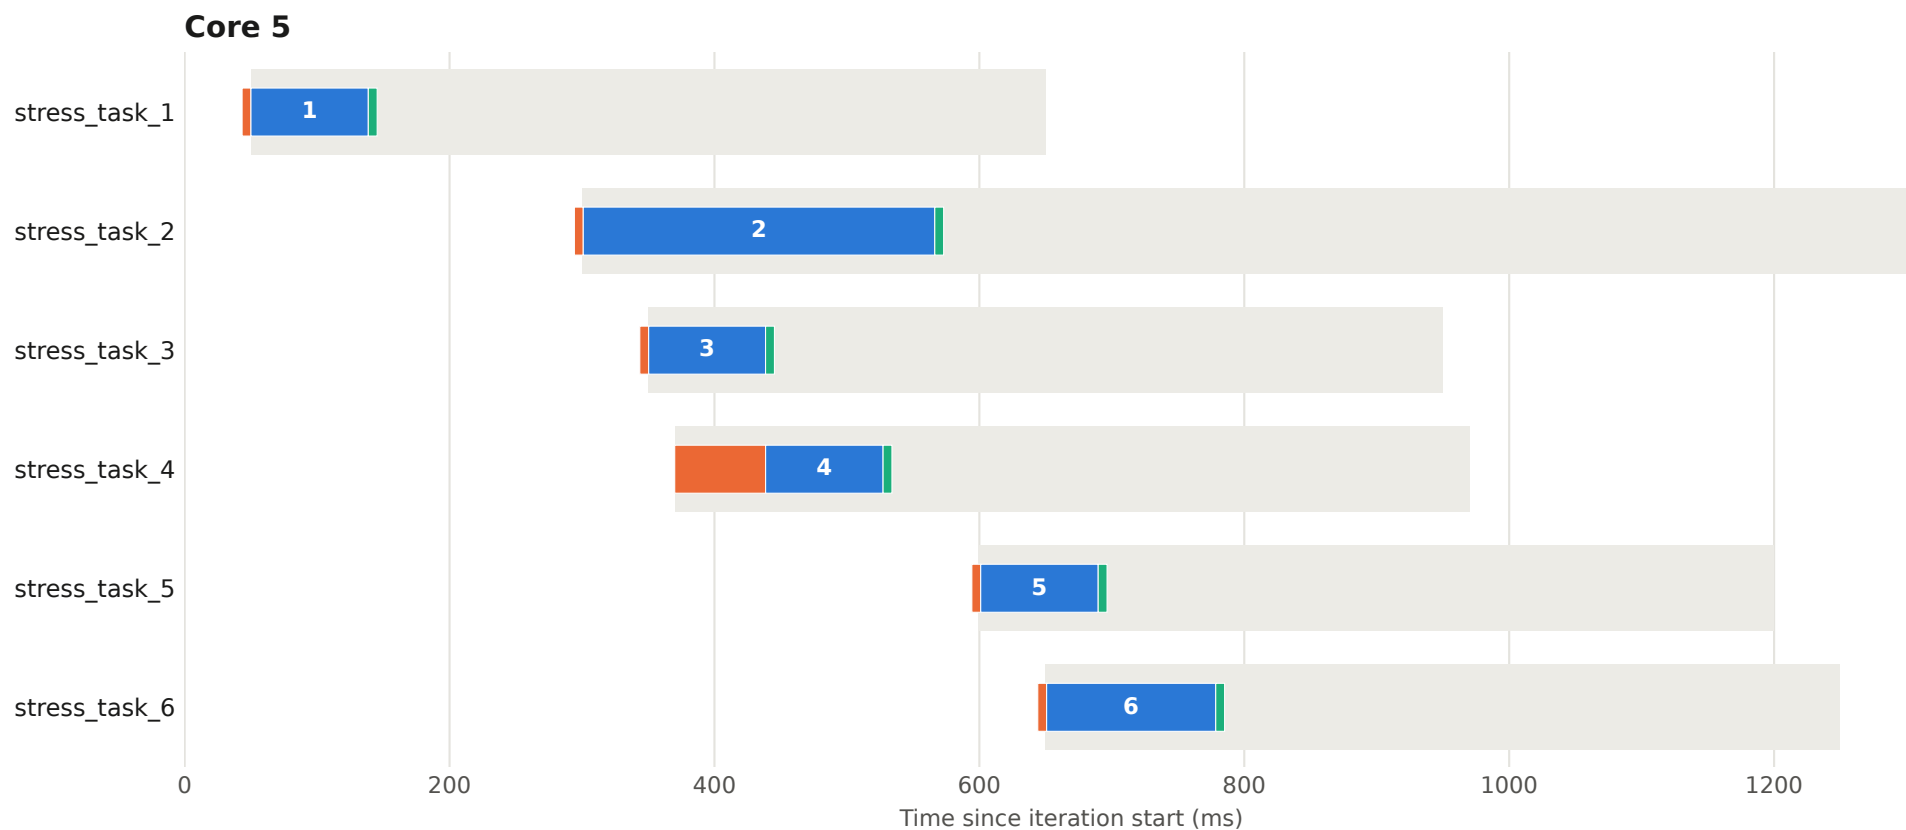


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 83 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

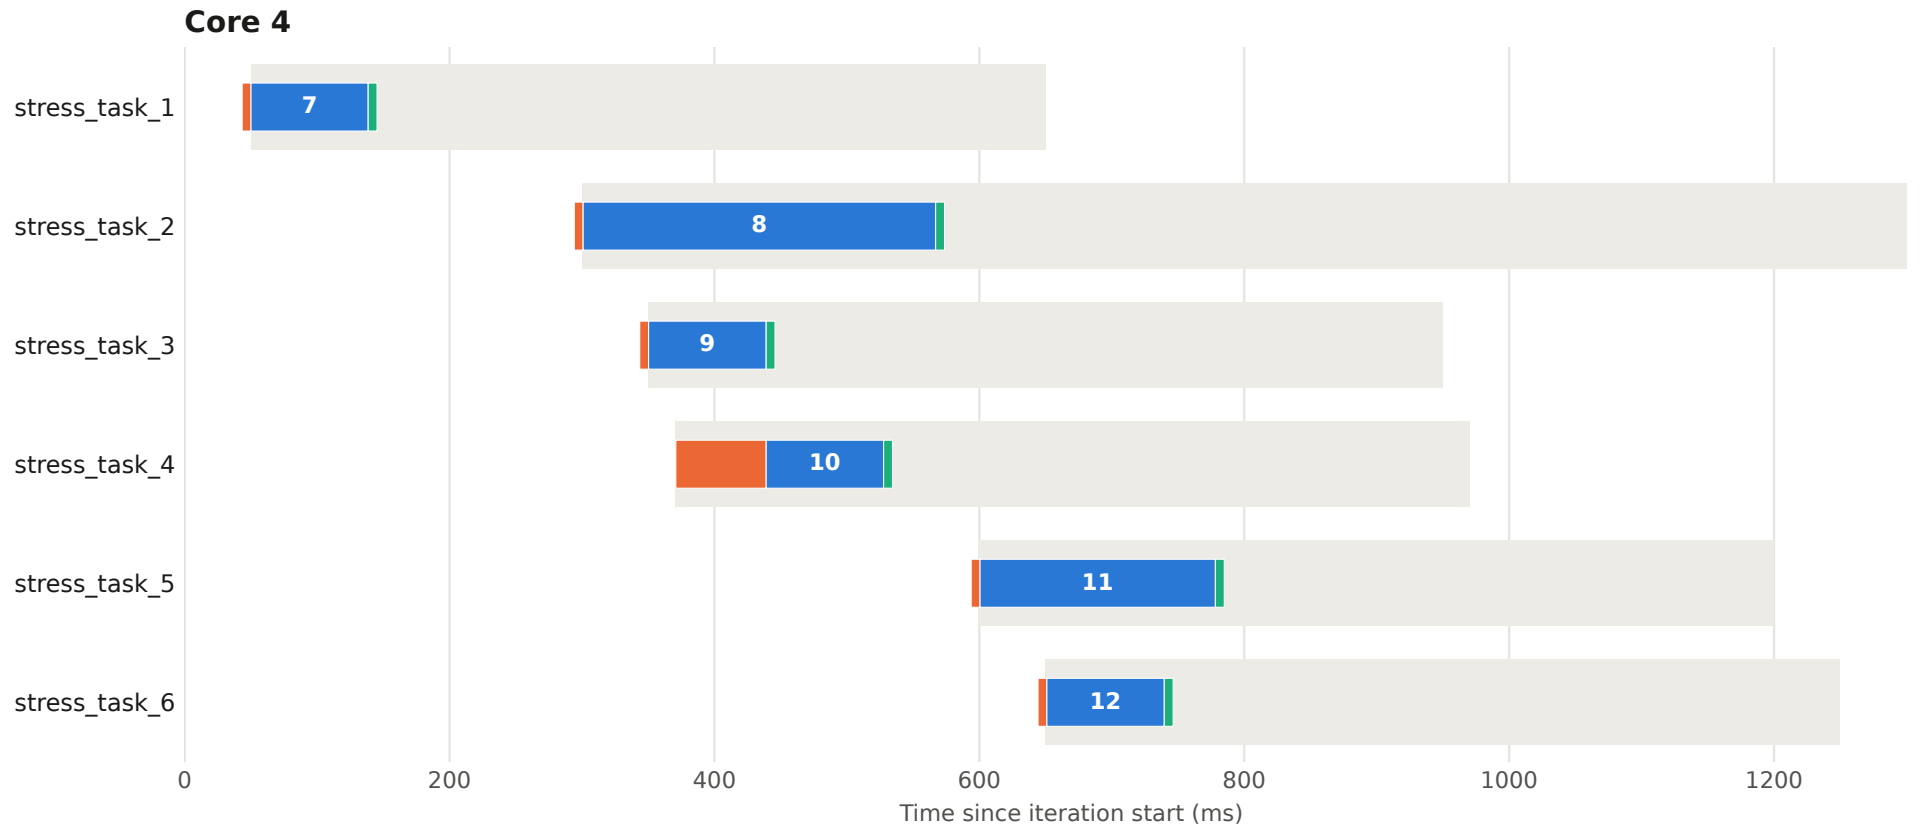


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 83 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

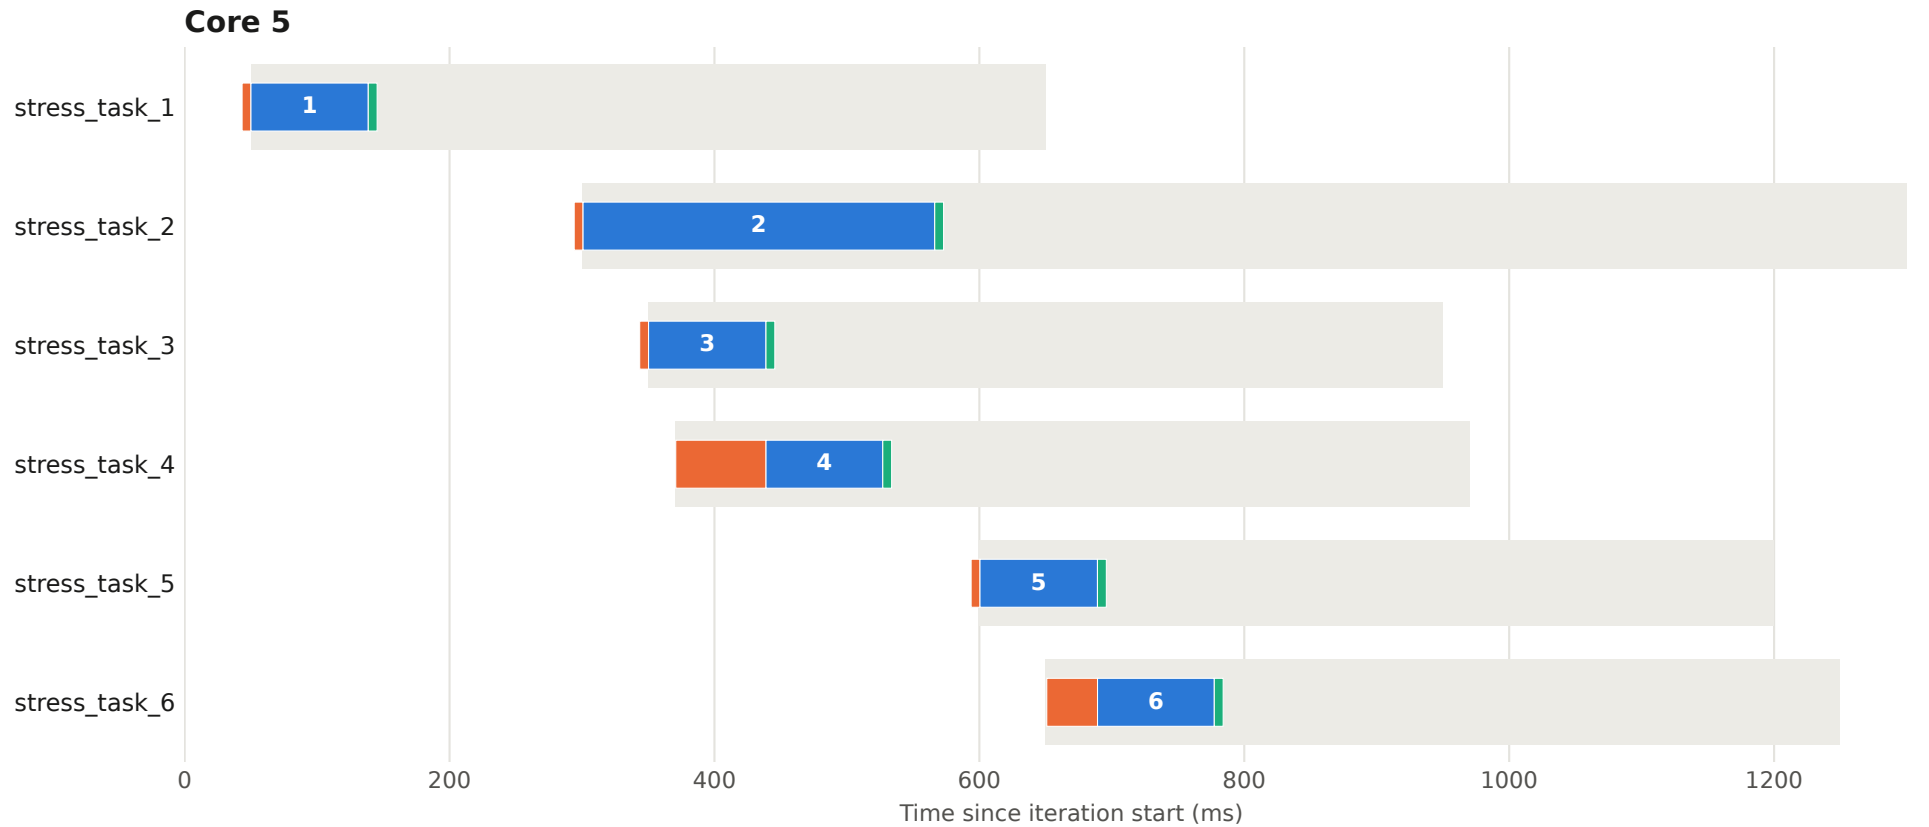


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 84 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

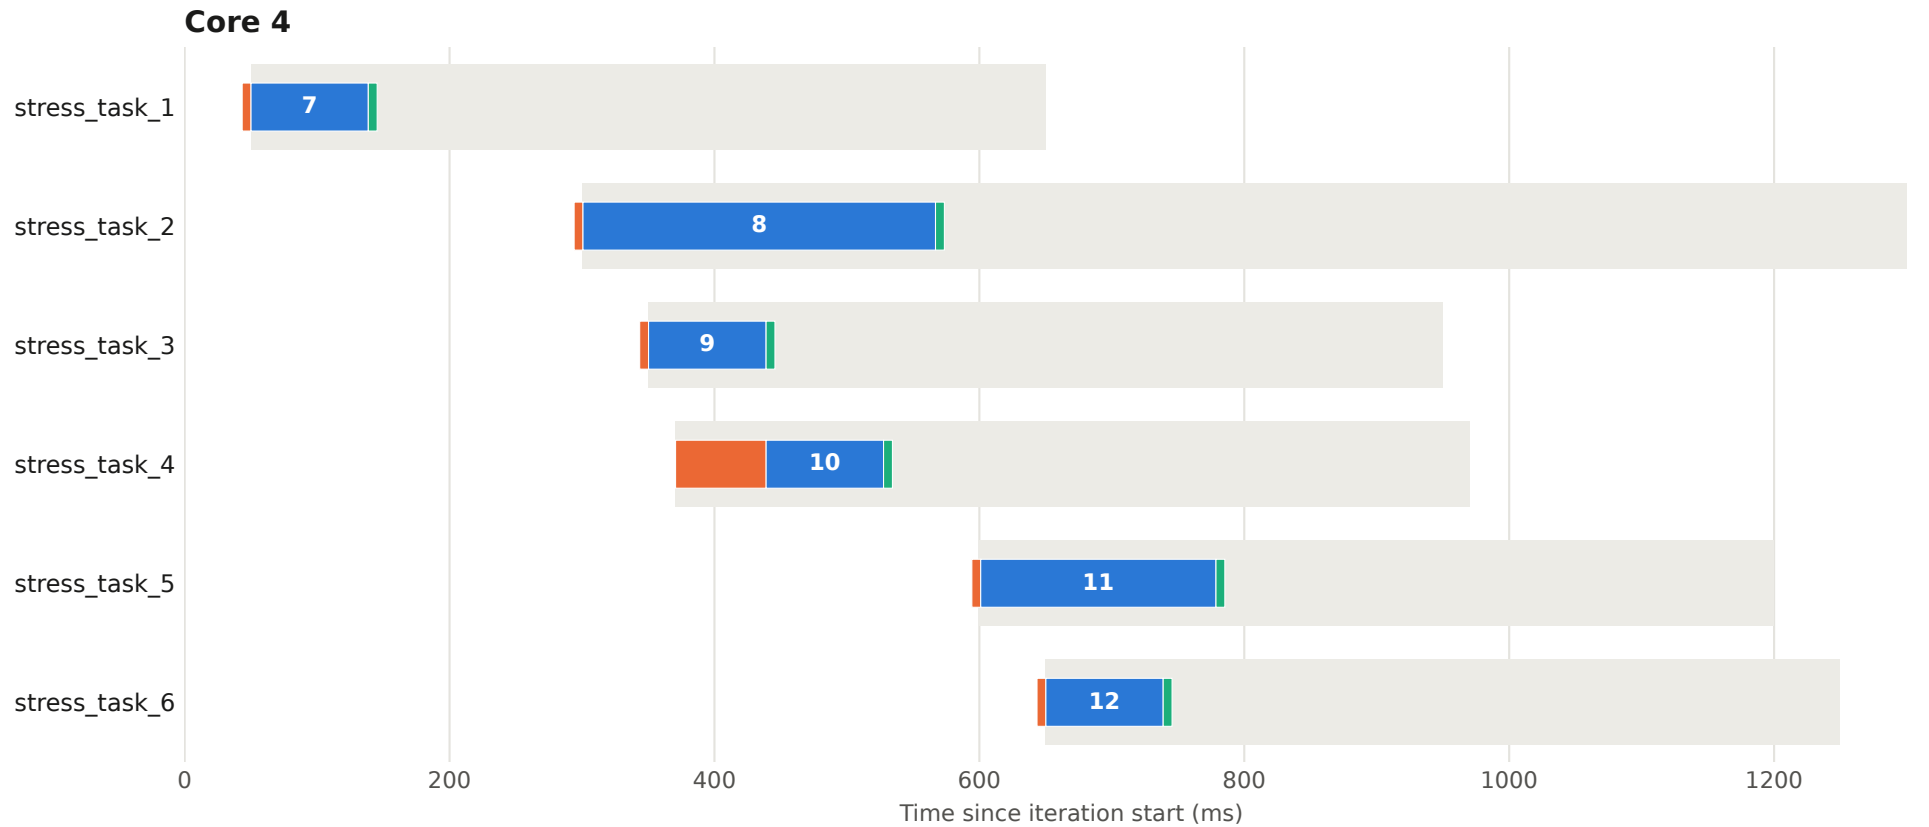


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 84 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

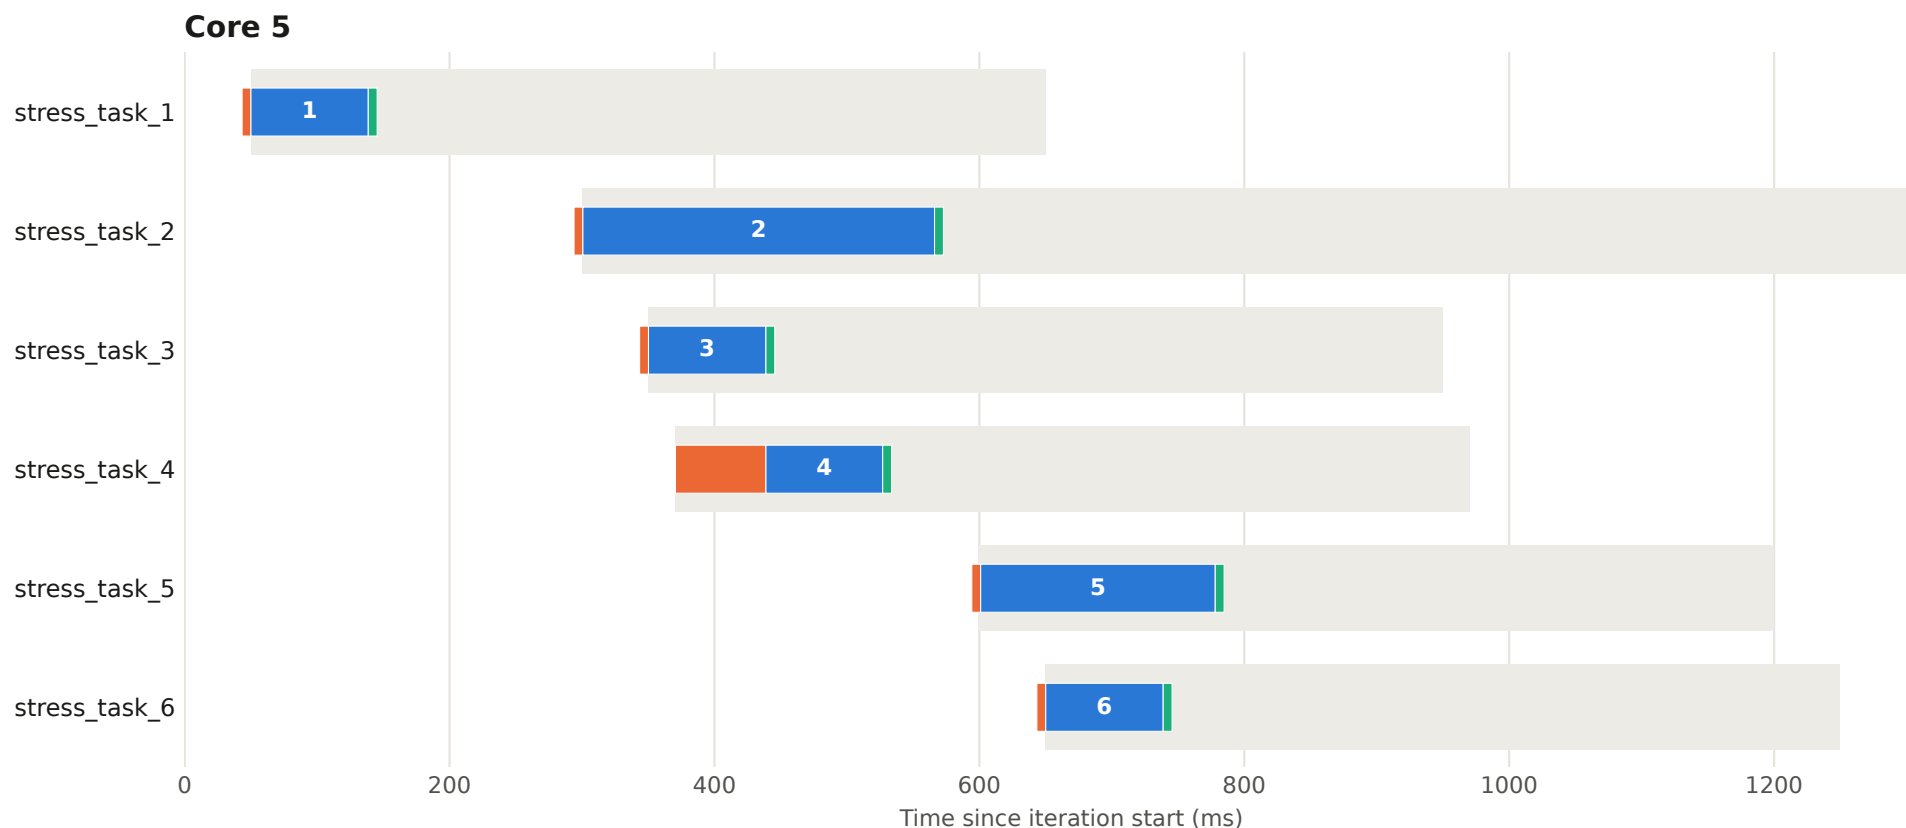


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 85 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

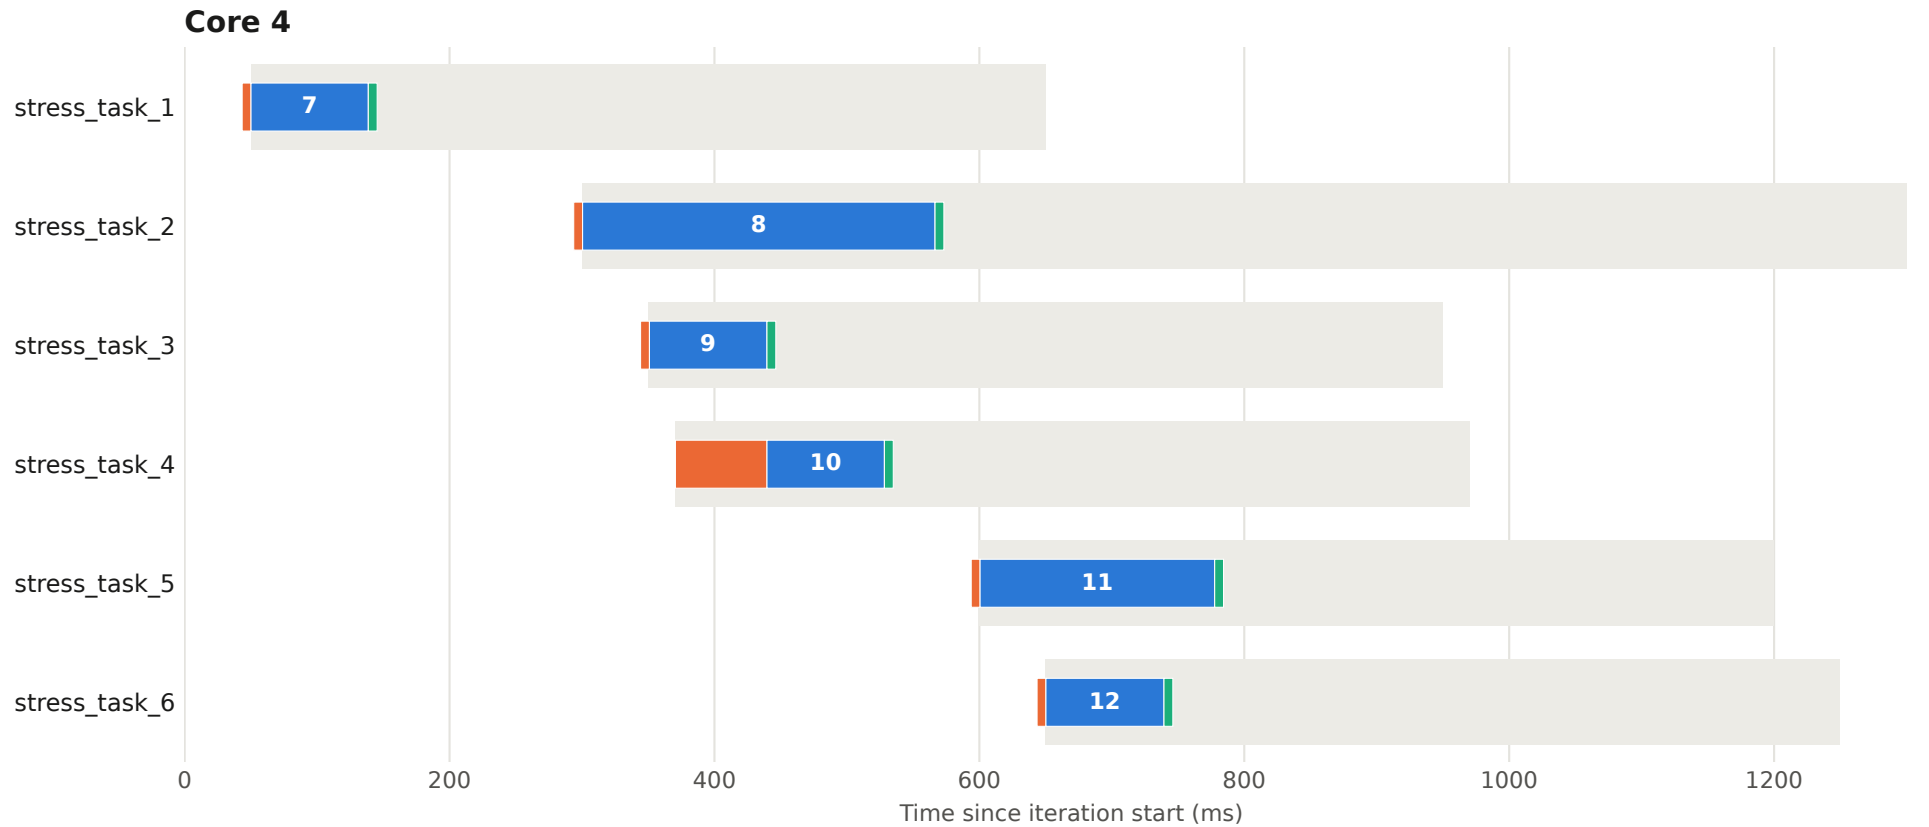


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 85 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

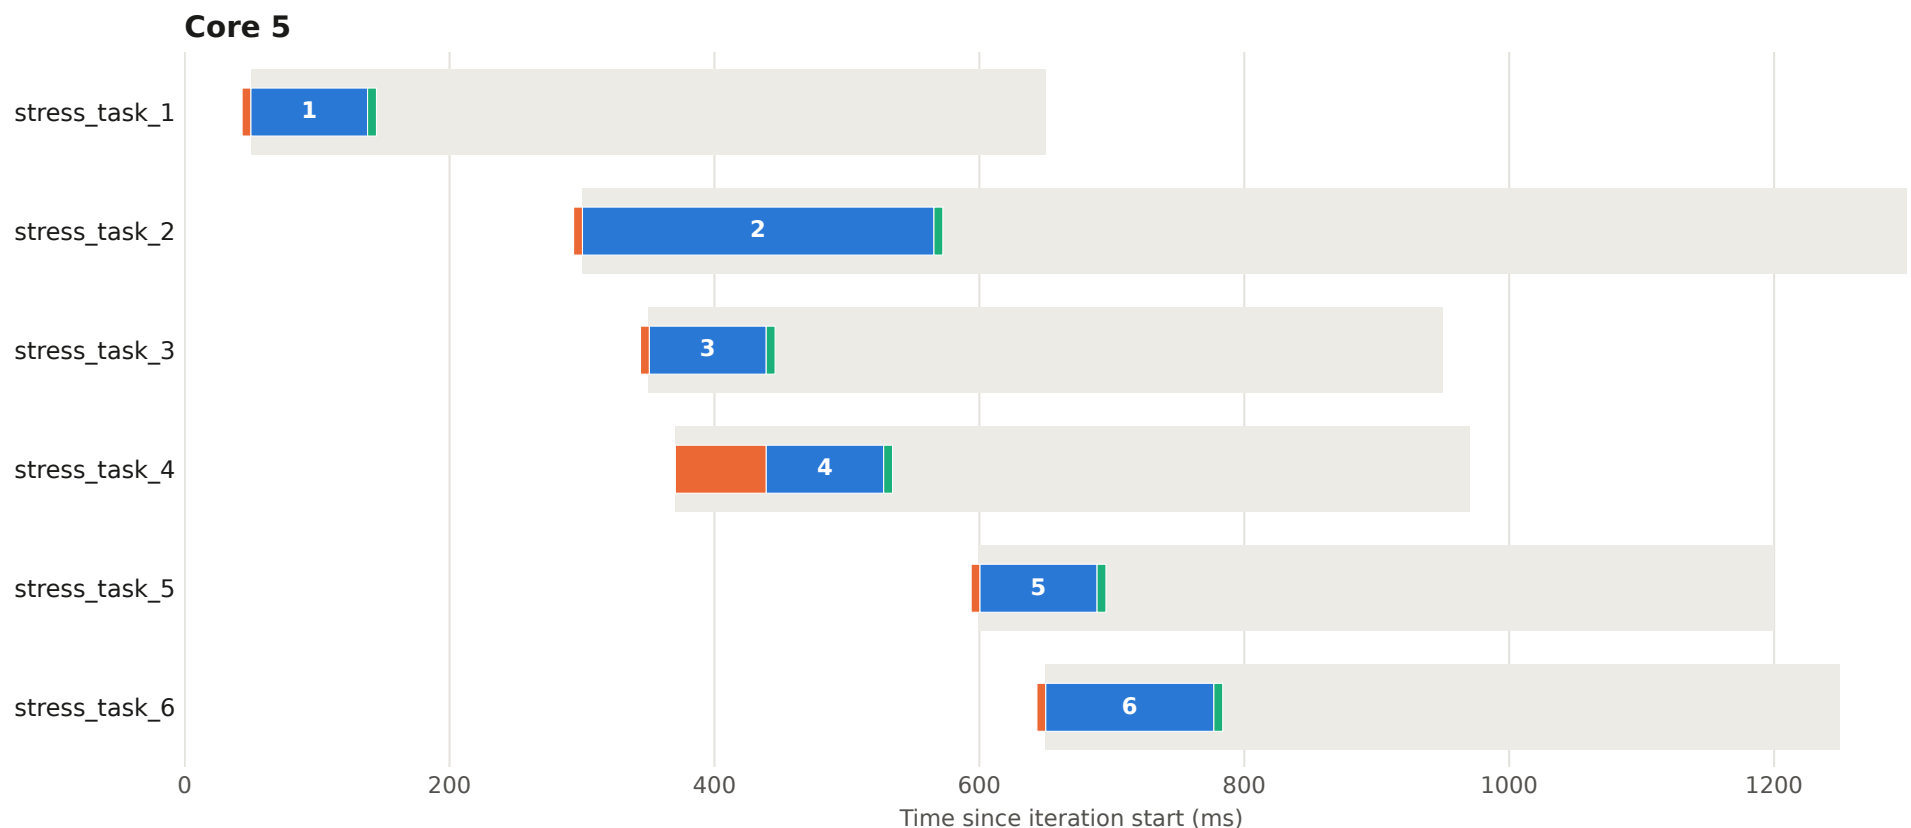


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 86 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

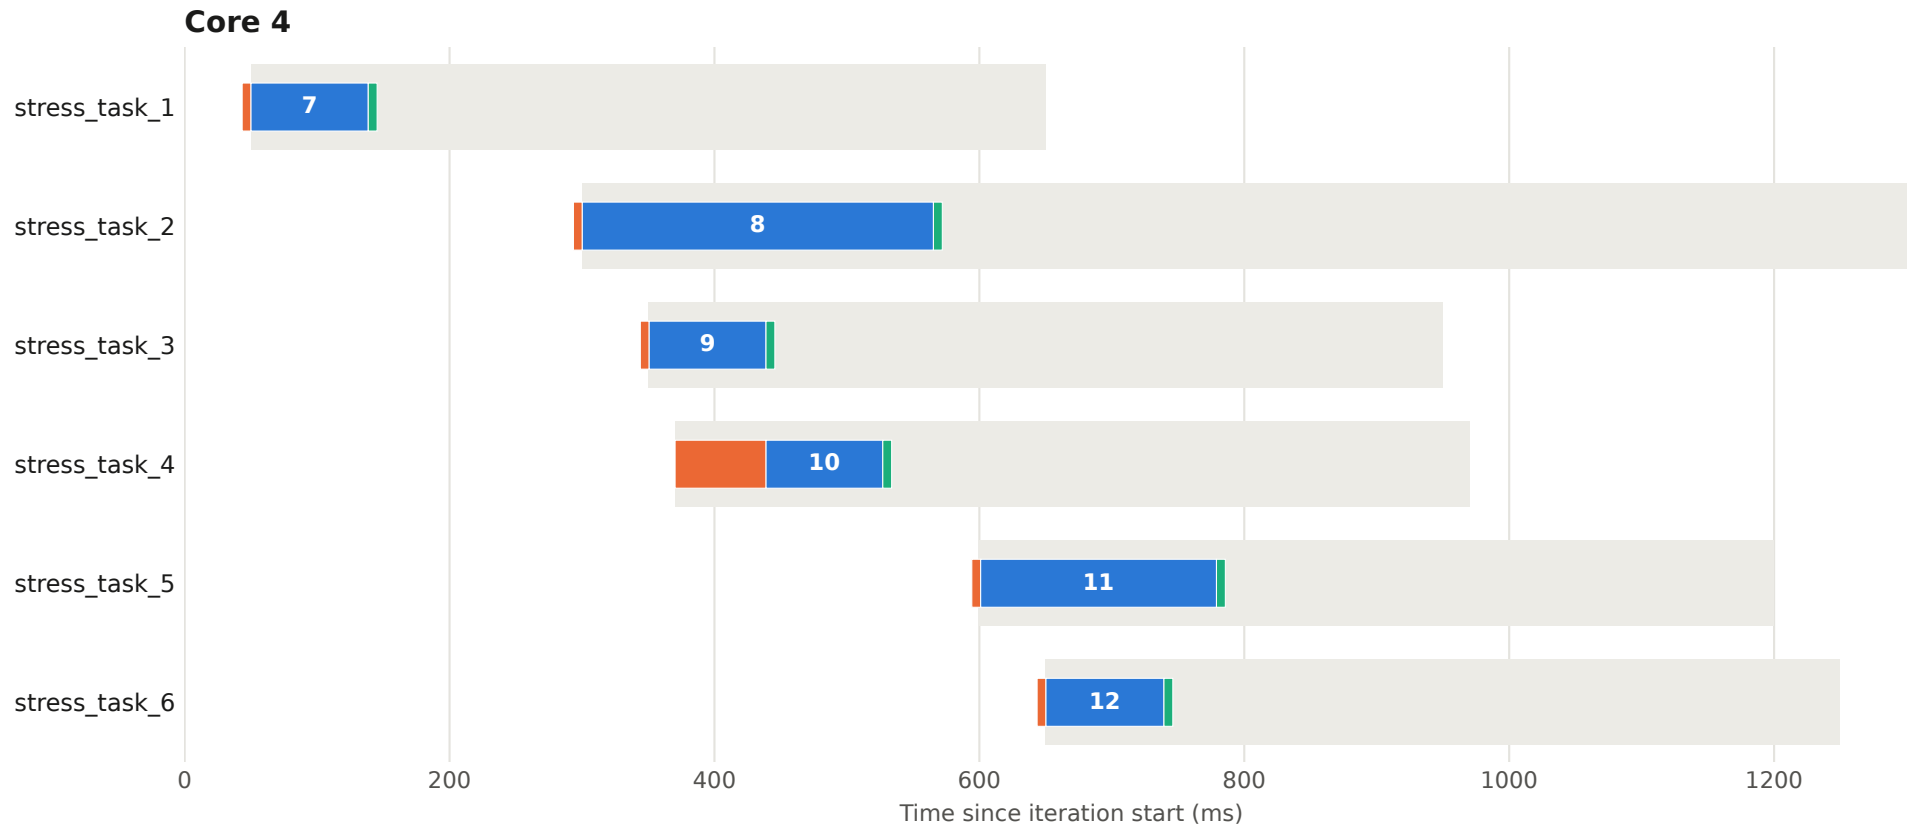


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 86 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

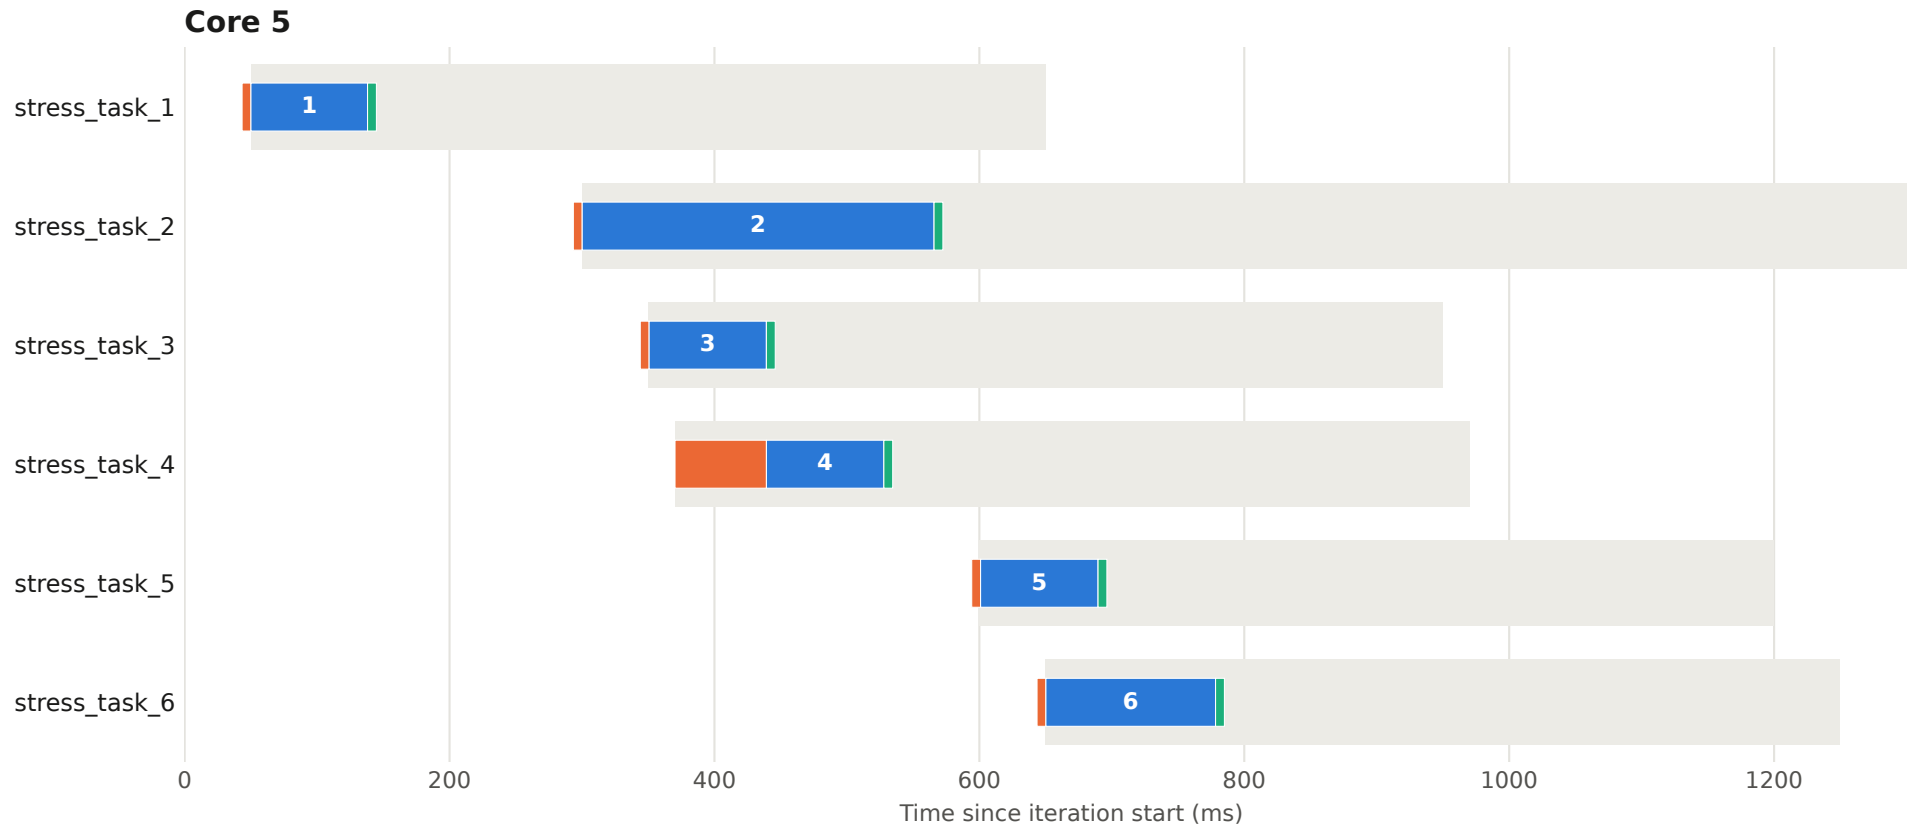


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 87 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

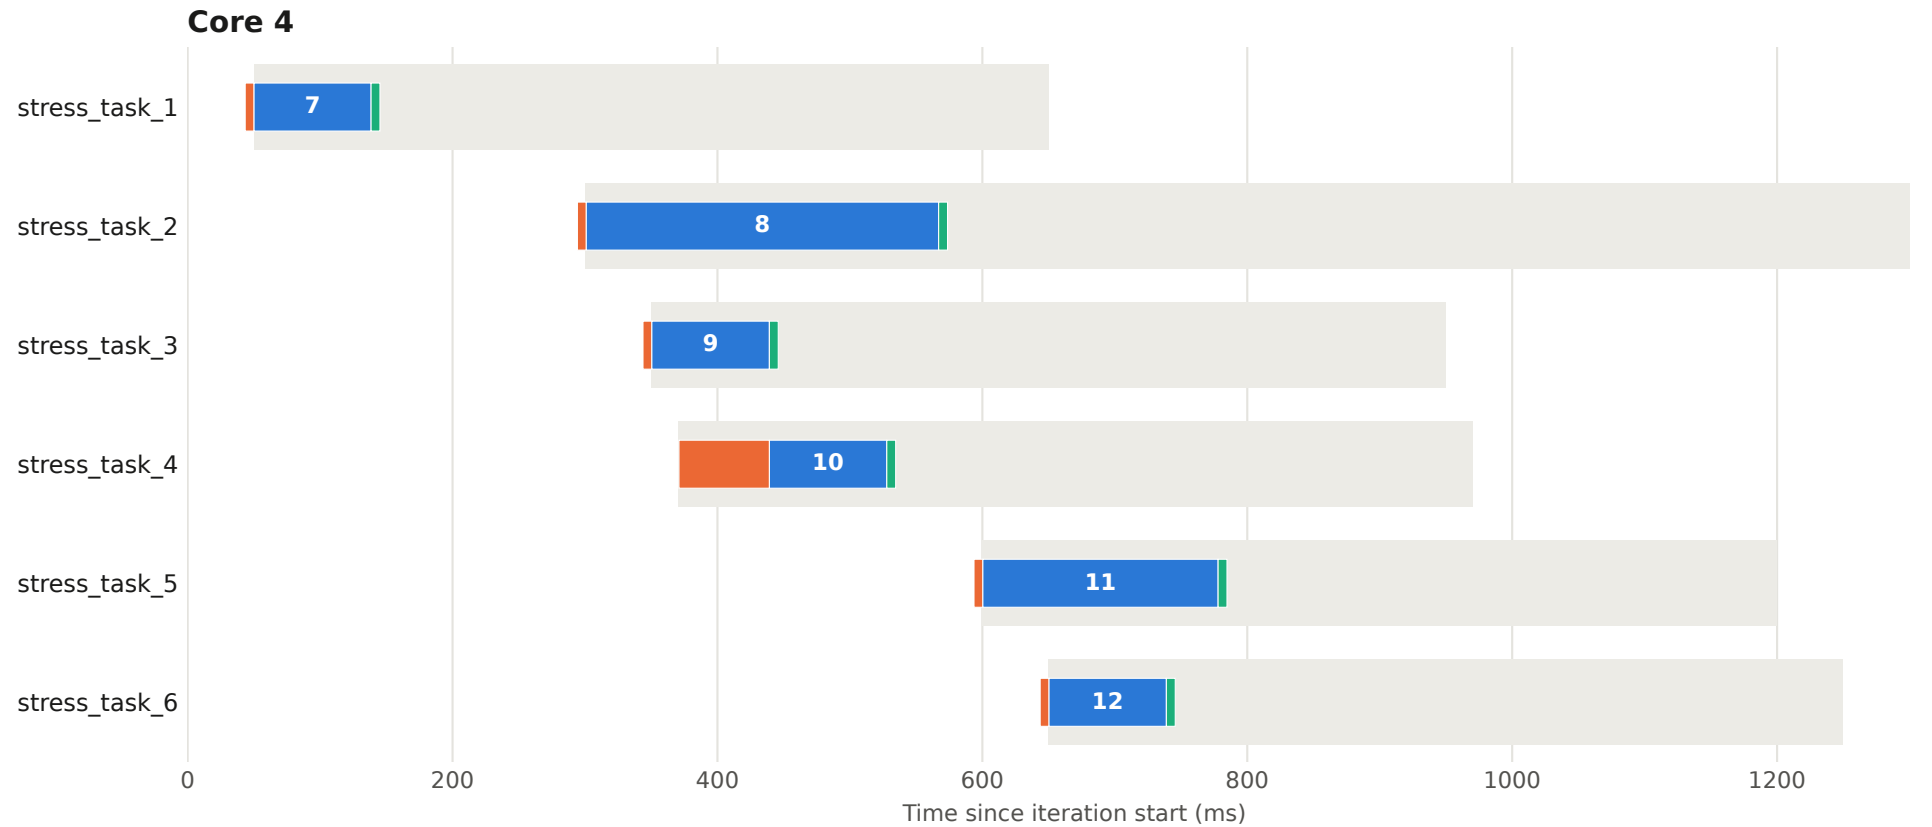


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 87 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

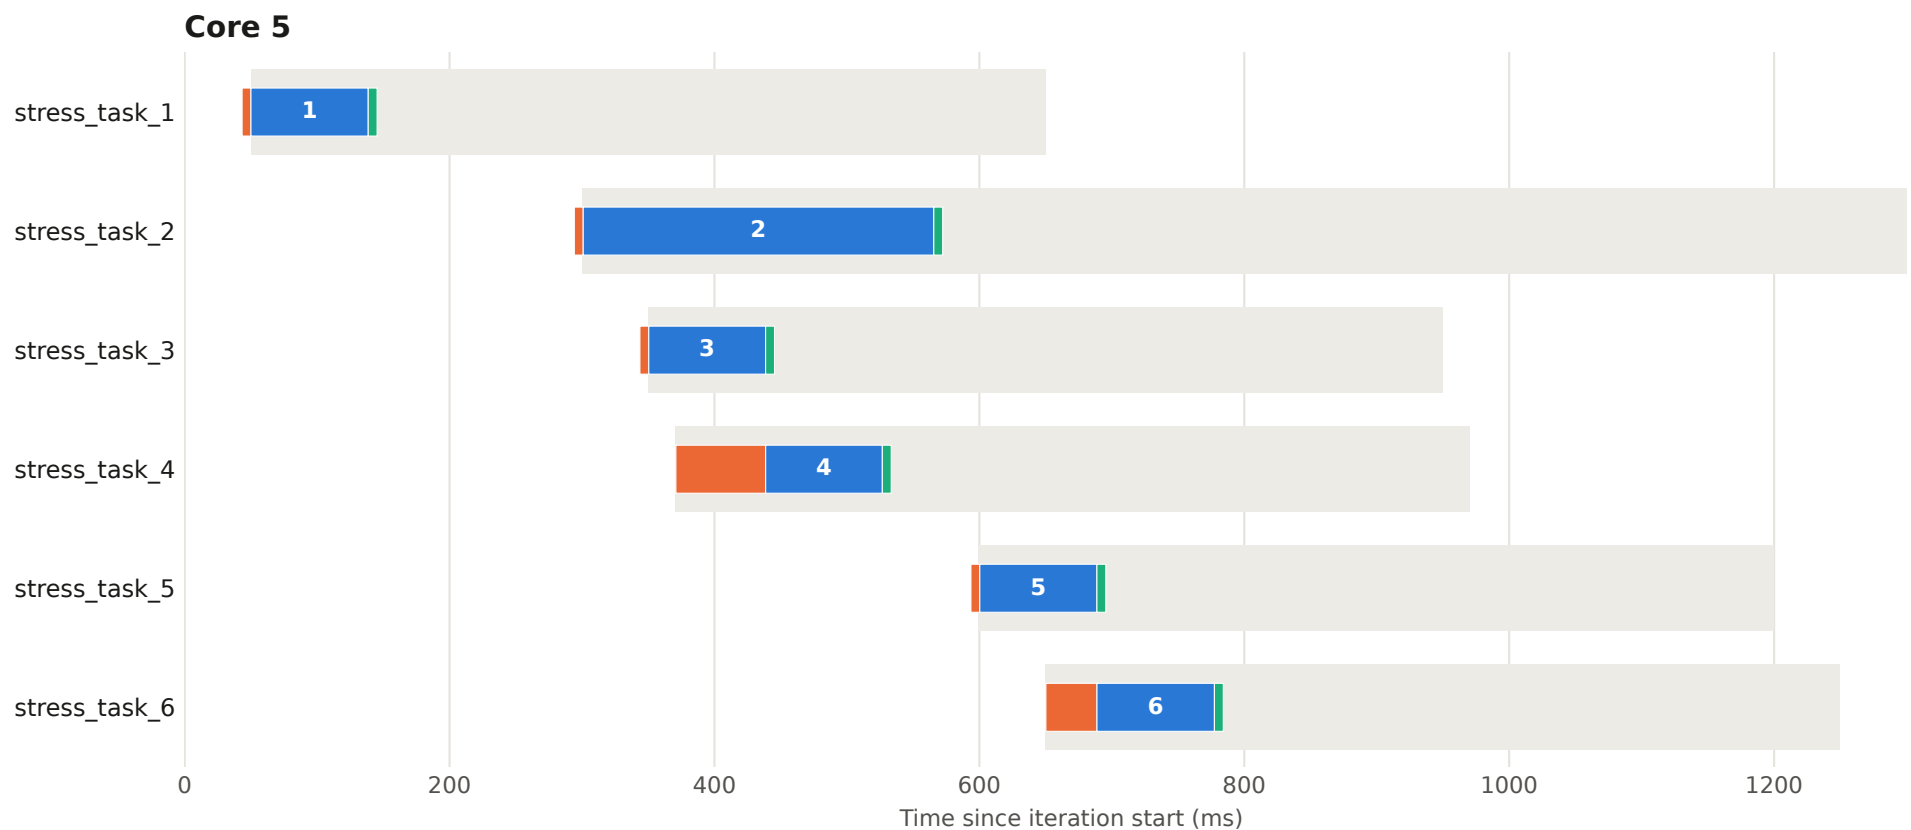


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 88 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

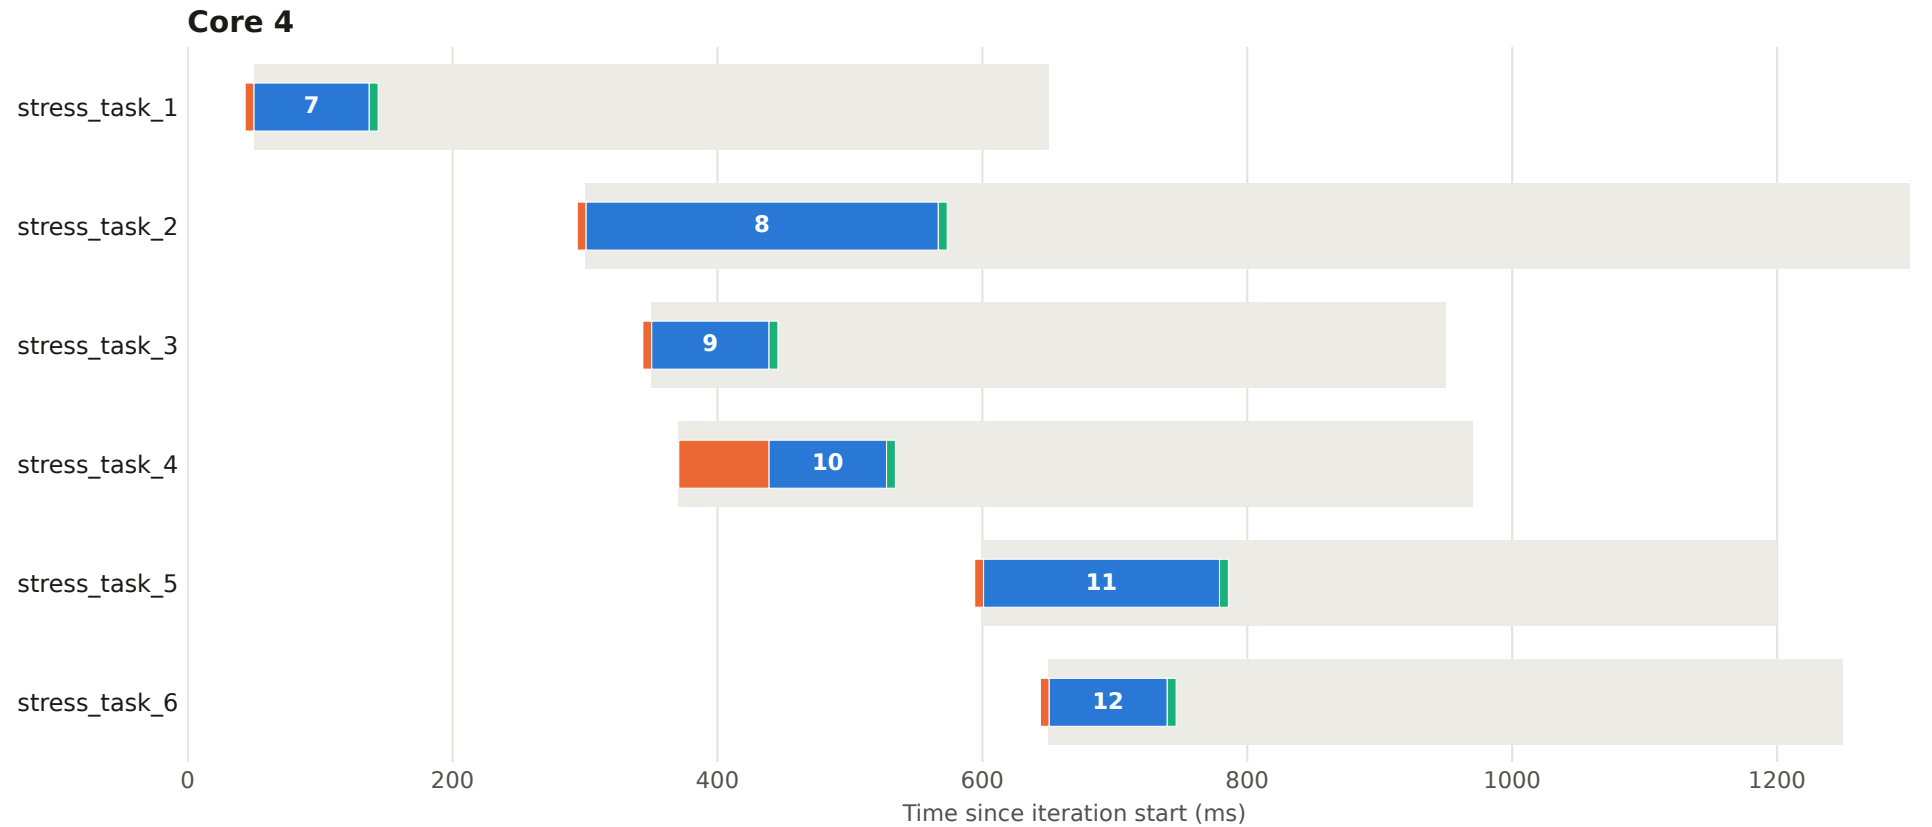


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 88 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

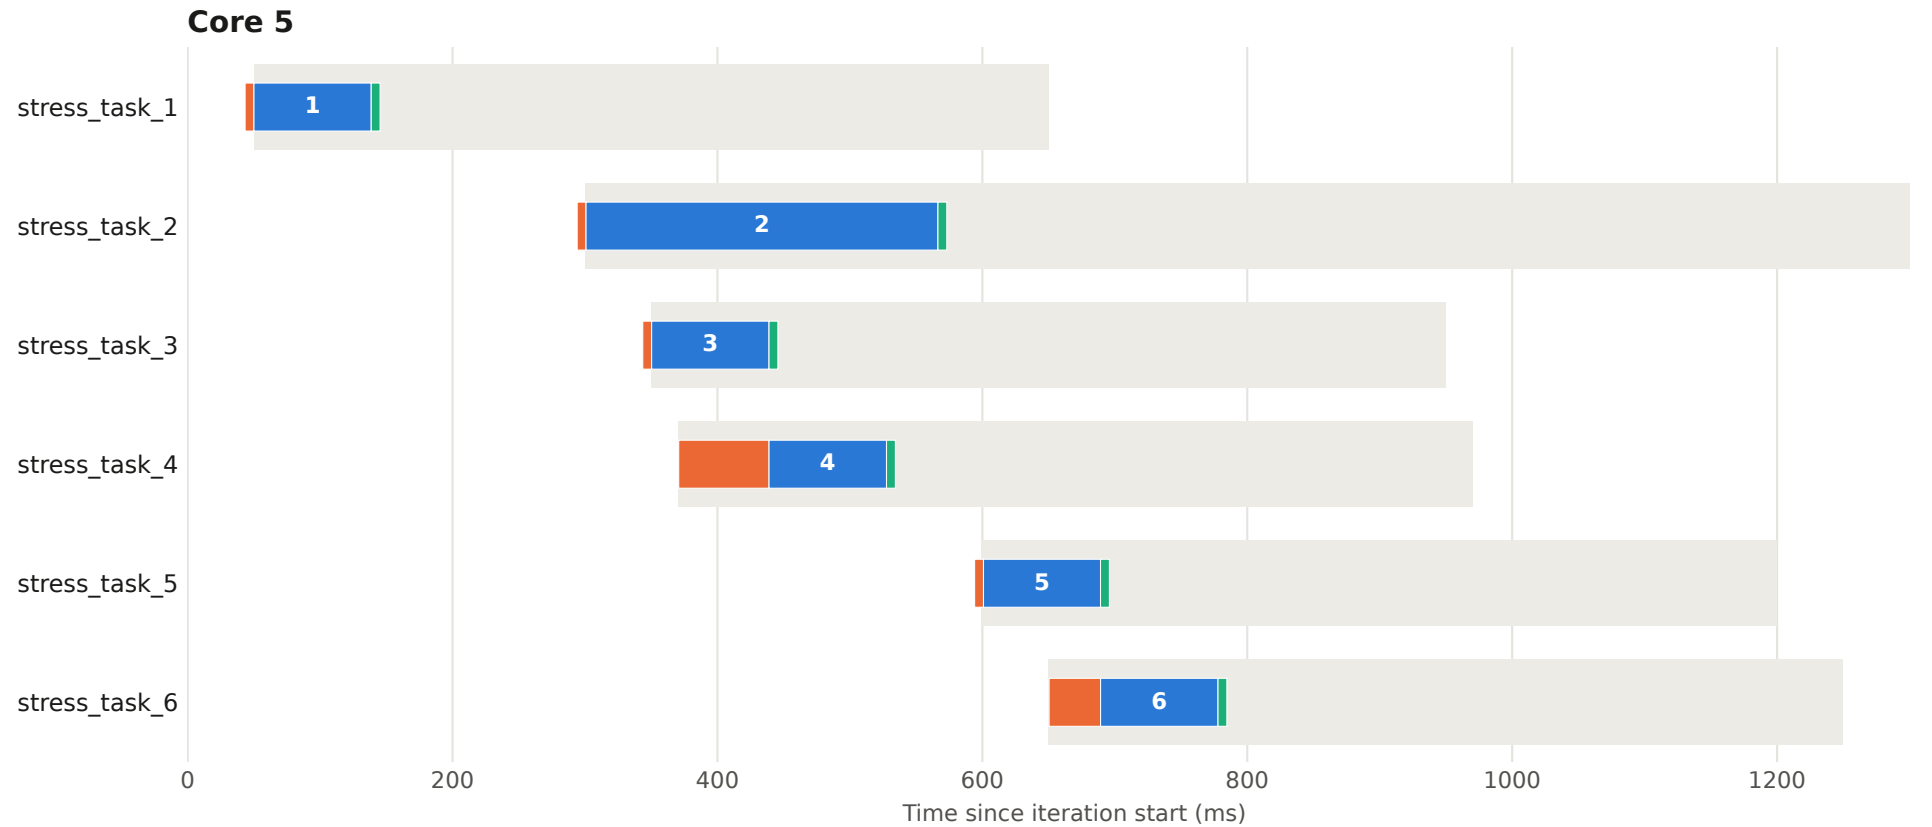


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 89 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

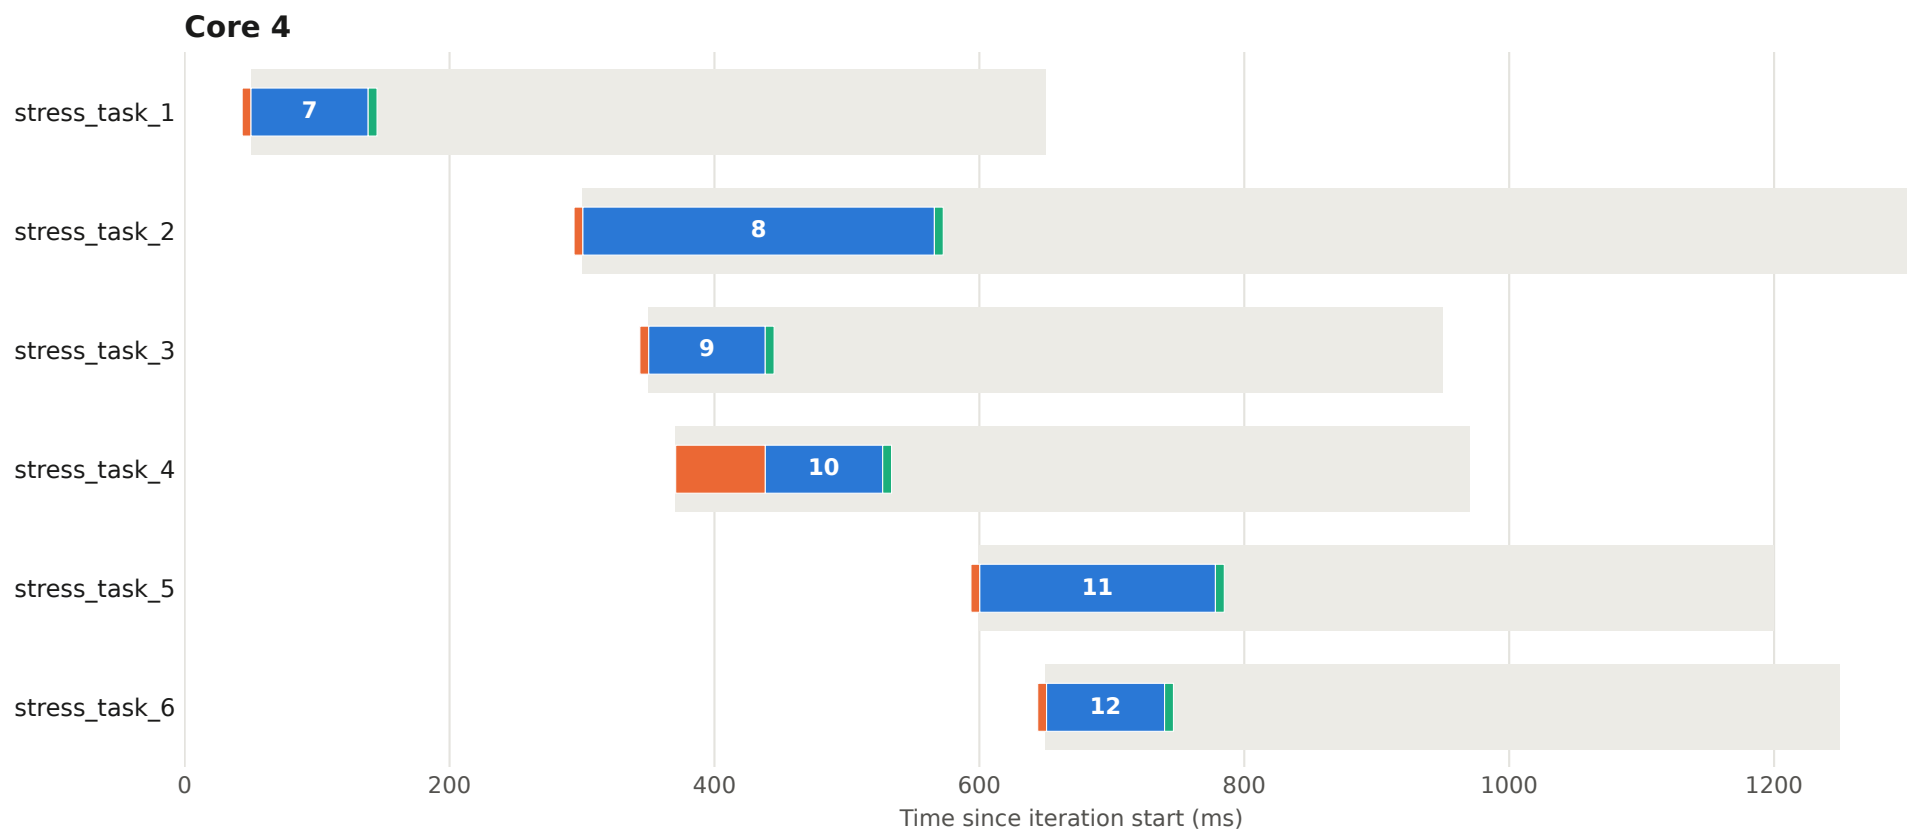


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 89 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

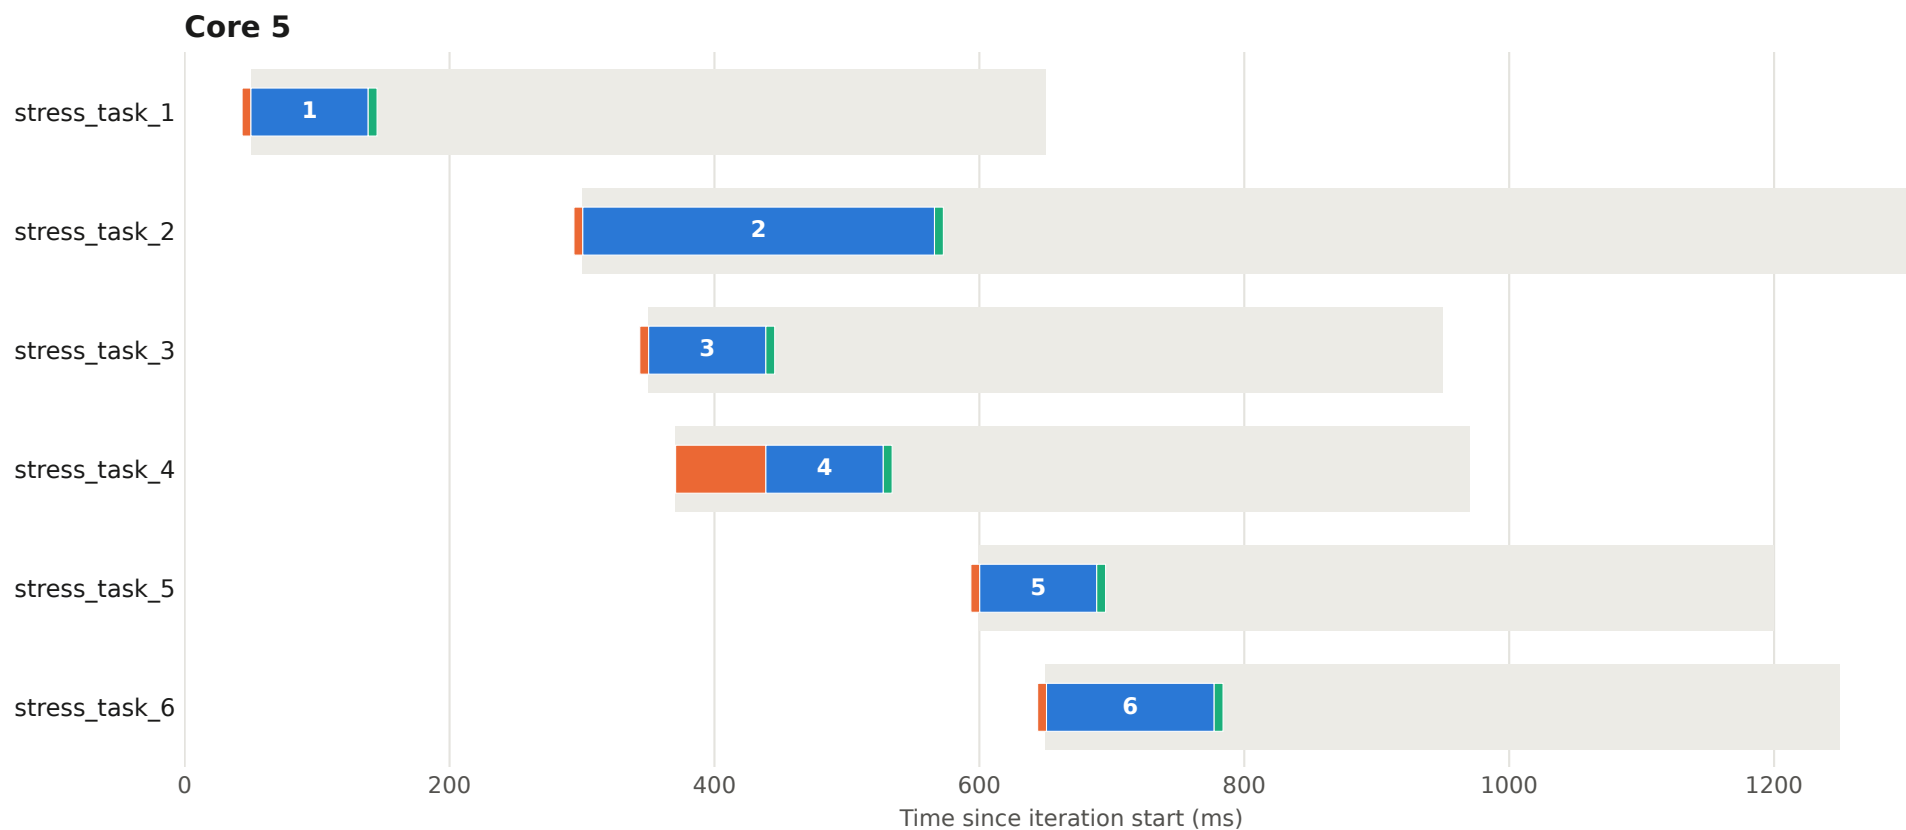


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 90 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

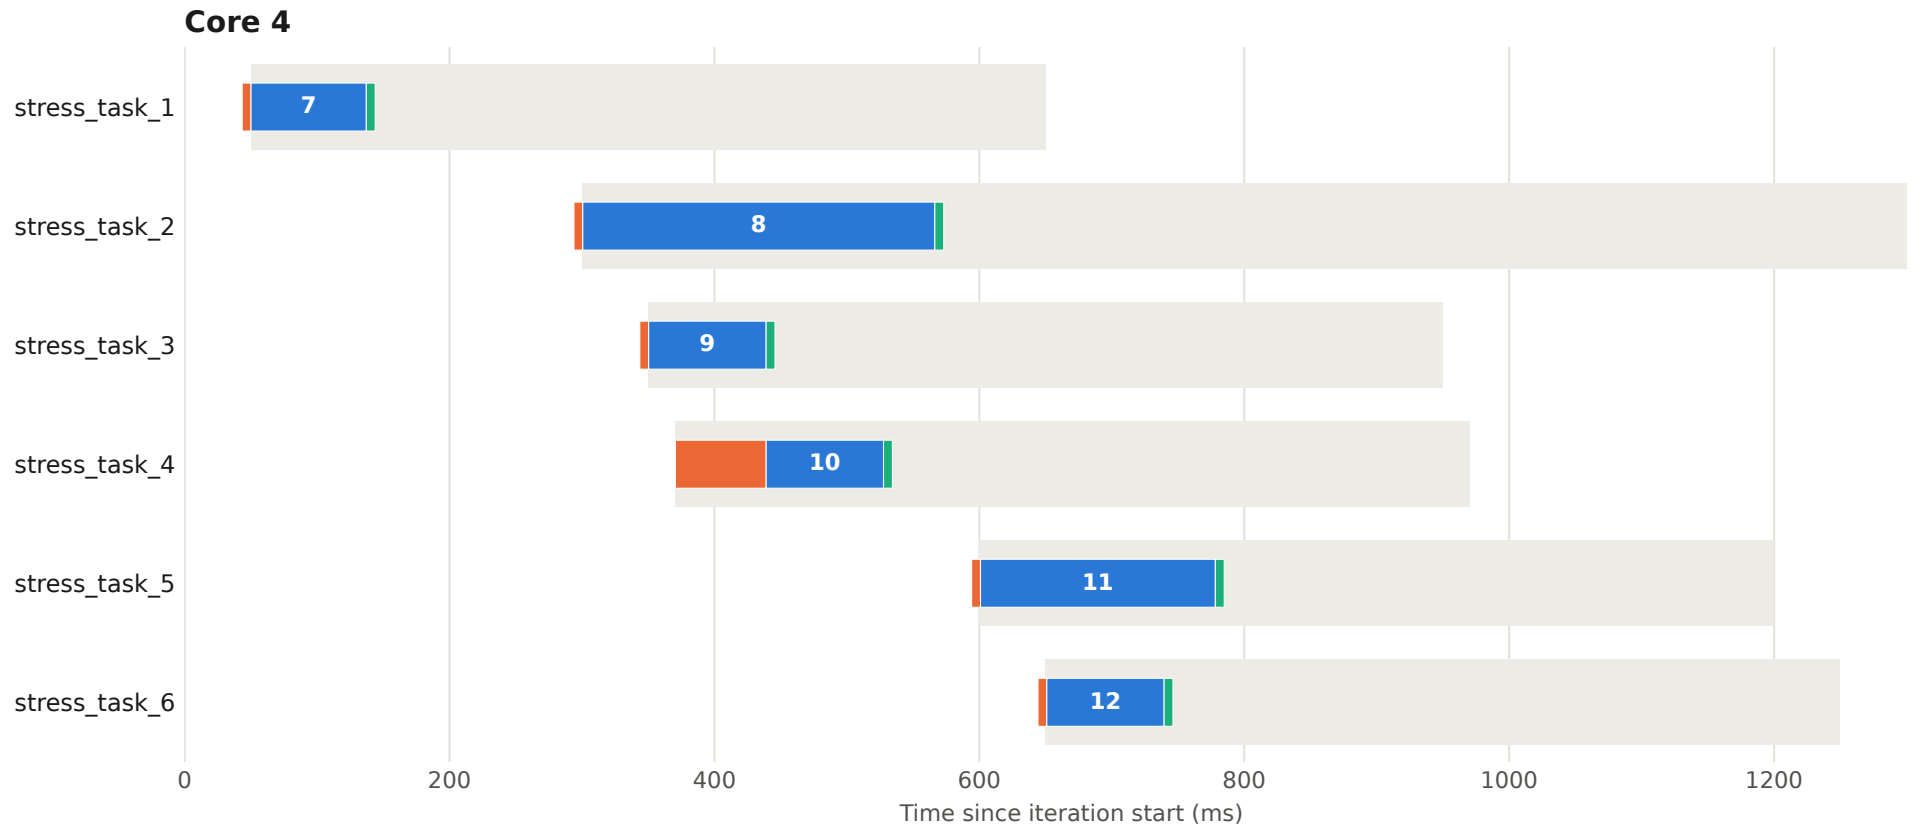


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 90 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

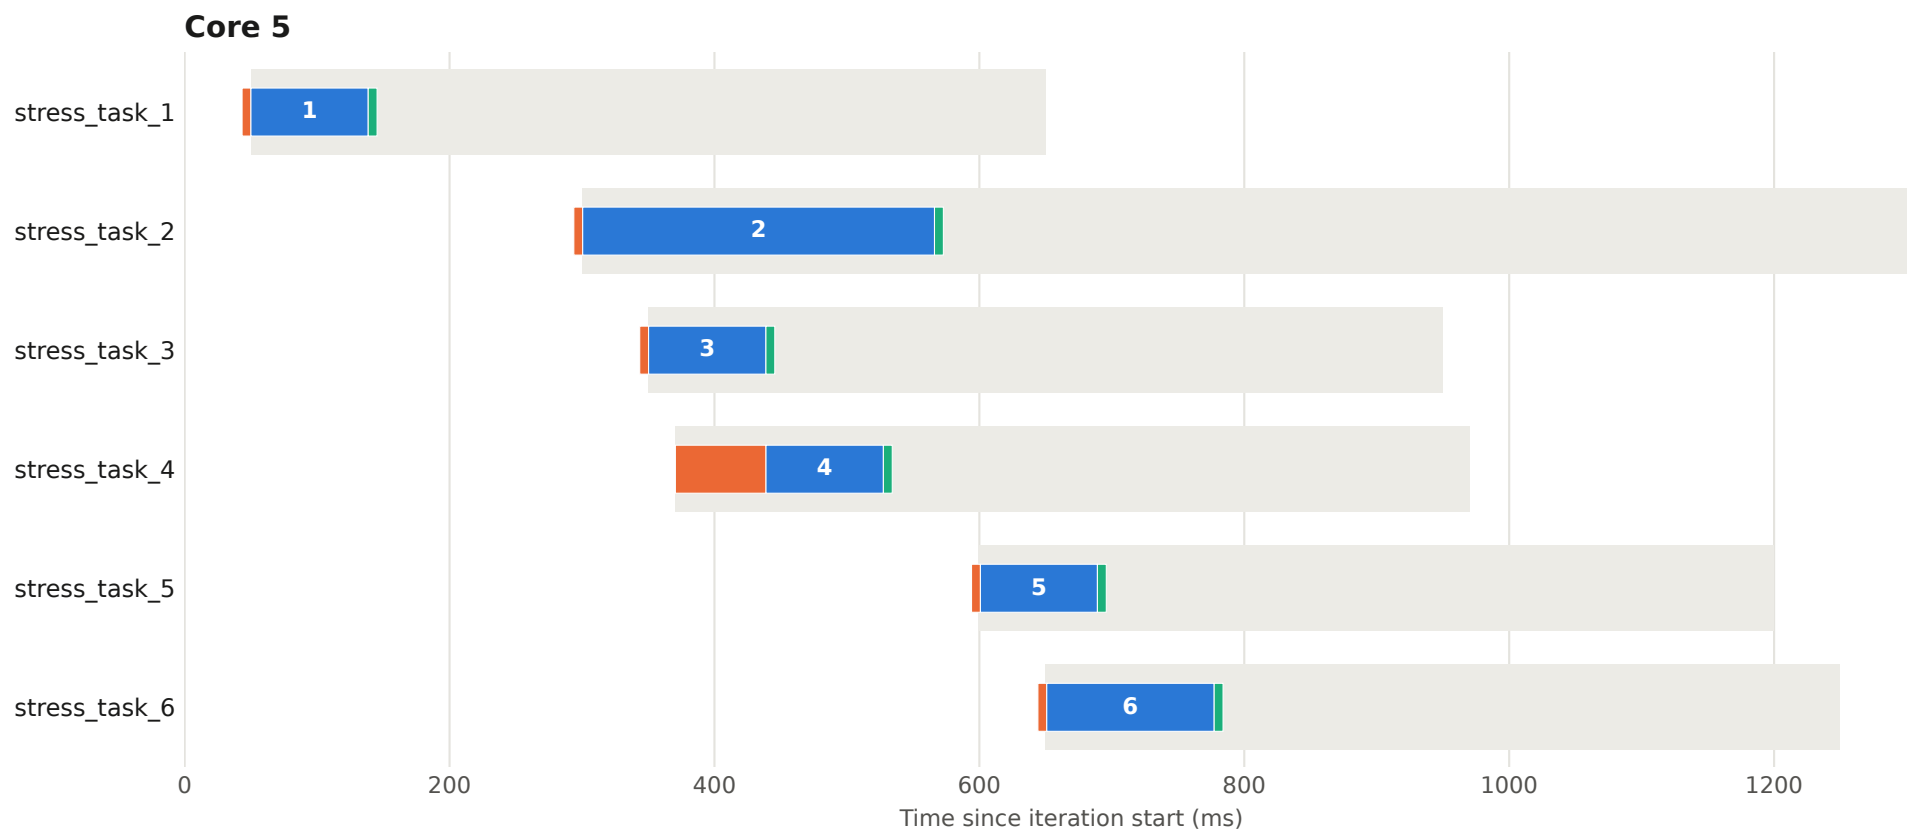


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 91 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

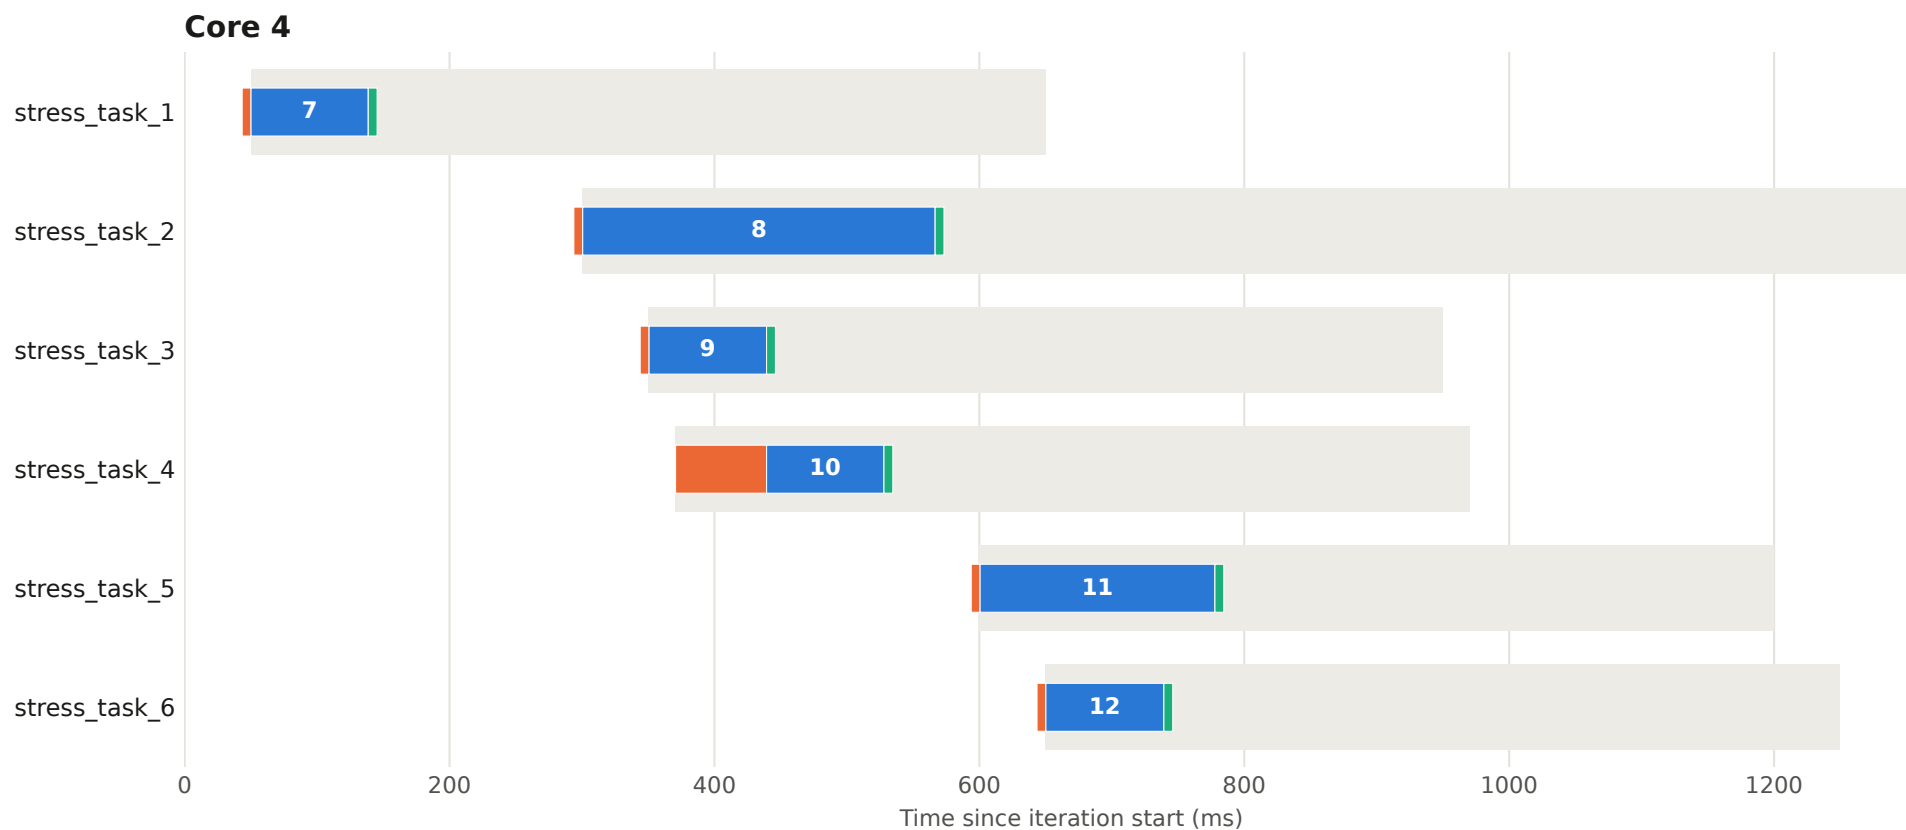


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 91 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

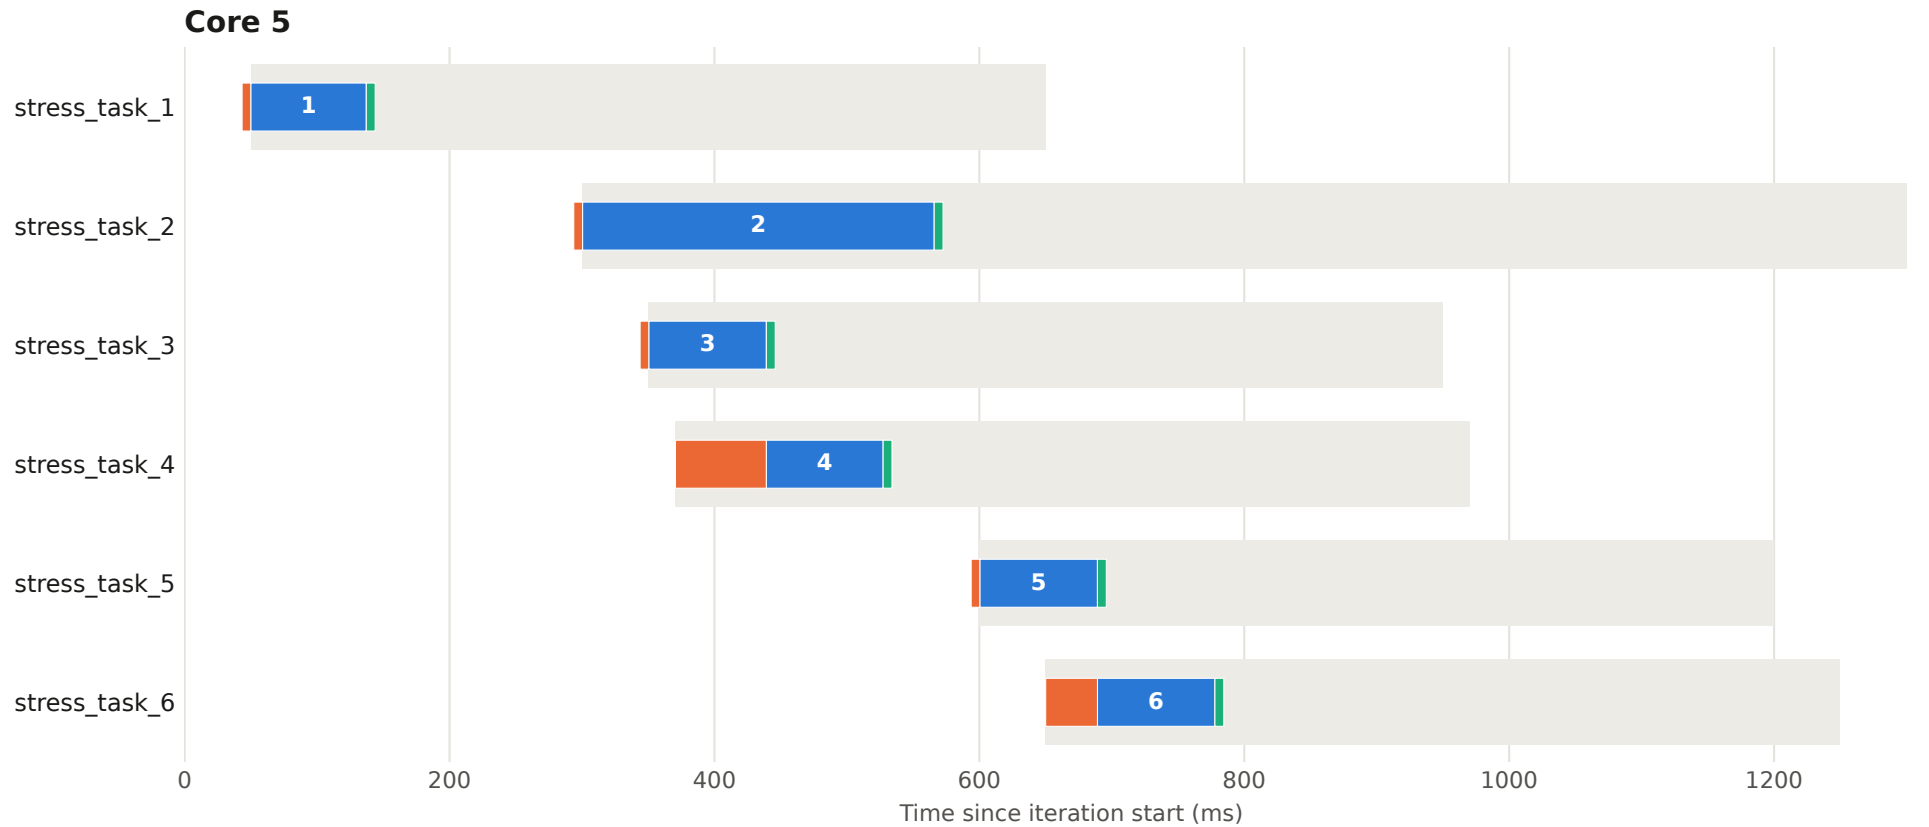


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 92 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

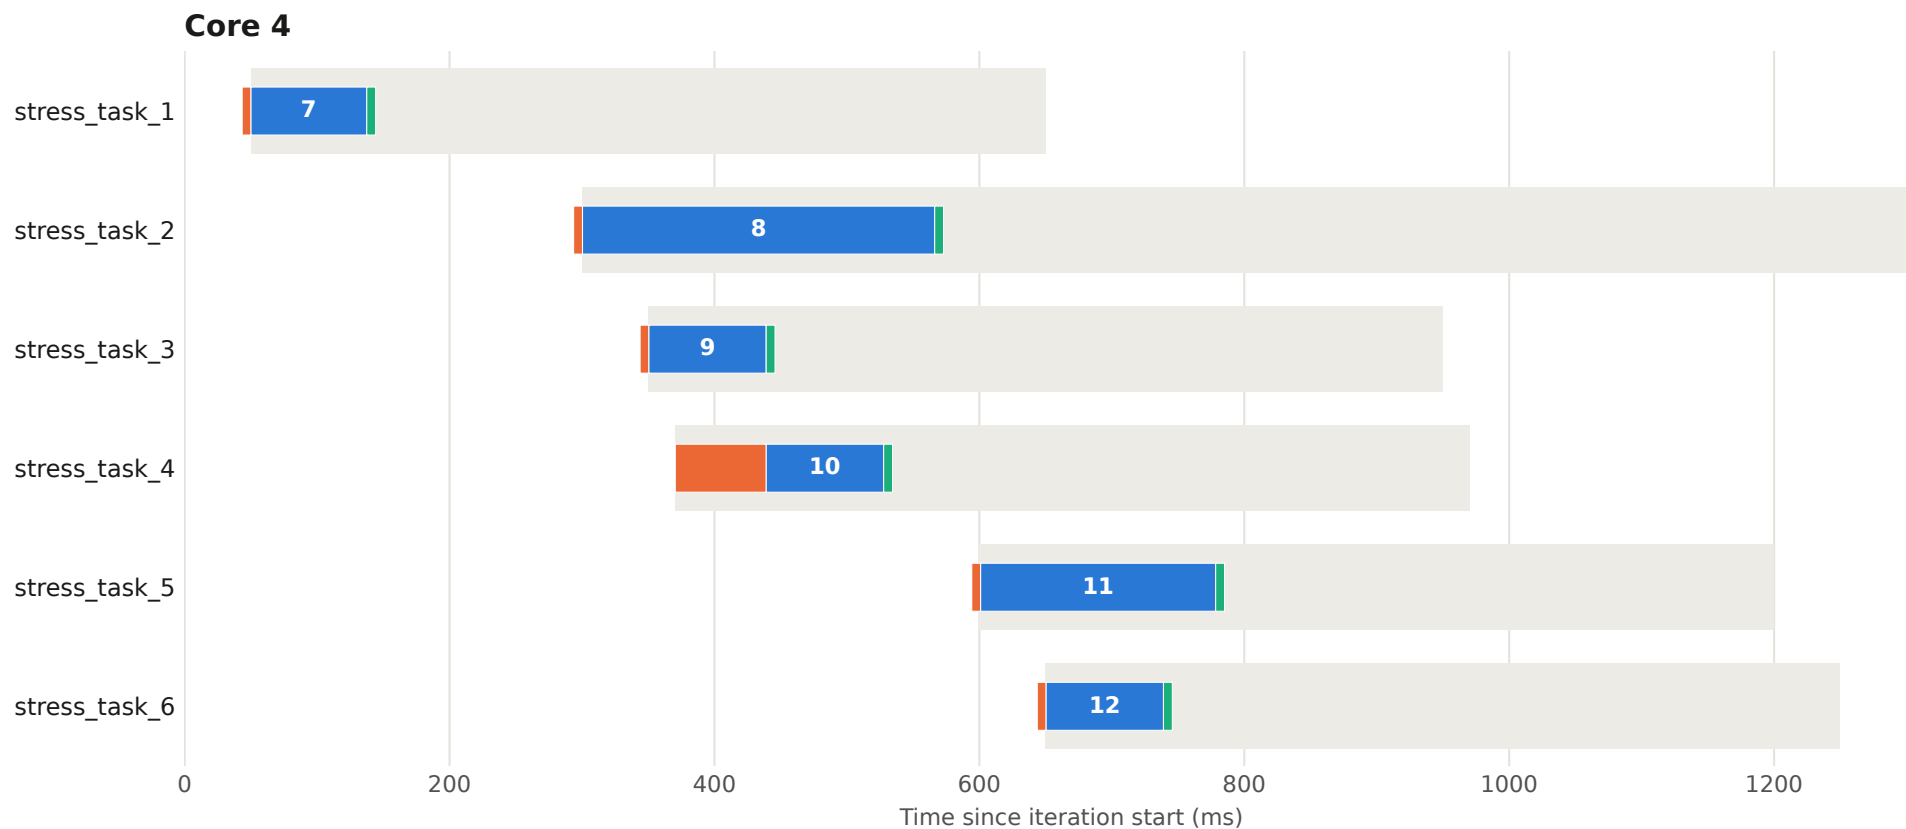


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 92 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

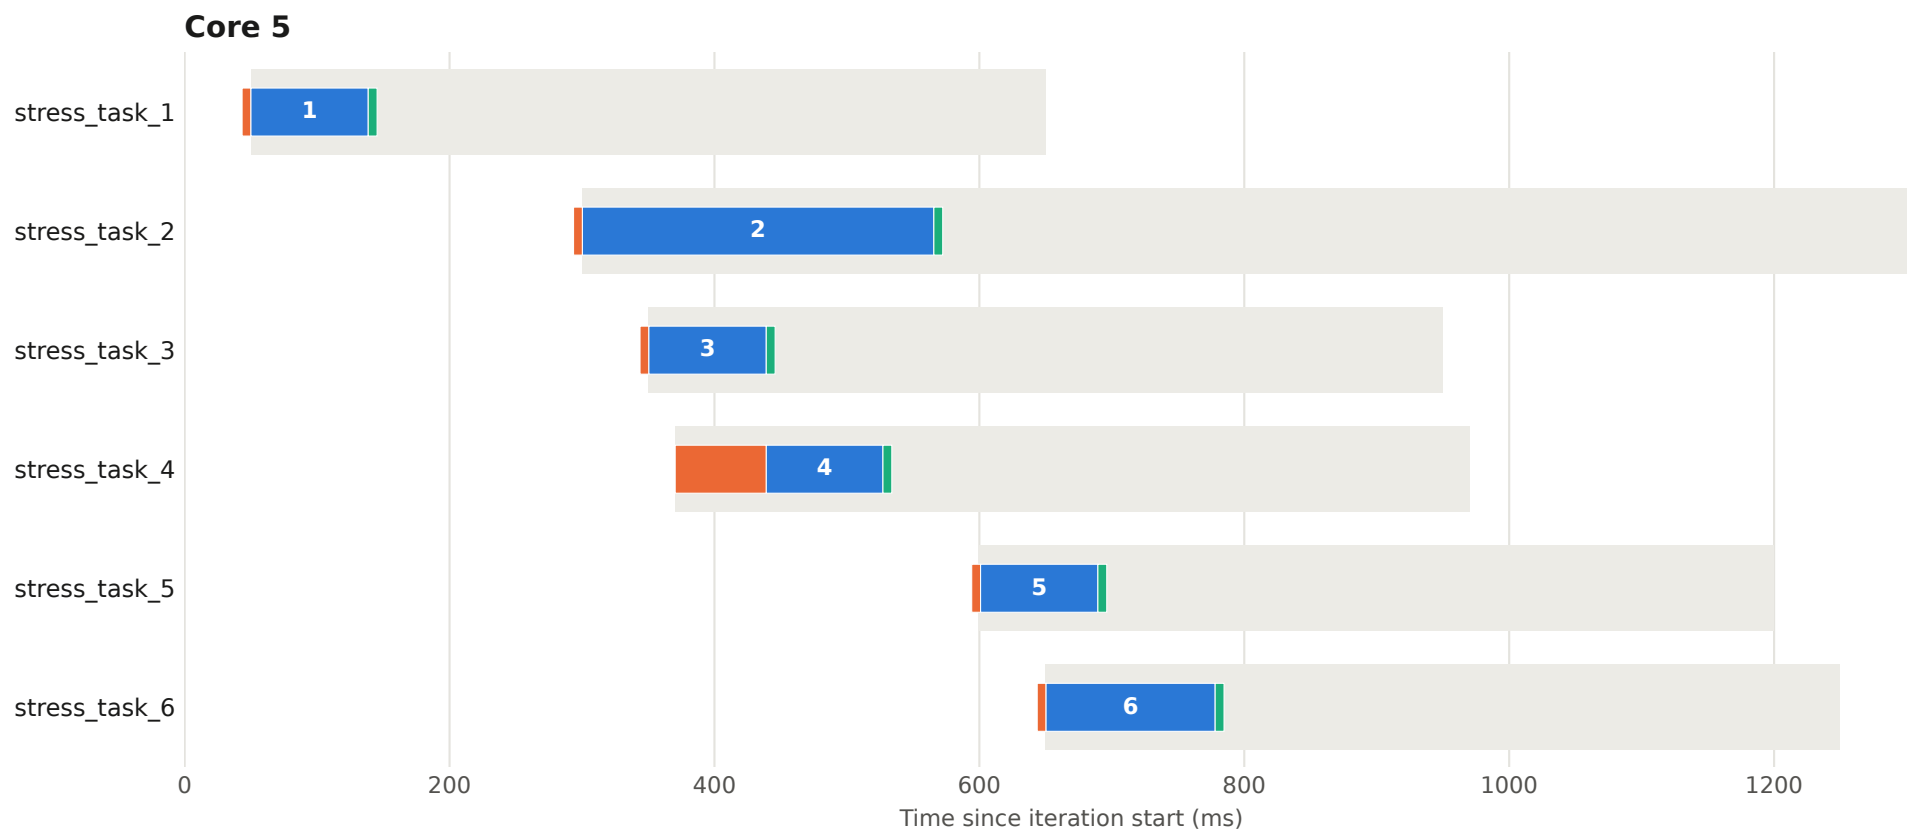


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 93 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

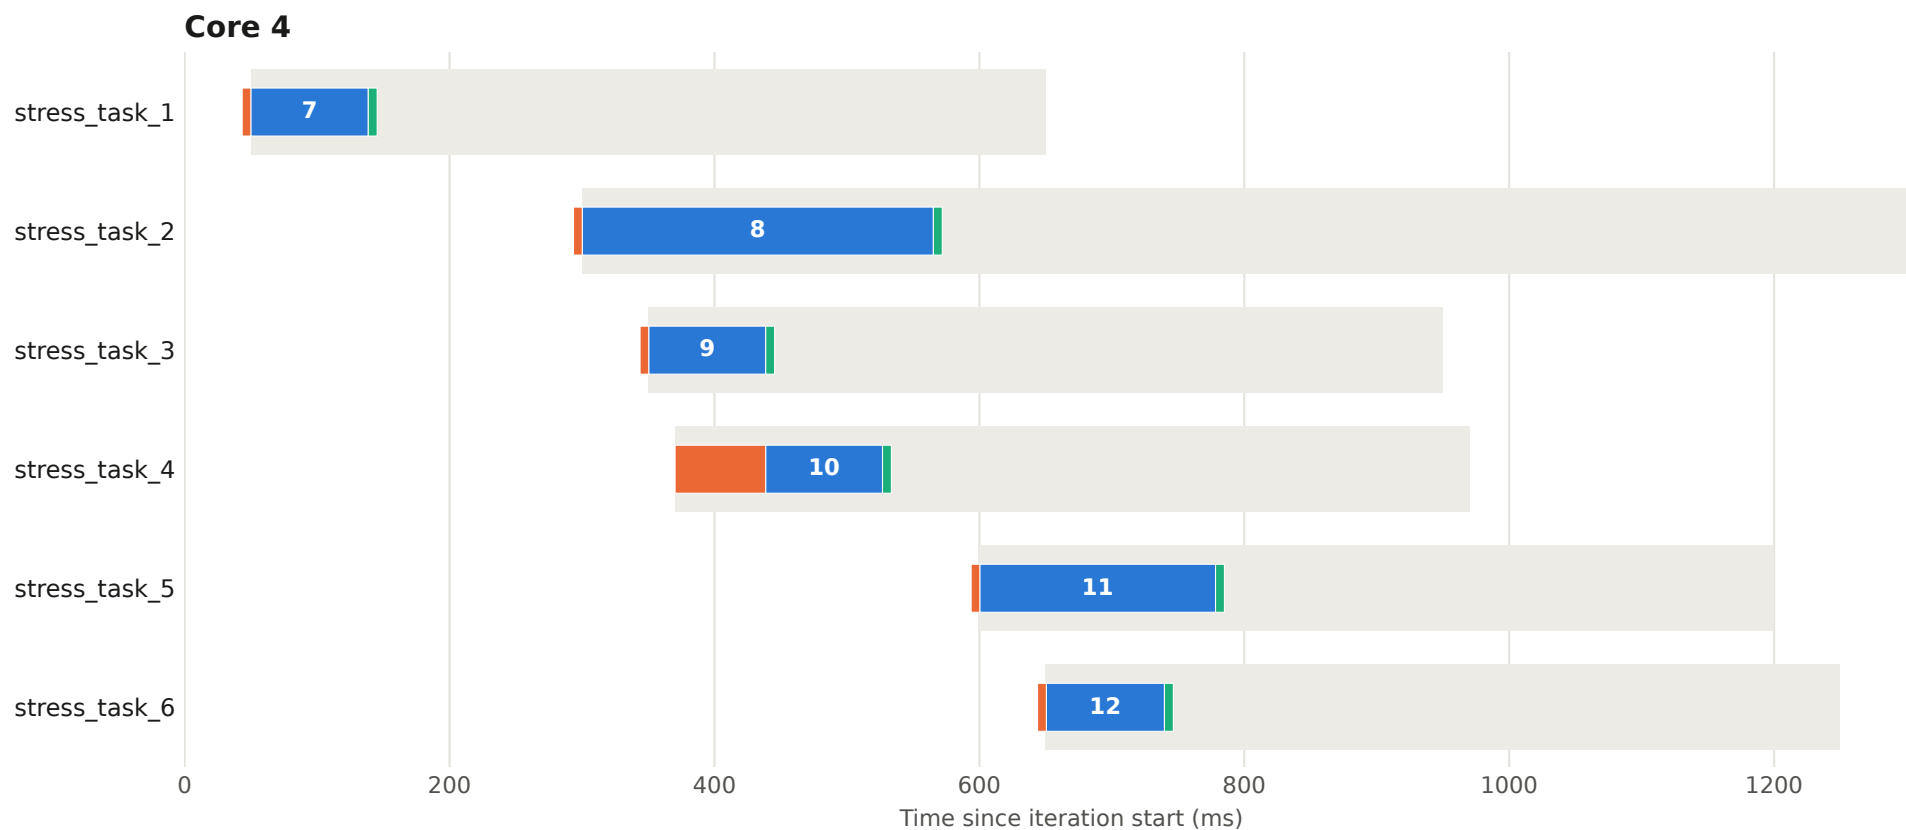


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 93 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

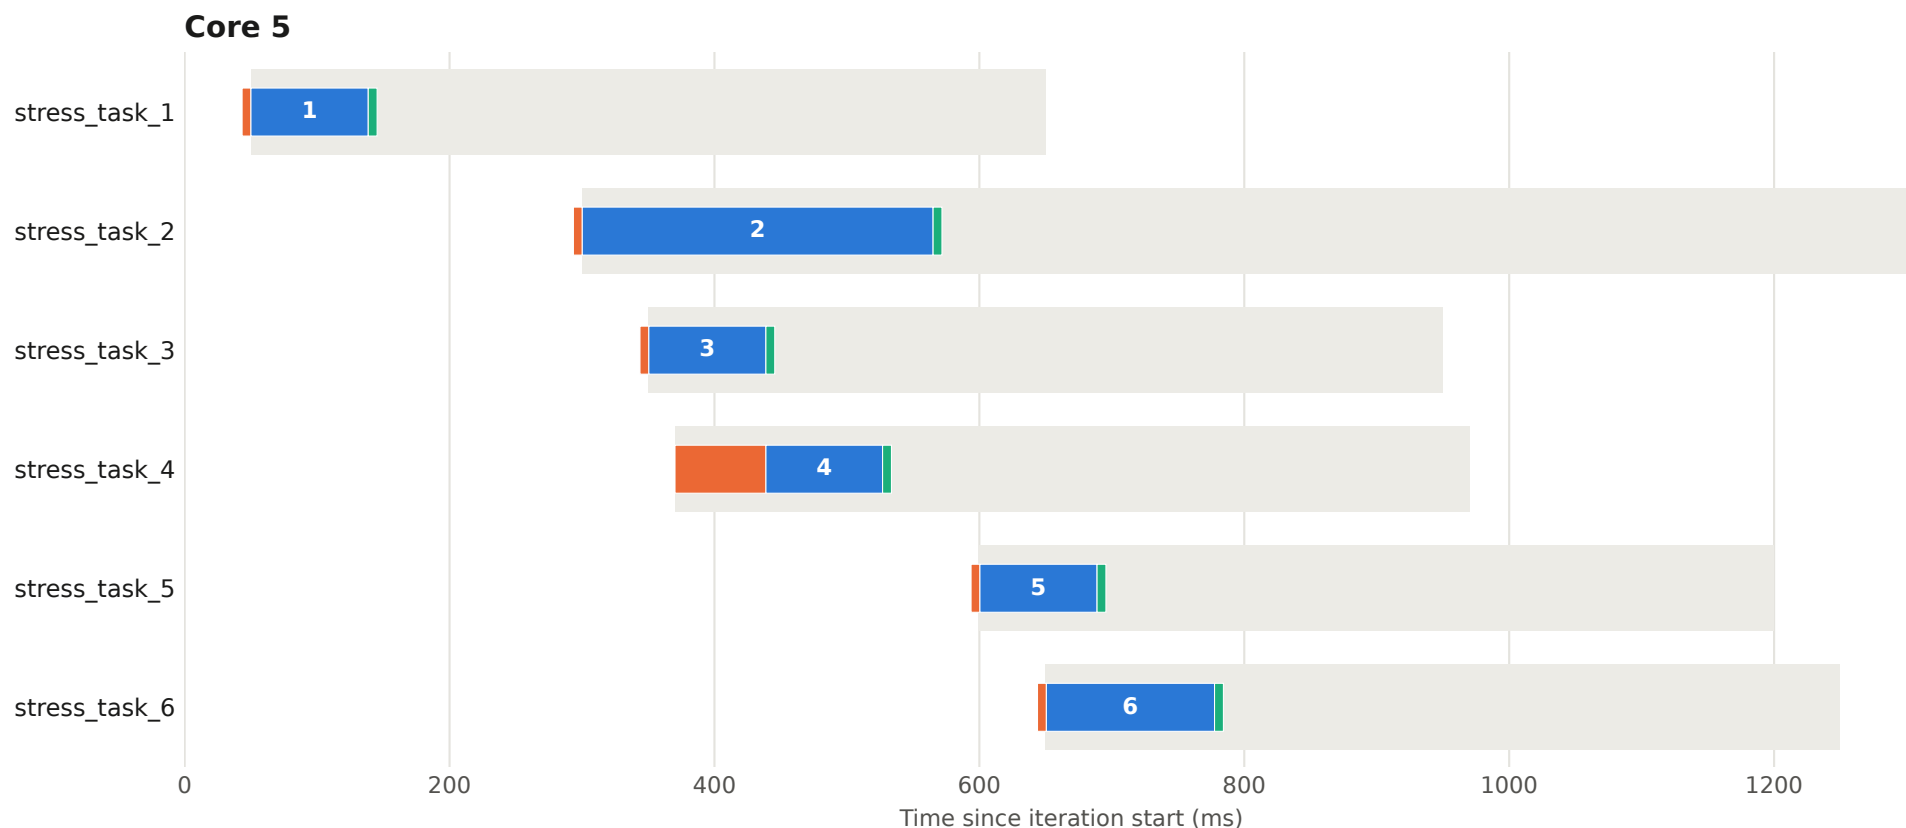


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 94 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

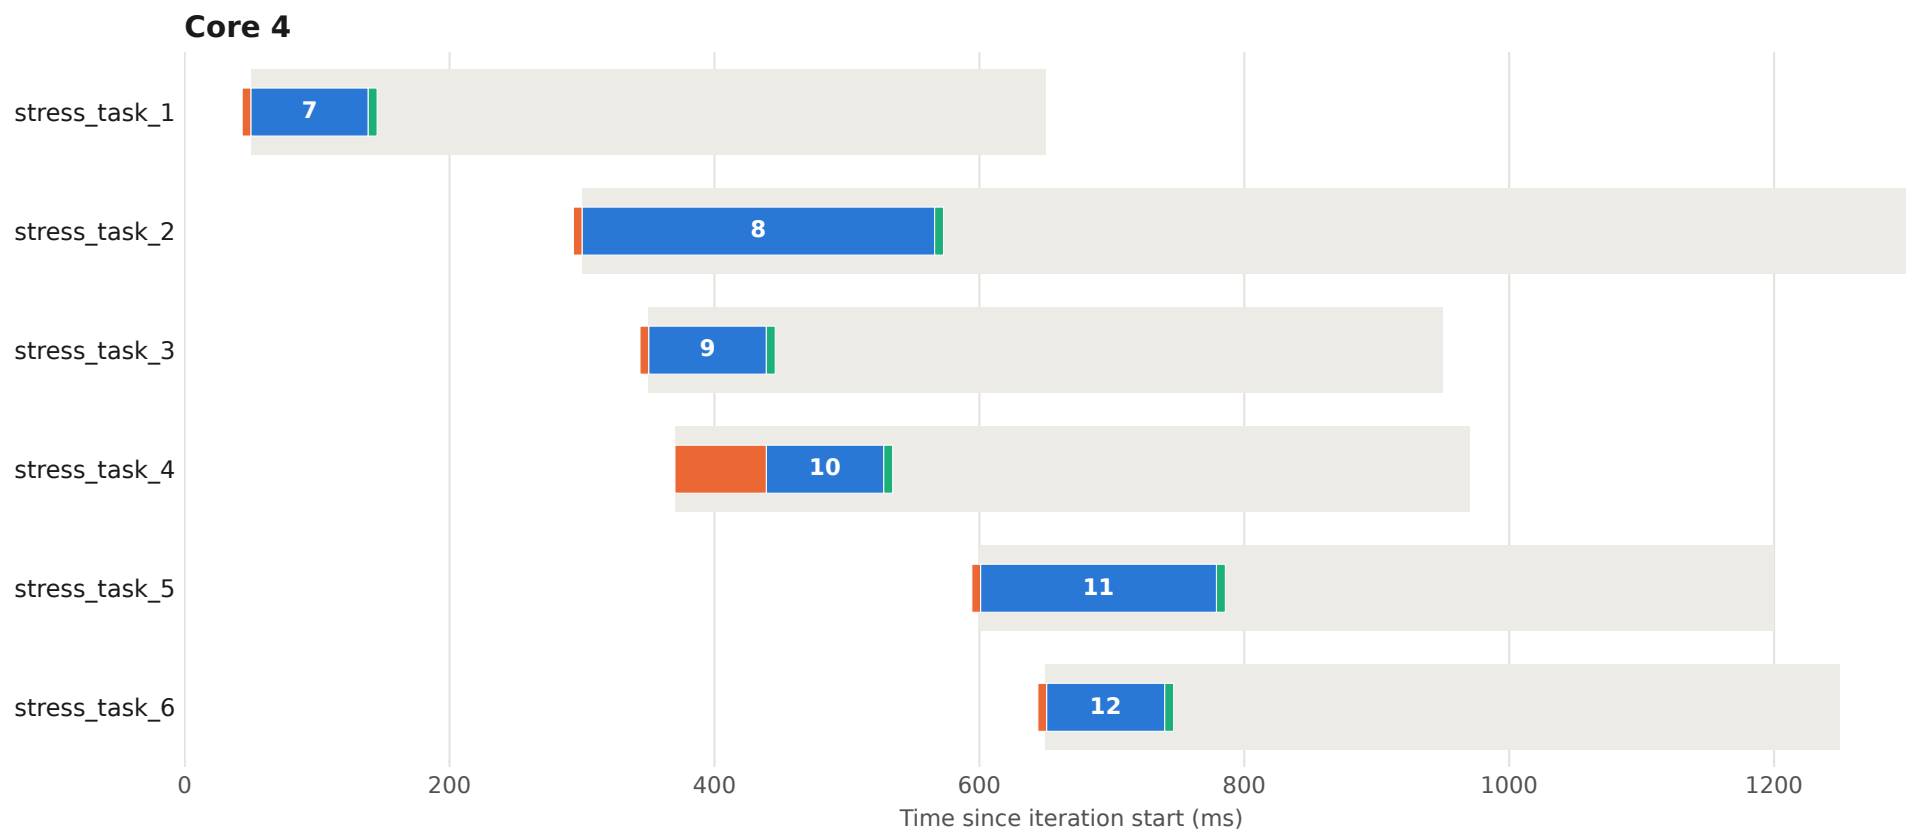


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 94 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

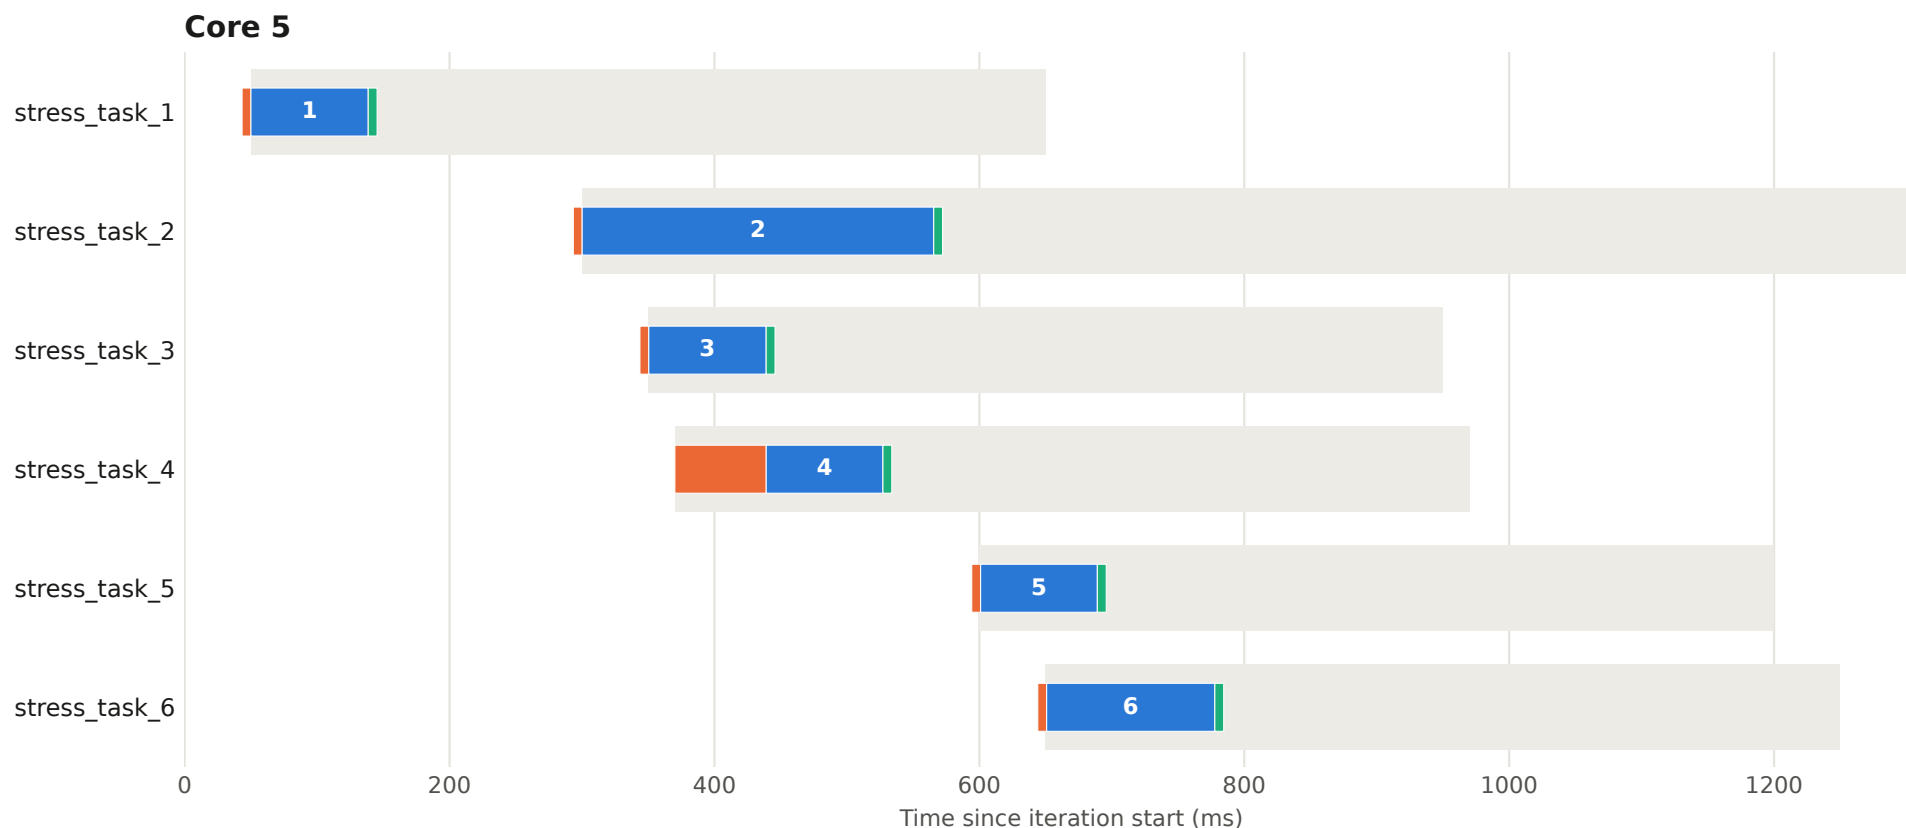


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 95 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

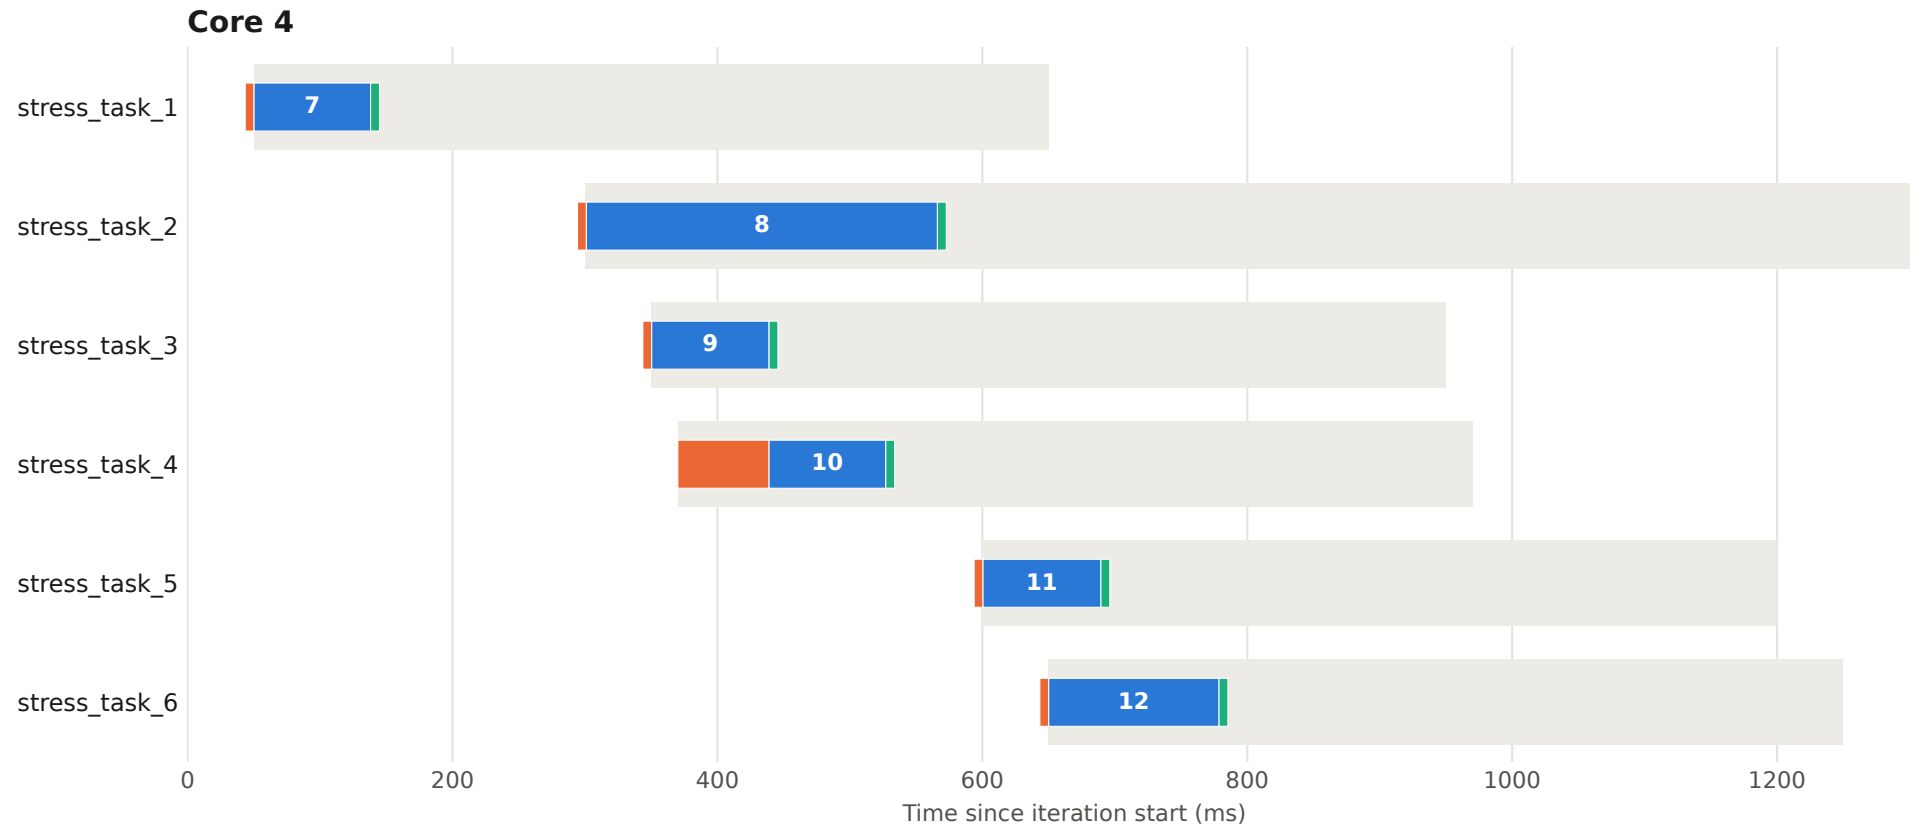


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 95 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

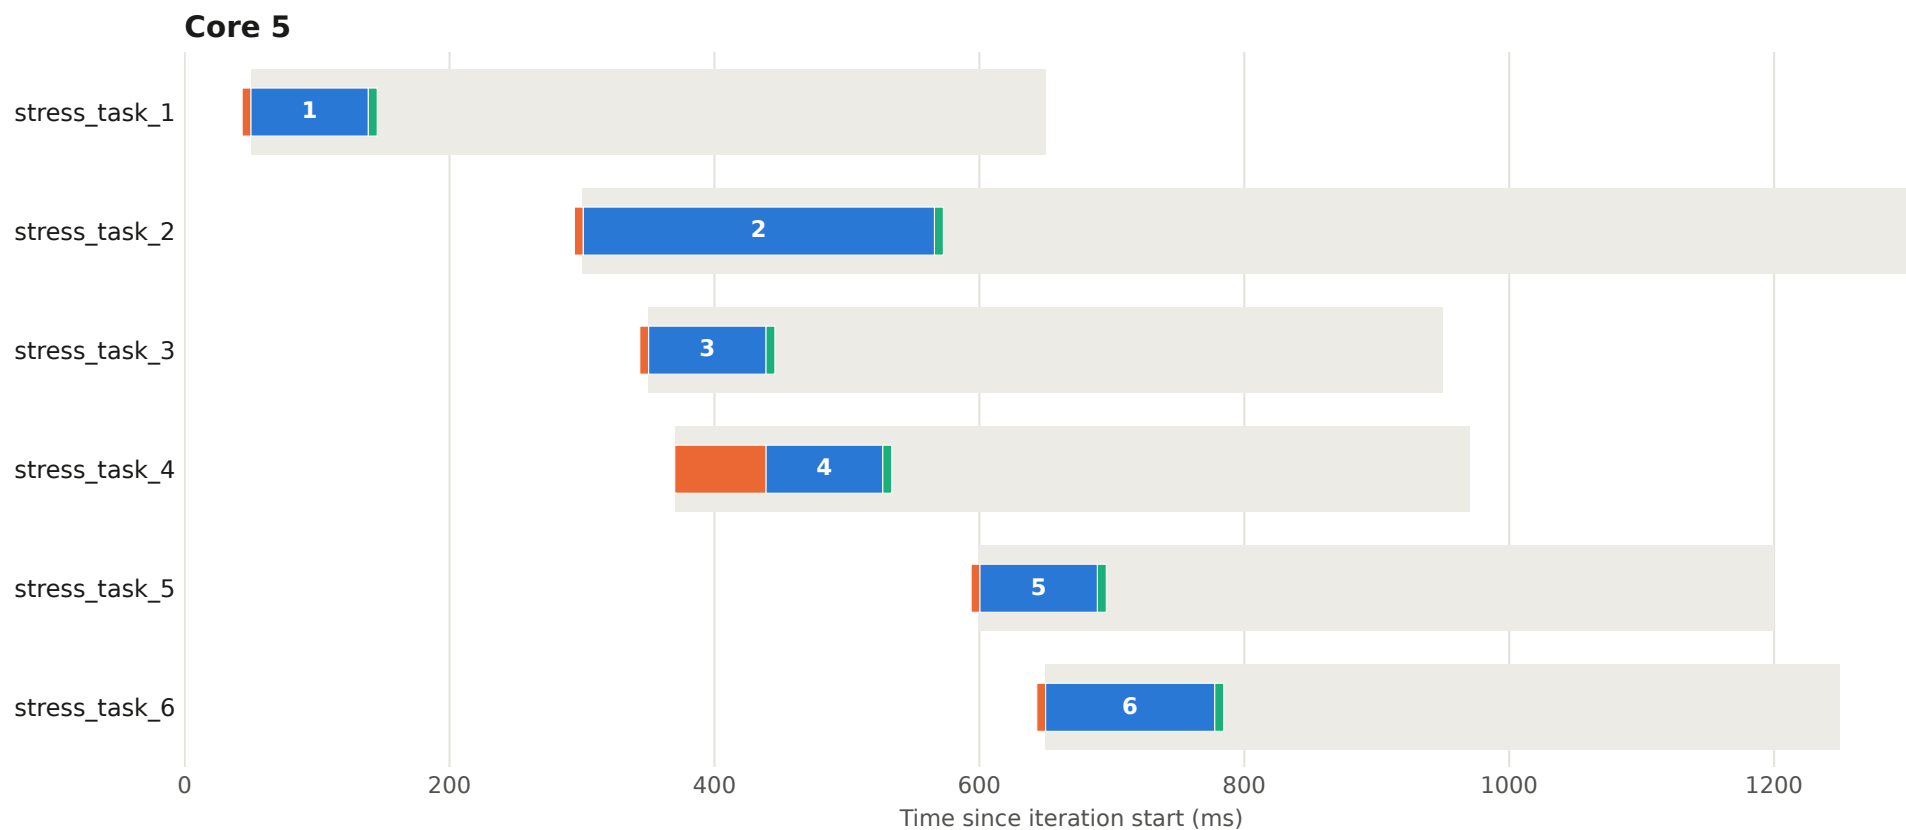


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 96 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

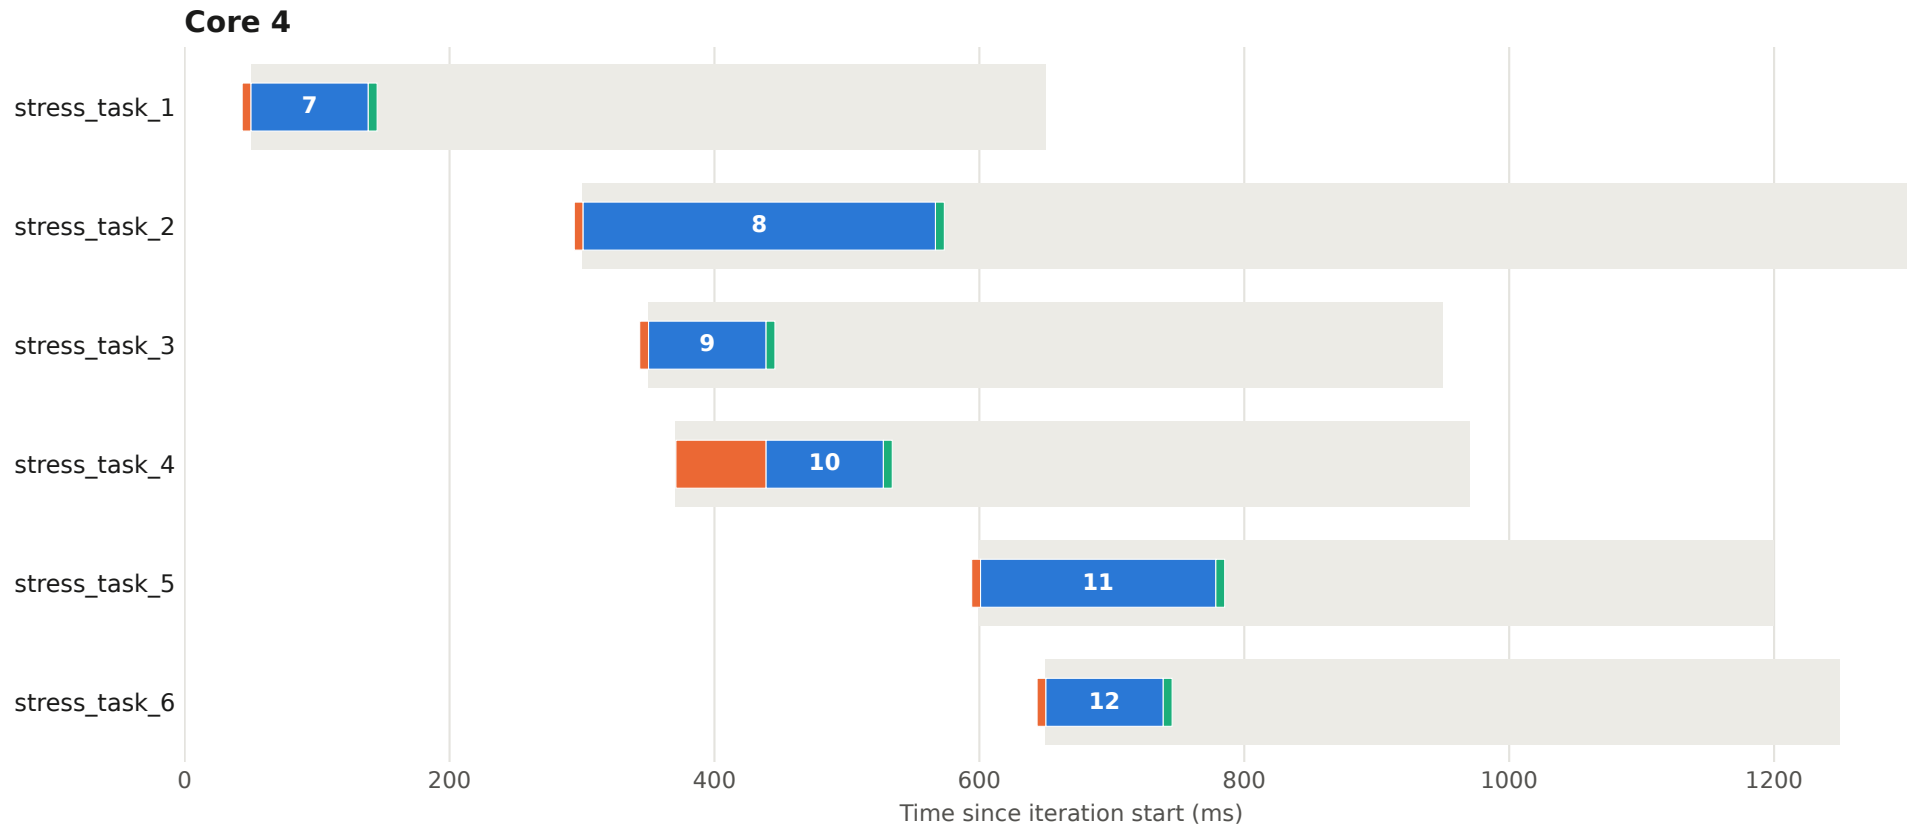


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 96 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

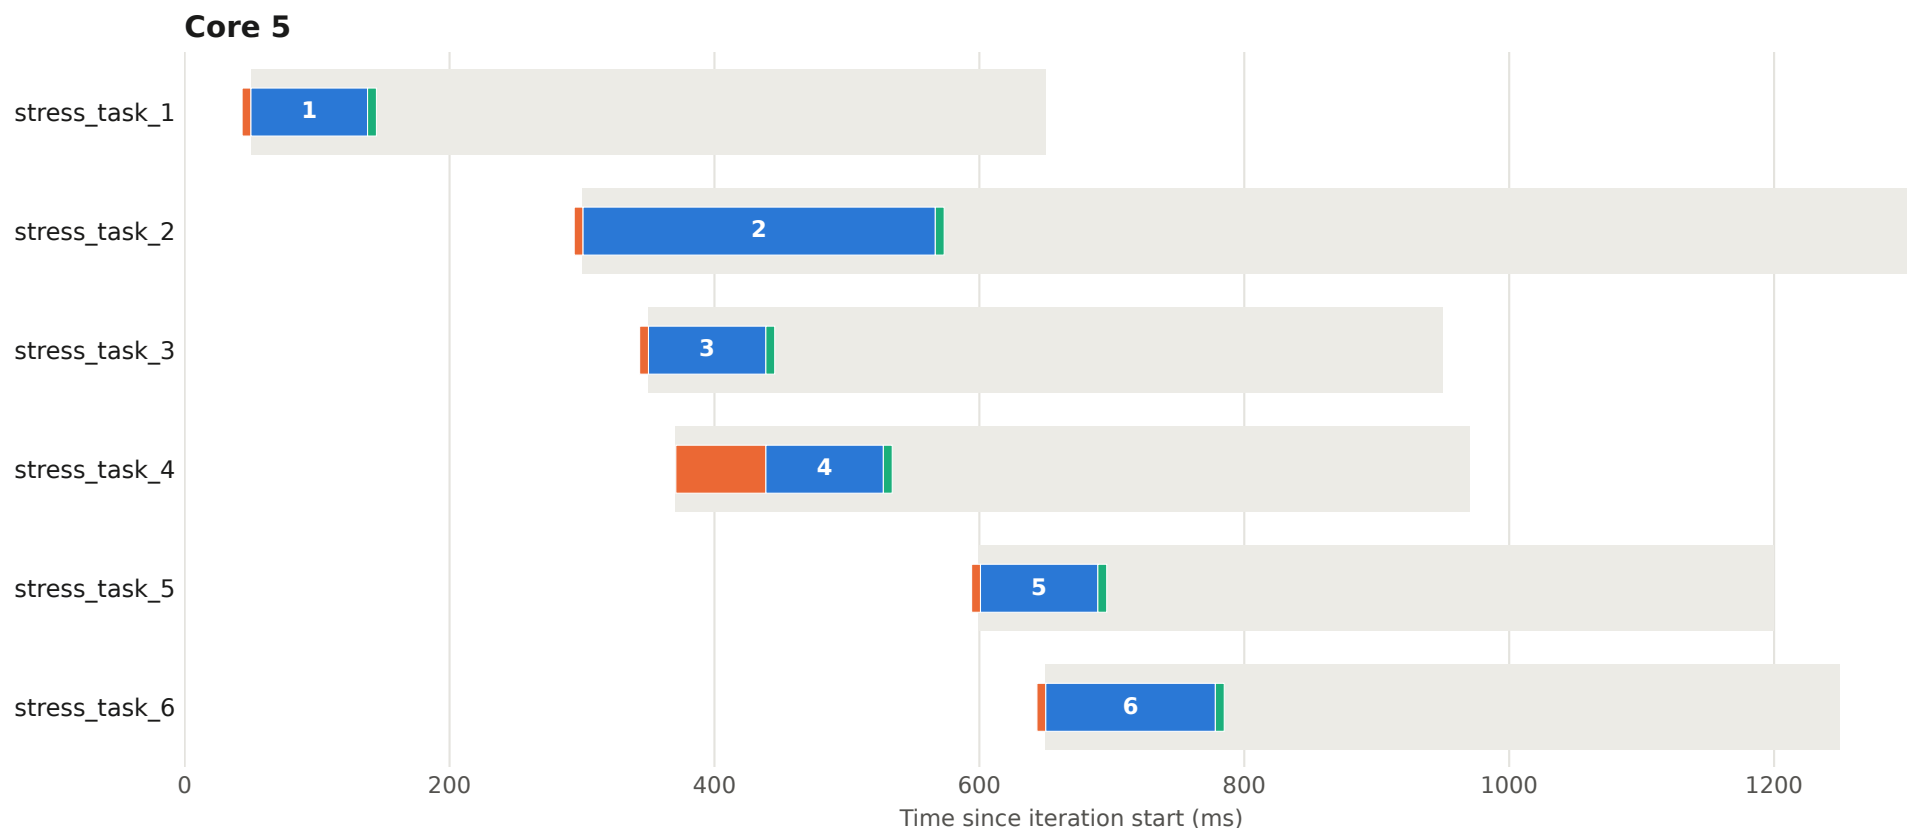


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 97 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

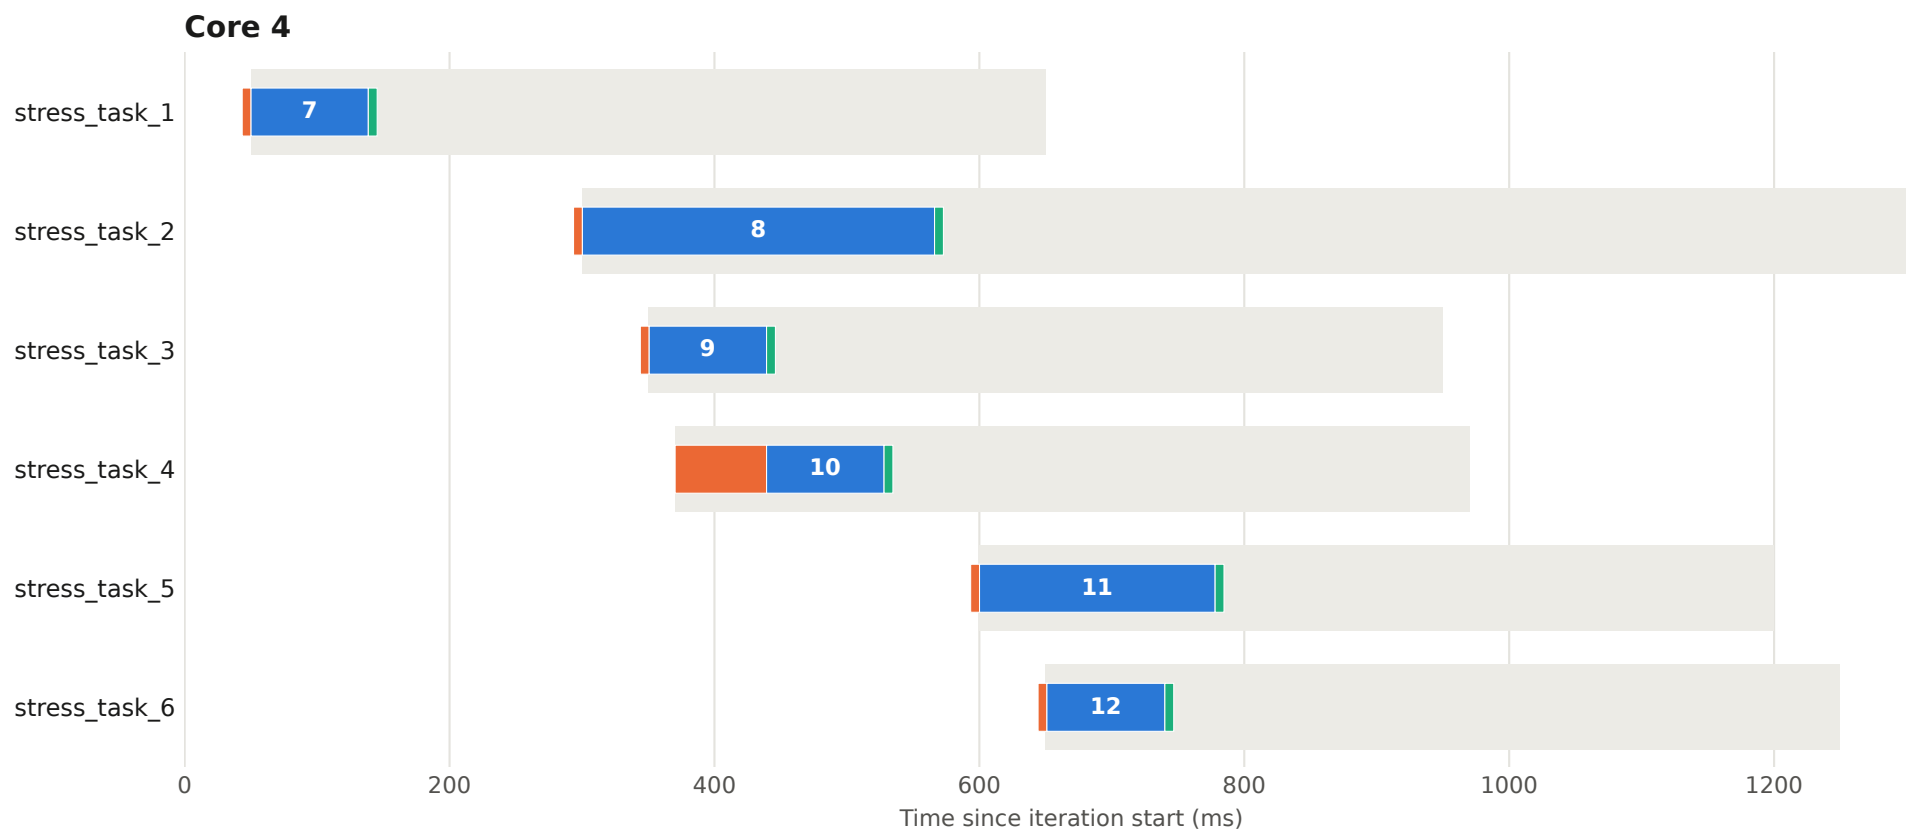


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 97 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

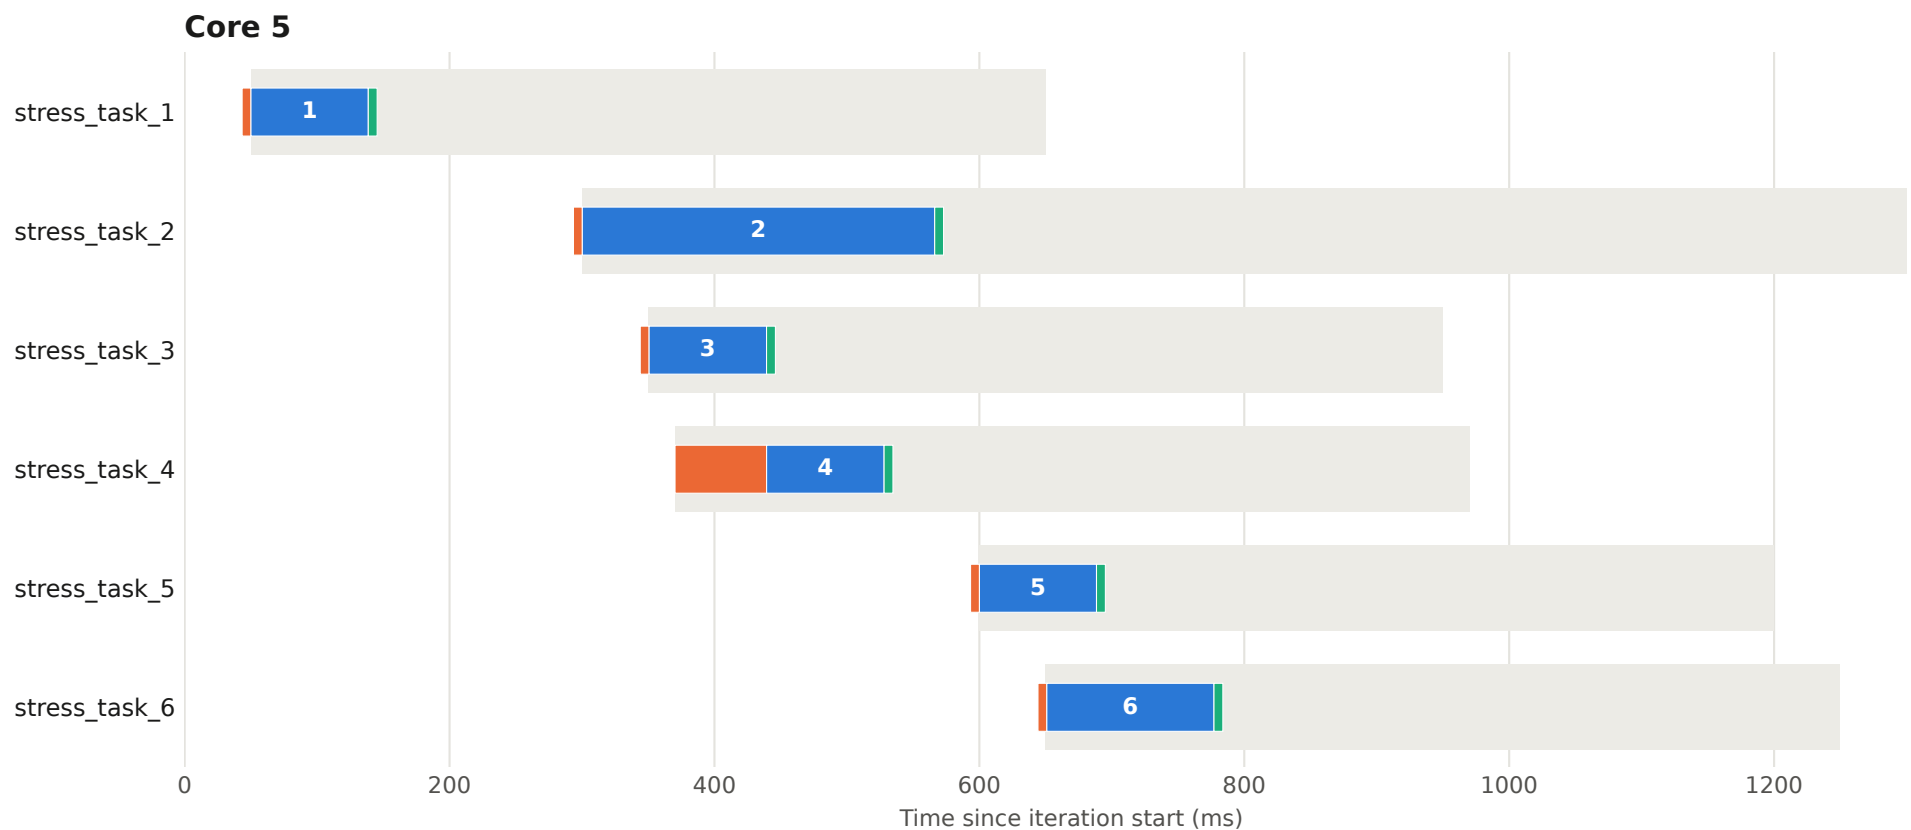


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 98 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

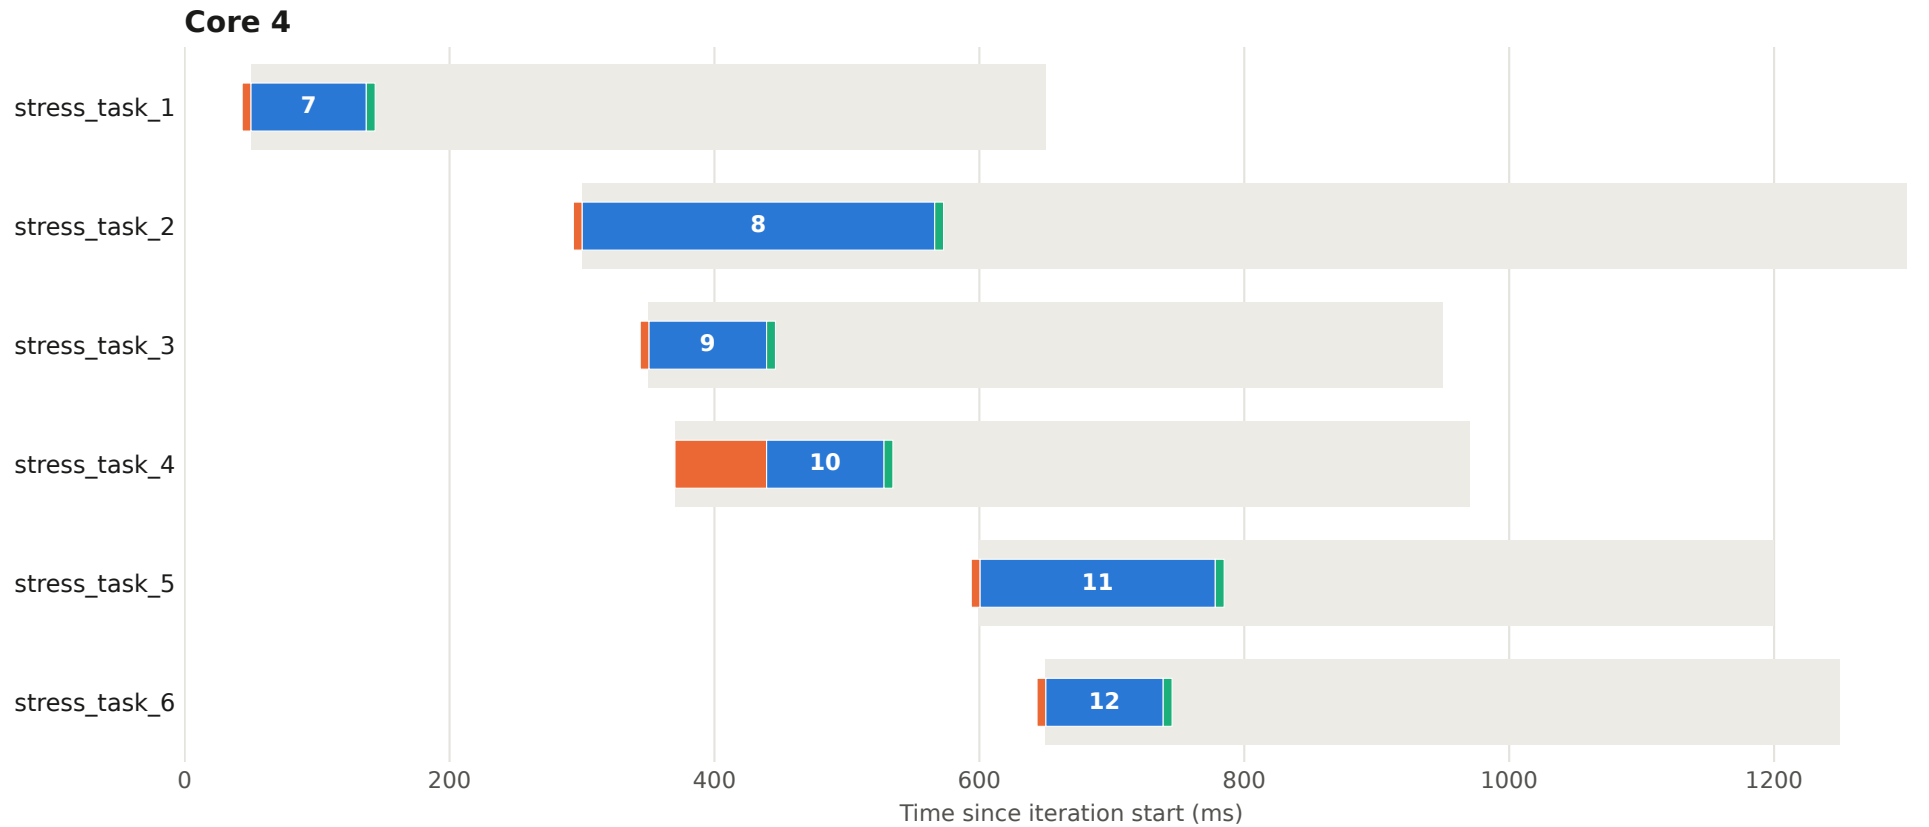


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 98 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

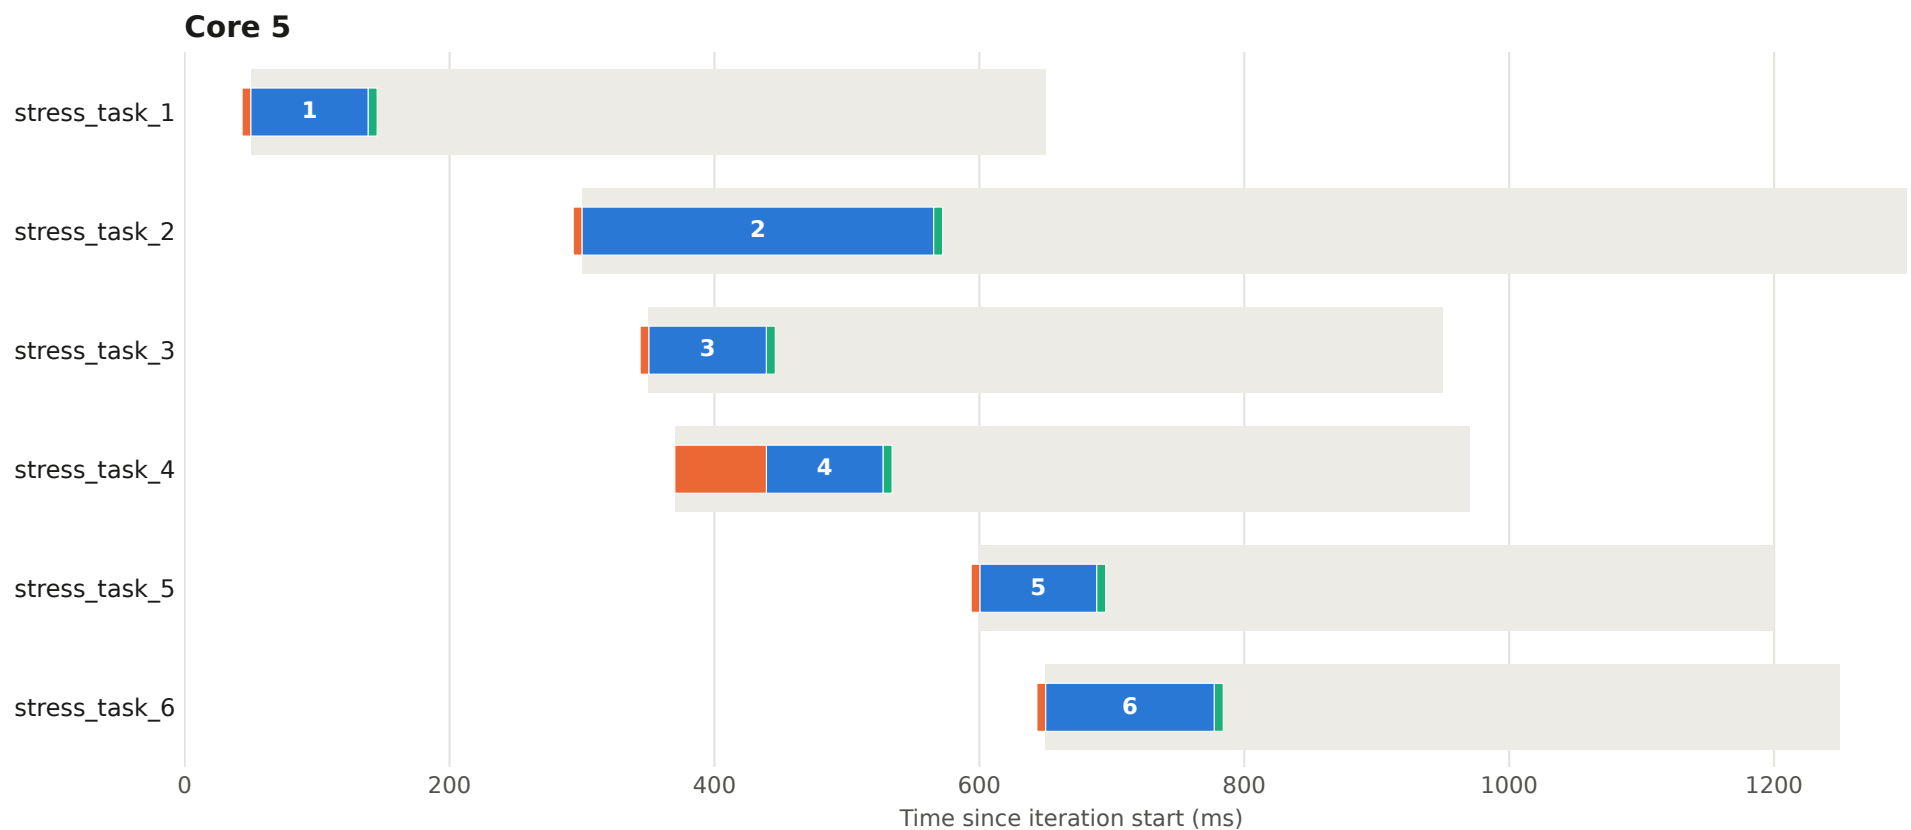


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 99 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

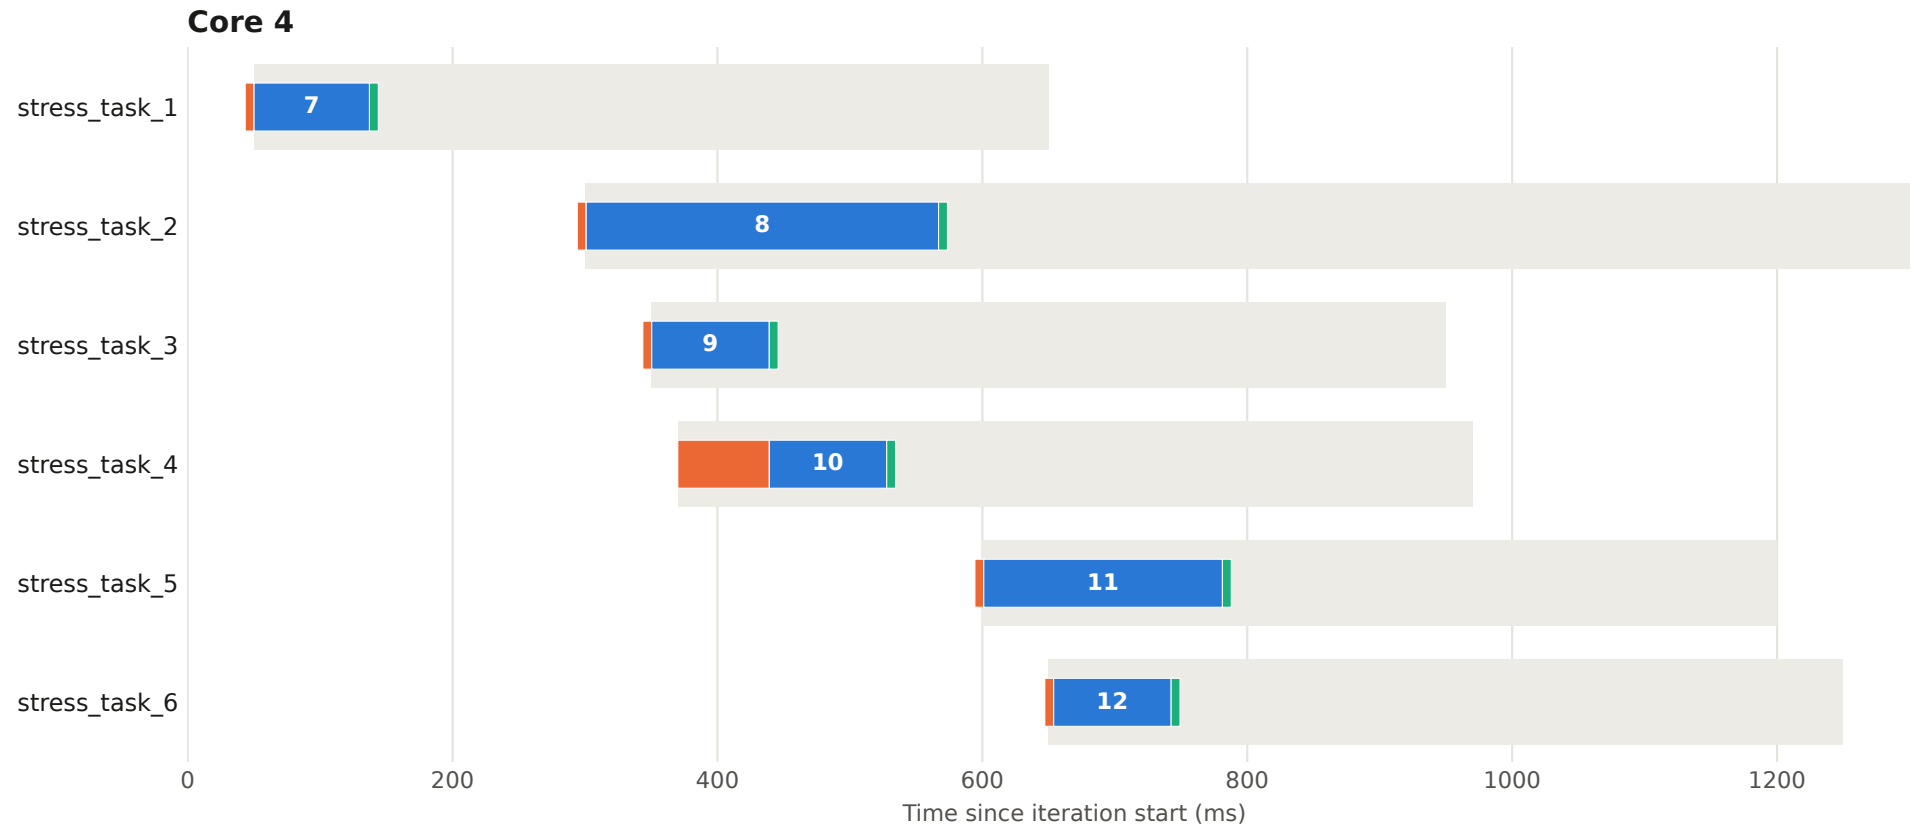


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 99 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

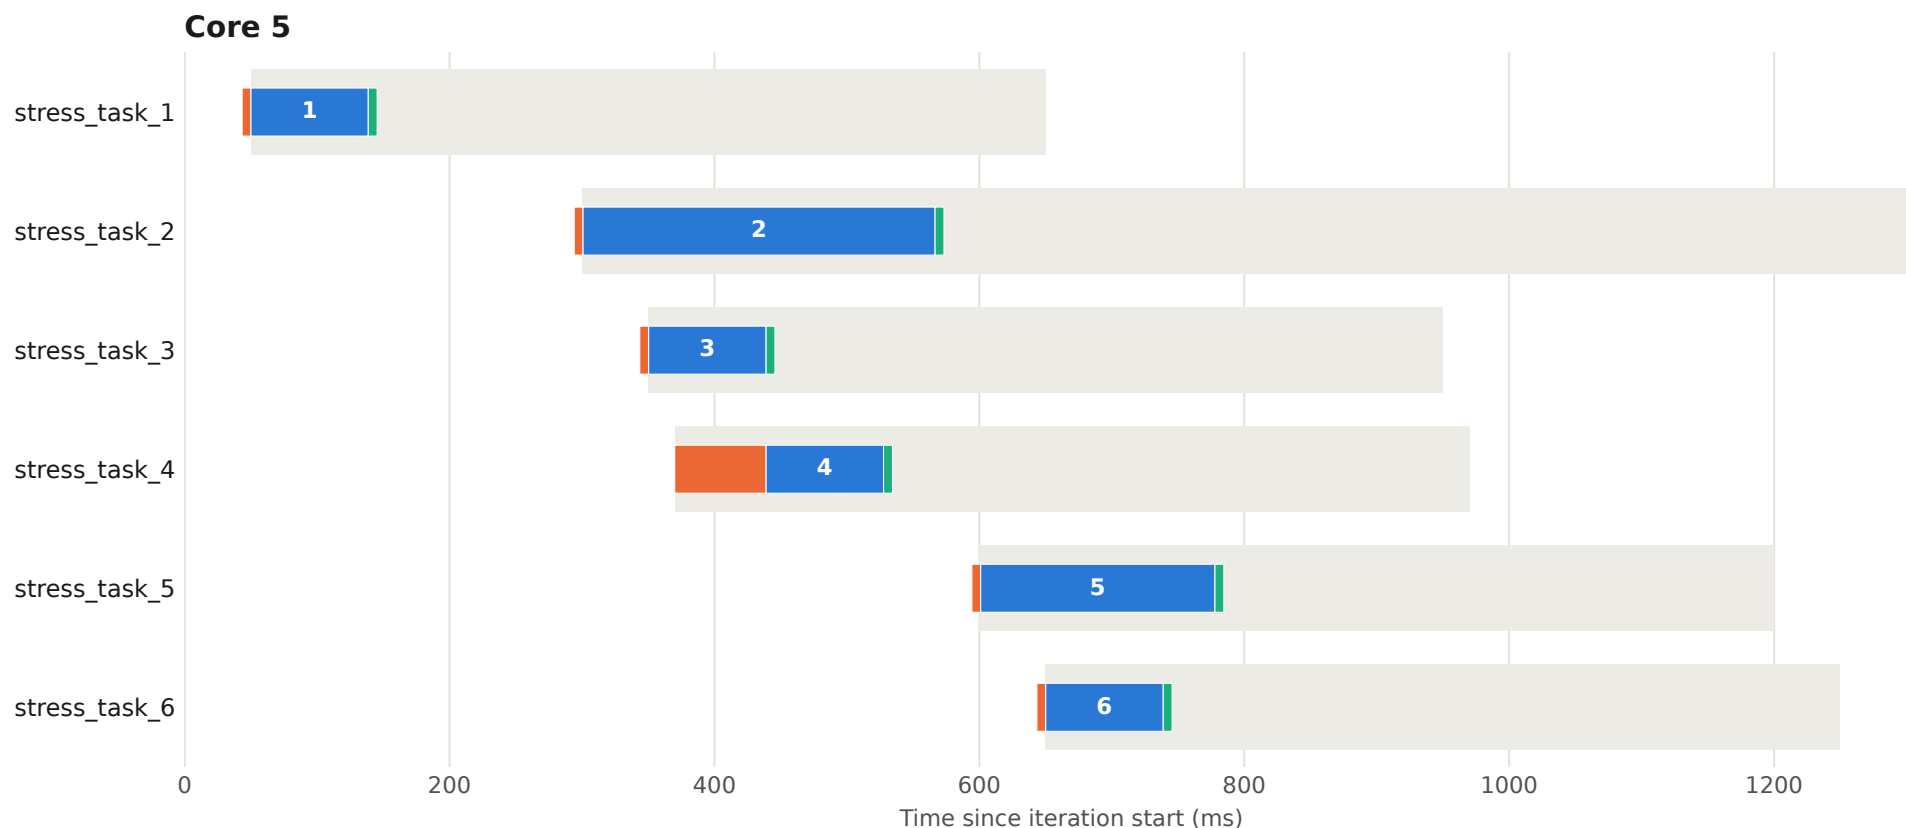

Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.