

Performance report

choreography-mqueue | test_dual_core_sep_1

Generated	2026-09-24 20:49:23
Schedule	Configurable CPU/IO Benchmark
Iterations in logs	100 (#0 - #99), manifest declares 5
Tasks	1=stress_task_1, 2=stress_task_2, 3=stress_task_3, 4=stress_task_4, 5=stress_task_5, 6=stress_task_6
Cores used	5
PERF records	600
Log sources	stress_task_1.log, stress_task_2.log, stress_task_3.log, stress_task_4.log, stress_task_5.log, stress_task_6.log
Manifest	tests/test_0_code/manifest.yaml

Statistics summary


All values in milliseconds | samples per task: 100 iteration(s)

Task ID	Image name	Metric	Mean	Std Dev	Min	Max	Median	p99
1	stress_task_1	q_em_tw_ms	0.072	0.014	0.055	0.180	0.071	0.093
		t_in_tw_ms	88.061	0.487	86.753	88.460	88.303	88.404
		q_tw_em_ms	0.008	0.004	0.005	0.020	0.006	0.018
		total_ms	88.141	0.486	86.822	88.541	88.376	88.491
2	stress_task_2	q_em_tw_ms	0.070	0.017	0.050	0.223	0.069	0.096
		t_in_tw_ms	264.723	0.477	262.435	265.529	264.808	265.466
		q_tw_em_ms	0.006	0.002	0.004	0.019	0.006	0.017
		total_ms	264.799	0.479	262.510	265.761	264.877	265.545
3	stress_task_3	q_em_tw_ms	0.061	0.017	0.041	0.203	0.059	0.092
		t_in_tw_ms	88.236	0.177	87.739	88.512	88.297	88.430
		q_tw_em_ms	0.007	0.003	0.005	0.020	0.006	0.018
		total_ms	88.304	0.178	87.809	88.608	88.362	88.606
4	stress_task_4	q_em_tw_ms	68.283	0.386	67.429	69.227	68.277	69.071
		t_in_tw_ms	88.217	0.322	86.825	88.790	88.355	88.496
		q_tw_em_ms	0.005	0.001	0.004	0.011	0.005	0.008
		total_ms	156.505	0.527	154.773	157.611	156.488	157.491
5	stress_task_5	q_em_tw_ms	0.071	0.013	0.051	0.188	0.069	0.097
		t_in_tw_ms	98.770	28.847	86.878	176.942	88.345	176.884
		q_tw_em_ms	0.006	0.003	0.005	0.020	0.006	0.019
		total_ms	98.848	28.847	86.952	177.020	88.431	176.969
6	stress_task_6	q_em_tw_ms	7.322	15.067	0.050	39.029	0.062	38.806
		t_in_tw_ms	114.580	17.840	86.891	127.566	126.106	127.501
		q_tw_em_ms	0.005	0.001	0.004	0.014	0.005	0.008
		total_ms	121.907	12.482	87.935	127.632	126.439	127.567

Execution plan - iteration 0

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

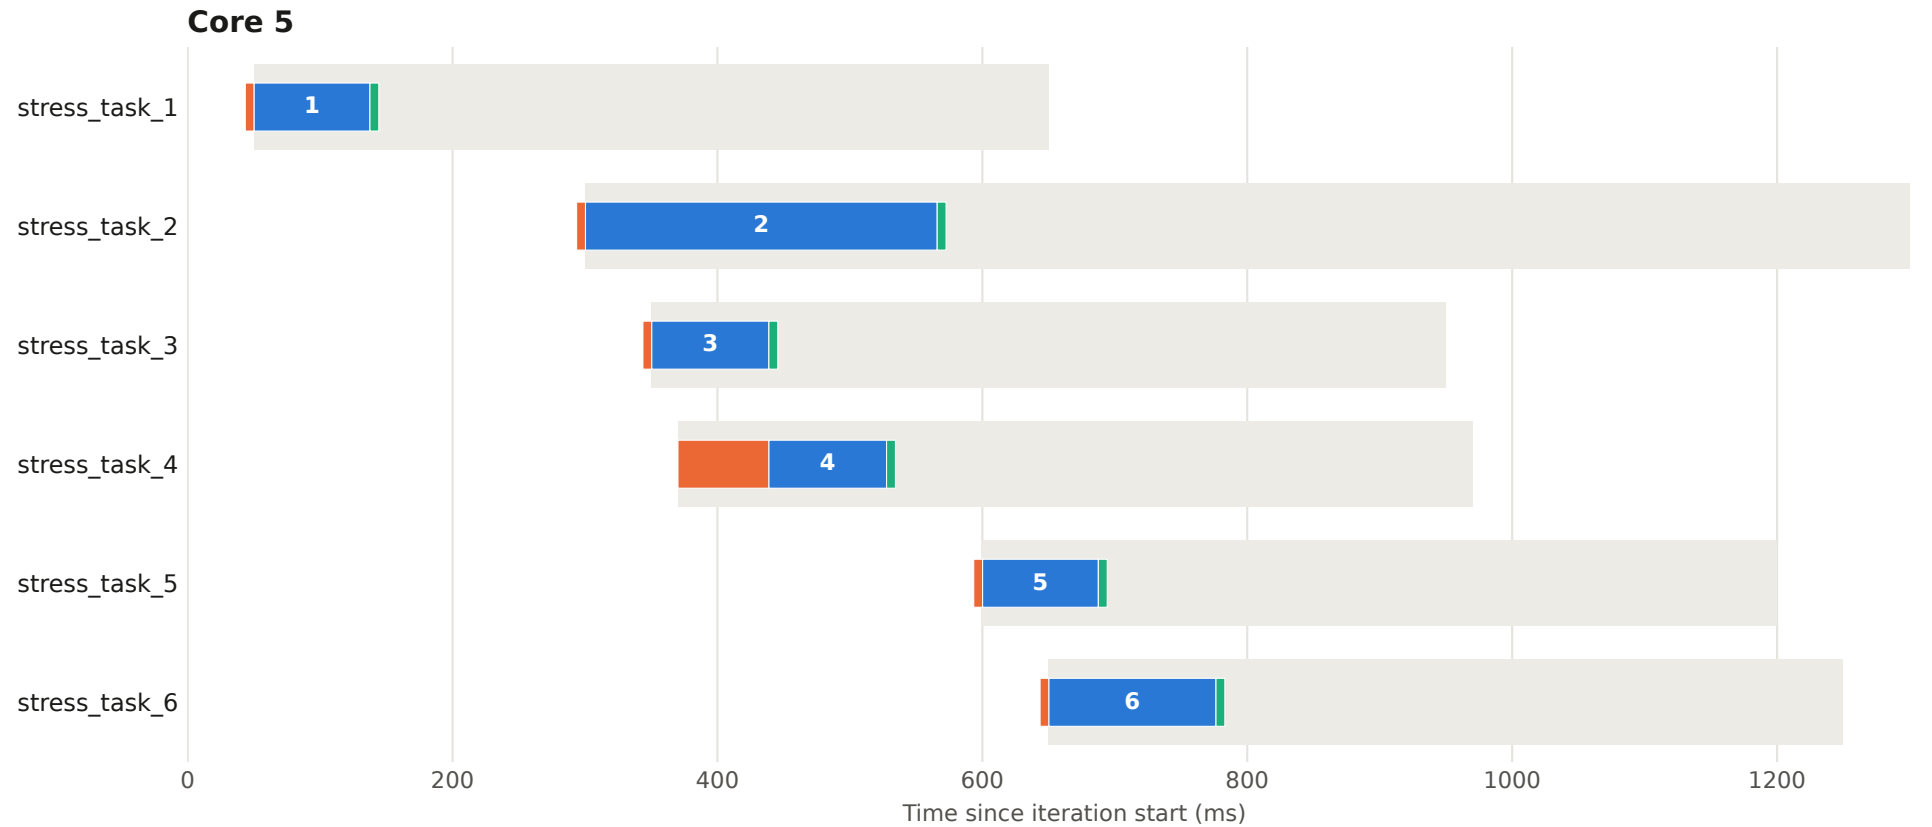


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 1

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

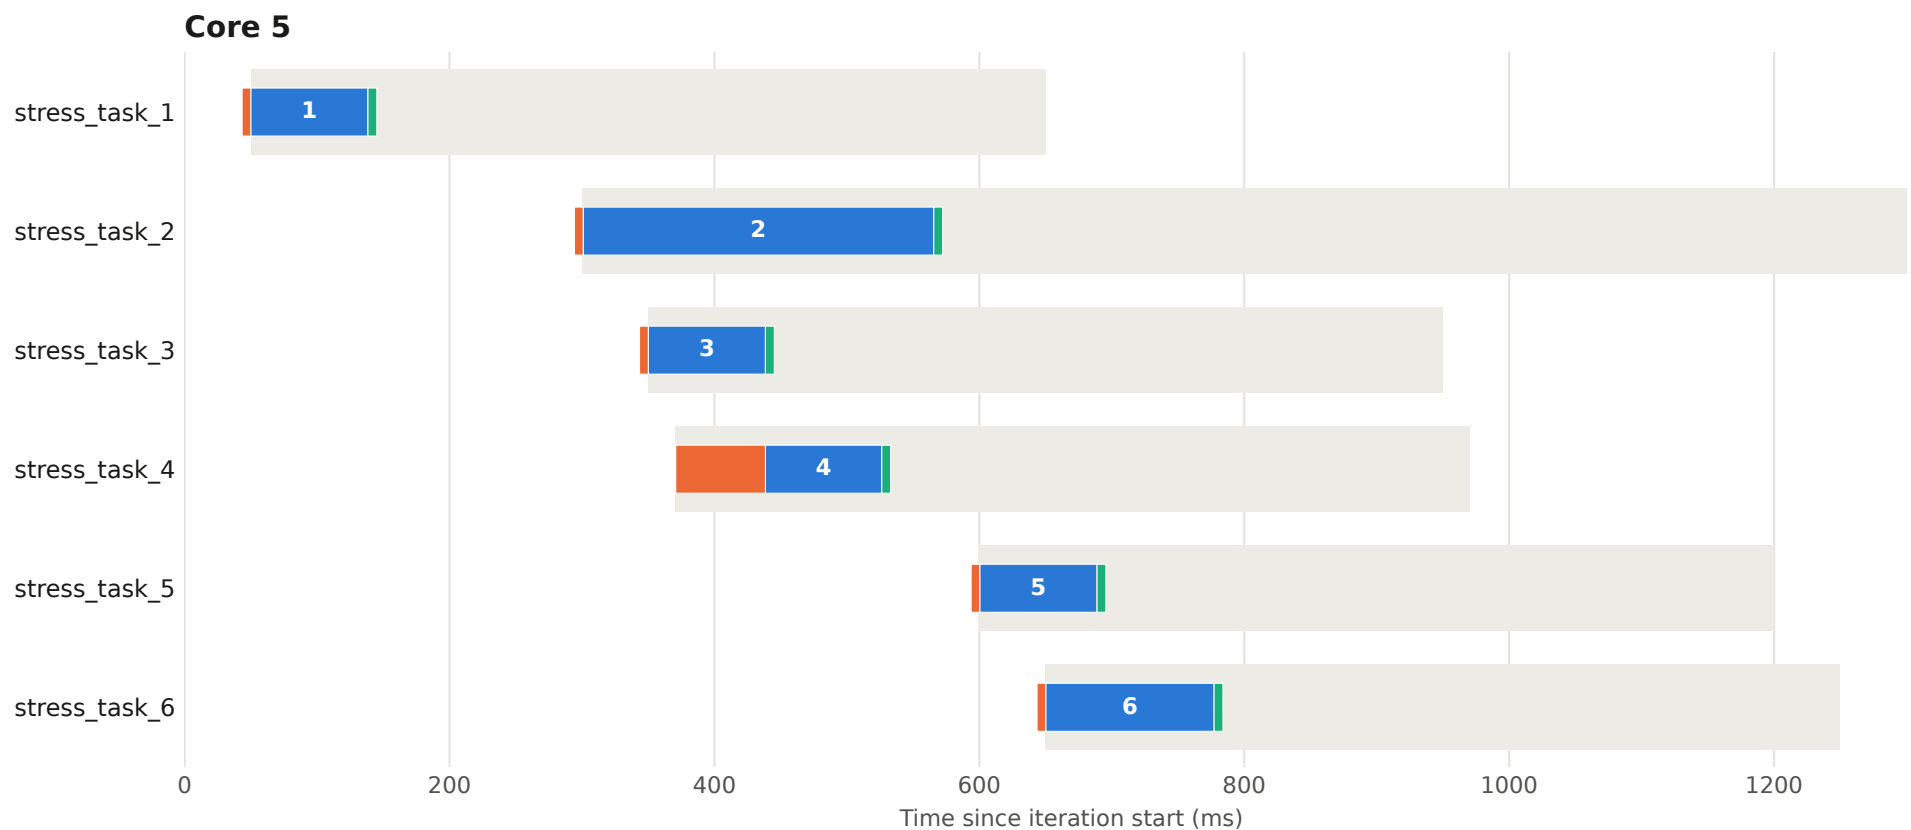


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 2

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

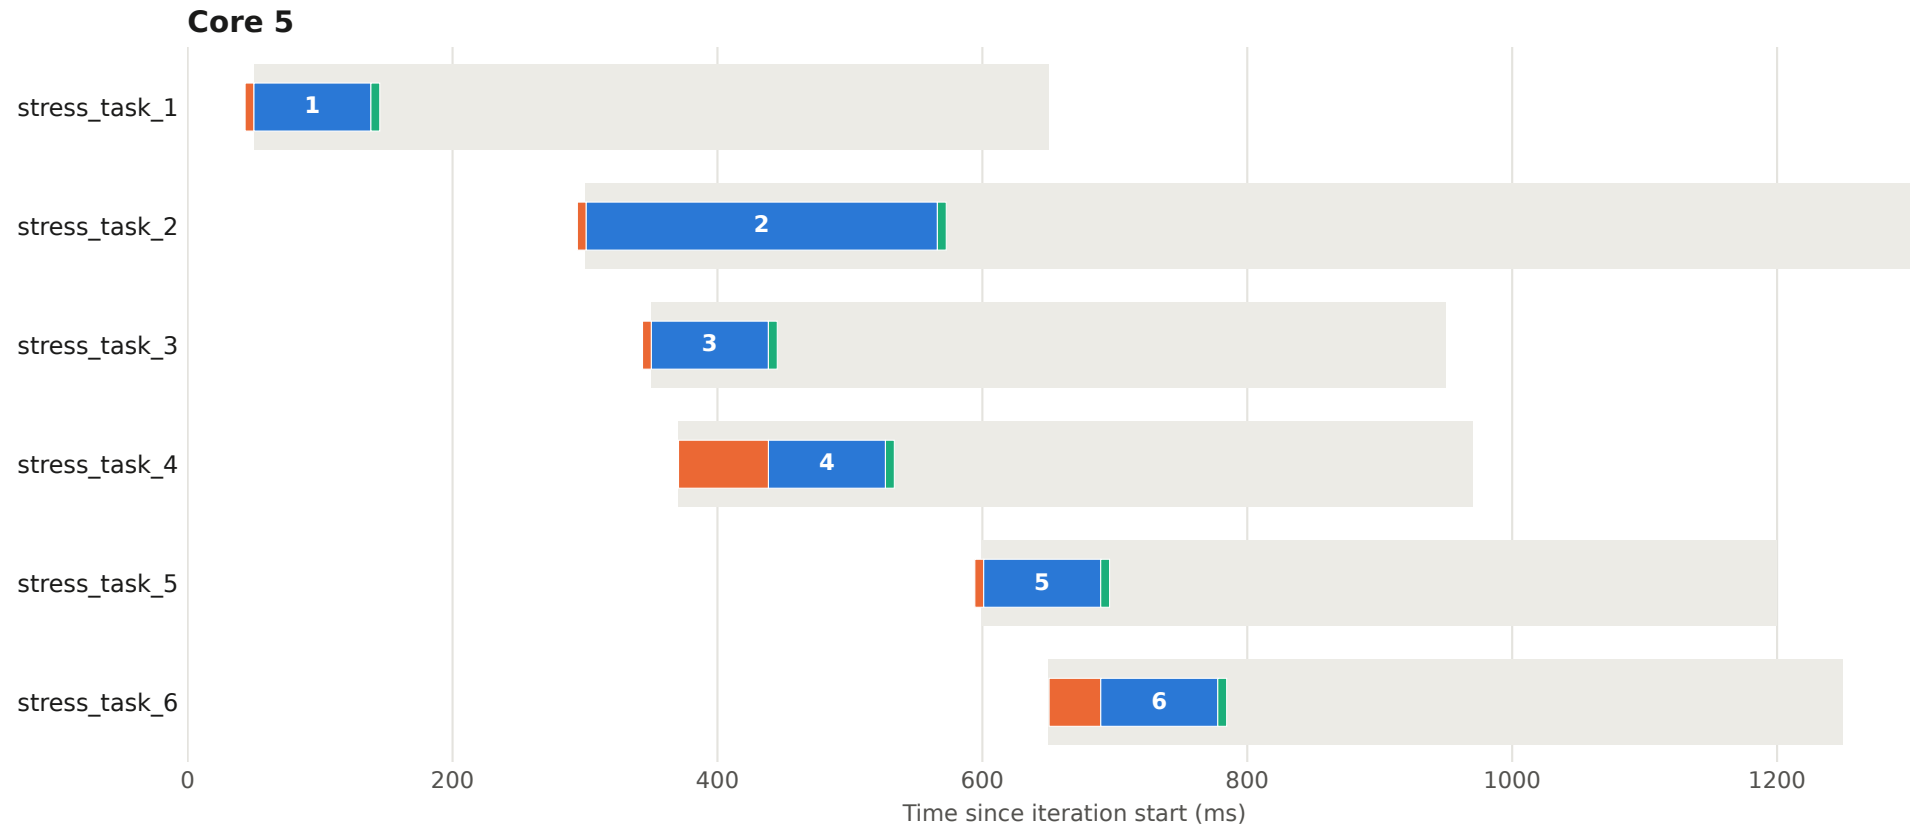


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

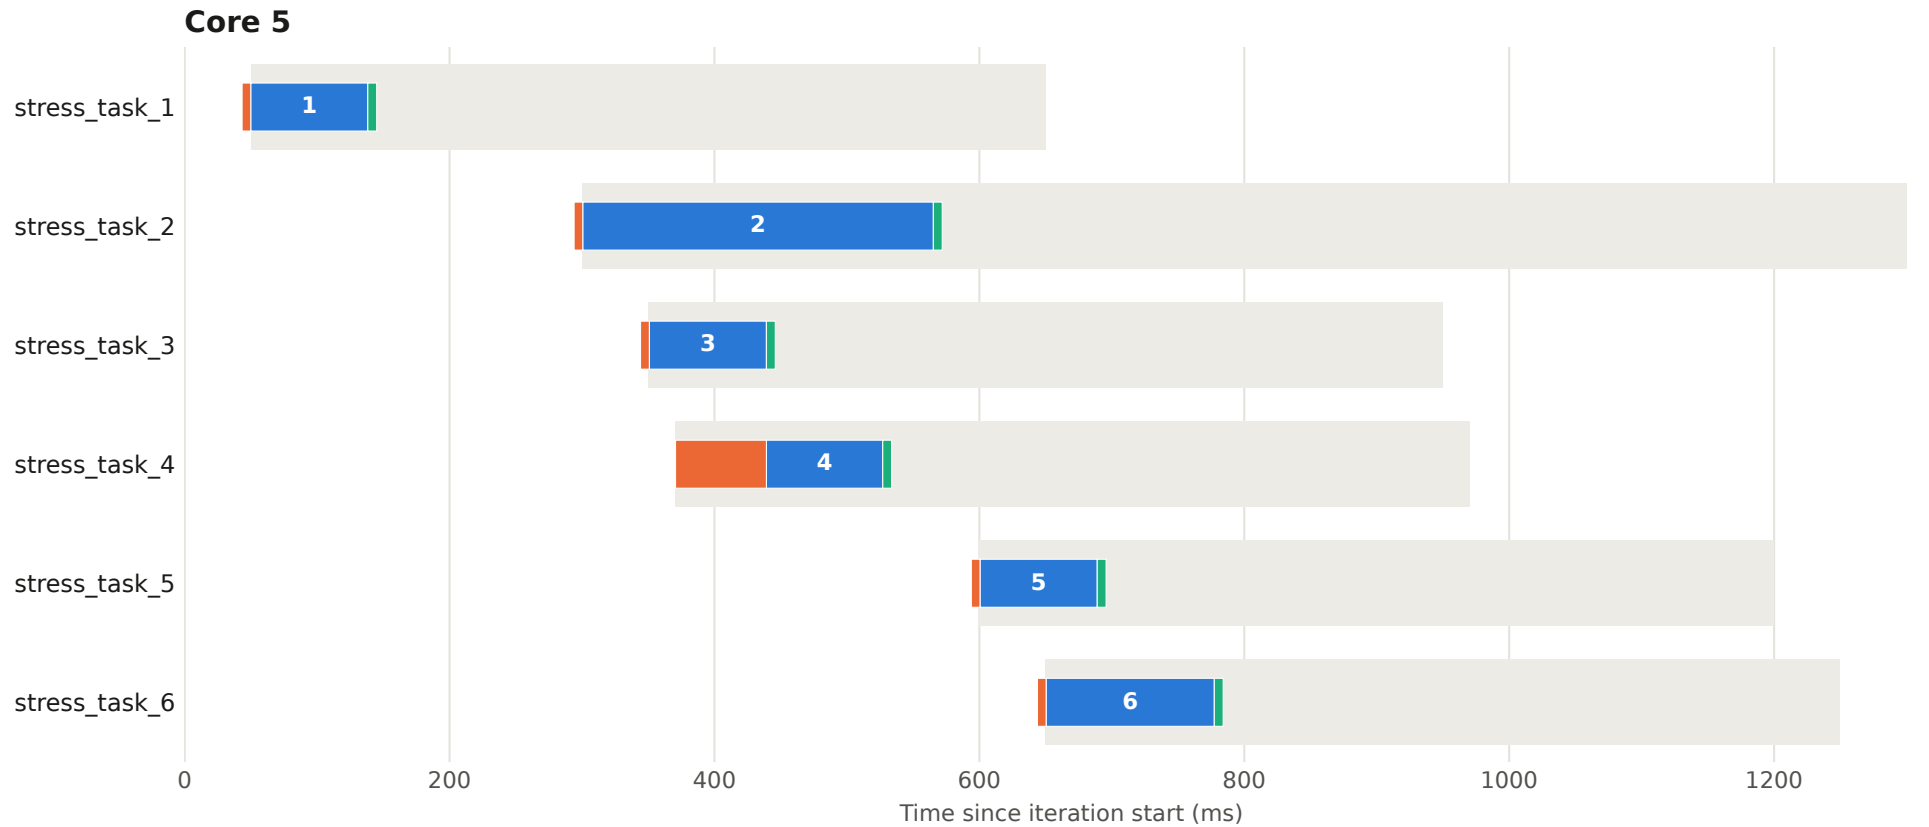


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

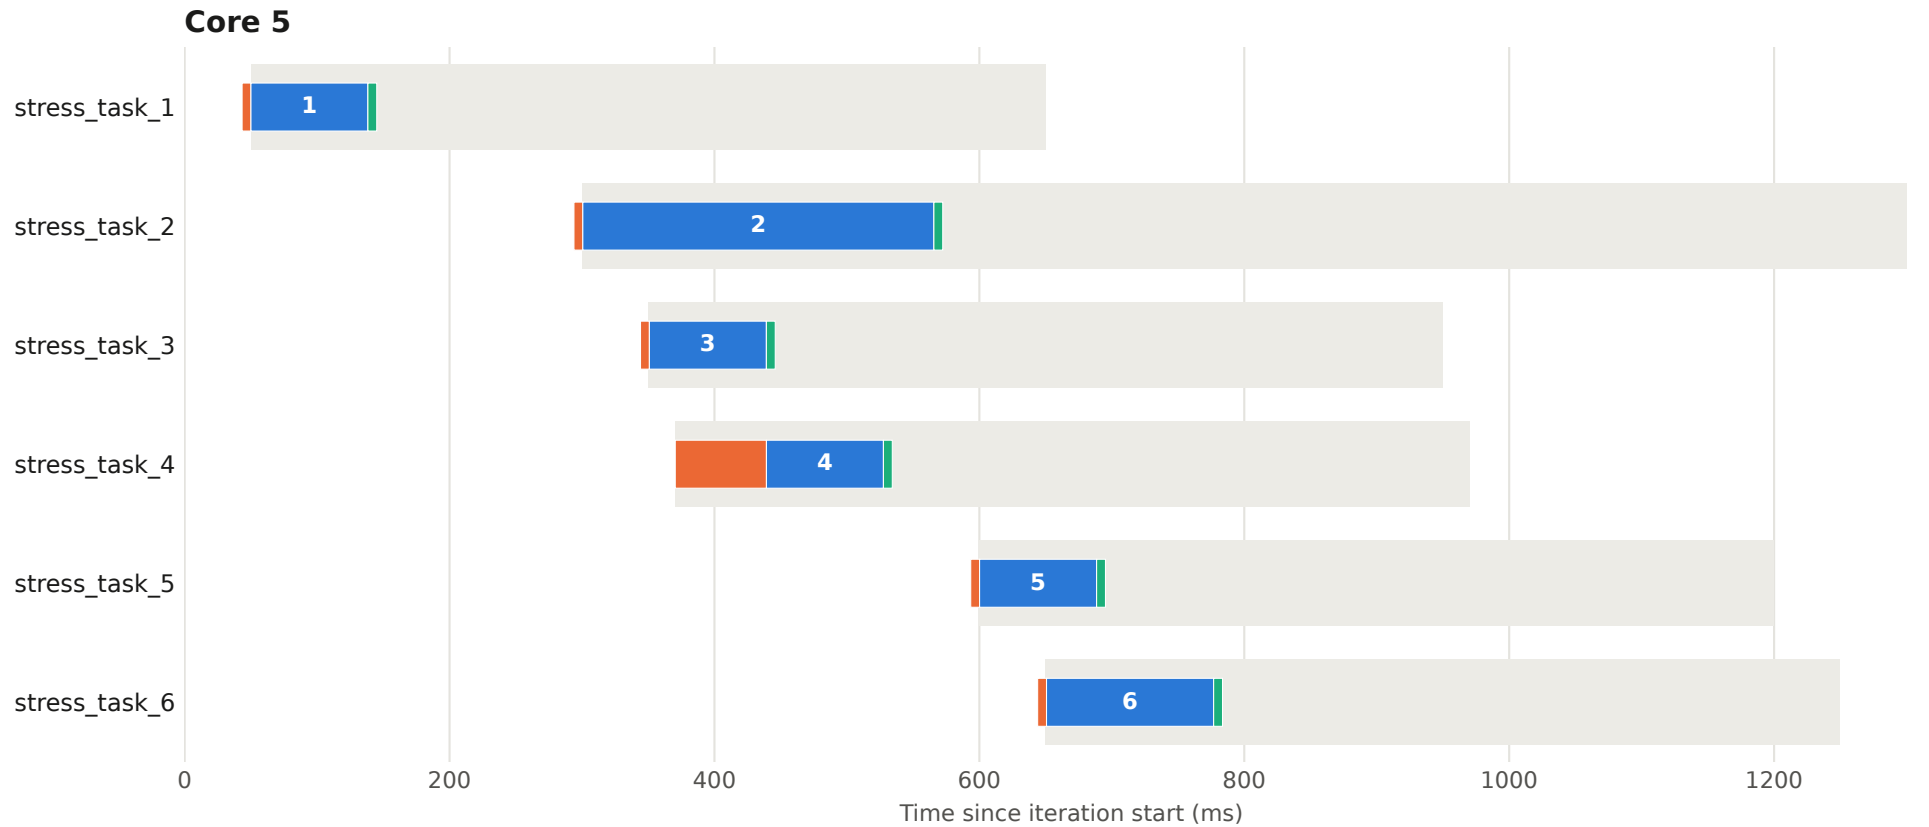


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

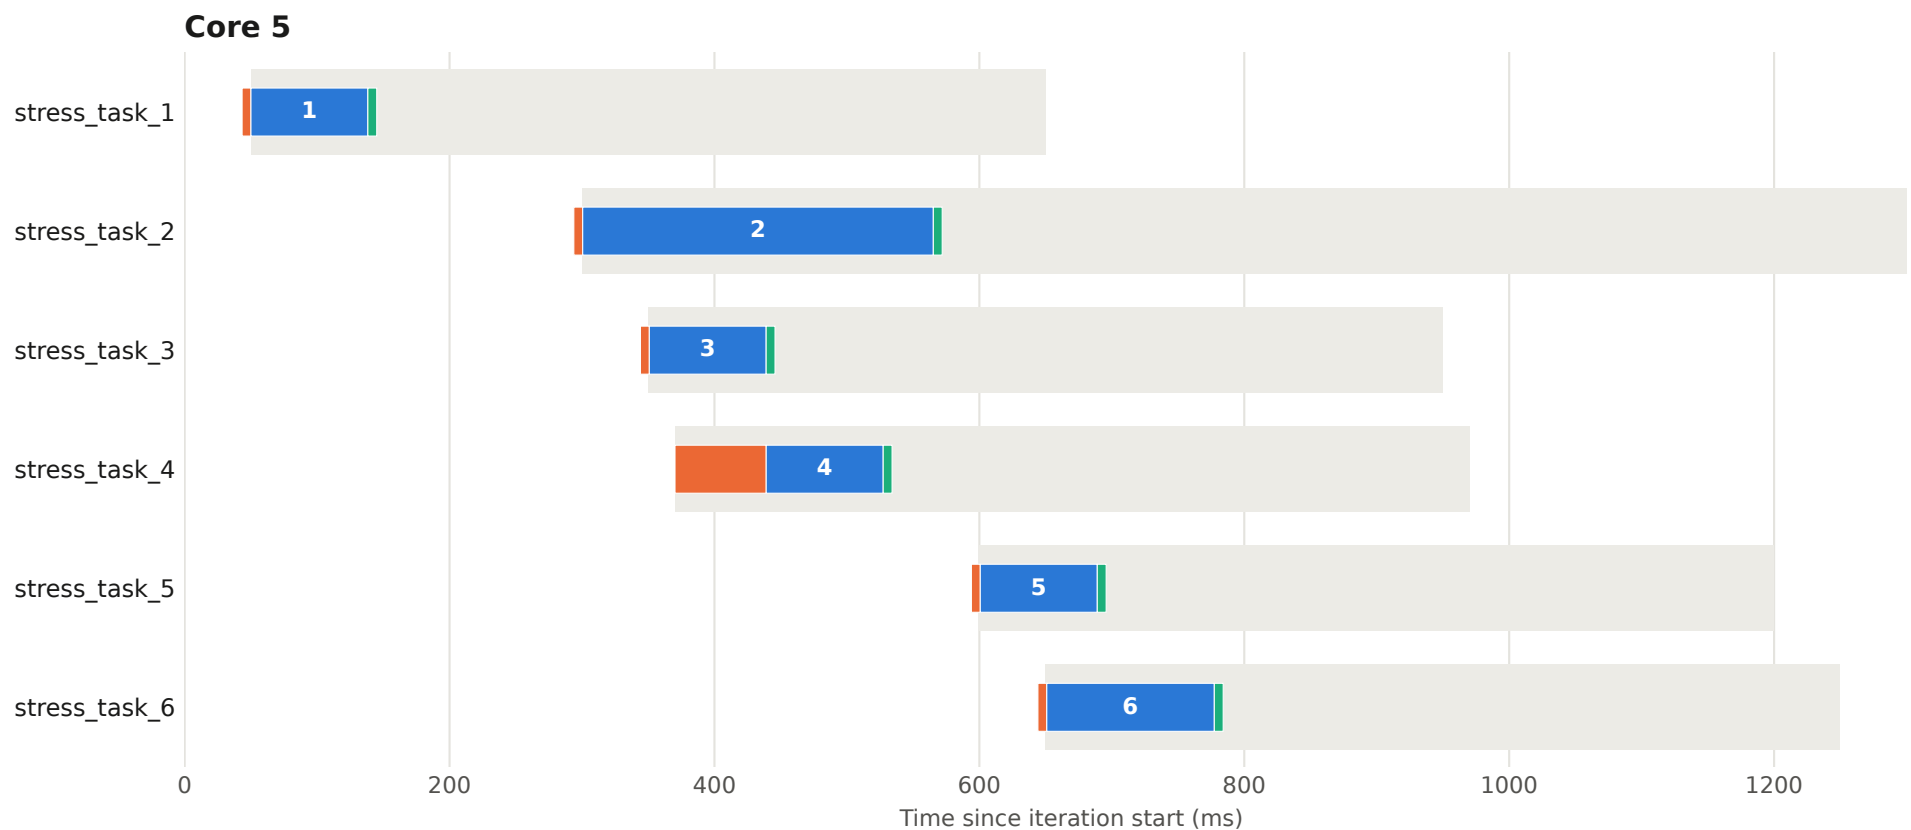


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

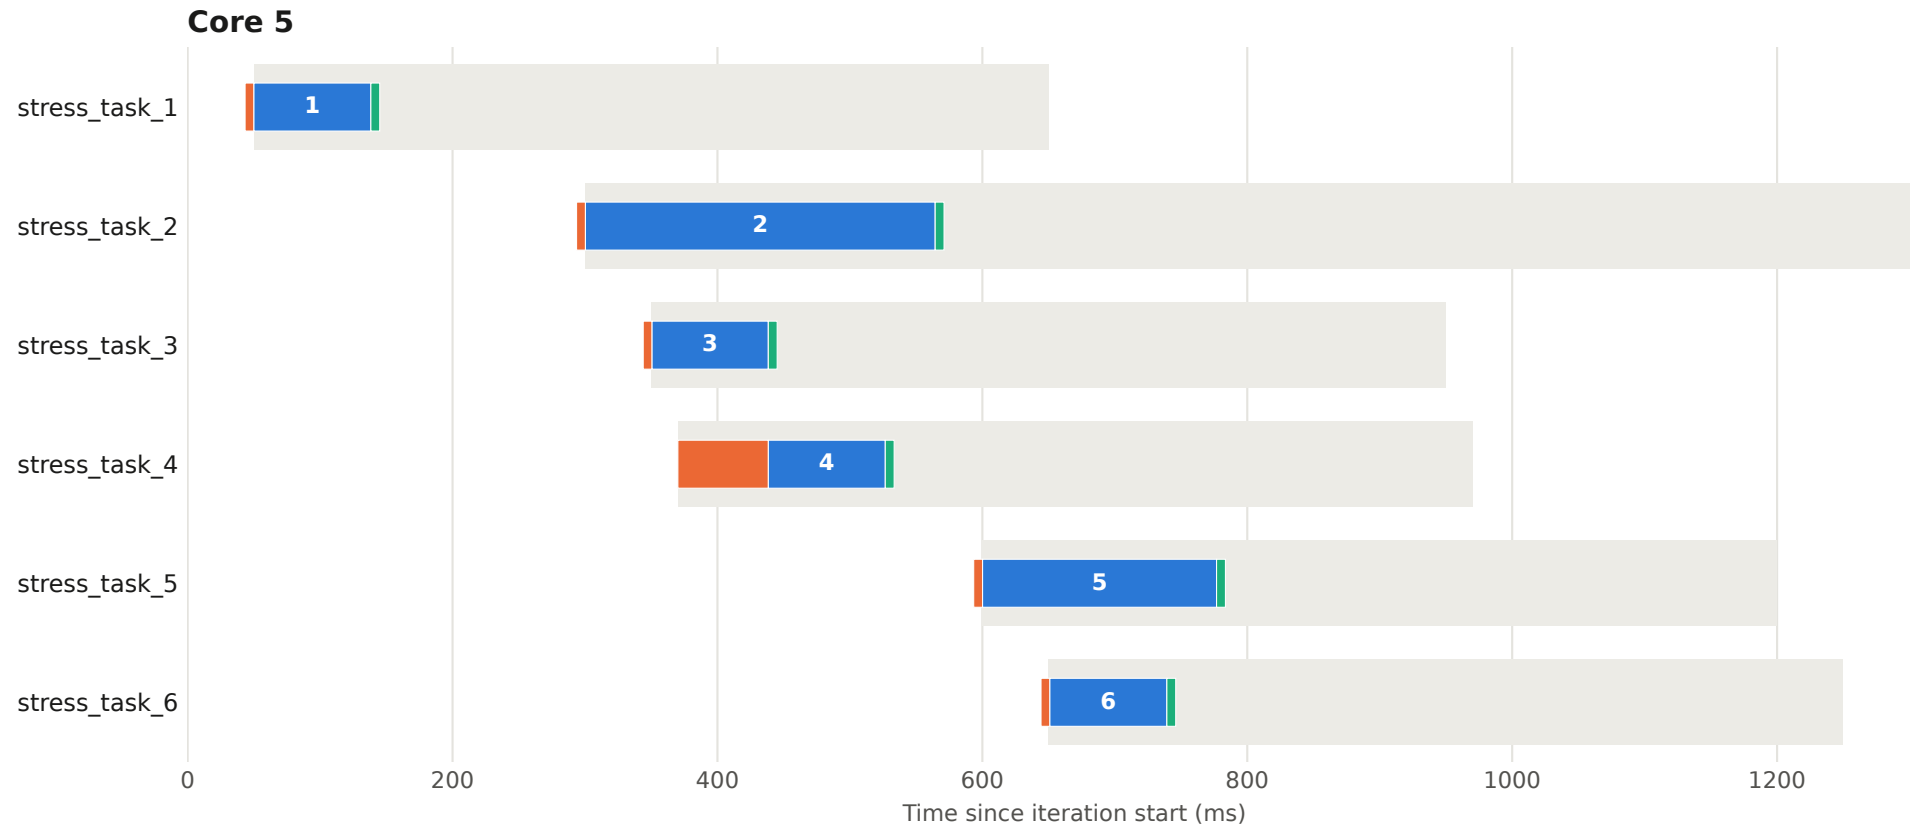


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

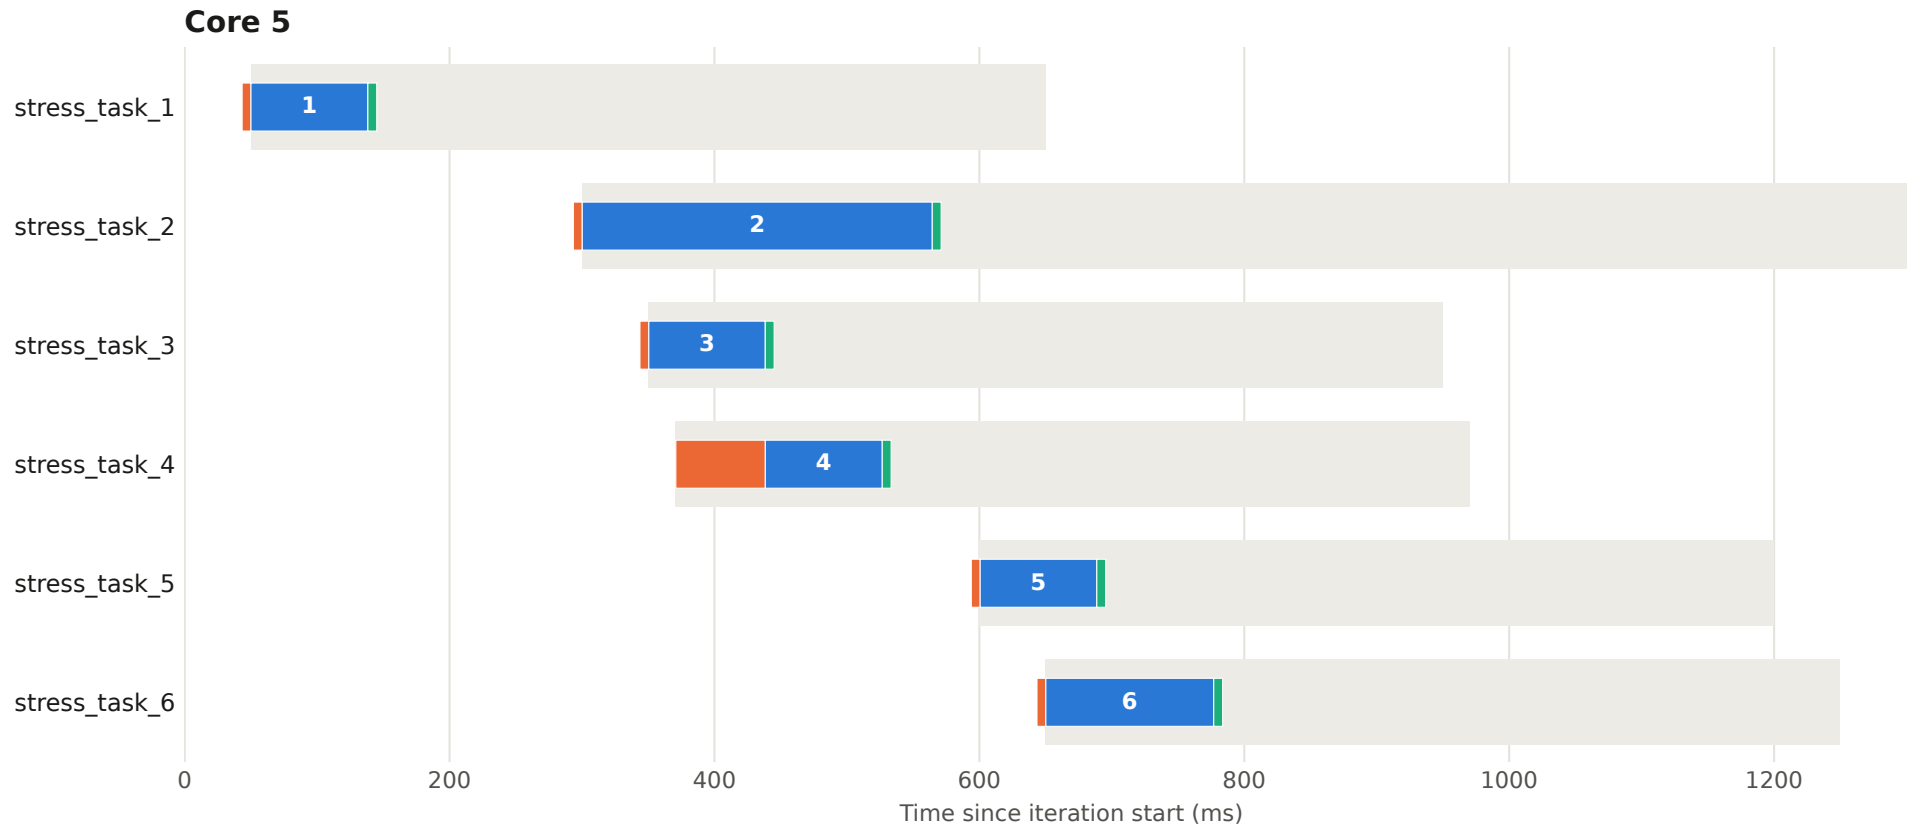


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 8

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

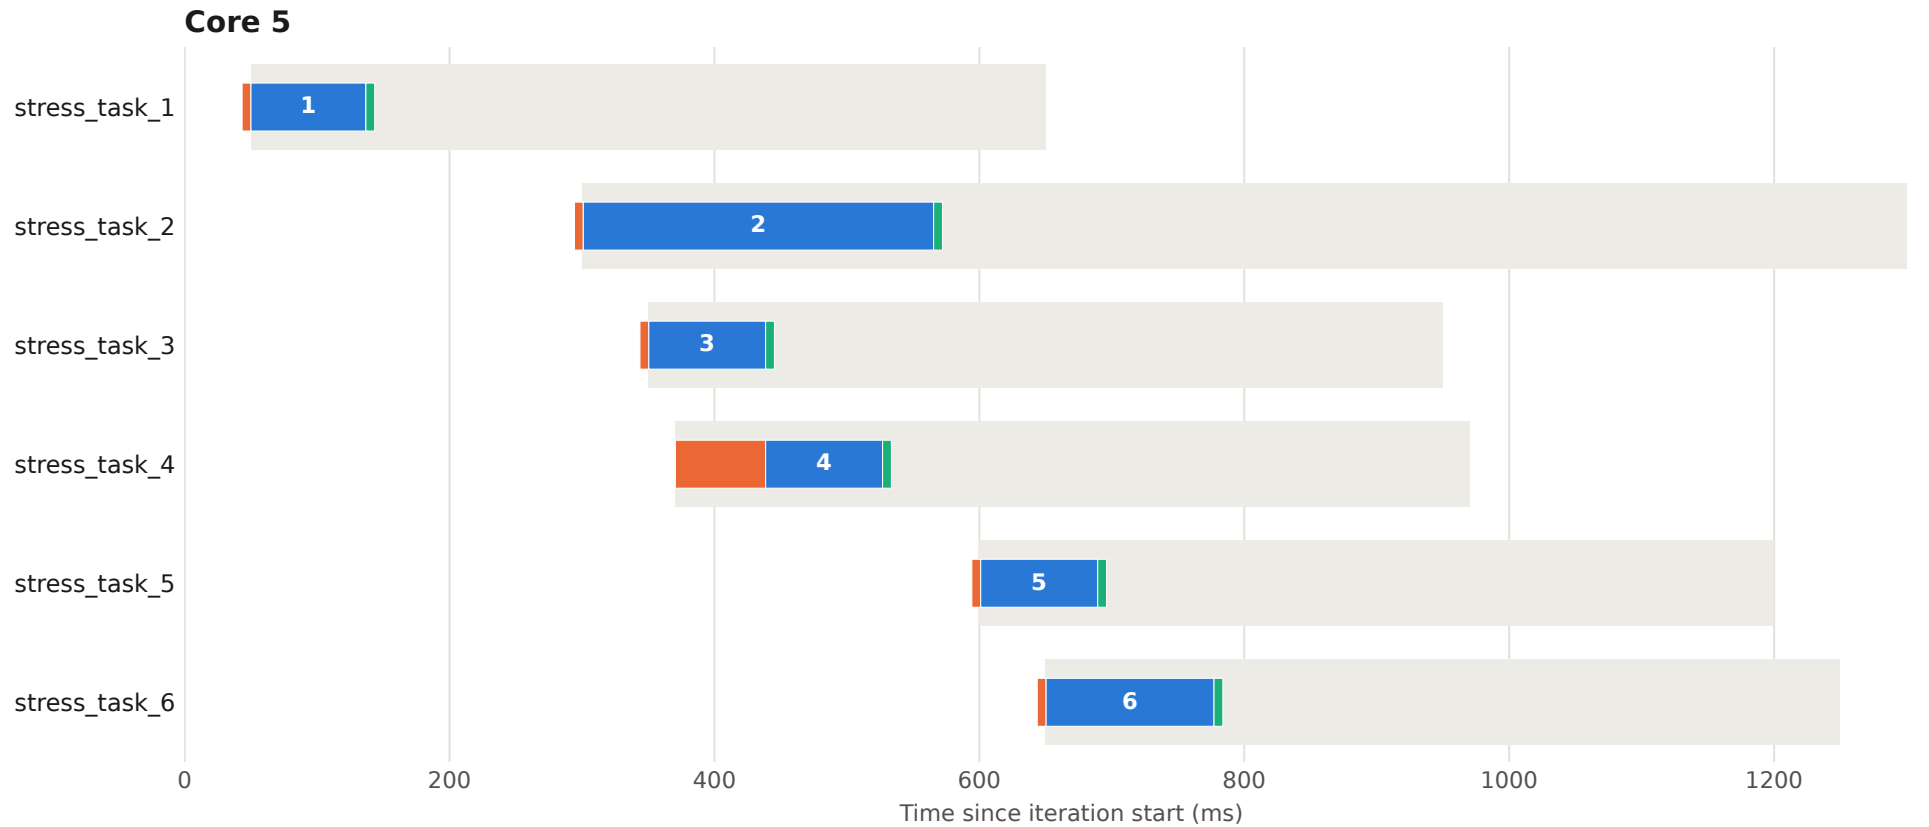


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 9

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

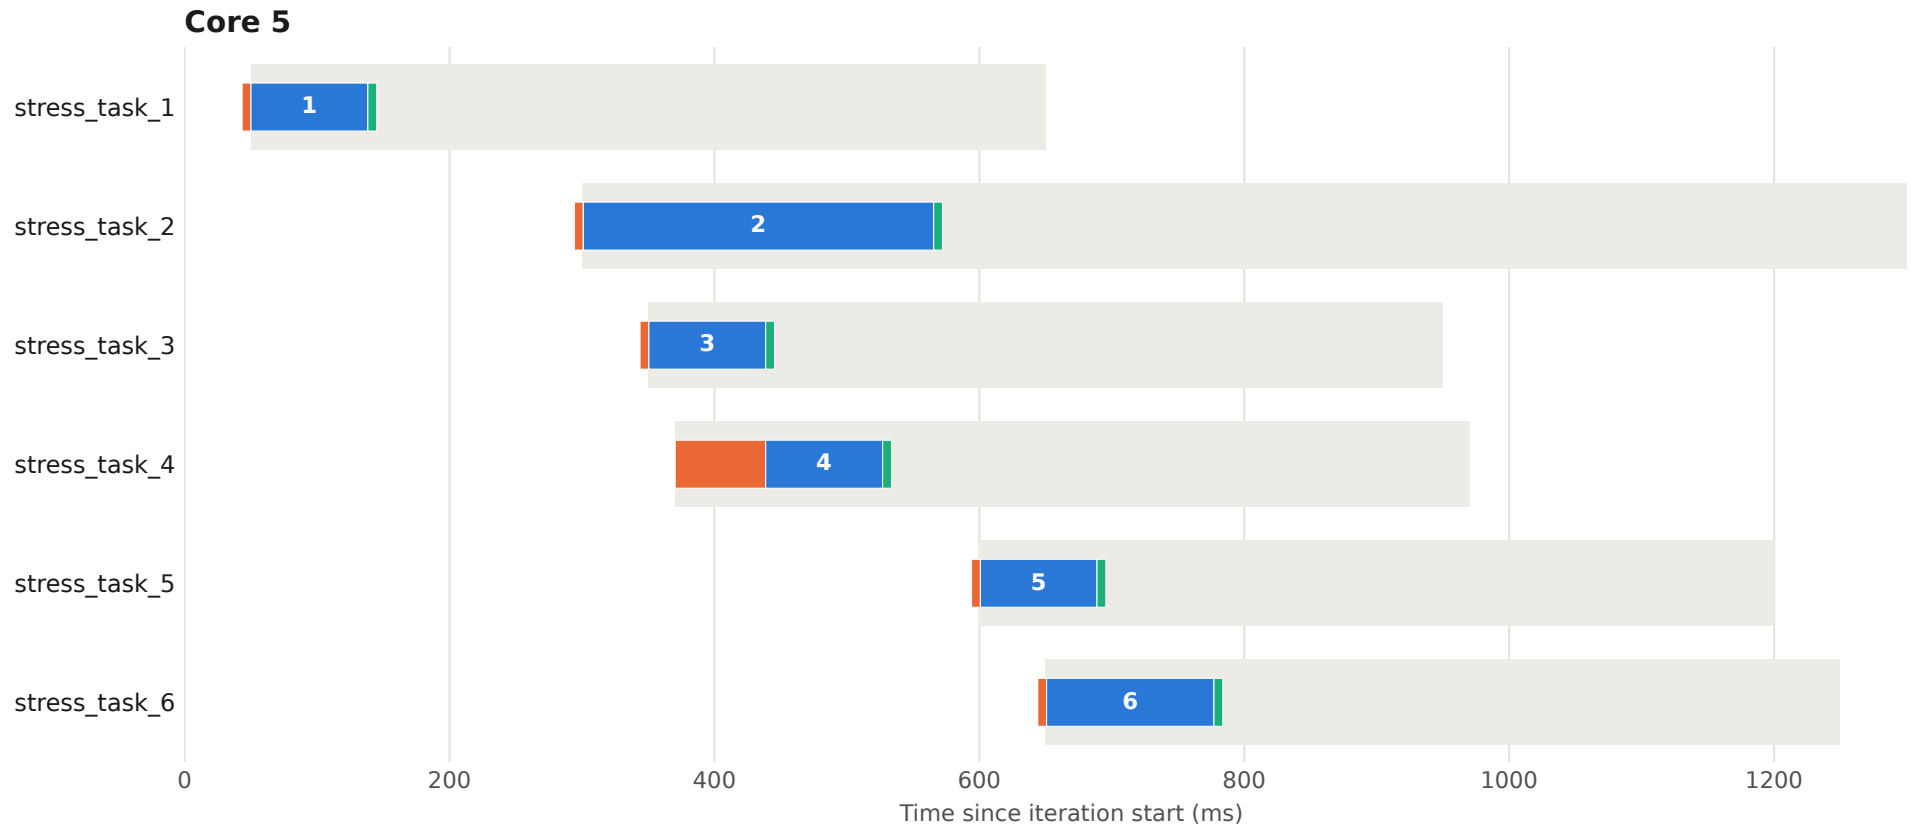


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 10

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

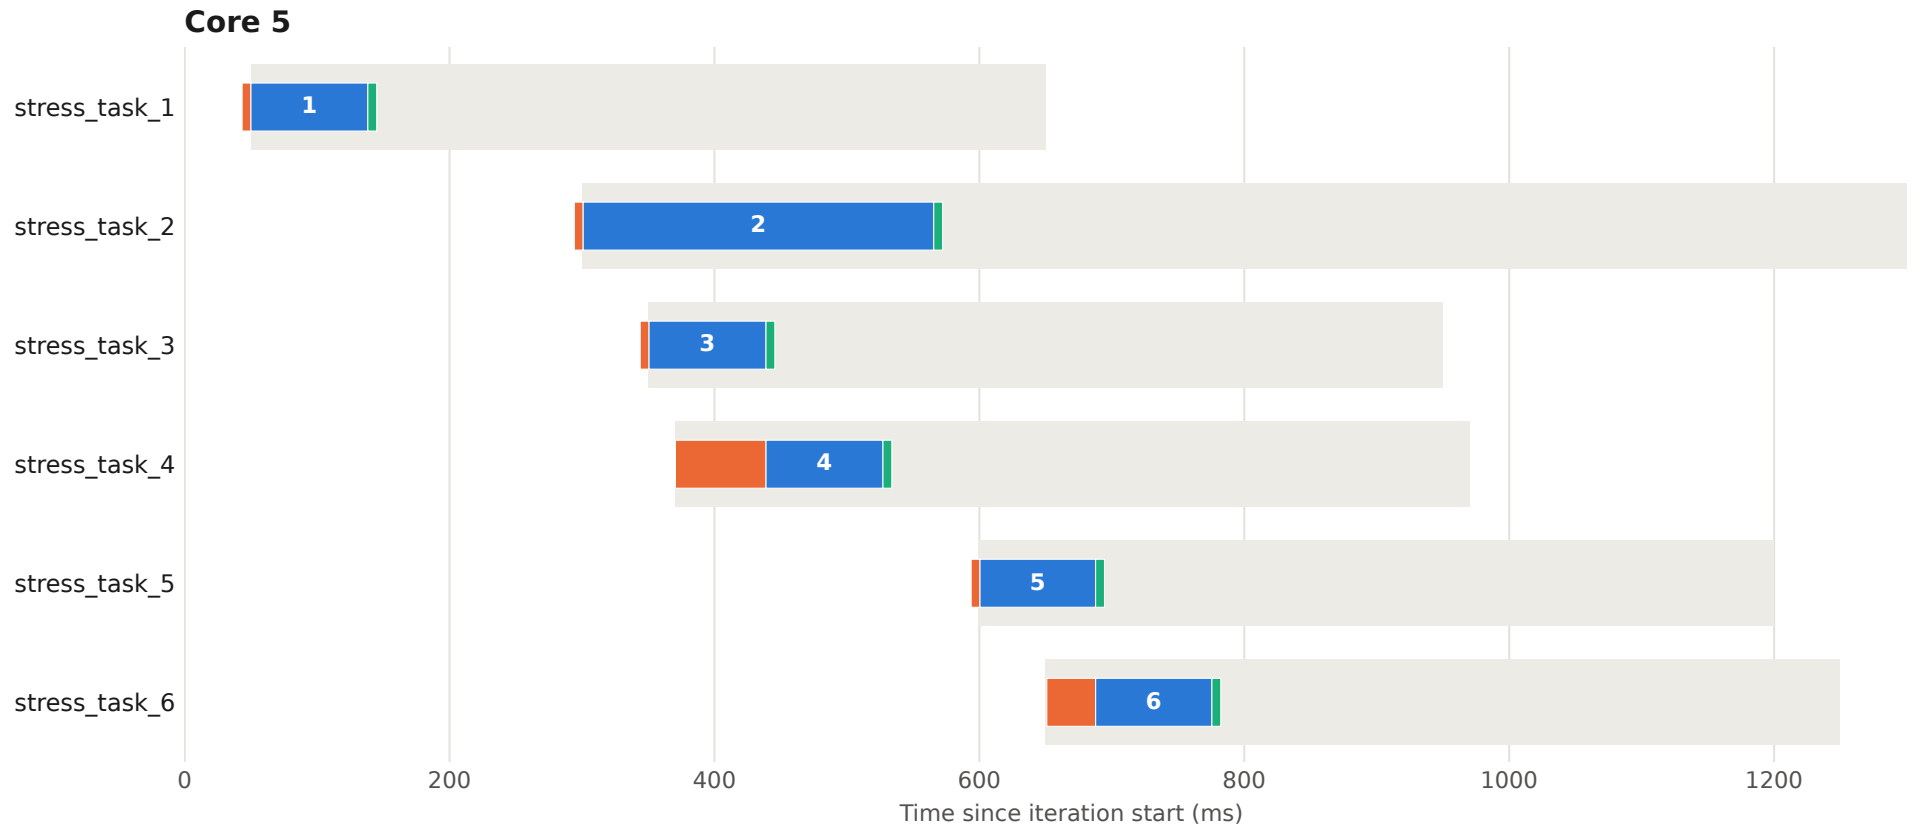


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 11

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

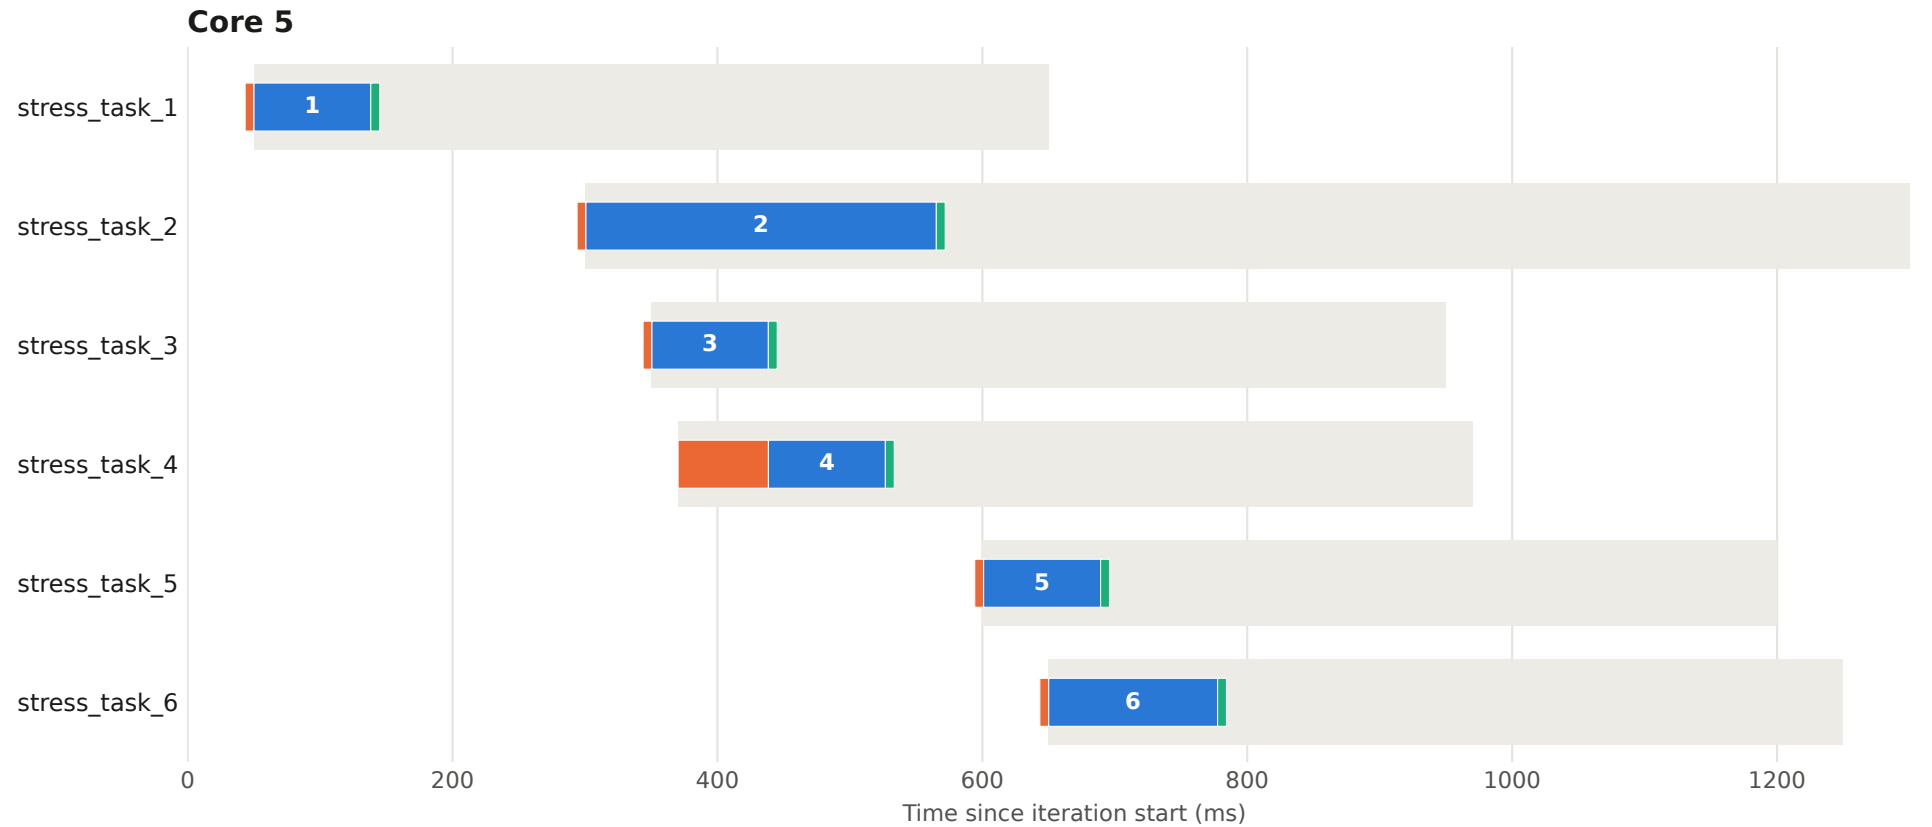


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 12

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

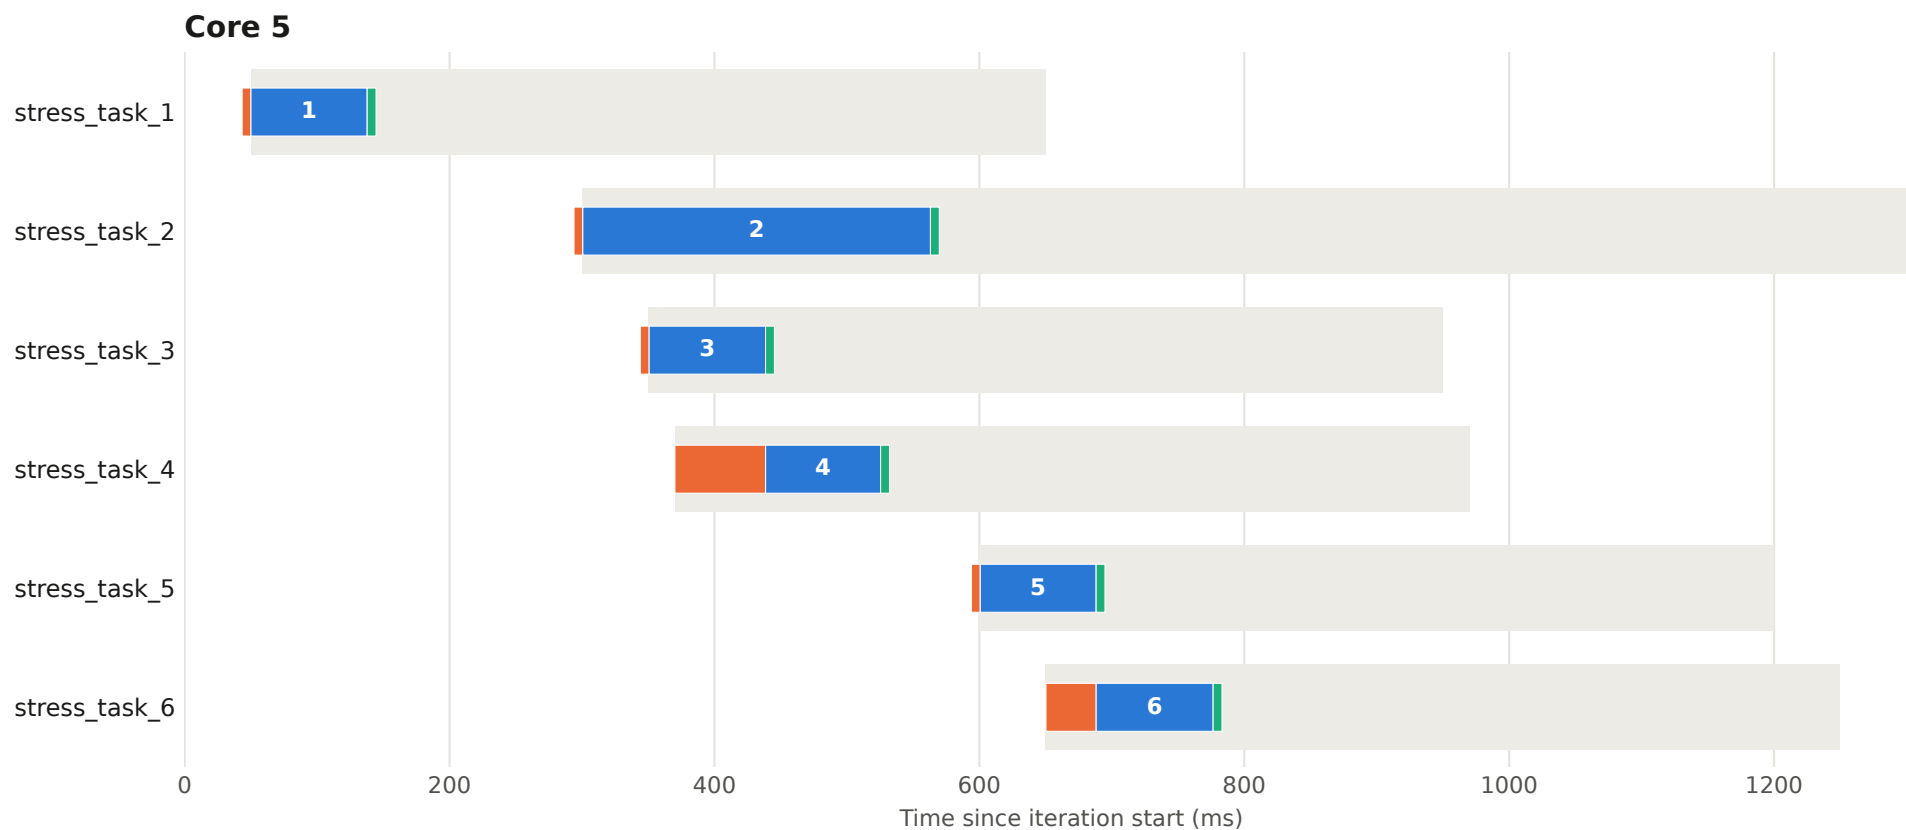


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 13

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

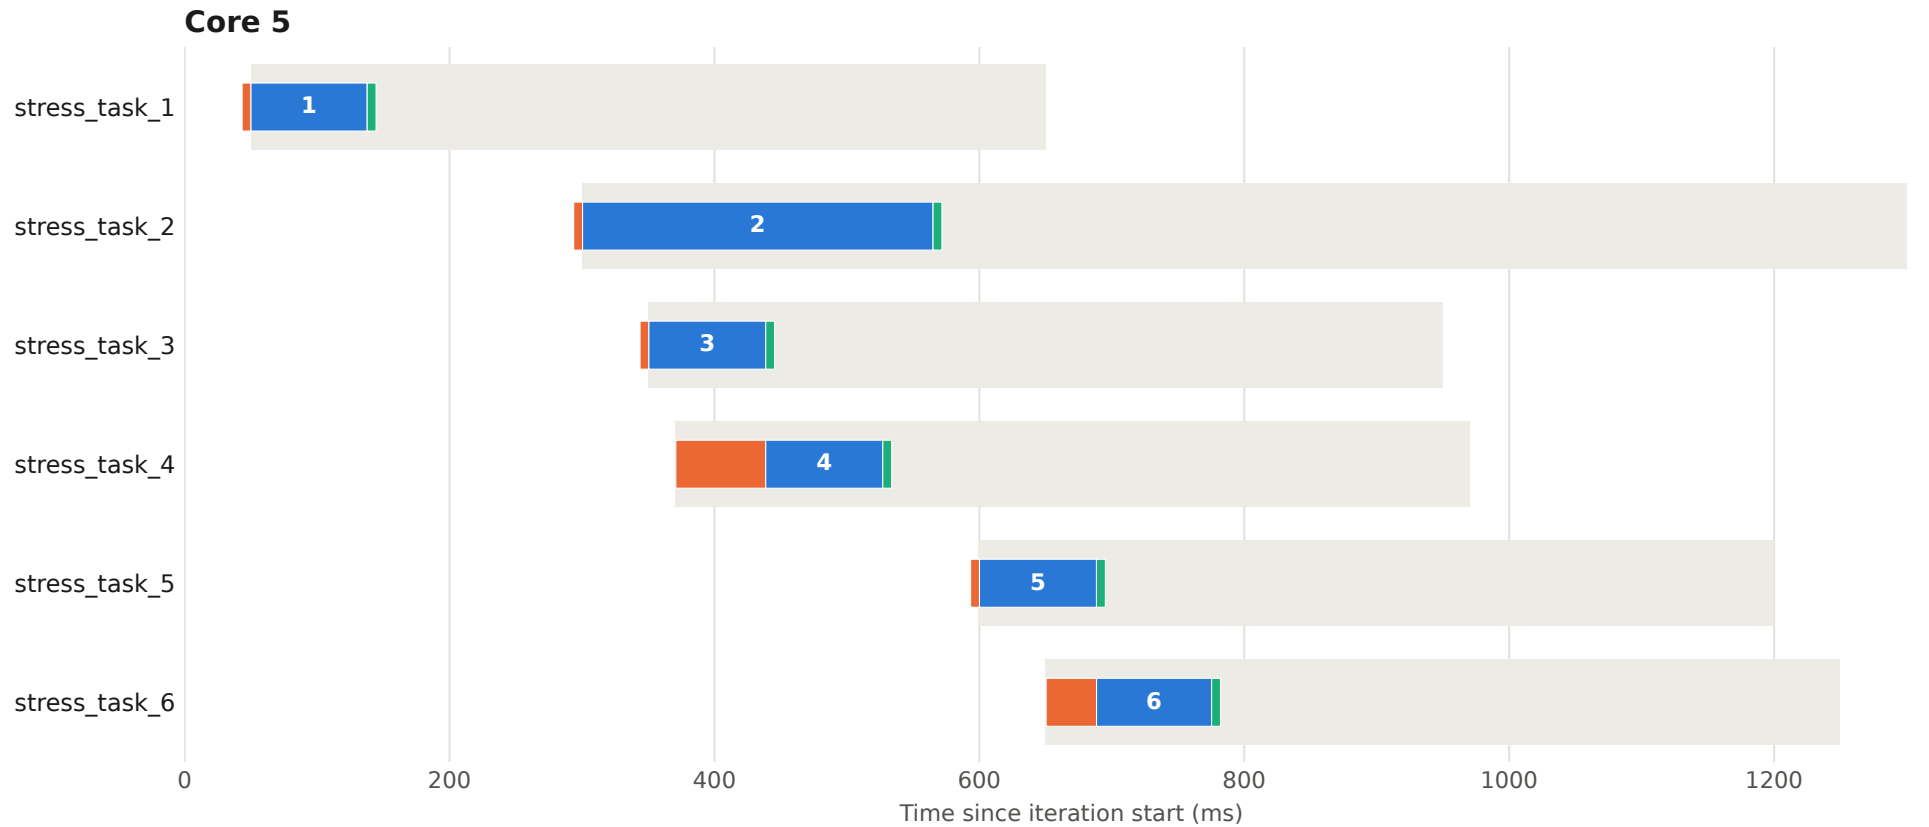


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 14

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

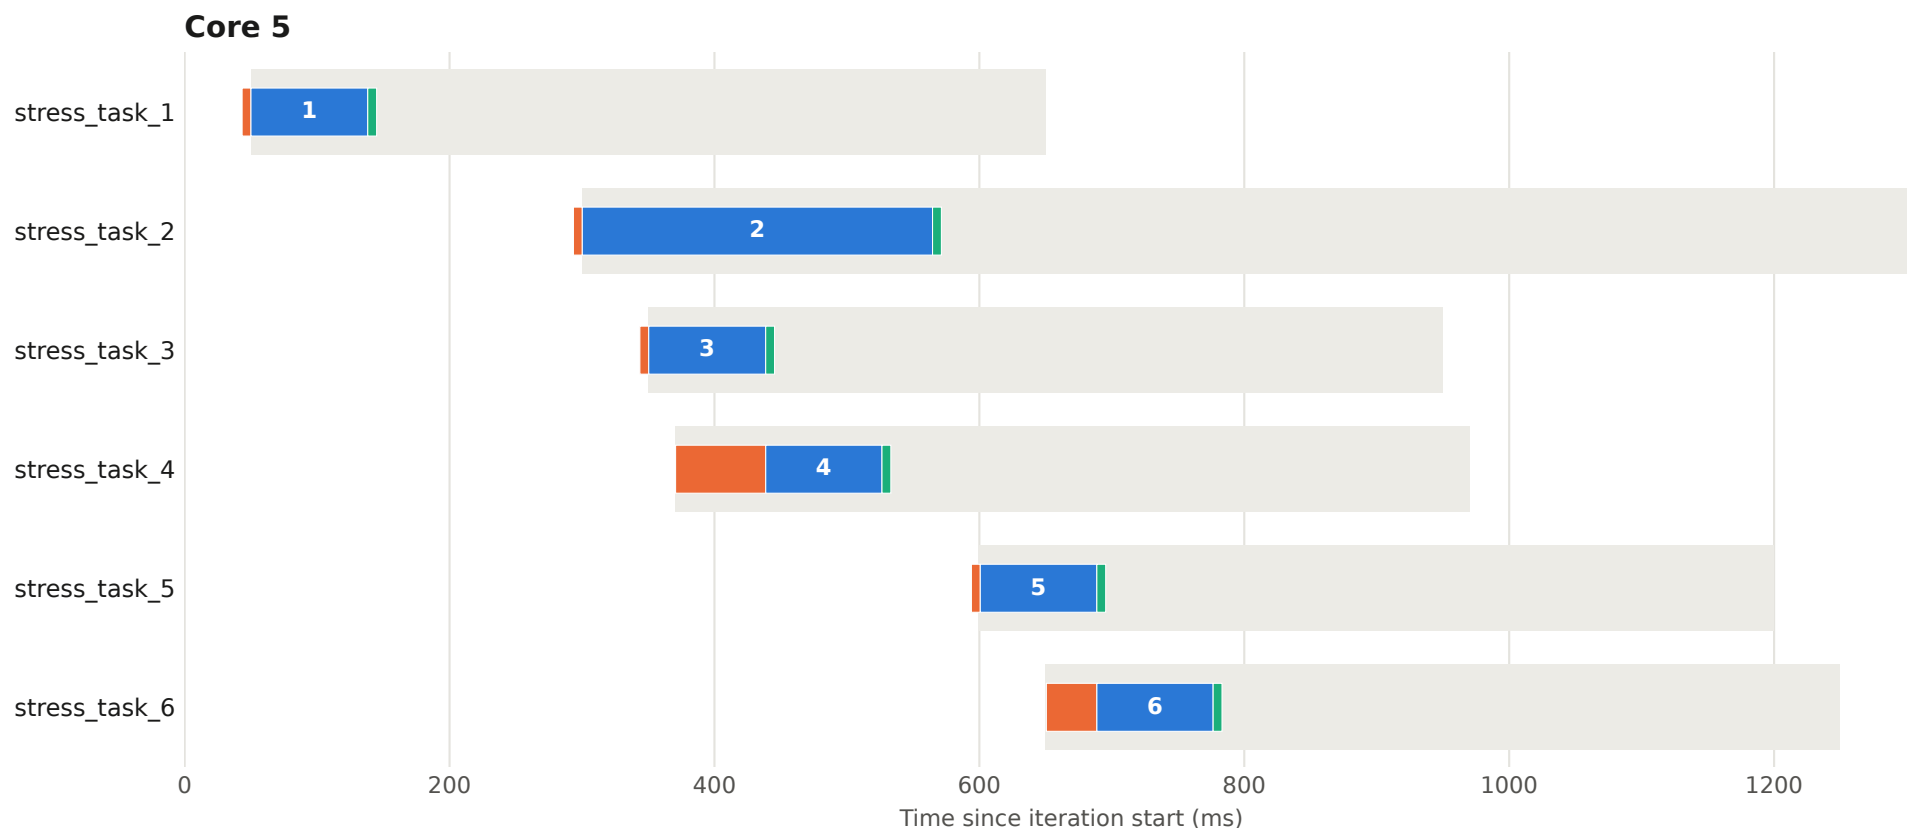


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 15

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

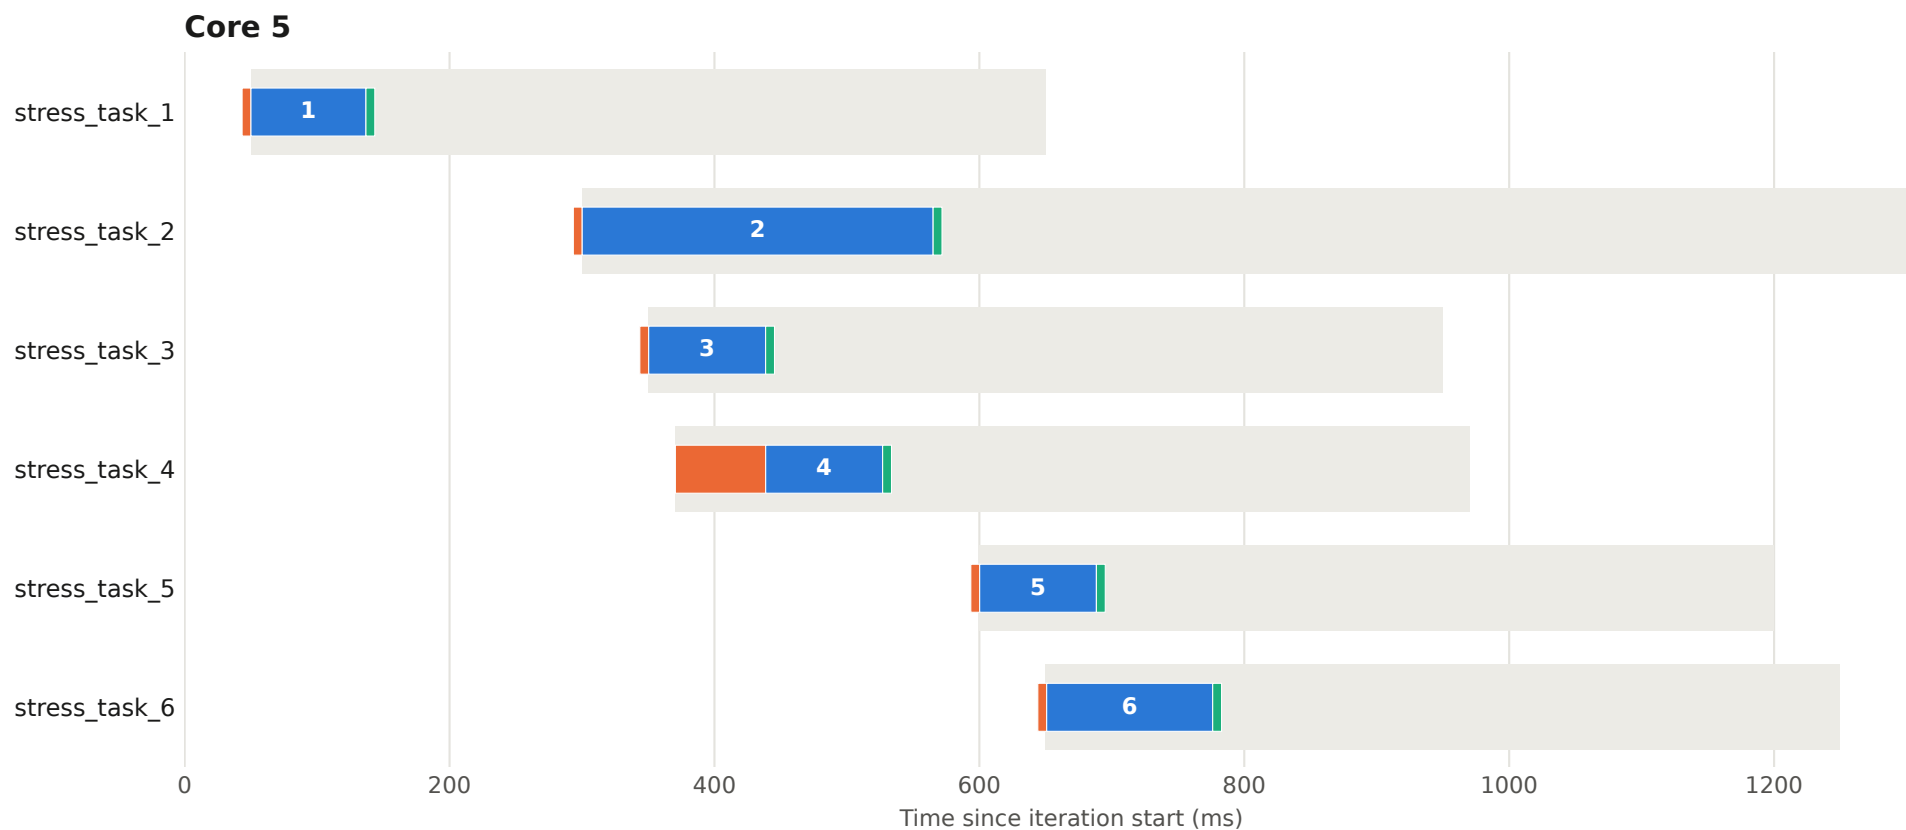


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 16

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

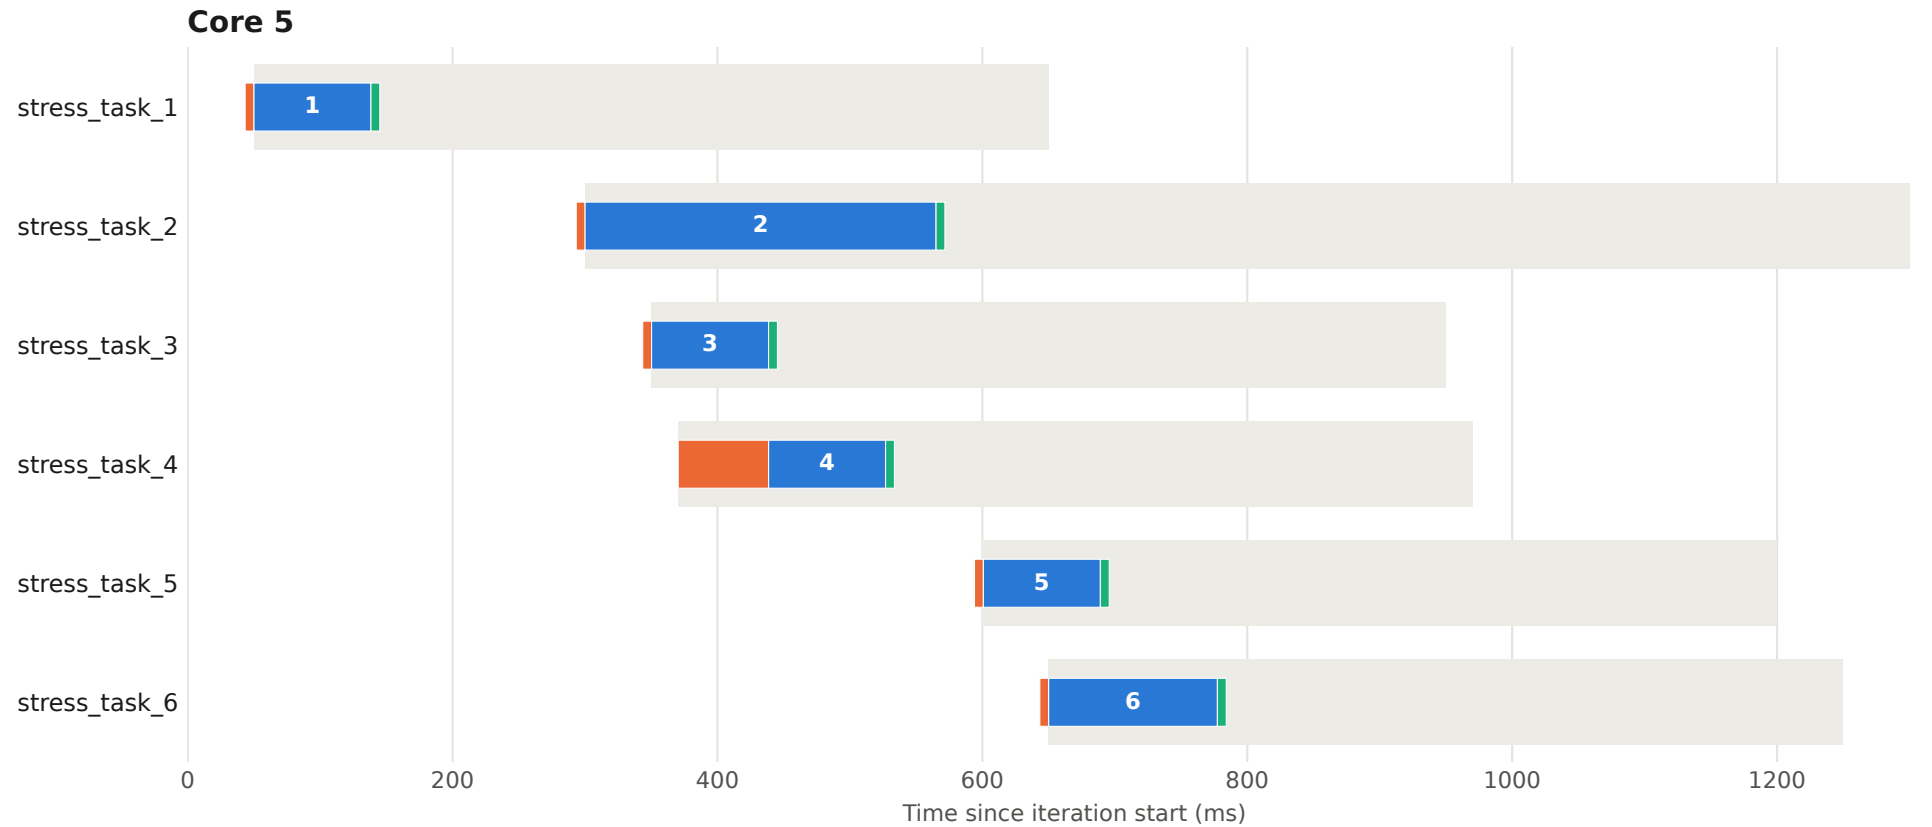


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 17

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

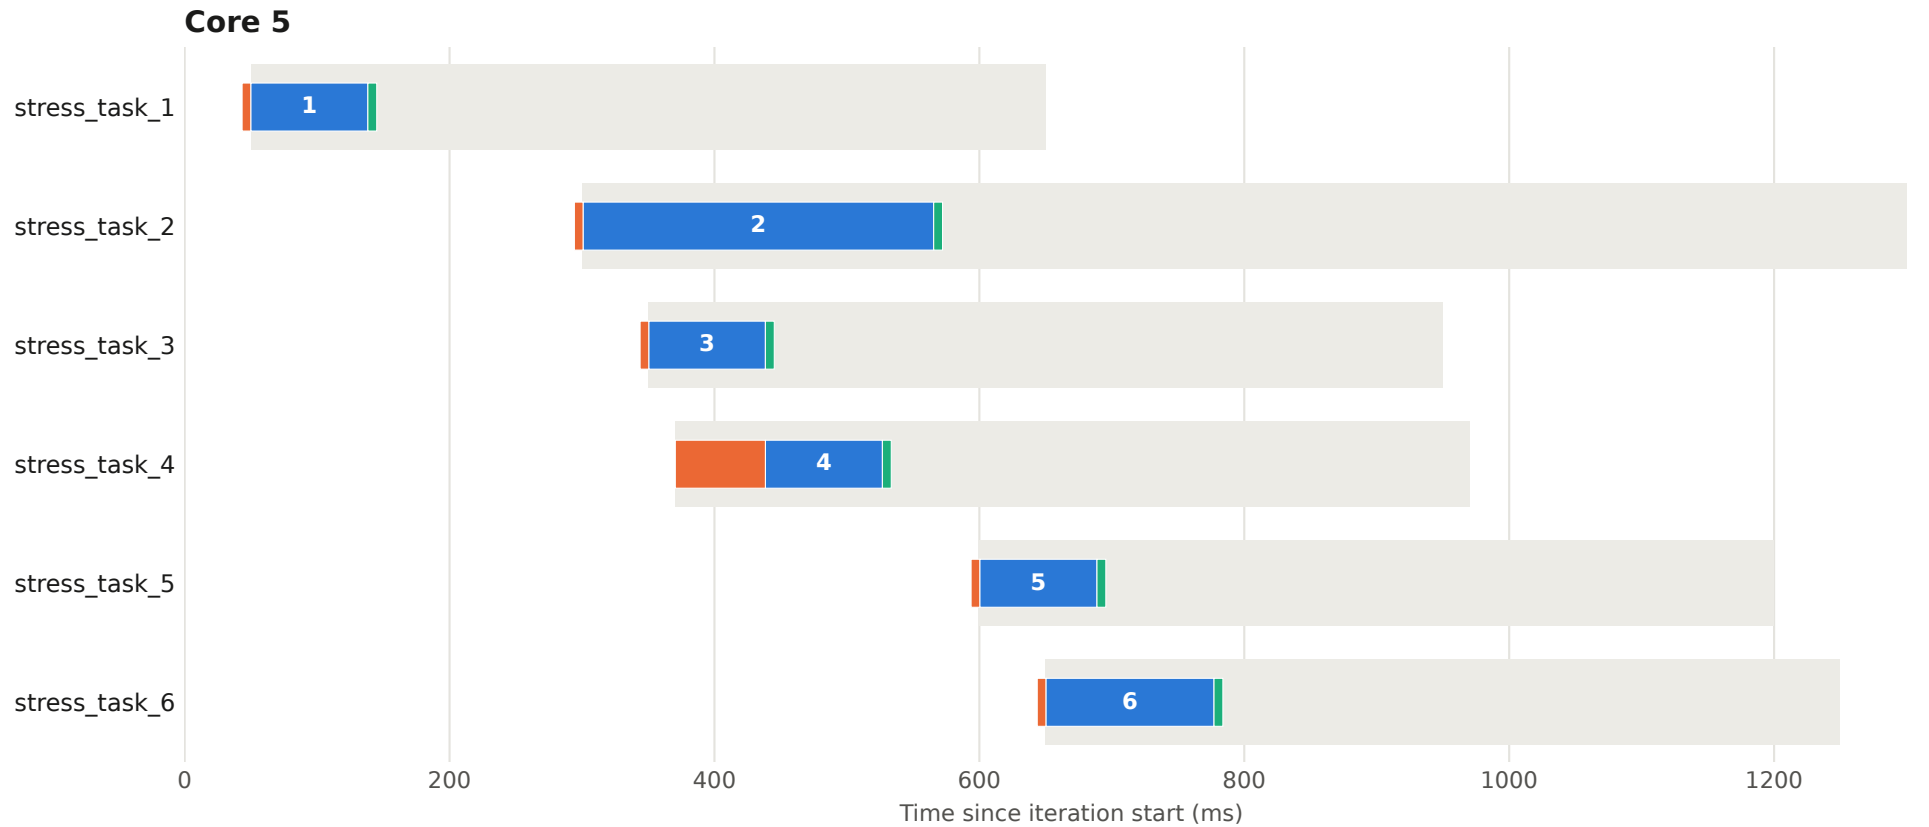


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 18

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

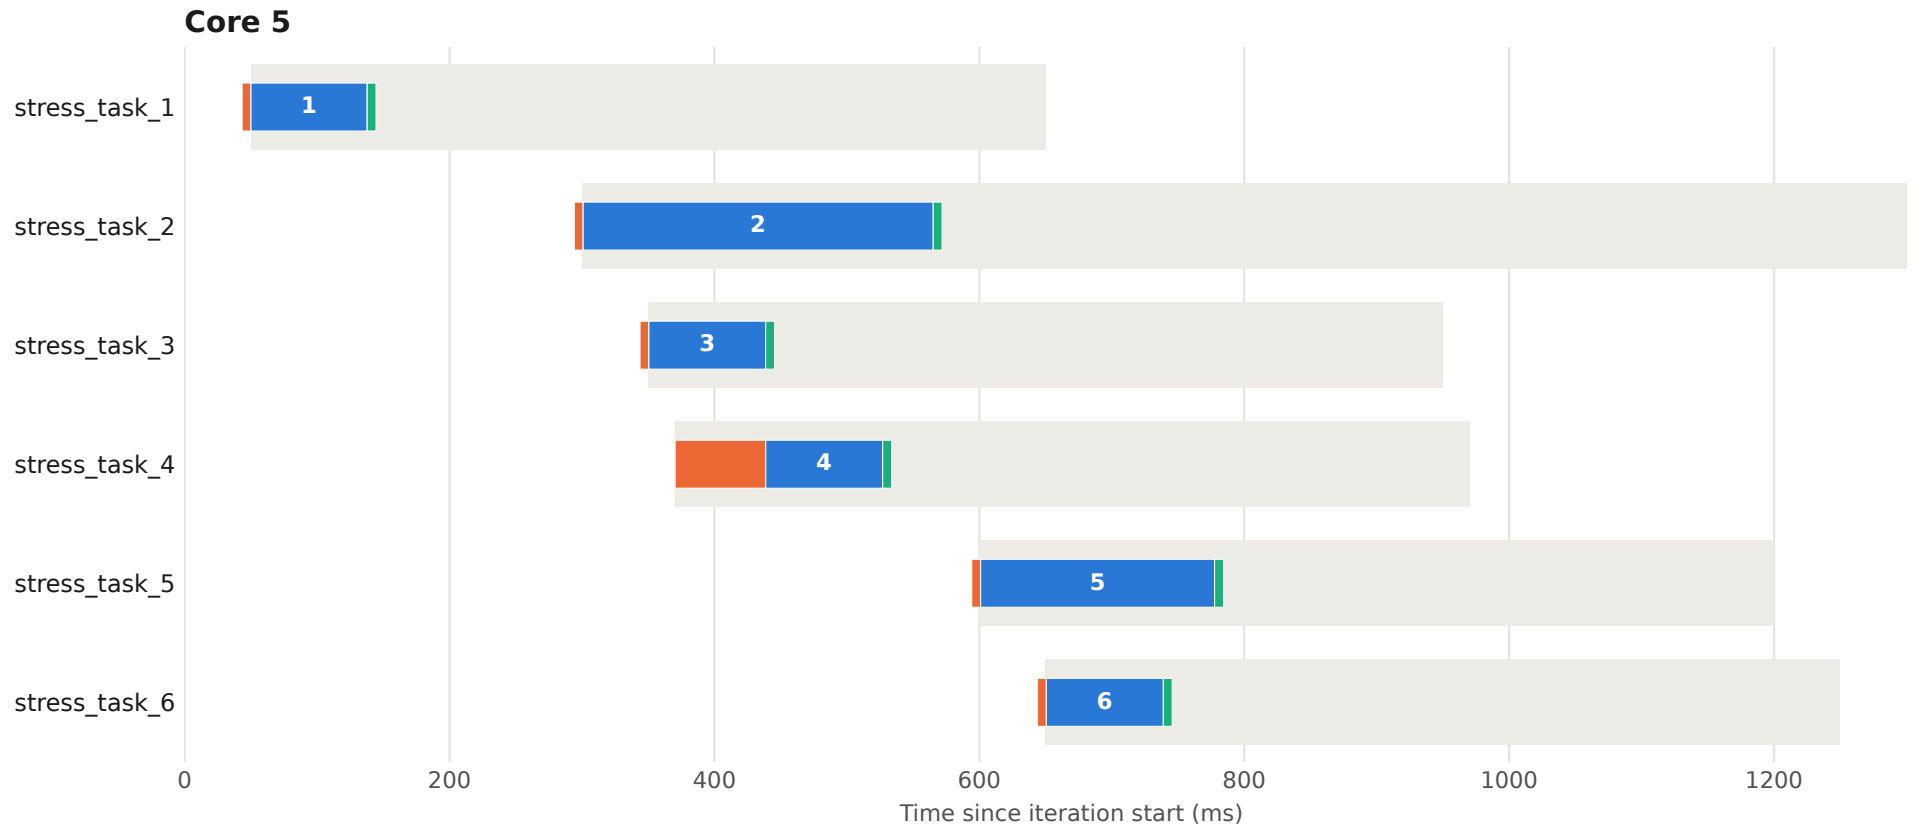


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 19

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

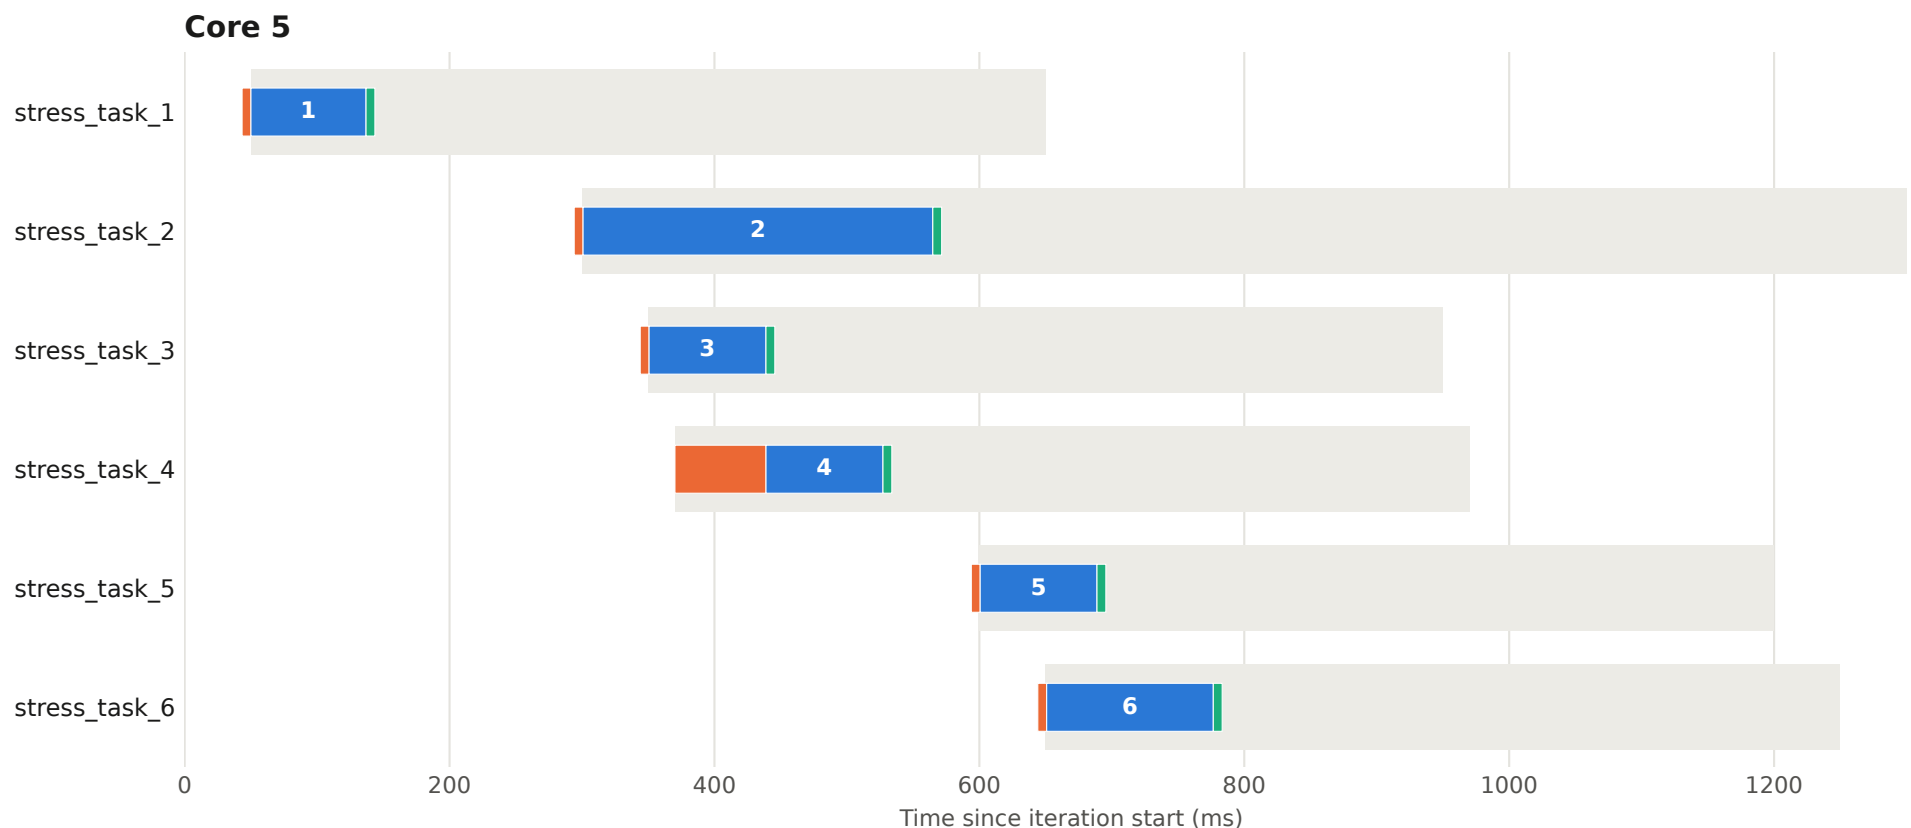


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 20

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

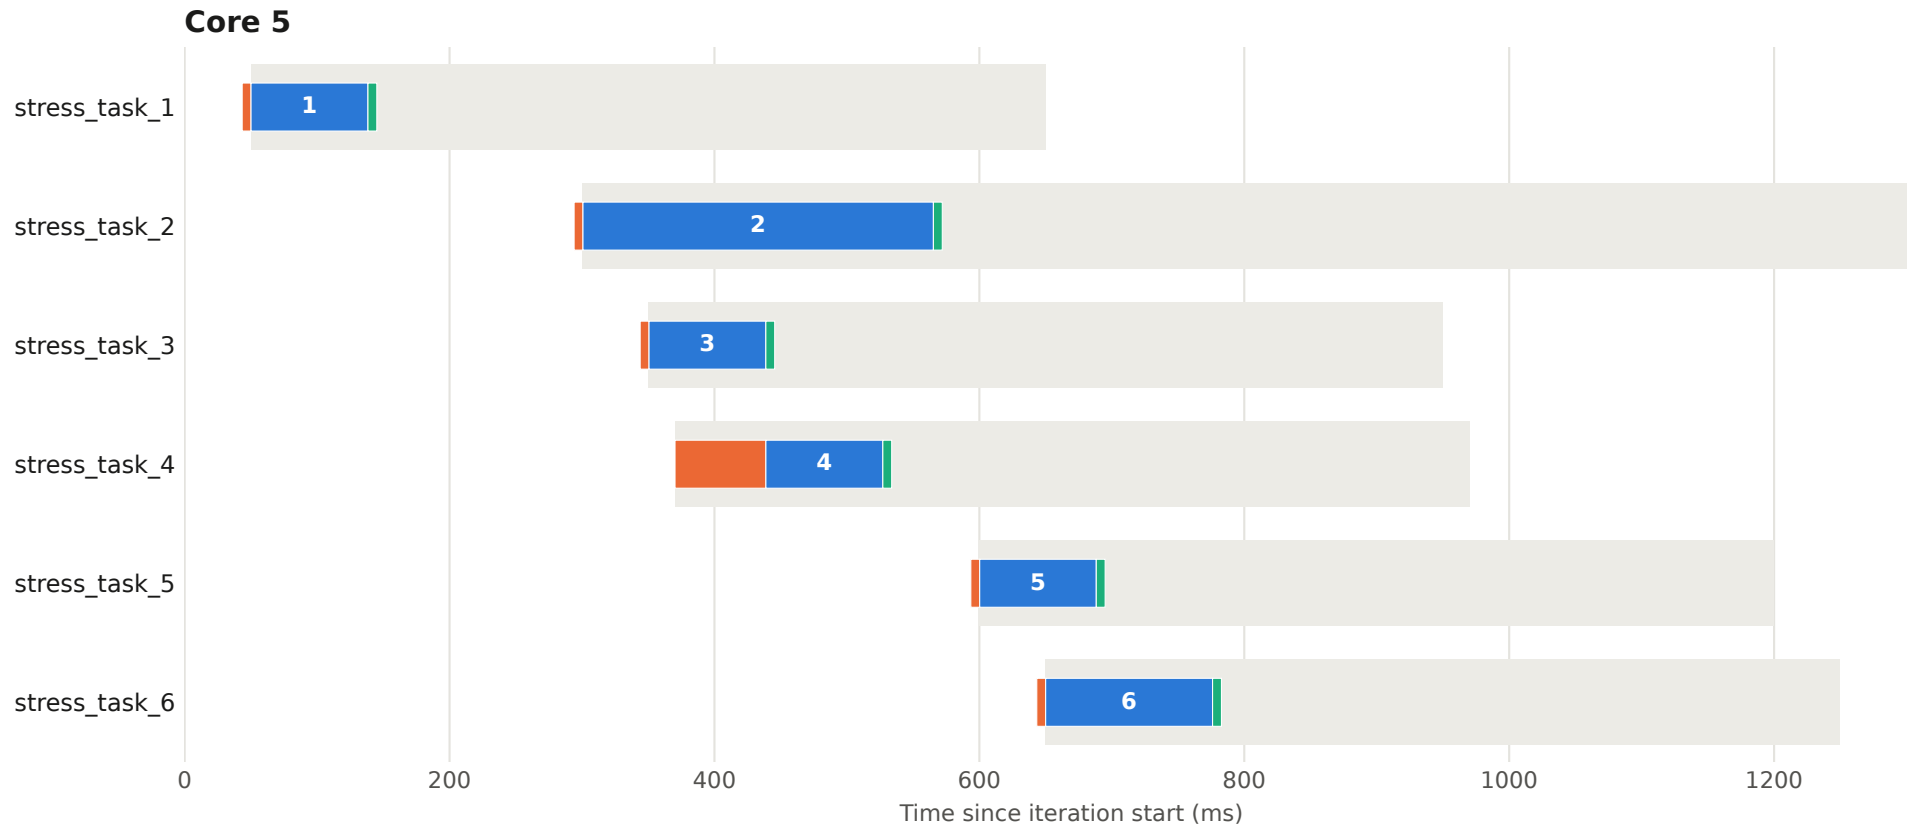


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 21

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

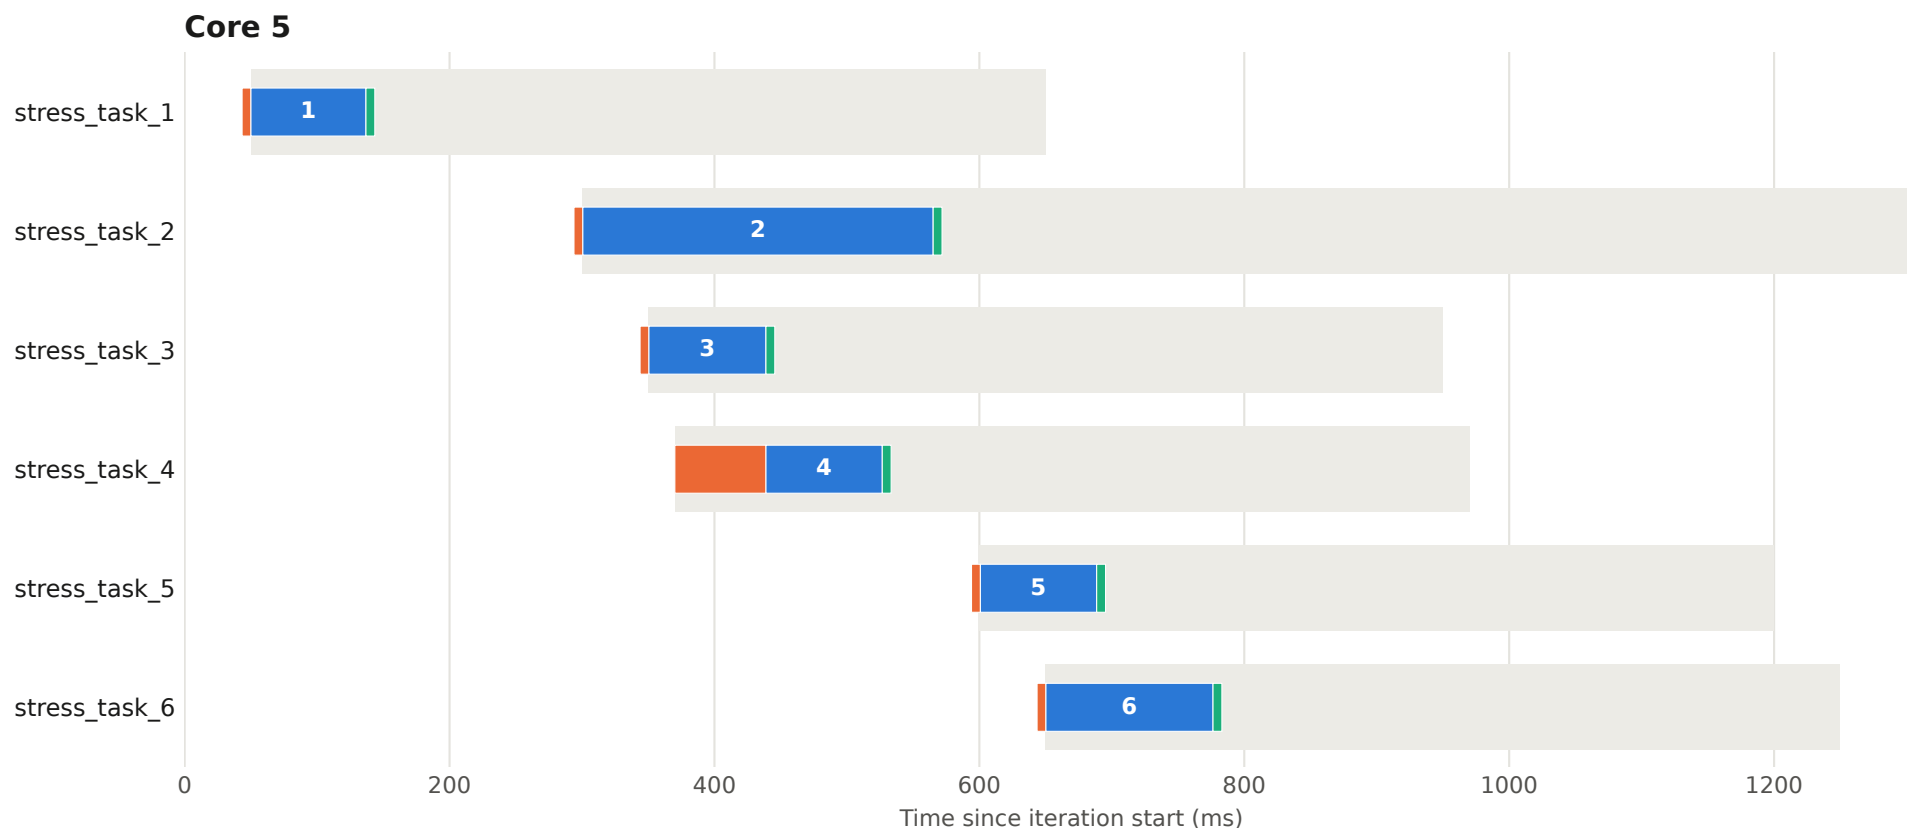


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 22

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

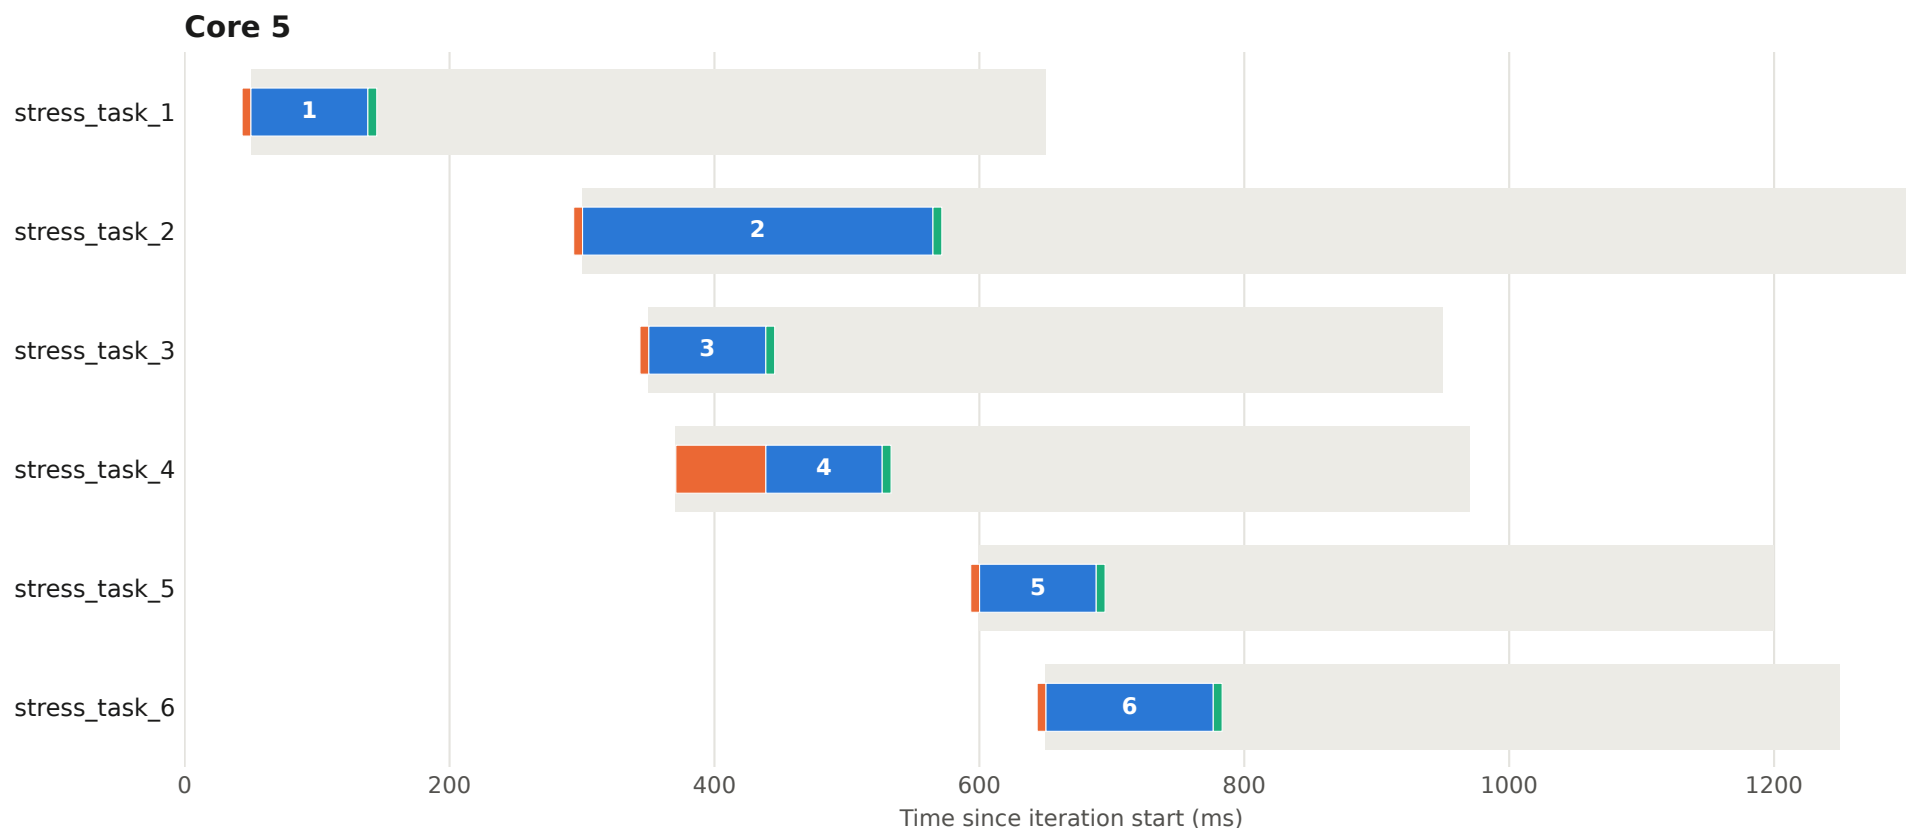


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 23

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

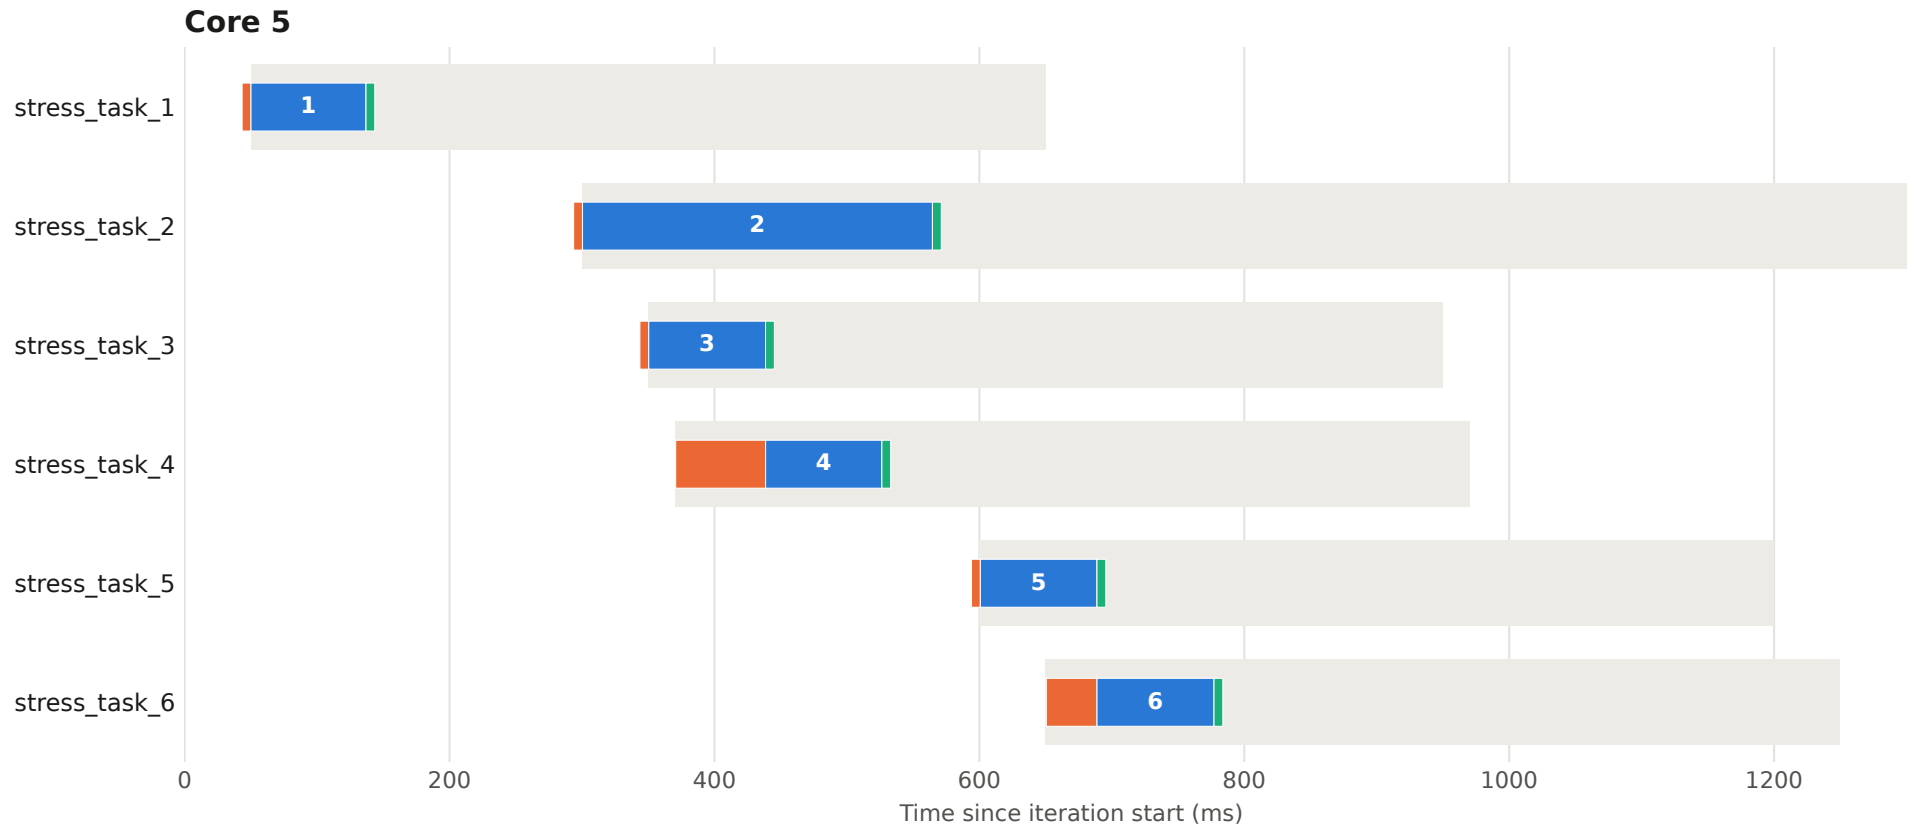


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 24

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

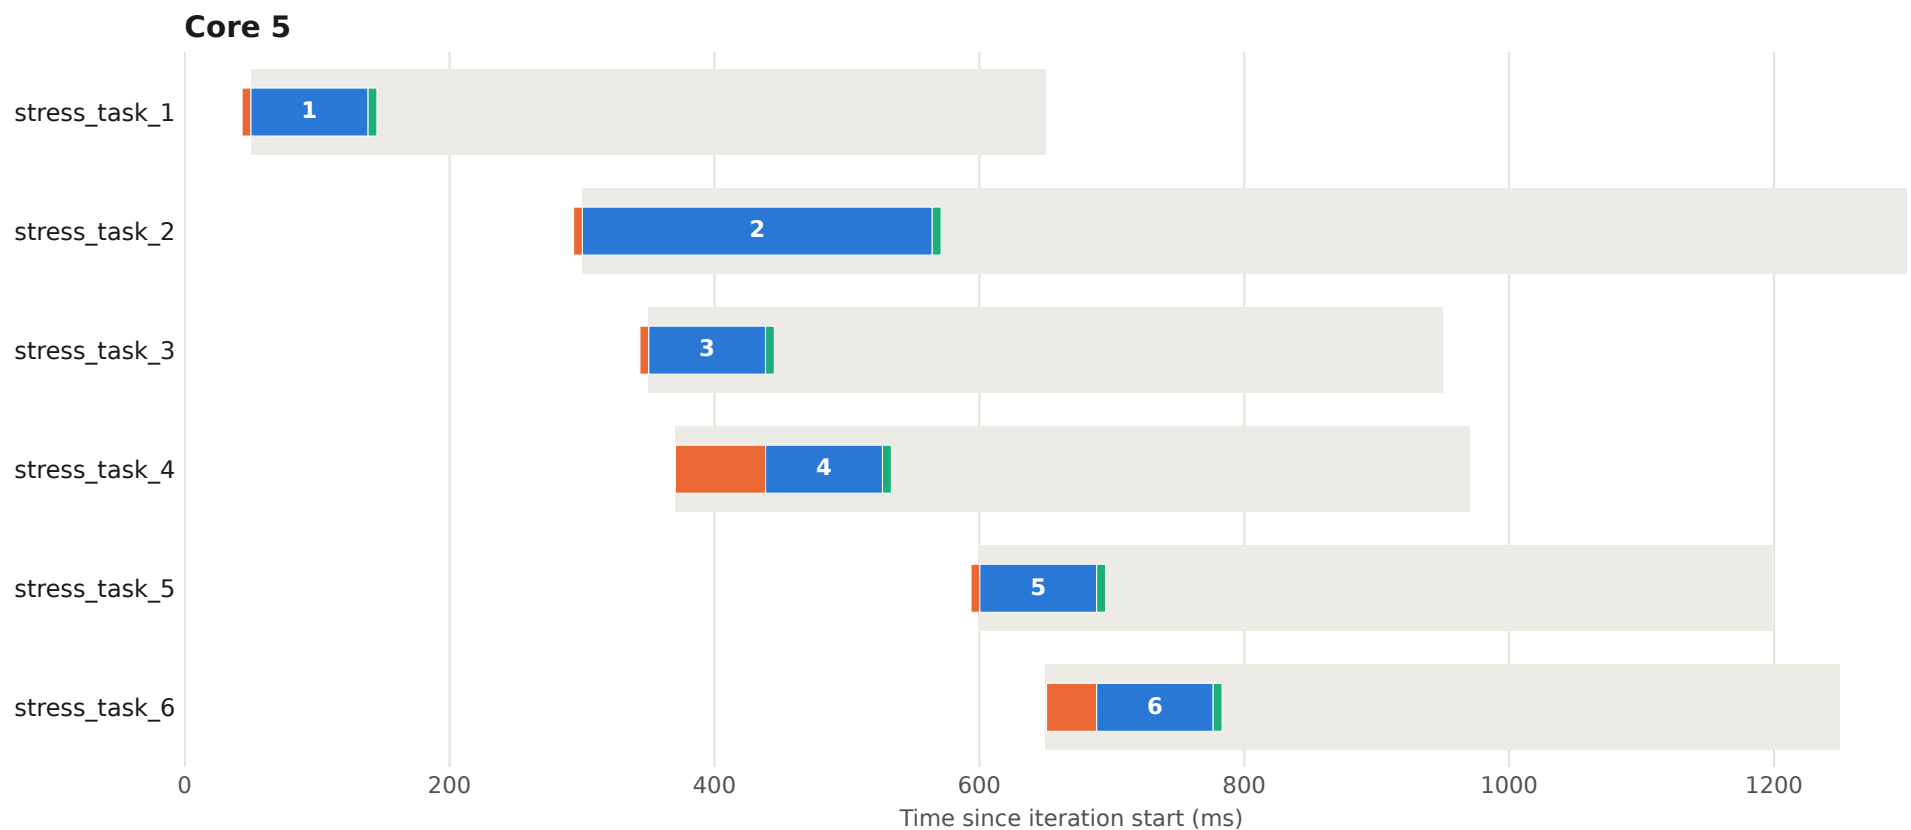


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 25

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

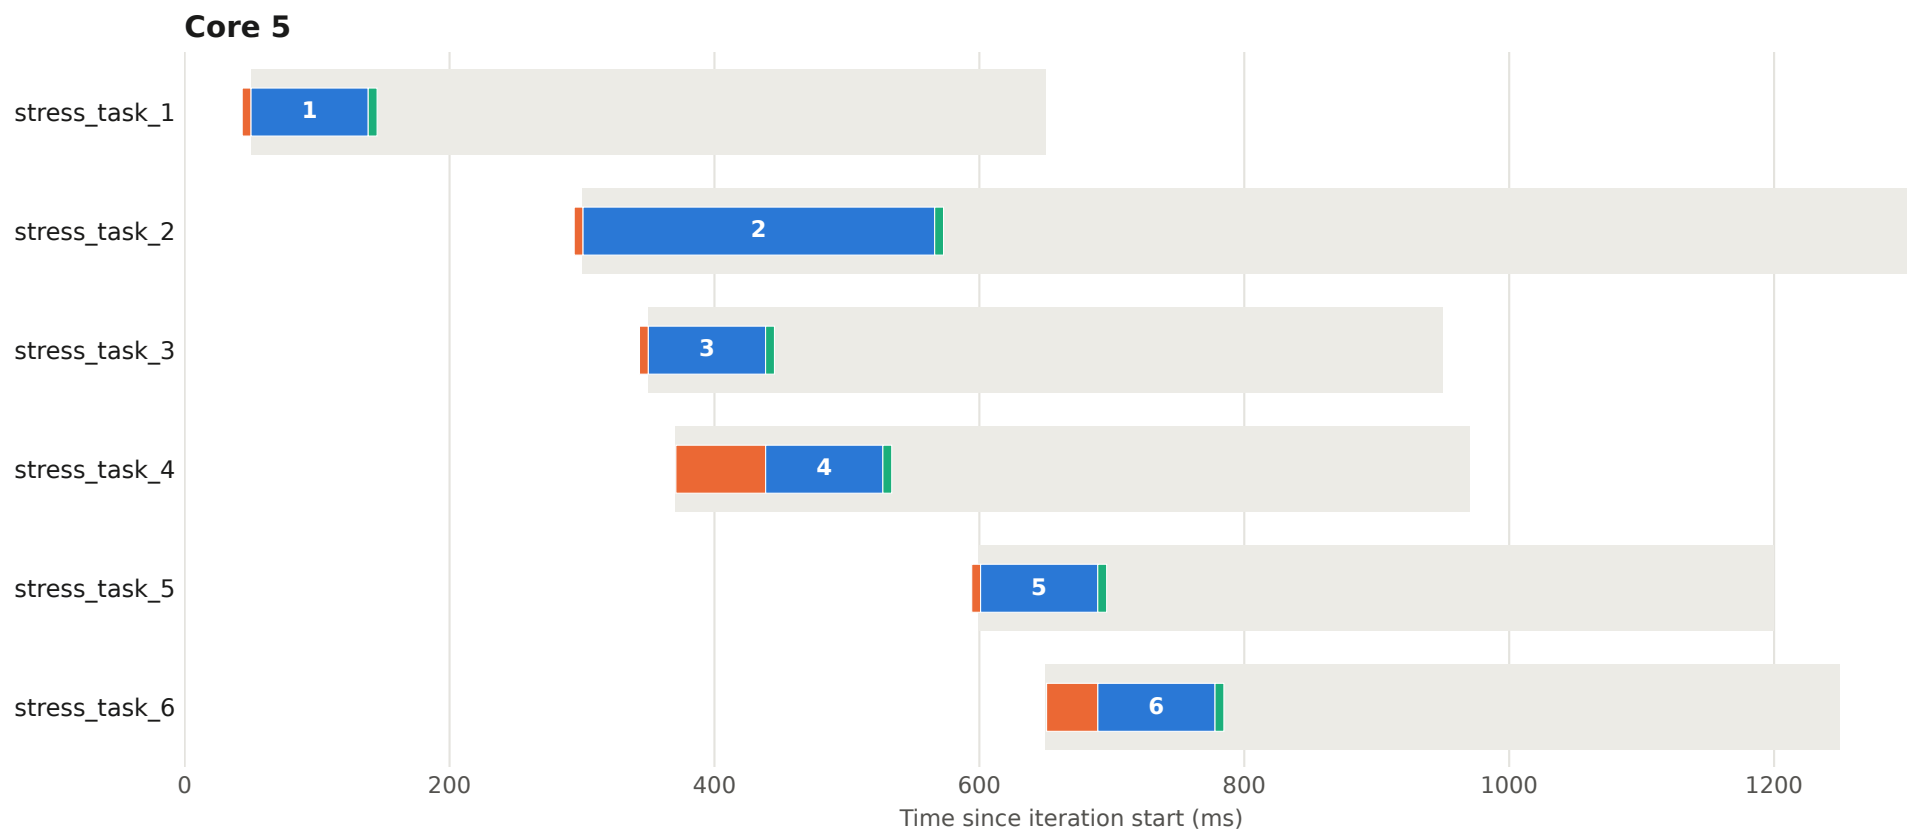


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 26

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

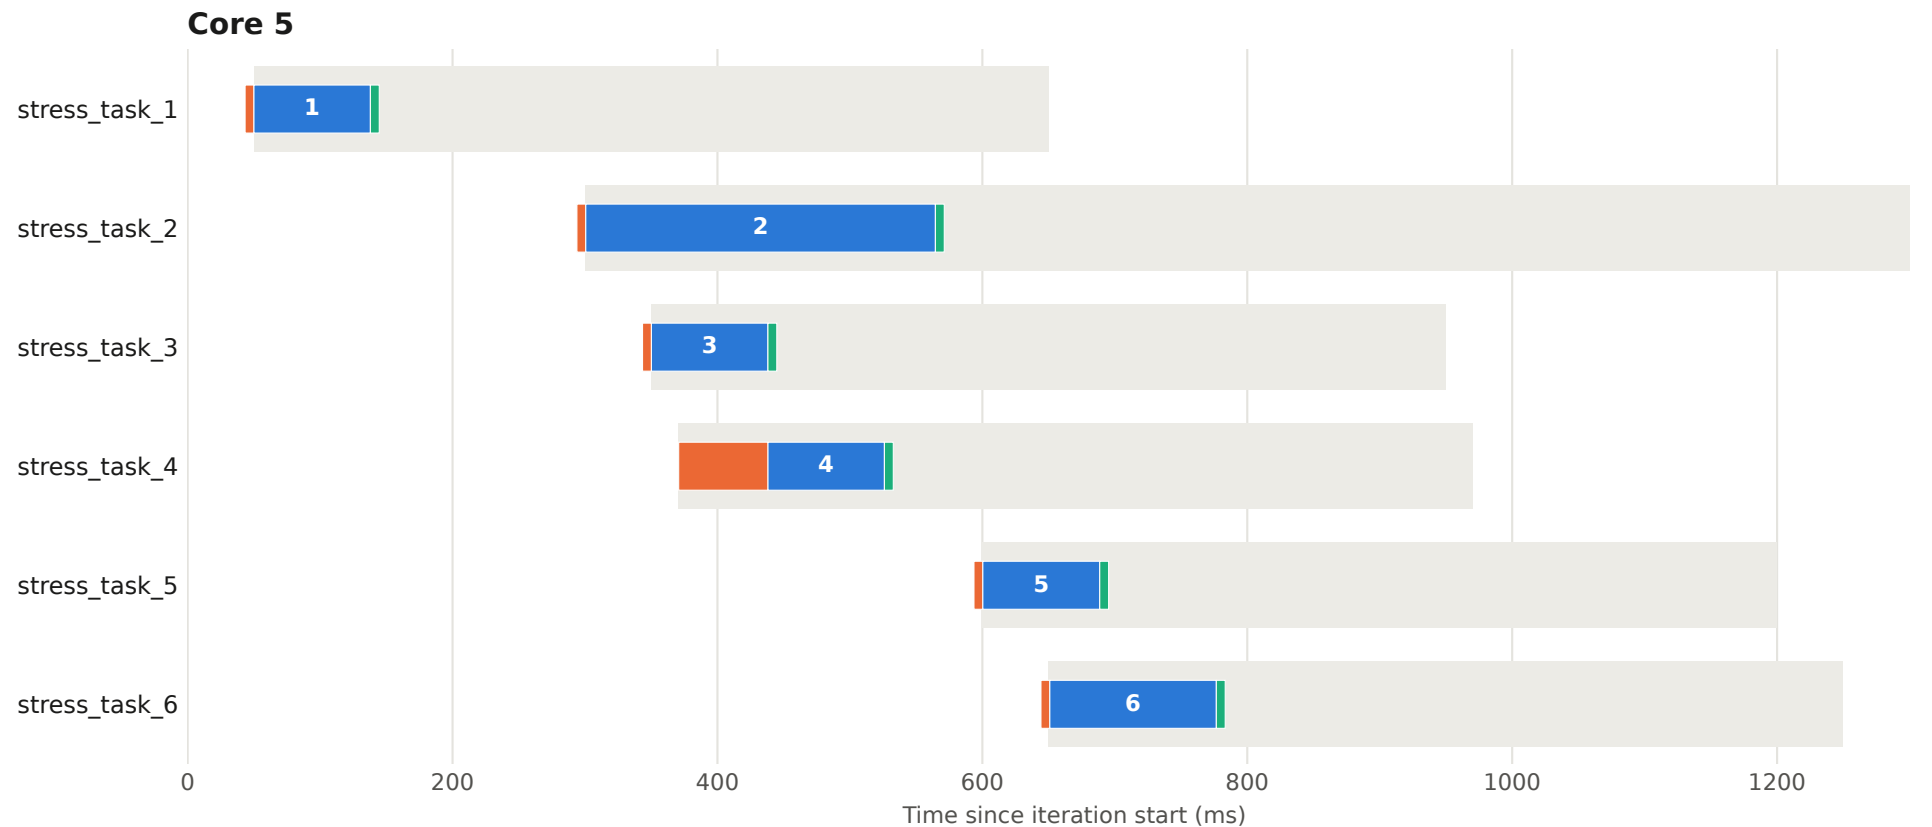


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 27

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

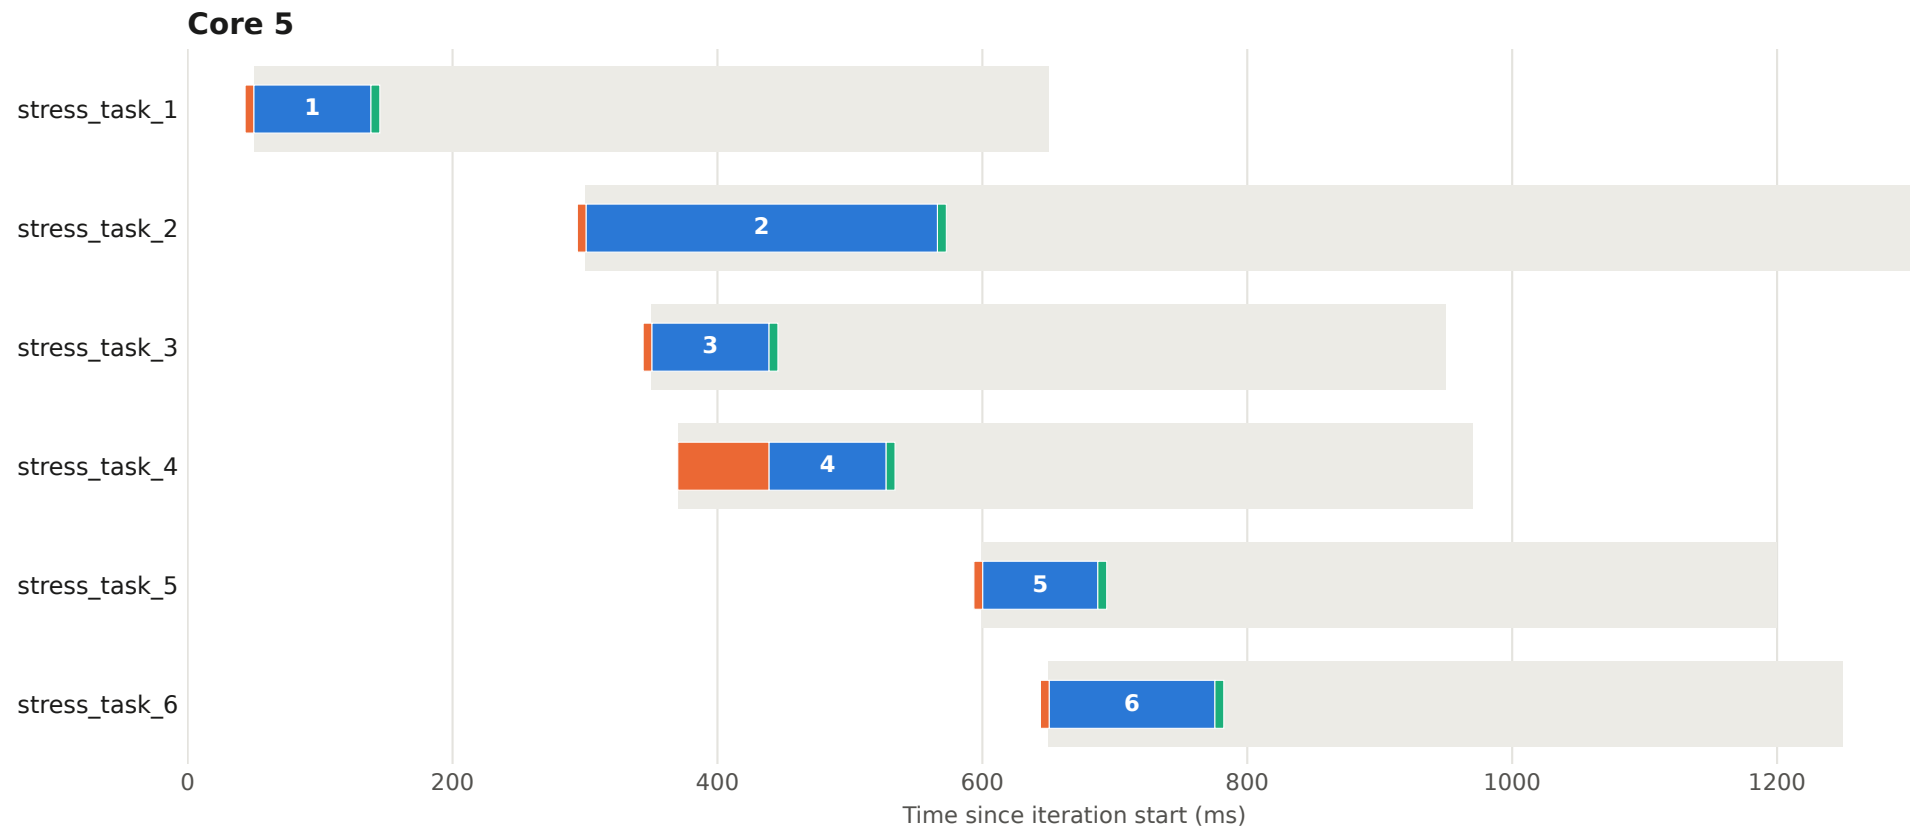


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 28

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

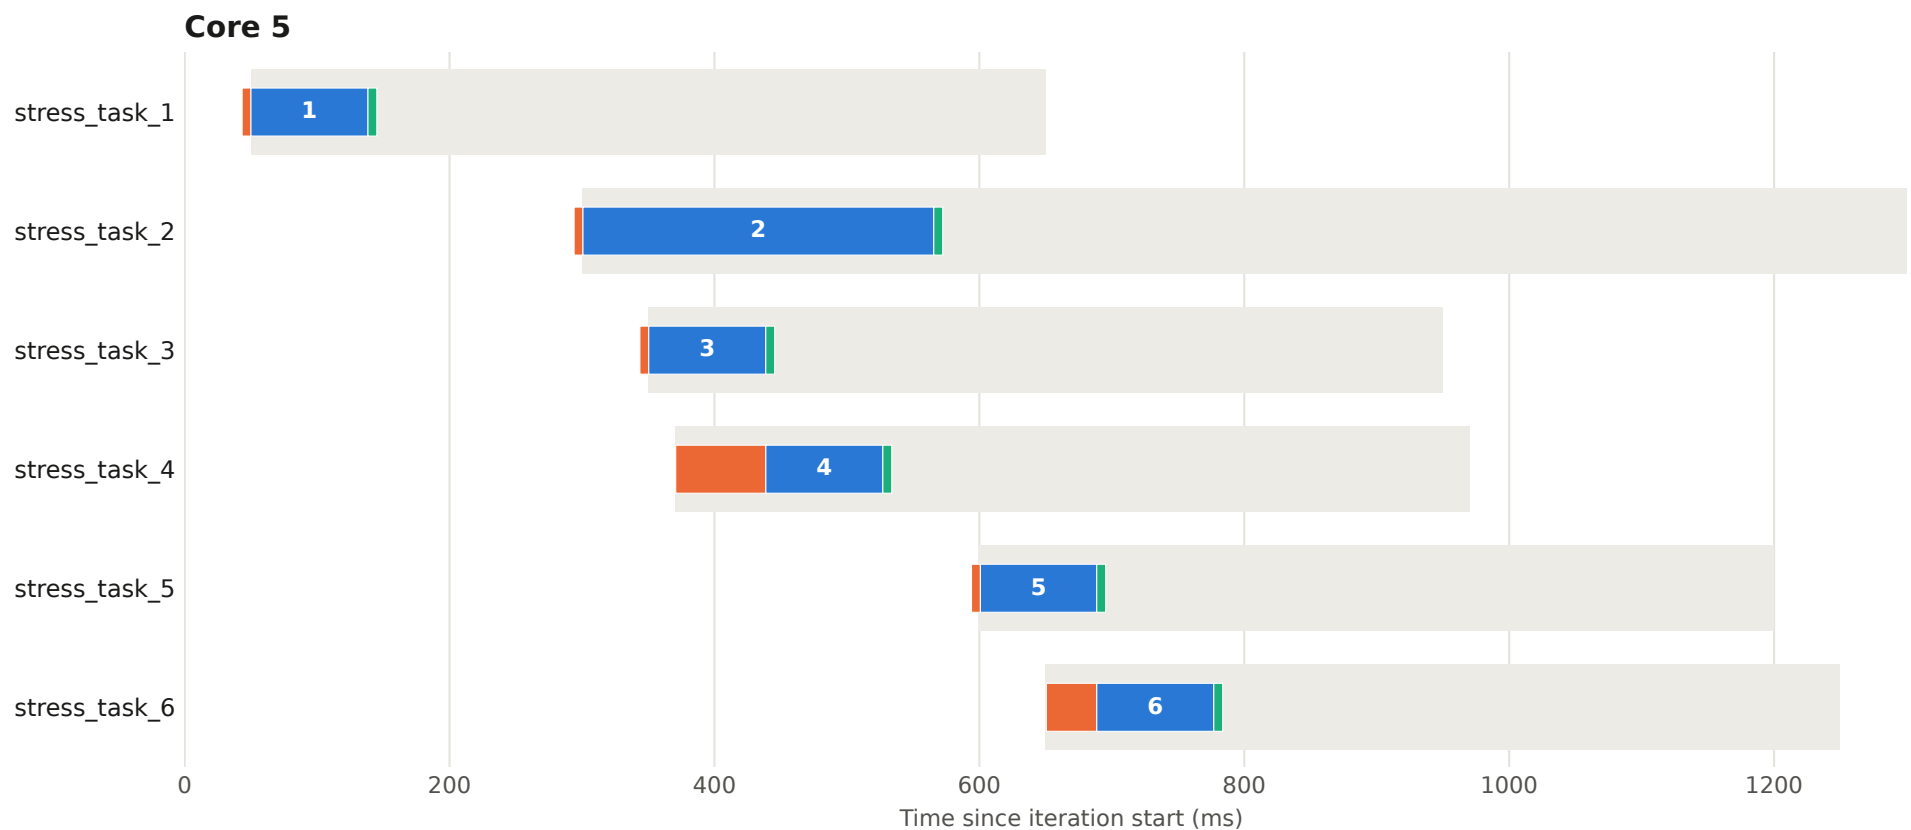


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 29

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

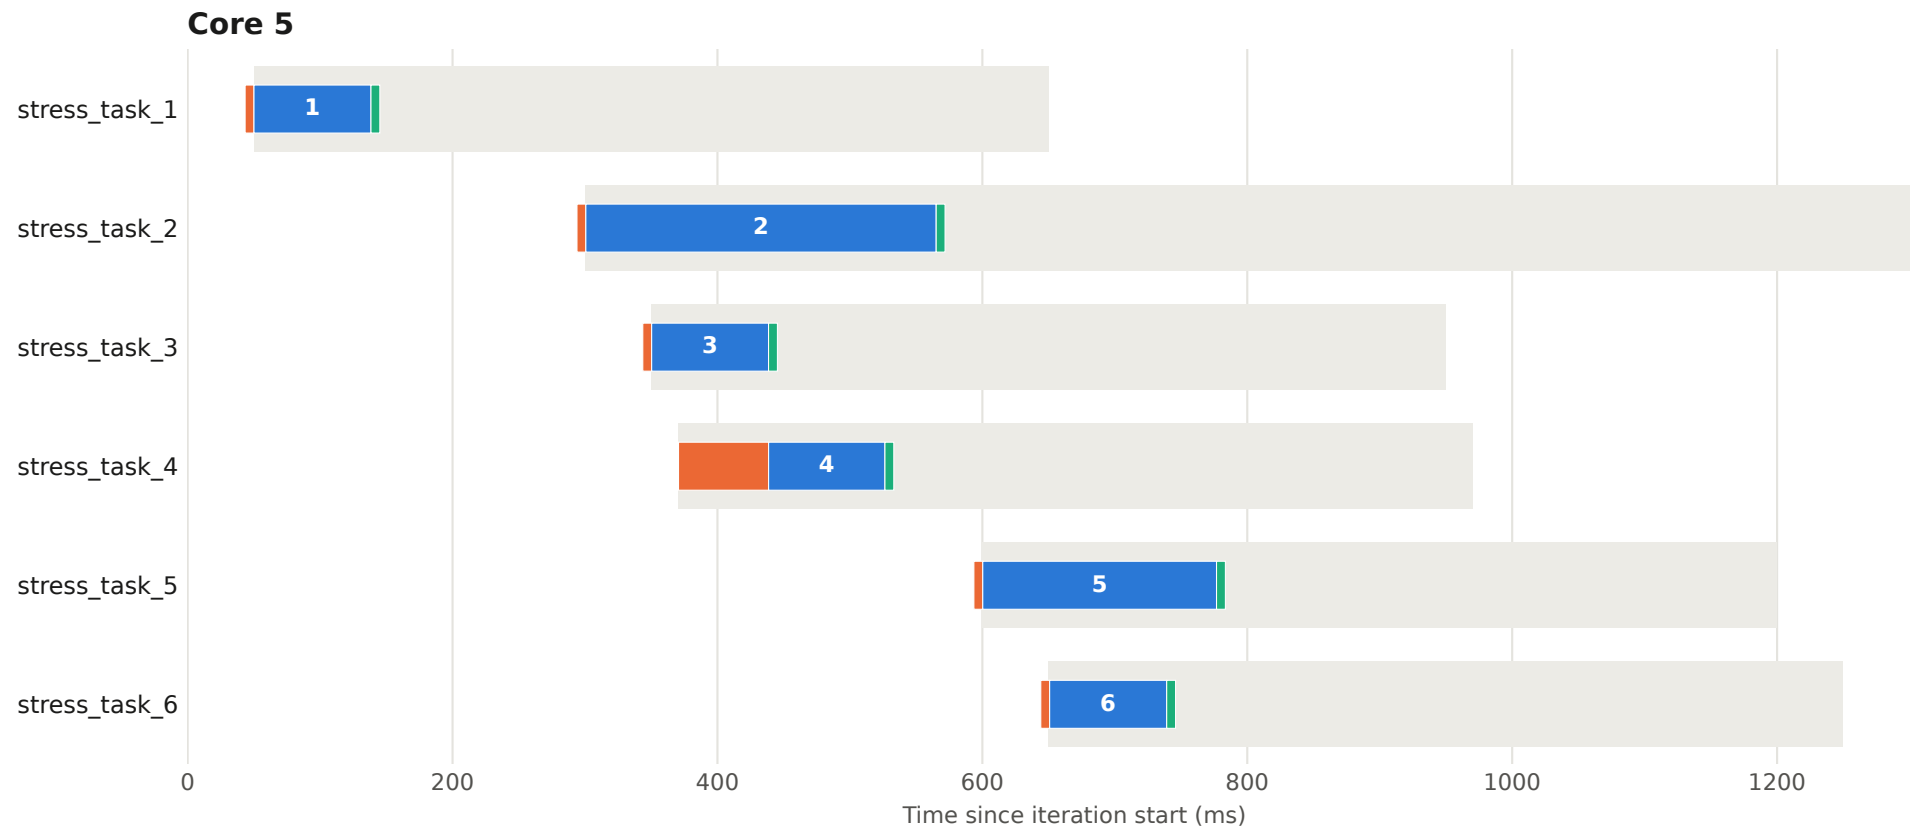


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 30

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

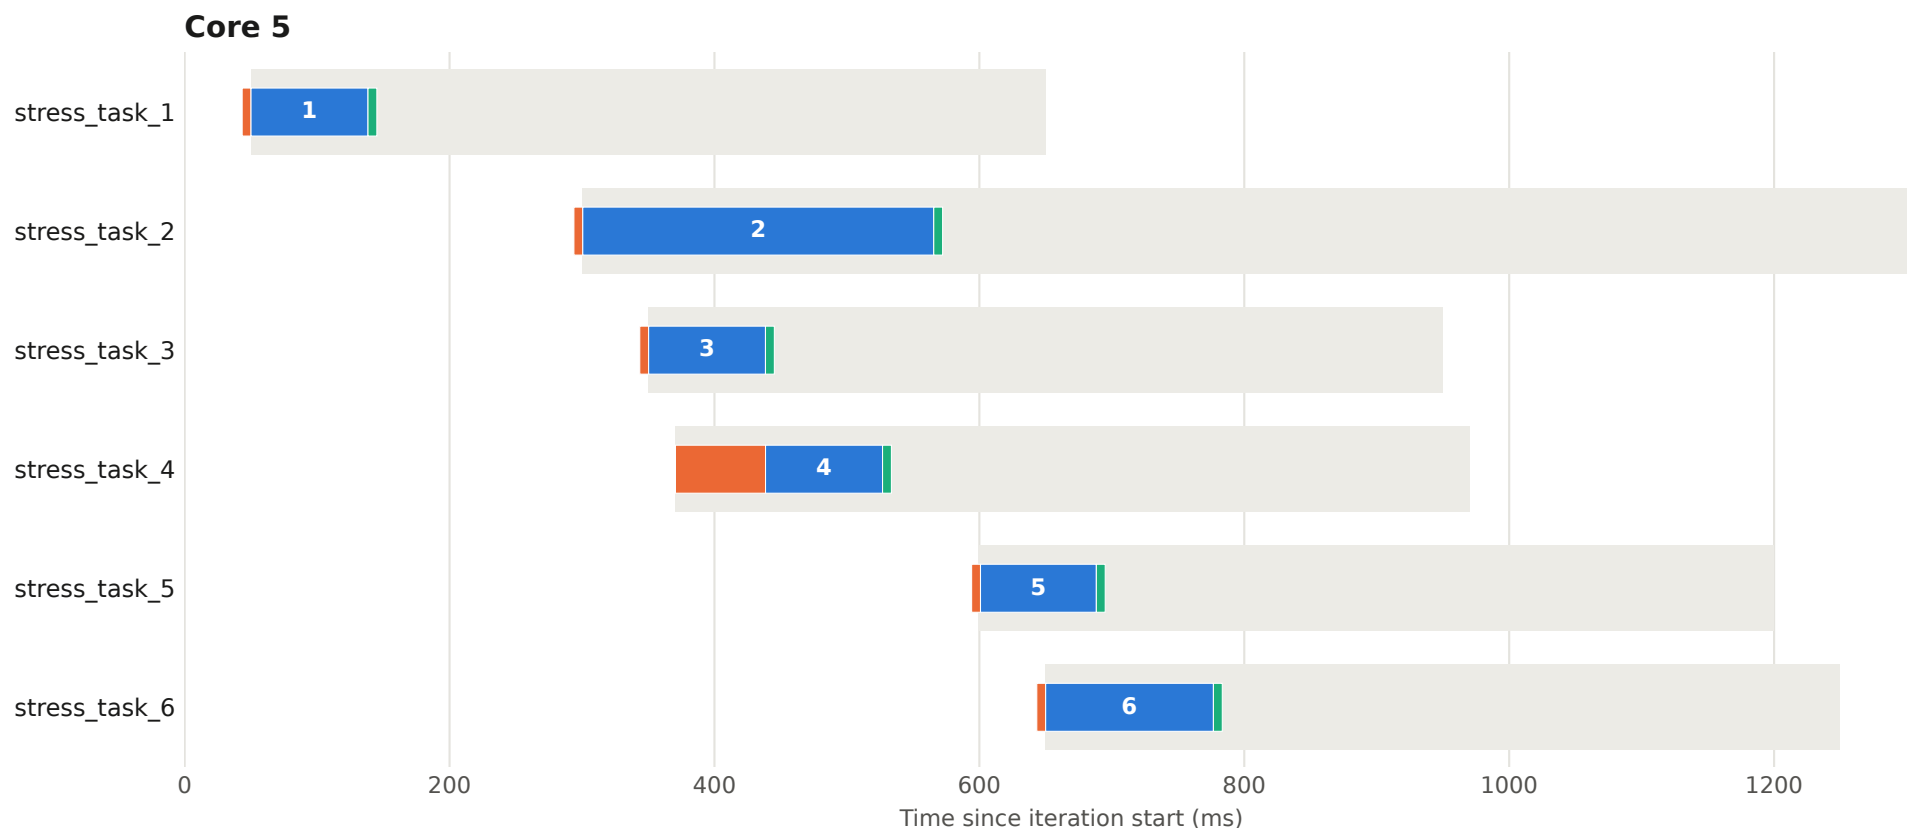


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 31

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

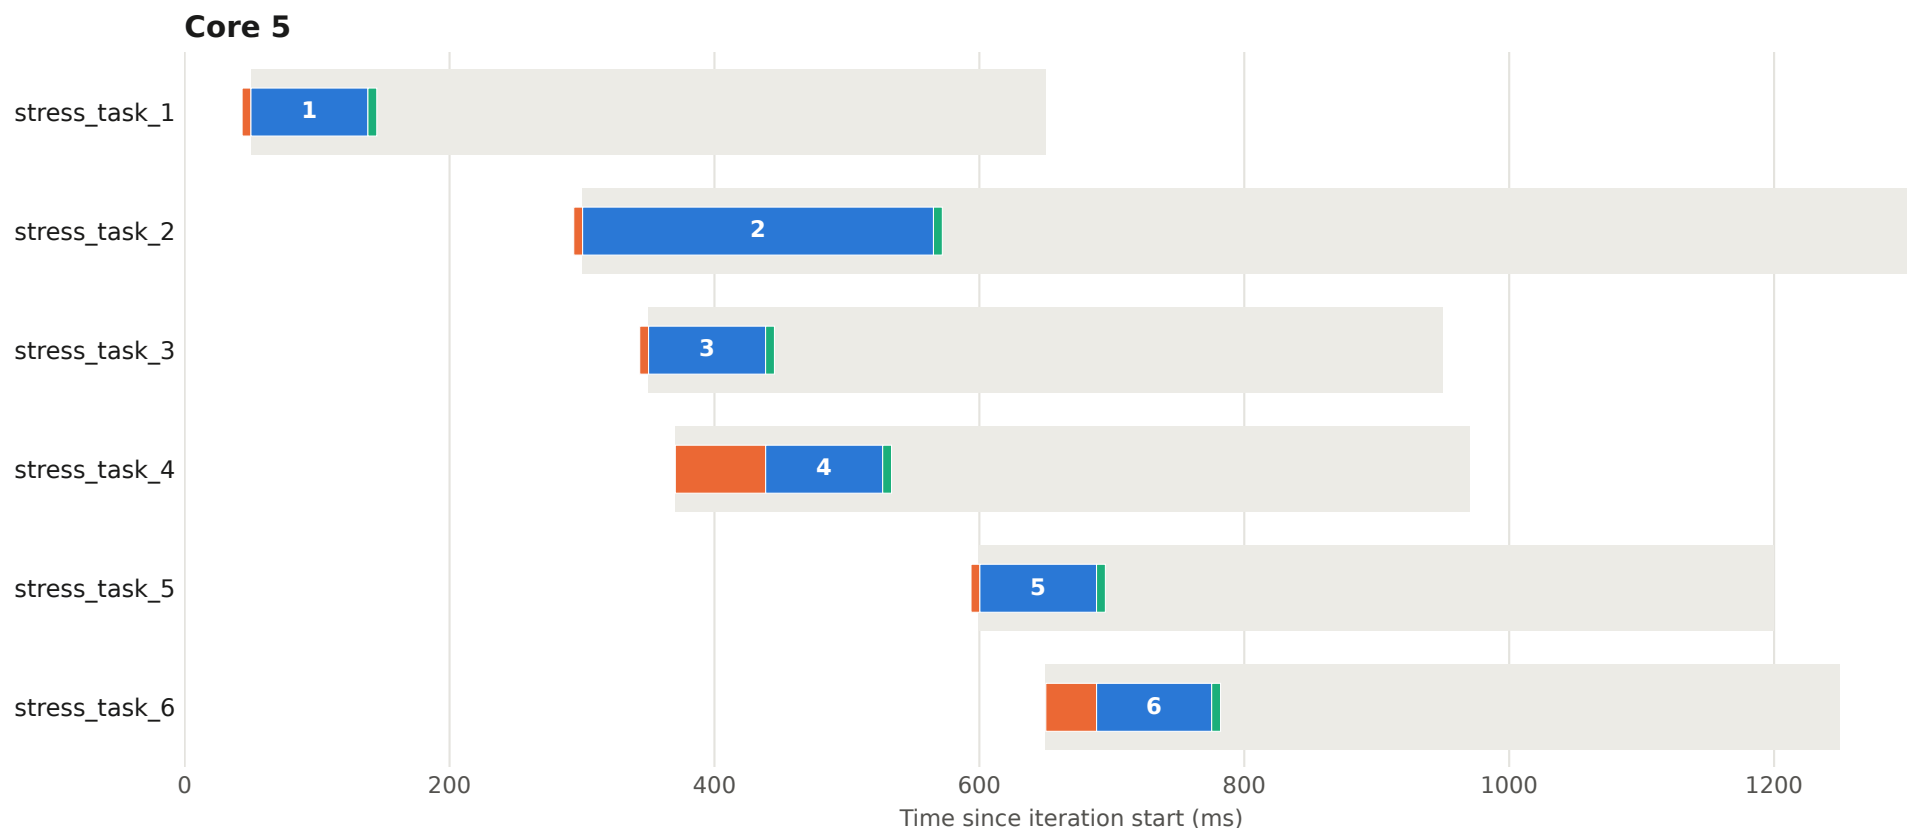


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 32

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

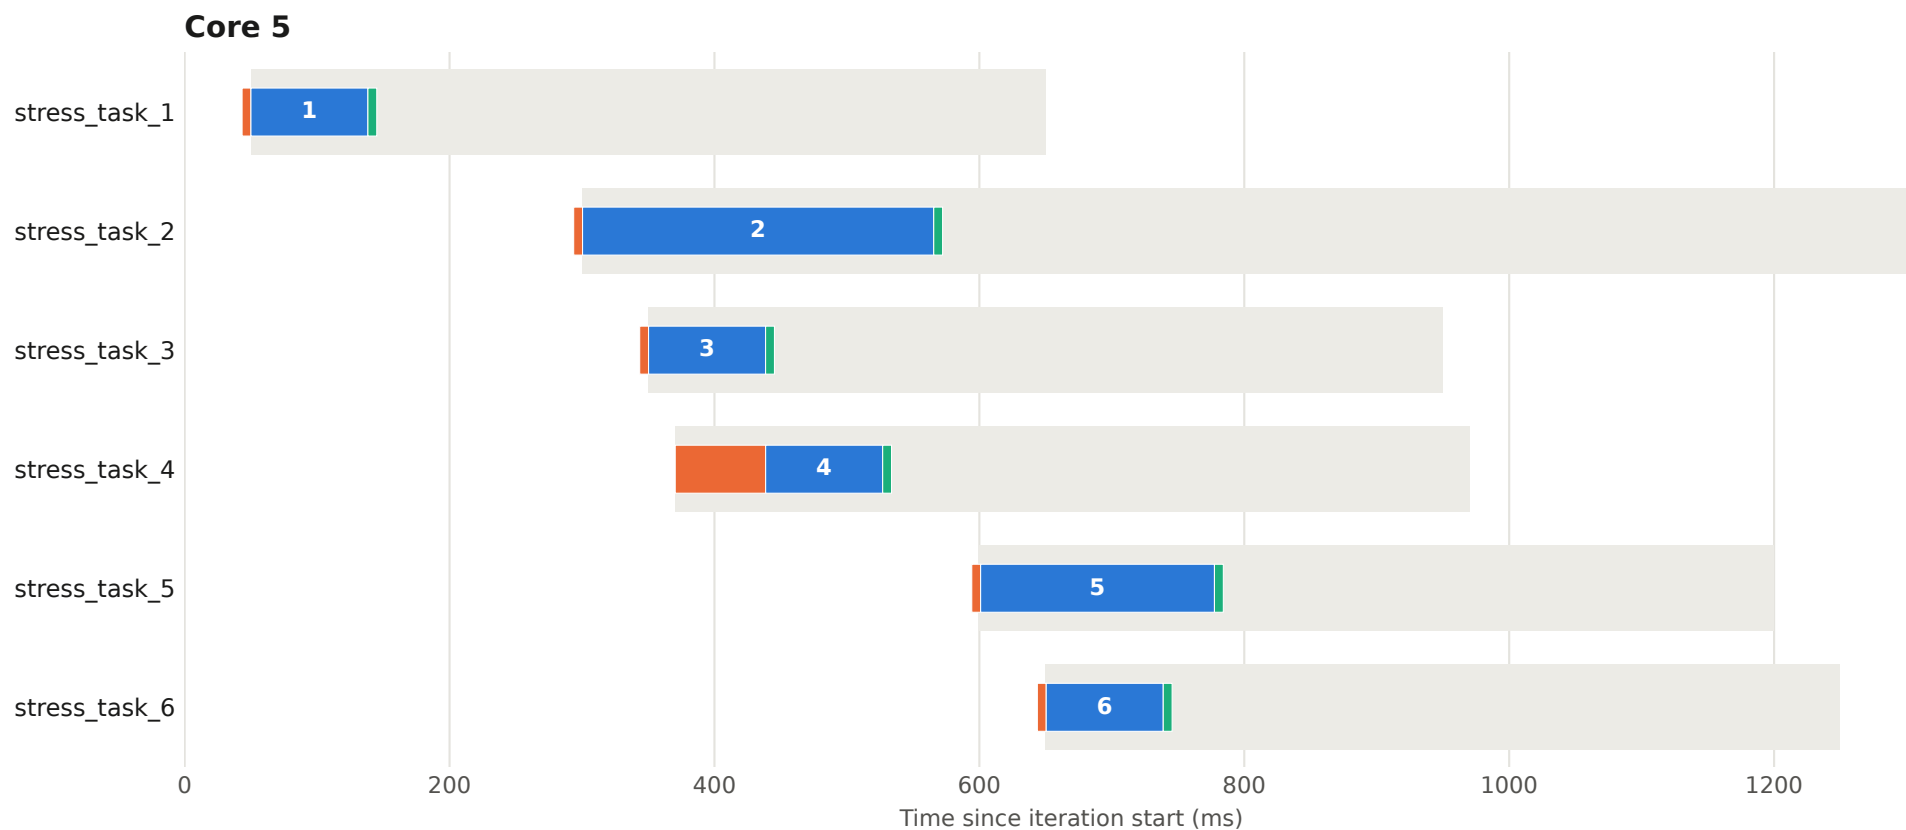


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 33

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

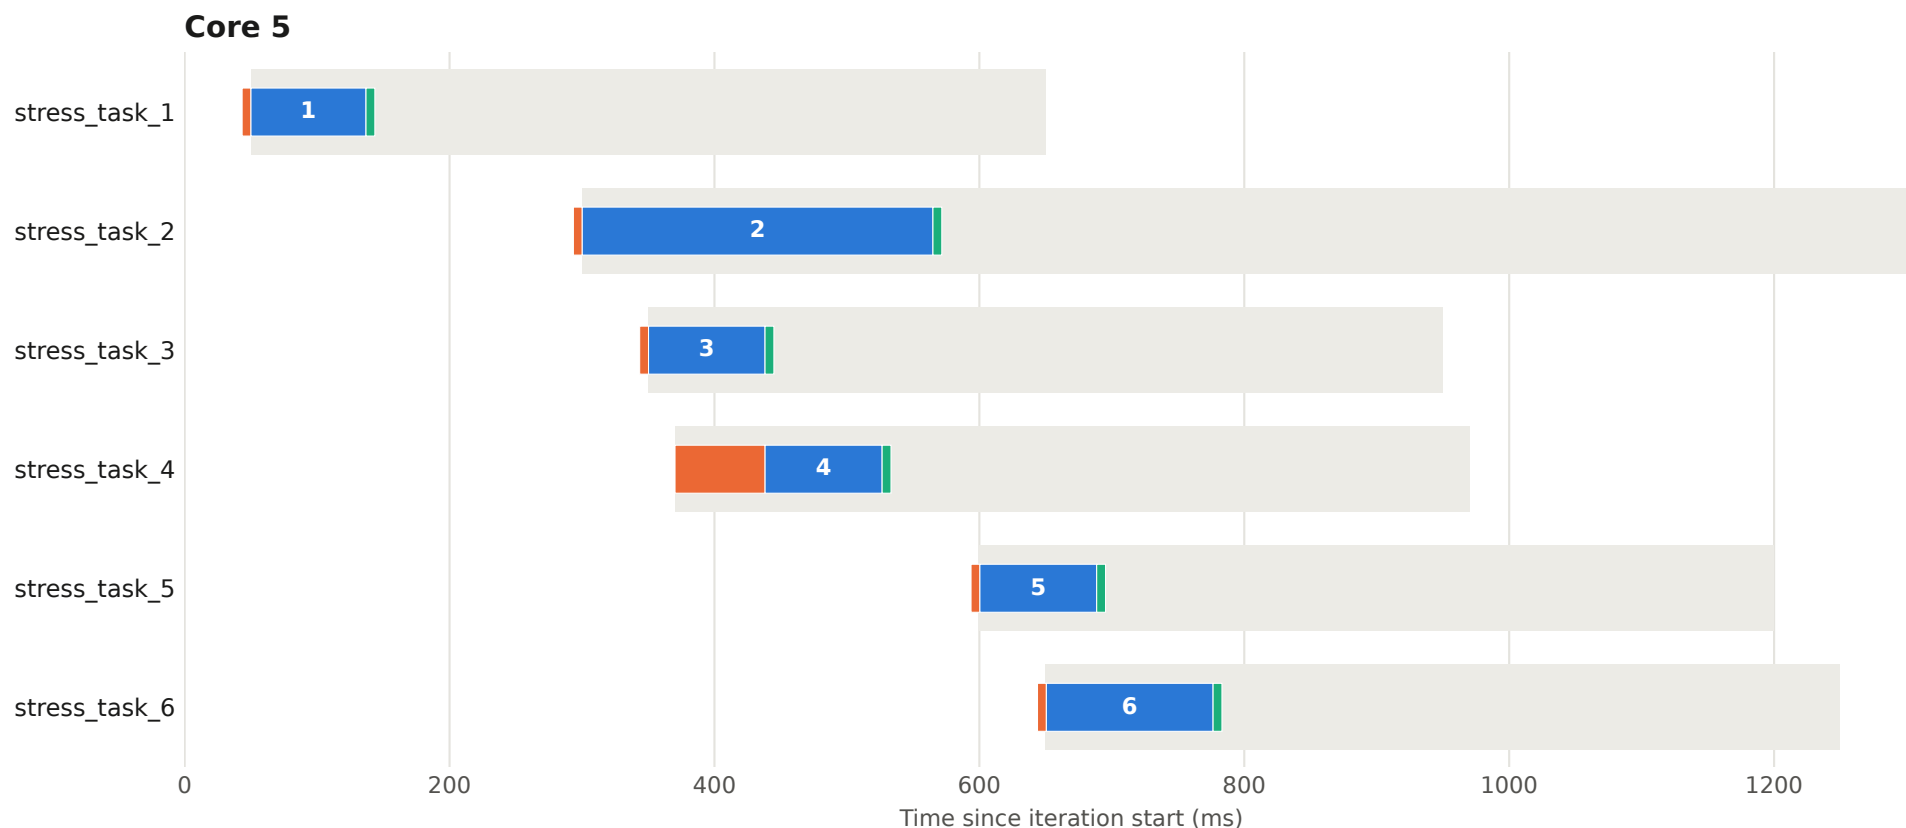


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 34

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

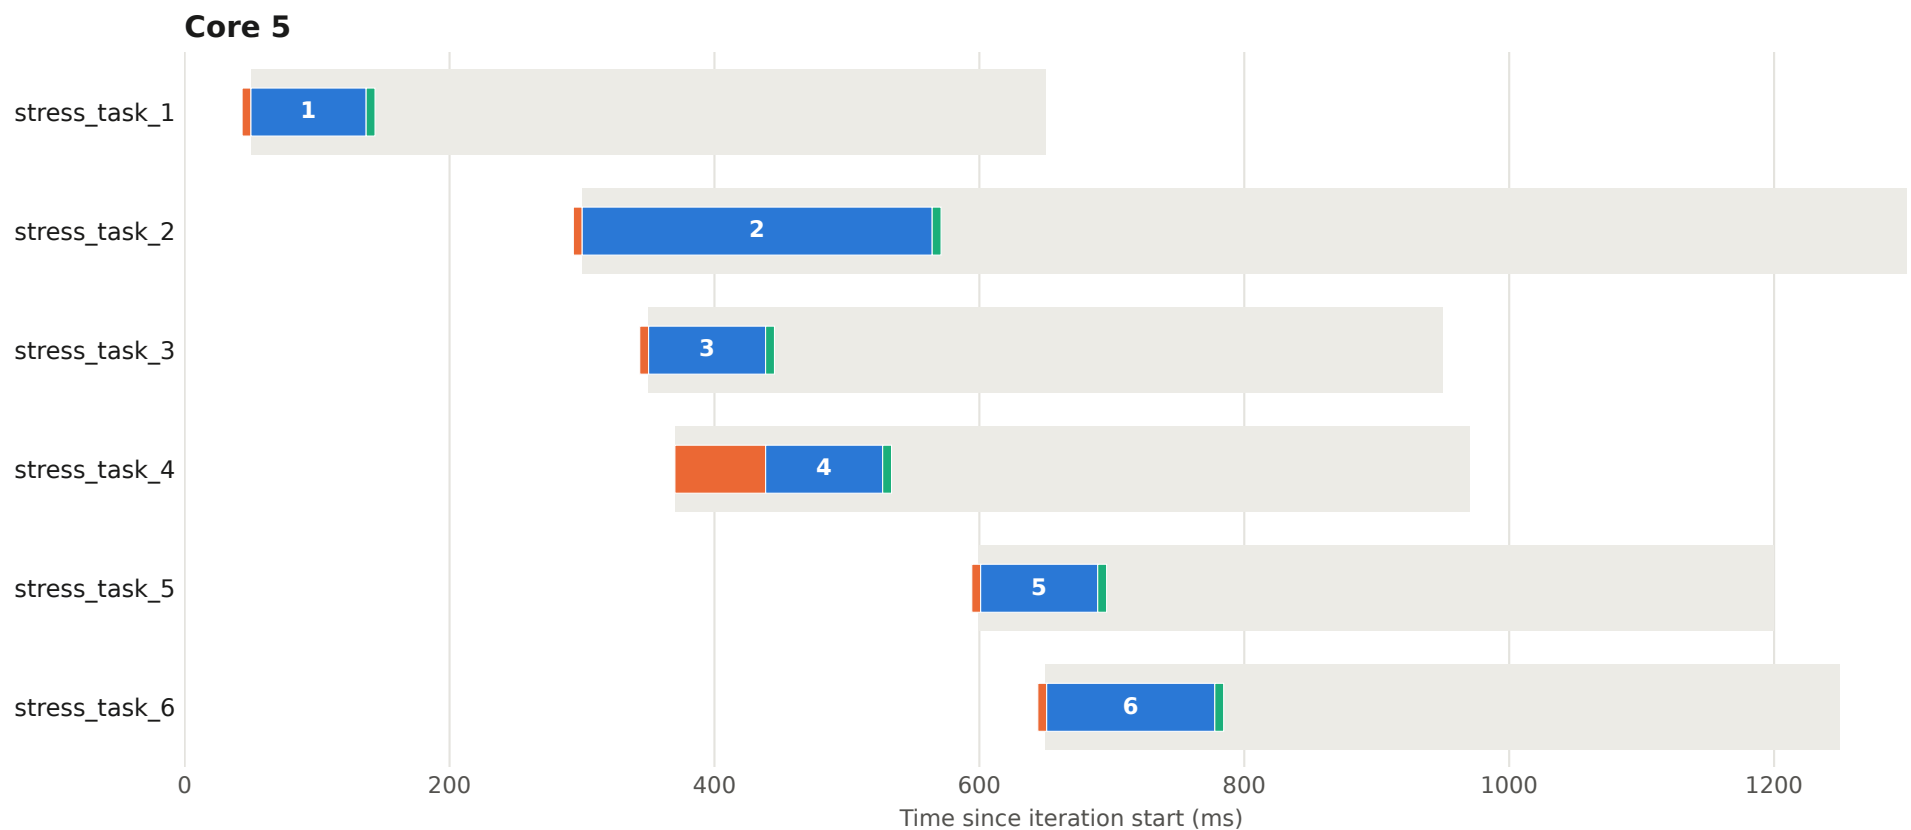


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 35

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

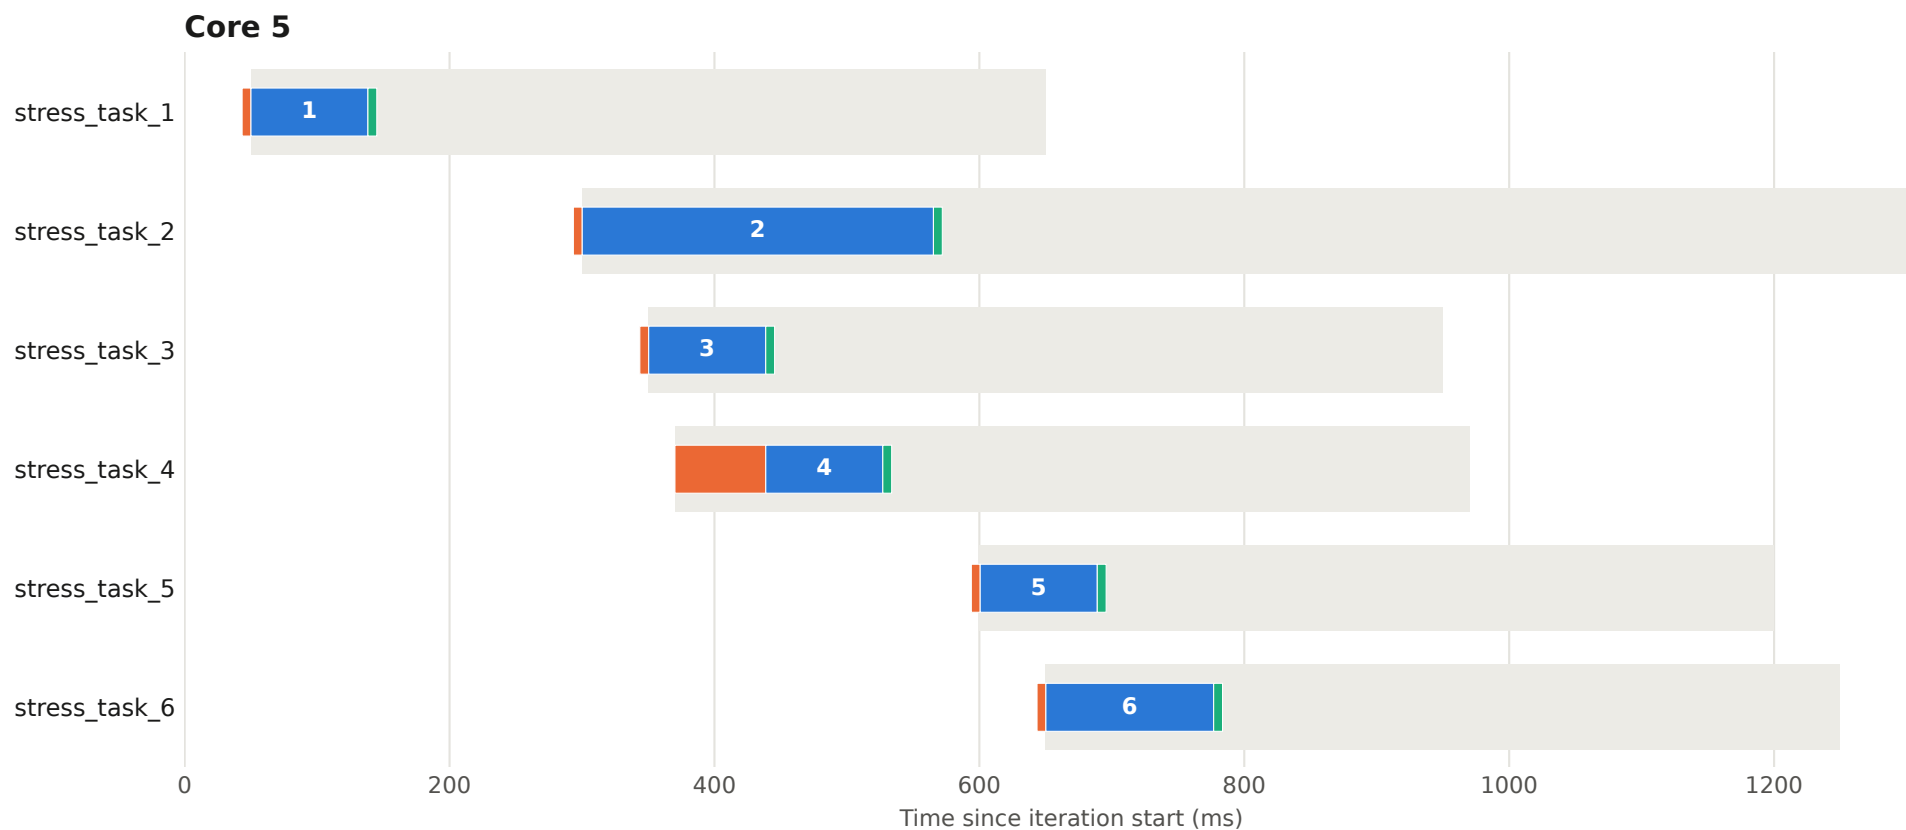


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 36

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

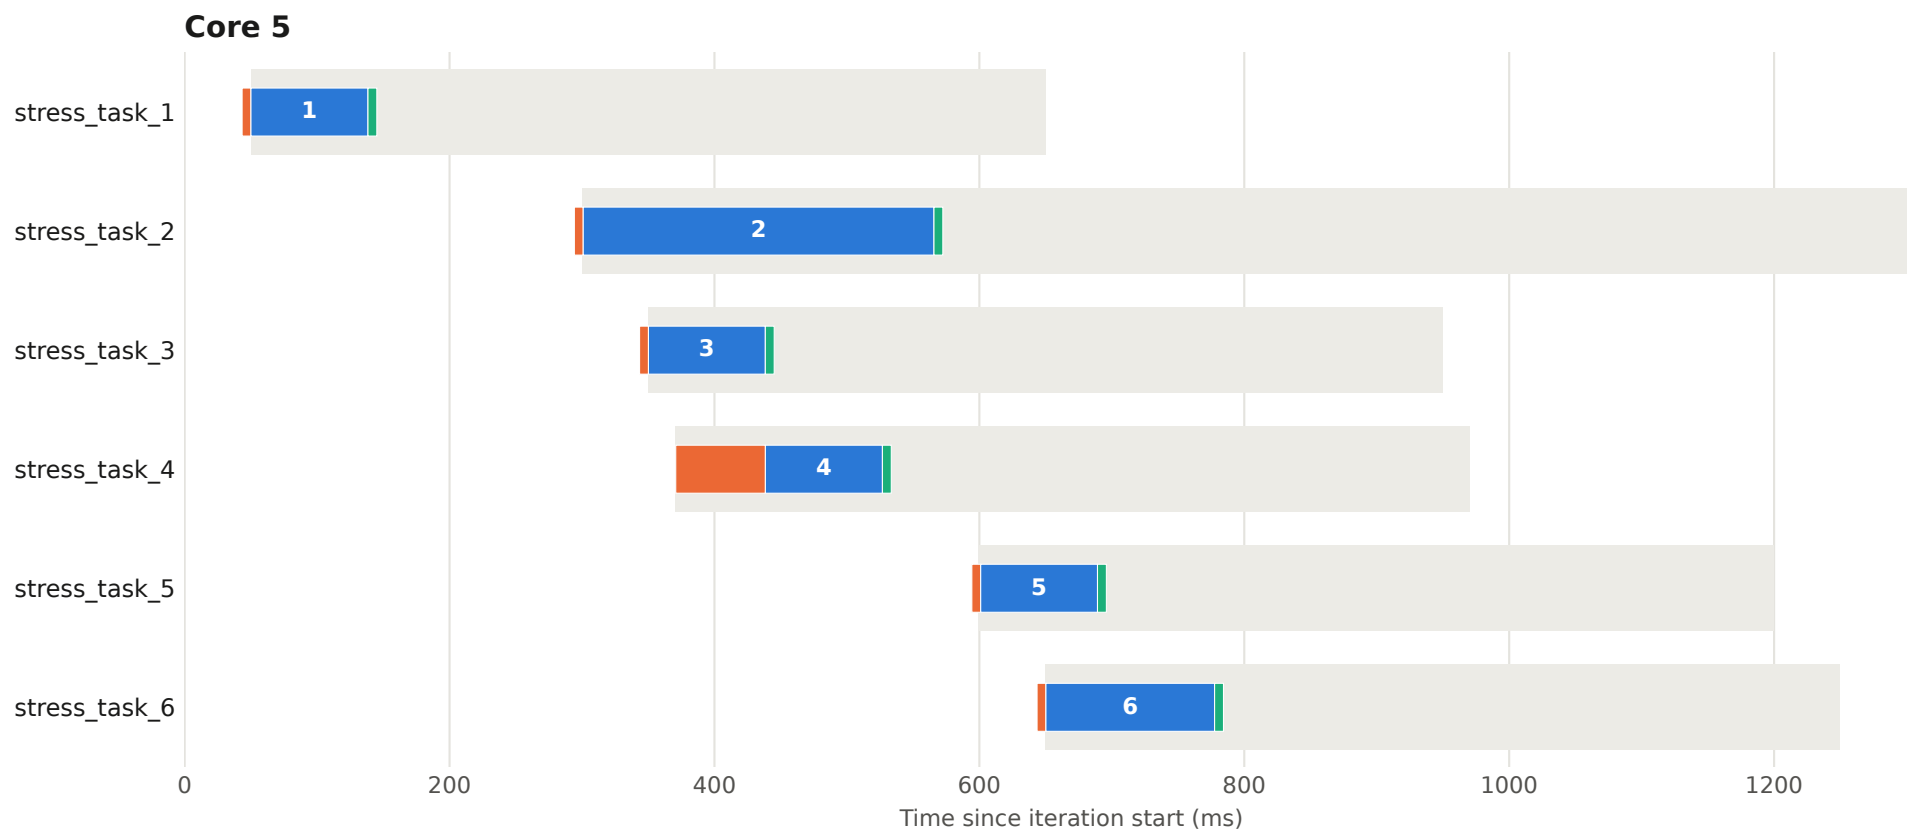


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 37

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

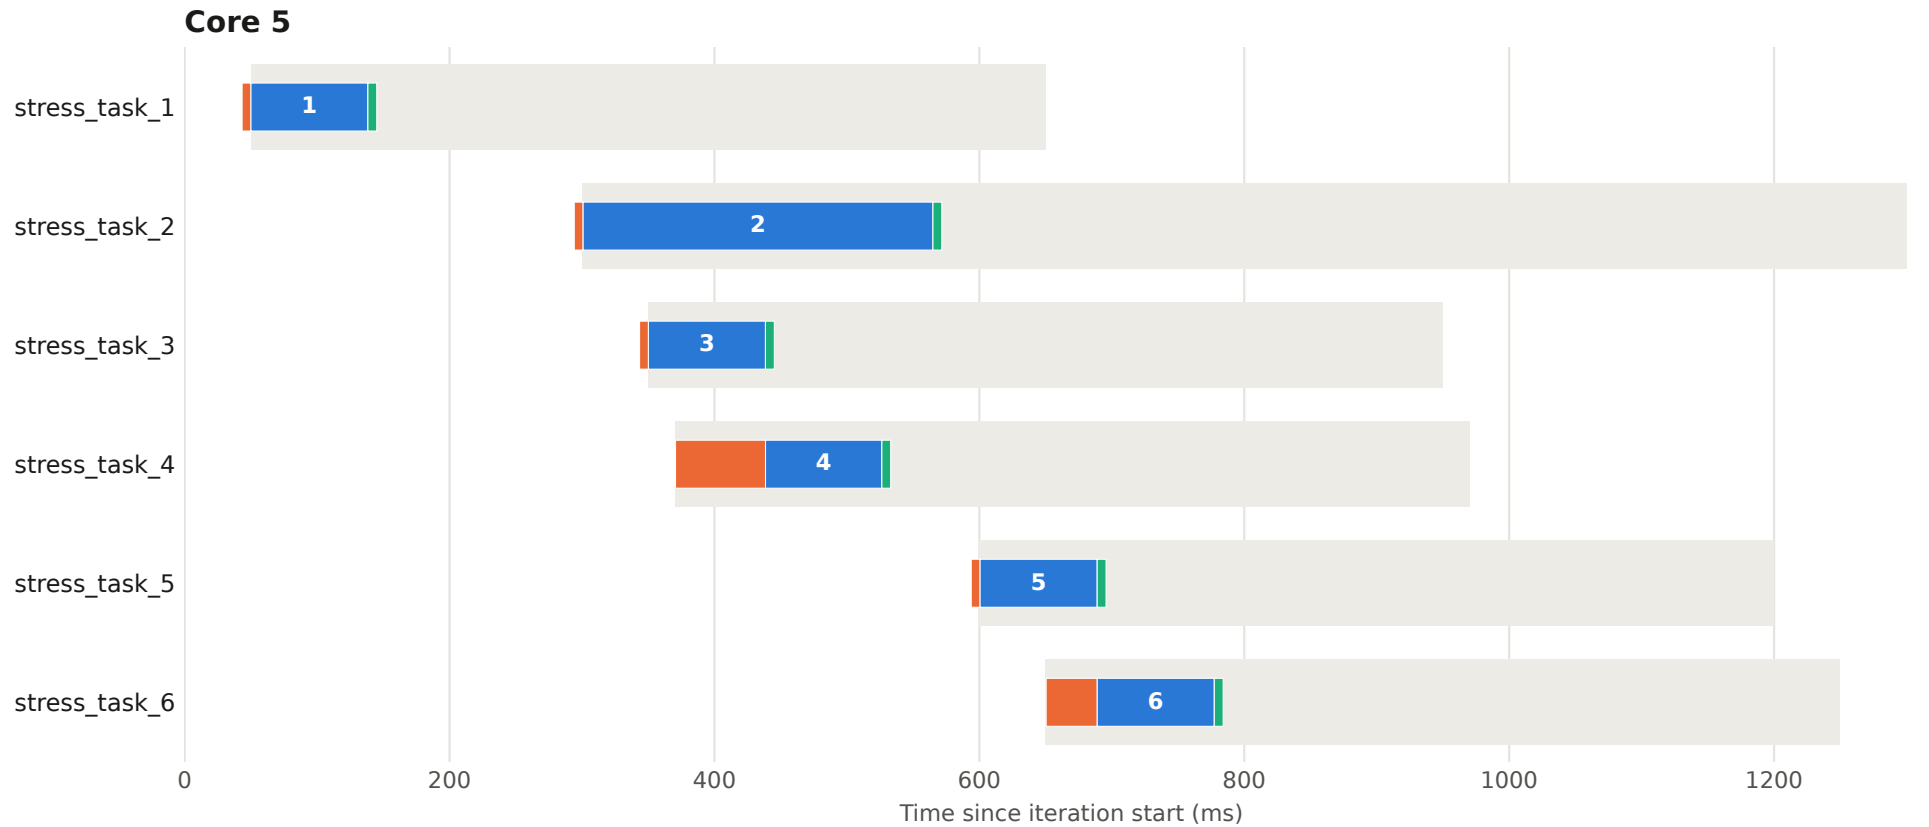


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 38

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

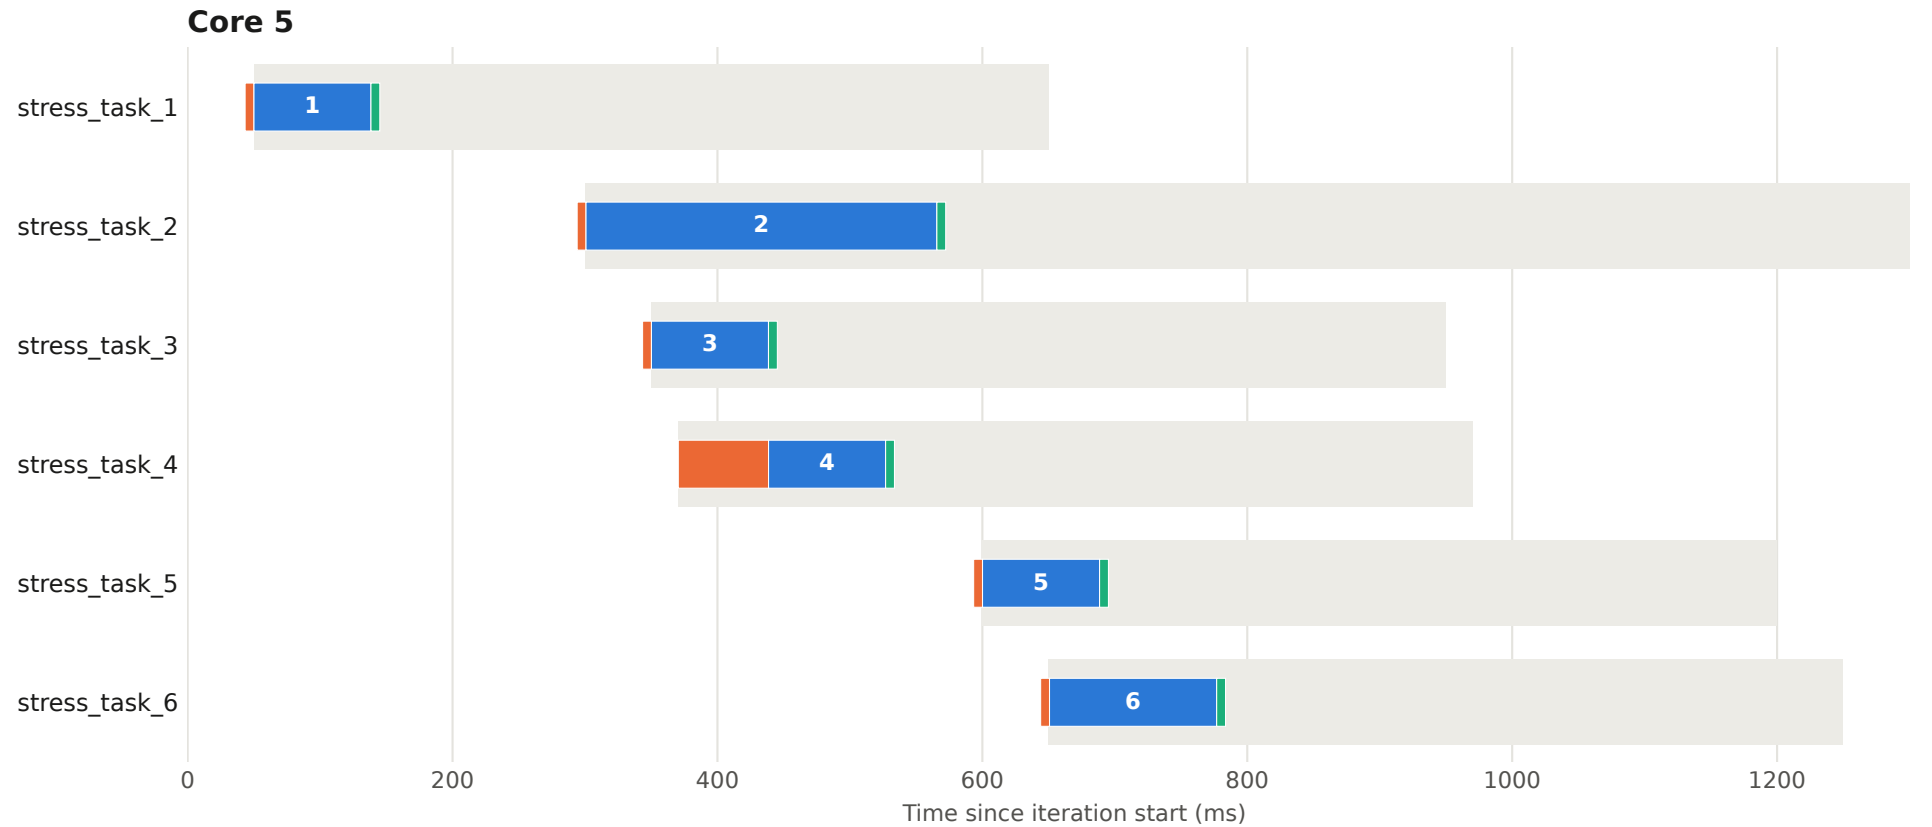


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 39

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

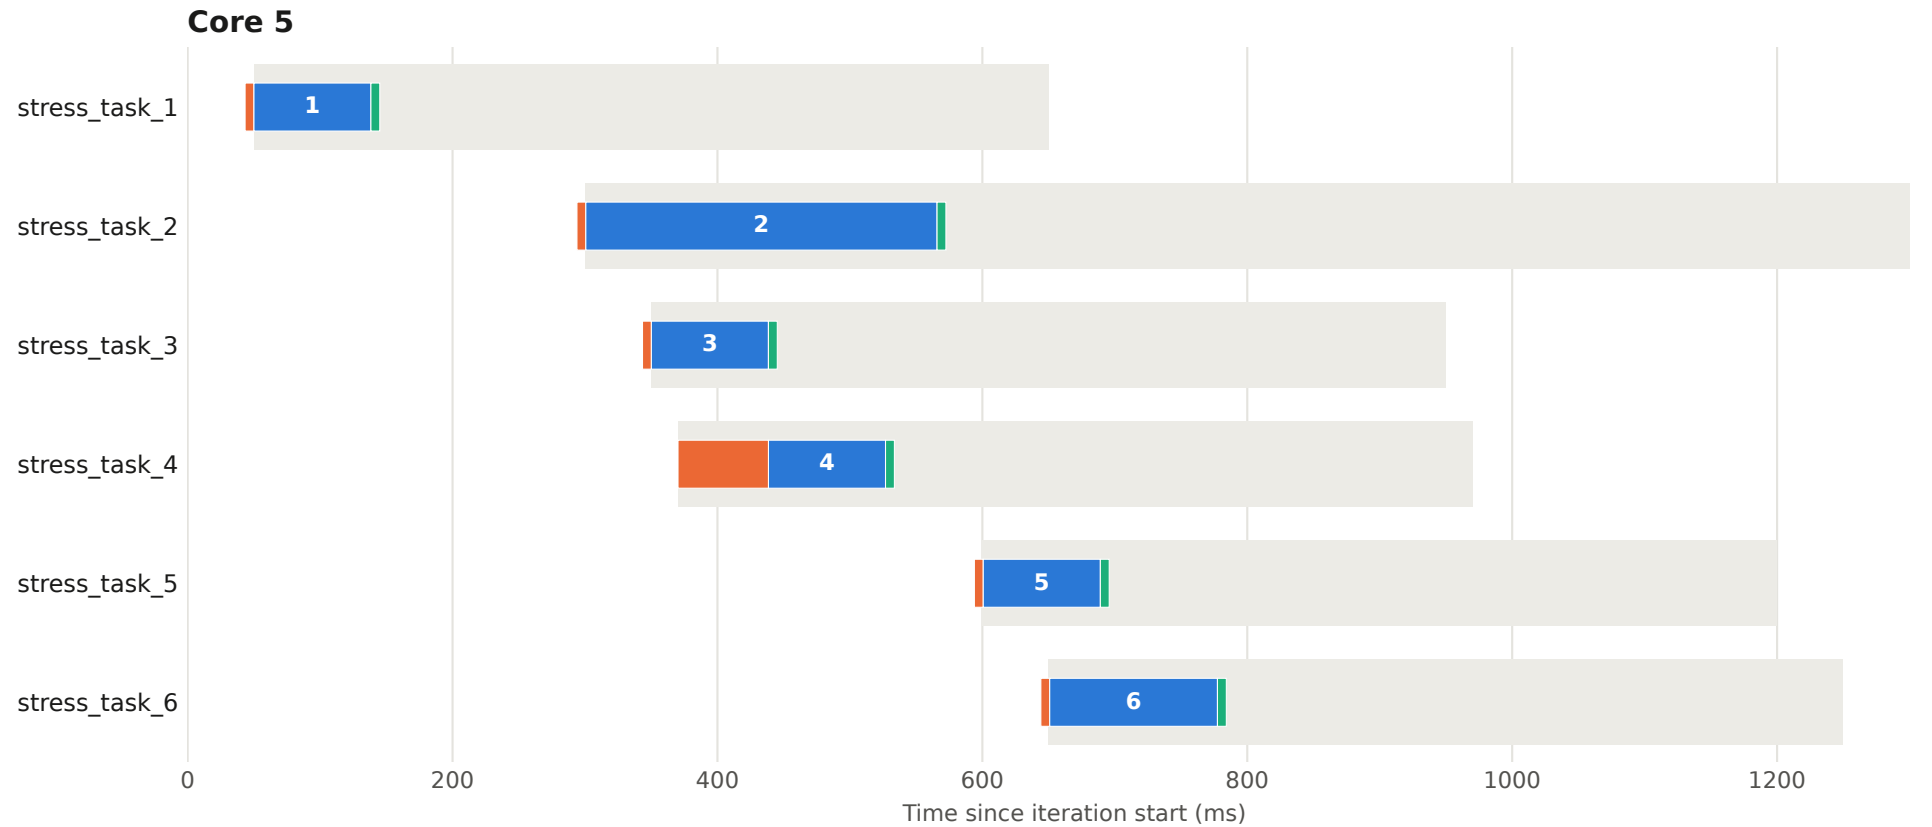


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 40

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

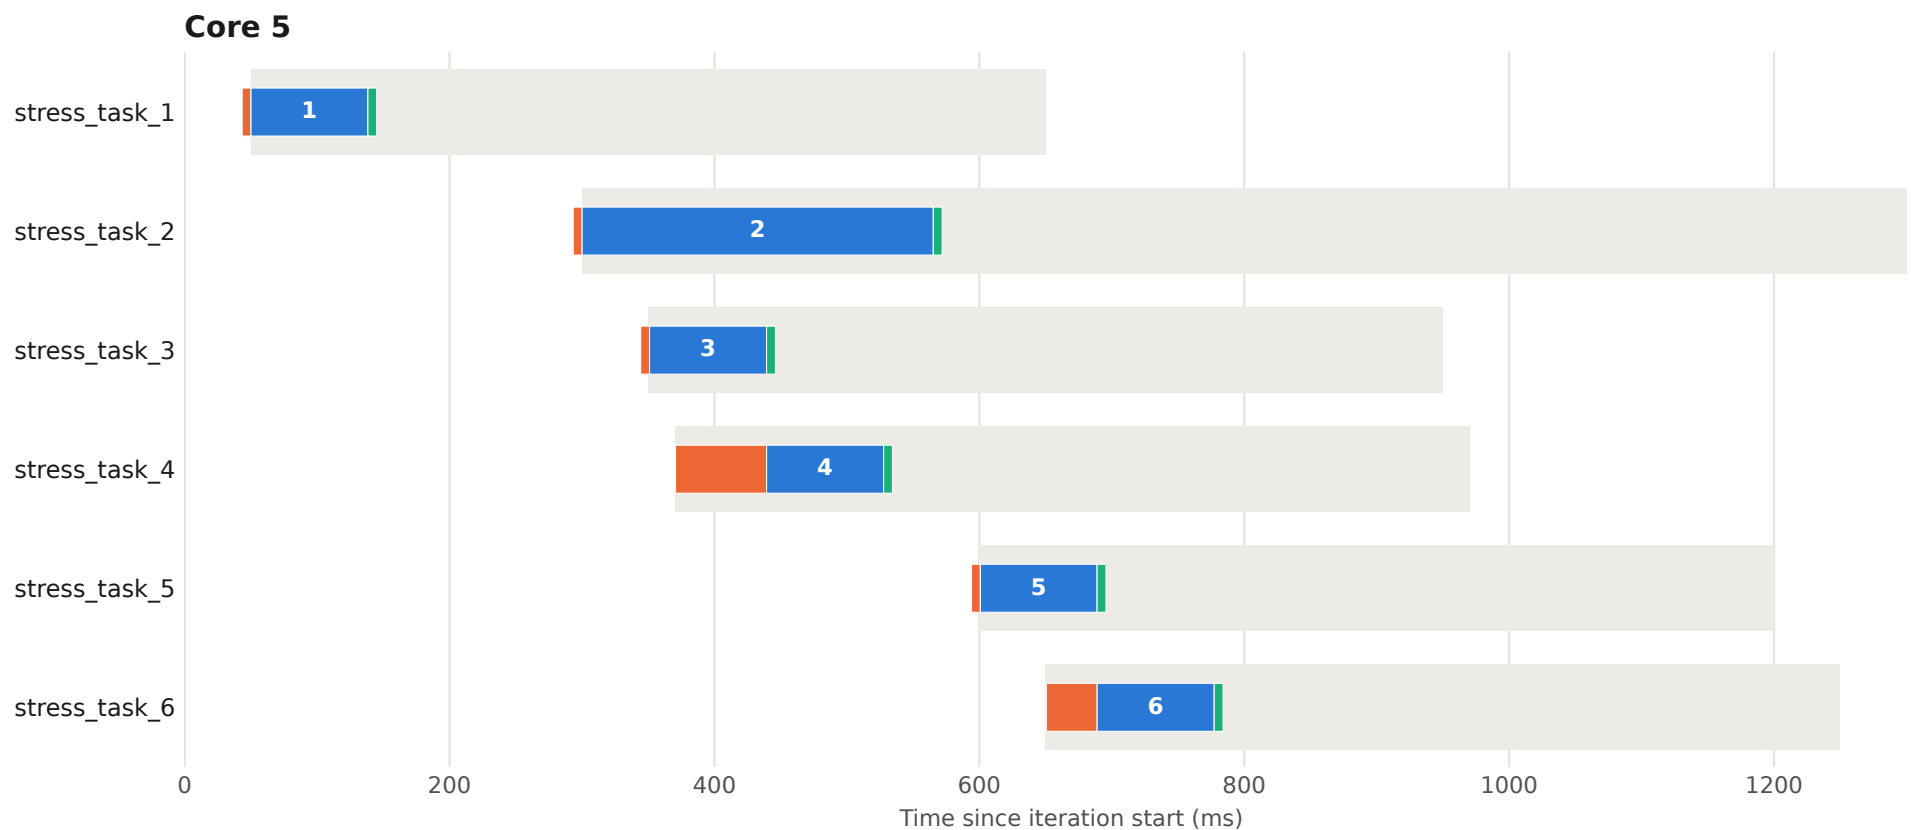


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 41

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

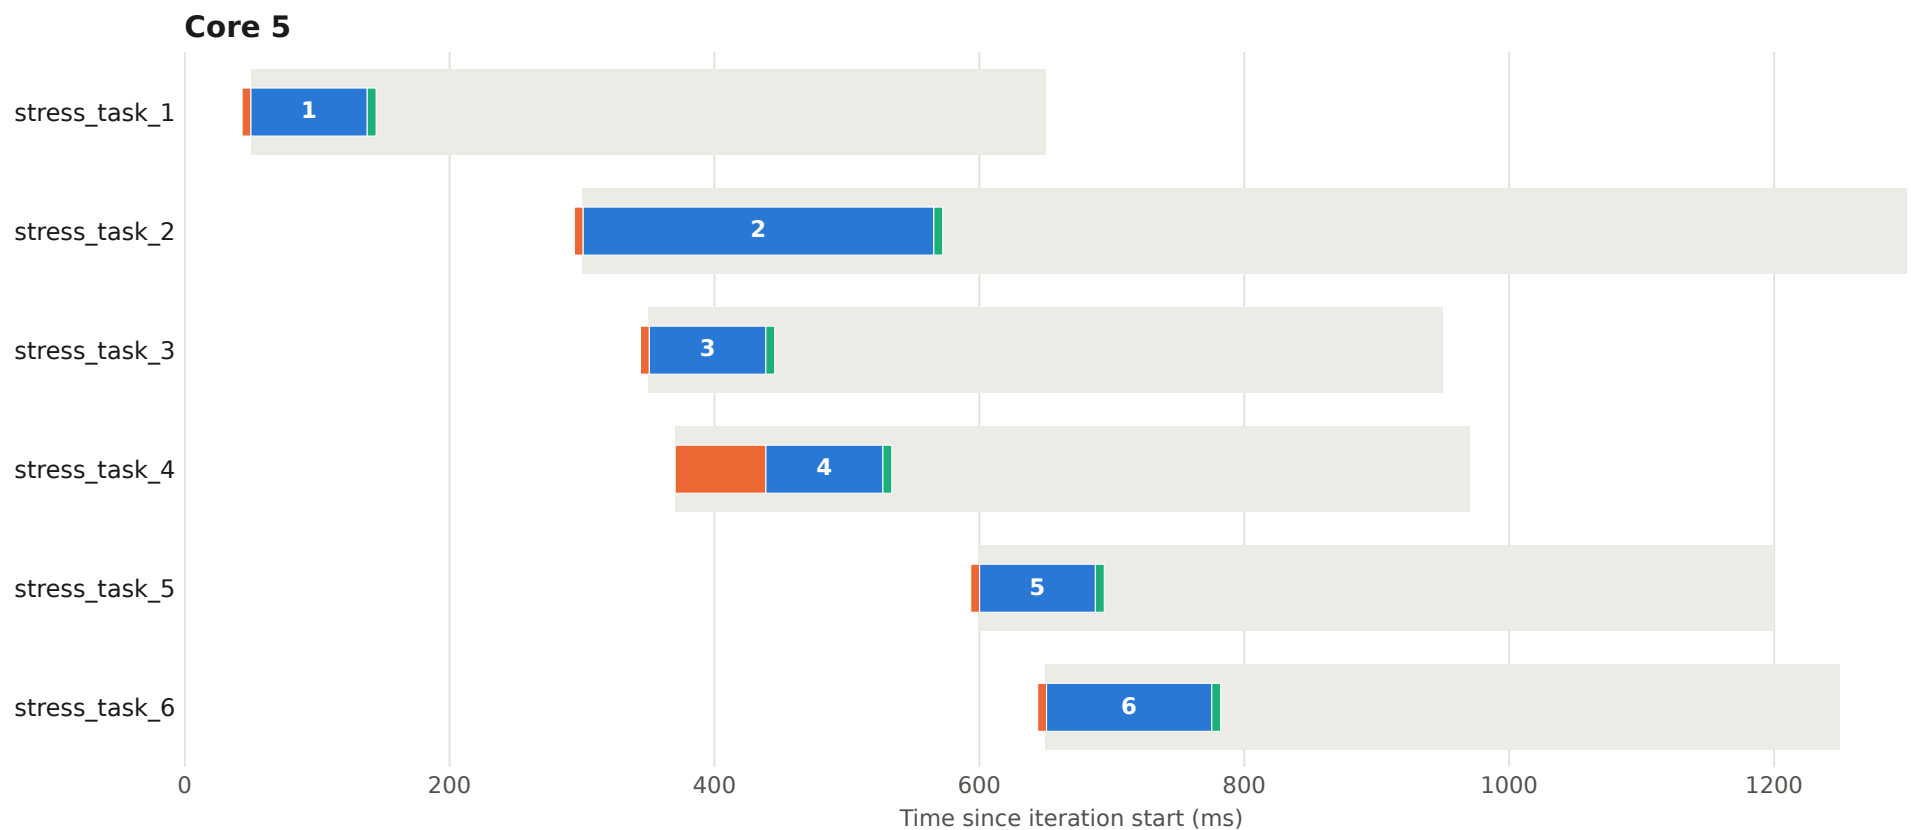


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 42

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

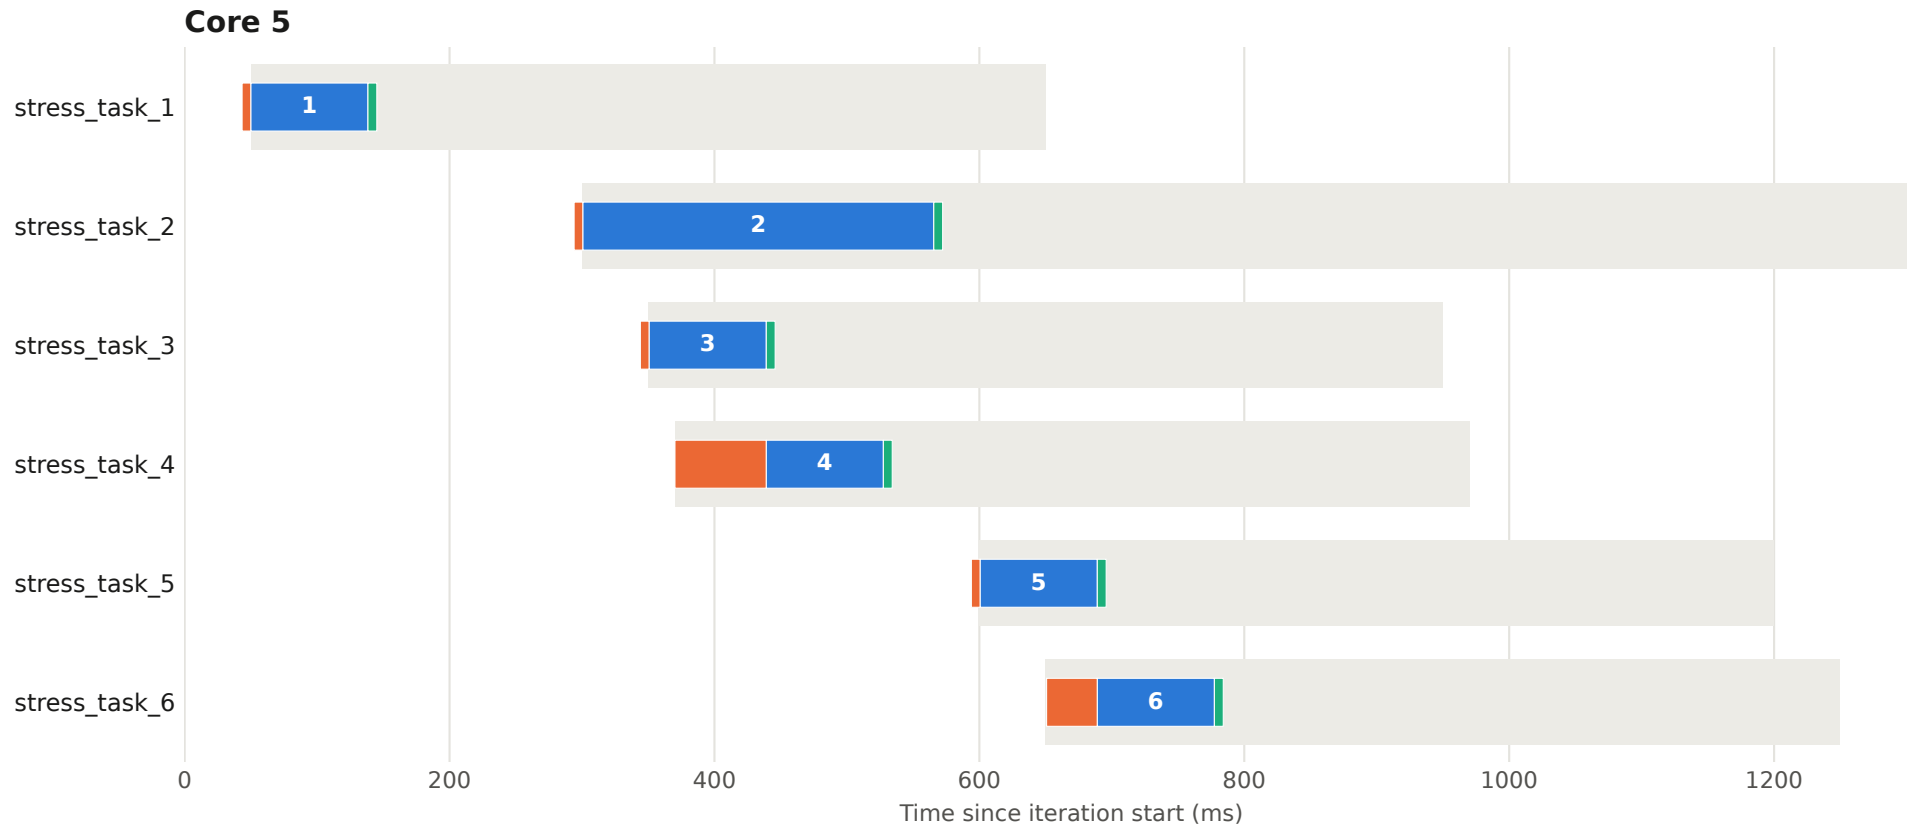


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 43

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

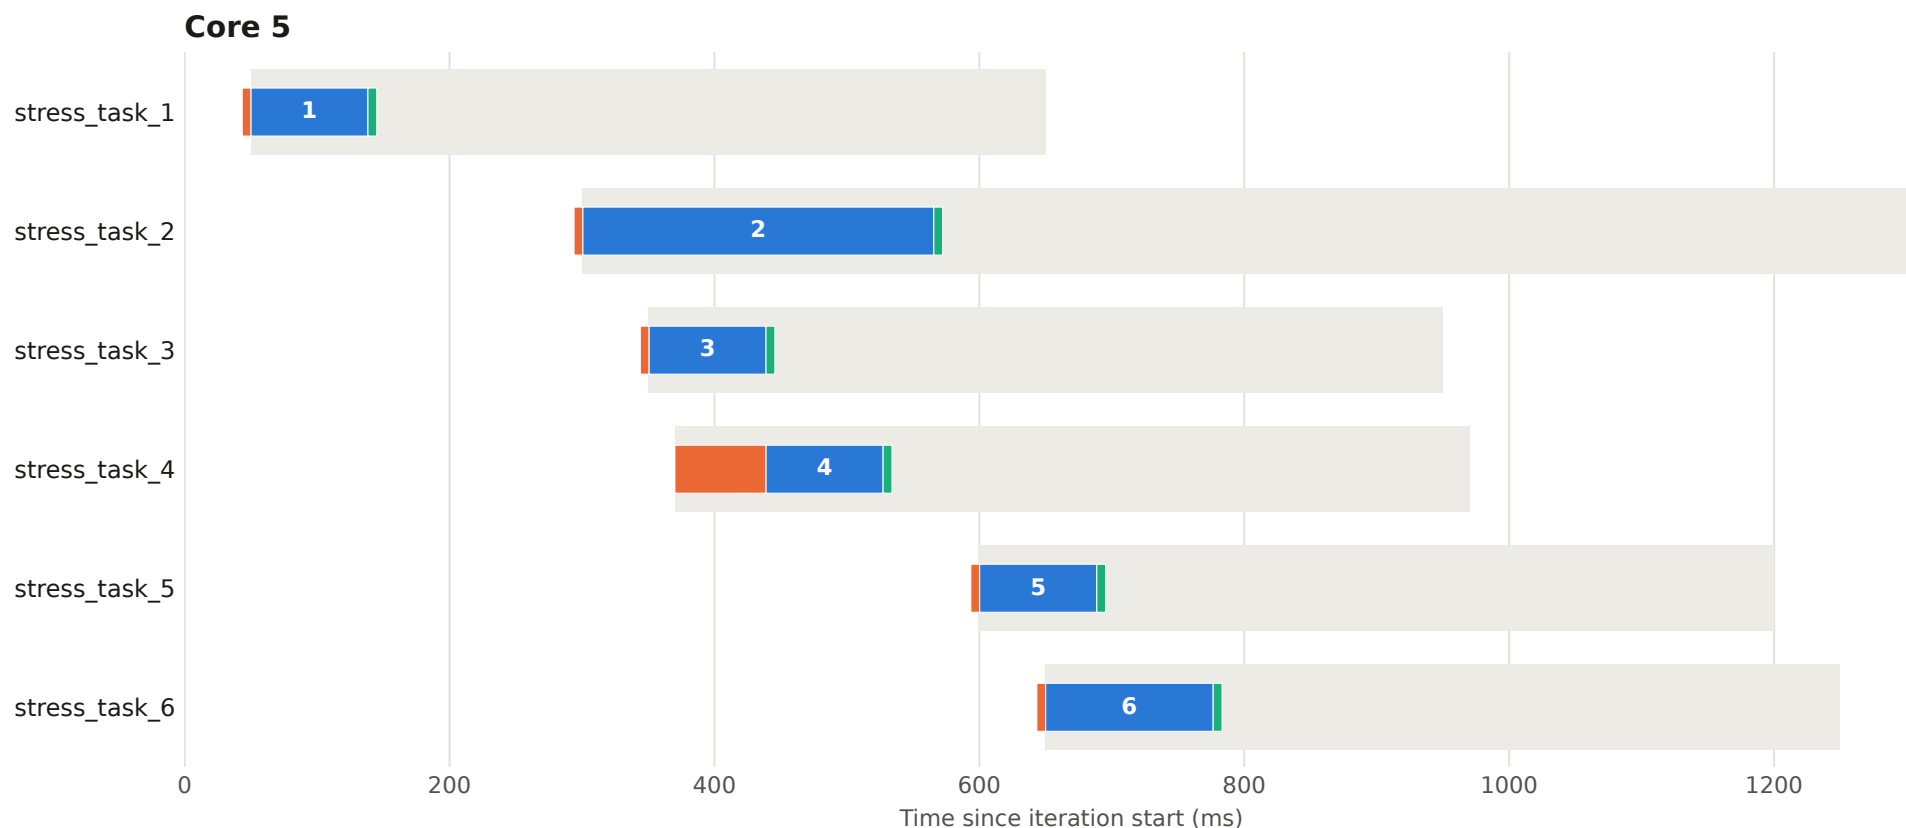


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 44

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

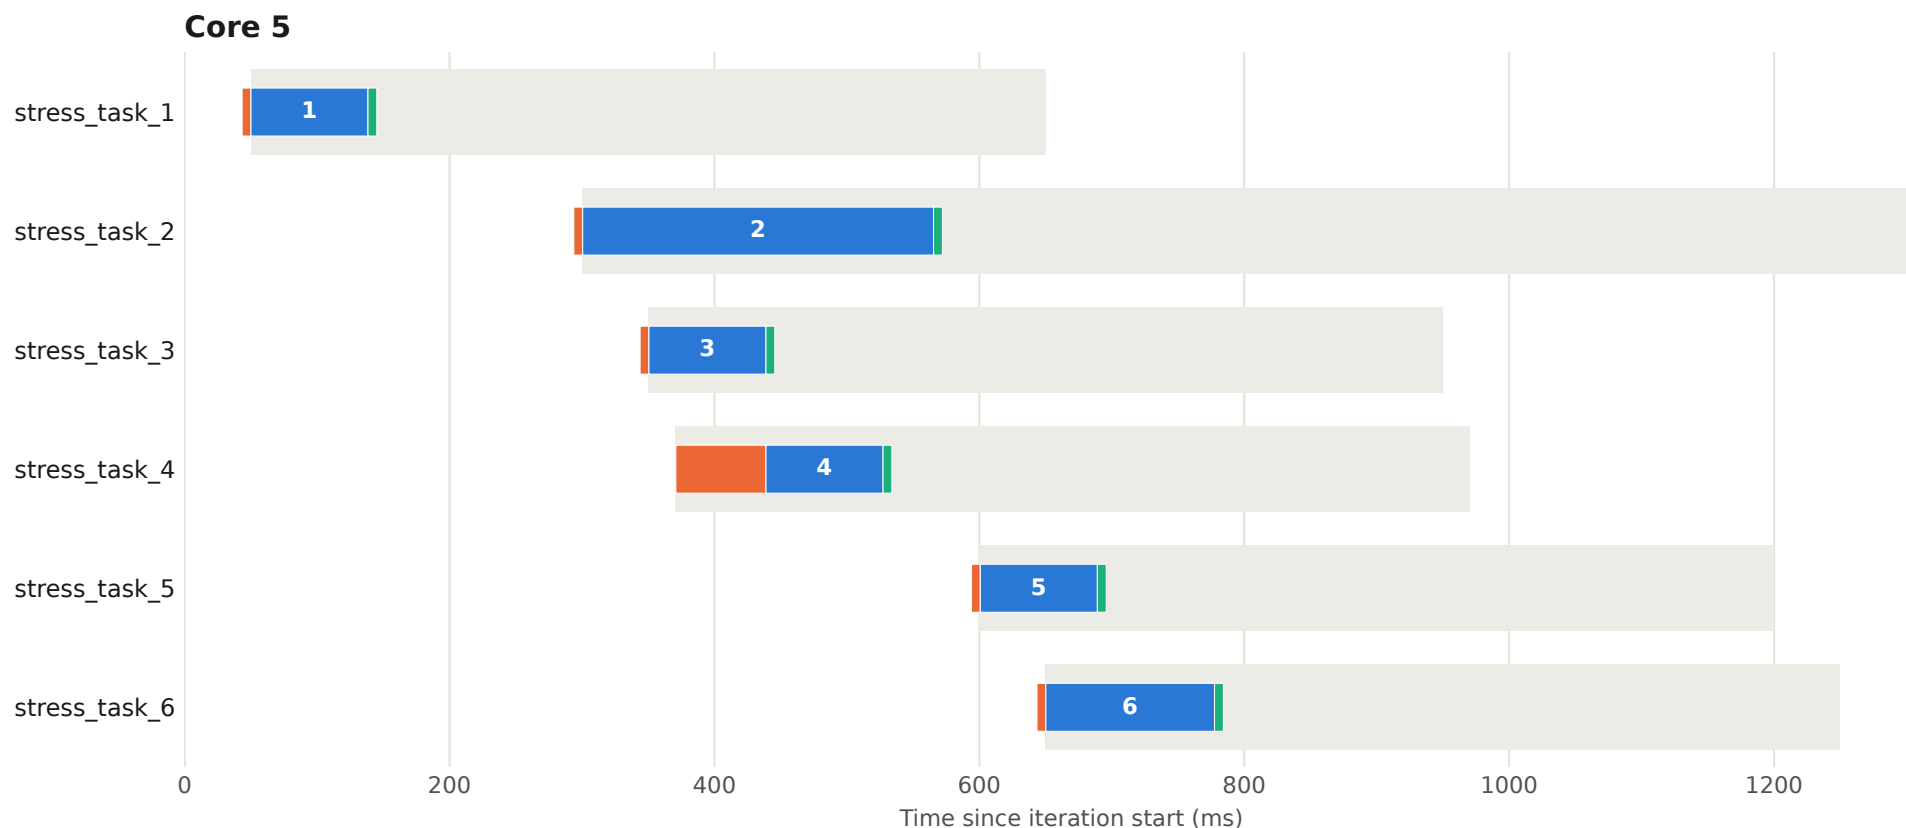


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 45

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

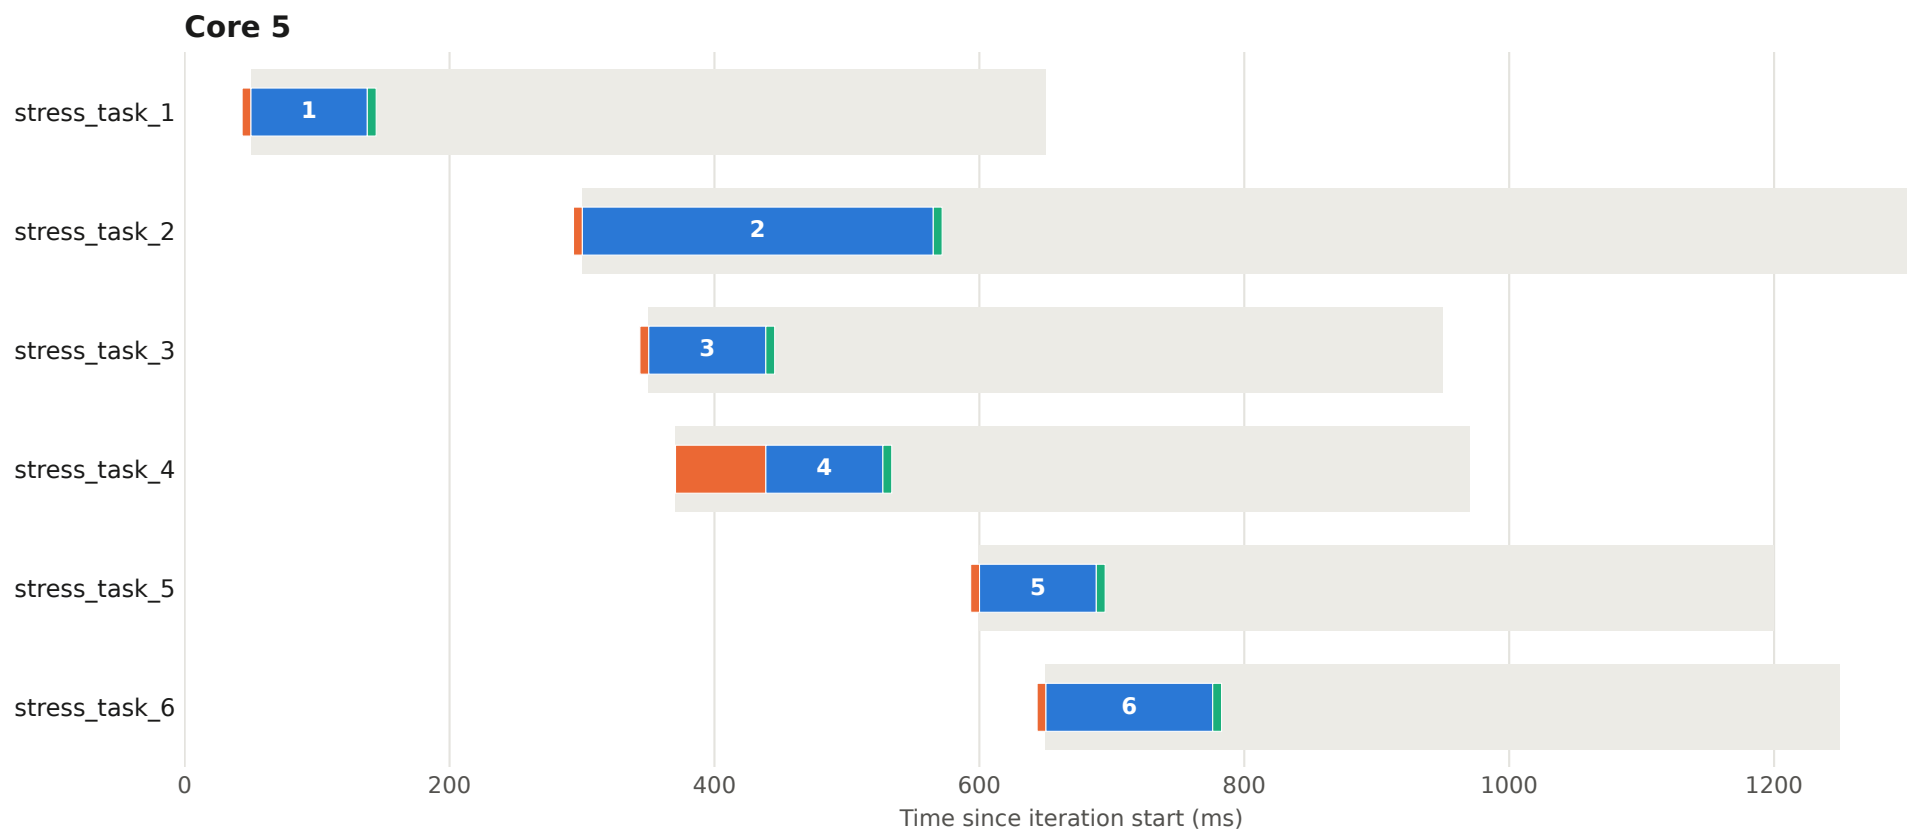


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 46

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

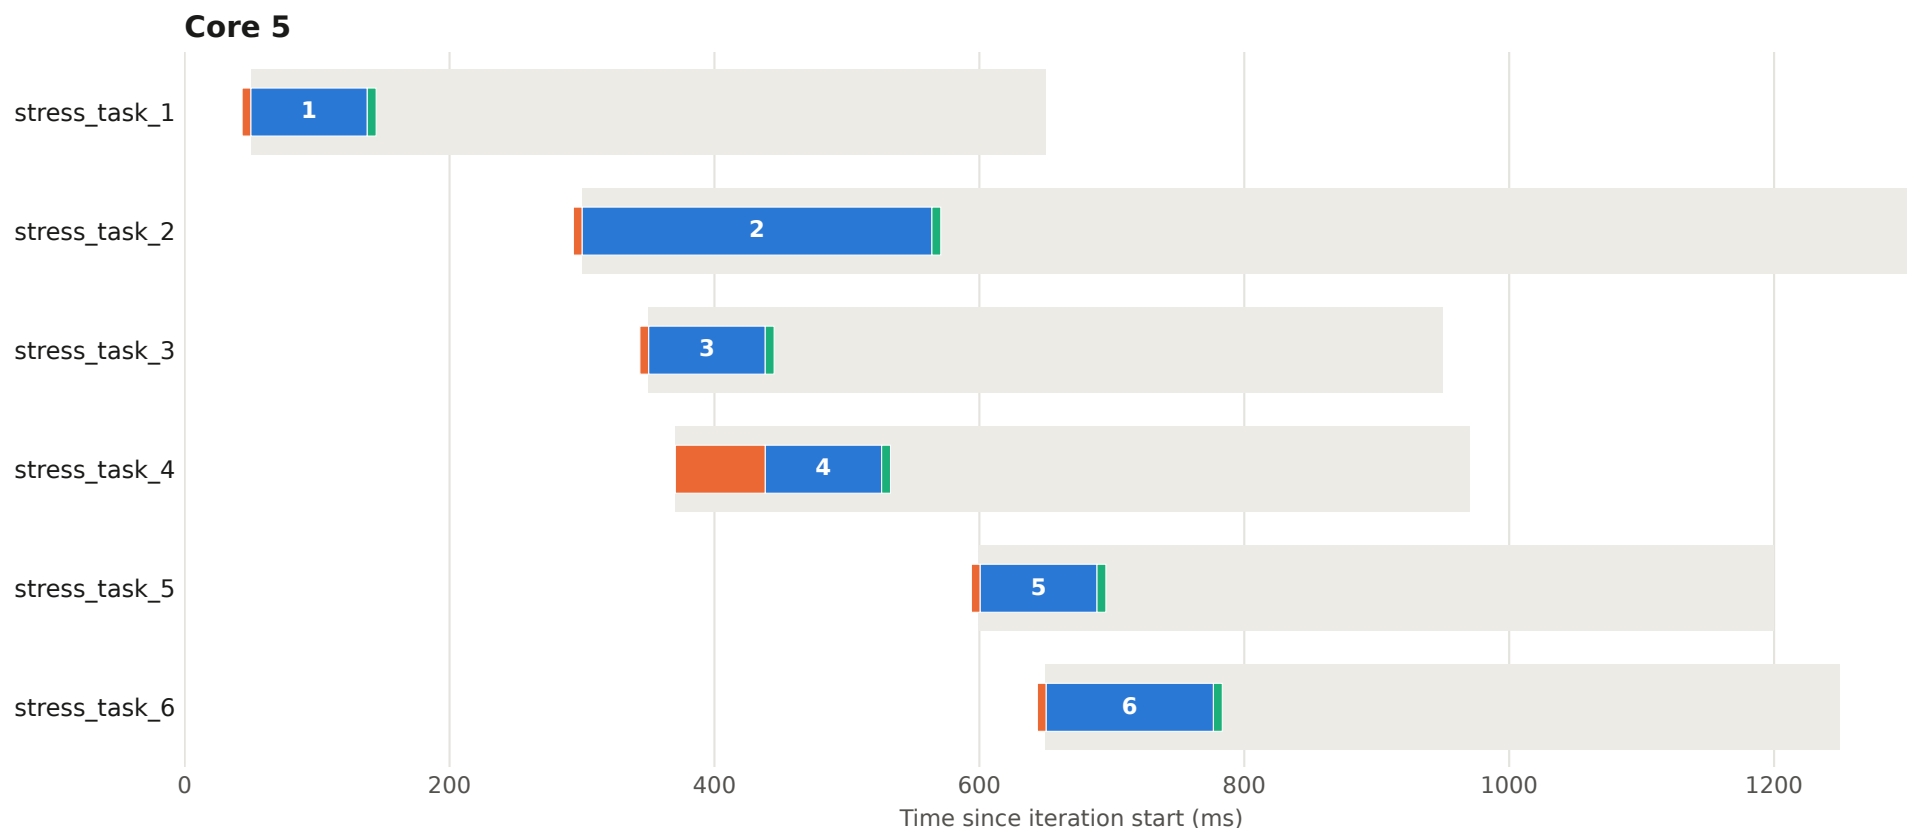


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 47

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

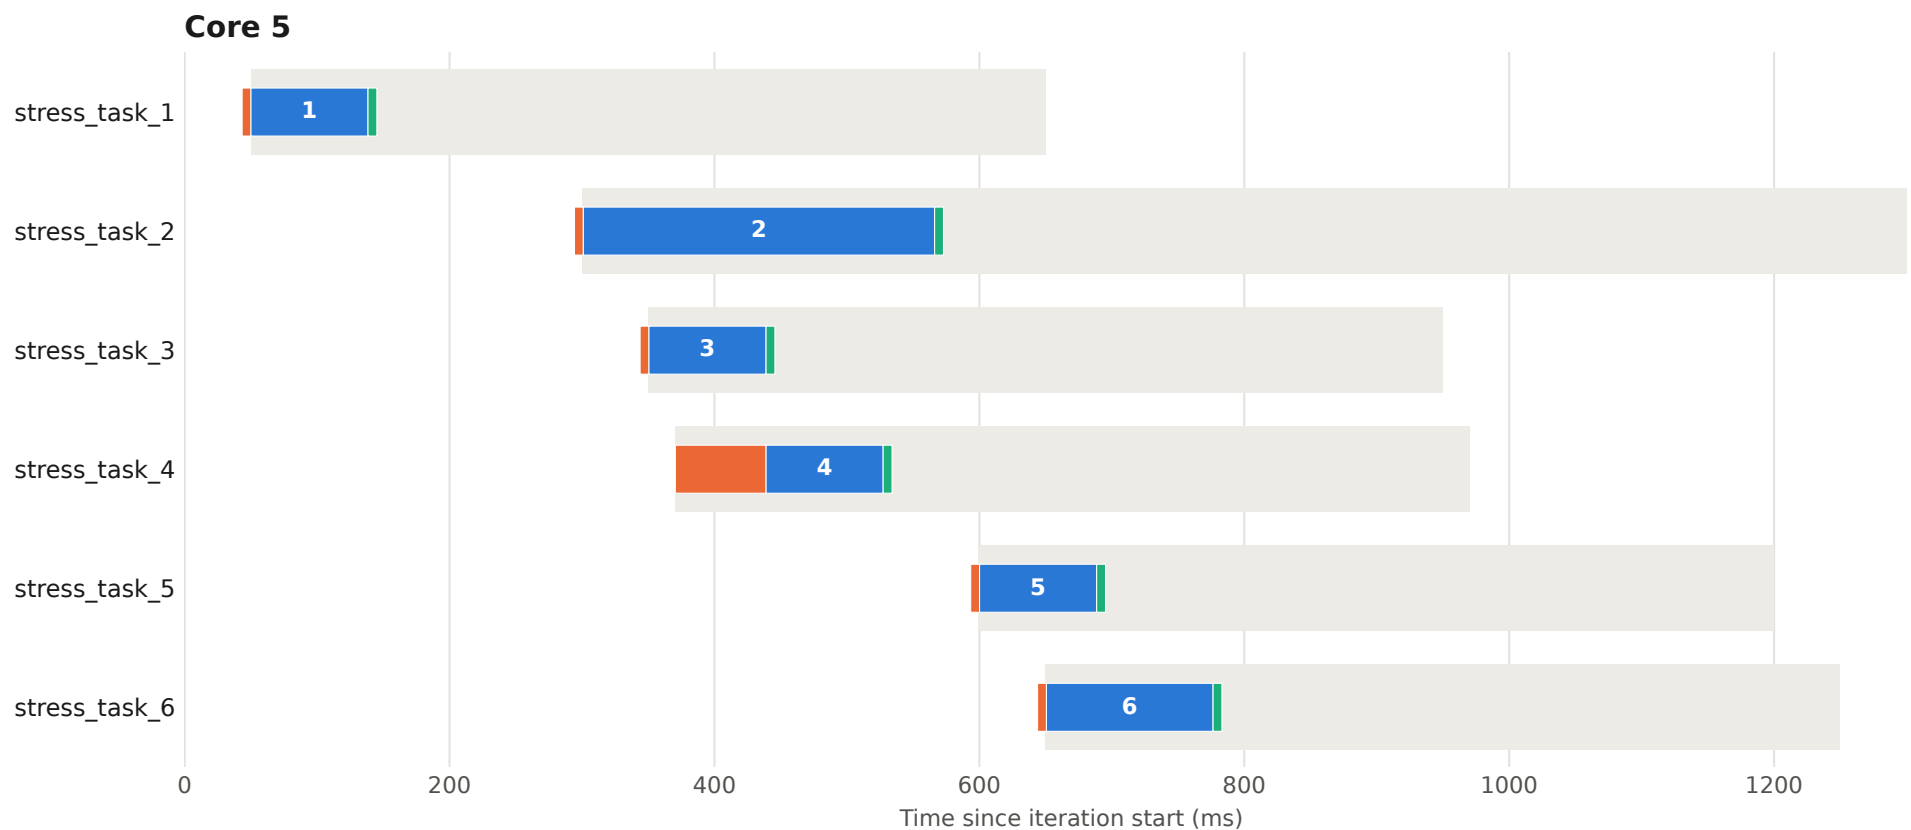


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 48

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

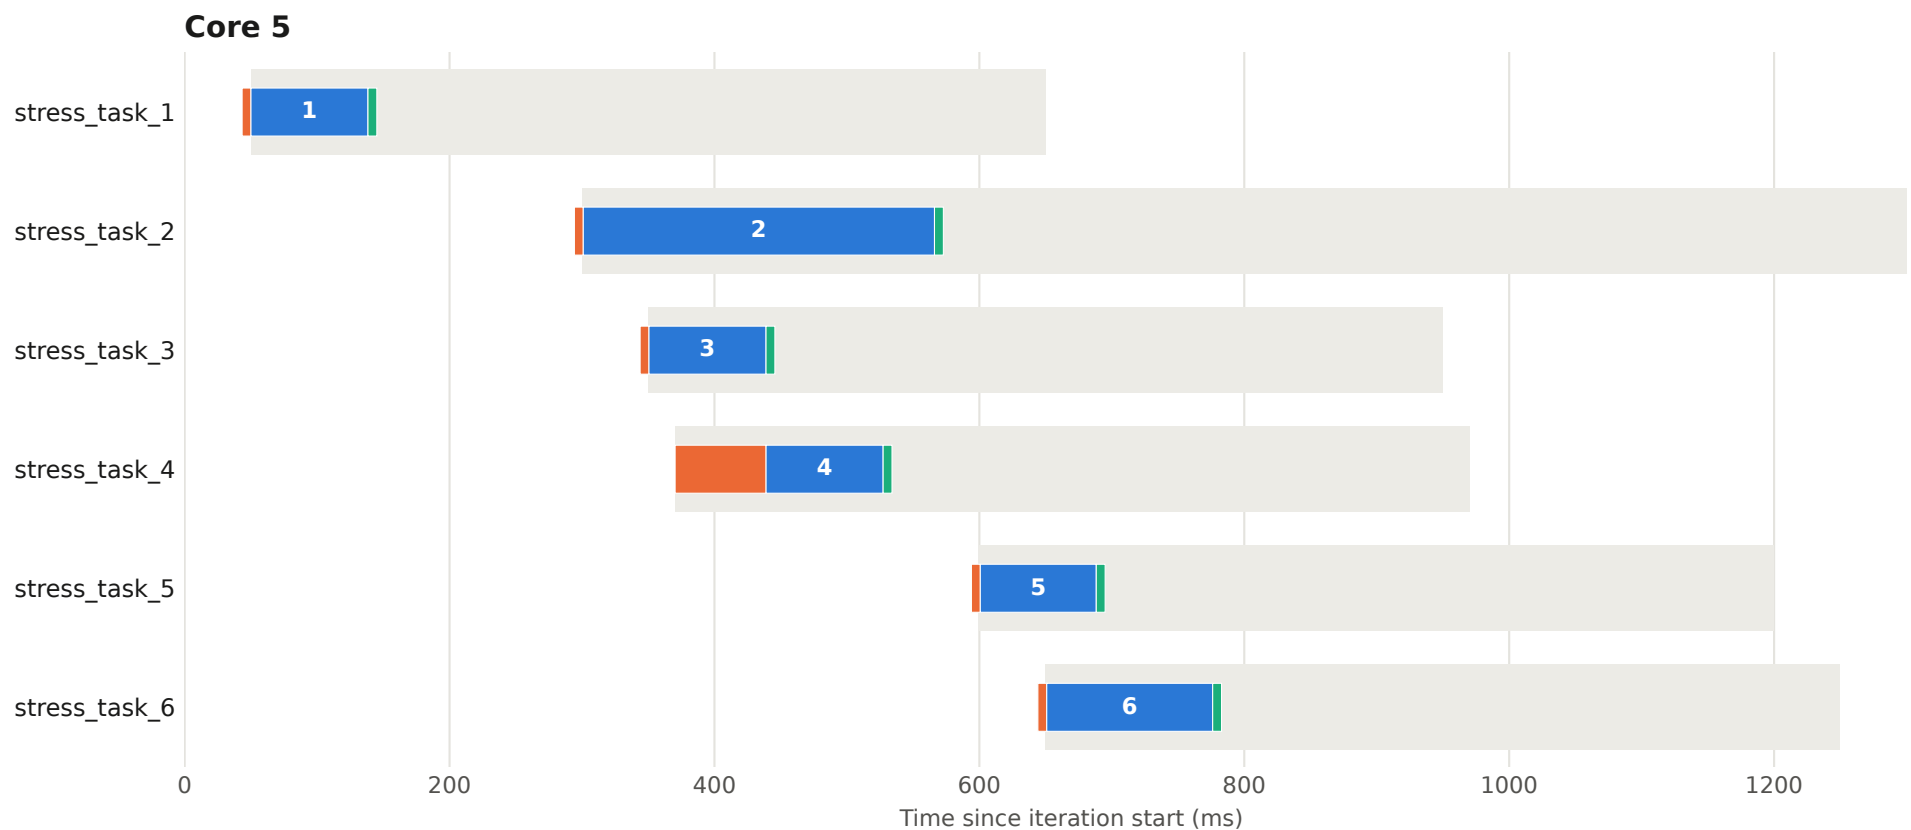


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 49

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

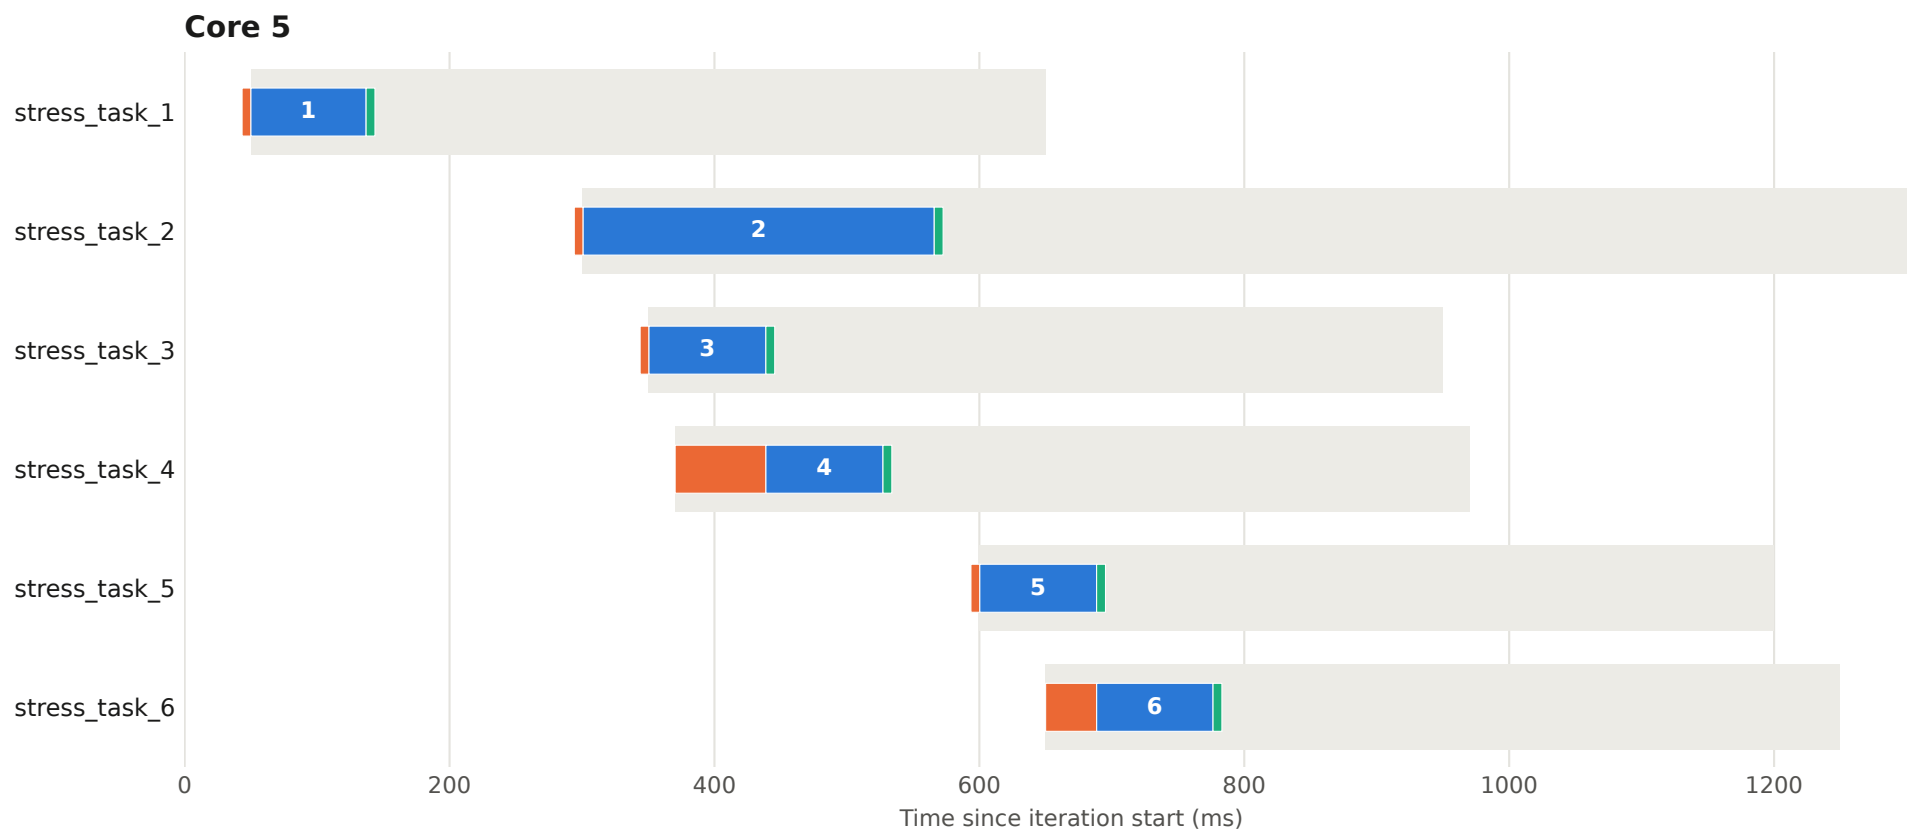


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 50

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

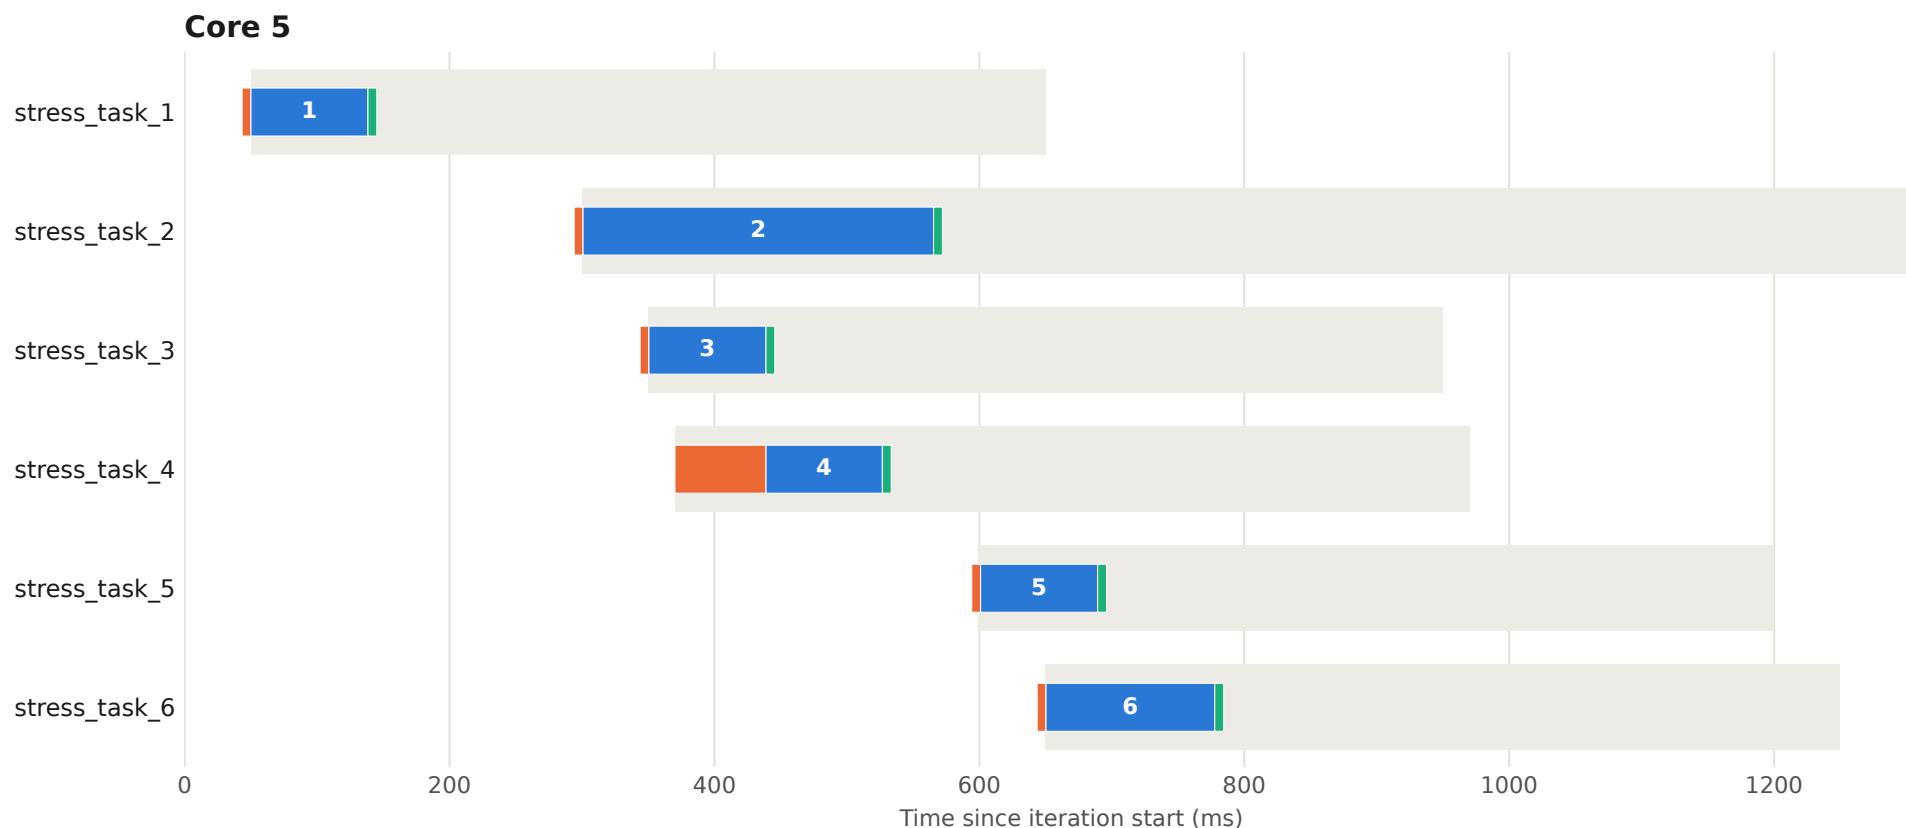


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 51

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

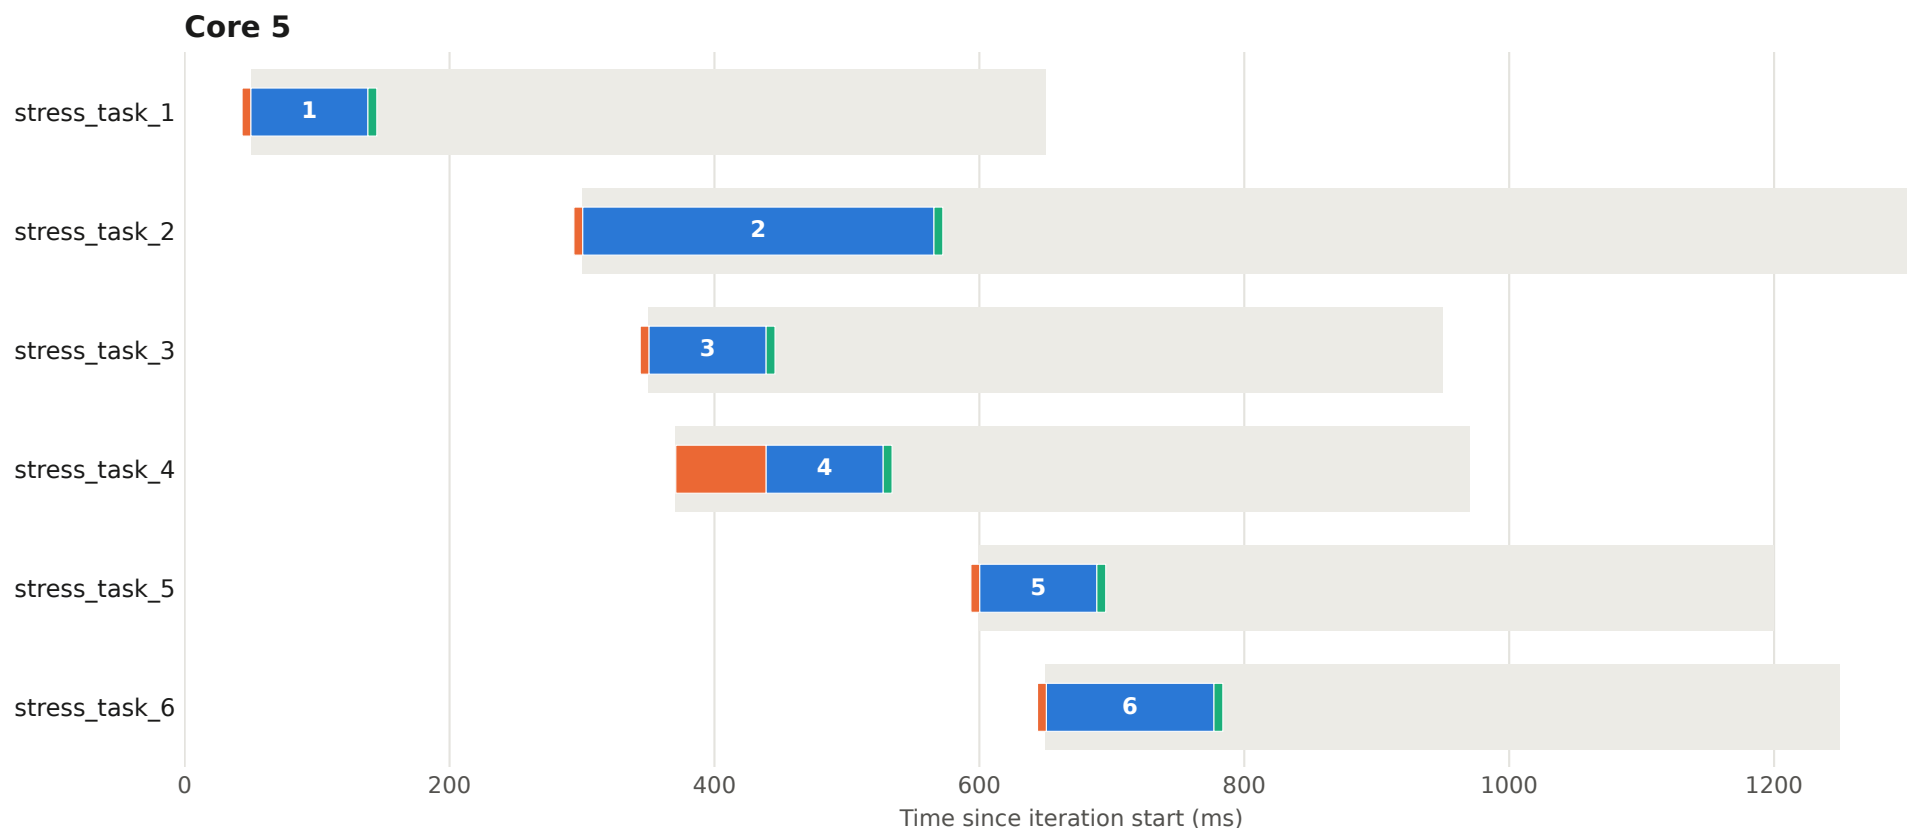


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 52

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

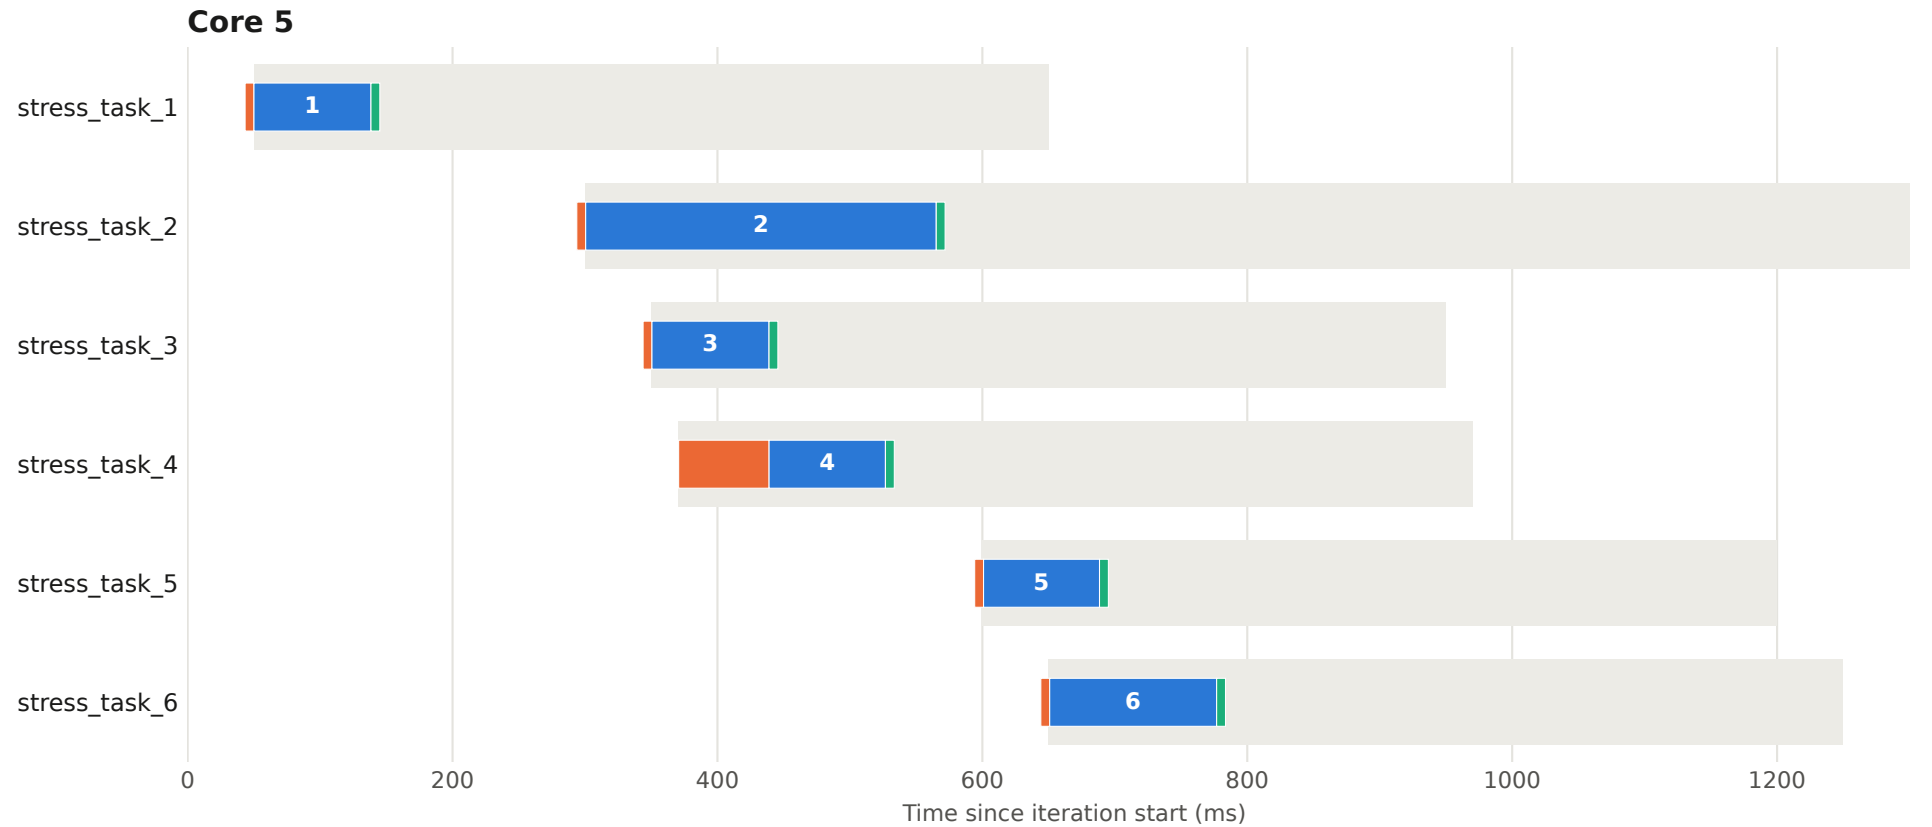


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 53

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

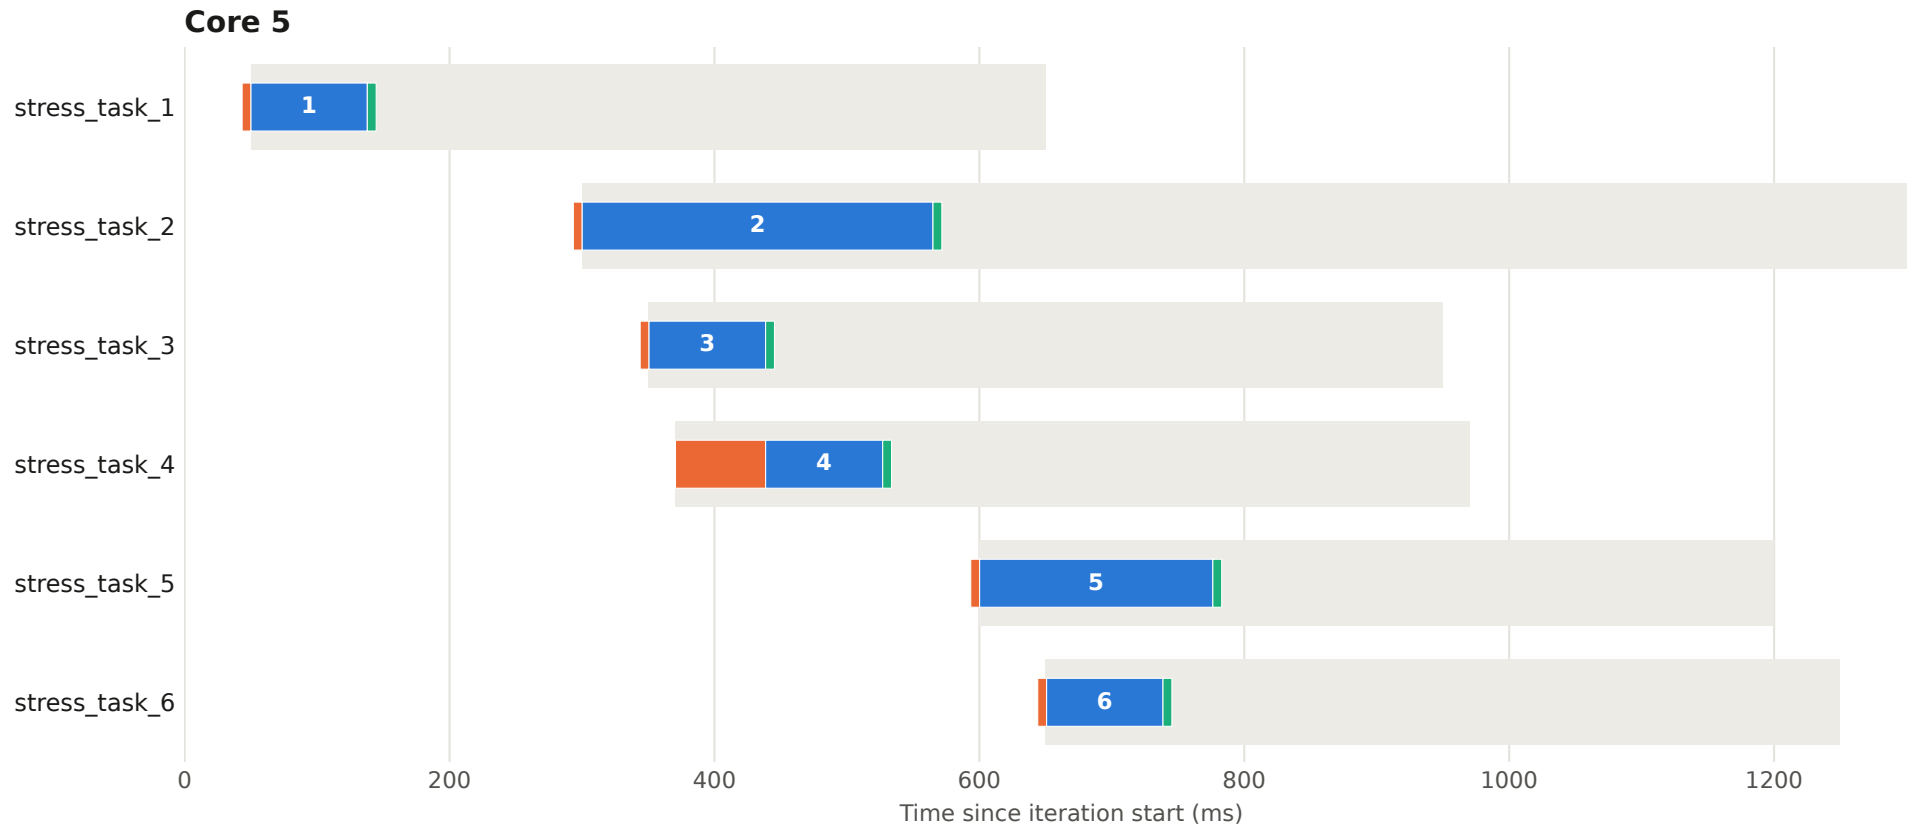


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 54

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

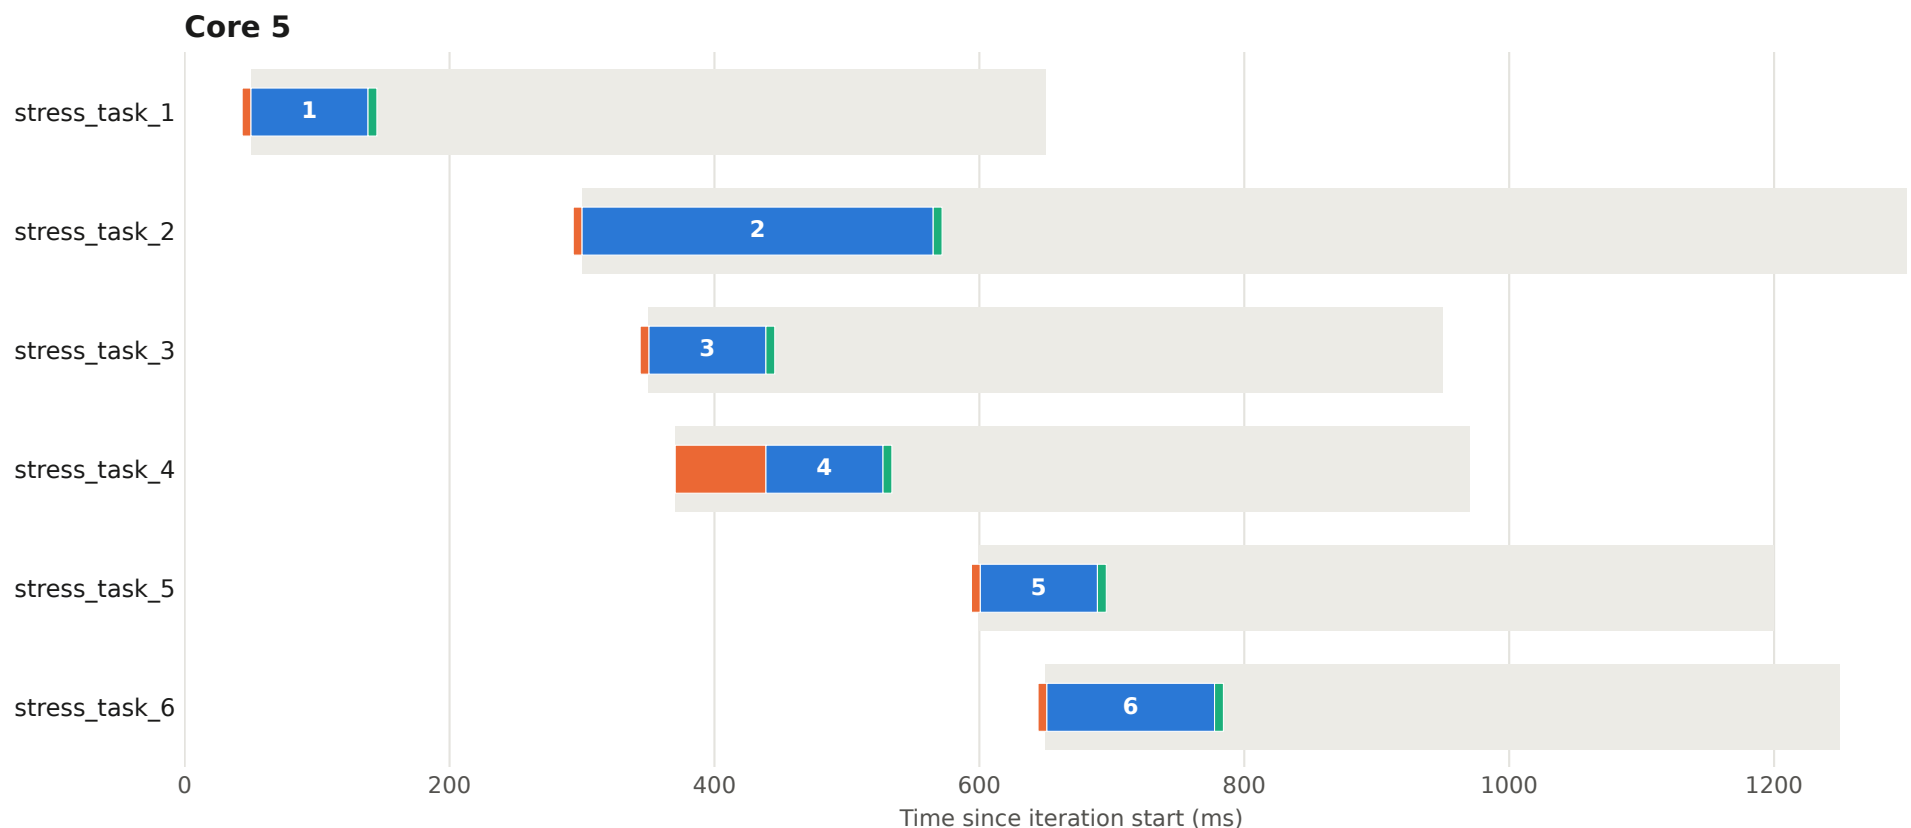


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 55

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

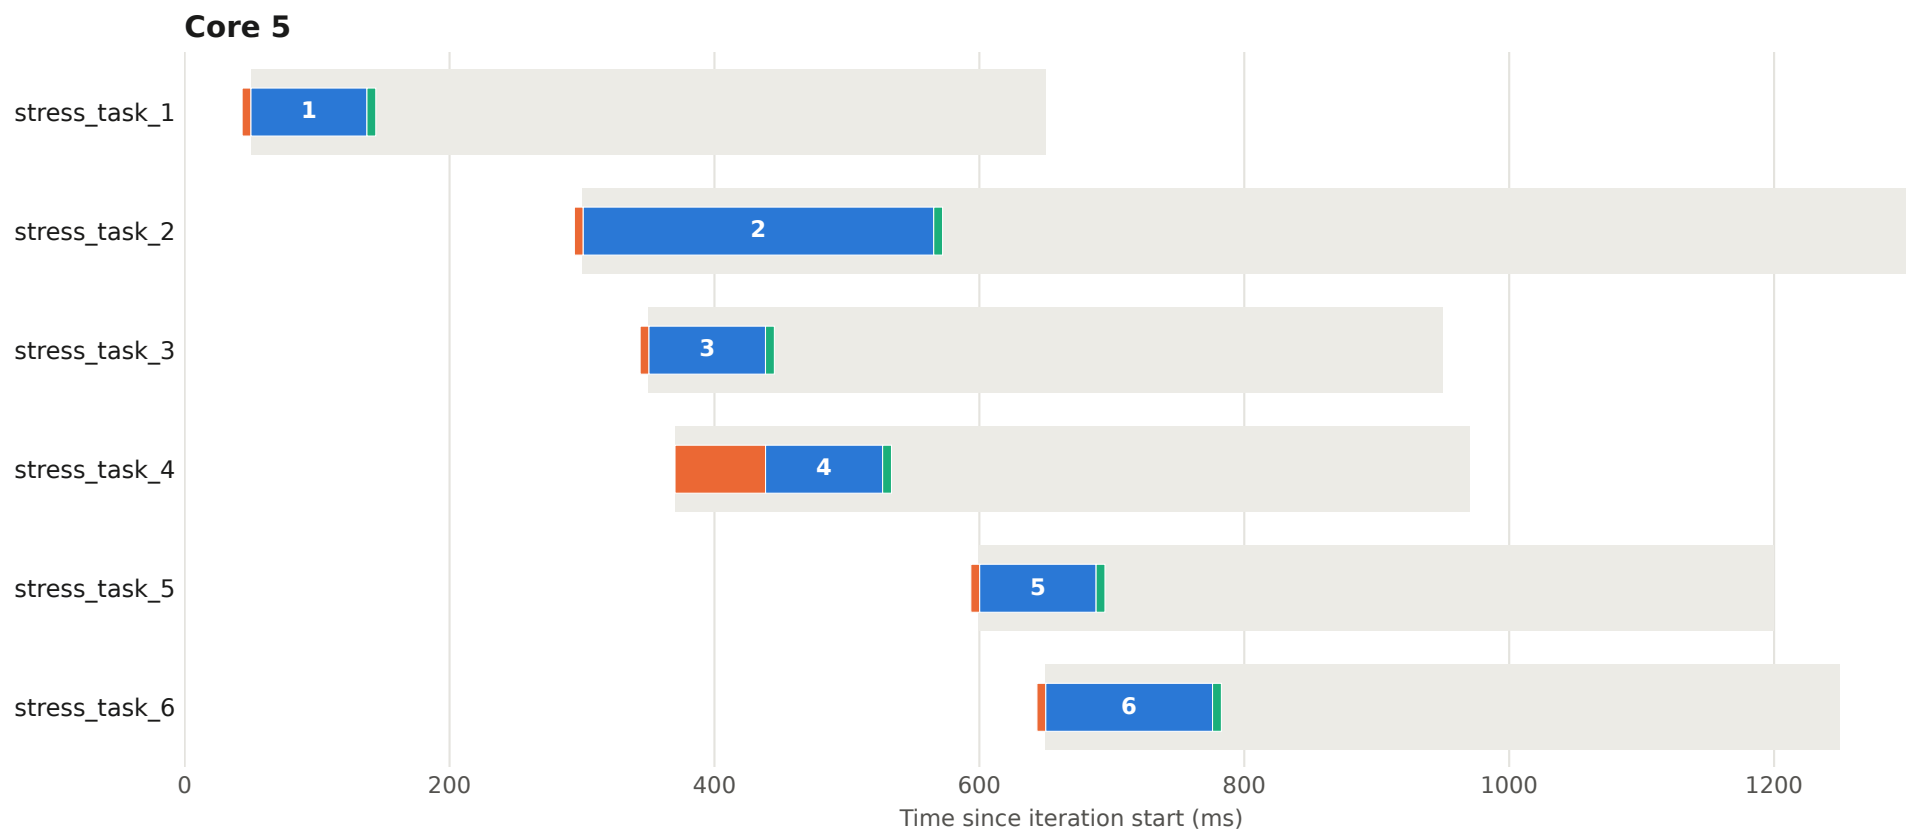


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 56

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

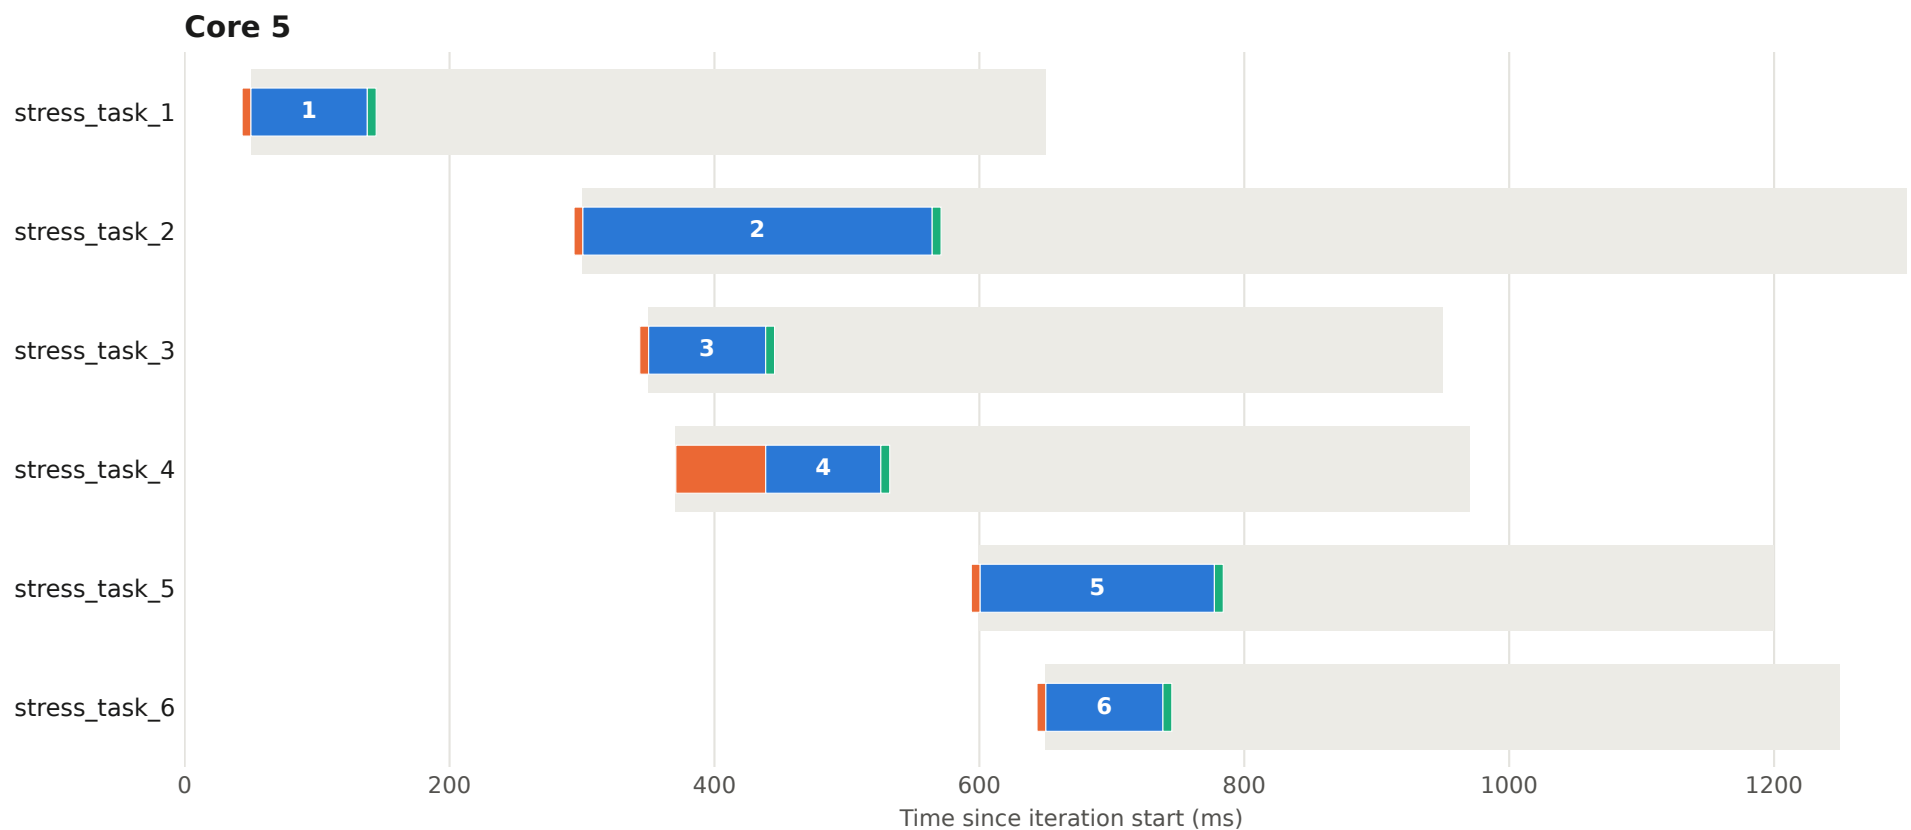


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 57

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

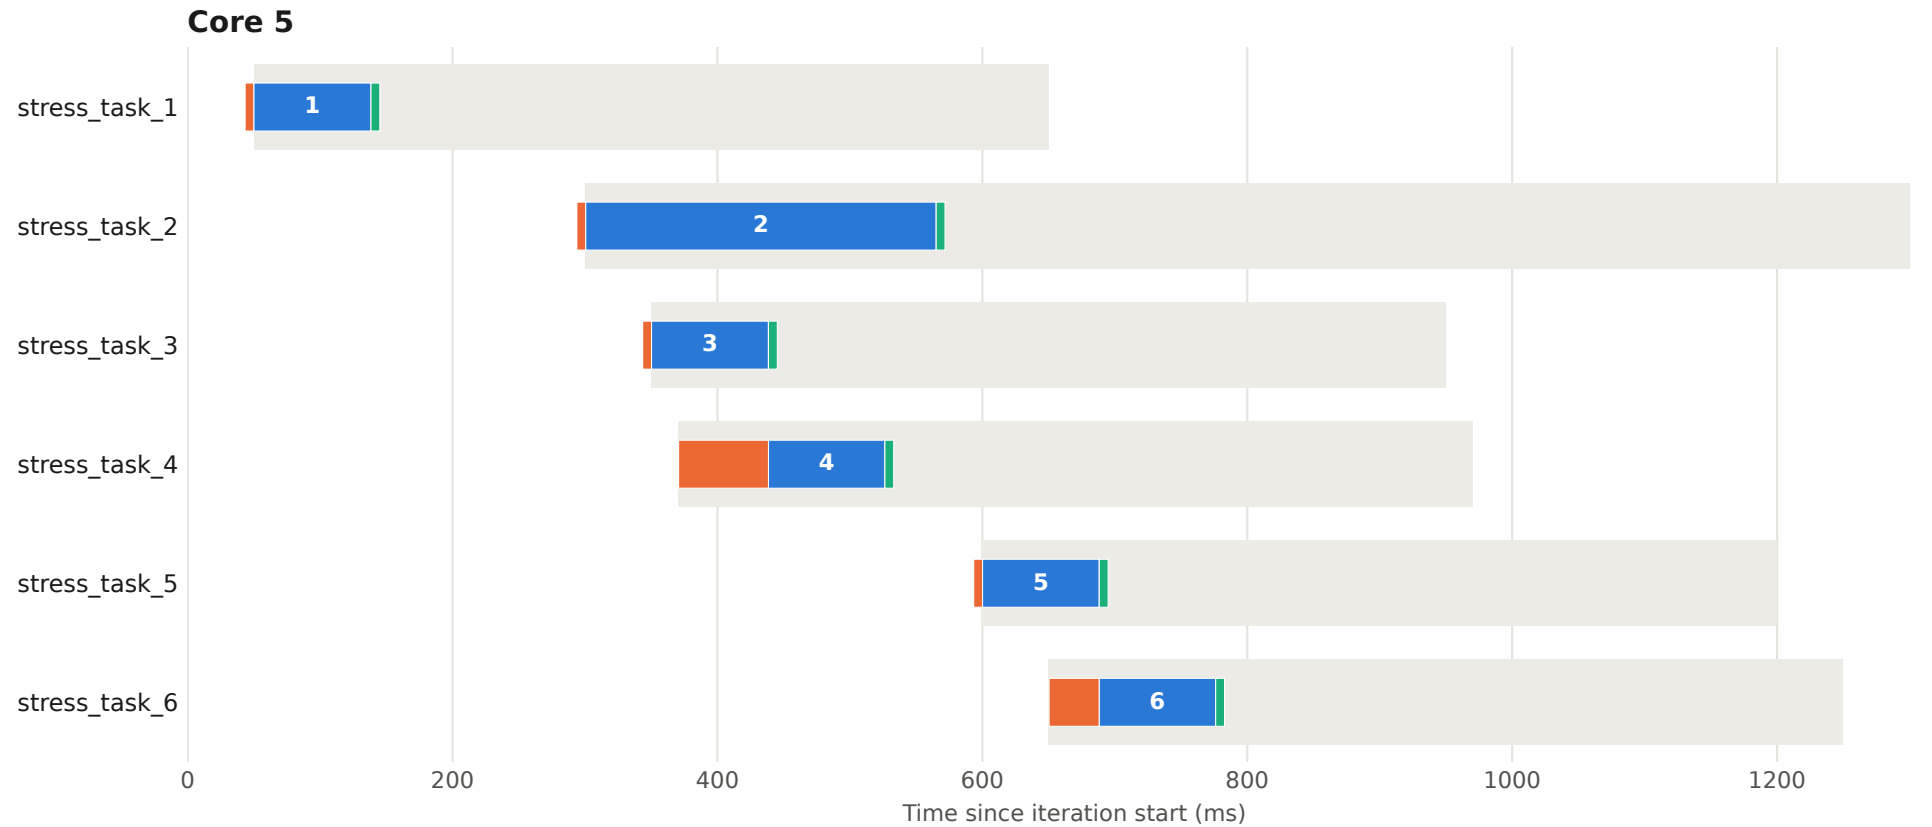


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 58

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

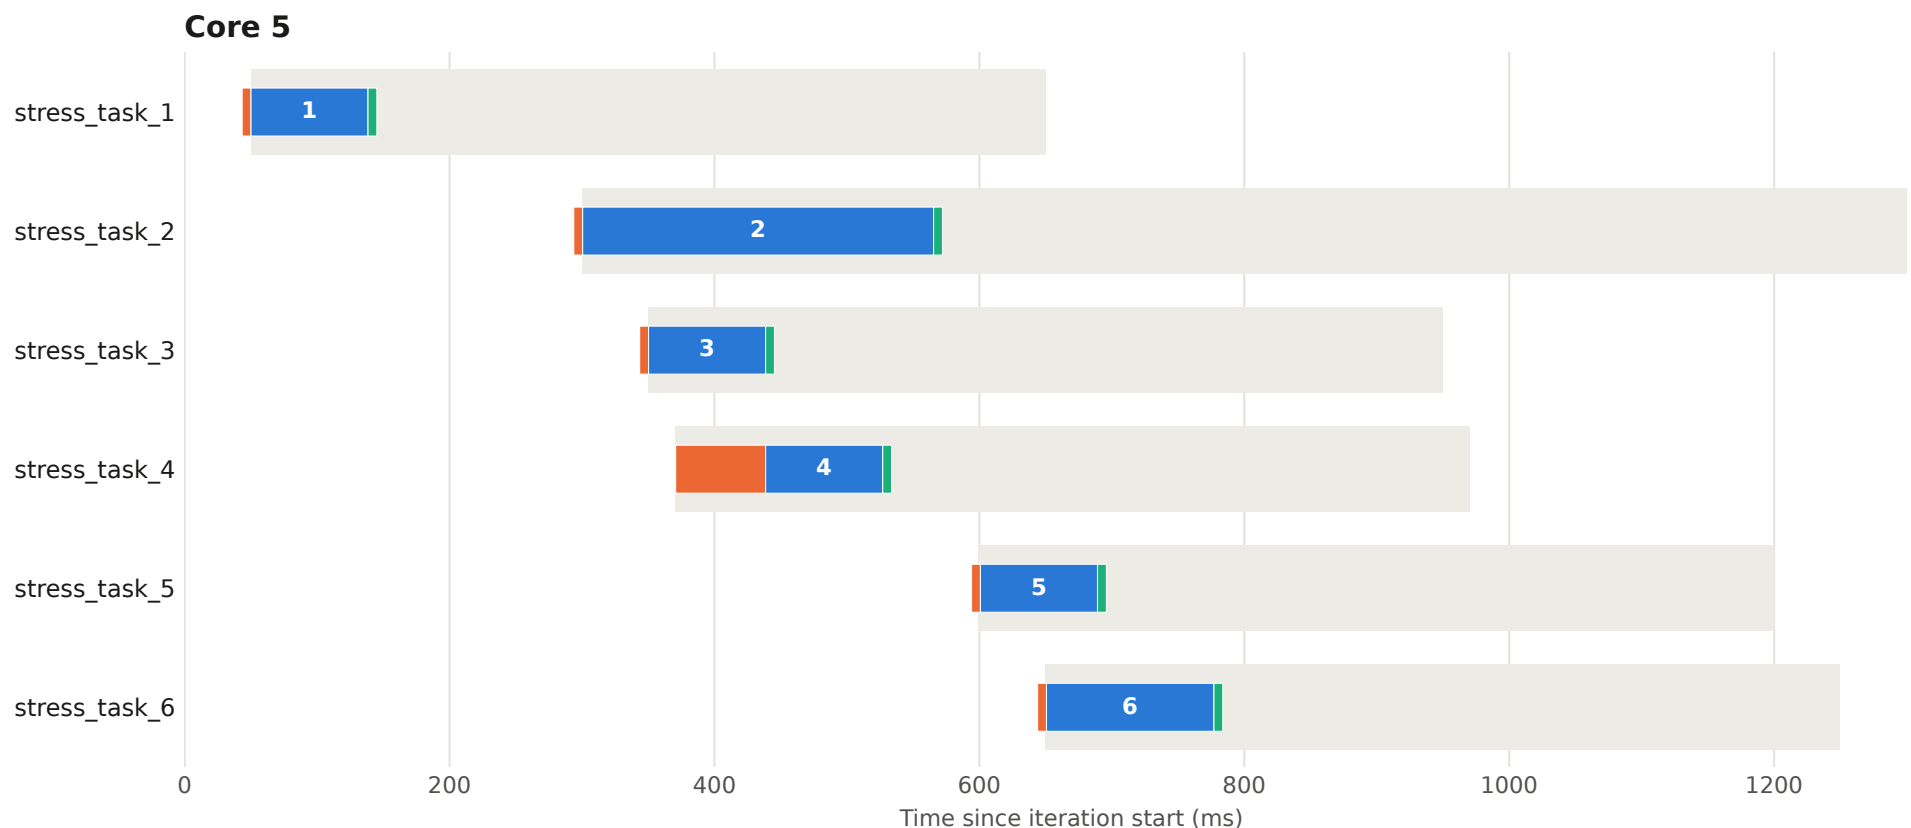


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 59

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

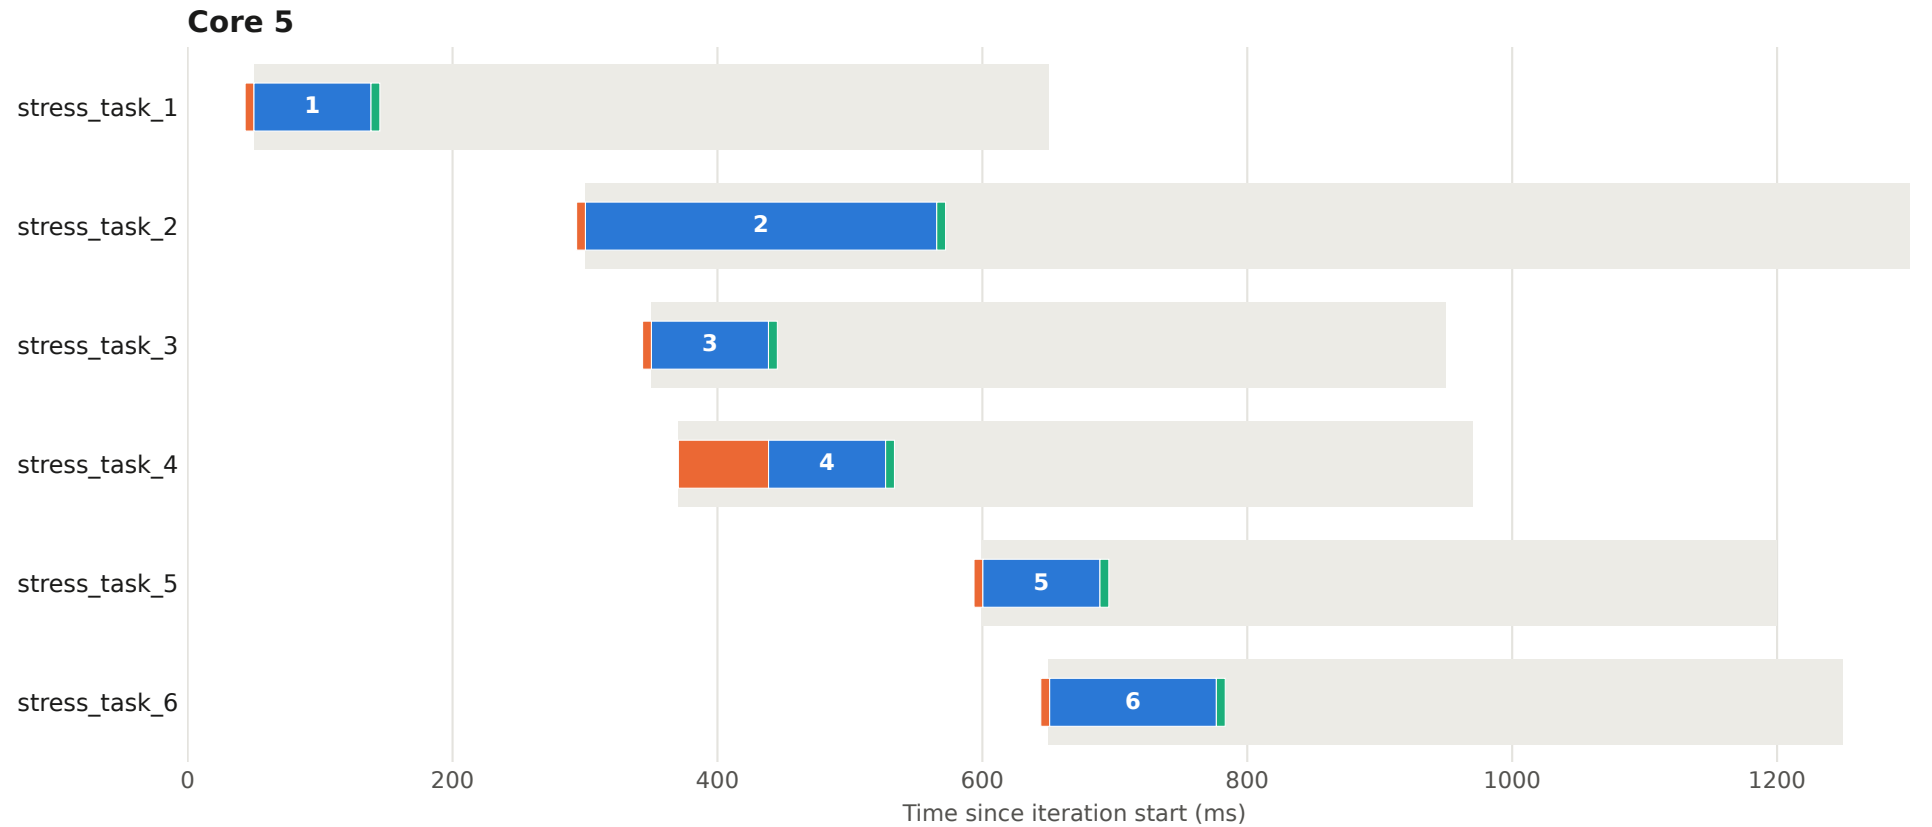


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 60

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

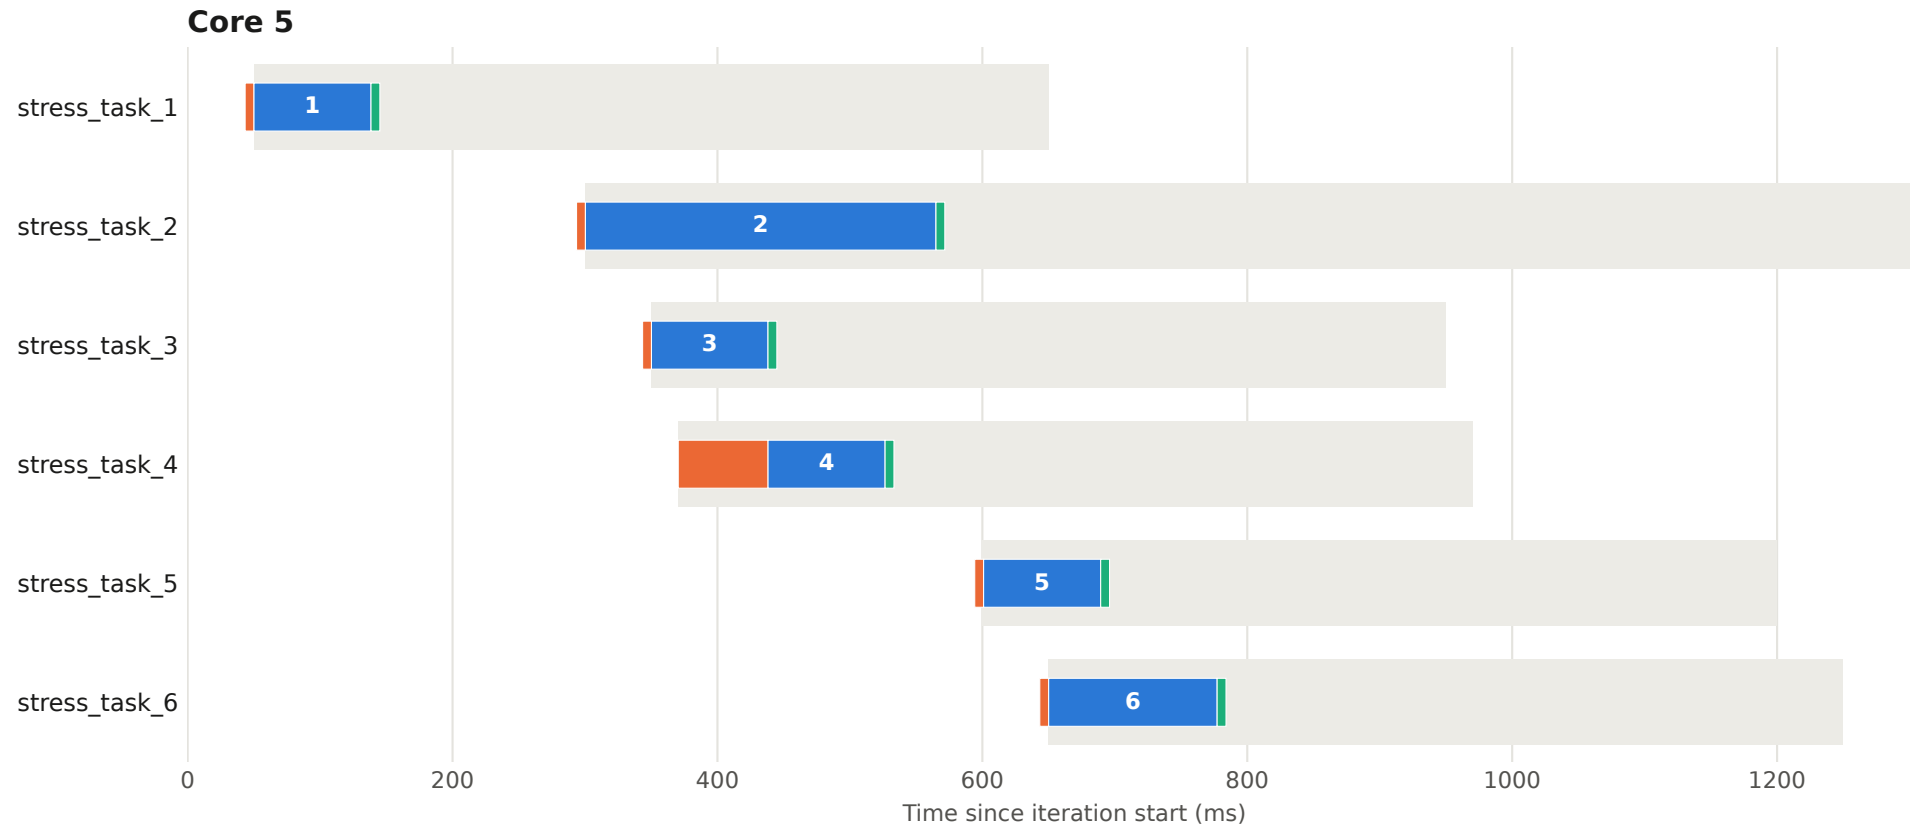


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 61

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

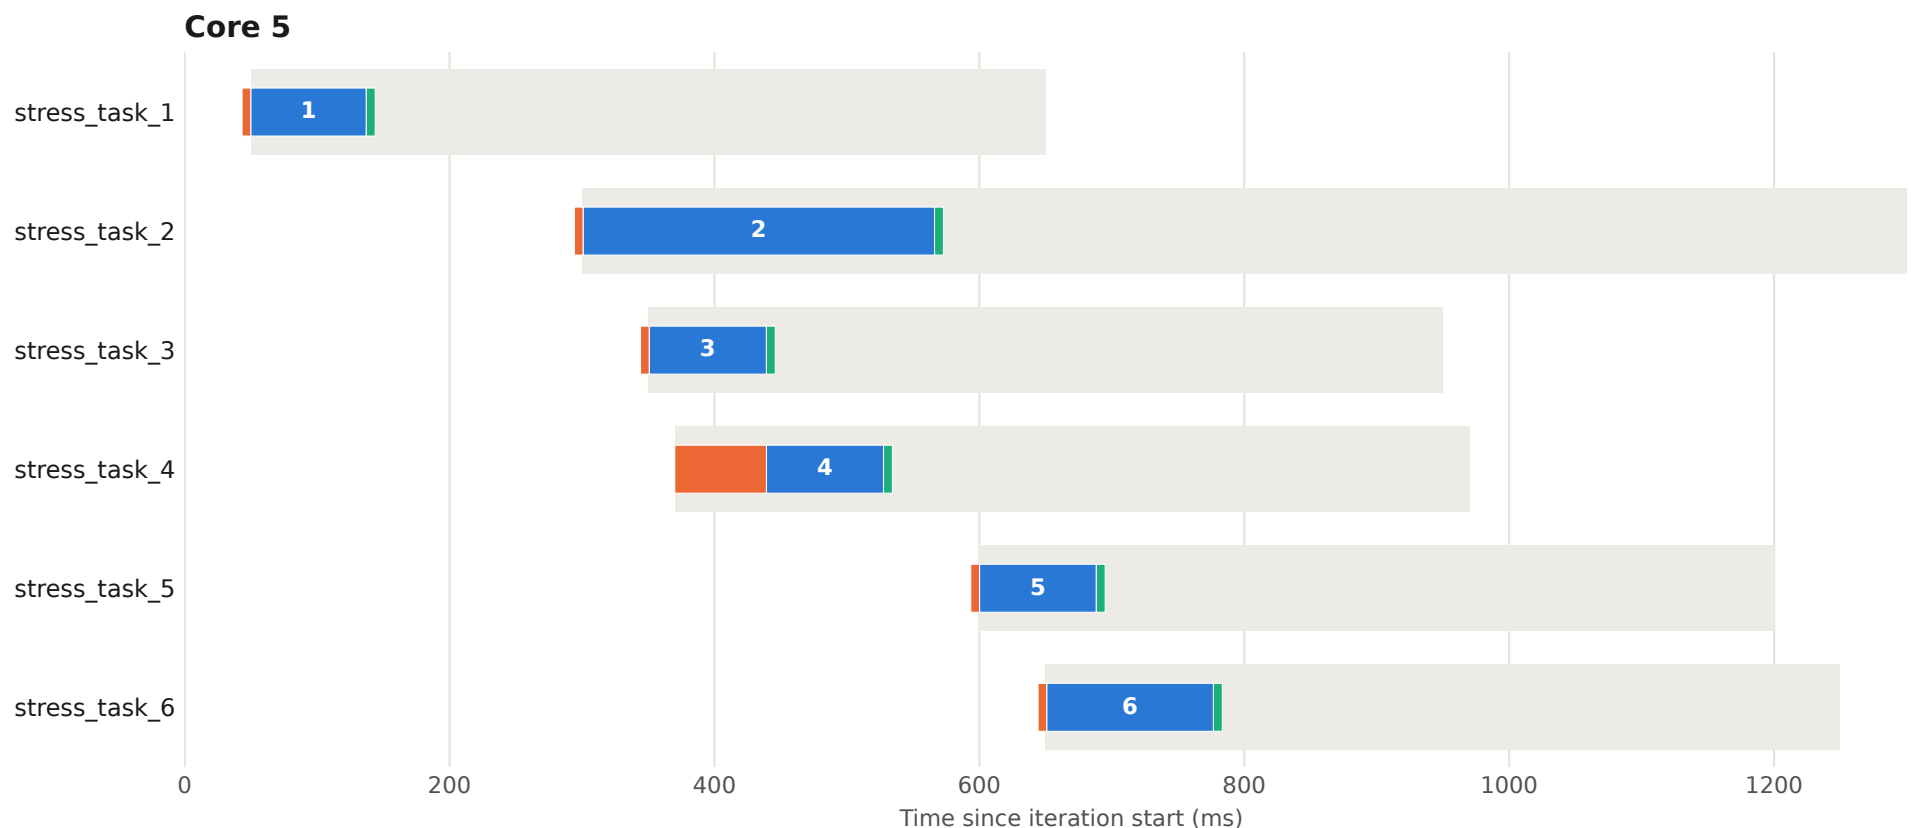


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 62

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

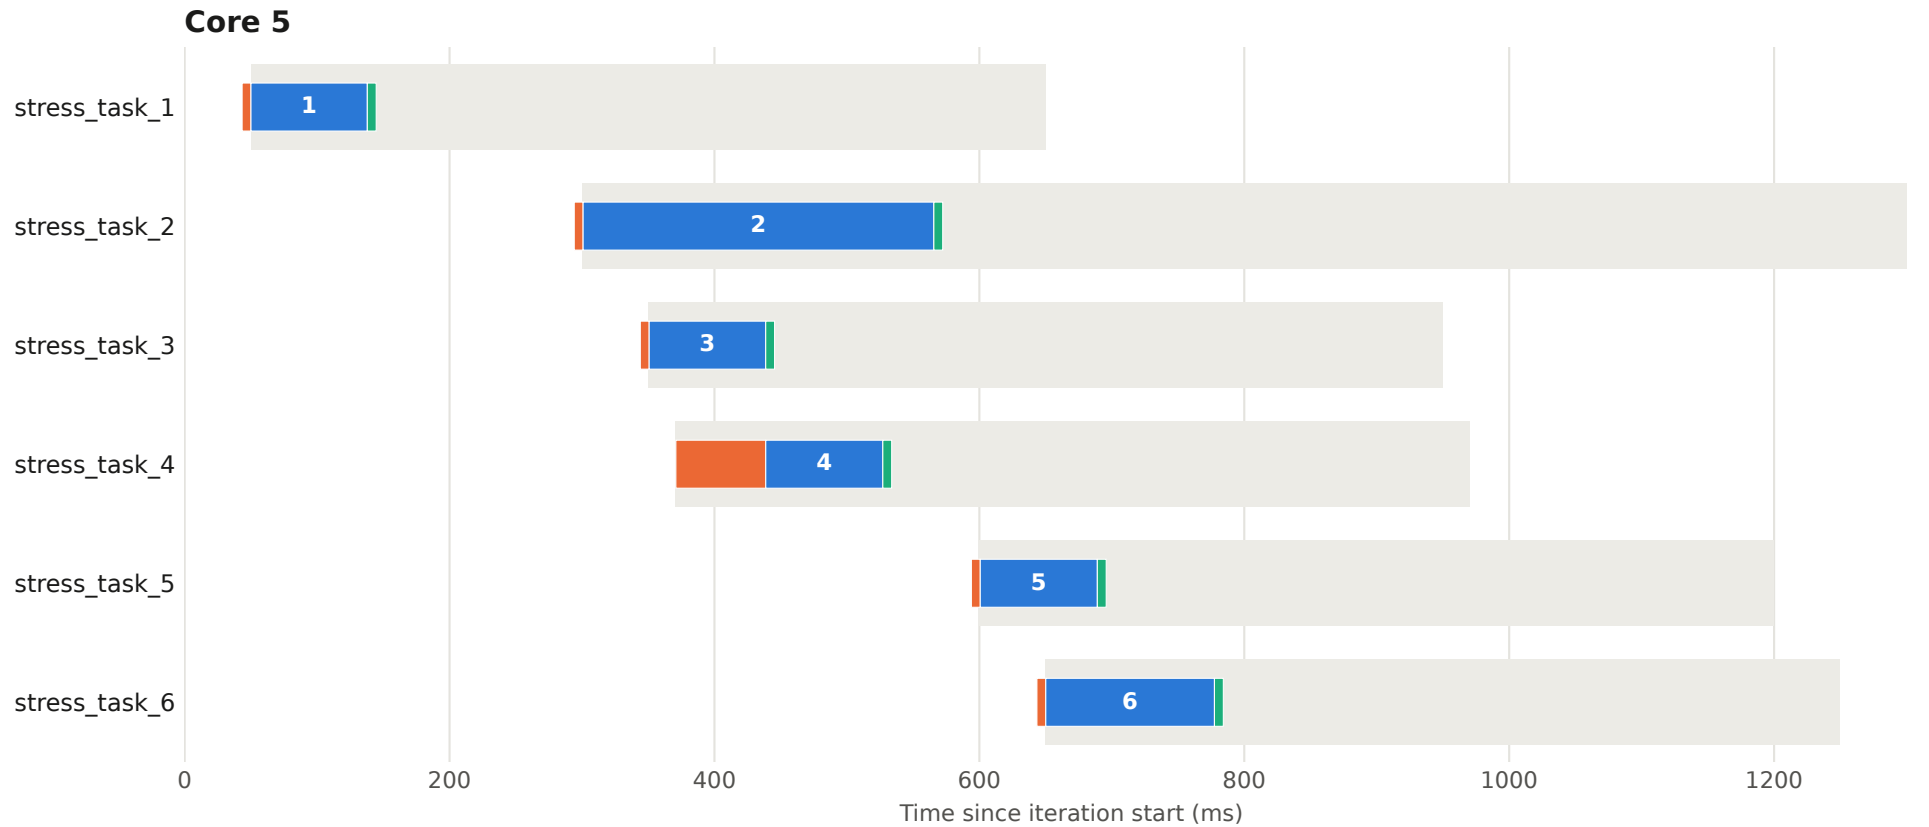


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 63

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

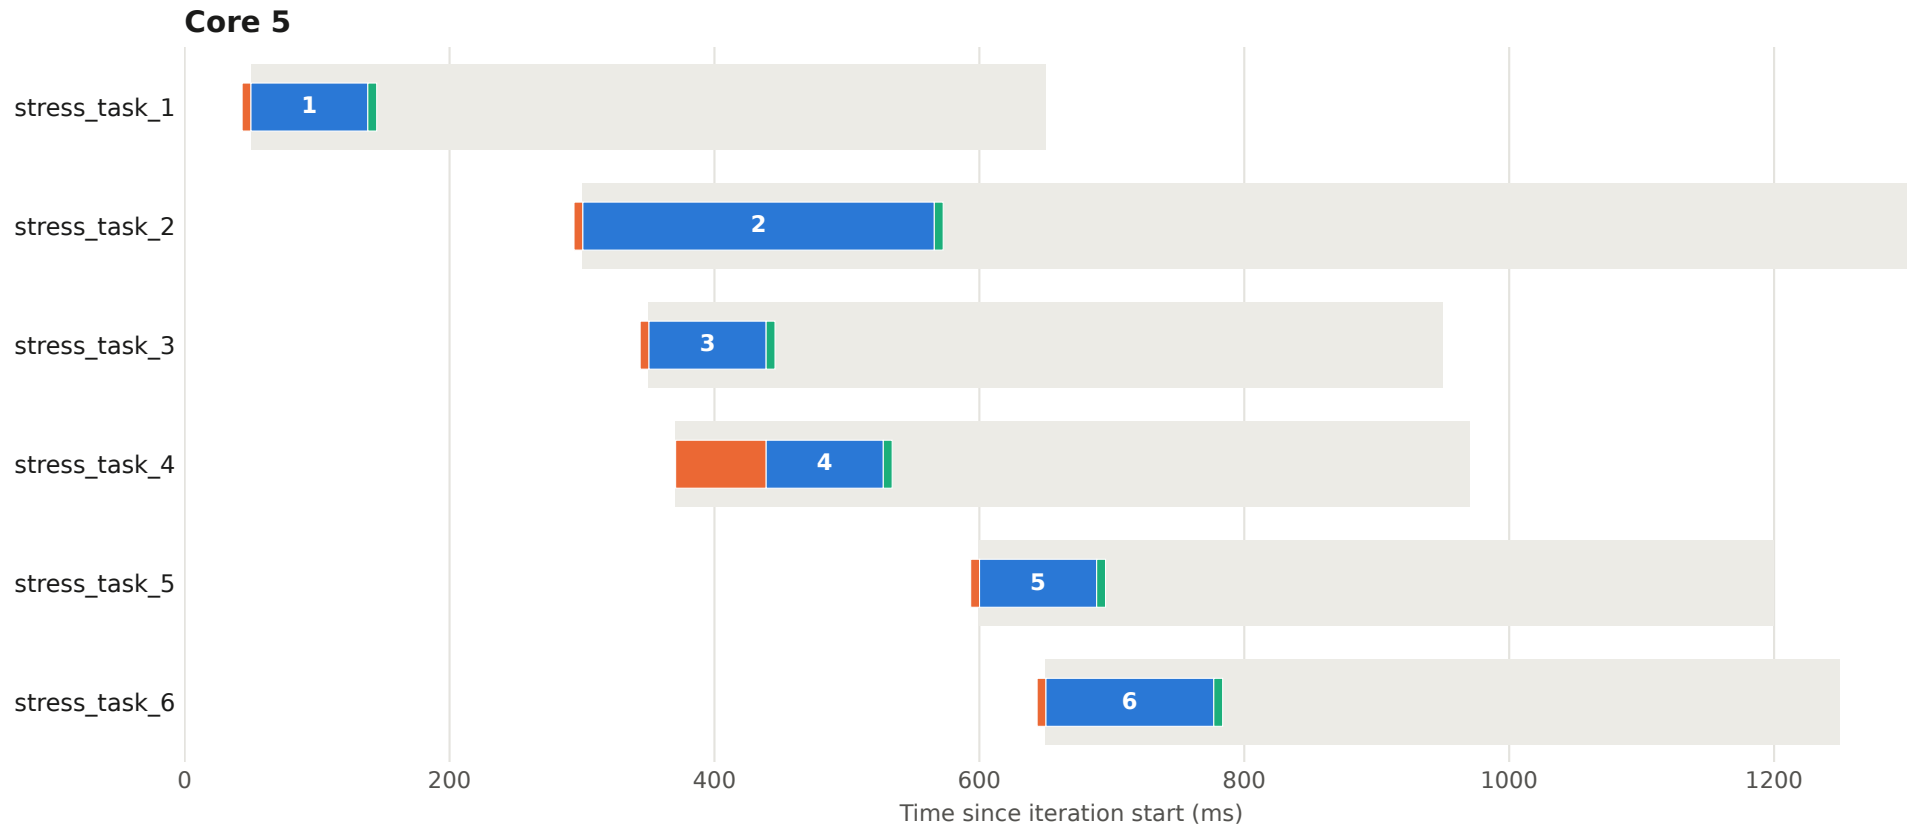


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 64

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

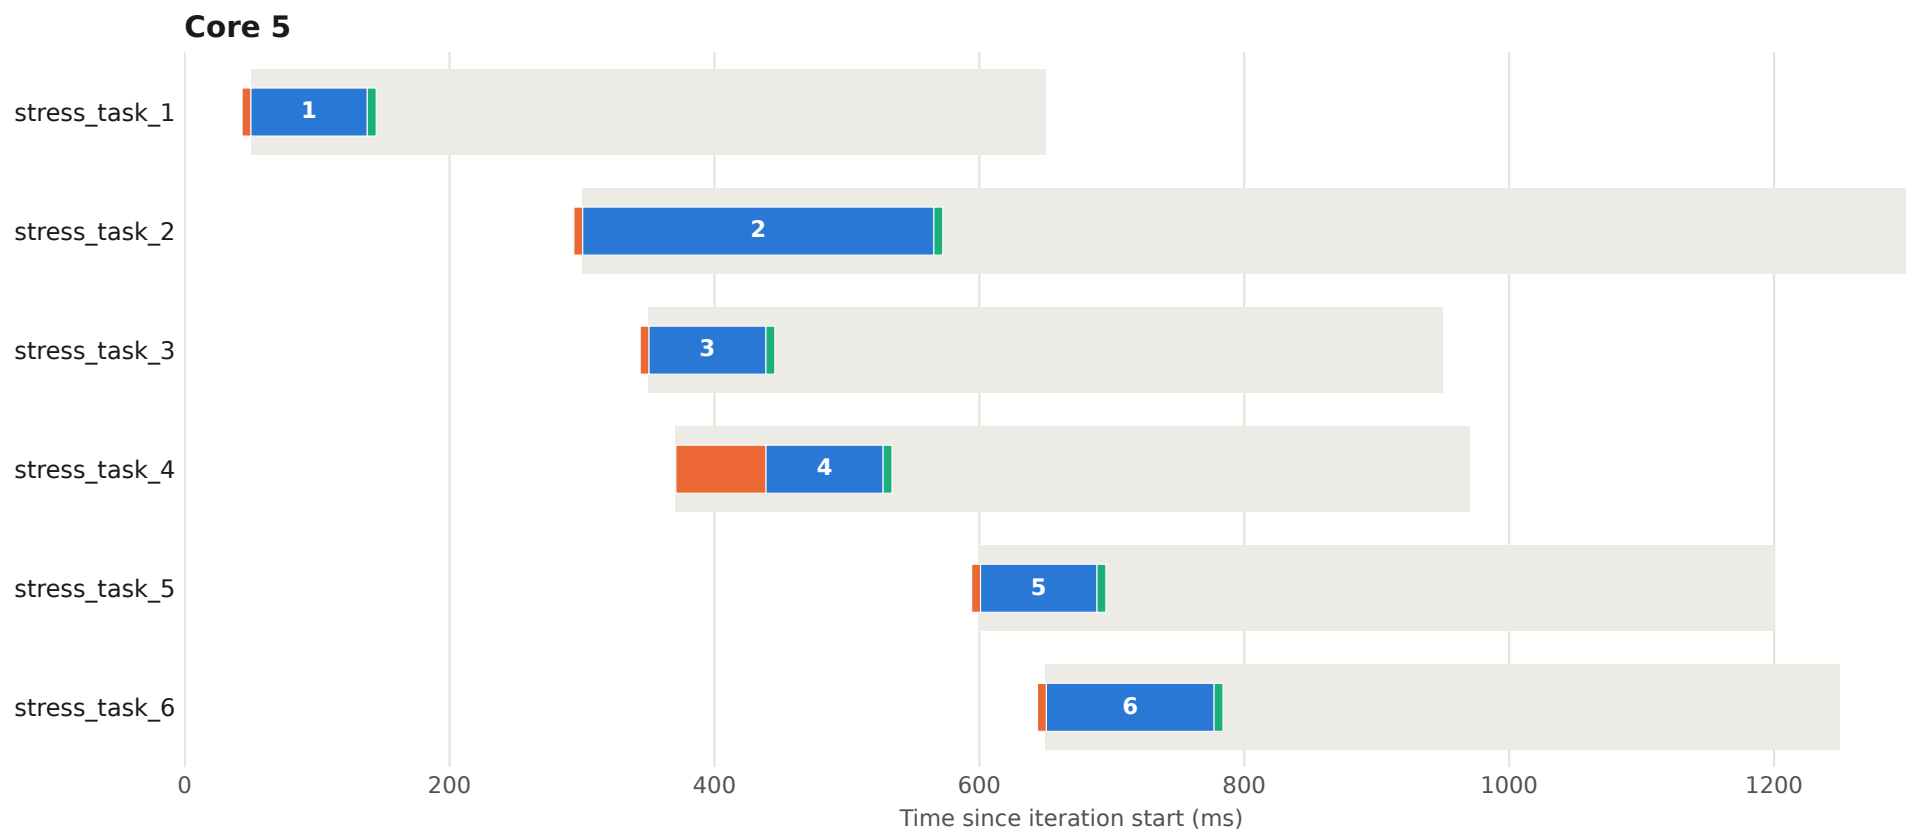


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 65

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

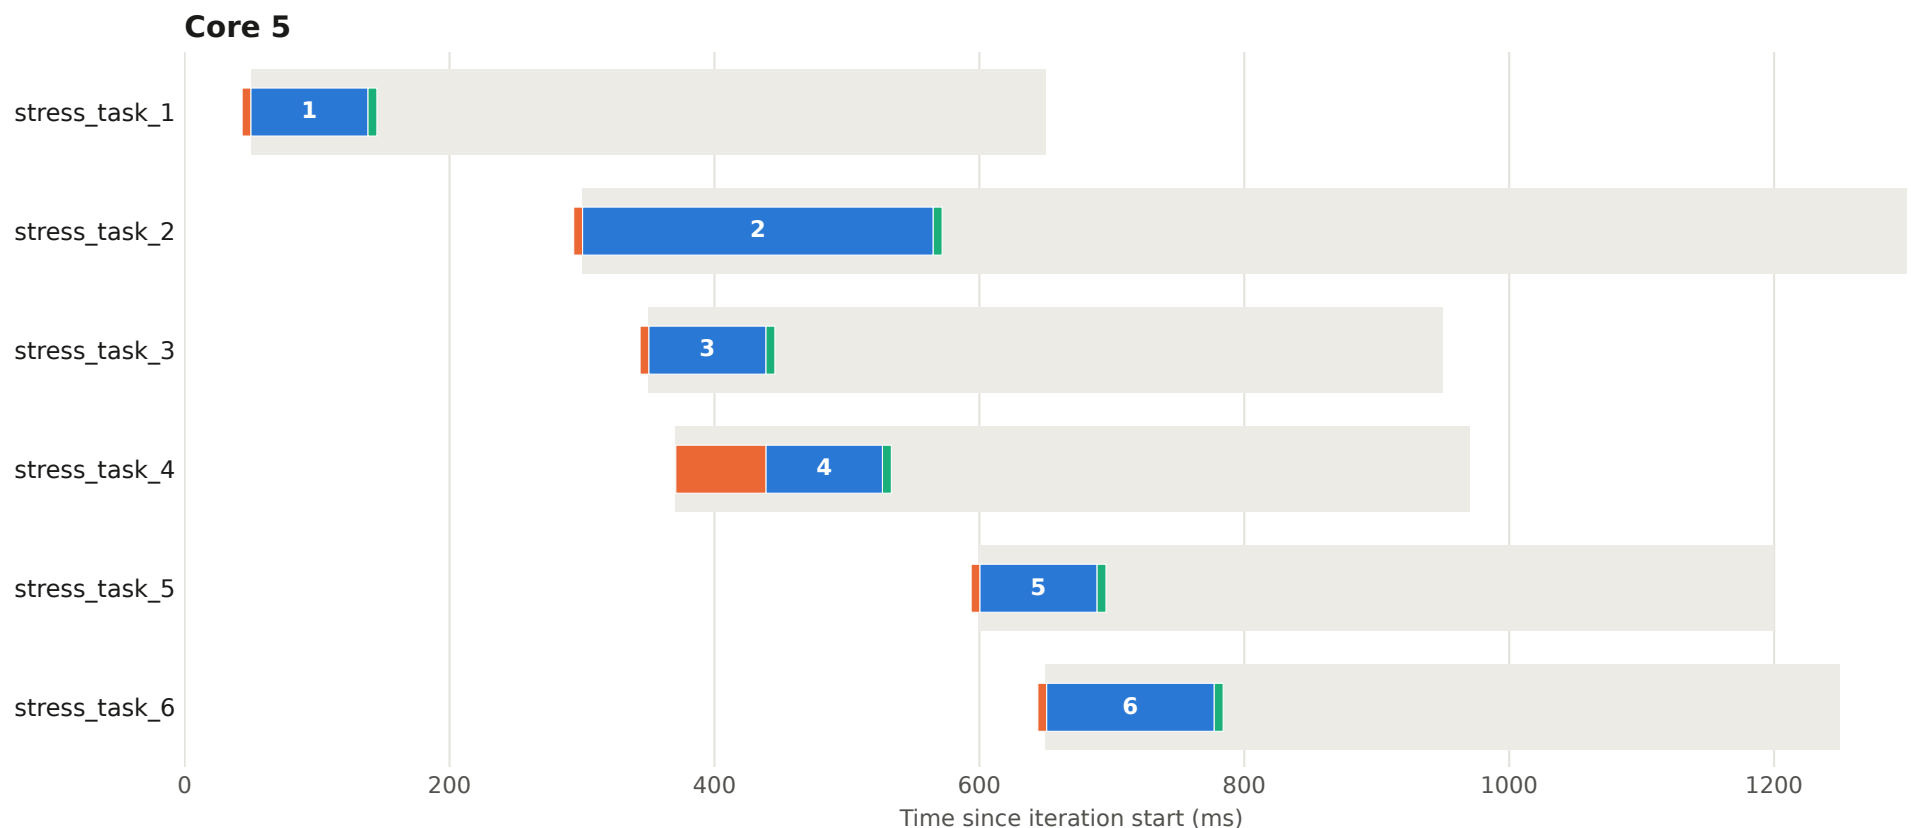


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 66

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

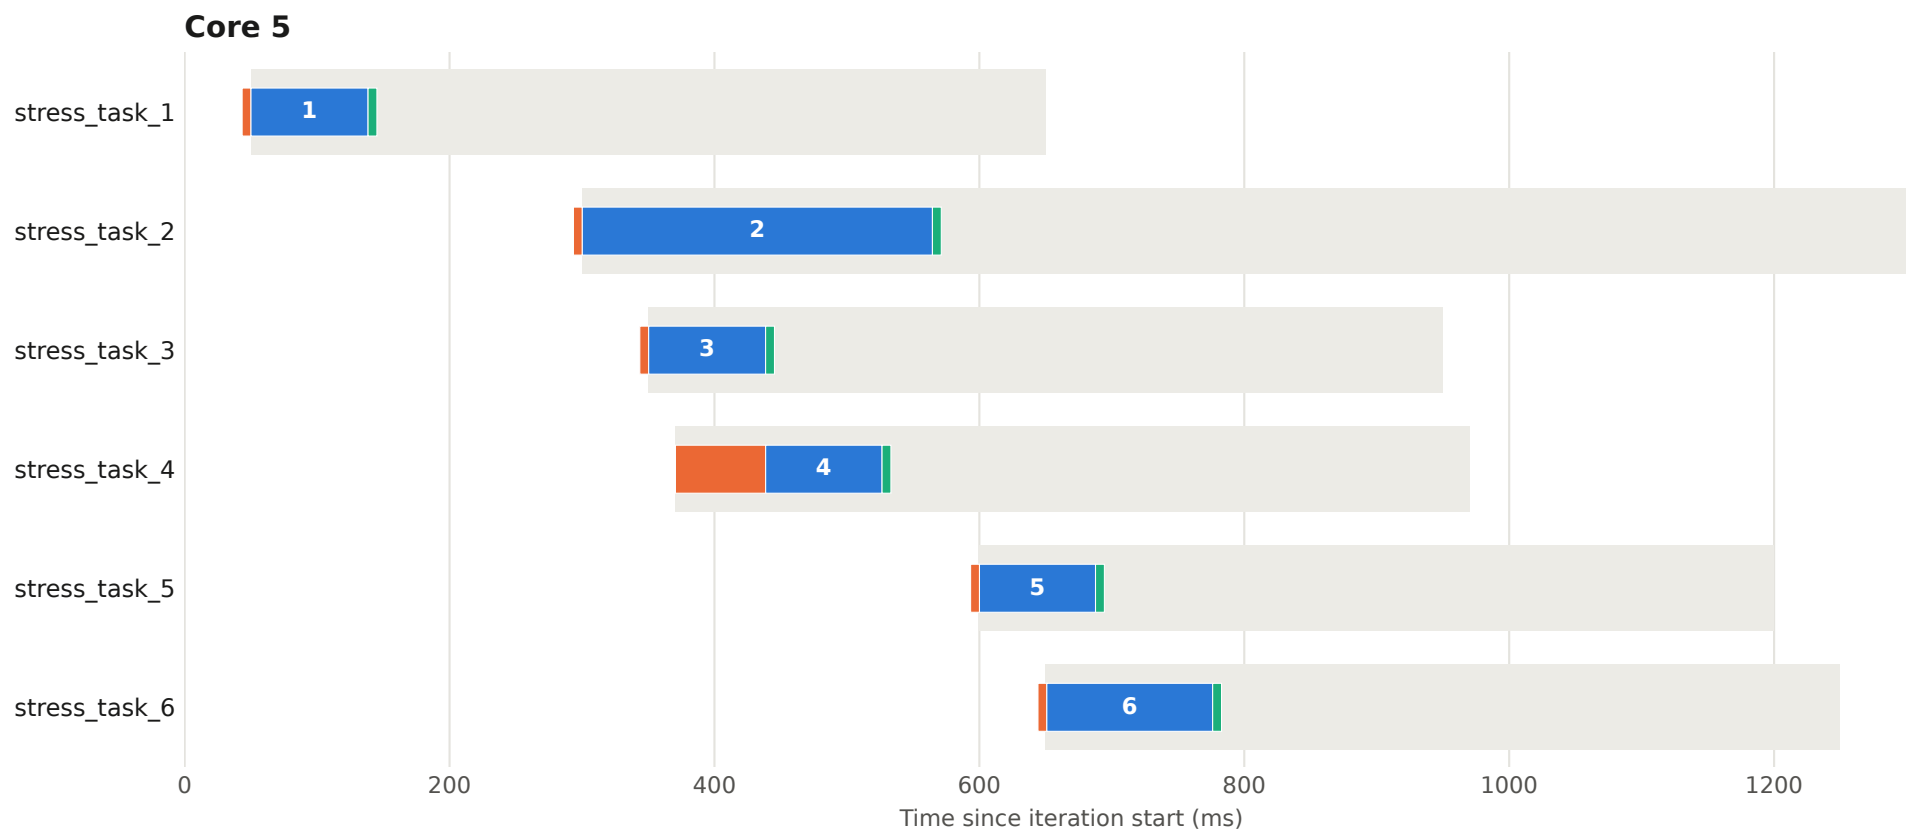


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 67

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

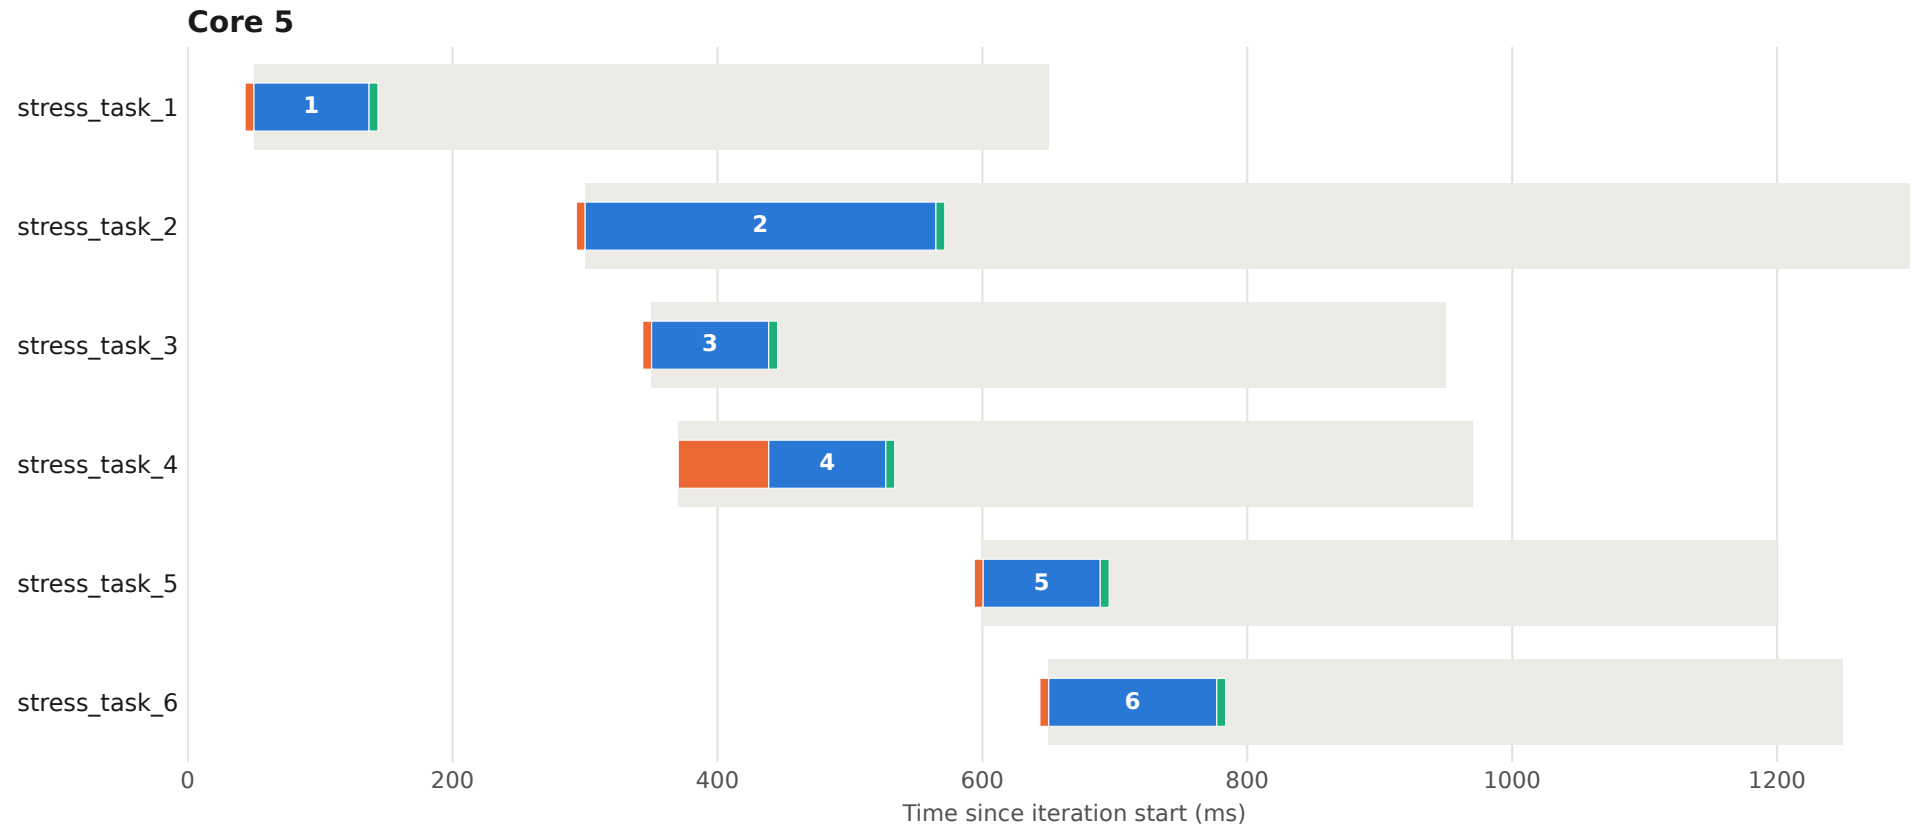


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 68

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

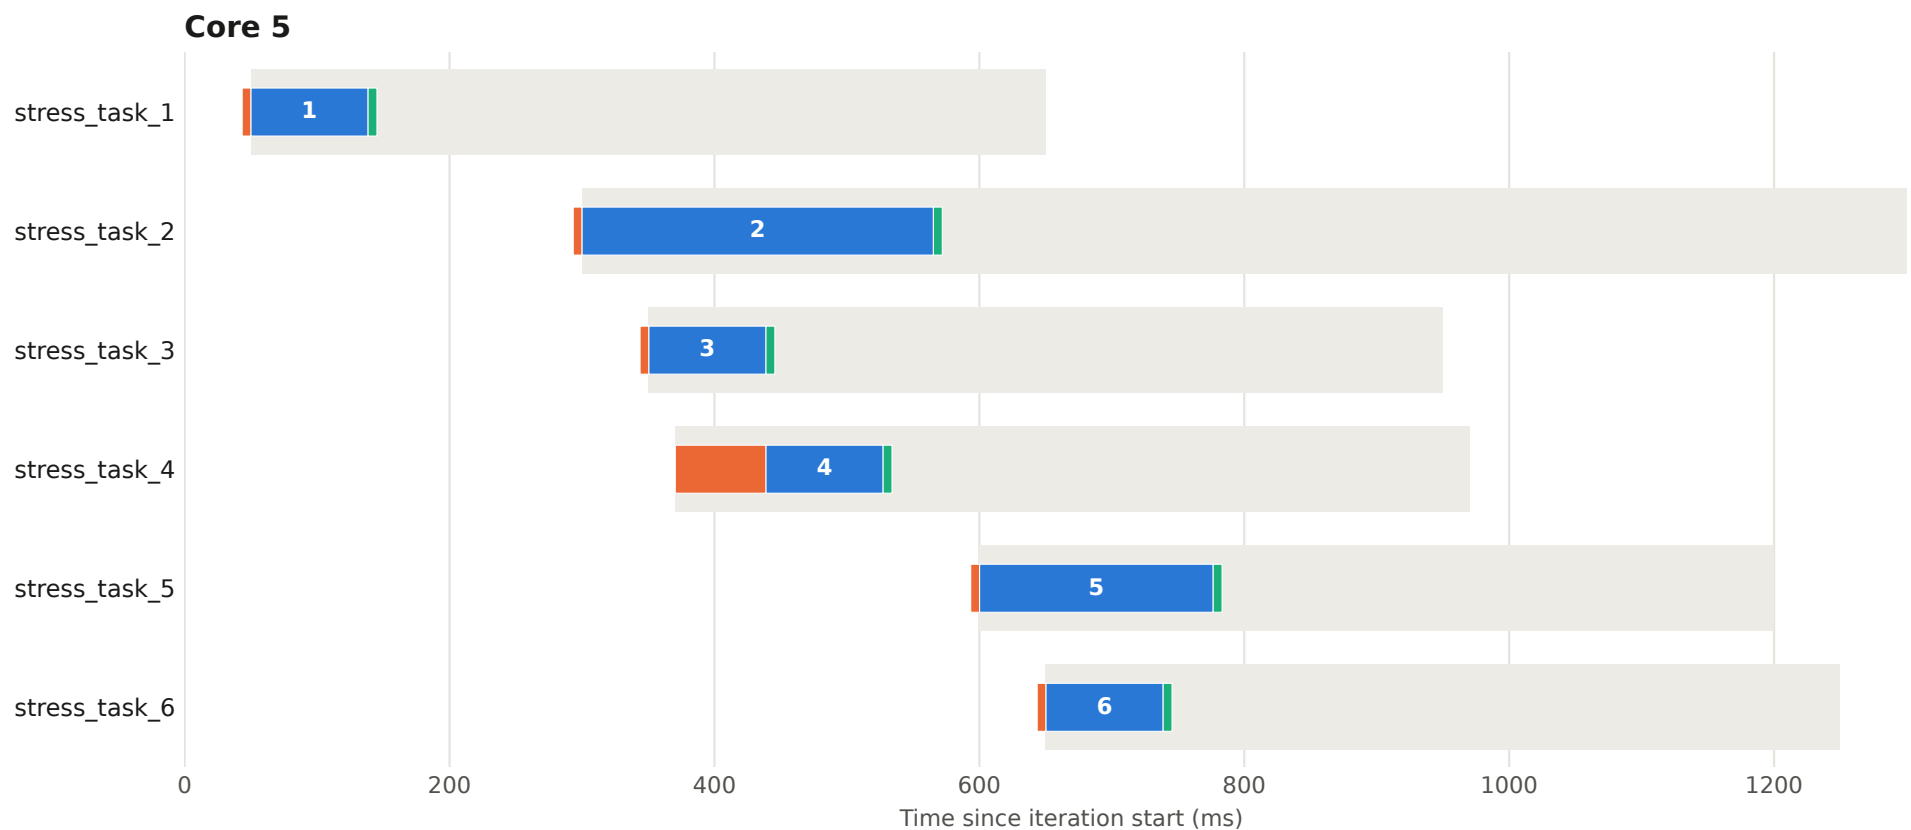


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 69

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

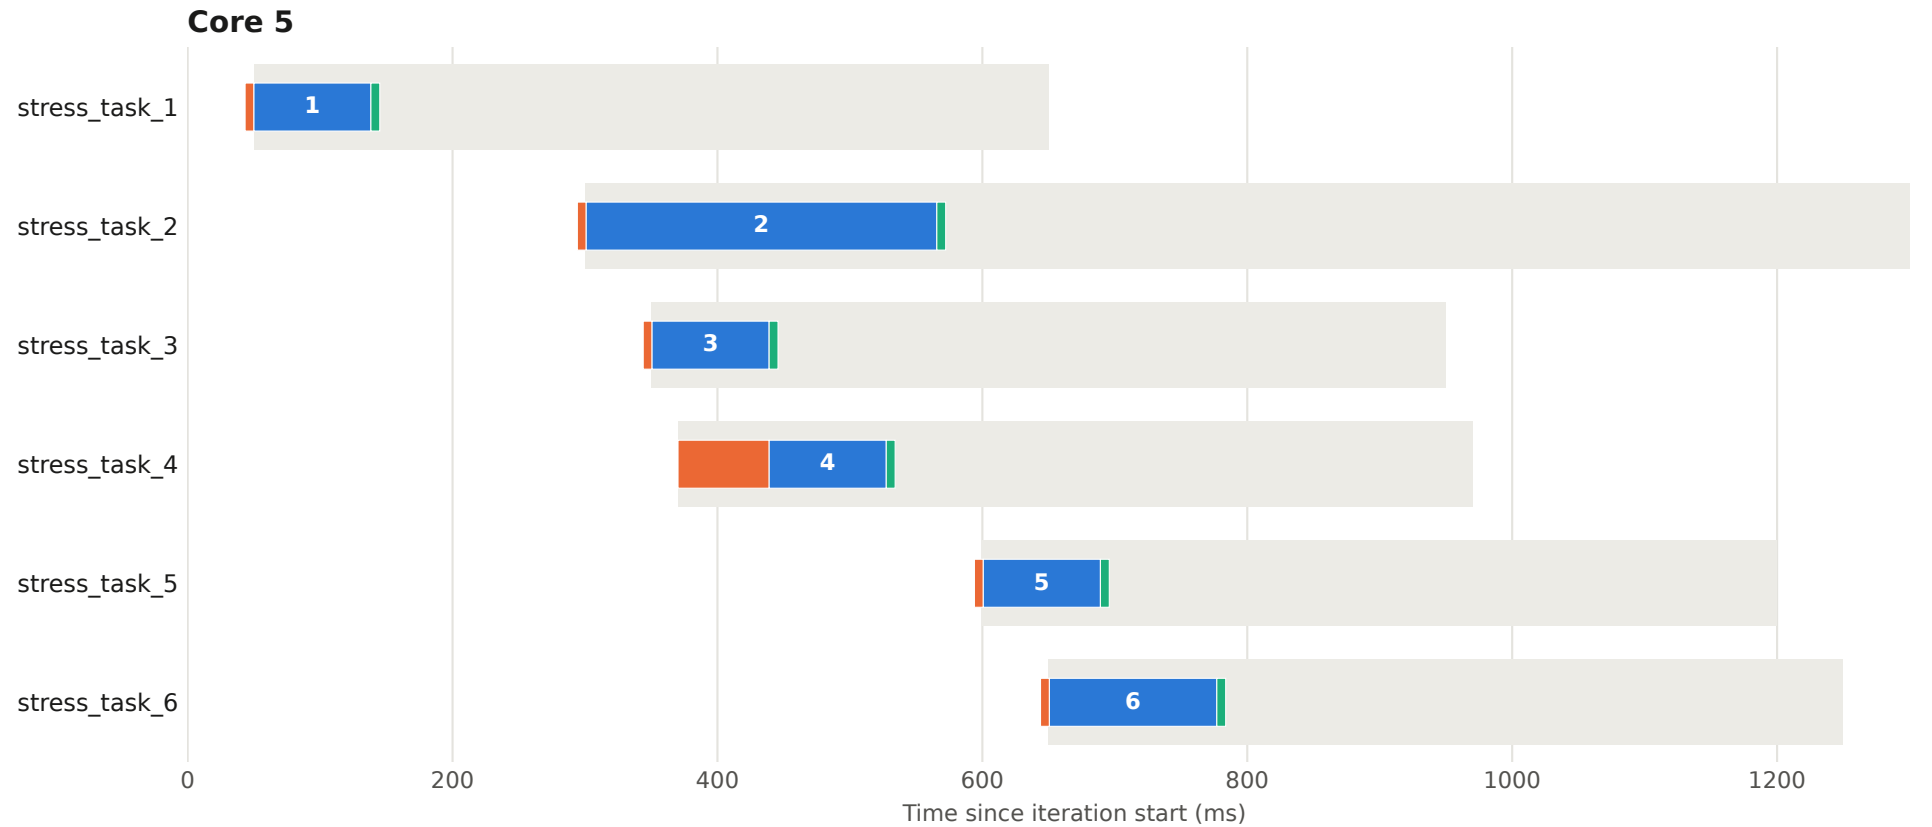


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 70

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

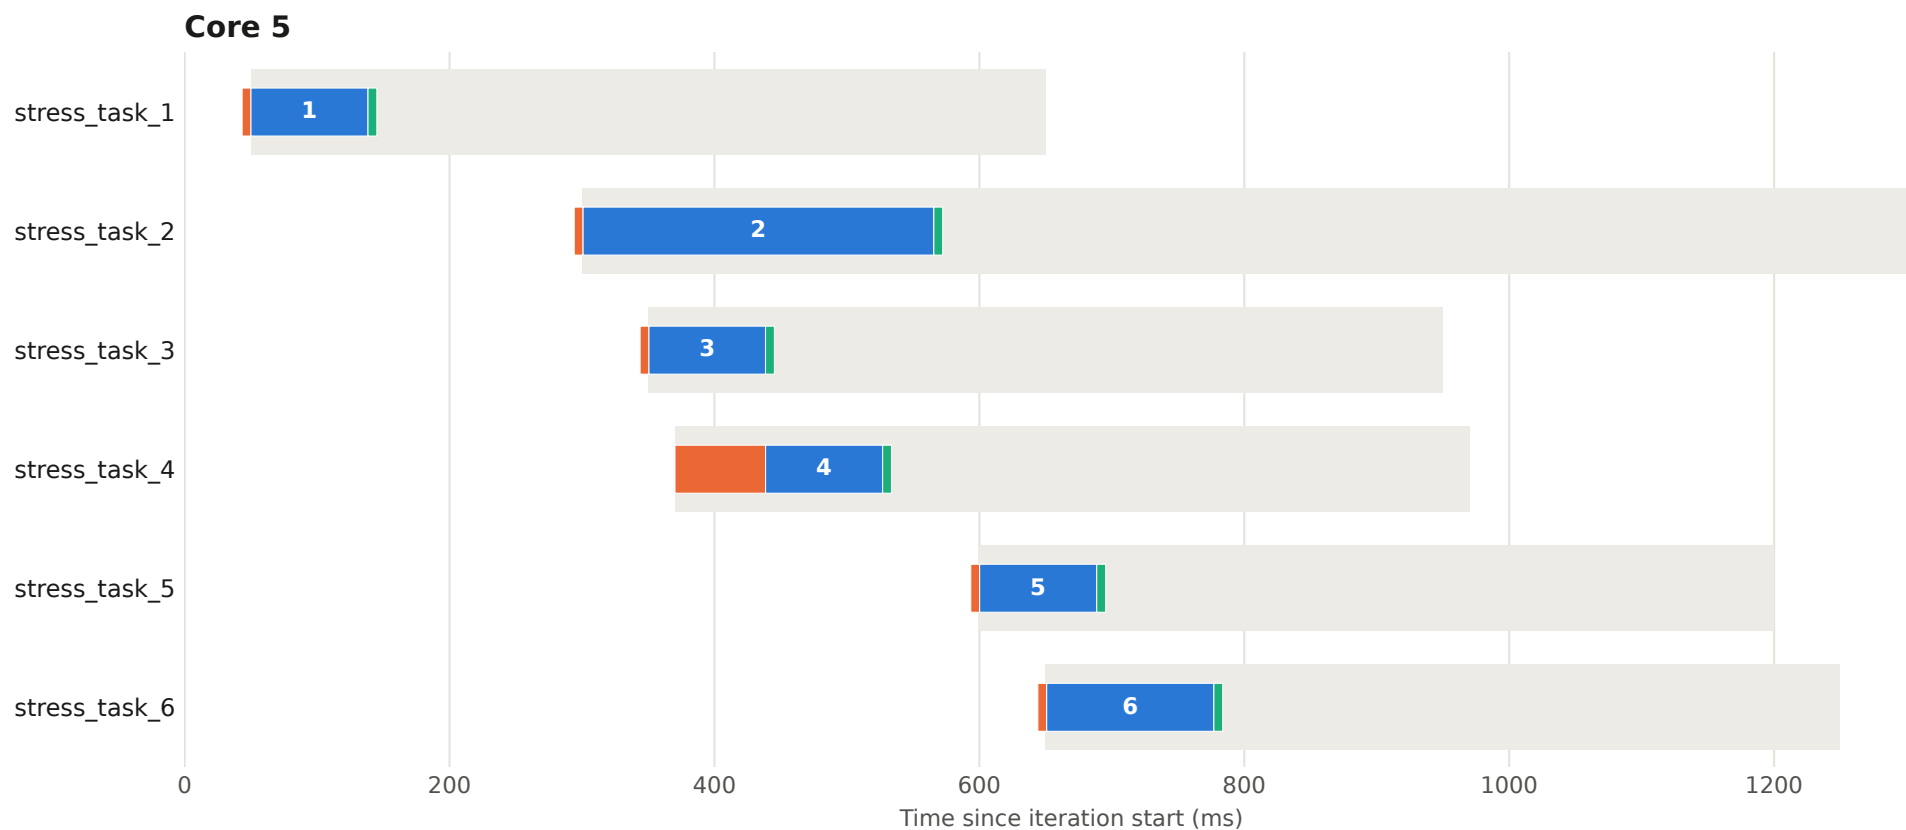


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 71

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

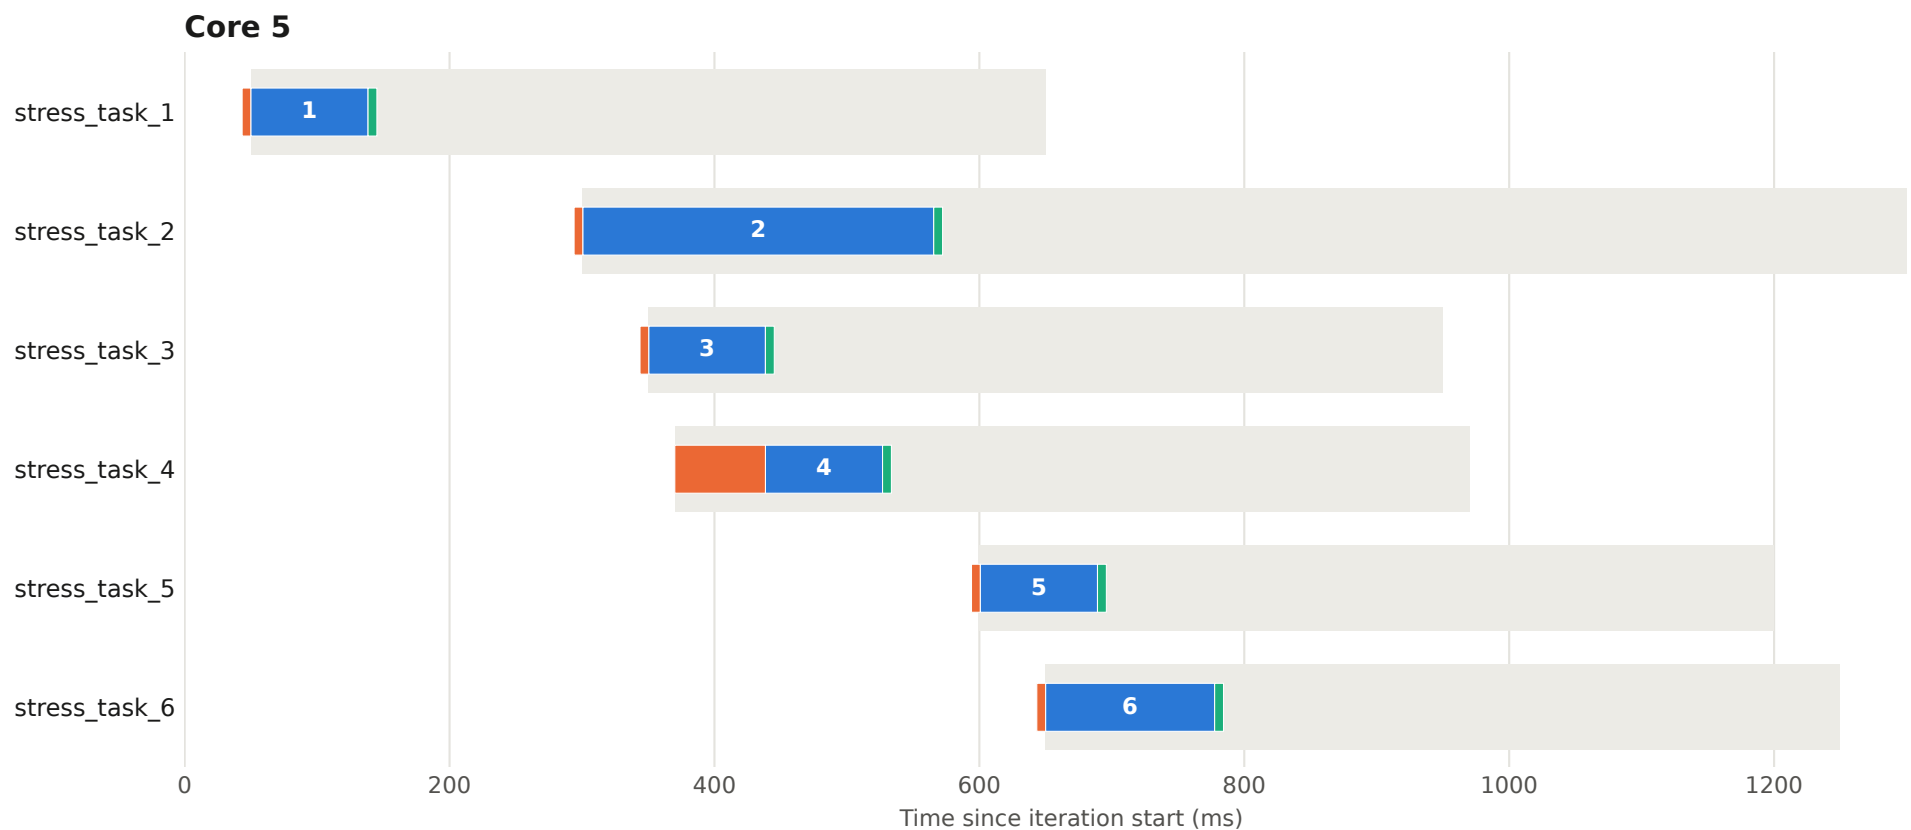


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 72

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

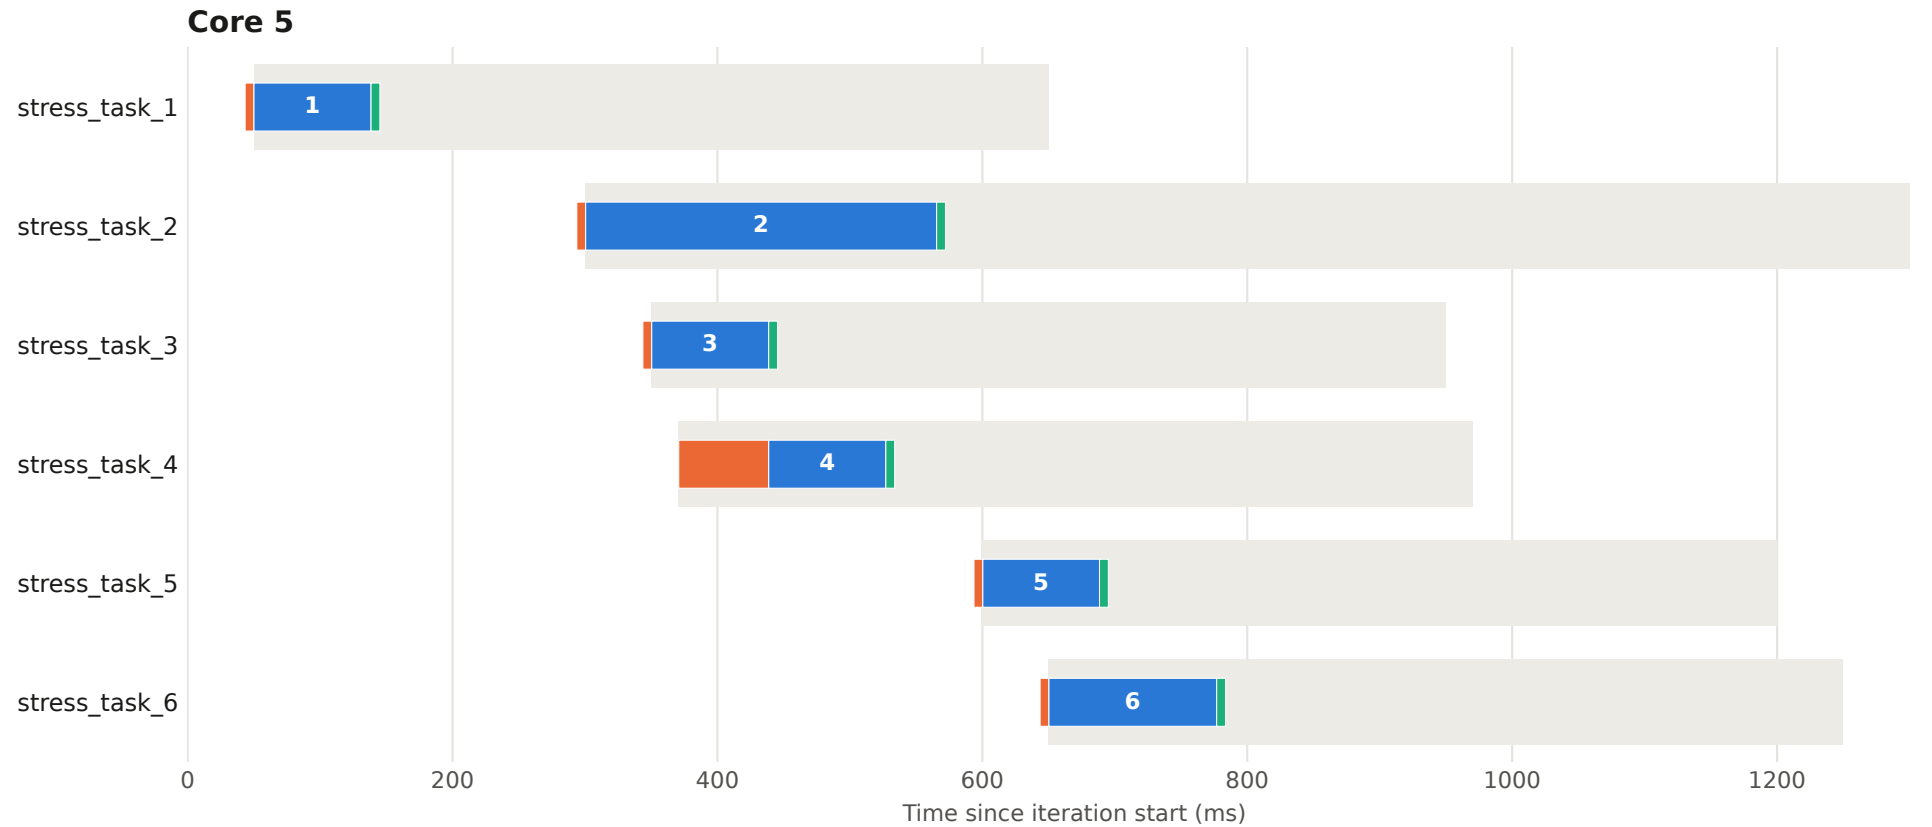


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 73

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

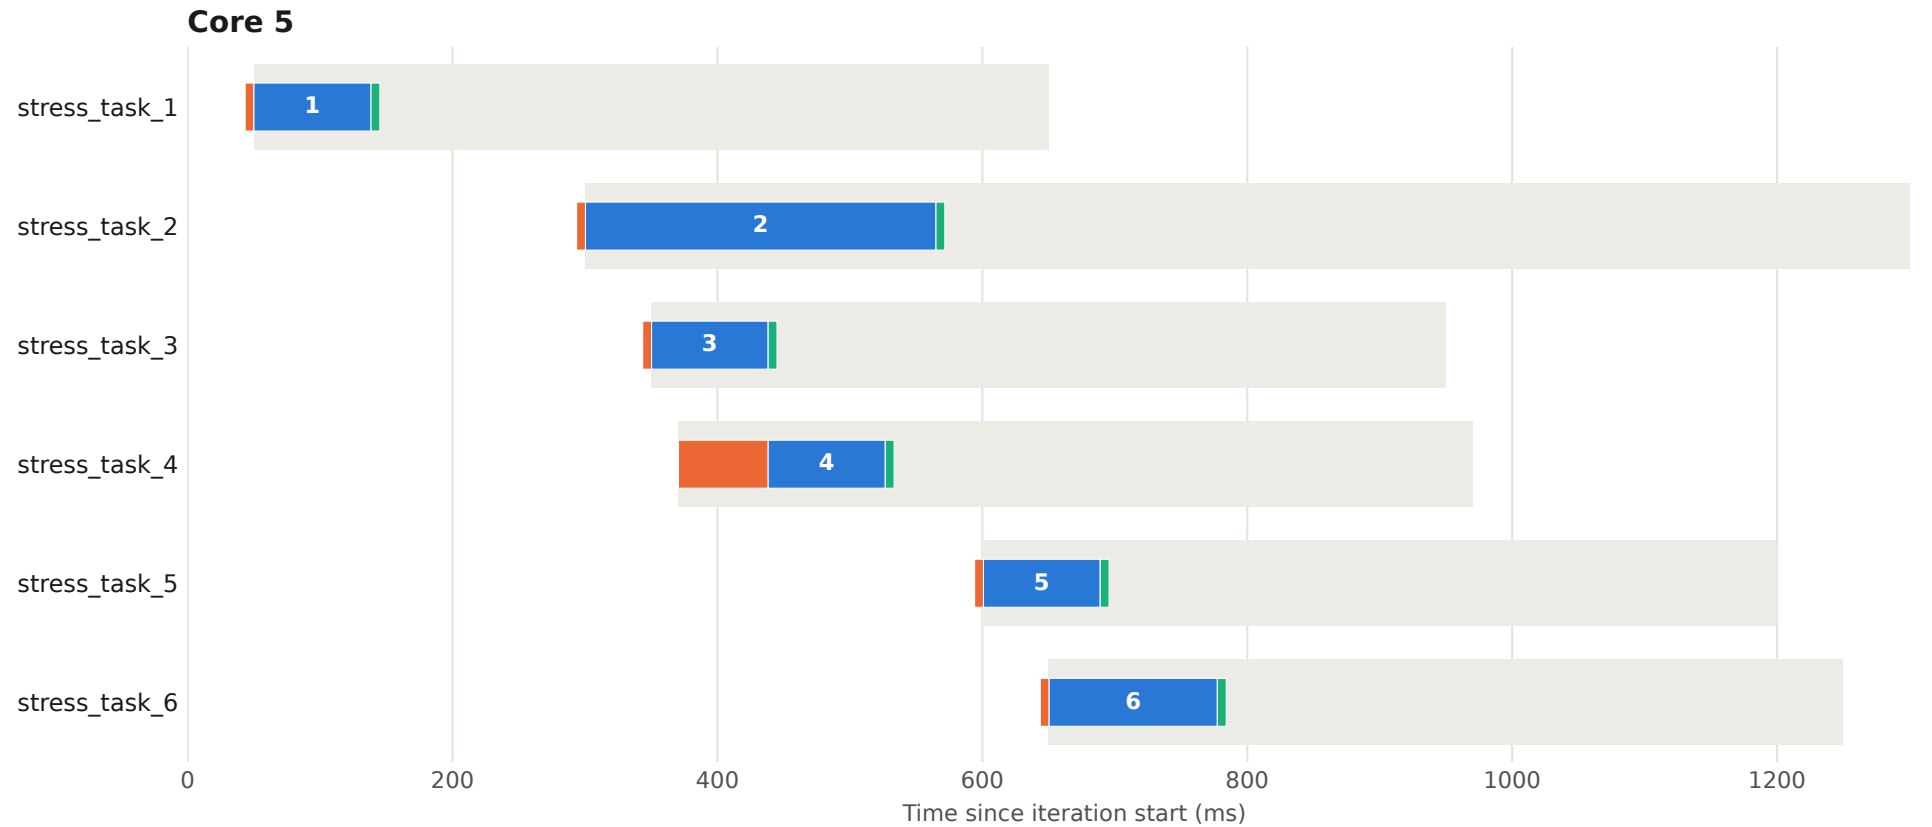


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 74

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

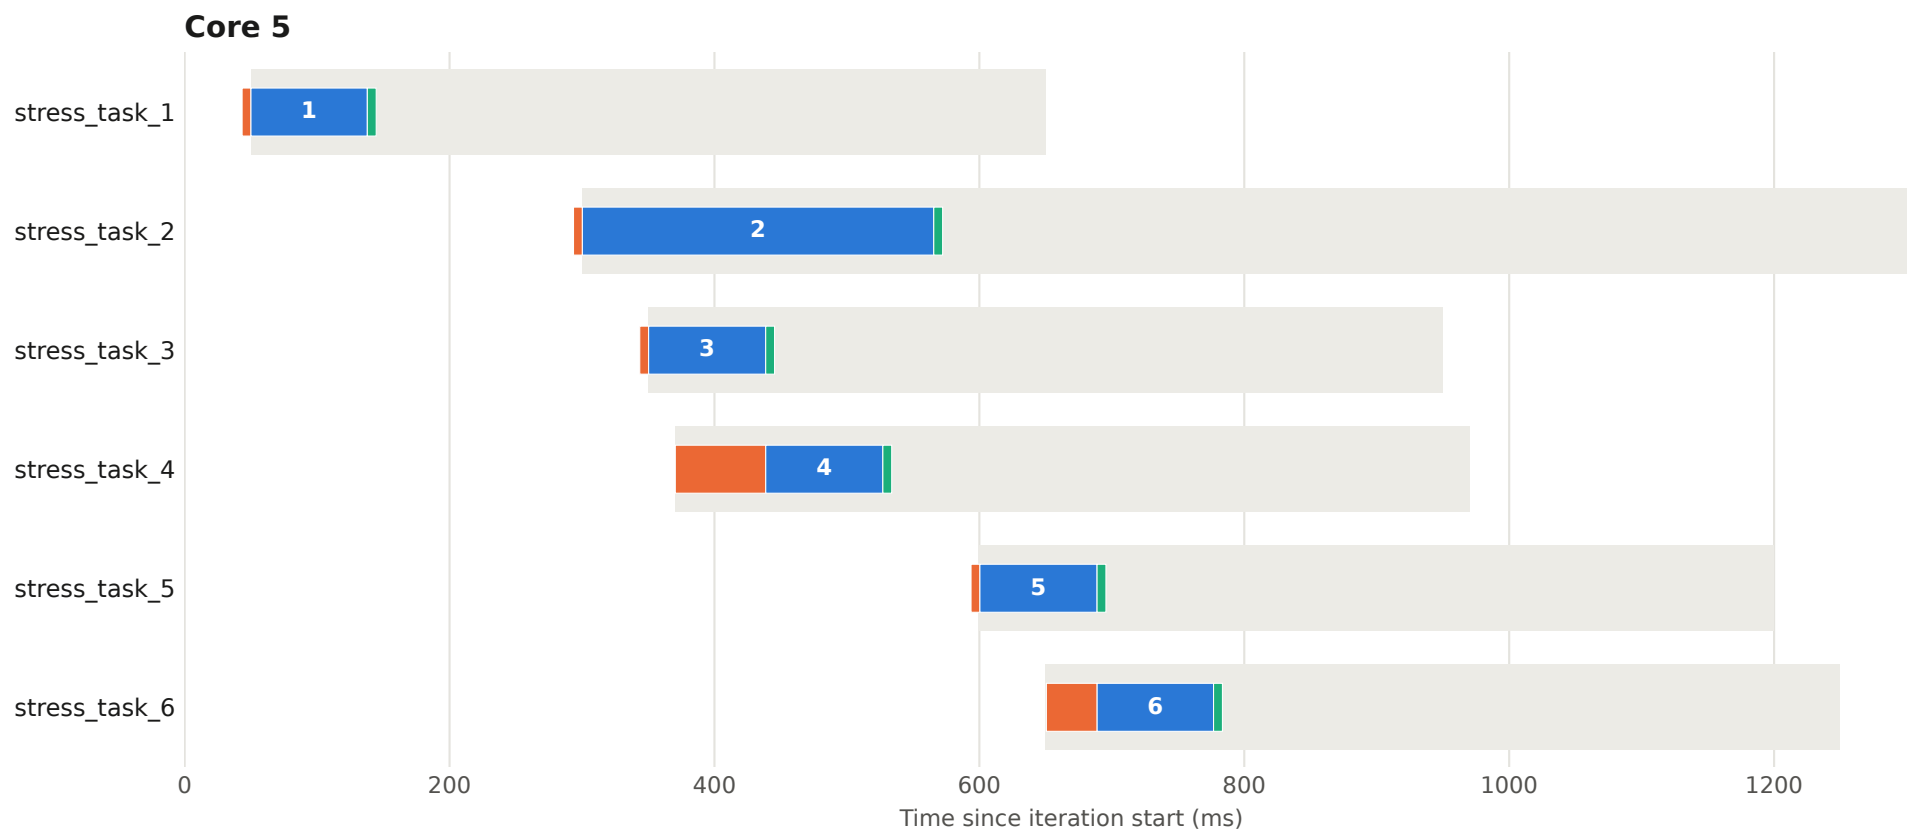


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 75

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

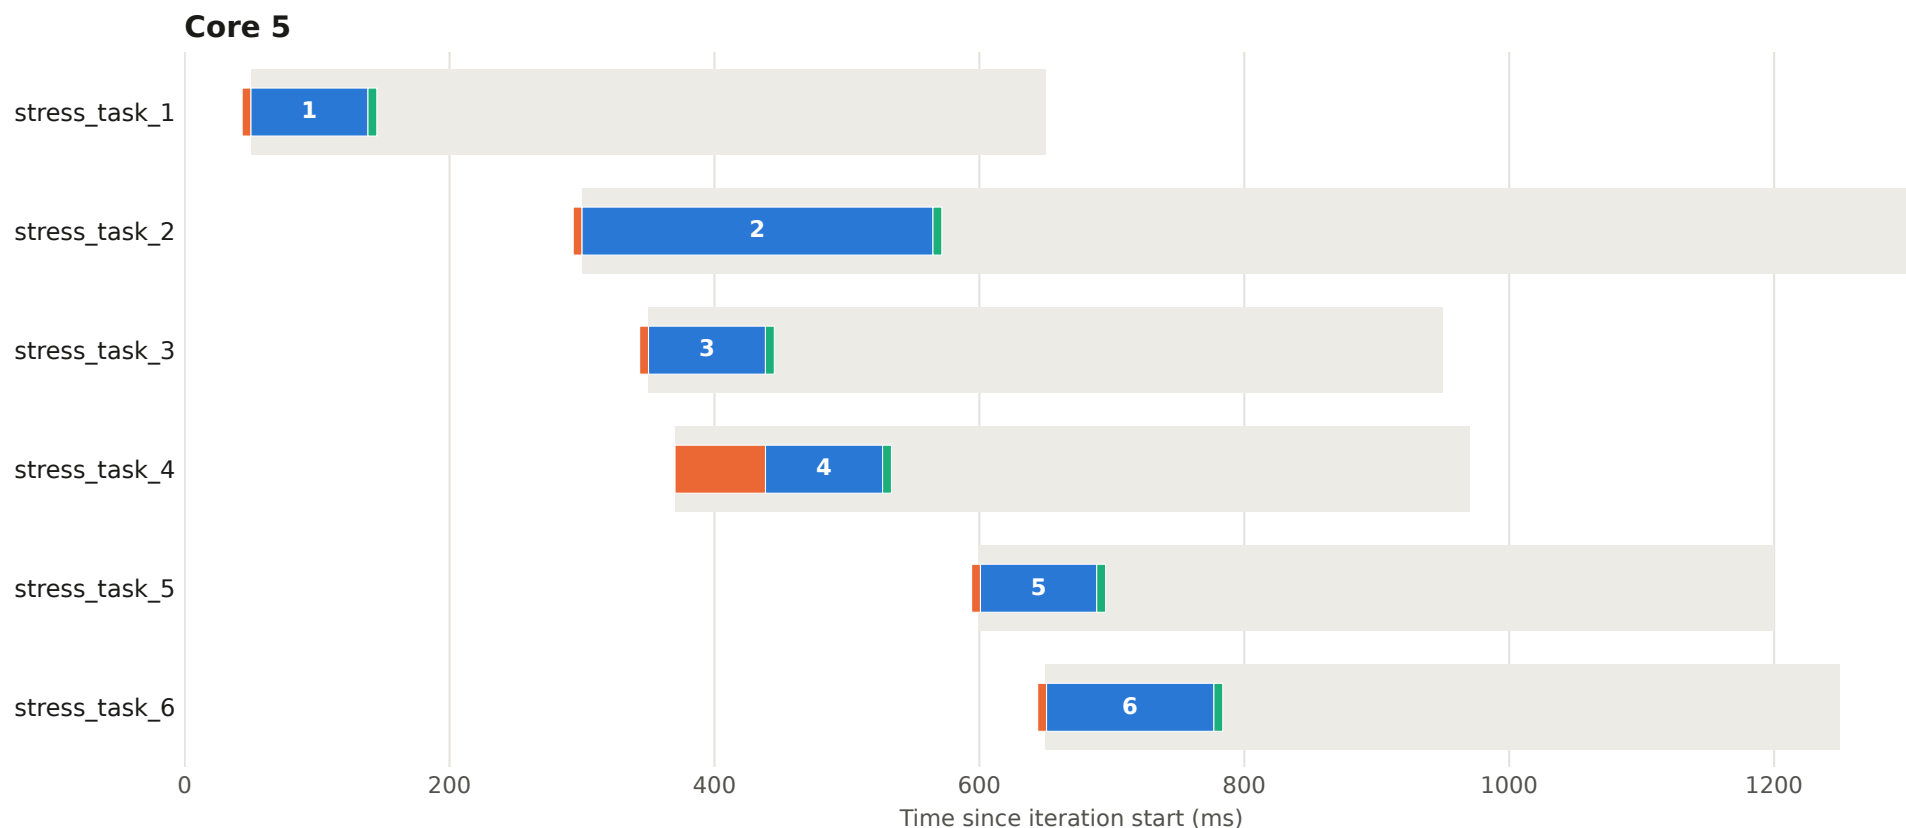


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 76

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

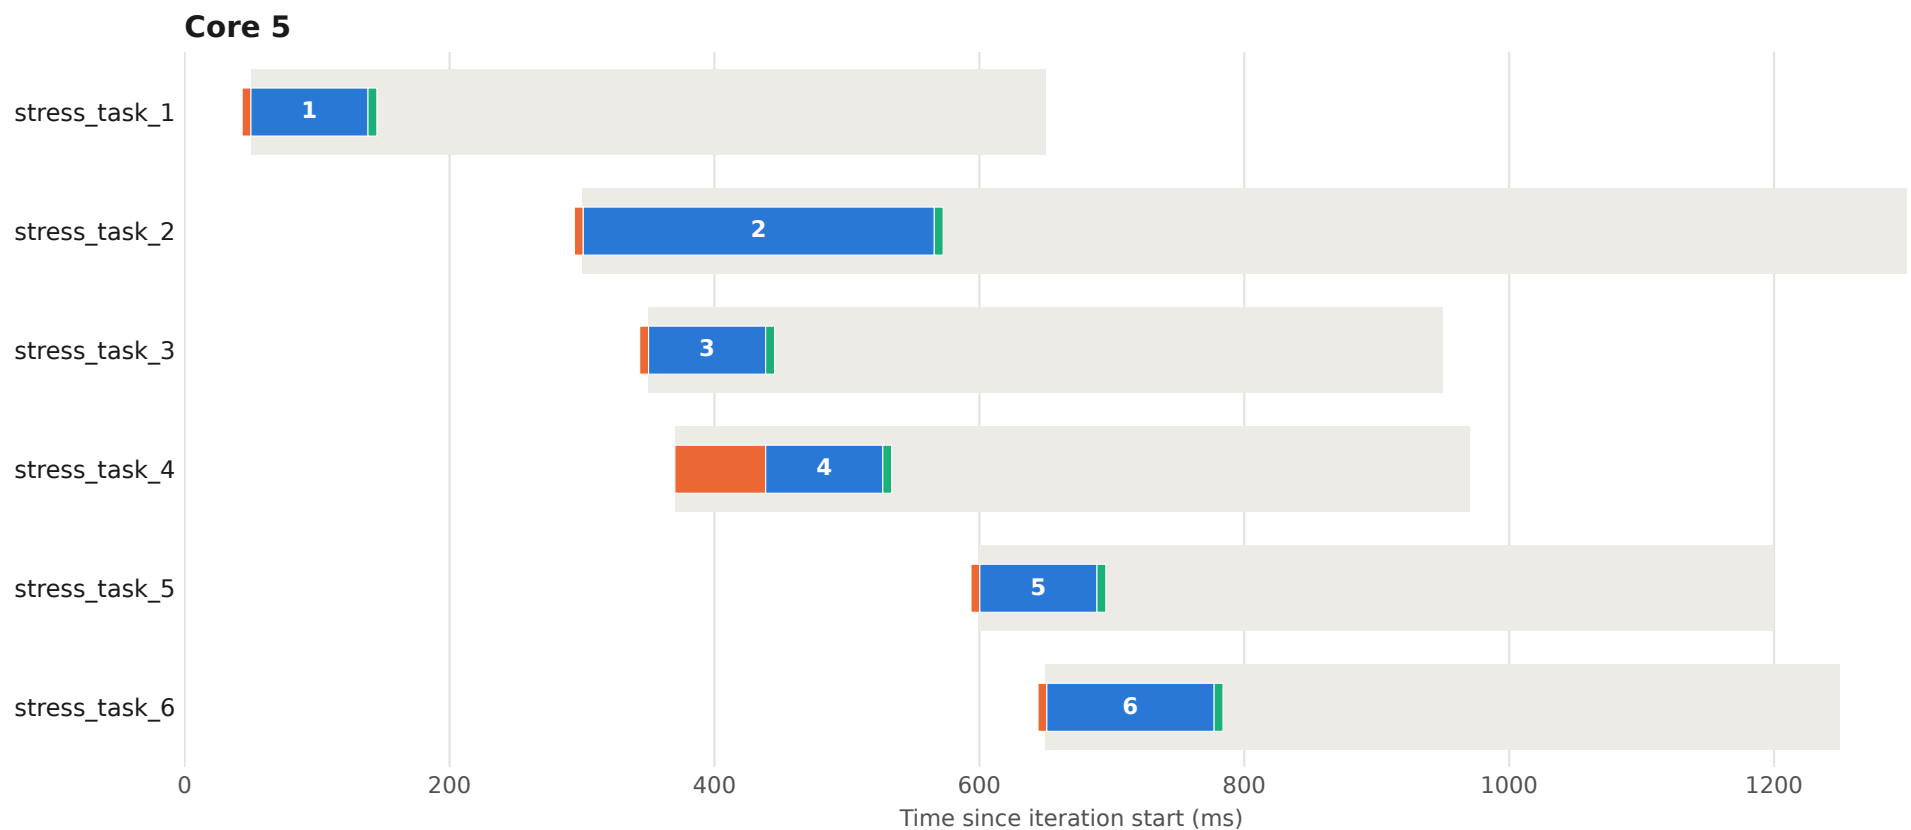


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 77

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

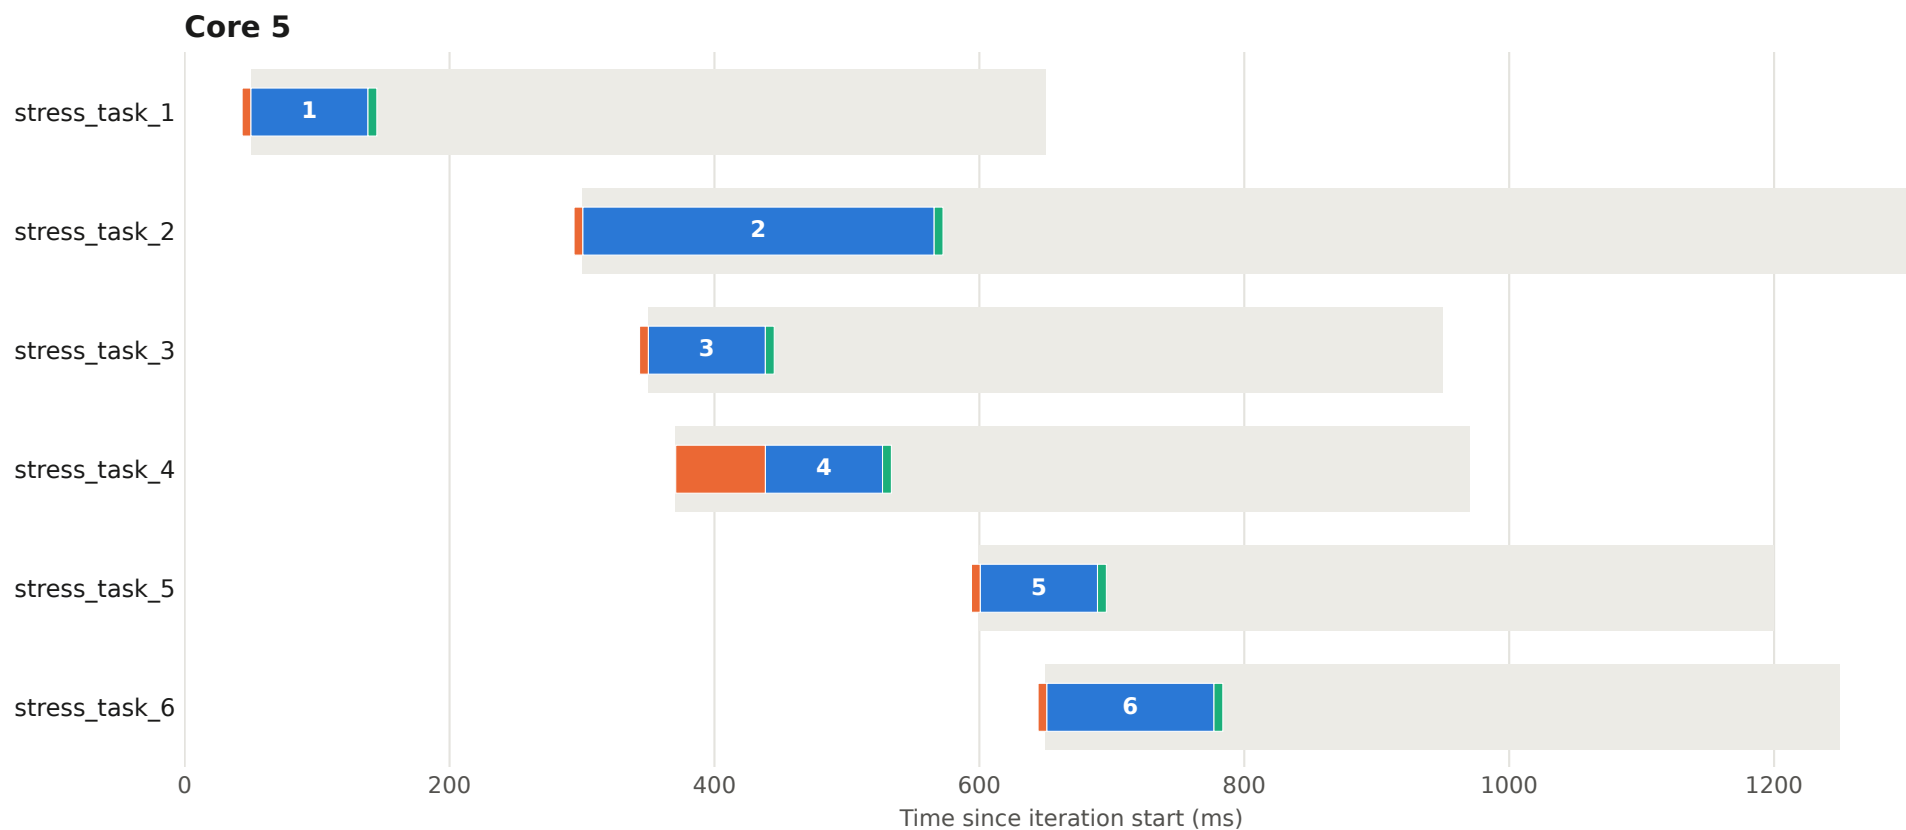


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 78

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

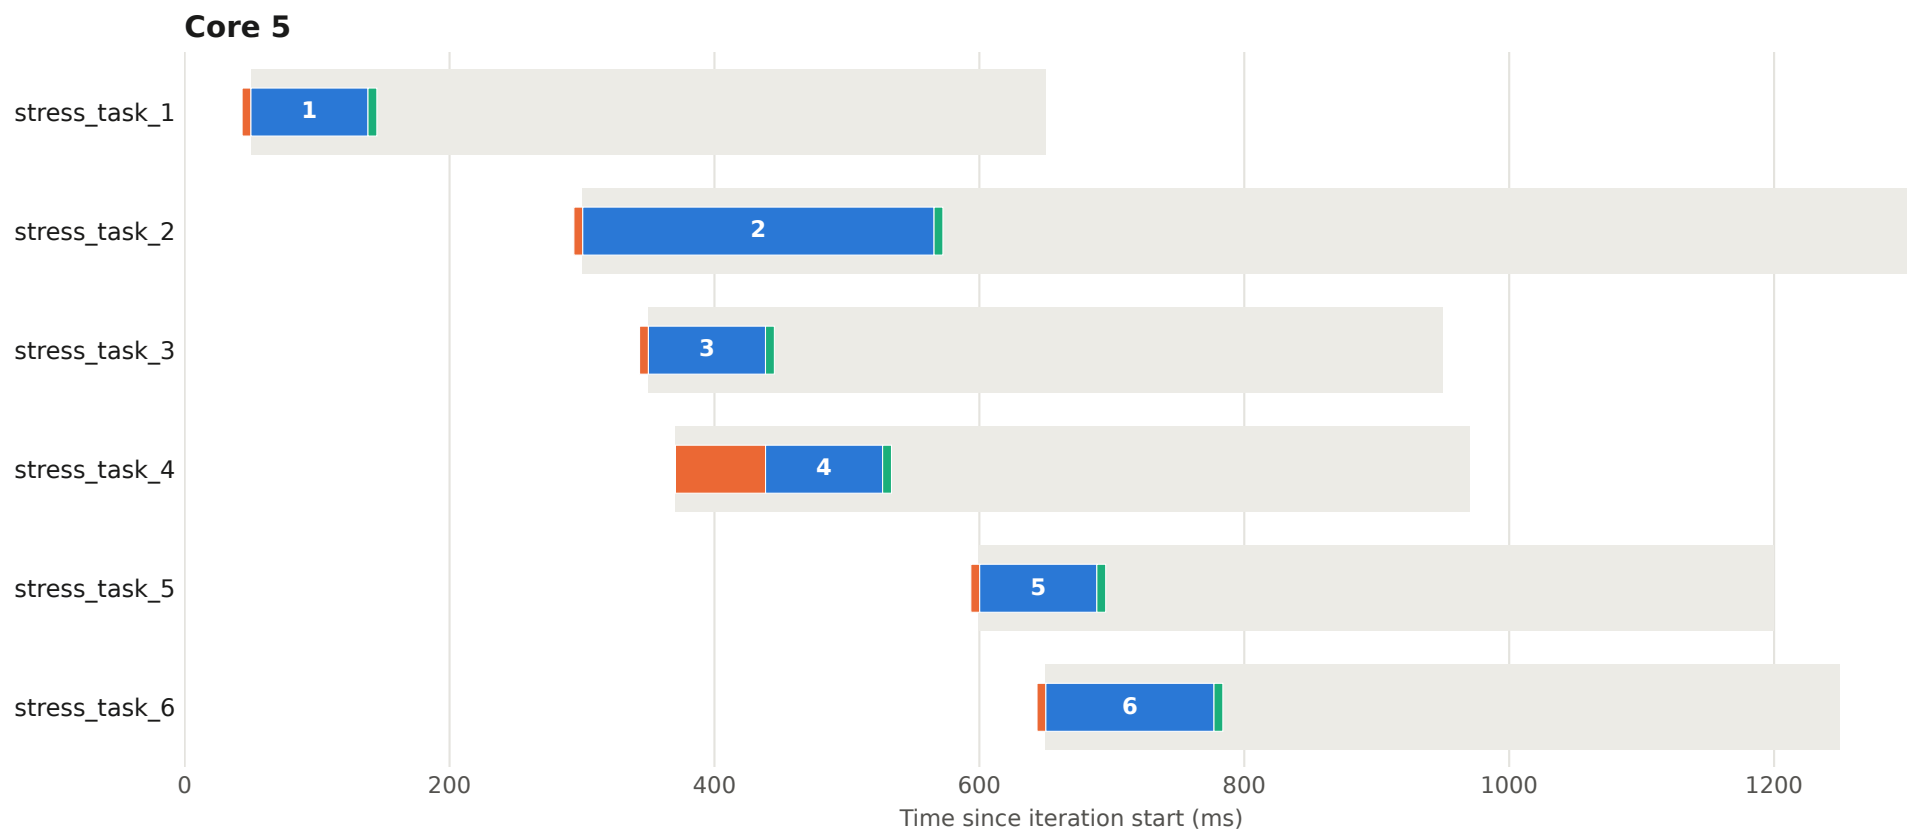


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 79

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

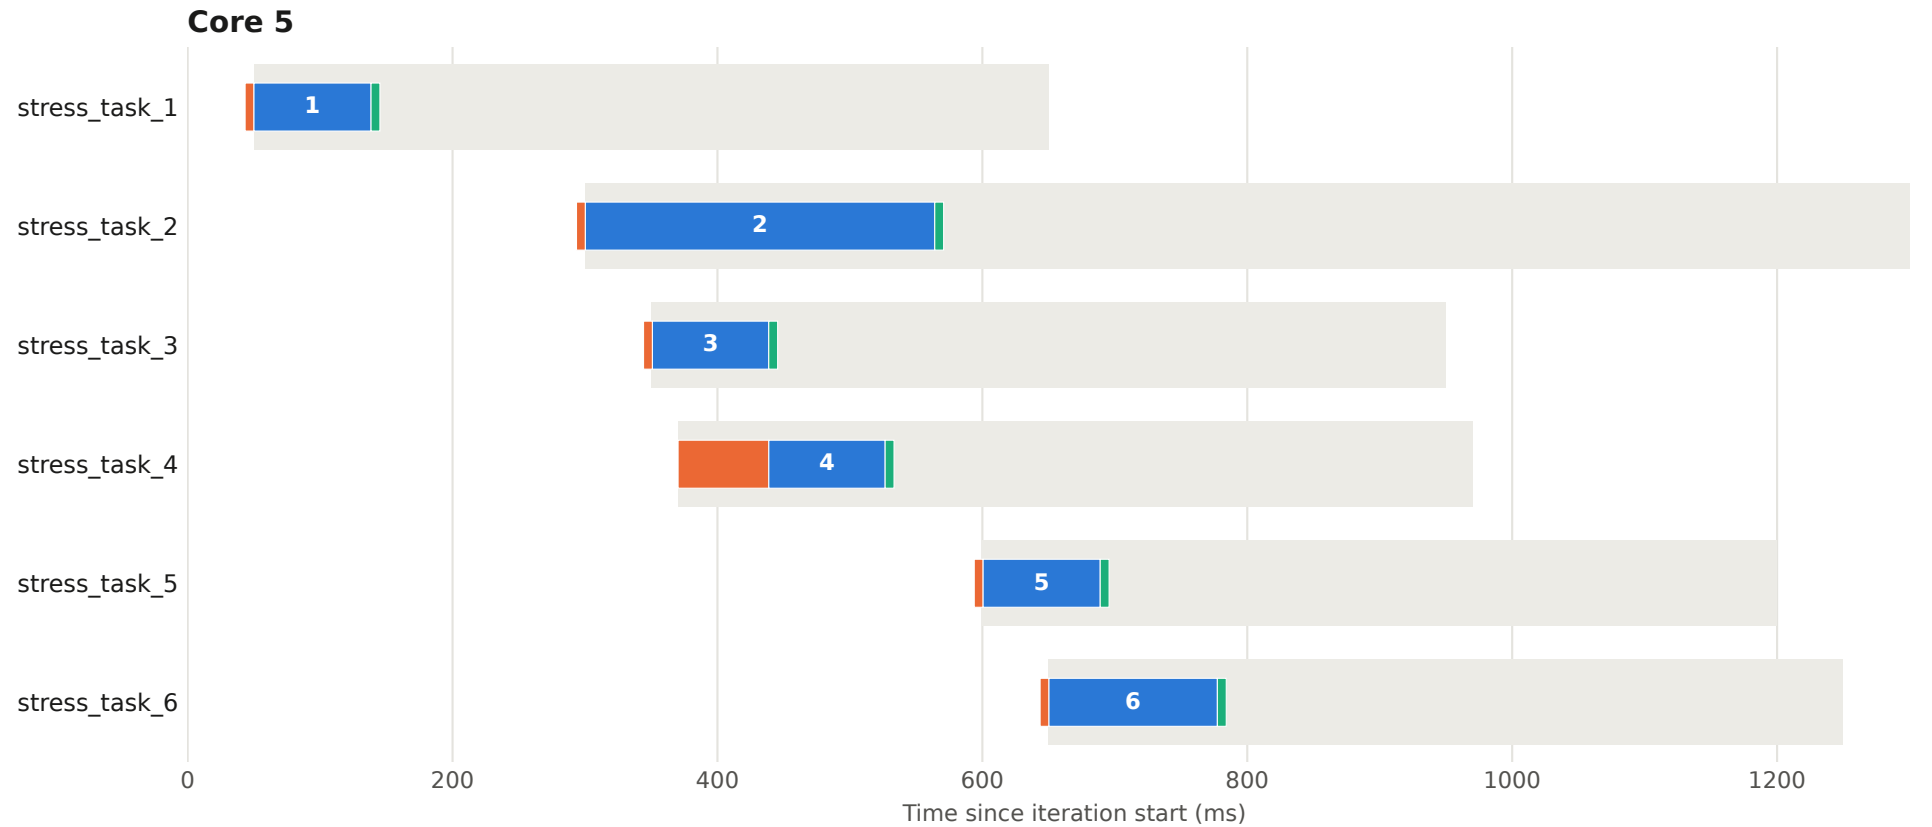


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 80

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

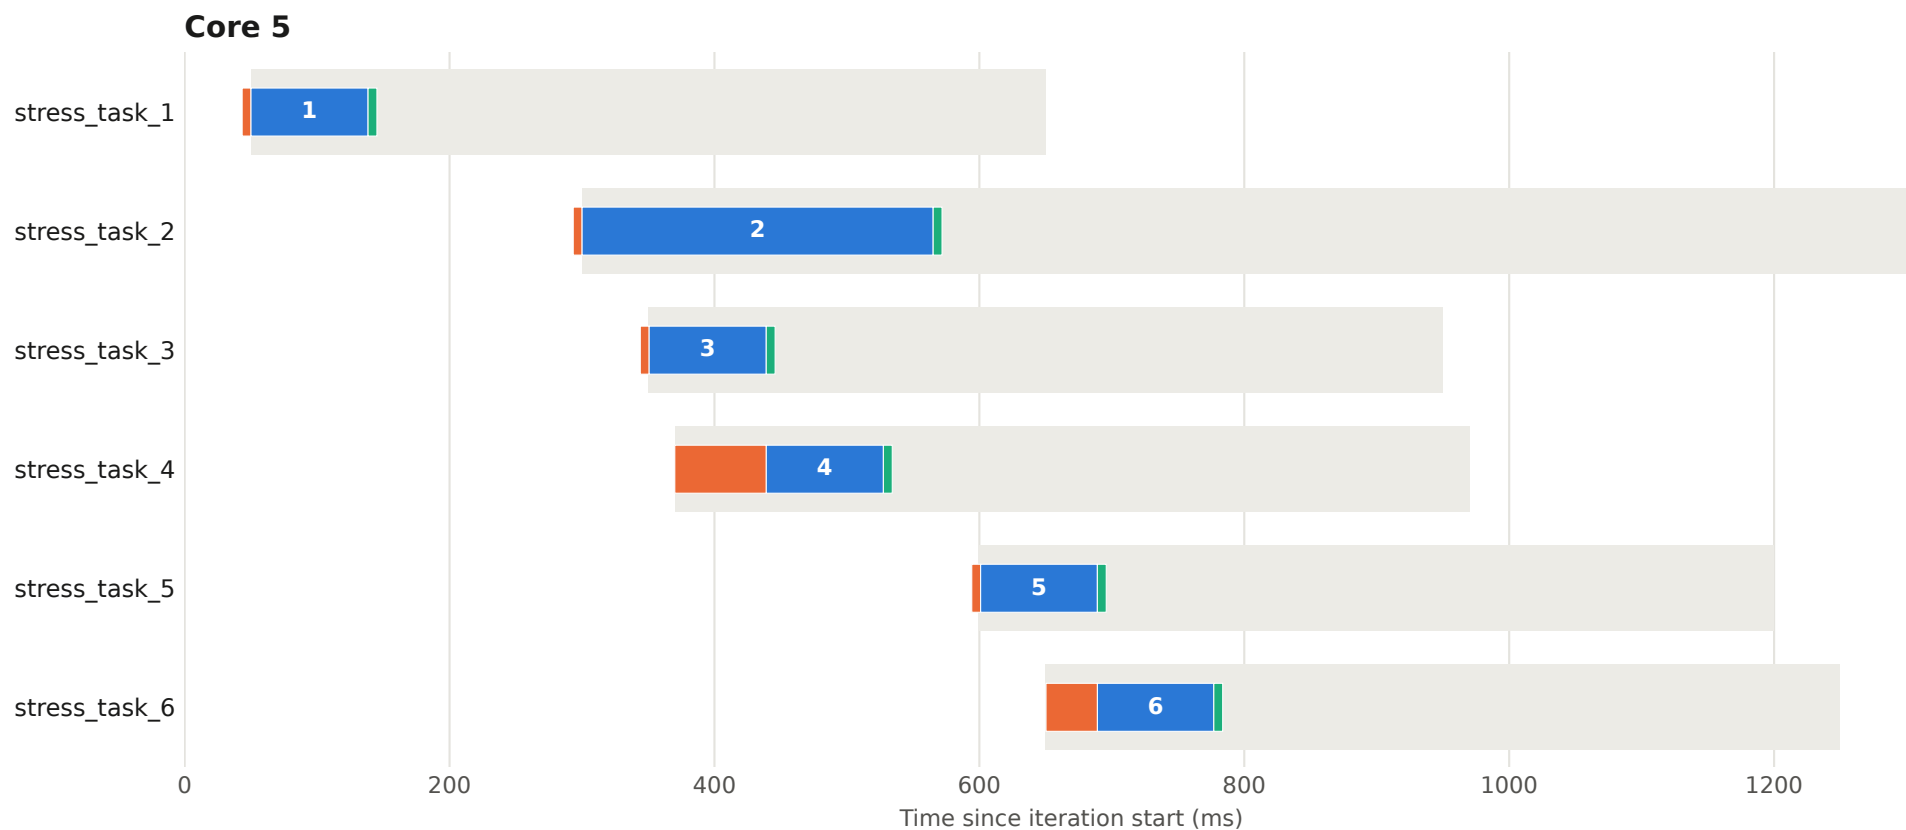


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 81

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

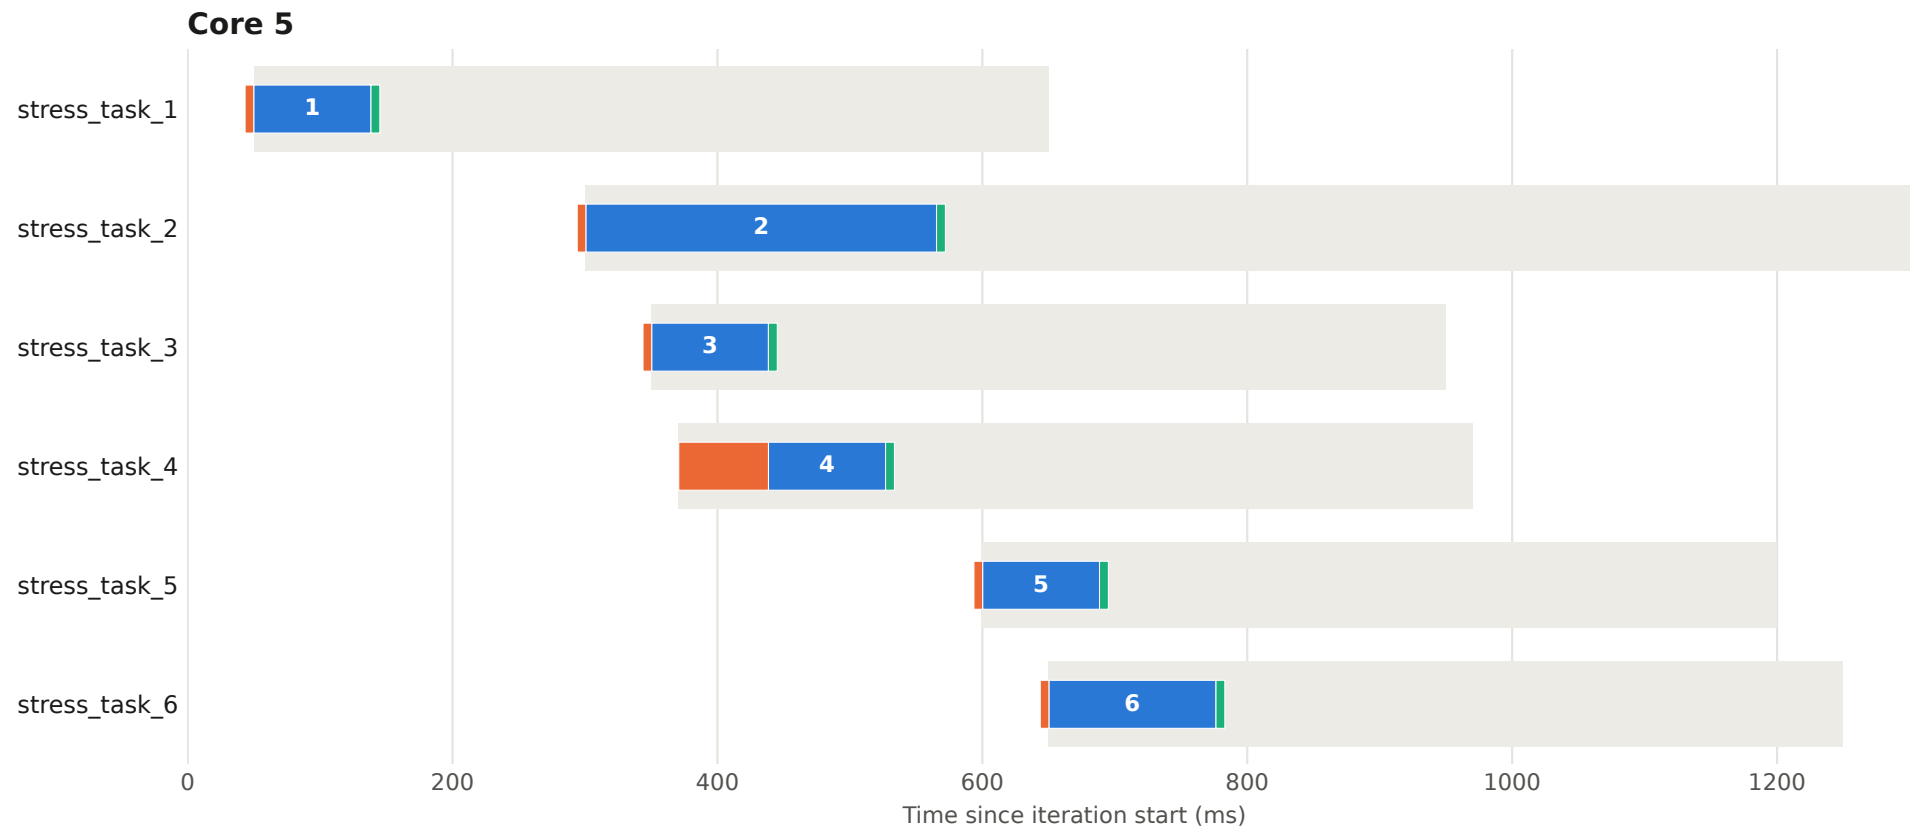


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 82

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

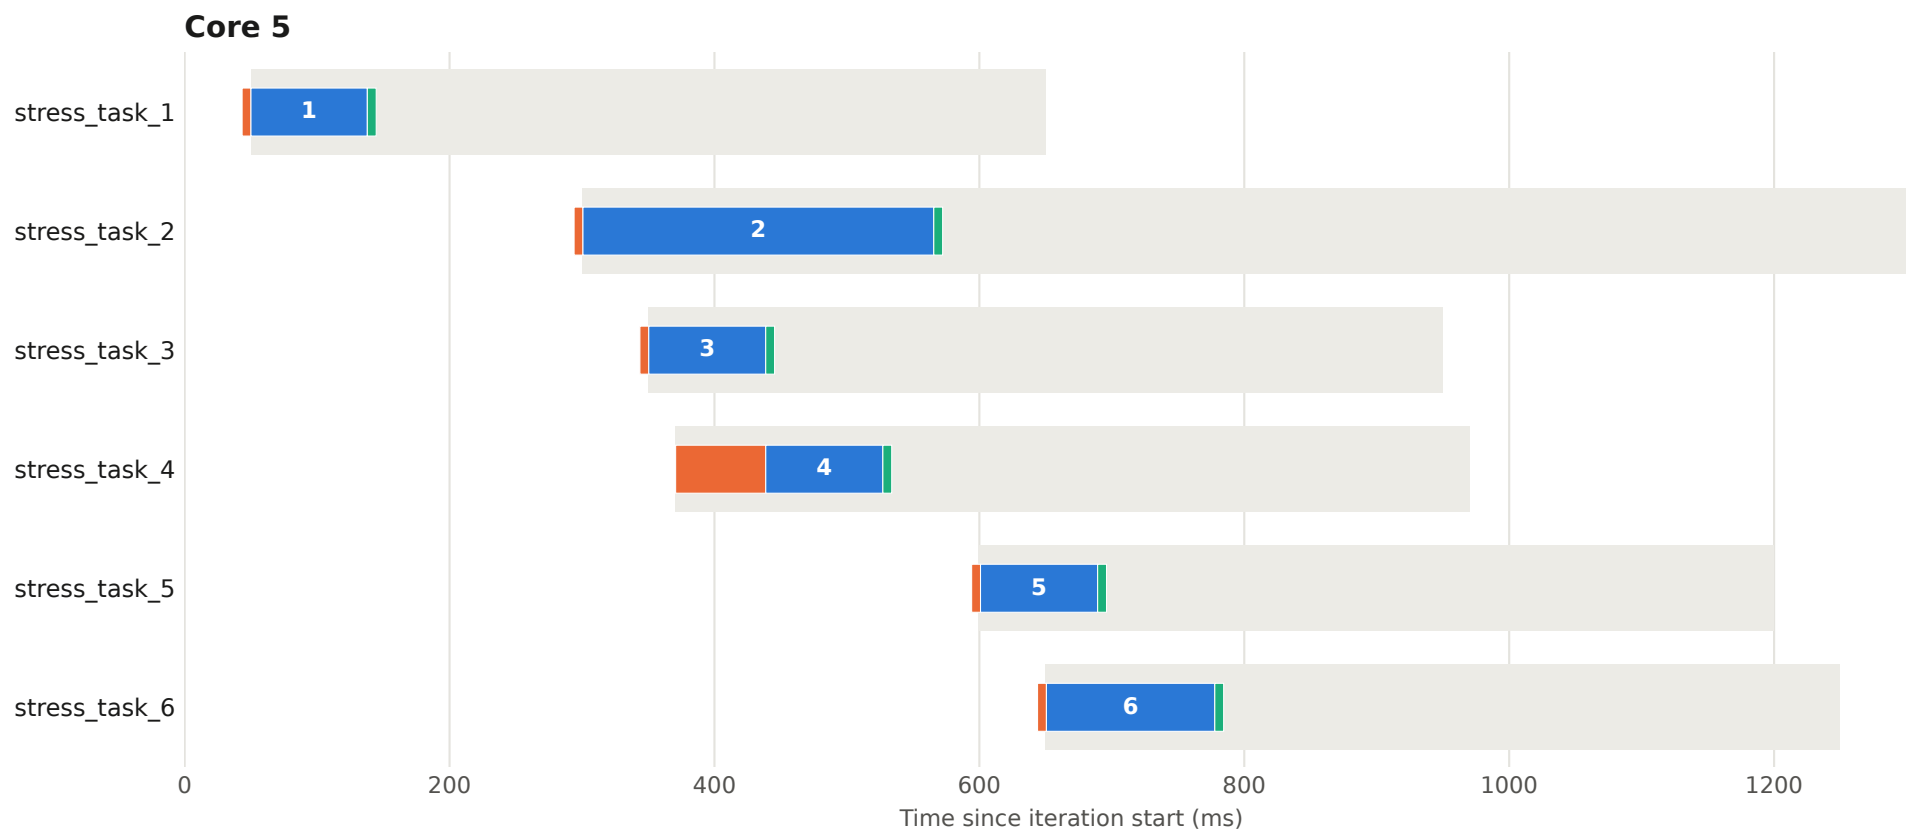


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 83

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

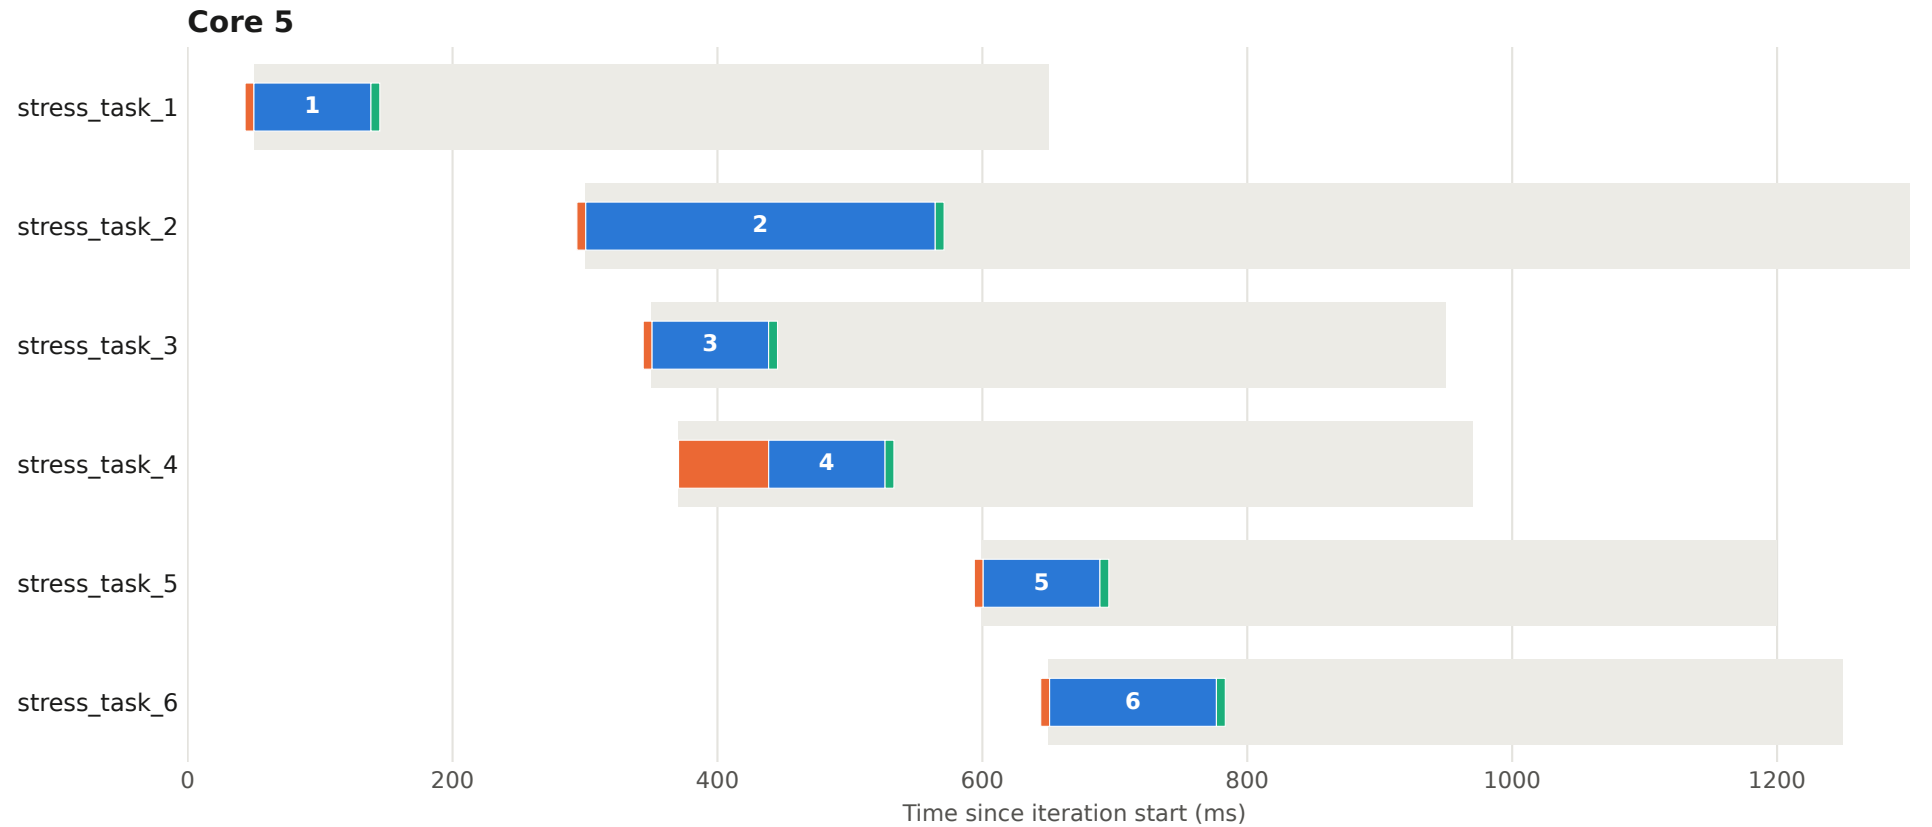


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 84

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

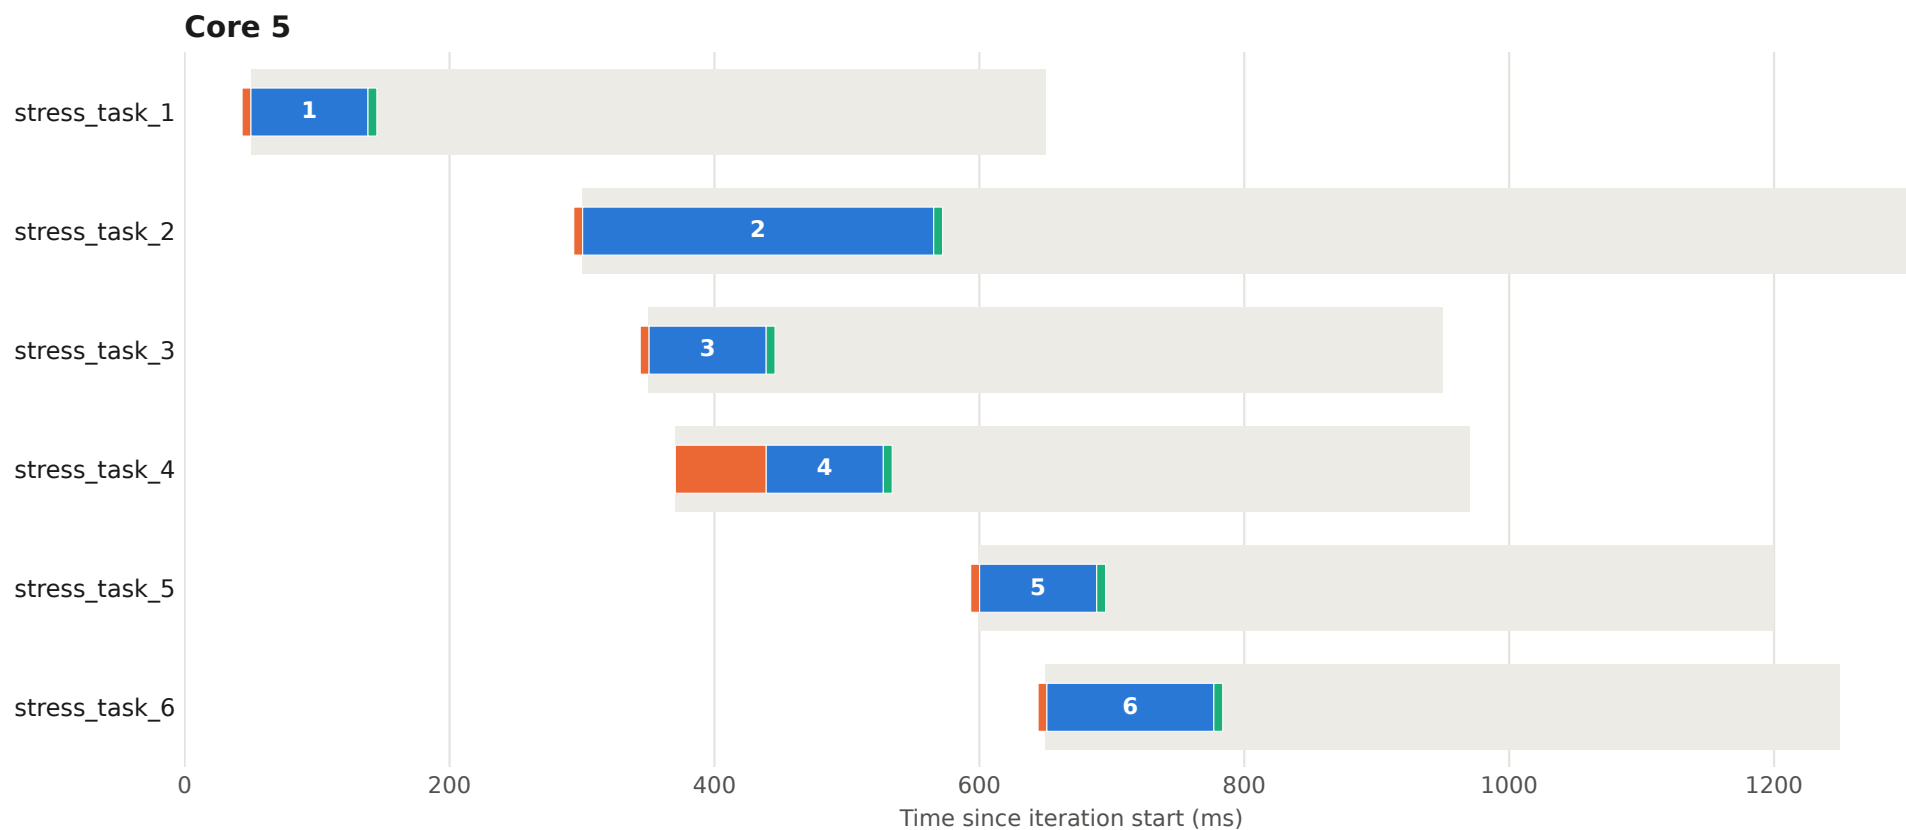


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 85

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

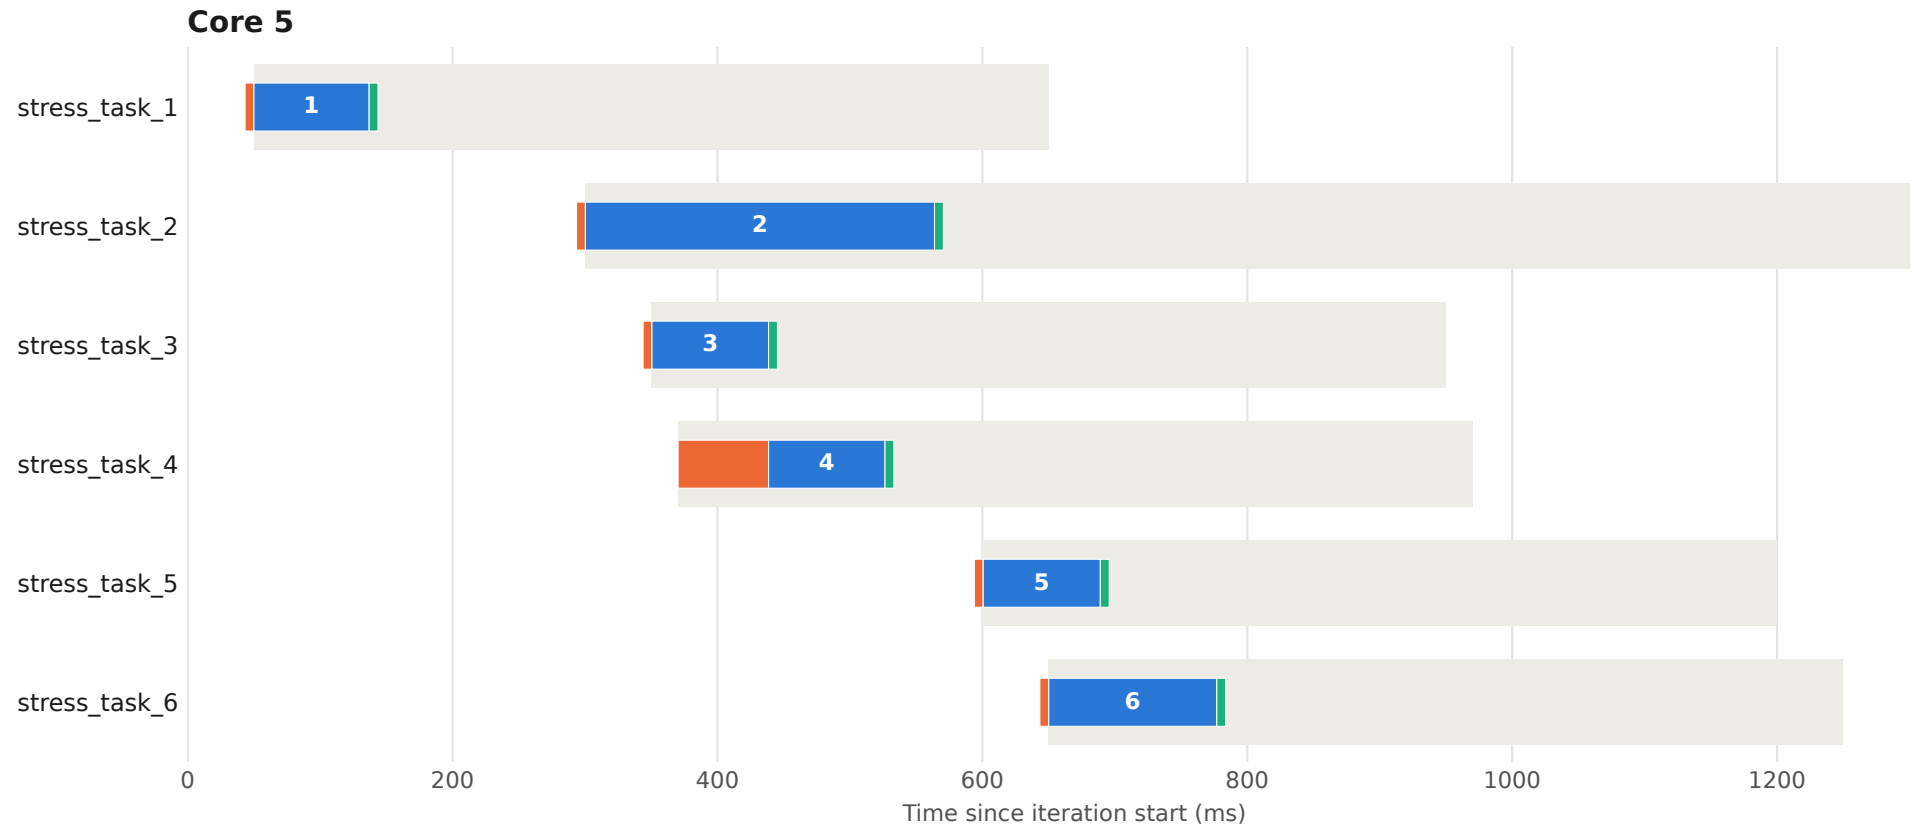


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 86

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

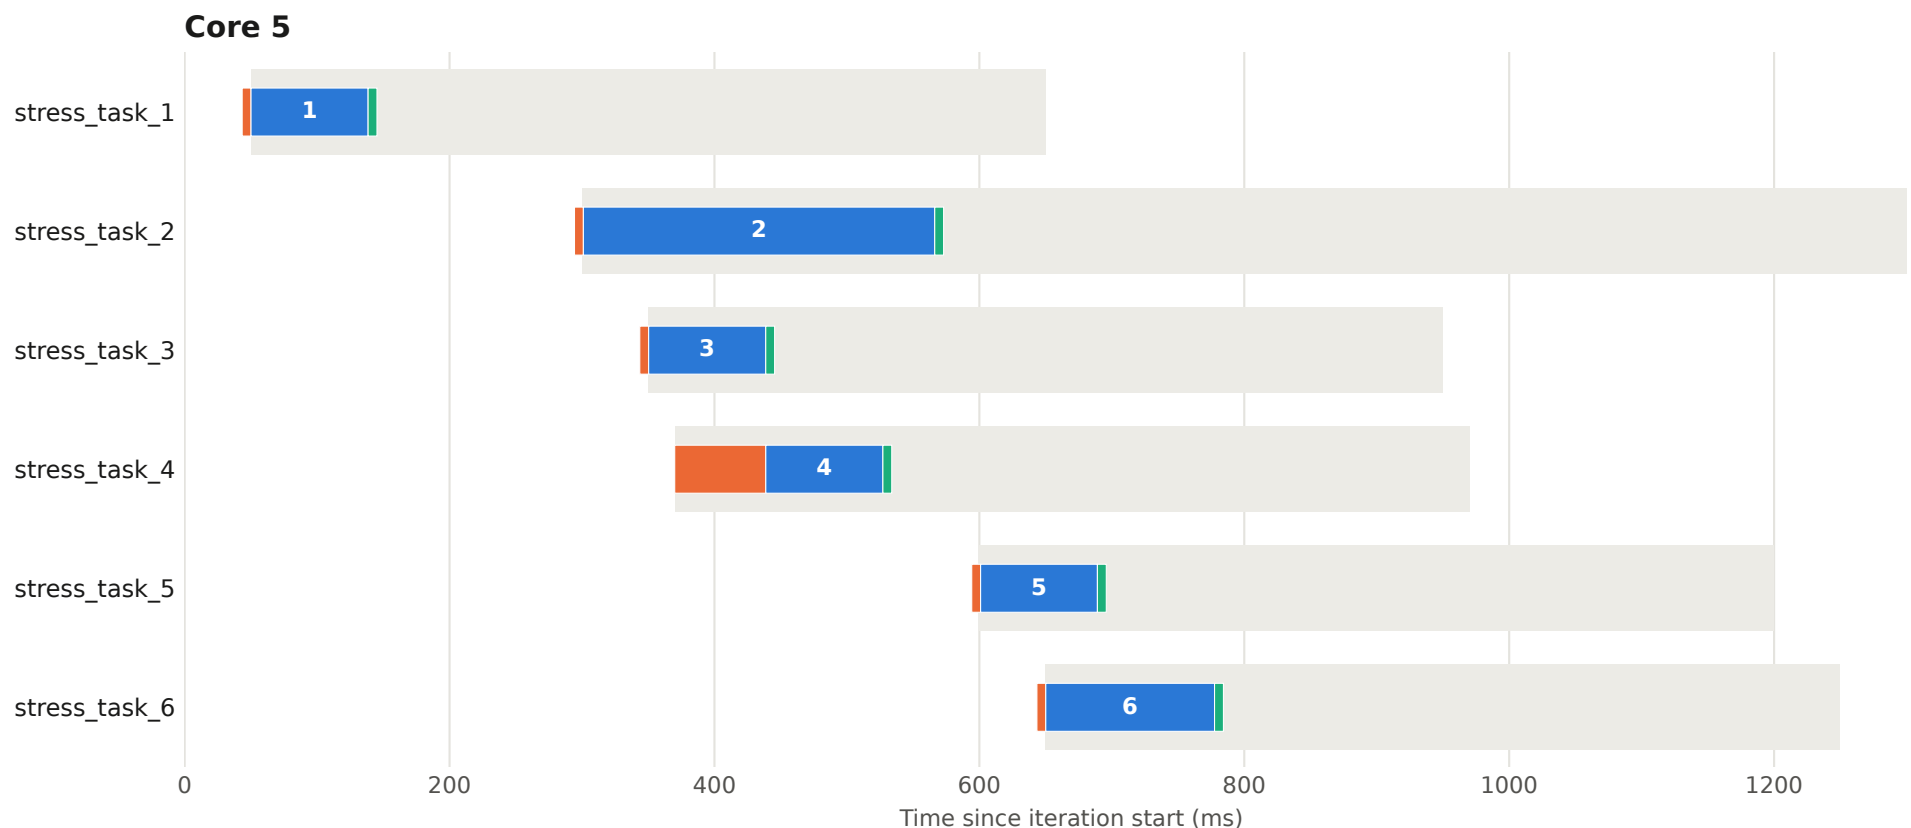


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 87

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

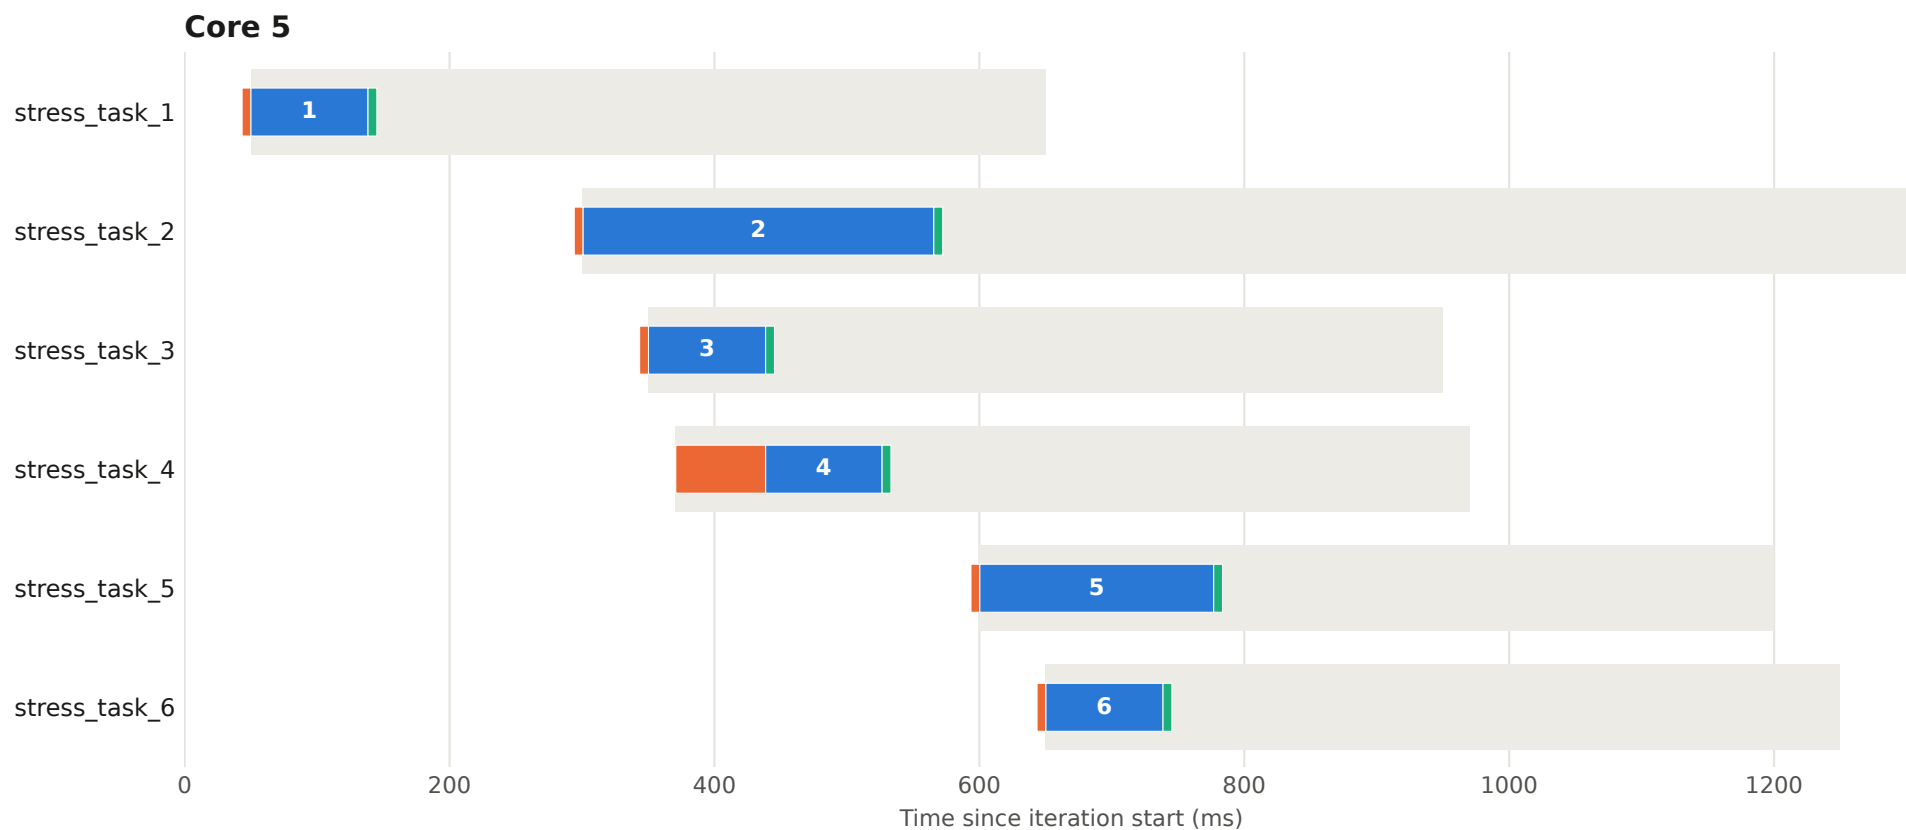

Execution plan - iteration 88

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

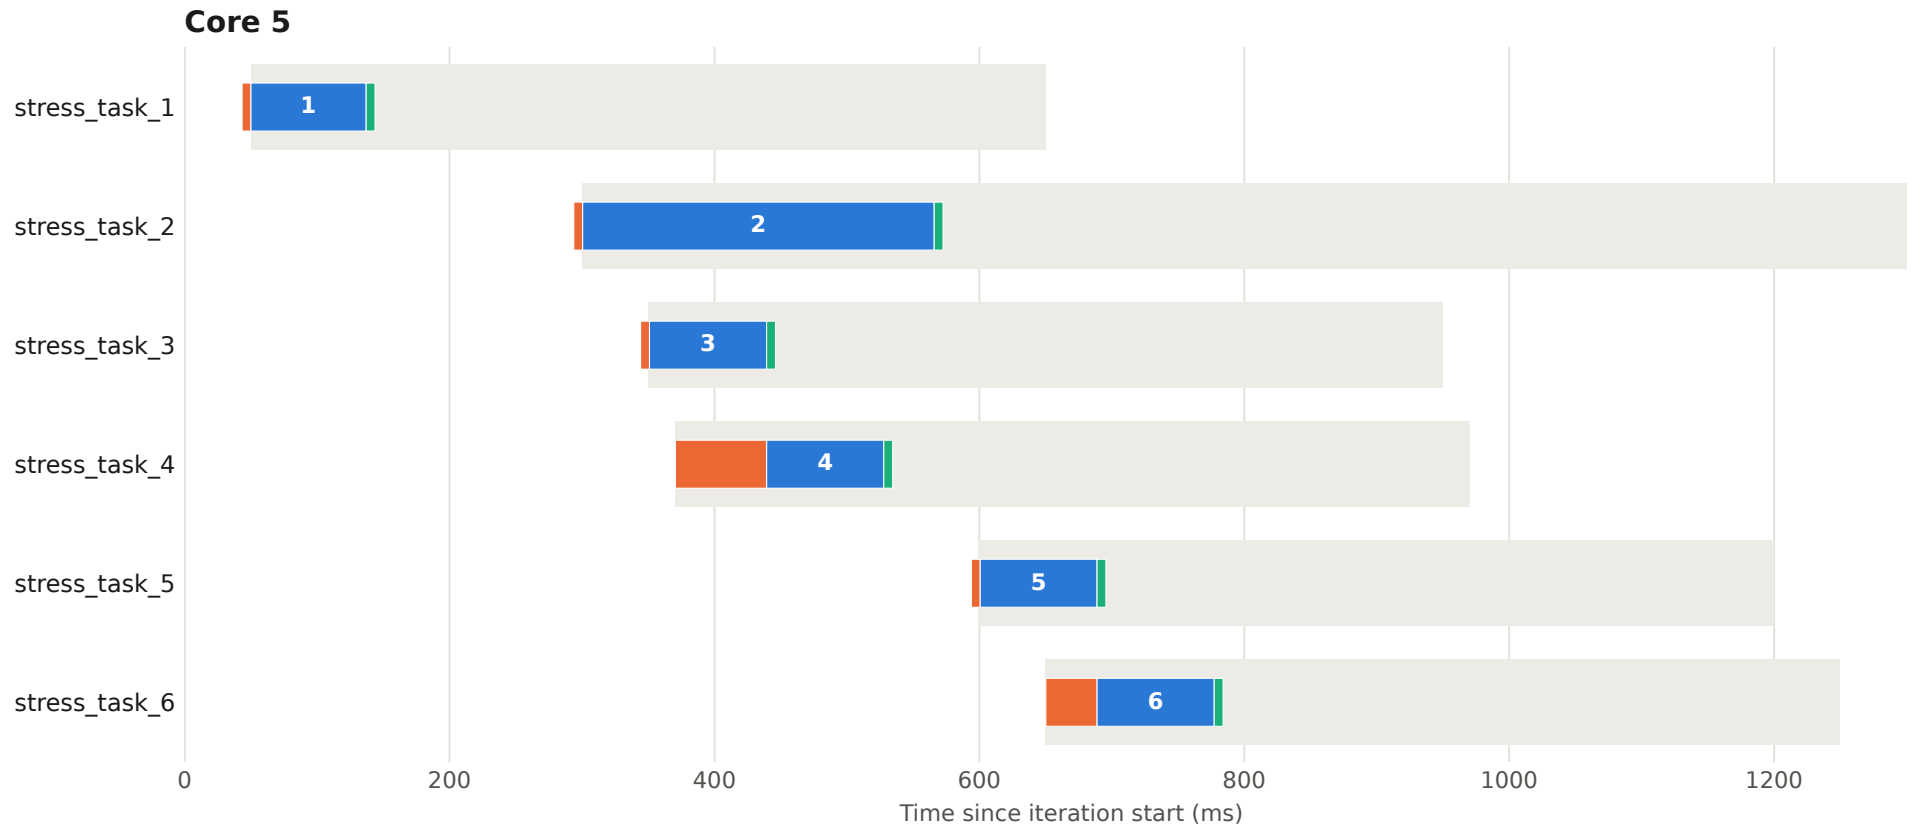


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 89

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

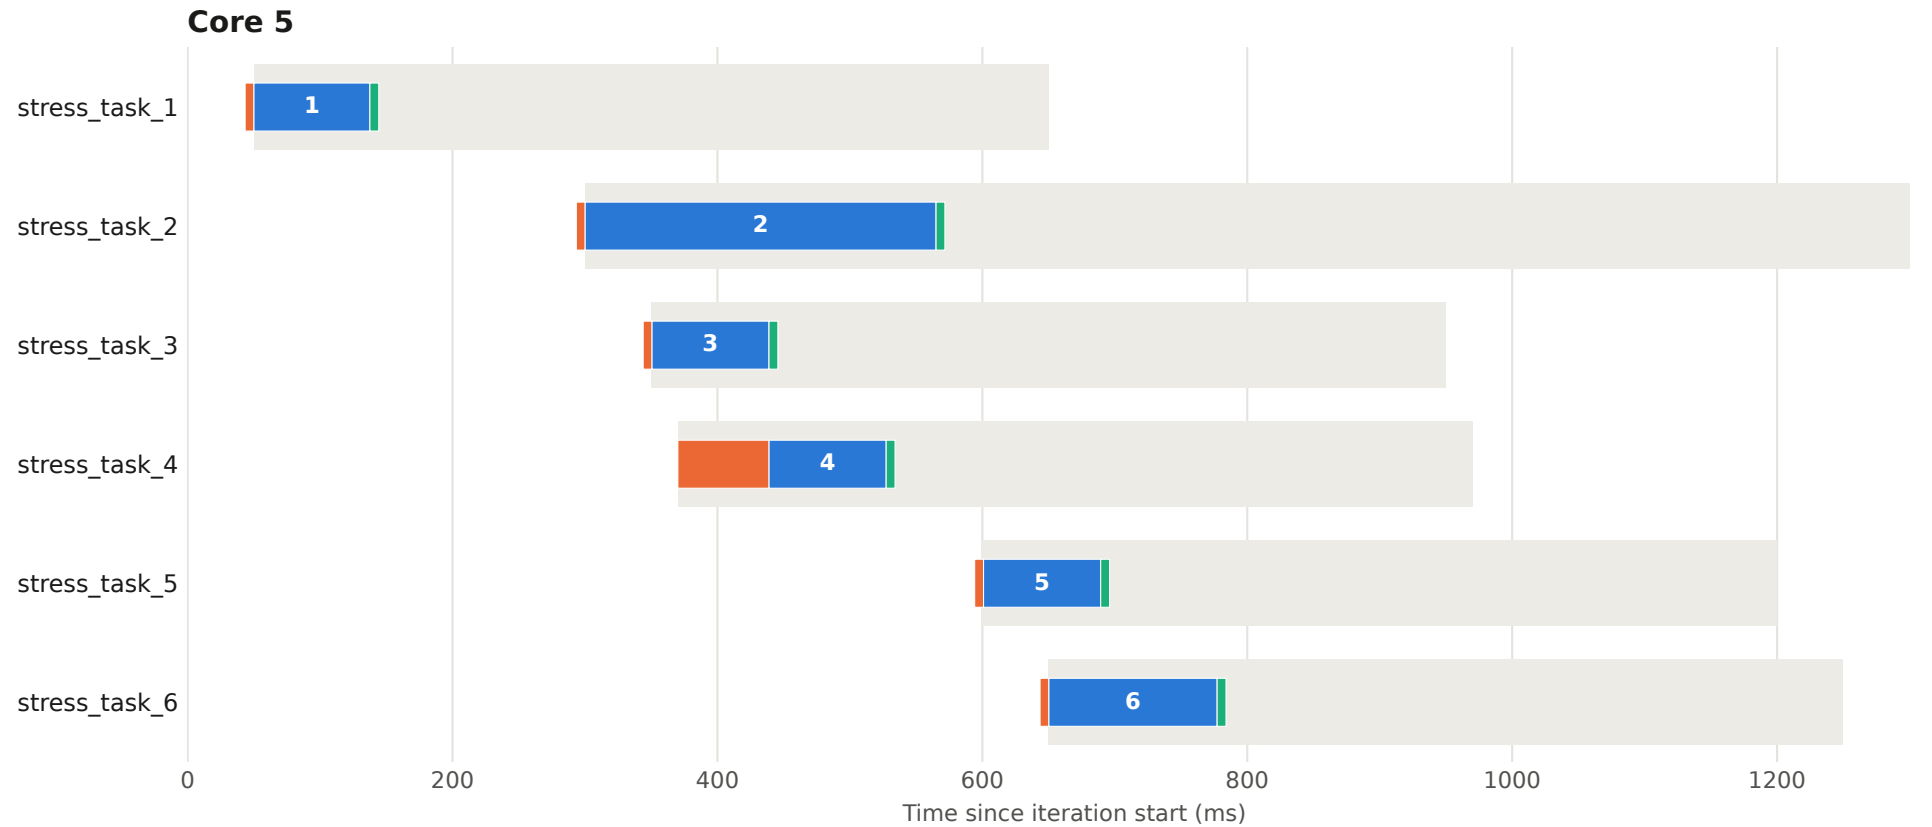


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 90

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

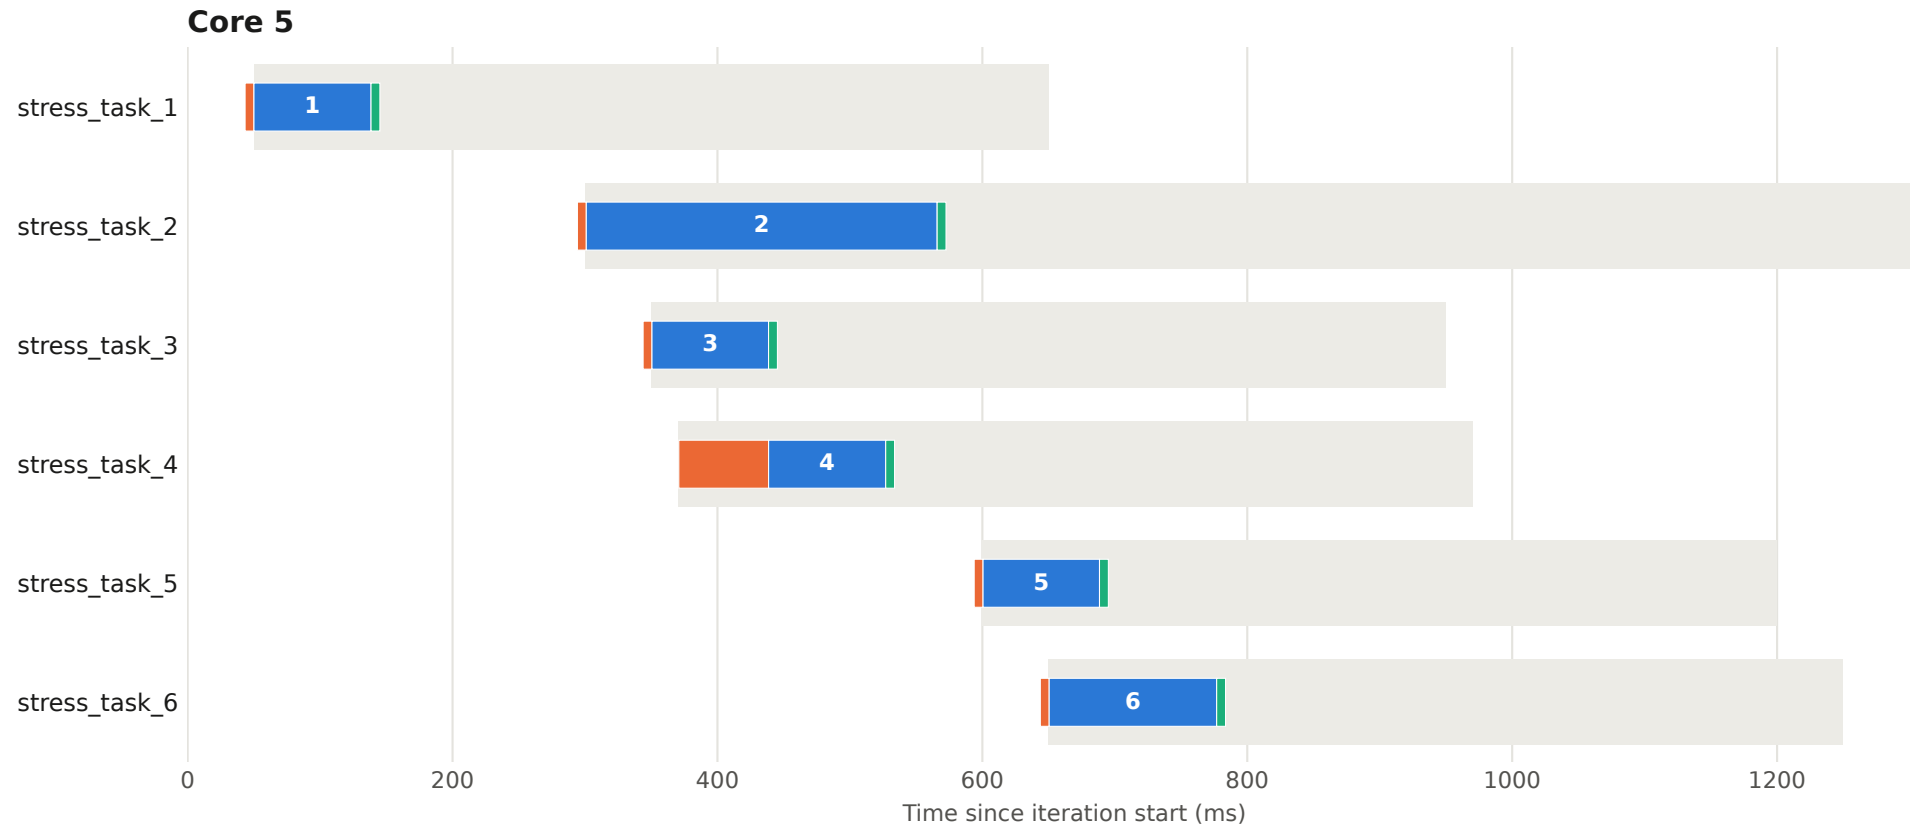


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 91

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

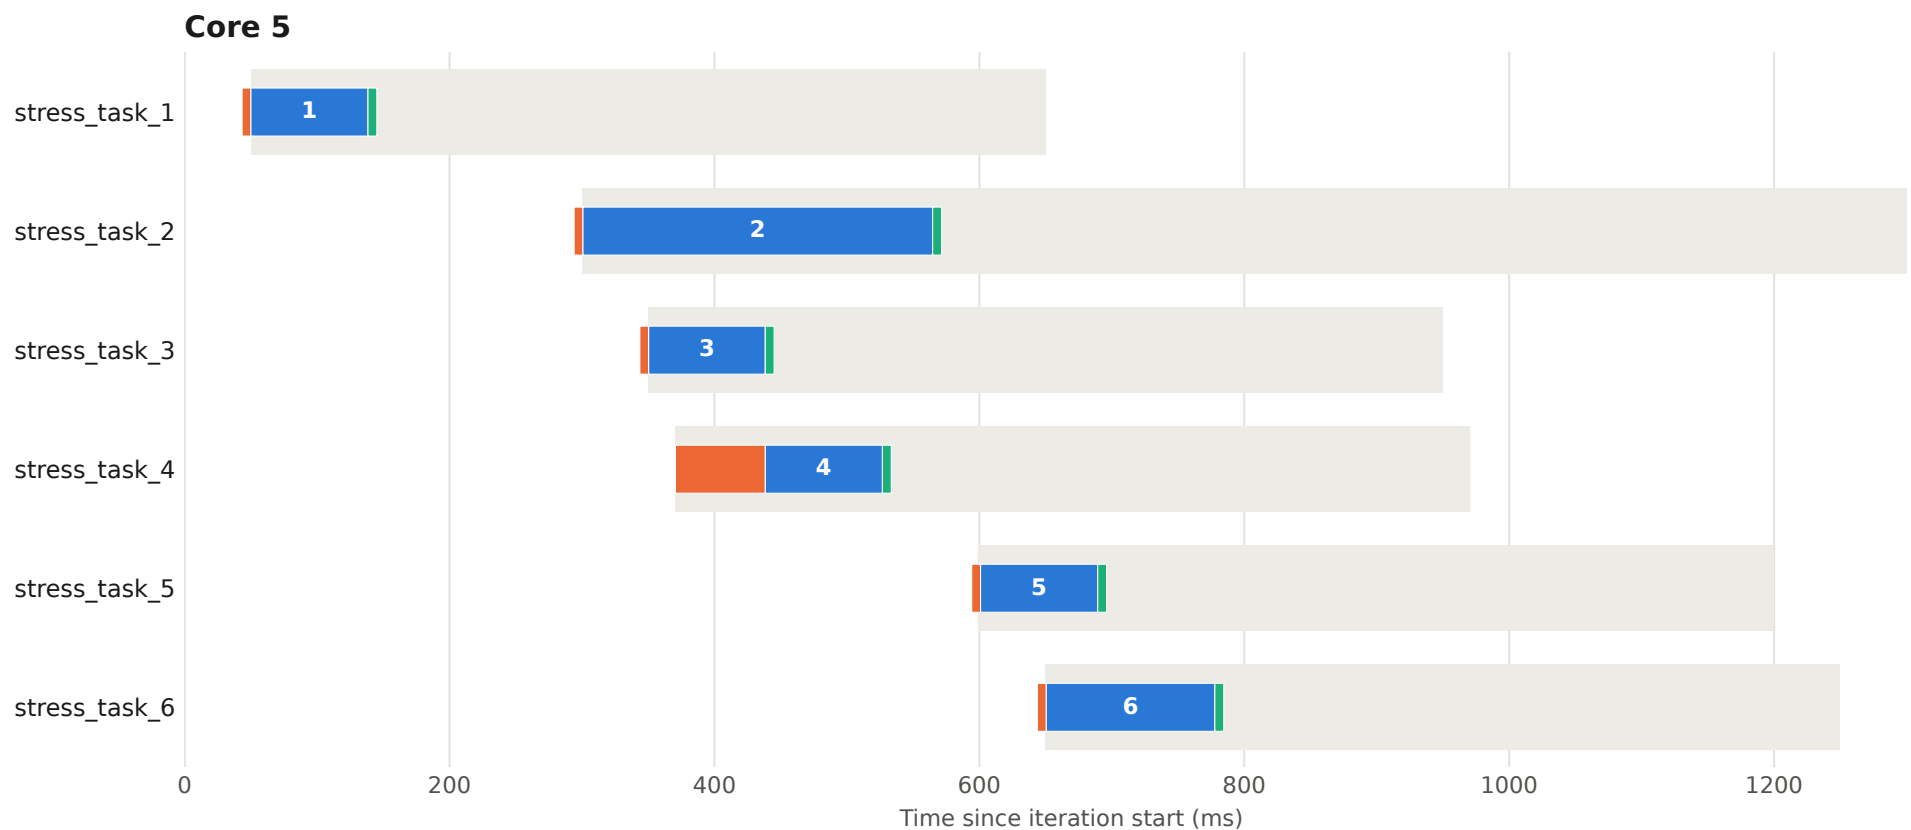


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 92

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

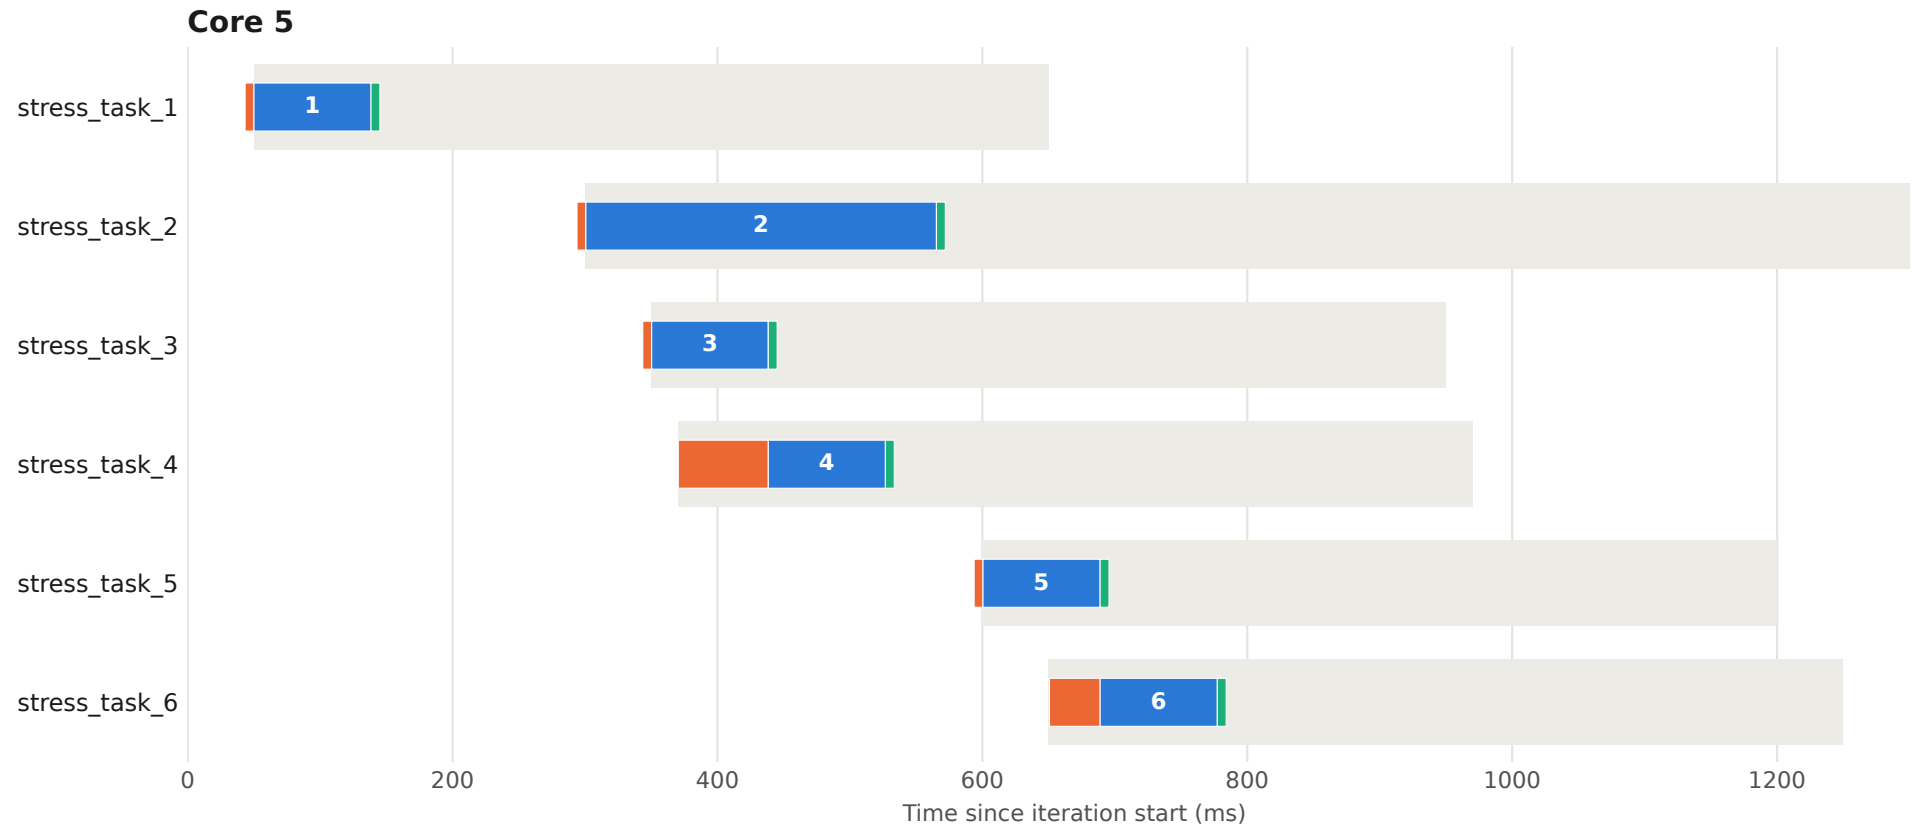


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 93

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

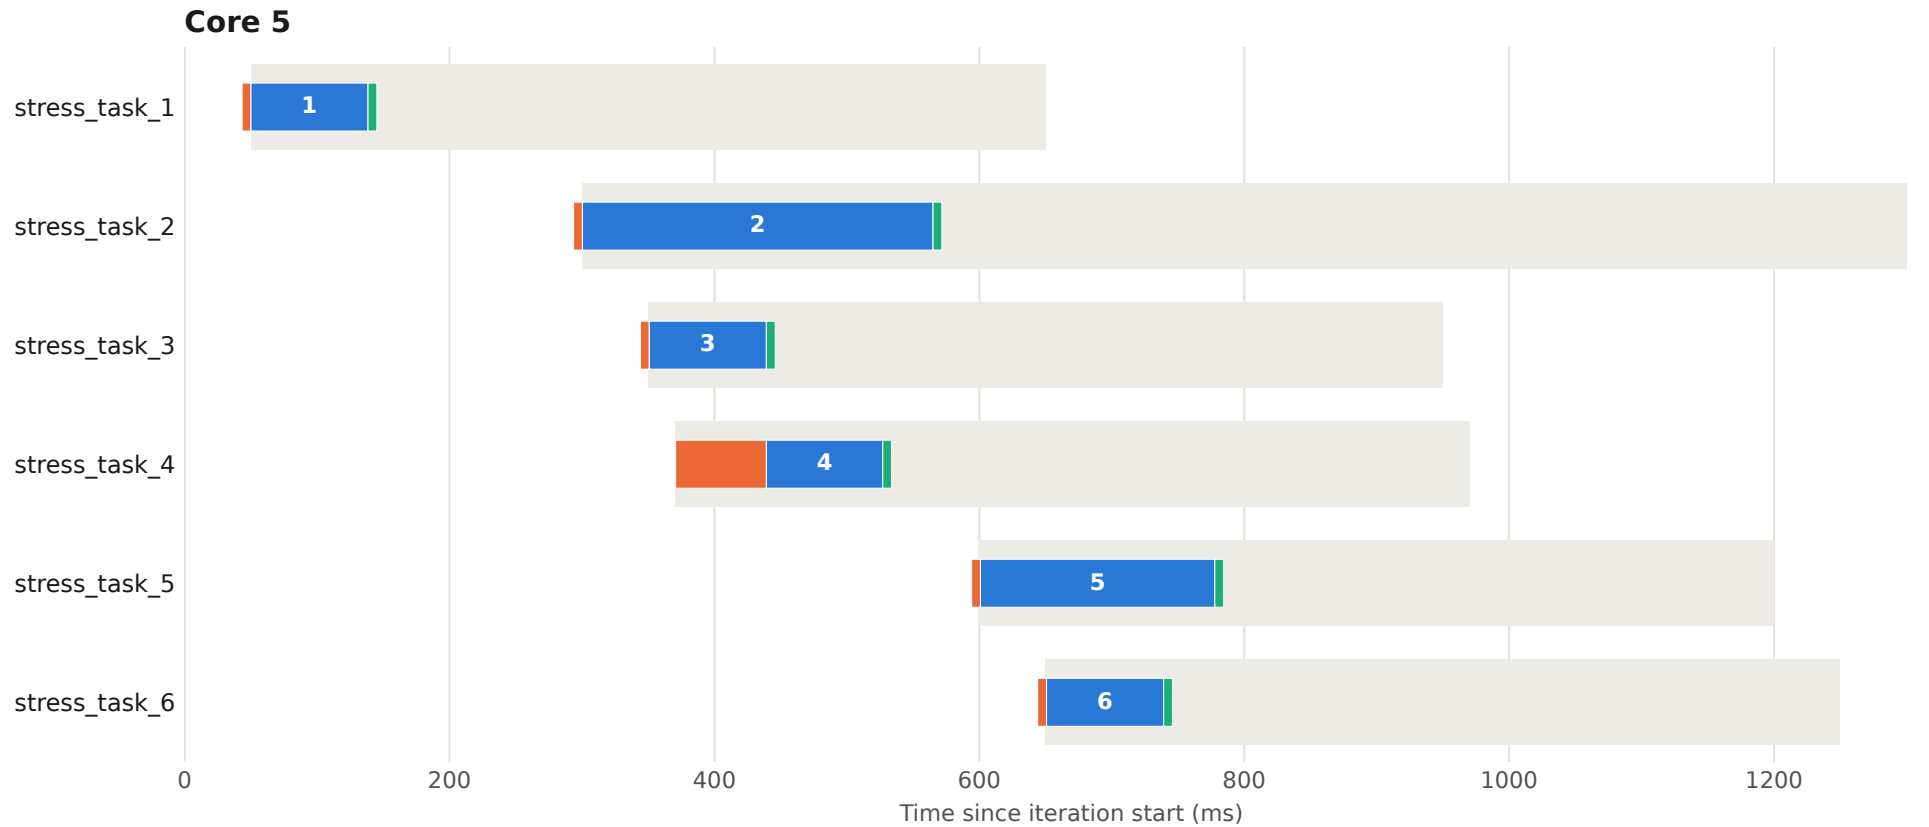


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 94

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

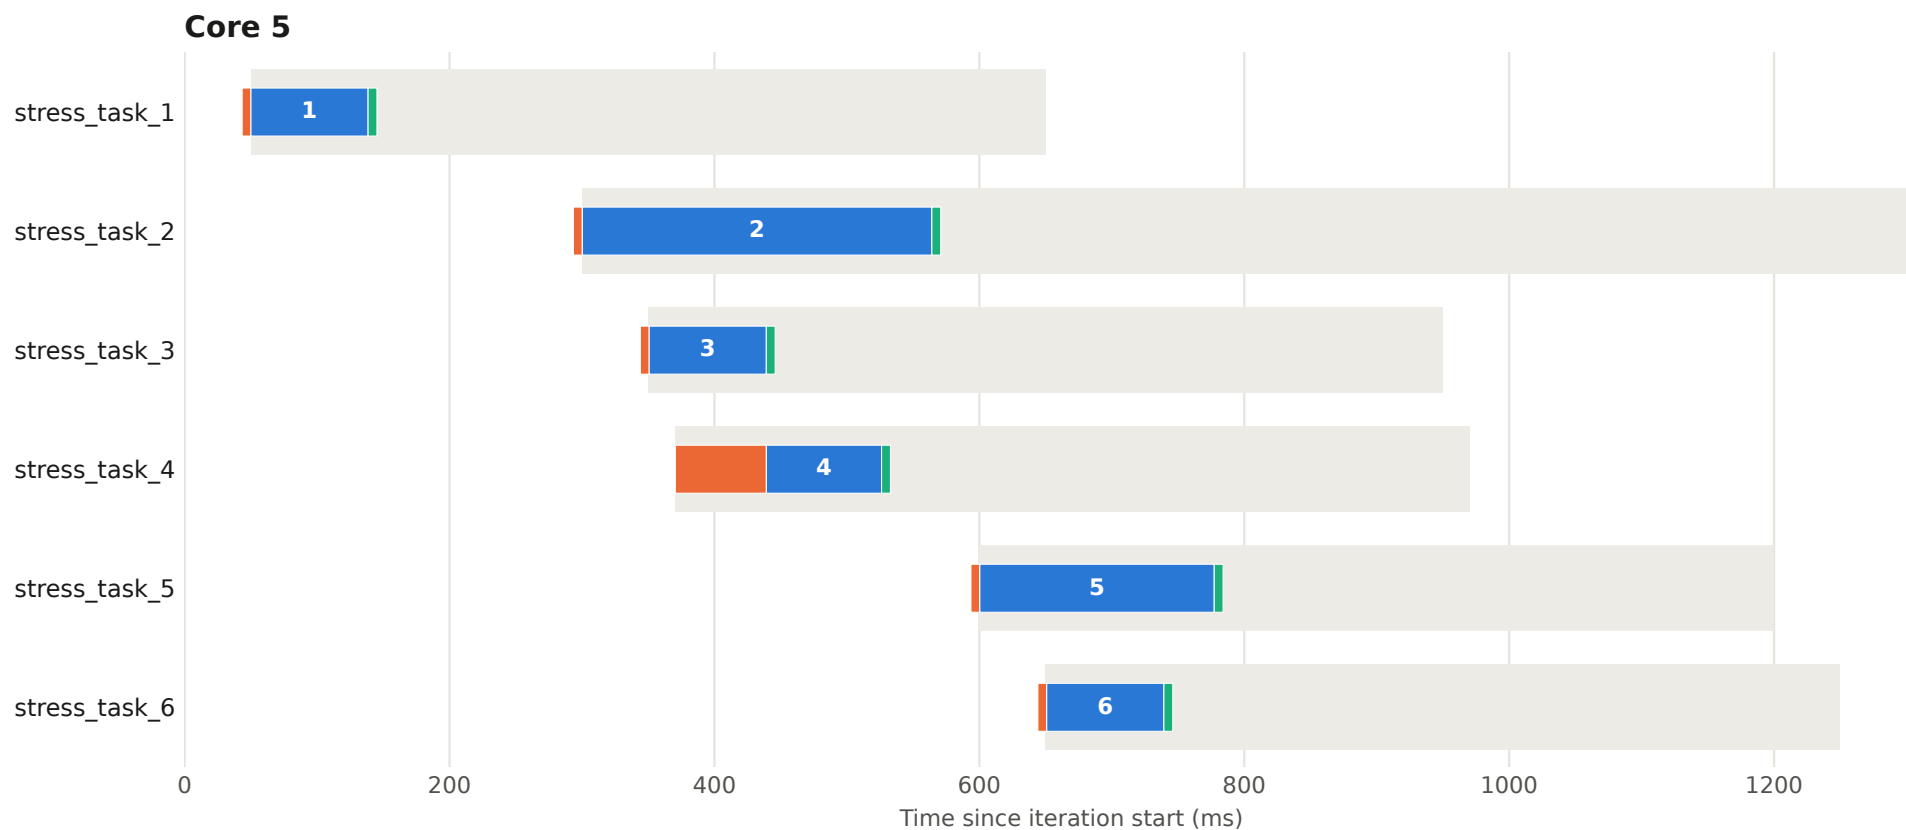


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 95

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

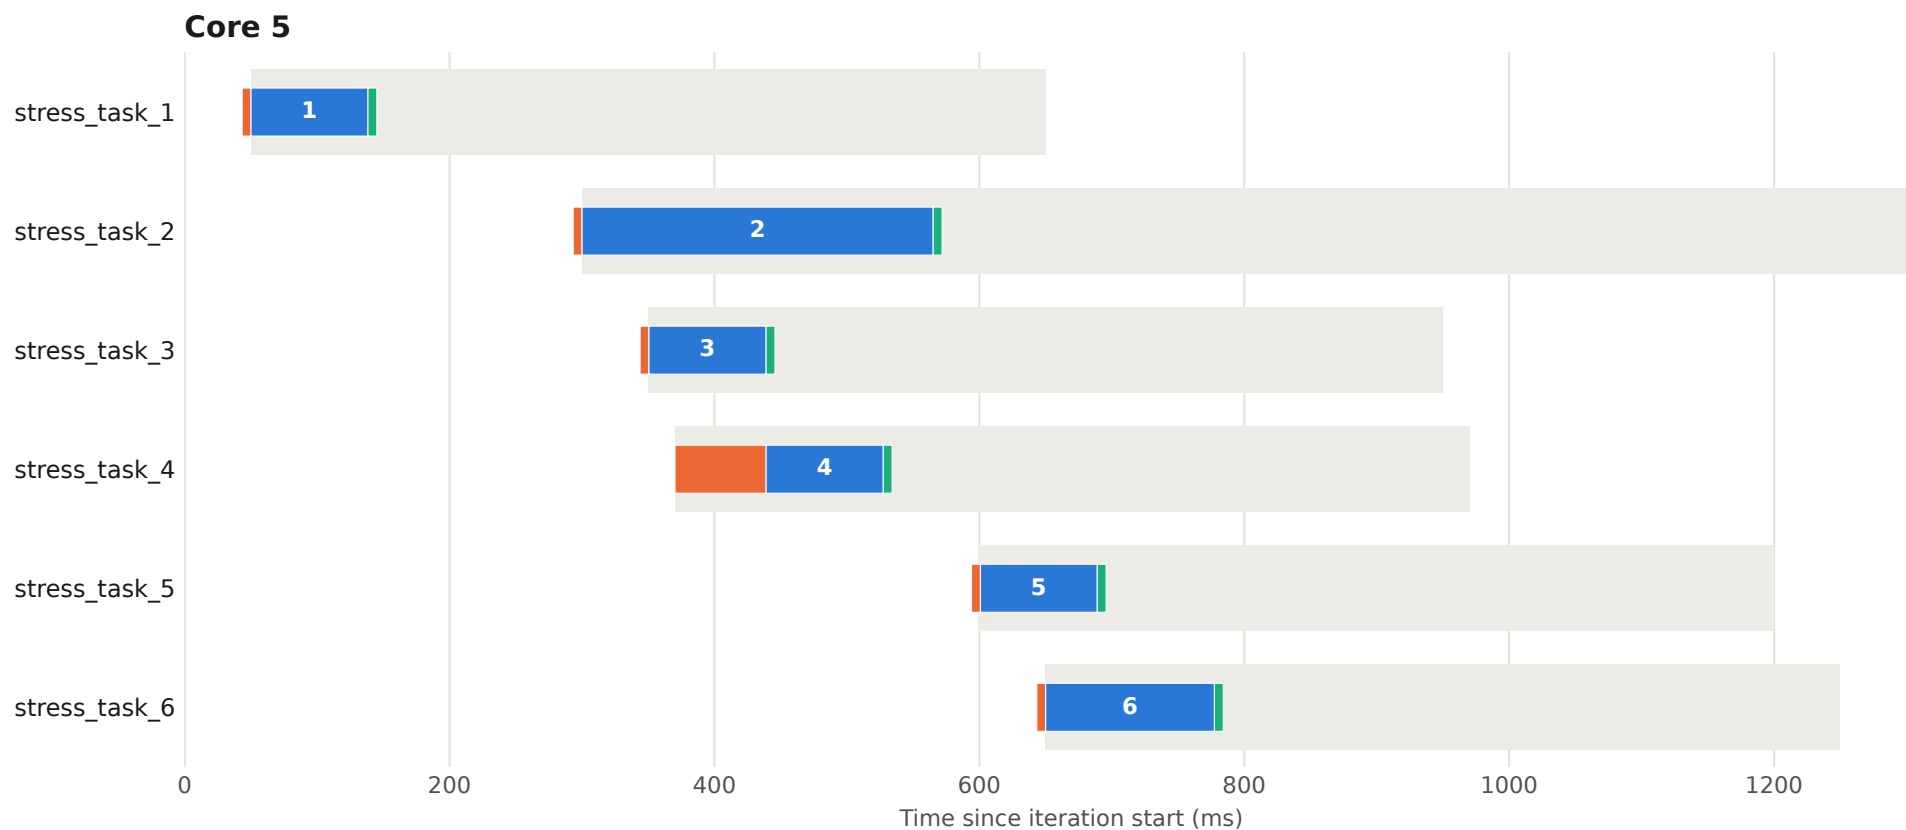


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 96

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

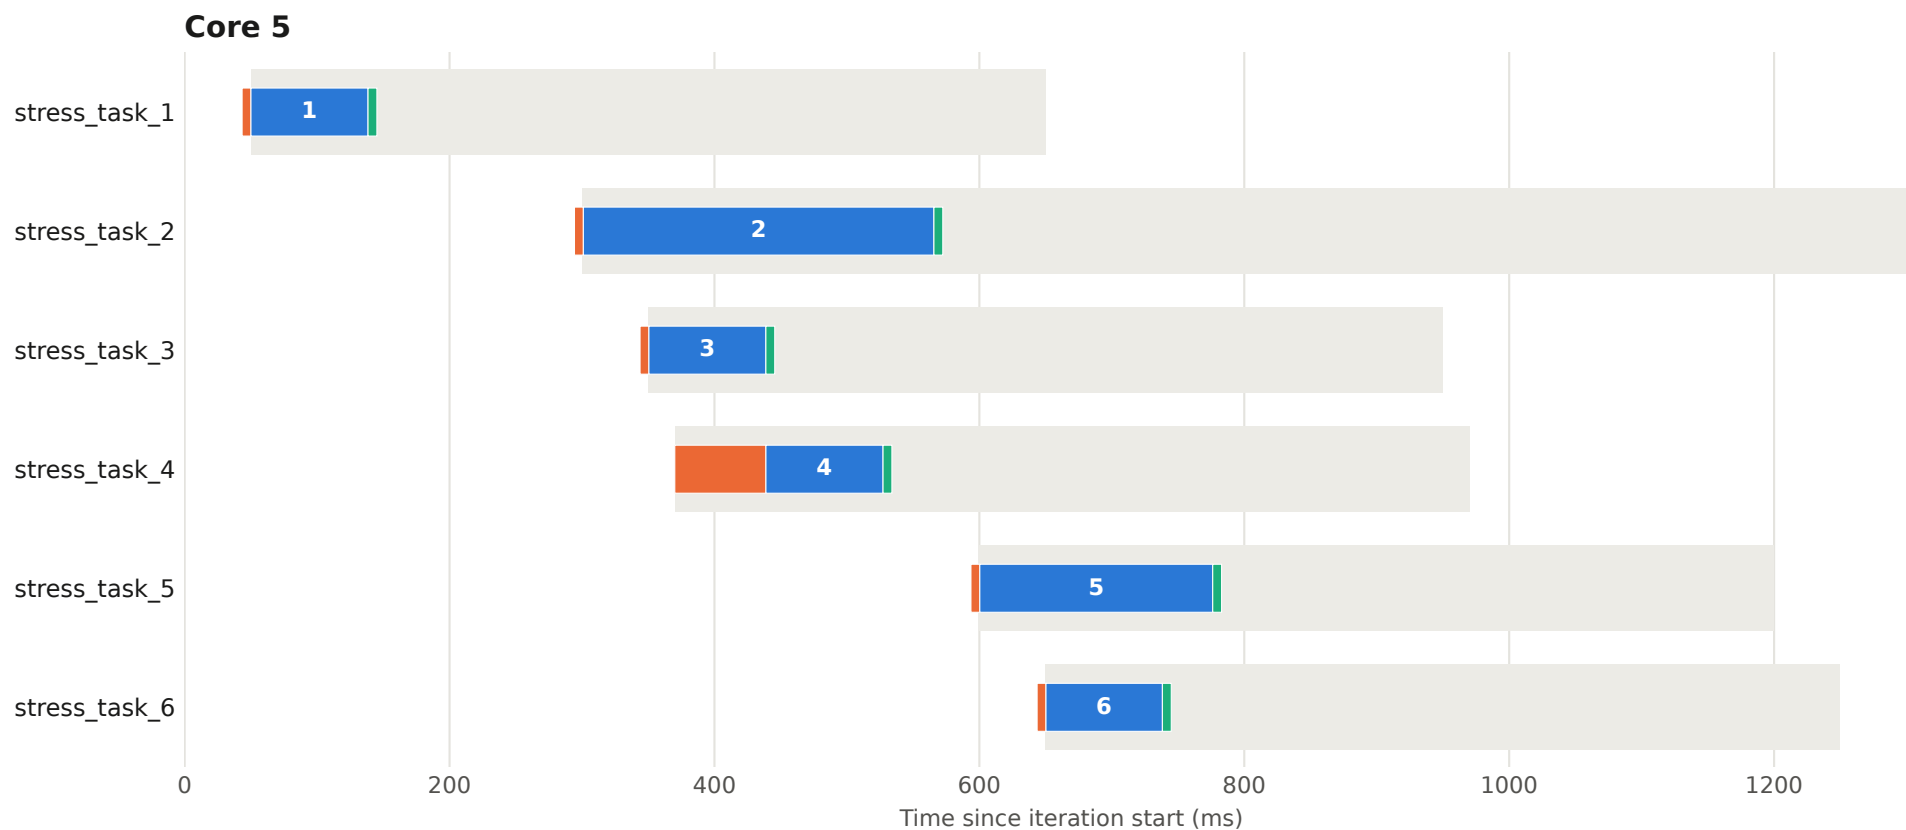


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 97

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

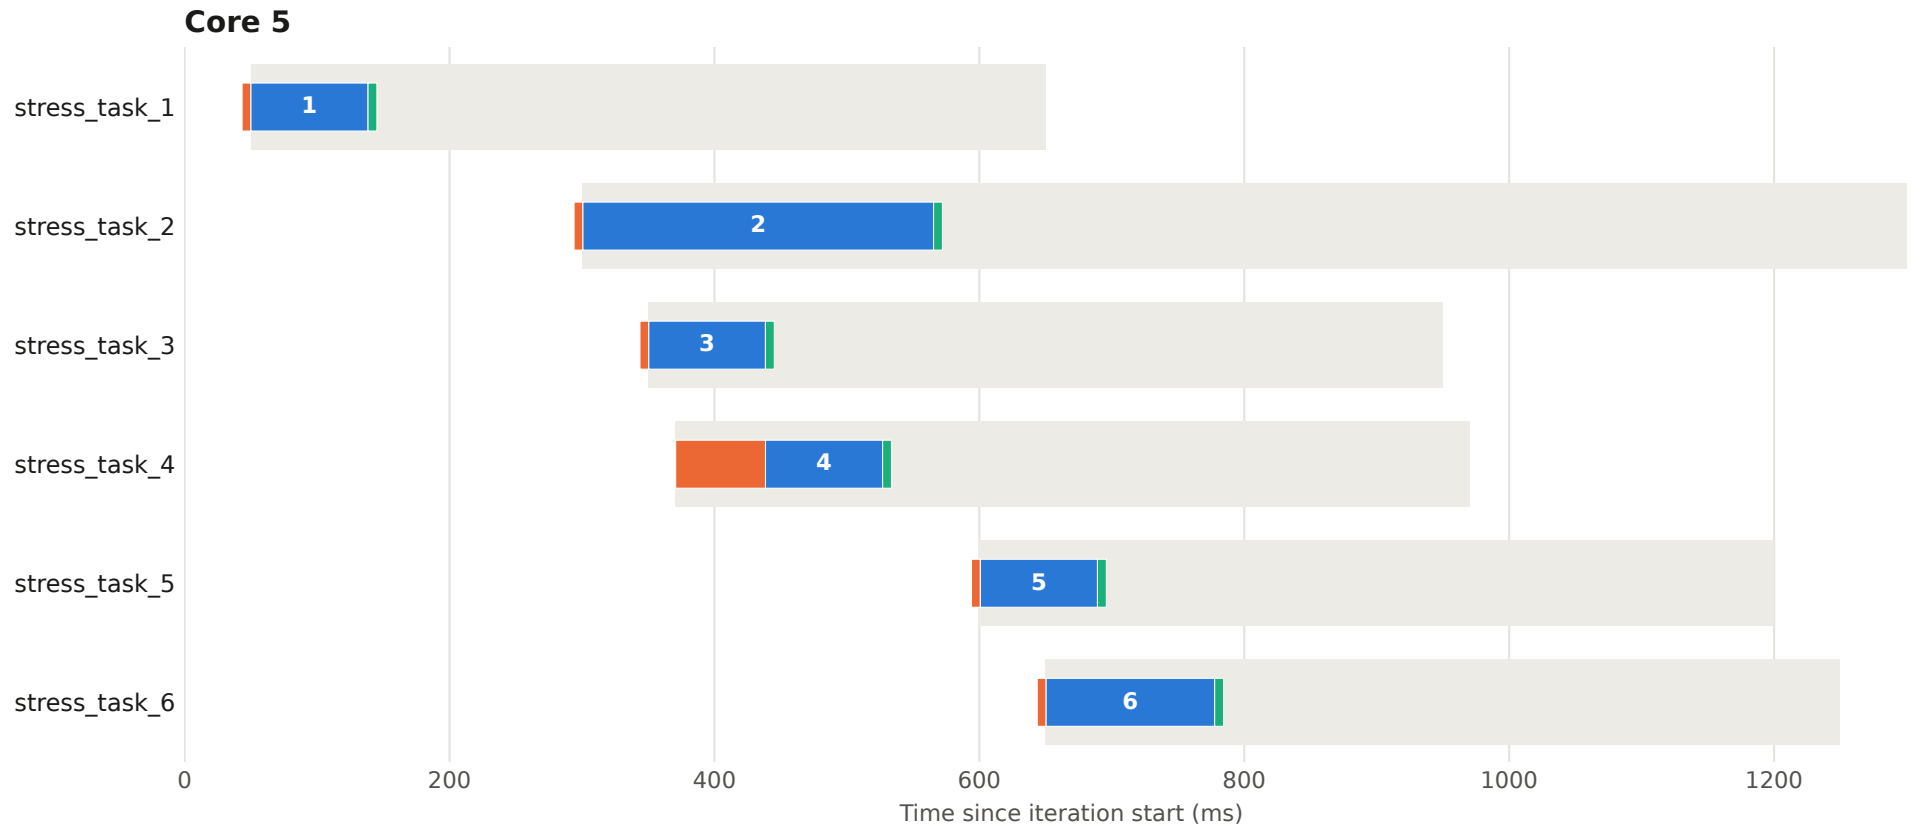


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 98

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

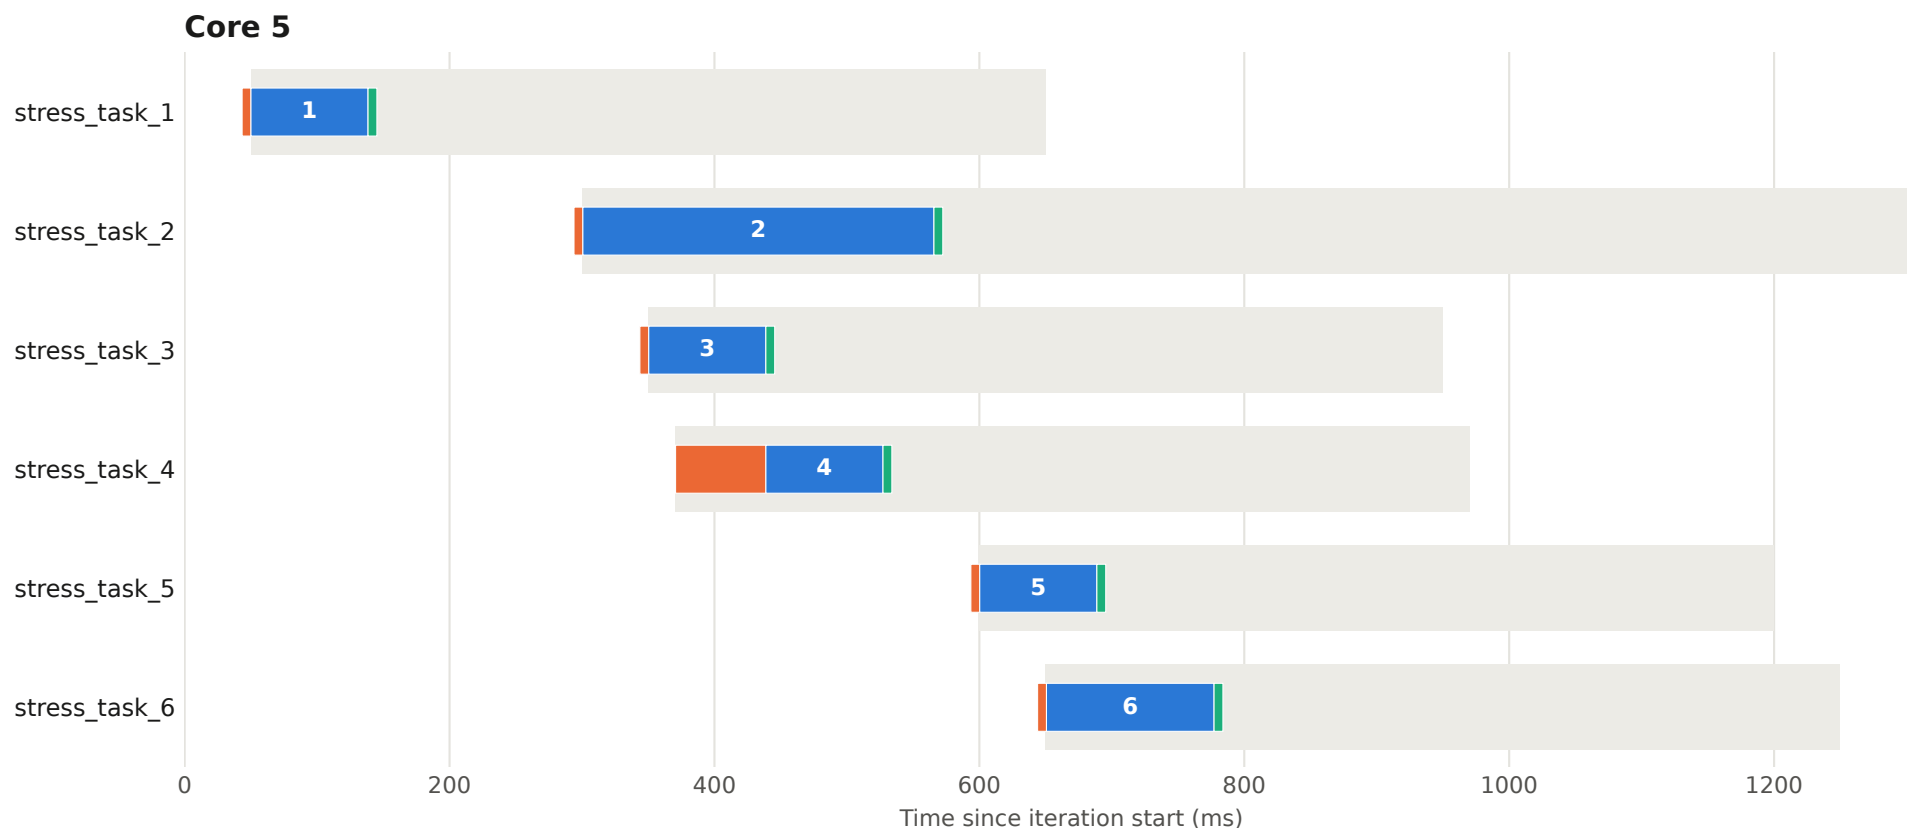


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 99

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

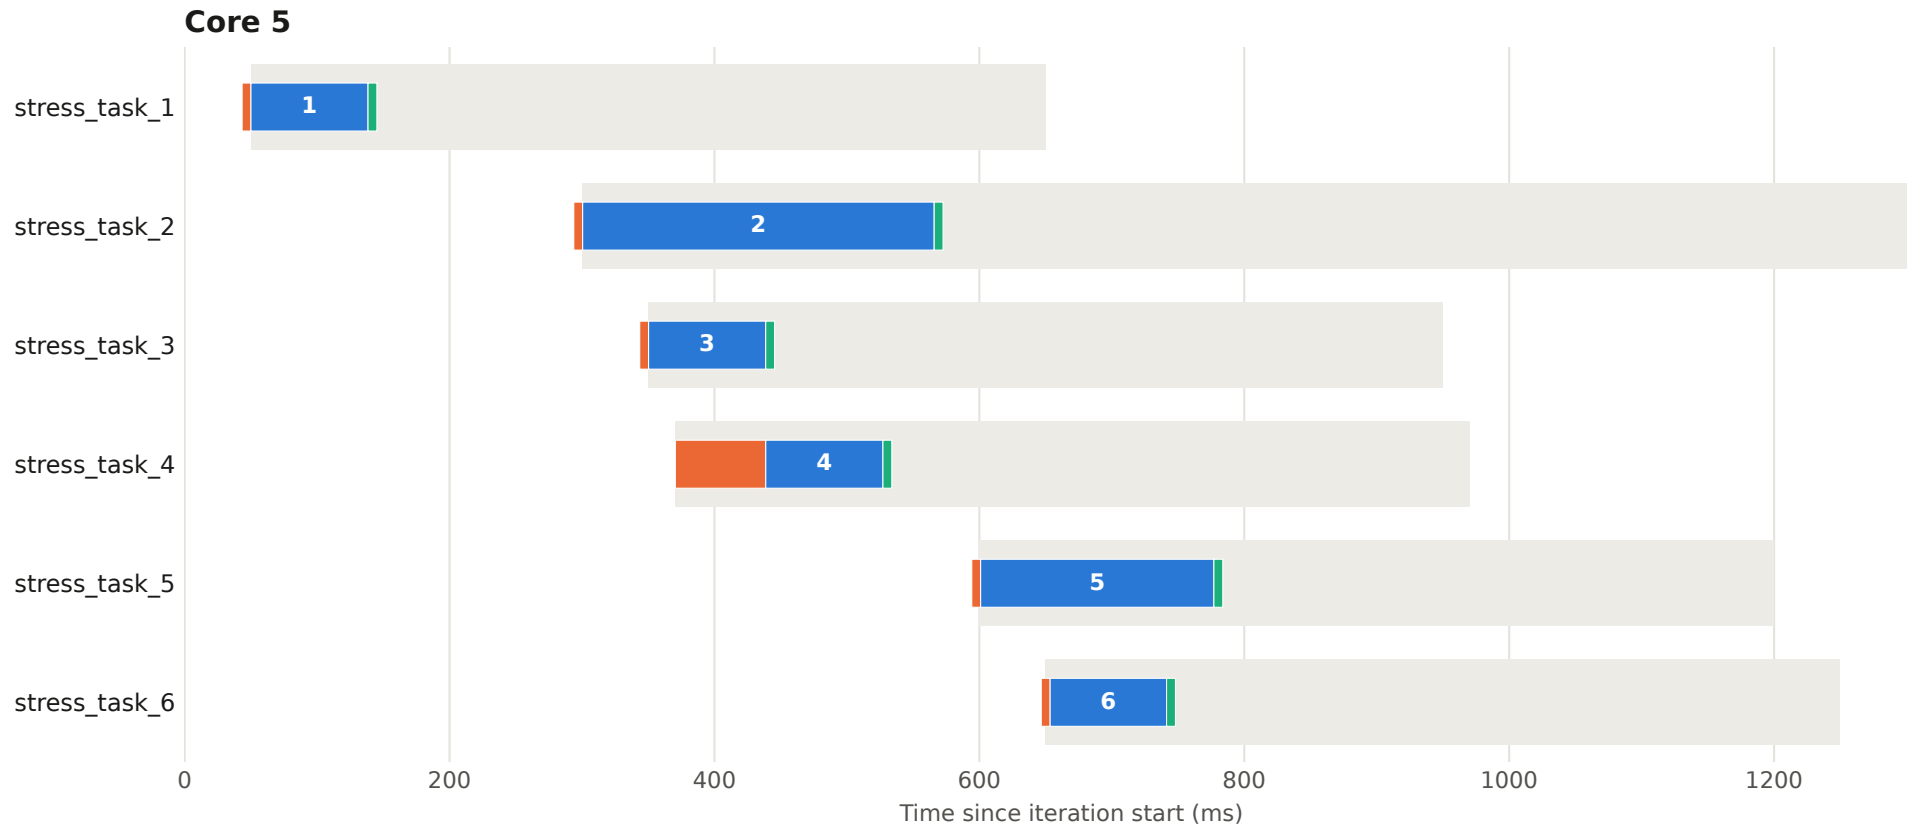

Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.