

Performance report

choreography-mqueue | test_penta_core_mix_1

Generated	2026-09-25 12:06:38
Schedule	Configurable CPU/IO Benchmark
Iterations in logs	100 (#0 - #99), manifest declares 100
Tasks	1=stress_task_1, 2=stress_task_2, 3=stress_task_3, 4=stress_task_4, 5=stress_task_5, 6=stress_task_6, 7=stress_task_1, 8=stress_task_2, 9=stress_task_3, 10=stress_task_4, 11=stress_task_5, 12=stress_task_6, 13=stress_task_1, 14=stress_task_2, 15=stress_task_3, 16=stress_task_4, 17=stress_task_5, 18=stress_task_6, 19=stress_task_1, 20=stress_task_2, 21=stress_task_3, 22=stress_task_4, 23=stress_task_5, 24=stress_task_6, 25=stress_task_1, 26=stress_task_2, 27=stress_task_3, 28=stress_task_4, 29=stress_task_5, 30=stress_task_6

Cores used 3, 4, 5, 6, 7, 62026, 72026

PERF records 2905 (5 malformed skipped)

Log sources stress_task_1.log, stress_task_2.log, stress_task_3.log, stress_task_4.log, stress_task_5.log, stress_task_6.log

Statistics summary

All values in milliseconds | samples per task: 54-100 iteration(s) | tasks 1-6

Task ID	Image name	Metric	Mean	Std Dev	Min	Max	Median	p99
1	stress_task_1	q_em_tw_ms	46.220	27.768	0.058	77.282	68.355	76.703
		t_in_tw_ms	35097.668	30544.949	1529.871	123316.886	25640.556	110870.617
		q_tw_em_ms	0.017	0.008	0.010	0.048	0.013	0.047
		total_ms	35143.906	30537.130	1604.165	123317.001	25713.617	110870.725
2	stress_task_2	q_em_tw_ms	0.508	2.453	0.043	16.761	0.064	11.690
		t_in_tw_ms	39197.916	25119.600	1953.458	84699.083	34587.694	83969.037
		q_tw_em_ms	0.017	0.007	0.010	0.038	0.014	0.036
		total_ms	39198.440	25119.265	1953.529	84699.193	34587.762	83969.128
3	stress_task_3	q_em_tw_ms	1.314	6.604	0.044	46.334	0.053	37.396
		t_in_tw_ms	385.571	23.902	367.876	420.093	368.812	419.968
		q_tw_em_ms	0.015	0.004	0.011	0.033	0.014	0.032
		total_ms	386.899	23.927	367.939	420.171	368.913	420.052
4	stress_task_4	q_em_tw_ms	1134.291	70.760	717.055	1196.916	1139.738	1194.493
		t_in_tw_ms	557.450	1688.585	366.704	17187.192	368.258	759.333
		q_tw_em_ms	0.015	0.003	0.010	0.032	0.015	0.025
		total_ms	1691.756	1690.494	1134.497	18327.543	1550.803	1902.930
5	stress_task_5	q_em_tw_ms	518.510	58.244	118.094	544.105	537.804	543.286
		t_in_tw_ms	393.554	46.706	367.191	784.955	370.739	430.567
		q_tw_em_ms	11.656	66.297	0.011	417.458	0.019	368.395
		total_ms	923.720	93.973	536.807	1325.440	909.899	1276.531
6	stress_task_6	q_em_tw_ms	86.913	23.969	67.284	120.200	68.922	120.051
		t_in_tw_ms	405.340	114.084	367.605	1203.179	371.433	1160.256
		q_tw_em_ms	7.993	79.745	0.010	797.466	0.019	8.010
		total_ms	500.245	139.372	435.488	1288.680	487.848	1278.935

Statistics summary

All values in milliseconds | samples per task: 54-100 iteration(s) | tasks 7-12

Task ID	Image name	Metric	Mean	Std Dev	Min	Max	Median	p99
7	stress_task_1	q_em_tw_ms	0.171	0.066	0.061	0.280	0.136	0.275
		t_in_tw_ms	88.315	0.655	87.076	91.425	88.572	88.868
		q_tw_em_ms	0.005	0.003	0.003	0.020	0.004	0.017
		total_ms	88.490	0.657	87.223	91.581	88.741	89.025
8	stress_task_2	q_em_tw_ms	0.160	0.078	0.029	0.445	0.130	0.298
		t_in_tw_ms	266.175	0.650	263.930	268.696	266.271	267.186
		q_tw_em_ms	0.005	0.002	0.004	0.017	0.004	0.016
		total_ms	266.341	0.666	264.064	269.145	266.488	267.340
9	stress_task_3	q_em_tw_ms	0.110	0.026	0.027	0.152	0.115	0.150
		t_in_tw_ms	88.763	0.413	87.593	91.617	88.832	89.213
		q_tw_em_ms	0.005	0.002	0.004	0.017	0.004	0.015
		total_ms	88.877	0.411	87.723	91.764	88.951	89.299
10	stress_task_4	q_em_tw_ms	68.879	0.660	67.125	71.906	68.843	69.896
		t_in_tw_ms	88.643	0.299	87.356	89.372	88.760	88.928
		q_tw_em_ms	0.004	0.001	0.003	0.014	0.004	0.004
		total_ms	157.525	0.835	154.485	161.282	157.550	158.623
11	stress_task_5	q_em_tw_ms	0.123	0.037	0.058	0.442	0.123	0.151
		t_in_tw_ms	154.015	39.808	87.876	178.819	177.880	178.814
		q_tw_em_ms	0.006	0.003	0.004	0.018	0.005	0.017
		total_ms	154.144	39.803	88.002	178.953	178.014	178.949
12	stress_task_6	q_em_tw_ms	0.124	0.055	0.059	0.583	0.113	0.238
		t_in_tw_ms	108.257	77.805	87.941	854.205	89.314	144.985
		q_tw_em_ms	0.005	0.005	0.003	0.049	0.004	0.018
		total_ms	108.386	77.809	88.053	854.369	89.430	145.563

Statistics summary

All values in milliseconds | samples per task: 54-100 iteration(s) | tasks 13-18

Task ID	Image name	Metric	Mean	Std Dev	Min	Max	Median	p99
13	stress_task_1	q_em_tw_ms	0.033	0.023	0.024	0.259	0.029	0.047
		t_in_tw_ms	88.515	0.800	87.174	94.565	88.590	91.322
		q_tw_em_ms	0.005	0.003	0.003	0.024	0.004	0.020
		total_ms	88.553	0.809	87.207	94.602	88.621	91.582
14	stress_task_2	q_em_tw_ms	0.031	0.013	0.024	0.150	0.029	0.047
		t_in_tw_ms	265.884	0.503	264.154	267.557	265.916	266.784
		q_tw_em_ms	0.005	0.002	0.004	0.023	0.004	0.016
		total_ms	265.920	0.508	264.187	267.711	265.950	266.820
15	stress_task_3	q_em_tw_ms	0.034	0.058	0.025	0.611	0.027	0.044
		t_in_tw_ms	88.635	0.329	87.318	90.678	88.710	88.932
		q_tw_em_ms	0.004	0.001	0.003	0.016	0.004	0.009
		total_ms	88.673	0.367	87.354	91.293	88.740	88.968
16	stress_task_4	q_em_tw_ms	68.678	0.591	67.305	71.438	68.617	69.659
		t_in_tw_ms	88.637	0.301	87.321	89.402	88.770	88.949
		q_tw_em_ms	0.003	0.001	0.003	0.015	0.003	0.004
		total_ms	157.318	0.679	155.519	160.843	157.239	158.450
17	stress_task_5	q_em_tw_ms	0.031	0.011	0.024	0.134	0.029	0.047
		t_in_tw_ms	169.298	25.536	87.977	177.950	177.329	177.810
		q_tw_em_ms	0.894	8.898	0.003	88.982	0.004	0.905
		total_ms	170.224	24.189	88.010	177.985	177.365	177.843
18	stress_task_6	q_em_tw_ms	0.417	3.871	0.024	38.742	0.028	0.524
		t_in_tw_ms	100.208	77.060	87.377	854.296	88.815	136.246
		q_tw_em_ms	0.005	0.004	0.003	0.035	0.004	0.018
		total_ms	100.630	77.103	87.406	854.360	88.847	136.399

Statistics summary

All values in milliseconds | samples per task: 54-100 iteration(s) | tasks 19-24

Task ID	Image name	Metric	Mean	Std Dev	Min	Max	Median	p99
19	stress_task_1	q_em_tw_ms	0.030	0.011	0.024	0.137	0.029	0.041
		t_in_tw_ms	88.067	0.483	86.674	90.802	88.162	88.439
		q_tw_em_ms	0.006	0.005	0.003	0.037	0.004	0.023
		total_ms	88.103	0.490	86.704	90.945	88.195	88.481
20	stress_task_2	q_em_tw_ms	0.029	0.011	0.024	0.138	0.027	0.039
		t_in_tw_ms	264.564	0.512	262.649	266.243	264.604	265.282
		q_tw_em_ms	0.005	0.004	0.004	0.025	0.004	0.022
		total_ms	264.599	0.515	262.682	266.386	264.643	265.321
21	stress_task_3	q_em_tw_ms	0.029	0.011	0.025	0.133	0.027	0.035
		t_in_tw_ms	88.190	0.348	86.910	90.315	88.288	88.491
		q_tw_em_ms	0.006	0.006	0.003	0.049	0.004	0.028
		total_ms	88.225	0.354	86.952	90.453	88.320	88.523
22	stress_task_4	q_em_tw_ms	68.244	0.661	66.107	71.081	68.263	69.160
		t_in_tw_ms	88.222	0.265	87.533	88.650	88.353	88.523
		q_tw_em_ms	0.004	0.002	0.003	0.021	0.004	0.017
		total_ms	156.470	0.725	154.521	159.735	156.491	157.613
23	stress_task_5	q_em_tw_ms	0.031	0.013	0.024	0.152	0.029	0.050
		t_in_tw_ms	157.975	36.147	87.540	177.411	176.462	177.127
		q_tw_em_ms	0.886	8.812	0.003	88.130	0.004	0.901
		total_ms	158.892	35.499	87.577	177.447	176.500	177.161
24	stress_task_6	q_em_tw_ms	0.404	3.738	0.024	37.219	0.027	0.883
		t_in_tw_ms	97.599	16.590	87.200	129.950	88.396	128.273
		q_tw_em_ms	0.004	0.001	0.003	0.016	0.004	0.007
		total_ms	98.007	16.796	87.231	130.095	88.431	128.305

Statistics summary


All values in milliseconds | samples per task: 54-100 iteration(s) | tasks 25-30

Task ID	Image name	Metric	Mean	Std Dev	Min	Max	Median	p99
25	stress_task_1	q_em_tw_ms	0.082	0.059	0.025	0.169	0.032	0.162
		t_in_tw_ms	87.901	0.618	86.676	90.778	88.141	88.486
		q_tw_em_ms	0.005	0.002	0.003	0.018	0.004	0.017
		total_ms	87.987	0.625	86.714	90.931	88.230	88.522
26	stress_task_2	q_em_tw_ms	0.086	0.067	0.026	0.368	0.034	0.184
		t_in_tw_ms	264.486	0.583	262.596	266.478	264.592	265.308
		q_tw_em_ms	0.005	0.003	0.004	0.018	0.004	0.018
		total_ms	264.577	0.593	262.756	266.851	264.657	265.407
27	stress_task_3	q_em_tw_ms	0.029	0.012	0.024	0.144	0.027	0.046
		t_in_tw_ms	88.157	0.378	86.851	90.194	88.272	88.548
		q_tw_em_ms	0.006	0.005	0.003	0.043	0.004	0.021
		total_ms	88.191	0.385	86.882	90.342	88.304	88.583
28	stress_task_4	q_em_tw_ms	68.212	0.643	65.992	70.908	68.239	69.230
		t_in_tw_ms	88.243	0.289	86.847	89.218	88.353	88.528
		q_tw_em_ms	0.004	0.003	0.003	0.035	0.004	0.011
		total_ms	156.459	0.709	154.317	160.130	156.433	157.625
29	stress_task_5	q_em_tw_ms	0.032	0.032	0.024	0.344	0.028	0.059
		t_in_tw_ms	149.457	40.890	87.580	177.073	176.322	176.983
		q_tw_em_ms	0.005	0.003	0.003	0.024	0.004	0.018
		total_ms	149.493	40.884	87.616	177.110	176.353	177.014
30	stress_task_6	q_em_tw_ms	0.029	0.011	0.024	0.132	0.027	0.051
		t_in_tw_ms	106.702	77.482	86.946	854.171	88.398	136.884
		q_tw_em_ms	0.004	0.002	0.003	0.017	0.004	0.011
		total_ms	106.735	77.483	86.978	854.210	88.433	137.019

Execution plan - iteration 0 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

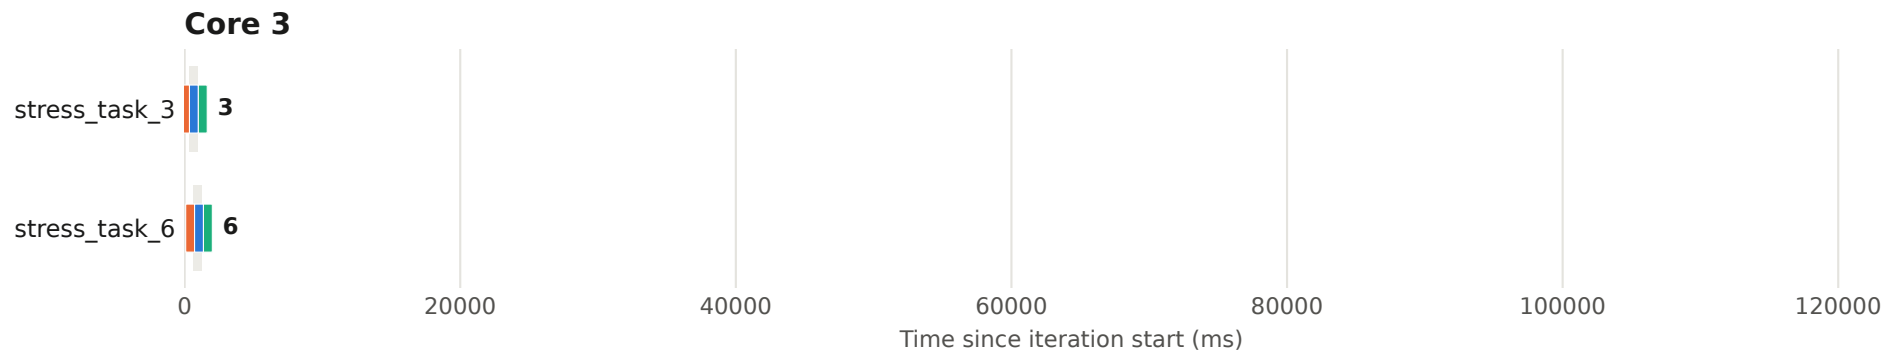

Execution plan - iteration 0 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

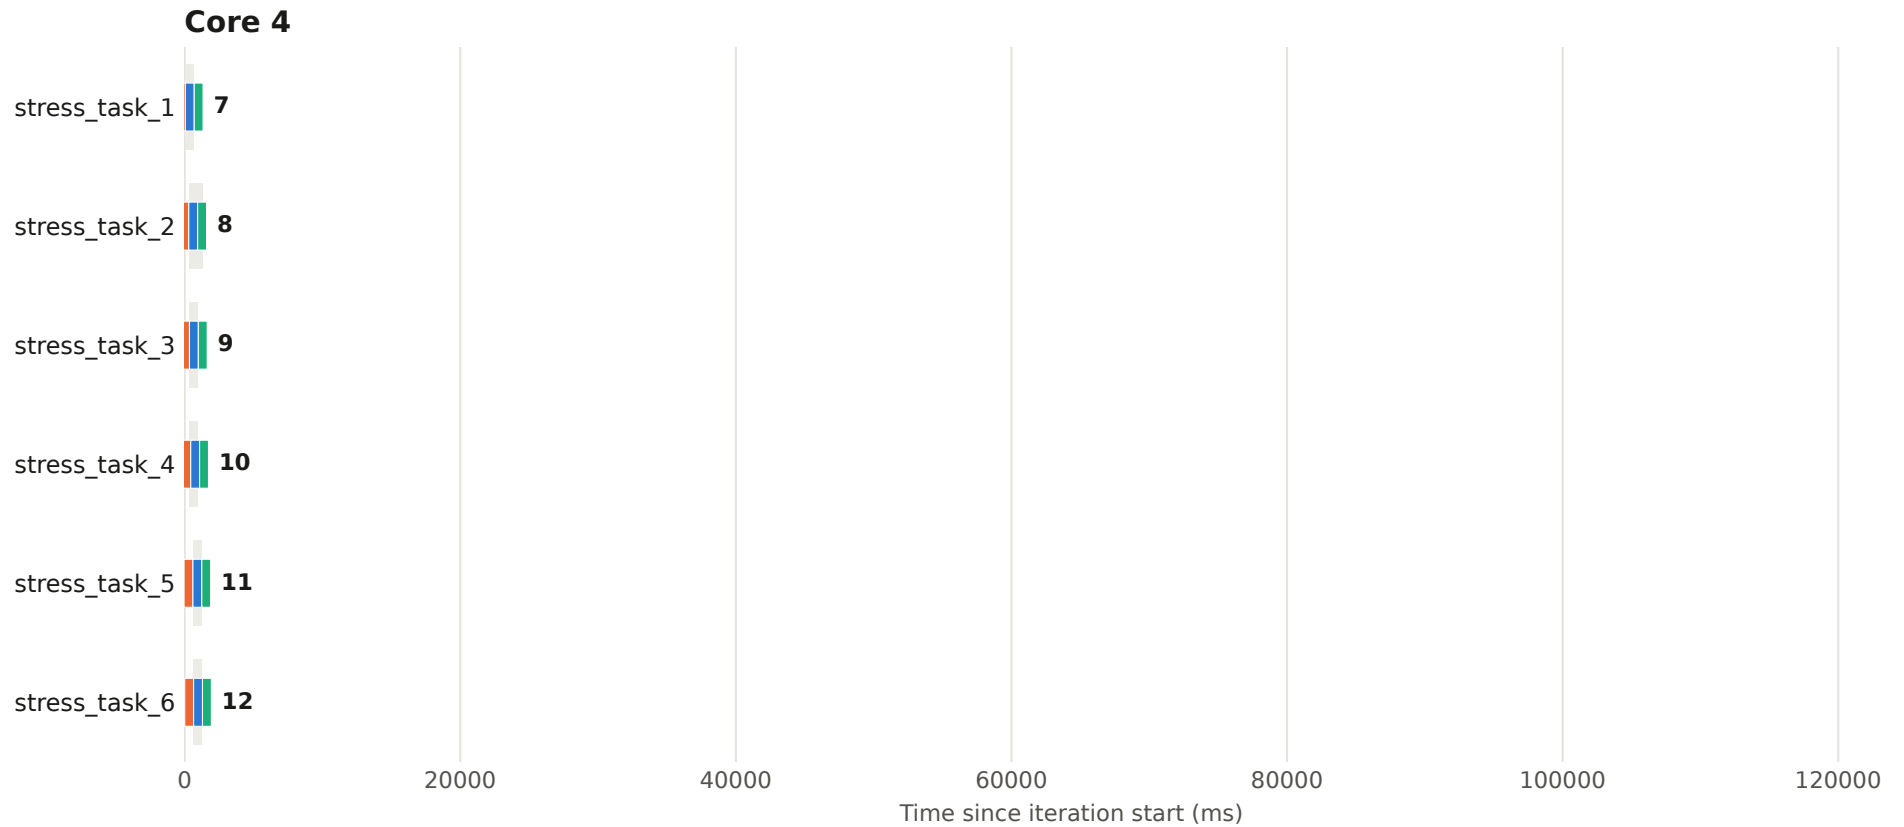


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 0 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

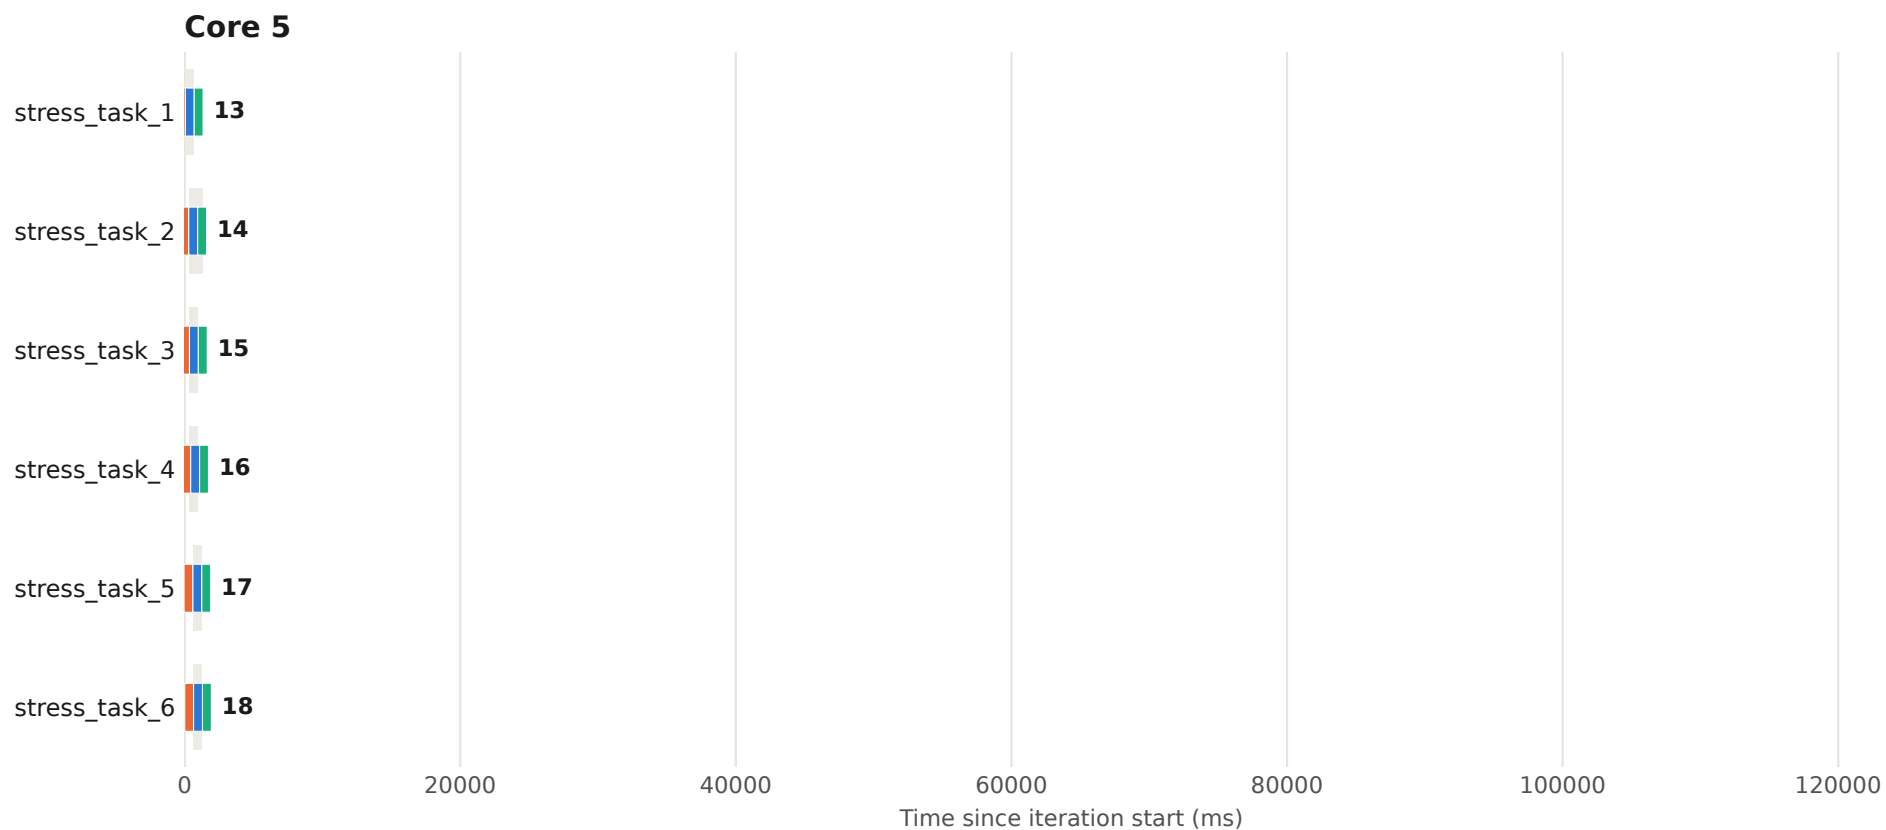


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 0 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

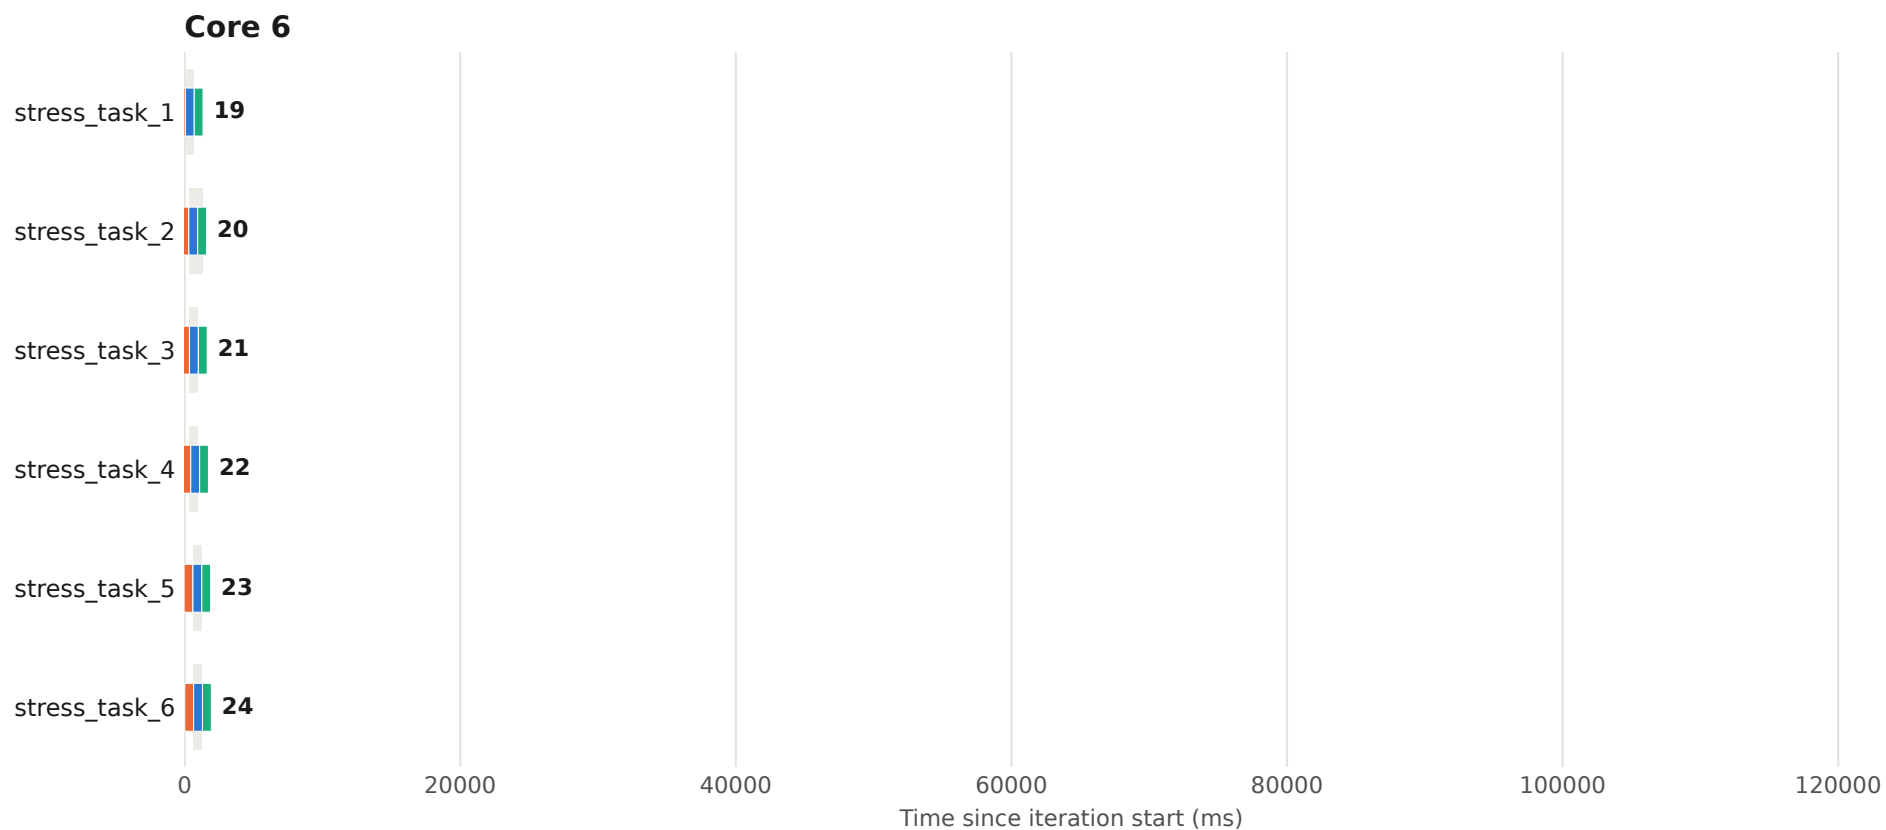


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 0 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

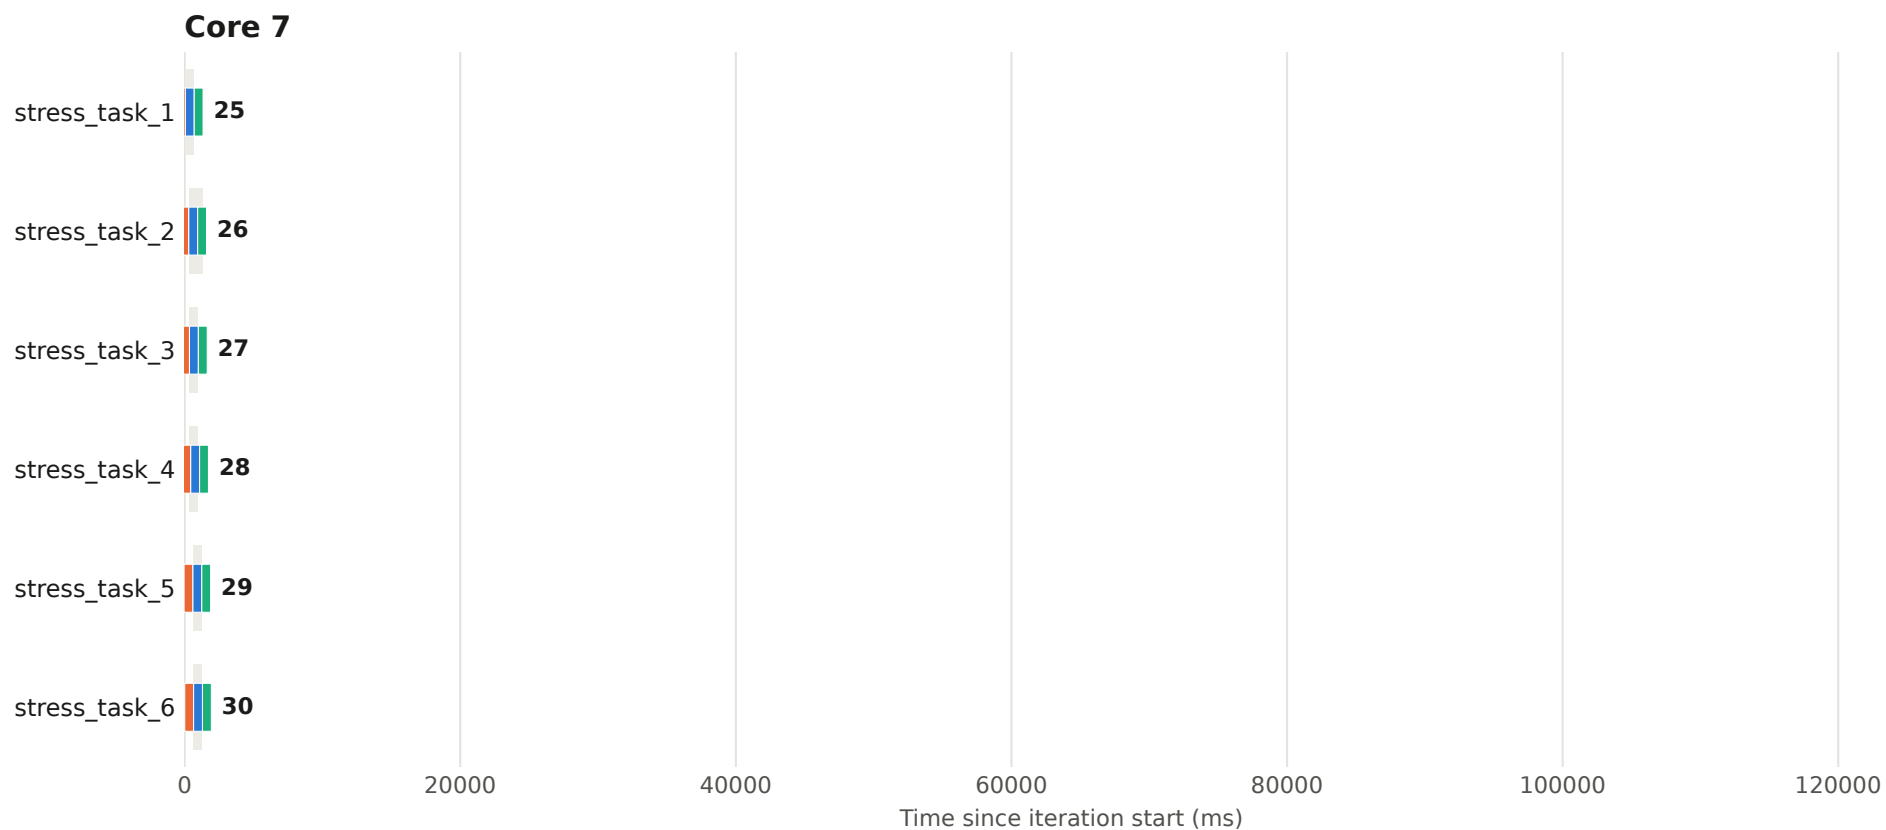


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 1 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

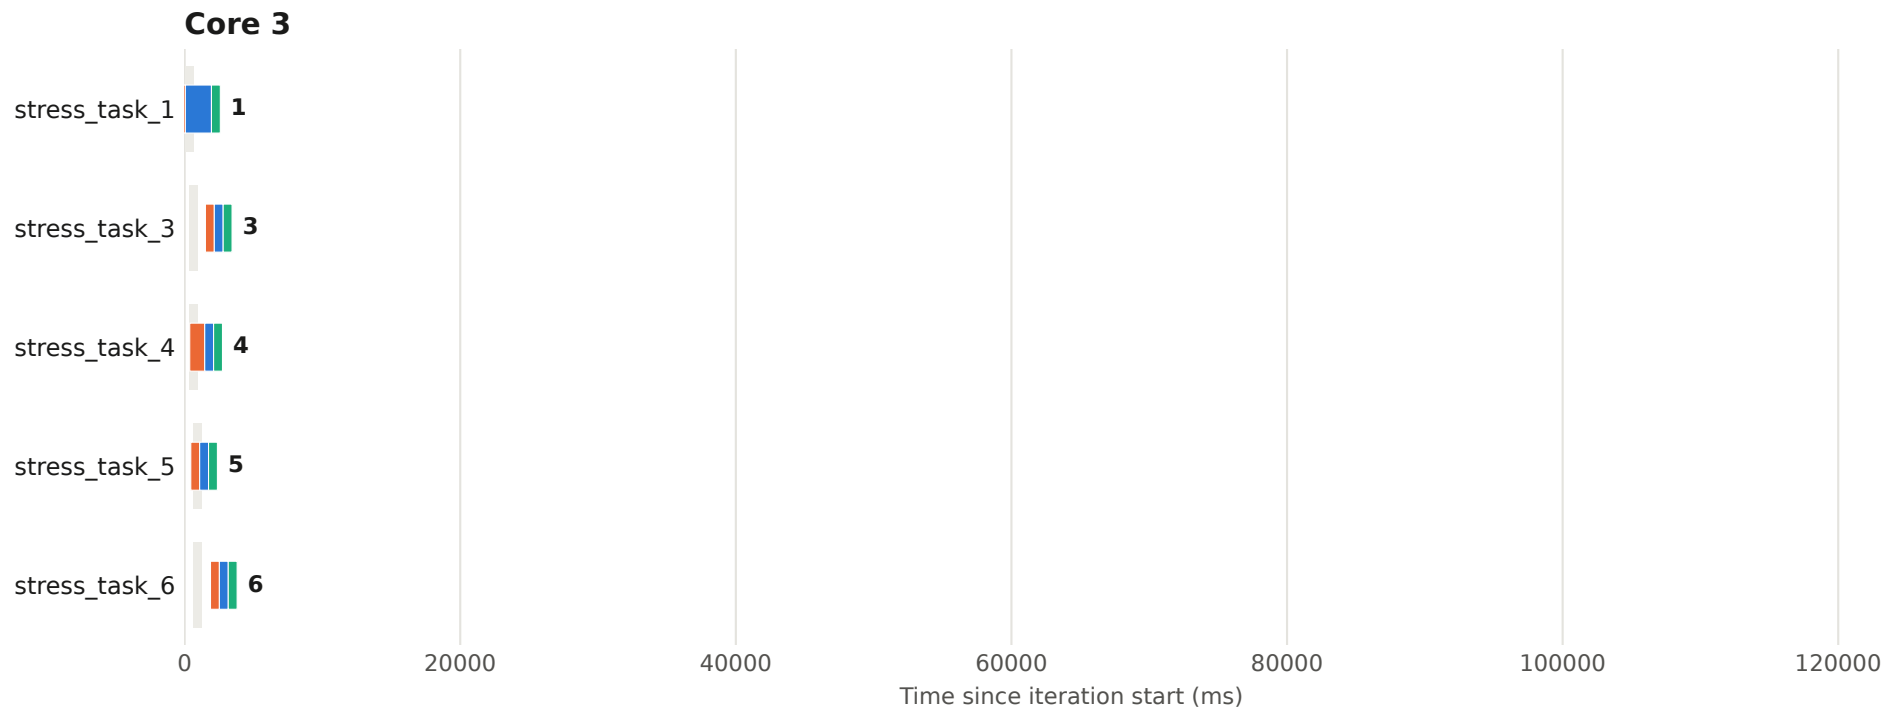


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 1 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

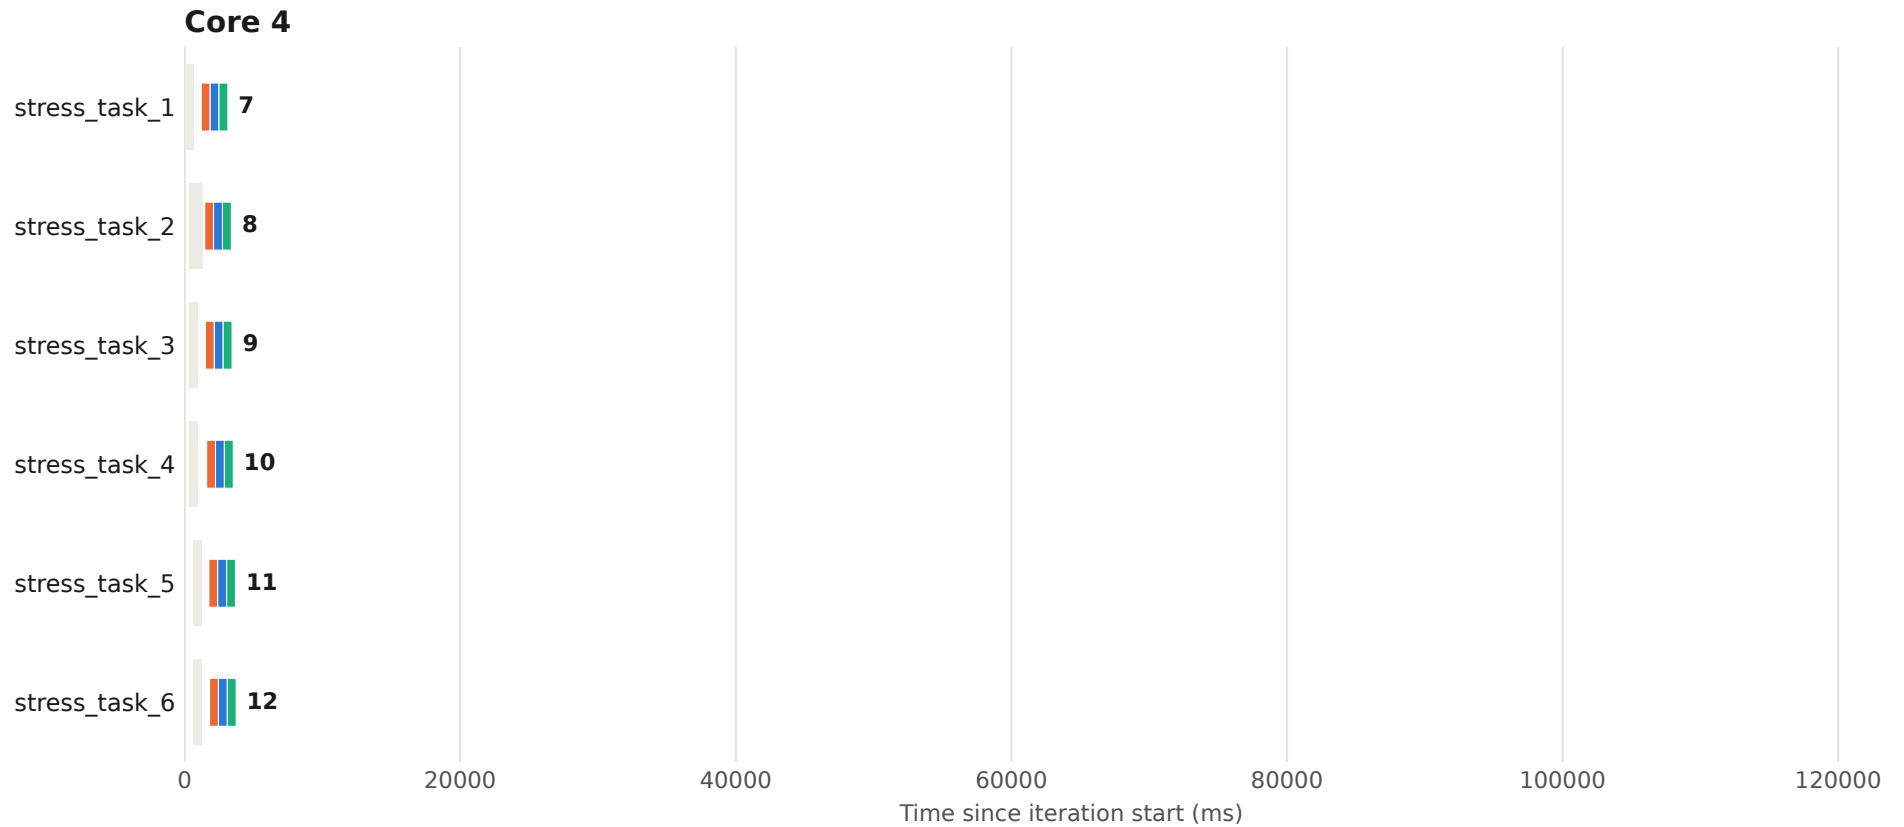


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 1 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

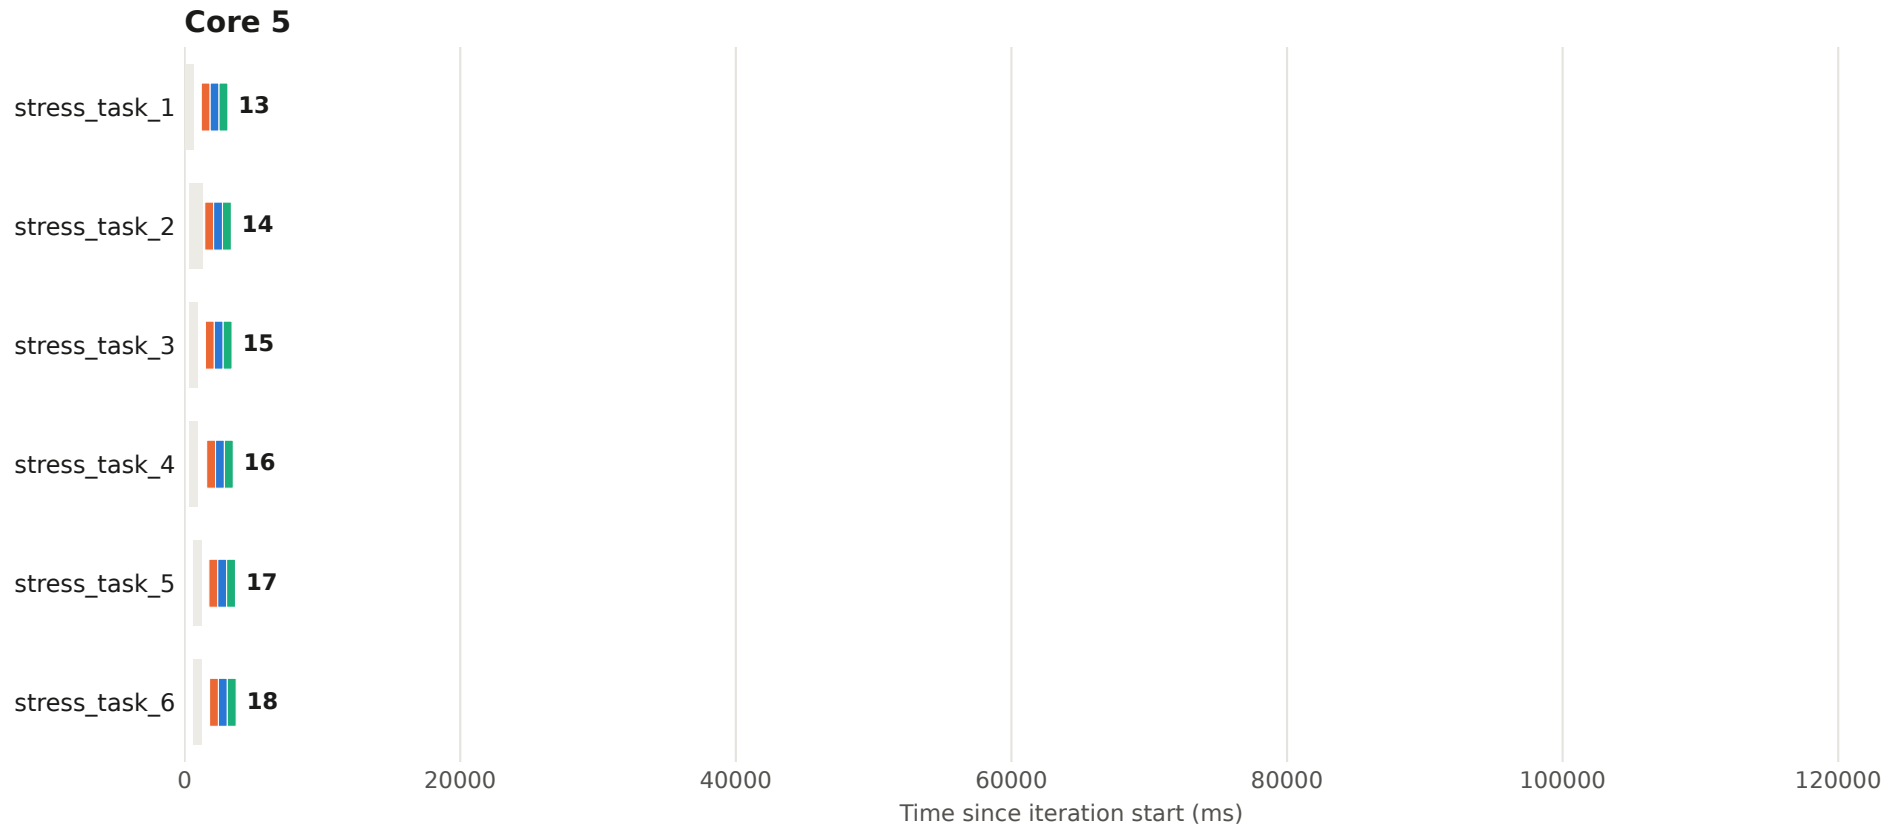


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 1 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

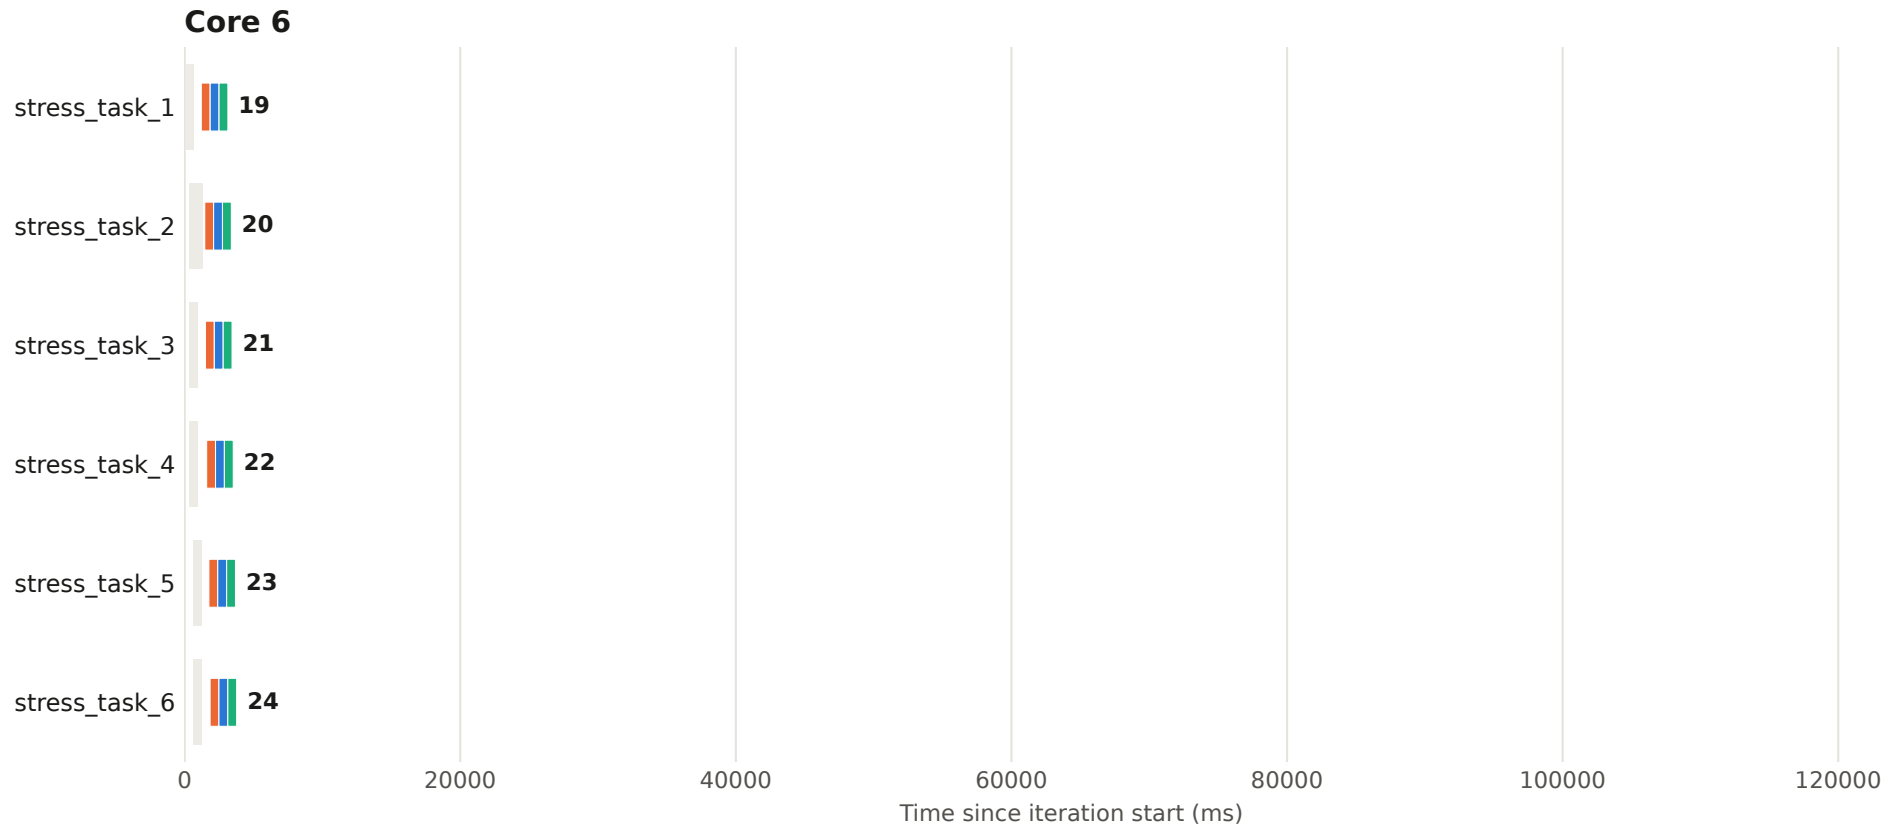


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 1 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

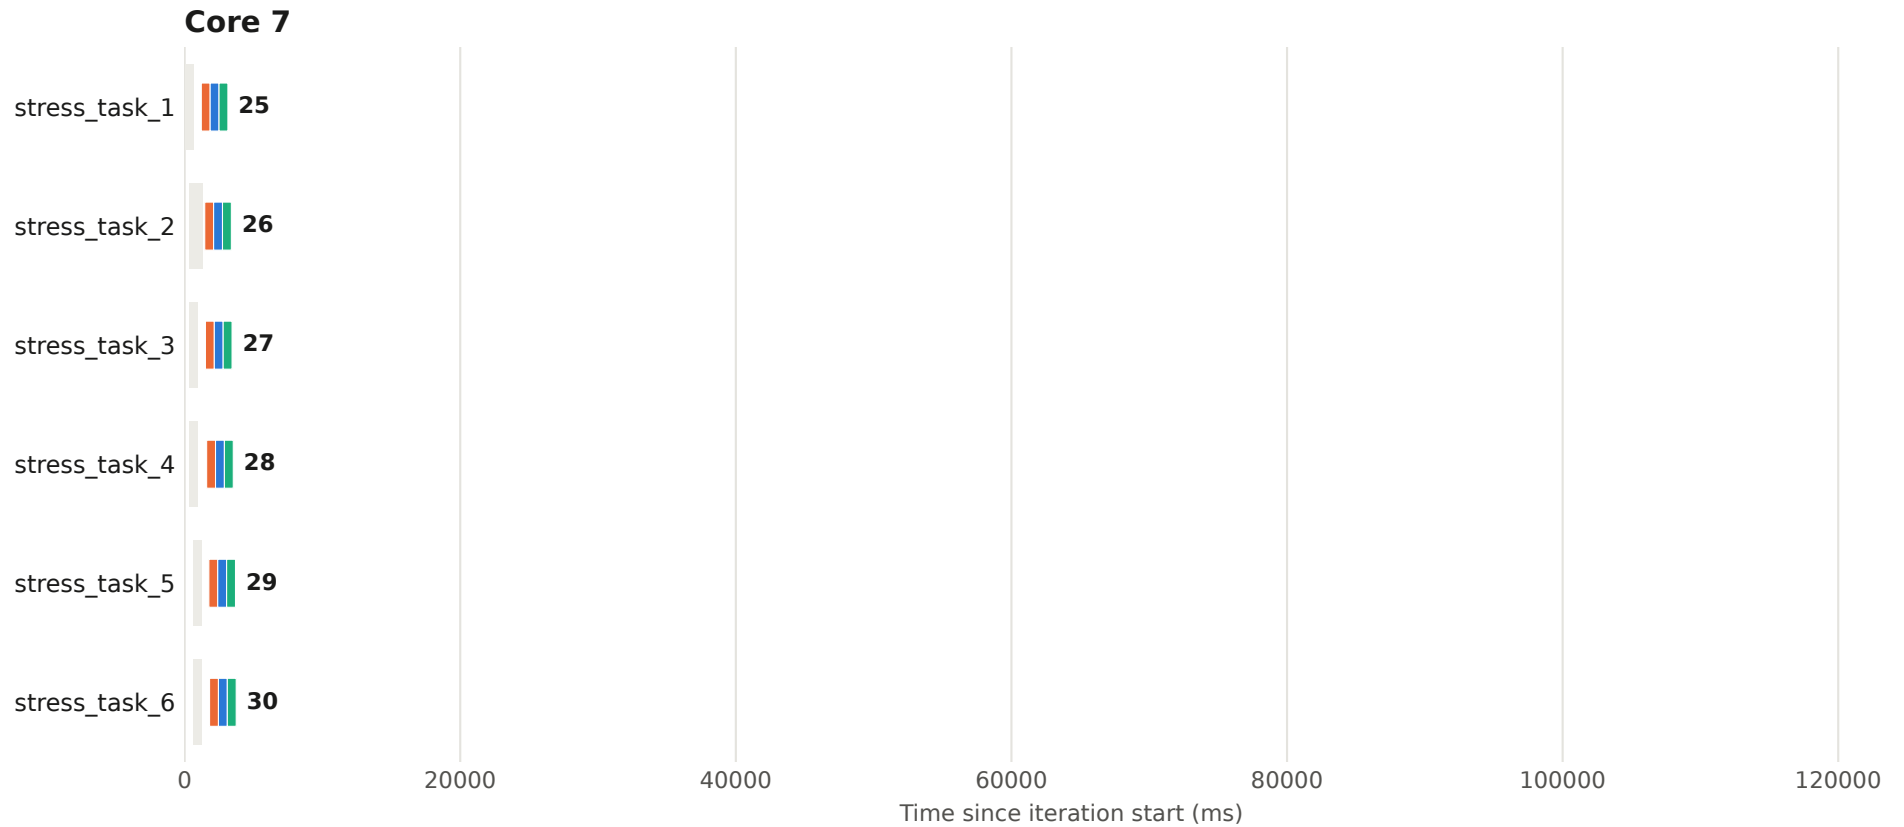


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 2 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

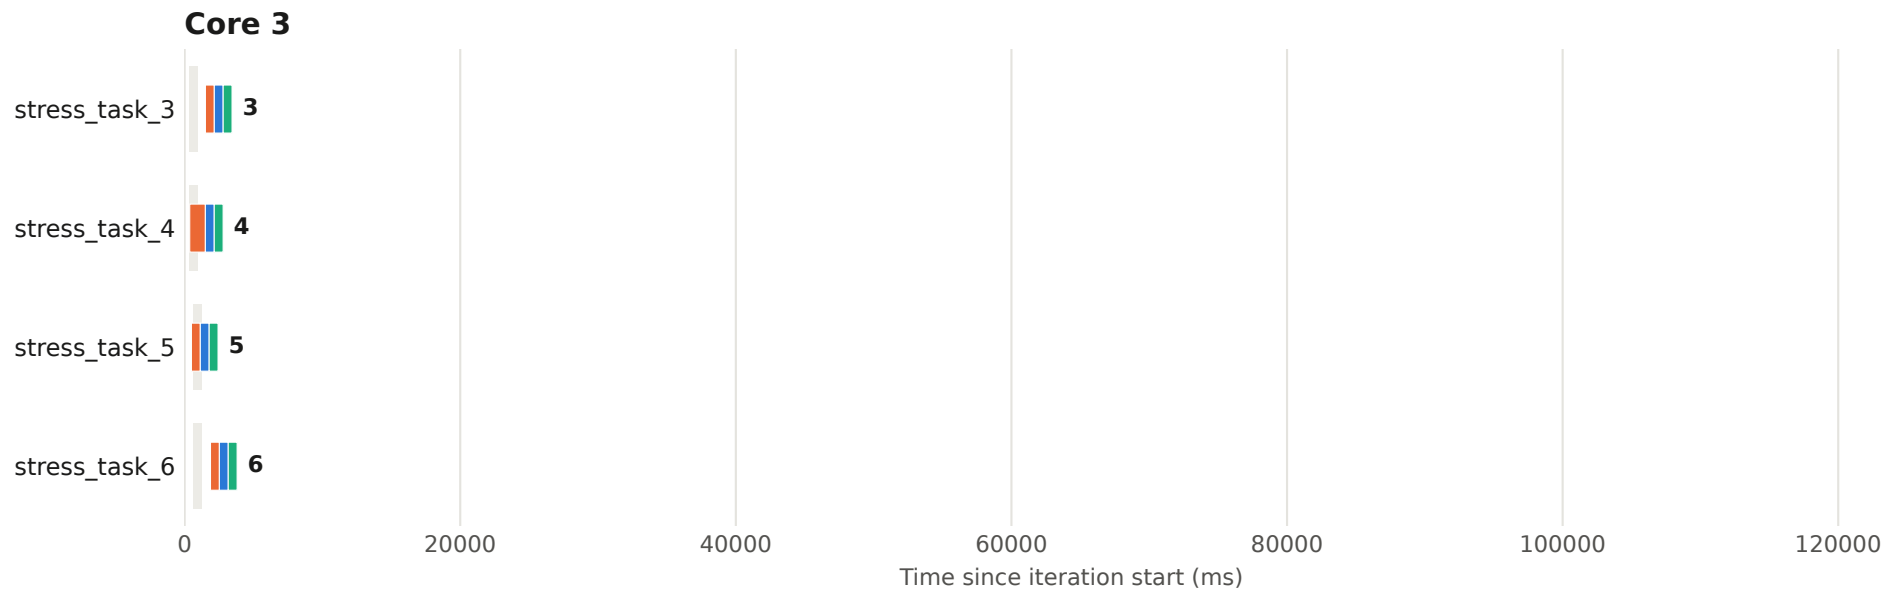


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 2 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

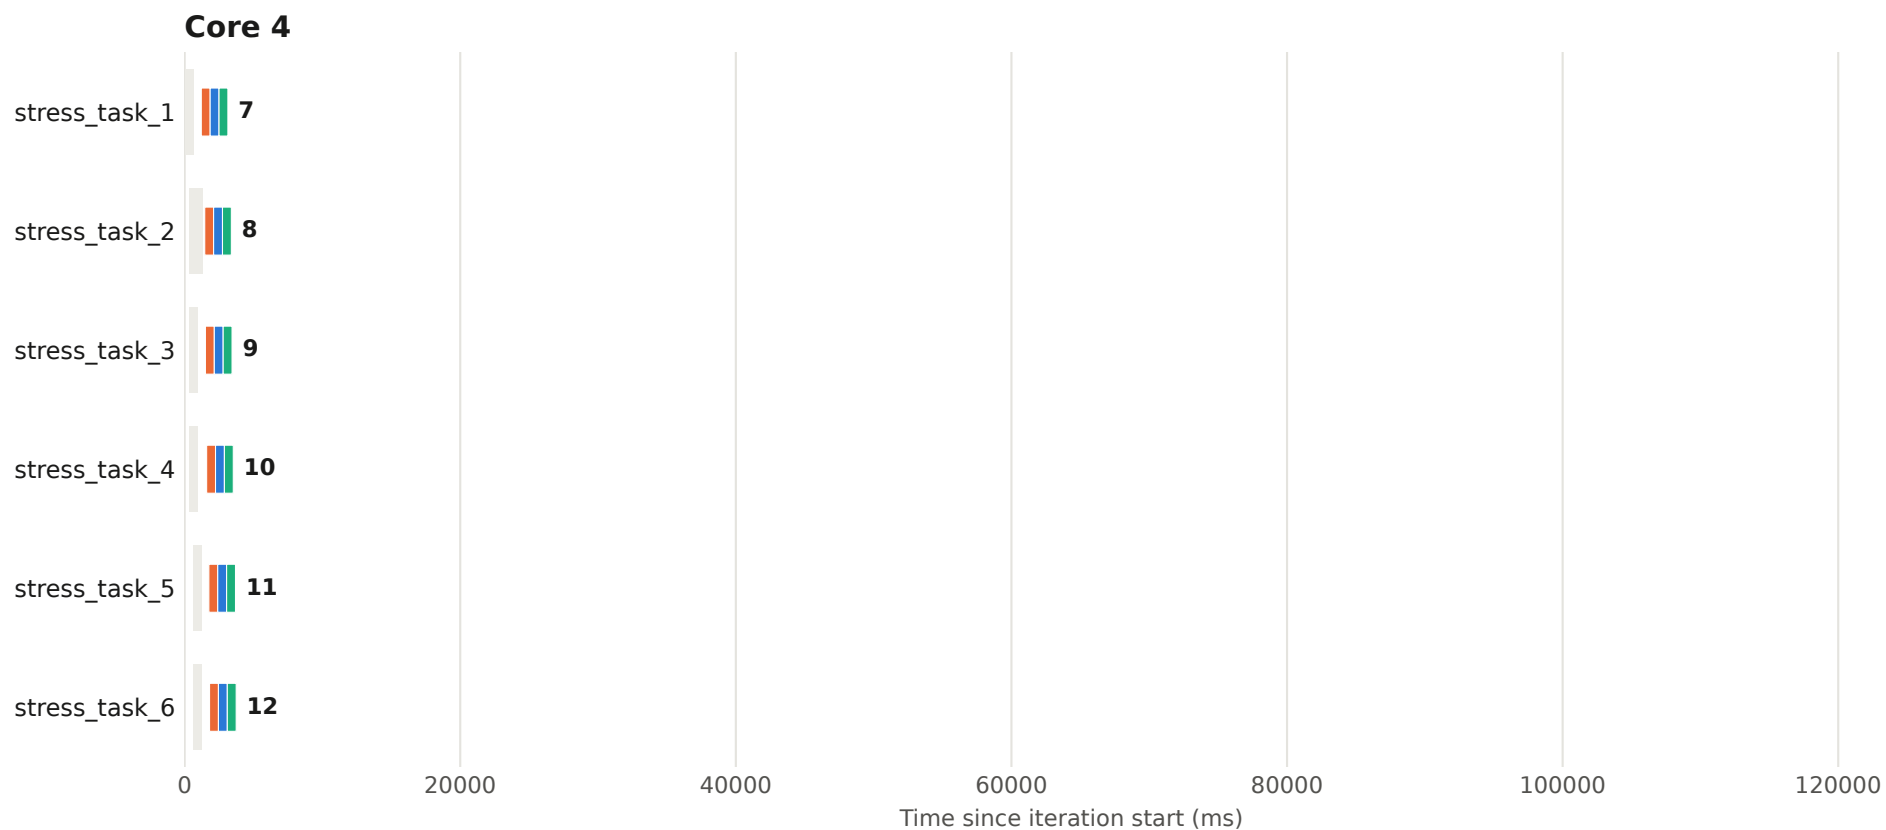


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 2 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

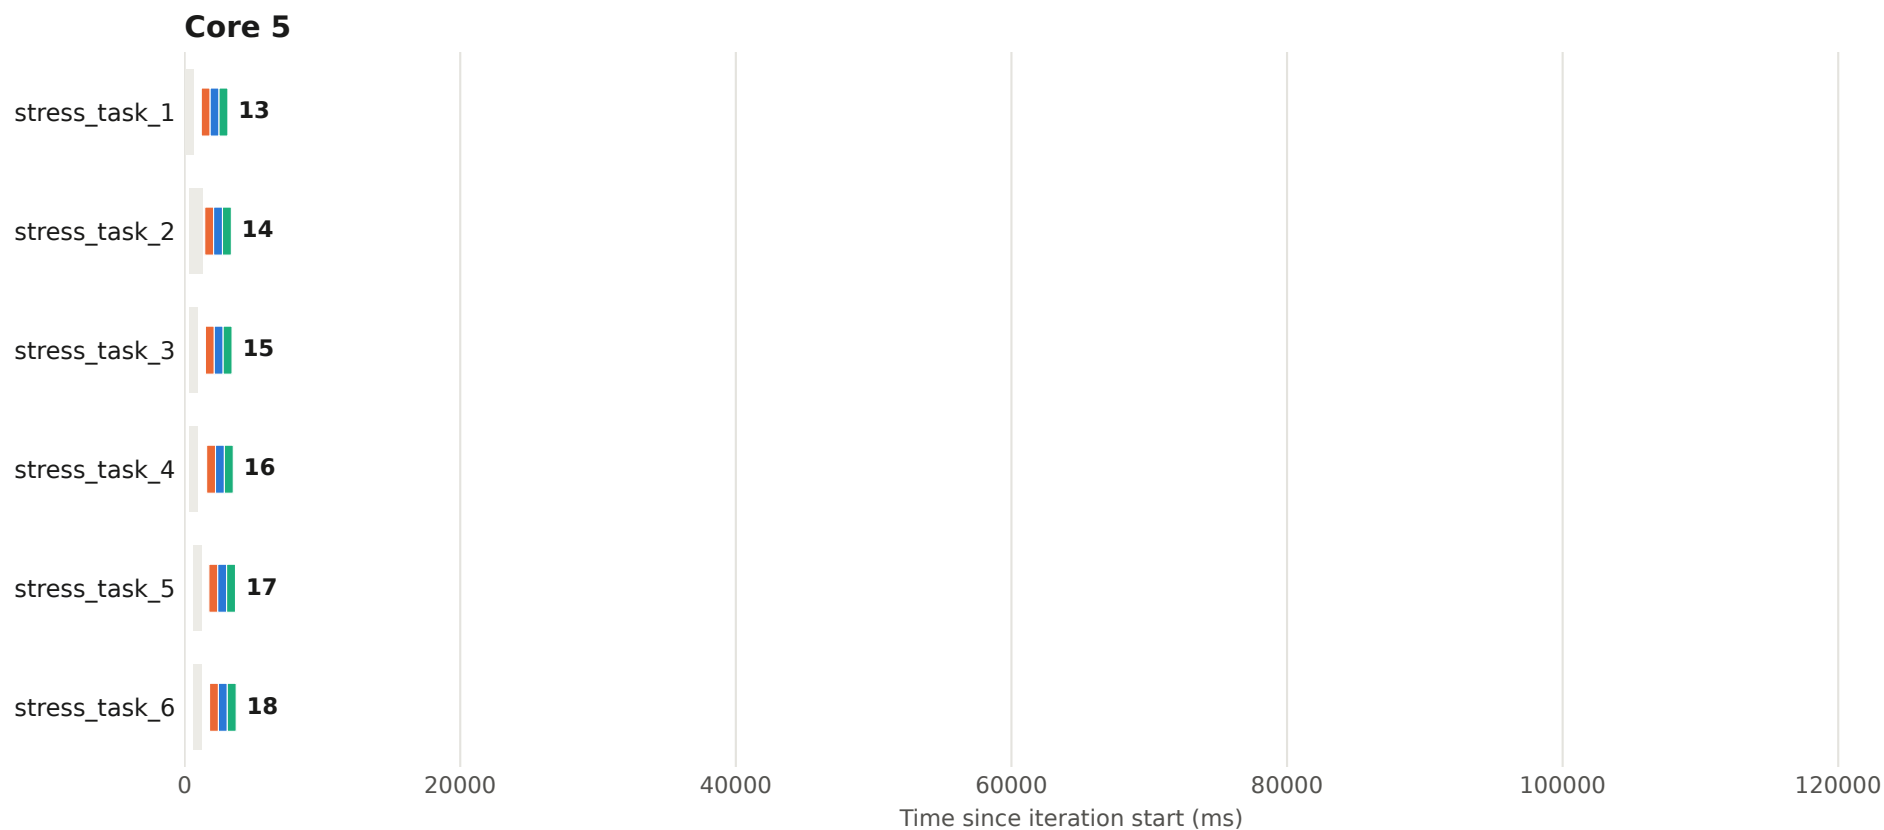


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 2 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

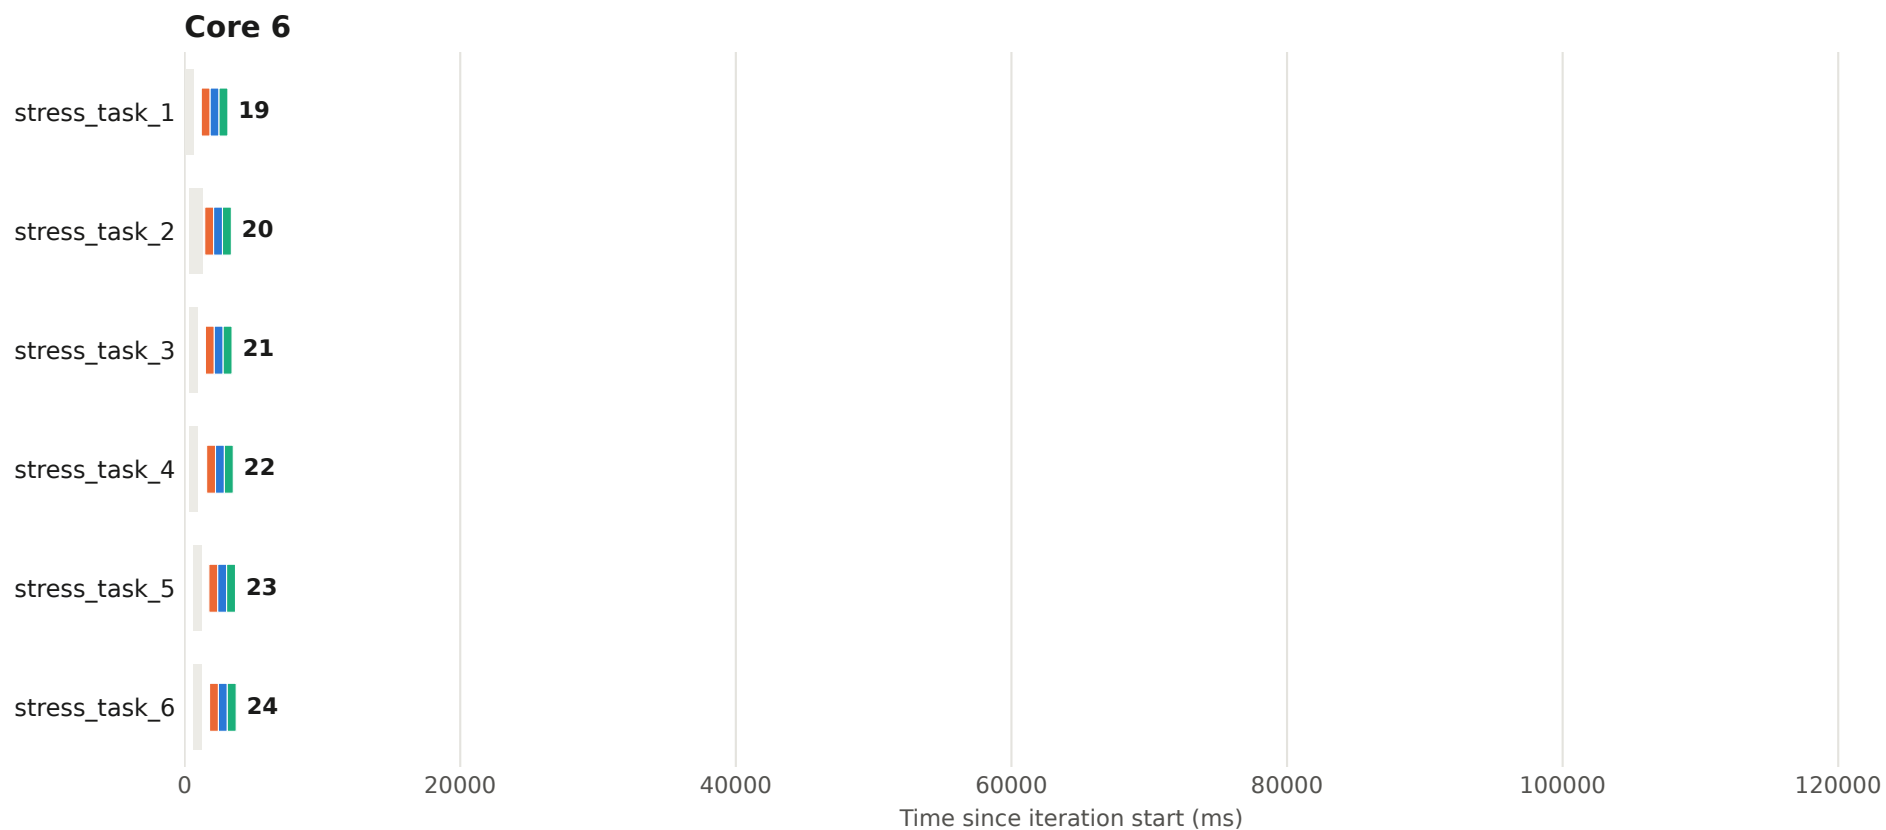


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 2 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

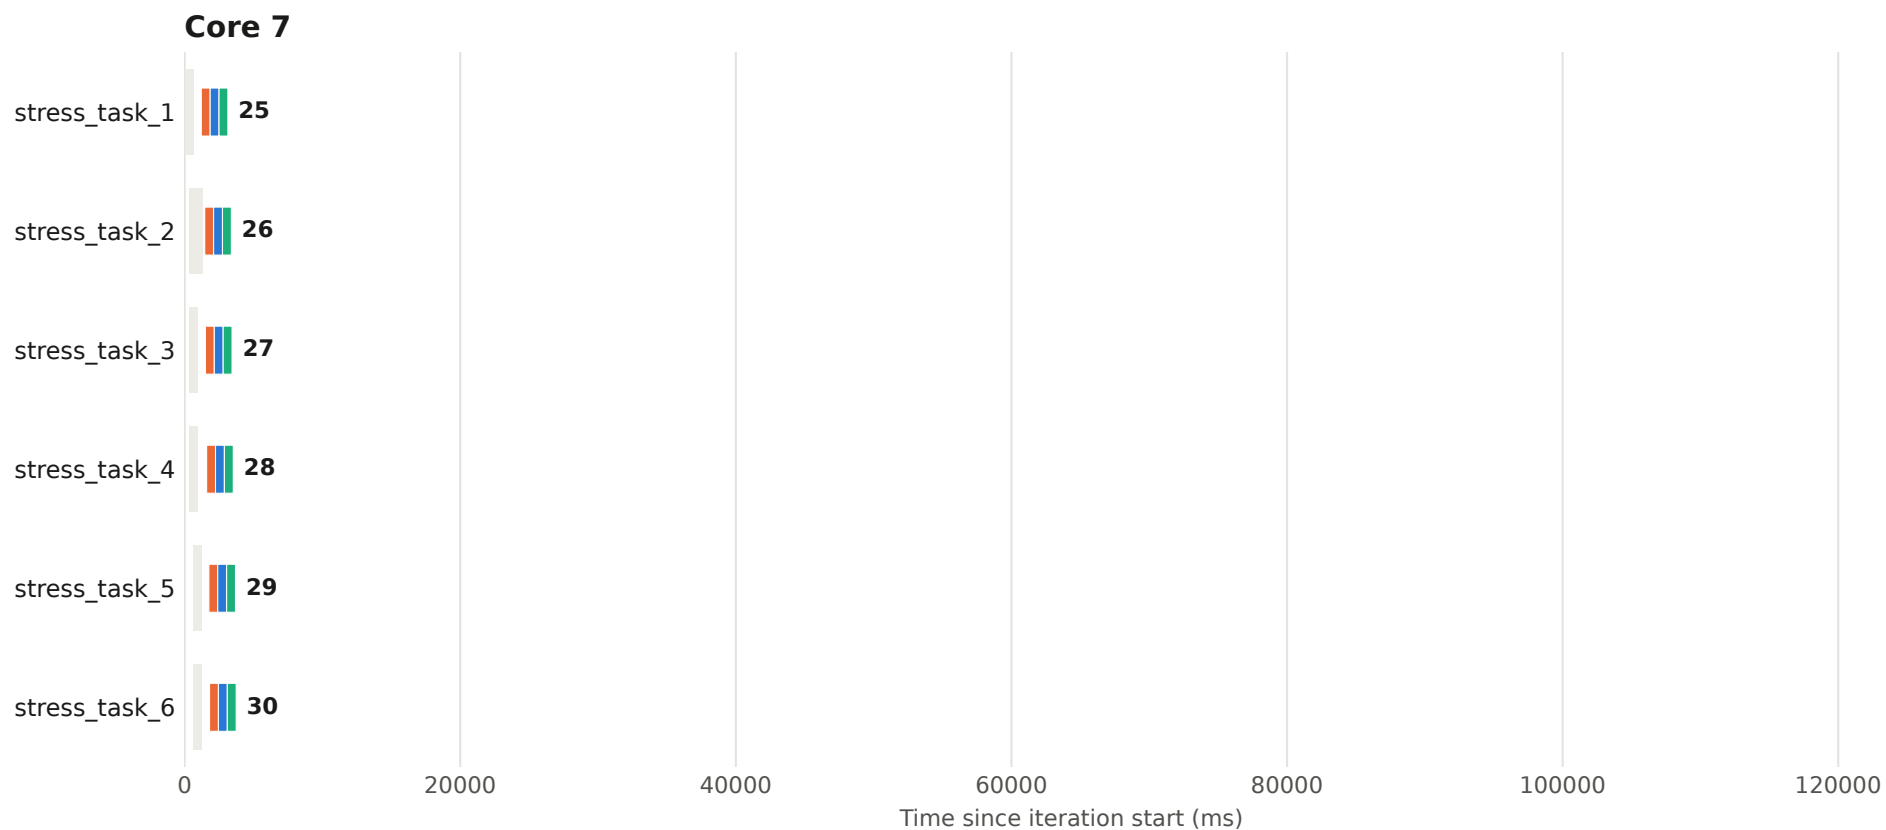


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 3 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

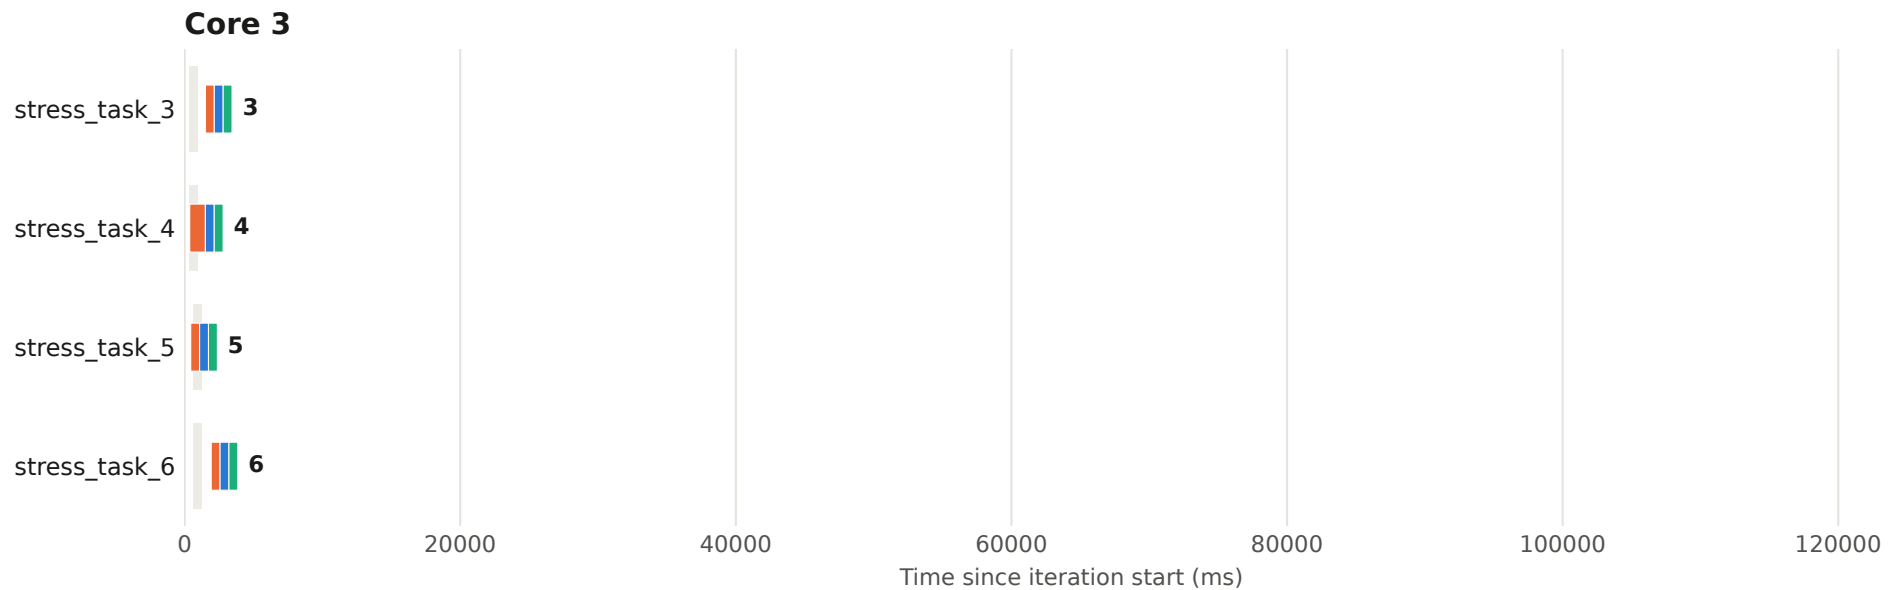


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 3 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

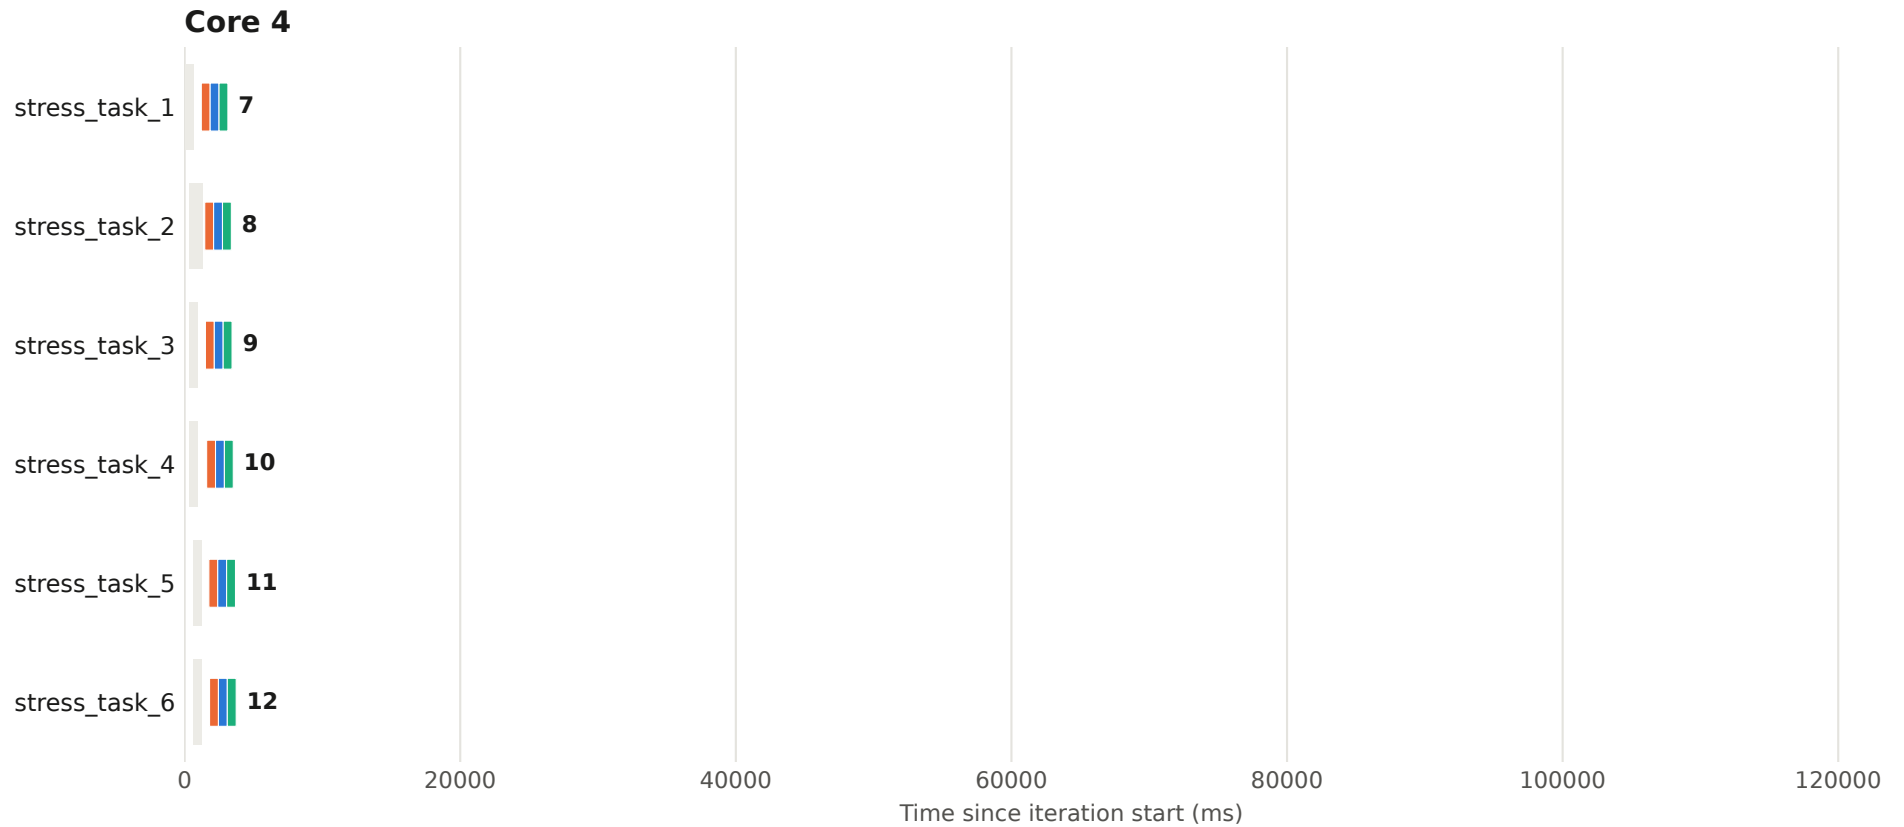


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 3 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

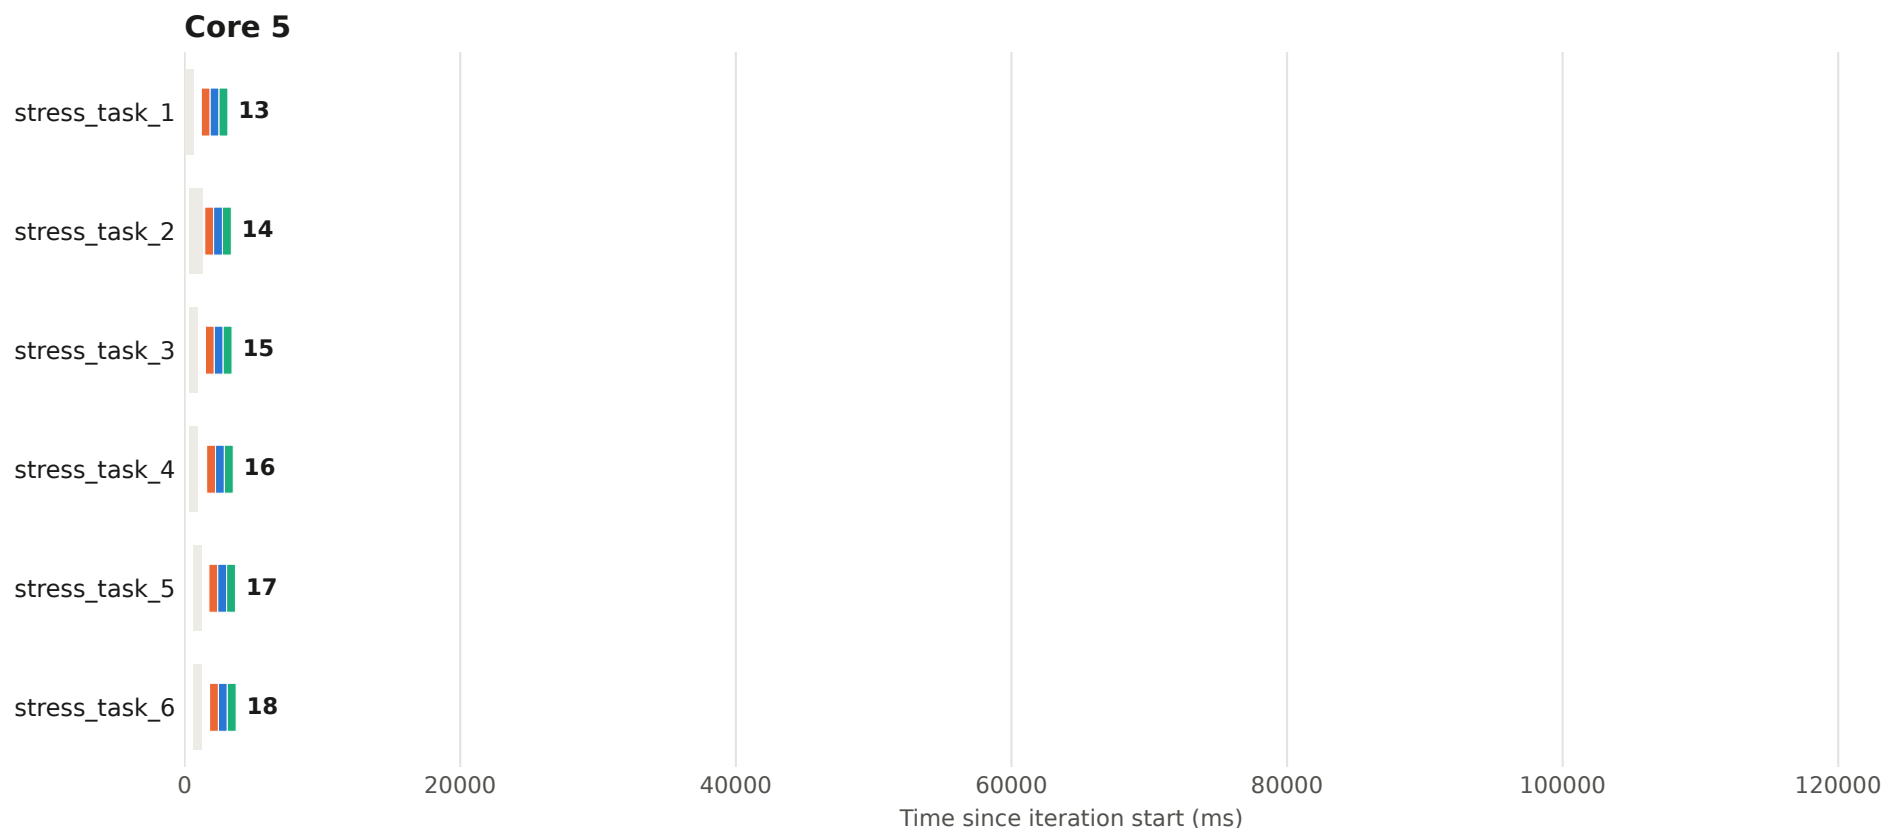


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 3 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

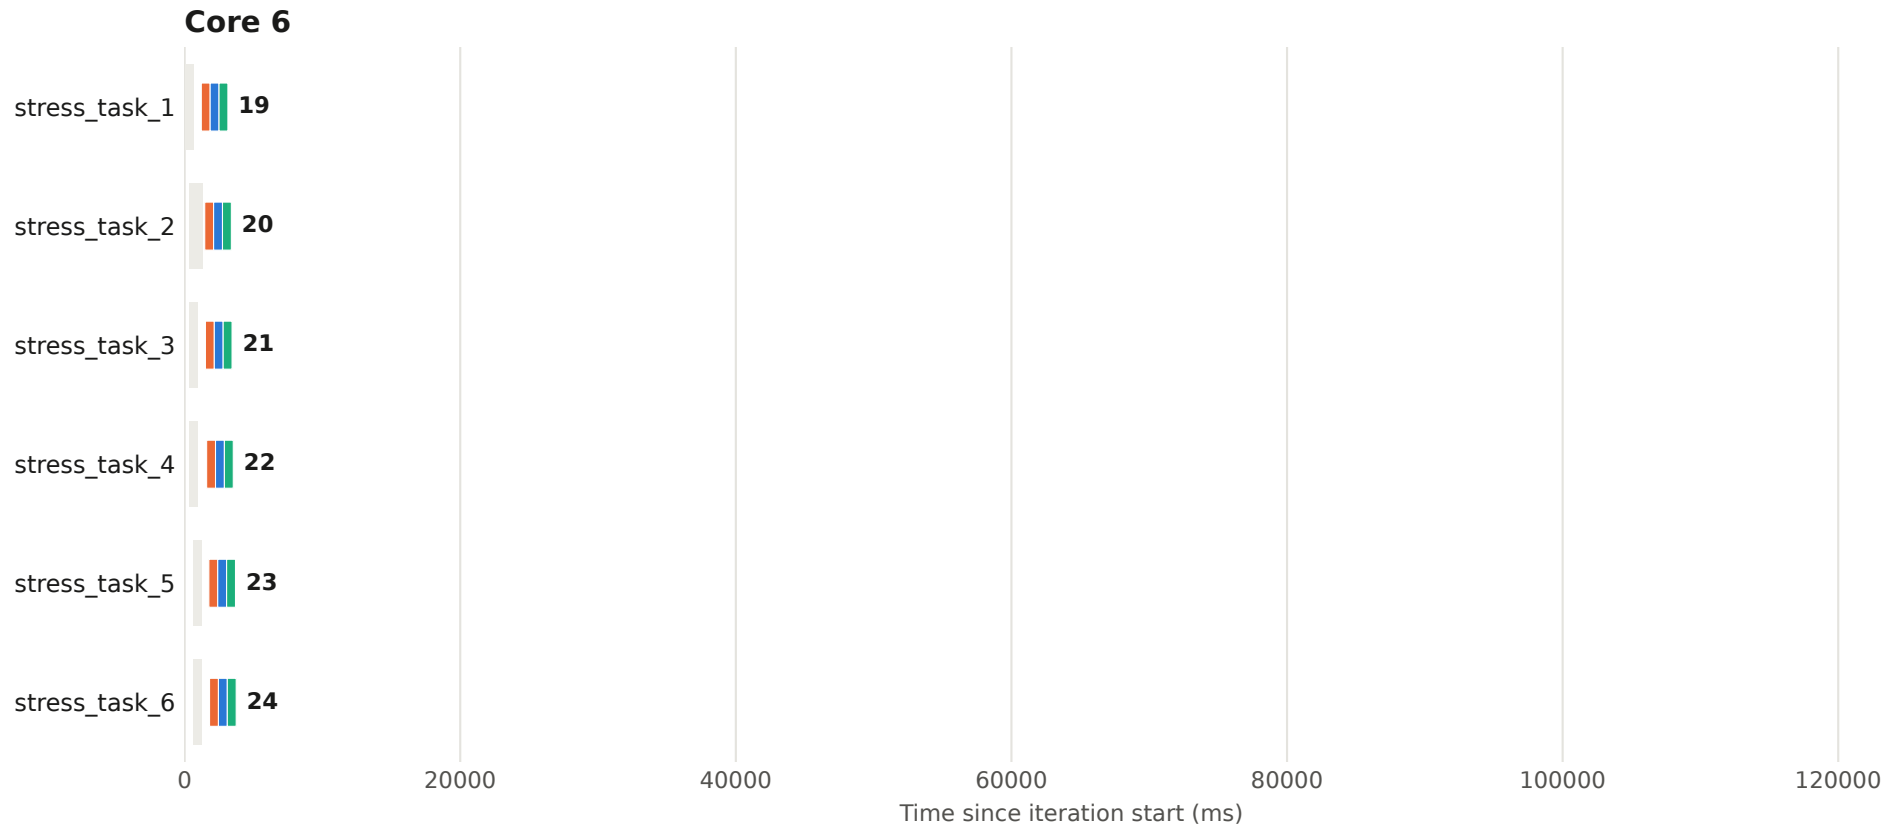


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 3 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

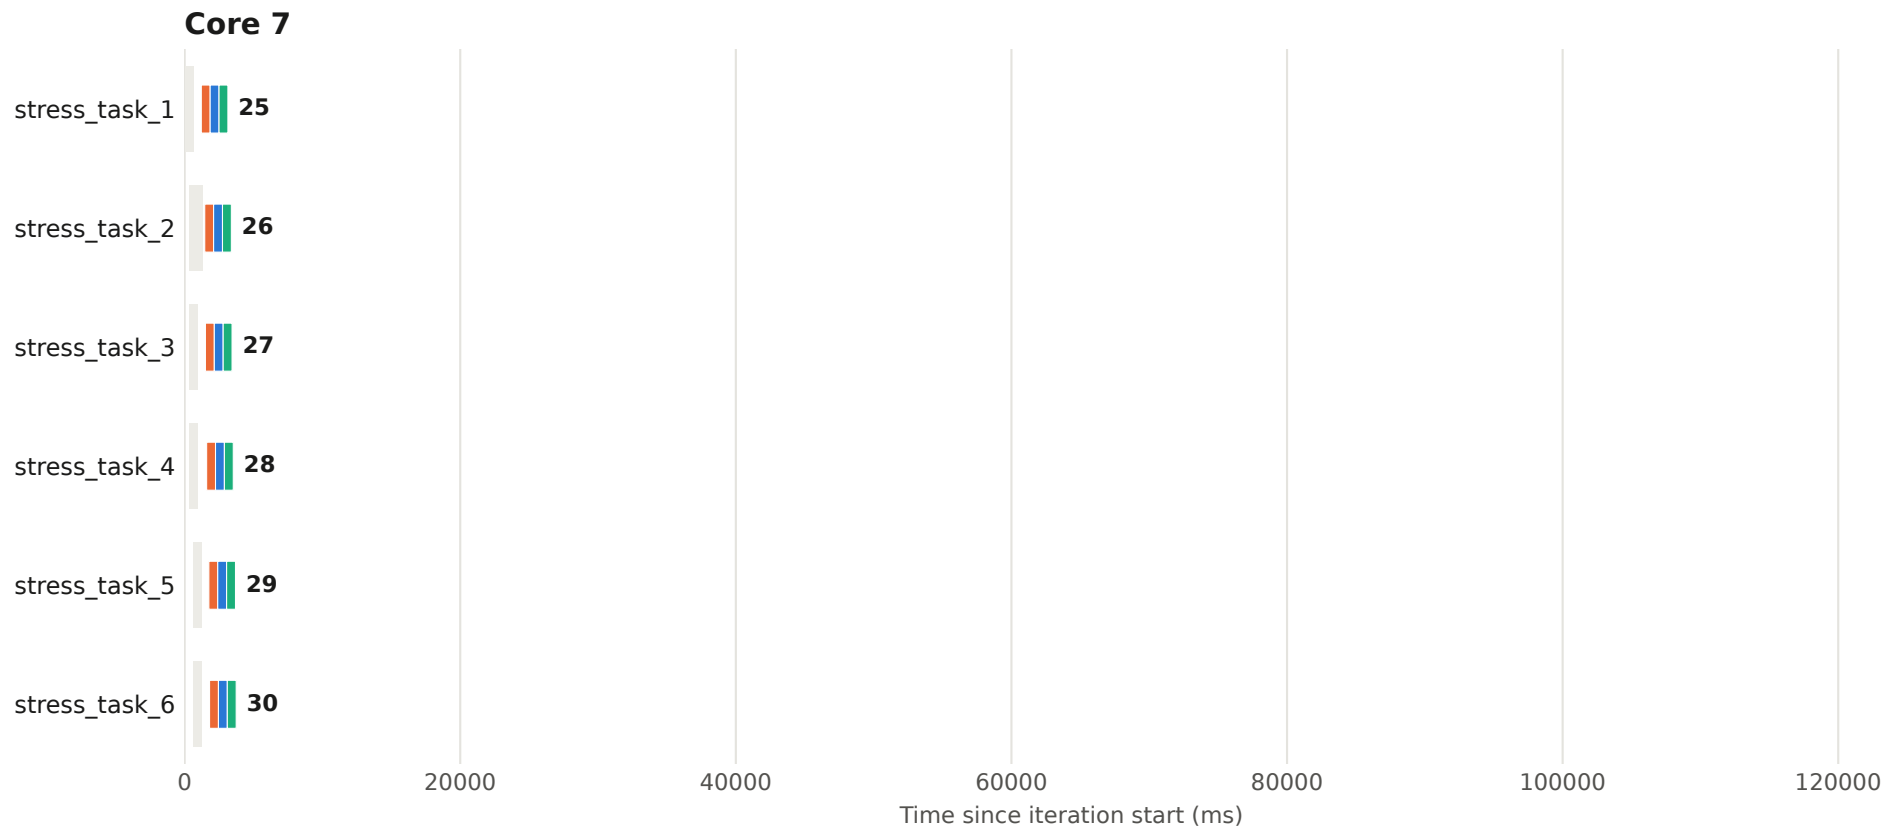


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 4 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

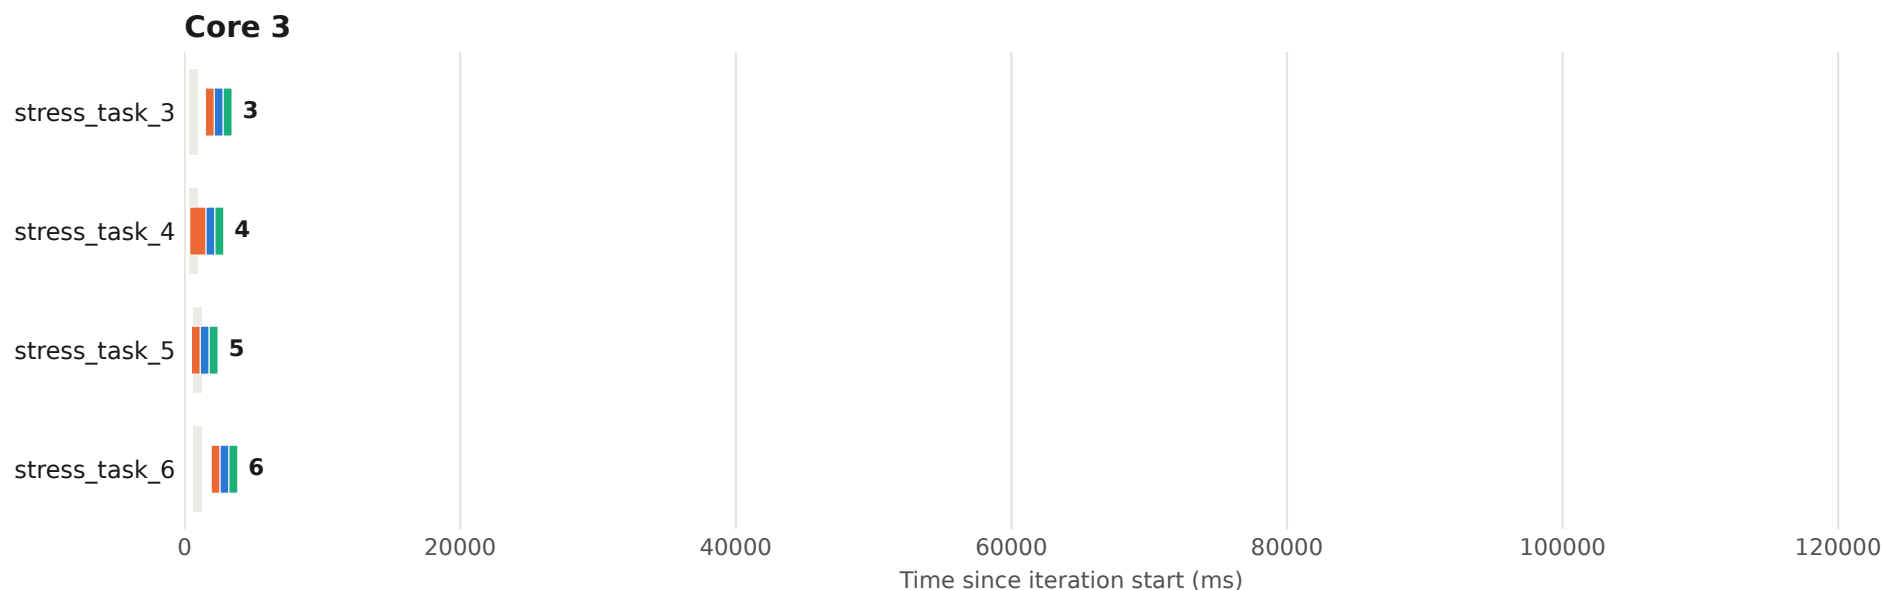

Execution plan - iteration 4 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

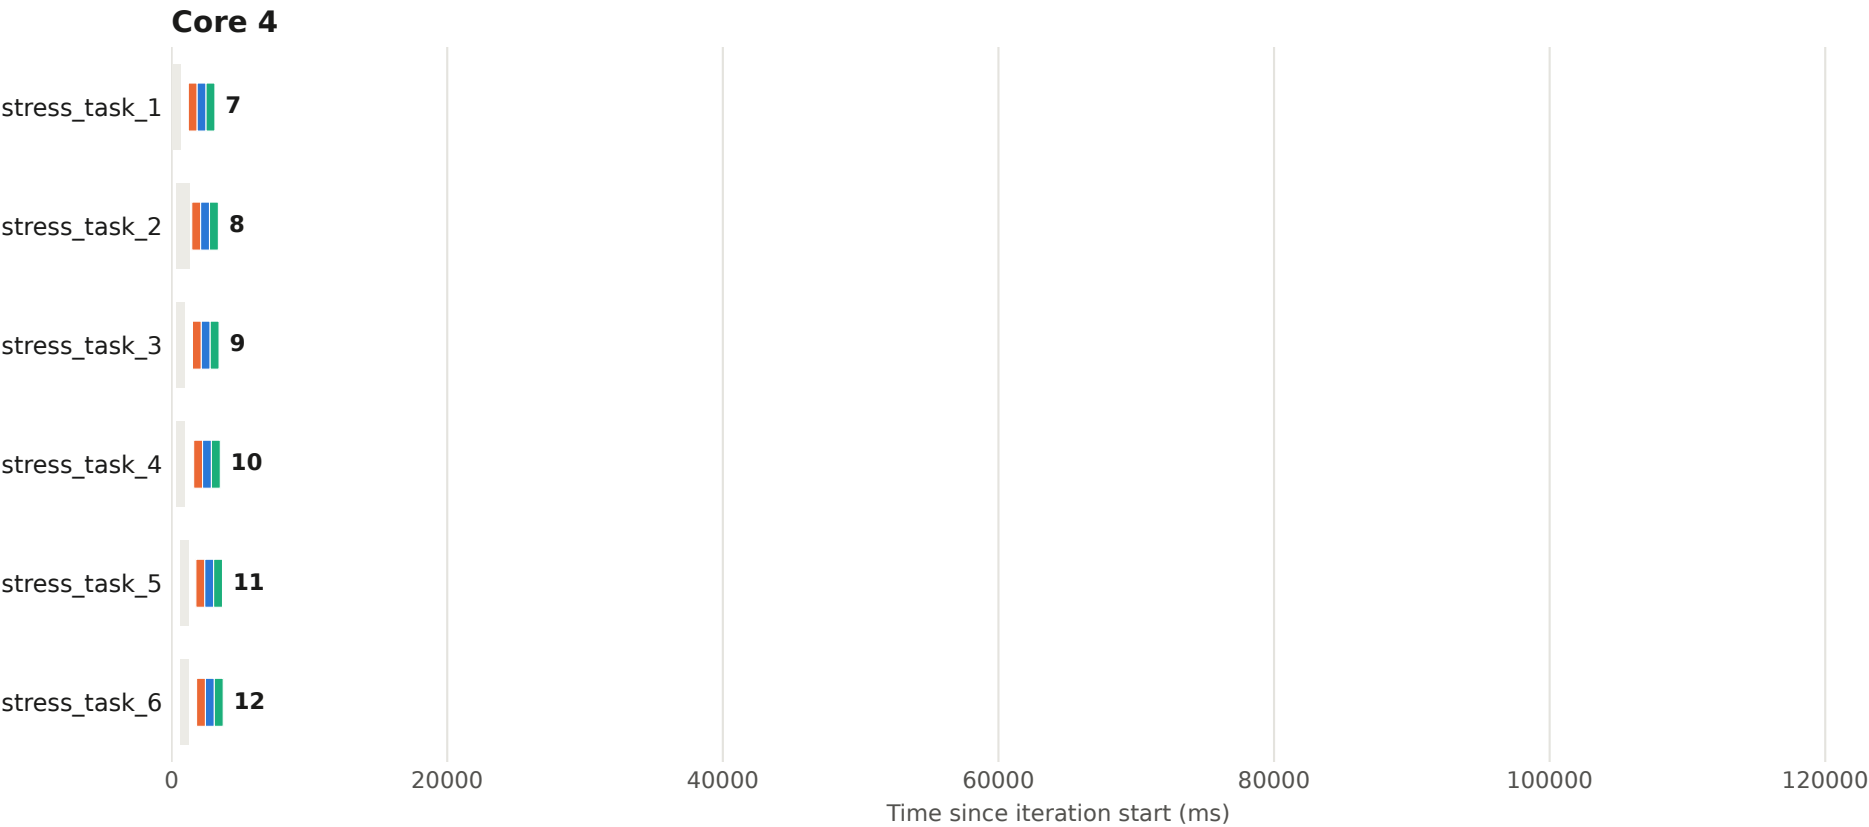


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 4 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

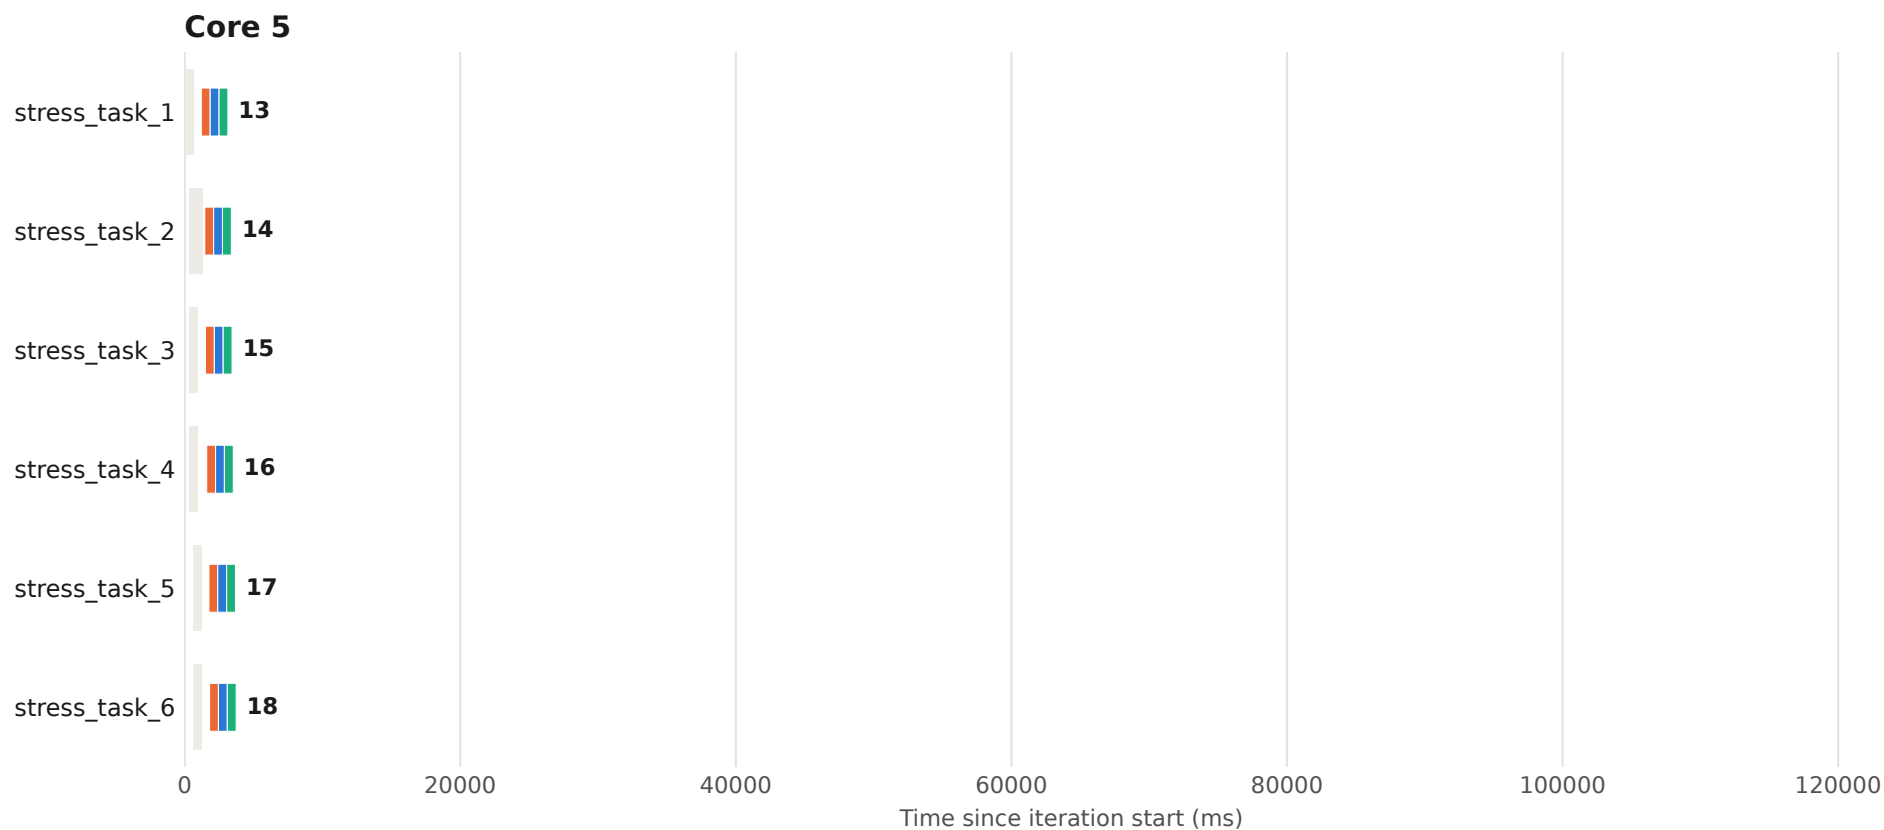


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 4 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

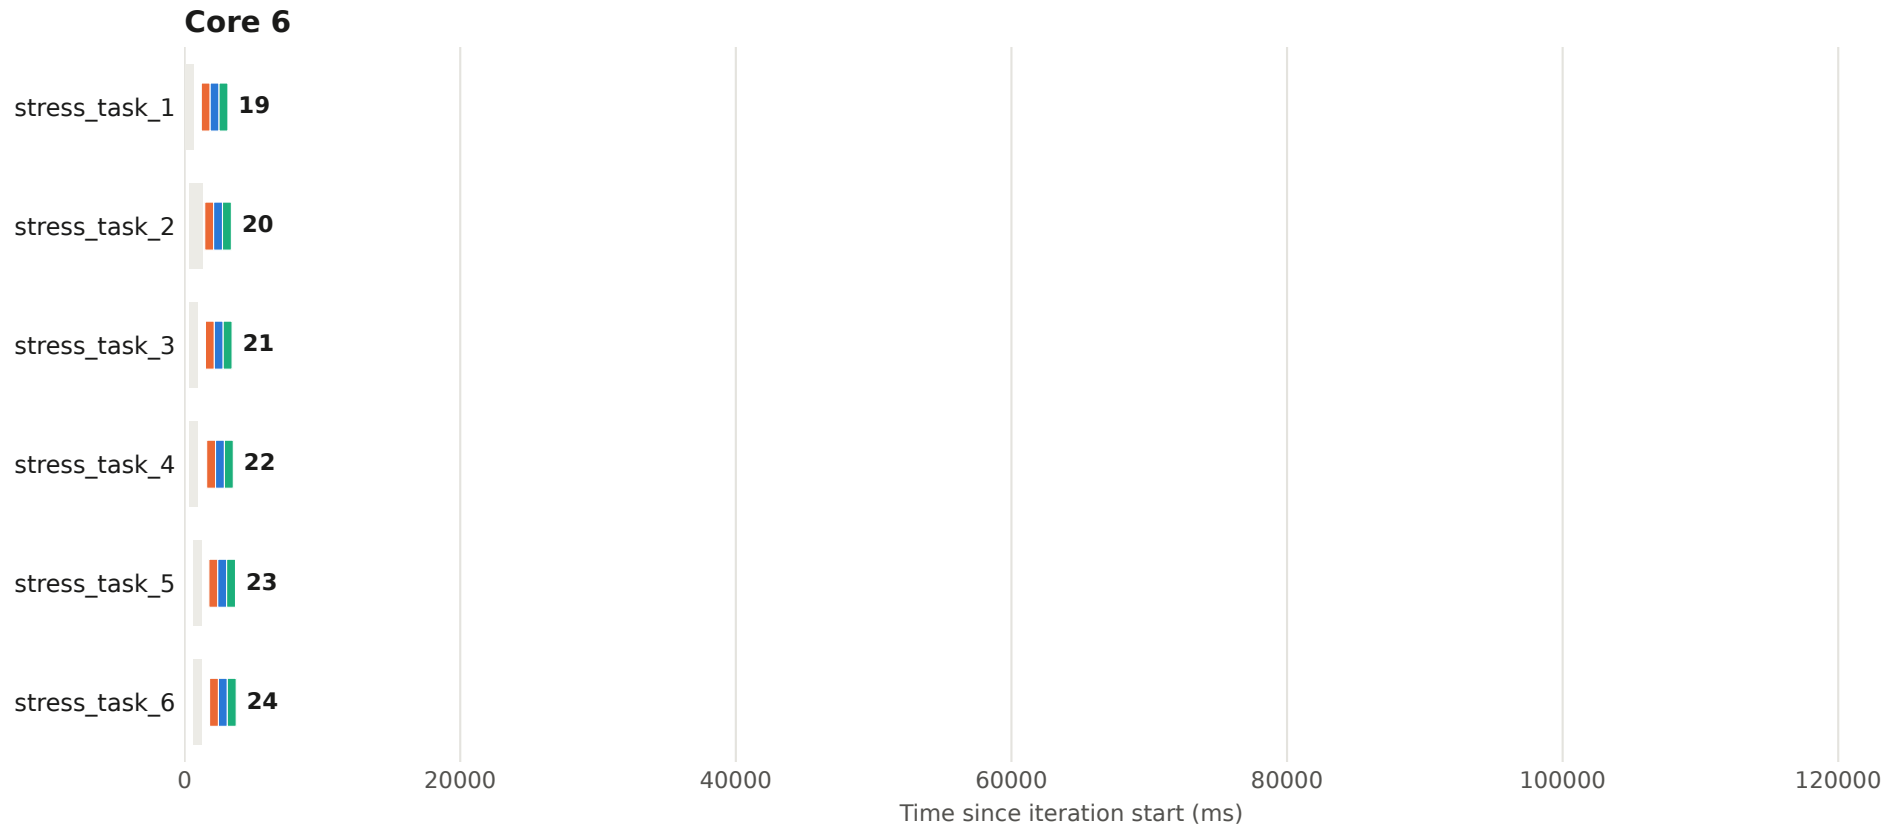


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 4 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

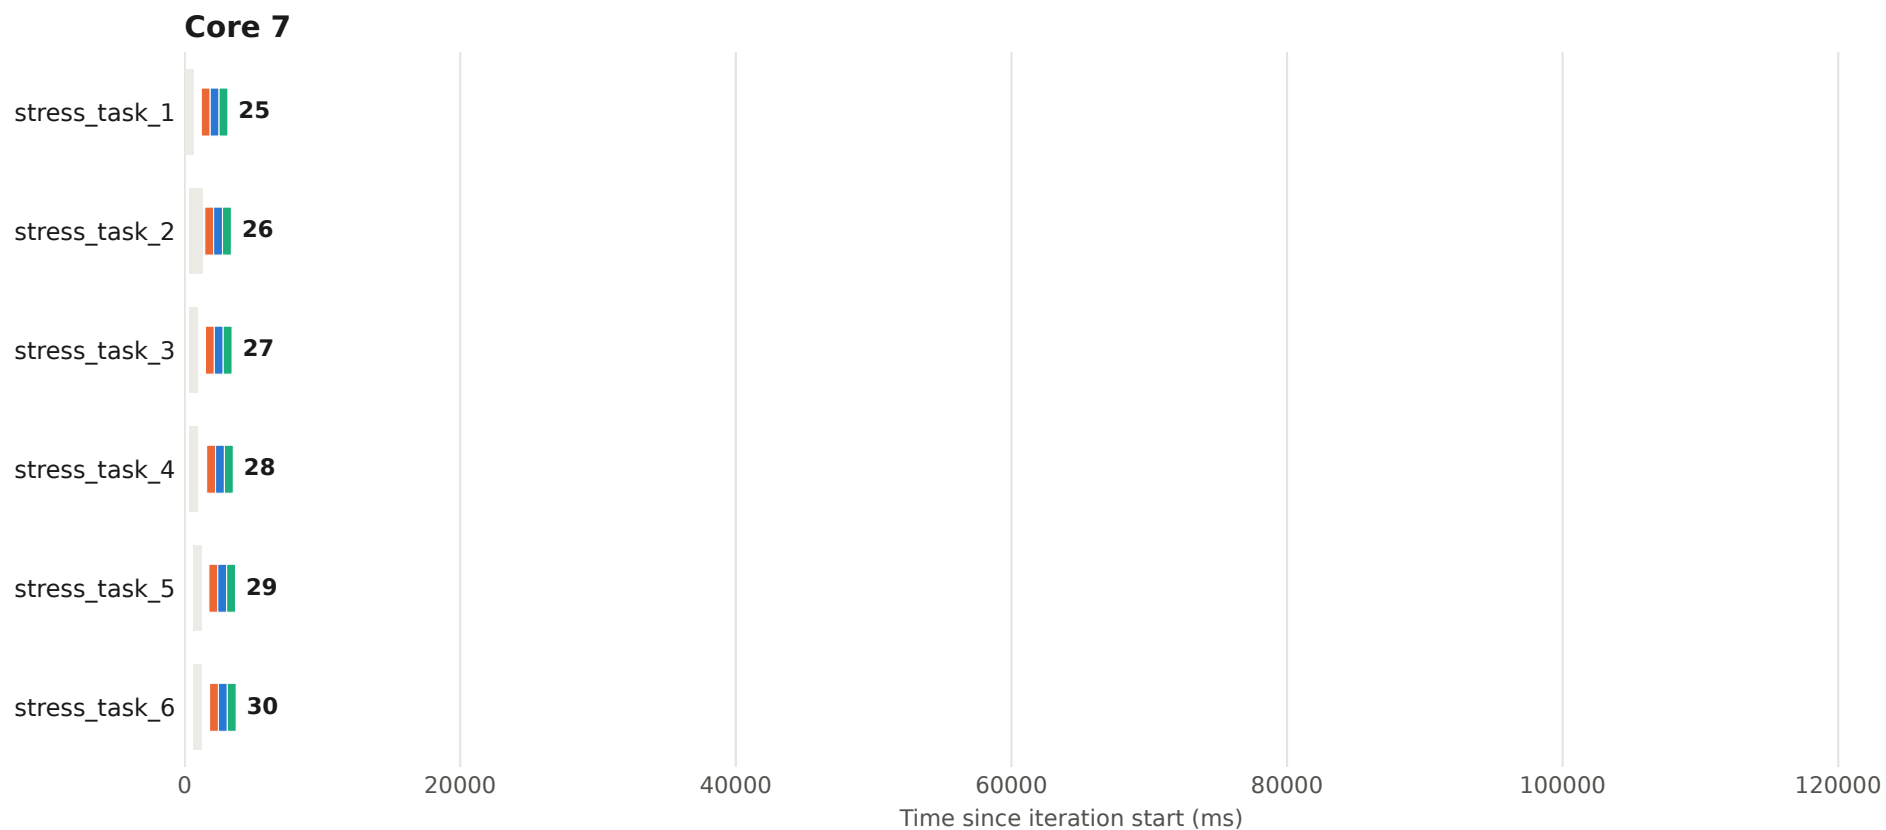


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 5 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

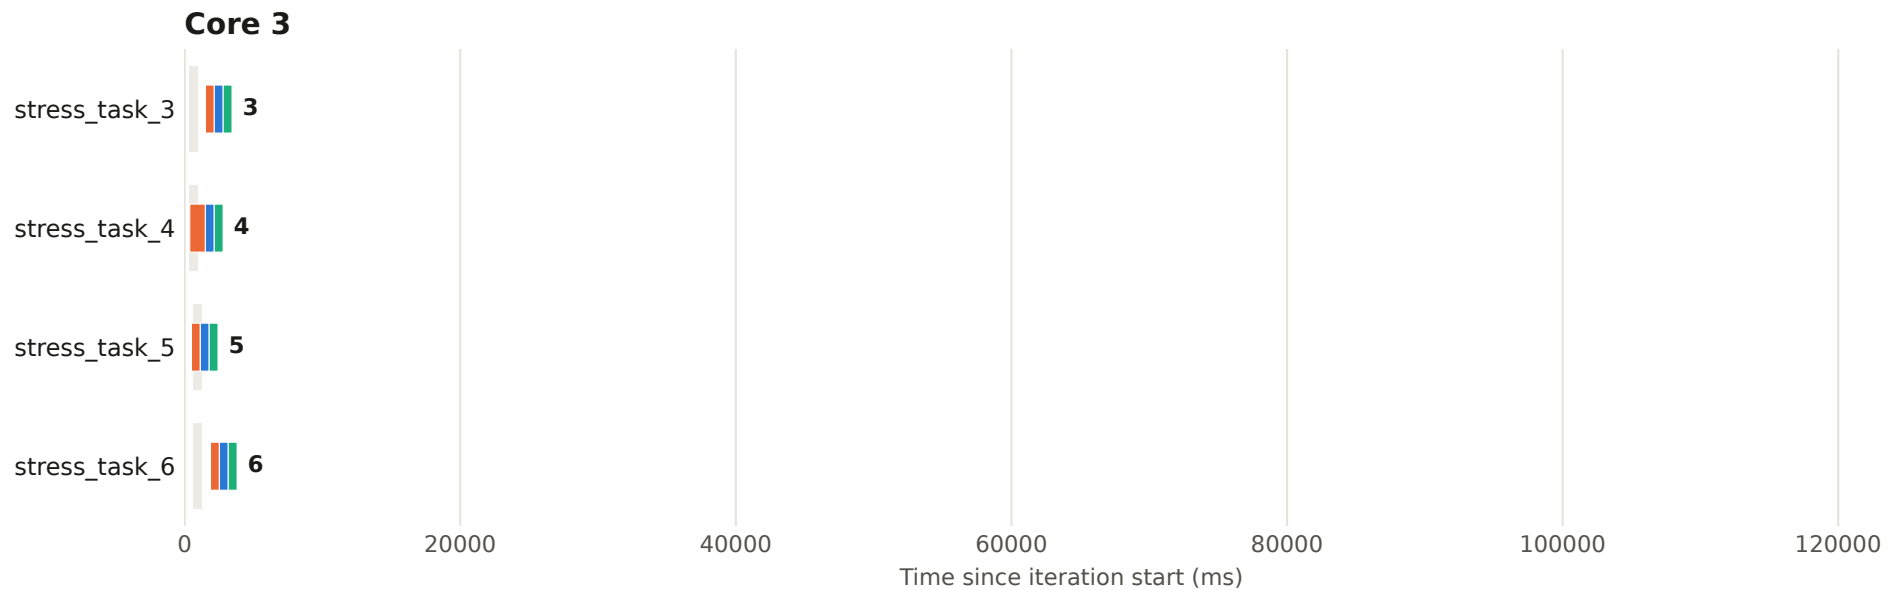


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 5 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

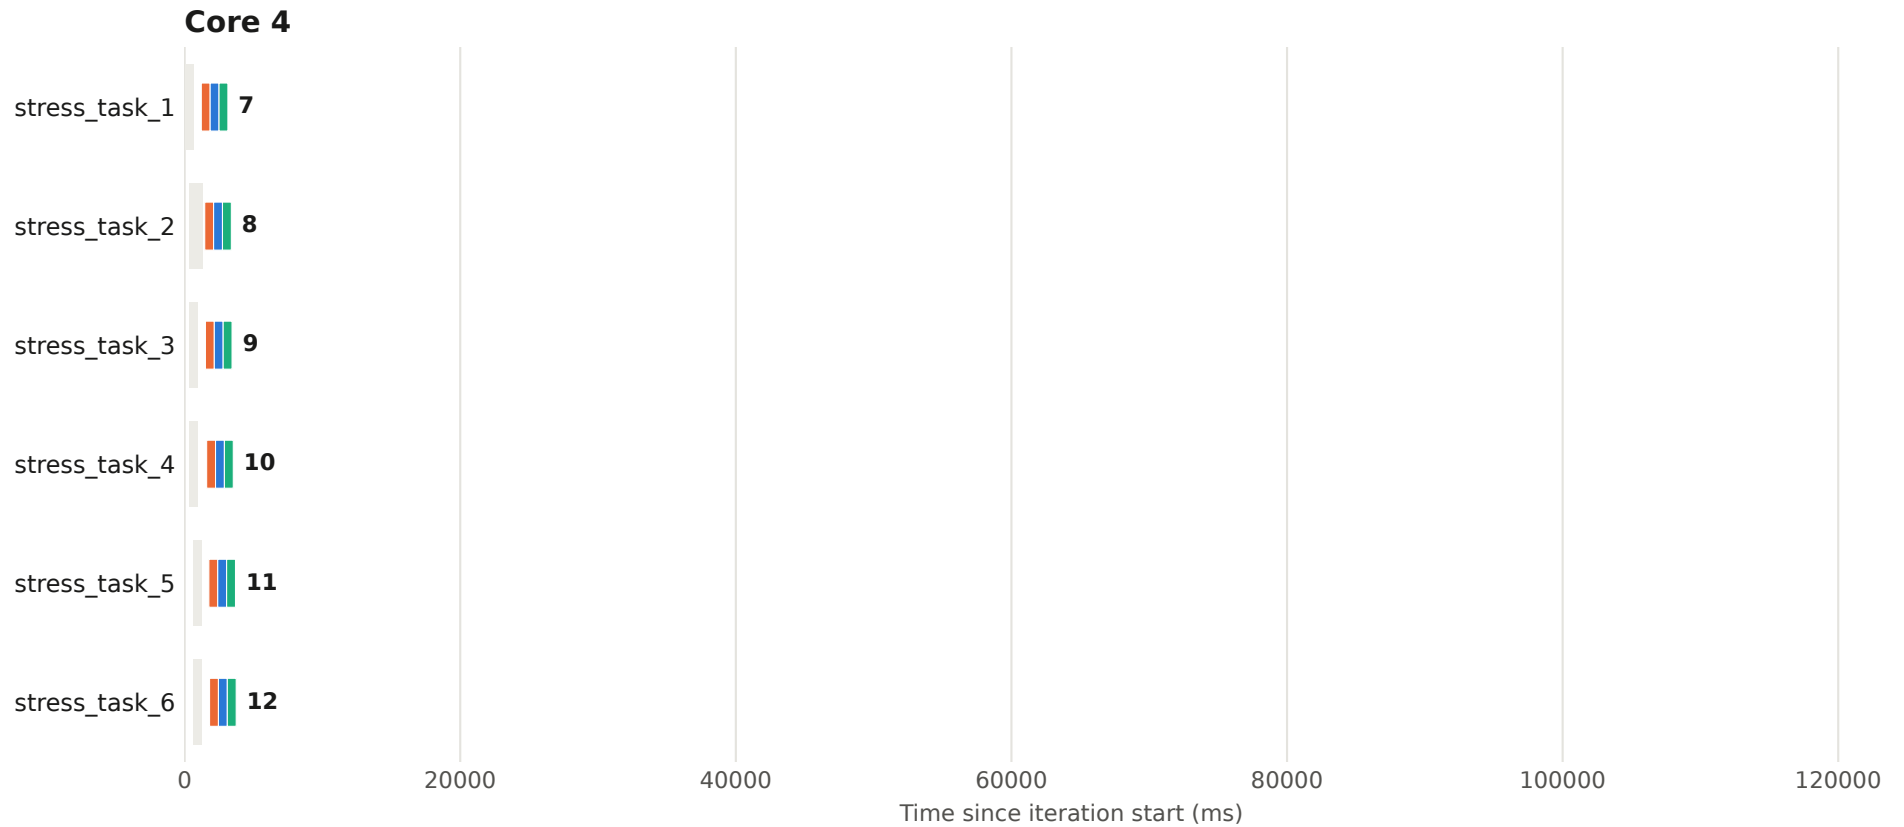


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 5 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

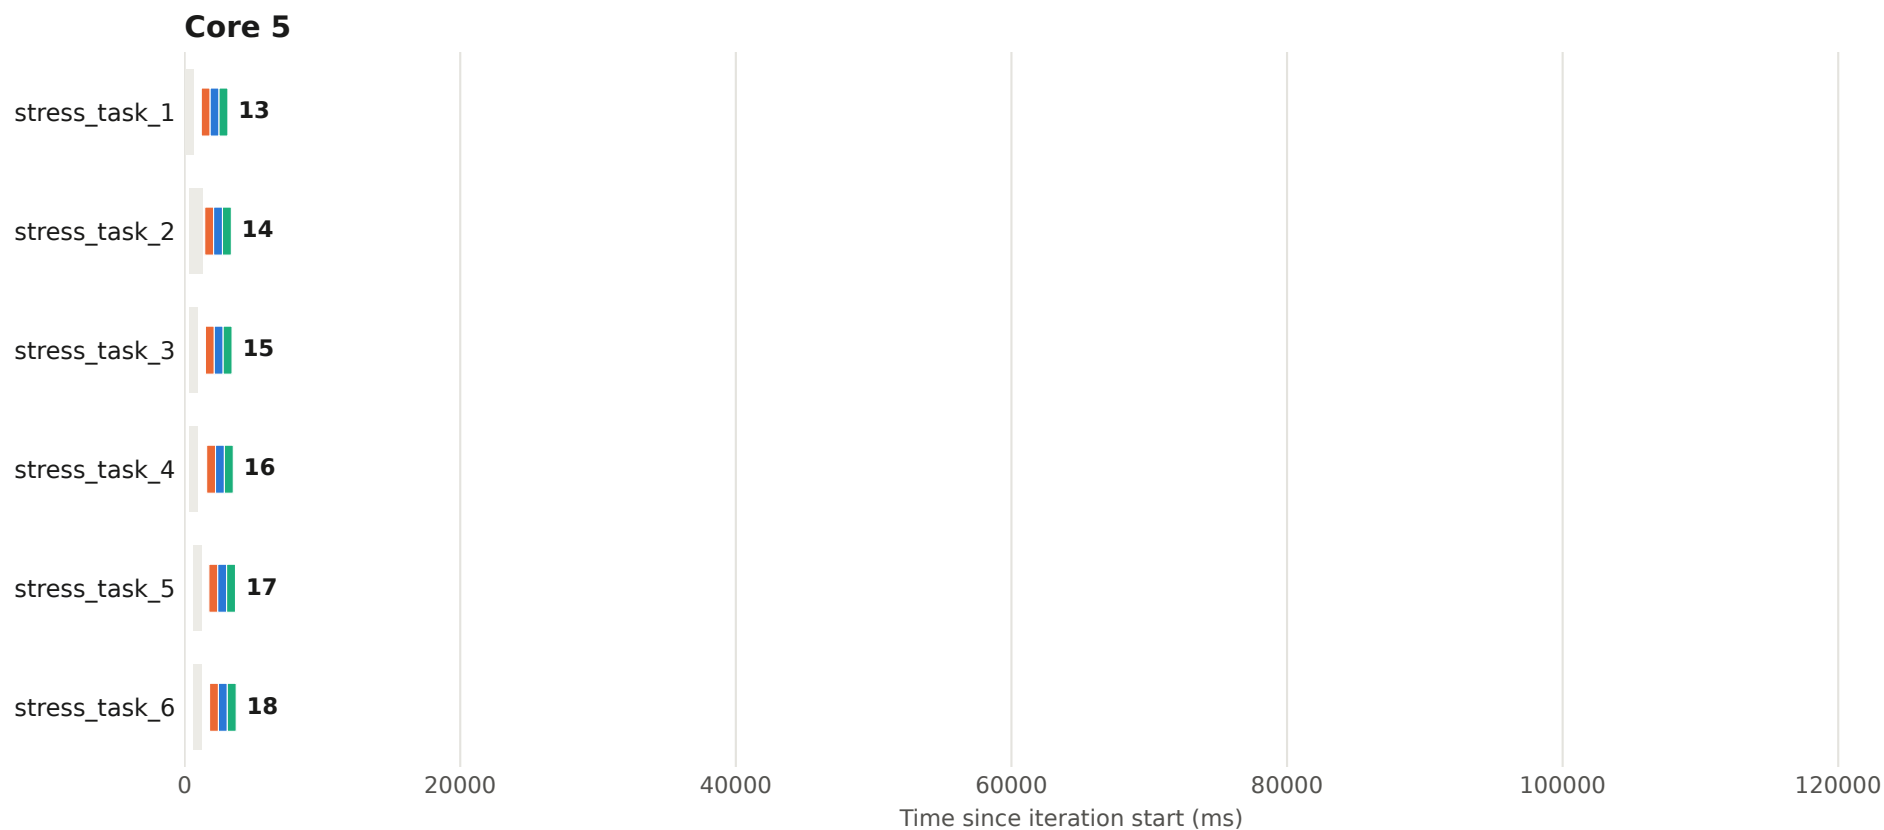


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 5 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

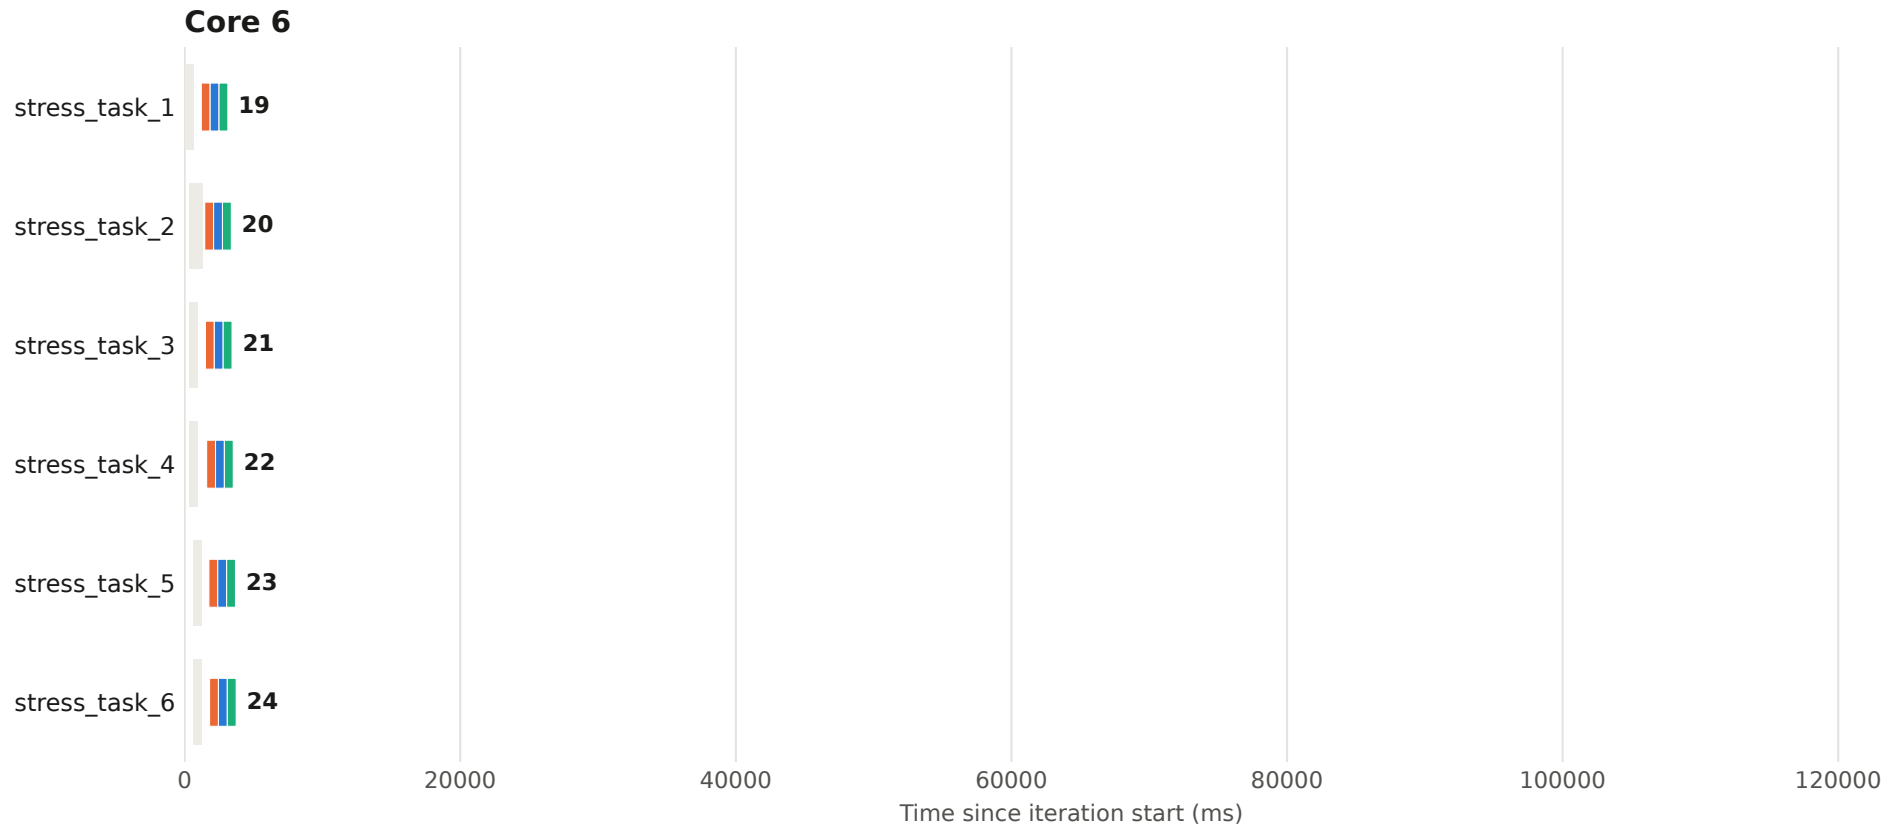


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 5 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

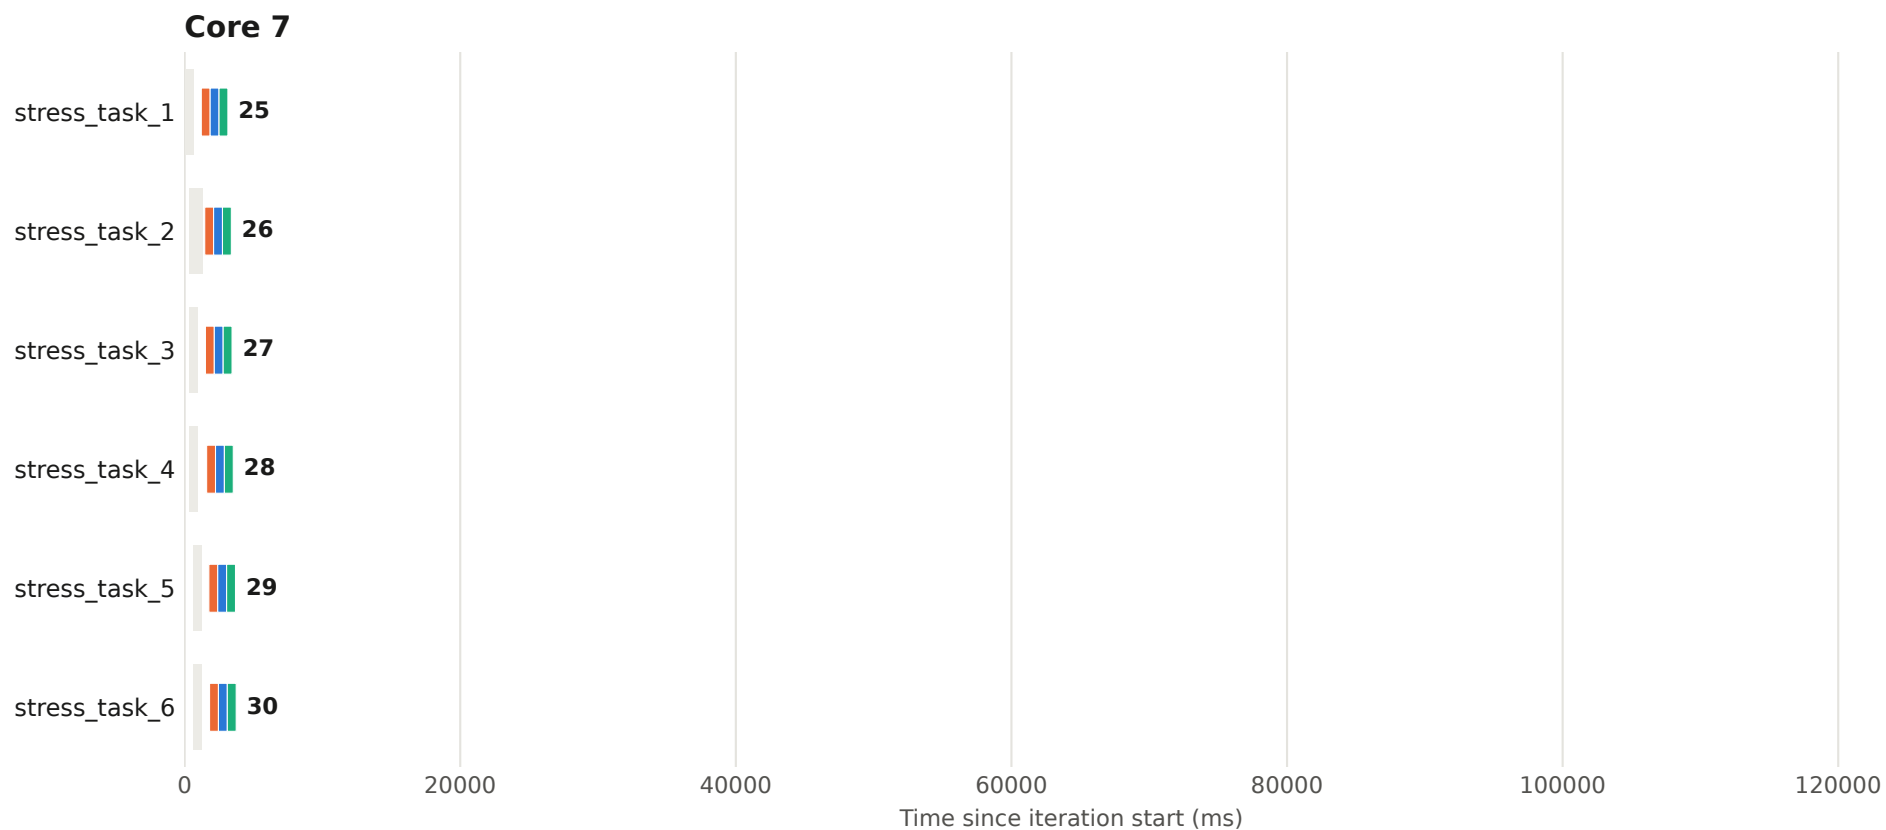


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 6 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

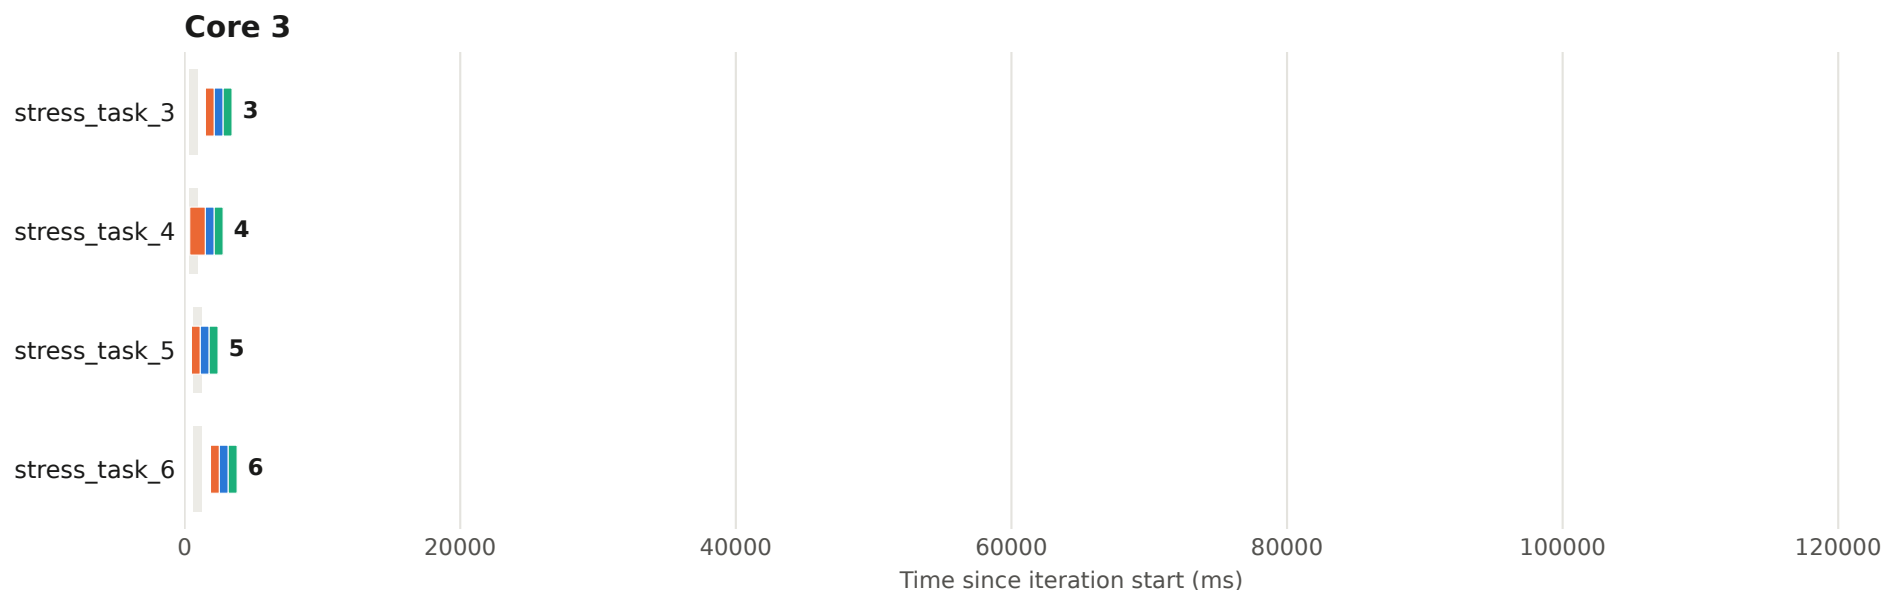

Execution plan - iteration 6 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

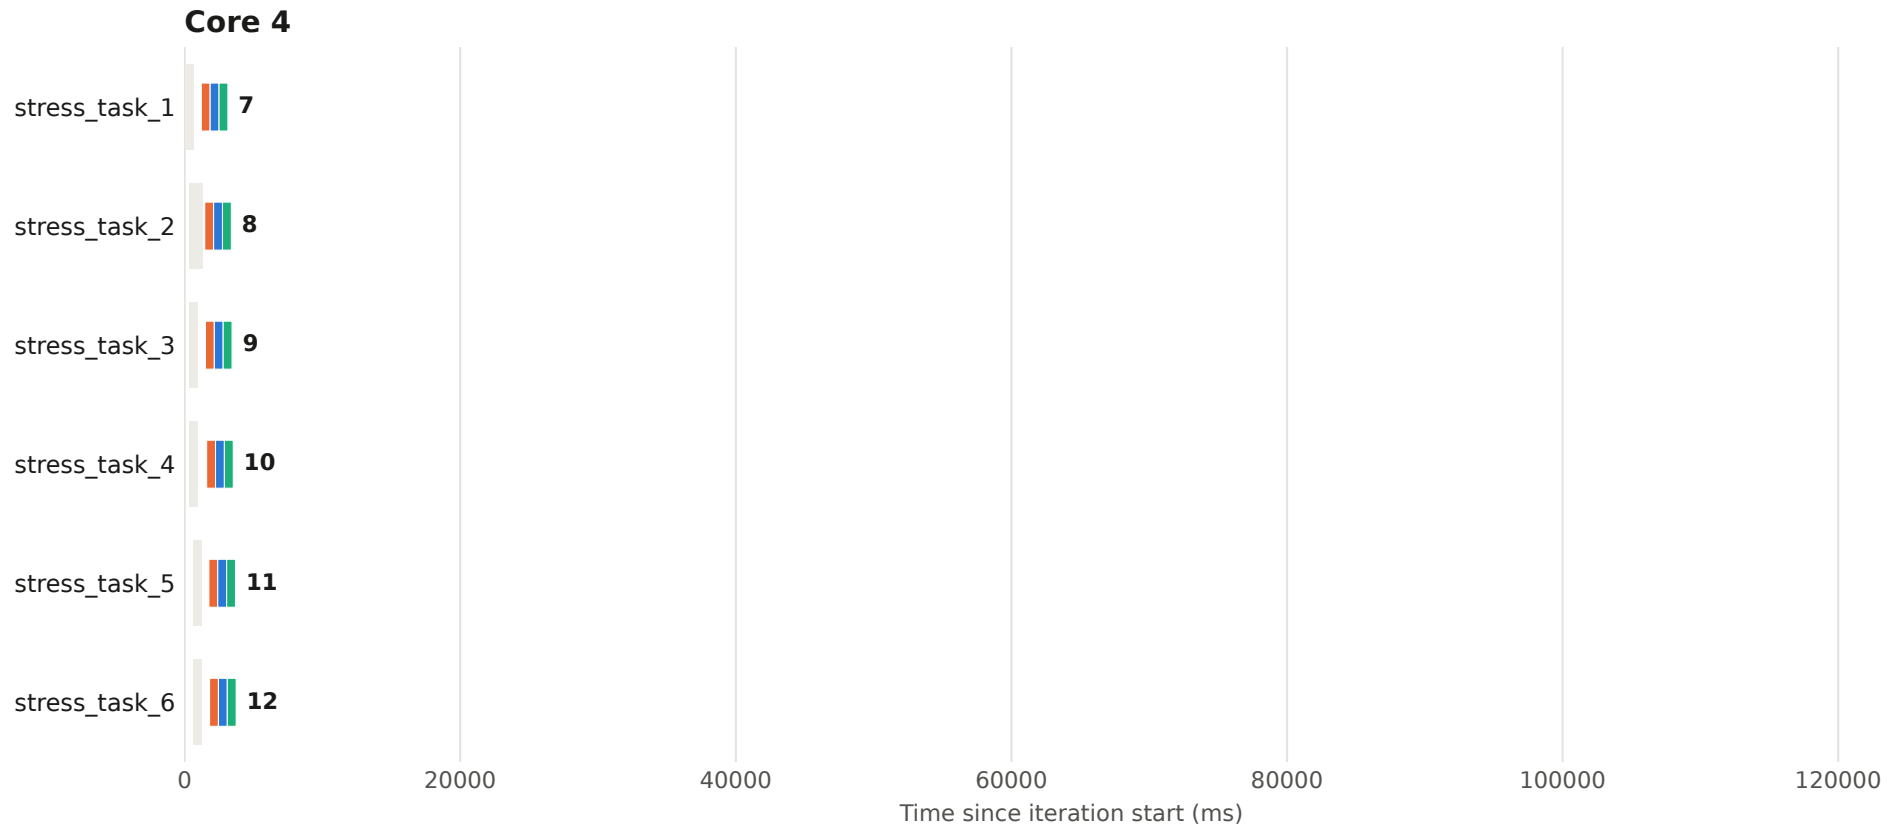


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 6 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

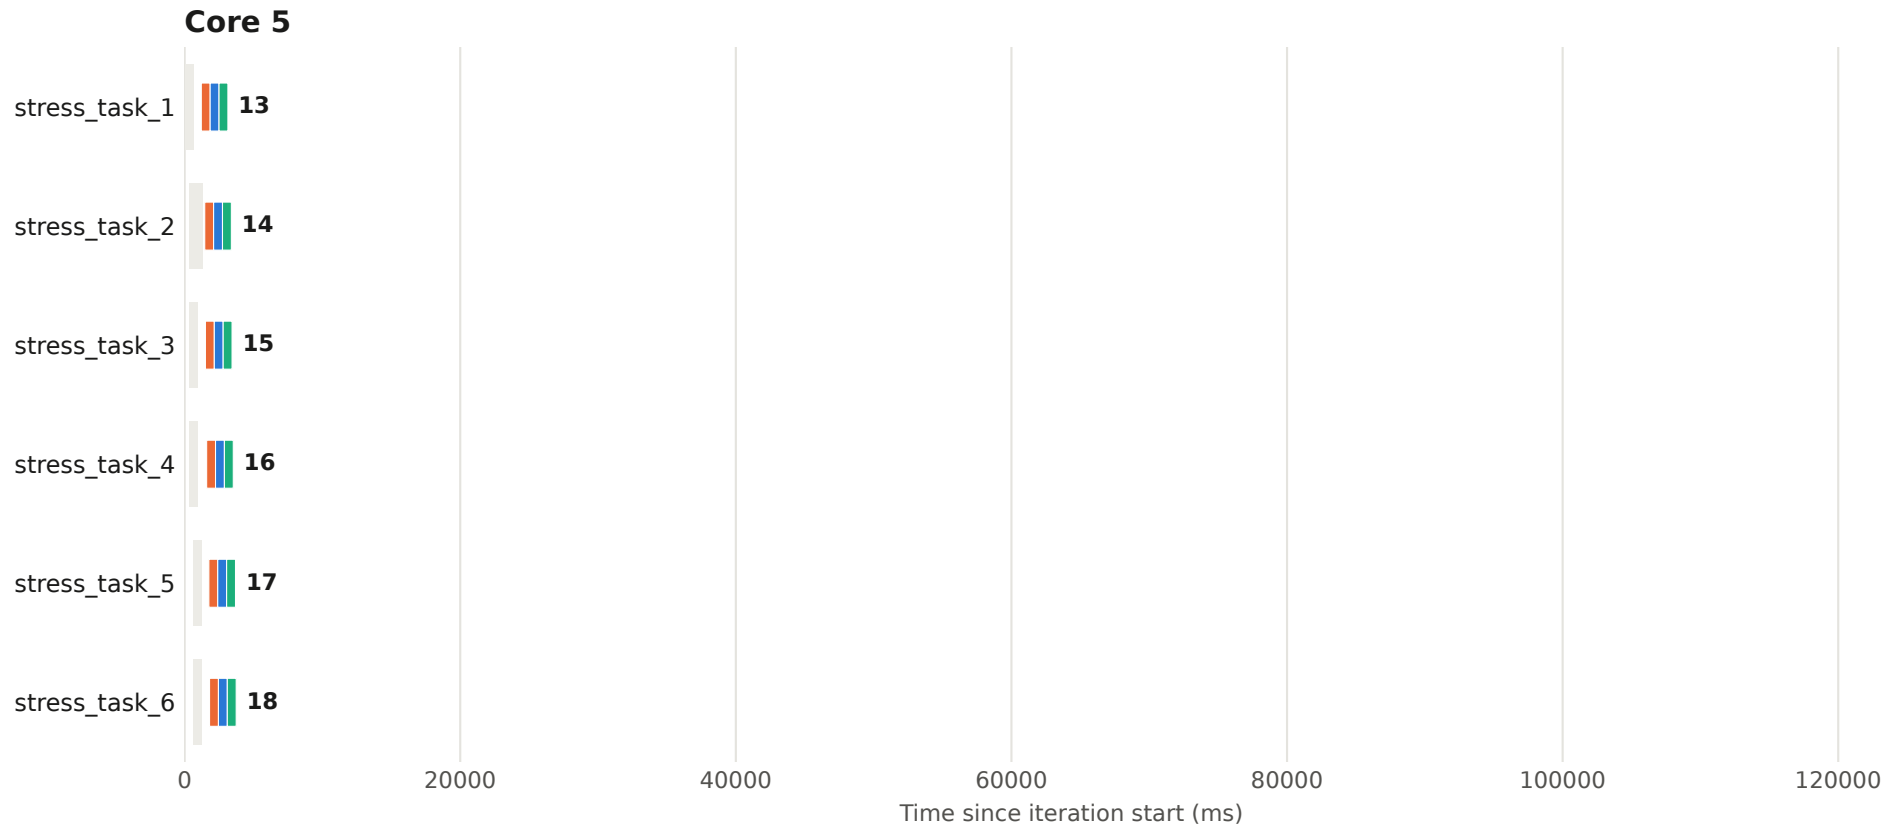


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 6 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

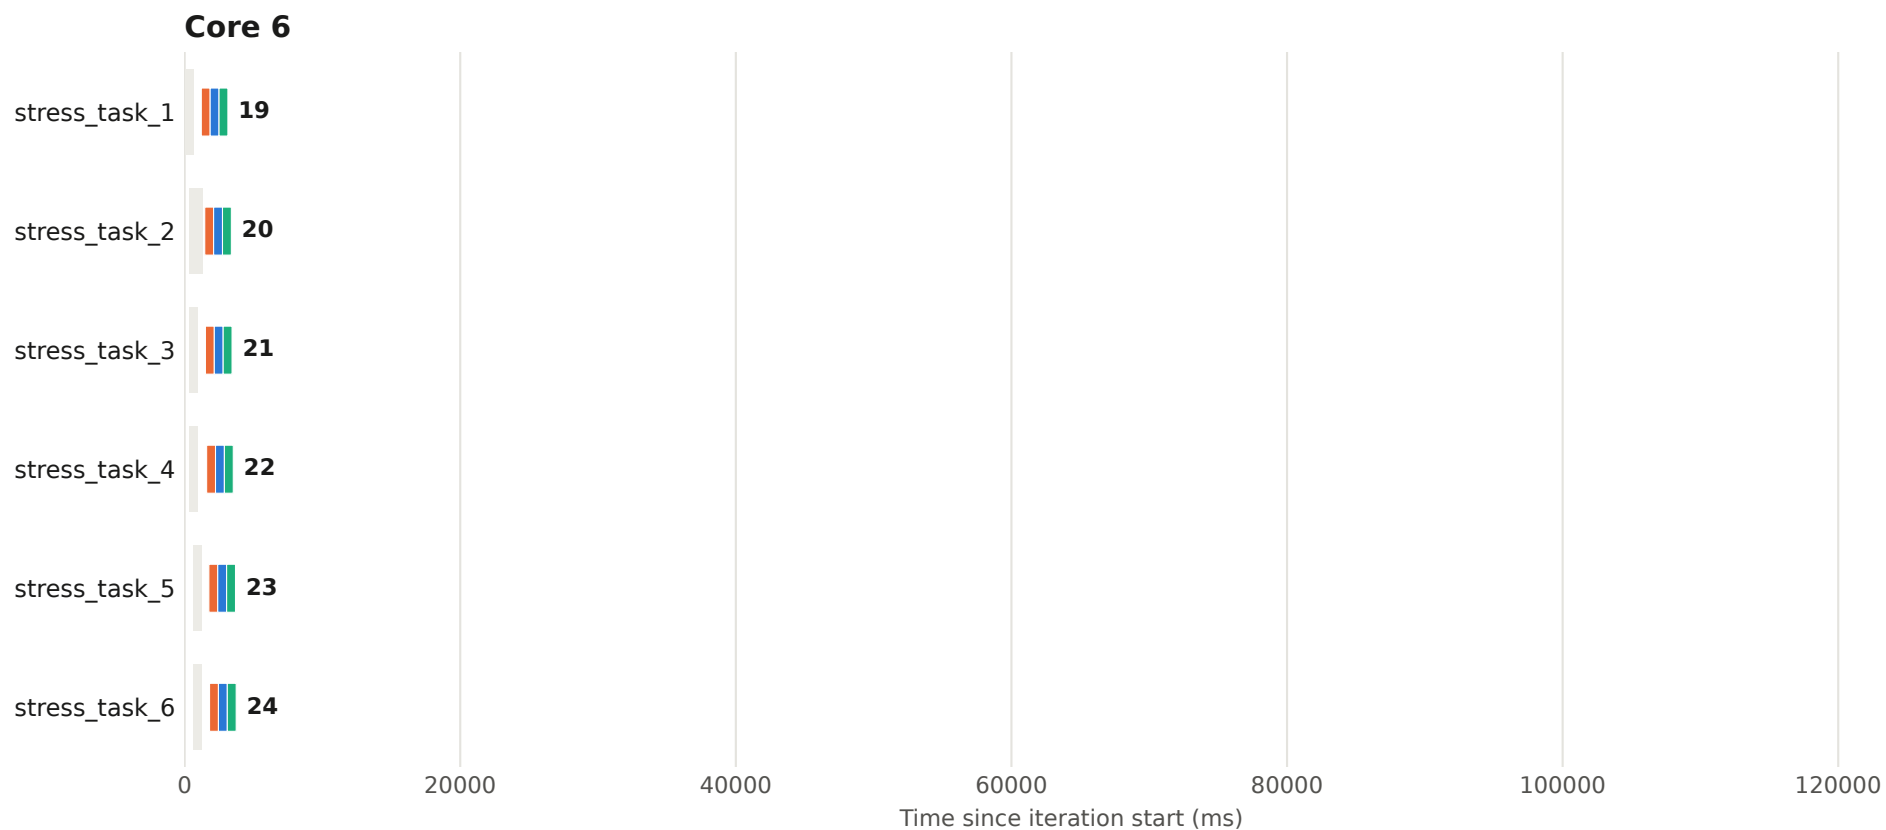


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 6 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

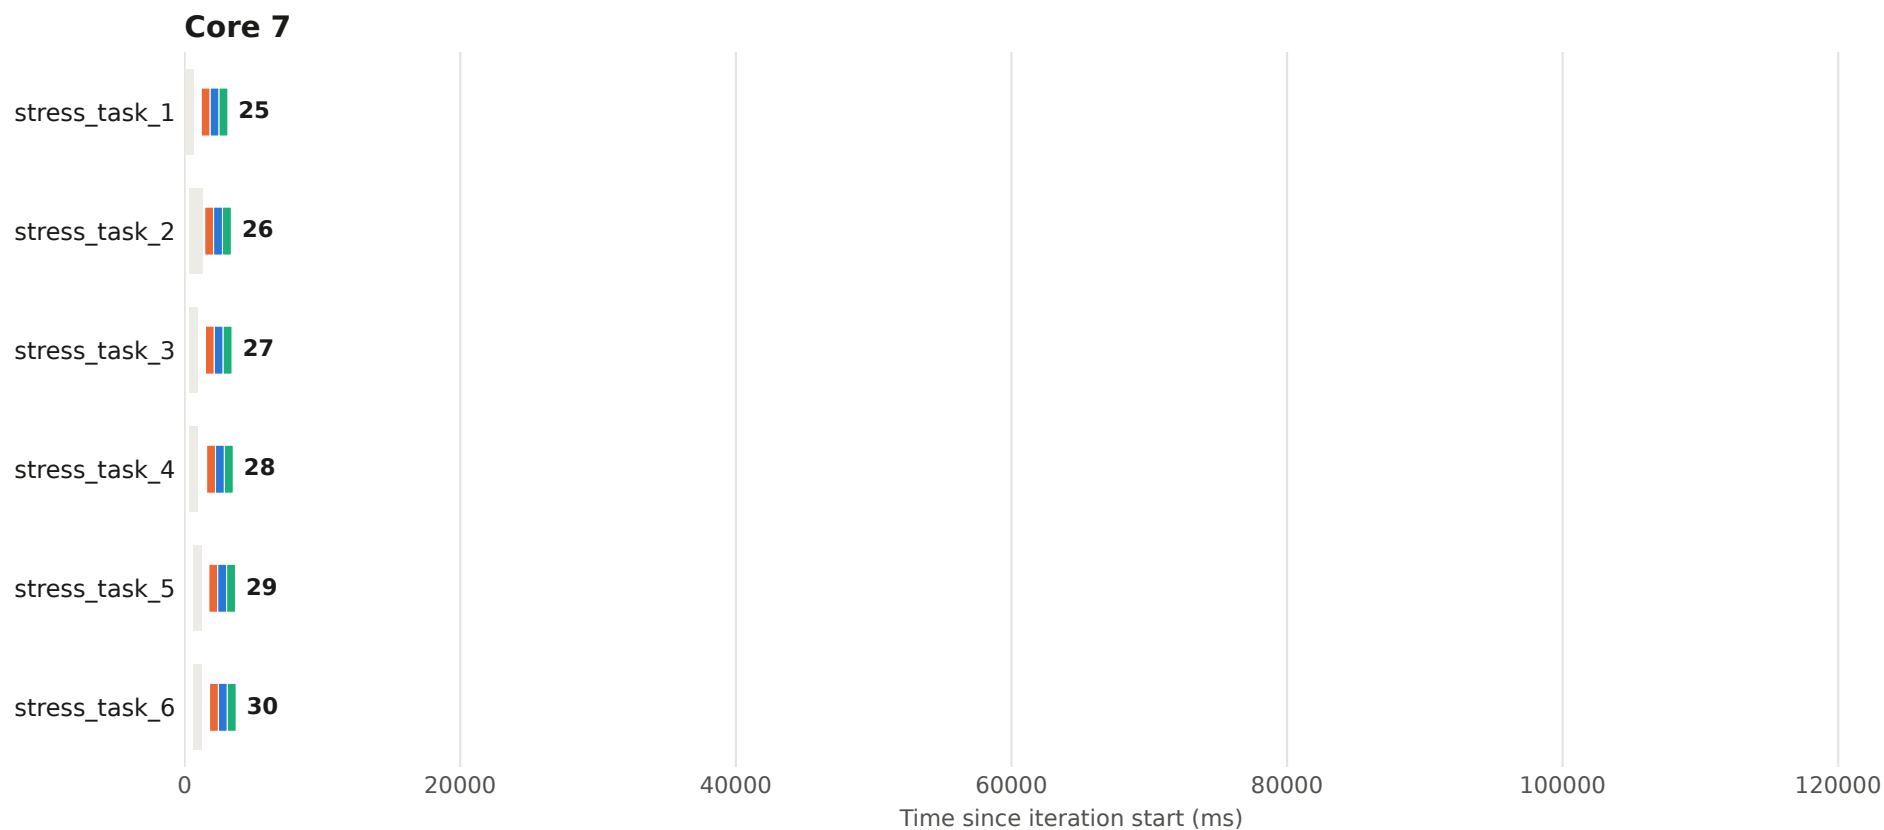


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 7 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

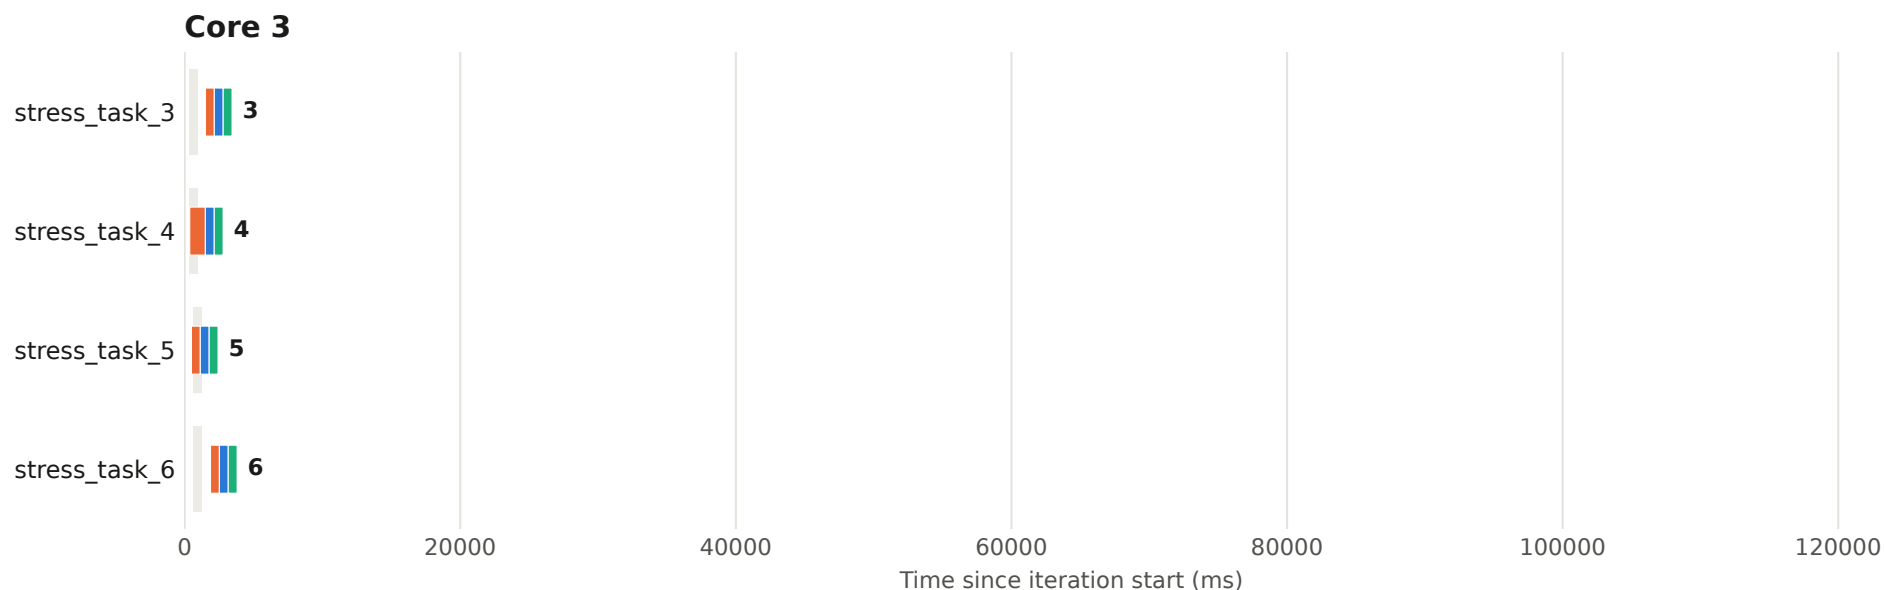

Execution plan - iteration 7 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

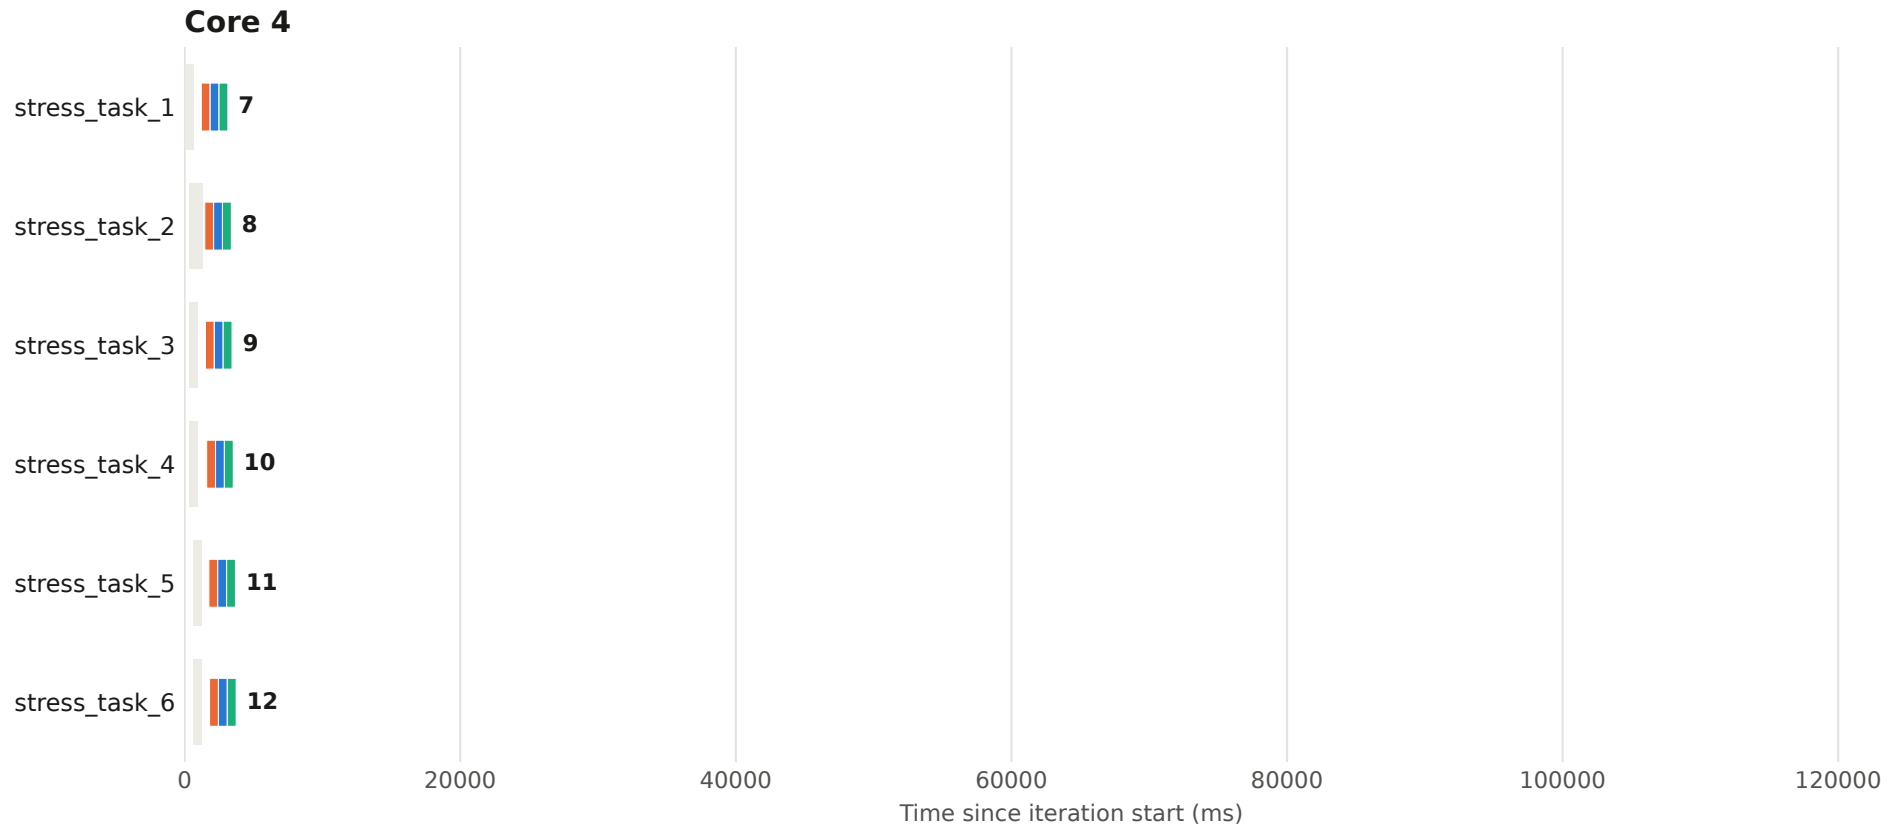


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 7 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

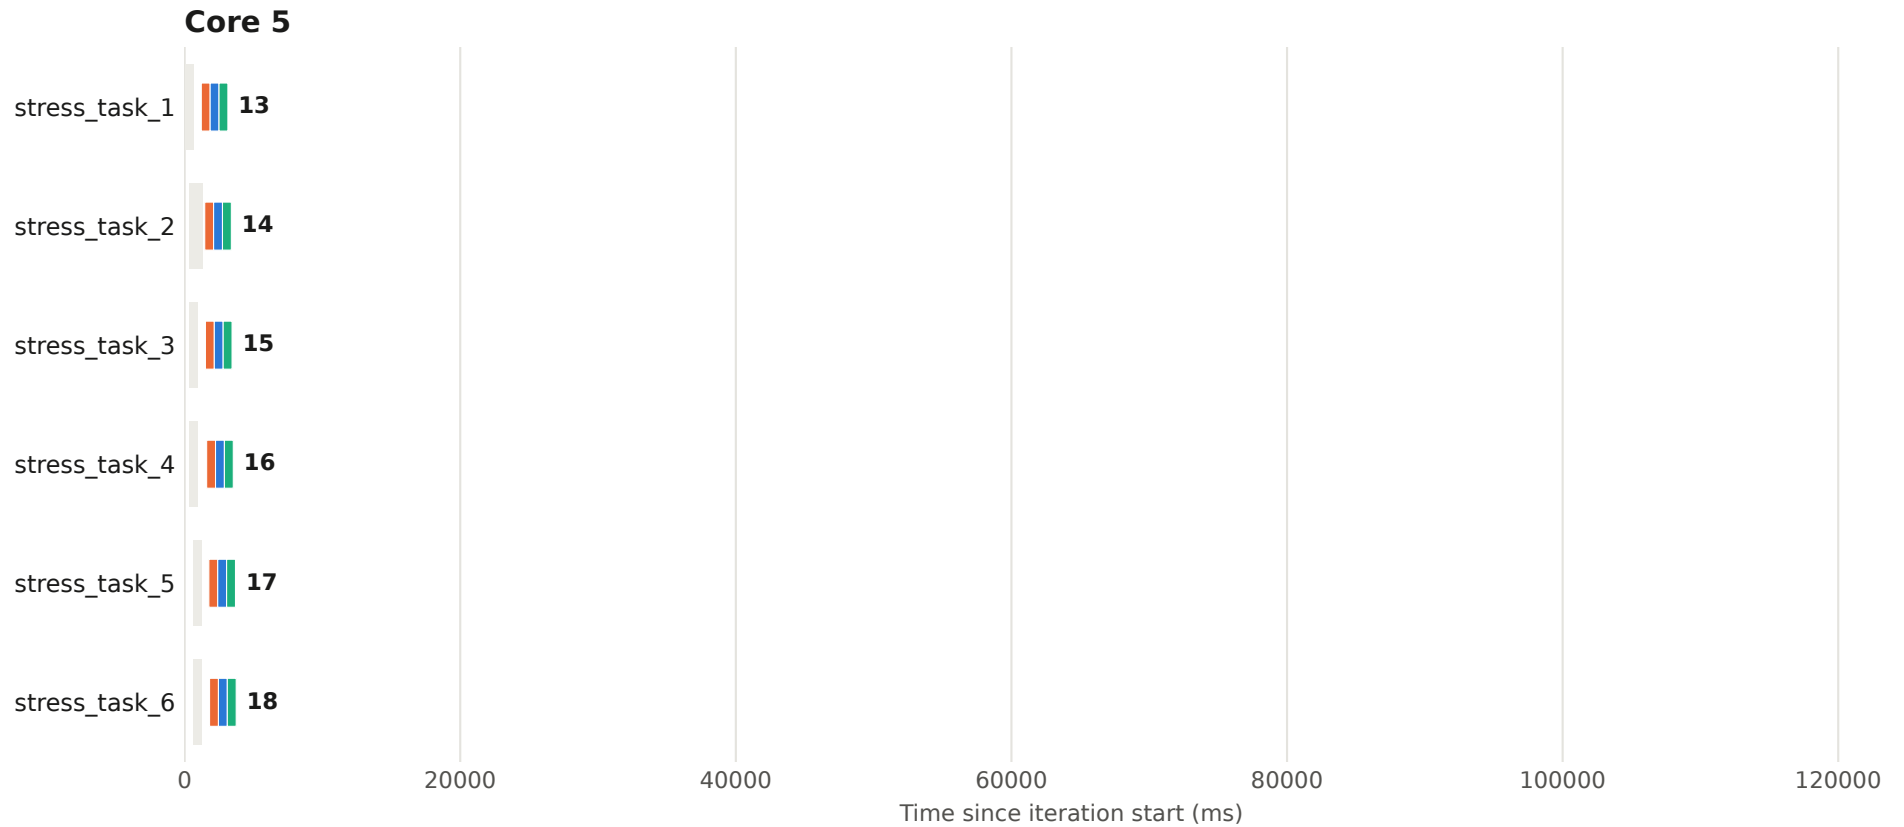


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 7 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

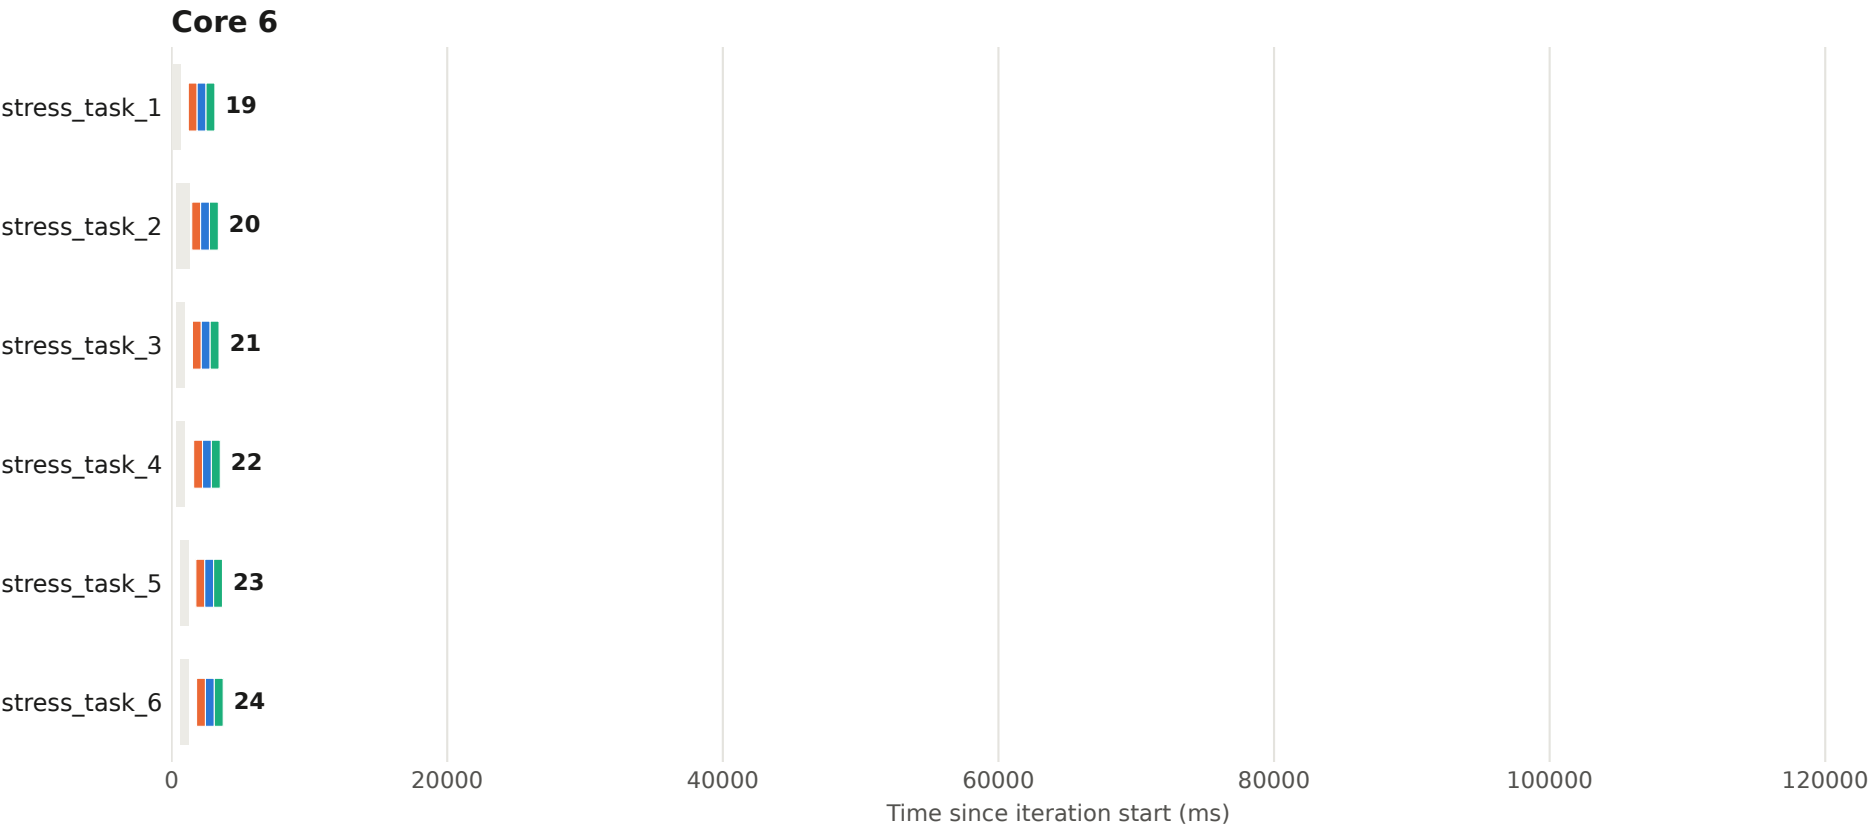


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 7 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

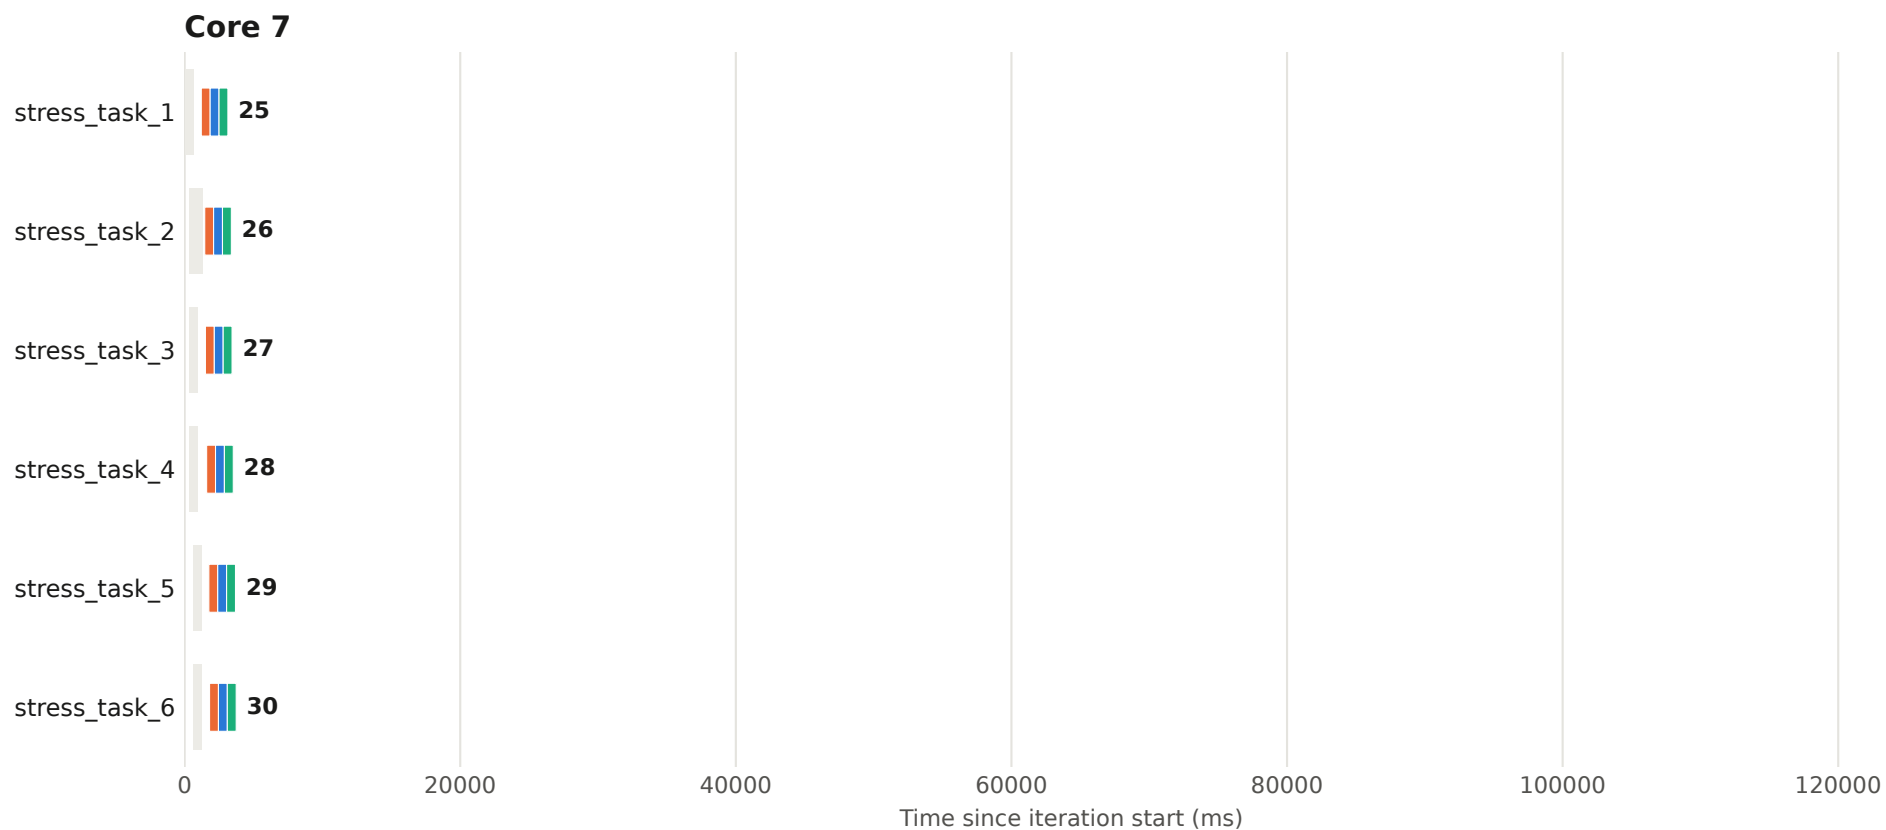


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 8 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

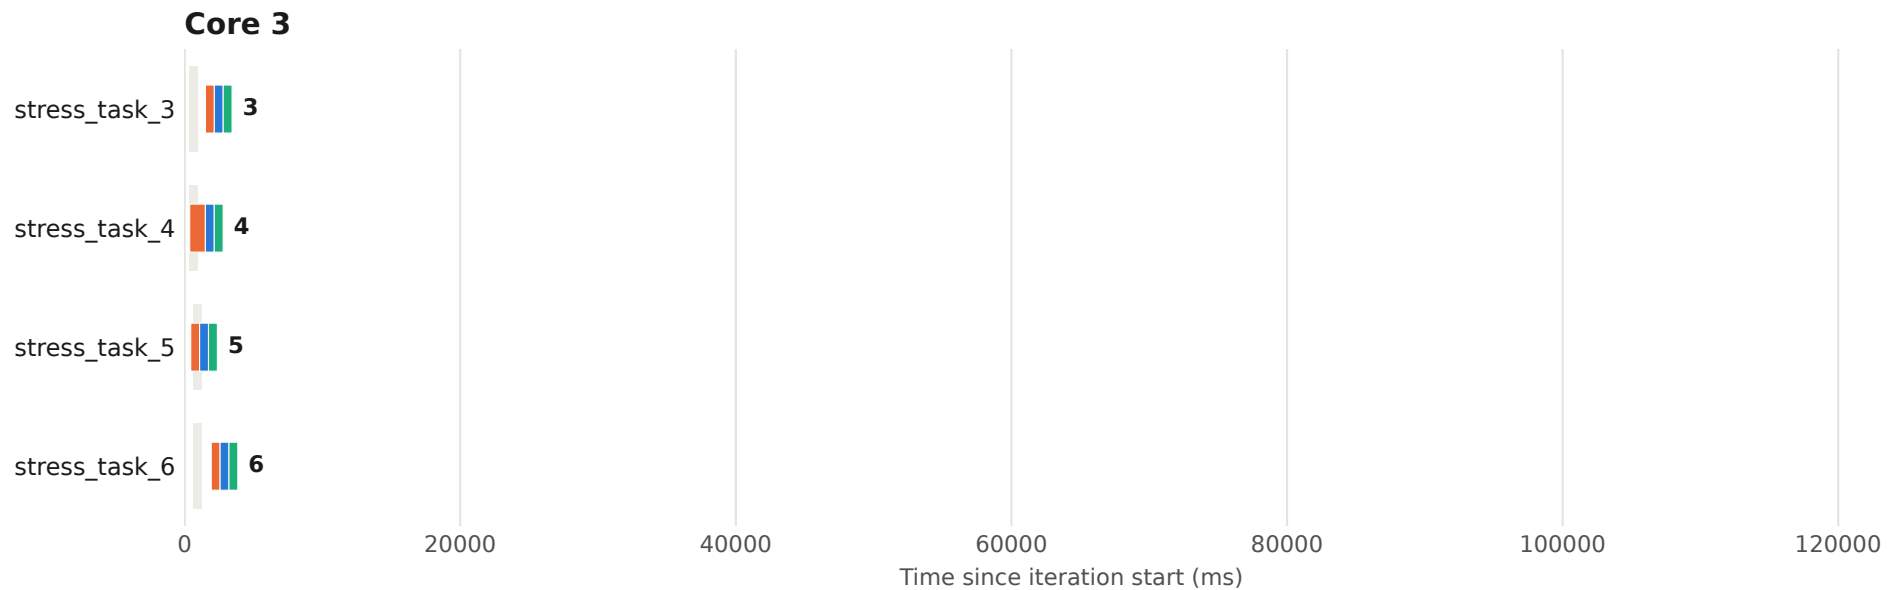


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 8 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

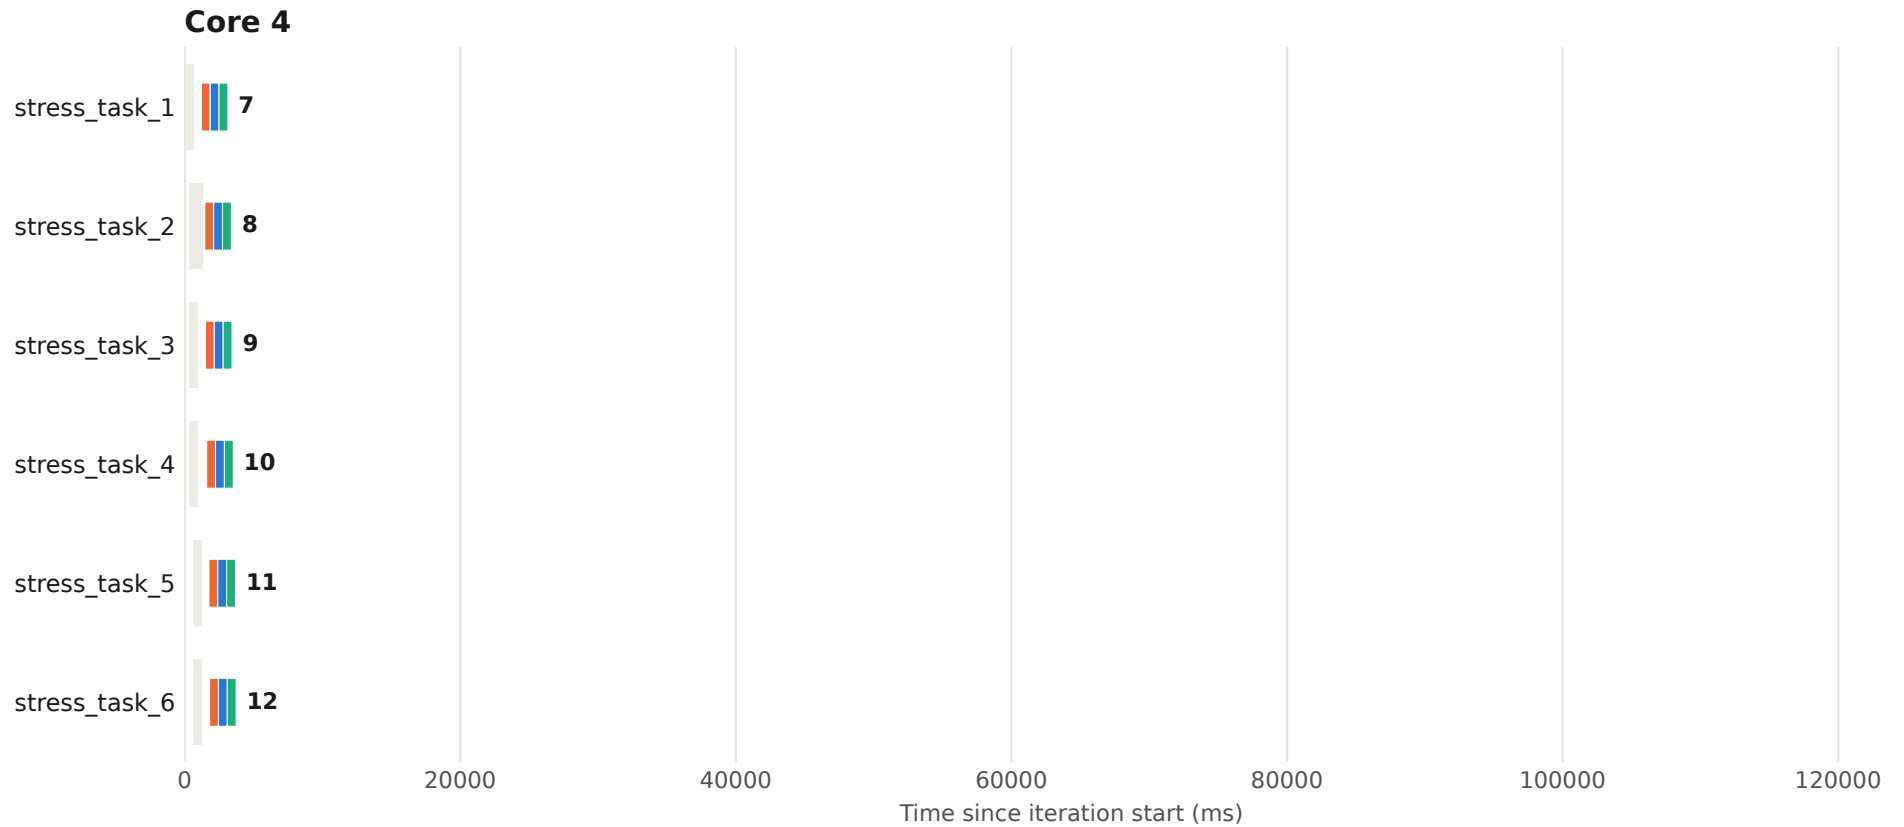


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 8 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

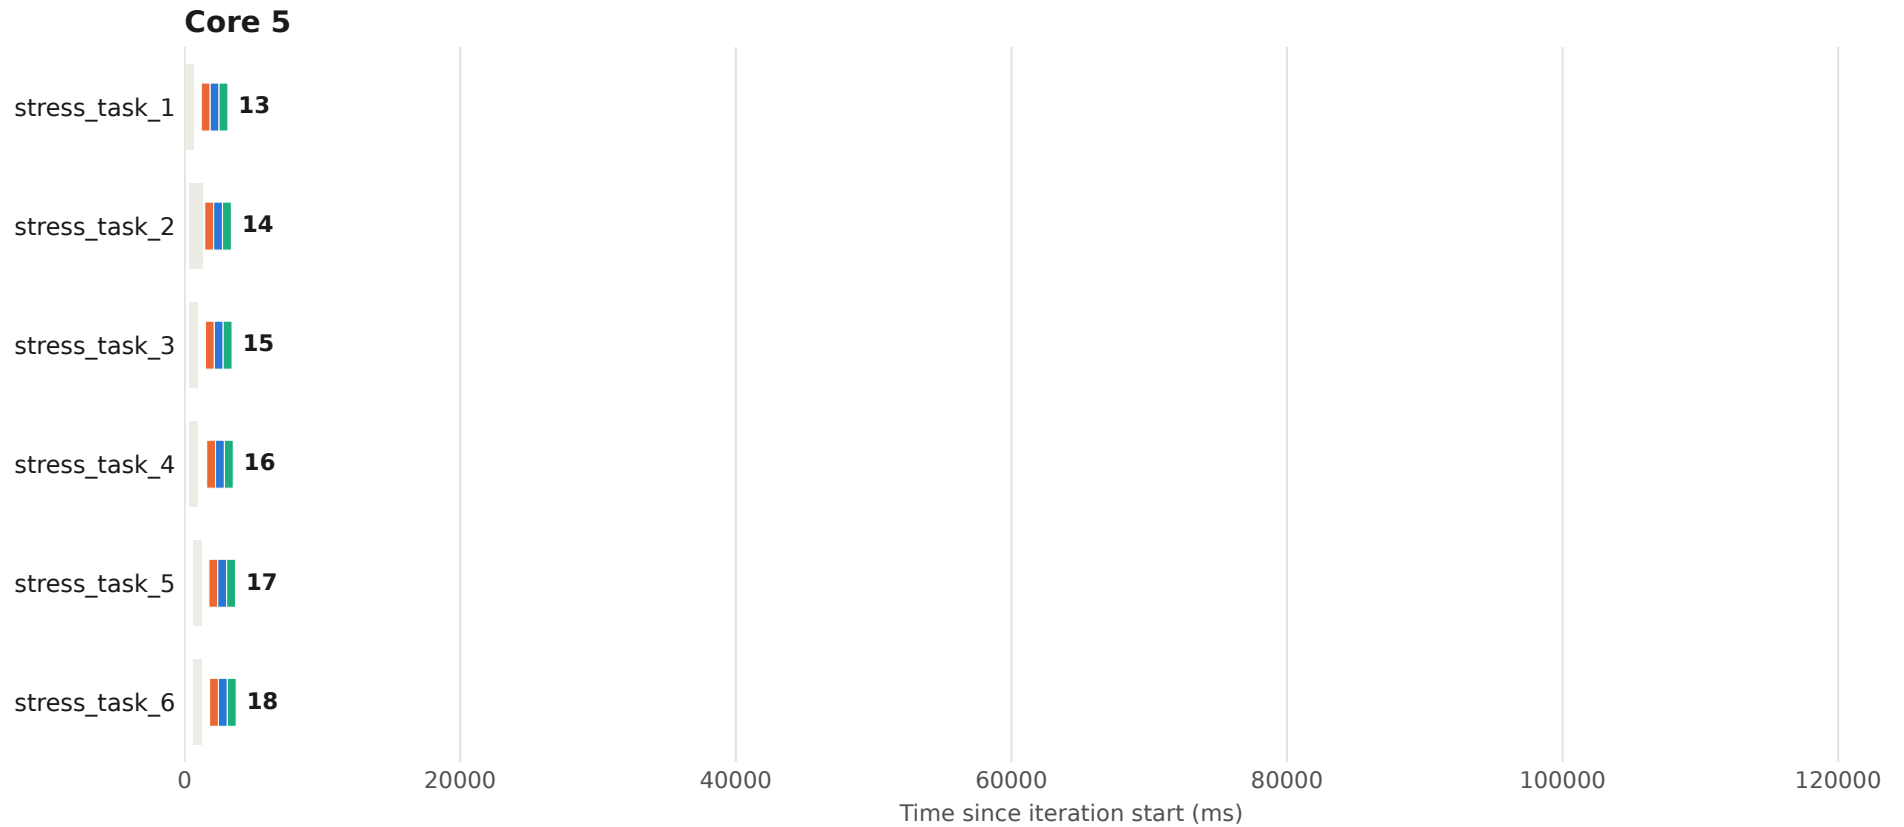


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 8 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

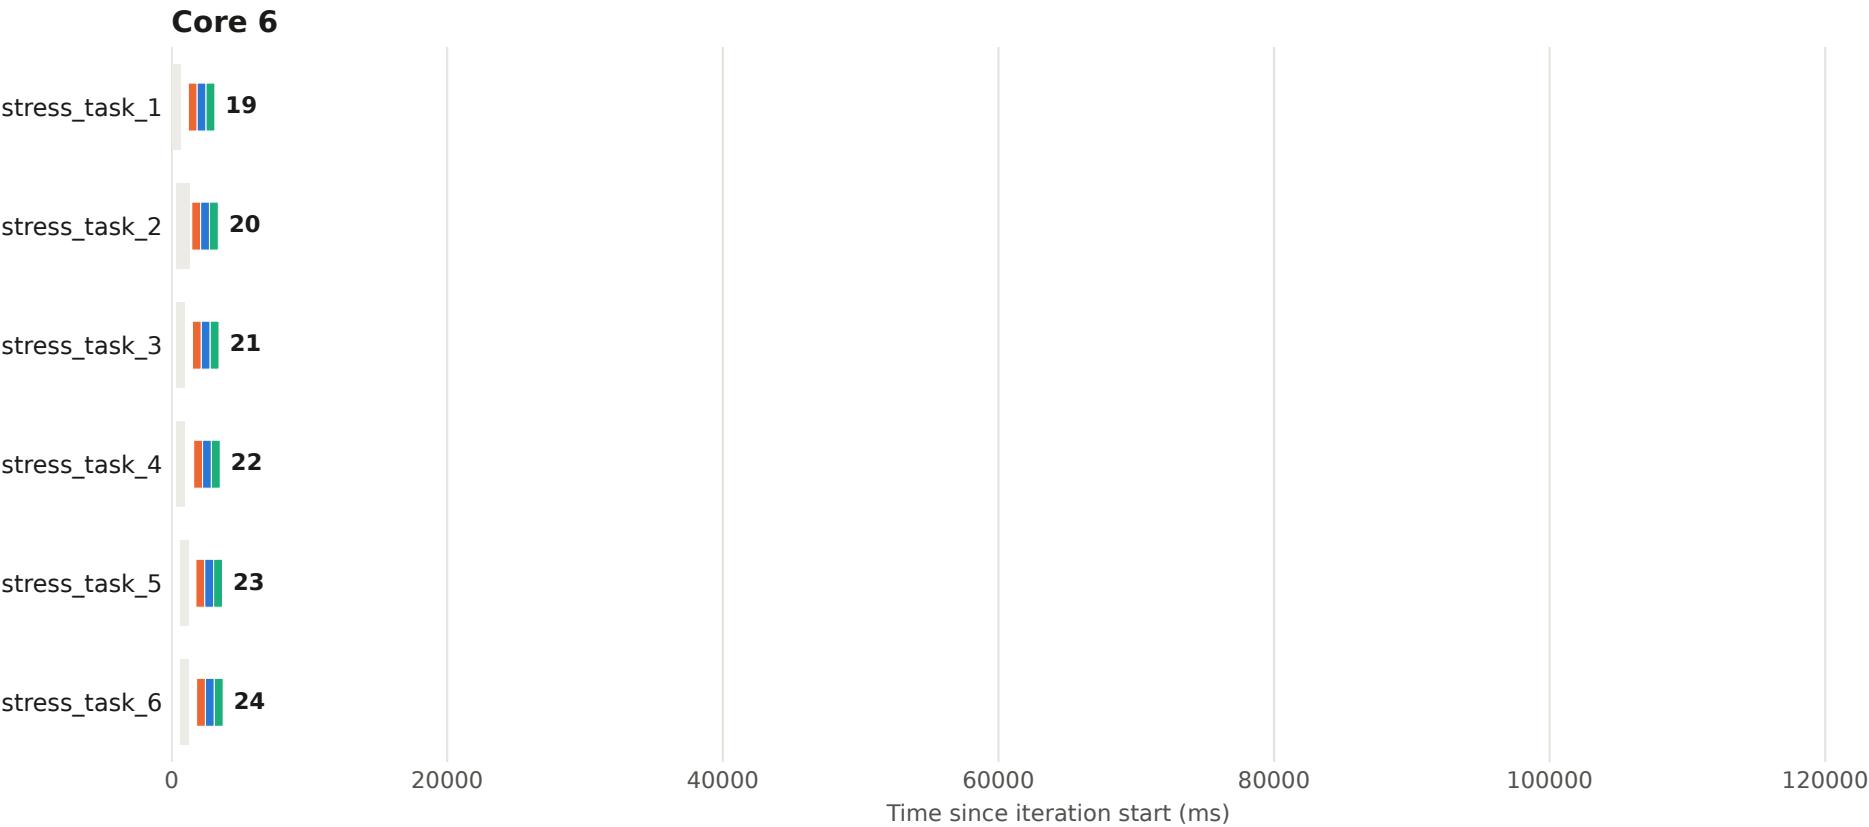


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 8 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

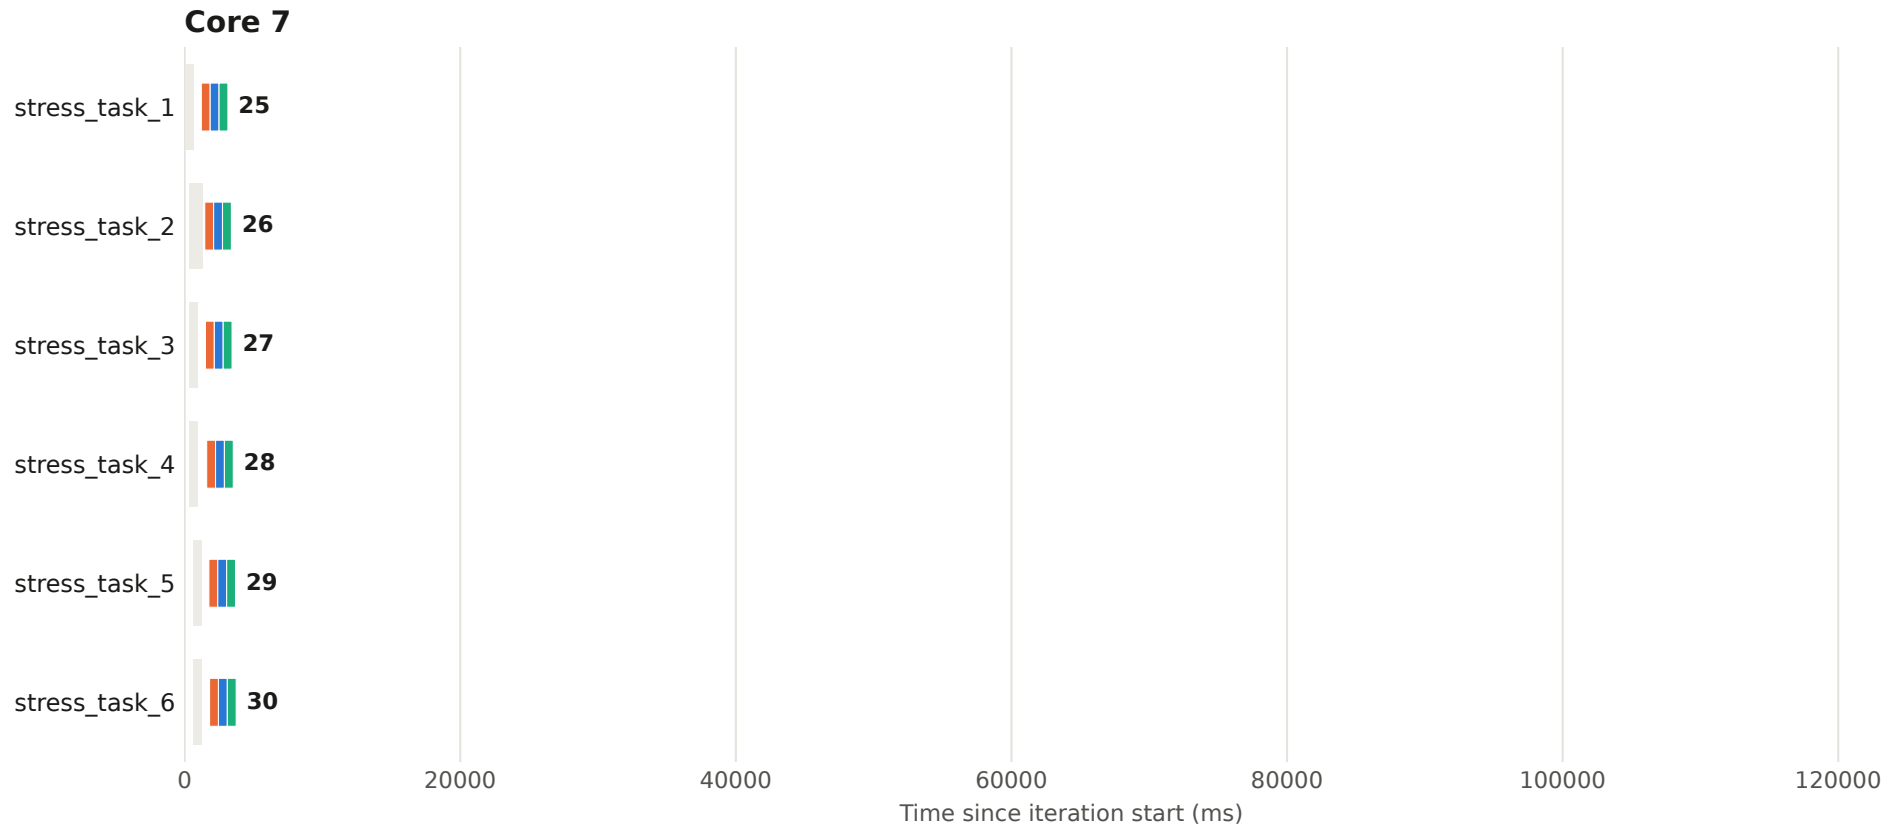


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 9 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

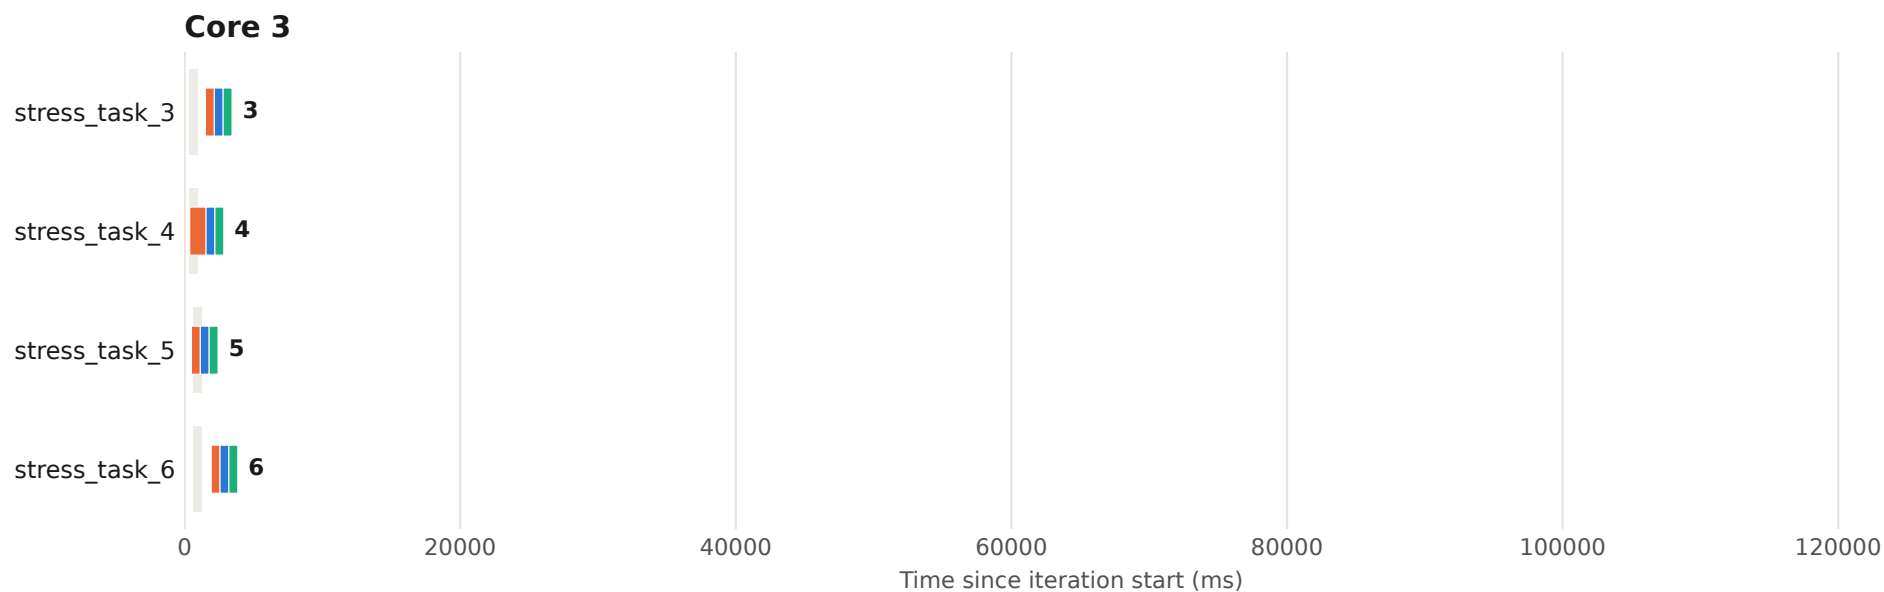

Execution plan - iteration 9 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

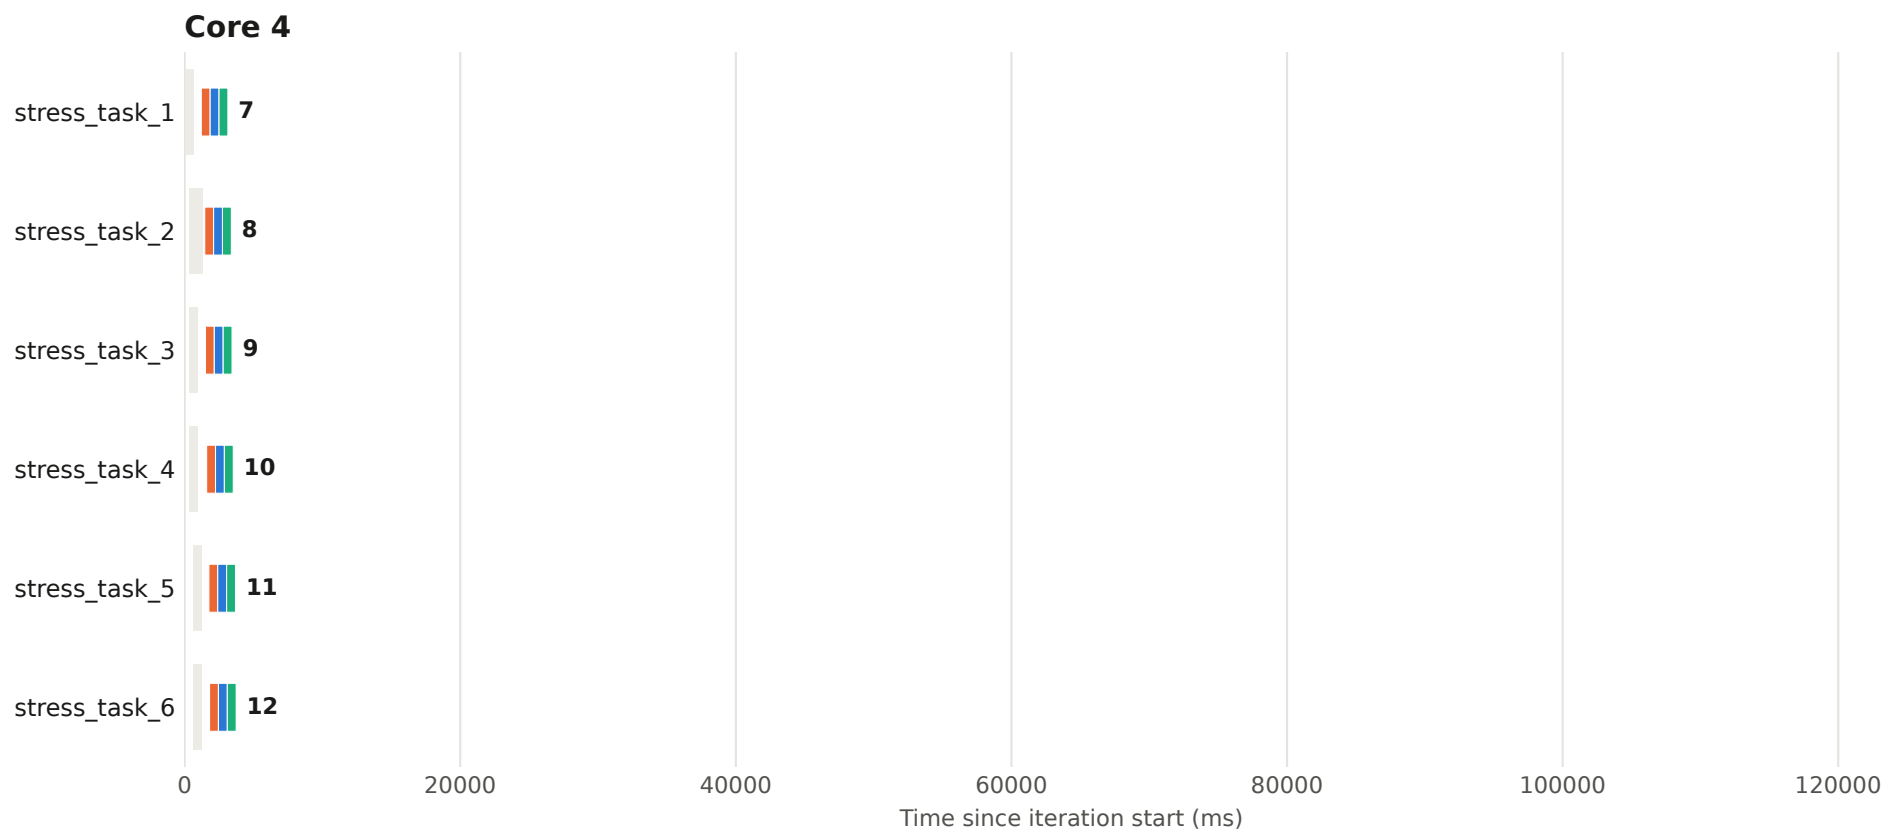


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 9 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

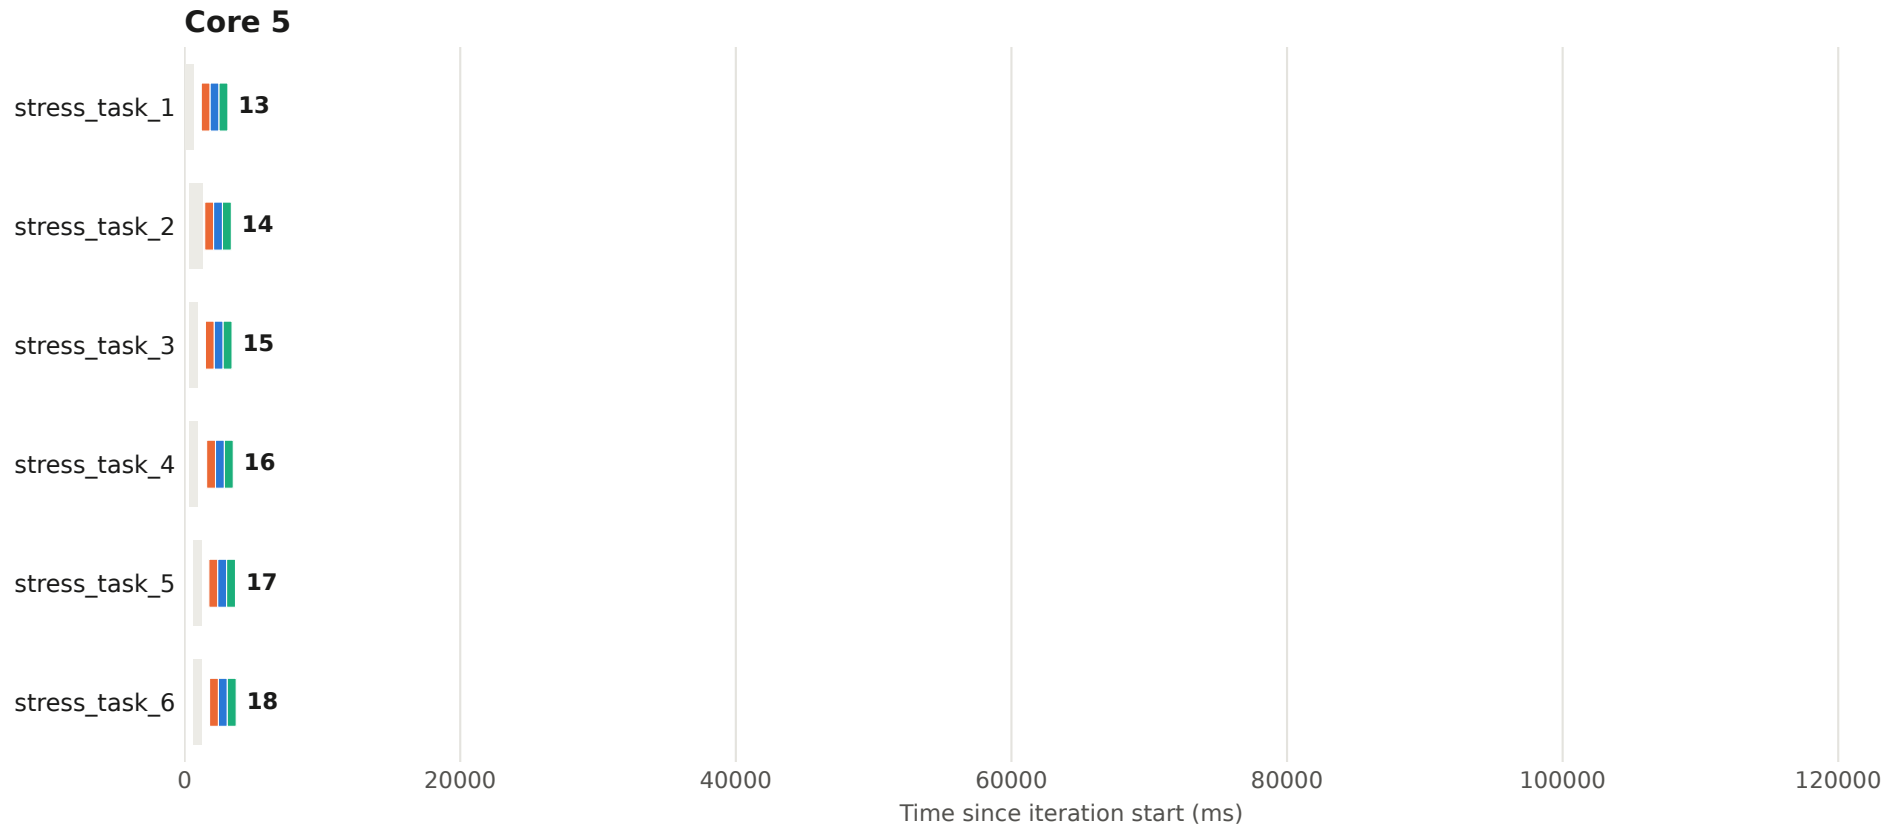


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 9 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

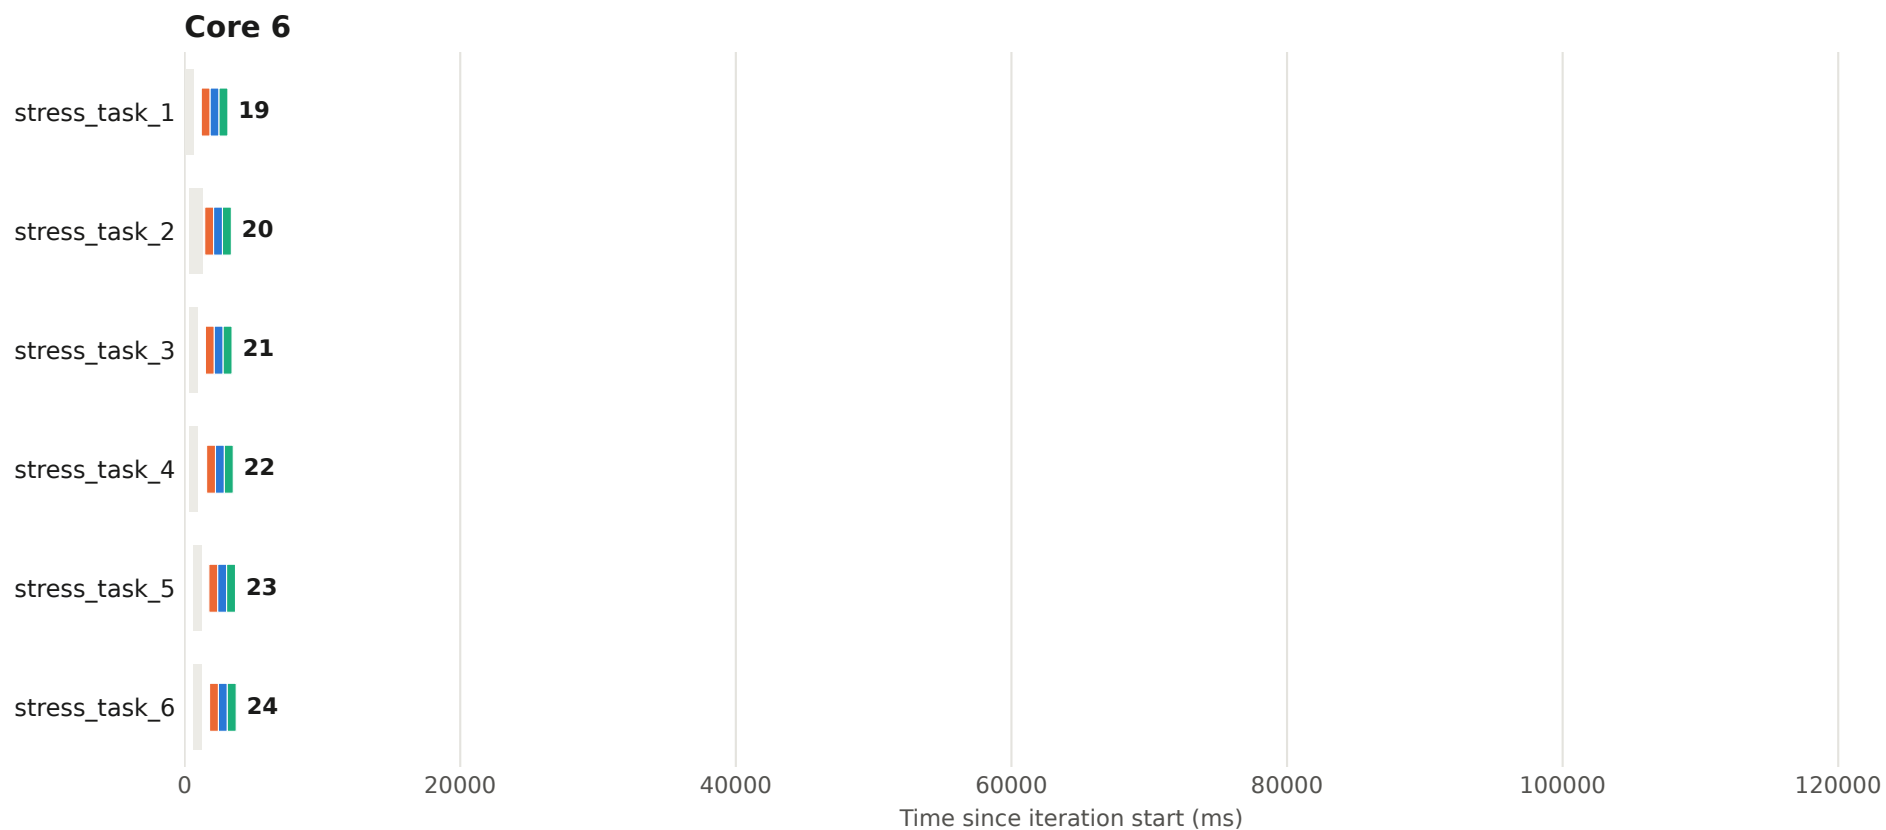


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 9 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

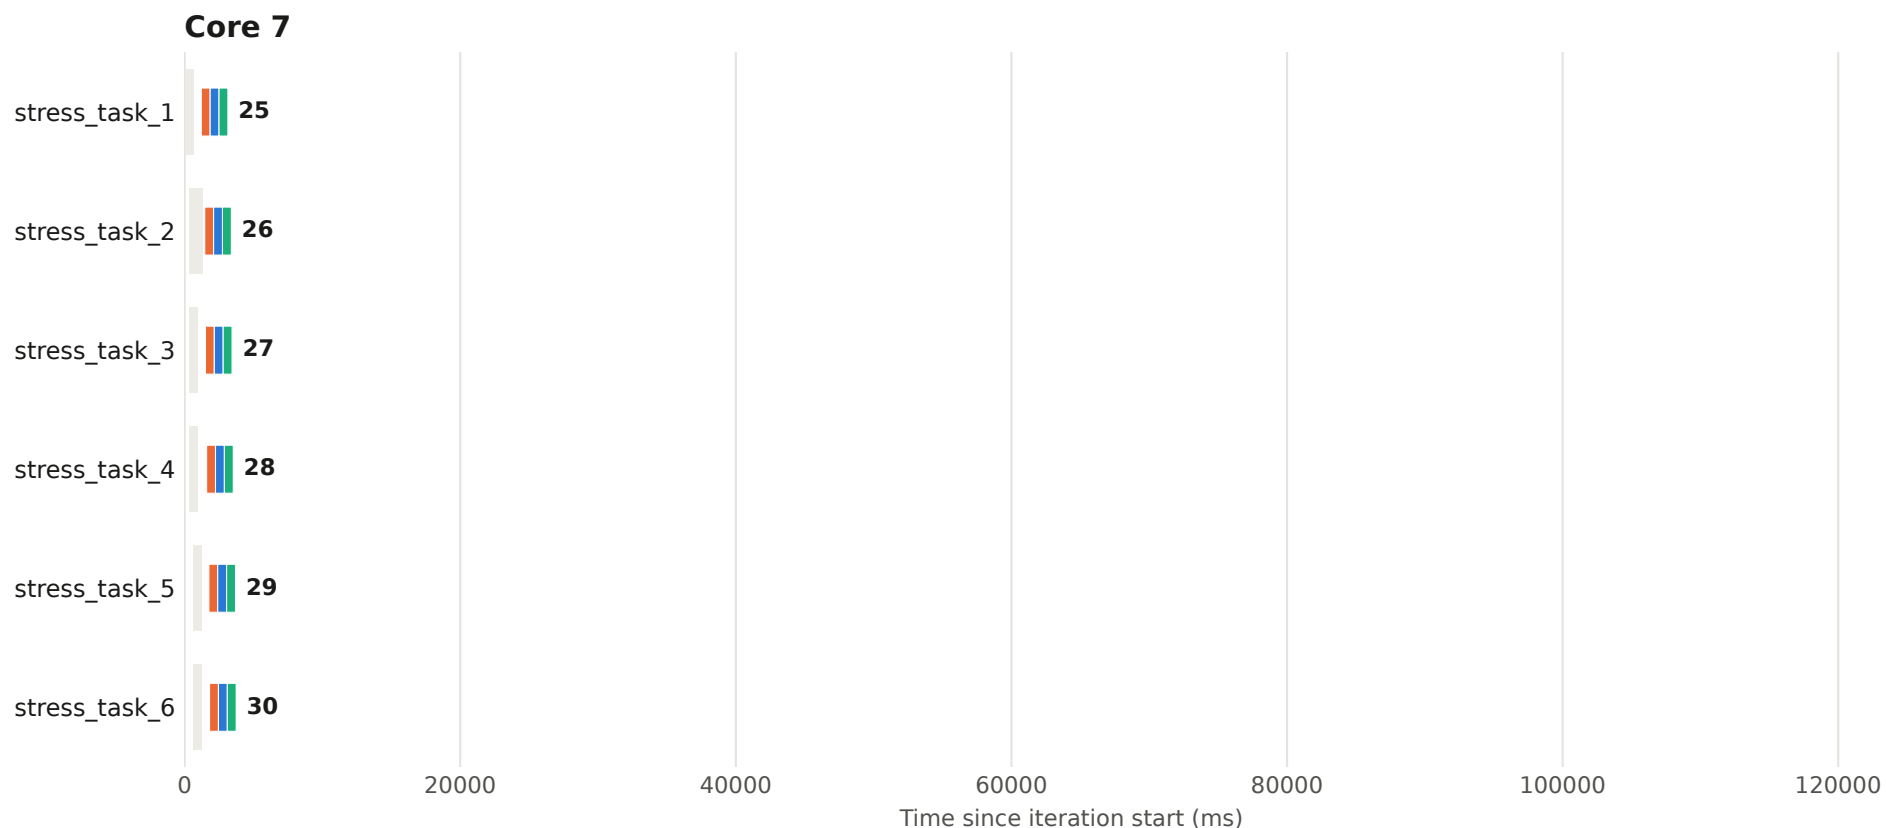


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 10 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

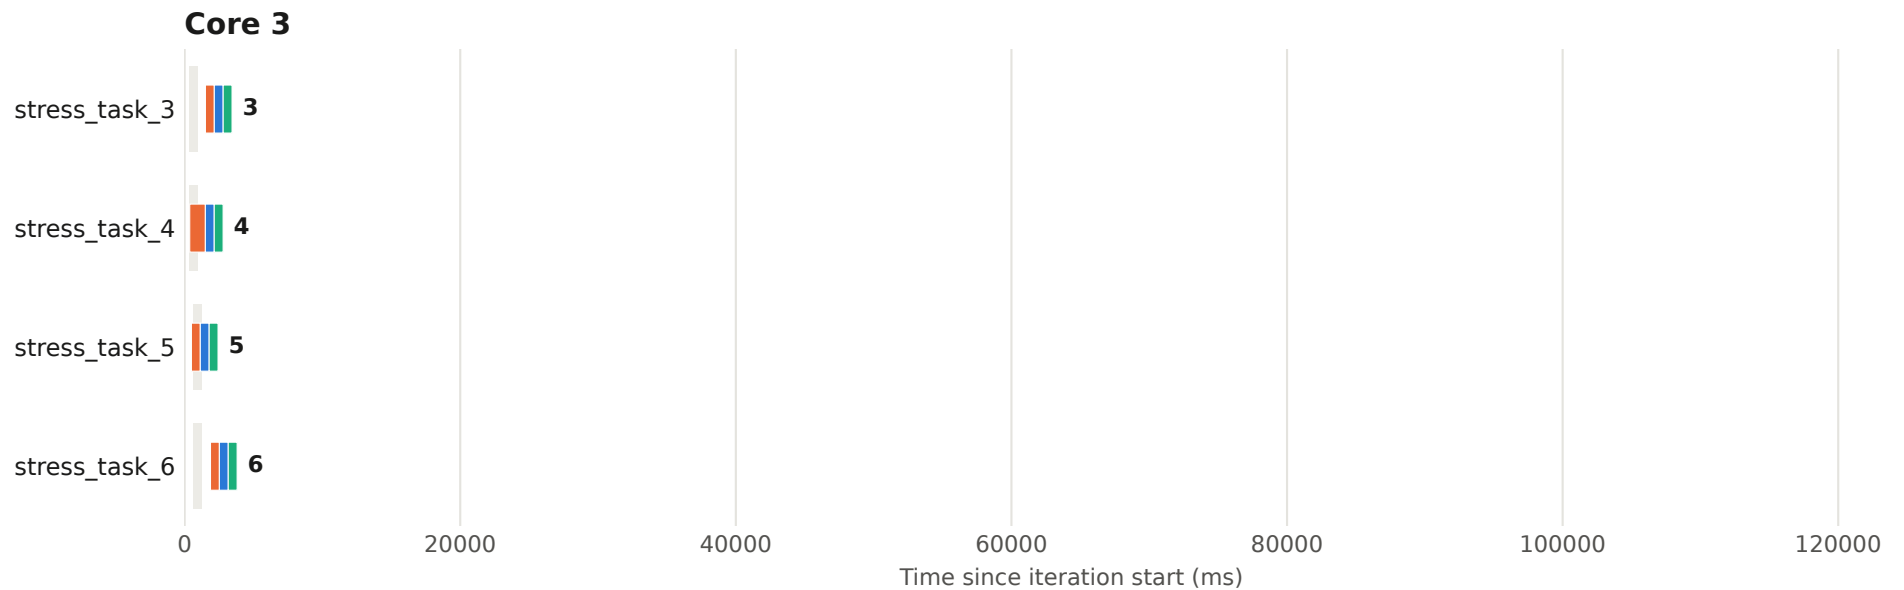


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 10 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

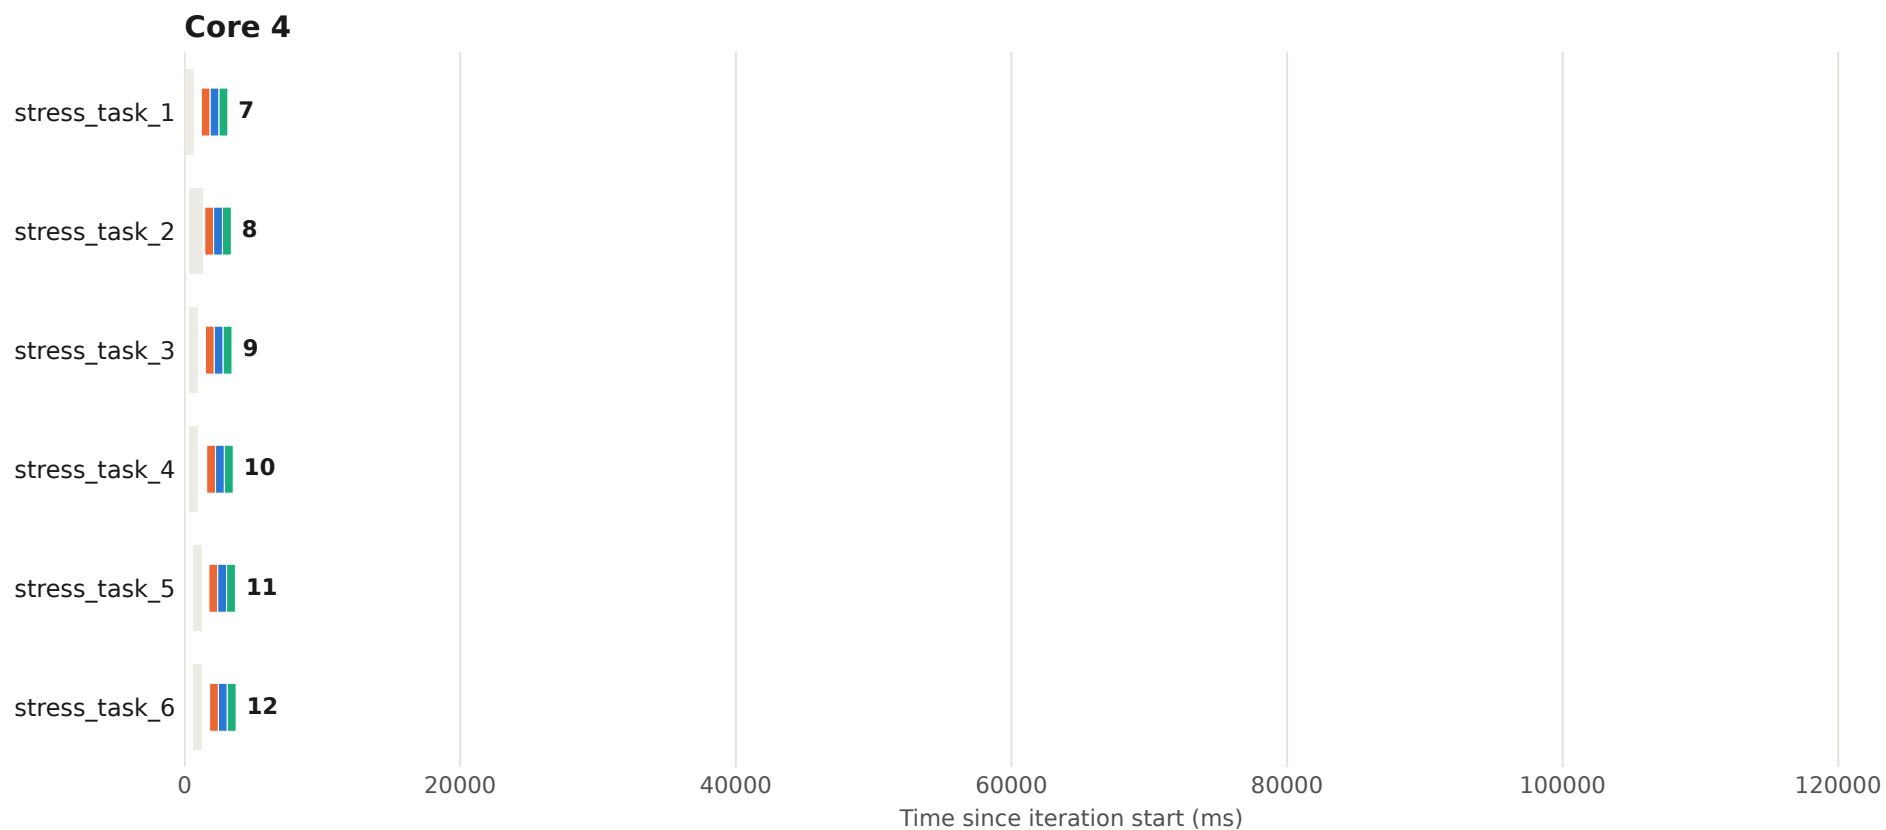


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 10 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

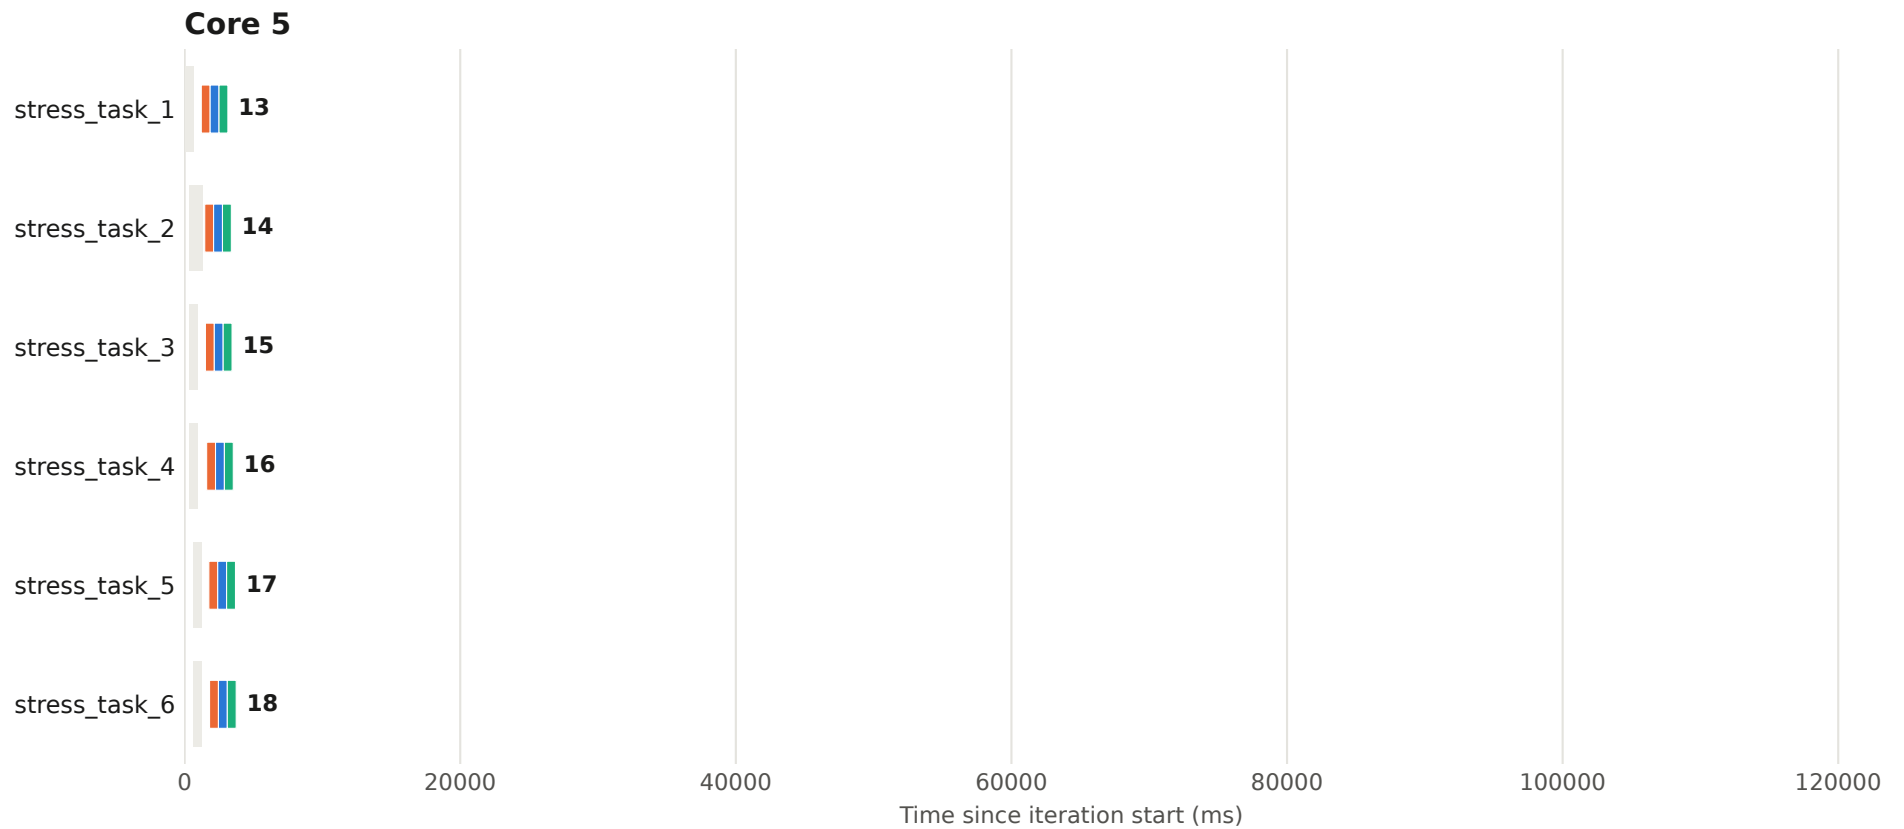


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 10 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

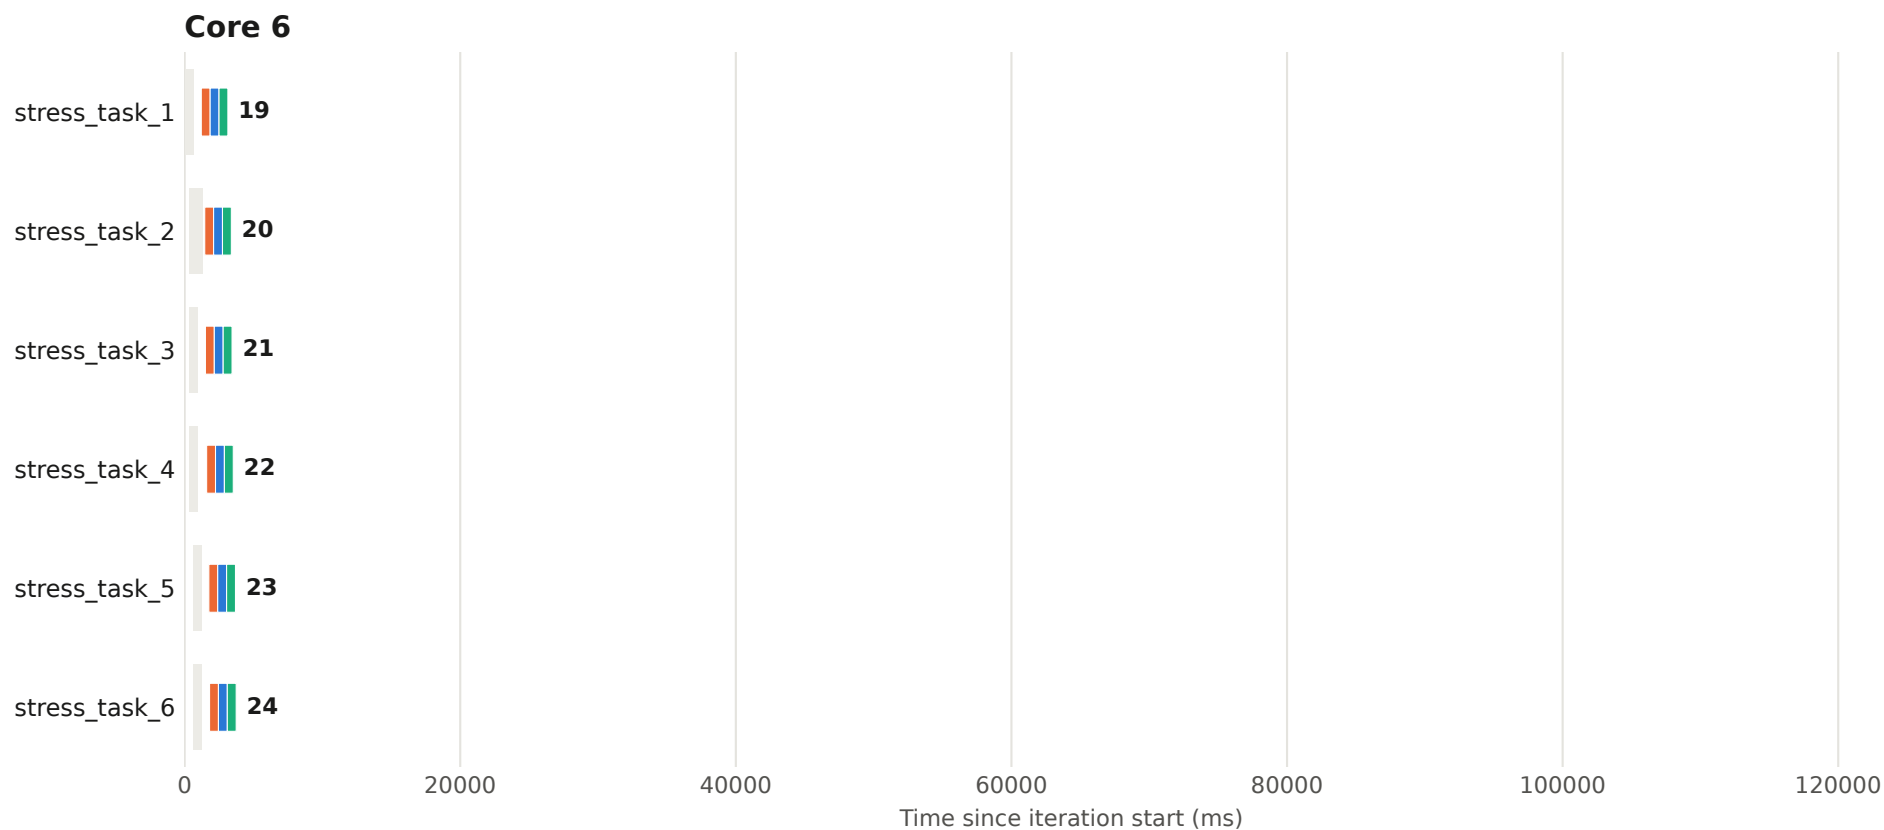


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 10 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

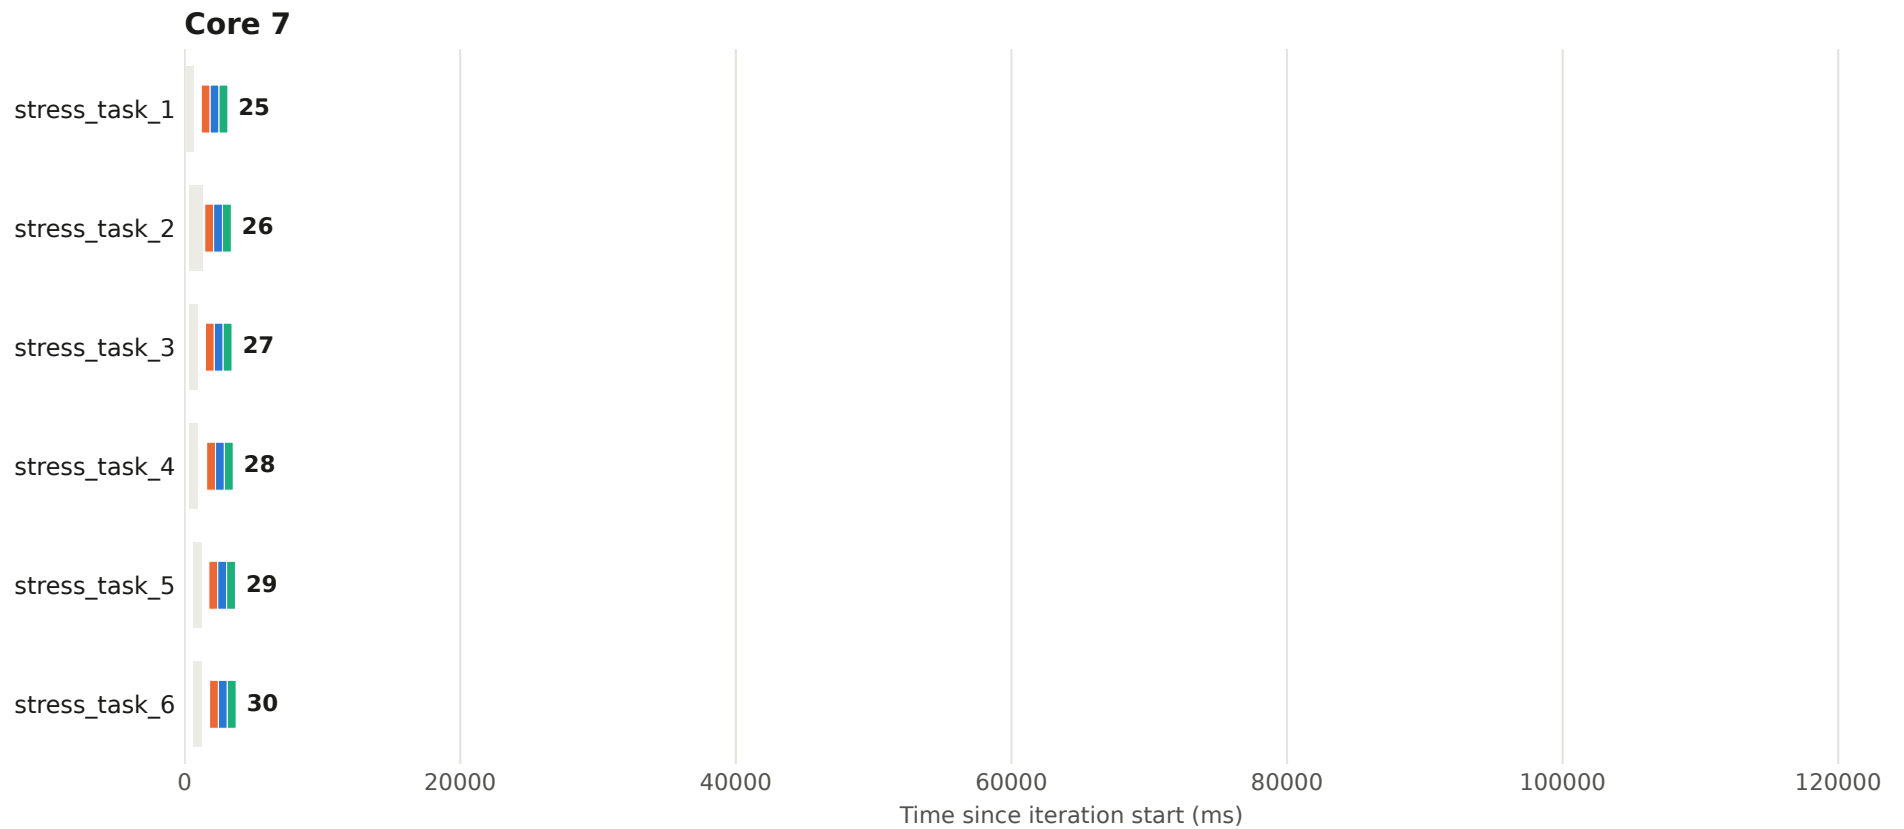


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 11 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

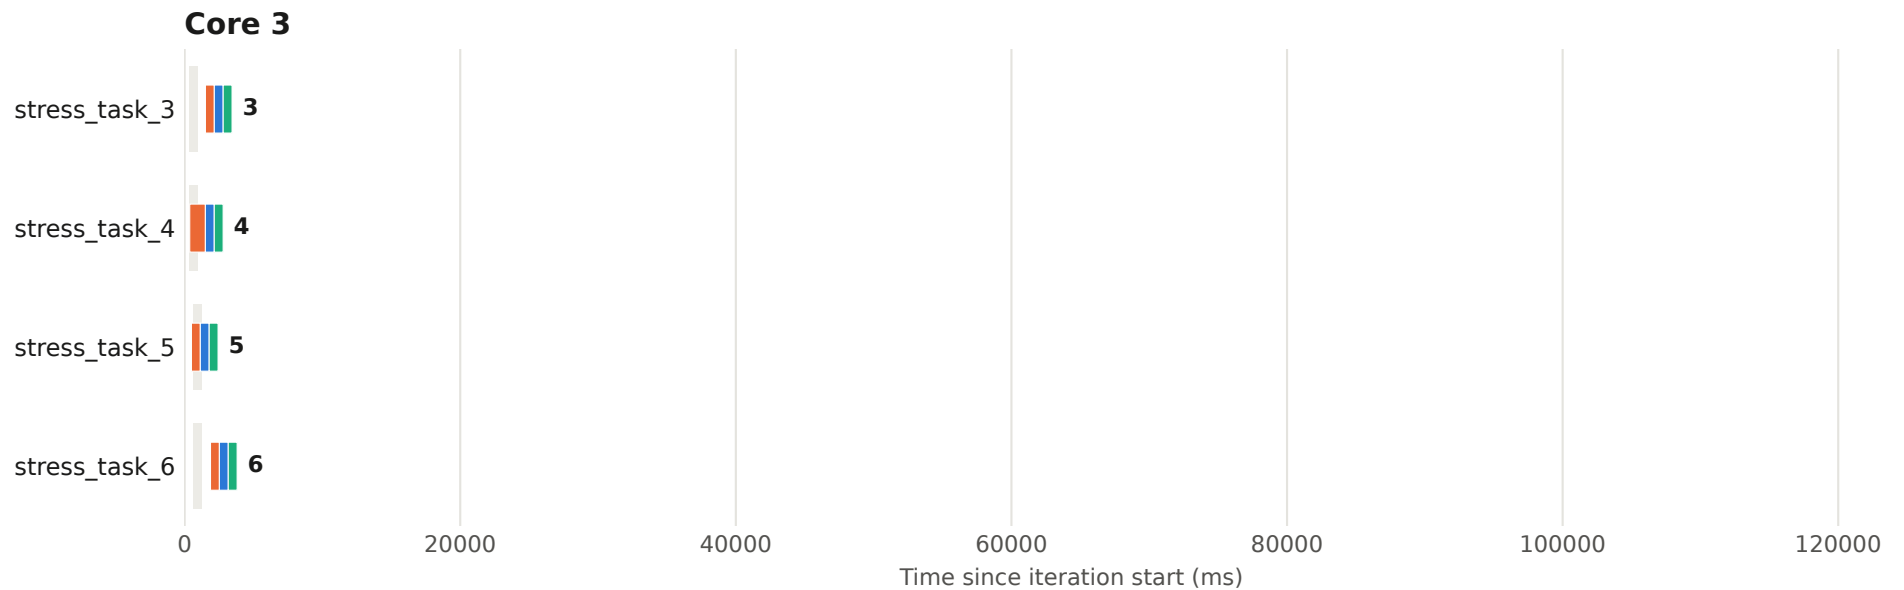

Execution plan - iteration 11 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

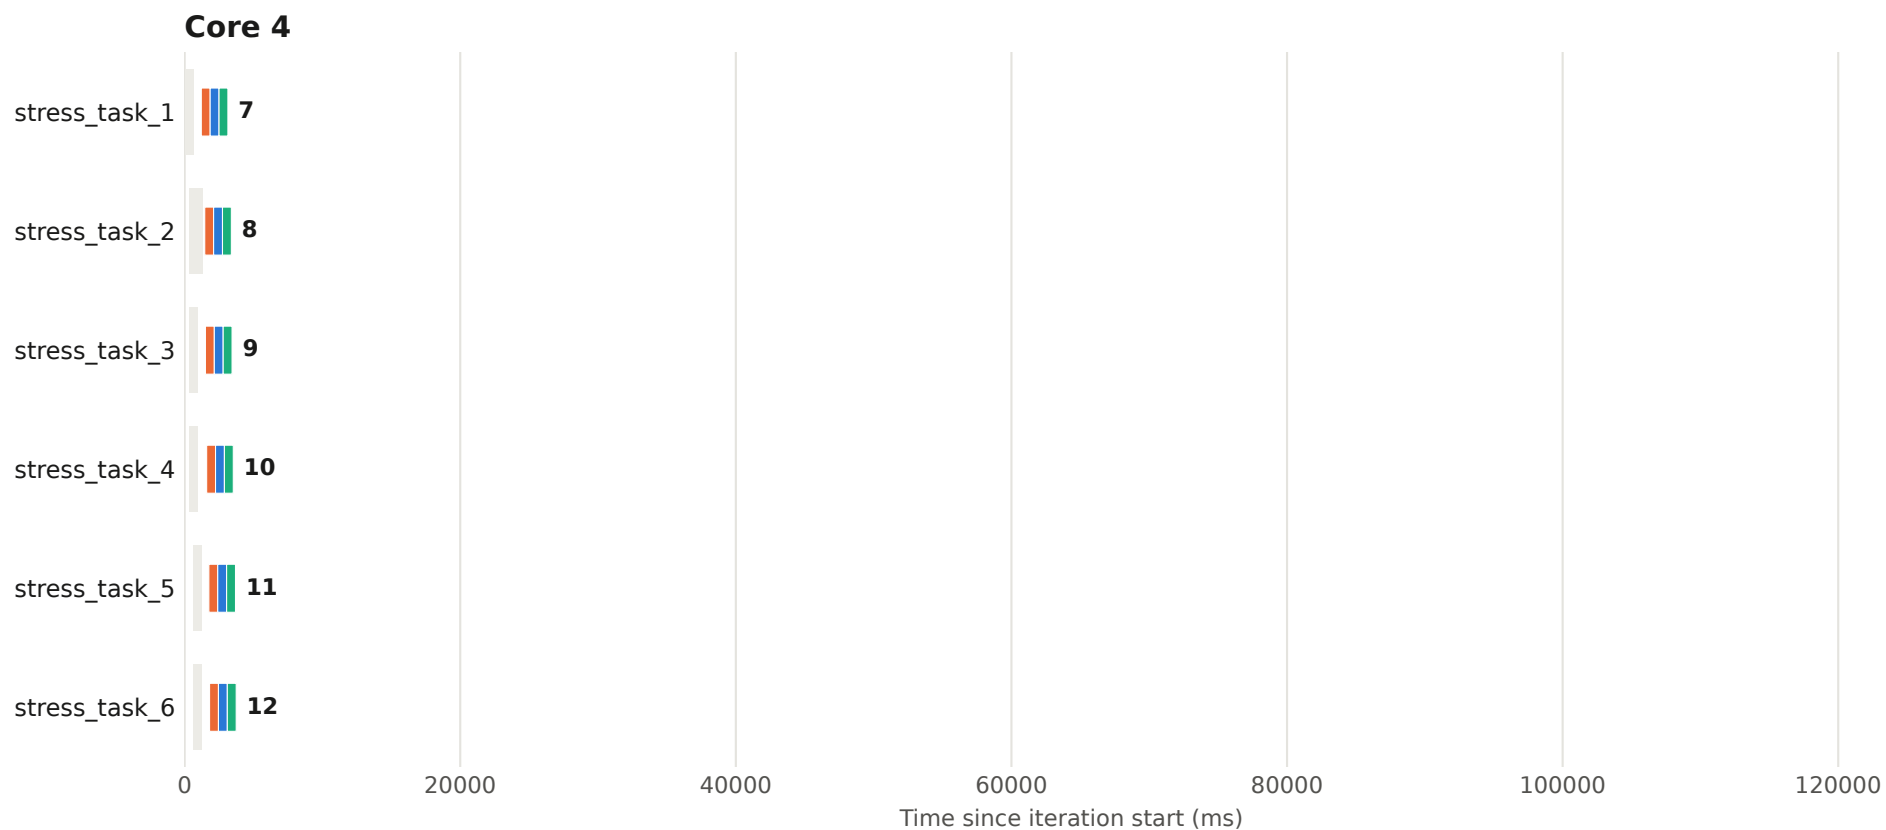


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 11 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

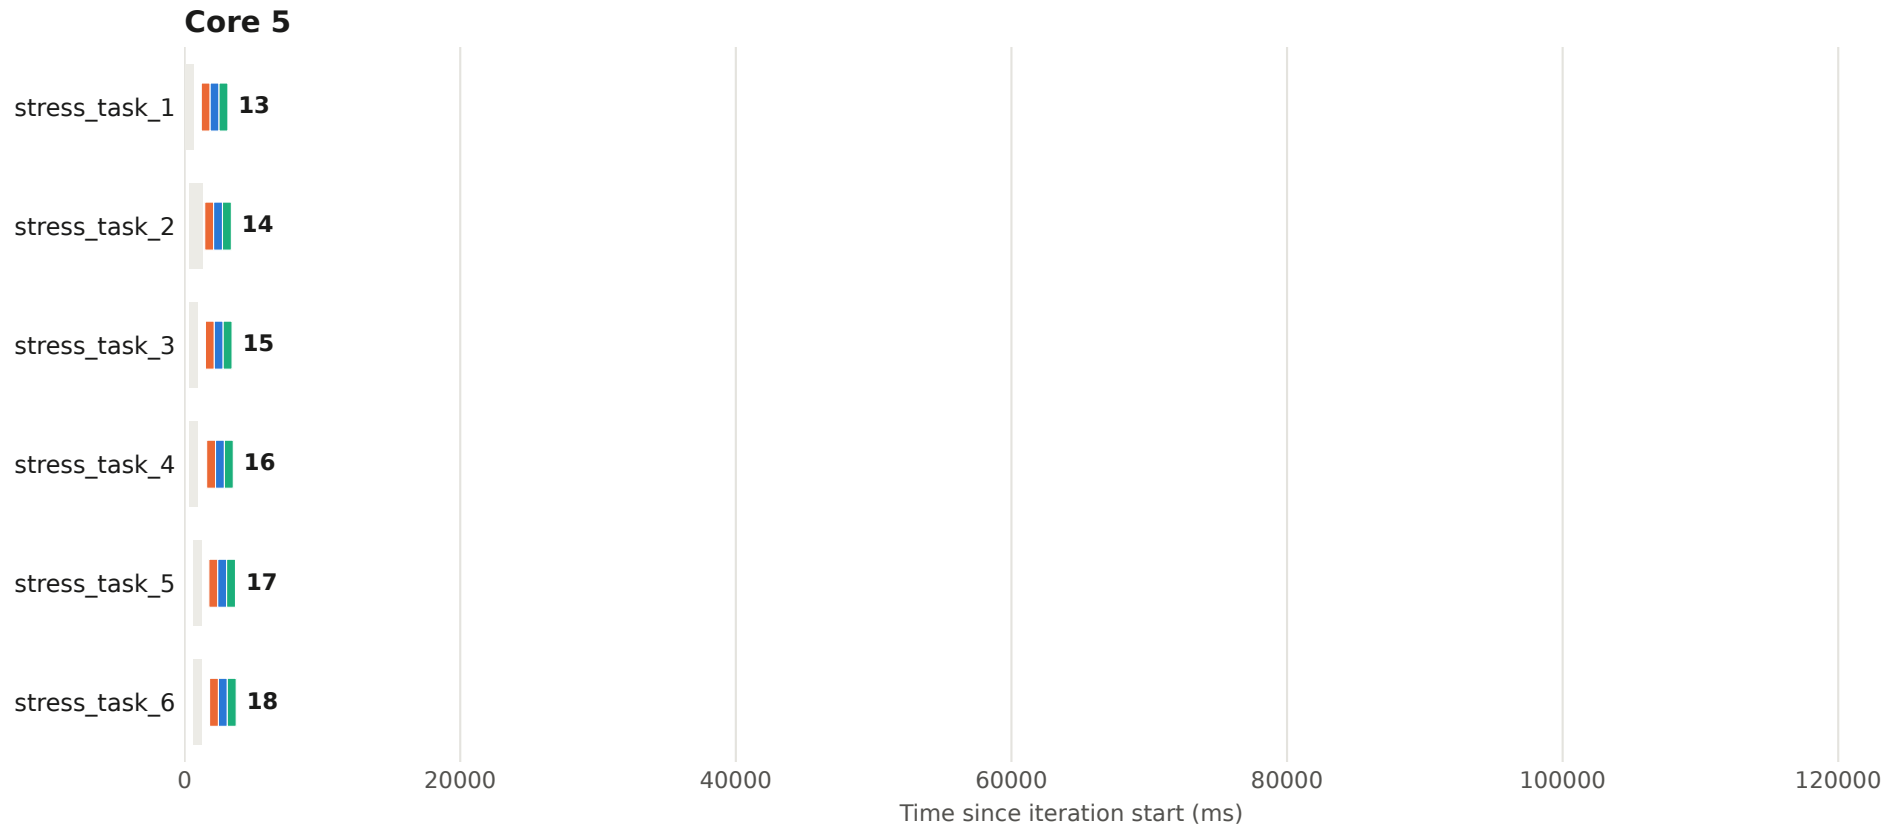


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 11 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

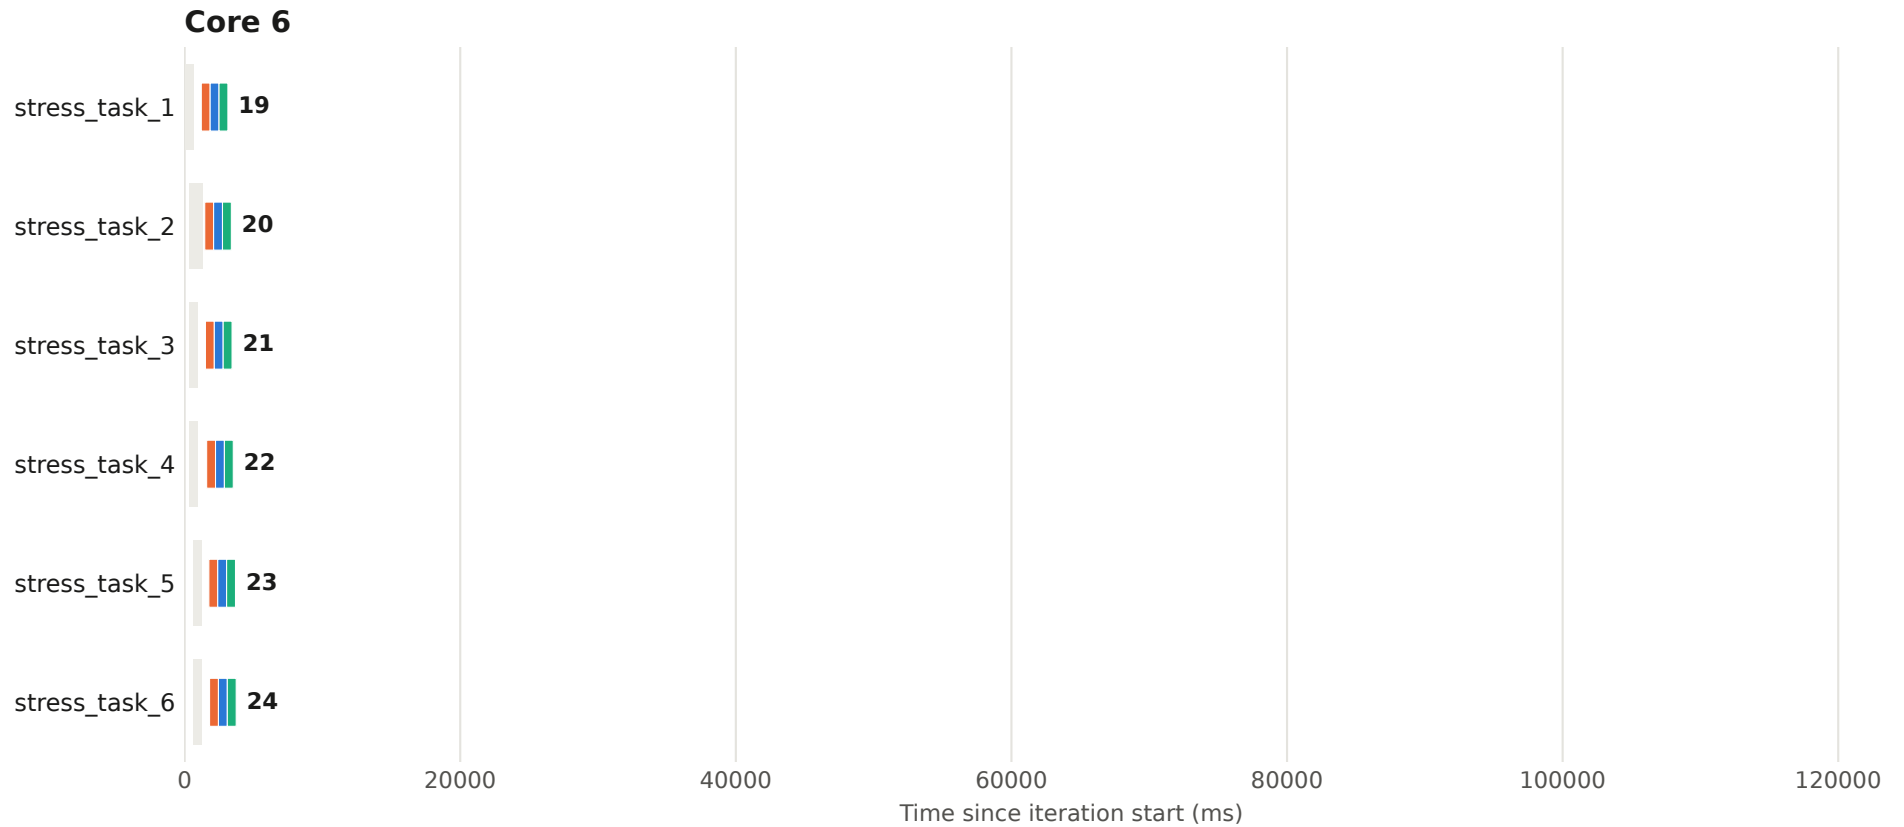


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 11 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

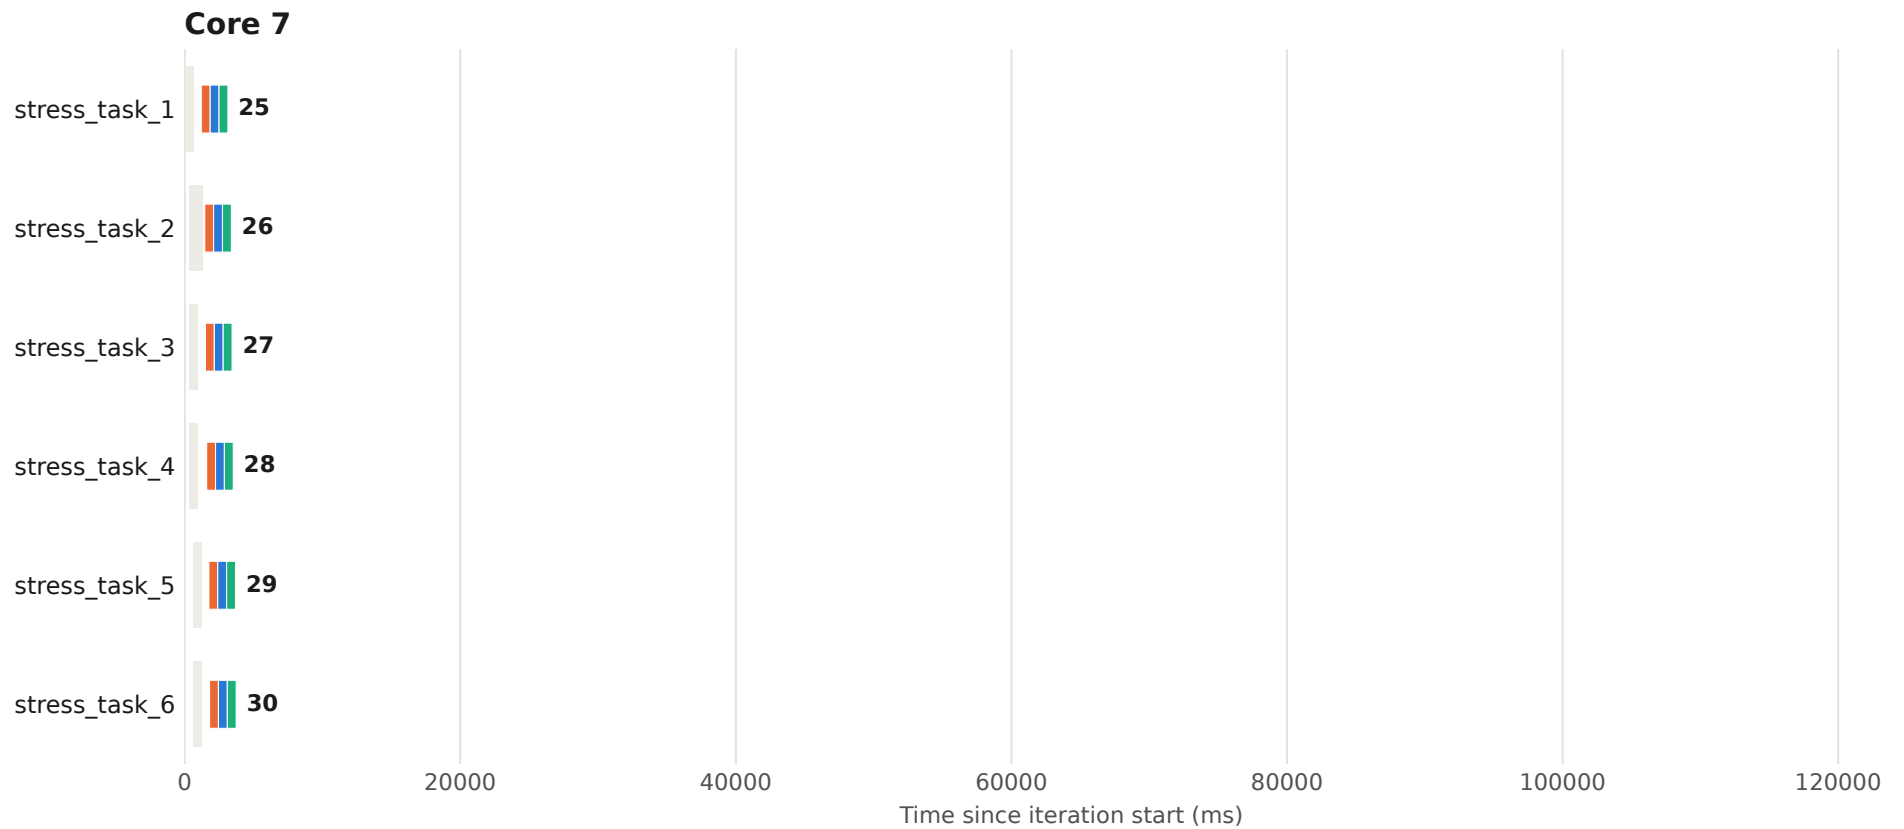


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 12 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

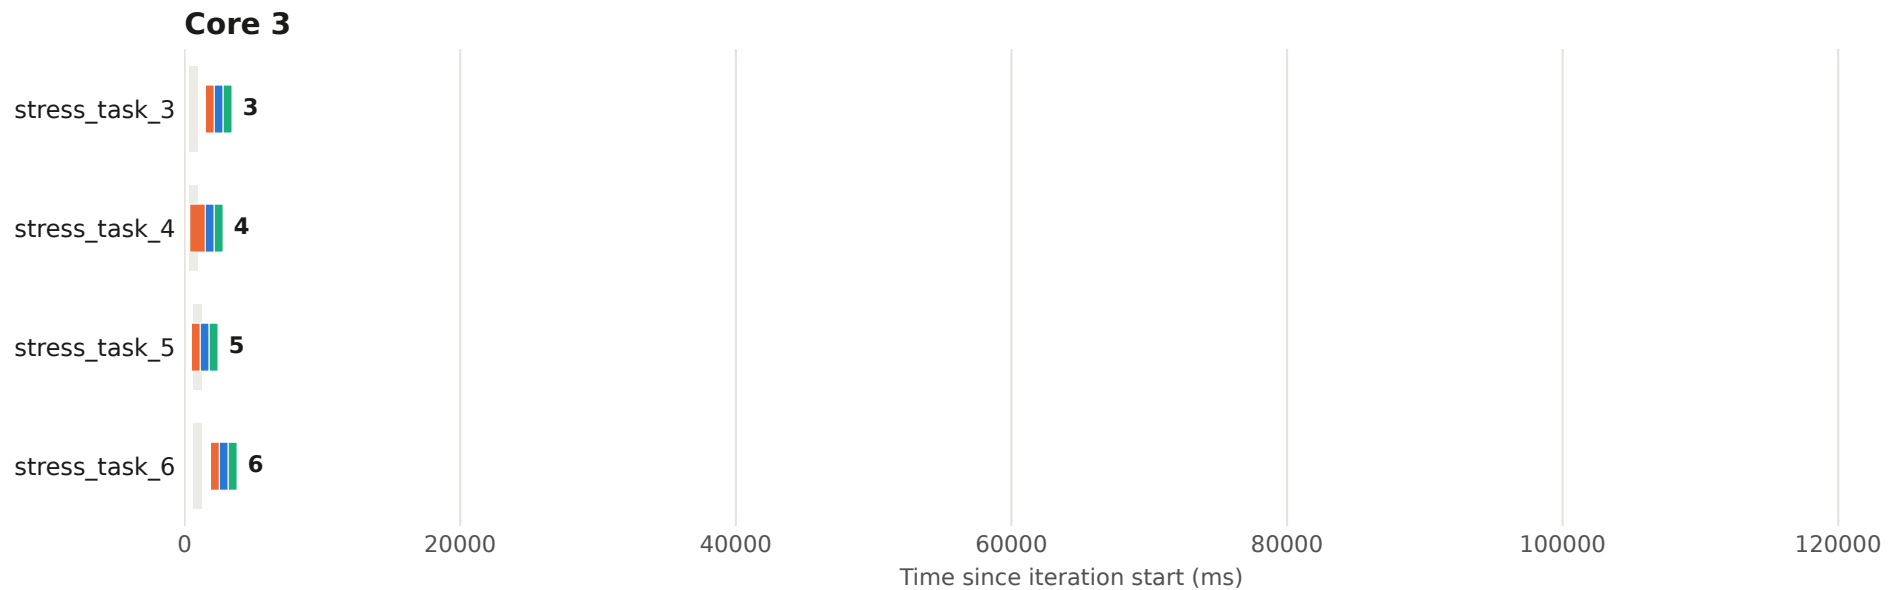


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 12 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

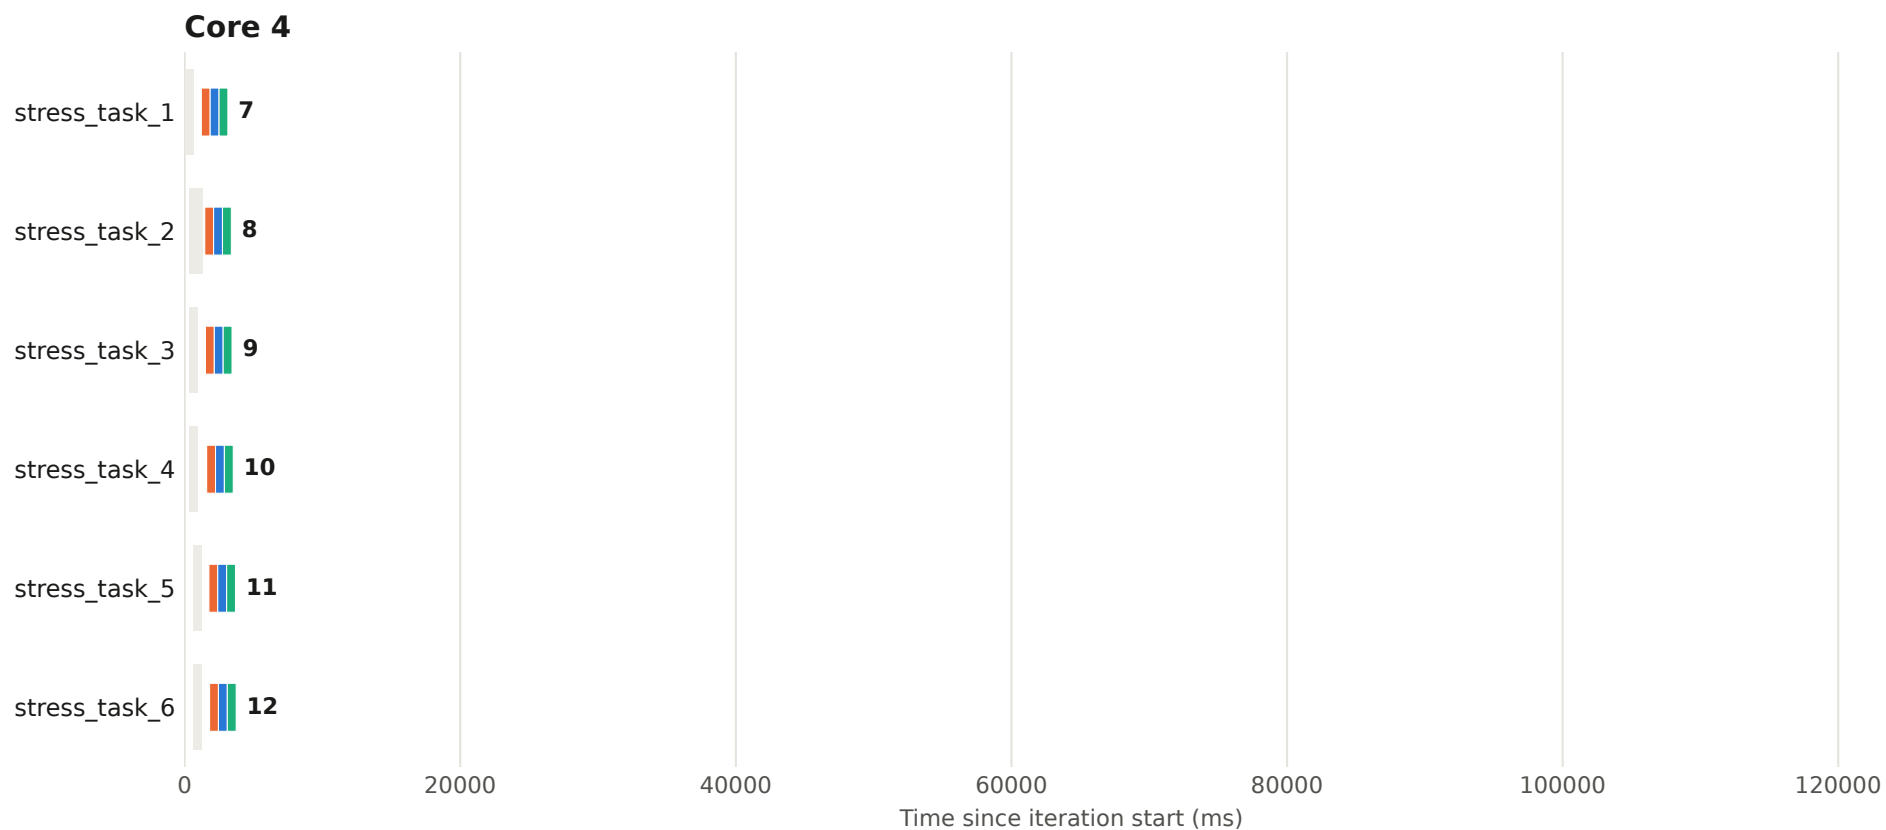


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 12 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

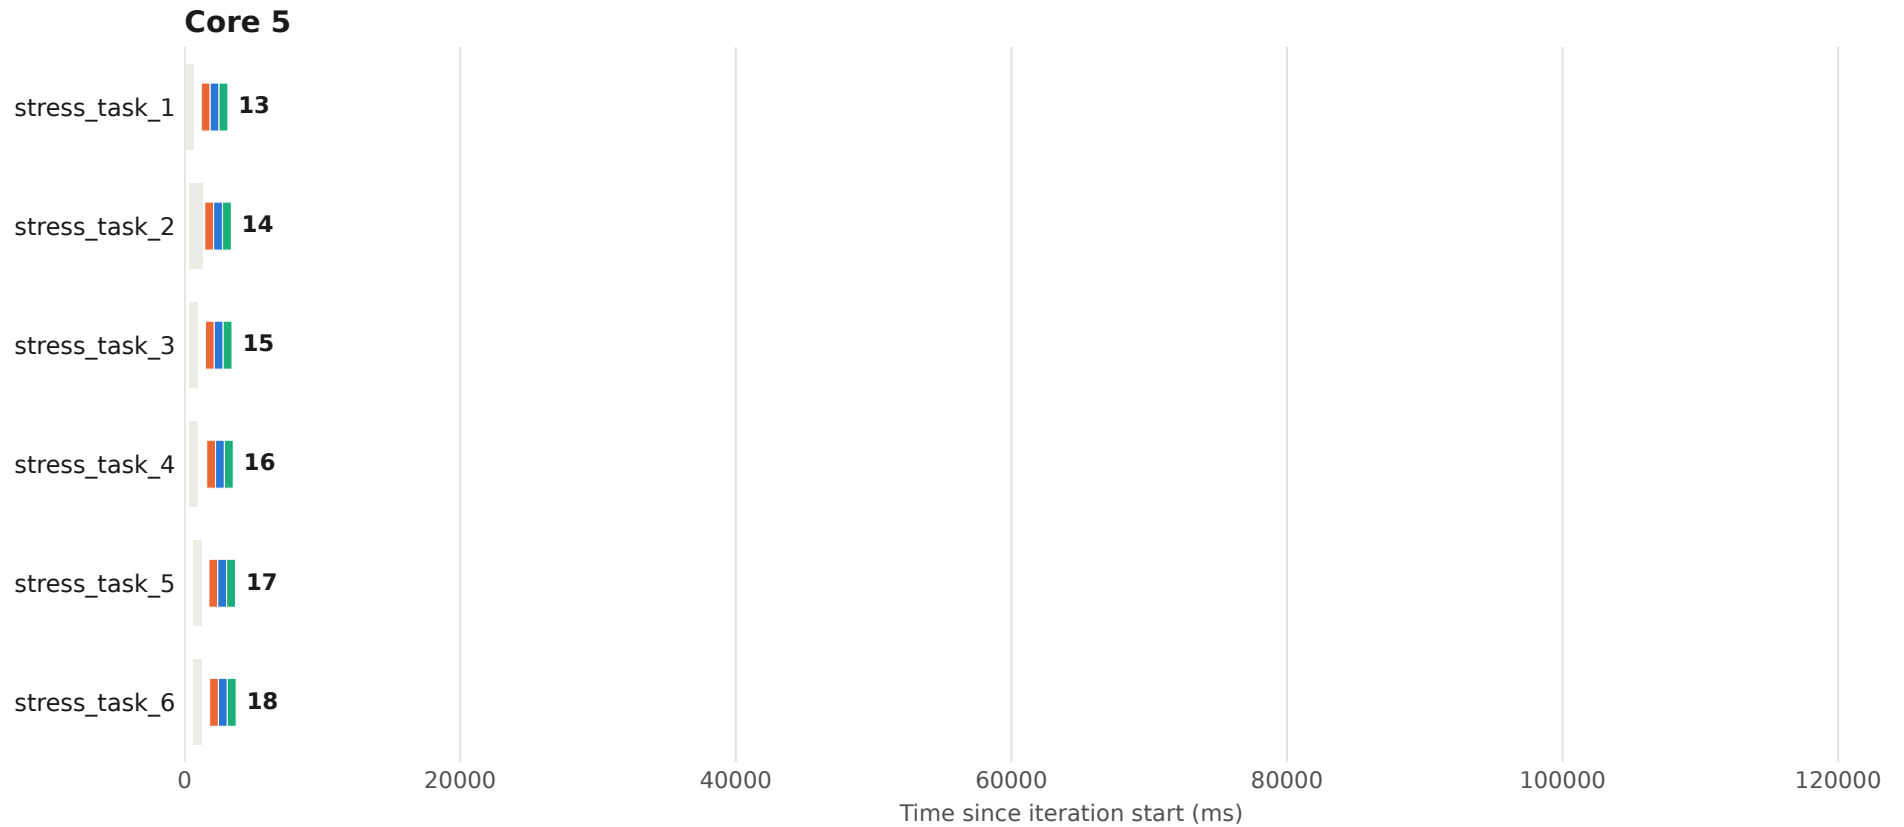


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 12 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

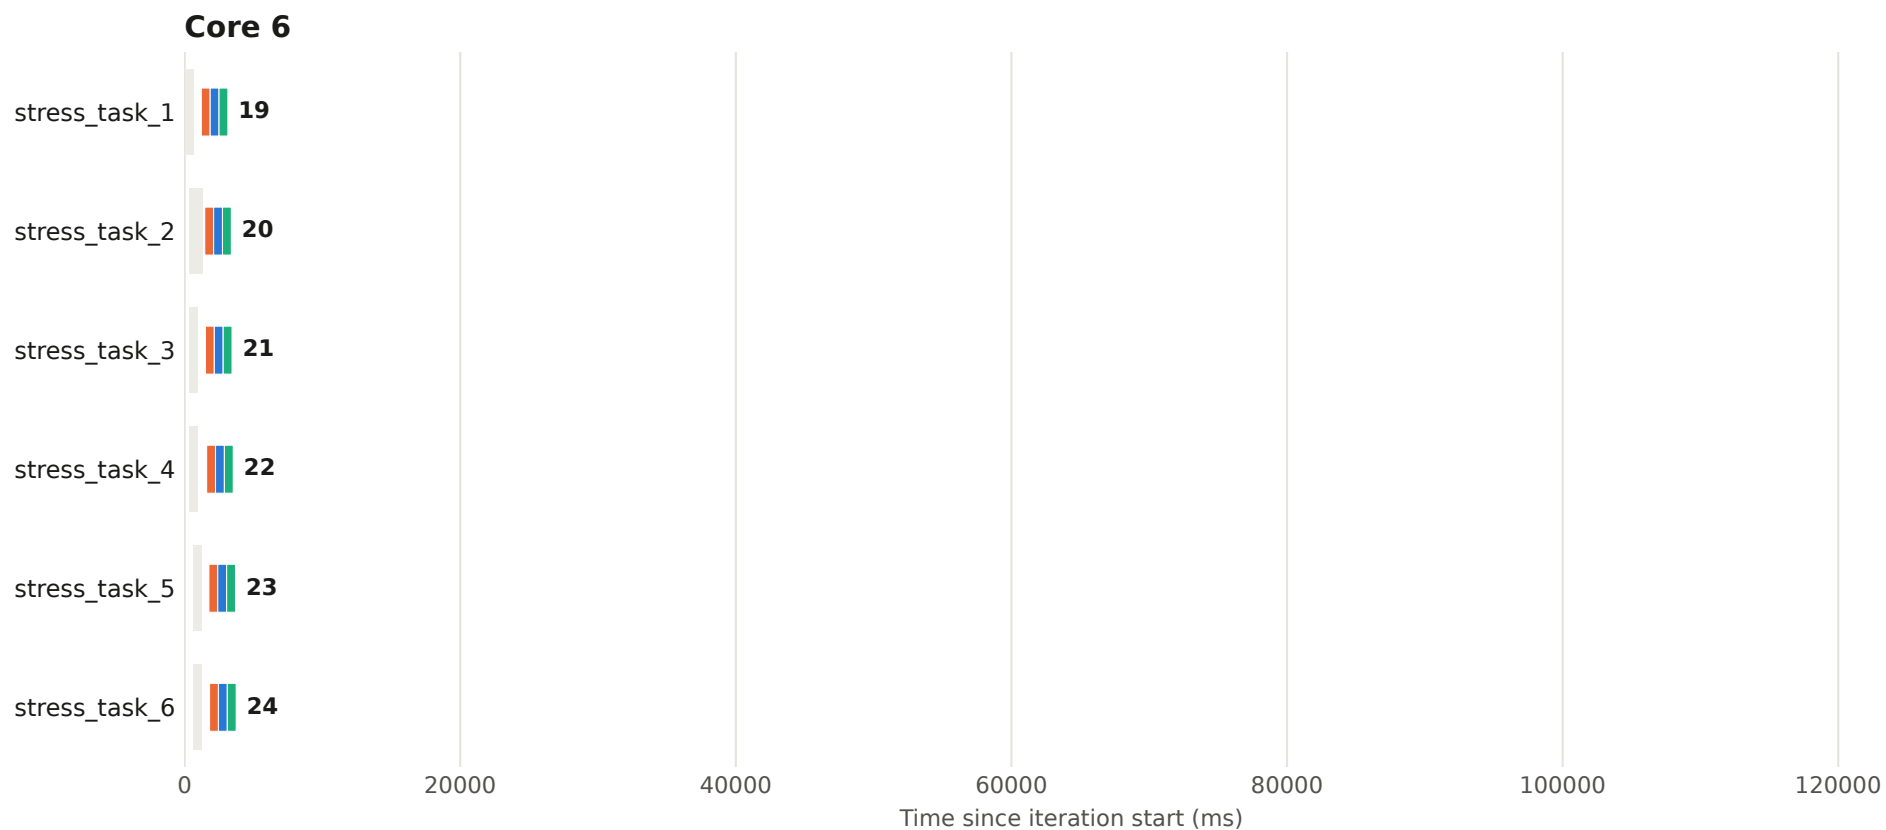


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 12 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

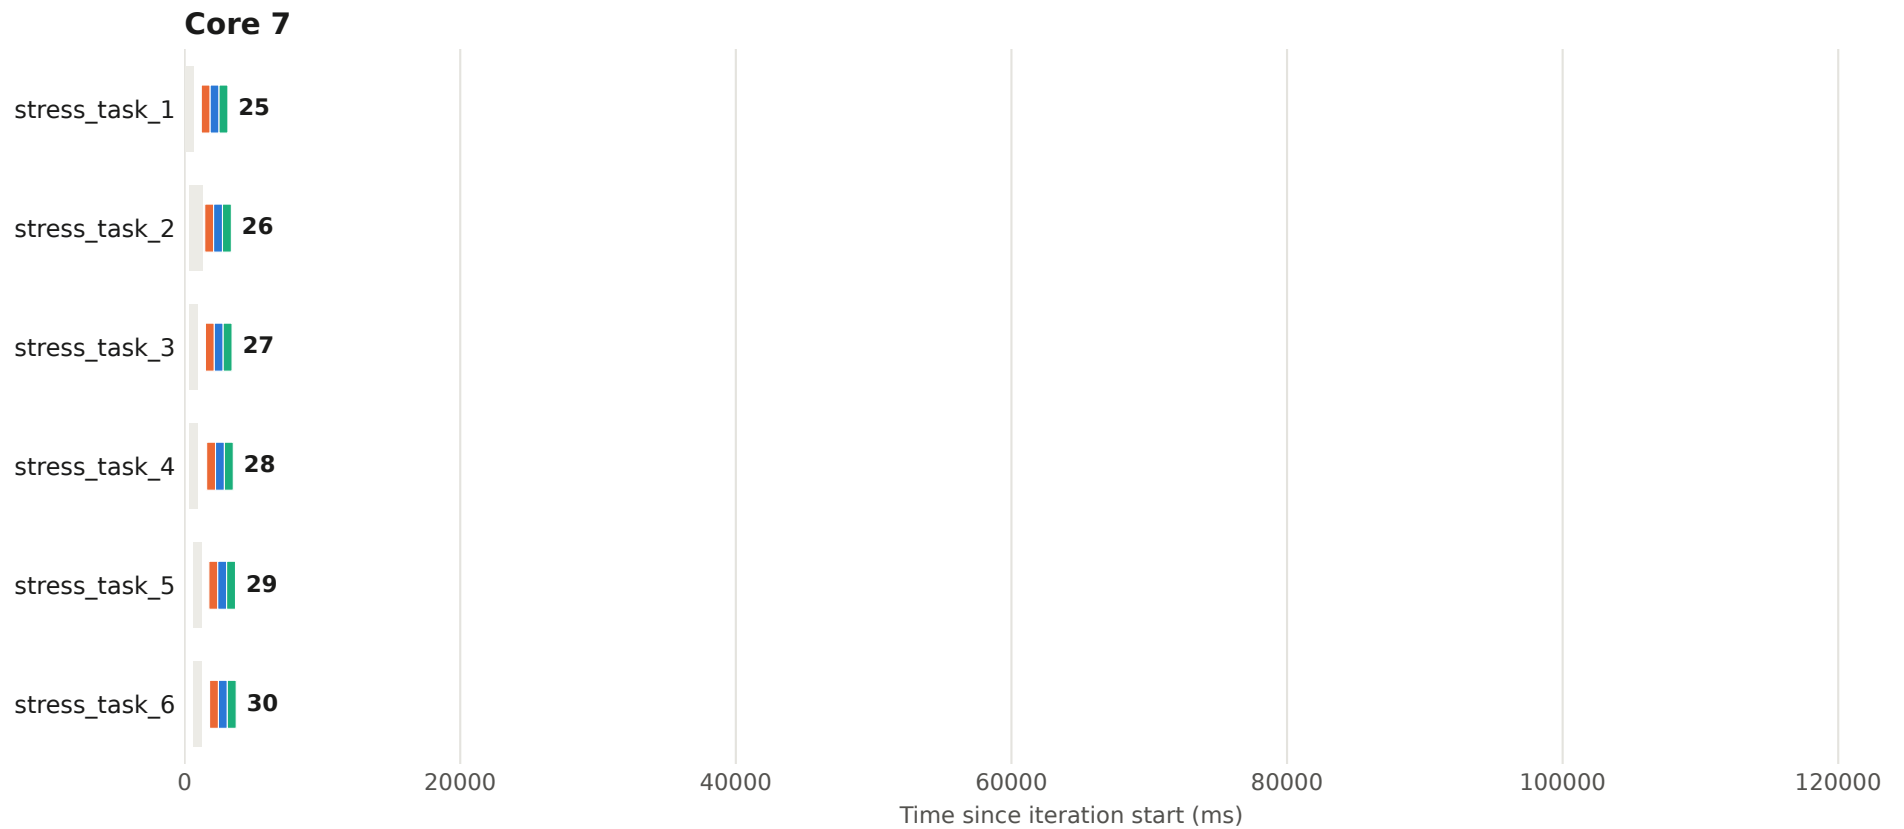


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 13 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

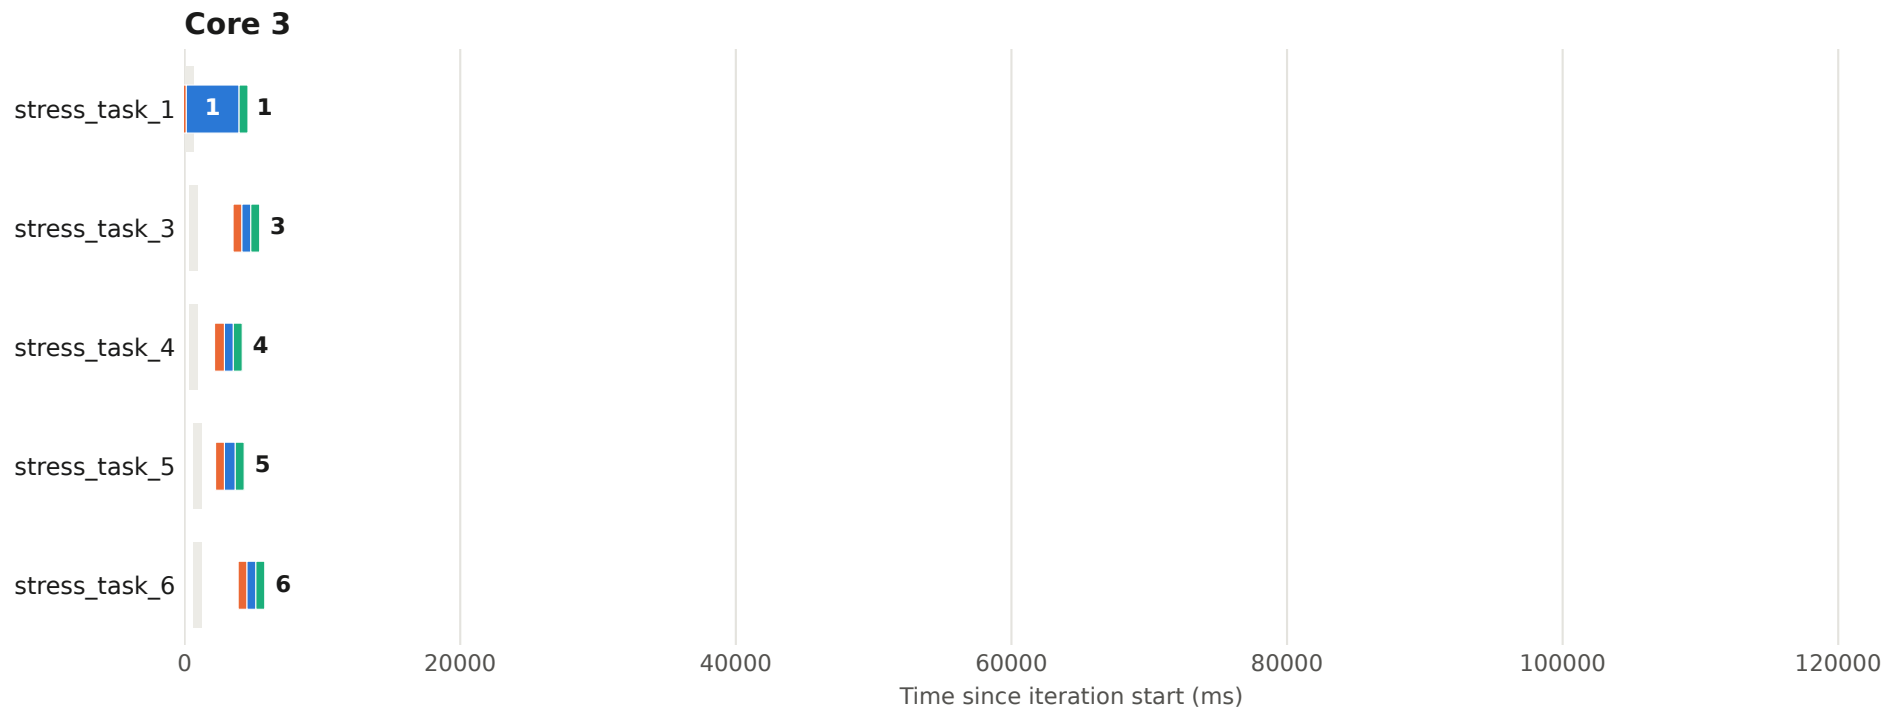


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 13 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

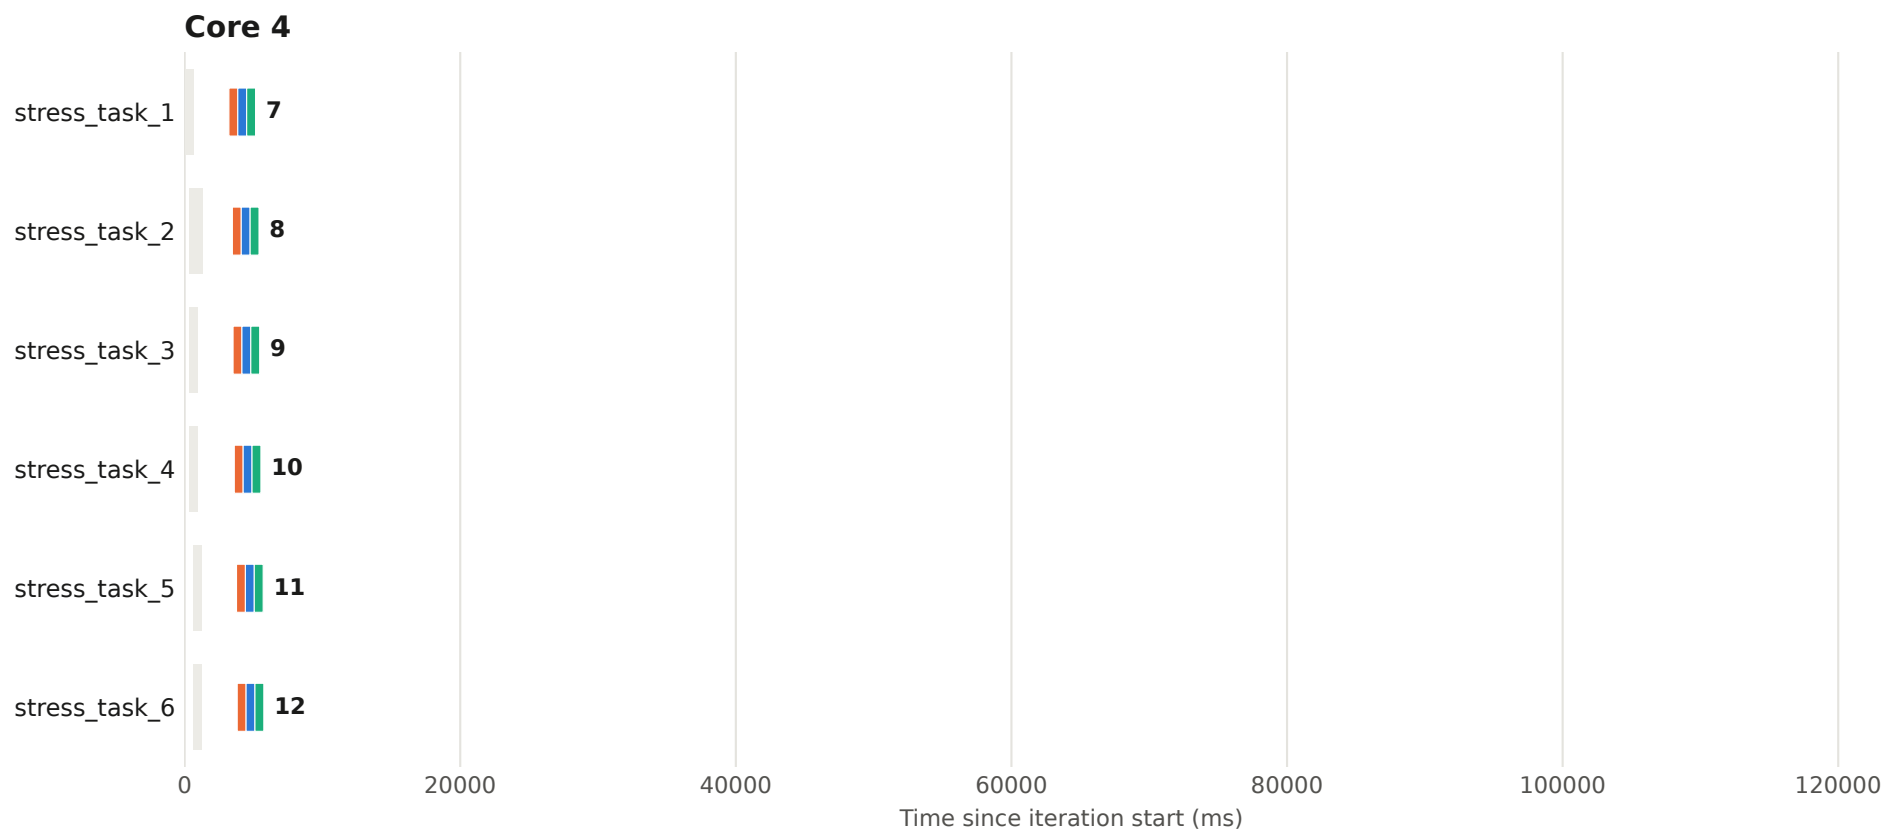


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 13 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

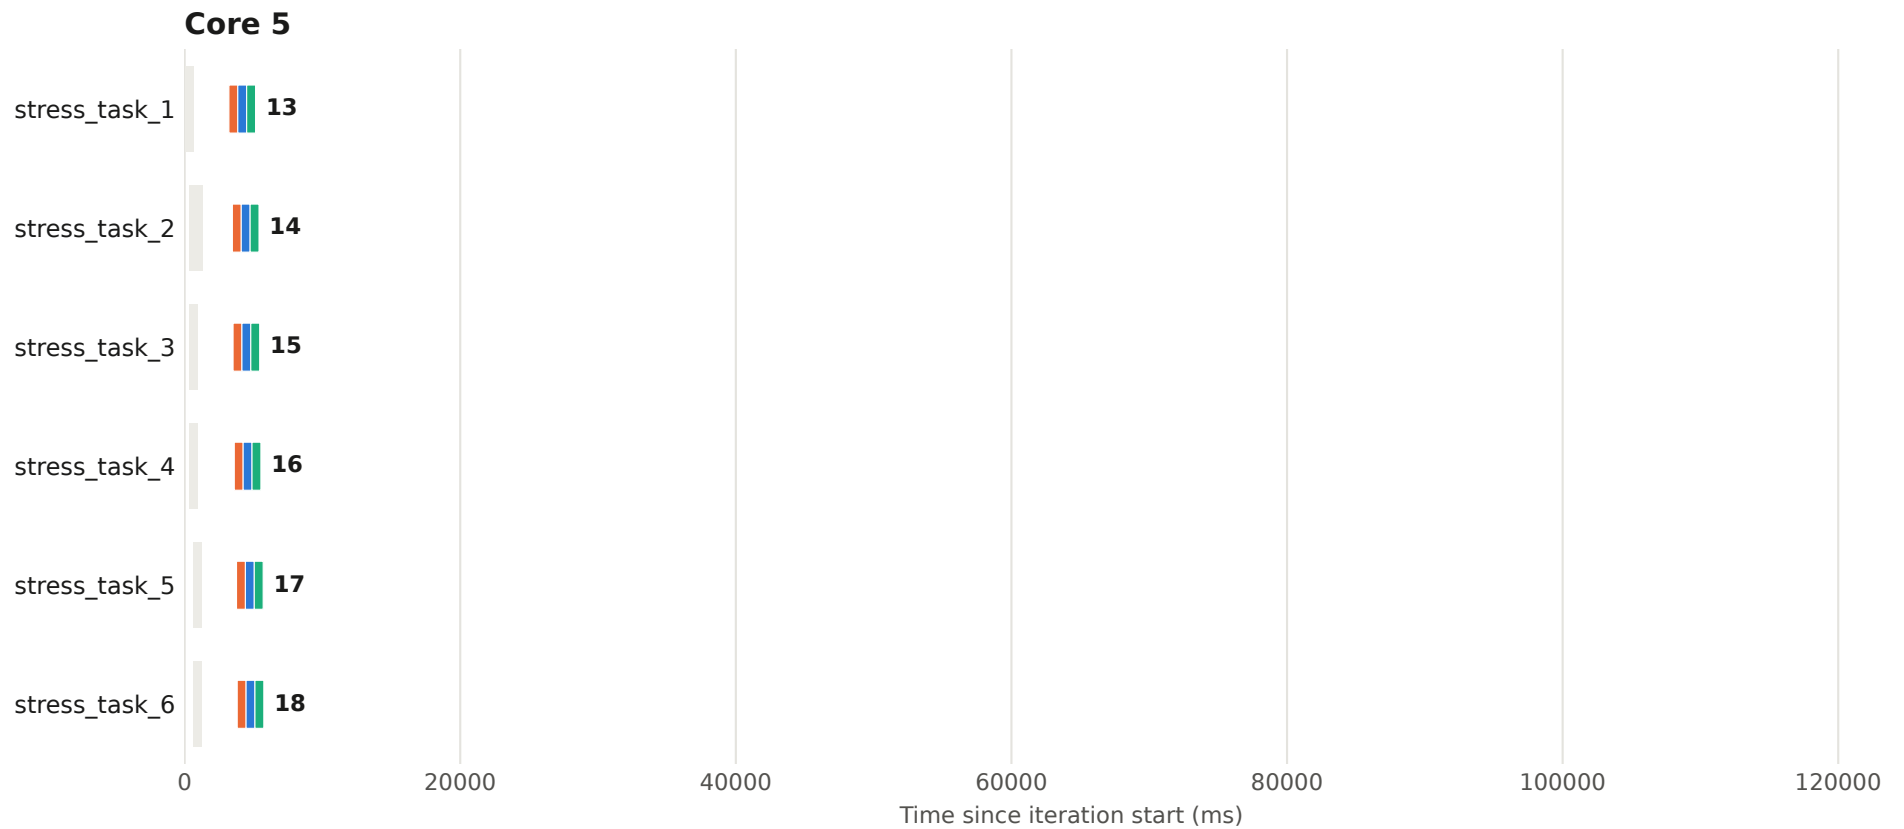


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 13 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

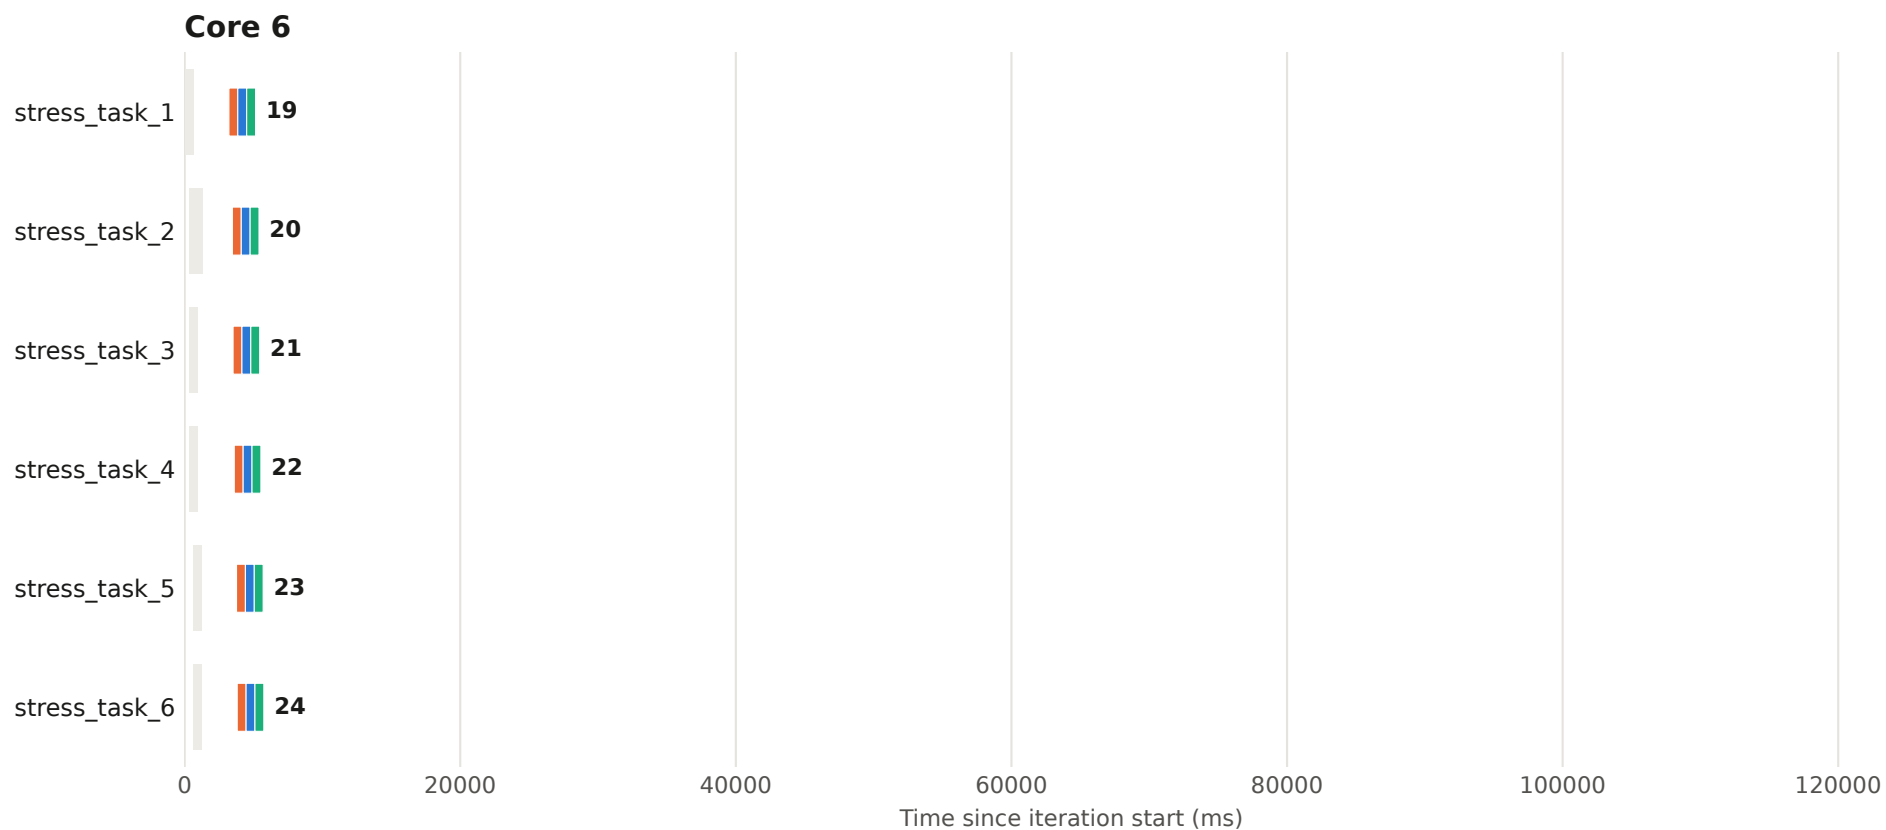


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 13 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

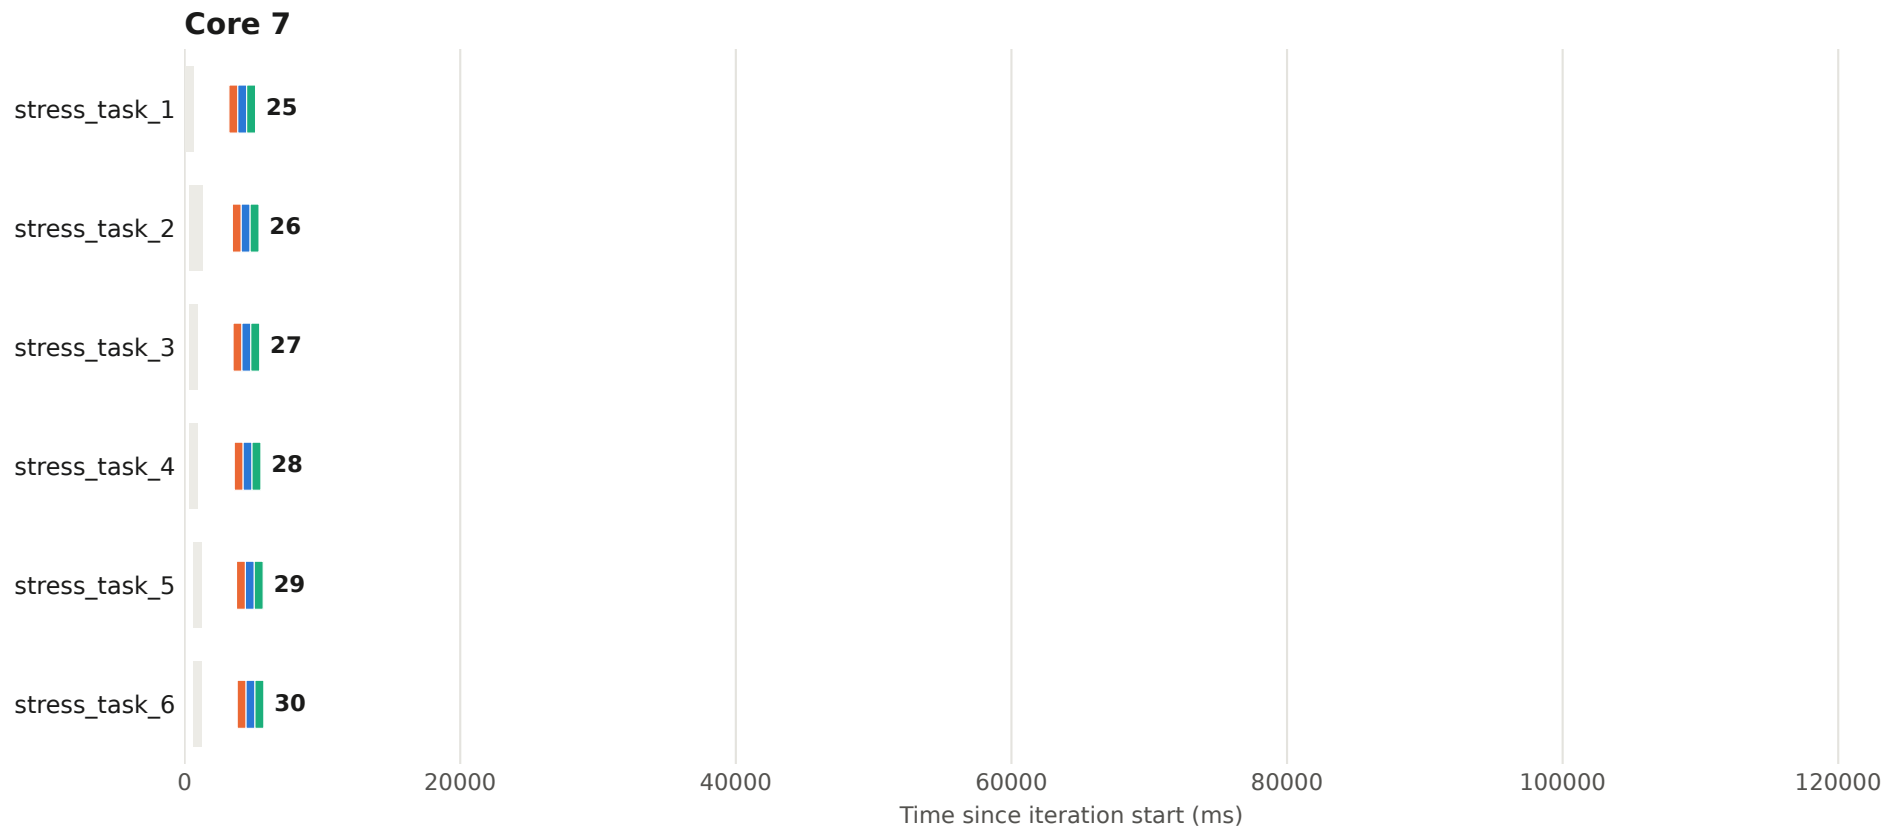


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 14 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

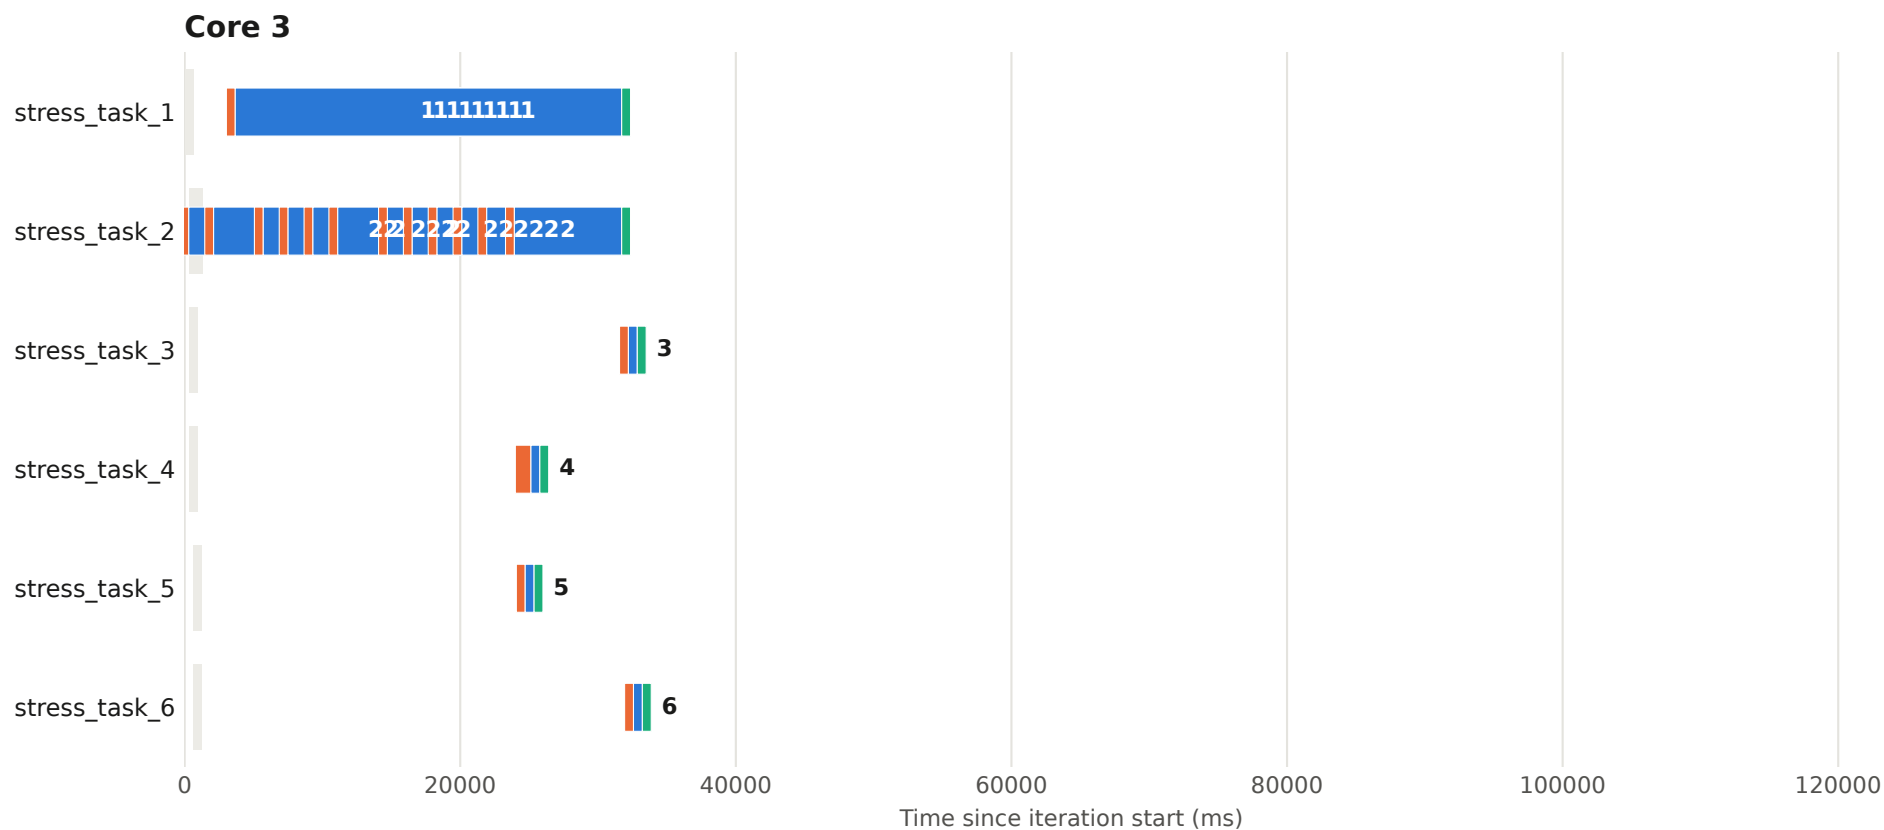


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 14 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

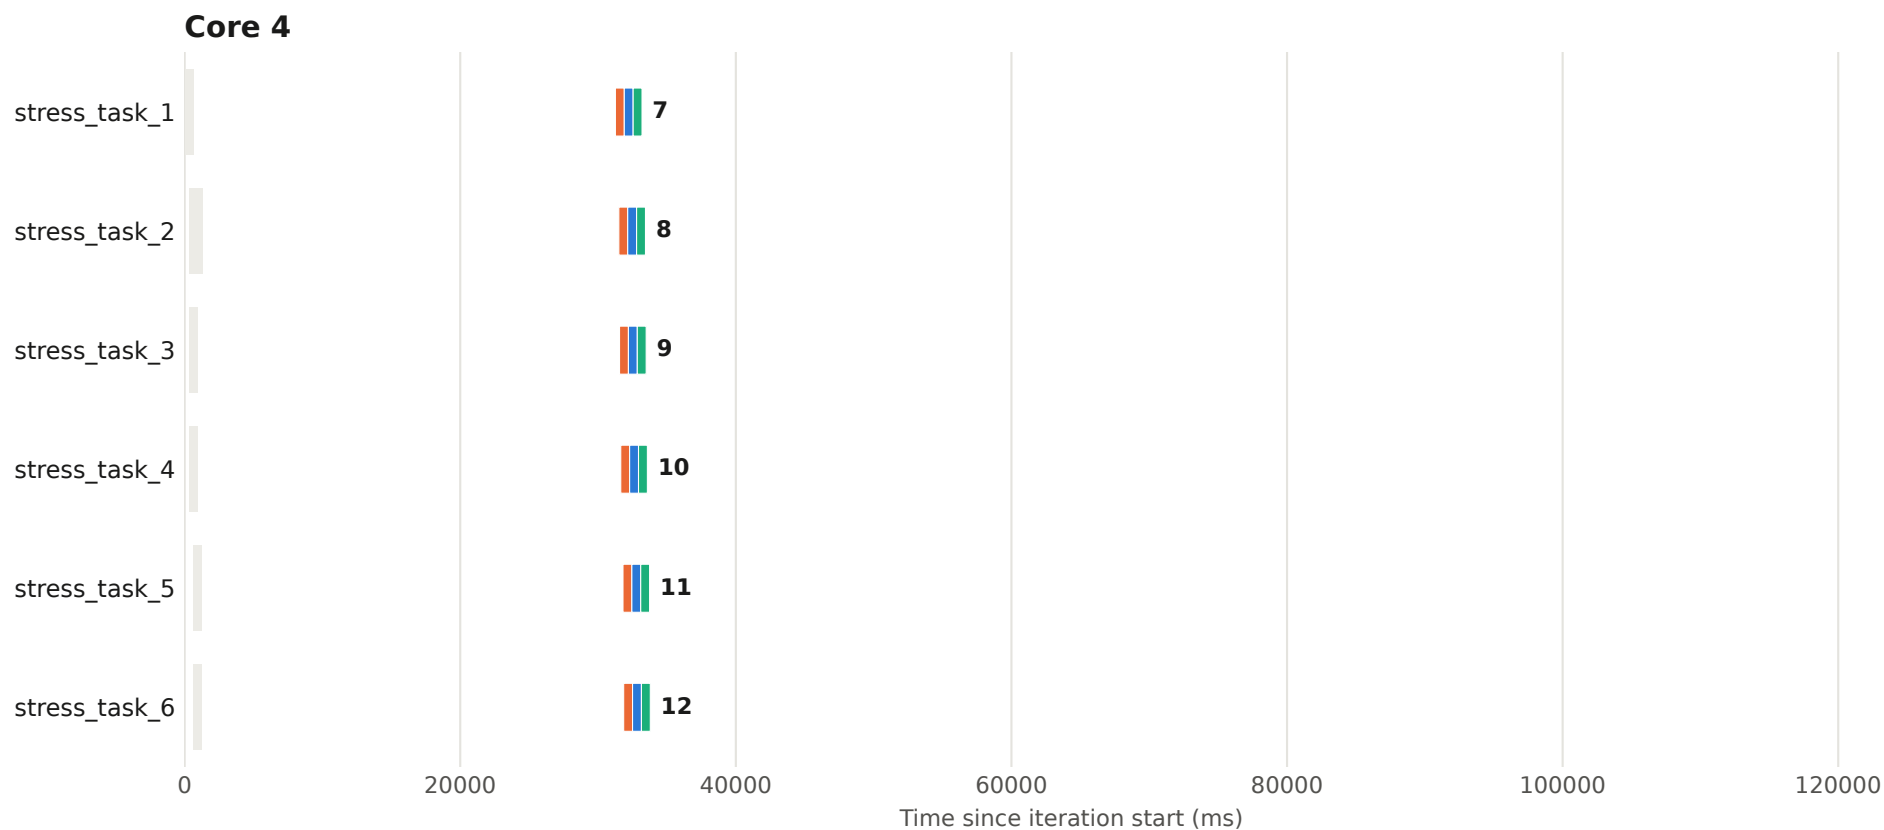


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 14 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

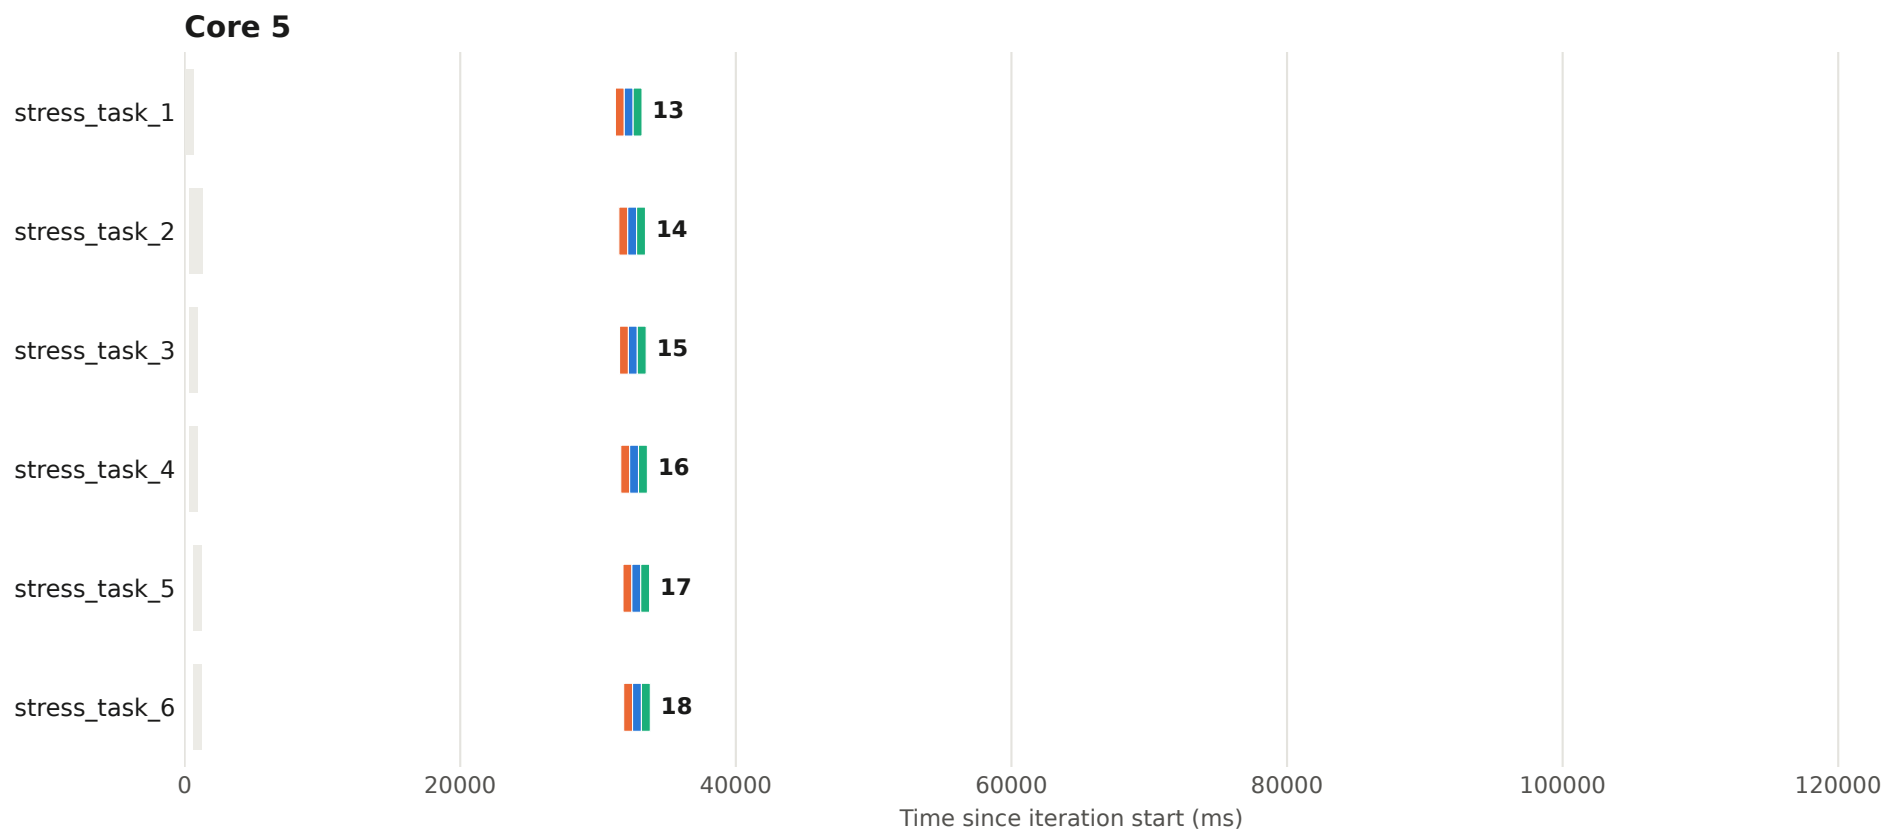


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 14 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

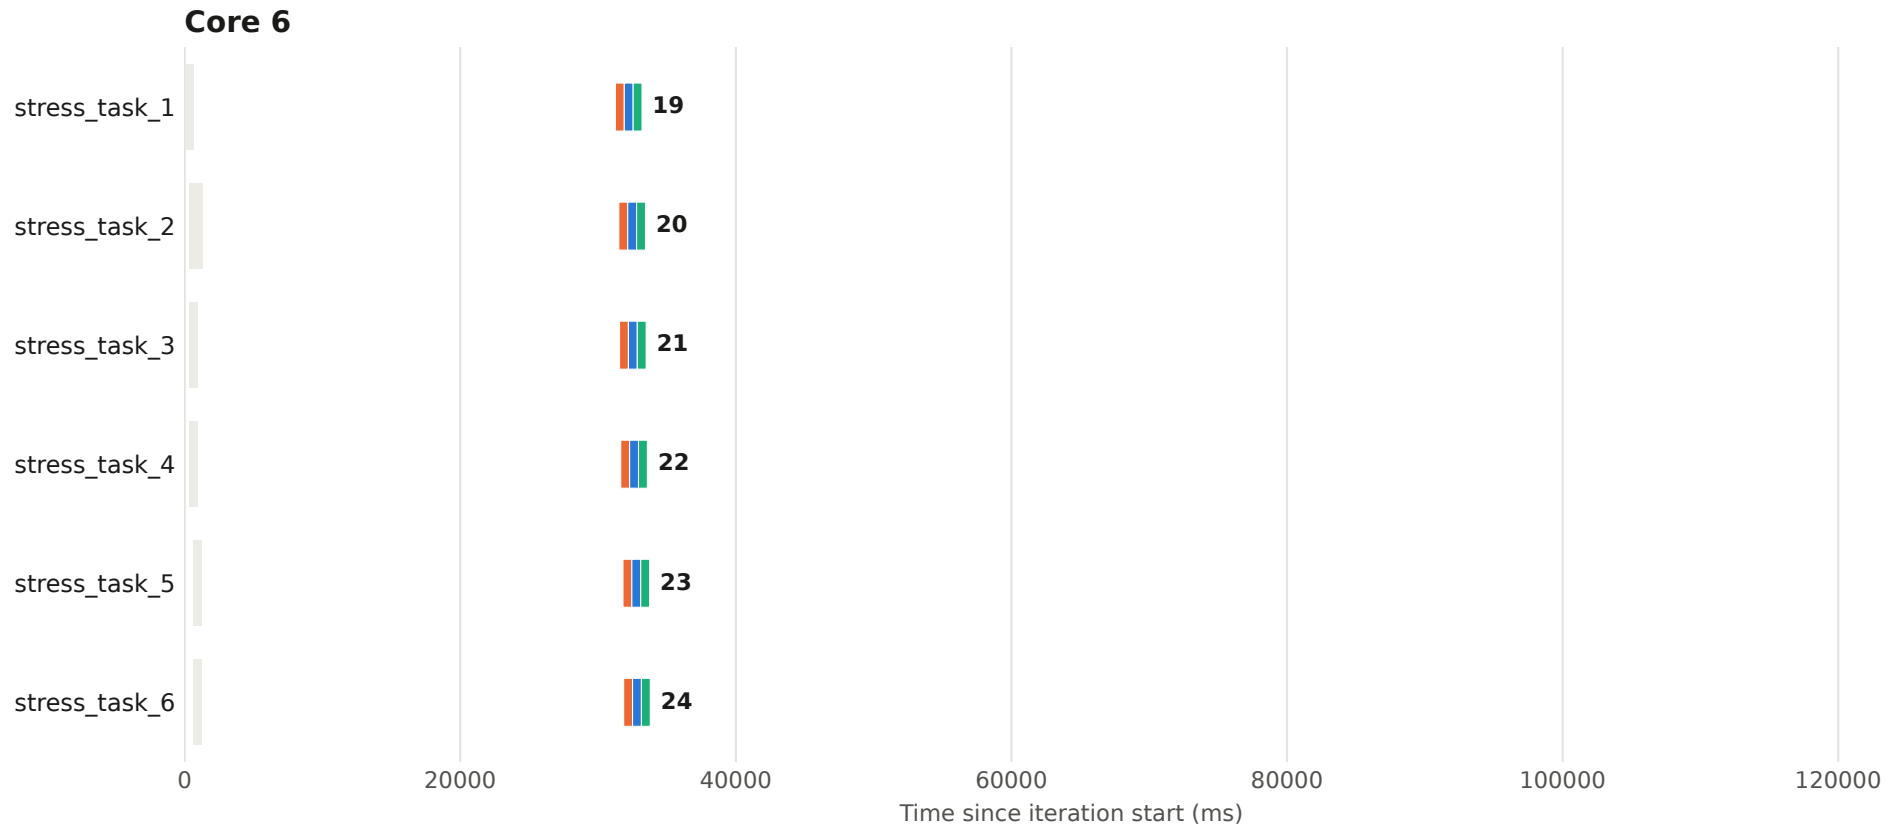


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 14 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

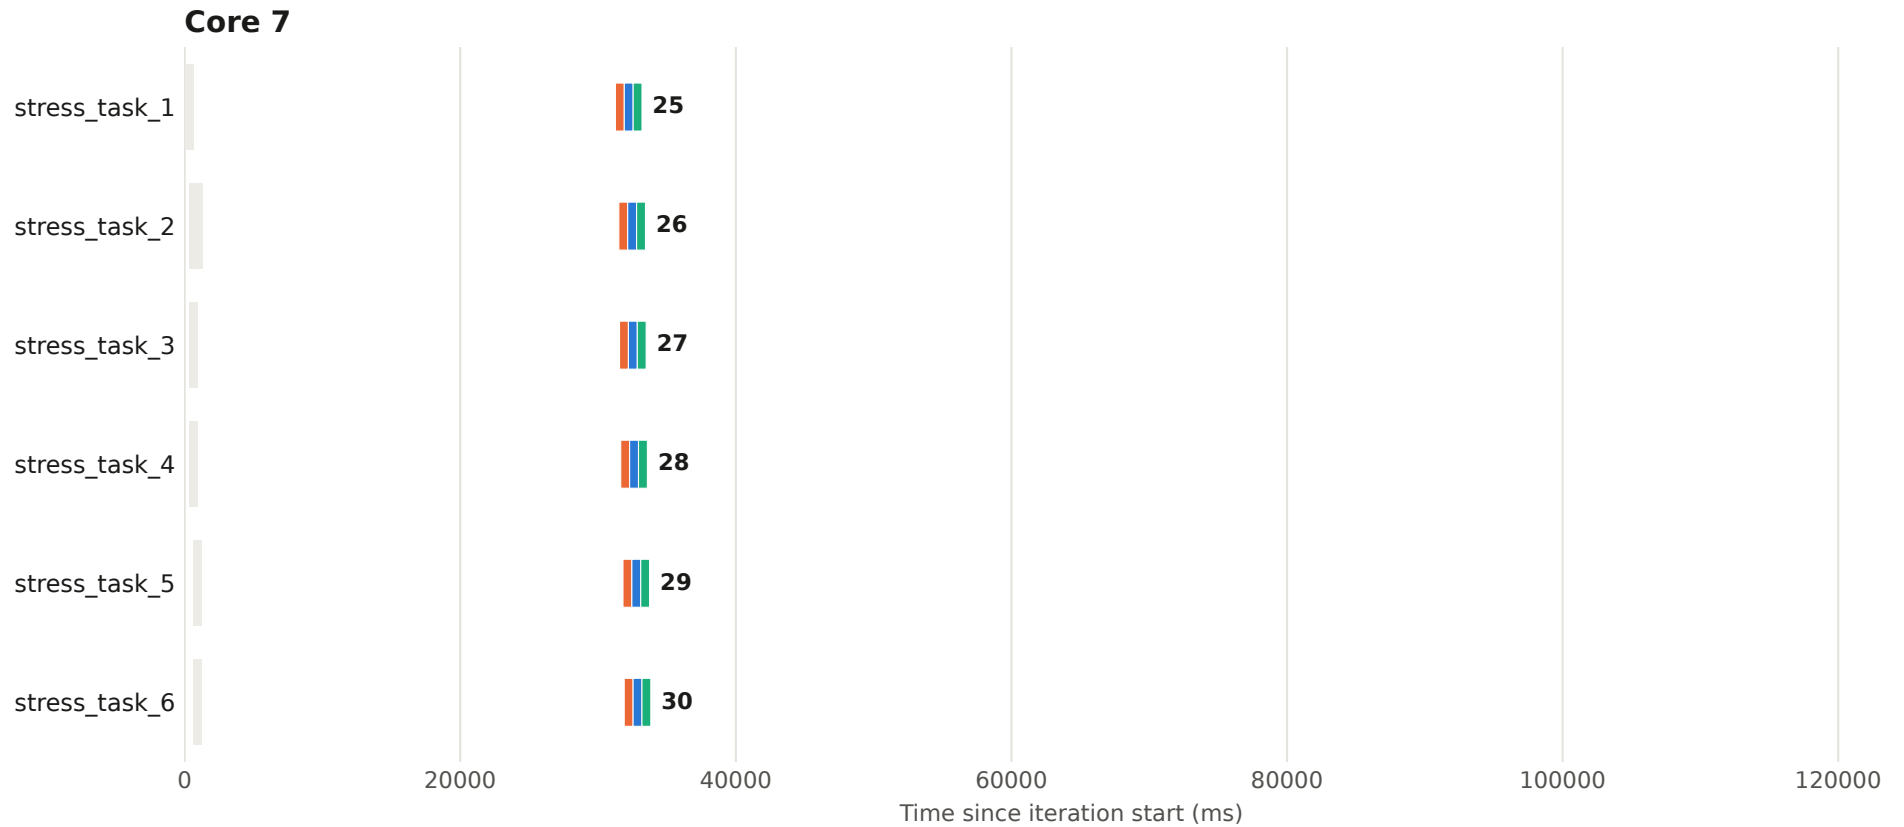


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 15 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

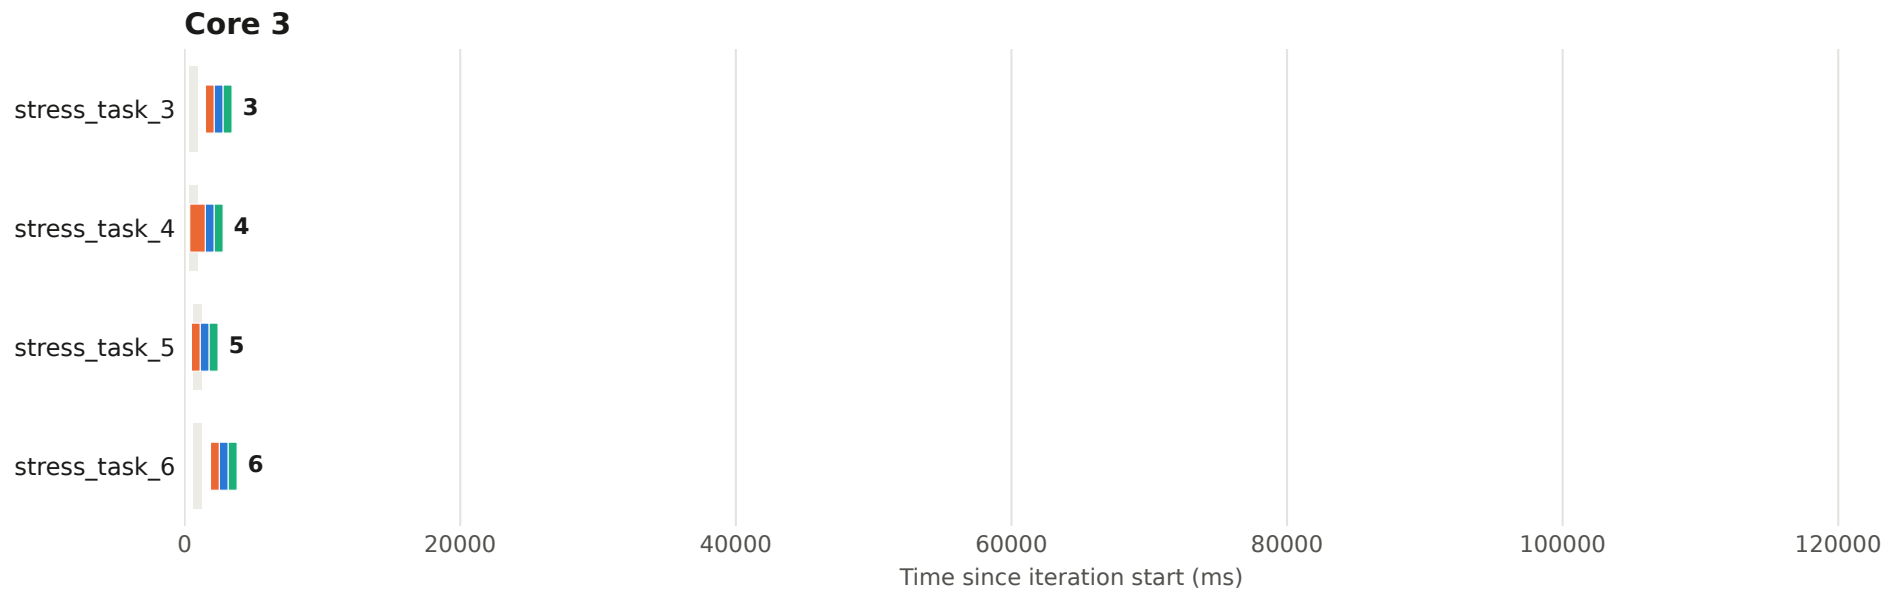

Execution plan - iteration 15 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

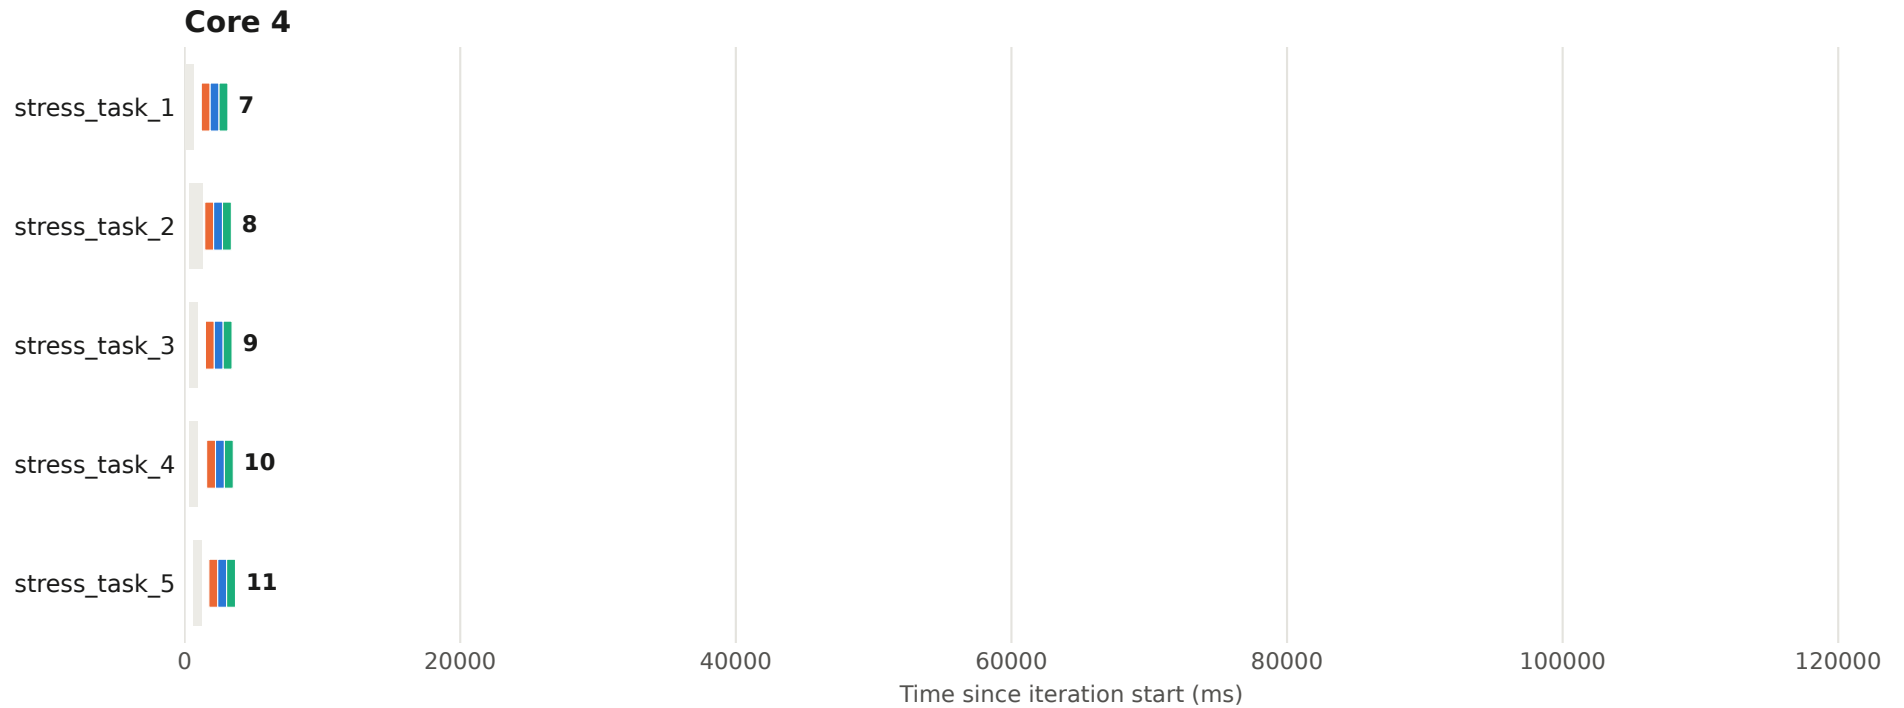


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 15 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

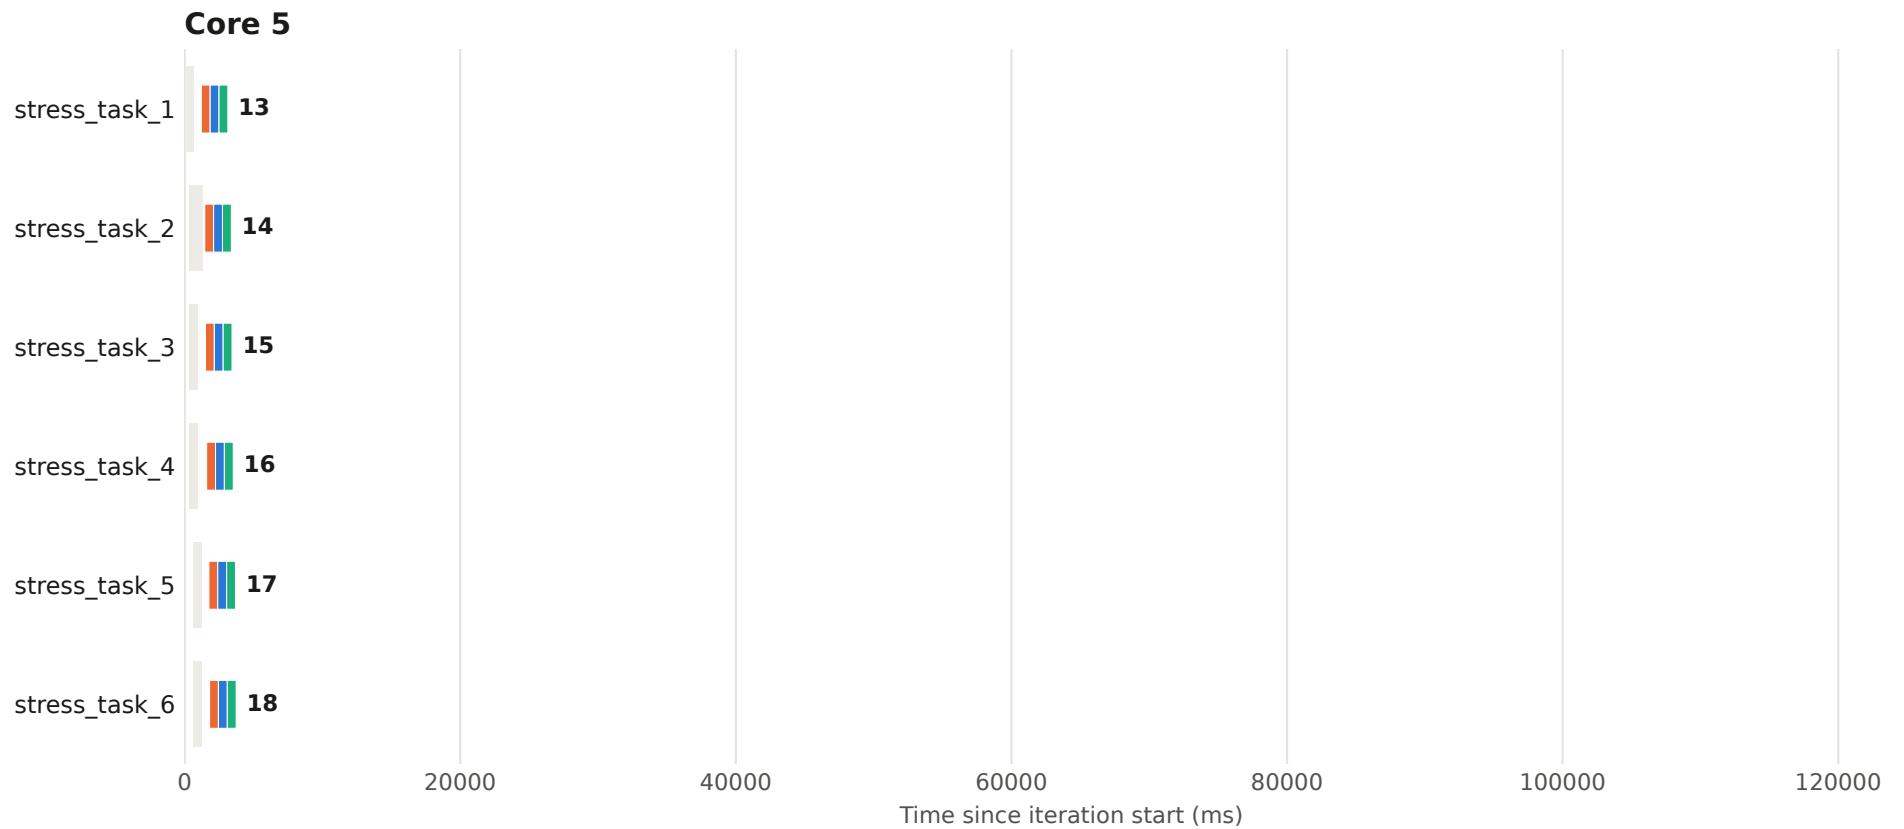


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 15 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

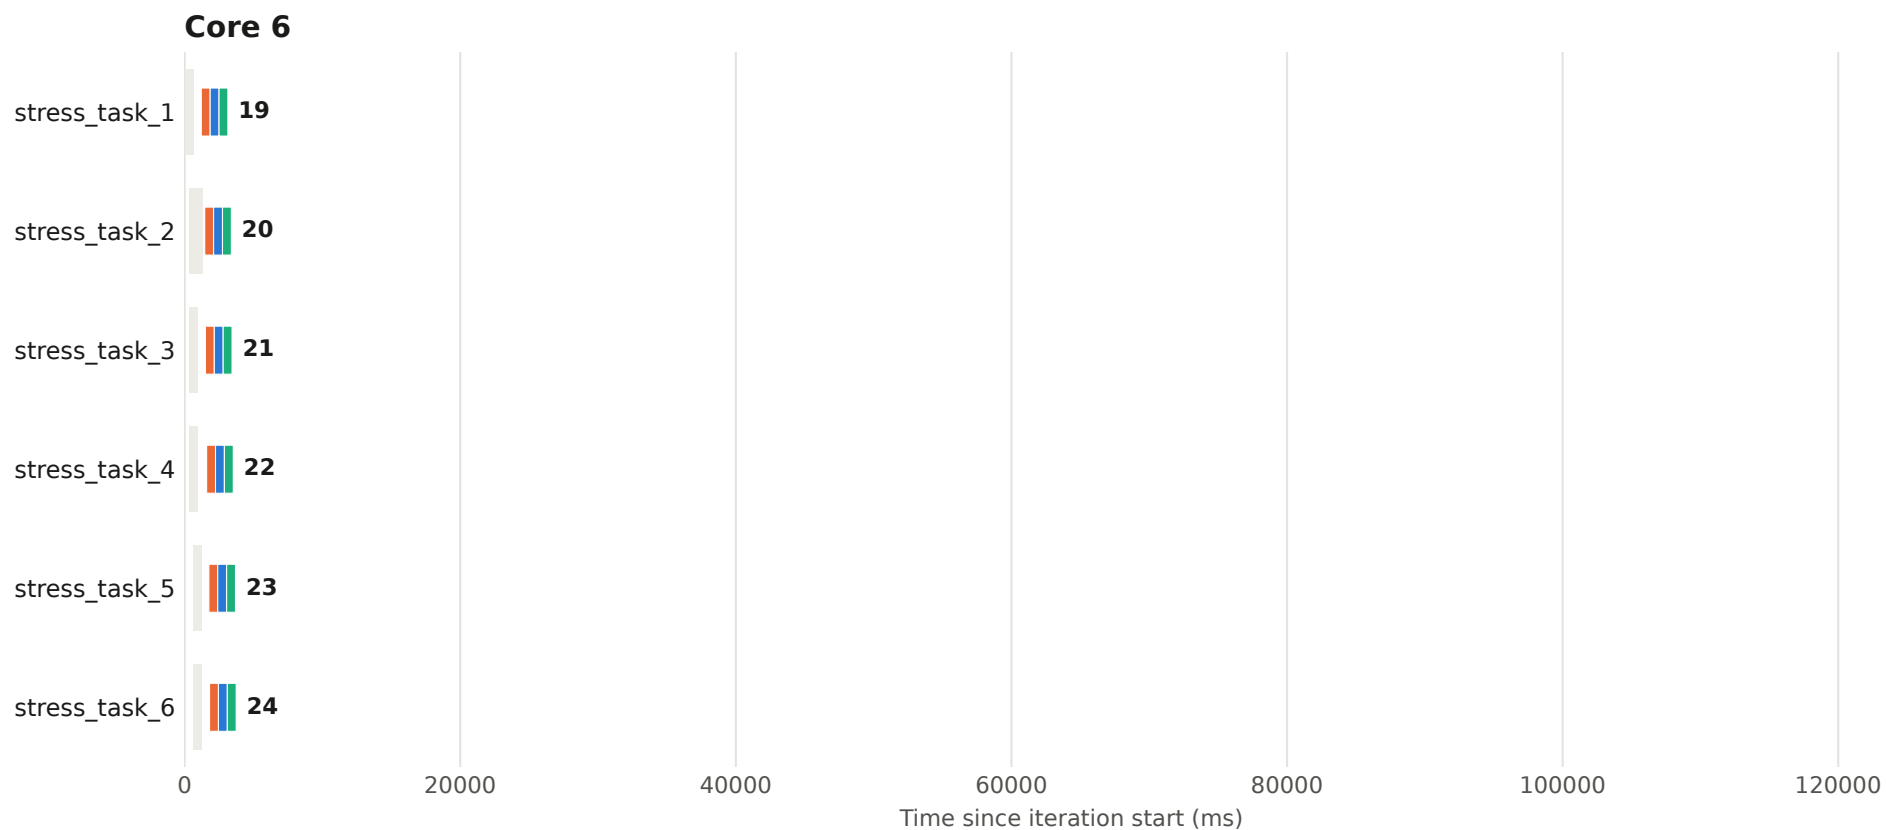


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 15 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

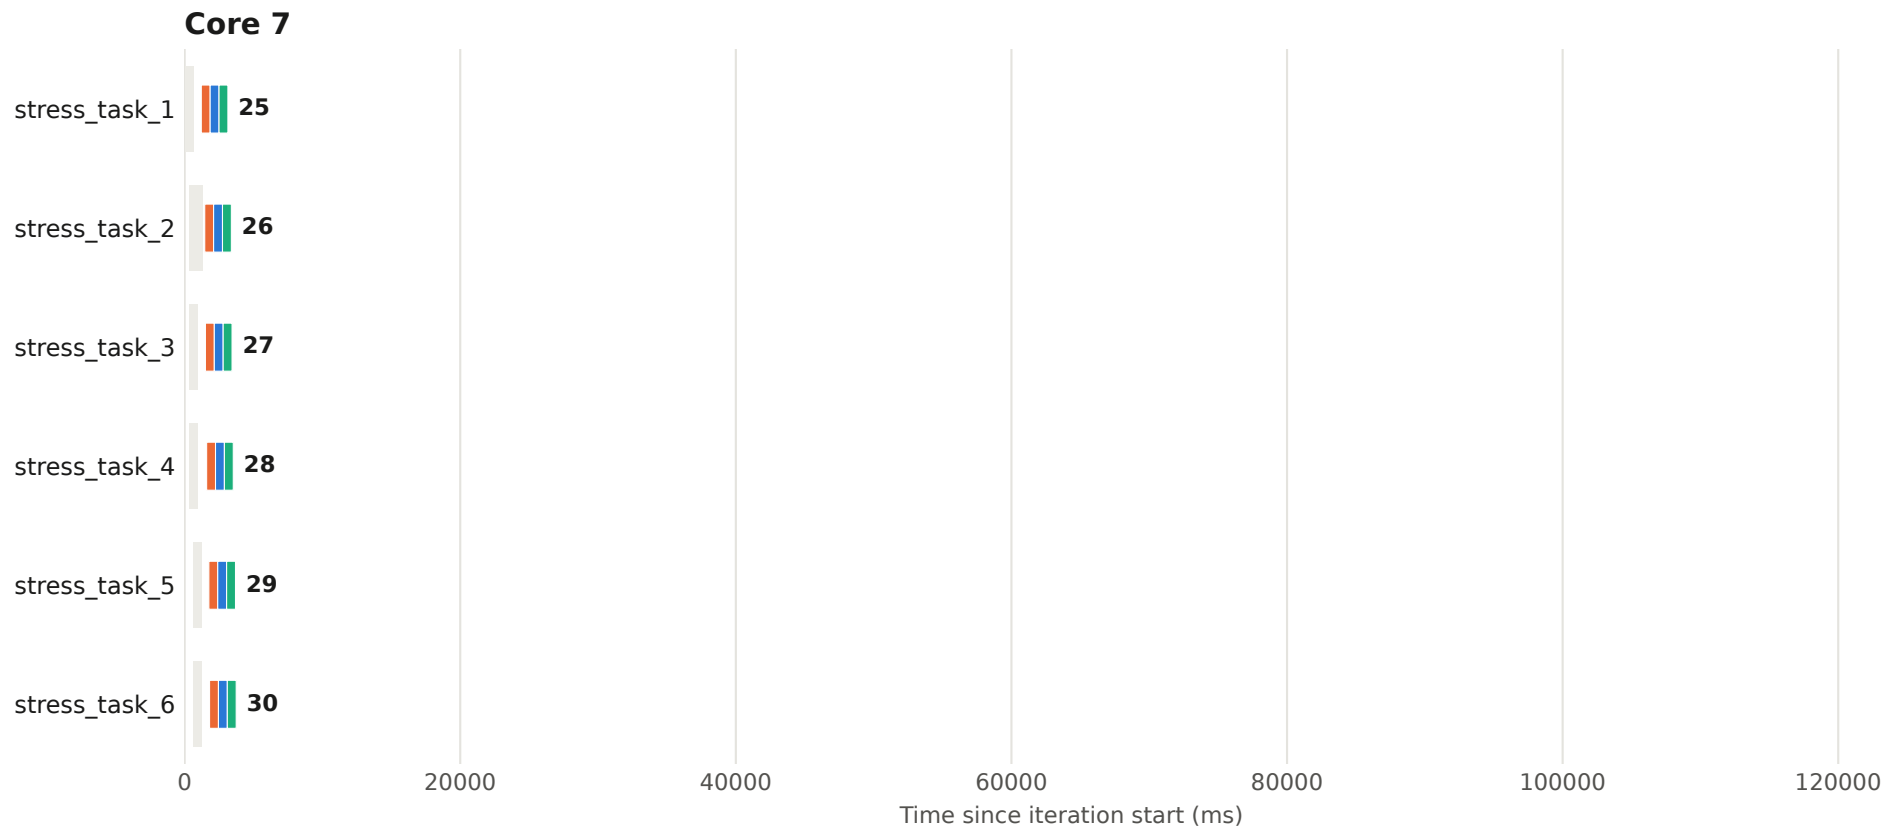


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 16 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

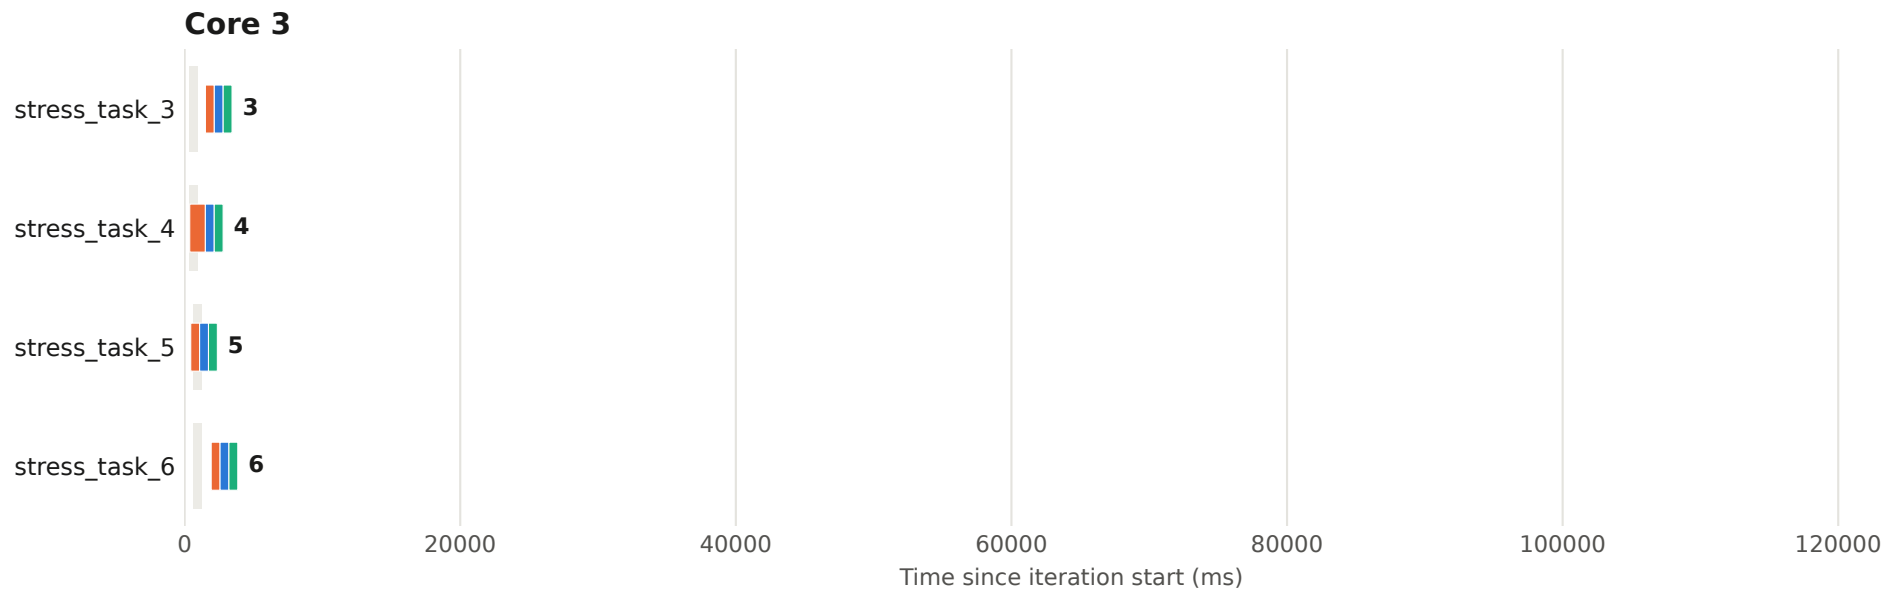


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 16 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

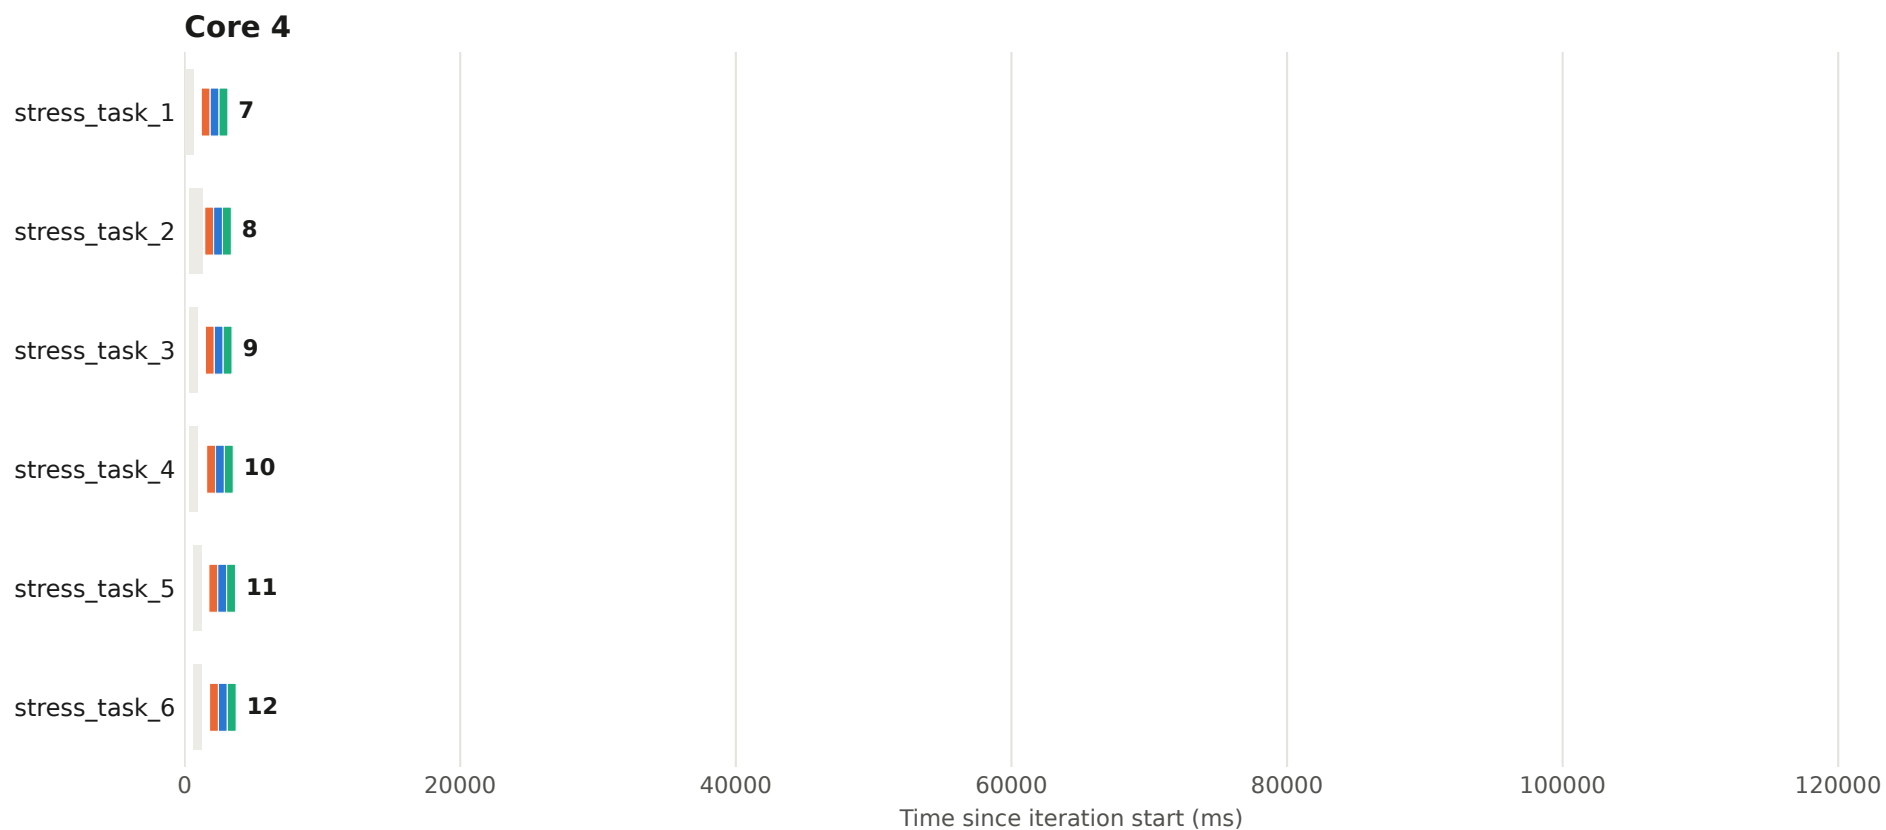


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 16 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

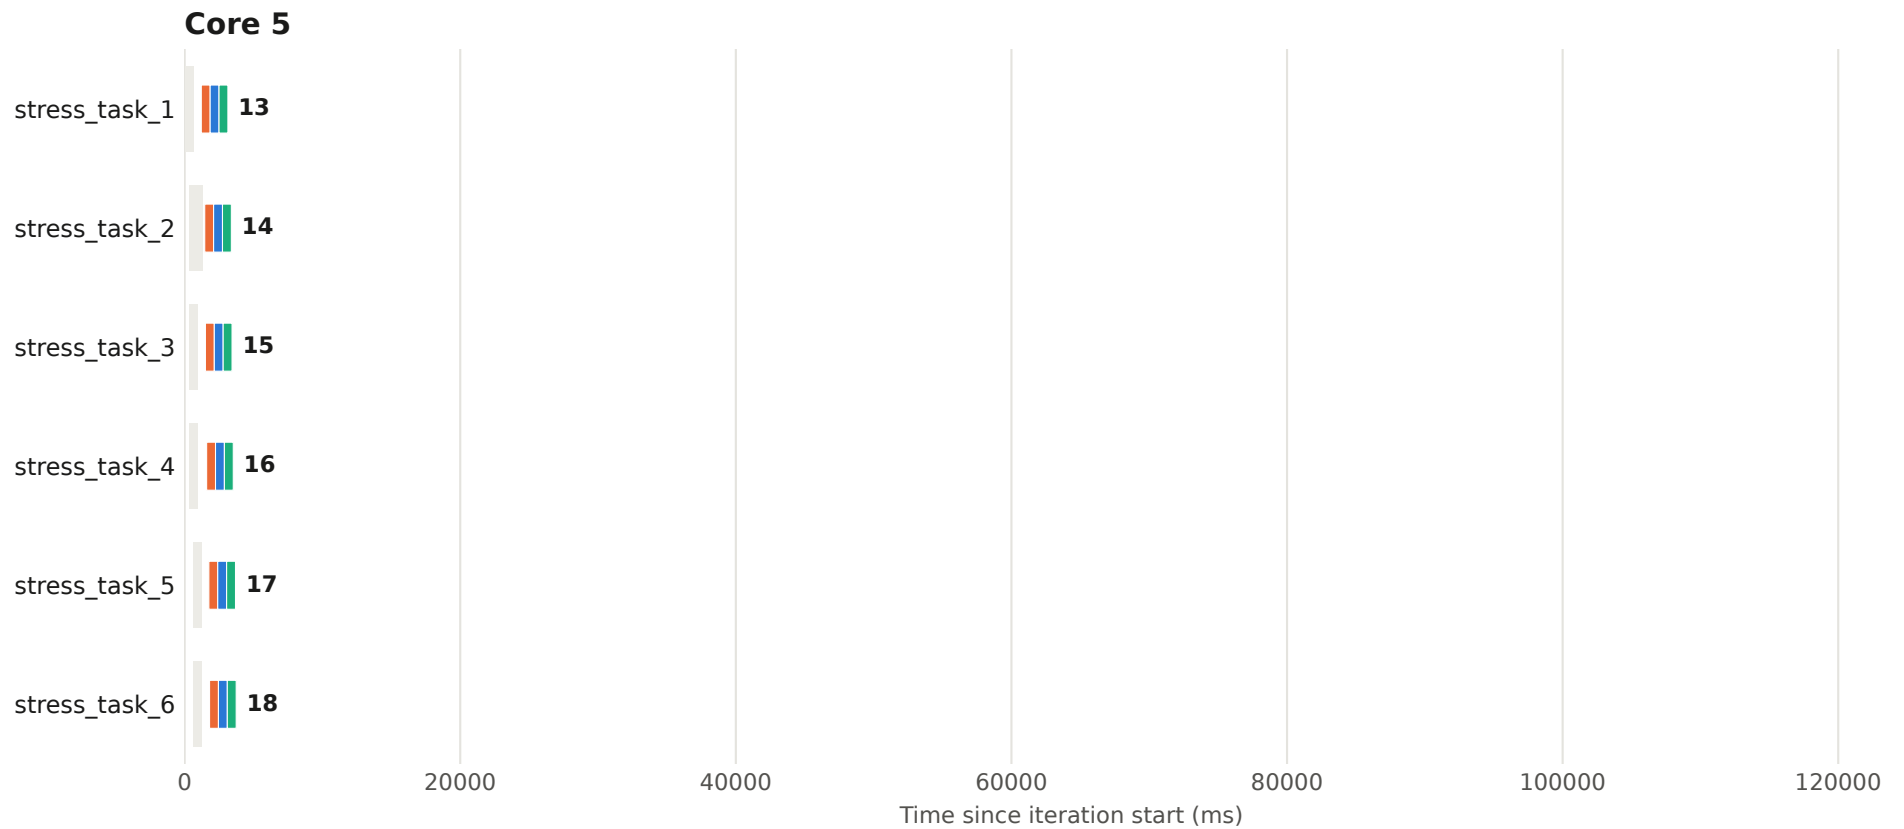


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 16 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

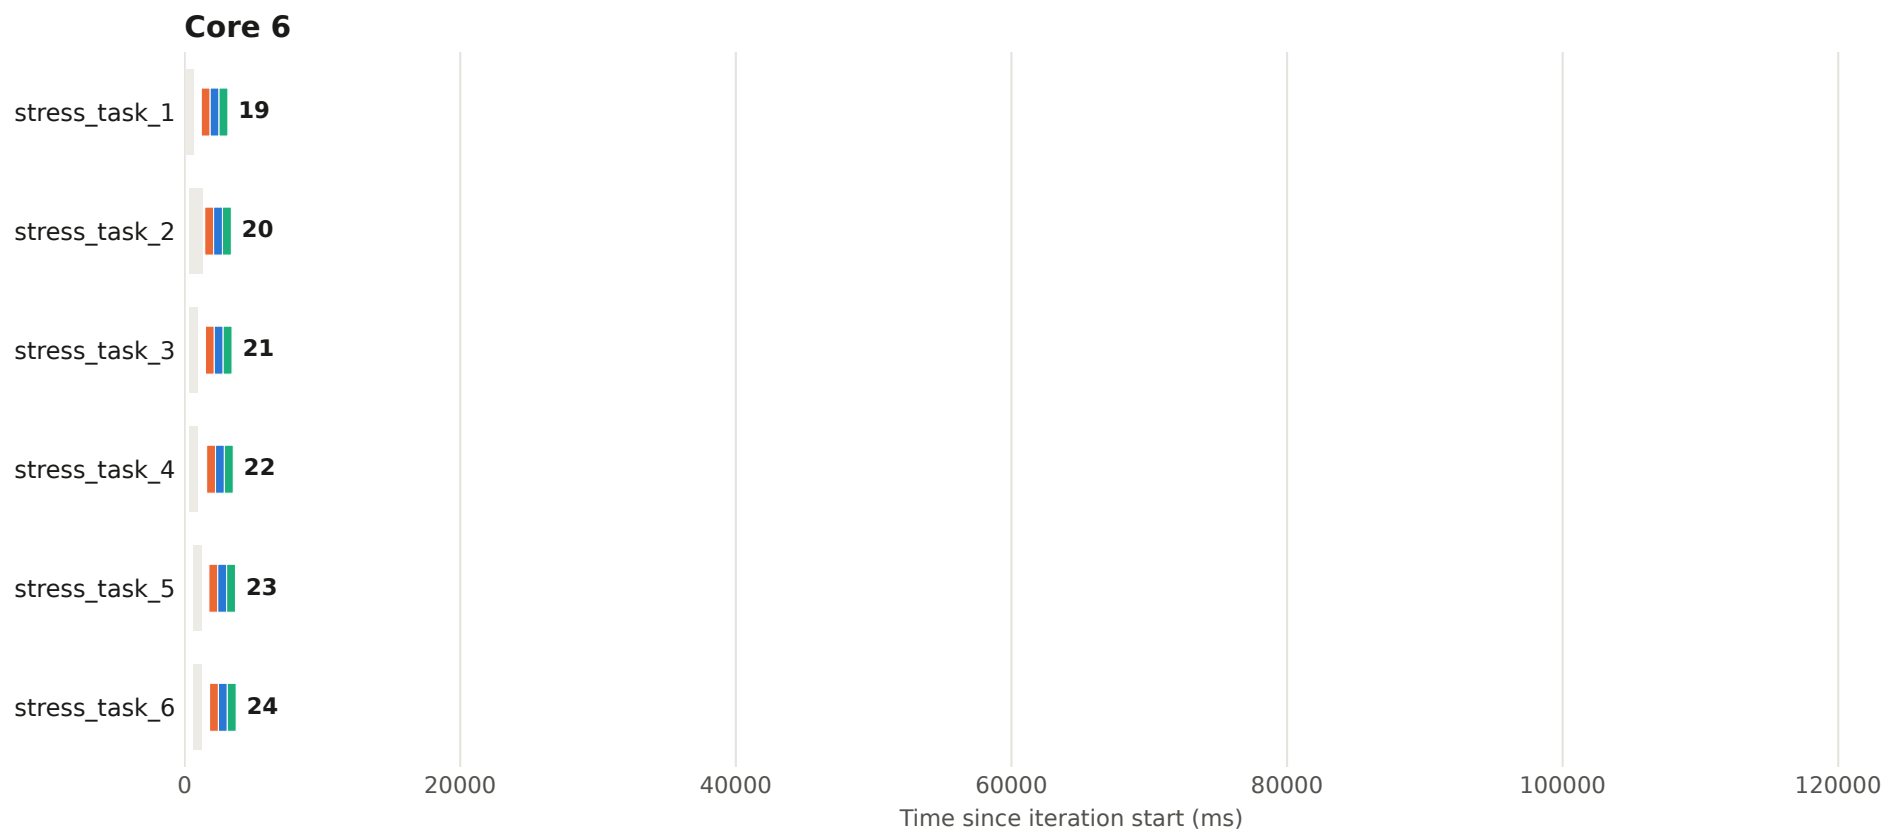


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 16 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

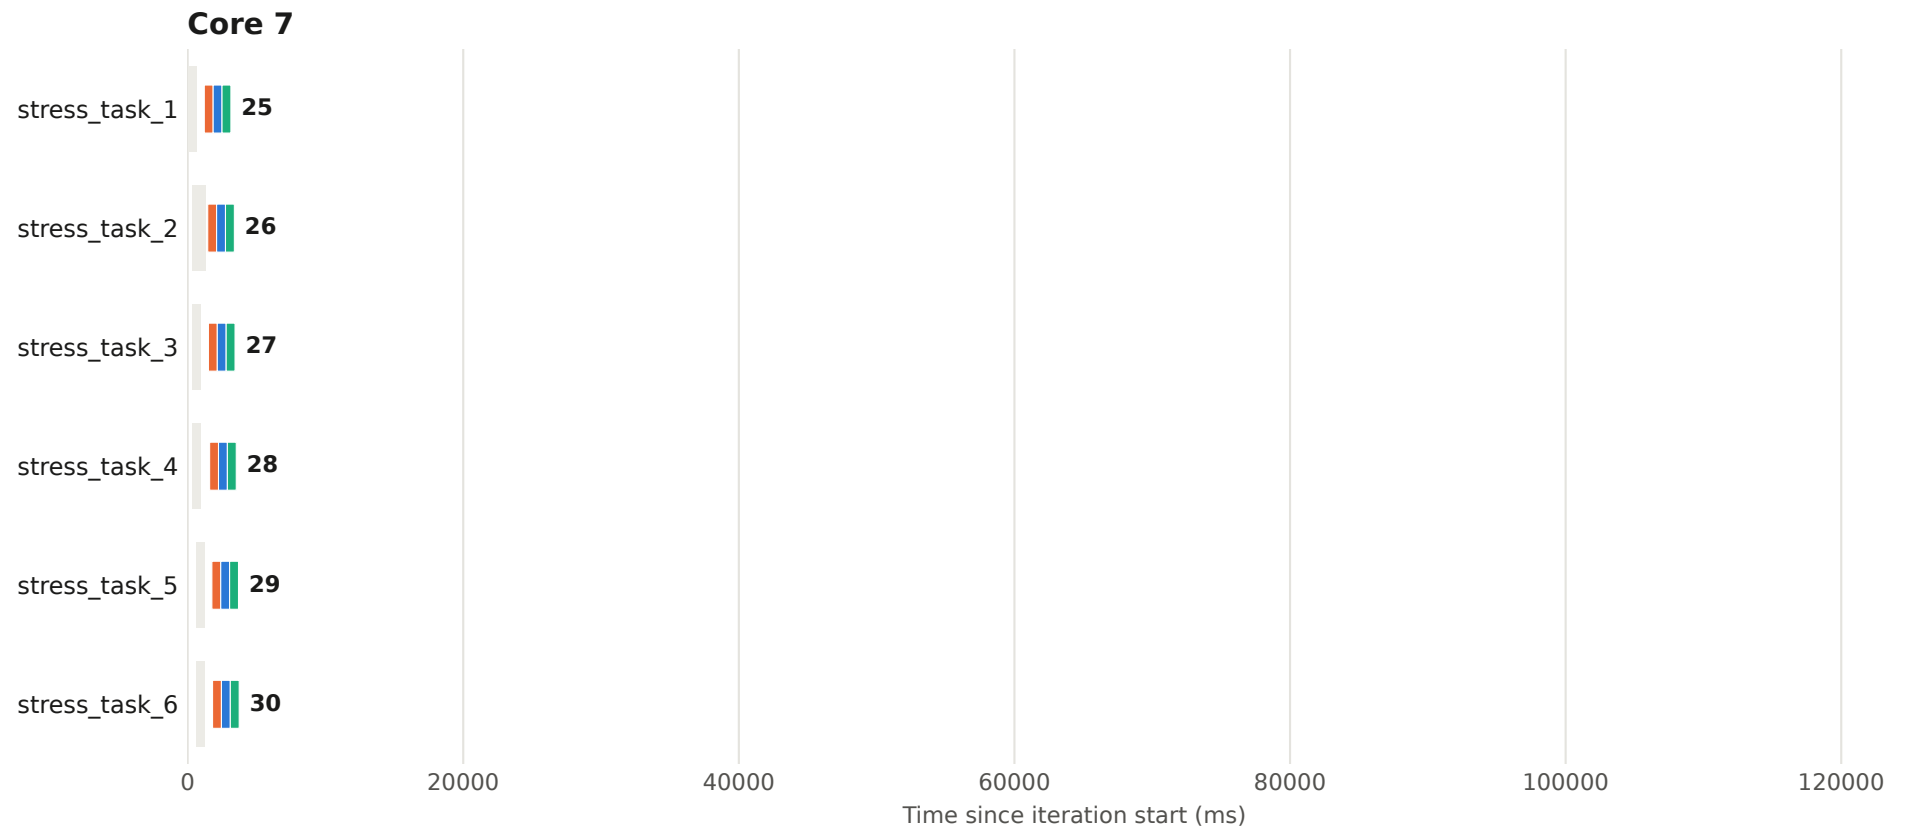


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 17 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

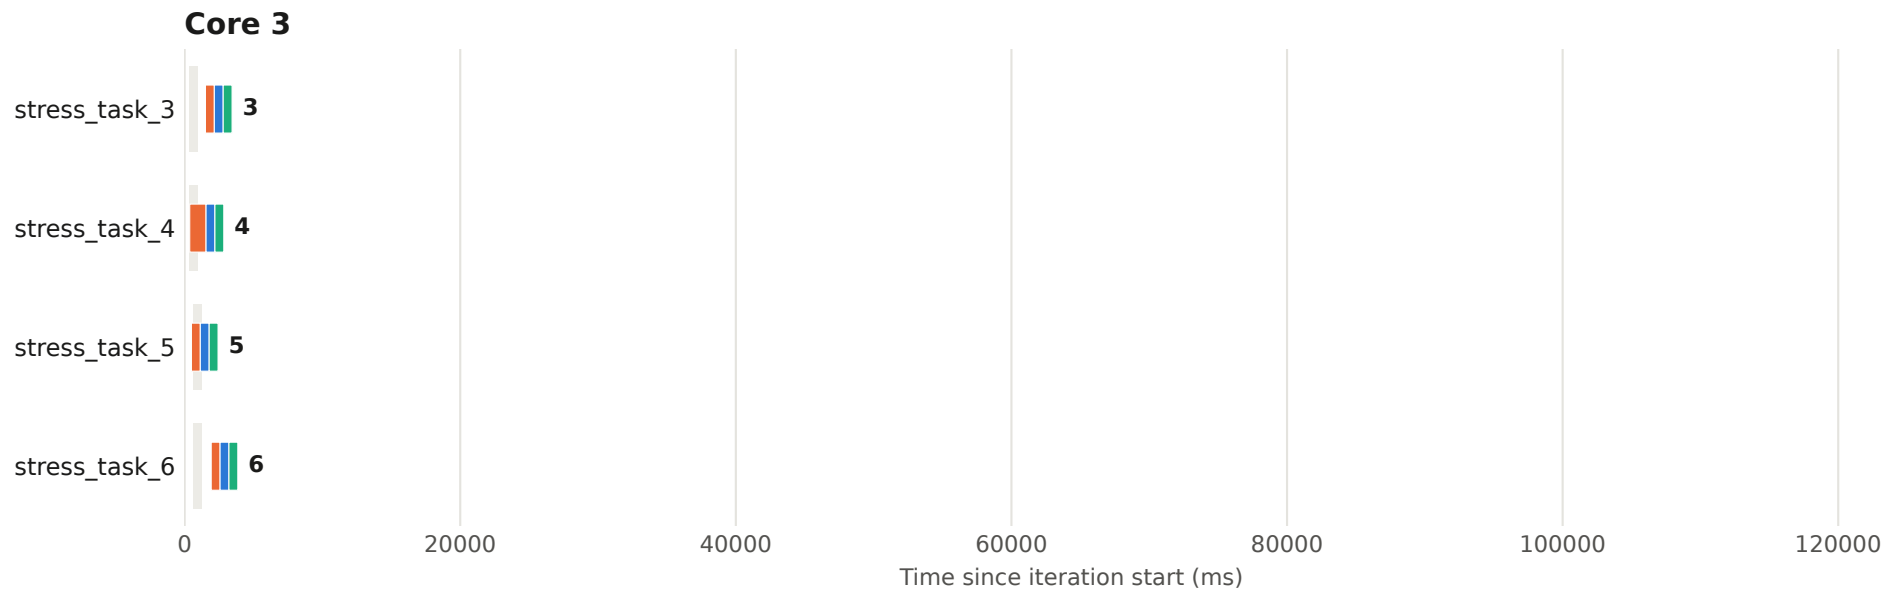


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 17 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

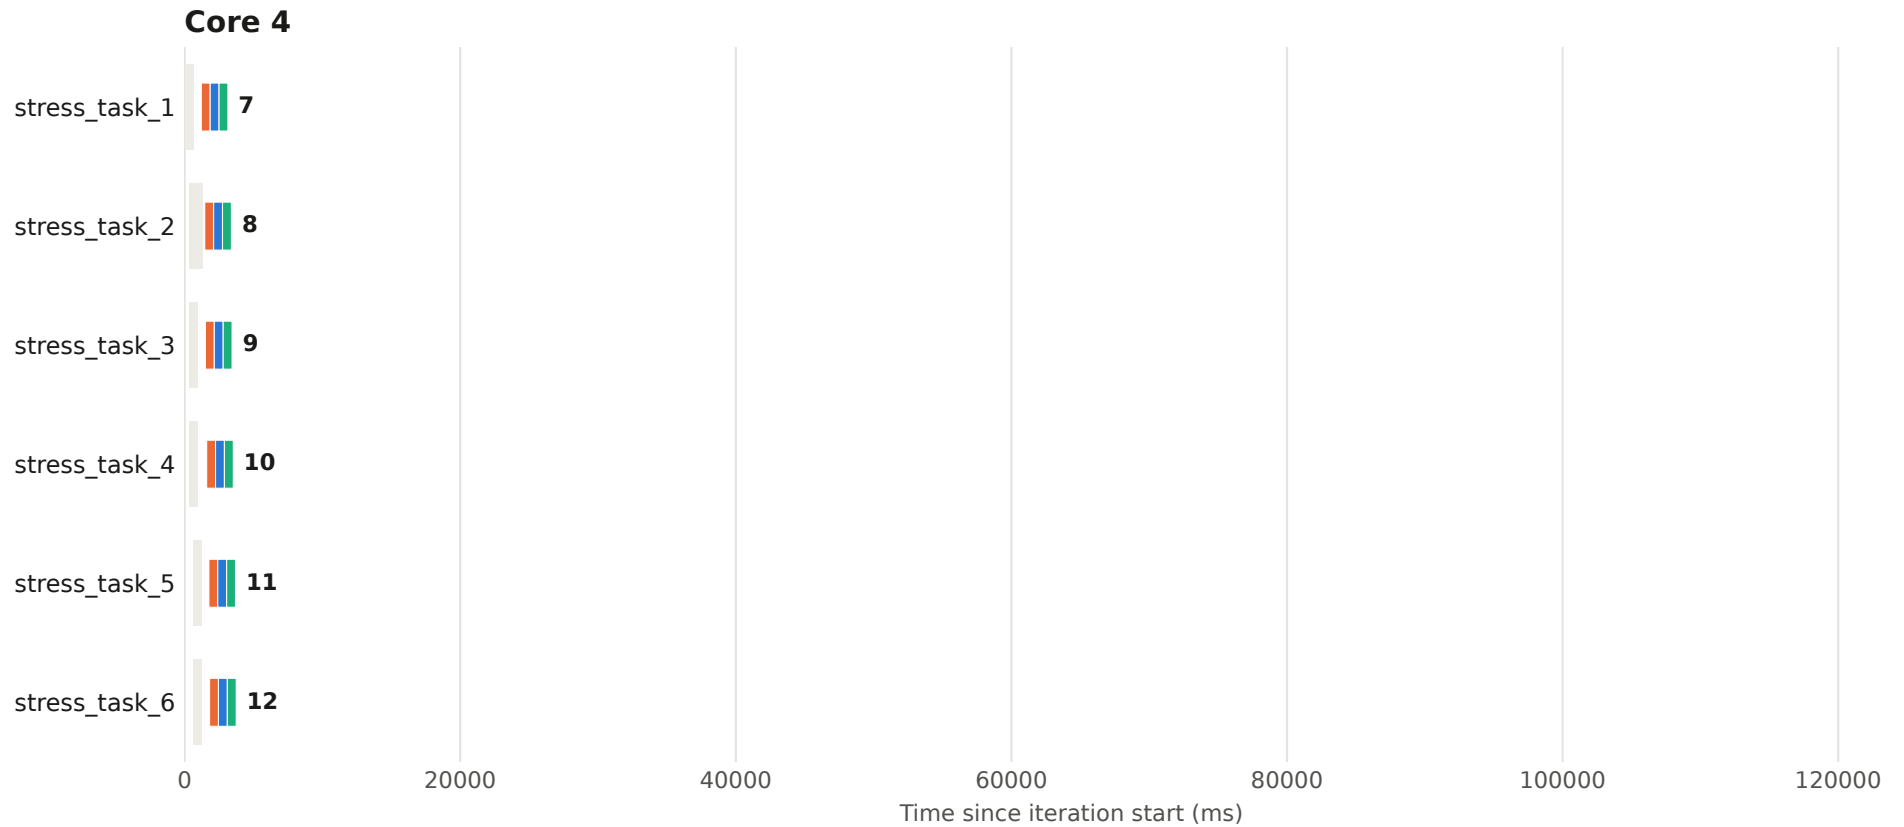


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 17 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

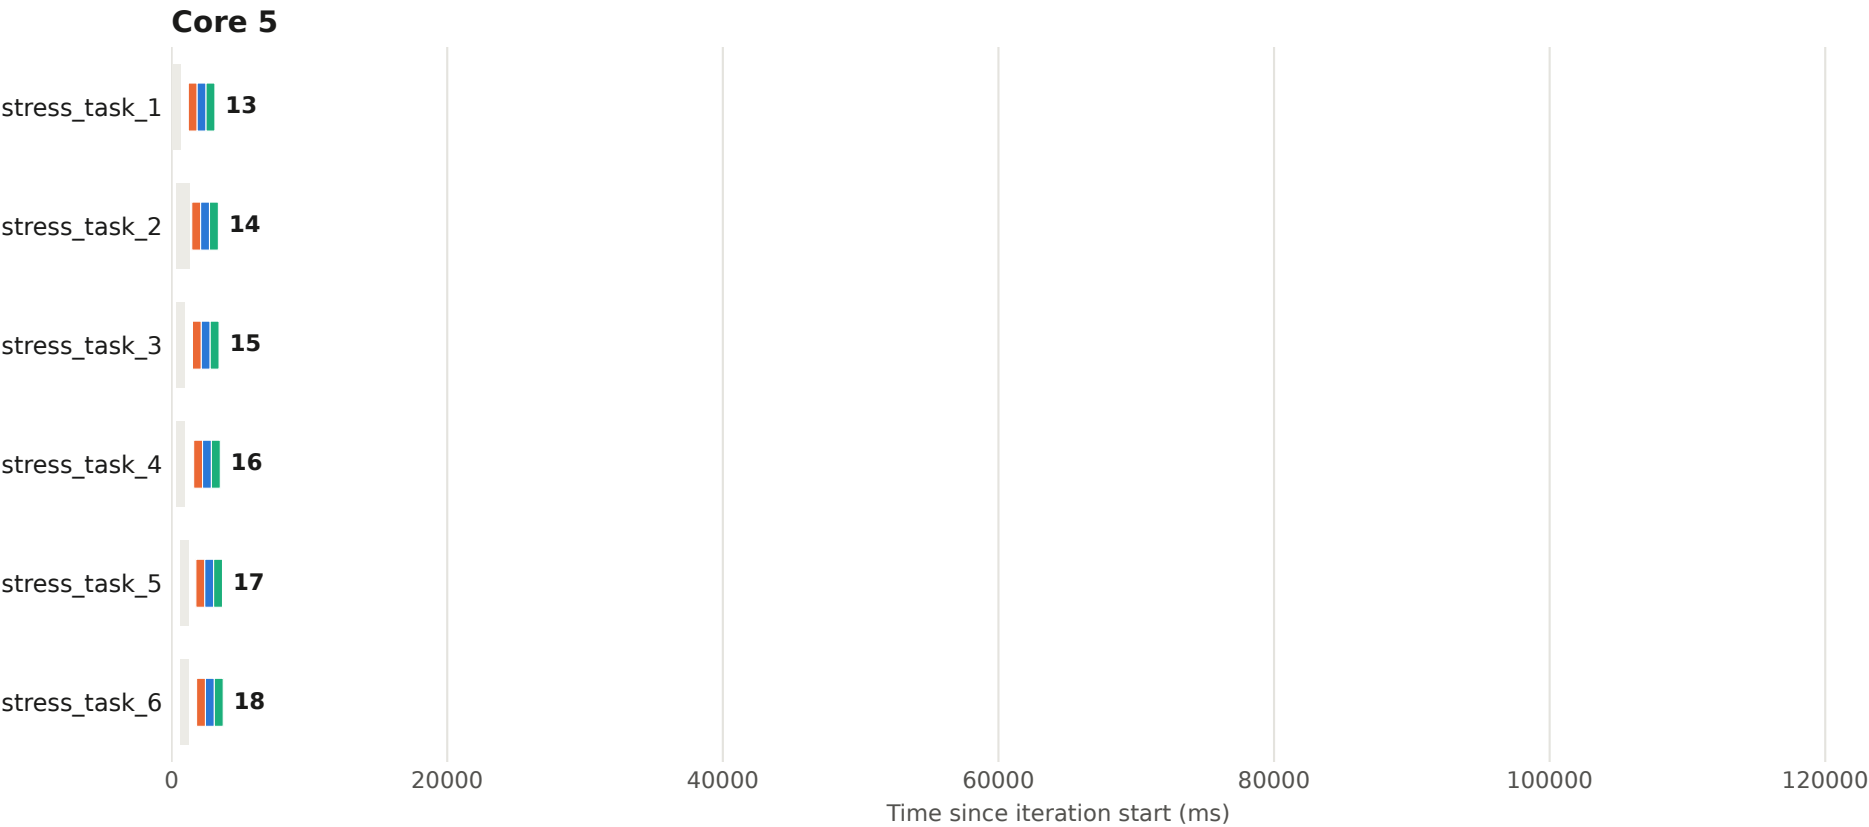


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 17 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

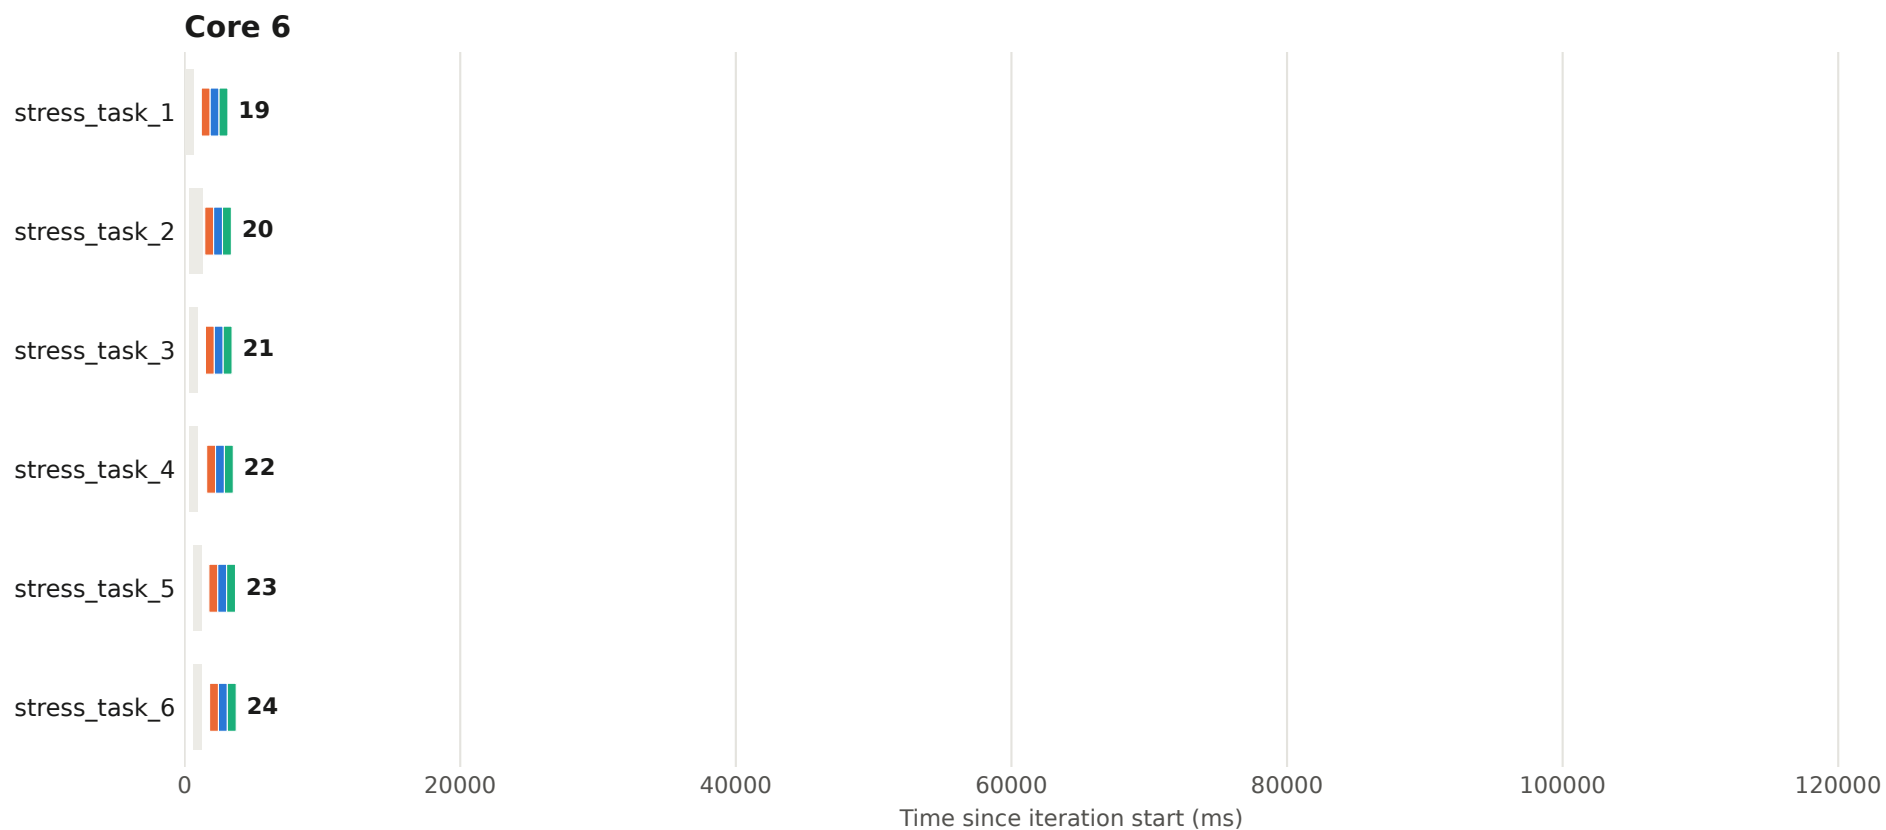


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 17 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

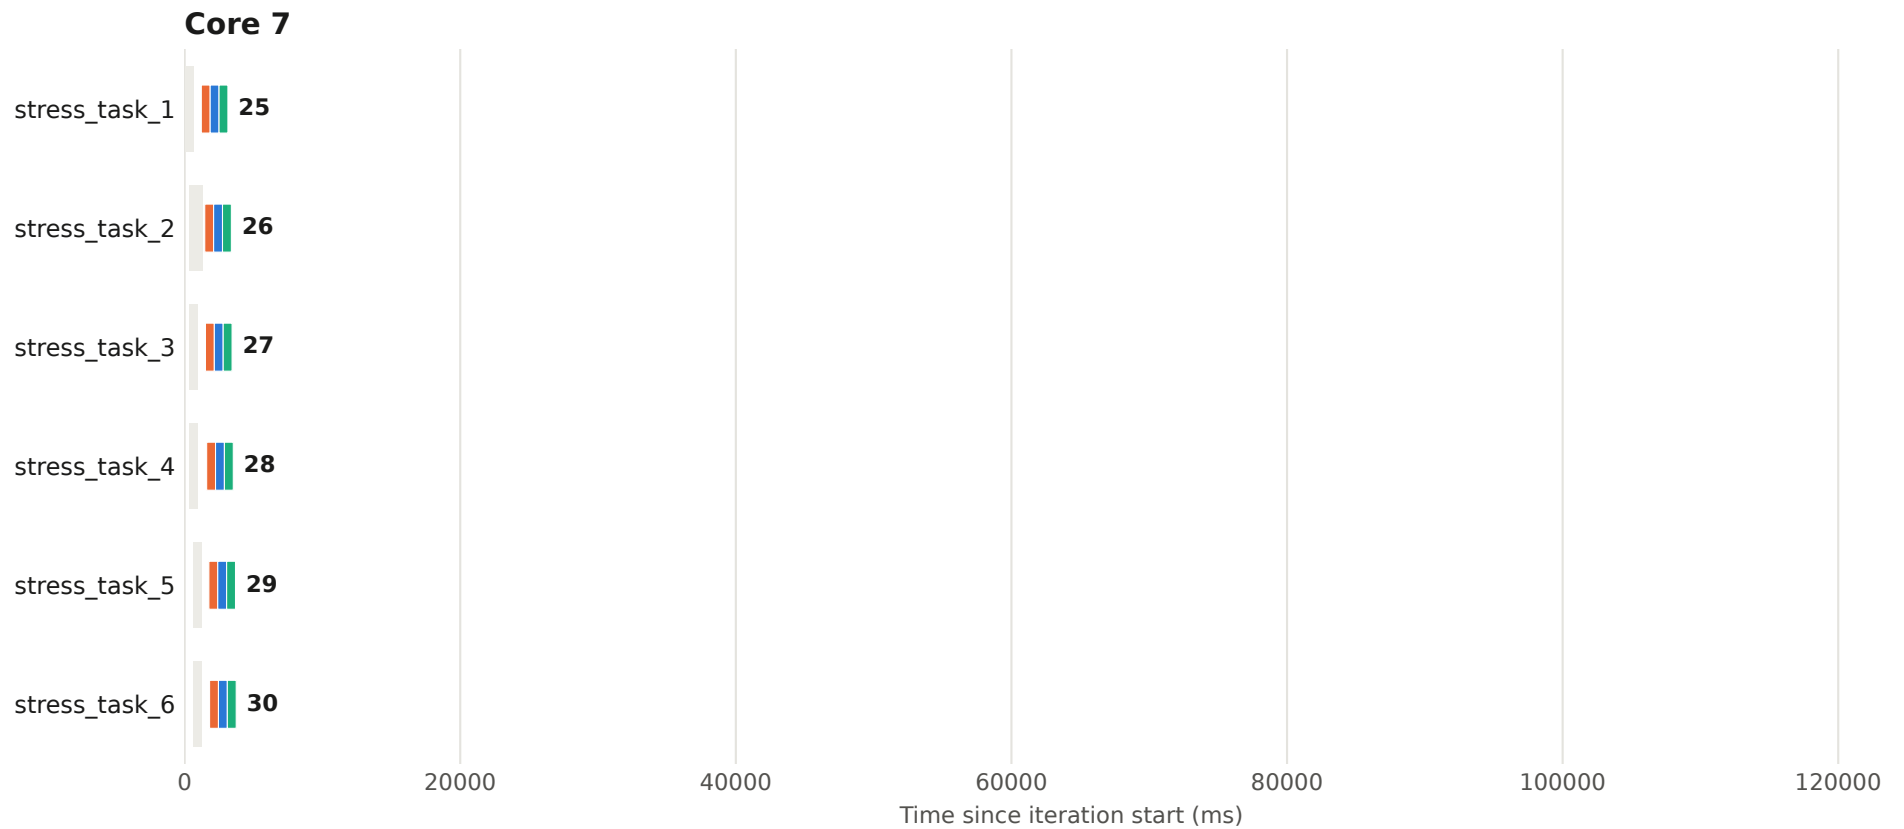


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 18 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

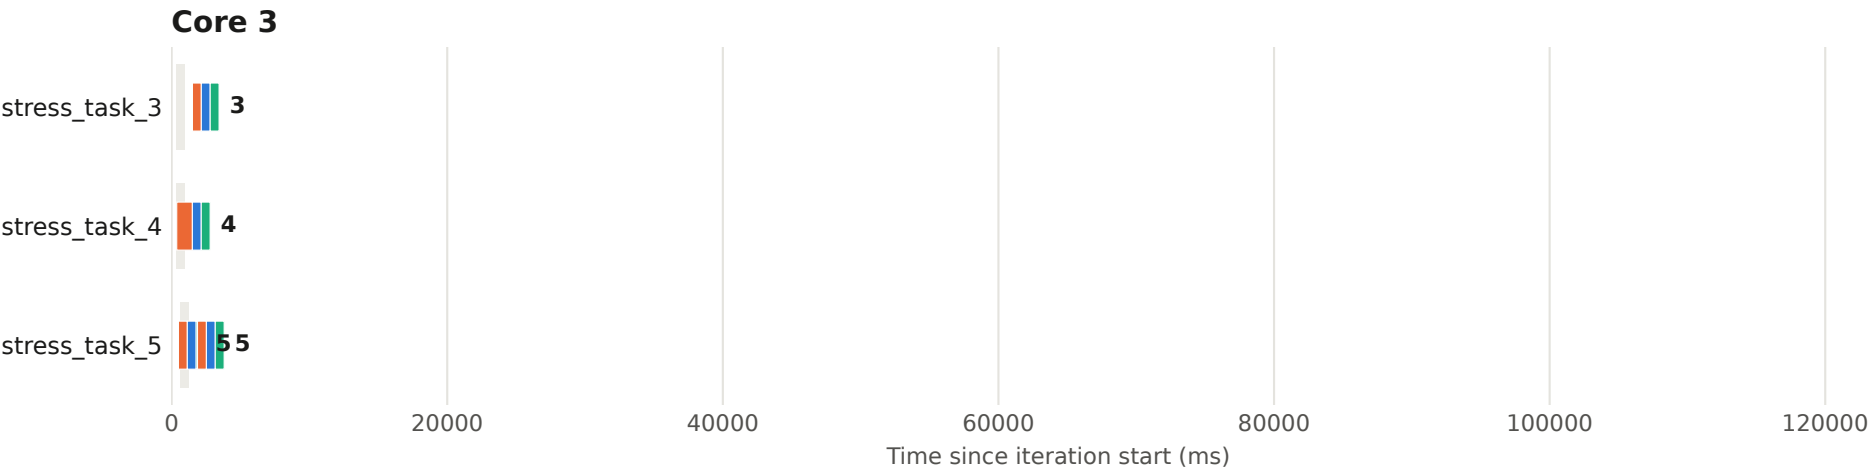


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 18 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

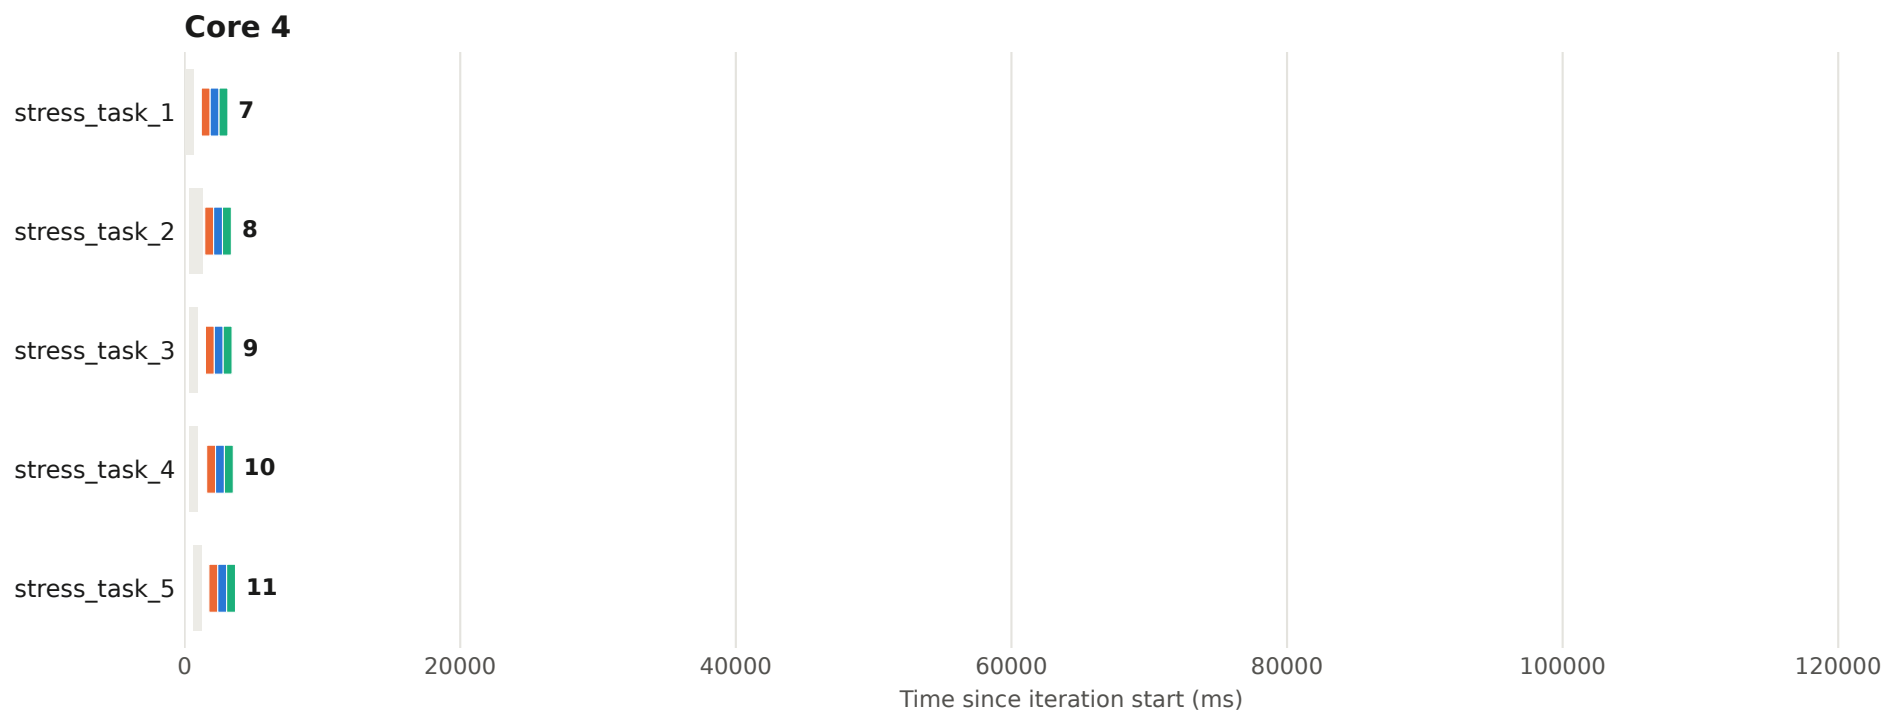


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 18 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

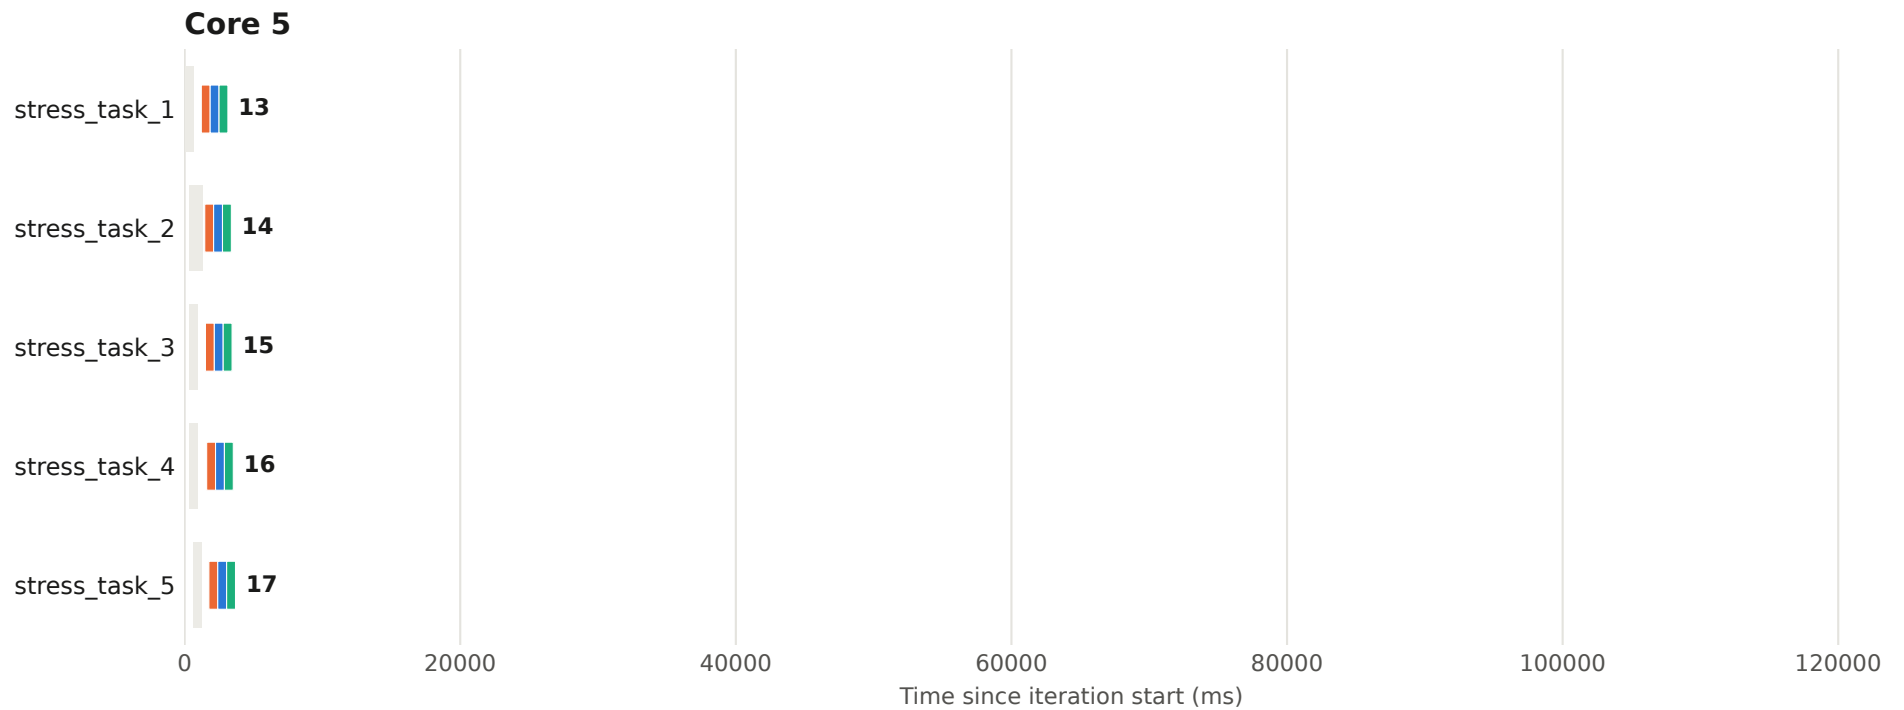


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 18 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

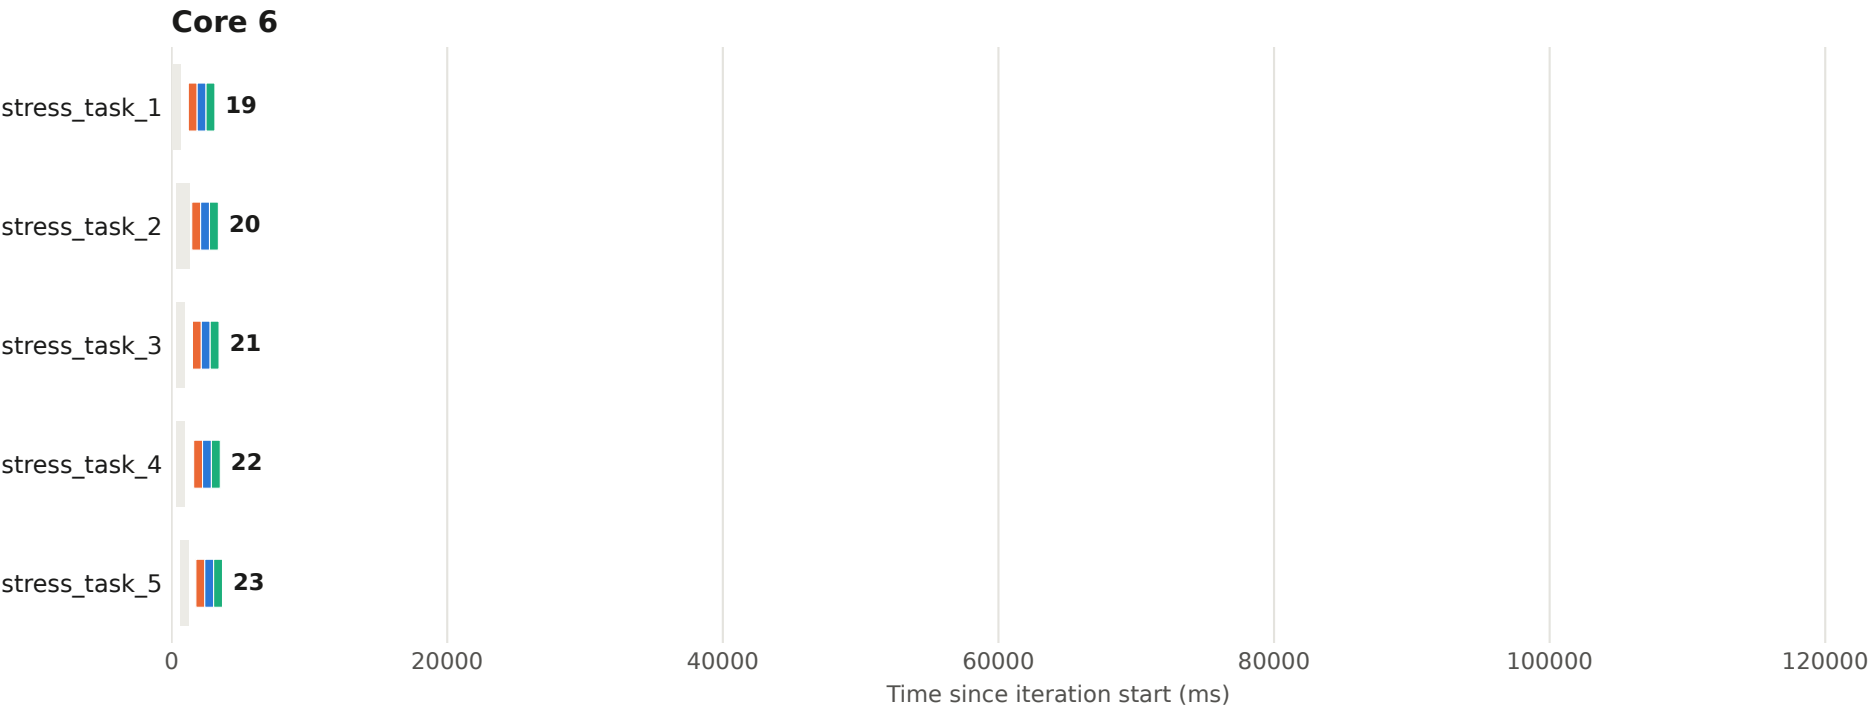


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 18 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

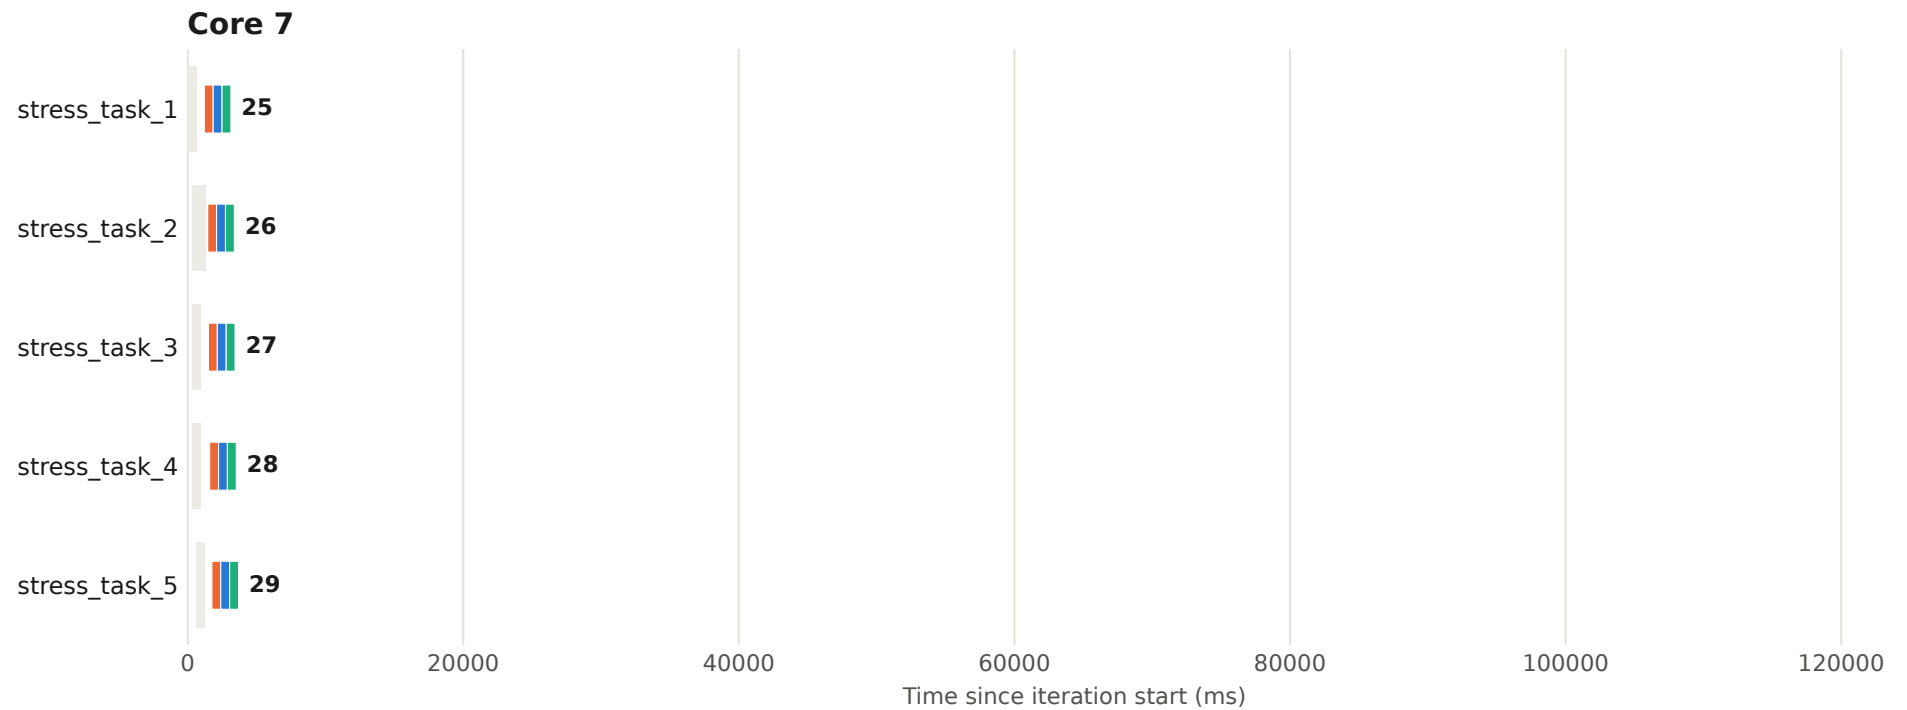


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 18 - core 72026

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

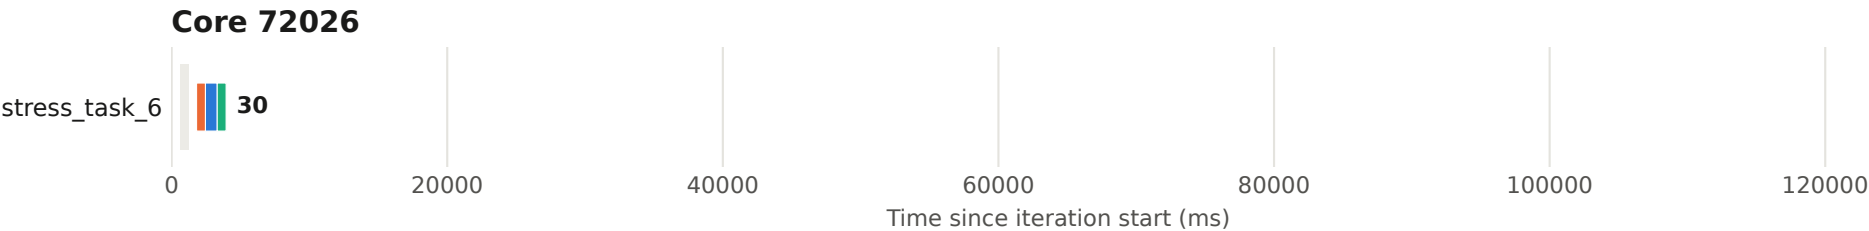

Execution plan - iteration 19 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

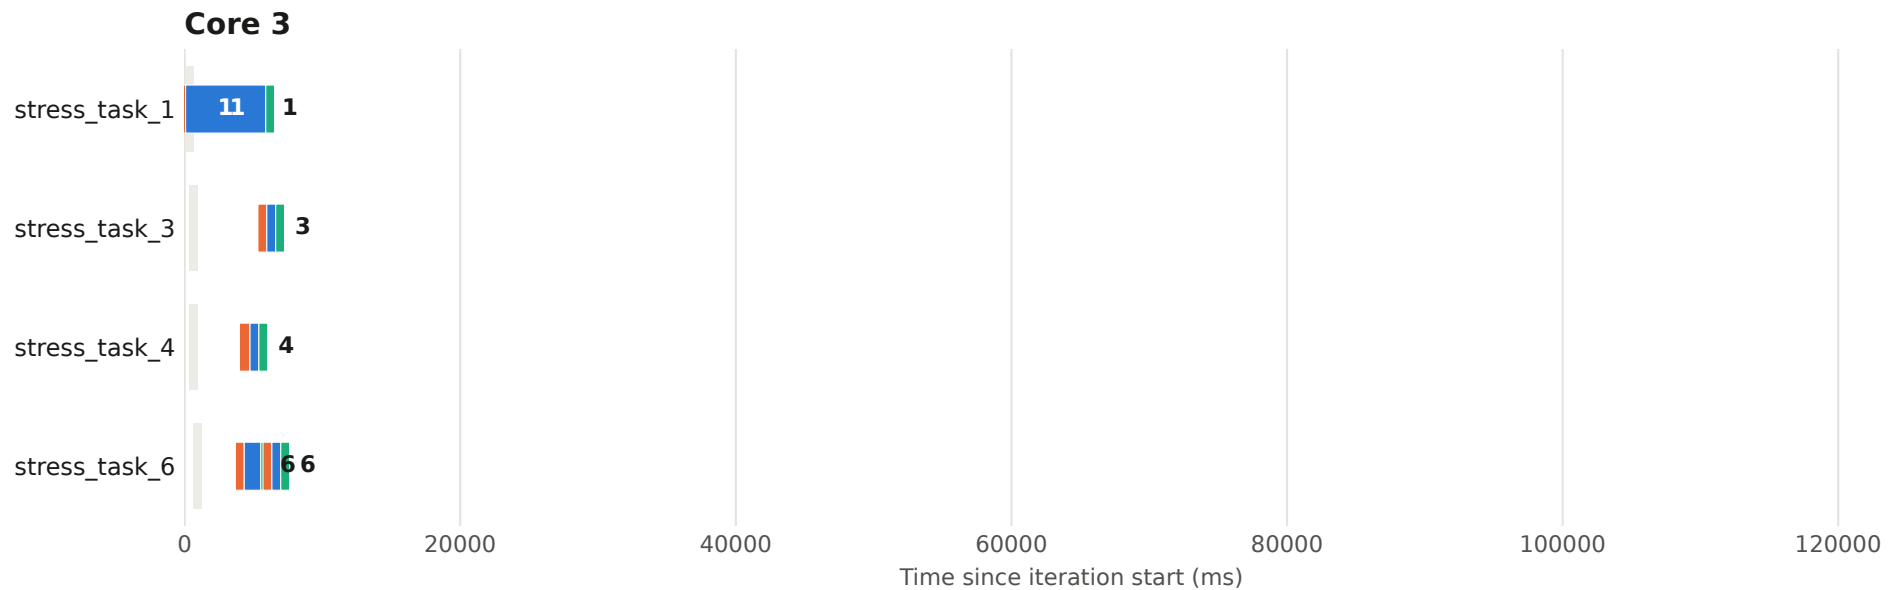

Execution plan - iteration 19 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

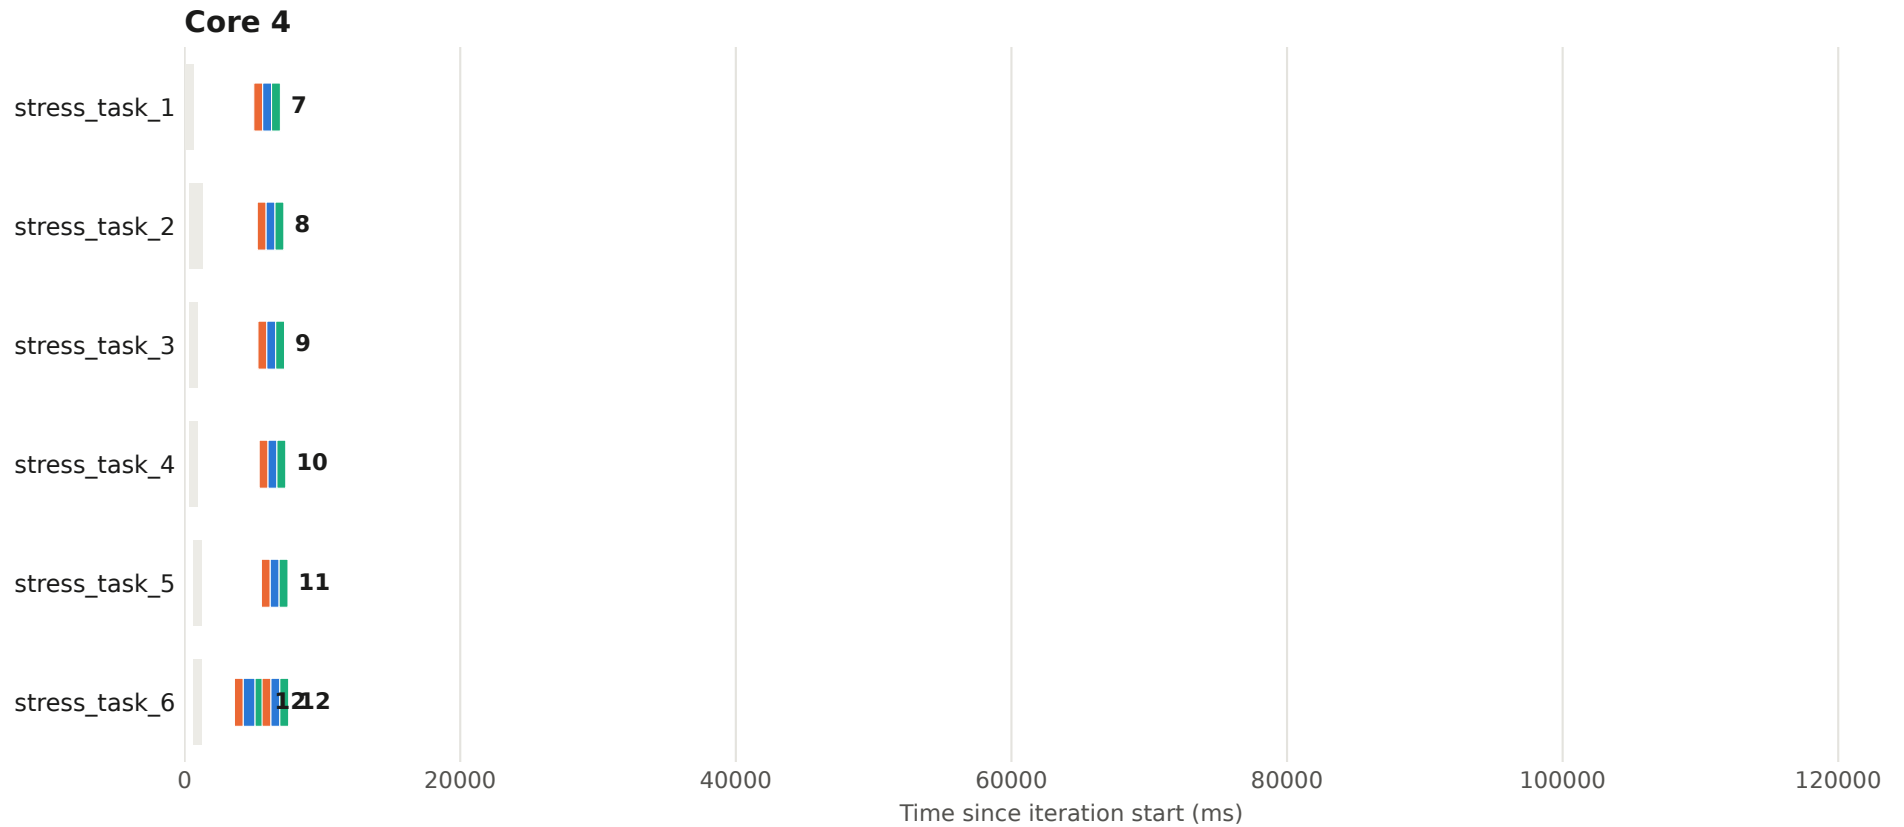


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 19 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

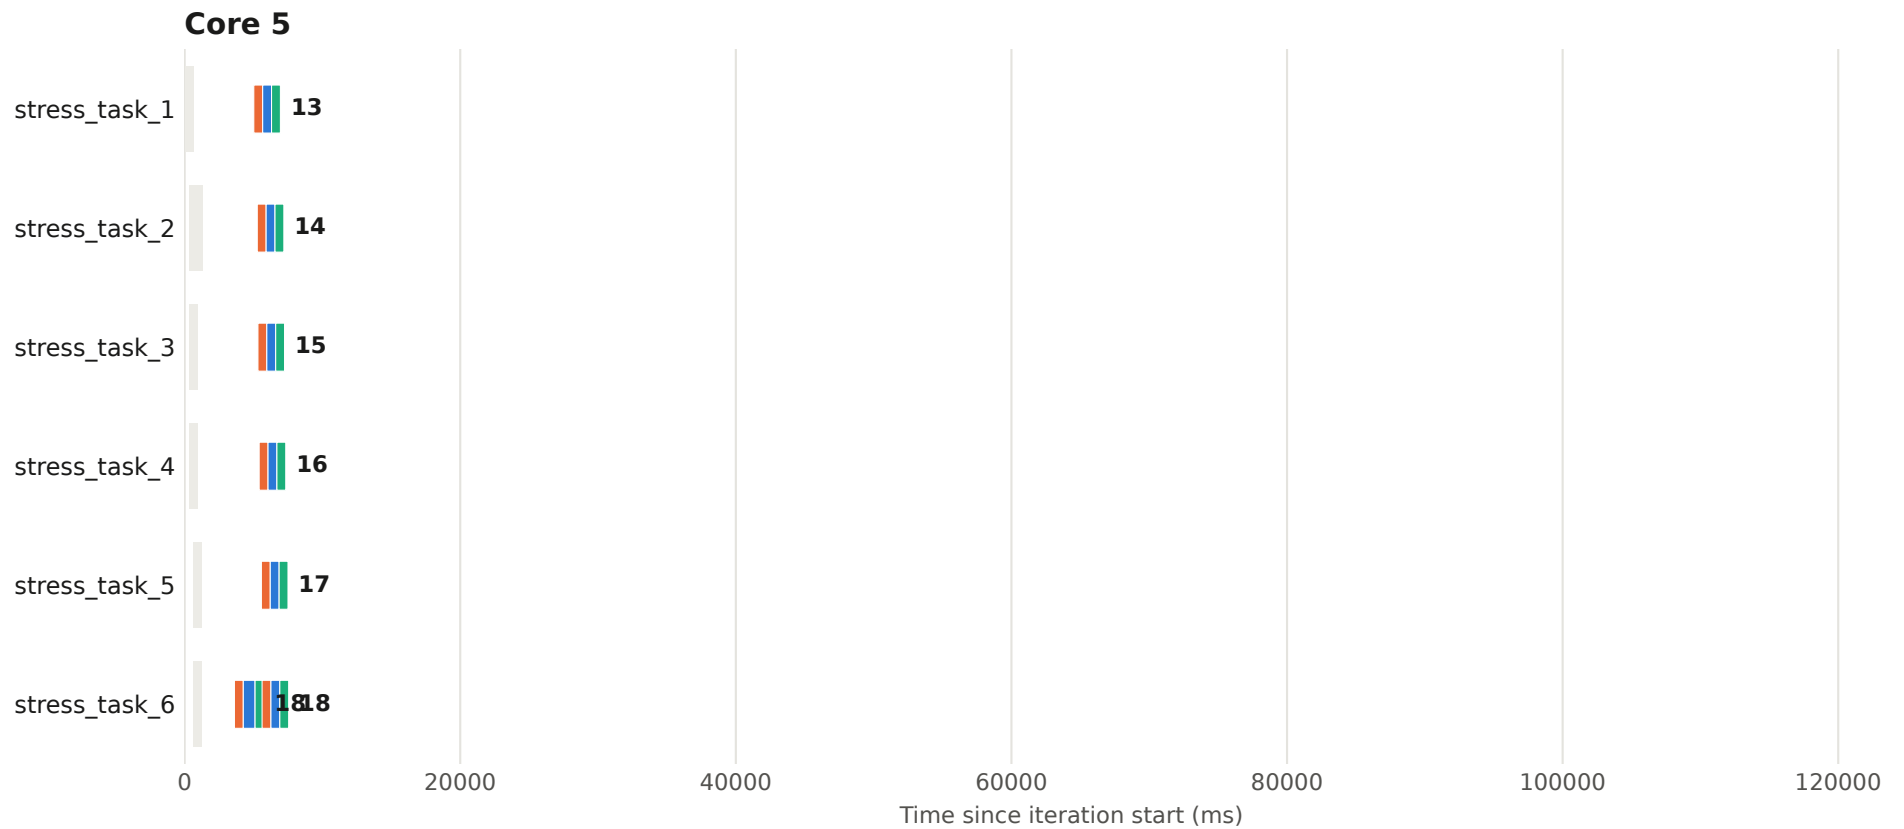


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 19 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

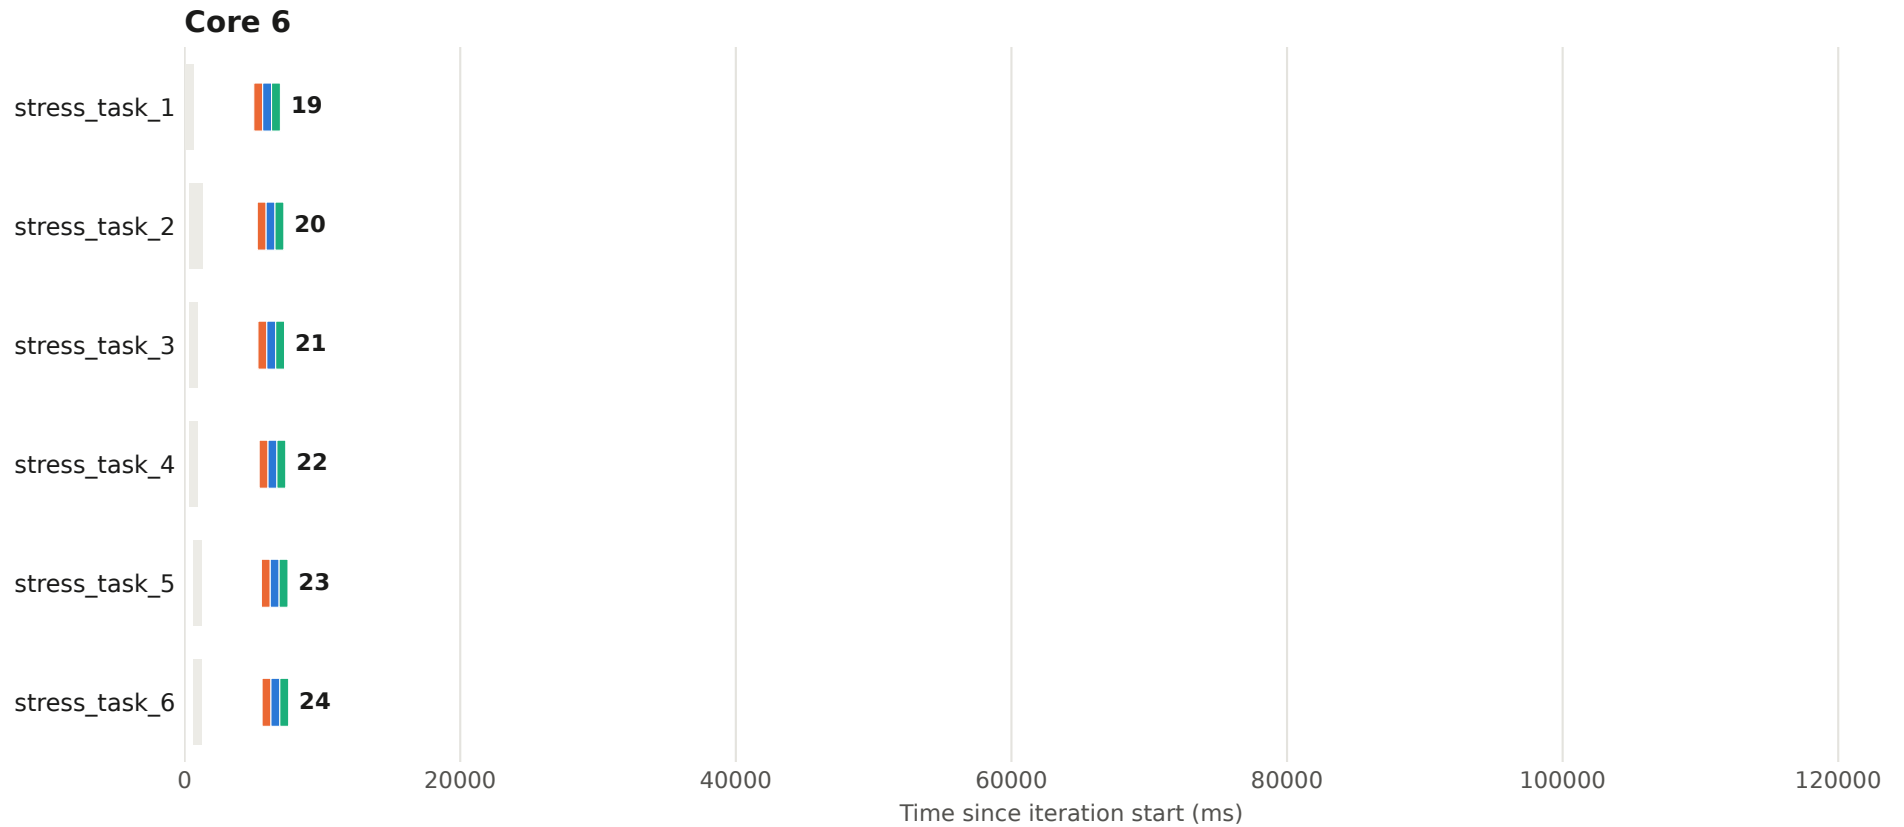


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 19 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

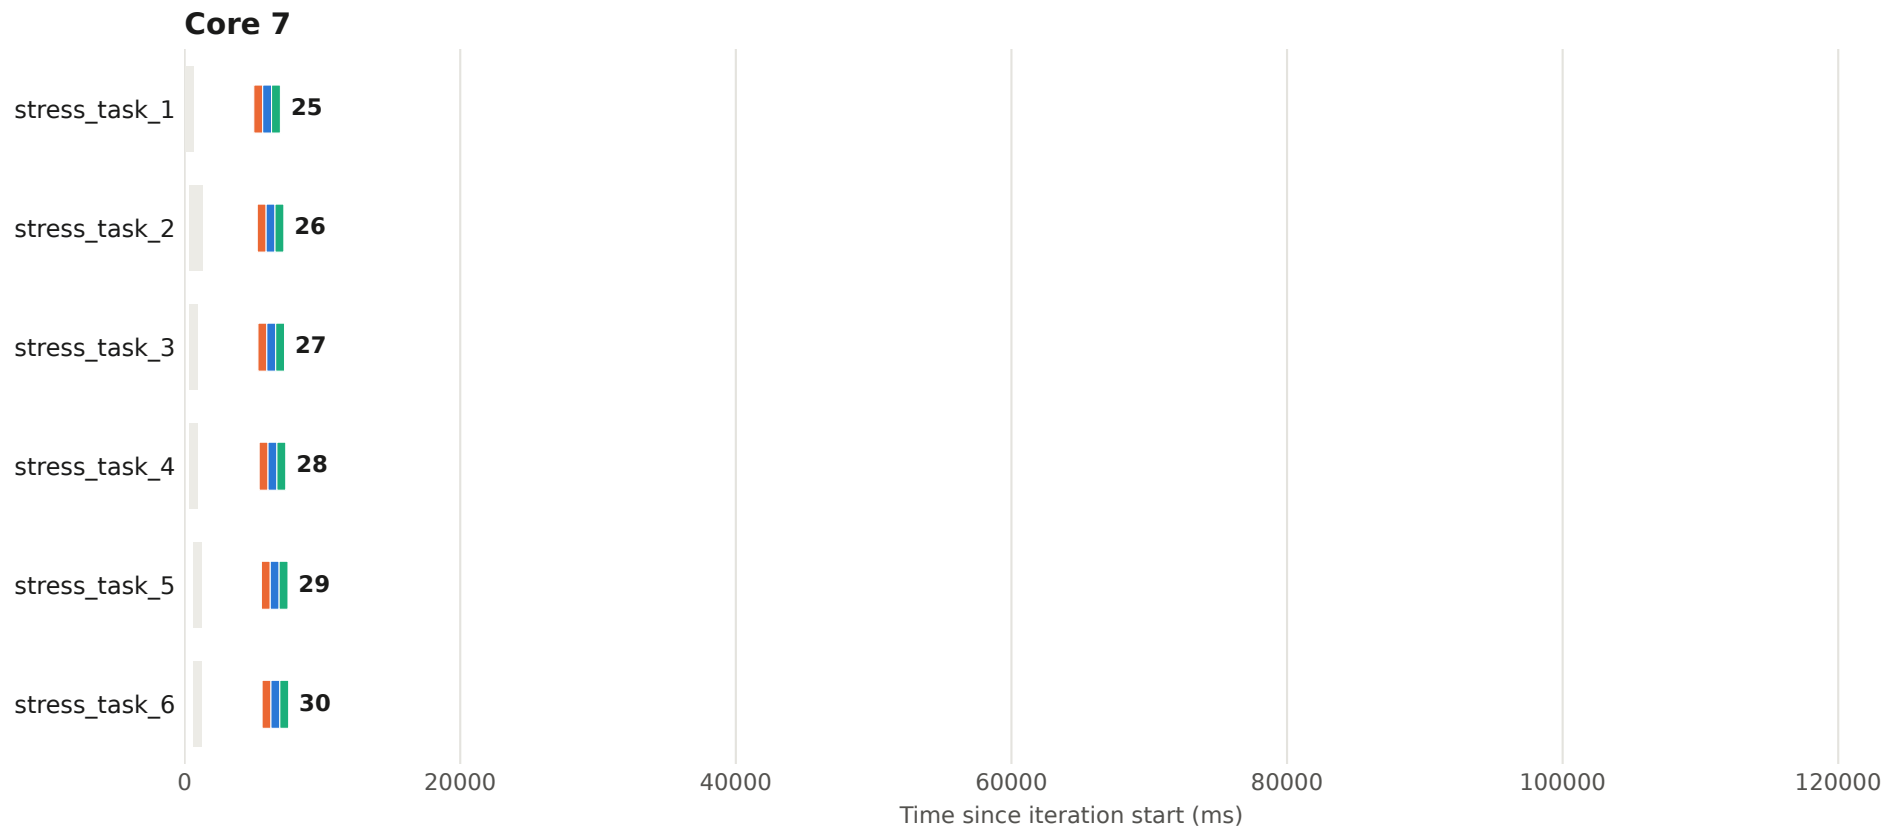


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 20 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

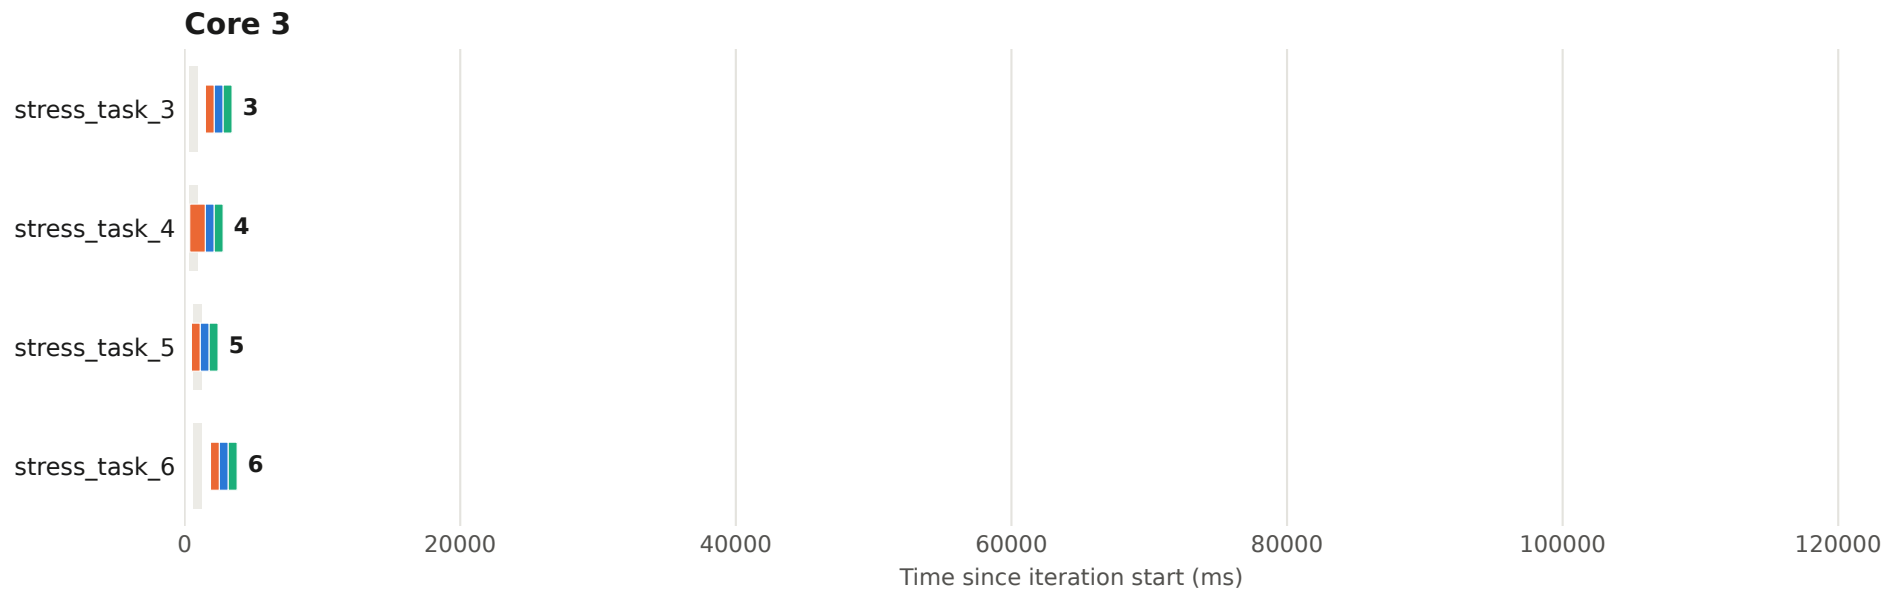

Execution plan - iteration 20 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

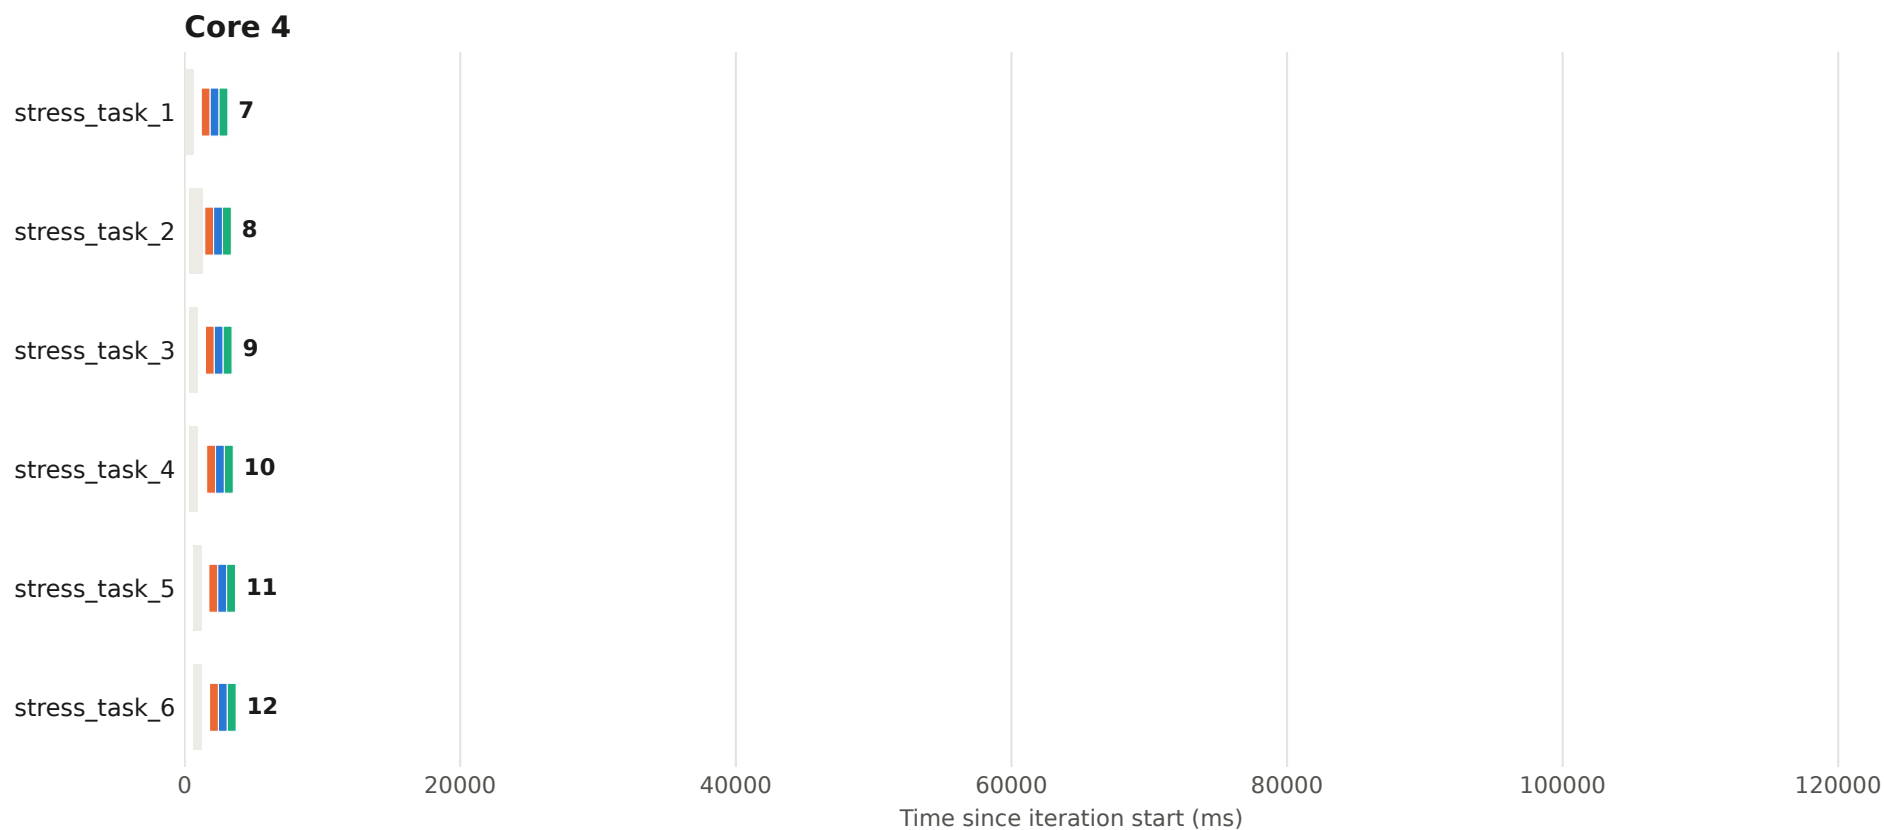


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 20 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

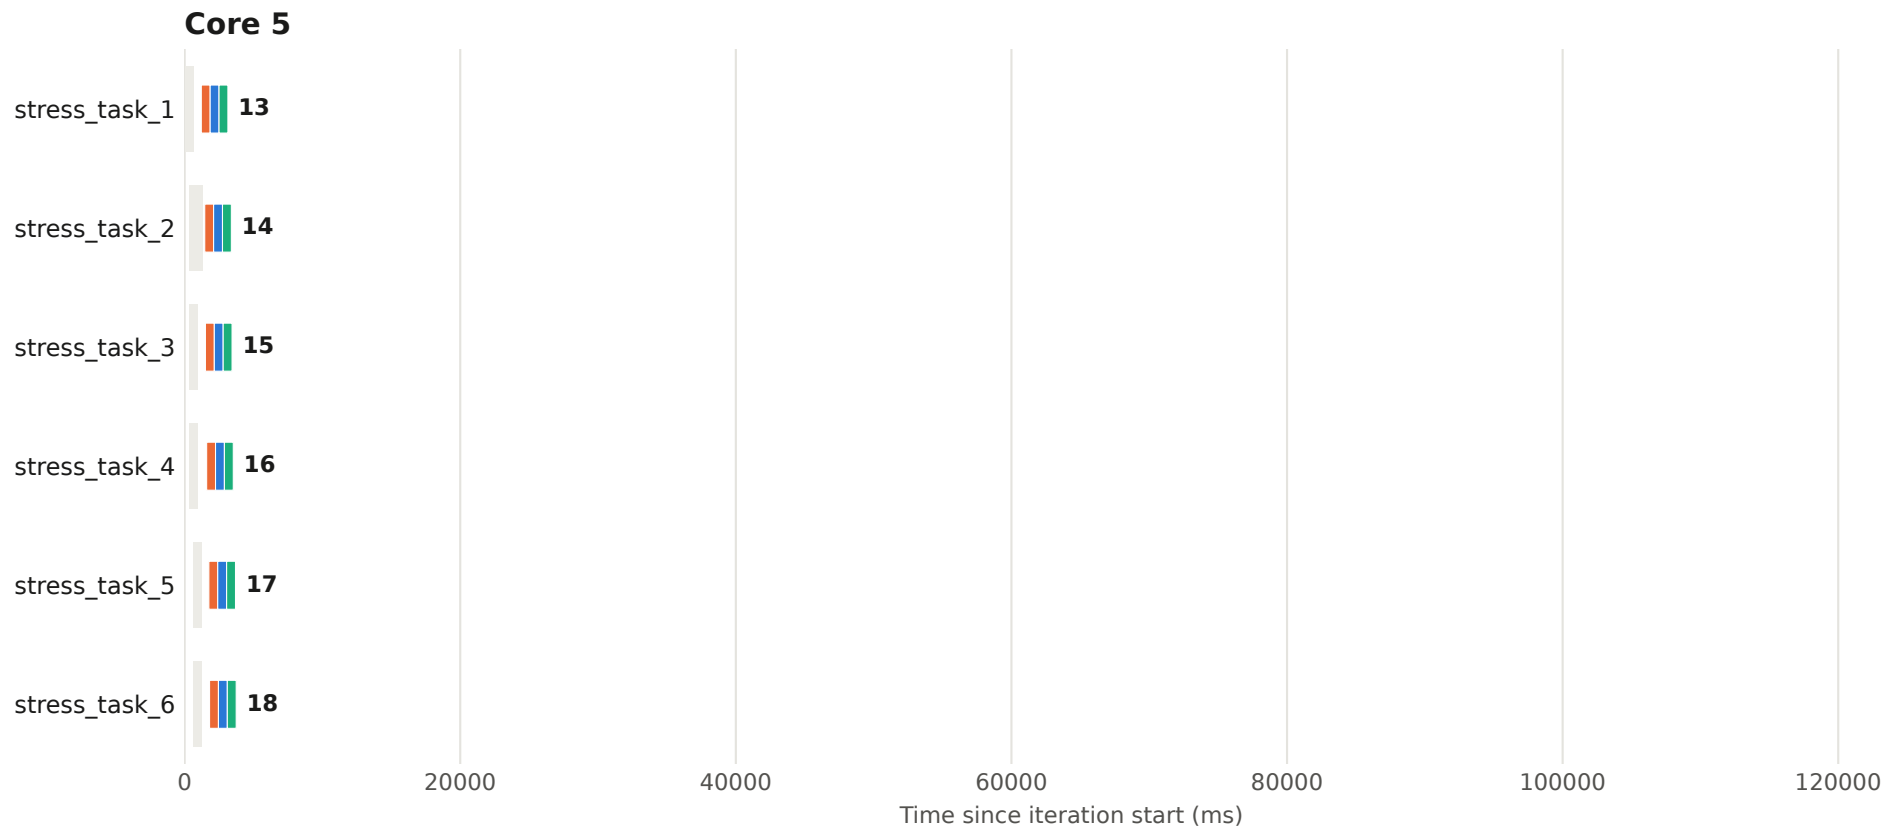


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 20 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

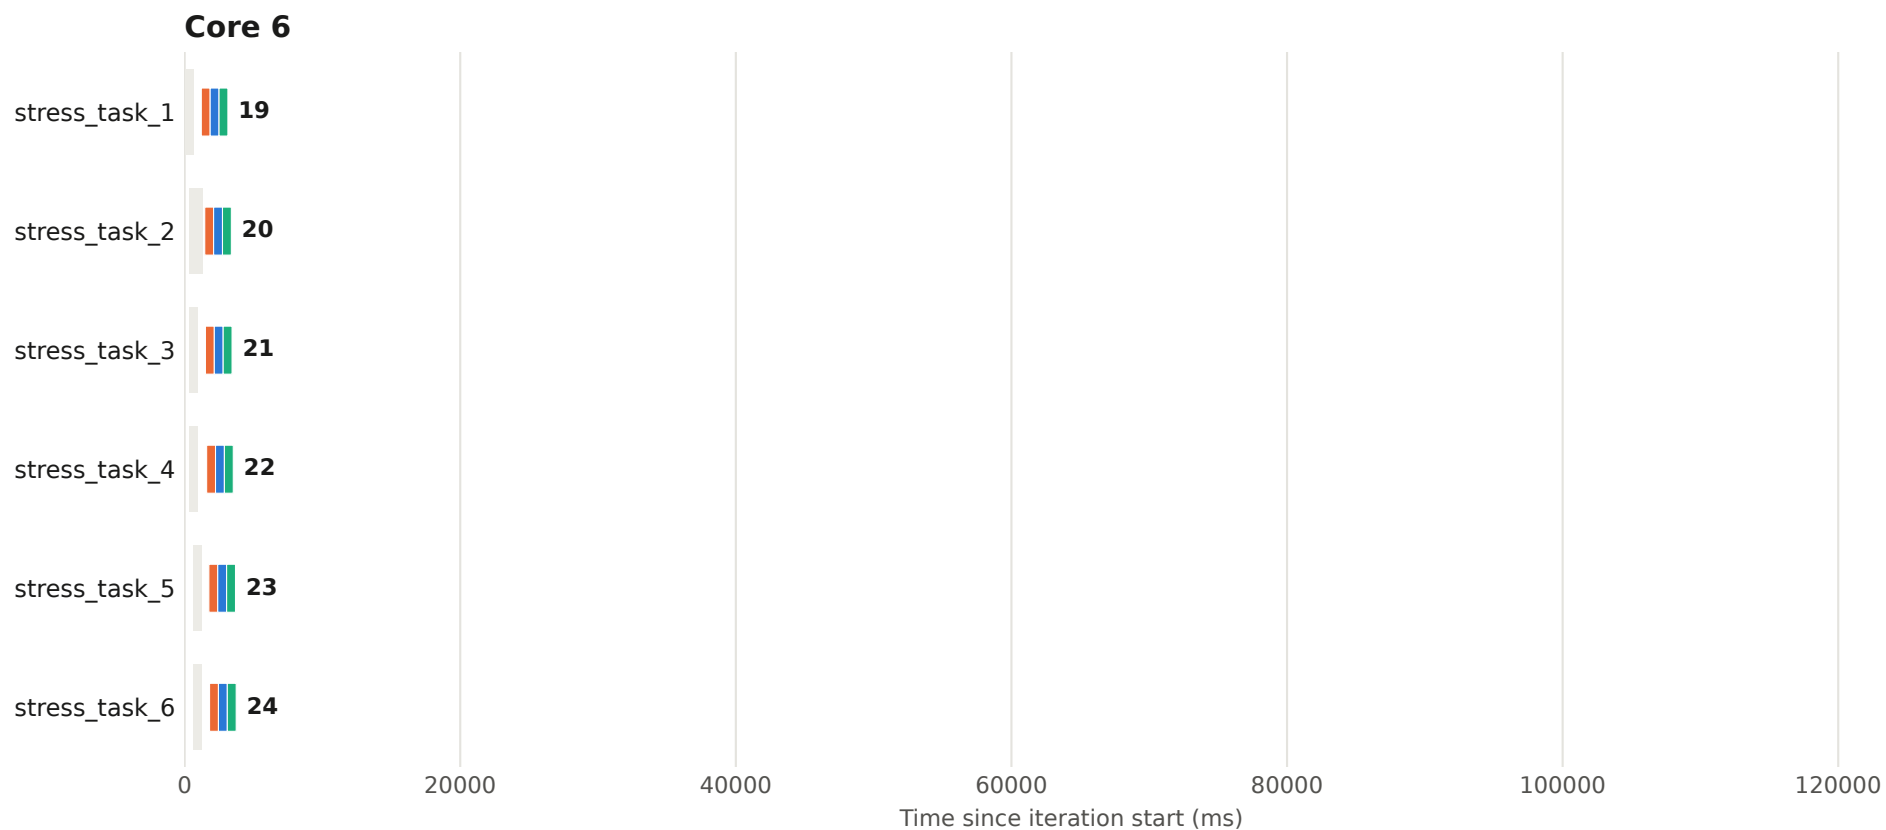


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 20 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

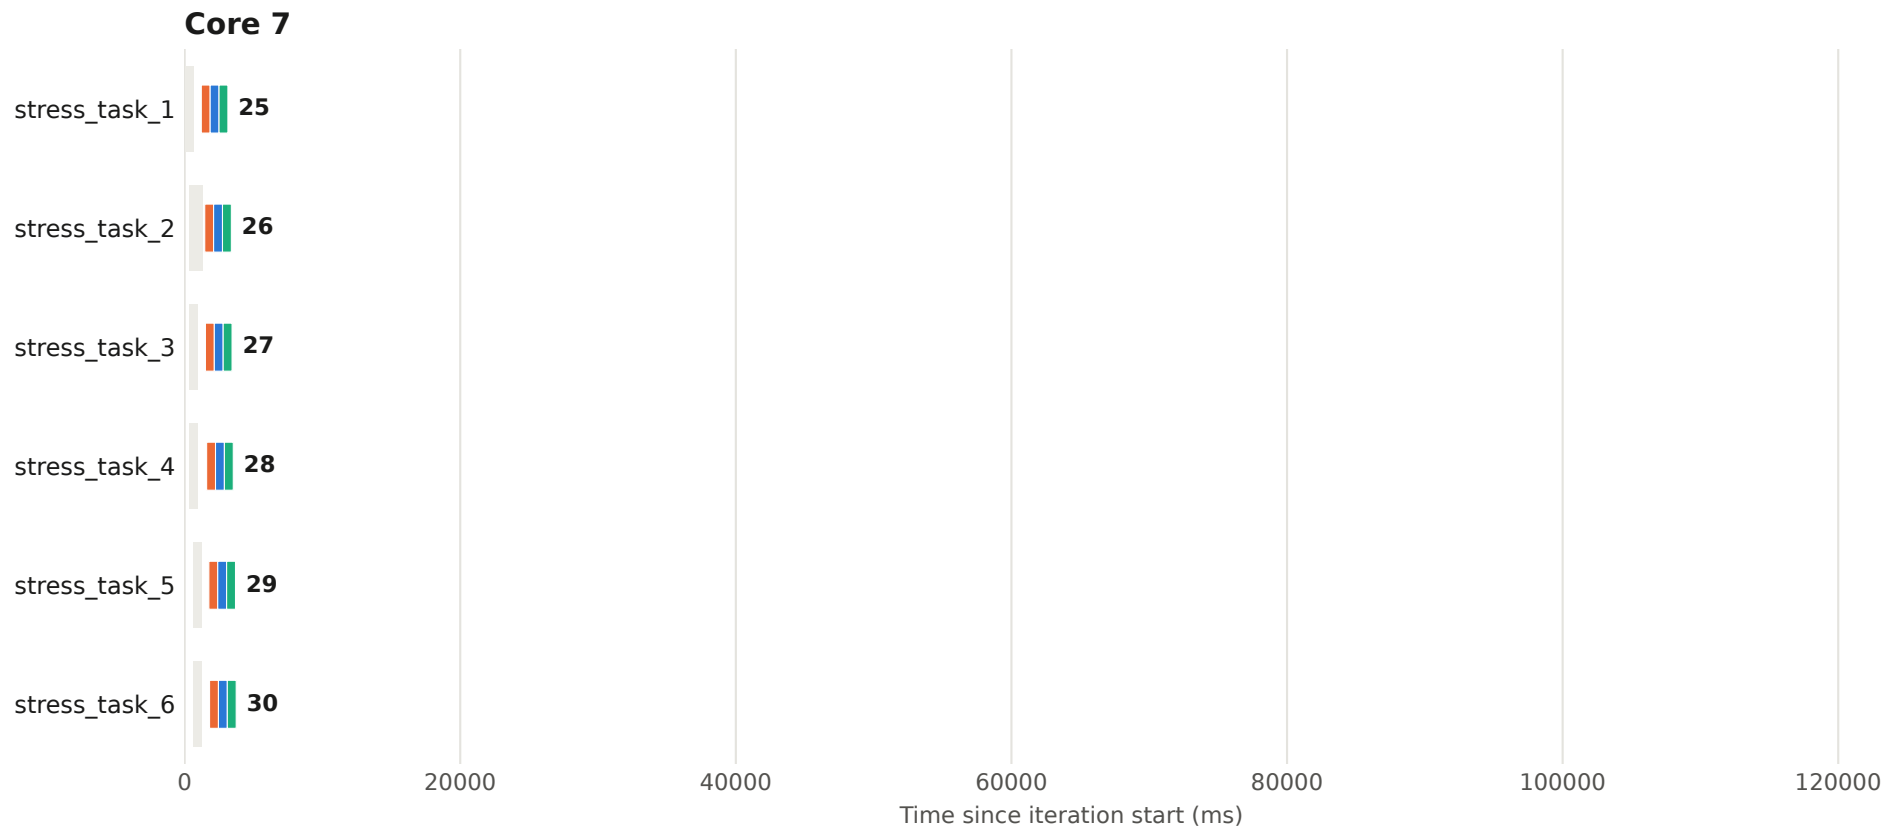


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 21 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

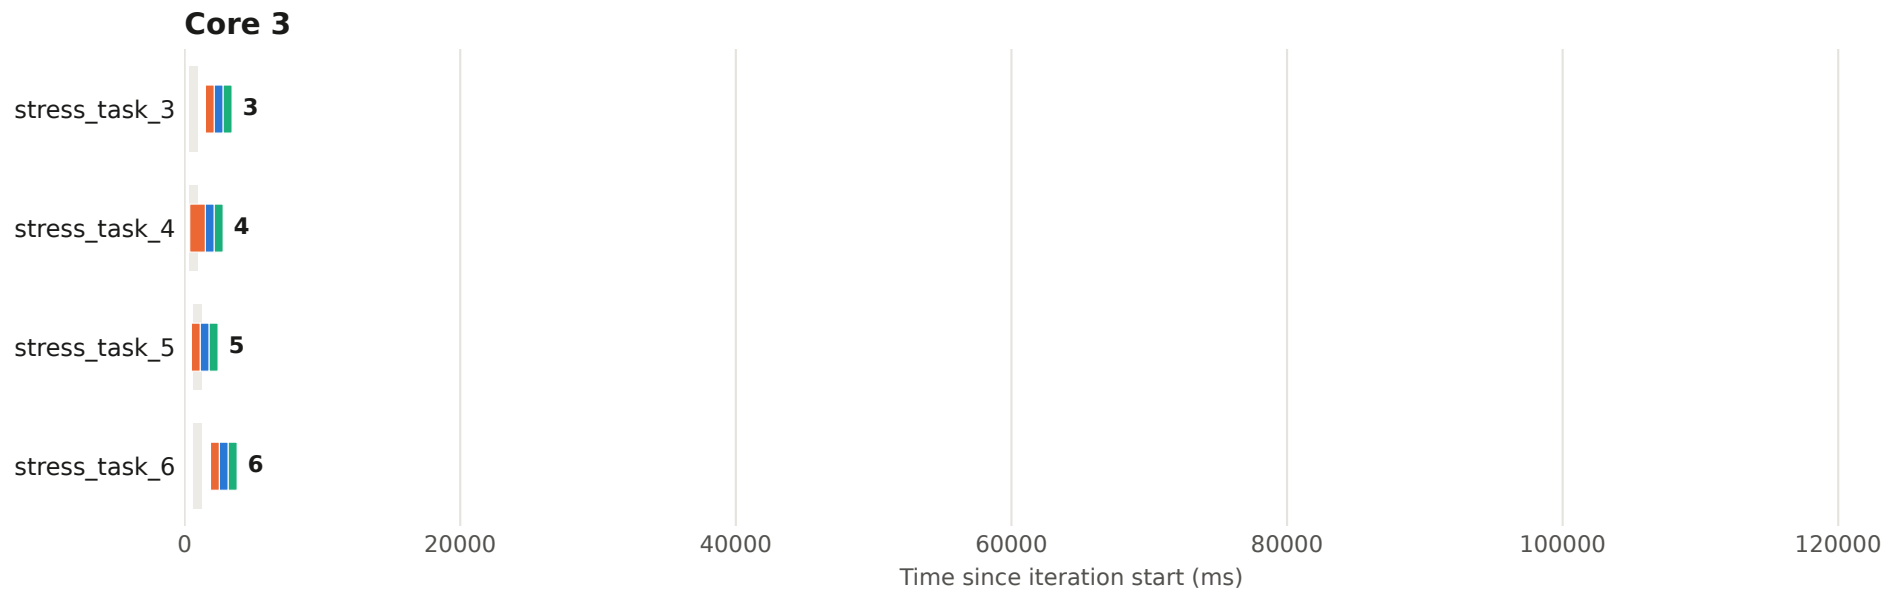

Execution plan - iteration 21 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

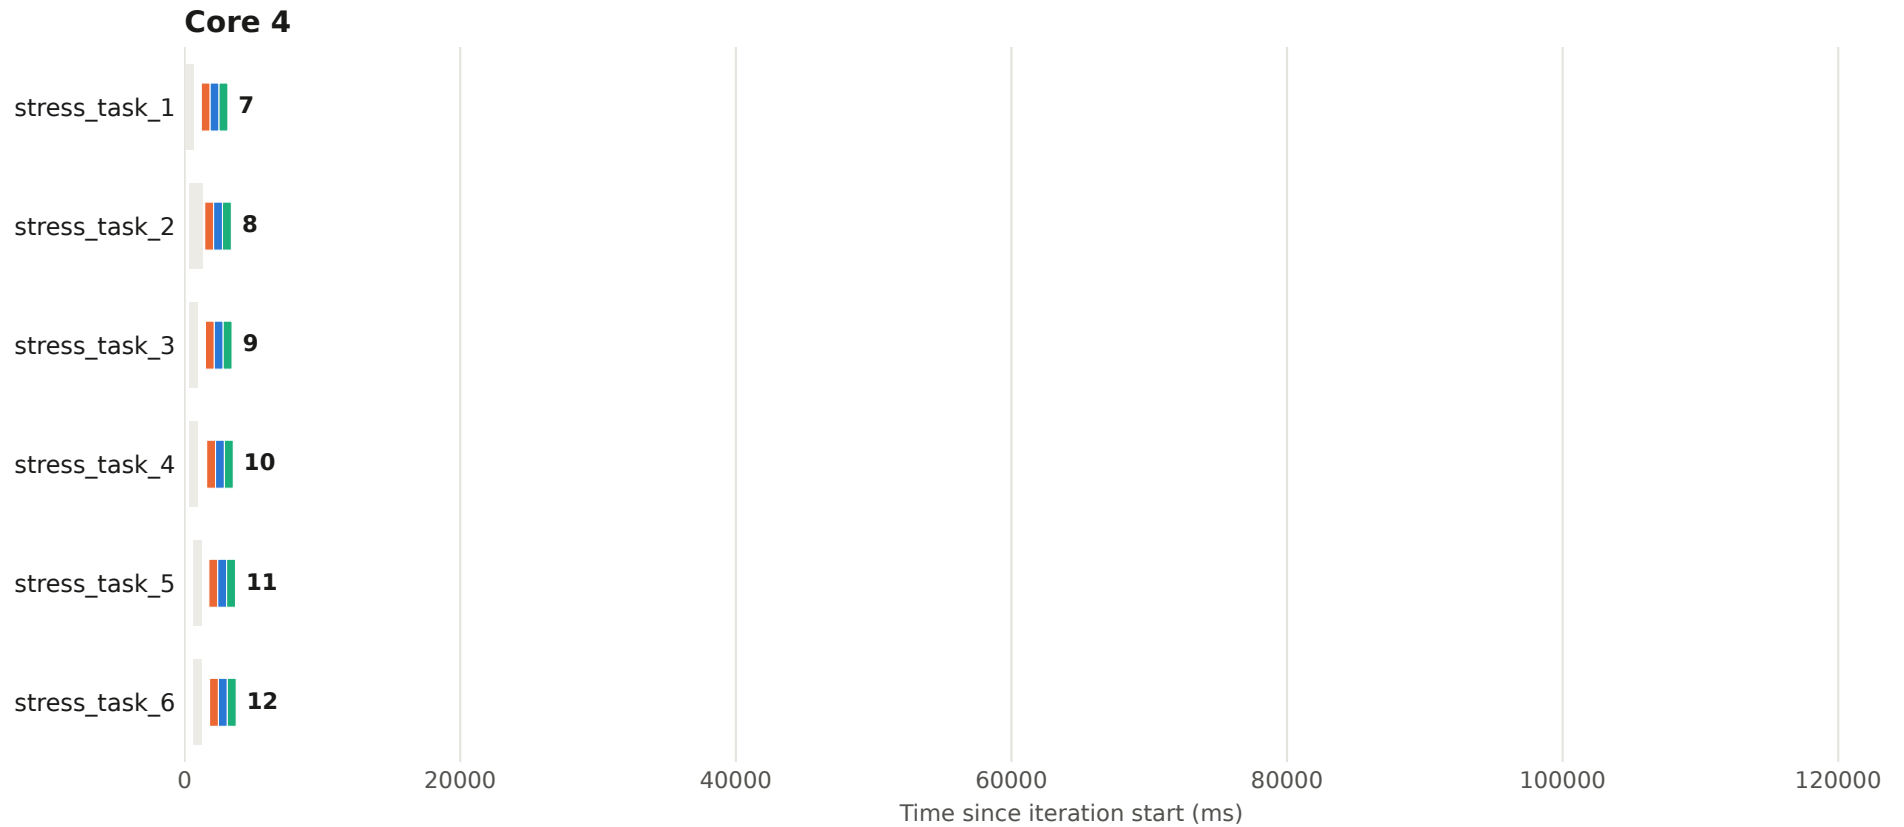


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 21 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

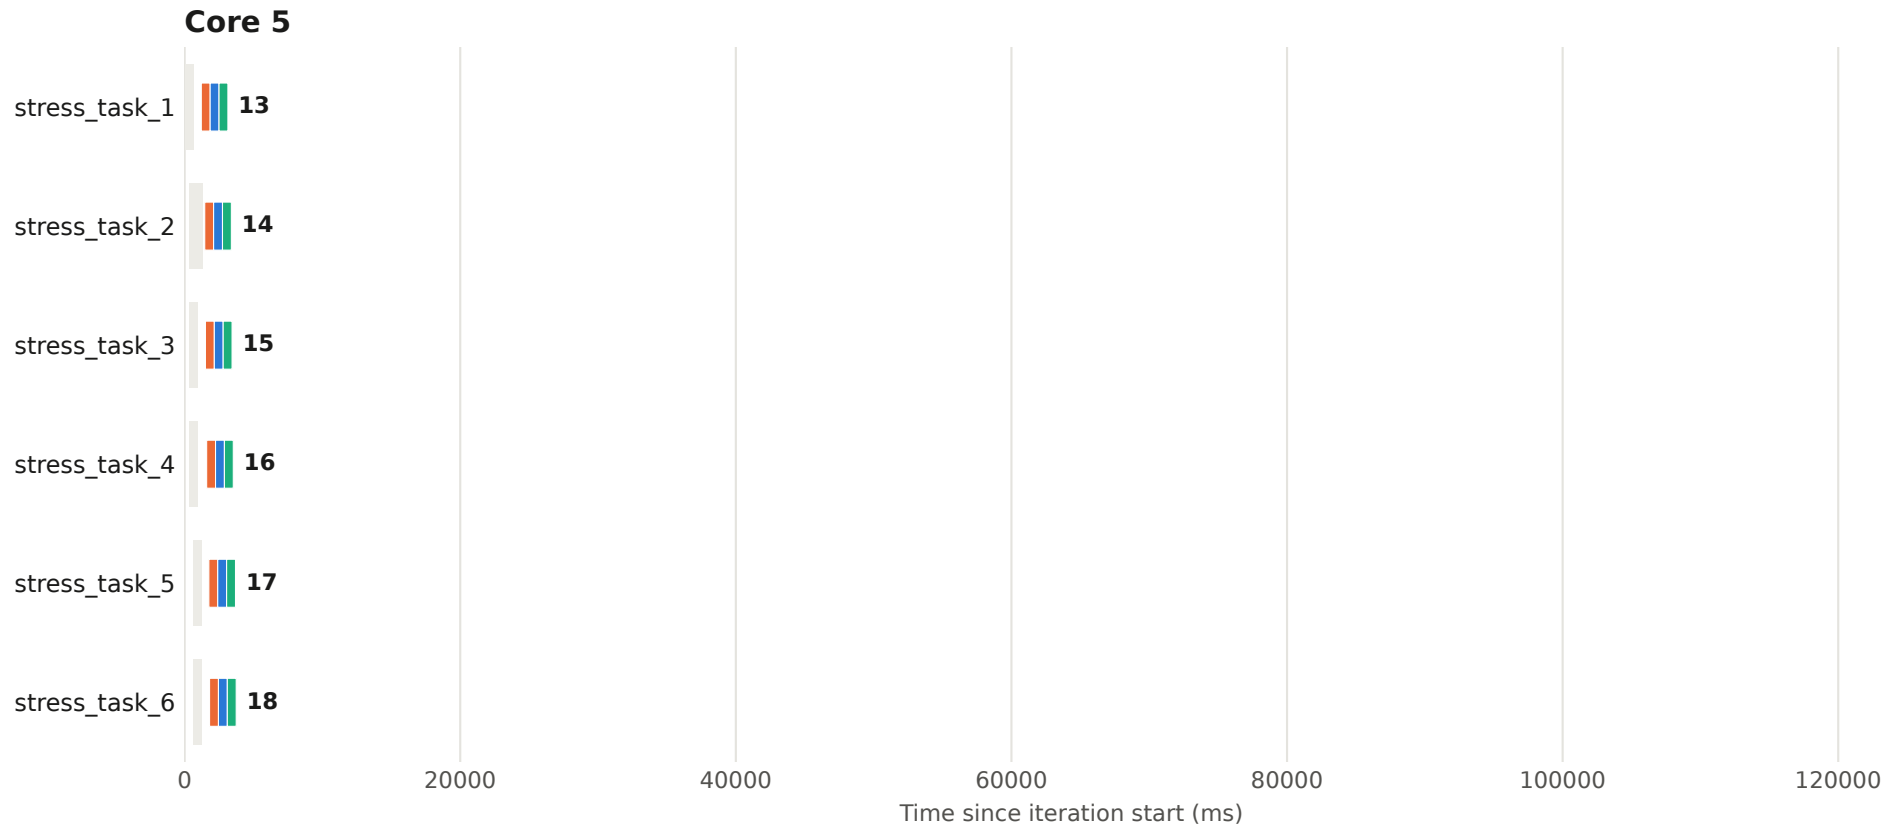


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 21 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

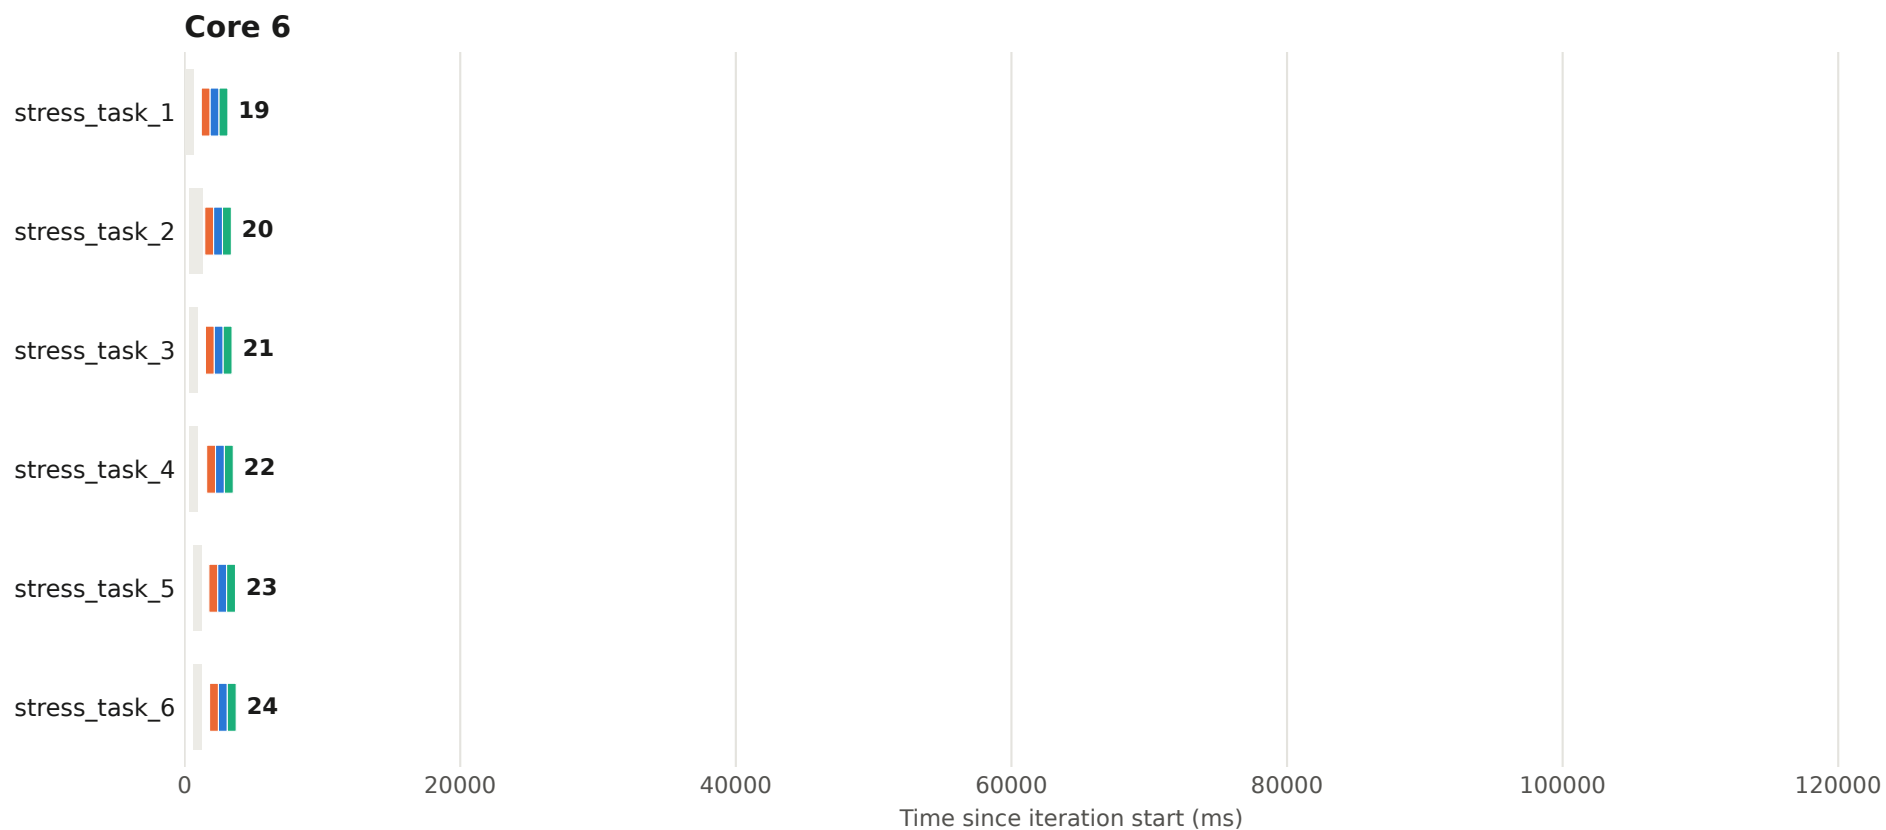


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 21 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

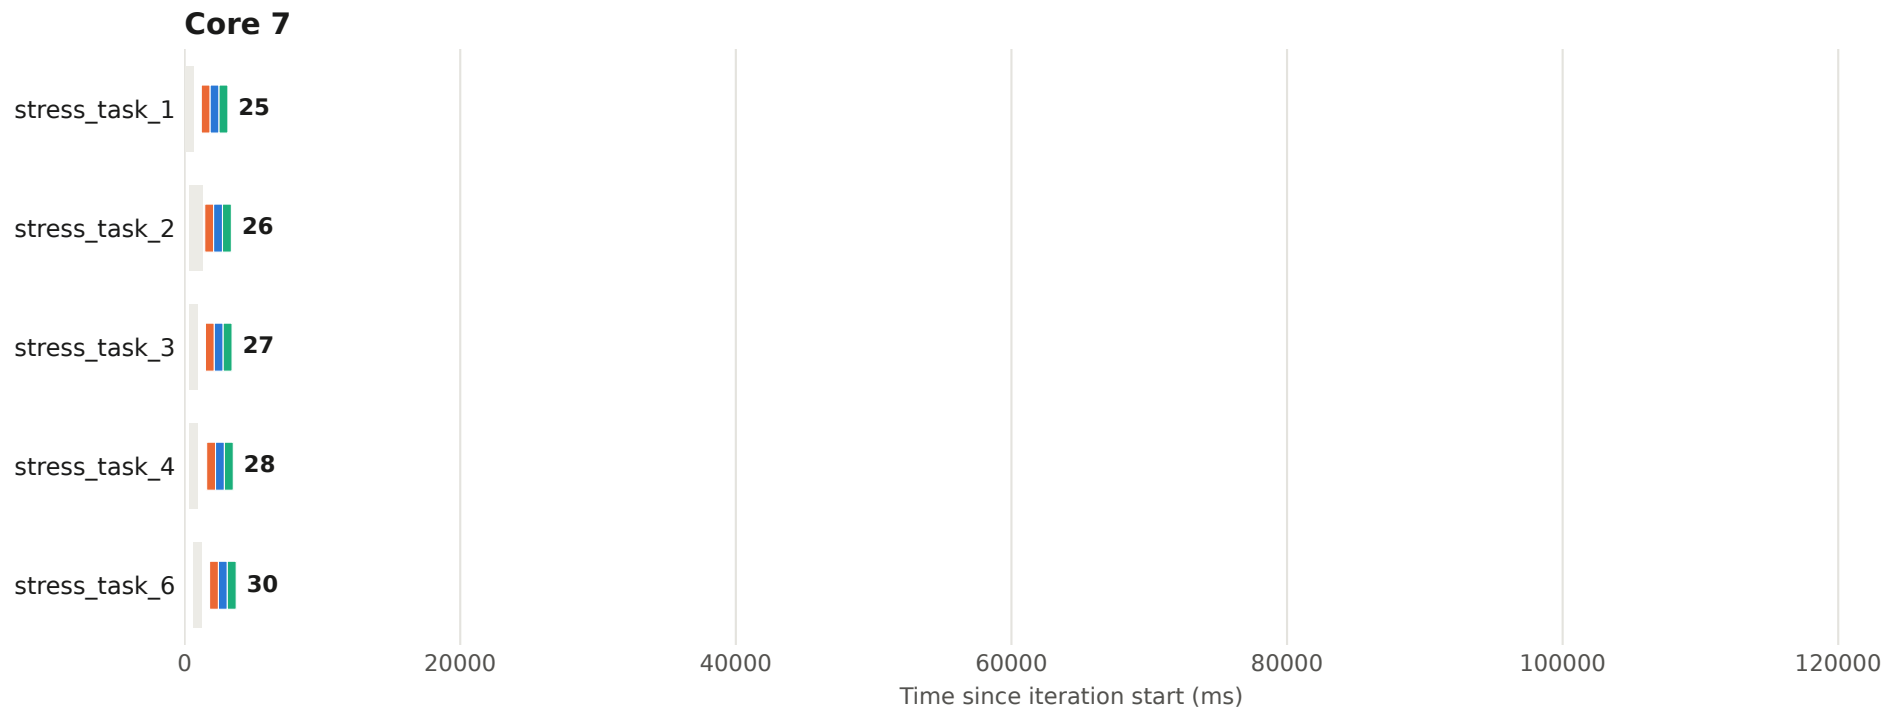


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 22 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

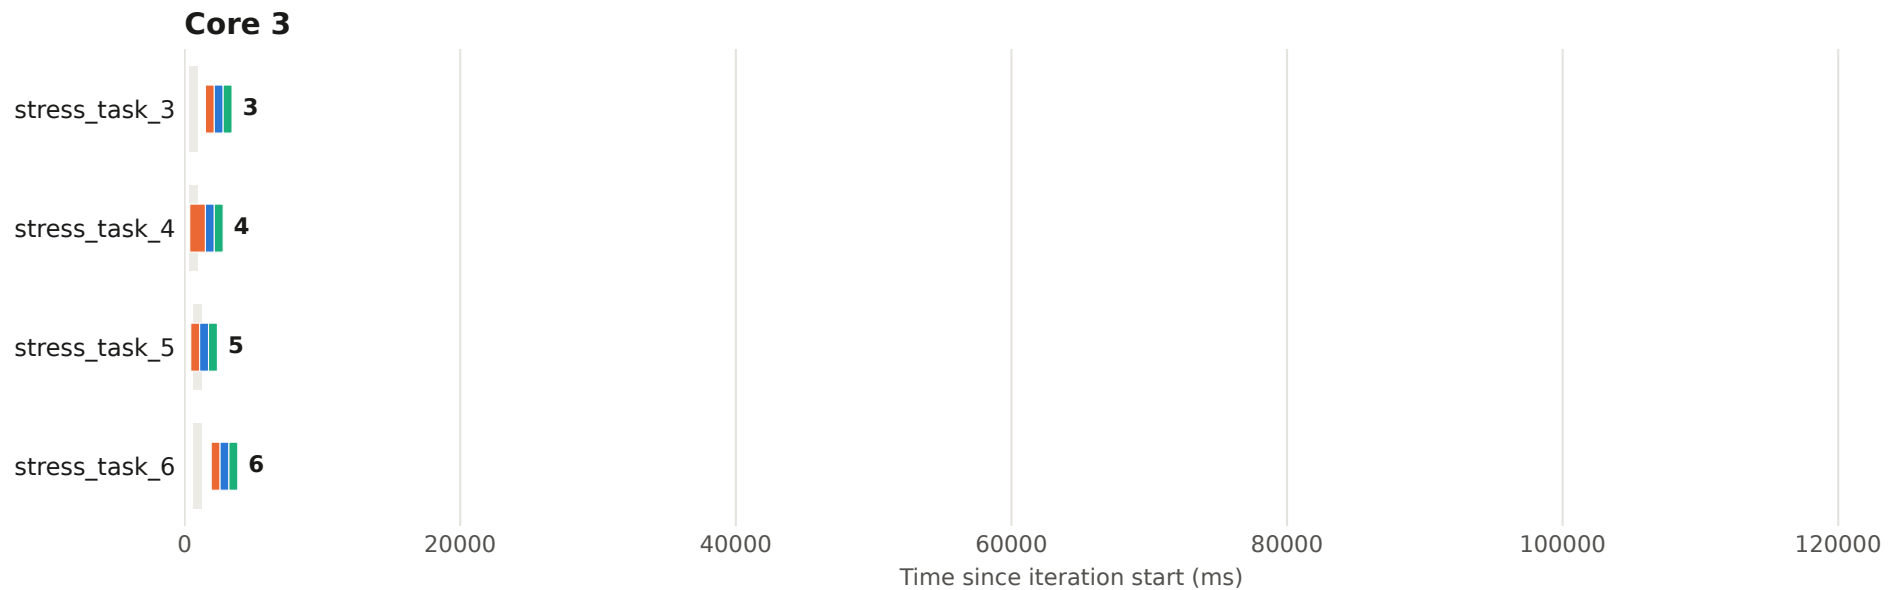


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 22 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

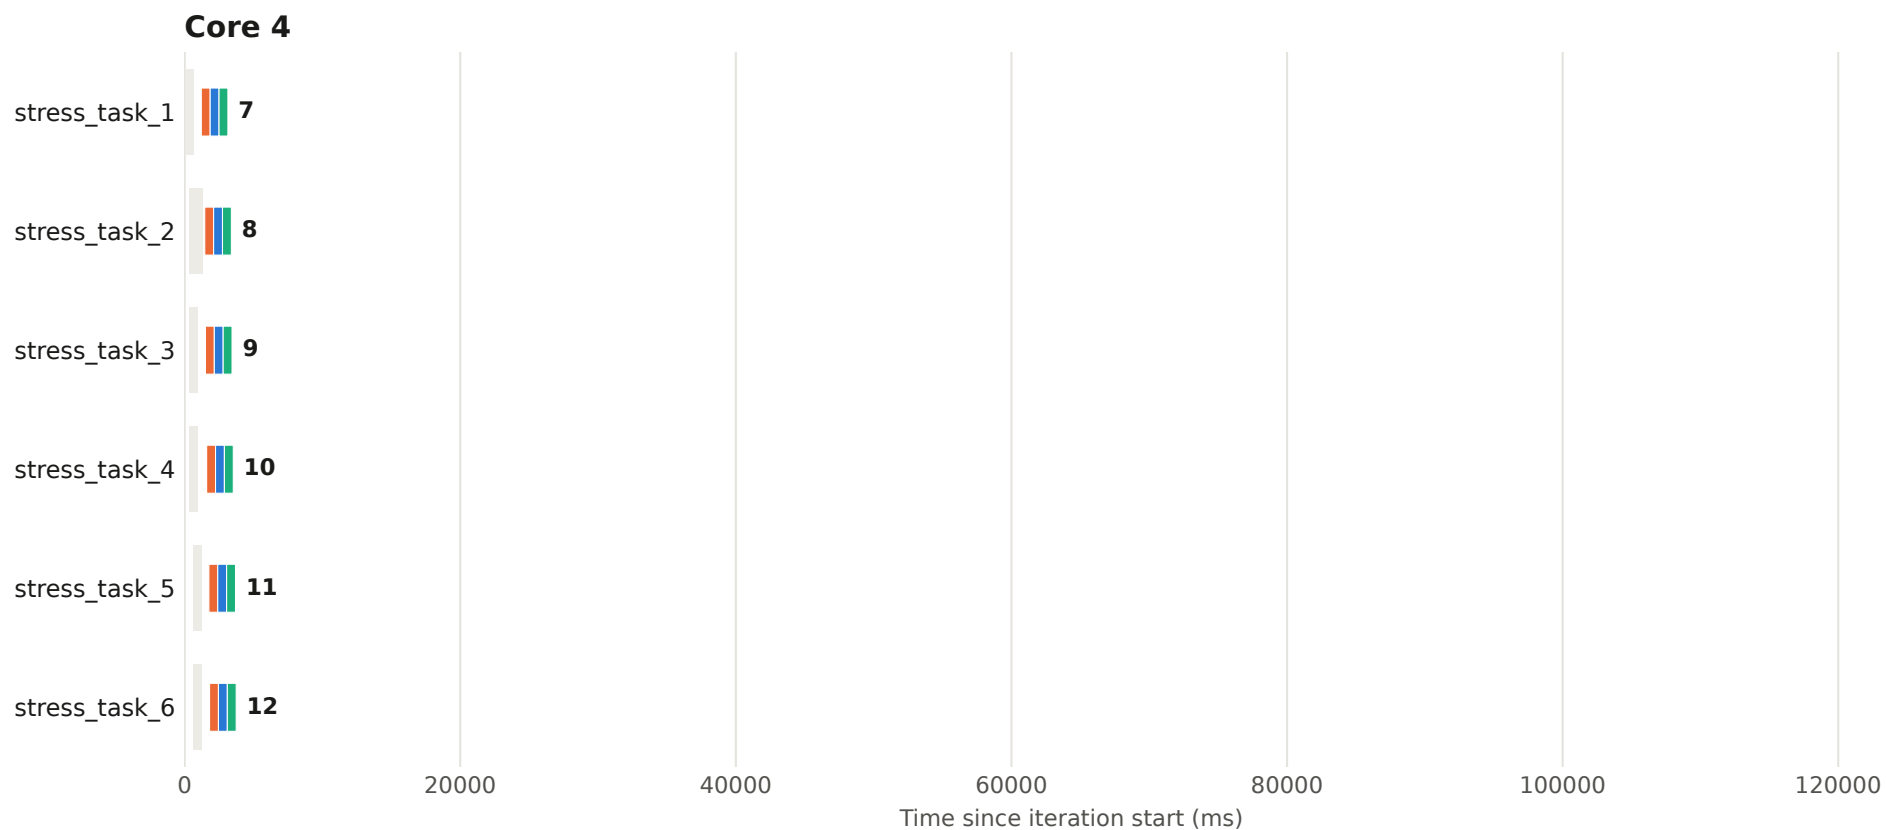


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 22 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

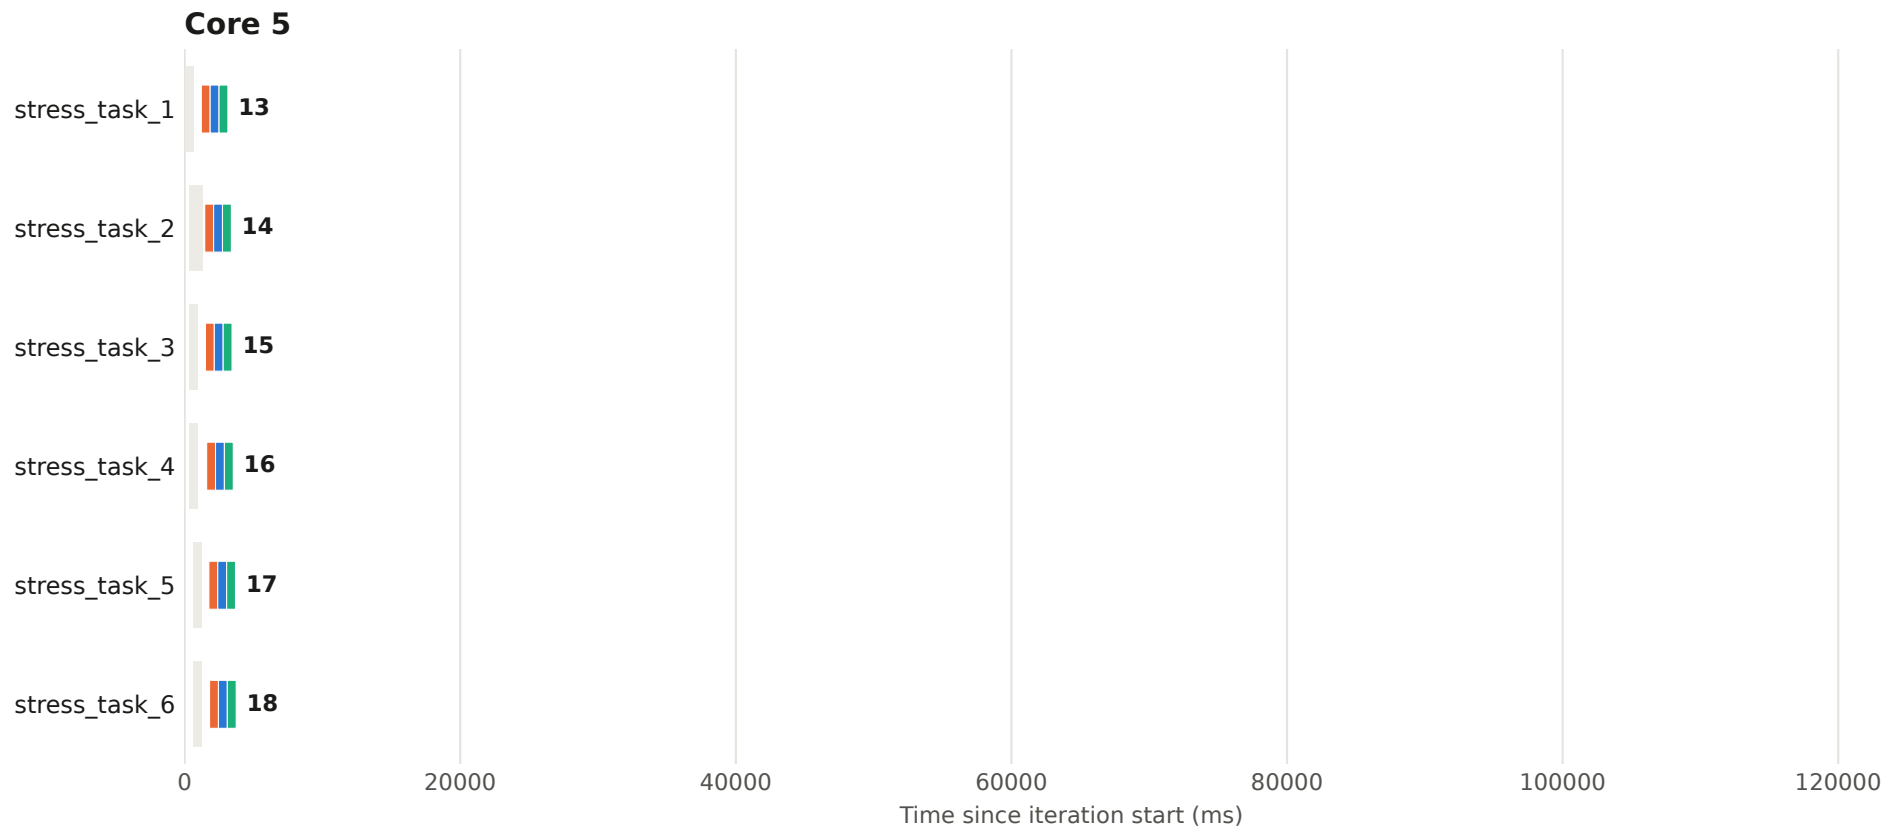


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 22 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

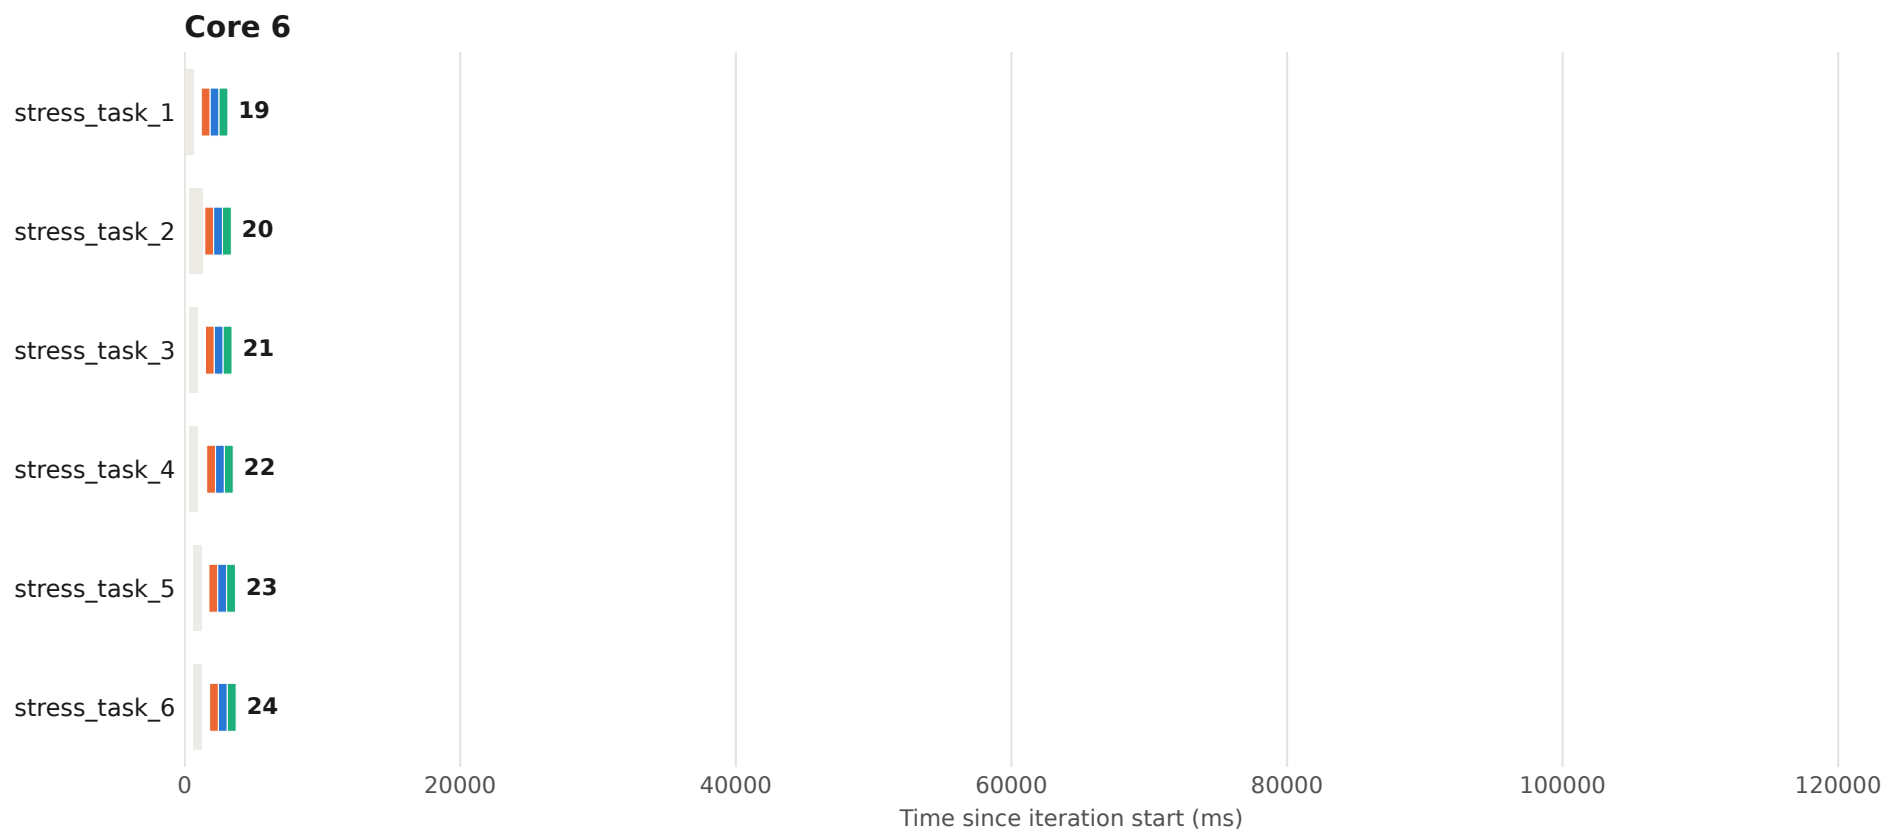


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 22 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

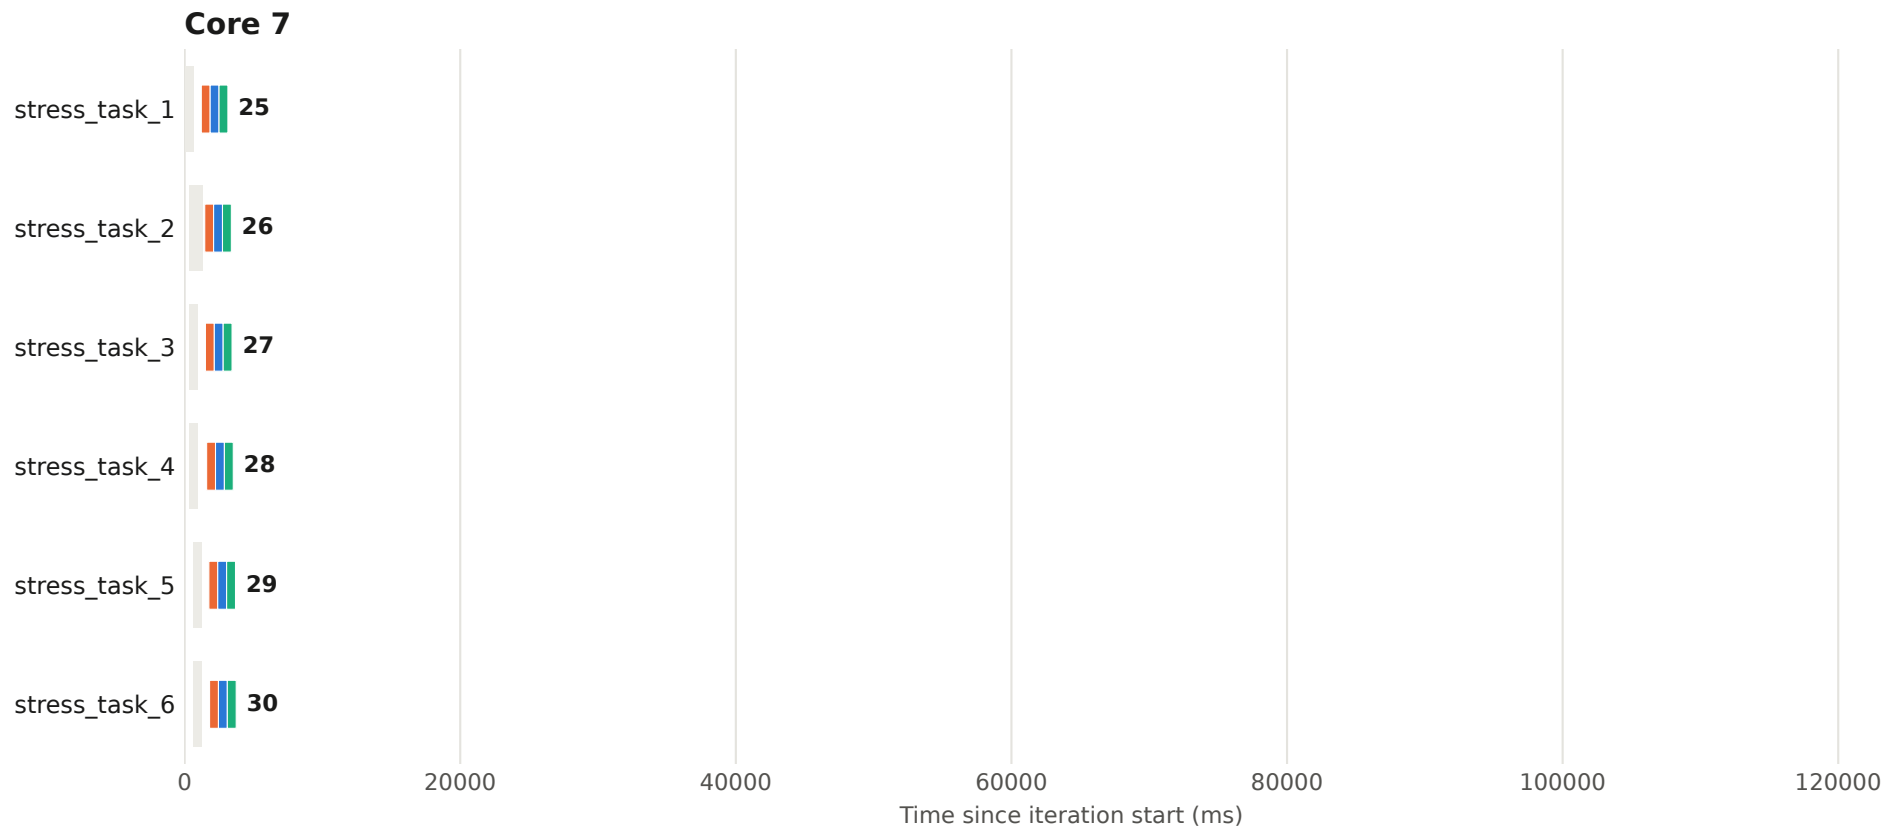


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 23 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

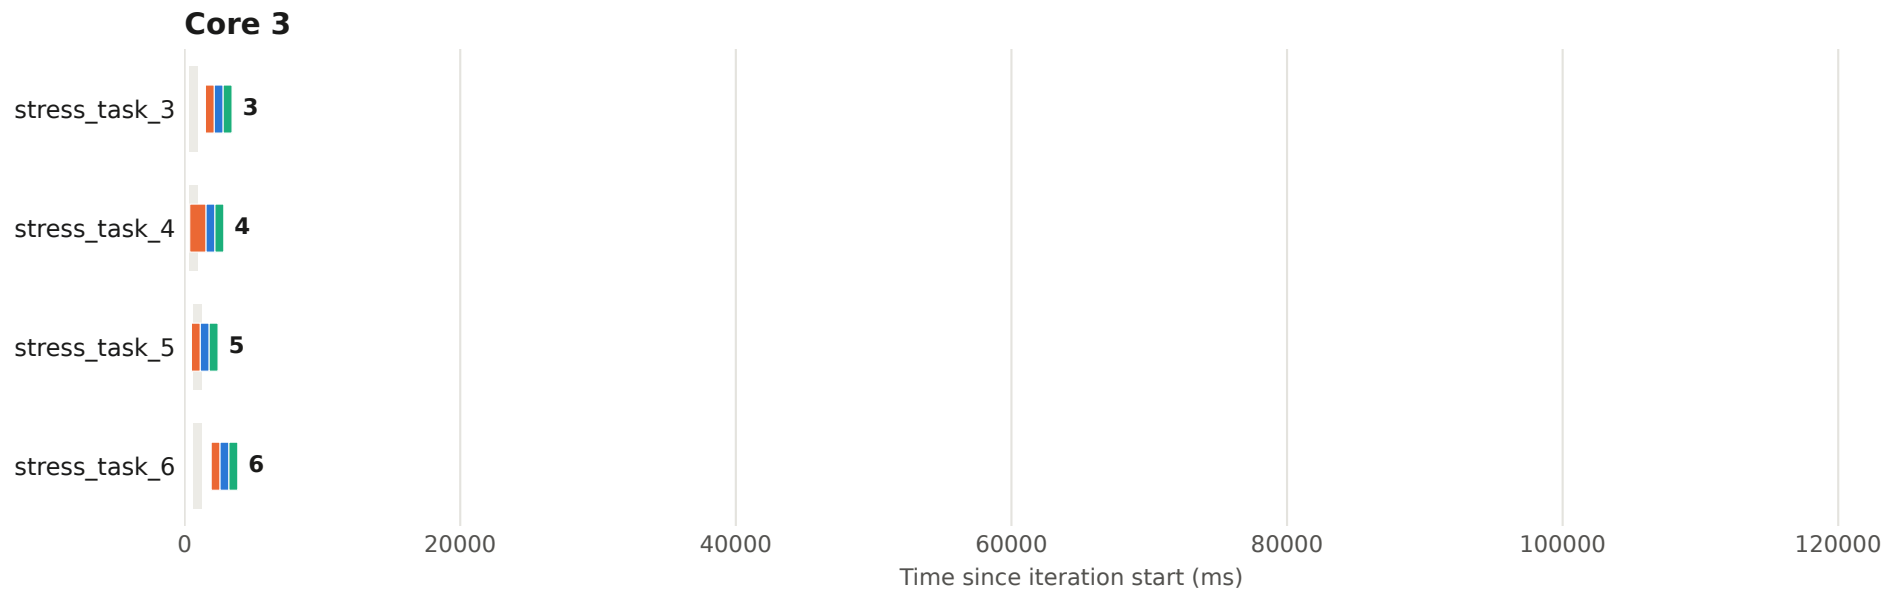


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 23 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

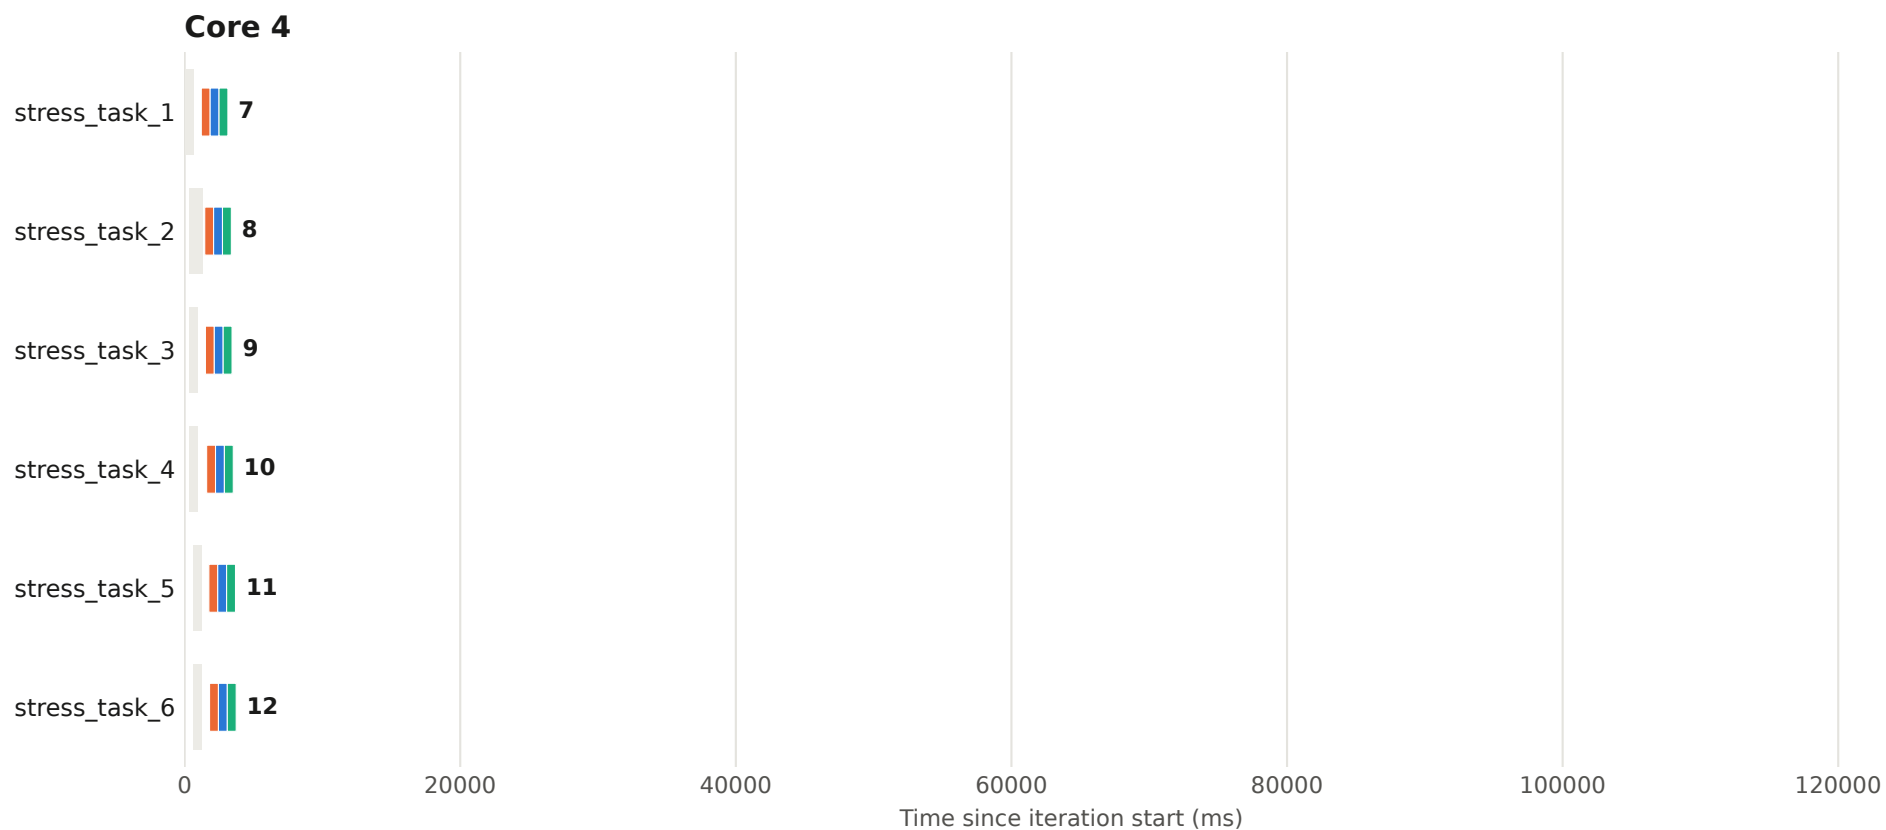


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 23 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

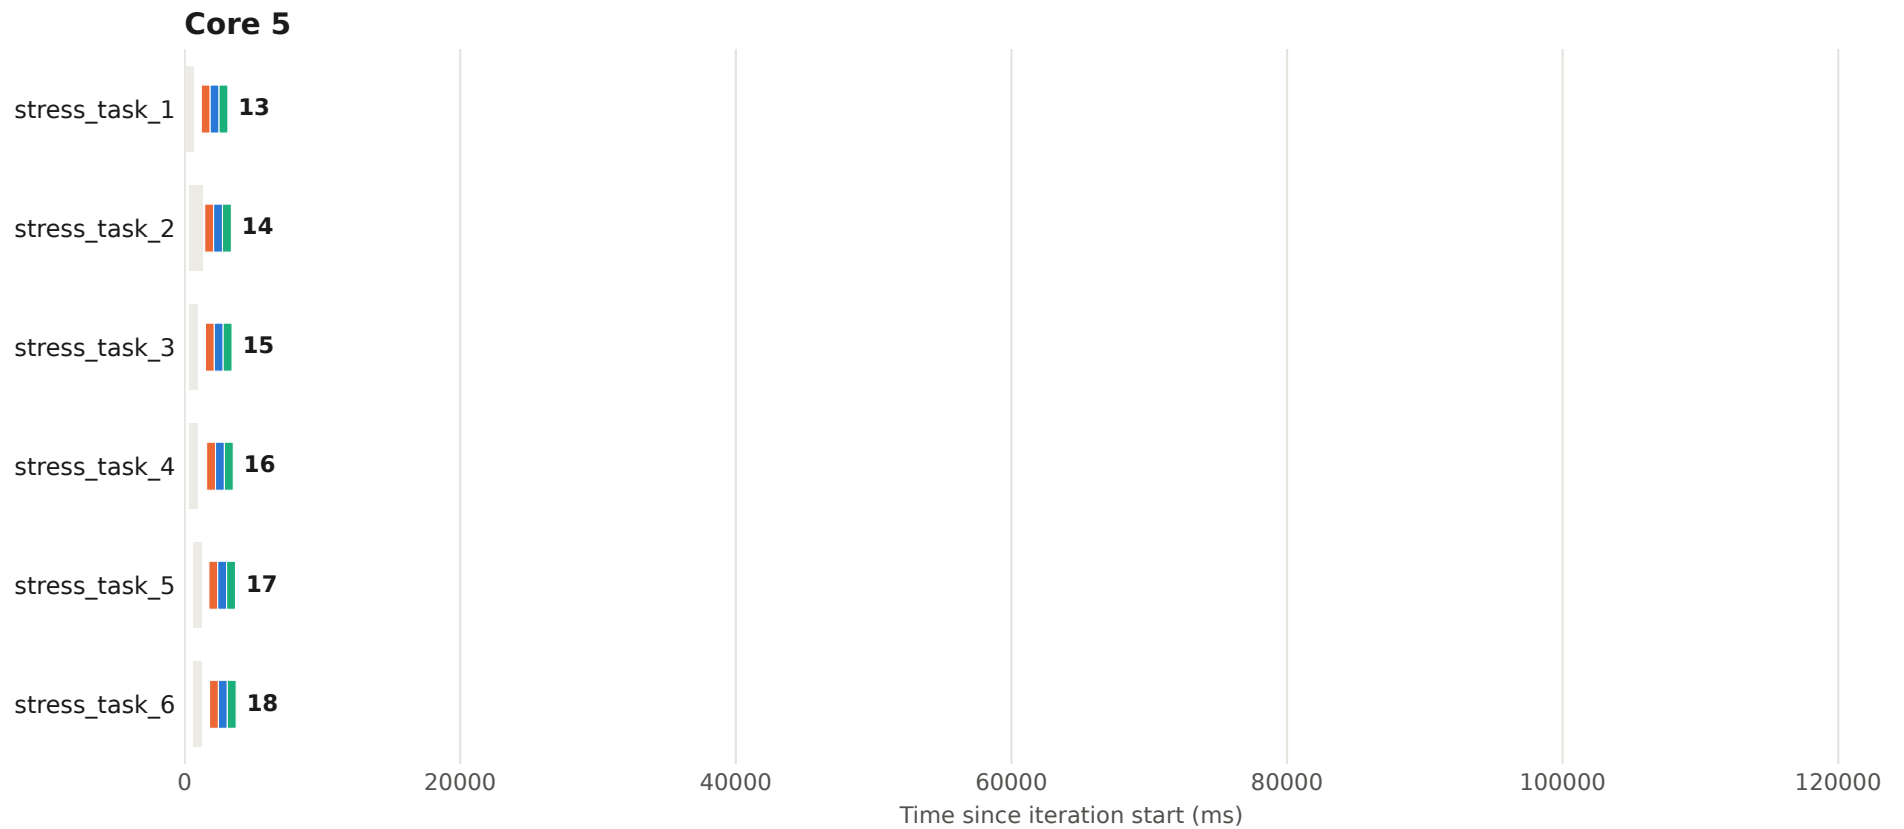


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 23 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

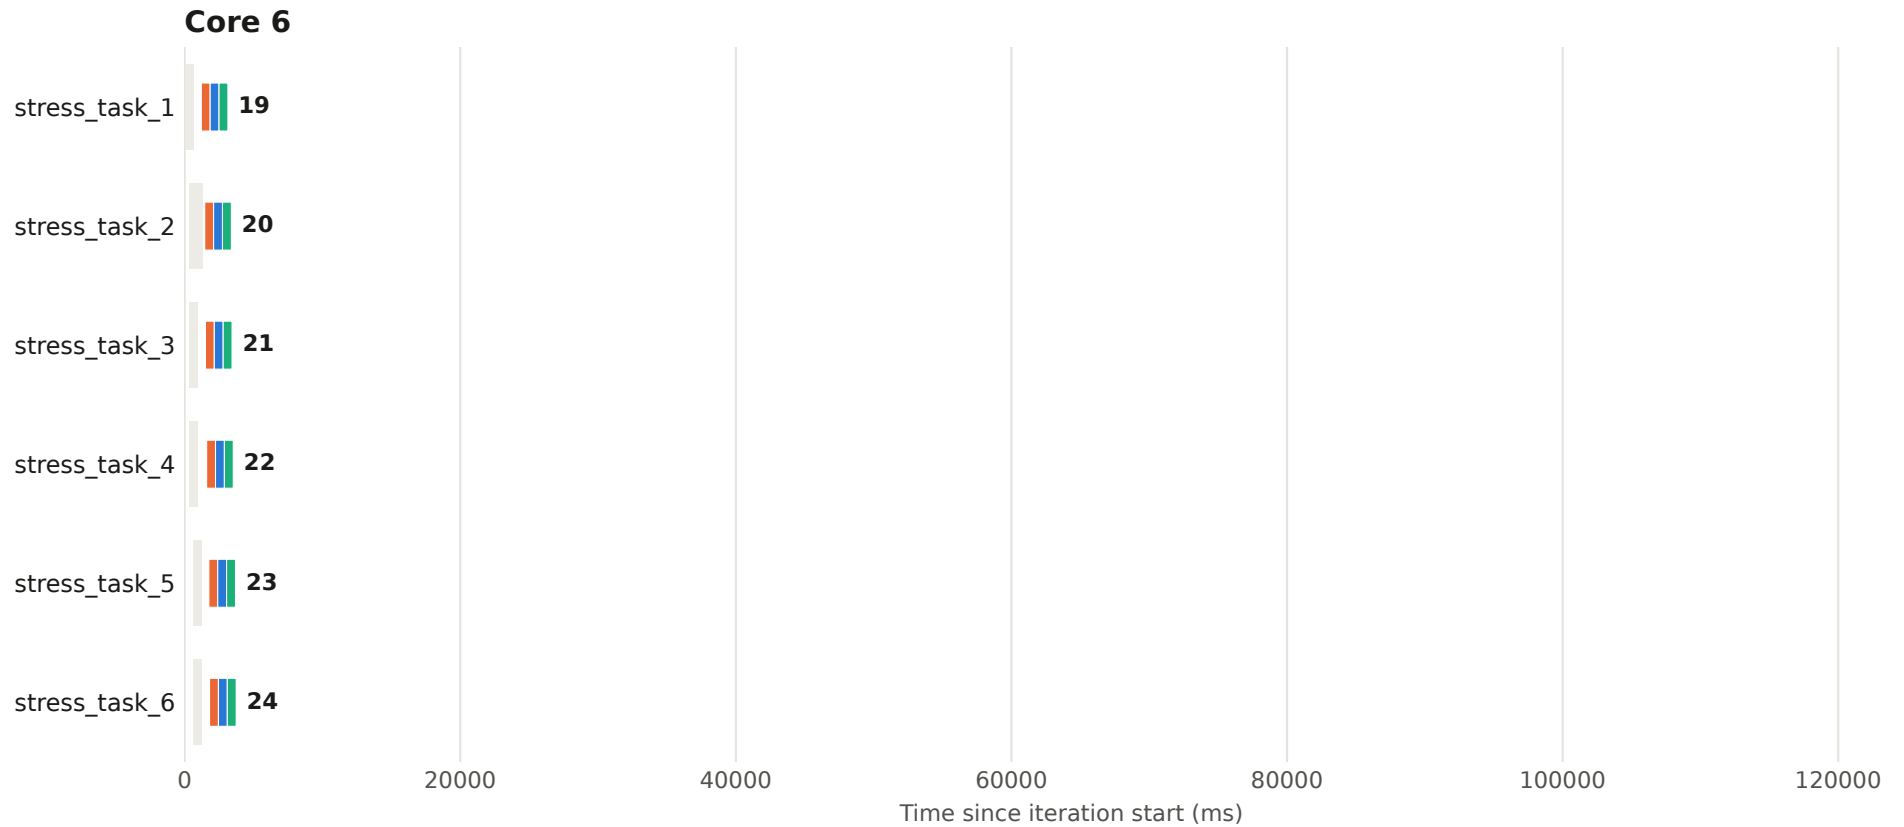


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 23 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

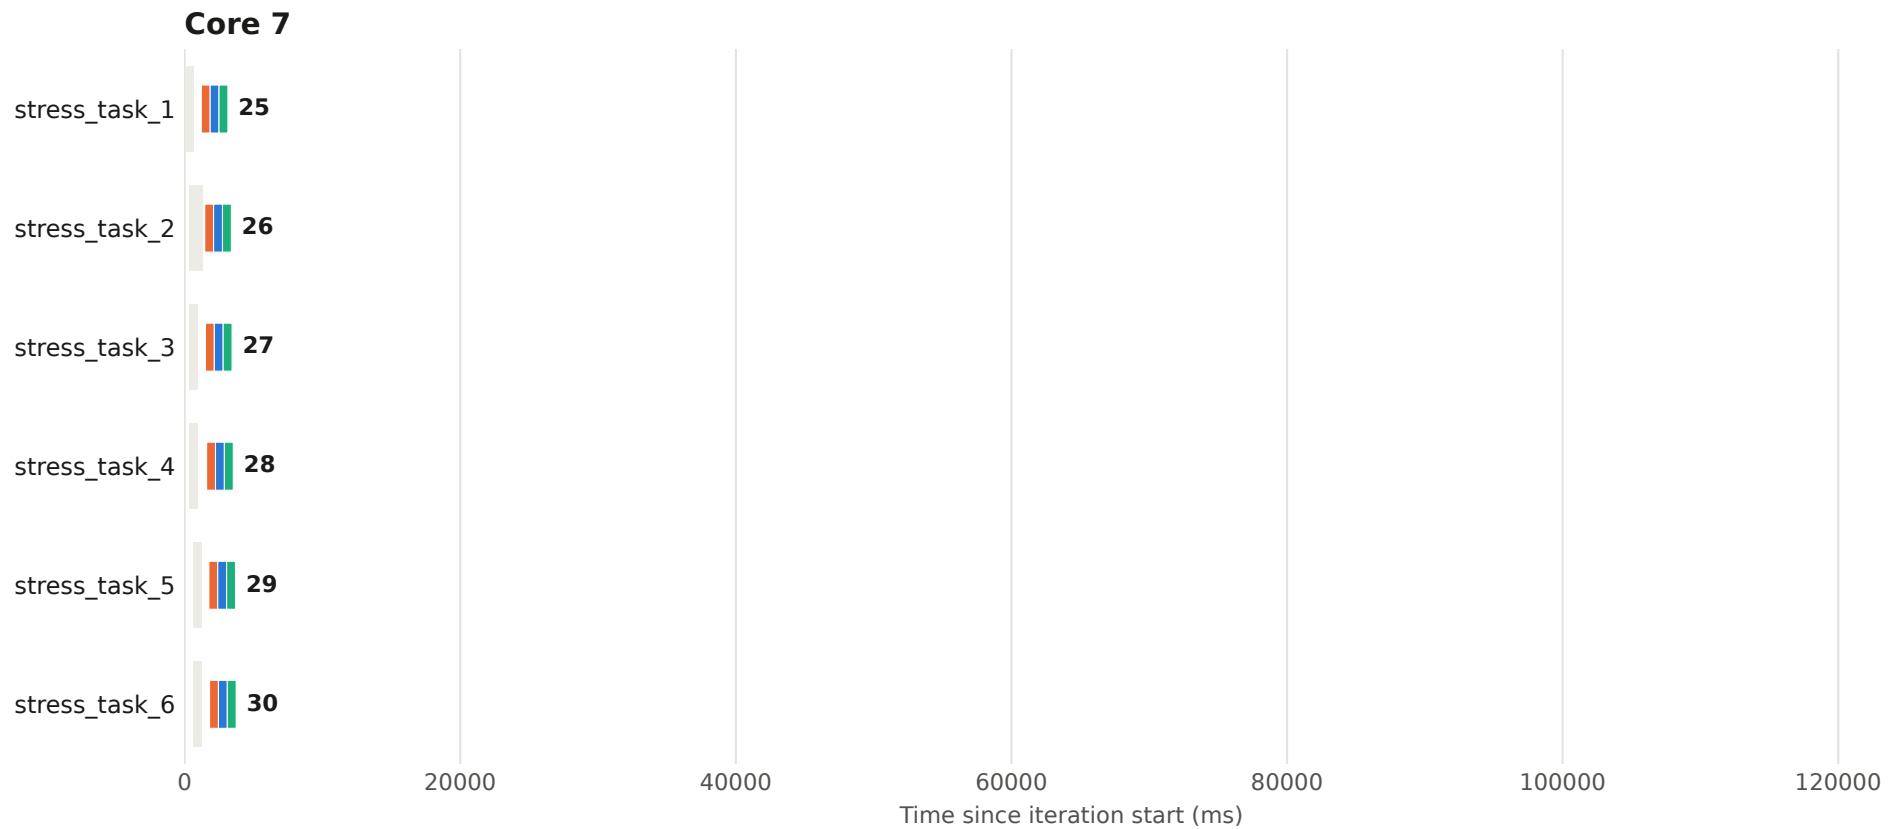


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 24 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

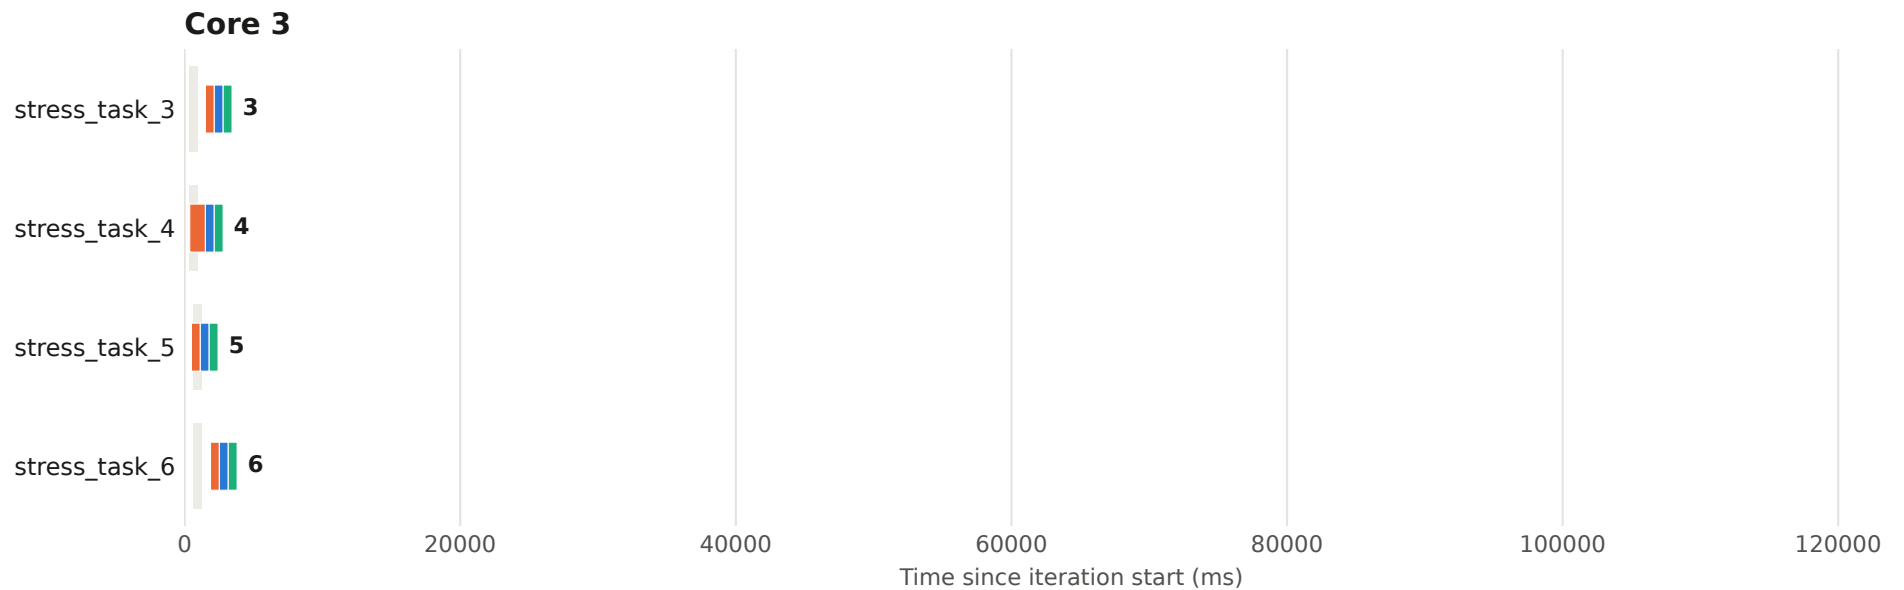


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 24 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

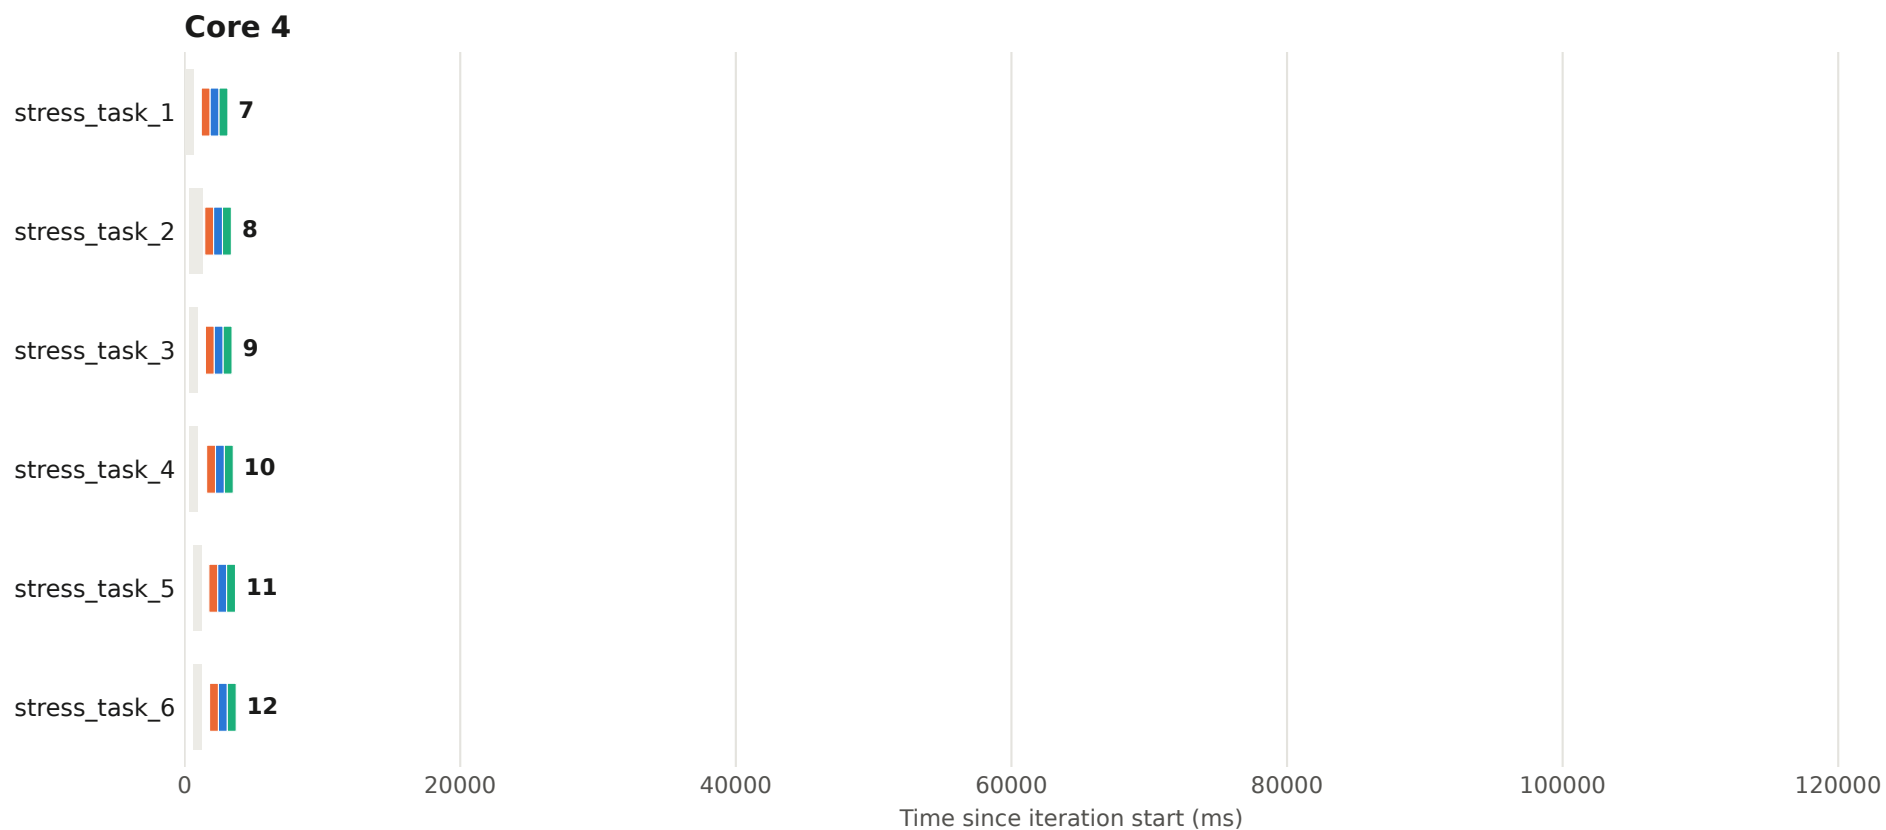


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 24 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

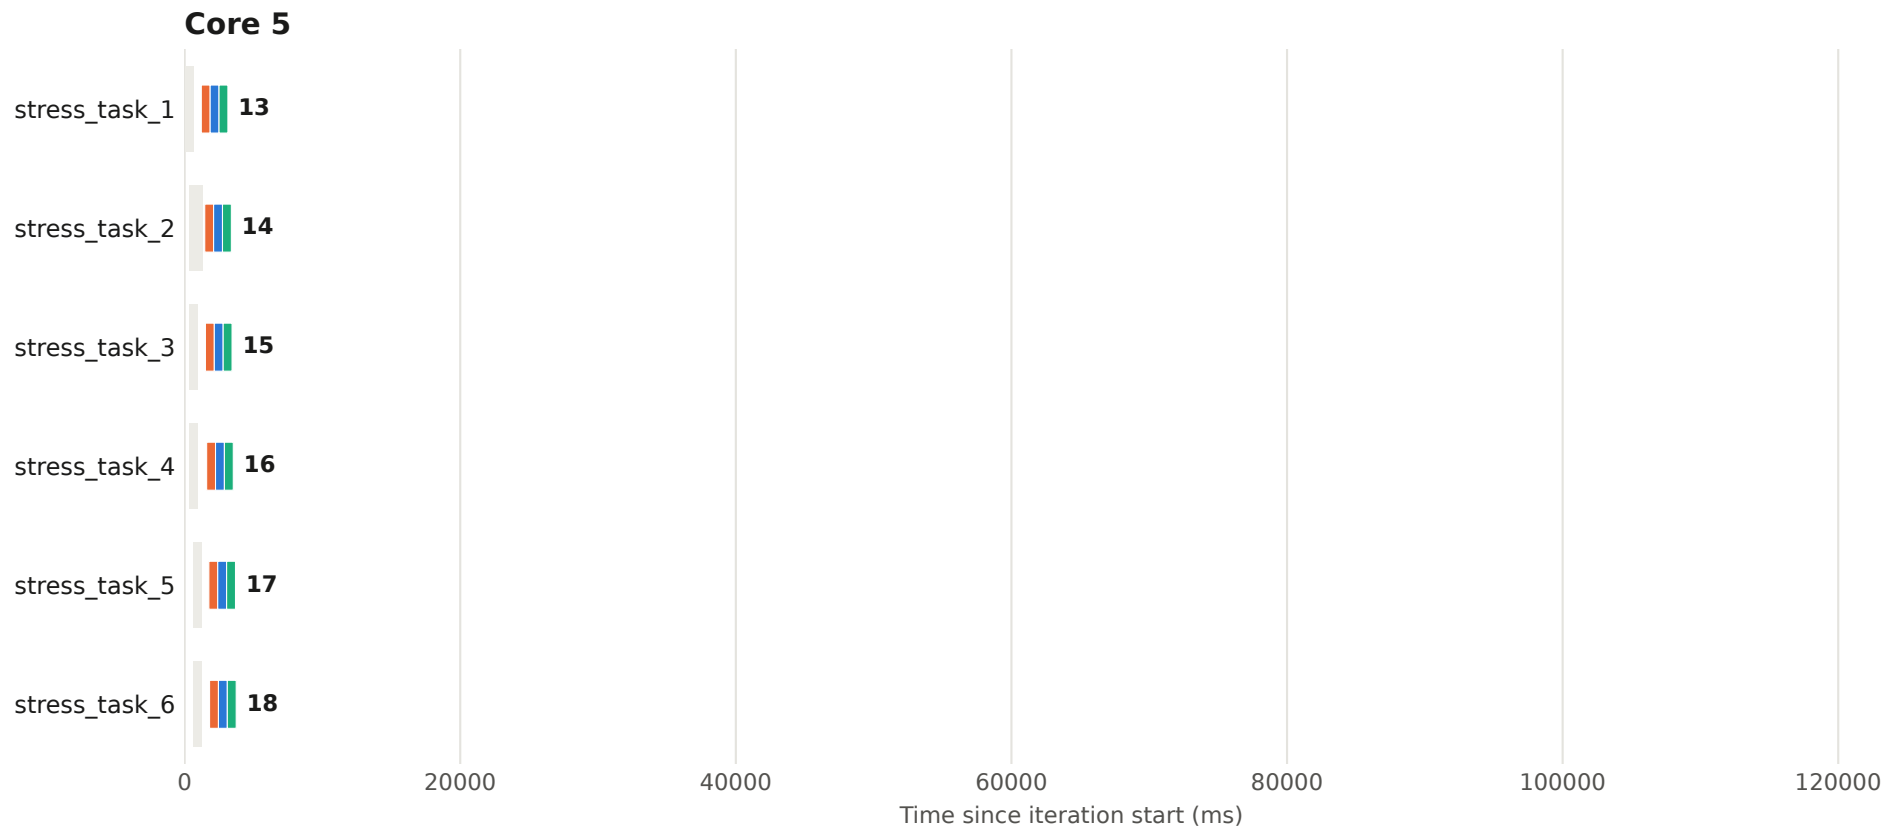


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 24 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

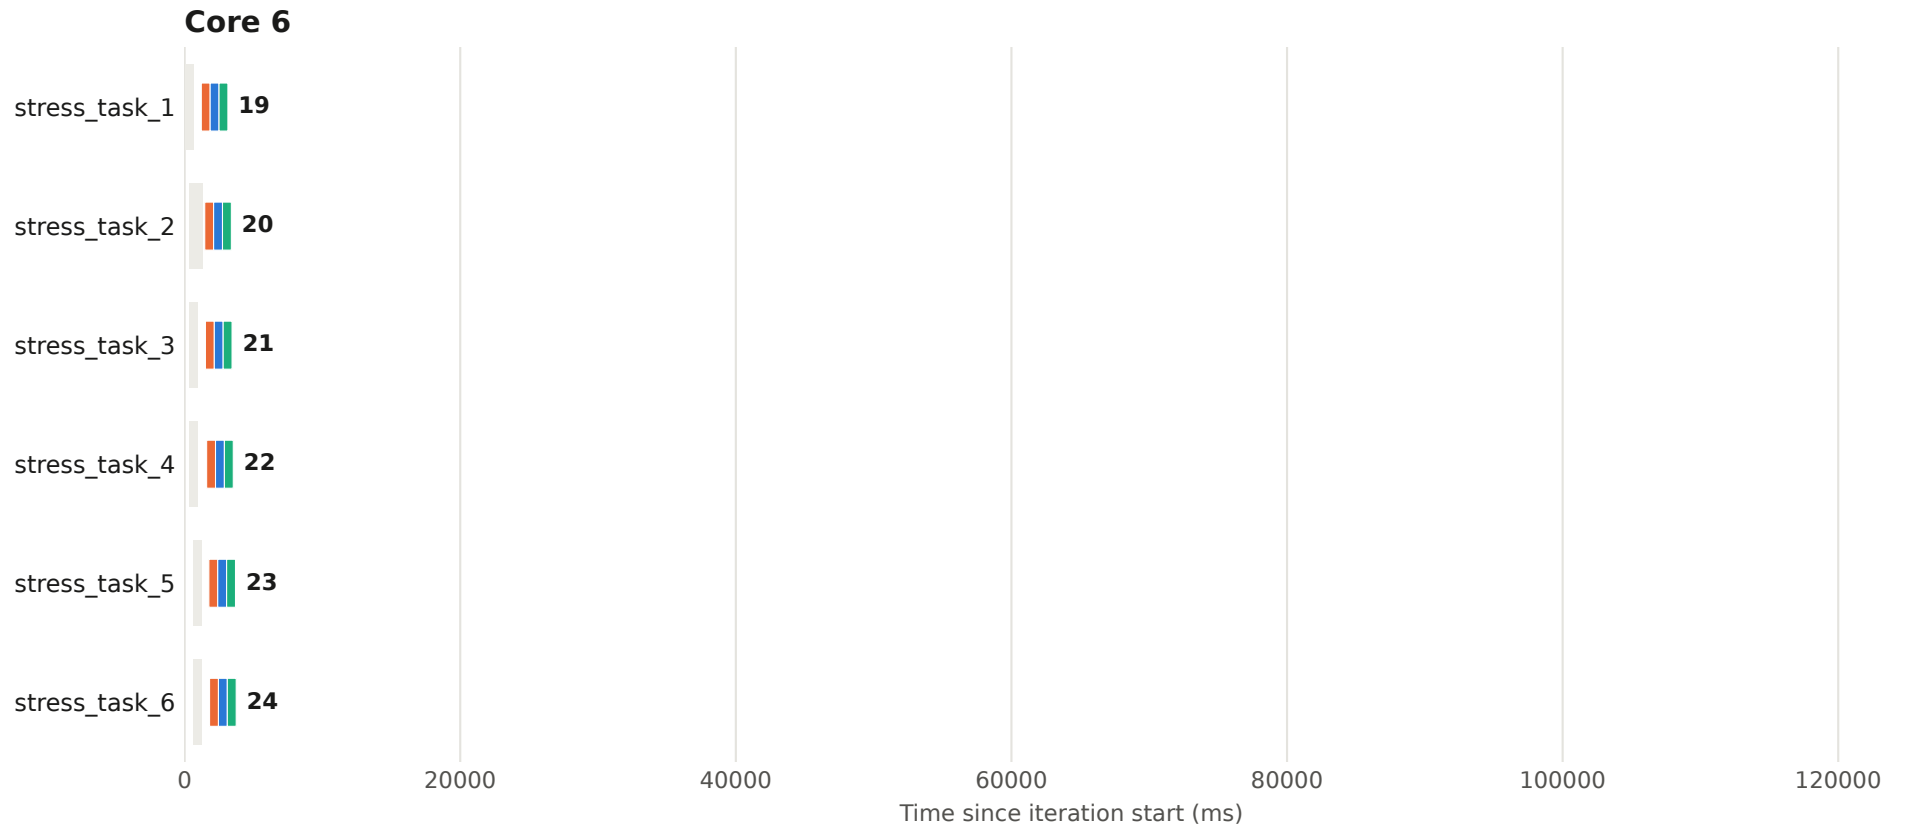


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 24 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

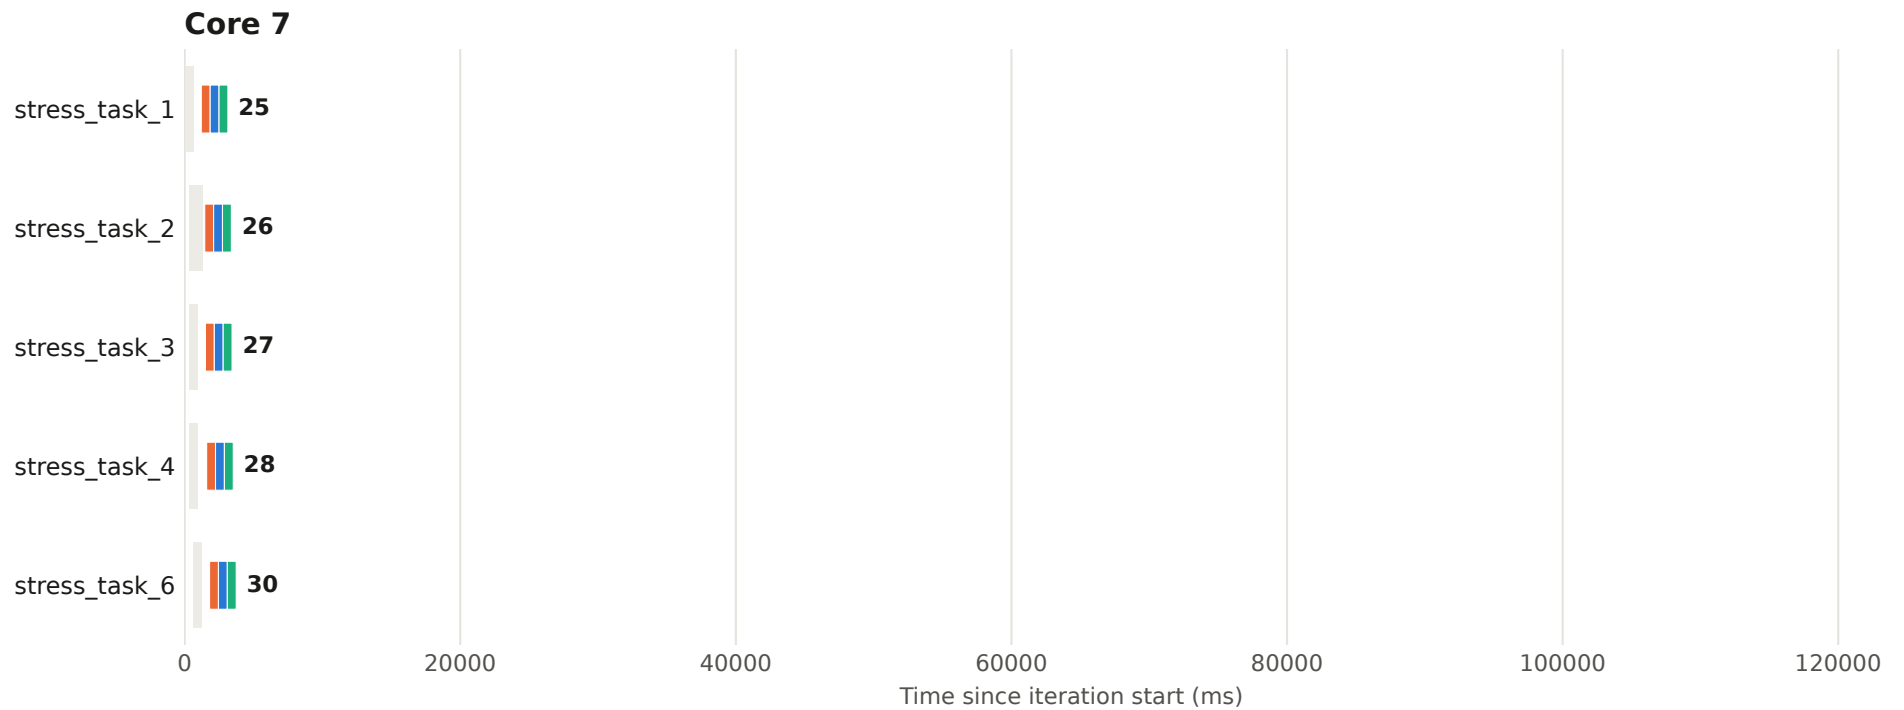


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 24 - core 72026

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

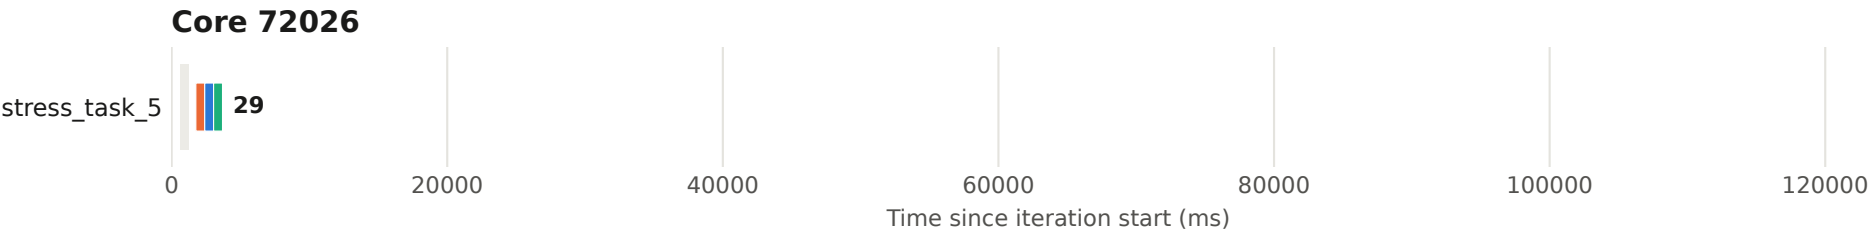

Execution plan - iteration 25 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

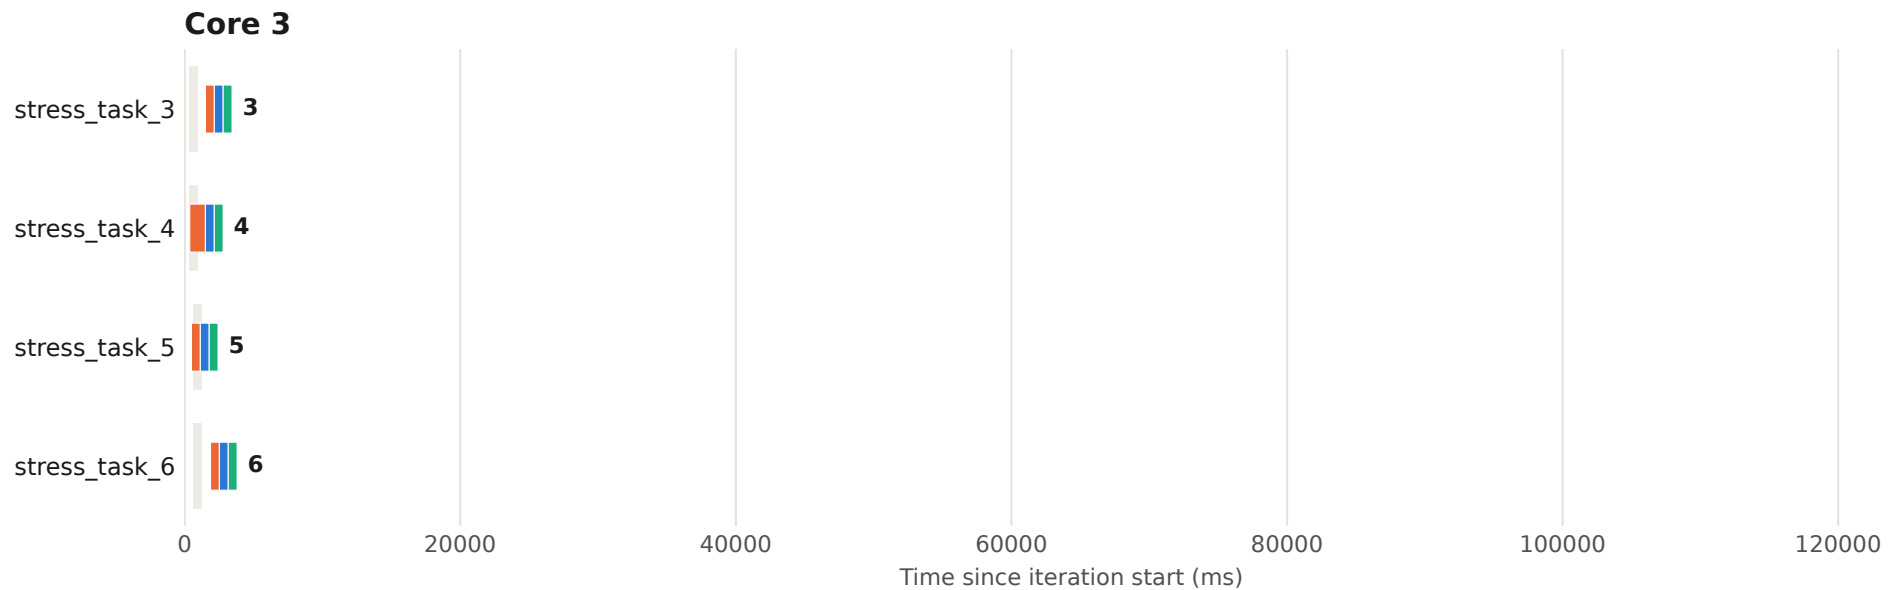


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 25 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

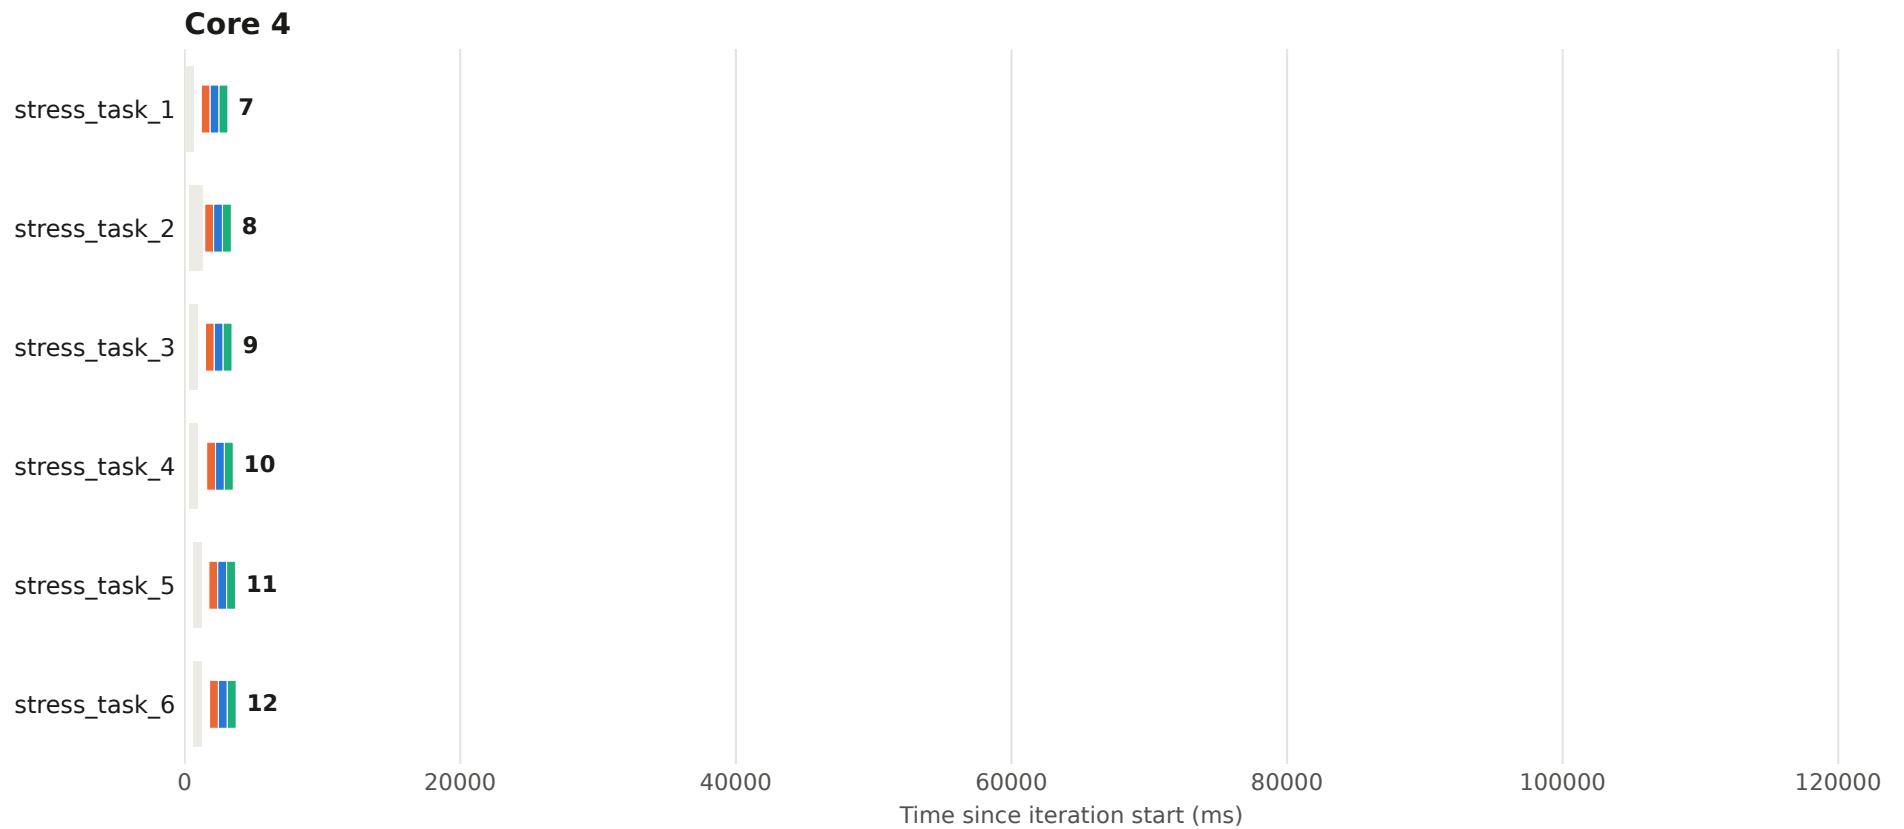


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 25 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

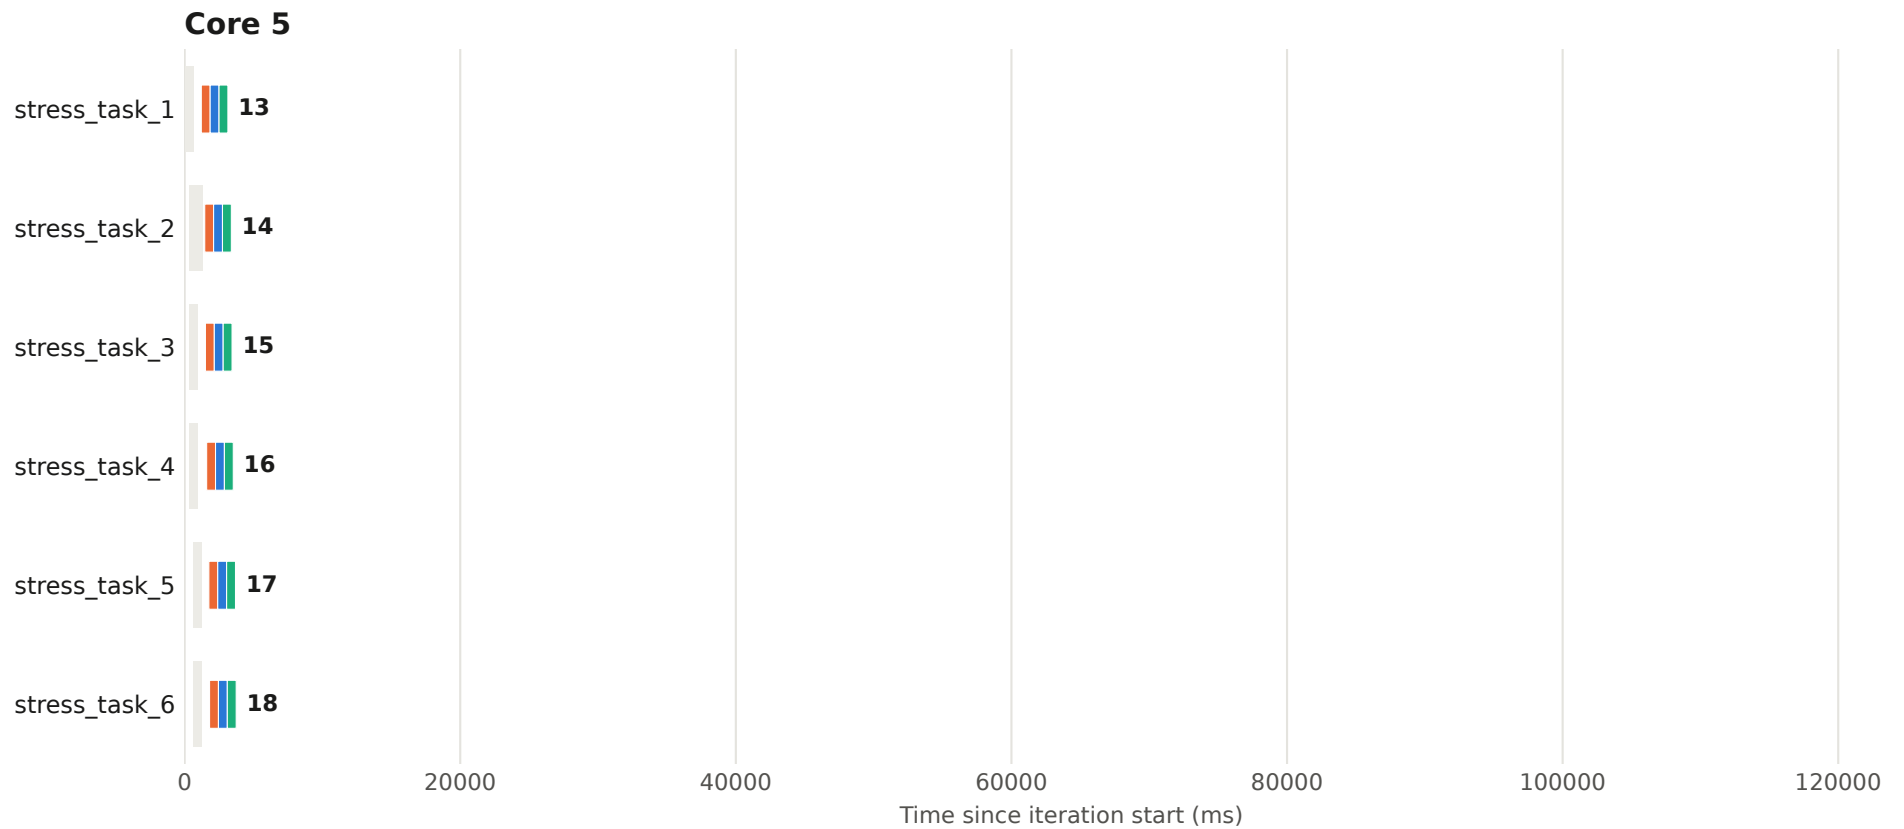


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 25 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

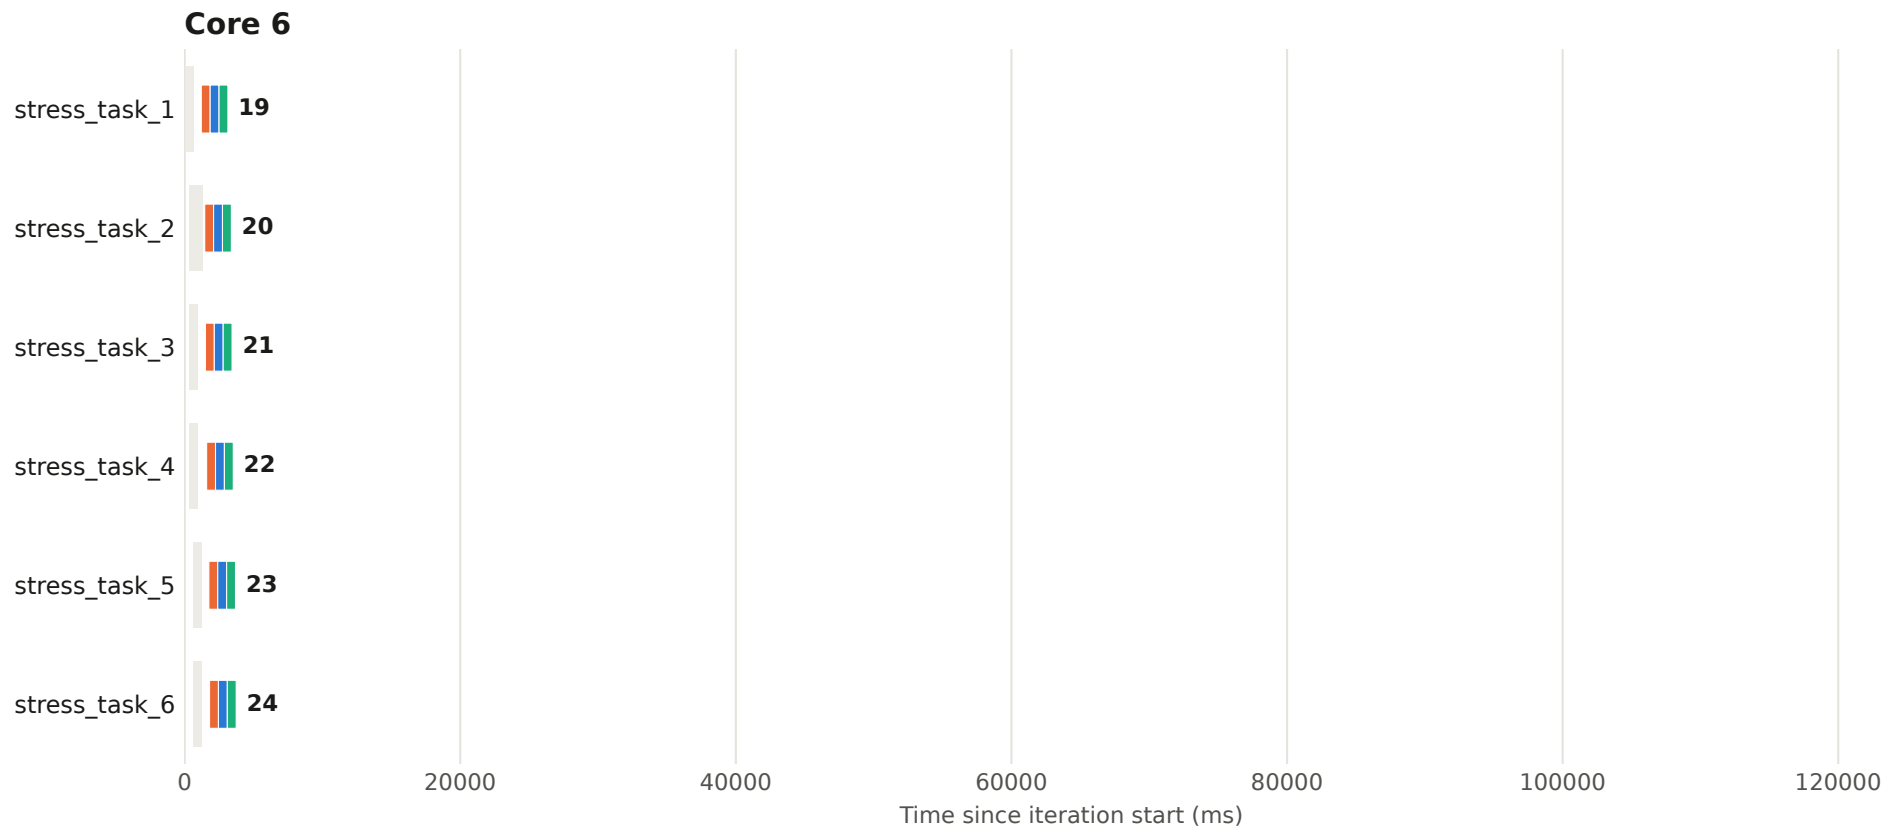


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 25 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

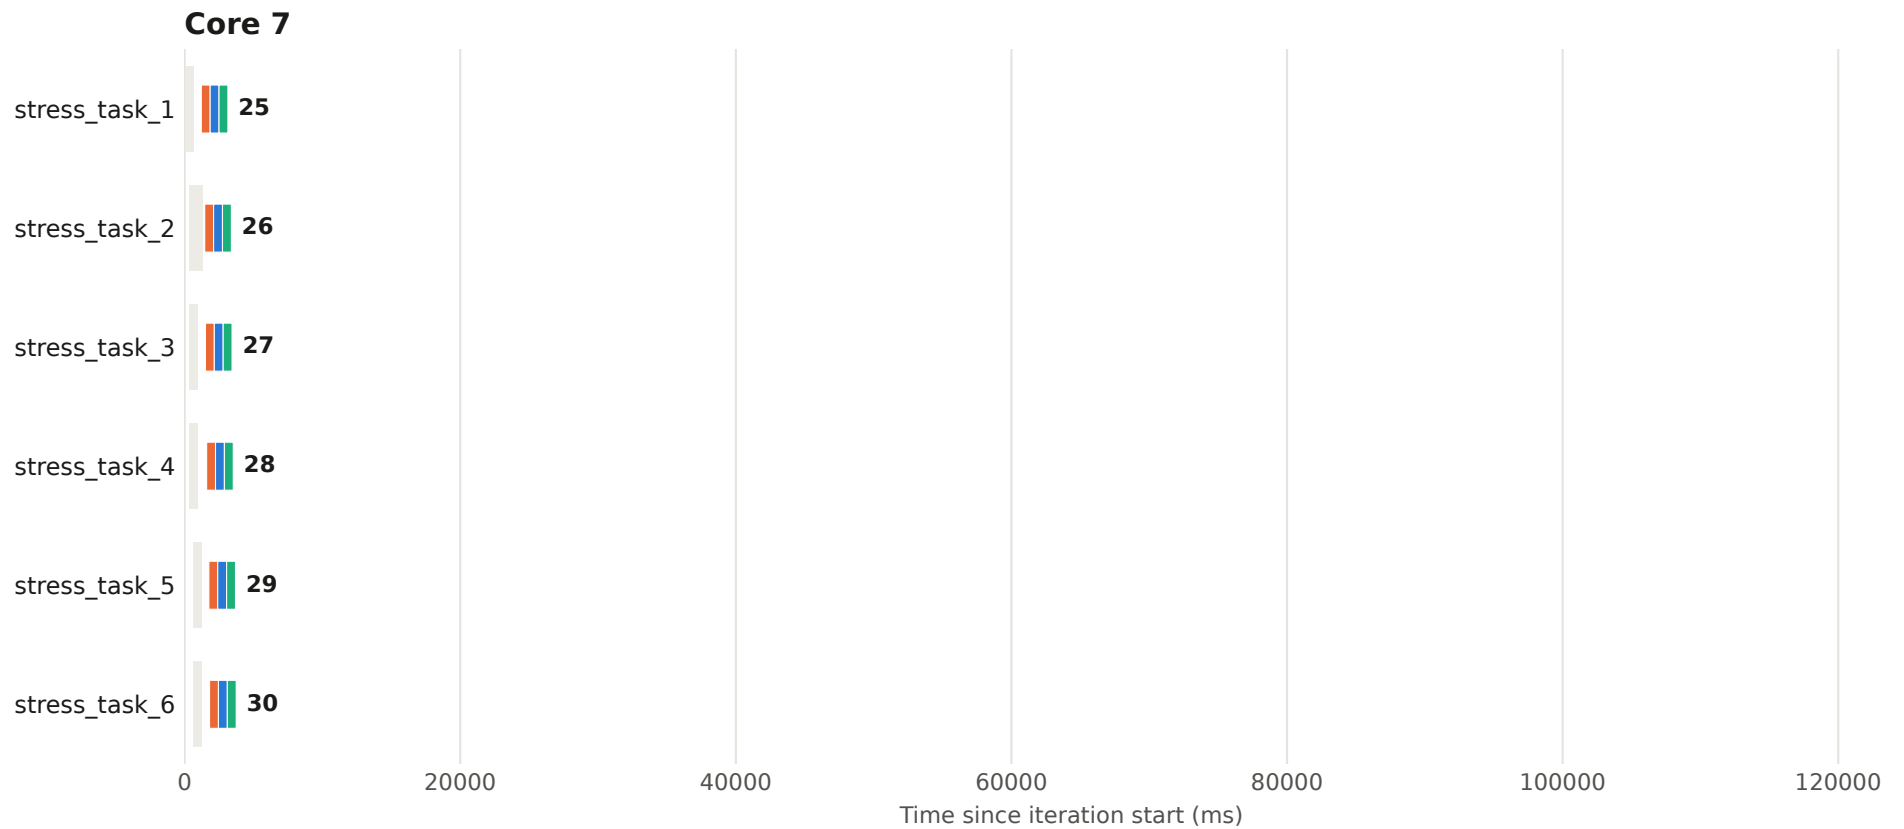


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 26 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

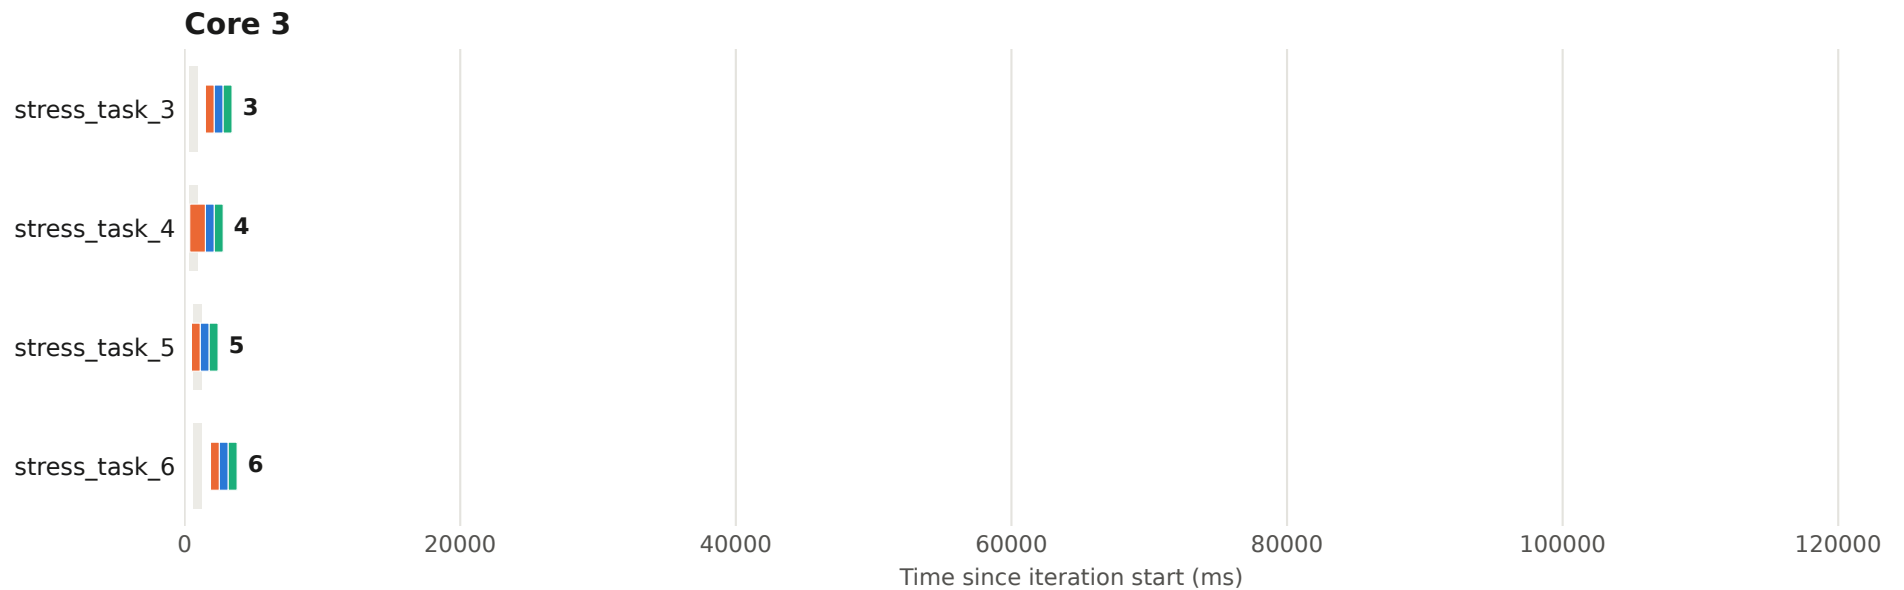


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 26 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

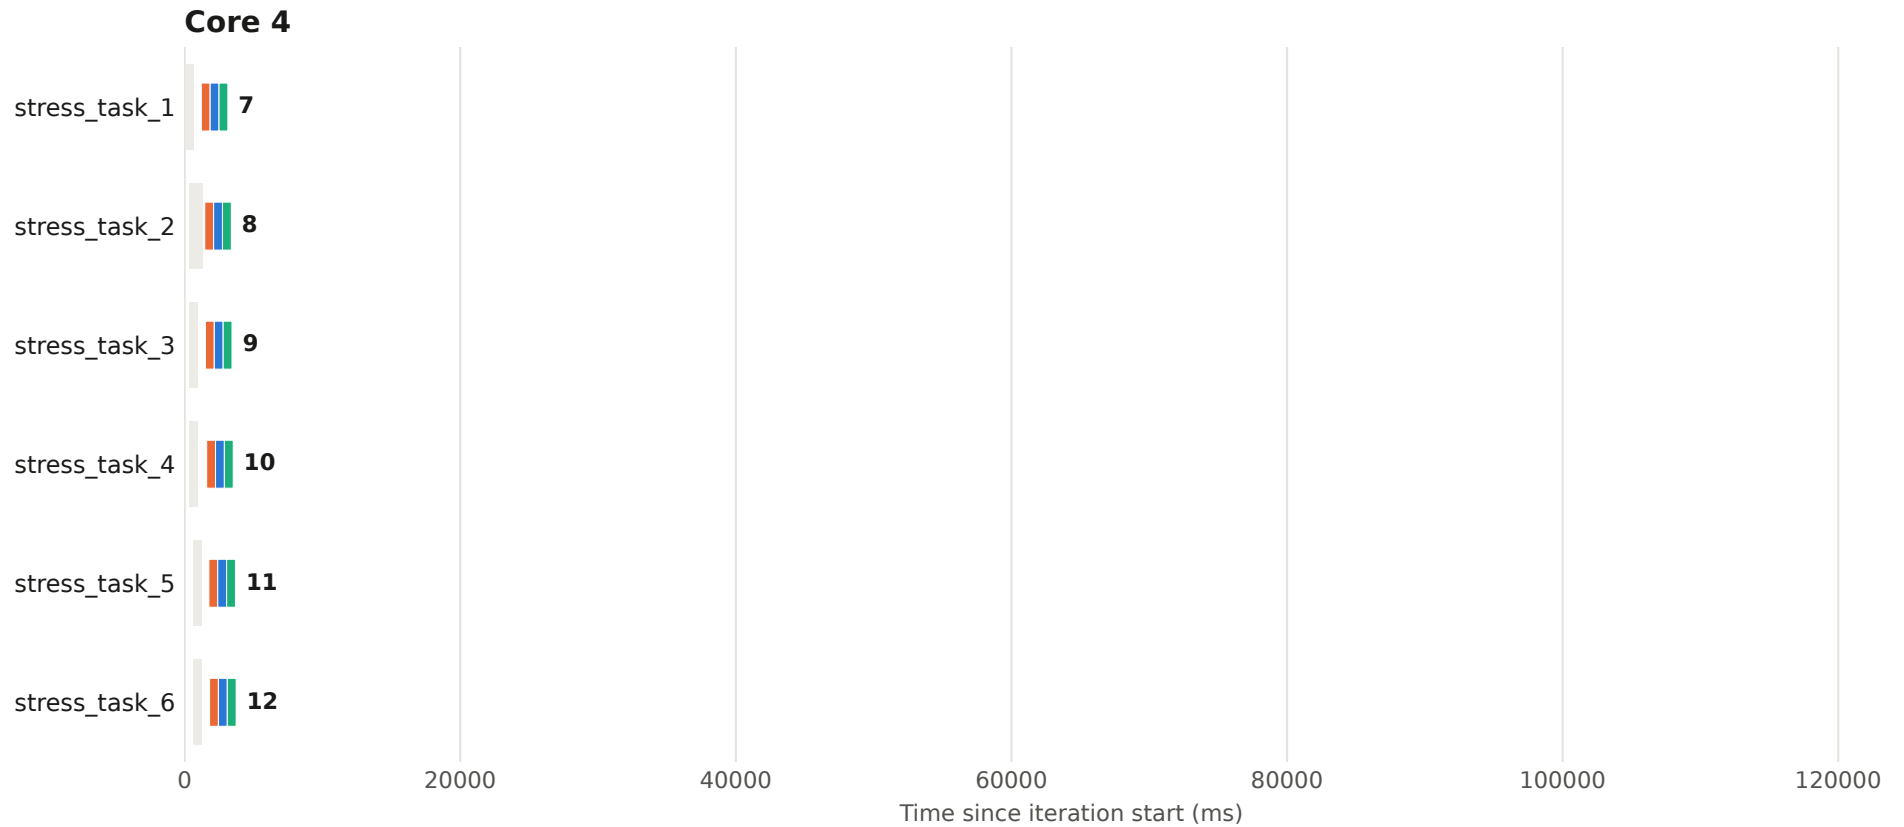


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 26 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

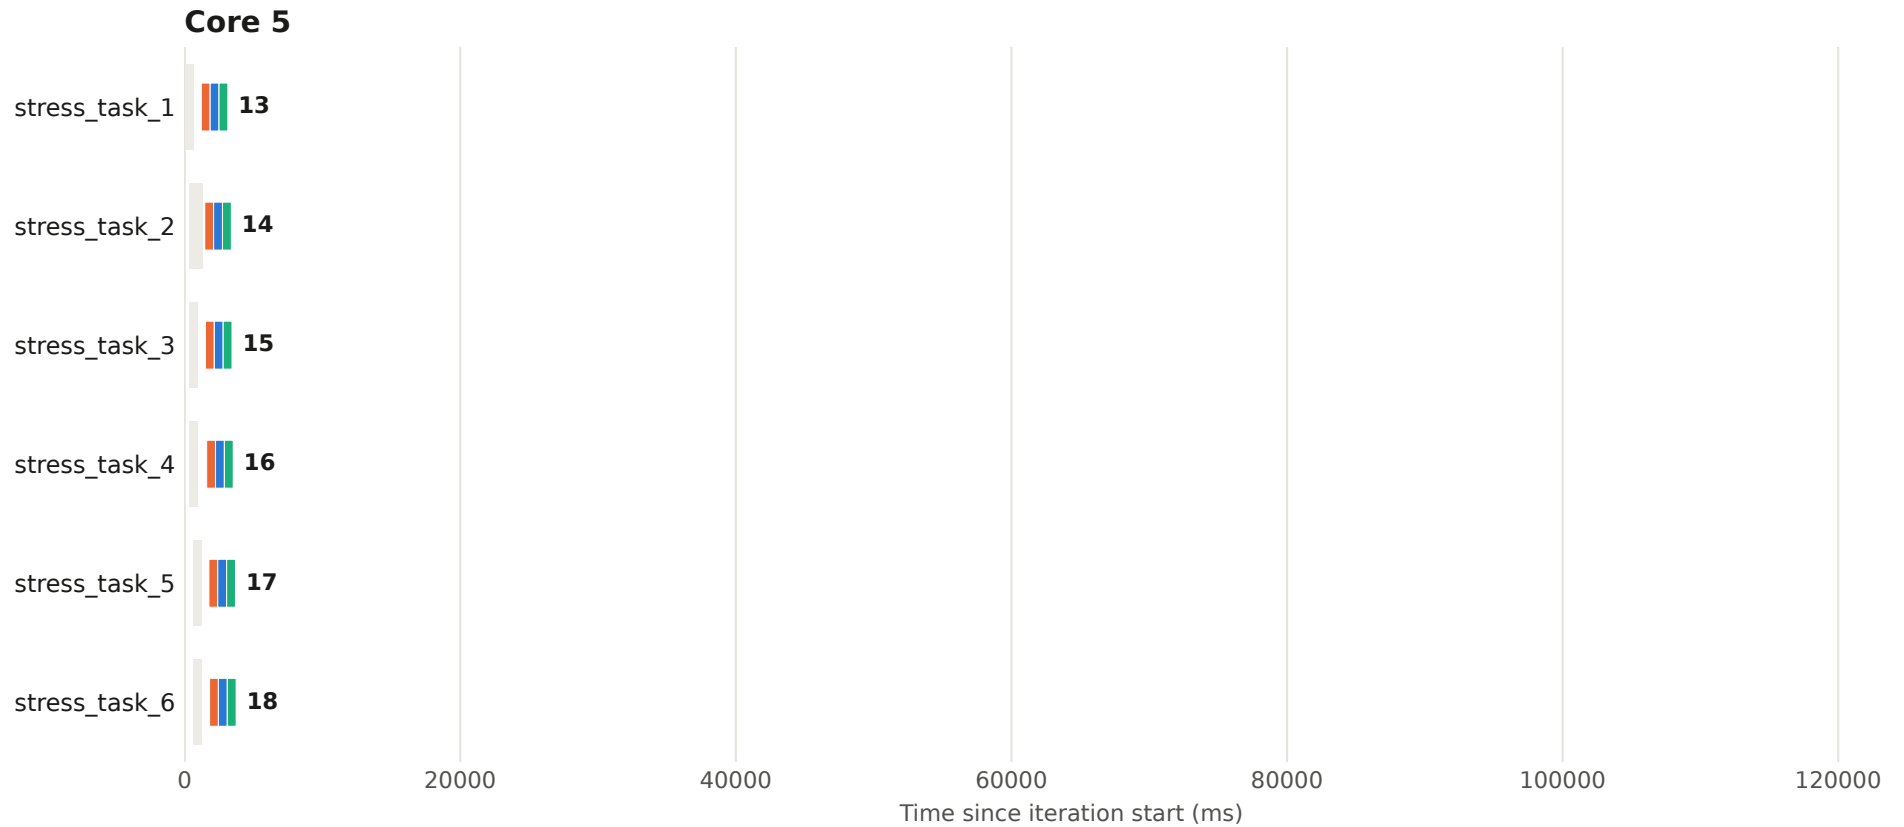


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 26 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

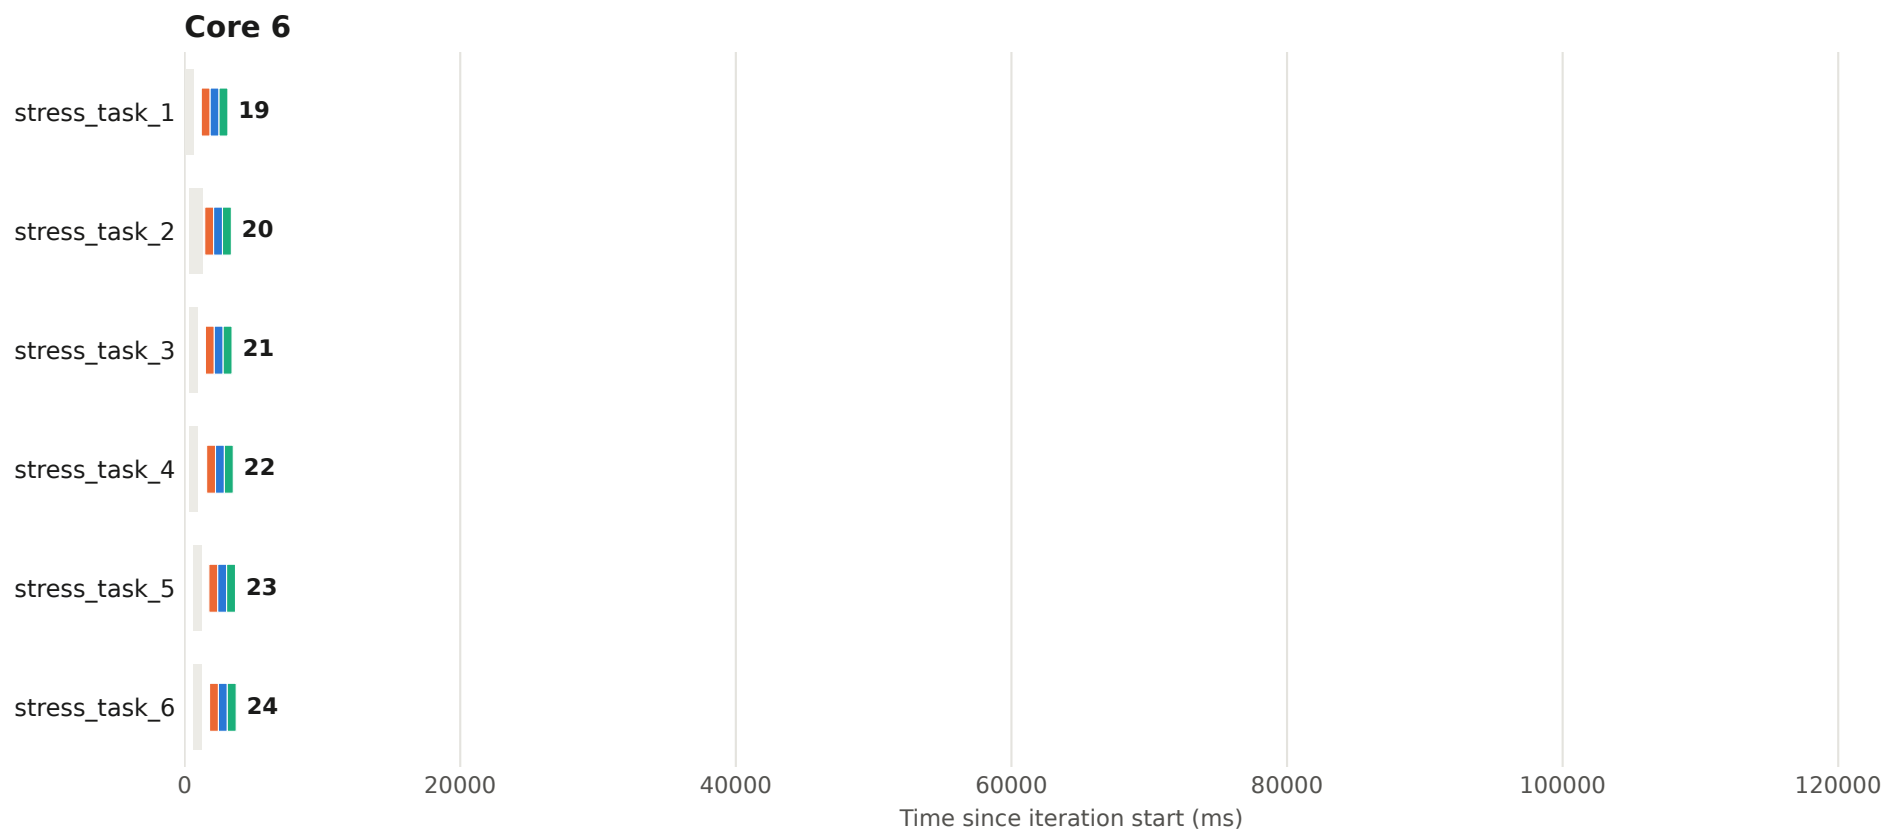


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 26 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

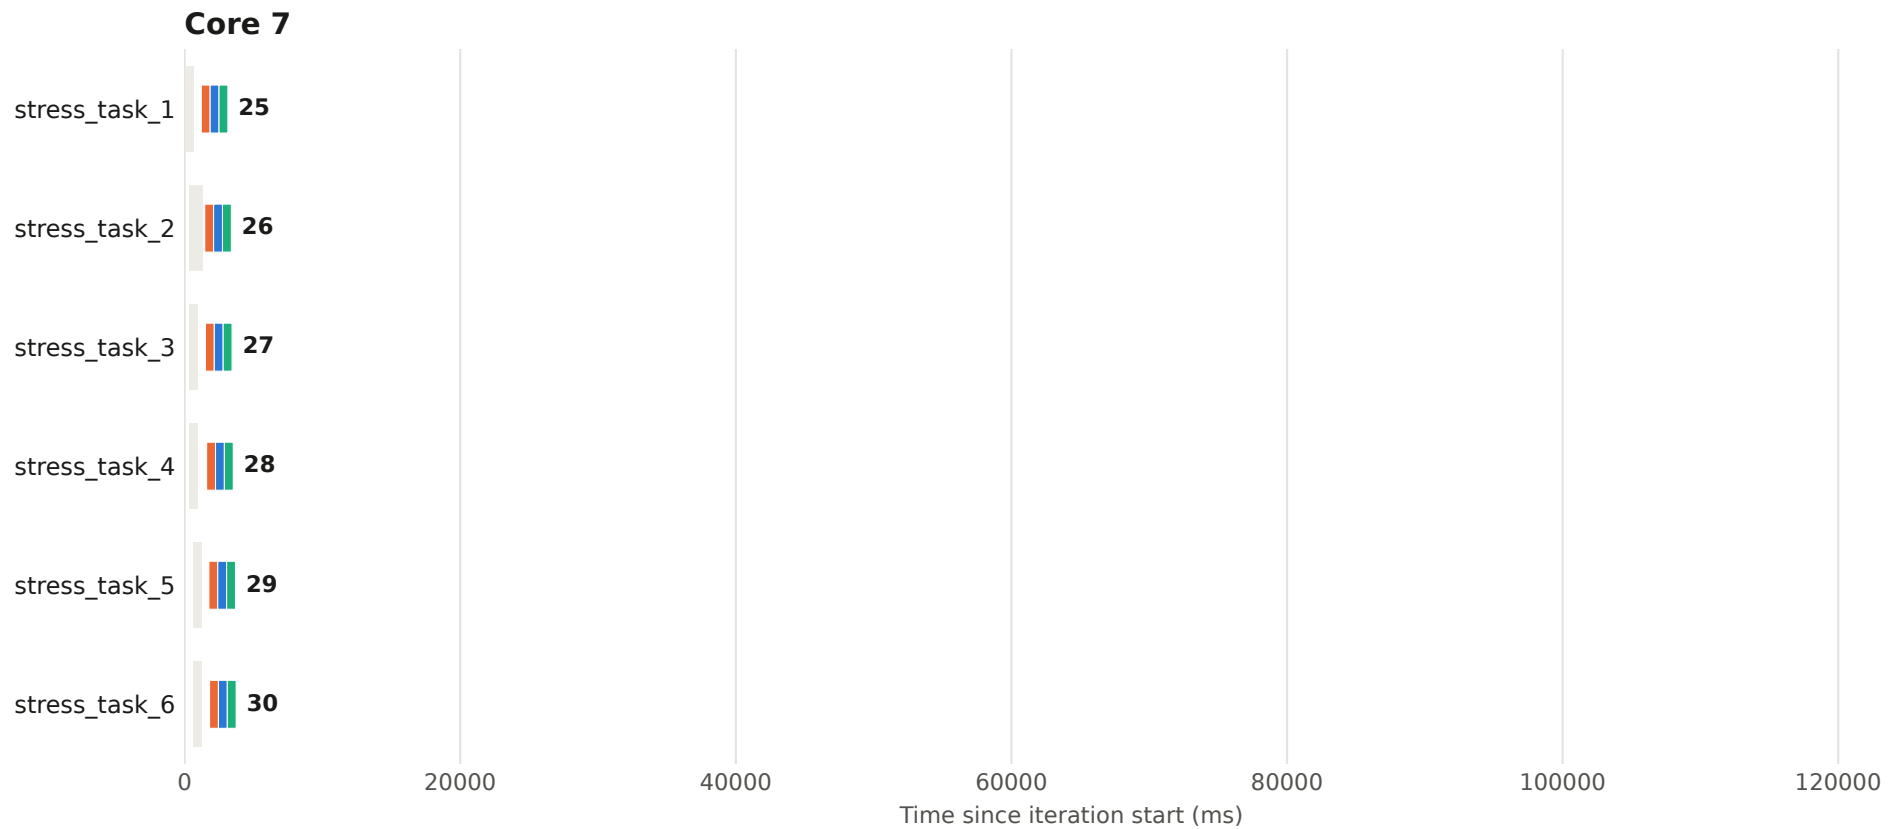


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 27 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

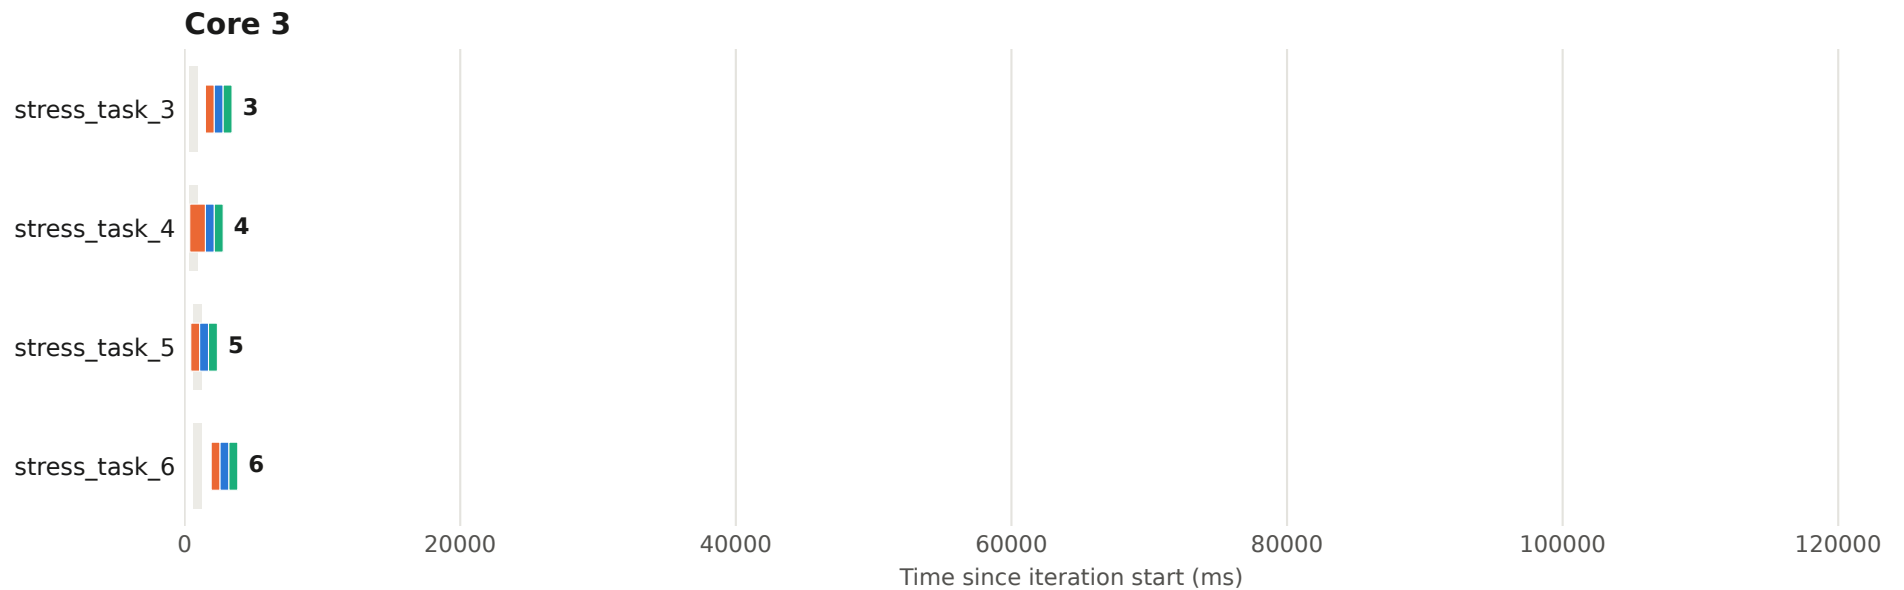

Execution plan - iteration 27 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

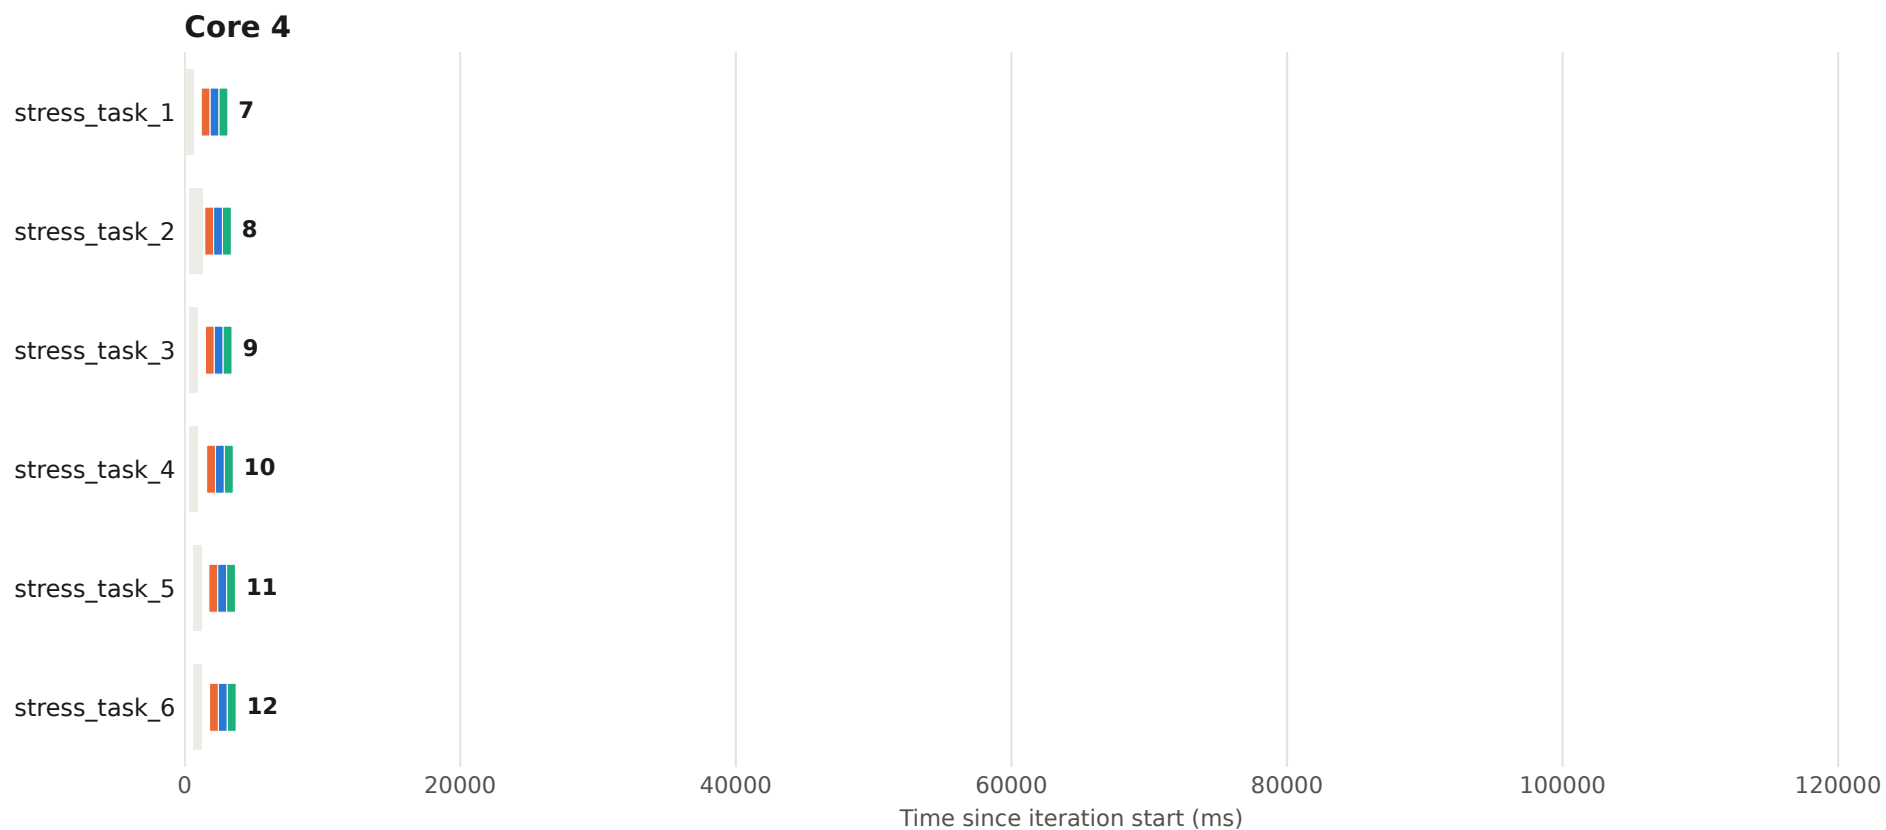


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 27 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

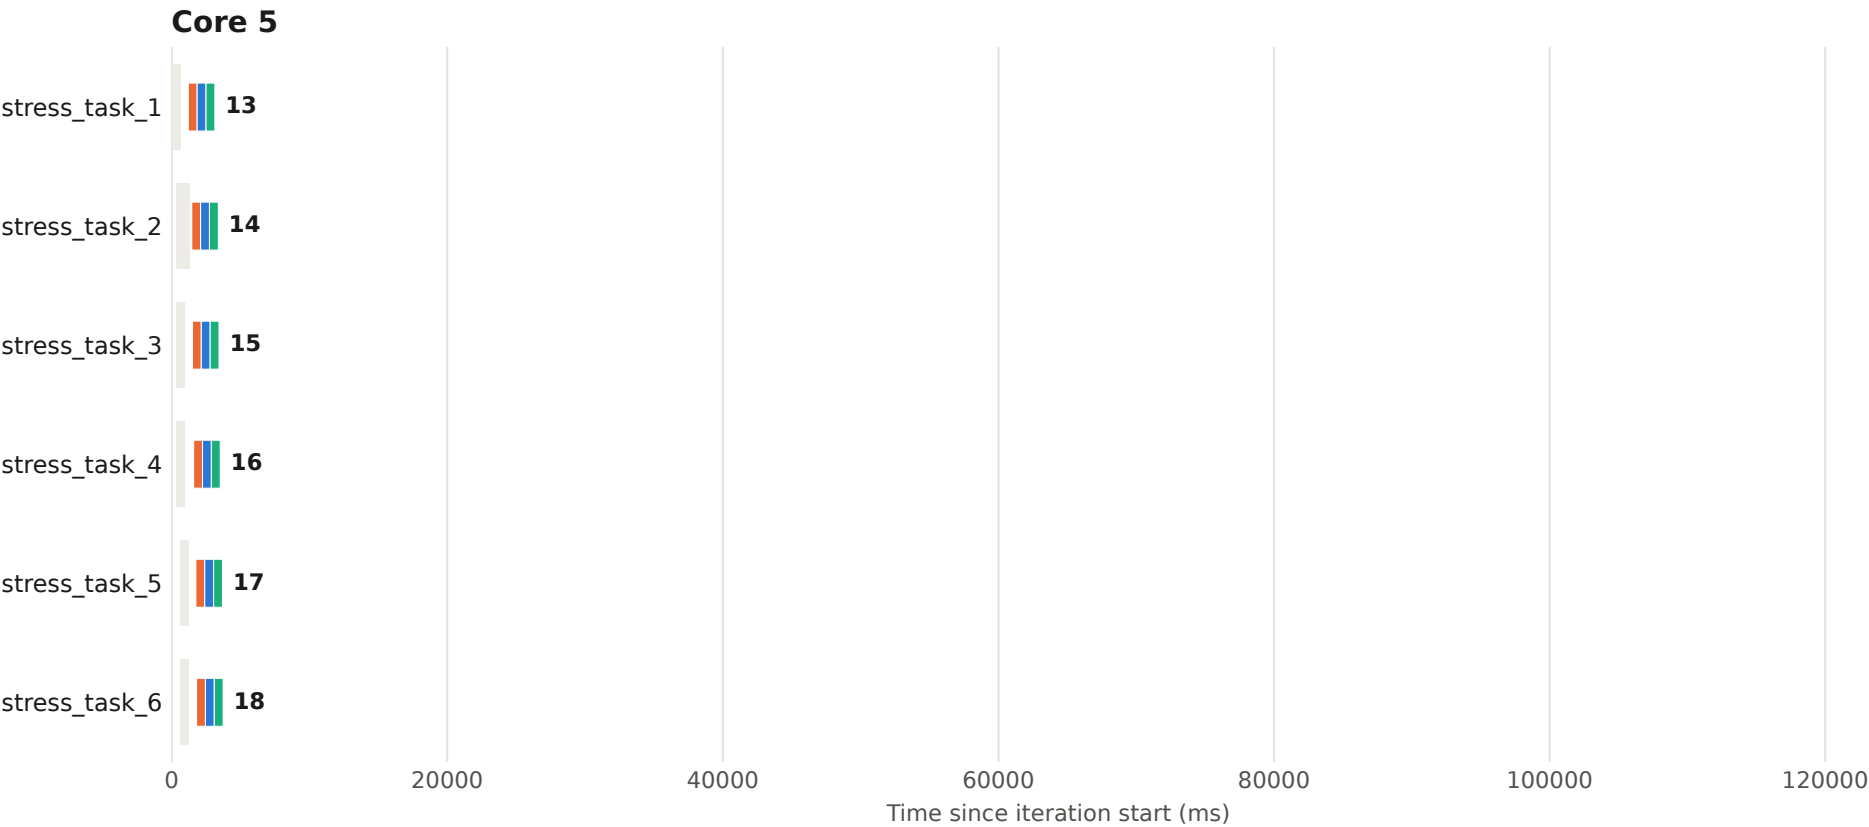


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 27 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

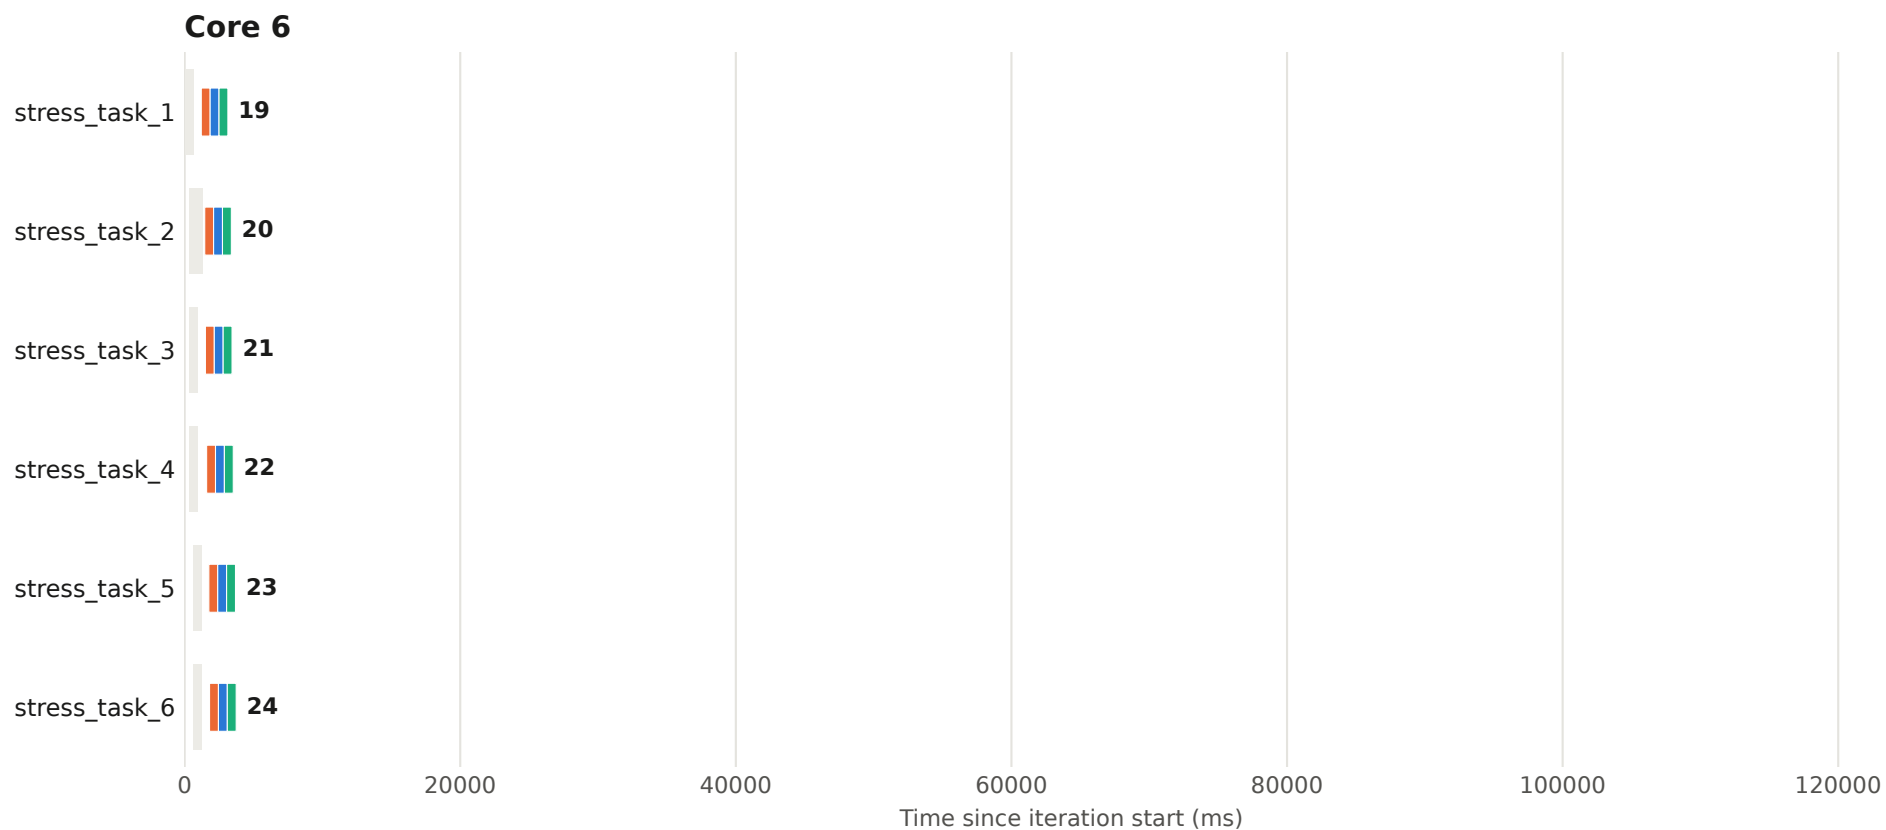


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 27 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

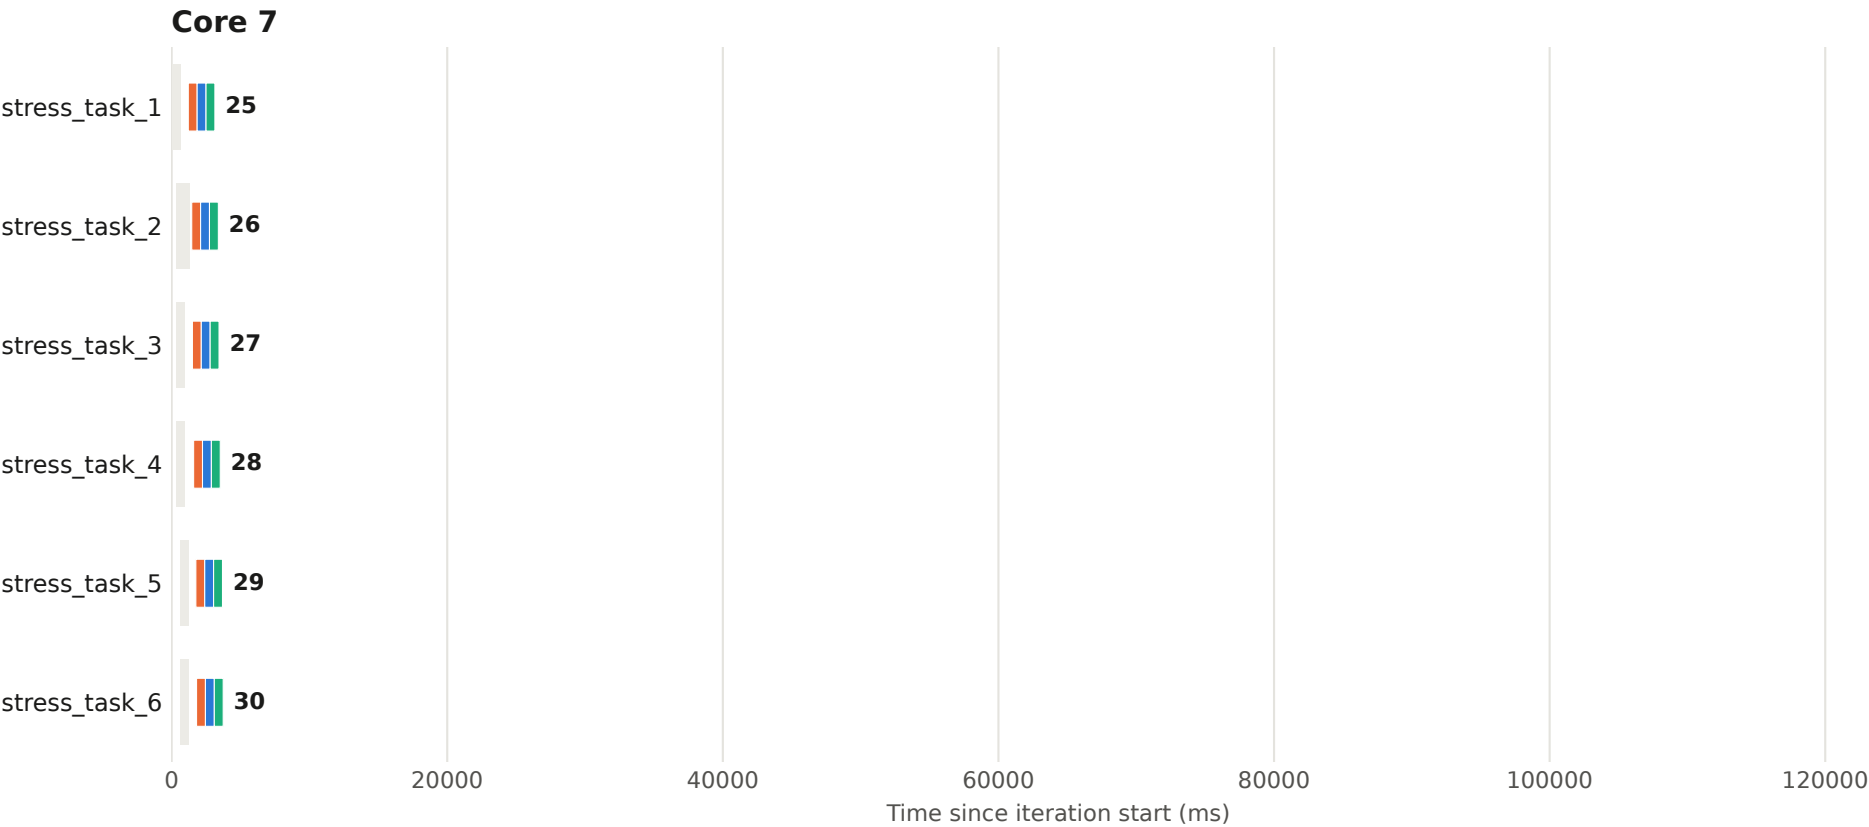


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 28 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

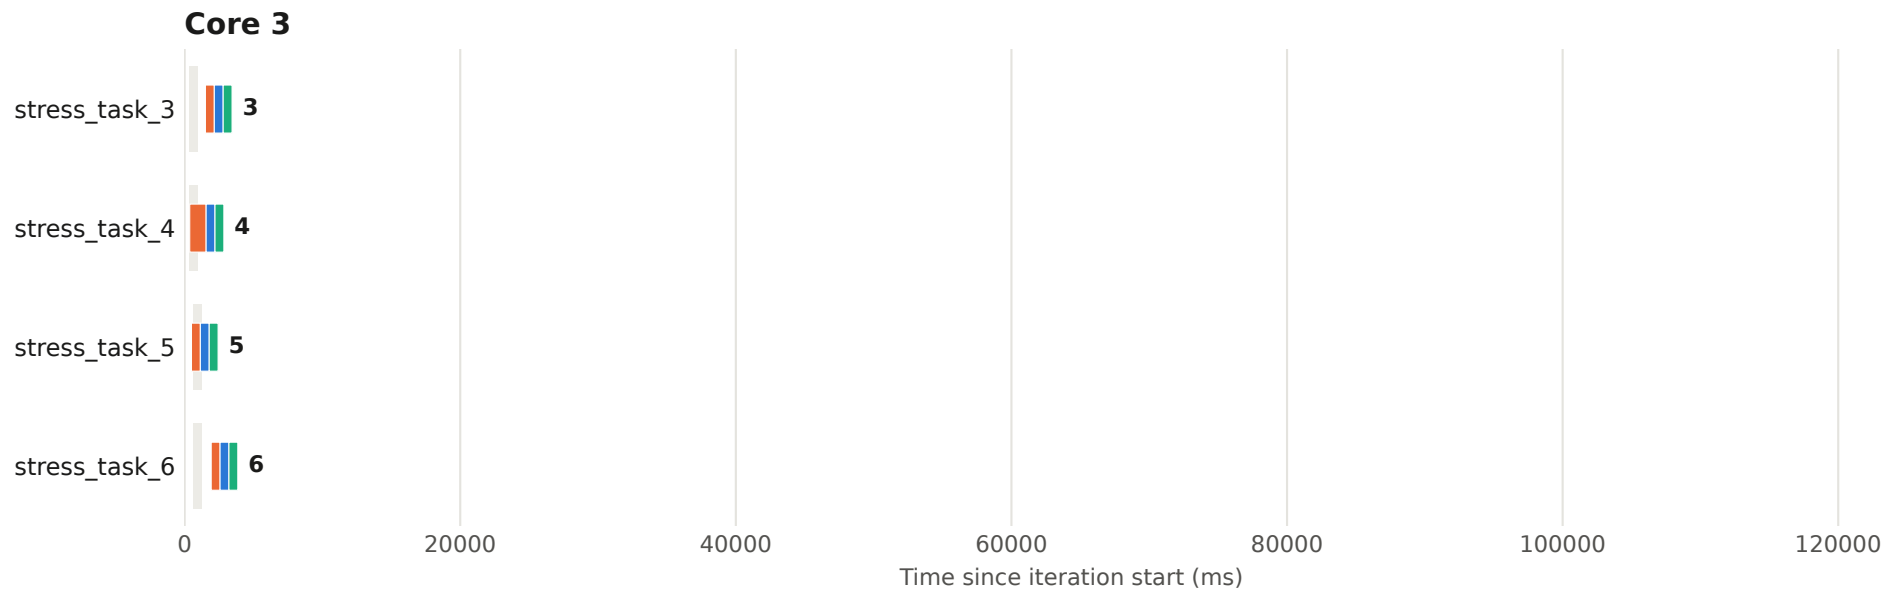

Execution plan - iteration 28 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

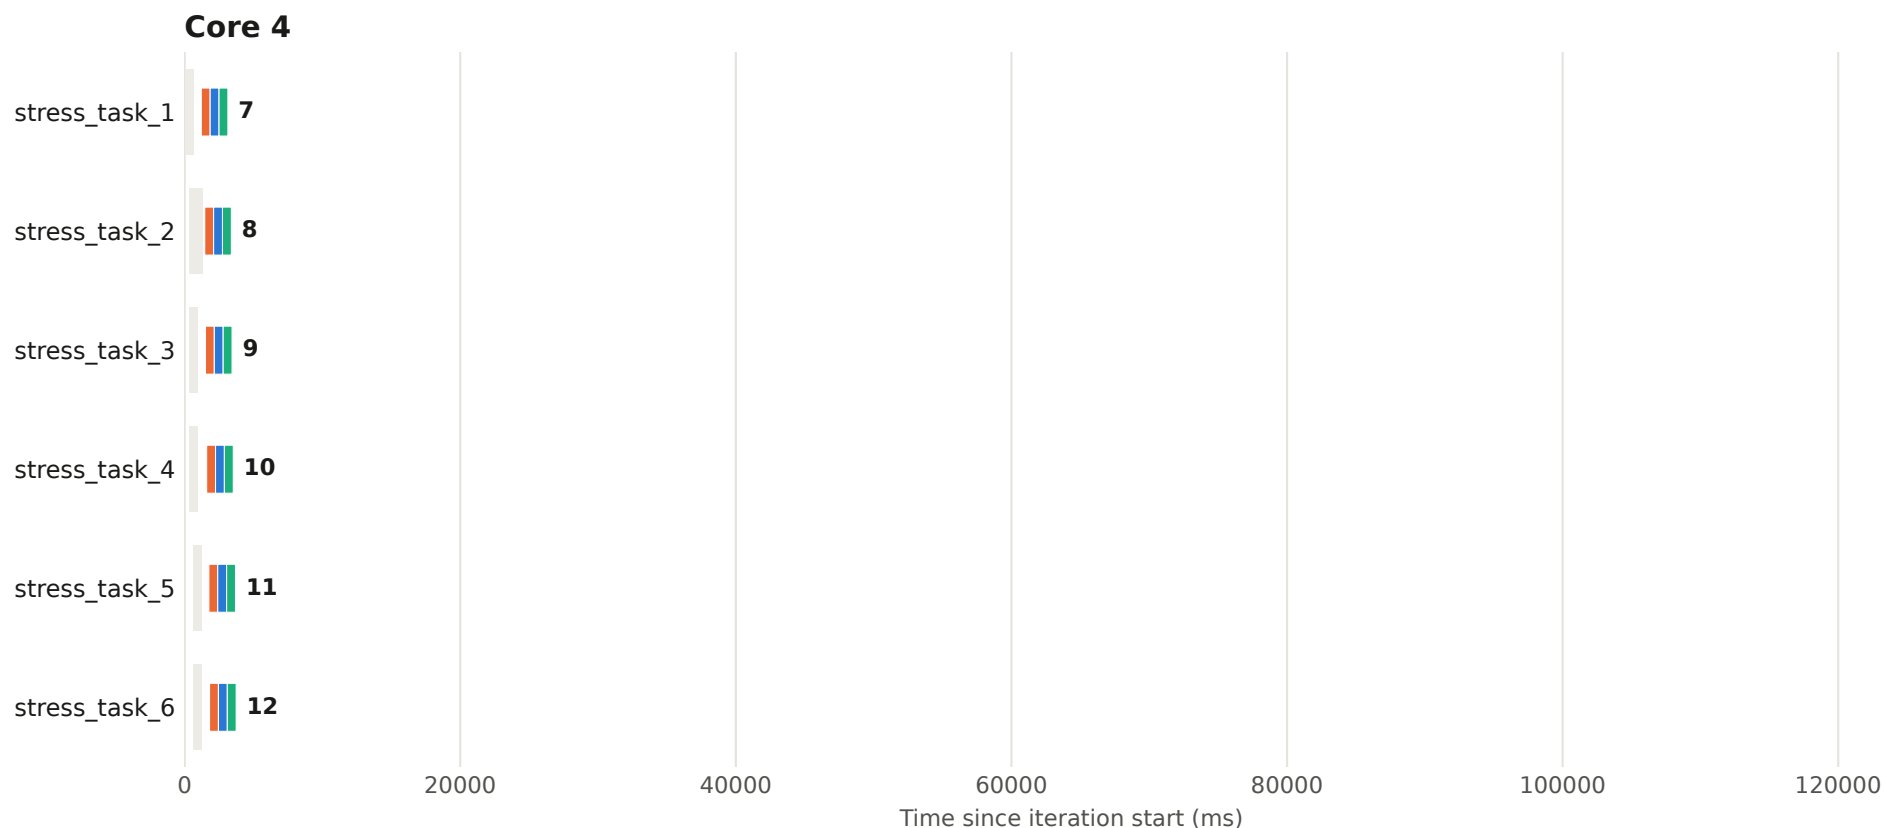


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 28 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

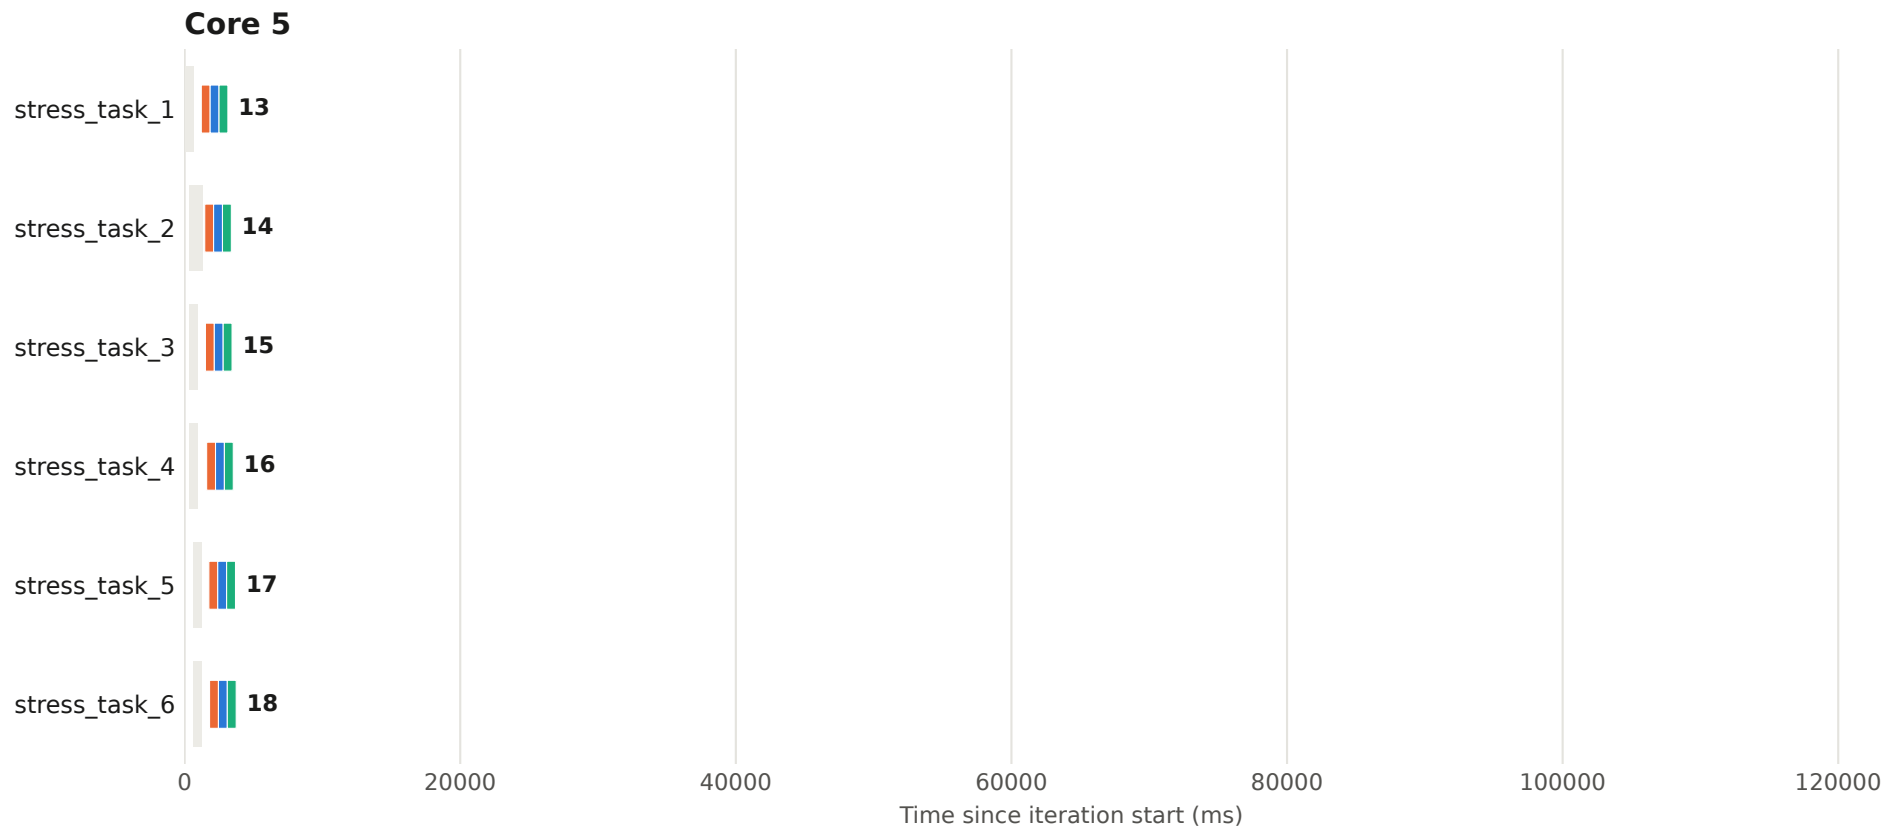


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 28 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

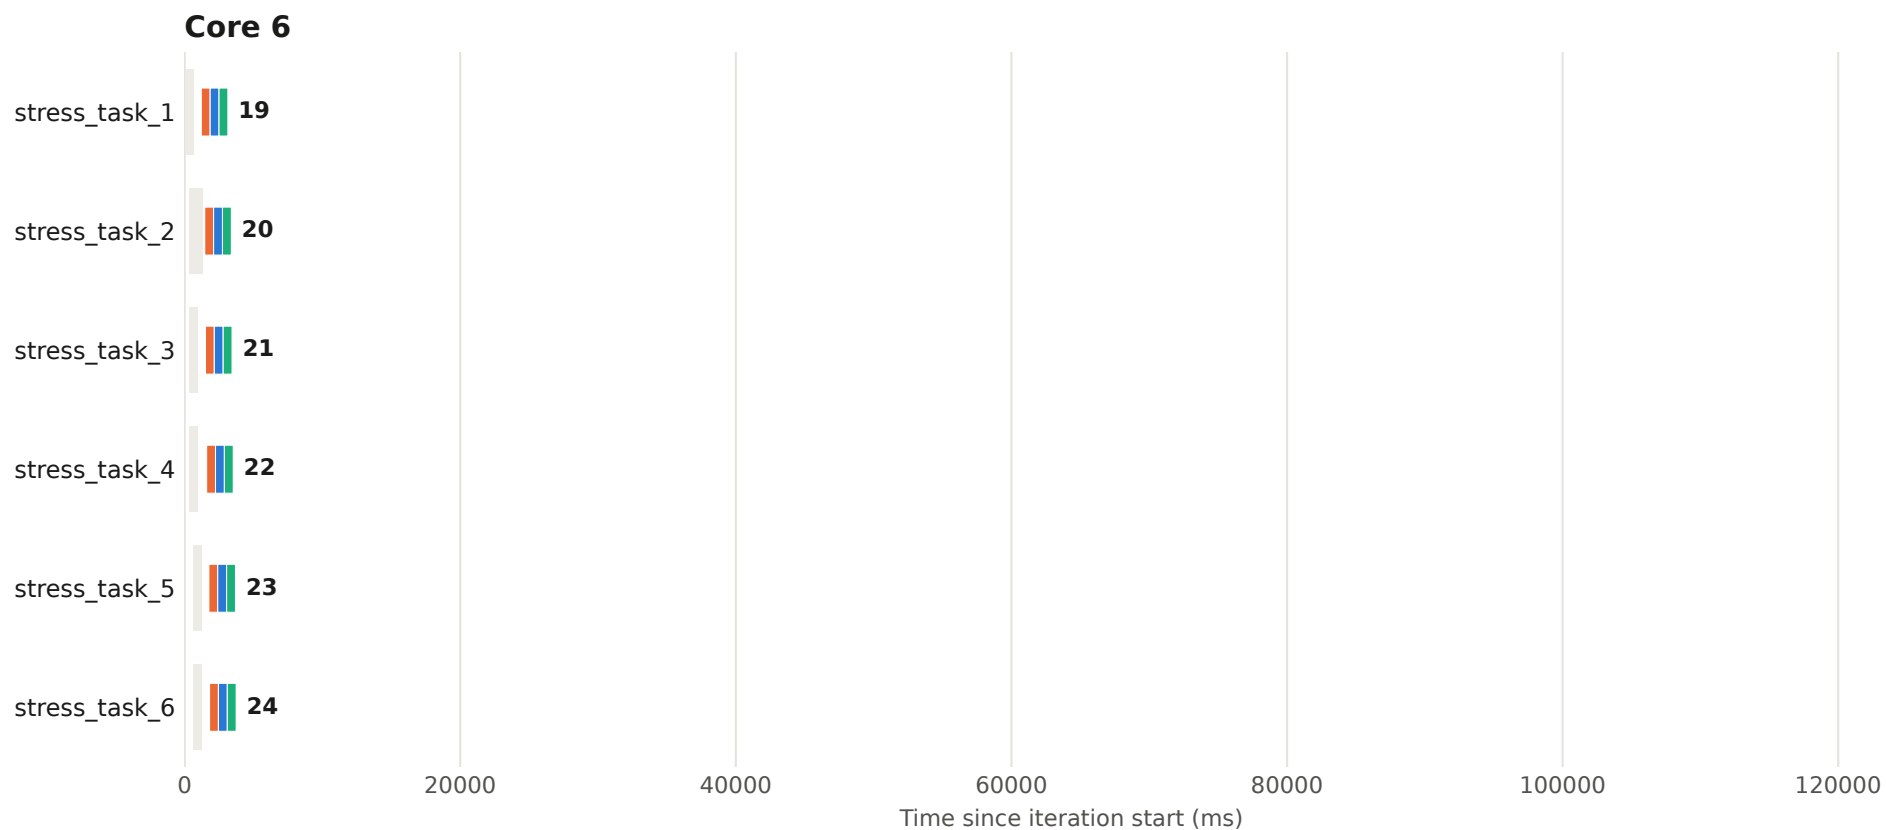


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 28 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

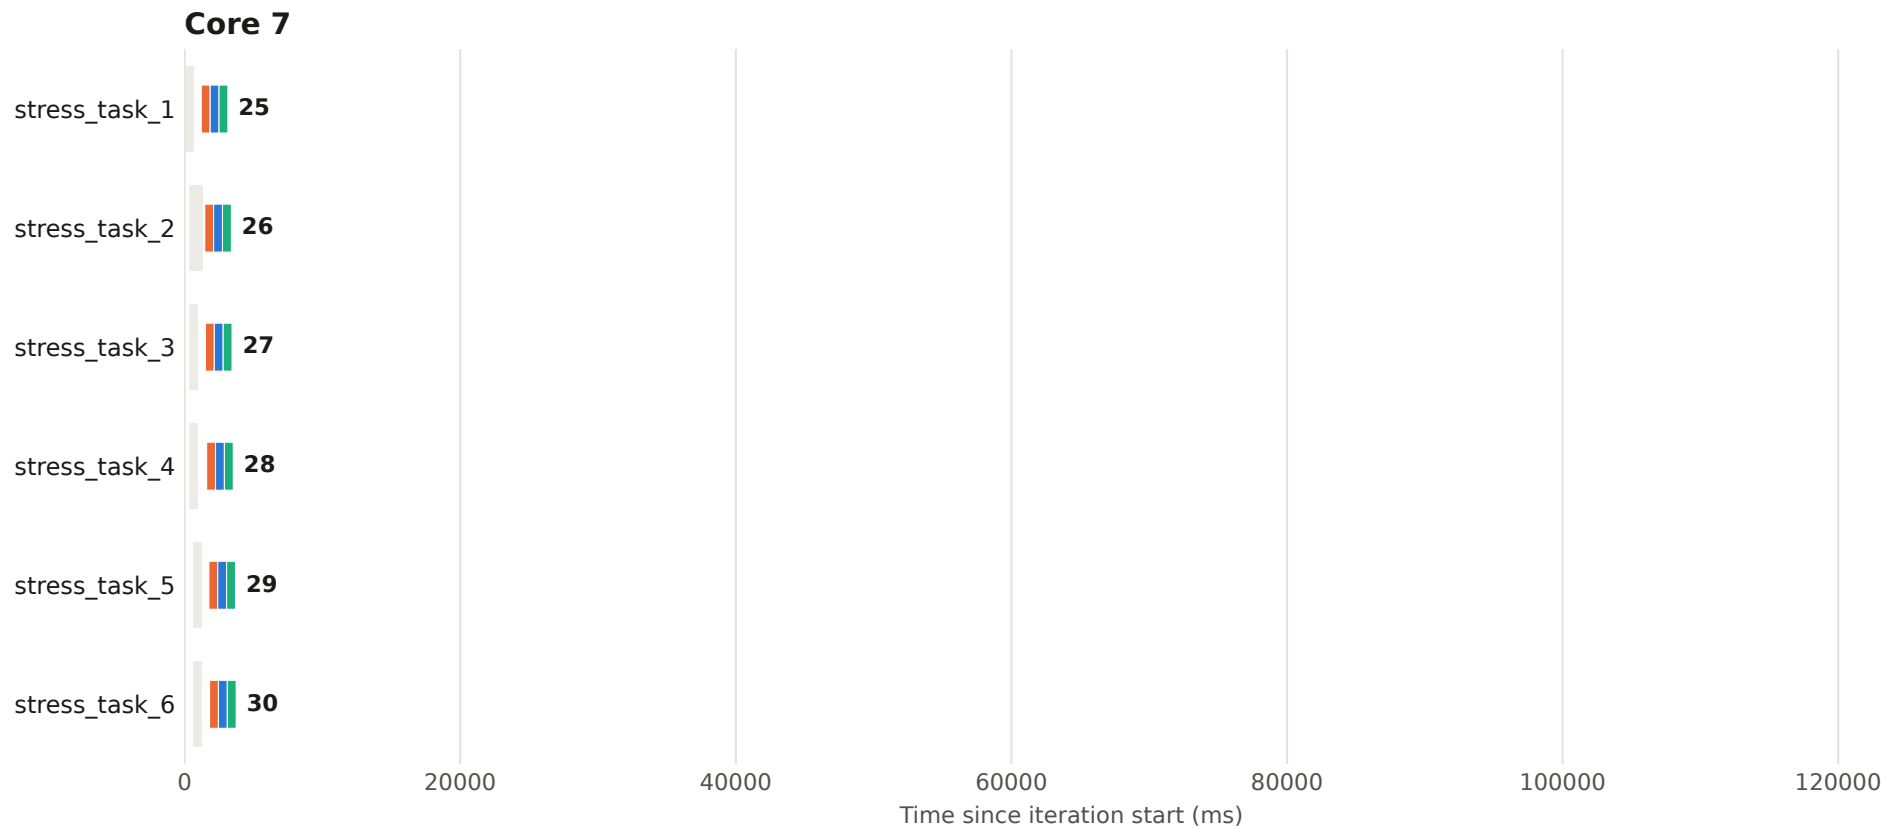


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 29 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

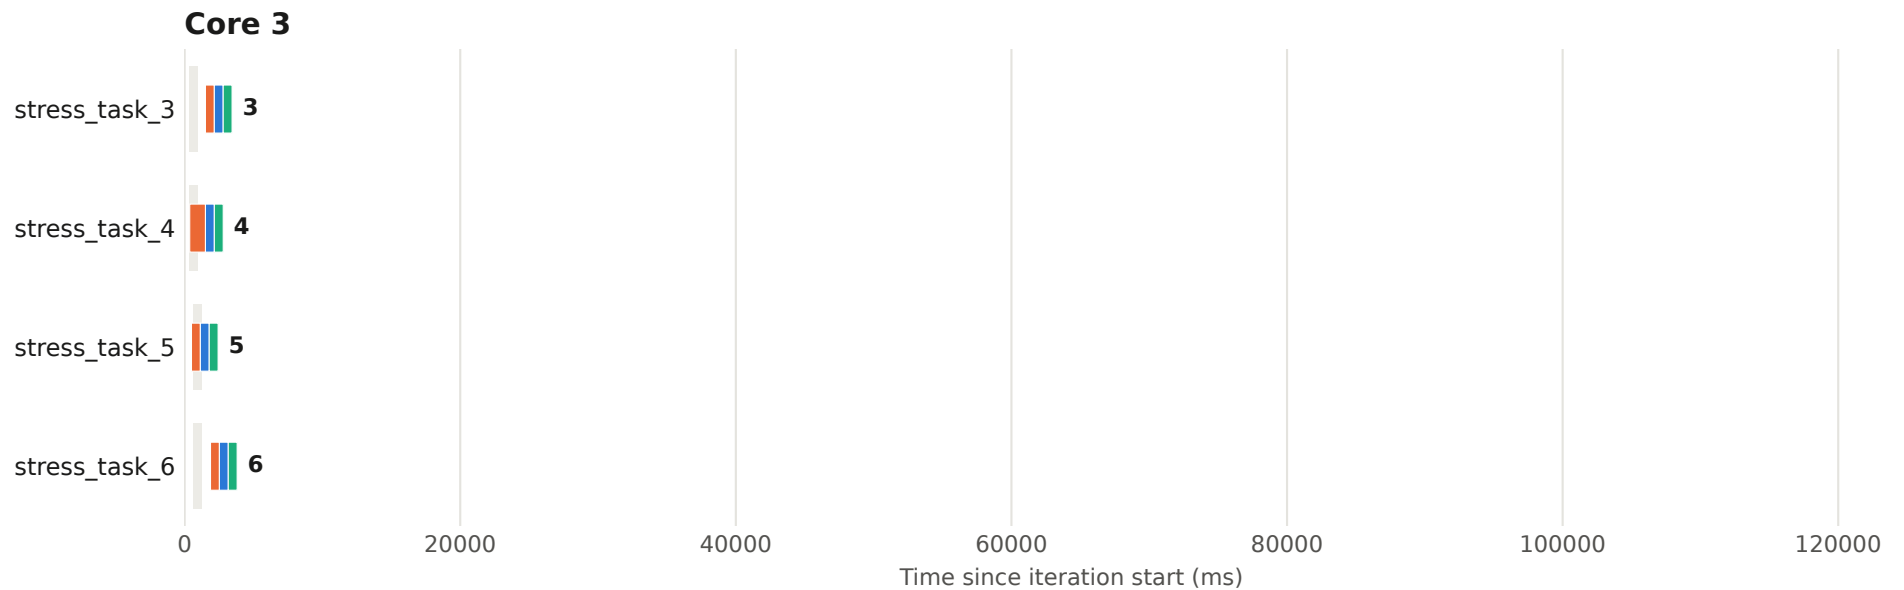


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 29 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

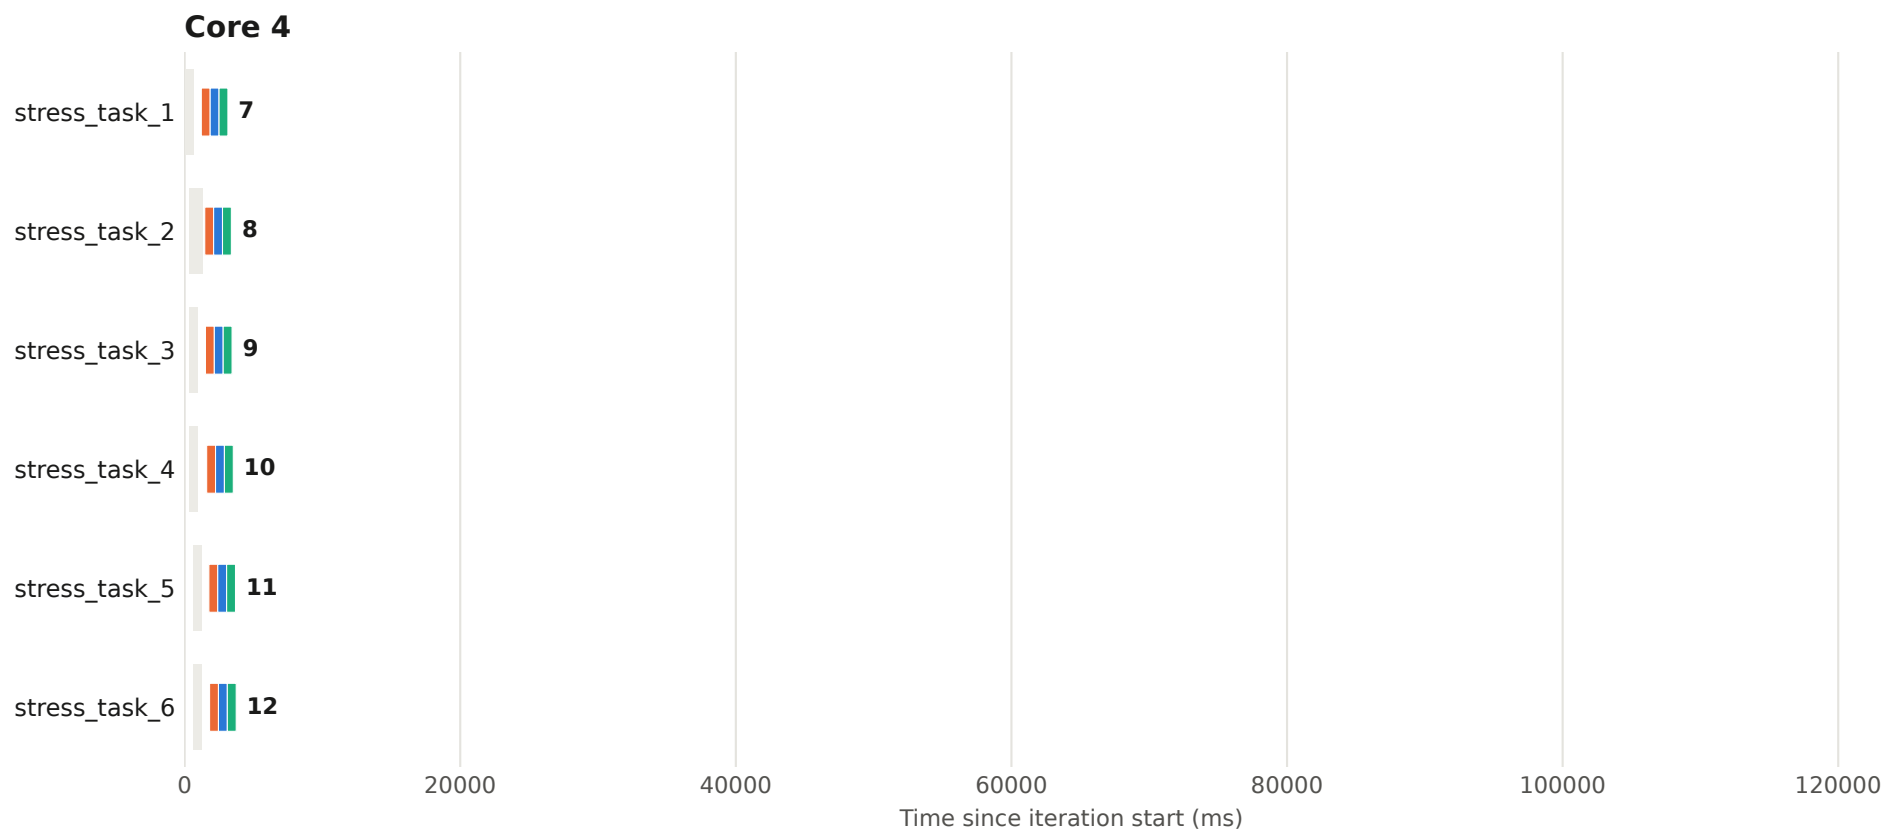


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 29 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

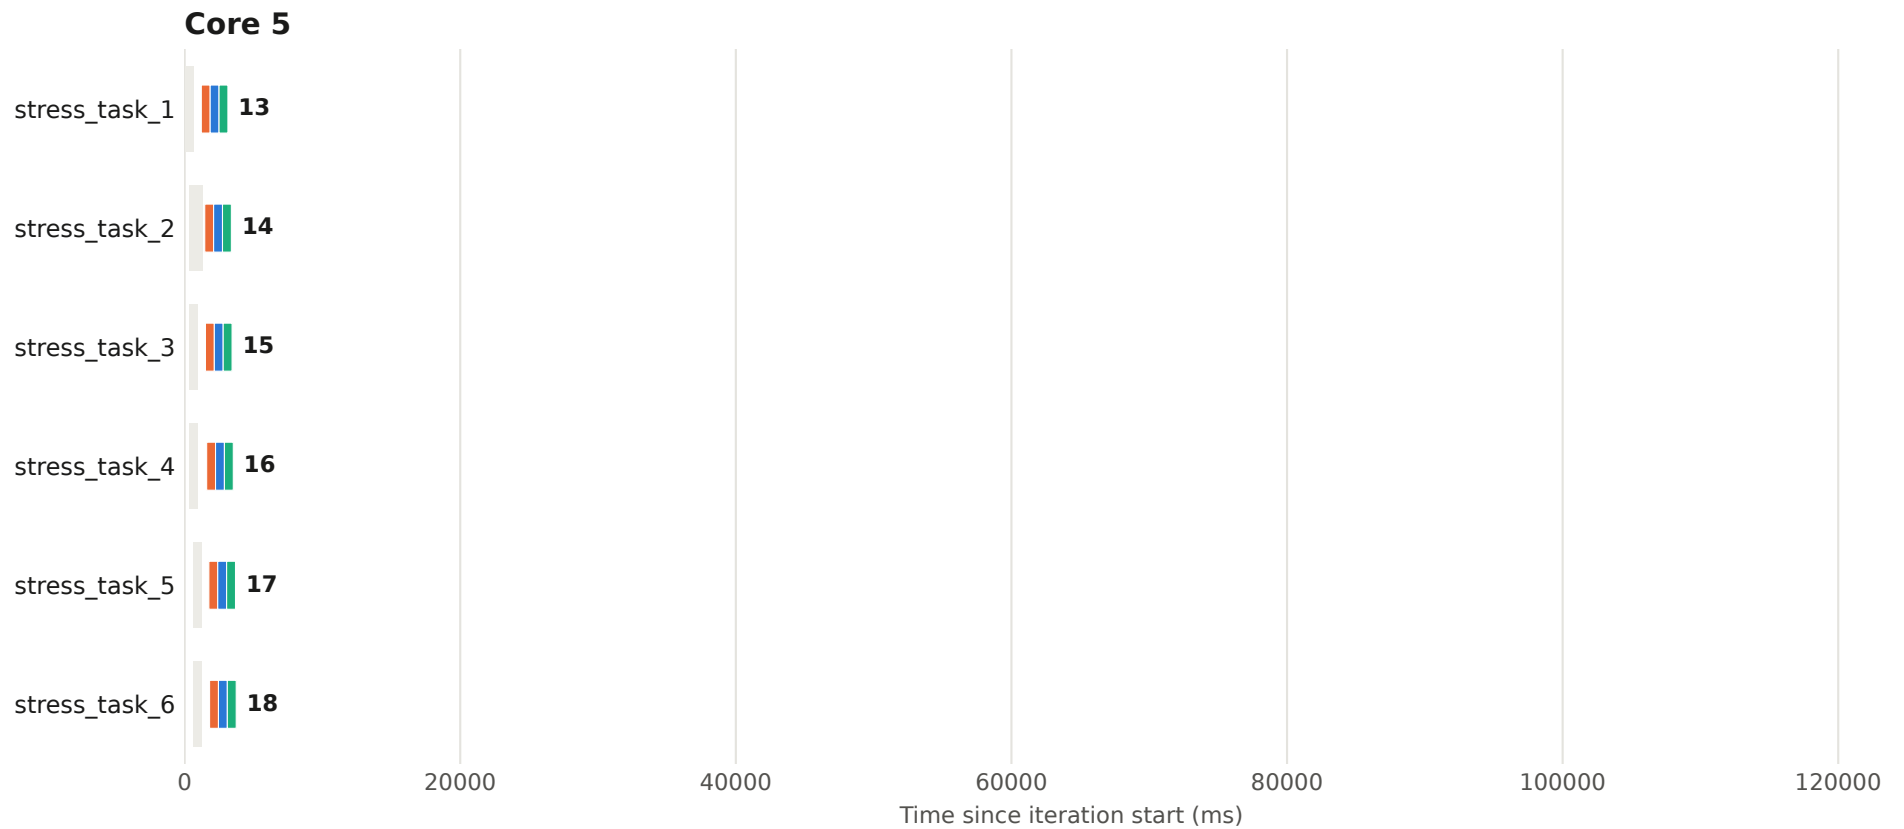


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 29 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

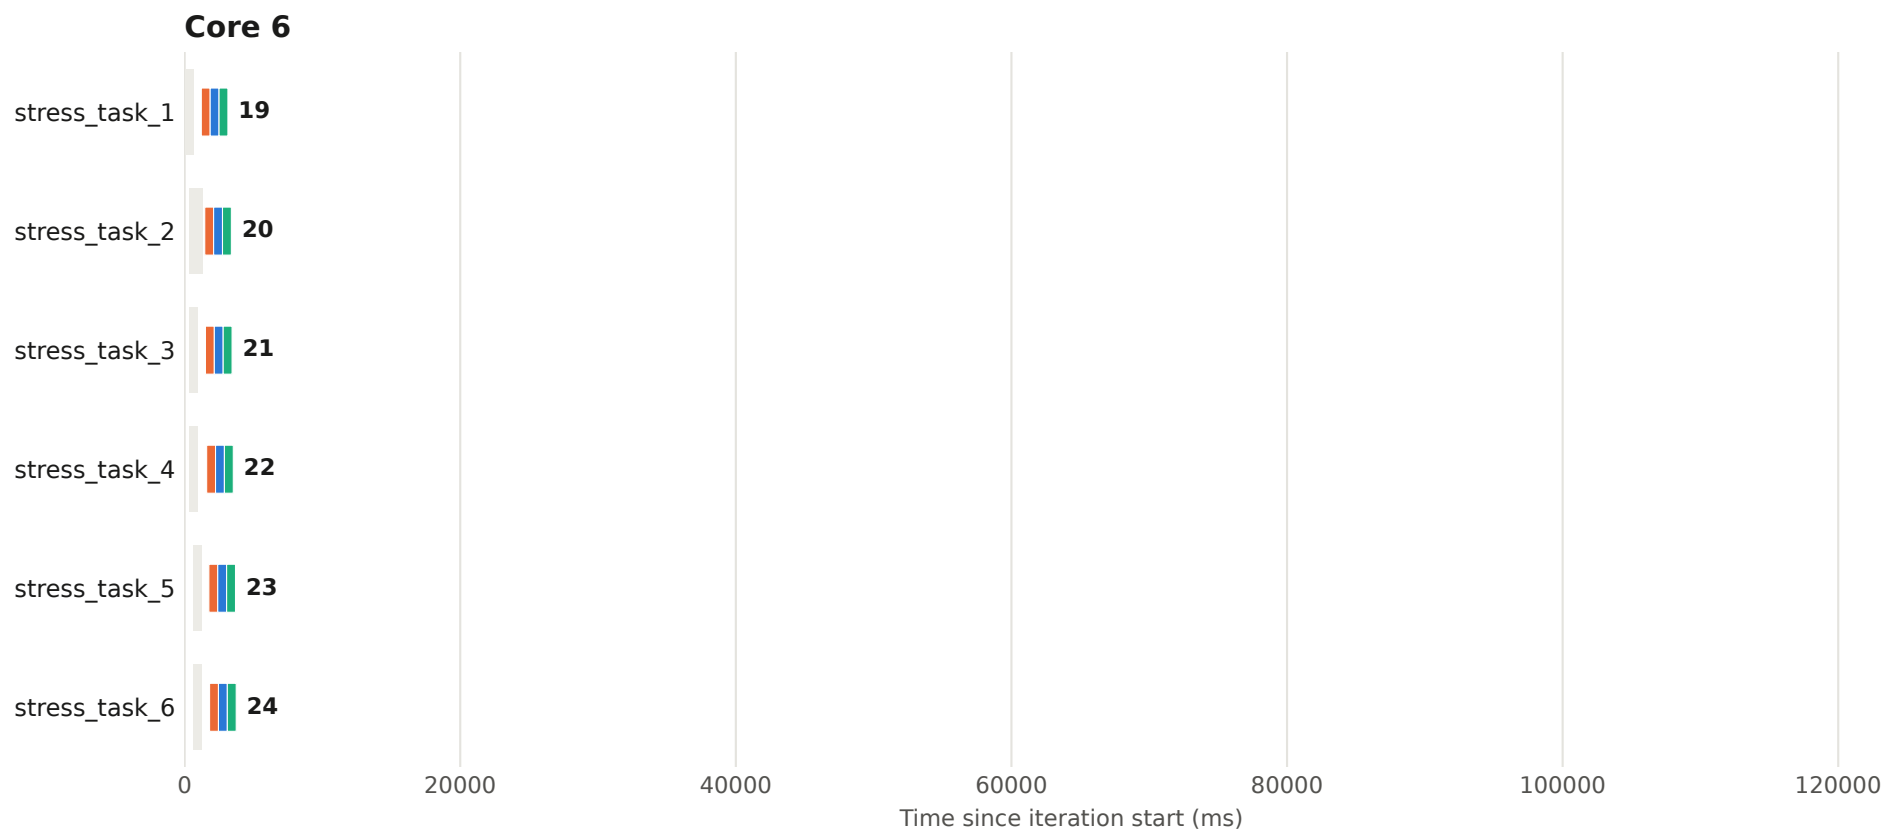


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 29 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

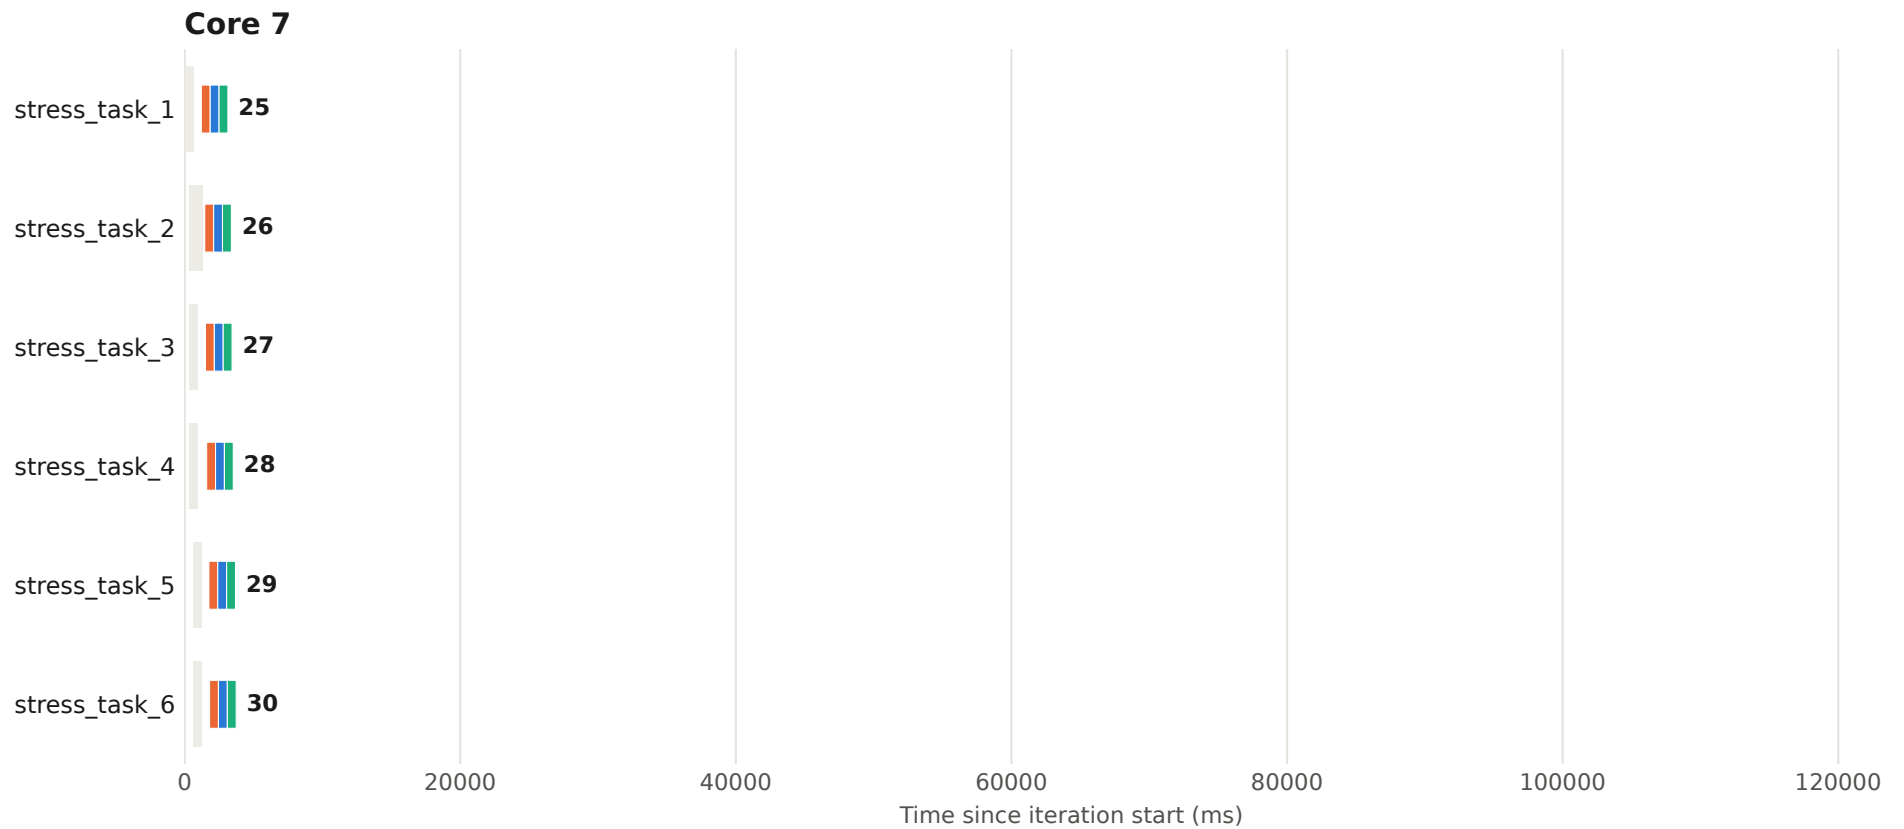


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 30 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

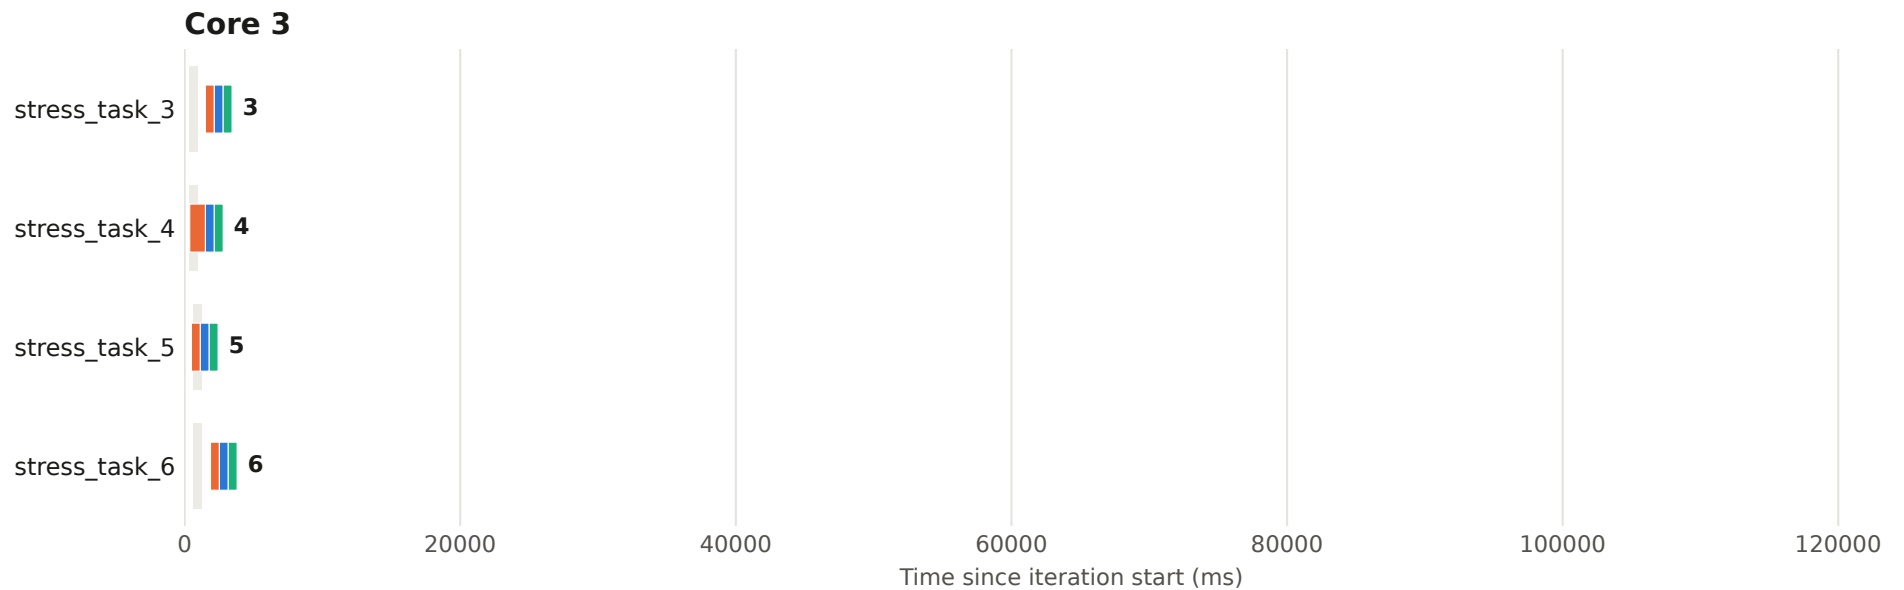

Execution plan - iteration 30 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

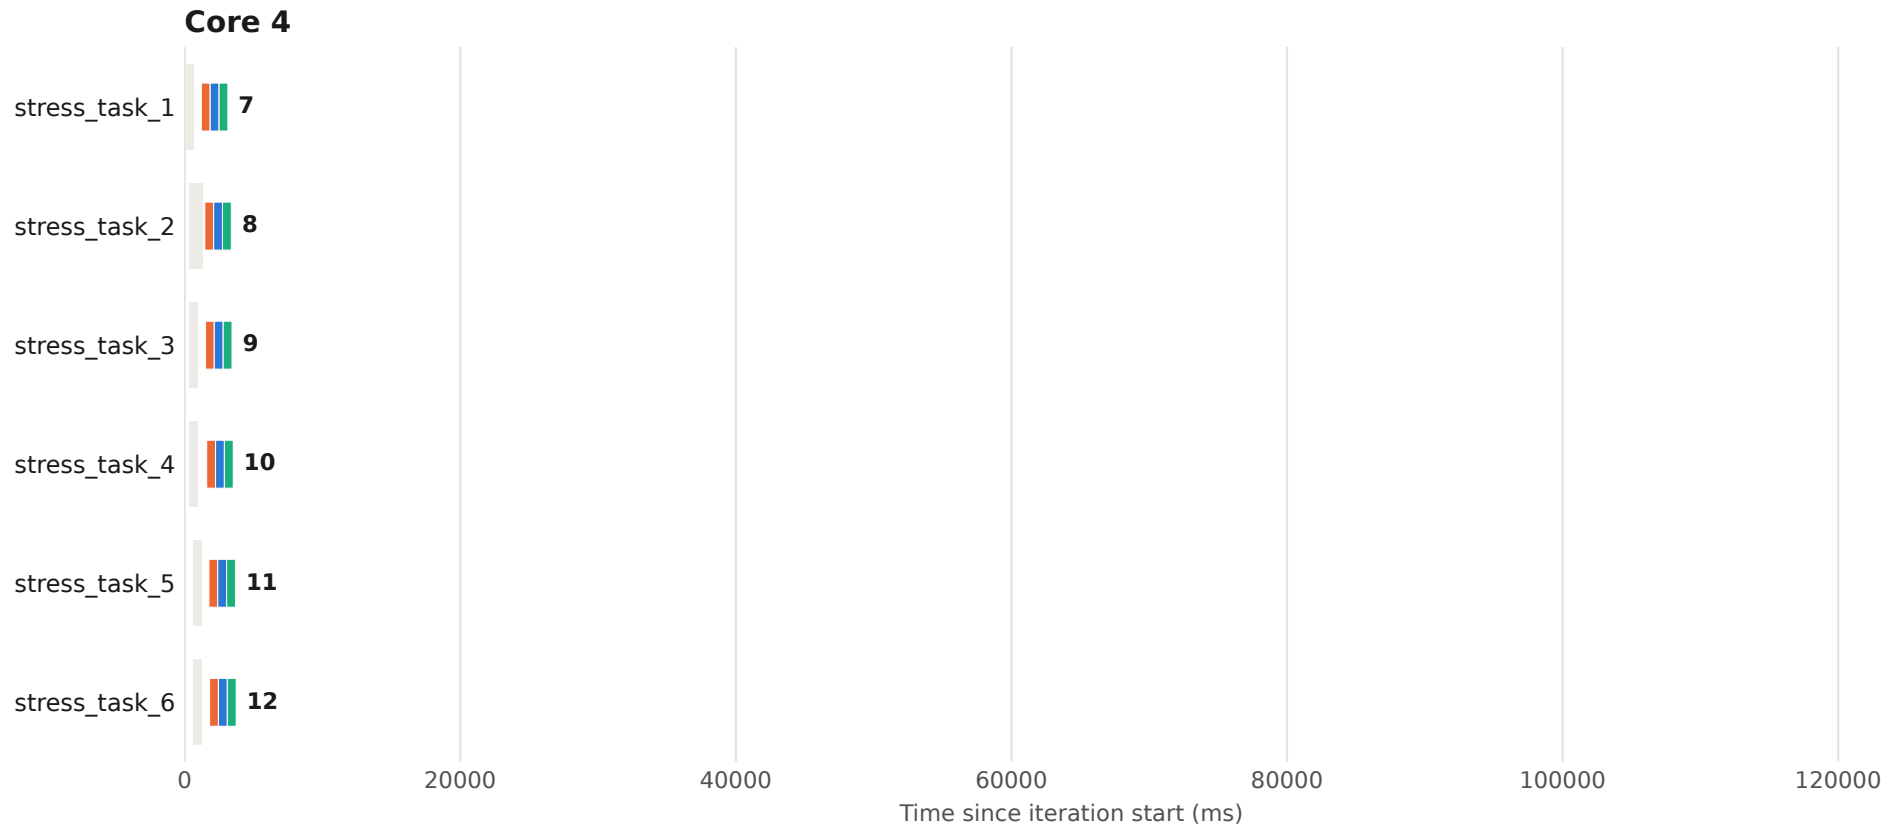


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 30 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

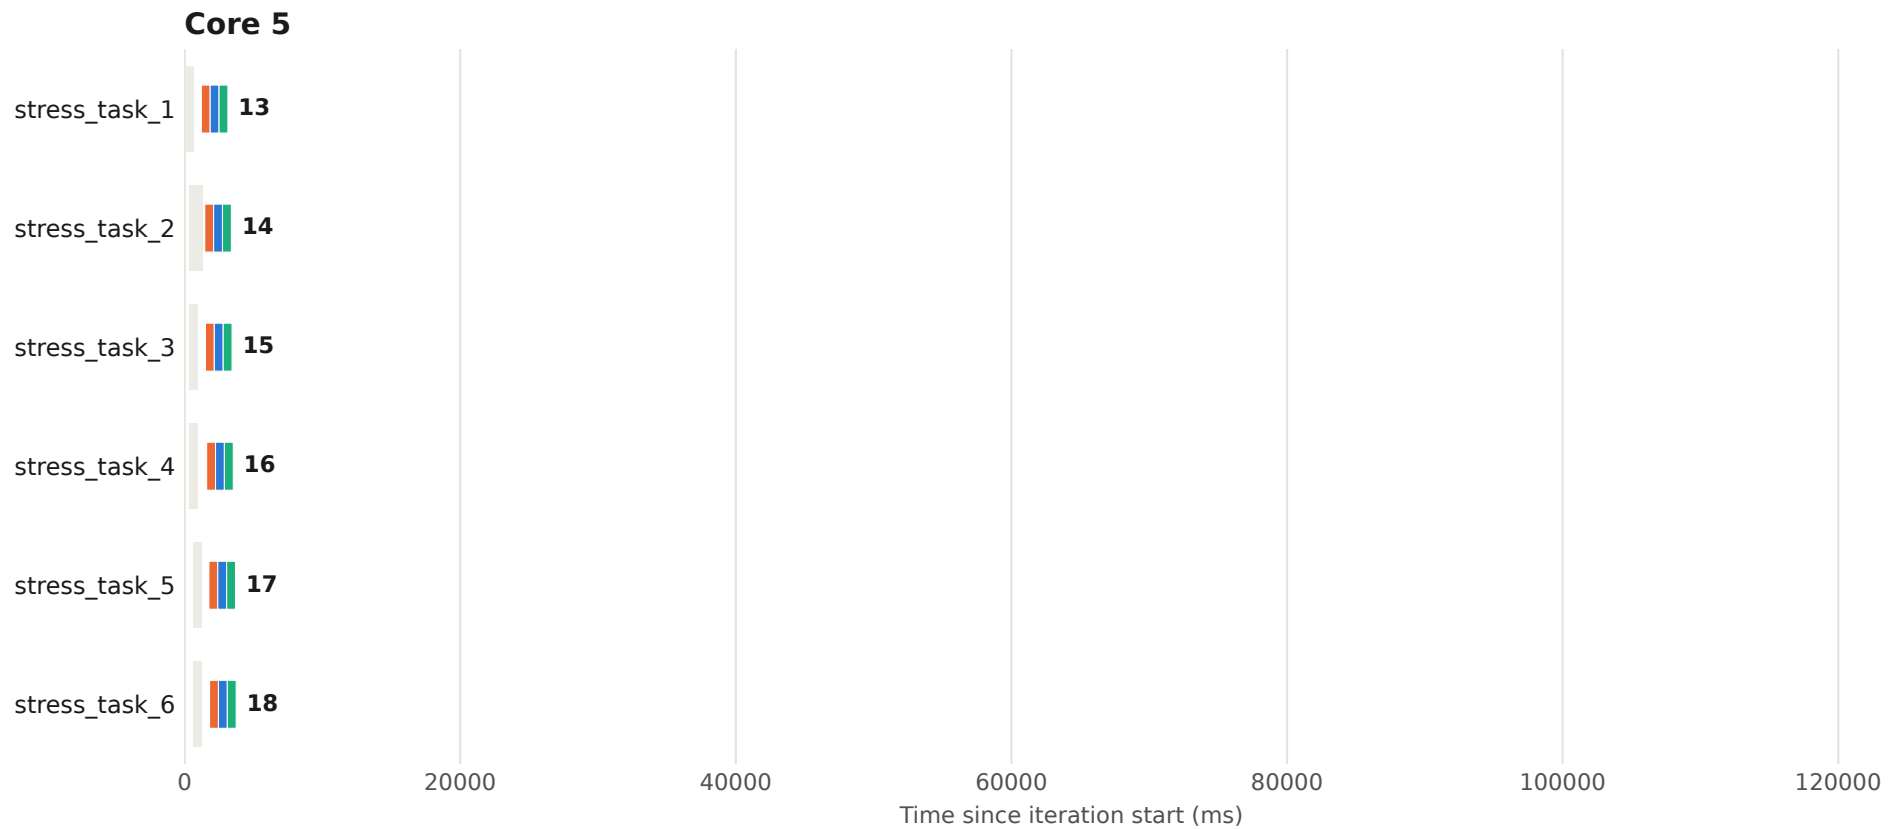


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 30 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

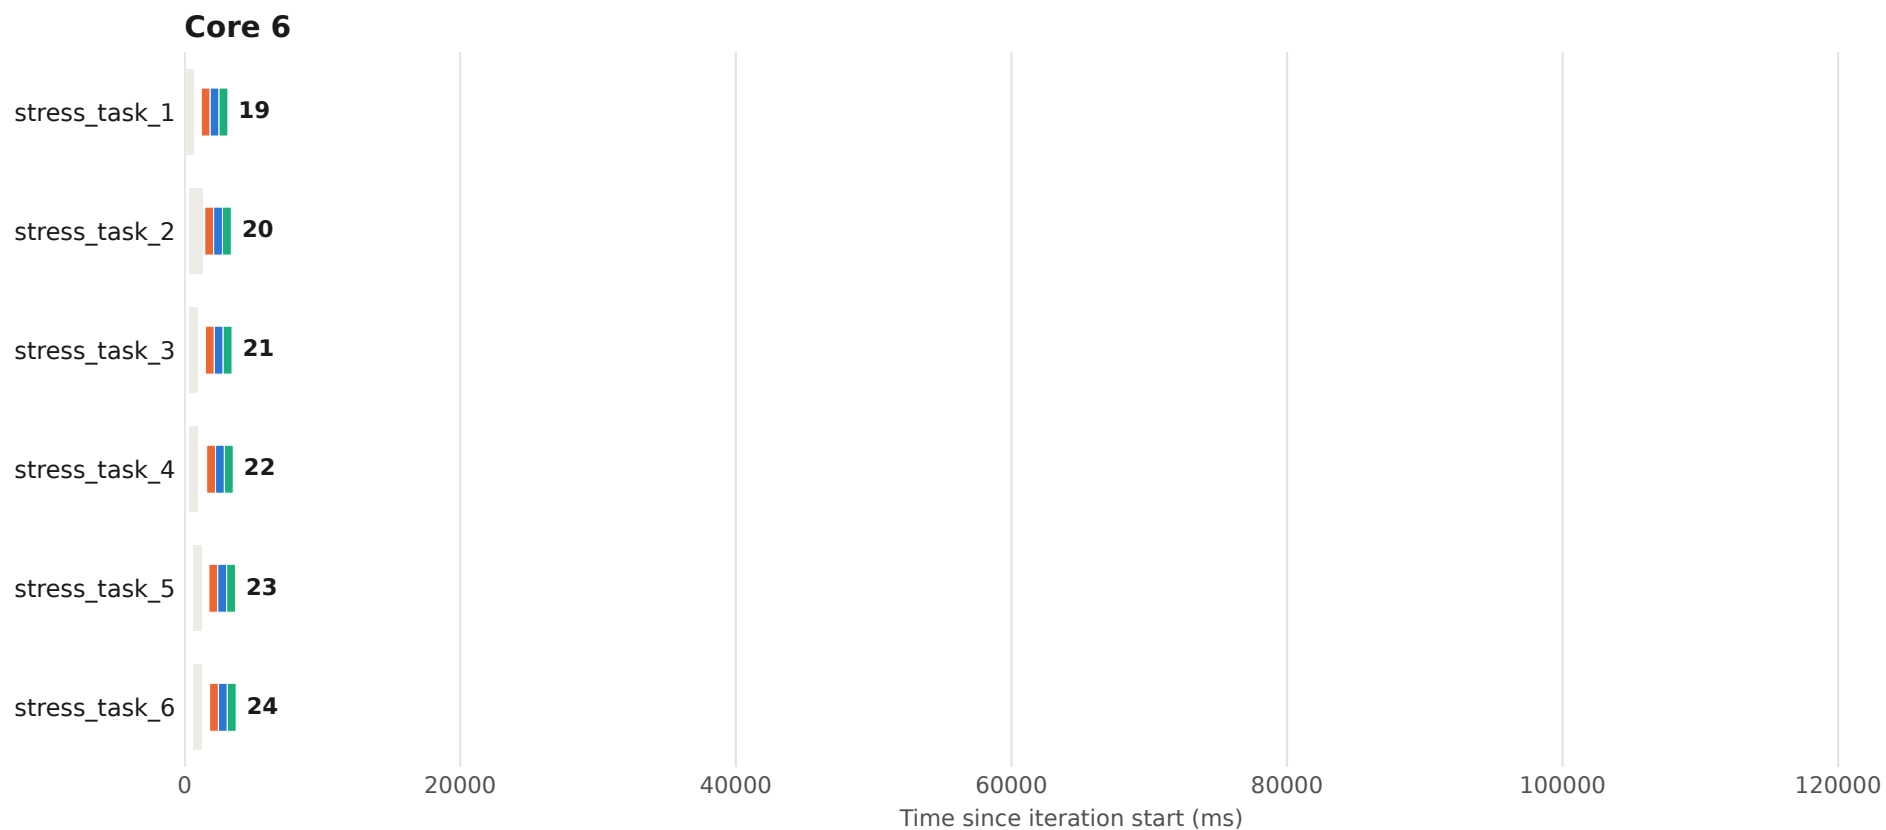


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 30 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

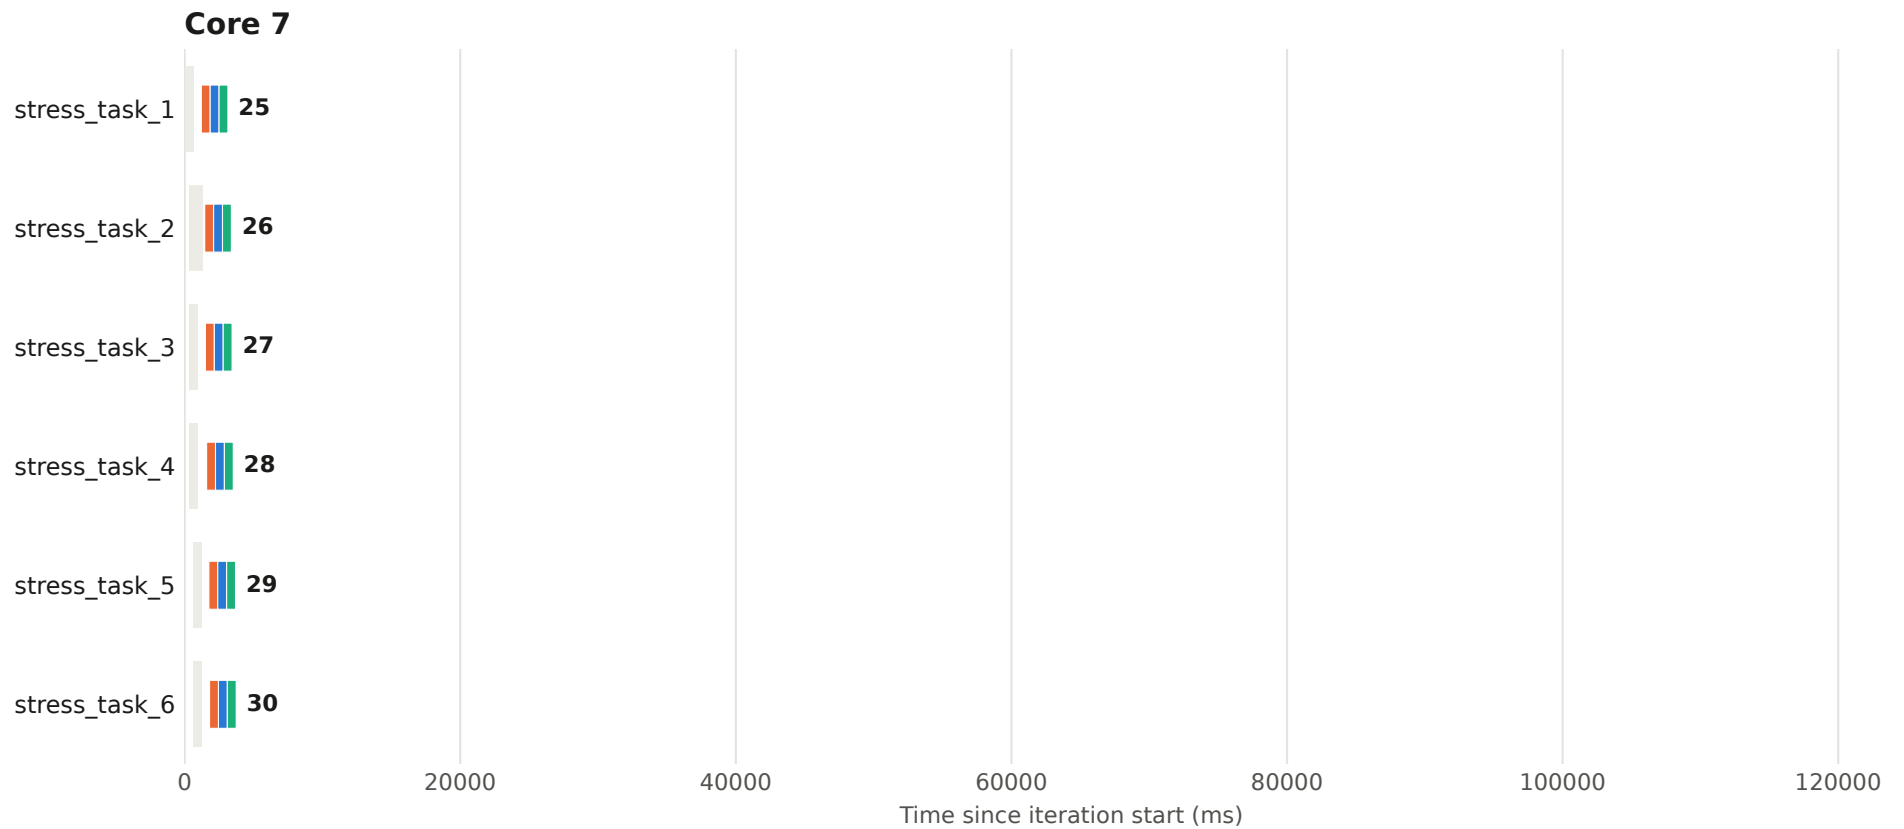


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 31 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

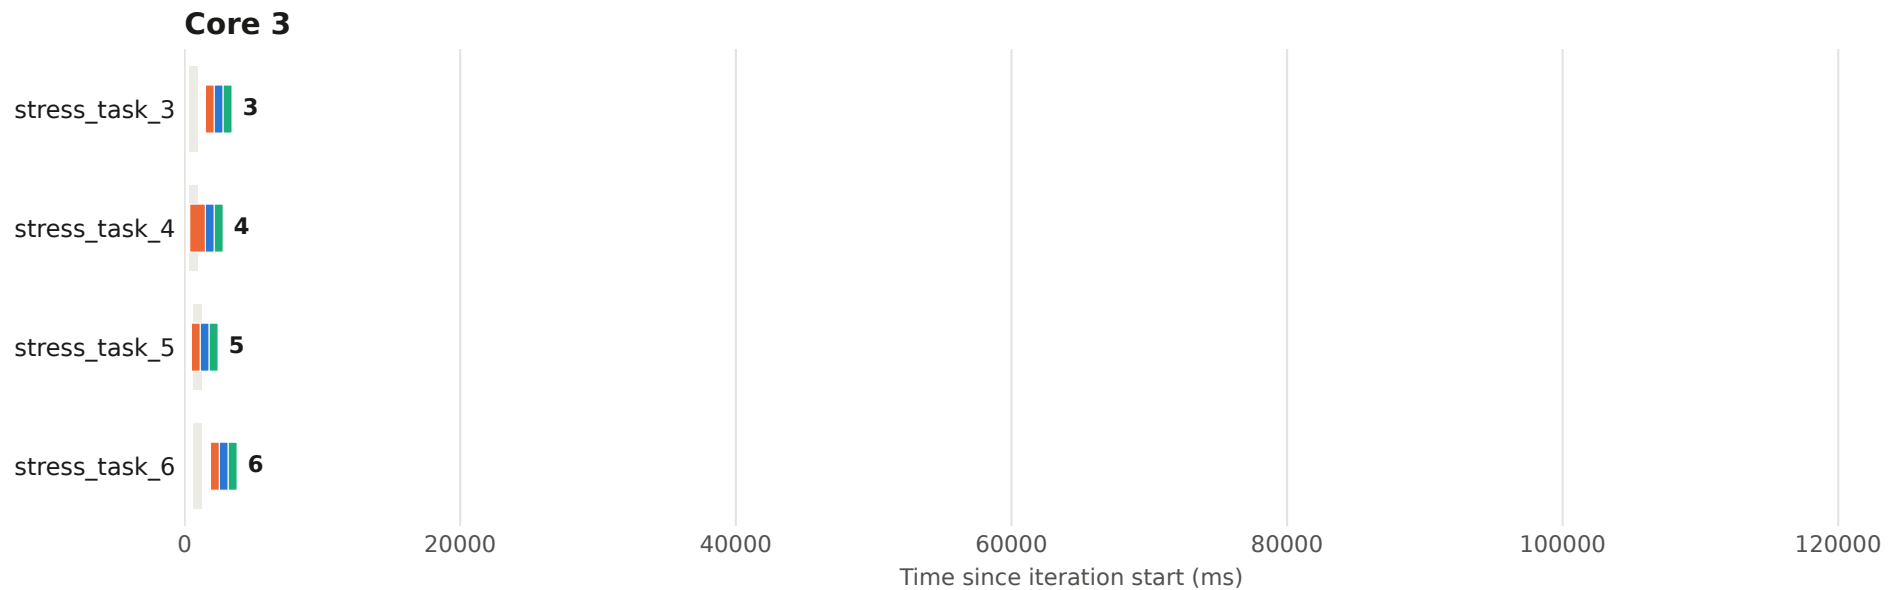

Execution plan - iteration 31 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

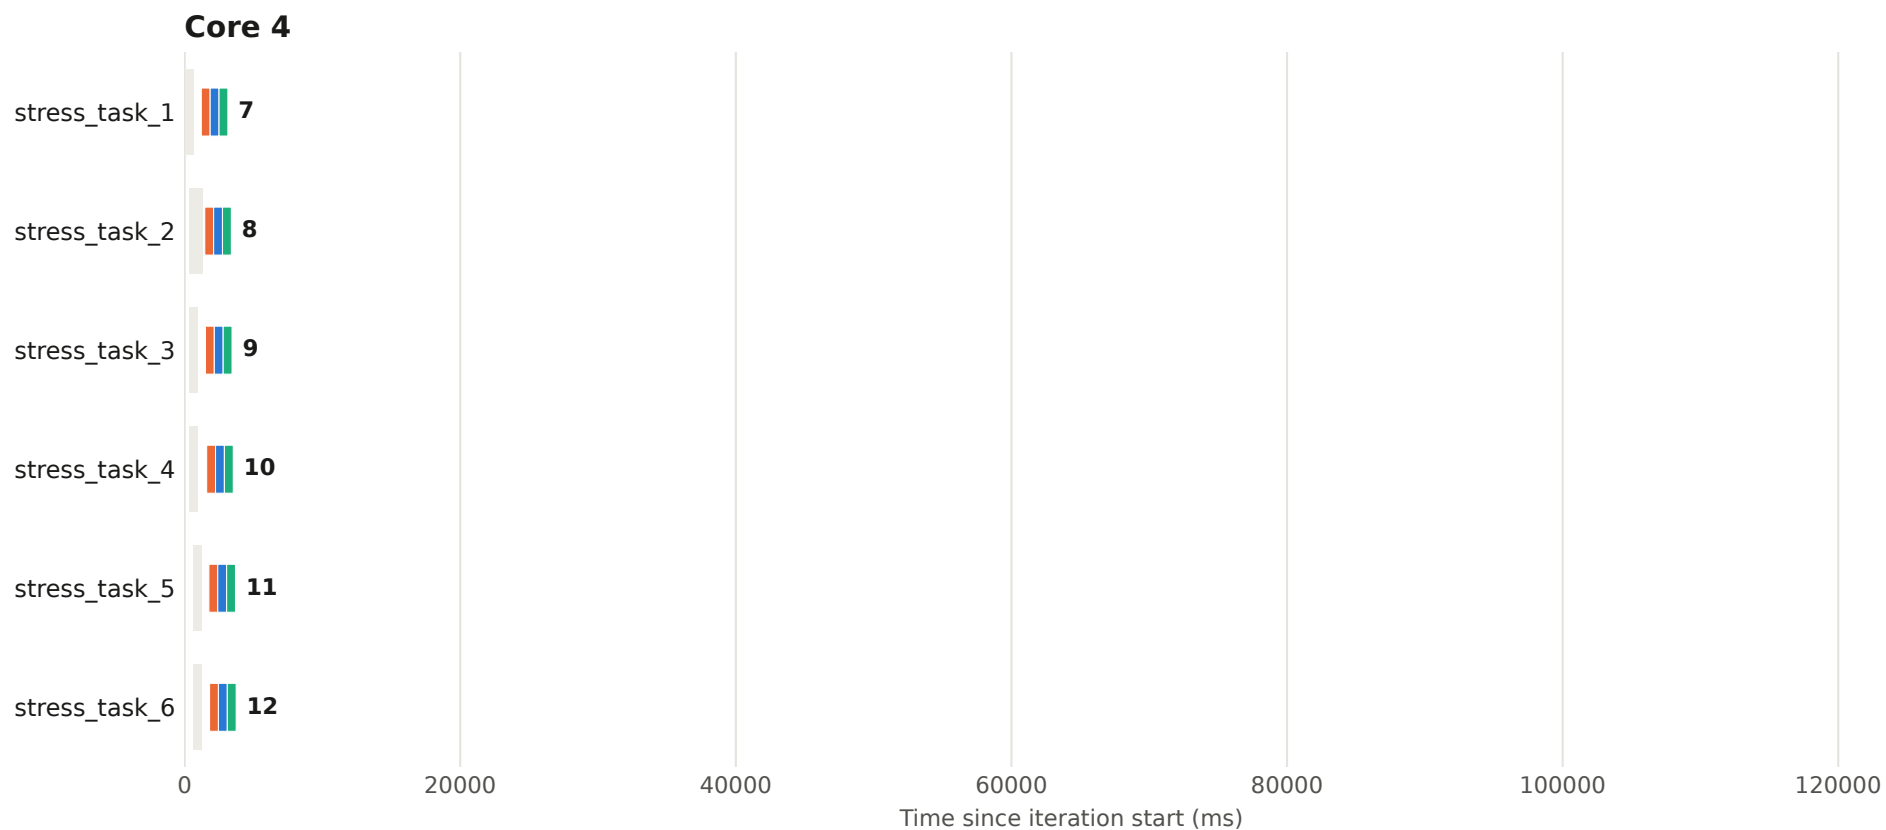


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 31 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

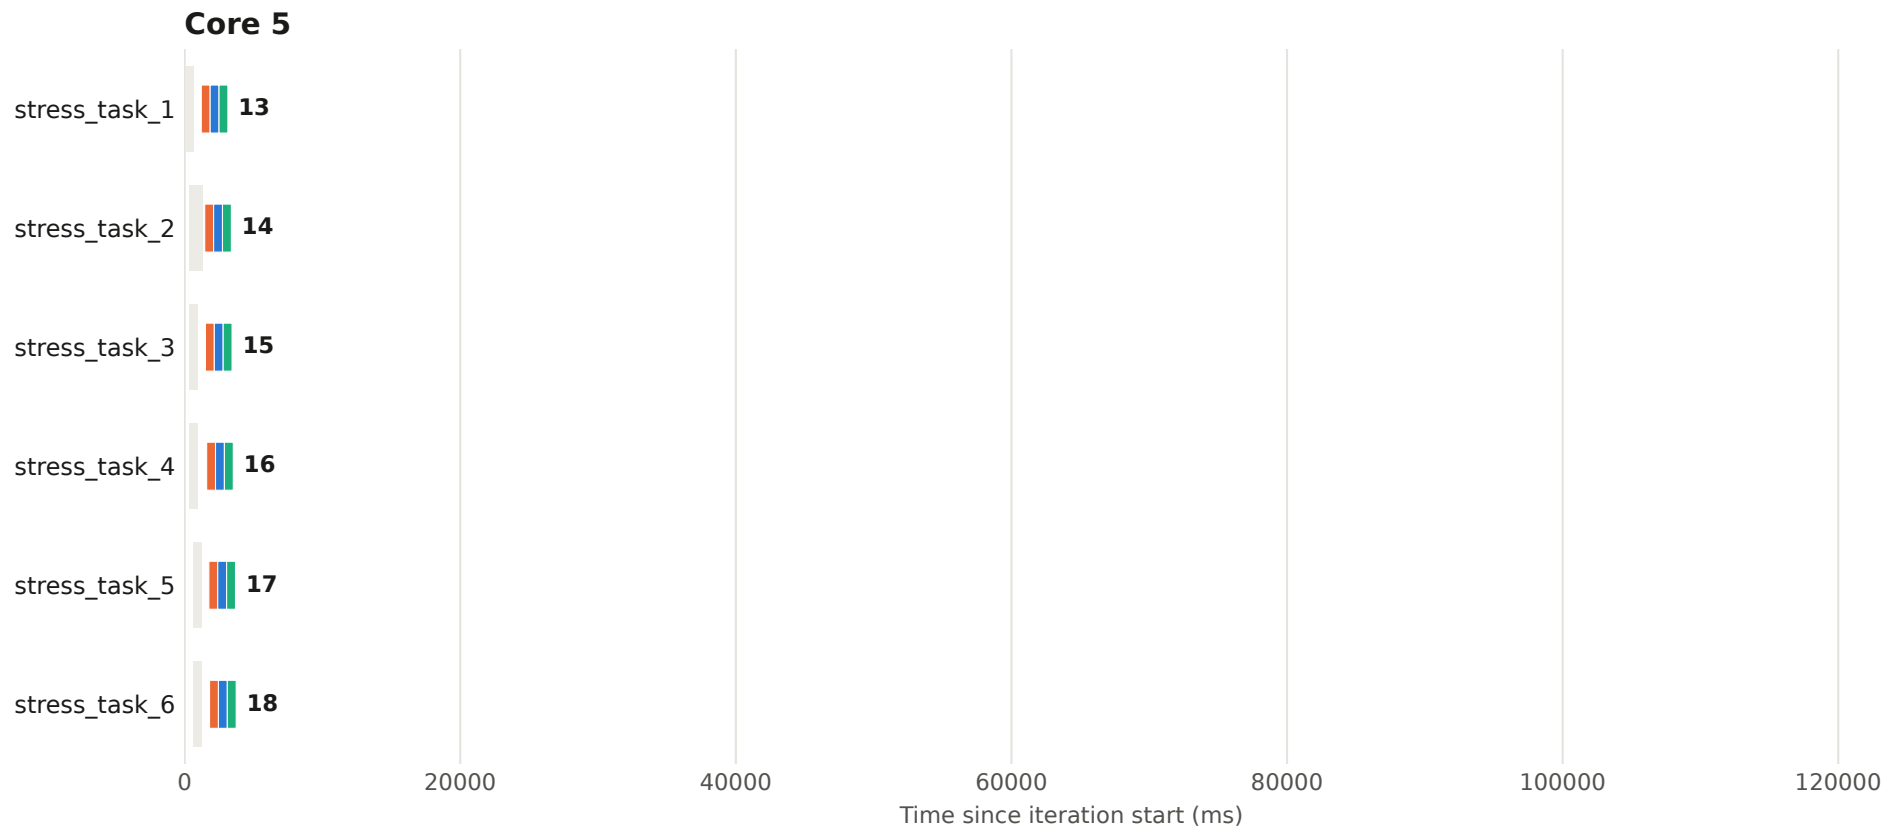


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 31 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

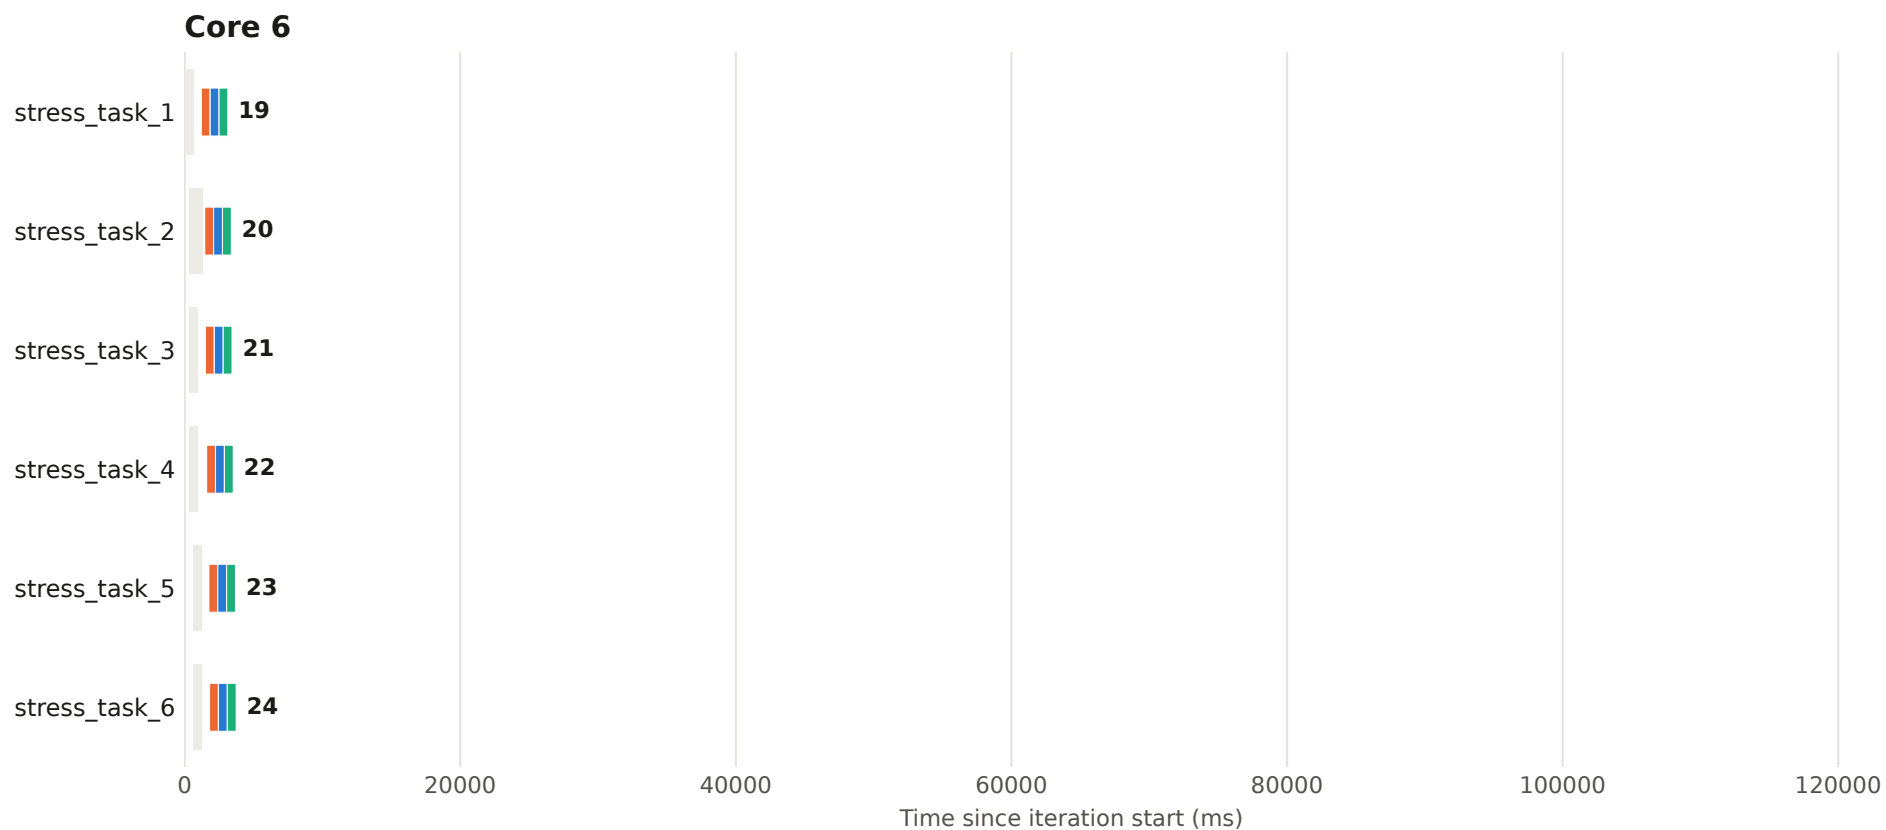


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 31 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

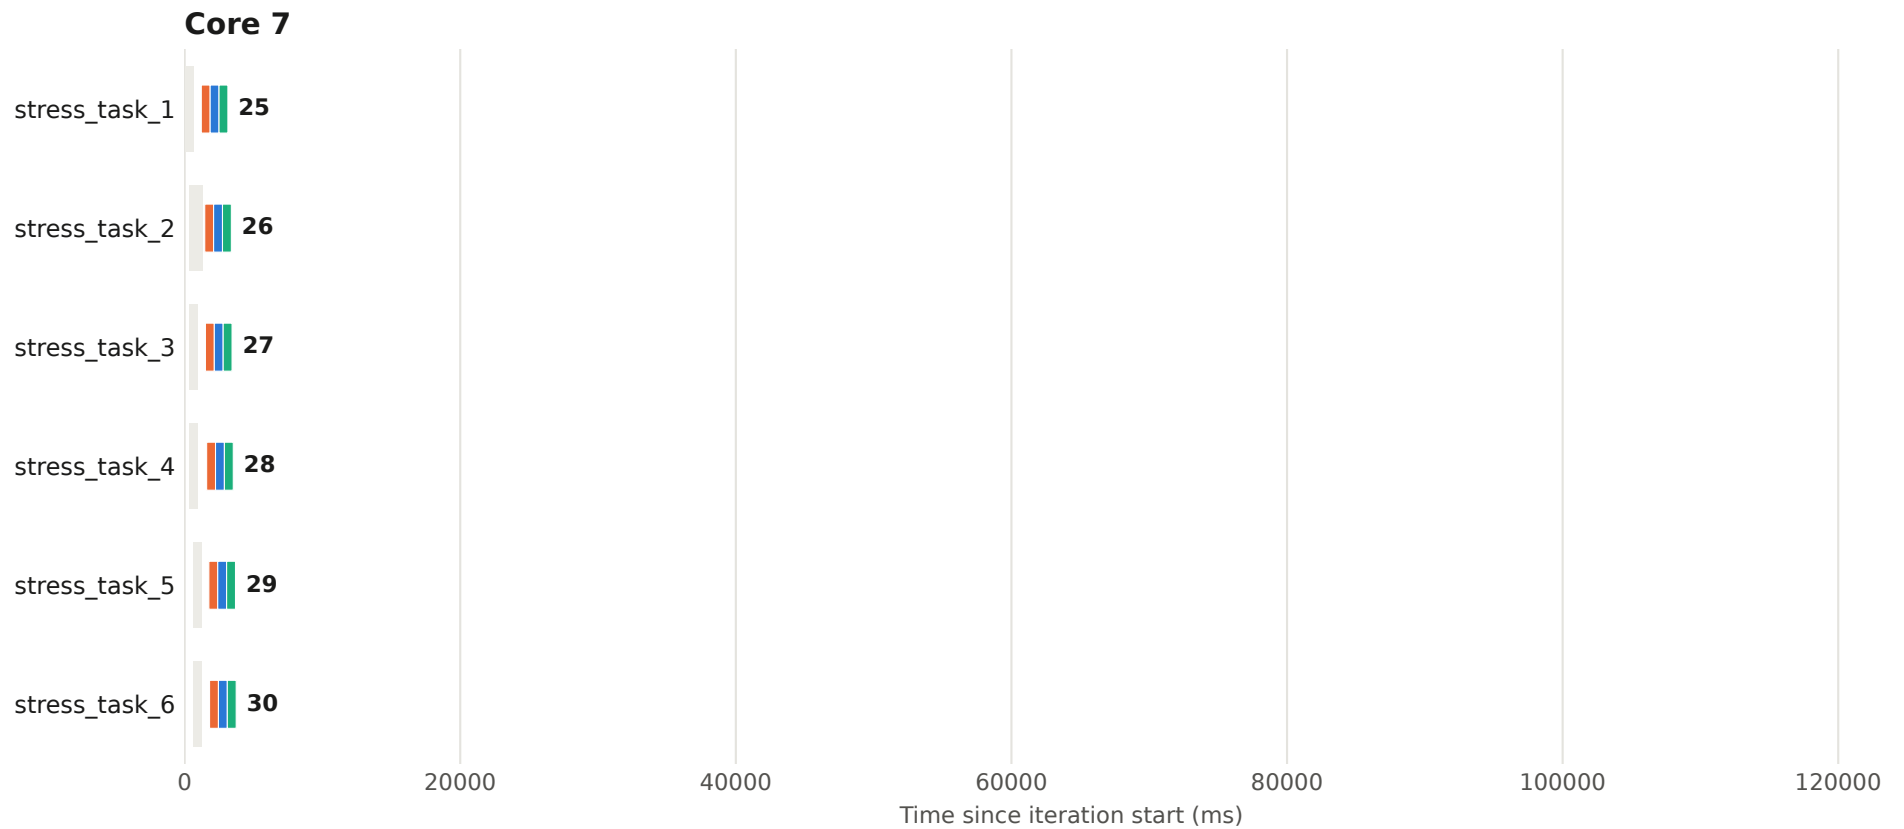


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 32 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

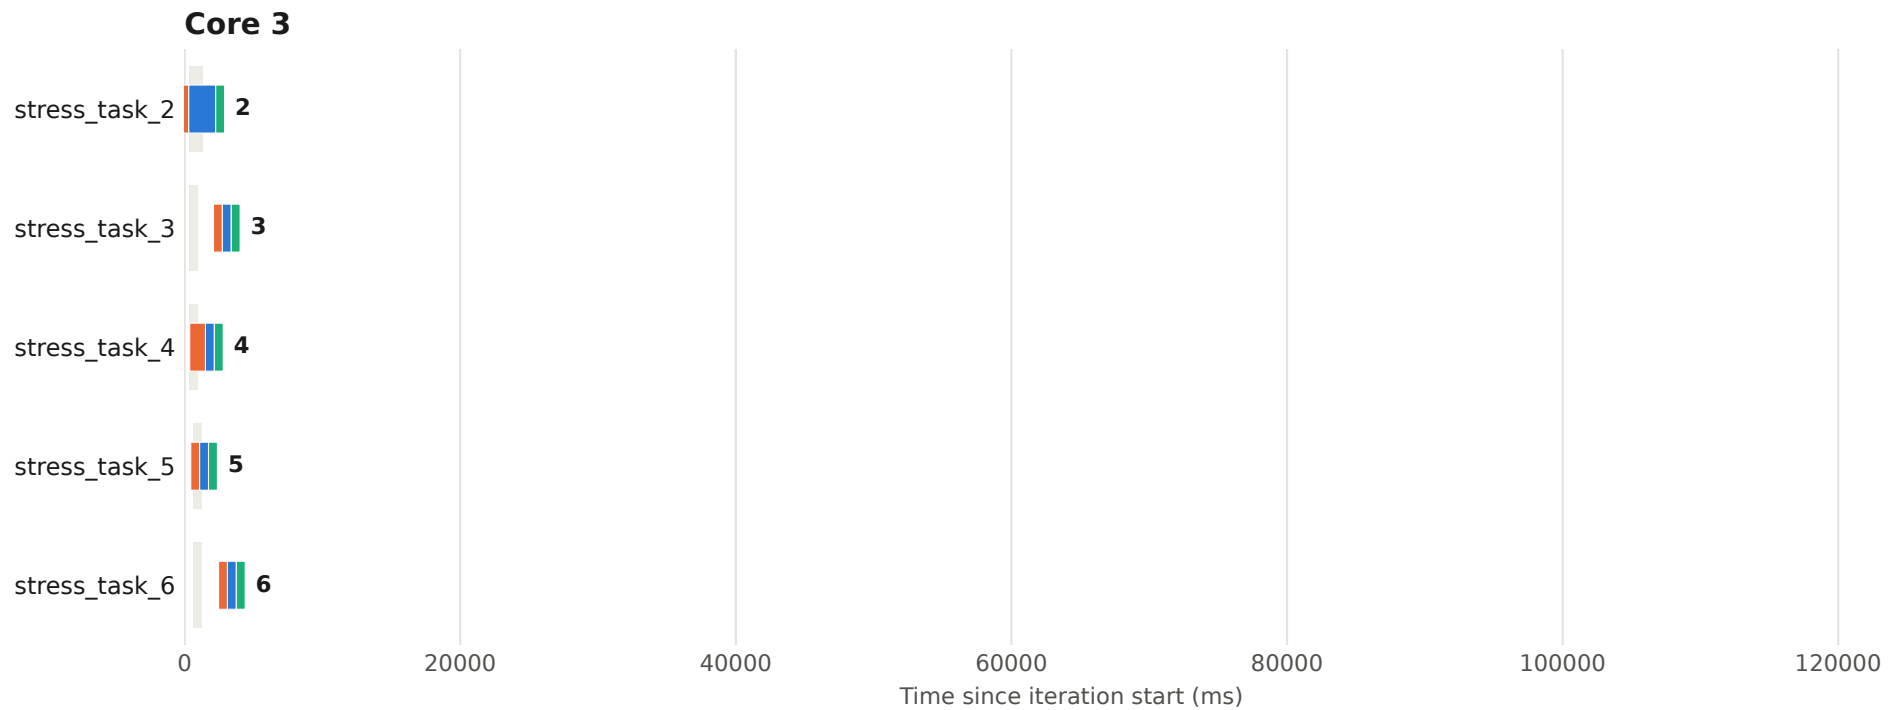

Execution plan - iteration 32 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

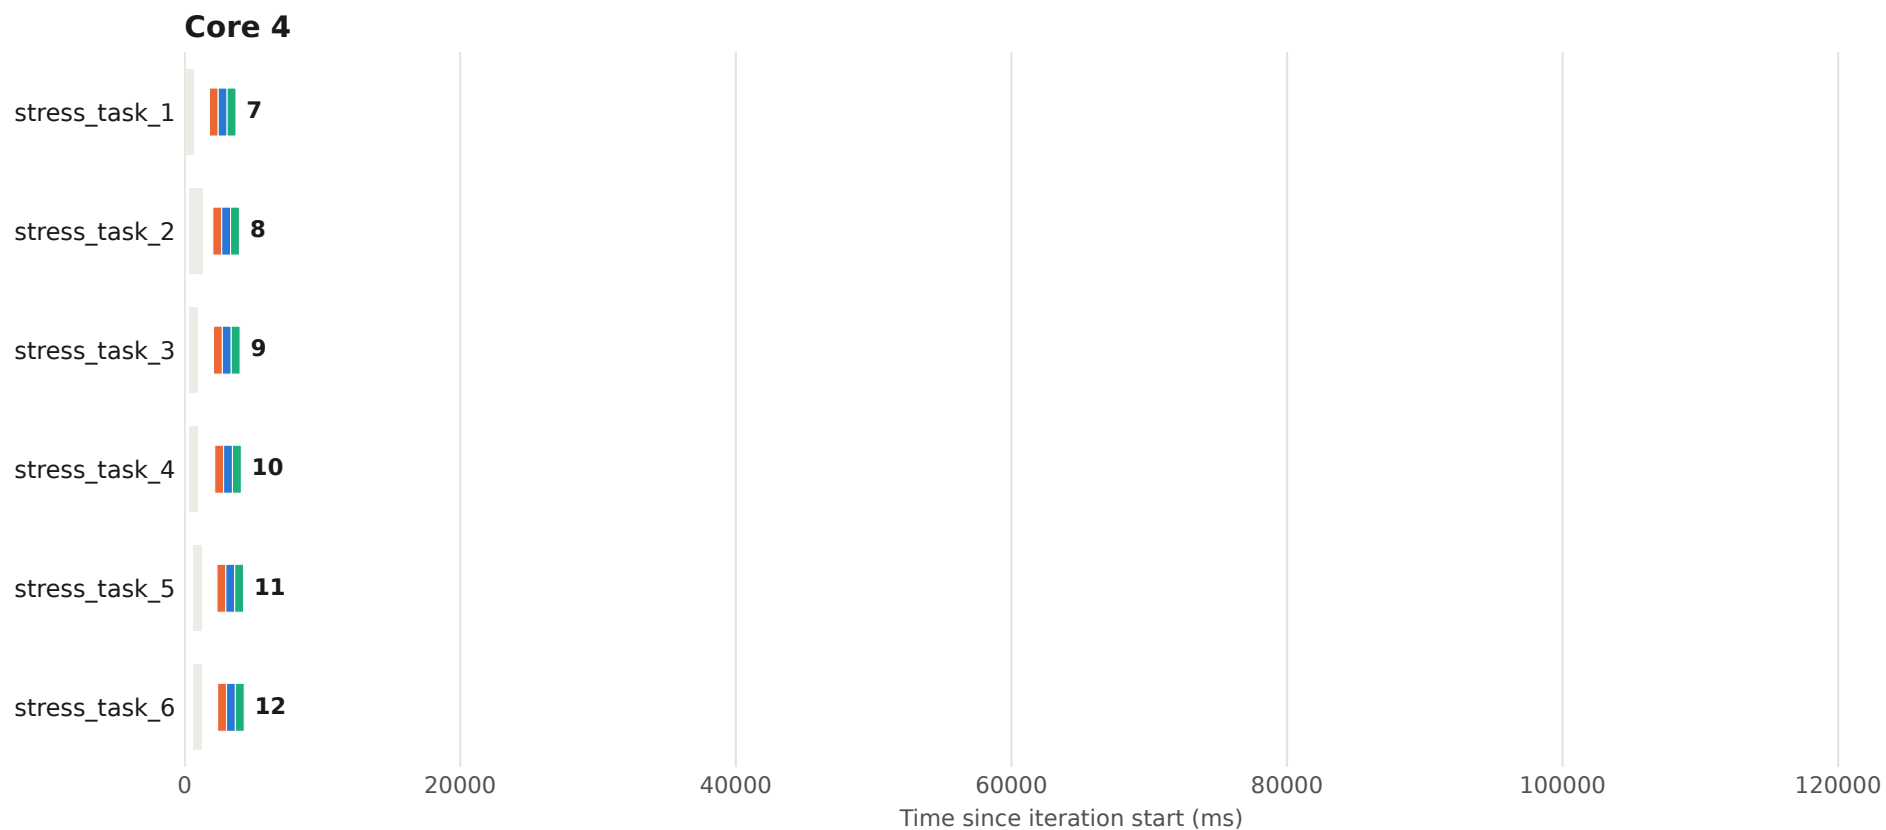


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 32 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

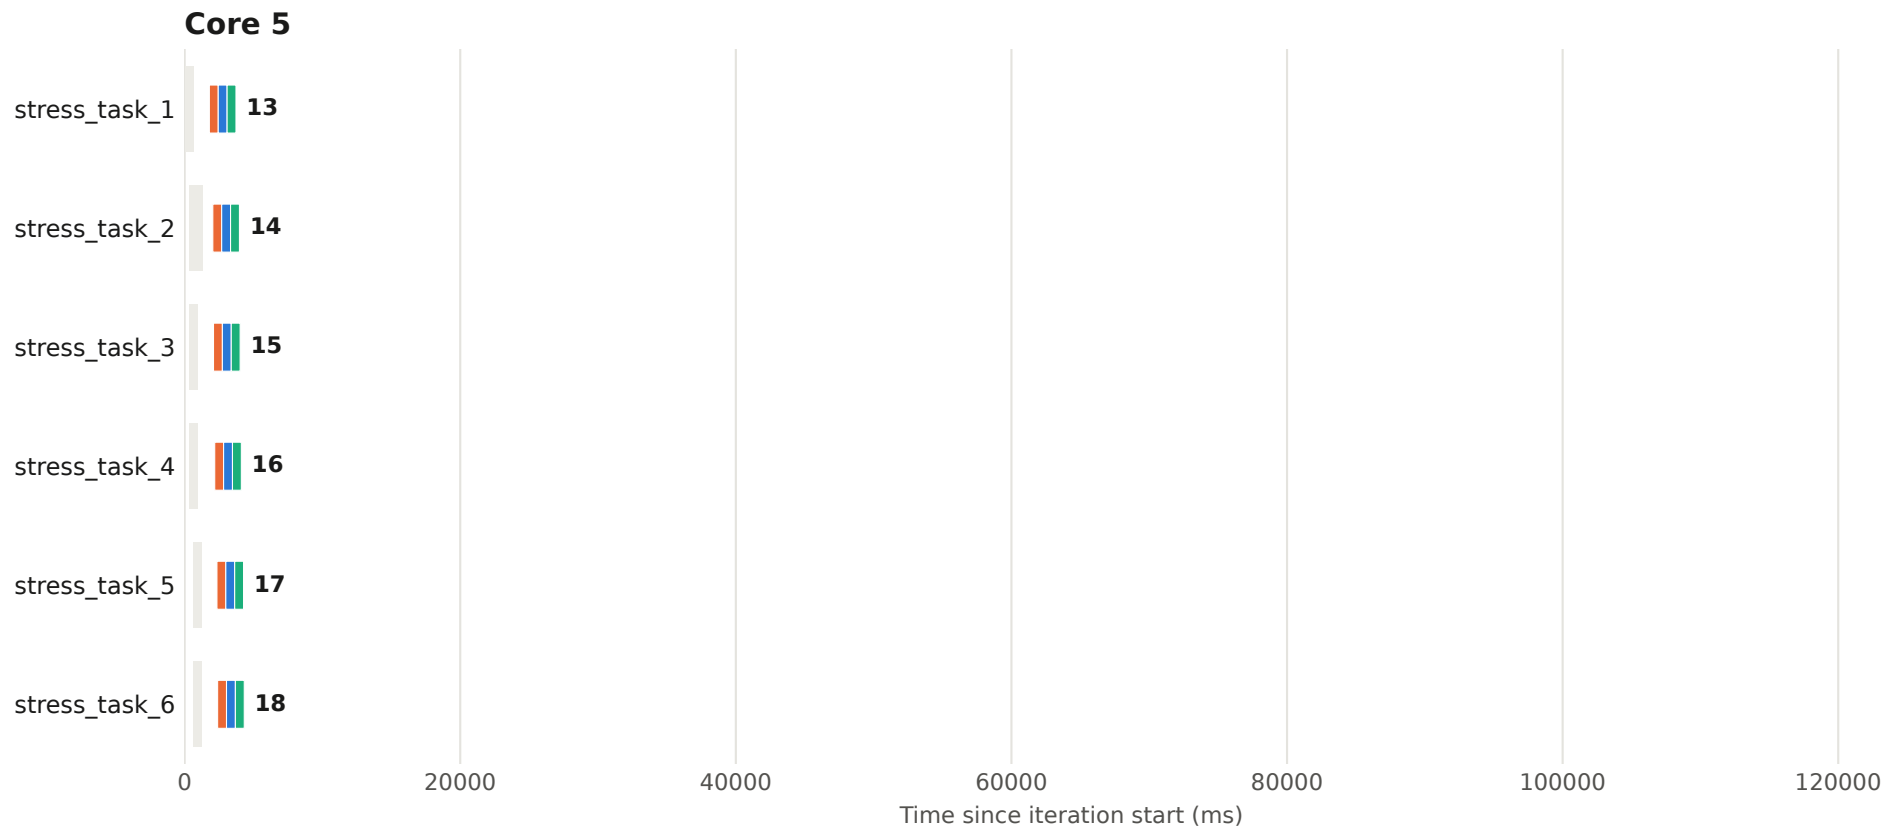


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 32 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

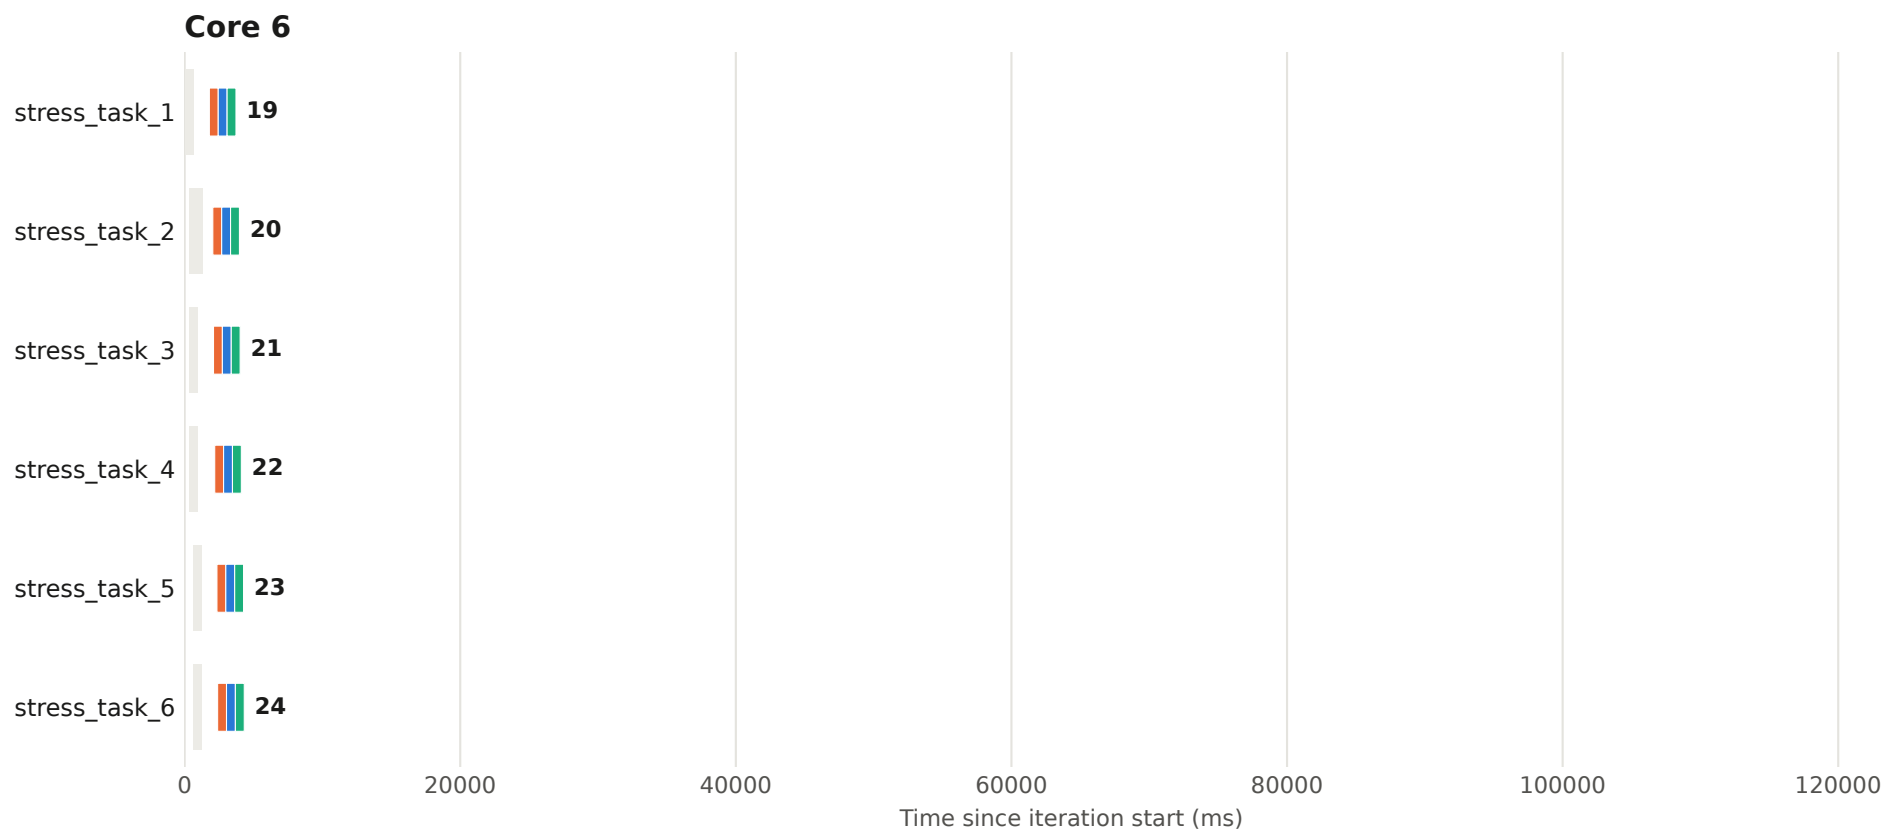


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 32 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

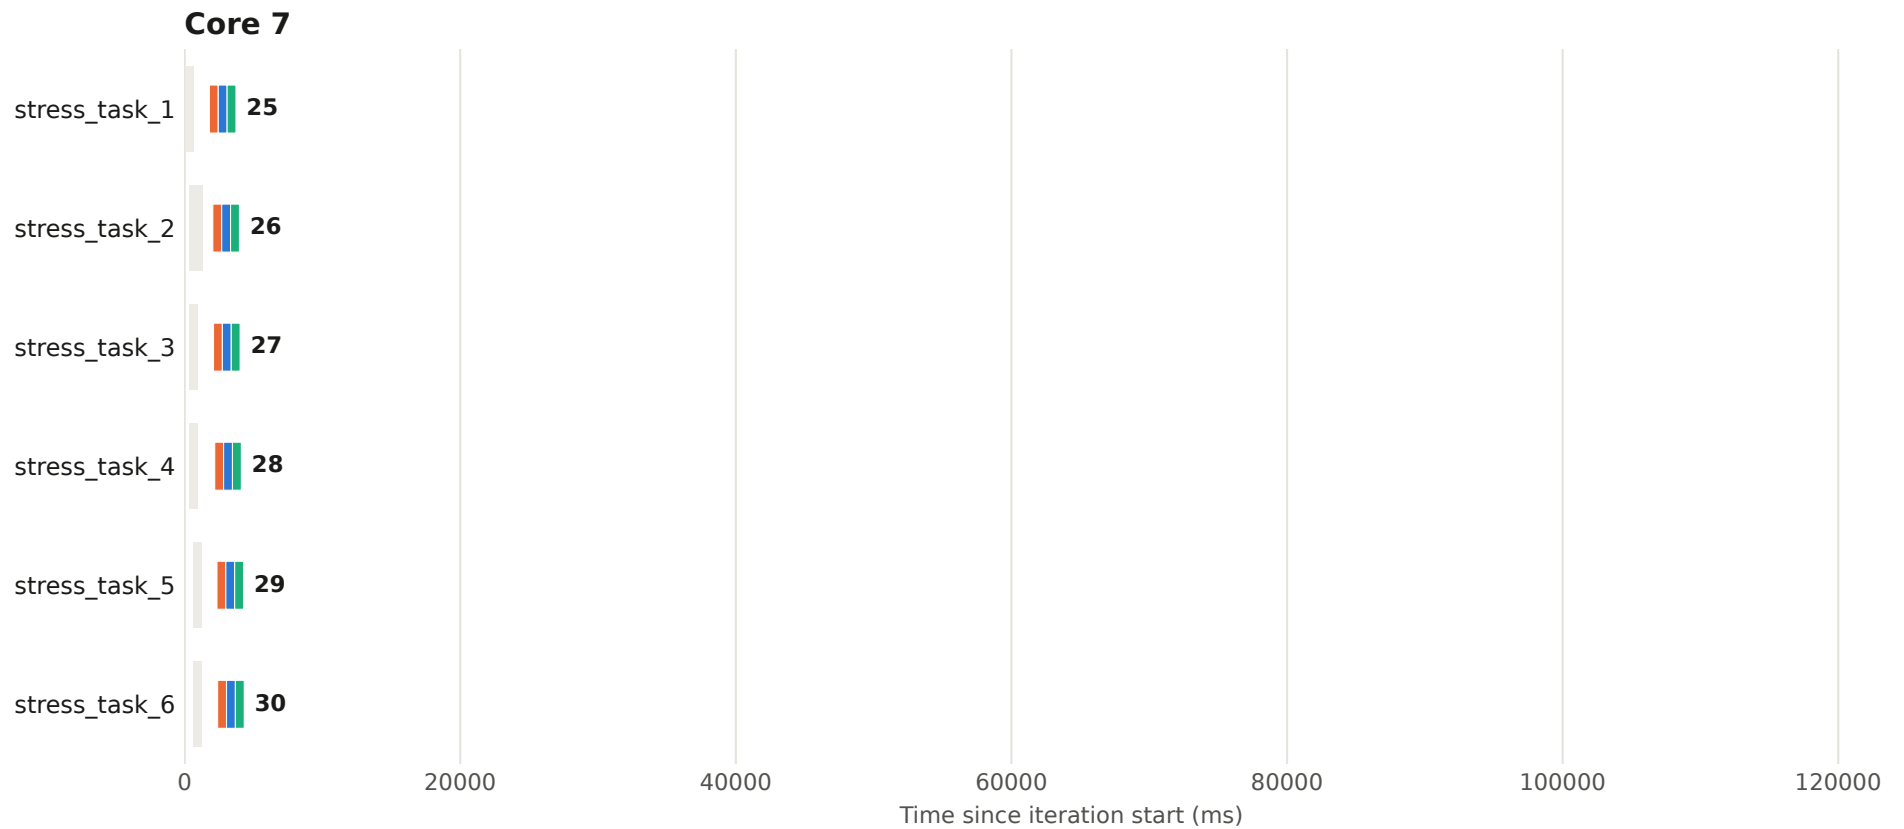


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 33 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

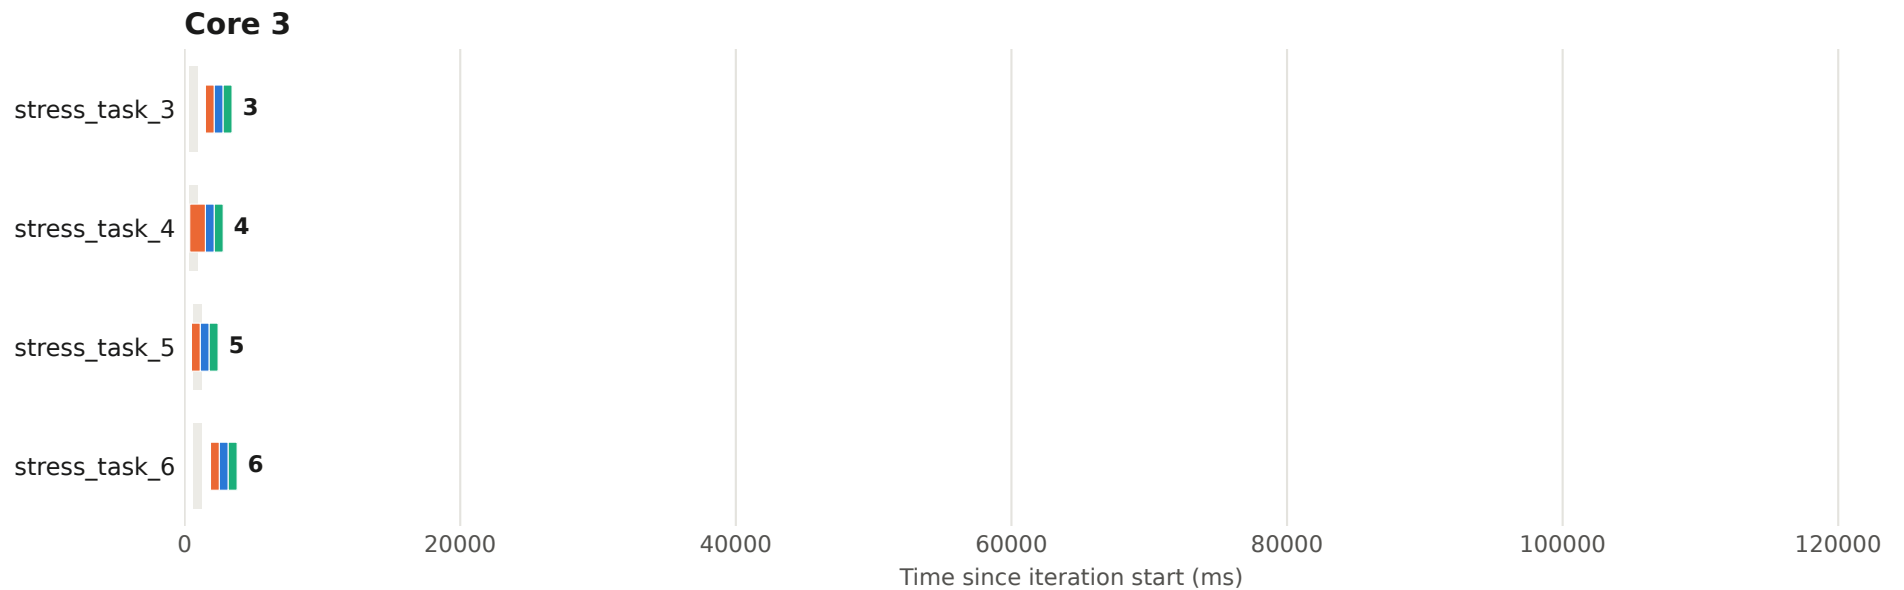

Execution plan - iteration 33 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

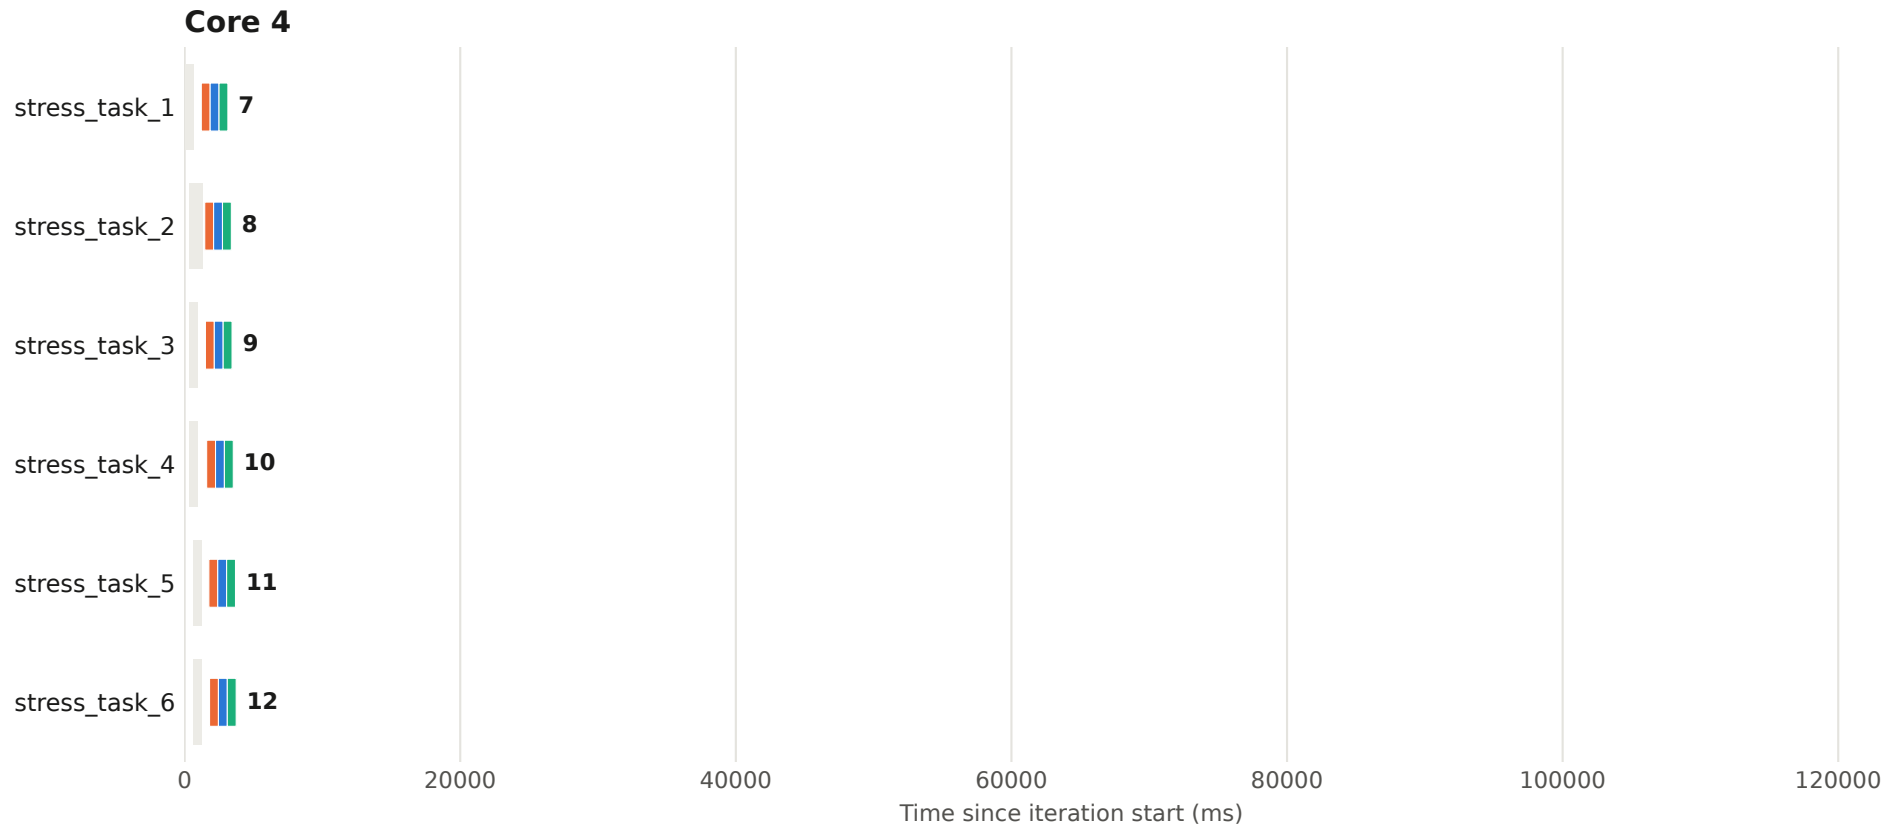


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 33 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

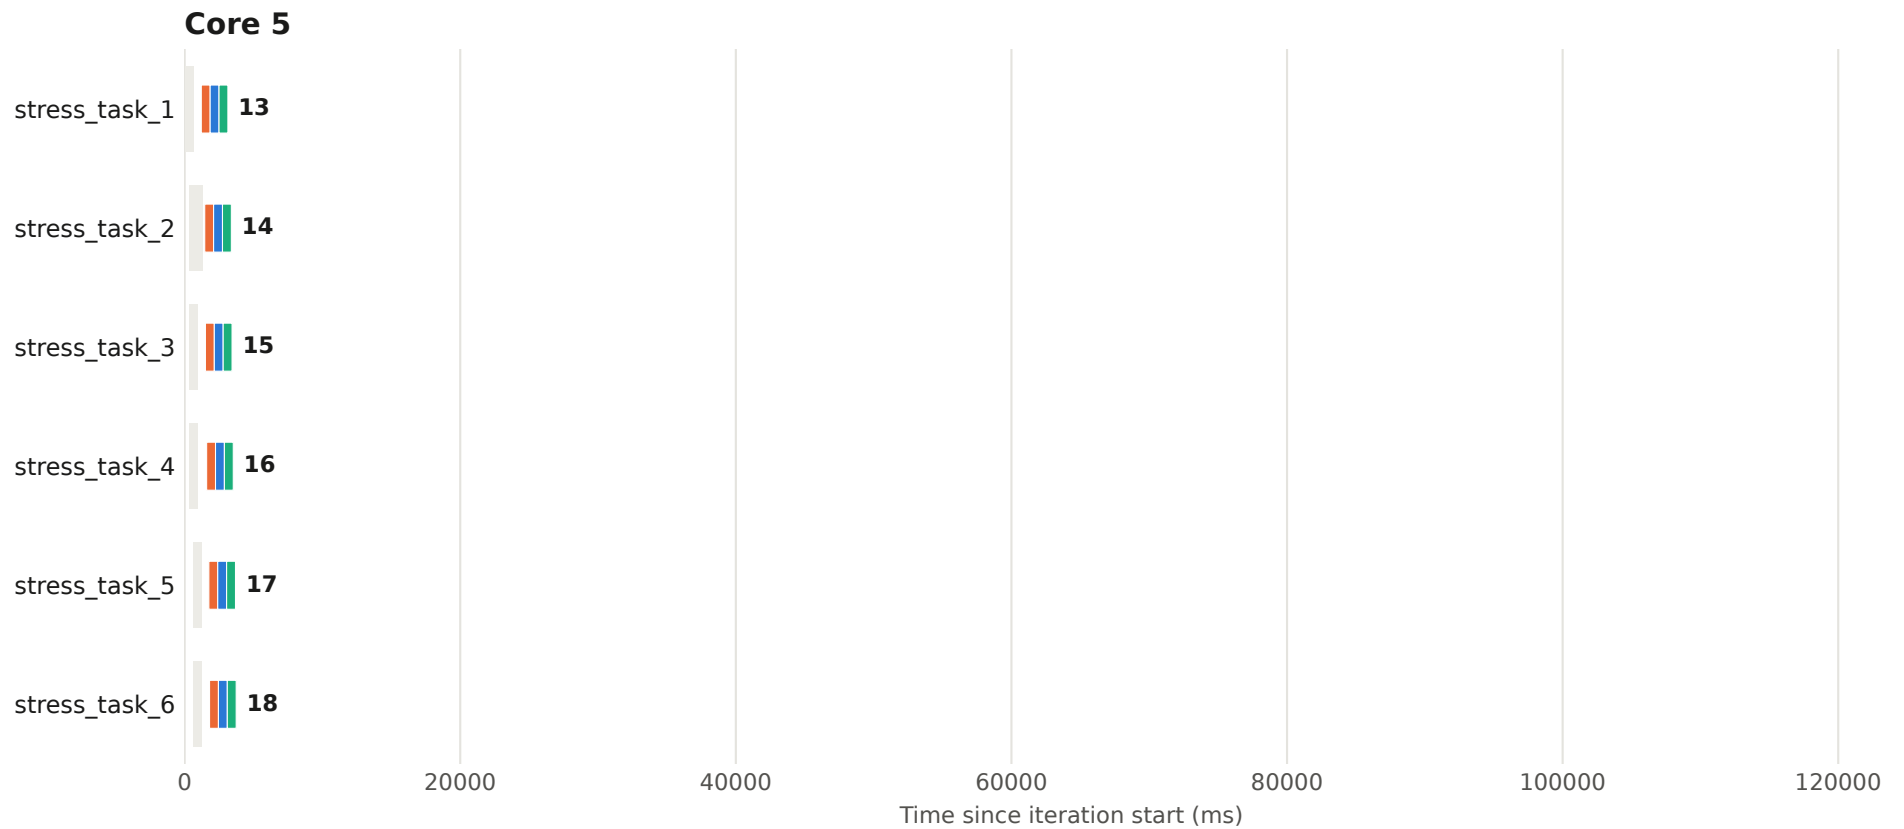


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 33 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

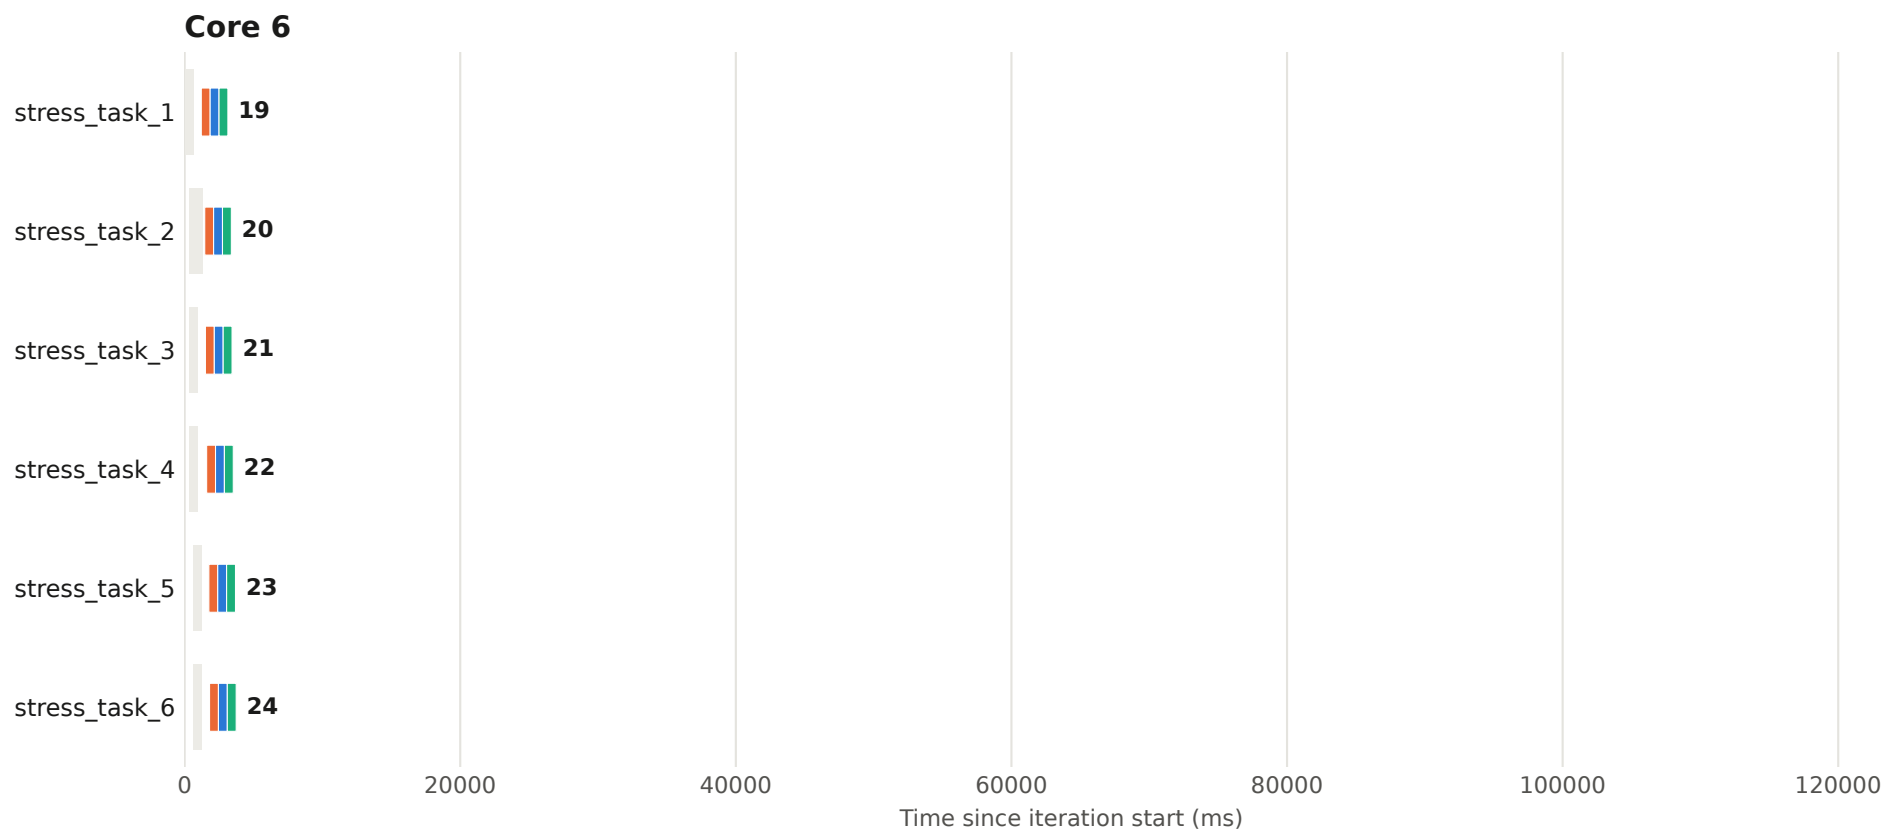


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 33 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

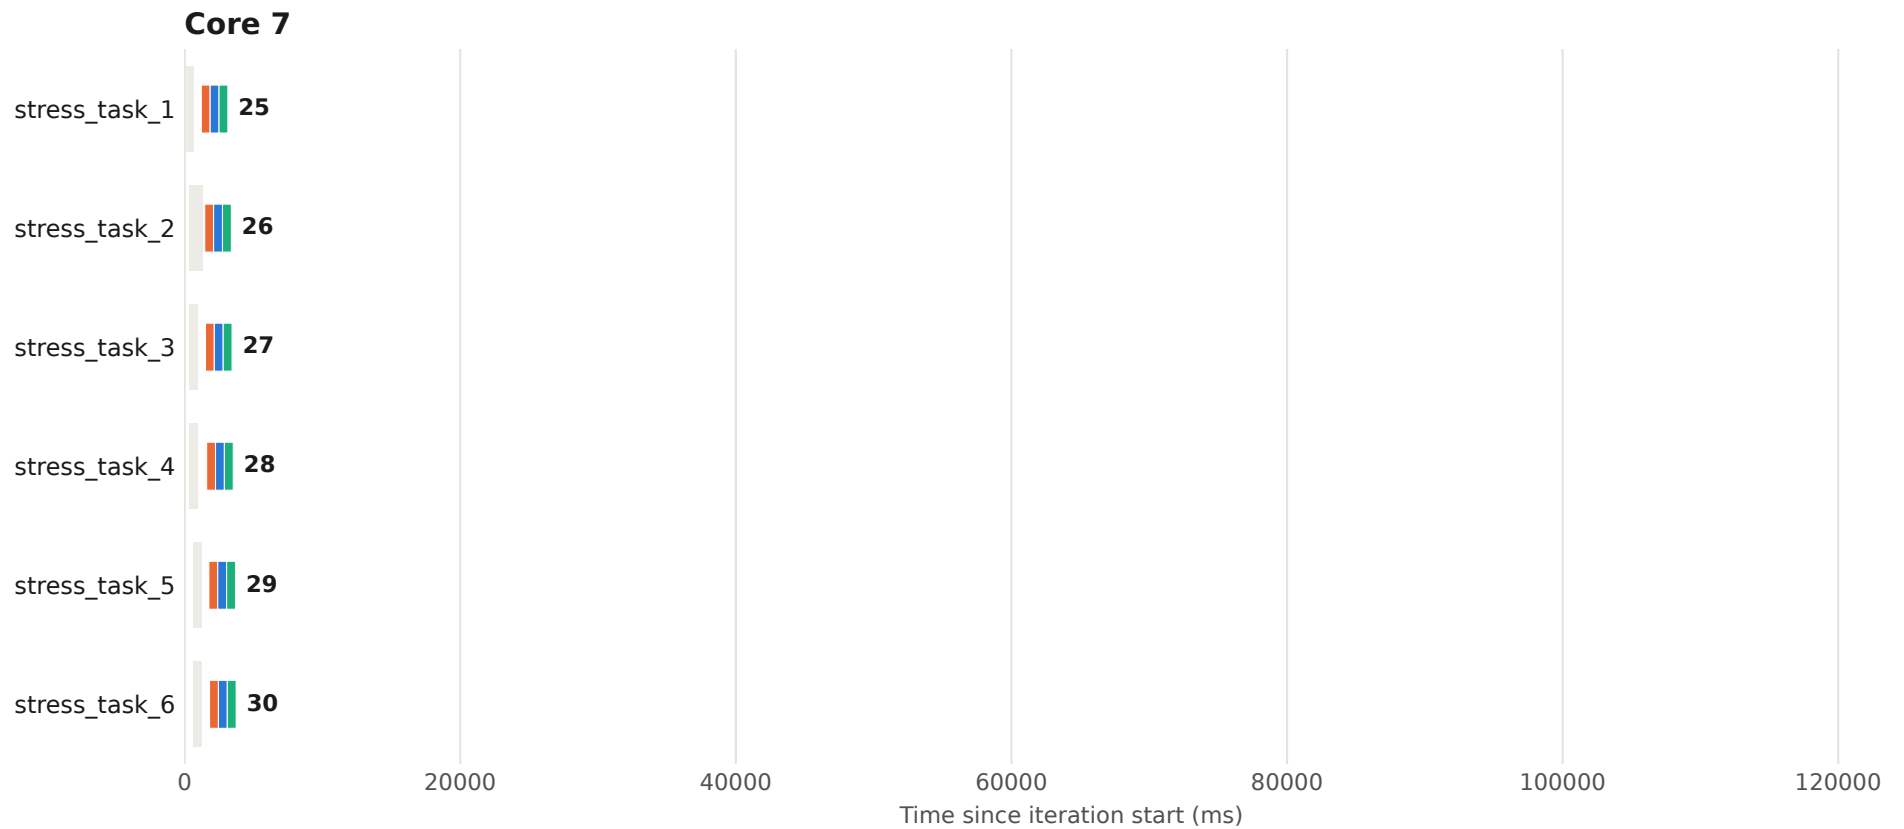


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 34 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

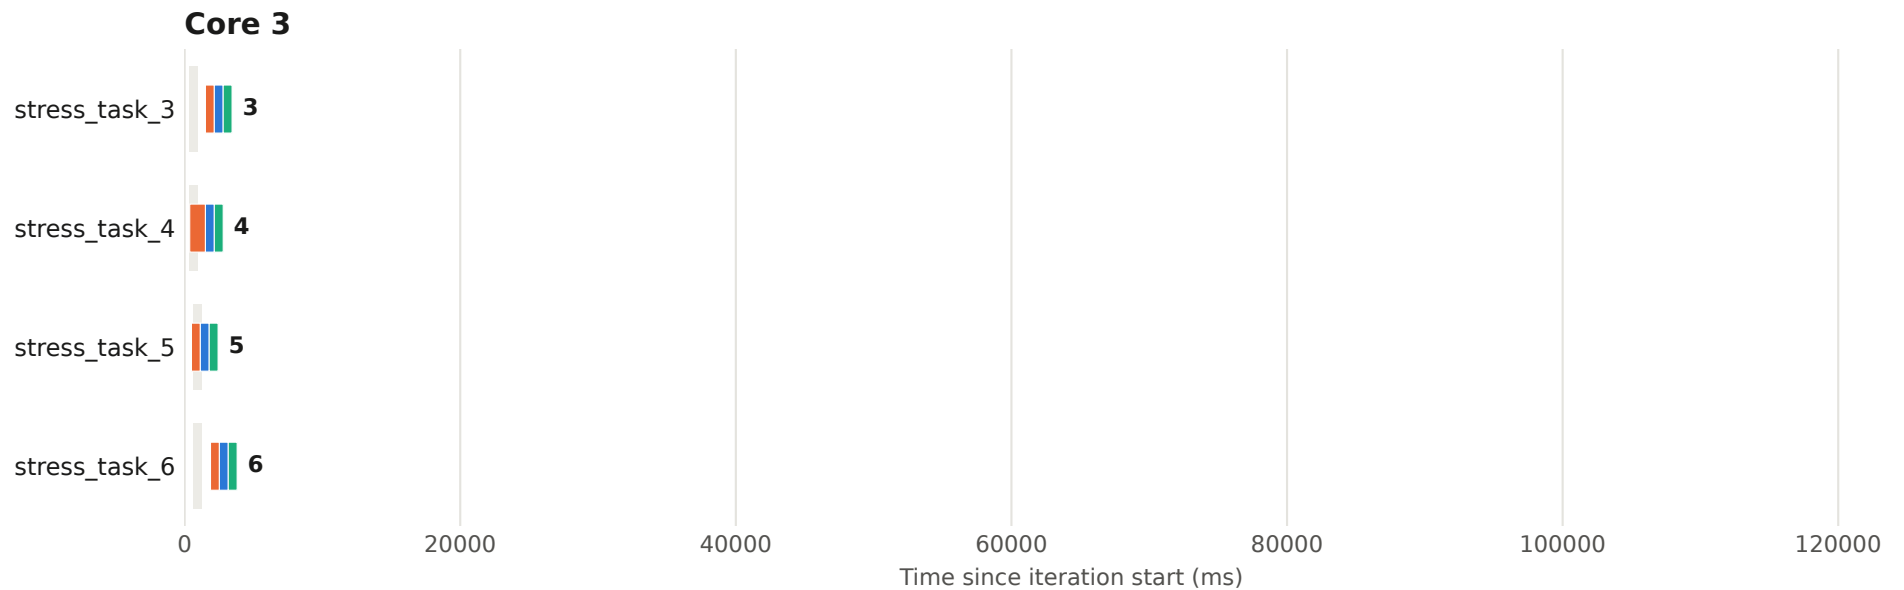

Execution plan - iteration 34 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

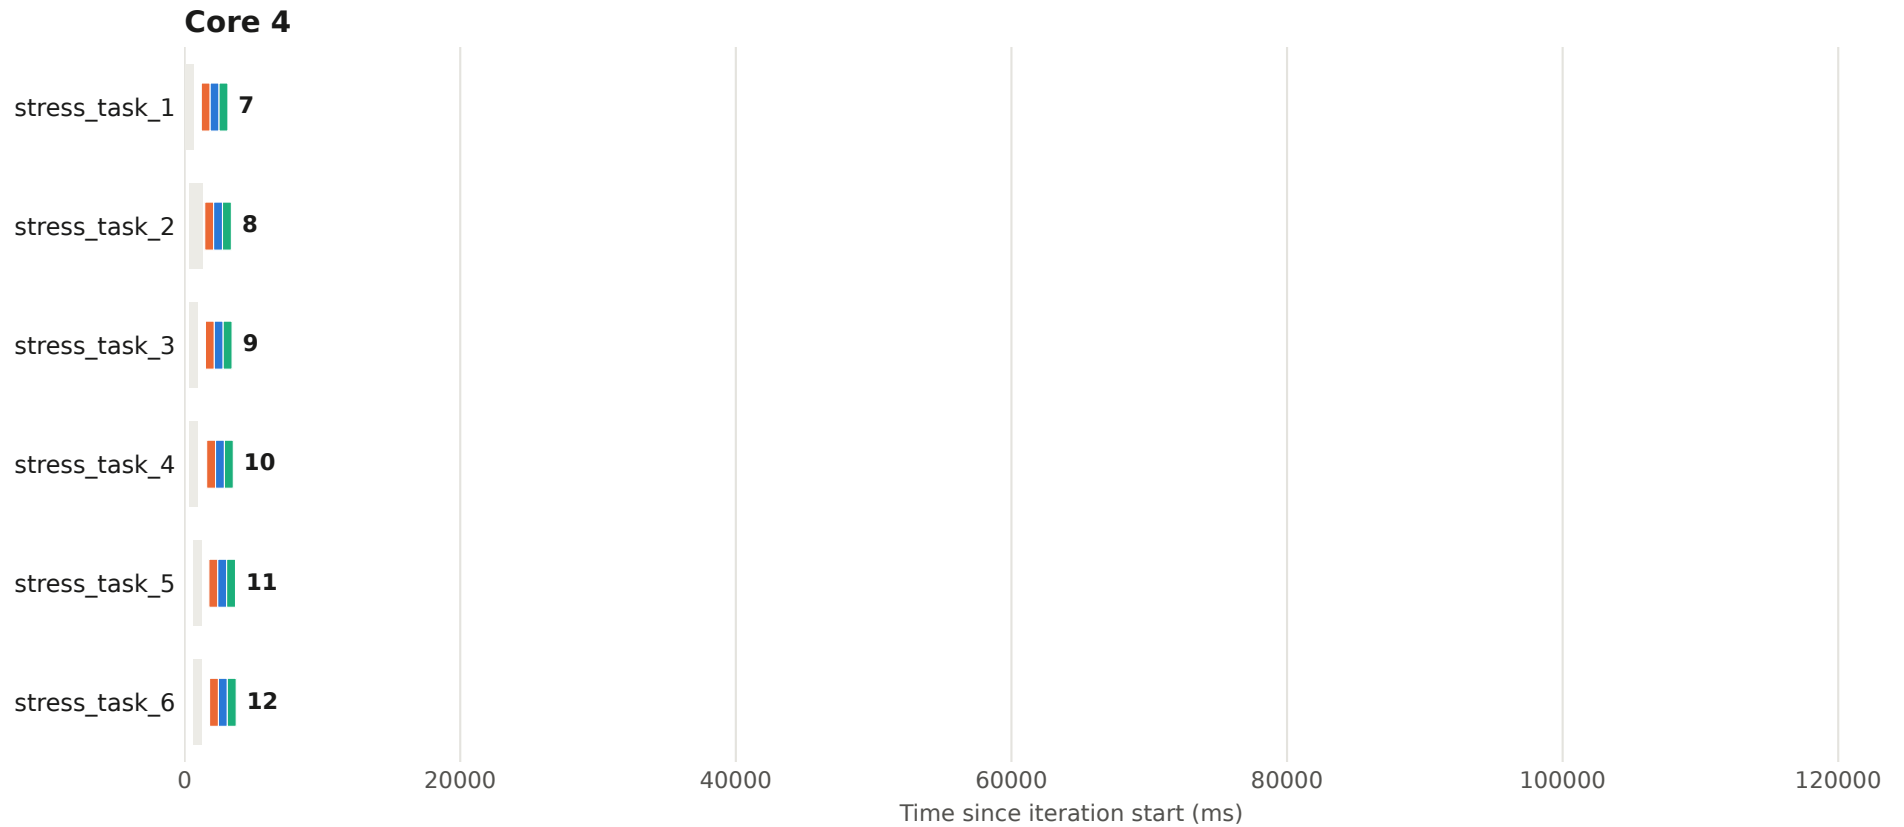


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 34 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

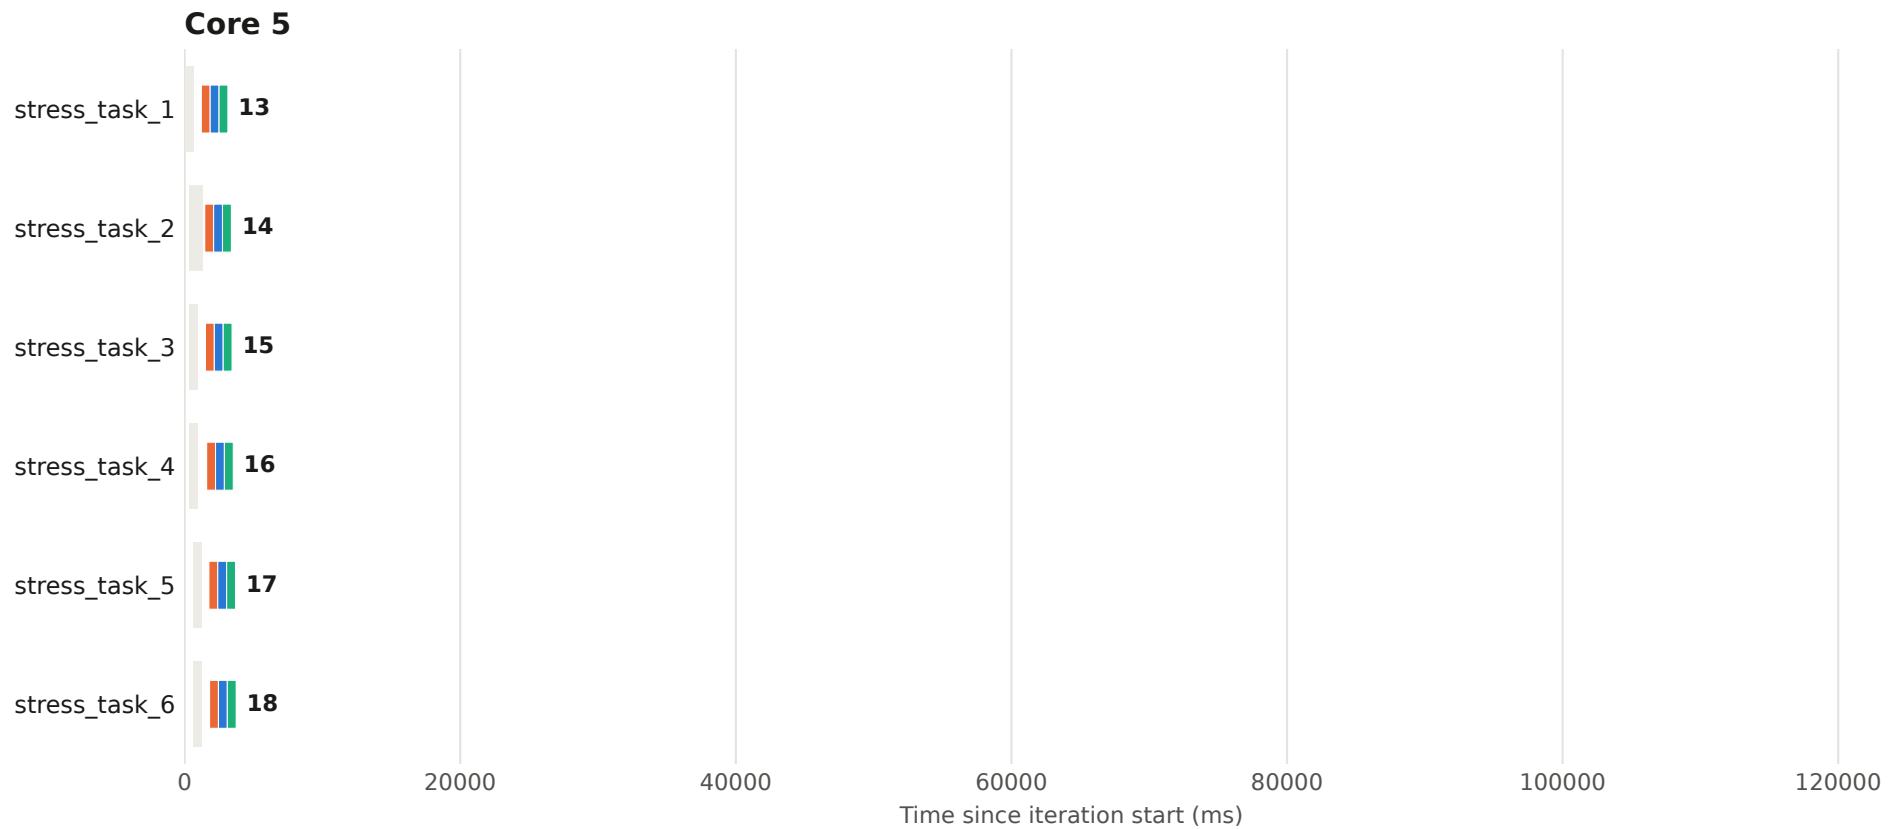


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 34 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

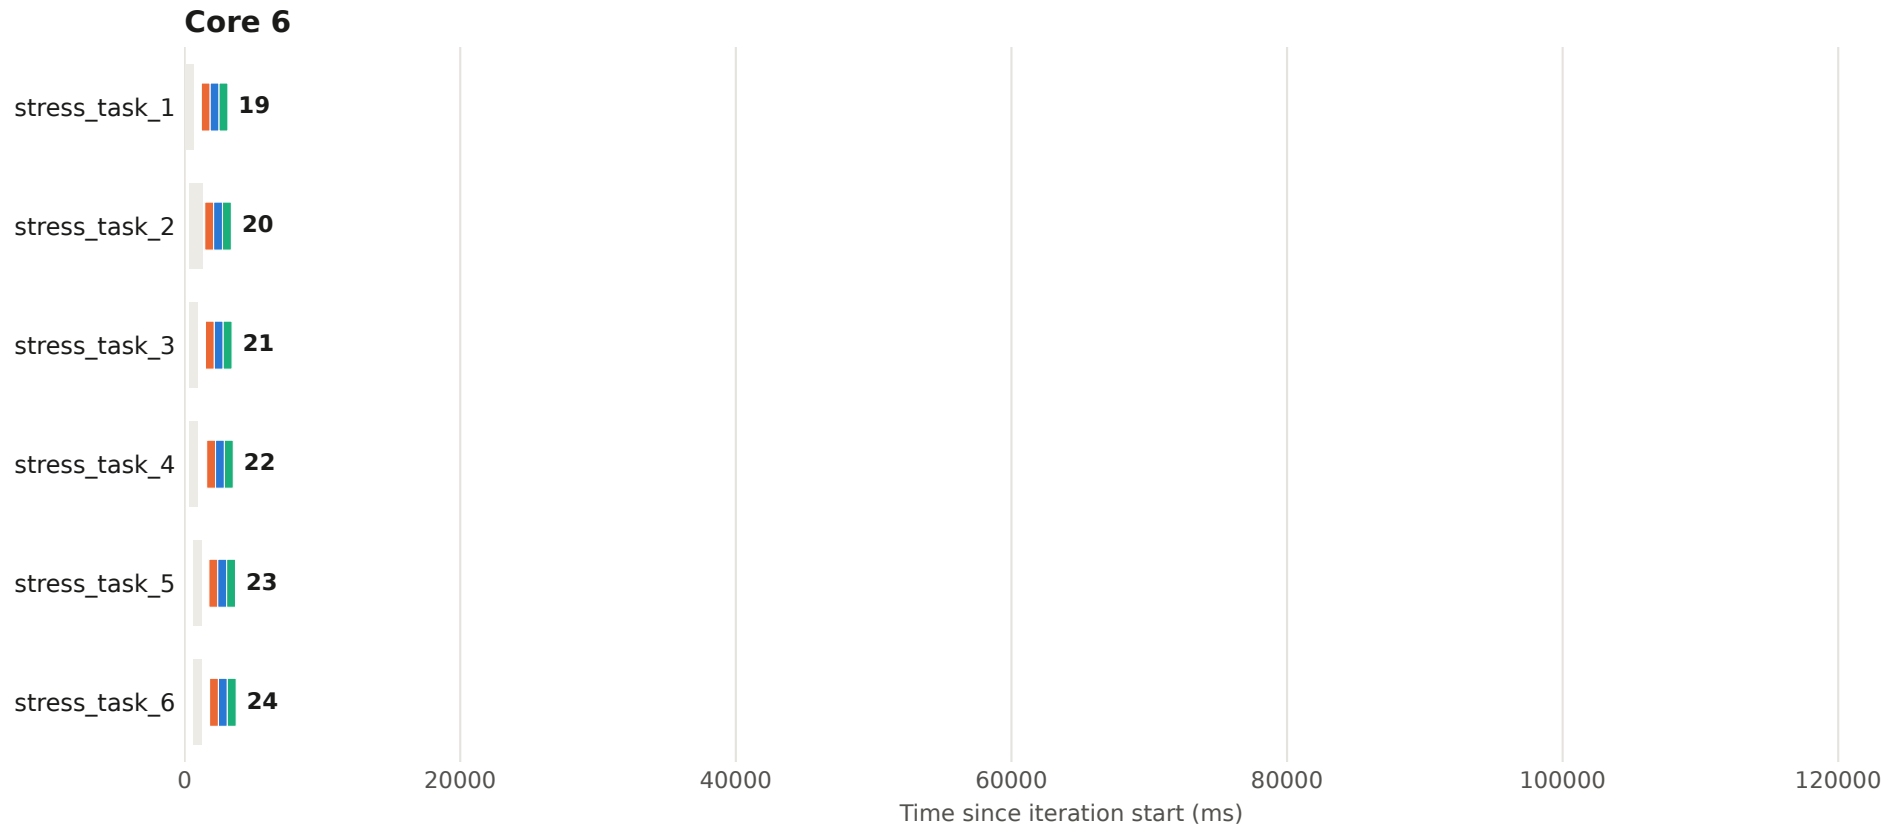


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 34 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

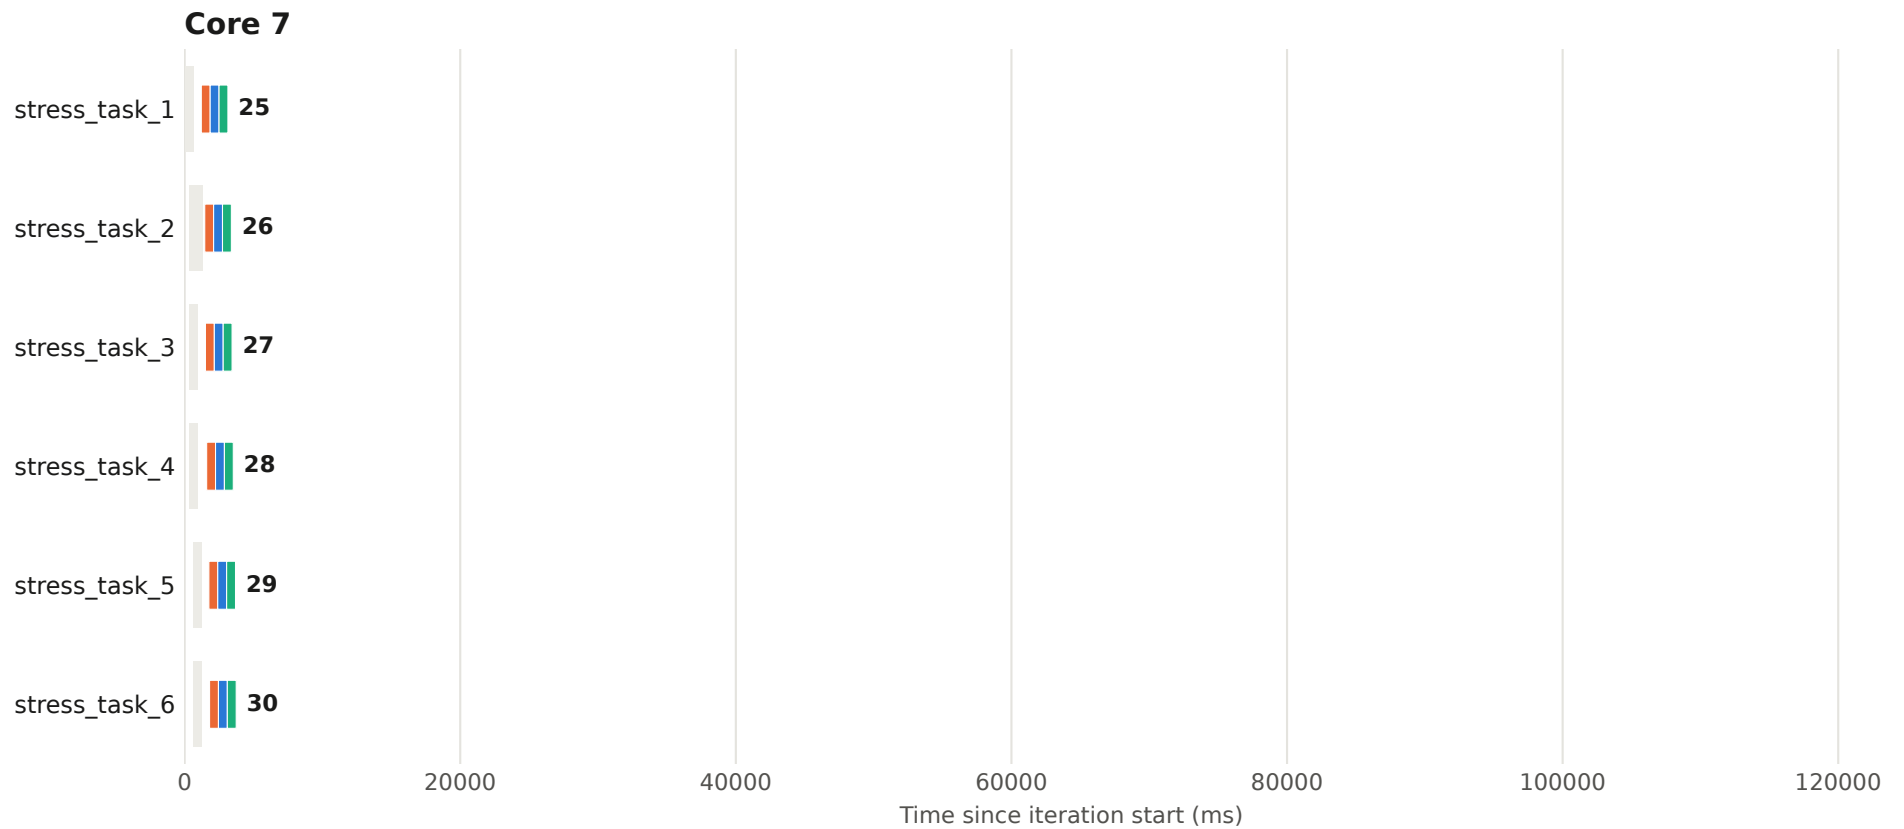


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 35 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

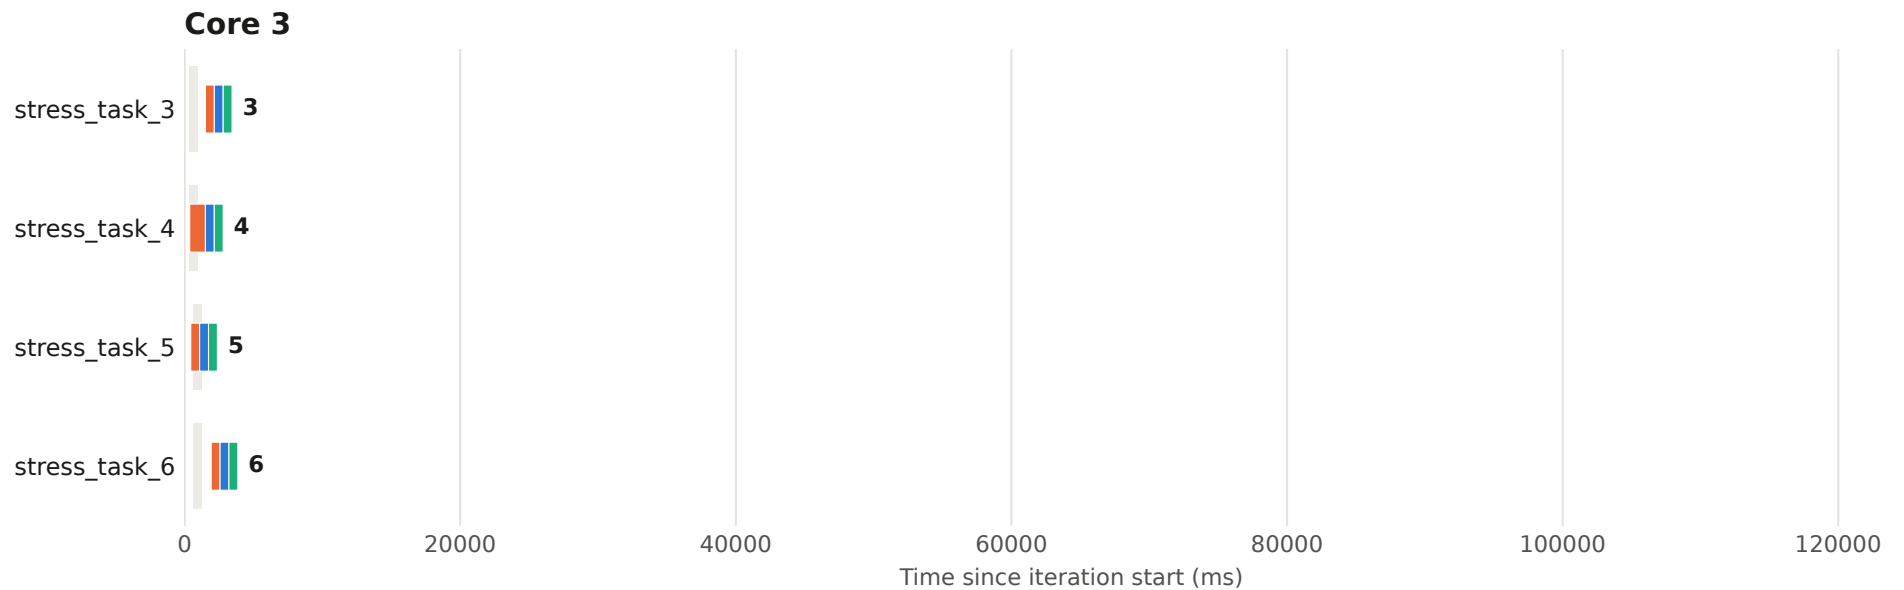

Execution plan - iteration 35 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

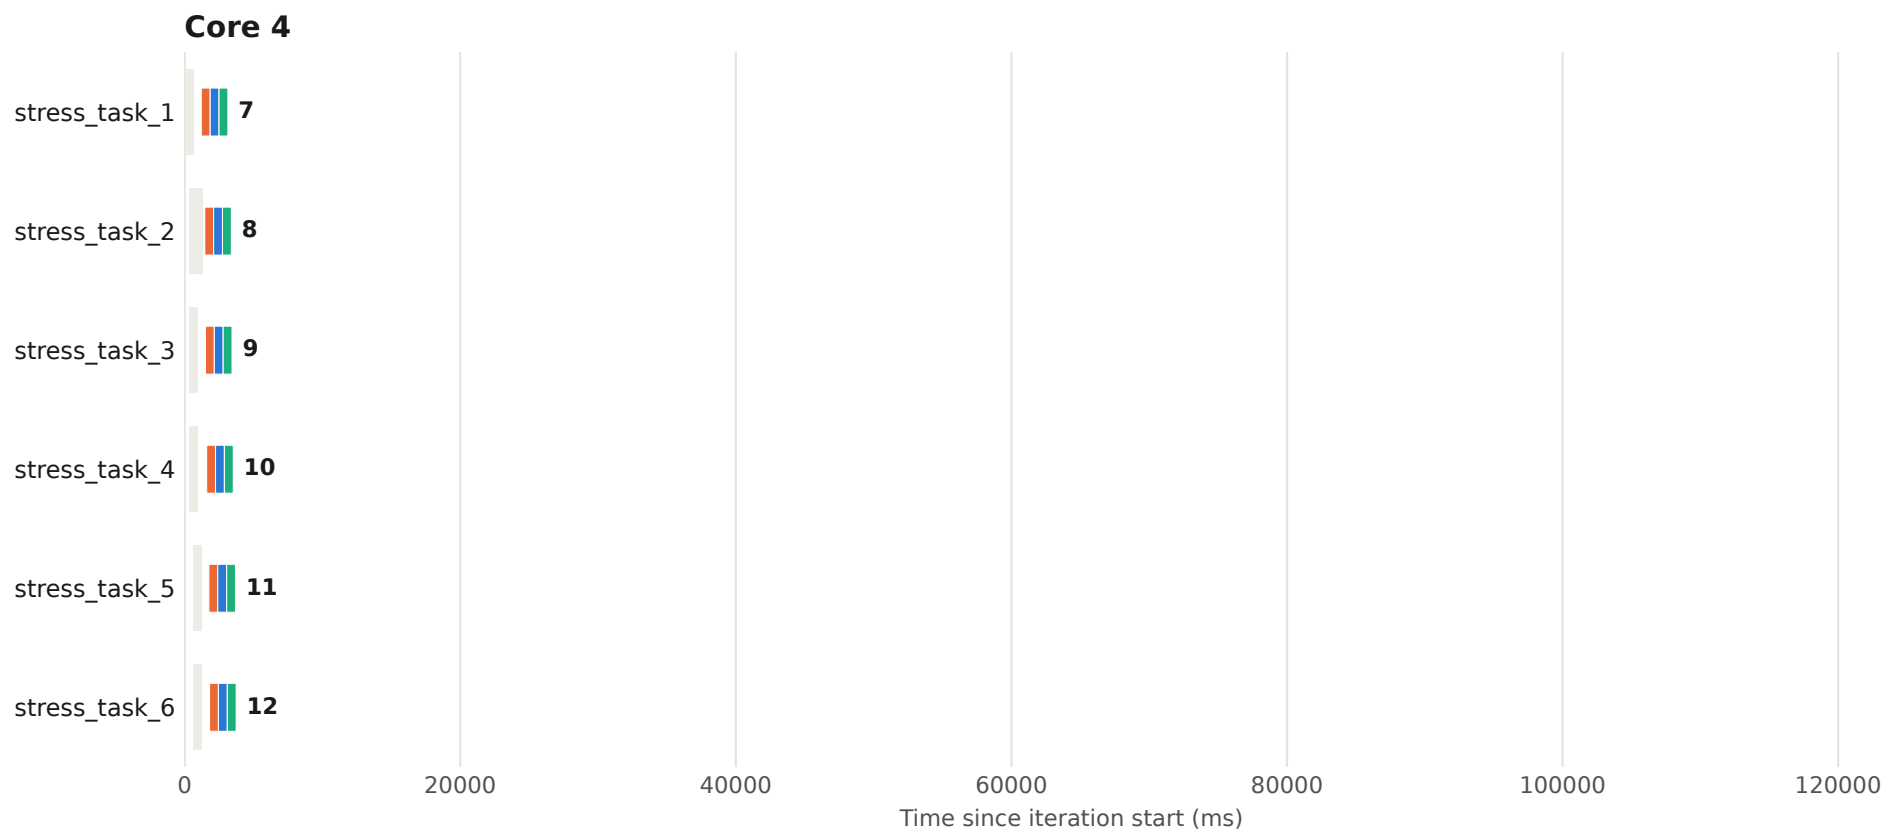


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 35 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

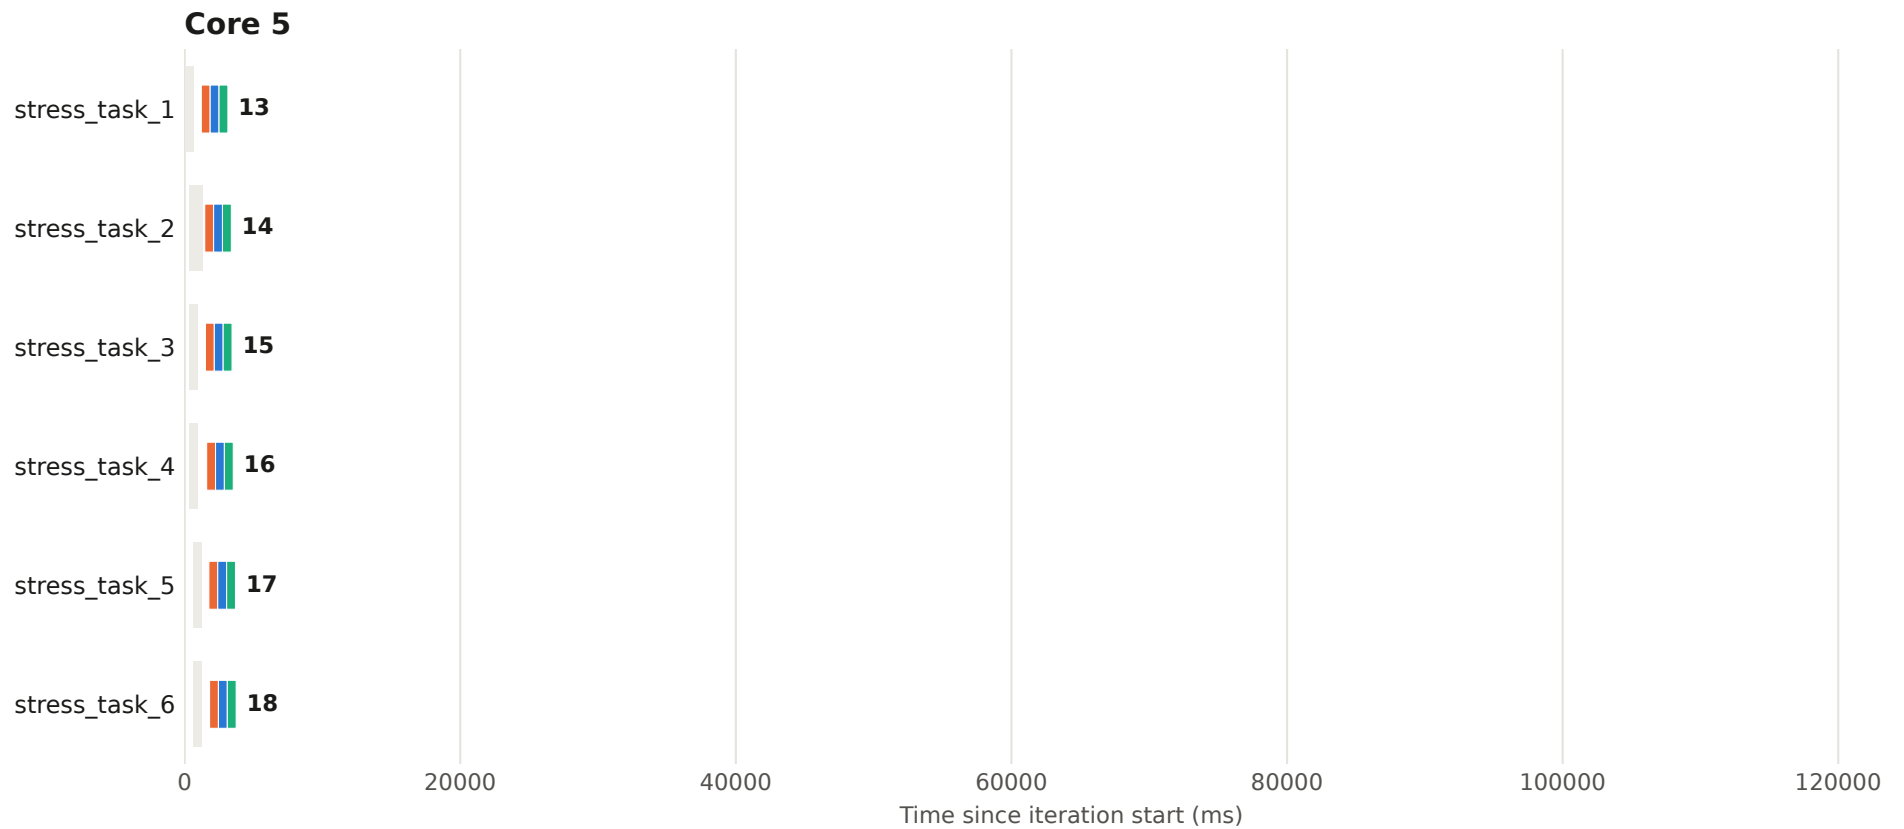


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 35 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

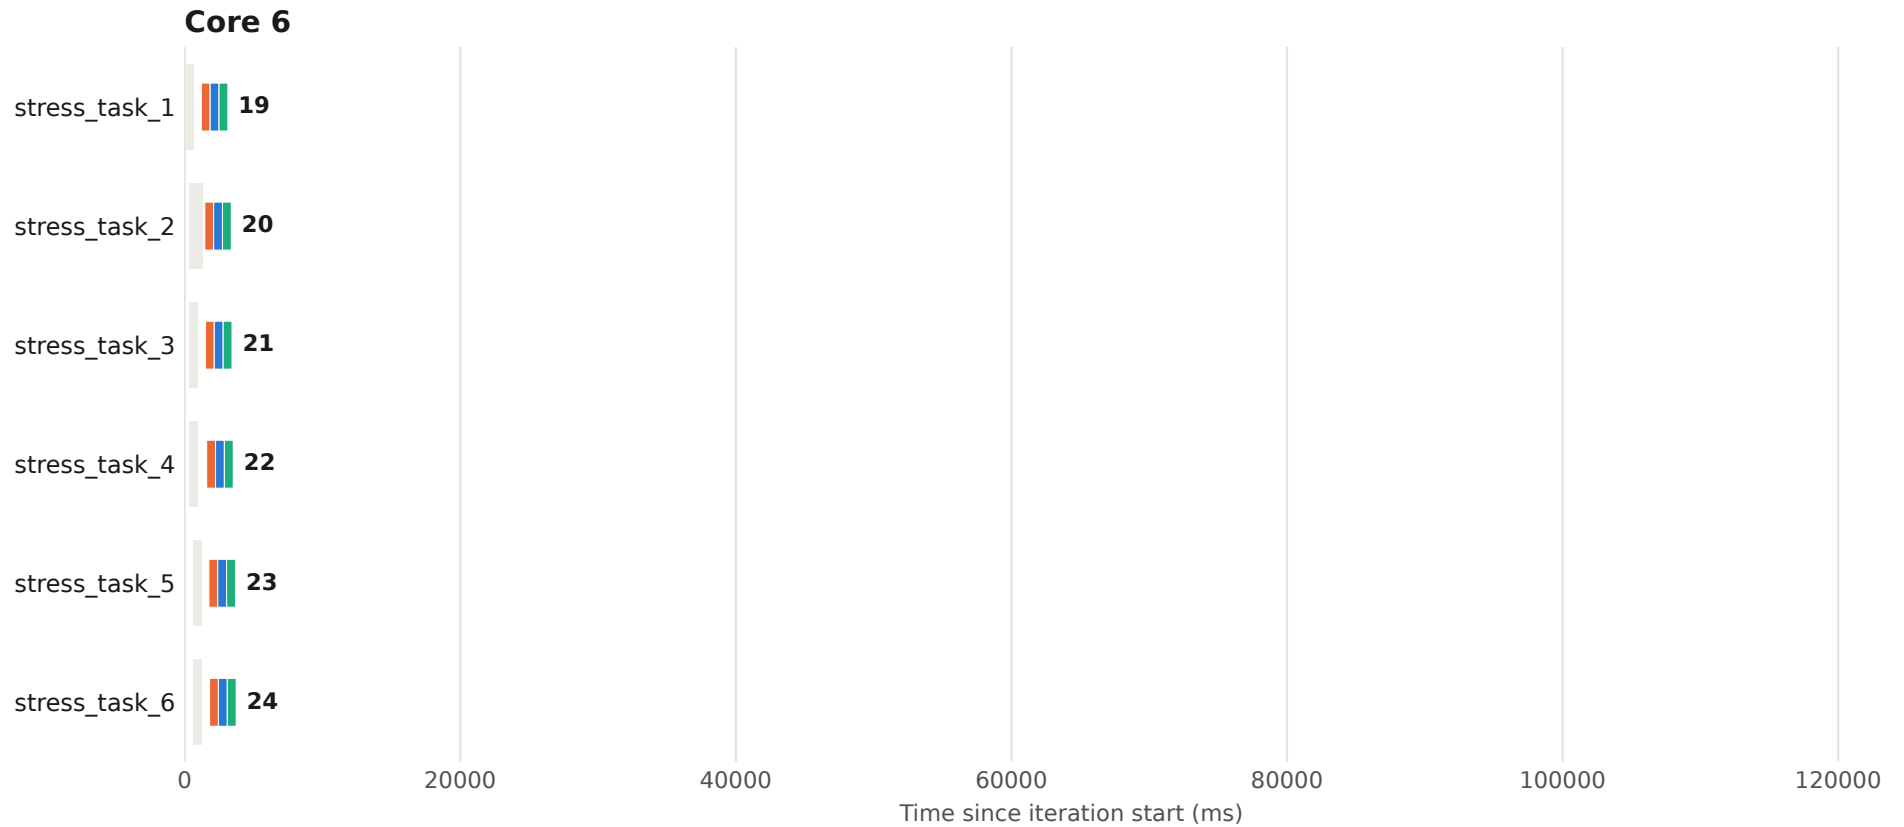


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 35 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

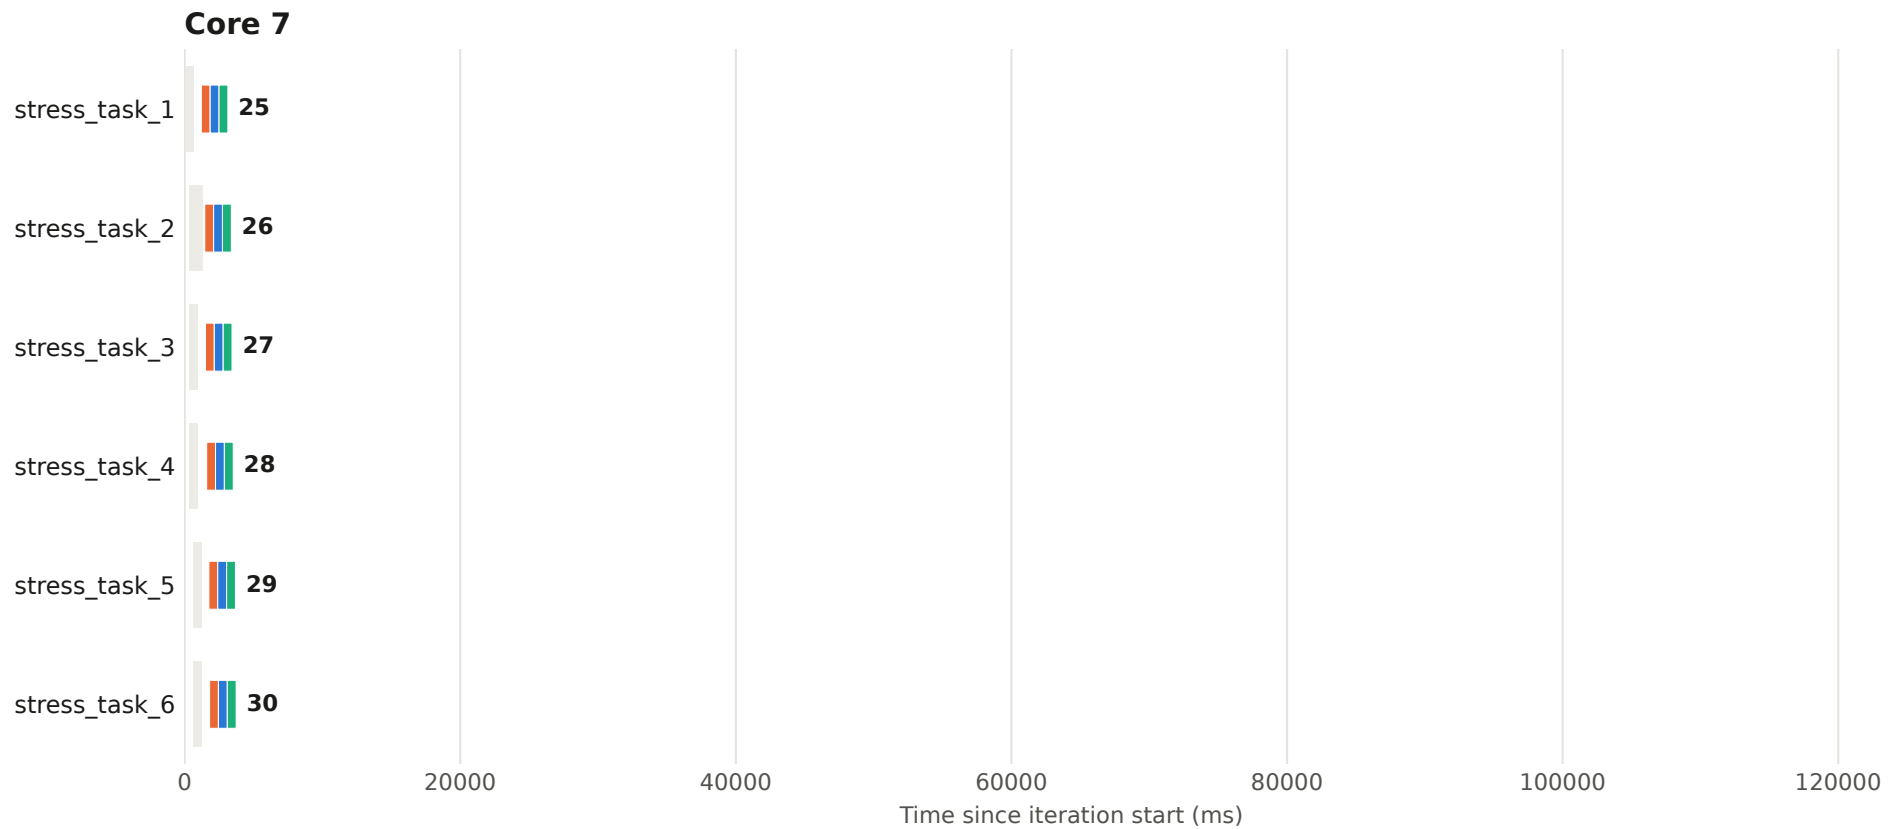


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 36 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

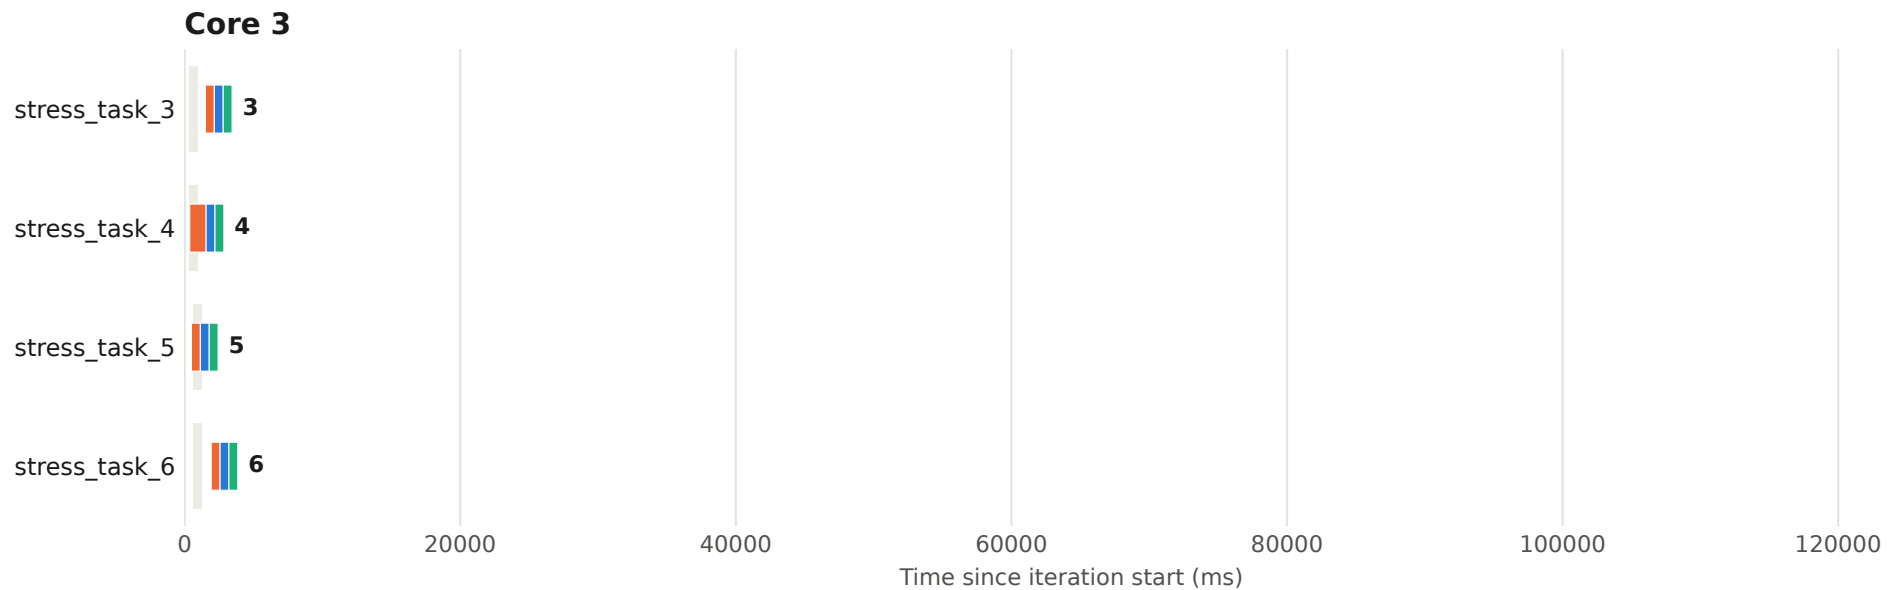


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 36 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

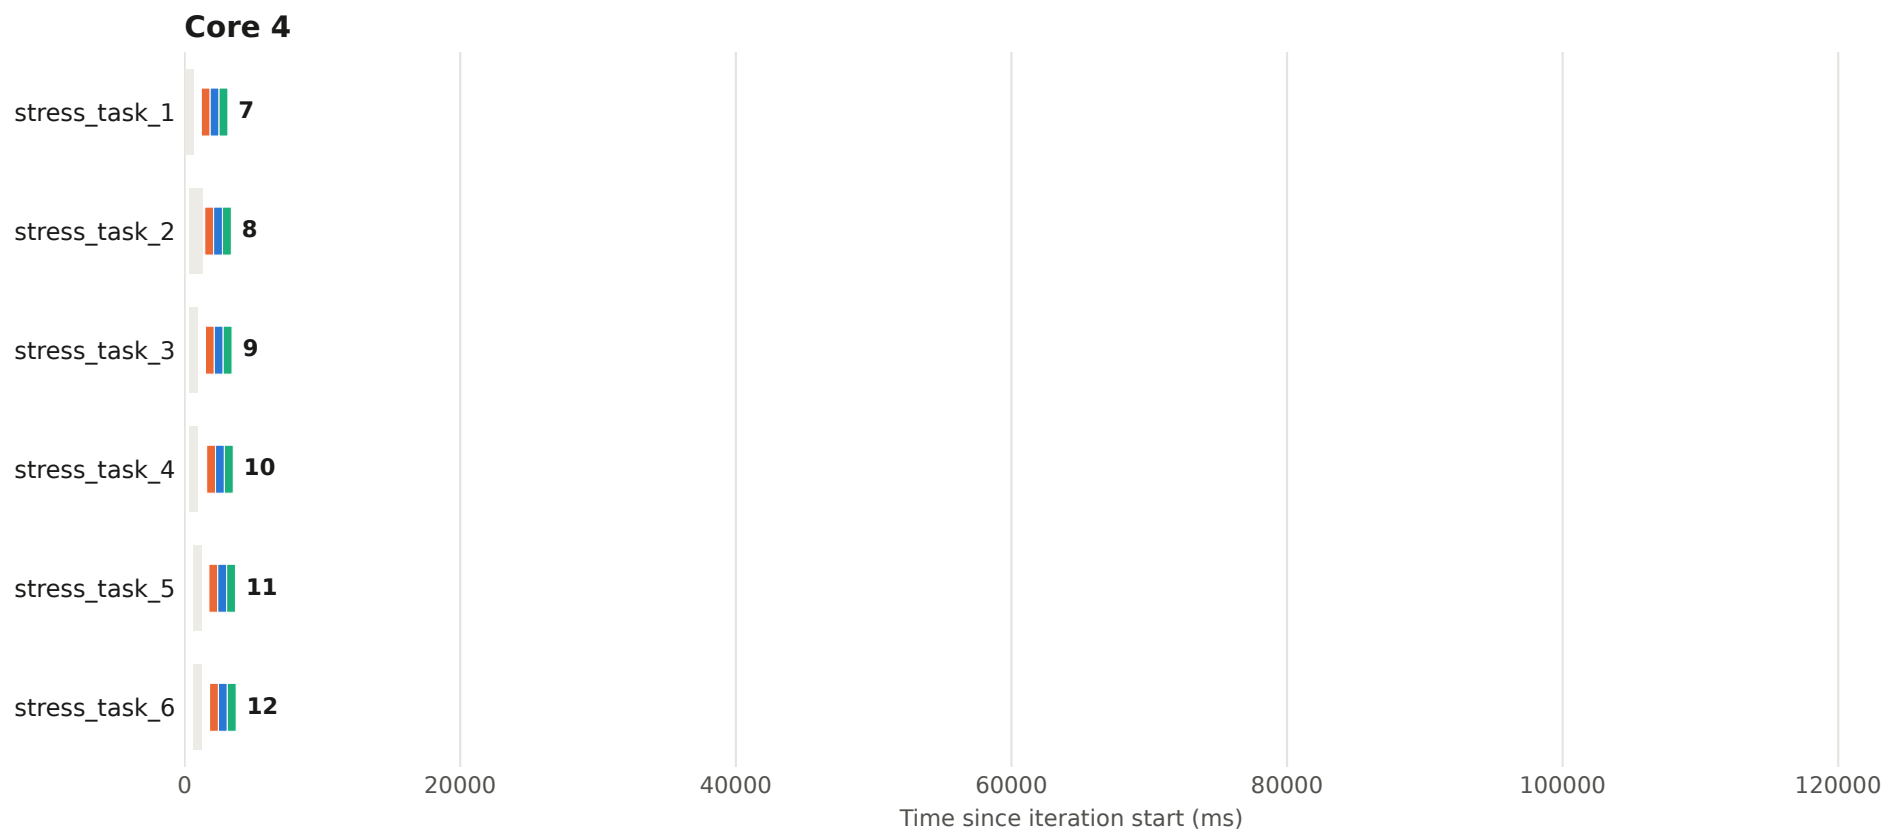


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 36 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

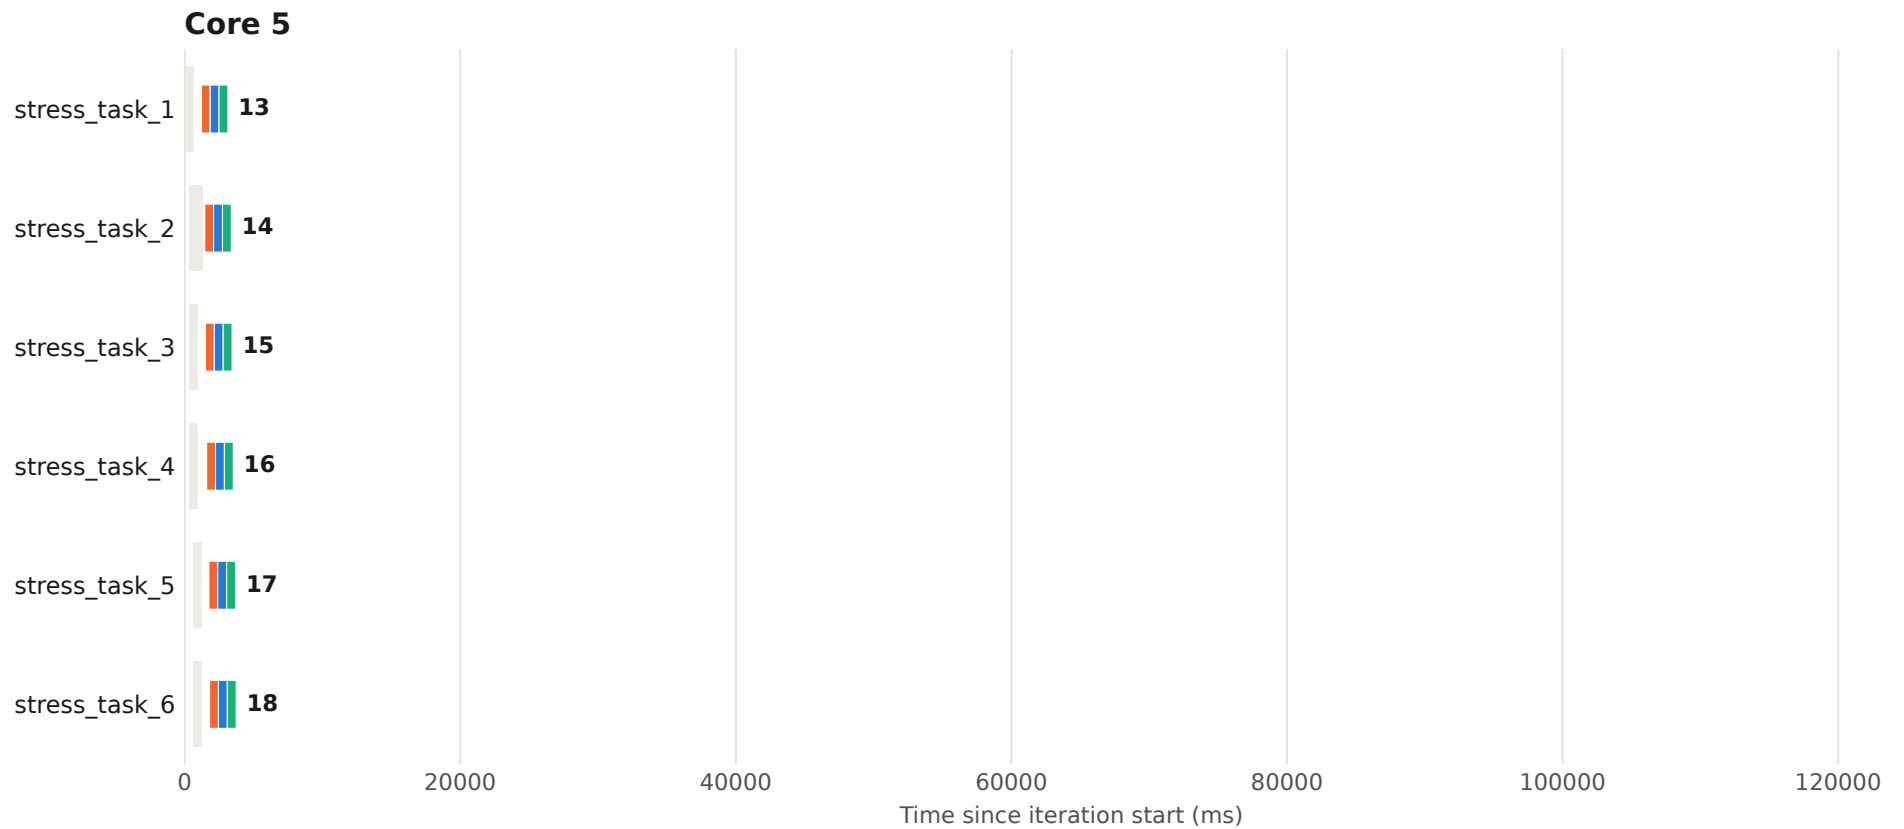


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 36 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

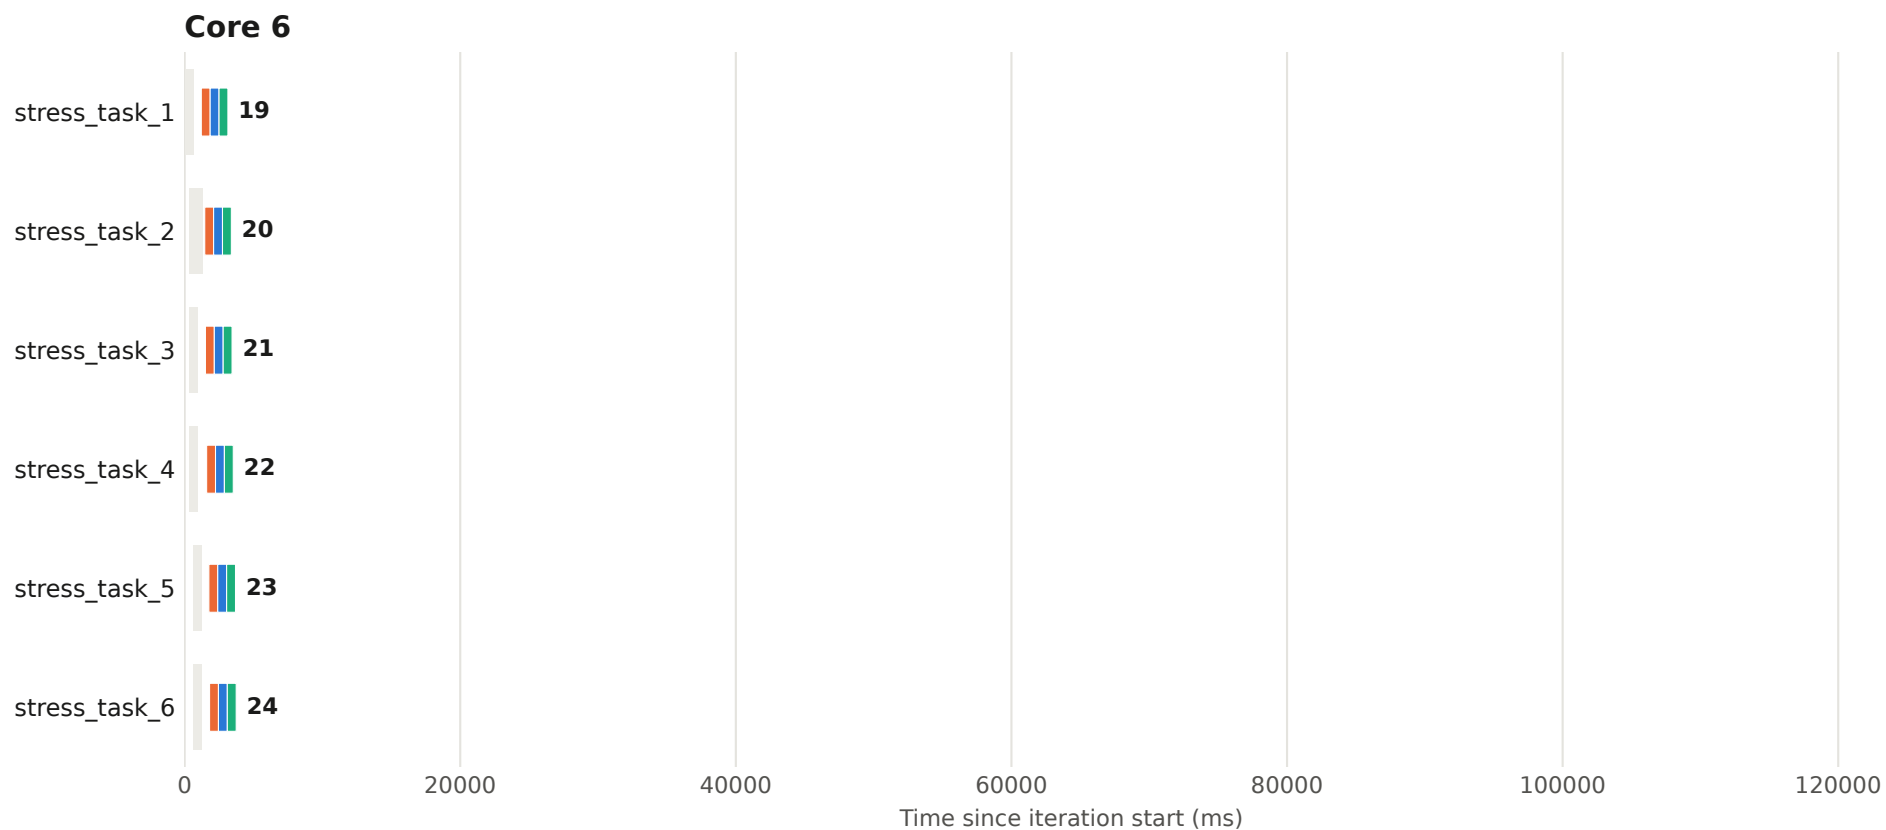


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 36 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

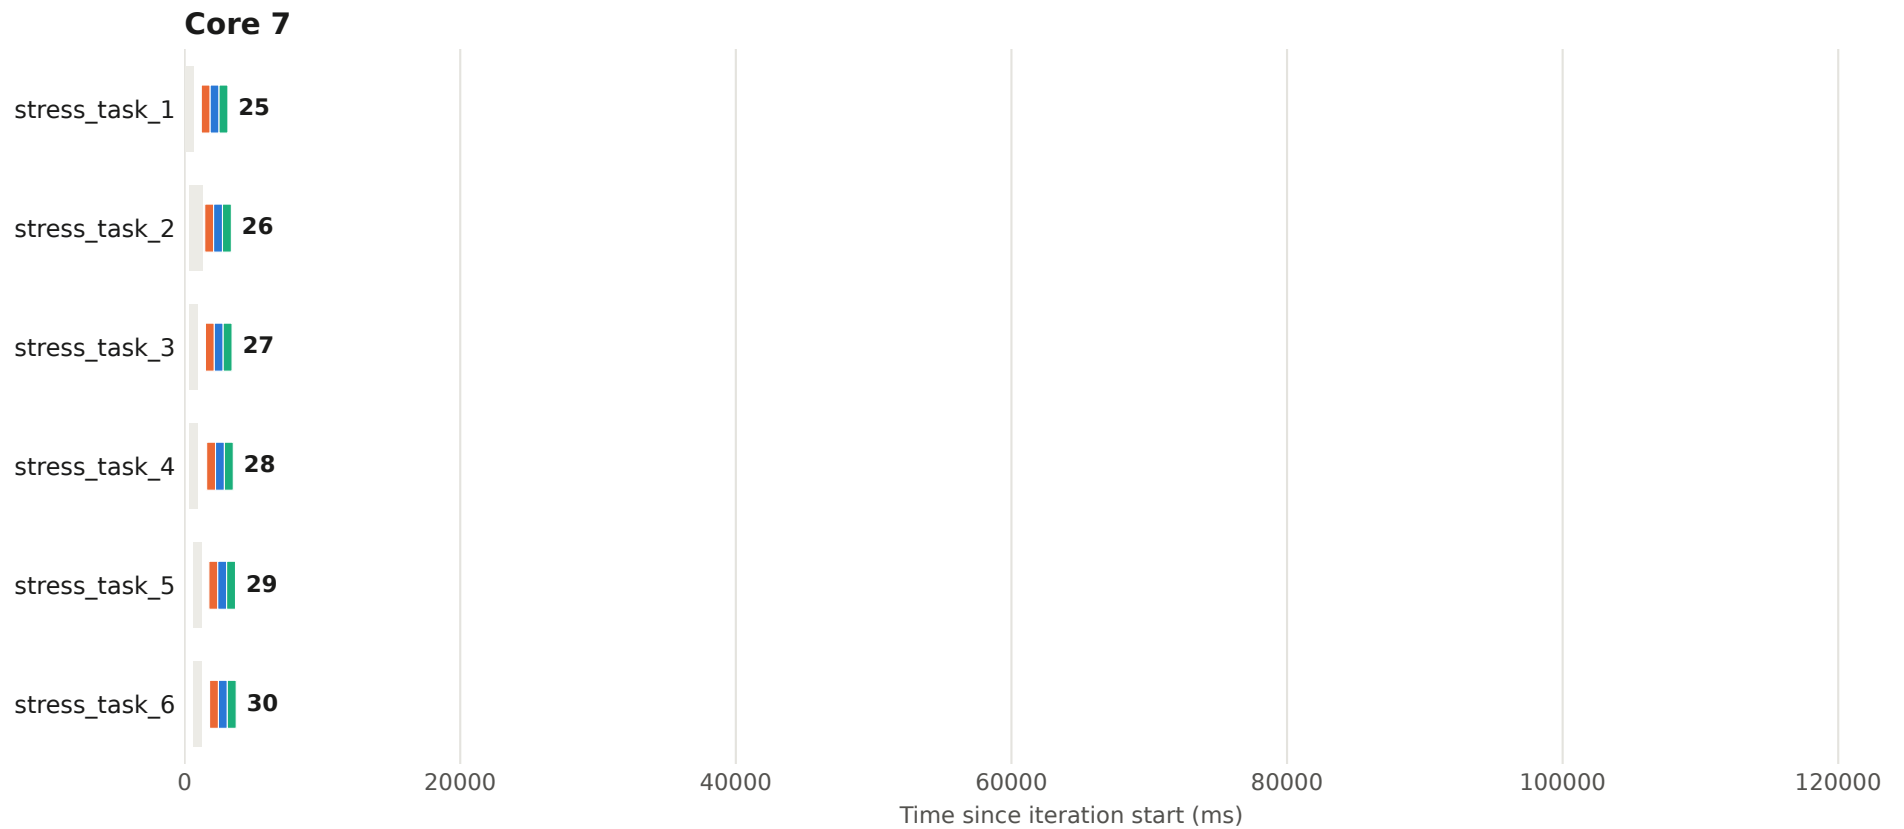


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 37 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

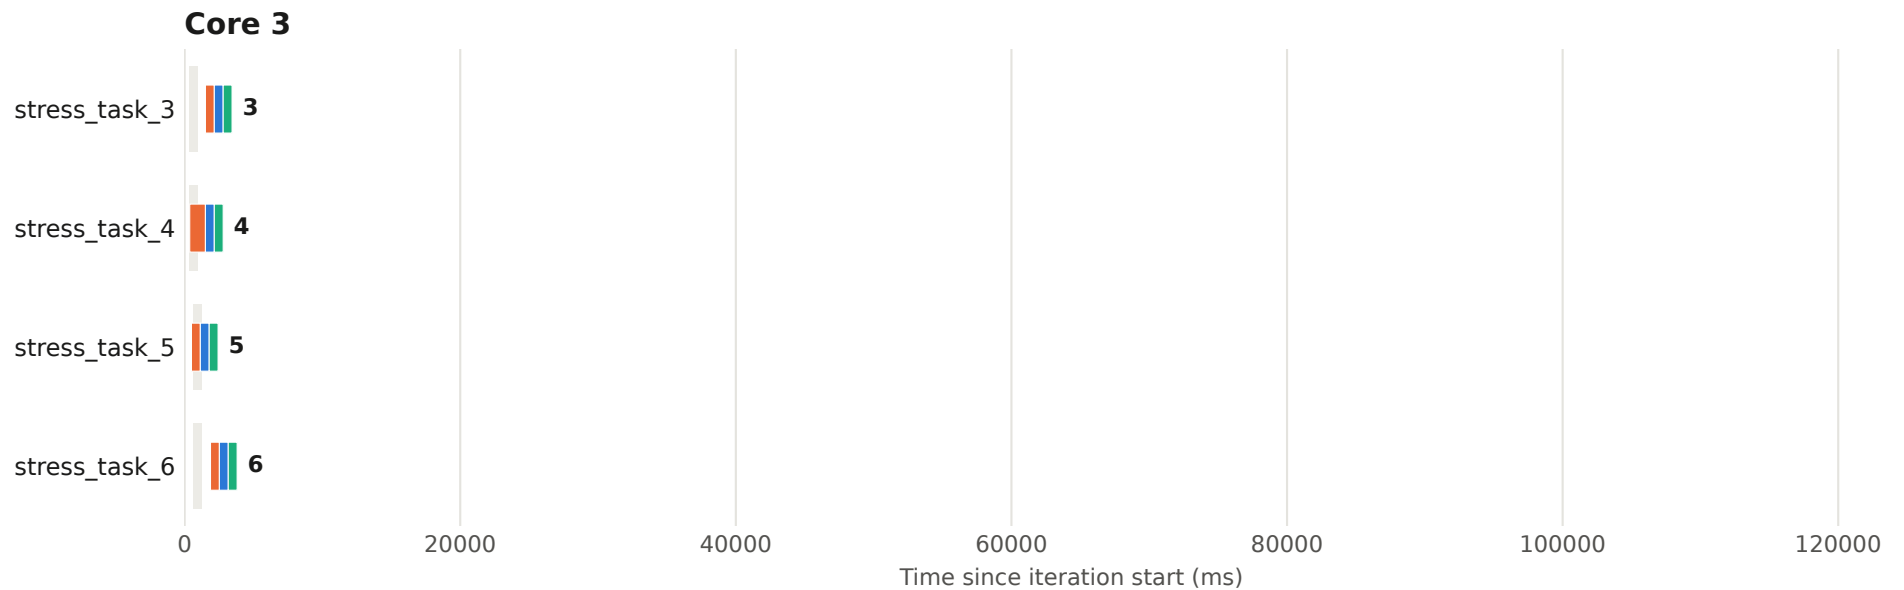


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 37 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

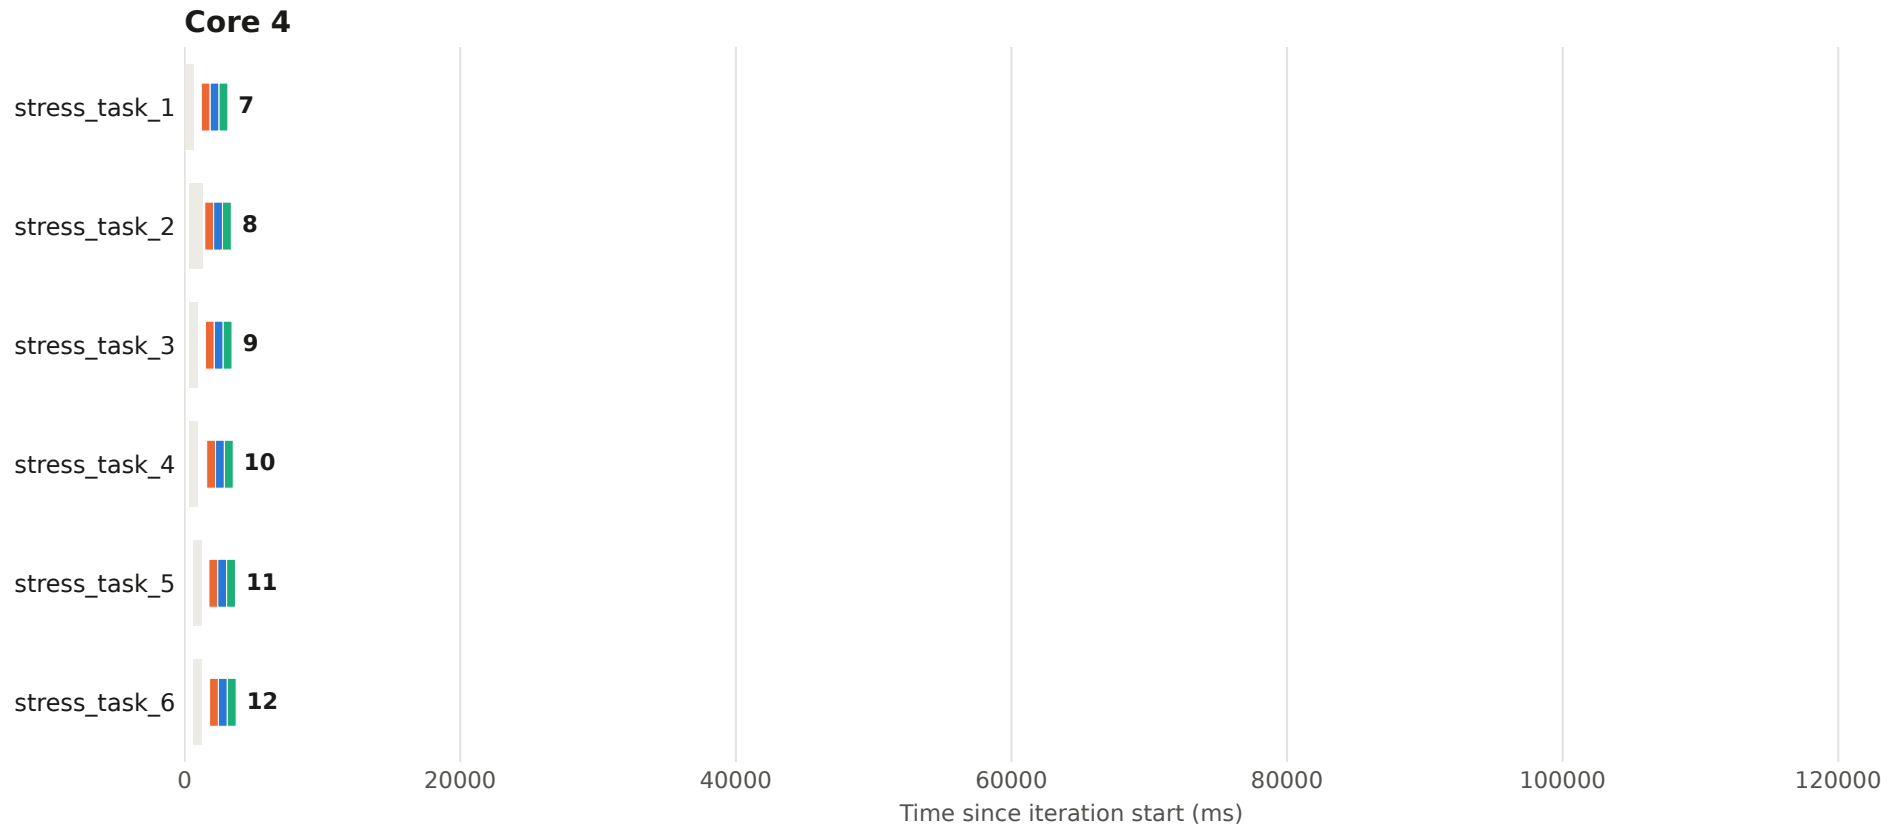


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 37 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

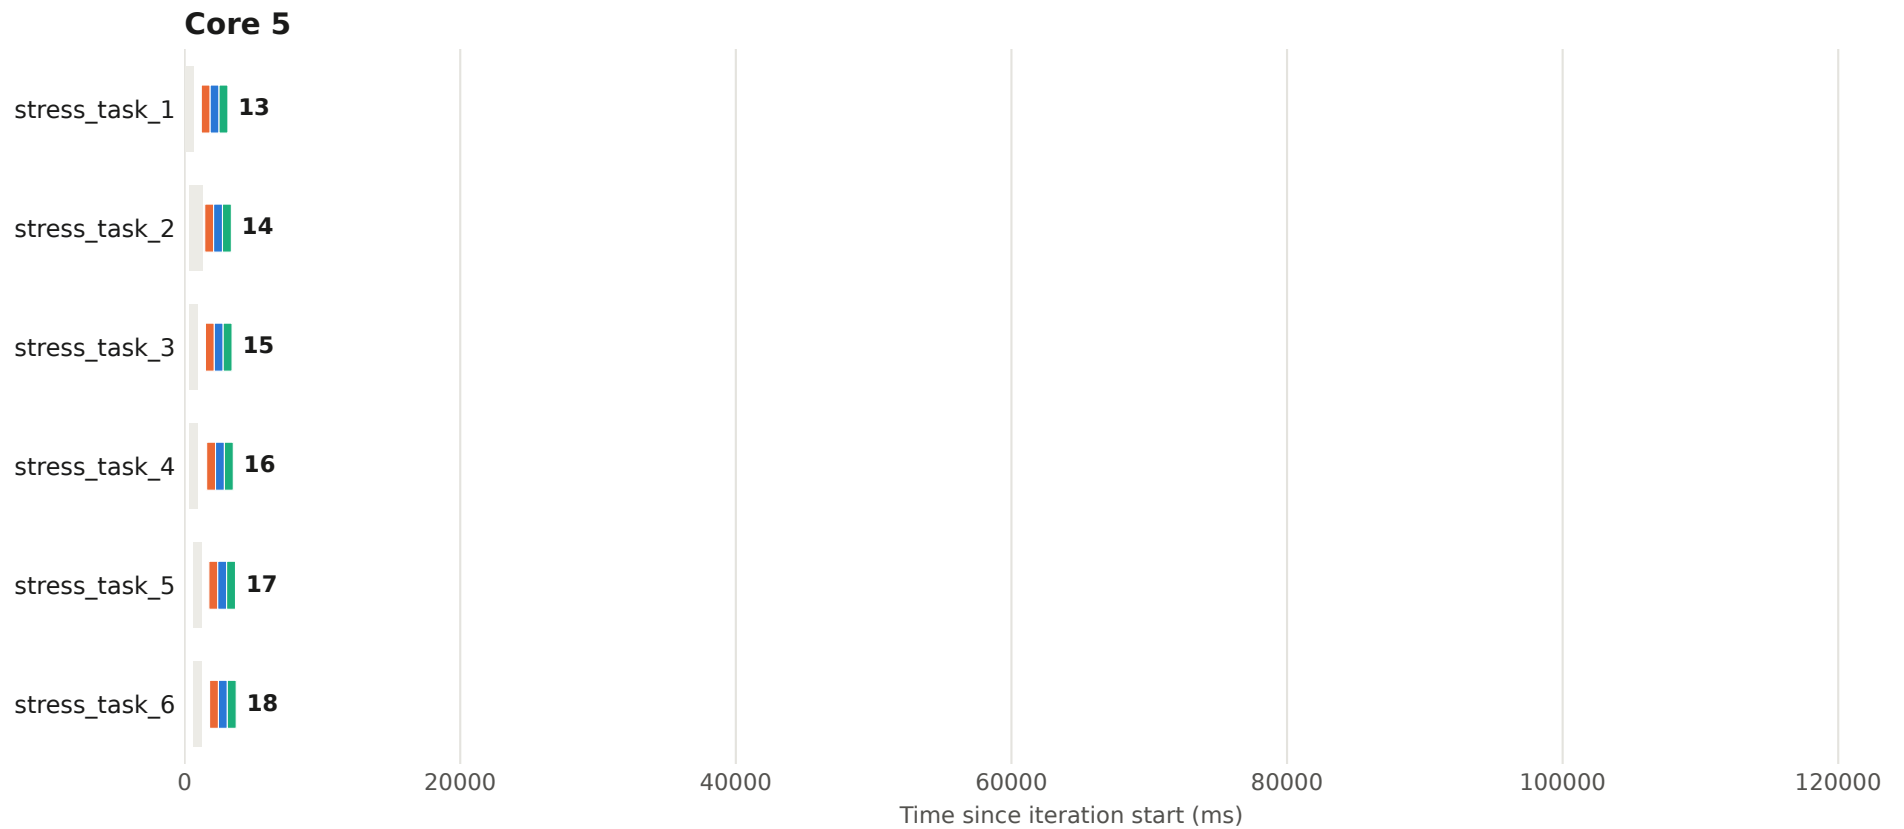


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 37 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

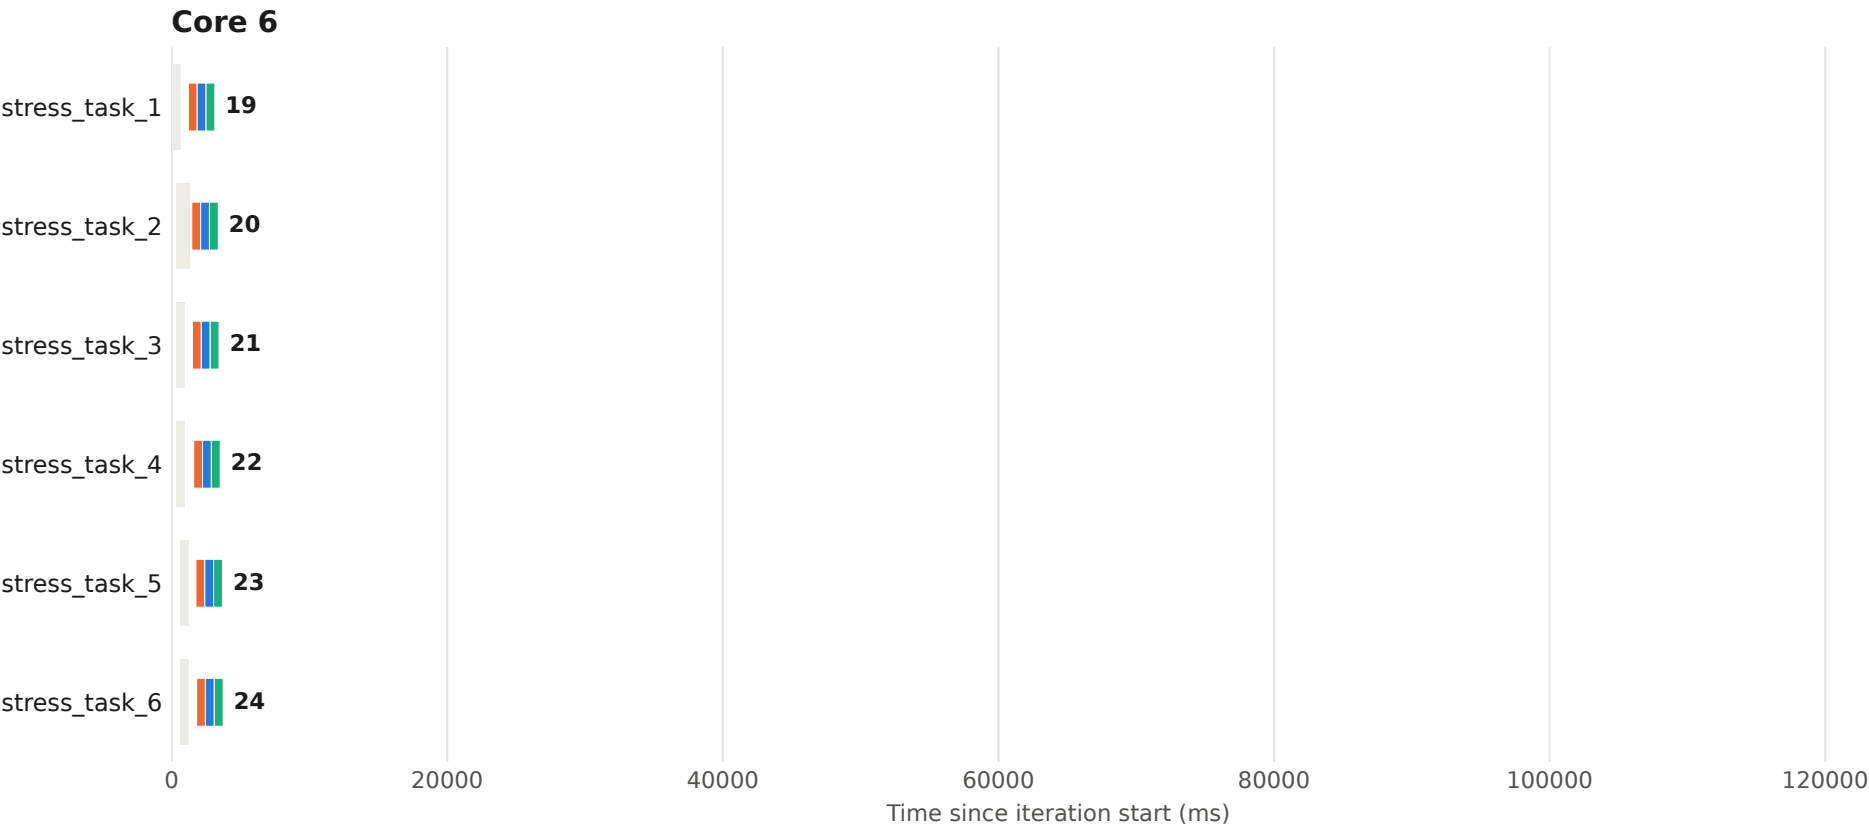


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 37 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

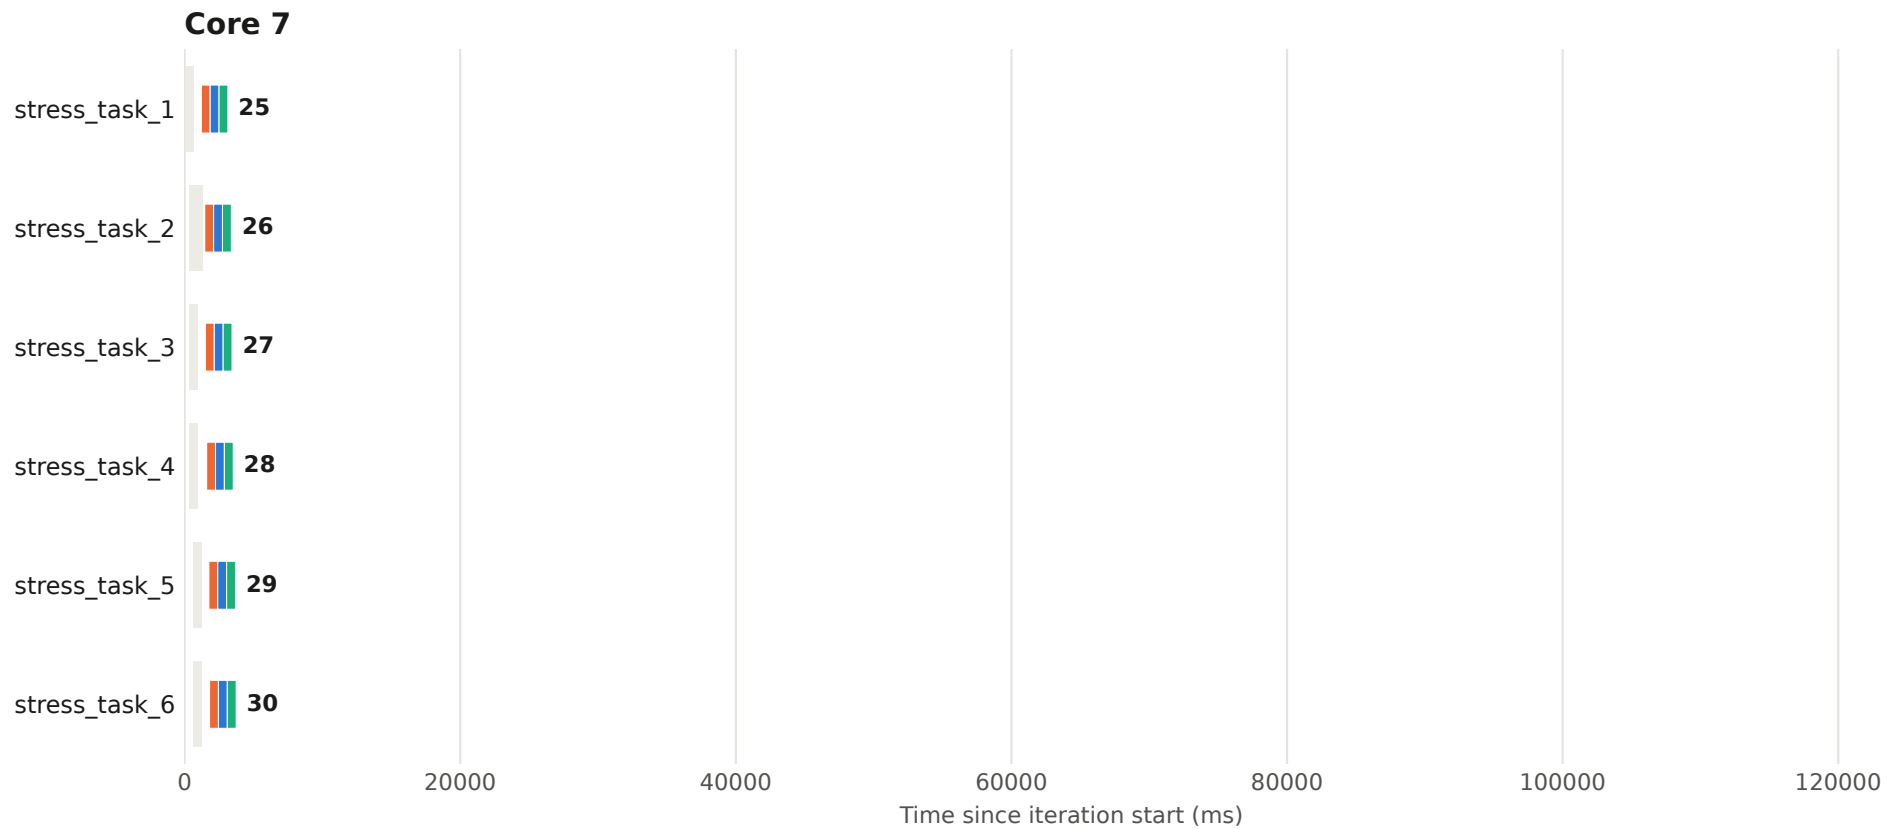


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 38 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

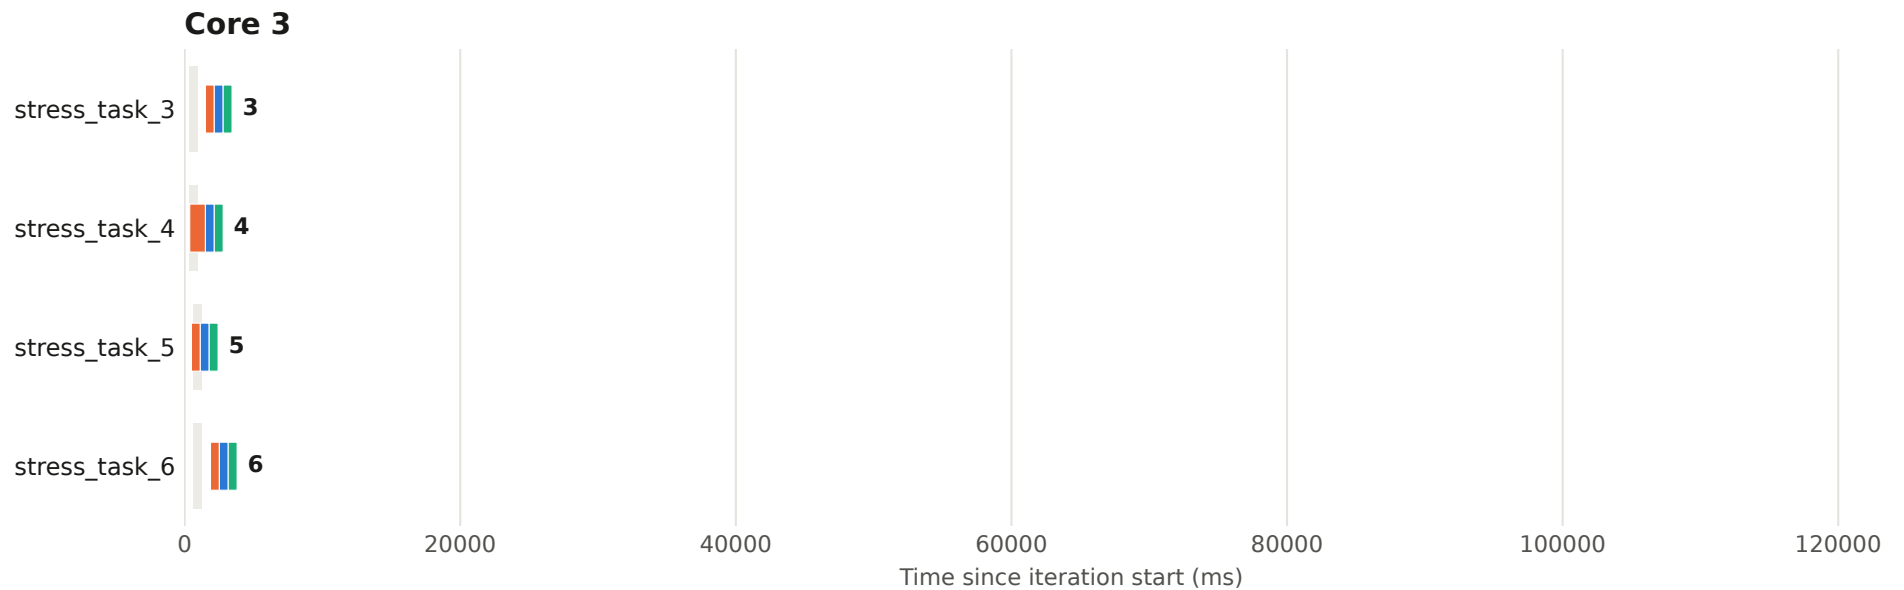

Execution plan - iteration 38 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

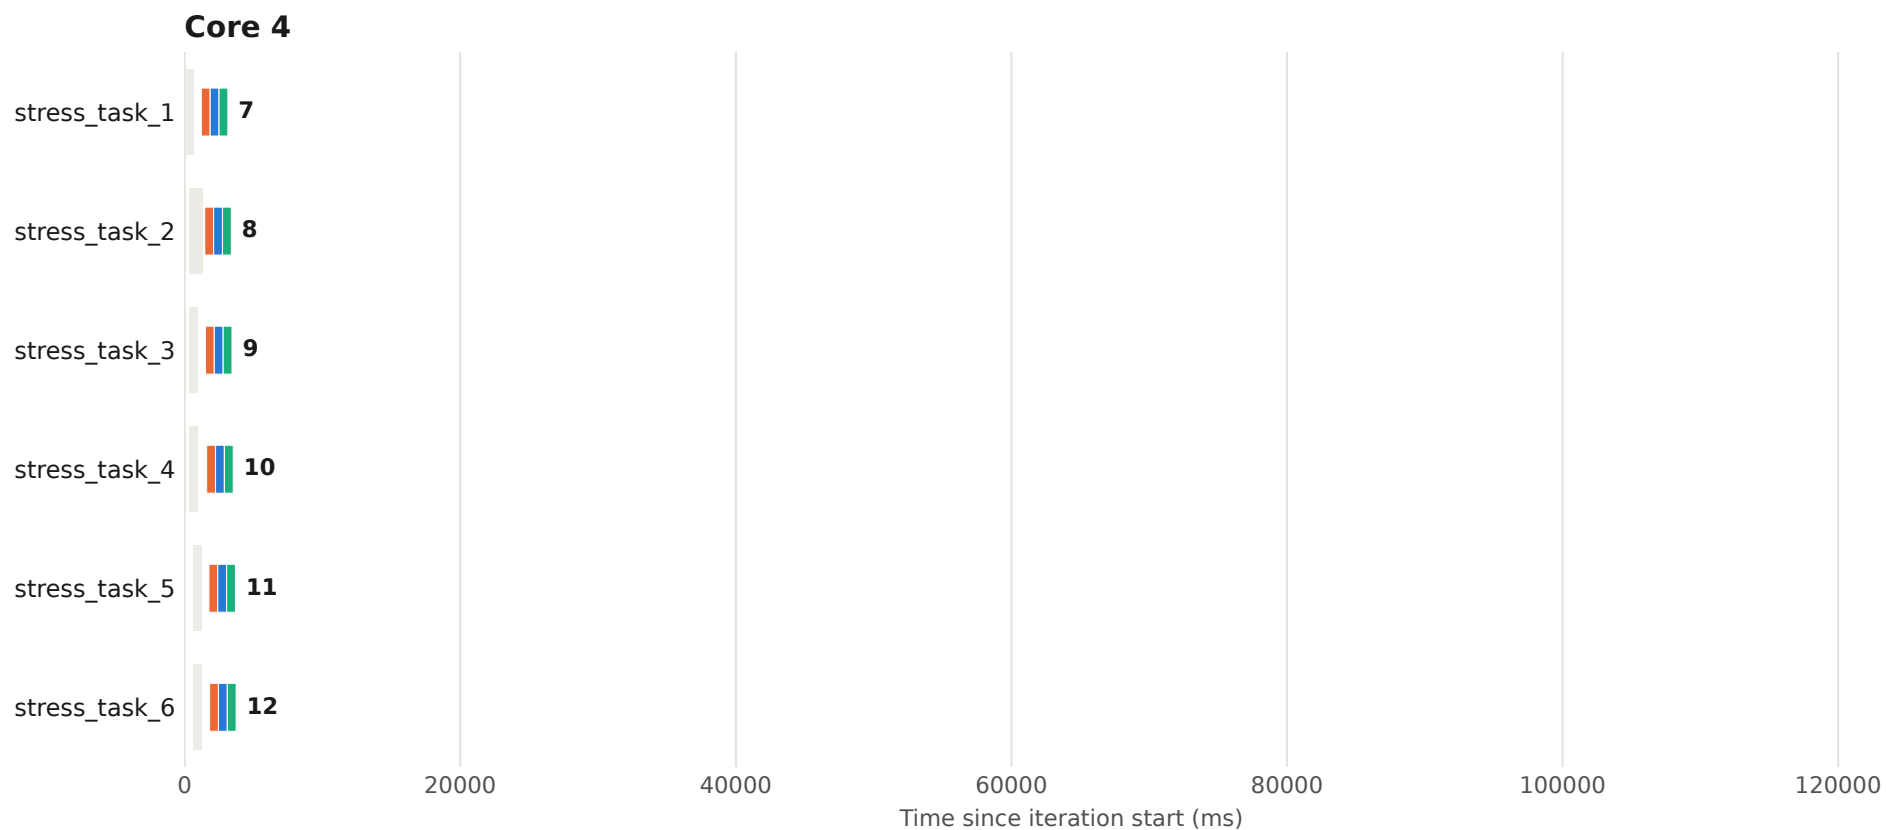


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 38 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

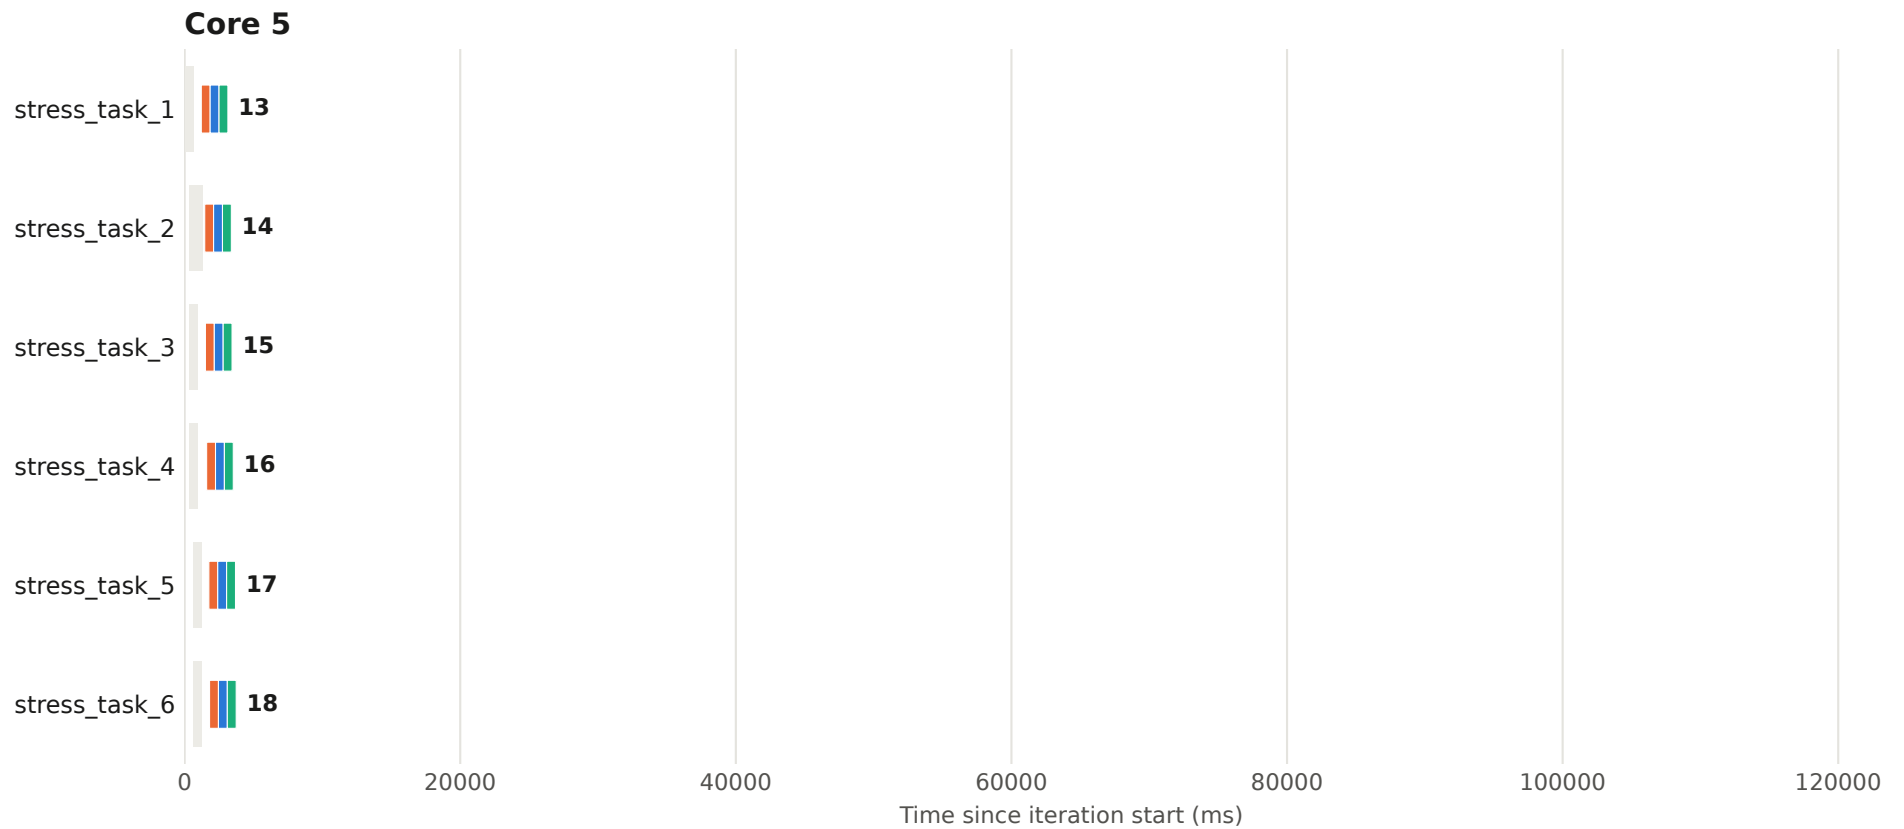


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 38 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

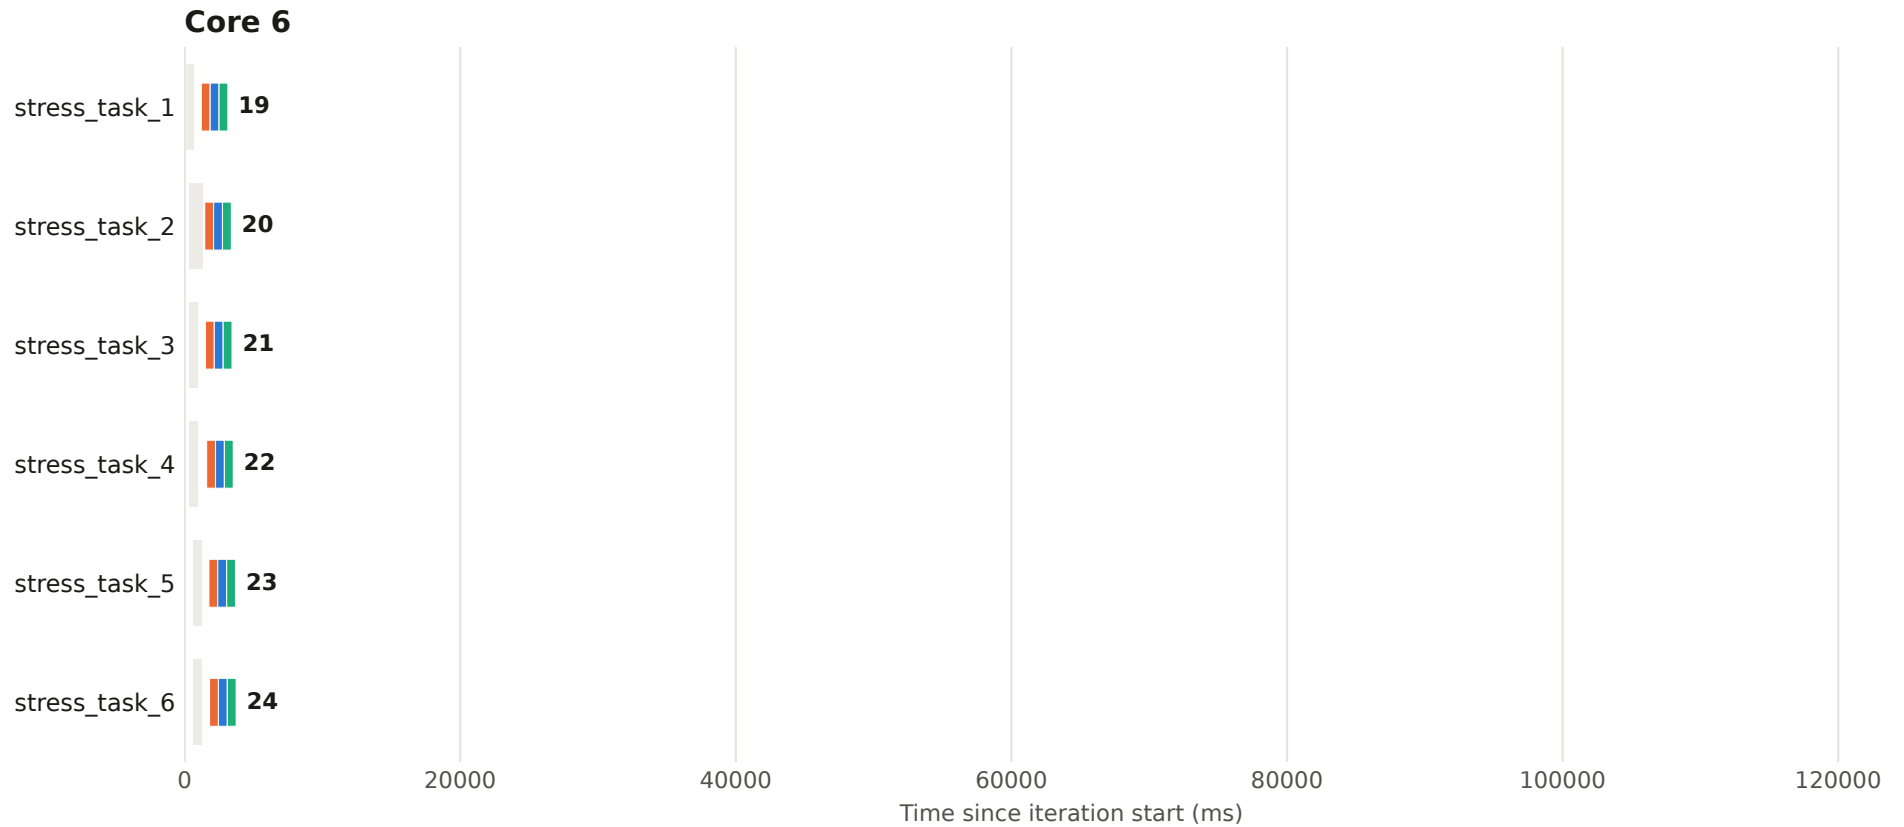


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 38 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

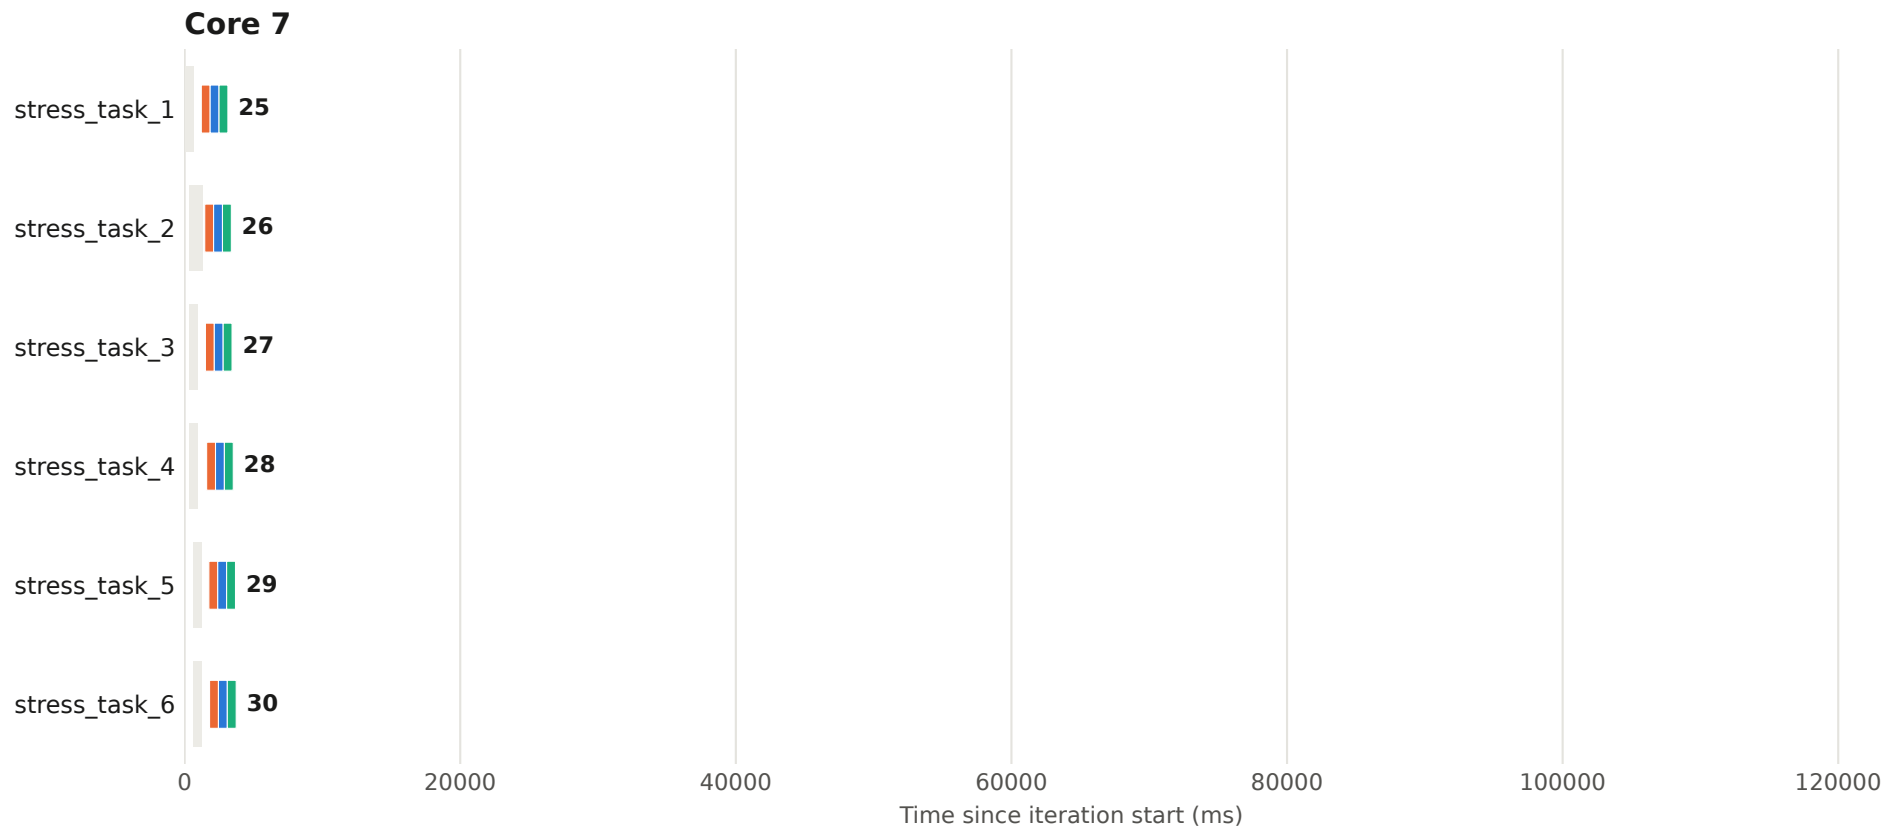


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 39 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

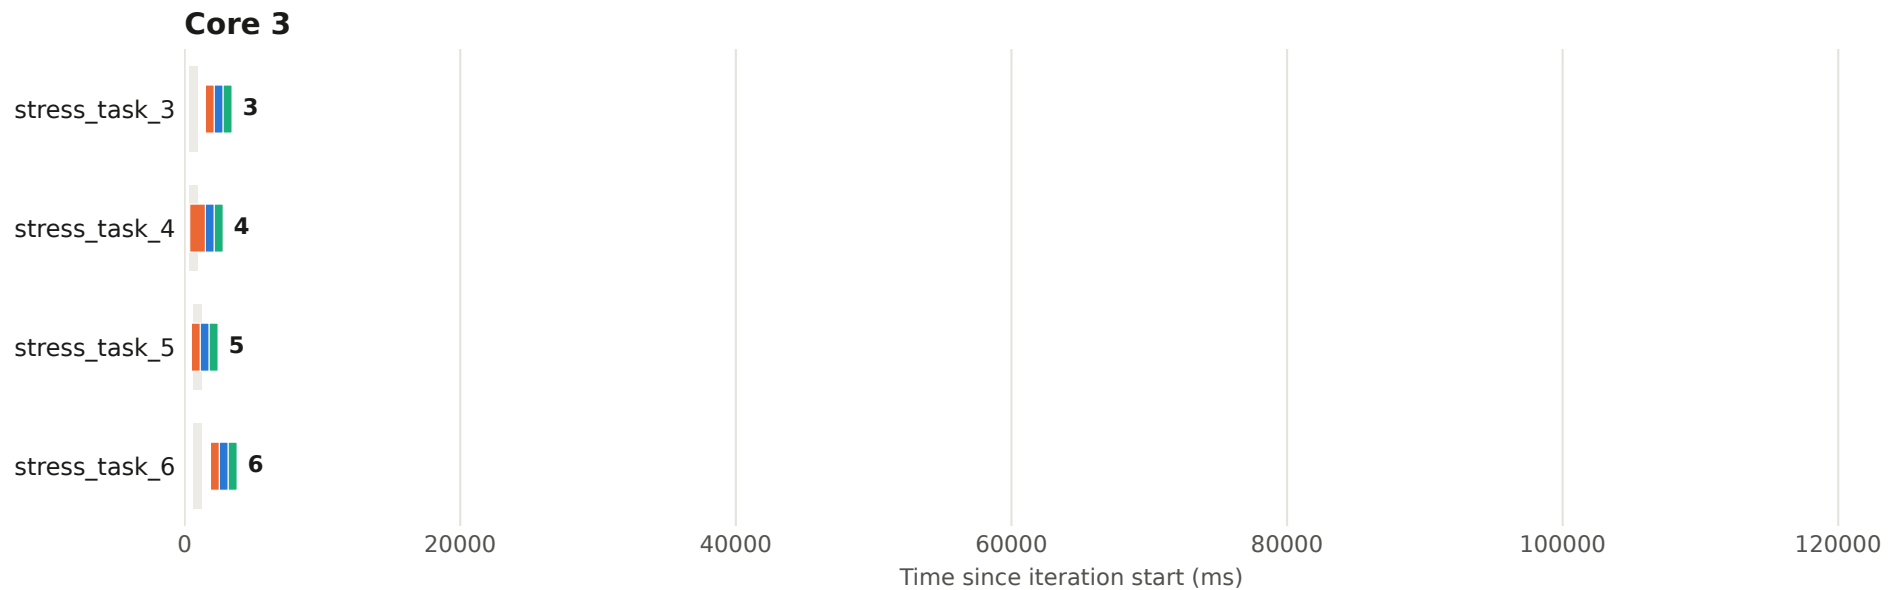

Execution plan - iteration 39 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

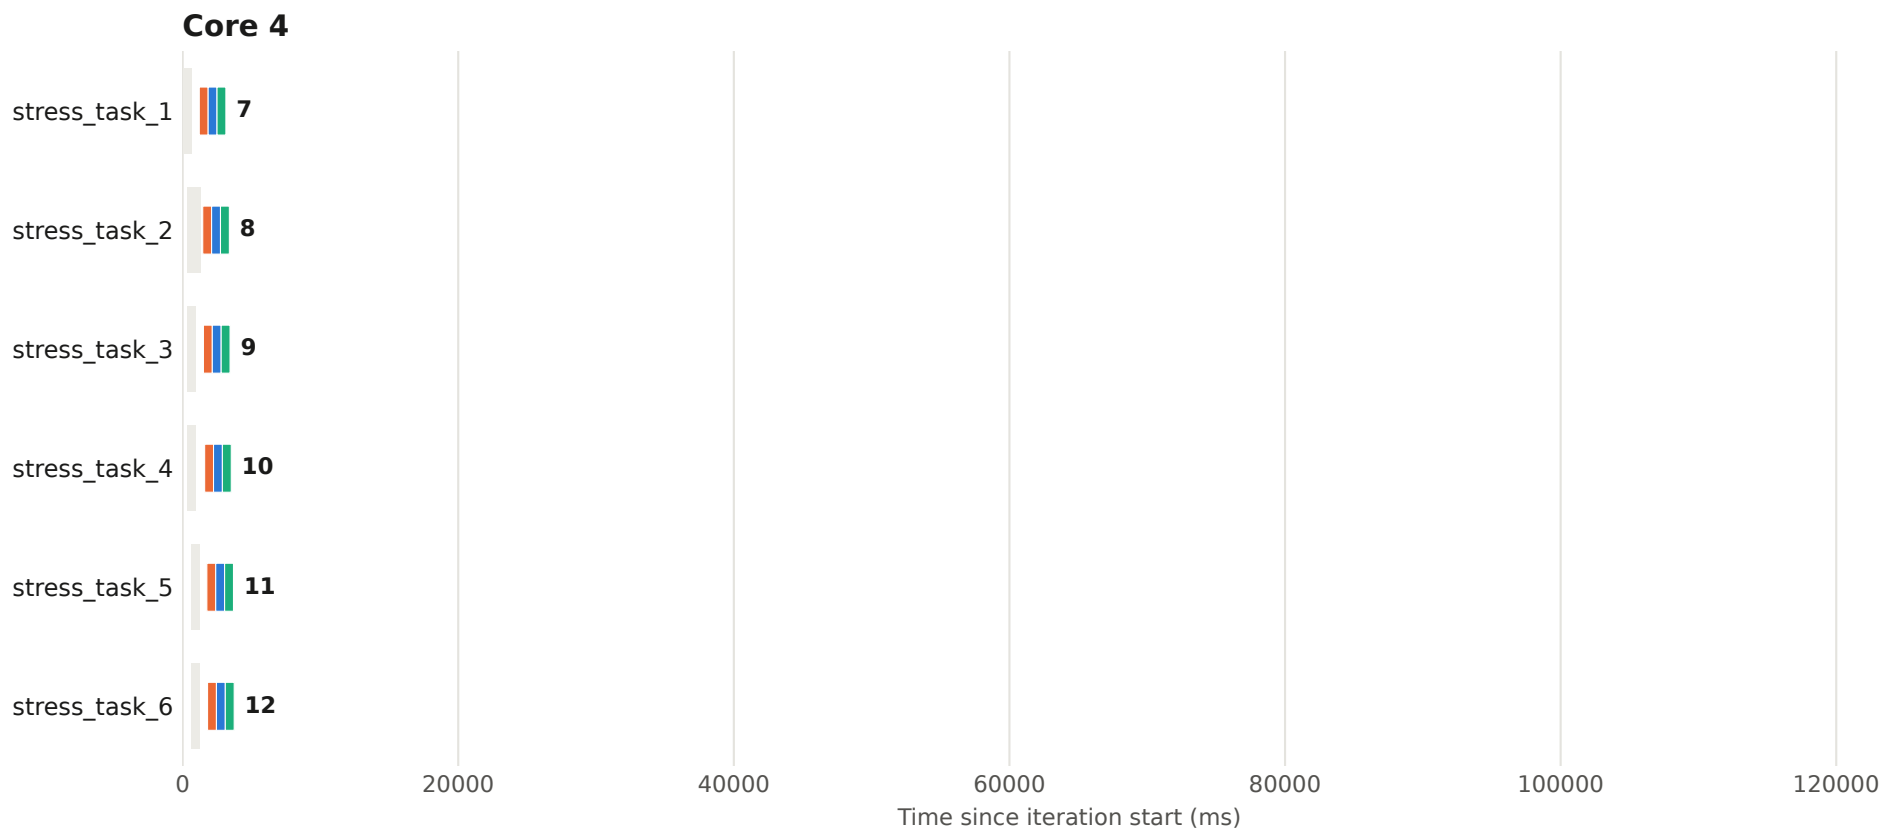


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 39 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

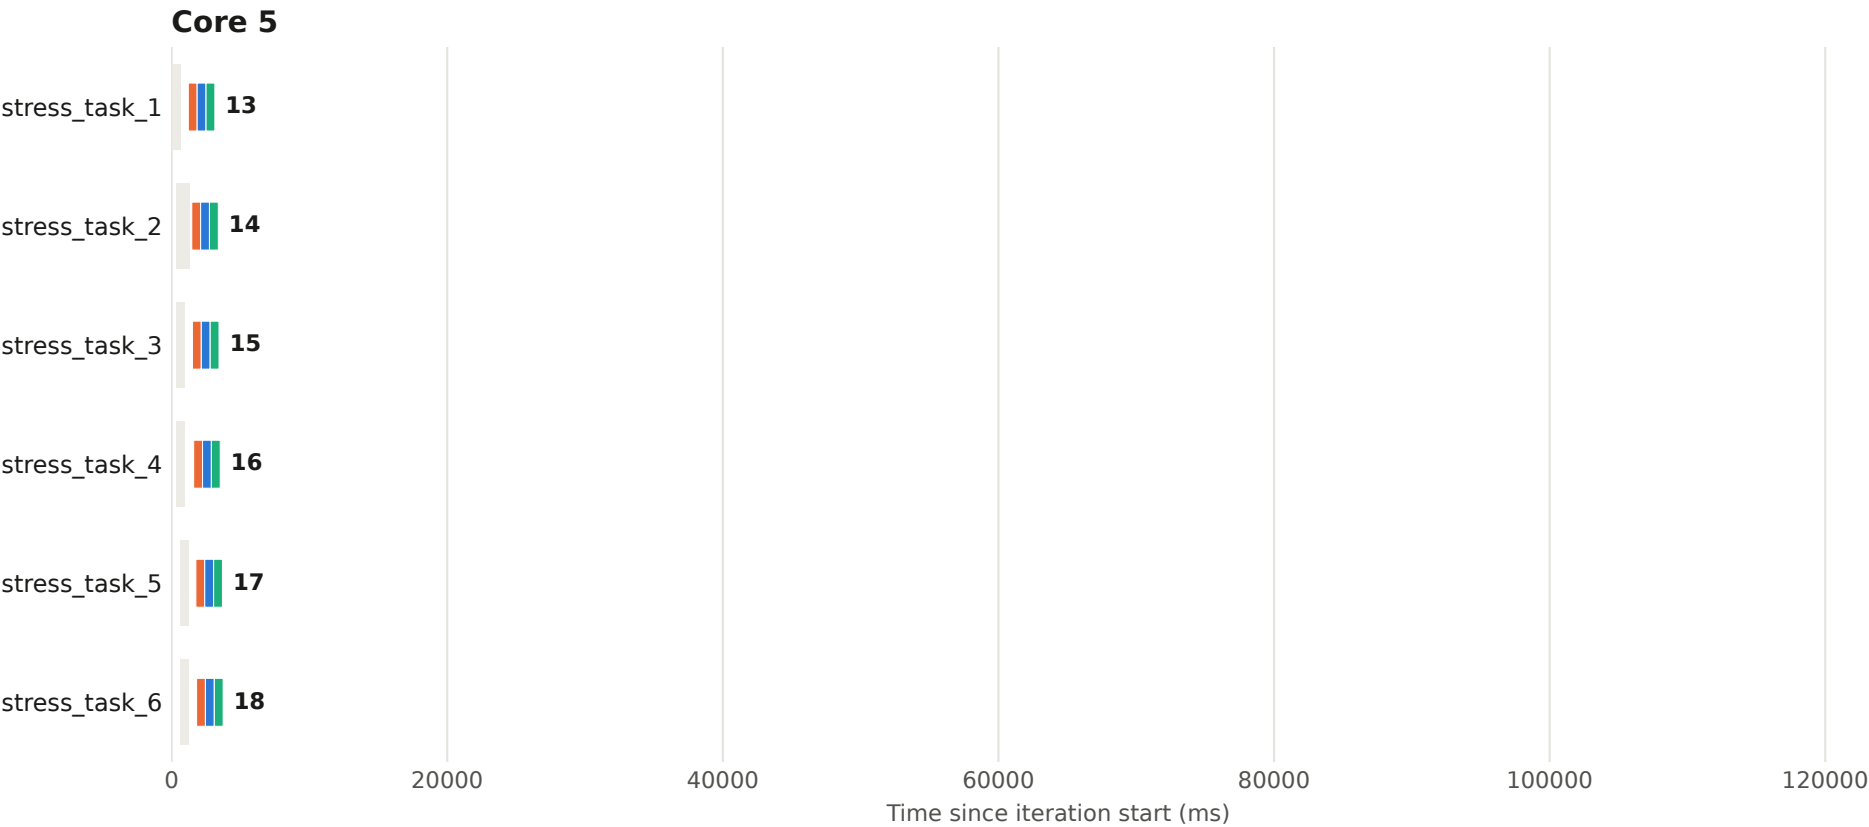


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 39 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

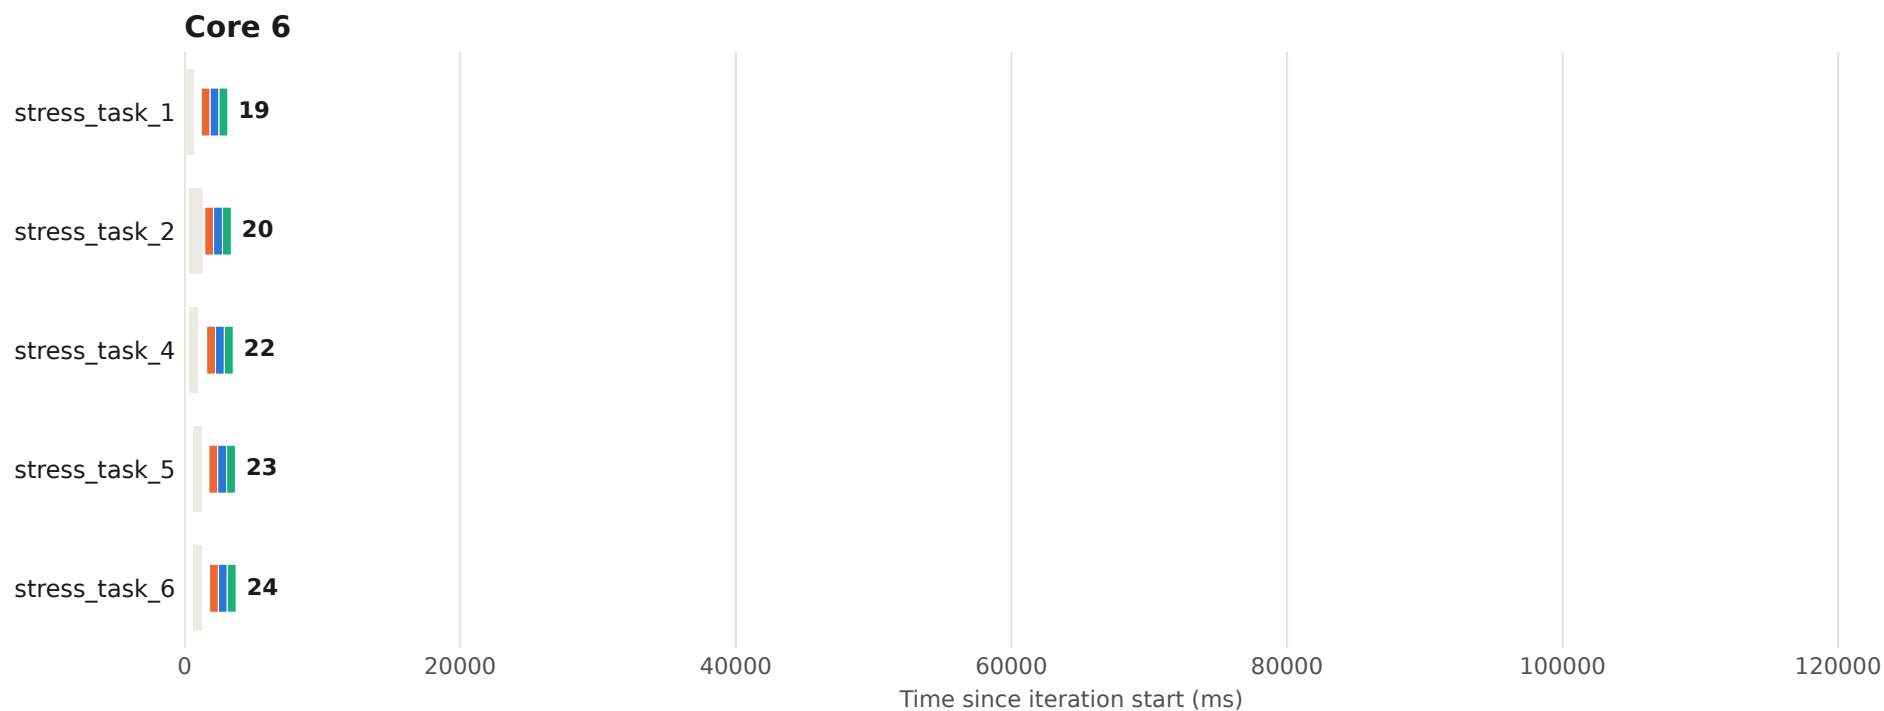


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 39 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

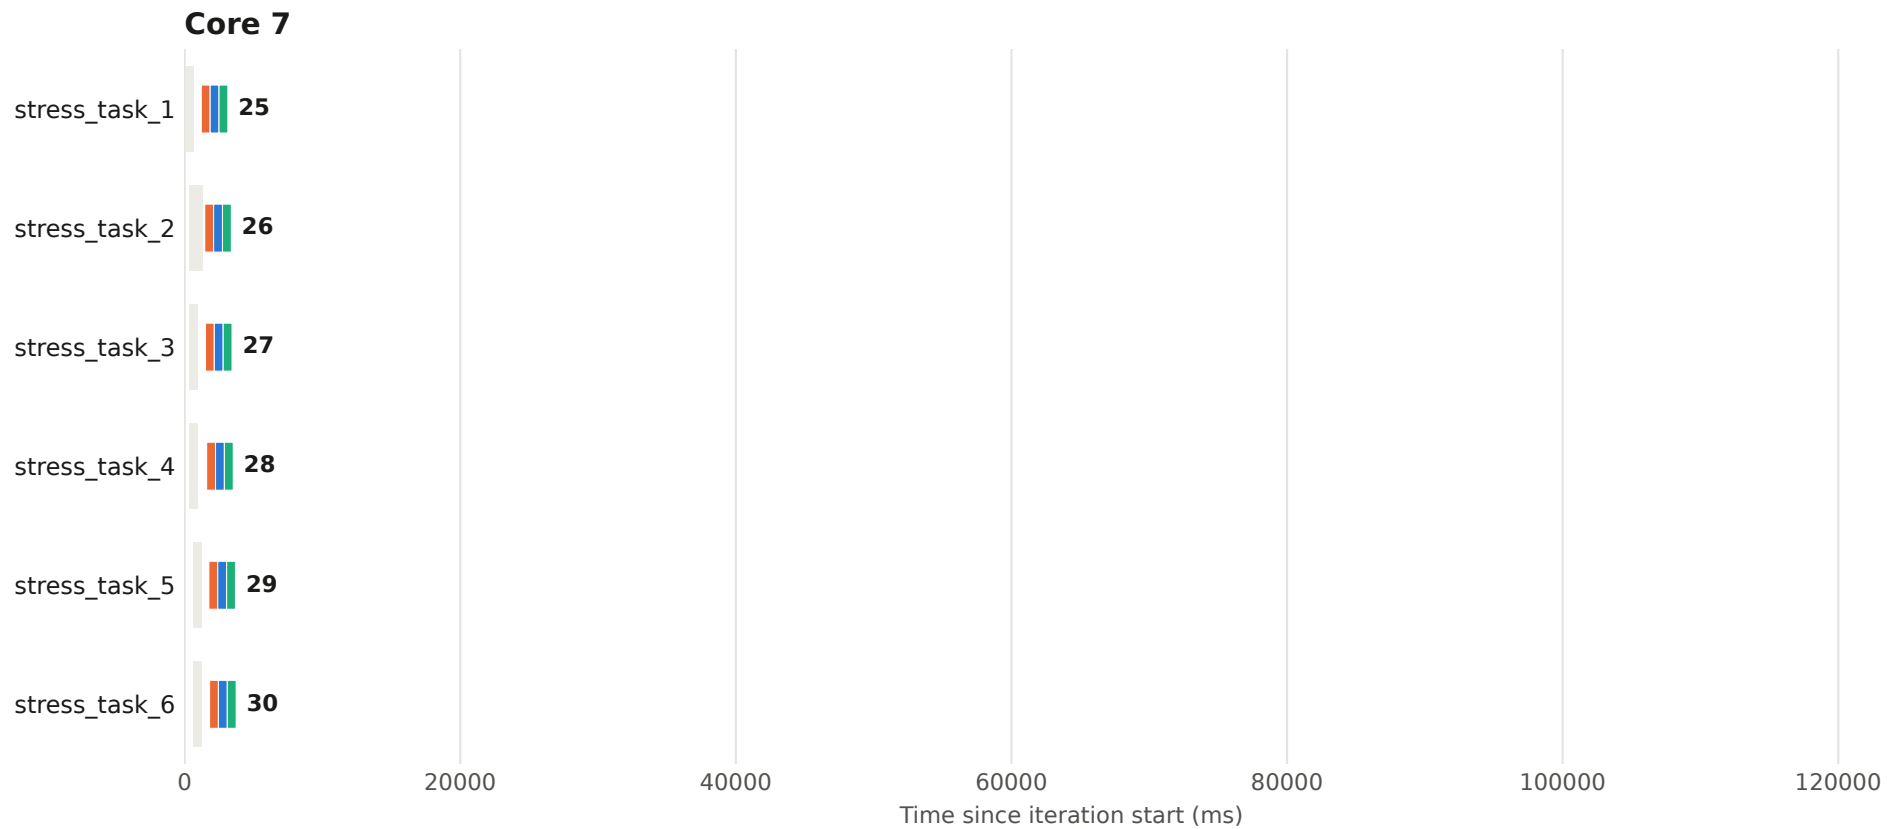


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 39 - core 62026

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

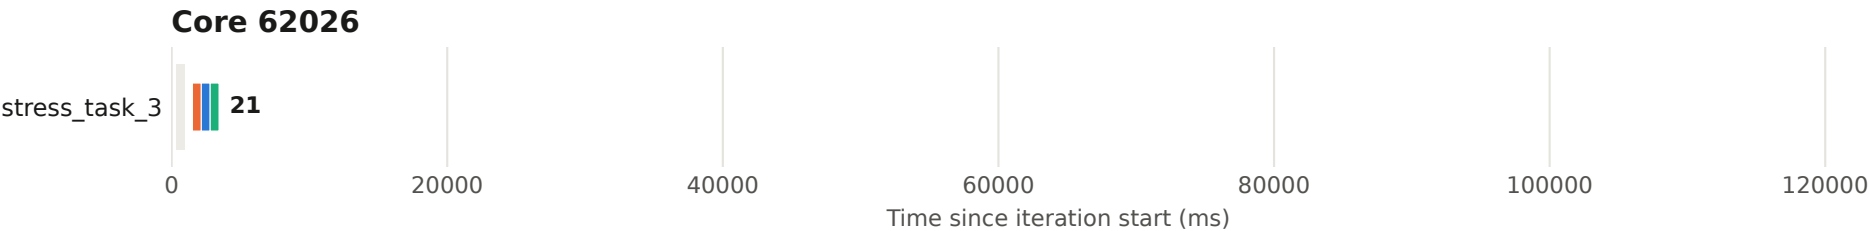


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 40 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

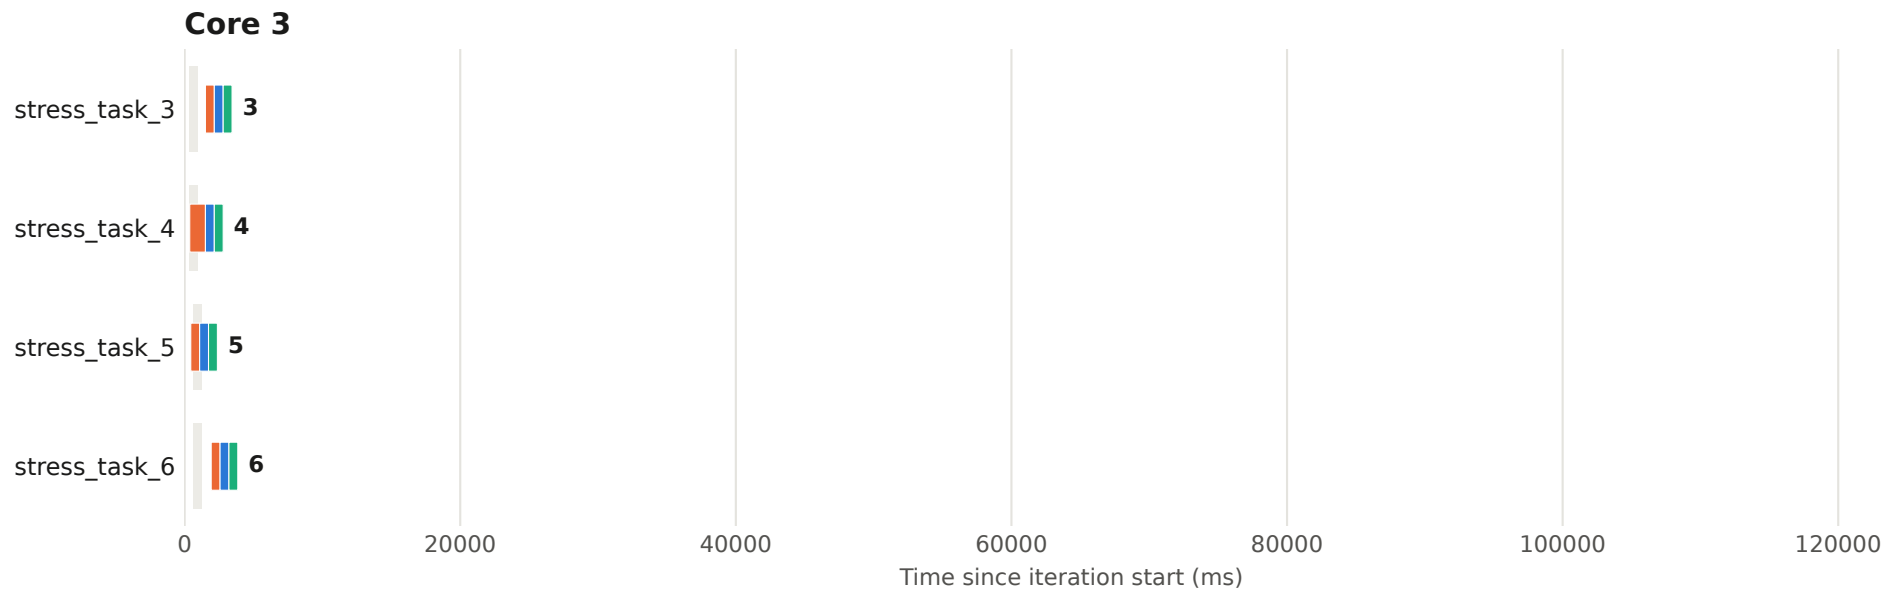

Execution plan - iteration 40 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

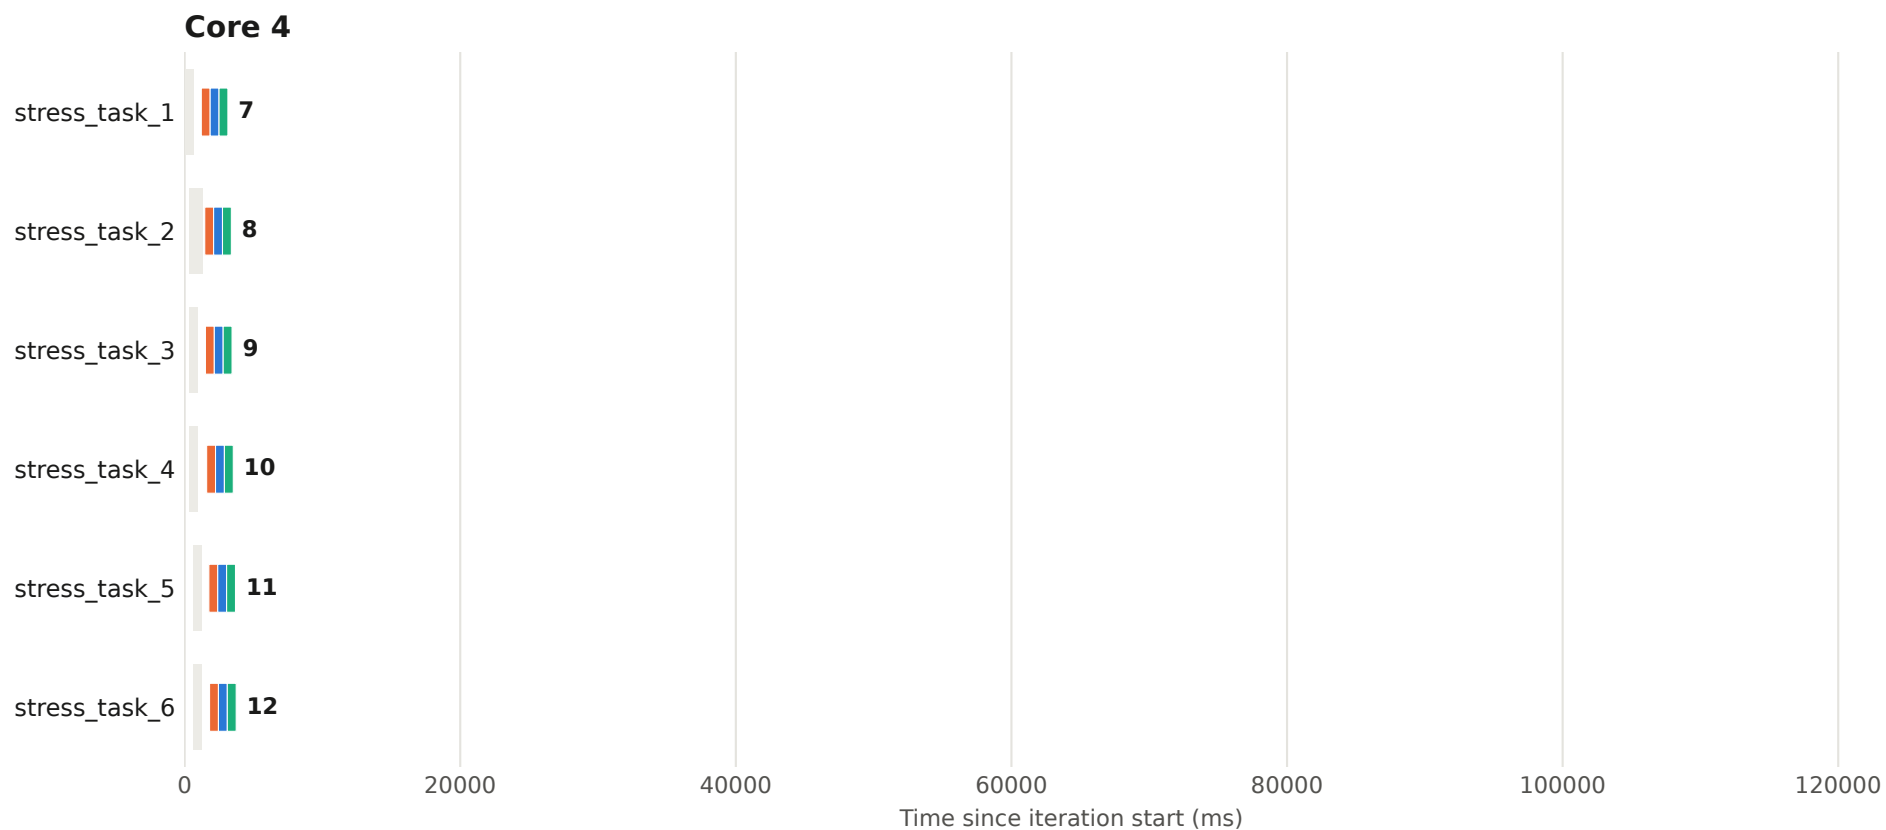


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 40 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

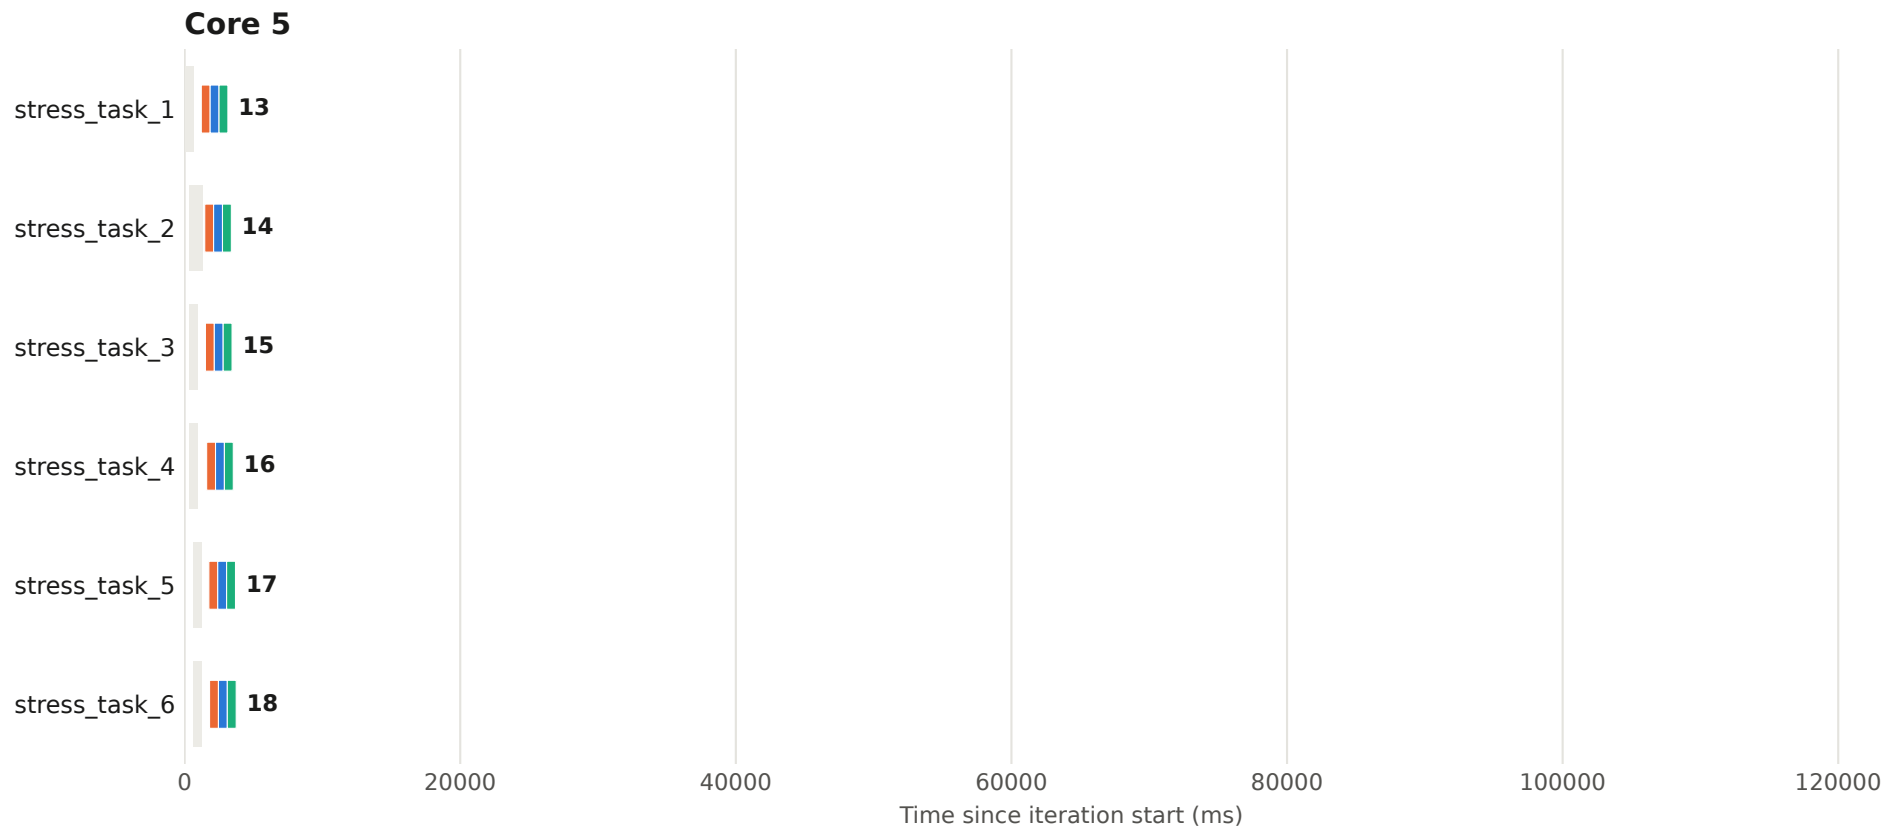


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 40 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

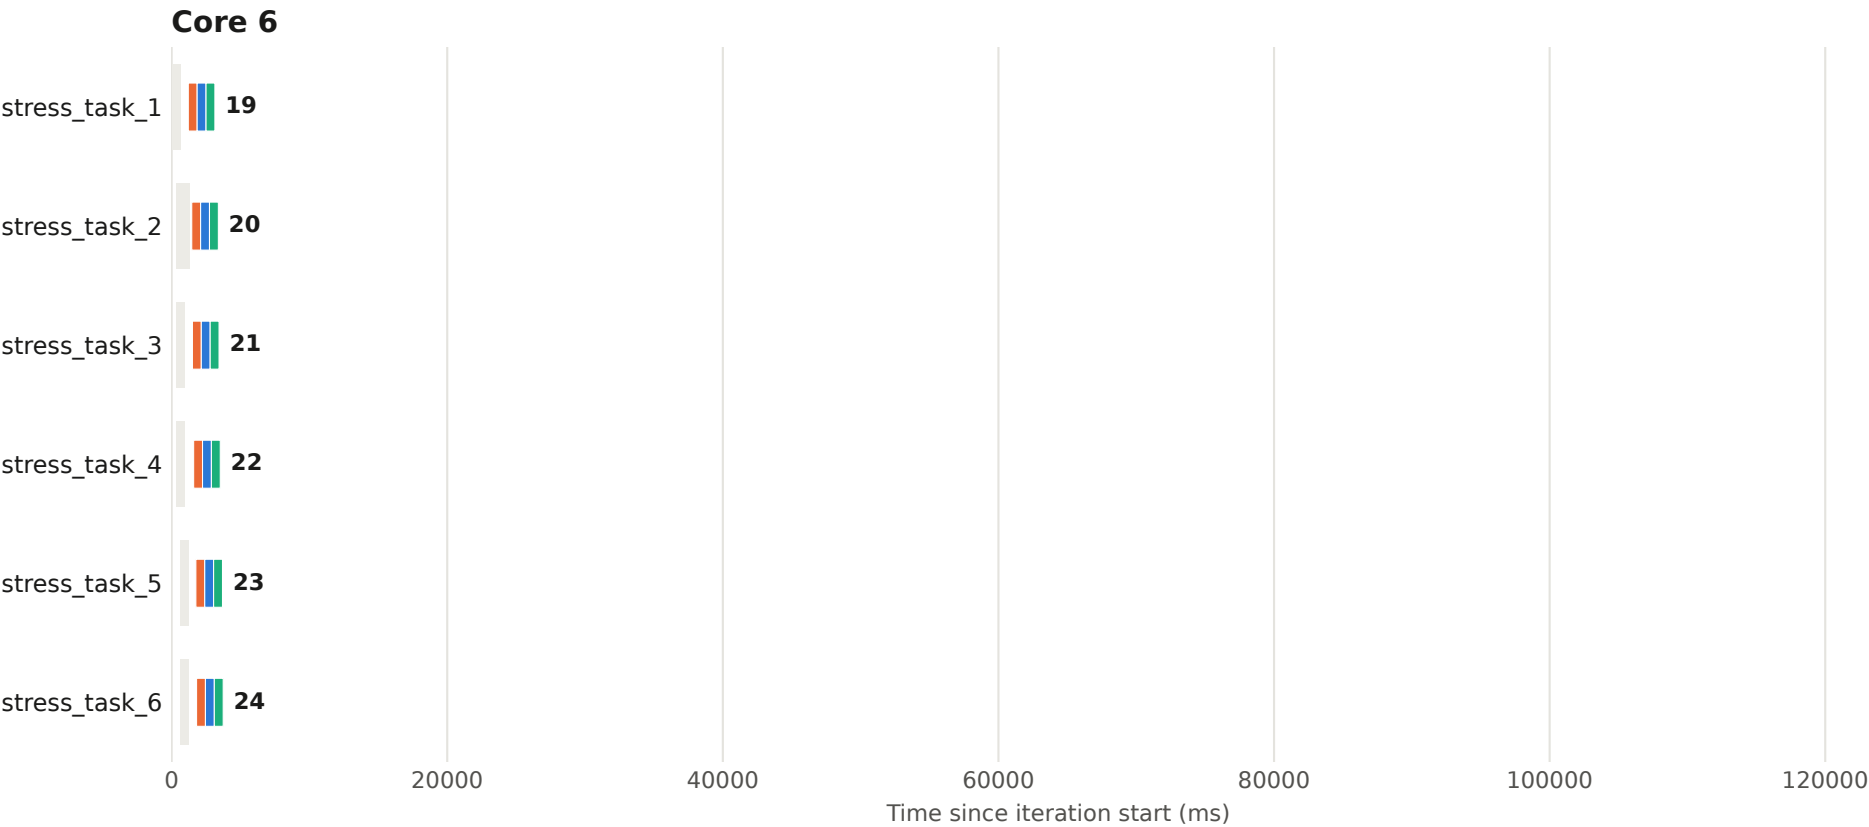


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 40 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

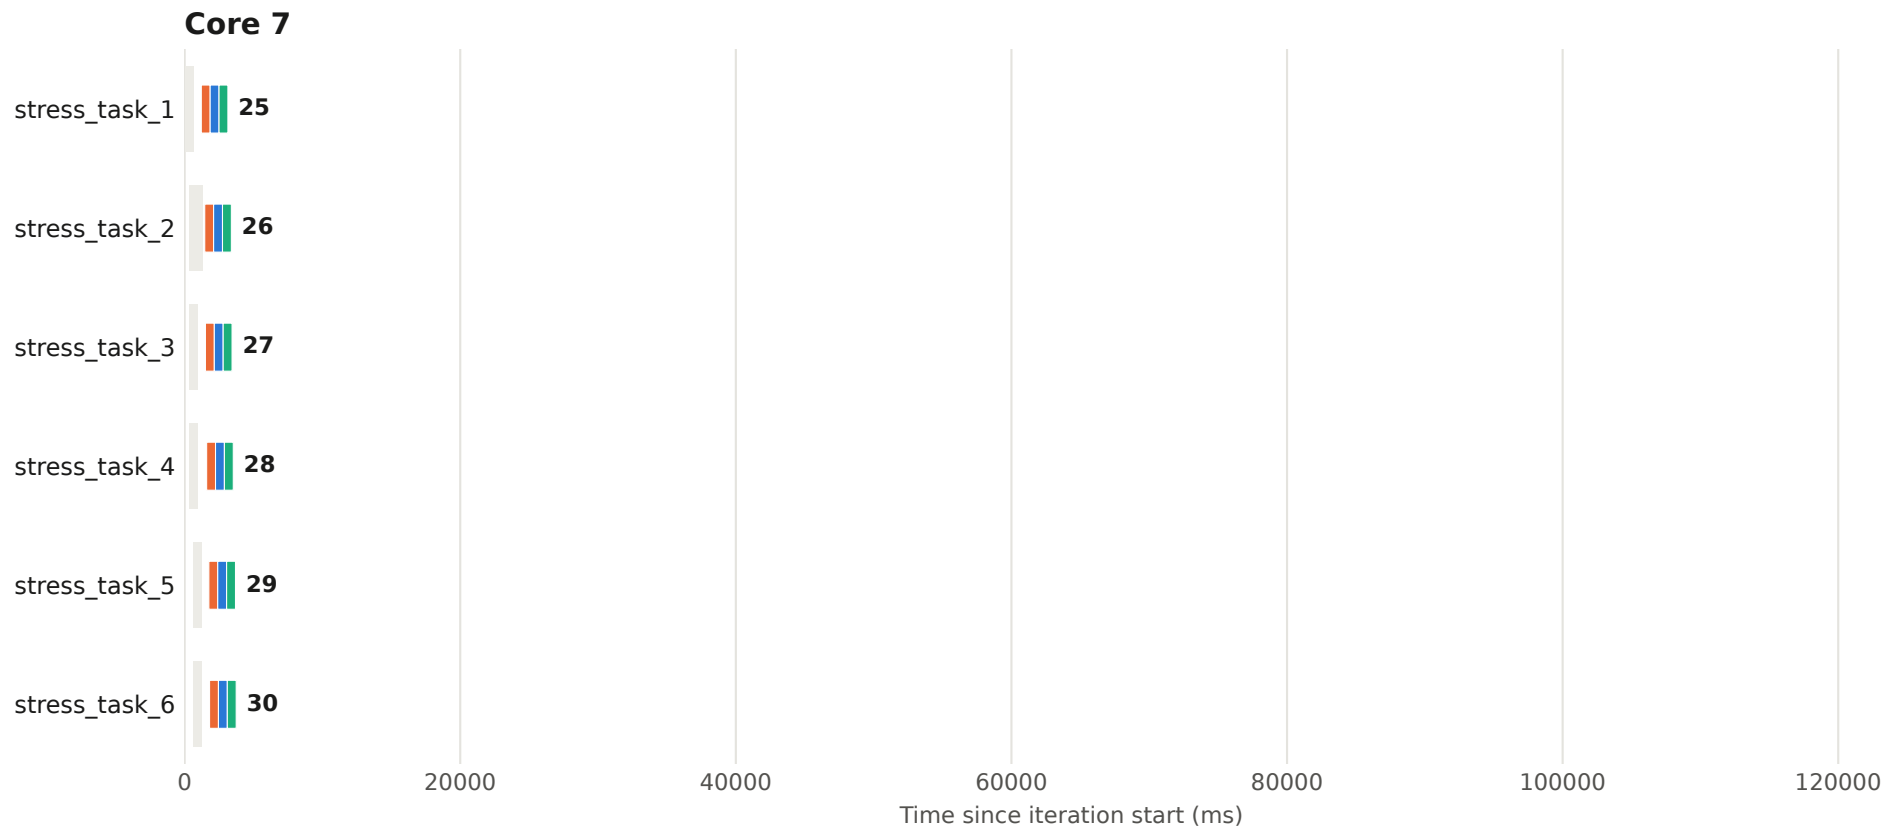


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 41 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

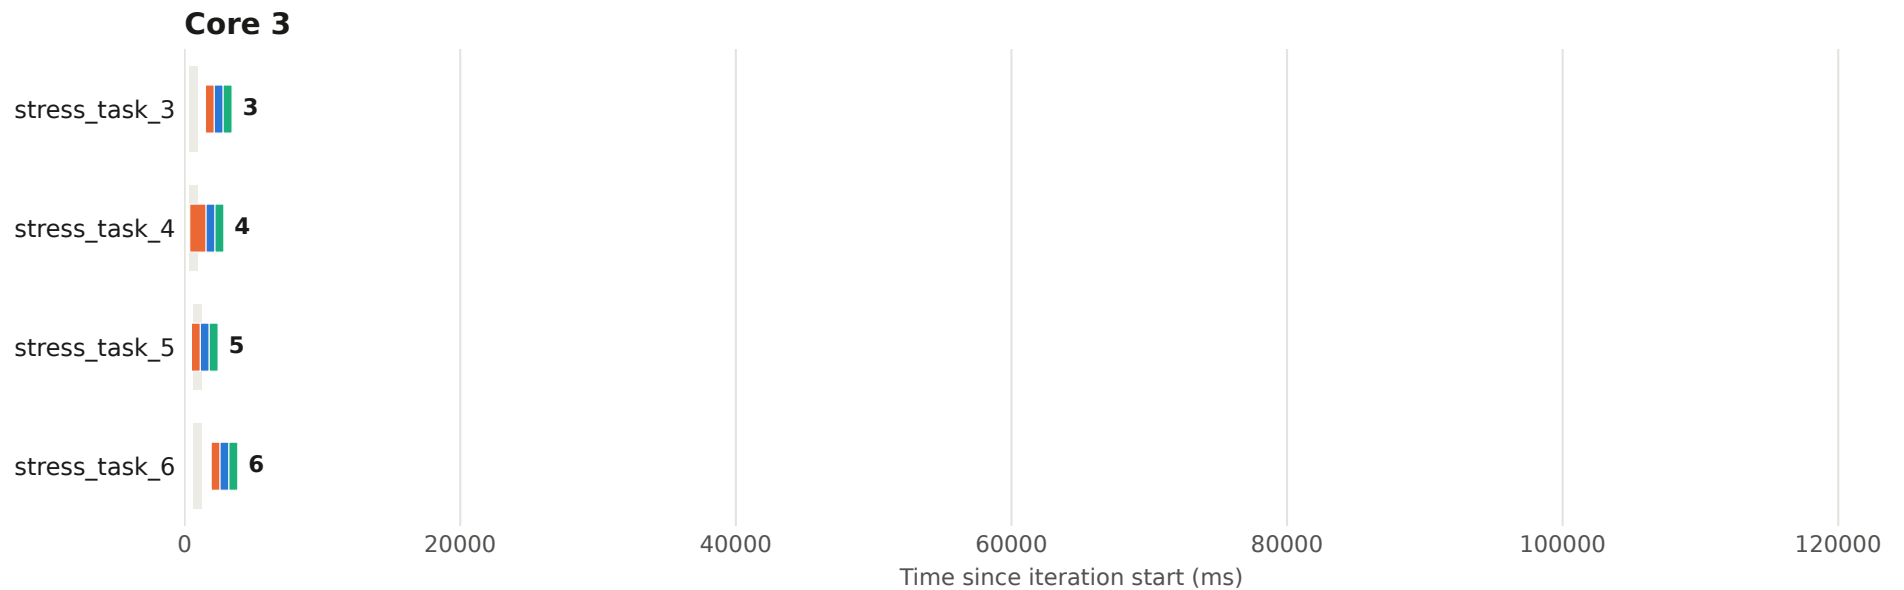

Execution plan - iteration 41 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

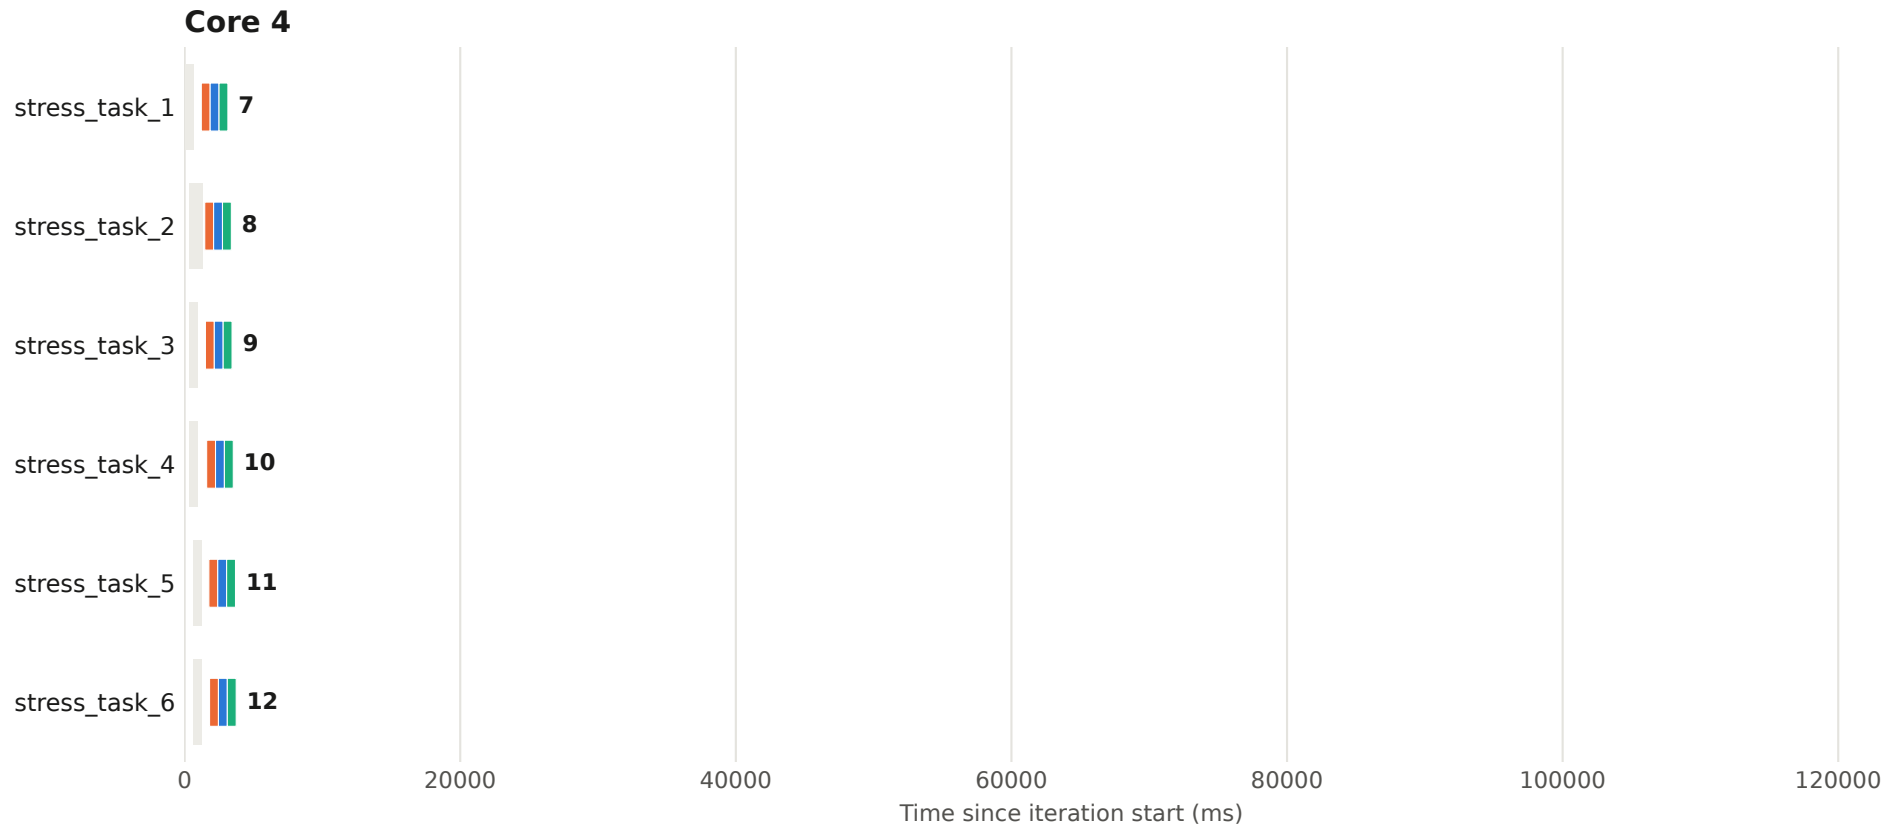


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 41 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

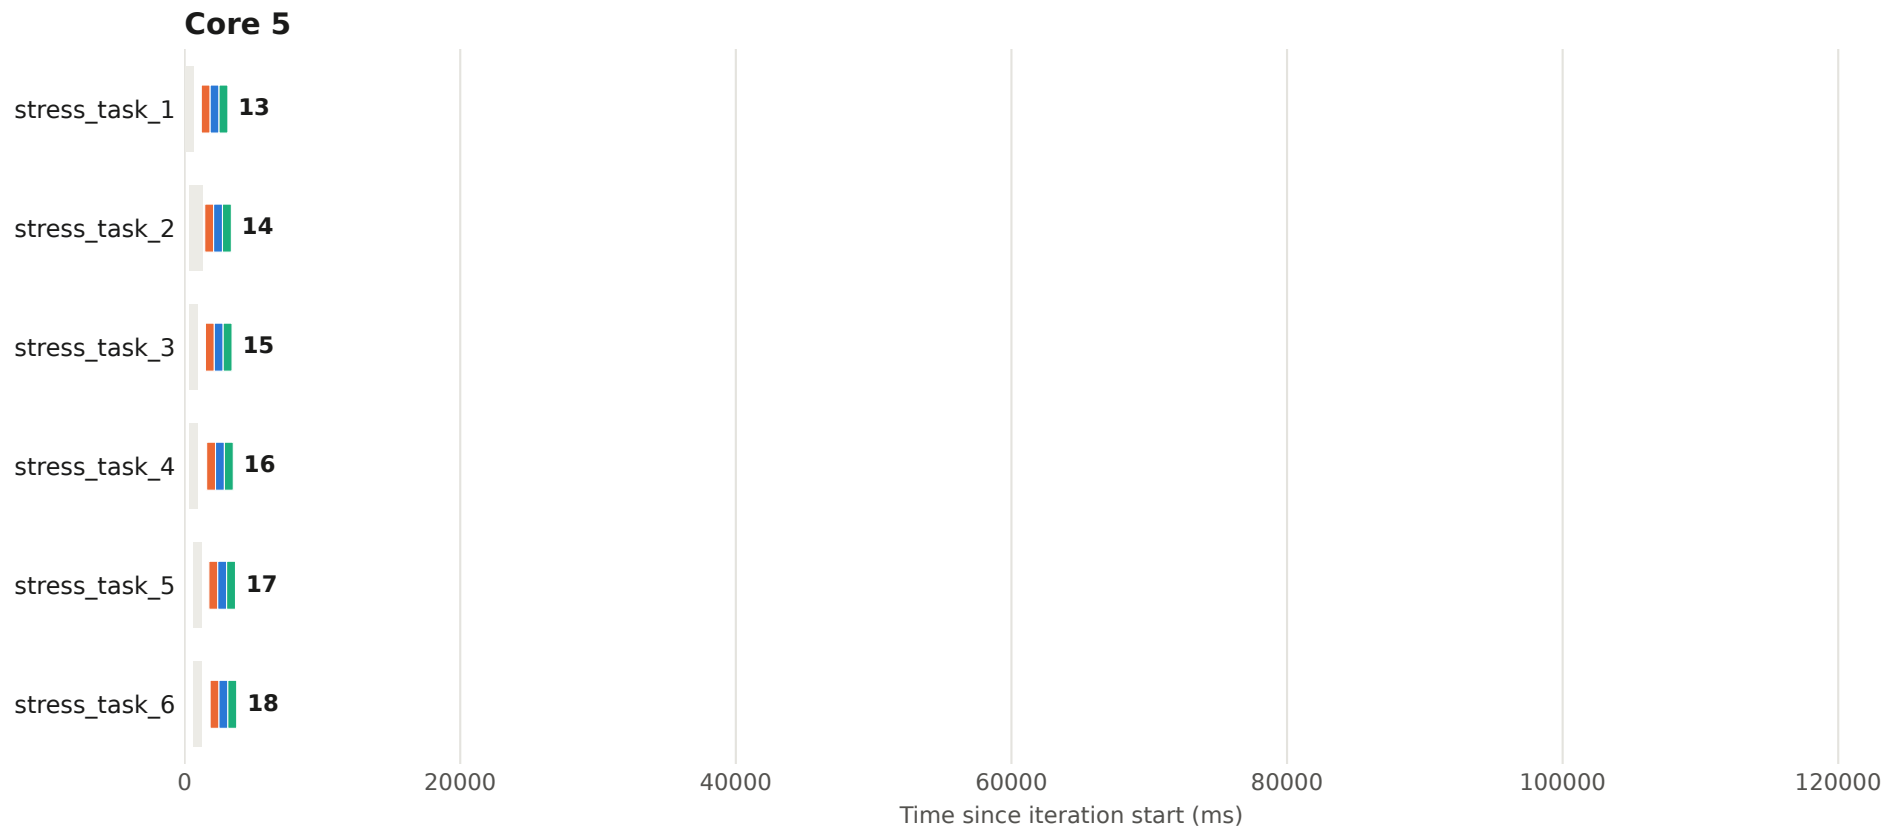


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 41 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

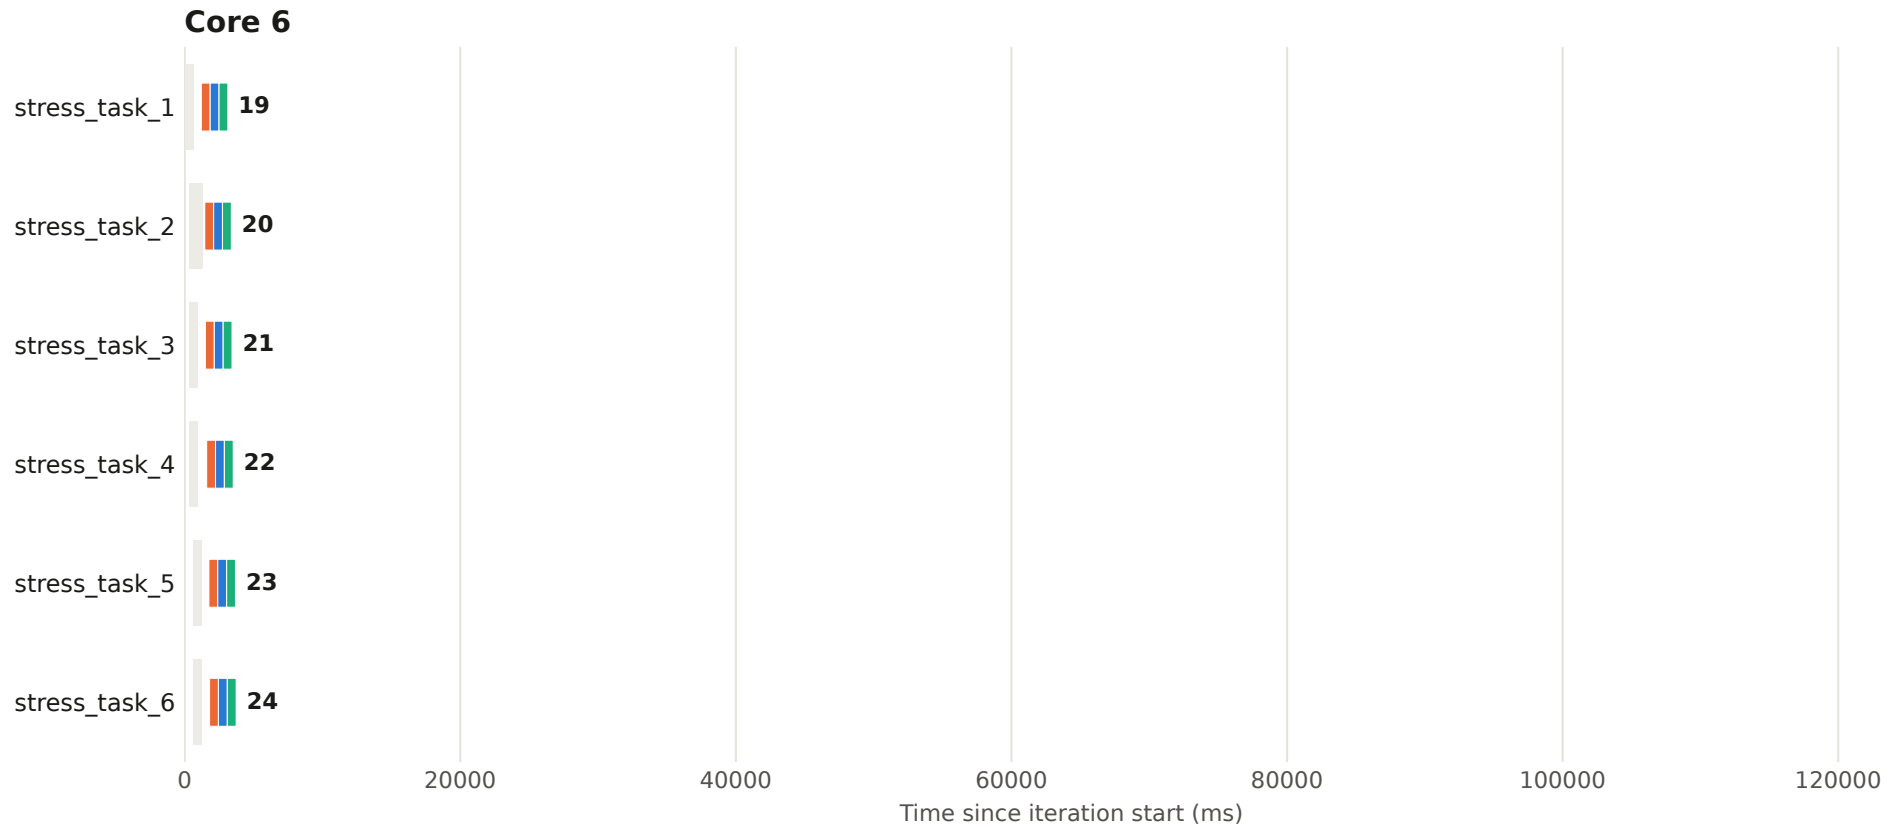


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 41 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

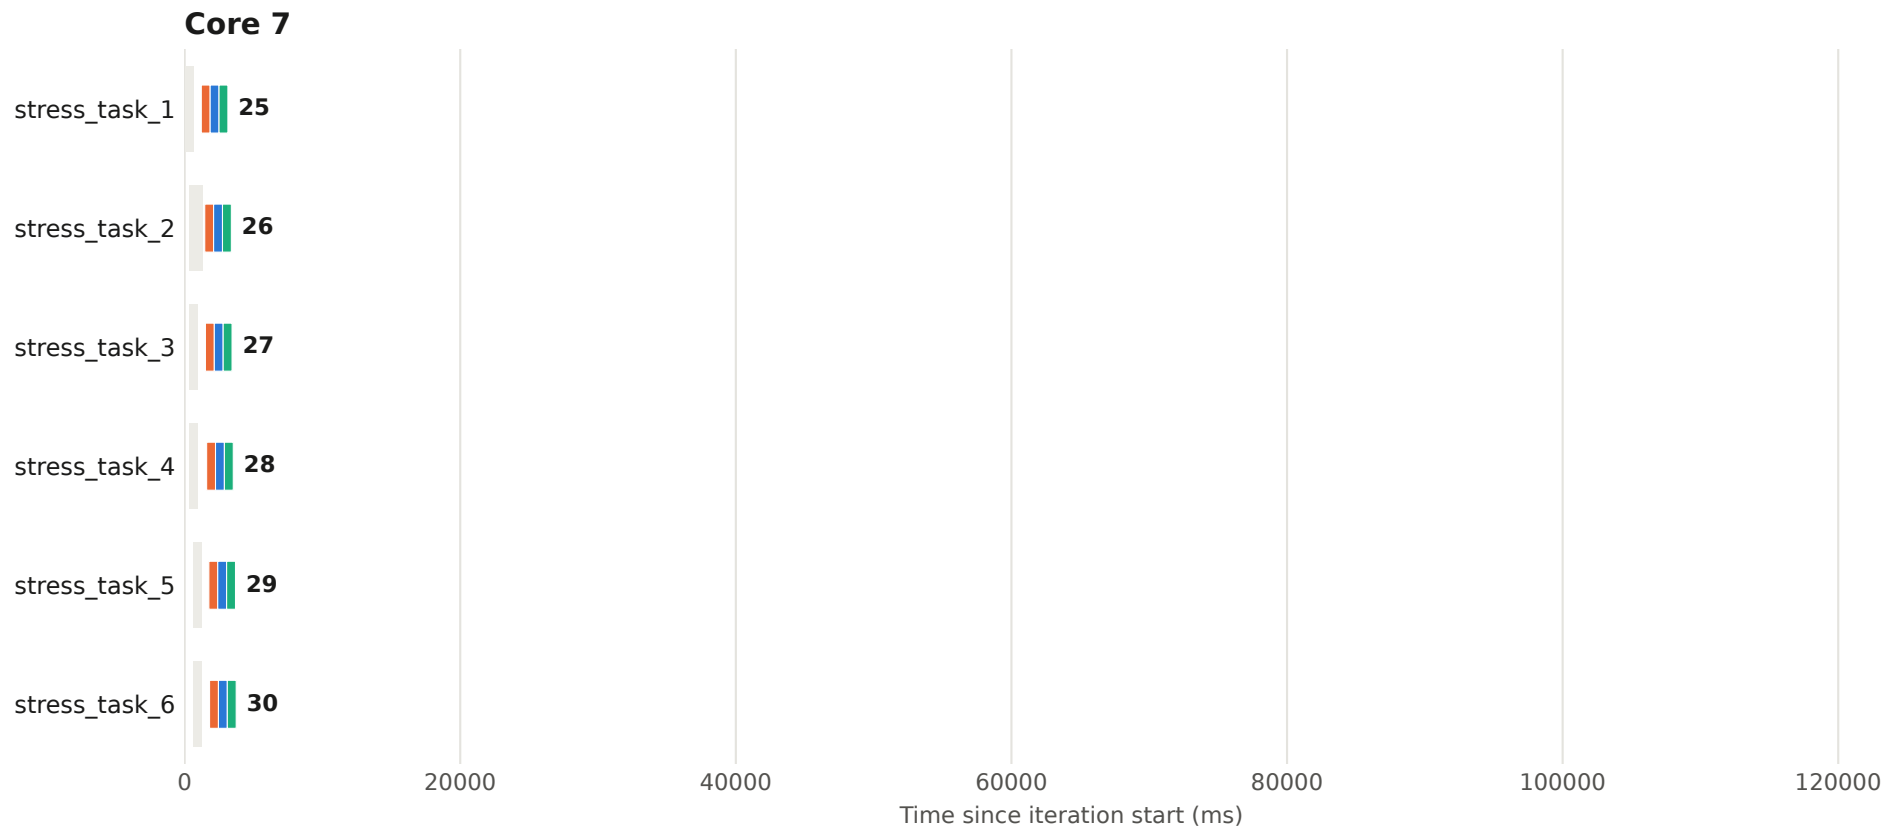


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 42 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

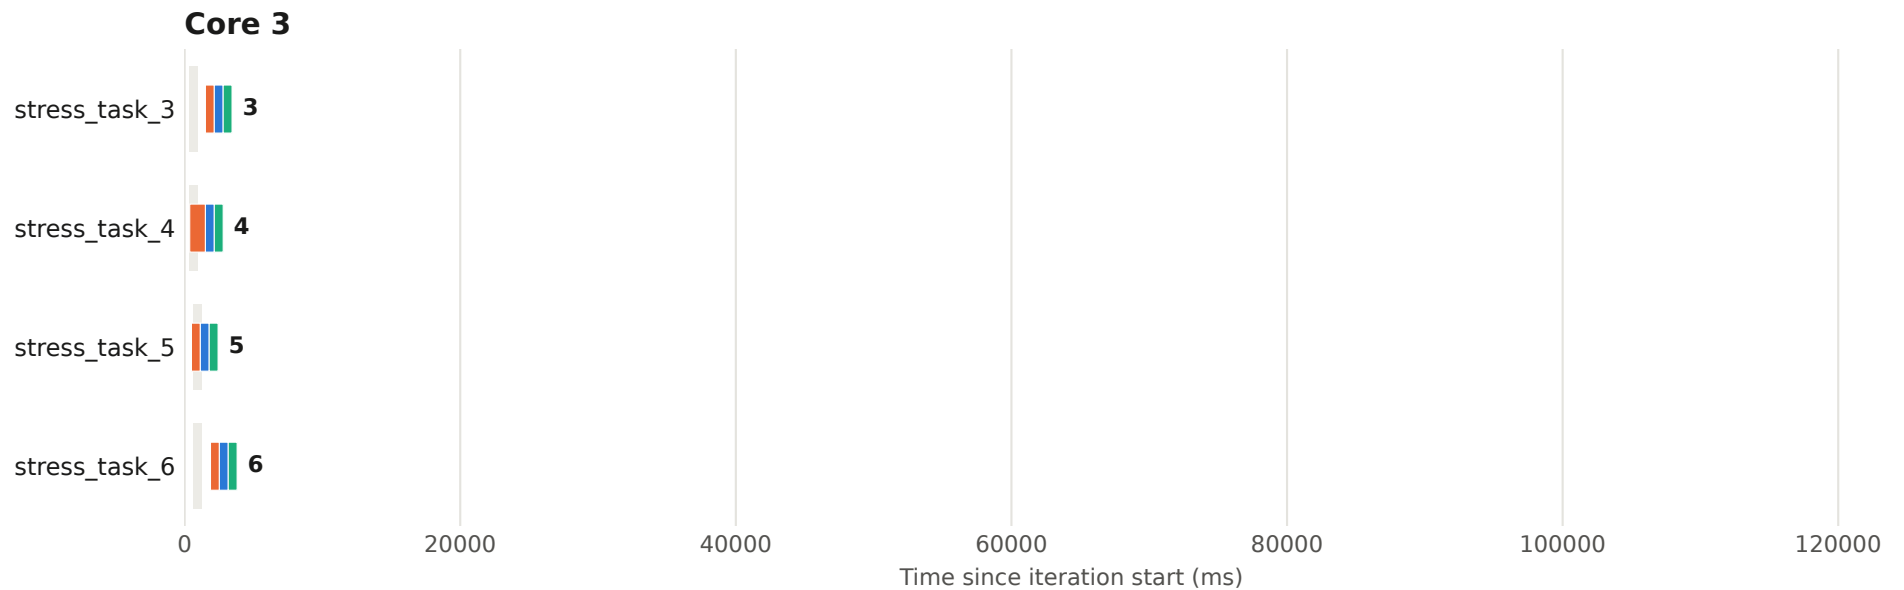


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 42 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

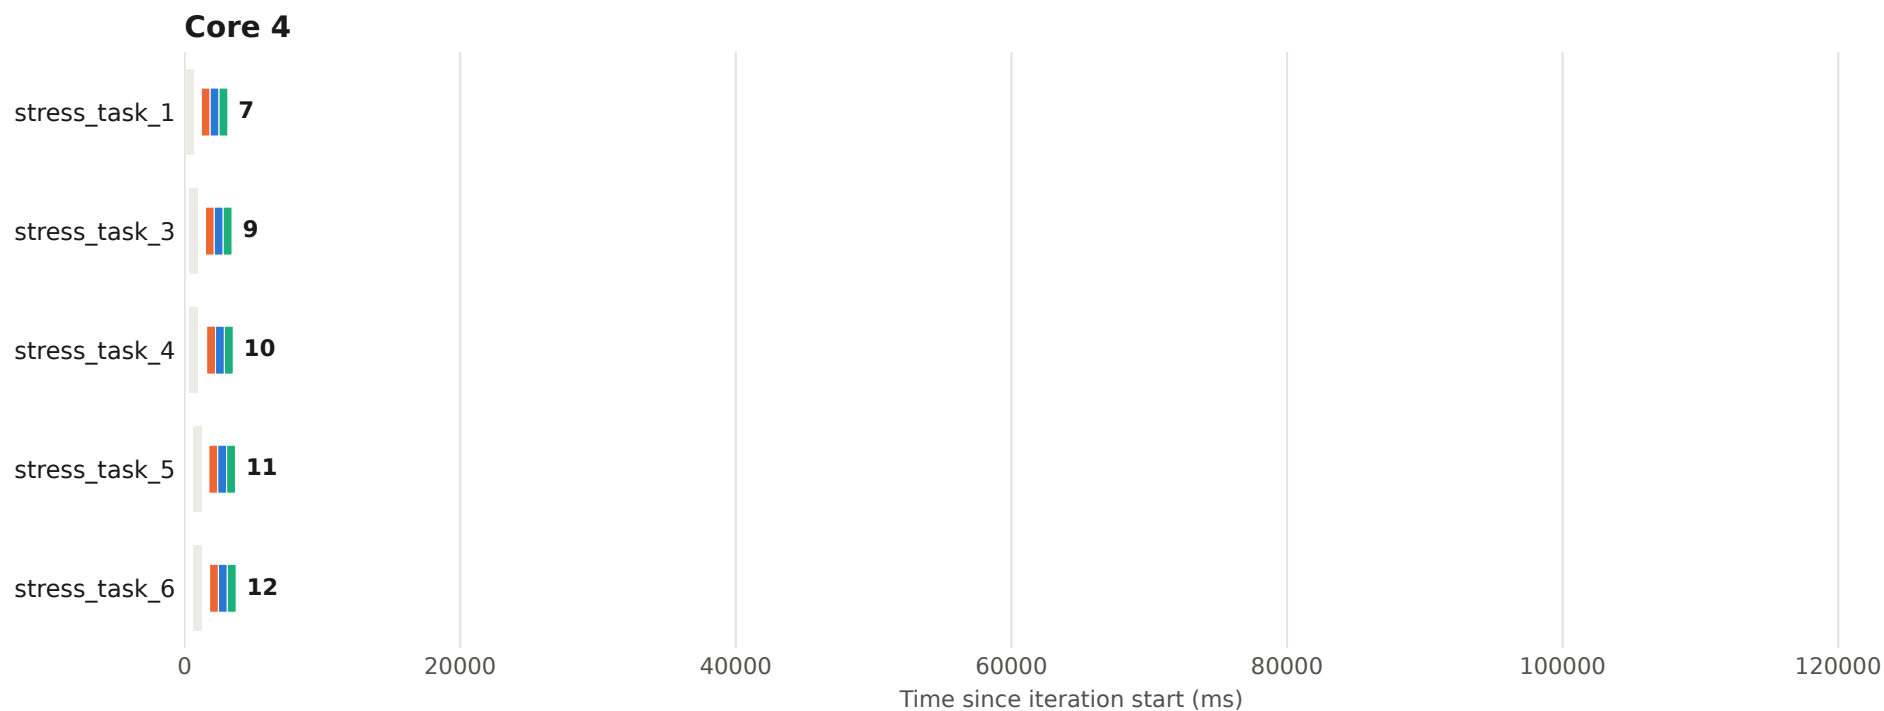


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 42 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

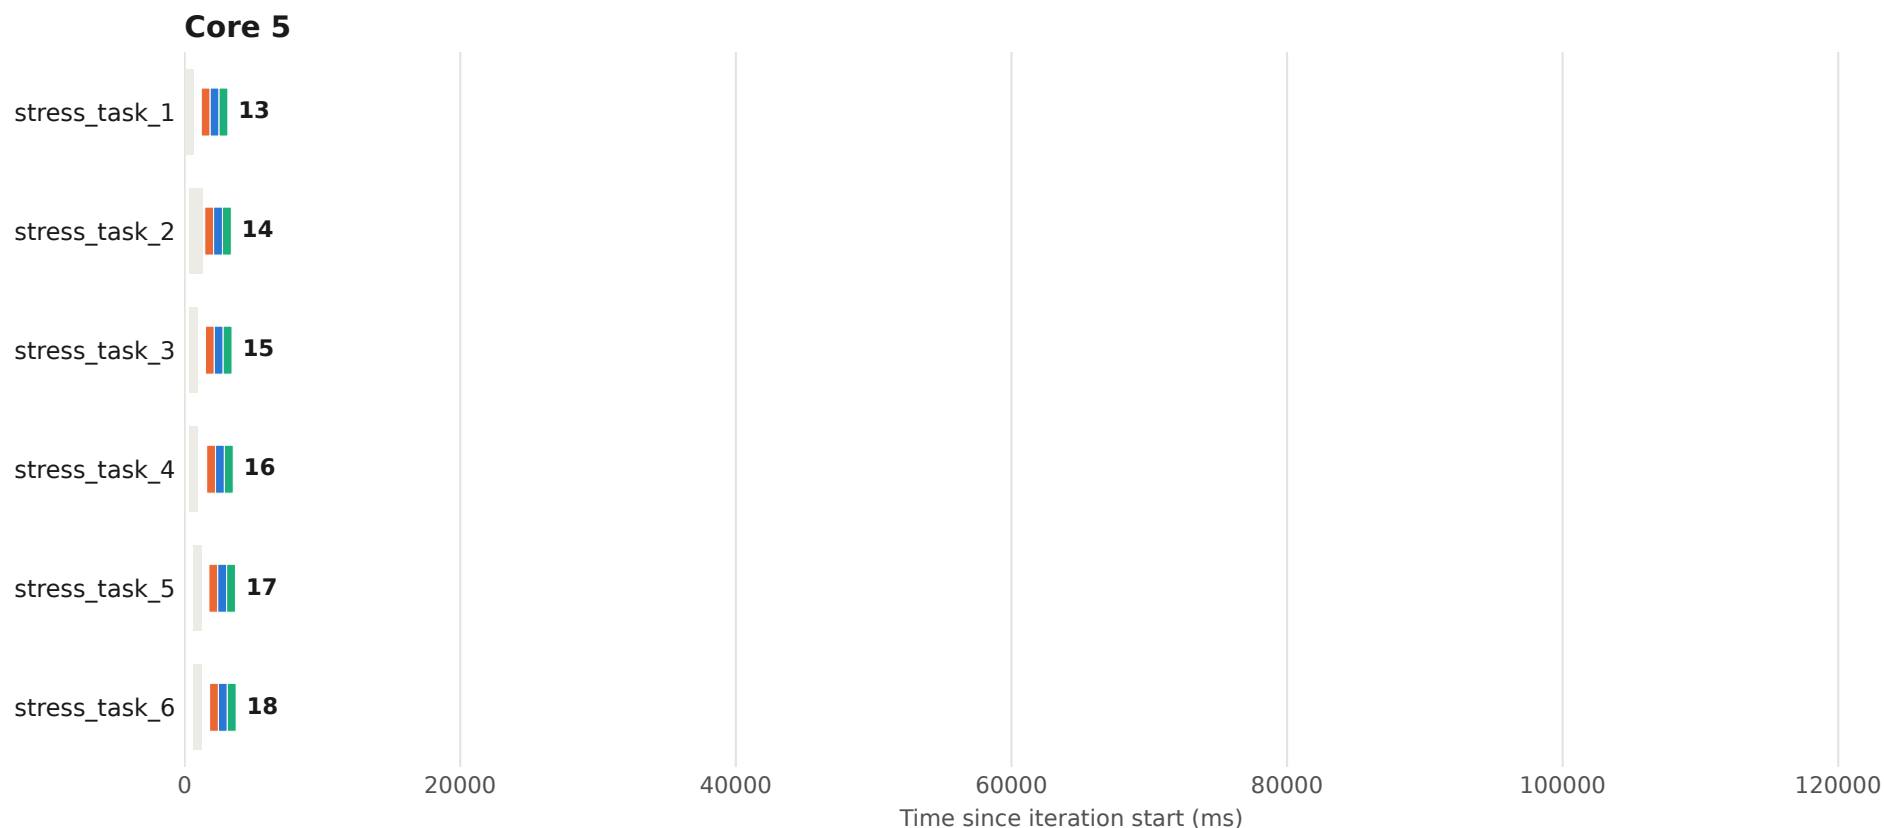


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 42 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

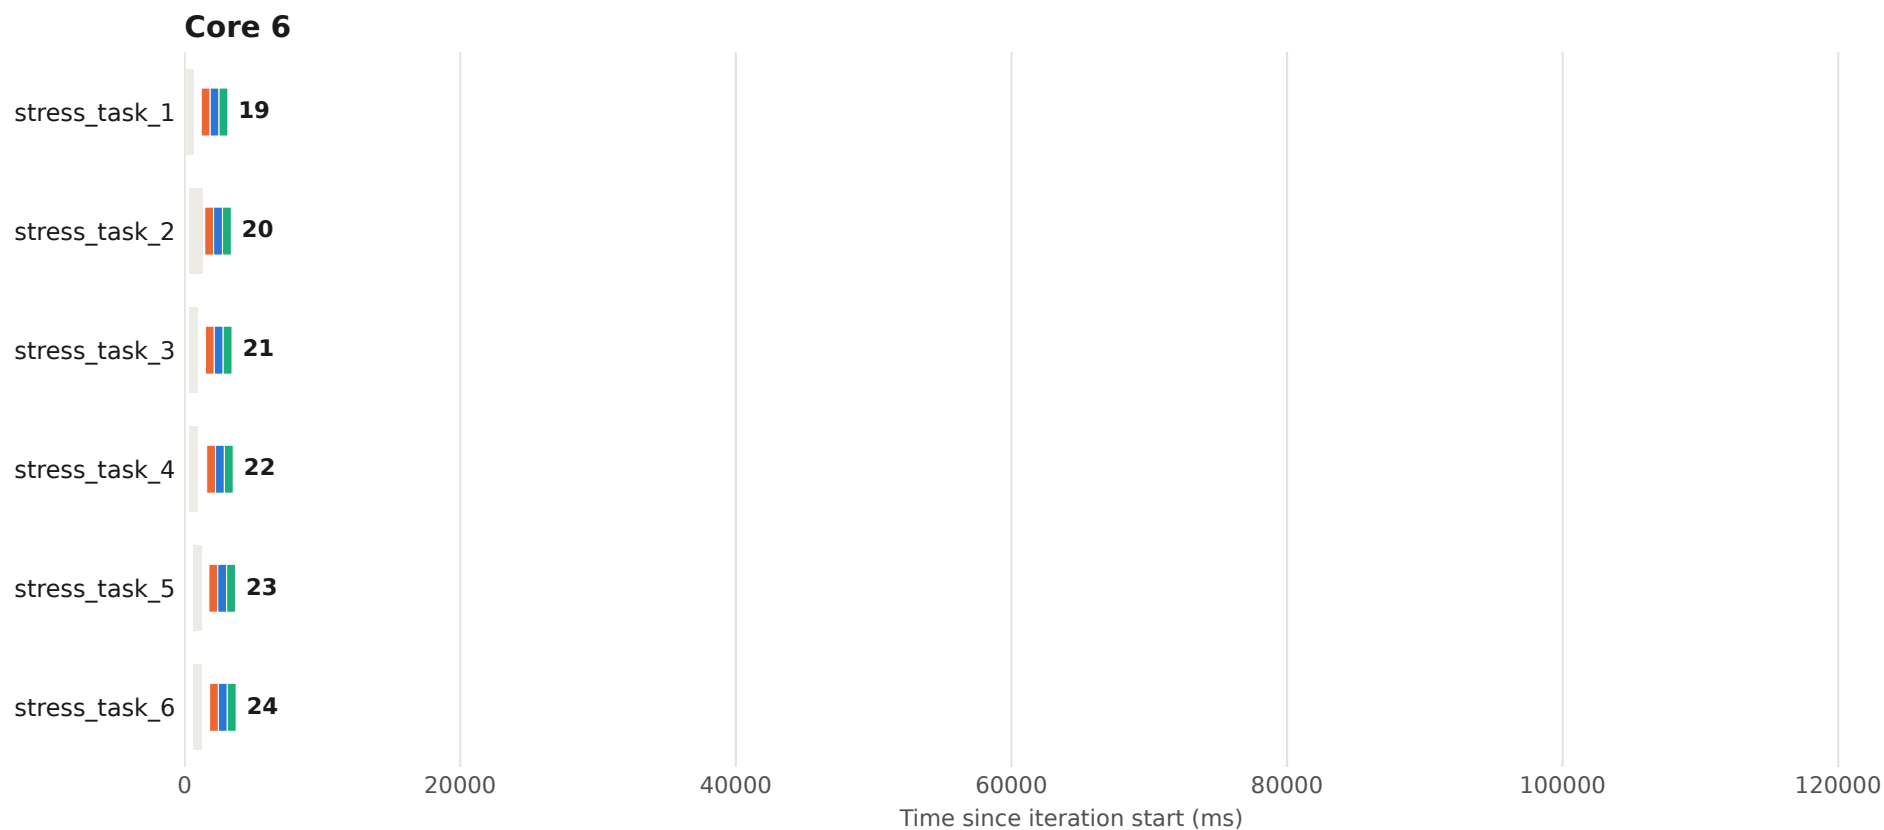


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 42 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

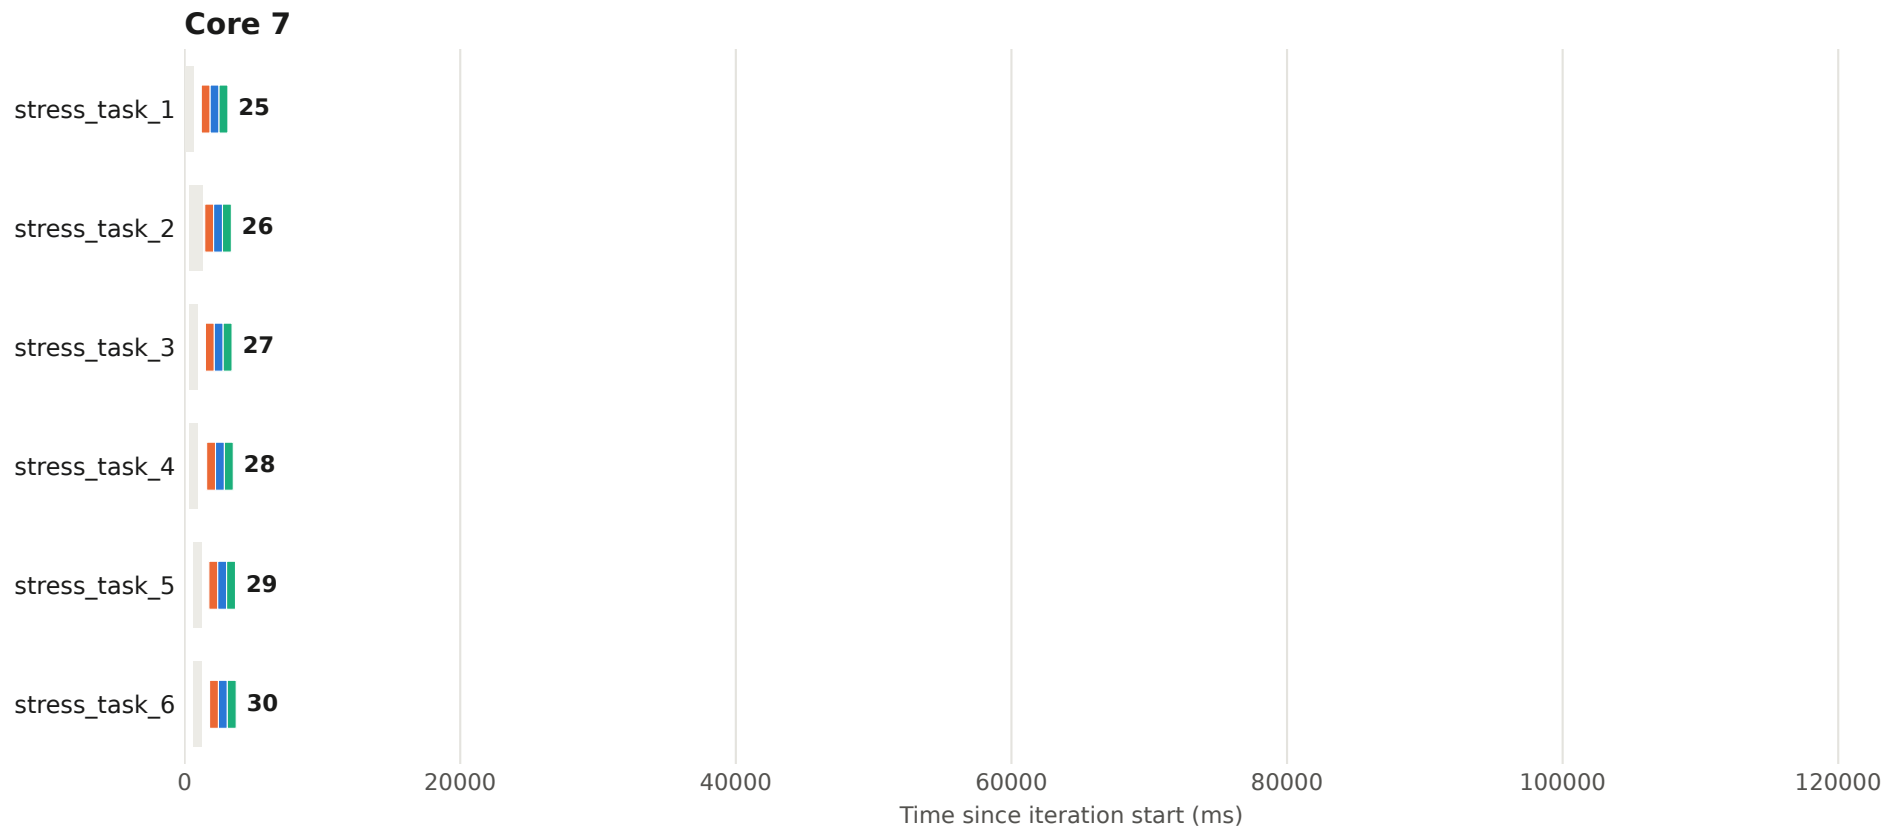


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 43 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

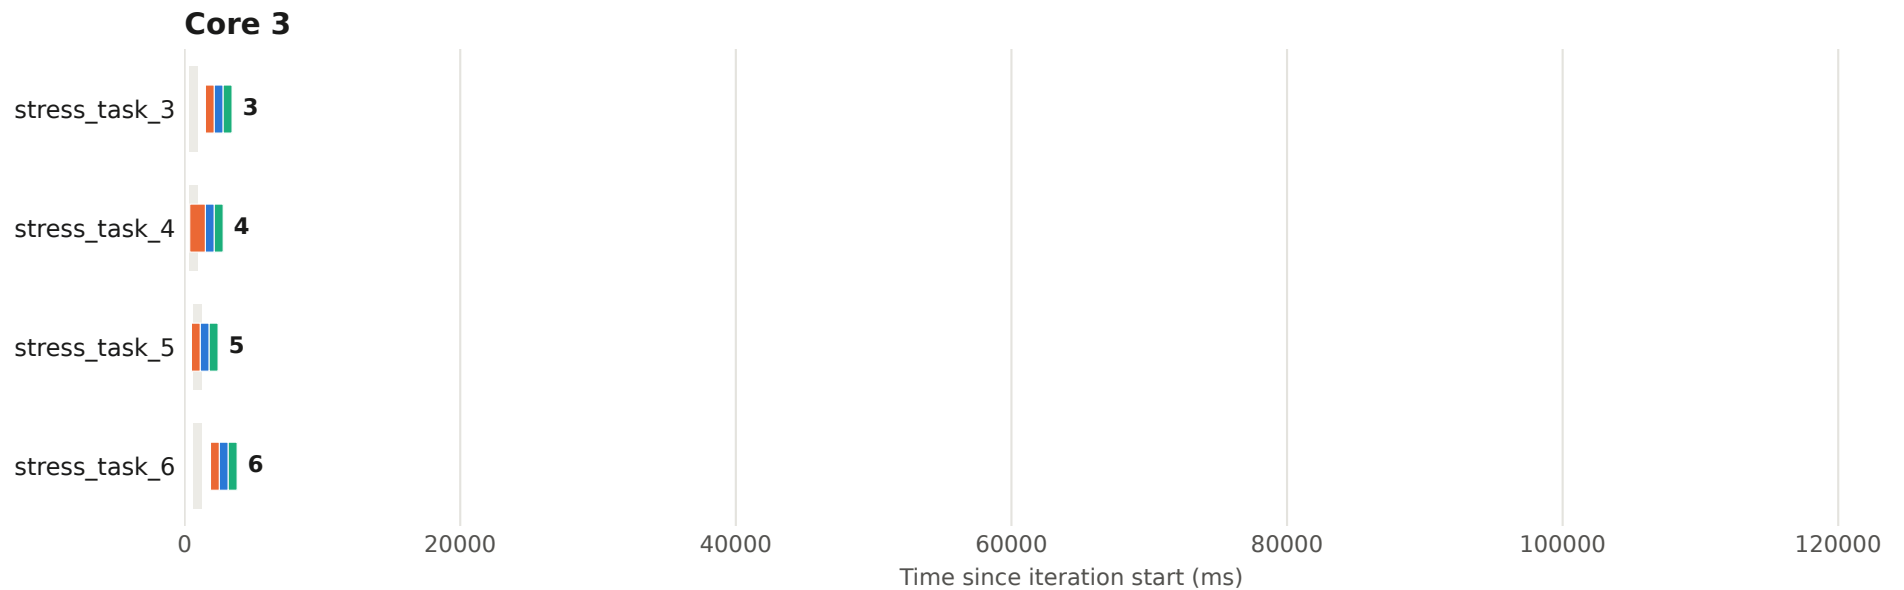


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 43 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

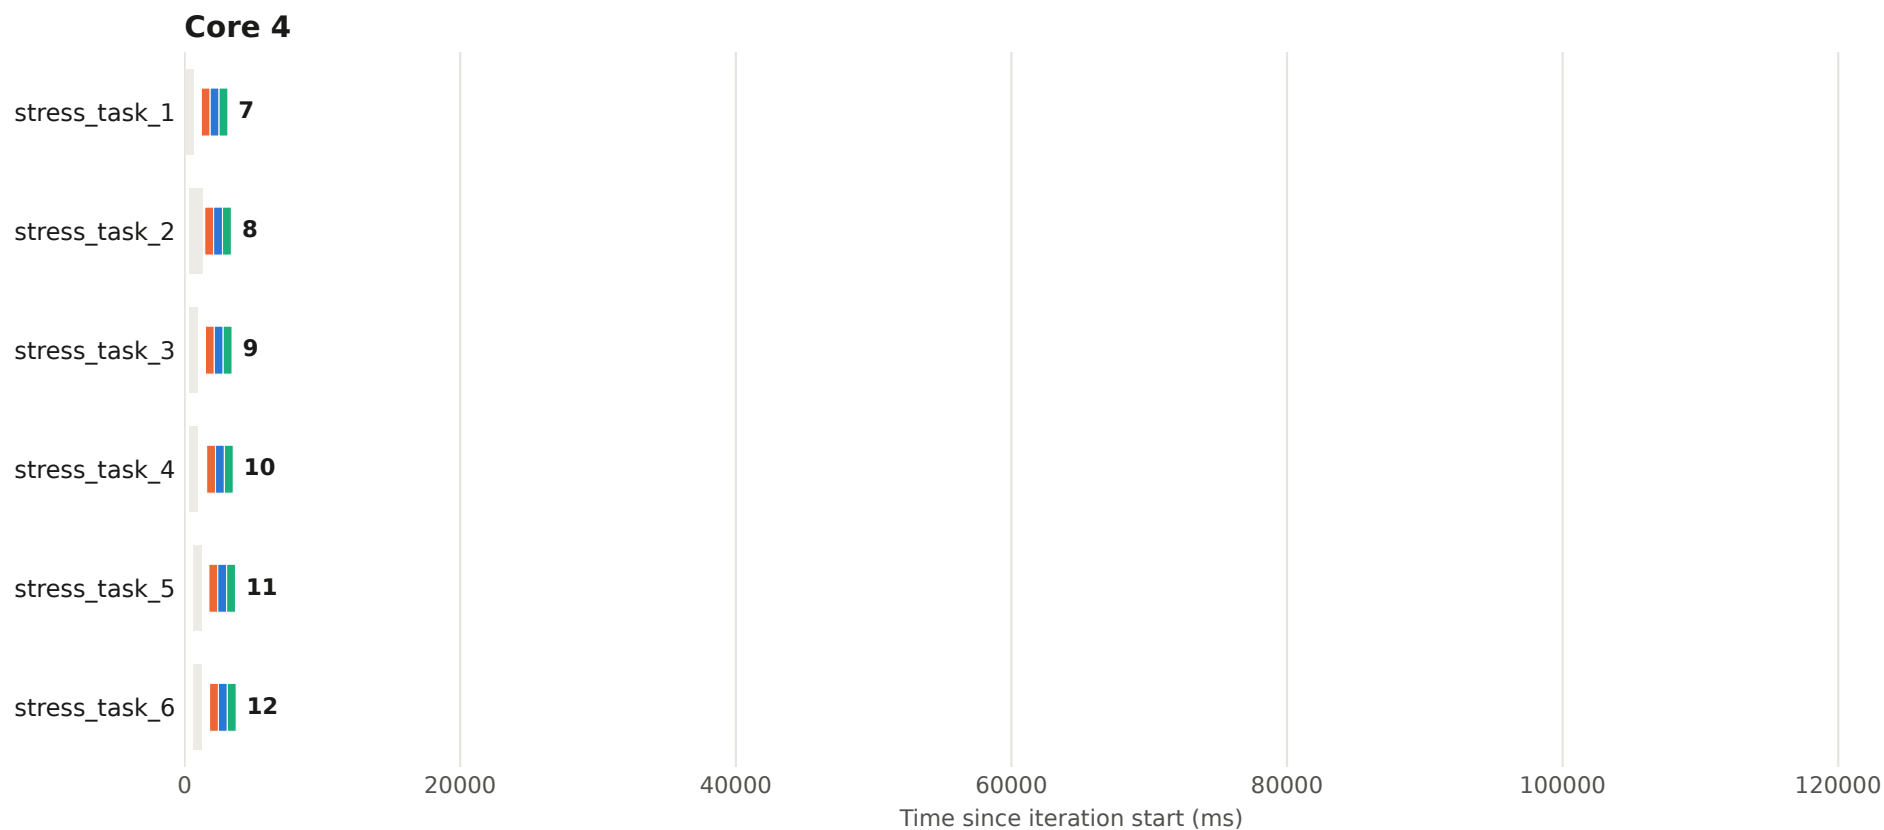


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 43 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

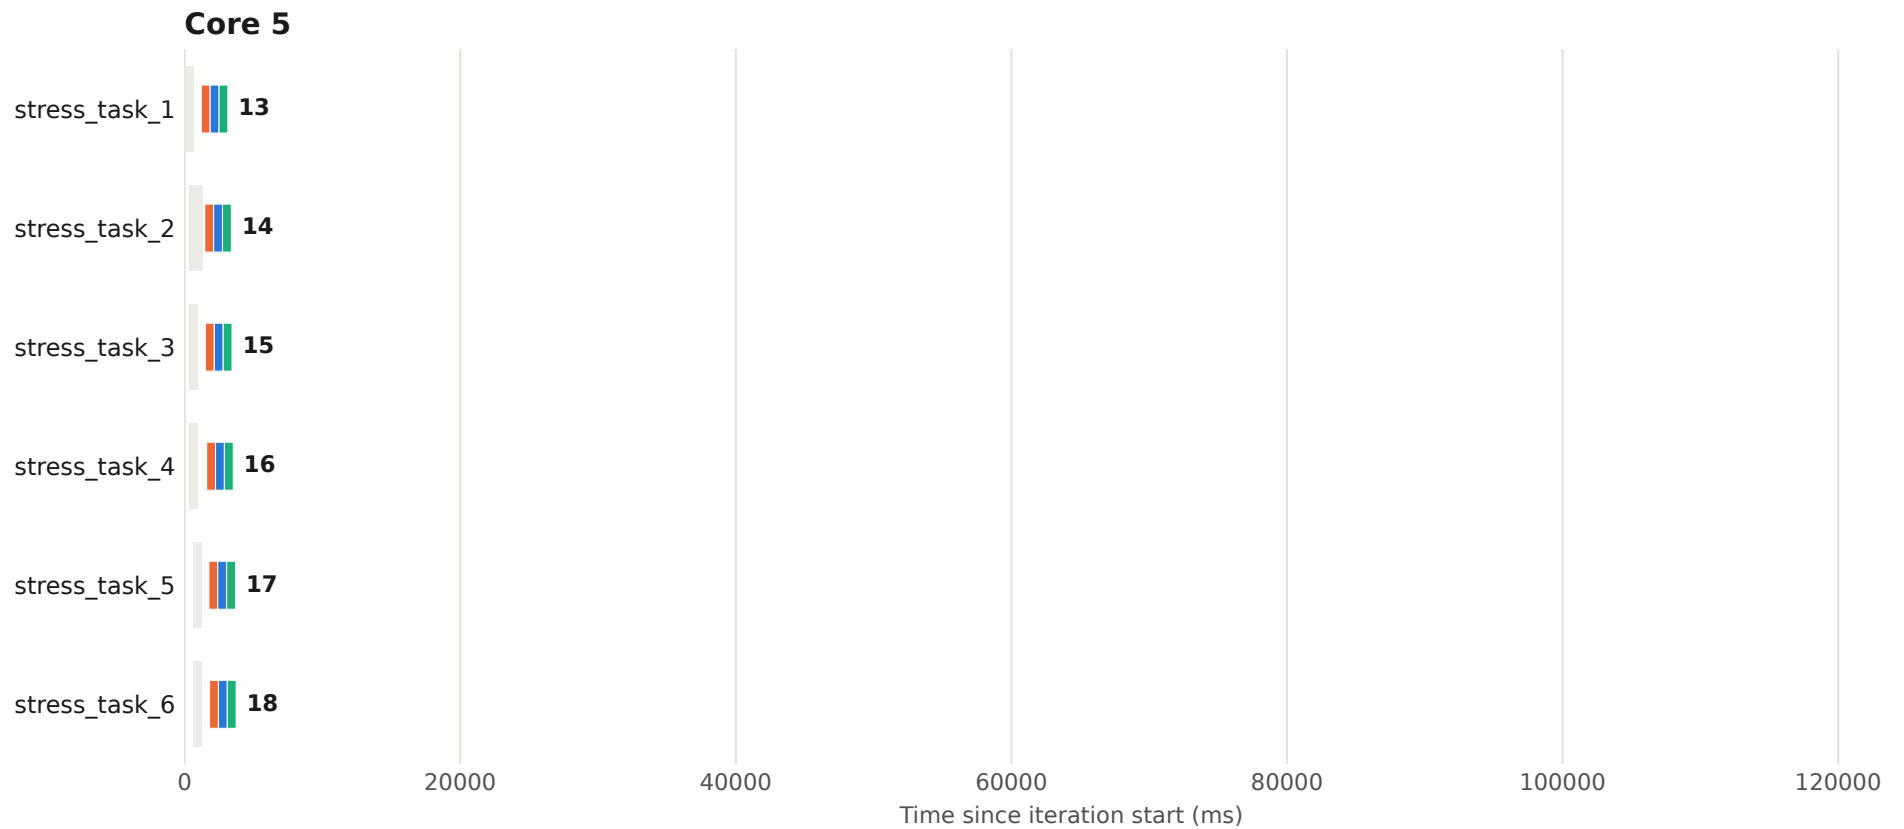


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 43 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

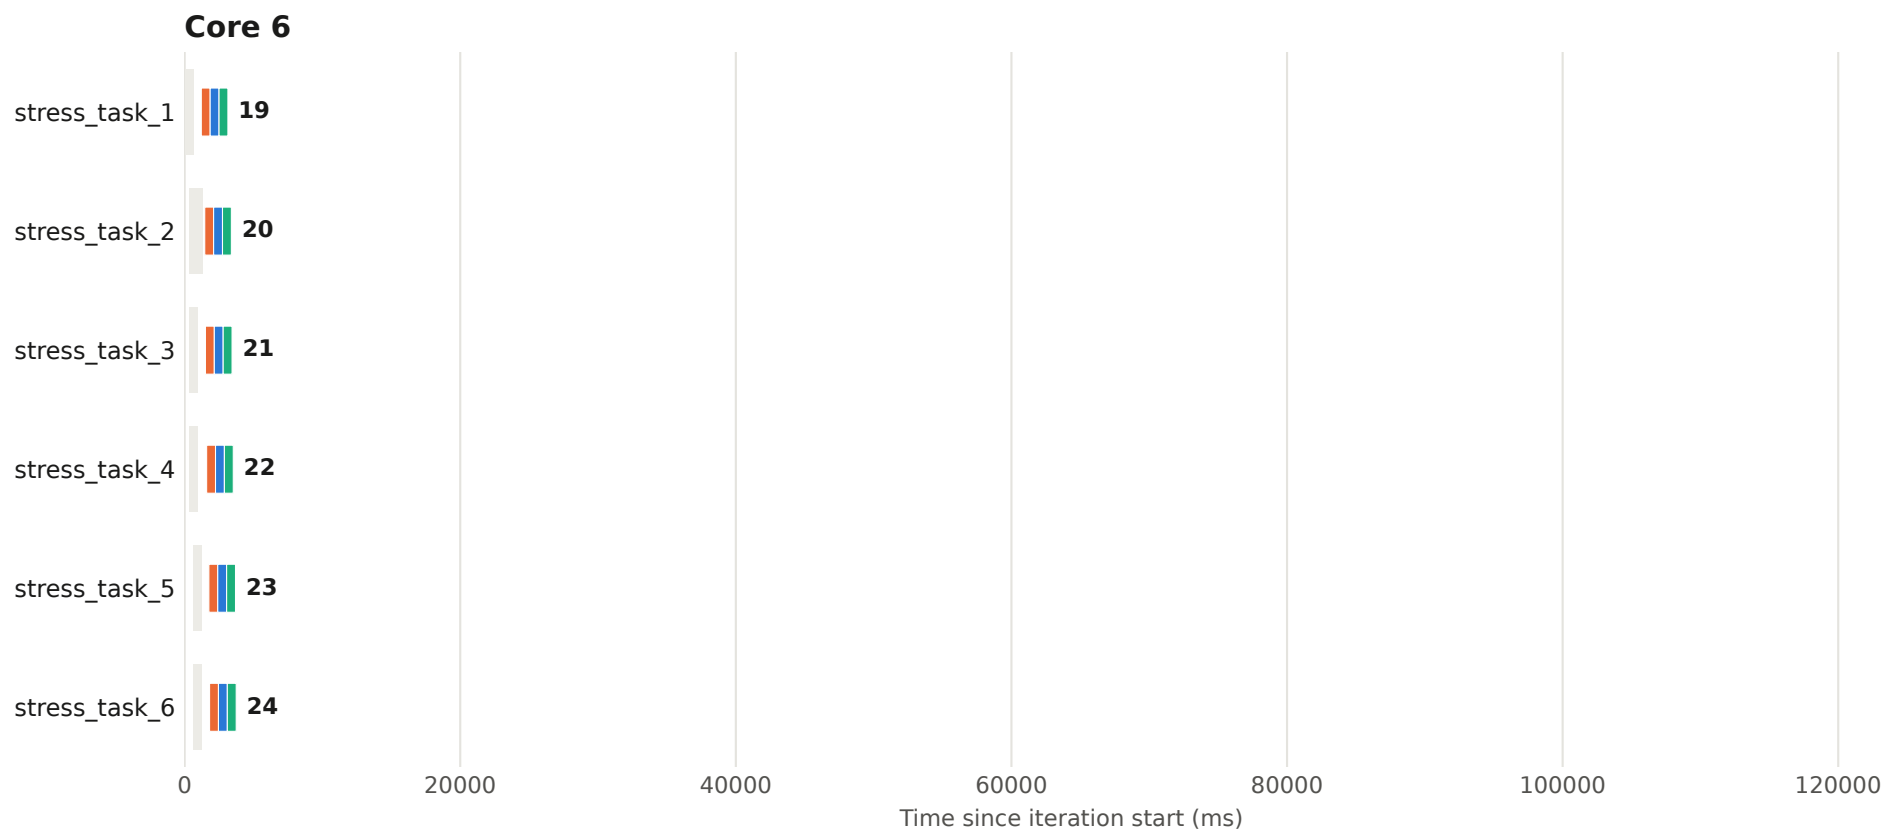


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 43 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

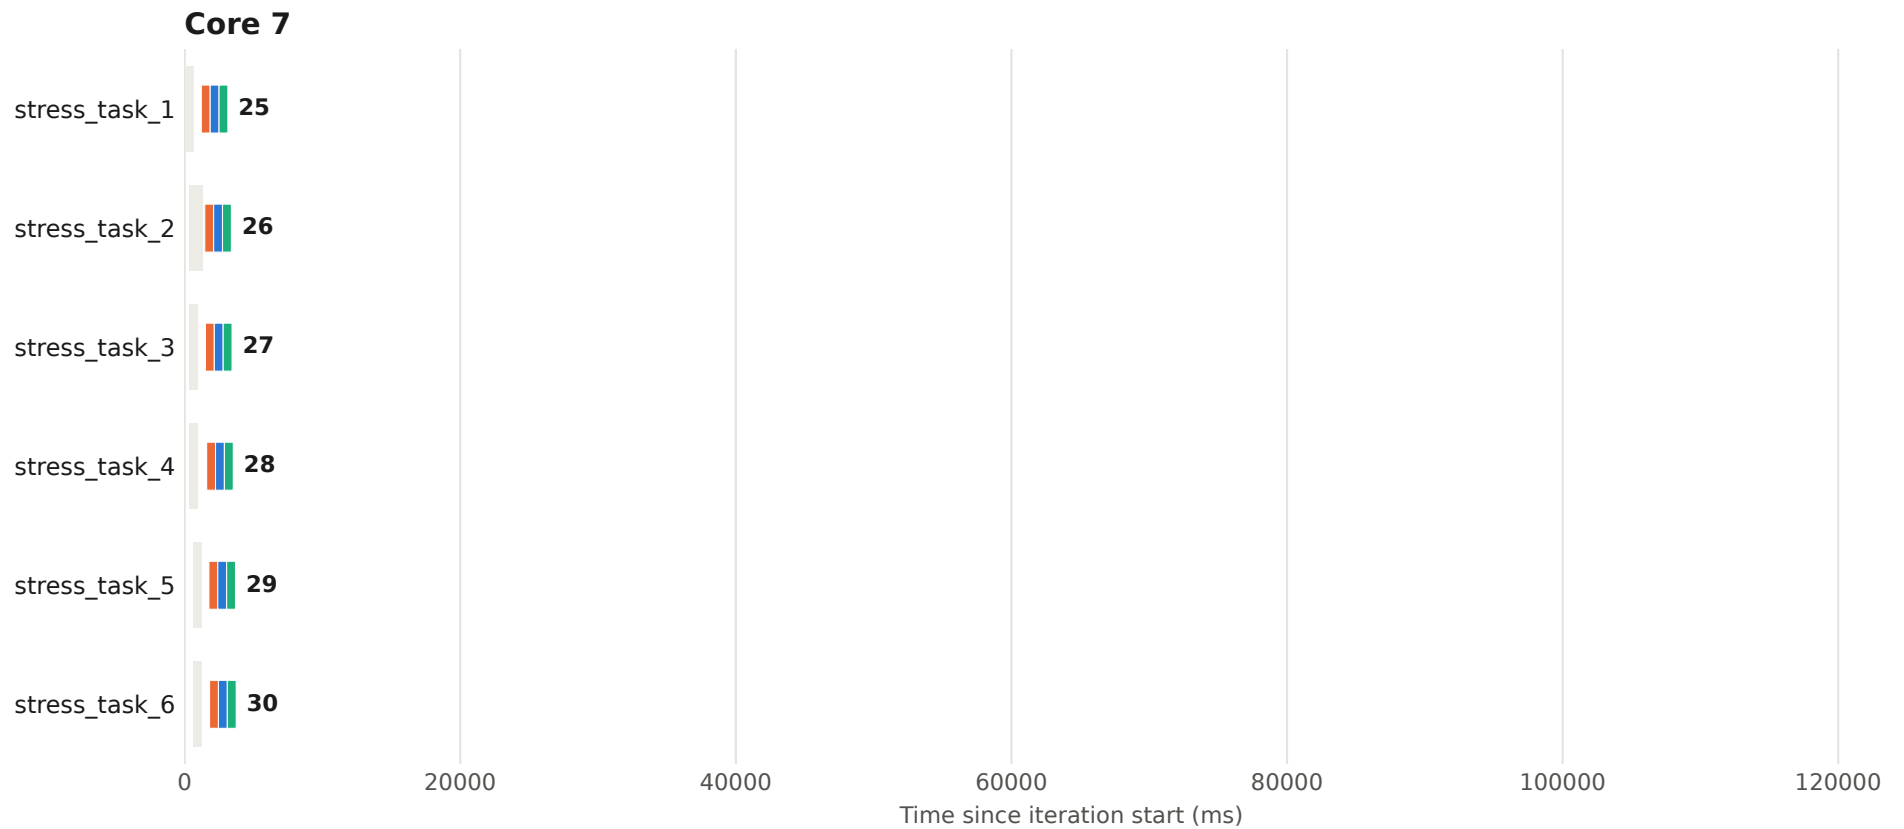


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 44 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

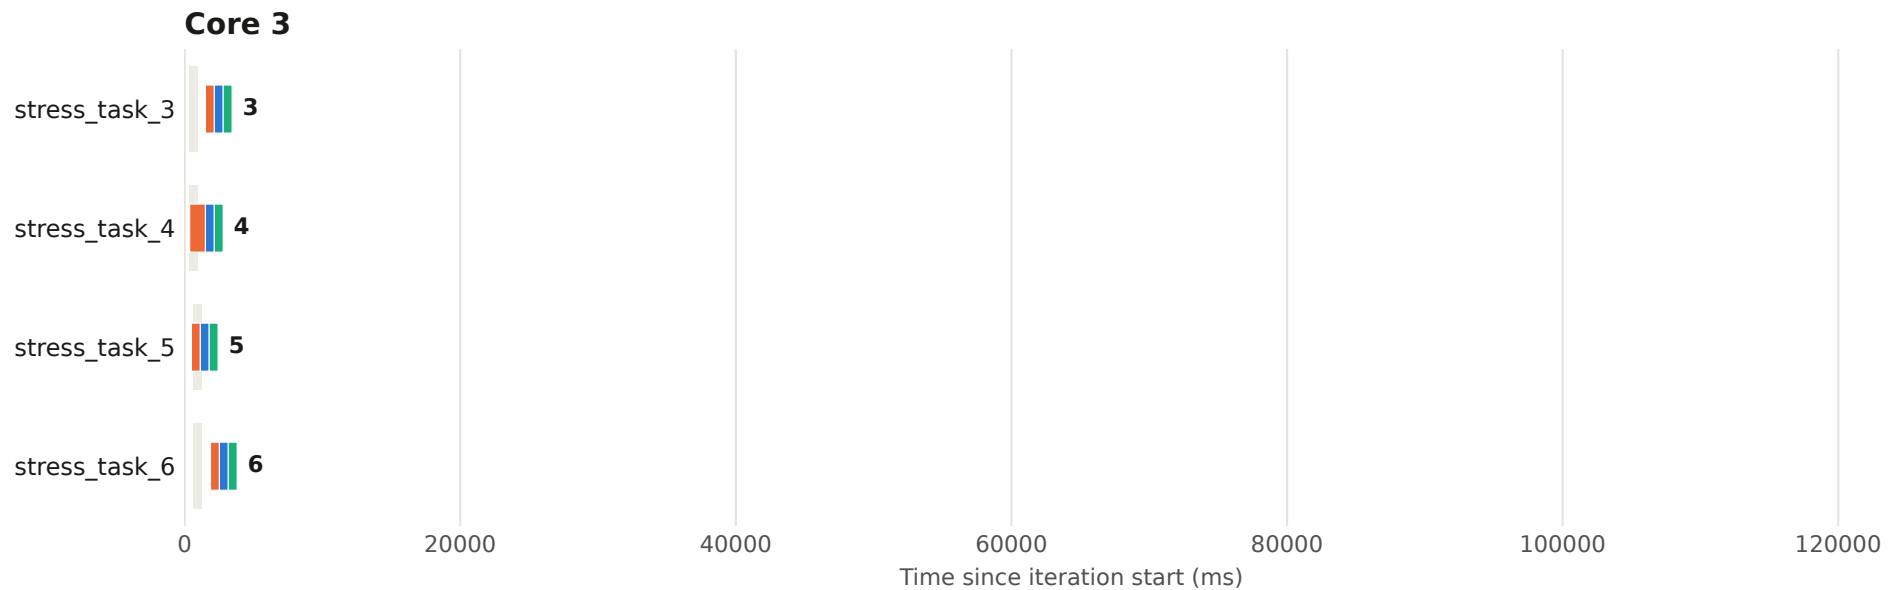

Execution plan - iteration 44 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

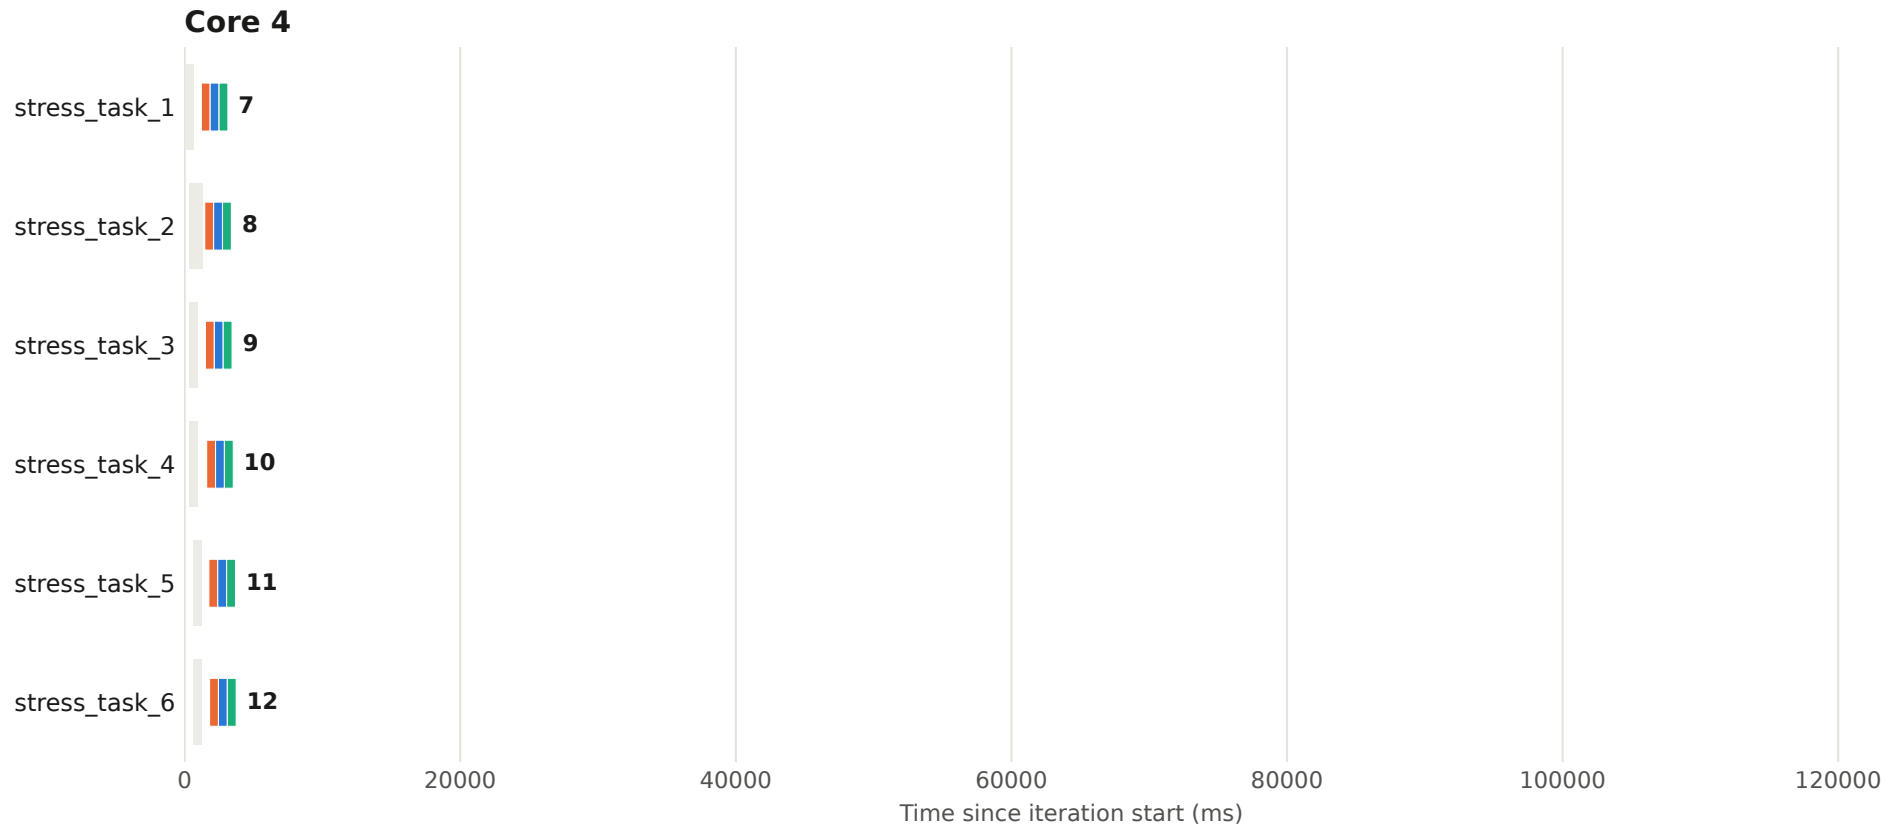


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 44 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

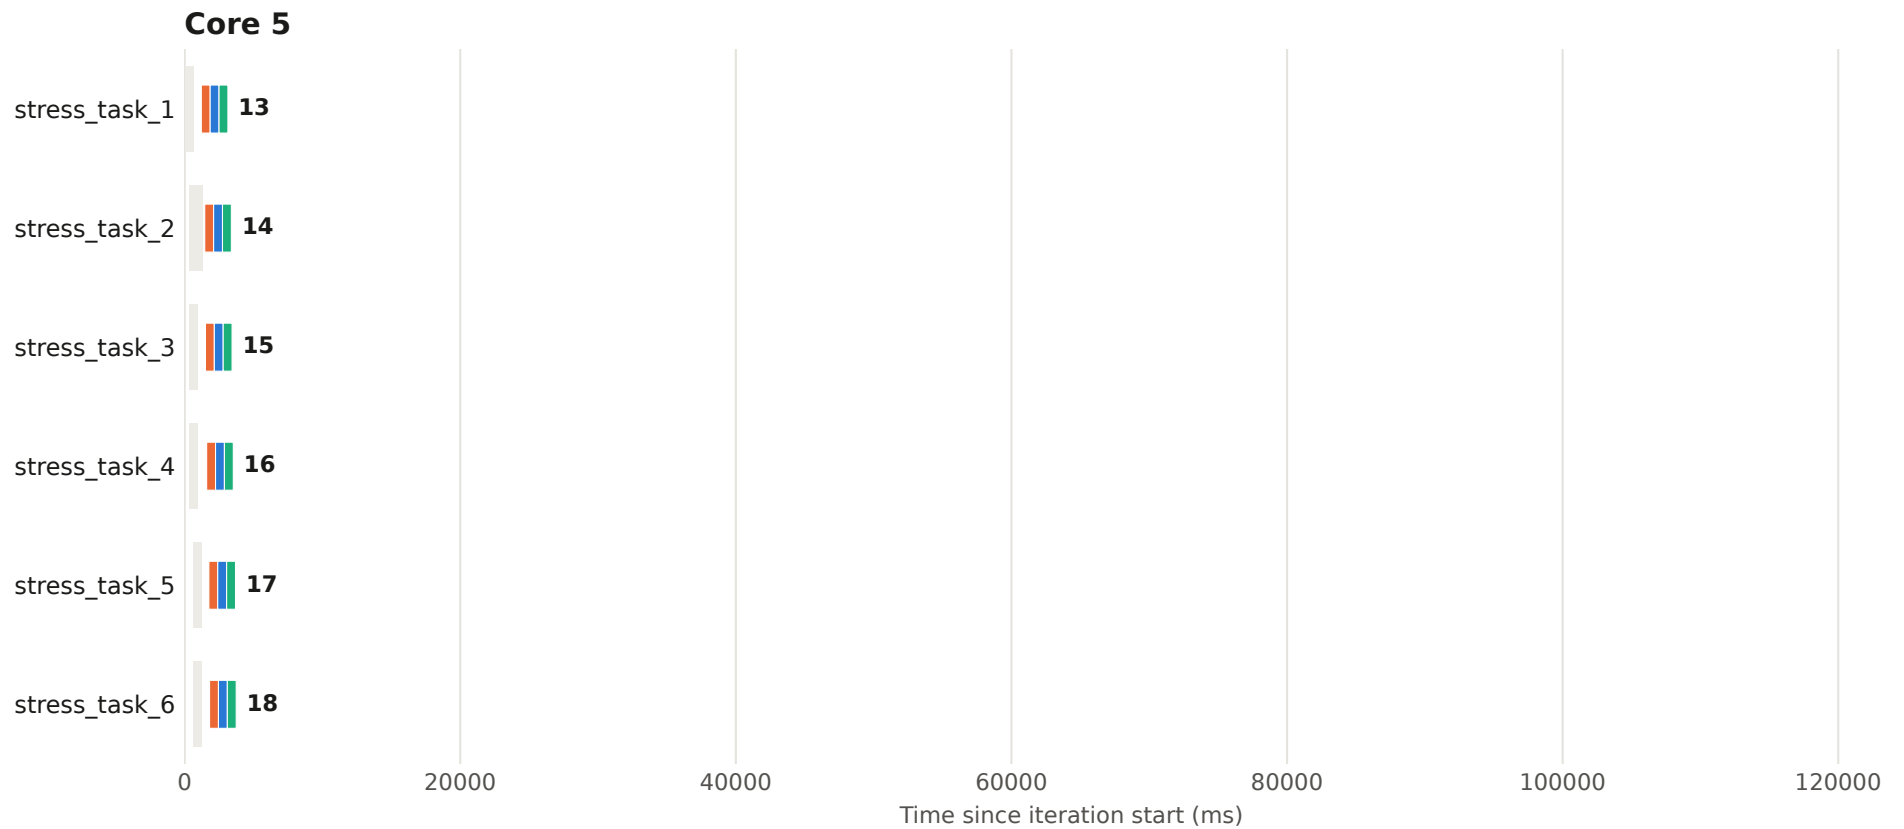


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 44 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

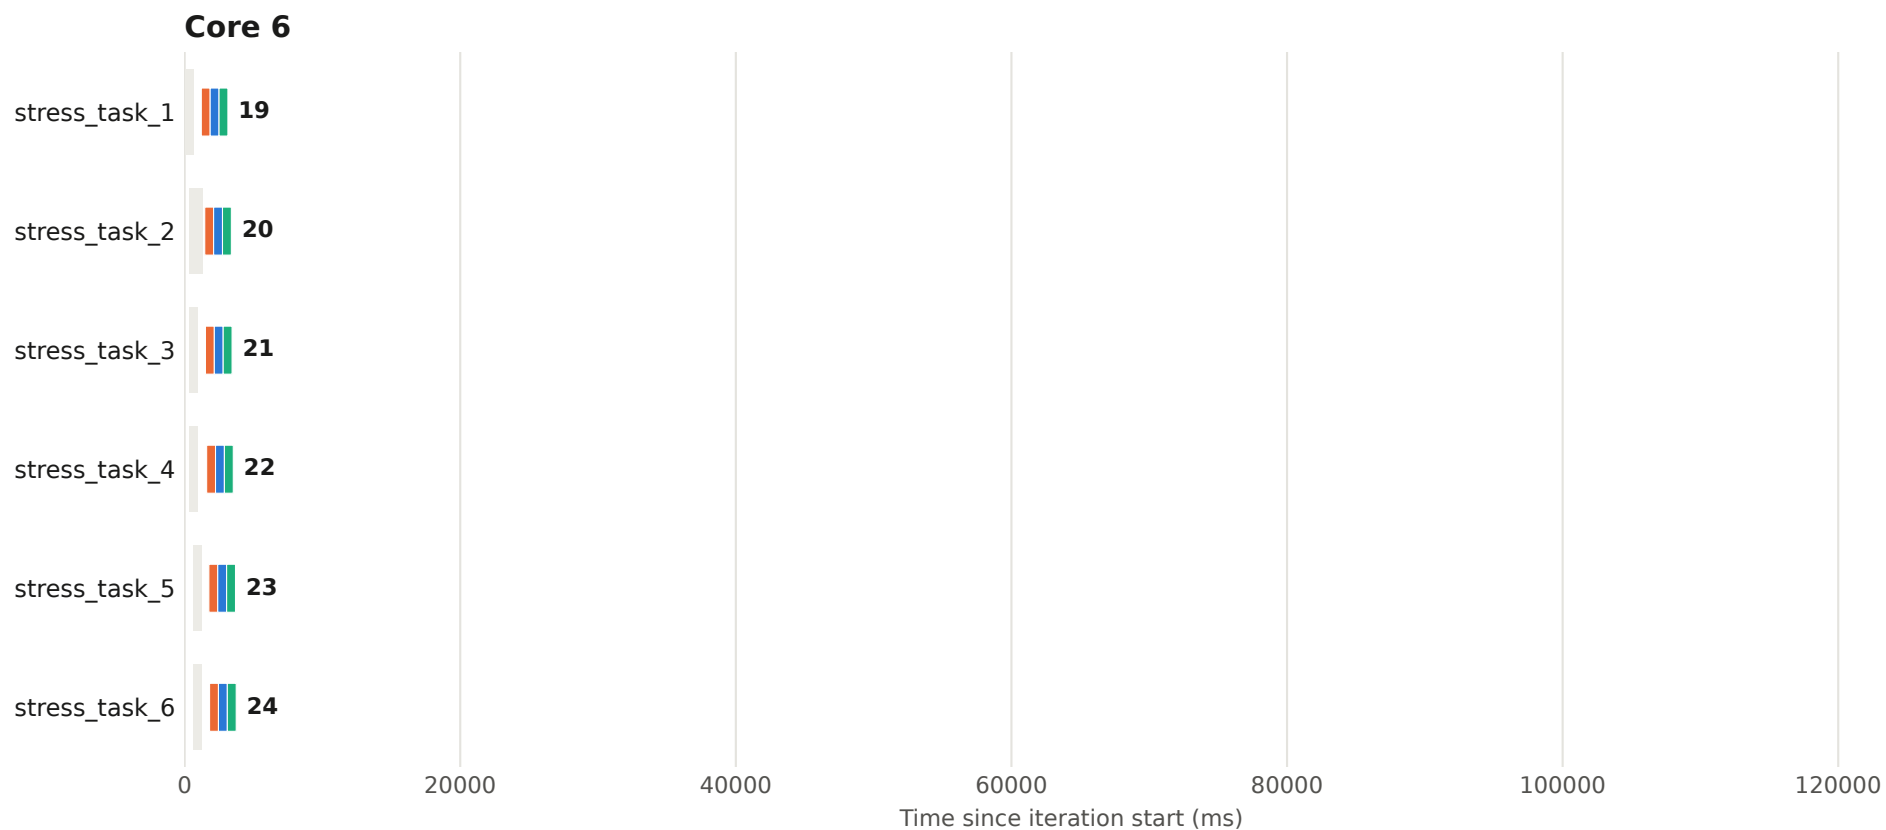


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 44 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

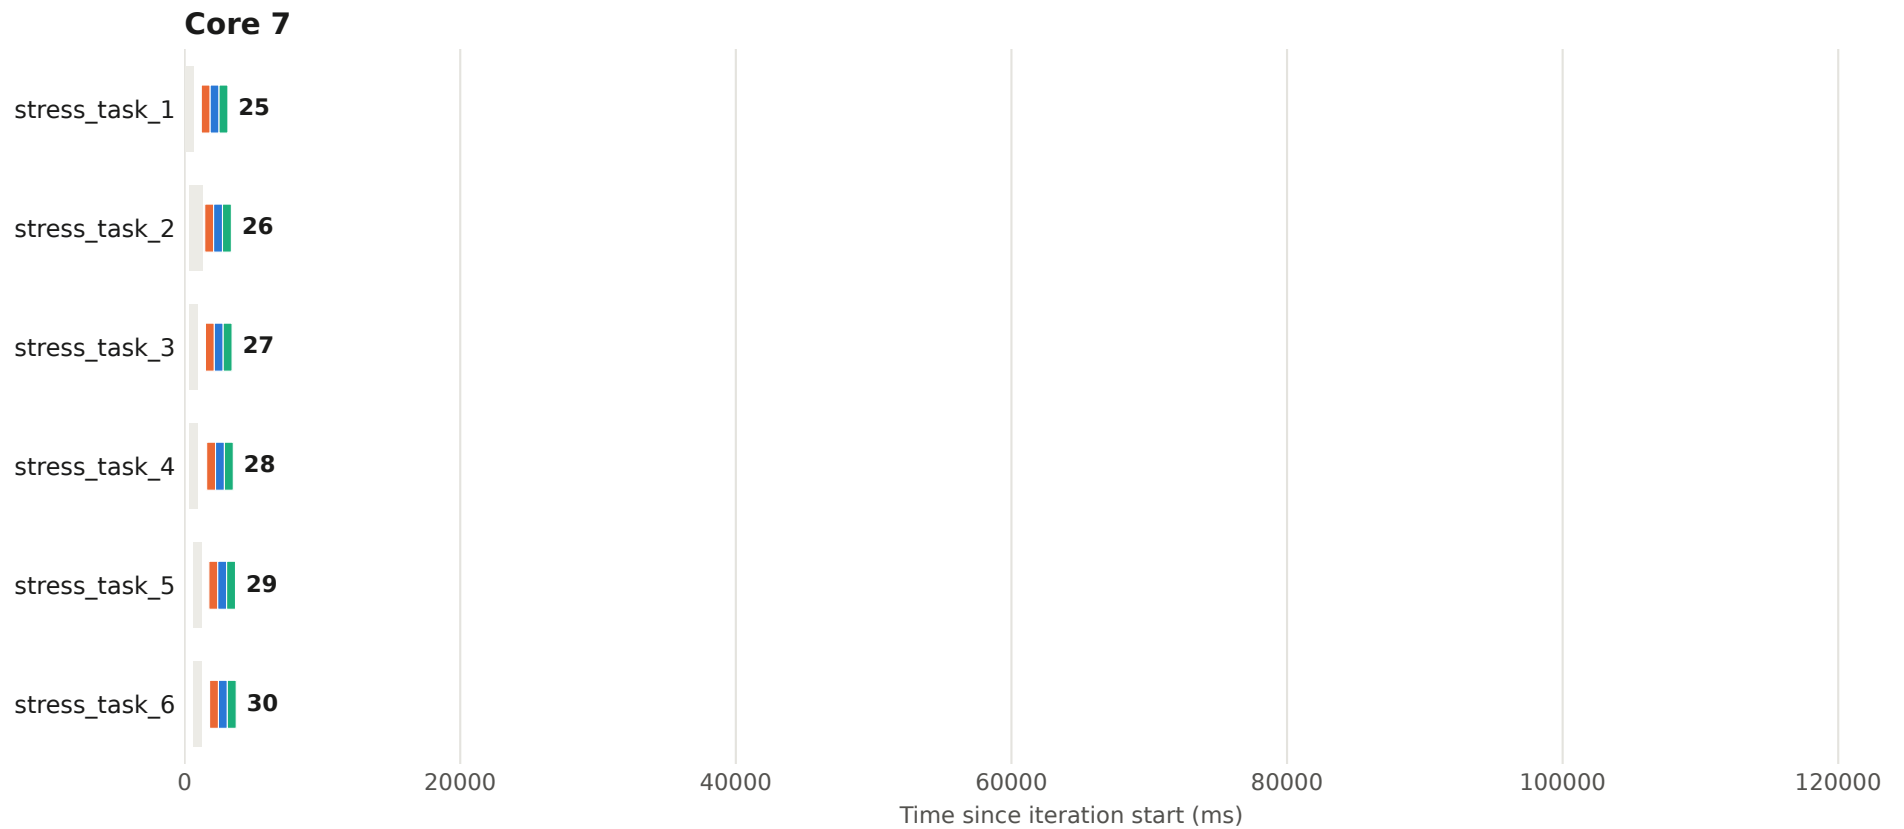


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 45 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

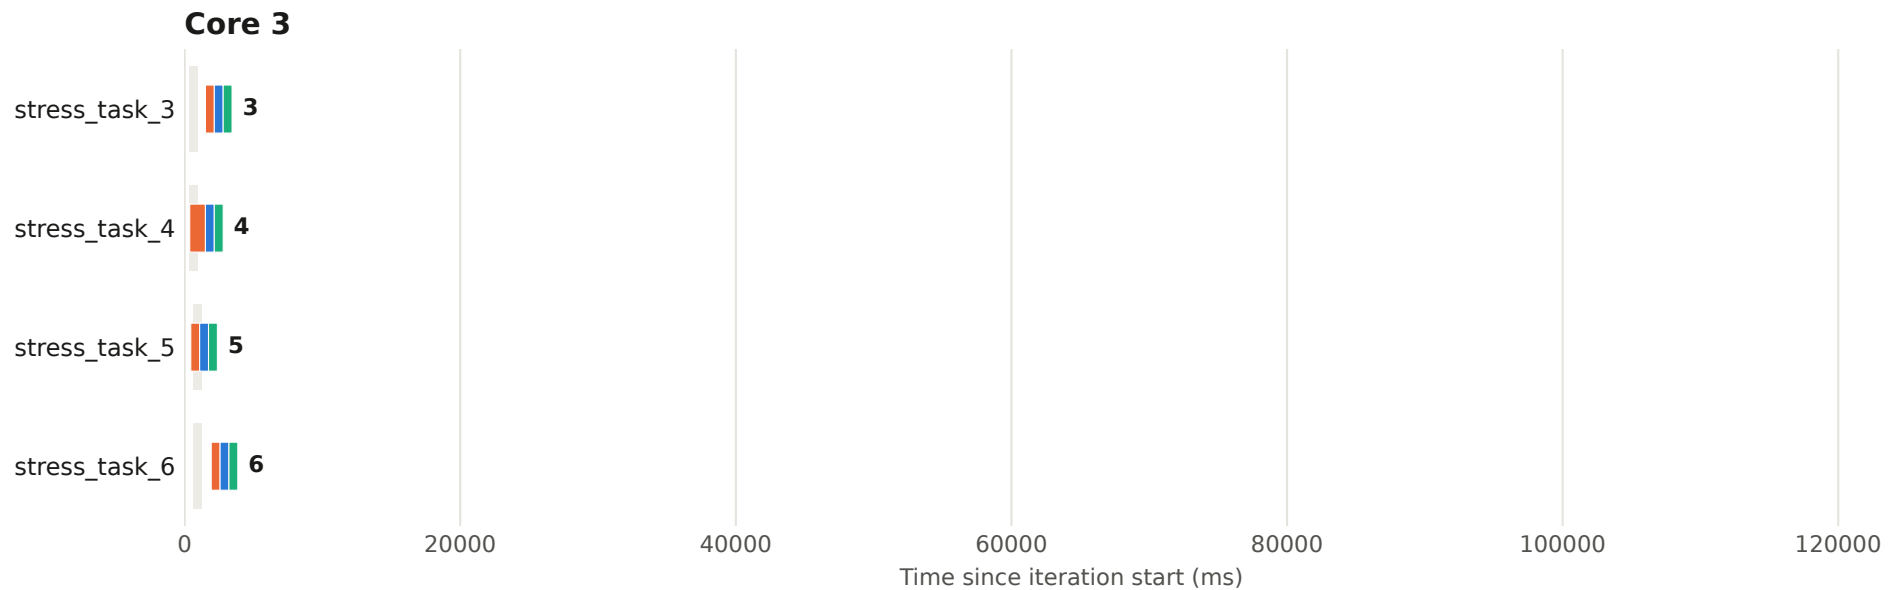

Execution plan - iteration 45 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

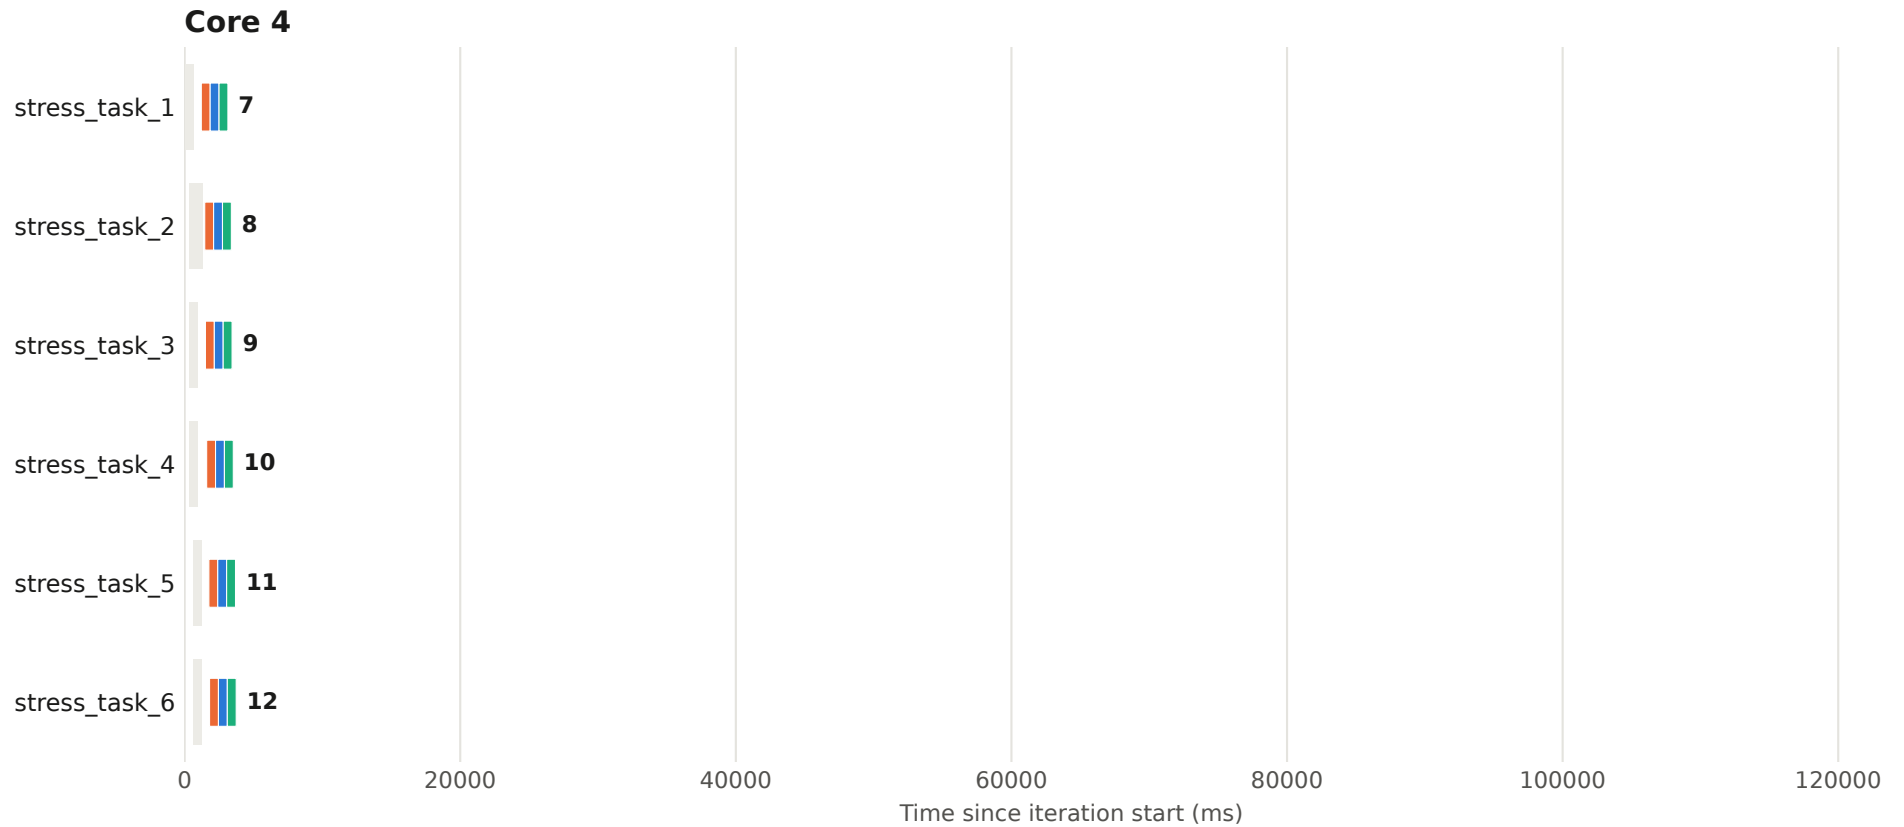


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 45 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

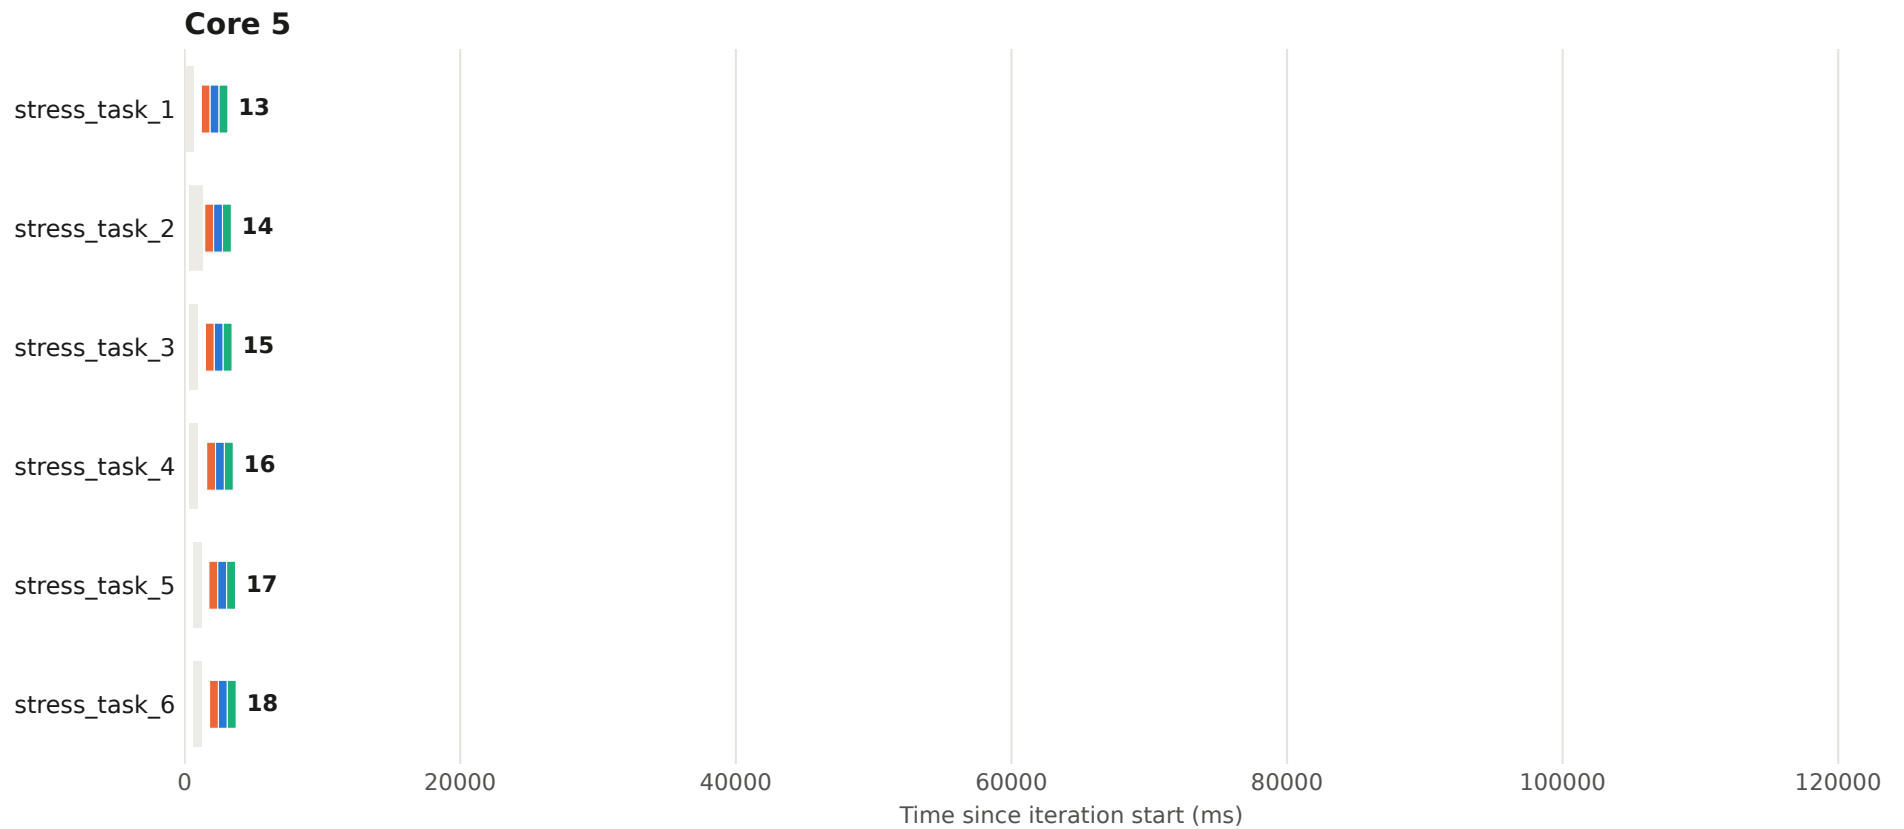


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 45 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

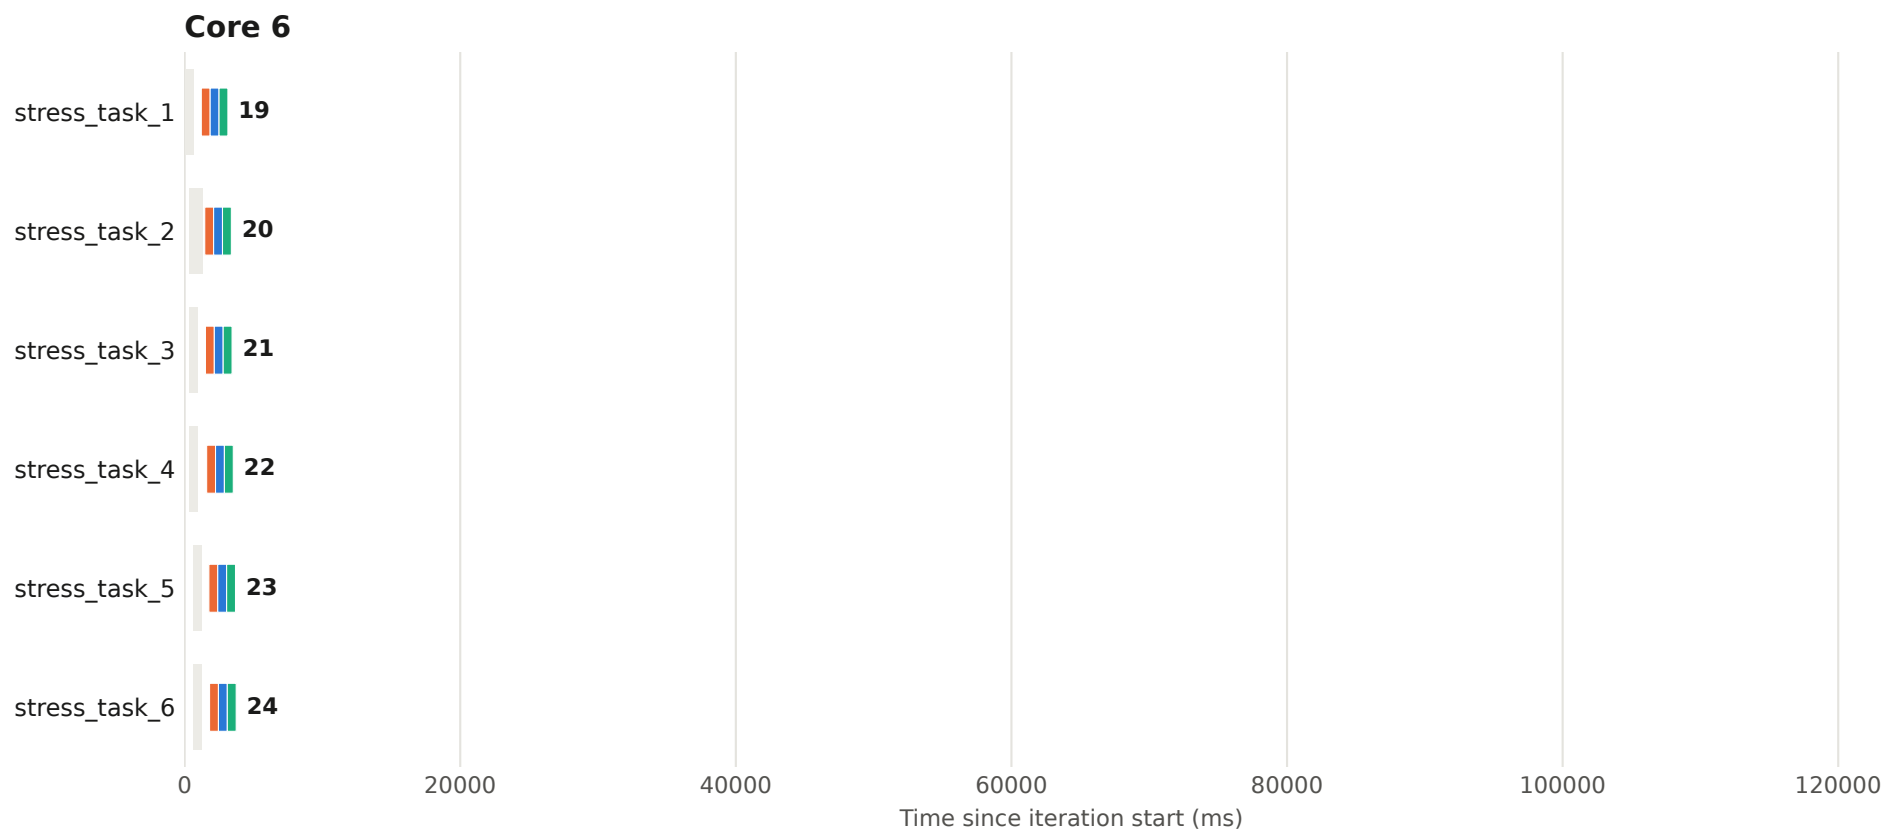


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 45 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

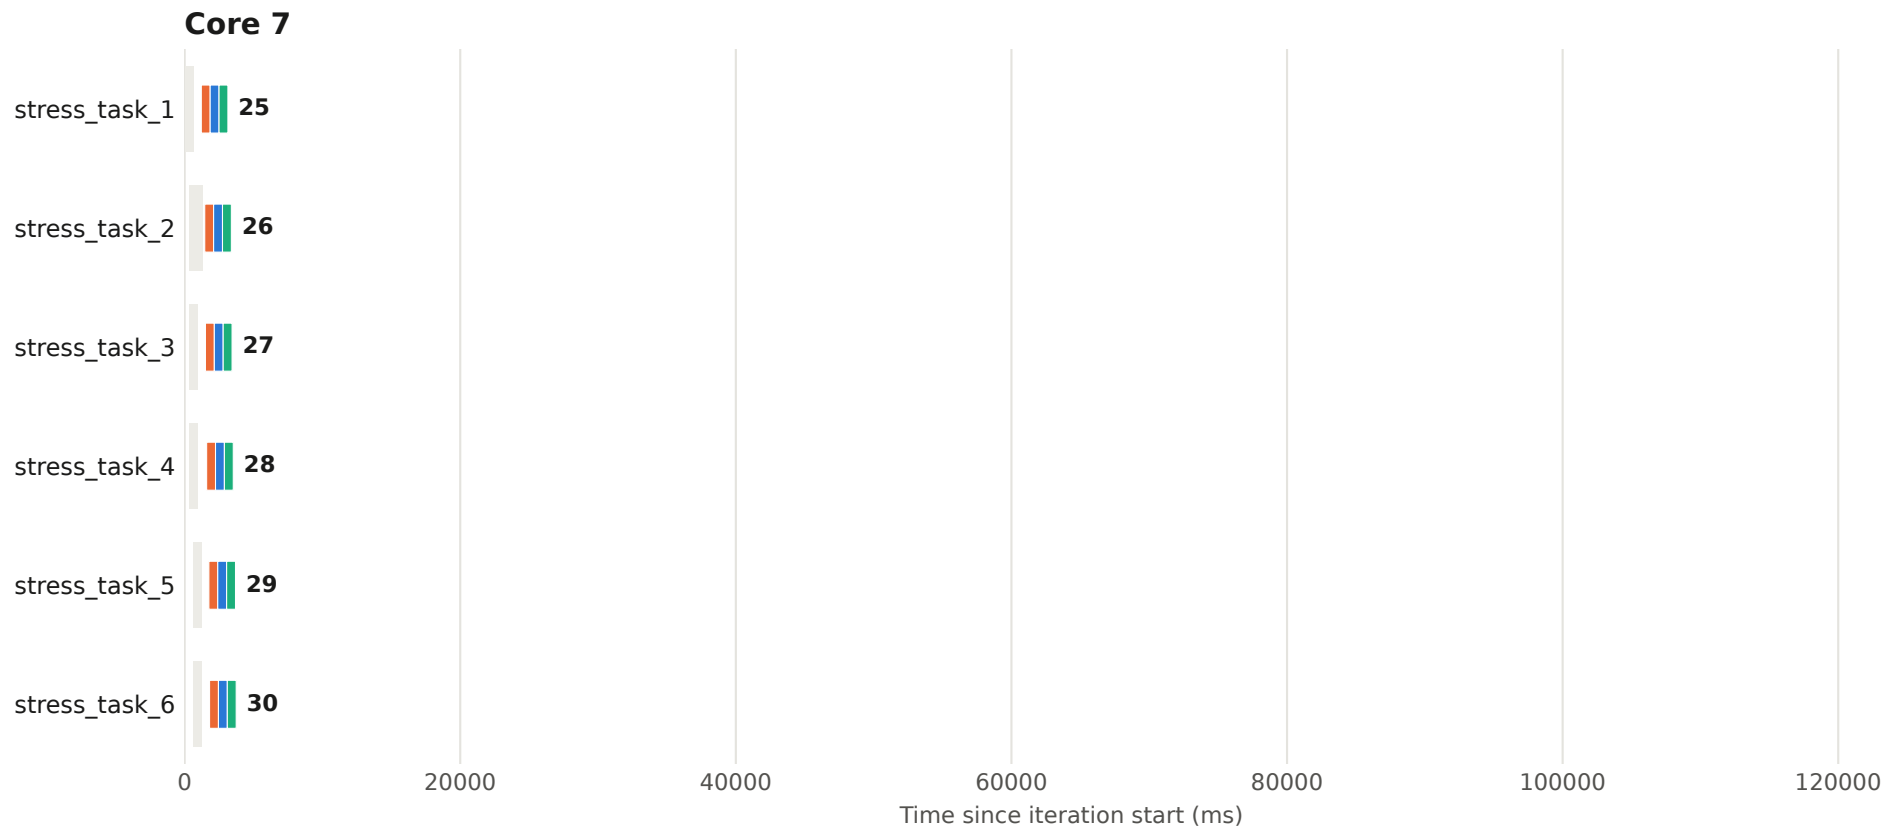


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 46 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

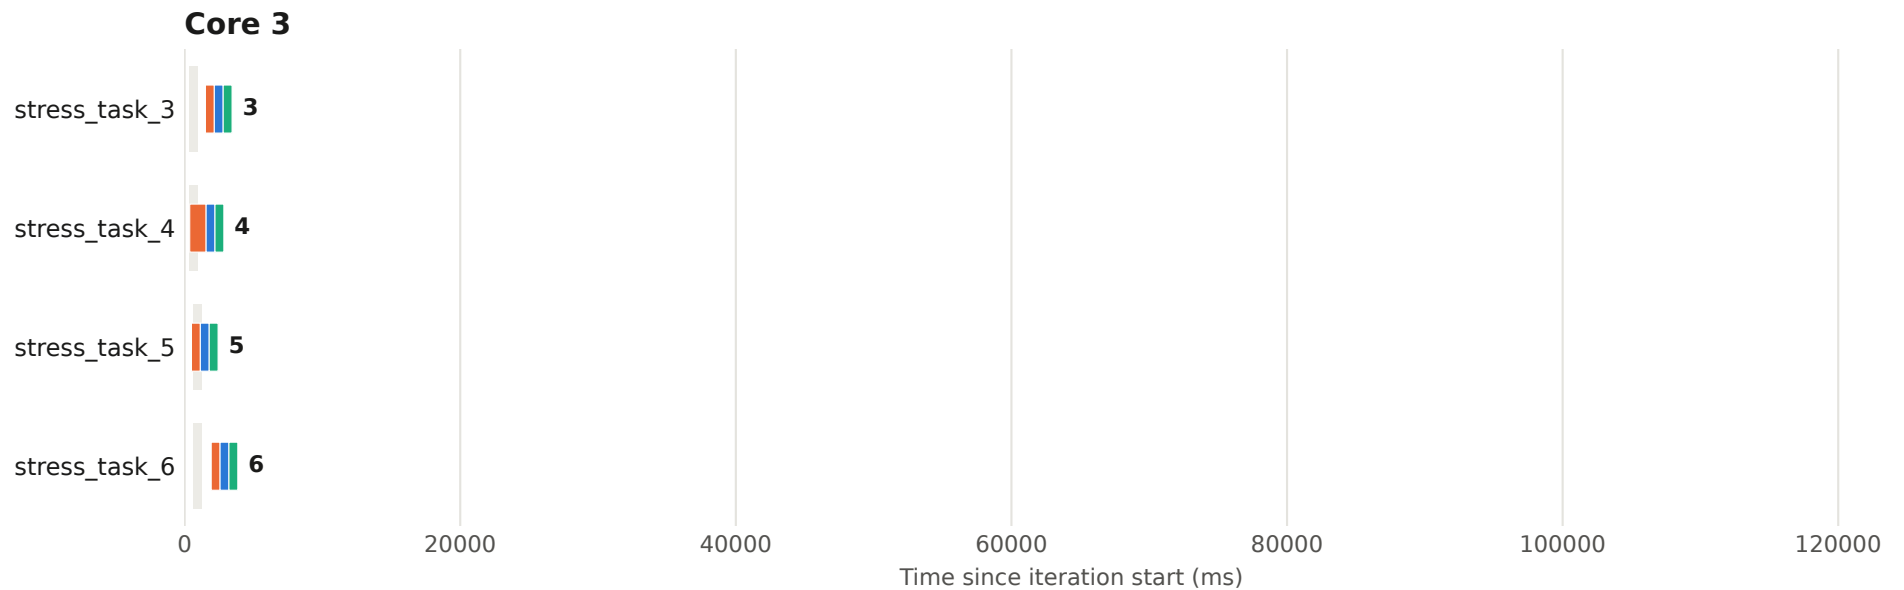

Execution plan - iteration 46 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

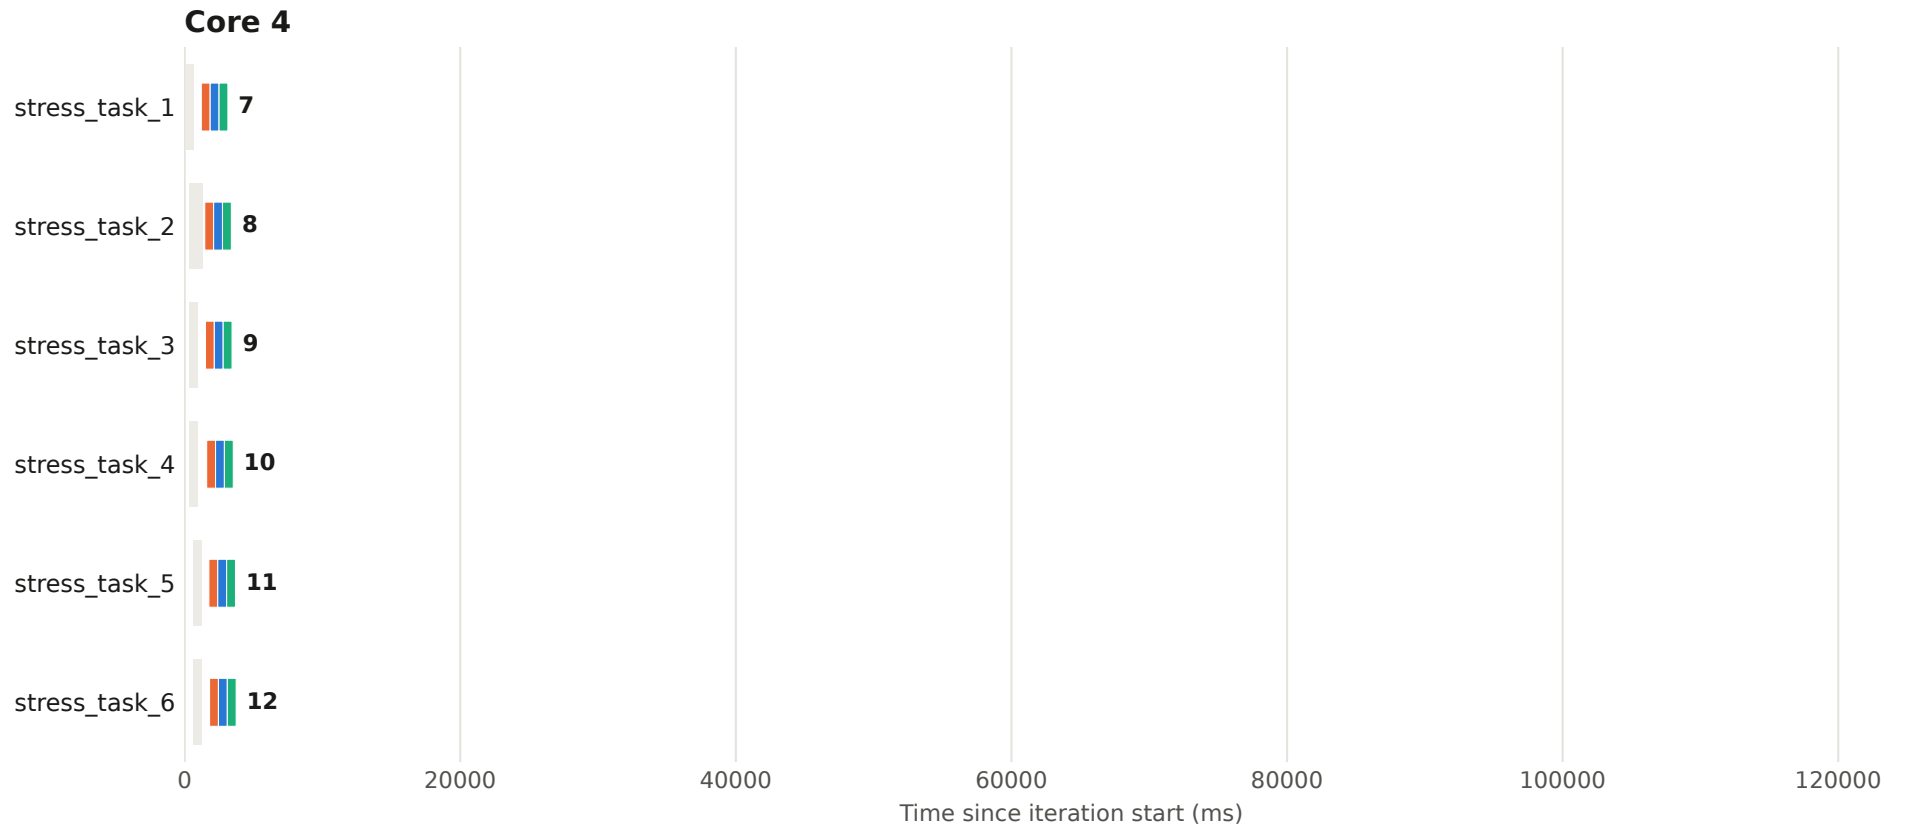


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 46 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

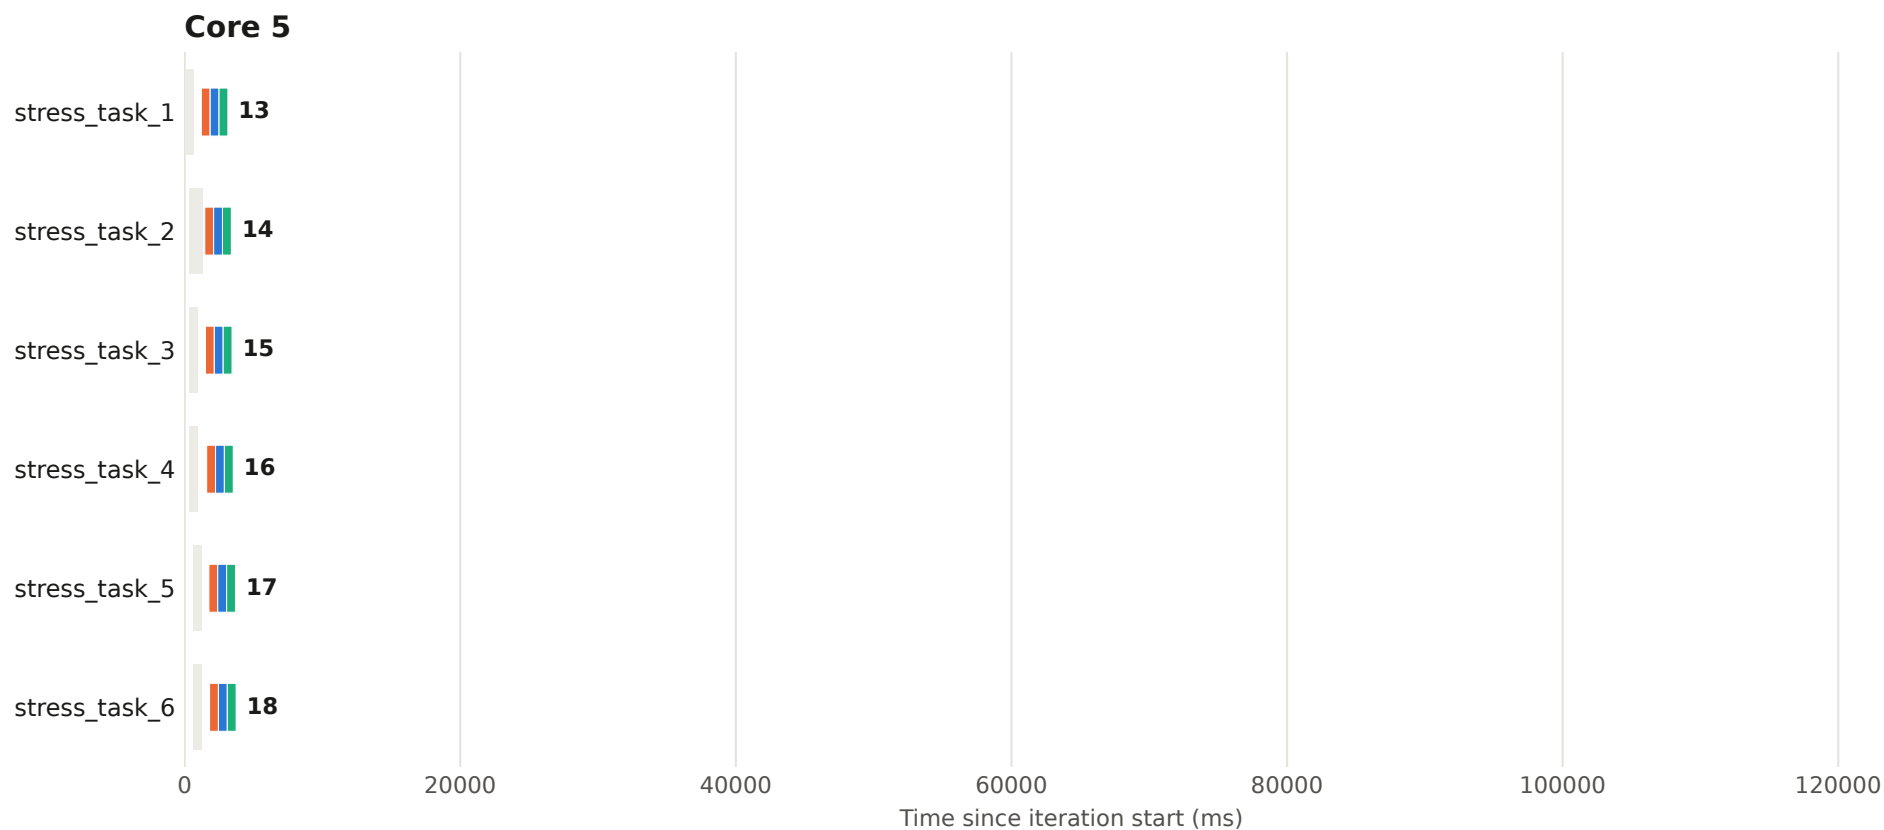


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 46 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

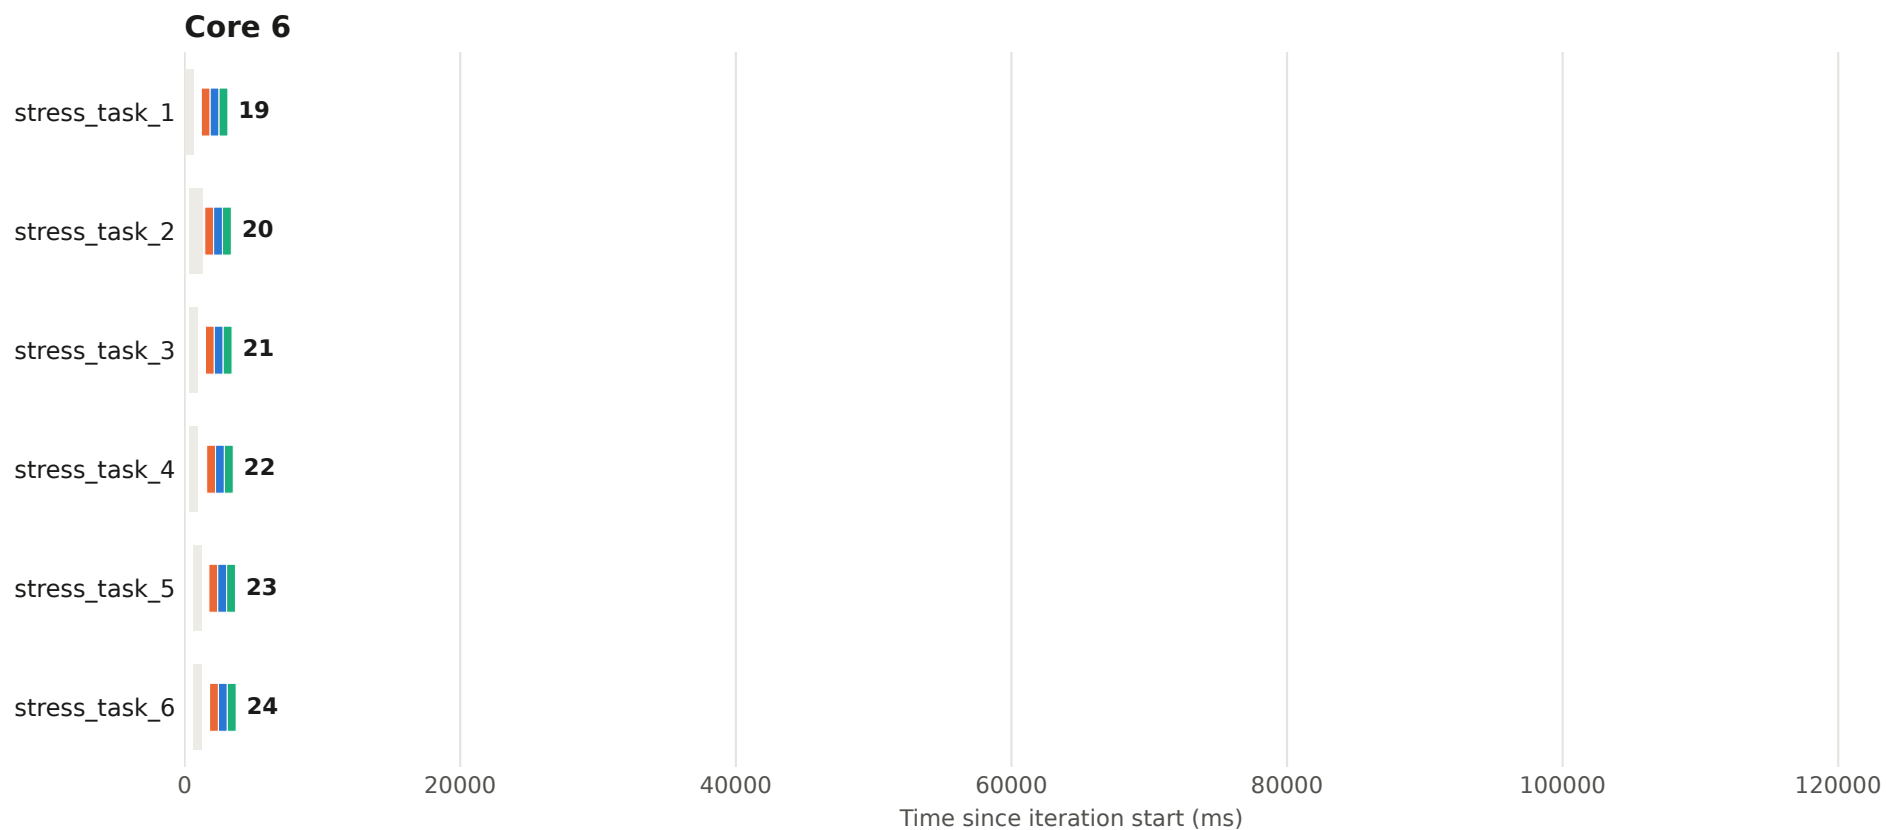


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 46 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

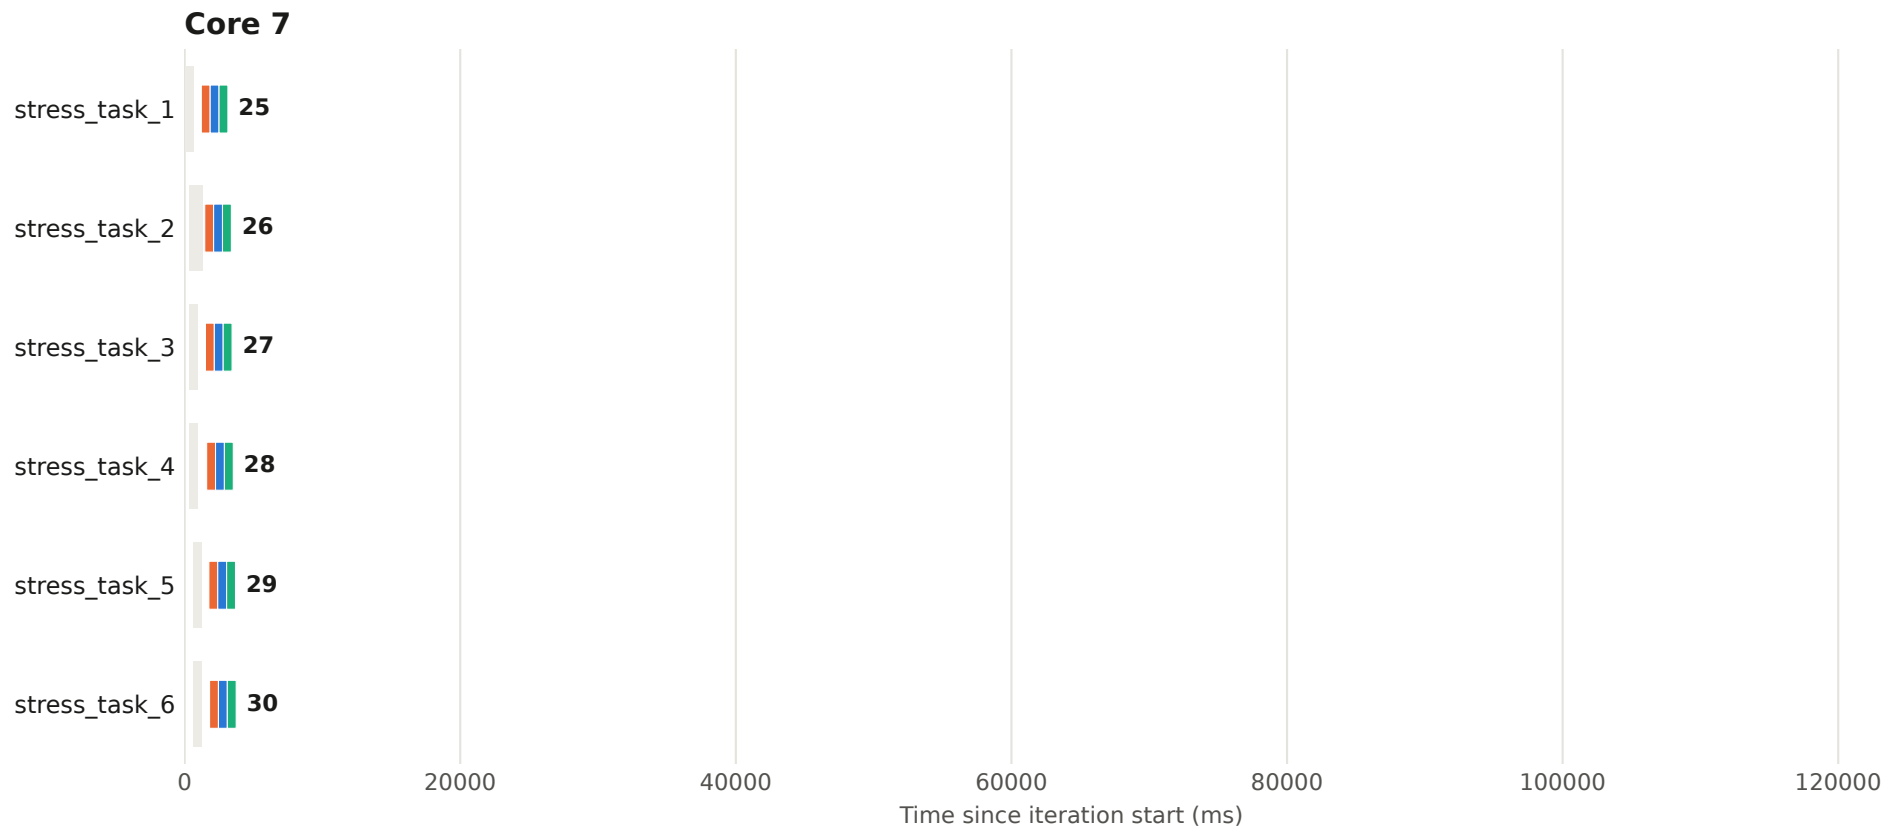


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 47 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

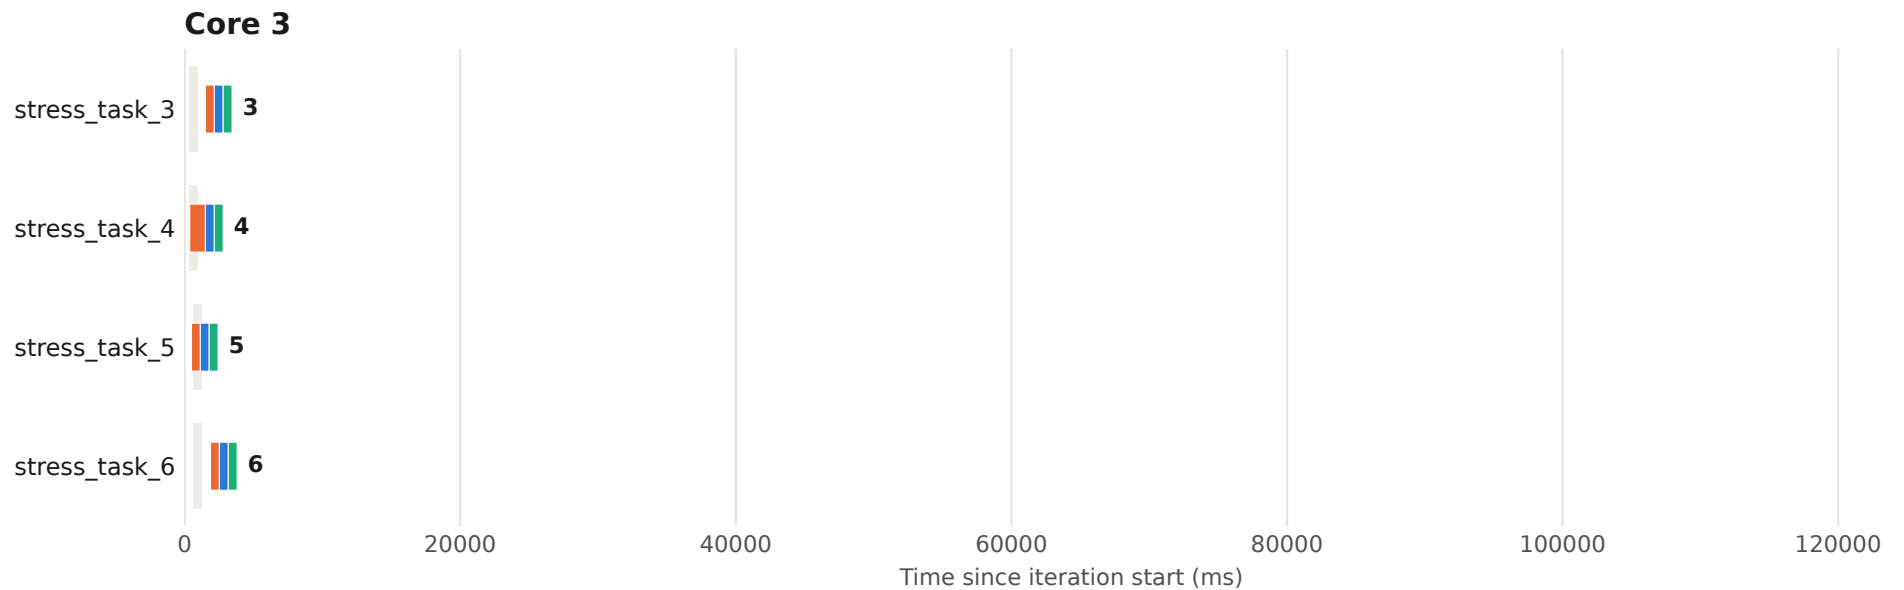

Execution plan - iteration 47 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

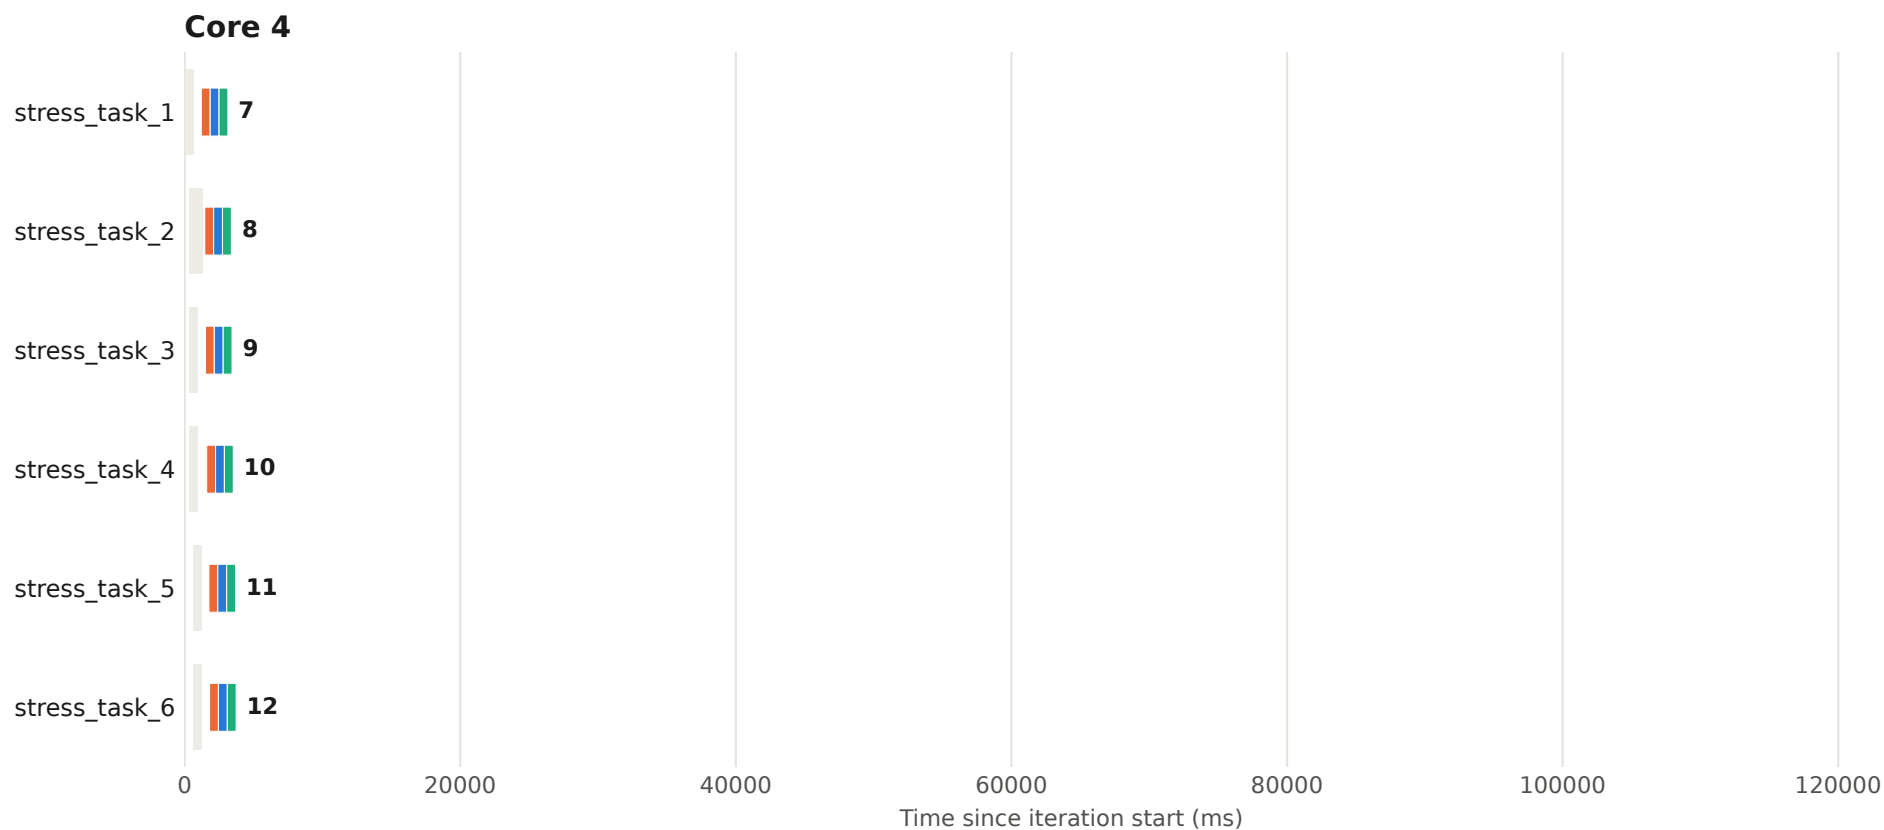


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 47 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

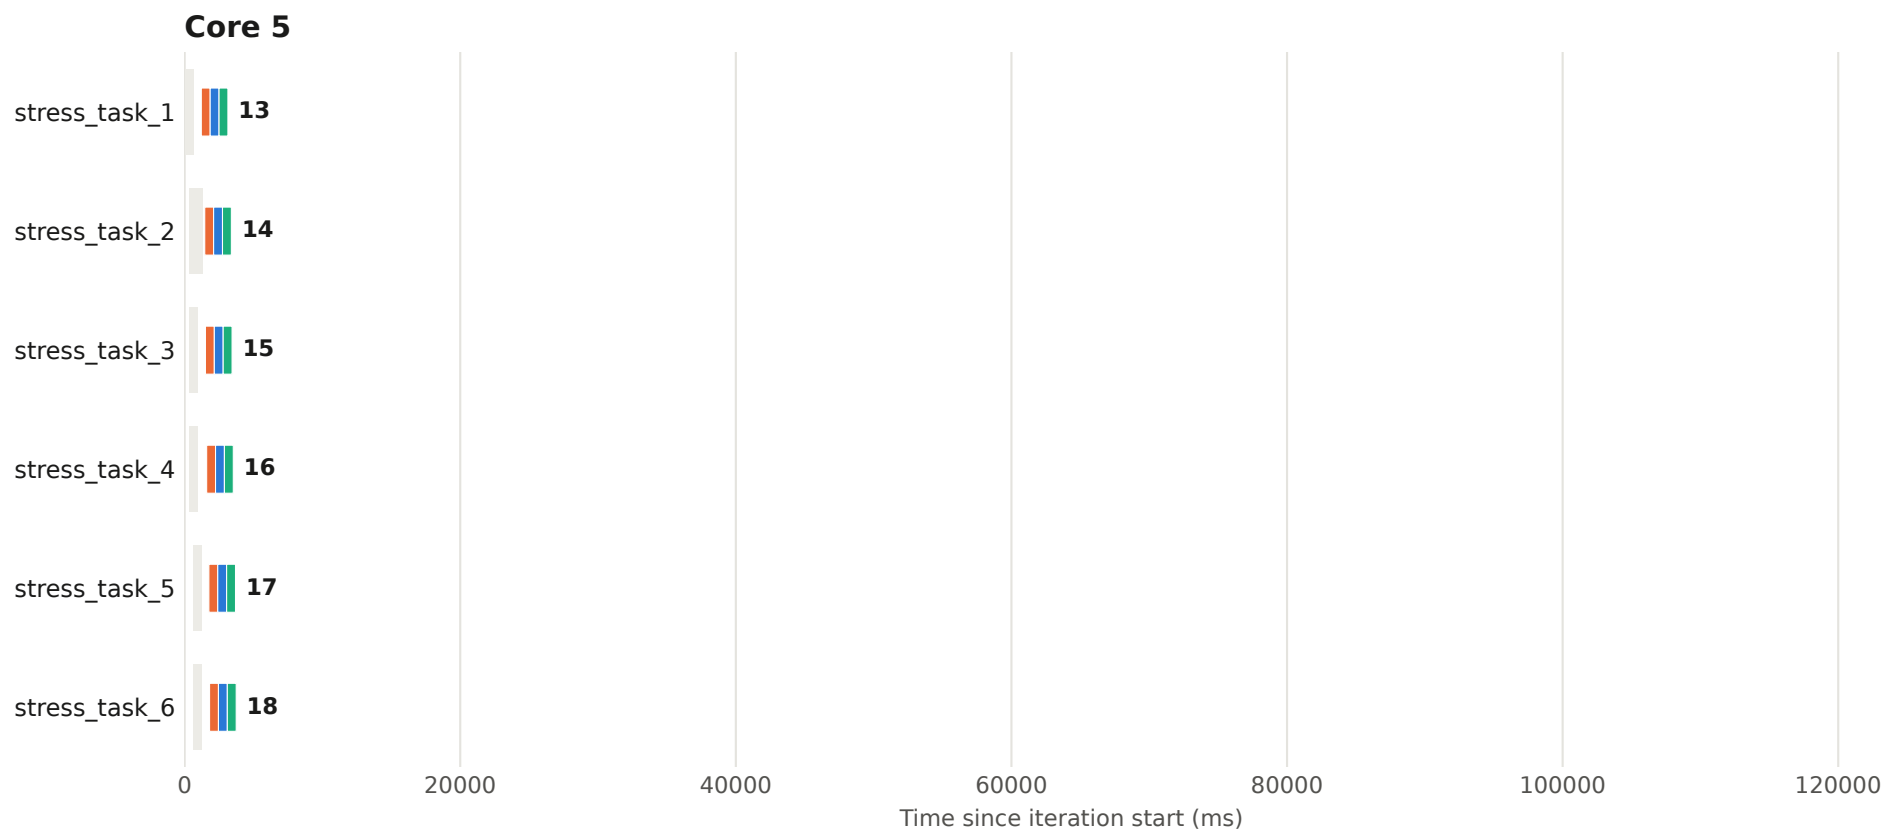


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 47 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

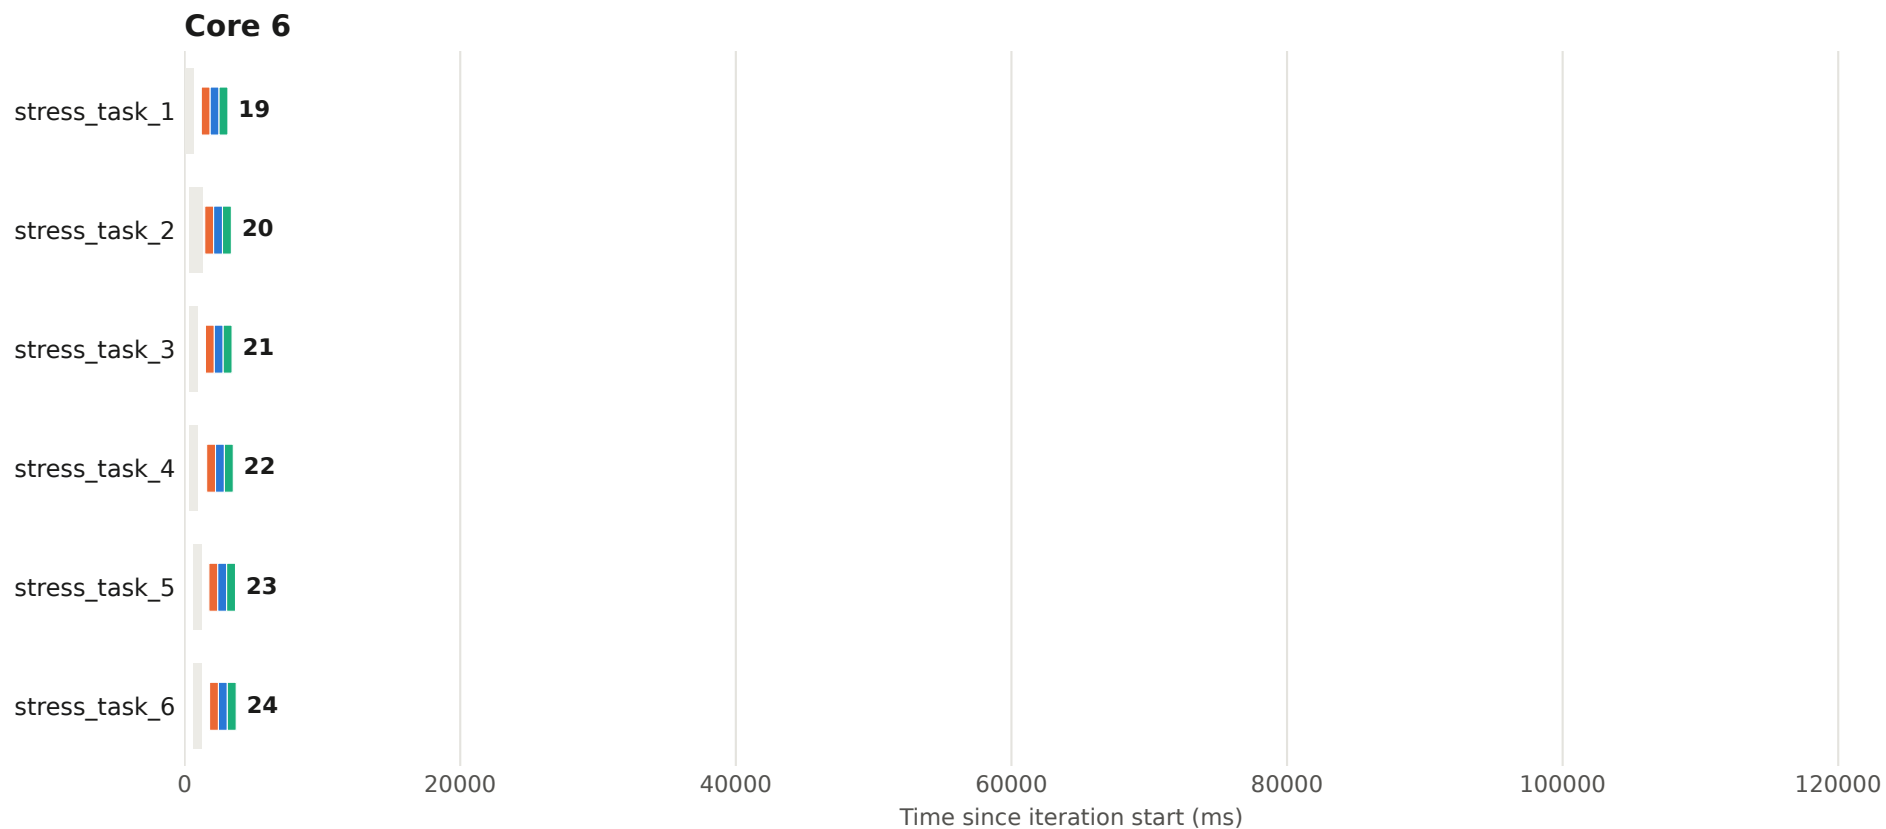


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 47 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

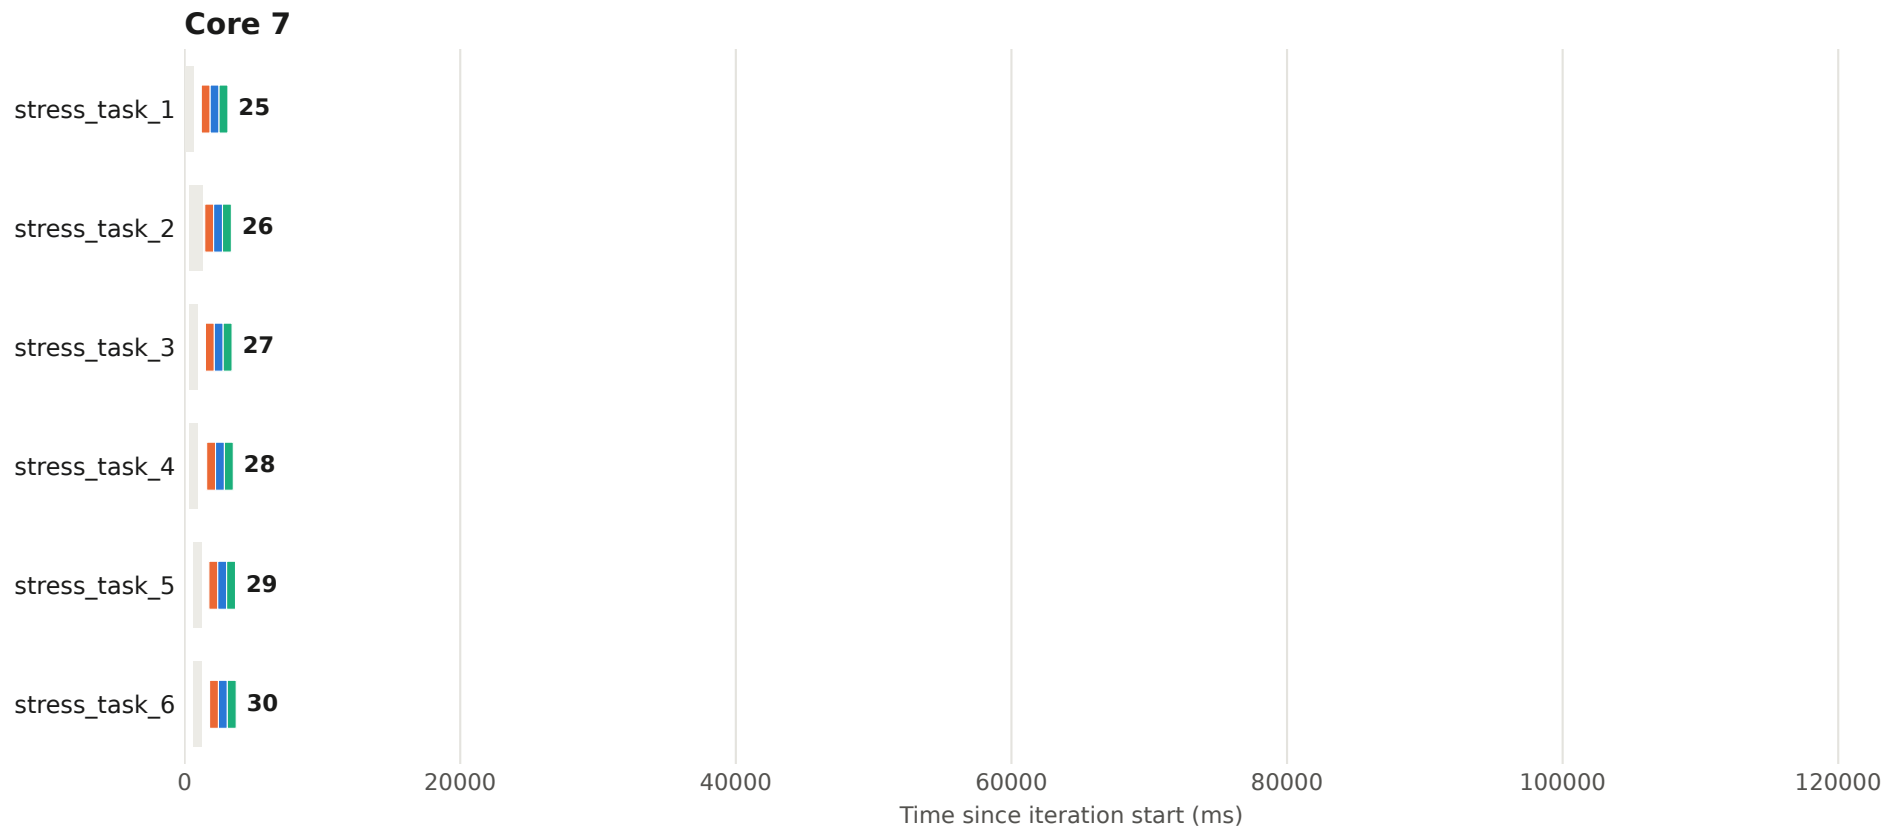


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 48 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

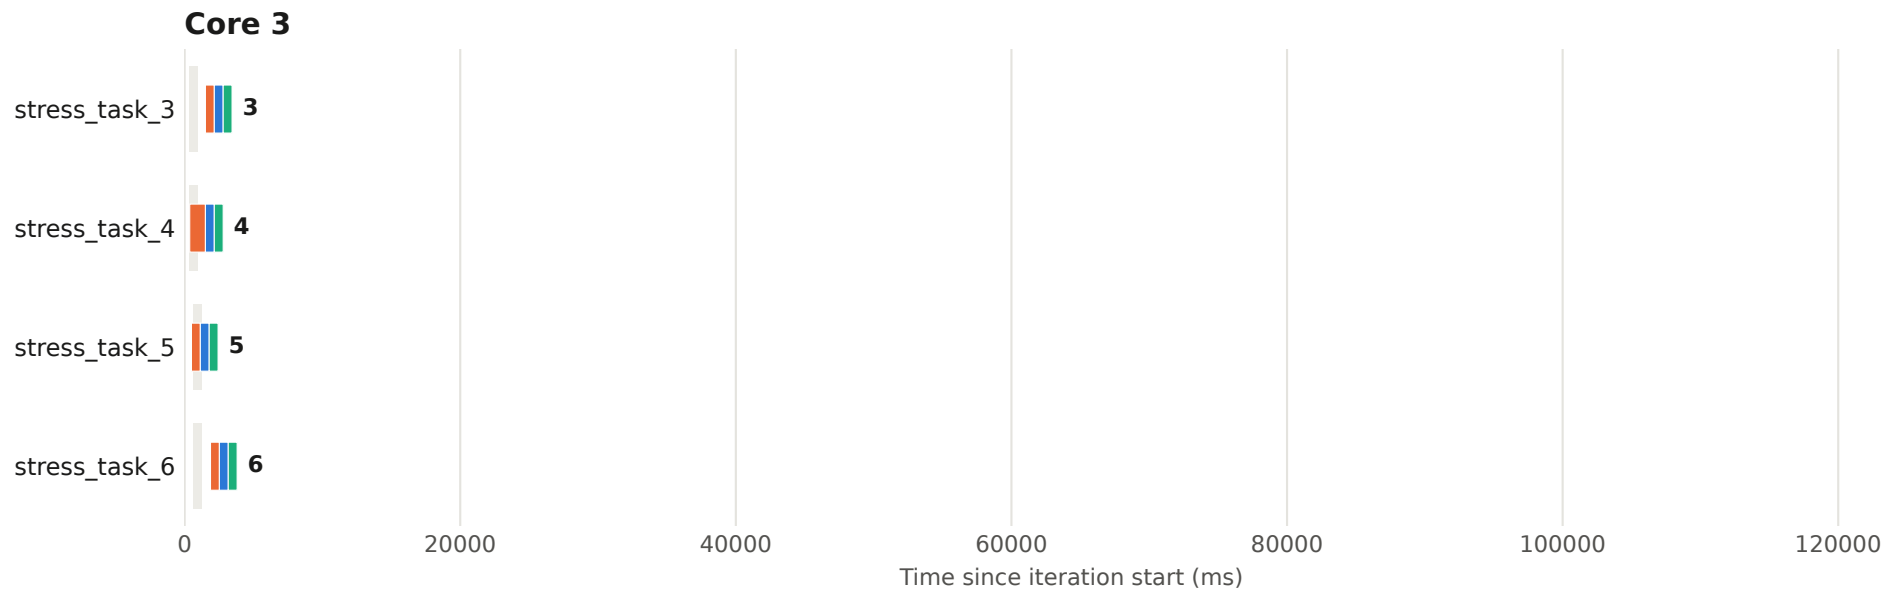

Execution plan - iteration 48 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

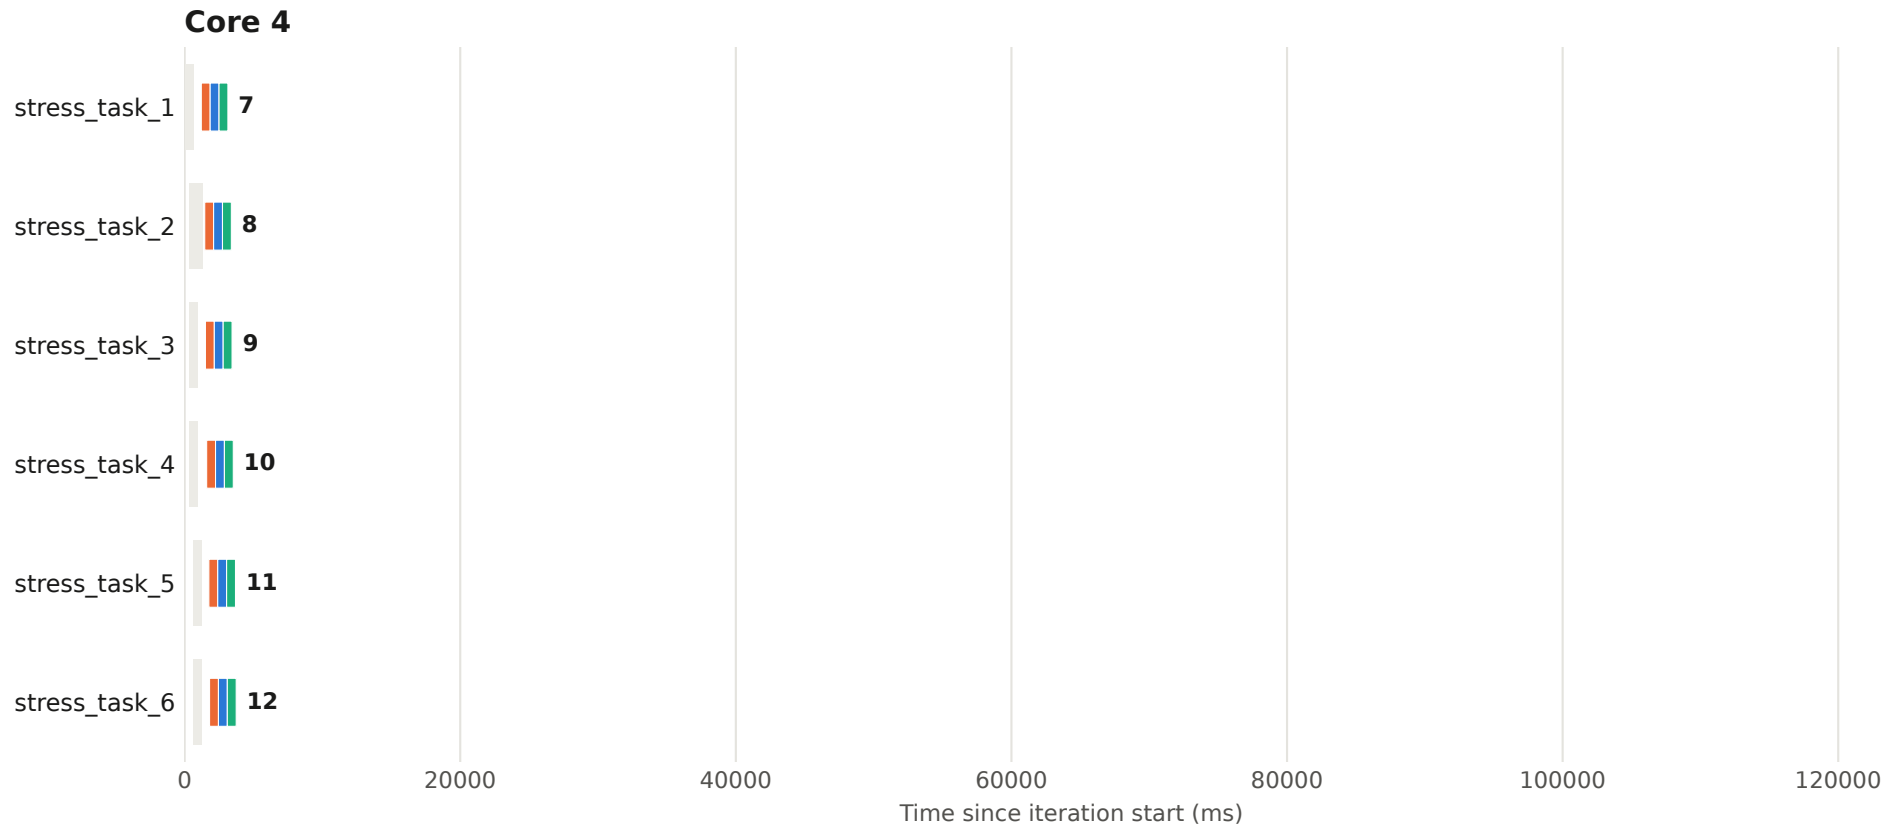


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 48 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

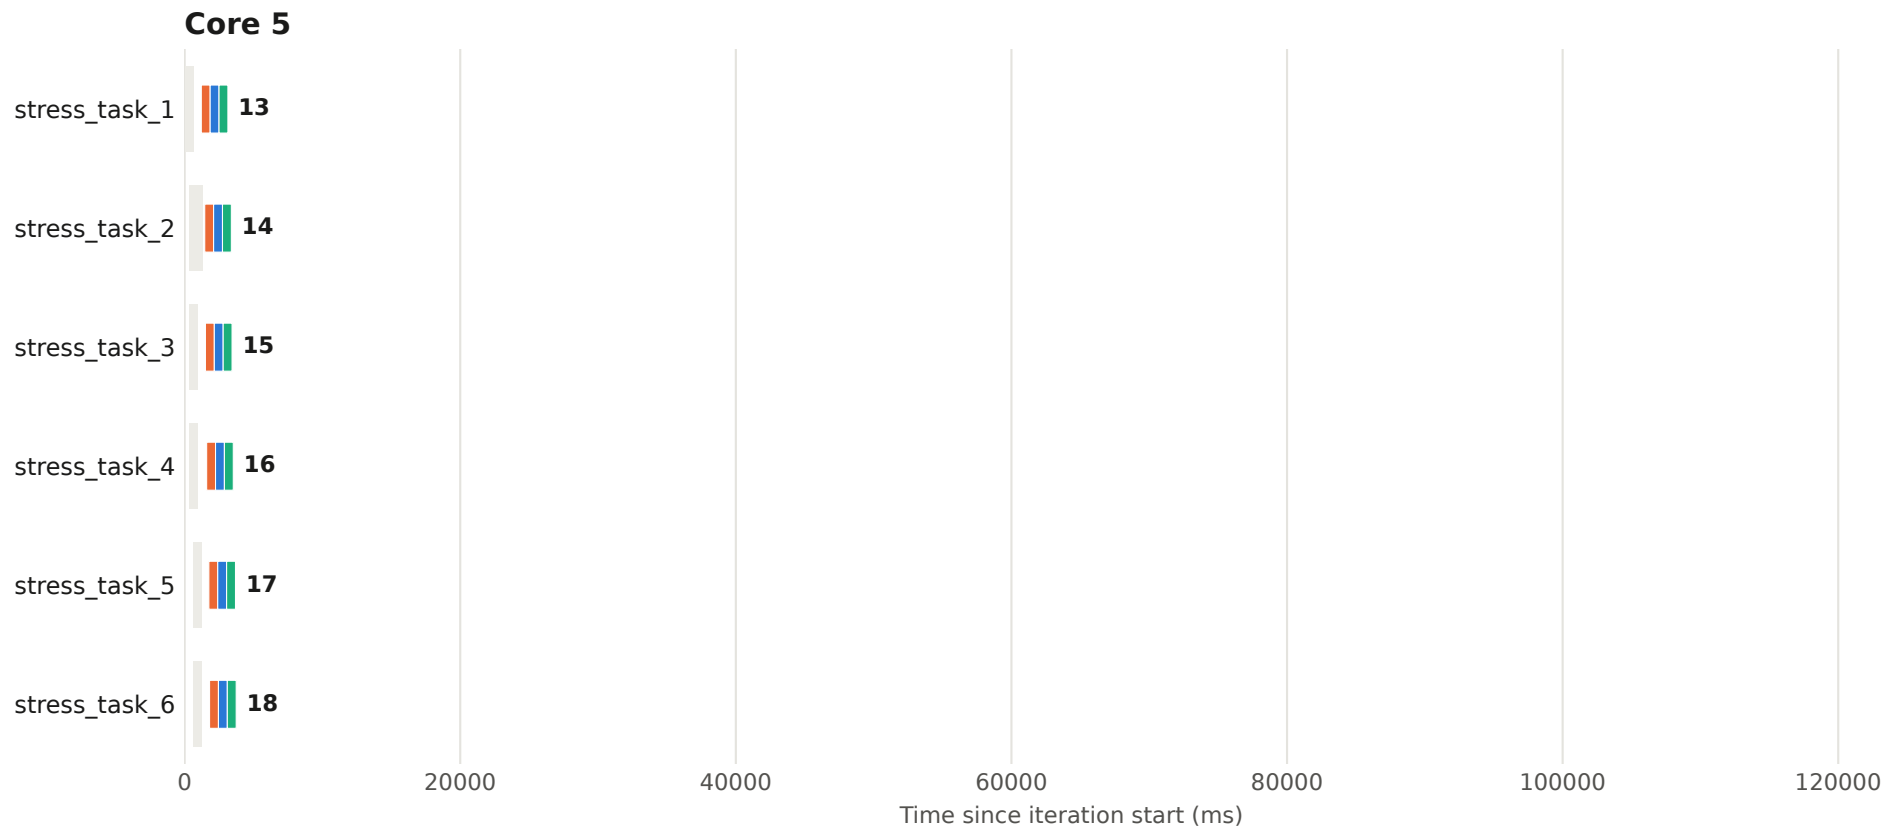


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 48 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

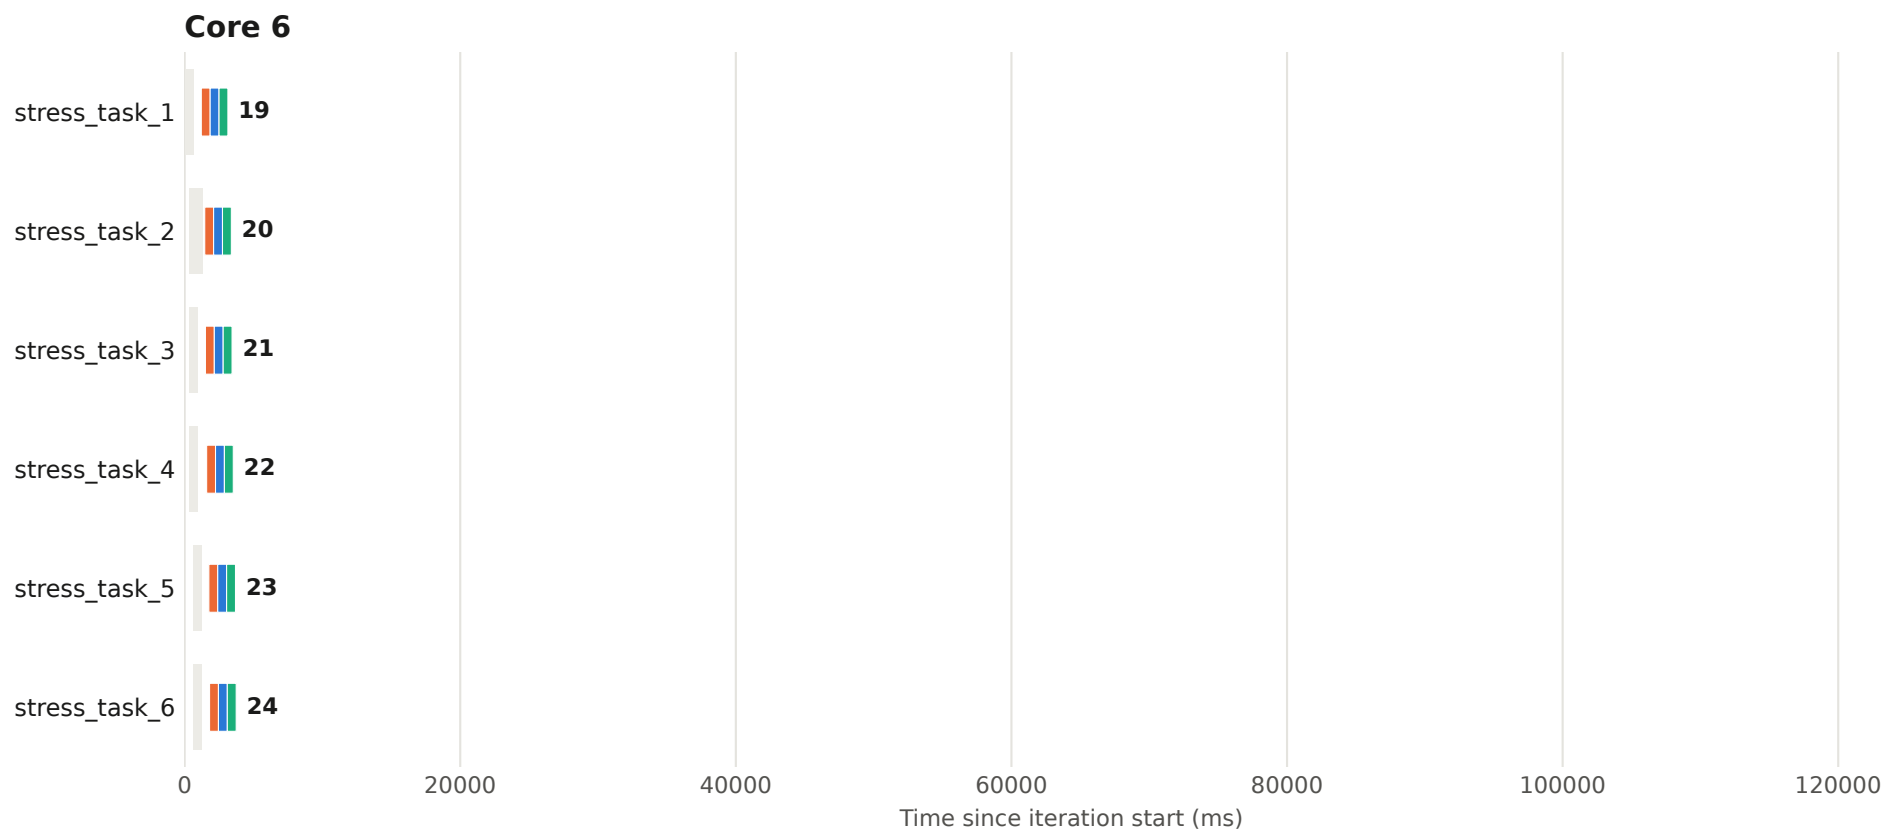


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 48 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

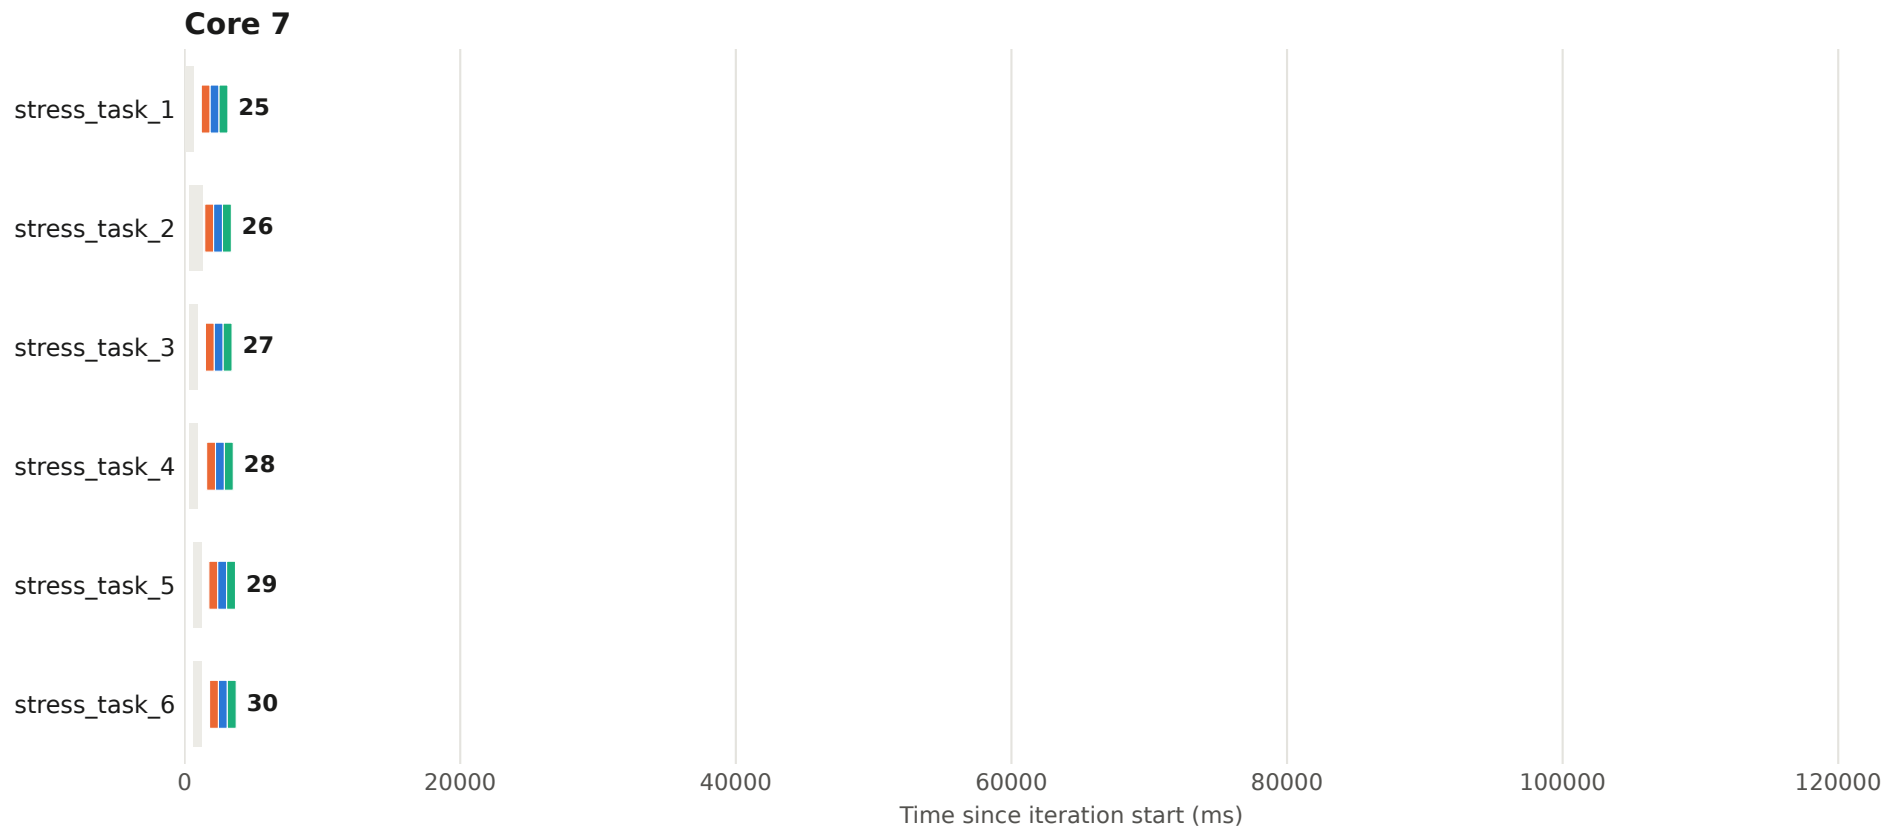


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 49 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

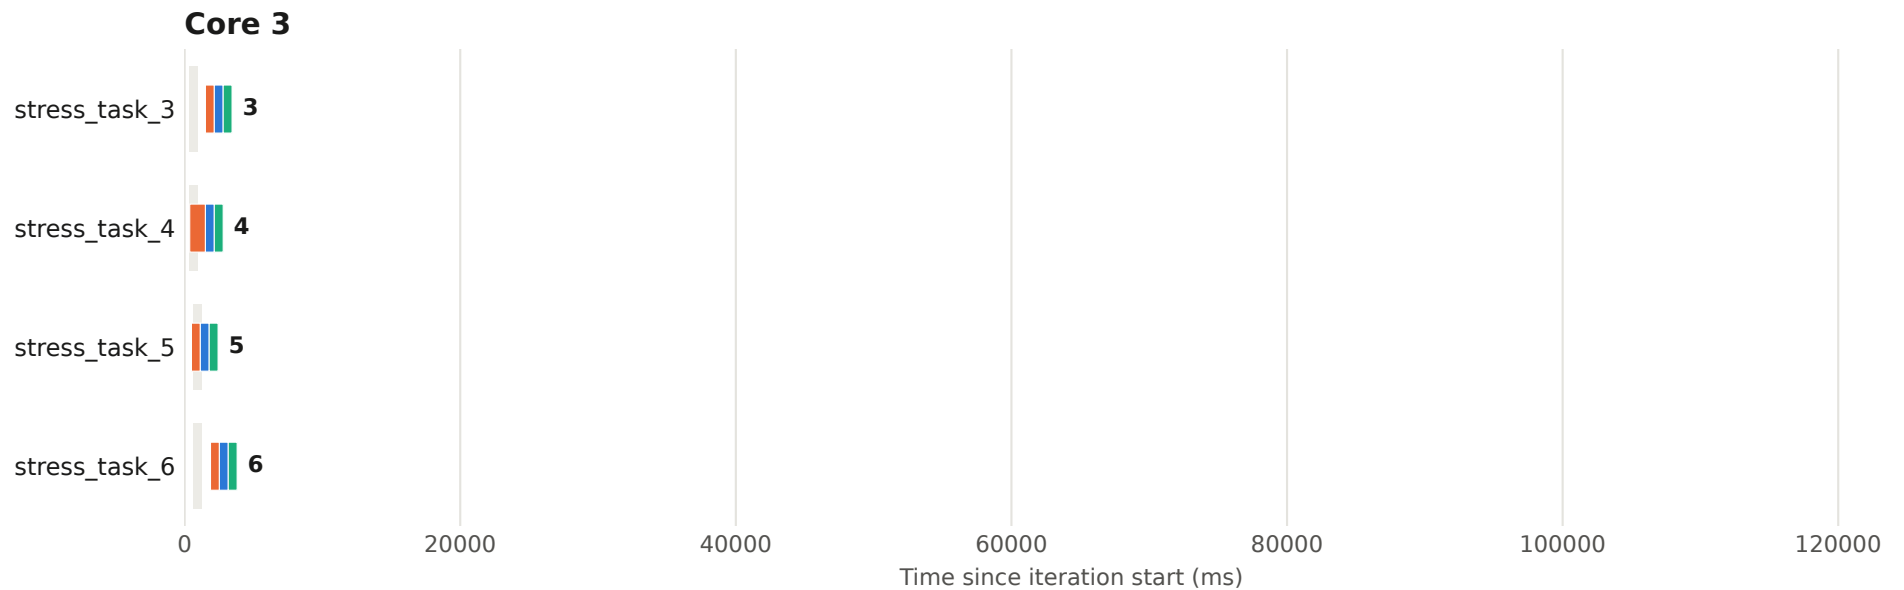


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 49 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

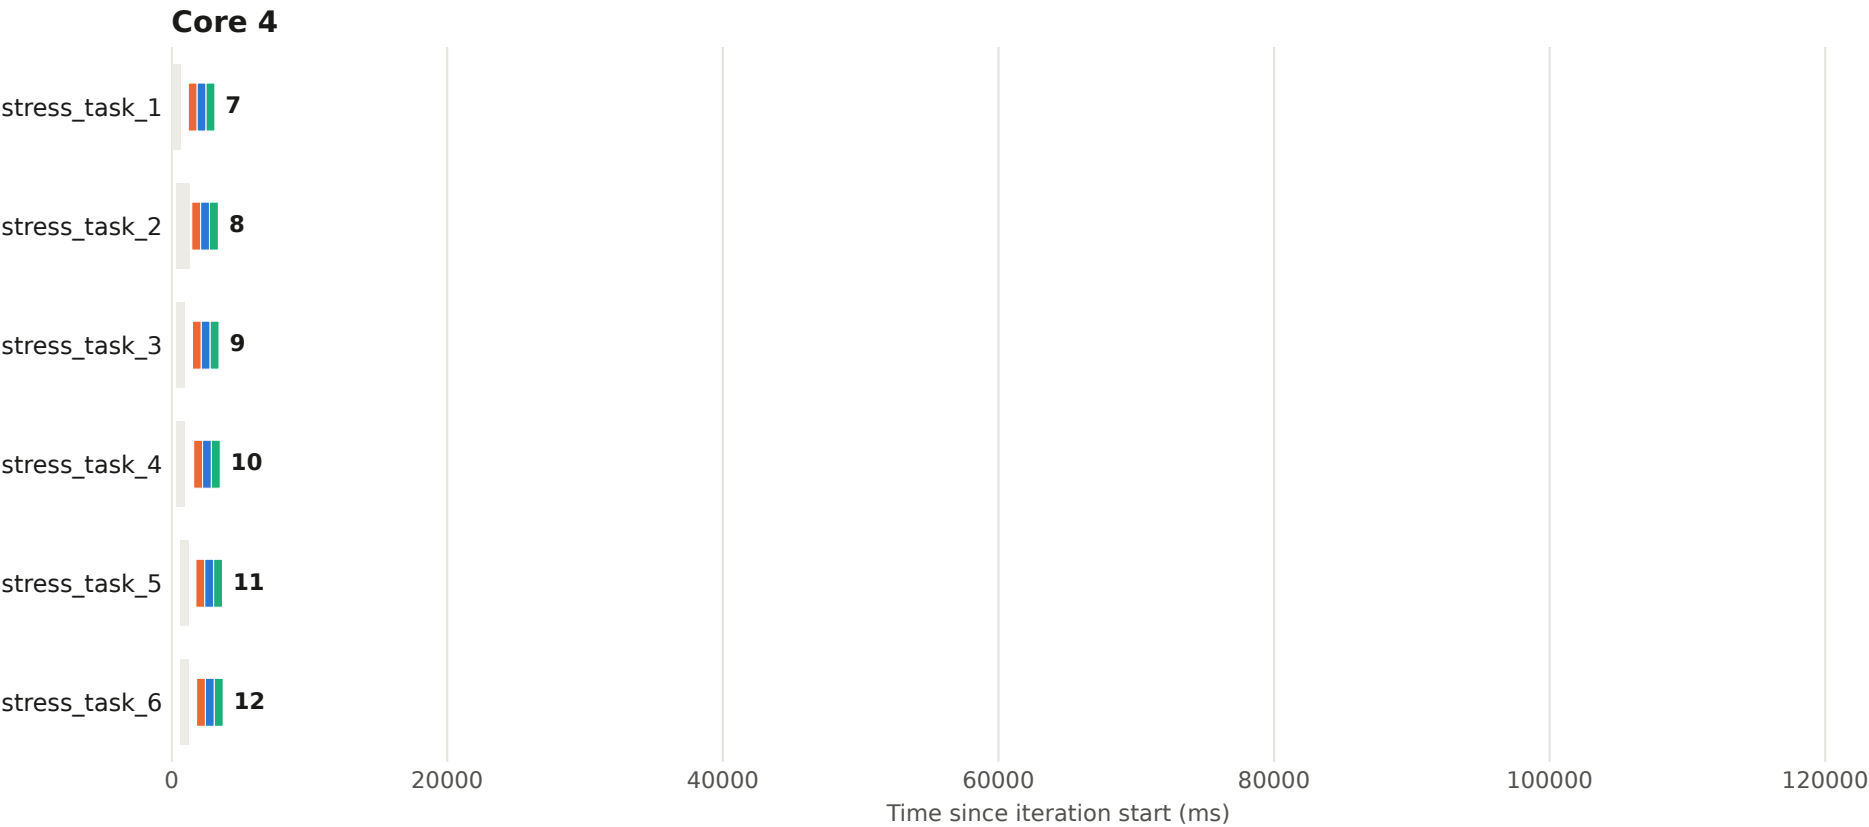


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 49 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

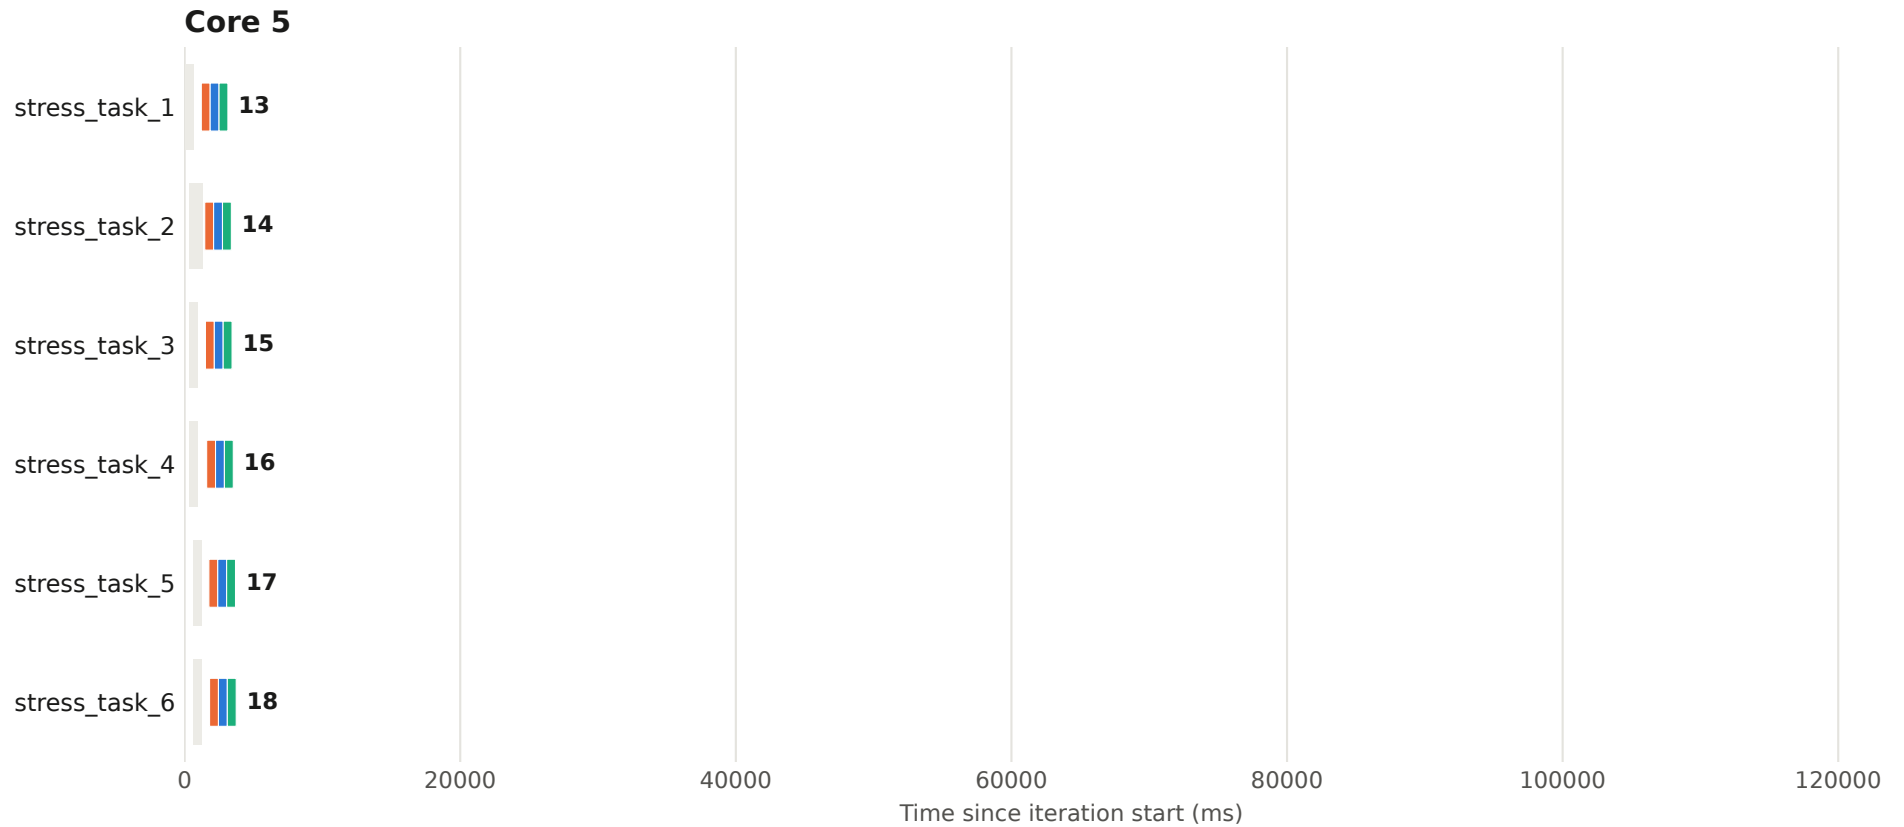


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 49 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

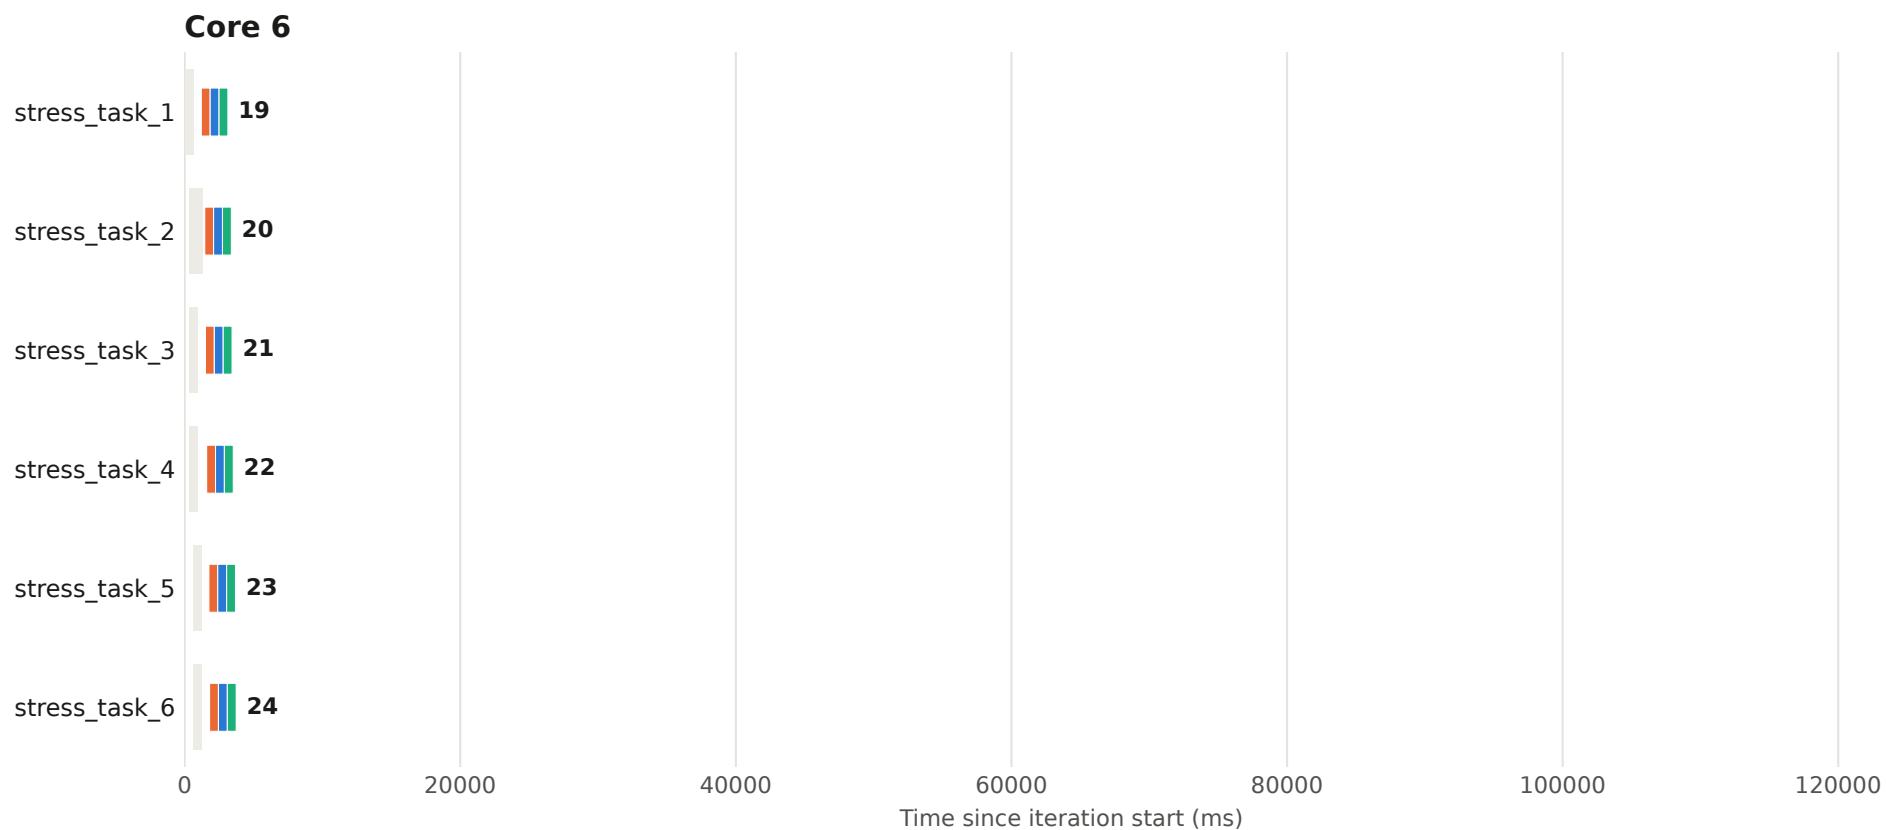


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 49 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

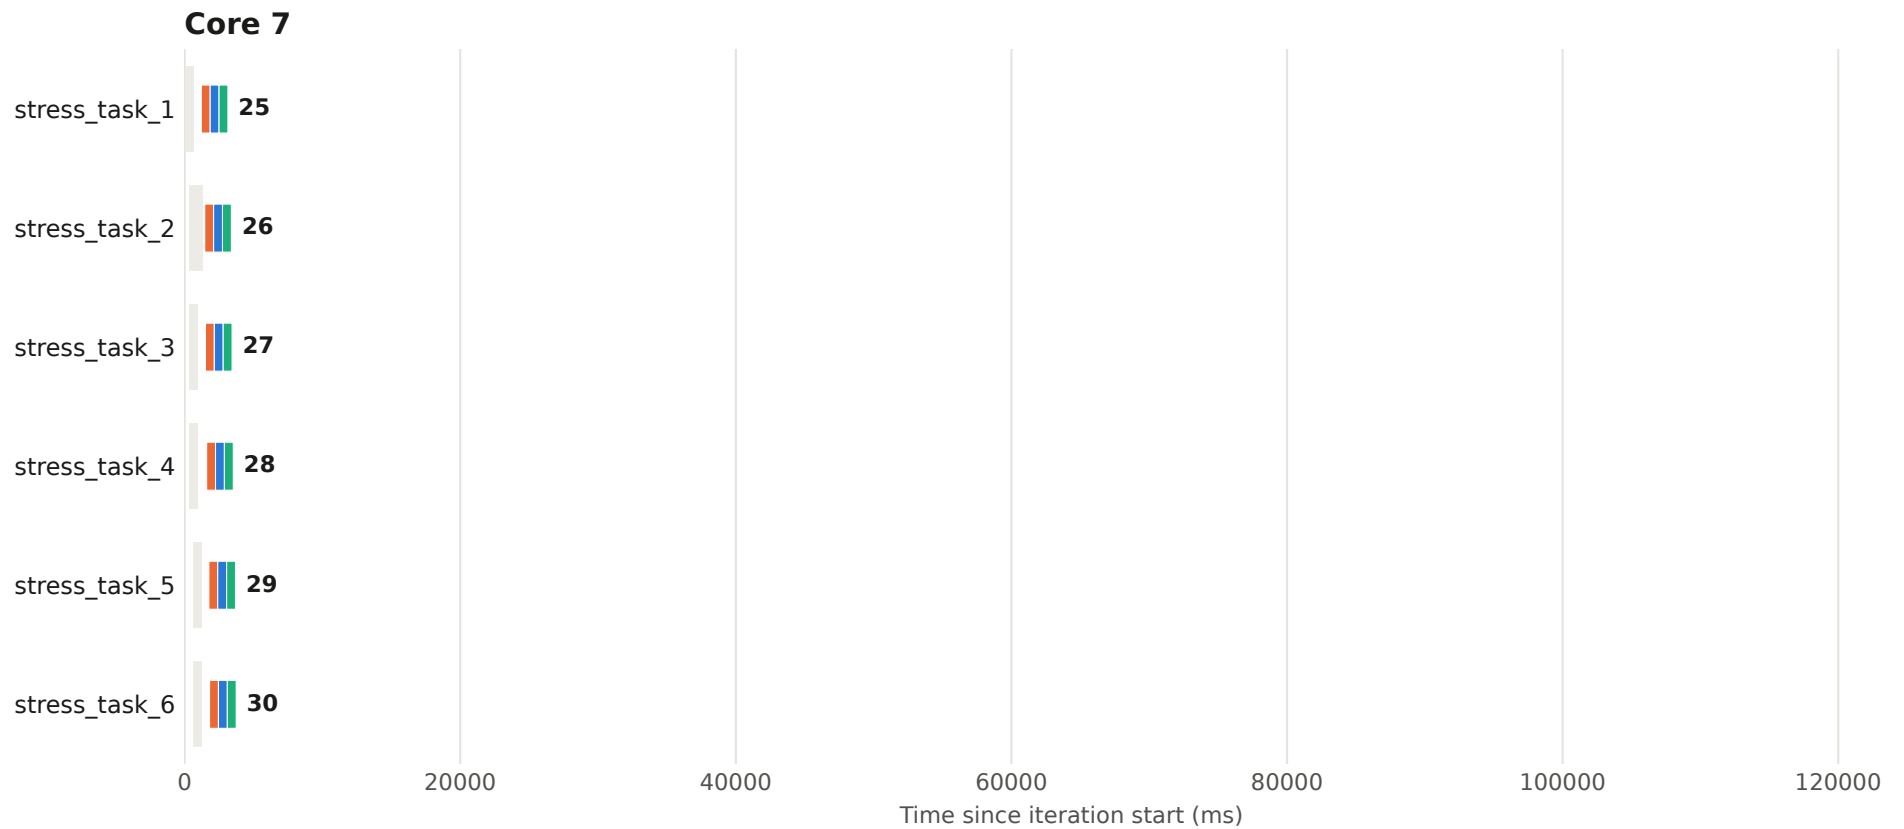


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 50 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

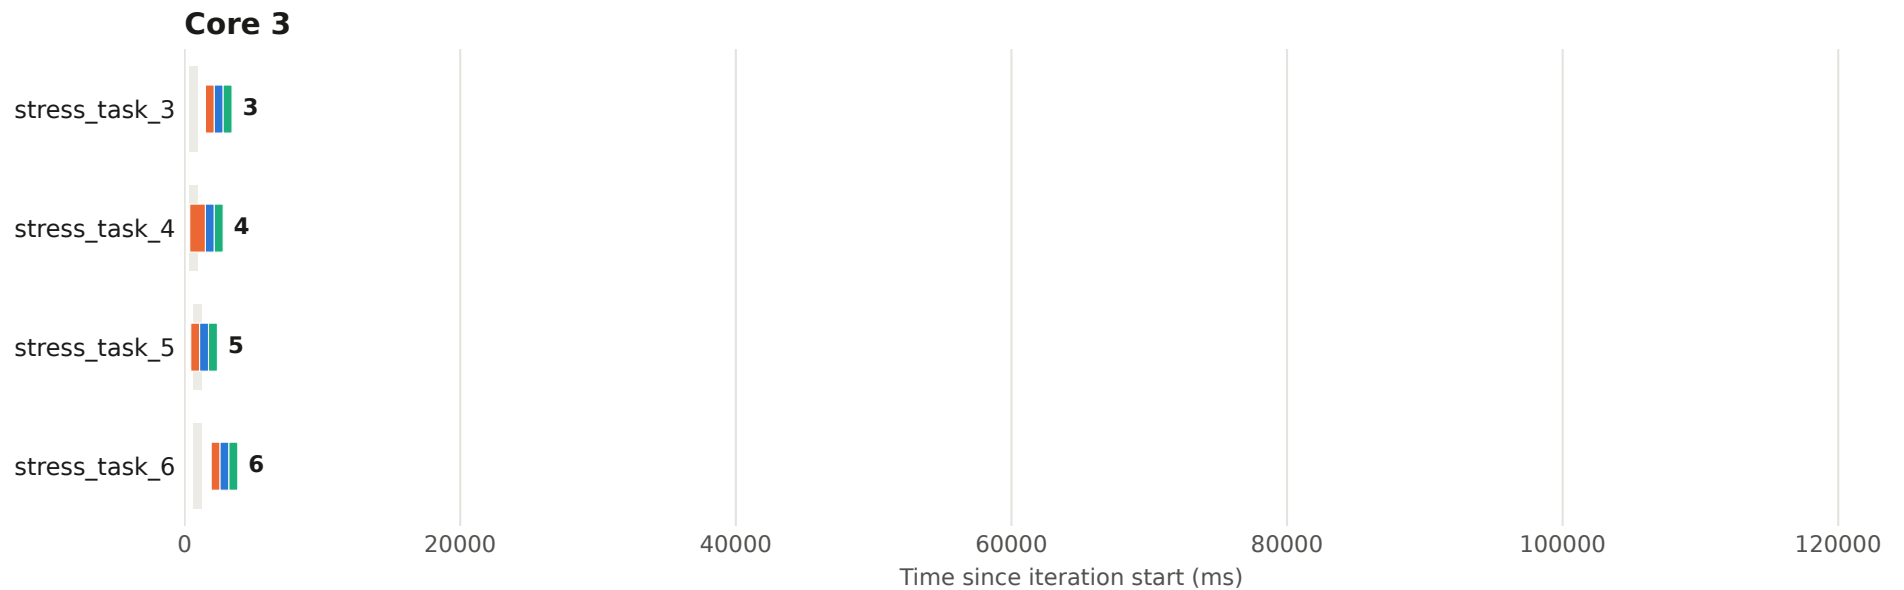


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 50 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

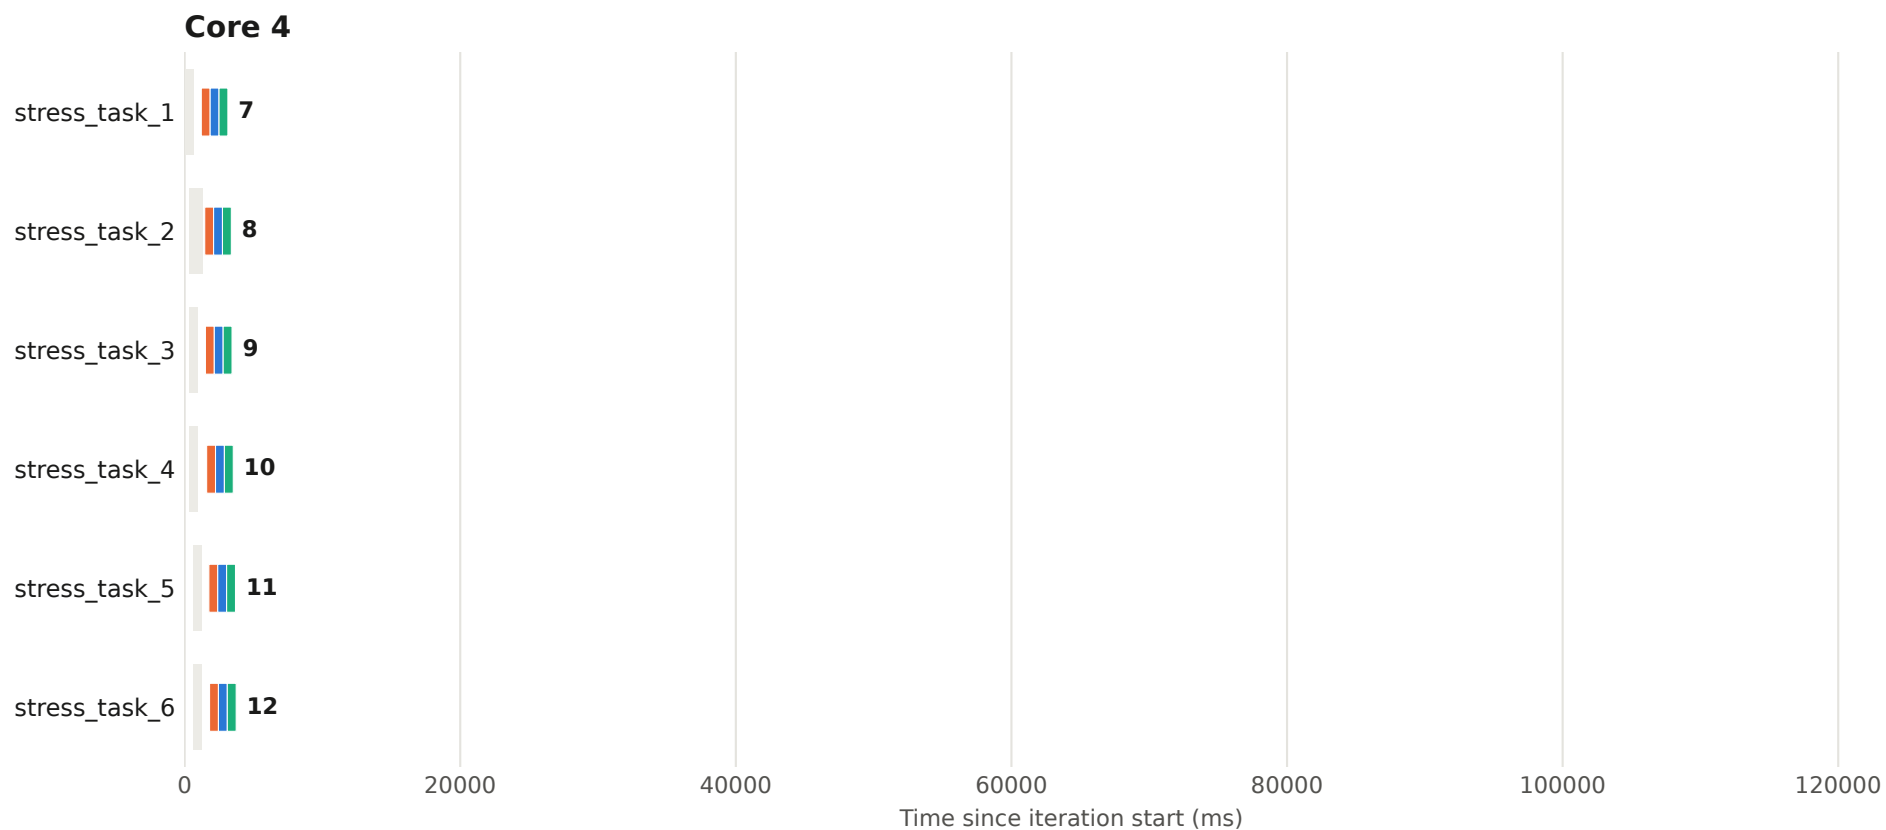


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 50 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

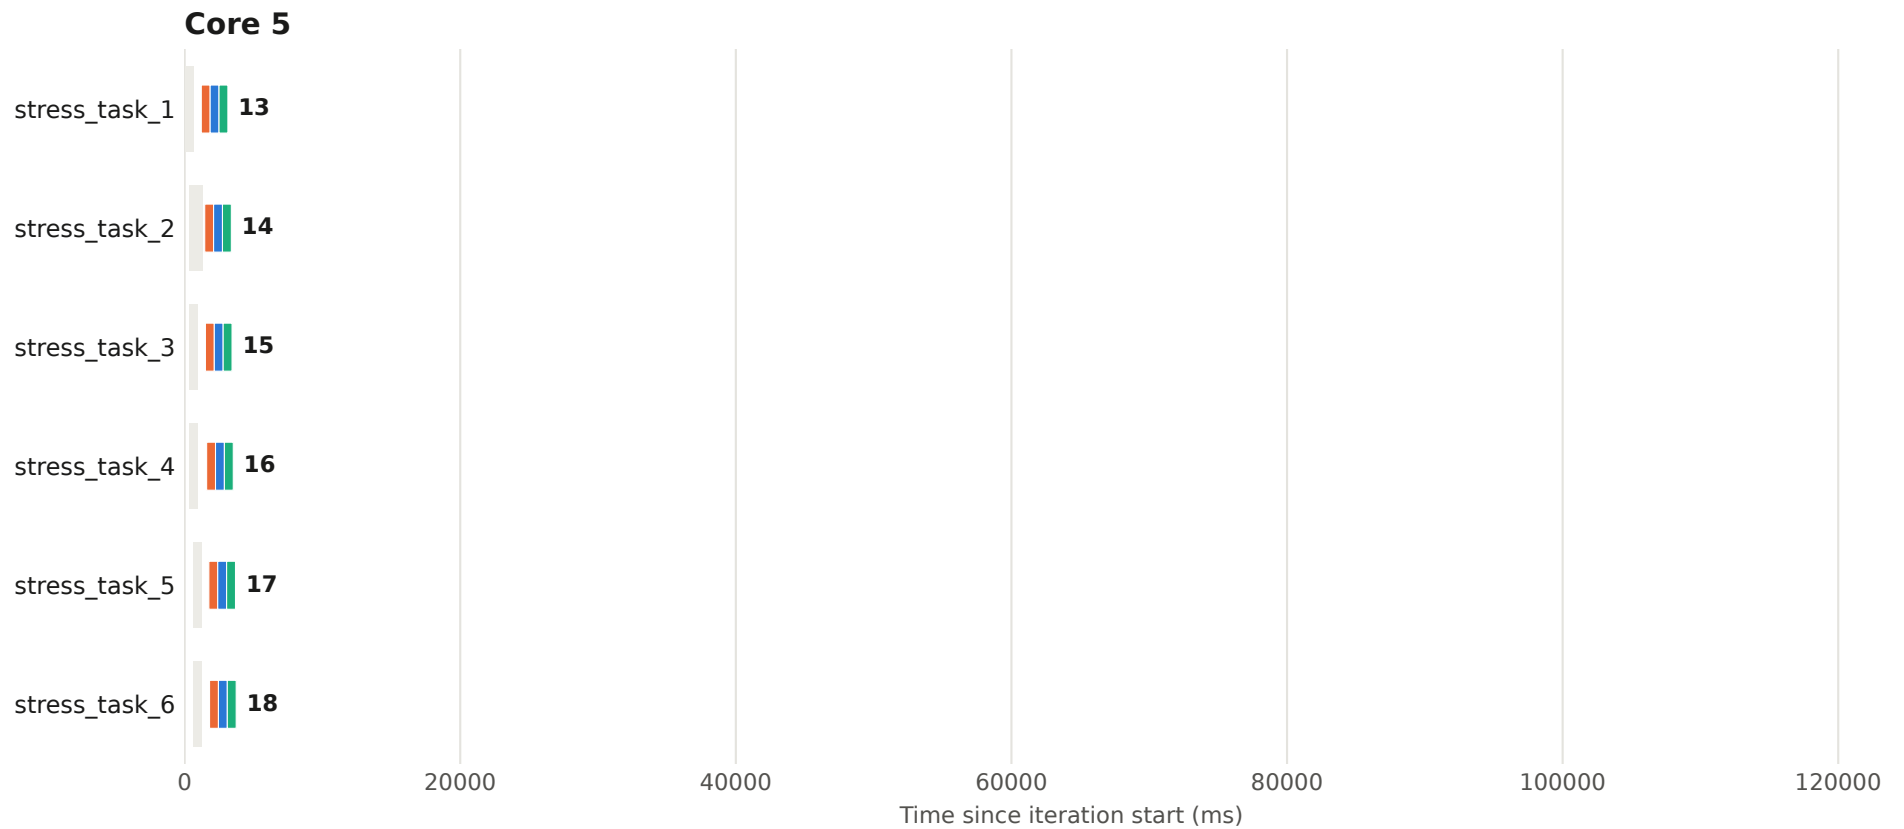


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 50 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

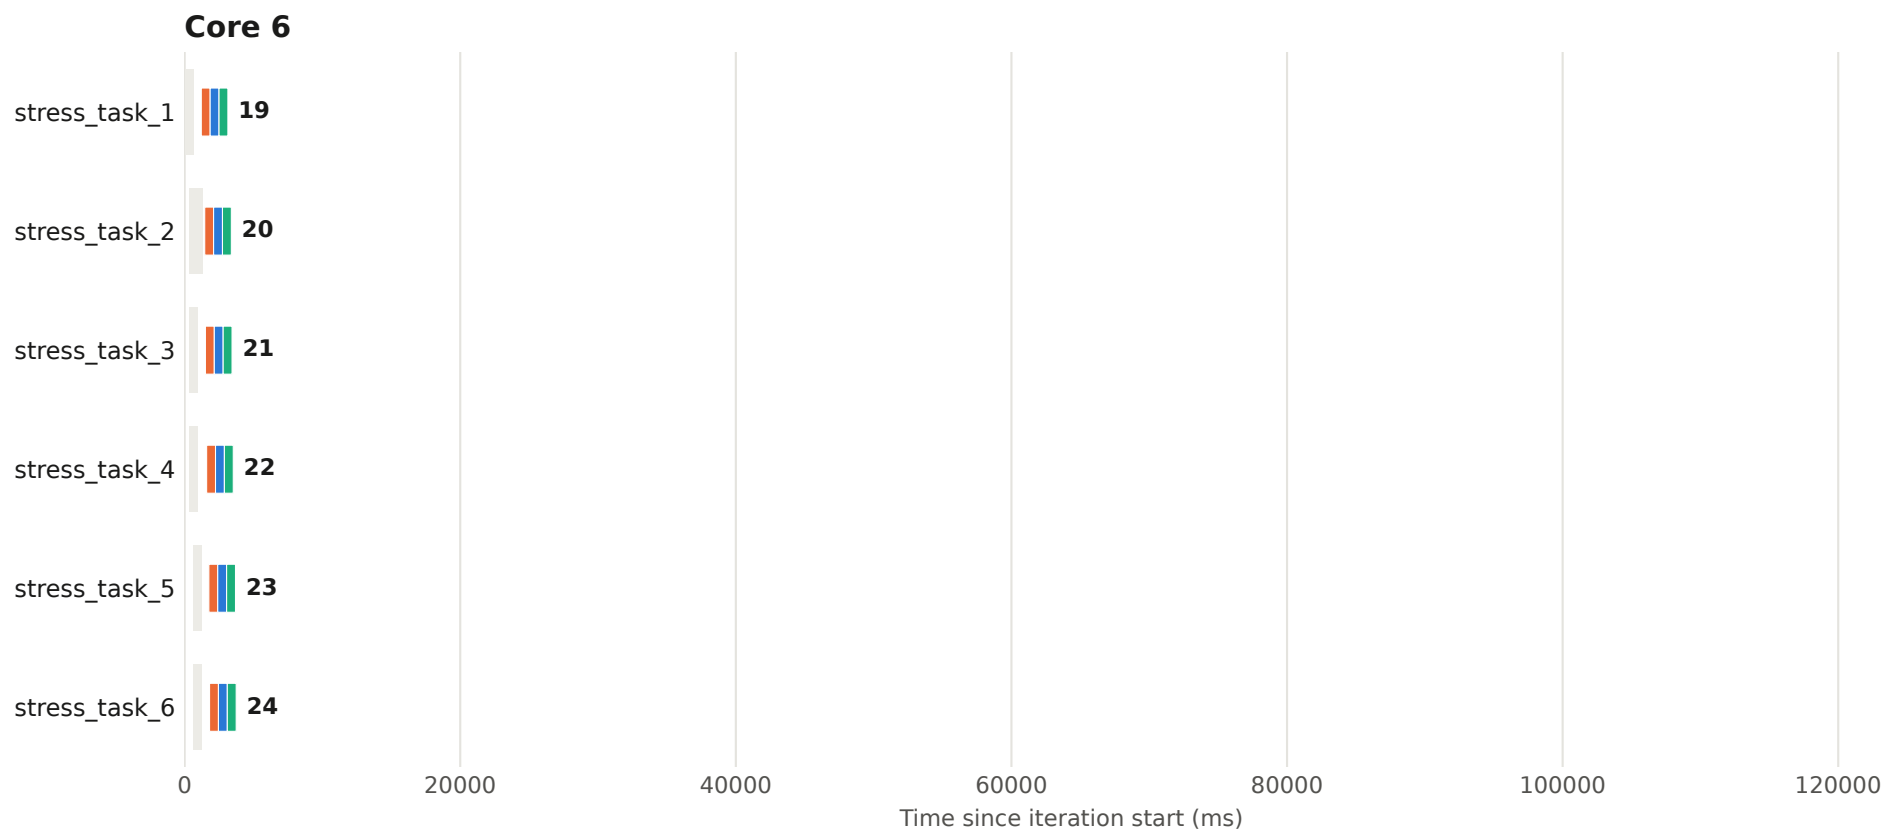


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 50 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

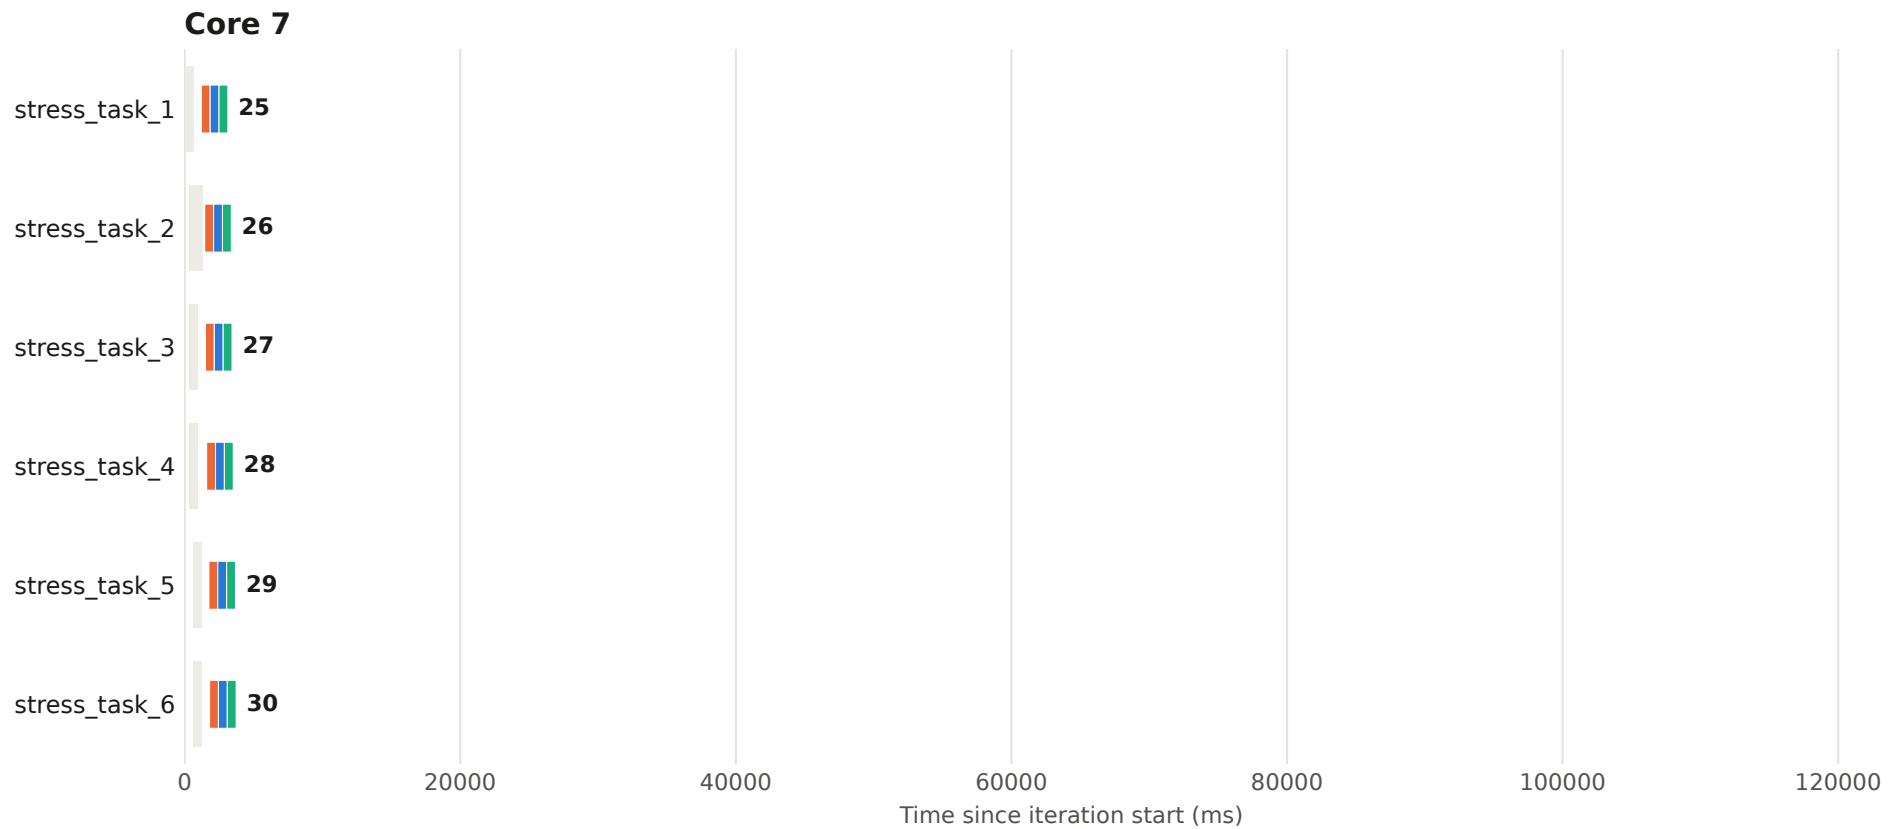


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 51 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

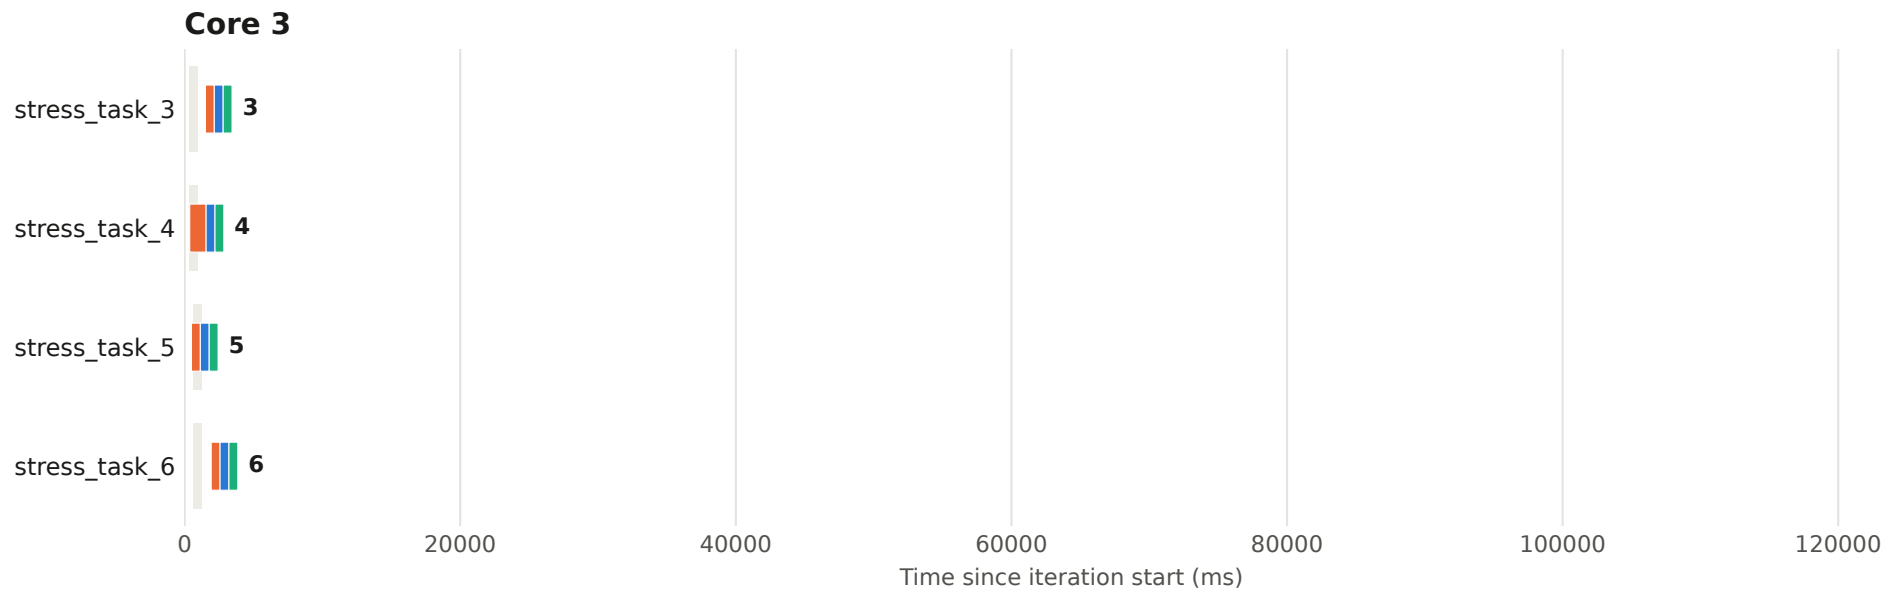


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 51 - core 4

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

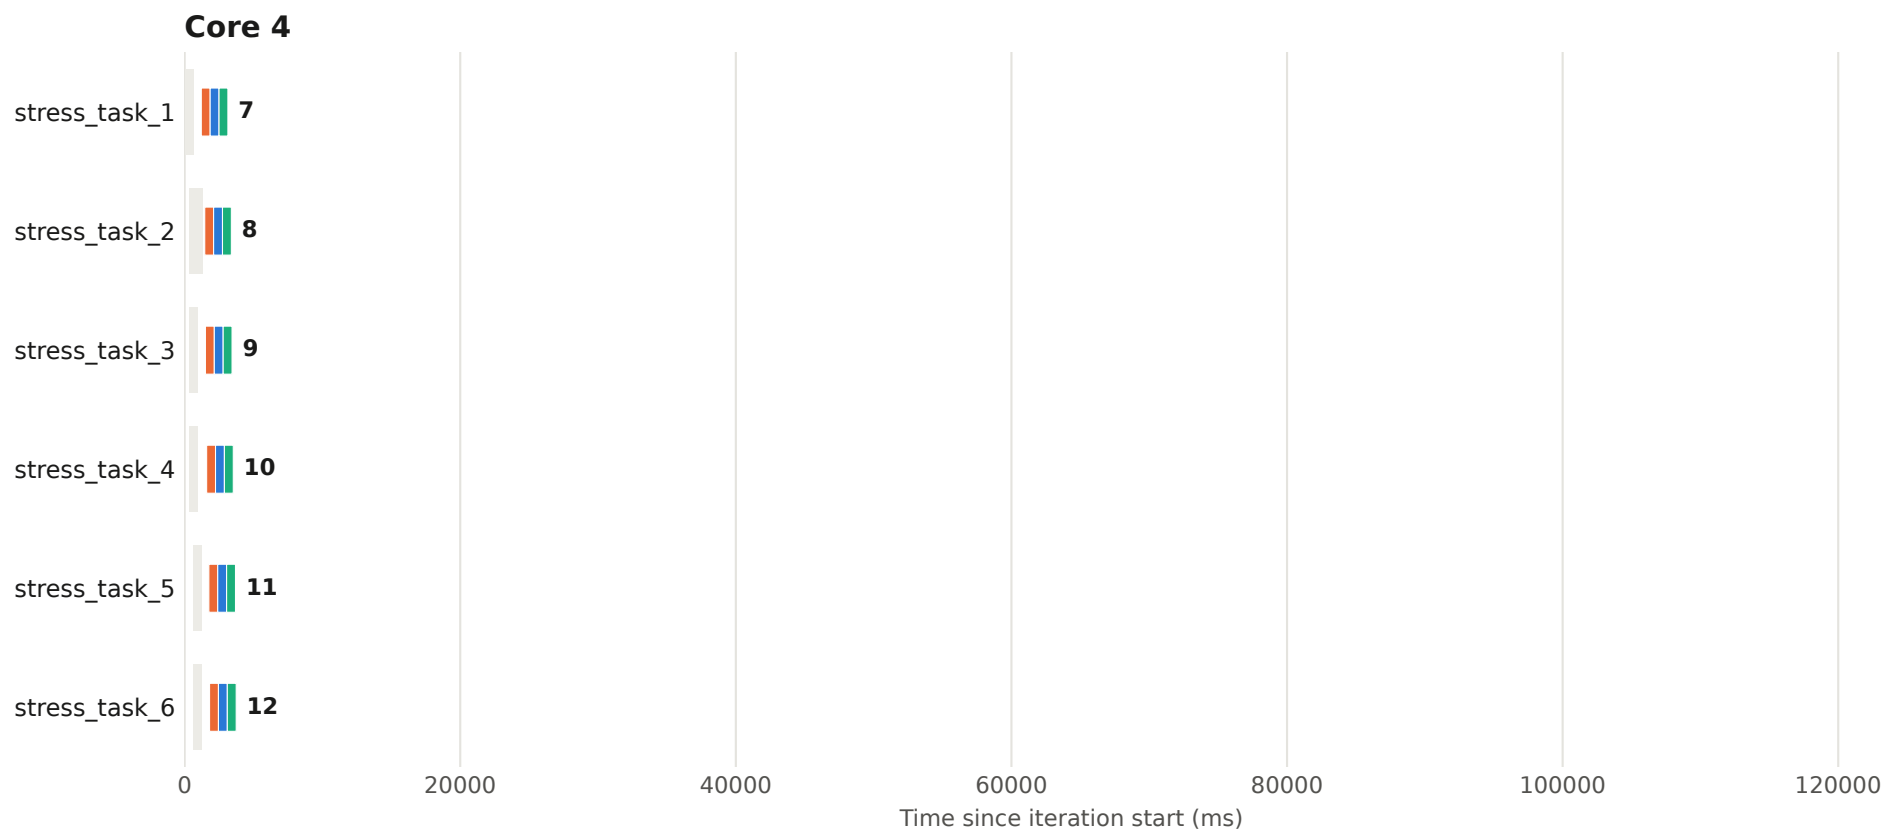

Execution plan - iteration 51 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

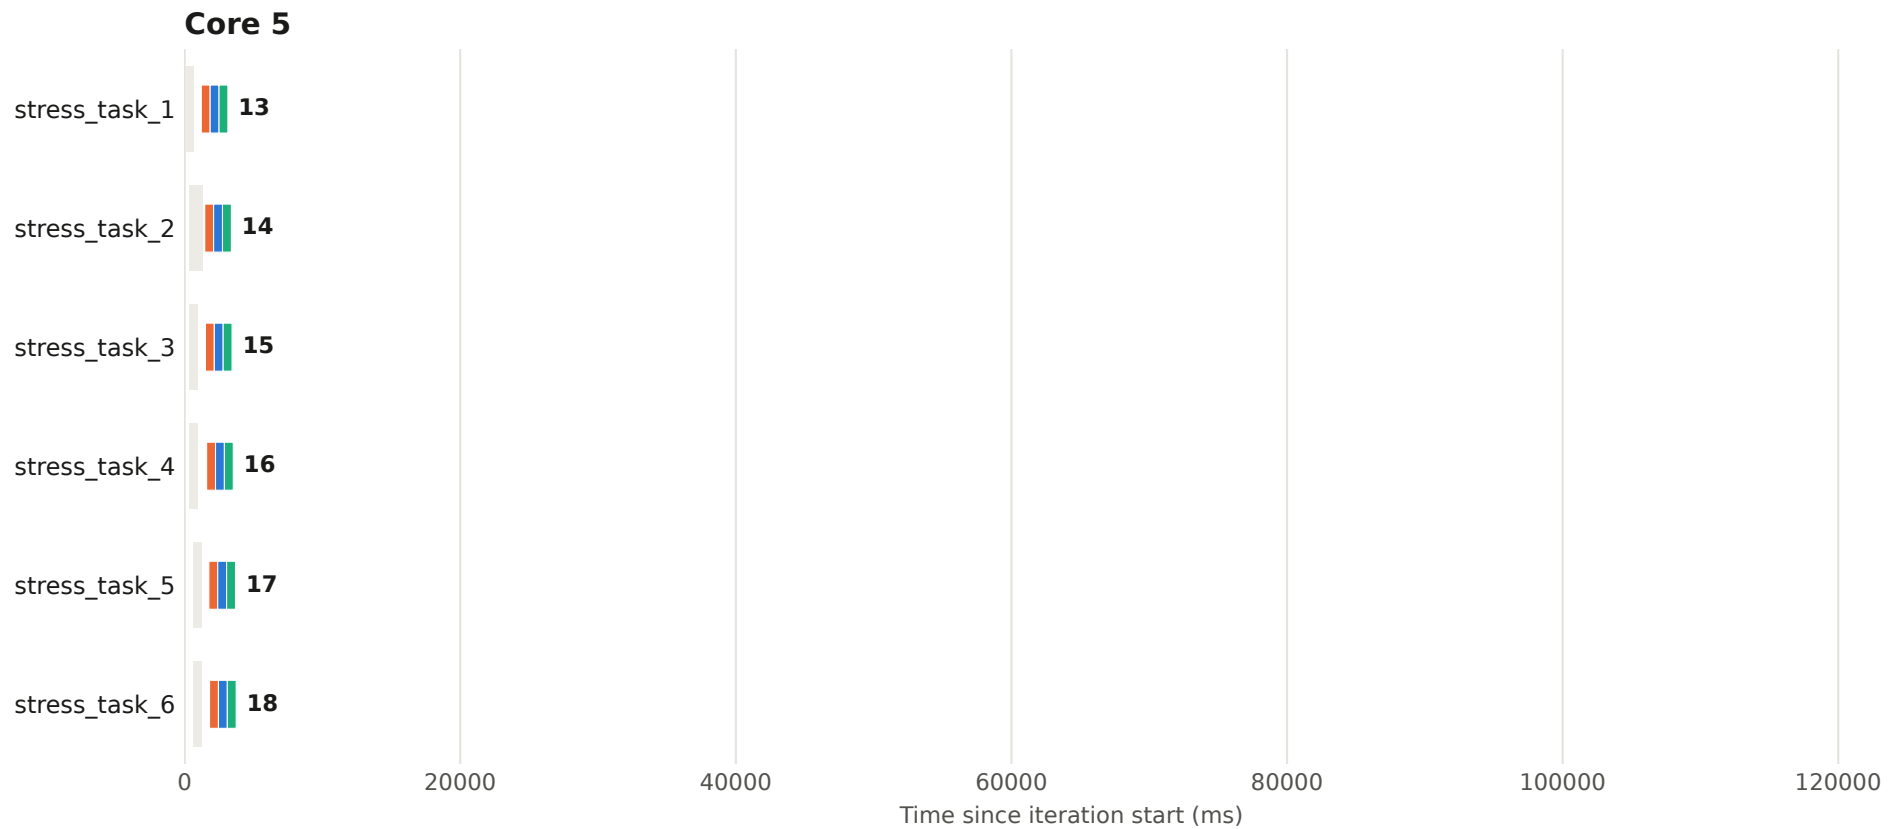


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 51 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

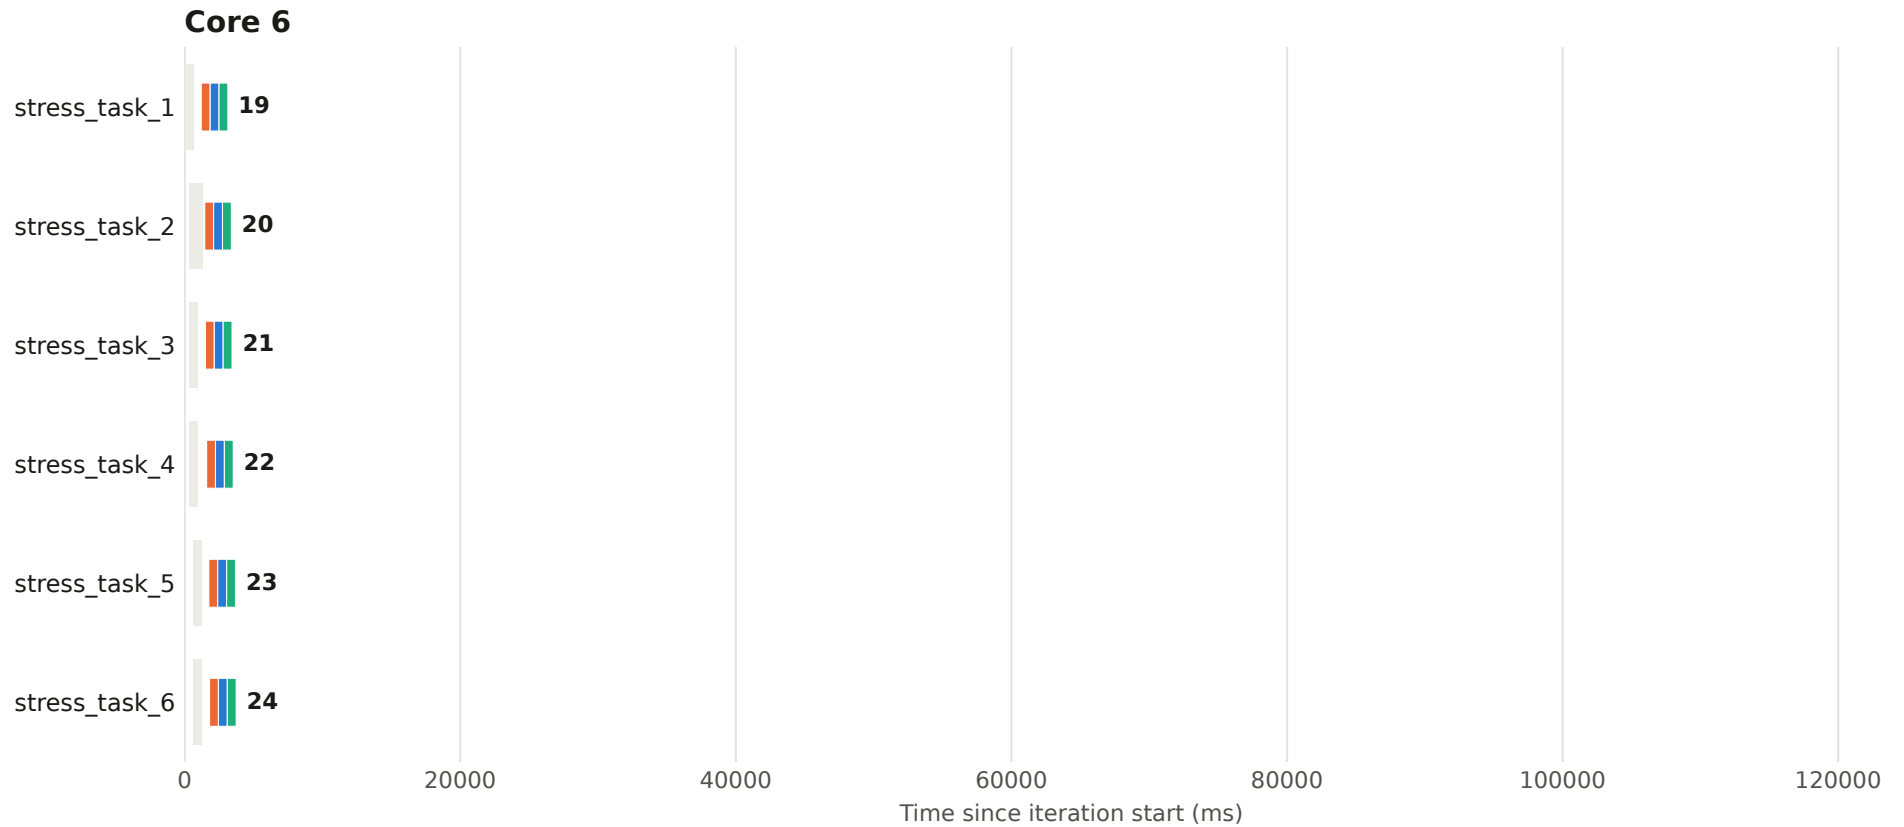


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 51 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

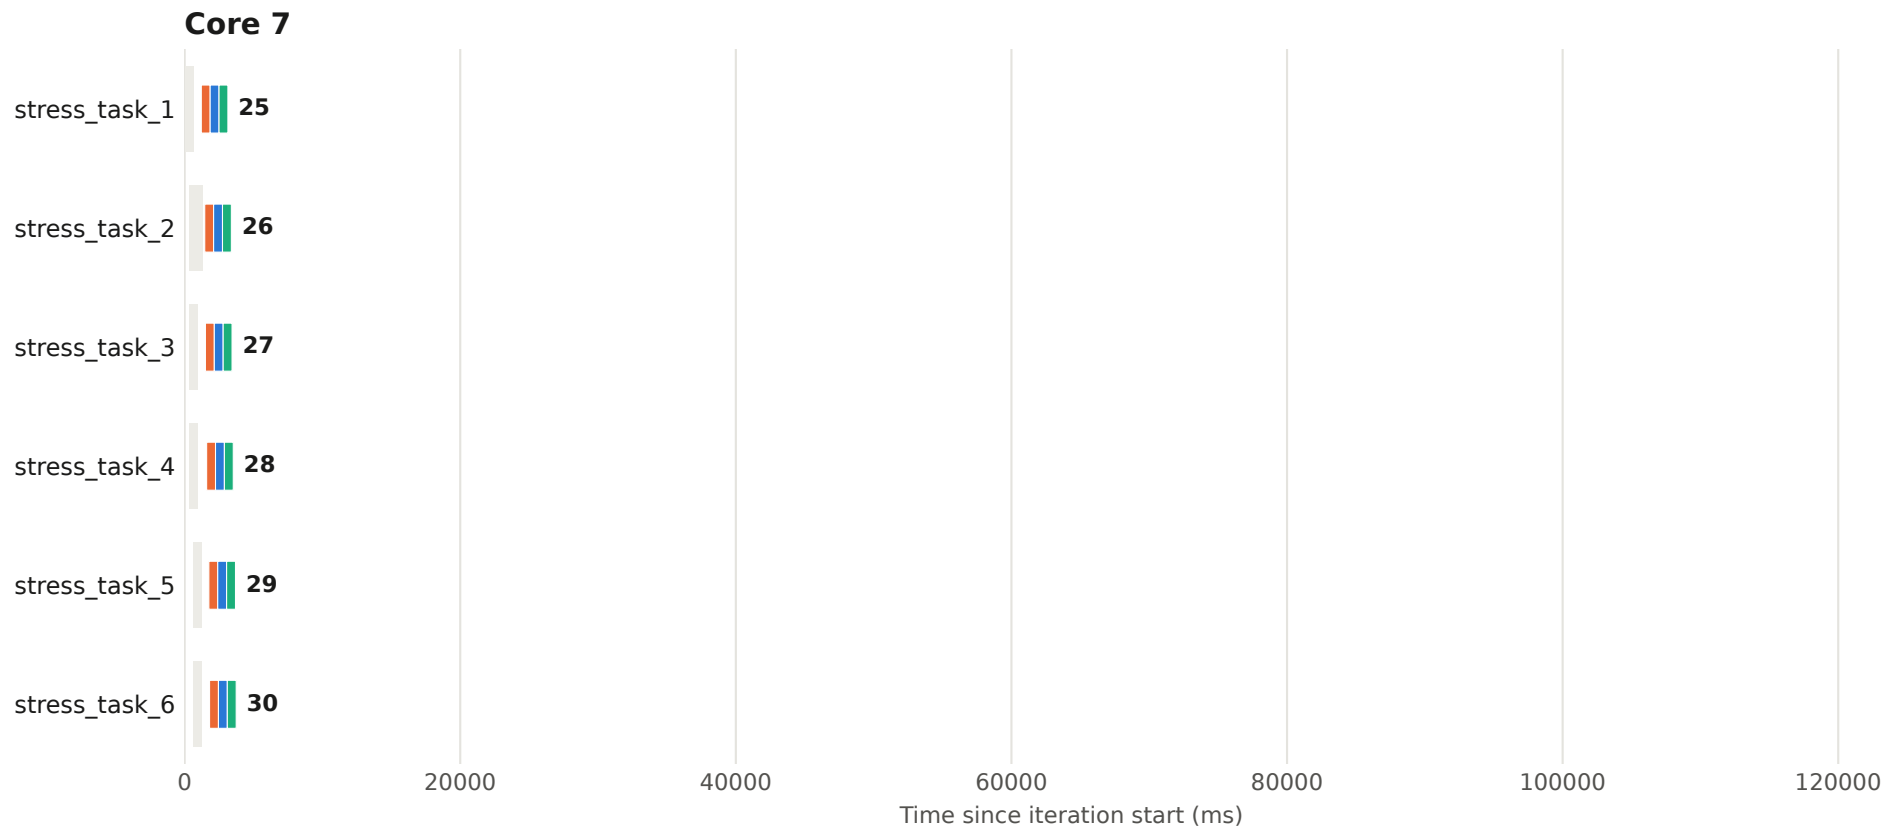


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 52 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

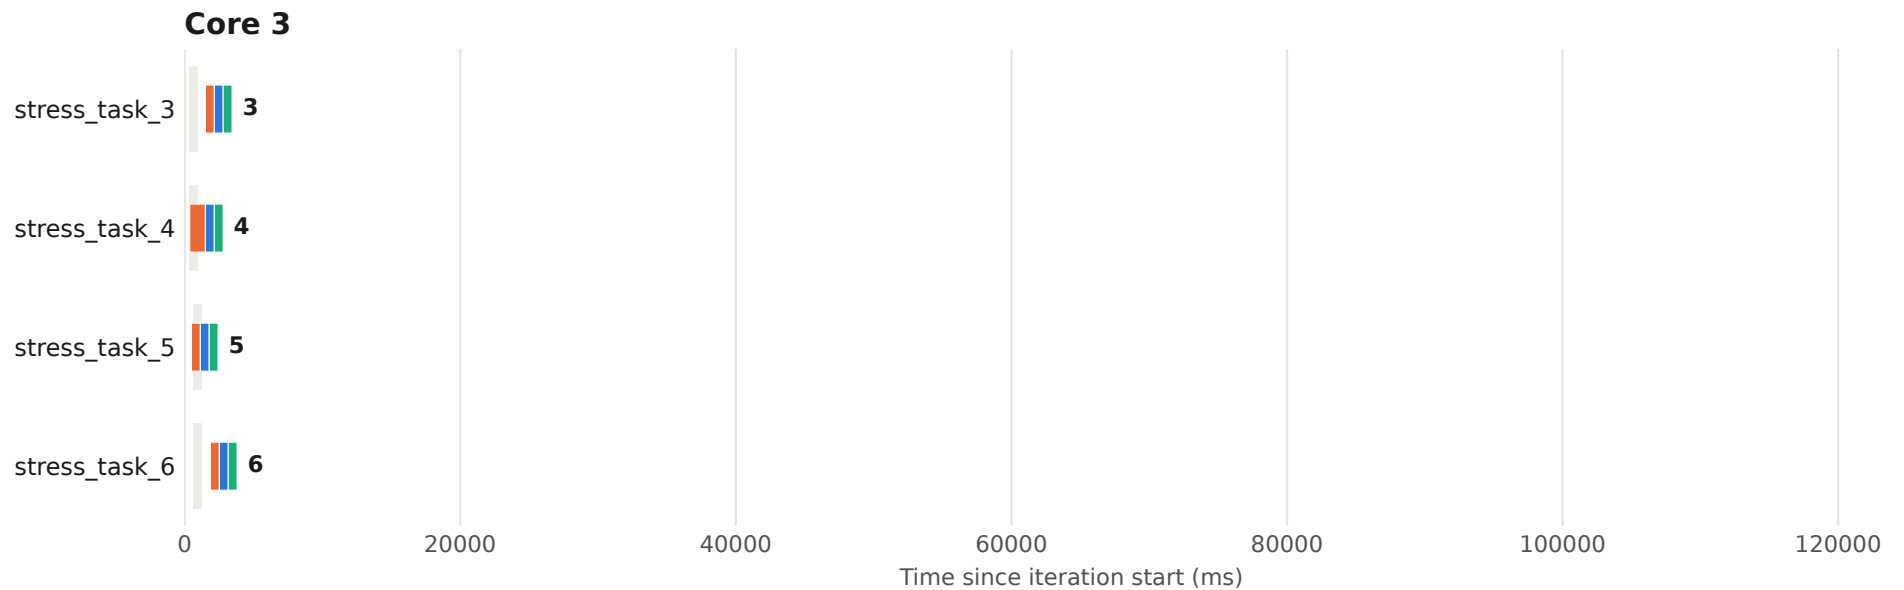

Execution plan - iteration 52 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

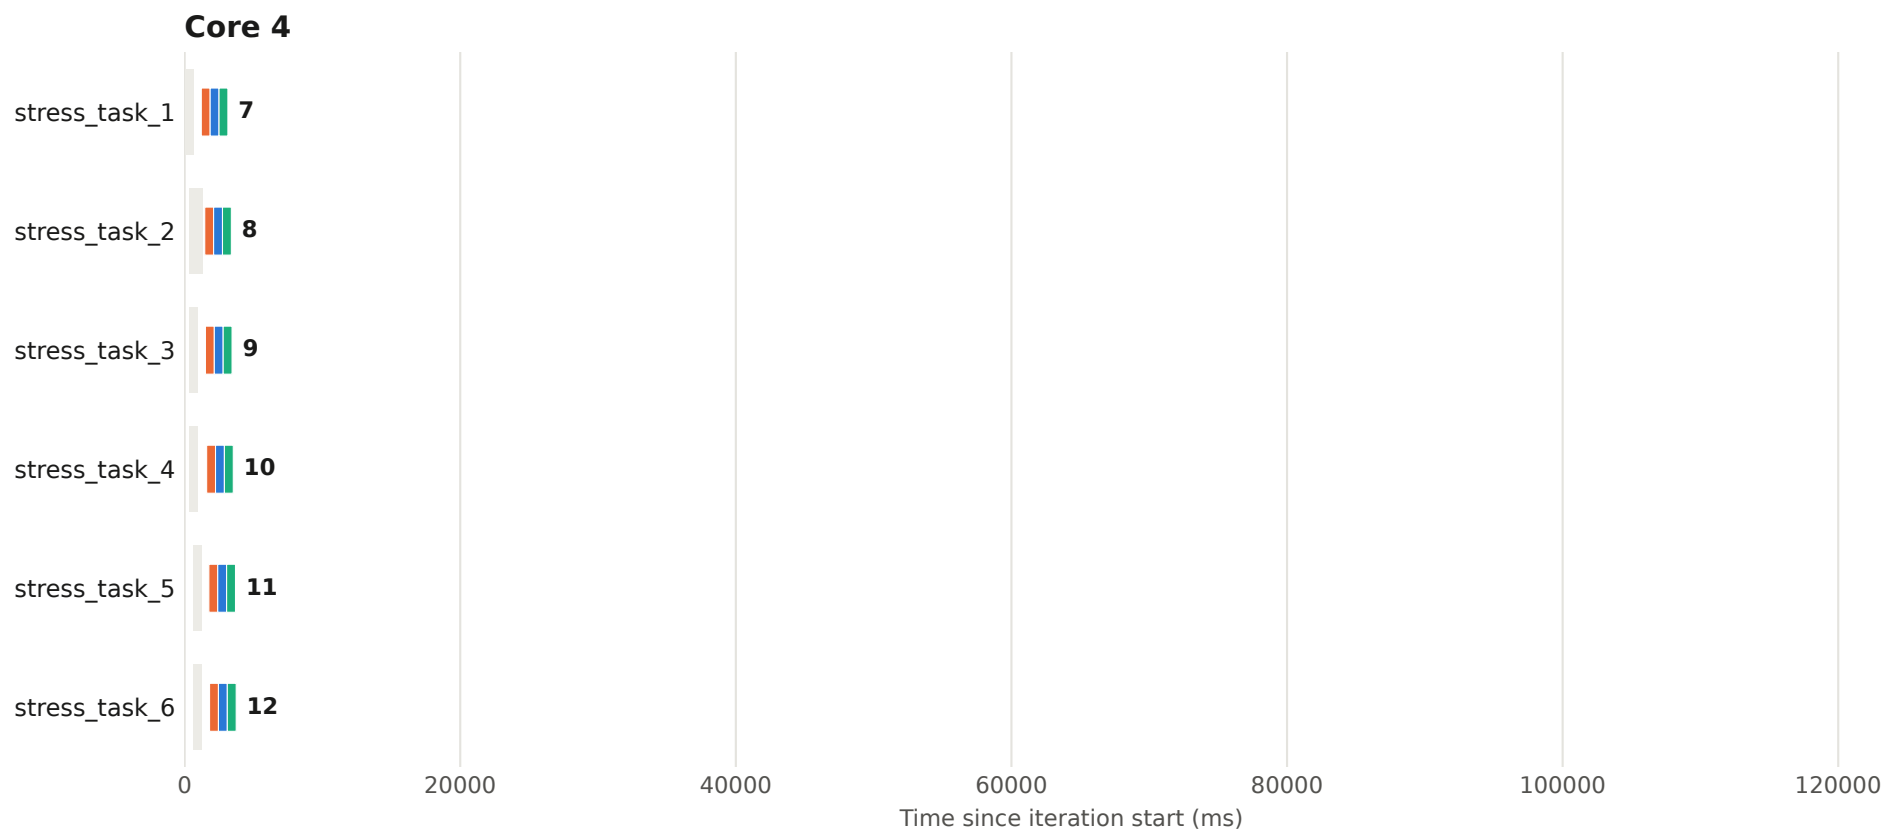


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 52 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

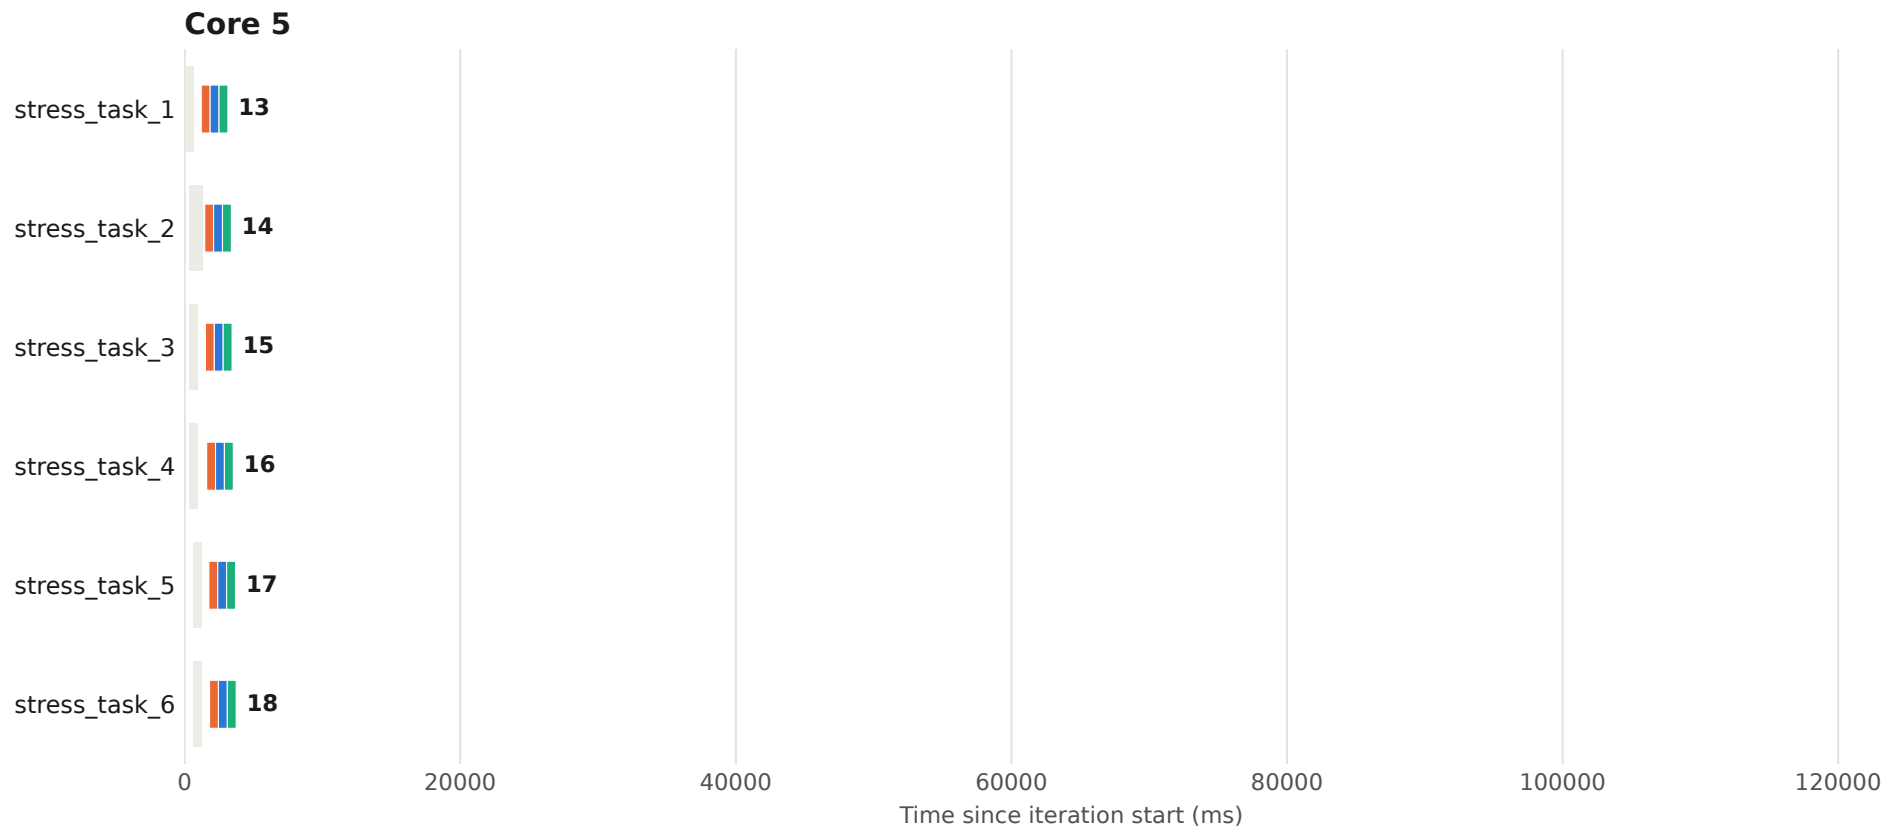


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 52 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

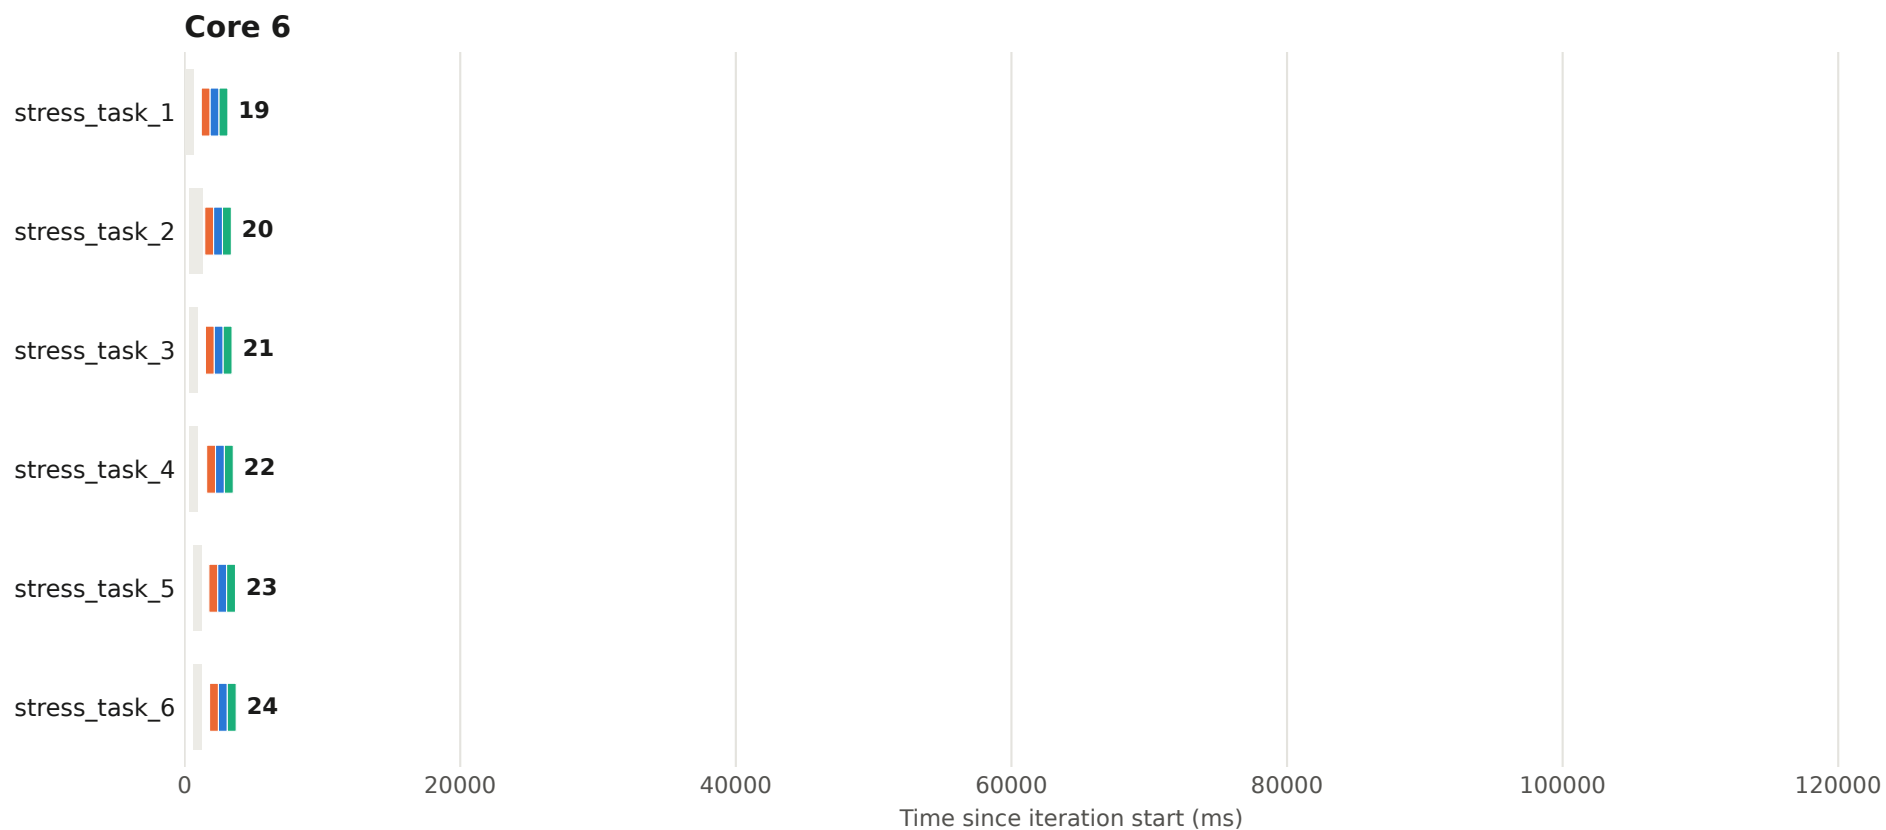


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 52 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

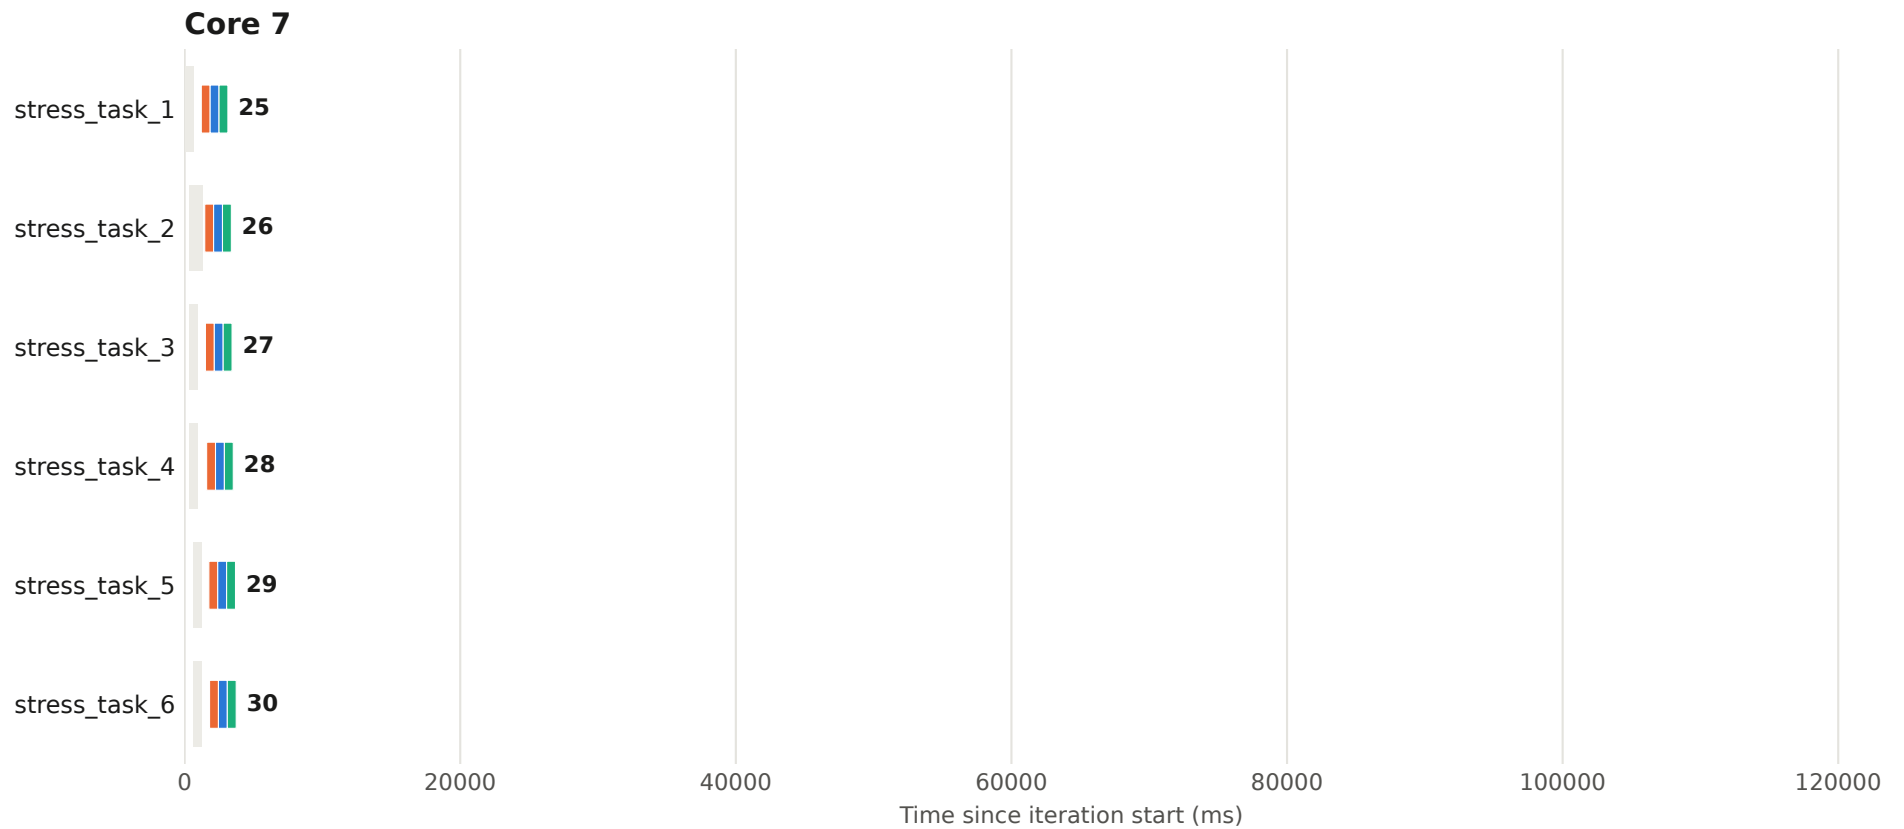


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 53 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

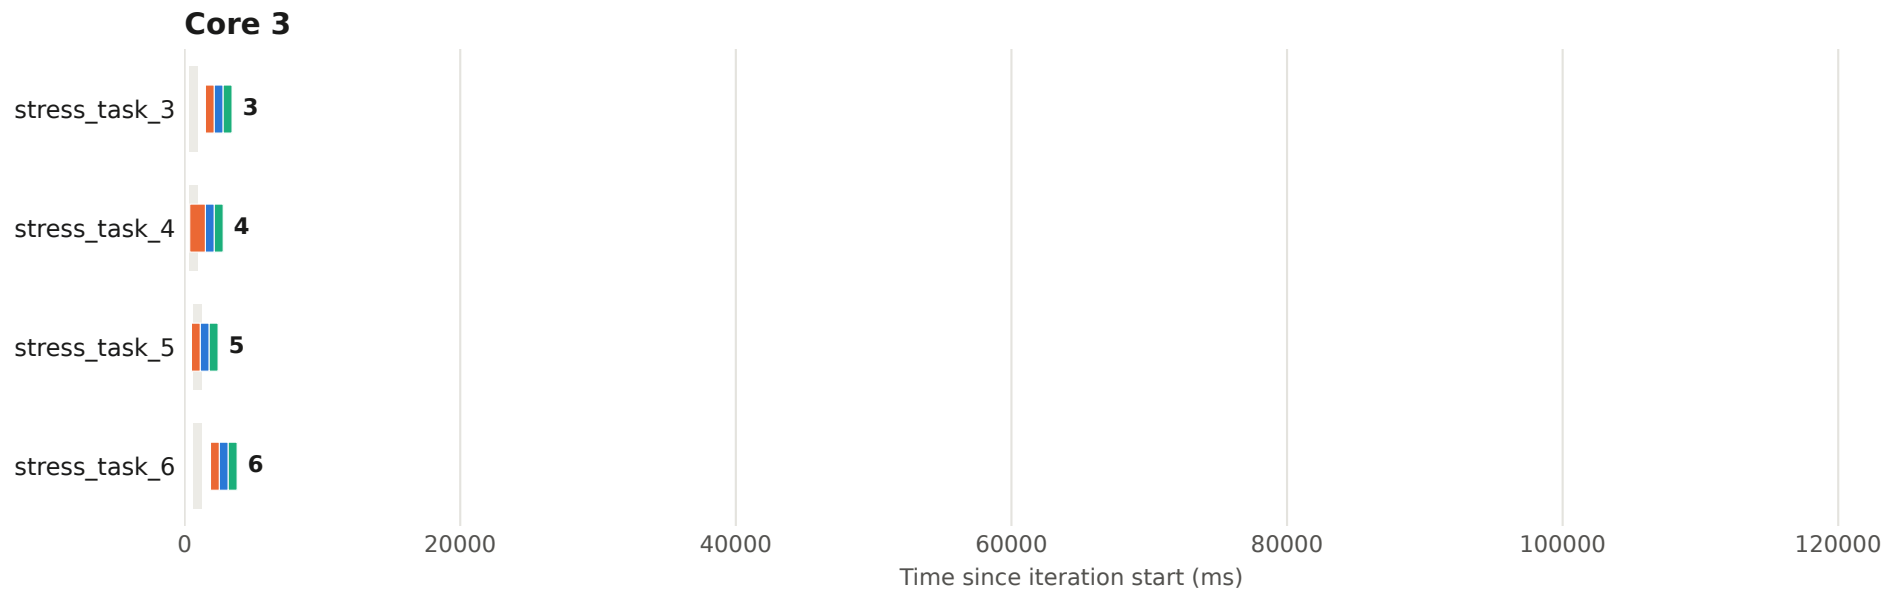


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 53 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

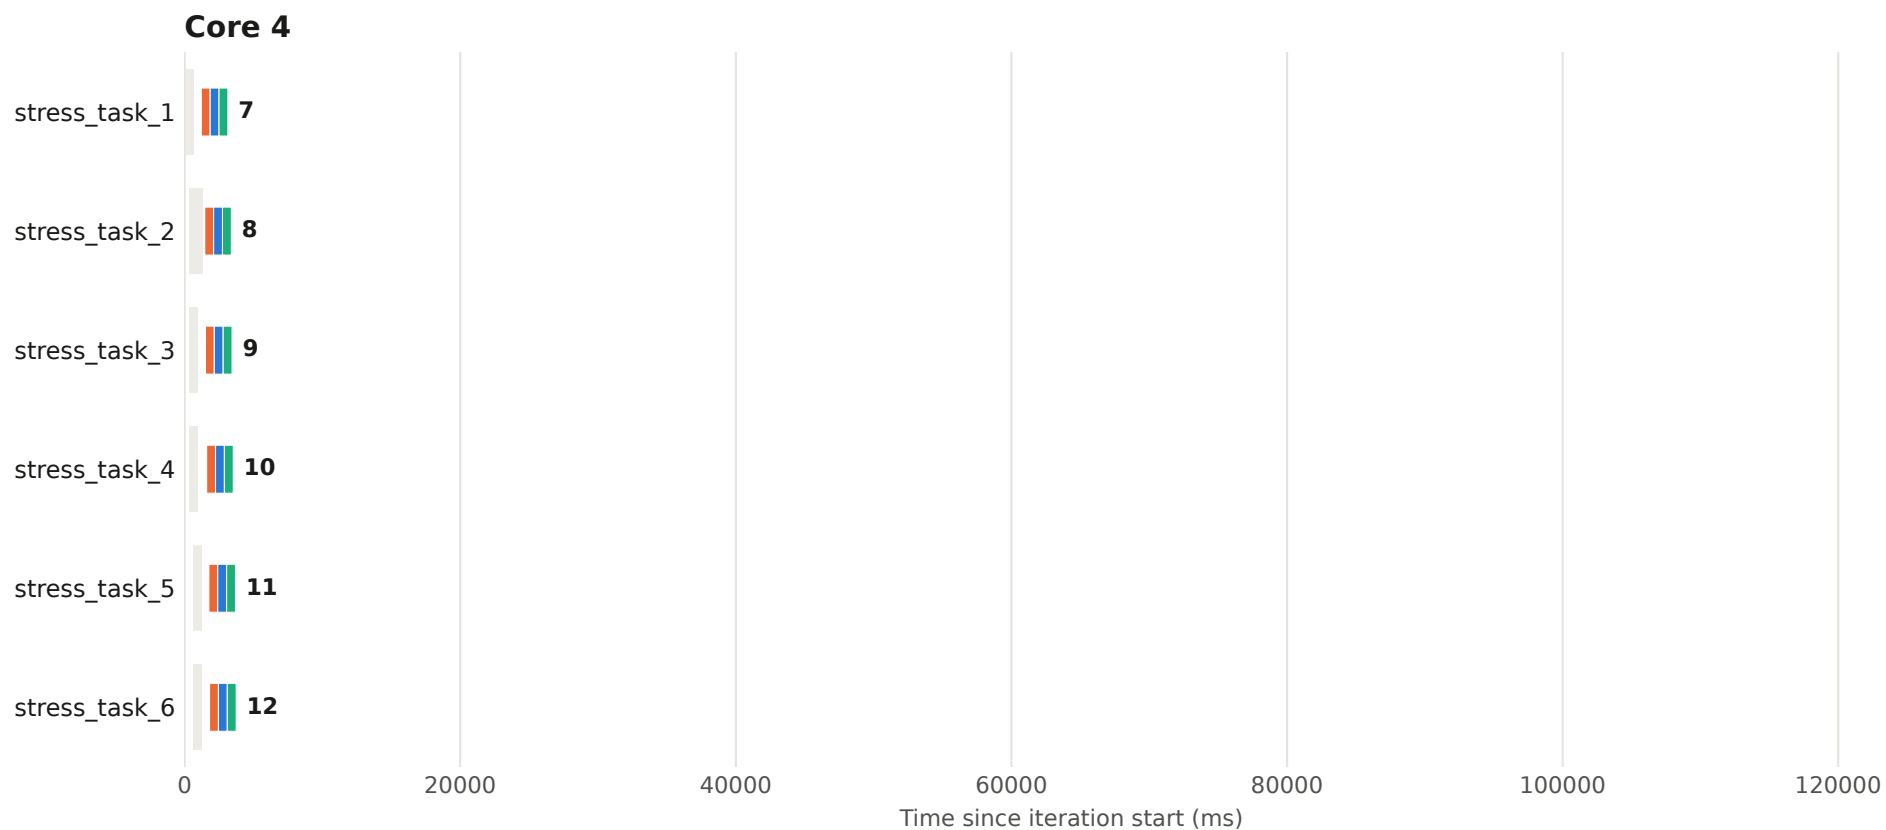


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 53 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

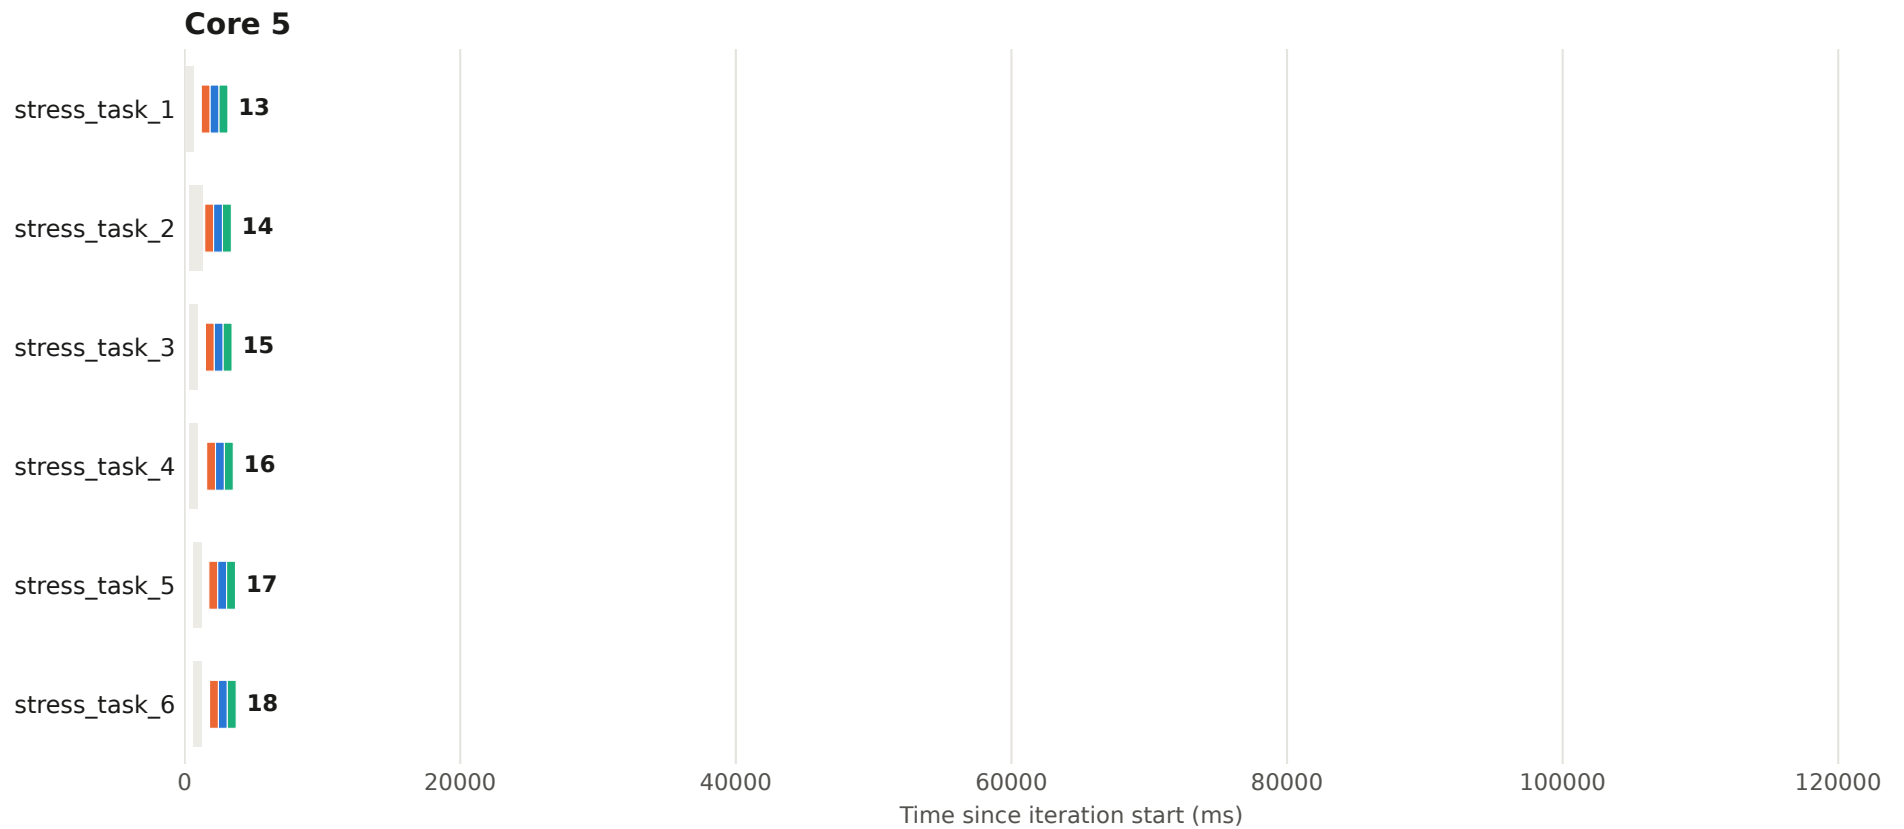


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 53 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

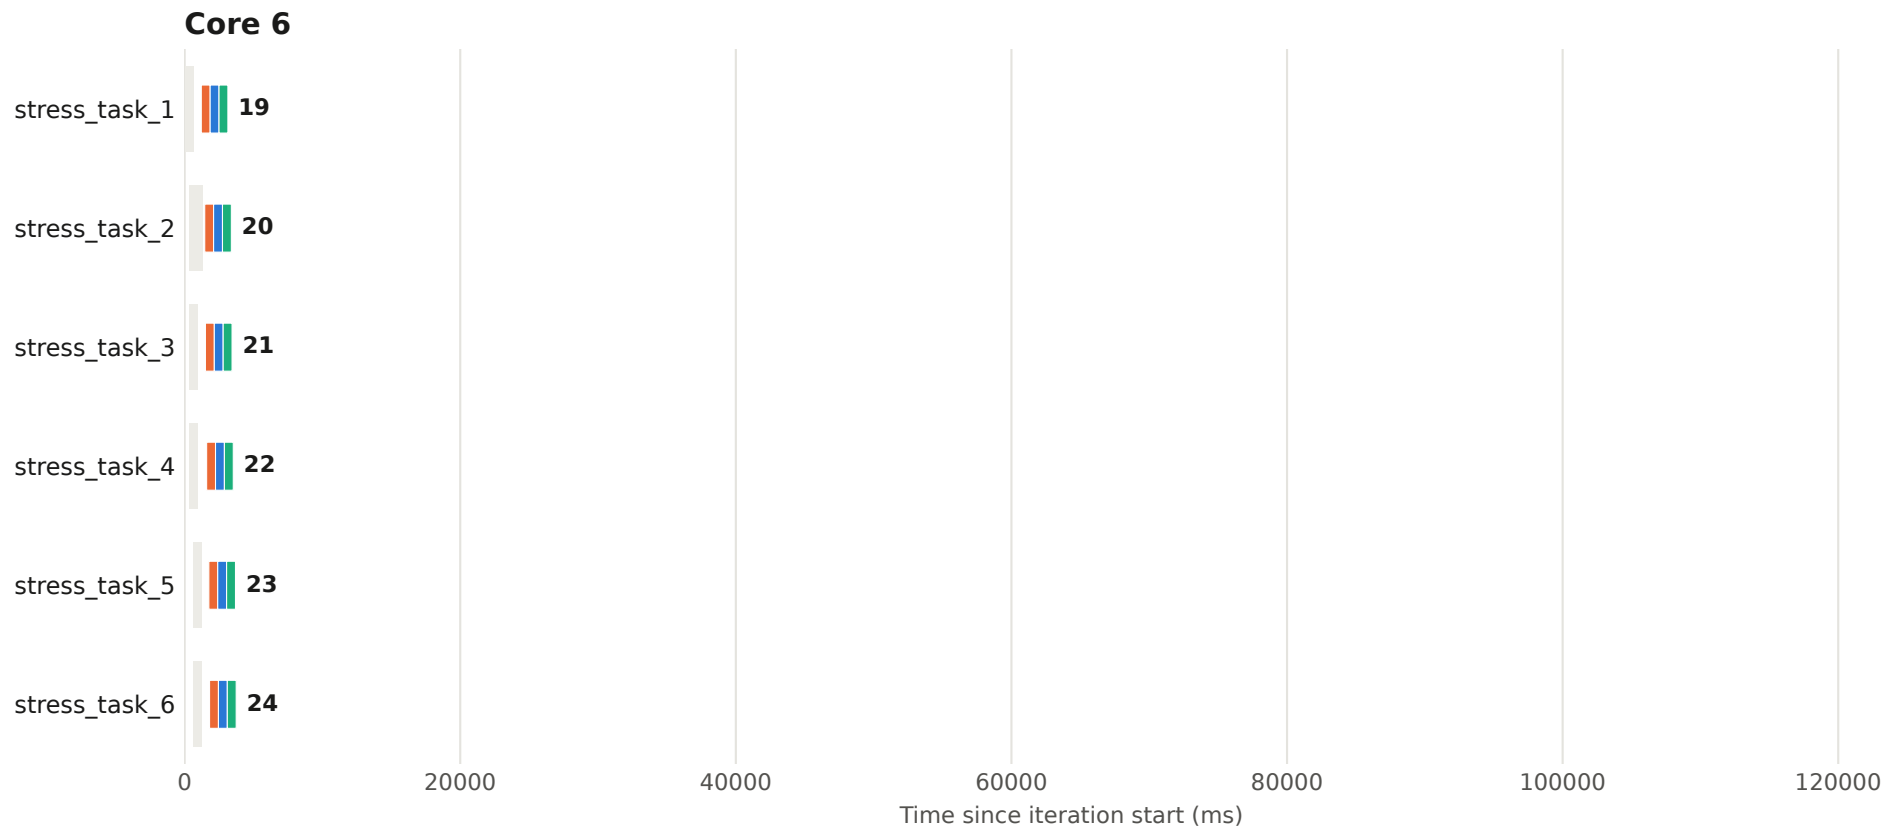


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 53 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

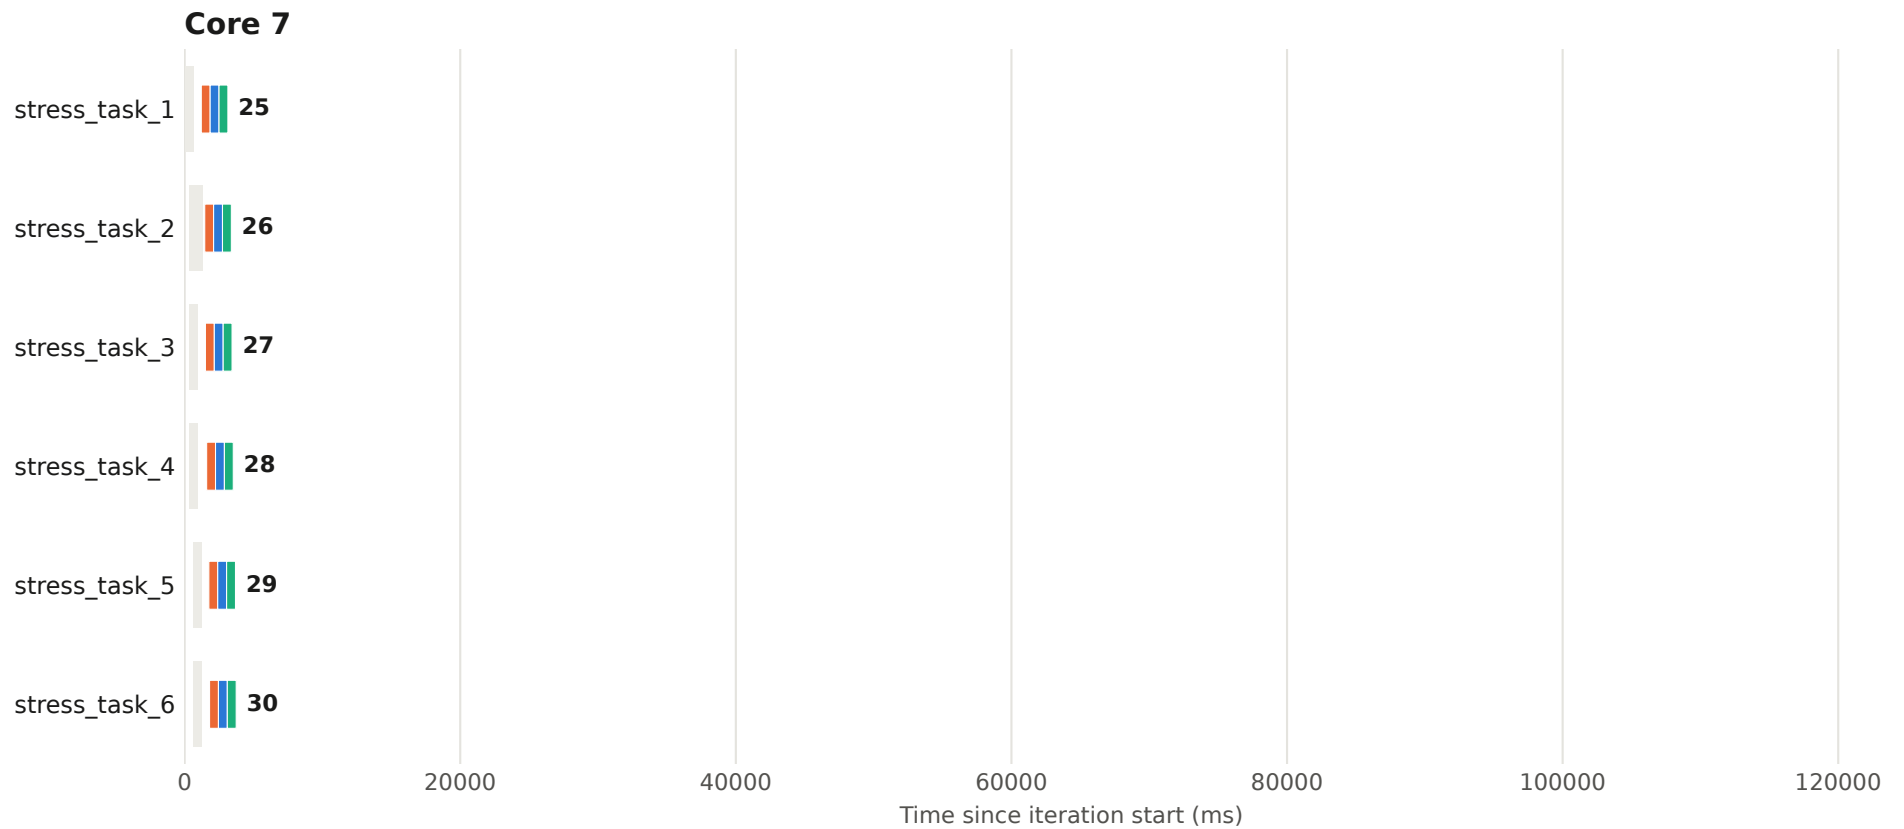


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 54 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

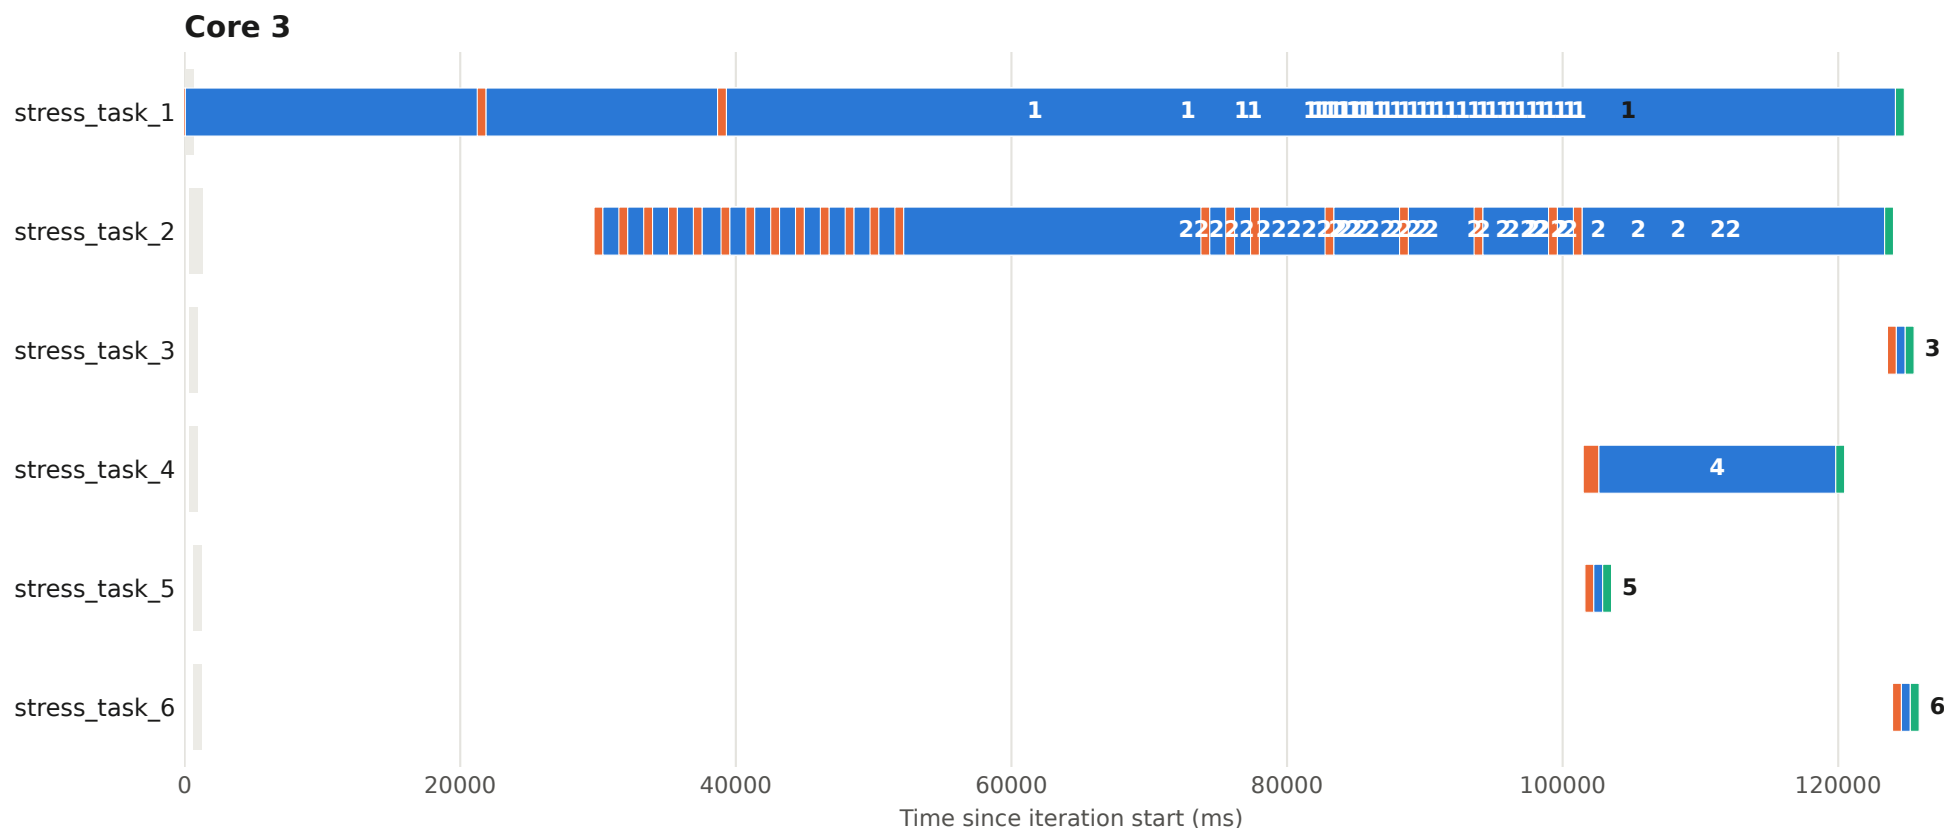


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 54 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

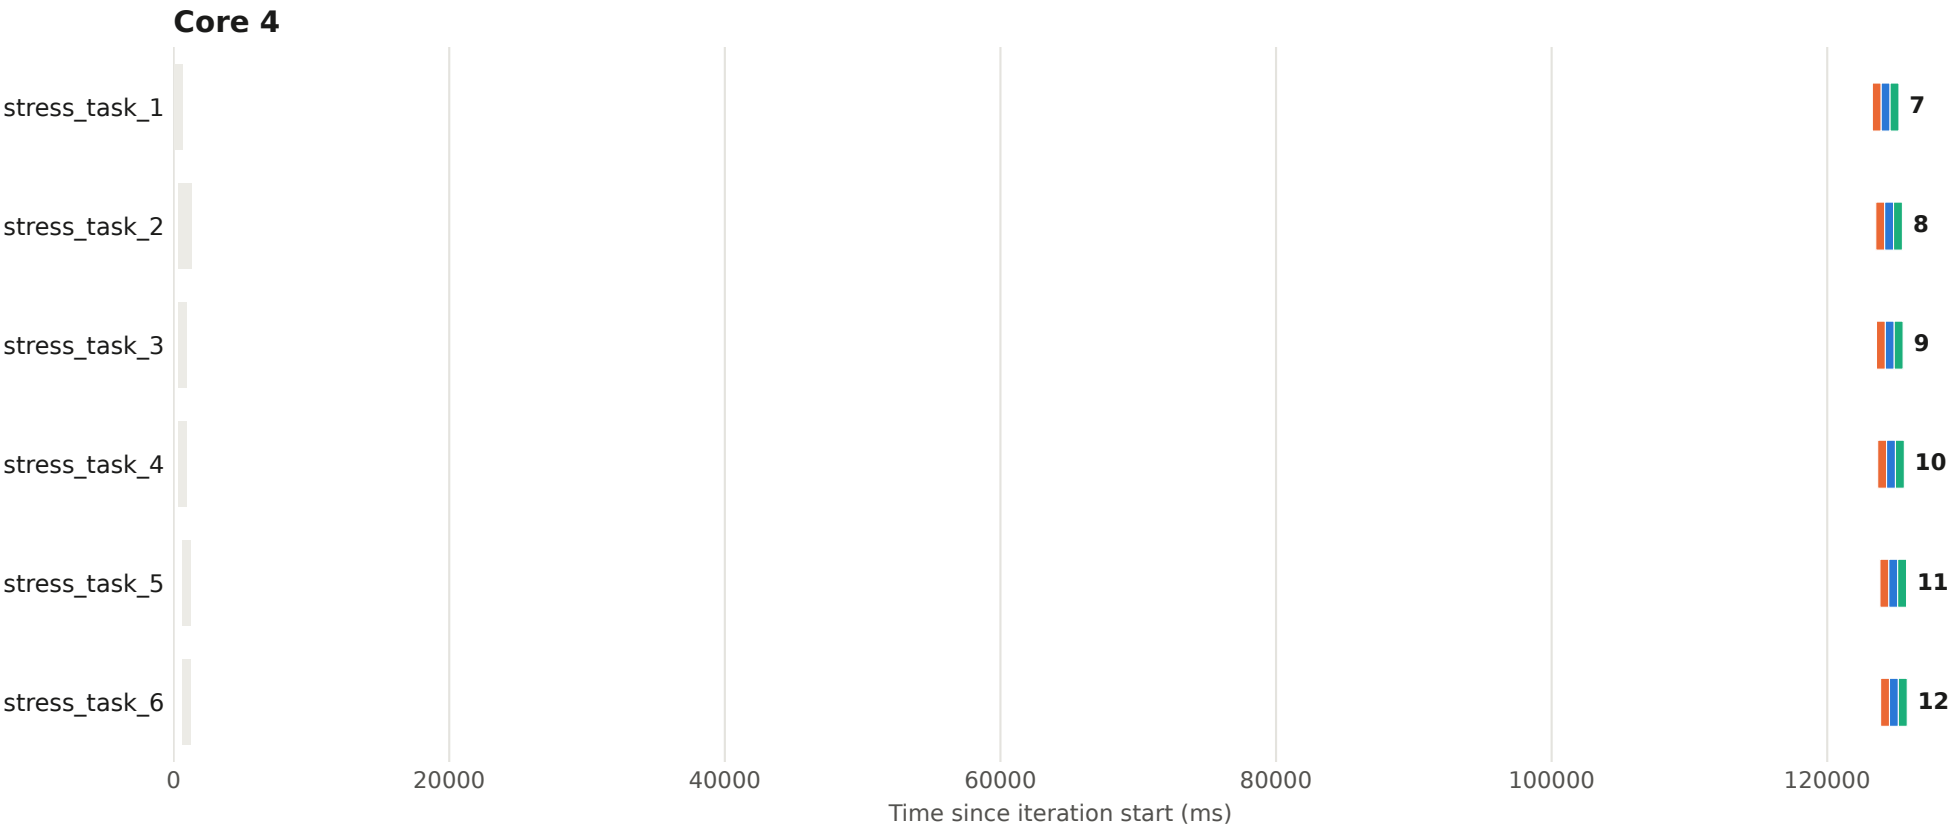


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 54 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

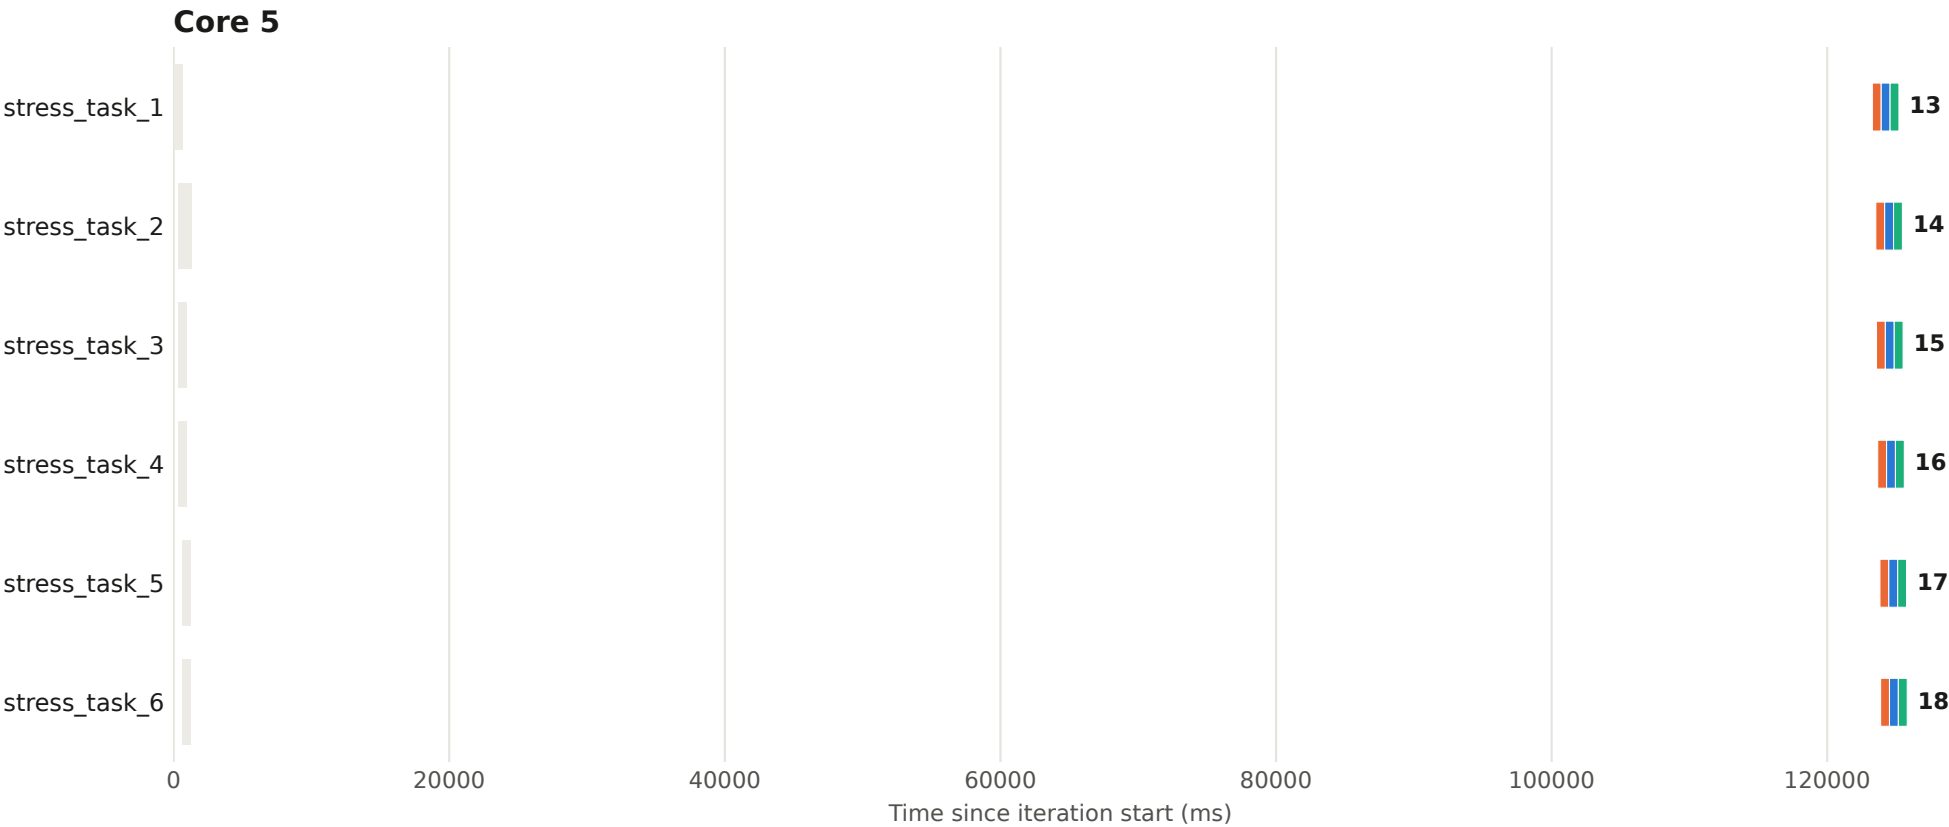


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 54 - core 6

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

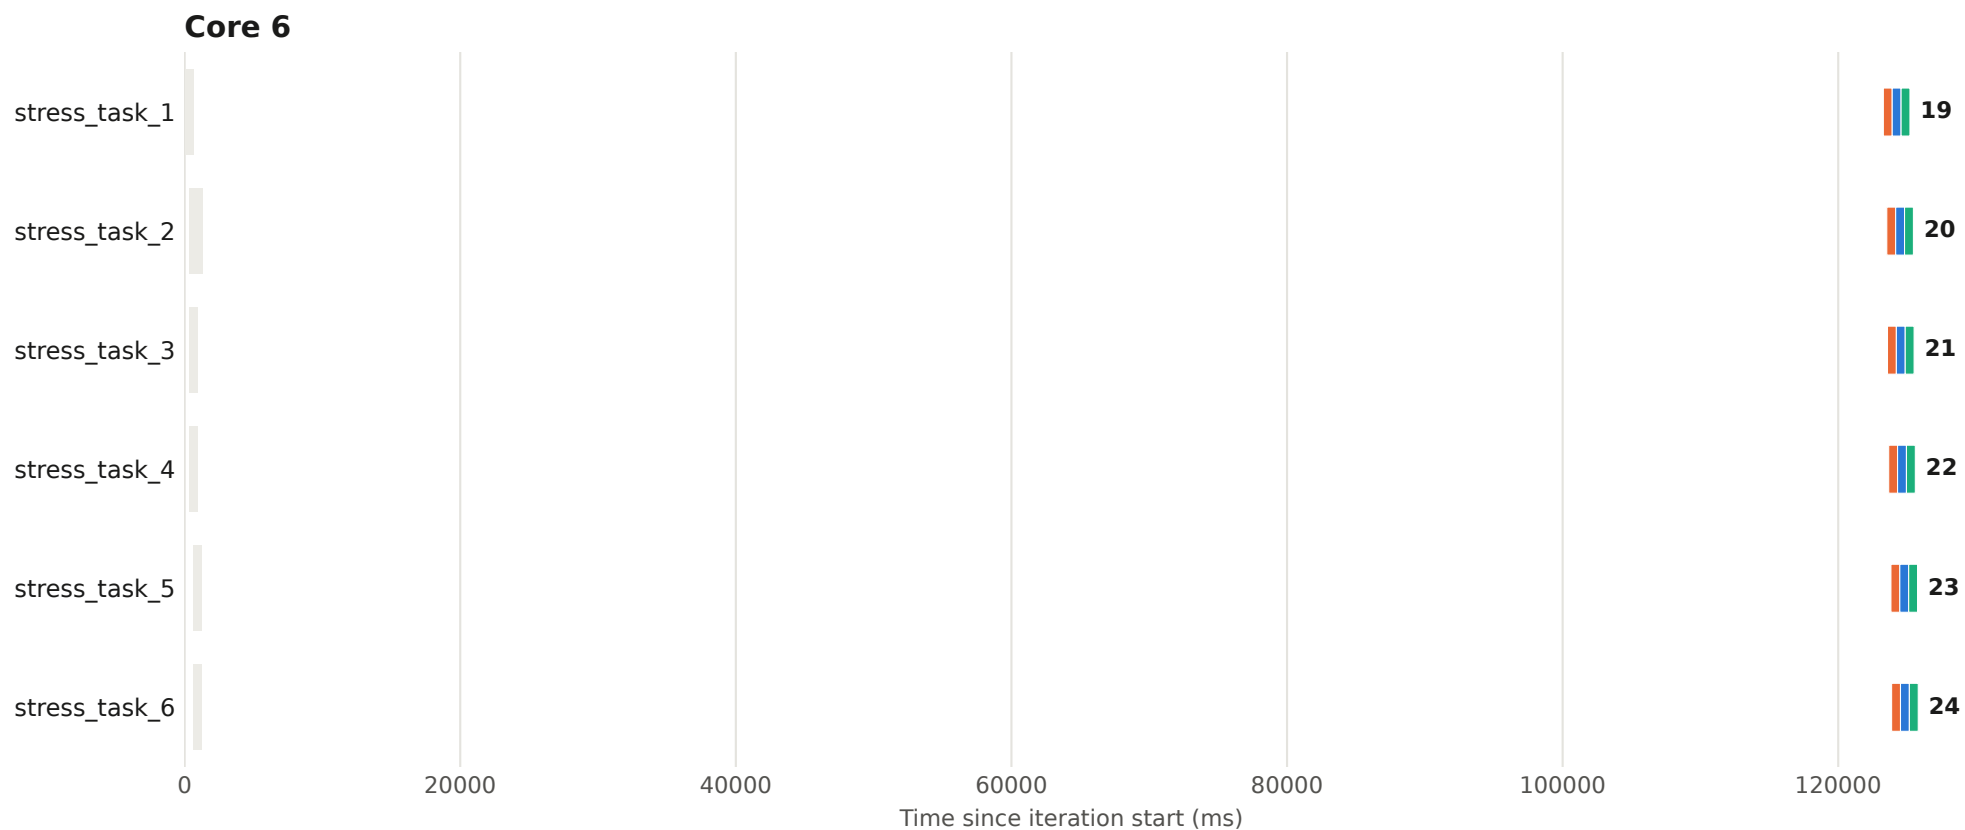

Execution plan - iteration 54 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

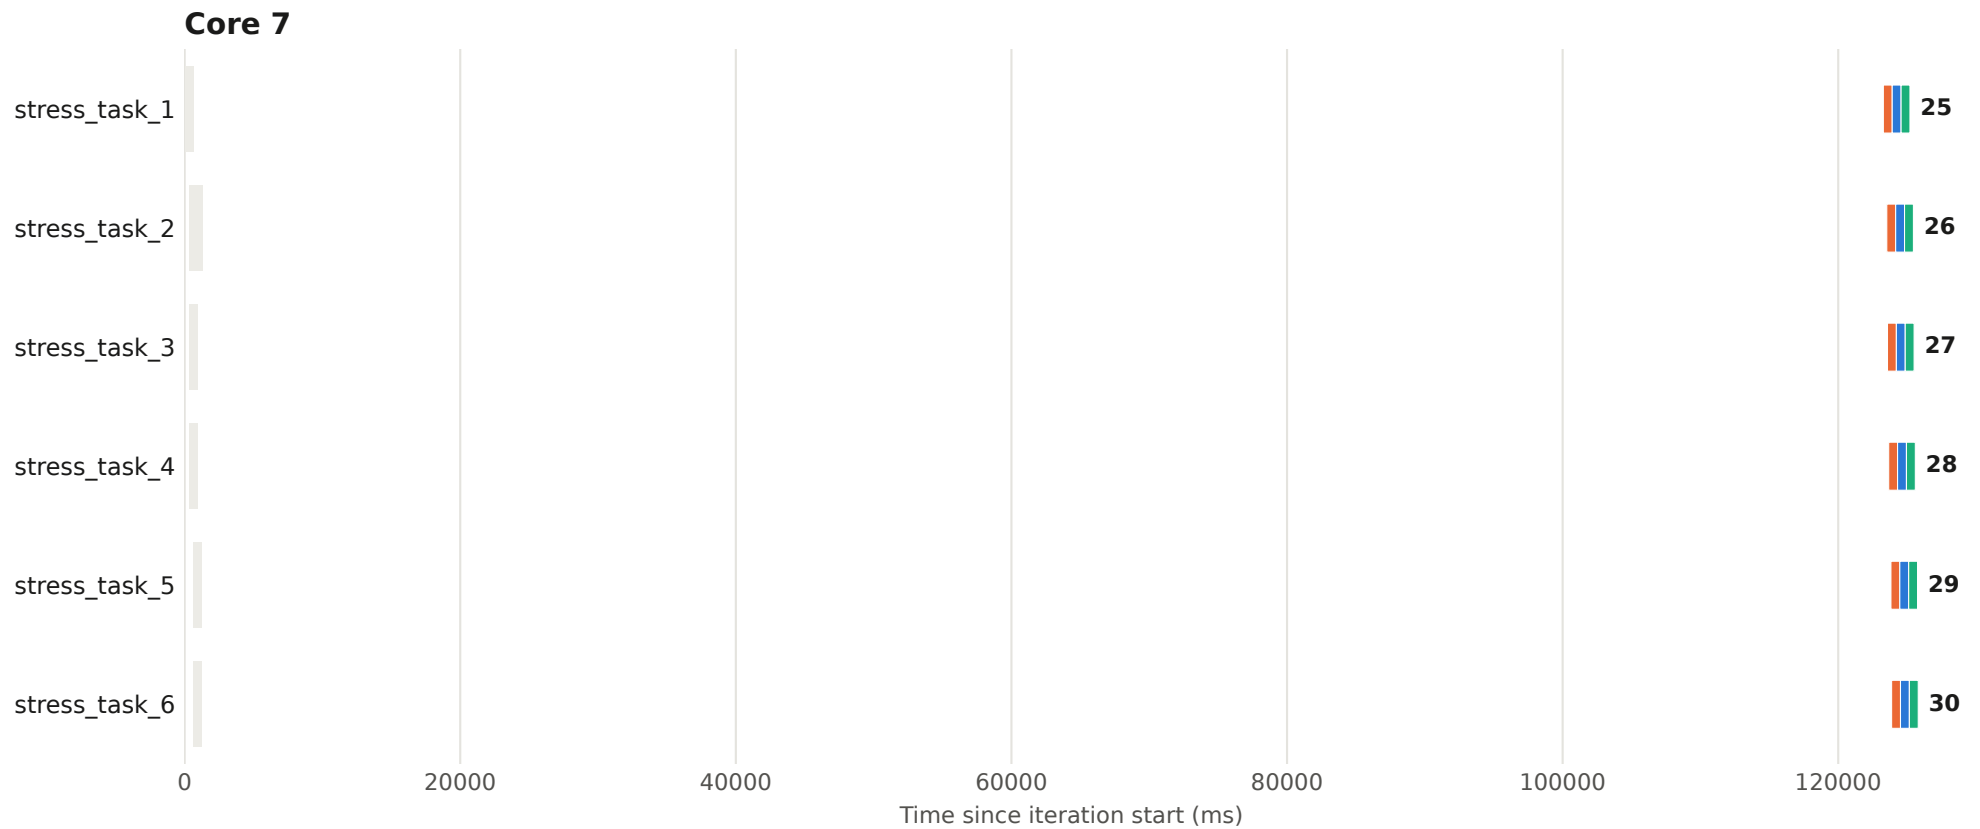


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 55 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

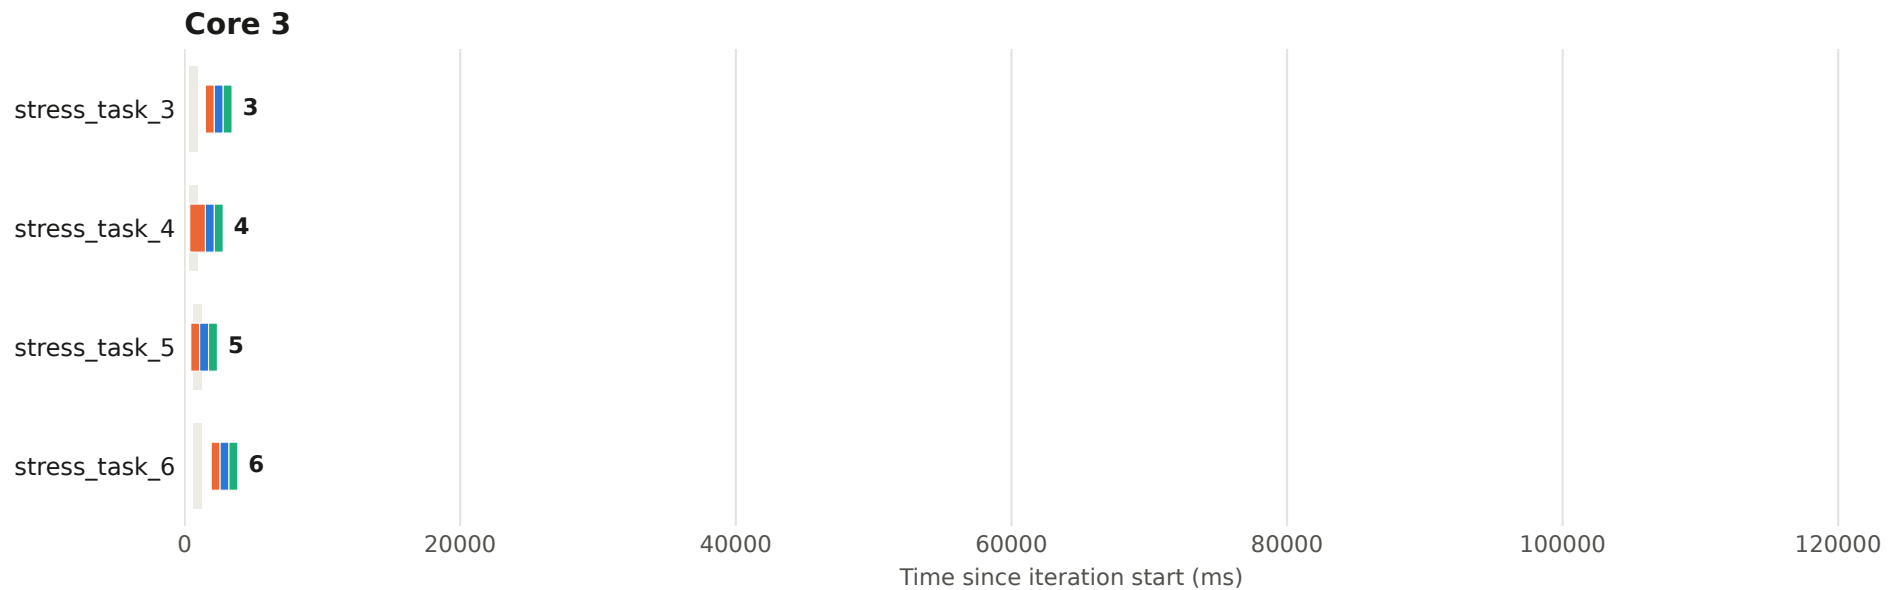

Execution plan - iteration 55 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

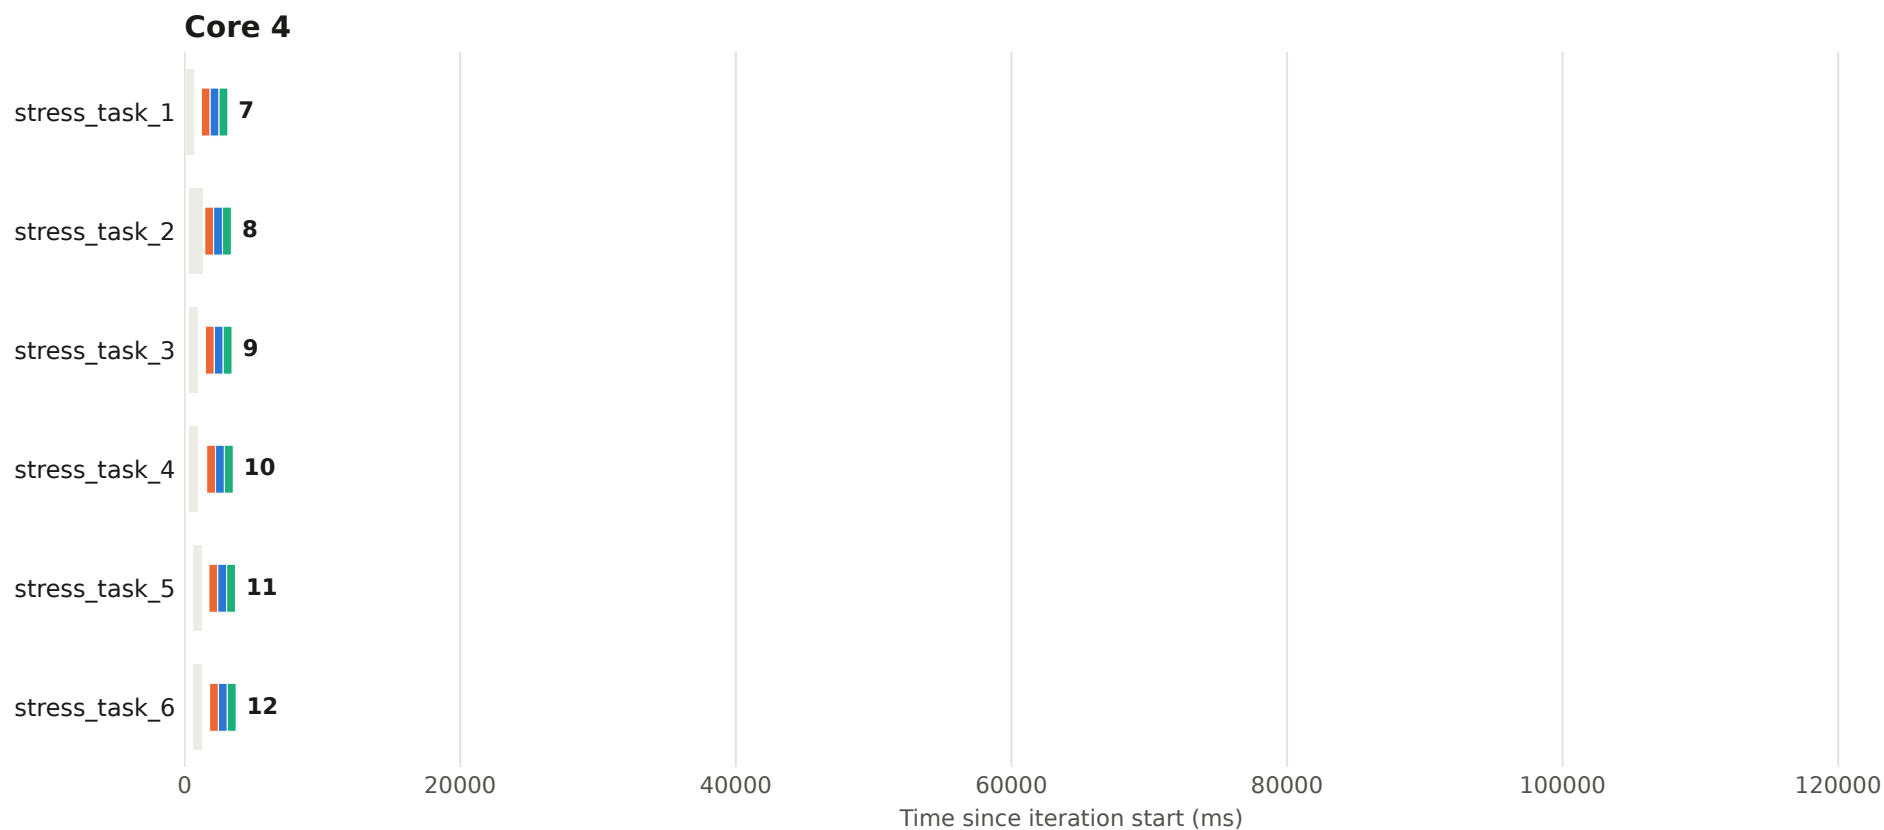


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 55 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

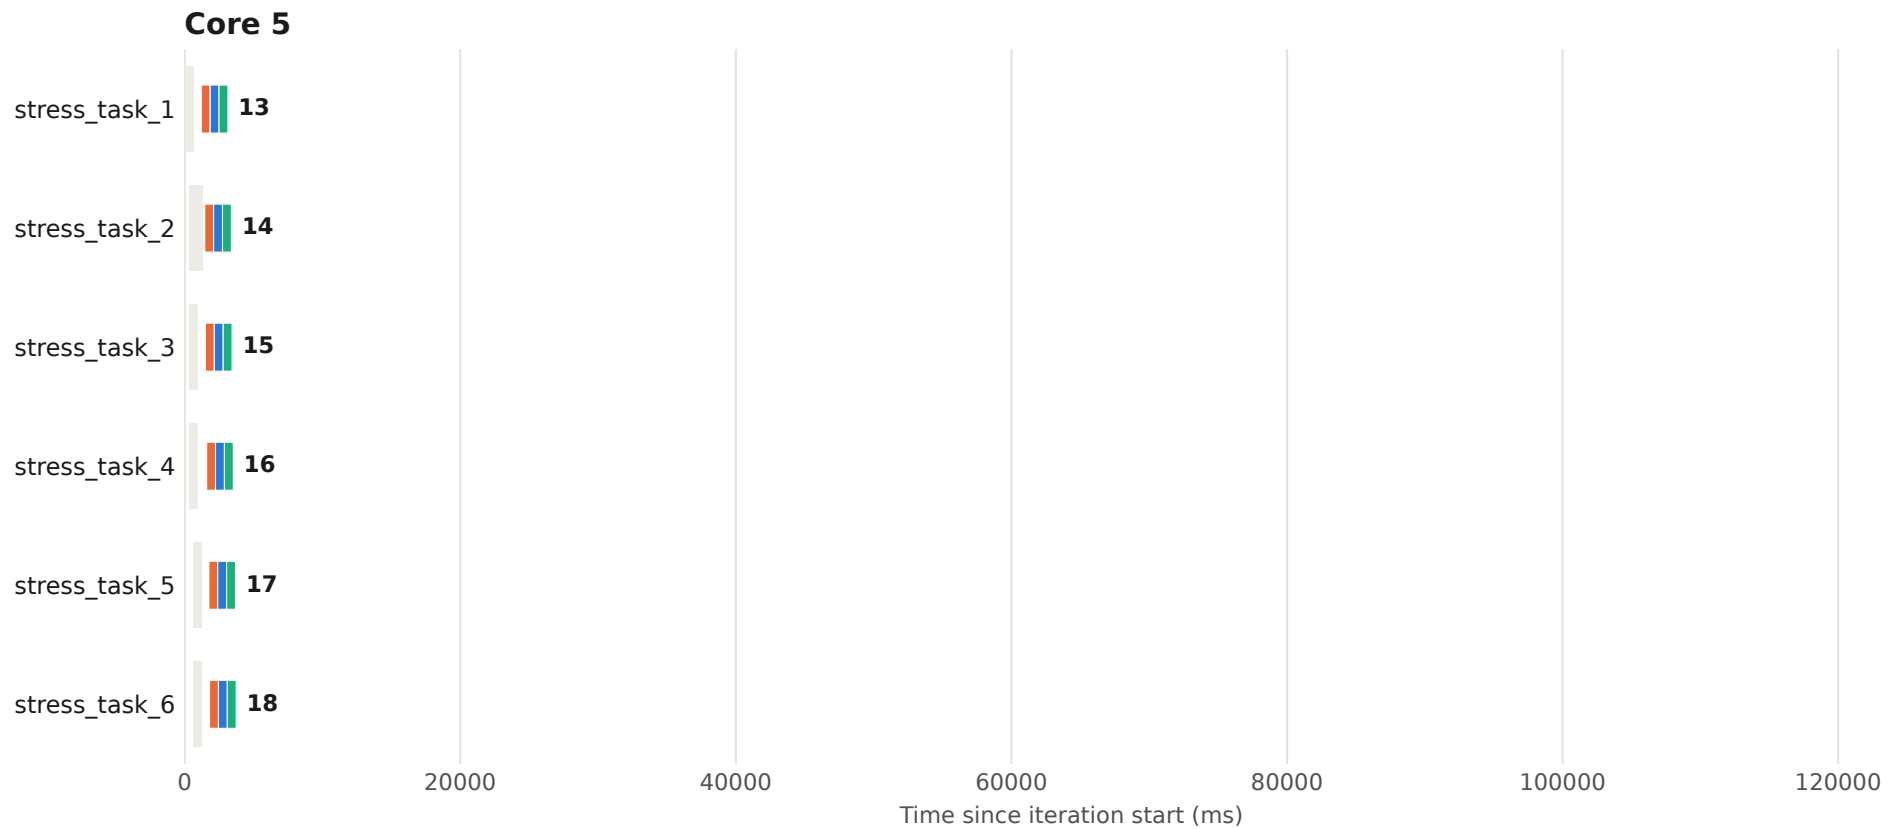


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 55 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

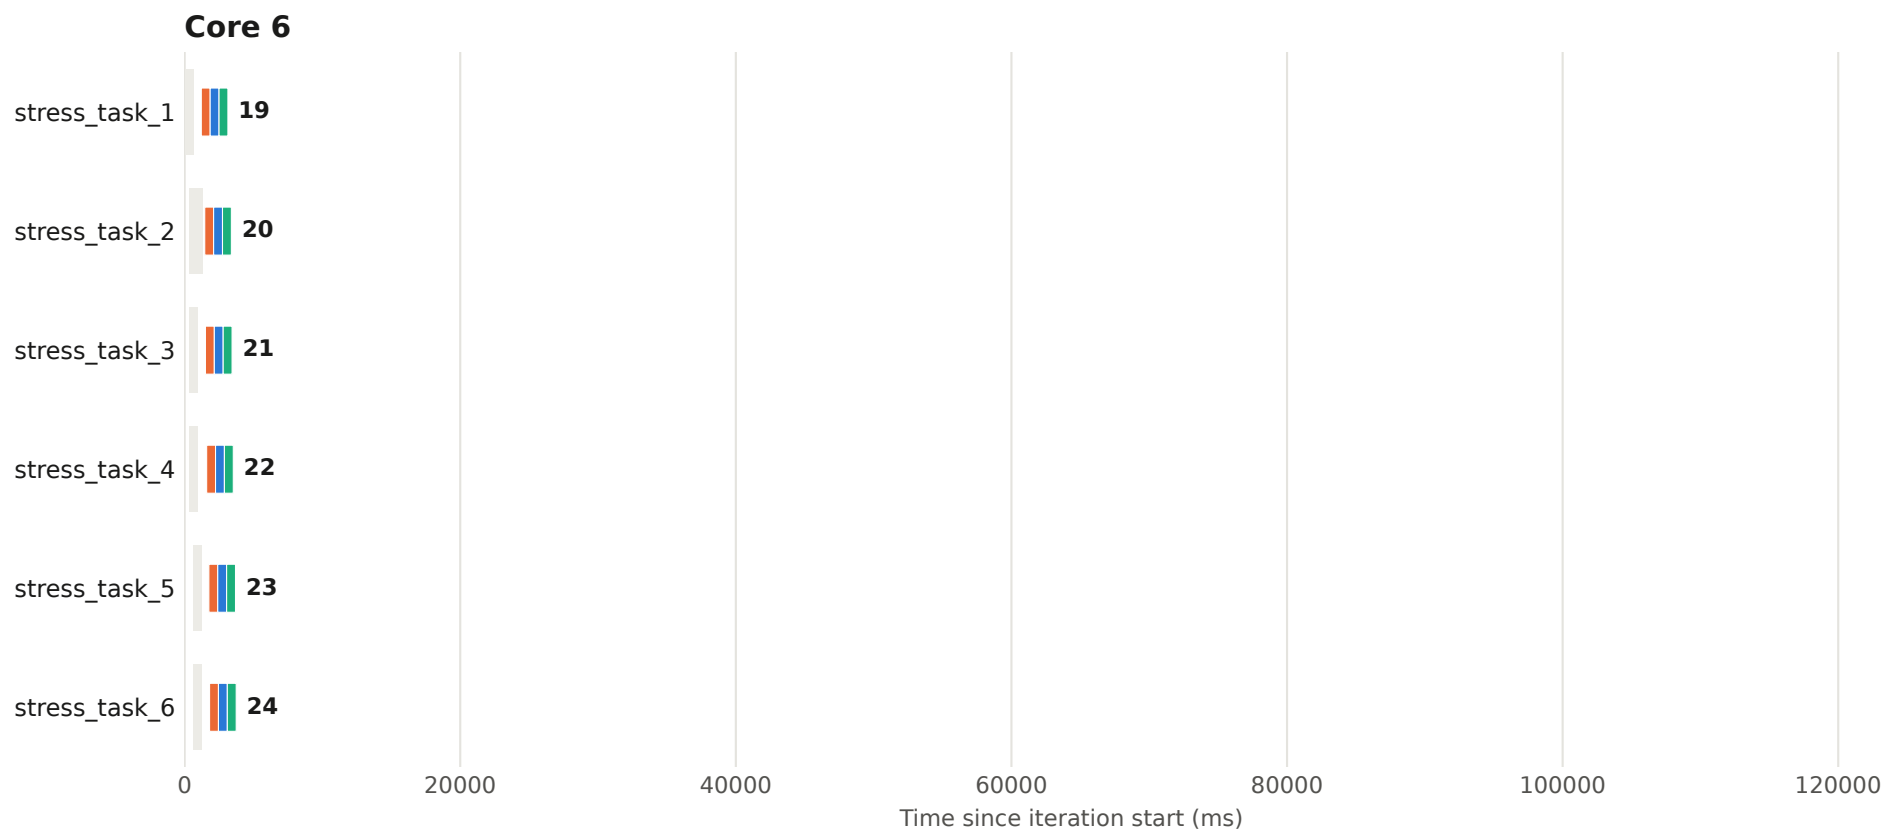


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 55 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

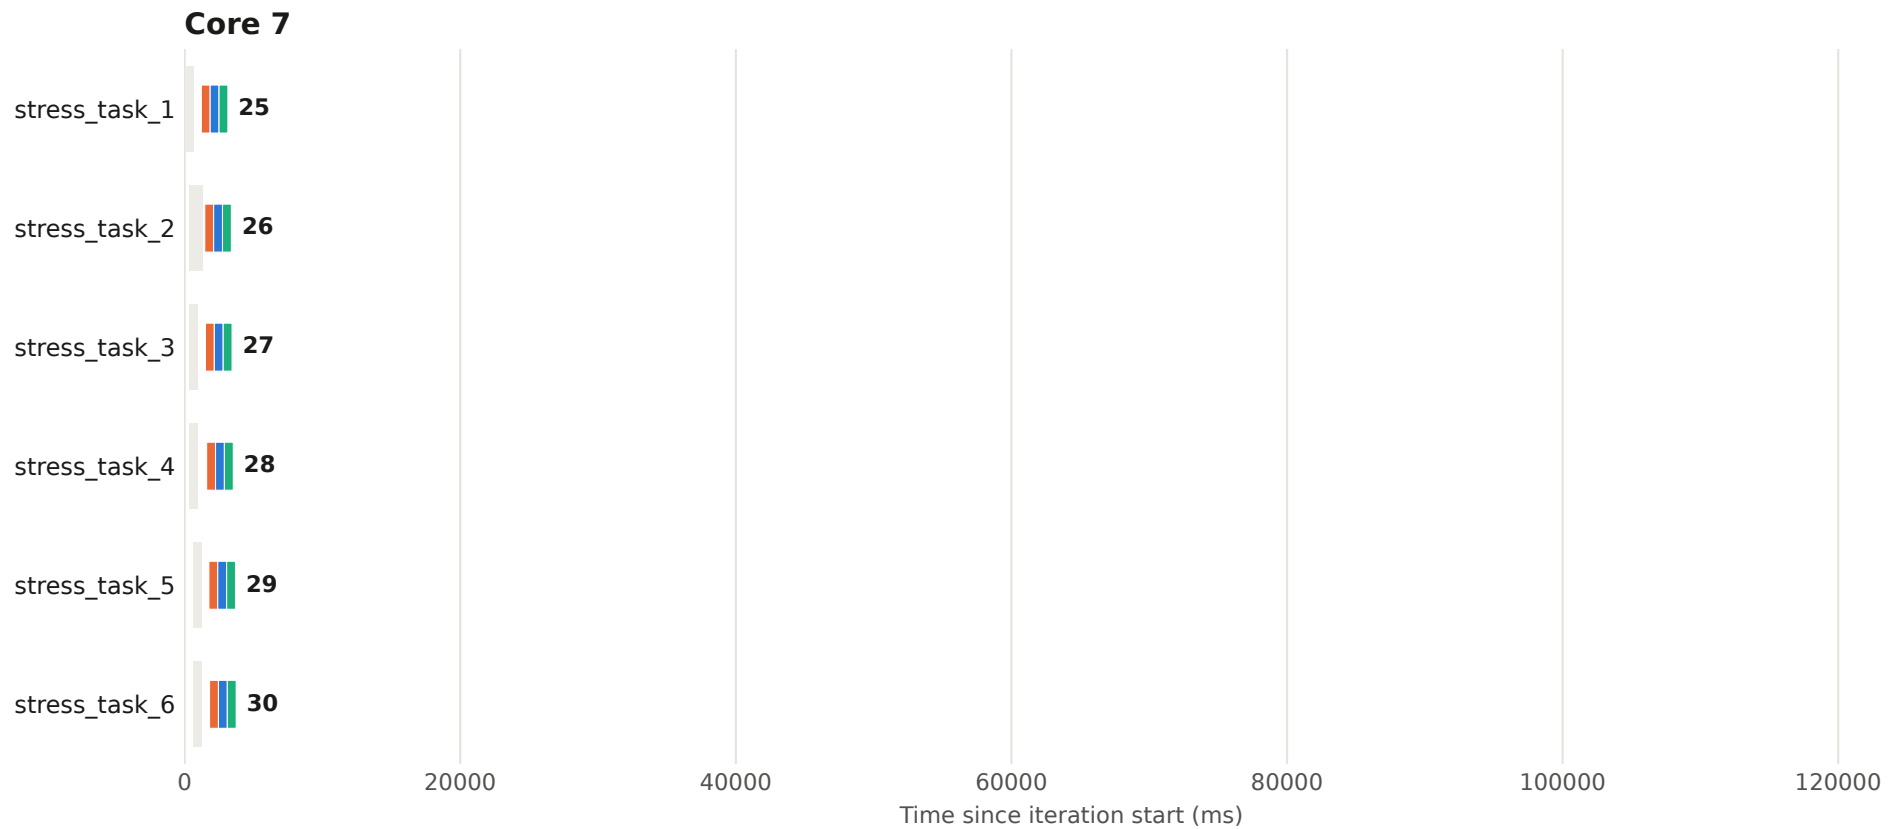


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 56 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

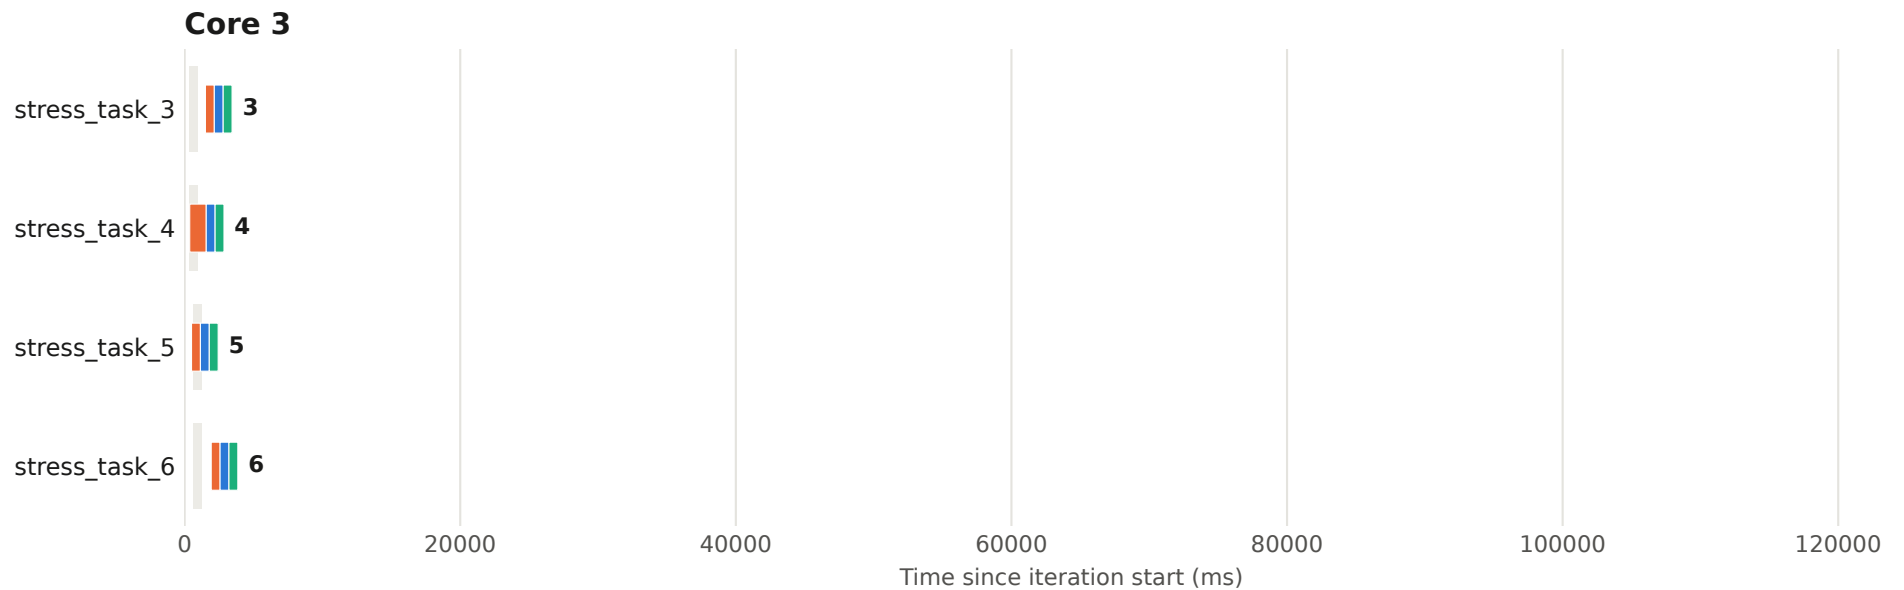

Execution plan - iteration 56 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

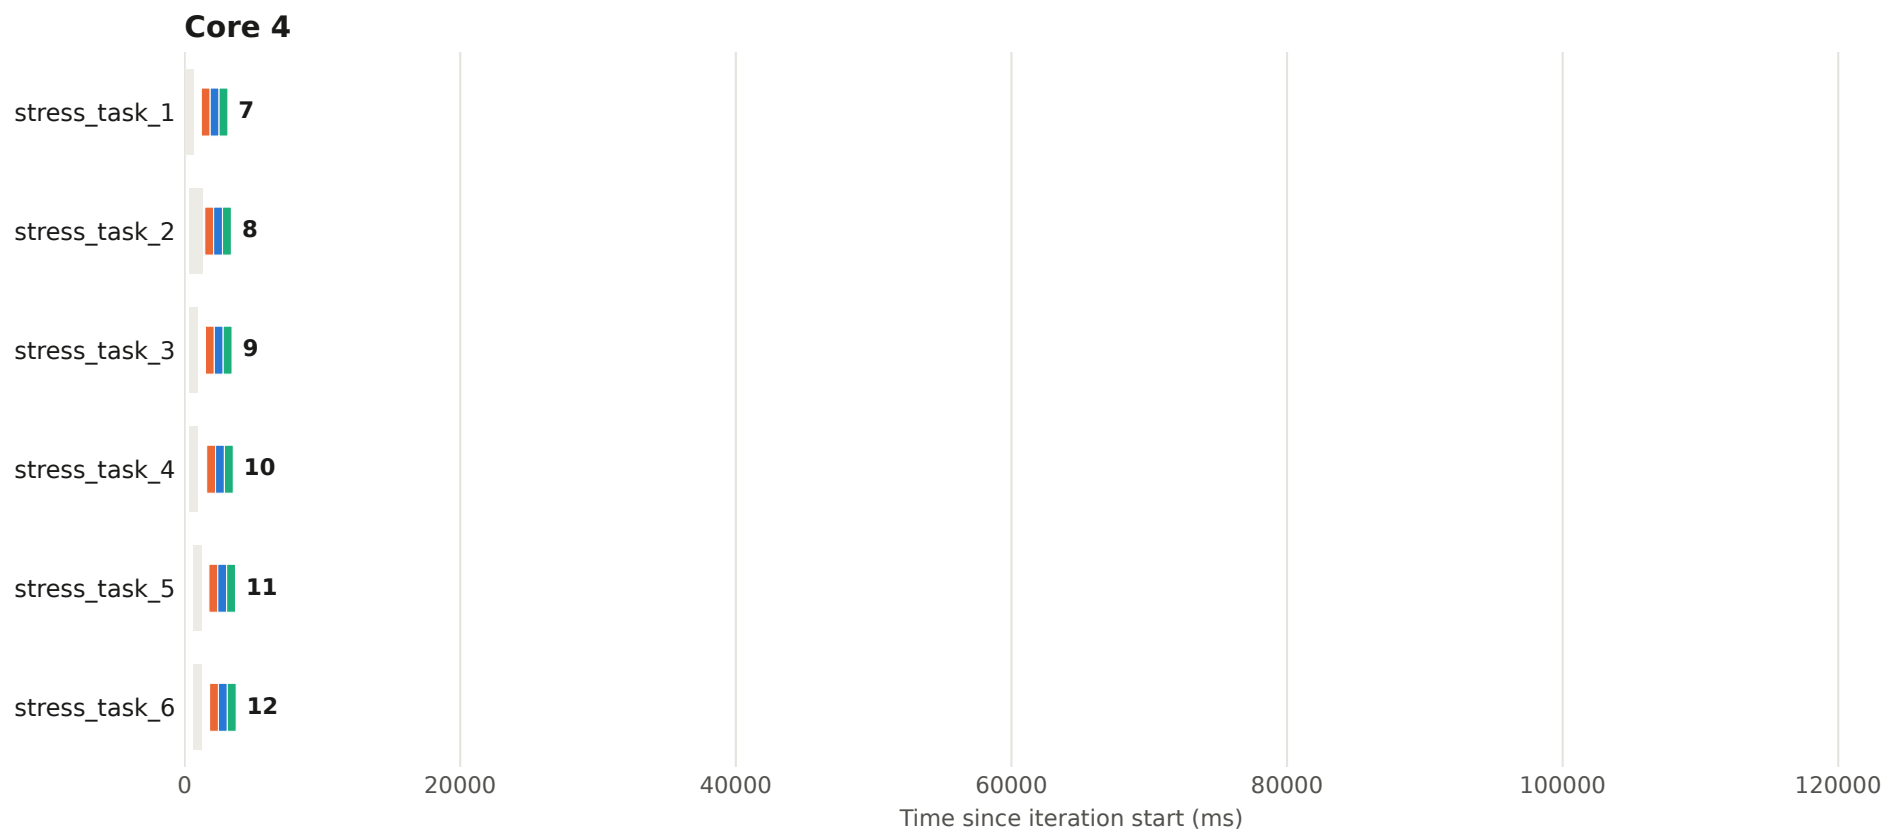


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 56 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

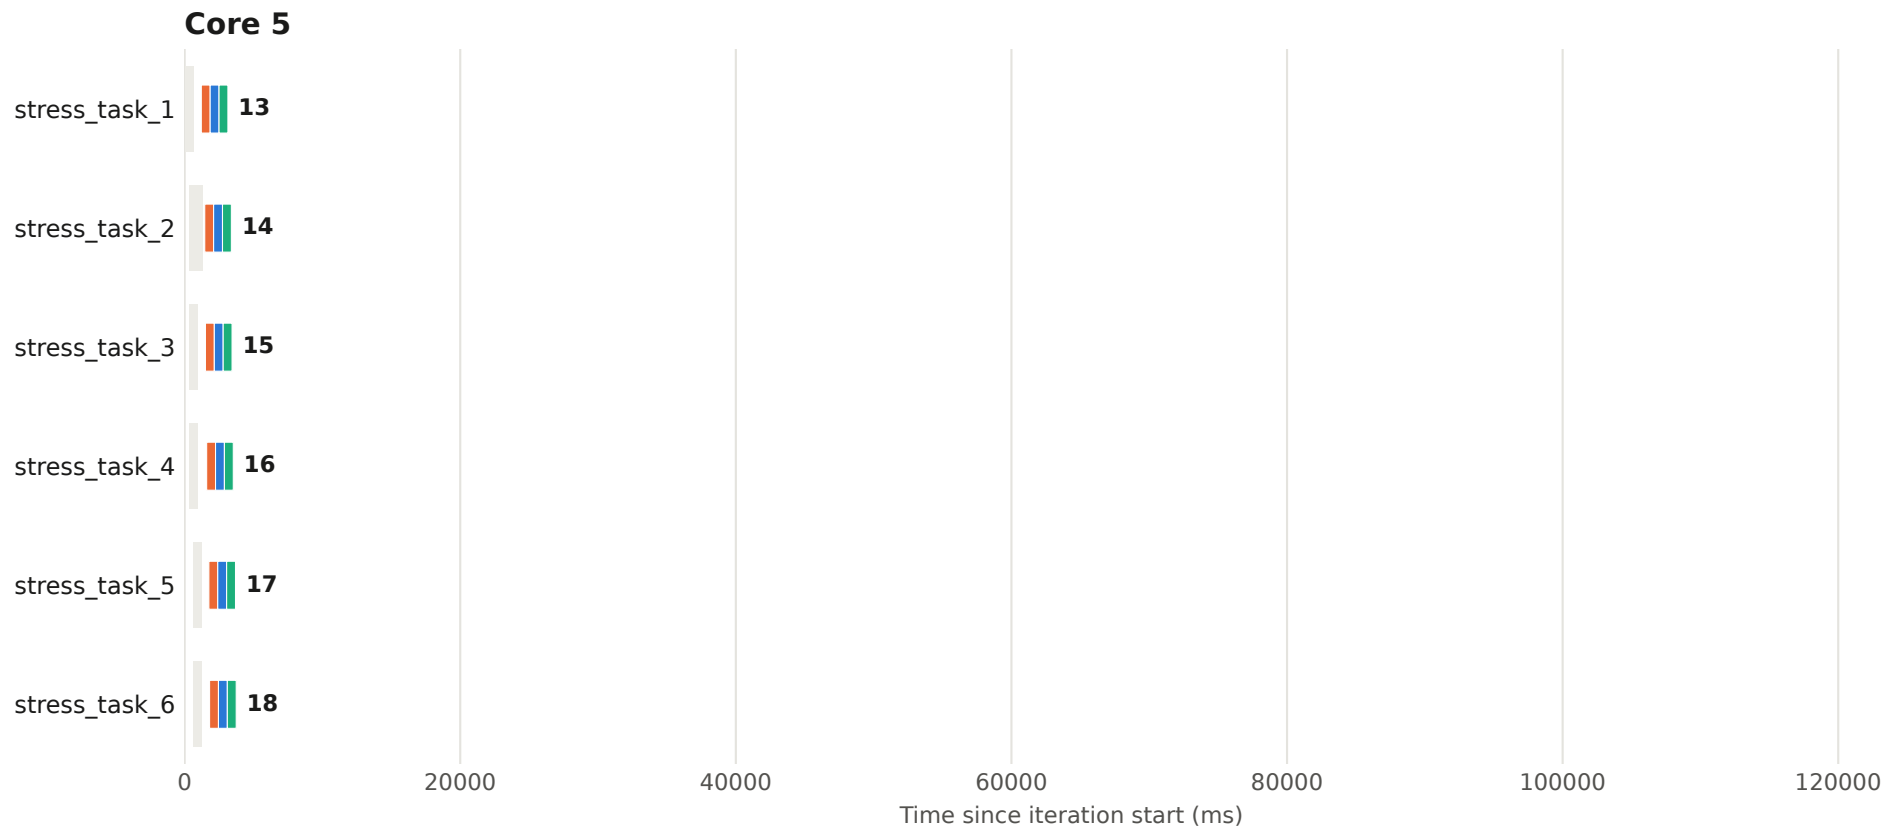


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 56 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

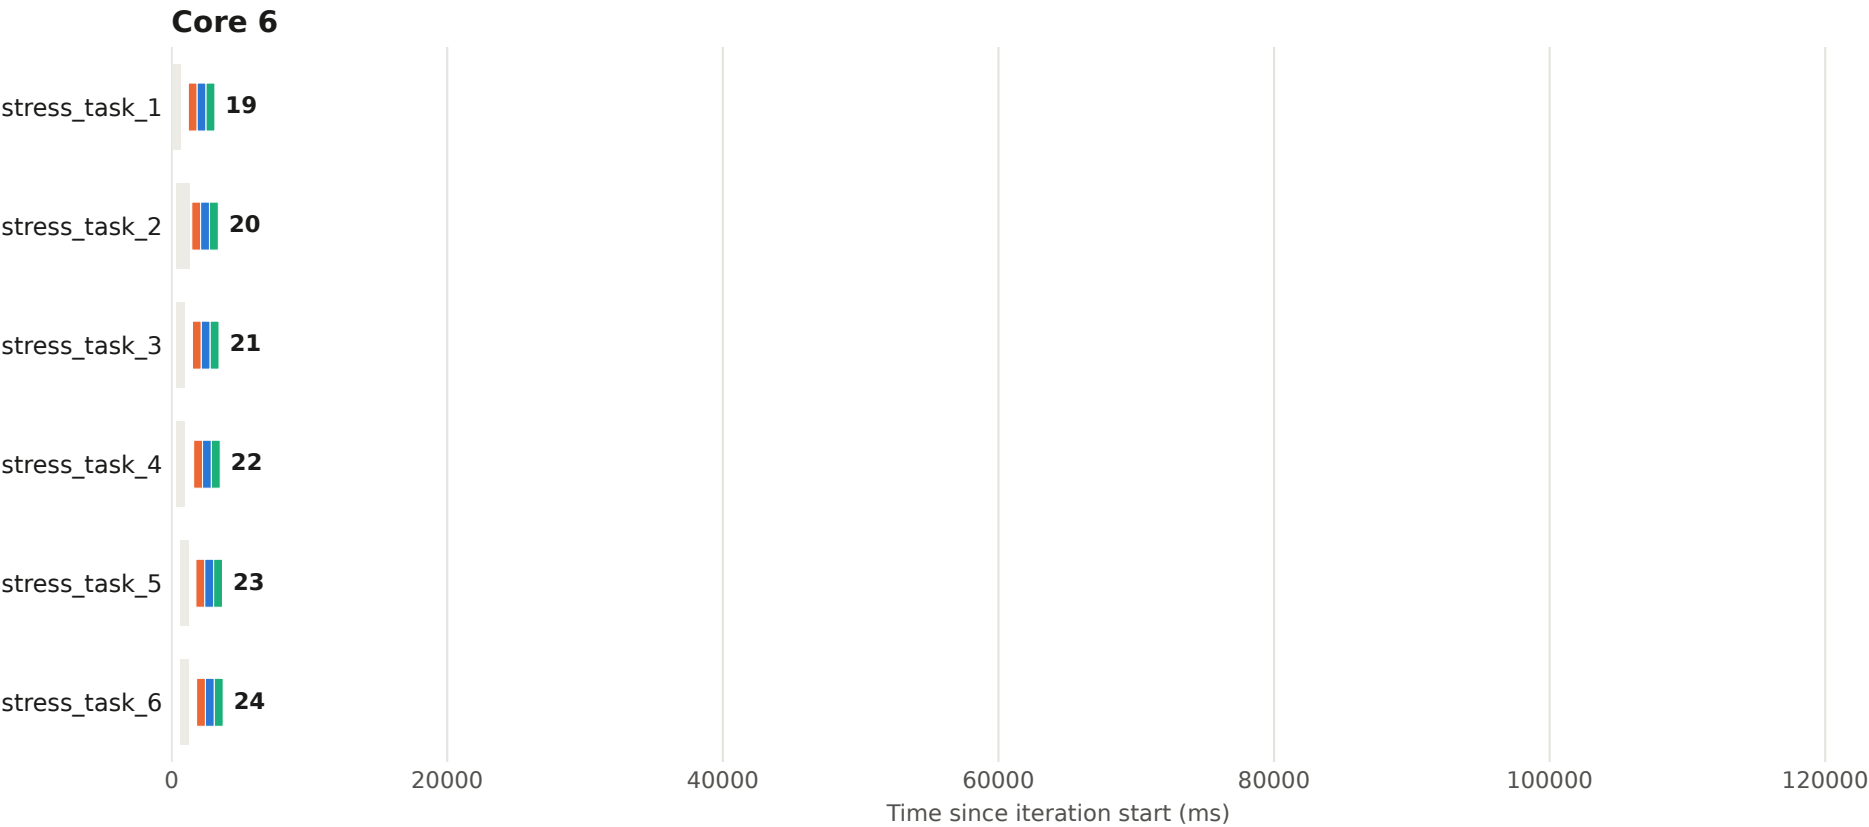


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 56 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

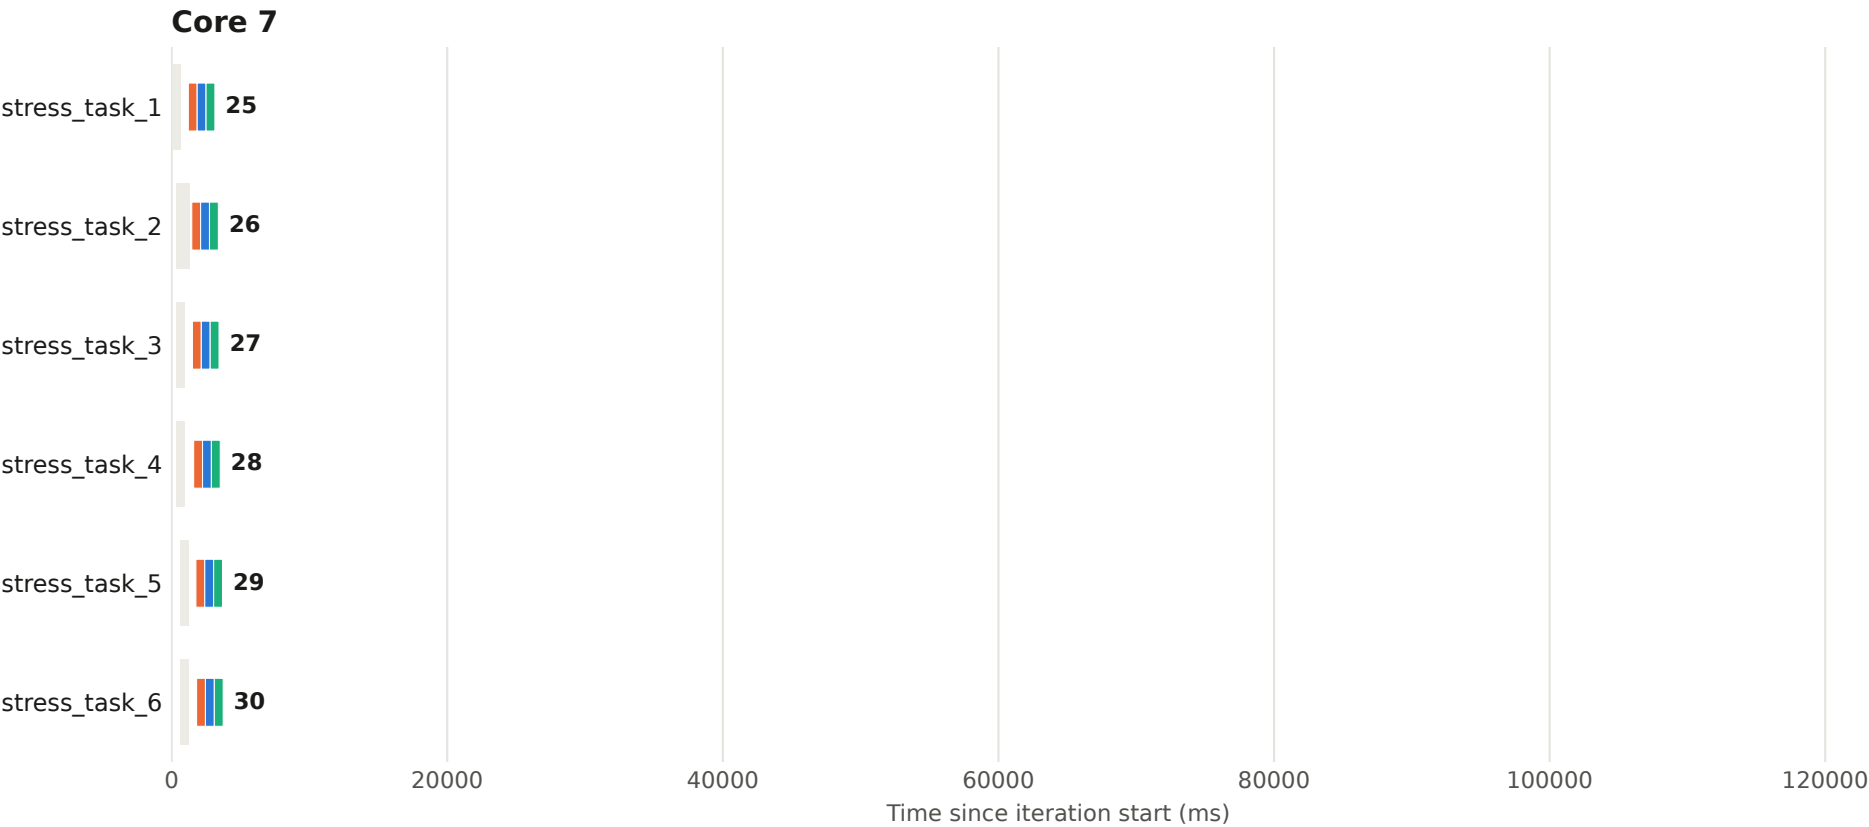


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 57 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

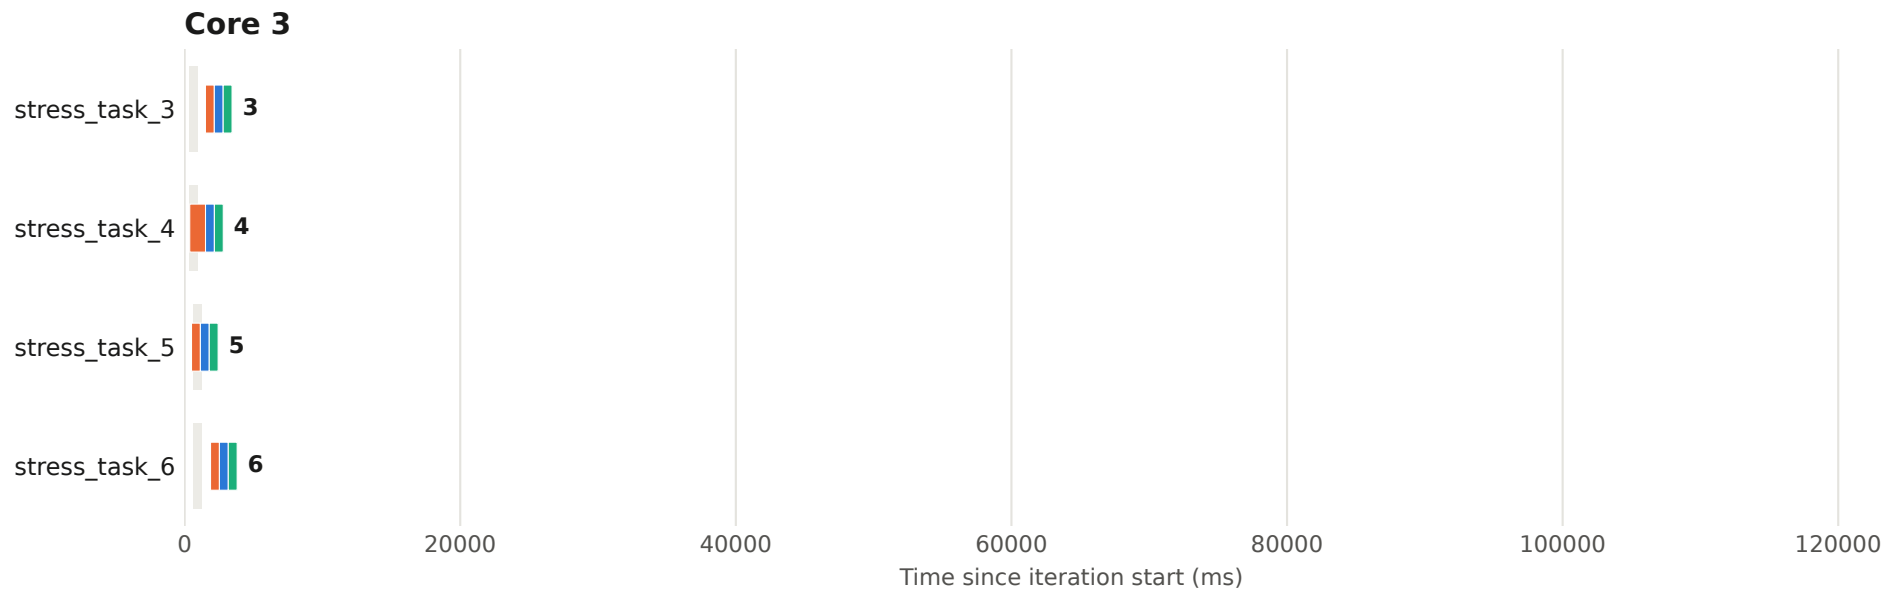

Execution plan - iteration 57 - core 4

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

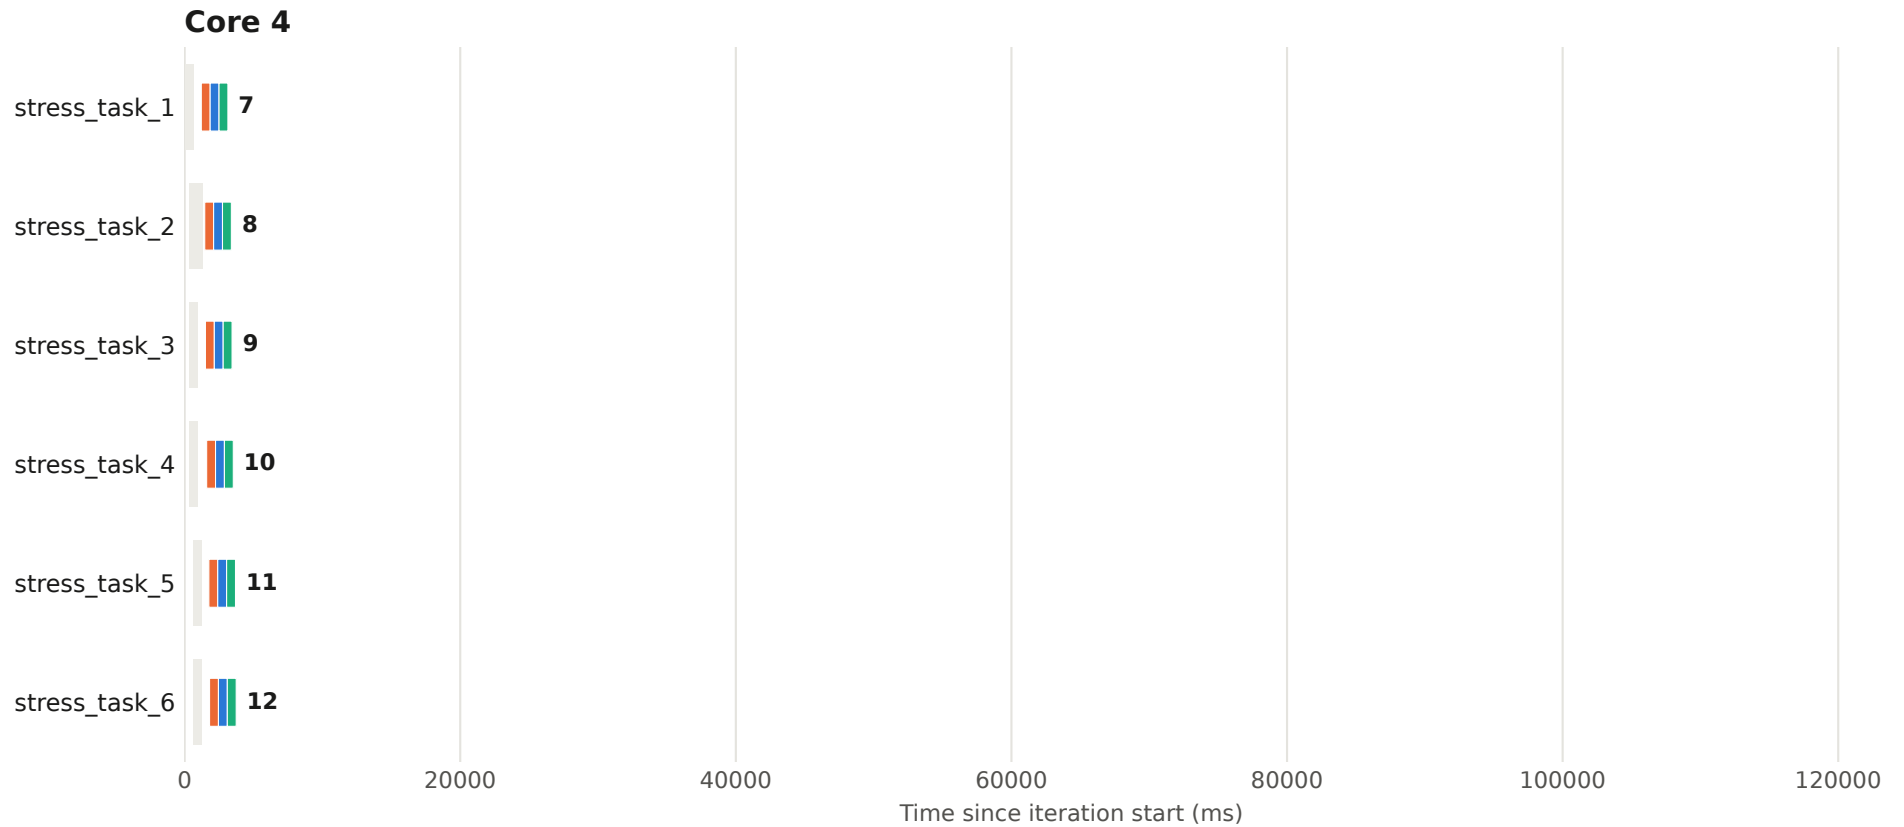

Execution plan - iteration 57 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

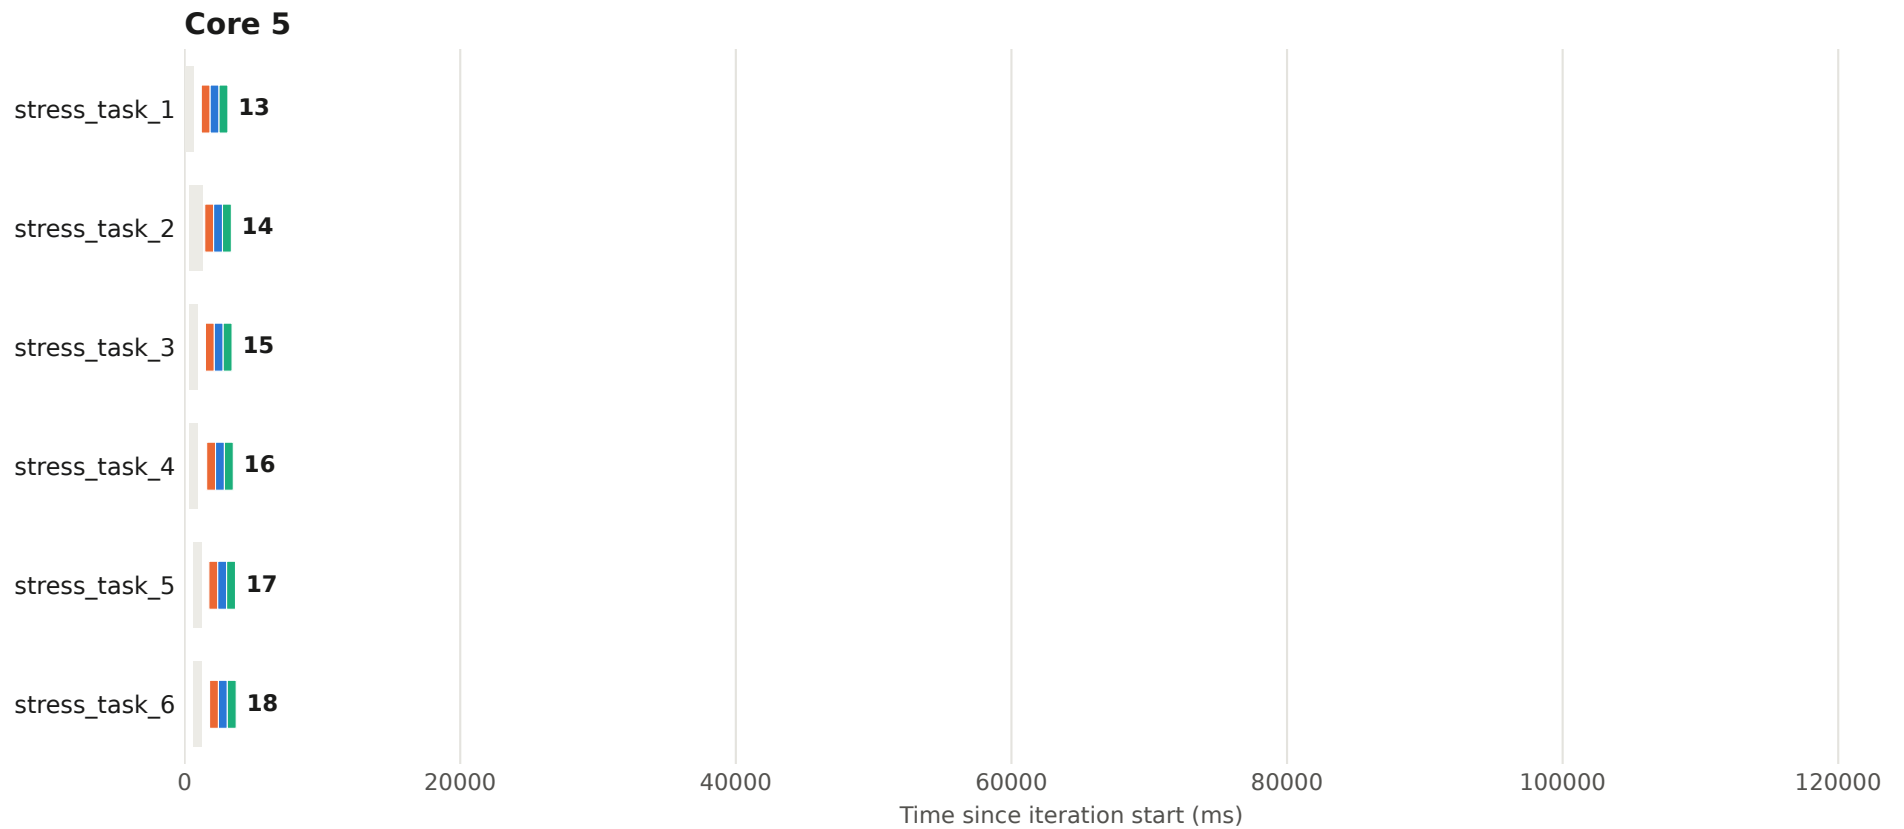


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 57 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

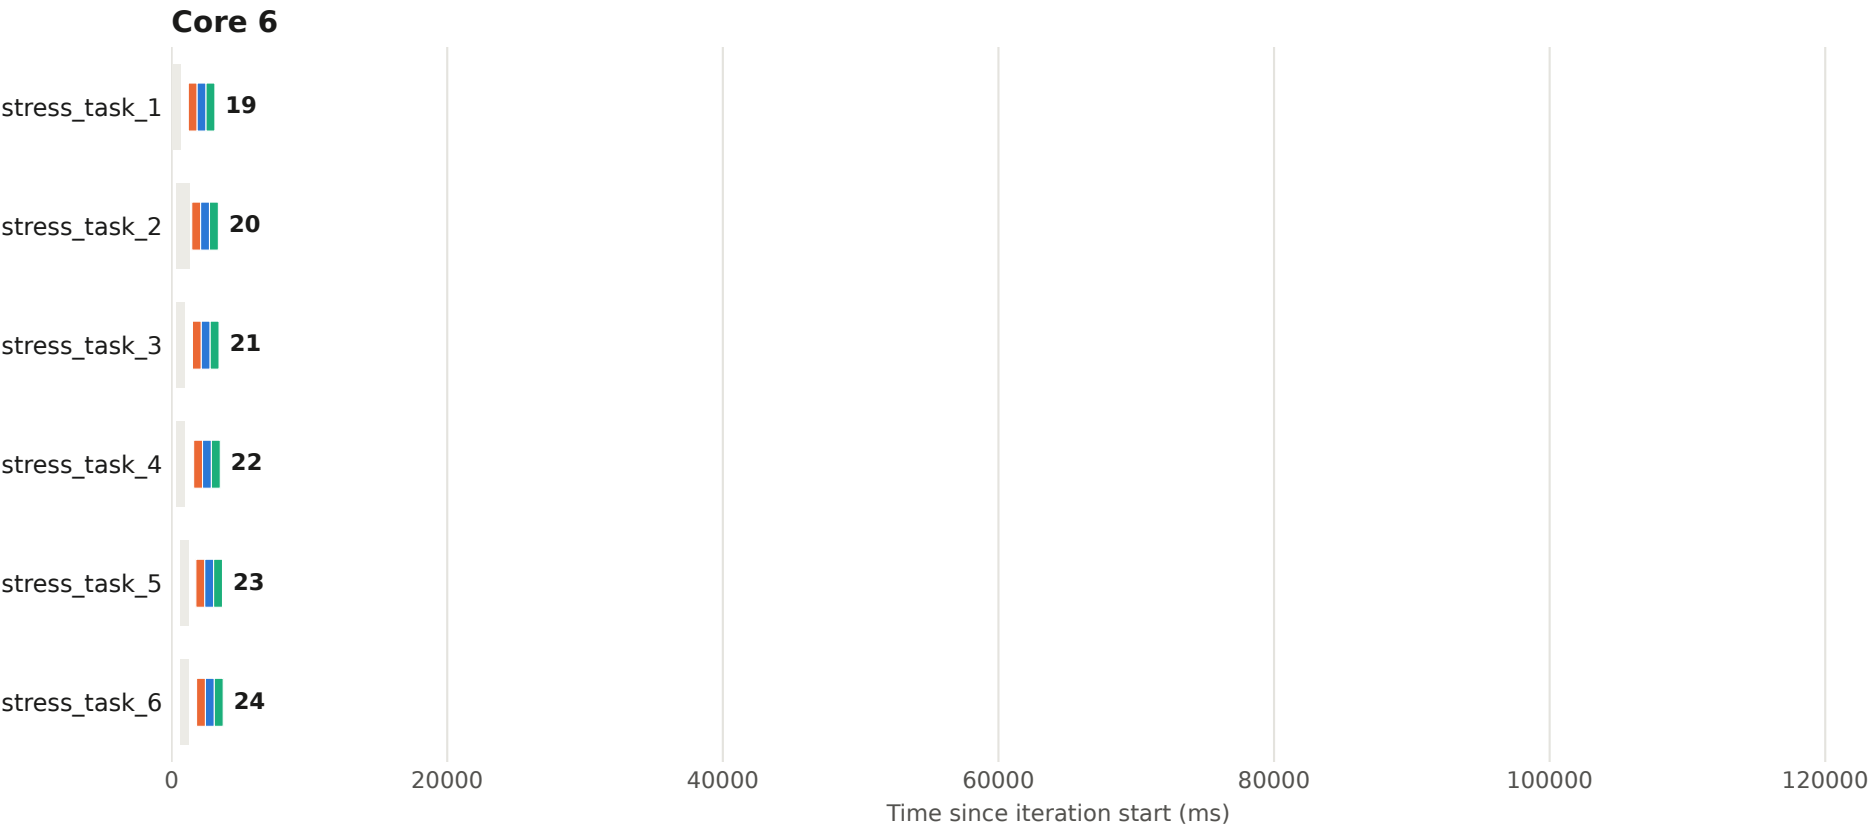


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 57 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

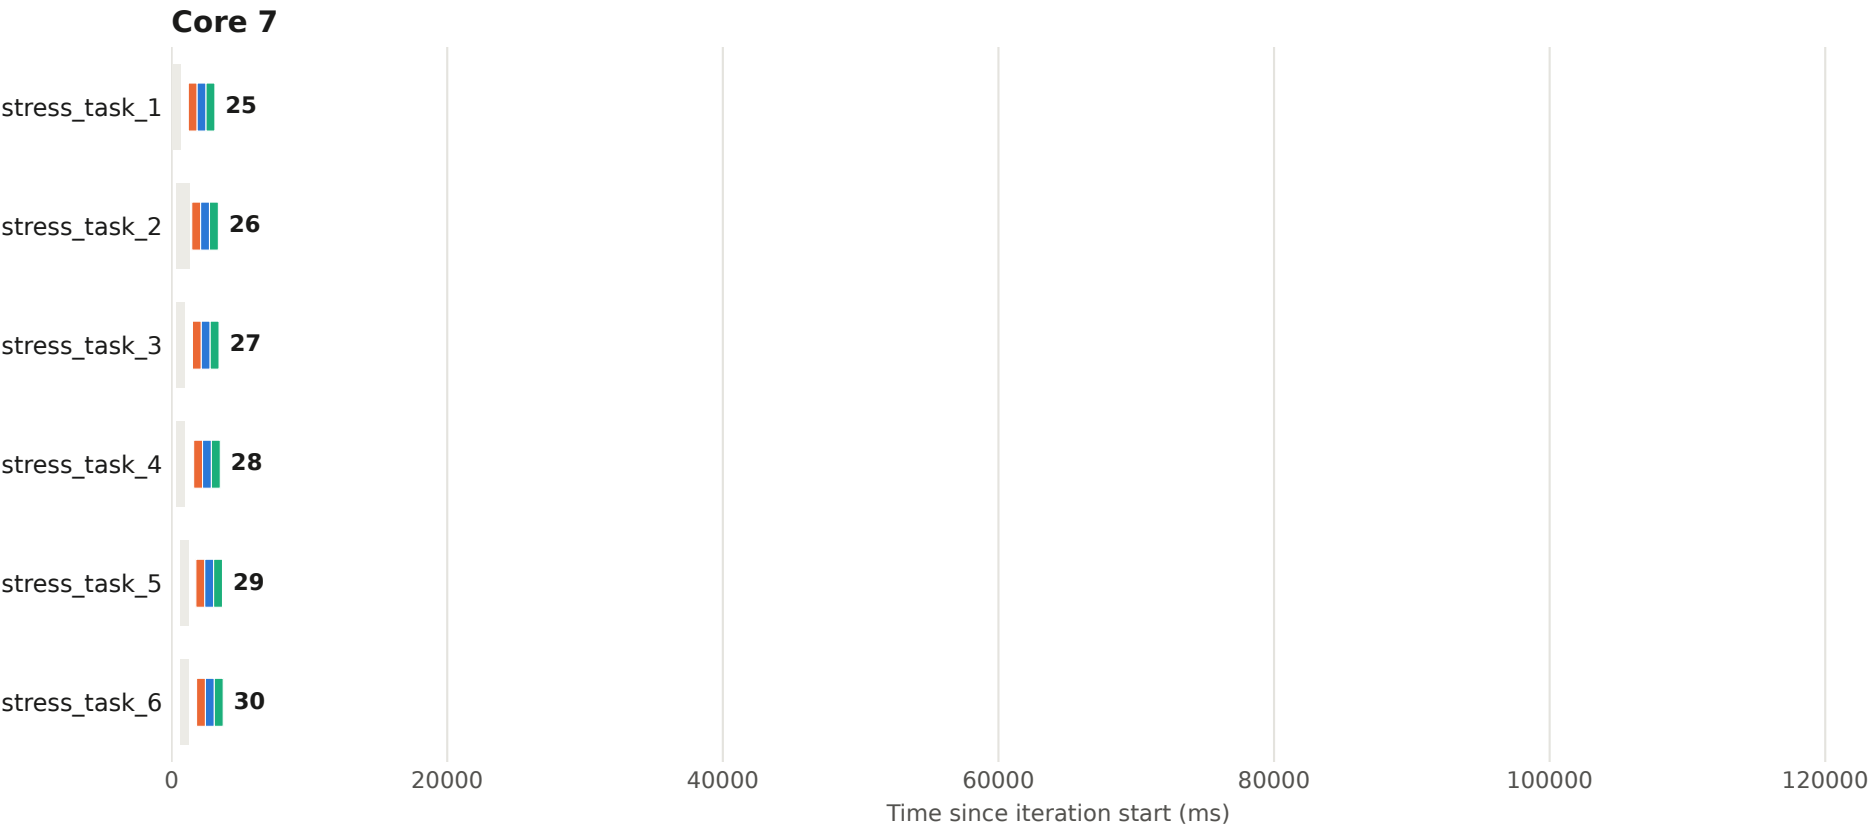


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 58 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

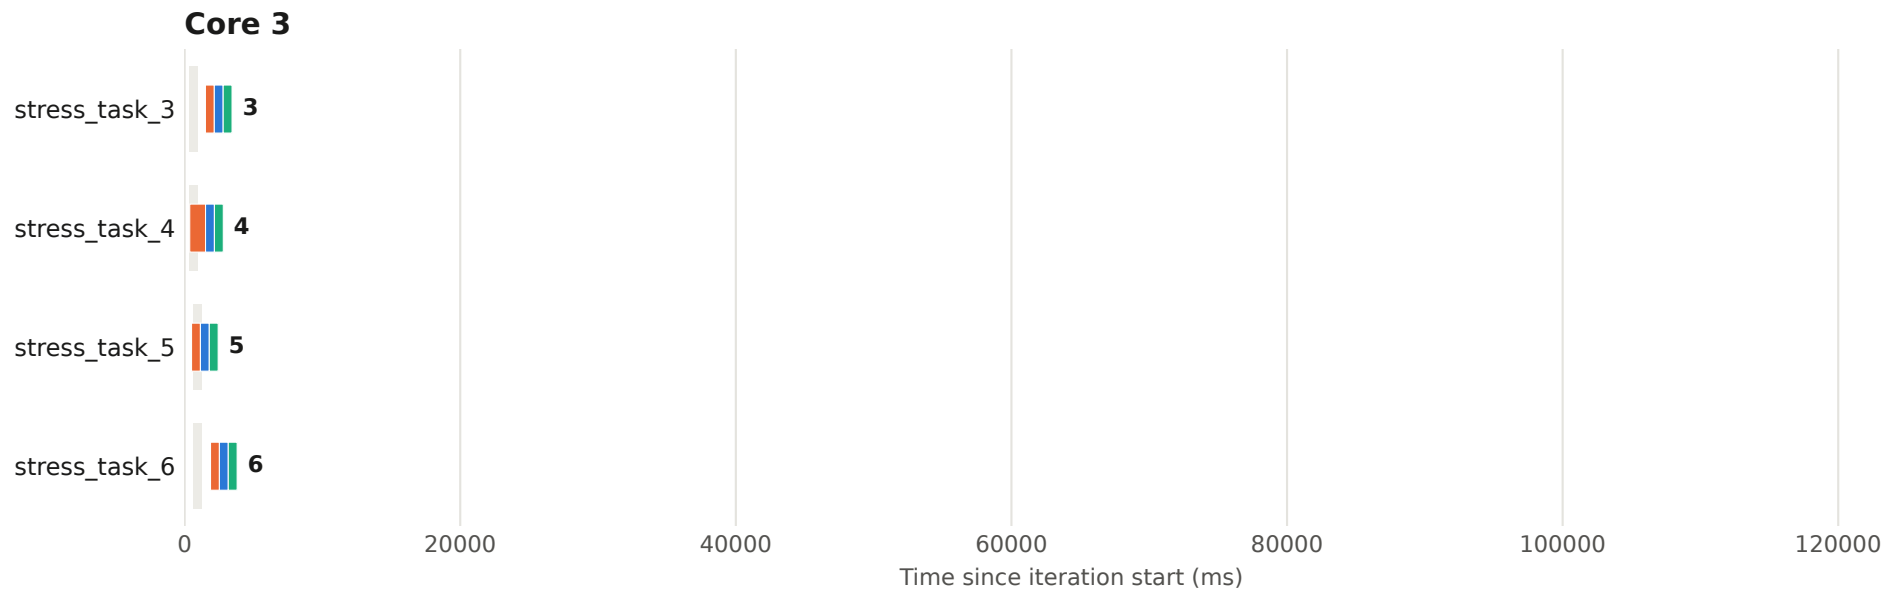


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 58 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

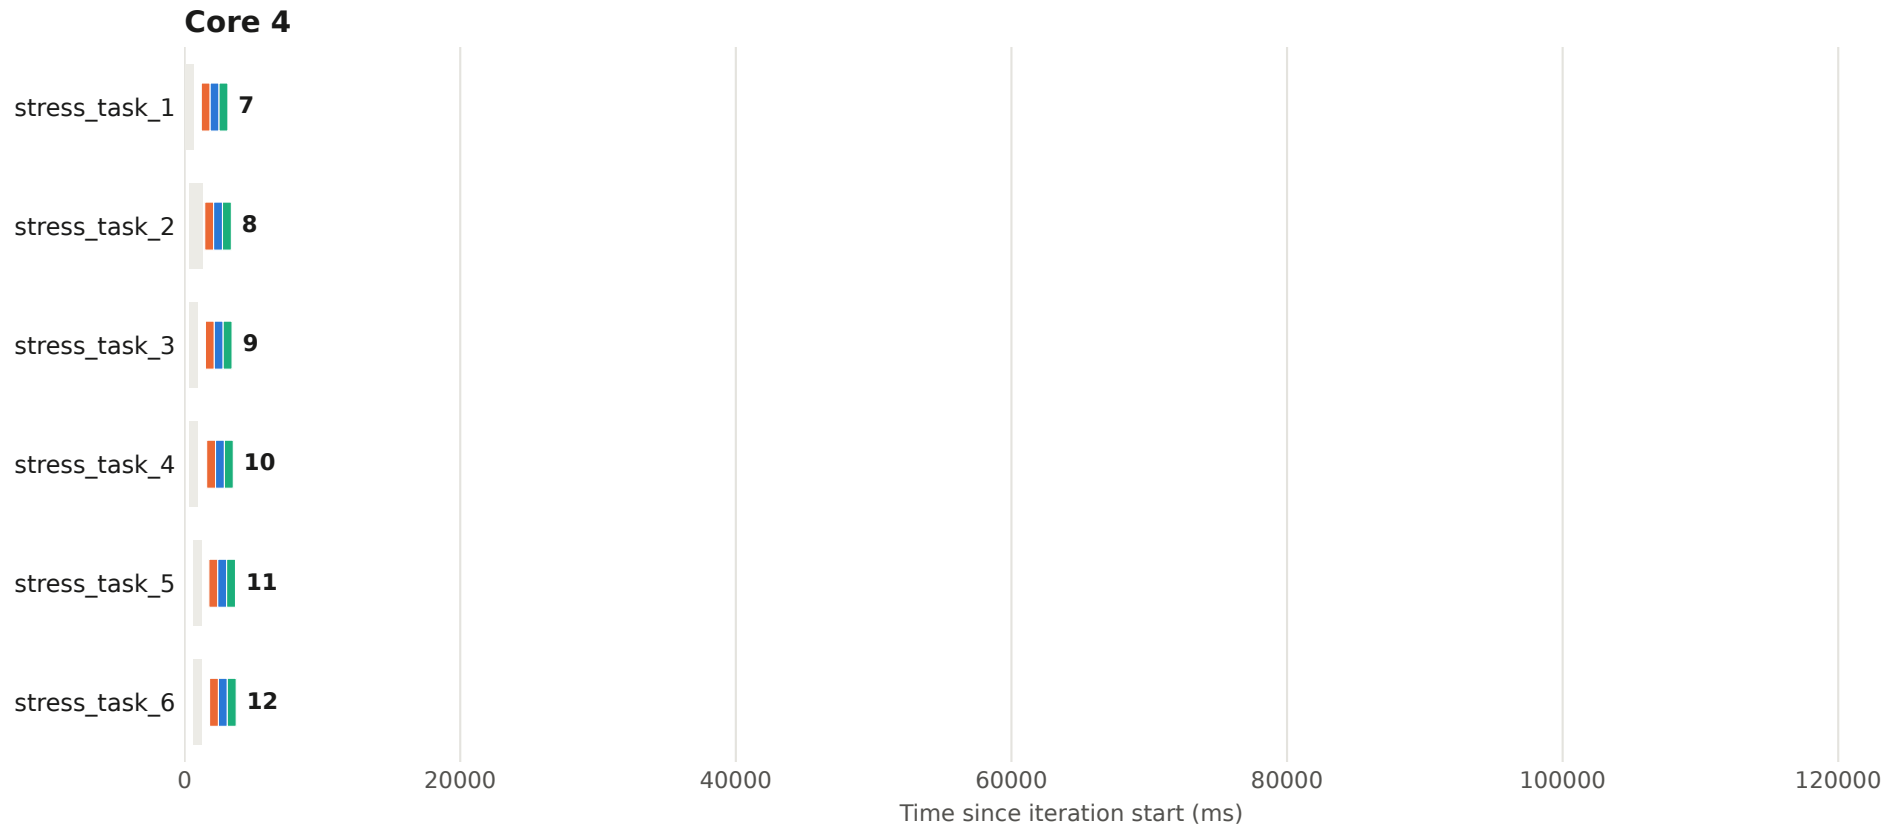


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 58 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

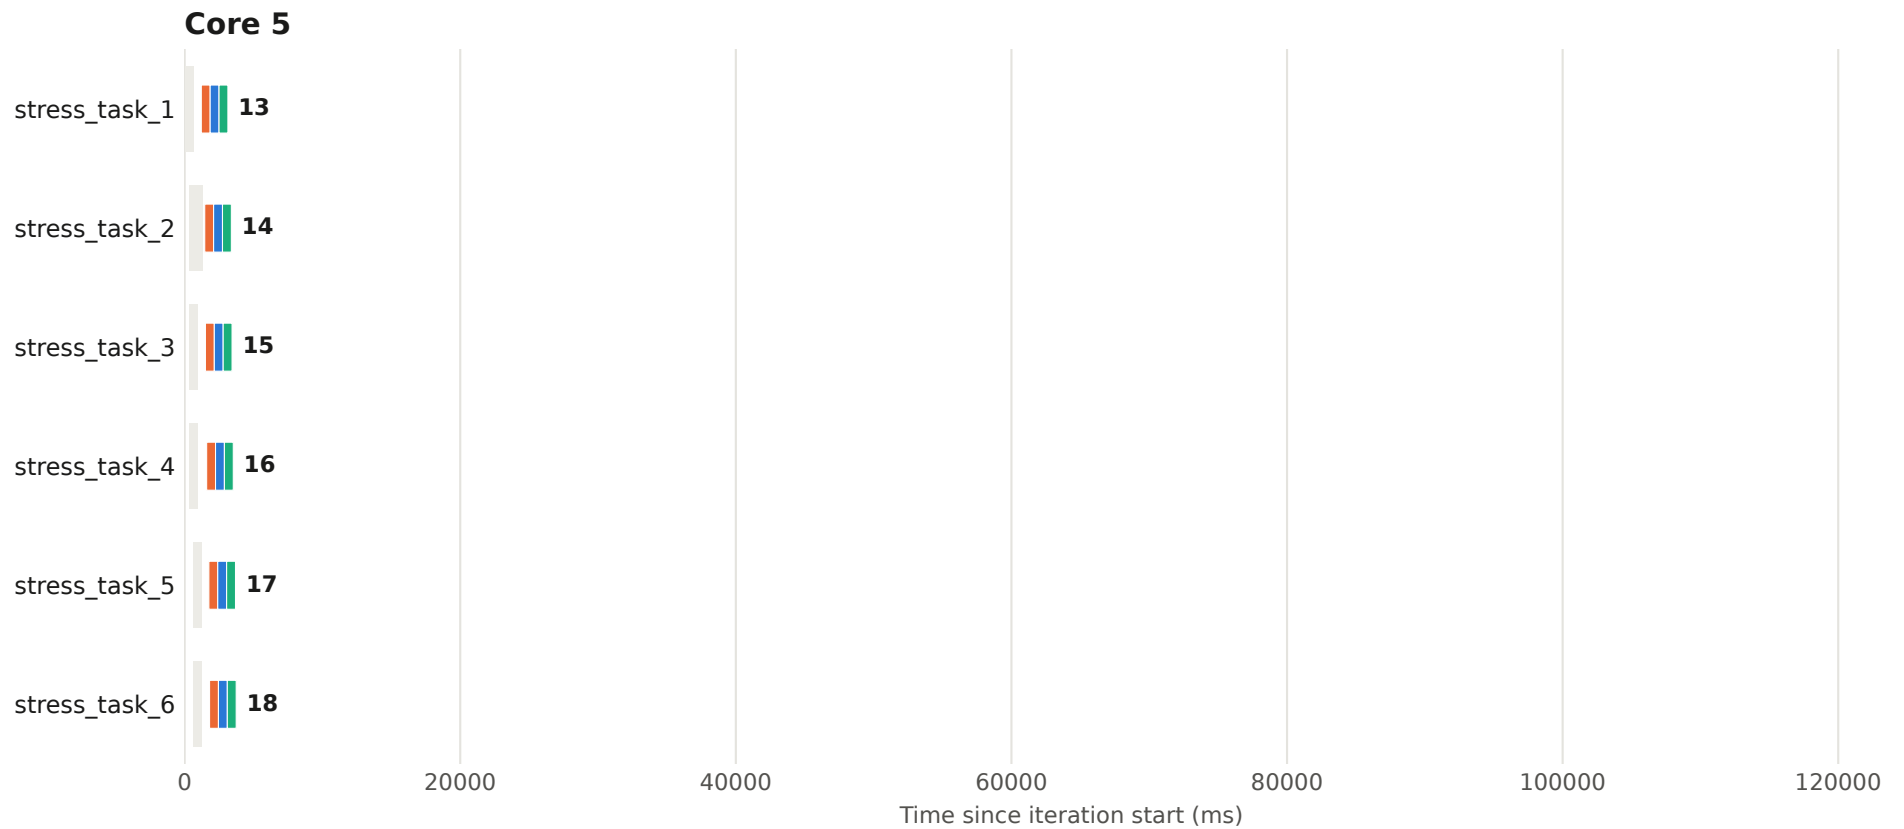


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 58 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

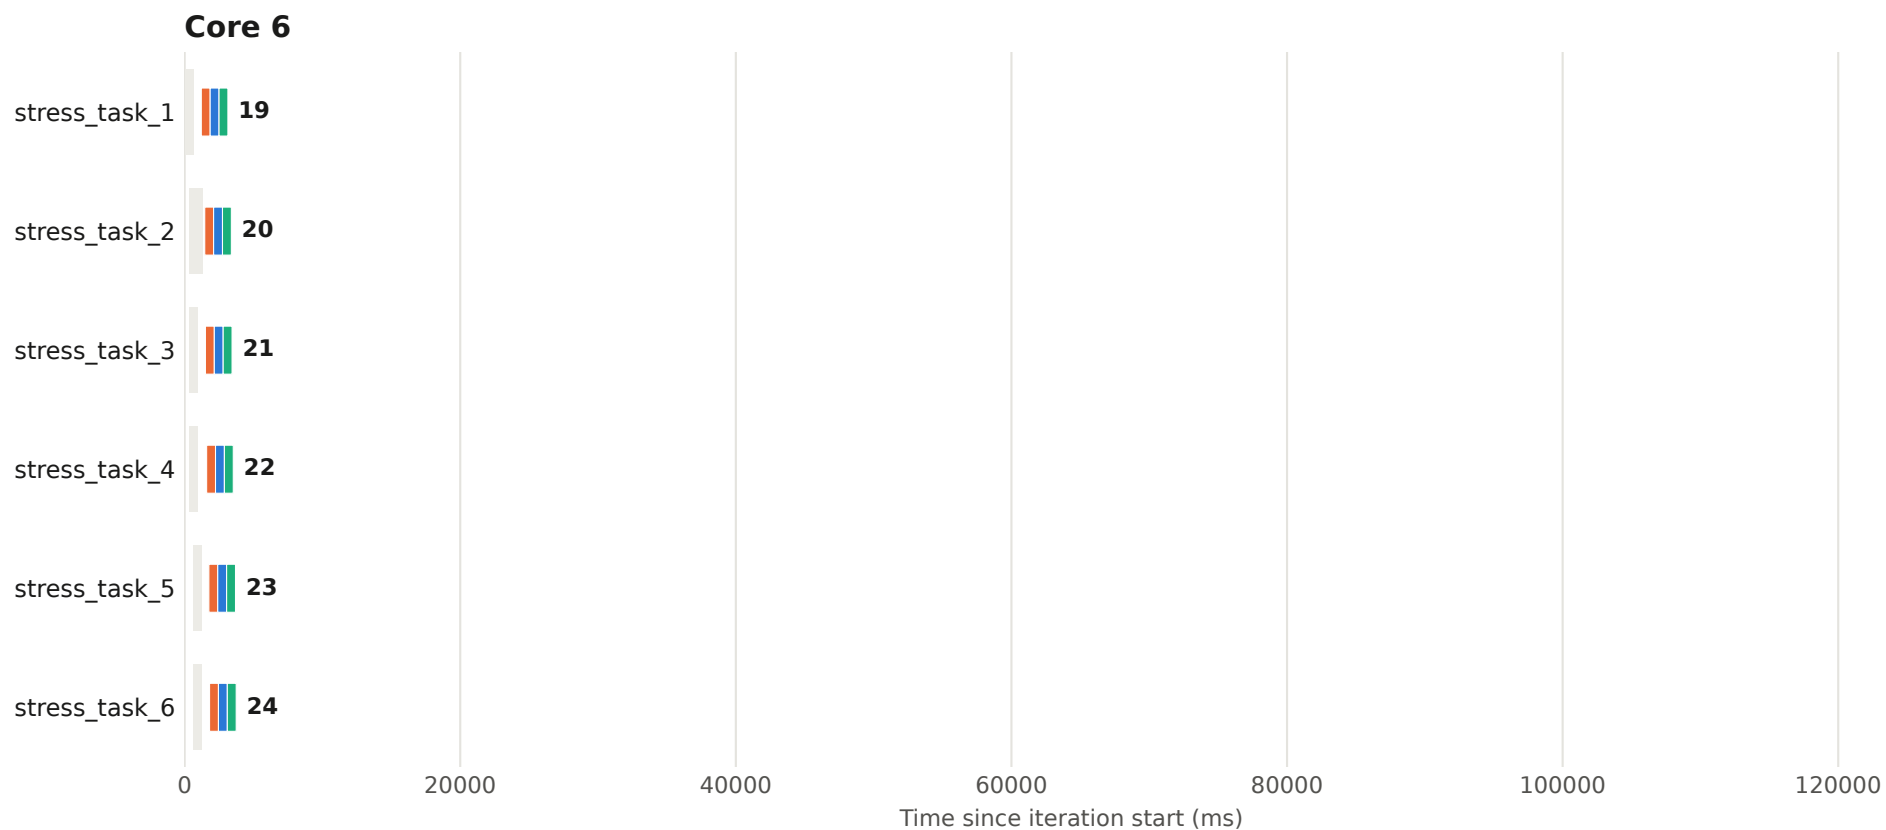


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 58 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

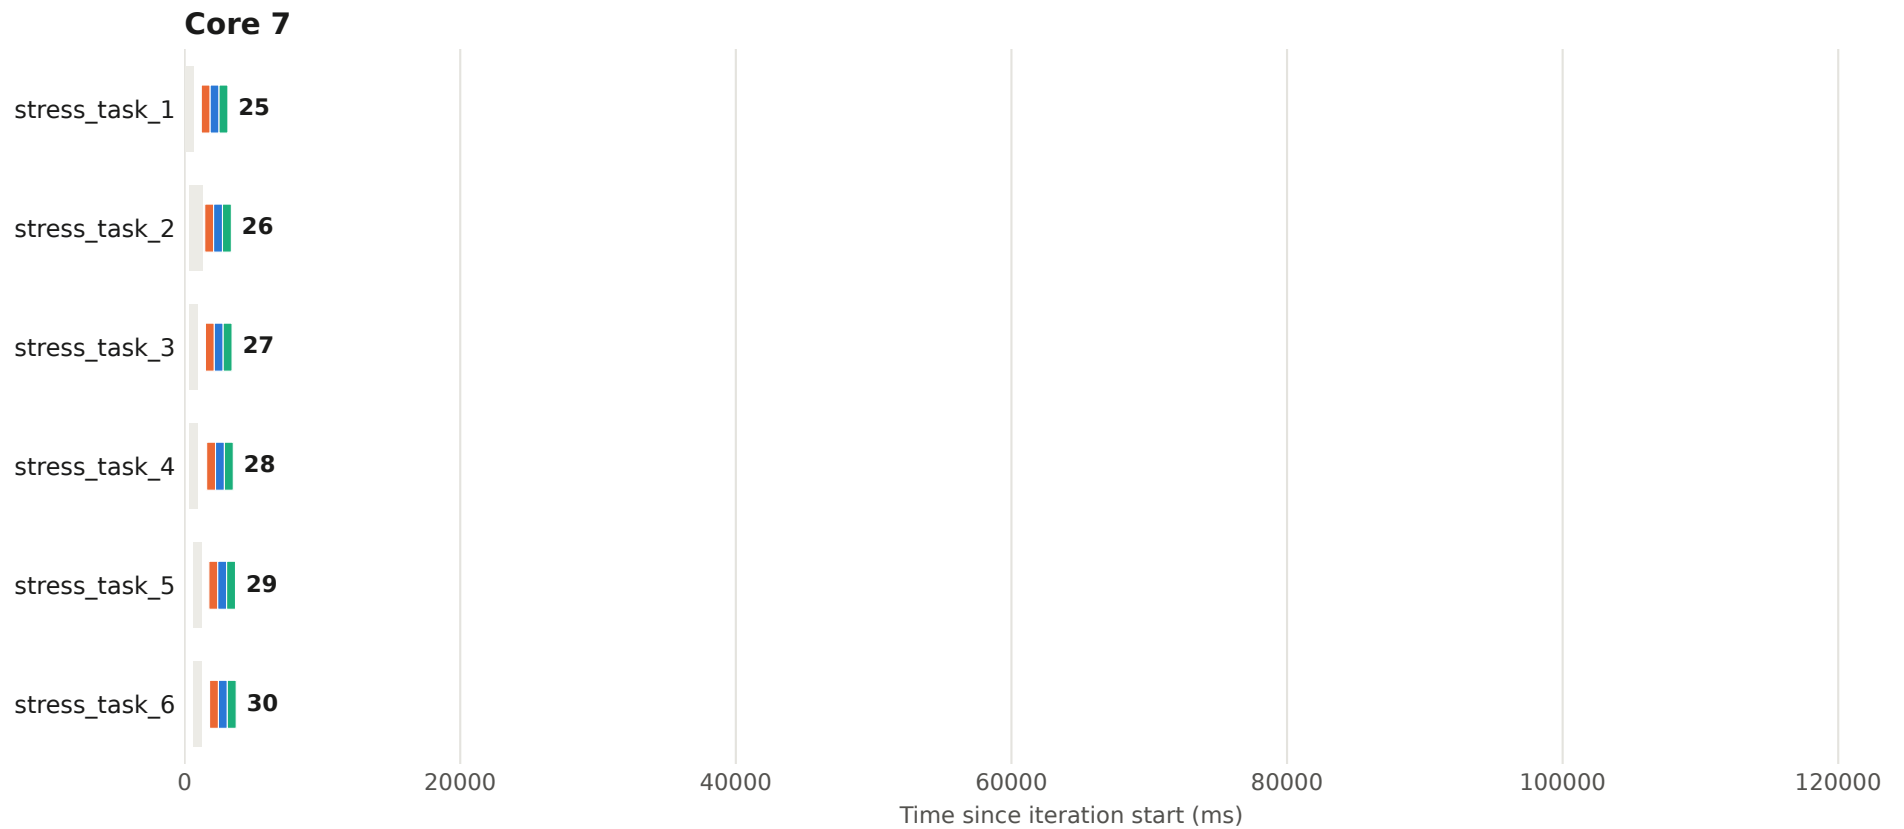


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 59 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

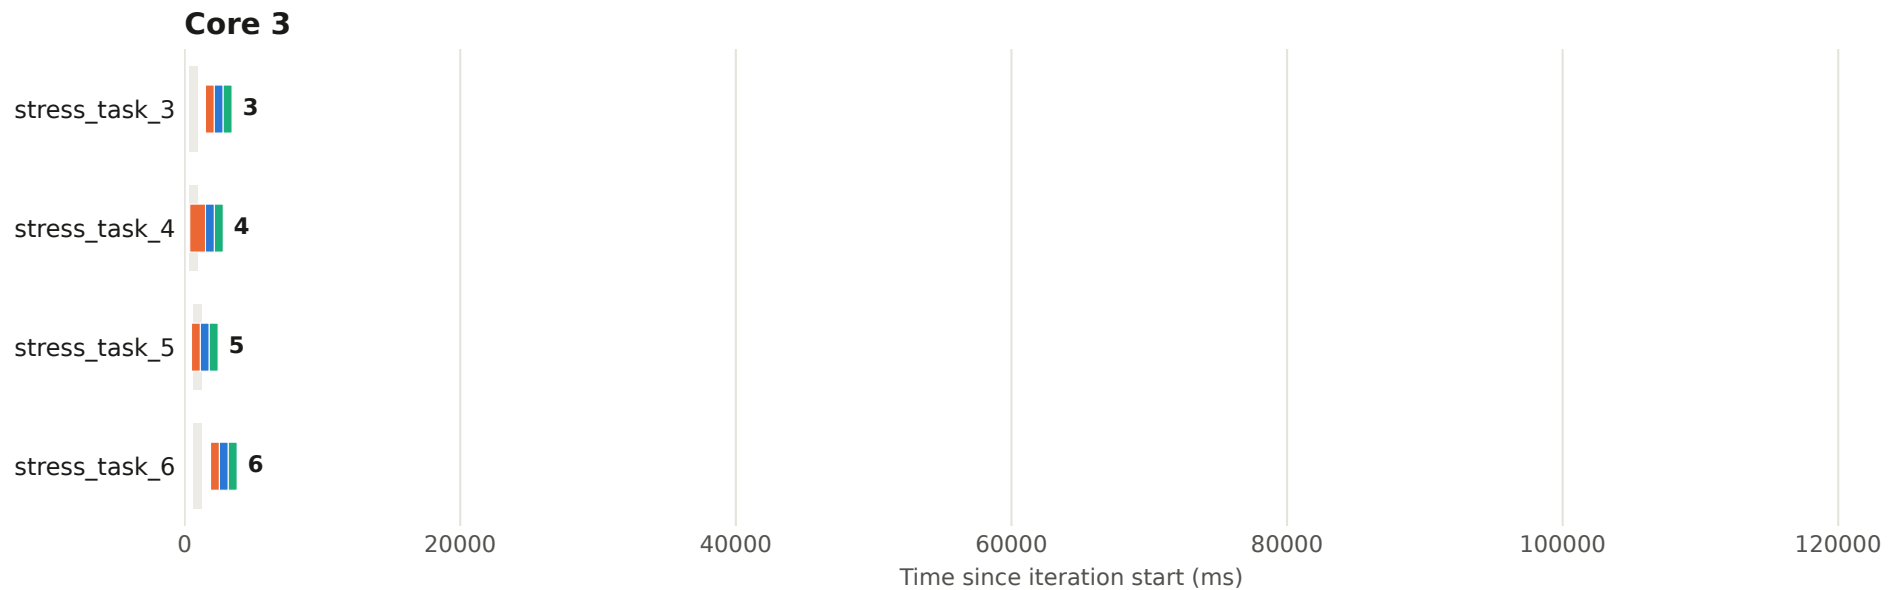


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 59 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

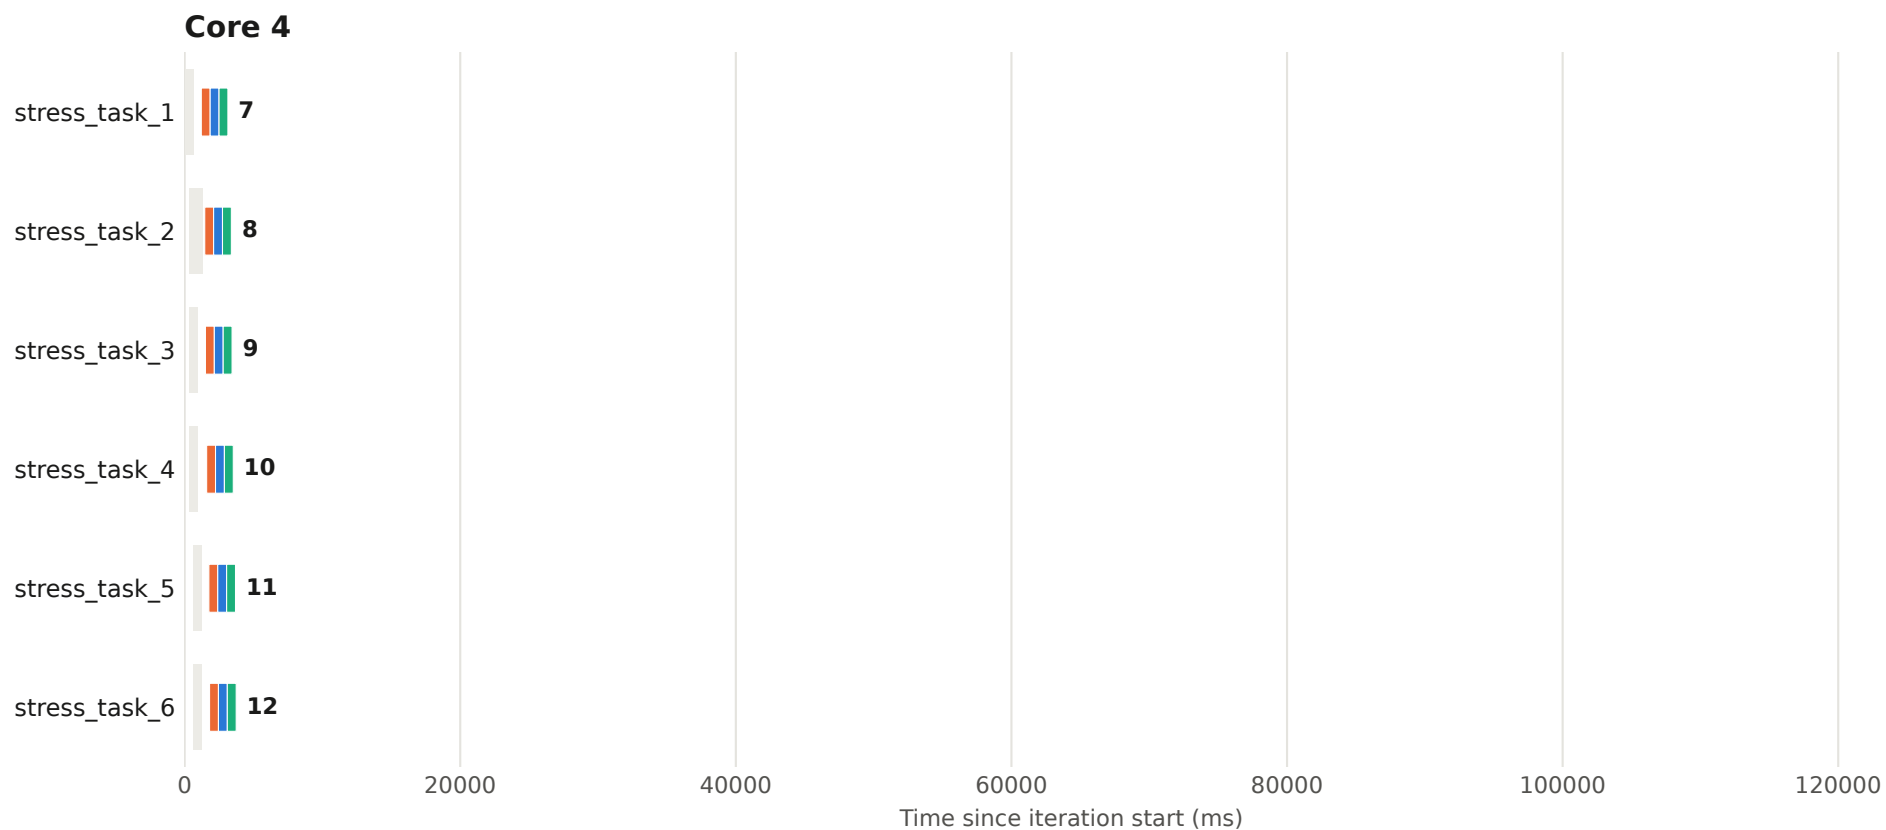


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 59 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

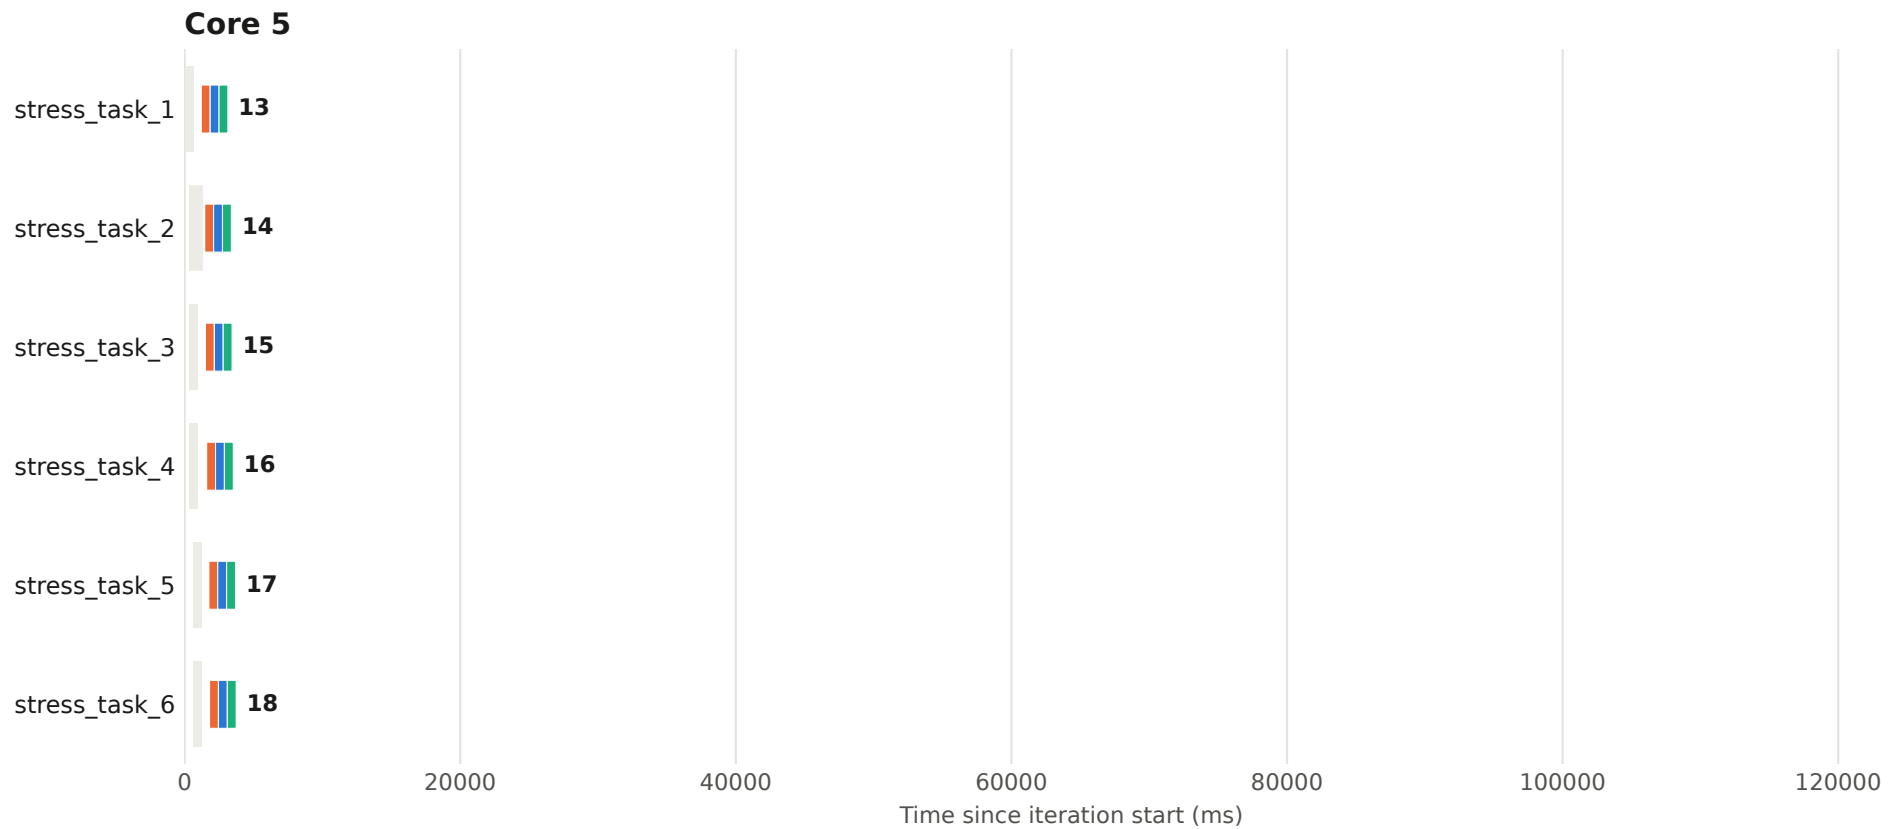


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 59 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

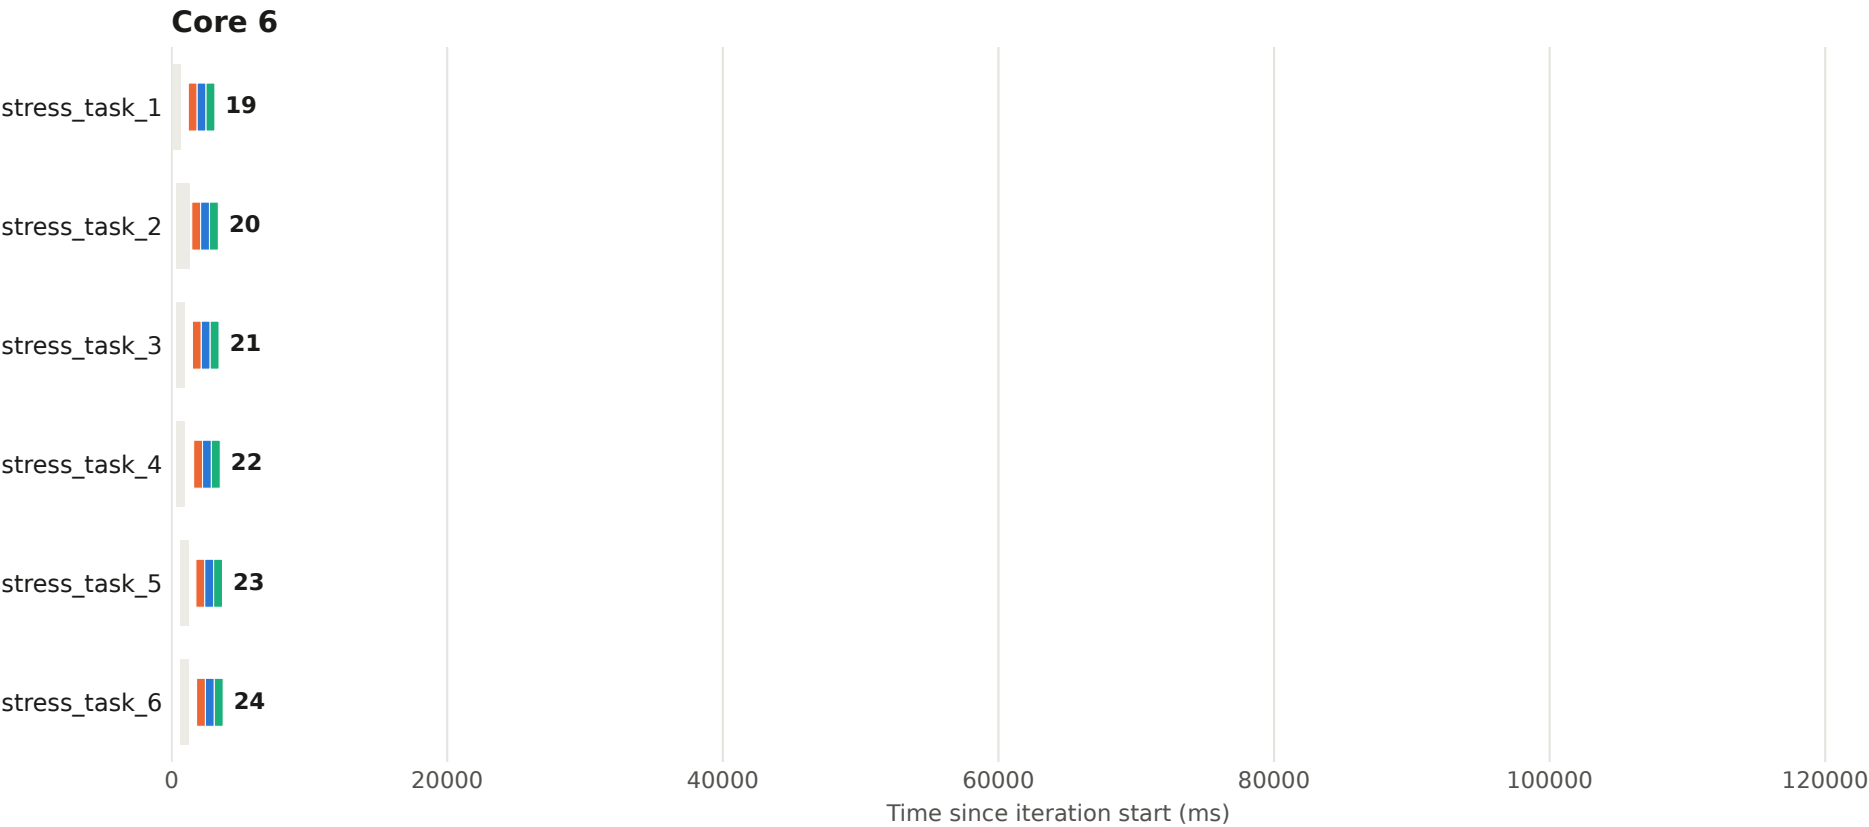


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 59 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

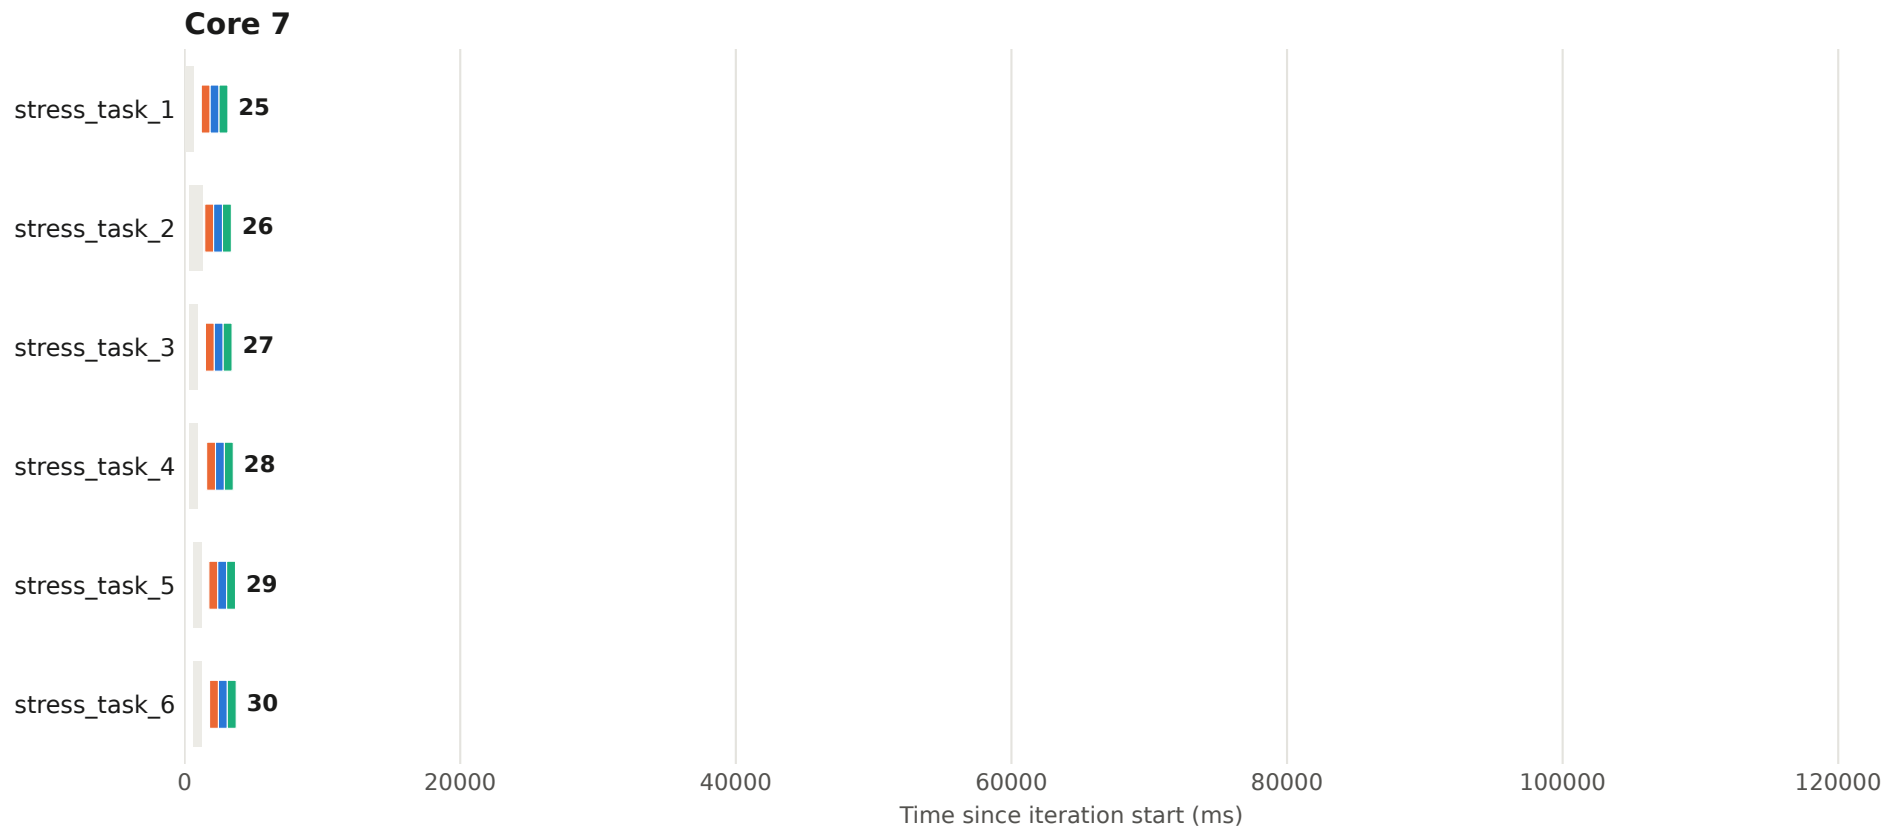


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 60 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

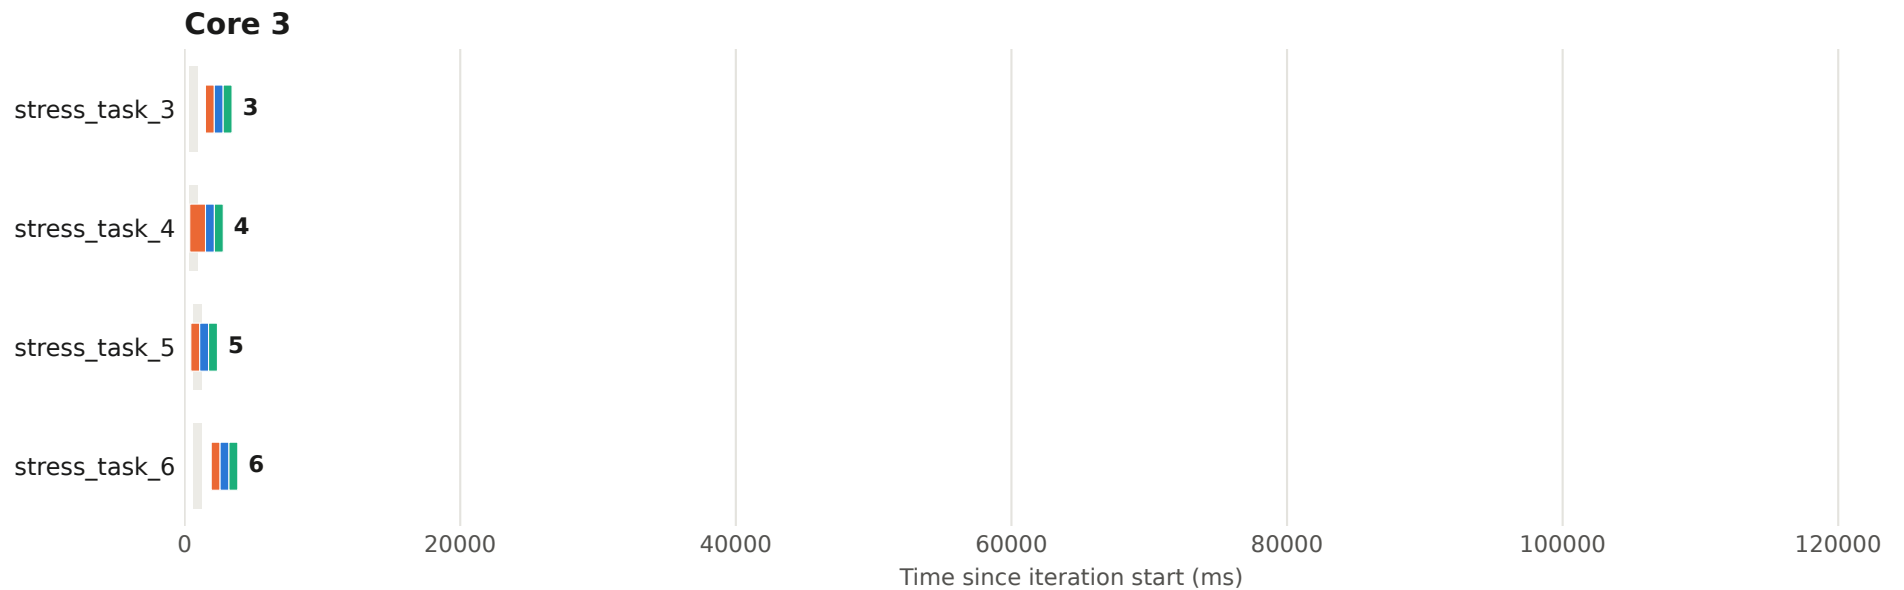

Execution plan - iteration 60 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

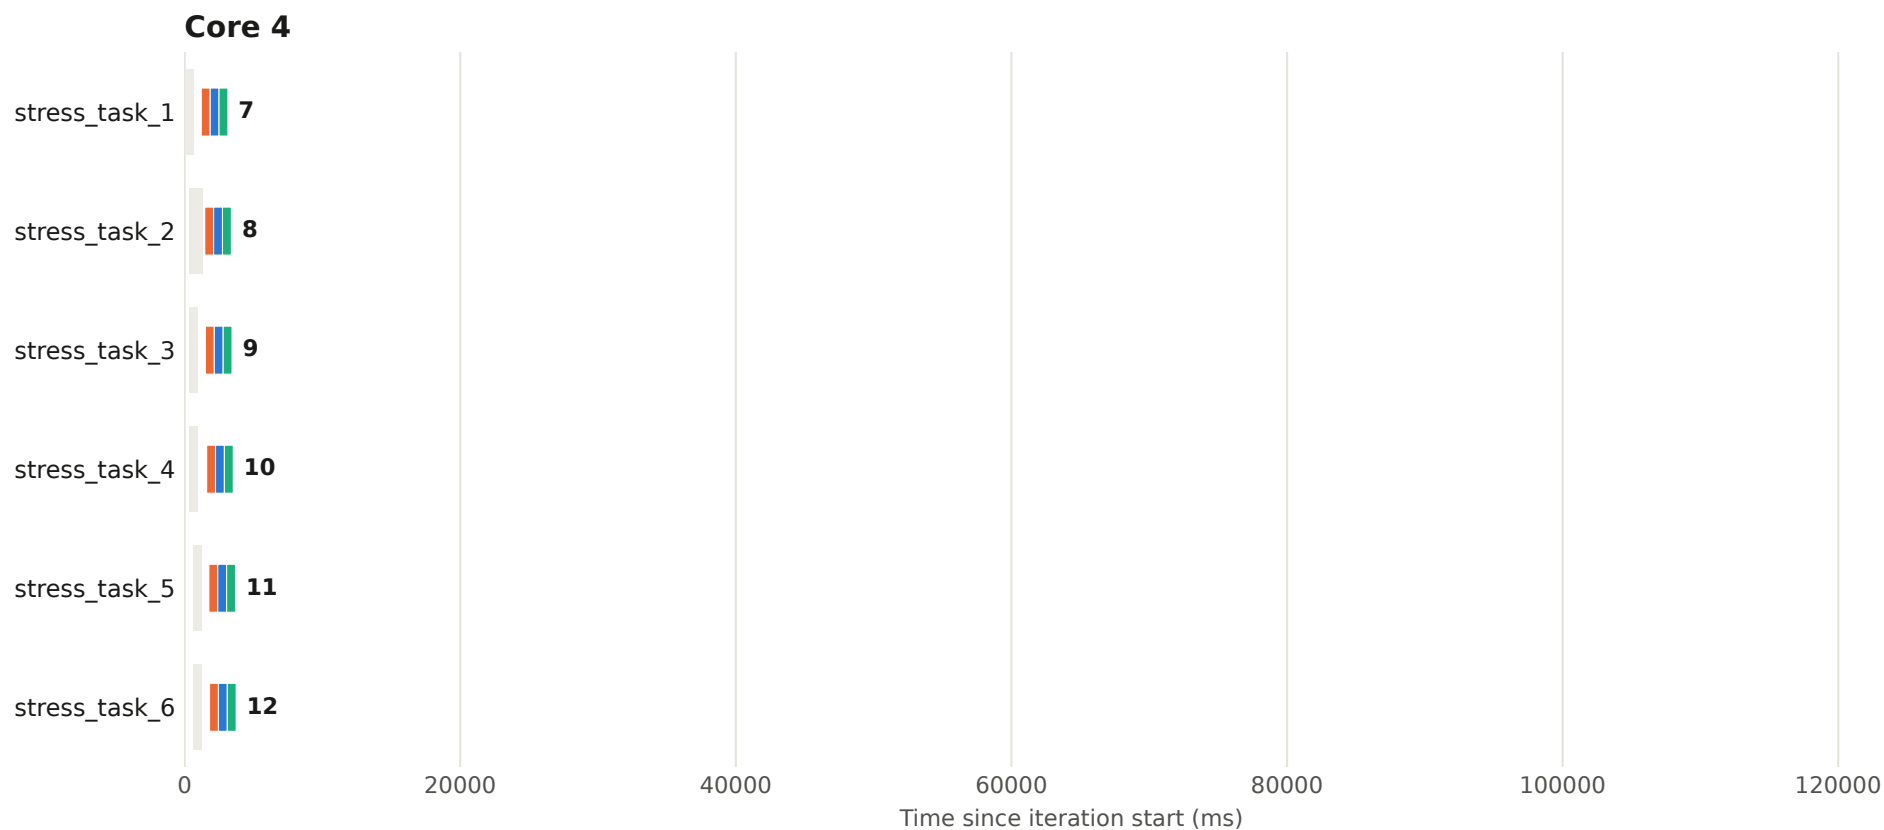


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 60 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

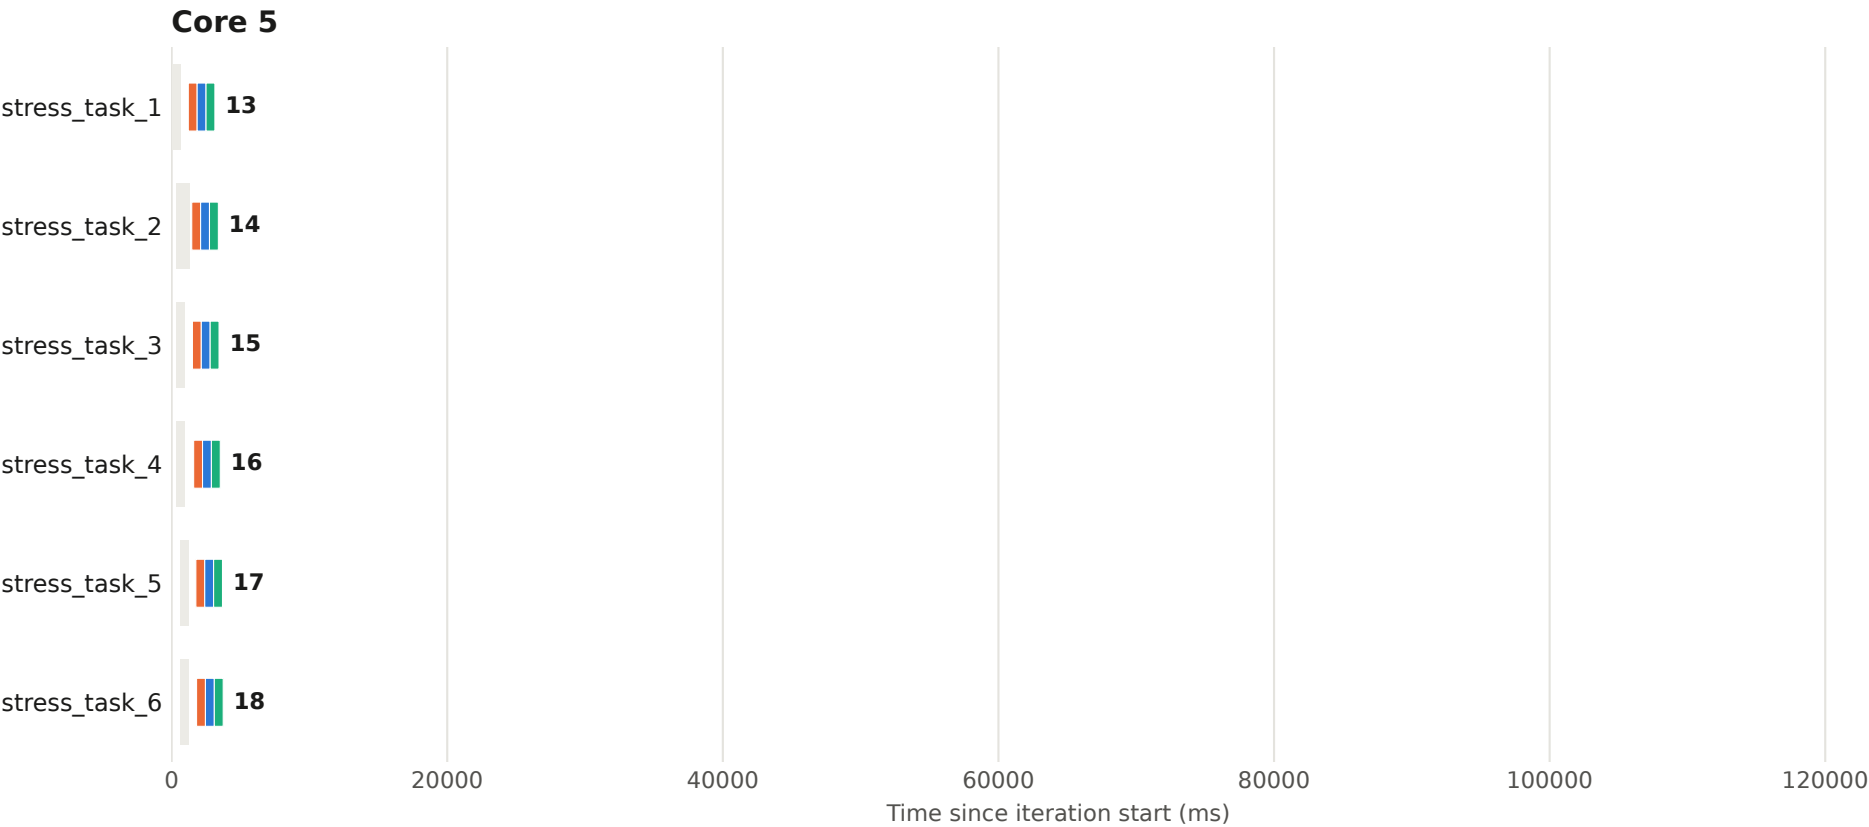


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 60 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

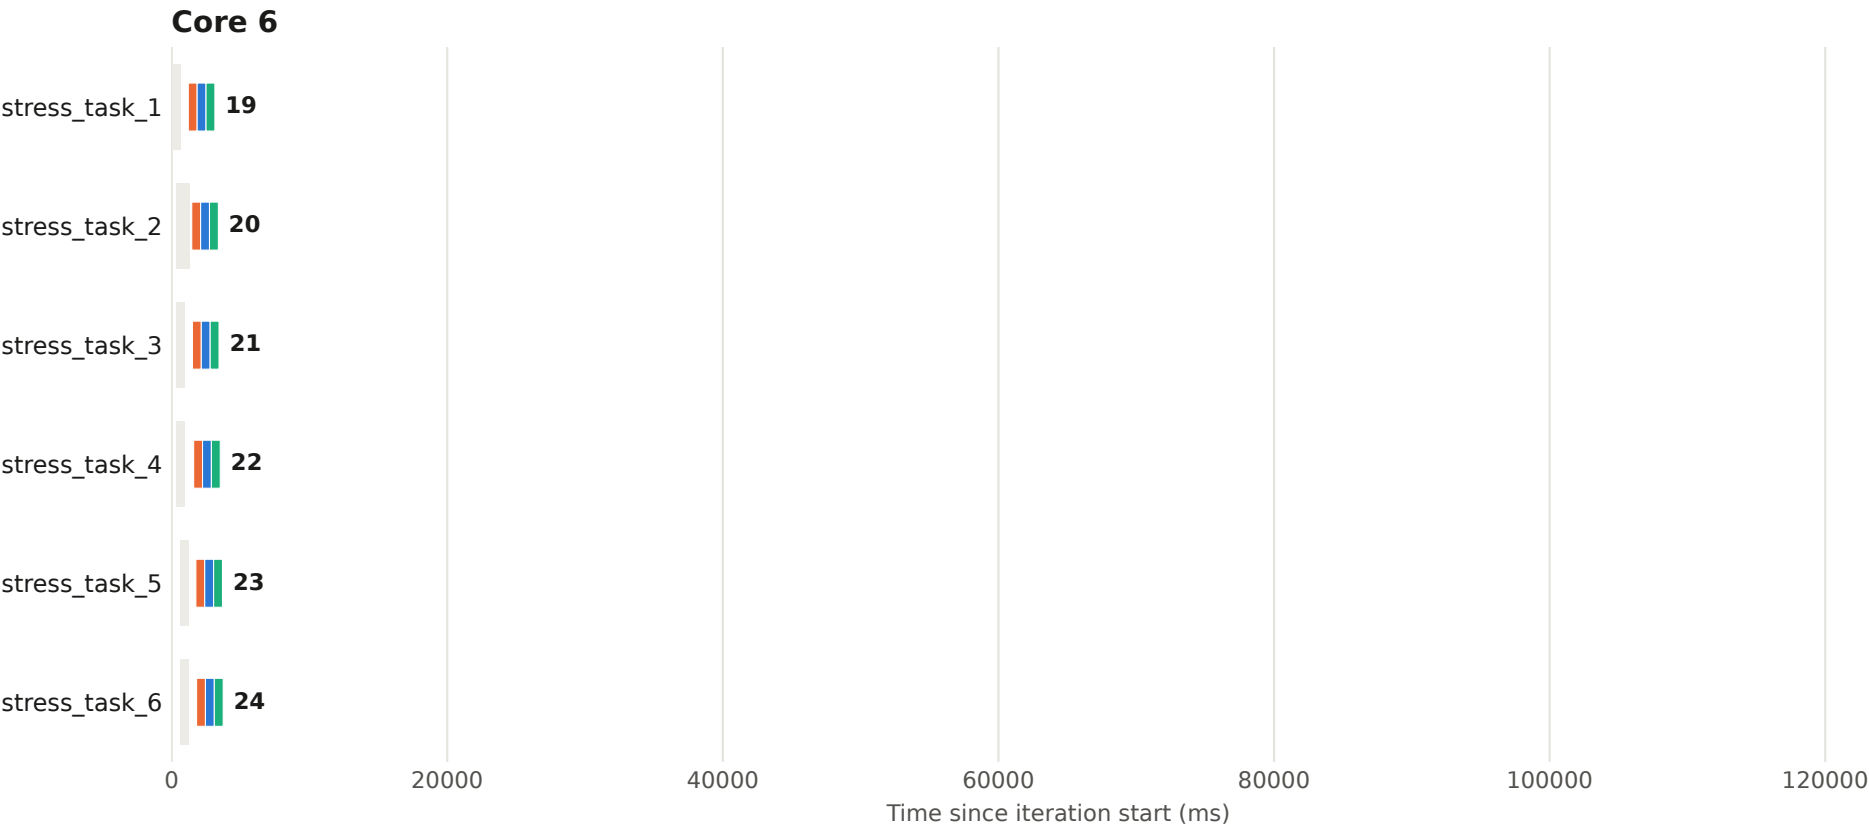


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 60 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

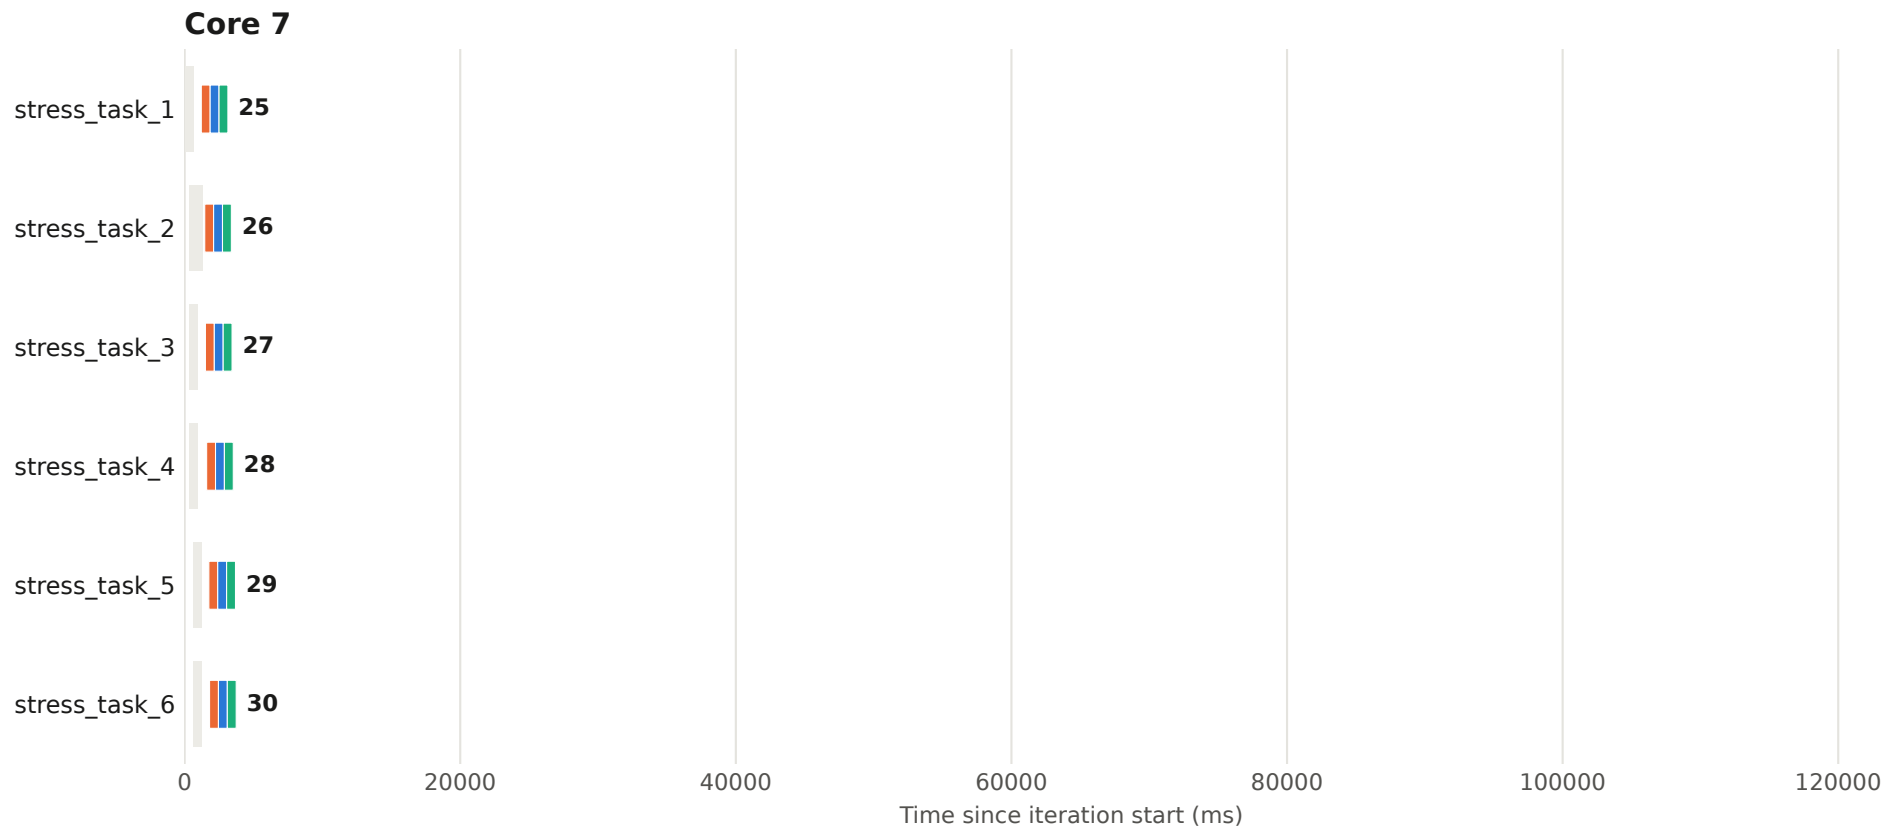


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 61 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

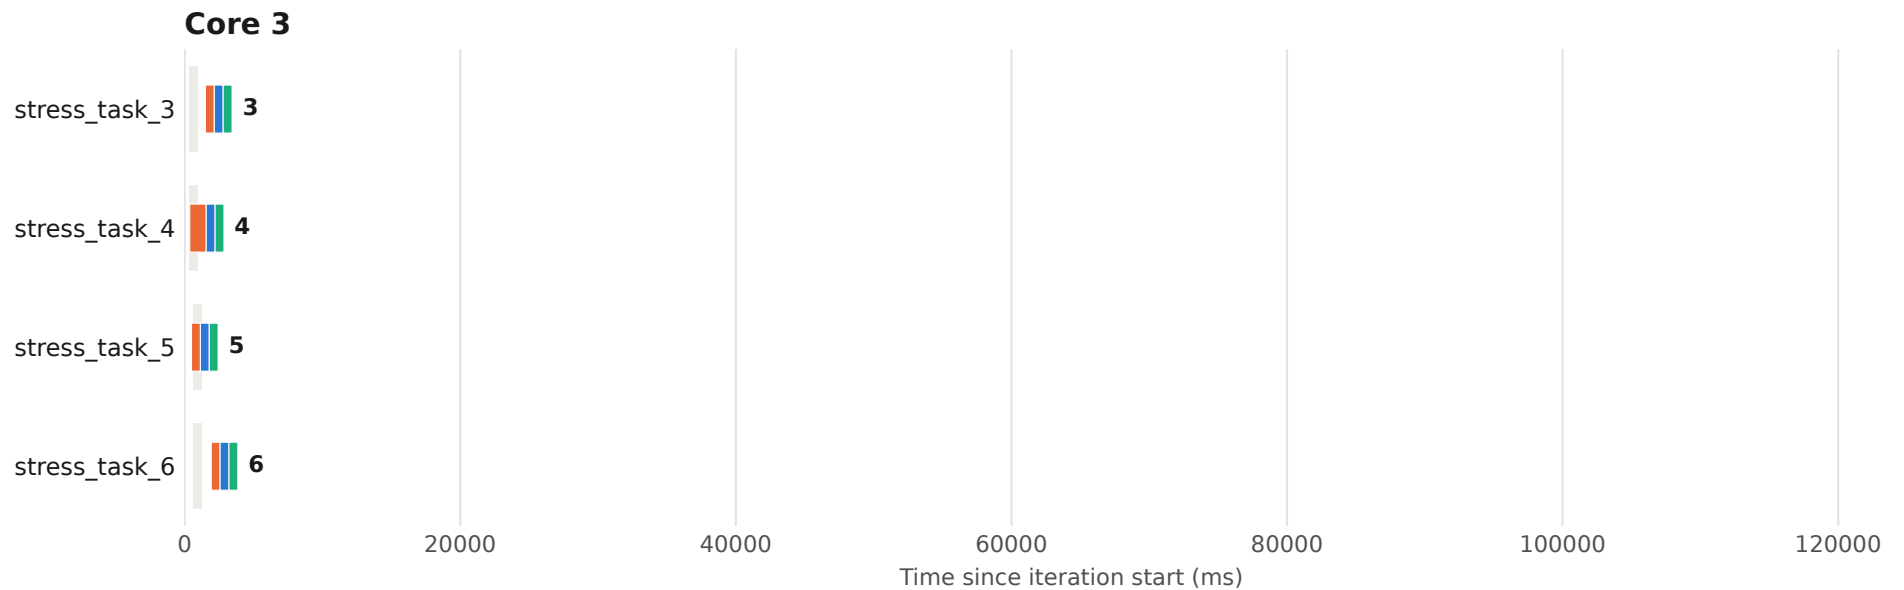

Execution plan - iteration 61 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

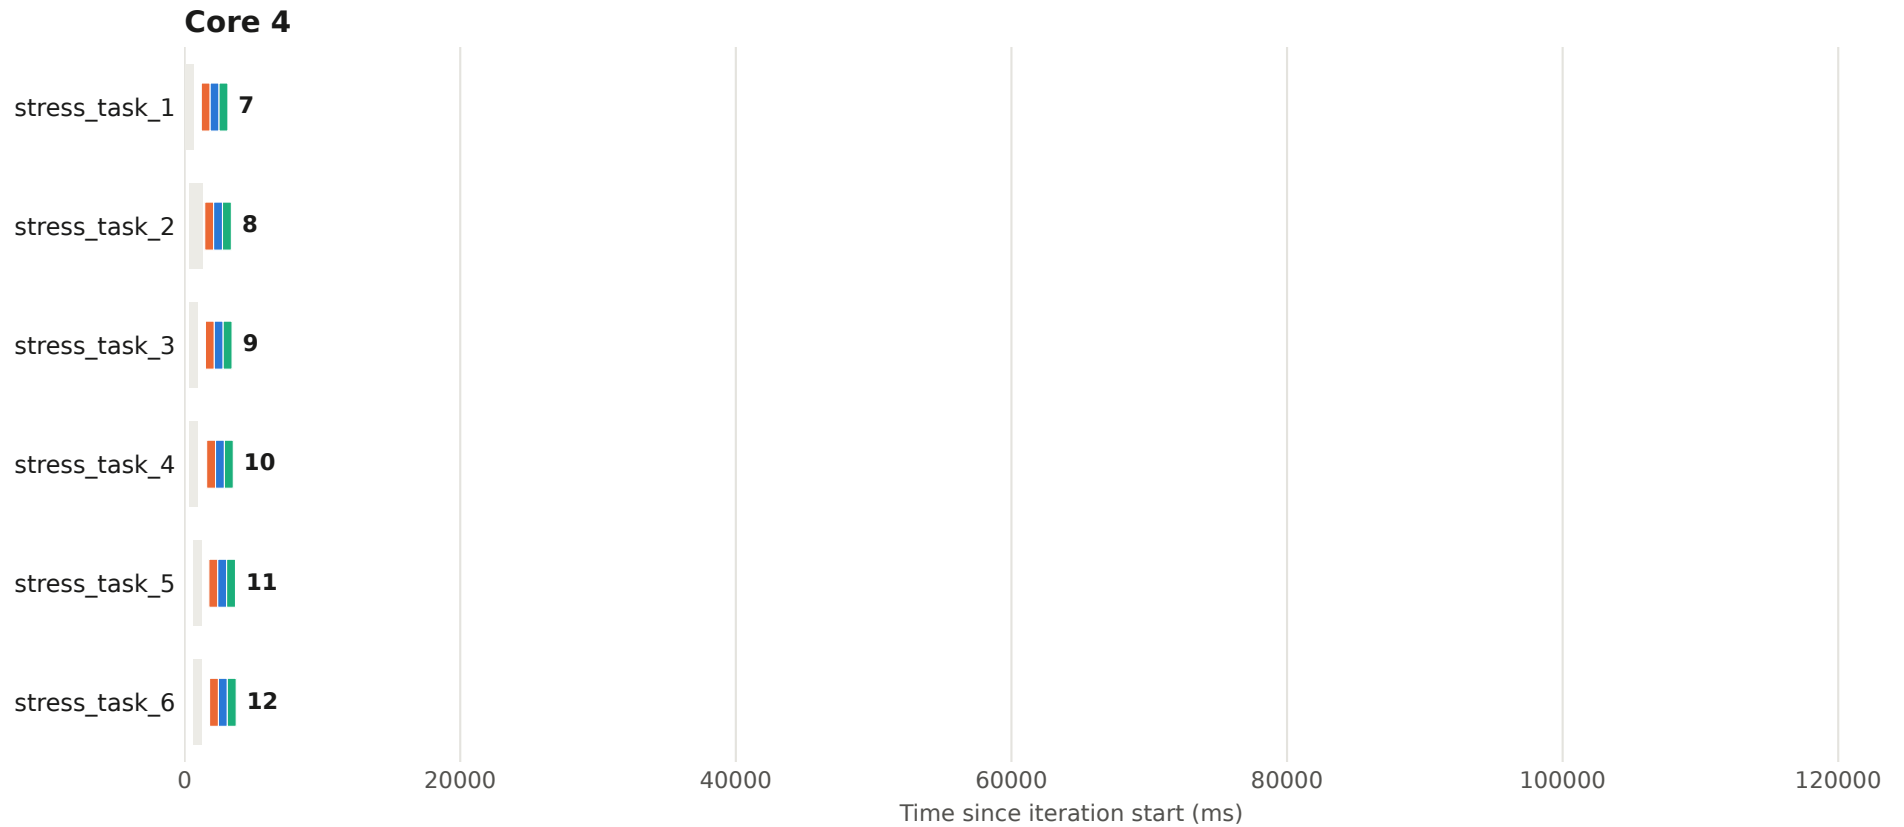


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 61 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

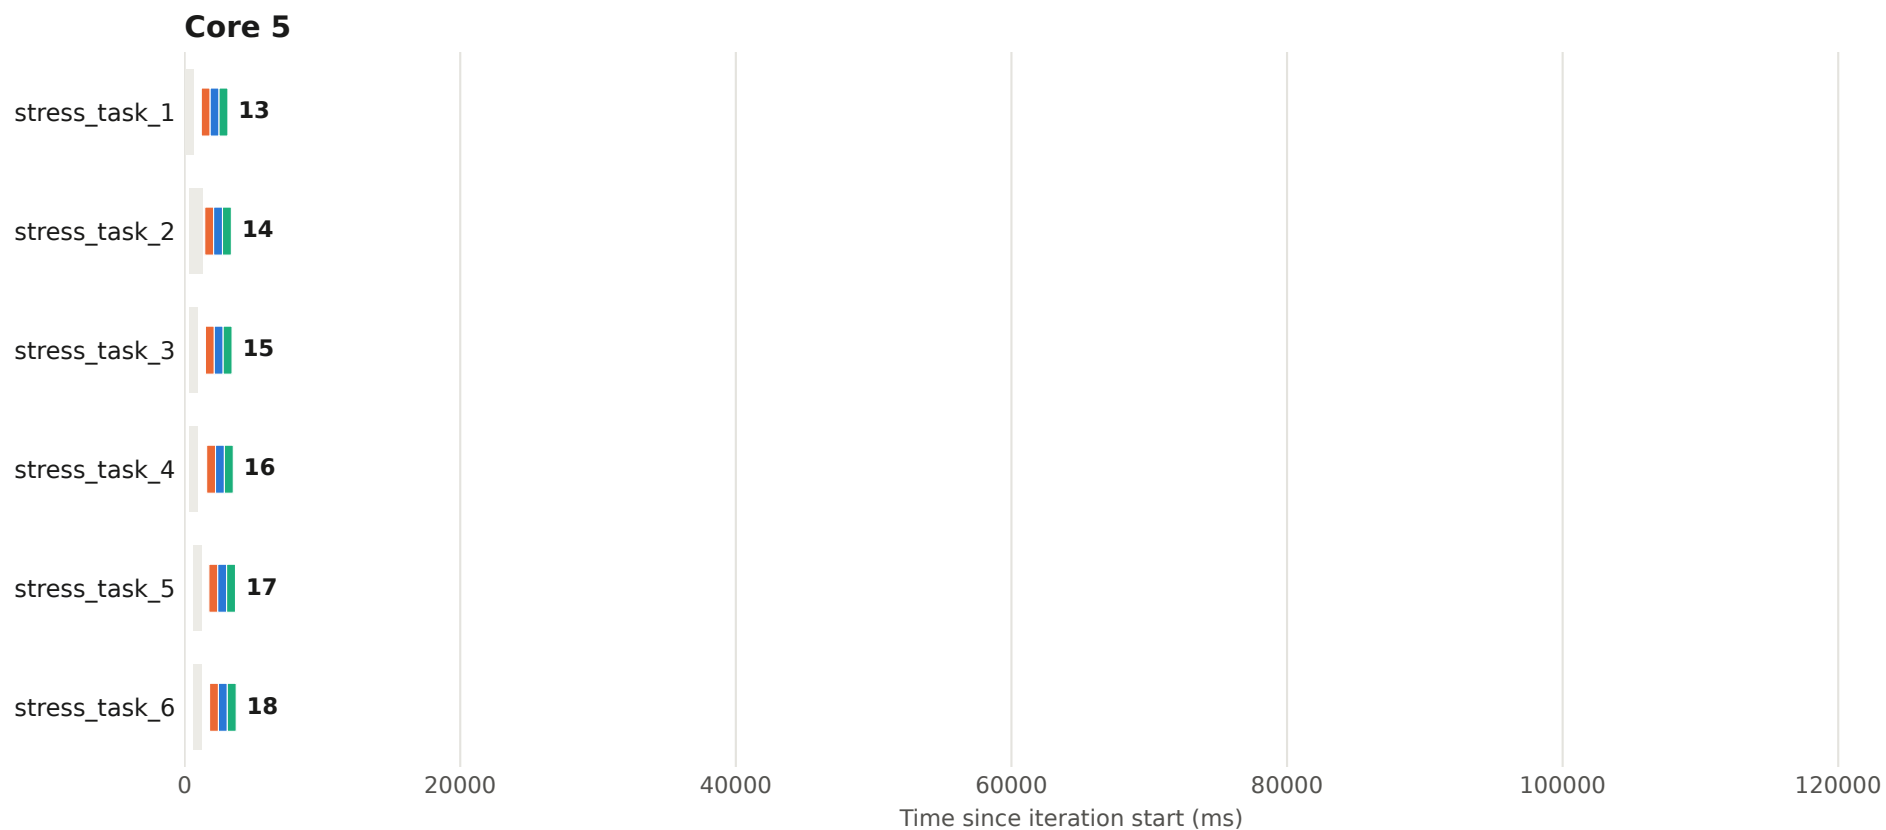


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 61 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

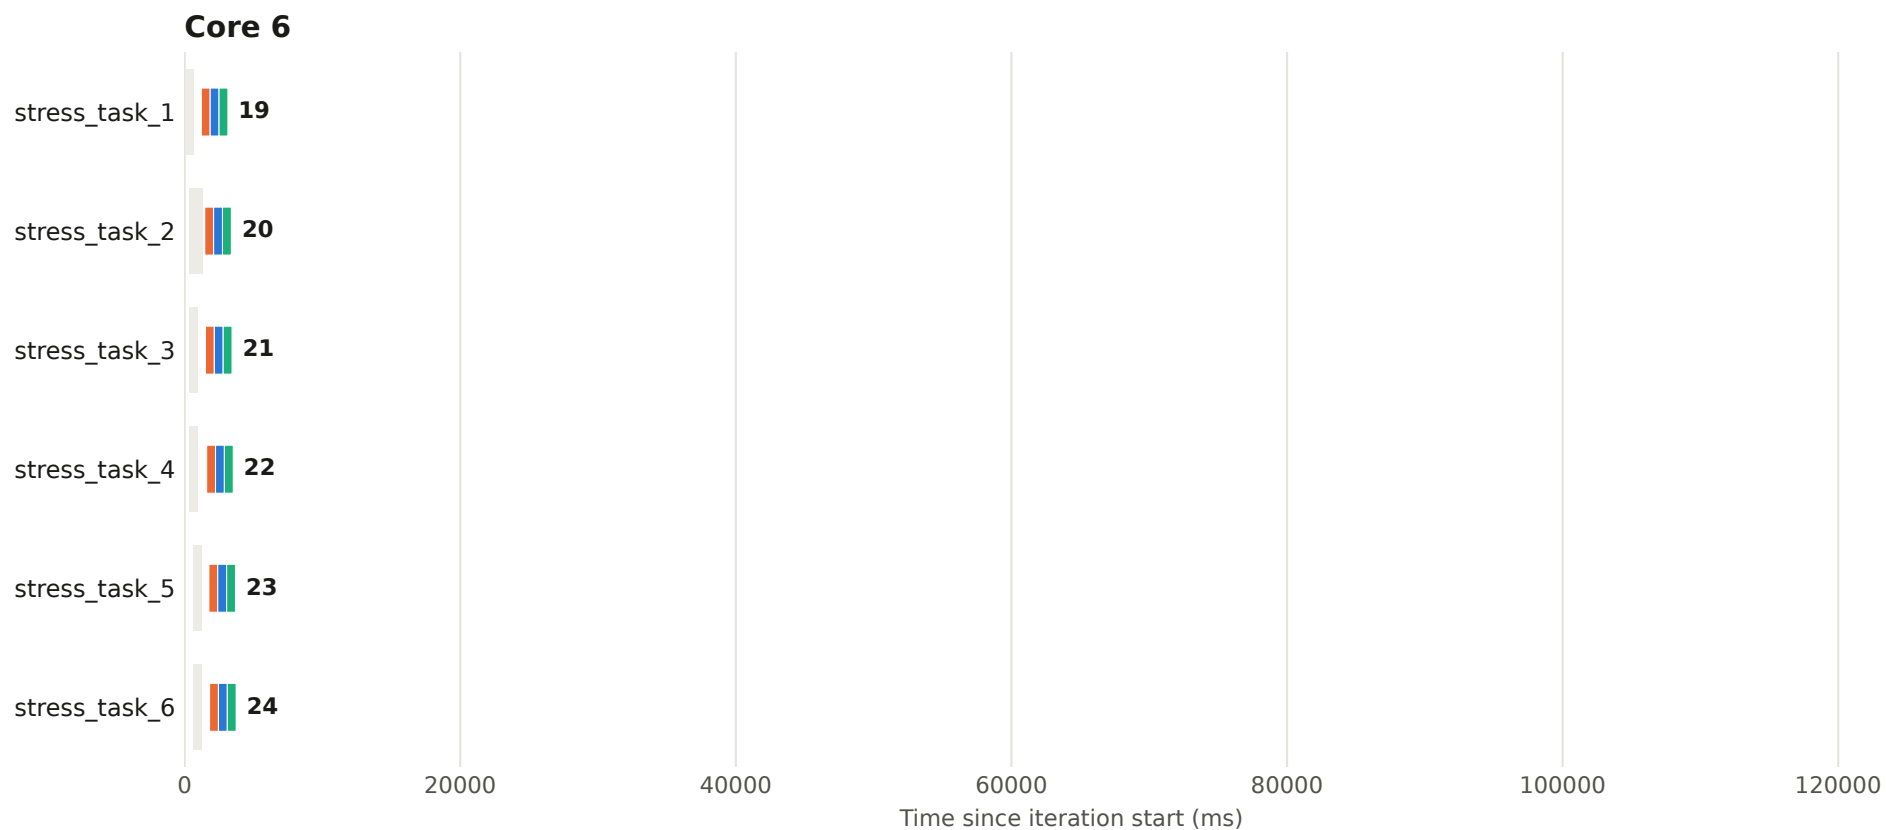


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 61 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

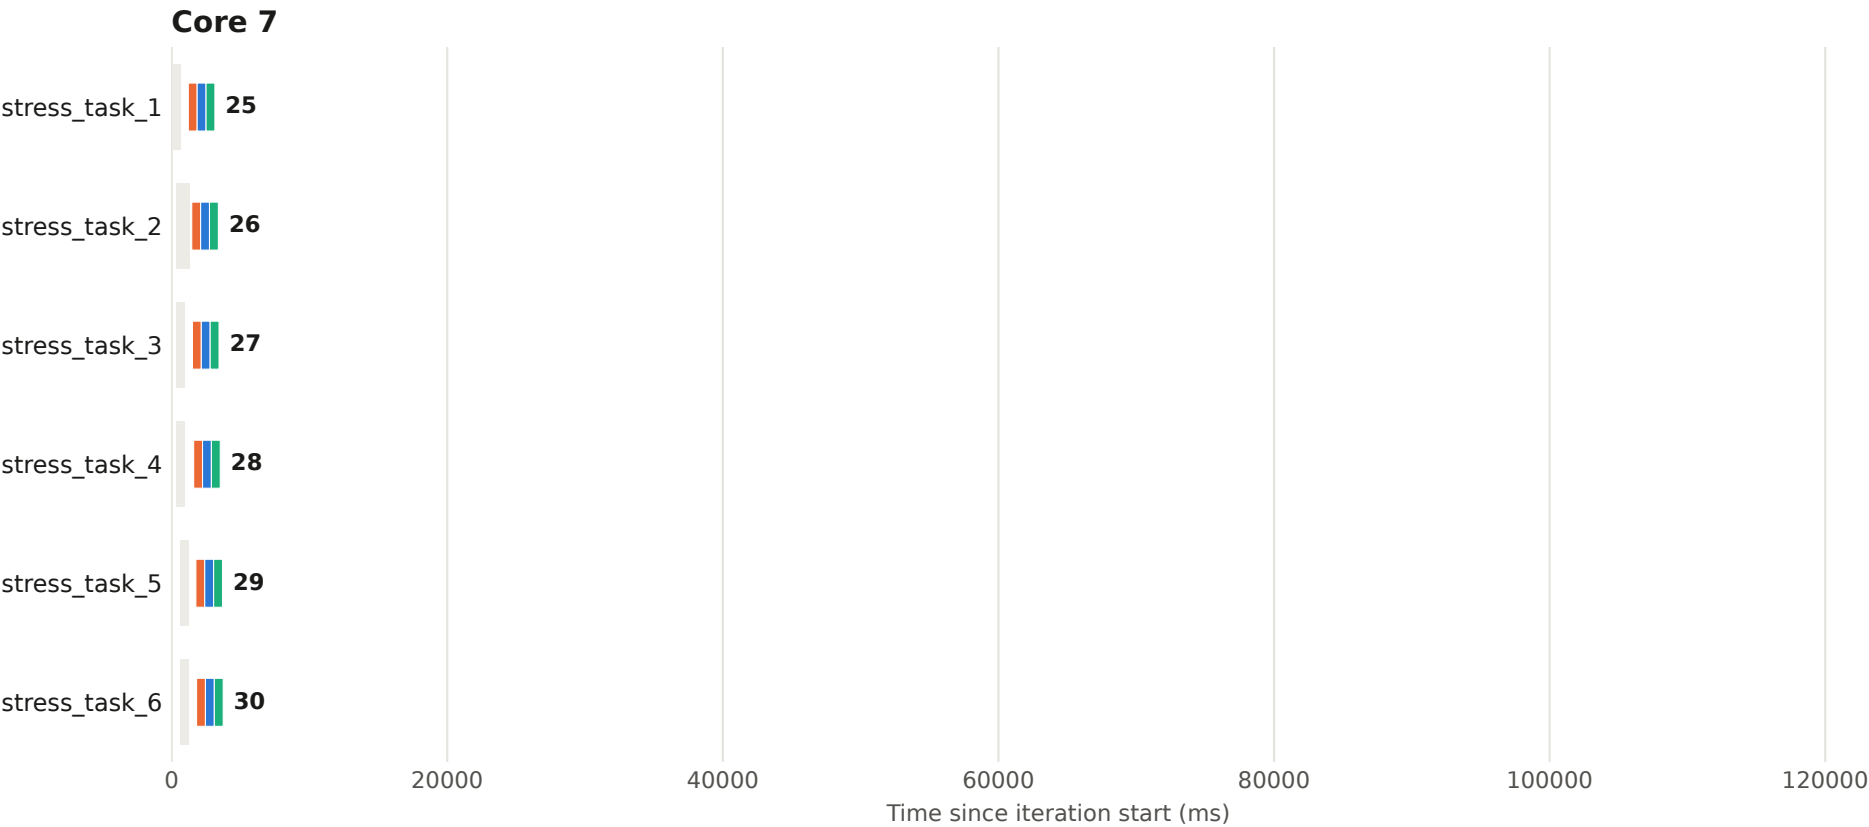


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 62 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

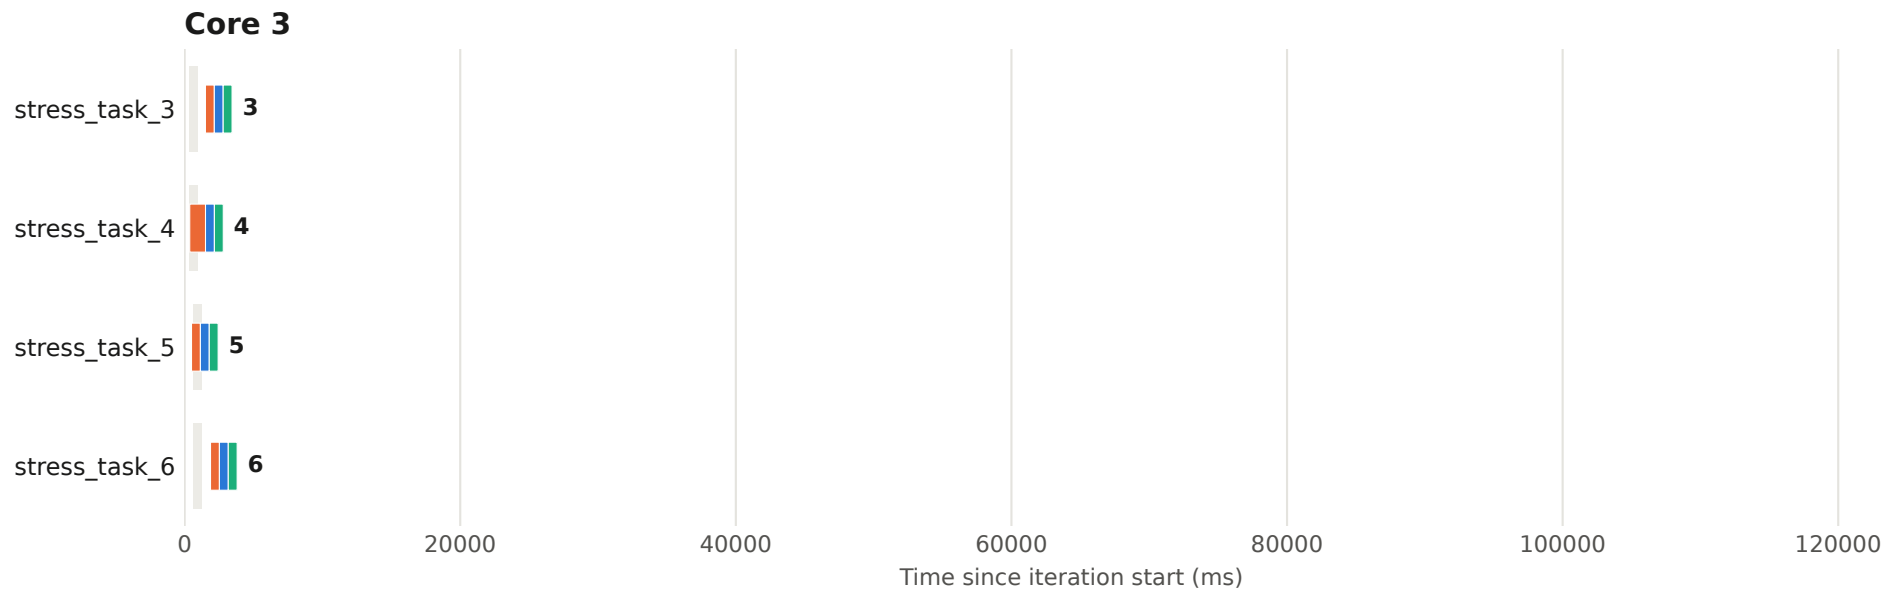

Execution plan - iteration 62 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

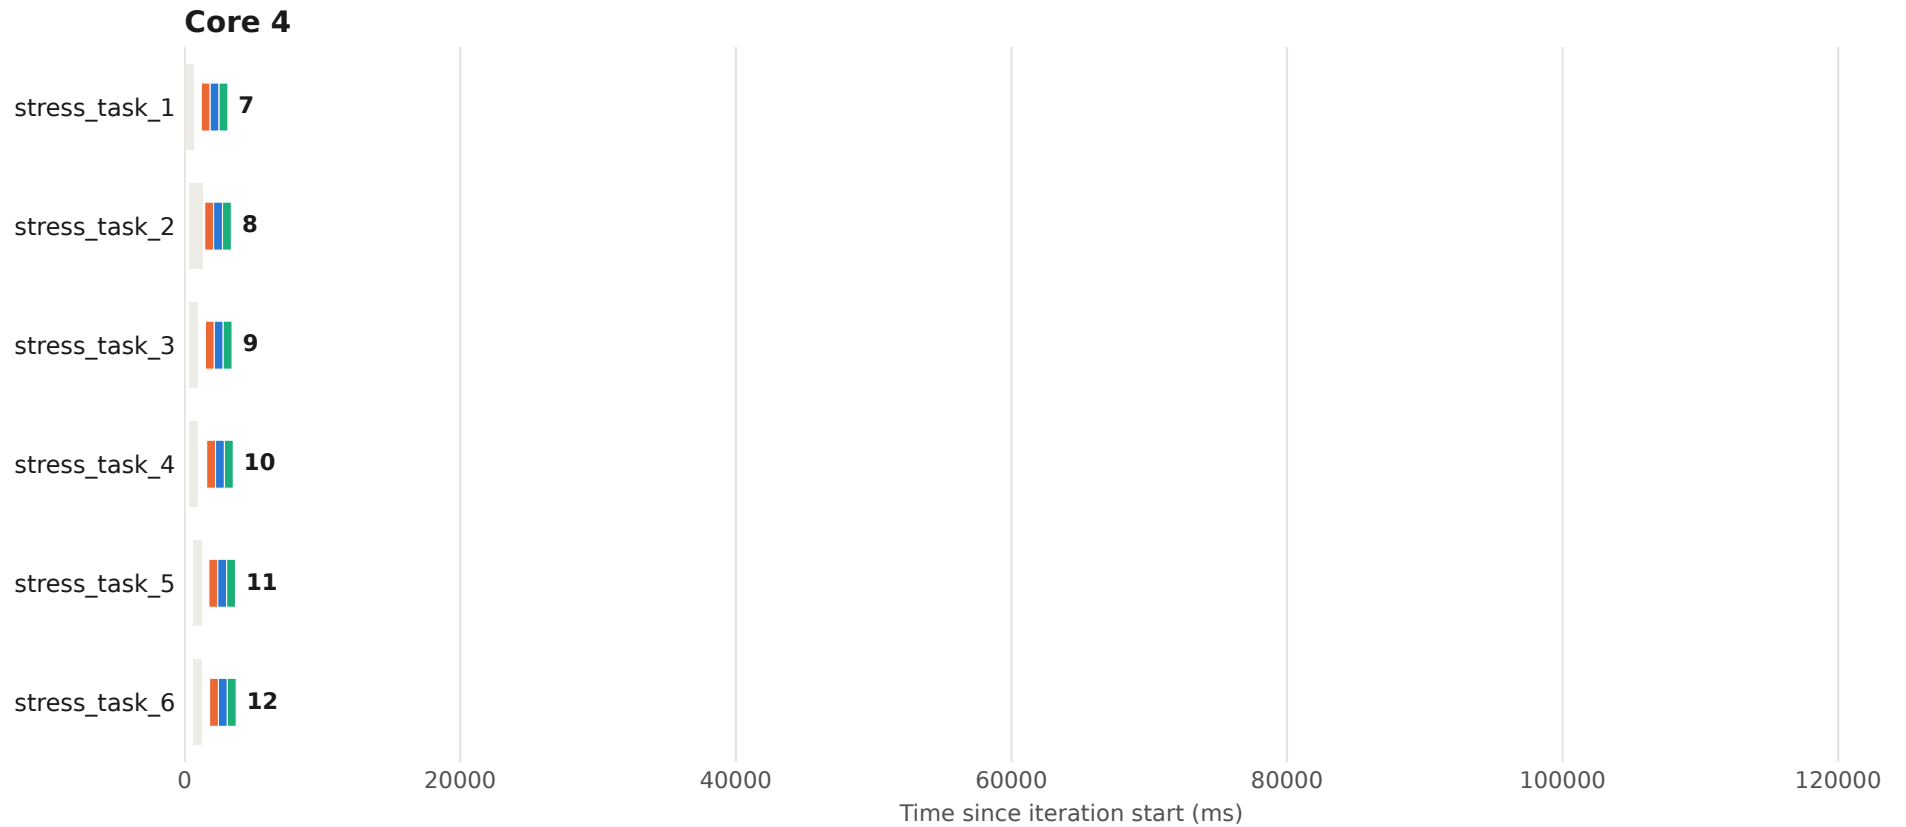


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 62 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

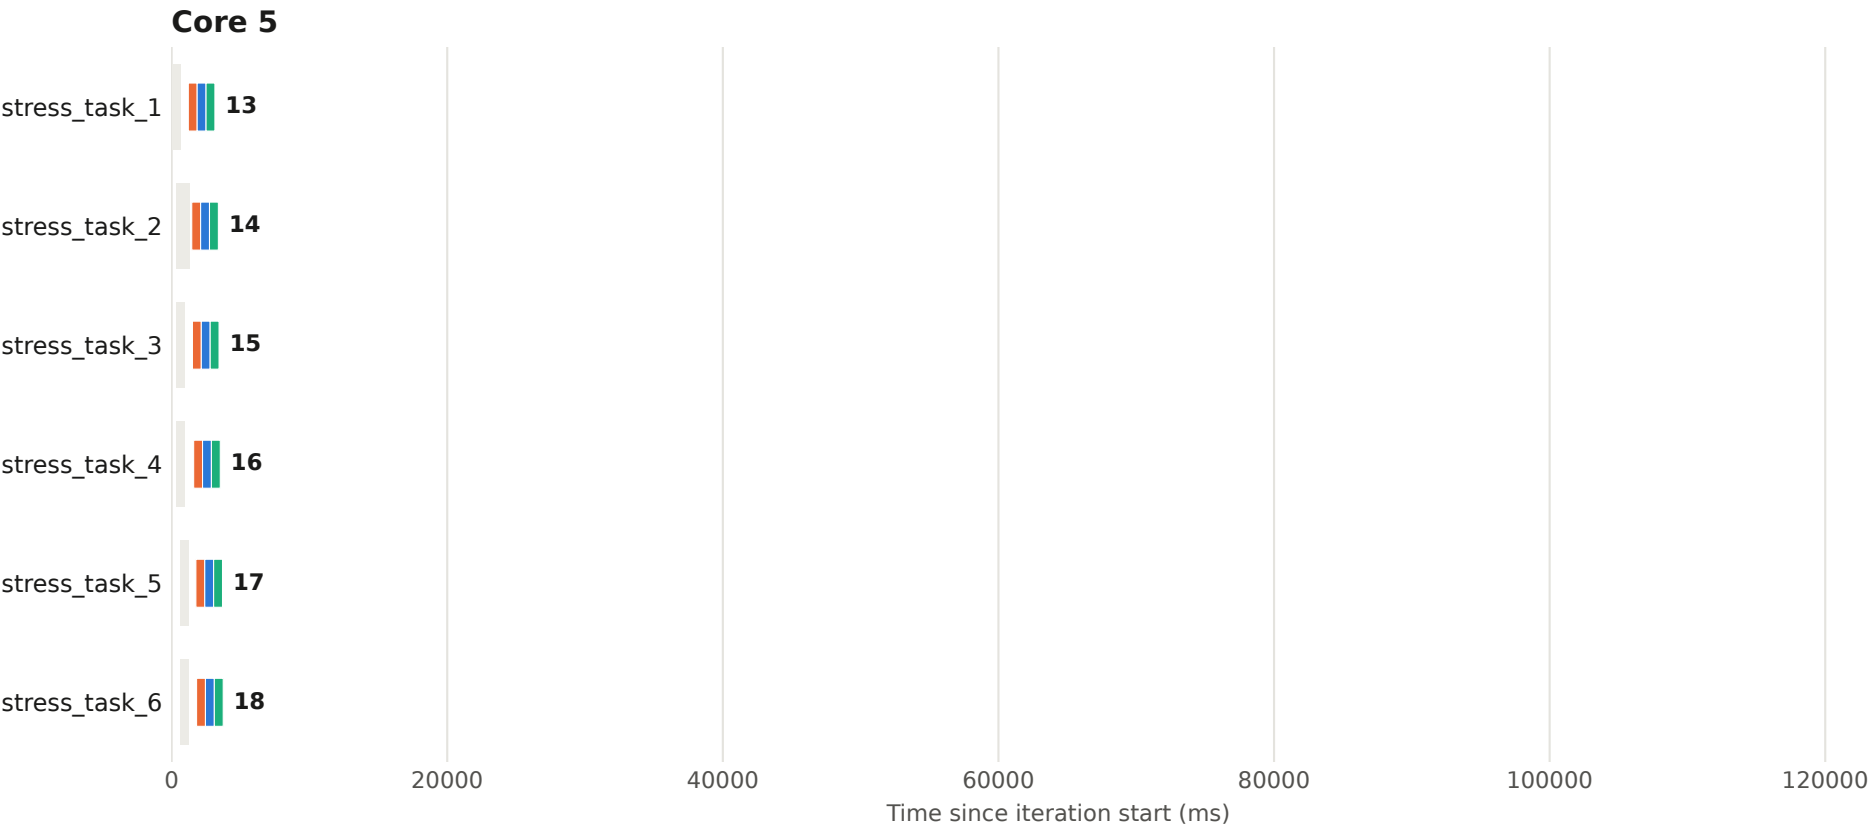


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 62 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

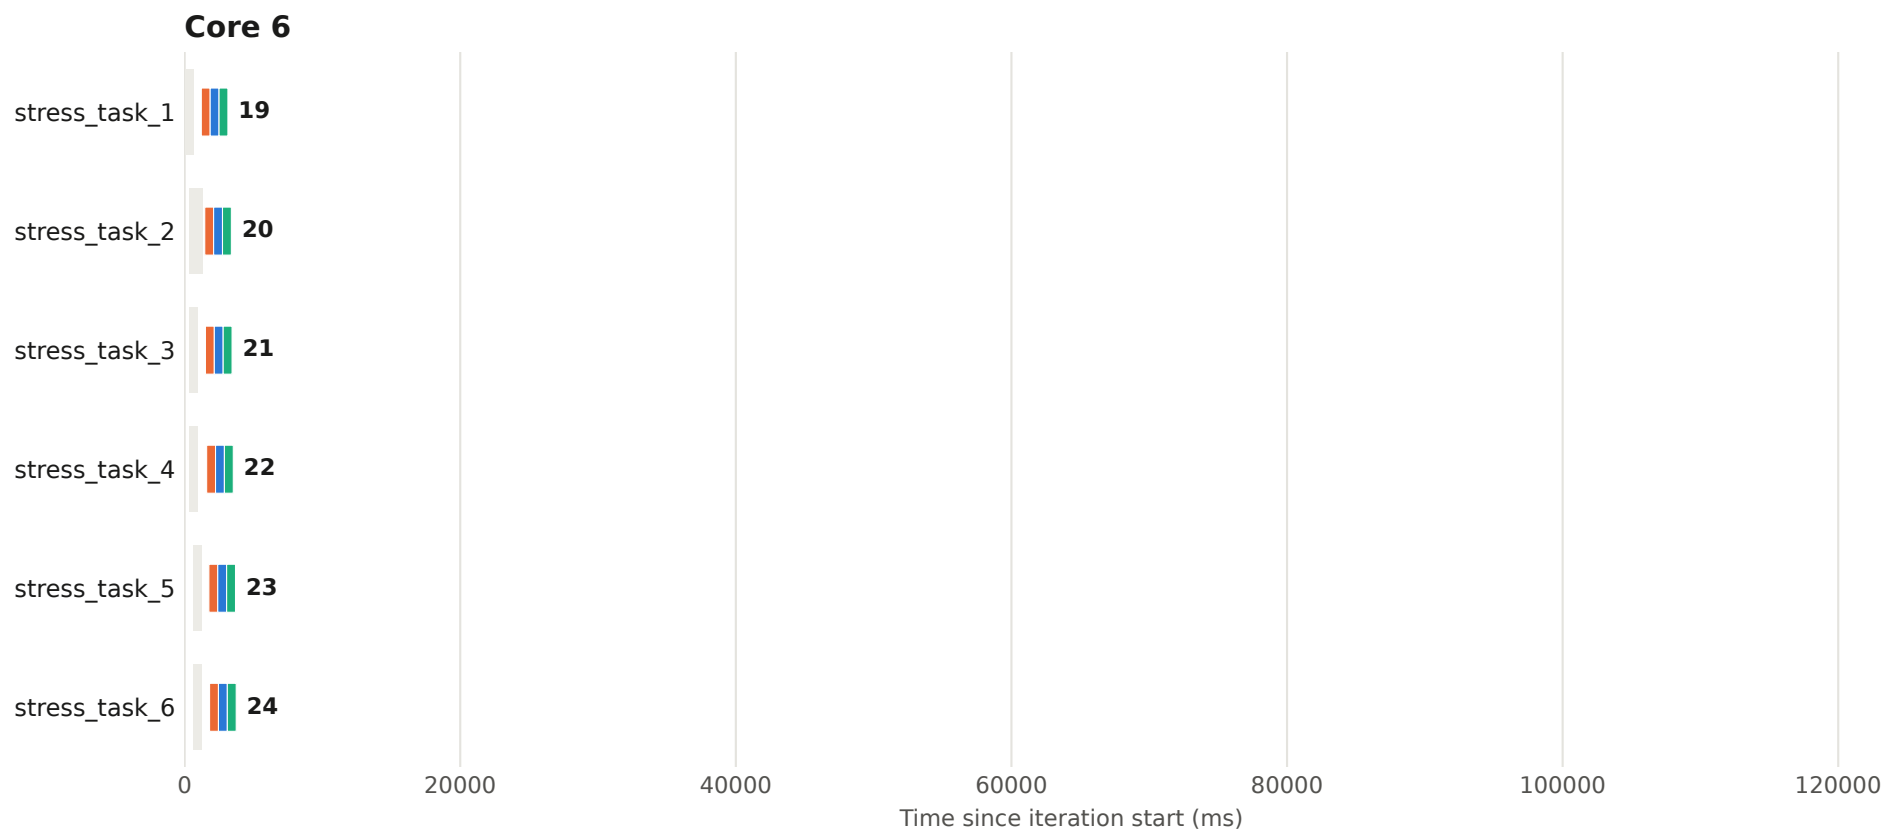


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 62 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

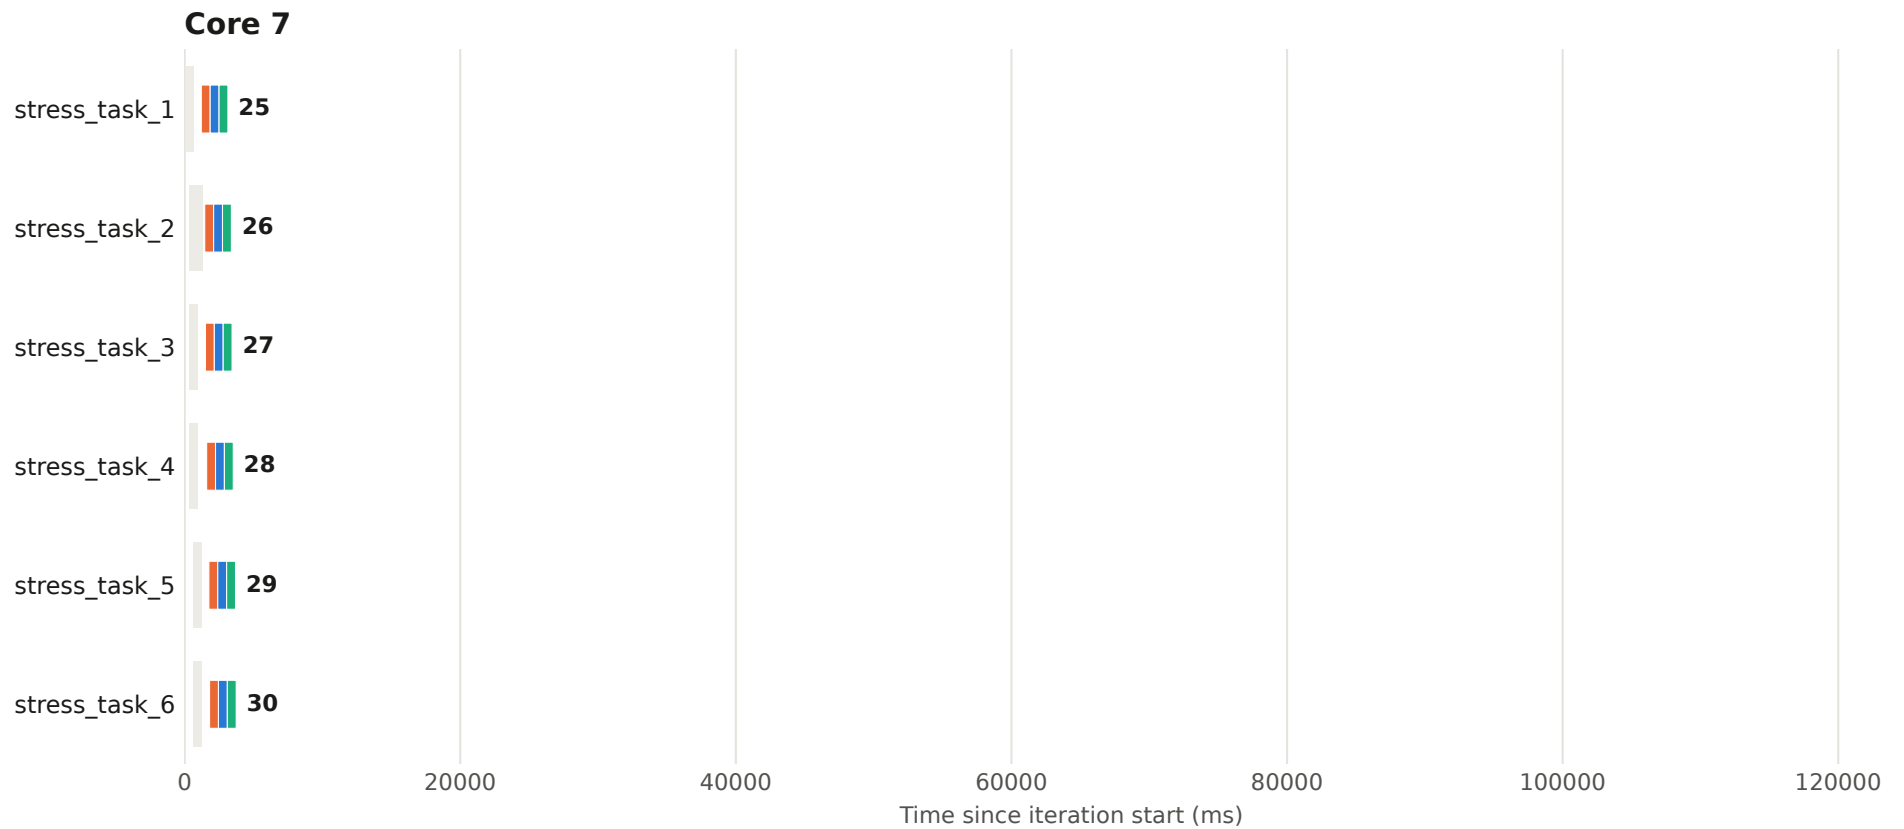


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 63 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

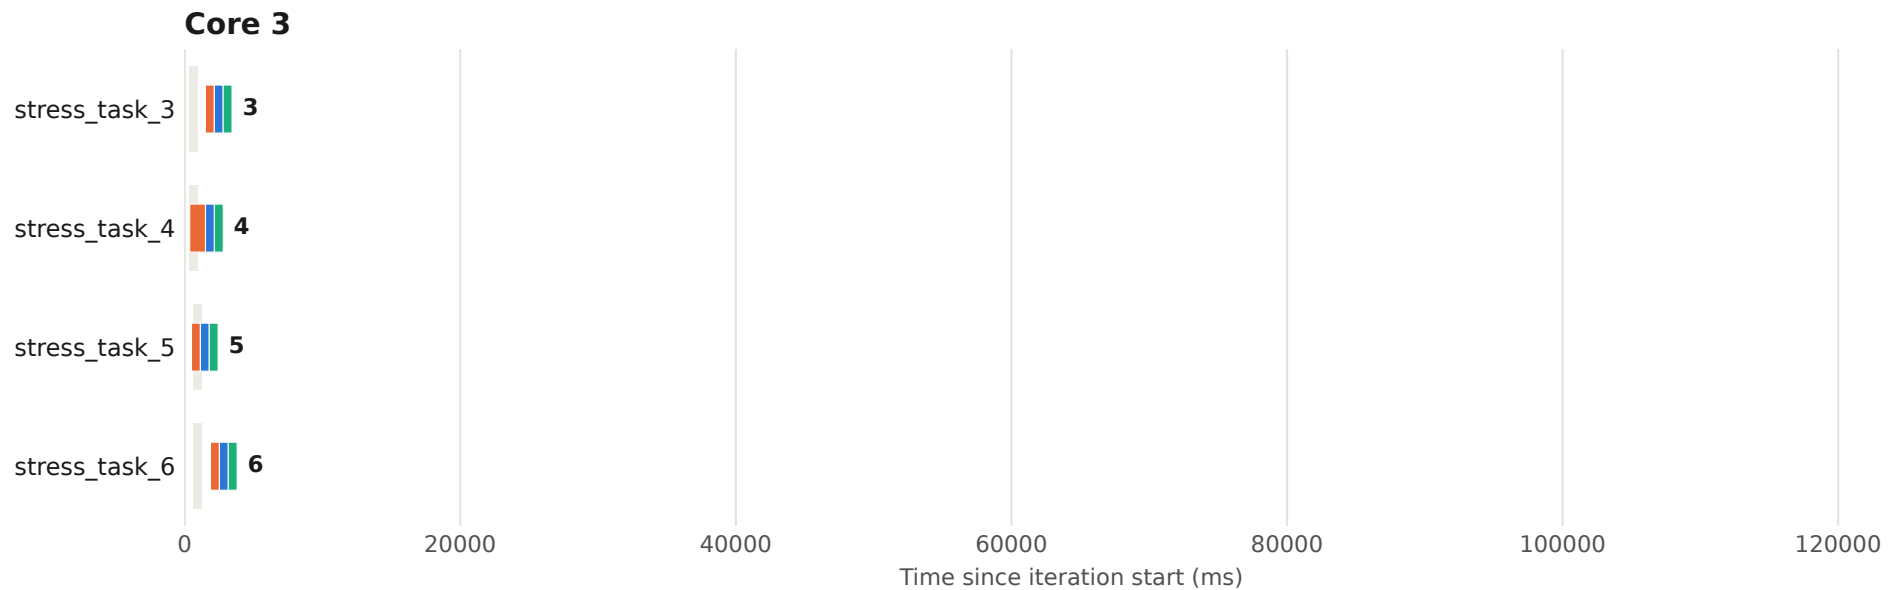

Execution plan - iteration 63 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

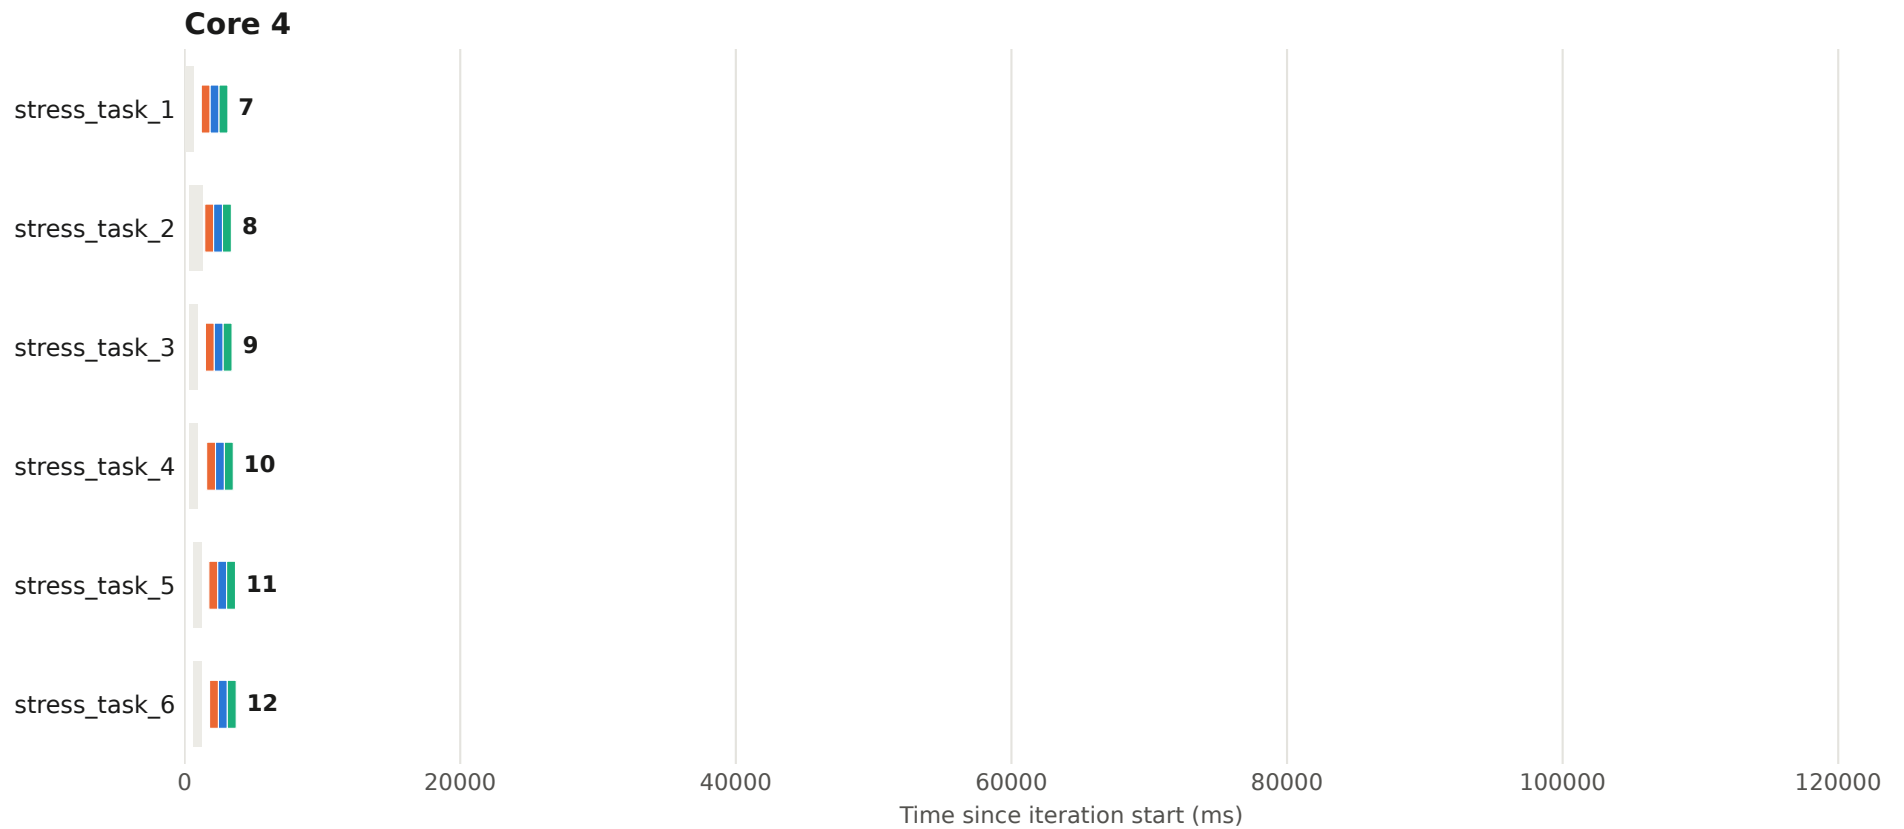


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 63 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

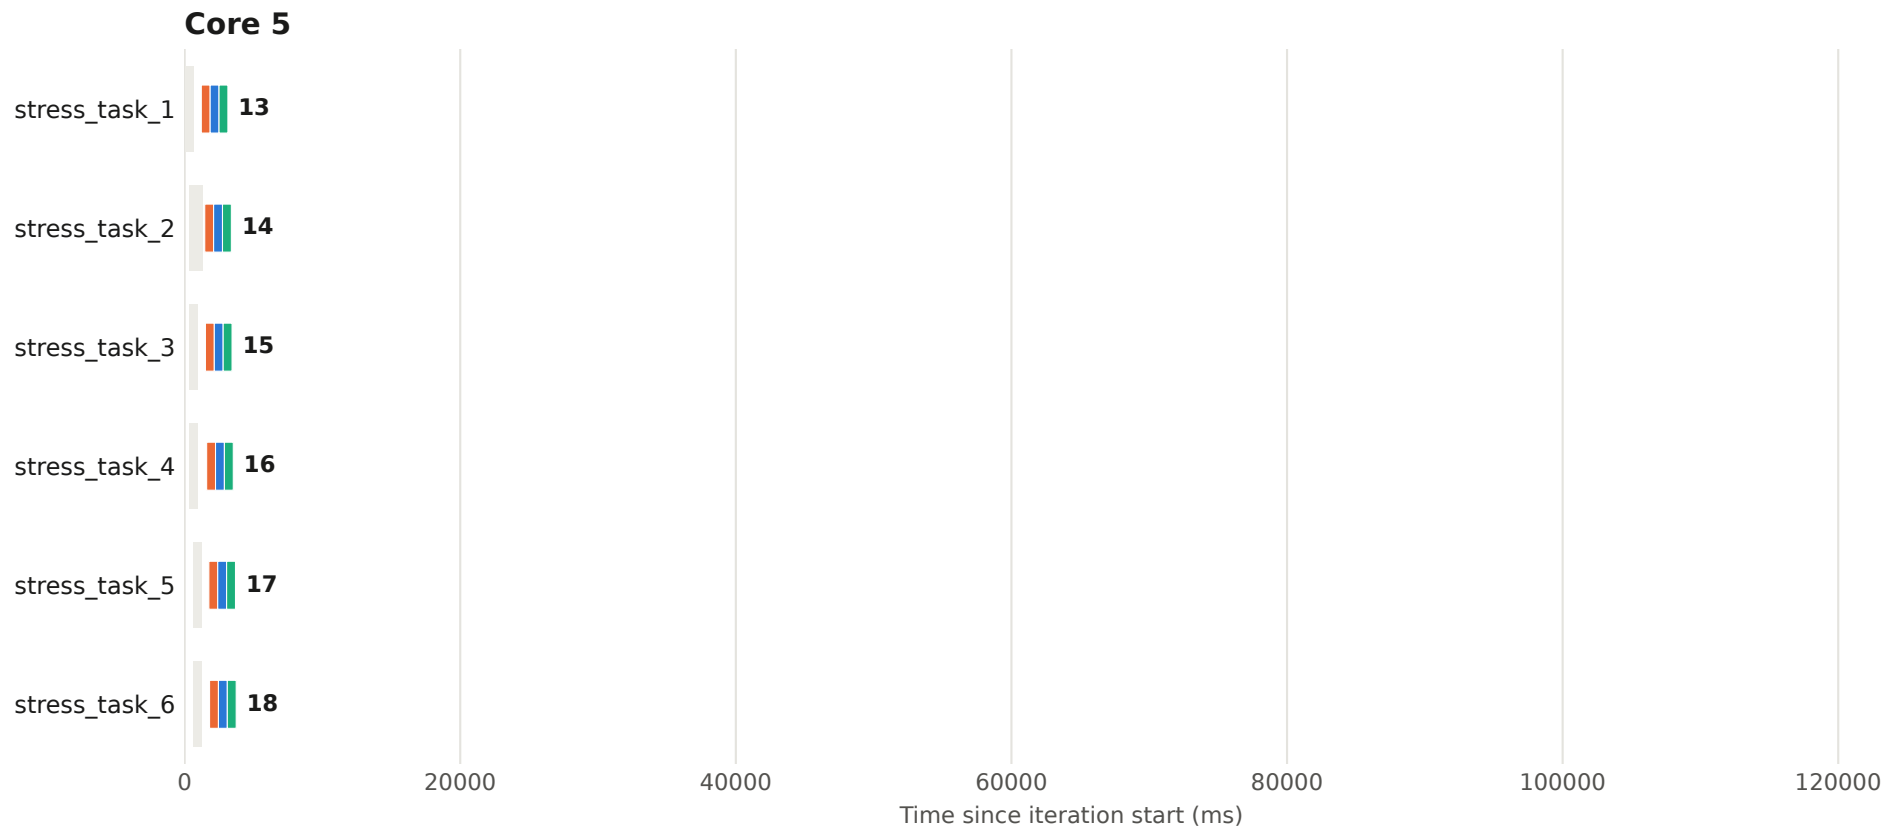


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 63 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

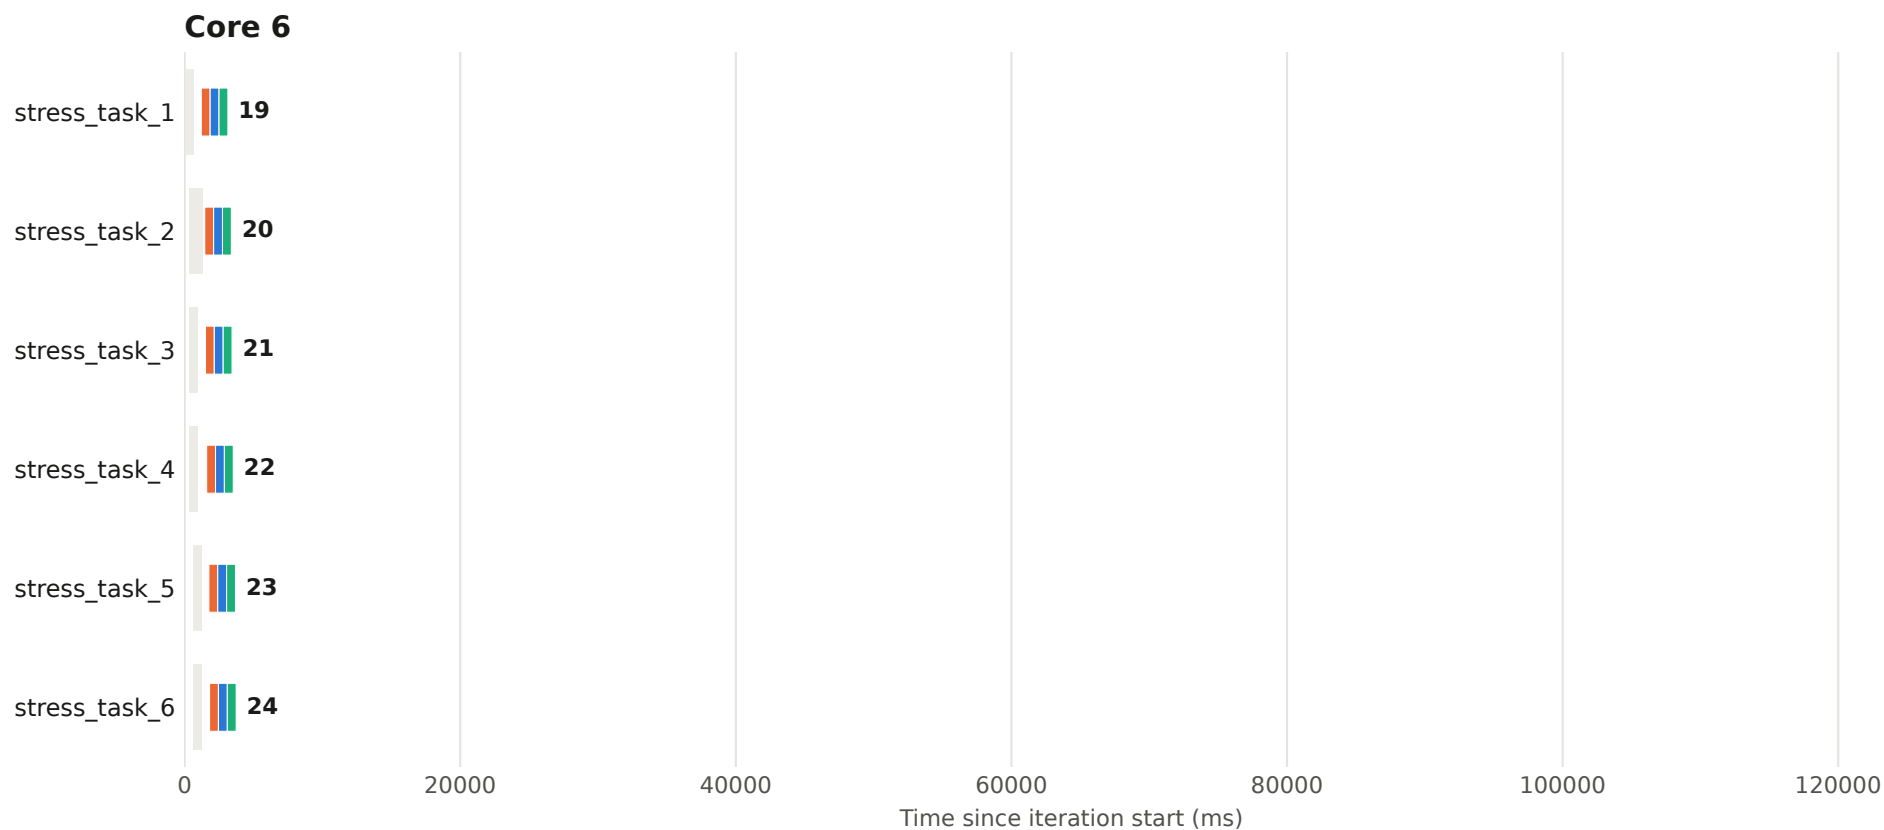


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 63 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

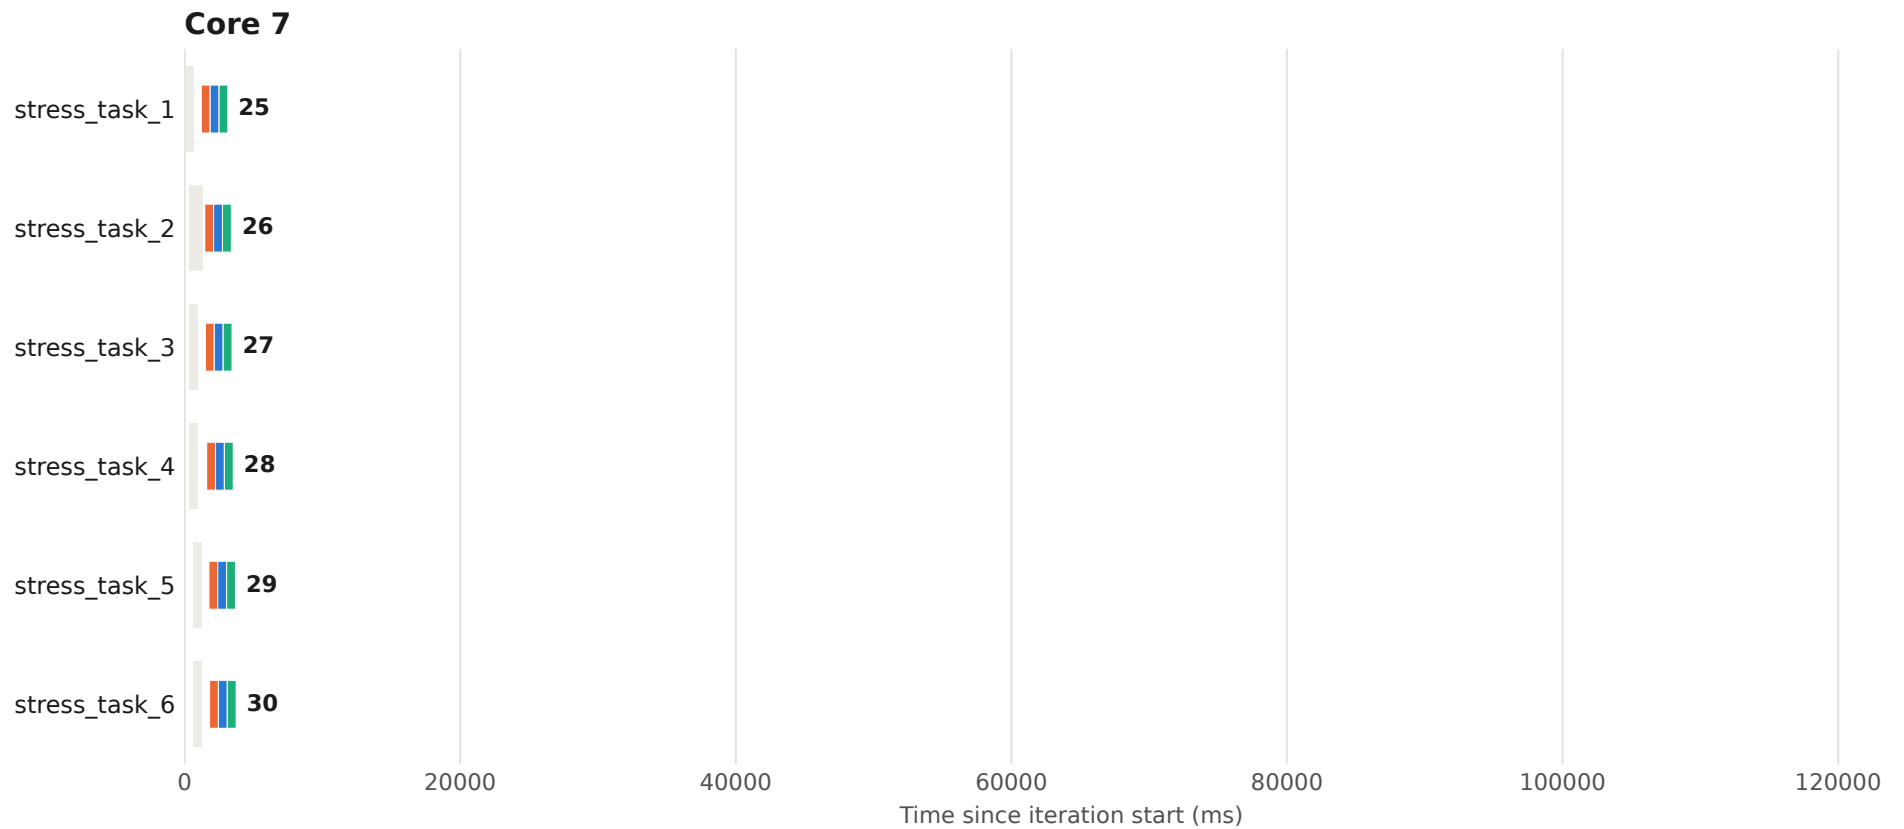


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 64 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

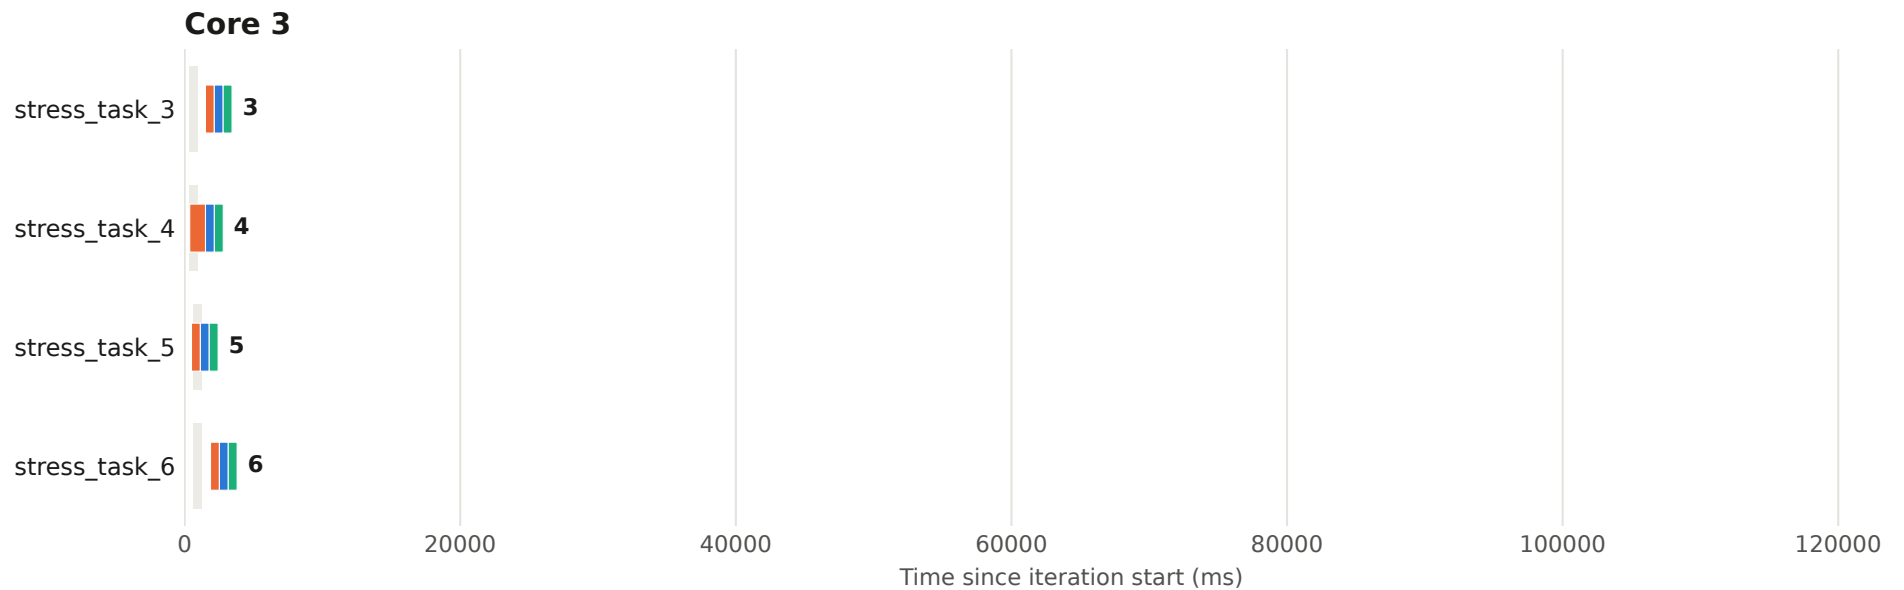

Execution plan - iteration 64 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

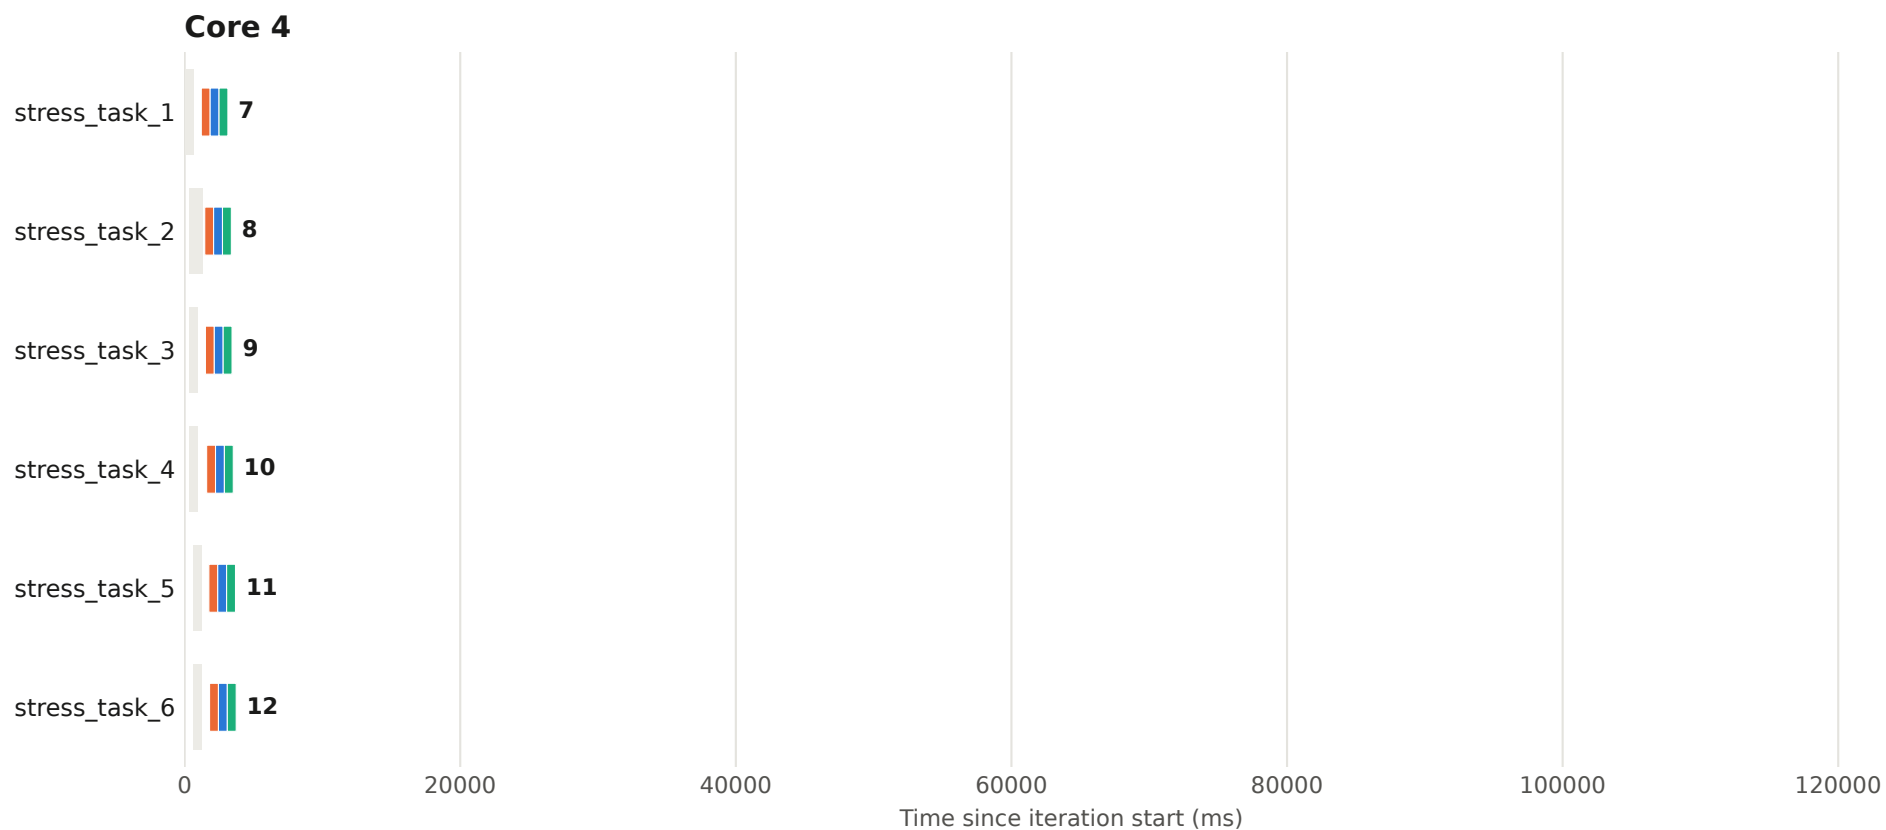


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 64 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

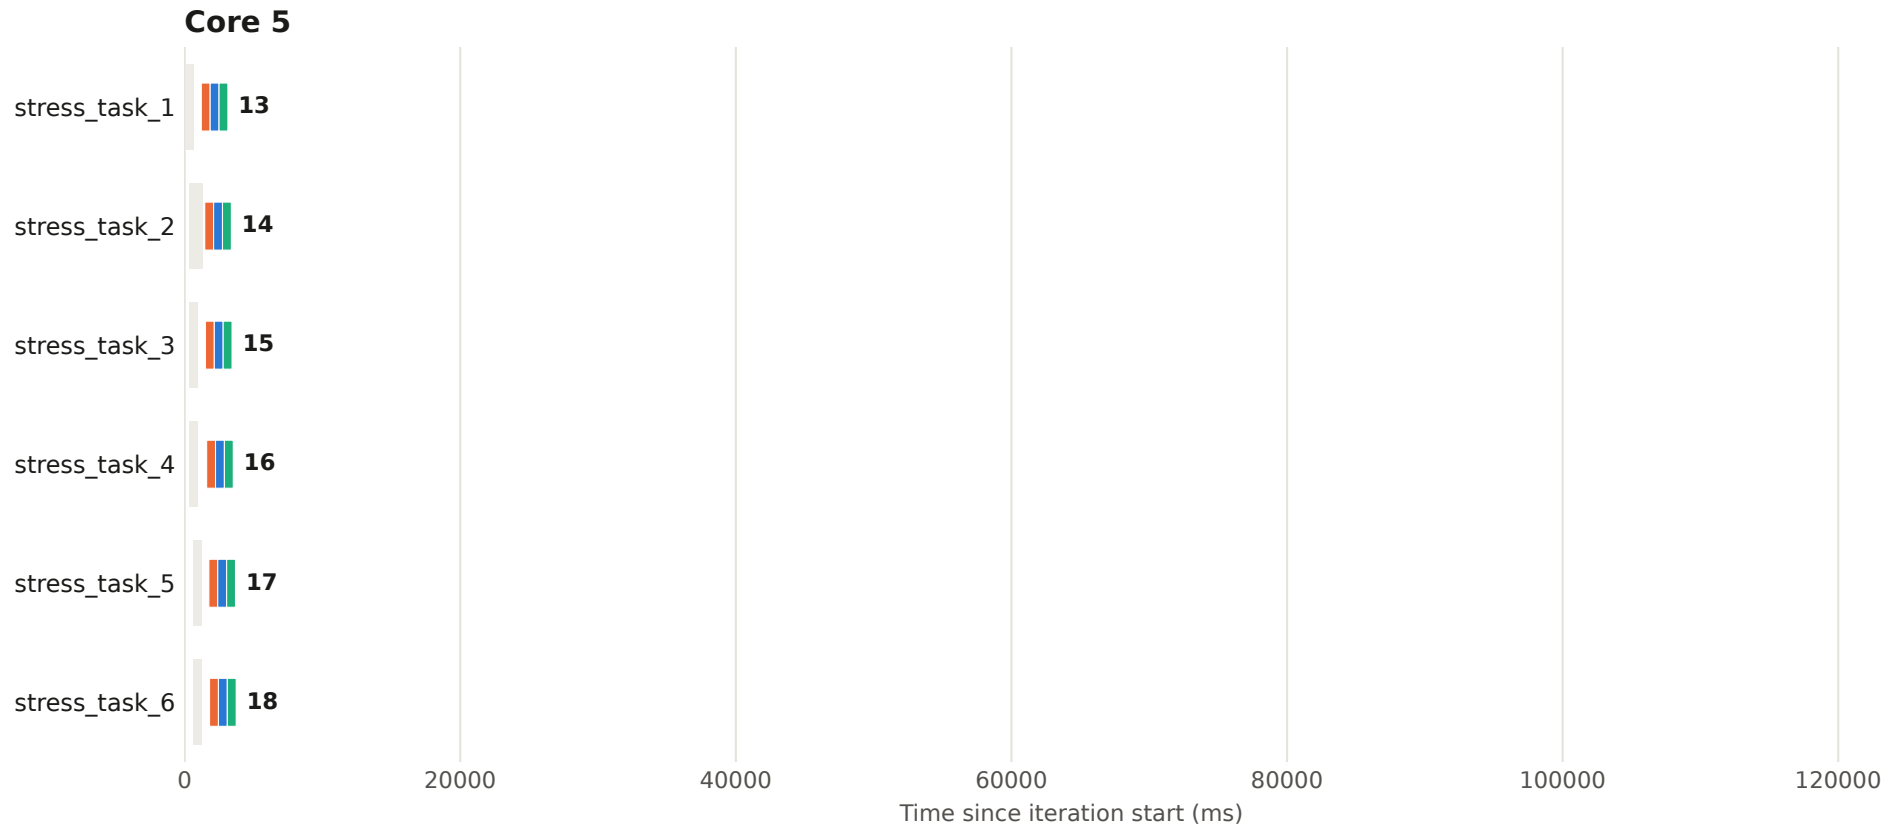


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 64 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

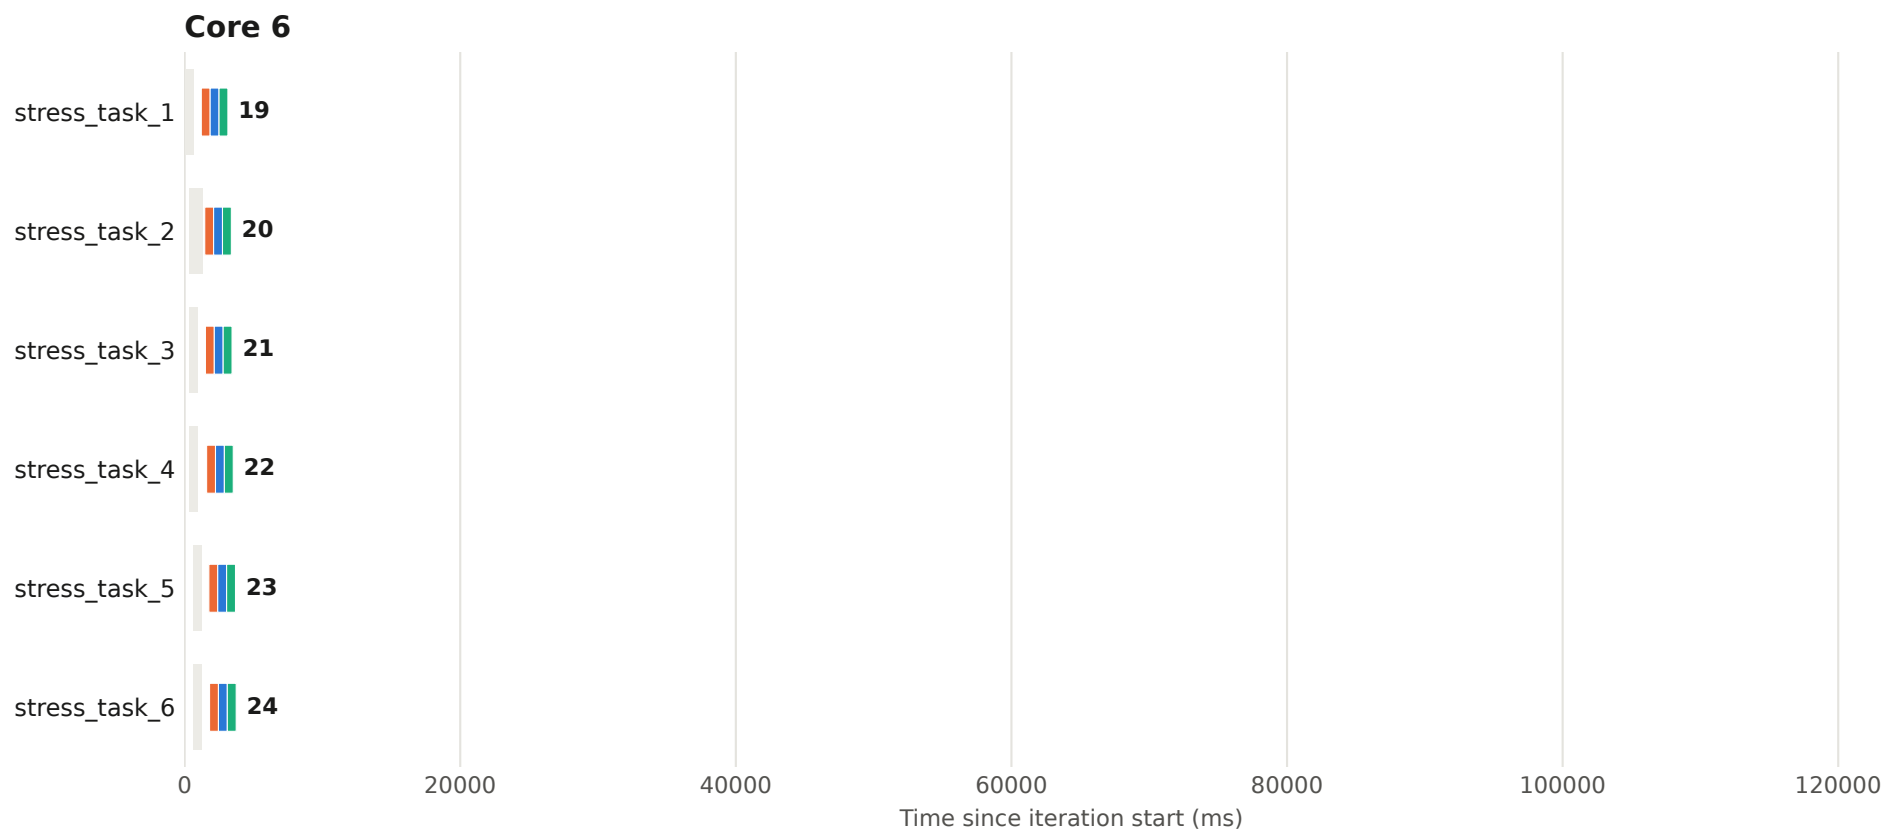


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 64 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

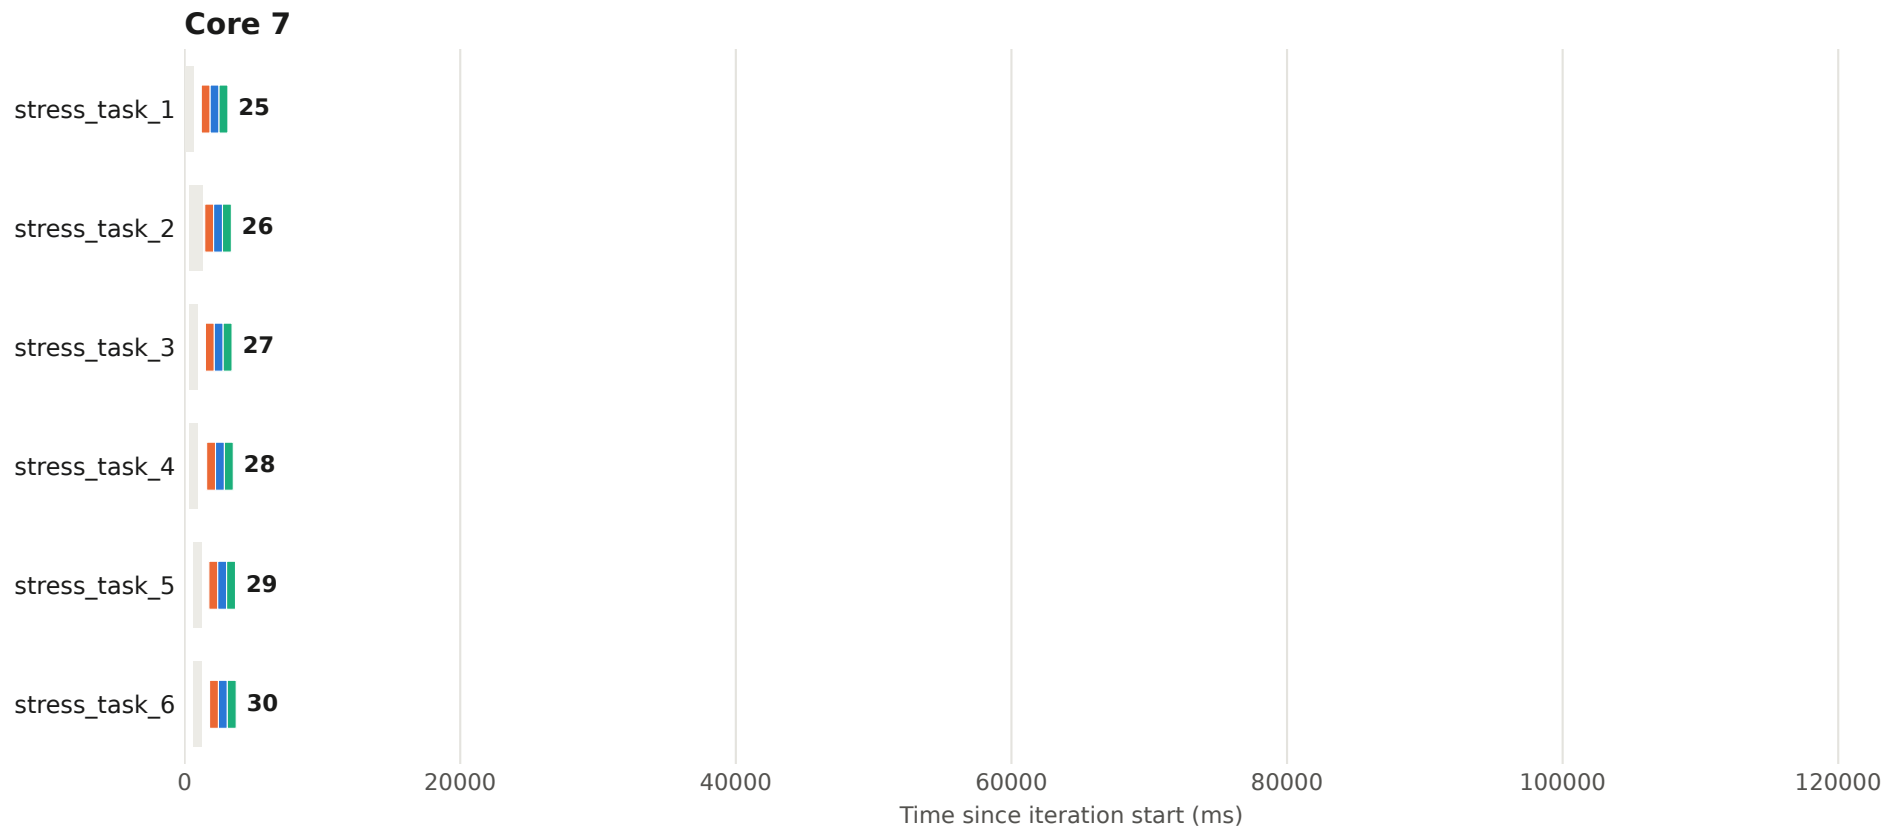


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 65 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

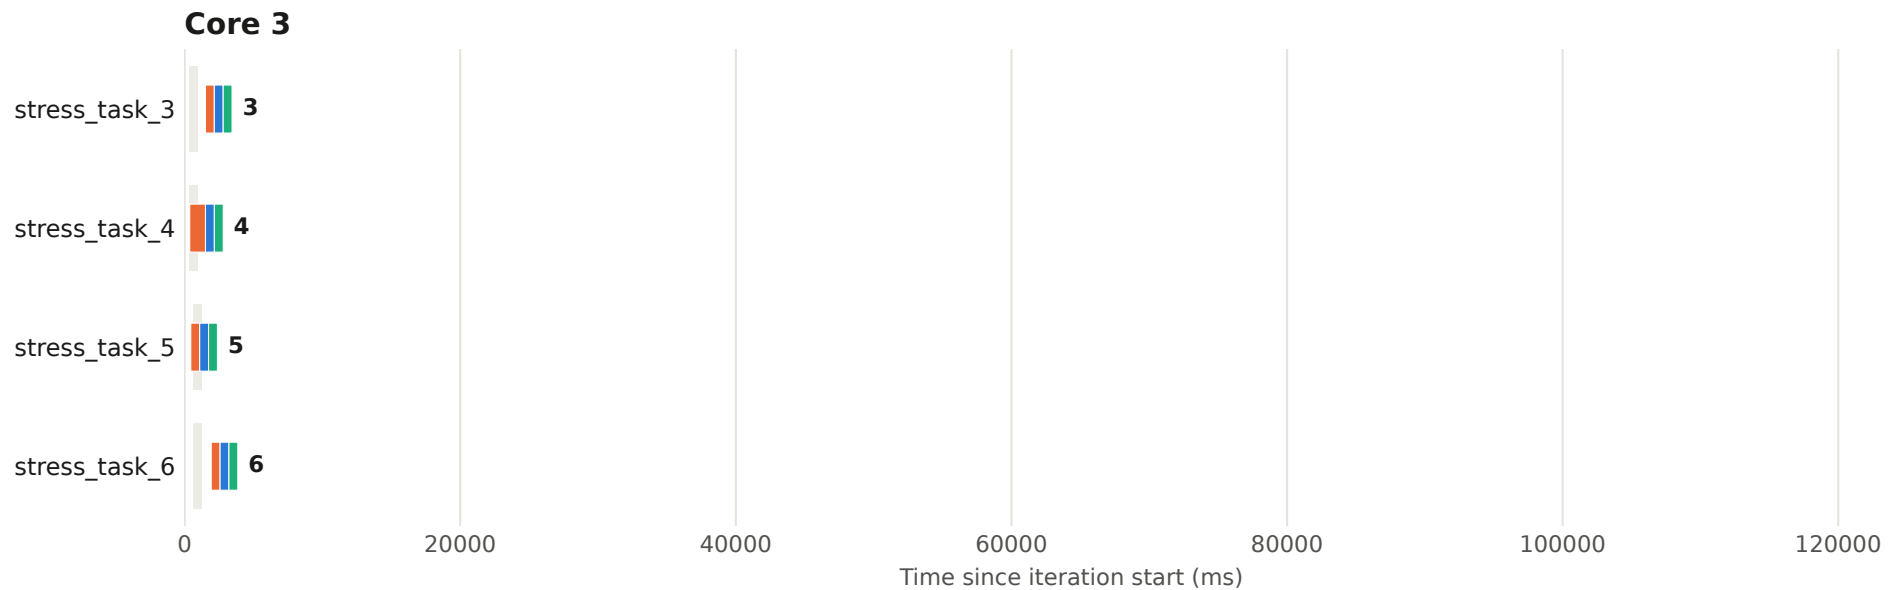


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 65 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

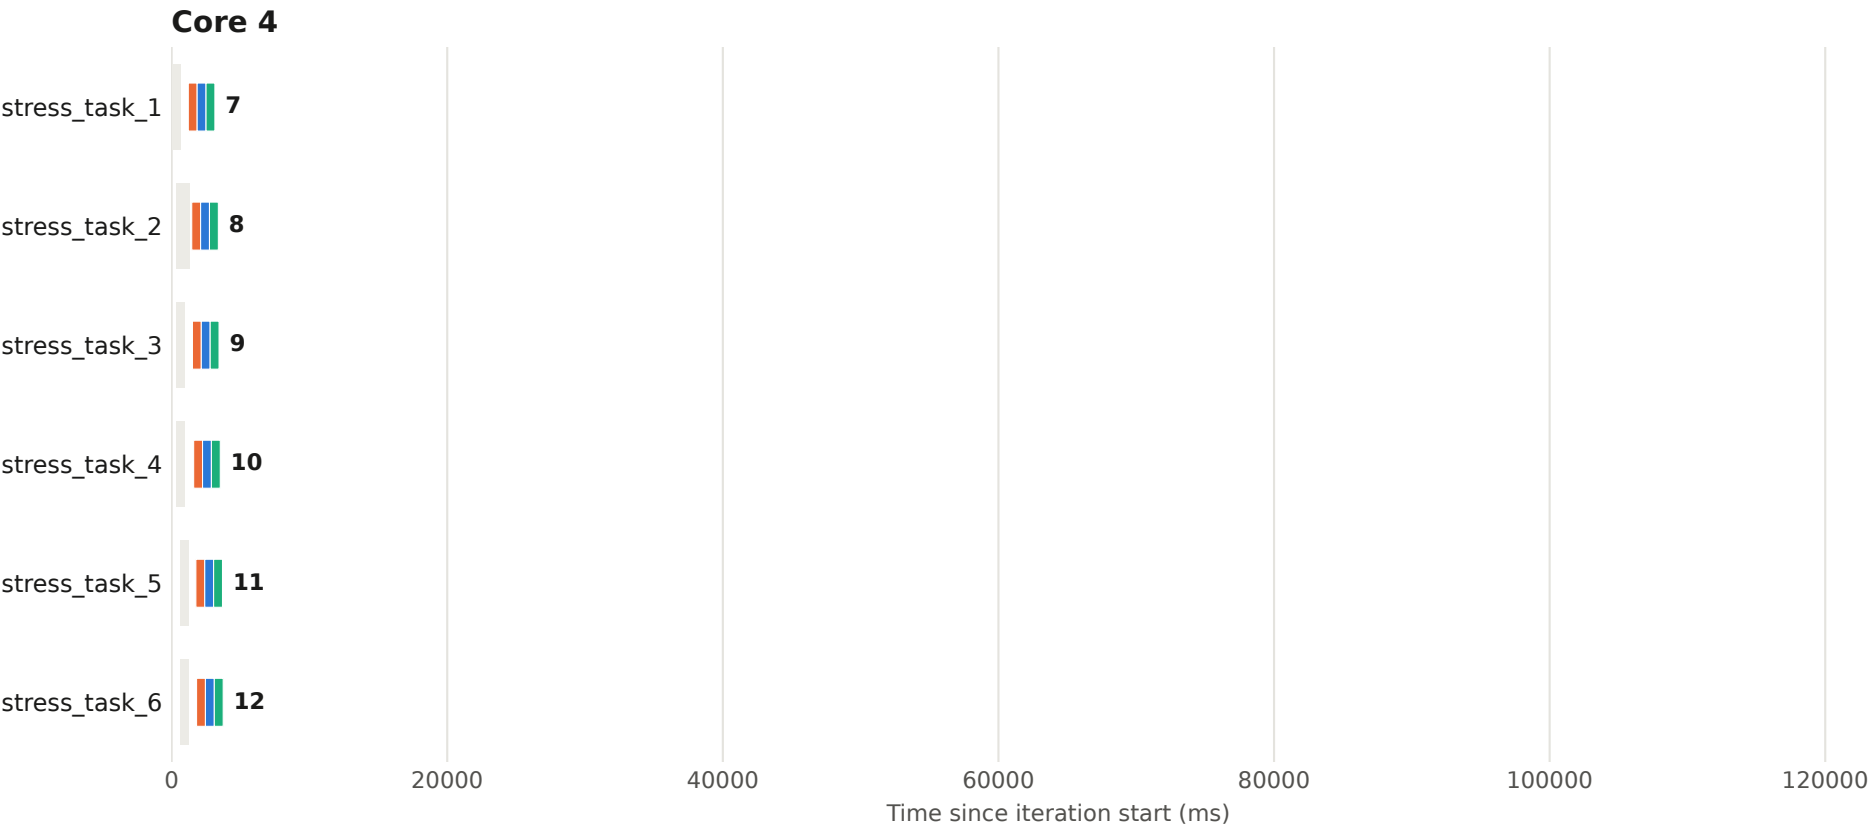


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 65 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

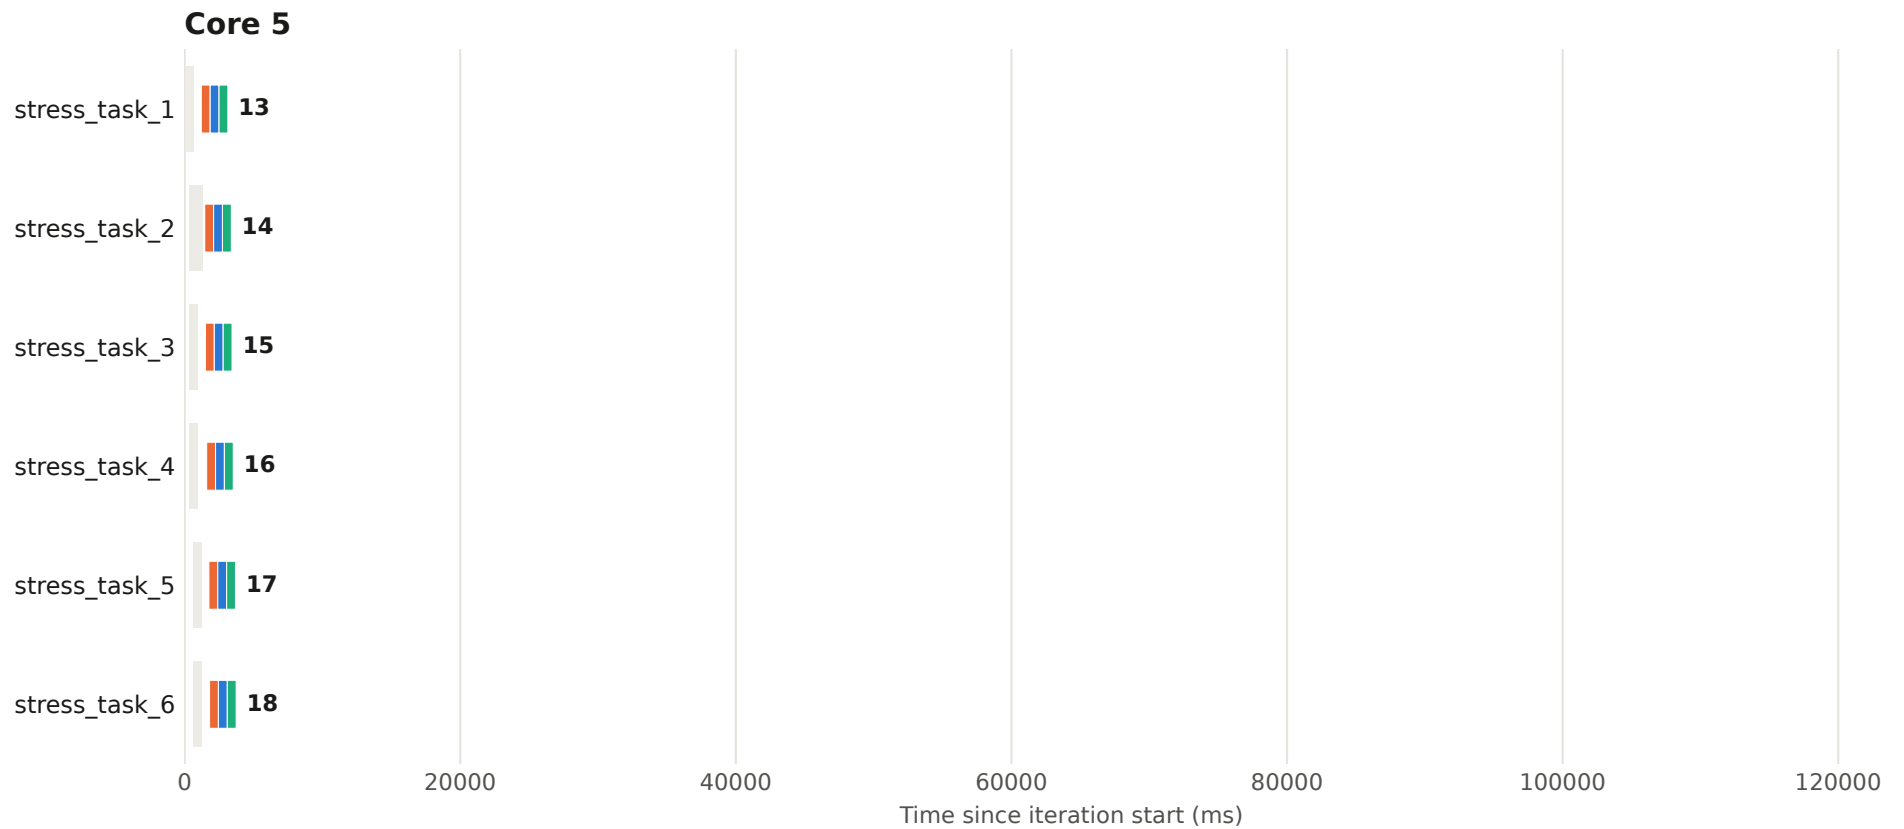


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 65 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

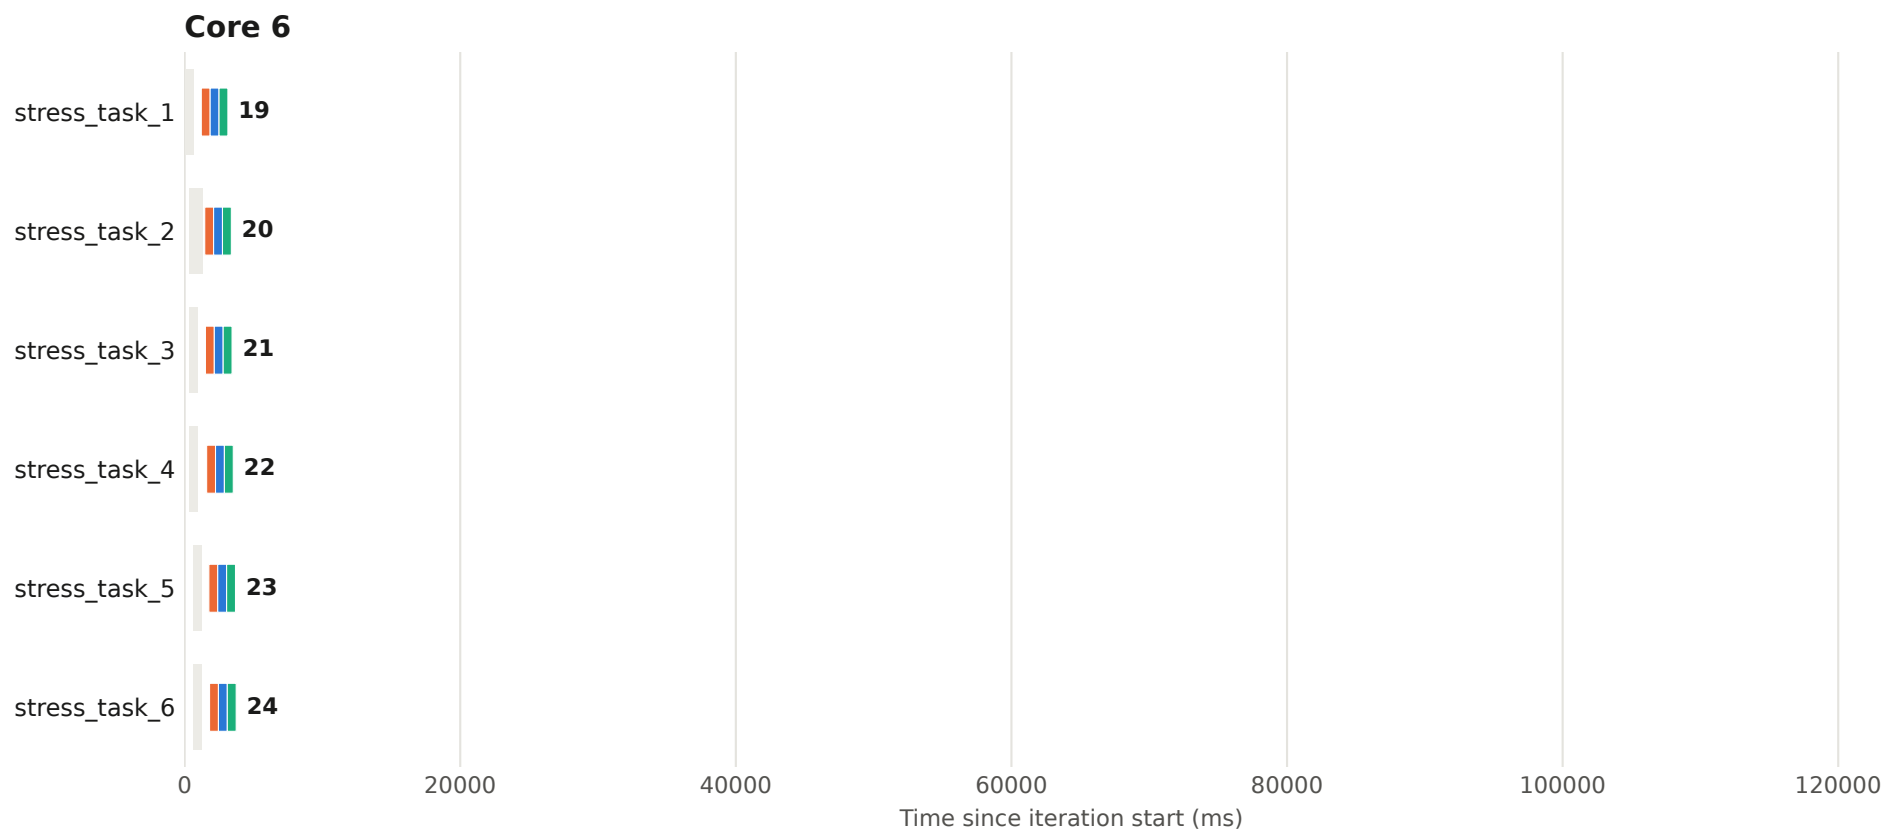


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 65 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

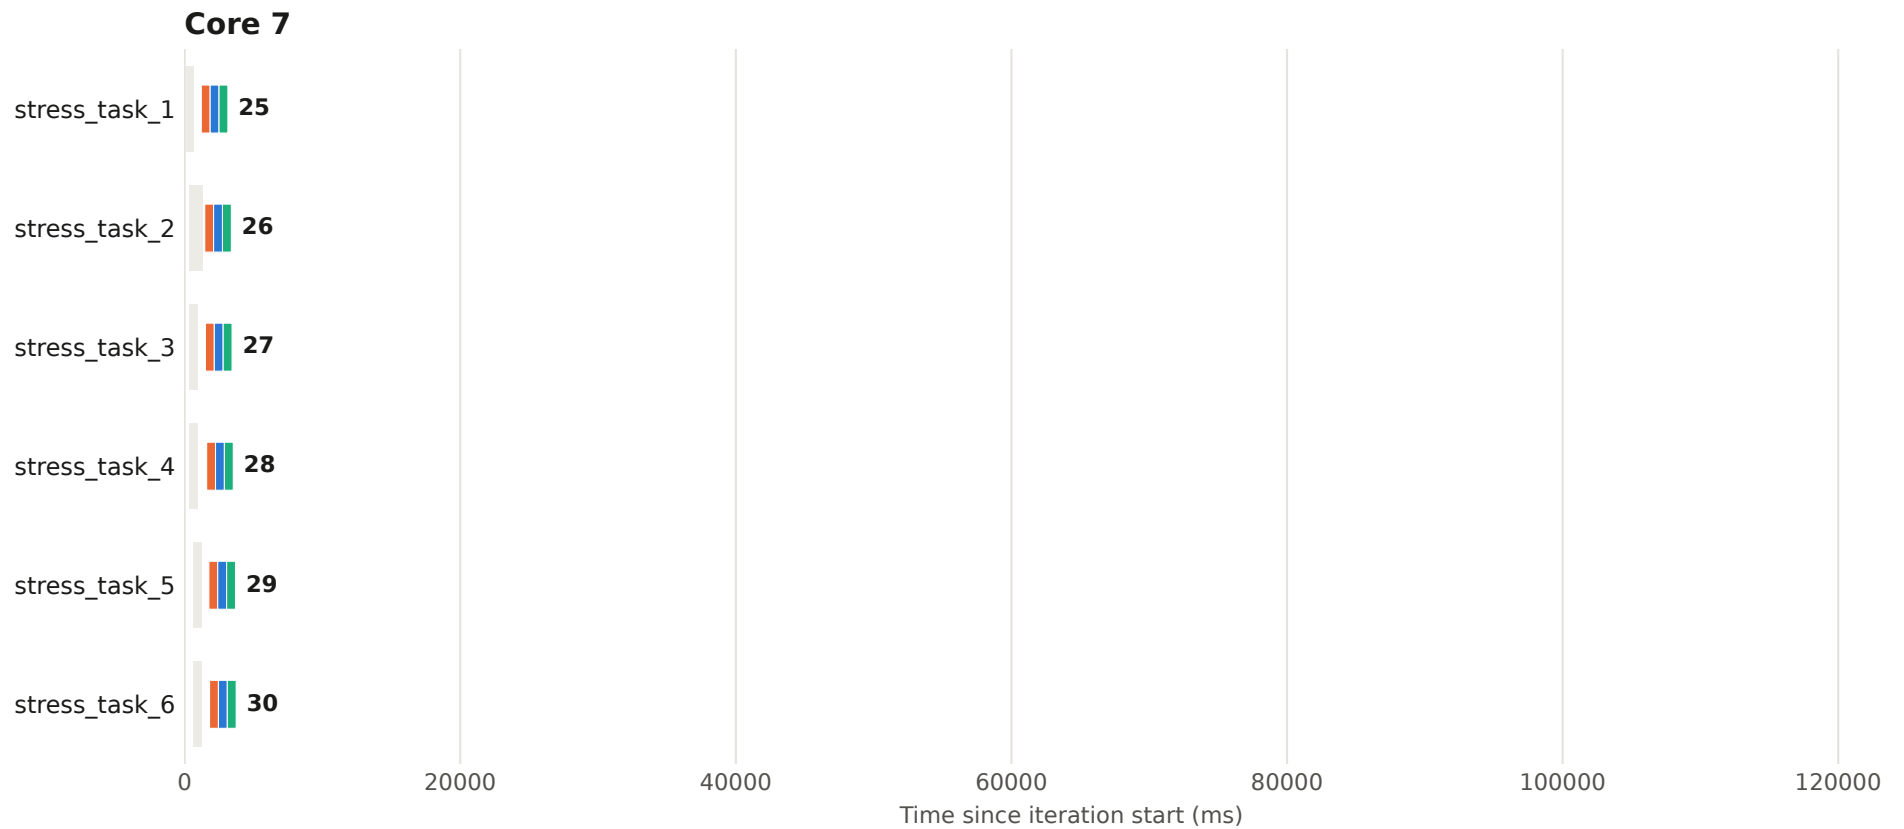


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 66 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

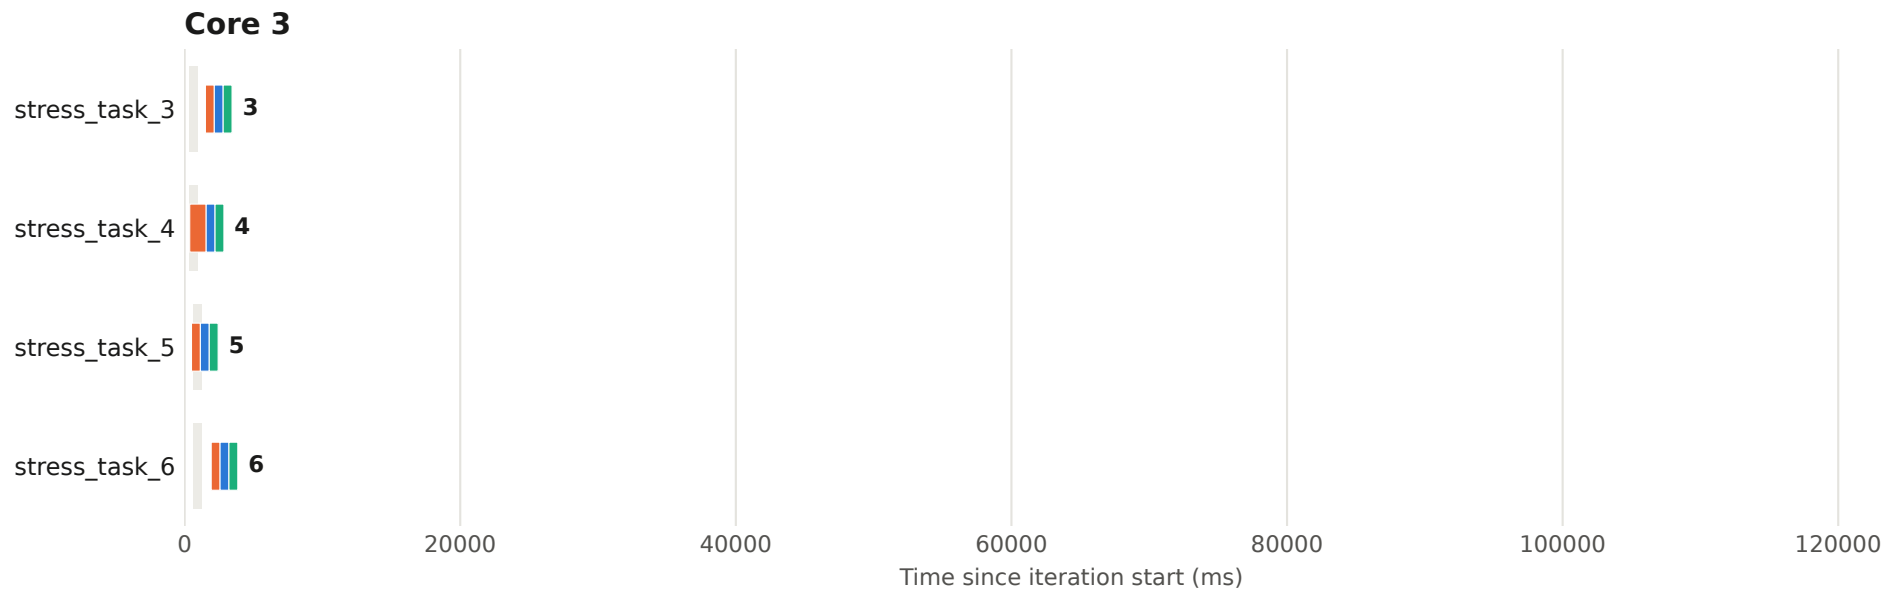

Execution plan - iteration 66 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

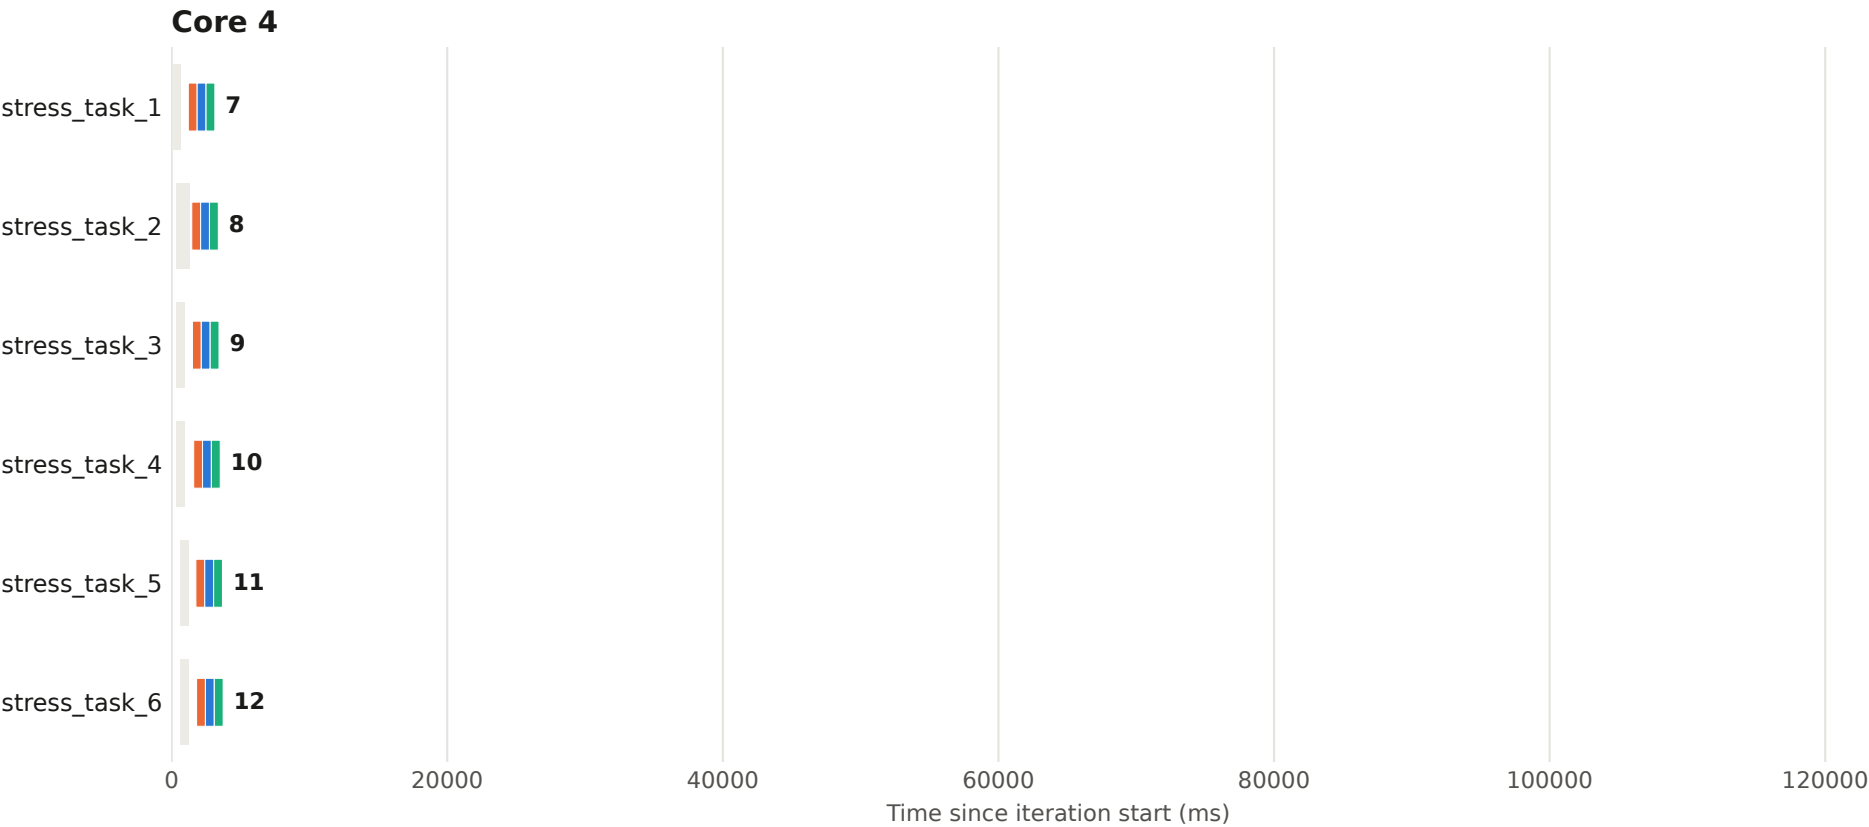


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 66 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

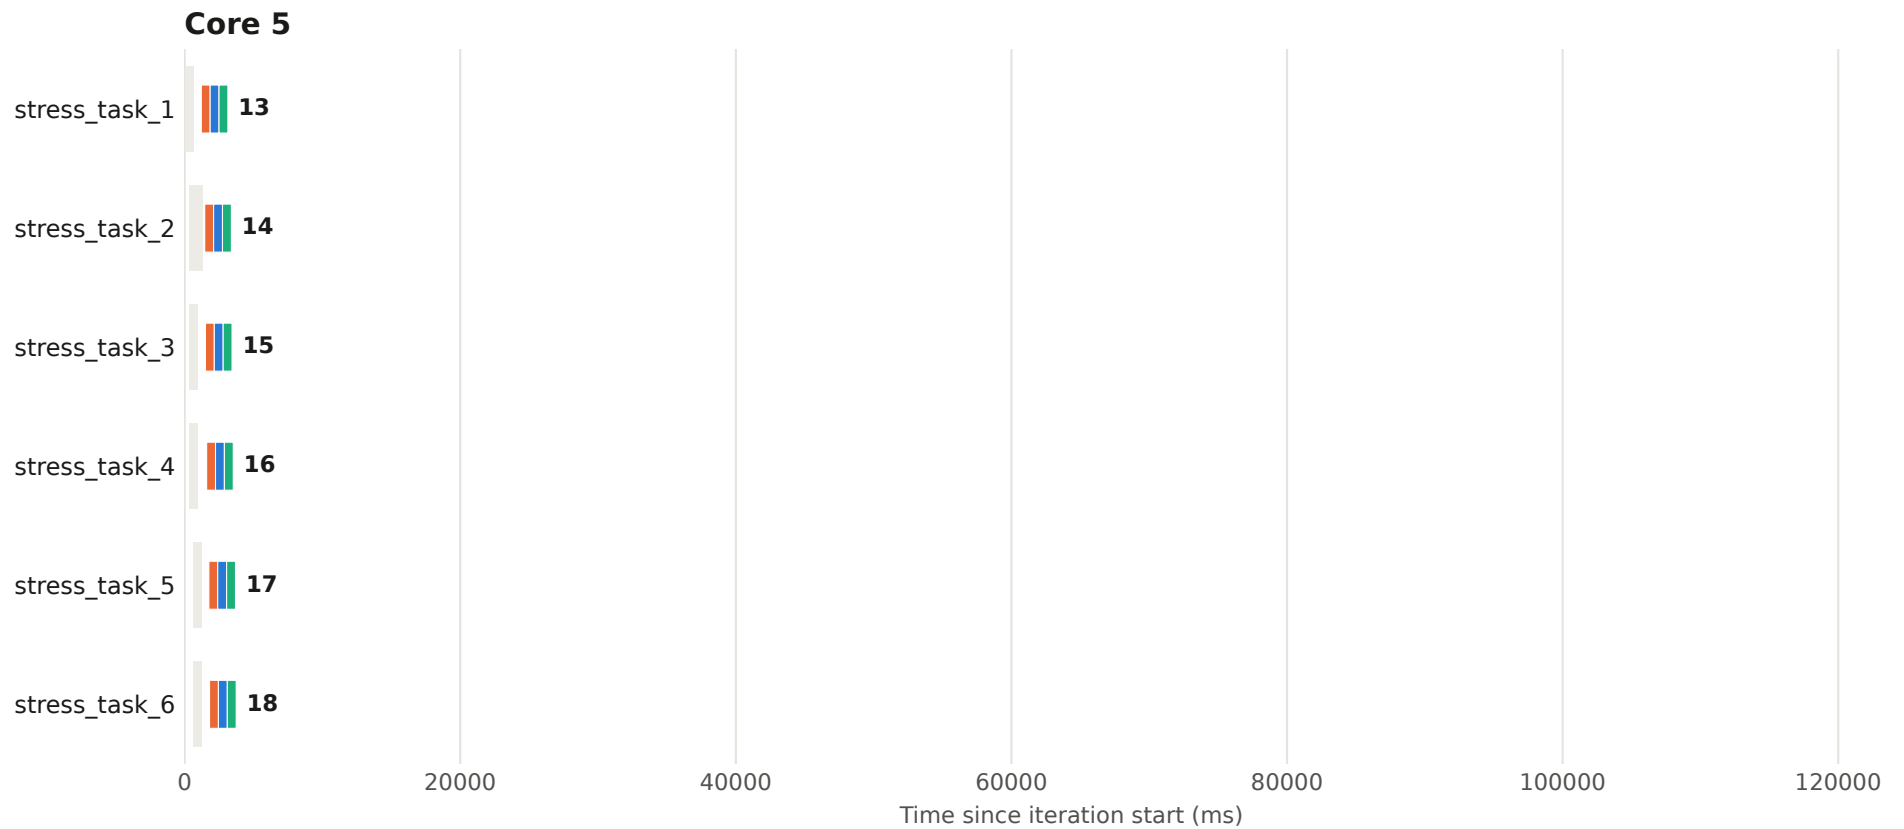


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 66 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

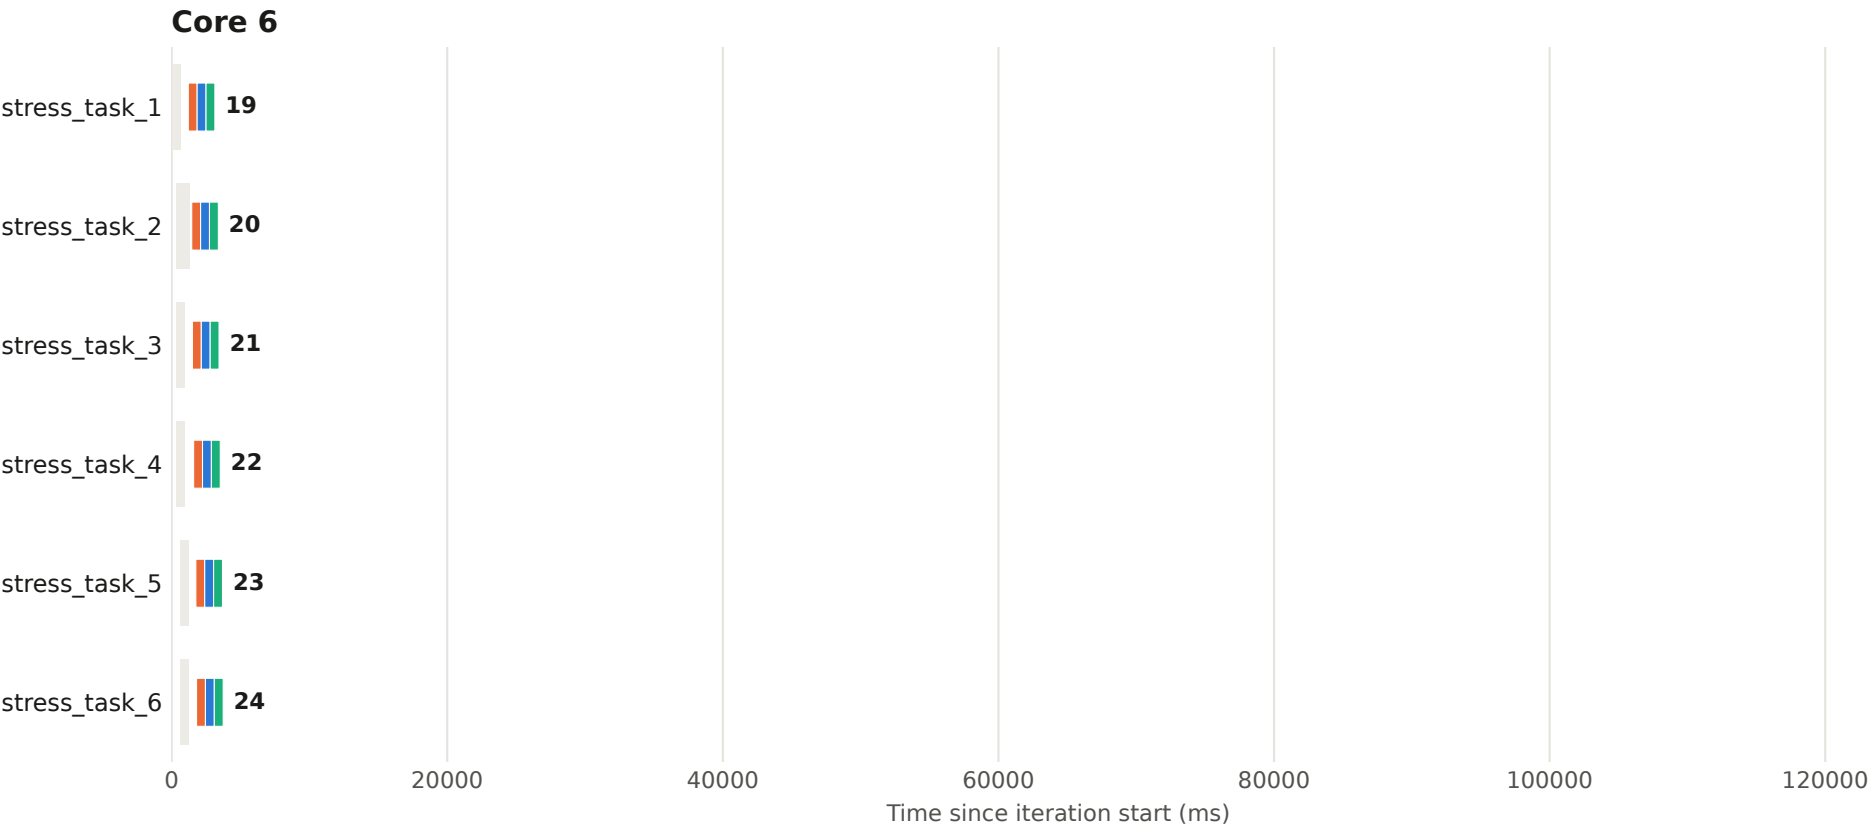


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 66 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

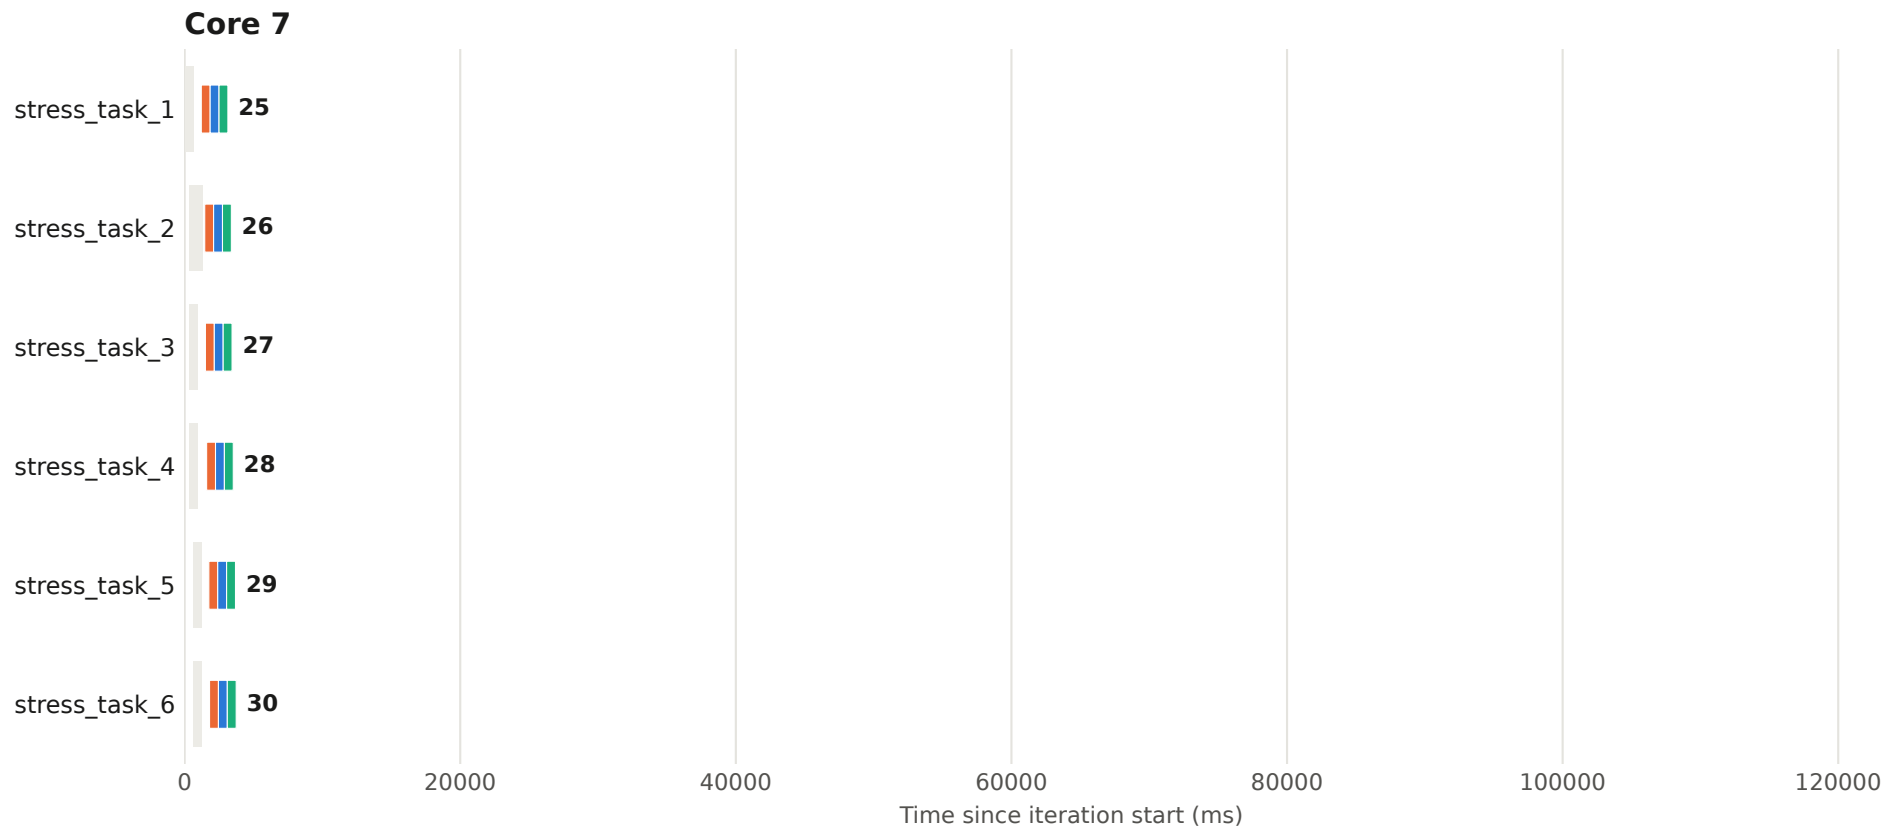


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 67 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

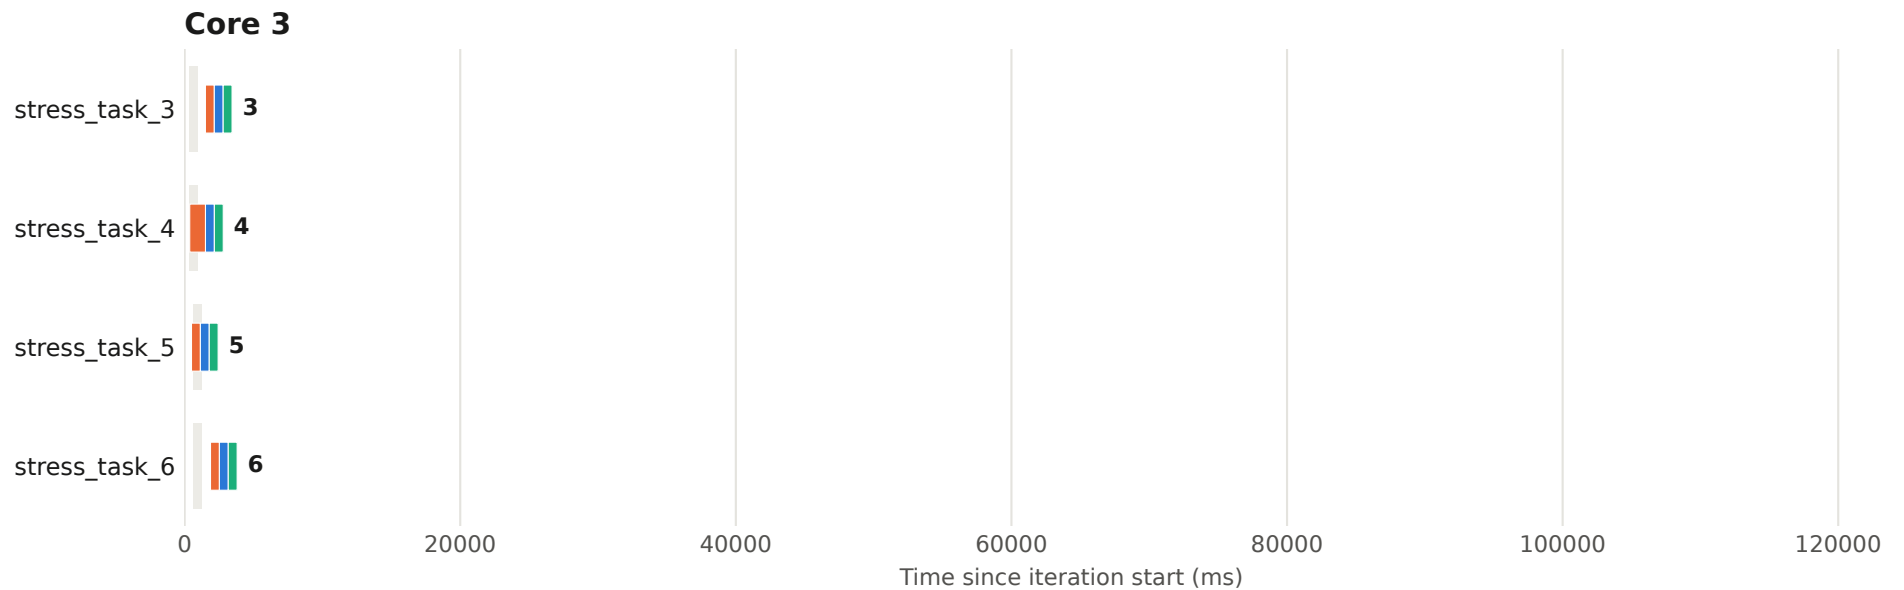

Execution plan - iteration 67 - core 4

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

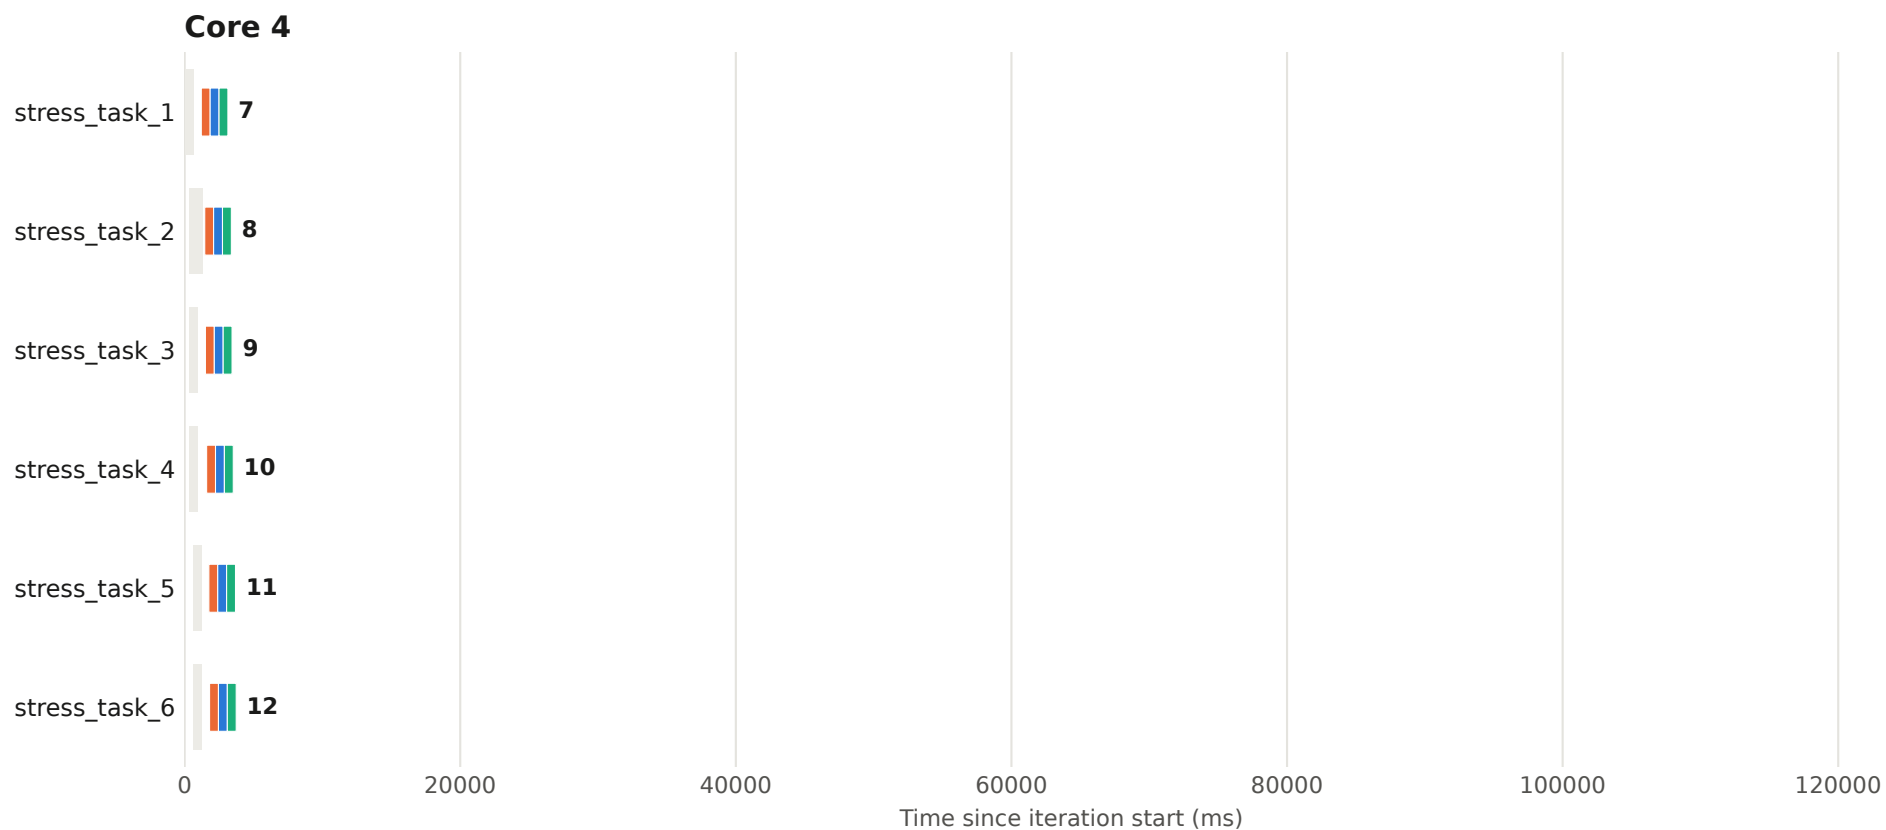

Execution plan - iteration 67 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

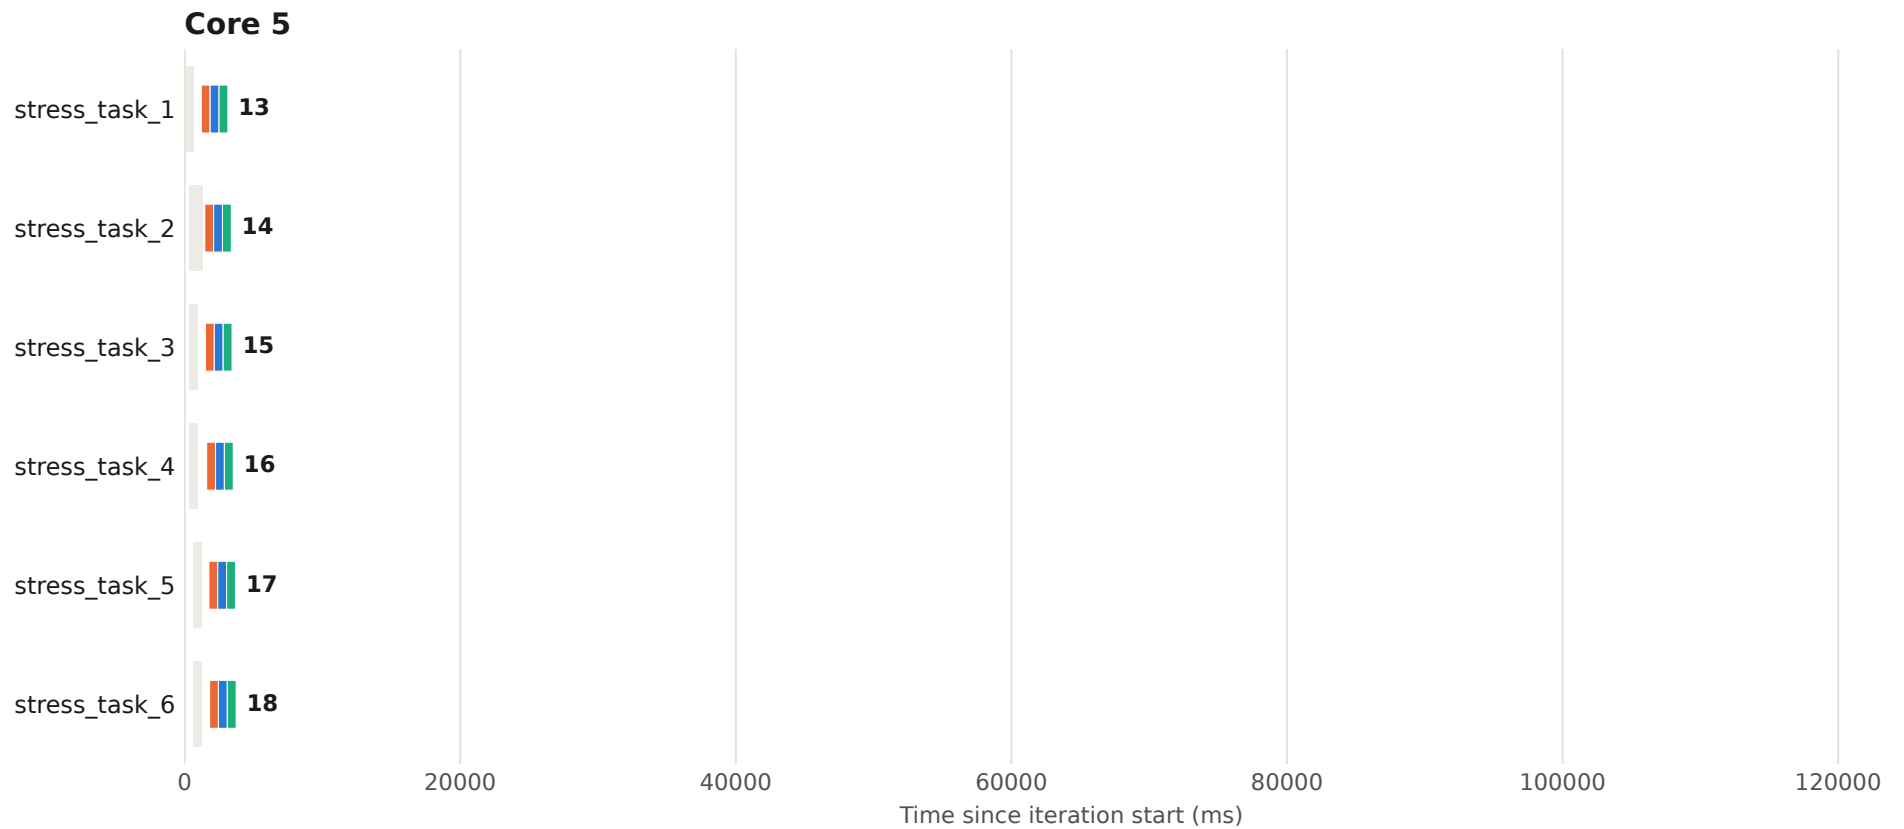


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 67 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

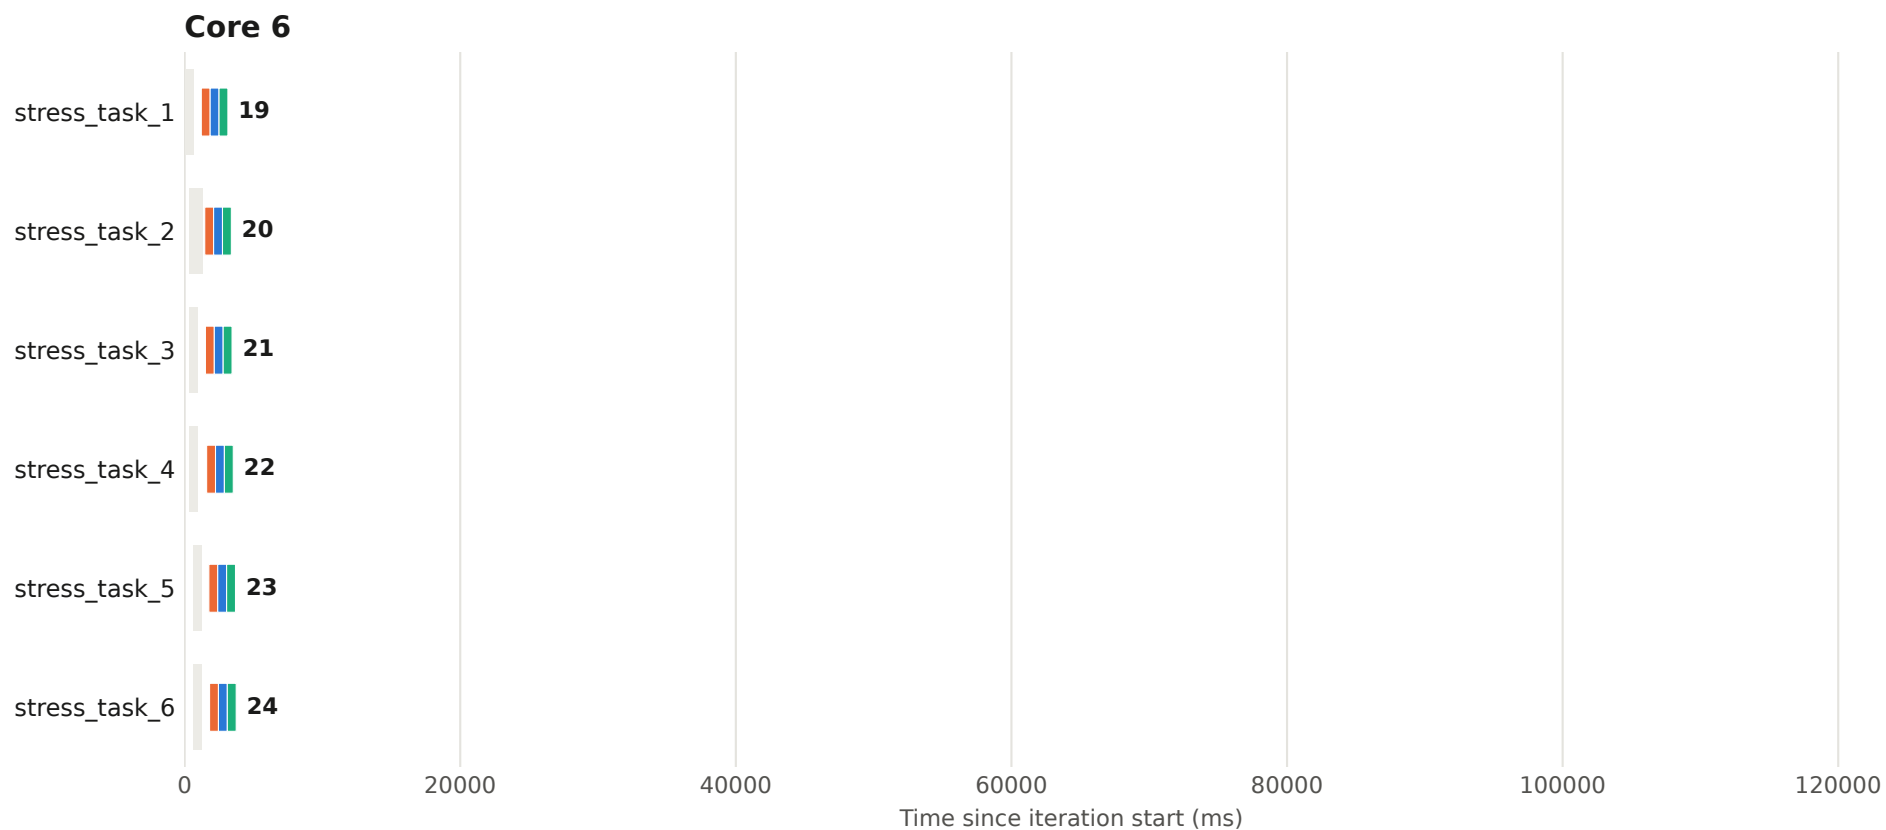


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 67 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

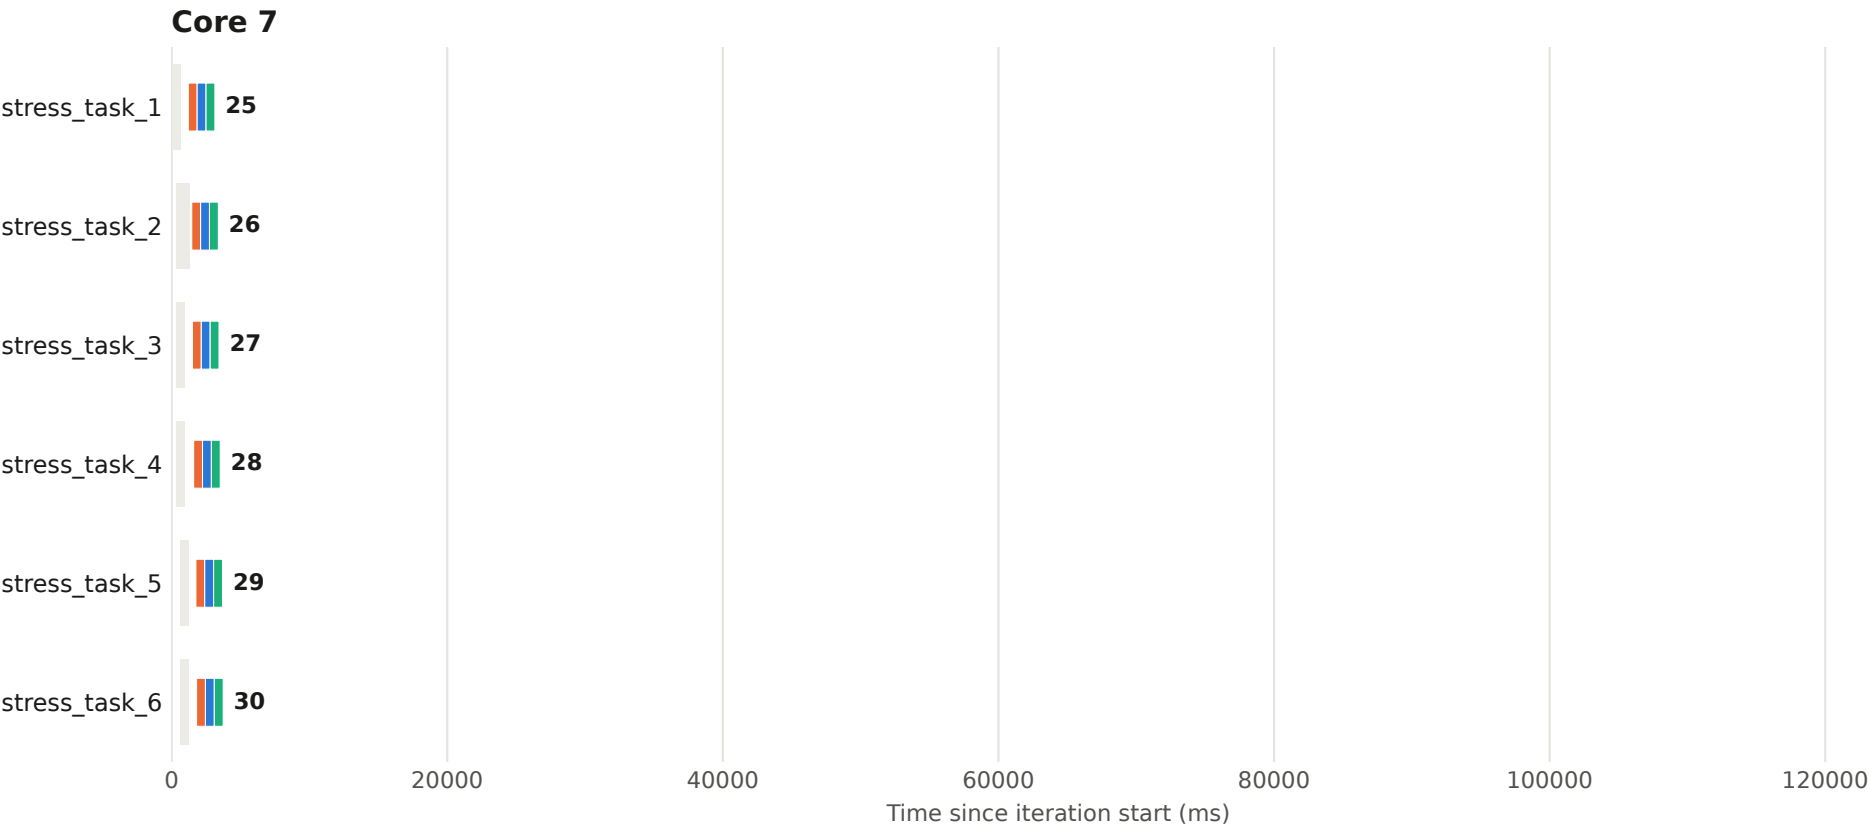


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 68 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

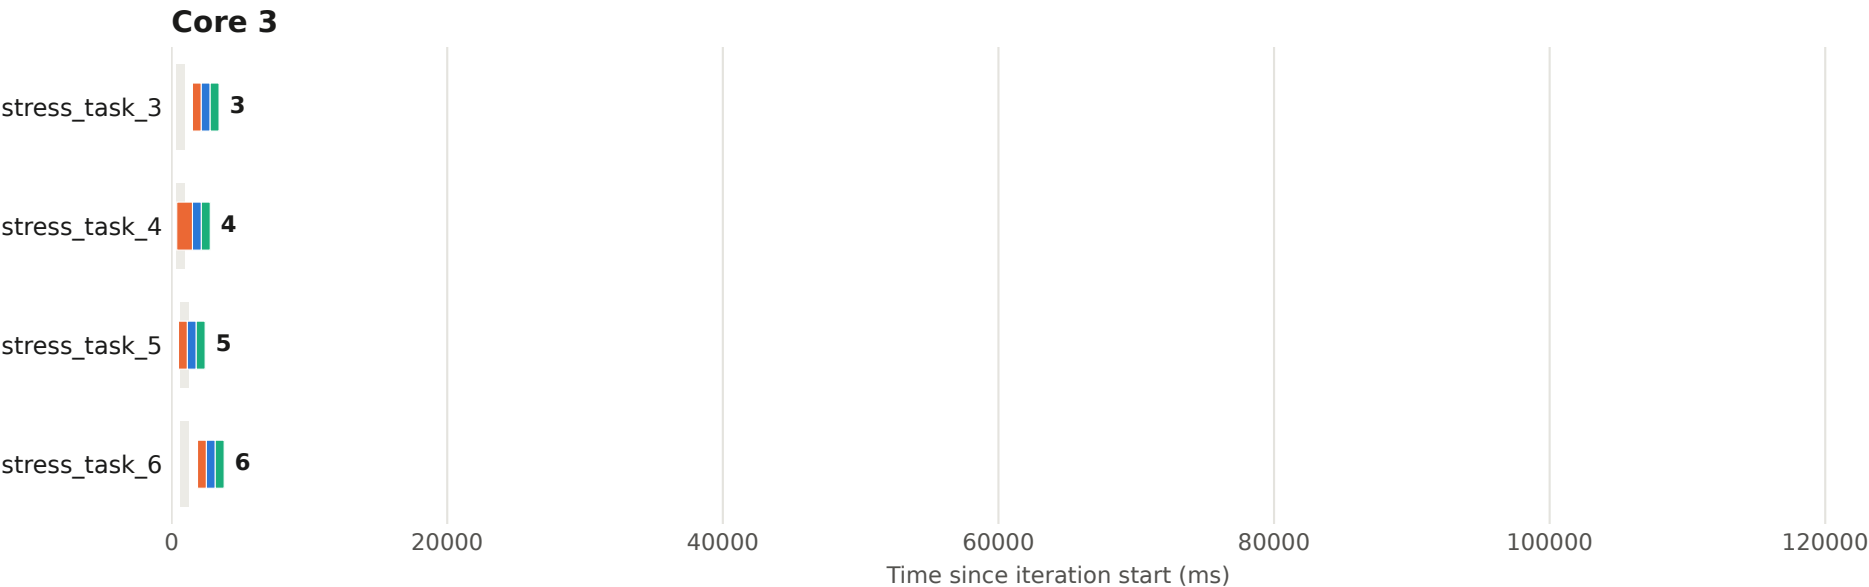


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 68 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

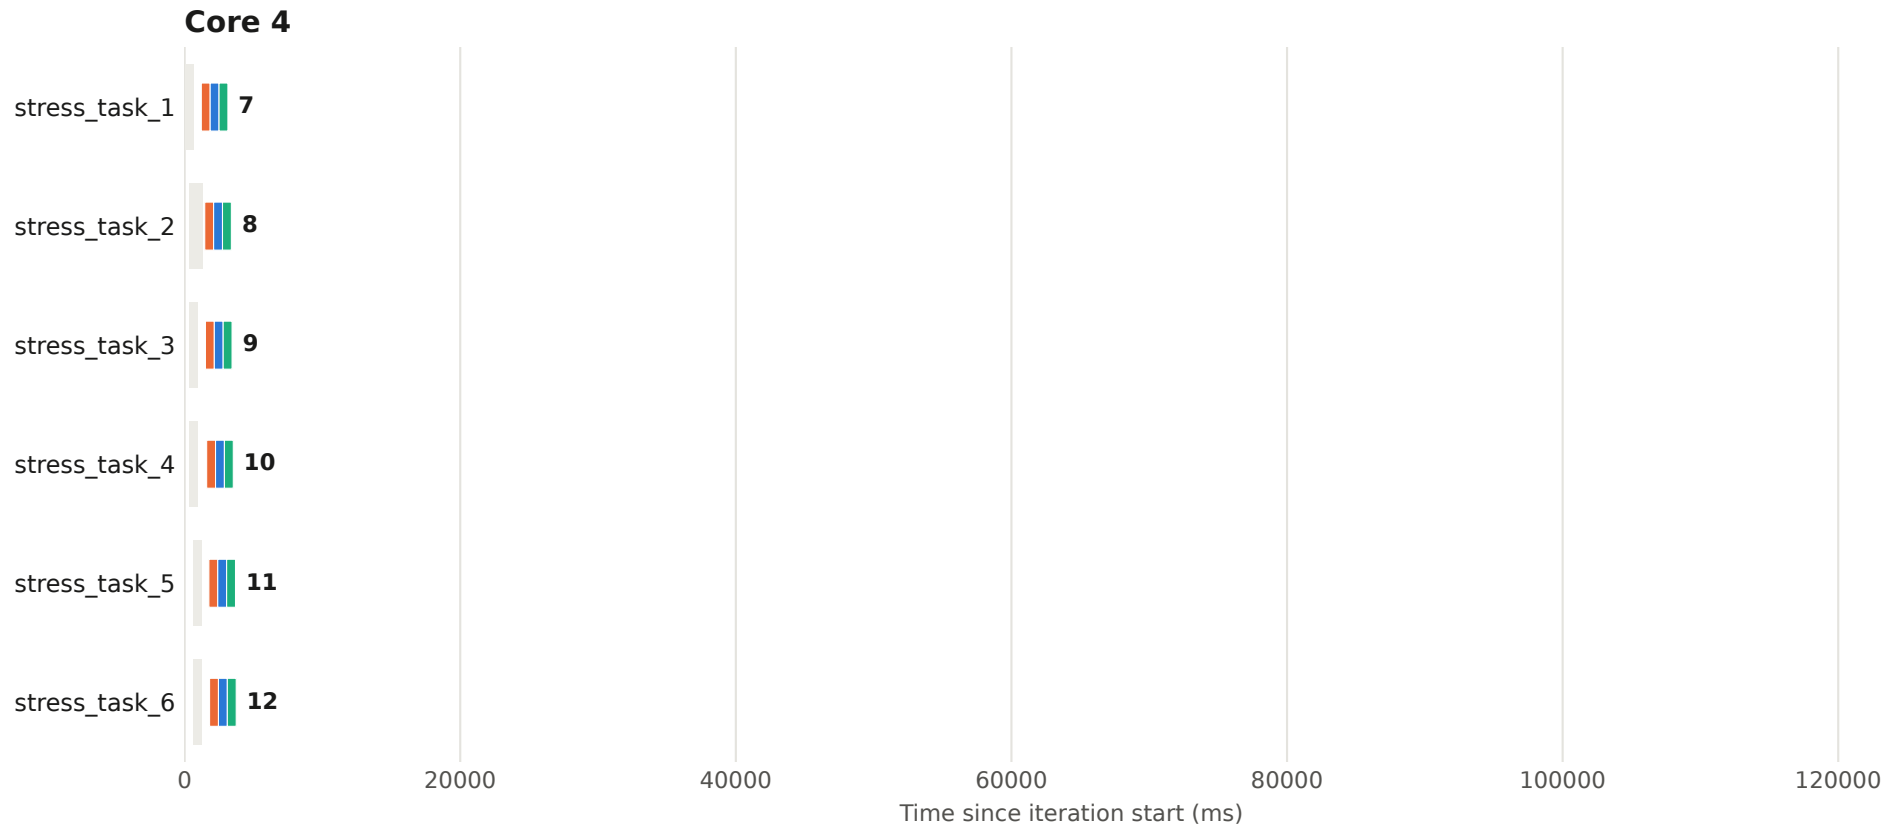


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 68 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

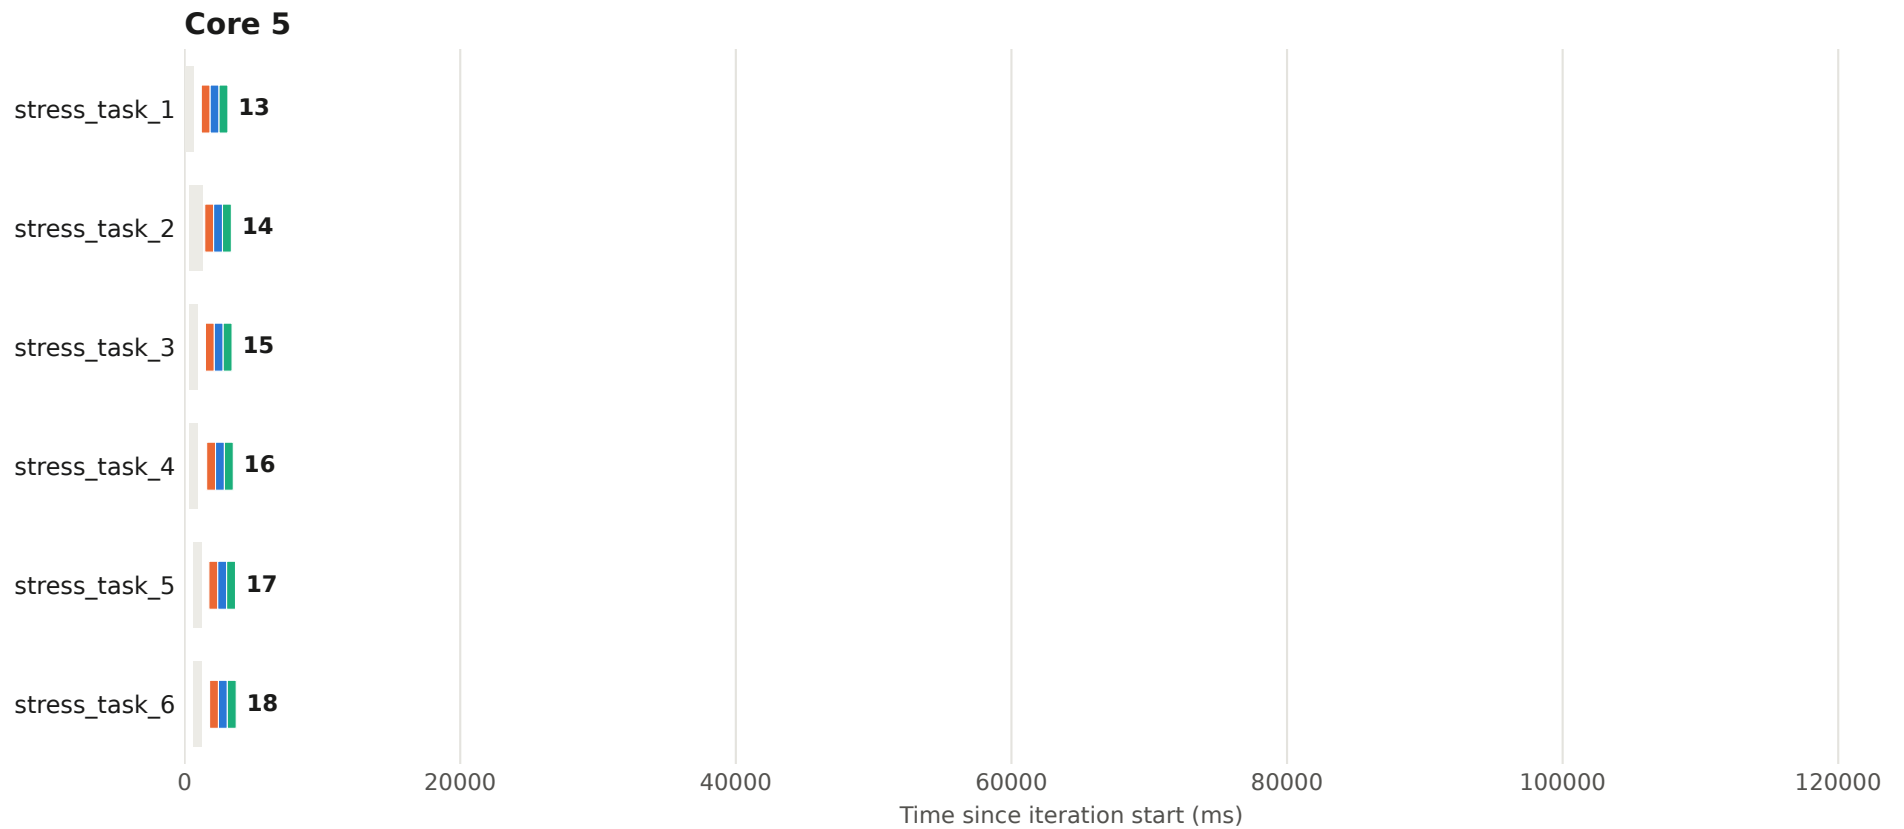


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 68 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

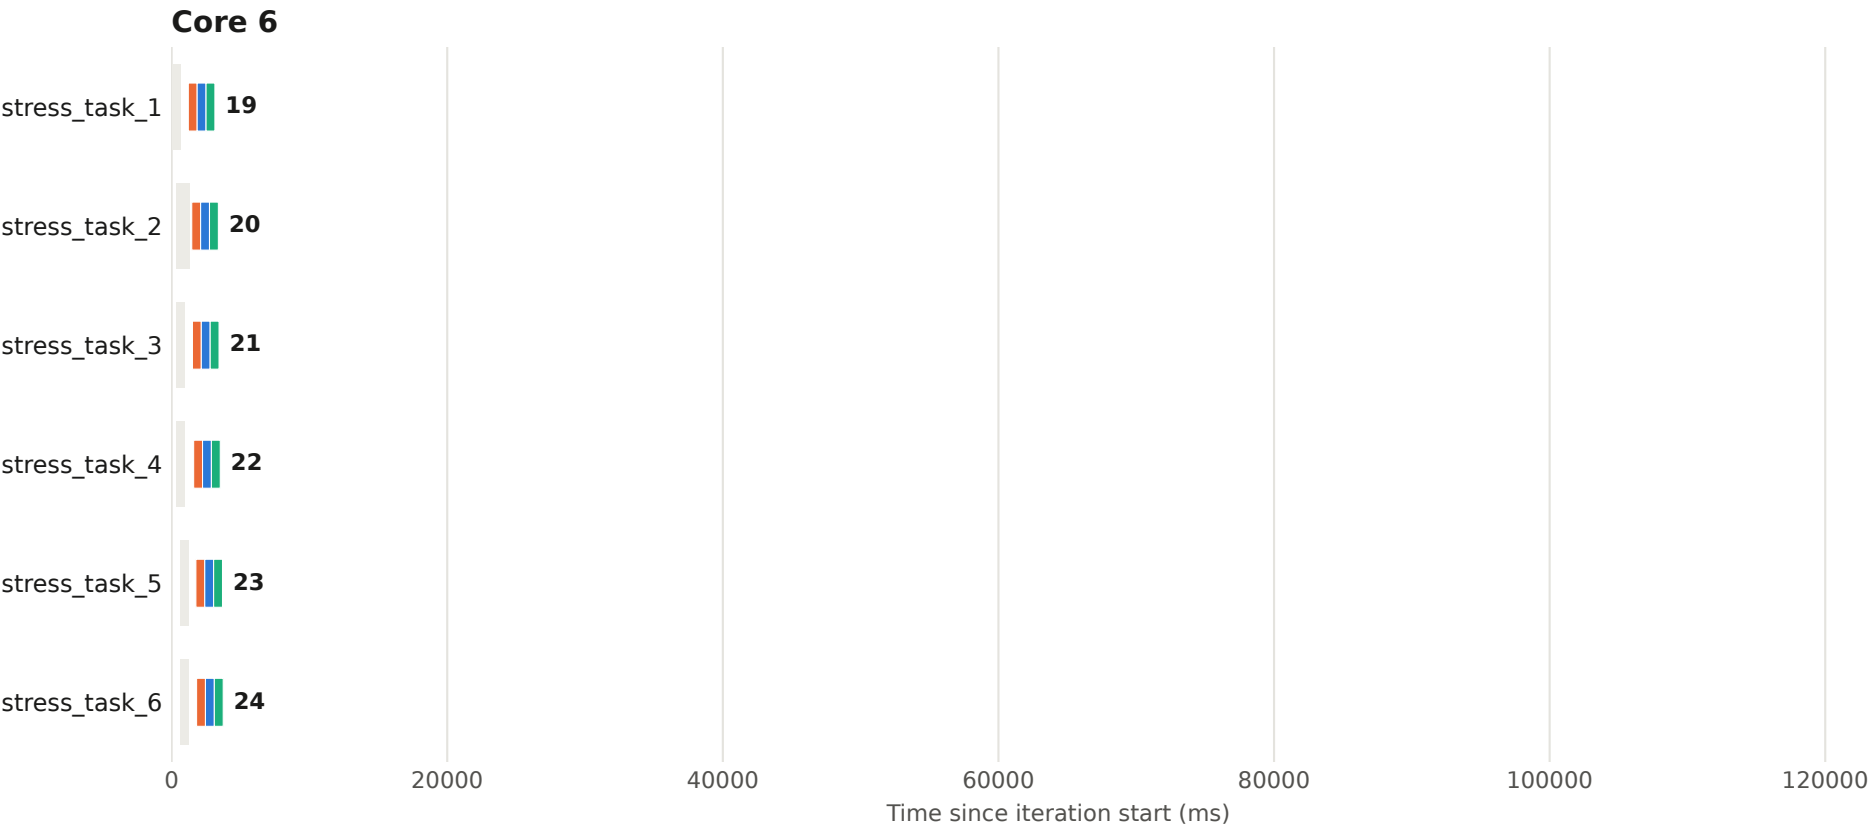


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 68 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

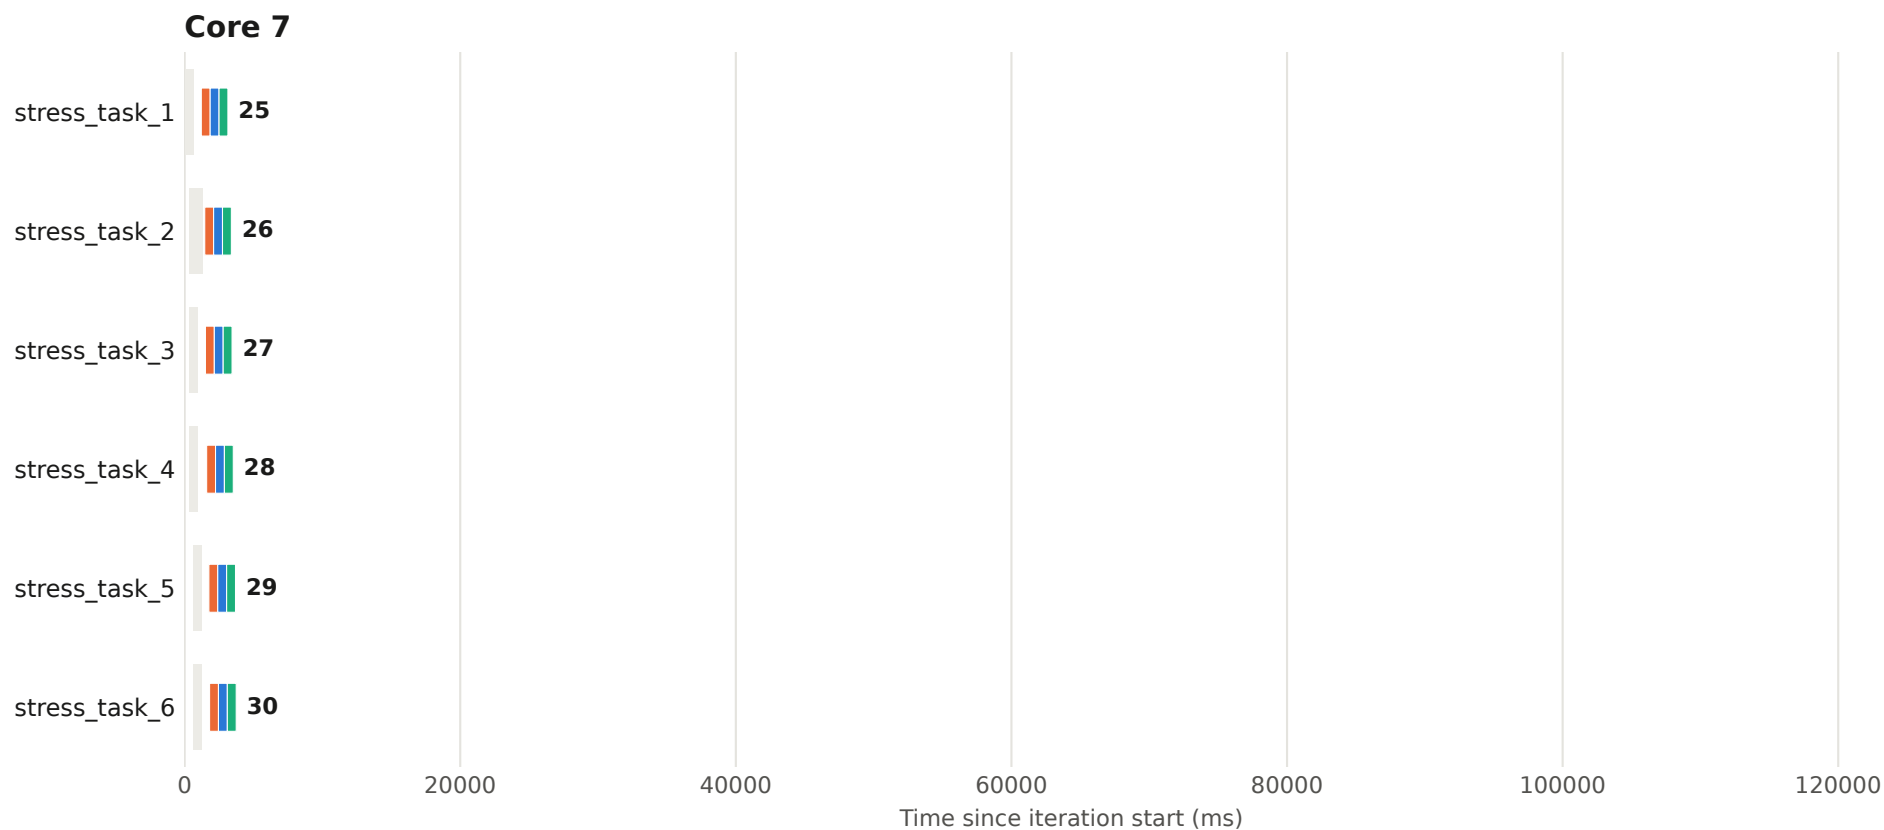


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 69 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

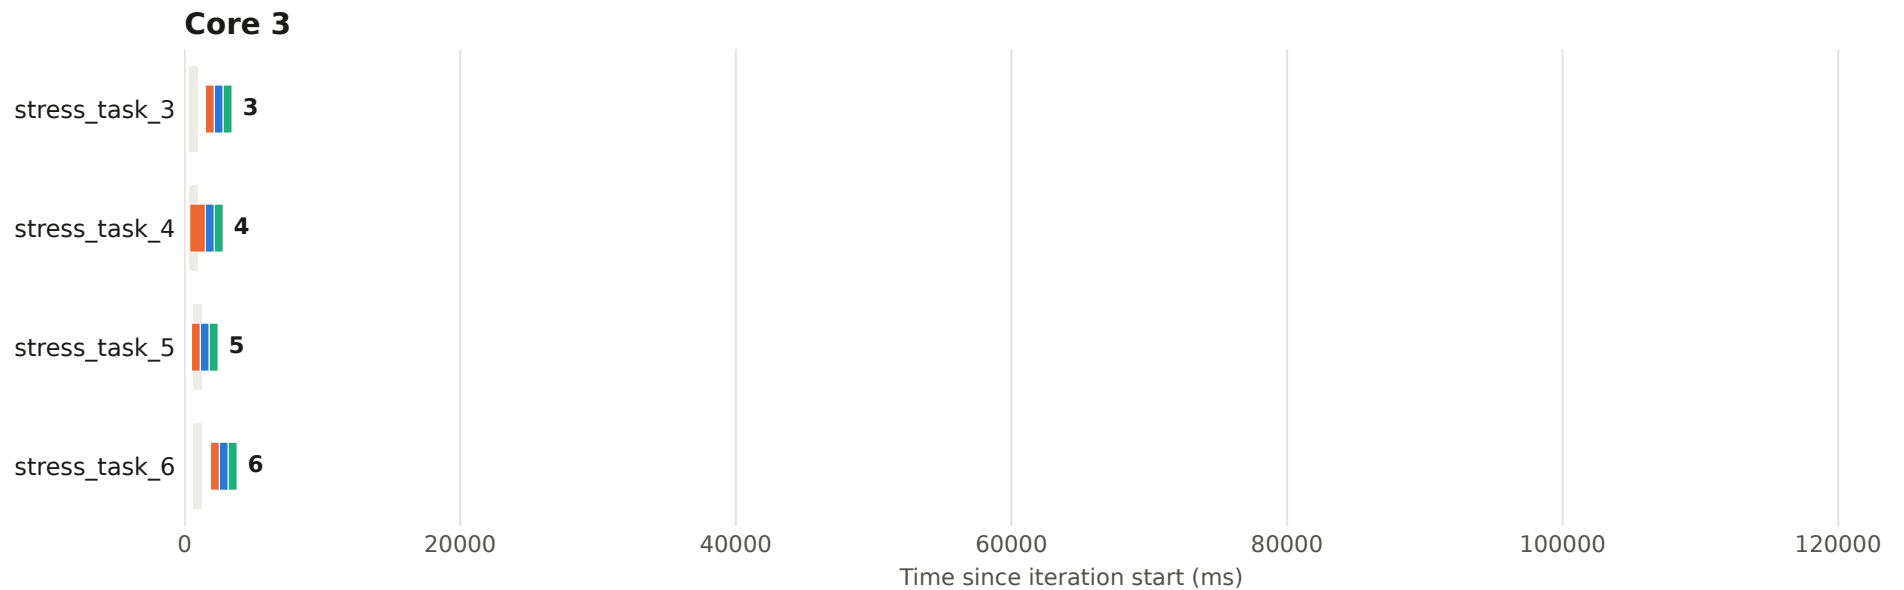

Execution plan - iteration 69 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

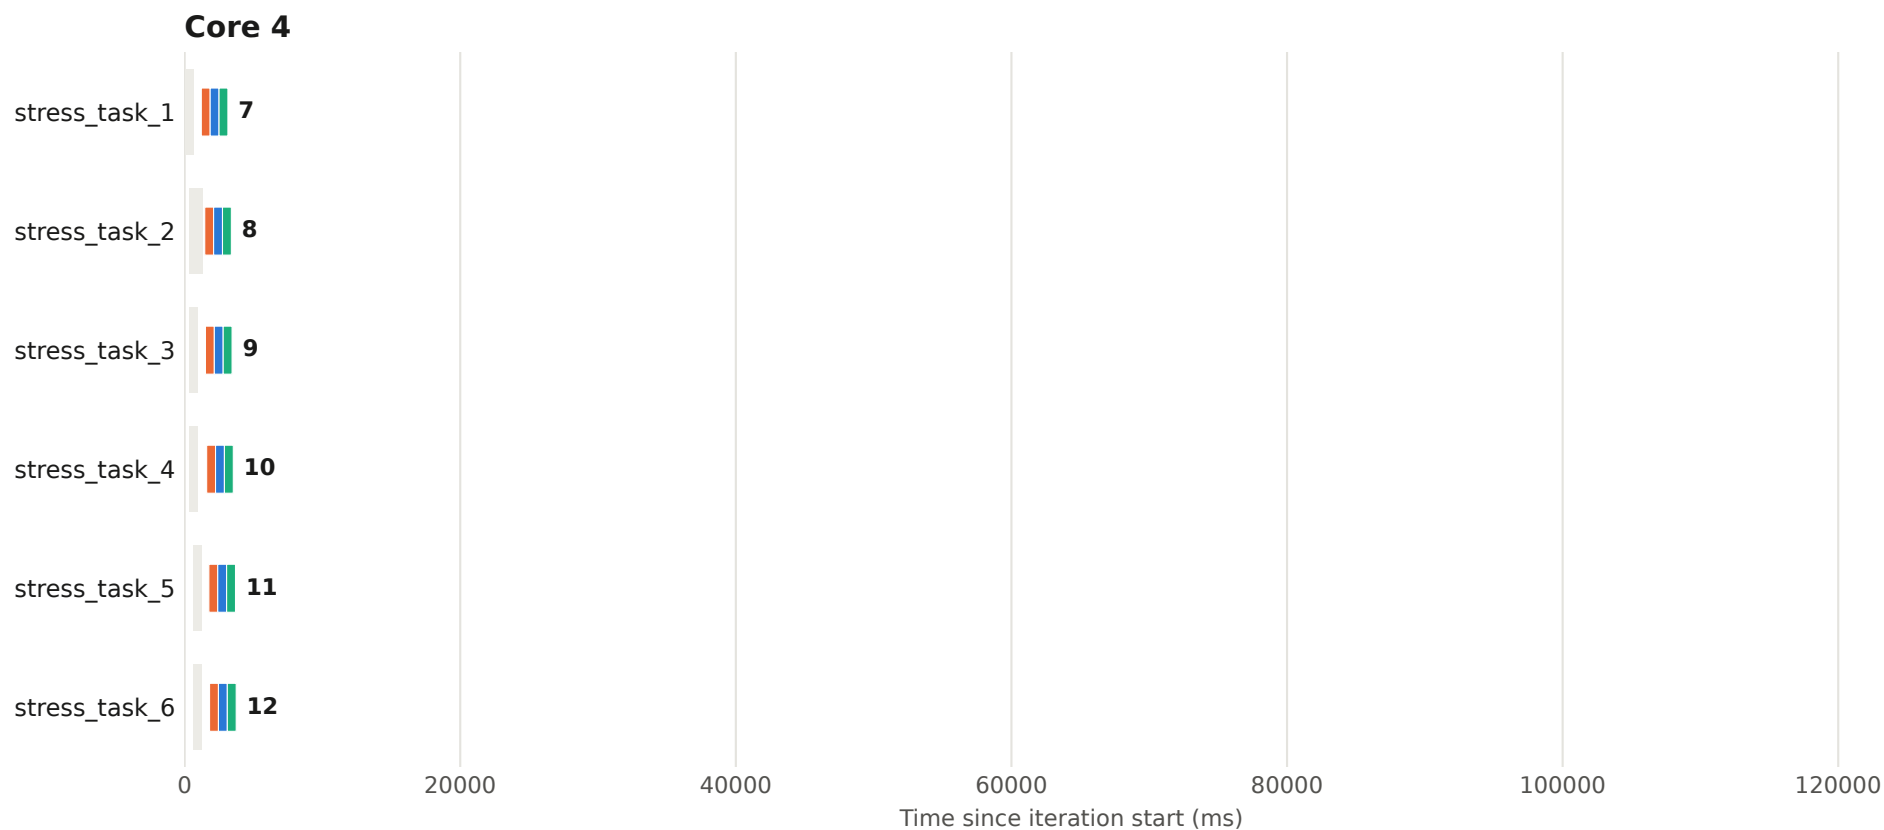


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 69 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

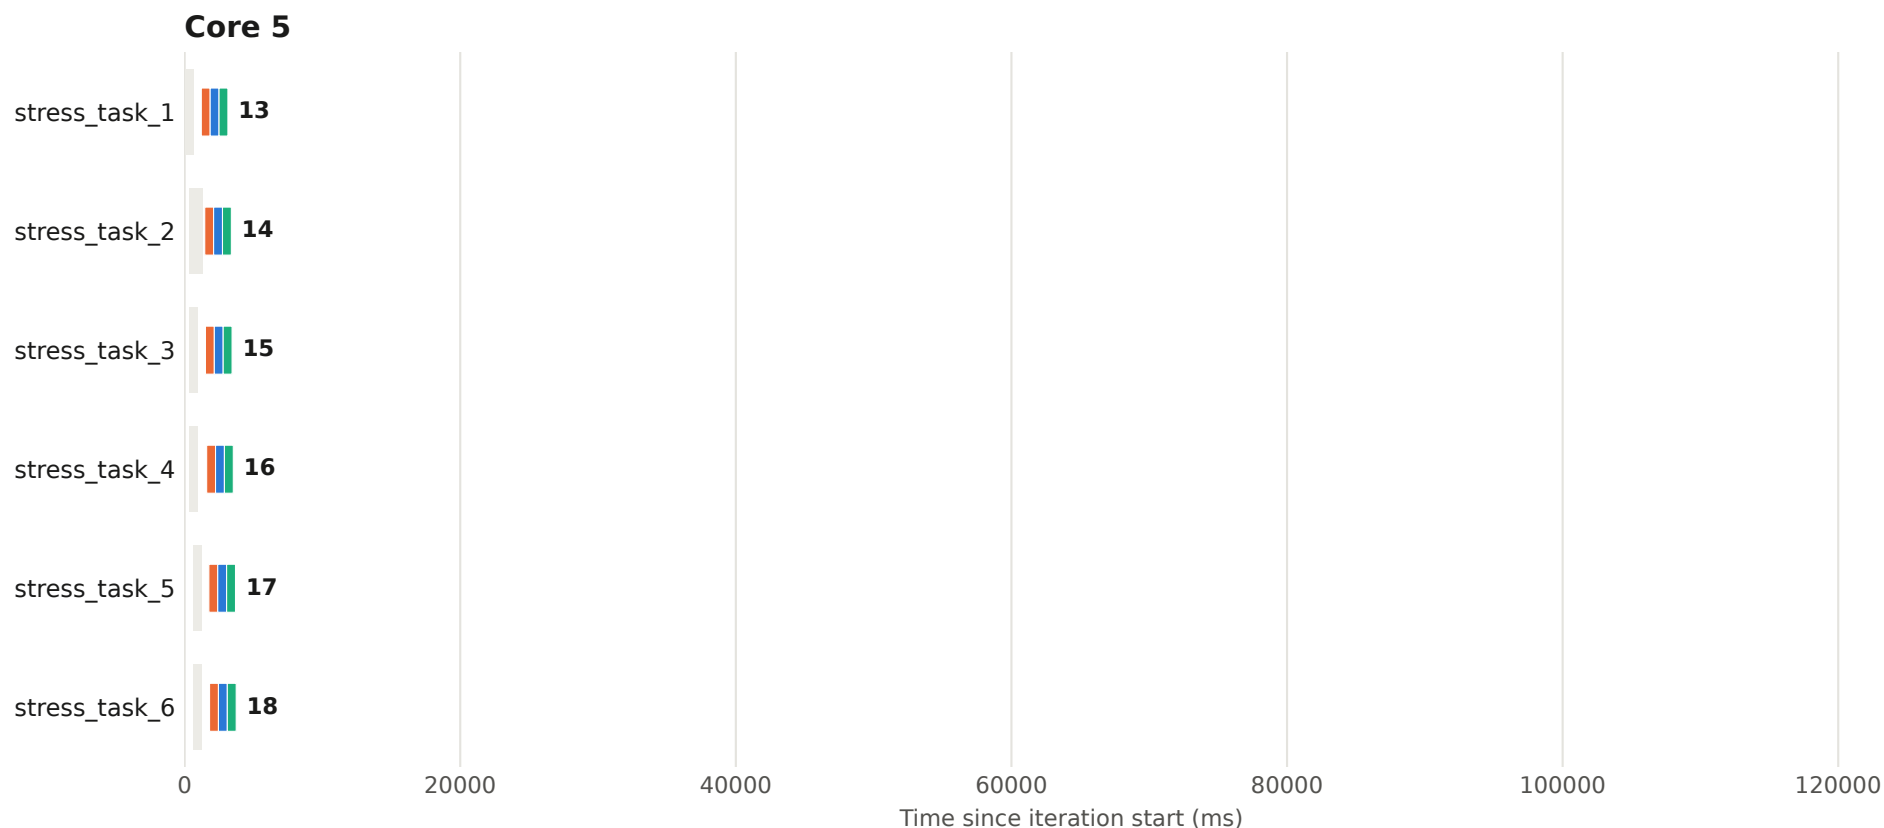


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 69 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

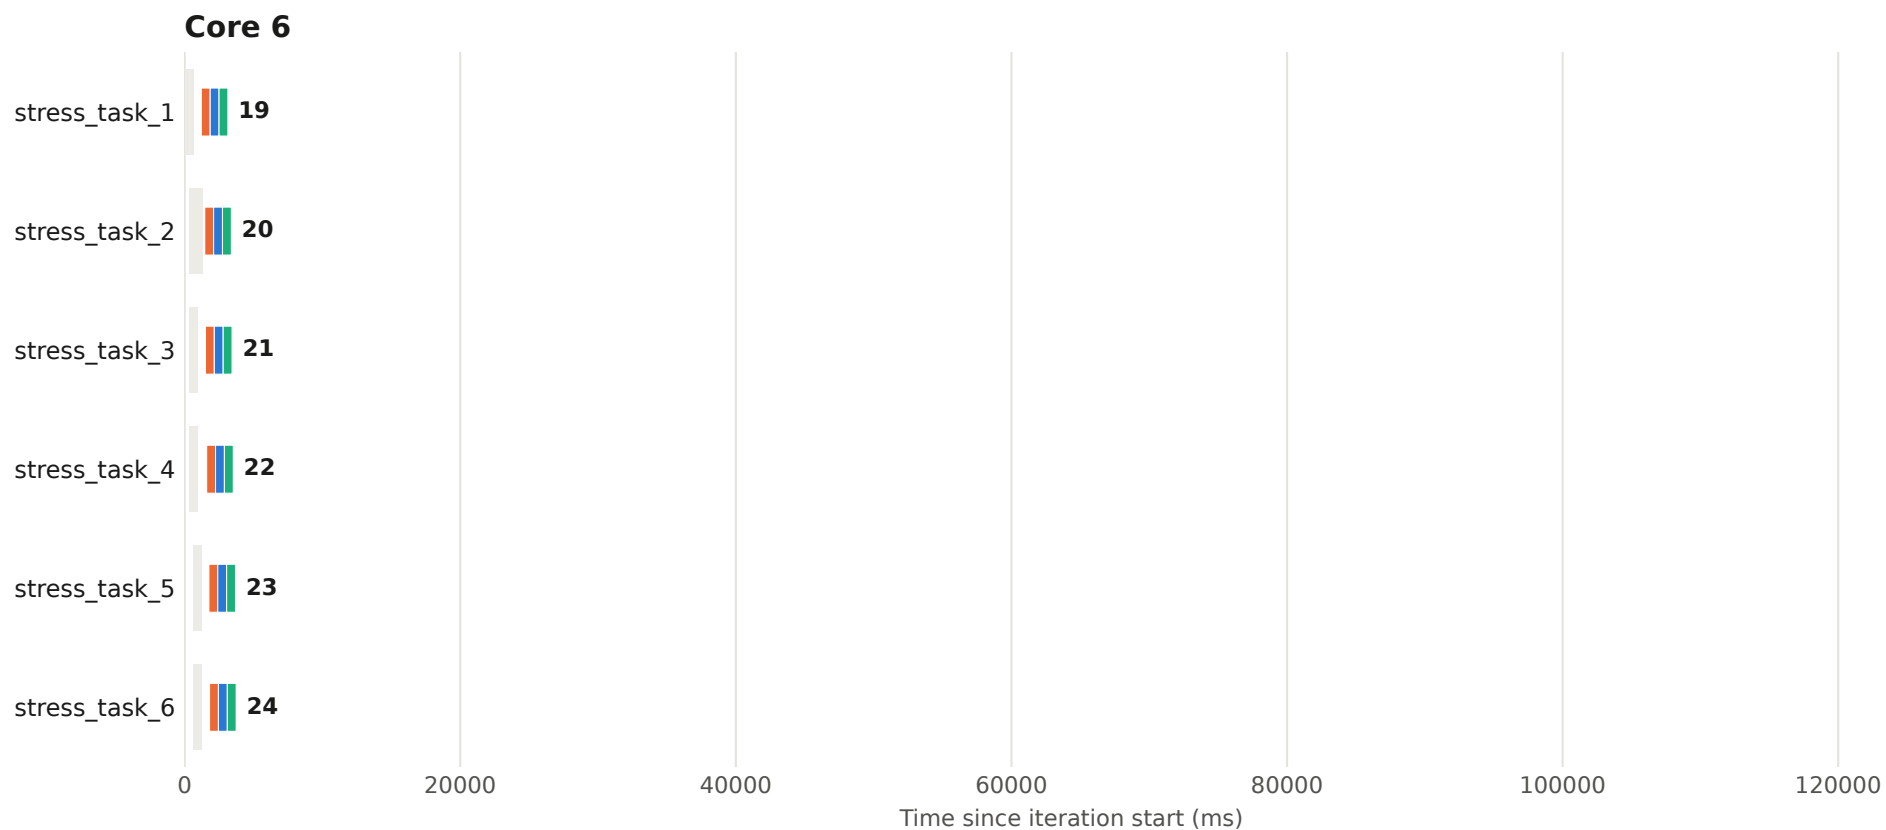


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 69 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

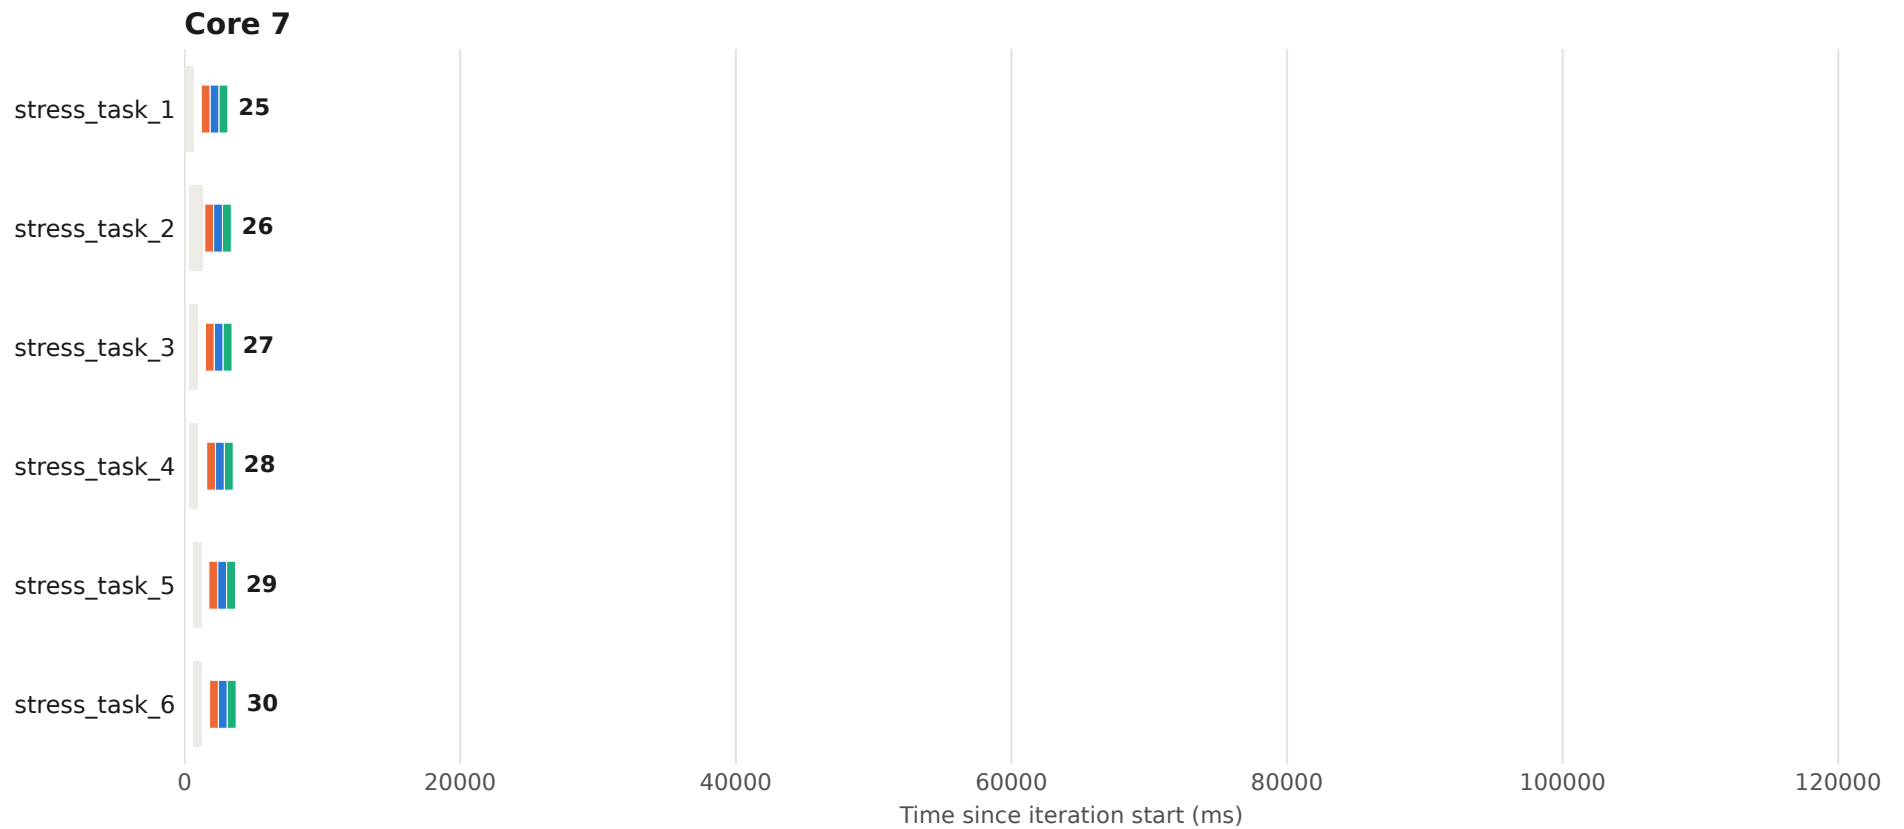


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 70 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

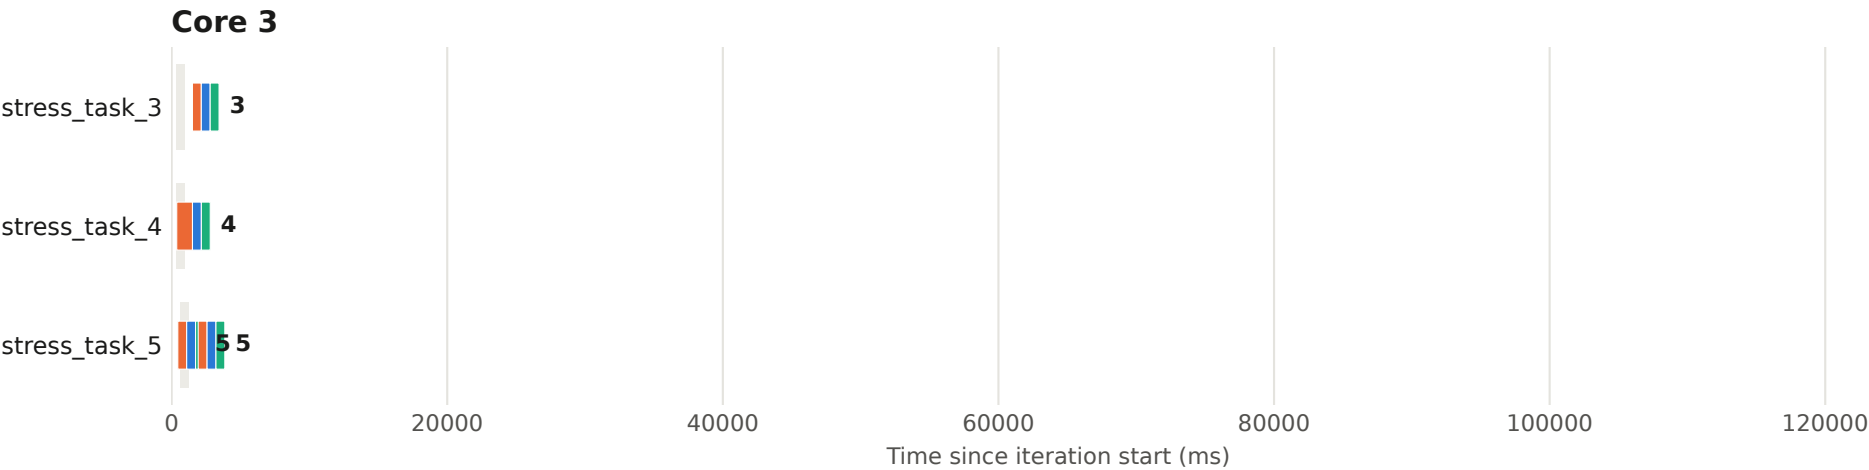


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 70 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

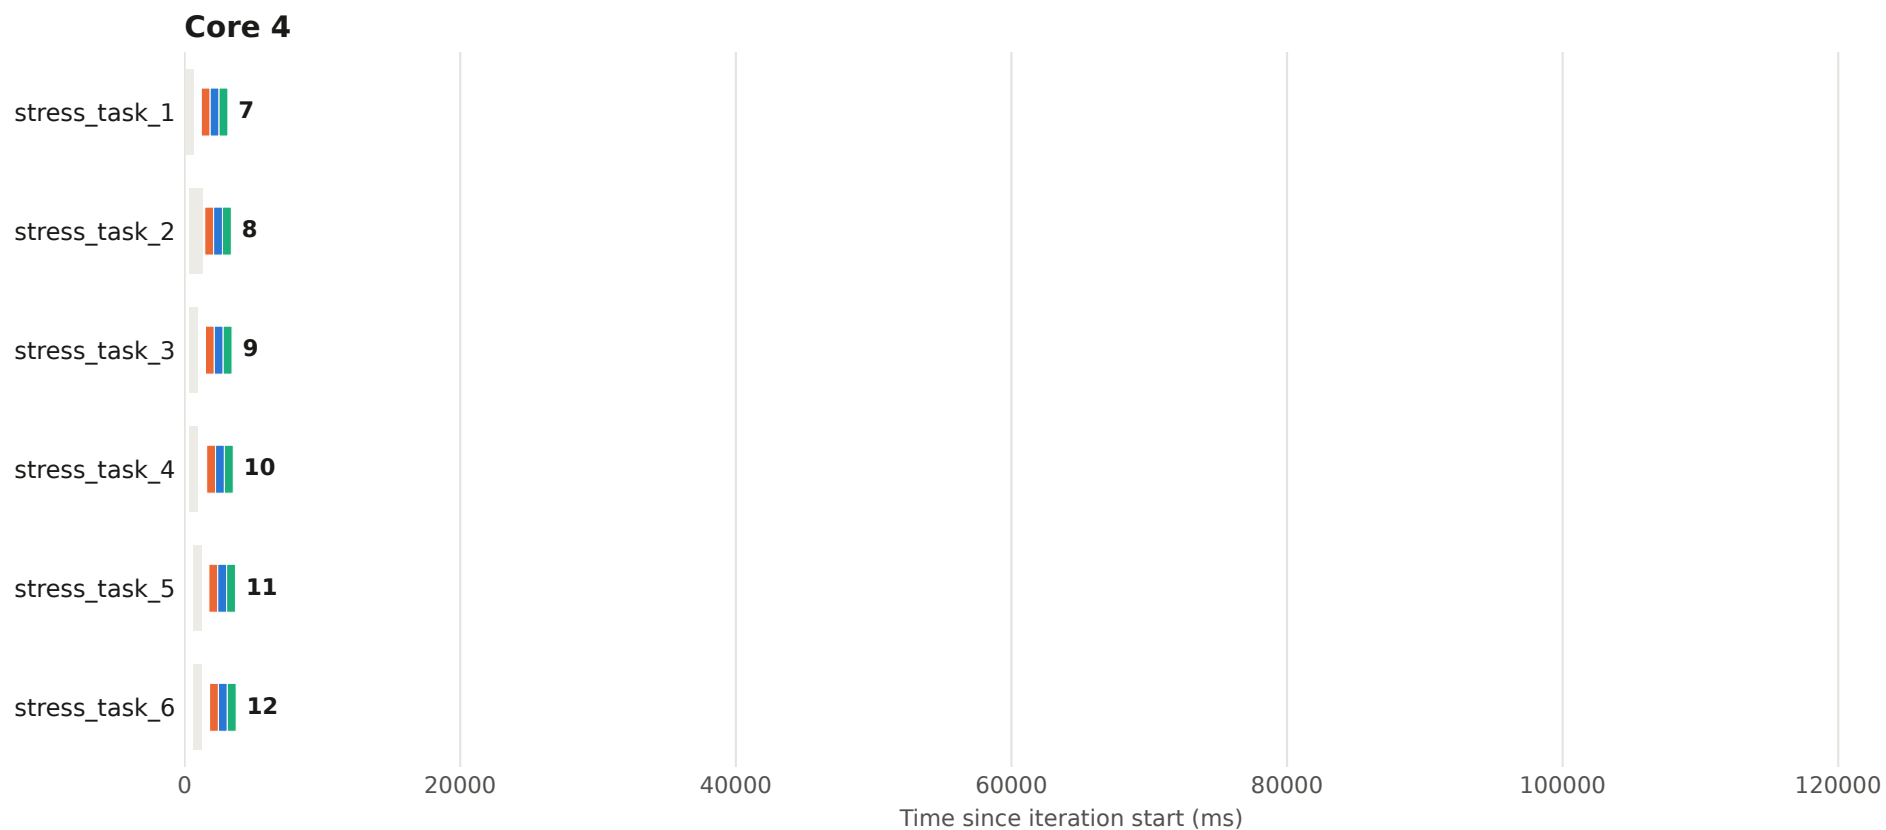


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 70 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

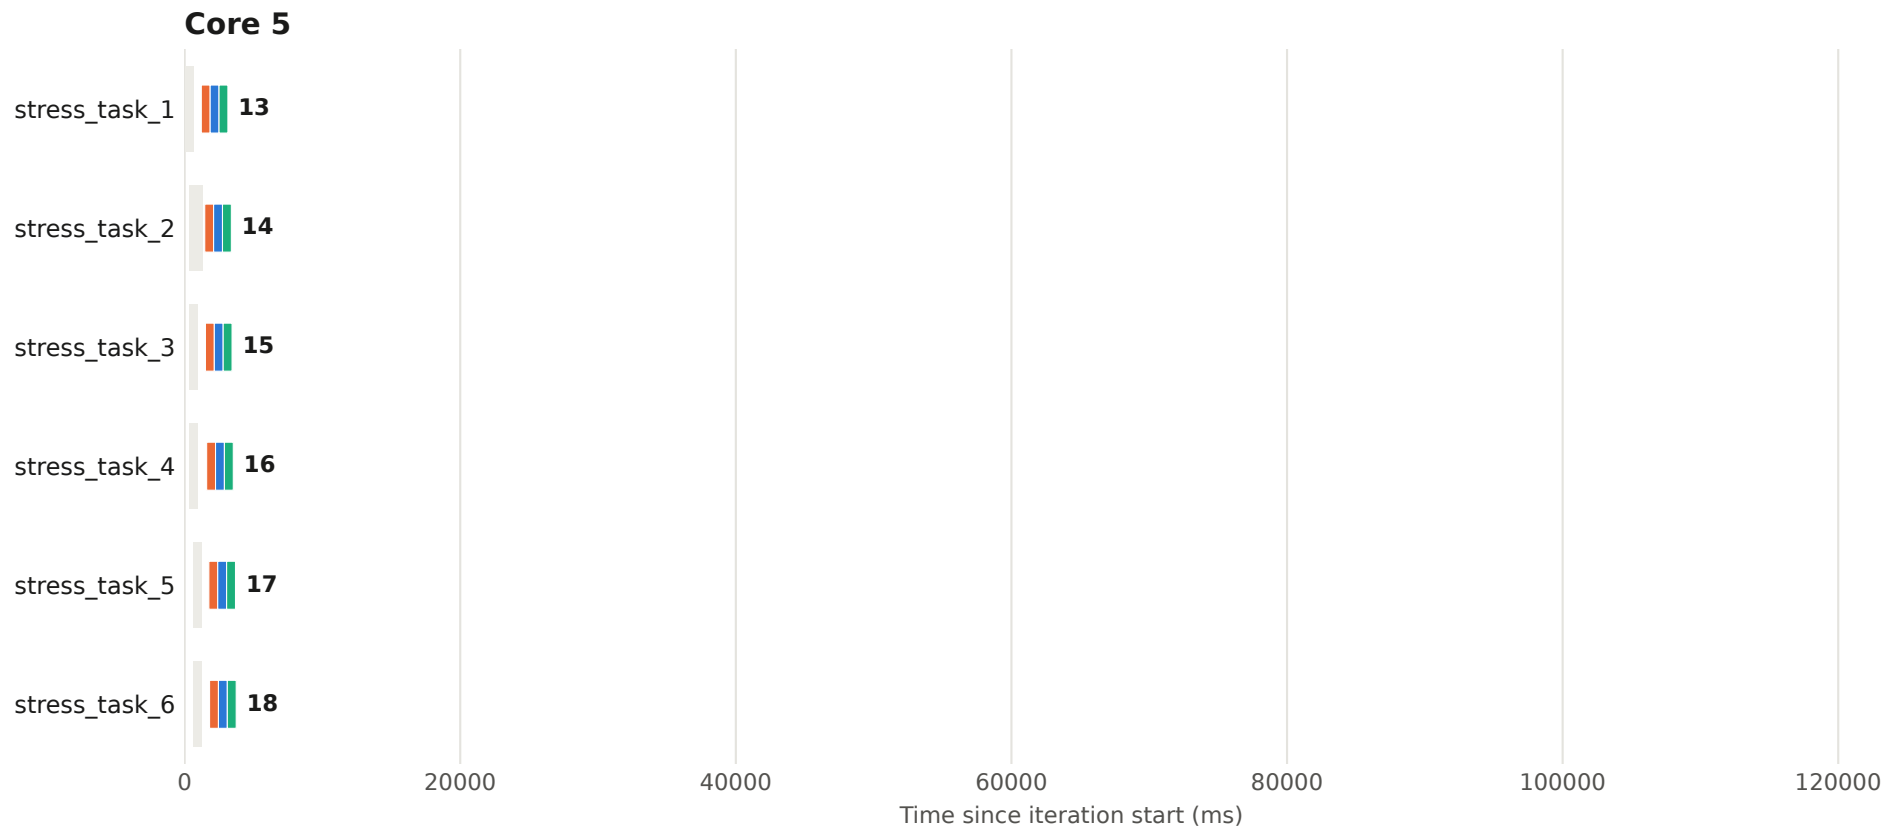


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 70 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

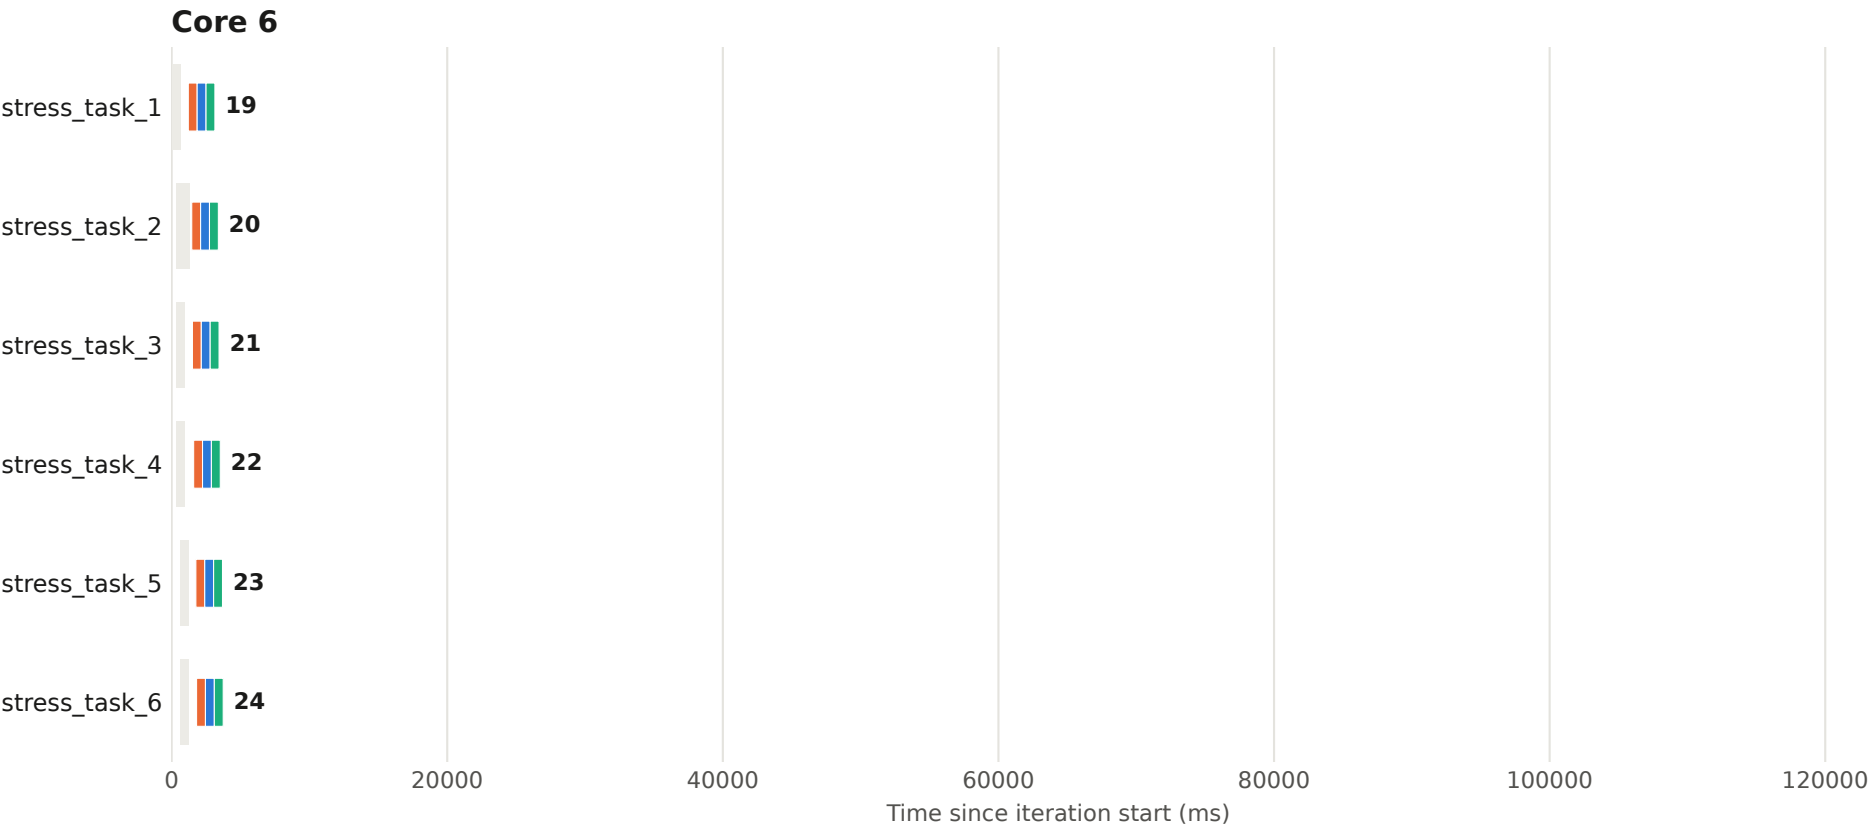


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 70 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

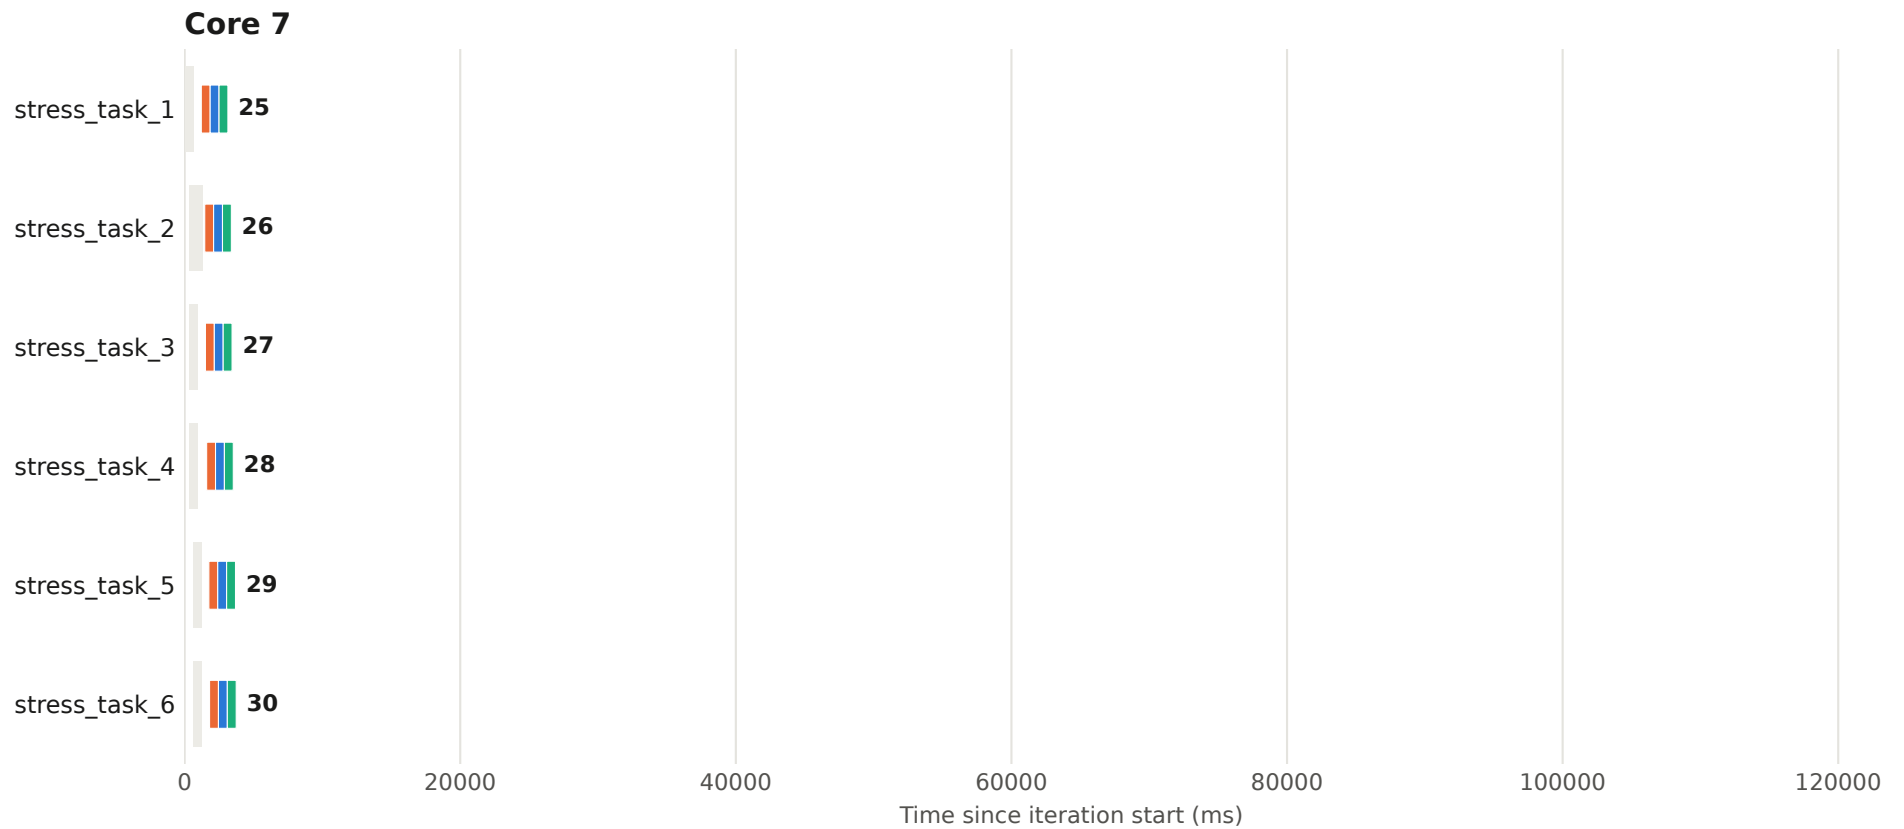


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 71 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

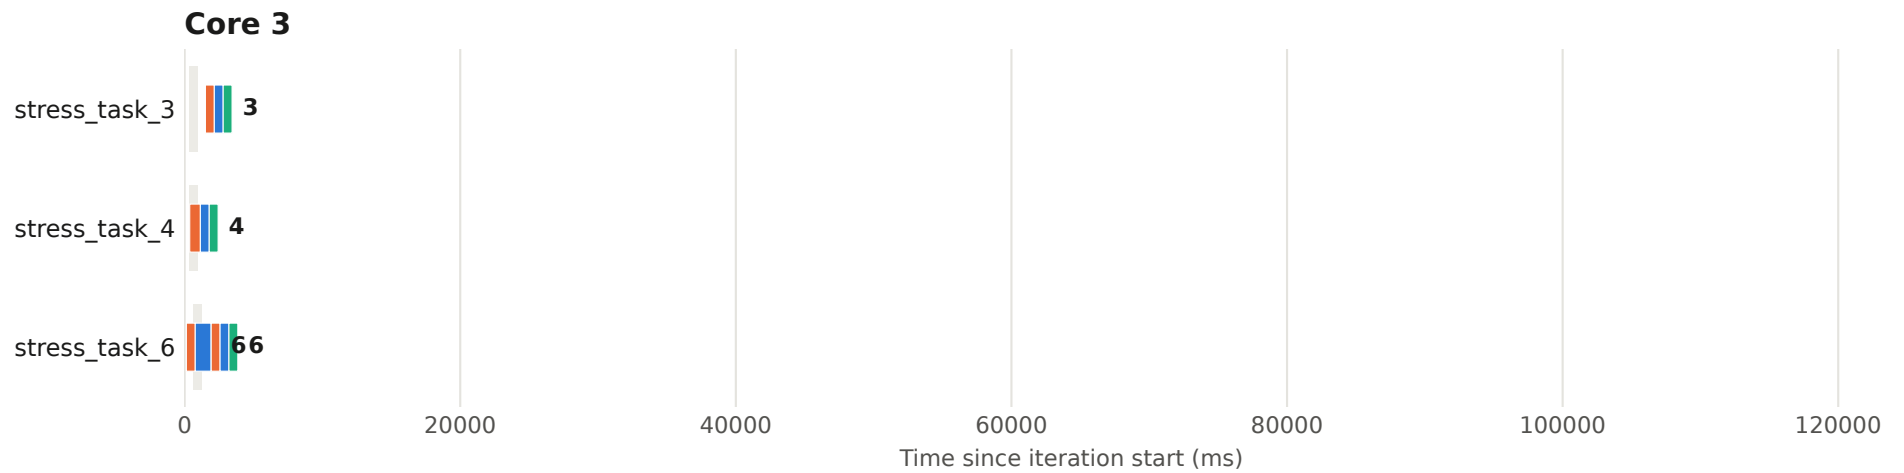

Execution plan - iteration 71 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

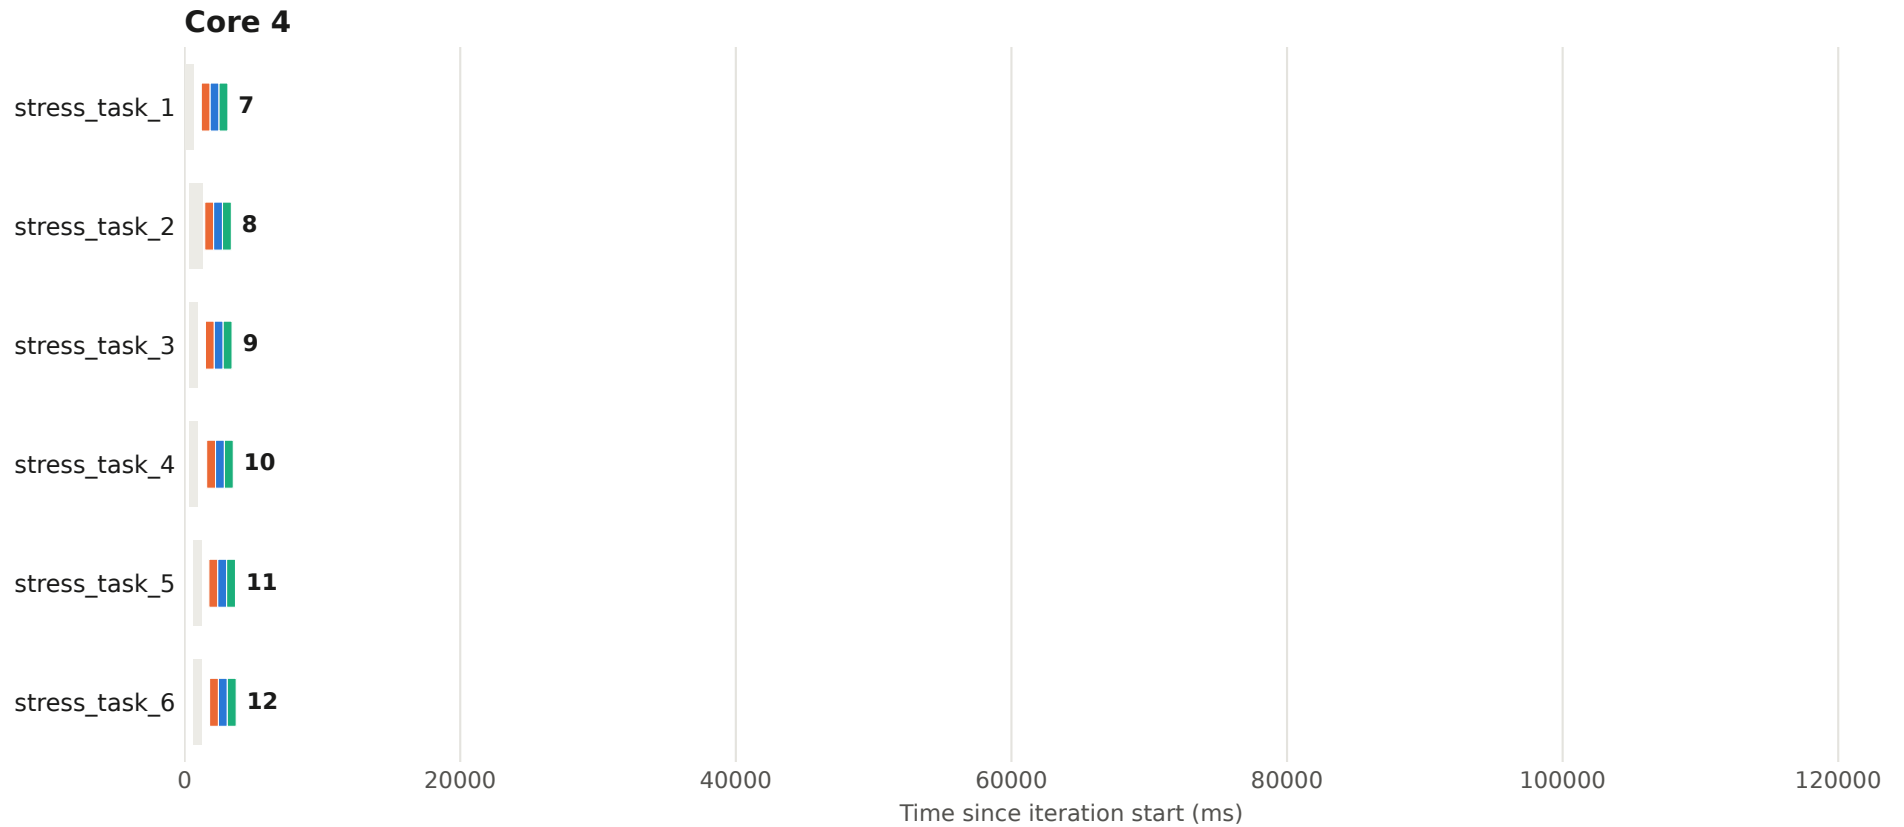


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 71 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

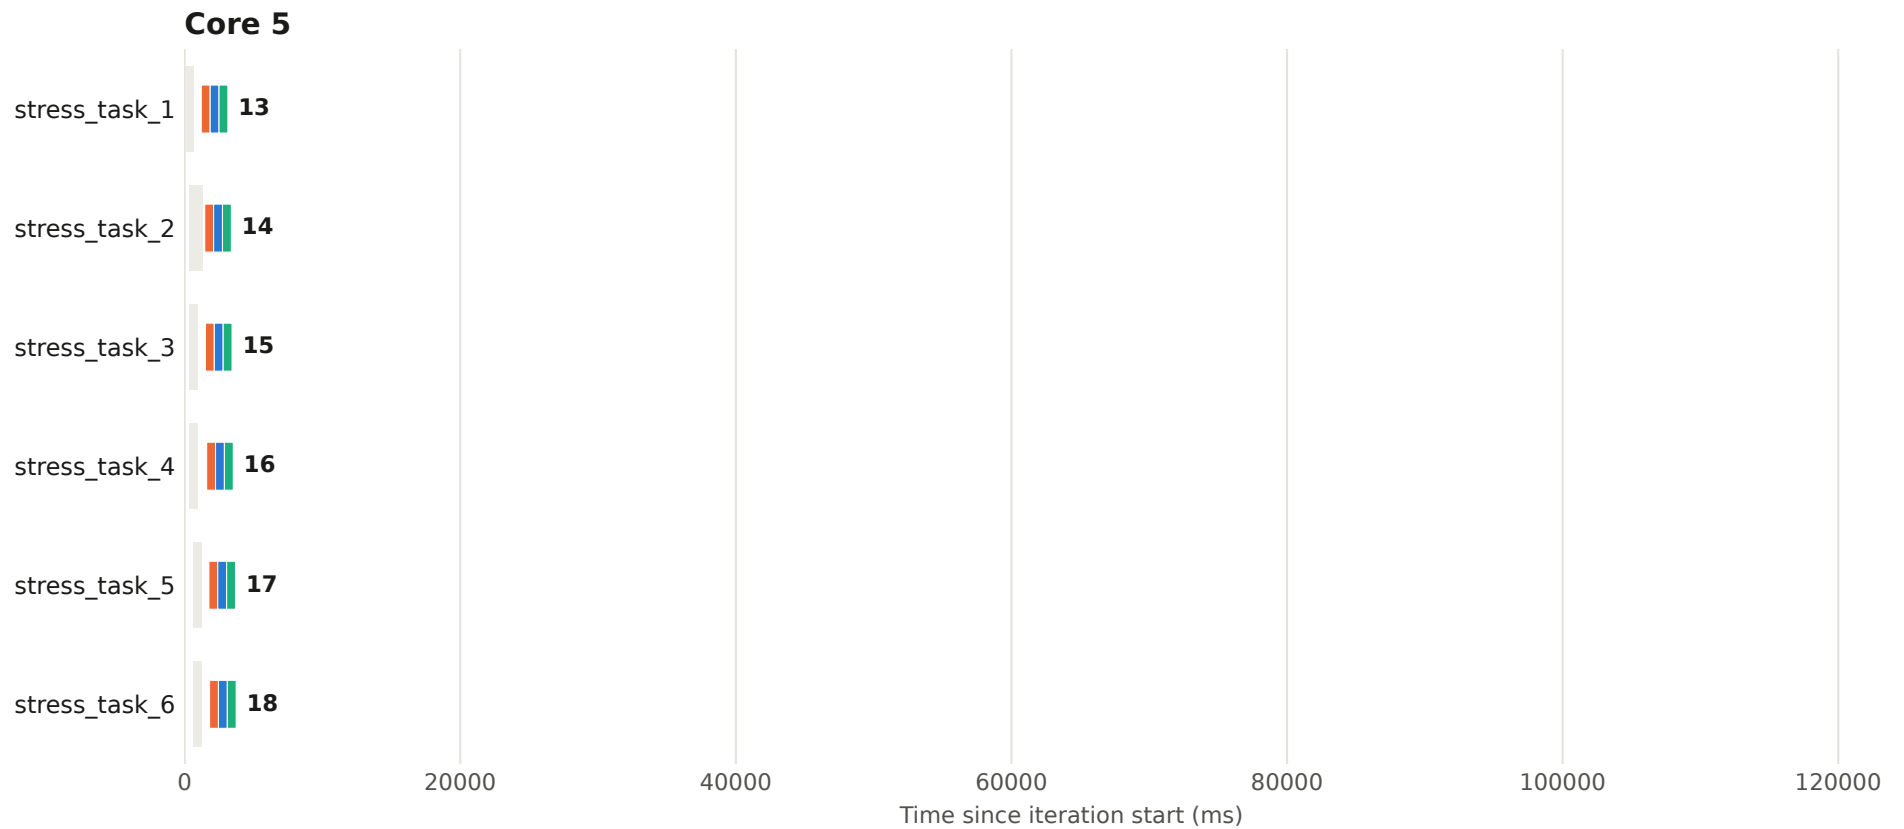


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 71 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

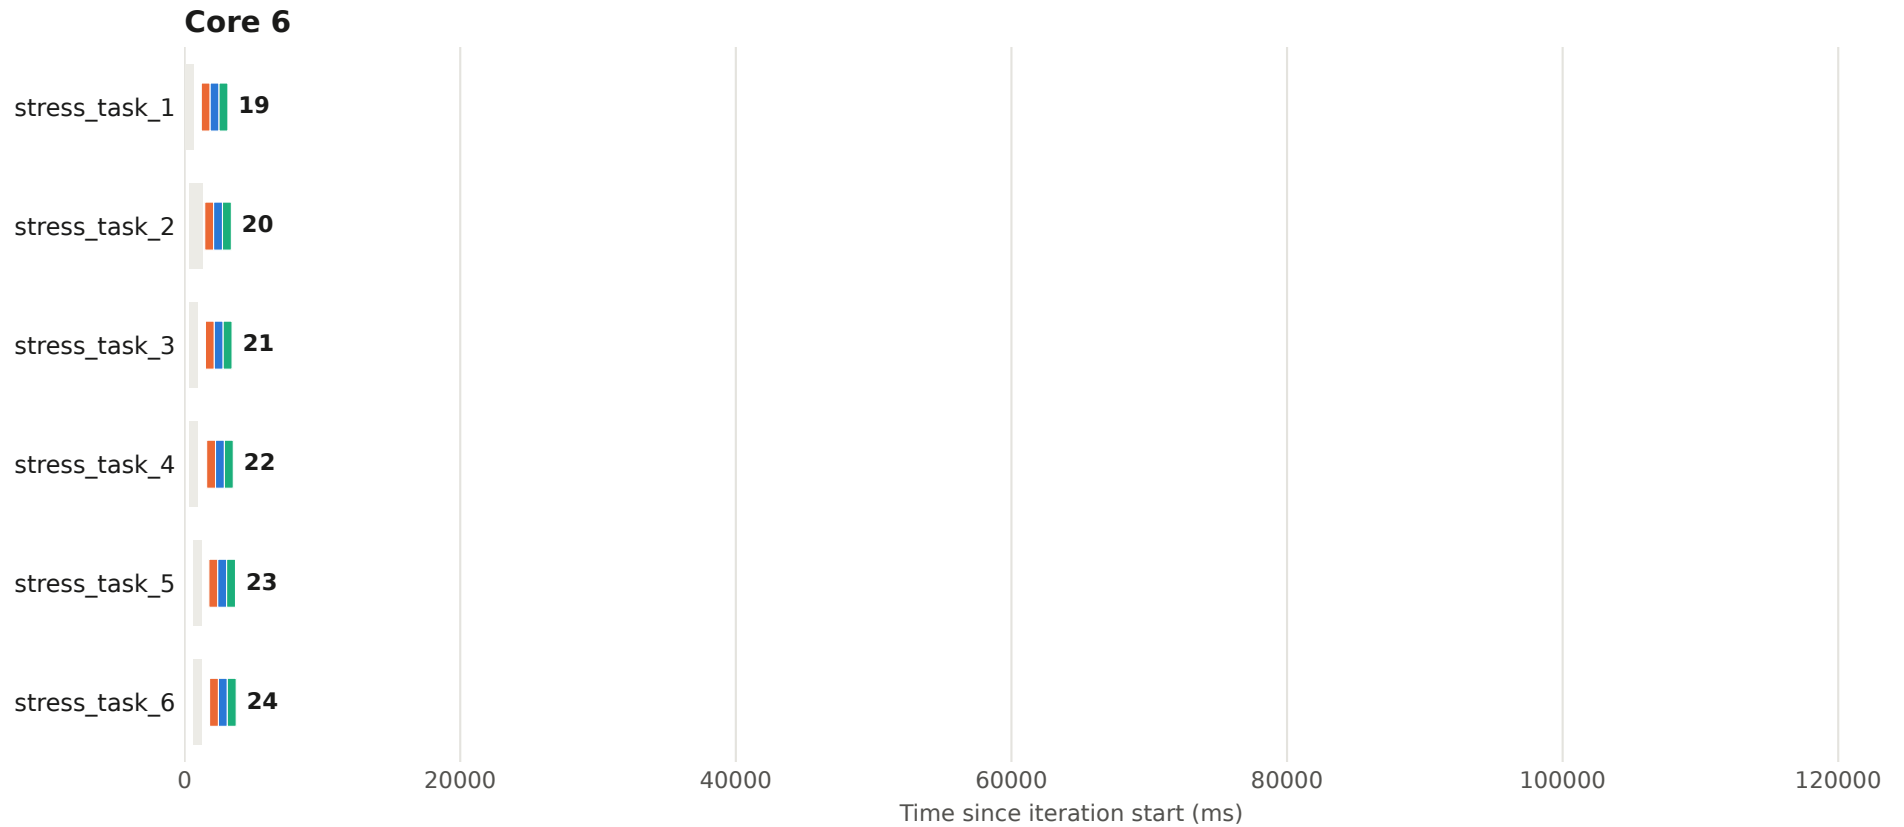


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 71 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

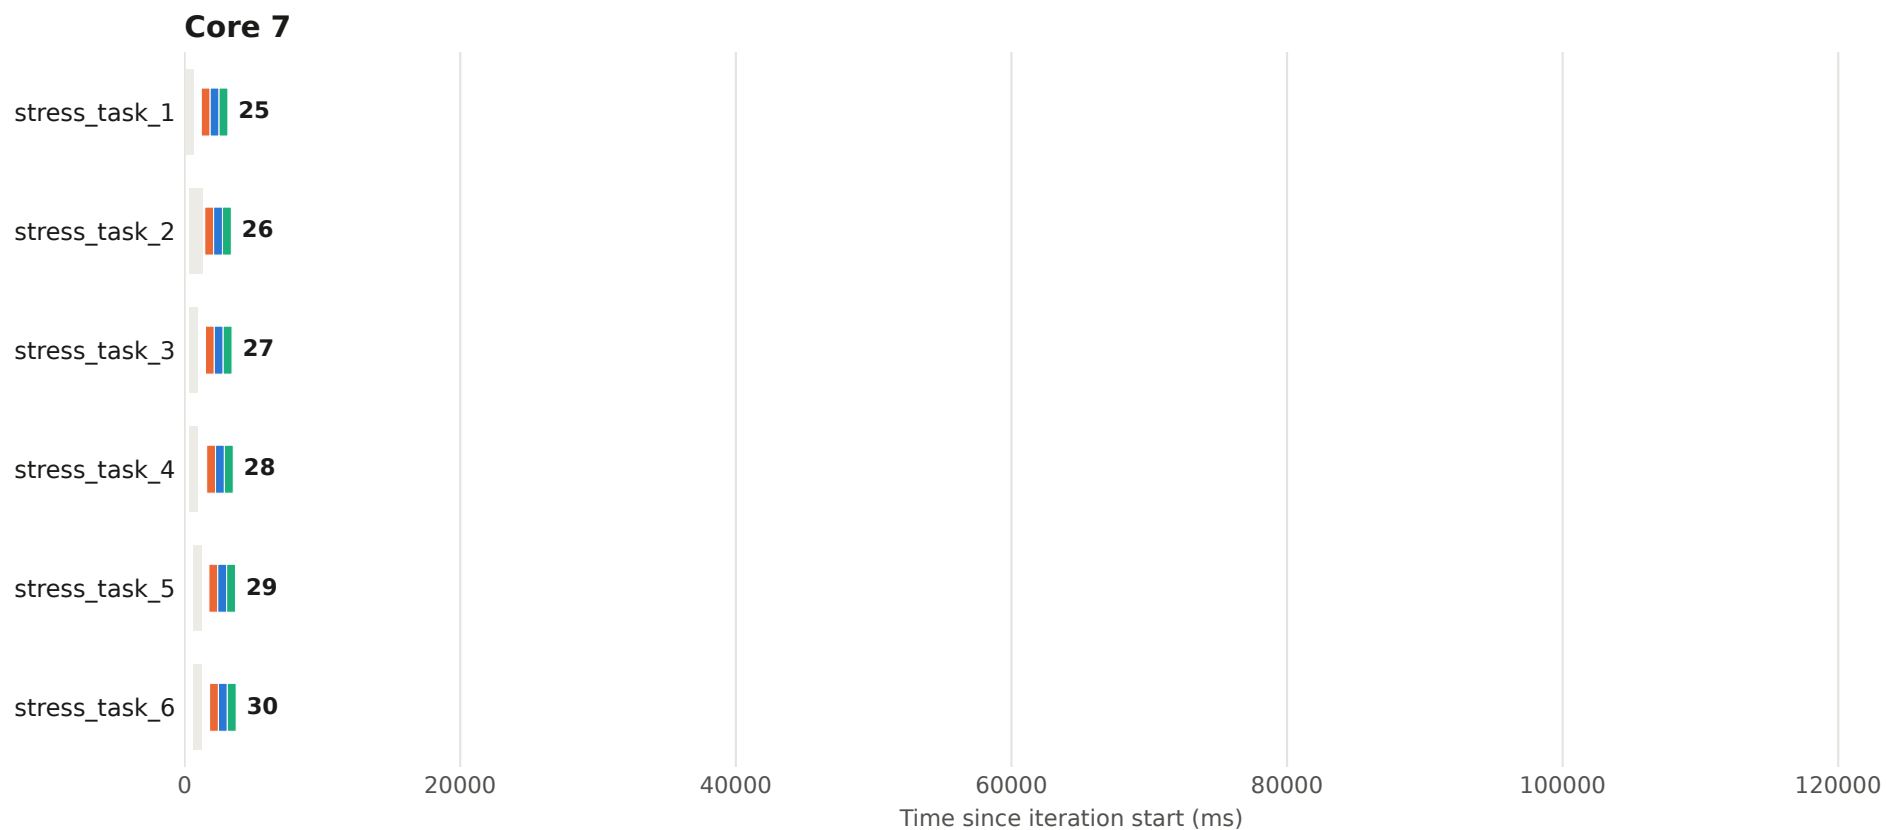


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 72 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

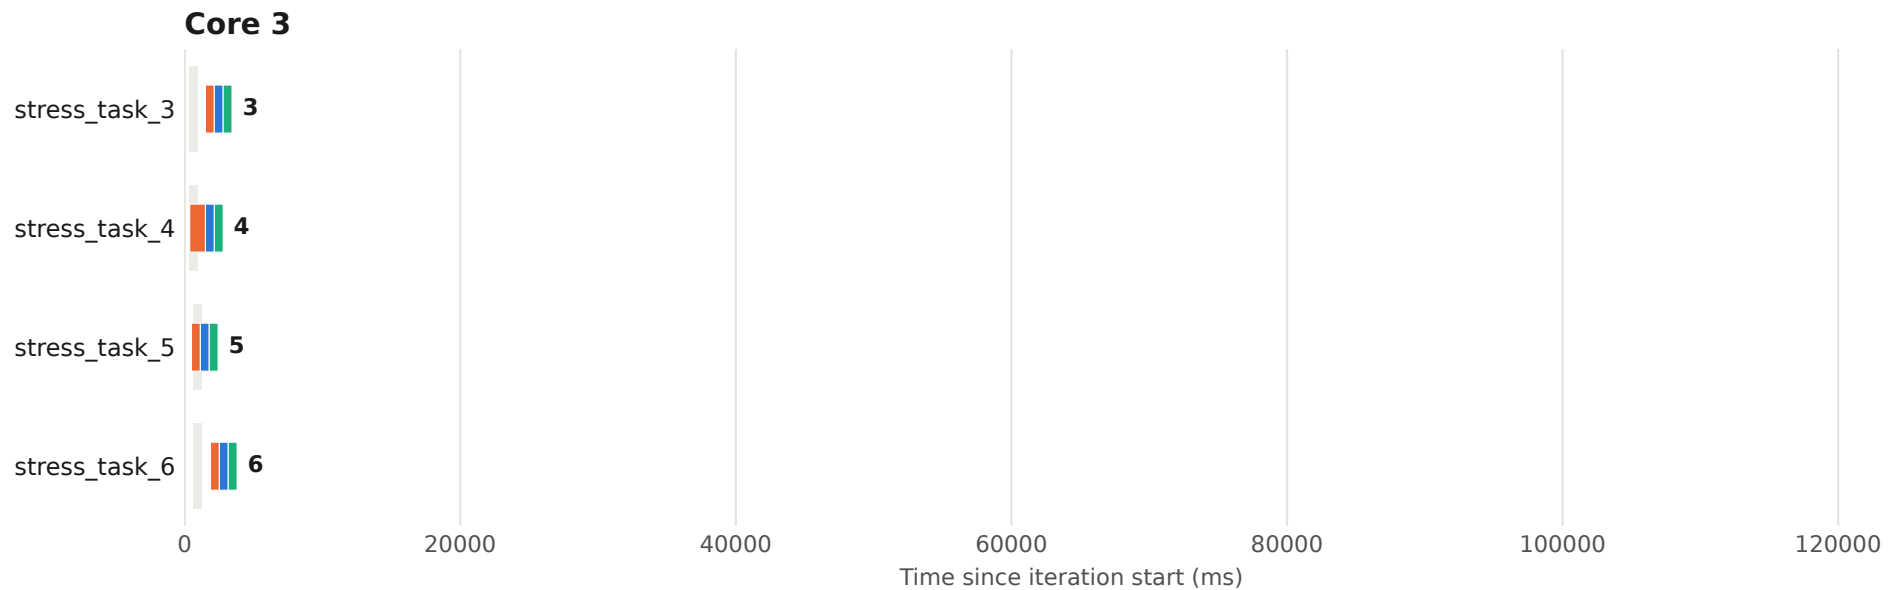

Execution plan - iteration 72 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

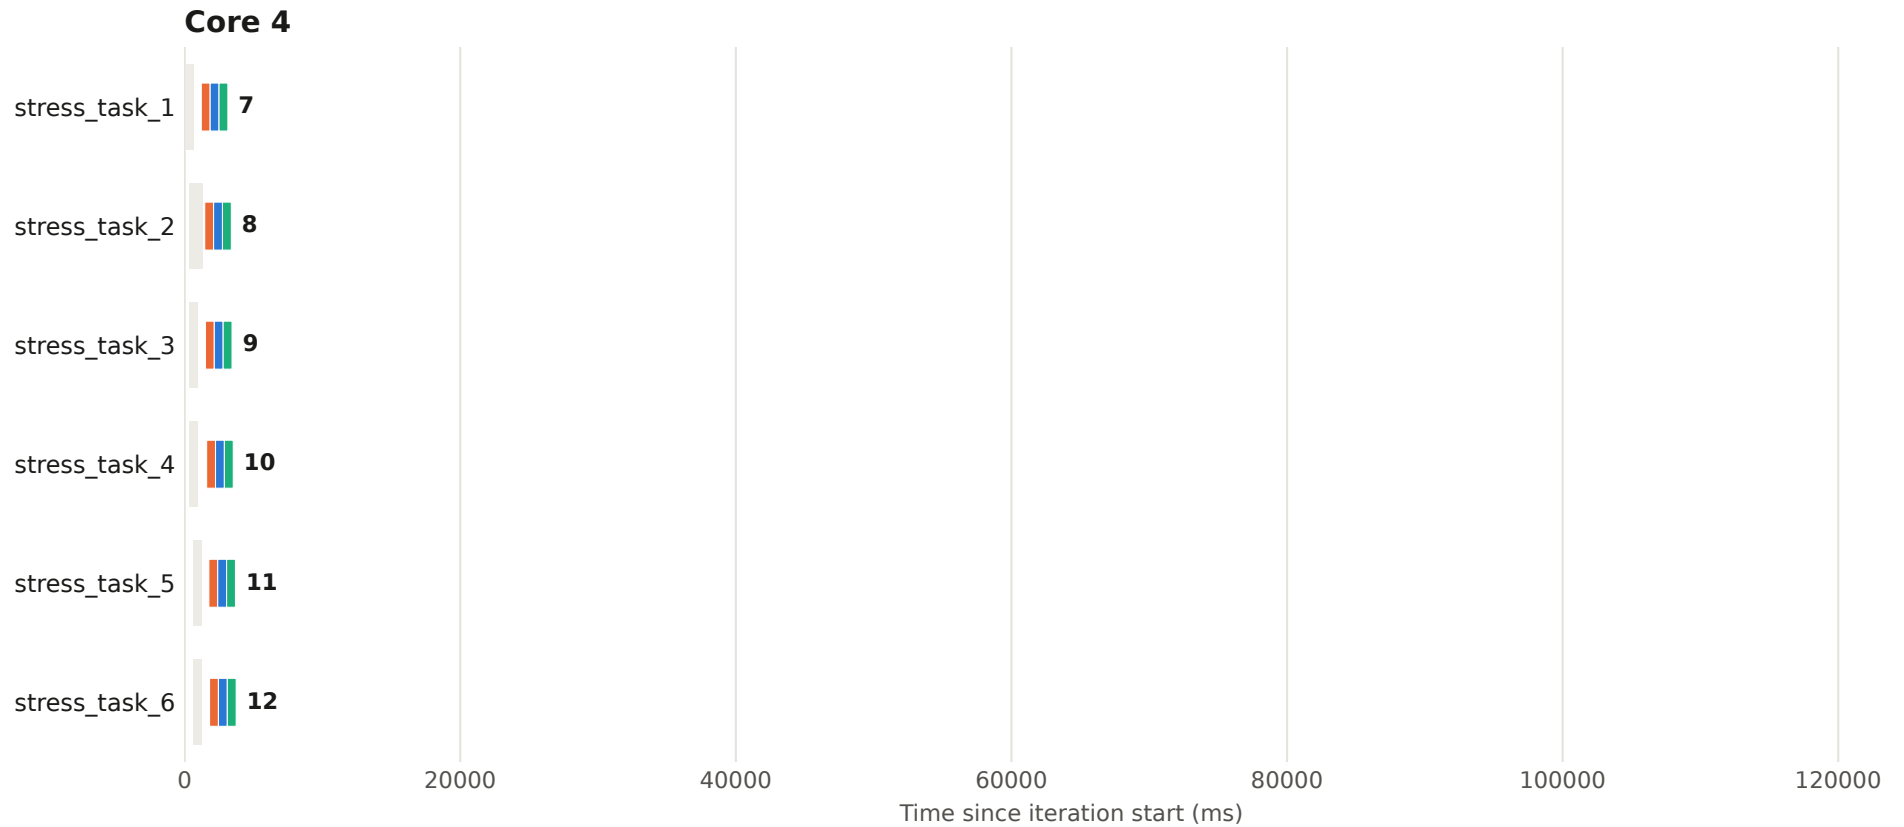


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 72 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

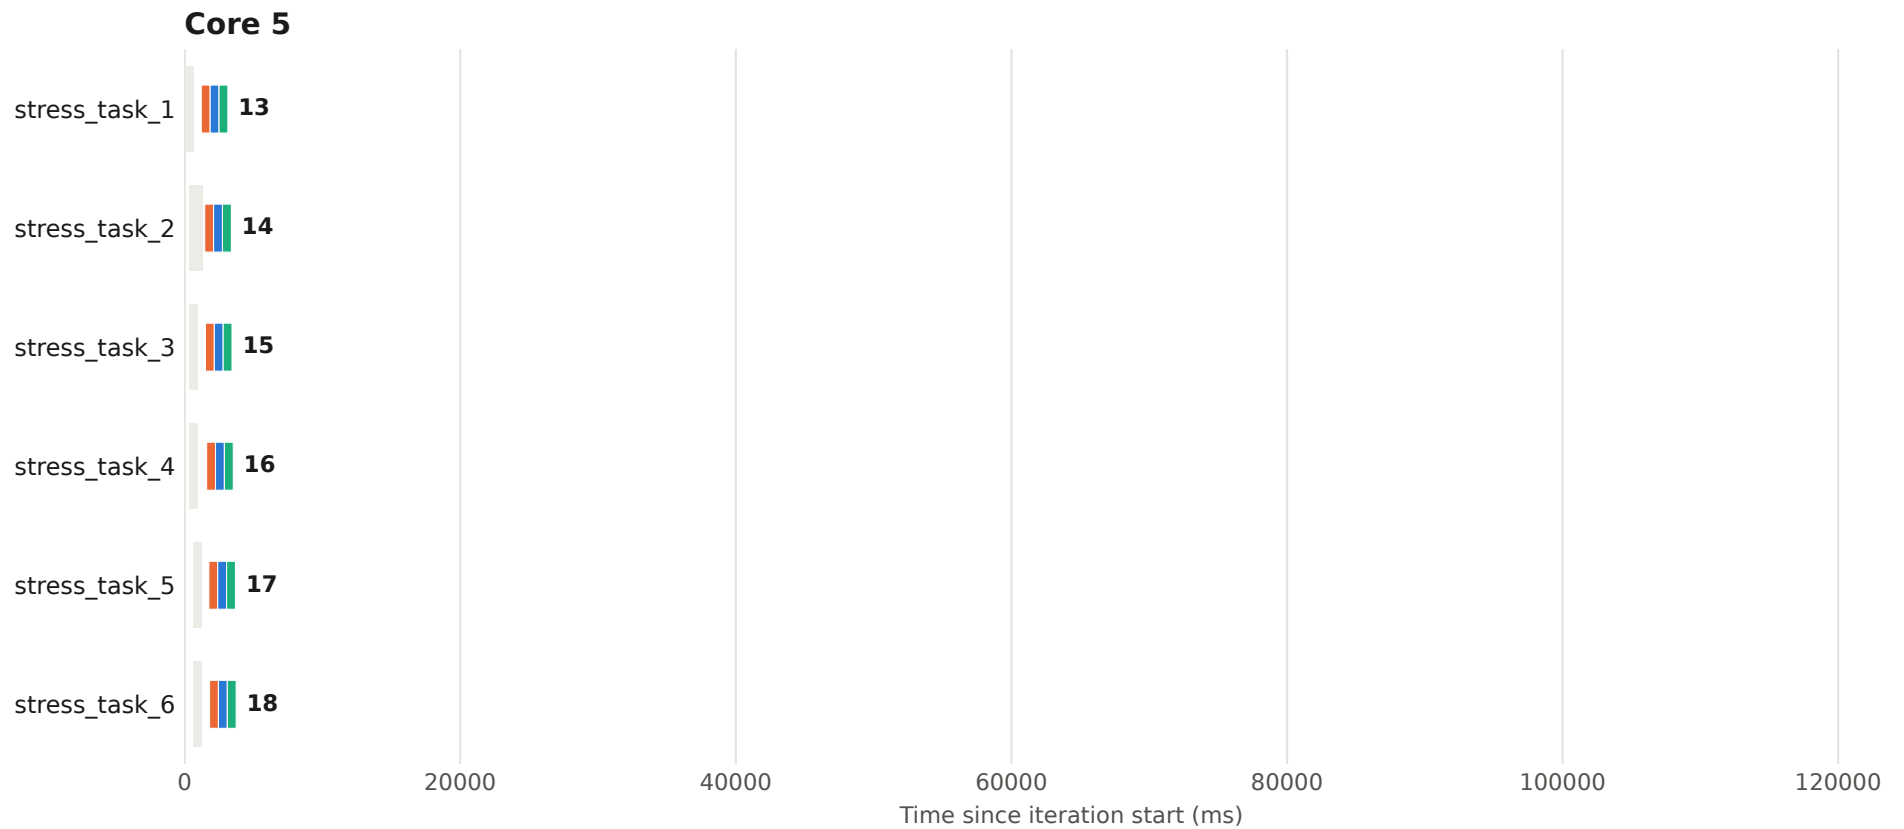


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 72 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

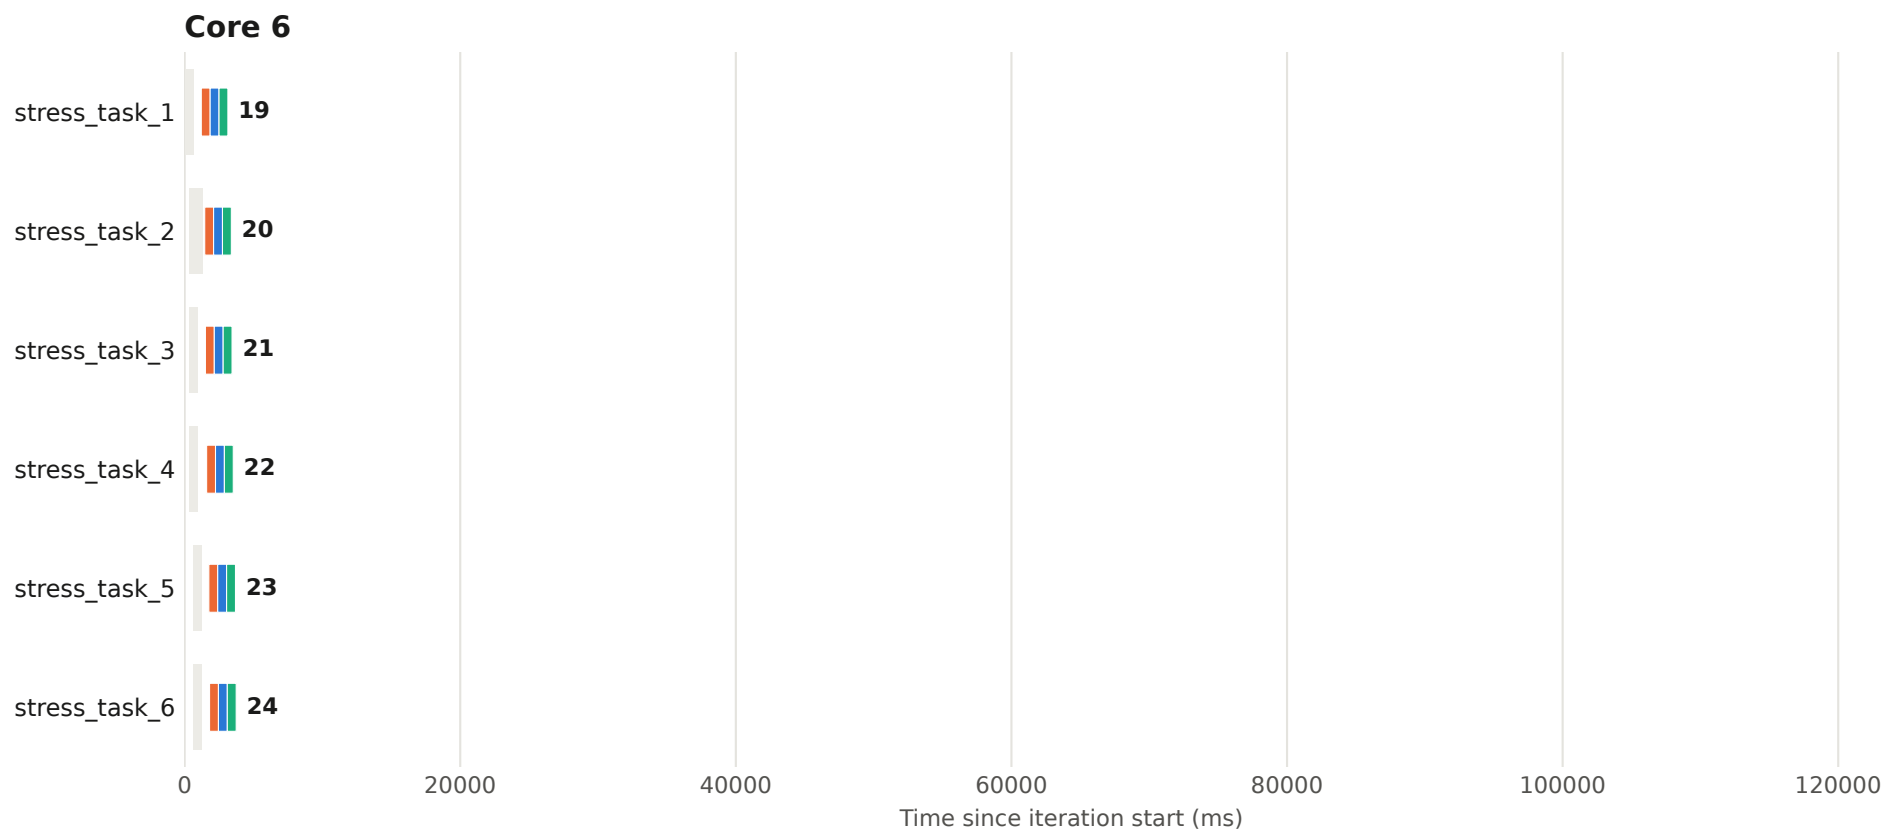


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 72 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

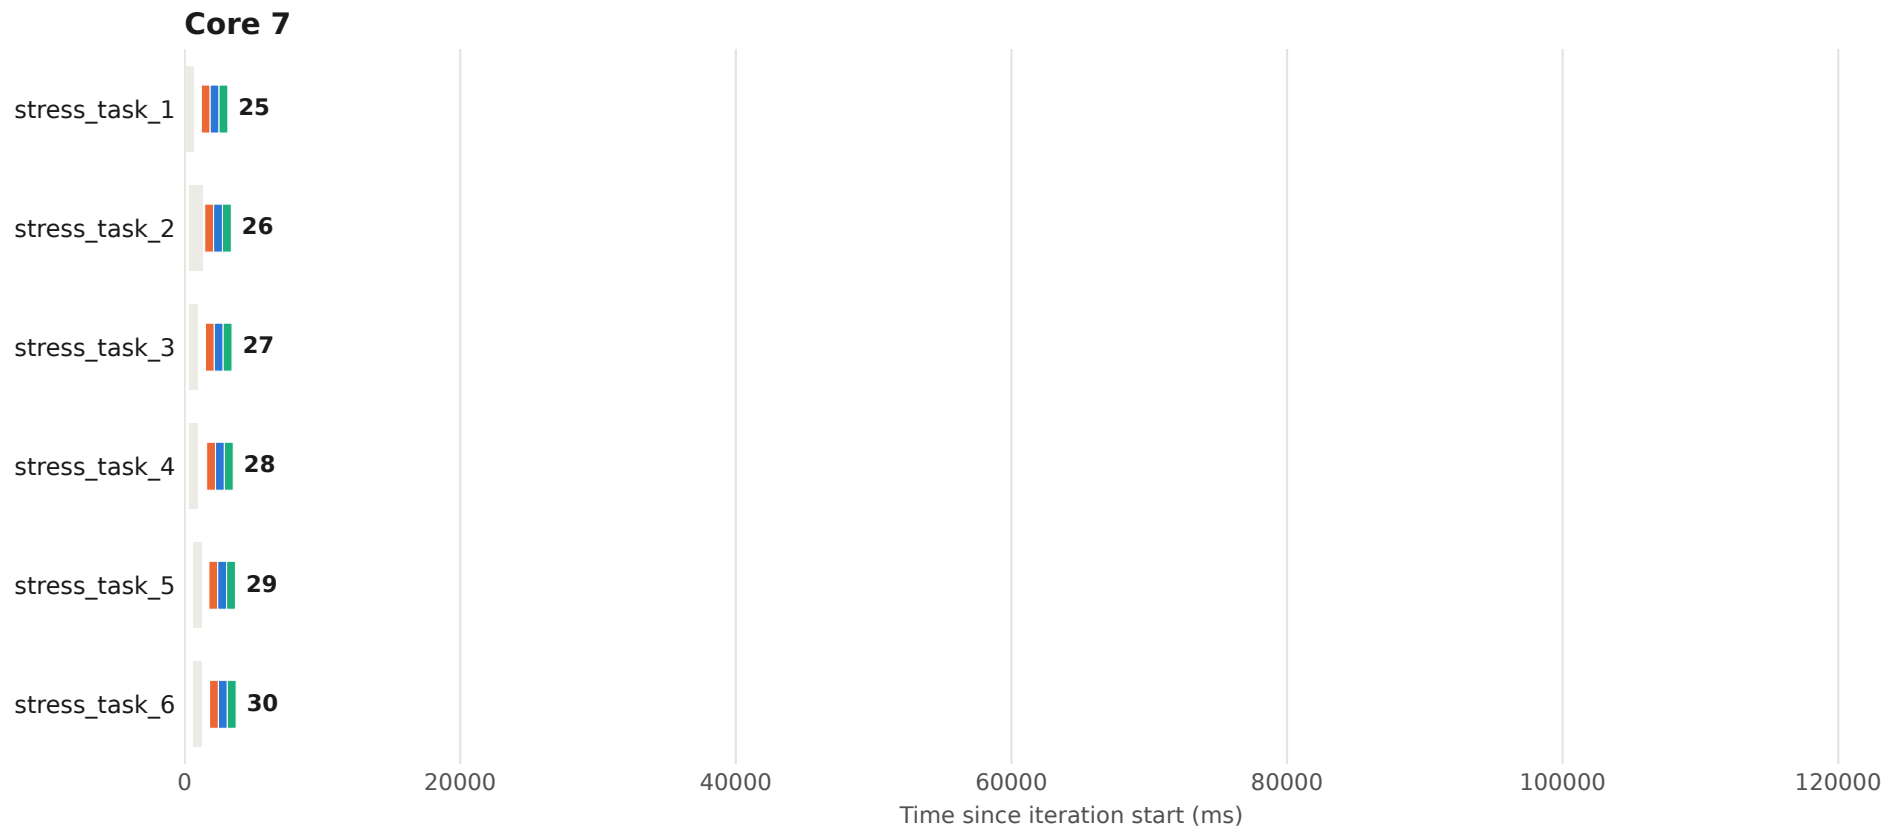


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 73 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

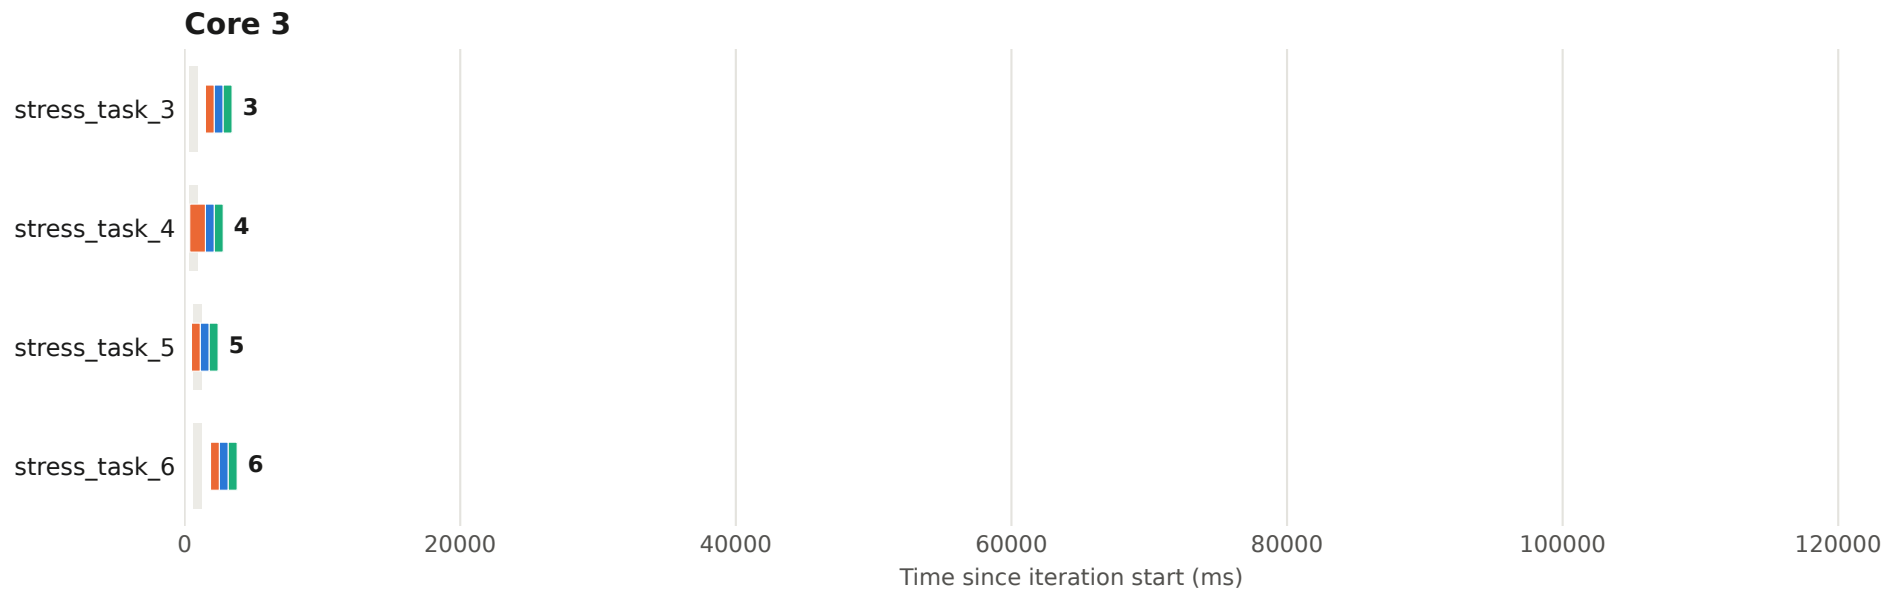


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 73 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

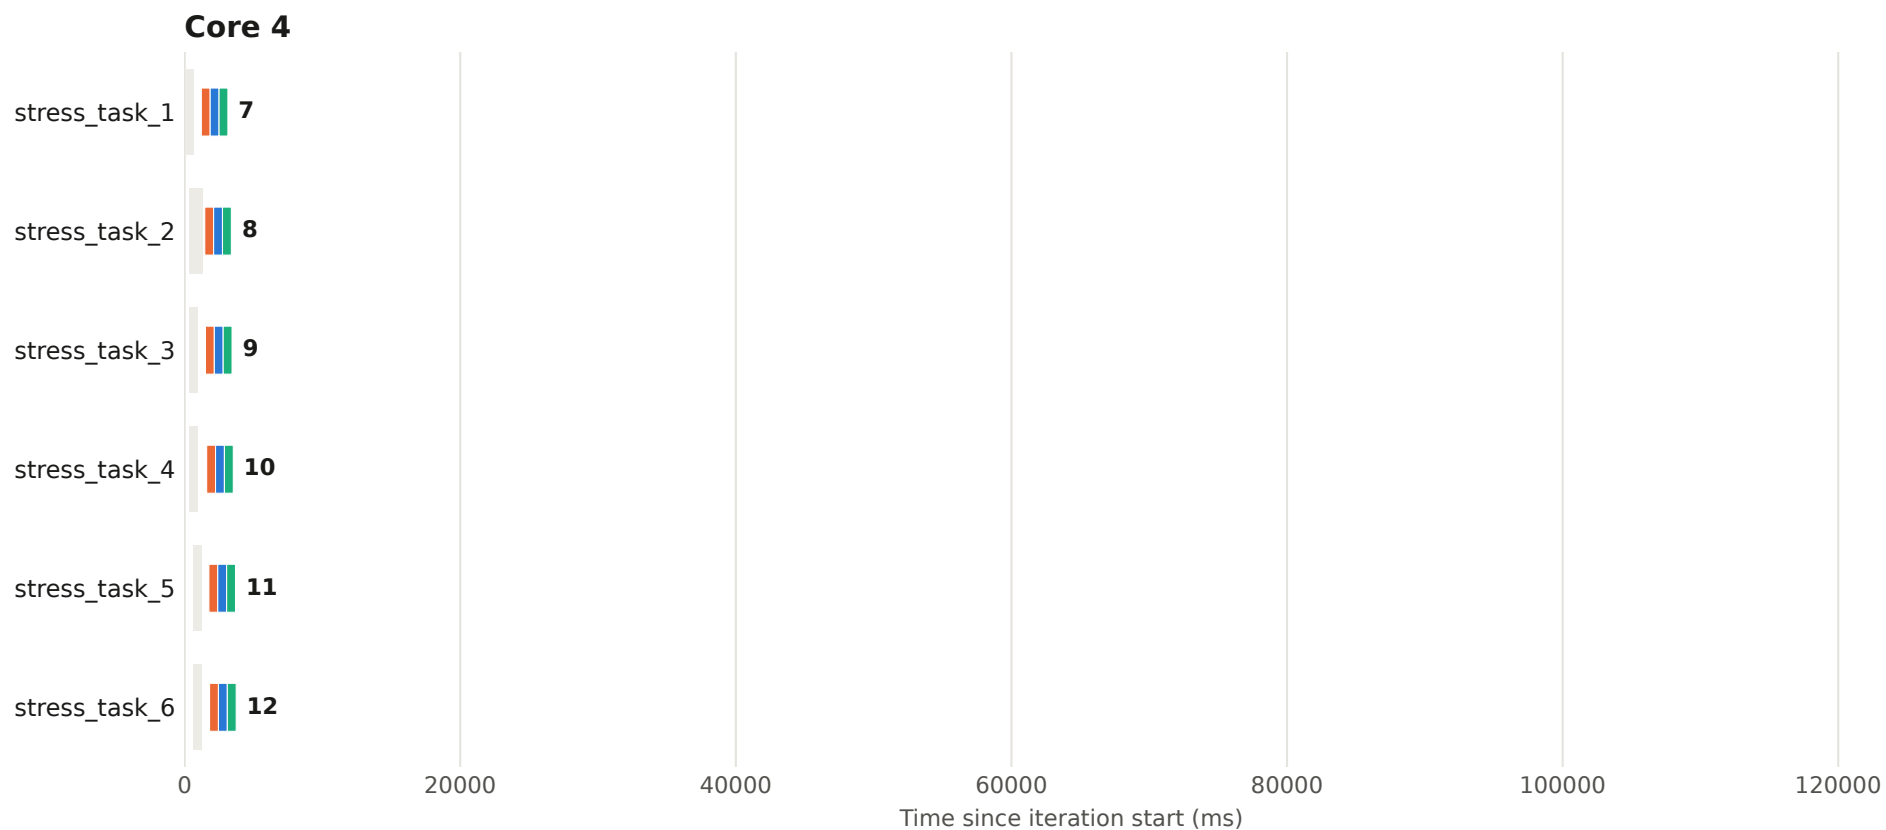


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 73 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

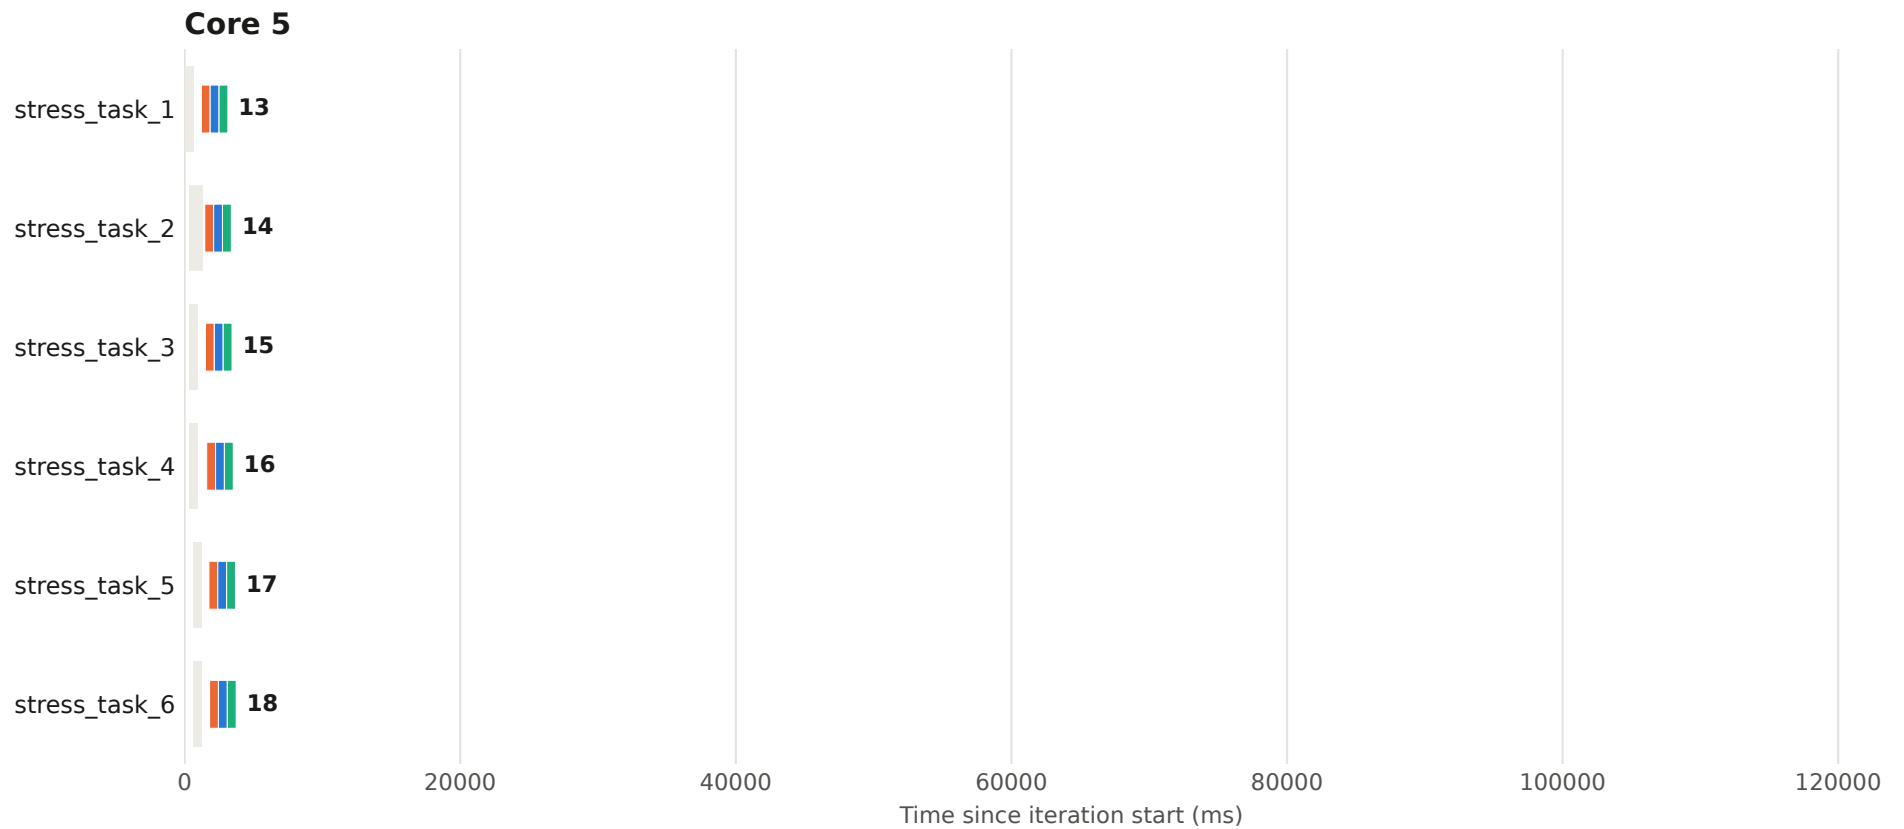


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 73 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

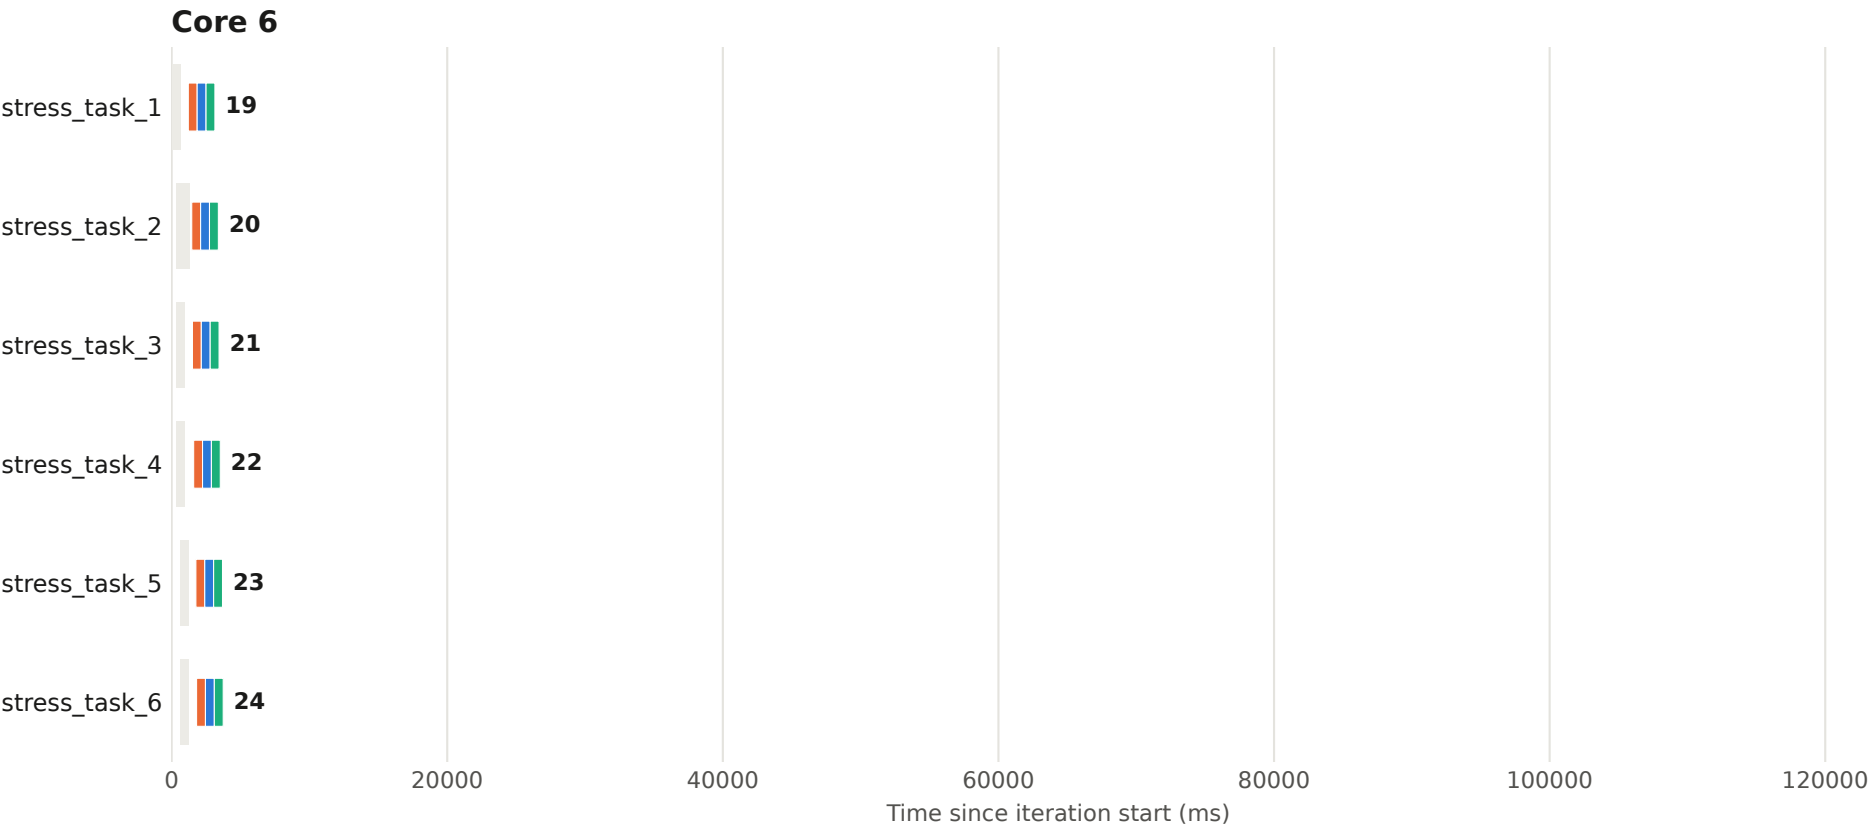


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 73 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

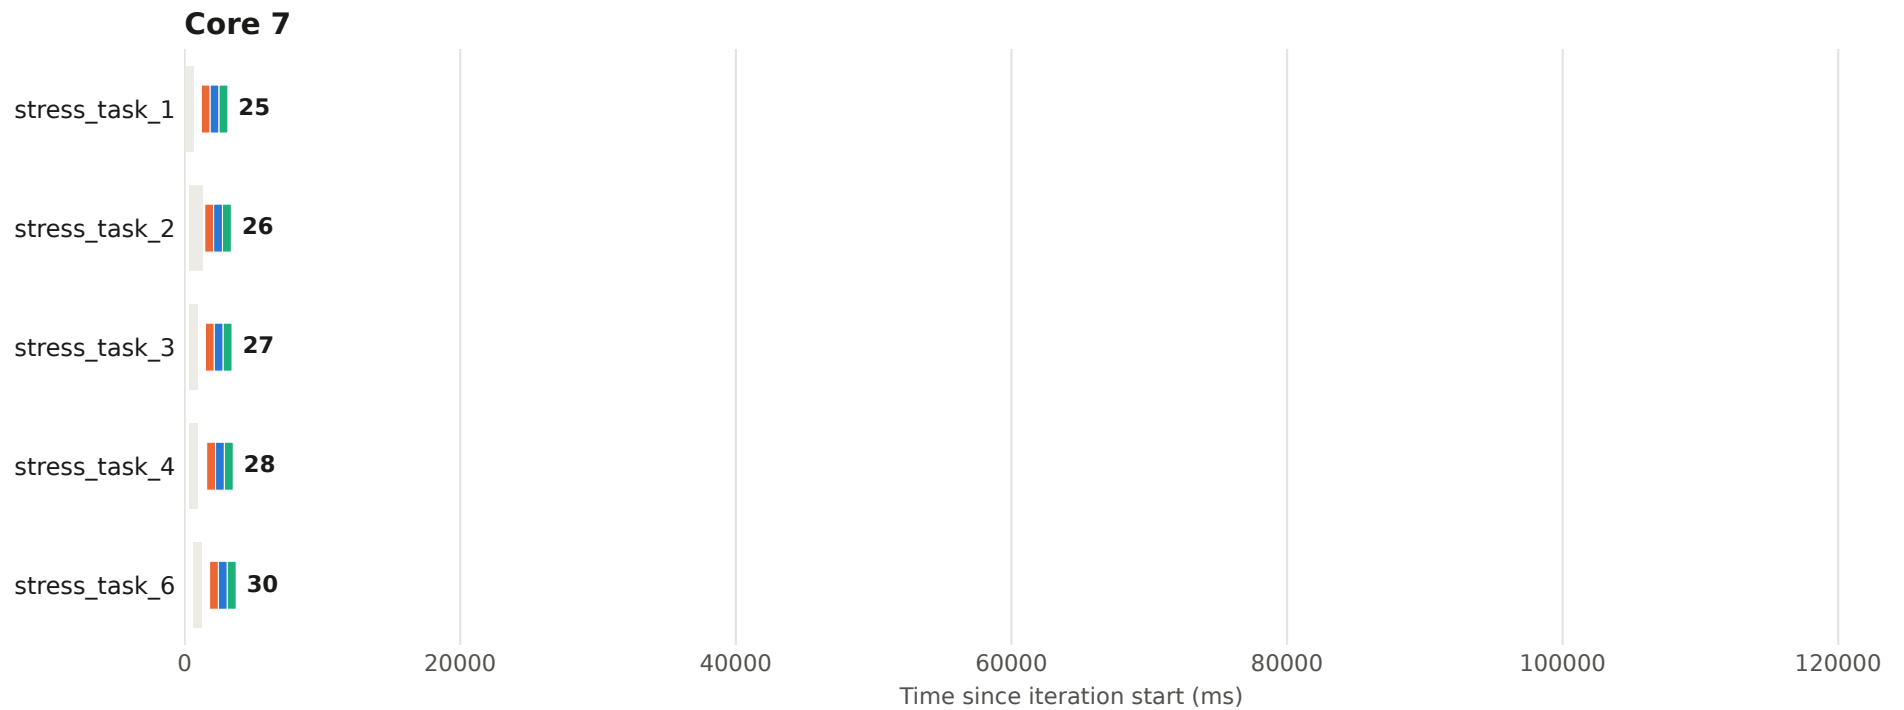


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 74 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

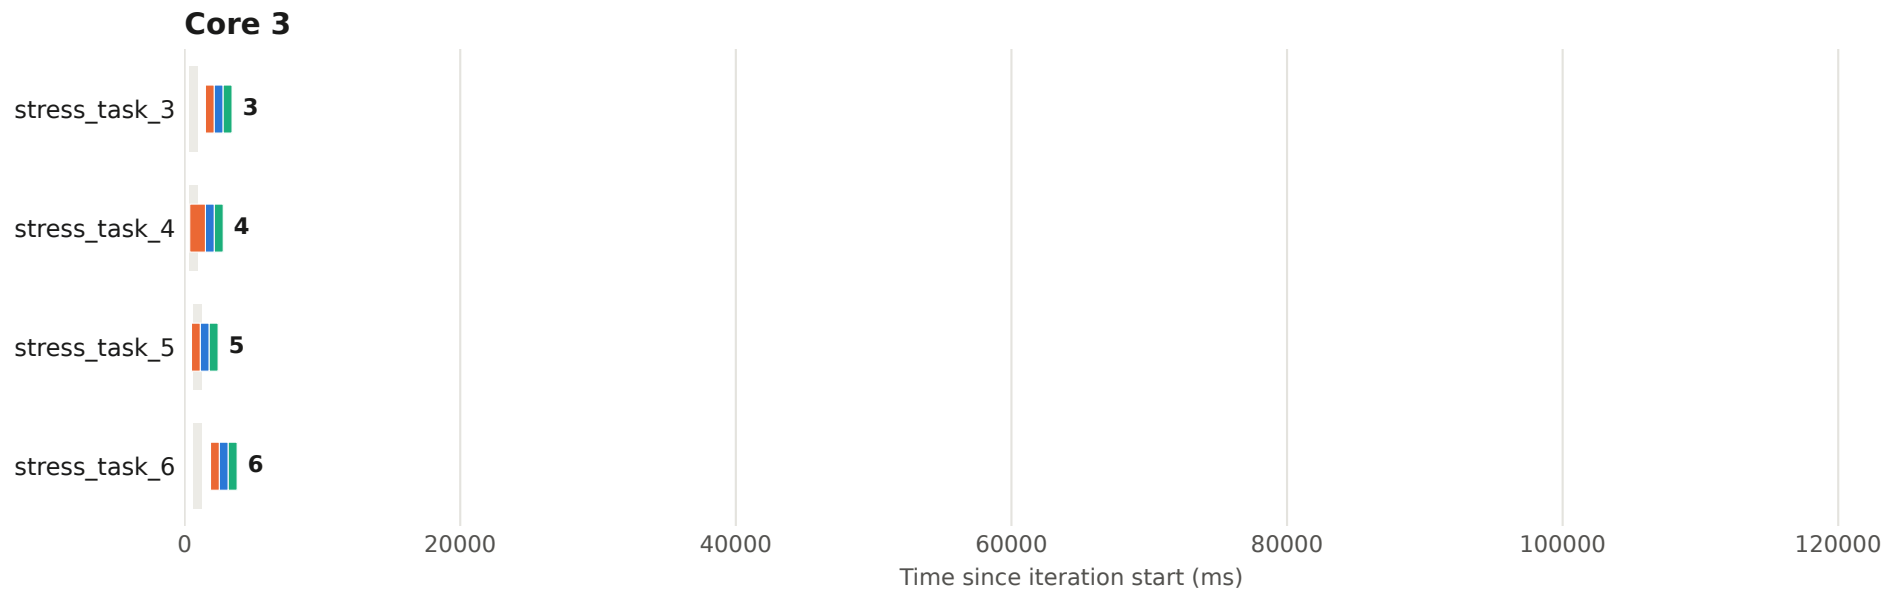

Execution plan - iteration 74 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

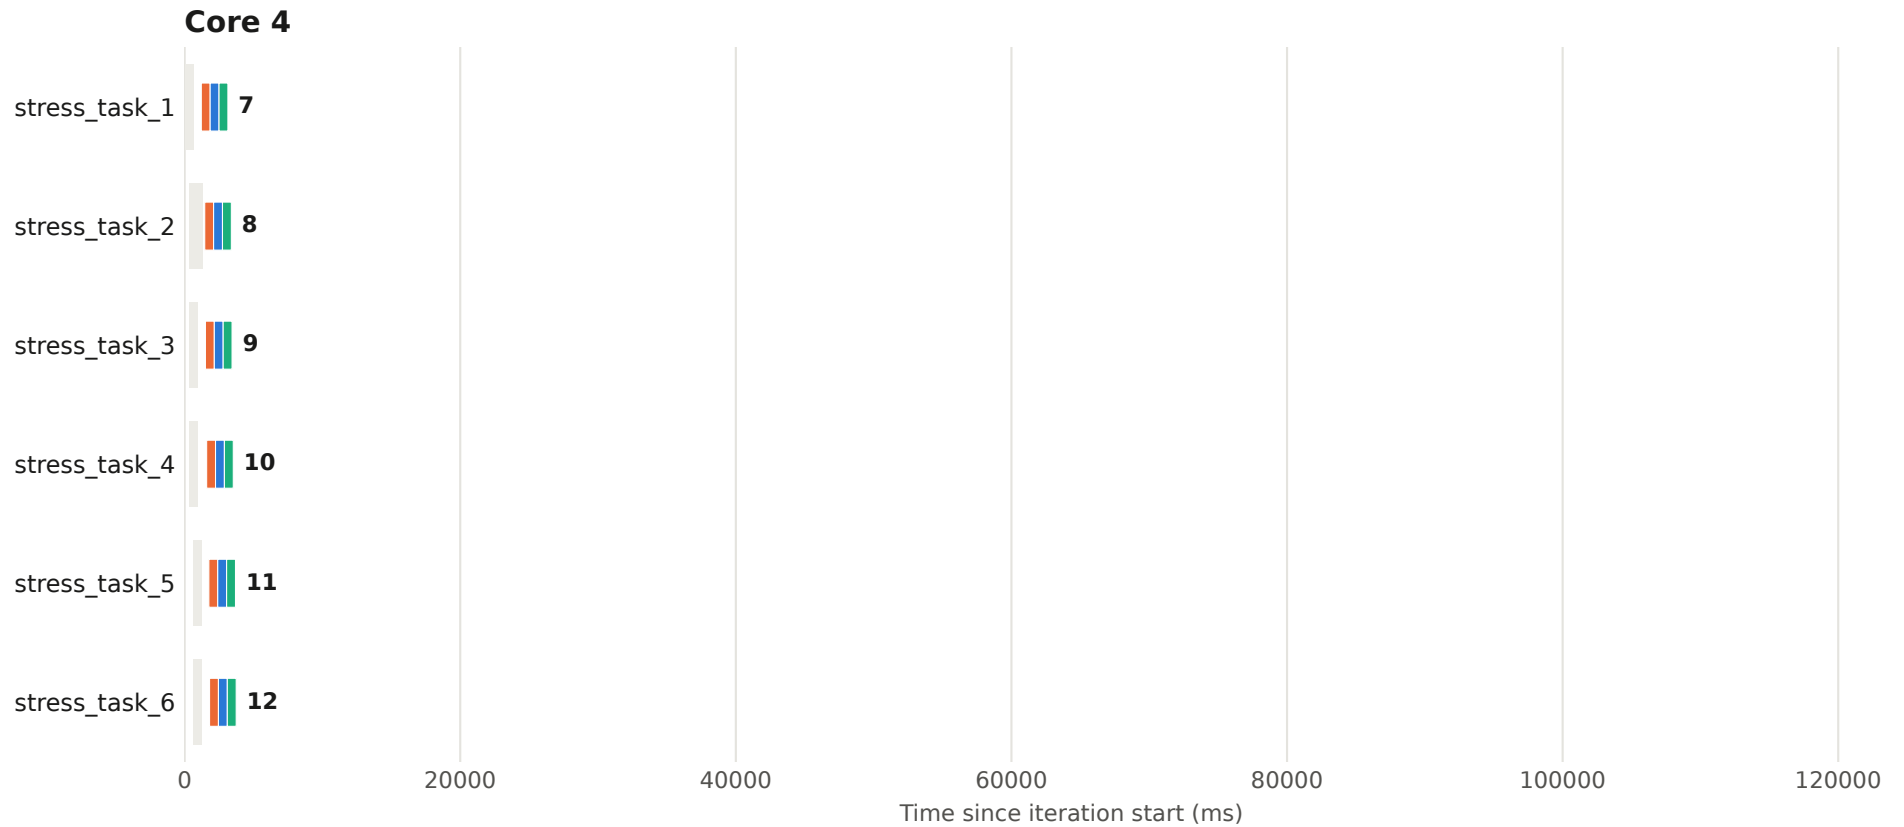


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 74 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

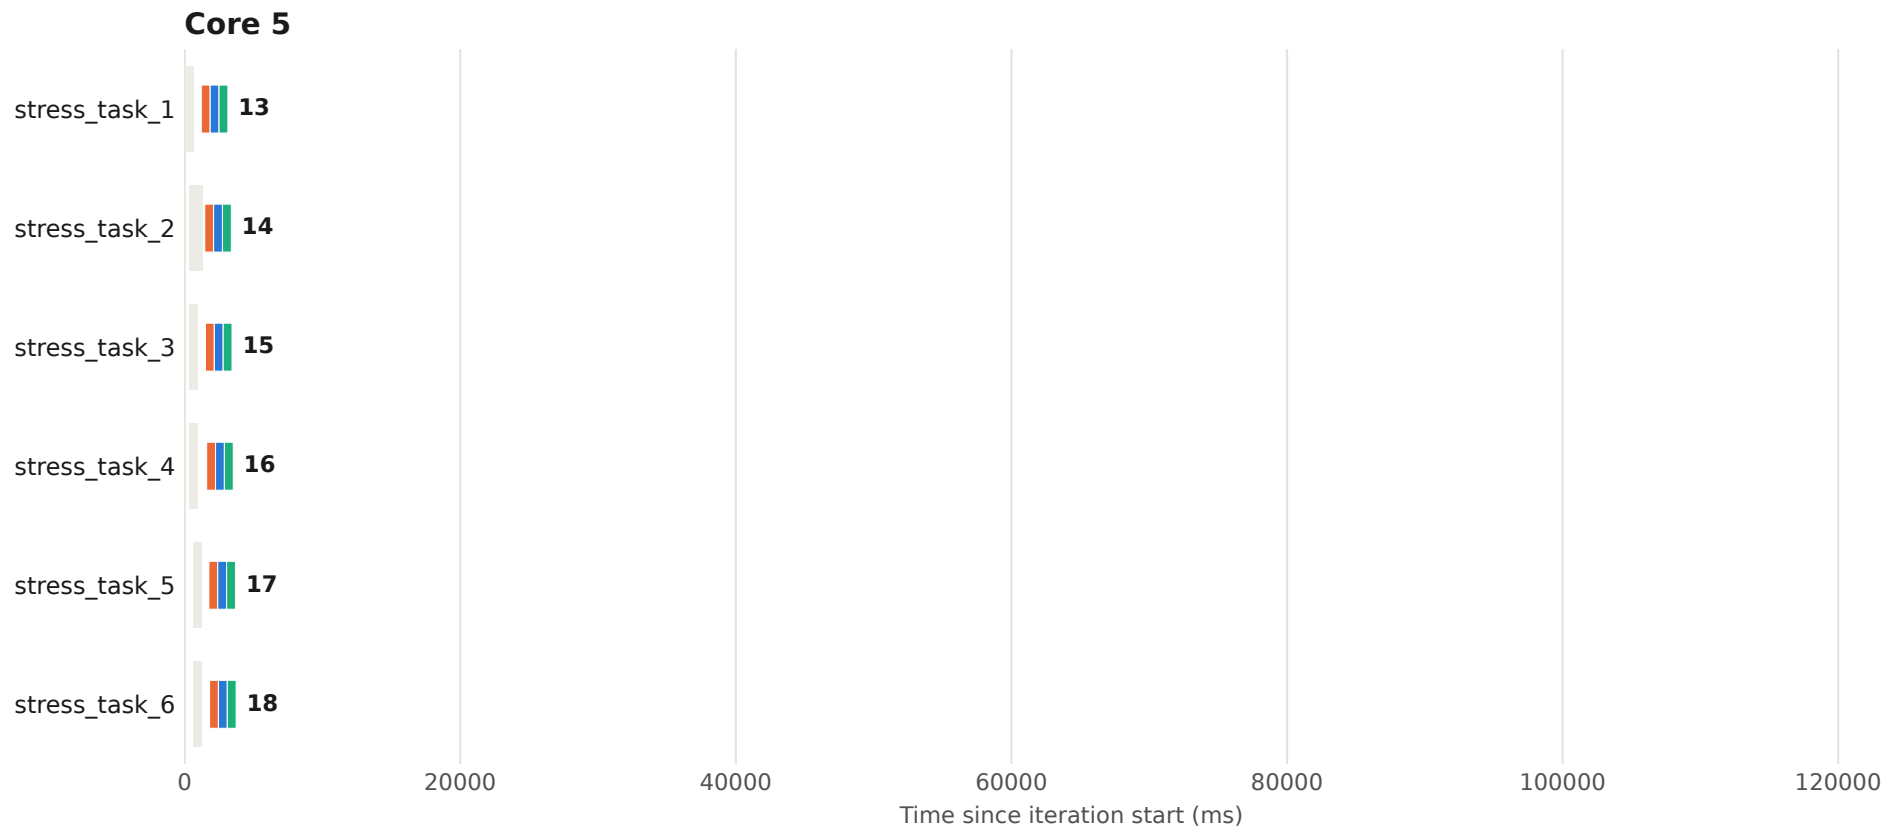


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 74 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

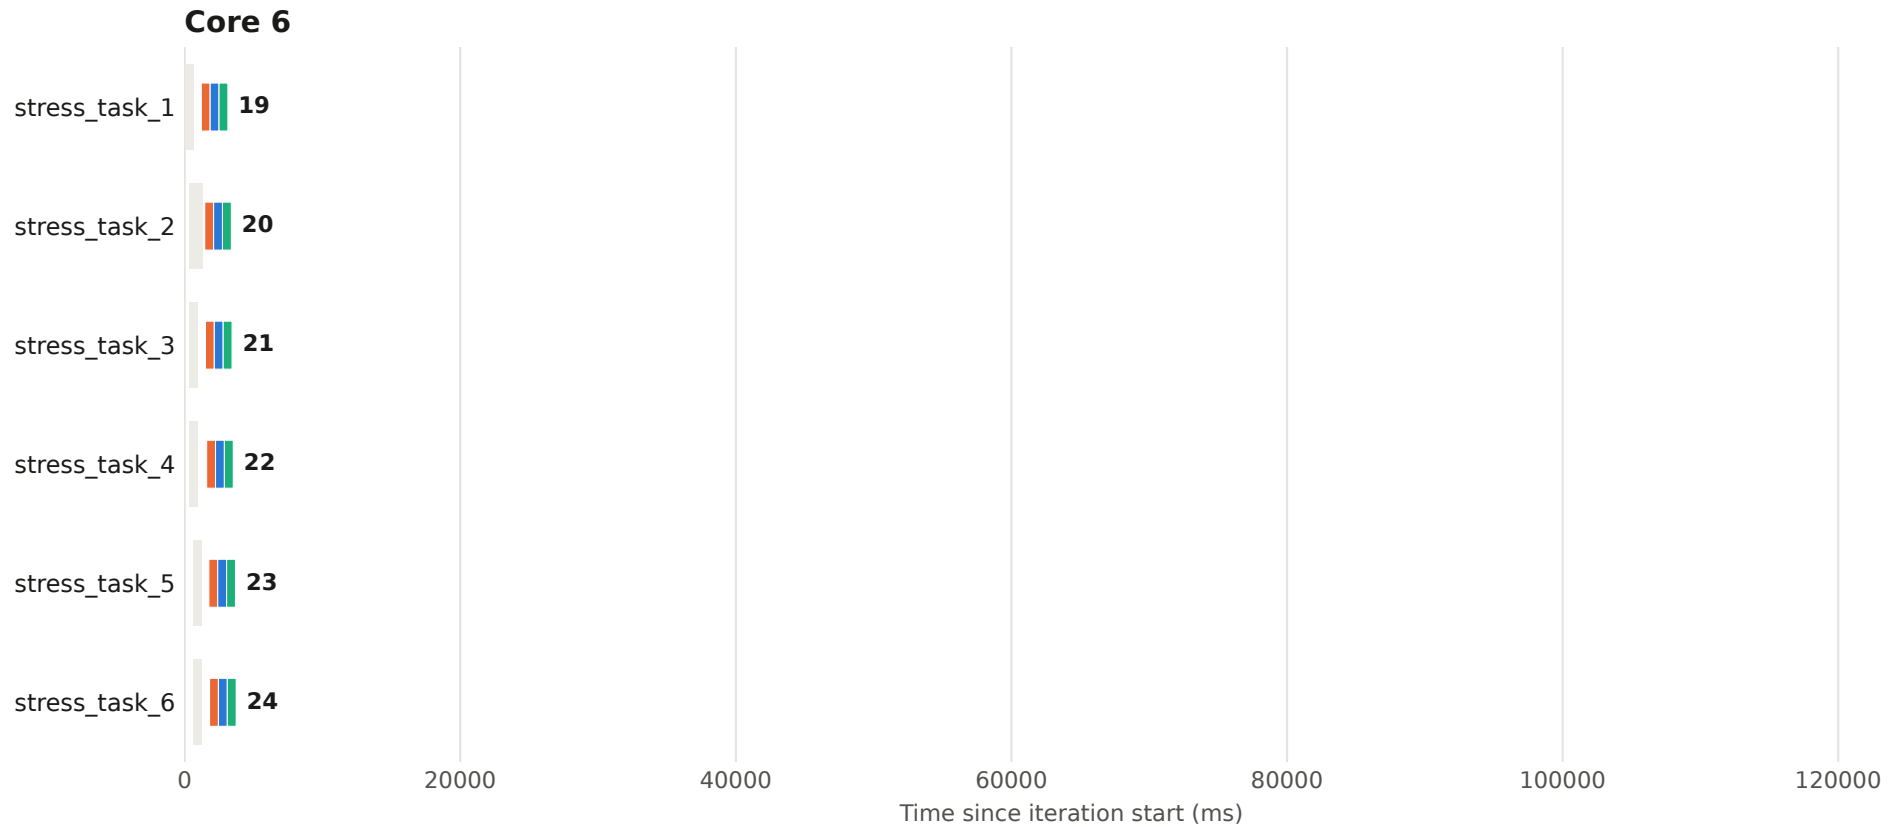


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 74 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

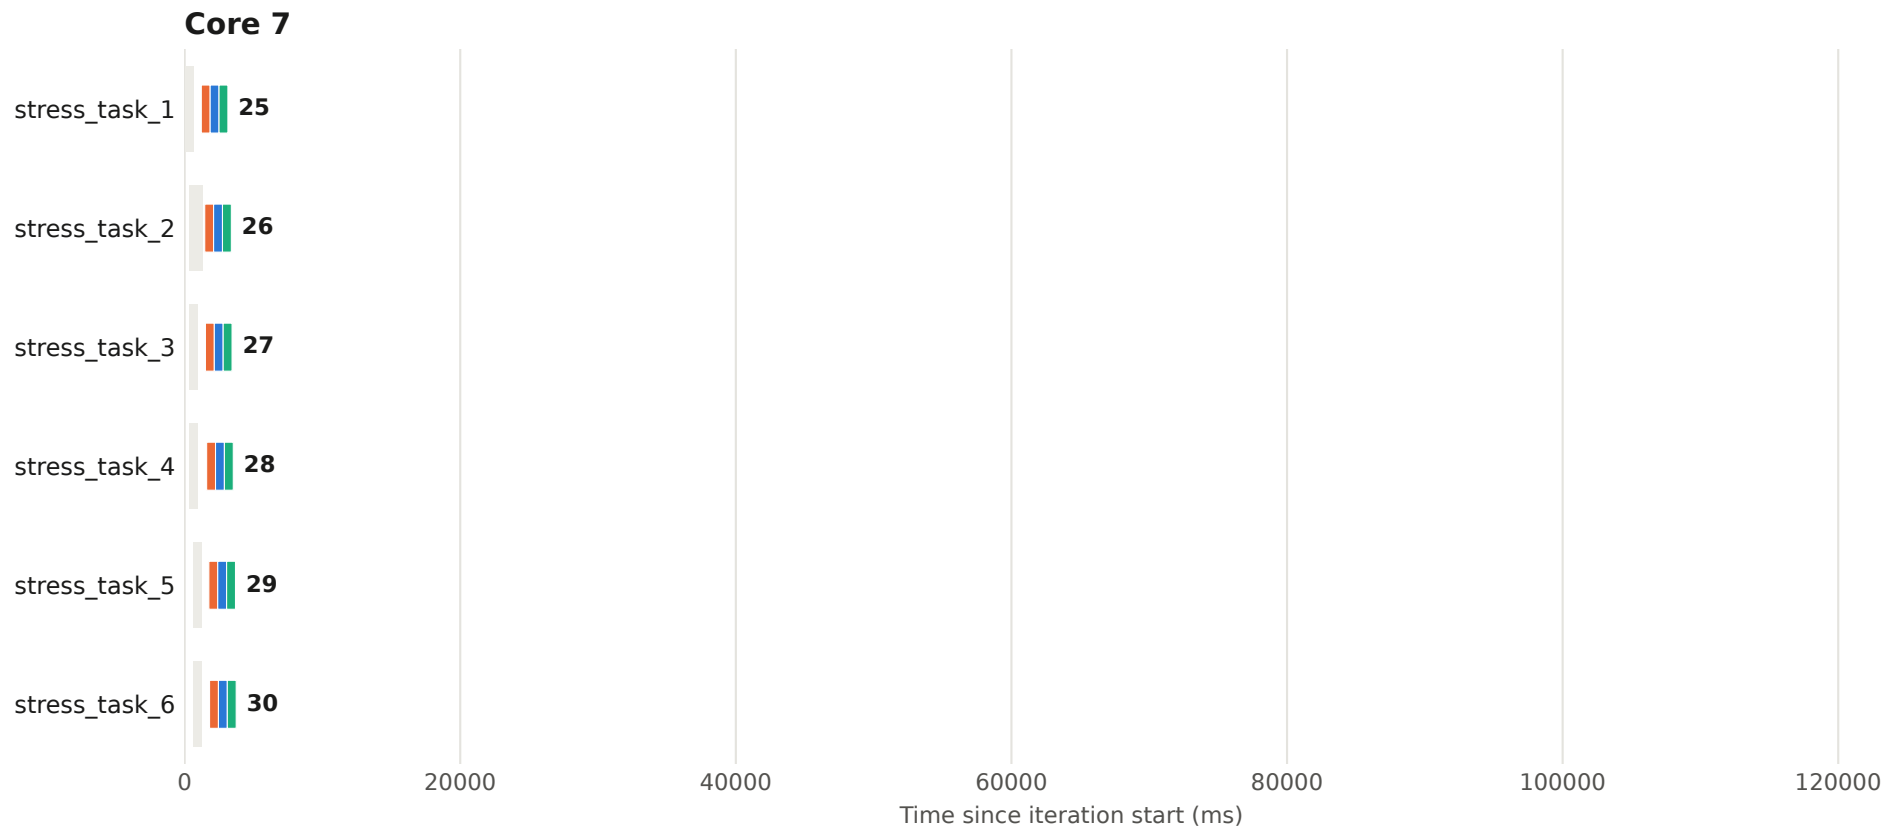


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 75 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

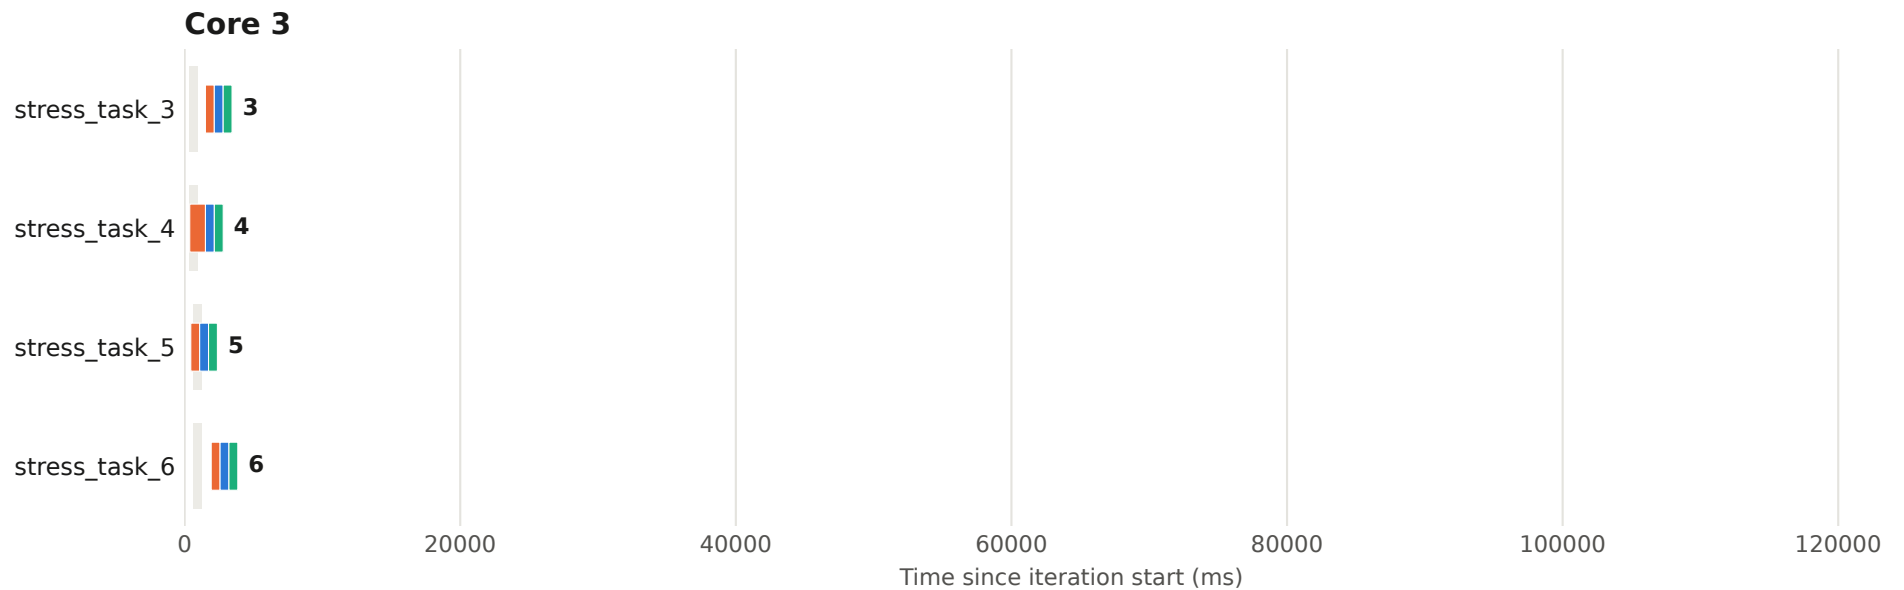


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 75 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

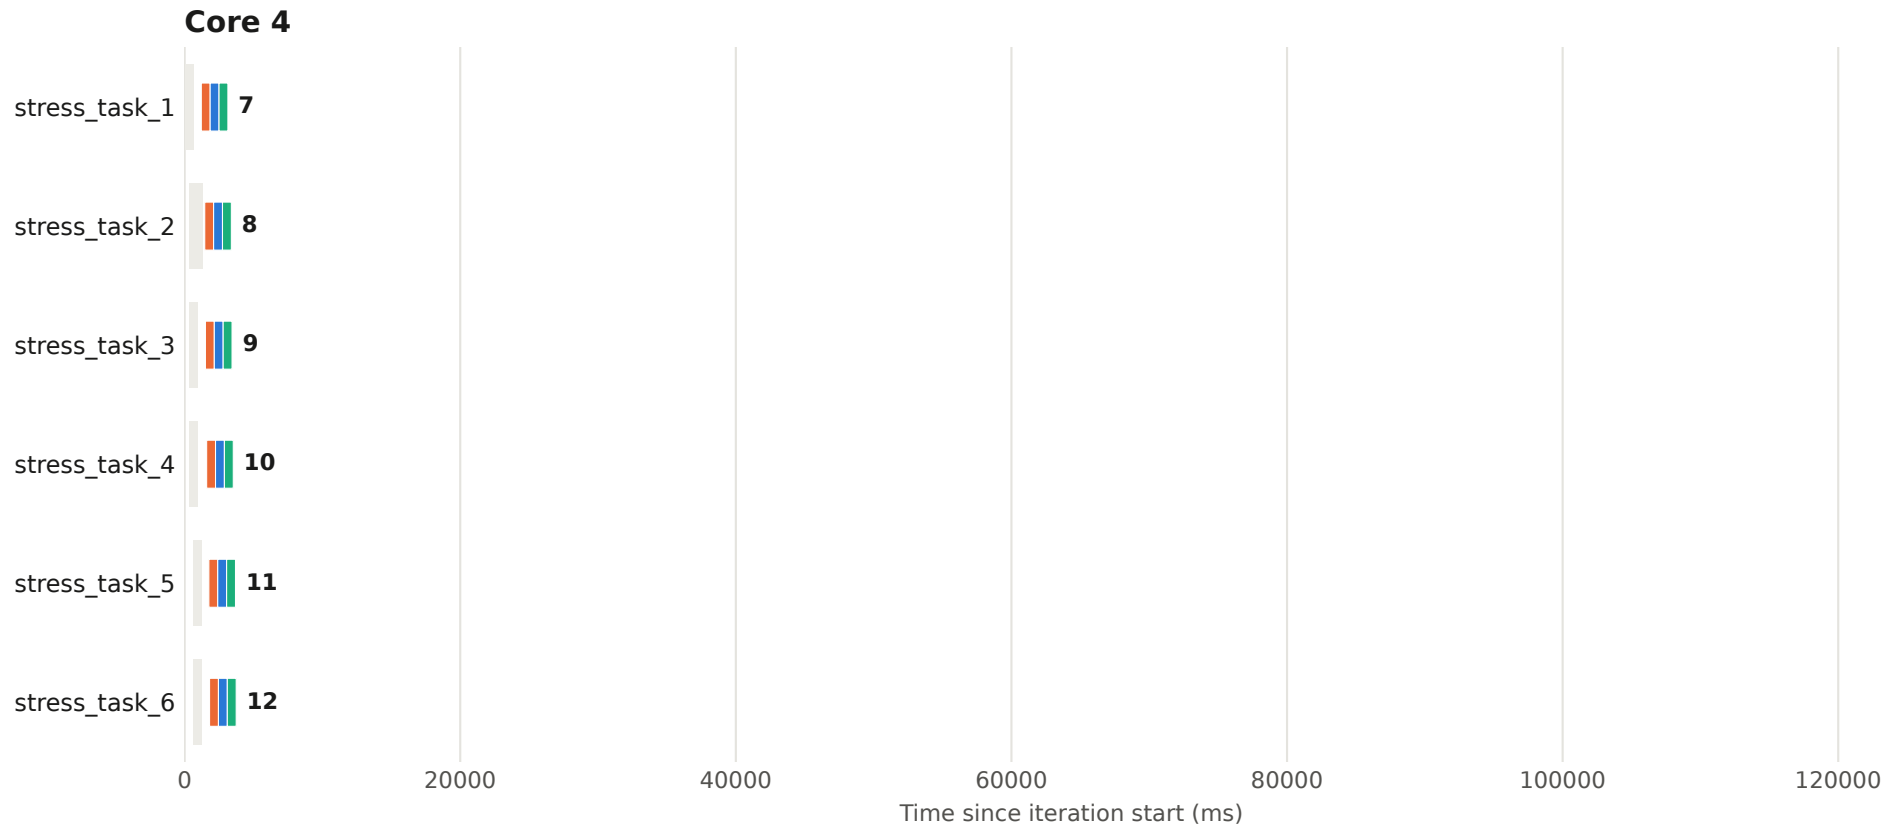


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 75 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

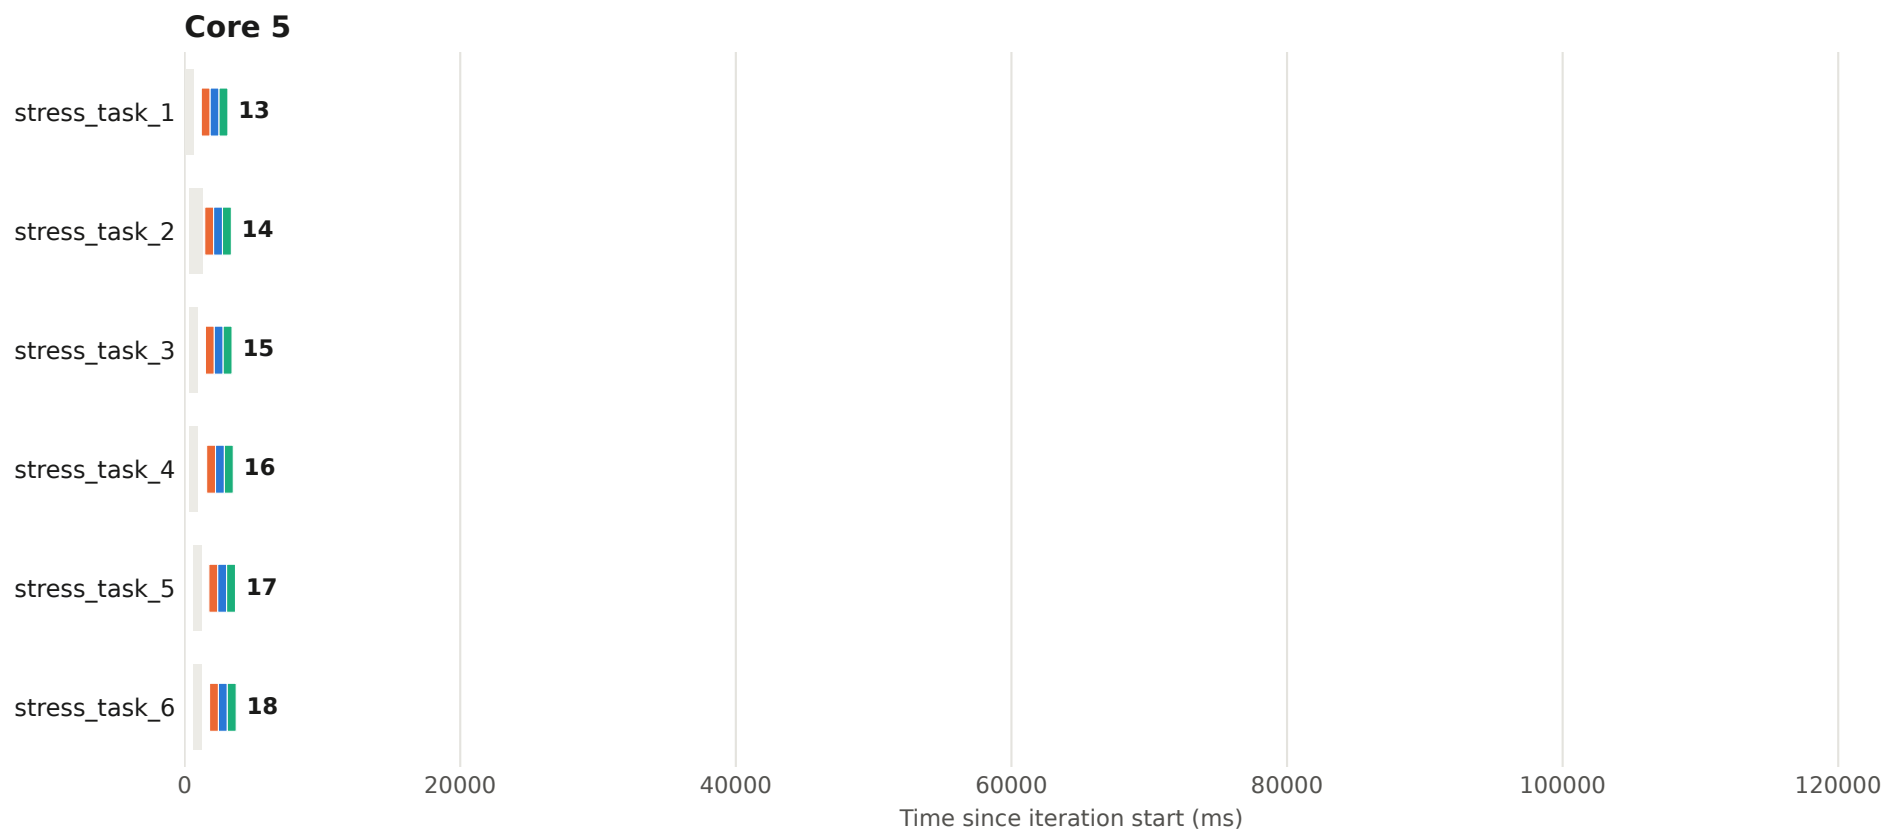


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 75 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

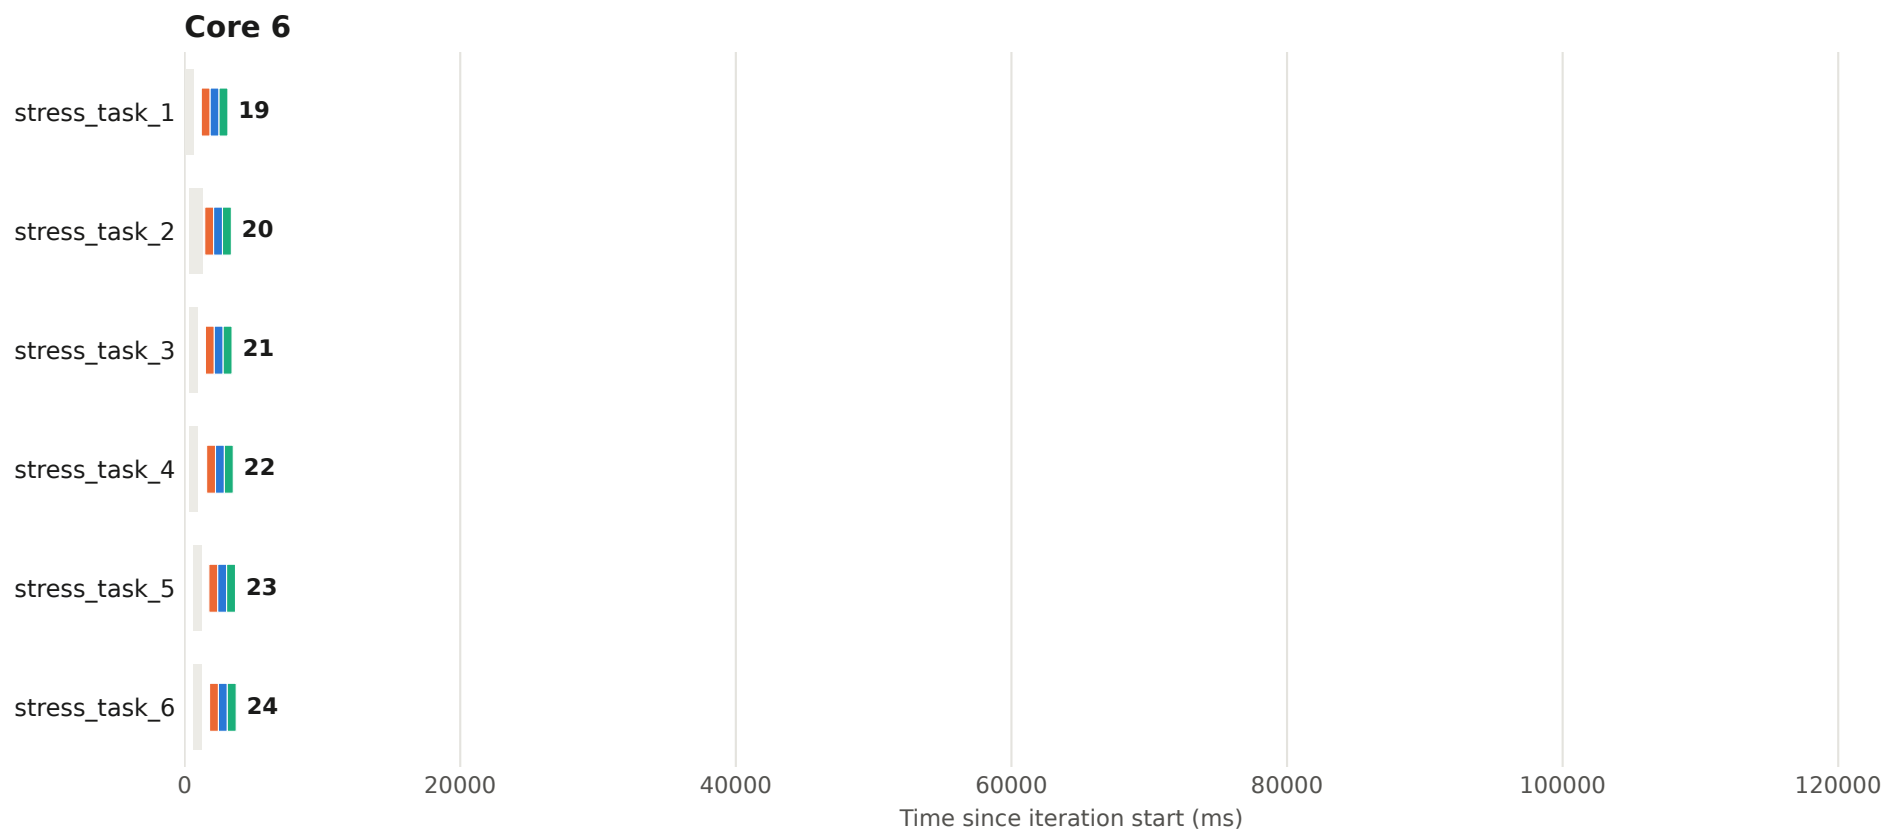


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 75 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

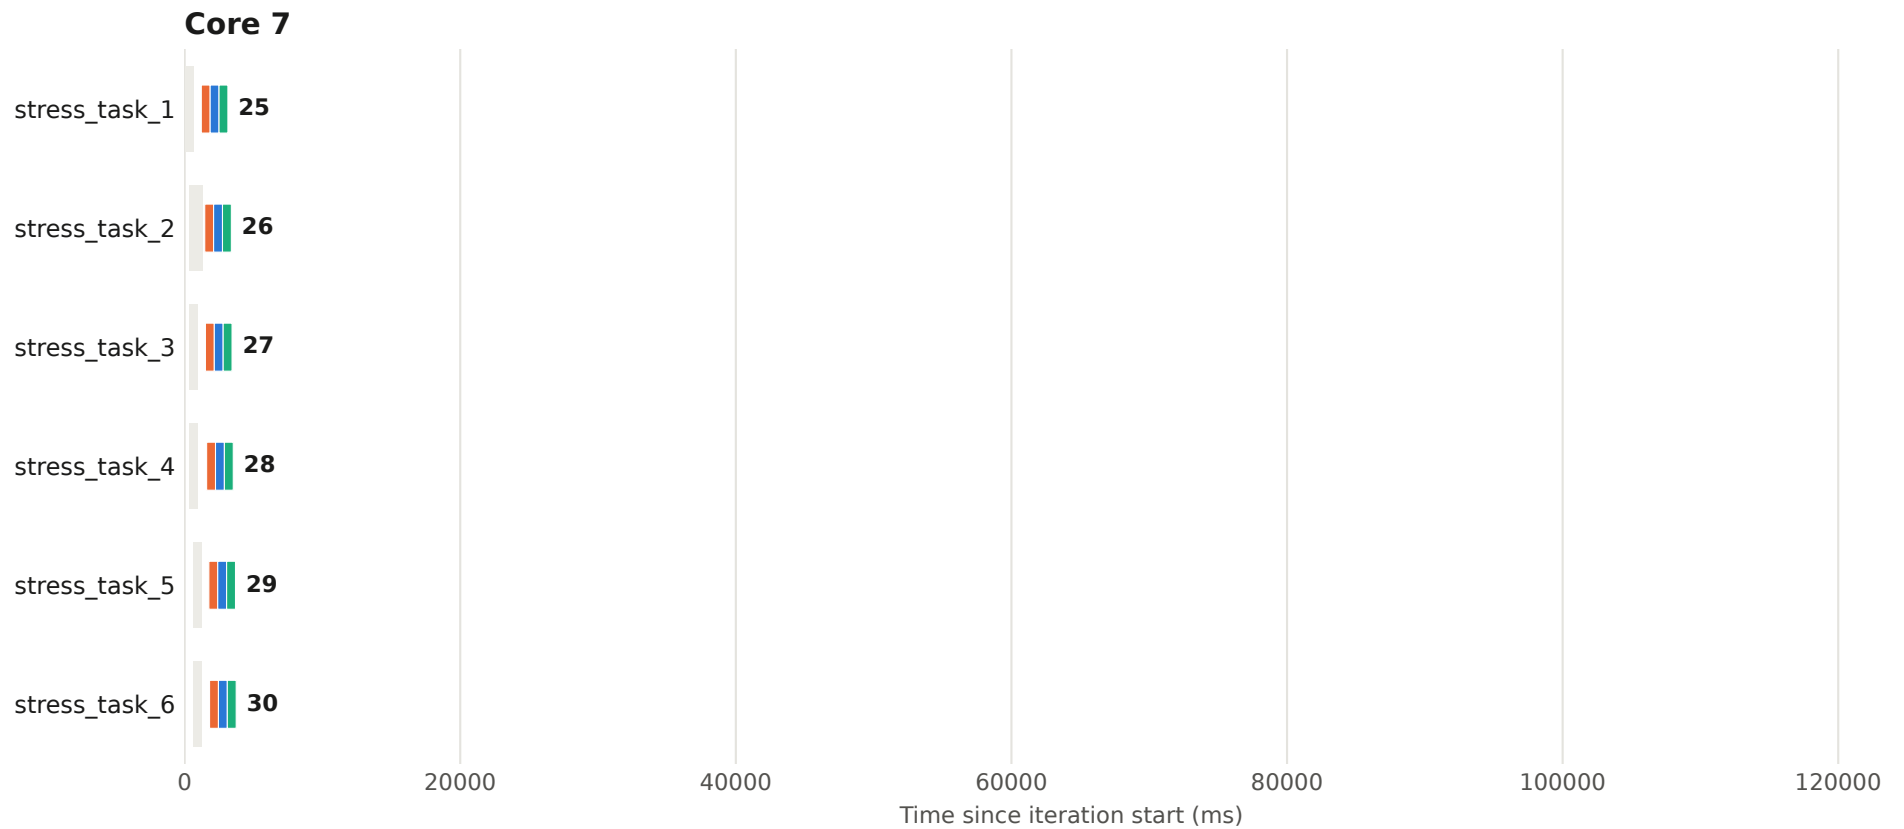


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 76 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

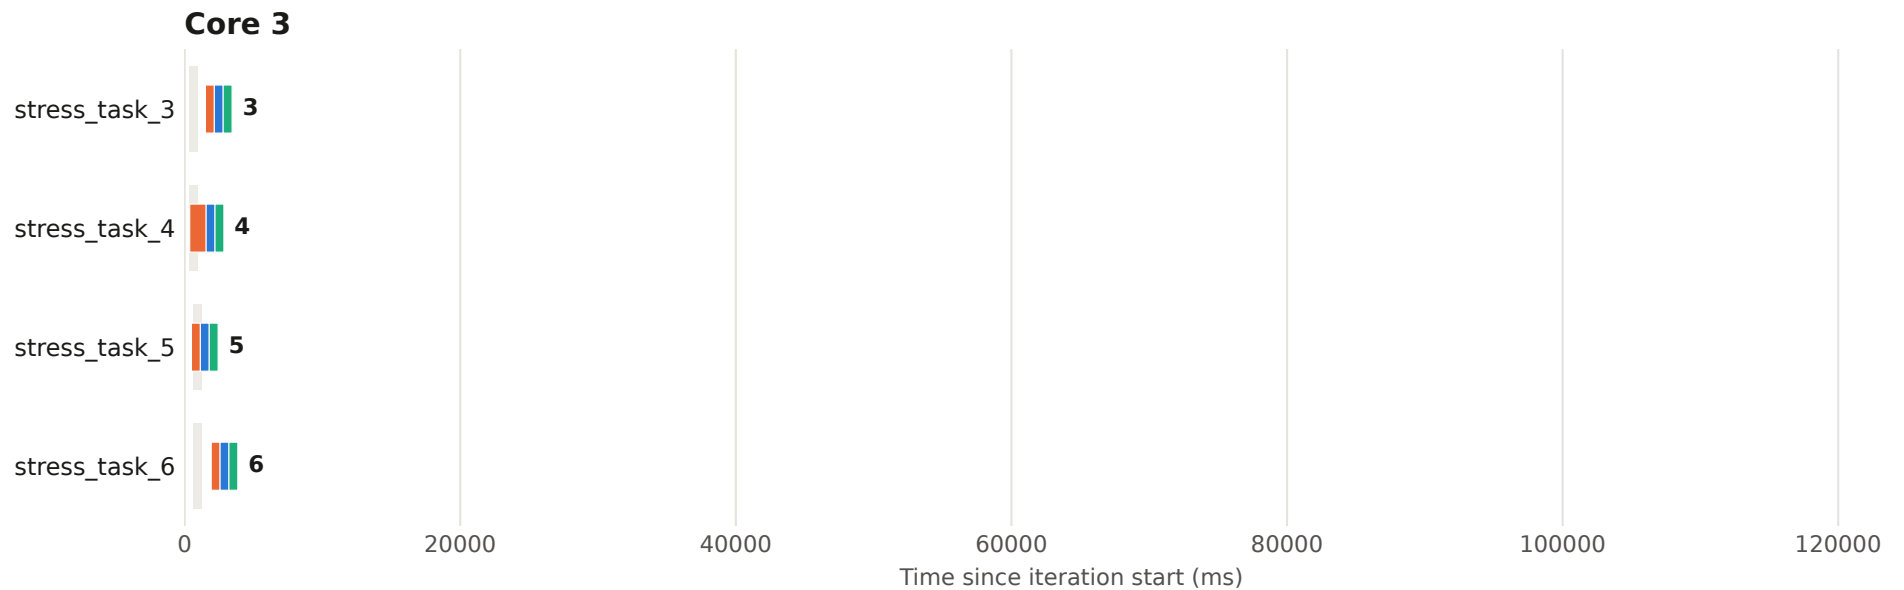


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 76 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

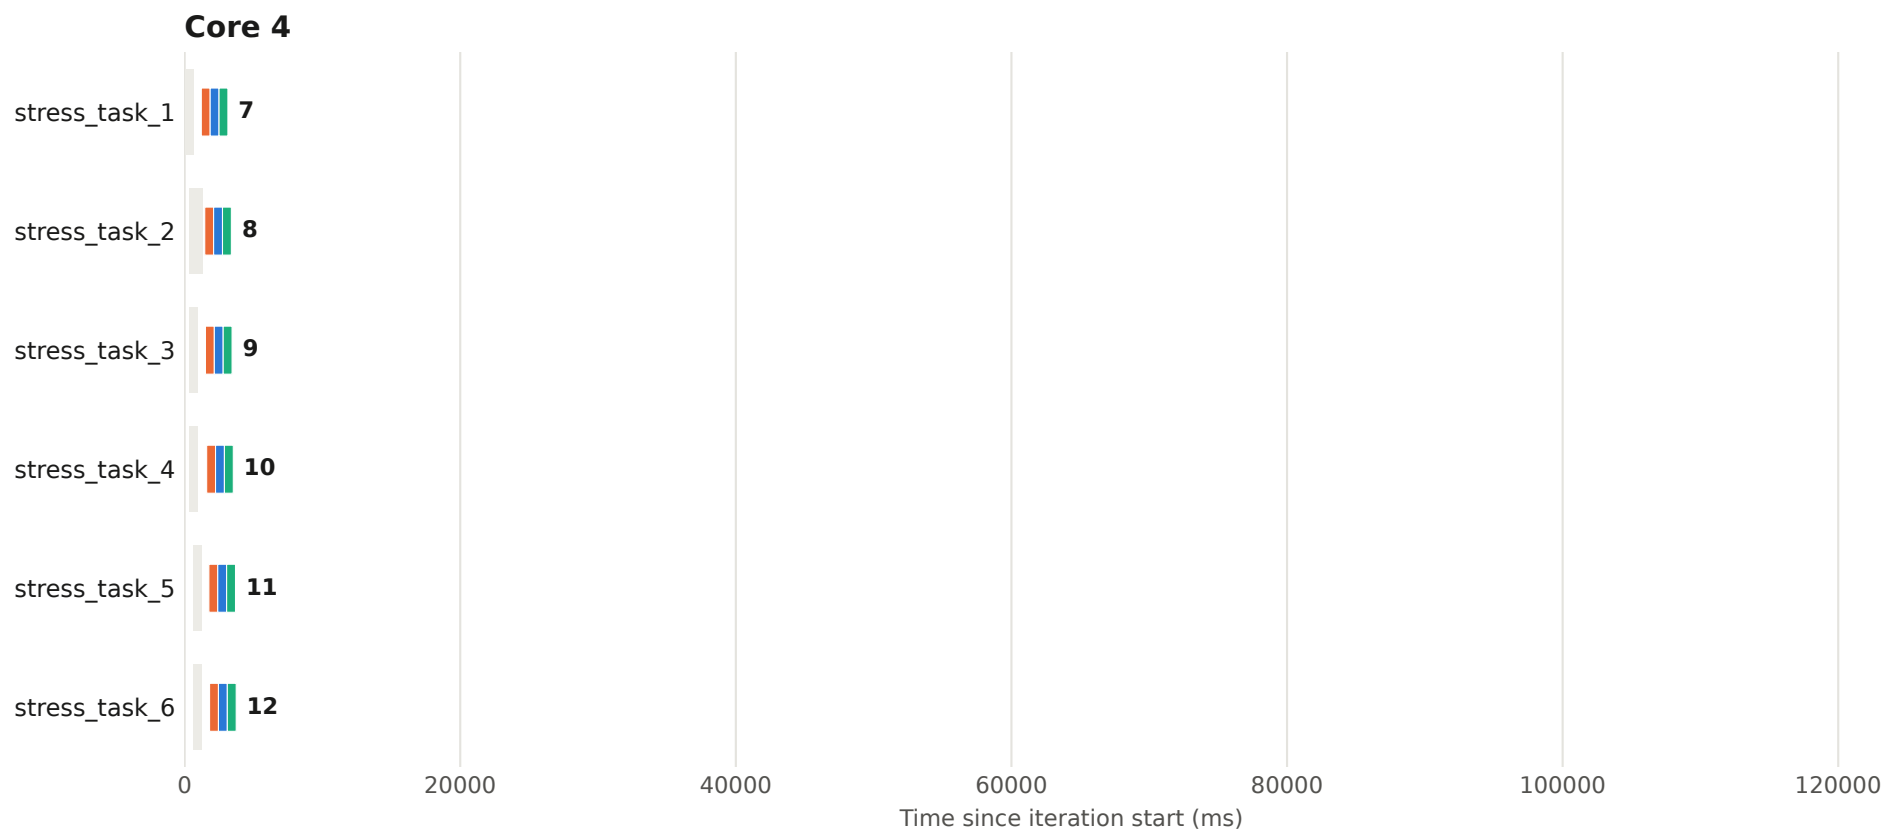


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 76 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

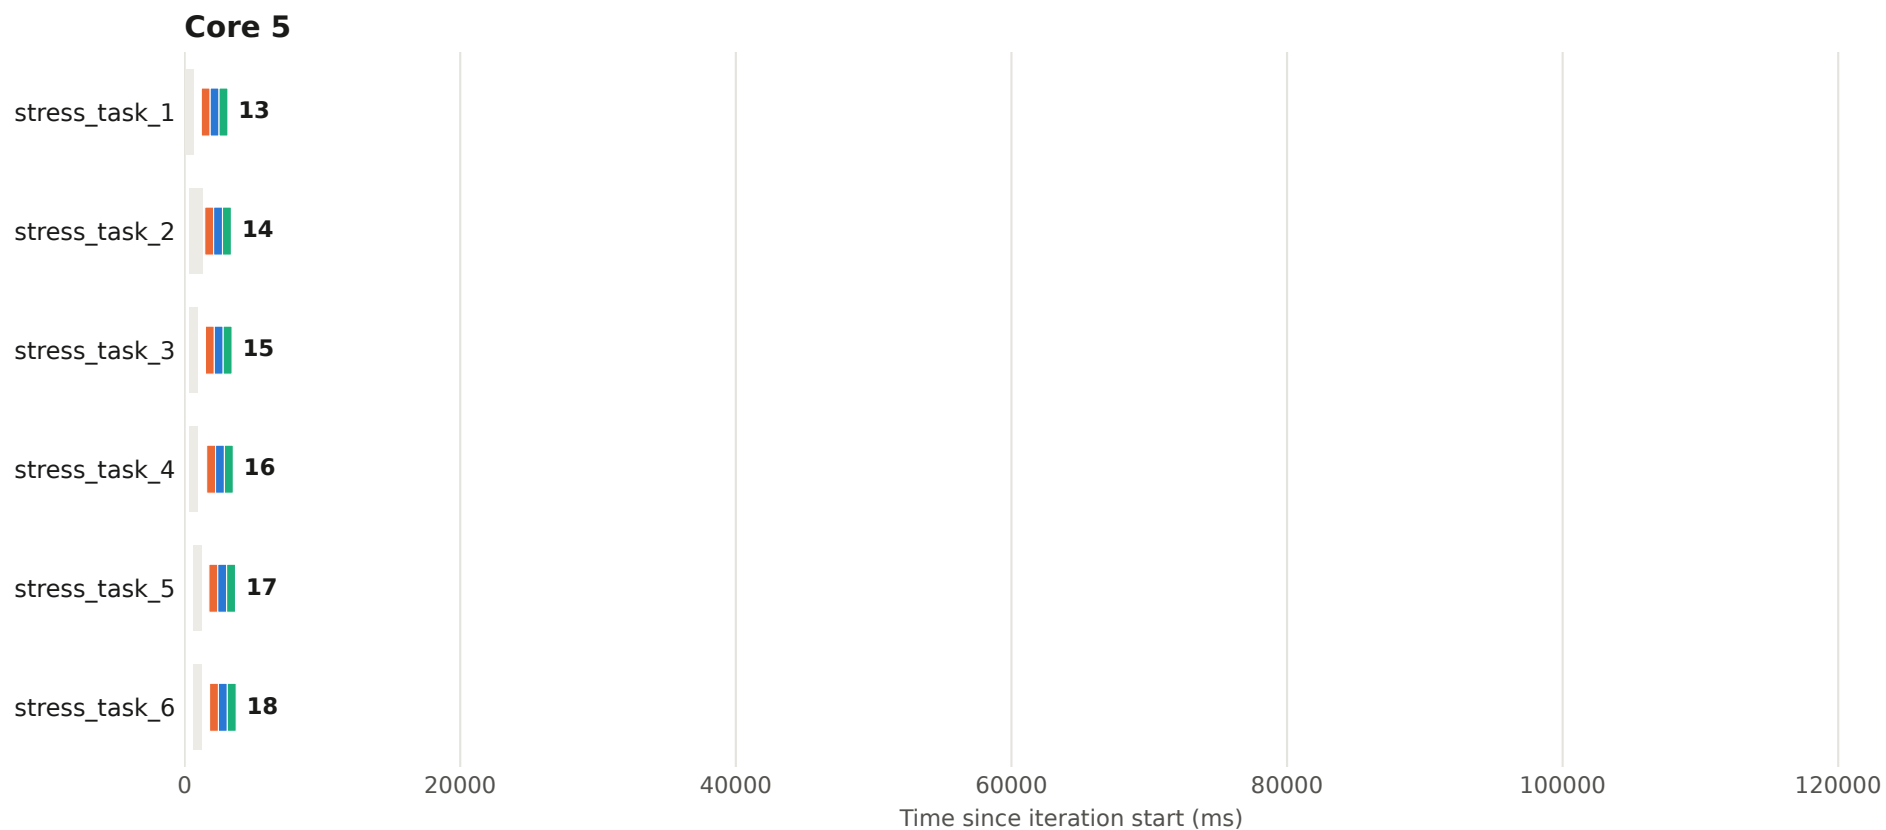


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 76 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

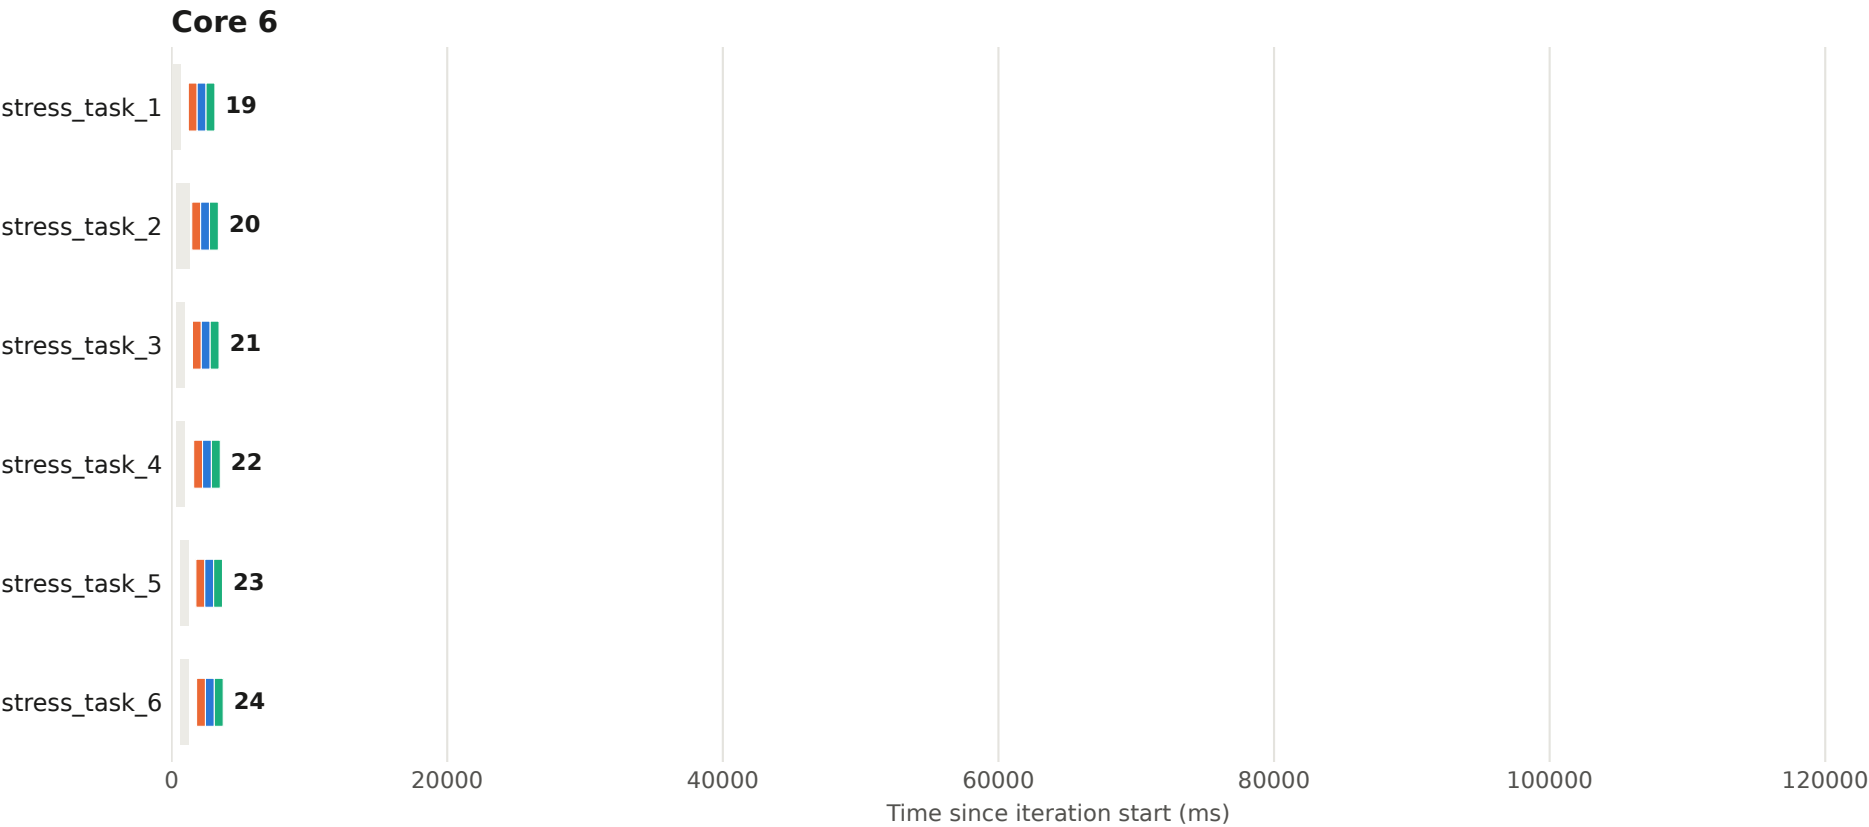


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 76 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

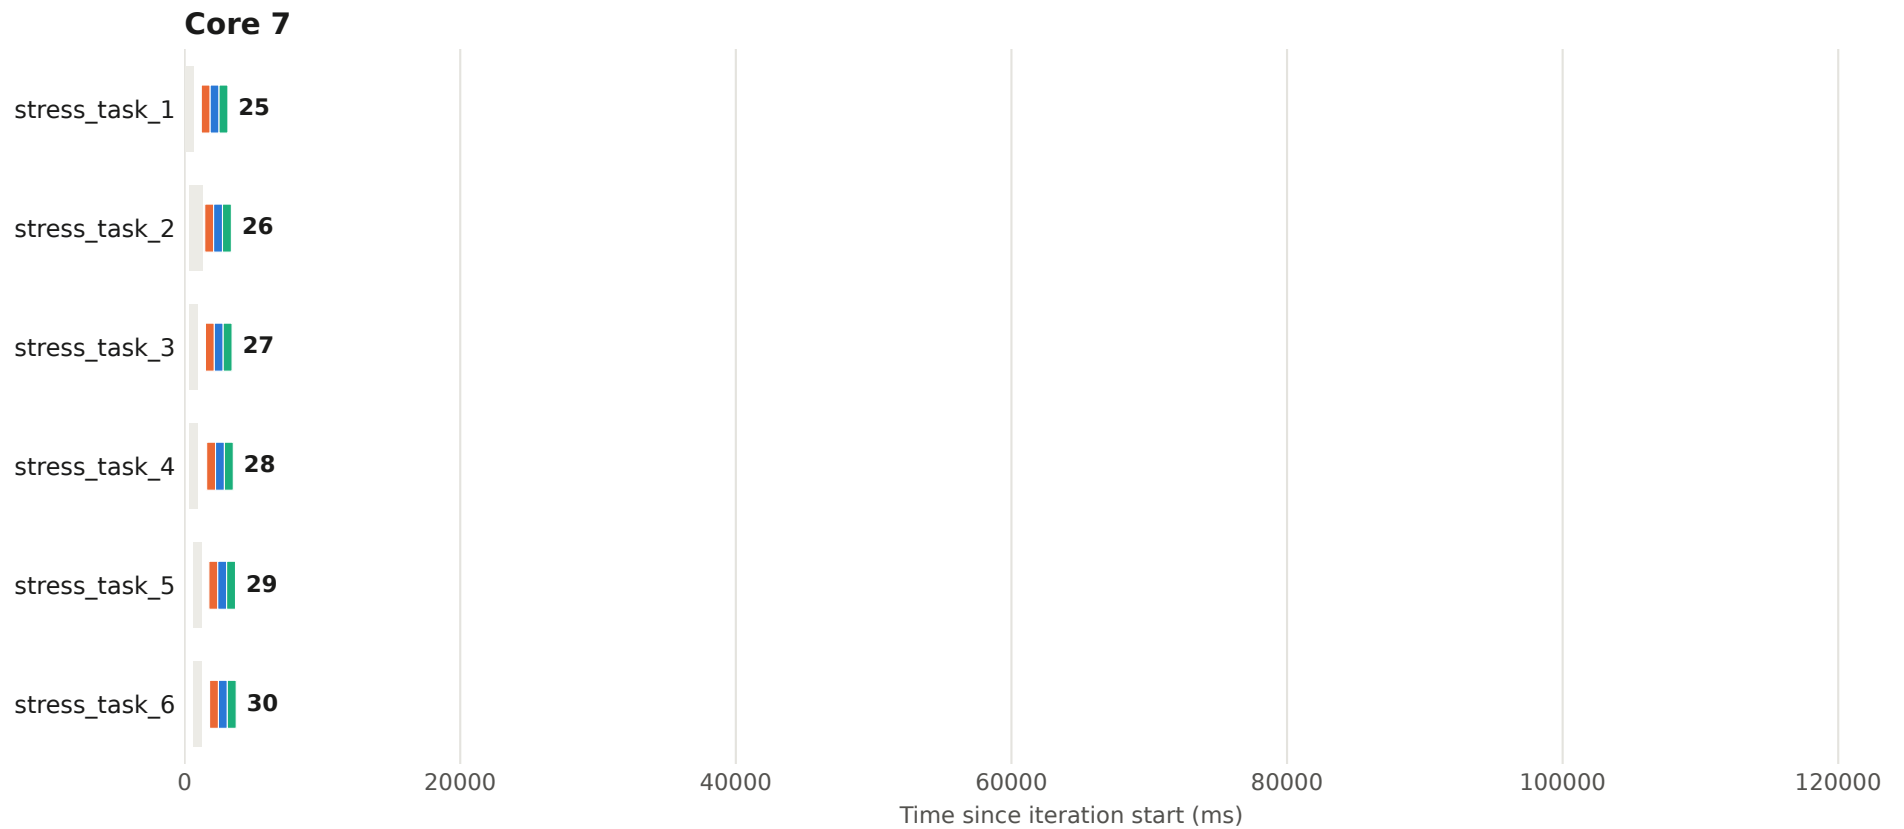


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 77 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

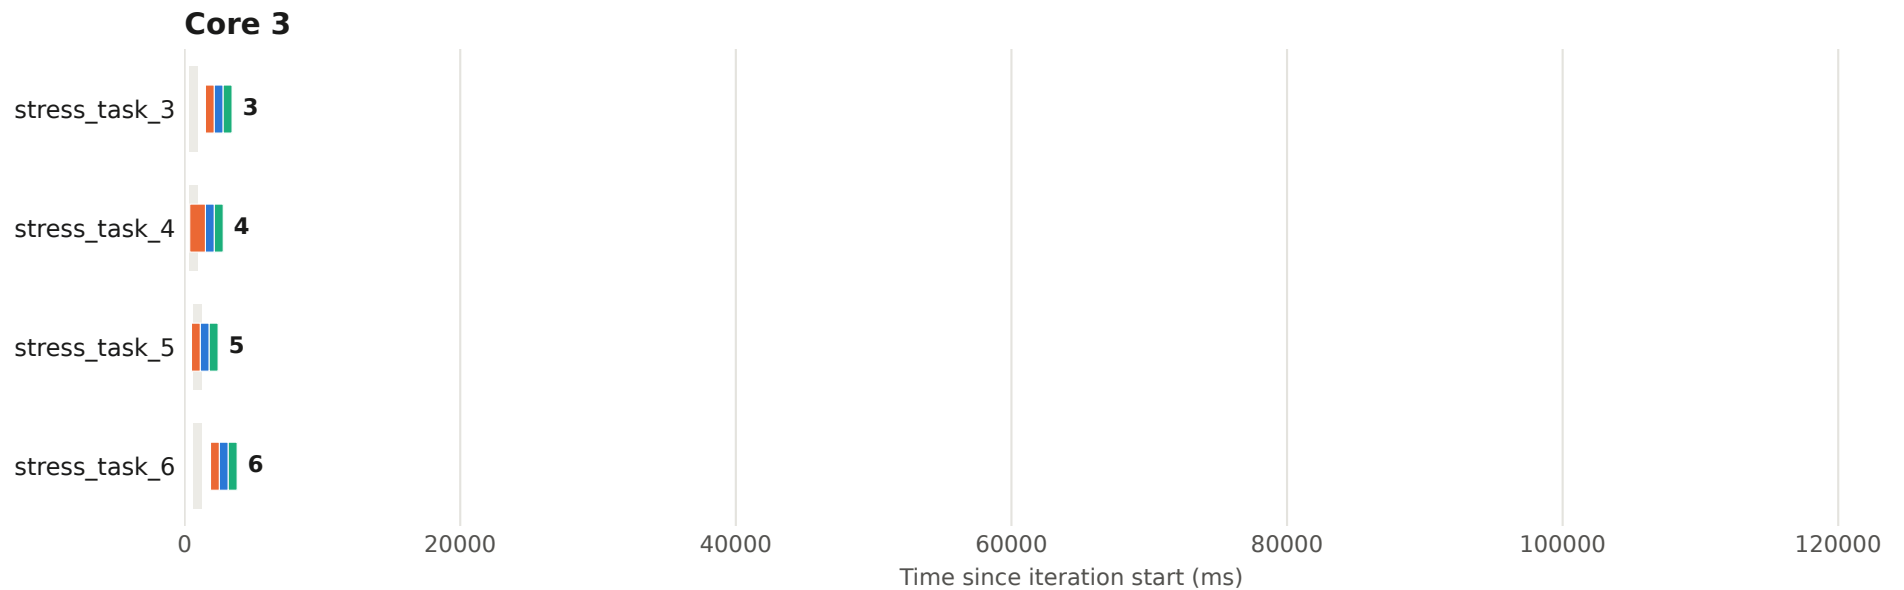


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 77 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

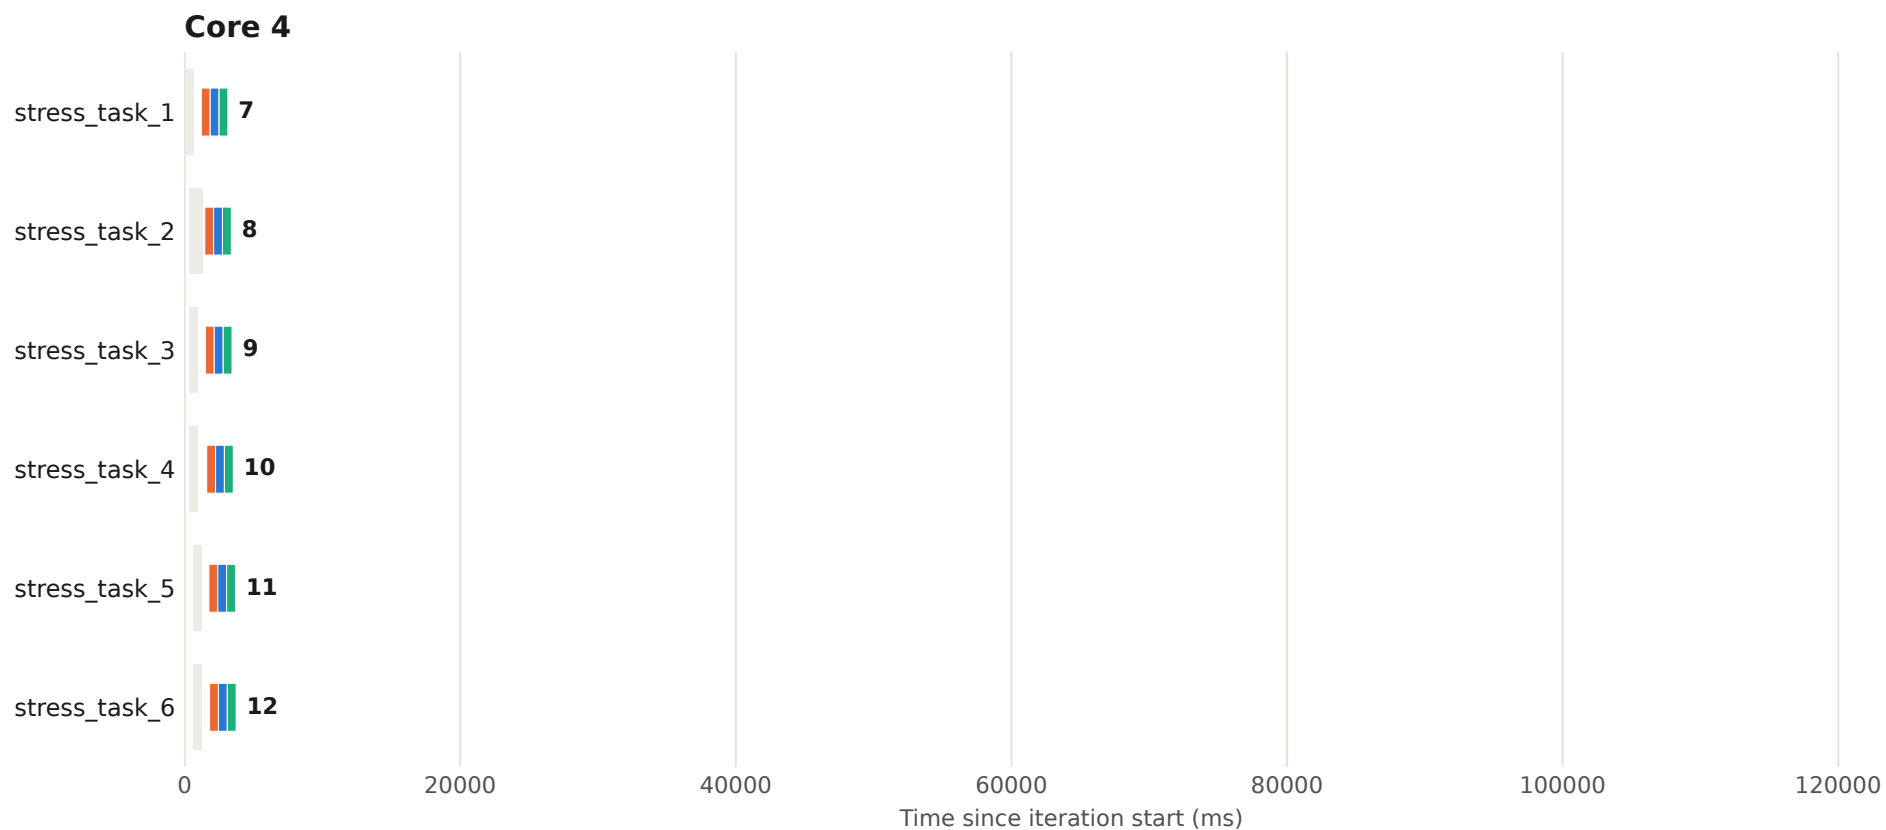


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 77 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

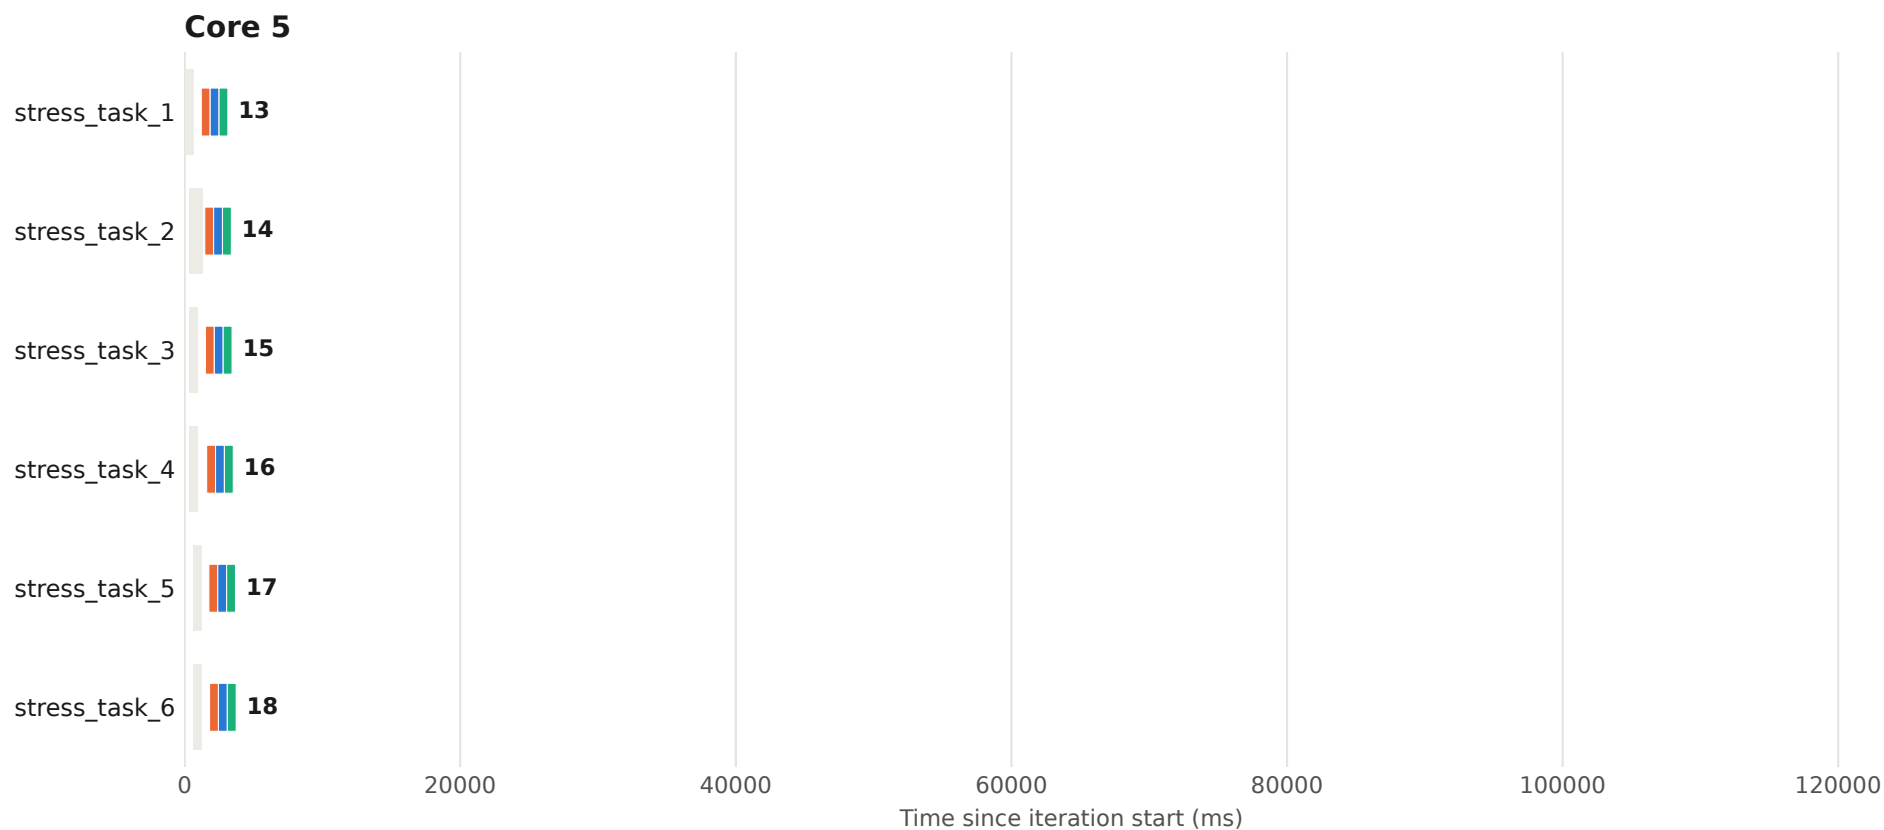


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 77 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

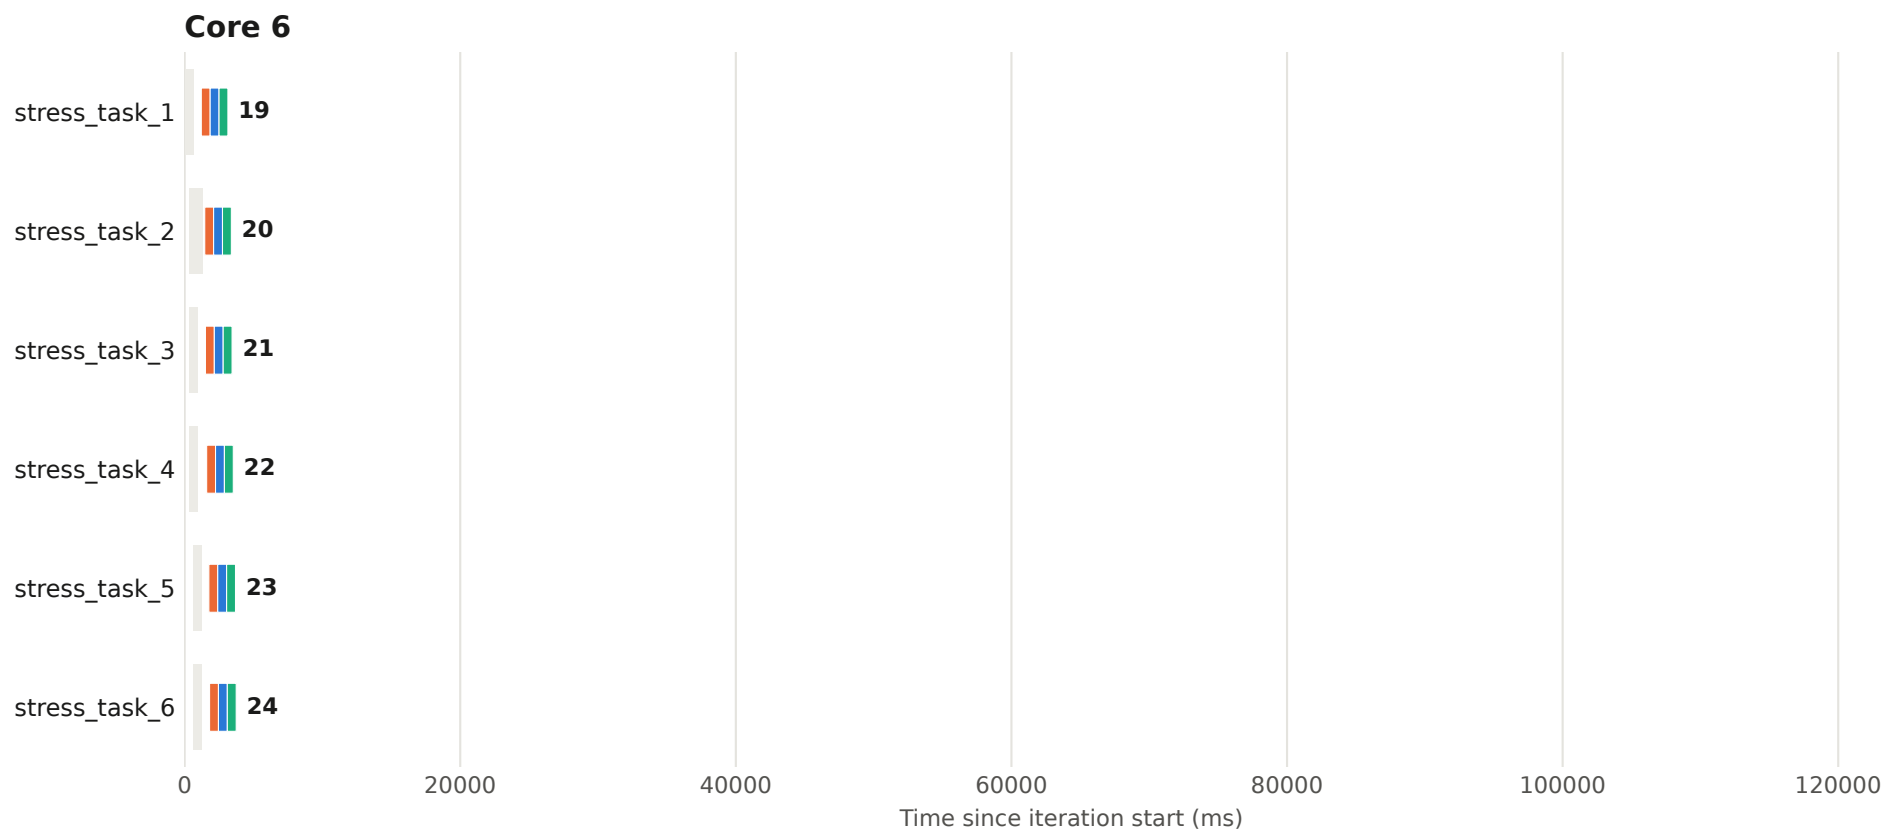


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 77 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

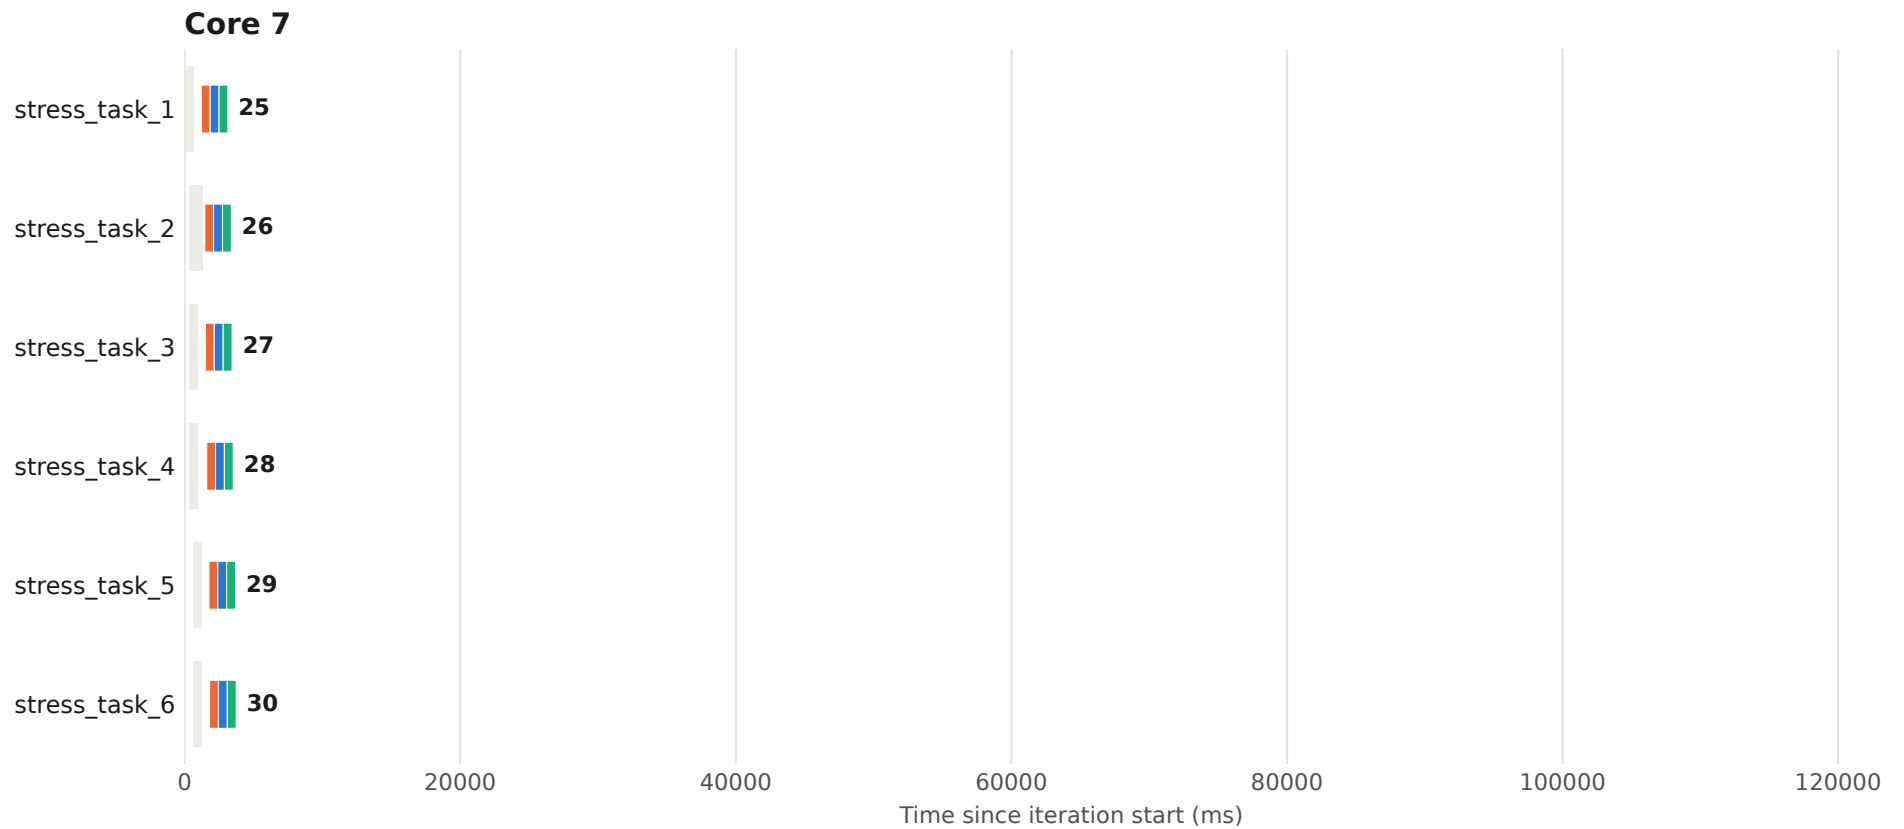


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 78 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

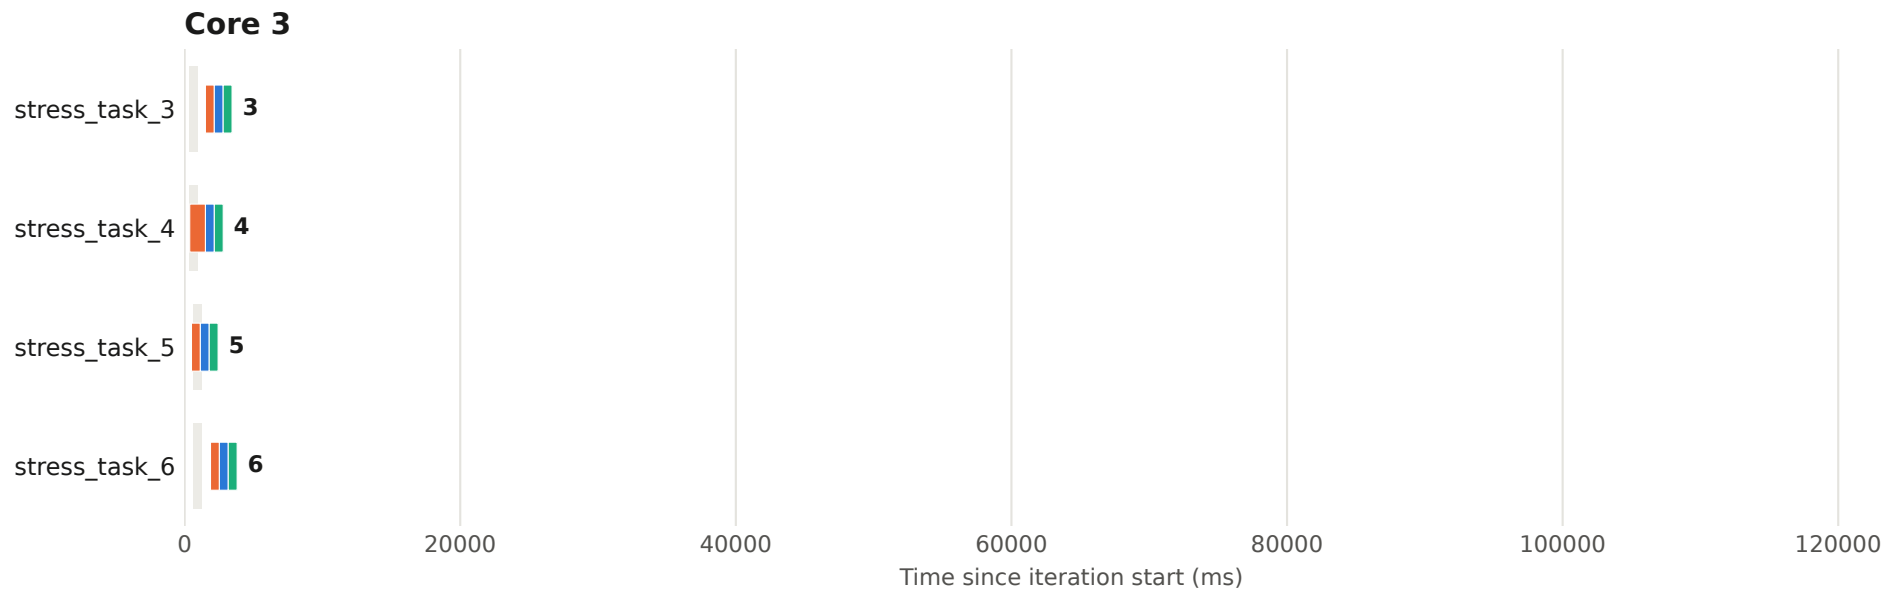

Execution plan - iteration 78 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

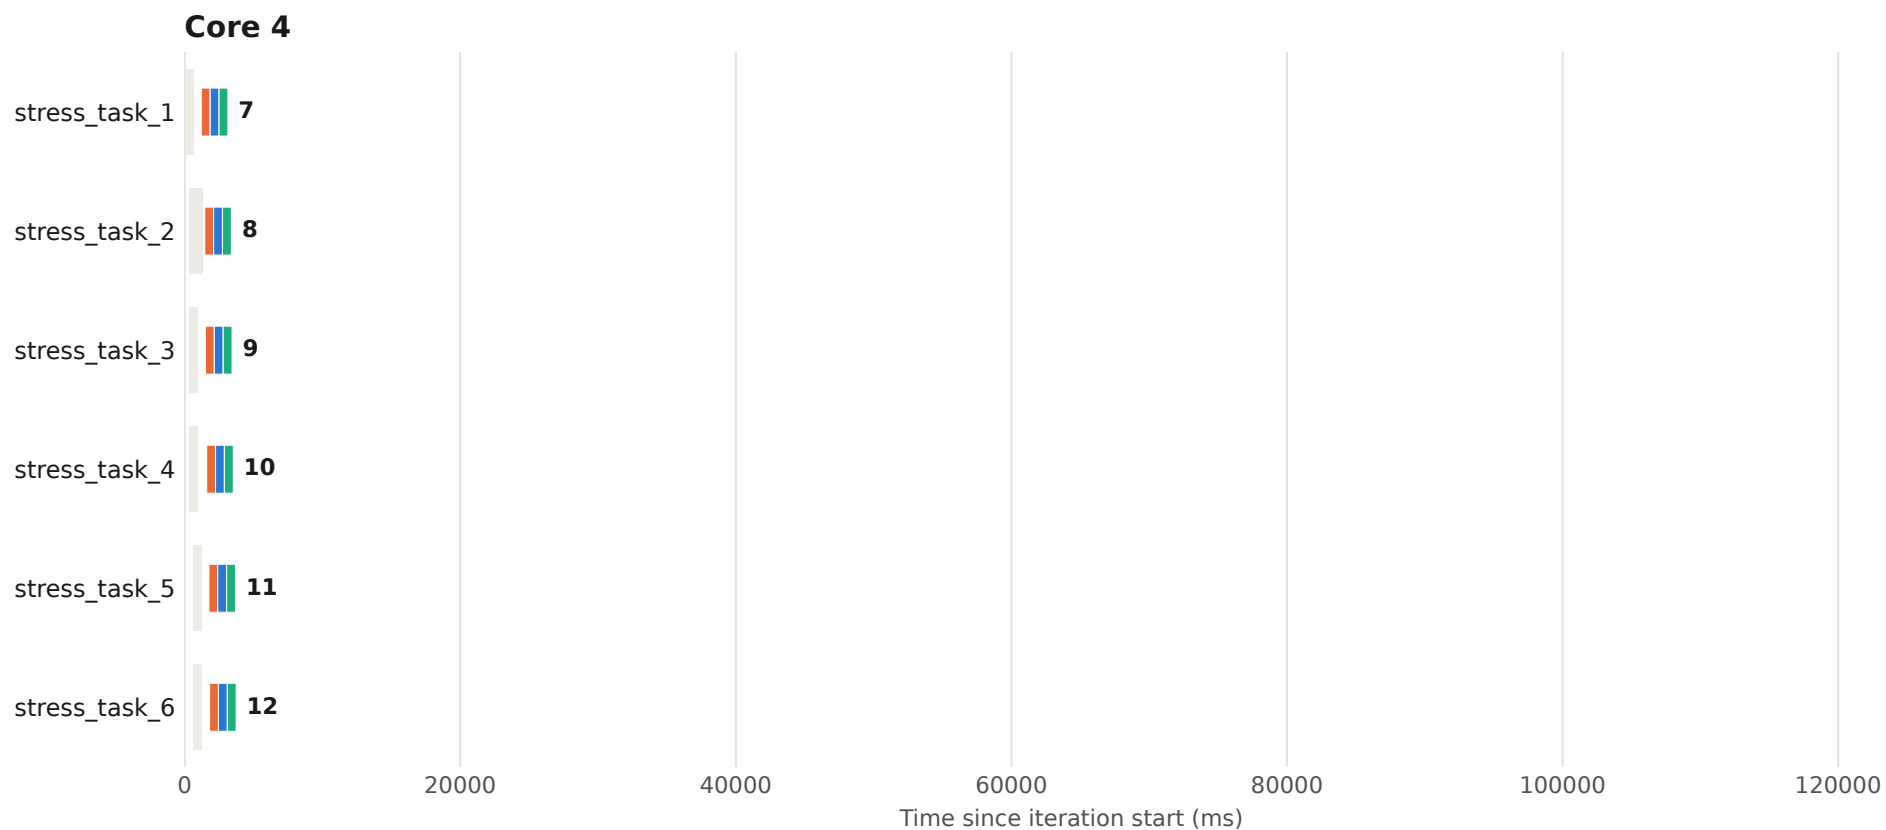


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 78 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

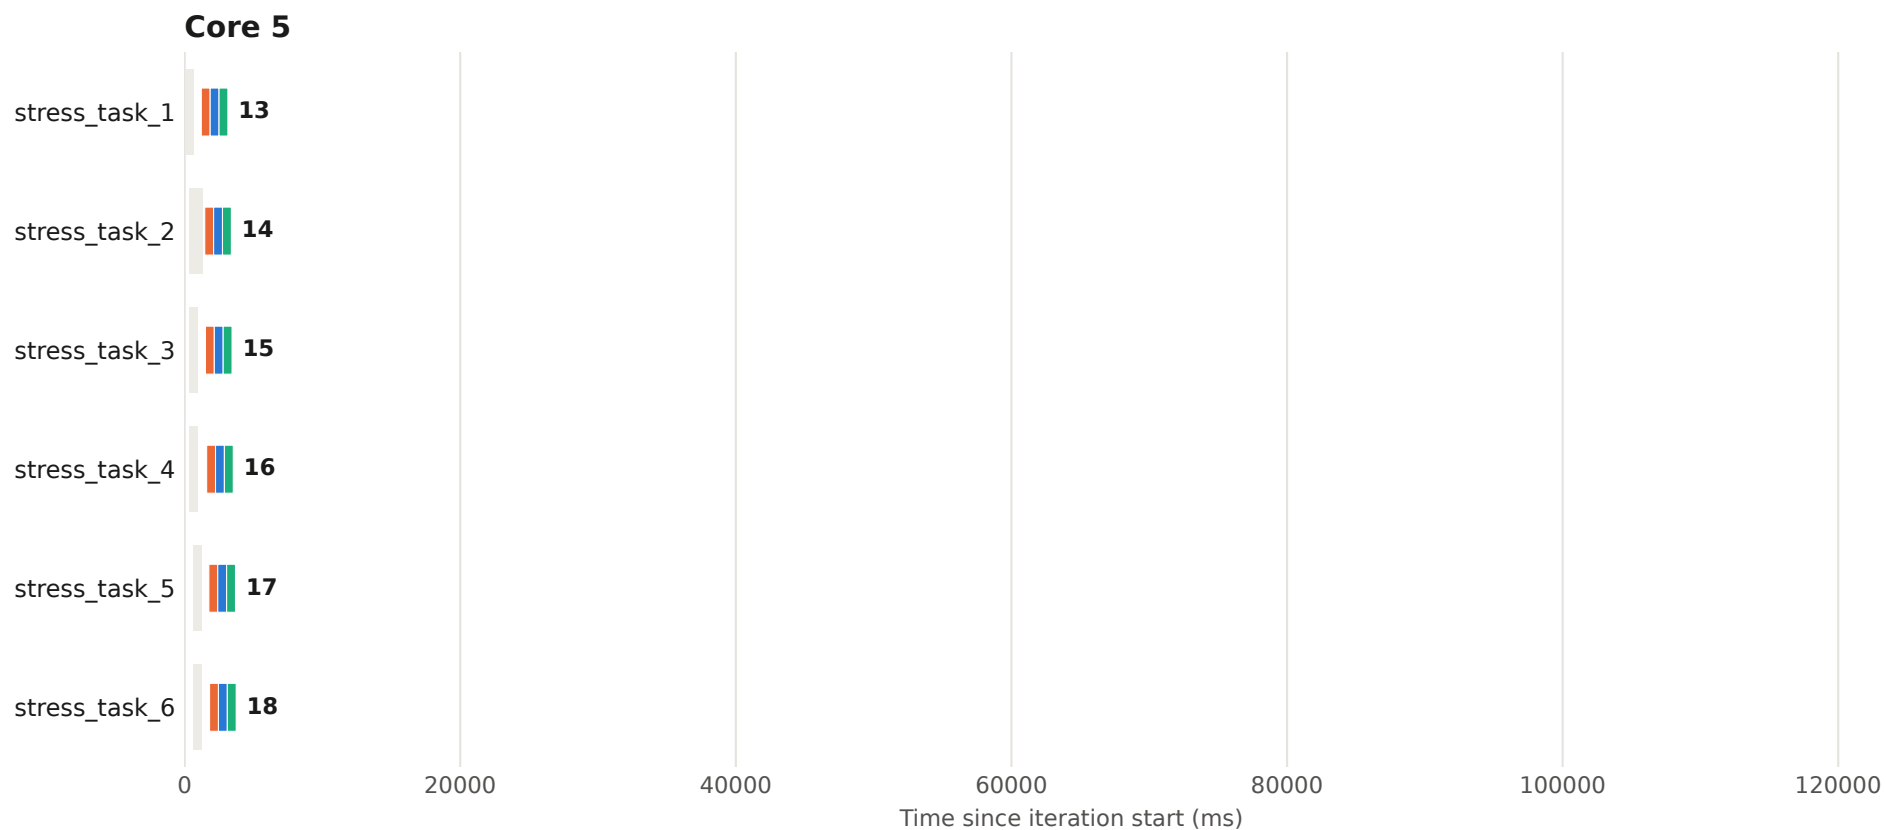


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 78 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

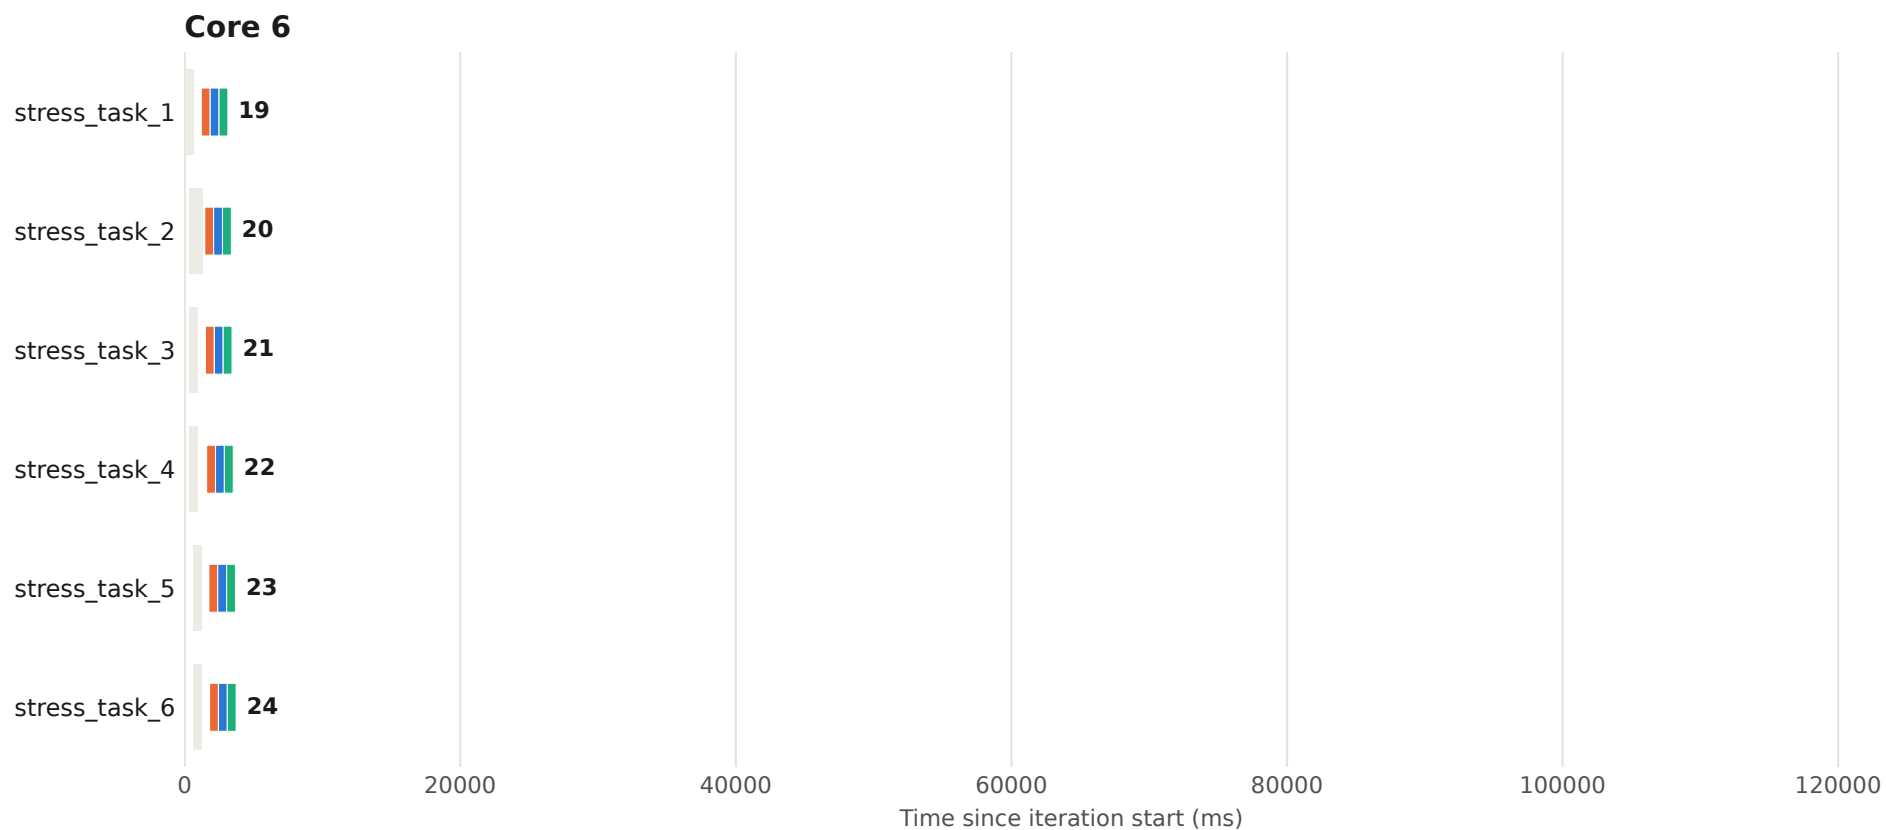


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 78 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

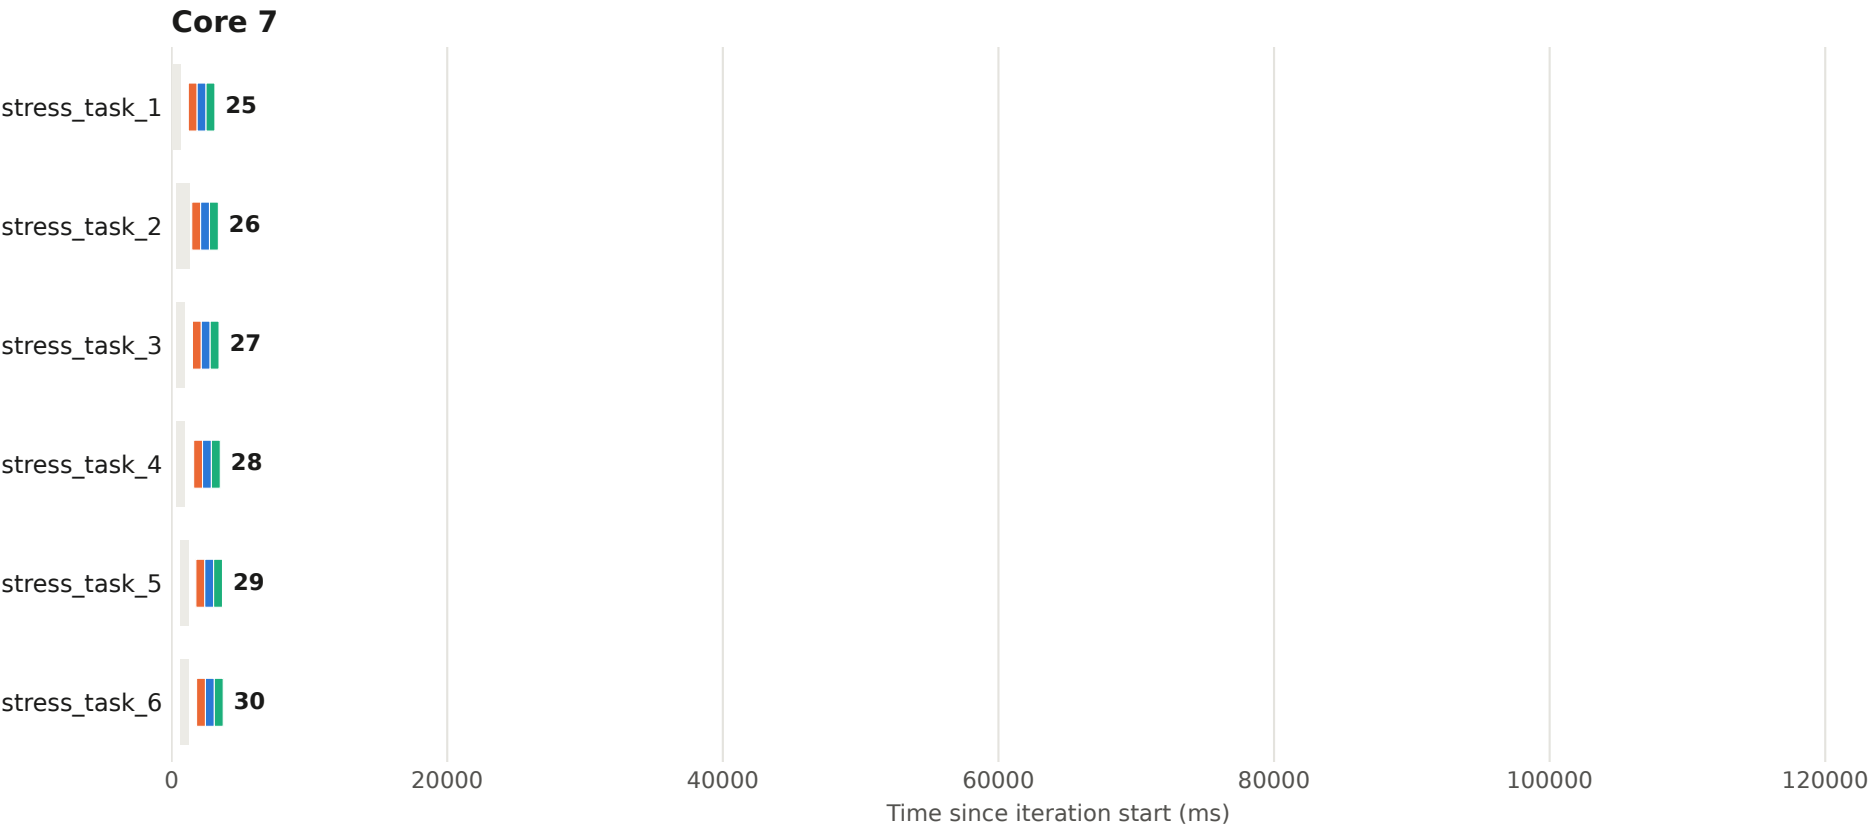


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 79 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

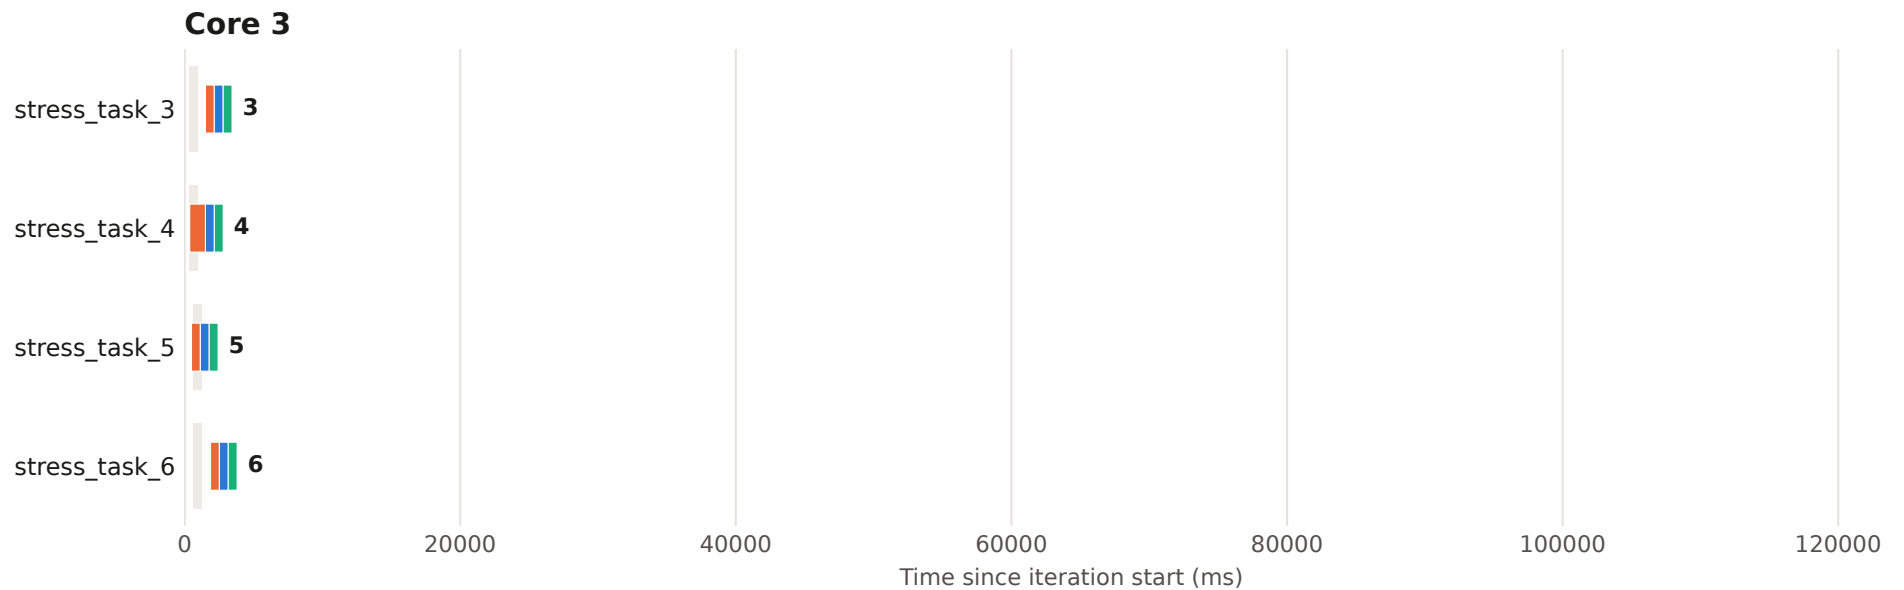


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 79 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

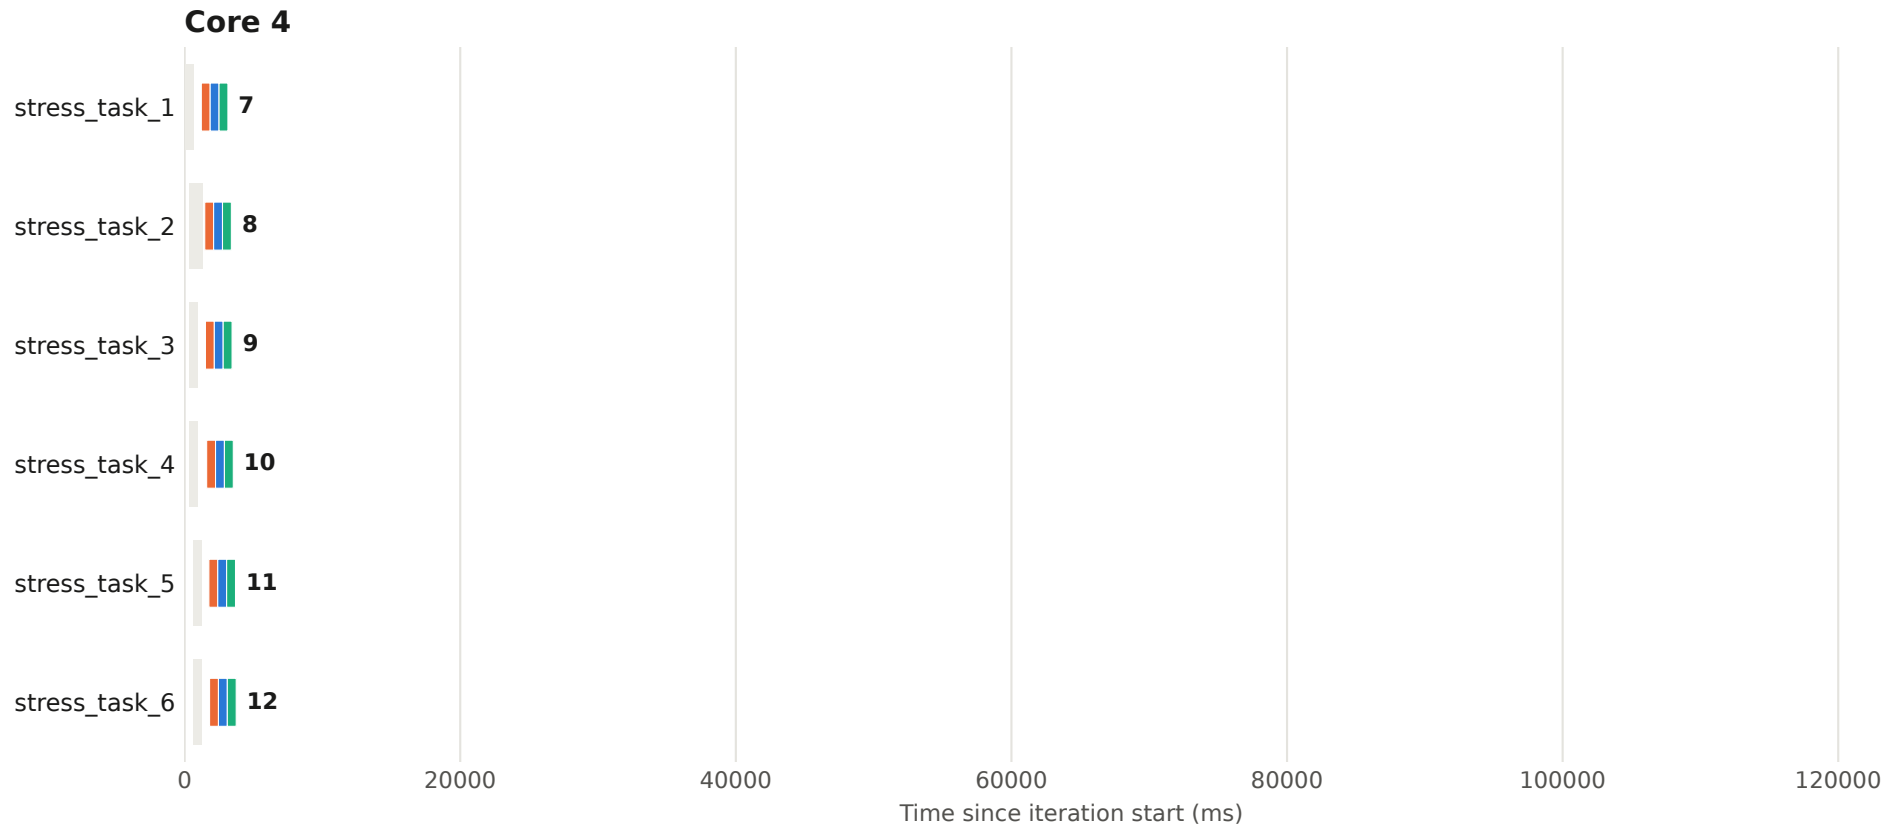


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 79 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

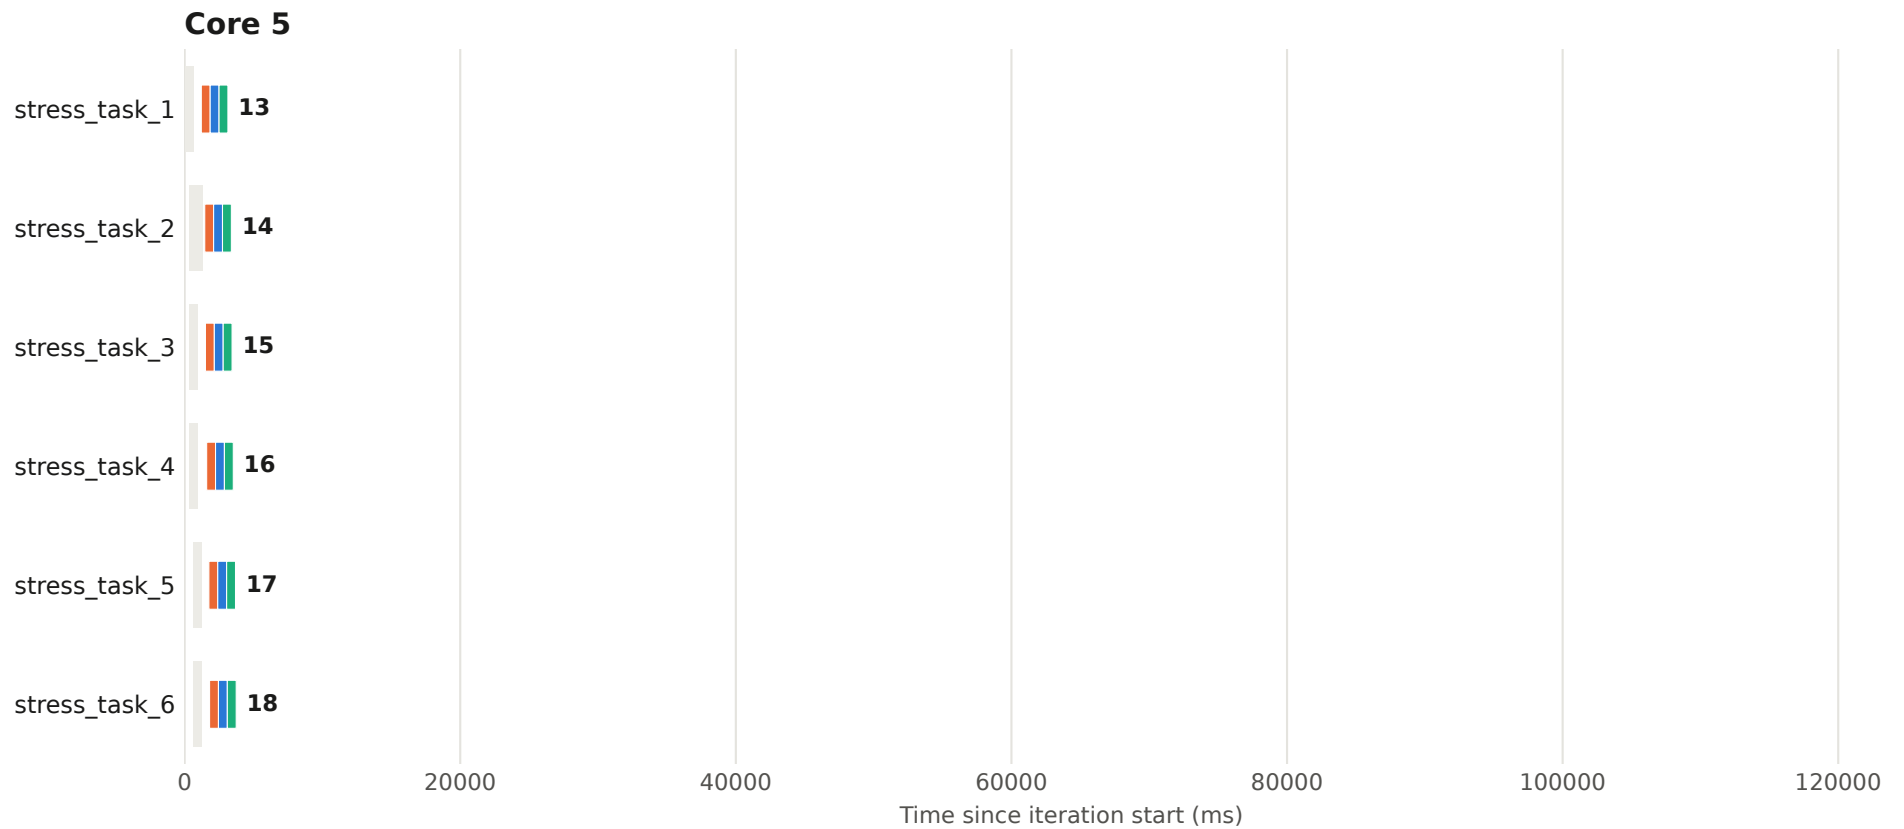


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 79 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

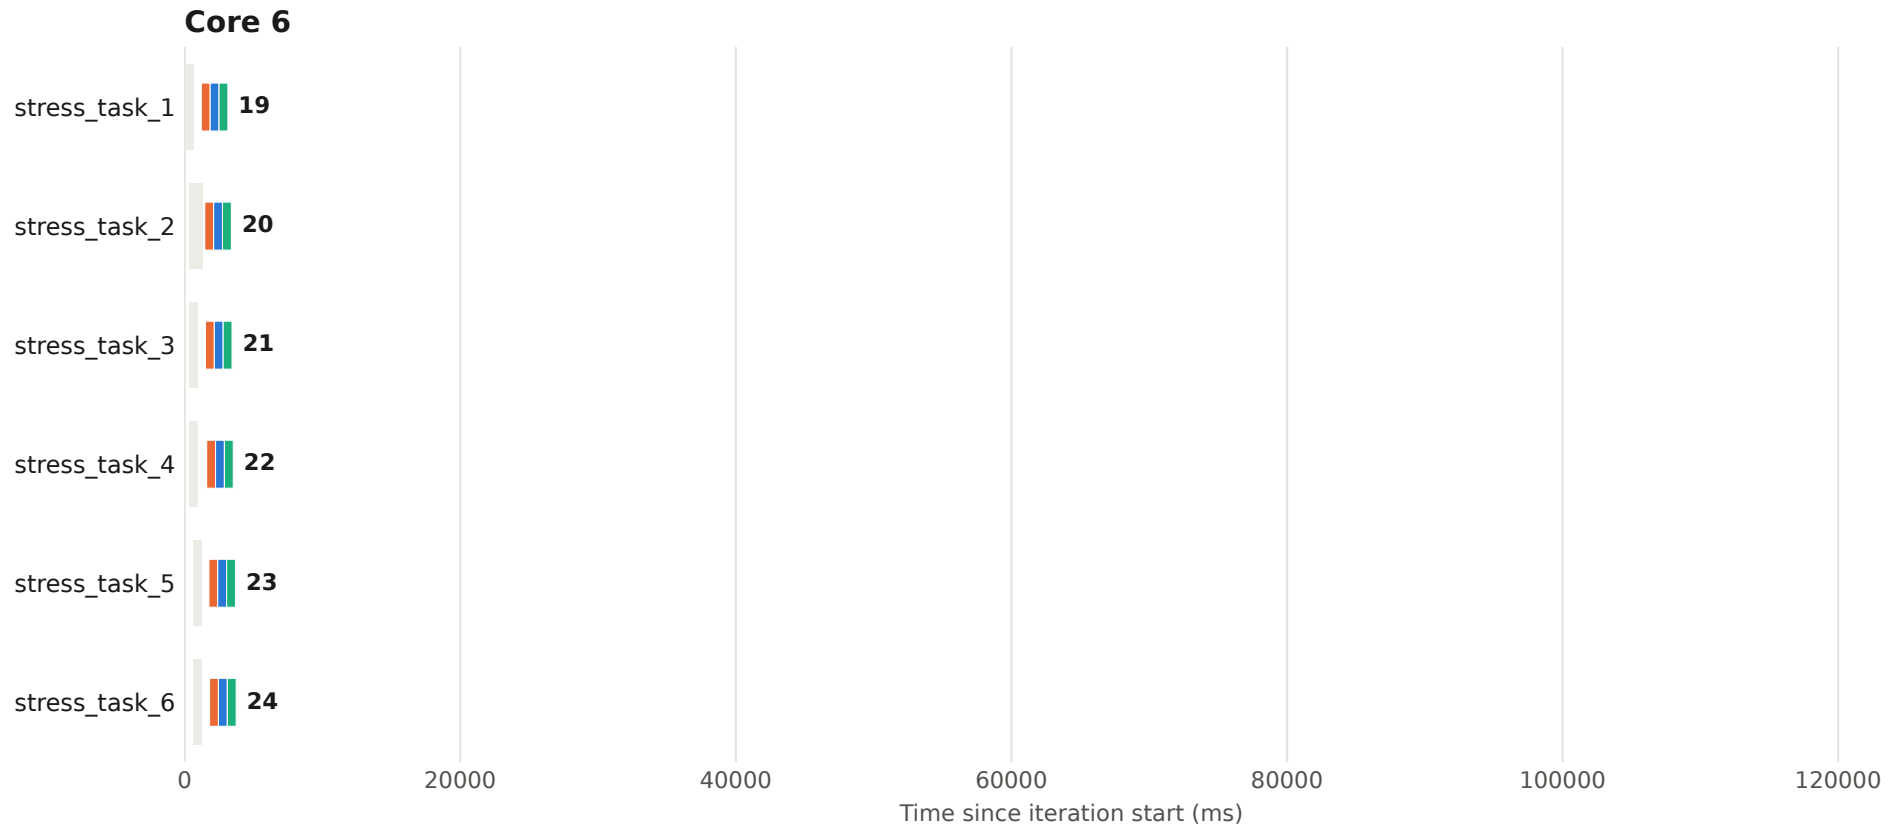


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 79 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

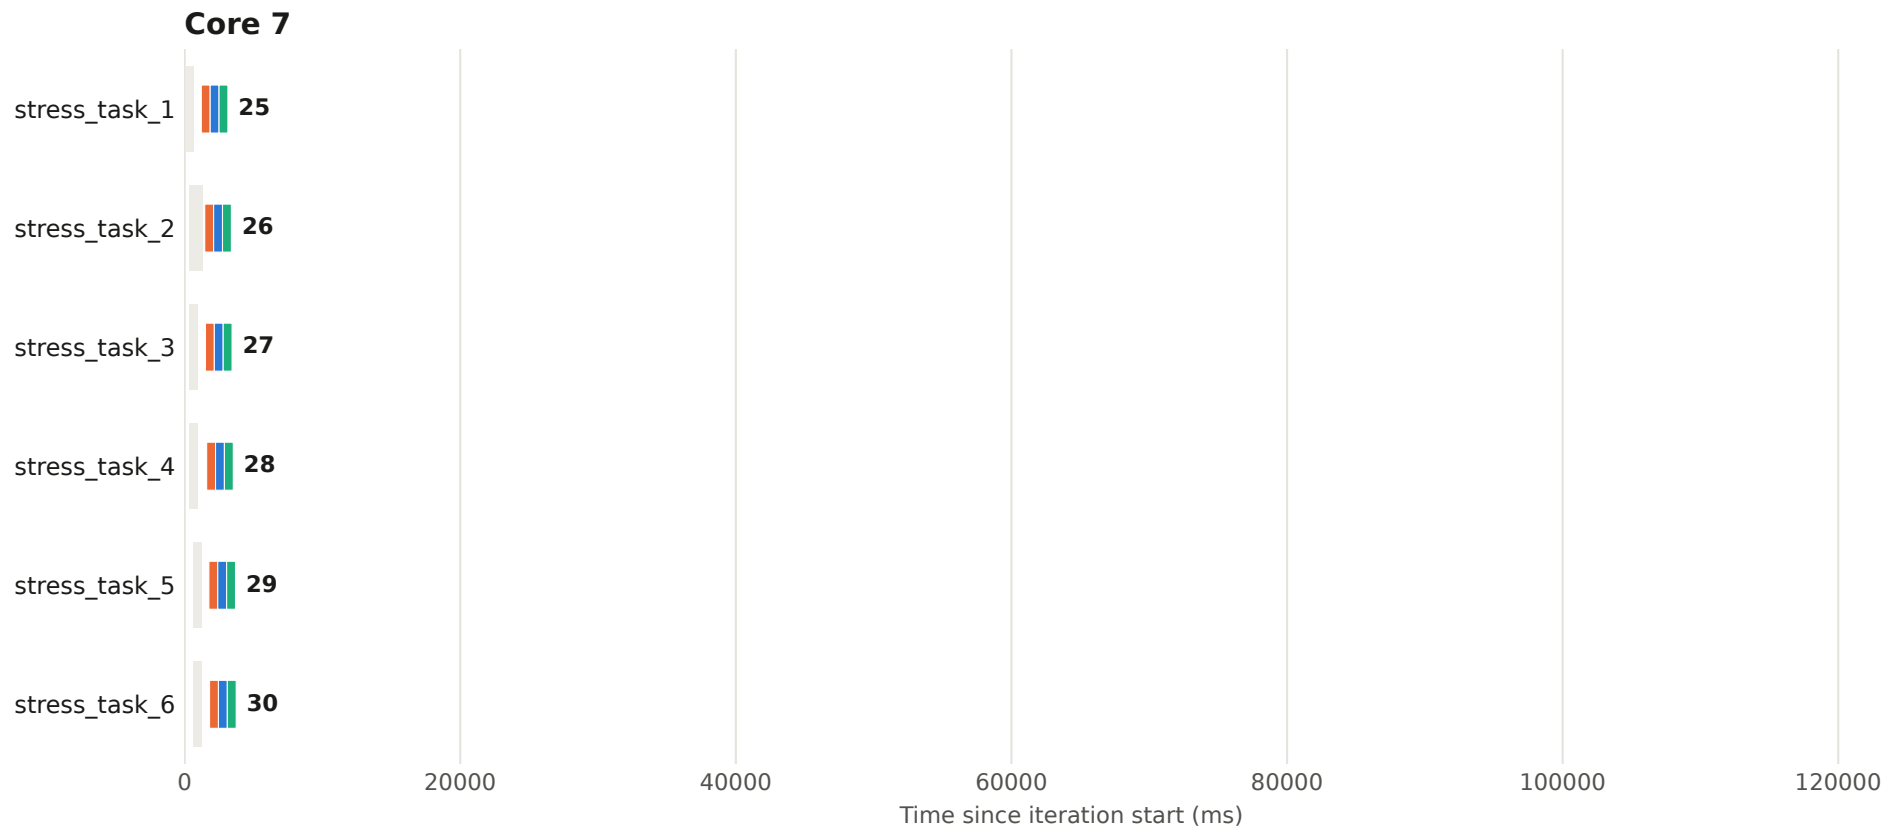


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 80 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

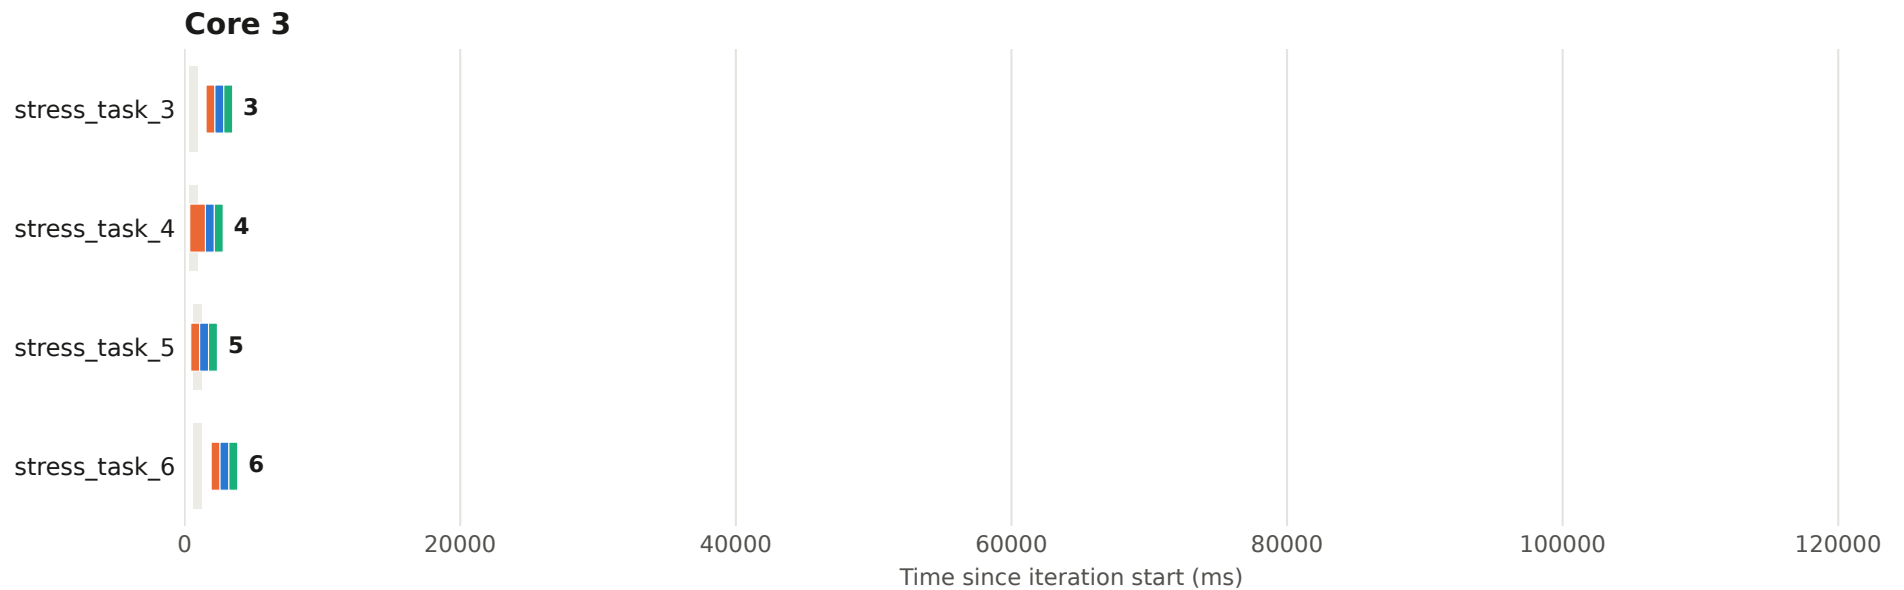


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 80 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

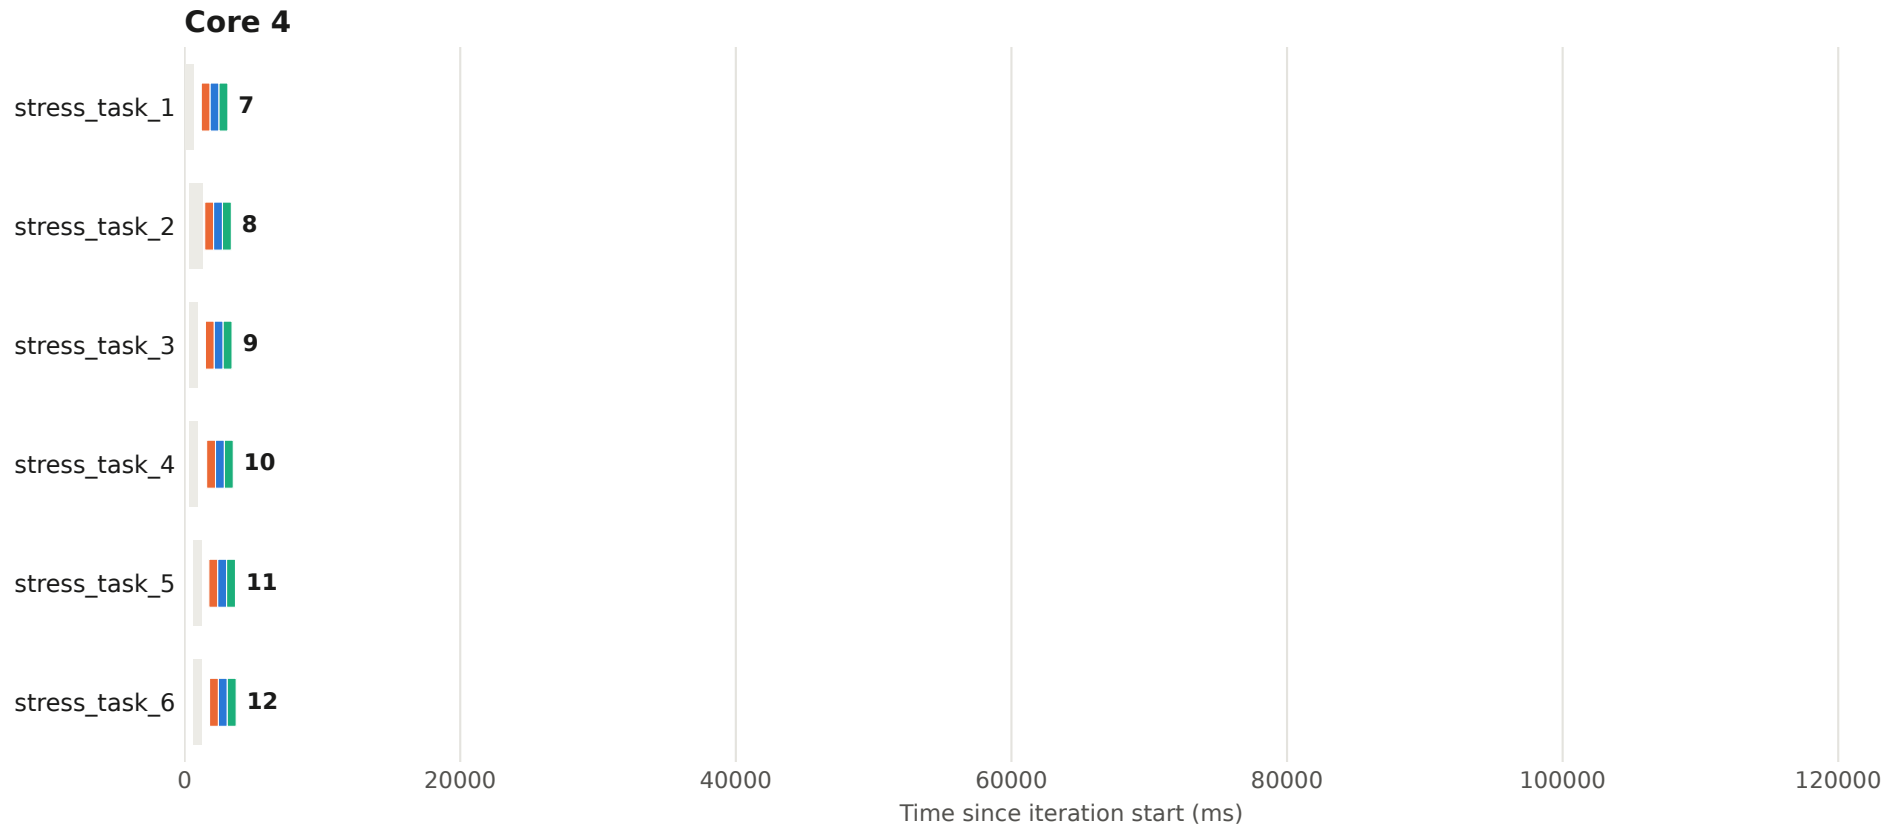


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 80 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

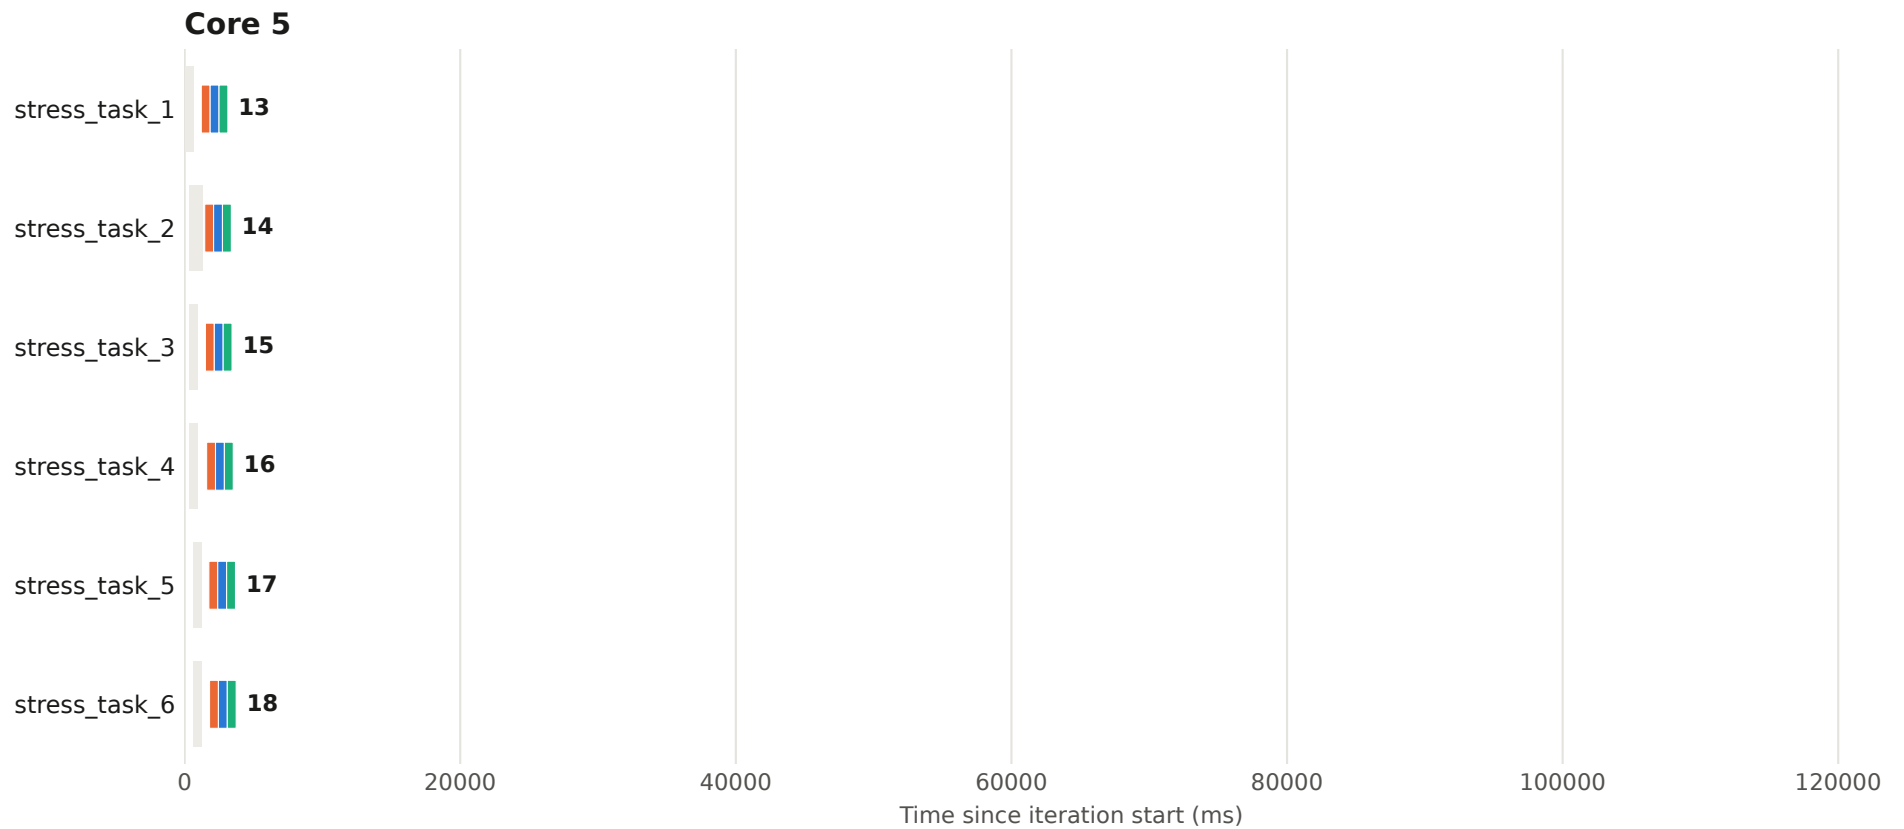


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 80 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

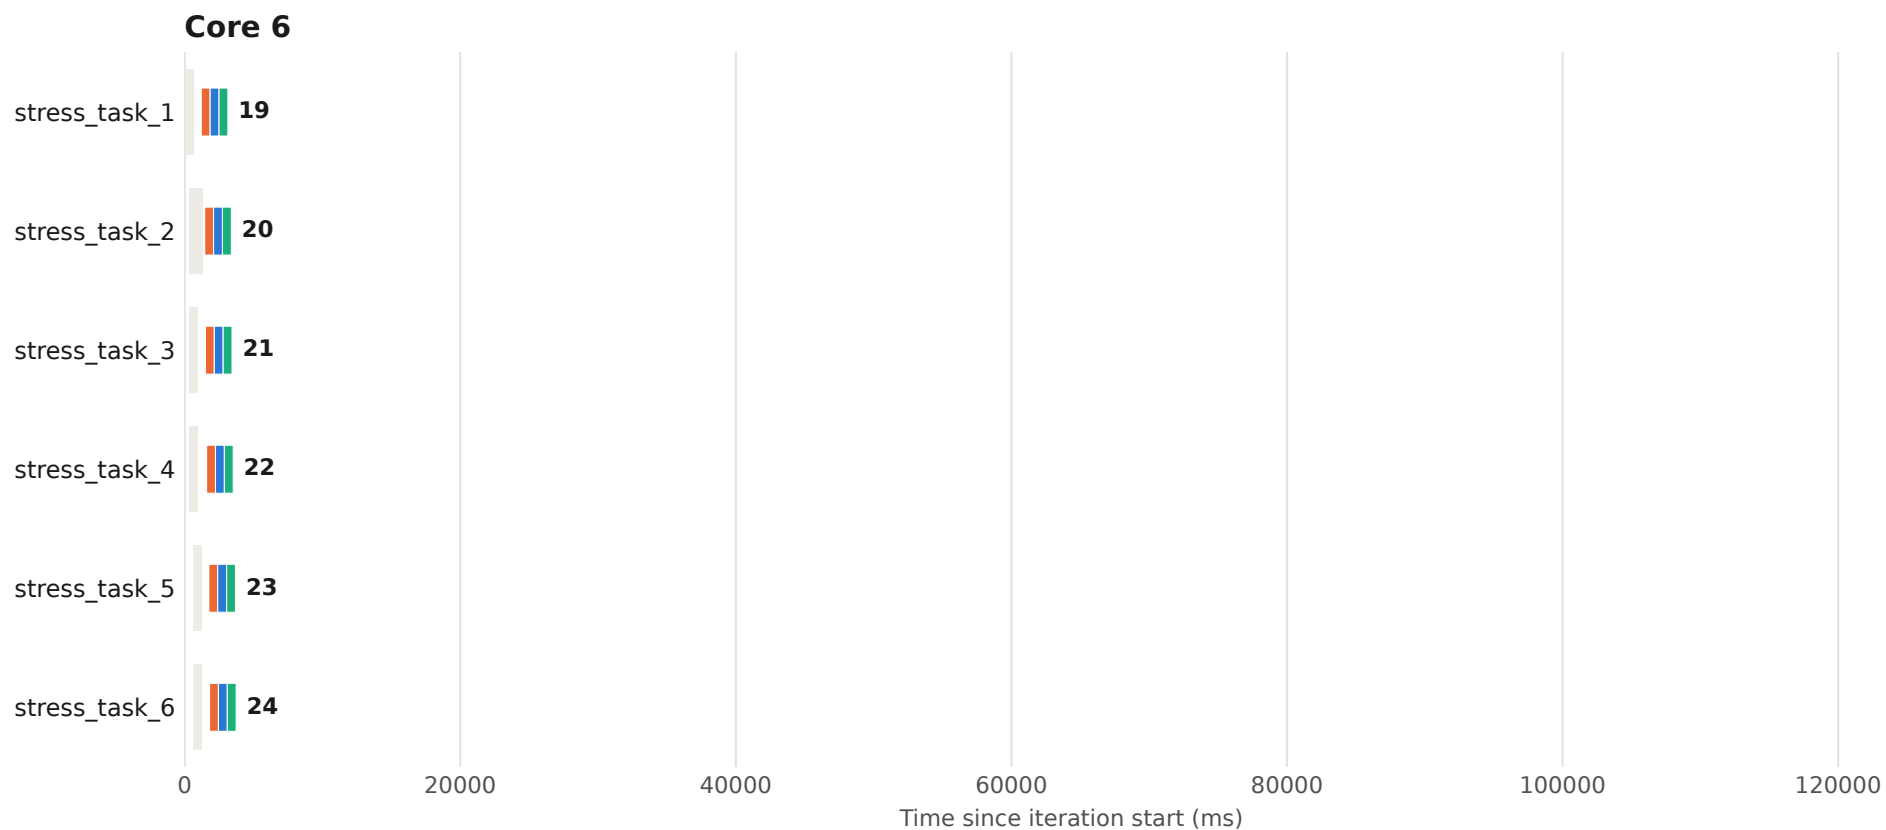


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 80 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

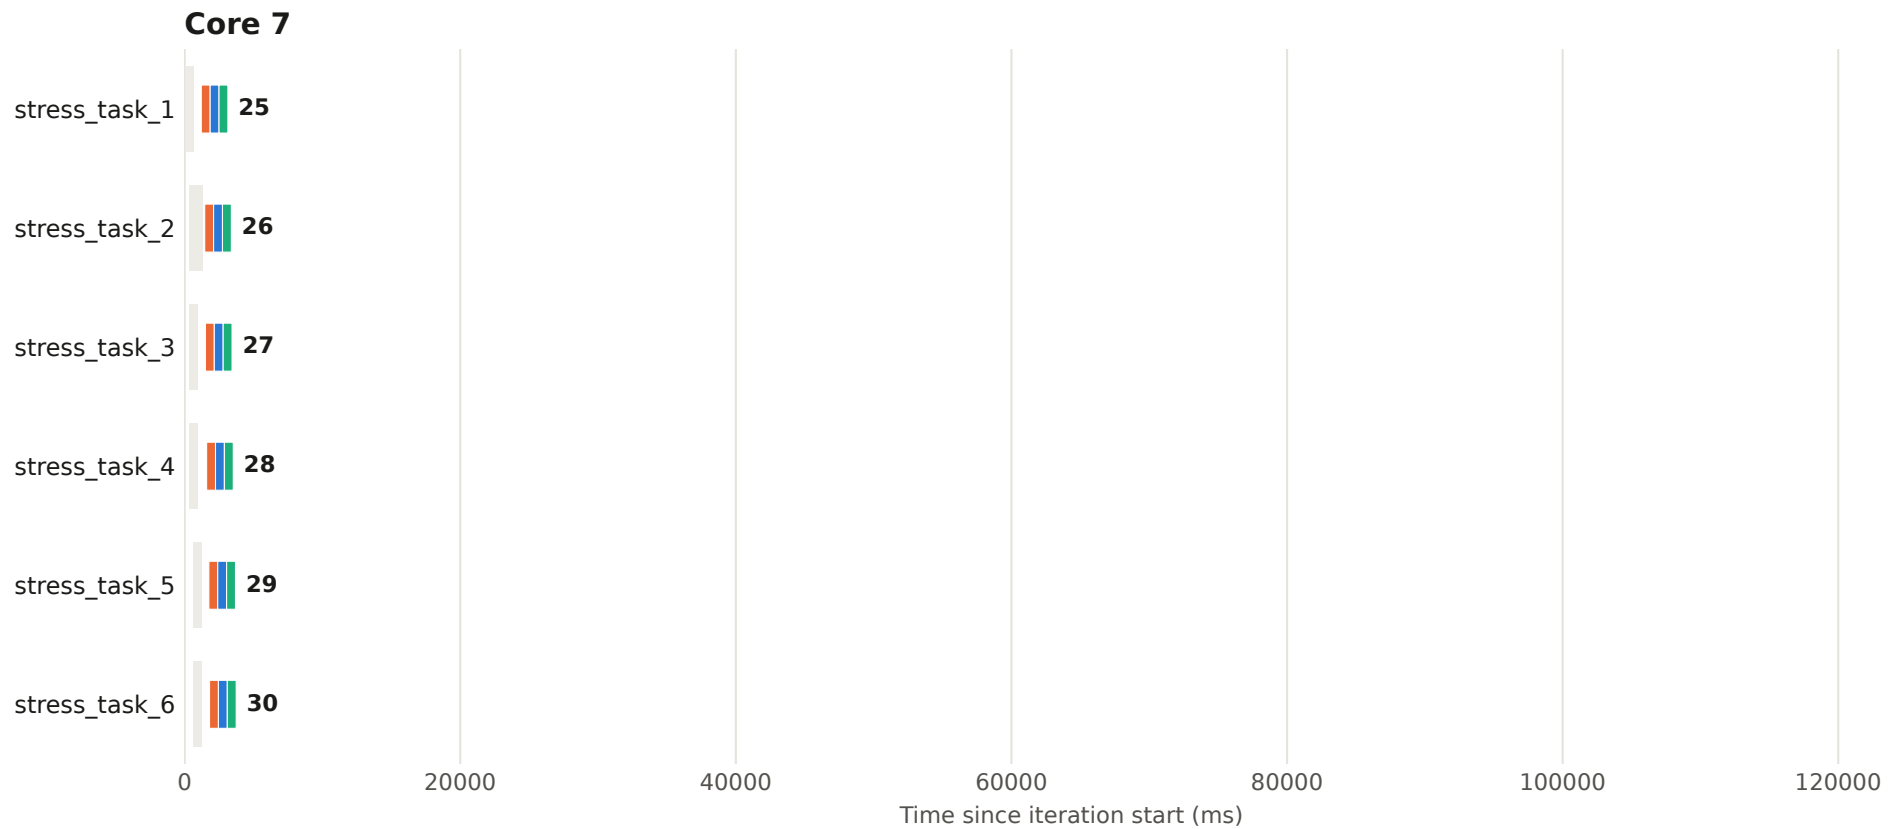


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 81 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

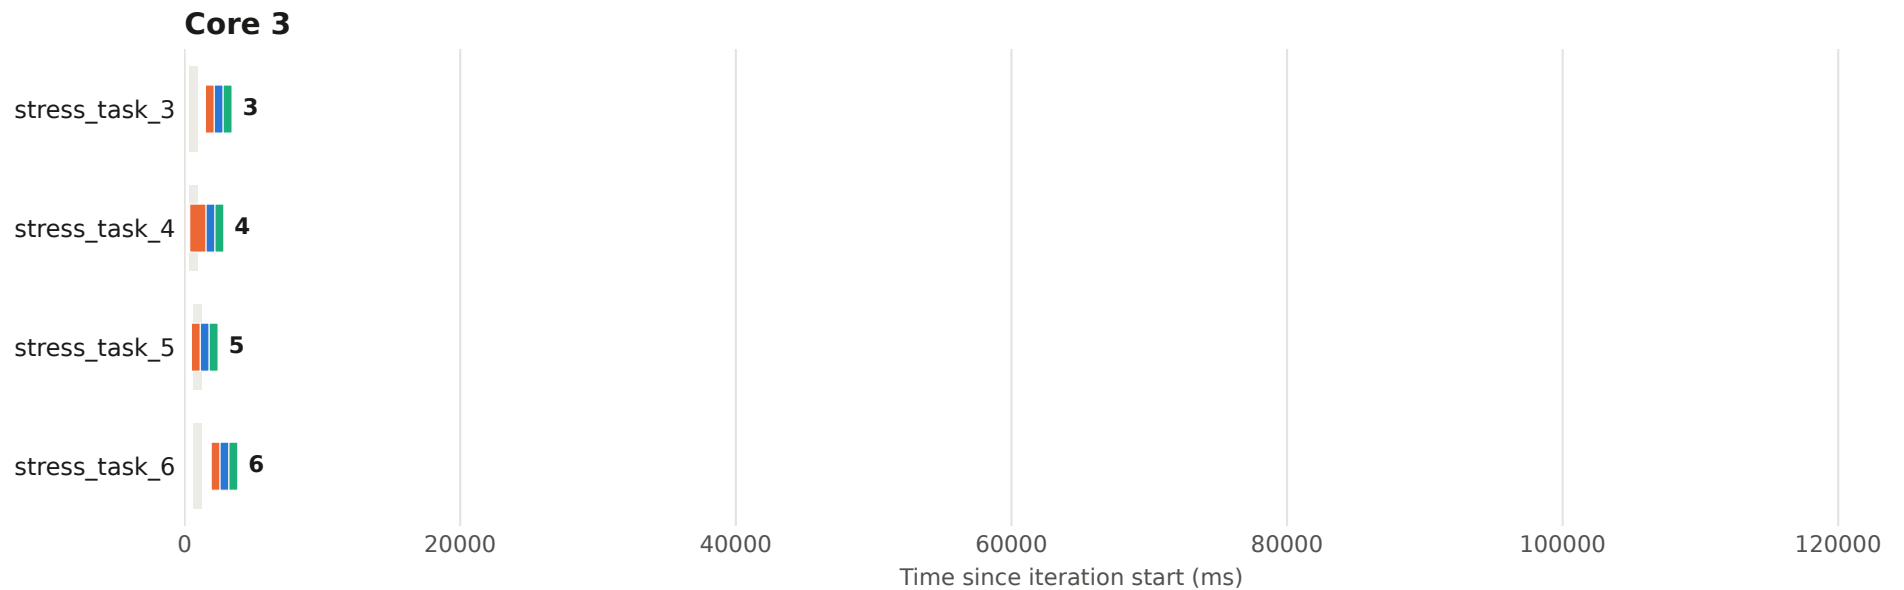

Execution plan - iteration 81 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

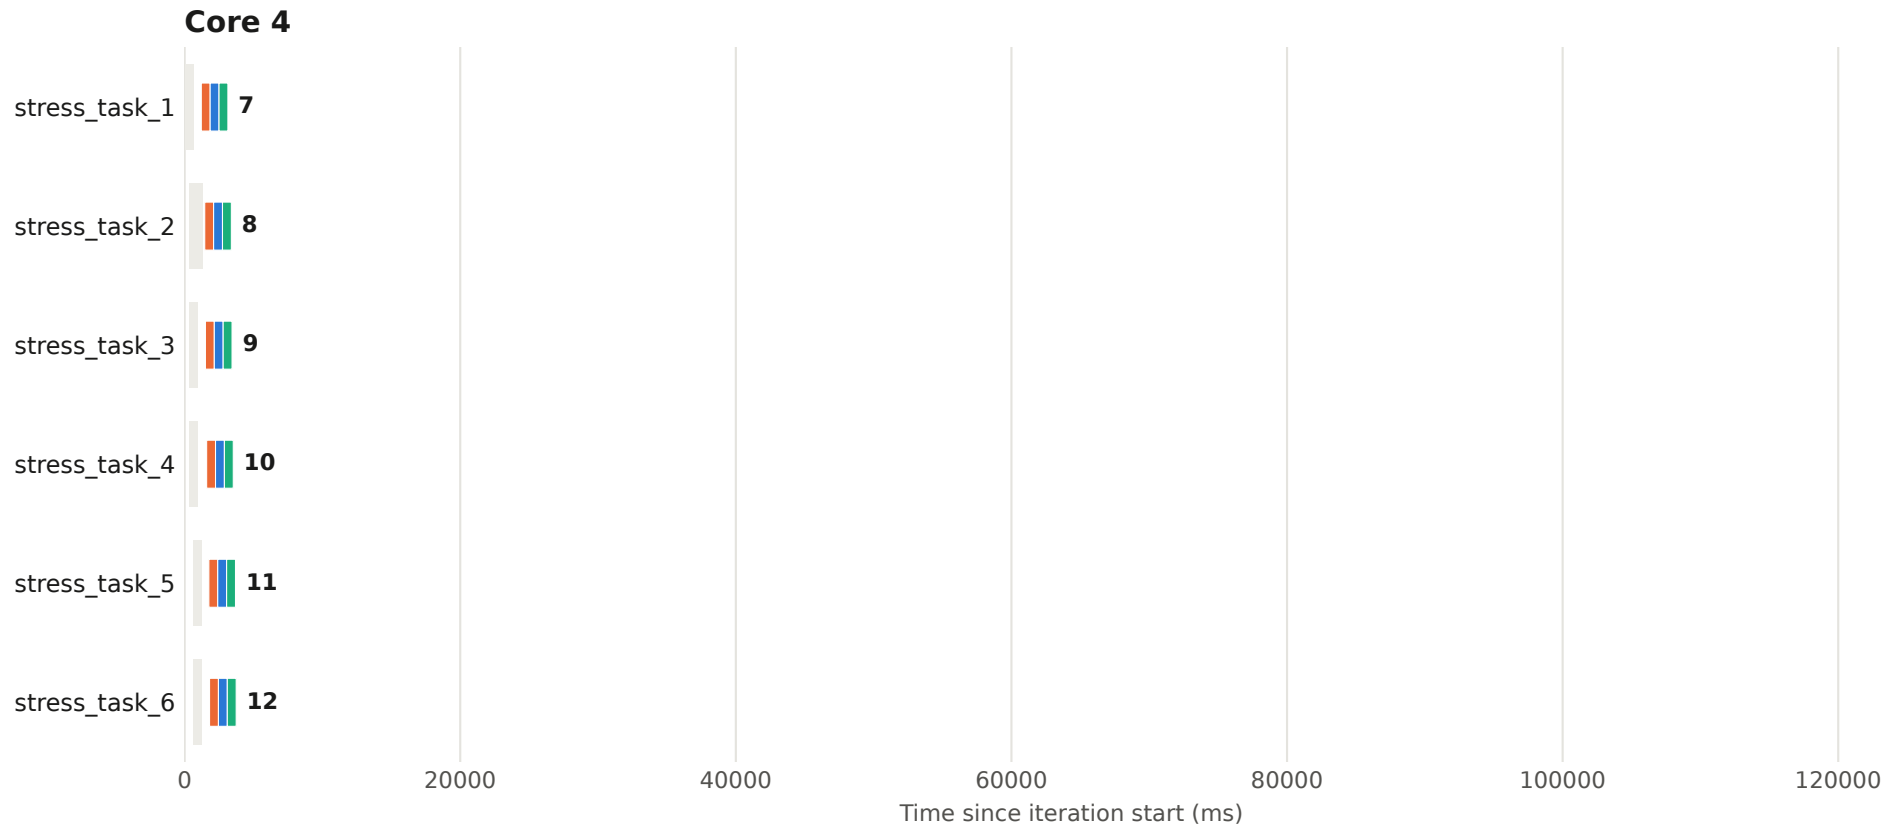


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 81 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

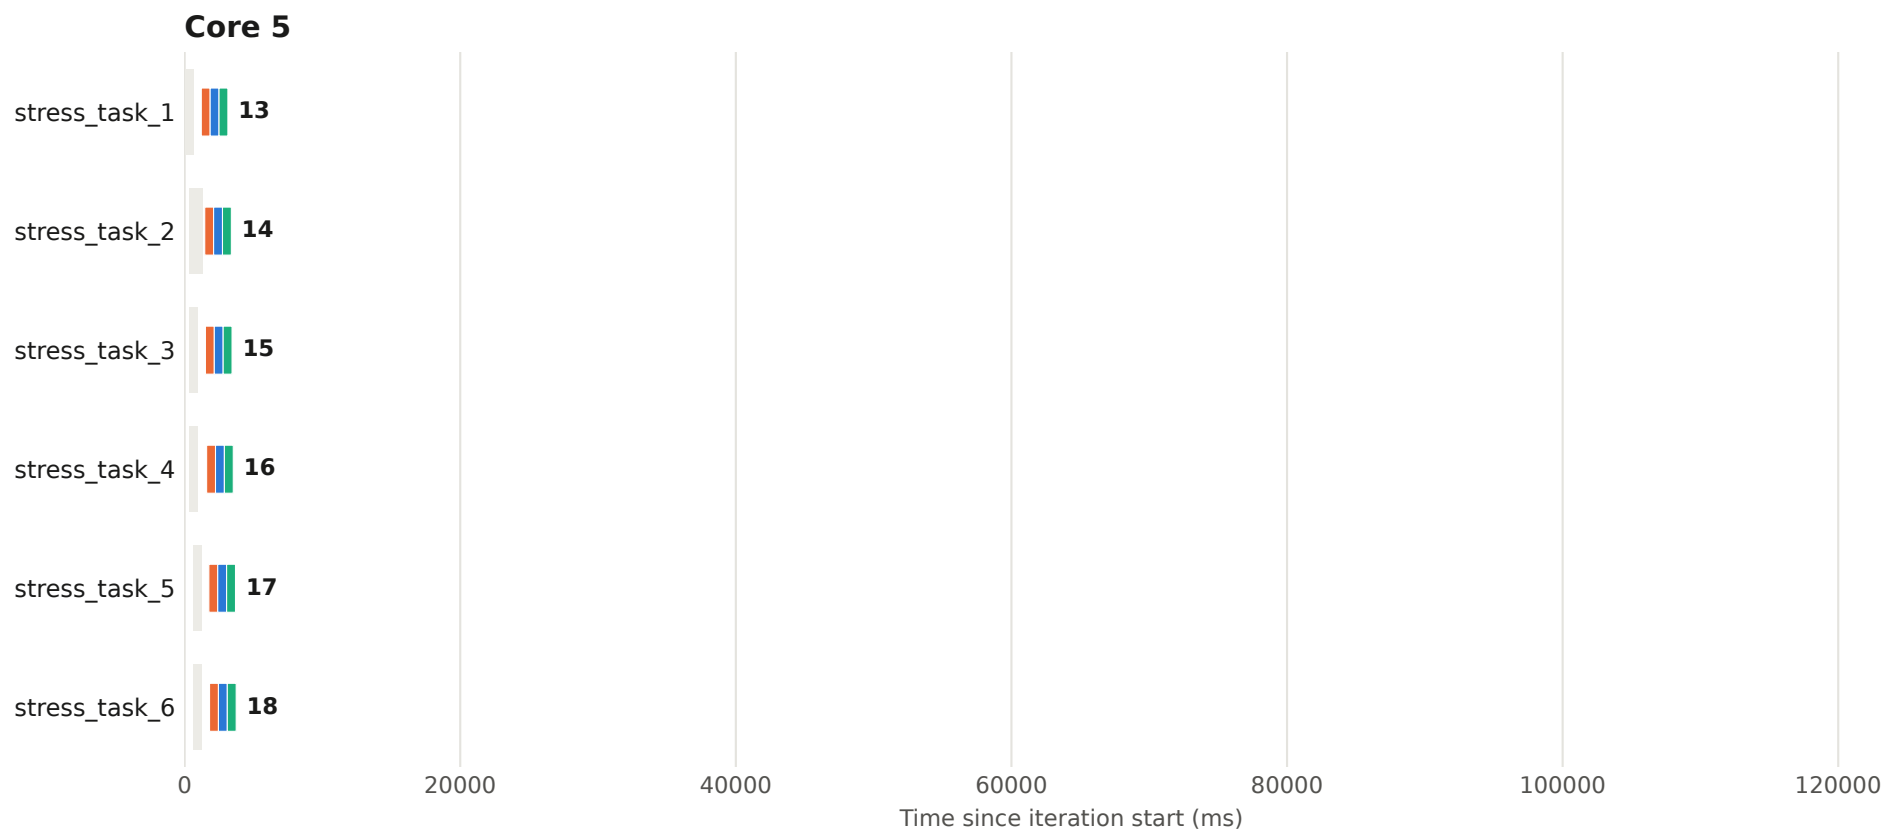


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 81 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

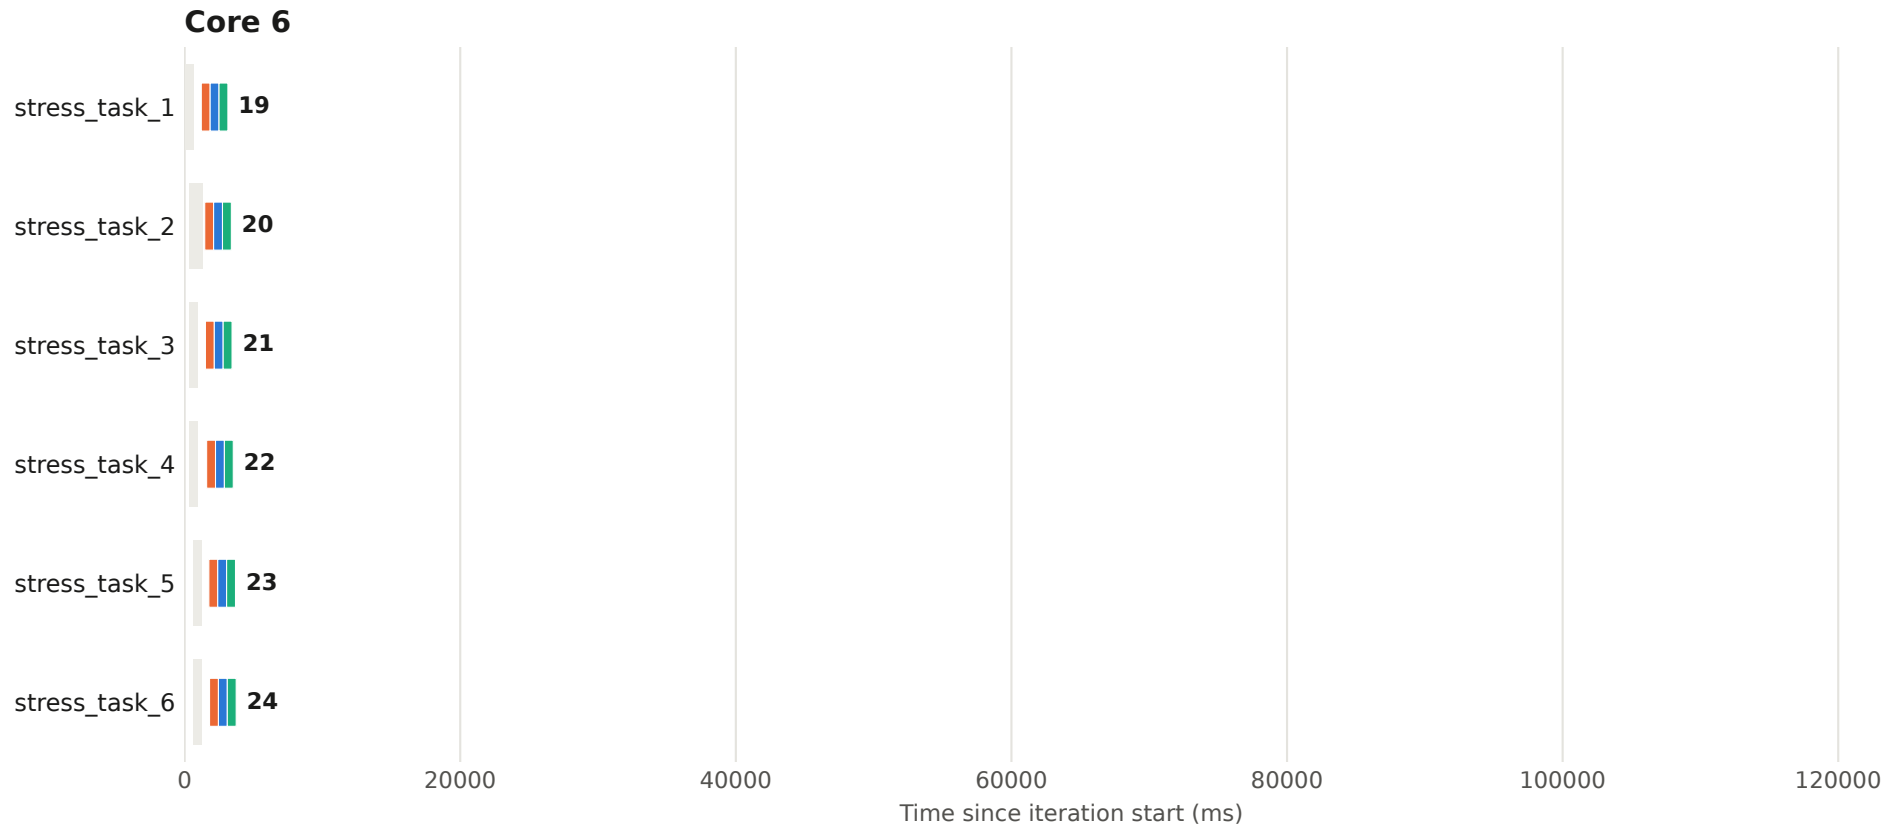


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 81 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

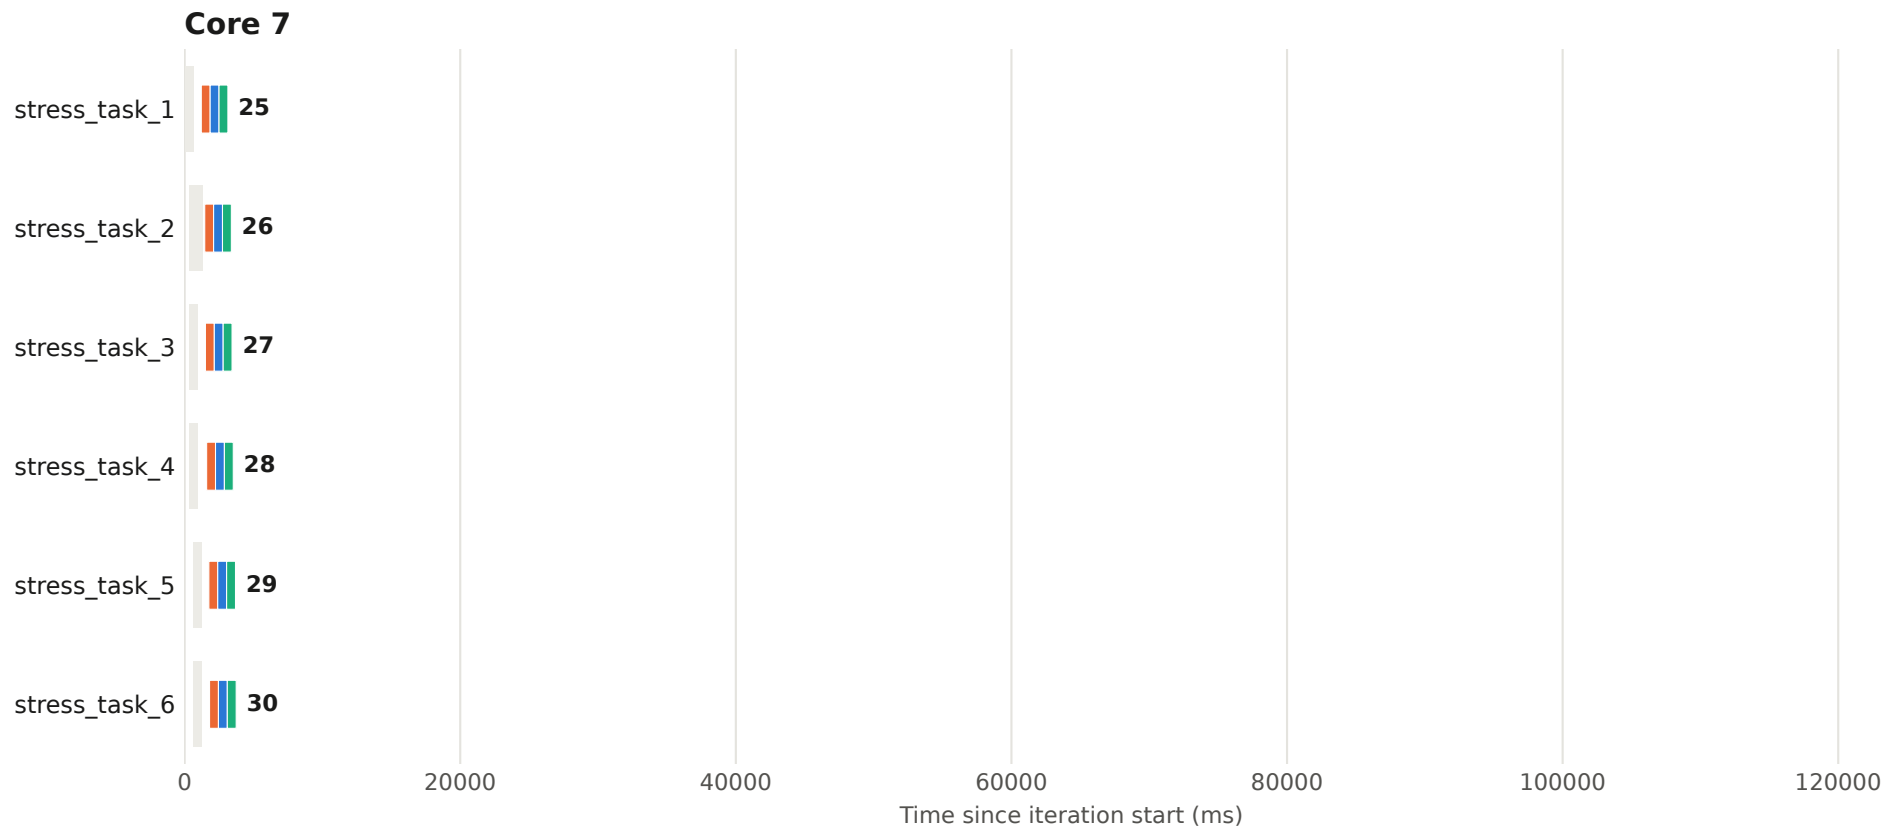


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 82 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

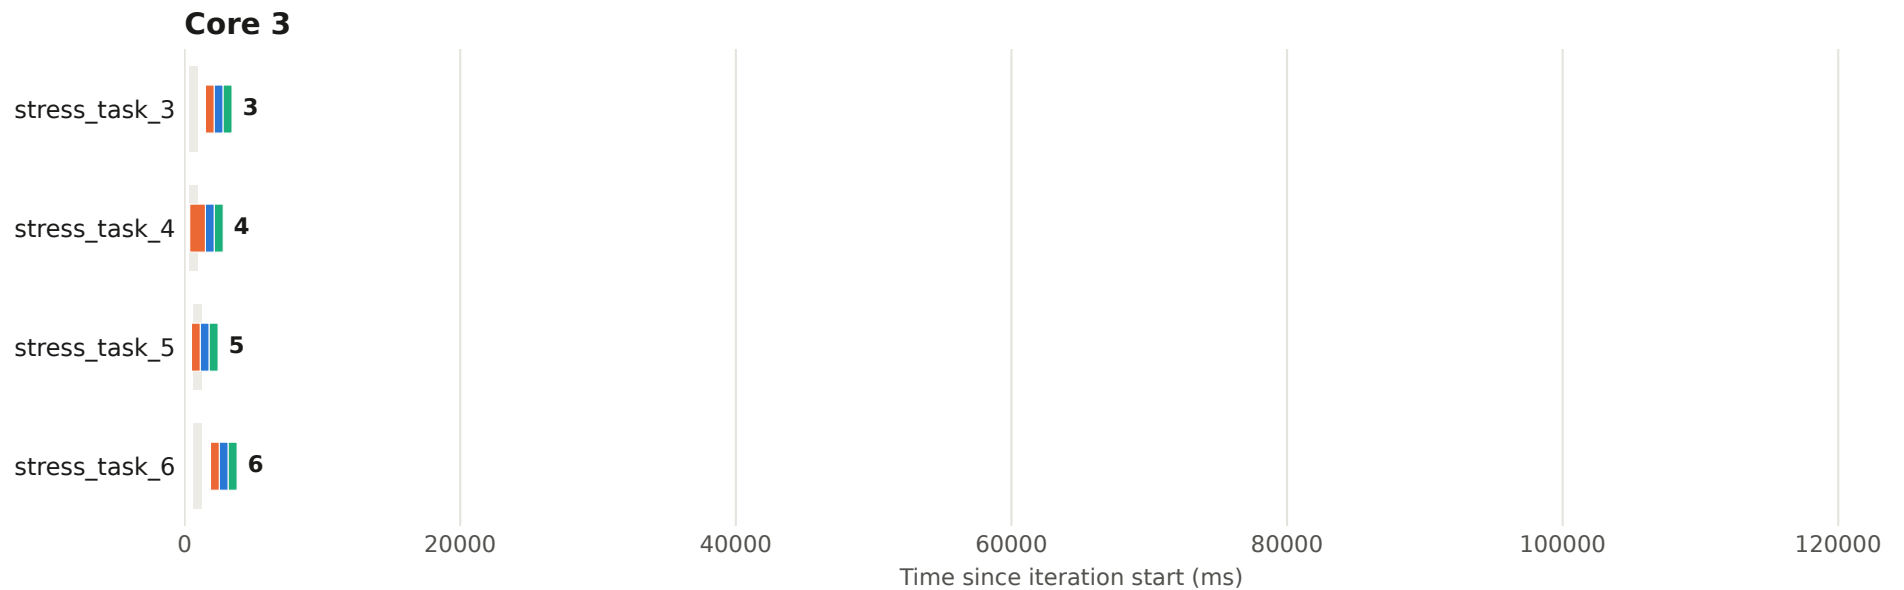


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 82 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

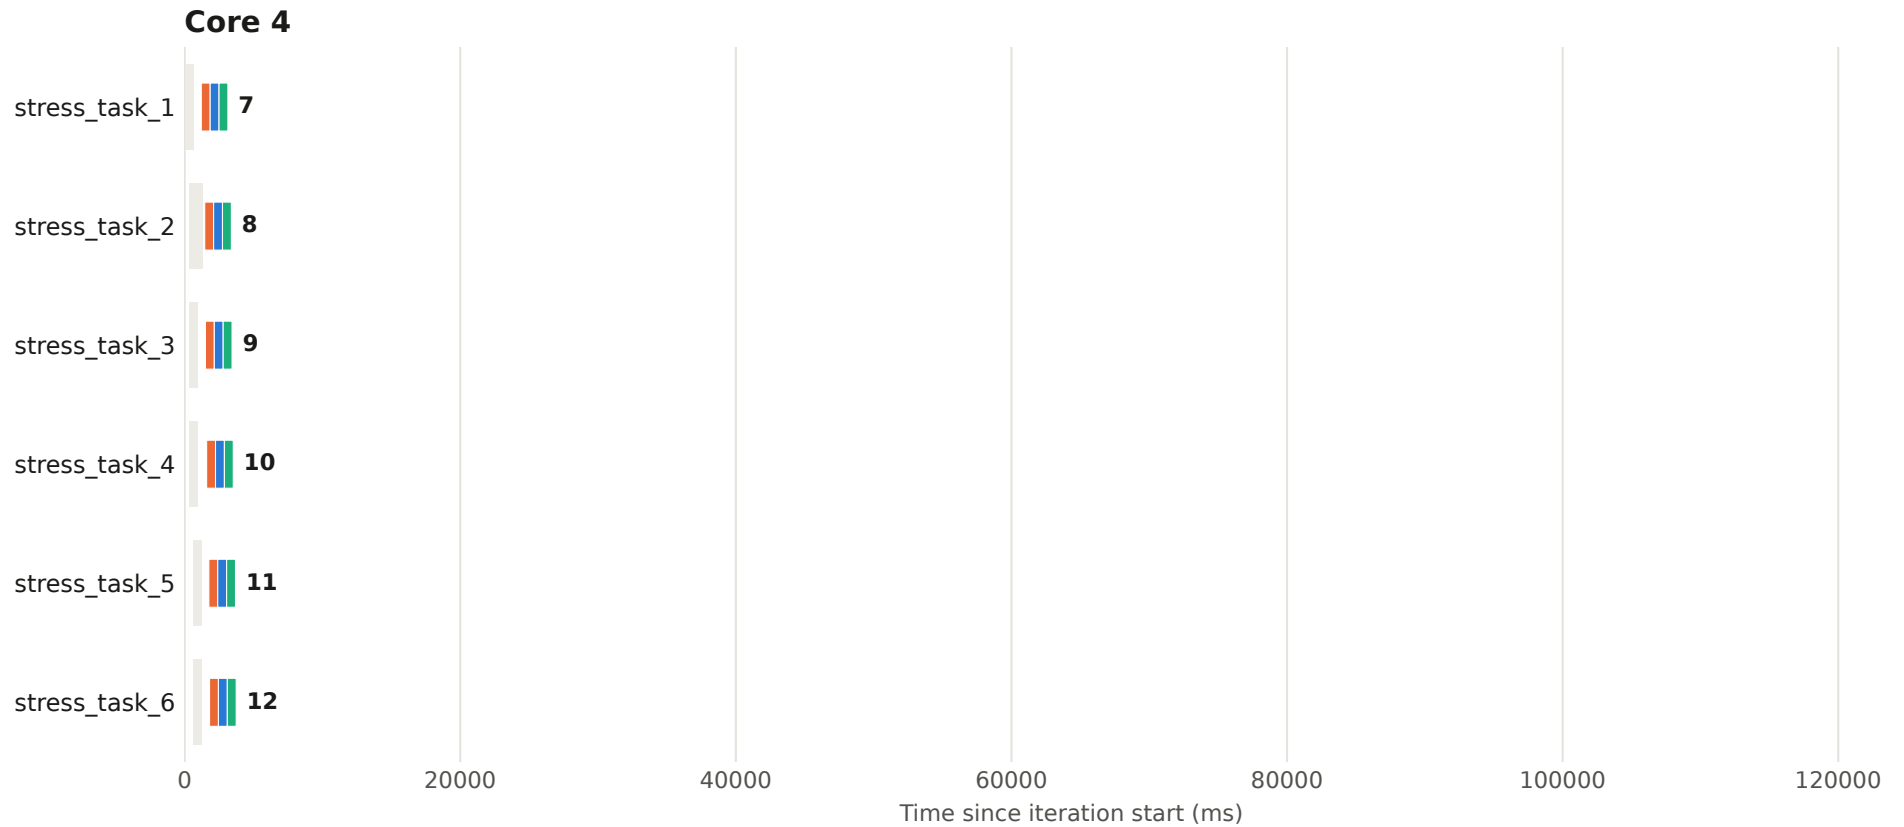


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 82 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

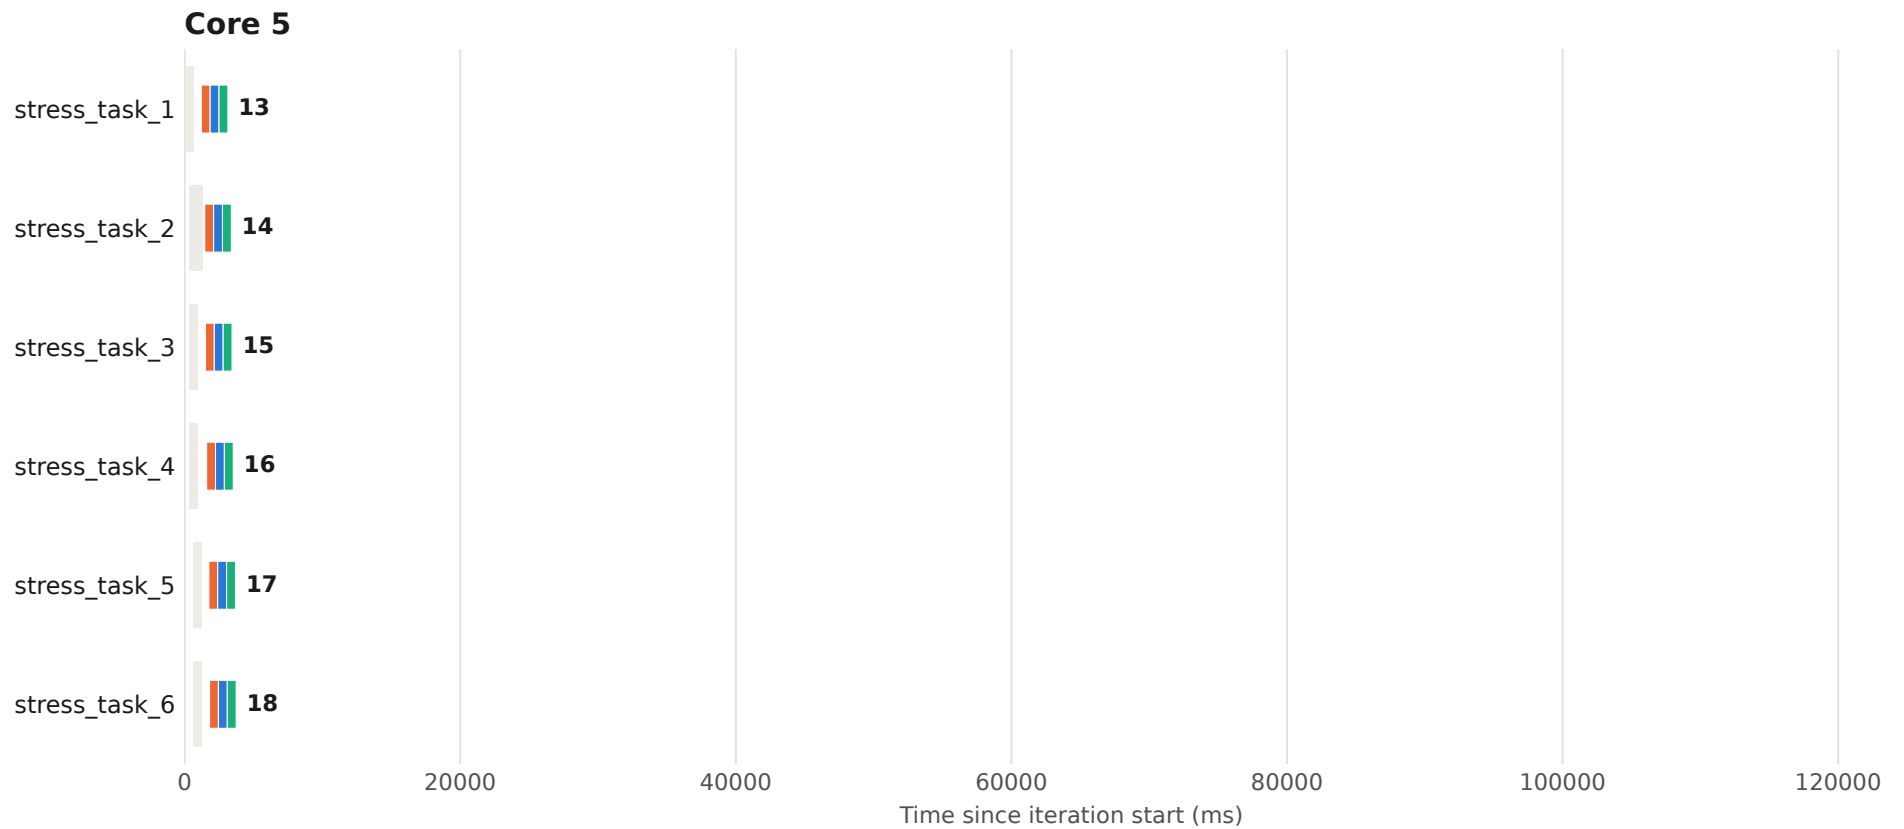


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 82 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

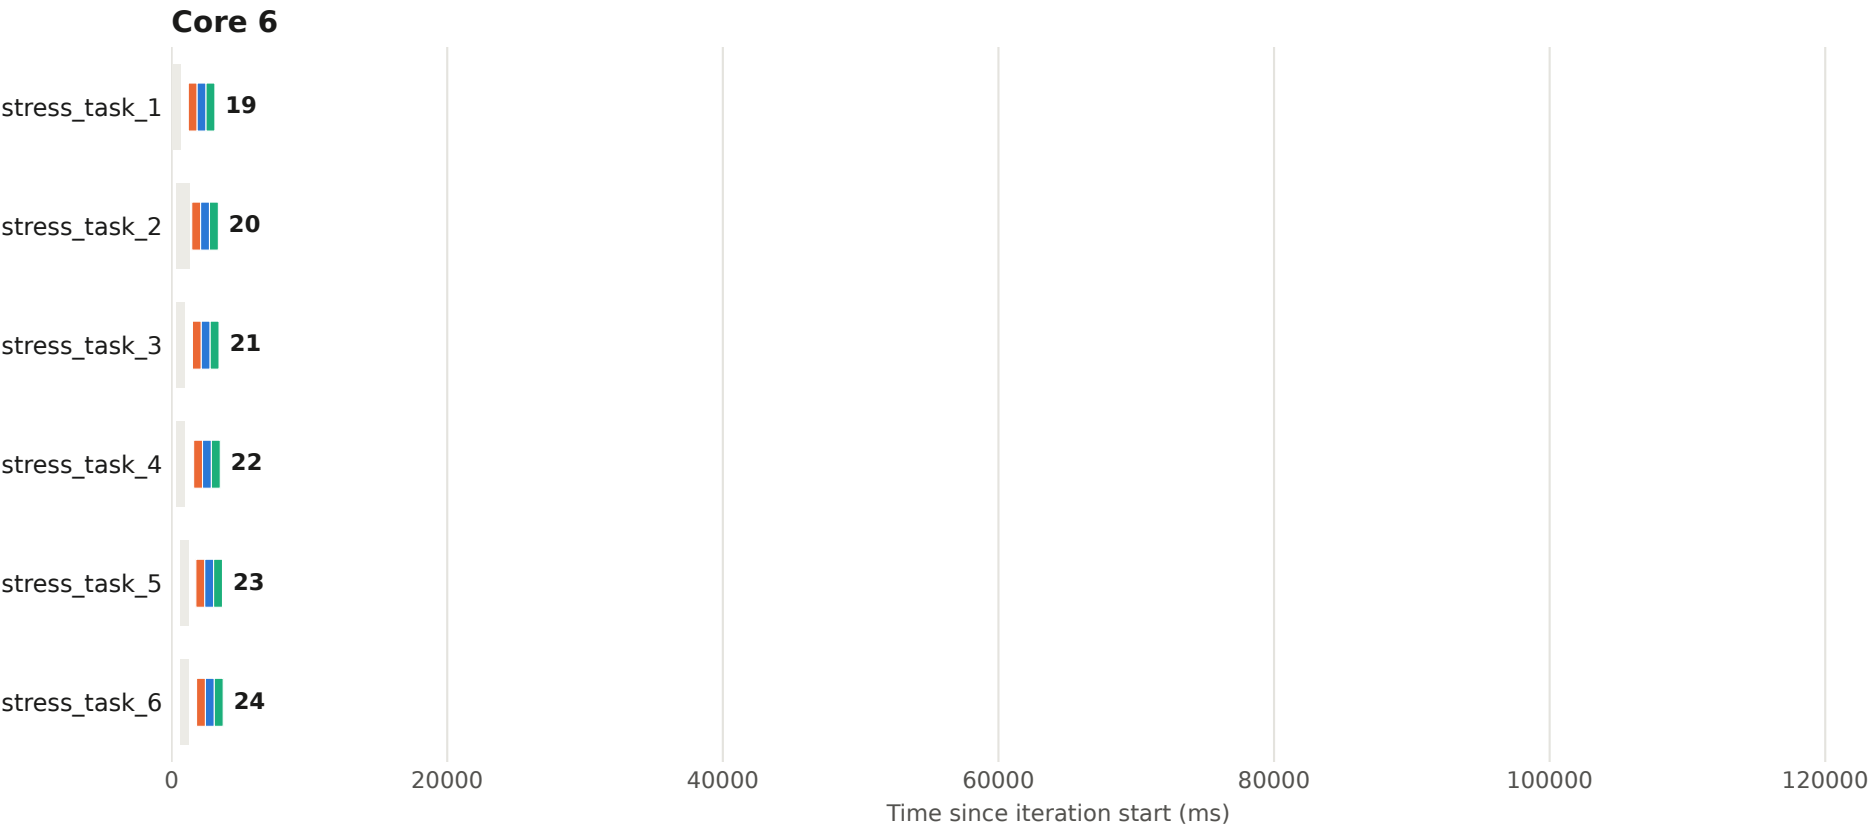


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 82 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

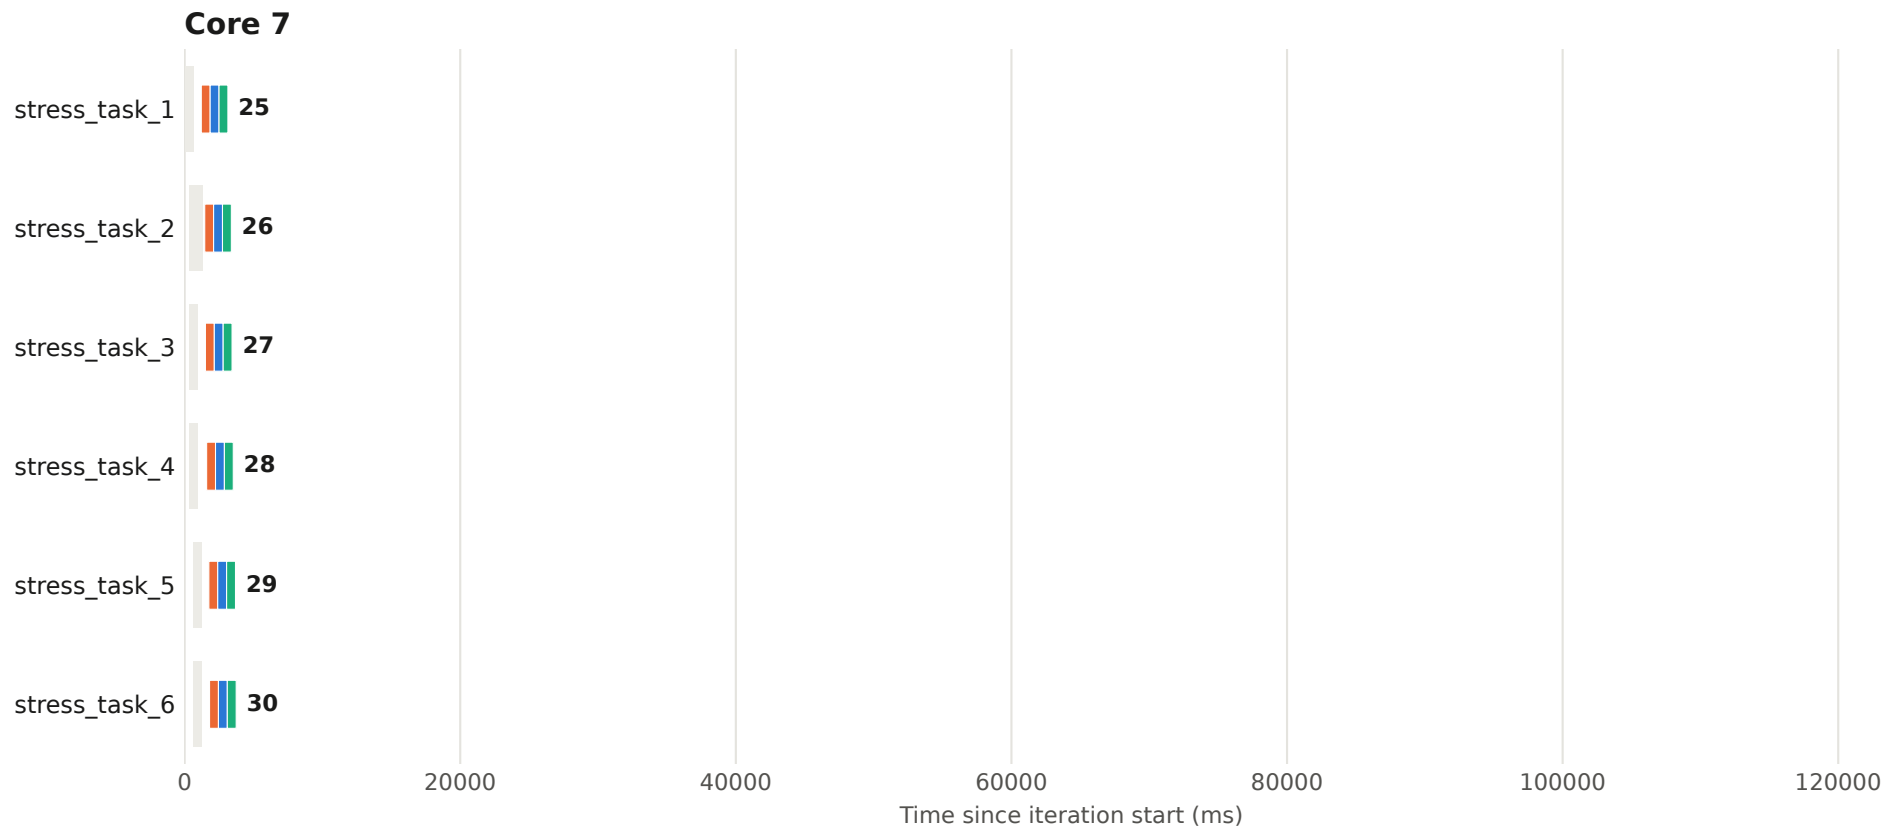


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 83 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

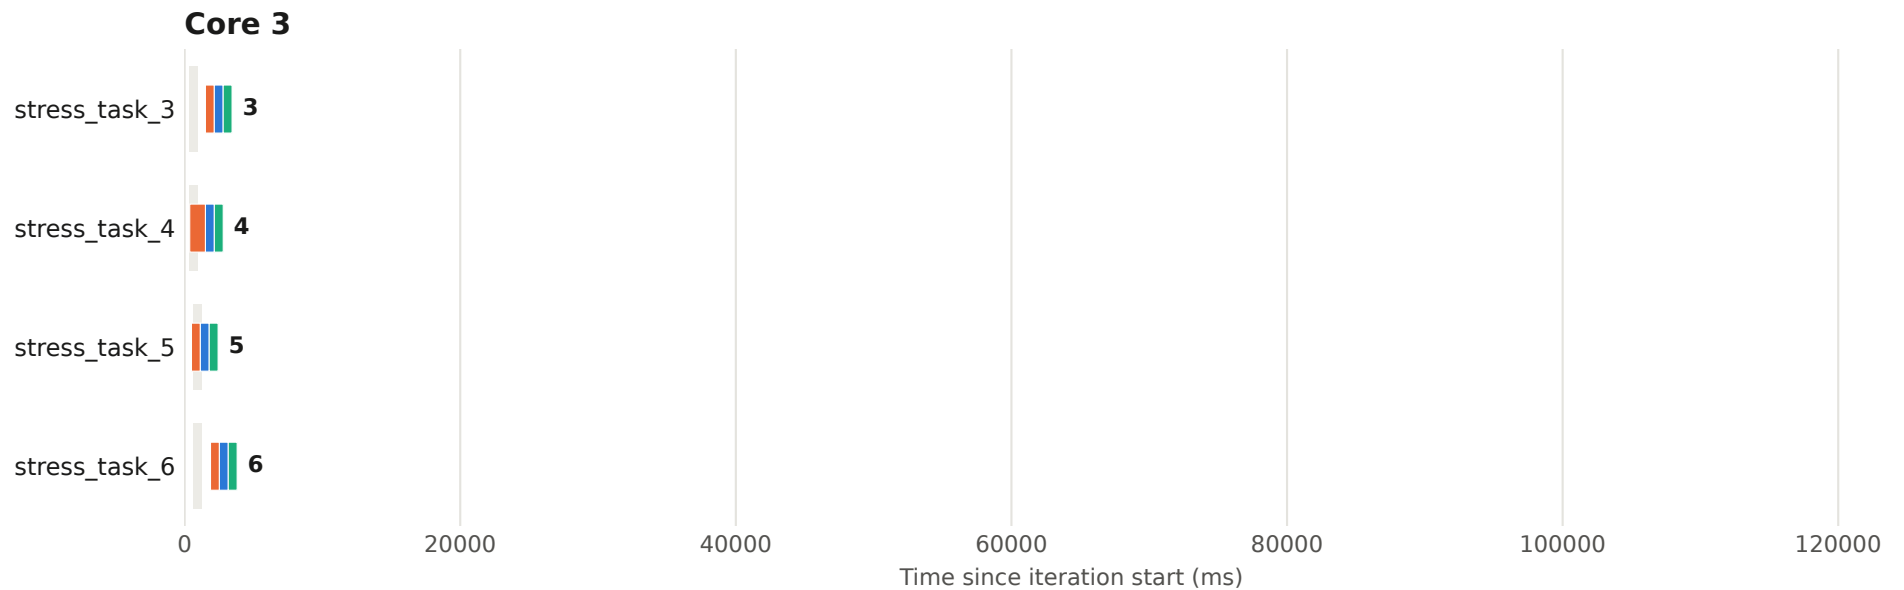


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 83 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

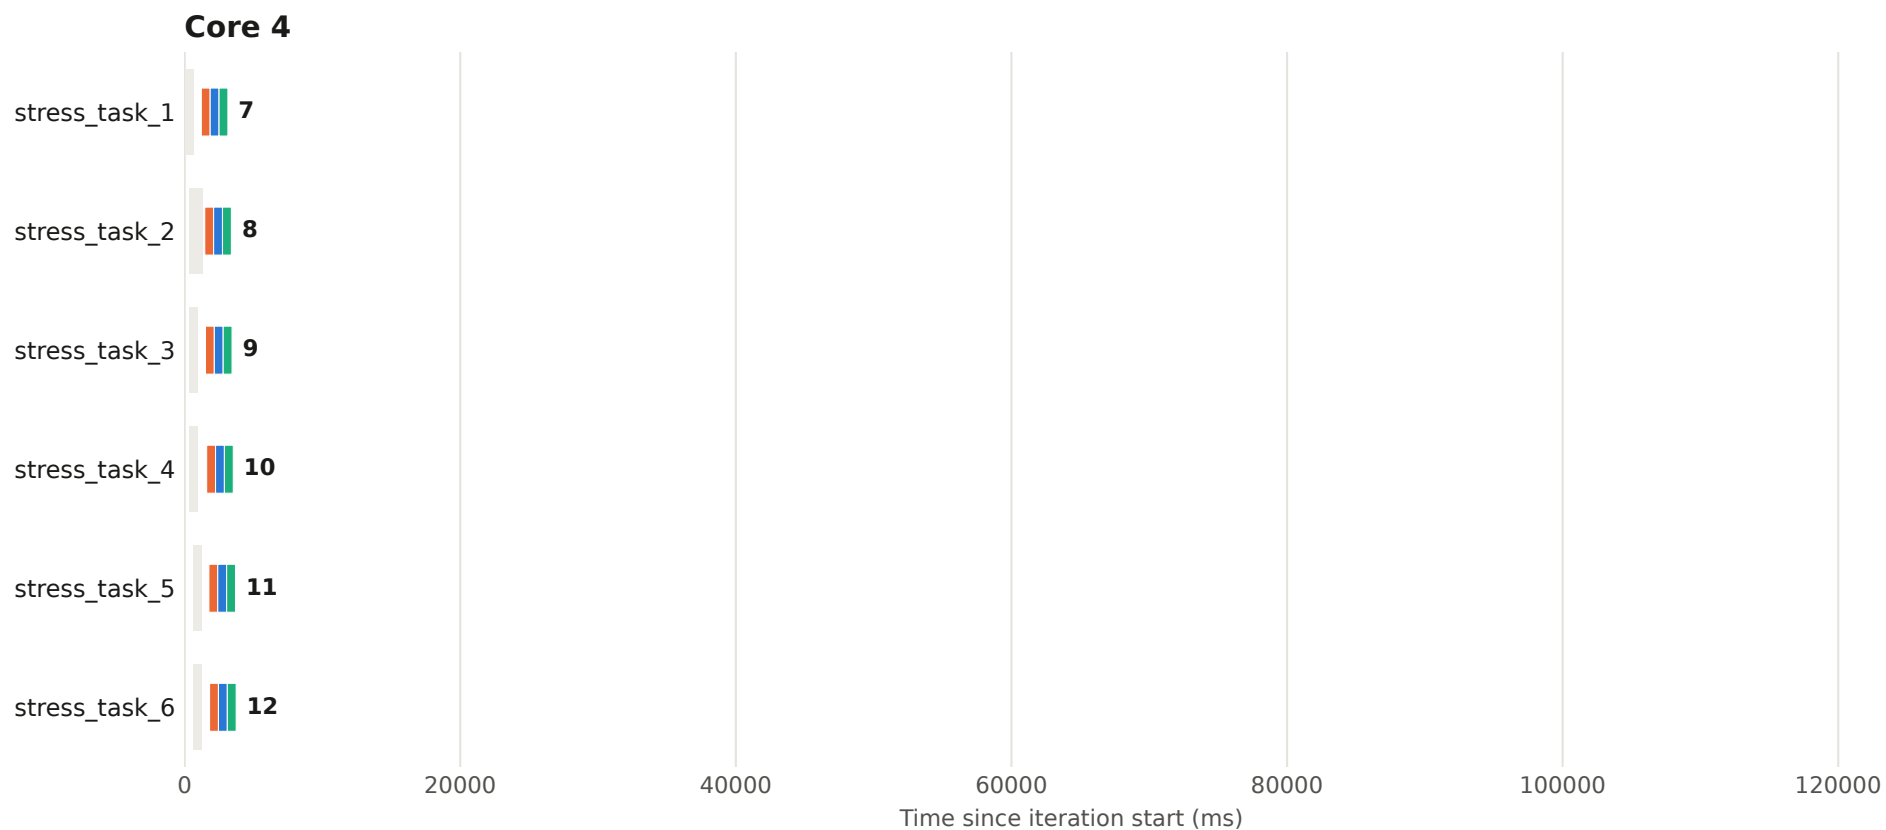


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 83 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

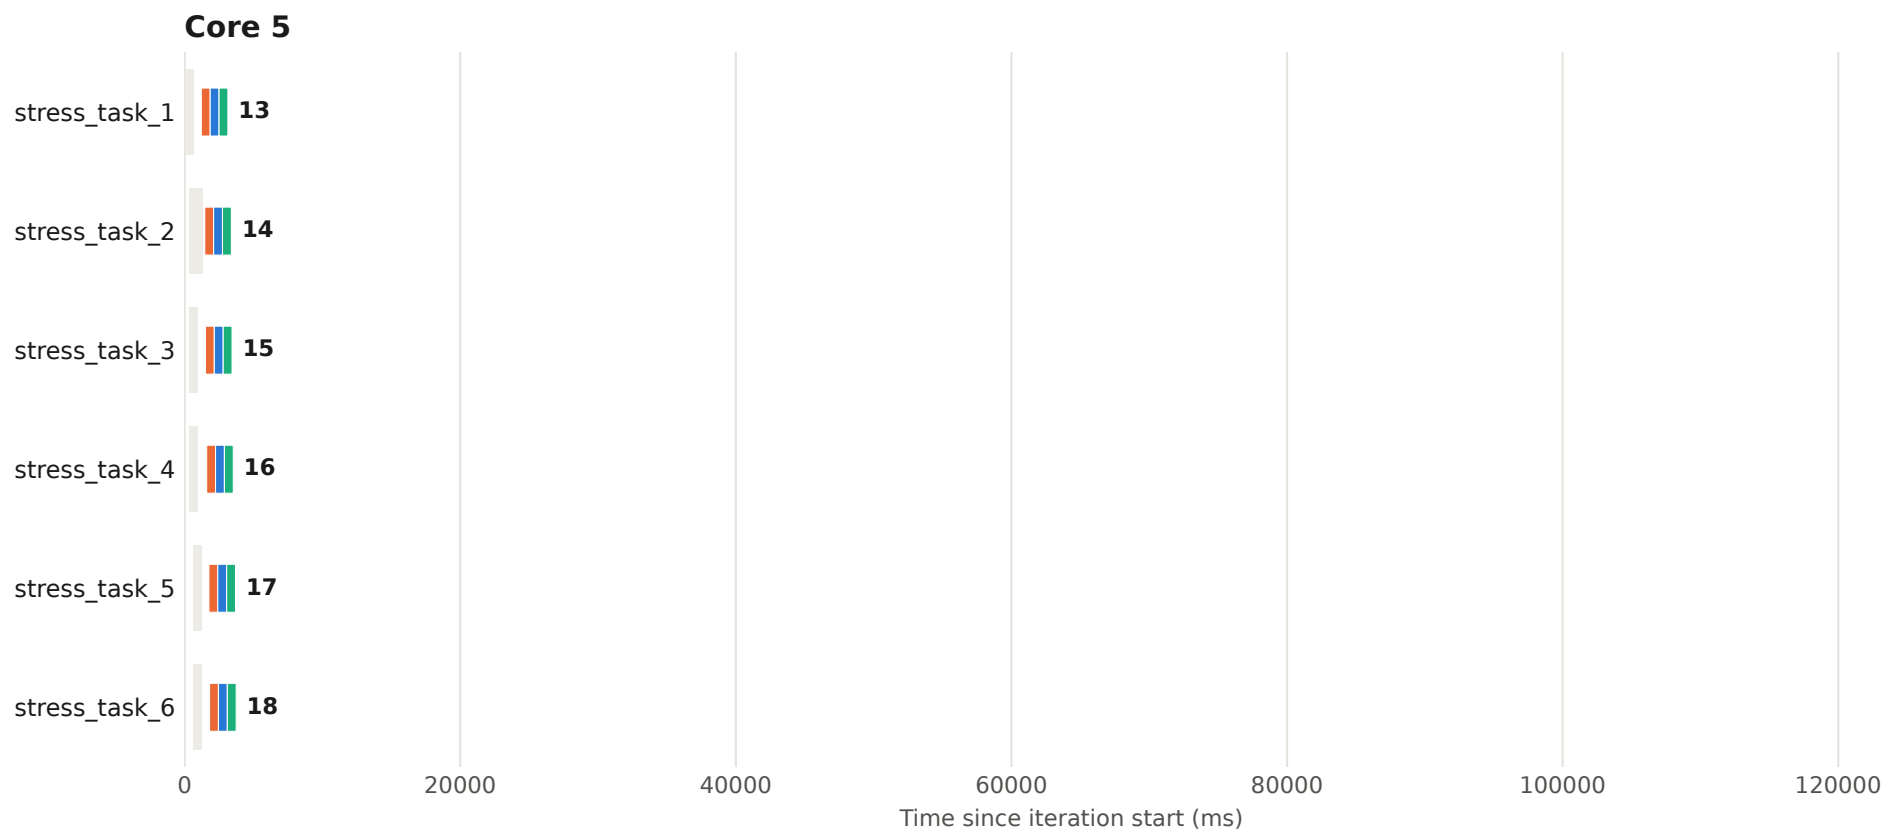


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 83 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

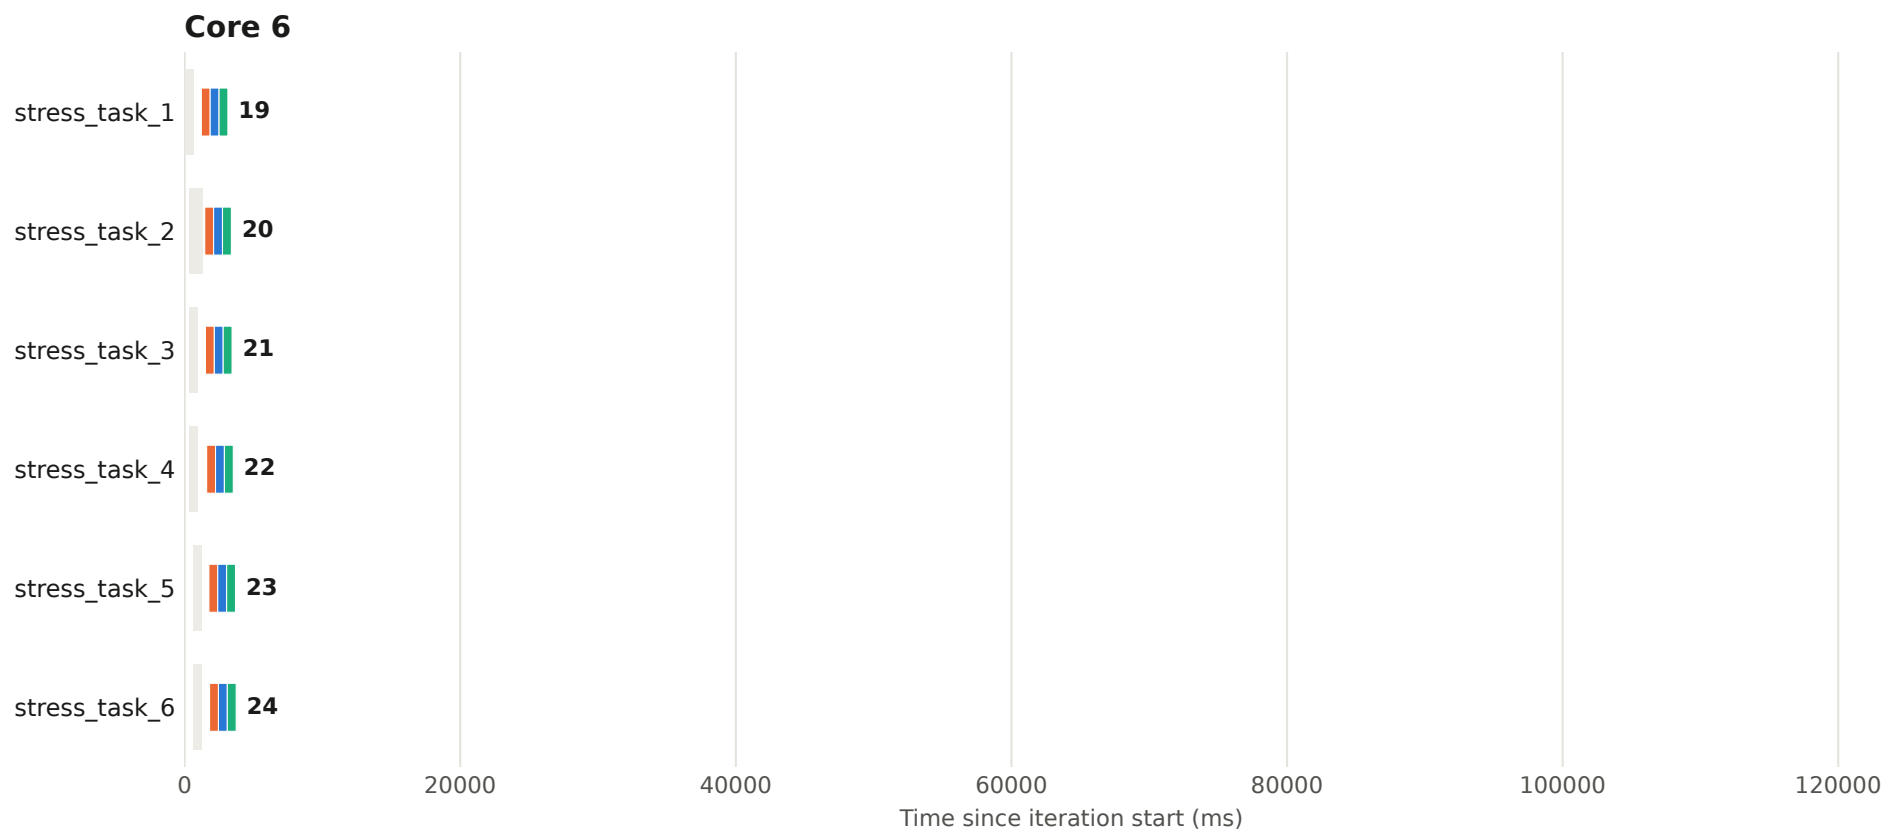


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 83 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

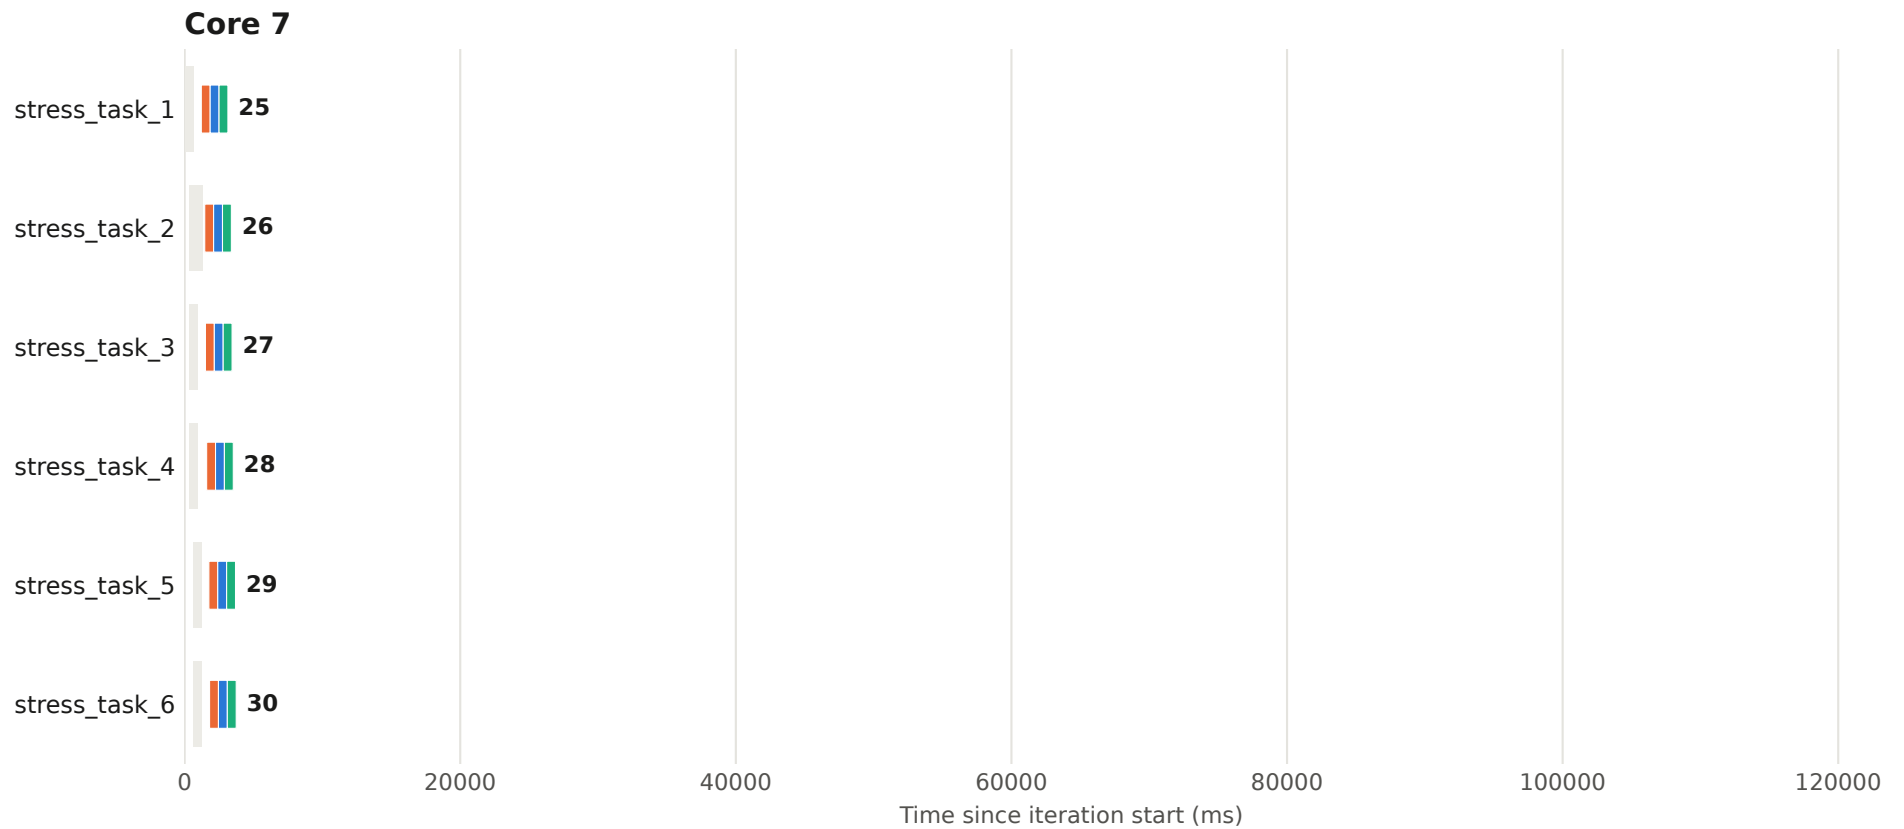


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 84 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

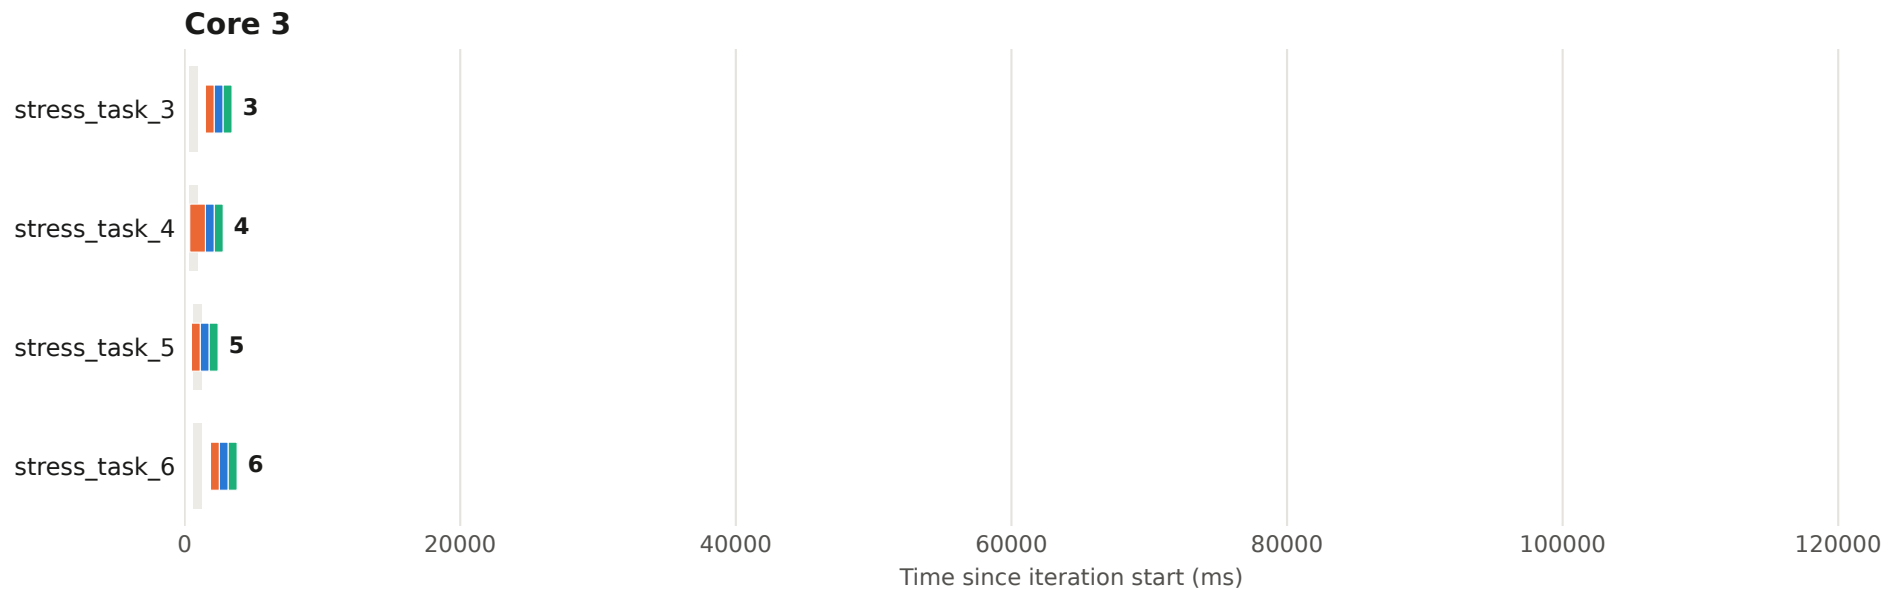

Execution plan - iteration 84 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

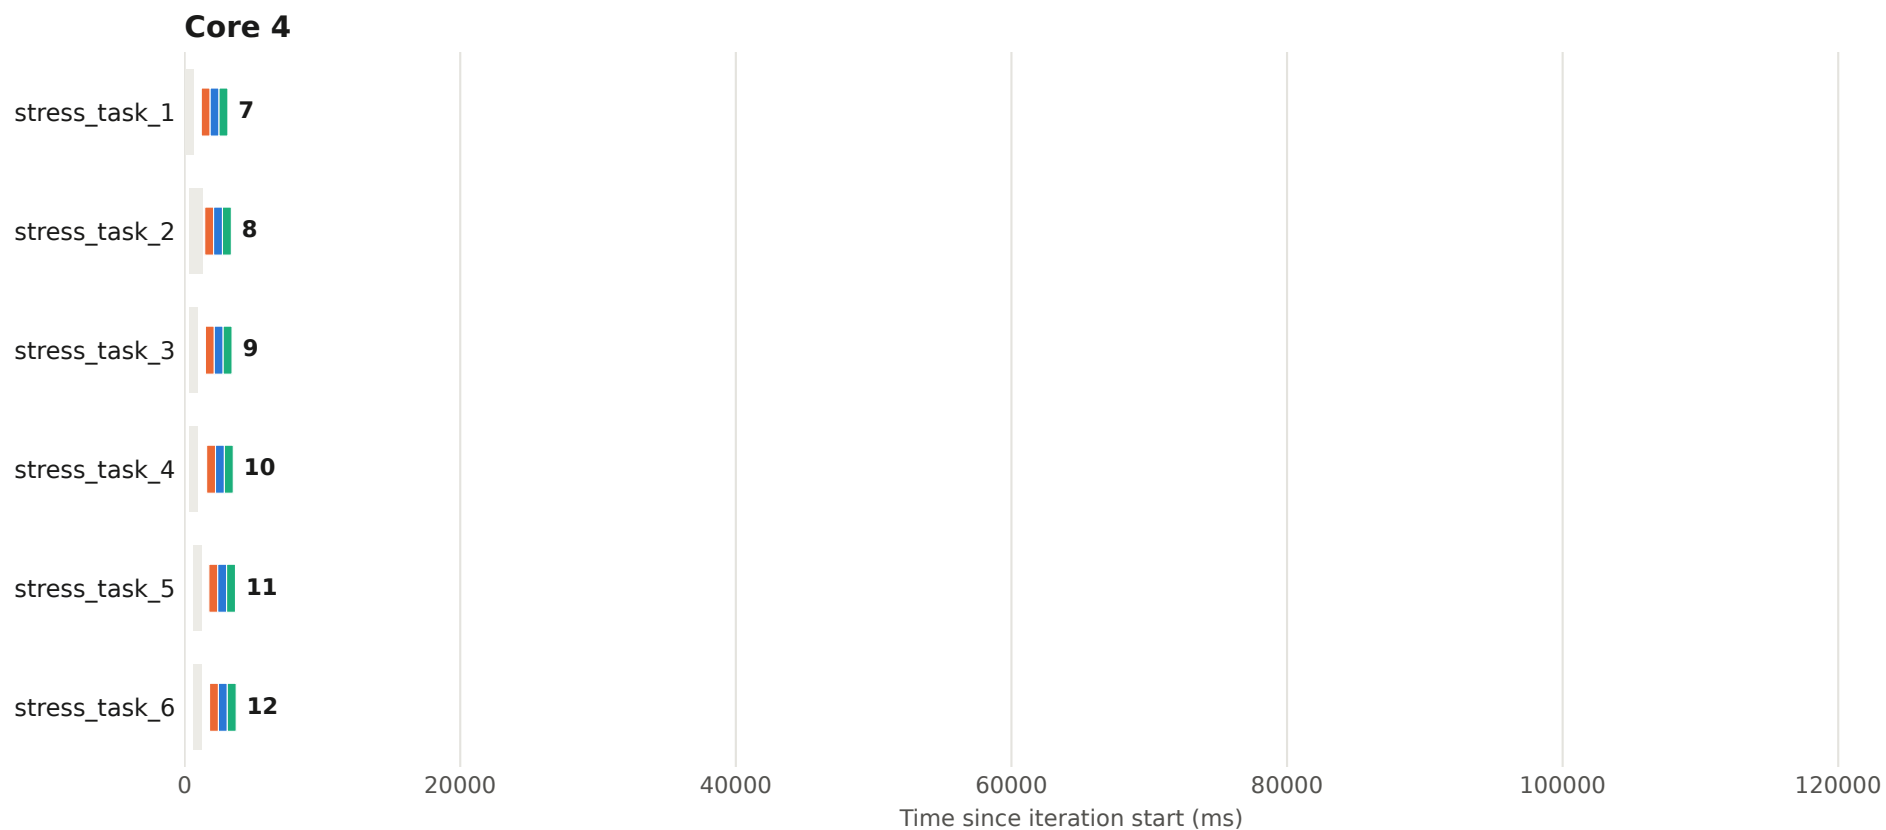


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 84 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

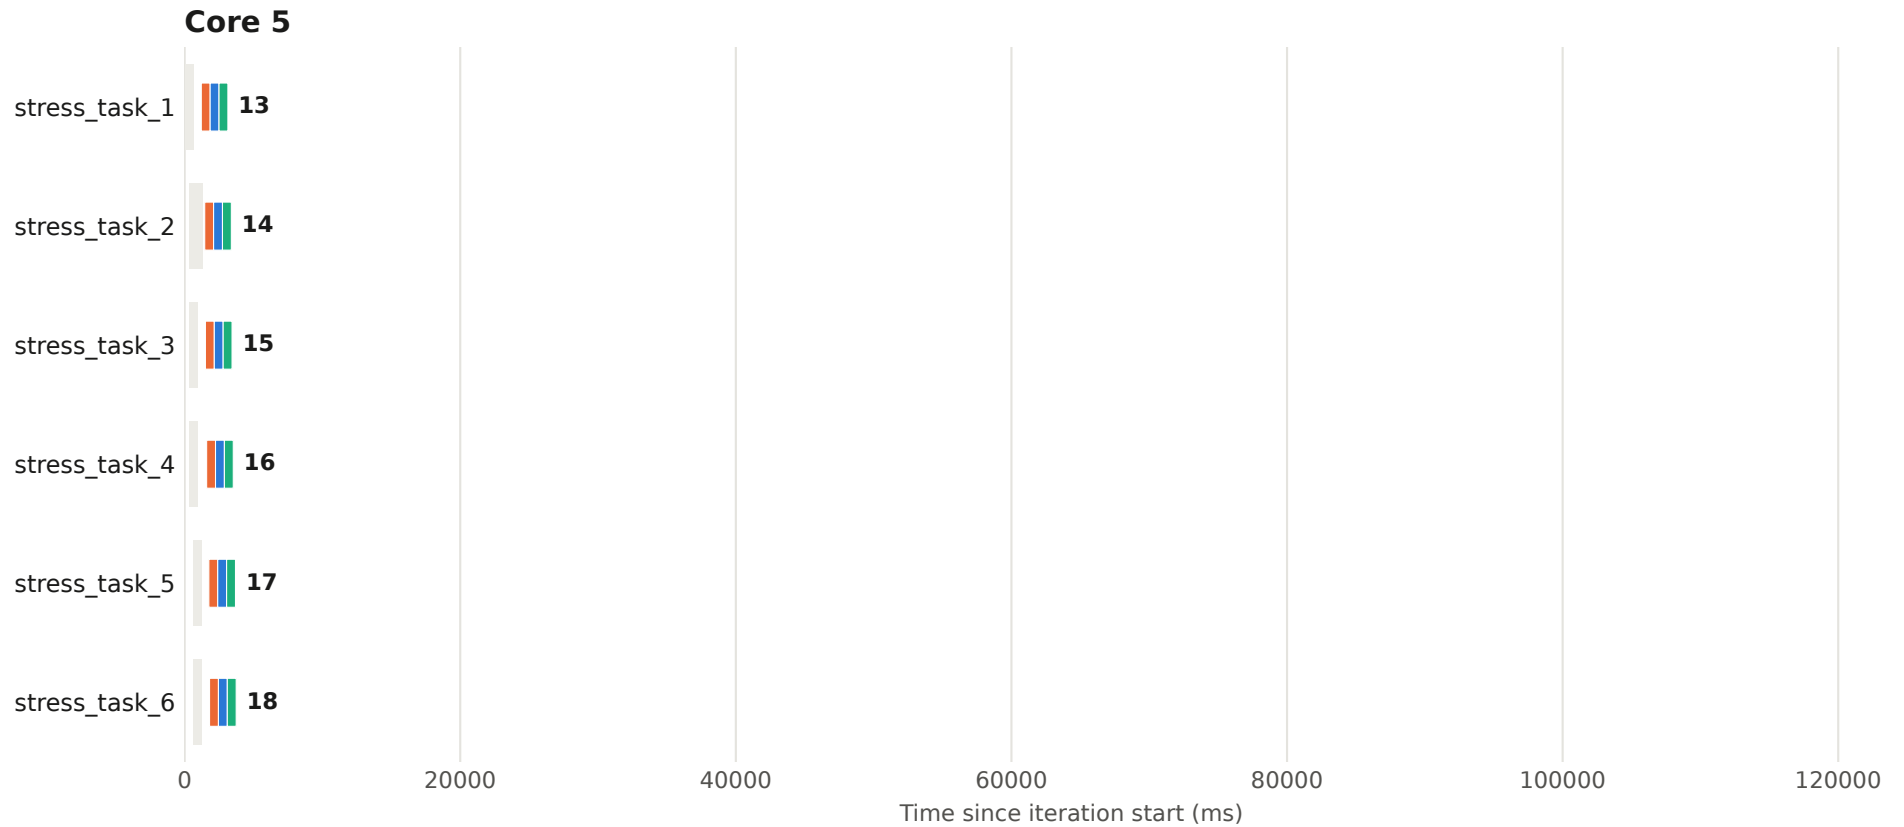


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 84 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

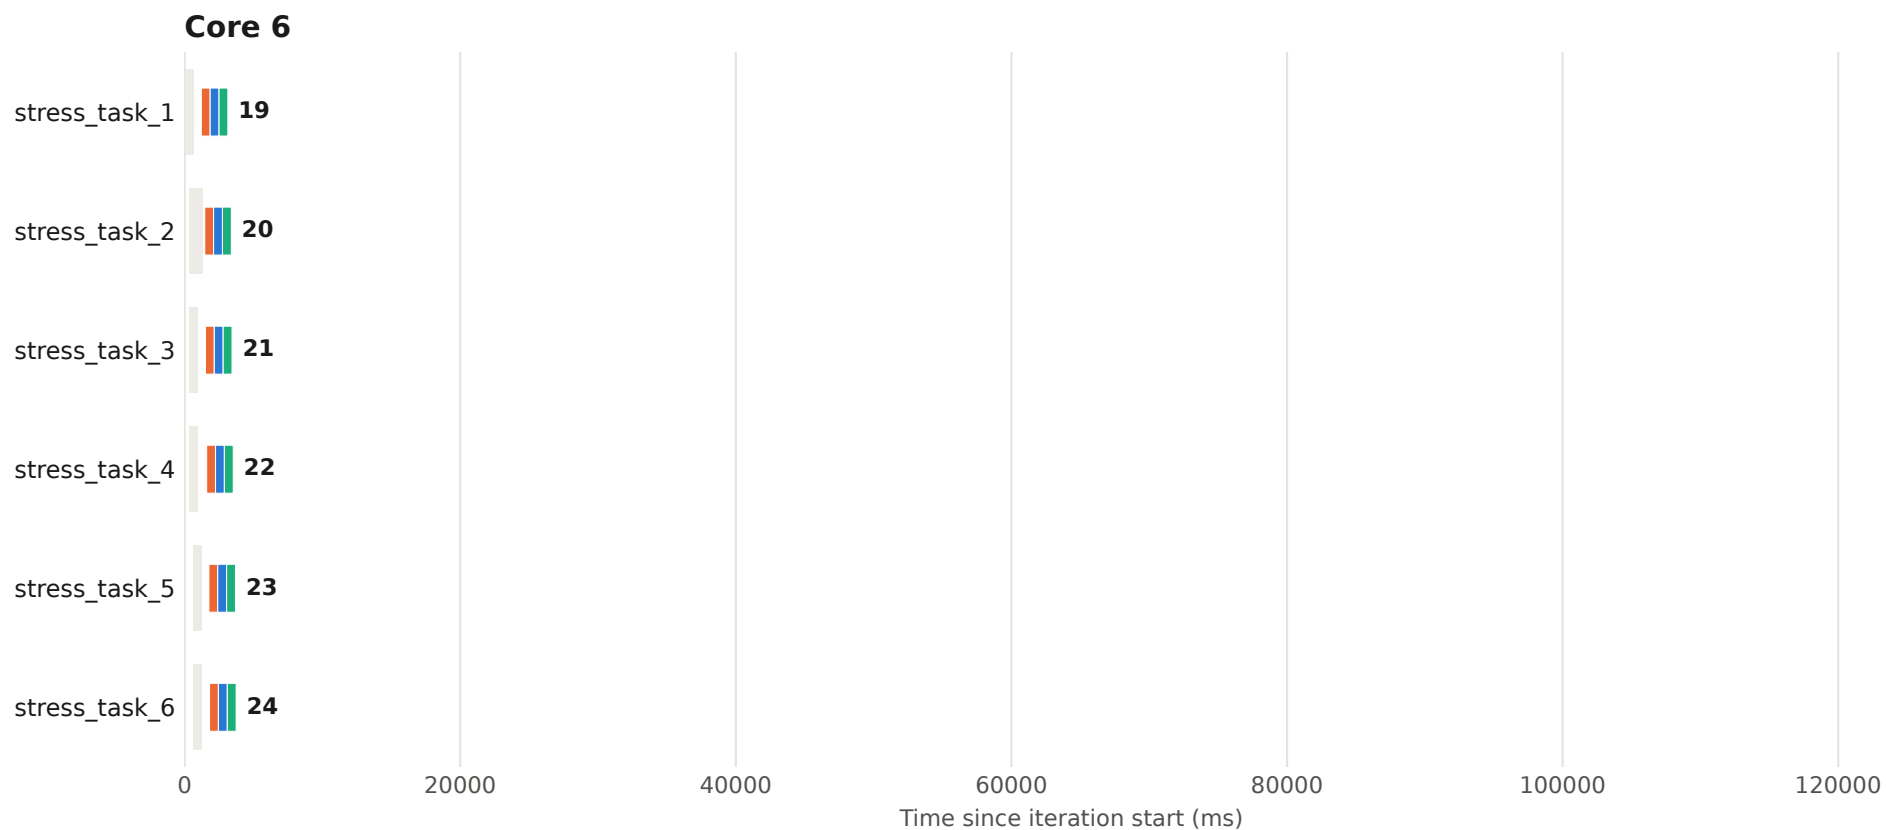


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 84 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

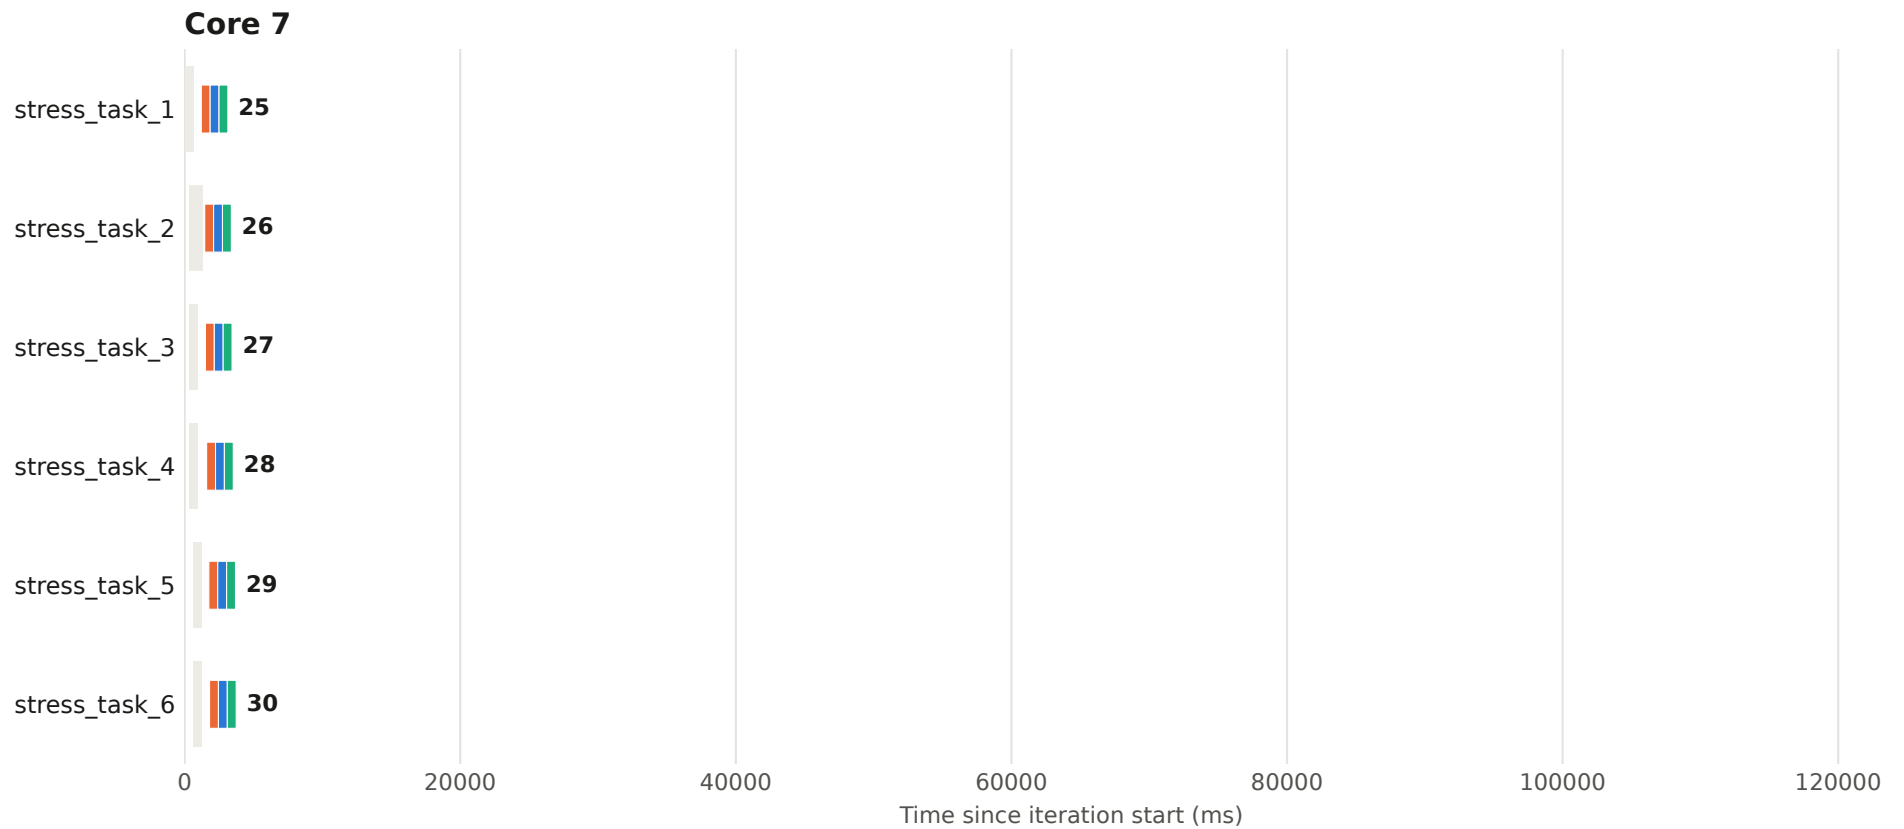


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 85 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

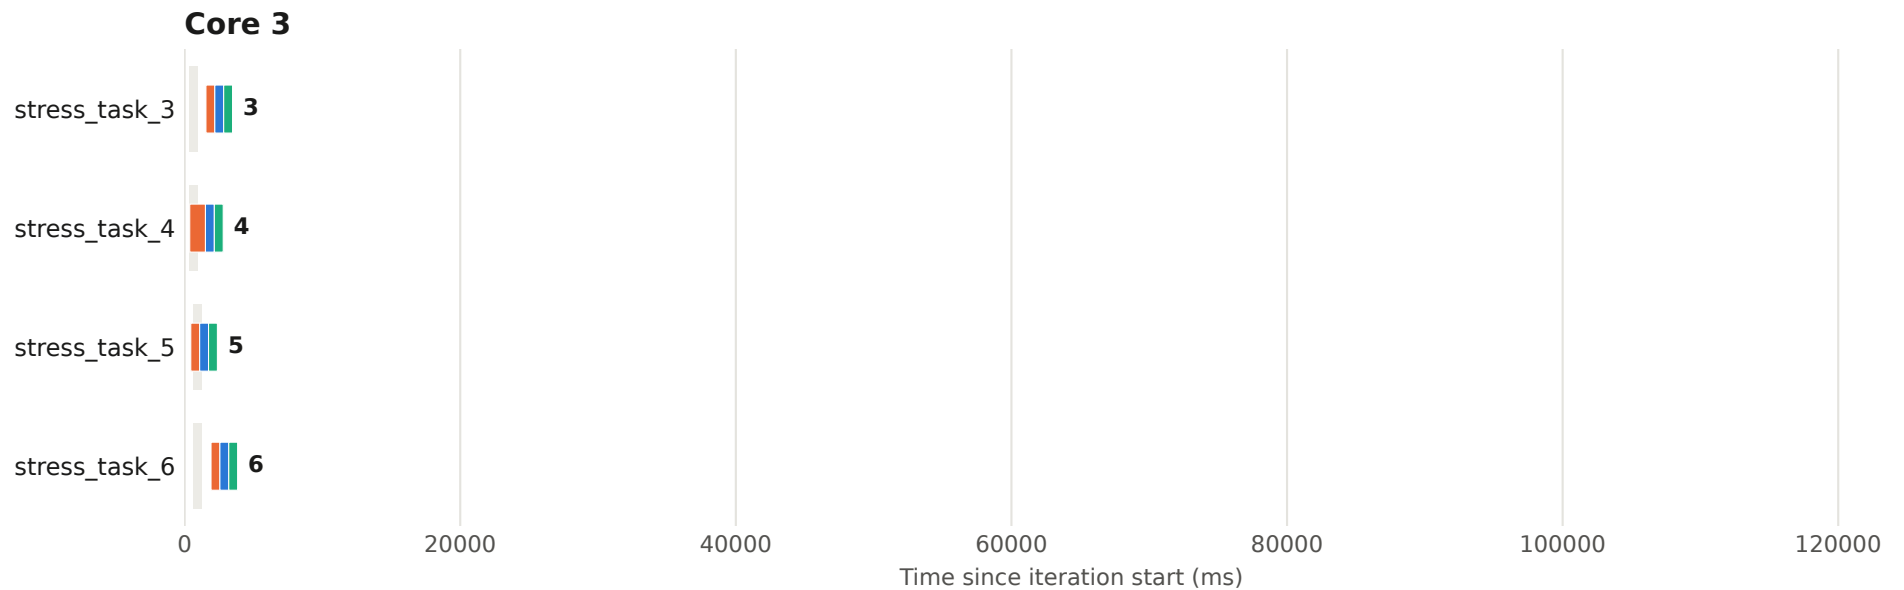

Execution plan - iteration 85 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

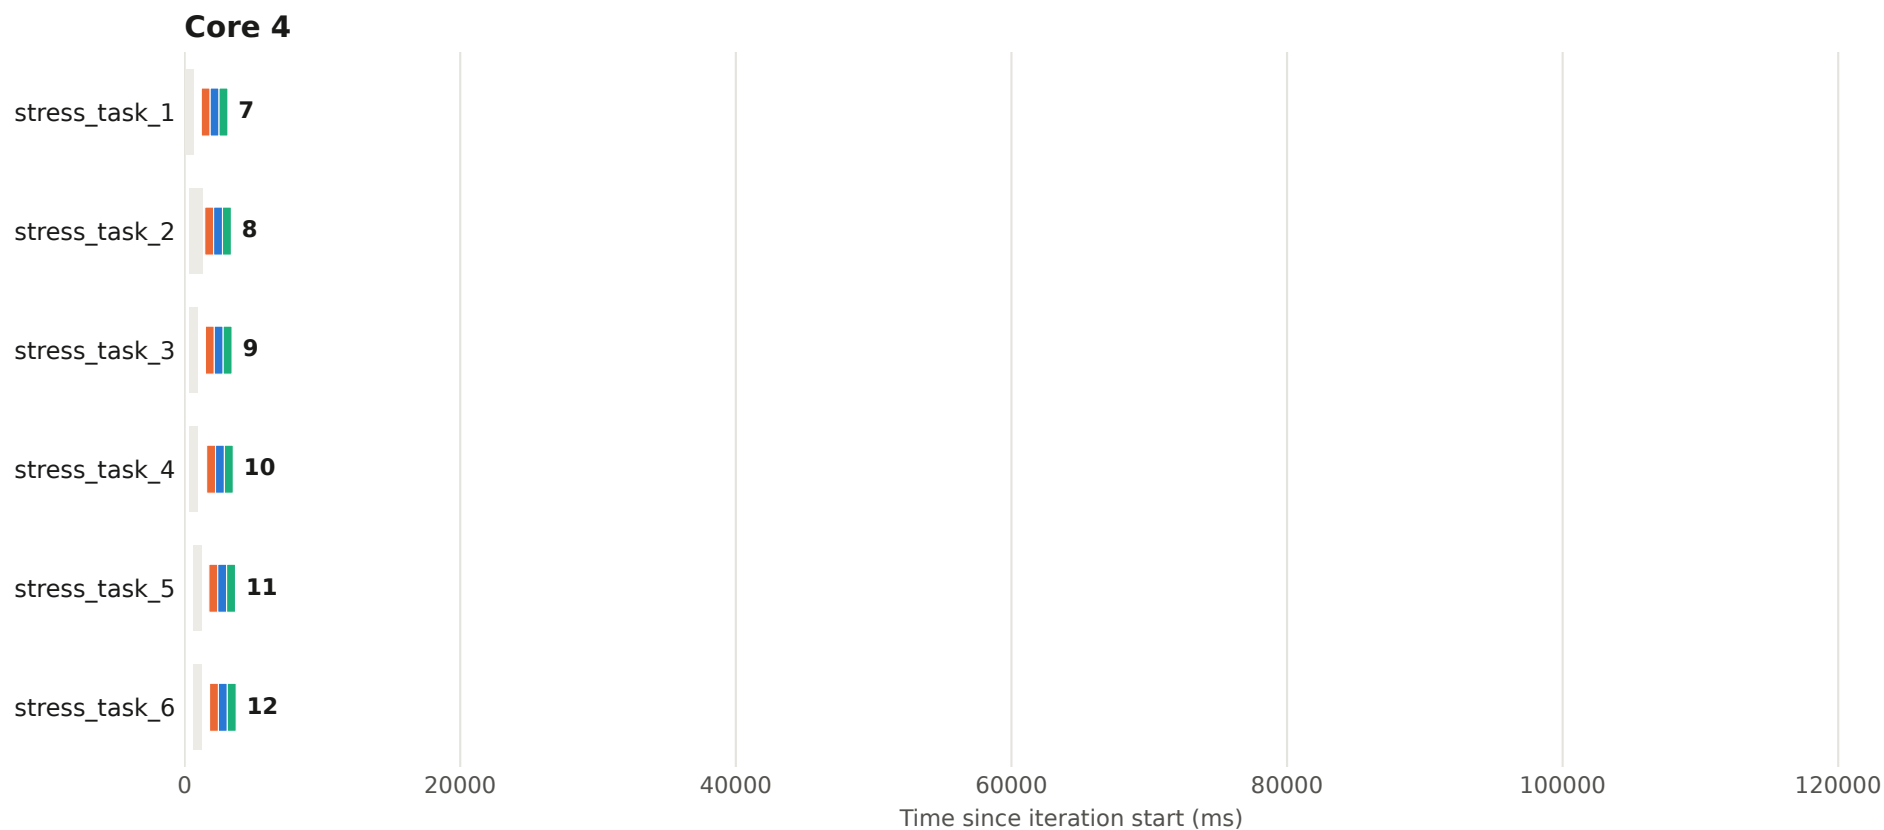


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 85 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

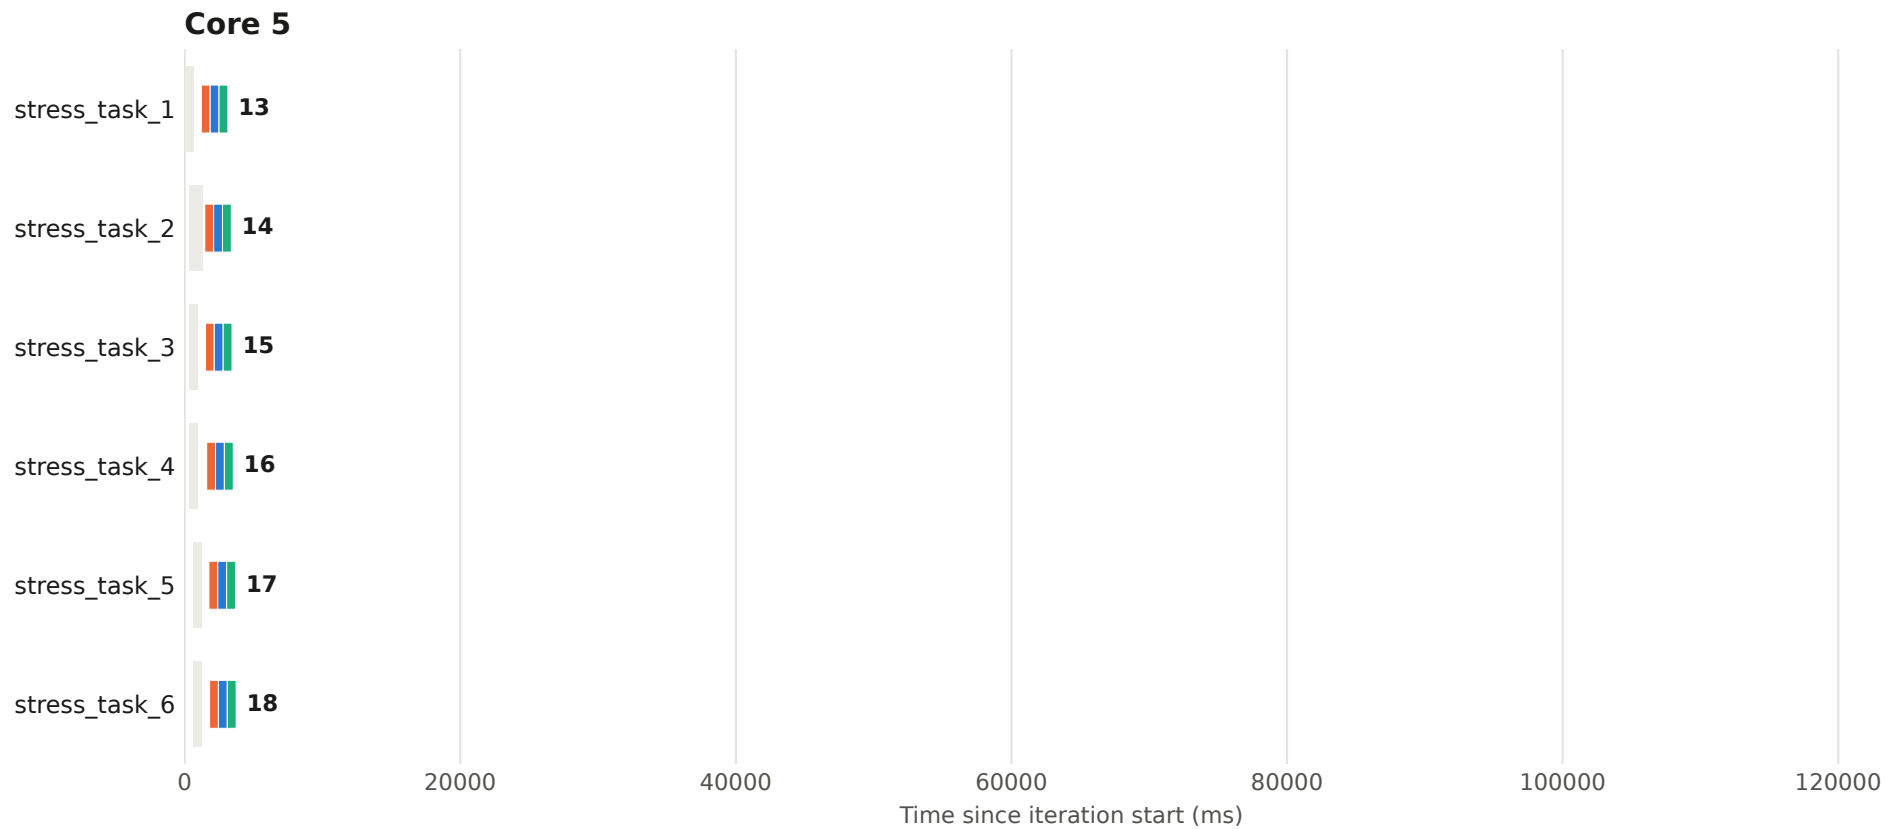


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 85 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

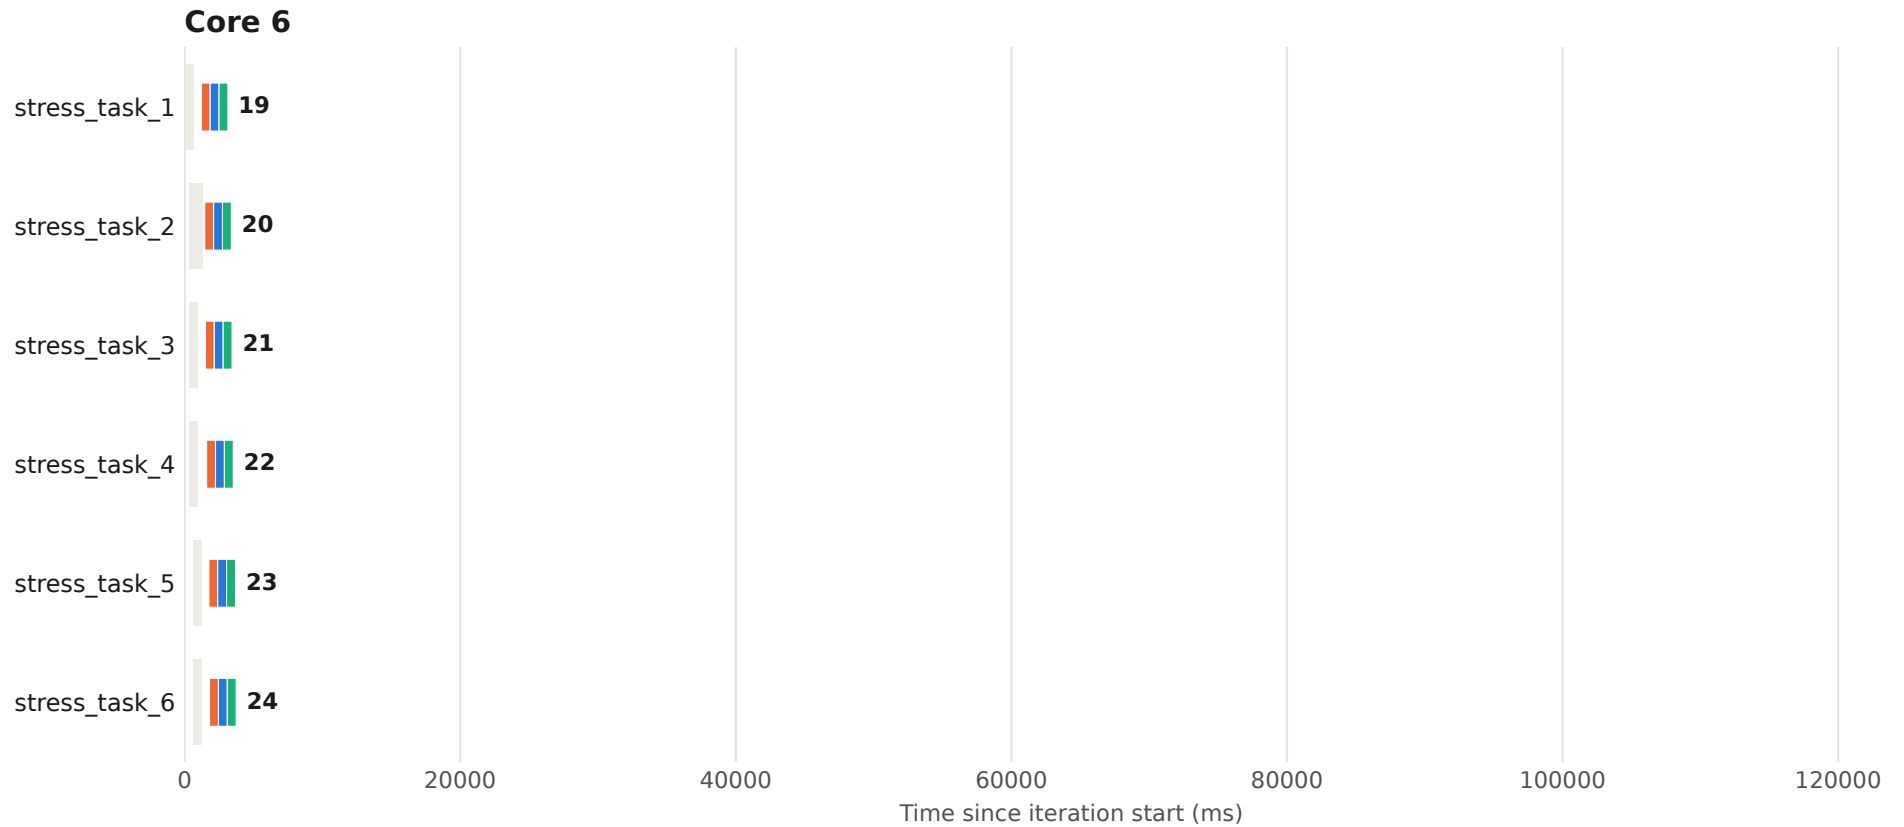


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 85 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

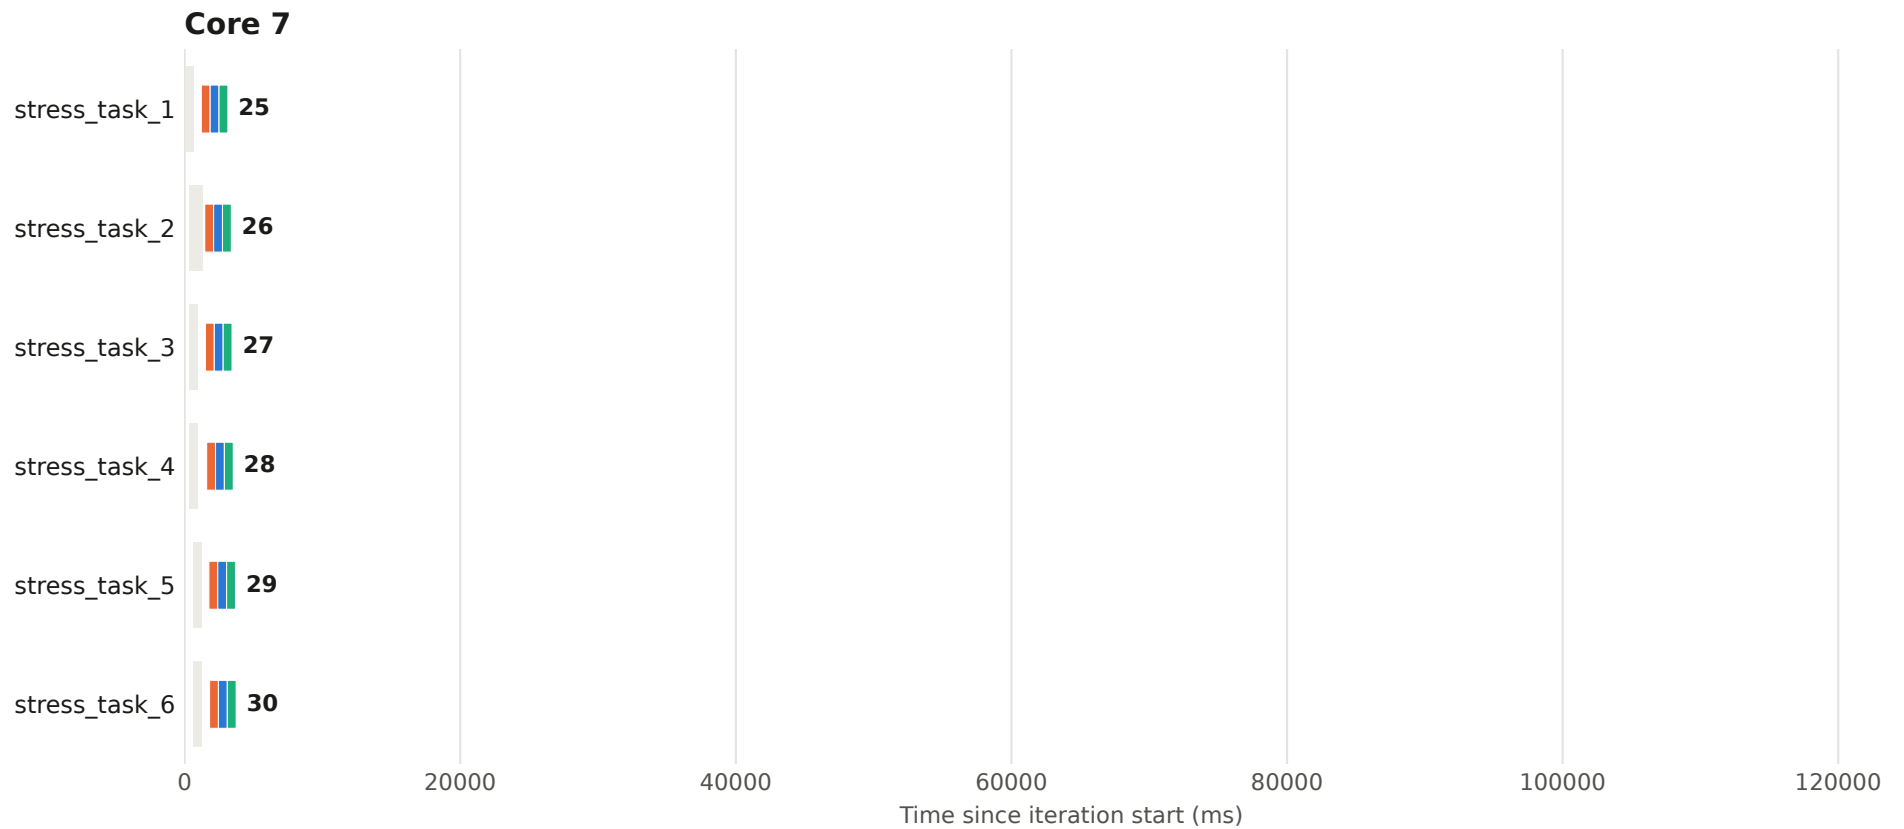


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 86 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

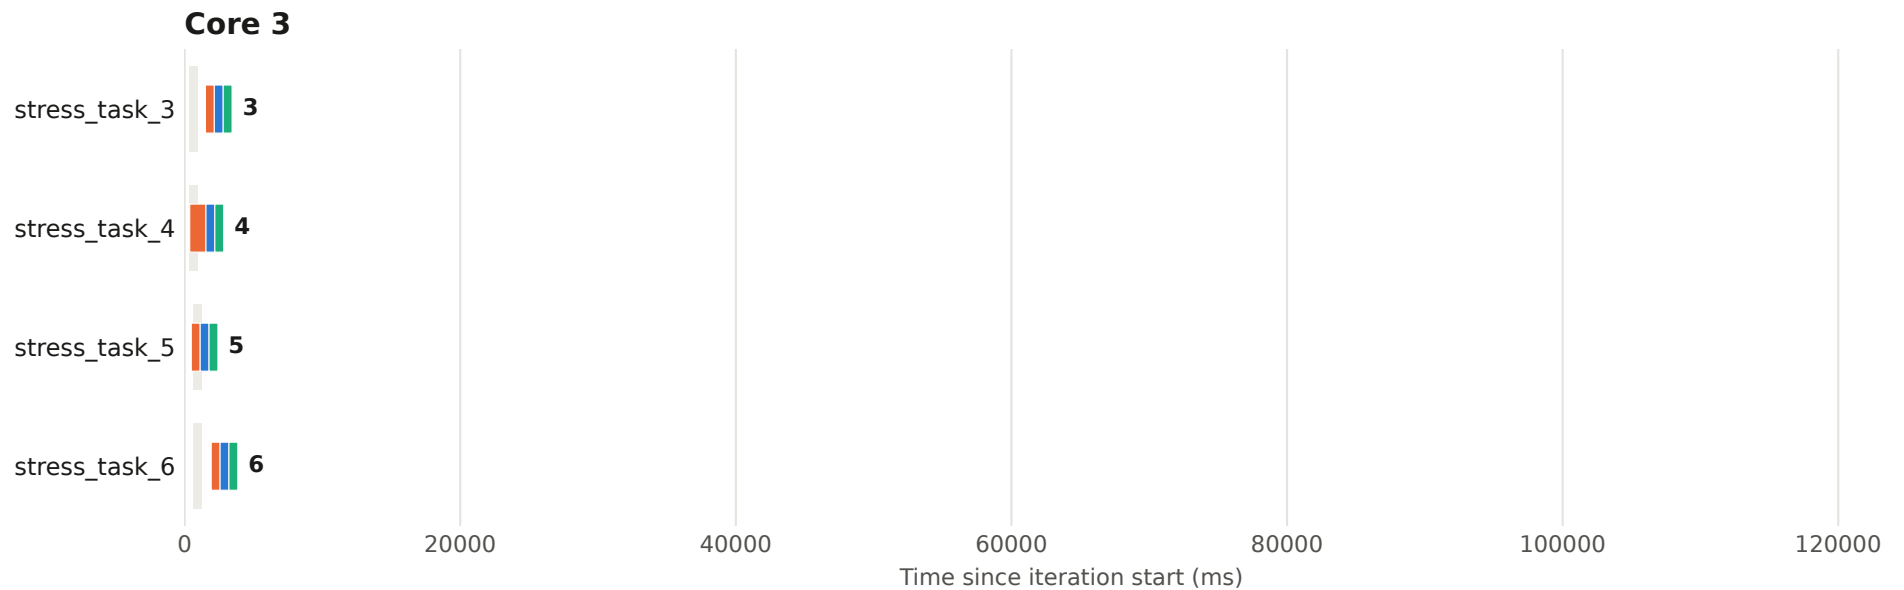


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 86 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

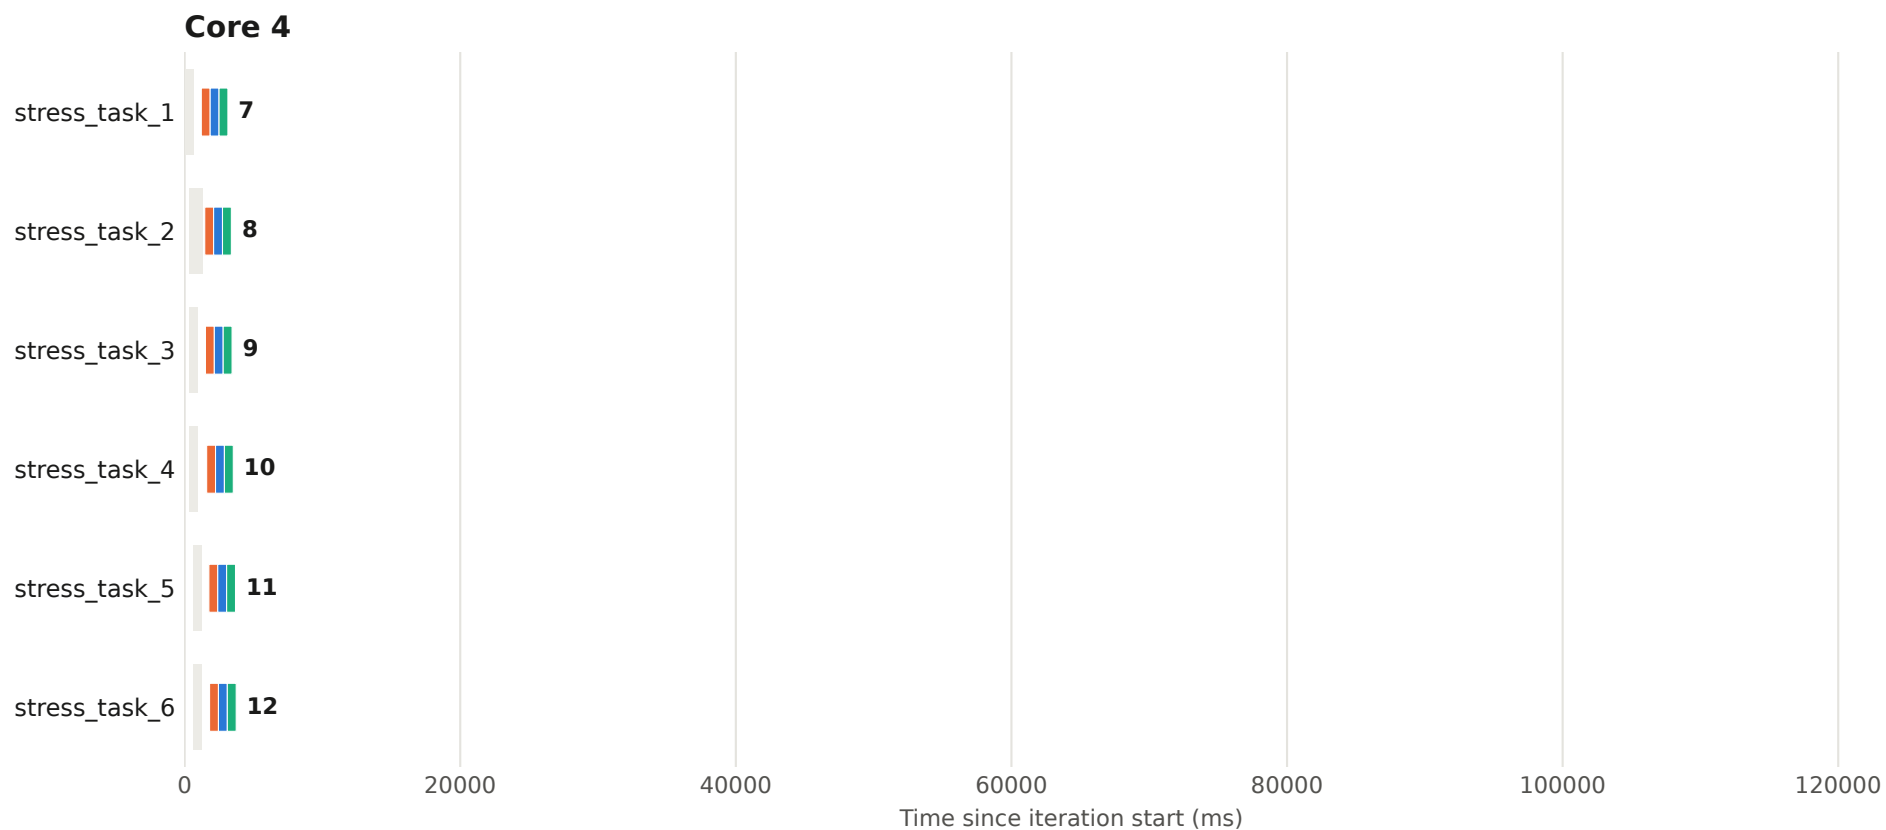


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 86 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

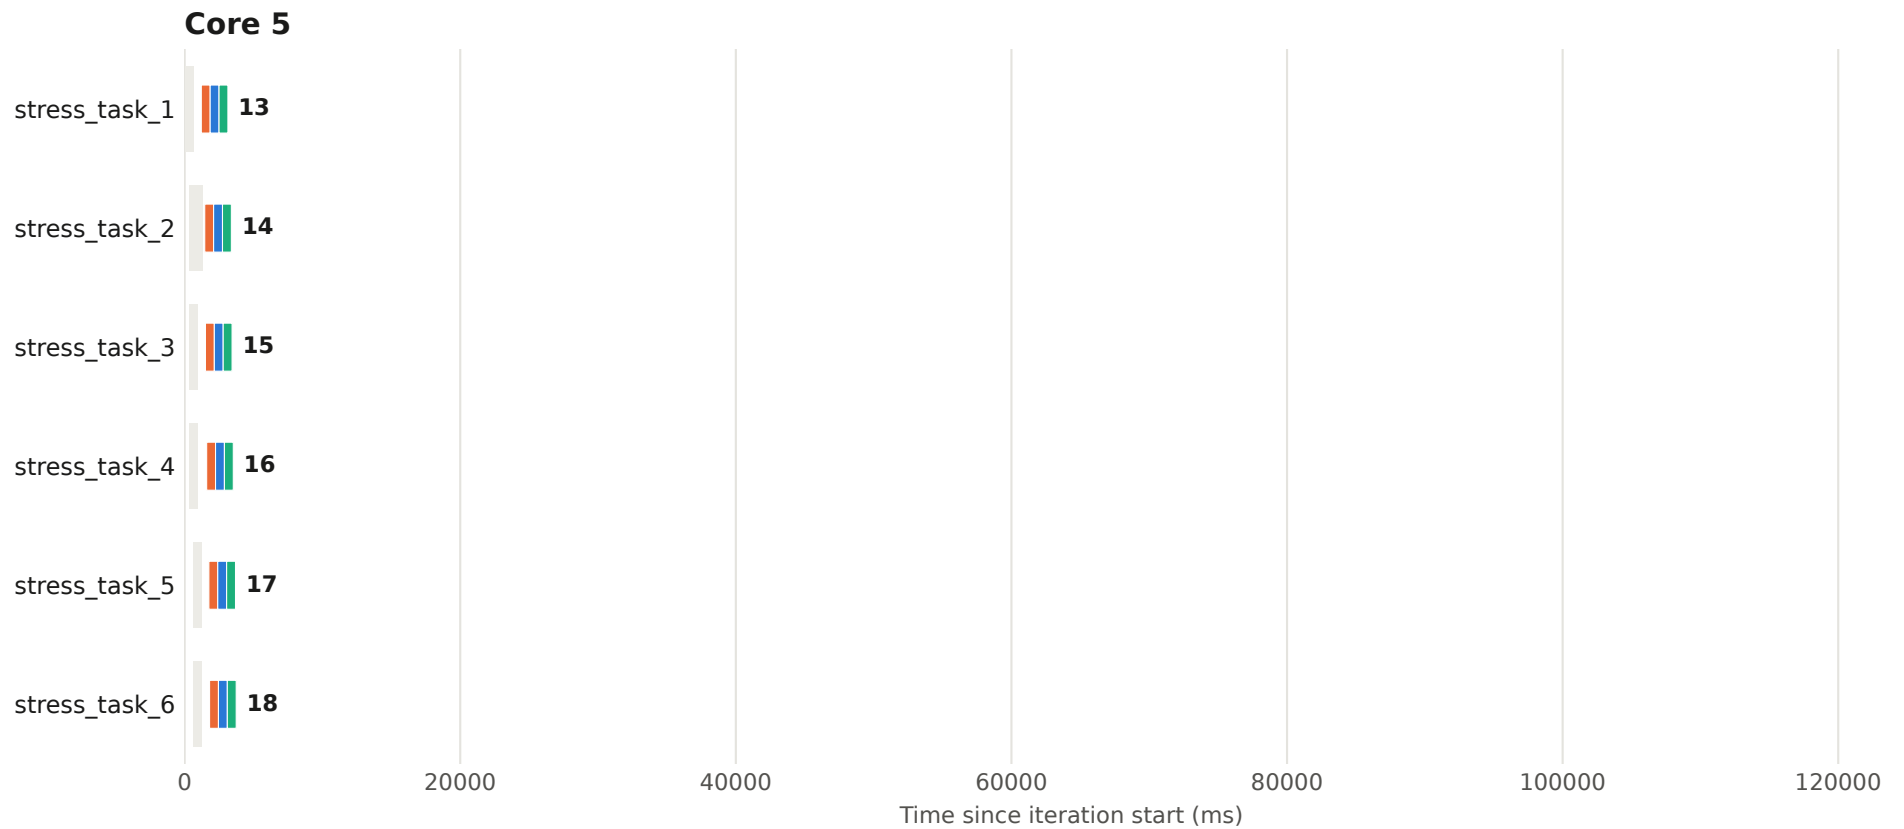


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 86 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

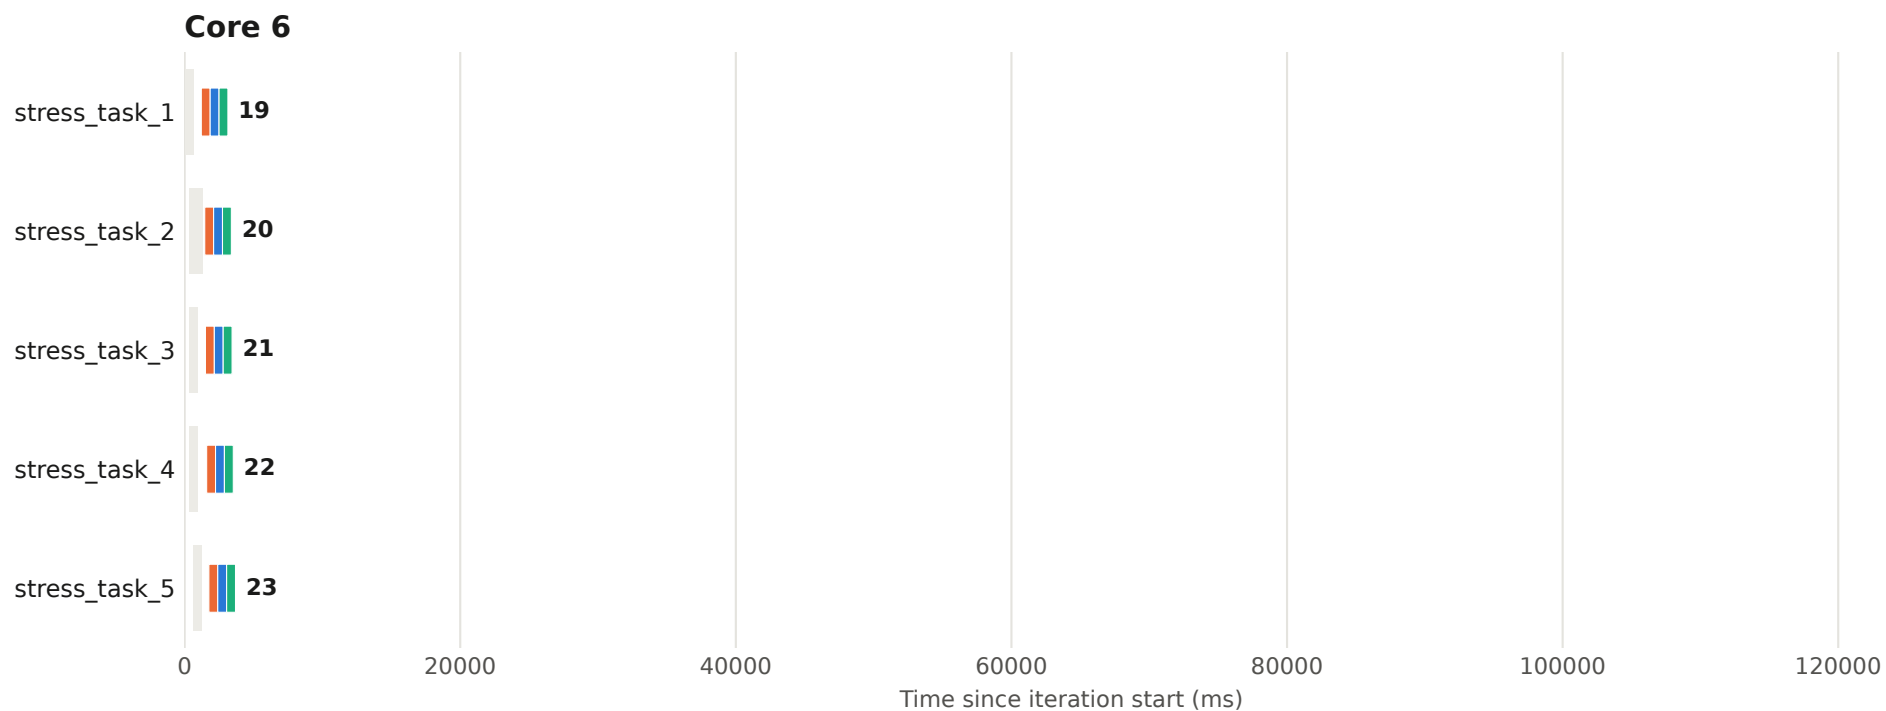


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 86 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

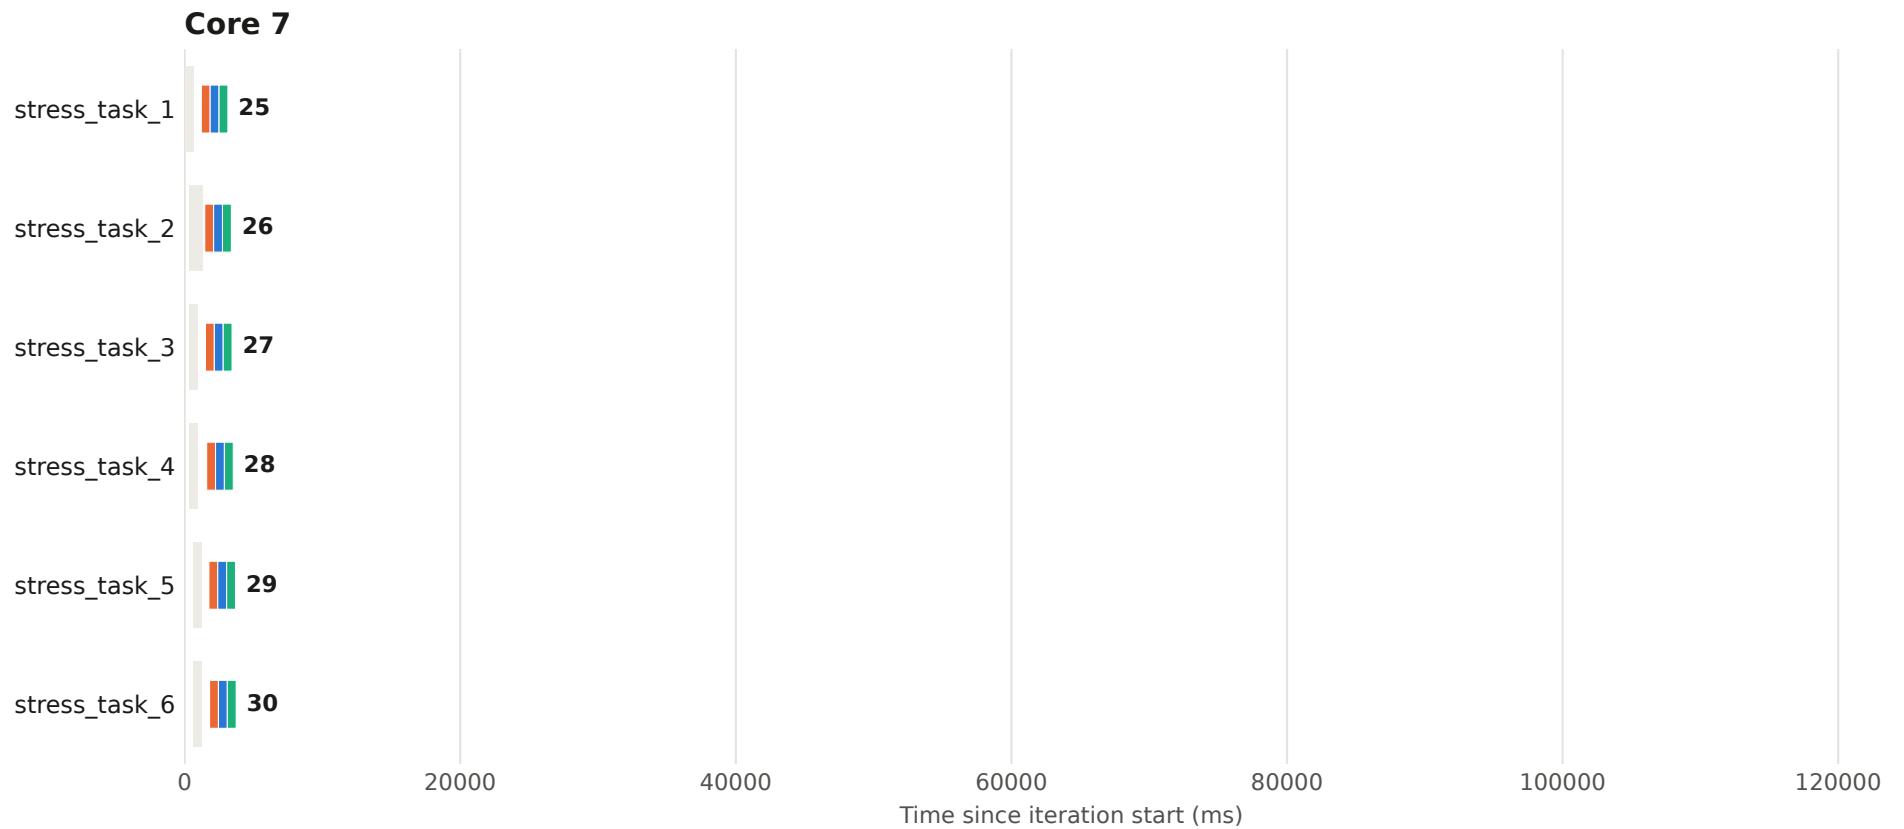


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 86 - core 62026

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

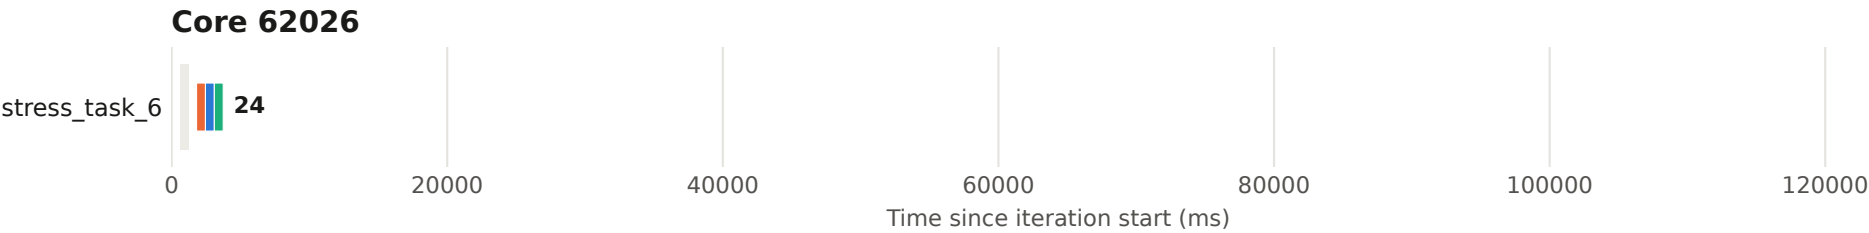

Execution plan - iteration 87 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

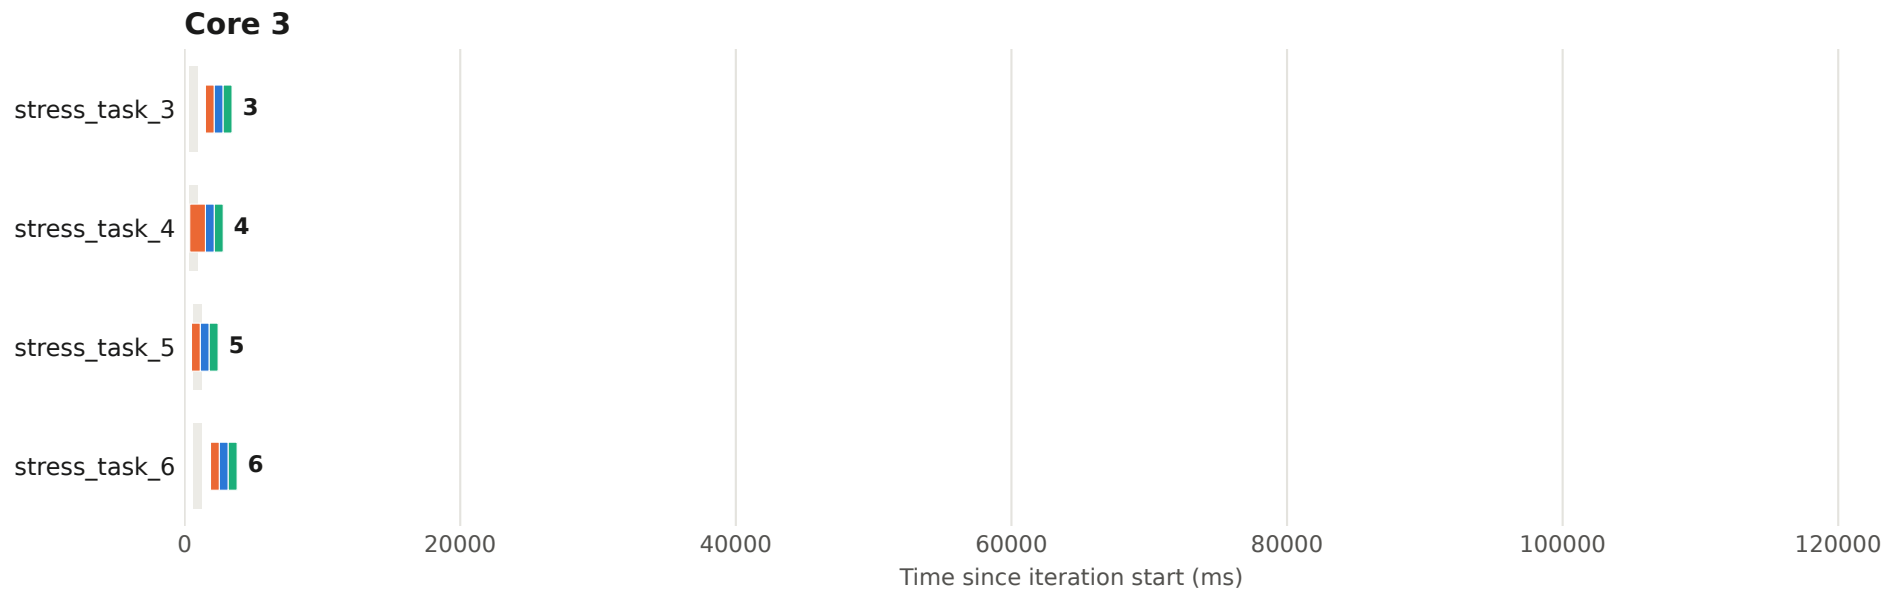

Execution plan - iteration 87 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

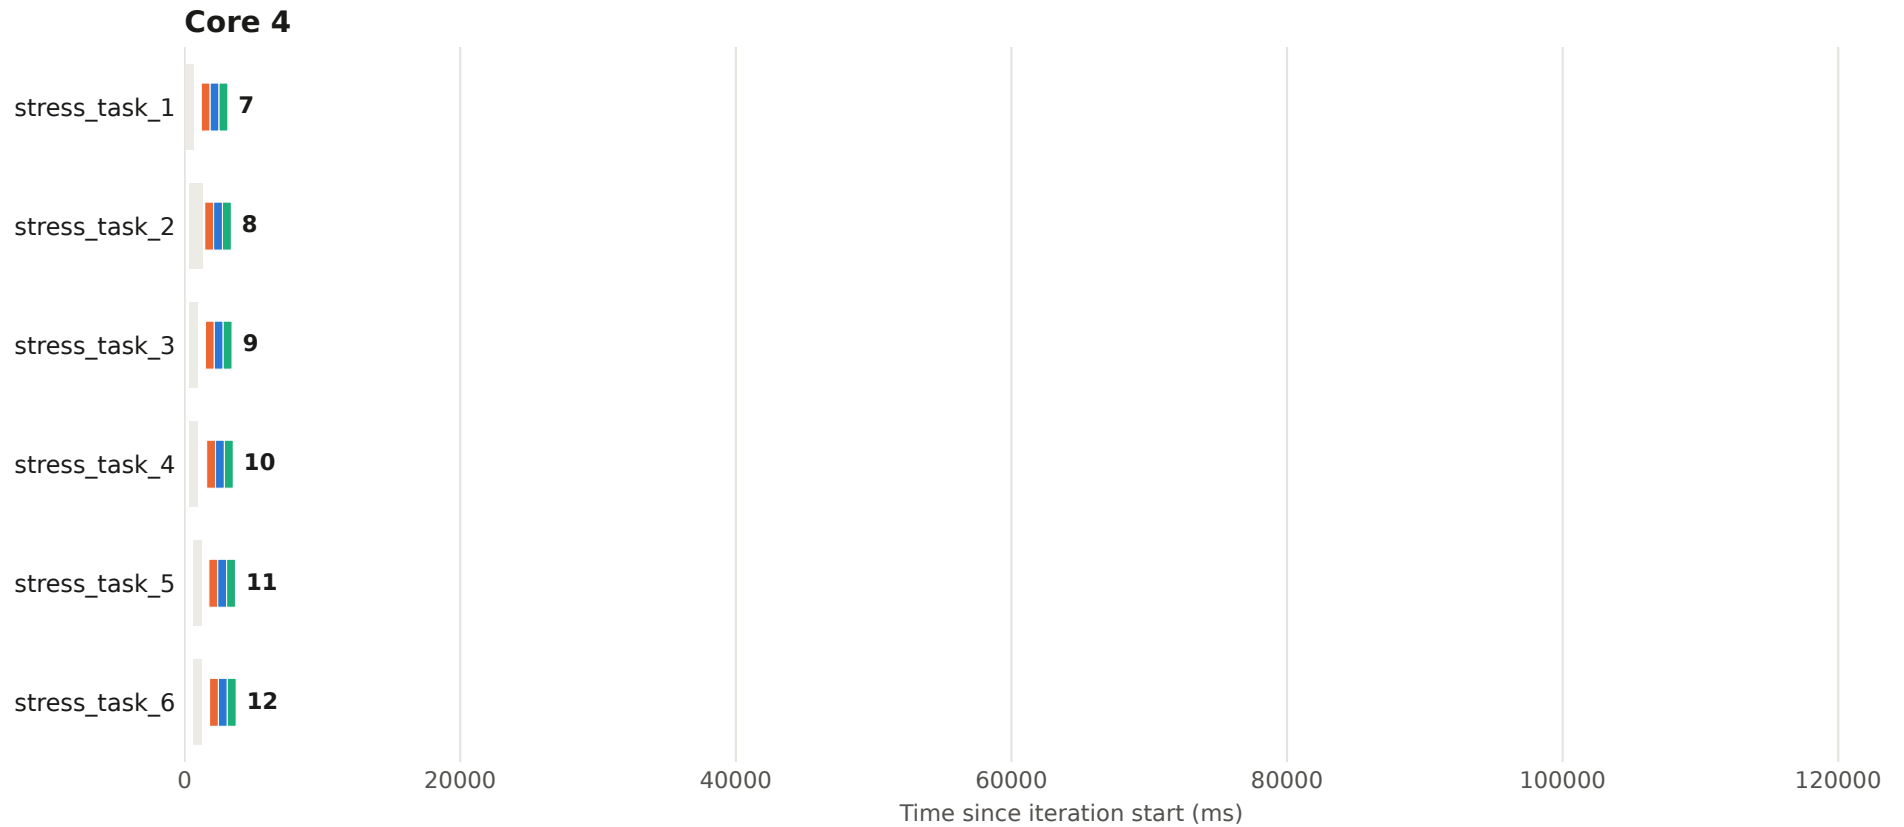


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 87 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

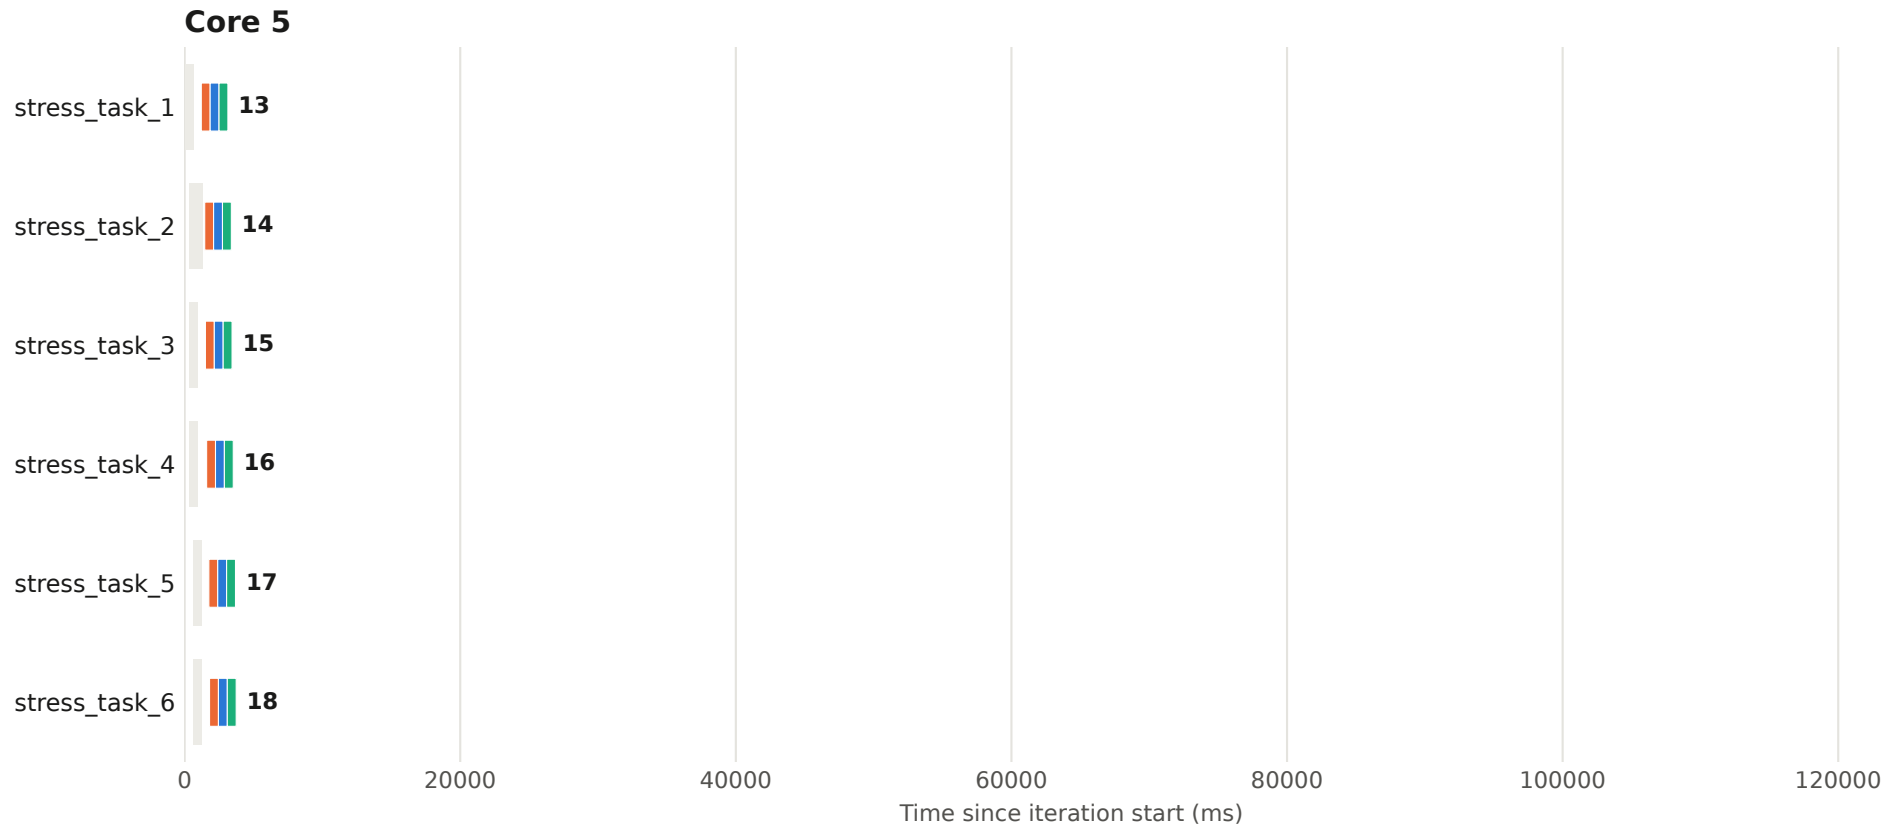


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 87 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

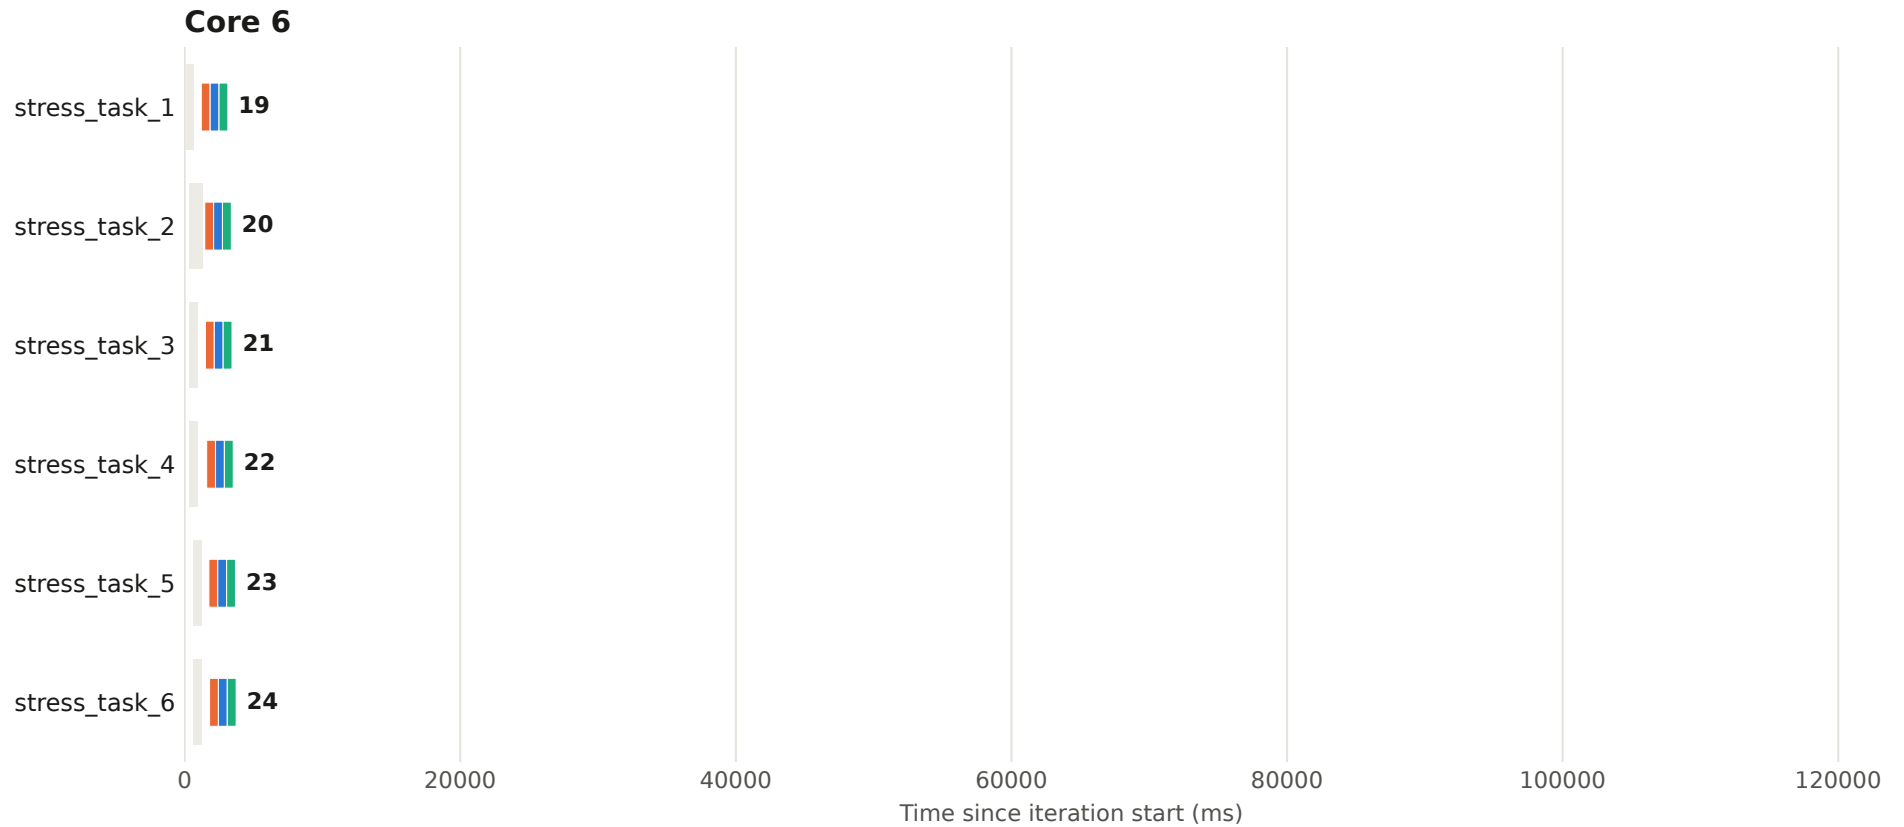


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 87 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

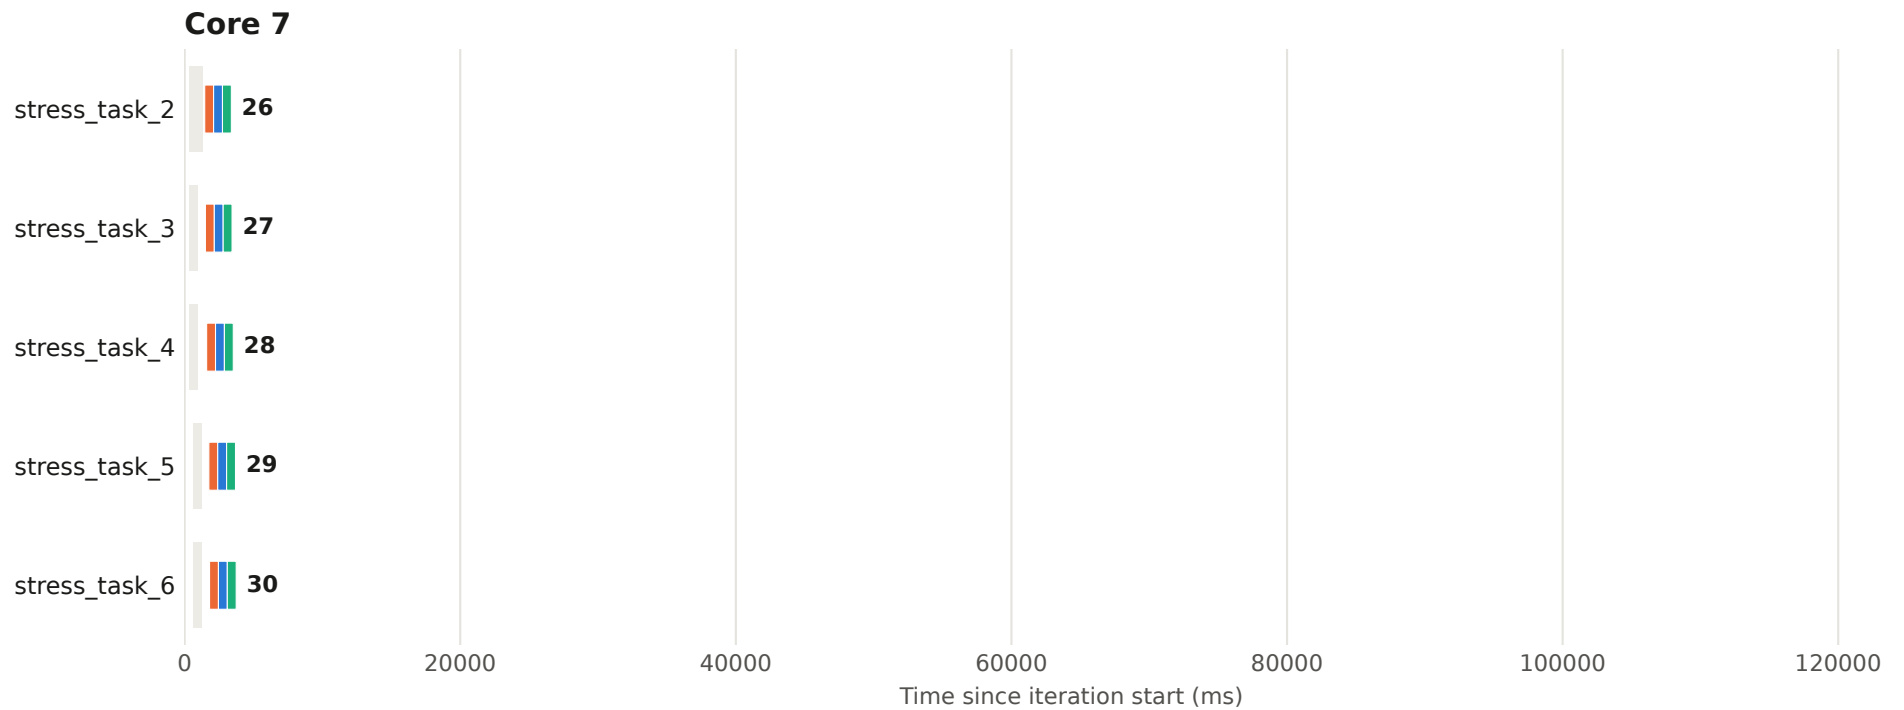


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 88 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

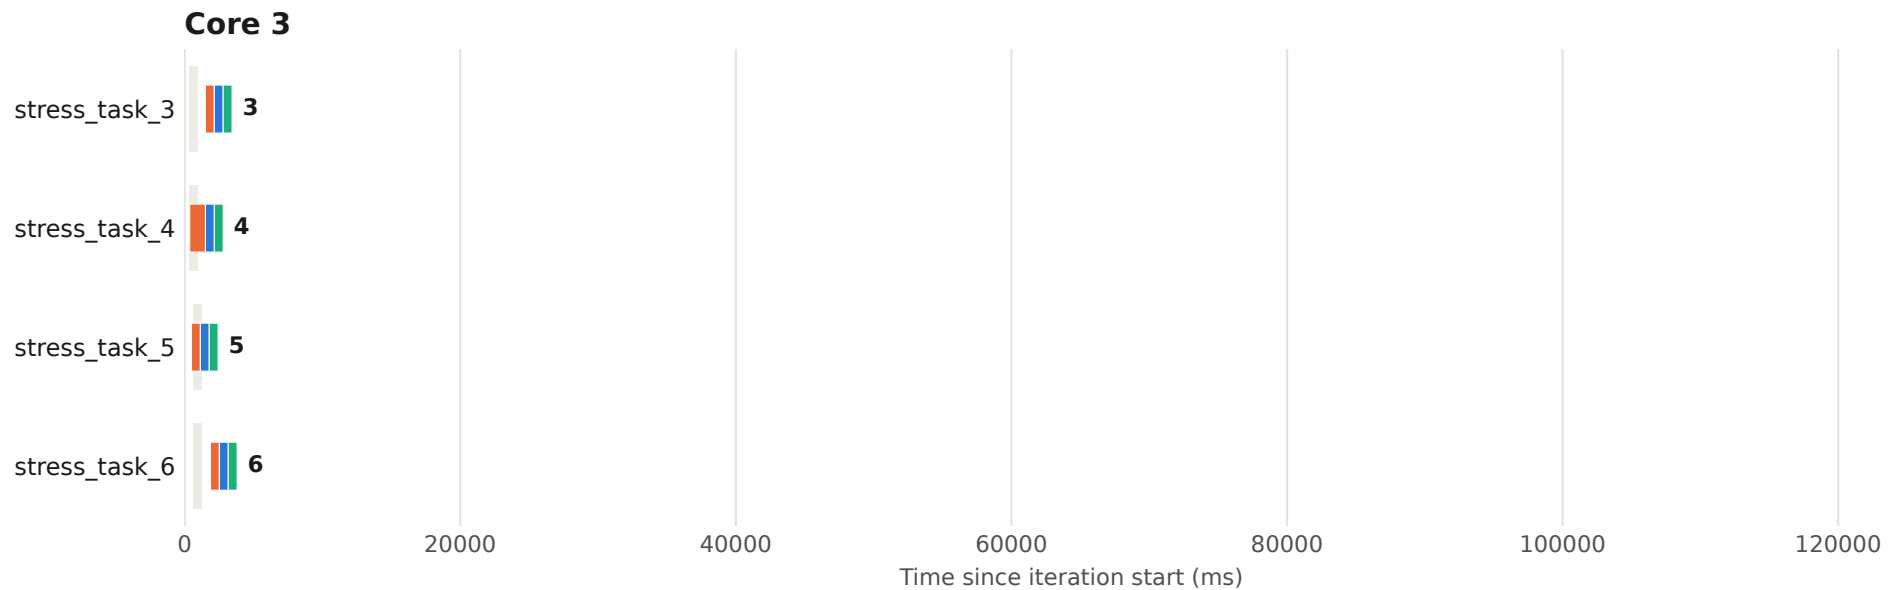

Execution plan - iteration 88 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

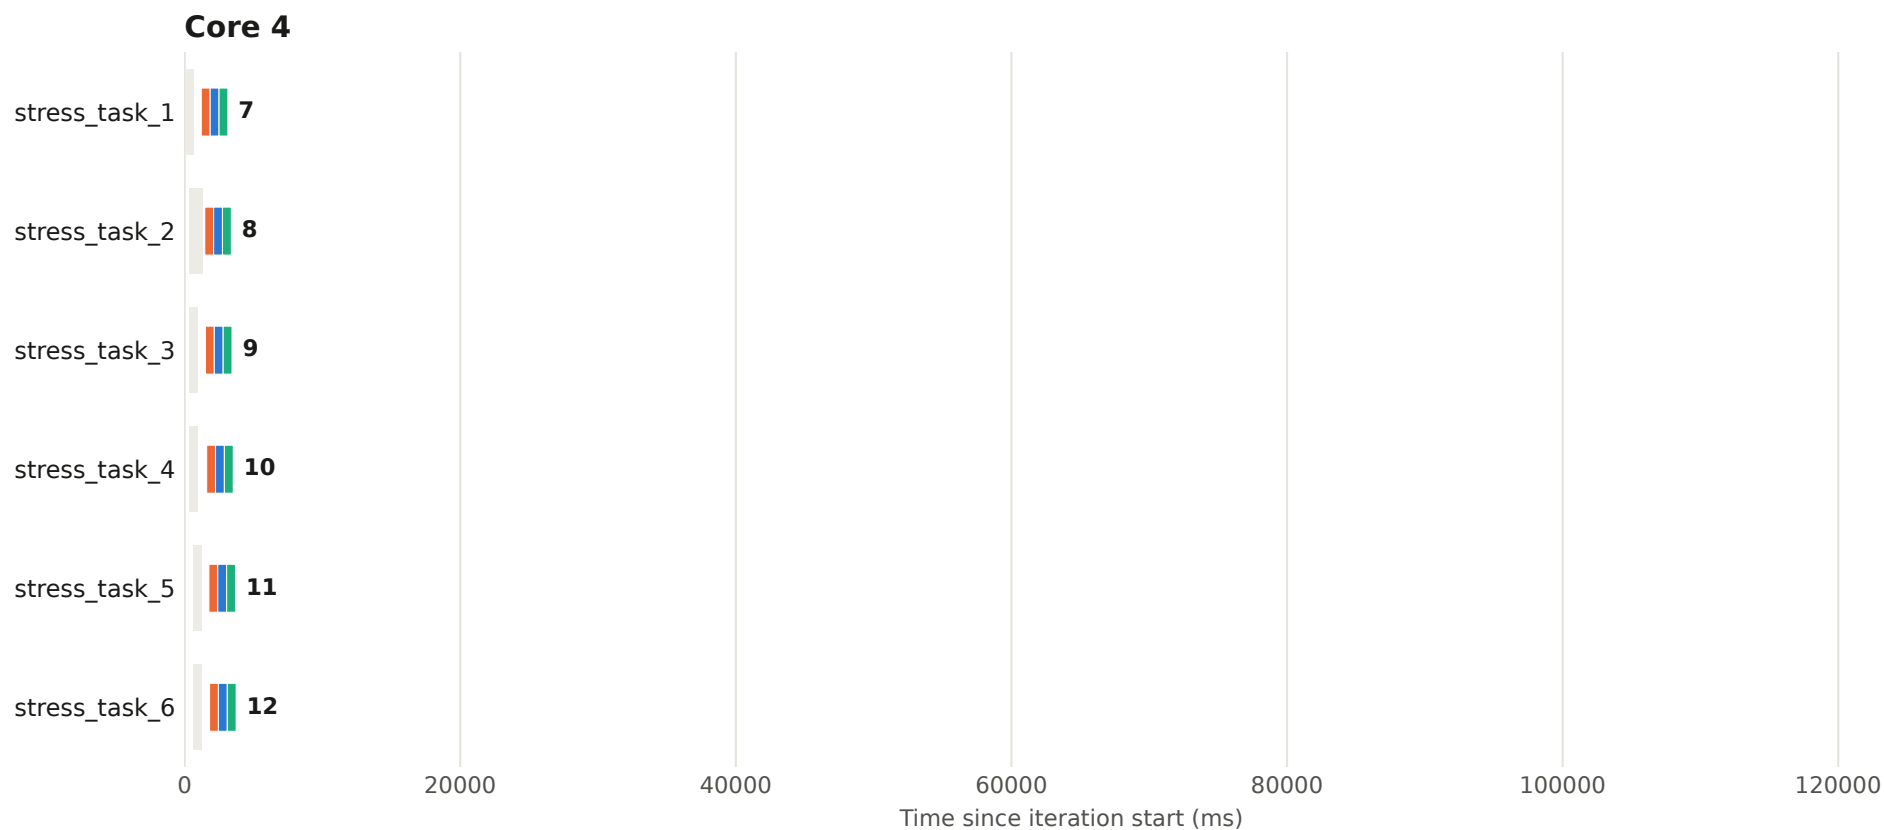


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 88 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

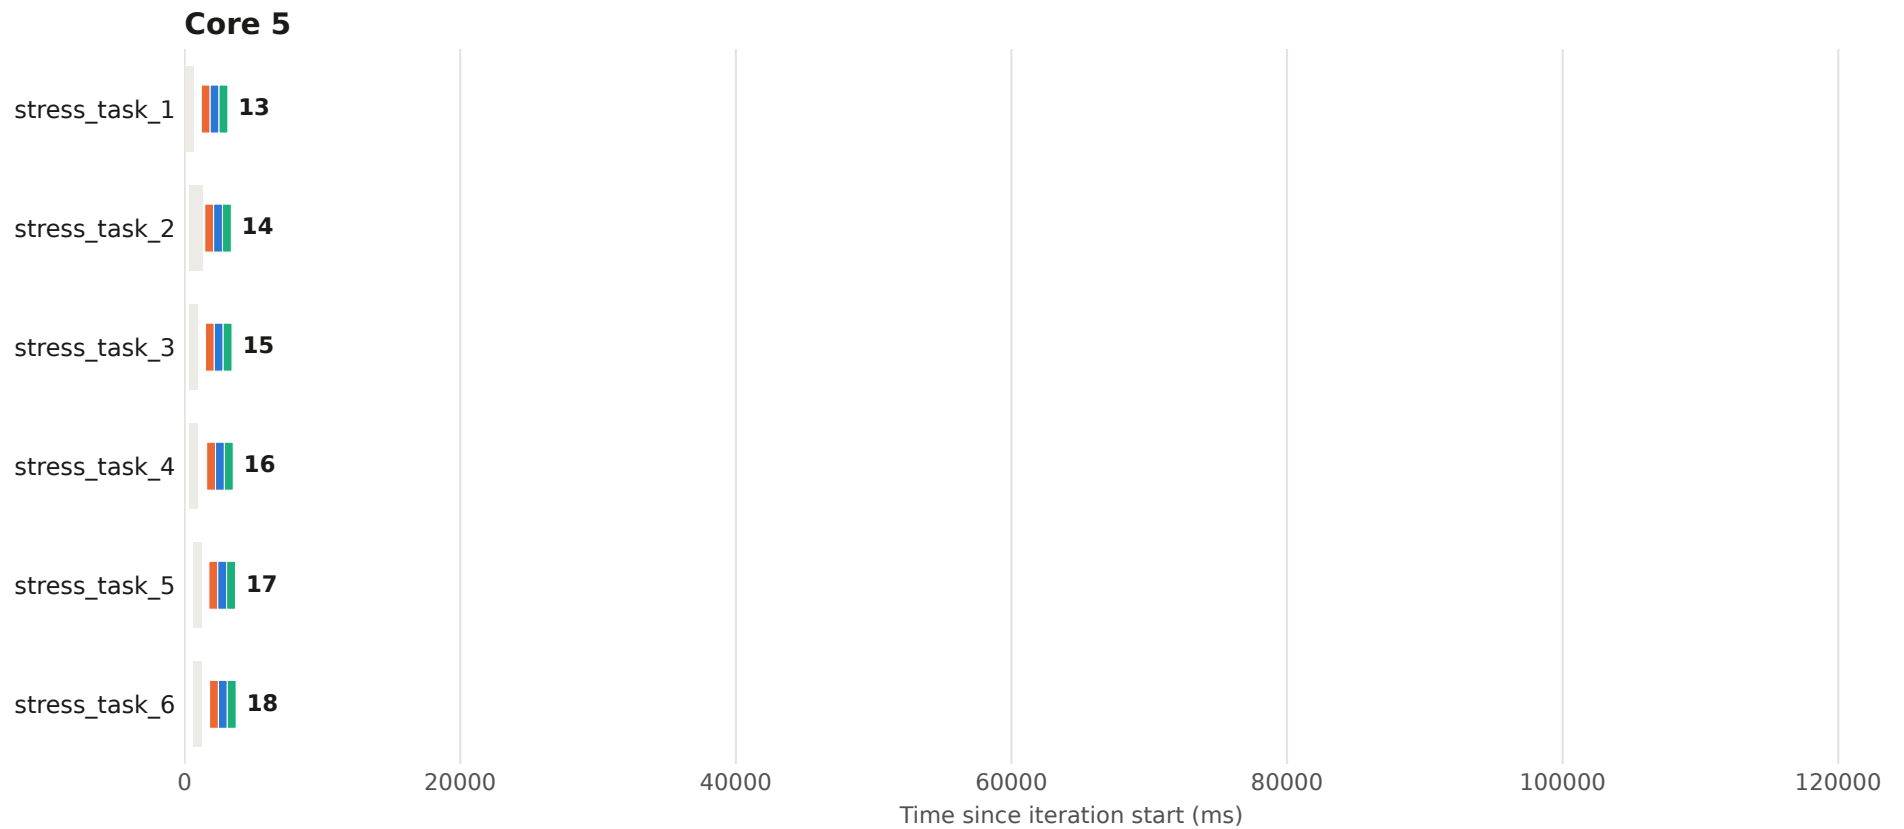


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 88 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

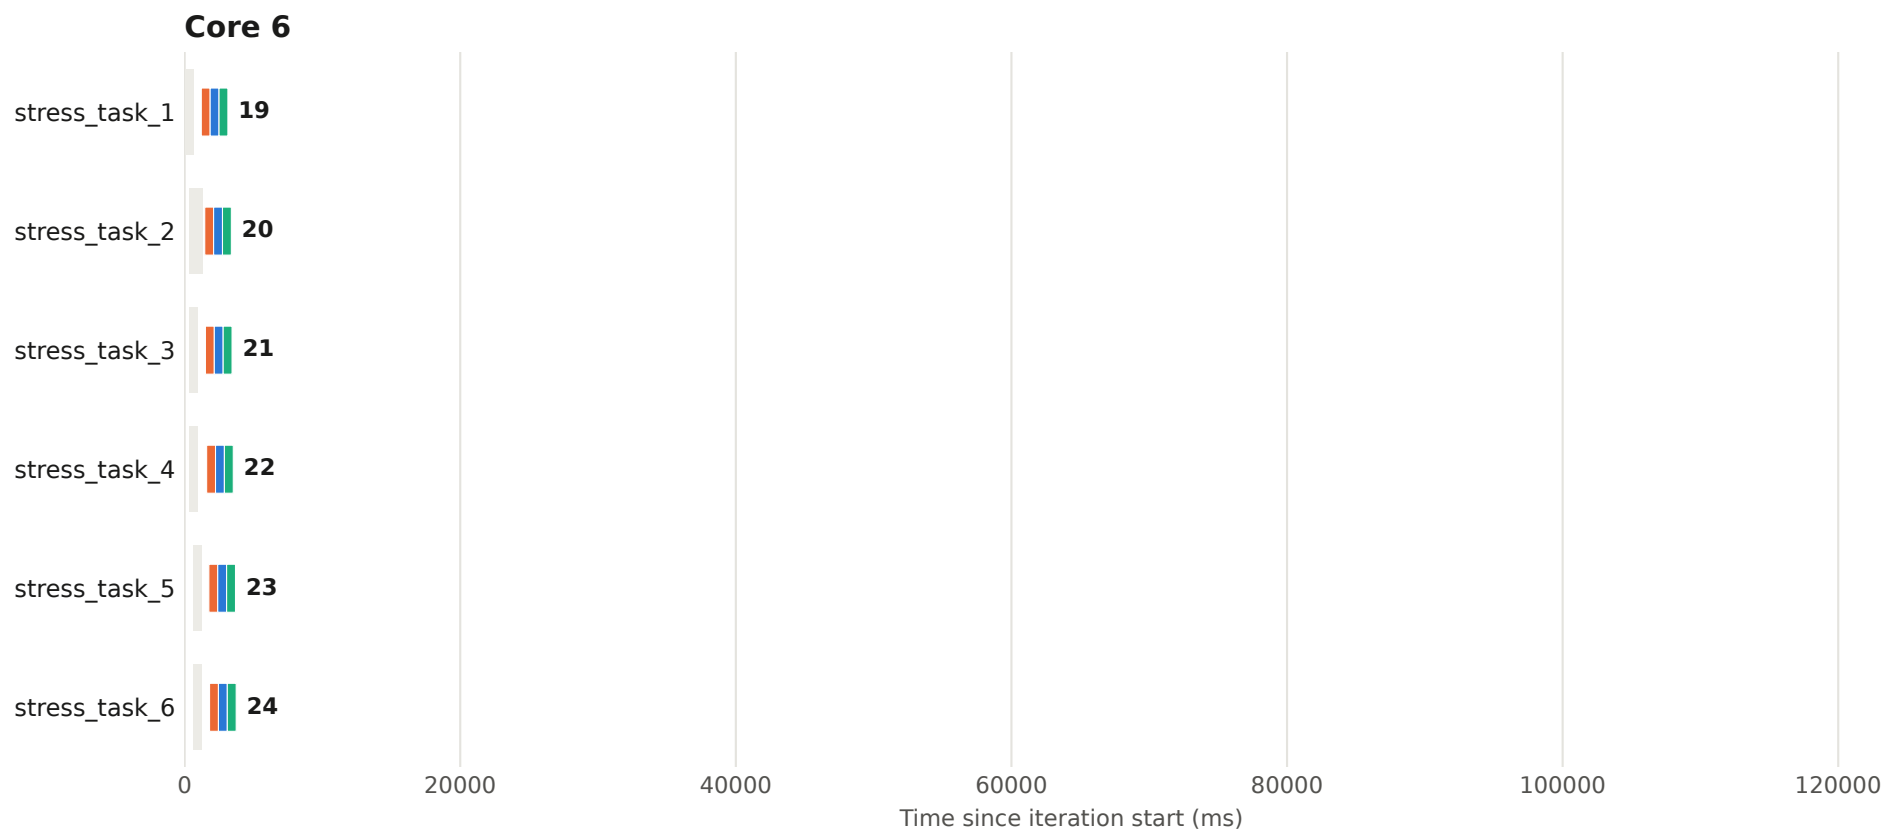


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 88 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

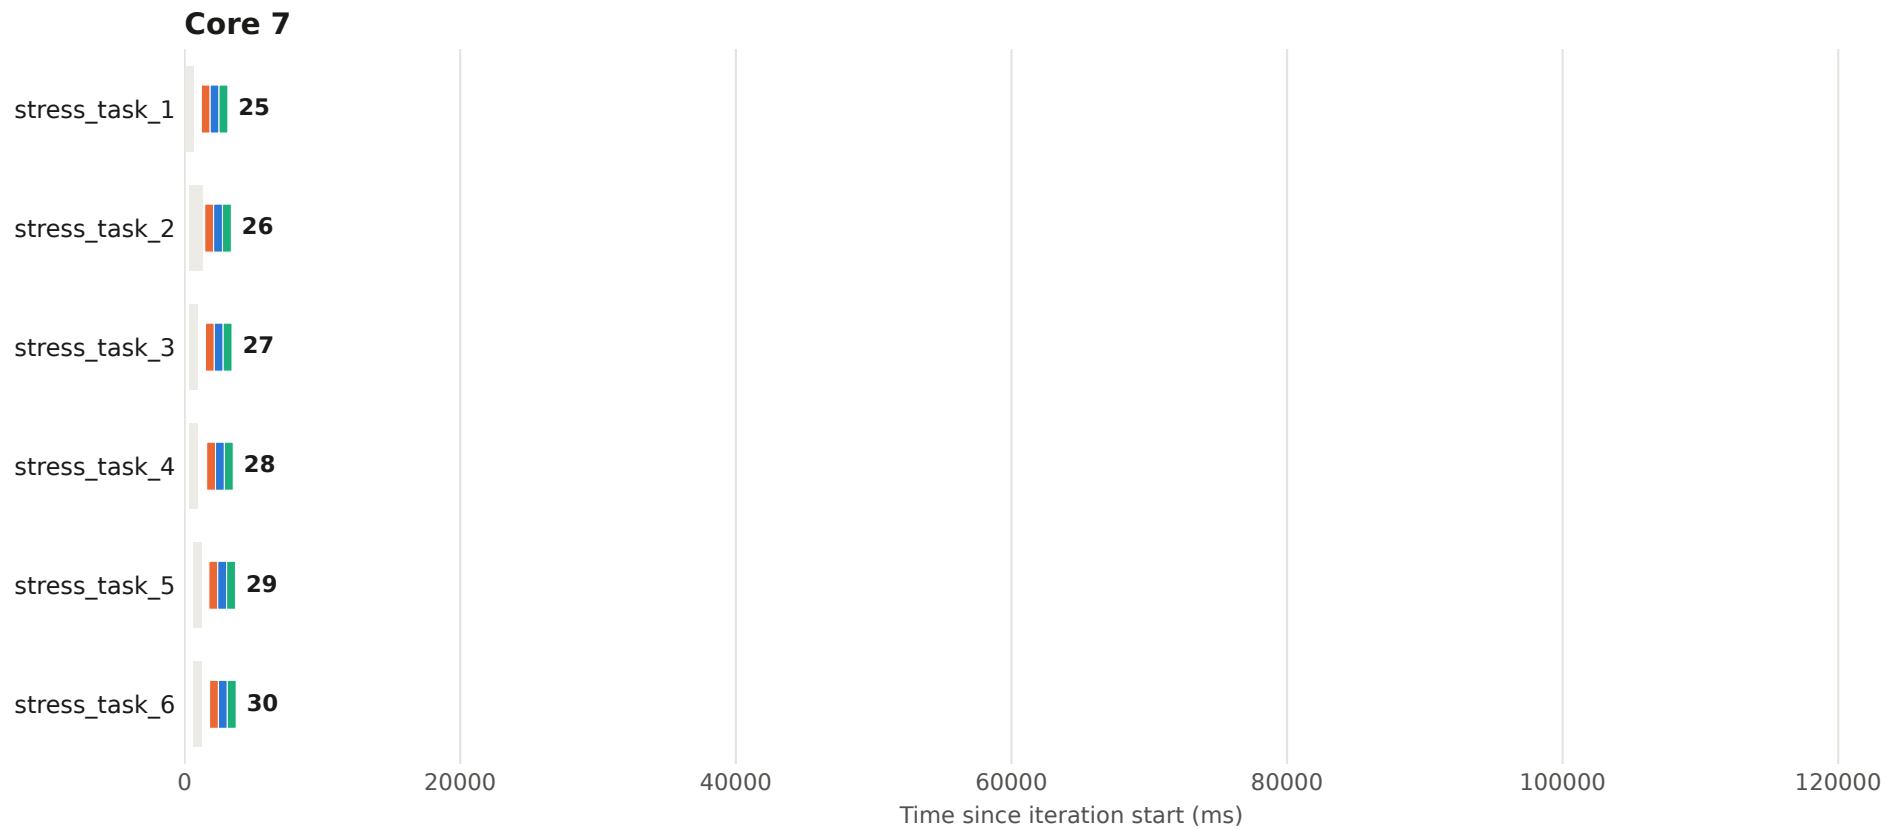


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 89 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

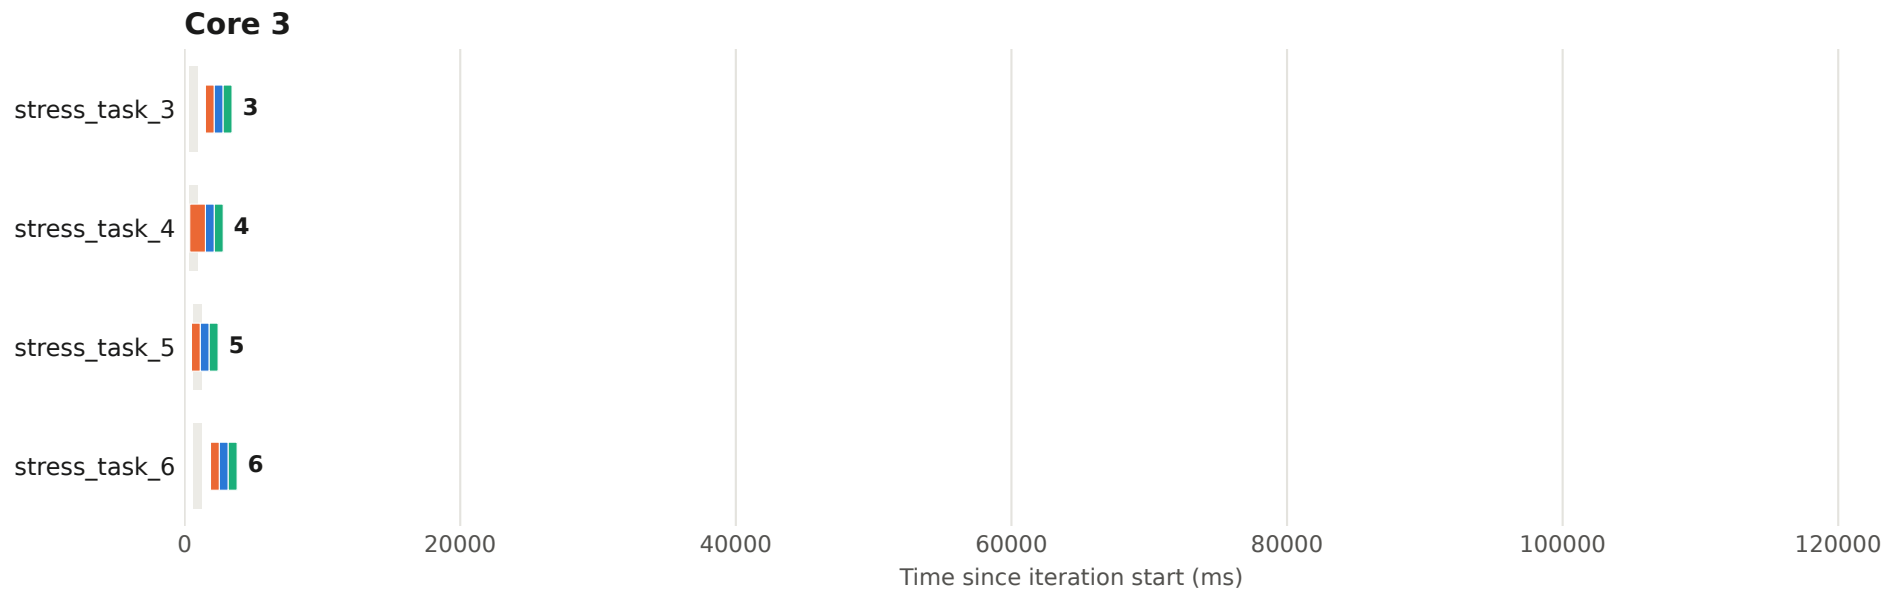

Execution plan - iteration 89 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

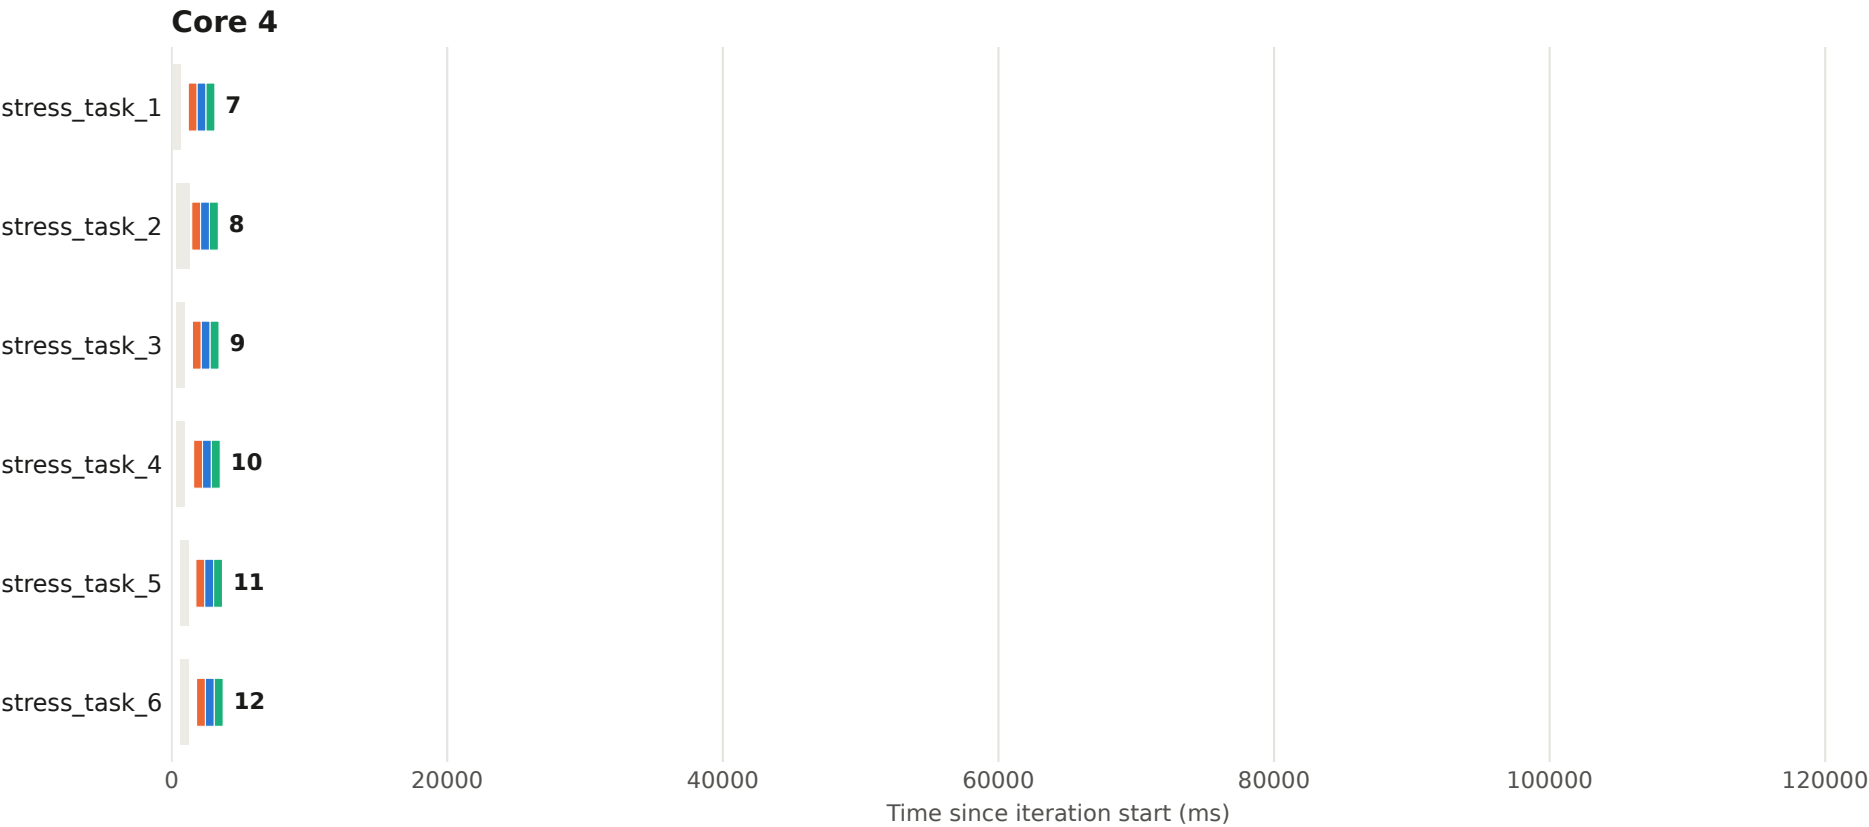


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 89 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

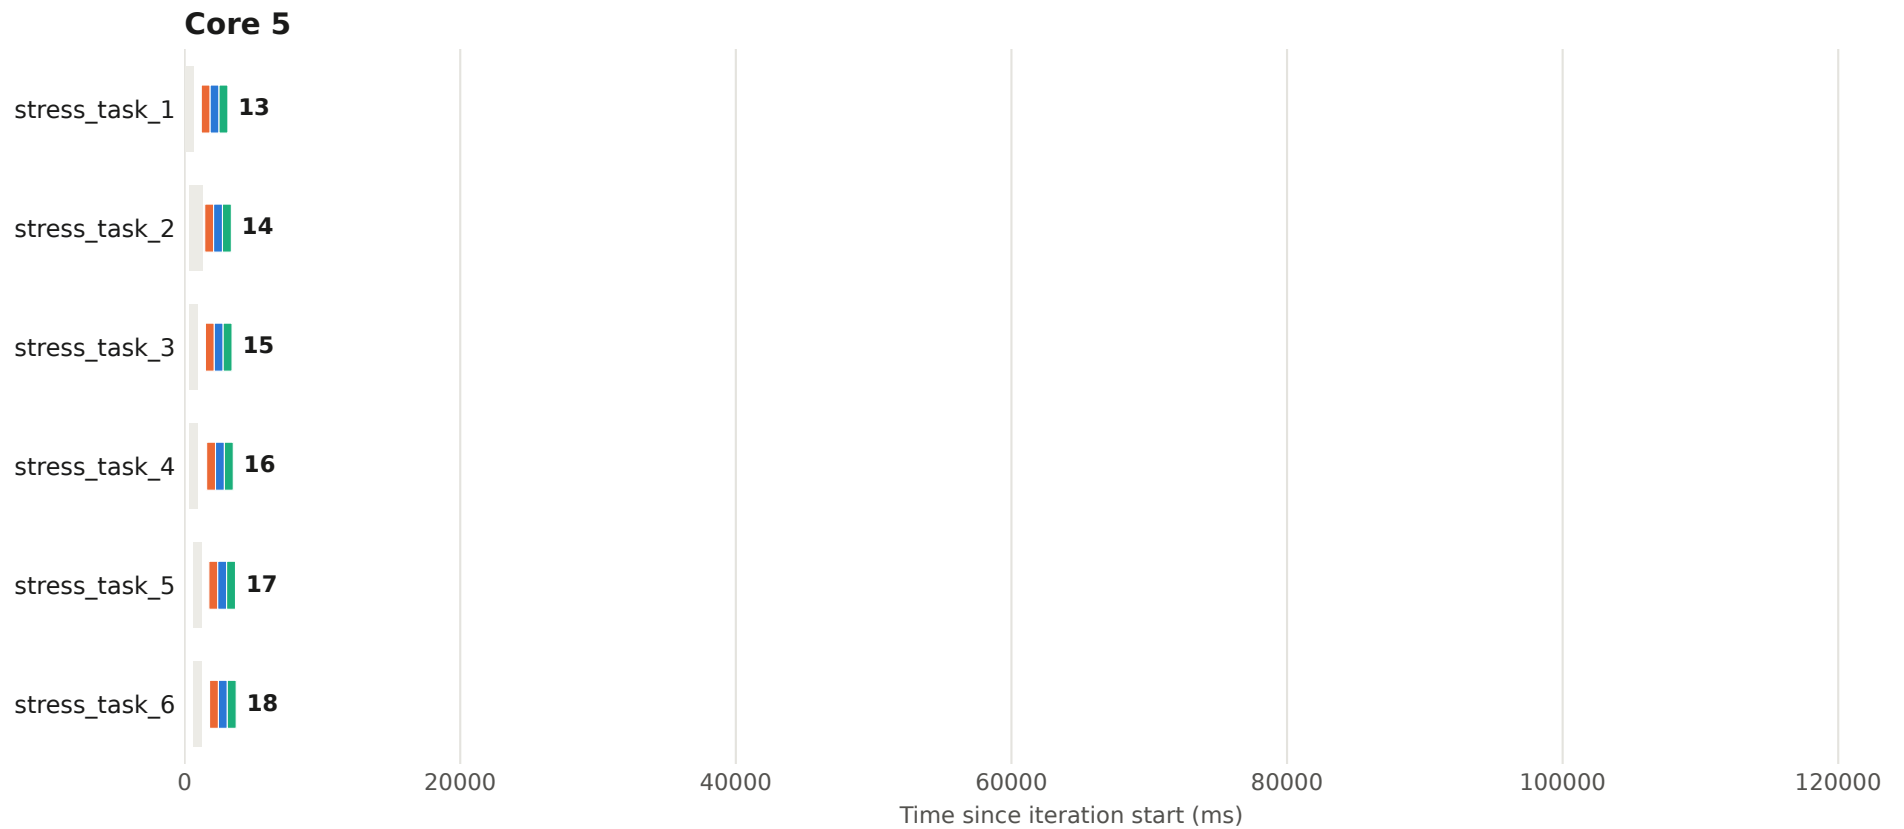


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 89 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

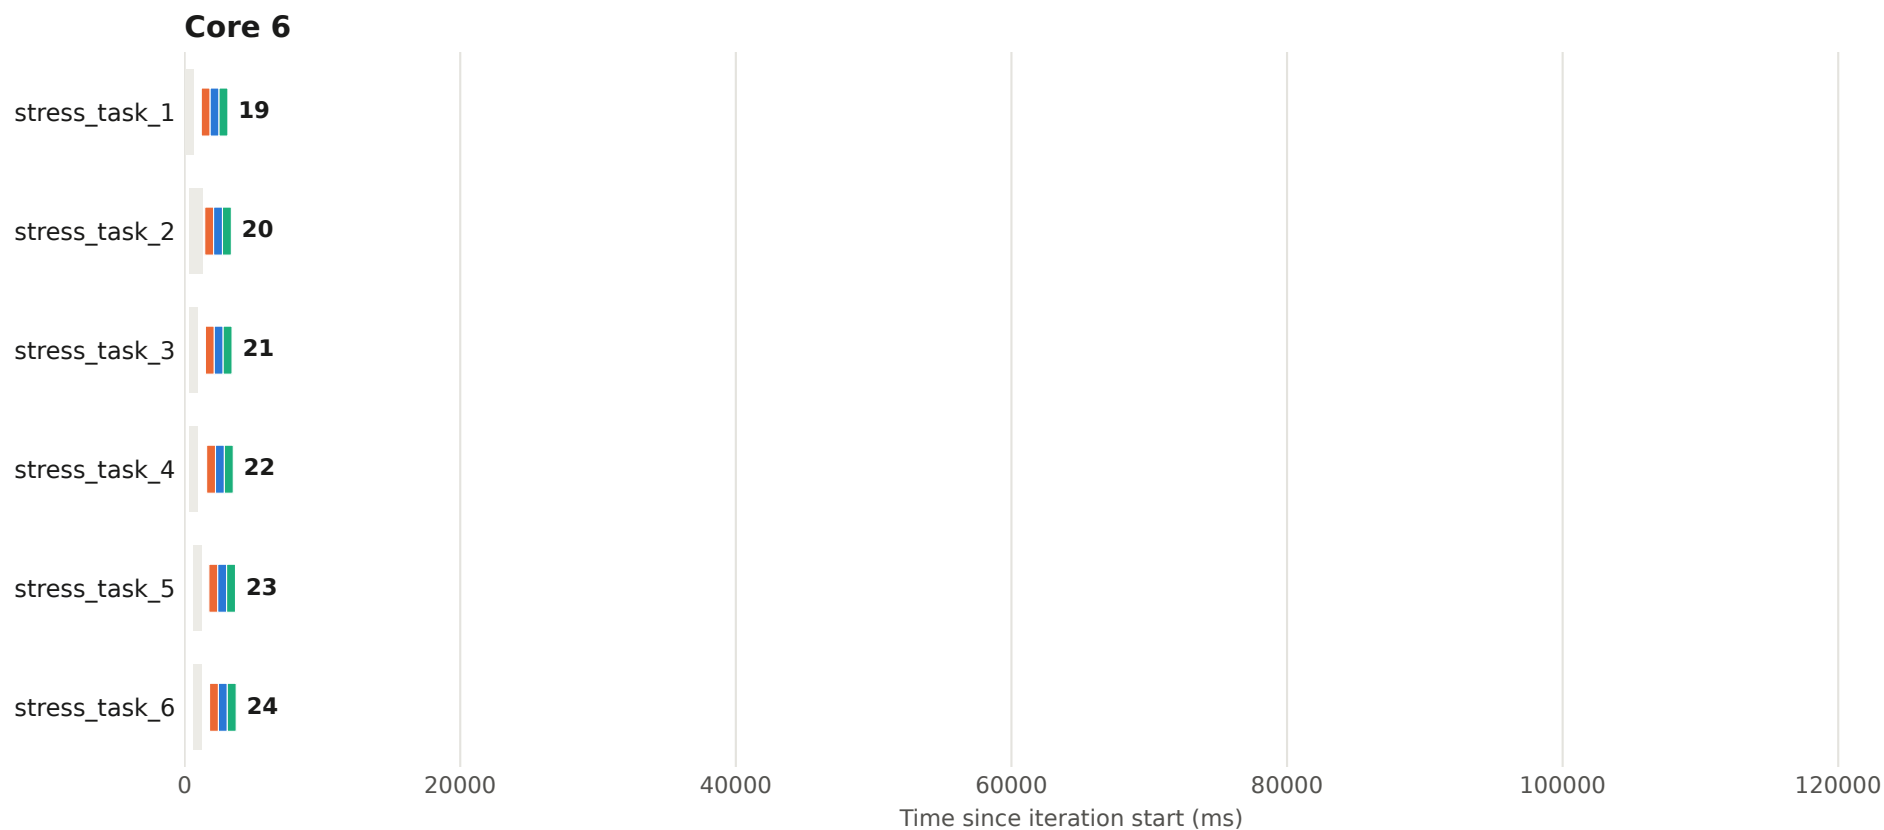


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 89 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

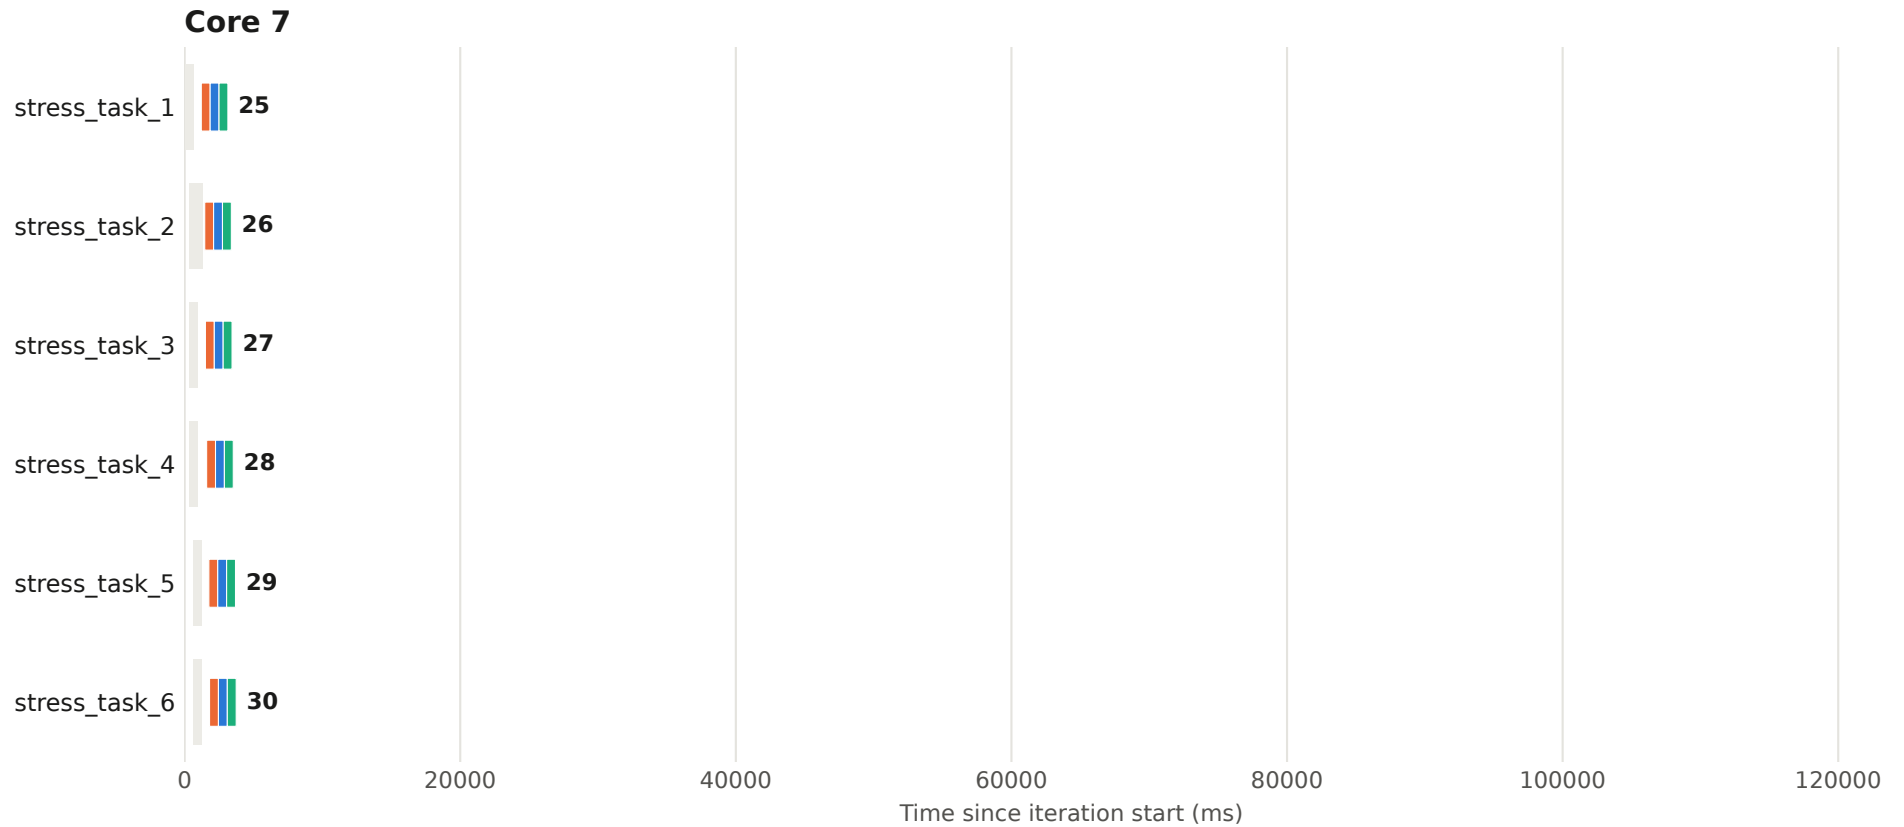


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 90 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

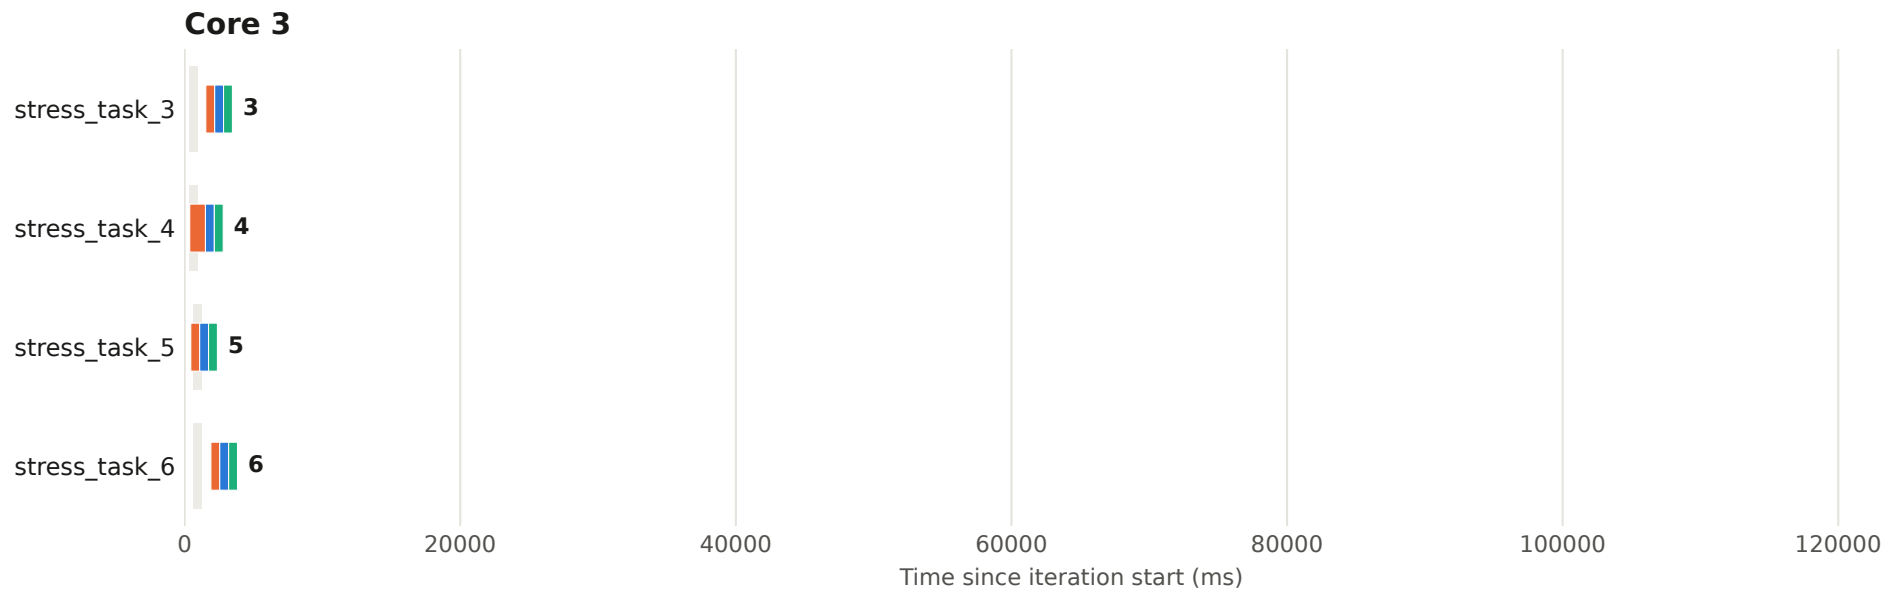

Execution plan - iteration 90 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

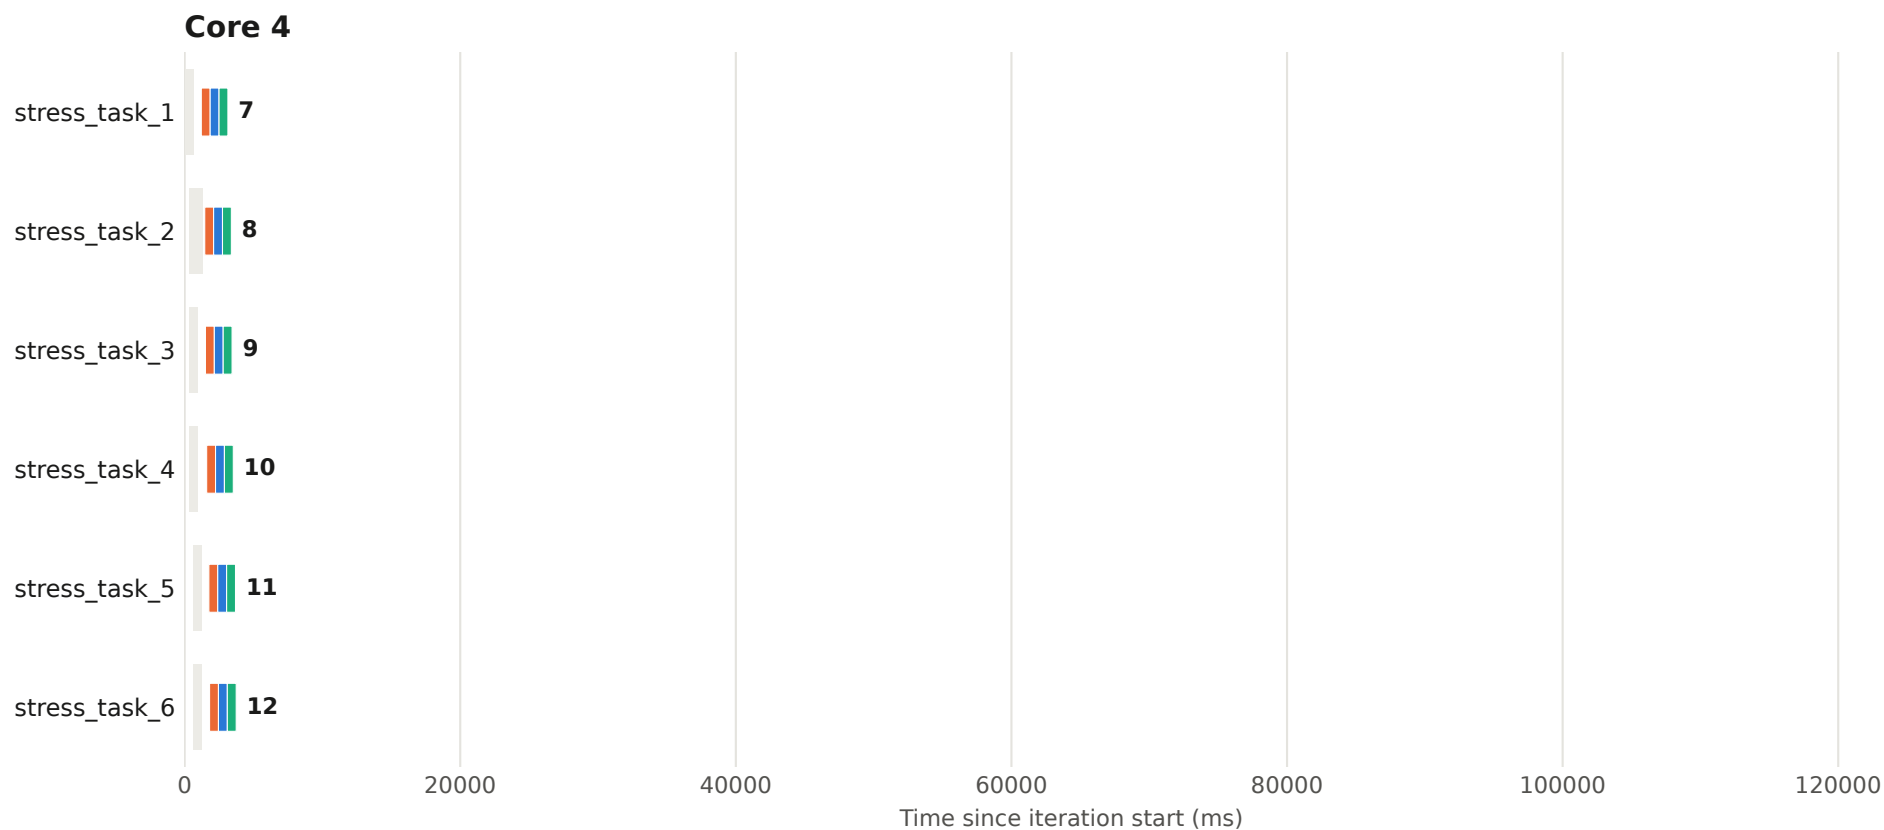


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 90 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

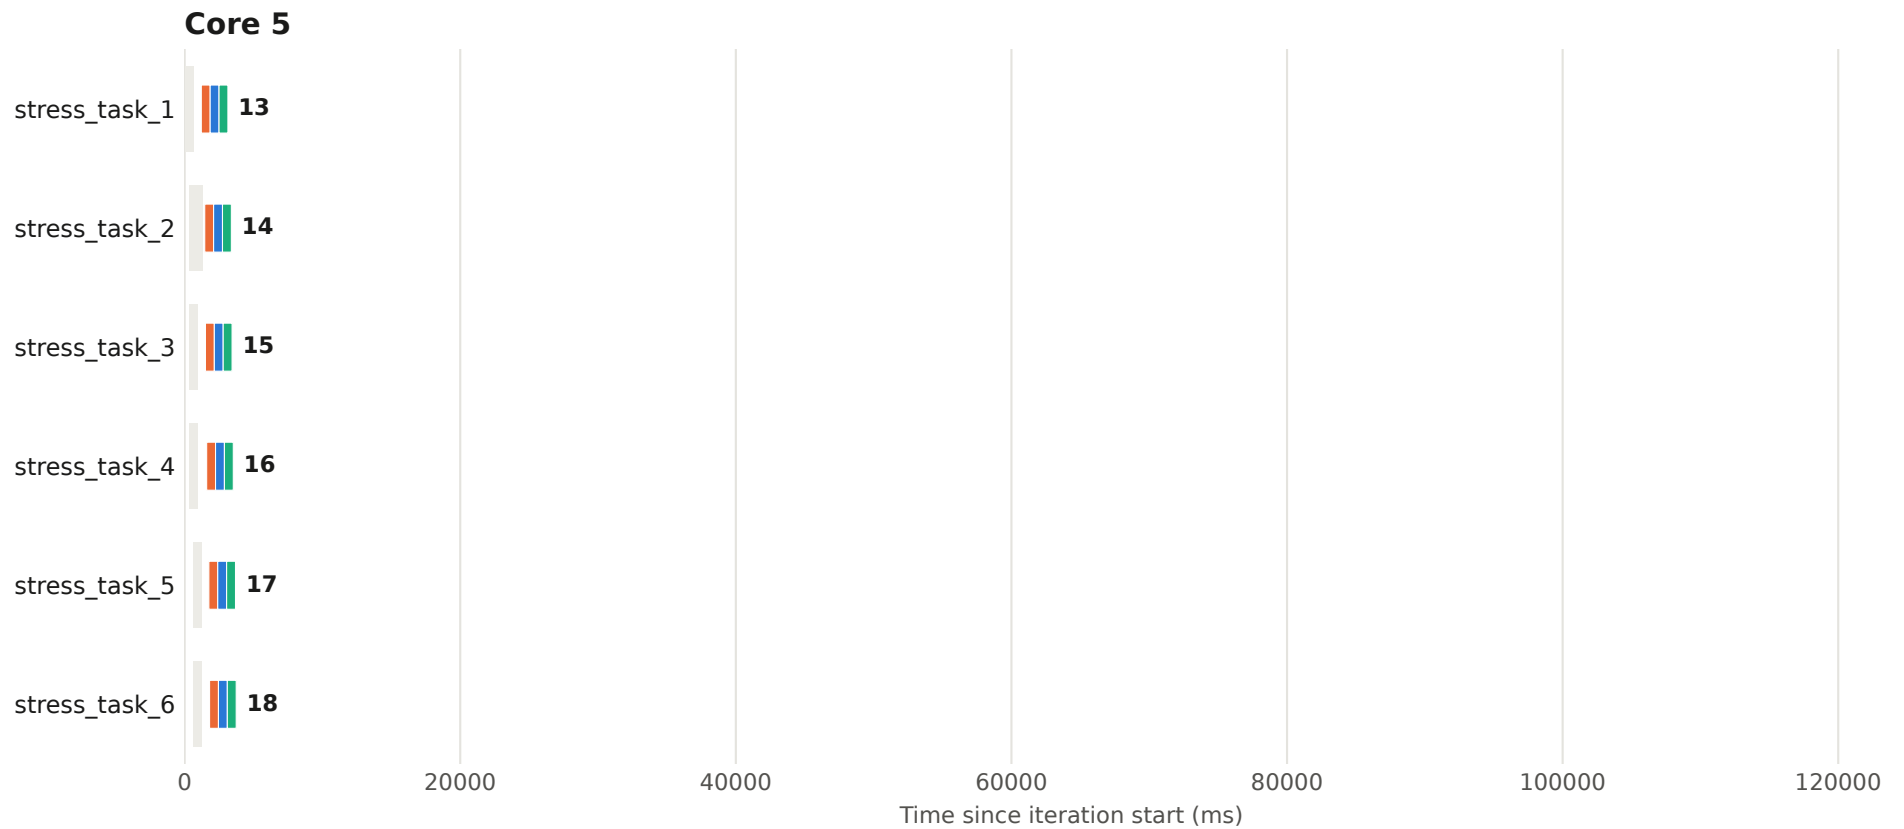


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 90 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

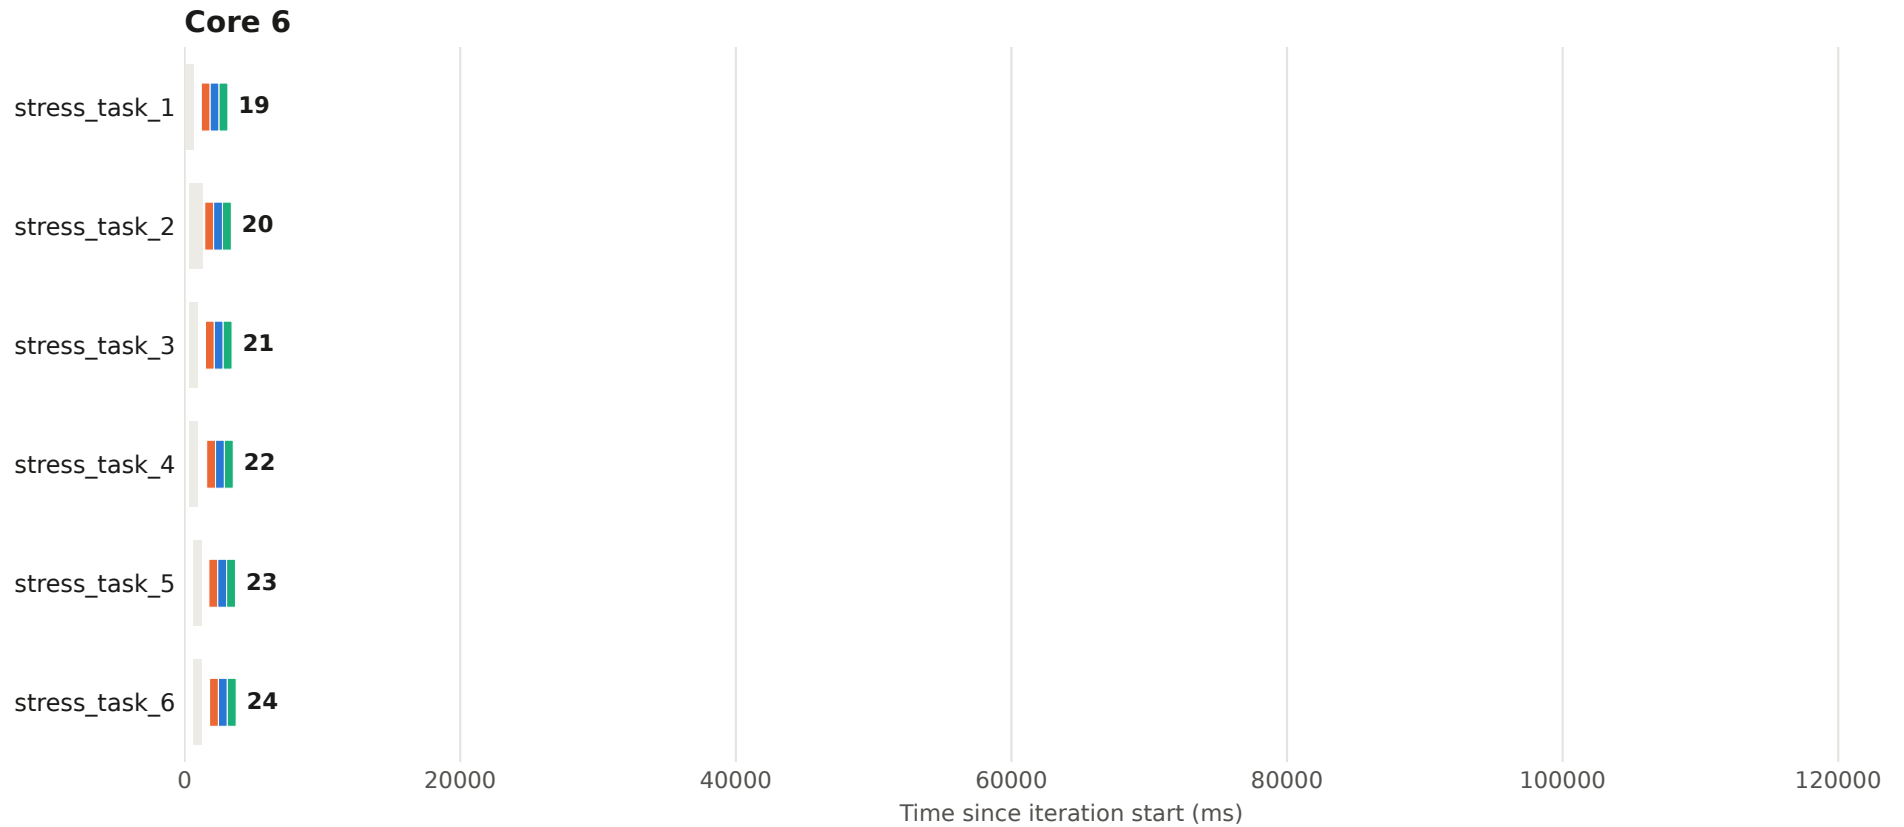


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 90 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

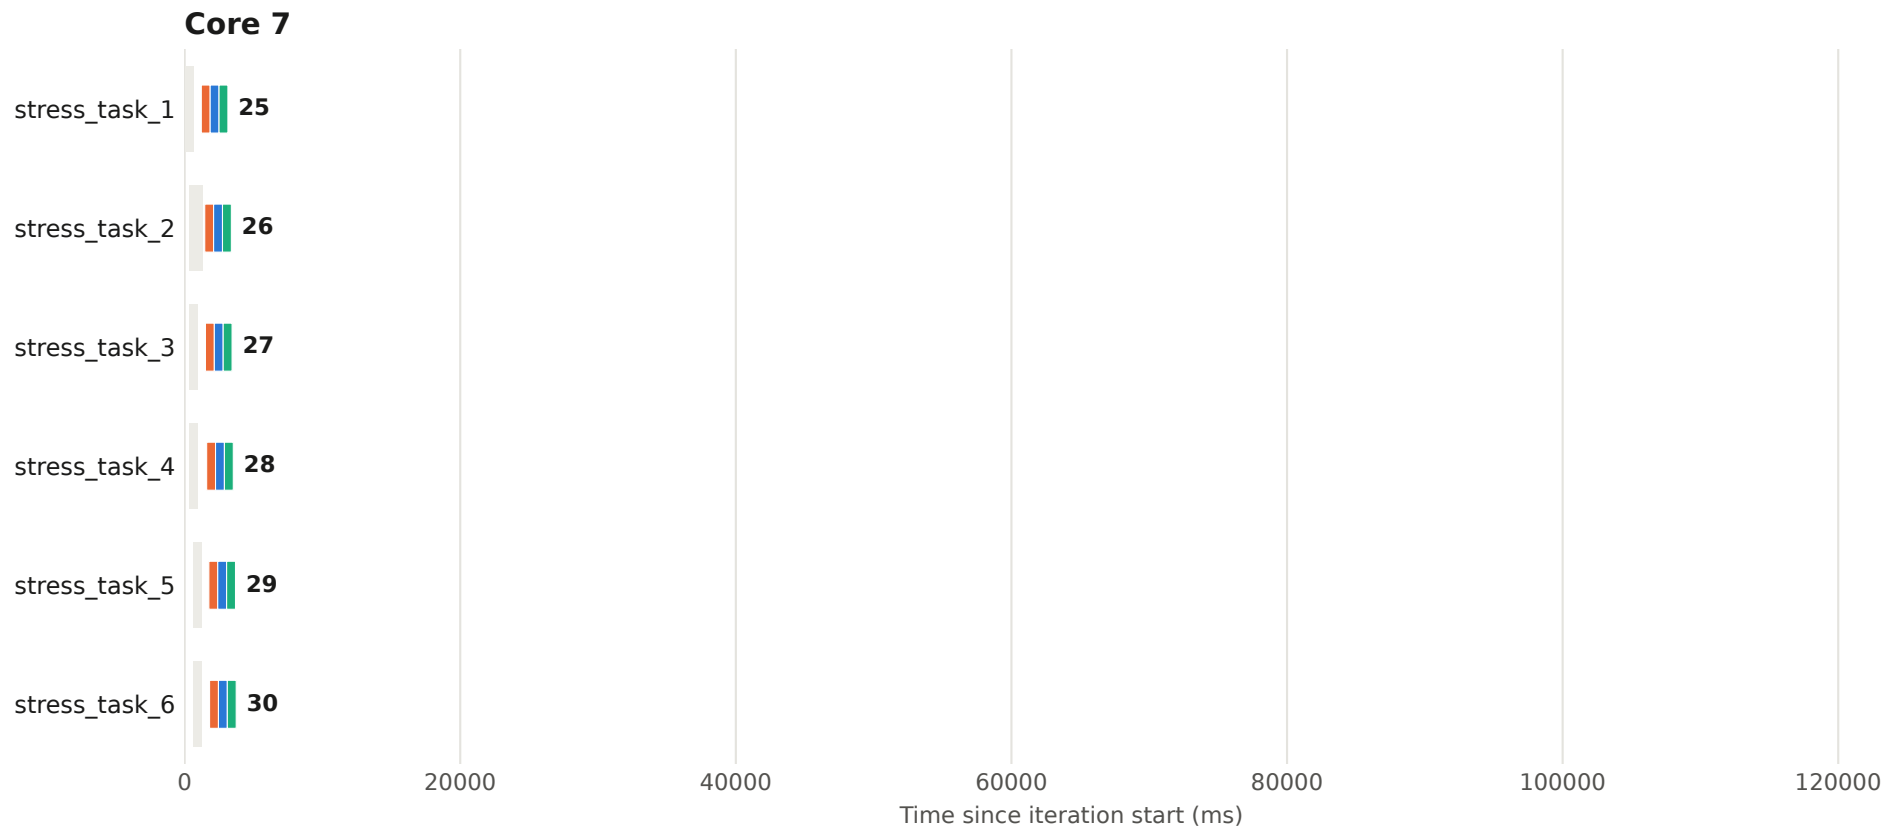


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 91 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

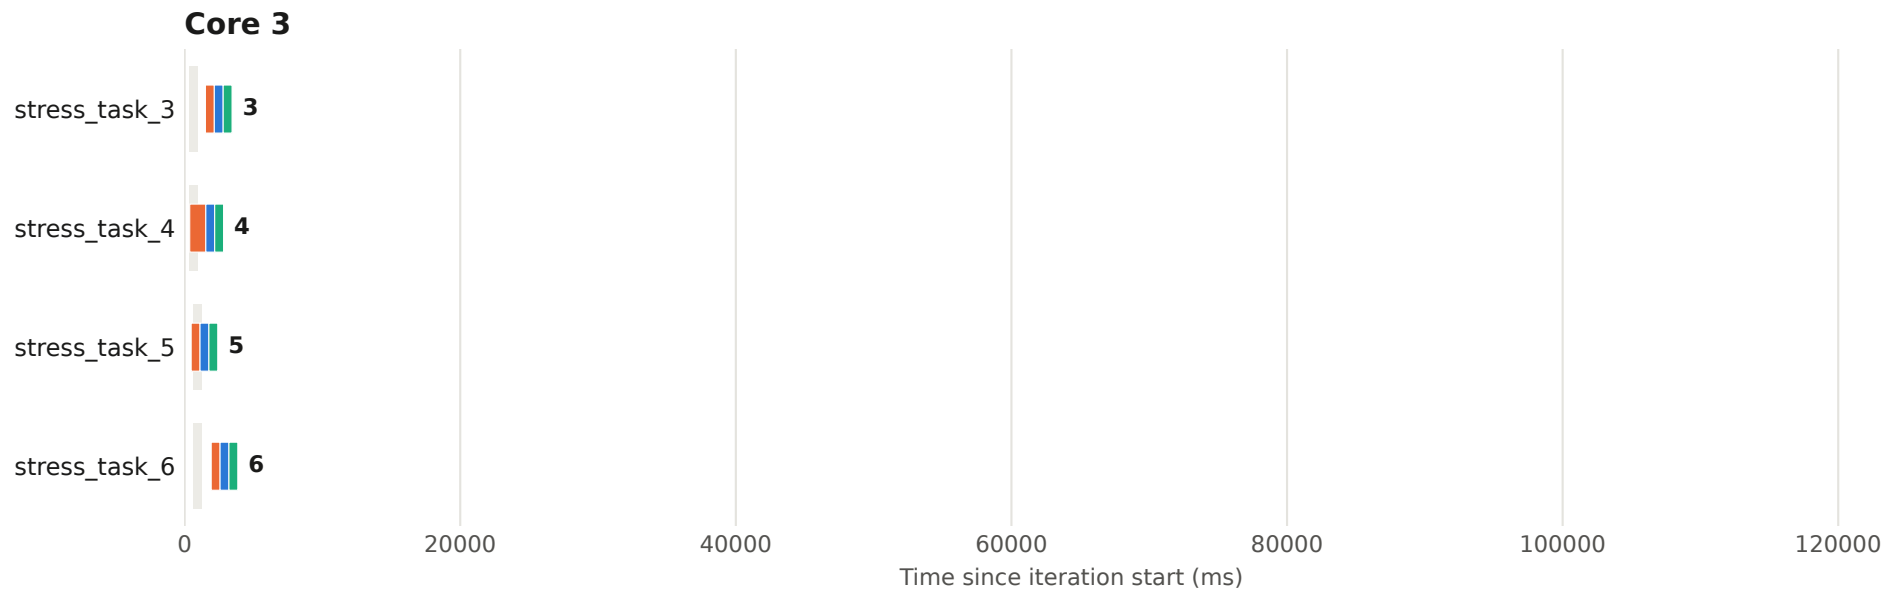

Execution plan - iteration 91 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

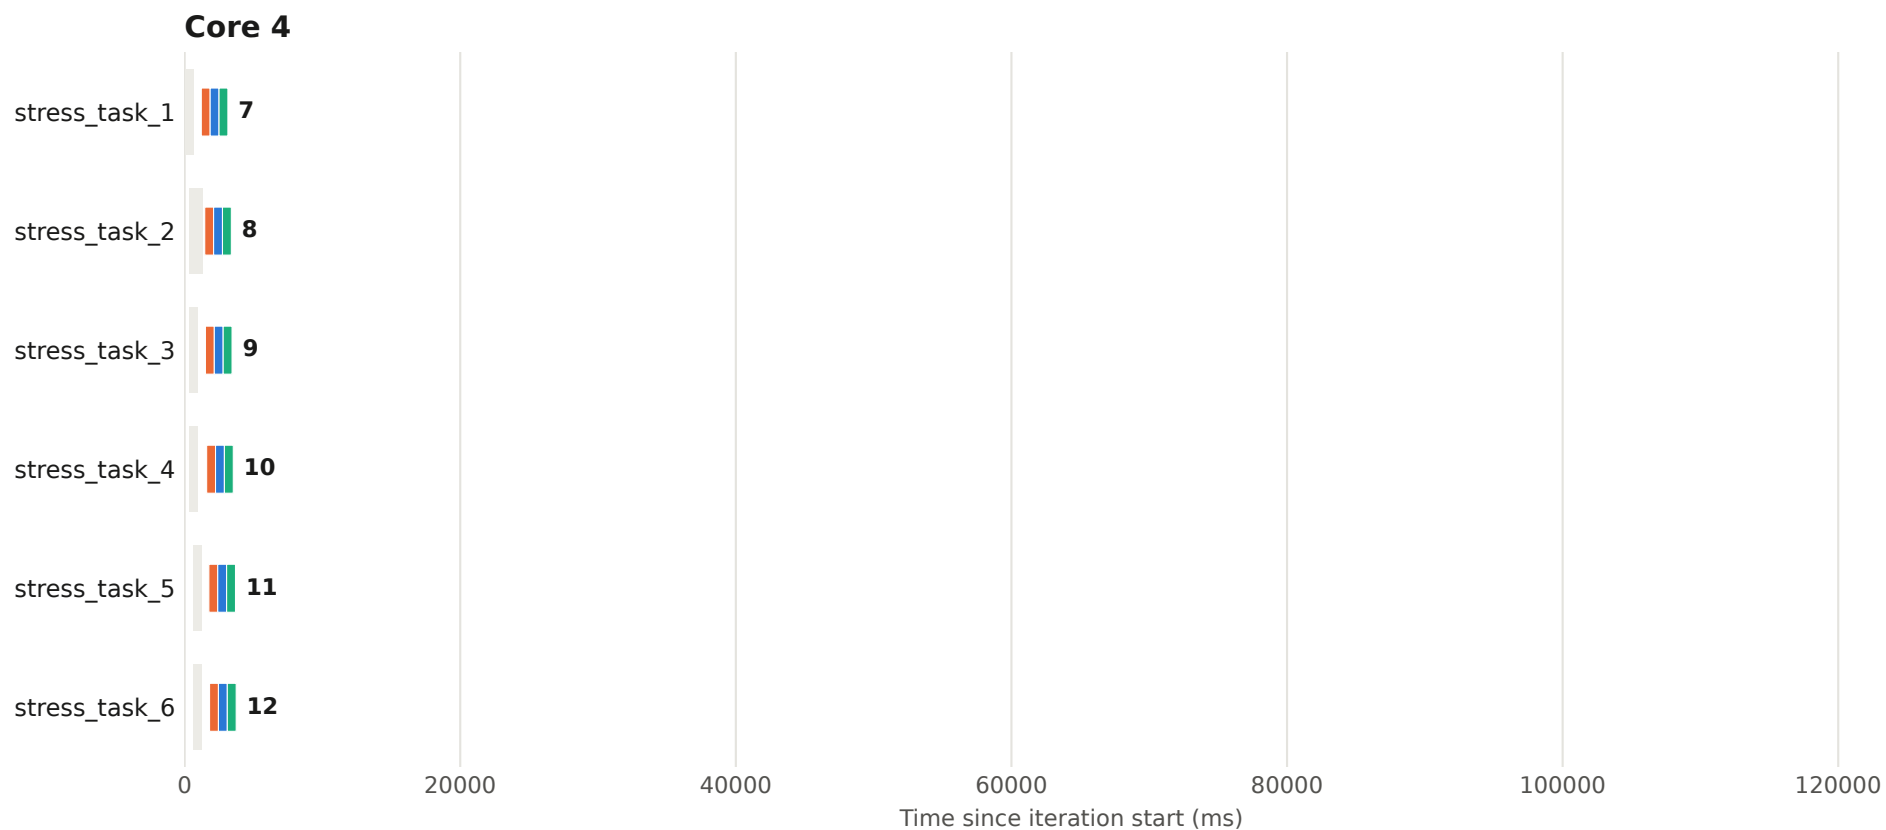


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 91 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

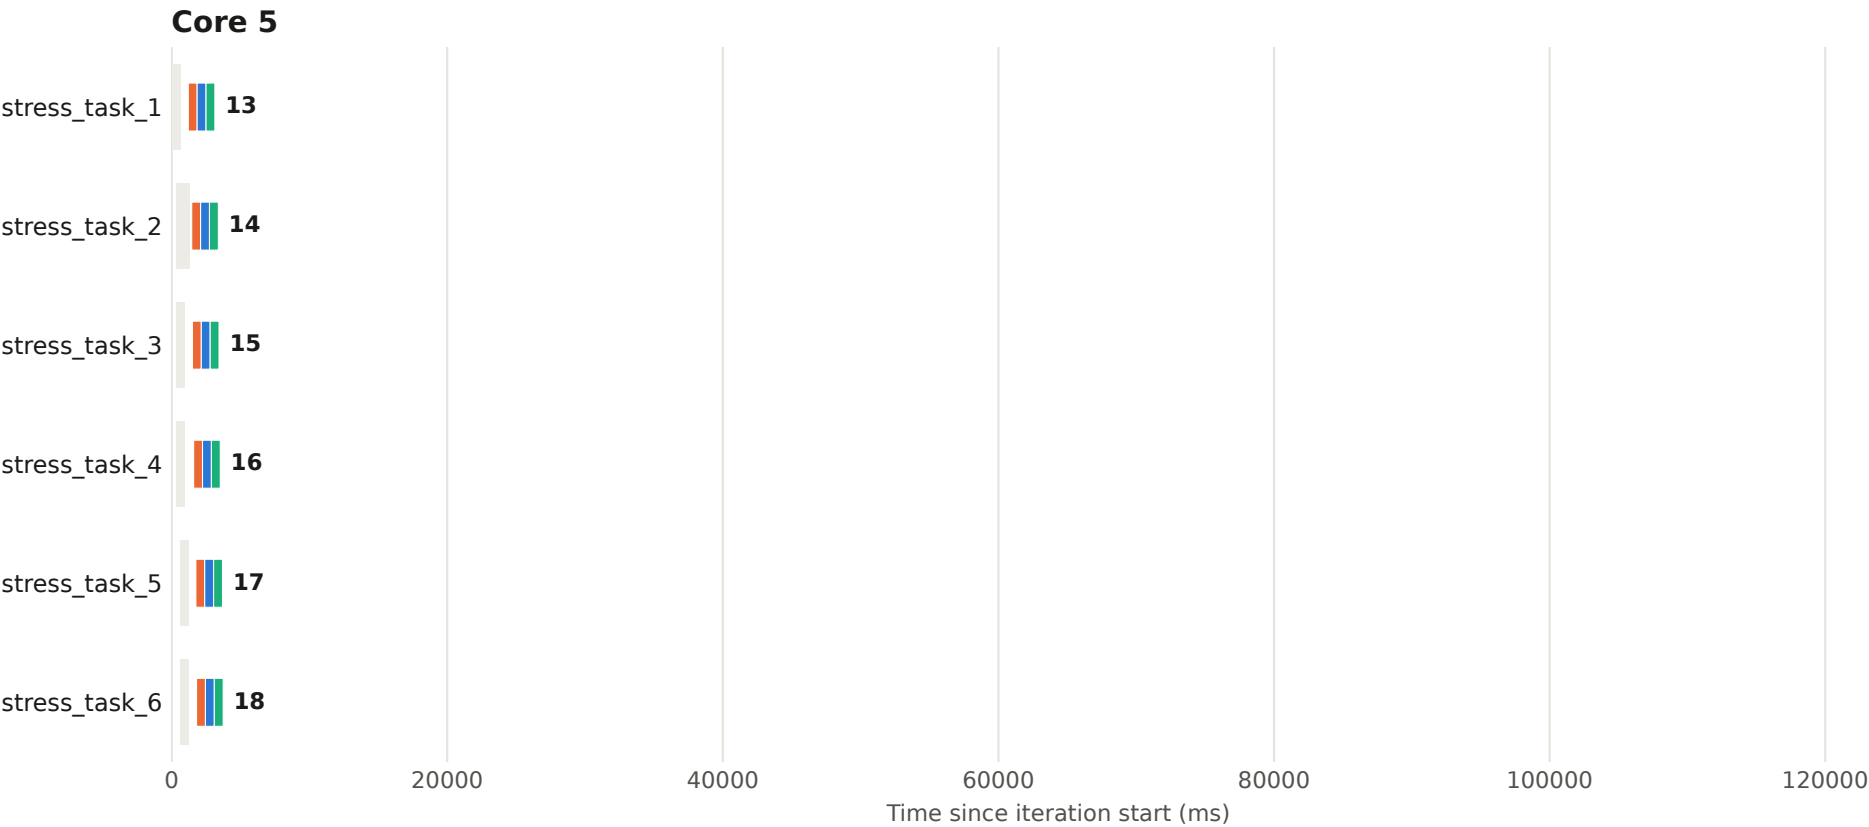


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 91 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

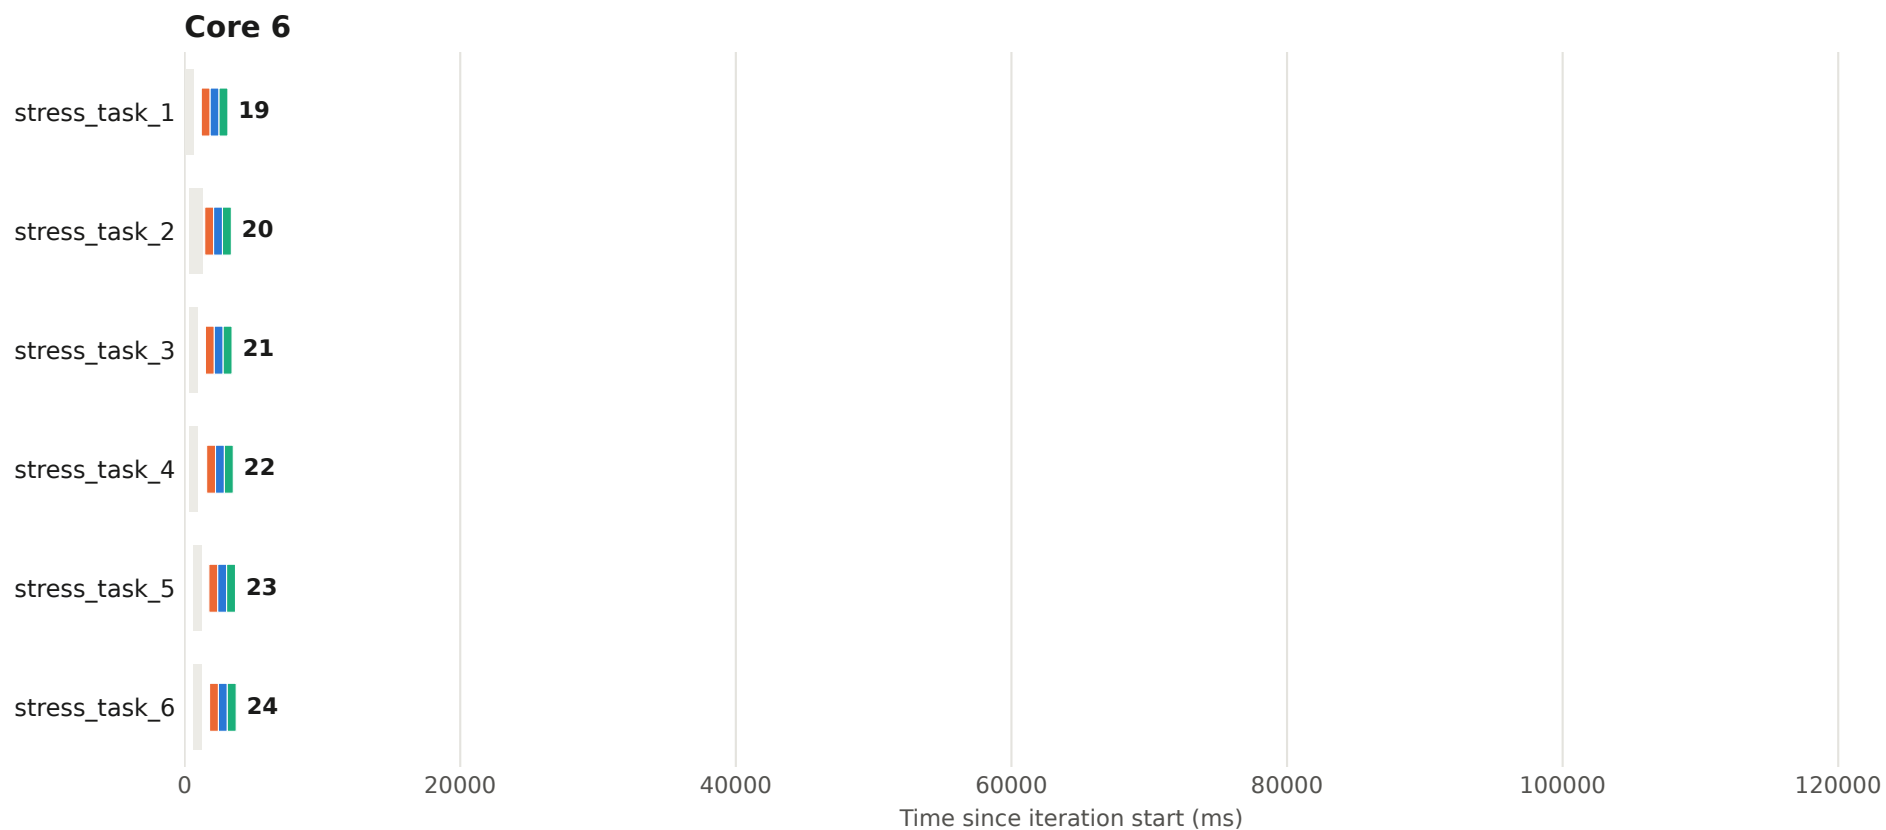


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 91 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

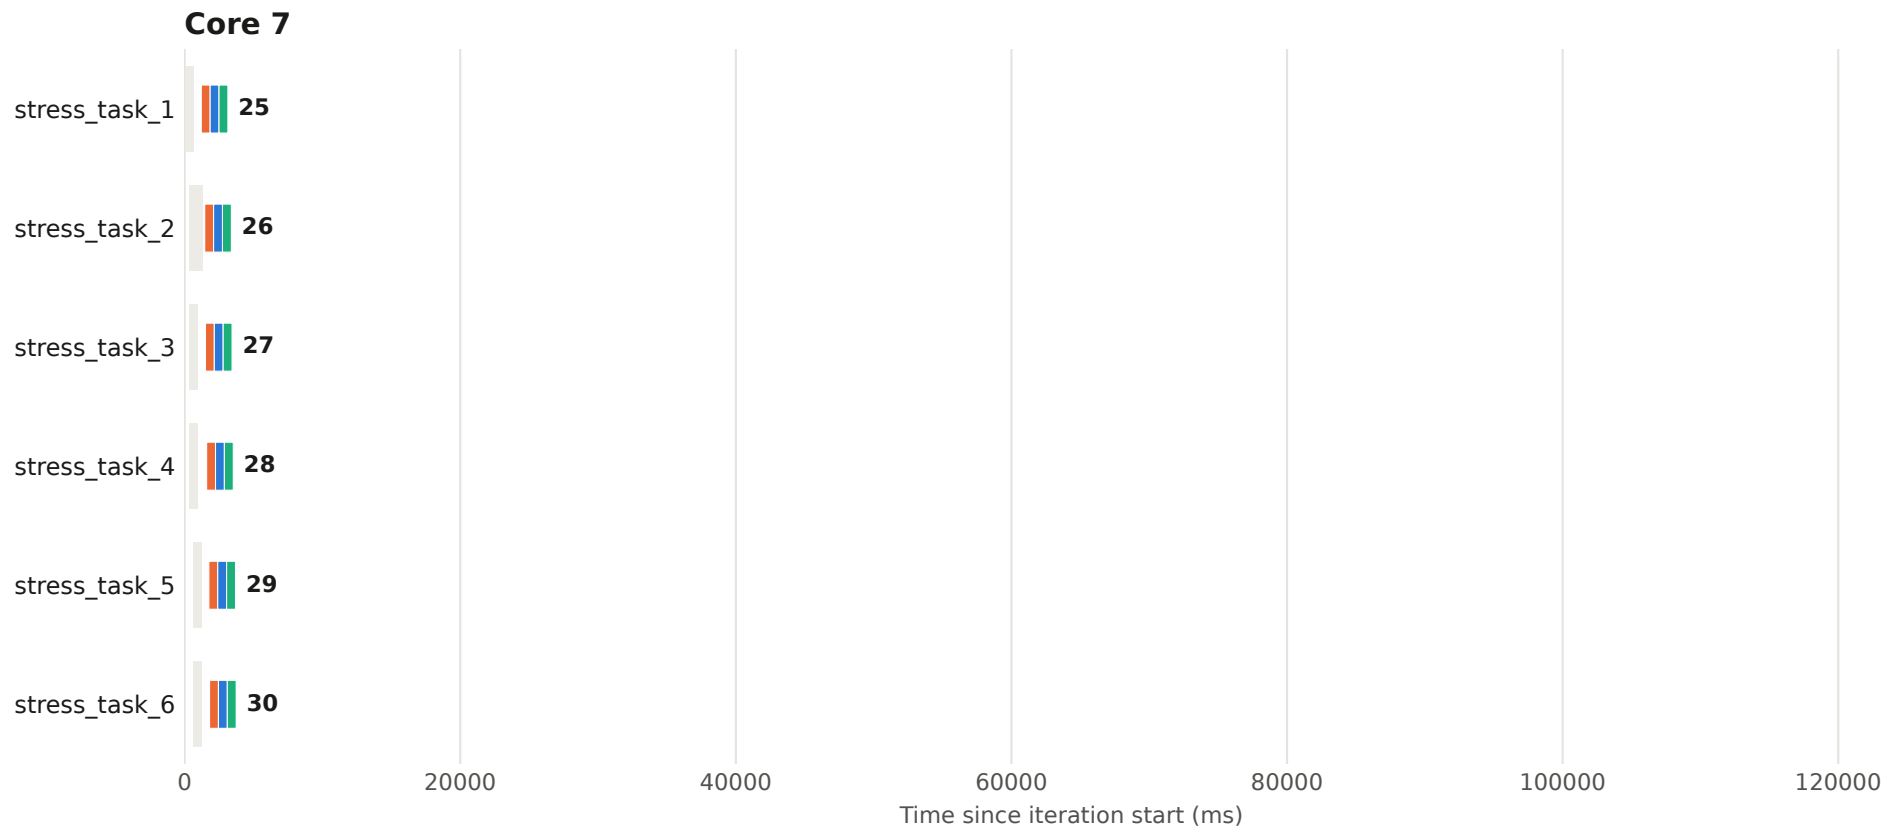


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 92 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

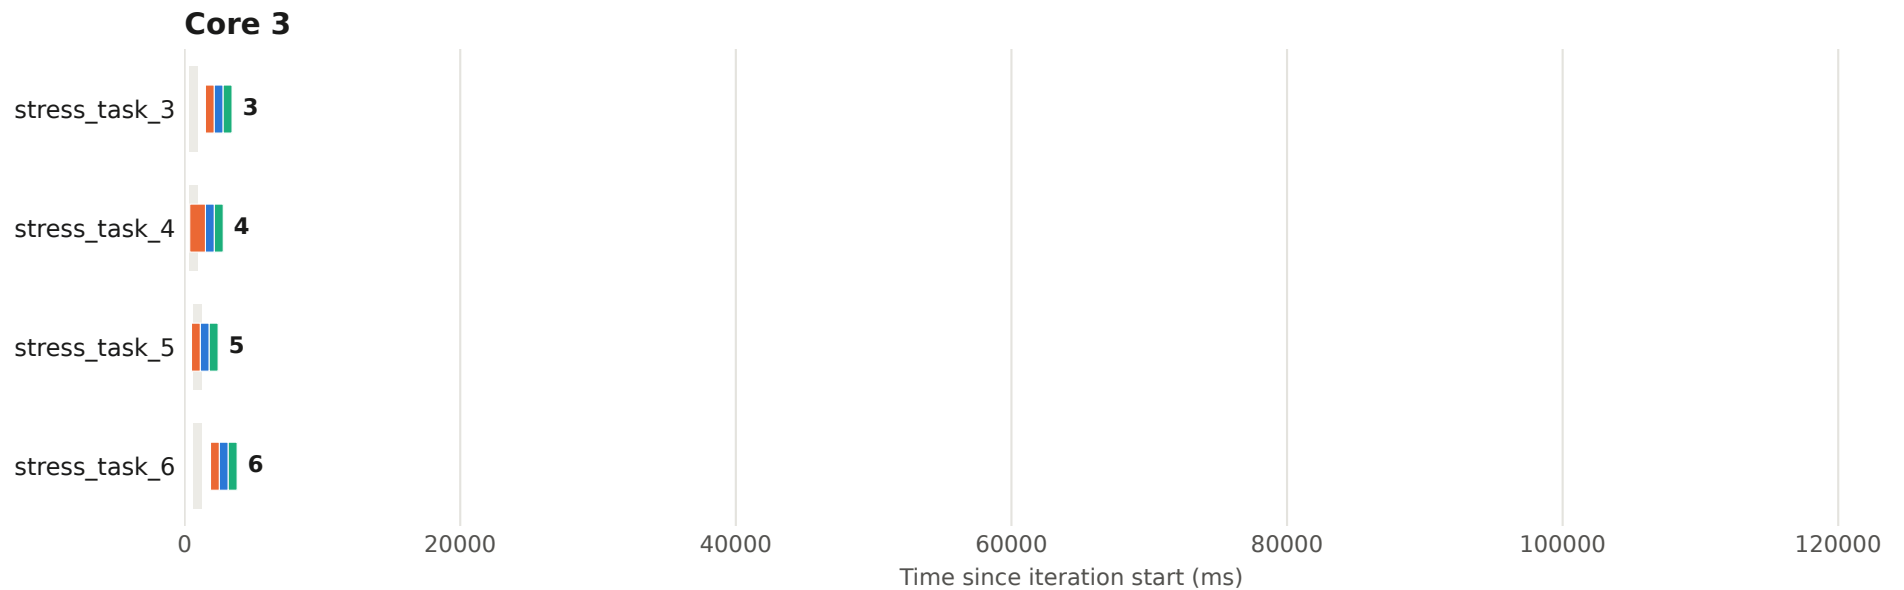

Execution plan - iteration 92 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

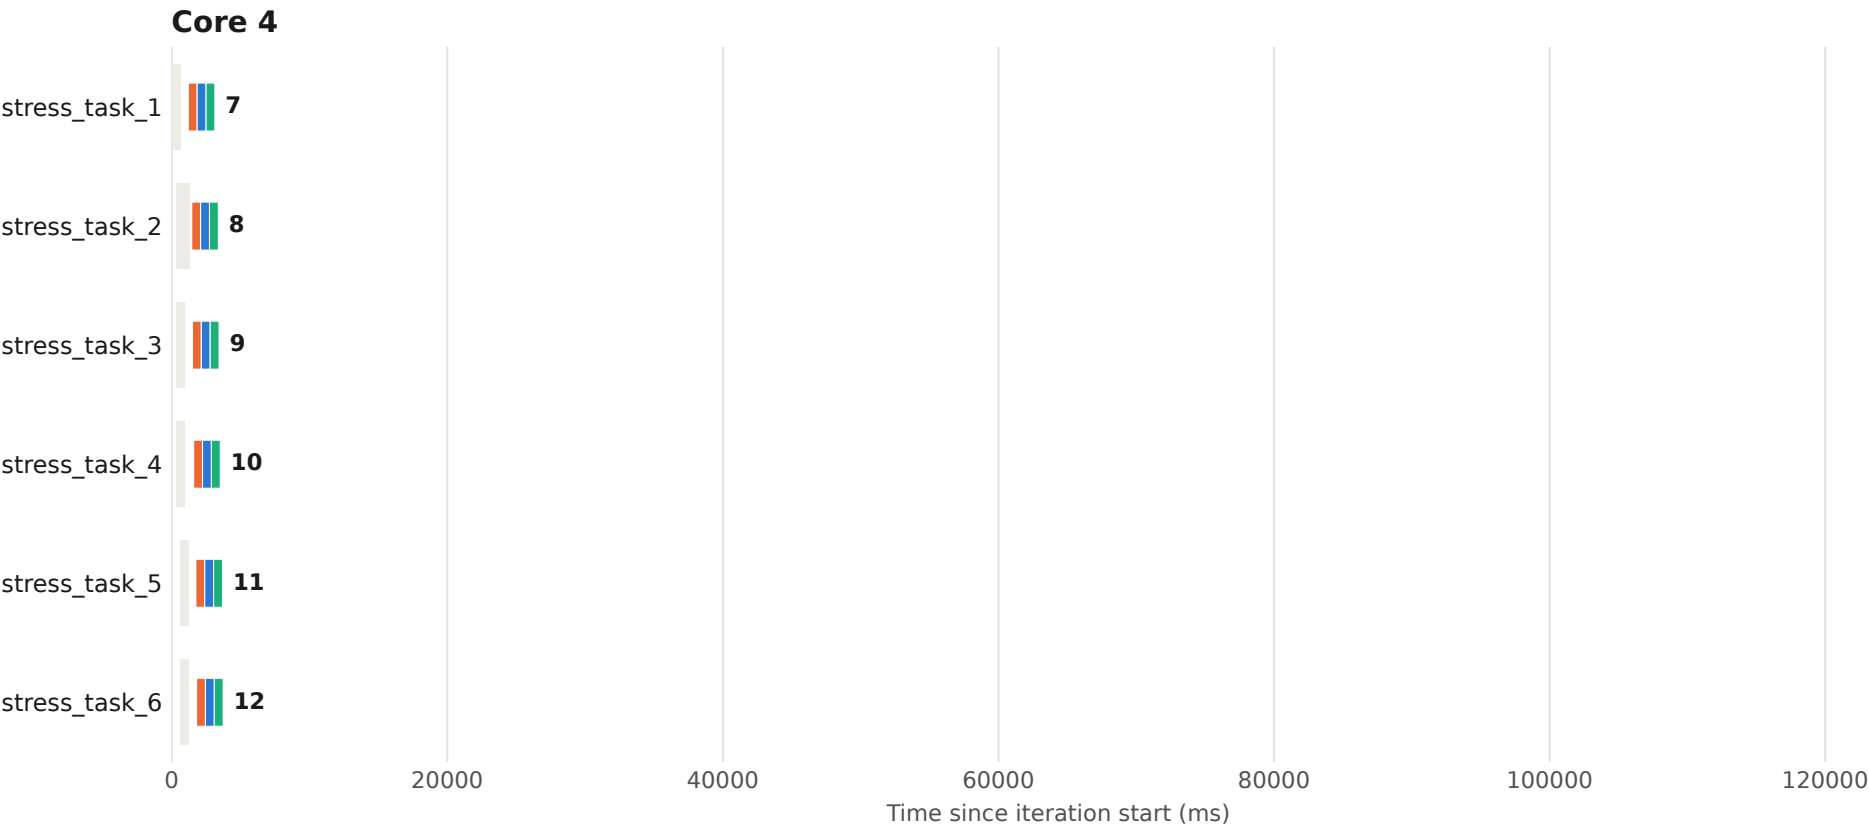


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 92 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

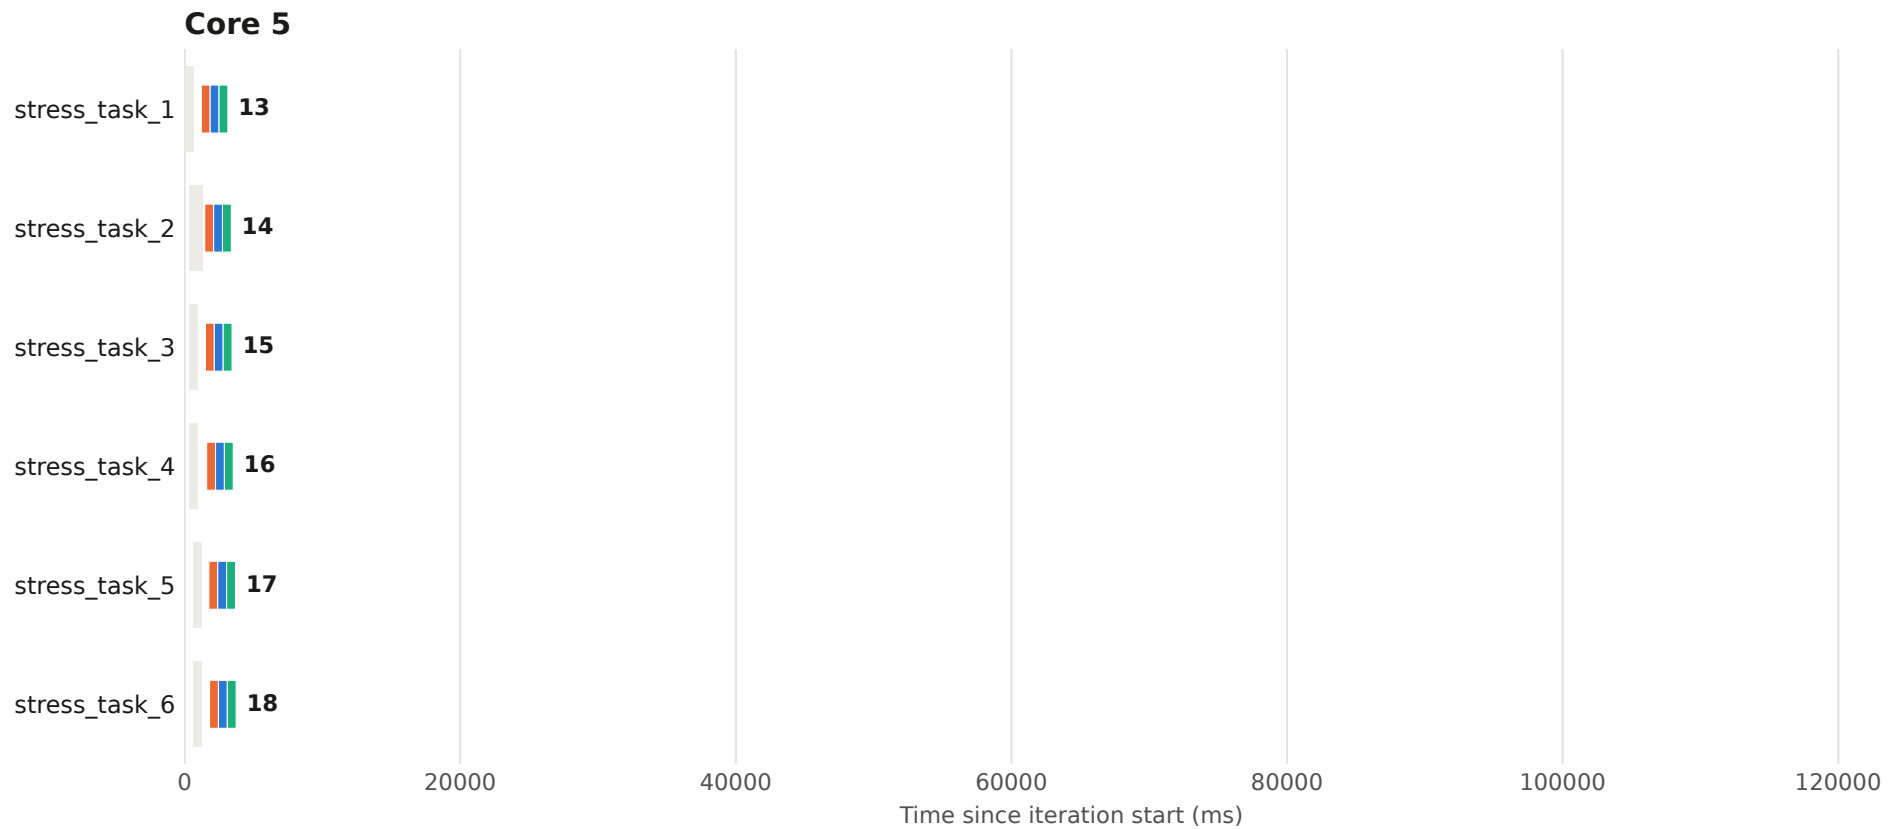


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 92 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

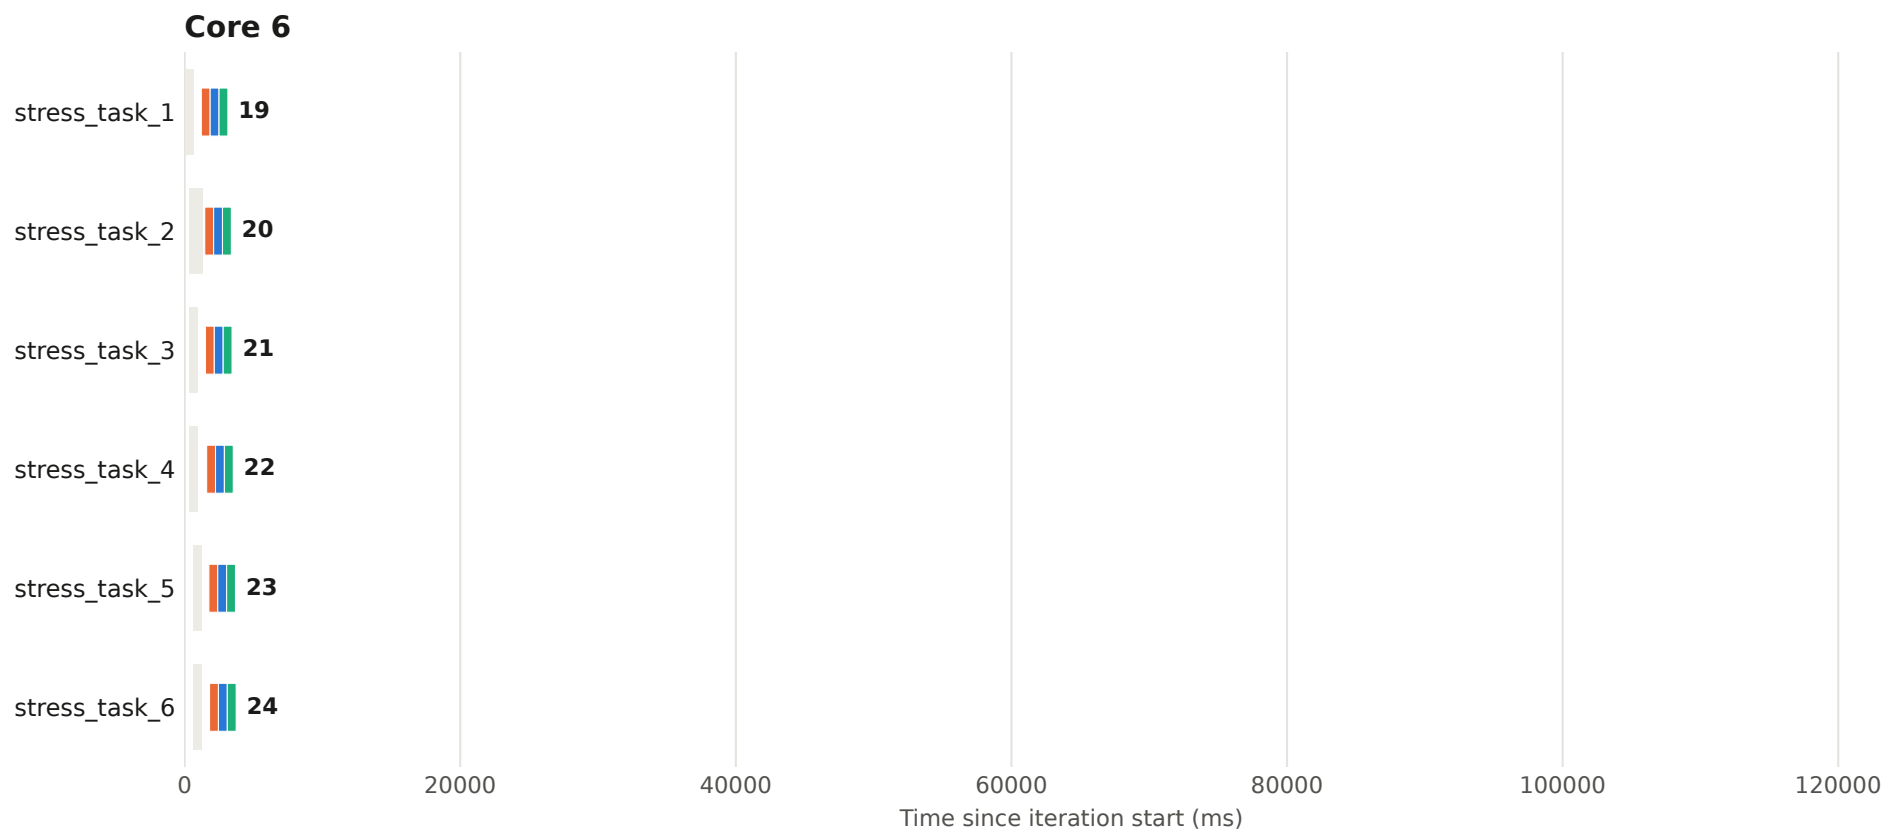


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 92 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

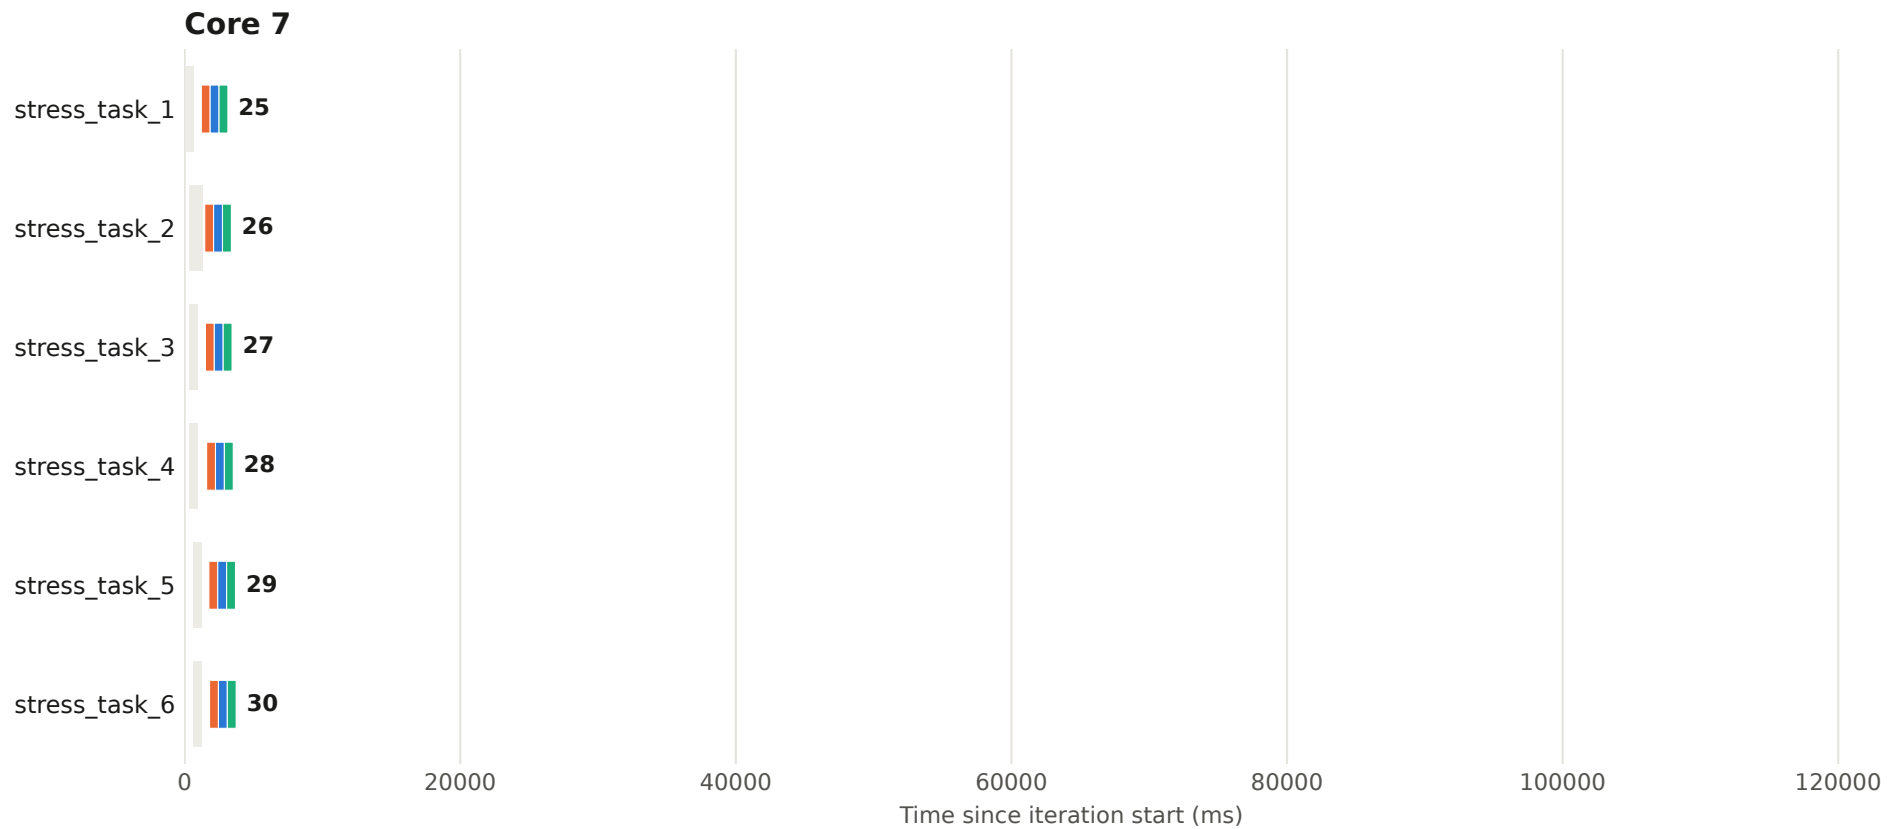


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 93 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

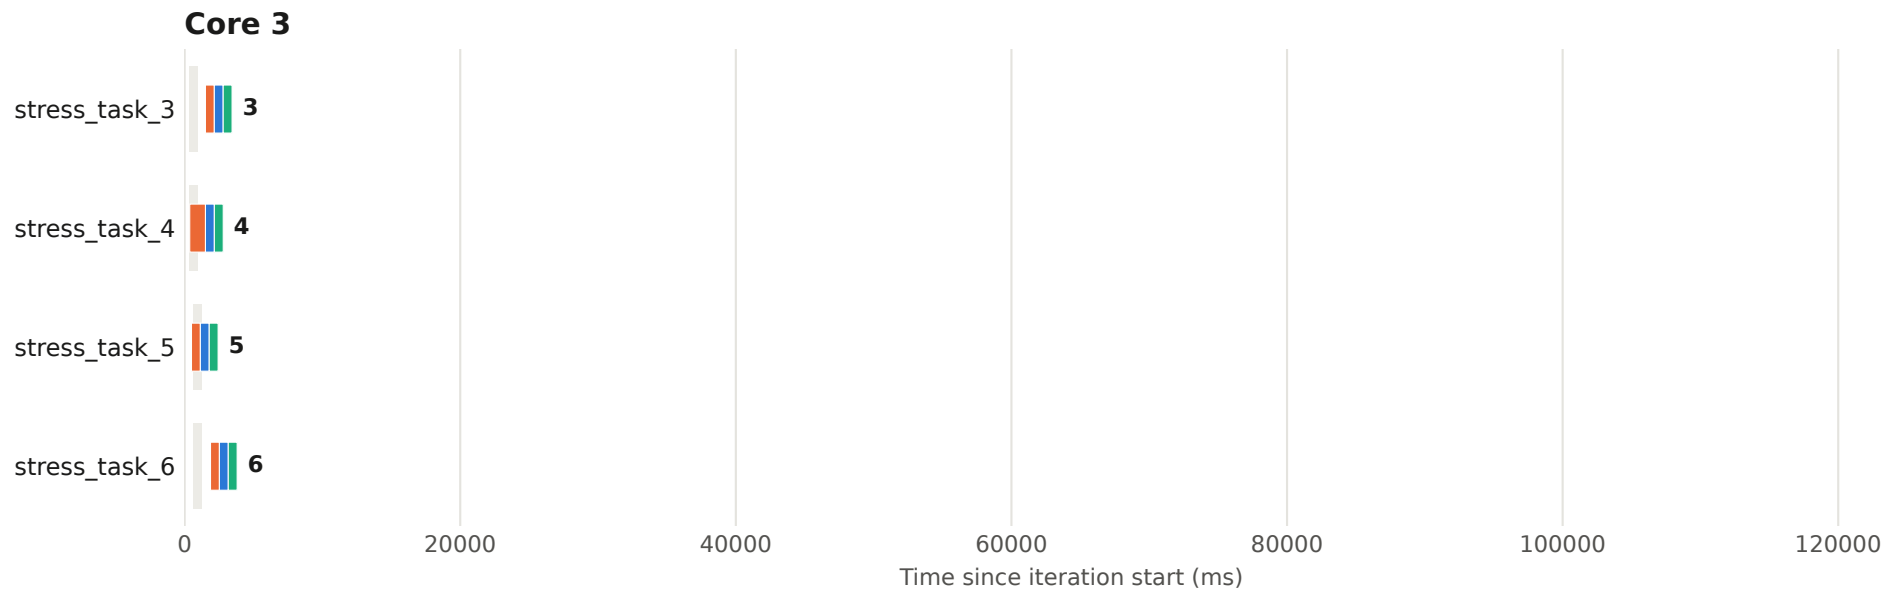

Execution plan - iteration 93 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

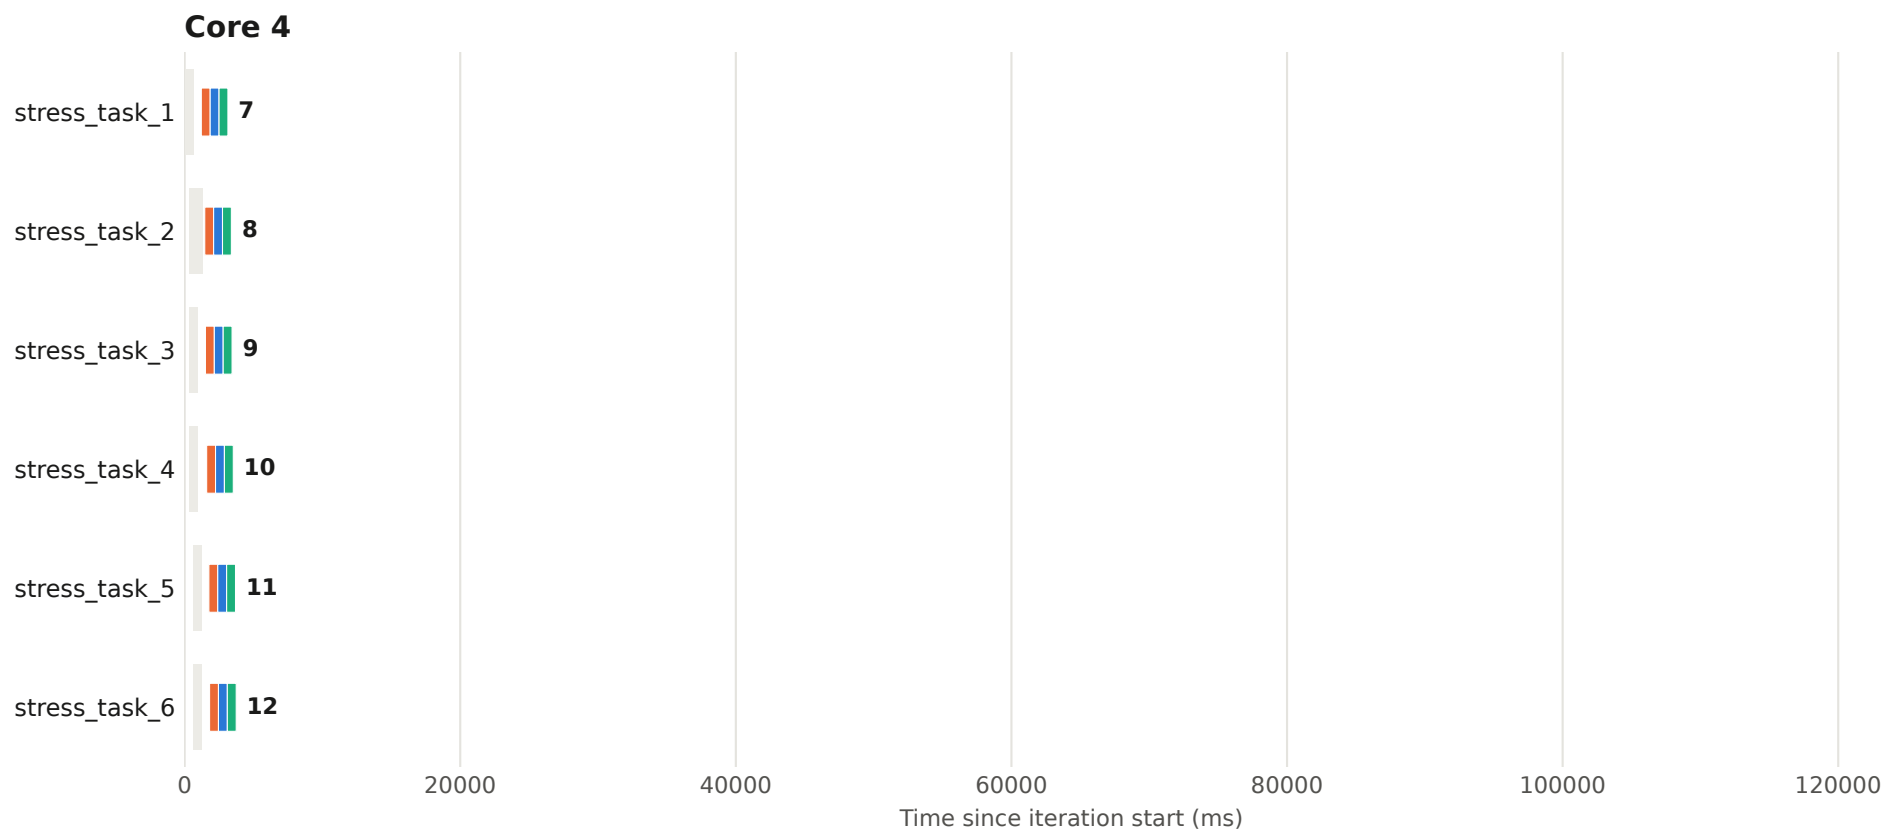


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 93 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

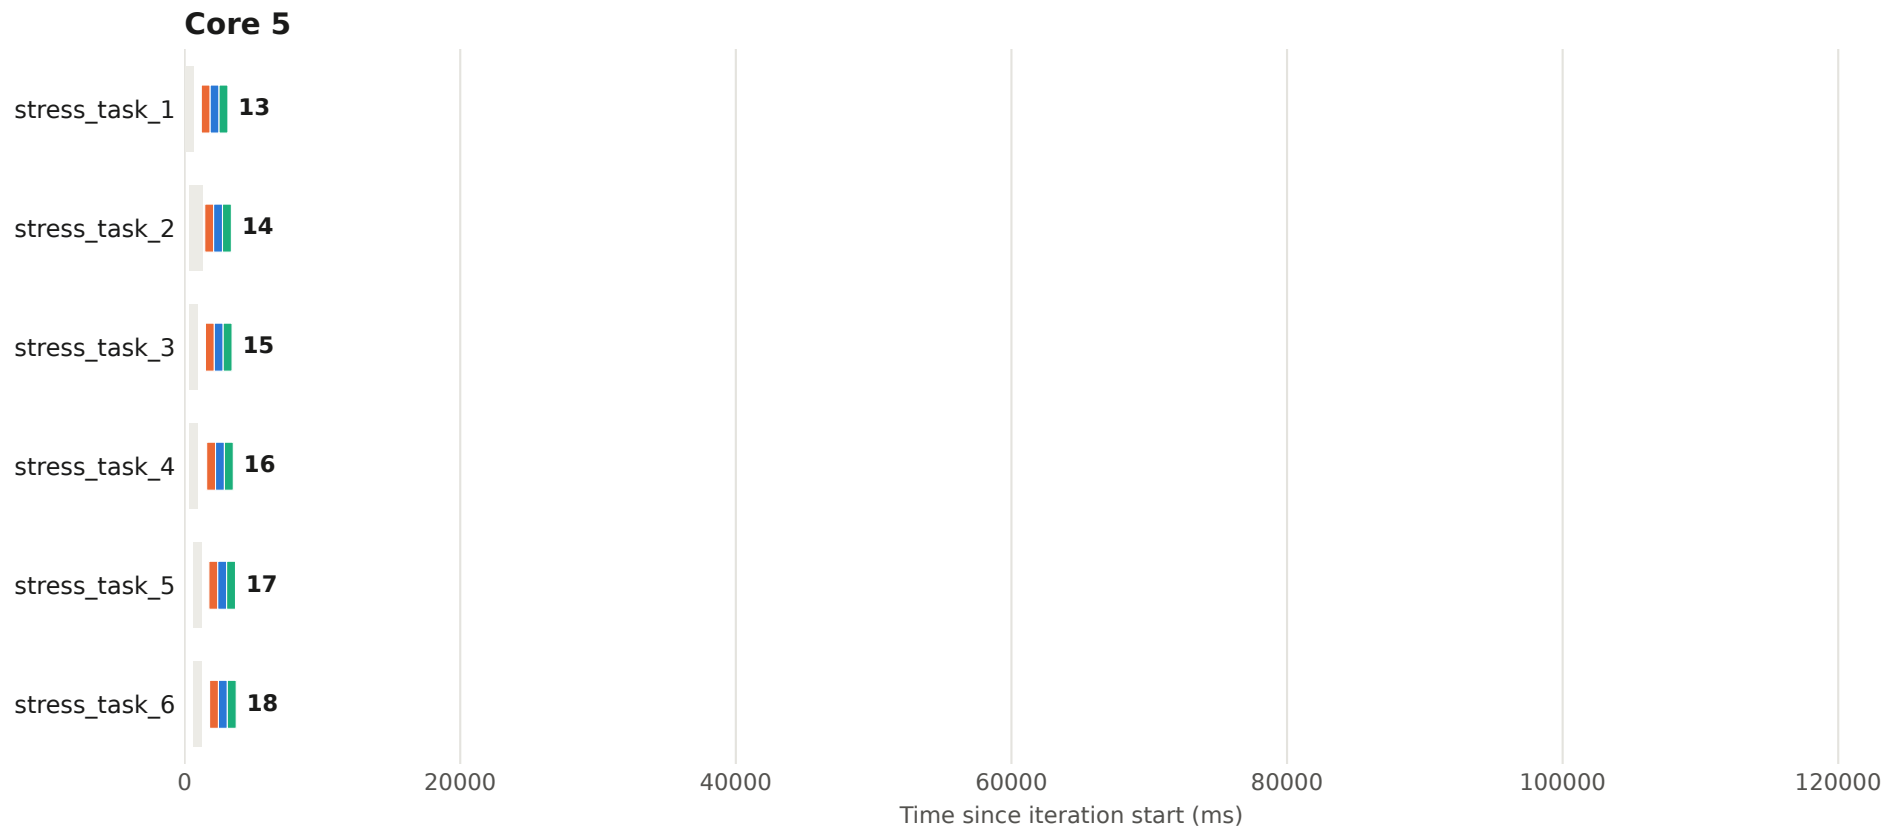


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 93 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

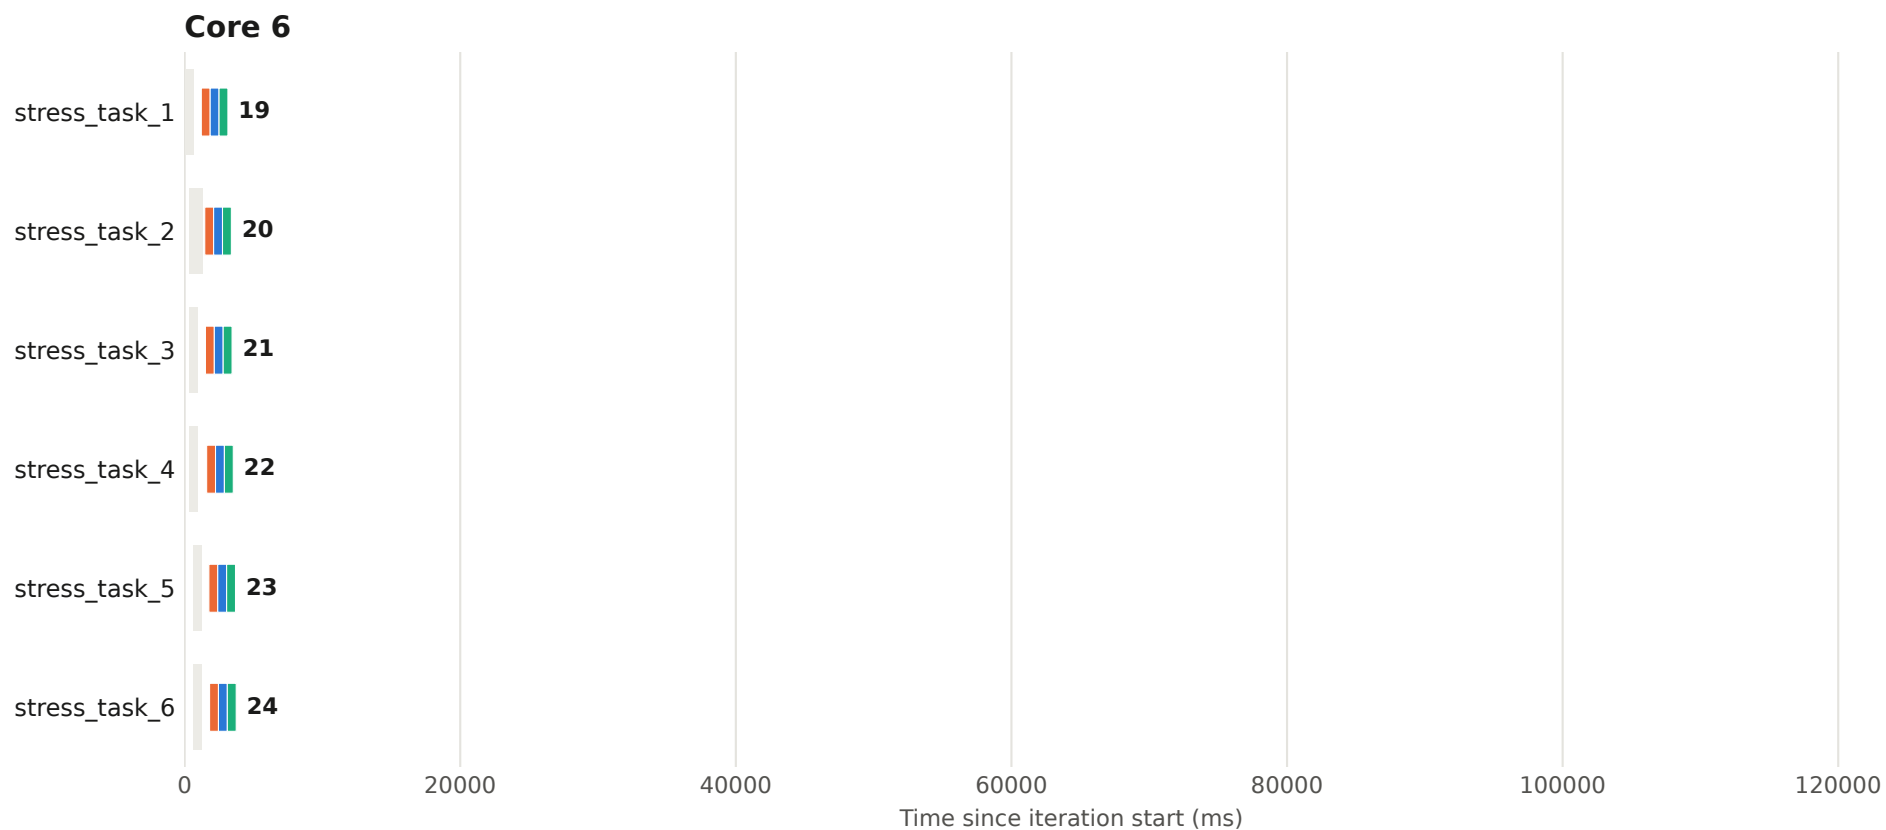


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 93 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

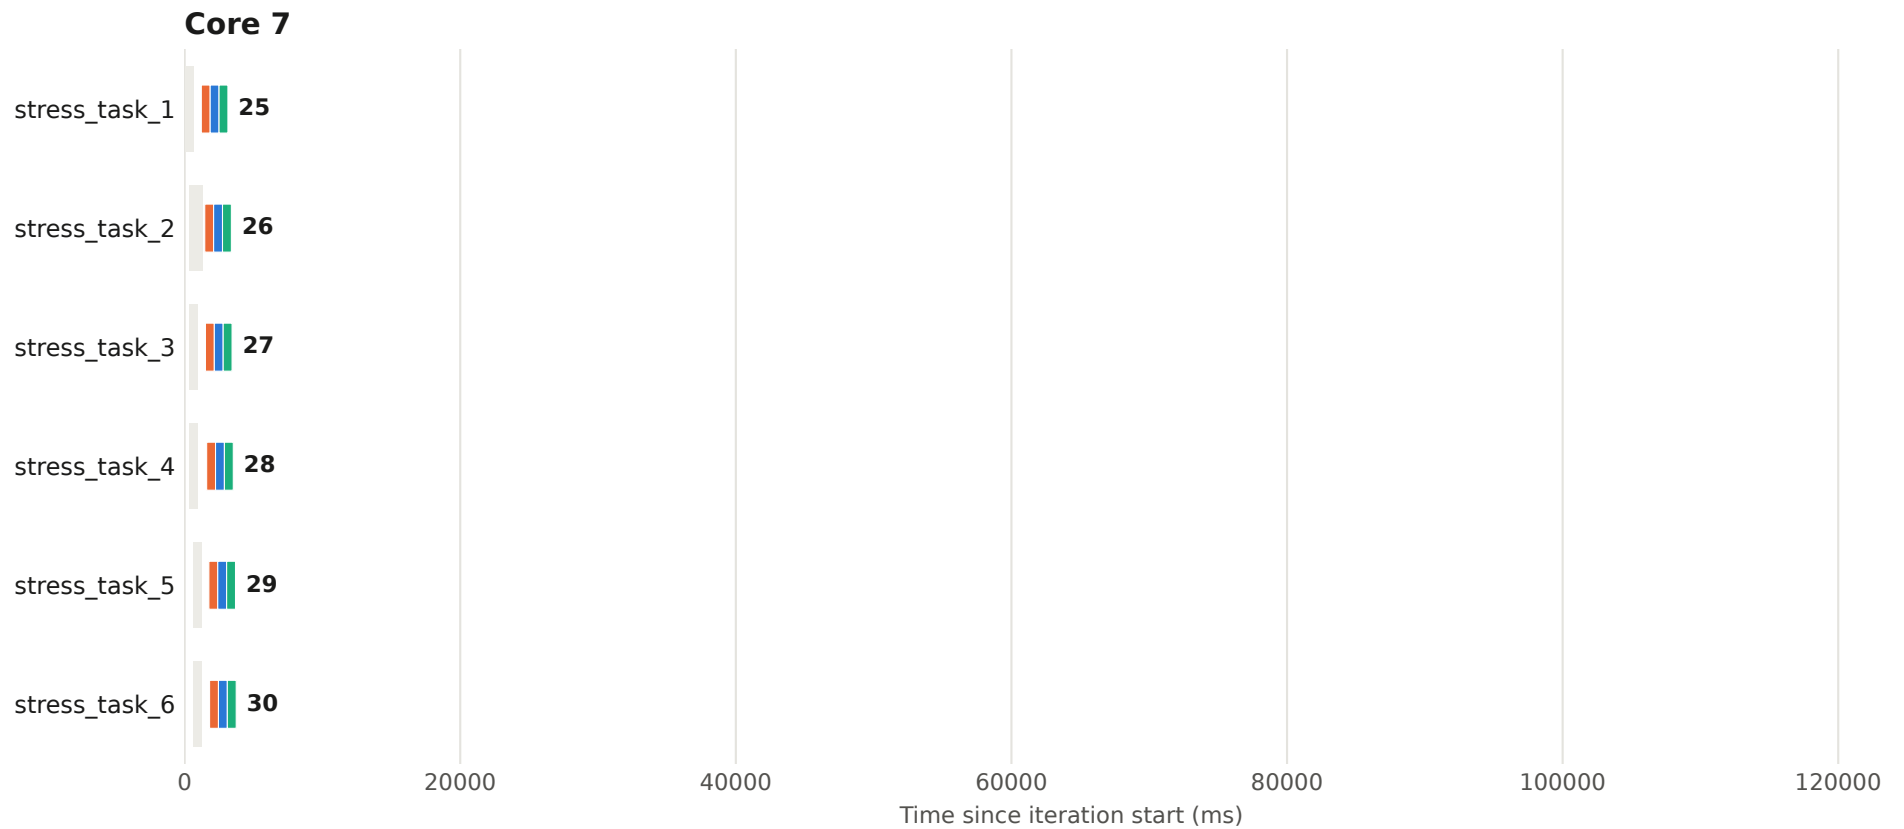


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 94 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

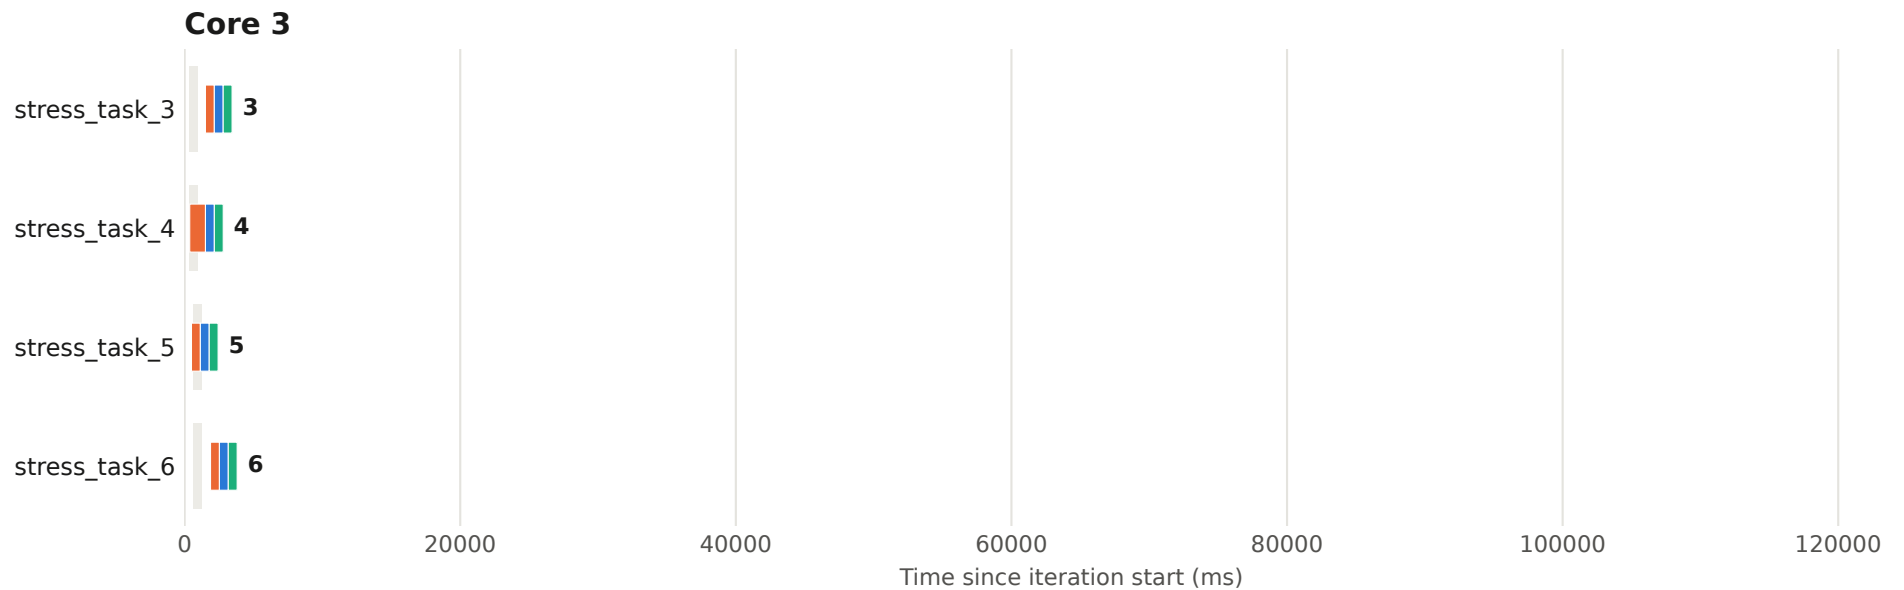

Execution plan - iteration 94 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

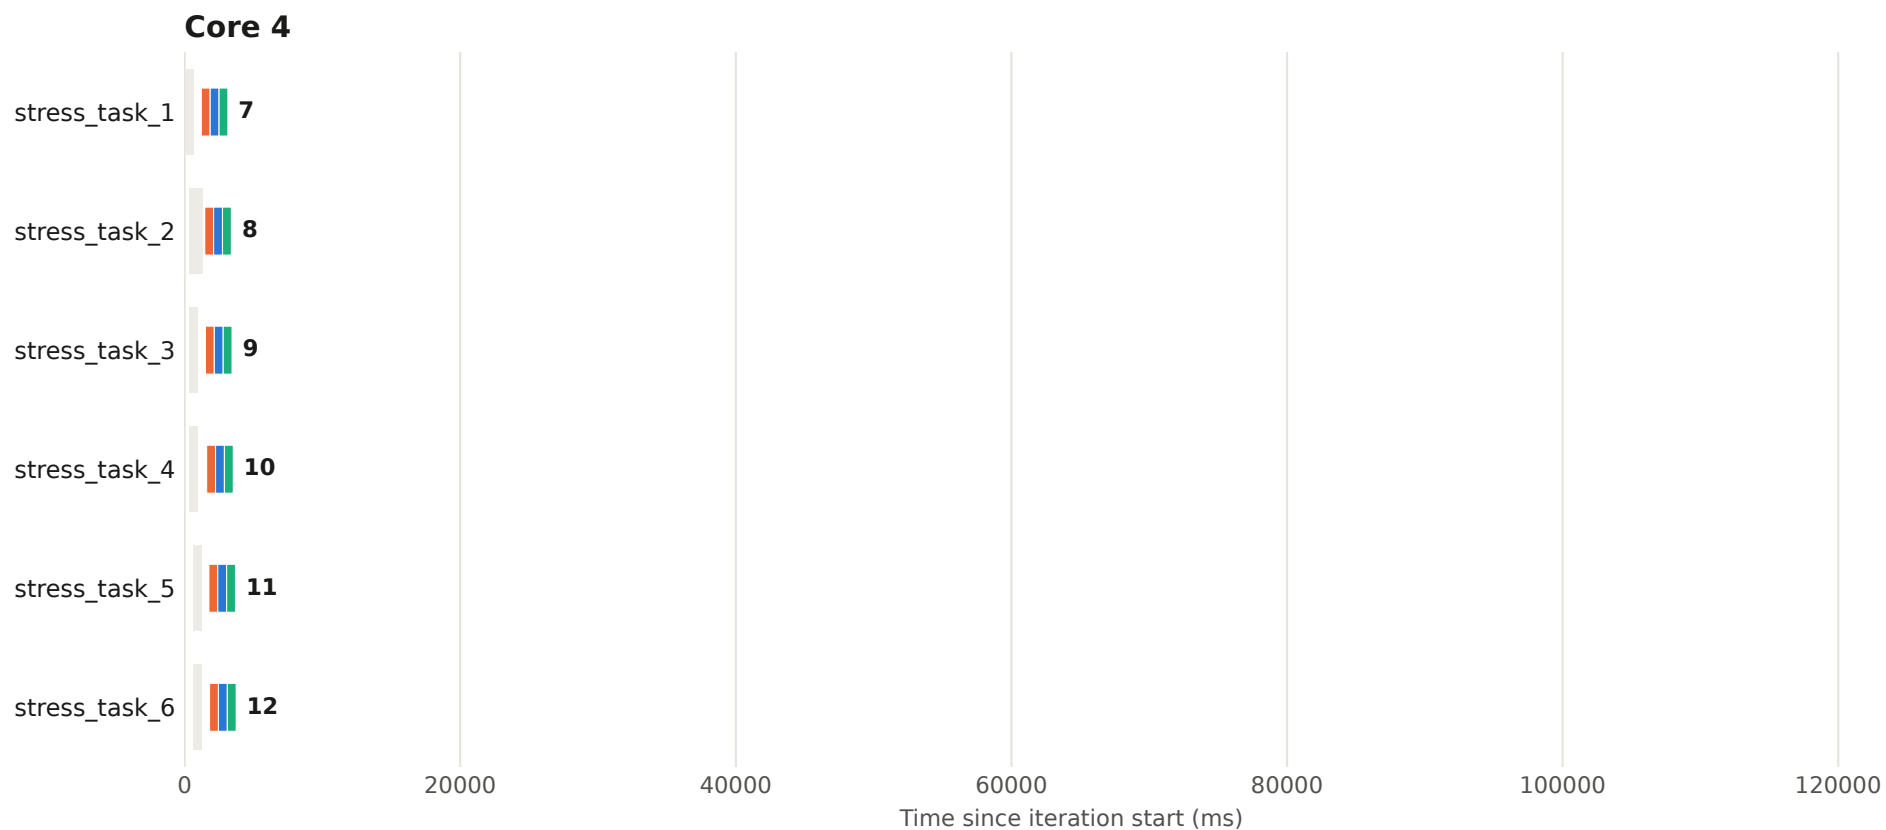


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 94 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

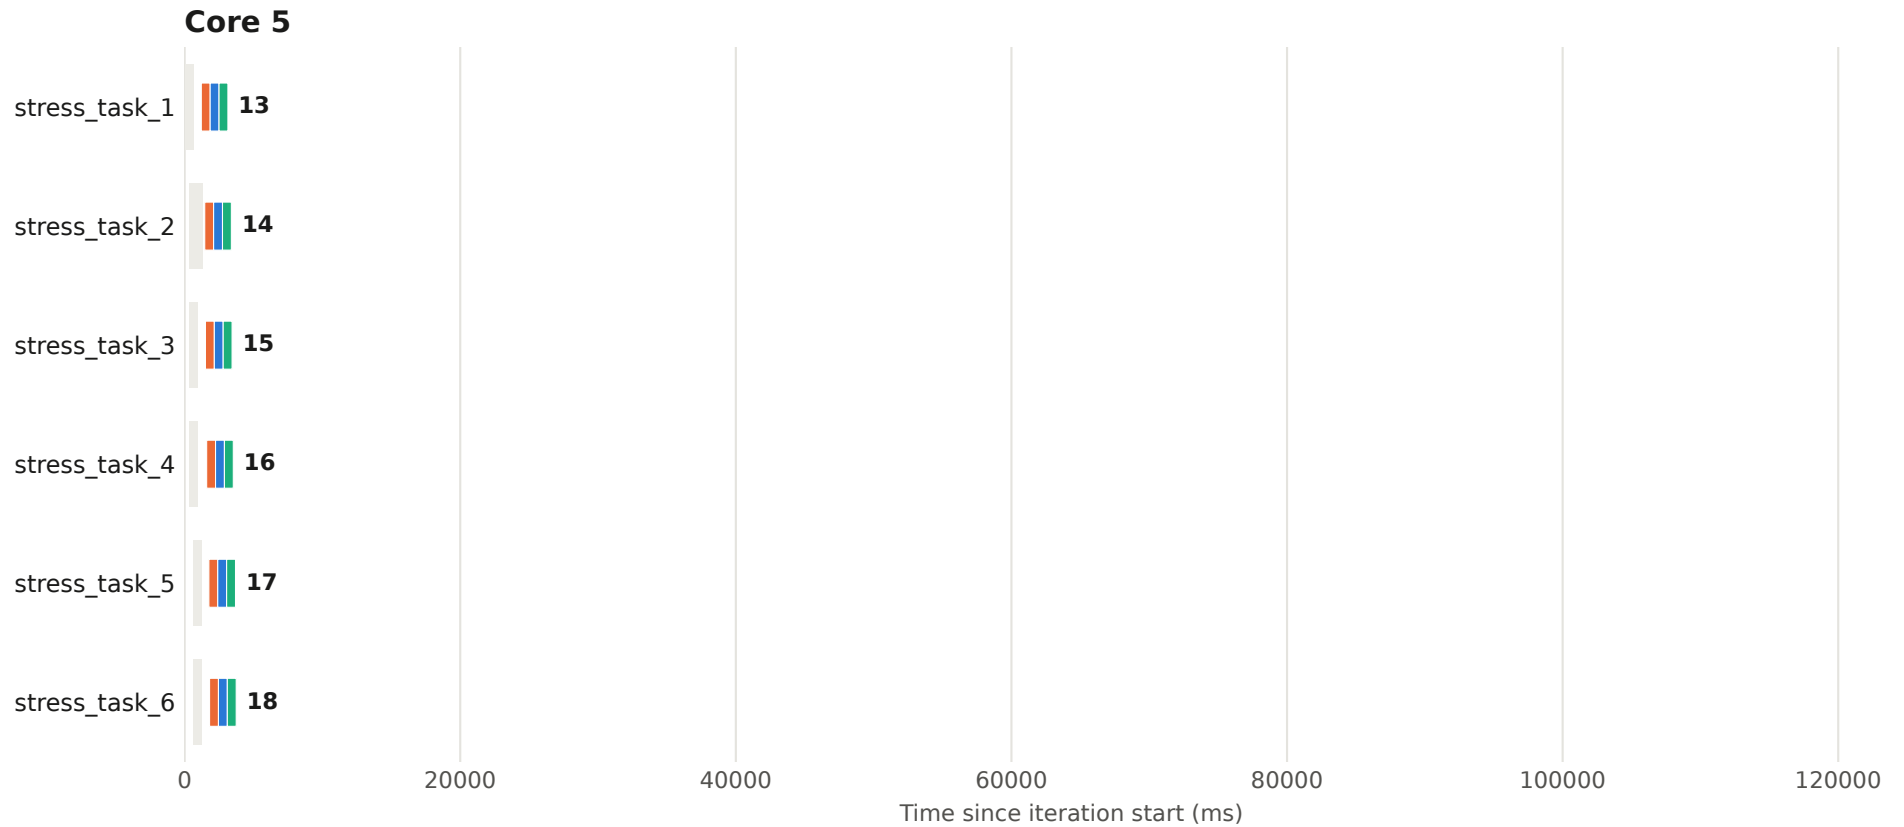


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 94 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

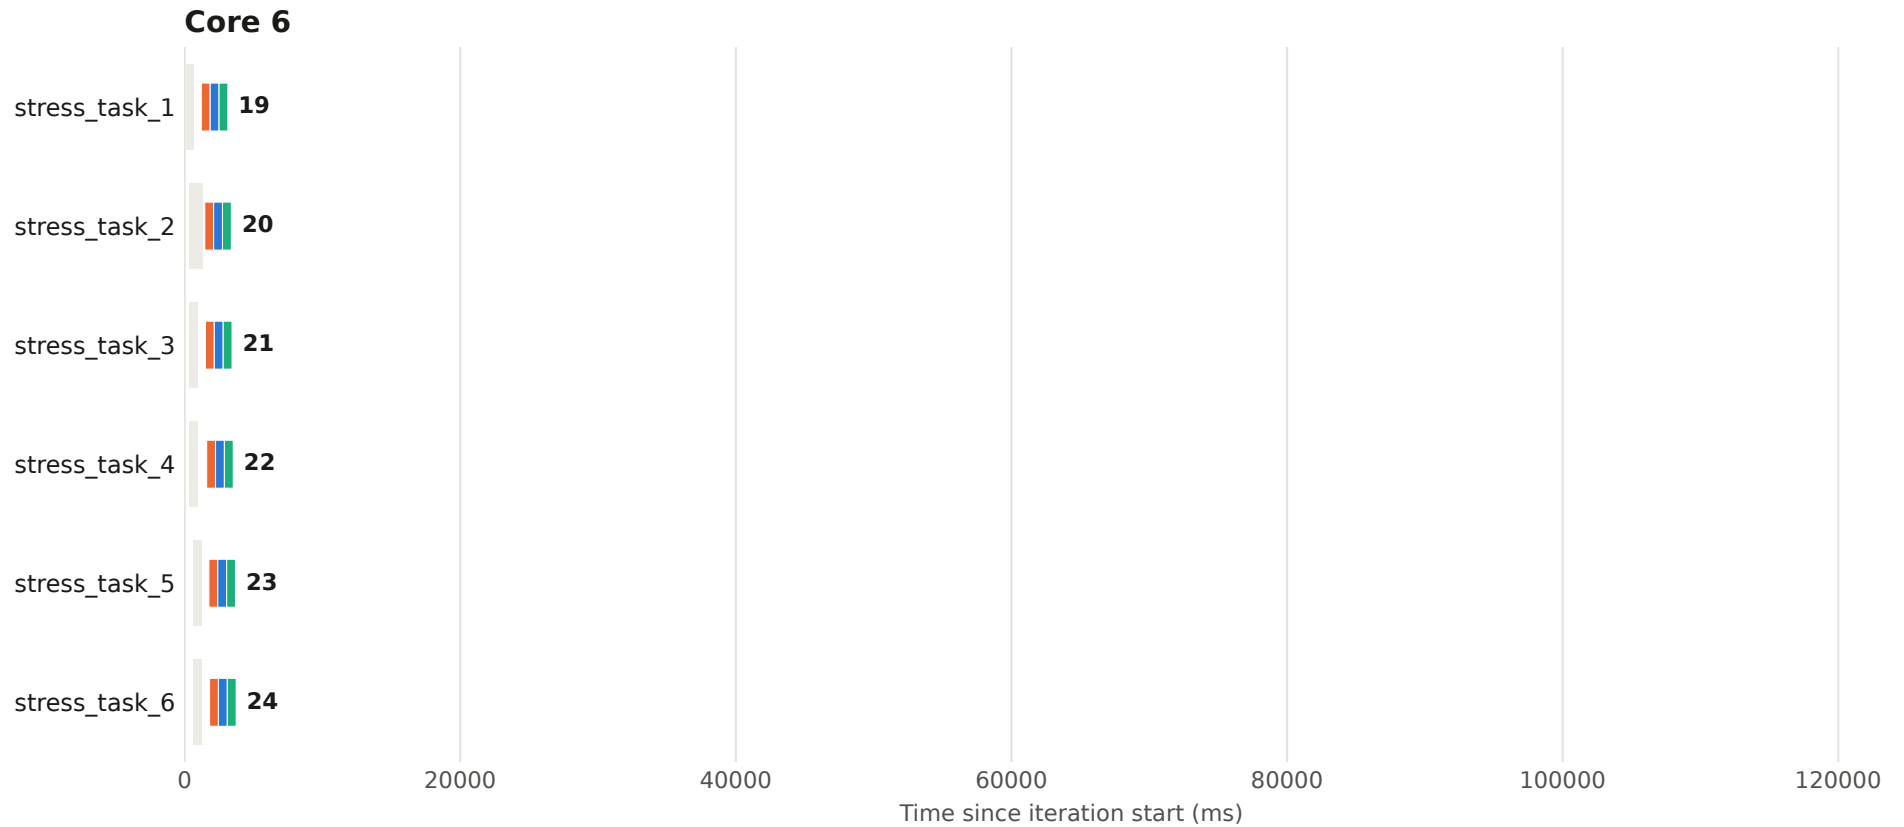


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 94 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

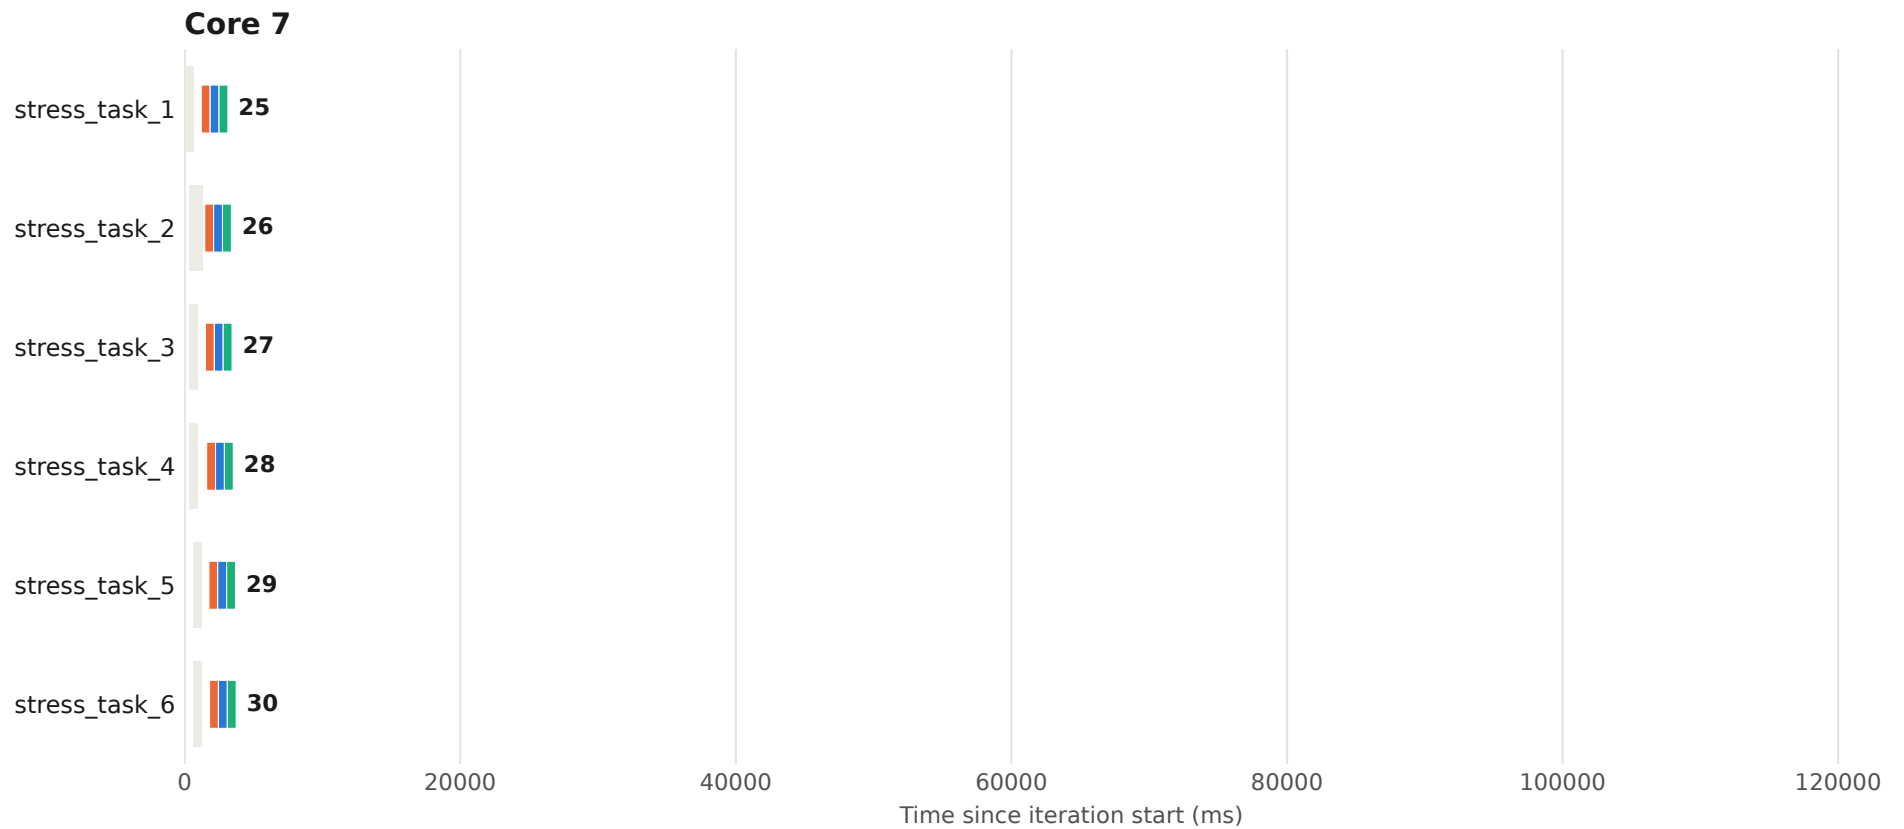


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 95 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

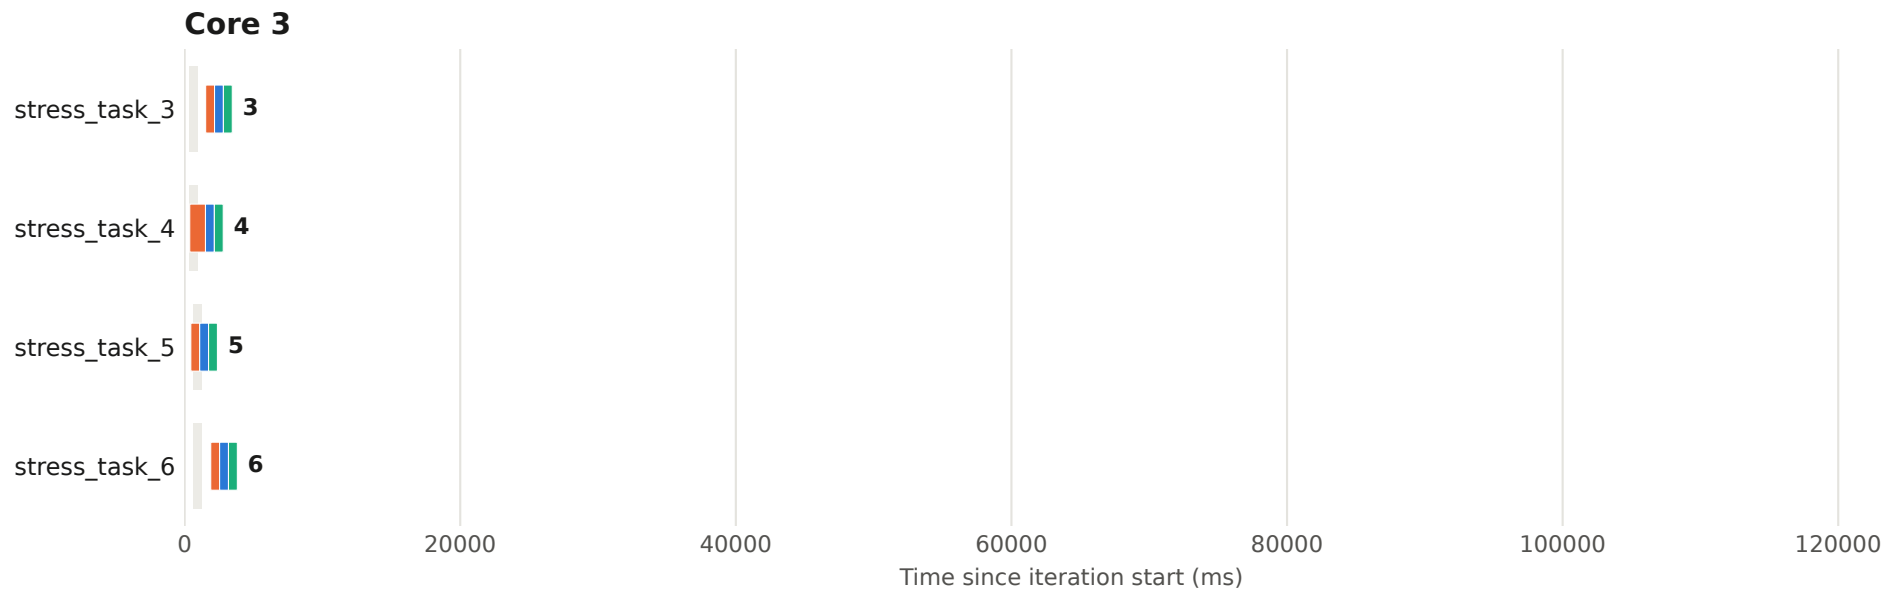

Execution plan - iteration 95 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

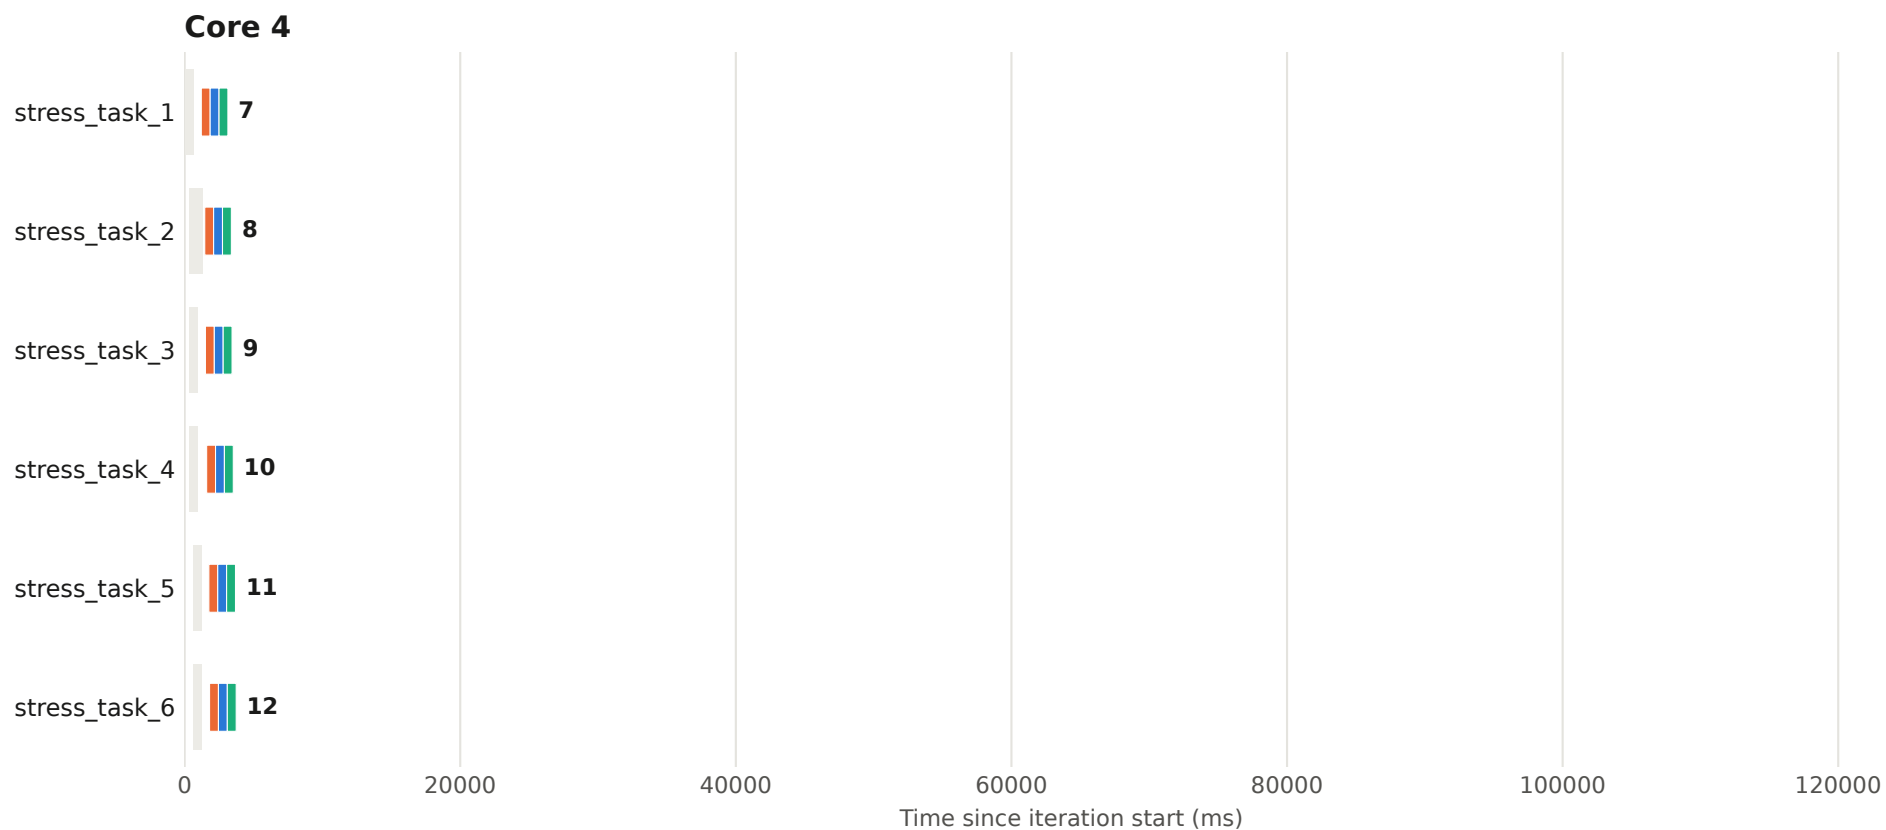


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 95 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

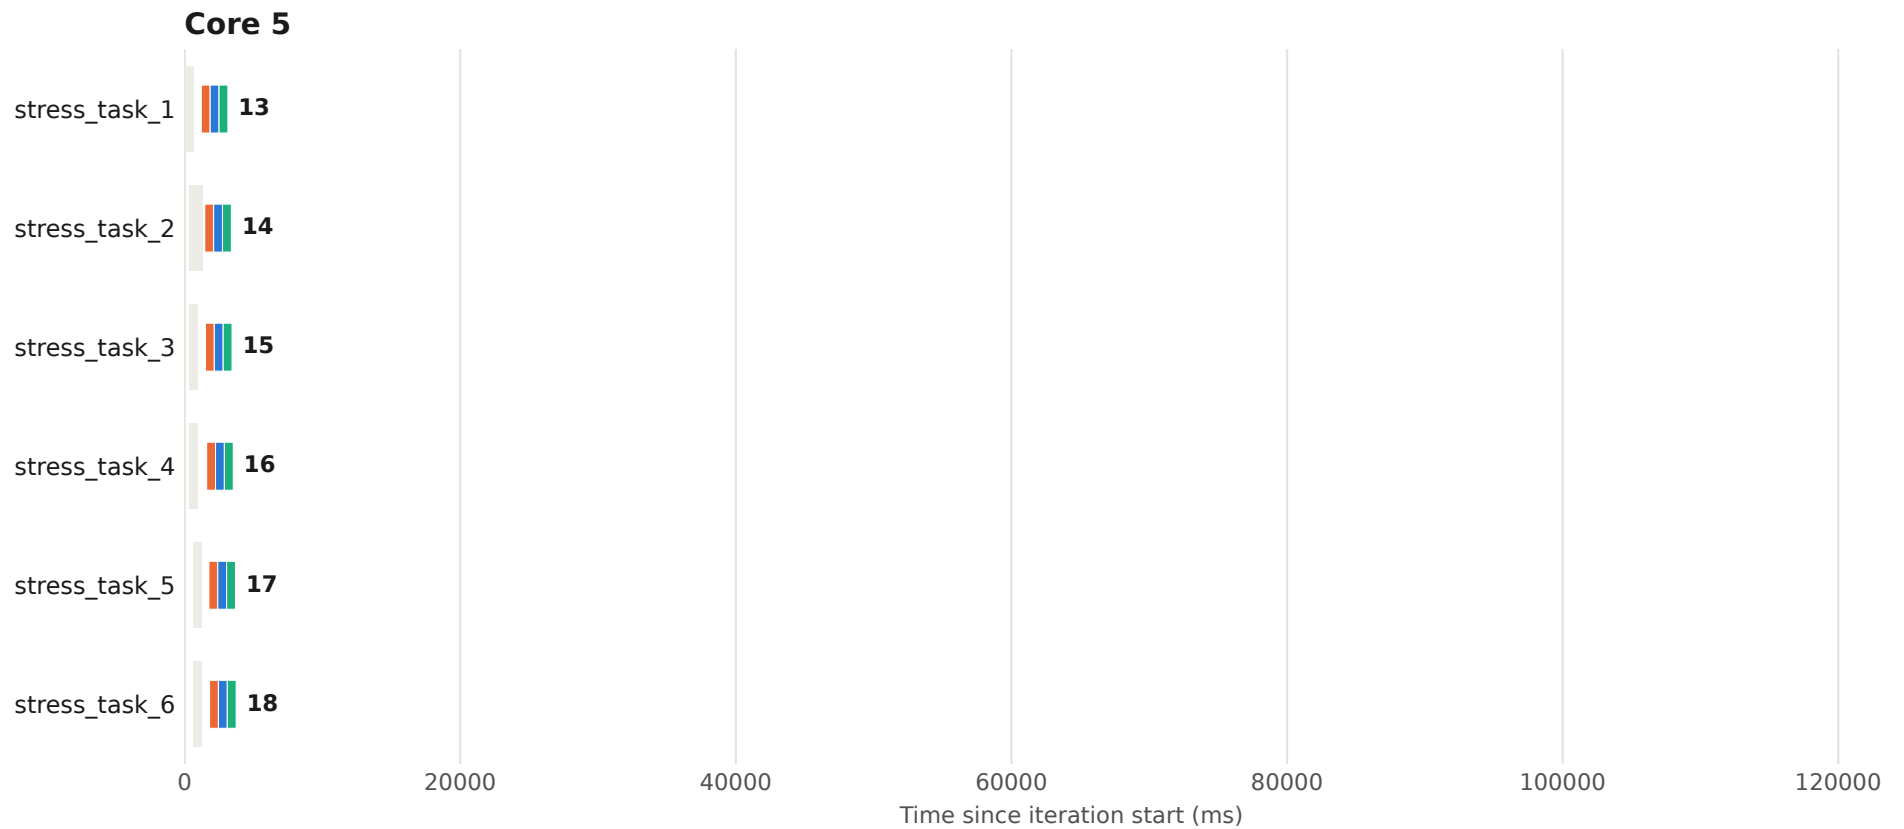


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 95 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

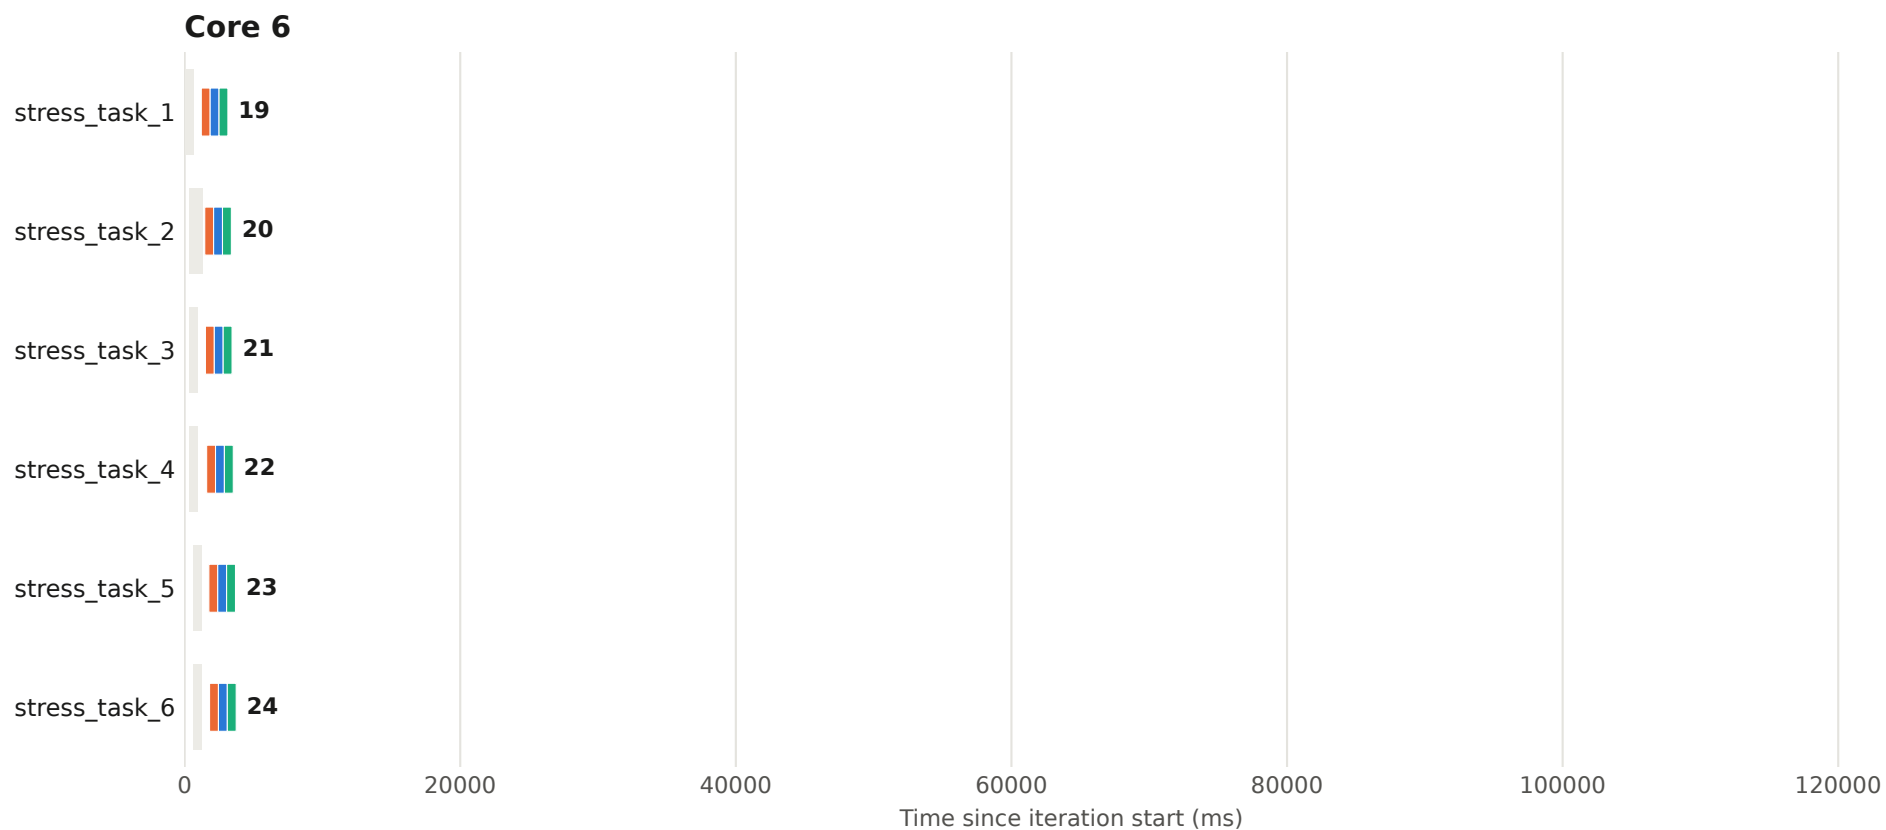


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 95 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

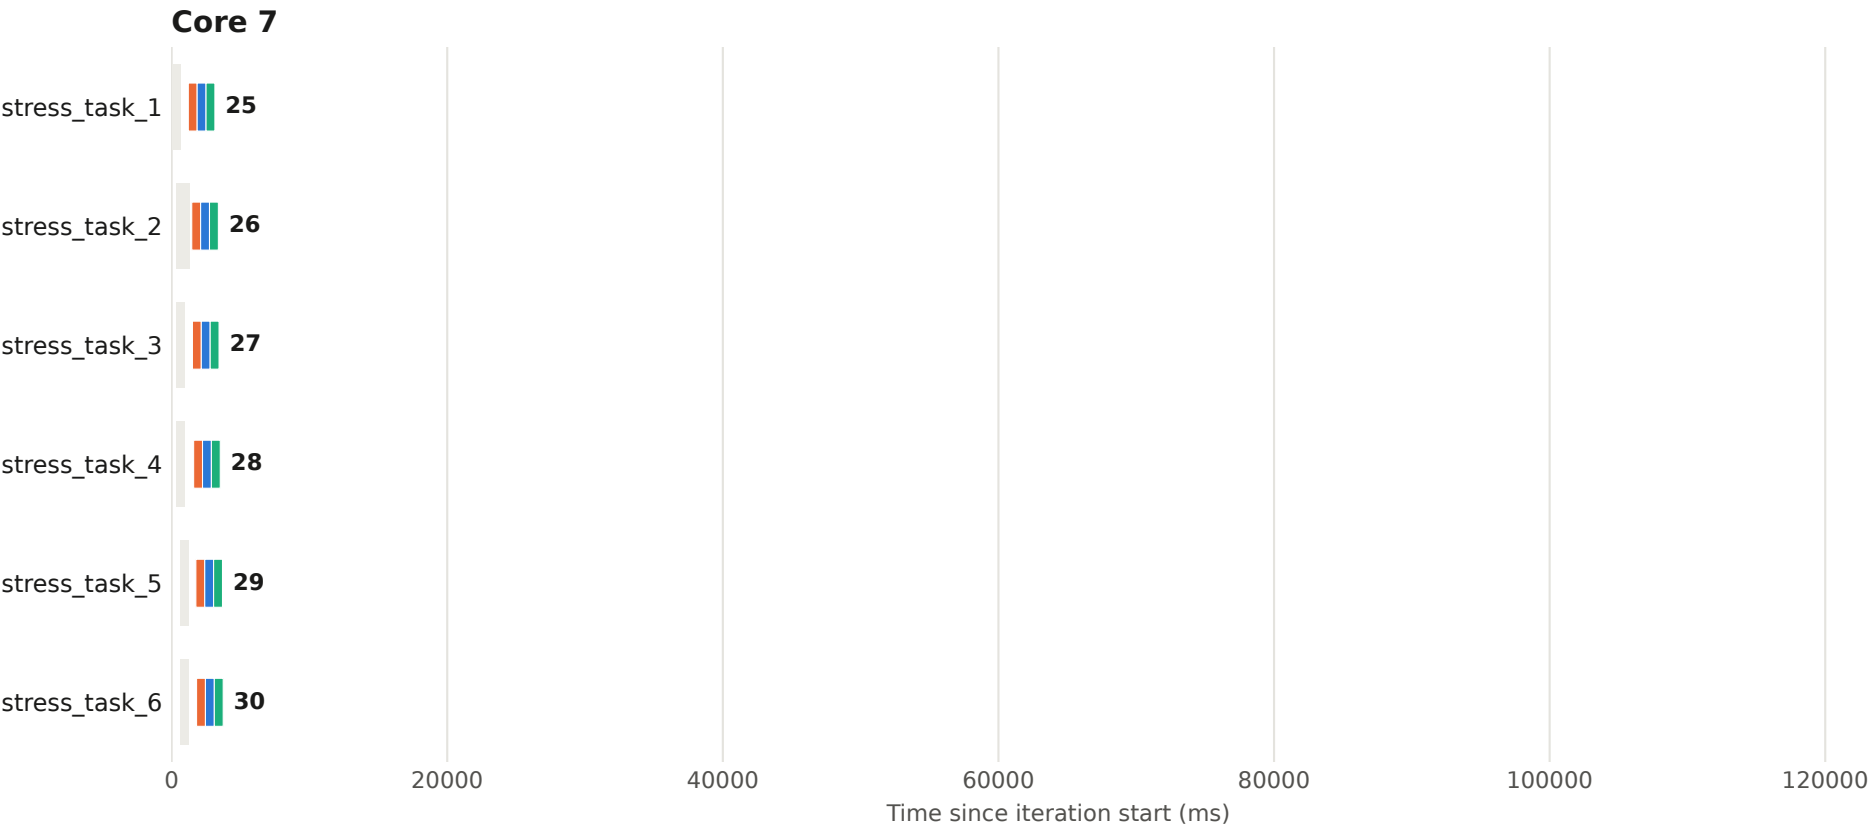


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 96 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

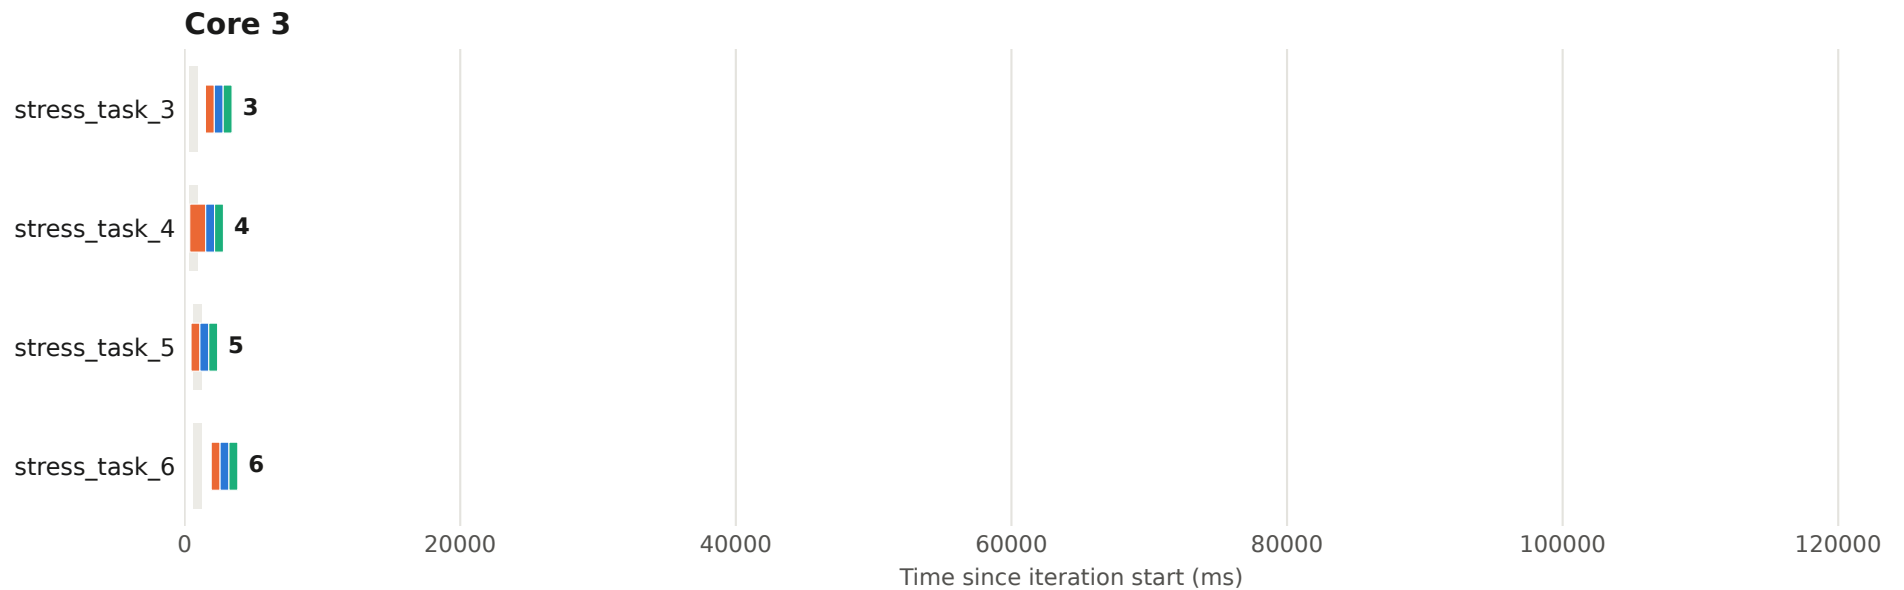


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 96 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

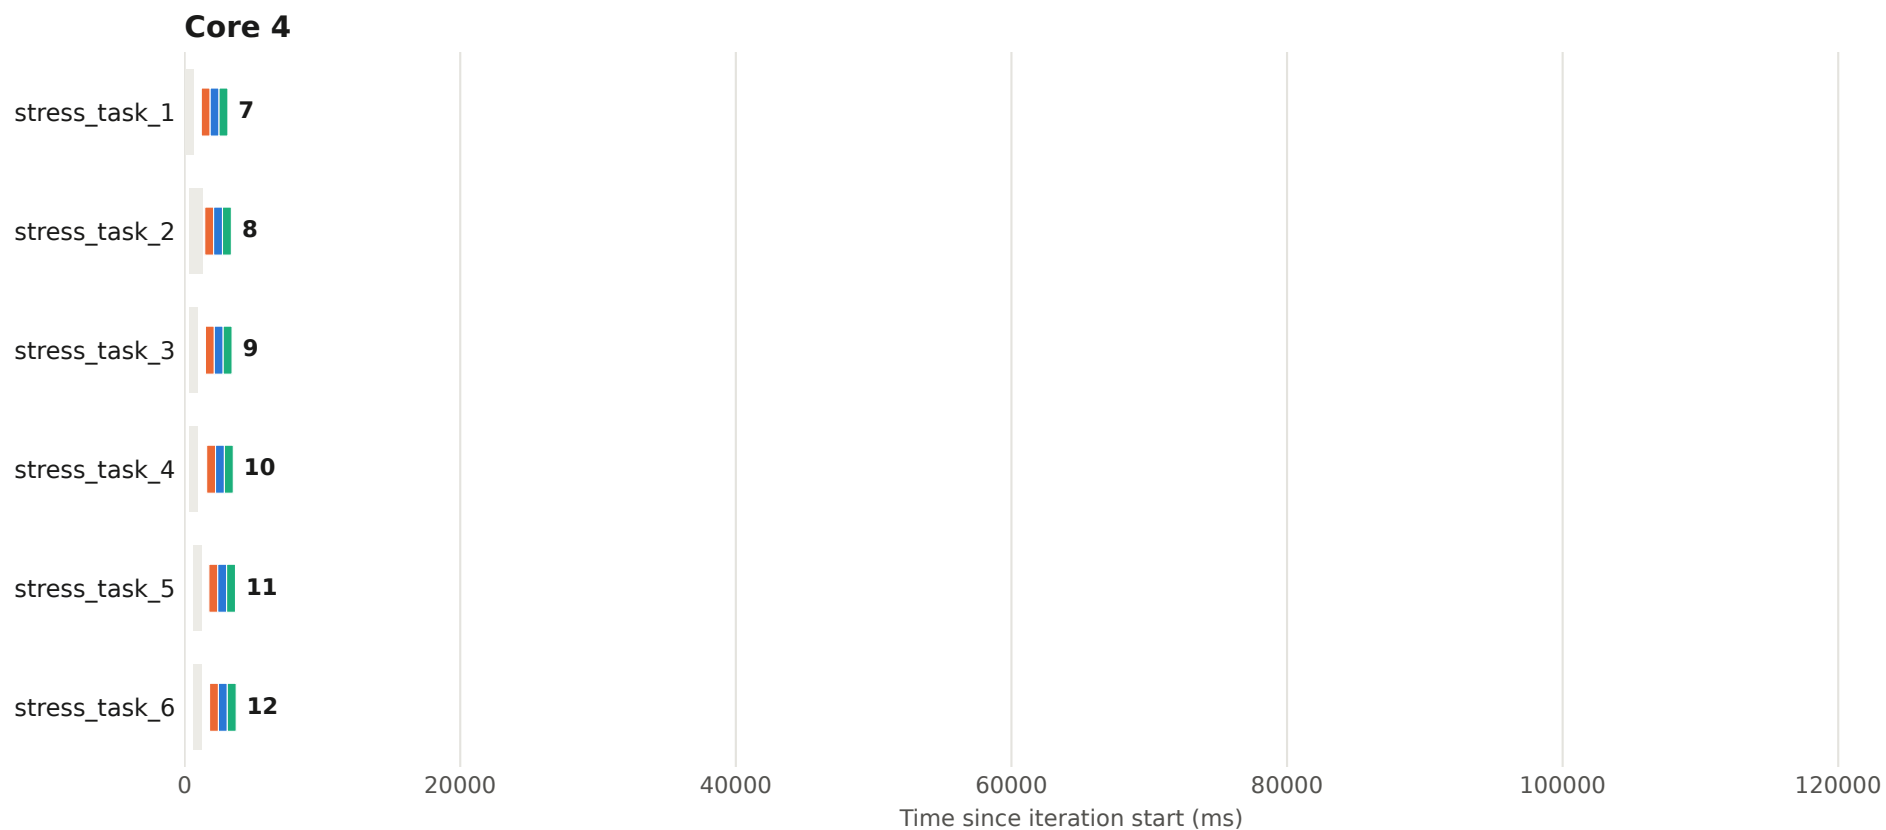


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 96 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

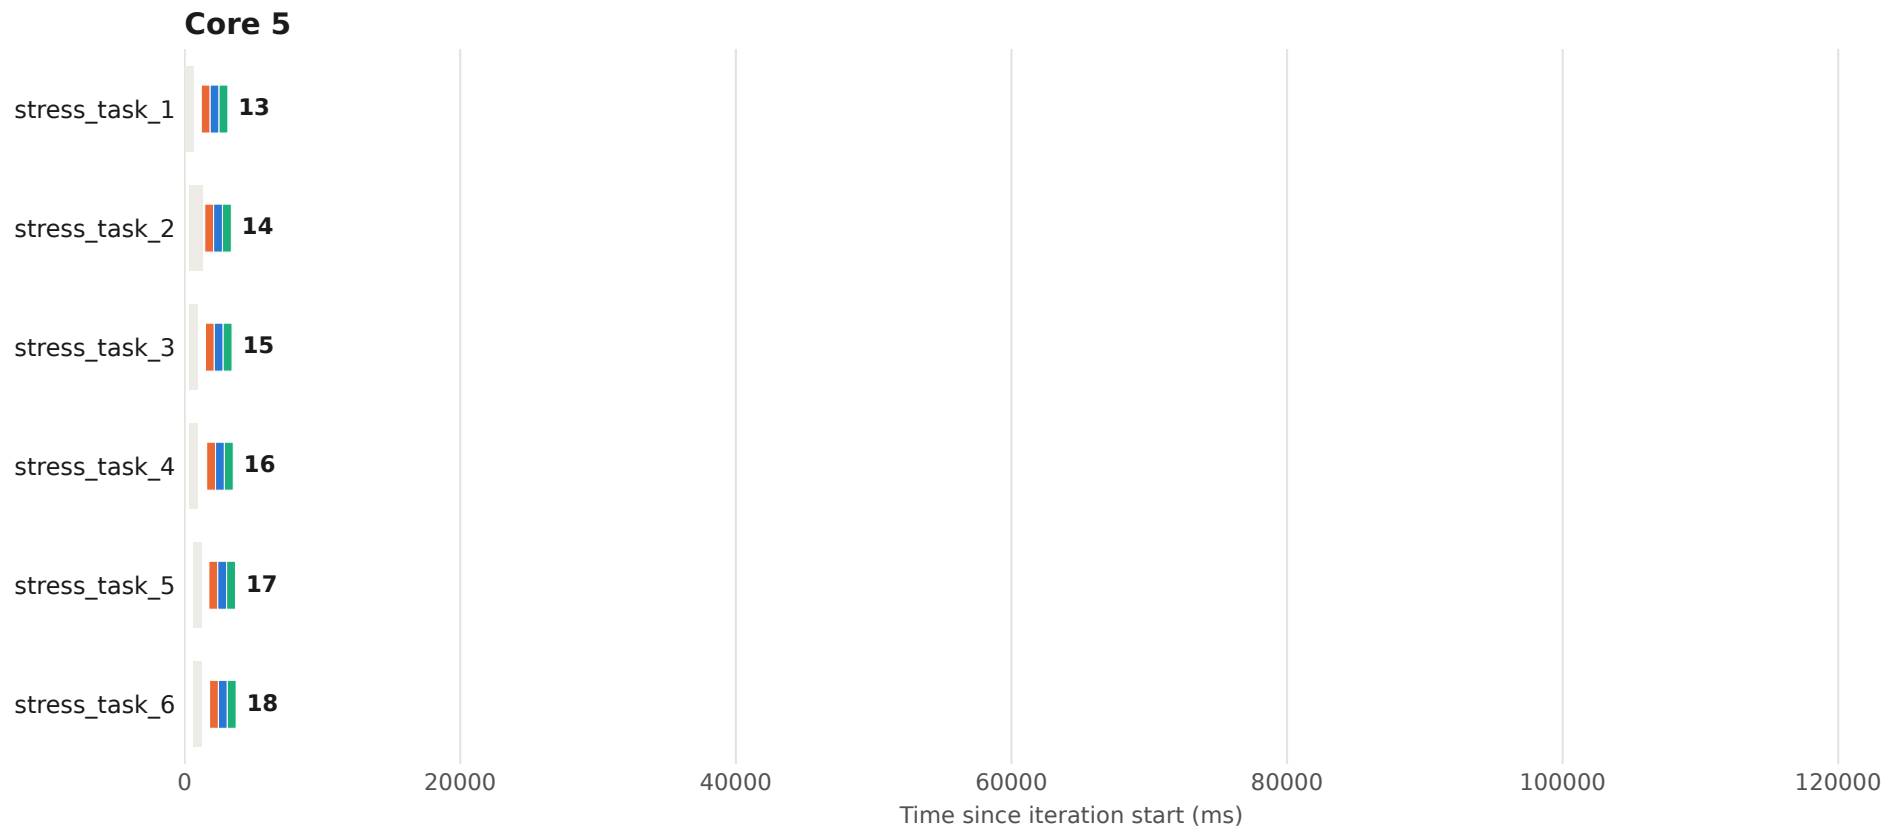


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 96 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

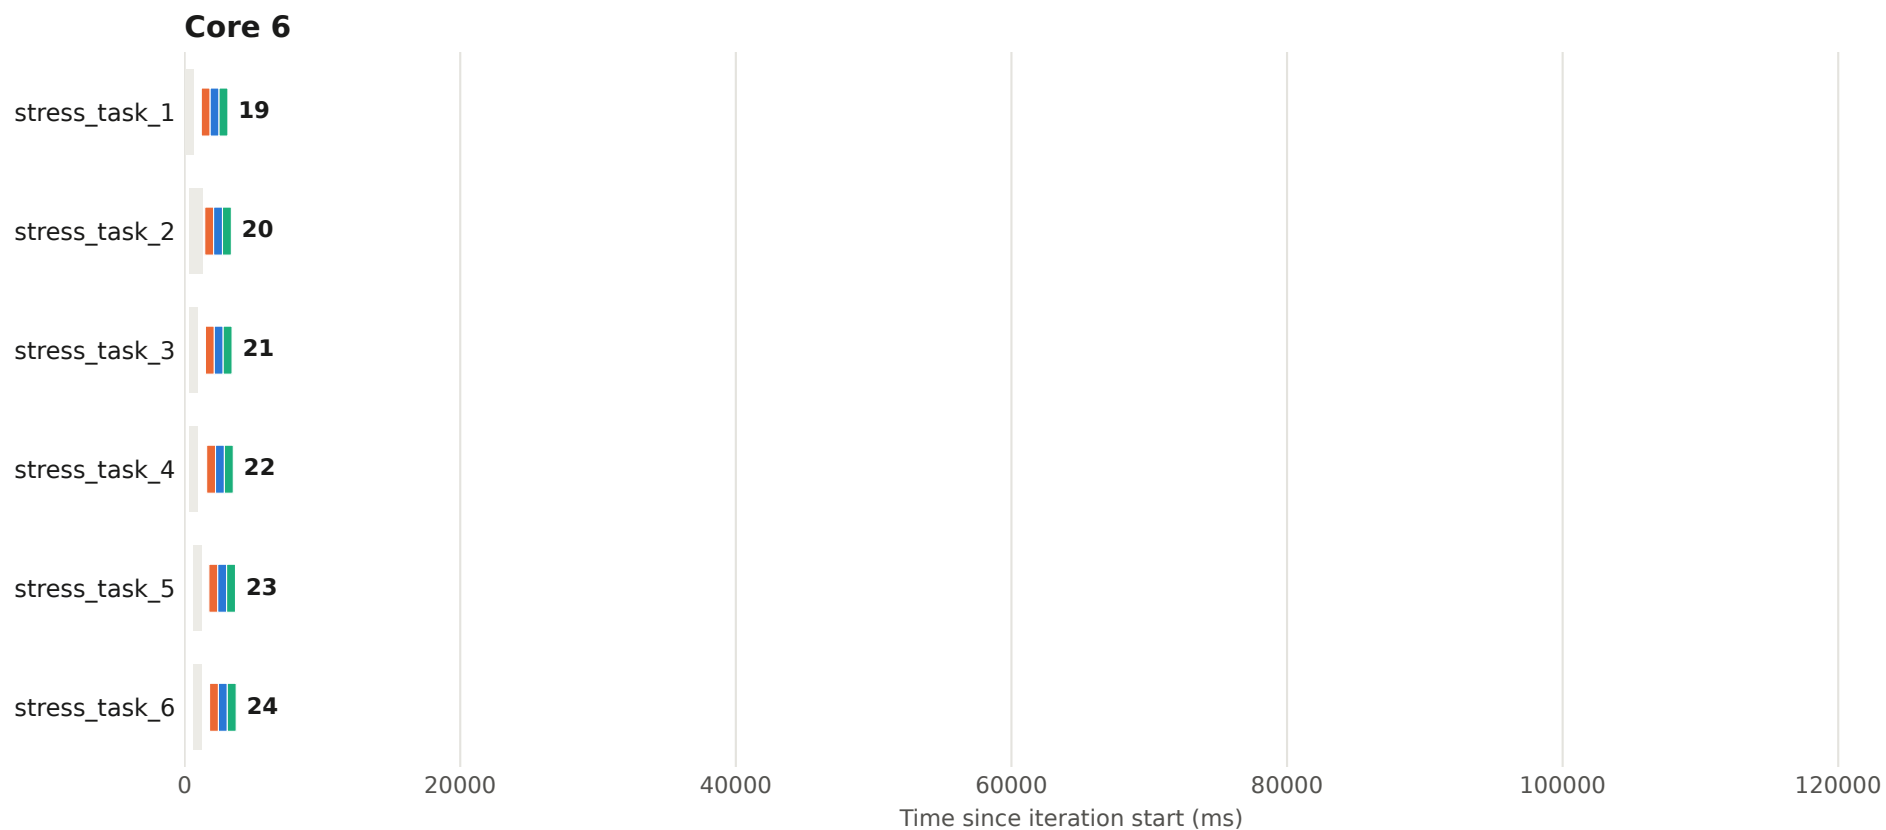


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 96 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

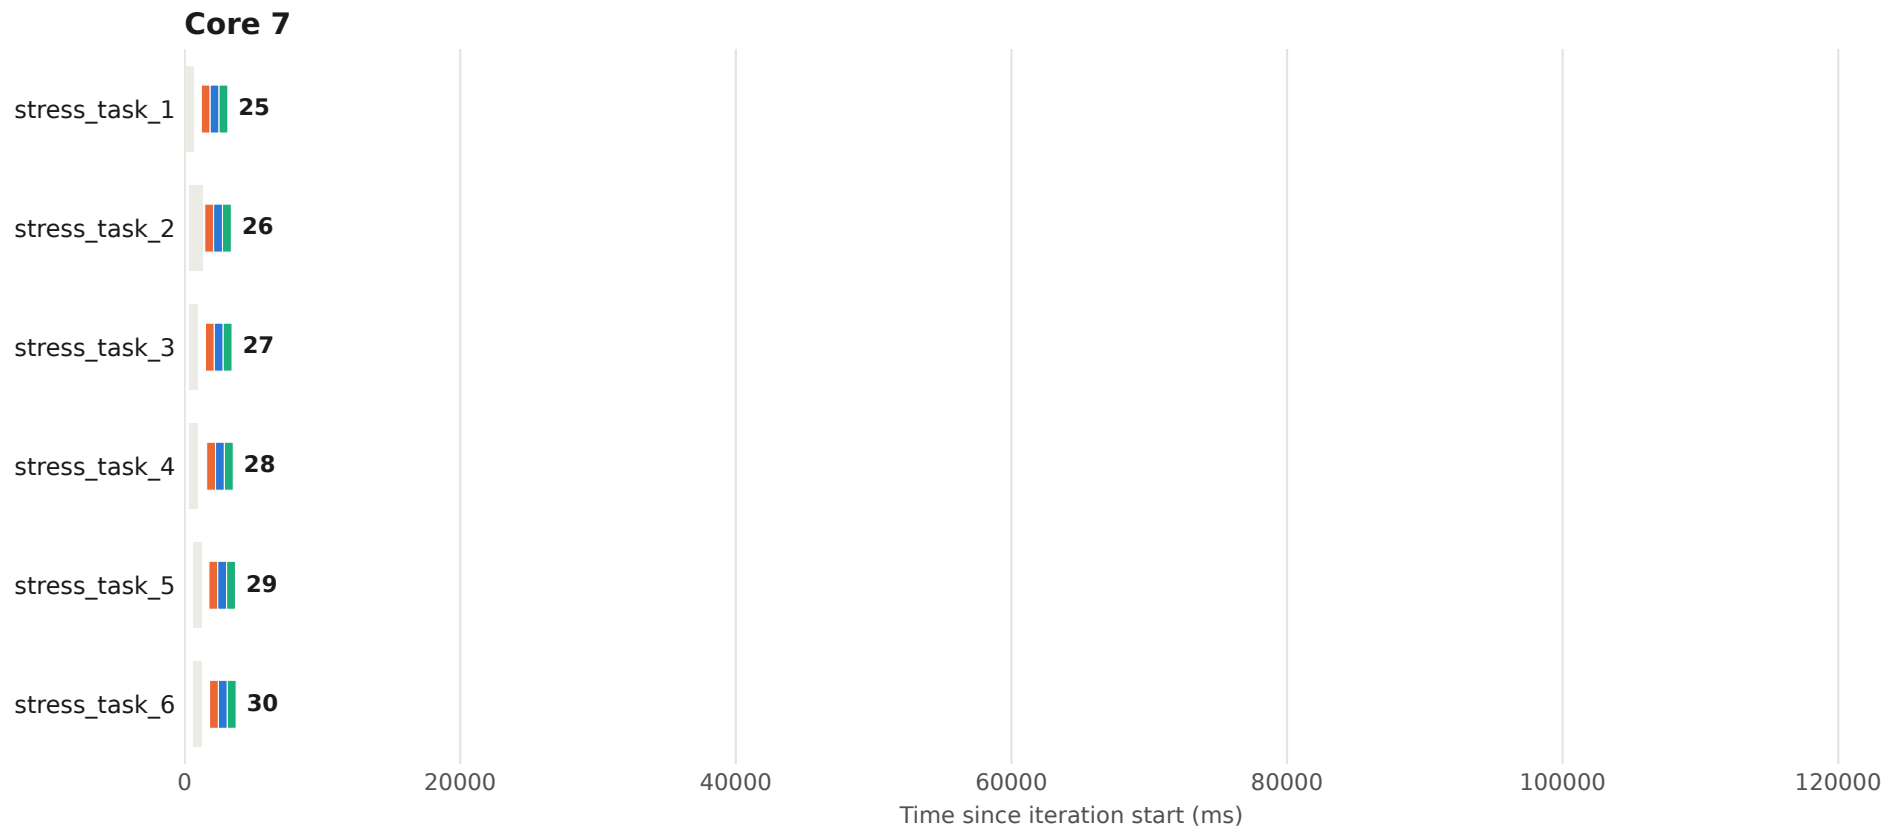


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 97 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

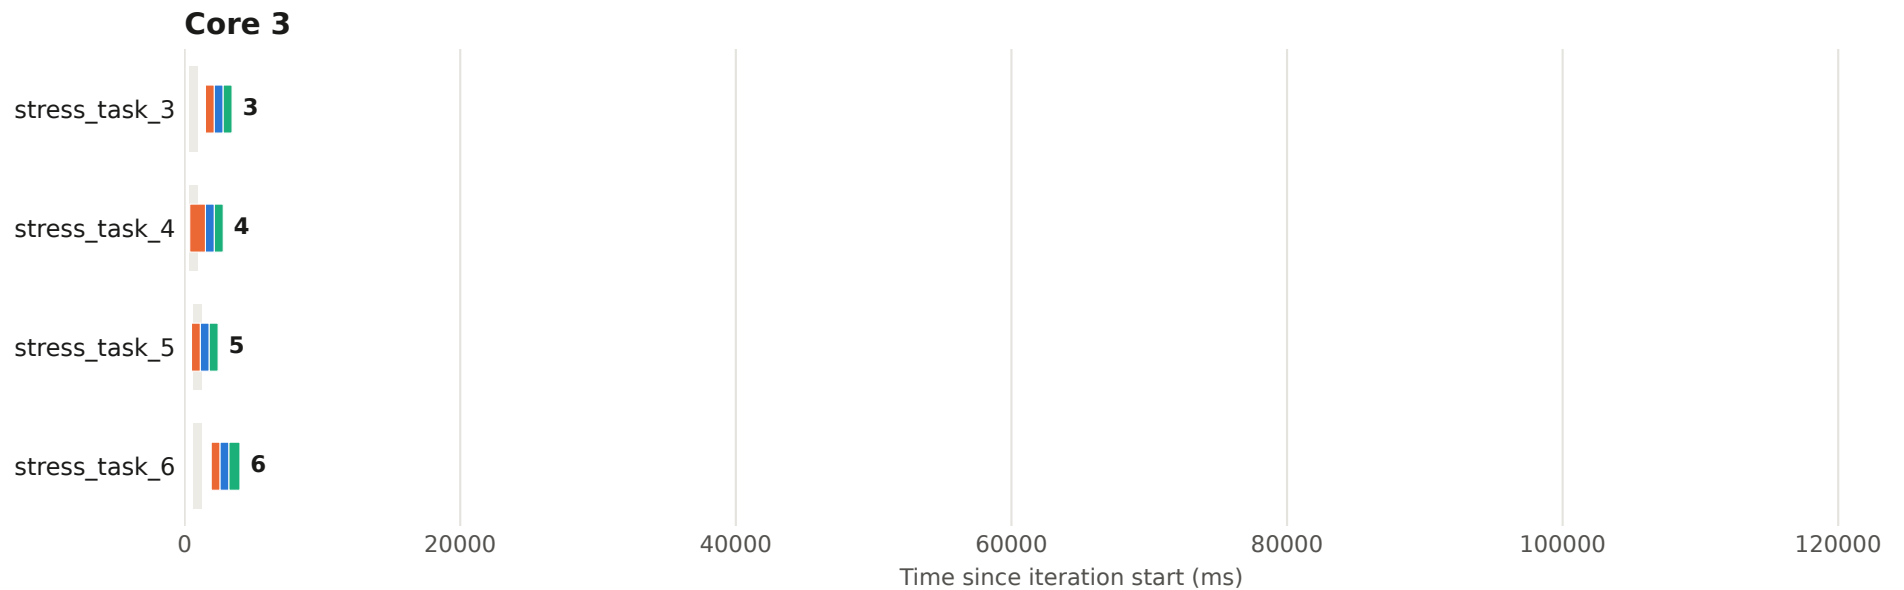


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 97 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

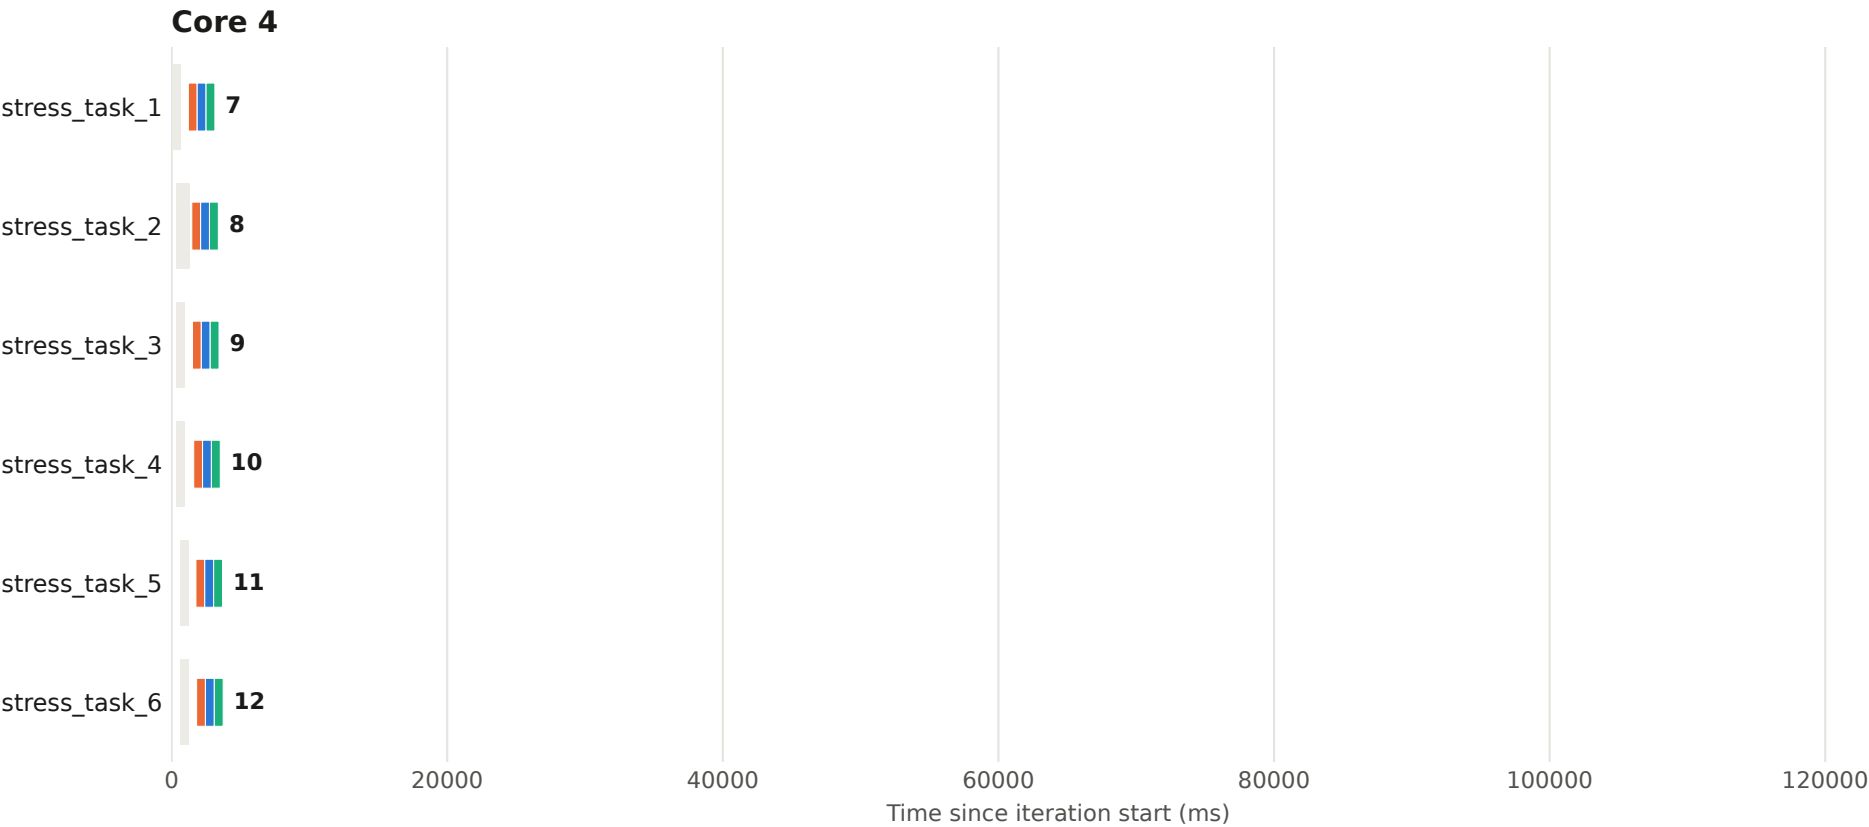


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 97 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

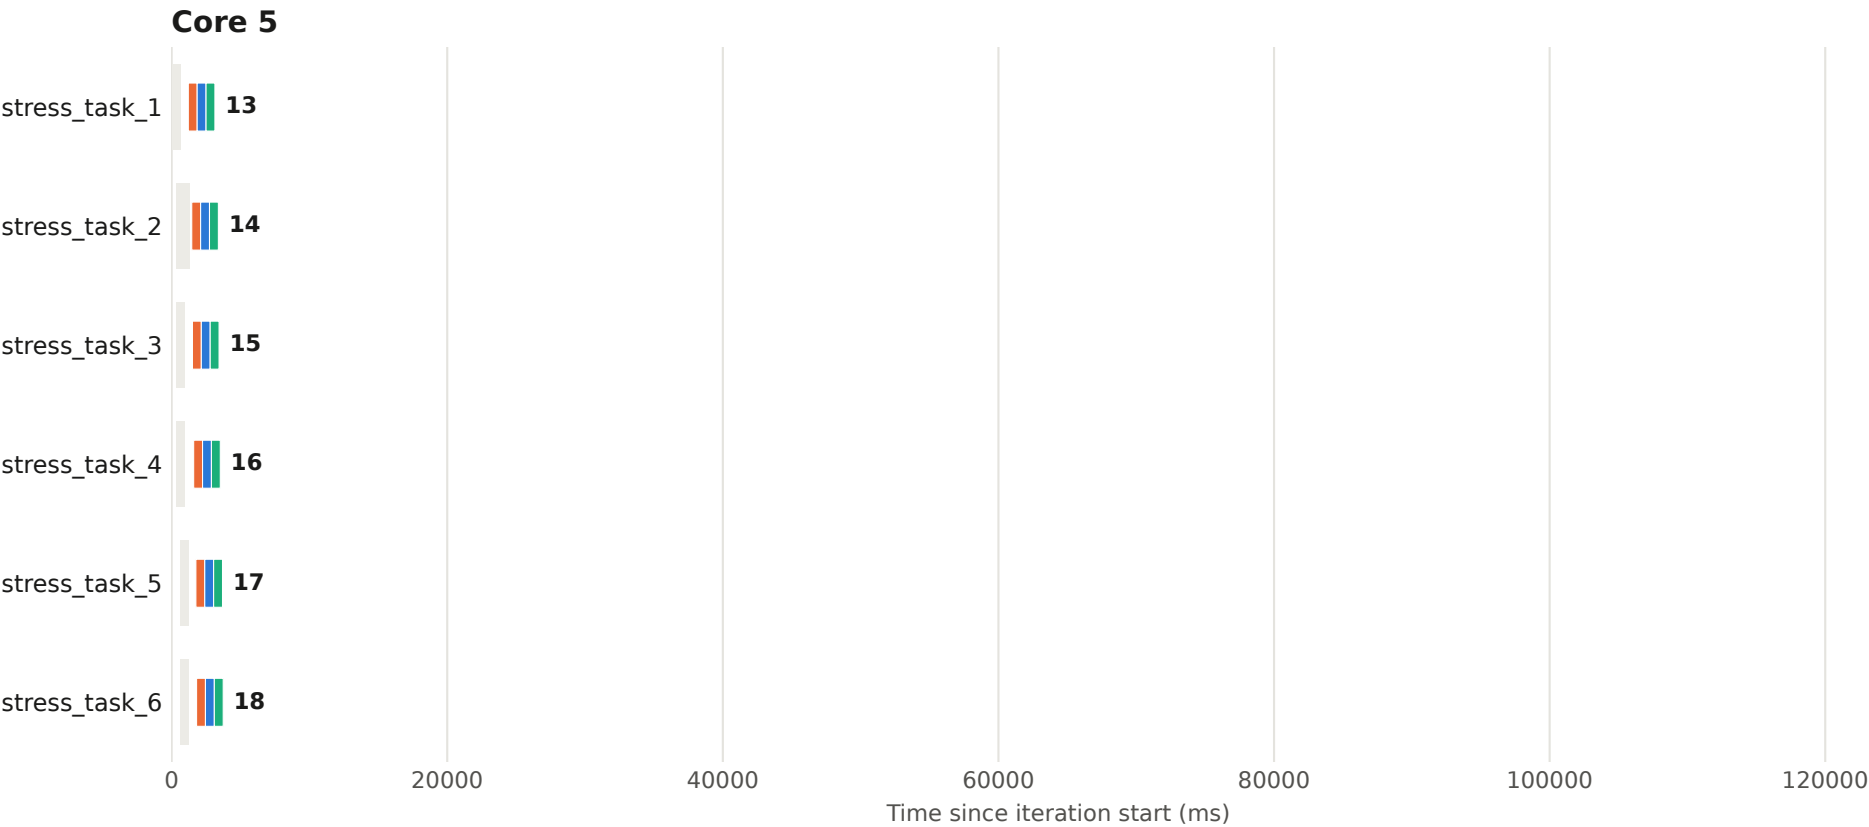


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 97 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

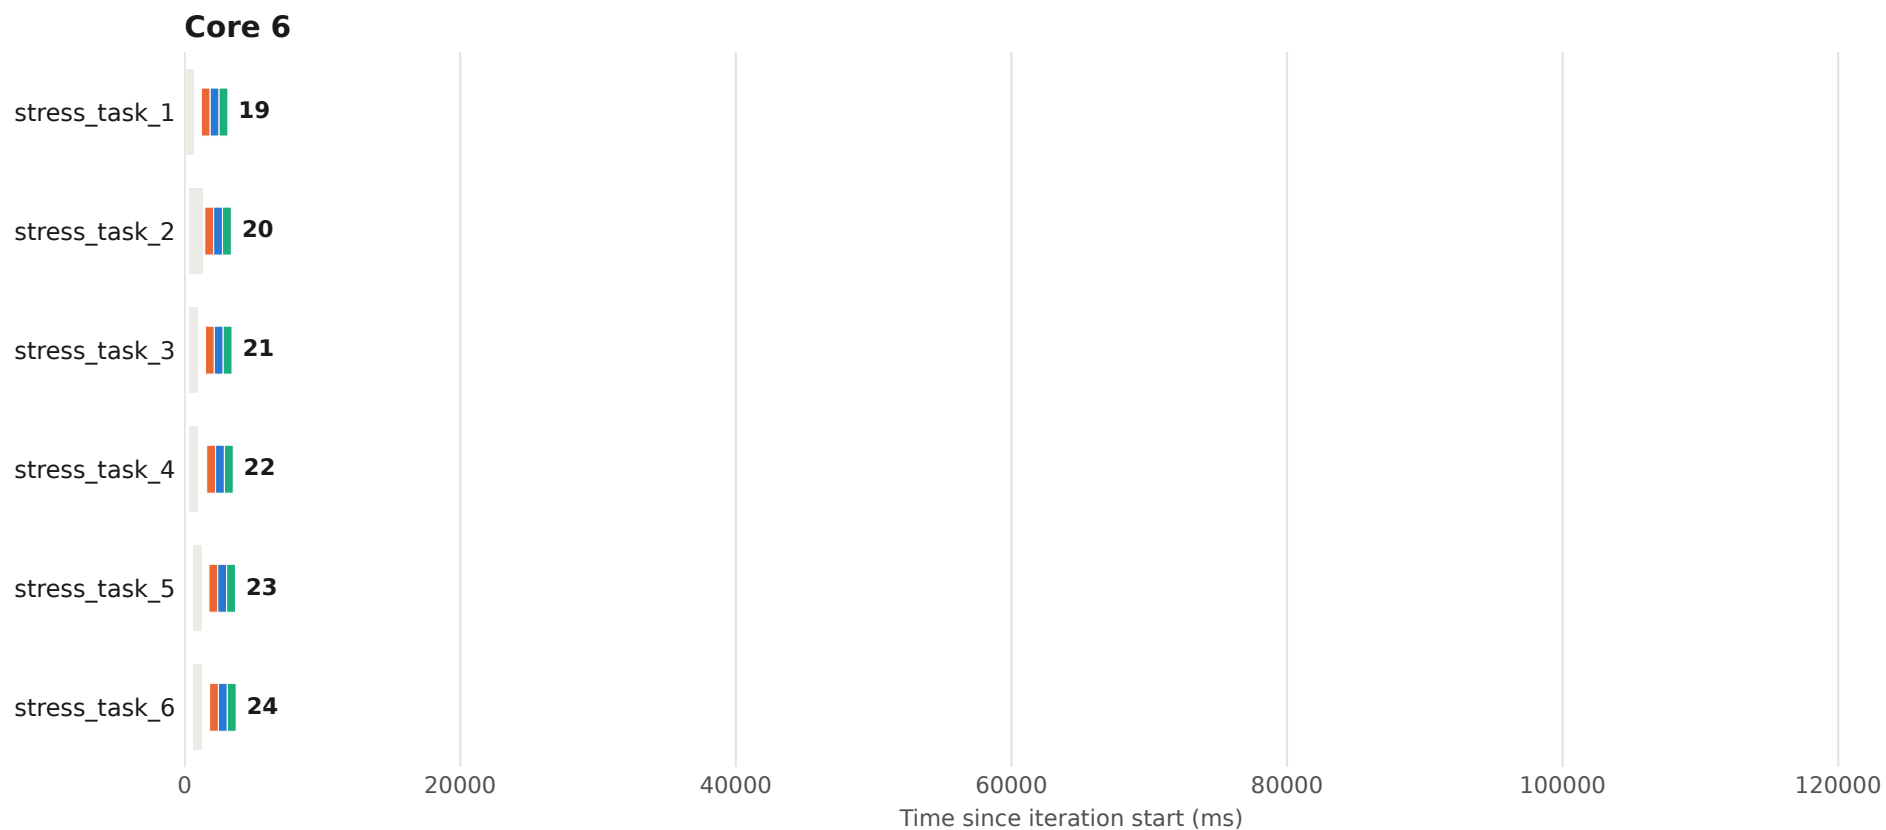


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 97 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

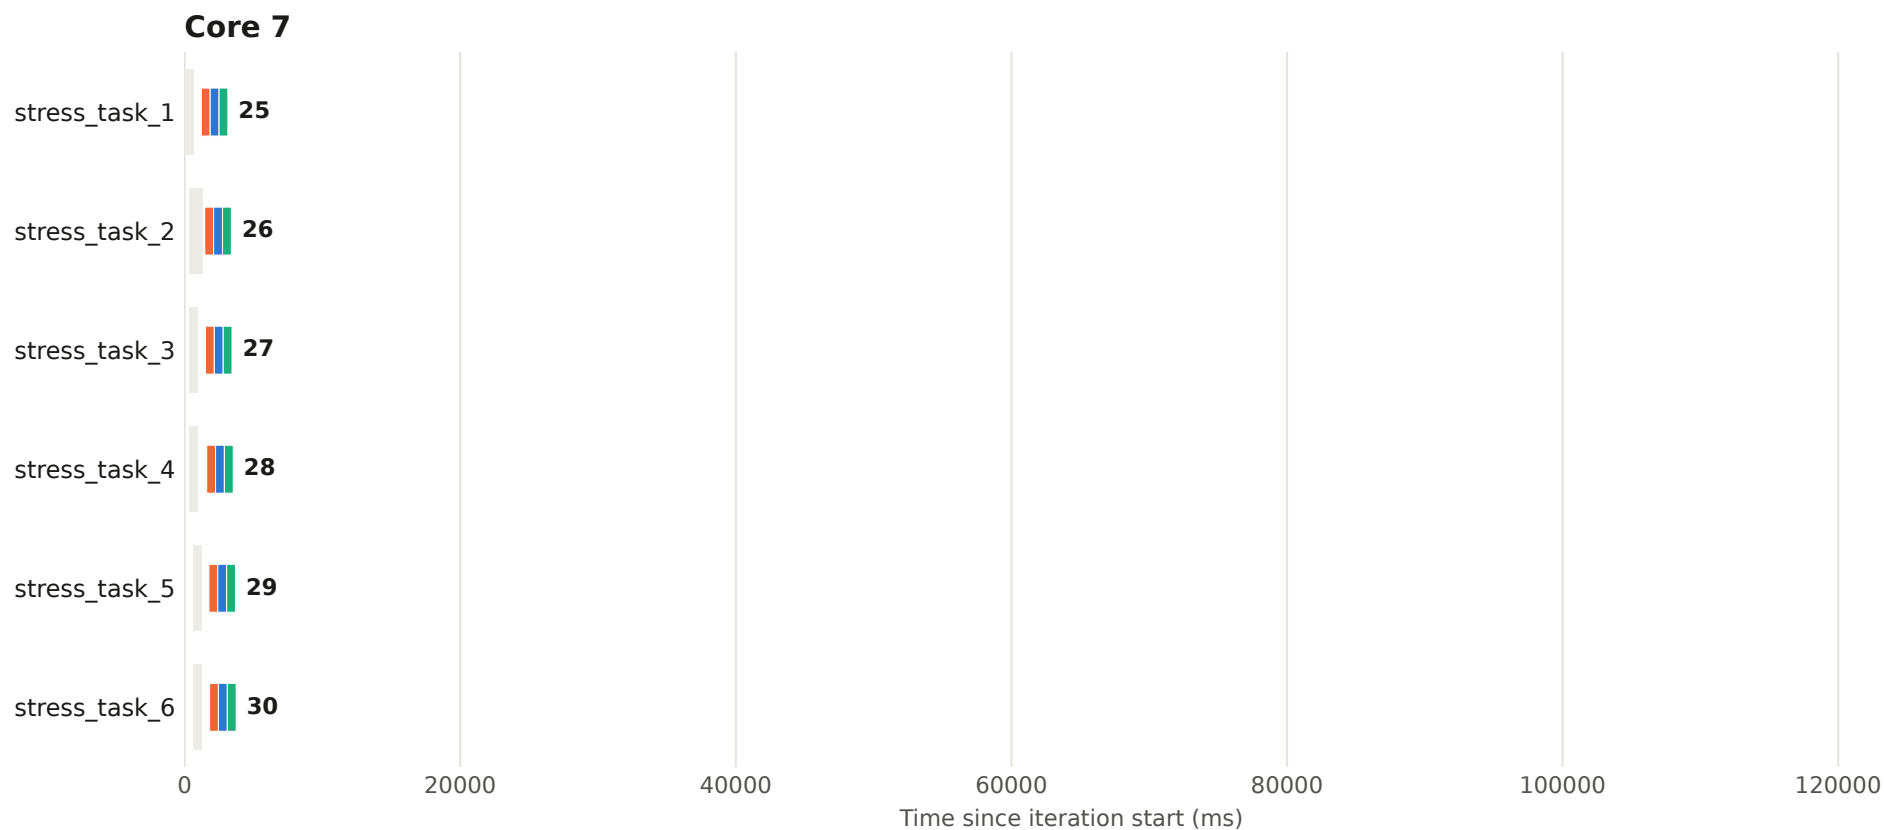


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 98 - core 3

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

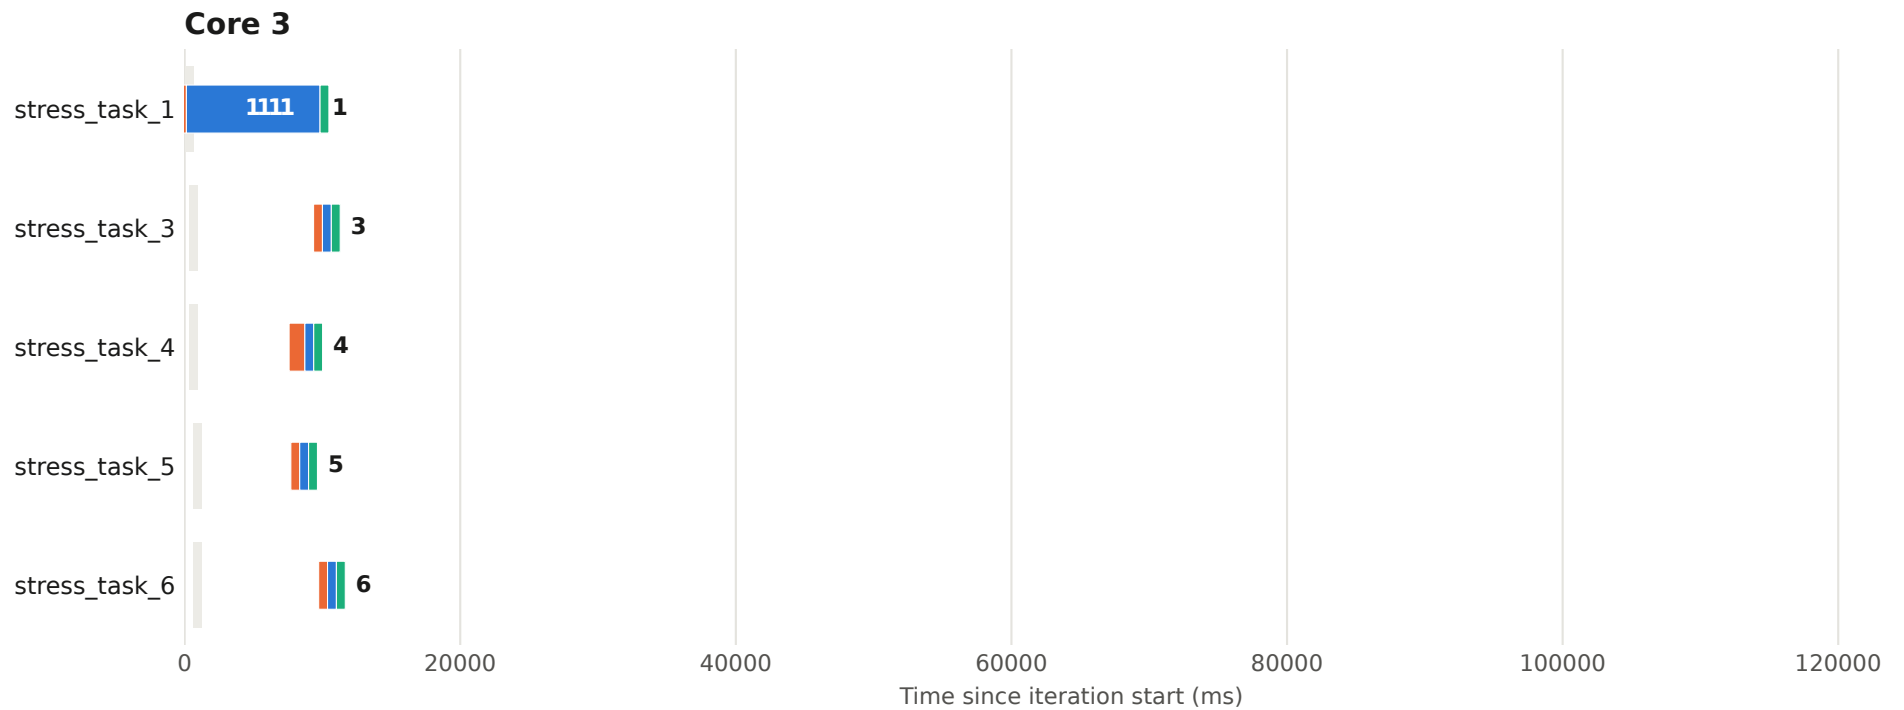


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 98 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

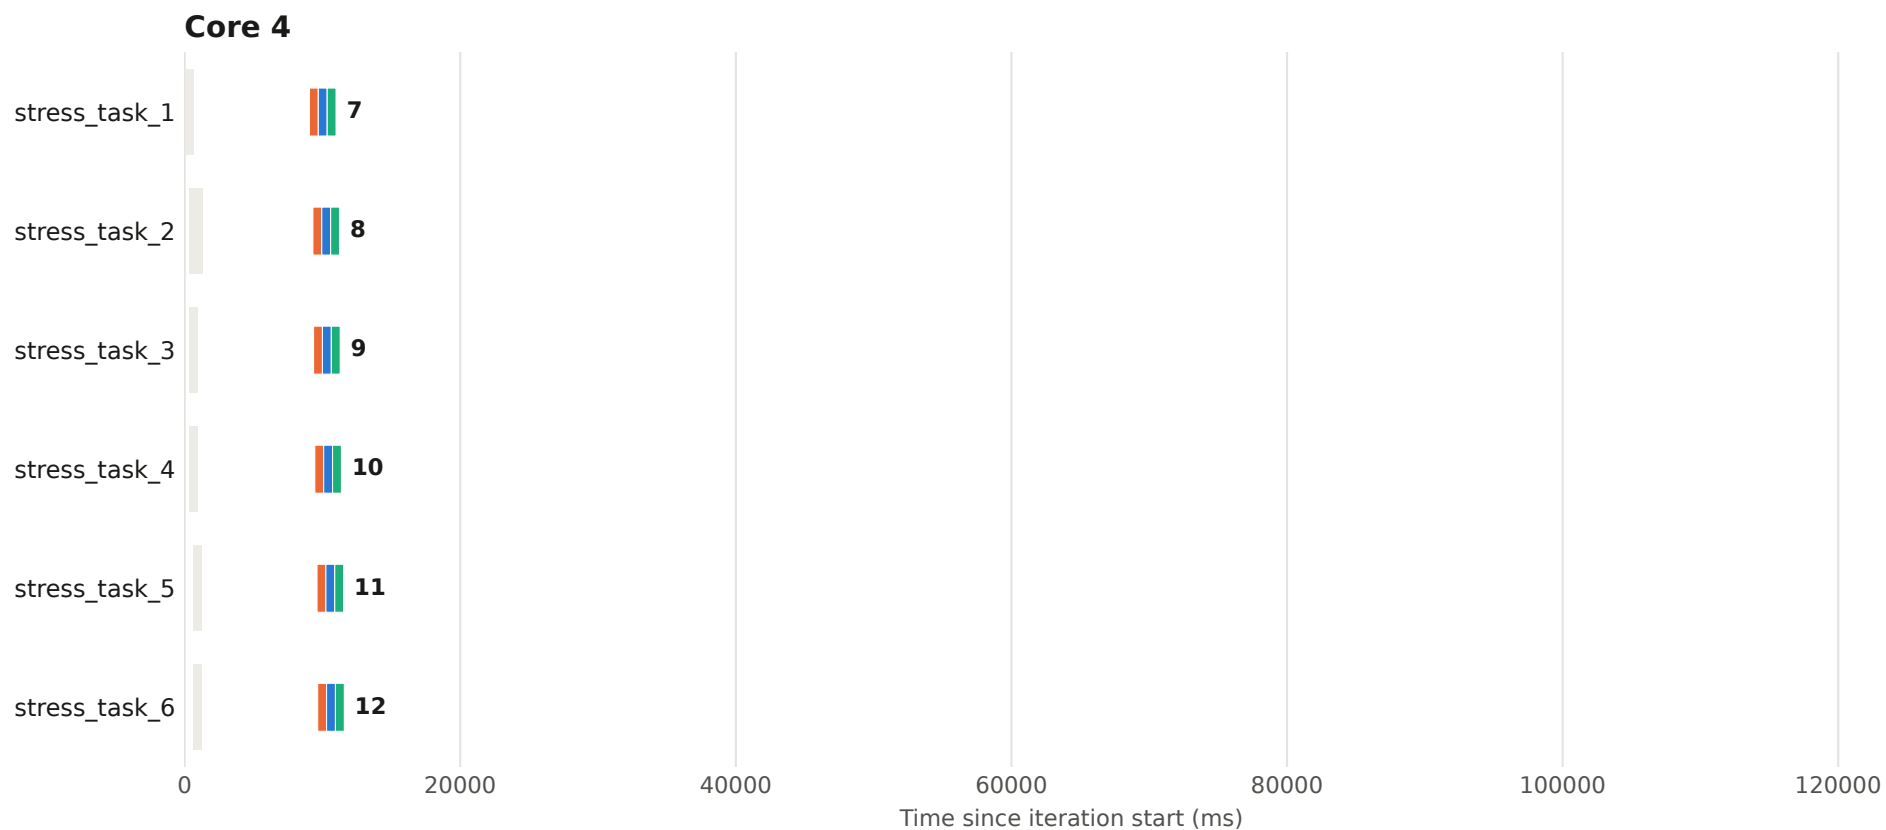


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 98 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

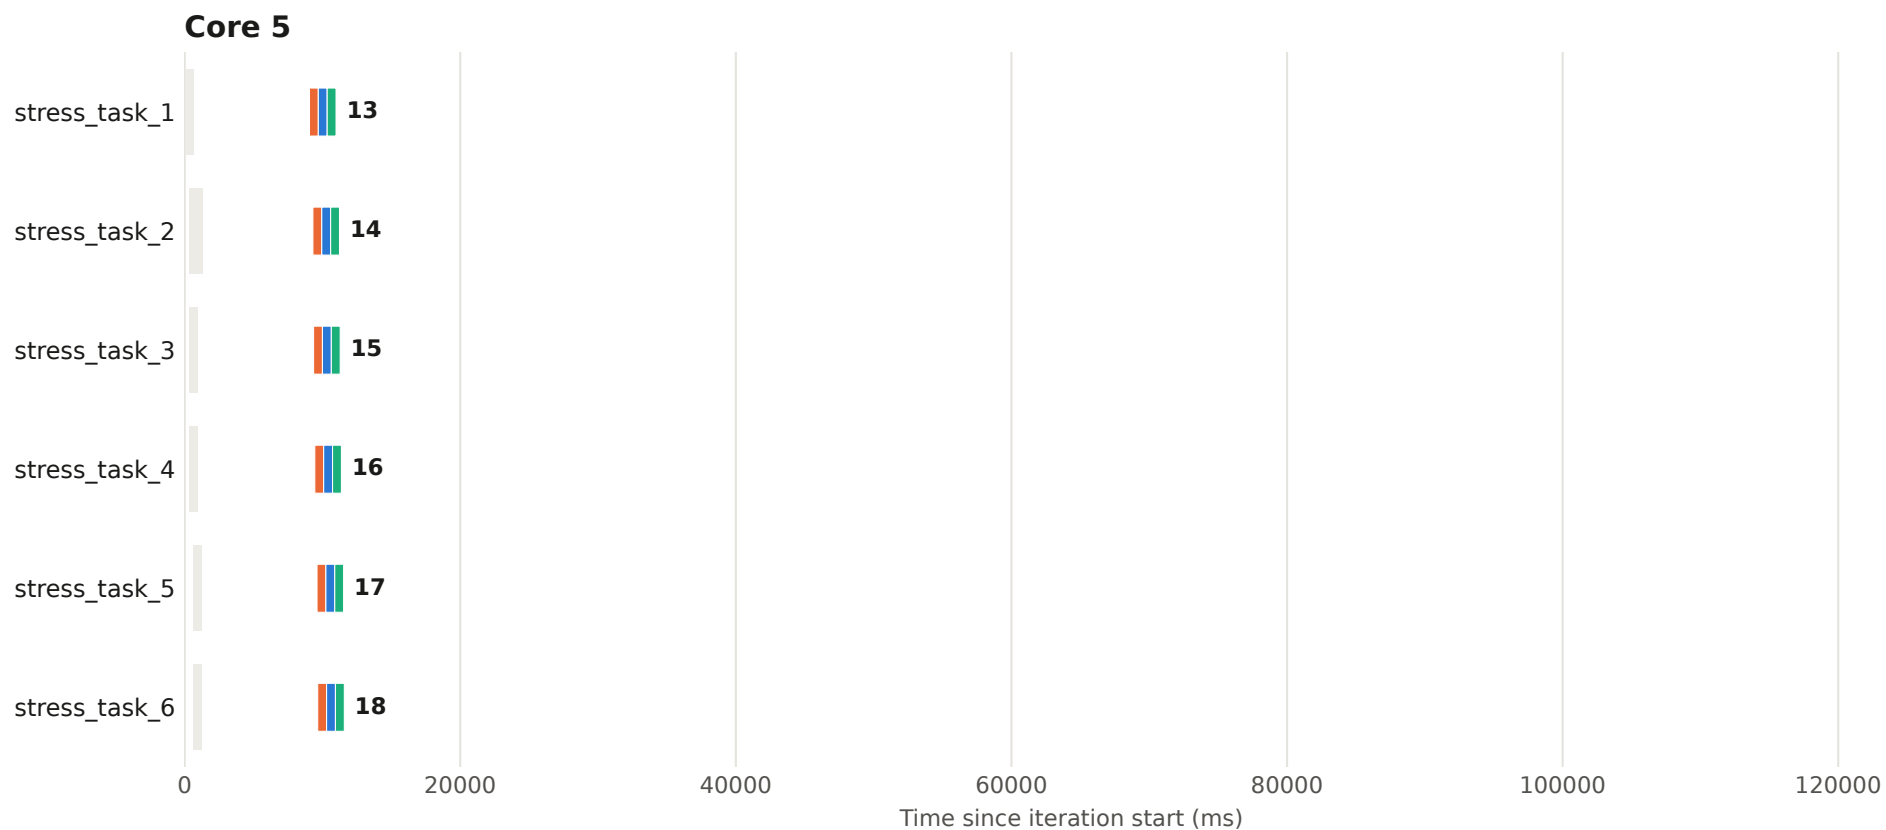


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 98 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

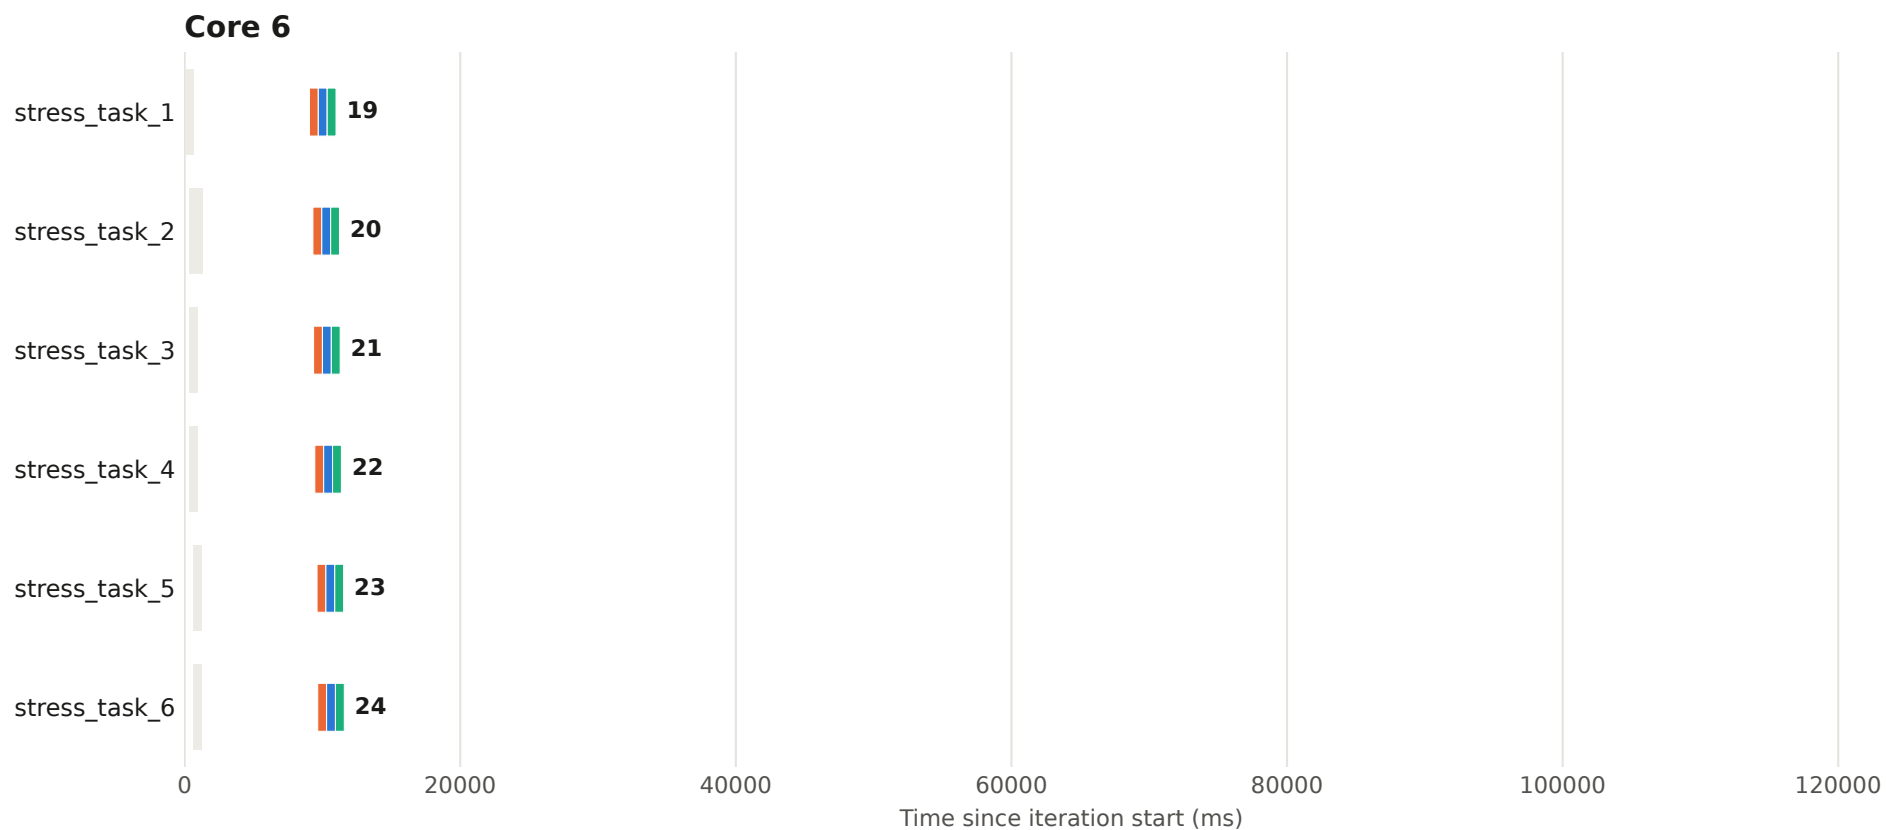


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 98 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

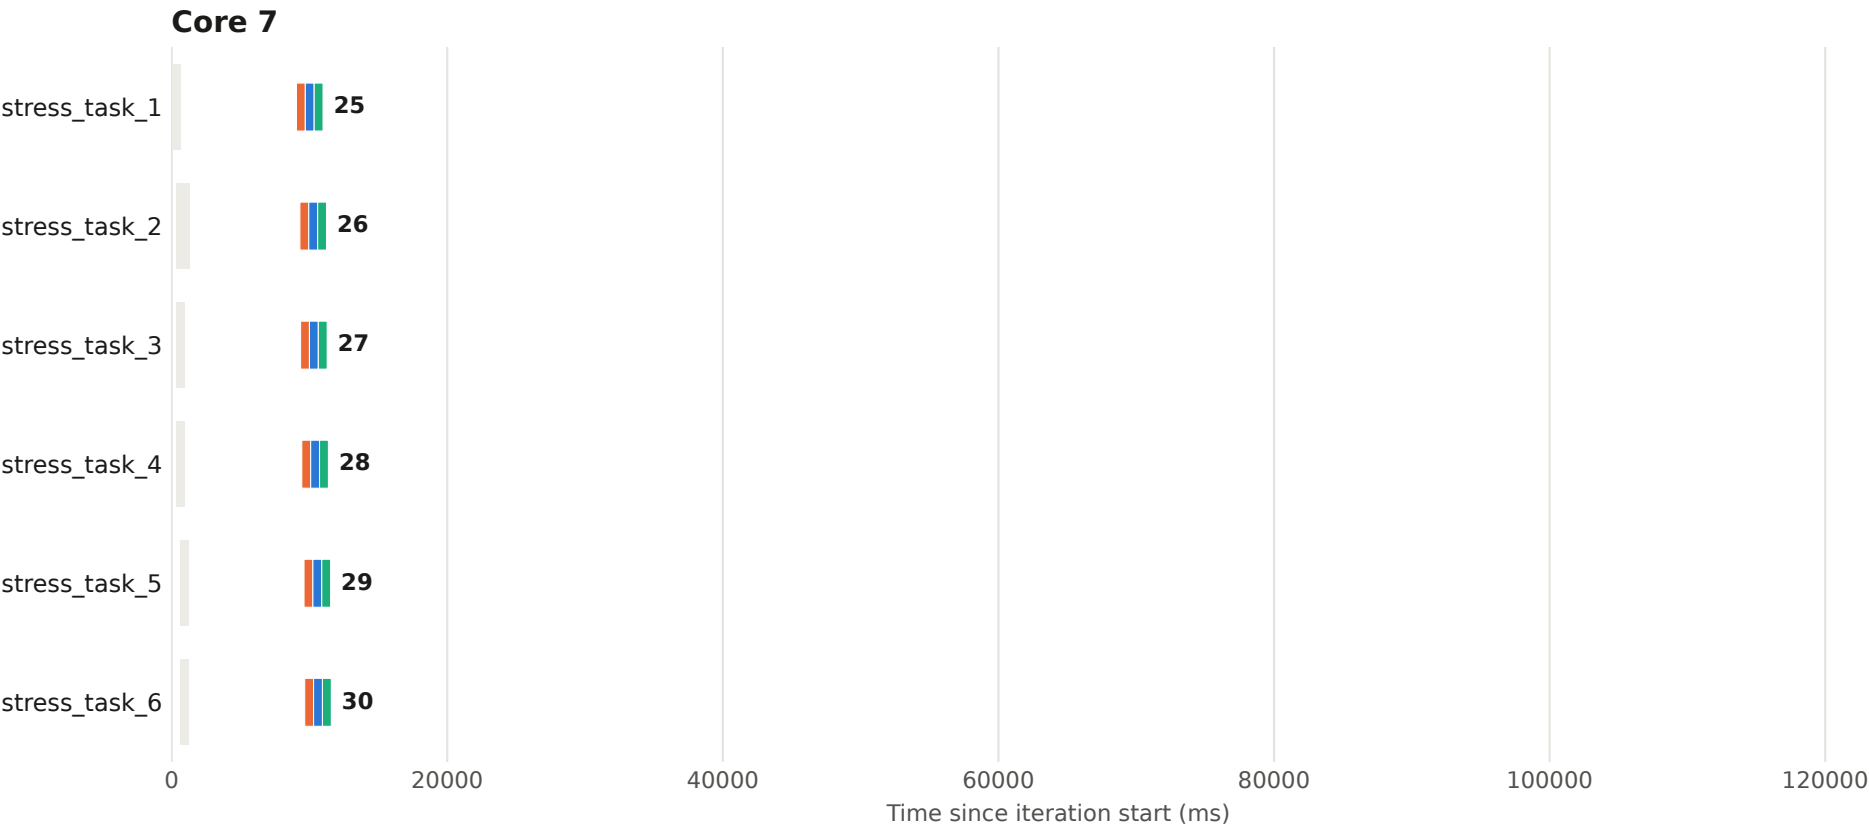


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 99 - core 3

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

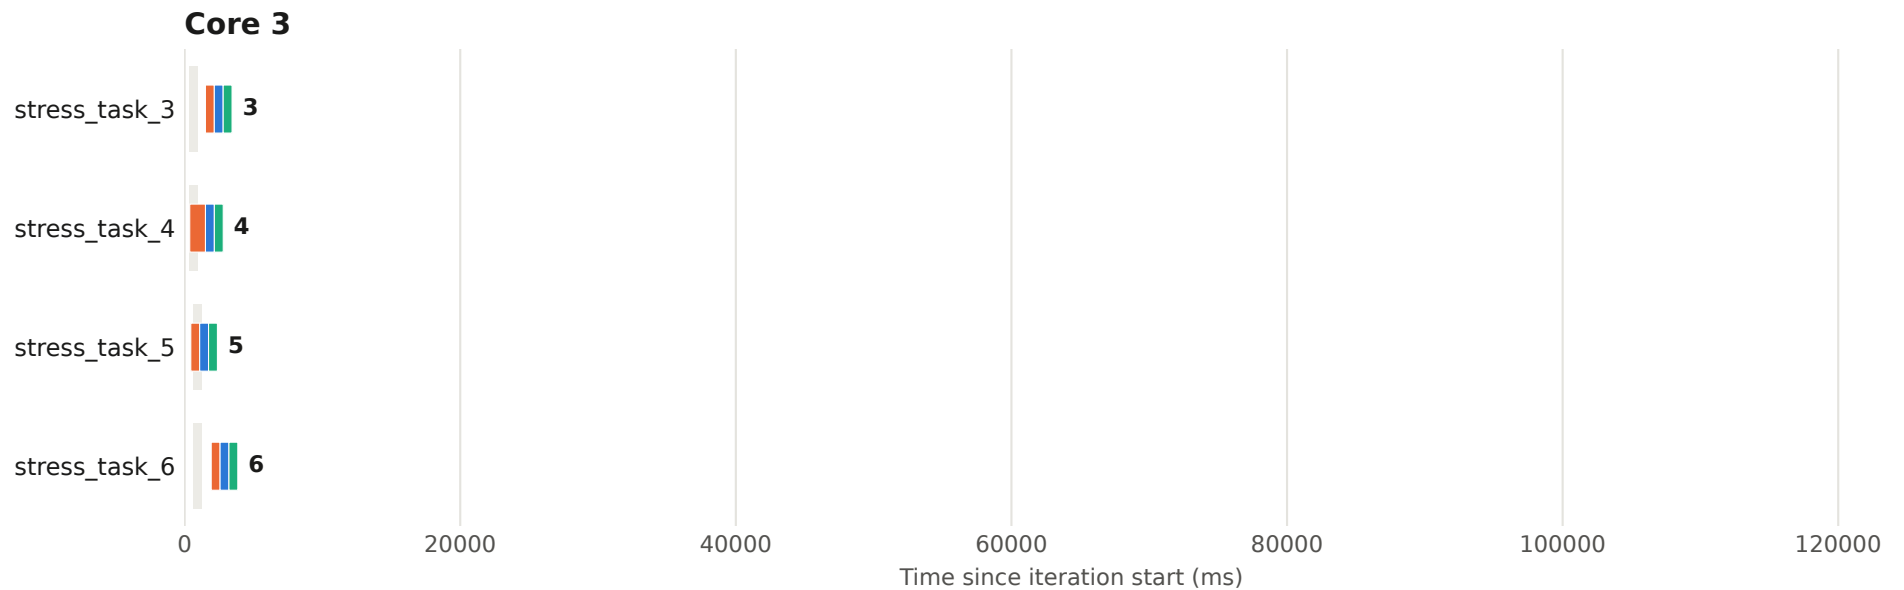

Execution plan - iteration 99 - core 4

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

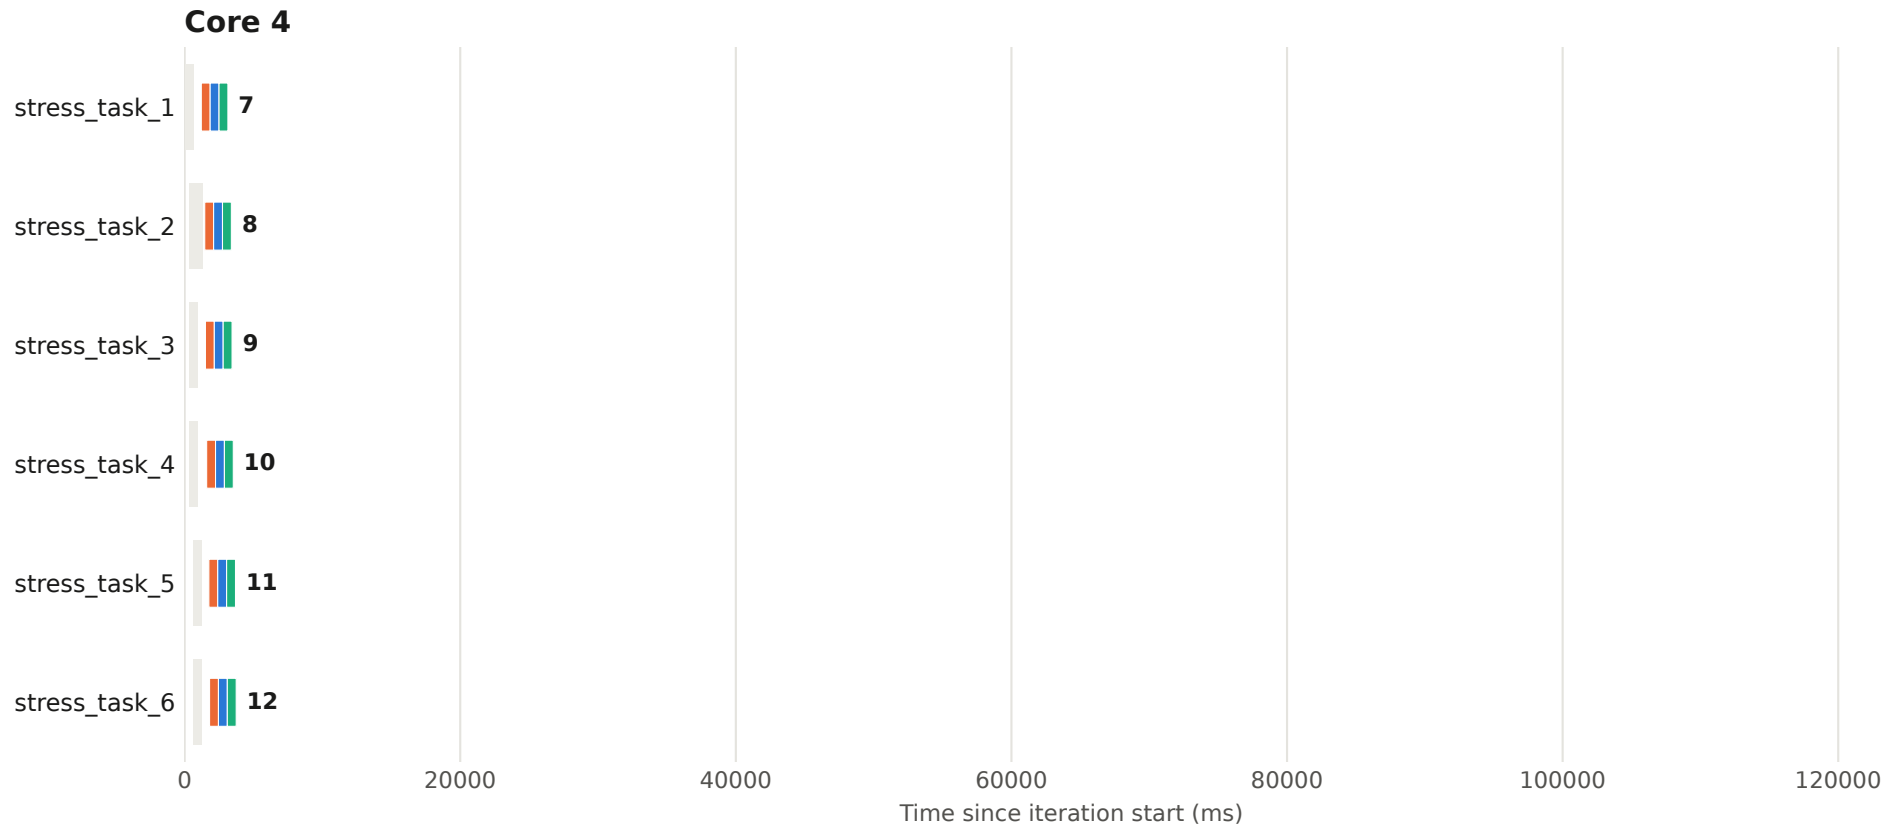


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 99 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

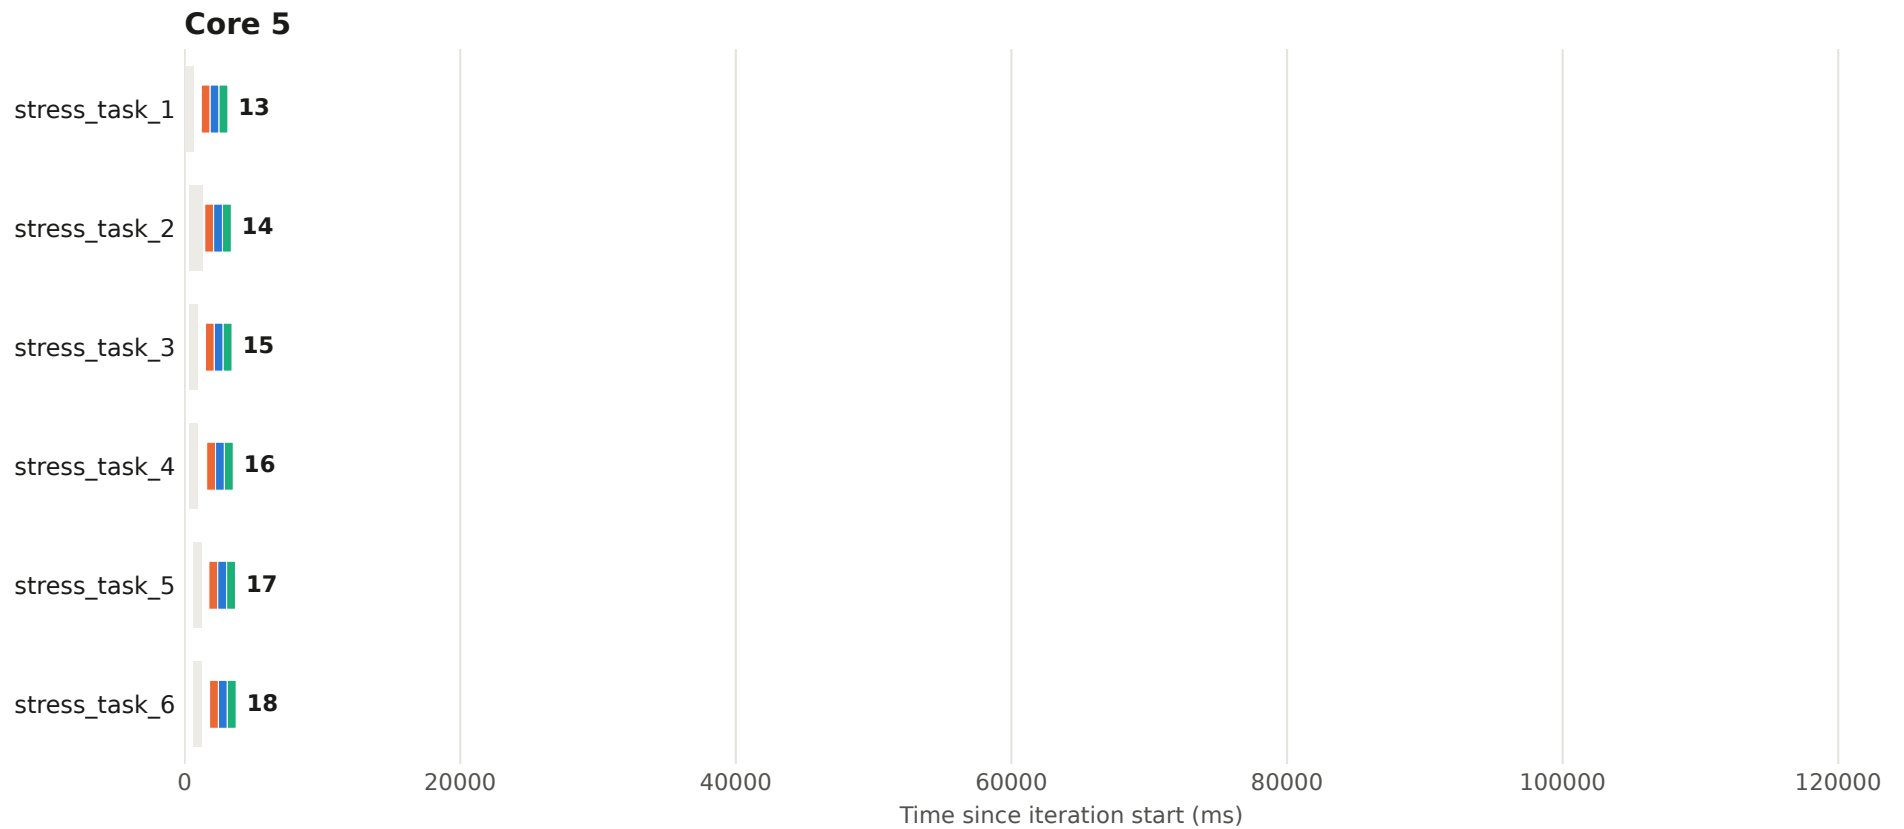


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 99 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

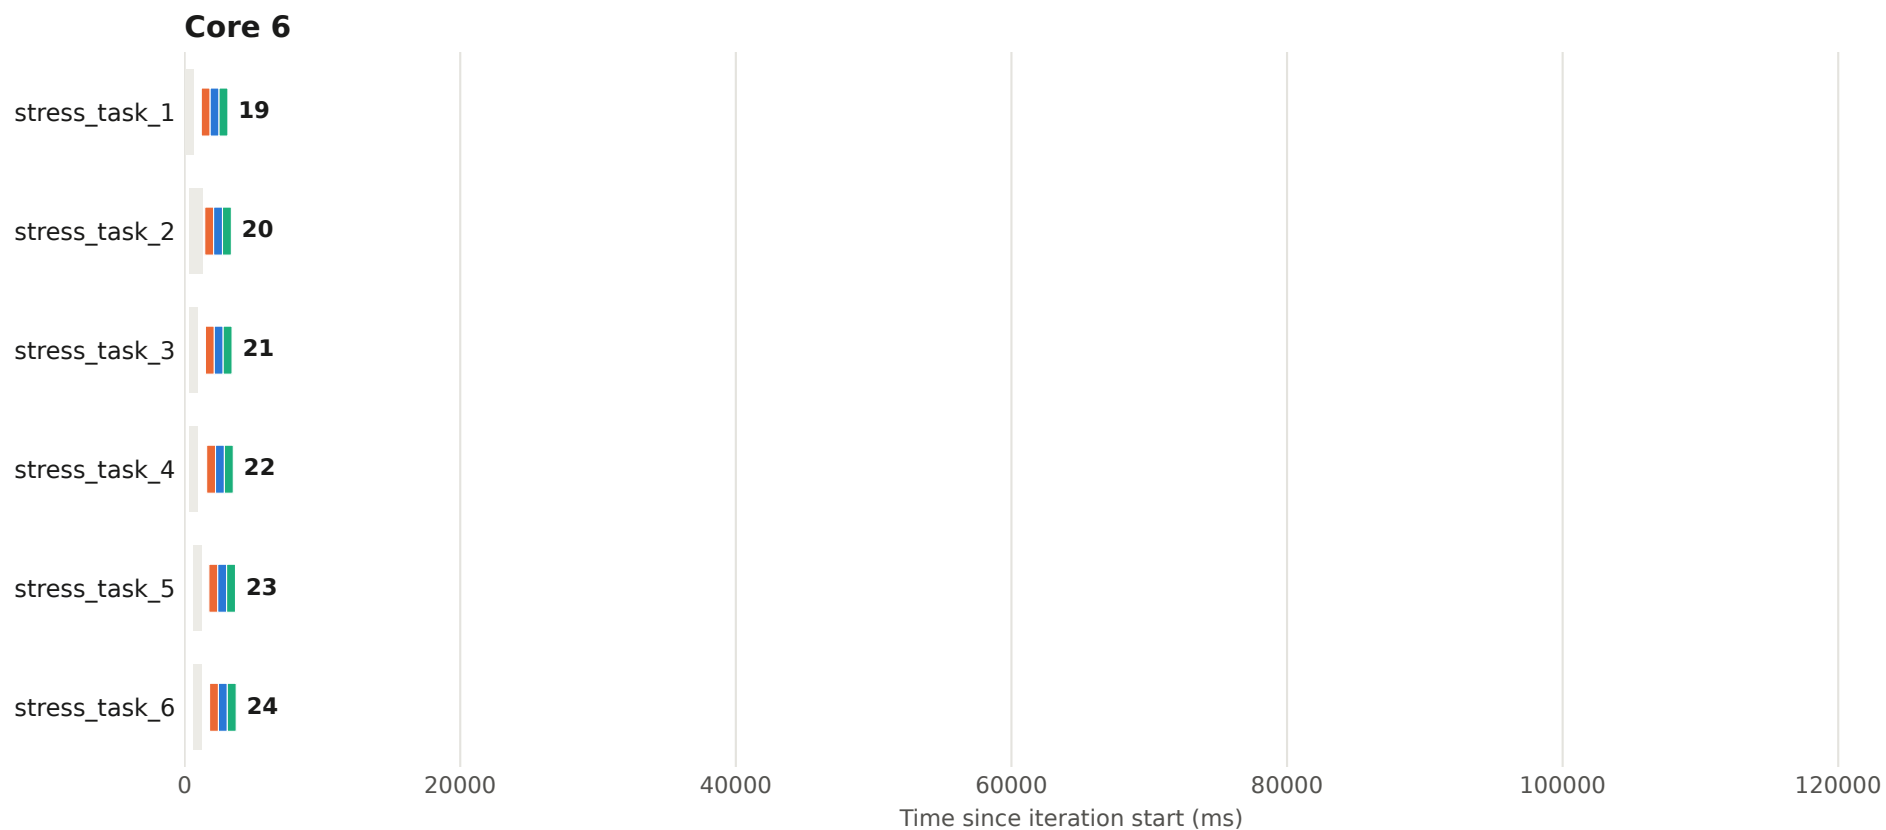


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 99 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

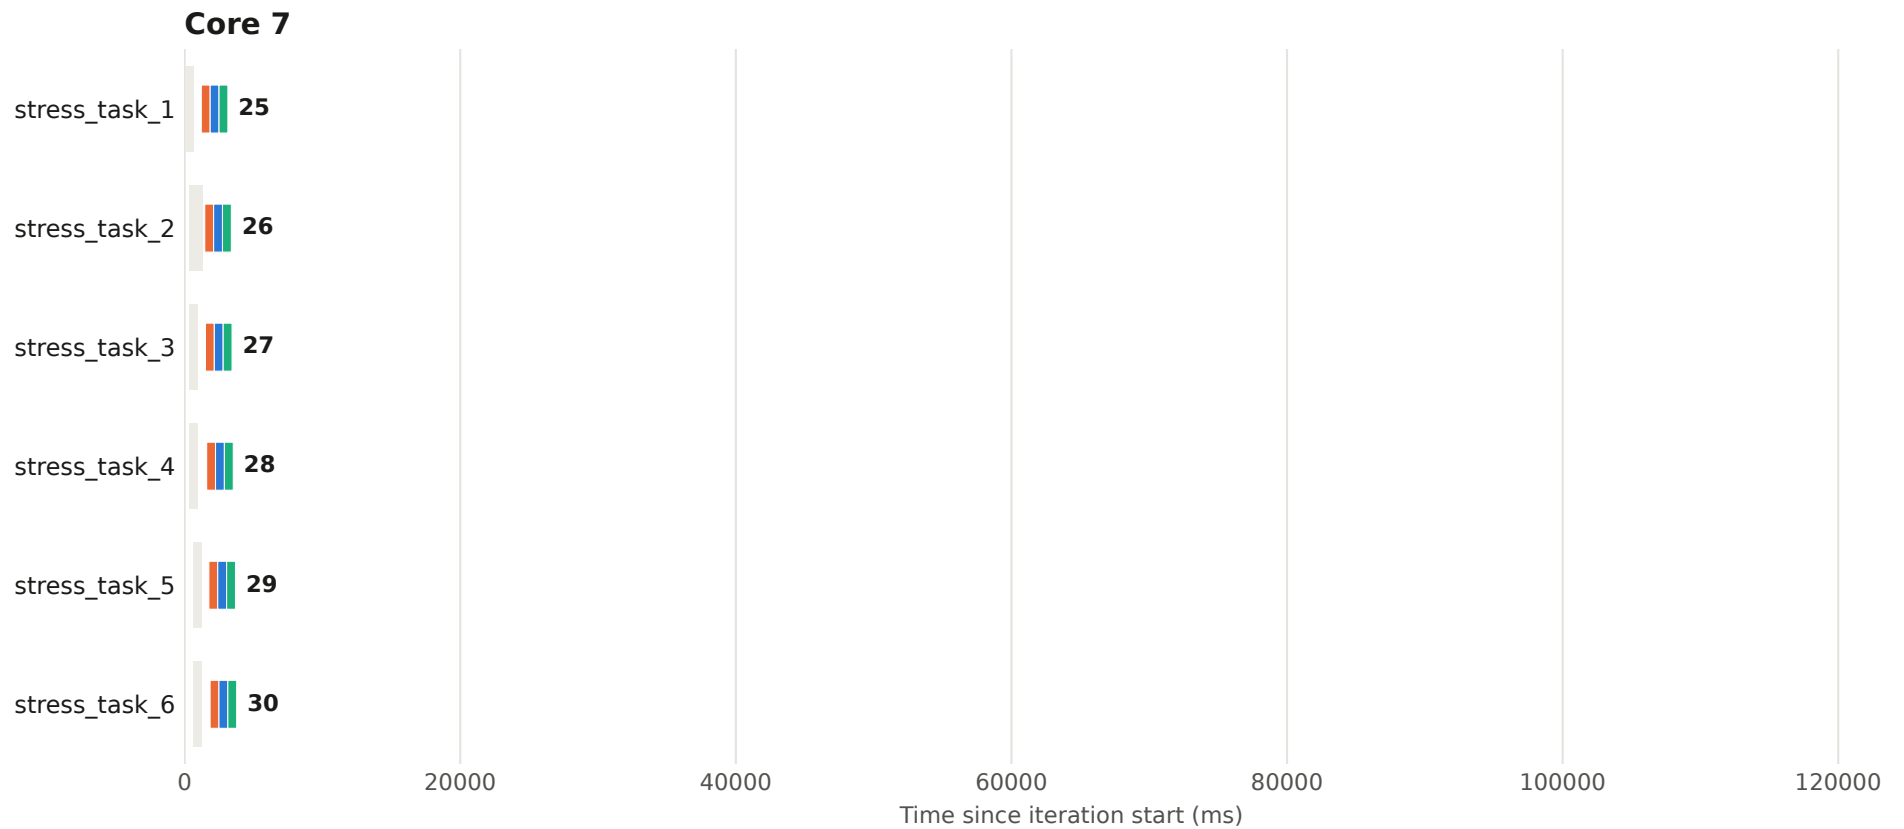

Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.