

# Performance report

choreography-mqueue | test\_quad\_core\_mix\_1

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Generated          | 2026-09-25 00:07:15                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Schedule           | Configurable CPU/IO Benchmark                                                                                                                                                                                                                                                                                                                                                                                                         |
| Iterations in logs | 100 (#0 - #99), manifest declares 100                                                                                                                                                                                                                                                                                                                                                                                                 |
| Tasks              | 1=stress_task_1, 2=stress_task_2, 3=stress_task_3, 4=stress_task_4, 5=stress_task_5, 6=stress_task_6, 7=stress_task_1, 8=stress_task_2, 9=stress_task_3, 10=stress_task_4, 11=stress_task_5, 12=stress_task_6, 13=stress_task_1, 14=stress_task_2, 15=stress_task_3, 16=stress_task_4, 17=stress_task_5, 18=stress_task_6, 19=stress_task_1, 20=stress_task_2, 21=stress_task_3, 22=stress_task_4, 23=stress_task_5, 24=stress_task_6 |
| Cores used         | 4, 5, 6, 7, 62026, 72026                                                                                                                                                                                                                                                                                                                                                                                                              |
| PERF records       | 2395 (4 malformed skipped)                                                                                                                                                                                                                                                                                                                                                                                                            |
| Log sources        | stress_task_1.log, stress_task_2.log, stress_task_3.log, stress_task_4.log, stress_task_5.log, stress_task_6.log                                                                                                                                                                                                                                                                                                                      |

# Statistics summary

All values in milliseconds | samples per task: 98-100 iteration(s) | tasks 1-6

| Task ID | Image name    | Metric     | Mean    | Std Dev | Min     | Max     | Median  | p99     |
|---------|---------------|------------|---------|---------|---------|---------|---------|---------|
| 1       | stress_task_1 | q_em_tw_ms | 0.178   | 0.037   | 0.136   | 0.528   | 0.172   | 0.216   |
|         |               | t_in_tw_ms | 88.185  | 0.618   | 87.014  | 89.976  | 88.496  | 88.677  |
|         |               | q_tw_em_ms | 0.005   | 0.002   | 0.003   | 0.022   | 0.004   | 0.016   |
|         |               | total_ms   | 88.367  | 0.627   | 87.190  | 90.509  | 88.668  | 88.858  |
| 2       | stress_task_2 | q_em_tw_ms | 0.175   | 0.039   | 0.122   | 0.518   | 0.170   | 0.239   |
|         |               | t_in_tw_ms | 265.882 | 0.584   | 264.210 | 268.521 | 265.976 | 266.794 |
|         |               | q_tw_em_ms | 0.005   | 0.004   | 0.004   | 0.039   | 0.004   | 0.017   |
|         |               | total_ms   | 266.063 | 0.600   | 264.376 | 269.044 | 266.160 | 266.964 |
| 3       | stress_task_3 | q_em_tw_ms | 0.154   | 0.035   | 0.098   | 0.484   | 0.152   | 0.180   |
|         |               | t_in_tw_ms | 88.722  | 0.278   | 87.608  | 90.287  | 88.785  | 89.009  |
|         |               | q_tw_em_ms | 0.004   | 0.000   | 0.004   | 0.006   | 0.004   | 0.005   |
|         |               | total_ms   | 88.880  | 0.297   | 87.773  | 90.775  | 88.940  | 89.176  |
| 4       | stress_task_4 | q_em_tw_ms | 68.830  | 0.481   | 67.633  | 70.704  | 68.802  | 69.636  |
|         |               | t_in_tw_ms | 88.559  | 0.301   | 87.274  | 88.817  | 88.694  | 88.814  |
|         |               | q_tw_em_ms | 0.004   | 0.000   | 0.003   | 0.004   | 0.004   | 0.004   |
|         |               | total_ms   | 157.393 | 0.566   | 155.976 | 159.245 | 157.454 | 158.366 |
| 5       | stress_task_5 | q_em_tw_ms | 0.170   | 0.037   | 0.120   | 0.510   | 0.167   | 0.209   |
|         |               | t_in_tw_ms | 141.448 | 43.940  | 87.820  | 180.556 | 177.416 | 178.591 |
|         |               | q_tw_em_ms | 0.006   | 0.004   | 0.004   | 0.024   | 0.005   | 0.017   |
|         |               | total_ms   | 141.624 | 43.943  | 87.988  | 181.072 | 177.583 | 178.763 |
| 6       | stress_task_6 | q_em_tw_ms | 0.173   | 0.057   | 0.106   | 0.635   | 0.158   | 0.259   |
|         |               | t_in_tw_ms | 105.799 | 19.494  | 87.675  | 132.162 | 89.249  | 129.180 |
|         |               | q_tw_em_ms | 0.004   | 0.002   | 0.003   | 0.018   | 0.004   | 0.012   |
|         |               | total_ms   | 105.976 | 19.477  | 87.836  | 132.313 | 89.449  | 129.398 |

# Statistics summary

All values in milliseconds | samples per task: 98-100 iteration(s) | tasks 7-12

| Task ID | Image name    | Metric     | Mean    | Std Dev | Min     | Max     | Median  | p99     |
|---------|---------------|------------|---------|---------|---------|---------|---------|---------|
| 7       | stress_task_1 | q_em_tw_ms | 0.029   | 0.014   | 0.023   | 0.153   | 0.026   | 0.065   |
|         |               | t_in_tw_ms | 88.295  | 0.462   | 86.989  | 89.455  | 88.505  | 88.661  |
|         |               | q_tw_em_ms | 0.005   | 0.003   | 0.003   | 0.019   | 0.004   | 0.018   |
|         |               | total_ms   | 88.329  | 0.465   | 87.024  | 89.625  | 88.543  | 88.694  |
| 8       | stress_task_2 | q_em_tw_ms | 0.042   | 0.012   | 0.033   | 0.154   | 0.039   | 0.065   |
|         |               | t_in_tw_ms | 265.724 | 0.468   | 264.711 | 268.091 | 265.757 | 266.444 |
|         |               | q_tw_em_ms | 0.005   | 0.002   | 0.004   | 0.015   | 0.004   | 0.015   |
|         |               | total_ms   | 265.770 | 0.474   | 264.749 | 268.249 | 265.800 | 266.488 |
| 9       | stress_task_3 | q_em_tw_ms | 0.033   | 0.012   | 0.028   | 0.148   | 0.032   | 0.043   |
|         |               | t_in_tw_ms | 88.570  | 0.210   | 88.041  | 89.804  | 88.612  | 88.797  |
|         |               | q_tw_em_ms | 0.004   | 0.001   | 0.003   | 0.009   | 0.004   | 0.008   |
|         |               | total_ms   | 88.608  | 0.216   | 88.076  | 89.956  | 88.650  | 88.833  |
| 10      | stress_task_4 | q_em_tw_ms | 68.555  | 0.462   | 67.523  | 69.893  | 68.534  | 69.290  |
|         |               | t_in_tw_ms | 88.582  | 0.282   | 87.297  | 89.133  | 88.710  | 88.841  |
|         |               | q_tw_em_ms | 0.004   | 0.000   | 0.003   | 0.005   | 0.004   | 0.004   |
|         |               | total_ms   | 157.141 | 0.580   | 155.726 | 159.029 | 157.218 | 158.003 |
| 11      | stress_task_5 | q_em_tw_ms | 0.027   | 0.011   | 0.023   | 0.135   | 0.025   | 0.039   |
|         |               | t_in_tw_ms | 169.208 | 25.465  | 88.276  | 177.747 | 177.226 | 177.740 |
|         |               | q_tw_em_ms | 0.005   | 0.002   | 0.003   | 0.016   | 0.004   | 0.014   |
|         |               | total_ms   | 169.239 | 25.461  | 88.310  | 177.775 | 177.255 | 177.770 |
| 12      | stress_task_6 | q_em_tw_ms | 0.419   | 3.872   | 0.028   | 38.752  | 0.030   | 0.530   |
|         |               | t_in_tw_ms | 93.666  | 13.195  | 87.303  | 128.624 | 88.727  | 128.306 |
|         |               | q_tw_em_ms | 0.005   | 0.003   | 0.003   | 0.022   | 0.004   | 0.018   |
|         |               | total_ms   | 94.090  | 13.614  | 87.339  | 128.772 | 88.762  | 128.341 |

# Statistics summary

All values in milliseconds | samples per task: 98-100 iteration(s) | tasks 13-18

| Task ID | Image name    | Metric     | Mean    | Std Dev | Min     | Max     | Median  | p99     |
|---------|---------------|------------|---------|---------|---------|---------|---------|---------|
| 13      | stress_task_1 | q_em_tw_ms | 0.041   | 0.012   | 0.027   | 0.148   | 0.040   | 0.058   |
|         |               | t_in_tw_ms | 87.925  | 0.440   | 86.573  | 89.495  | 88.059  | 88.240  |
|         |               | q_tw_em_ms | 0.006   | 0.004   | 0.003   | 0.021   | 0.005   | 0.018   |
|         |               | total_ms   | 87.972  | 0.444   | 86.616  | 89.647  | 88.104  | 88.298  |
| 14      | stress_task_2 | q_em_tw_ms | 0.030   | 0.012   | 0.026   | 0.144   | 0.027   | 0.048   |
|         |               | t_in_tw_ms | 264.427 | 0.508   | 262.360 | 266.527 | 264.526 | 265.104 |
|         |               | q_tw_em_ms | 0.005   | 0.003   | 0.004   | 0.026   | 0.005   | 0.020   |
|         |               | total_ms   | 264.462 | 0.513   | 262.395 | 266.676 | 264.558 | 265.148 |
| 15      | stress_task_3 | q_em_tw_ms | 0.028   | 0.012   | 0.025   | 0.144   | 0.027   | 0.037   |
|         |               | t_in_tw_ms | 88.121  | 0.307   | 86.734  | 89.357  | 88.213  | 88.349  |
|         |               | q_tw_em_ms | 0.006   | 0.004   | 0.003   | 0.028   | 0.005   | 0.025   |
|         |               | total_ms   | 88.155  | 0.312   | 86.765  | 89.506  | 88.245  | 88.381  |
| 16      | stress_task_4 | q_em_tw_ms | 68.111  | 0.488   | 66.587  | 69.454  | 68.094  | 68.964  |
|         |               | t_in_tw_ms | 88.191  | 0.240   | 87.701  | 88.886  | 88.287  | 88.440  |
|         |               | q_tw_em_ms | 0.006   | 0.006   | 0.003   | 0.037   | 0.004   | 0.036   |
|         |               | total_ms   | 156.307 | 0.561   | 154.765 | 158.345 | 156.272 | 157.357 |
| 17      | stress_task_5 | q_em_tw_ms | 0.038   | 0.012   | 0.030   | 0.152   | 0.036   | 0.047   |
|         |               | t_in_tw_ms | 158.701 | 35.515  | 86.947  | 185.164 | 176.240 | 177.229 |
|         |               | q_tw_em_ms | 0.005   | 0.003   | 0.003   | 0.028   | 0.004   | 0.018   |
|         |               | total_ms   | 158.744 | 35.513  | 86.993  | 185.207 | 176.280 | 177.270 |
| 18      | stress_task_6 | q_em_tw_ms | 0.415   | 3.856   | 0.026   | 38.590  | 0.027   | 0.524   |
|         |               | t_in_tw_ms | 96.649  | 16.007  | 86.763  | 127.873 | 88.326  | 127.546 |
|         |               | q_tw_em_ms | 0.005   | 0.003   | 0.003   | 0.017   | 0.005   | 0.017   |
|         |               | total_ms   | 97.070  | 16.270  | 86.794  | 127.904 | 88.358  | 127.582 |

# Statistics summary


All values in milliseconds | samples per task: 98-100 iteration(s) | tasks 19-24

| Task ID | Image name    | Metric     | Mean    | Std Dev | Min     | Max     | Median  | p99     |
|---------|---------------|------------|---------|---------|---------|---------|---------|---------|
| 19      | stress_task_1 | q_em_tw_ms | 0.030   | 0.021   | 0.025   | 0.231   | 0.027   | 0.045   |
|         |               | t_in_tw_ms | 87.940  | 0.703   | 86.397  | 93.072  | 88.062  | 89.475  |
|         |               | q_tw_em_ms | 0.006   | 0.004   | 0.004   | 0.026   | 0.004   | 0.020   |
|         |               | total_ms   | 87.976  | 0.707   | 86.432  | 93.103  | 88.096  | 89.708  |
| 20      | stress_task_2 | q_em_tw_ms | 0.030   | 0.016   | 0.025   | 0.181   | 0.027   | 0.045   |
|         |               | t_in_tw_ms | 264.432 | 1.455   | 262.984 | 277.961 | 264.316 | 266.617 |
|         |               | q_tw_em_ms | 0.005   | 0.001   | 0.003   | 0.012   | 0.005   | 0.006   |
|         |               | total_ms   | 264.467 | 1.457   | 263.021 | 277.992 | 264.350 | 266.799 |
| 21      | stress_task_3 | q_em_tw_ms | 0.028   | 0.014   | 0.024   | 0.166   | 0.026   | 0.041   |
|         |               | t_in_tw_ms | 88.099  | 0.536   | 87.624  | 92.481  | 88.187  | 89.654  |
|         |               | q_tw_em_ms | 0.005   | 0.004   | 0.003   | 0.028   | 0.004   | 0.020   |
|         |               | total_ms   | 88.132  | 0.539   | 87.655  | 92.510  | 88.220  | 89.821  |
| 22      | stress_task_4 | q_em_tw_ms | 68.091  | 0.666   | 66.898  | 72.207  | 68.088  | 69.736  |
|         |               | t_in_tw_ms | 88.179  | 0.525   | 86.977  | 92.577  | 88.277  | 88.760  |
|         |               | q_tw_em_ms | 0.005   | 0.003   | 0.003   | 0.018   | 0.004   | 0.018   |
|         |               | total_ms   | 156.275 | 1.050   | 154.630 | 164.787 | 156.161 | 158.499 |
| 23      | stress_task_5 | q_em_tw_ms | 0.031   | 0.034   | 0.025   | 0.370   | 0.027   | 0.039   |
|         |               | t_in_tw_ms | 140.294 | 43.743  | 86.872  | 185.509 | 176.190 | 176.875 |
|         |               | q_tw_em_ms | 0.006   | 0.004   | 0.004   | 0.018   | 0.004   | 0.018   |
|         |               | total_ms   | 140.331 | 43.738  | 86.903  | 185.538 | 176.221 | 176.906 |
| 24      | stress_task_6 | q_em_tw_ms | 0.029   | 0.012   | 0.024   | 0.138   | 0.026   | 0.062   |
|         |               | t_in_tw_ms | 103.264 | 18.893  | 87.030  | 135.638 | 88.357  | 127.858 |
|         |               | q_tw_em_ms | 0.005   | 0.003   | 0.003   | 0.031   | 0.004   | 0.016   |
|         |               | total_ms   | 103.297 | 18.893  | 87.081  | 135.668 | 88.388  | 127.998 |

# Execution plan - iteration 0 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

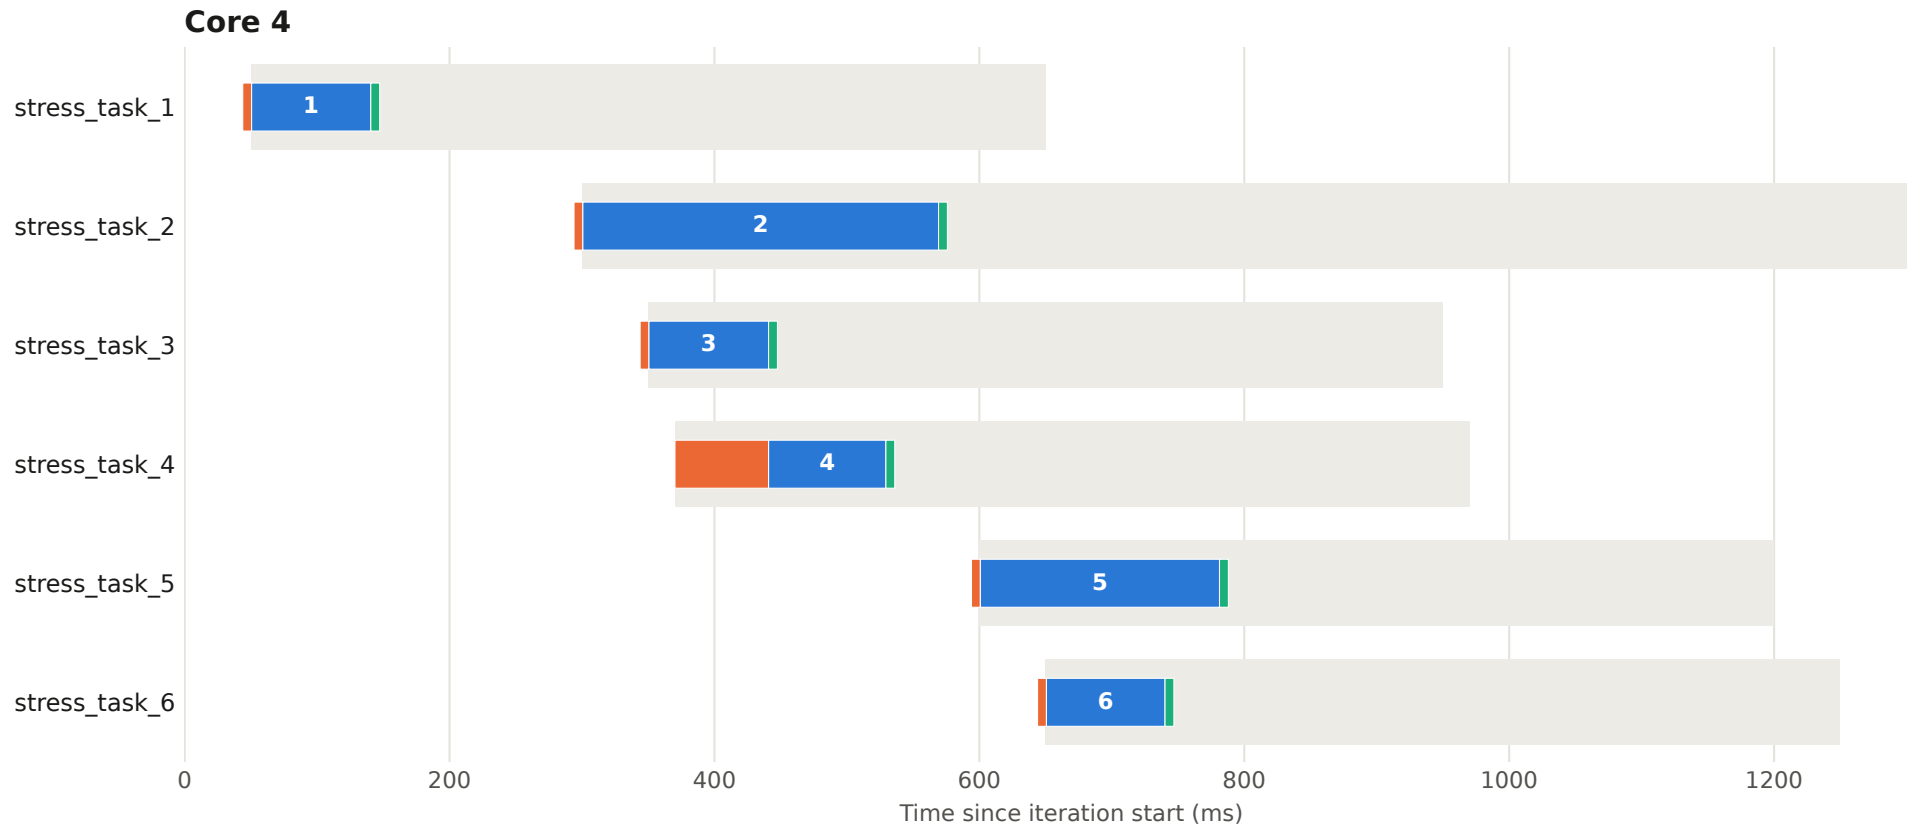


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 0 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

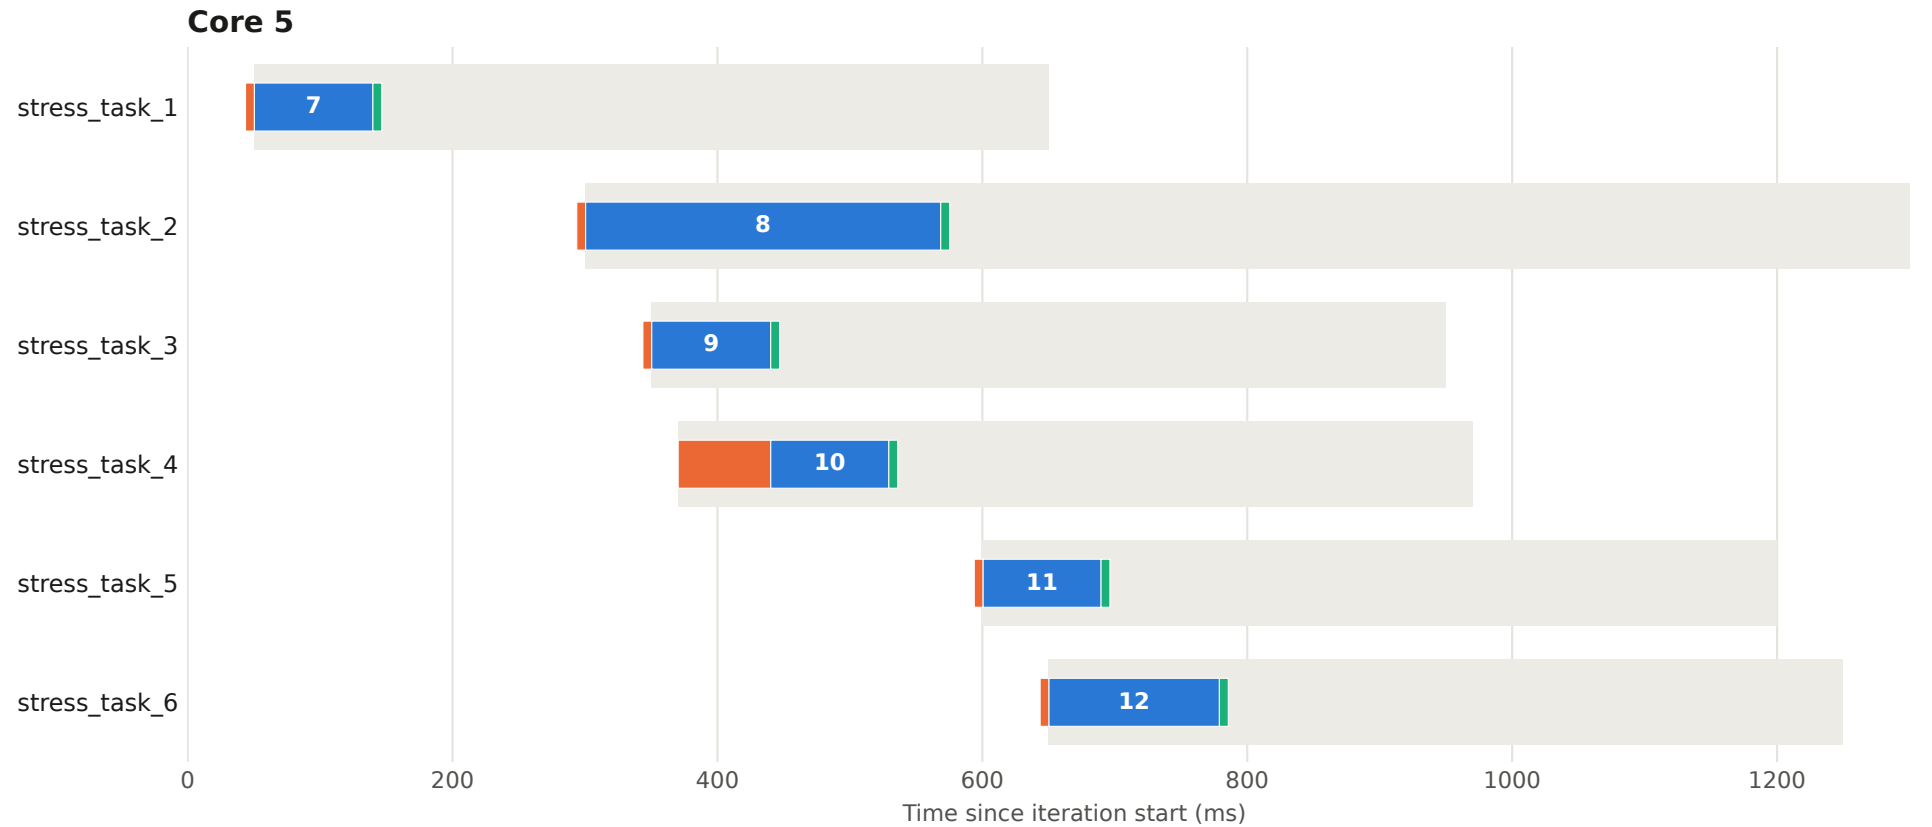


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 0 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

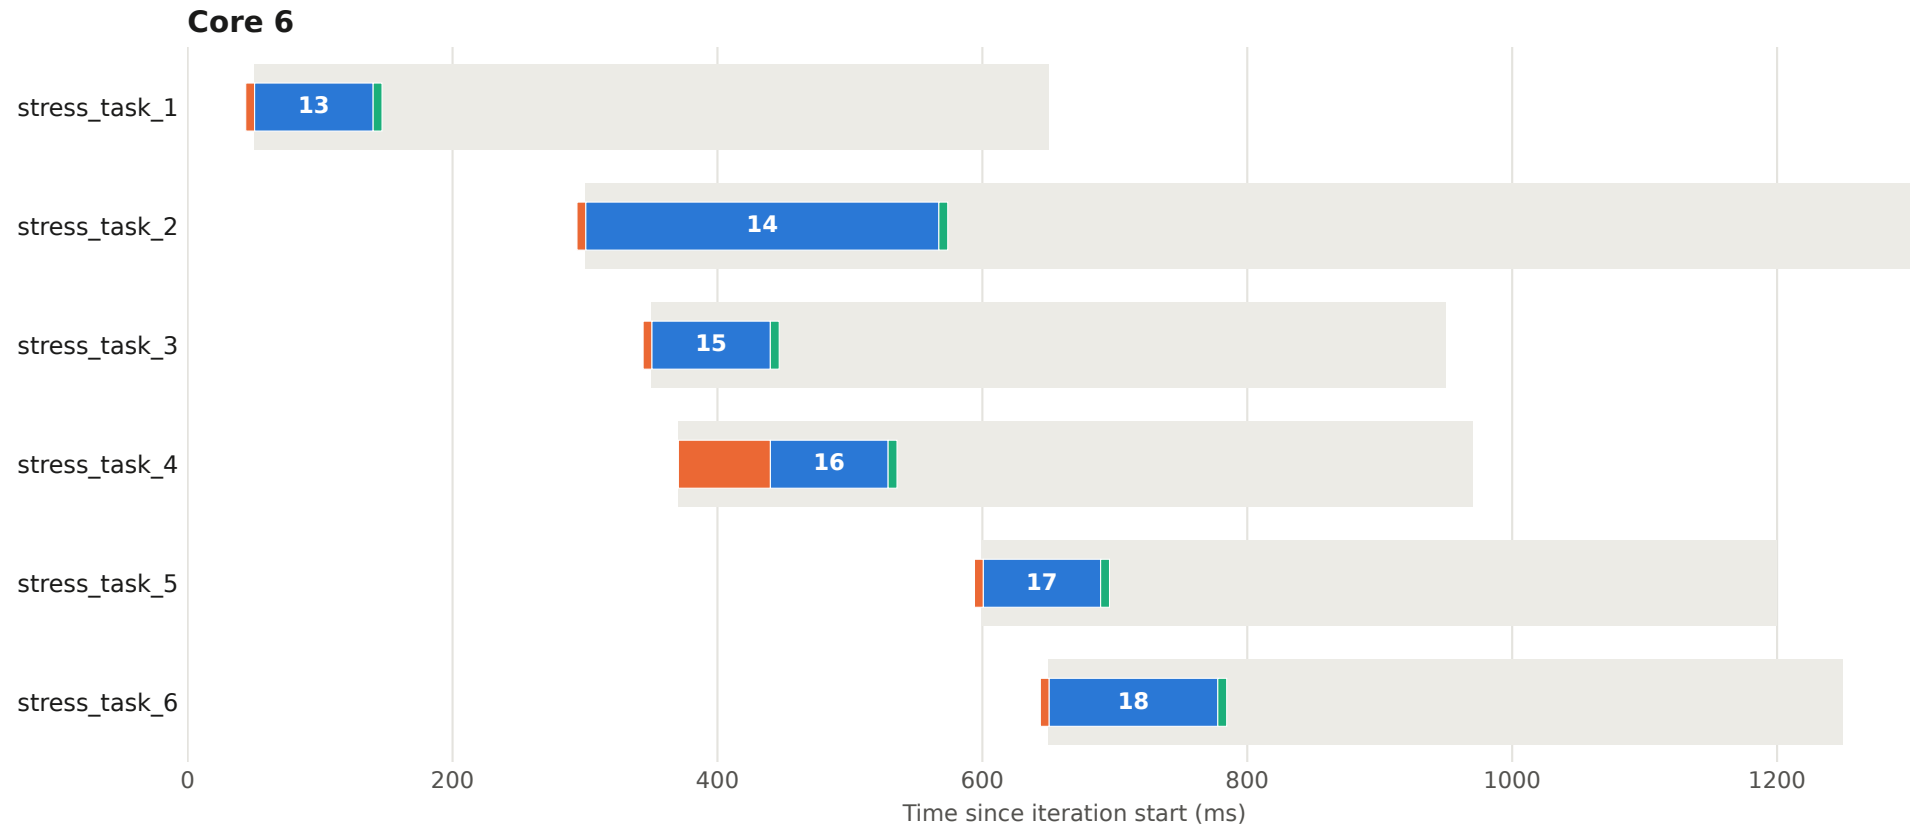


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 0 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

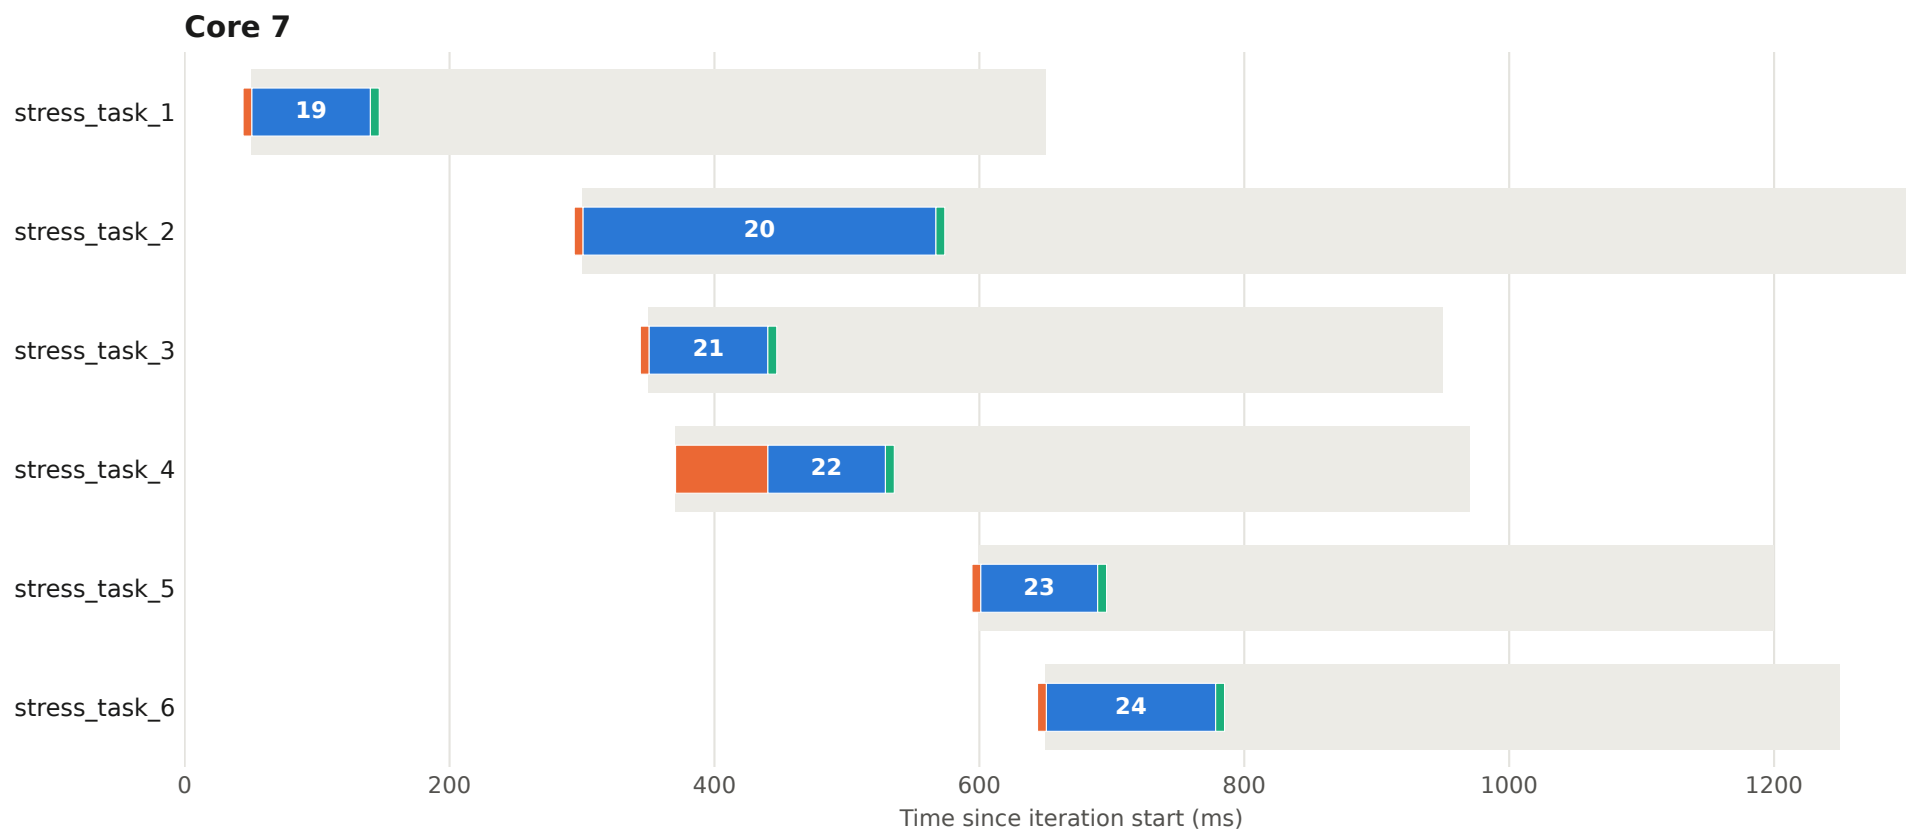


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 1 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

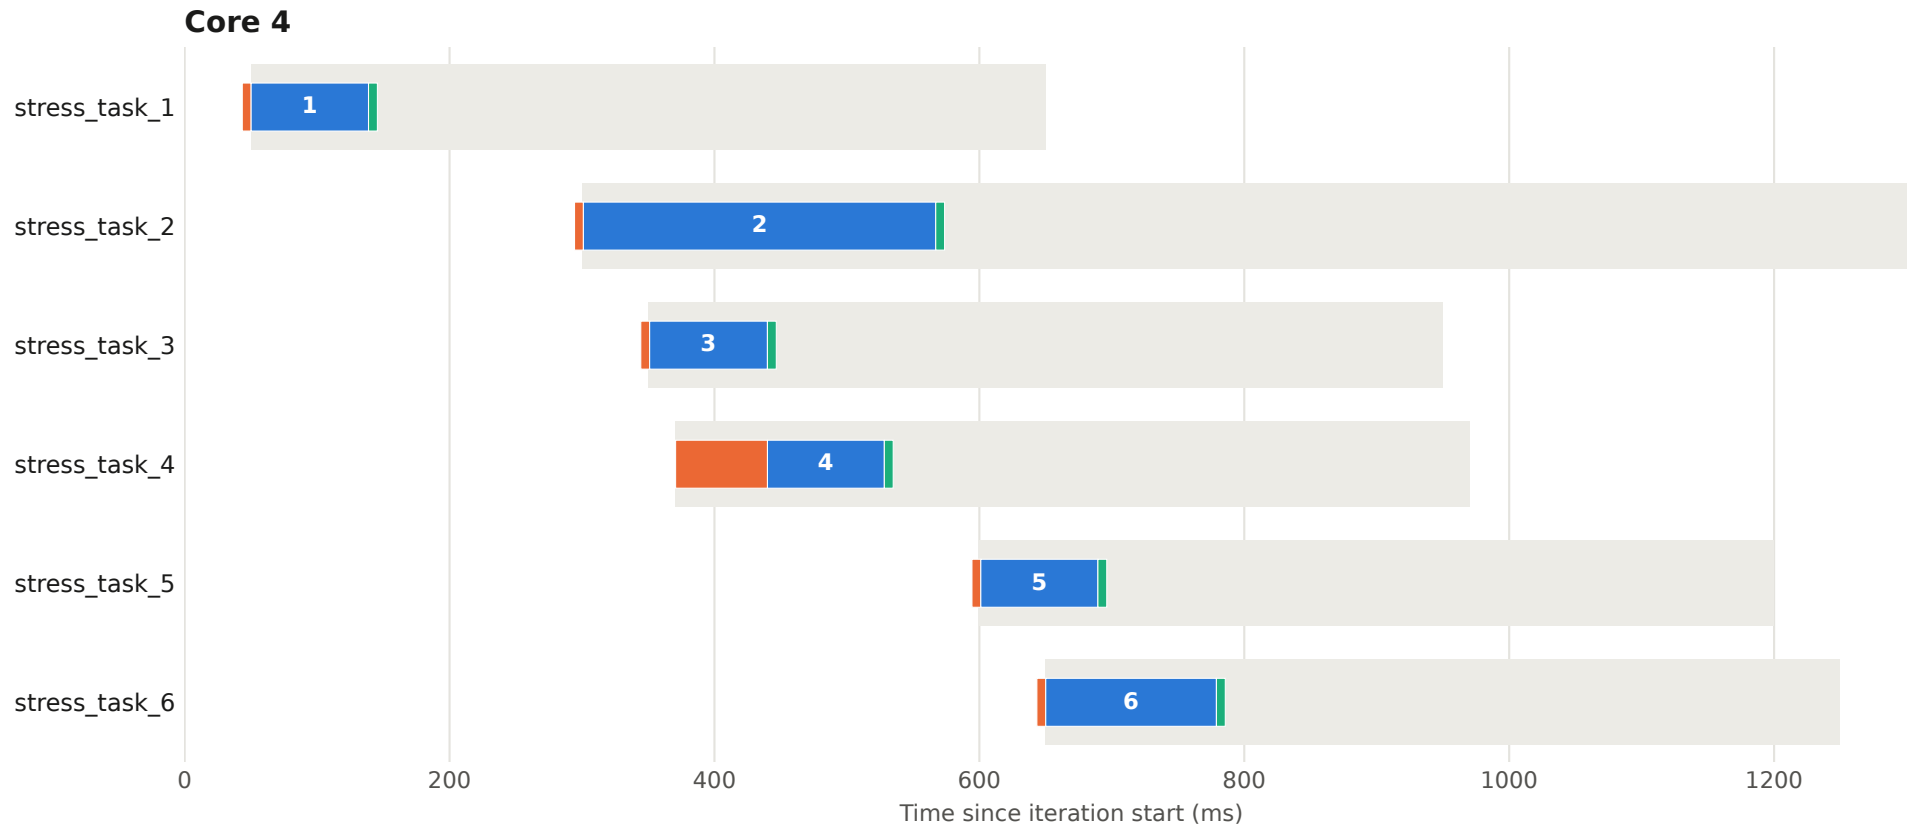


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 1 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

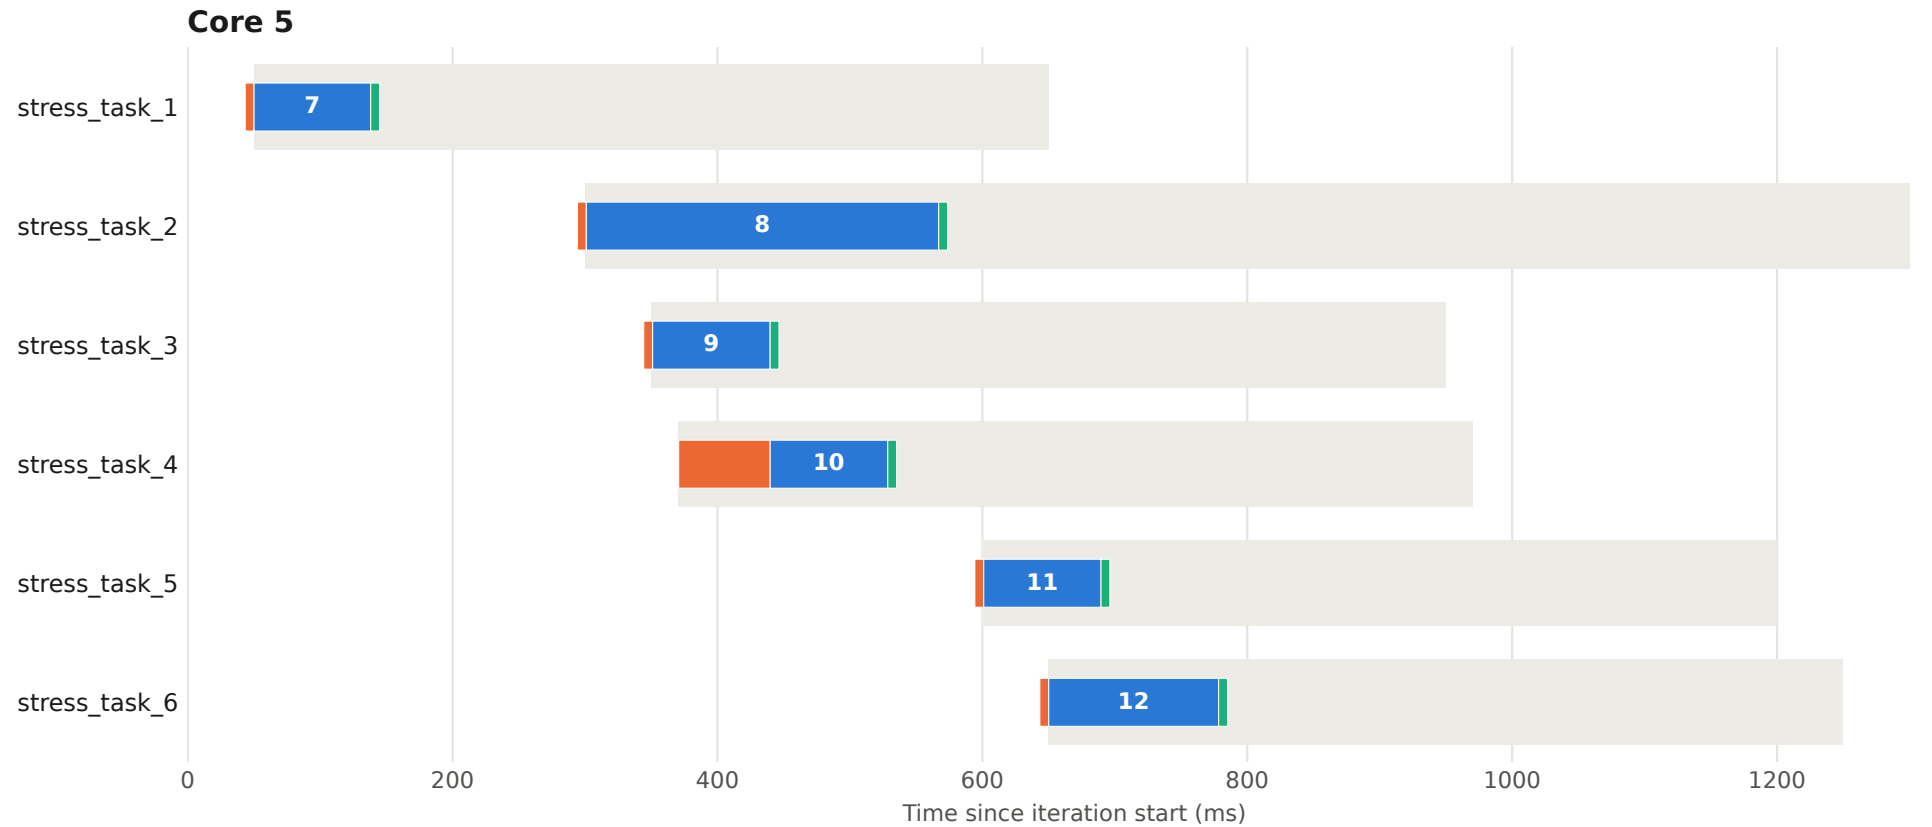


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 1 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

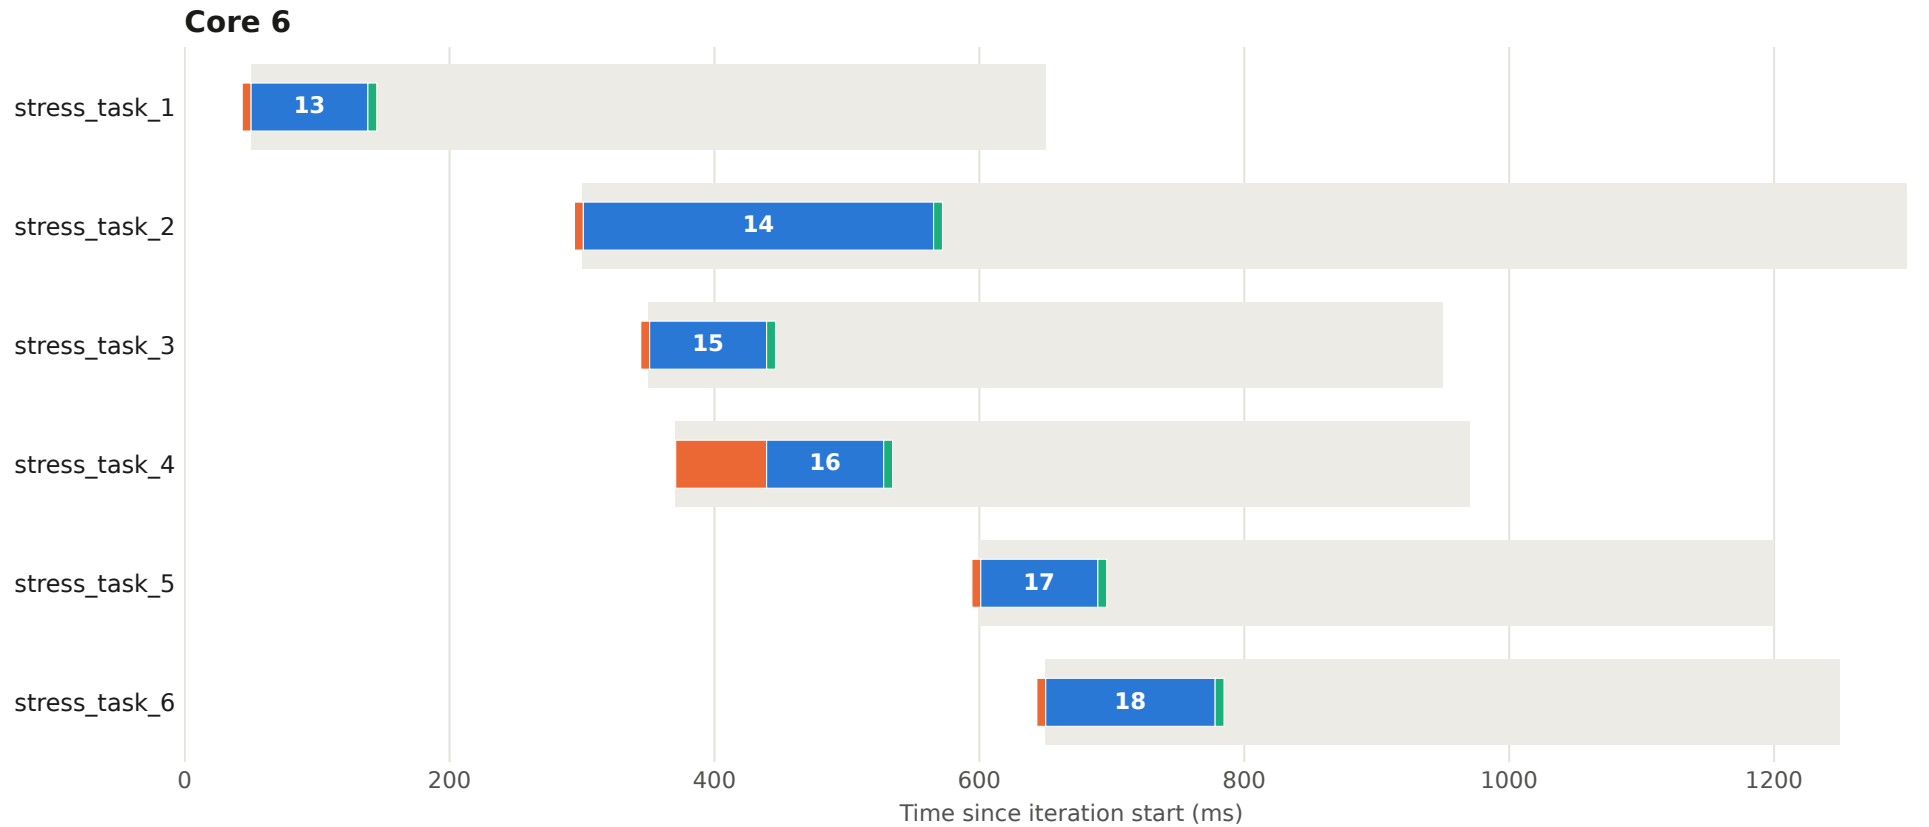


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 1 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

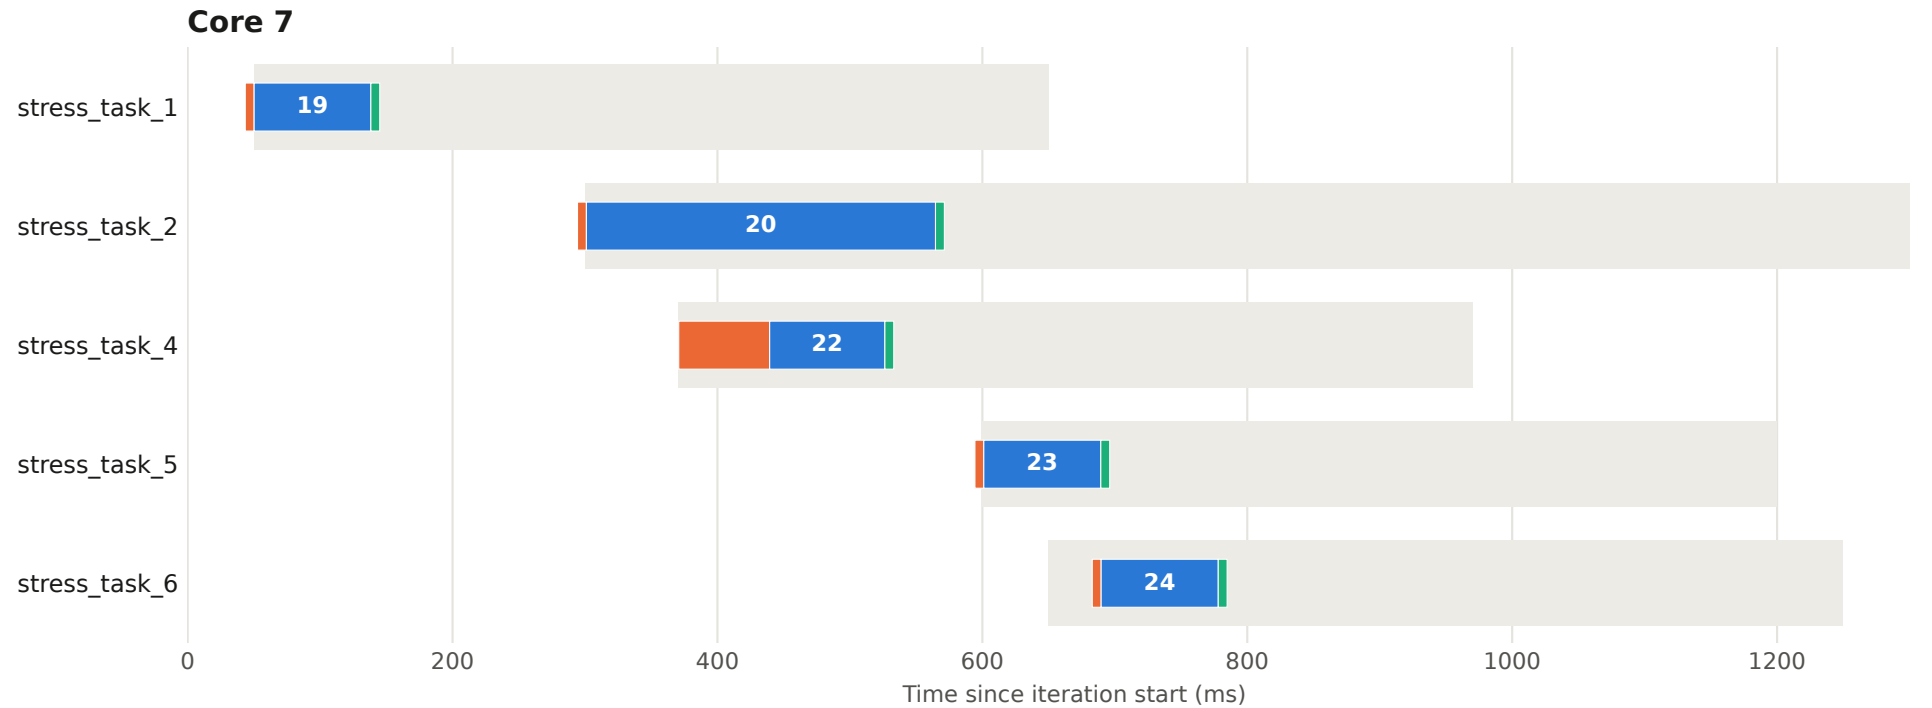


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 2 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

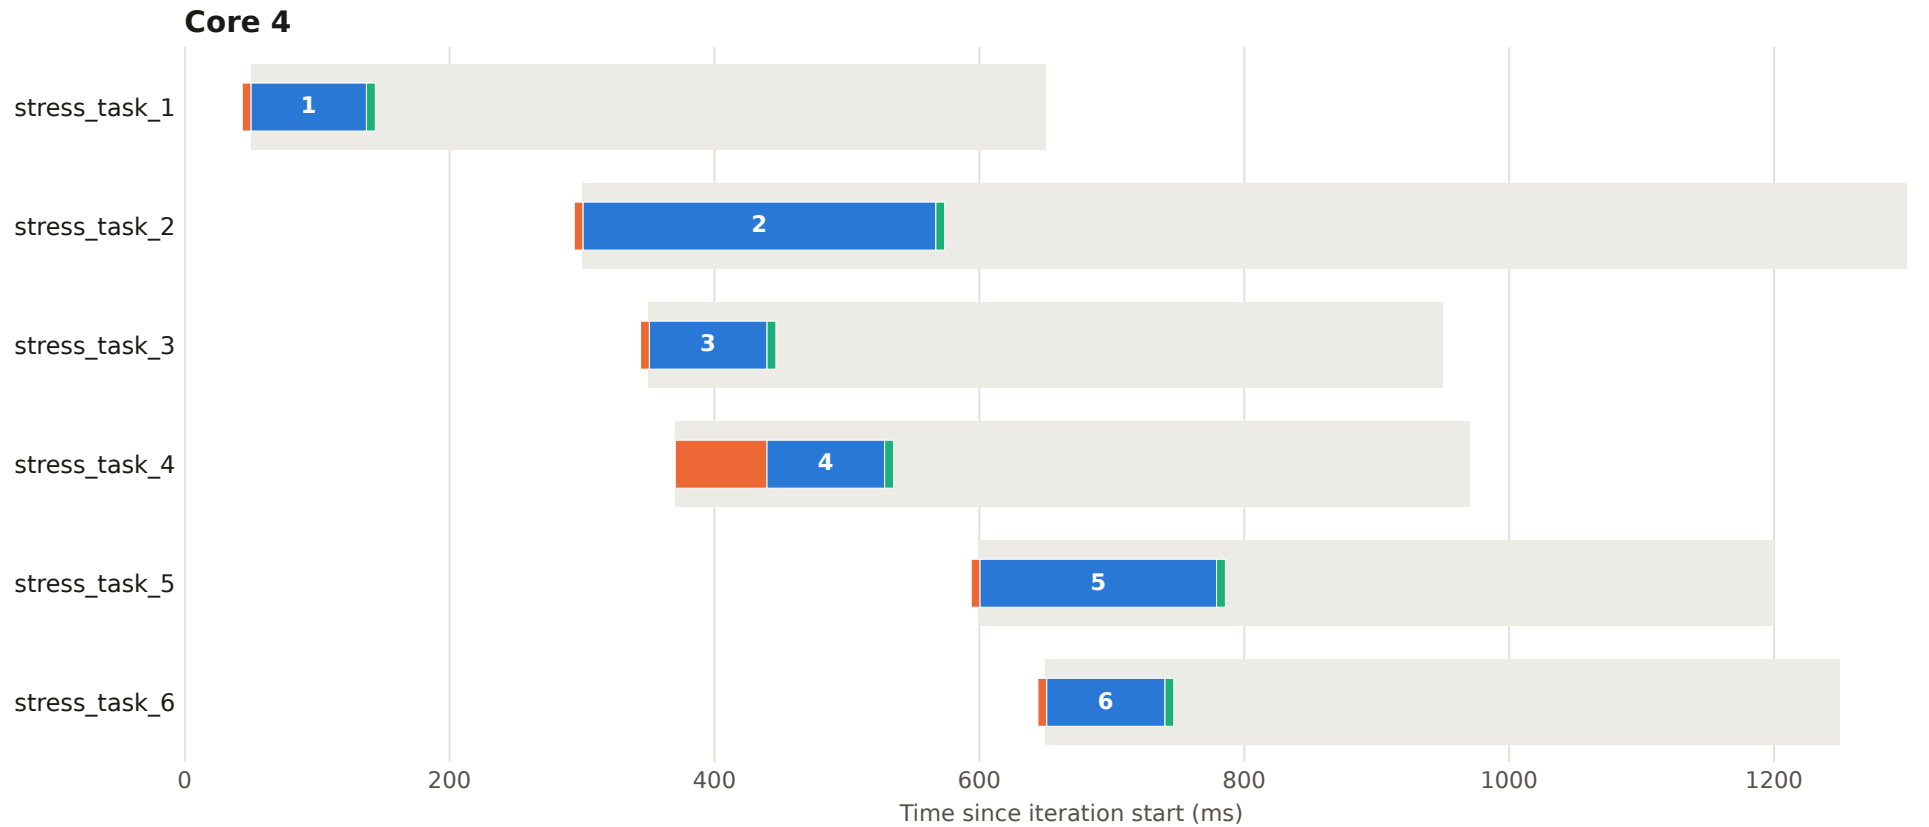


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 2 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

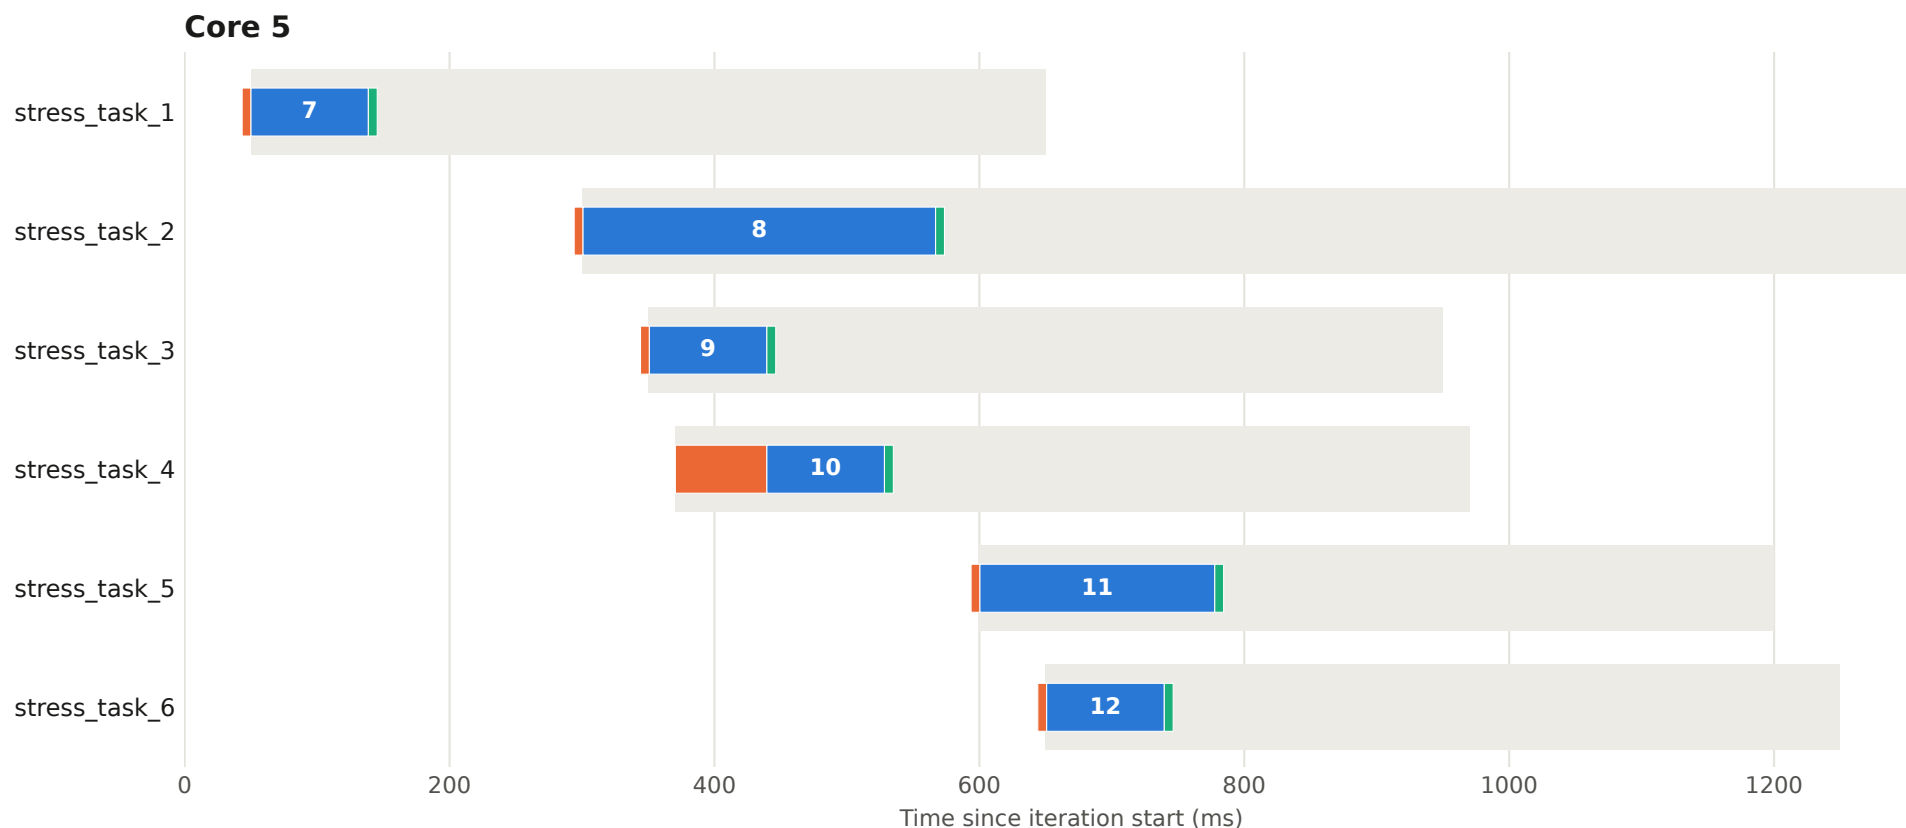


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 2 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

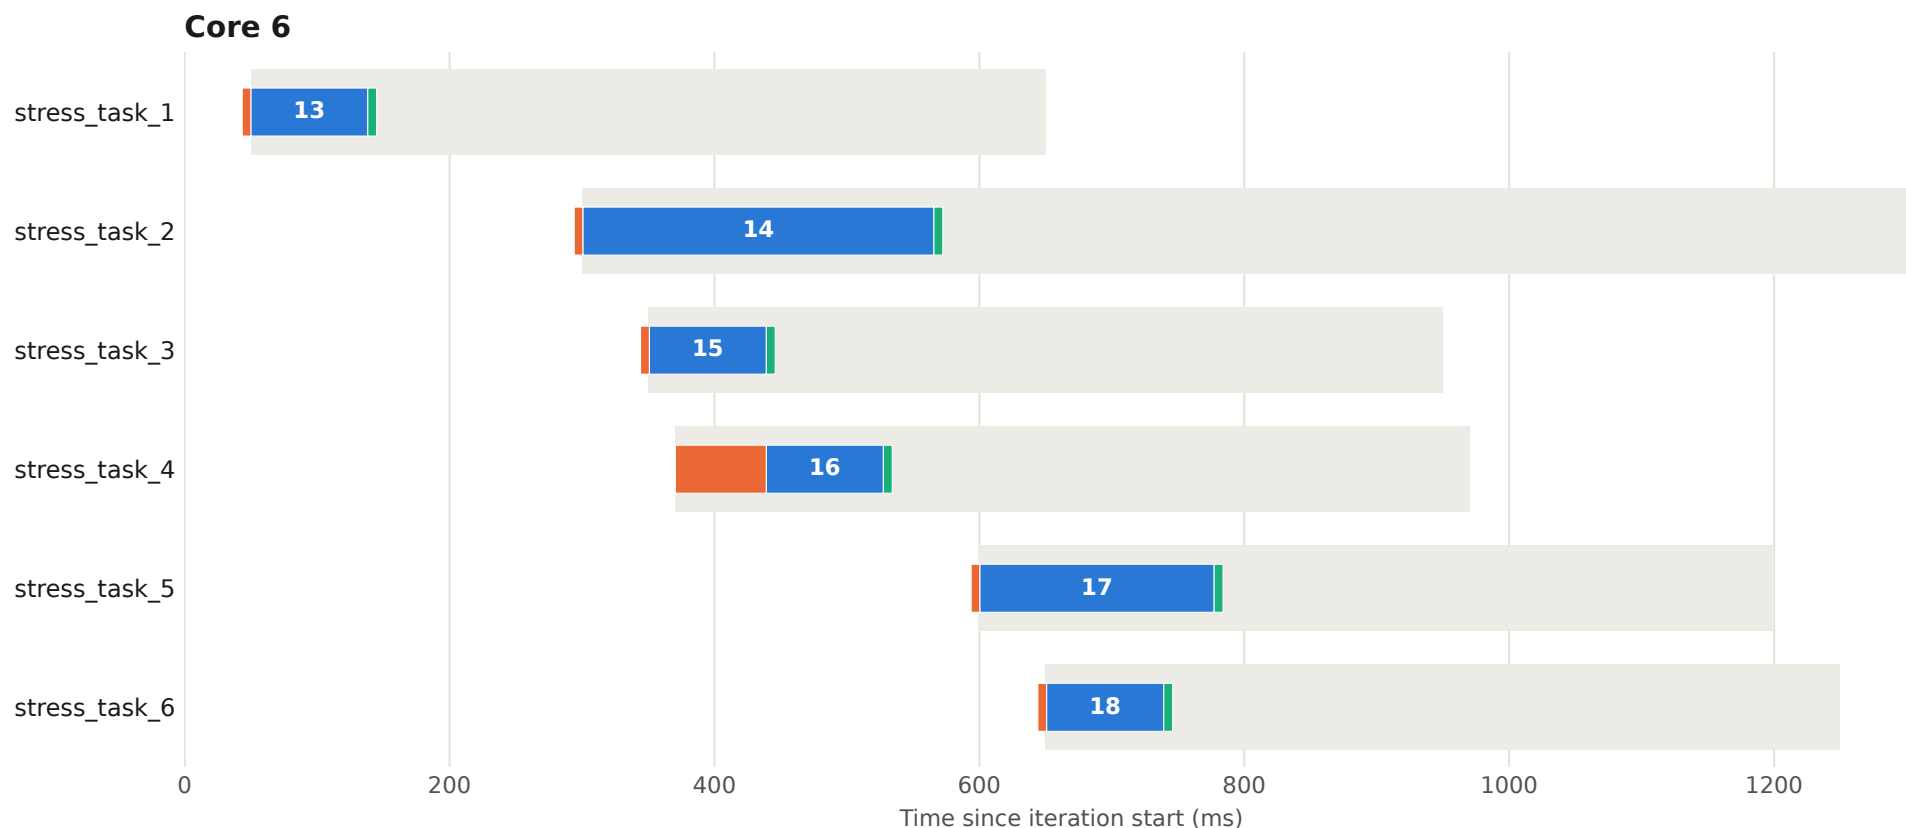


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 2 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

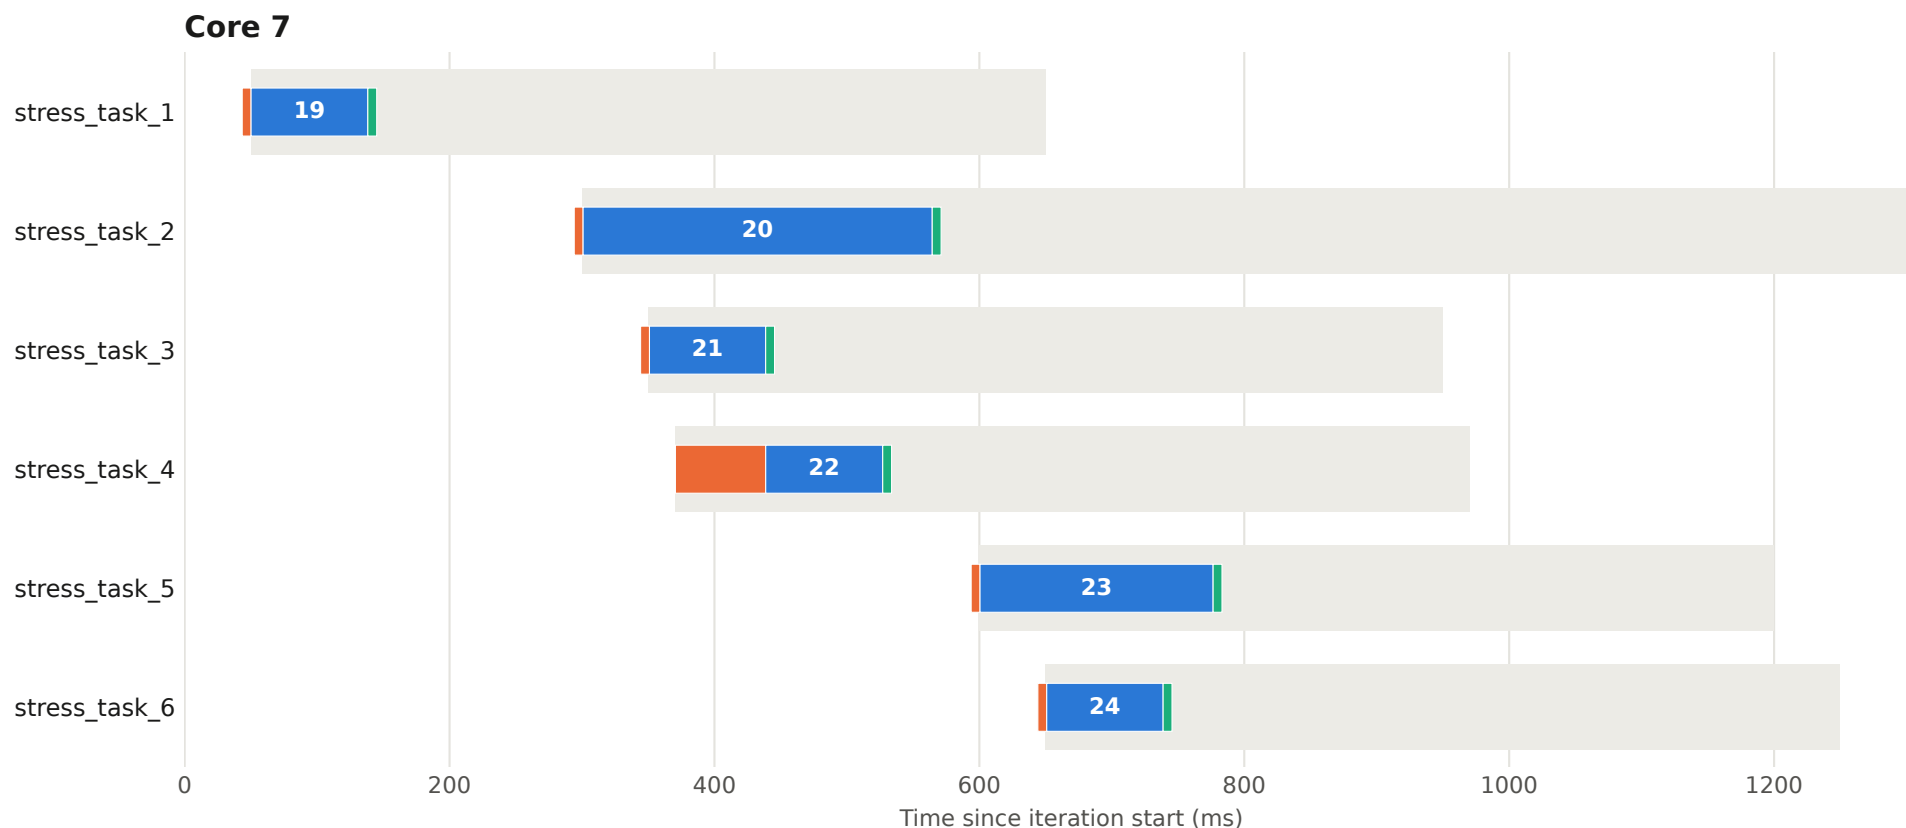


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 3 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

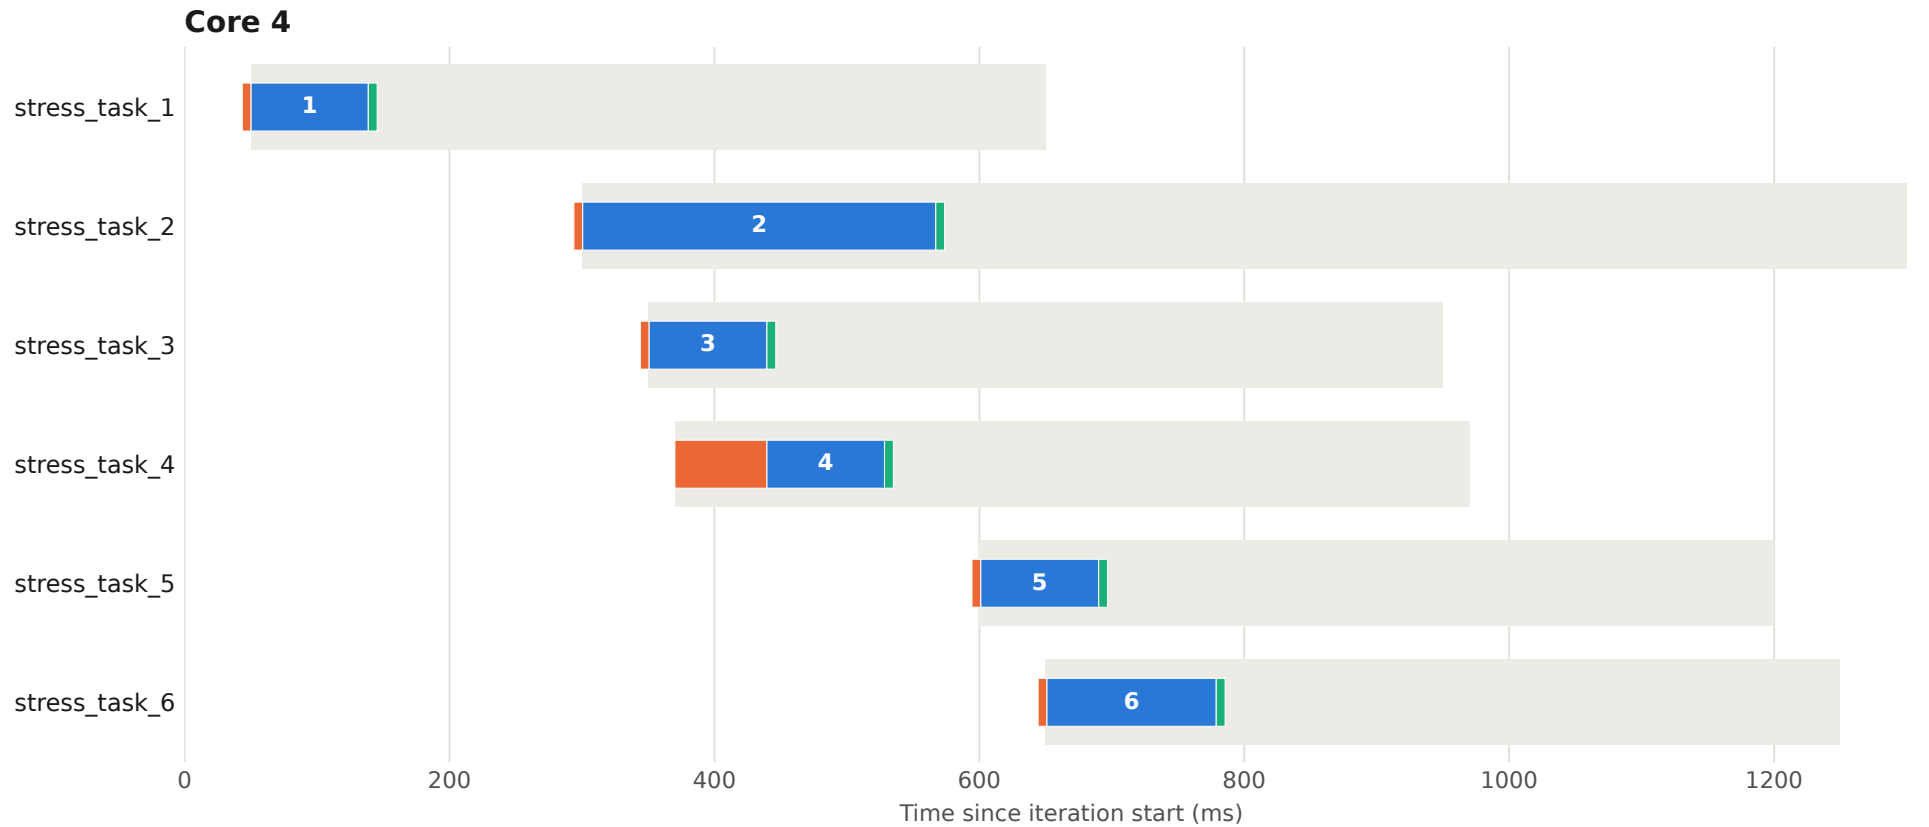


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 3 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

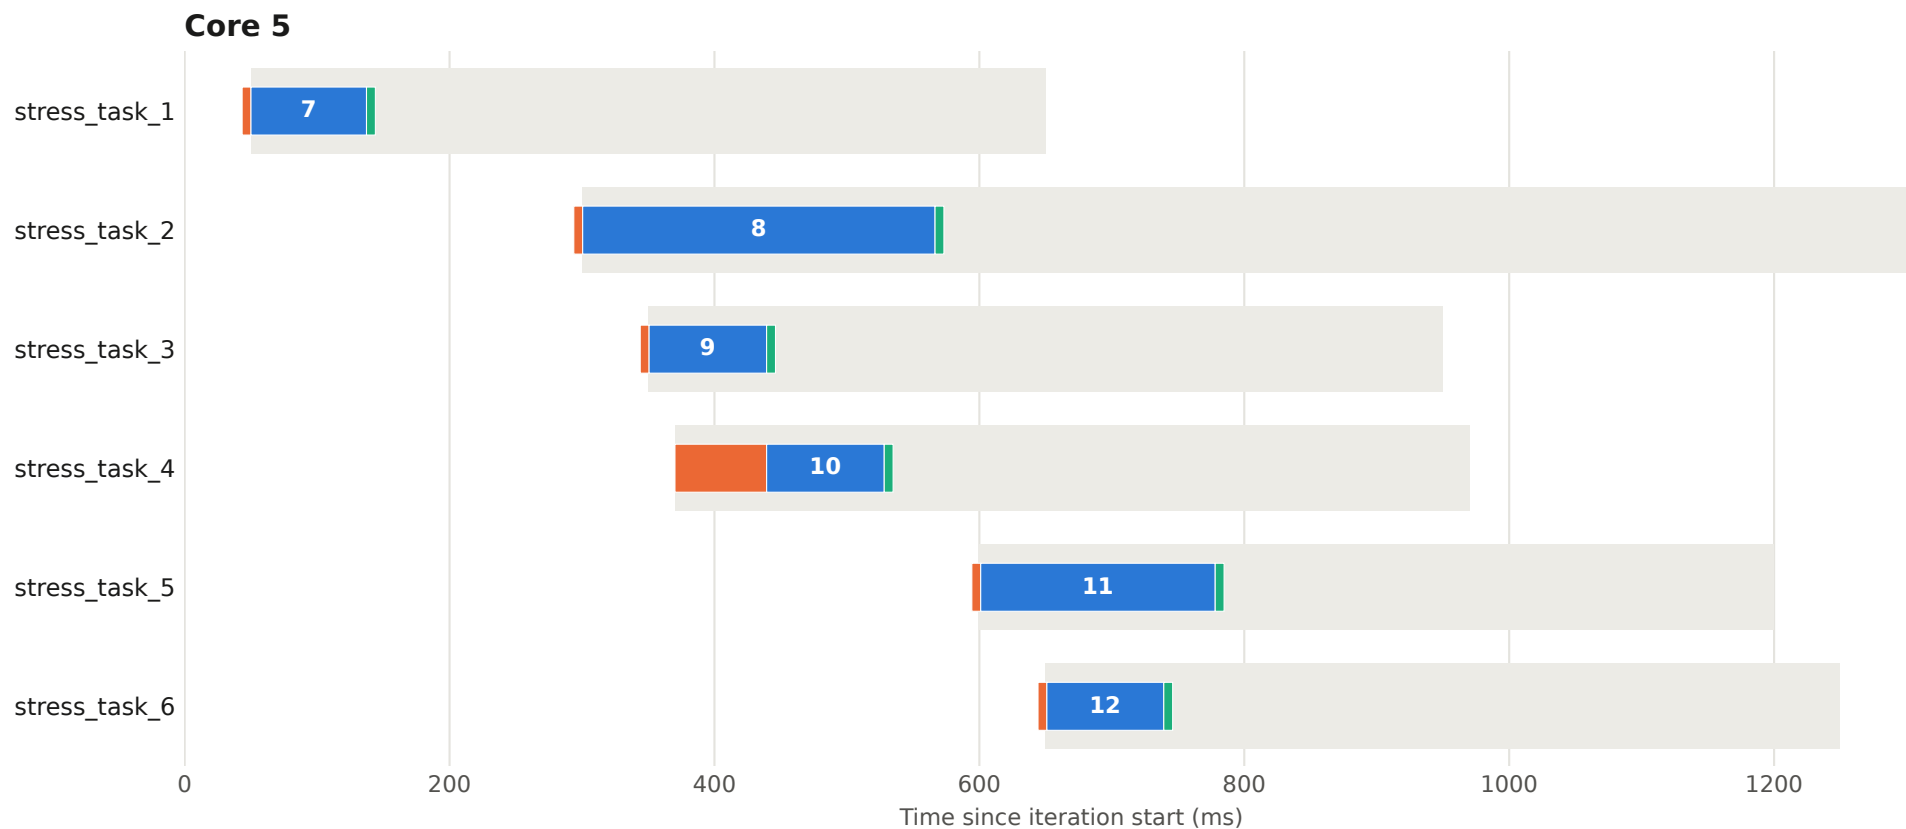


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 3 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

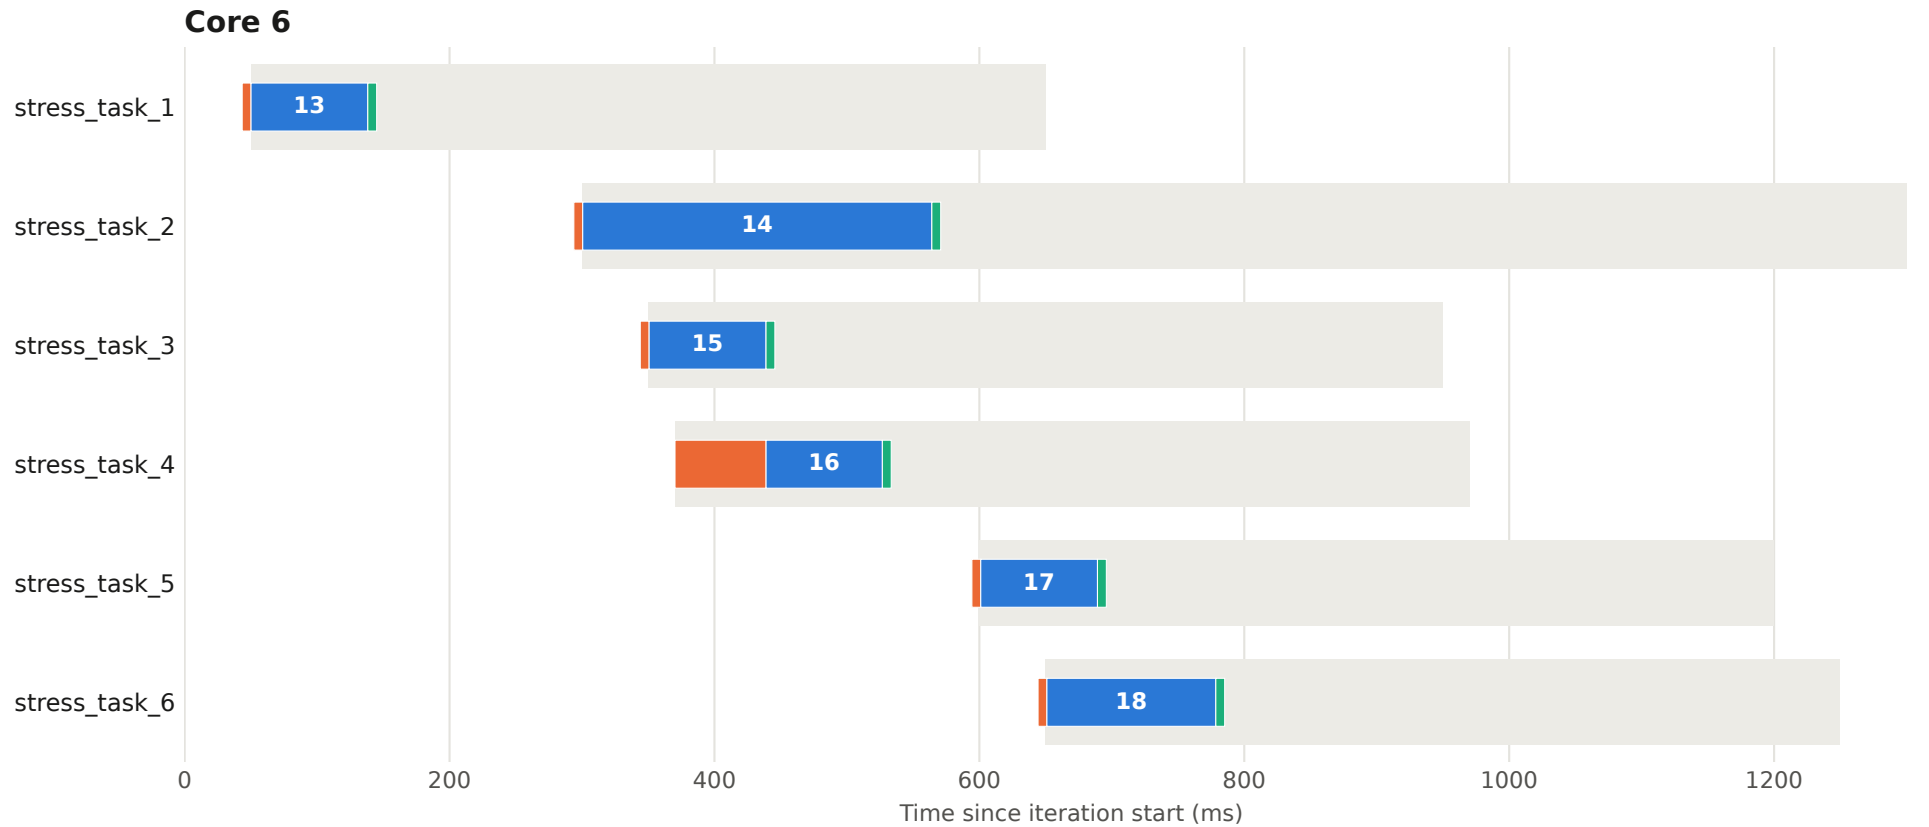


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 3 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

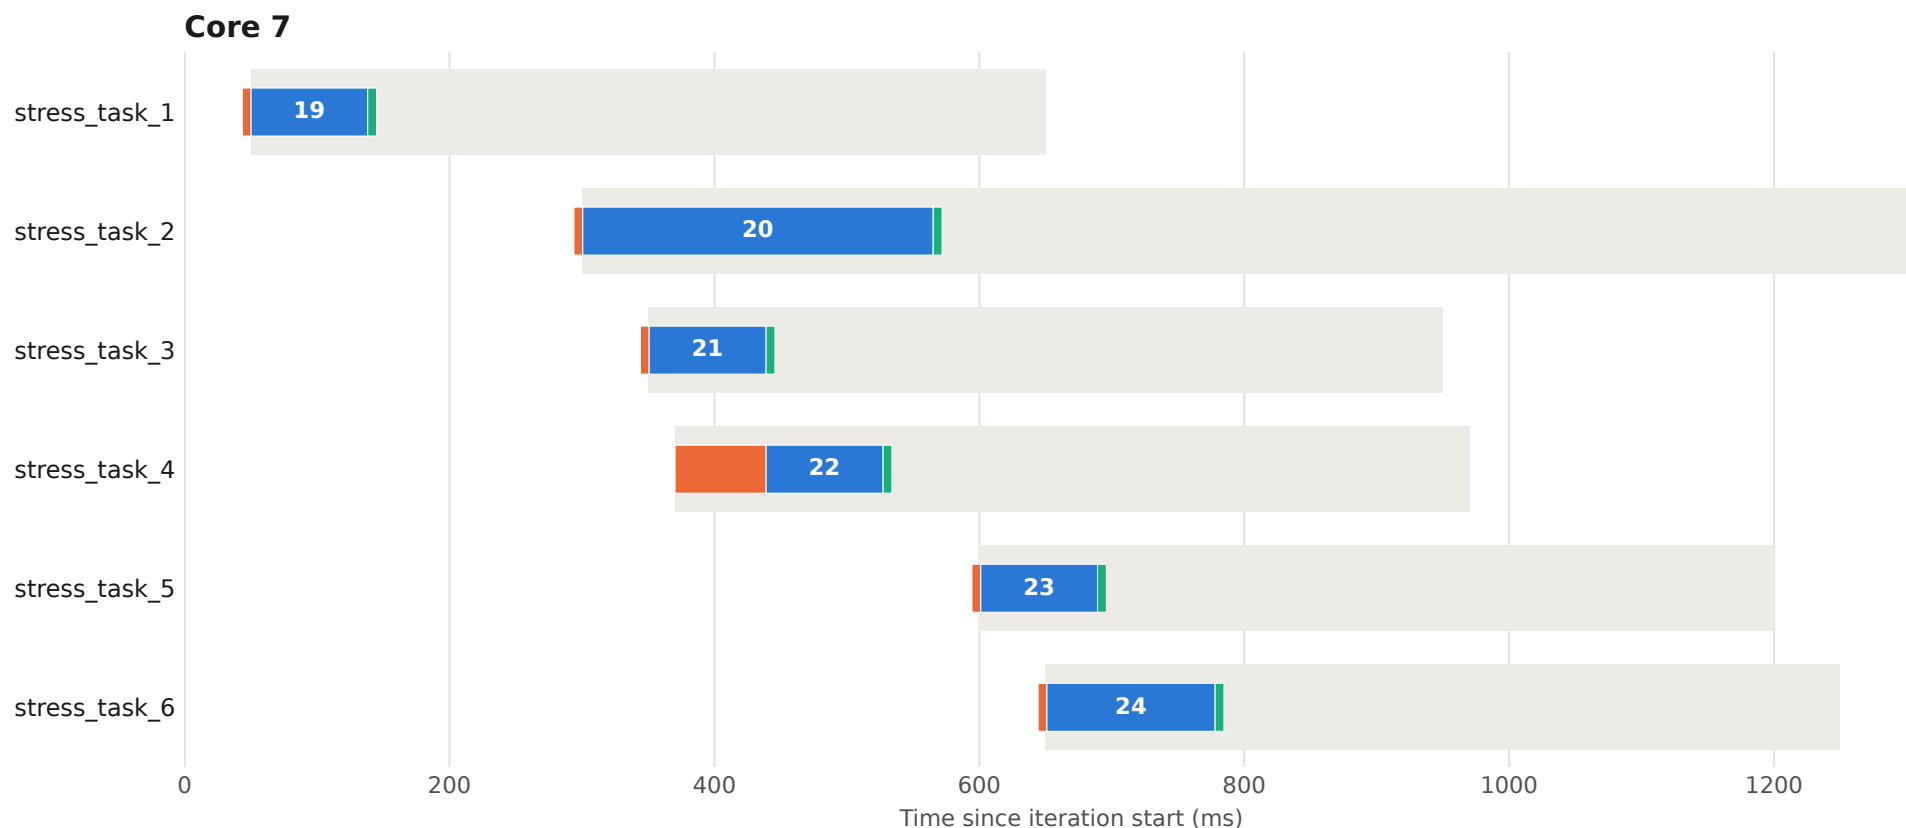


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 4 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

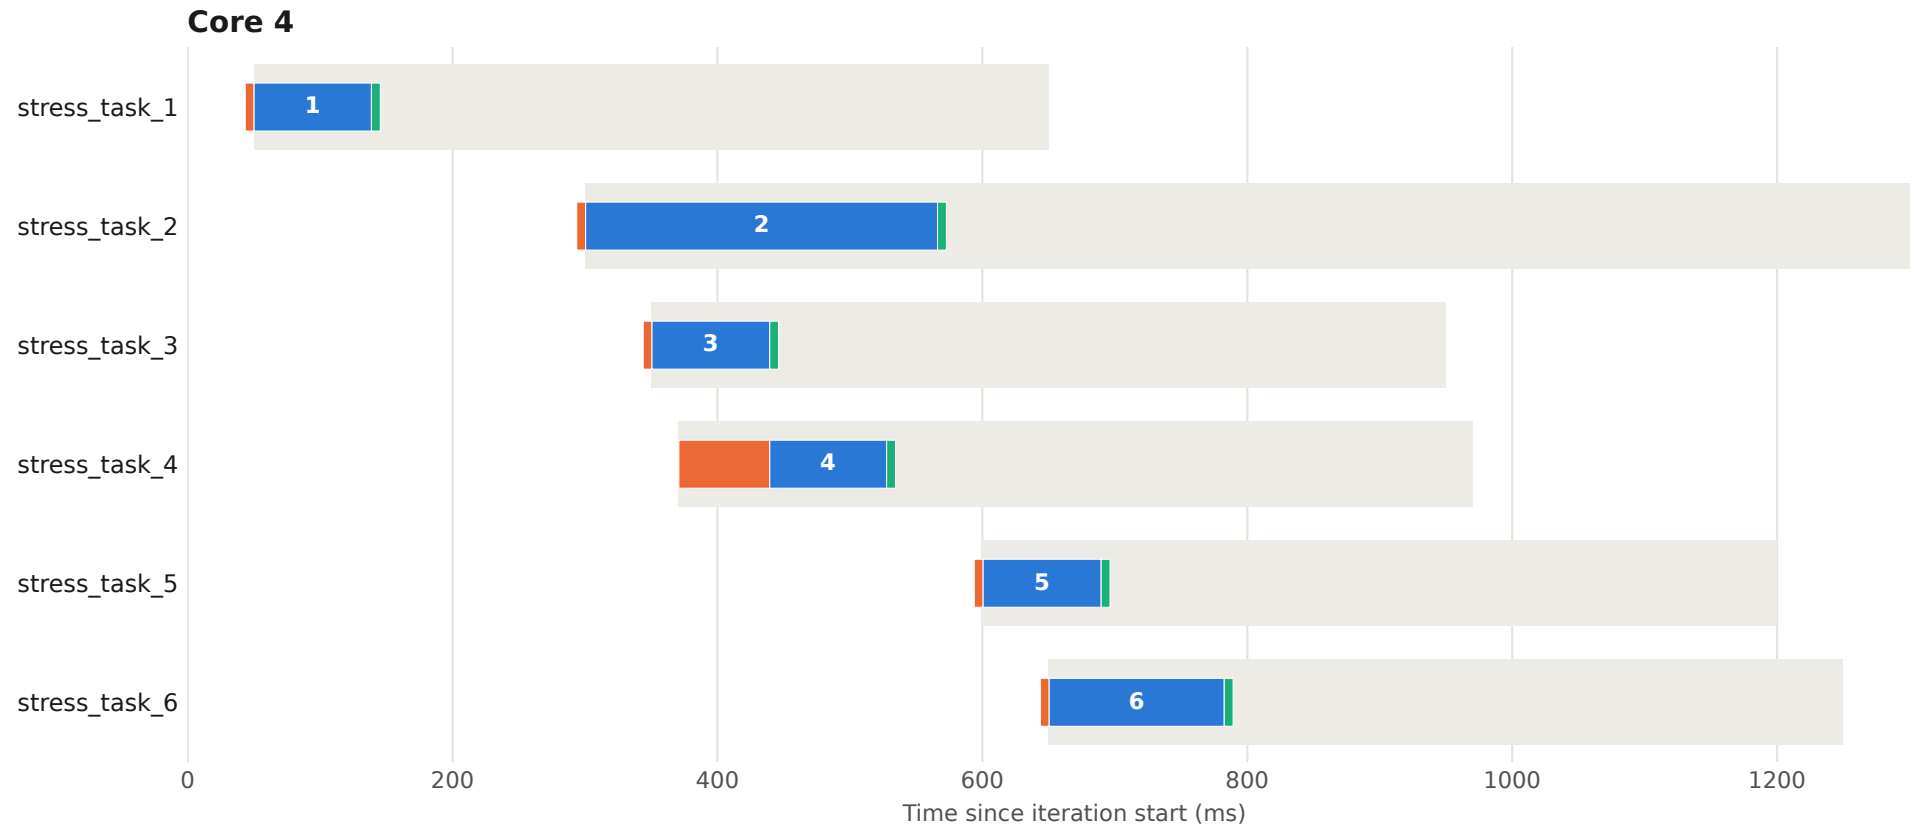


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 4 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

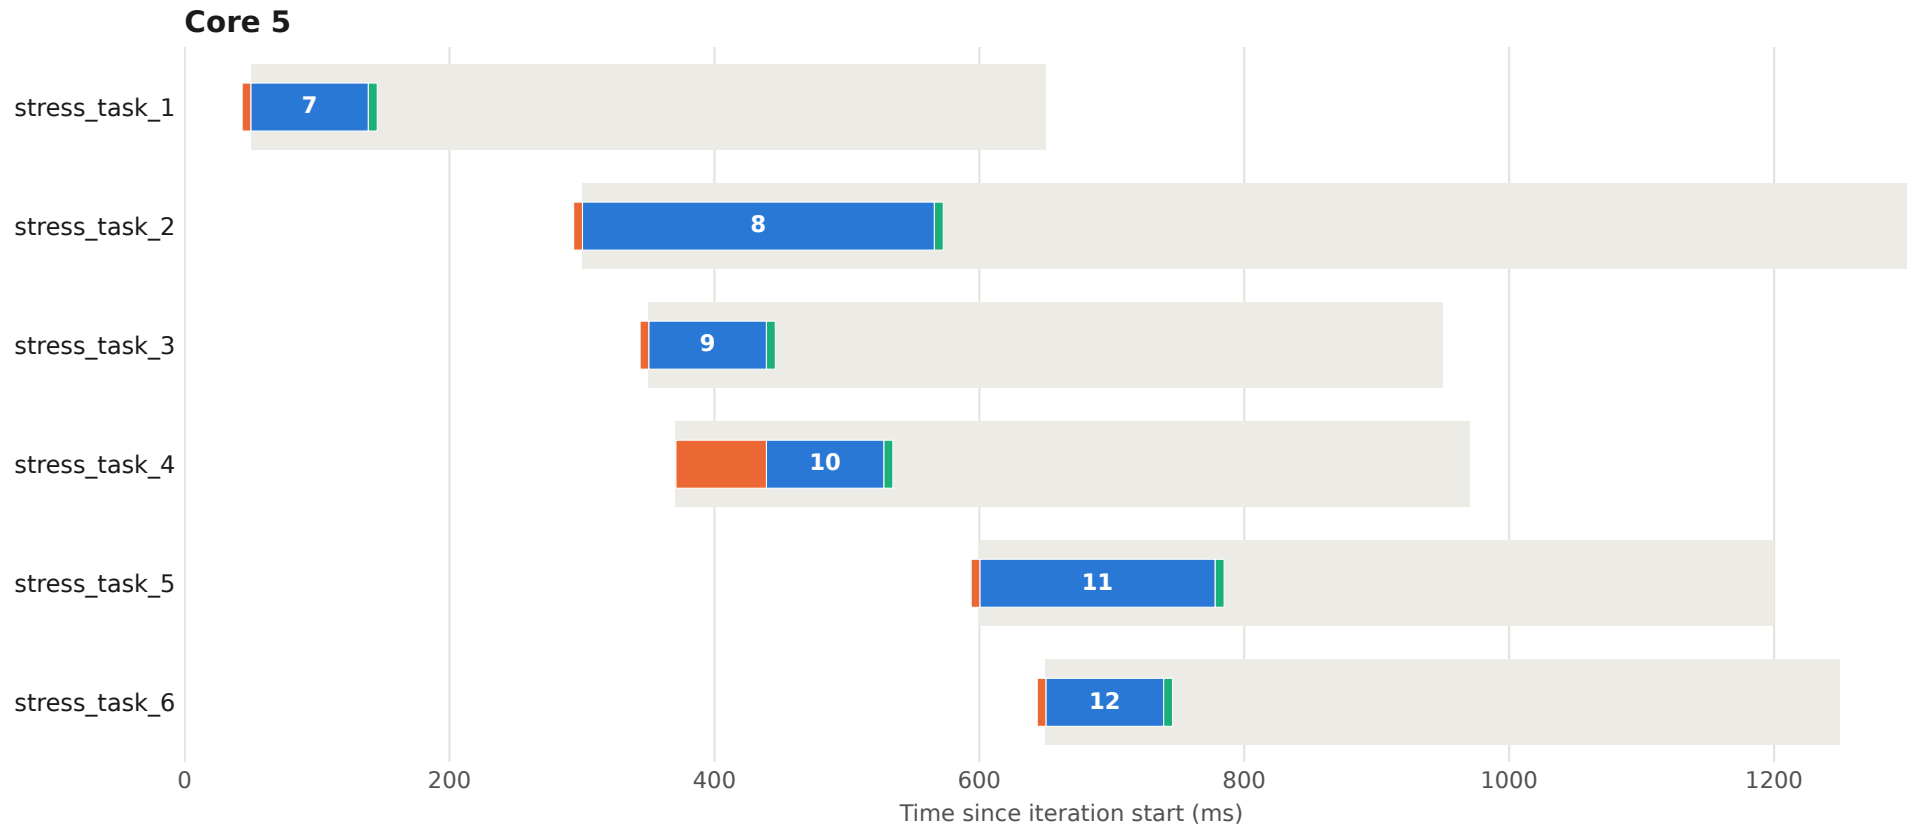


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 4 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

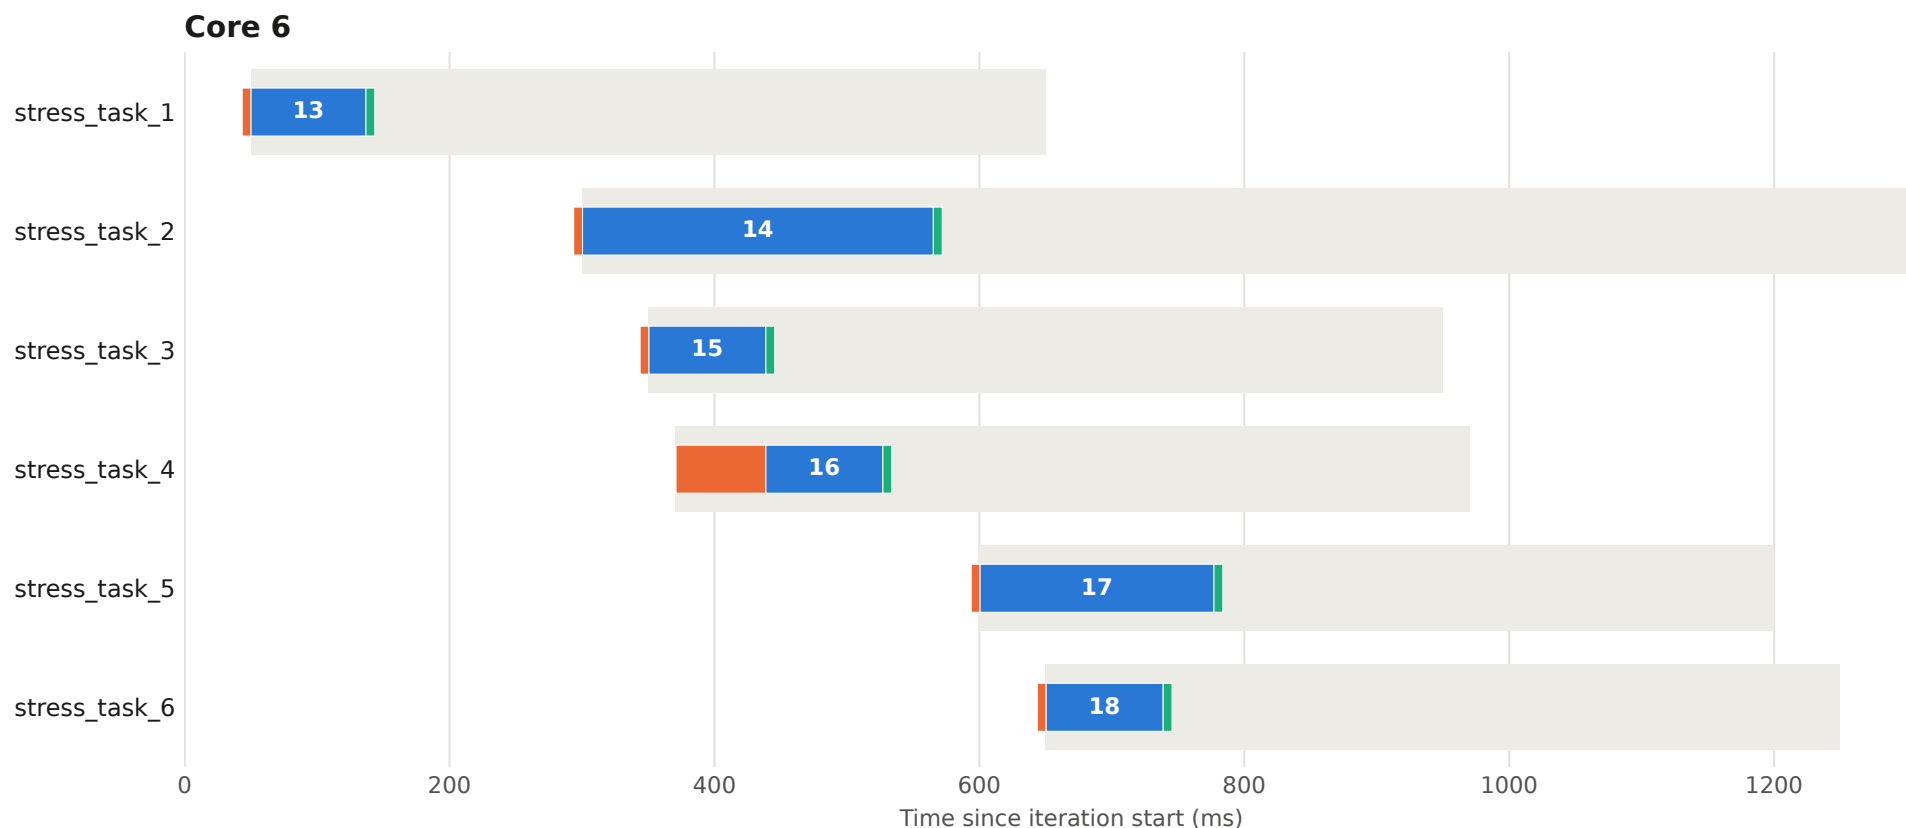


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 4 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

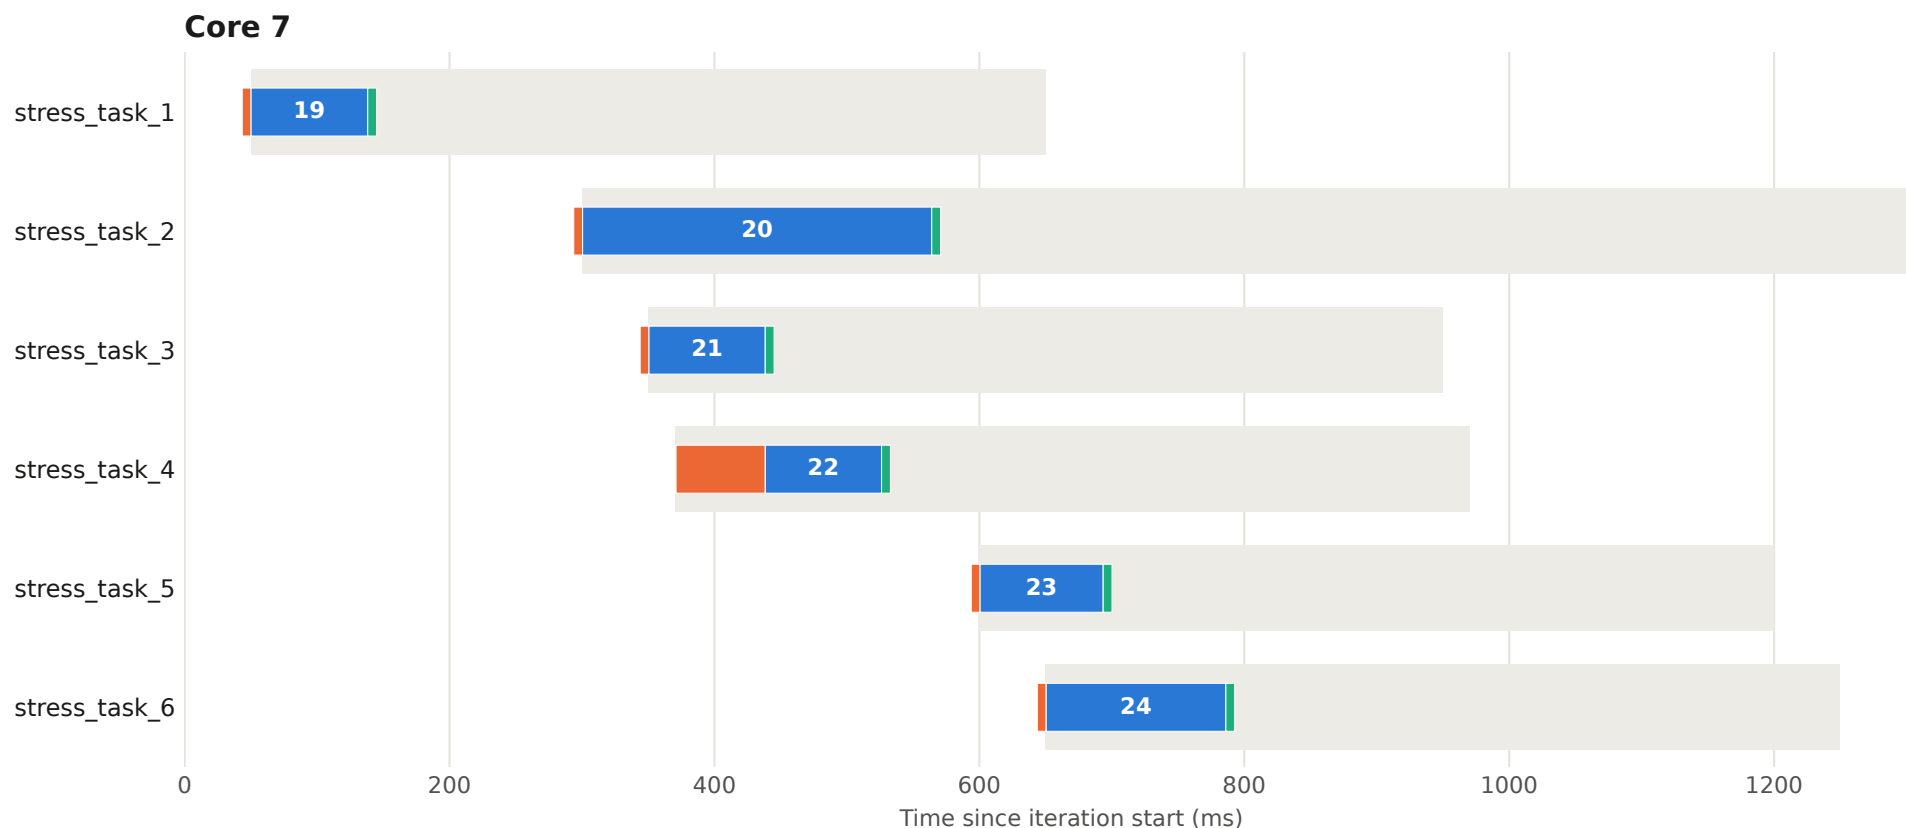


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 5 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

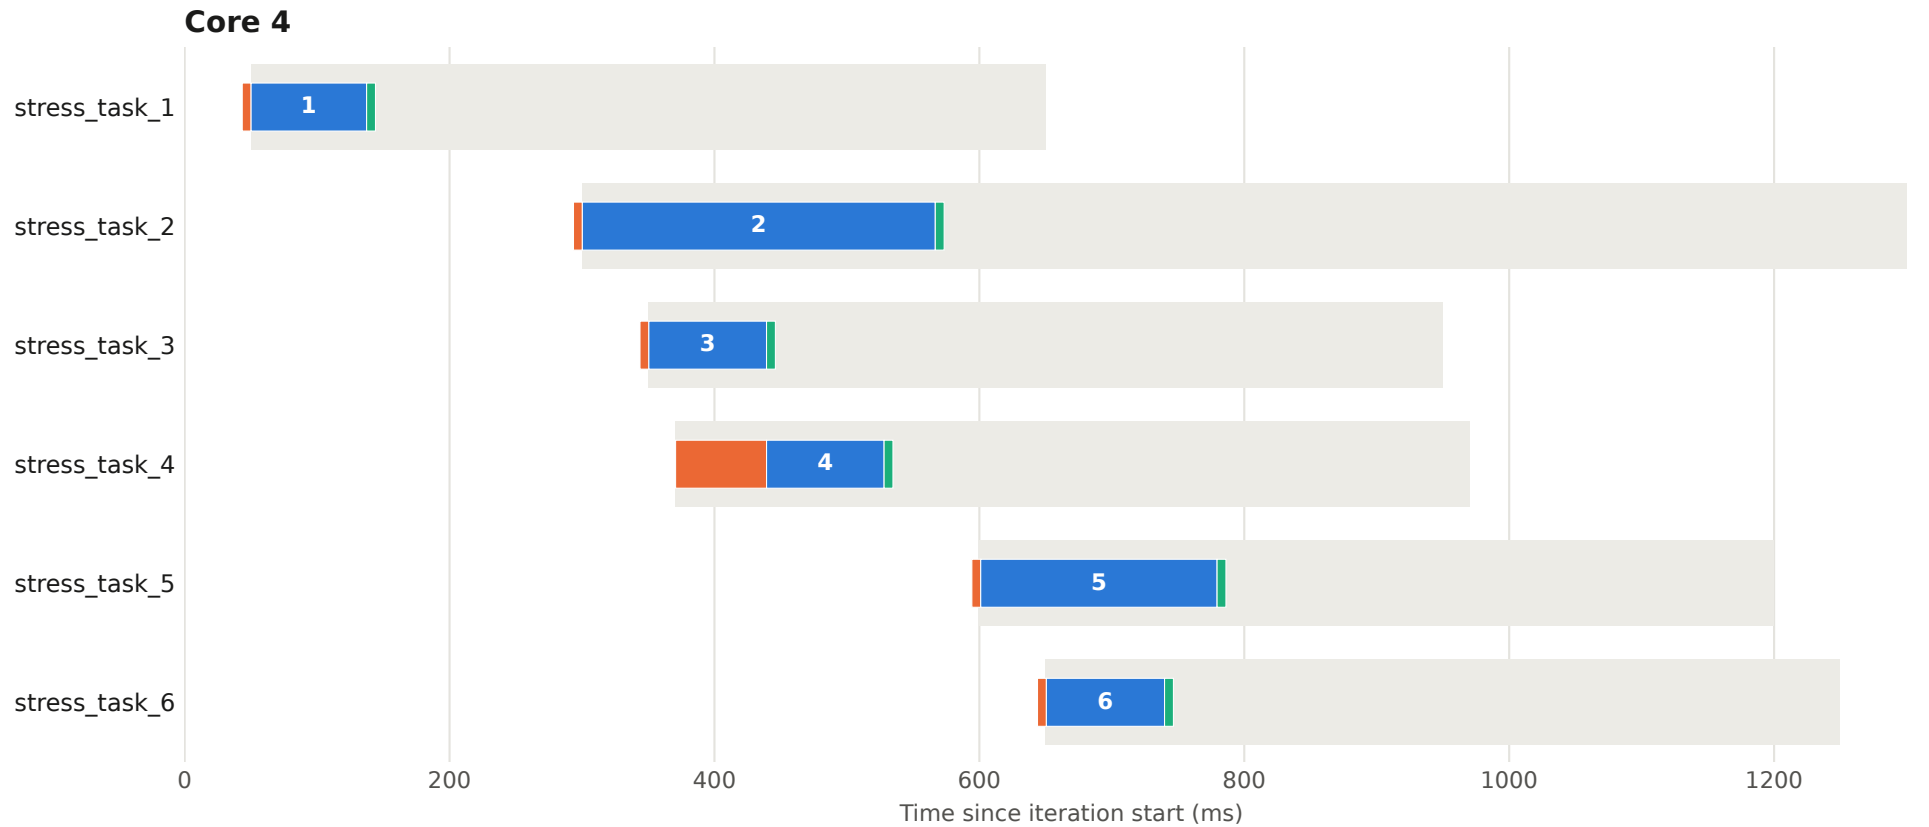


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 5 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

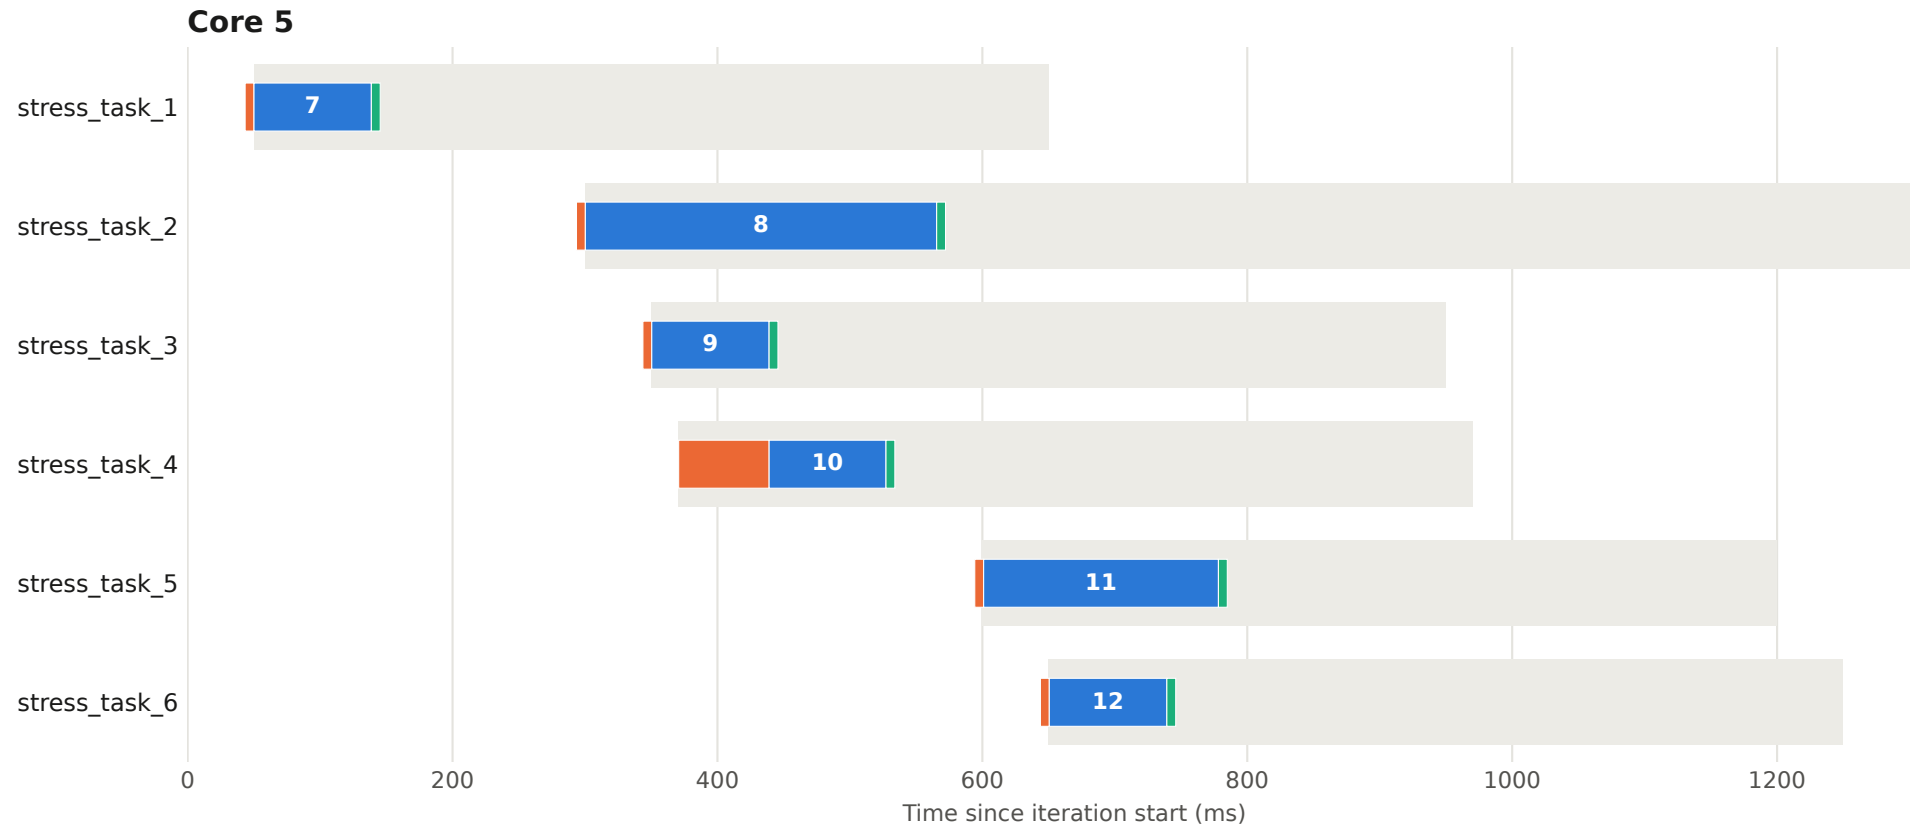


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 5 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

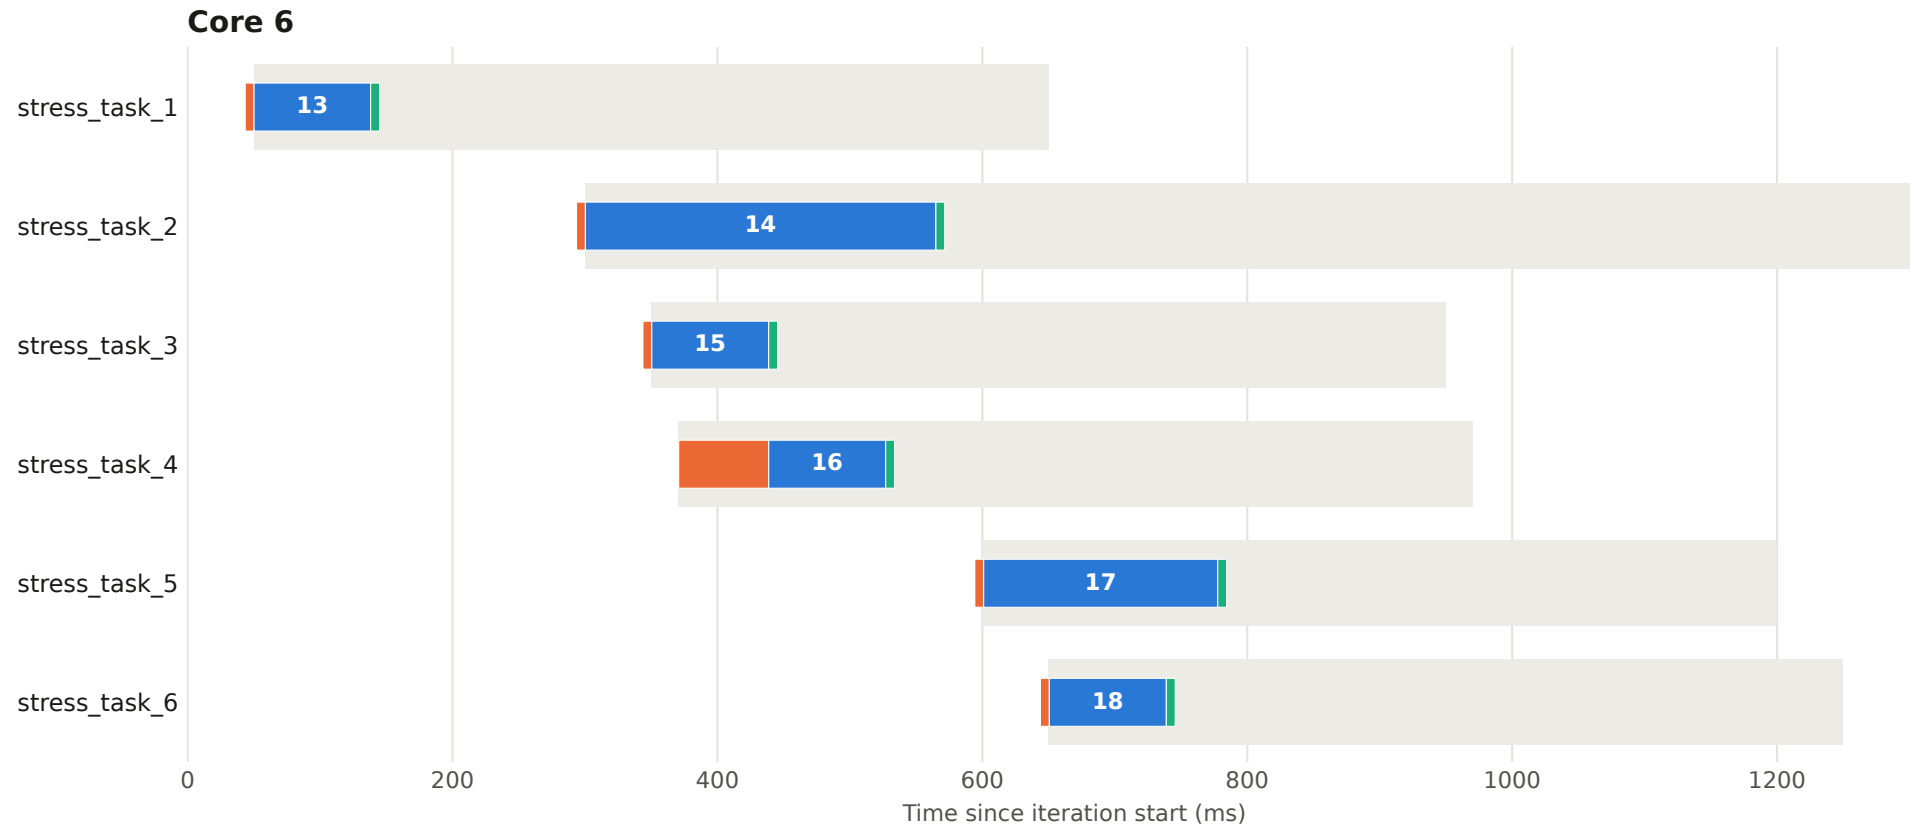


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 5 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

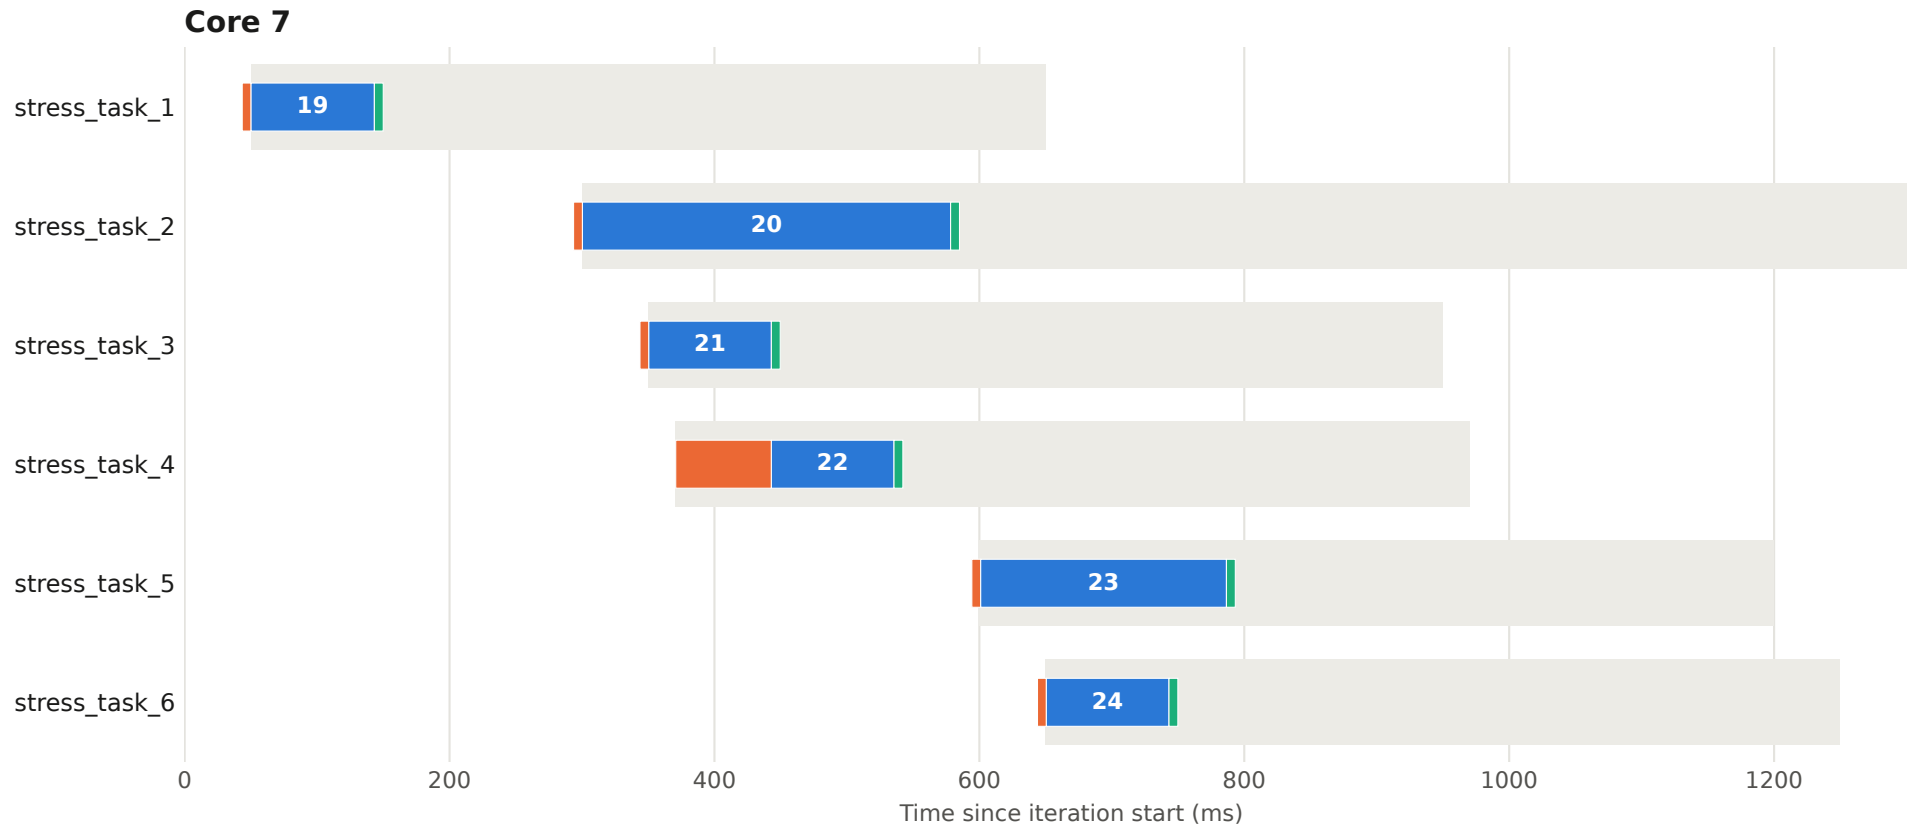


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 6 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

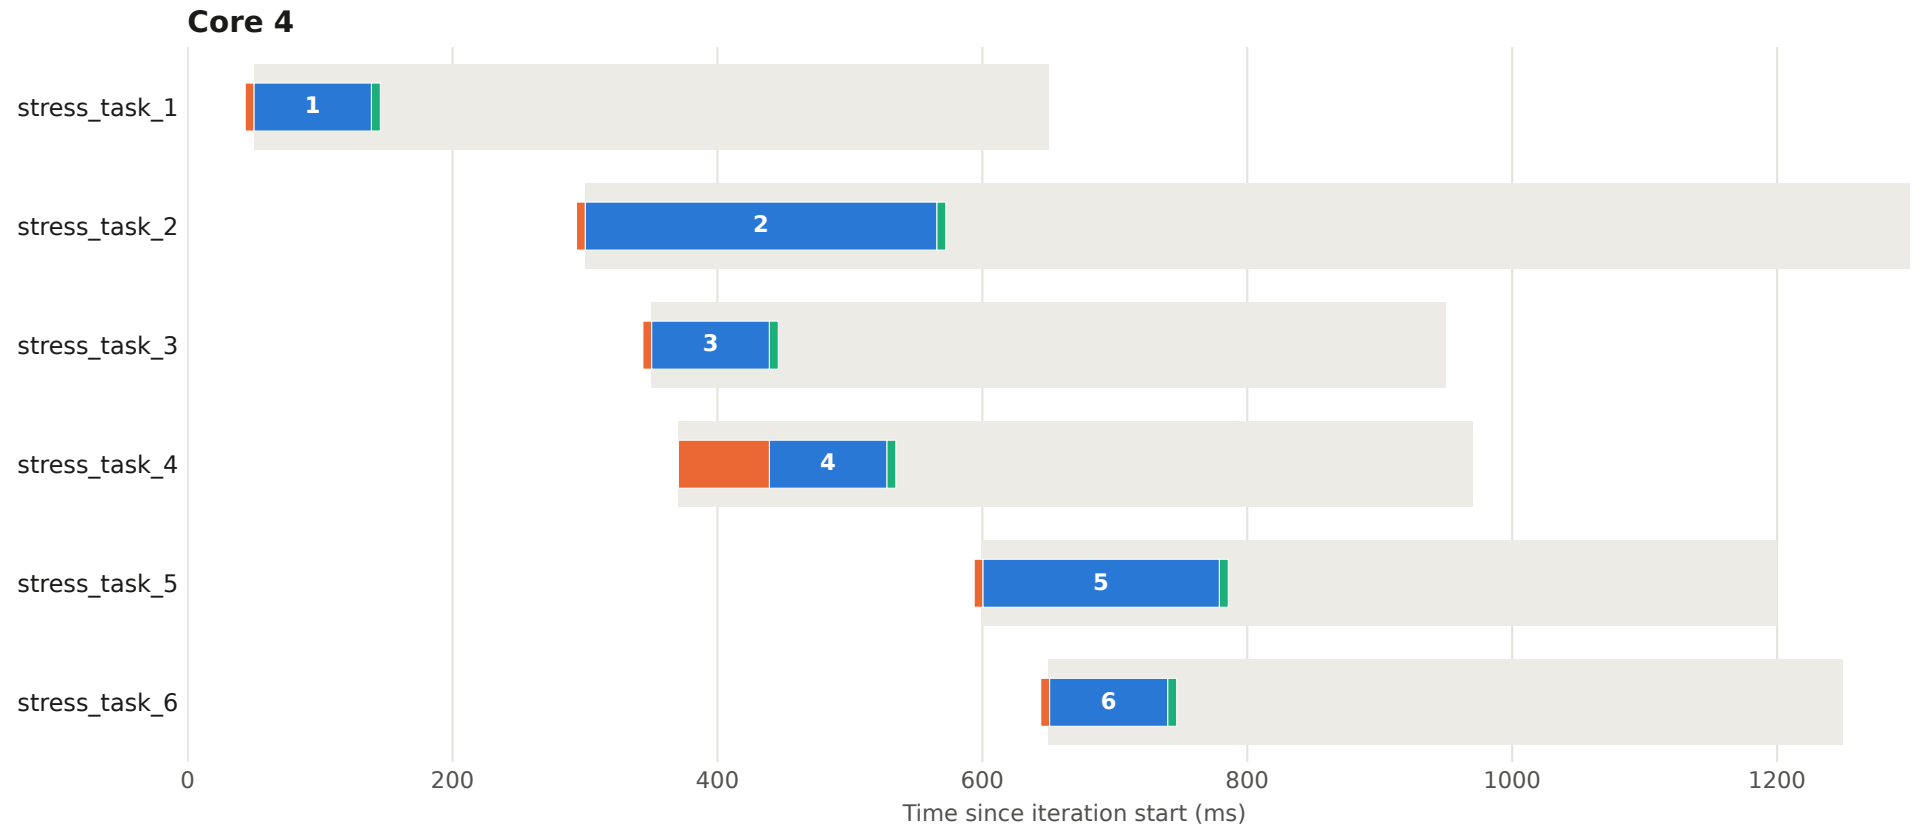


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 6 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

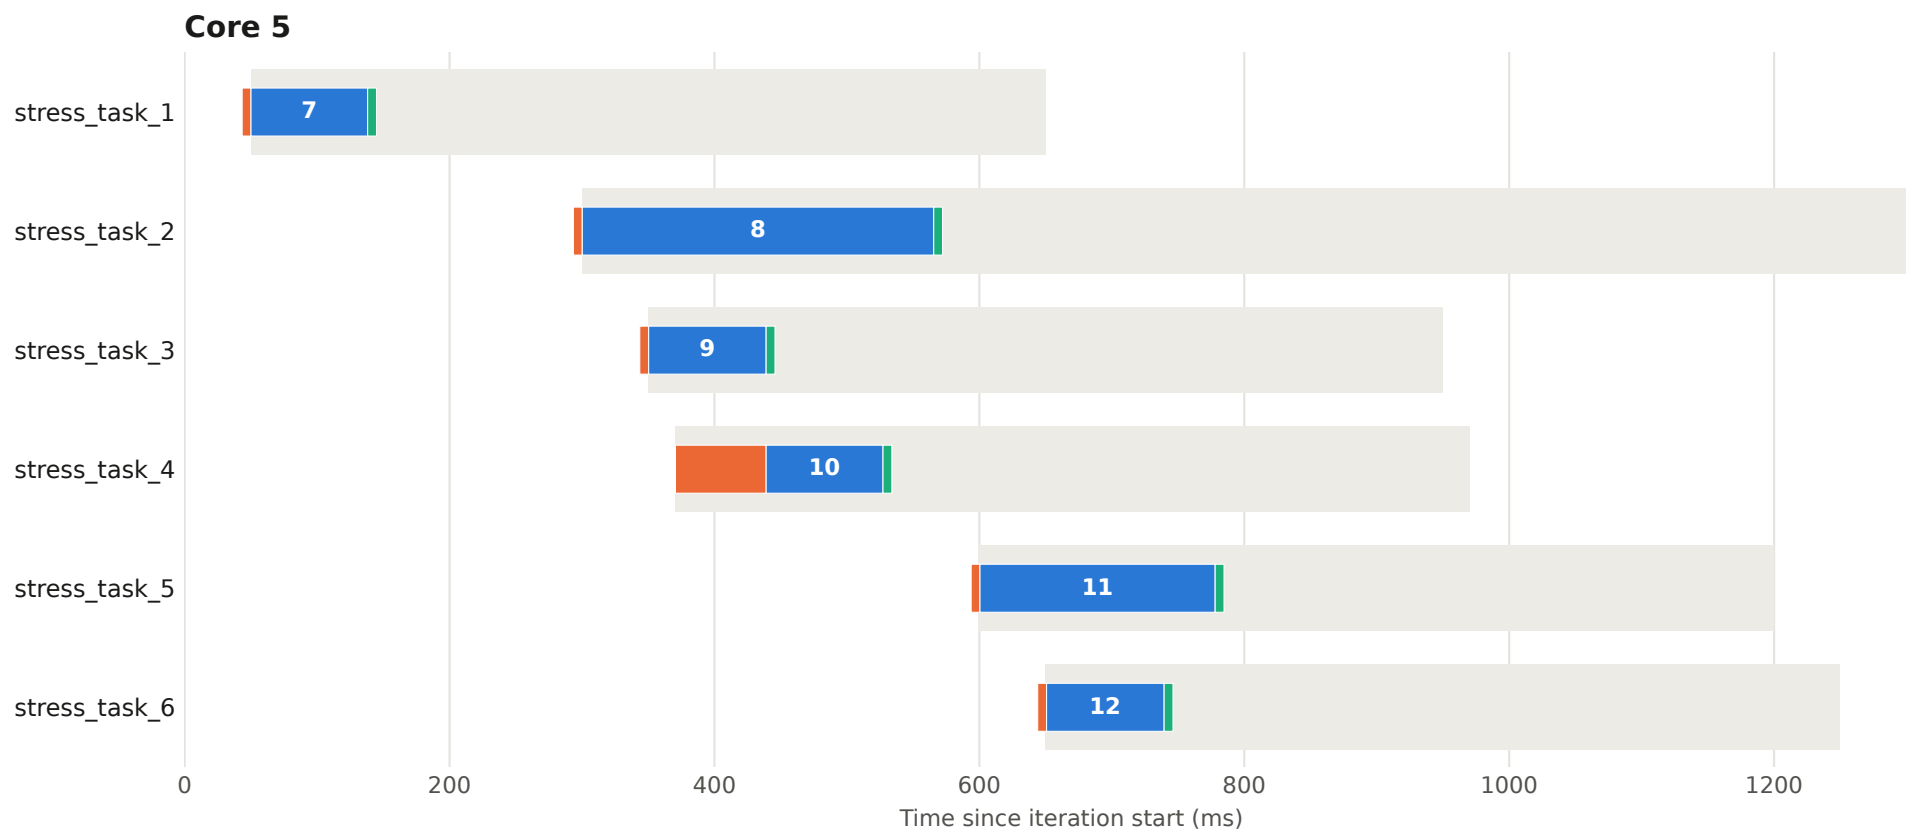


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 6 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

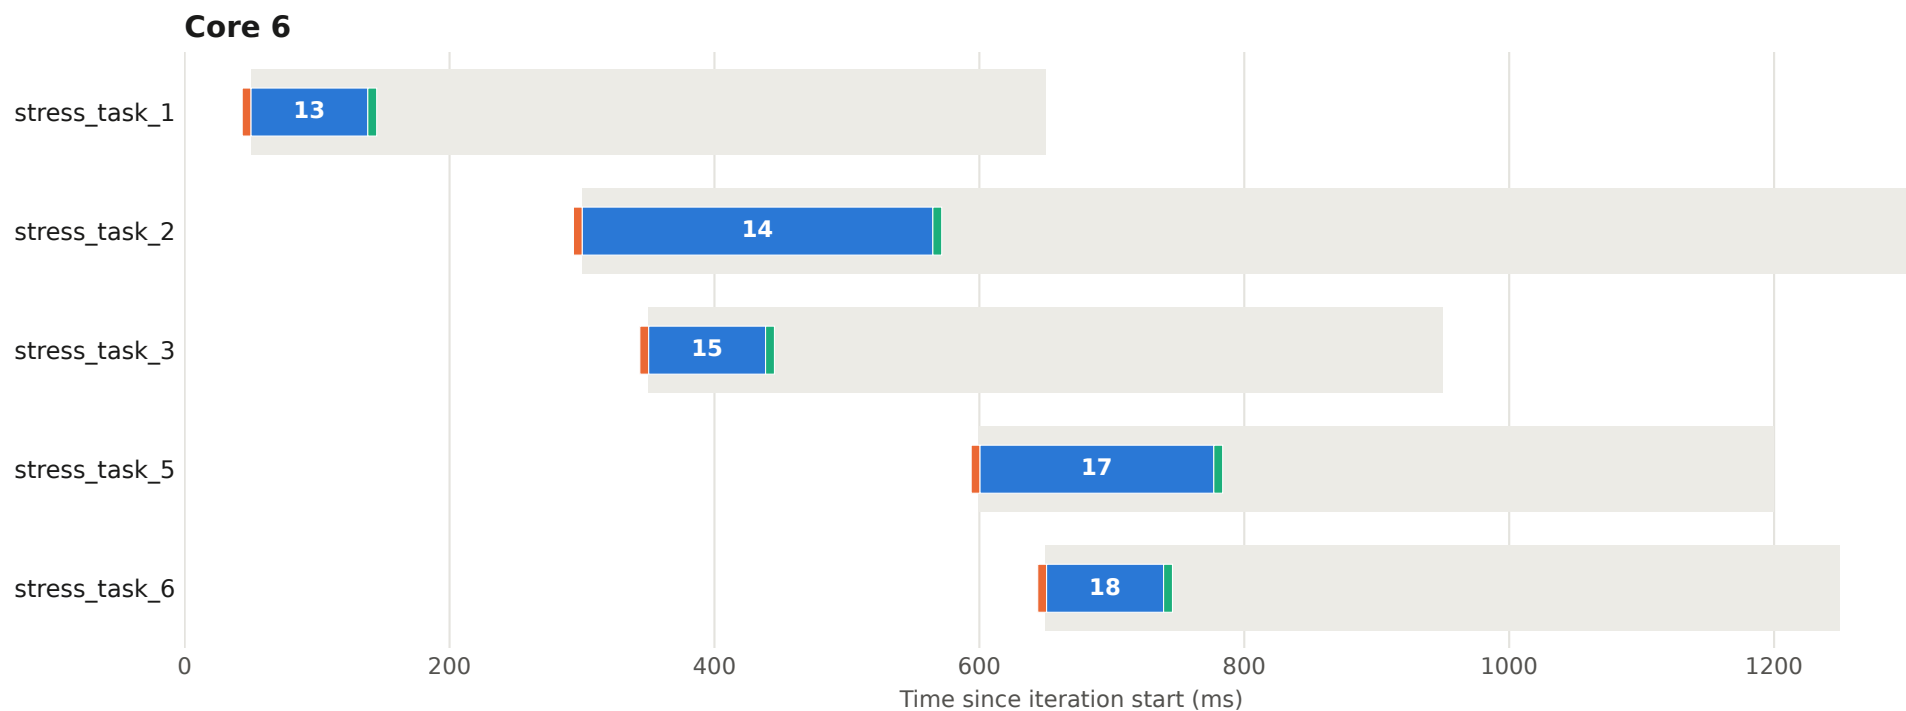




# Execution plan - iteration 6 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

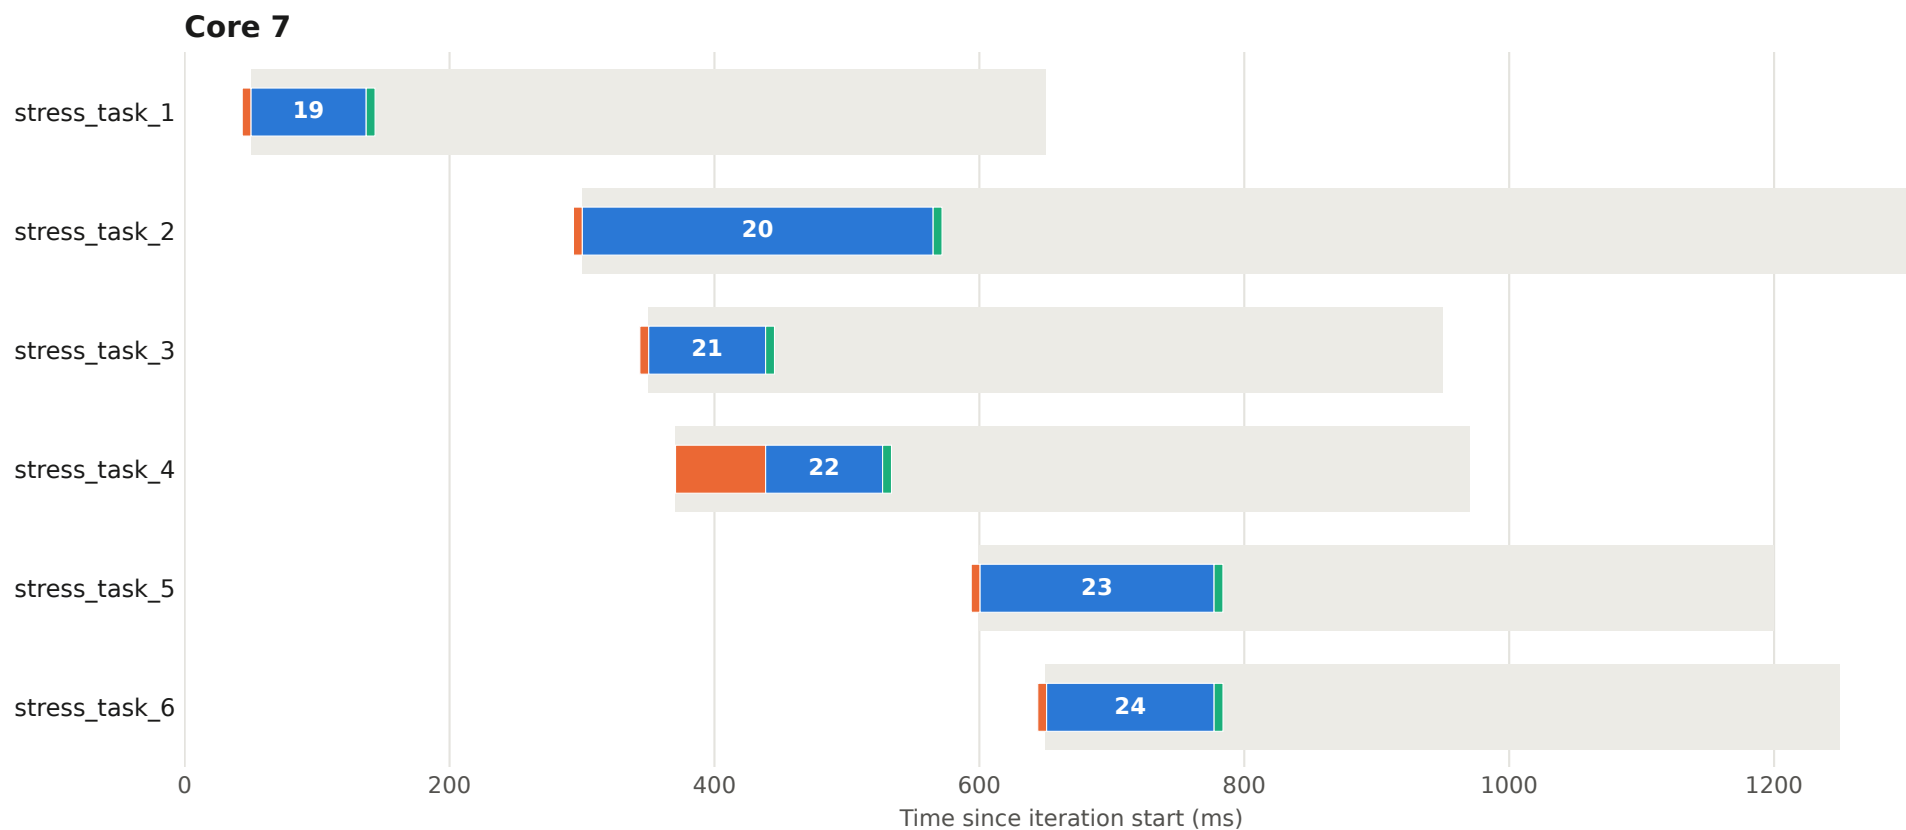


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 7 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

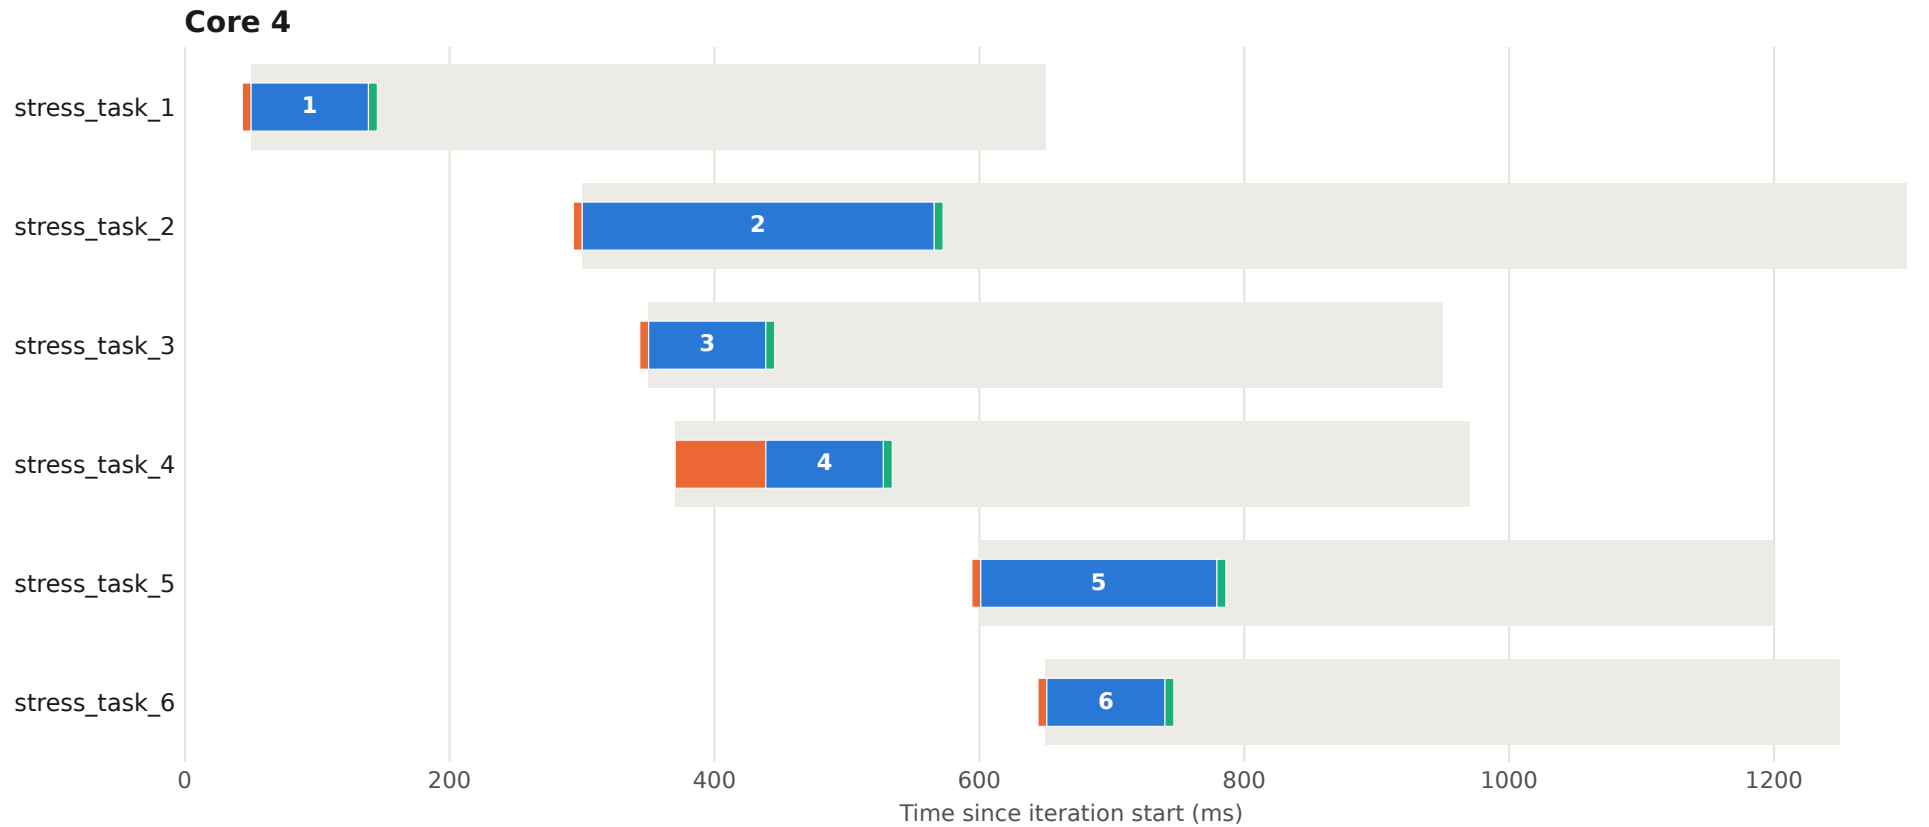


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 7 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

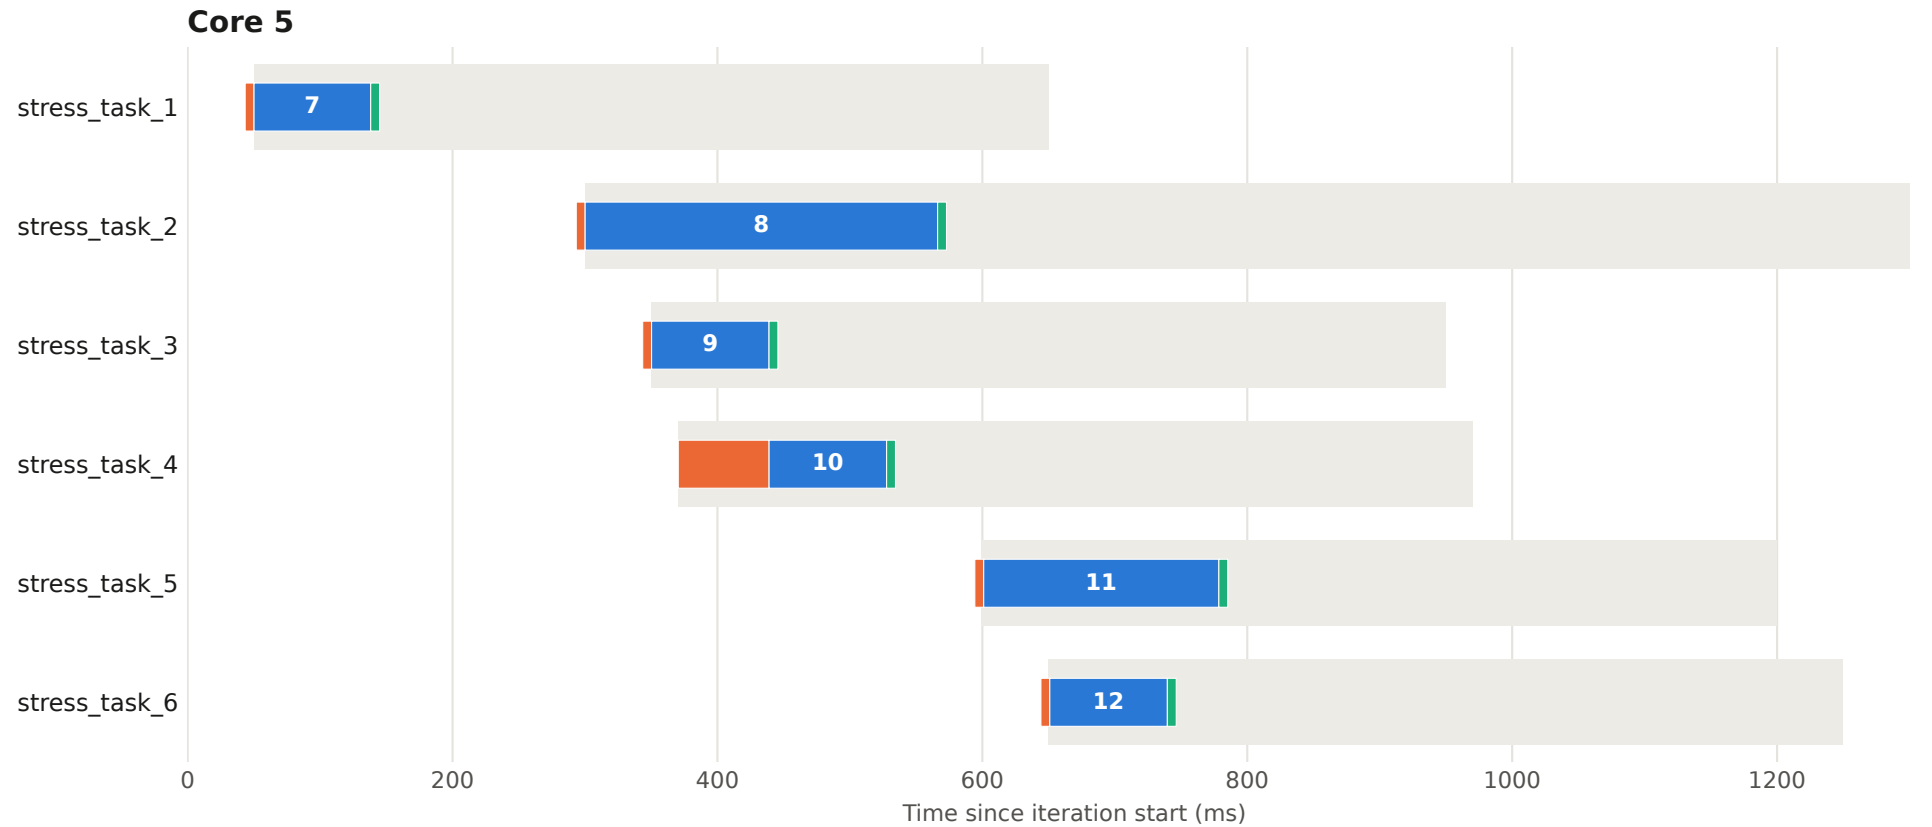


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 7 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

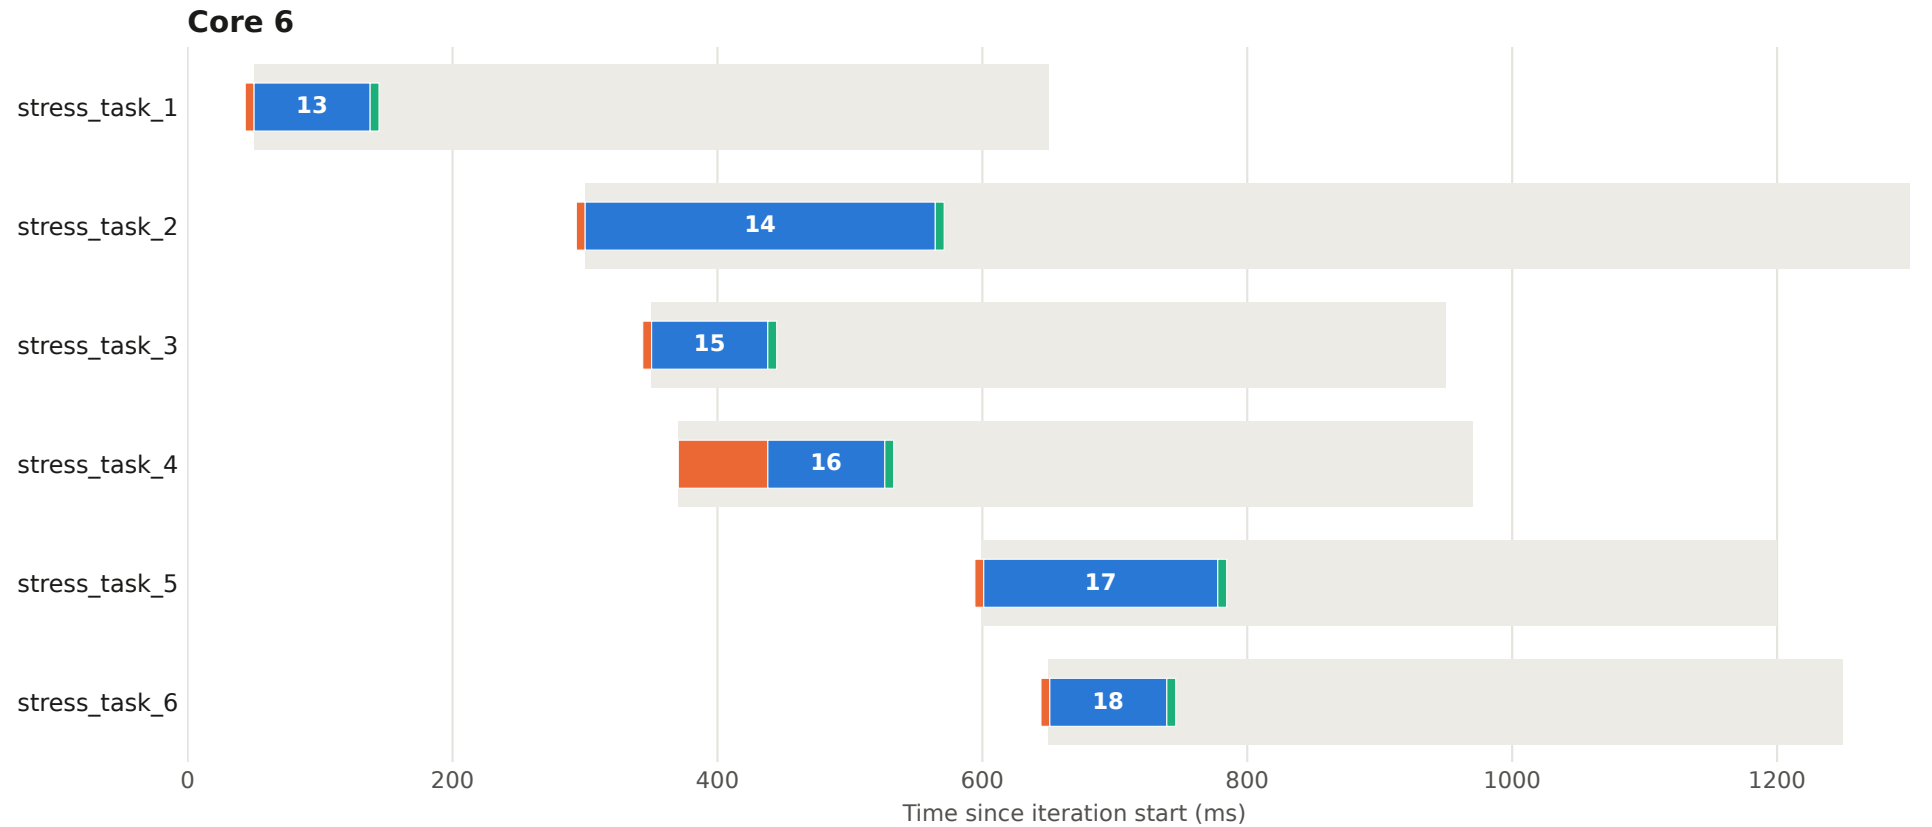


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 7 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

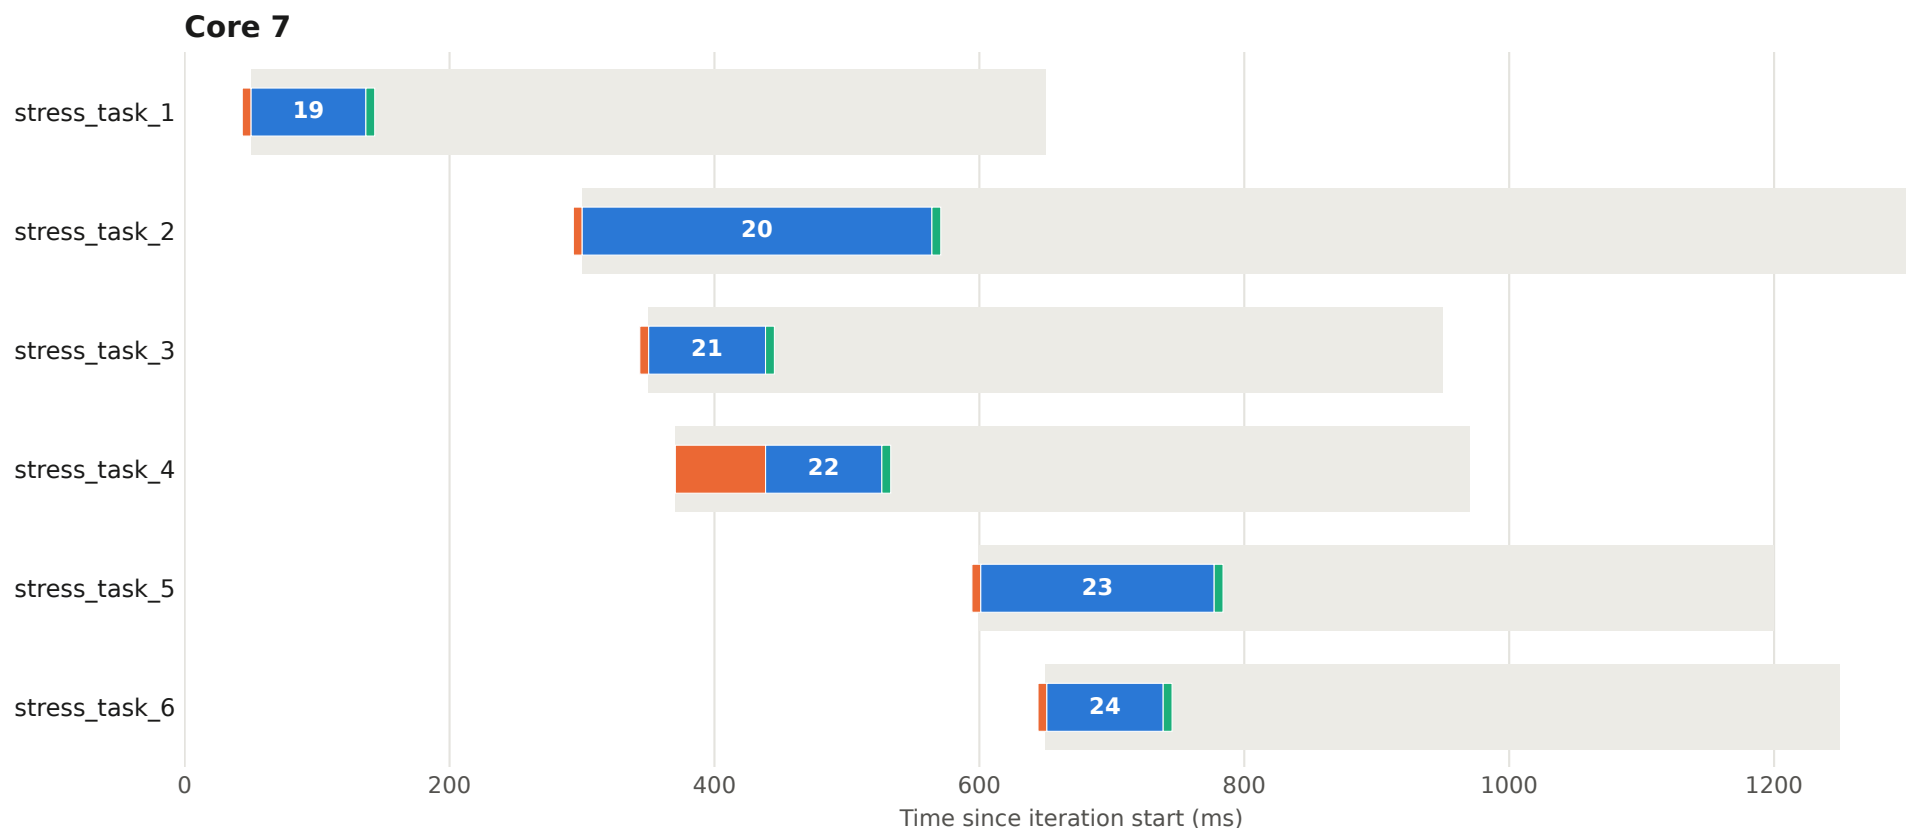


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 8 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

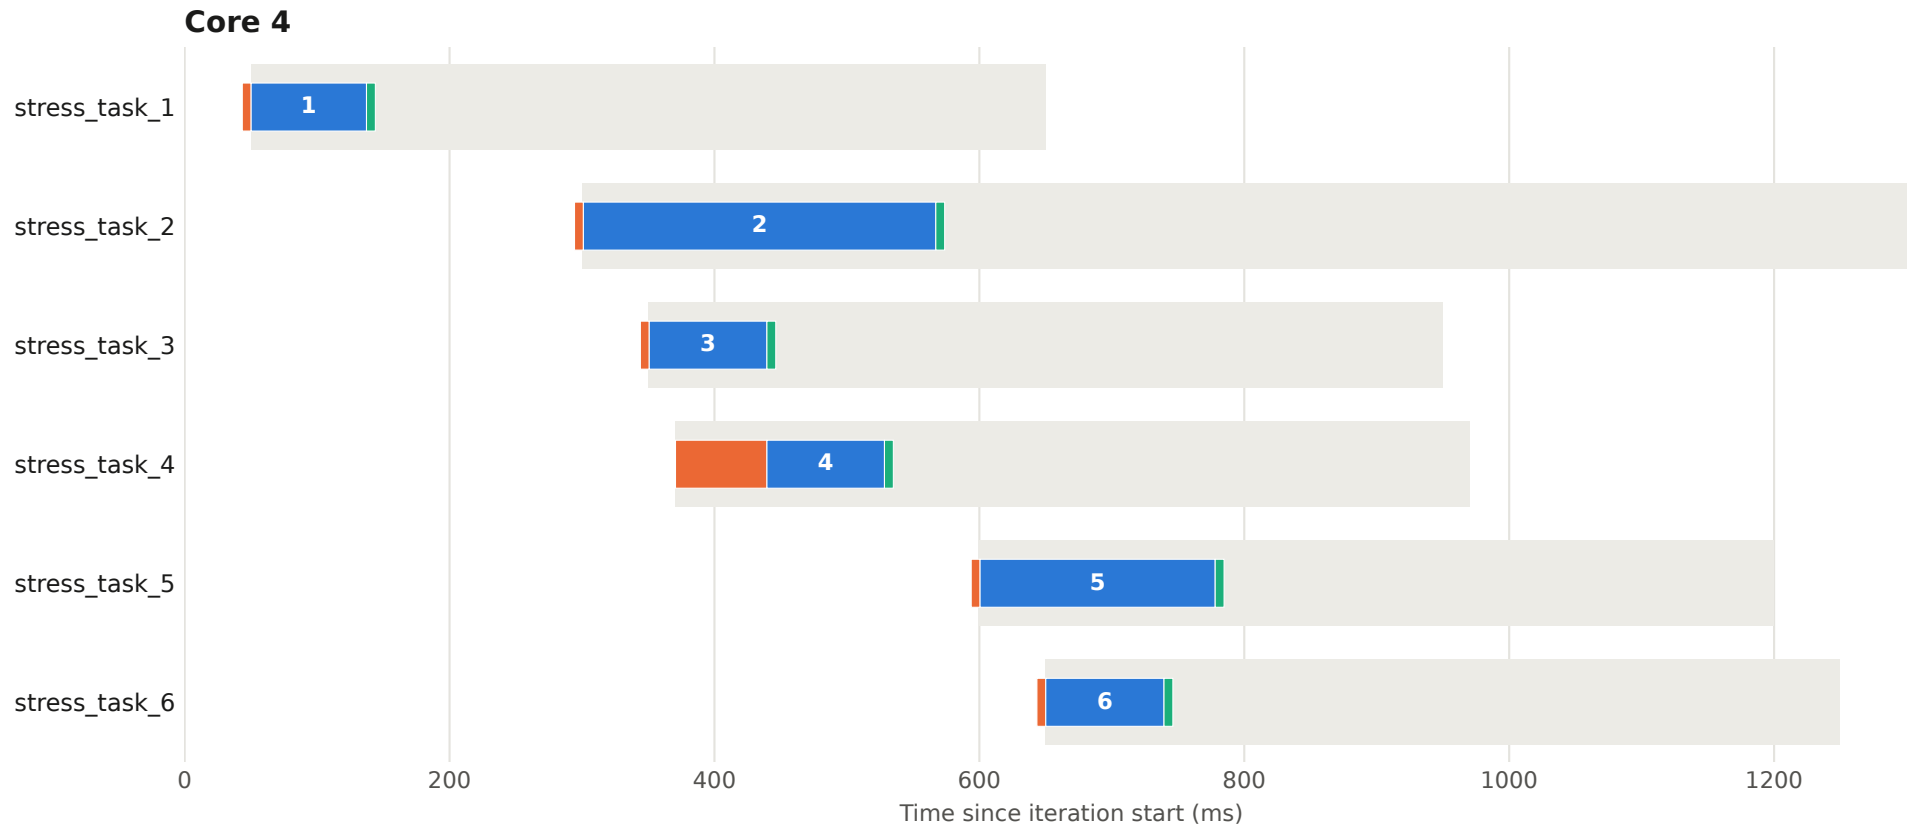


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 8 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

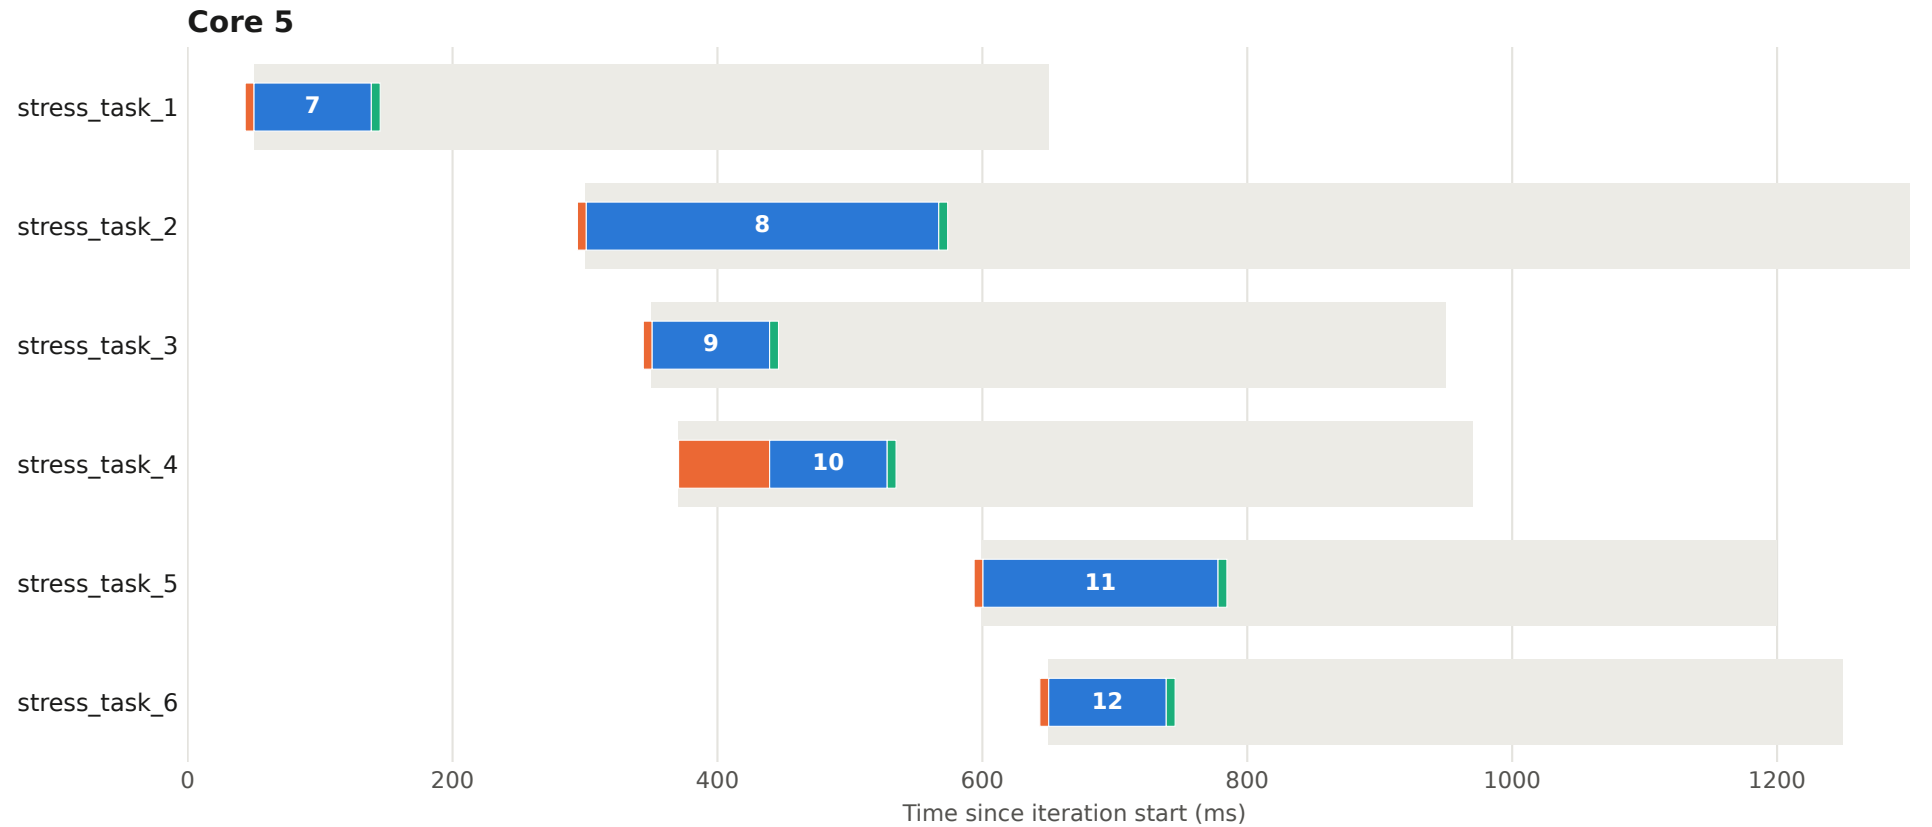


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 8 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

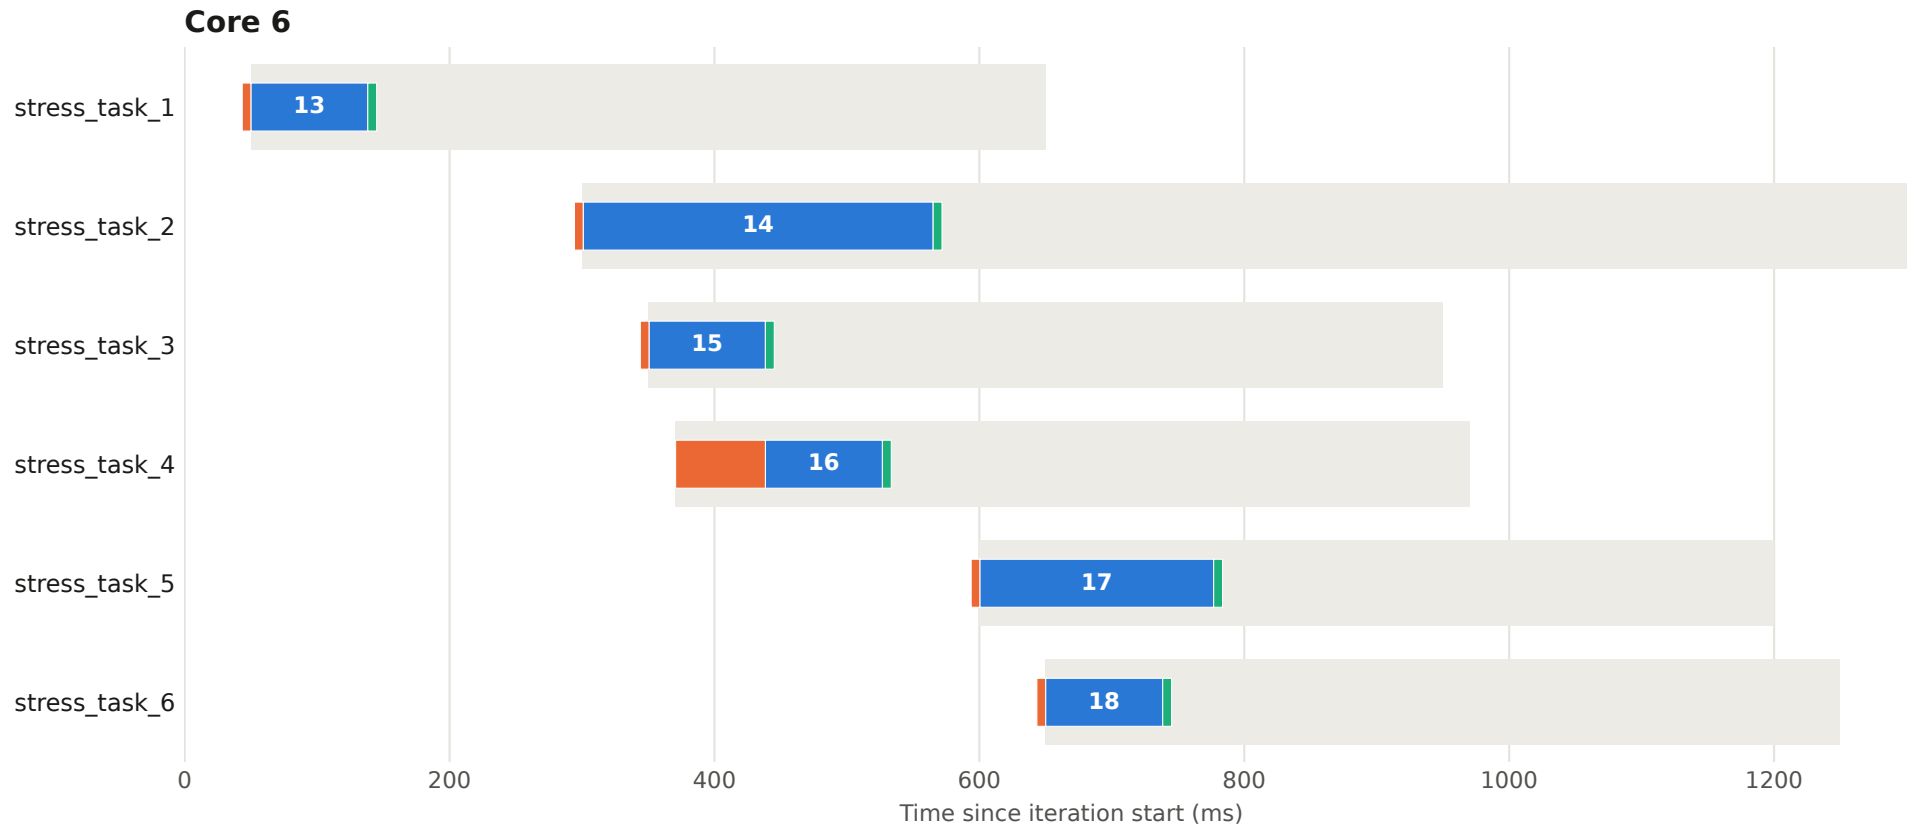


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 8 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

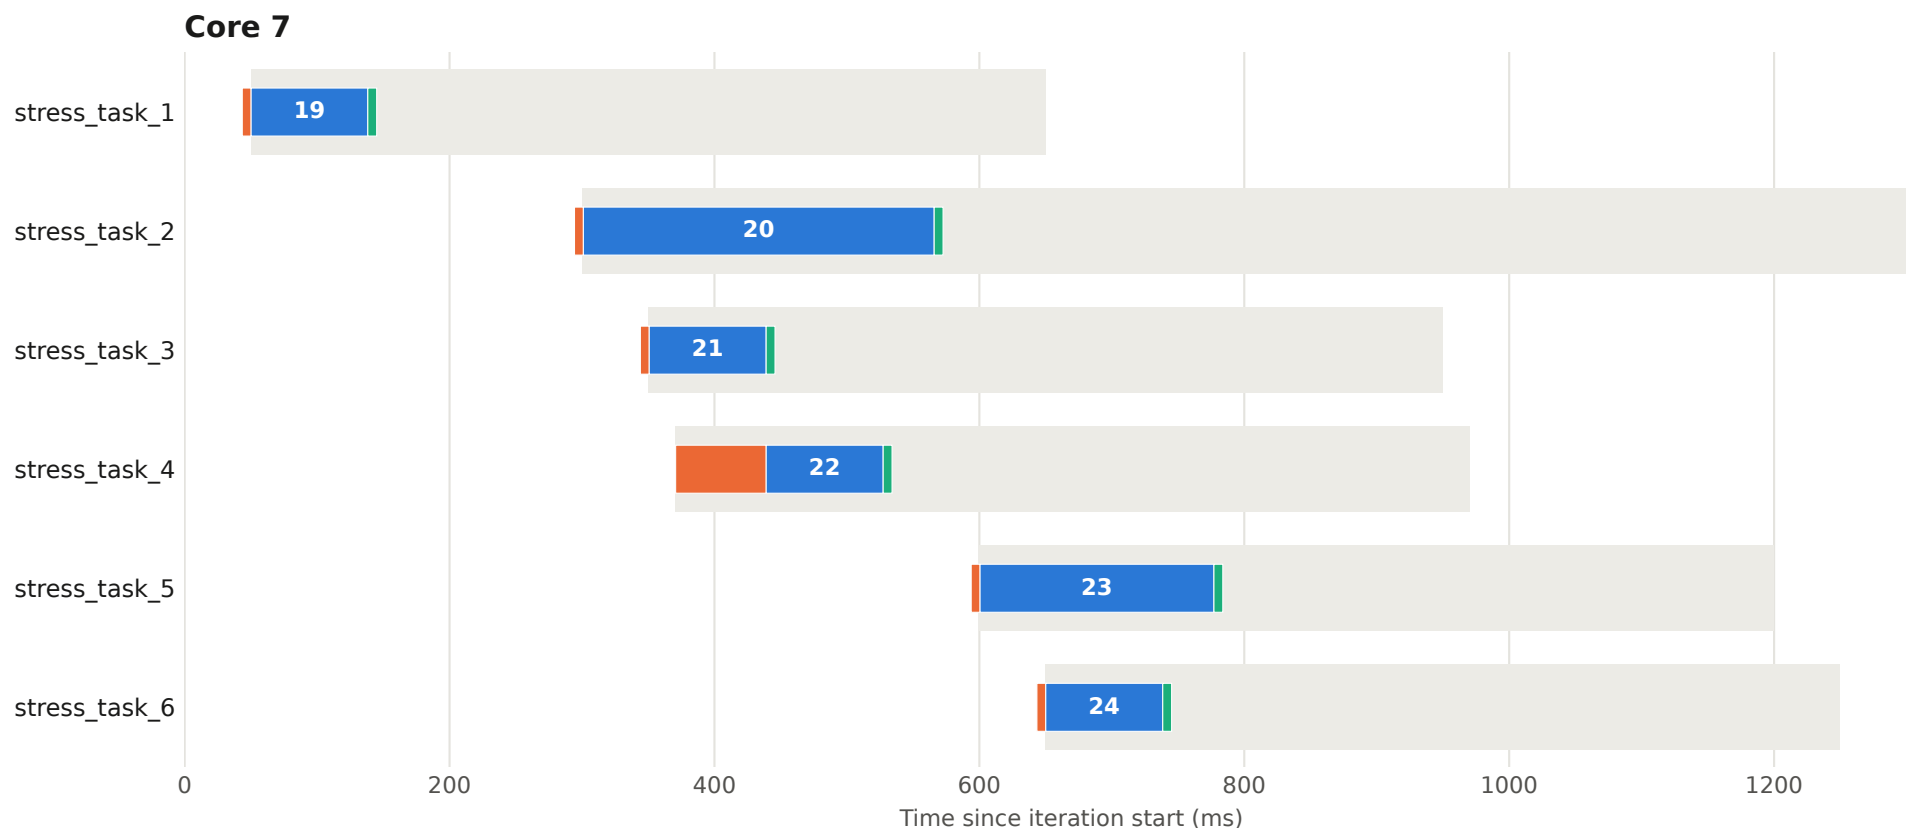


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 9 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

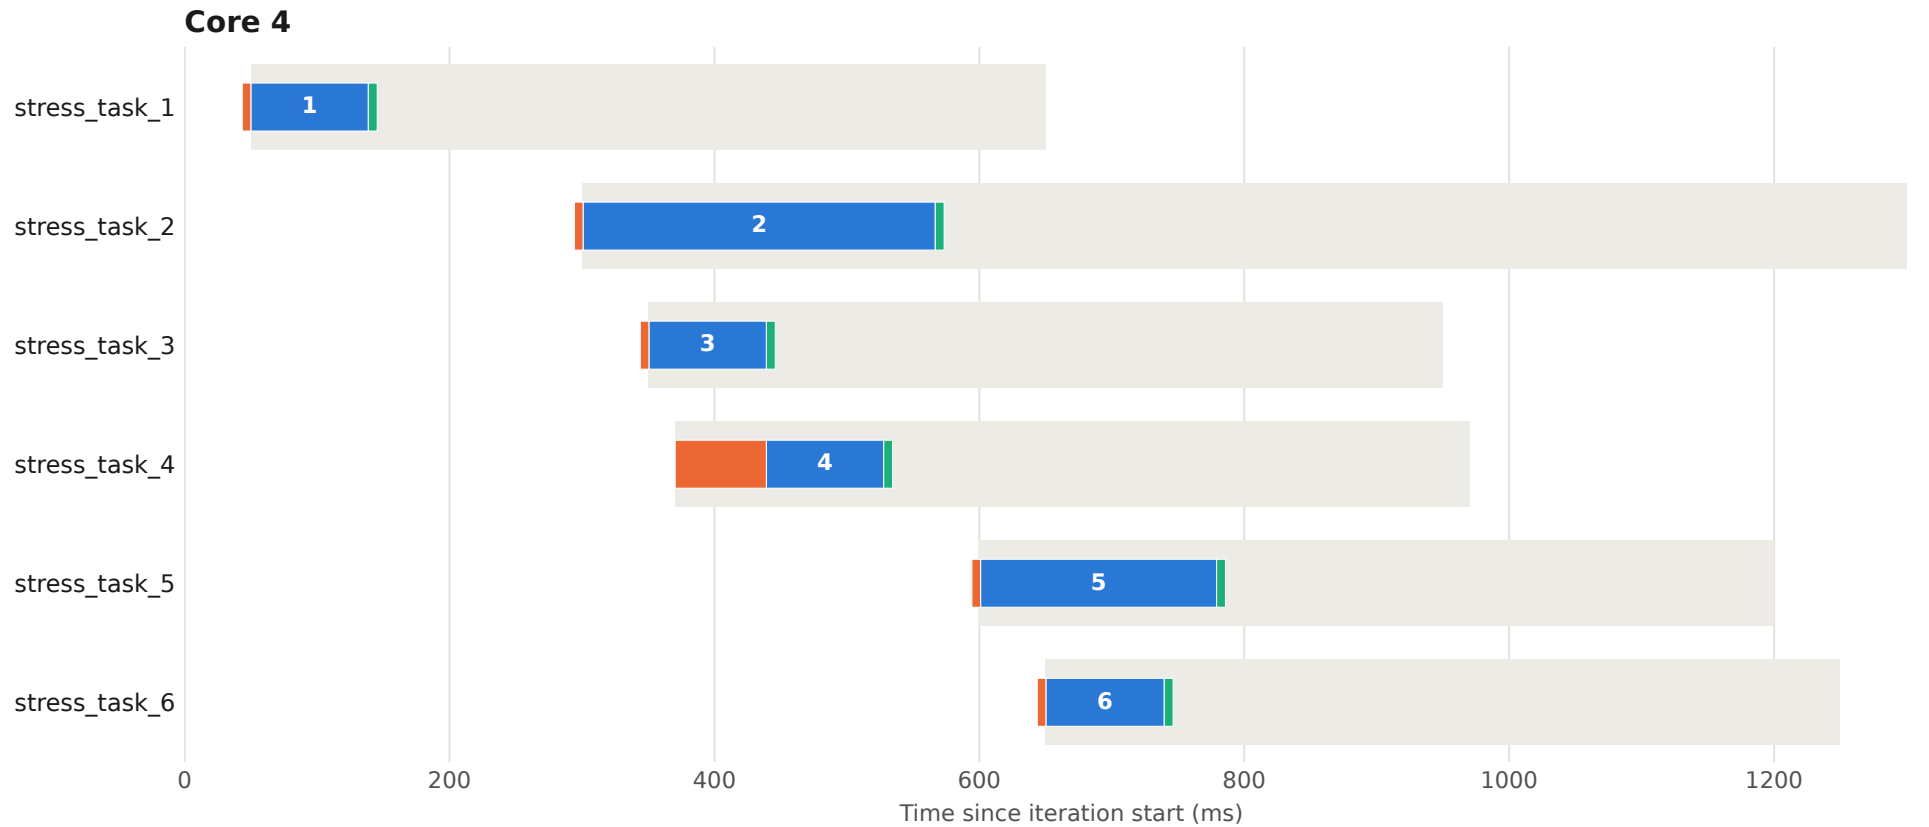


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 9 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

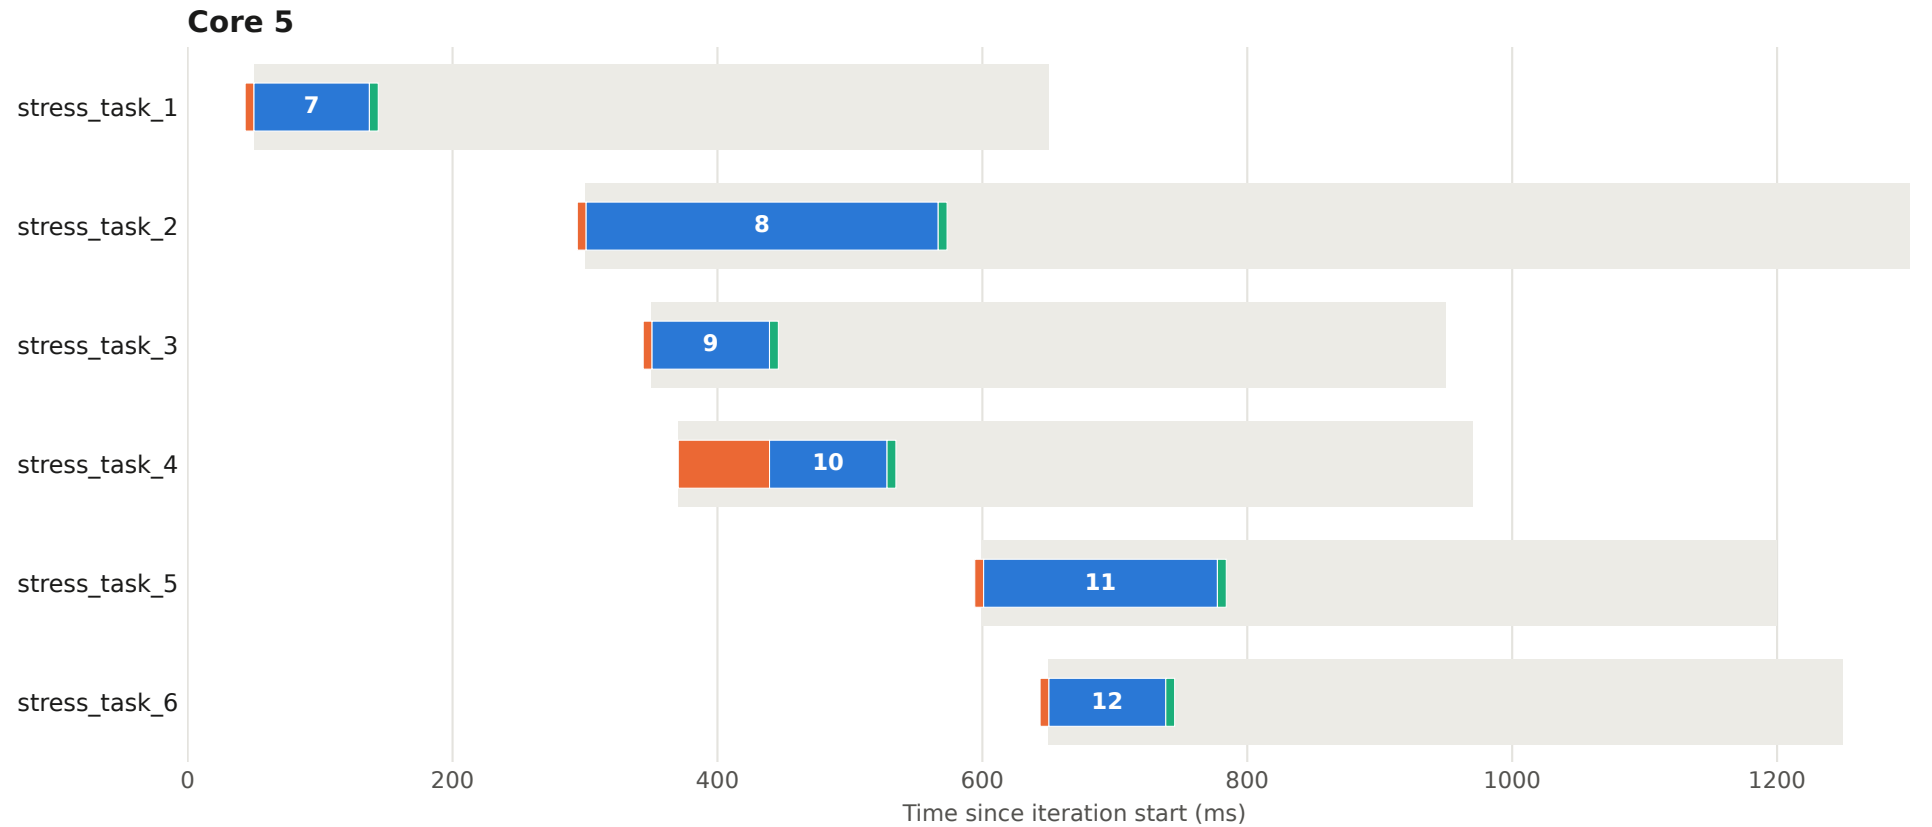


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 9 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

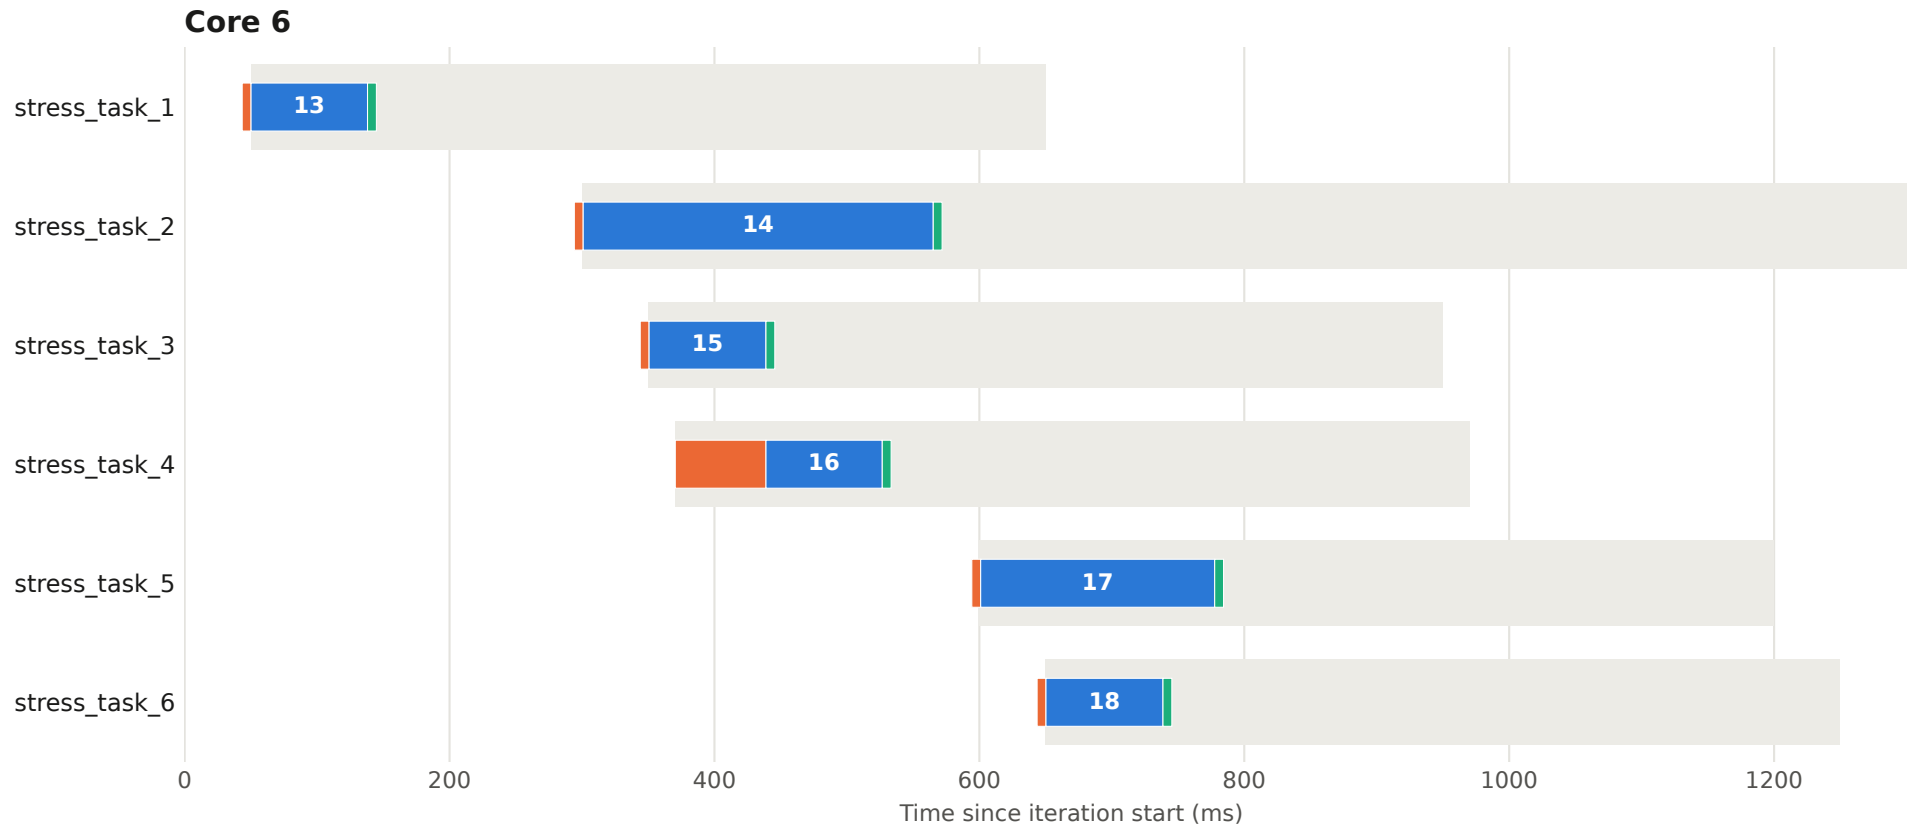


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 9 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

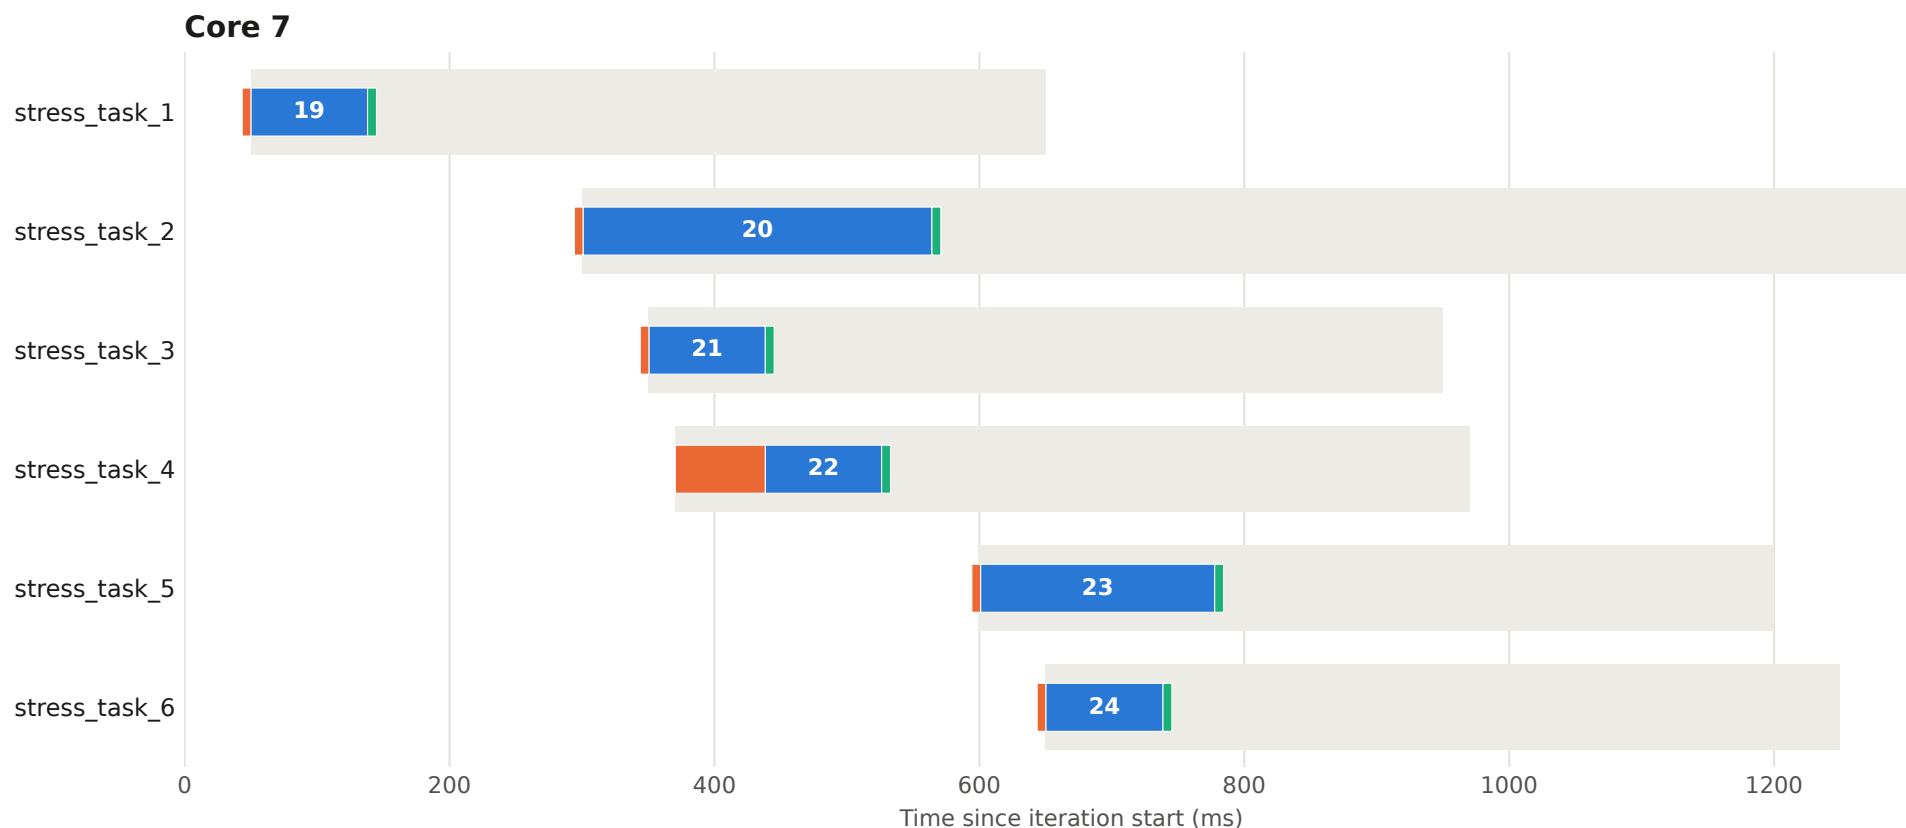


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 10 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

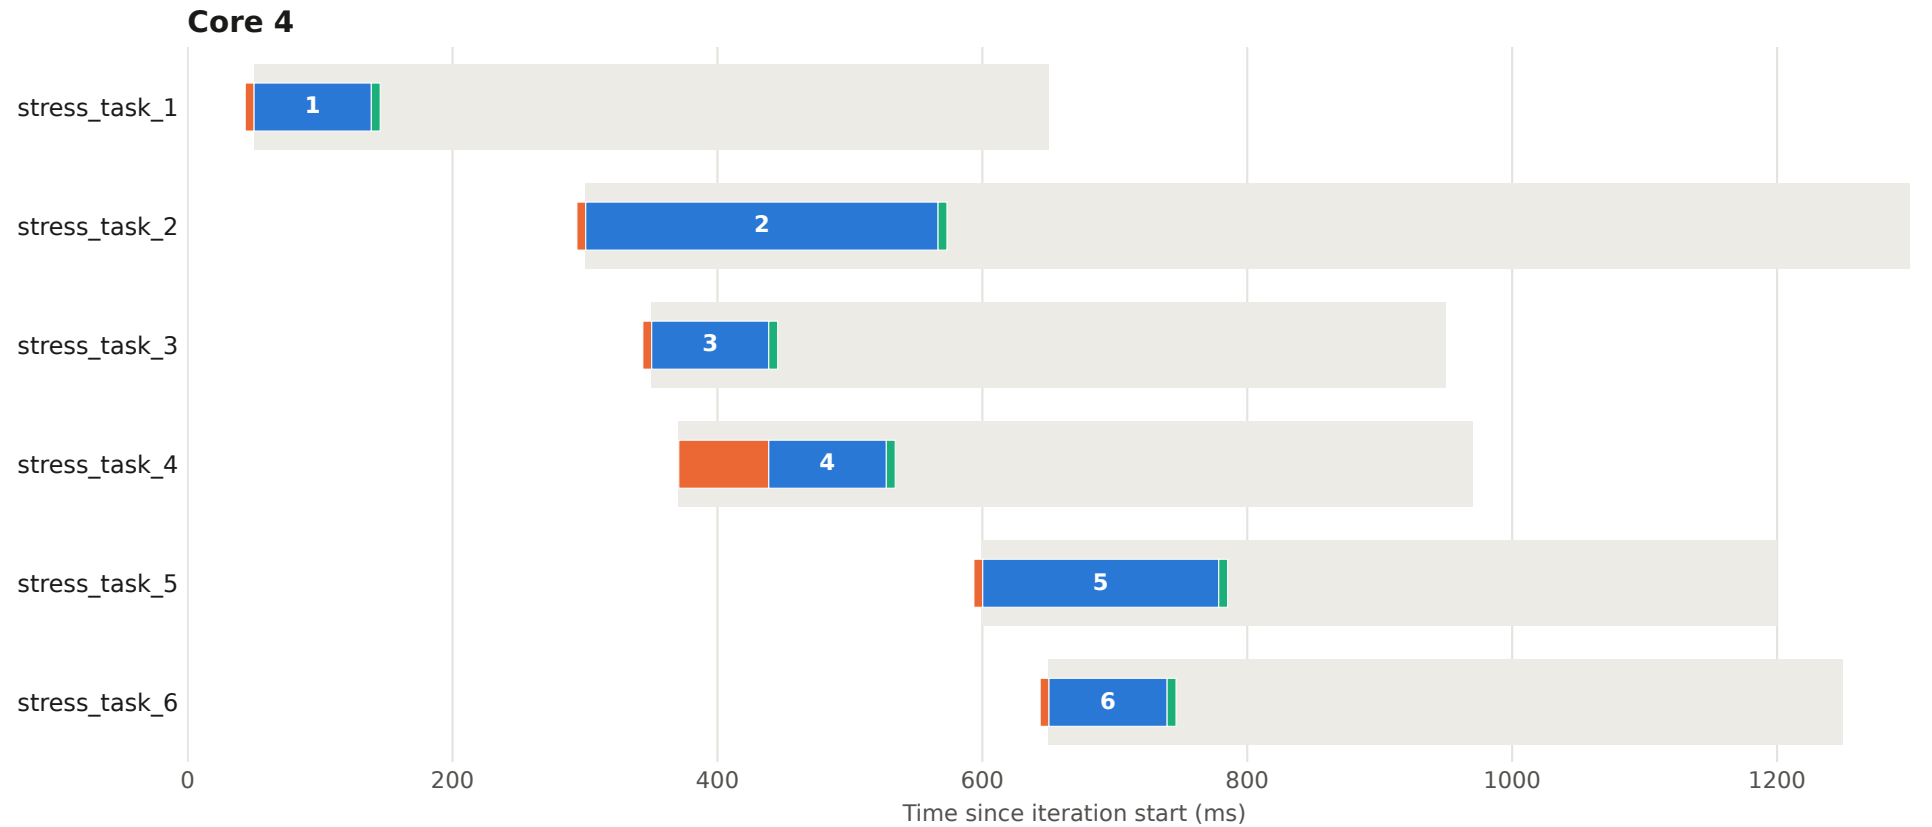


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 10 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

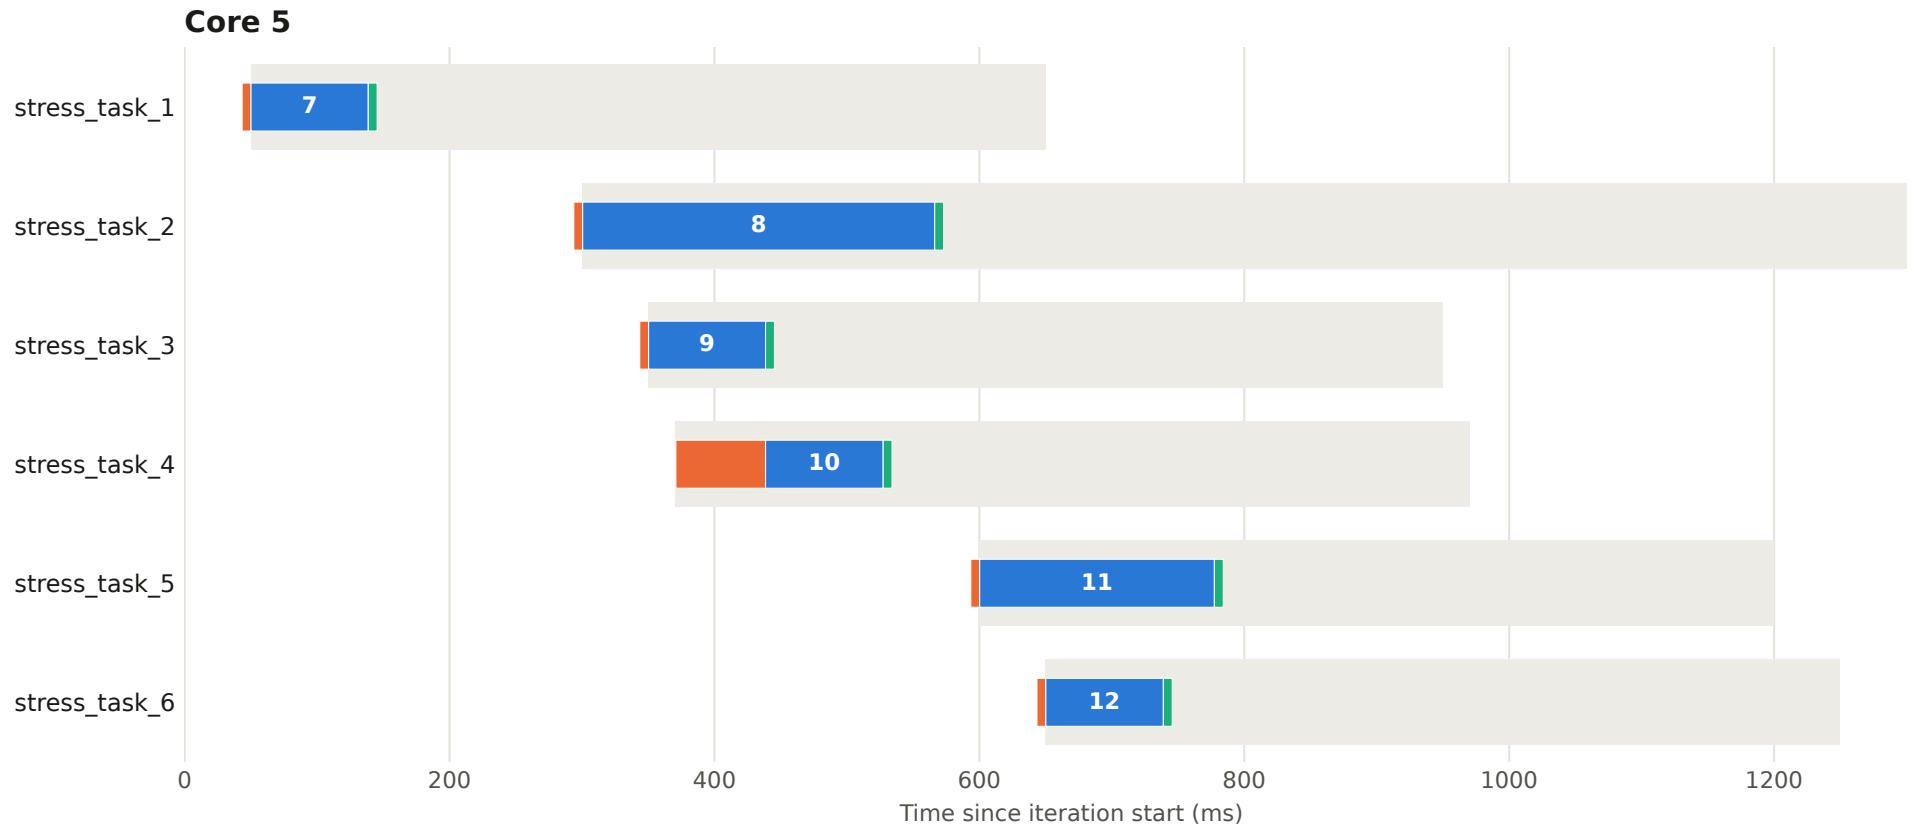


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 10 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

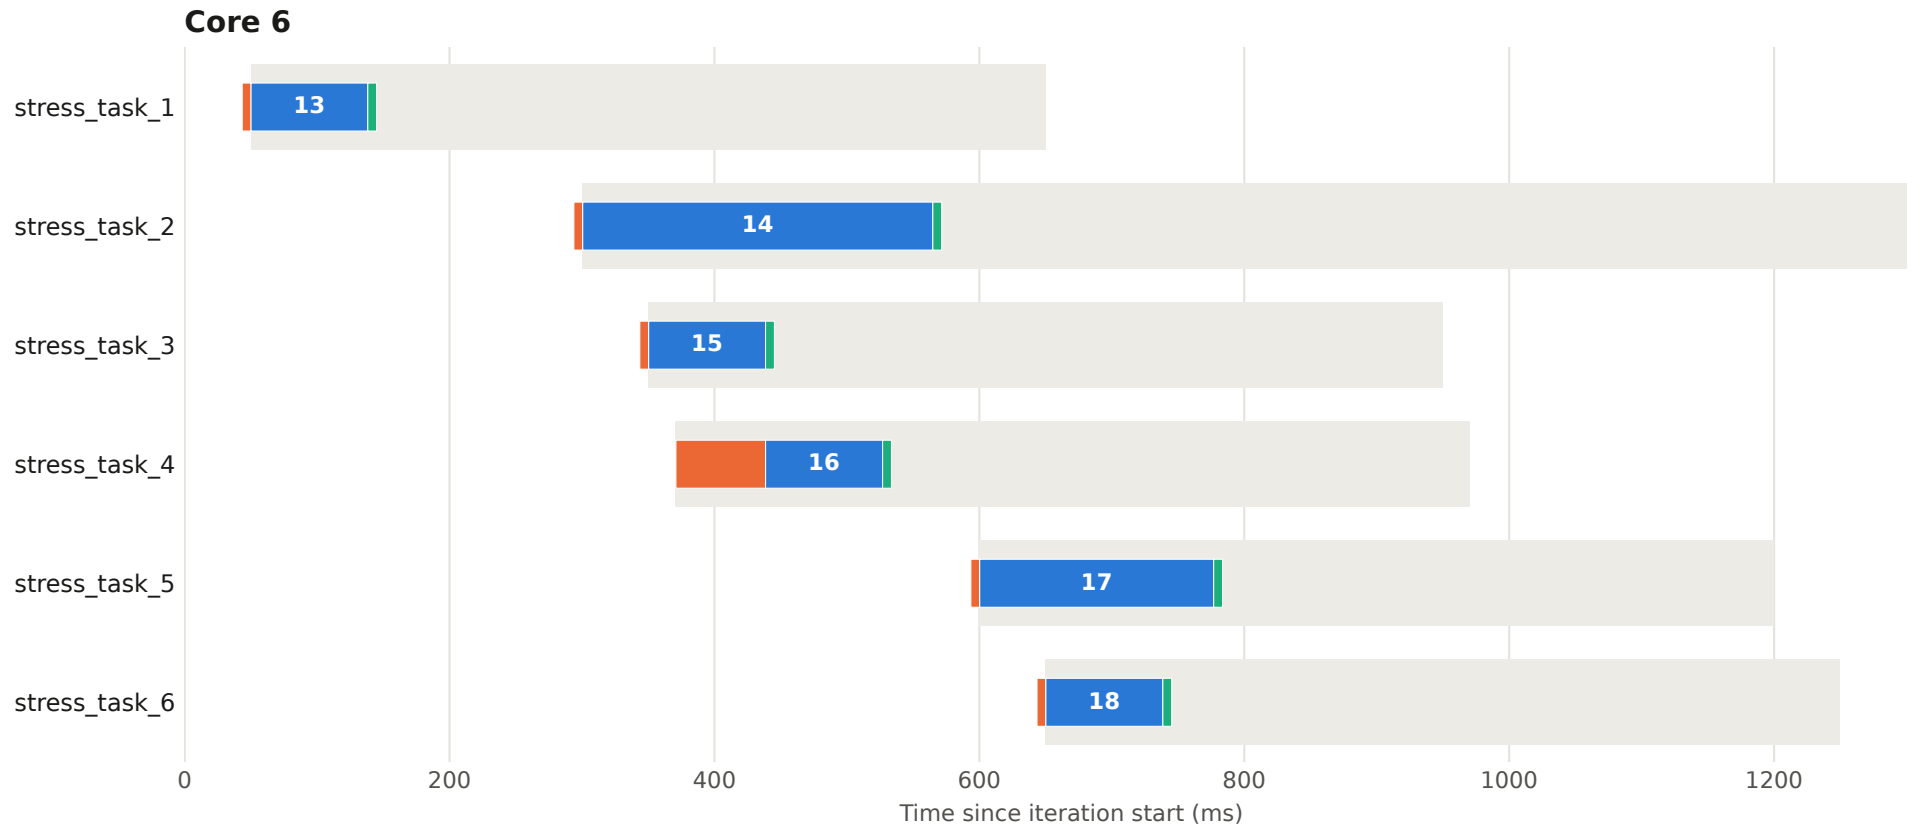


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 10 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

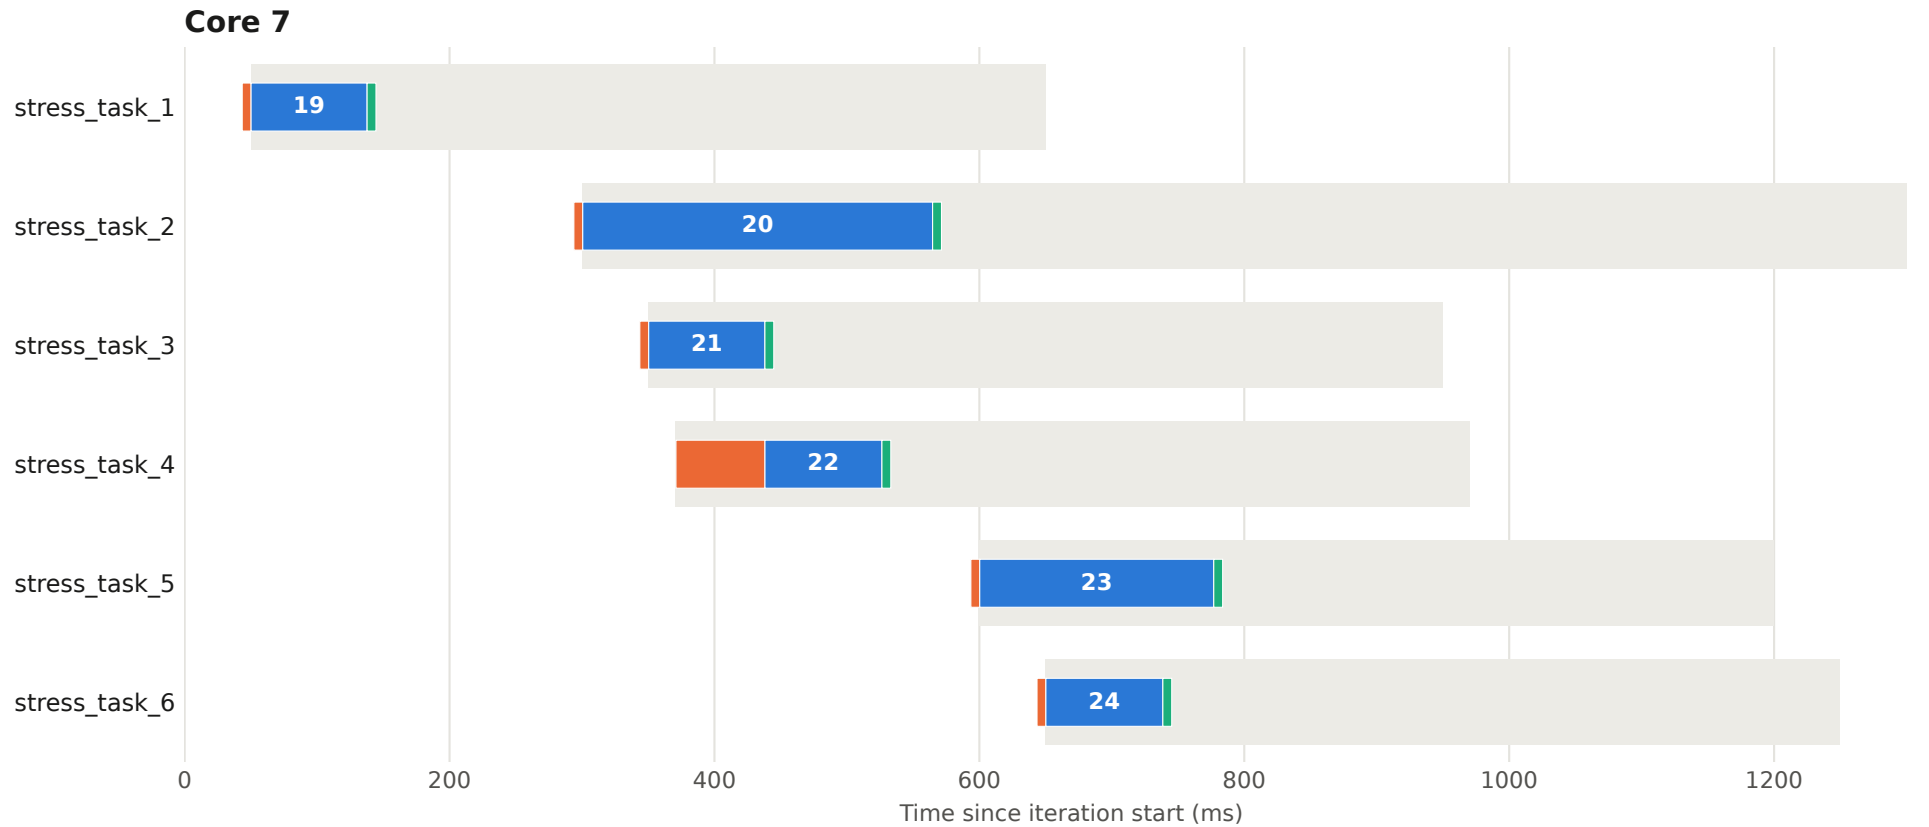


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 11 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

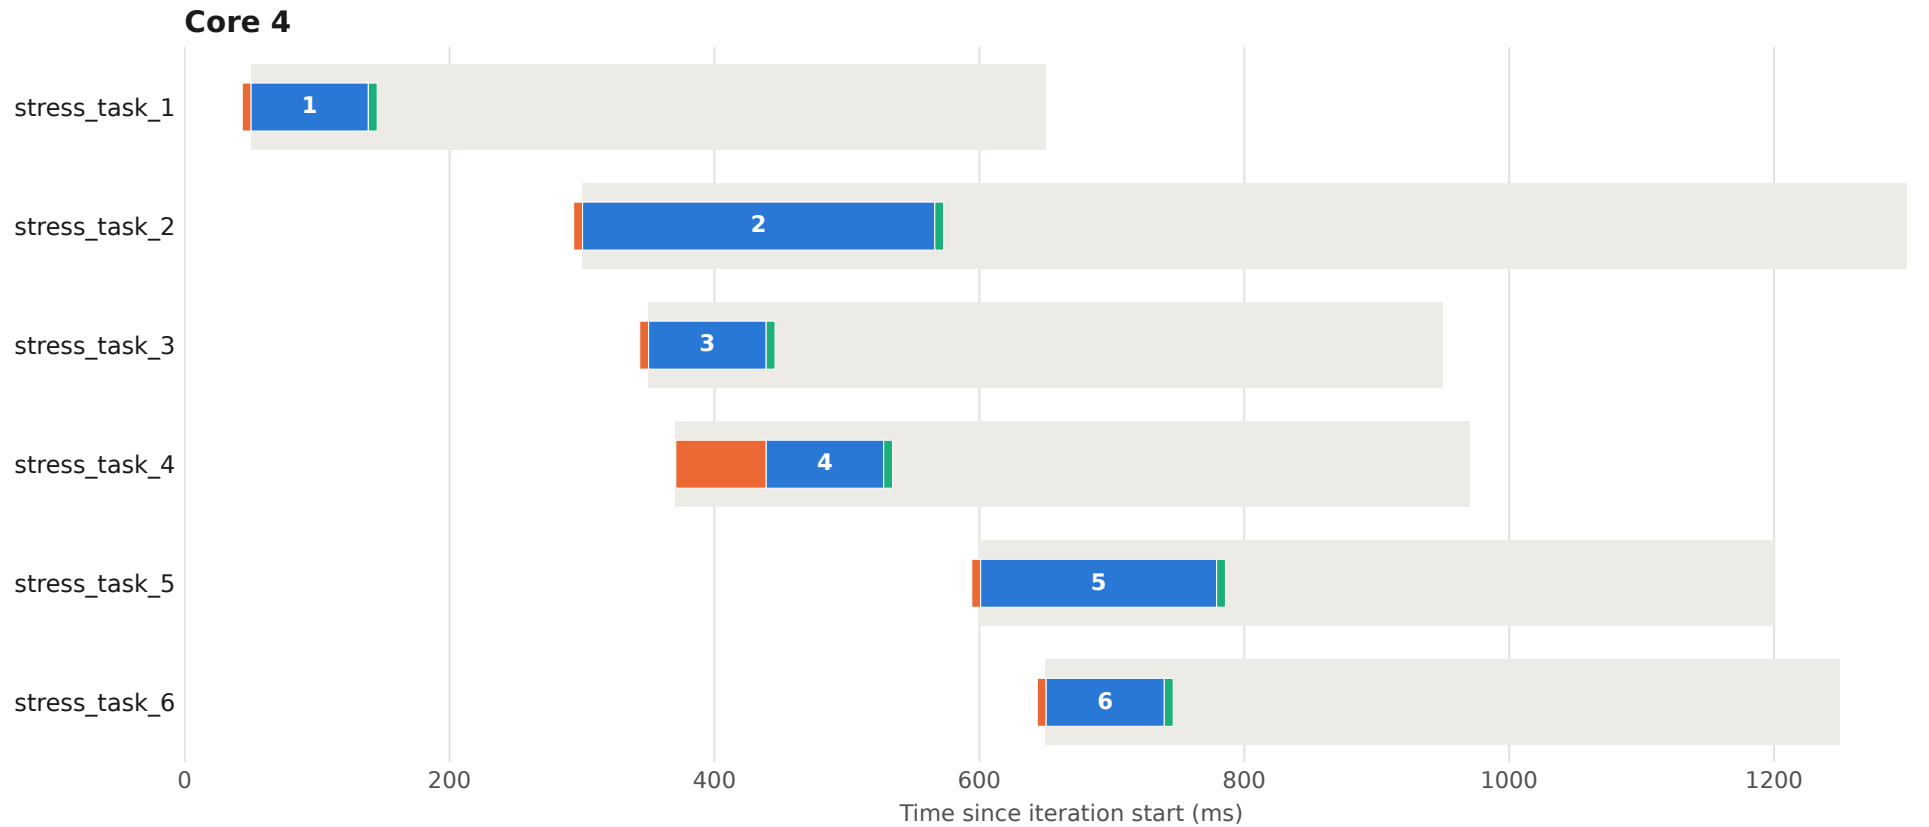


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 11 - core 5

One chart per core; each bar is one task call.


- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

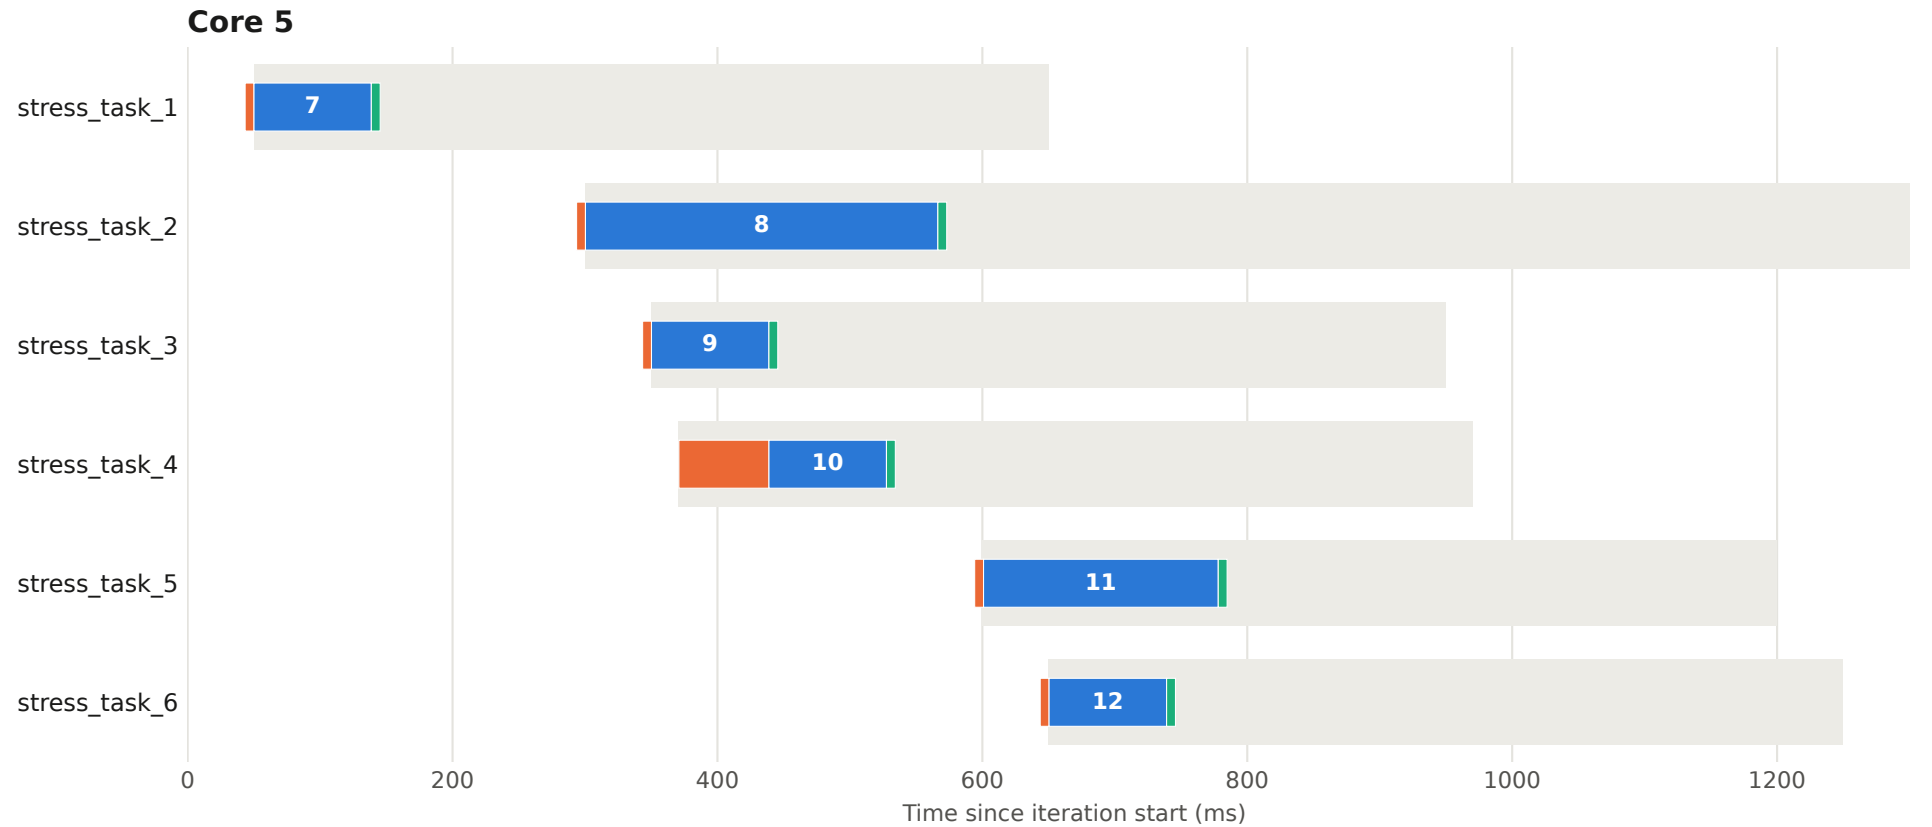

# Execution plan - iteration 11 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

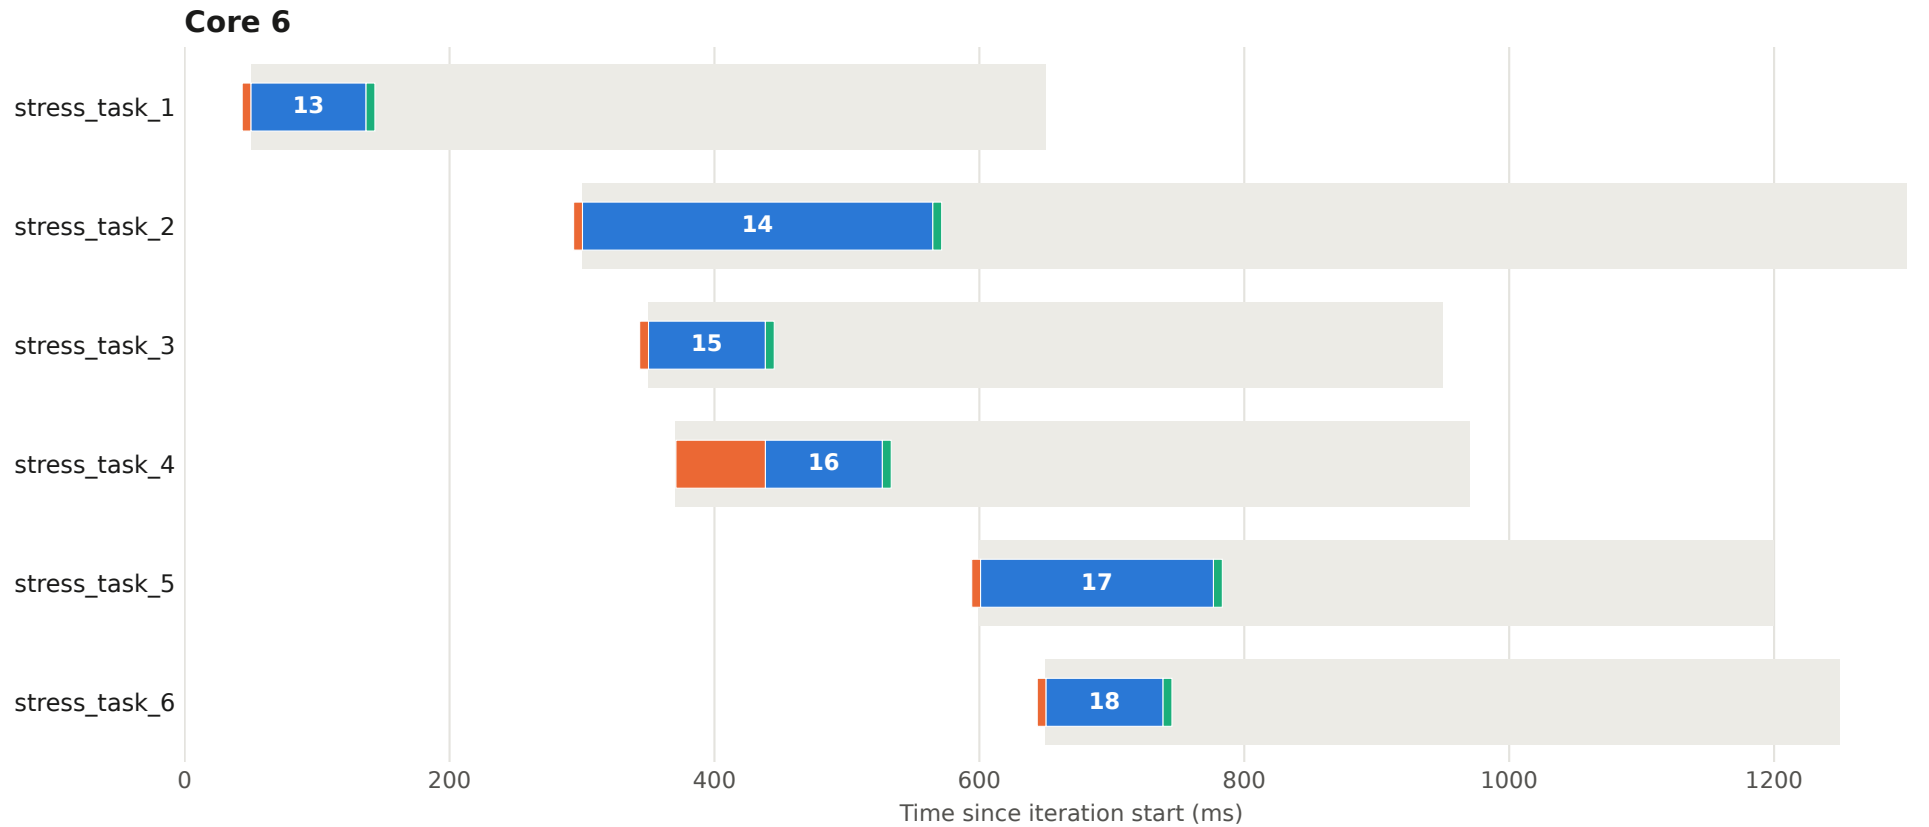


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 11 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

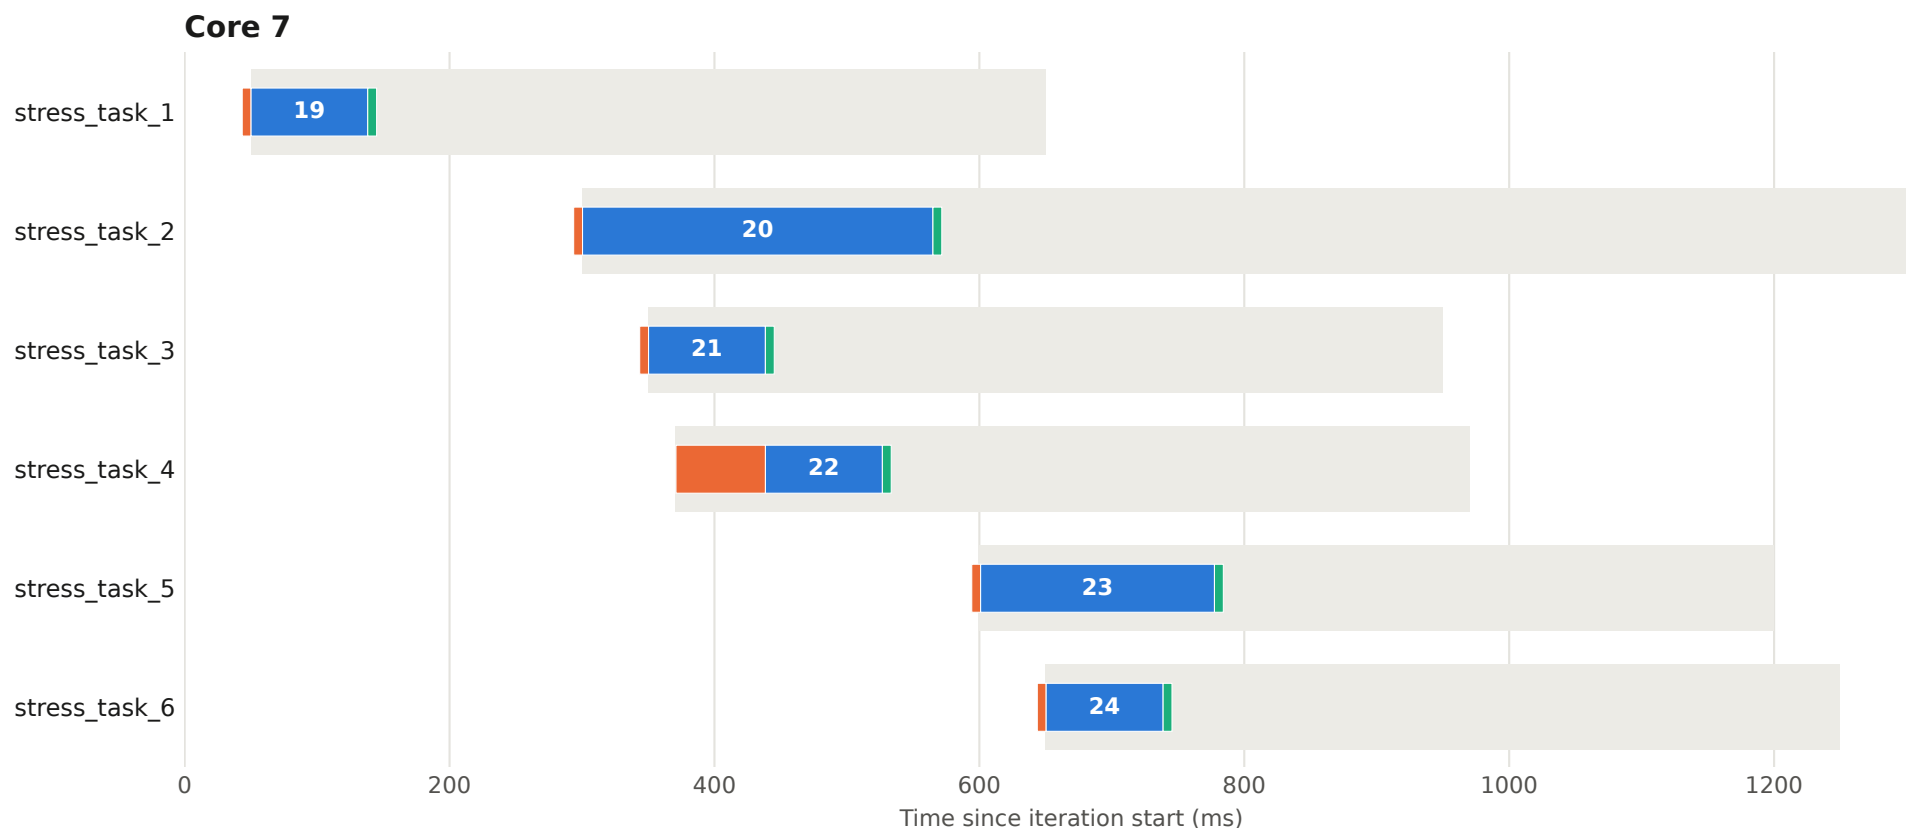


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 12 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

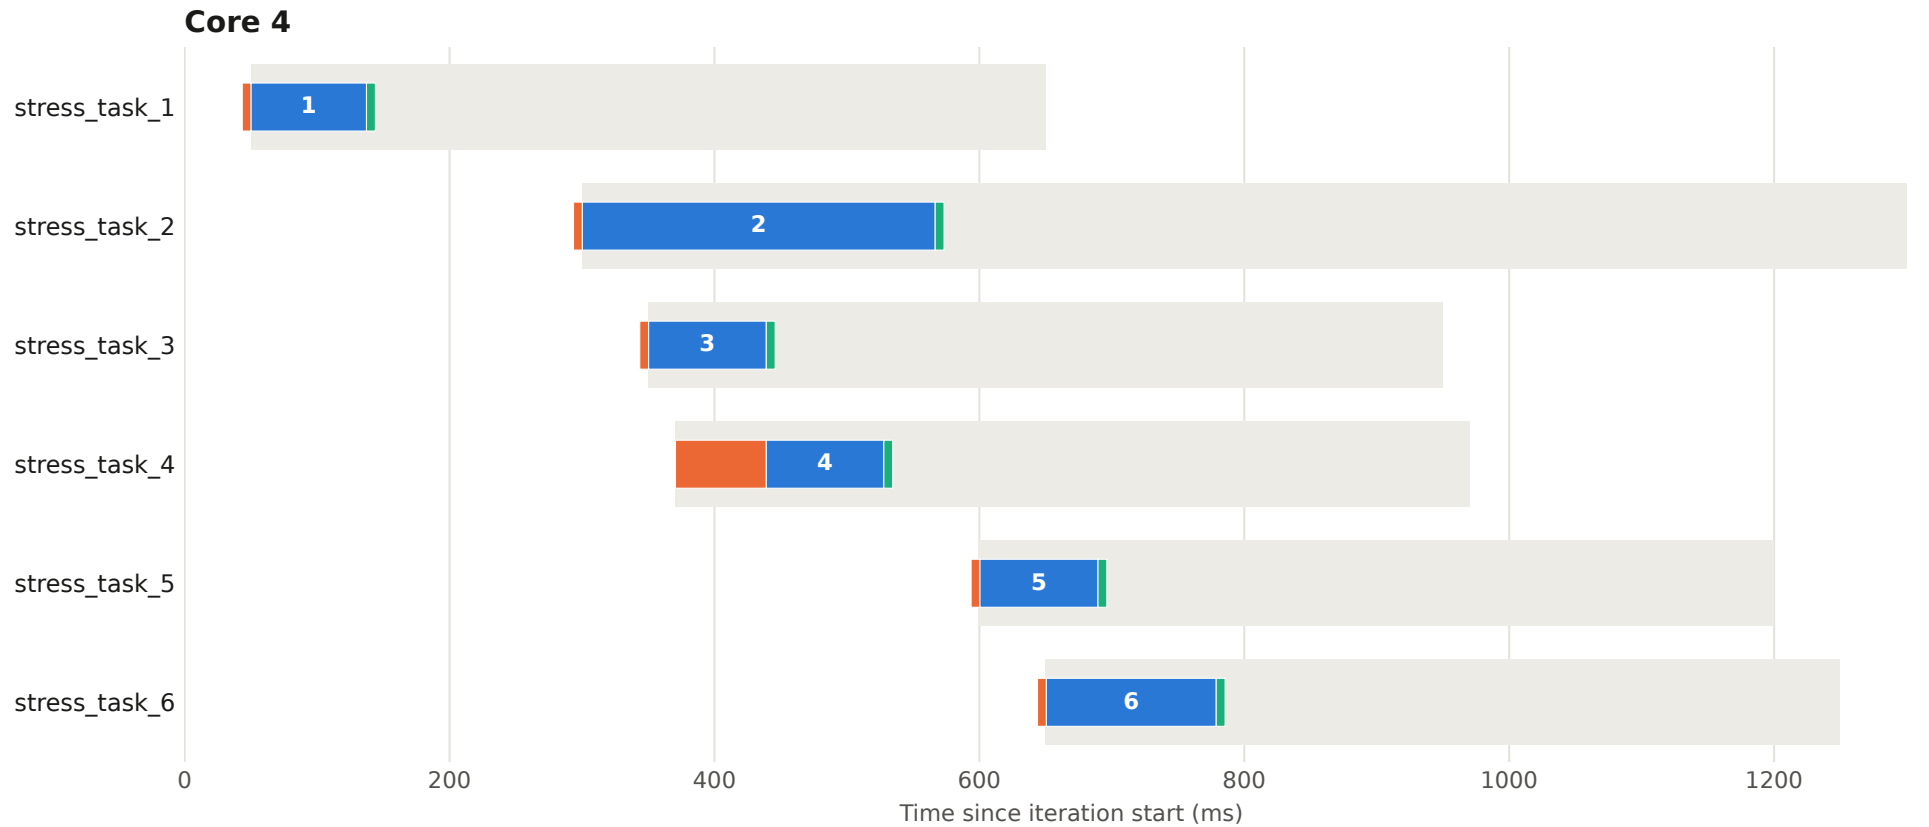


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 12 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

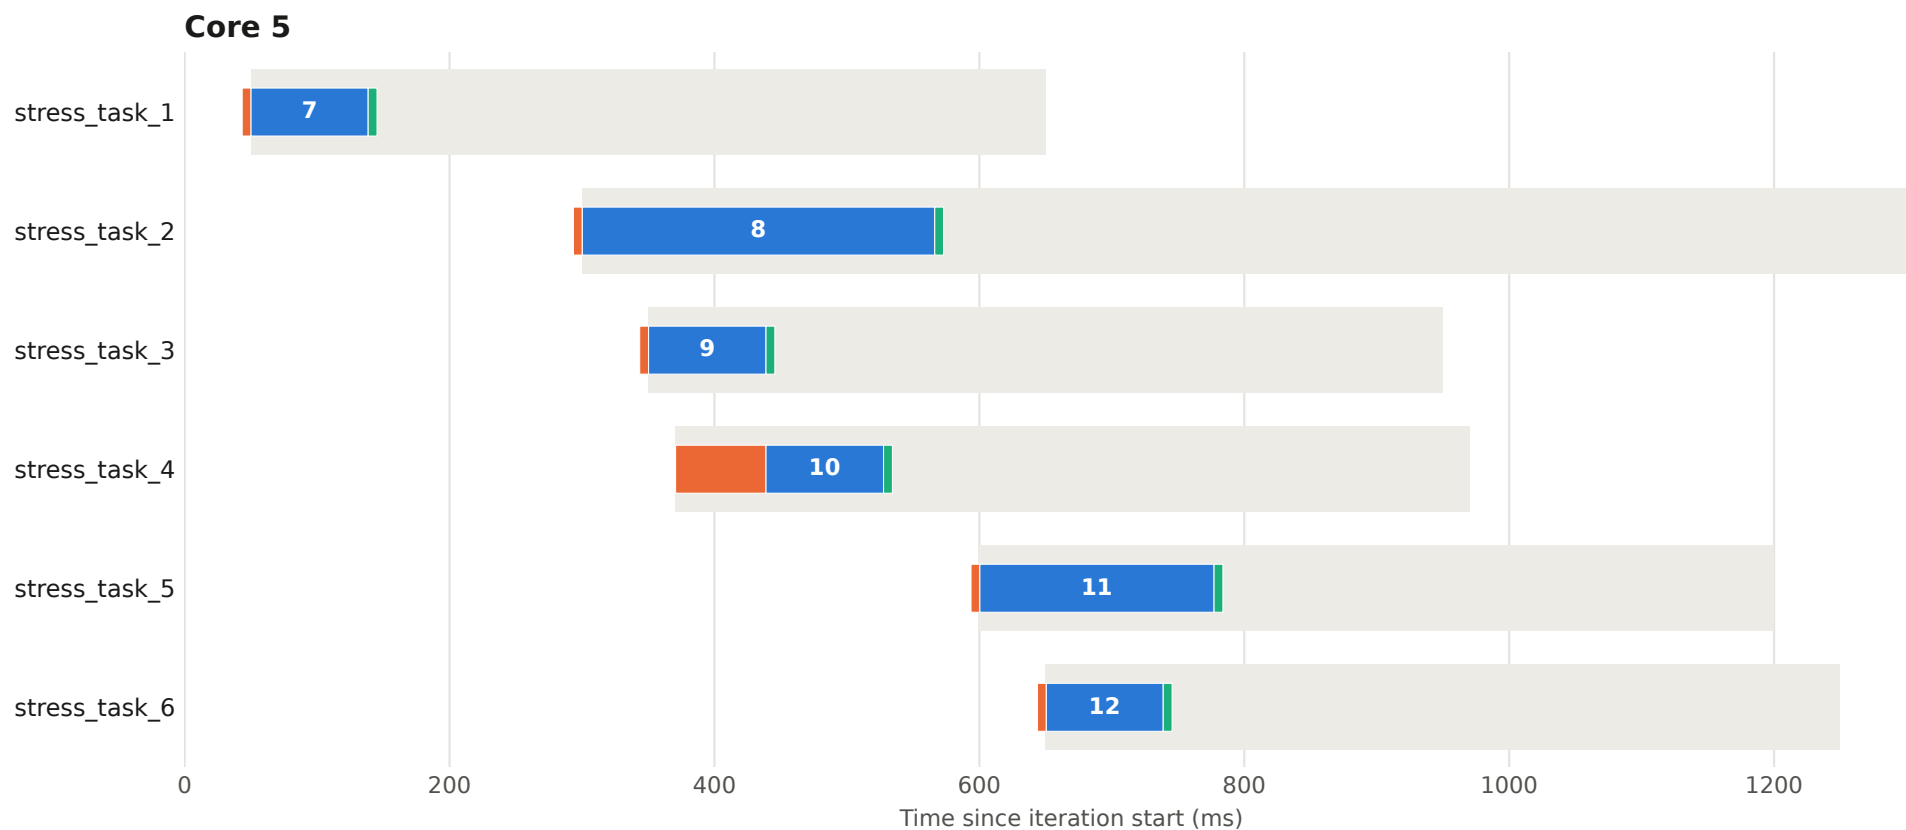


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 12 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

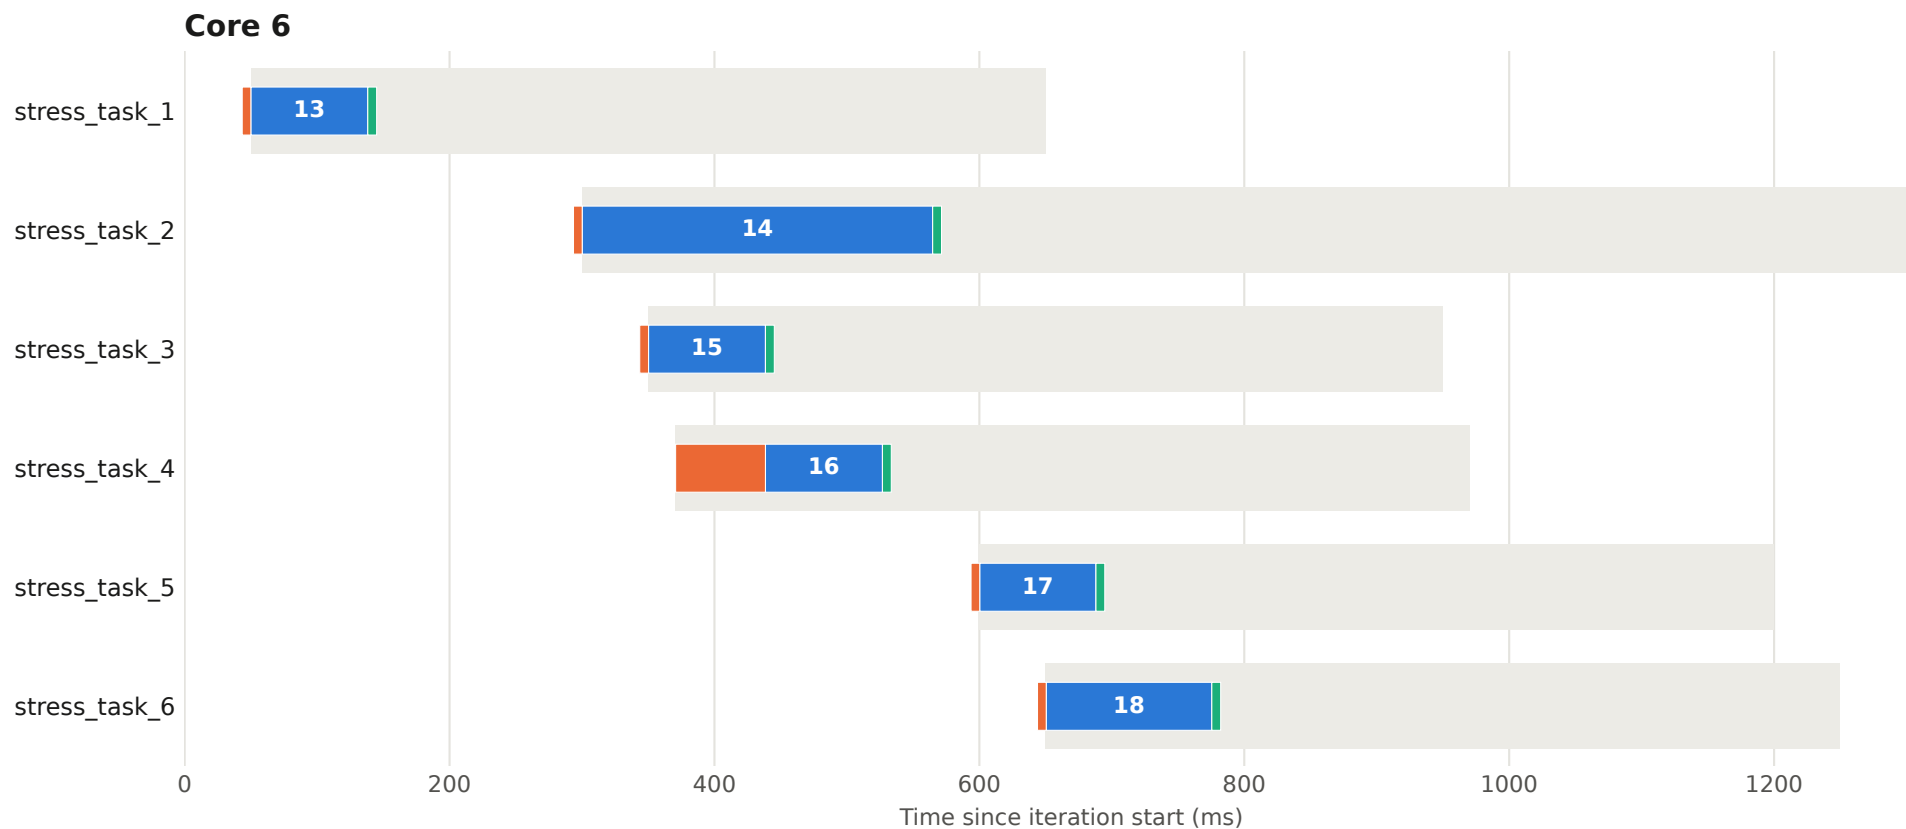


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 12 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

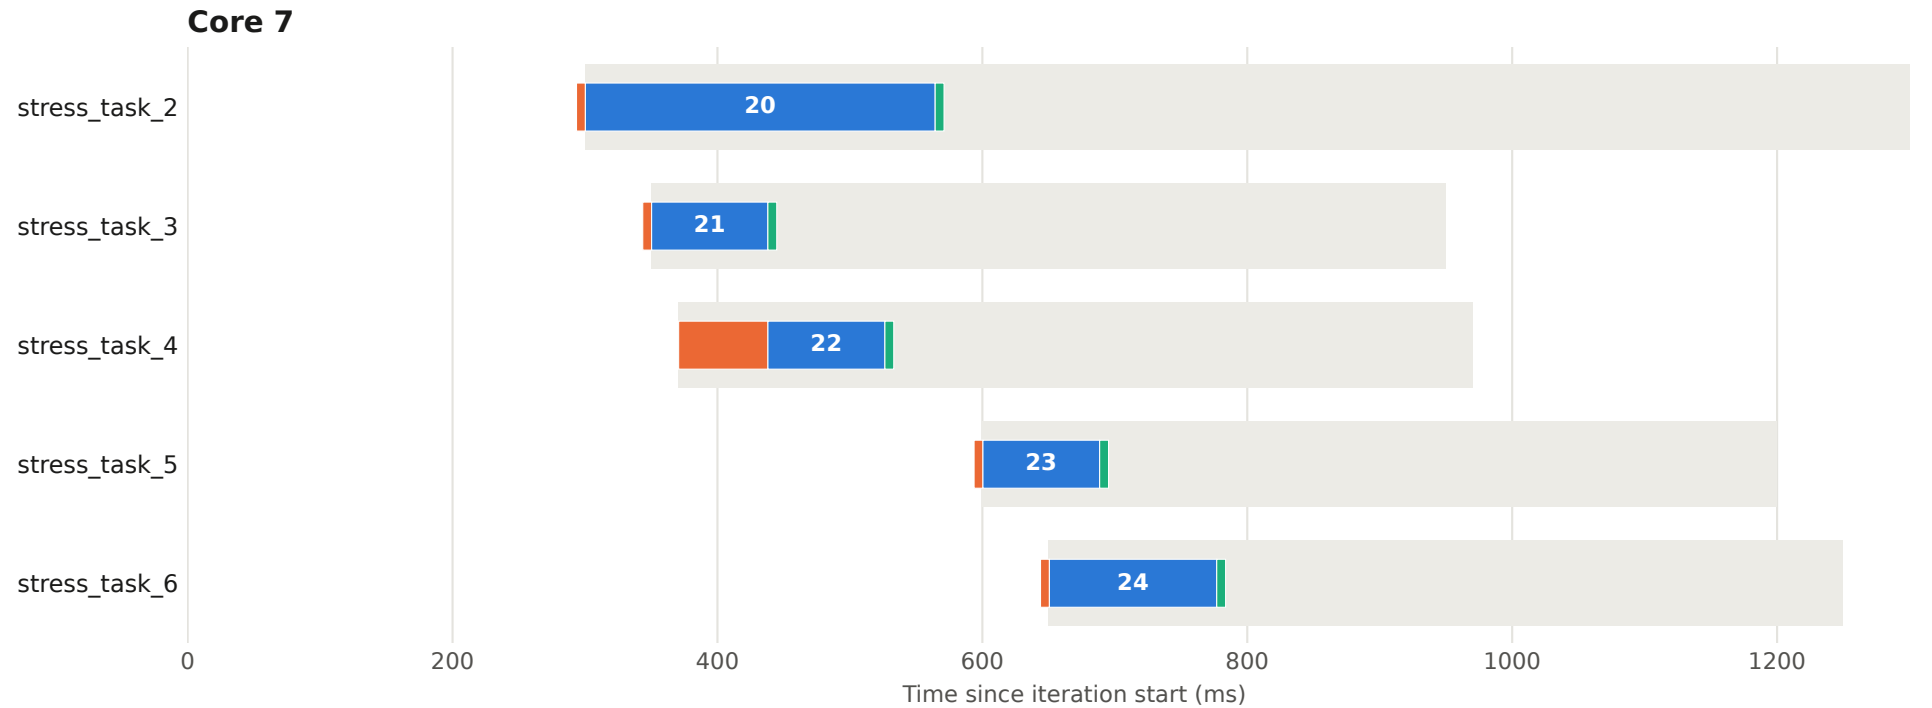


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 12 - core 72026

One chart per core; each bar is one task call.


- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

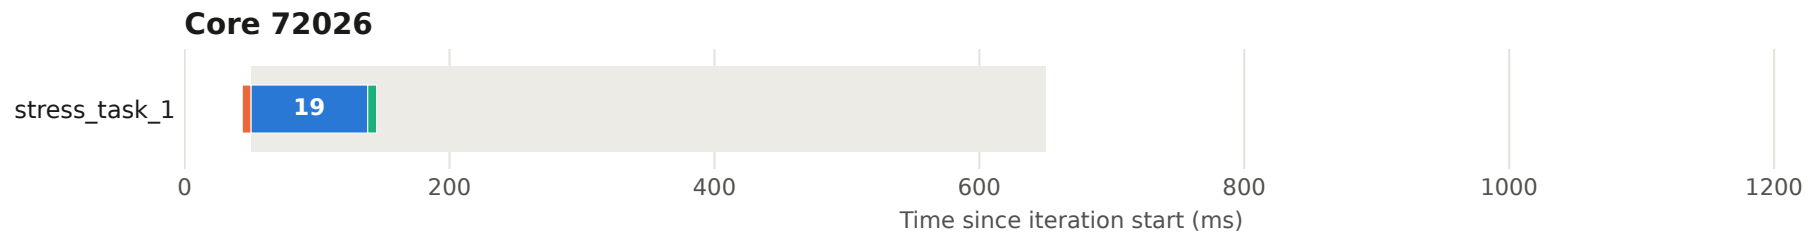

# Execution plan - iteration 13 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

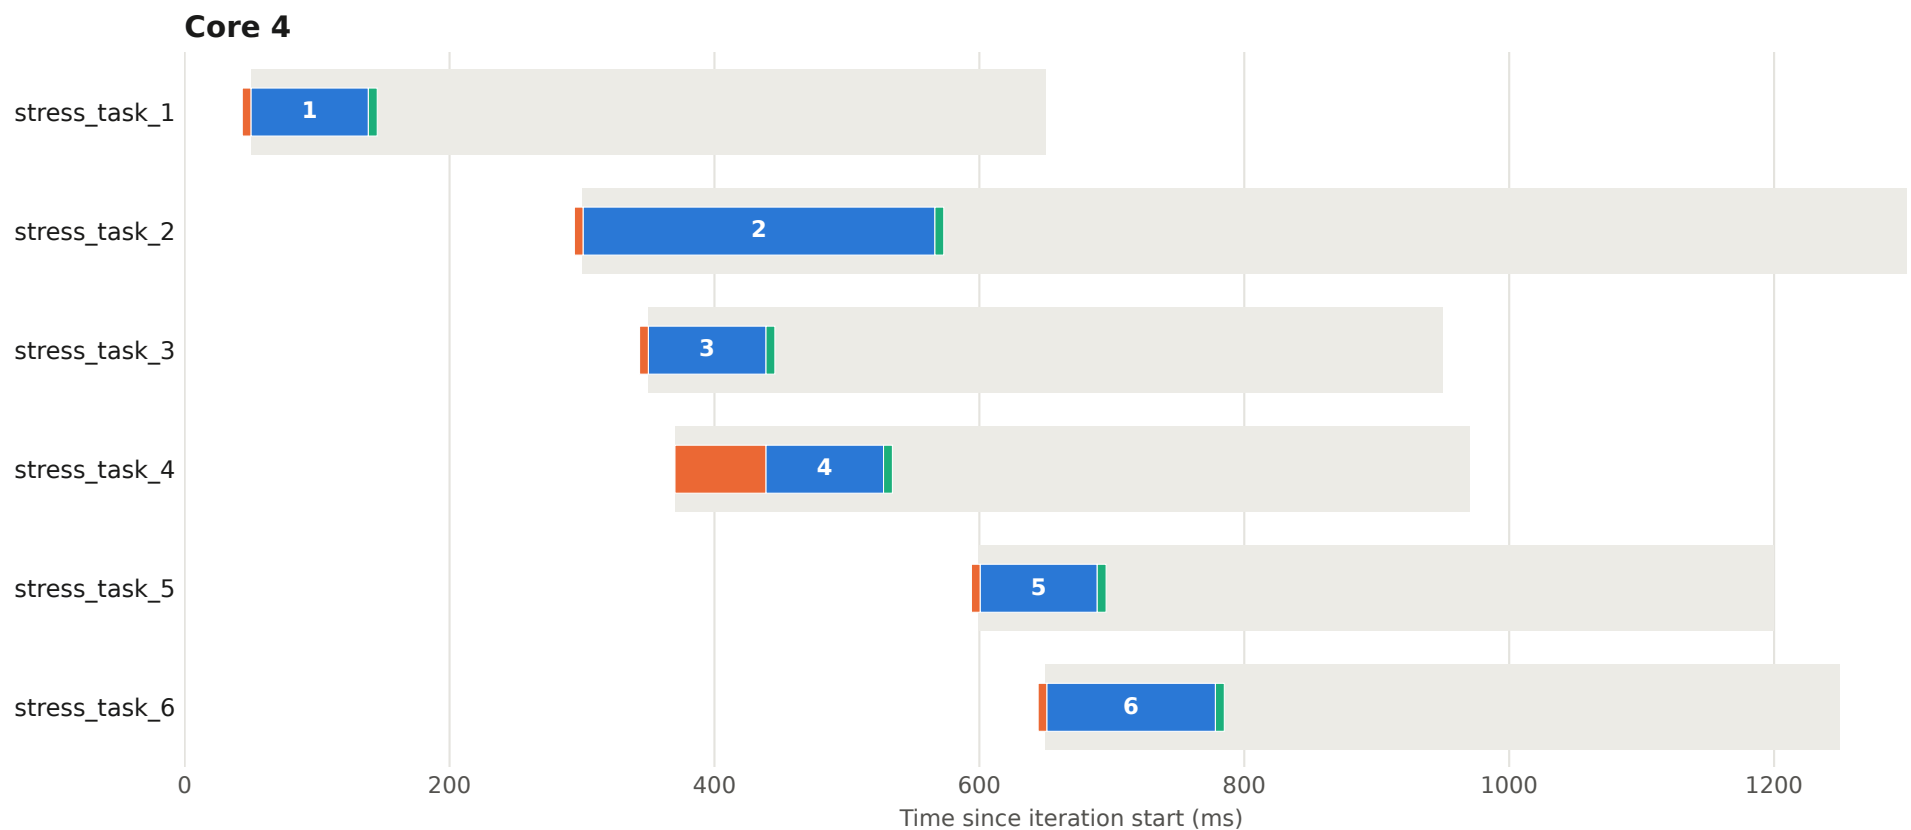


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 13 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

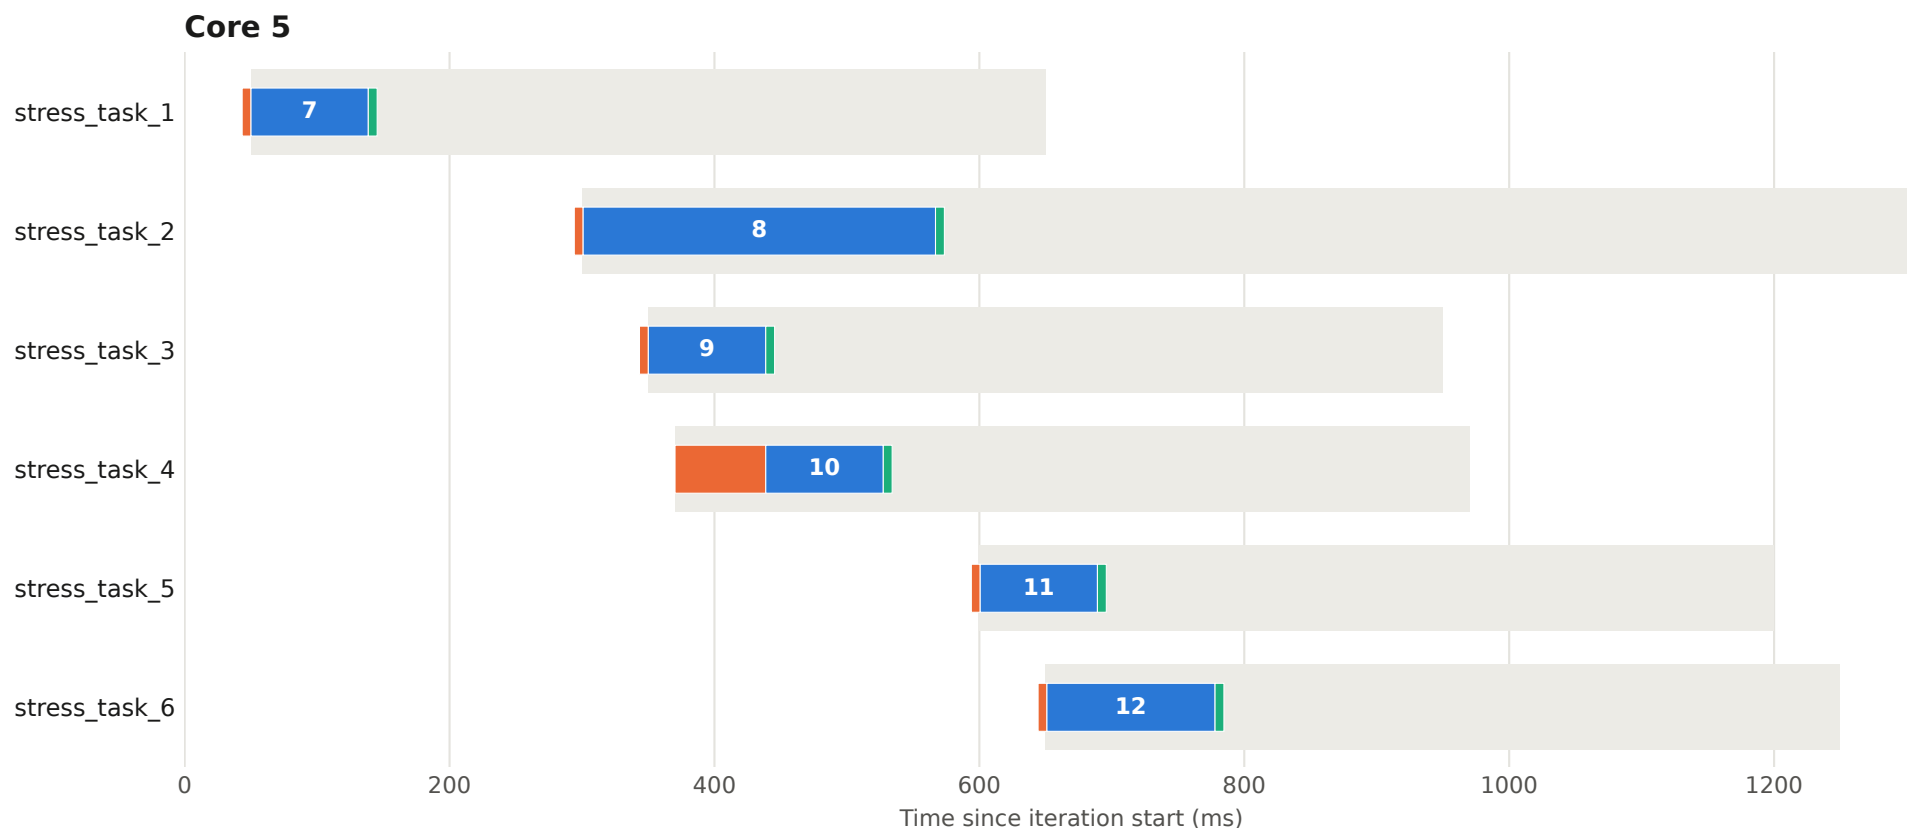


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 13 - core 6

One chart per core; each bar is one task call.


- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

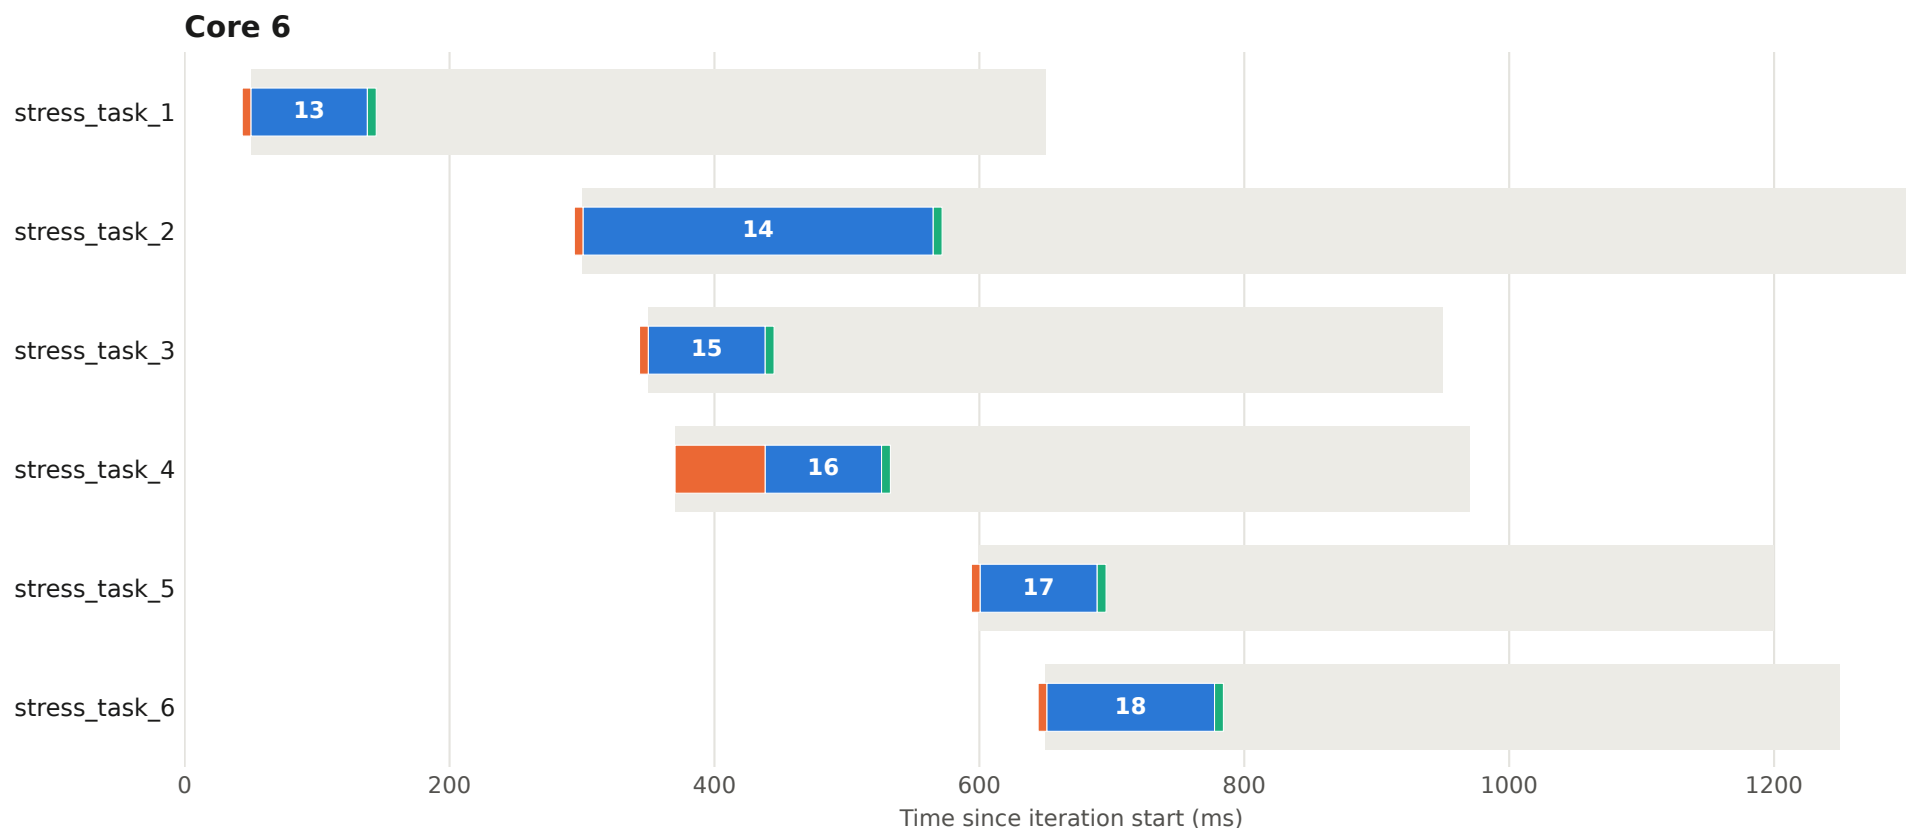

# Execution plan - iteration 13 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

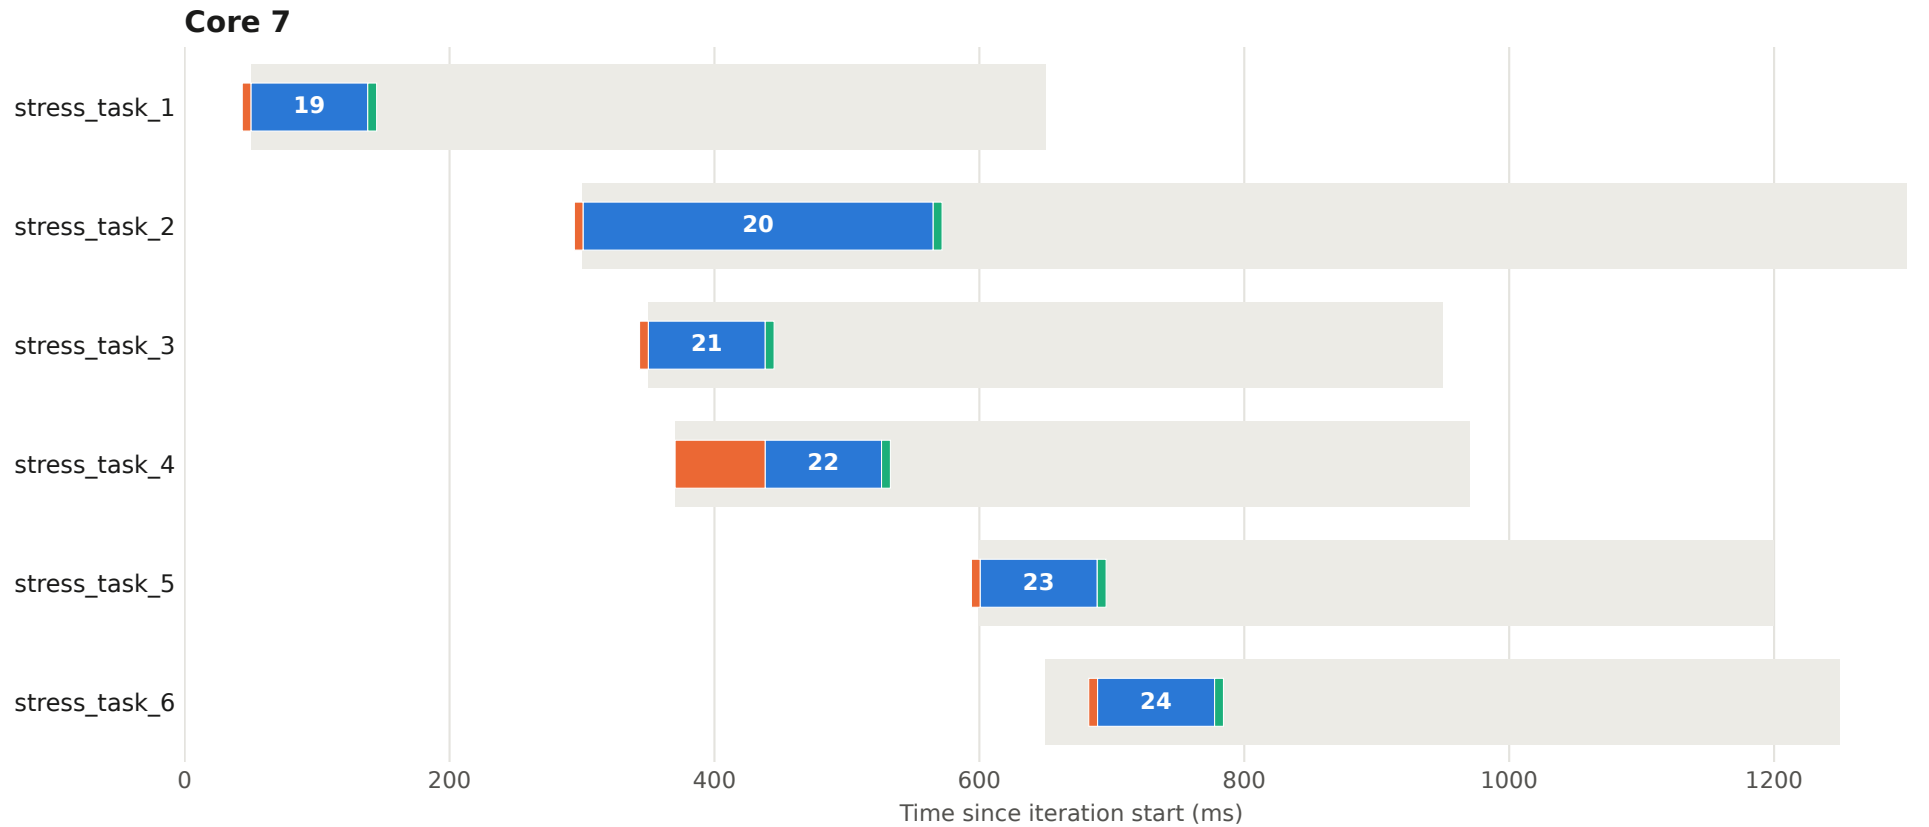


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 14 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

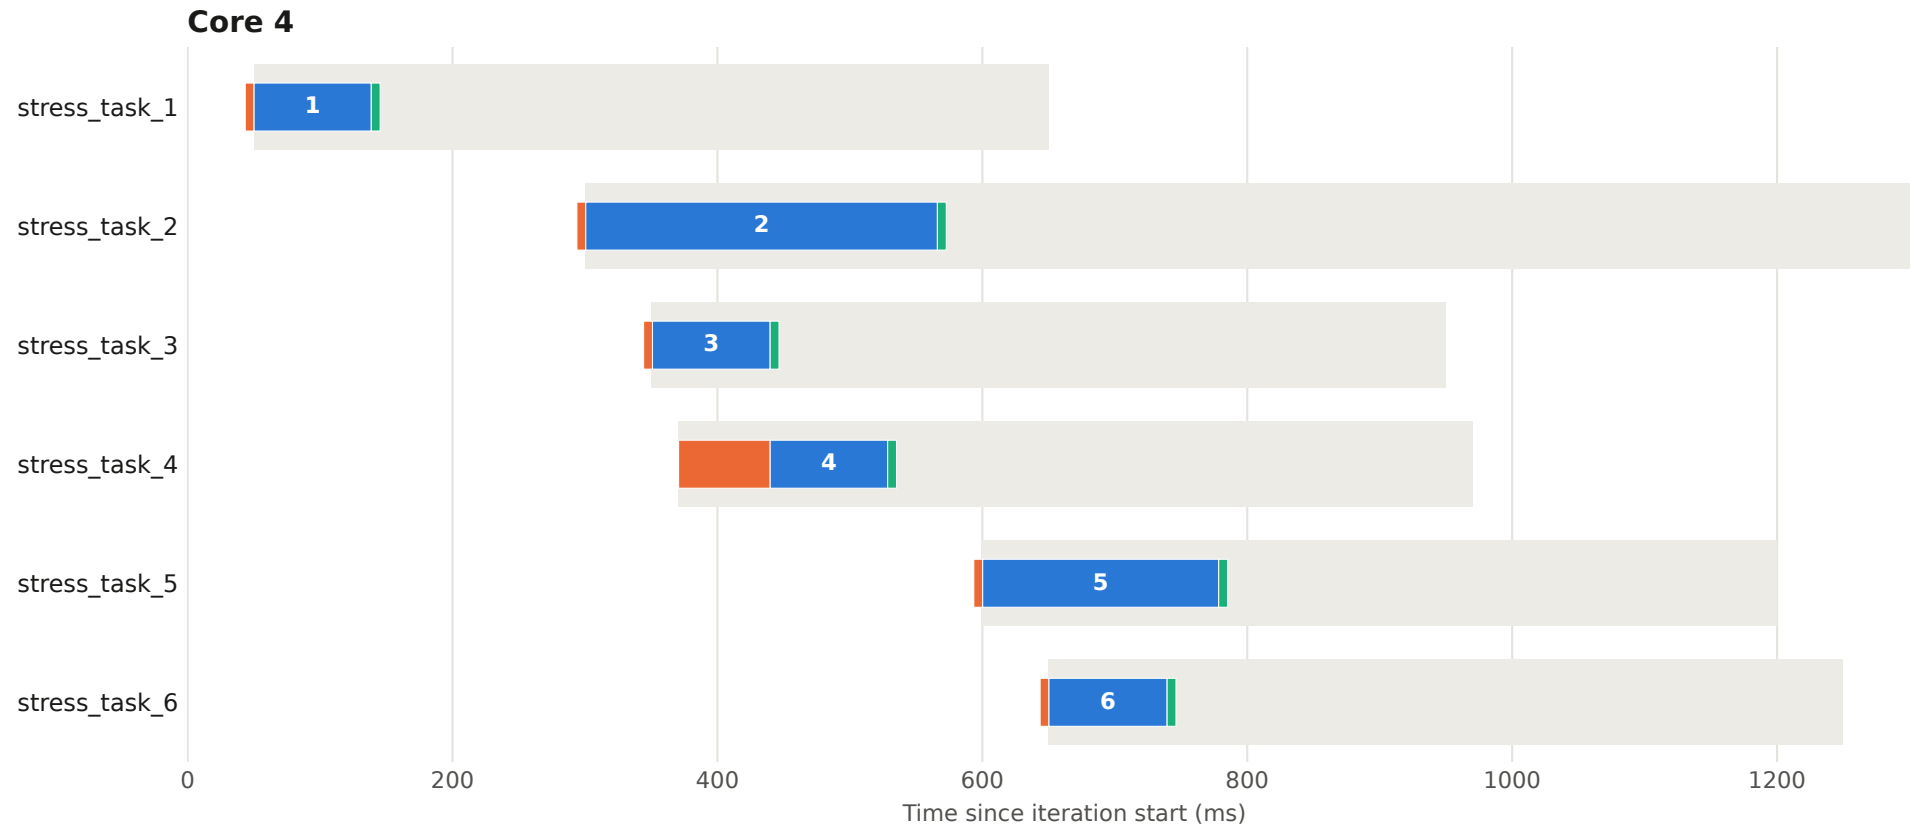


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 14 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

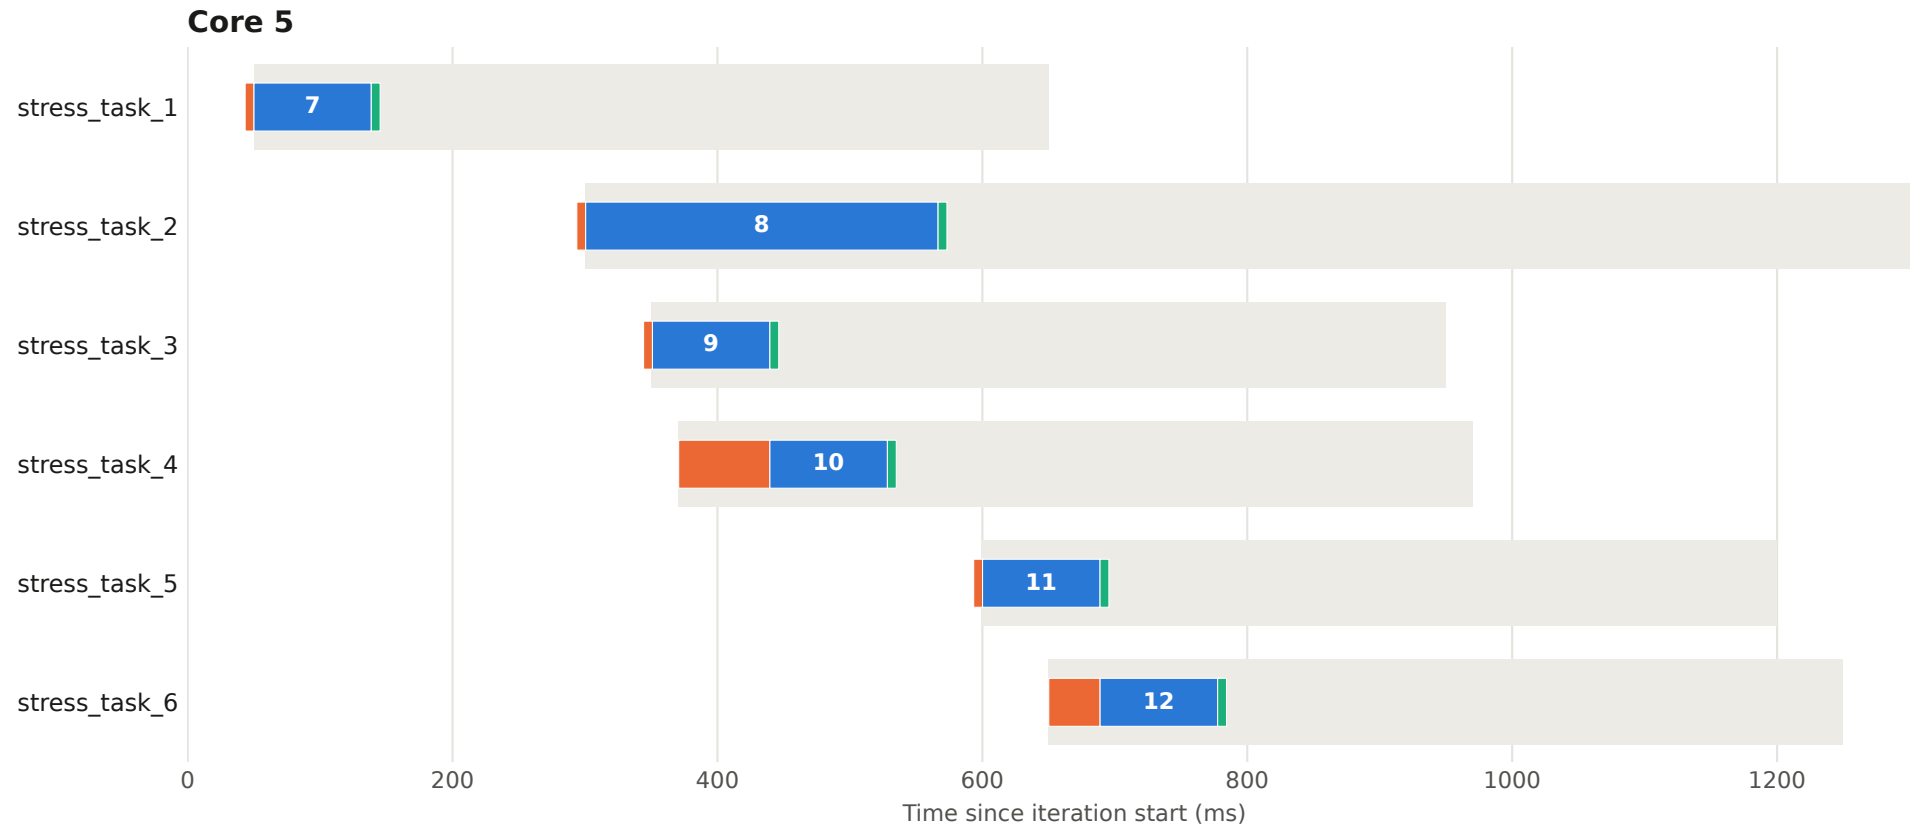


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 14 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

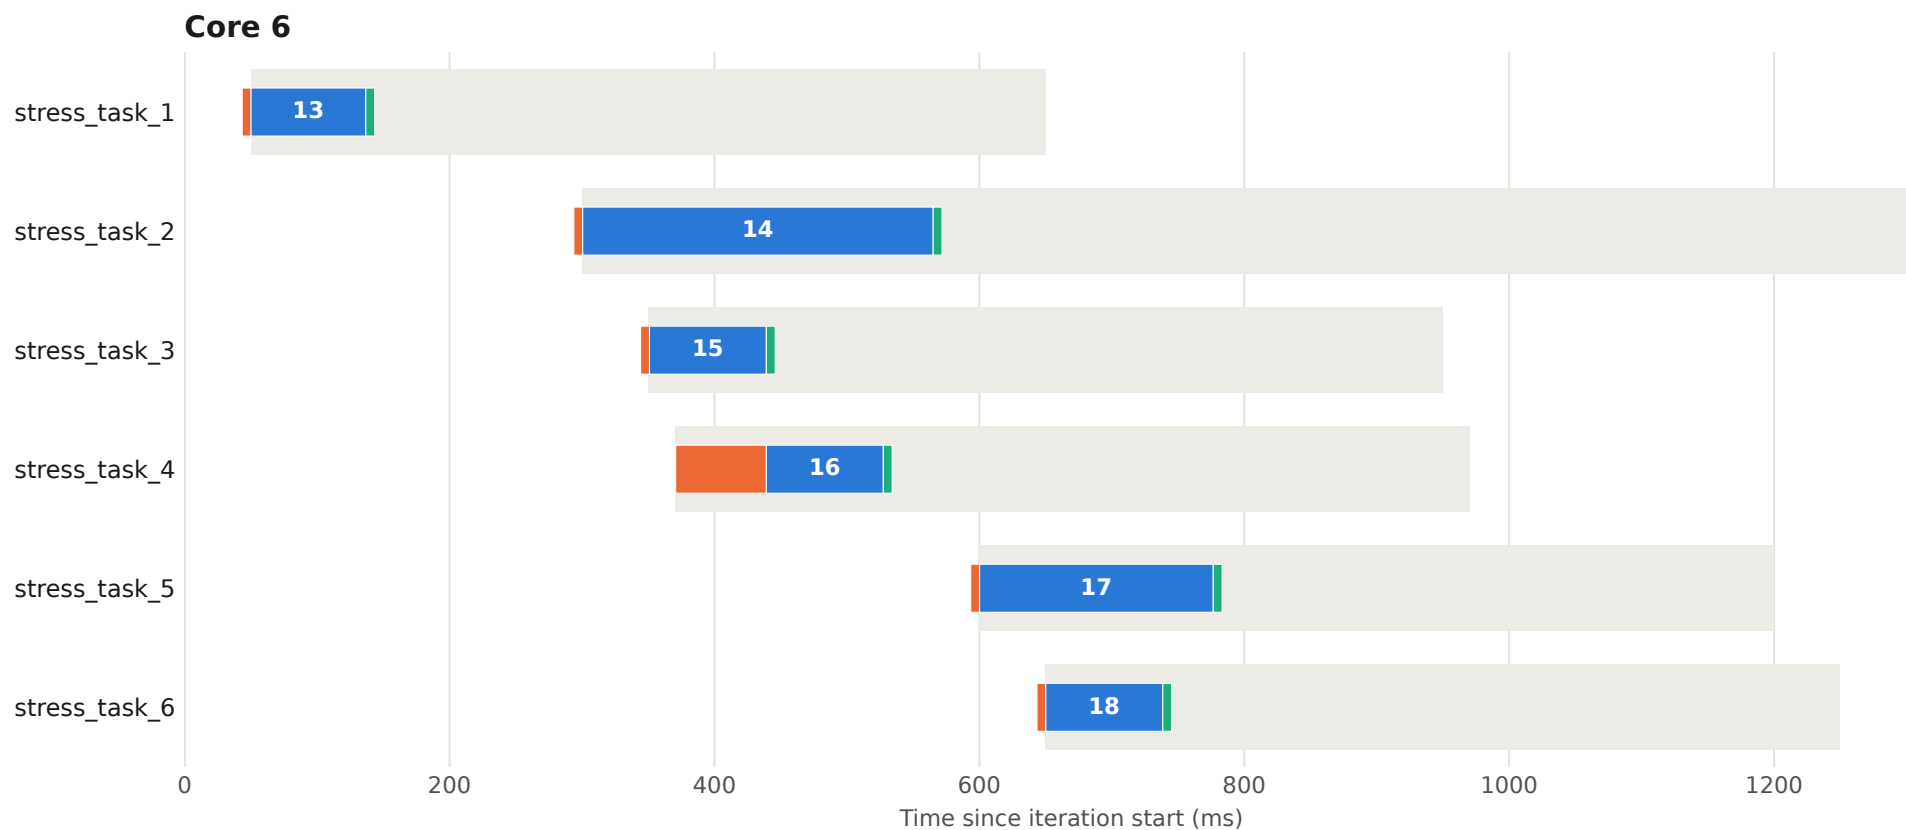


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 14 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

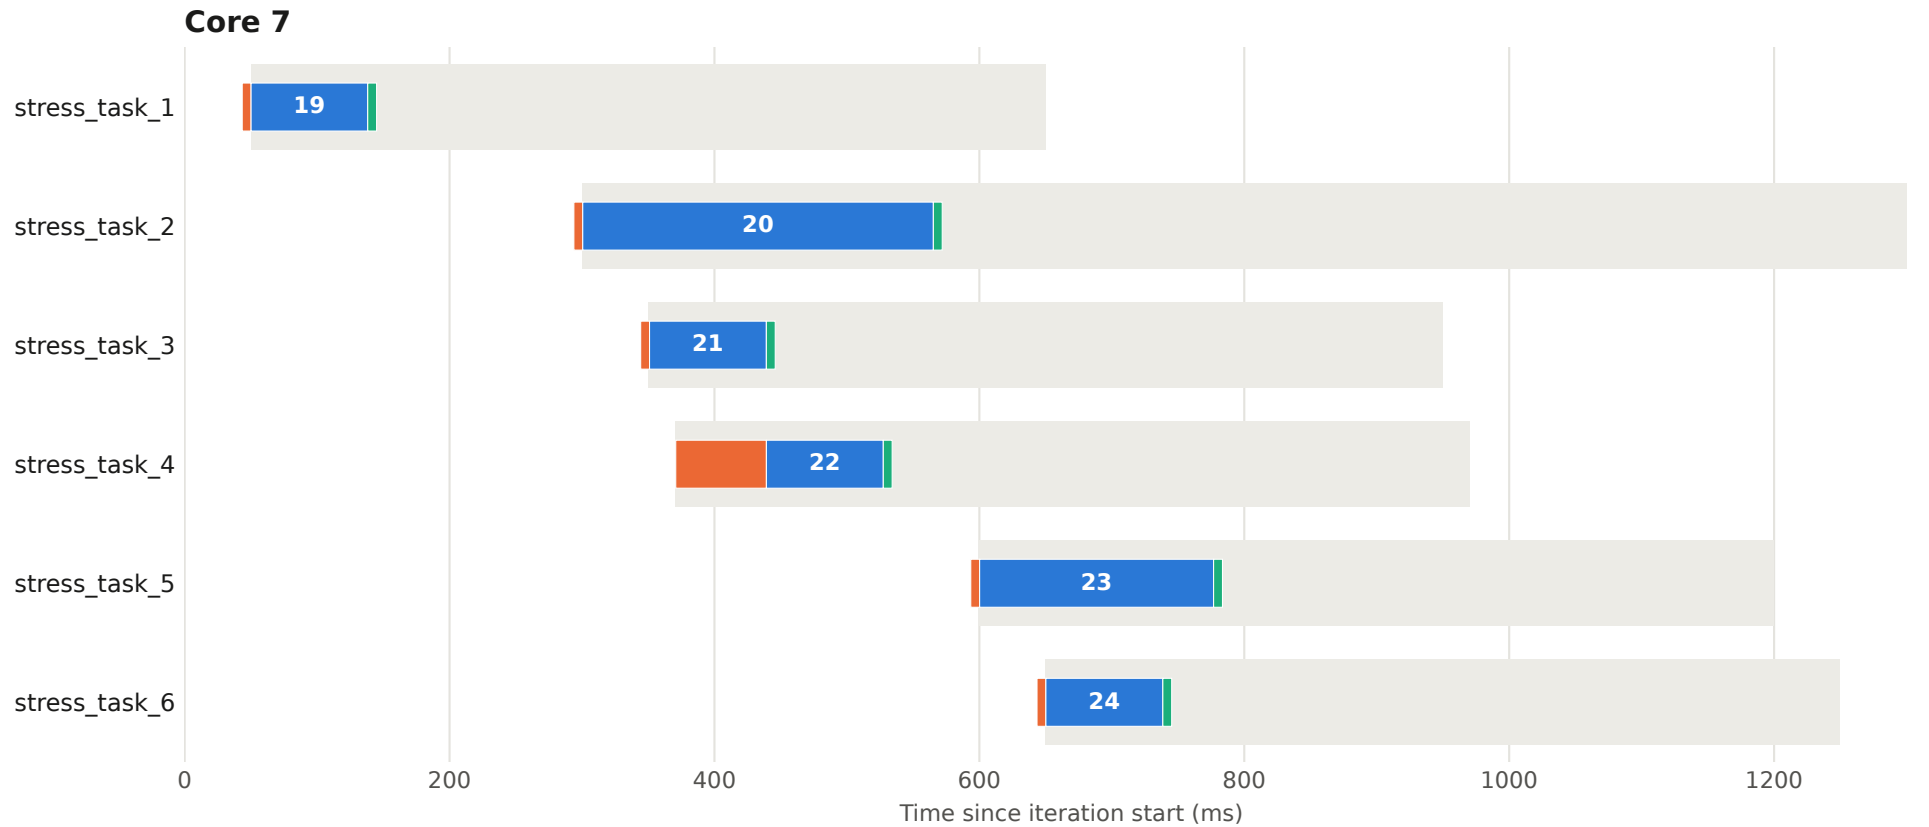


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 15 - core 4

One chart per core; each bar is one task call.


- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

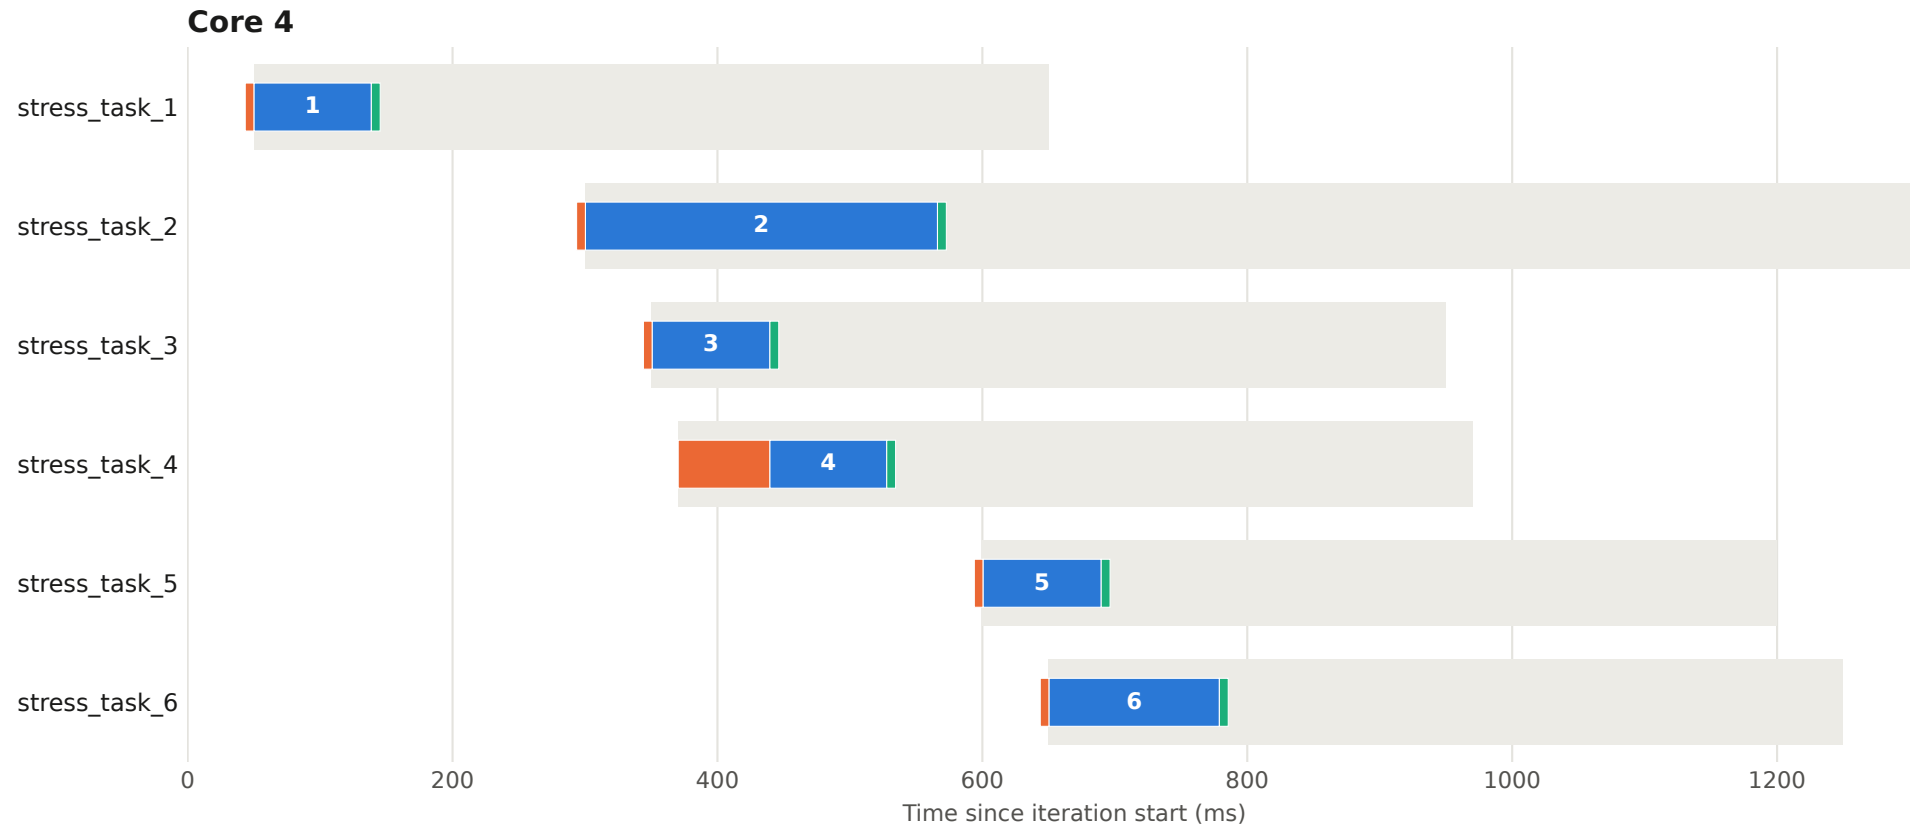

# Execution plan - iteration 15 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

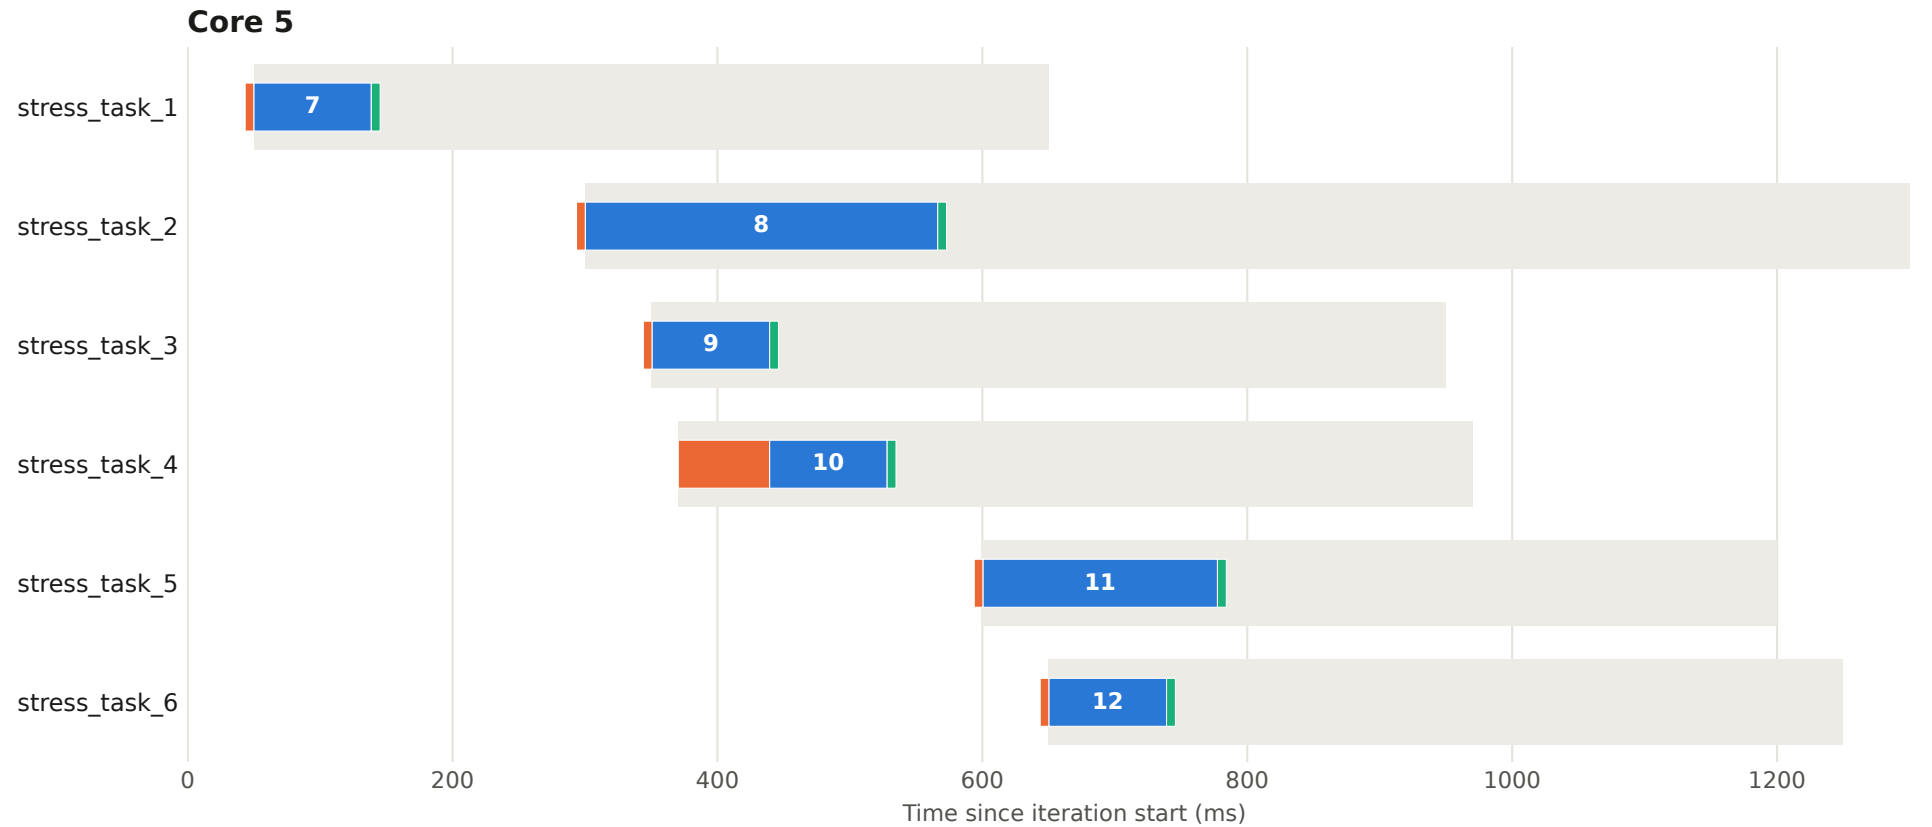


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 15 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

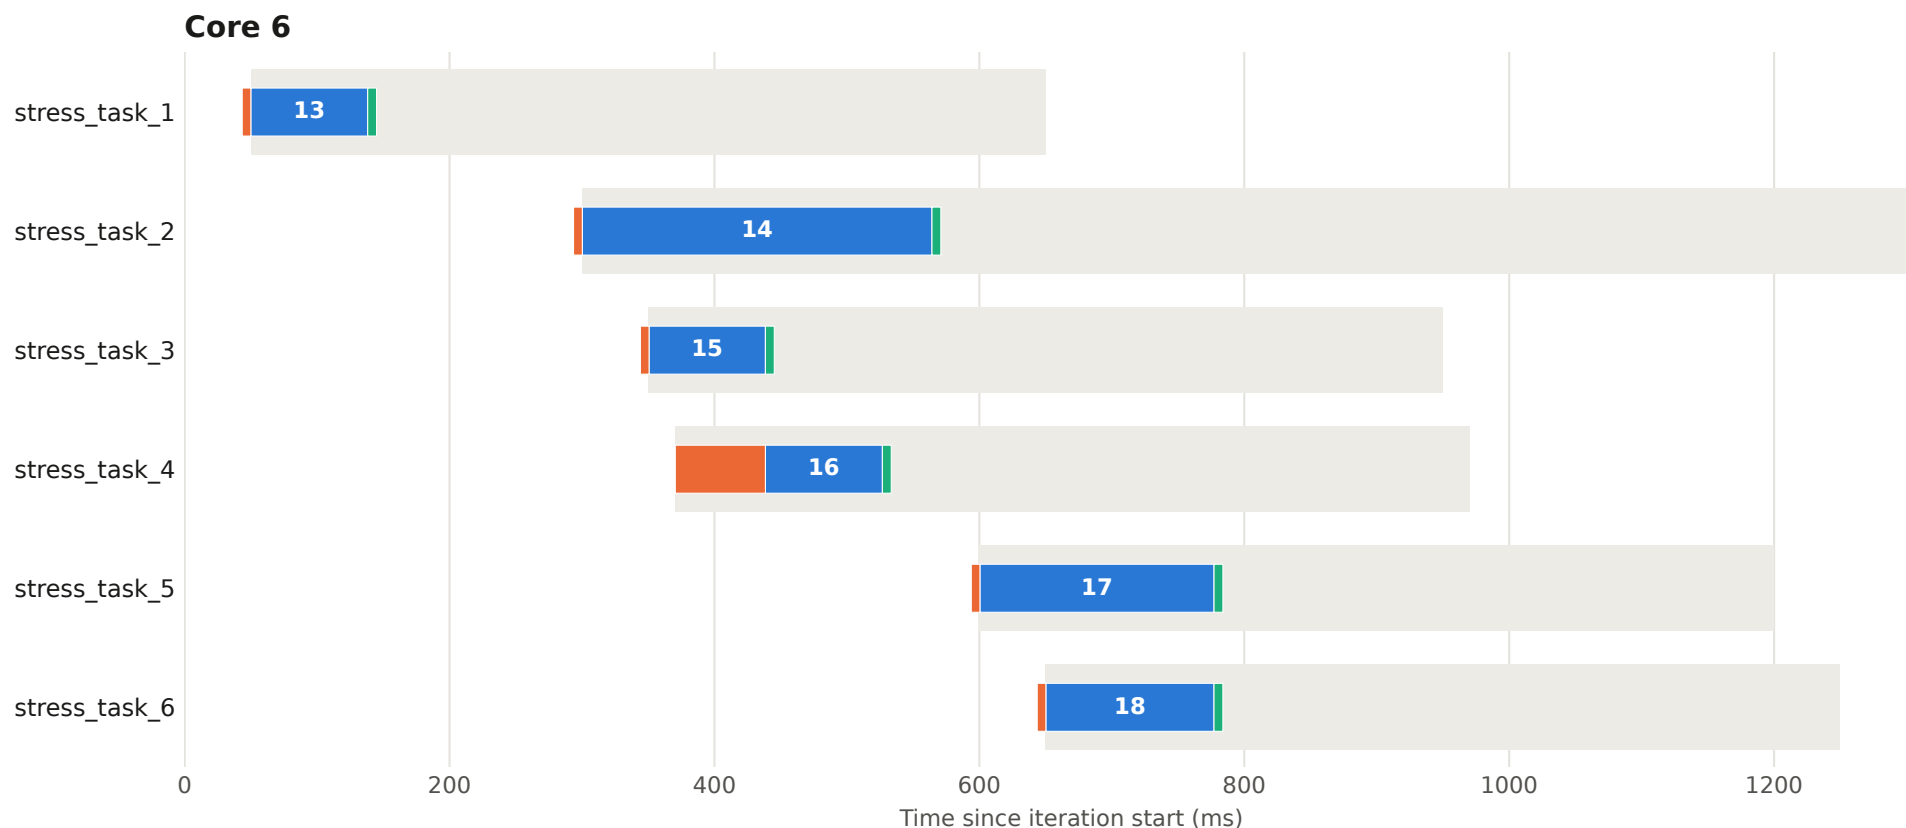


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 15 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

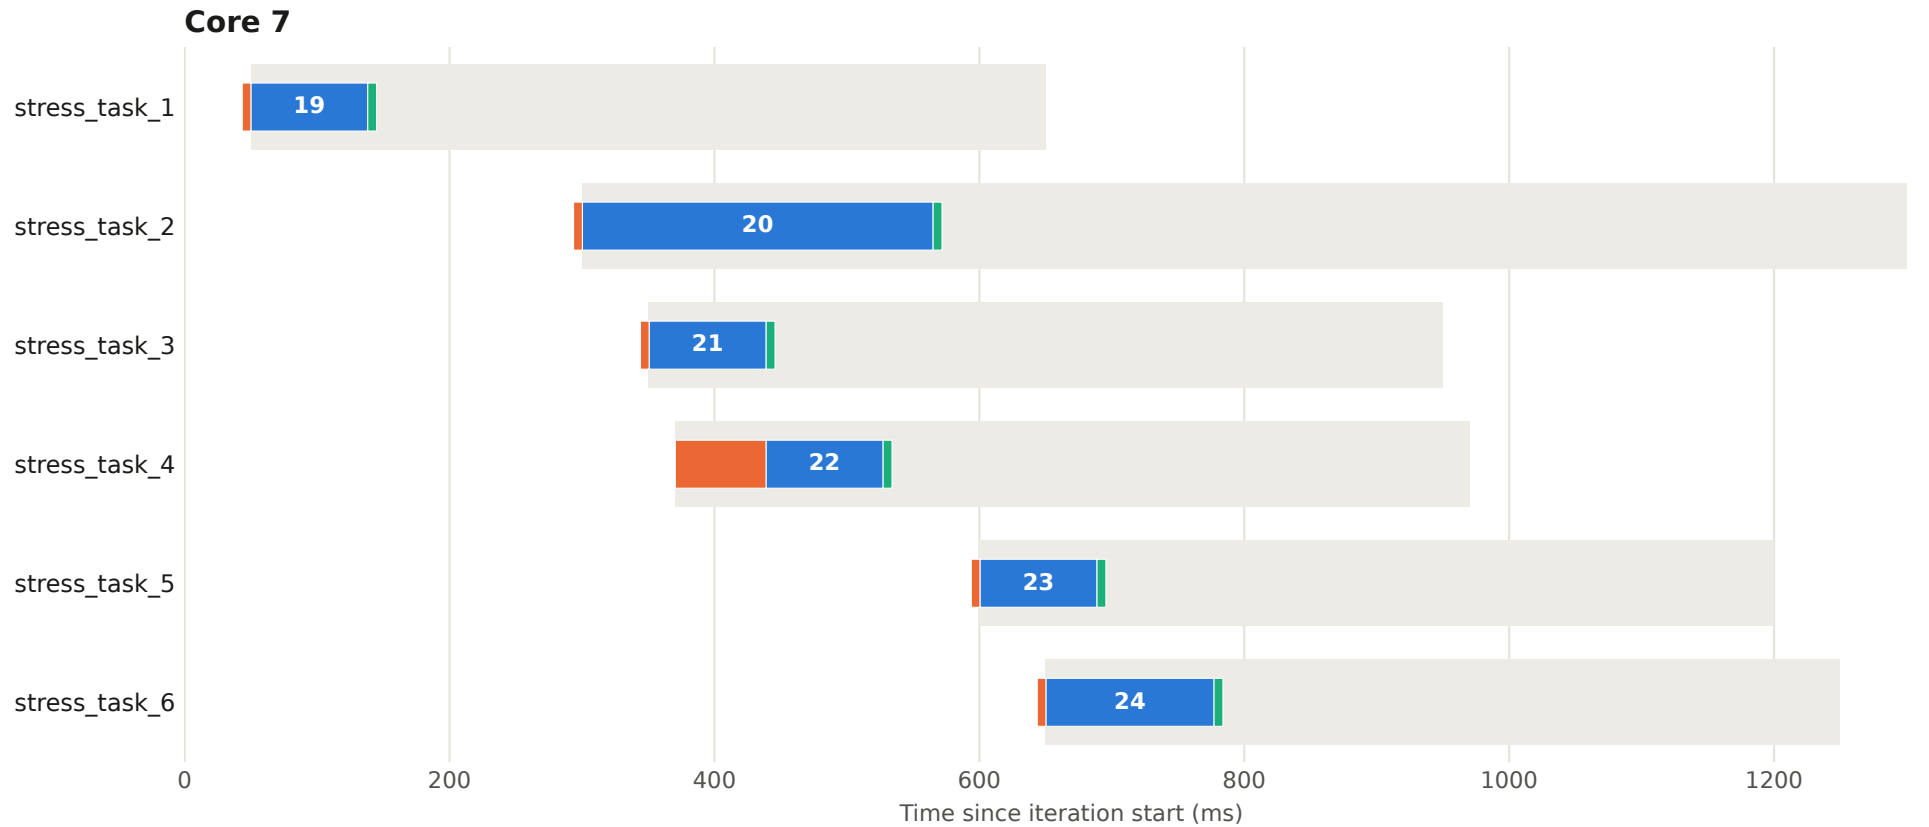


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 16 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

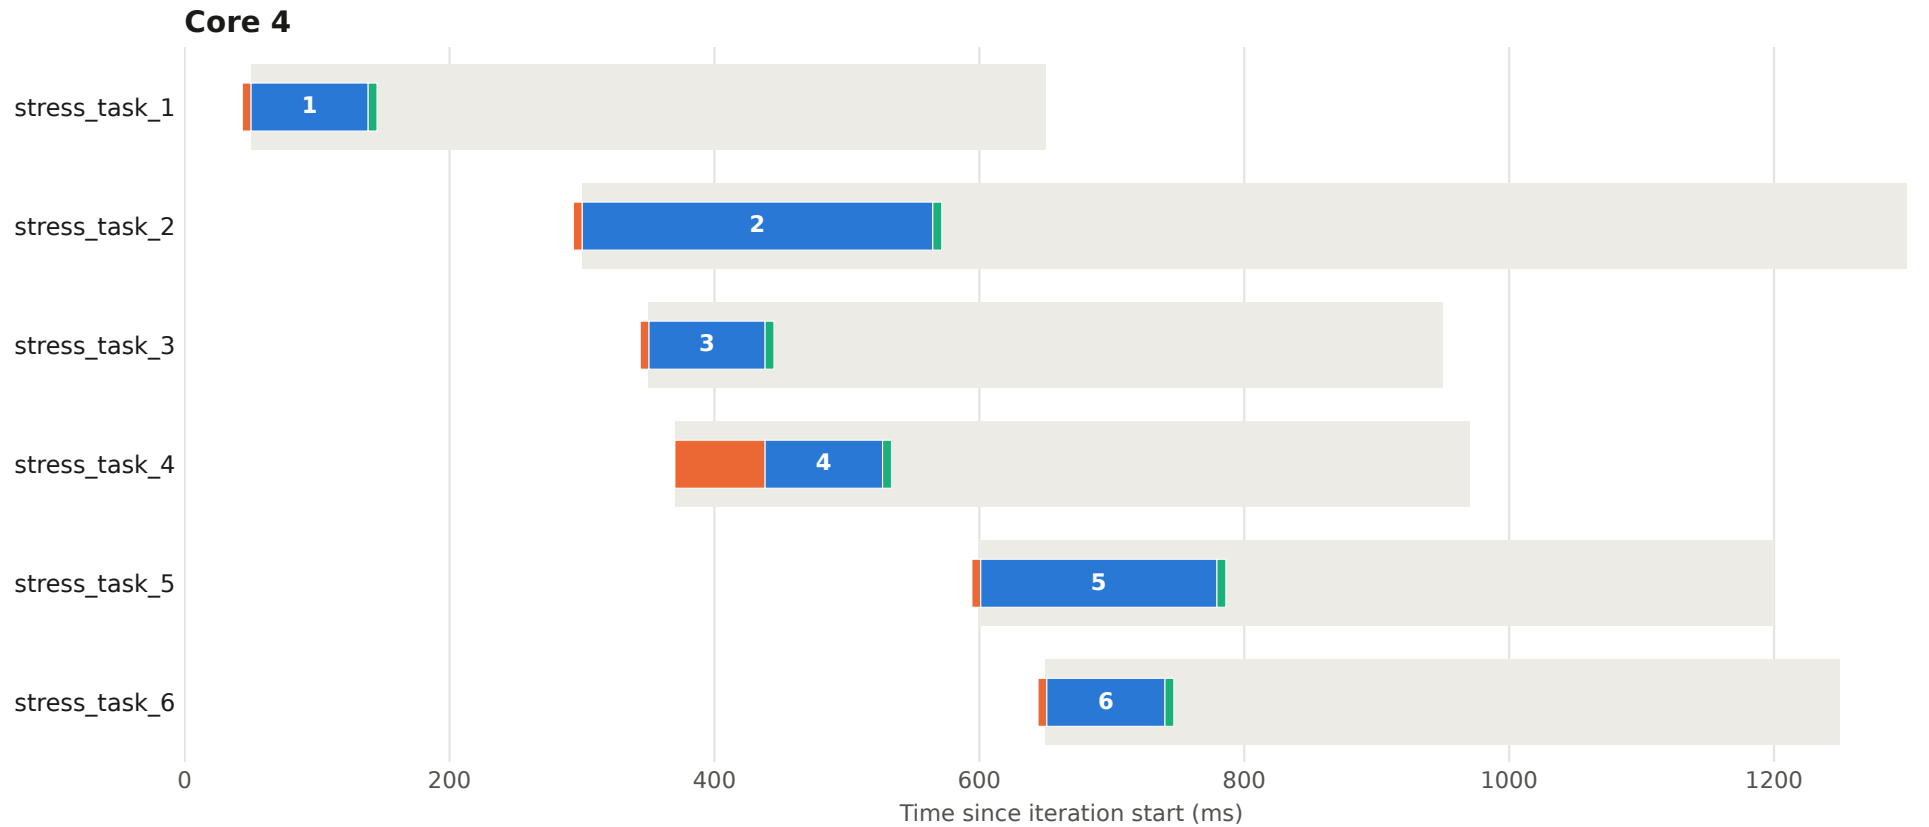


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 16 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

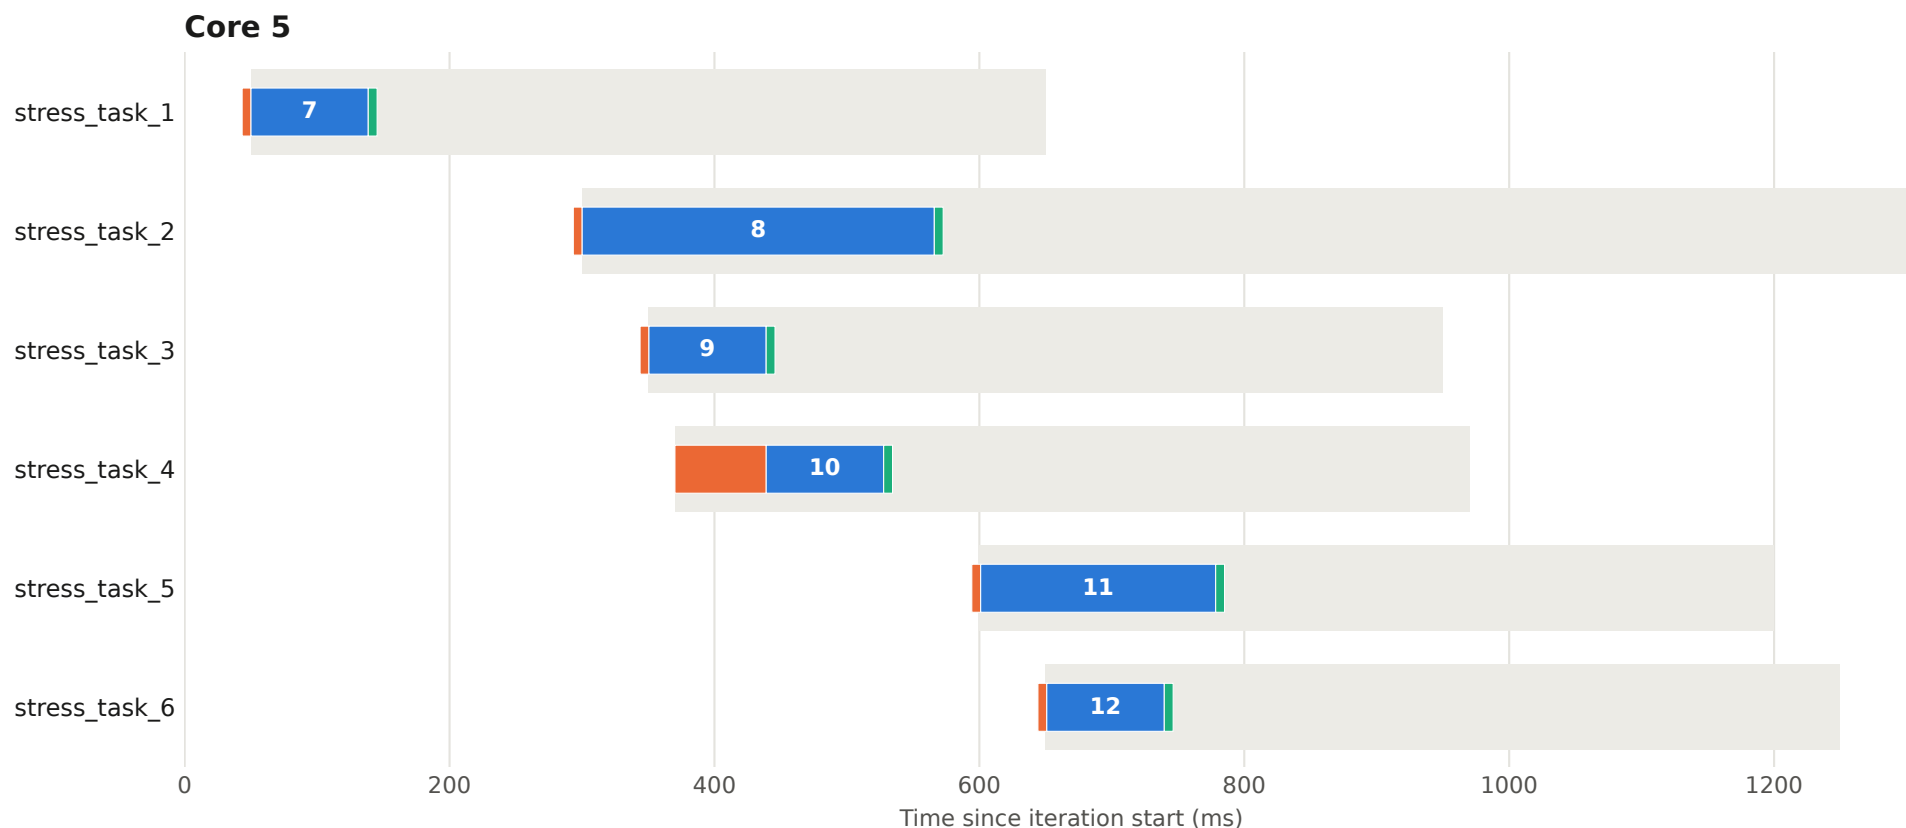


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 16 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

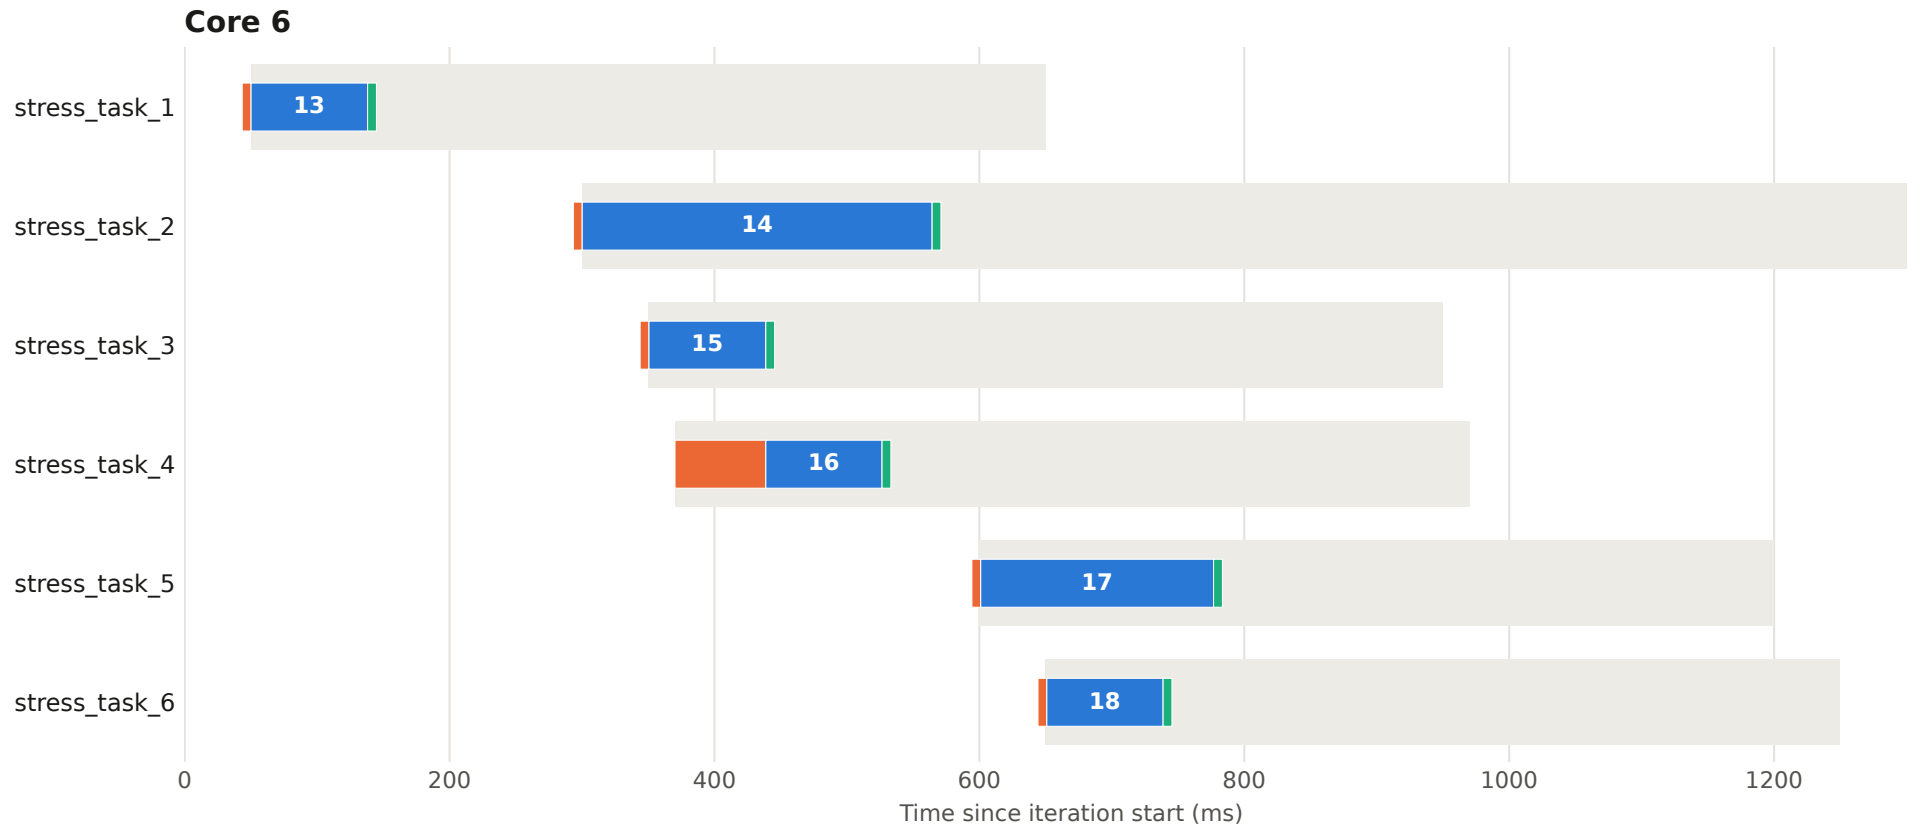


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 16 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

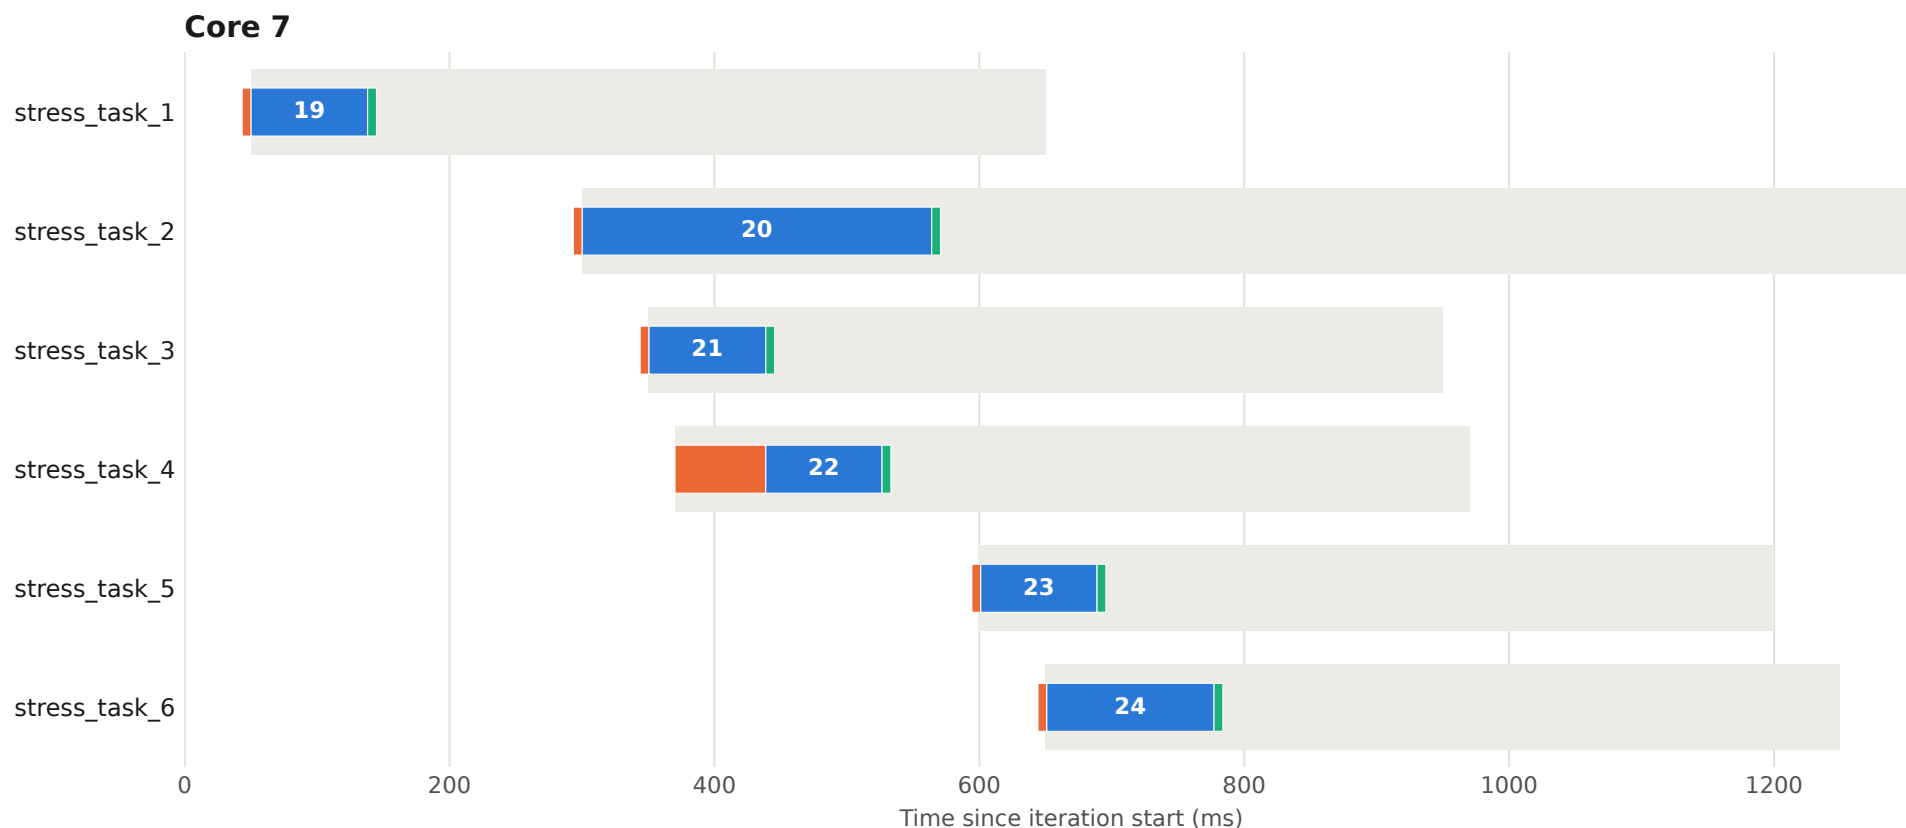


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 17 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

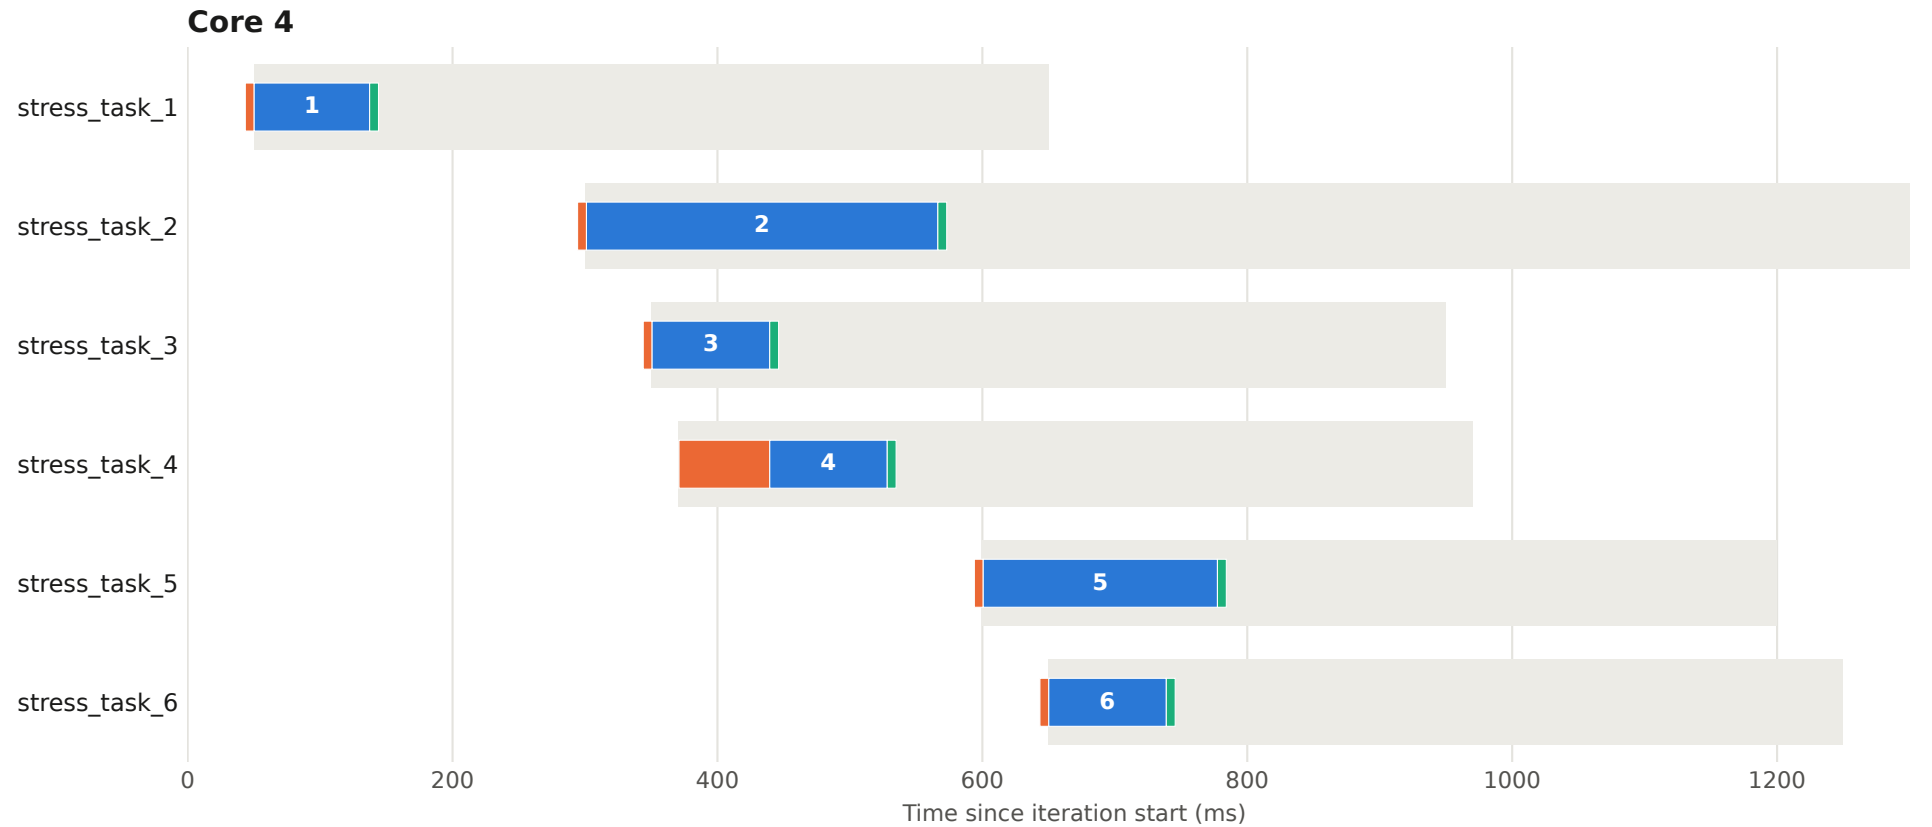


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 17 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

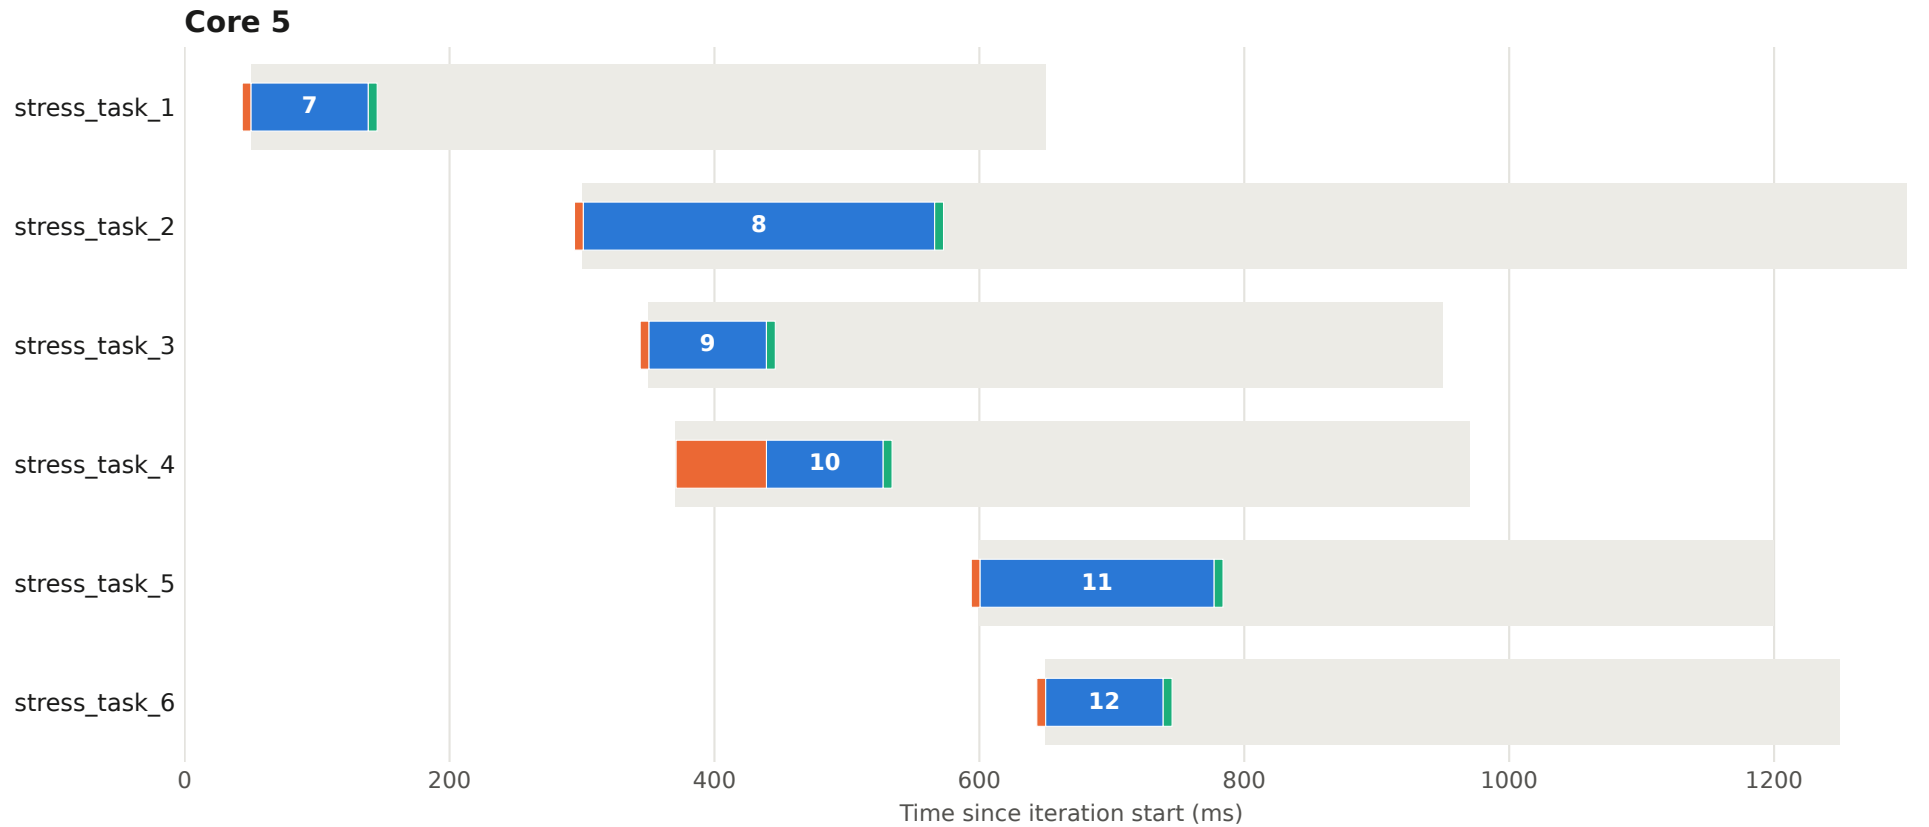


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 17 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

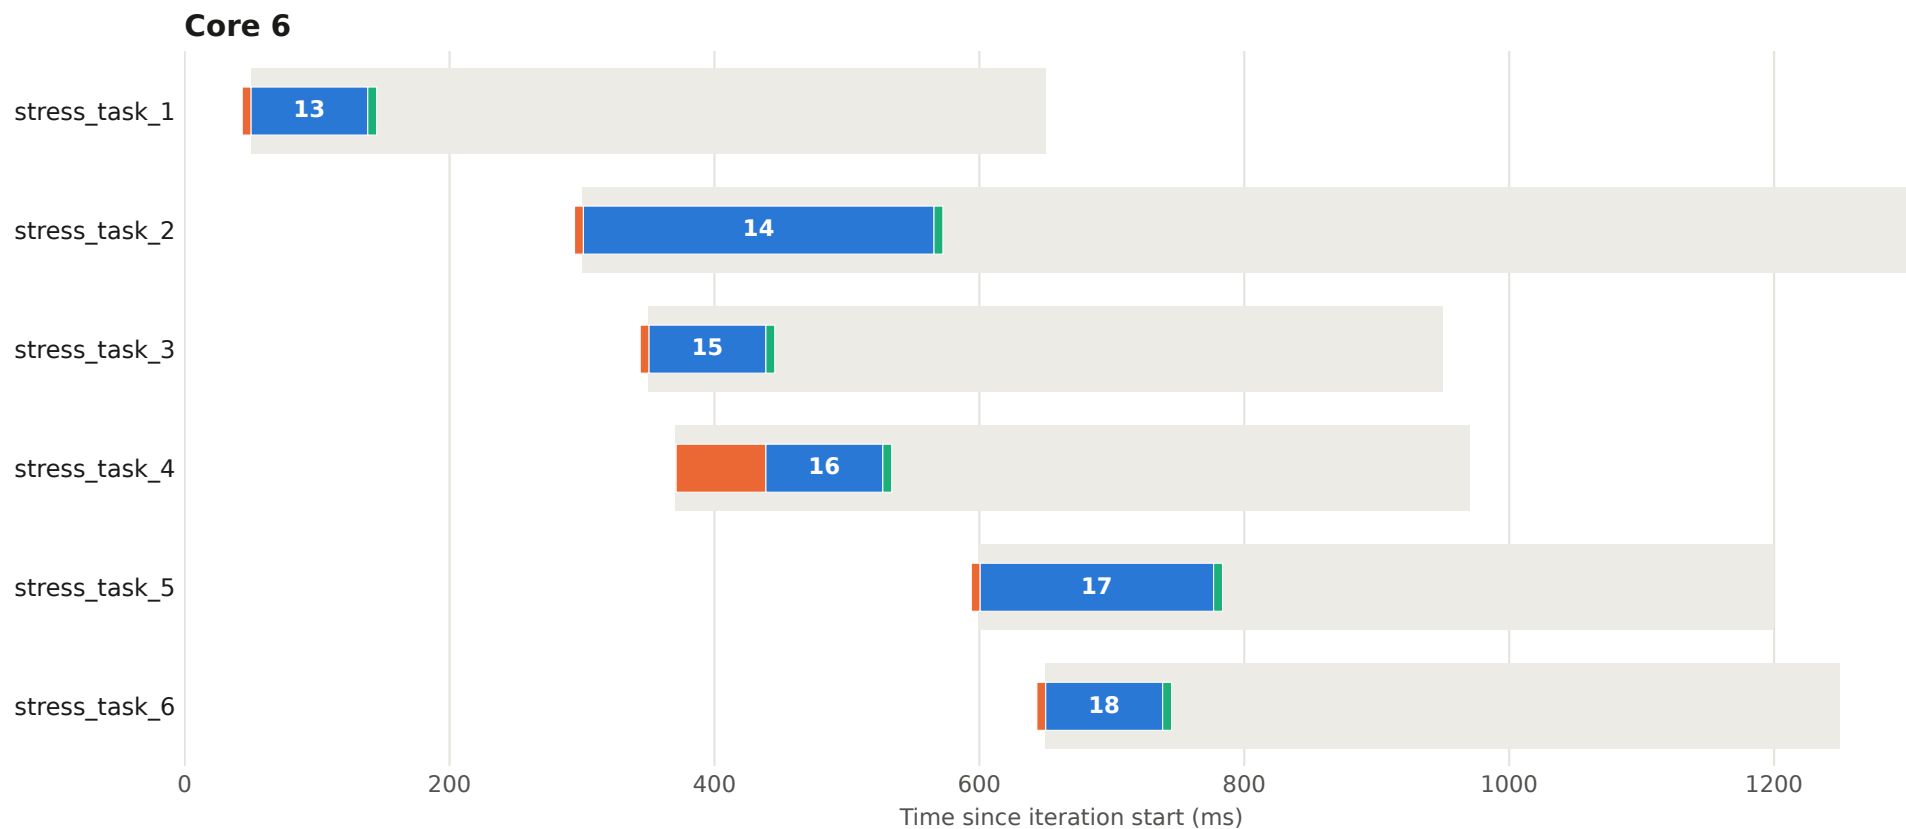


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 17 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

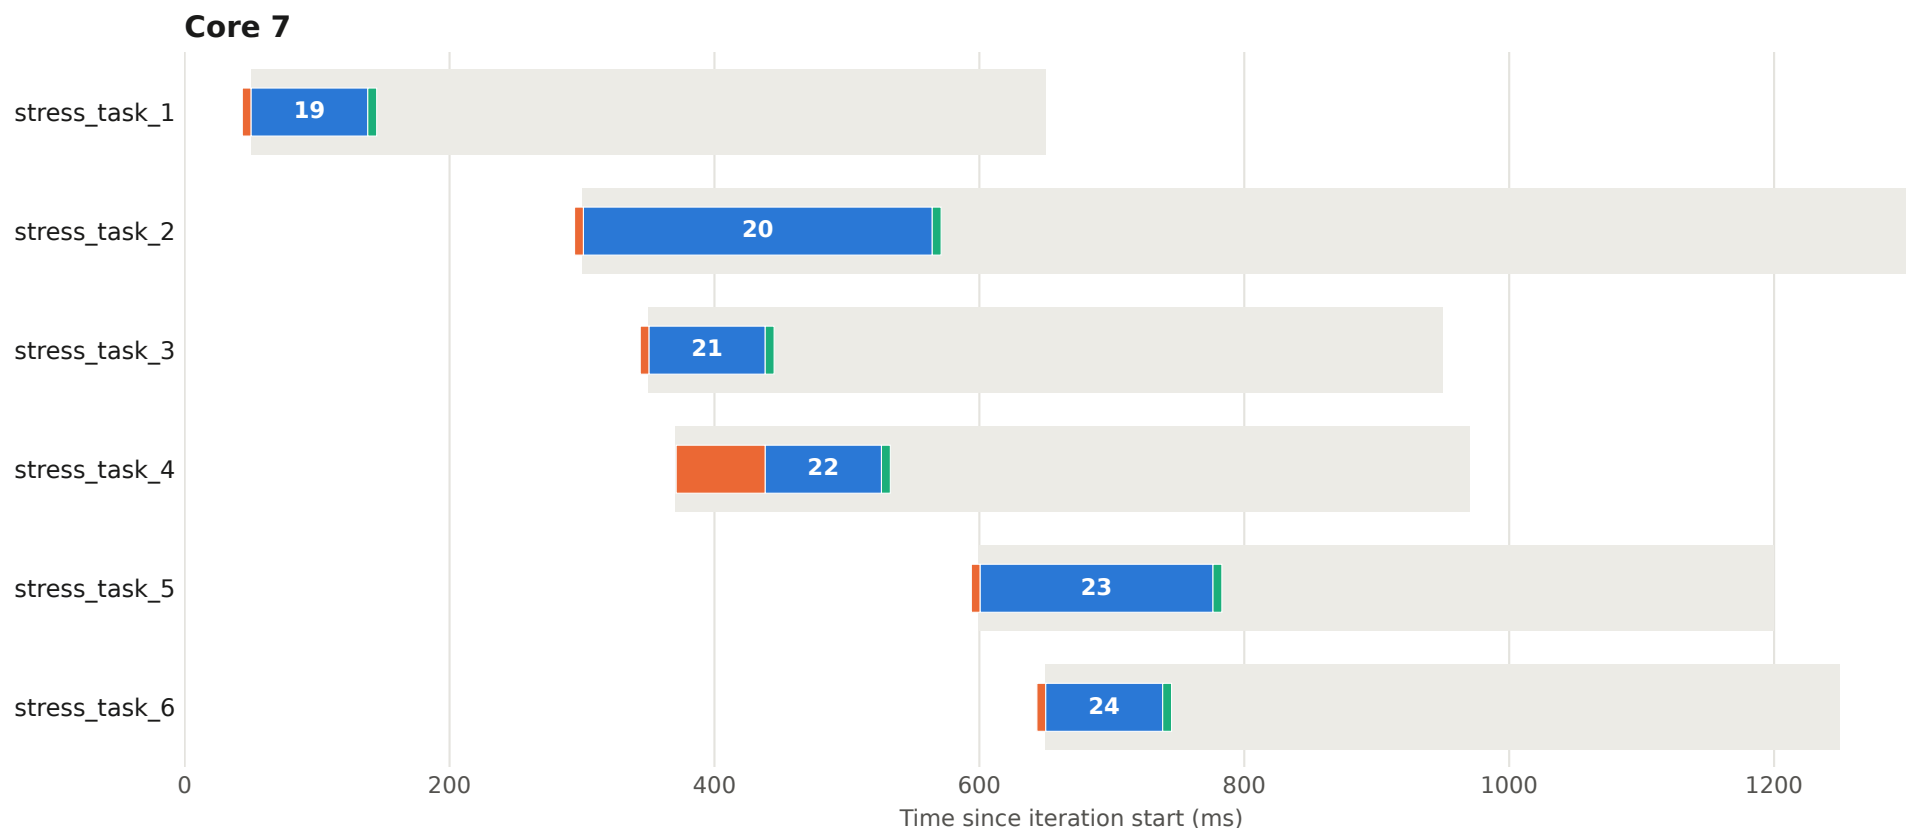


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 18 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

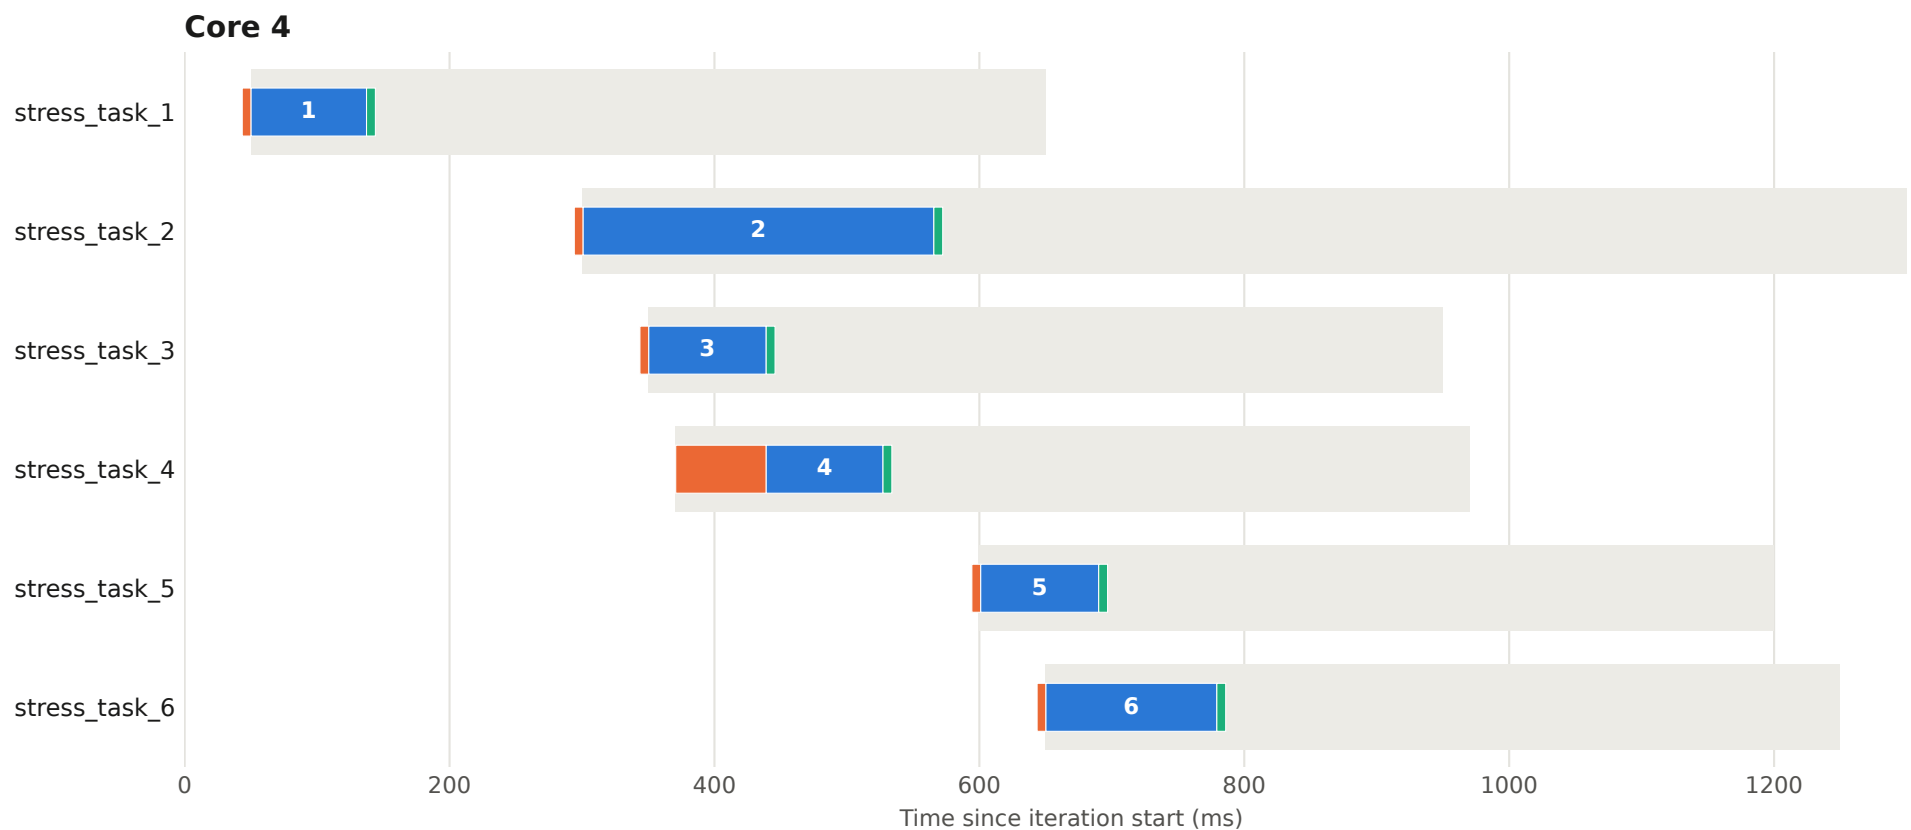


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 18 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

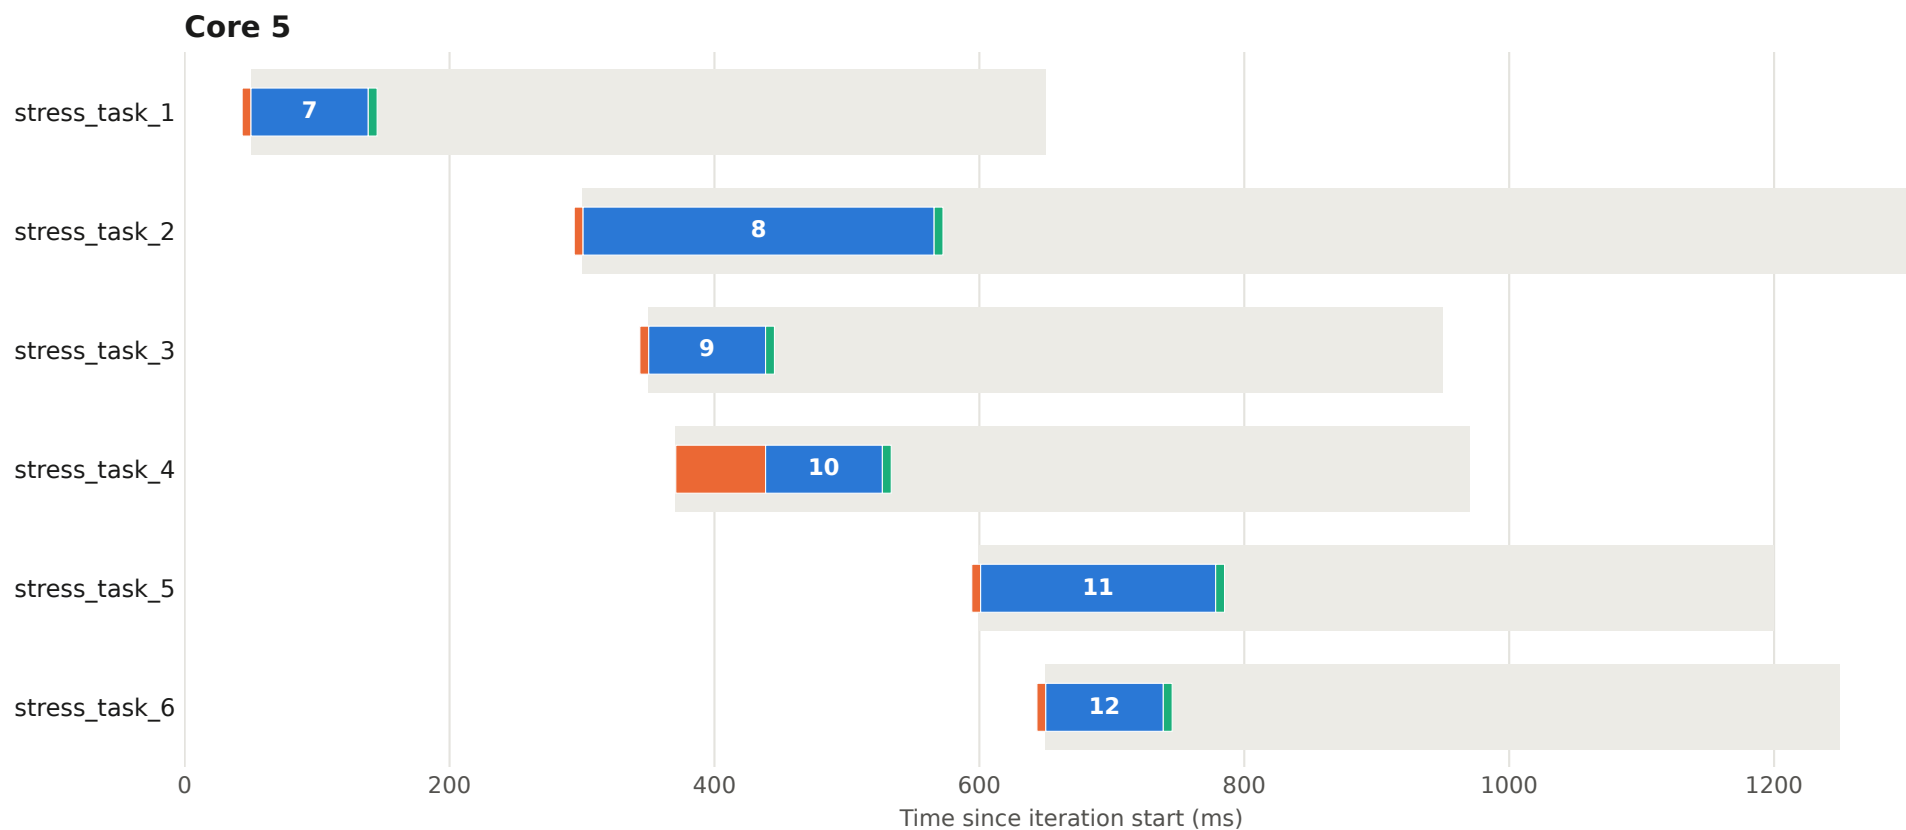


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 18 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

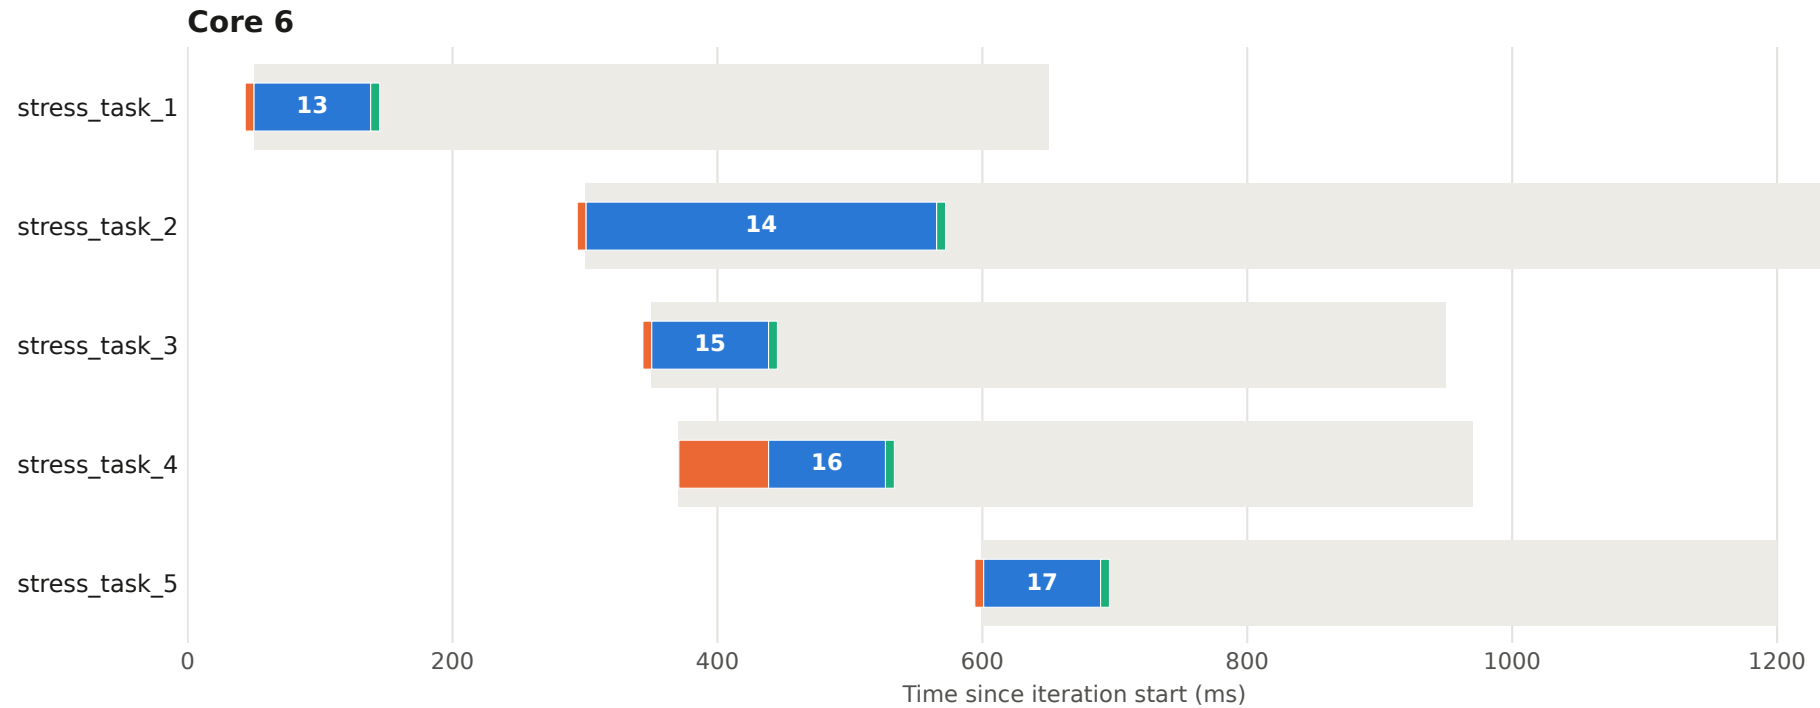


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 18 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

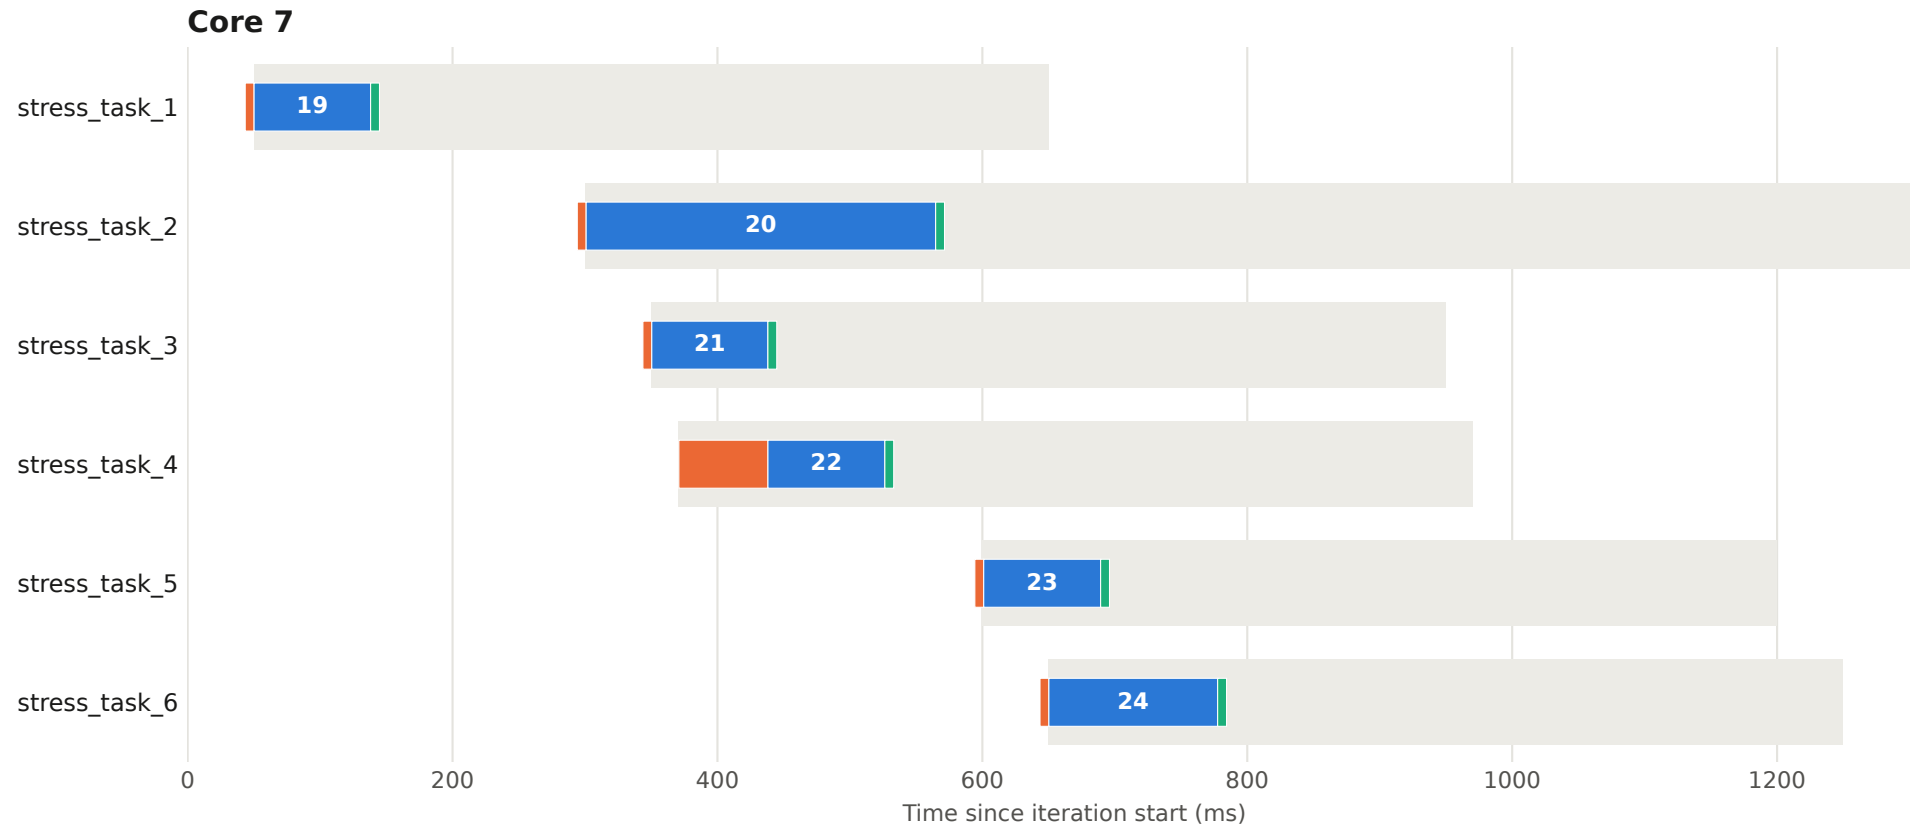


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 18 - core 62026

One chart per core; each bar is one task call.


- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

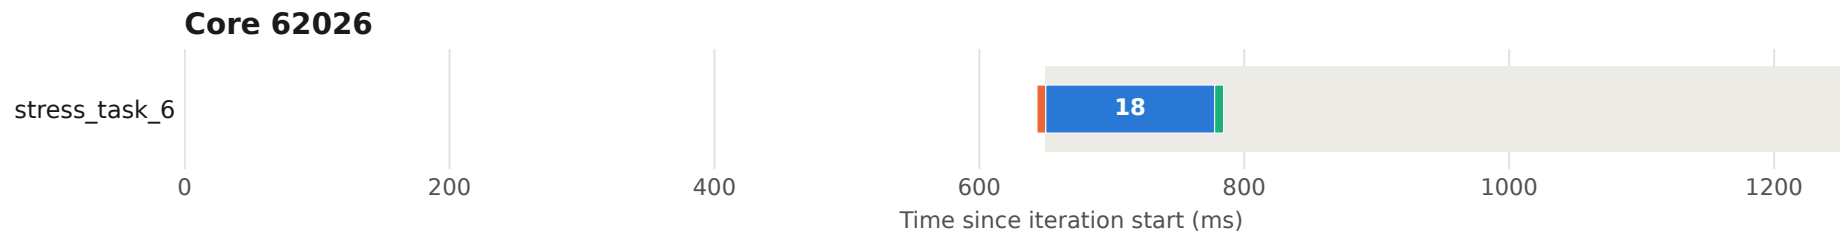

# Execution plan - iteration 19 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

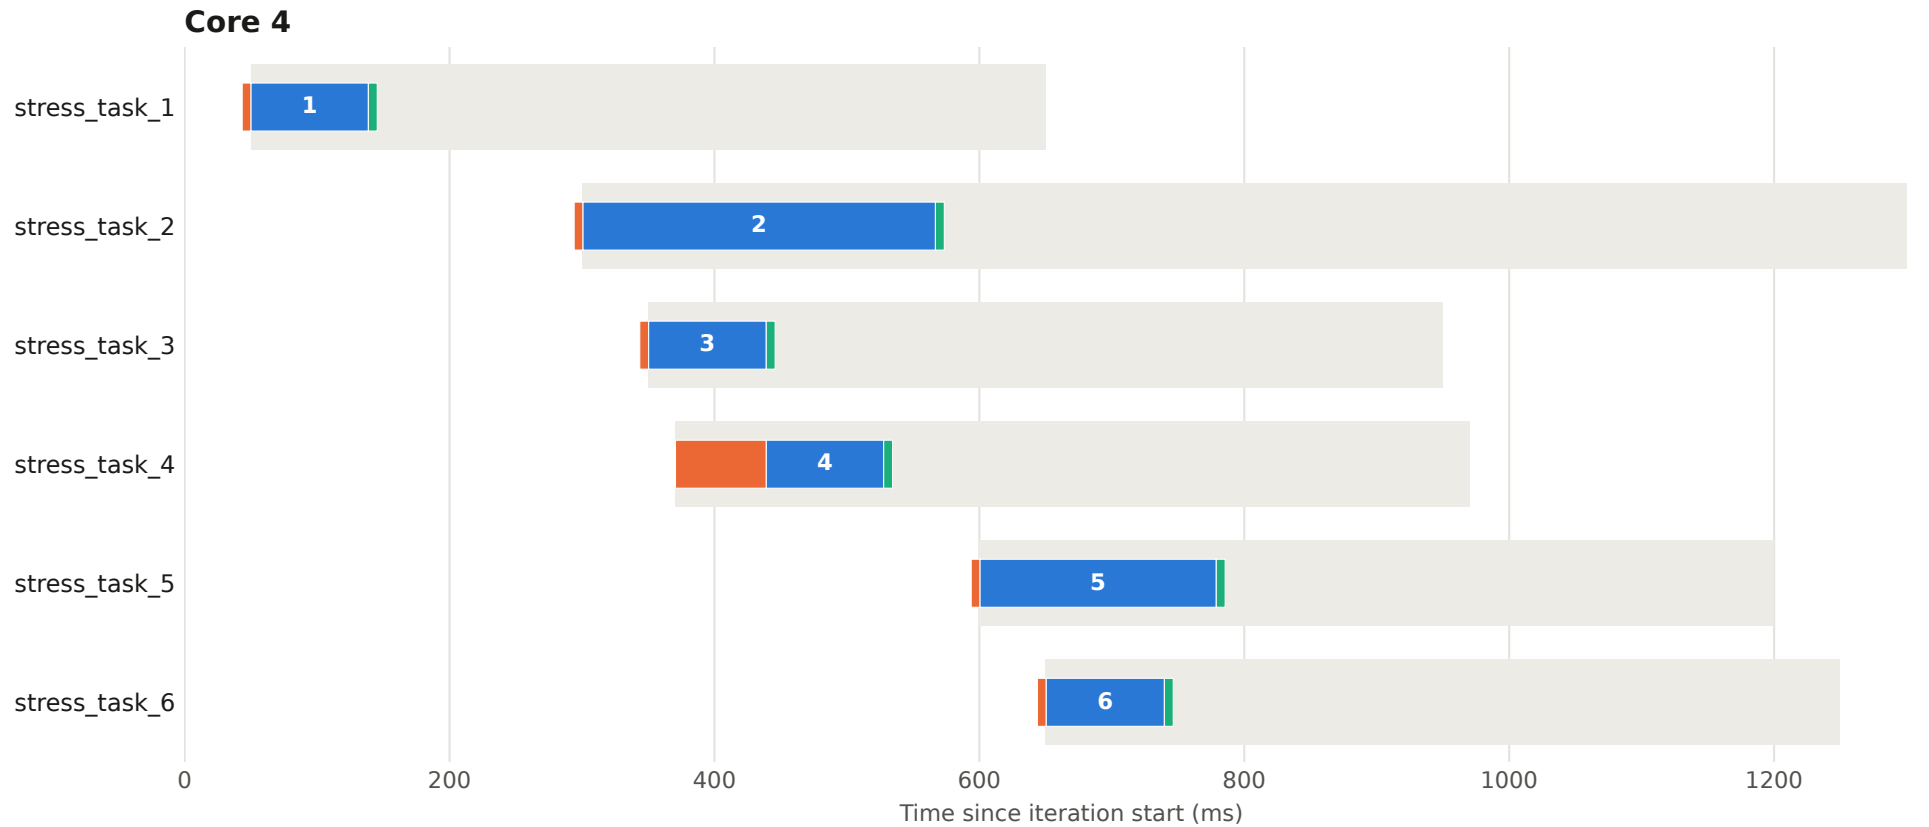


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 19 - core 5

One chart per core; each bar is one task call.


- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

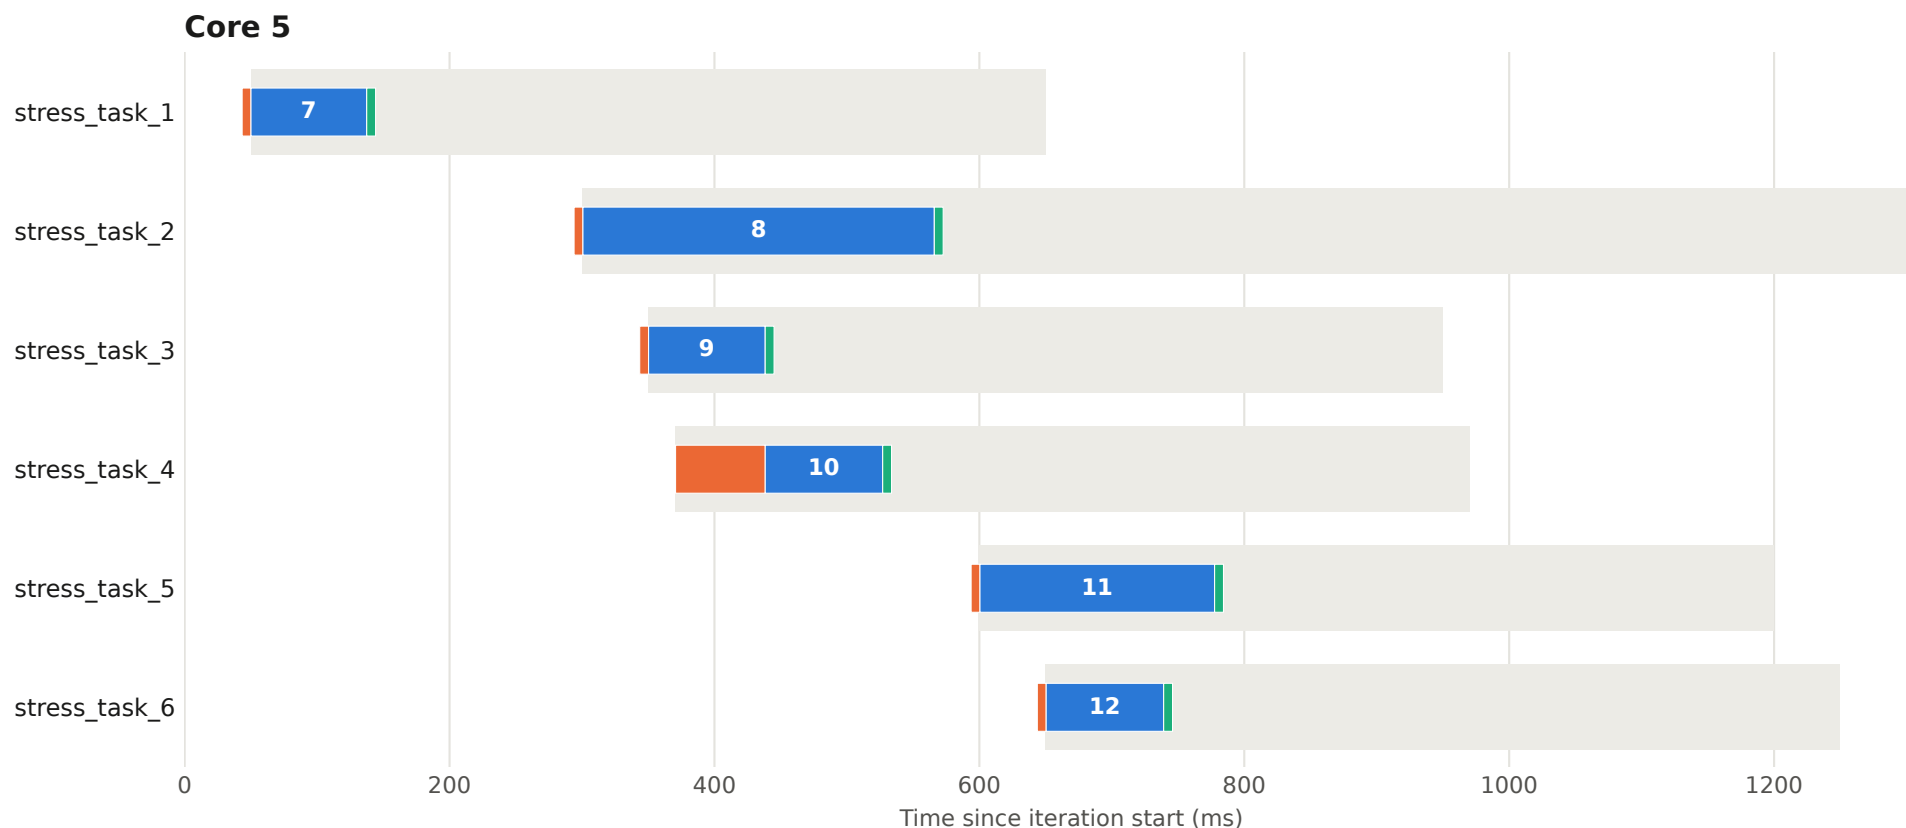

# Execution plan - iteration 19 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

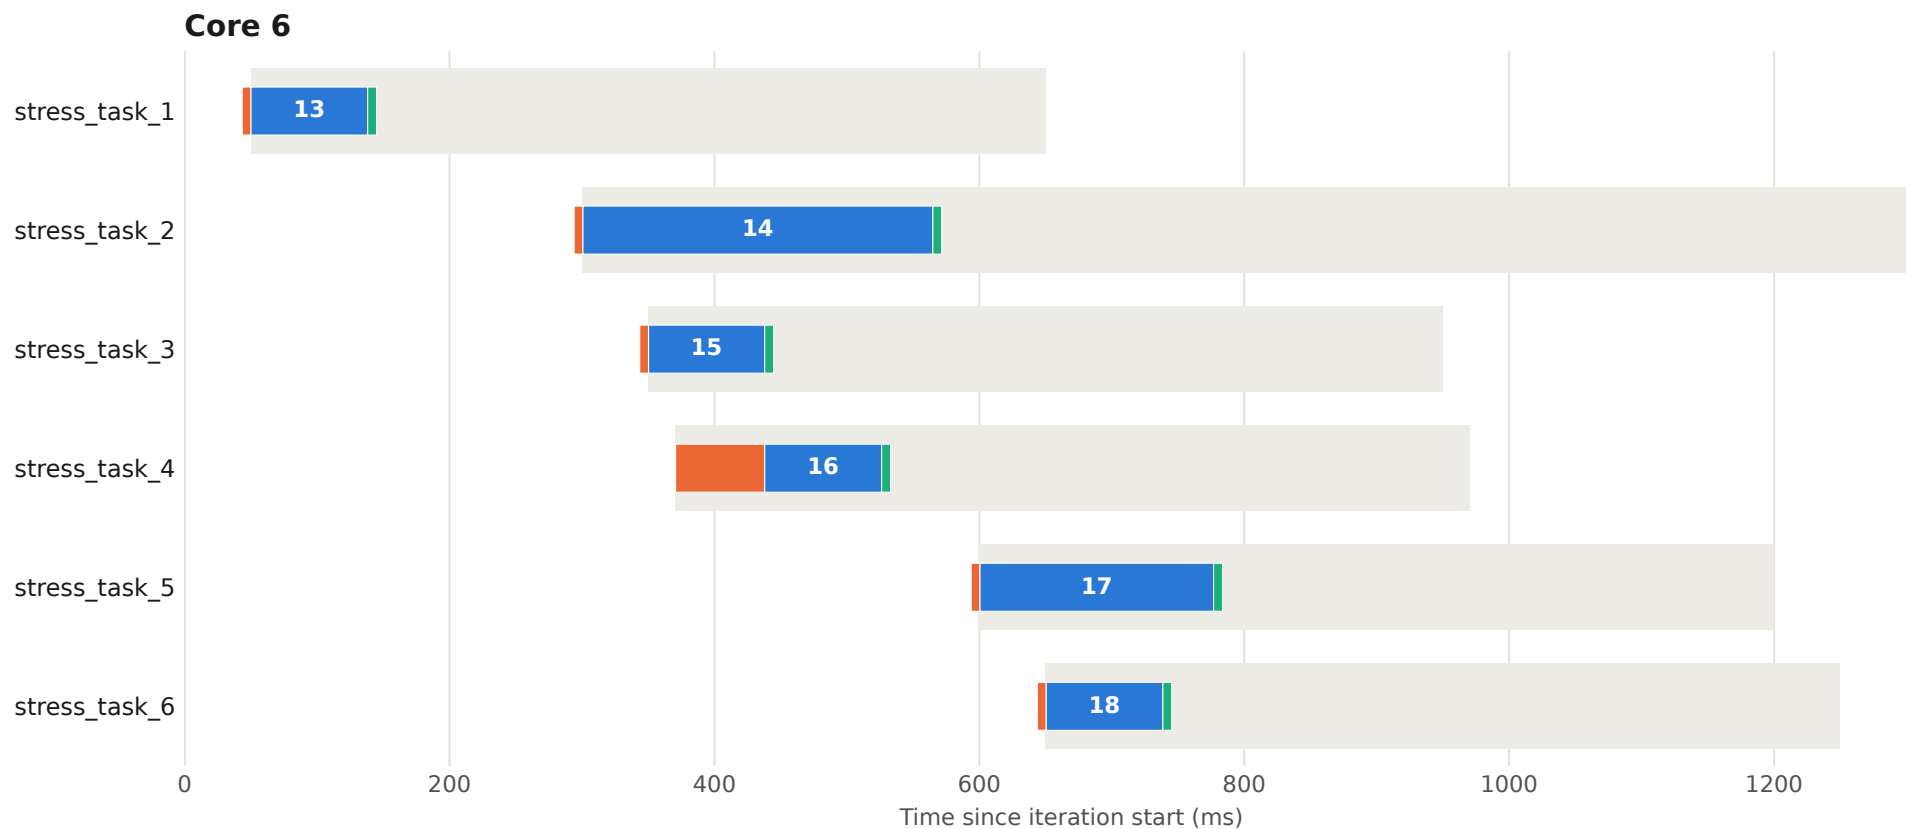


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 19 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

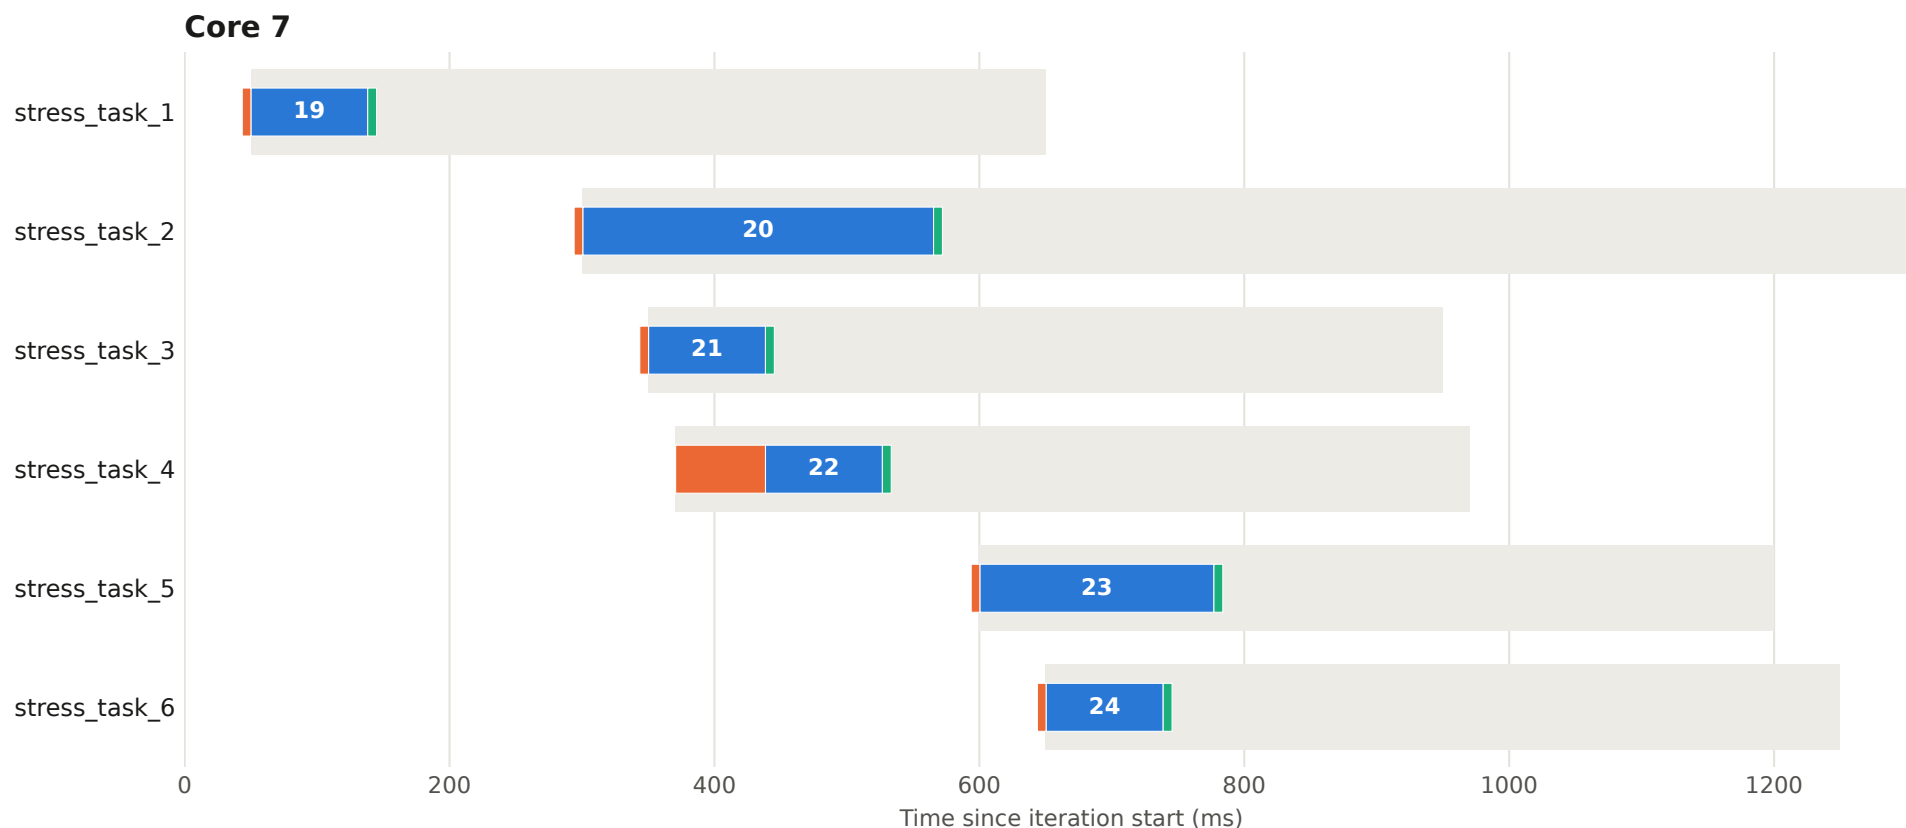


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 20 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

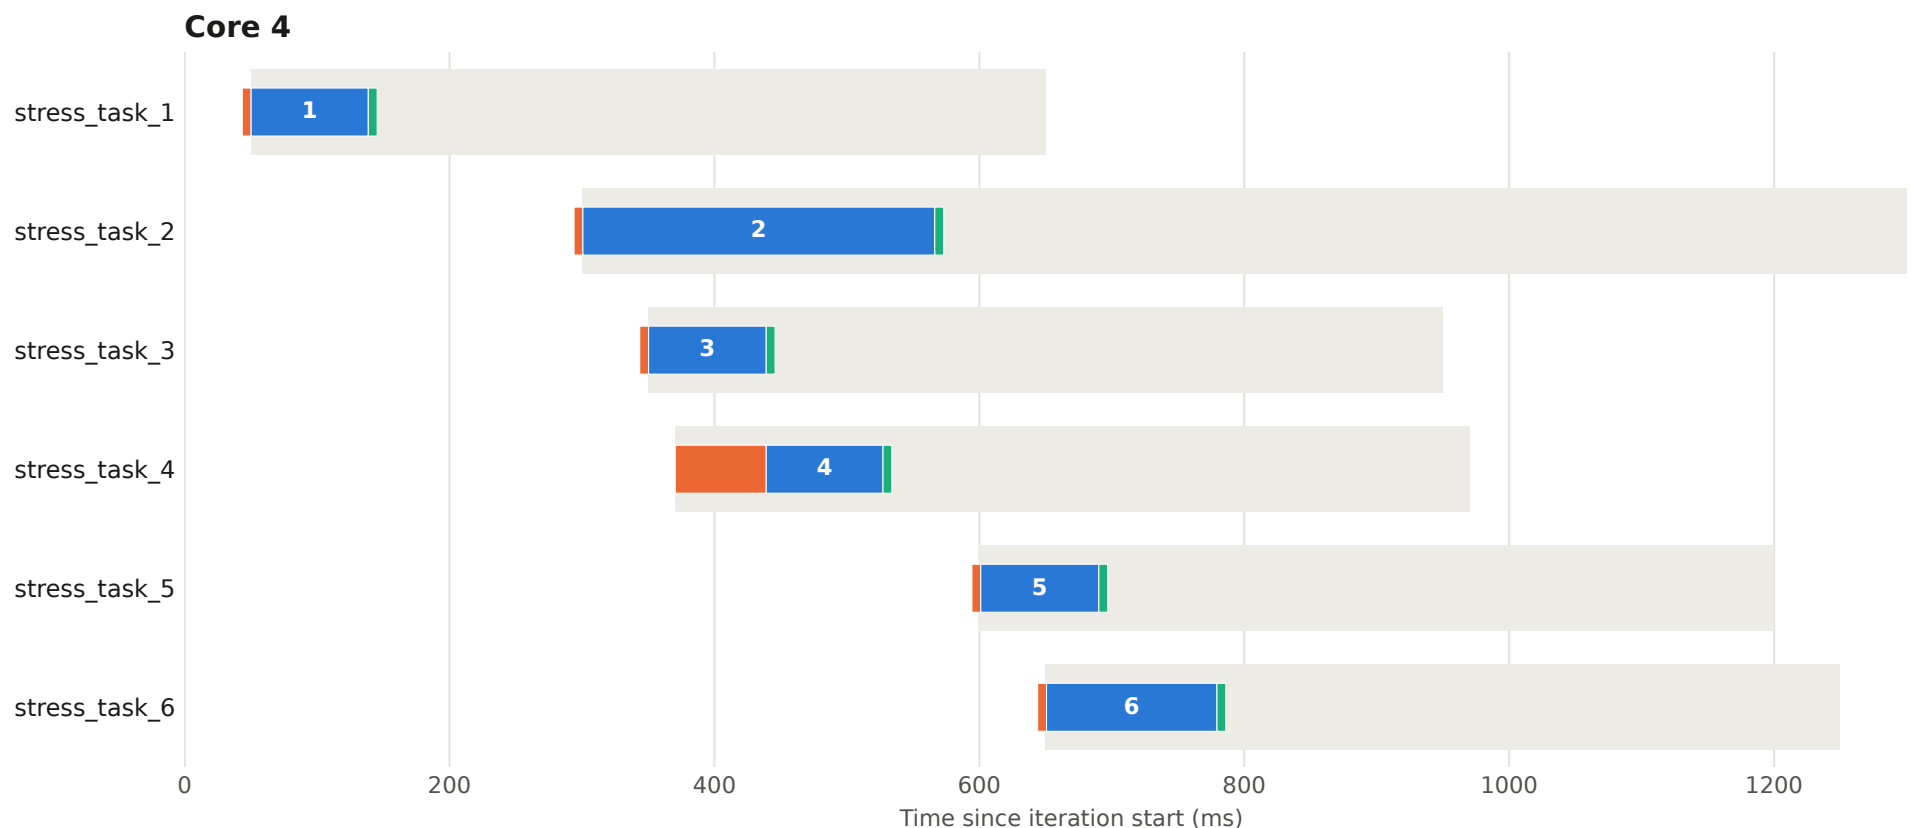


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 20 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

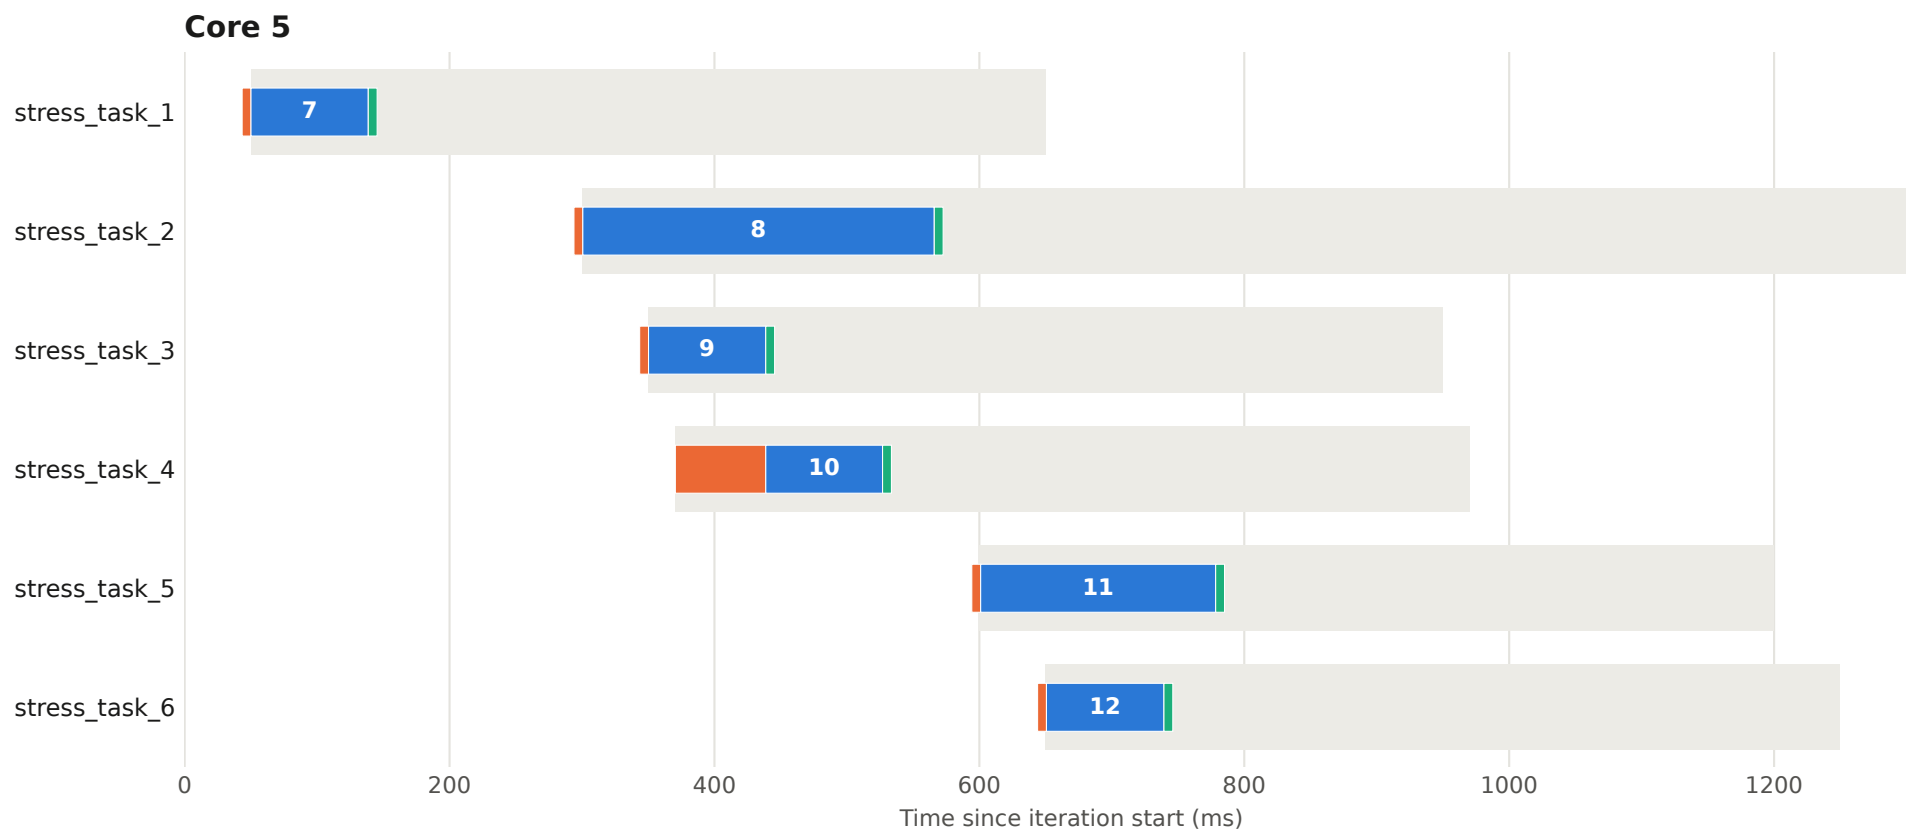


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 20 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

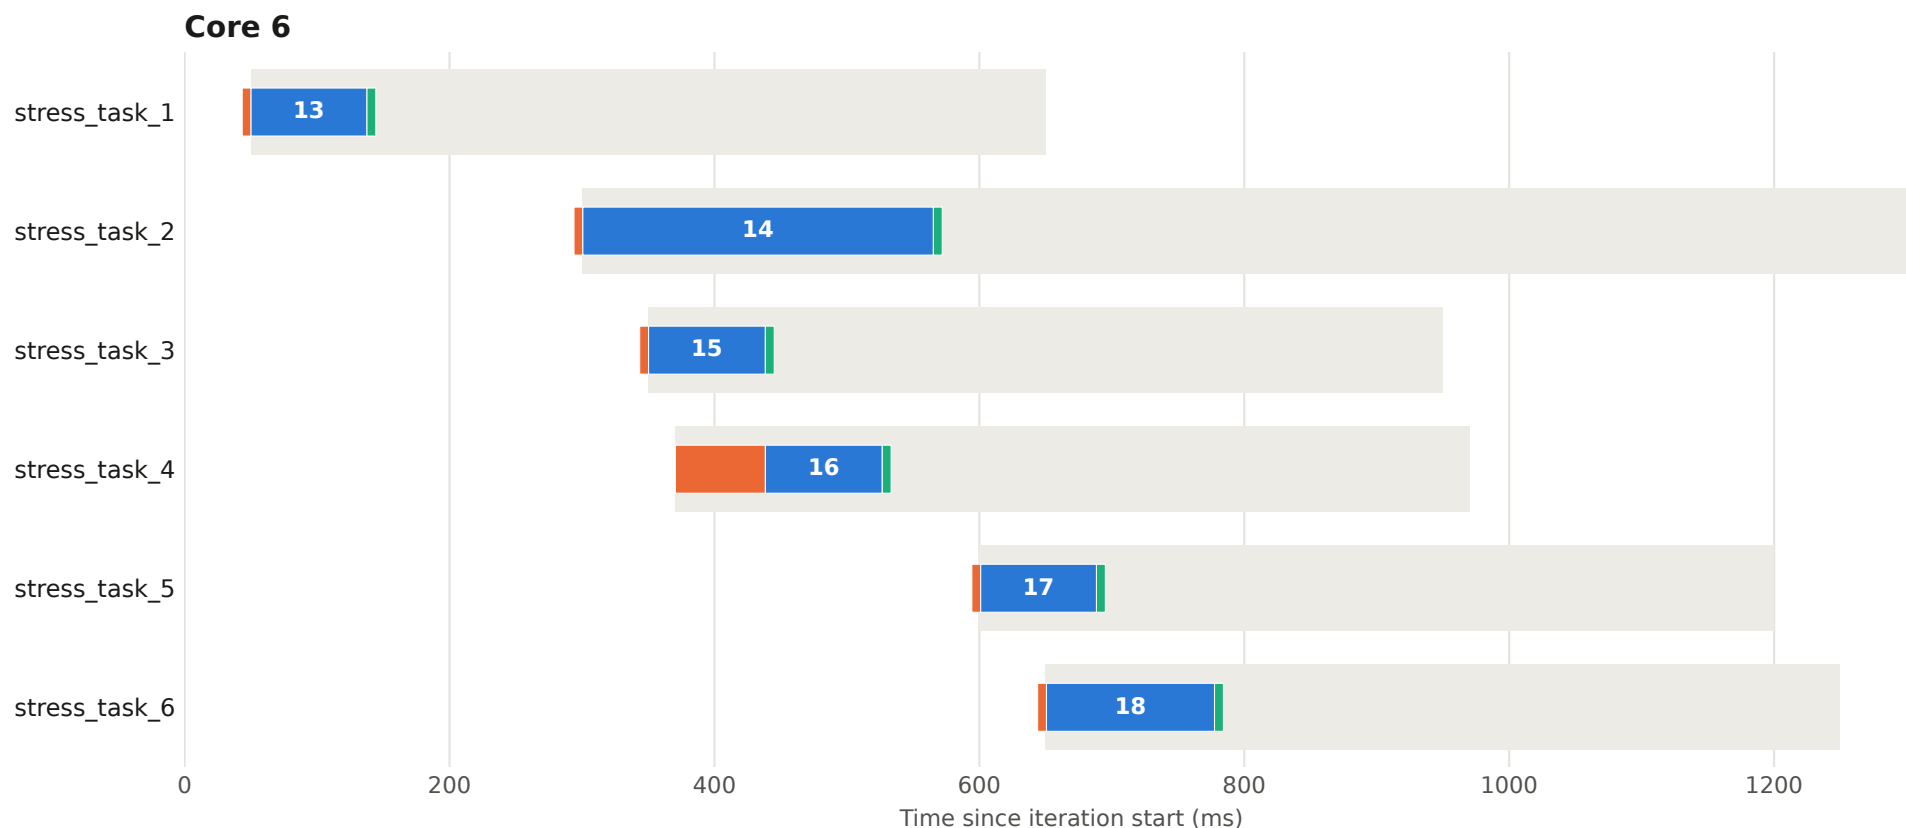


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 20 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

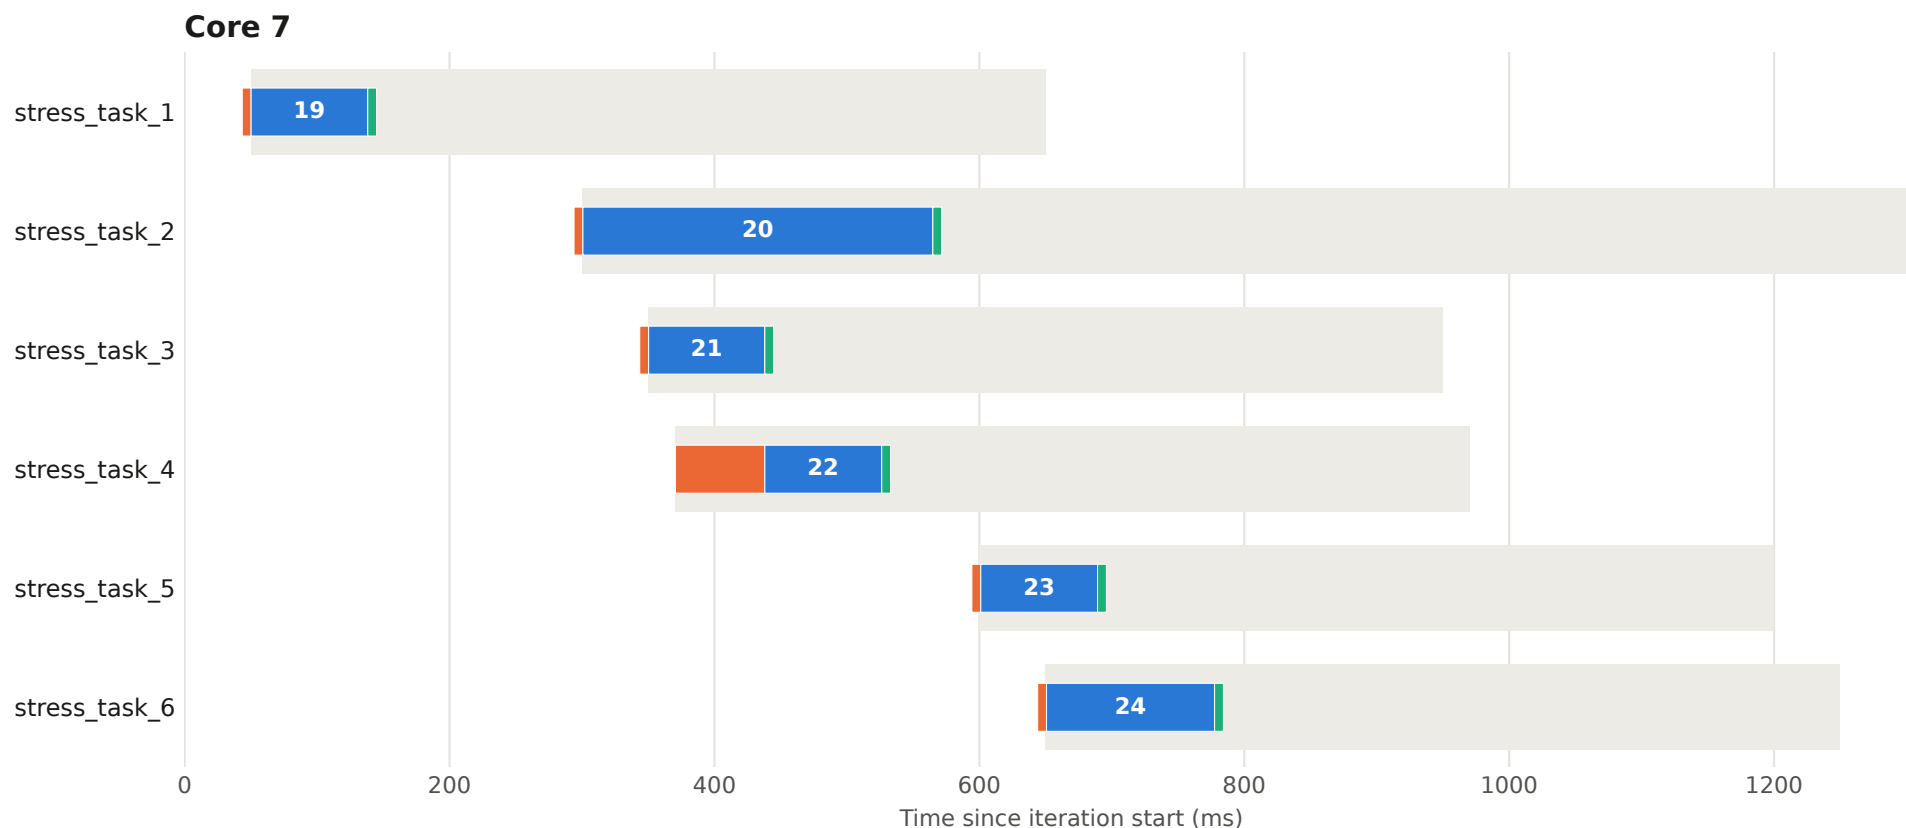


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 21 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

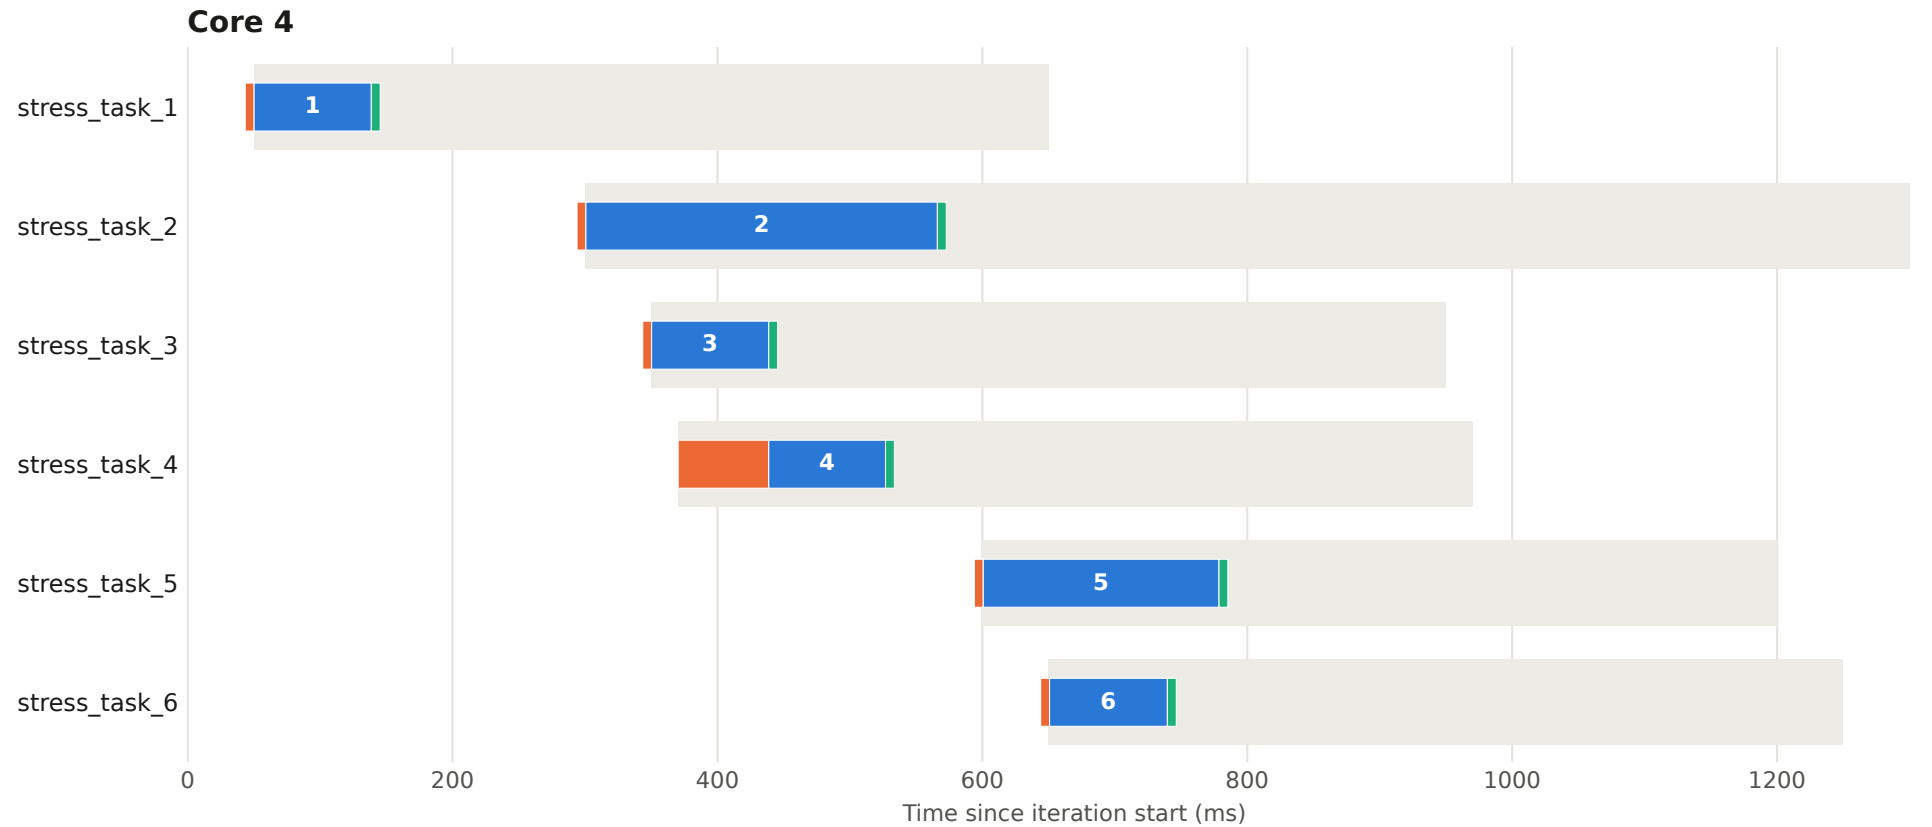


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 21 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

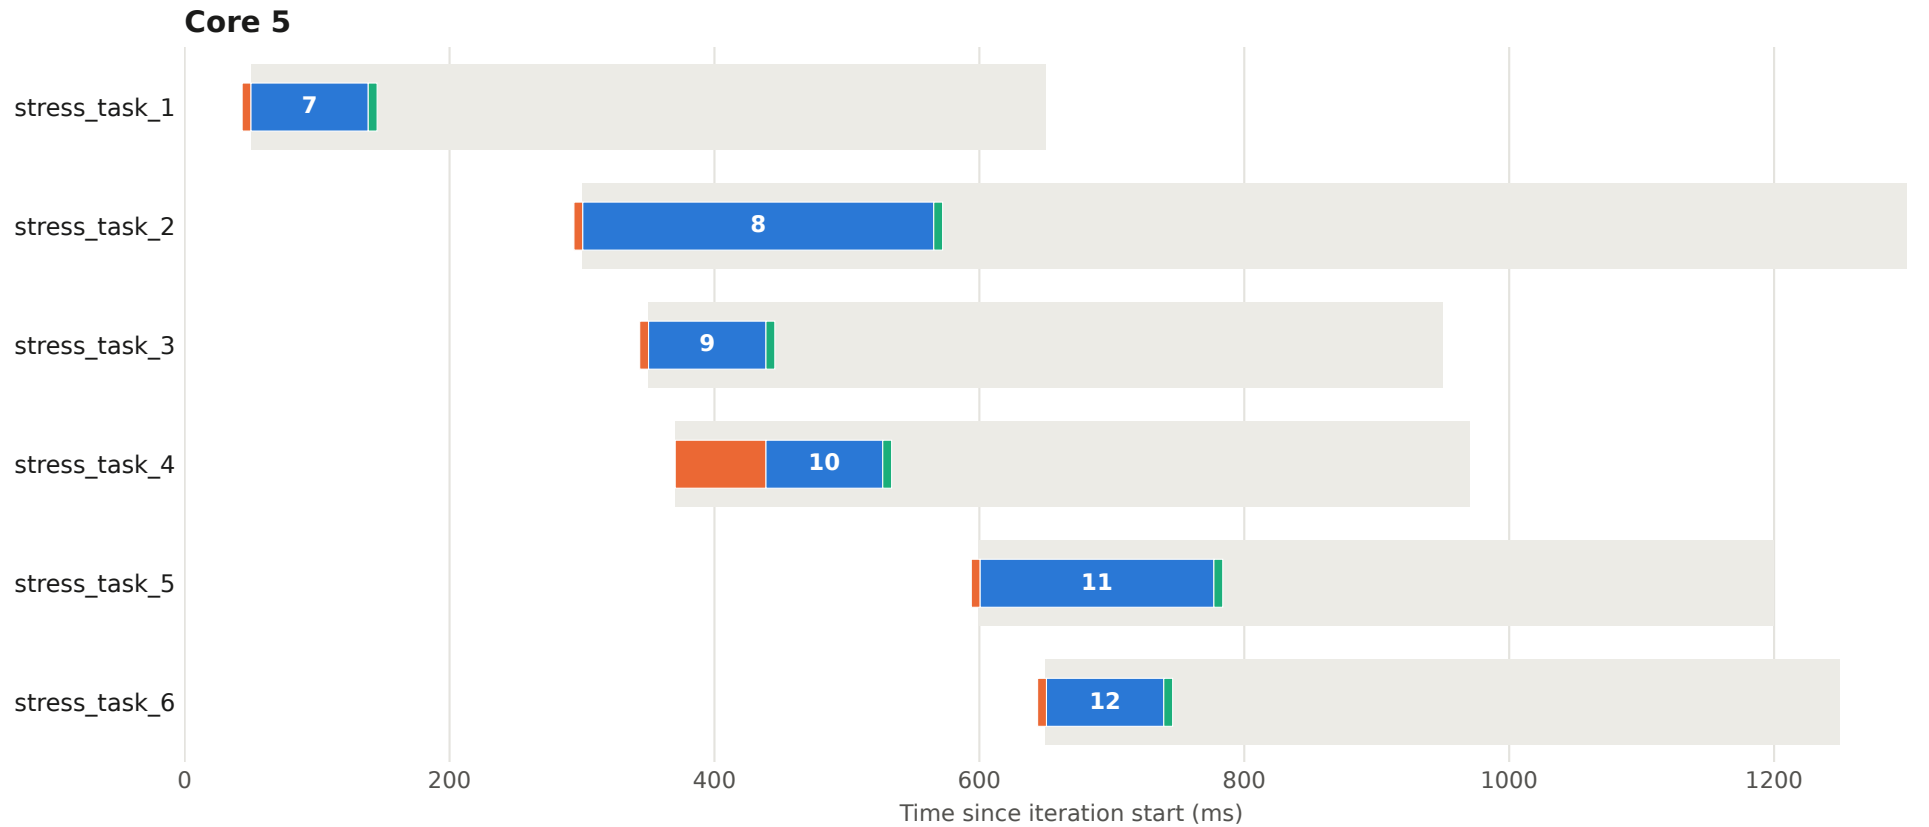


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 21 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

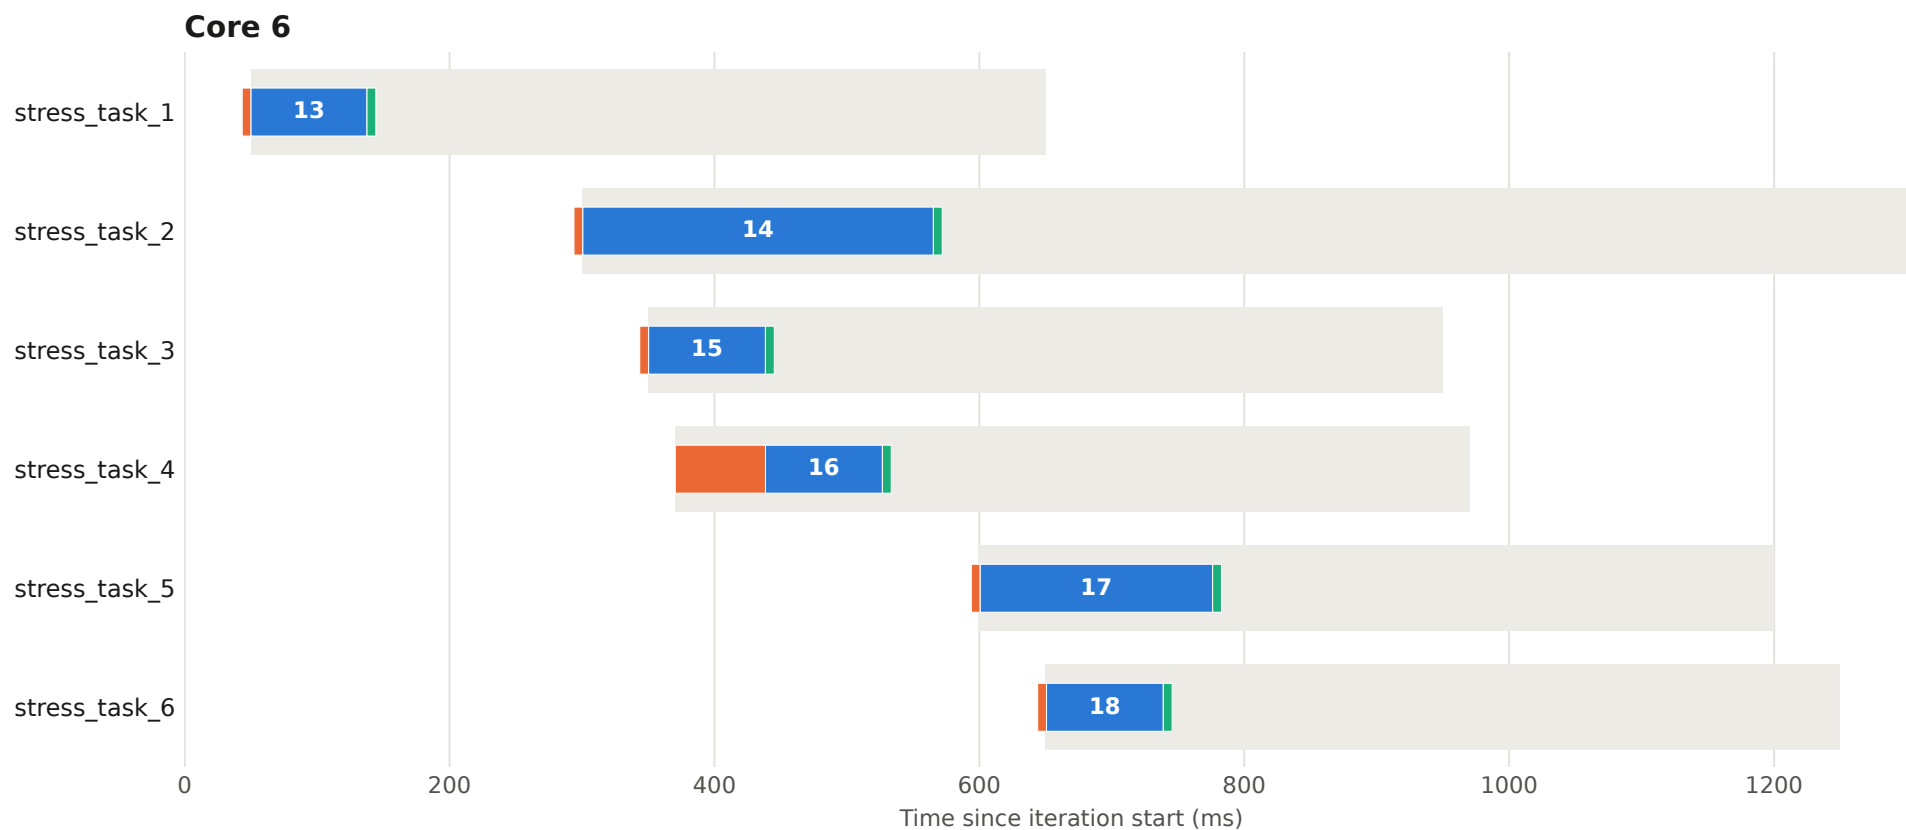


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 21 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

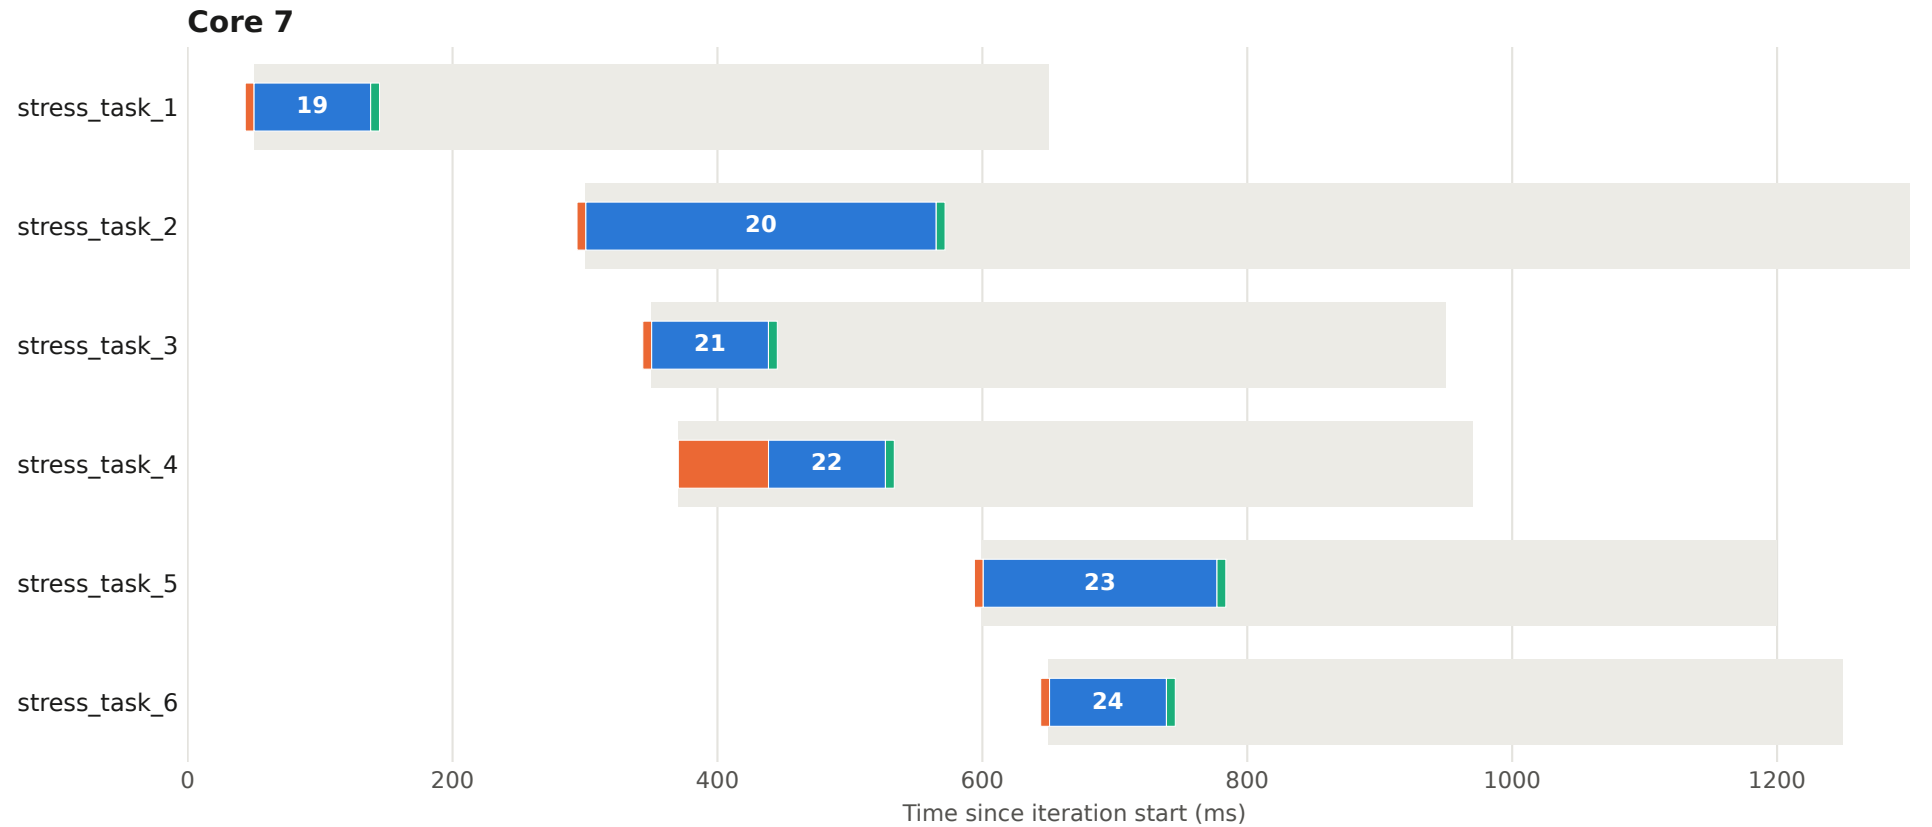


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 22 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

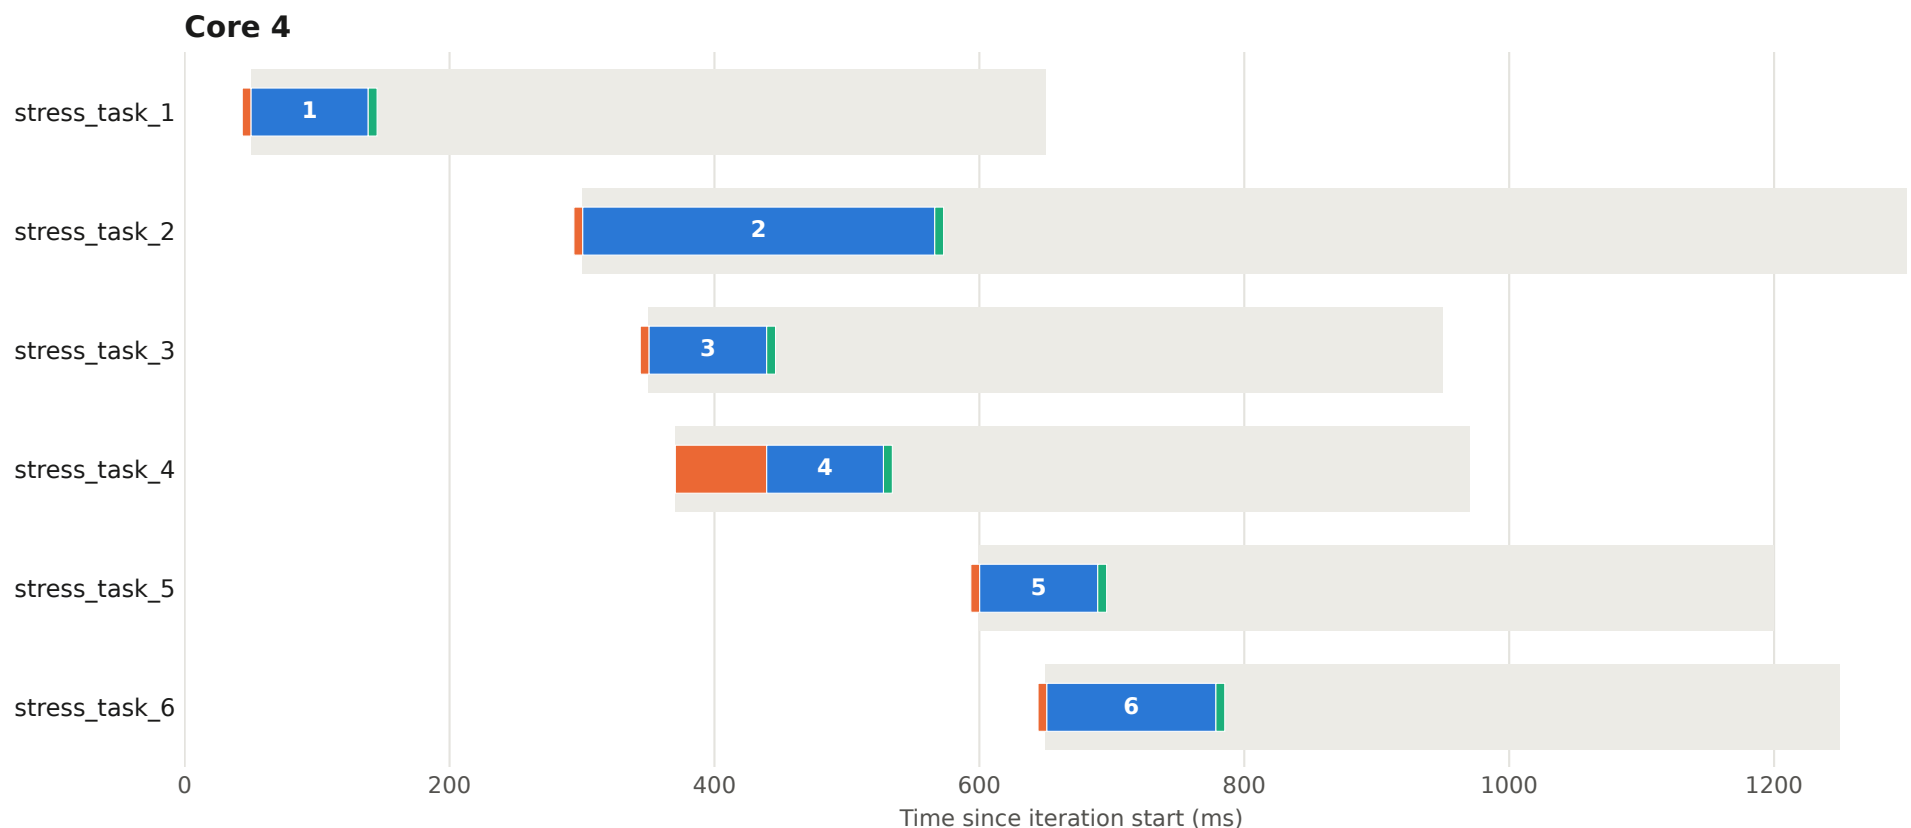


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 22 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

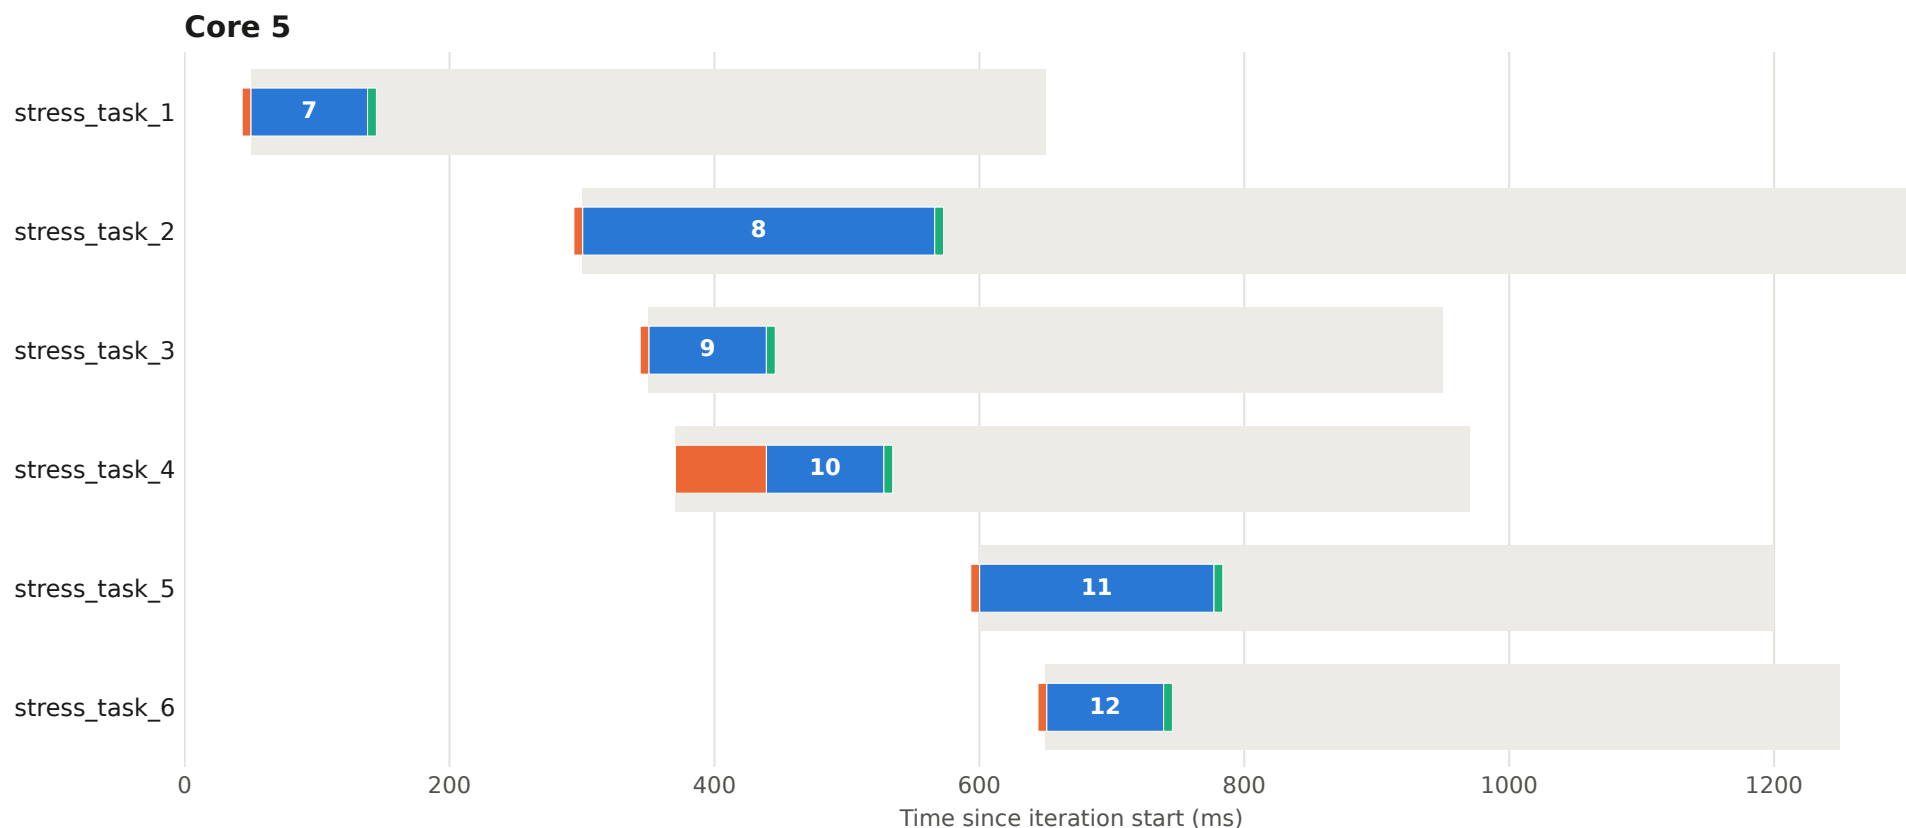


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 22 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

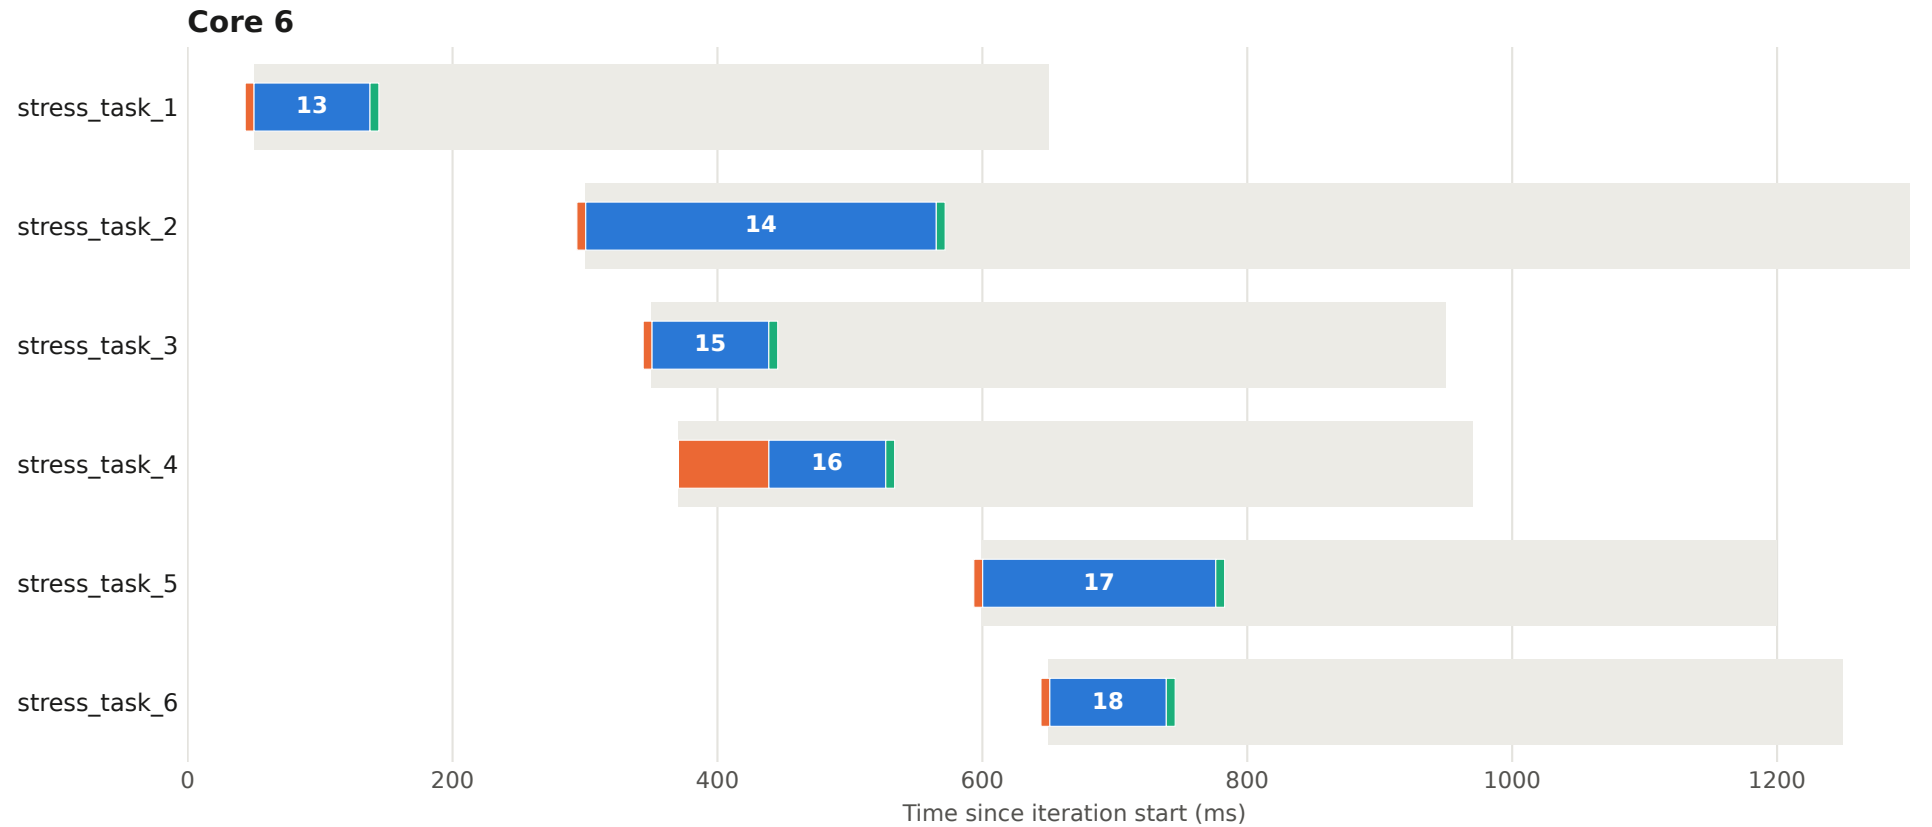


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 22 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

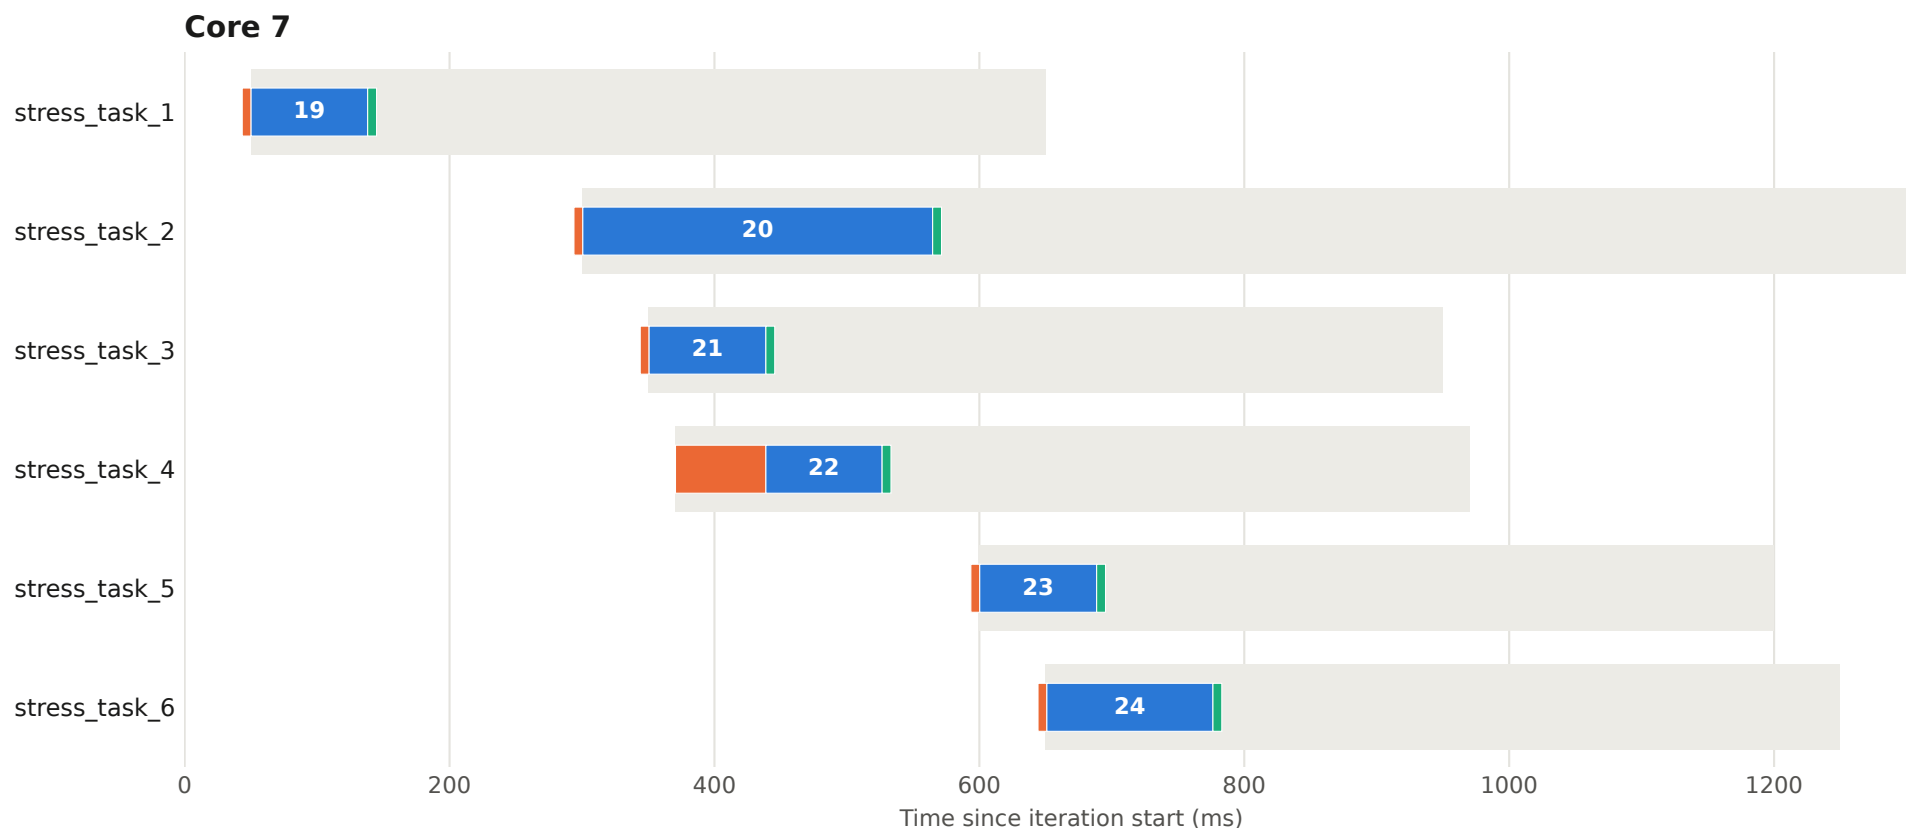


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 23 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

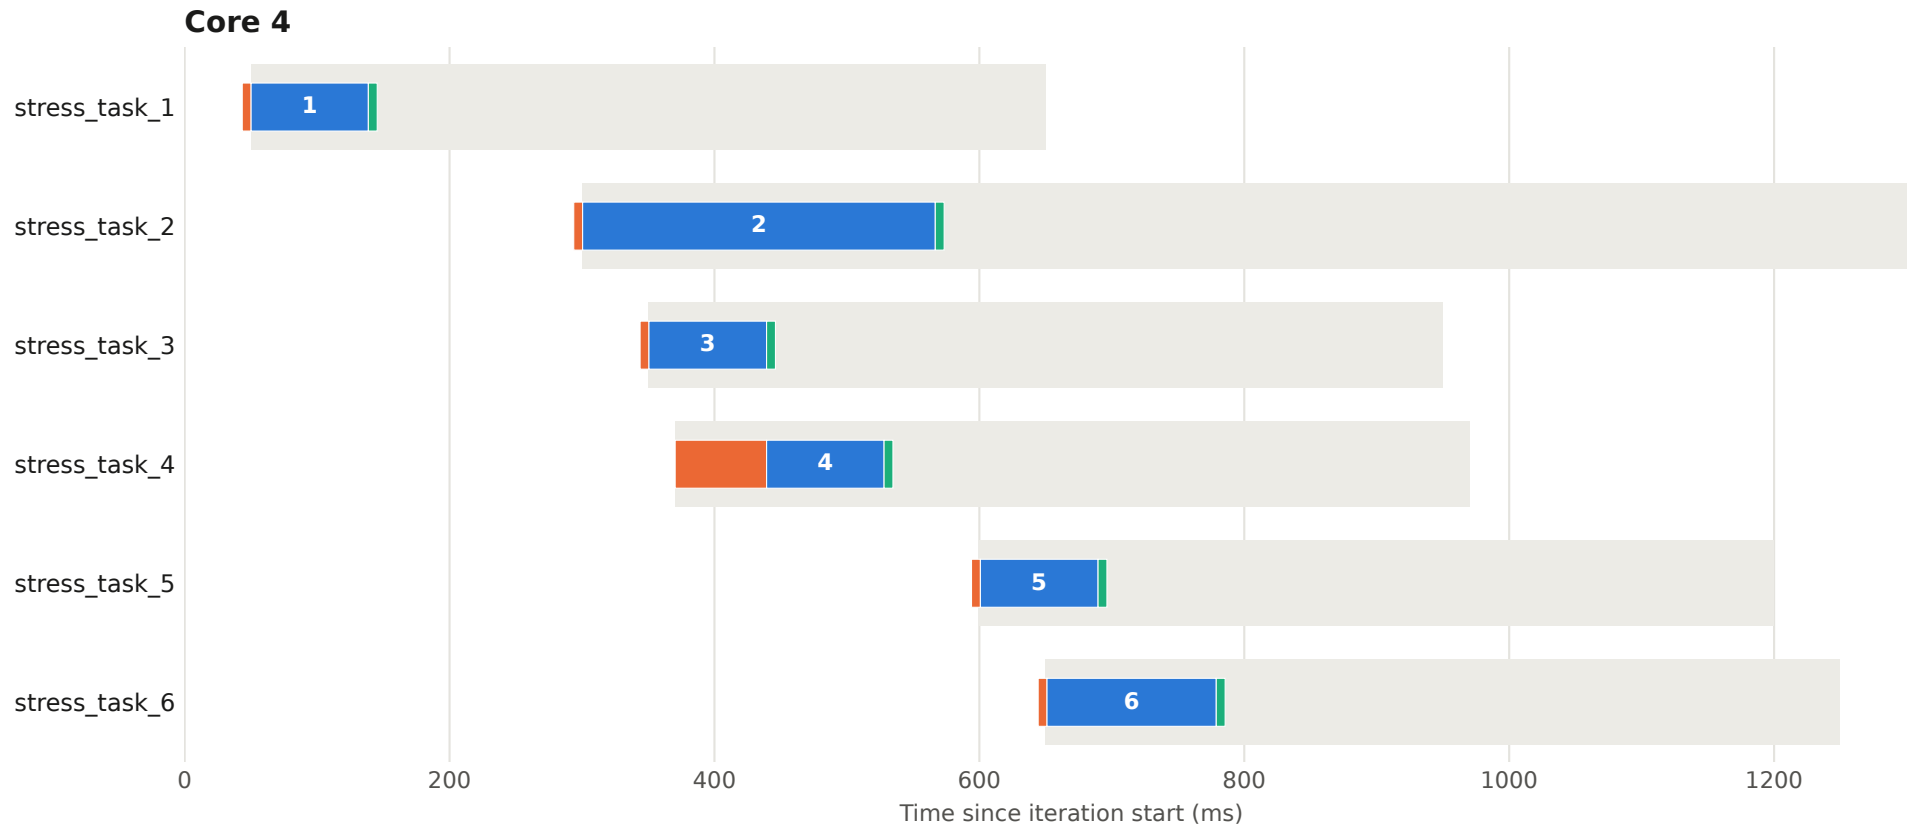


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 23 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

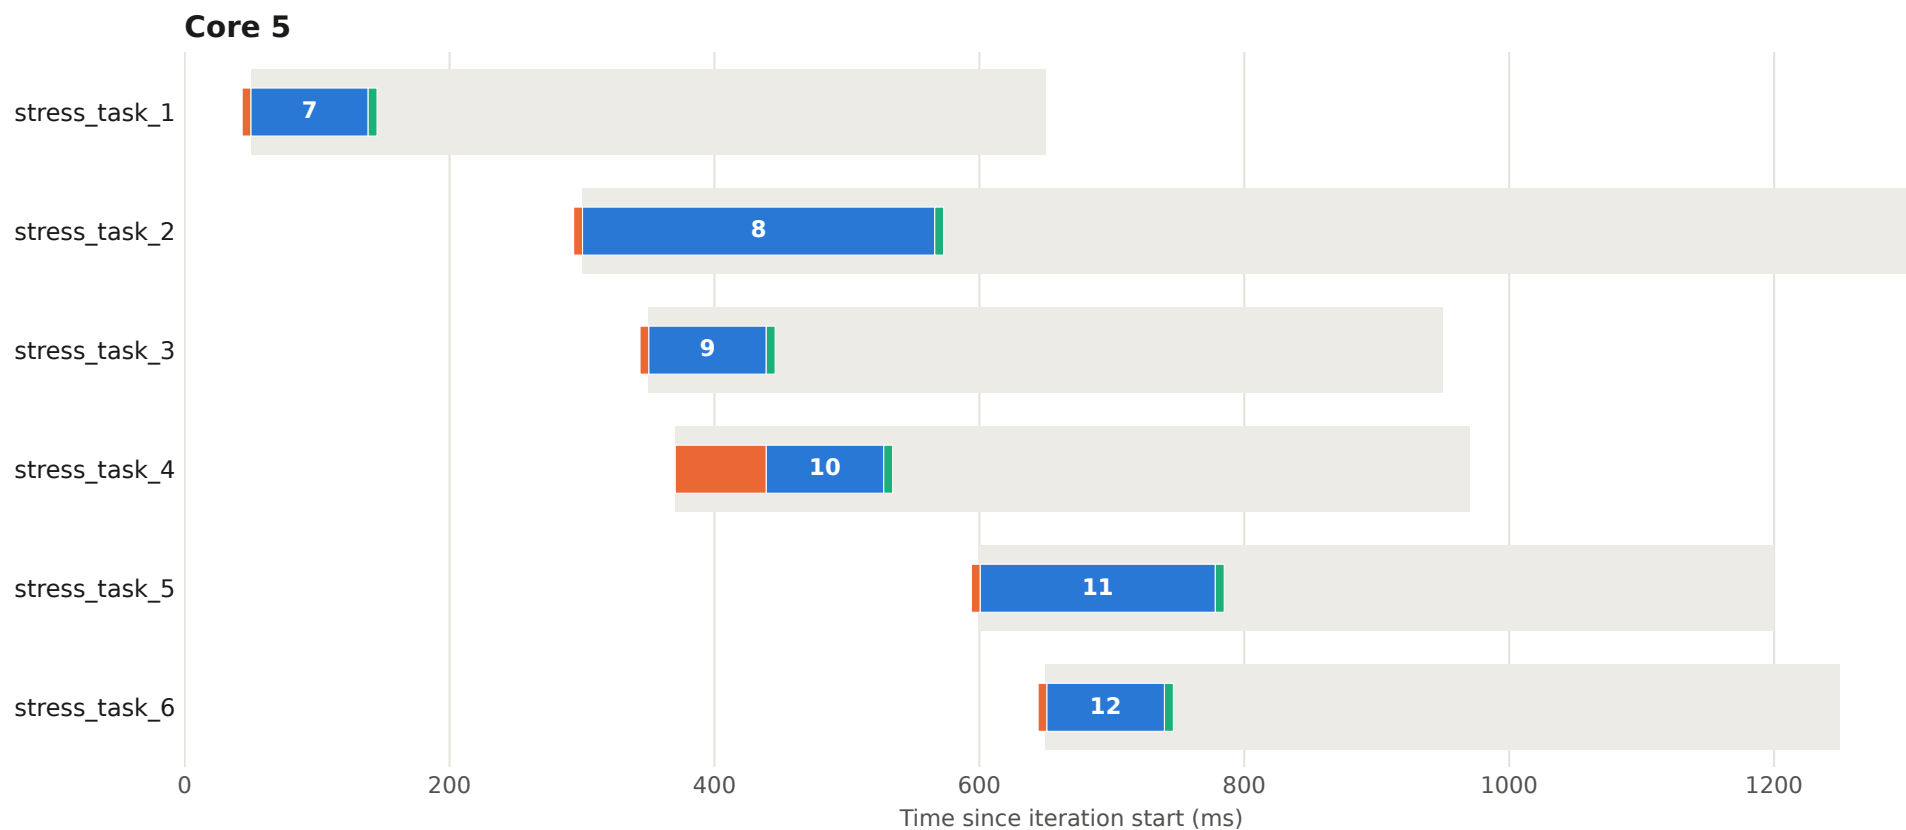


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 23 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

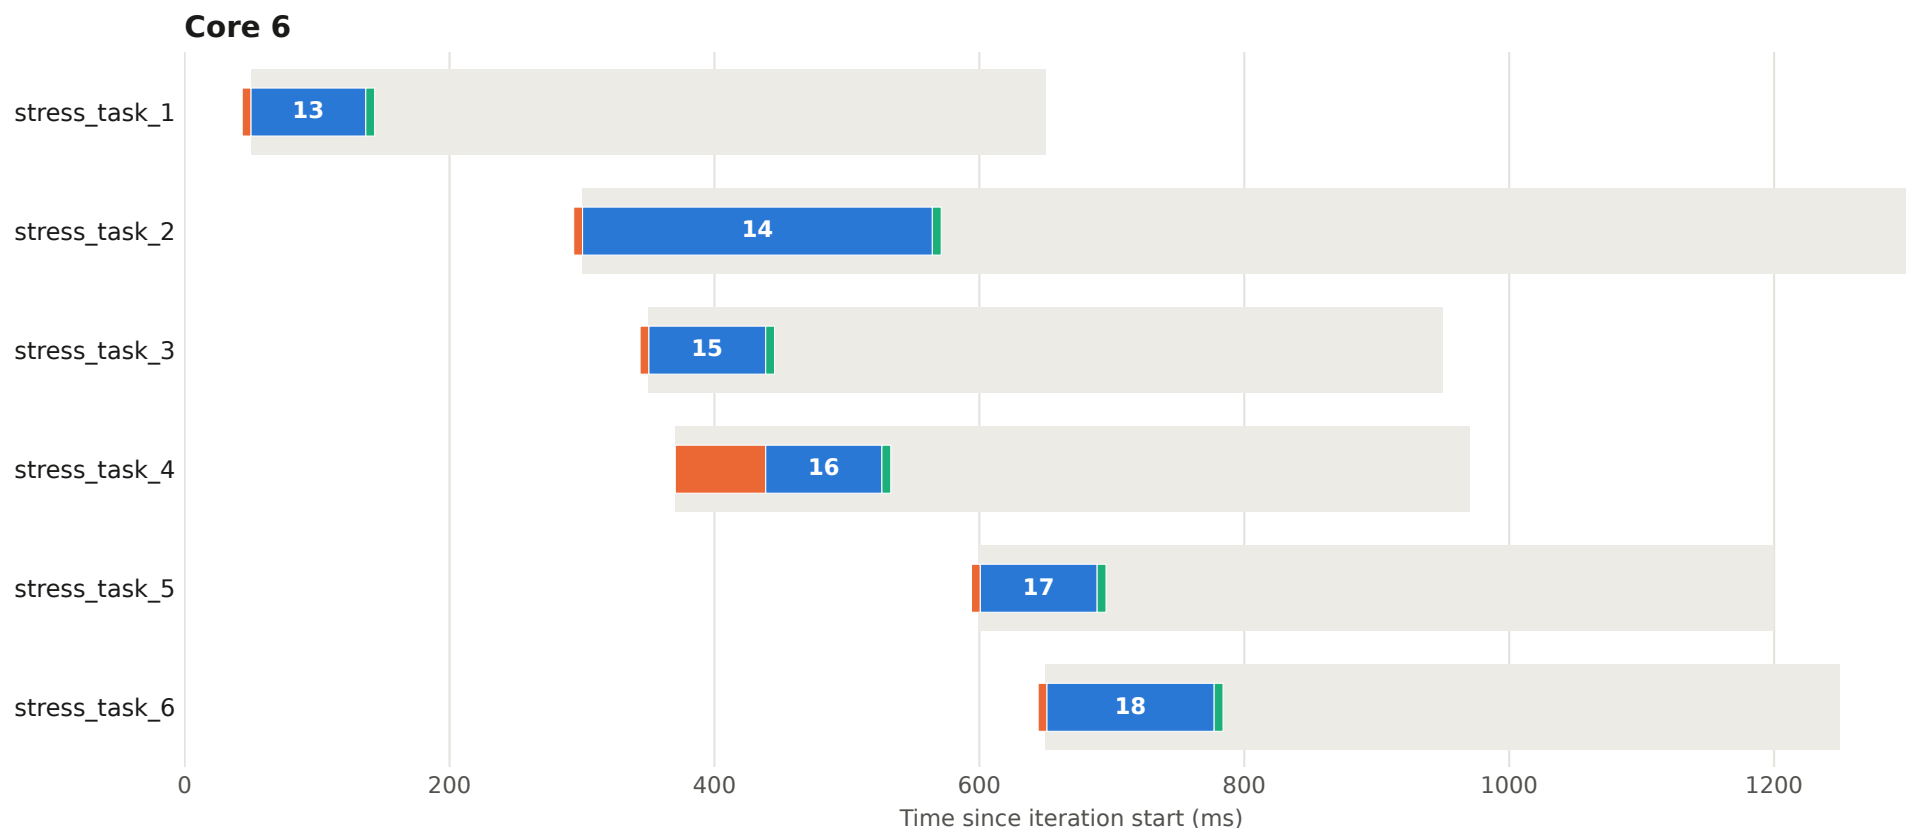


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 23 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

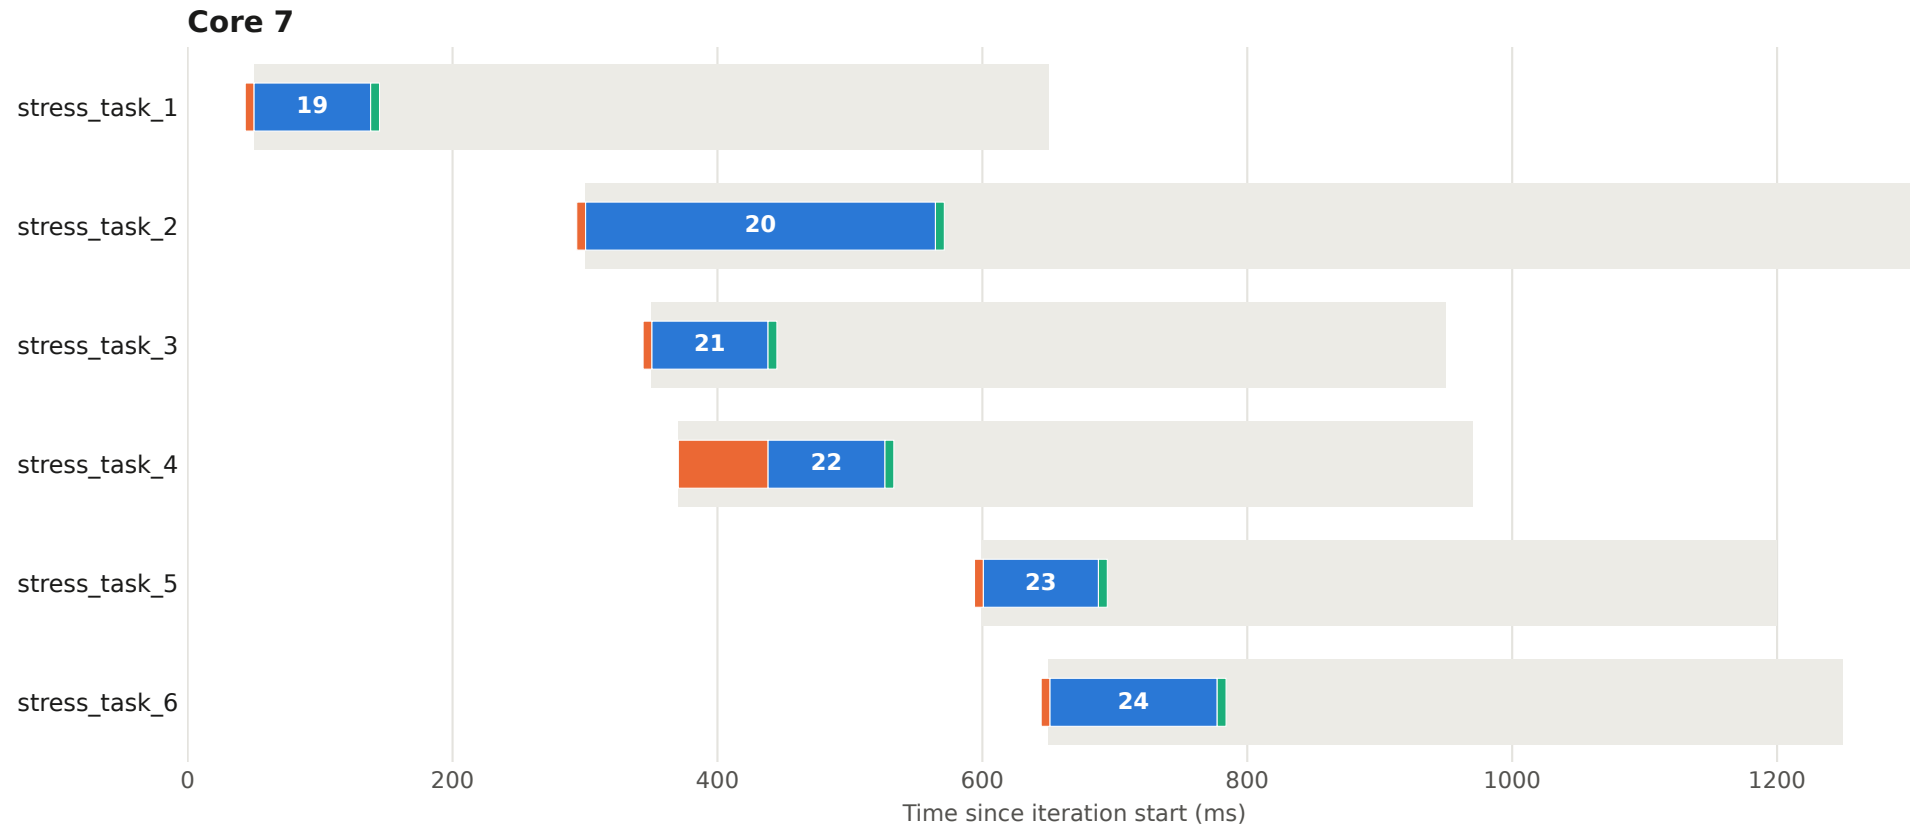


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 24 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

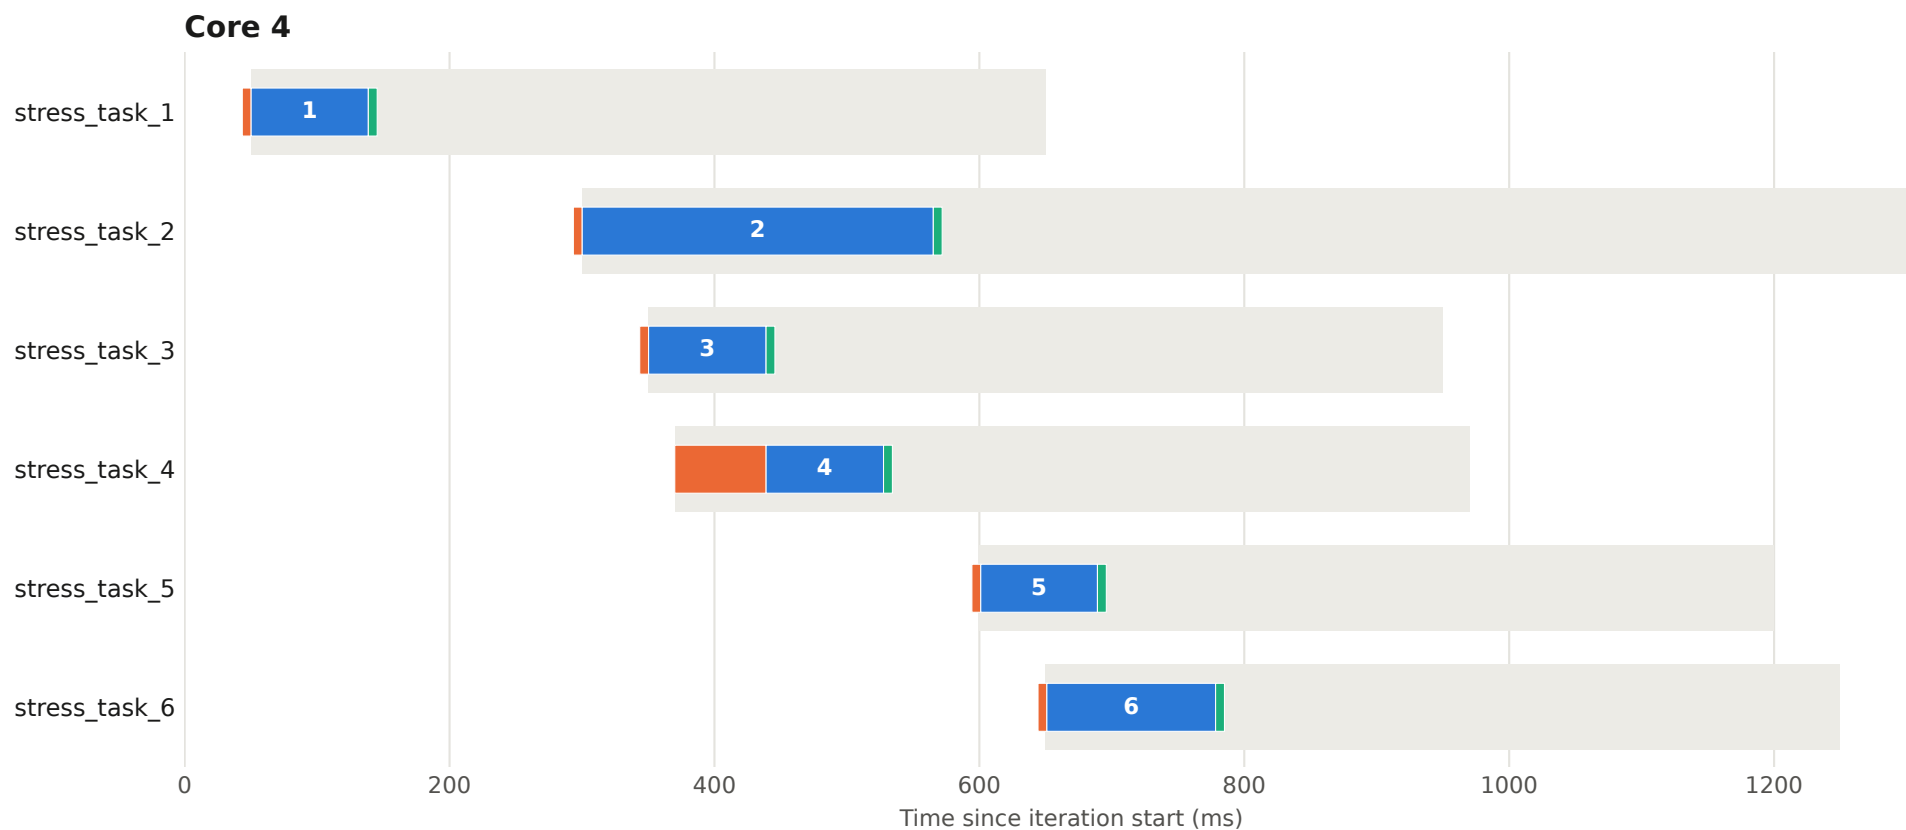


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 24 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

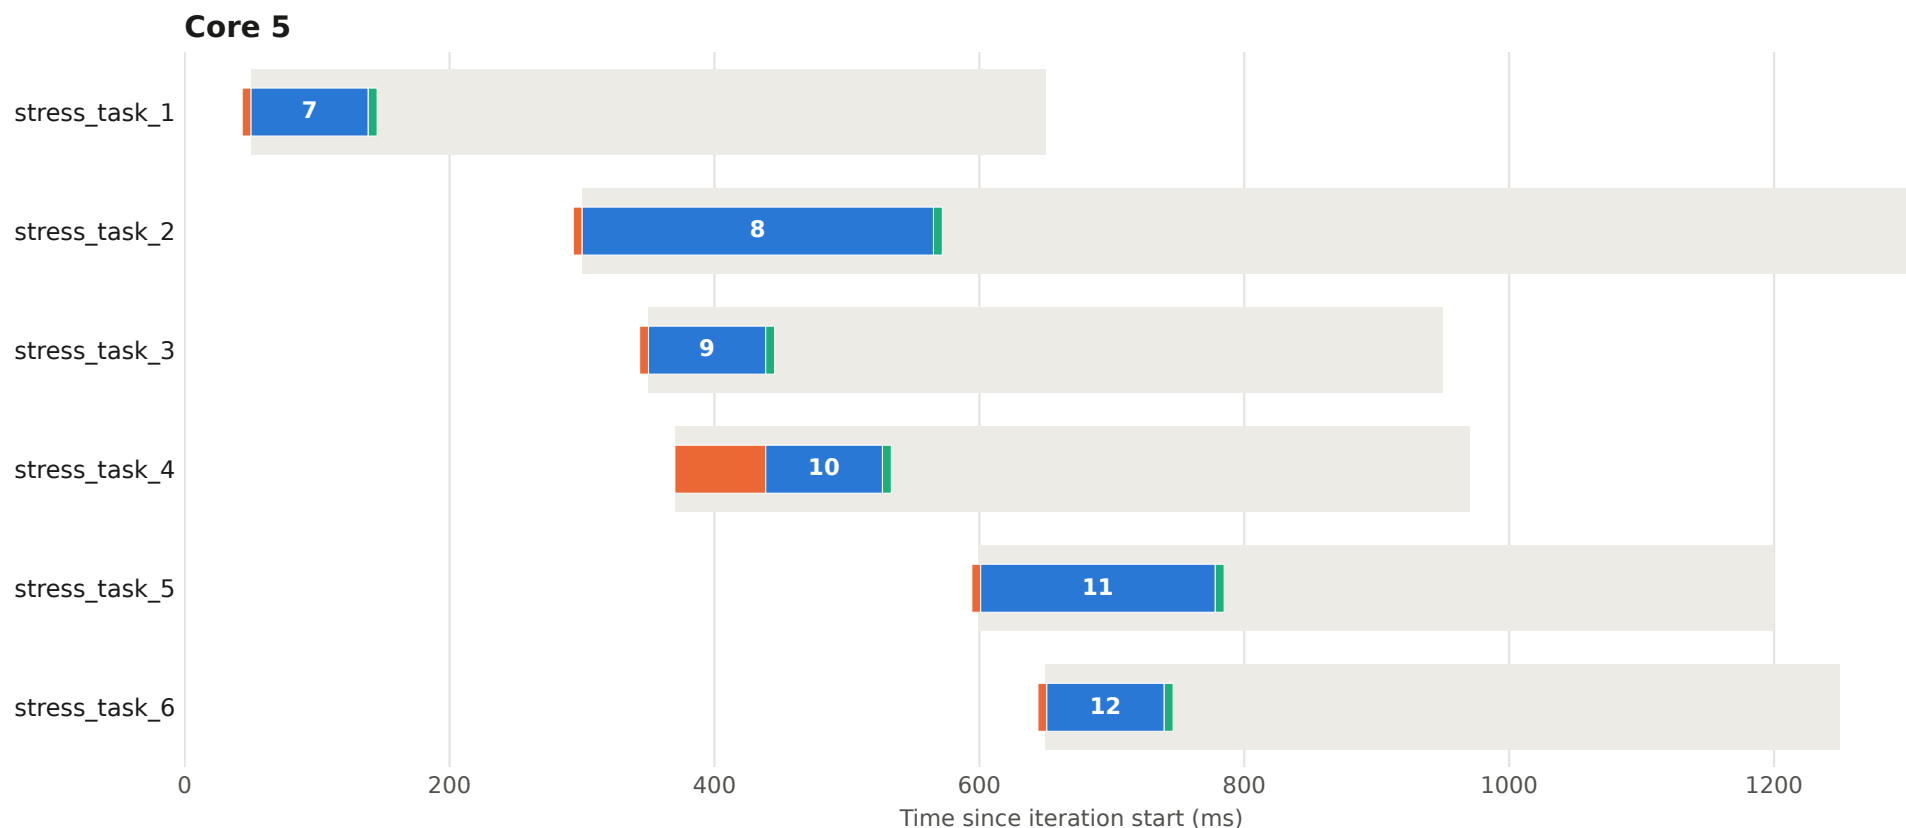


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 24 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

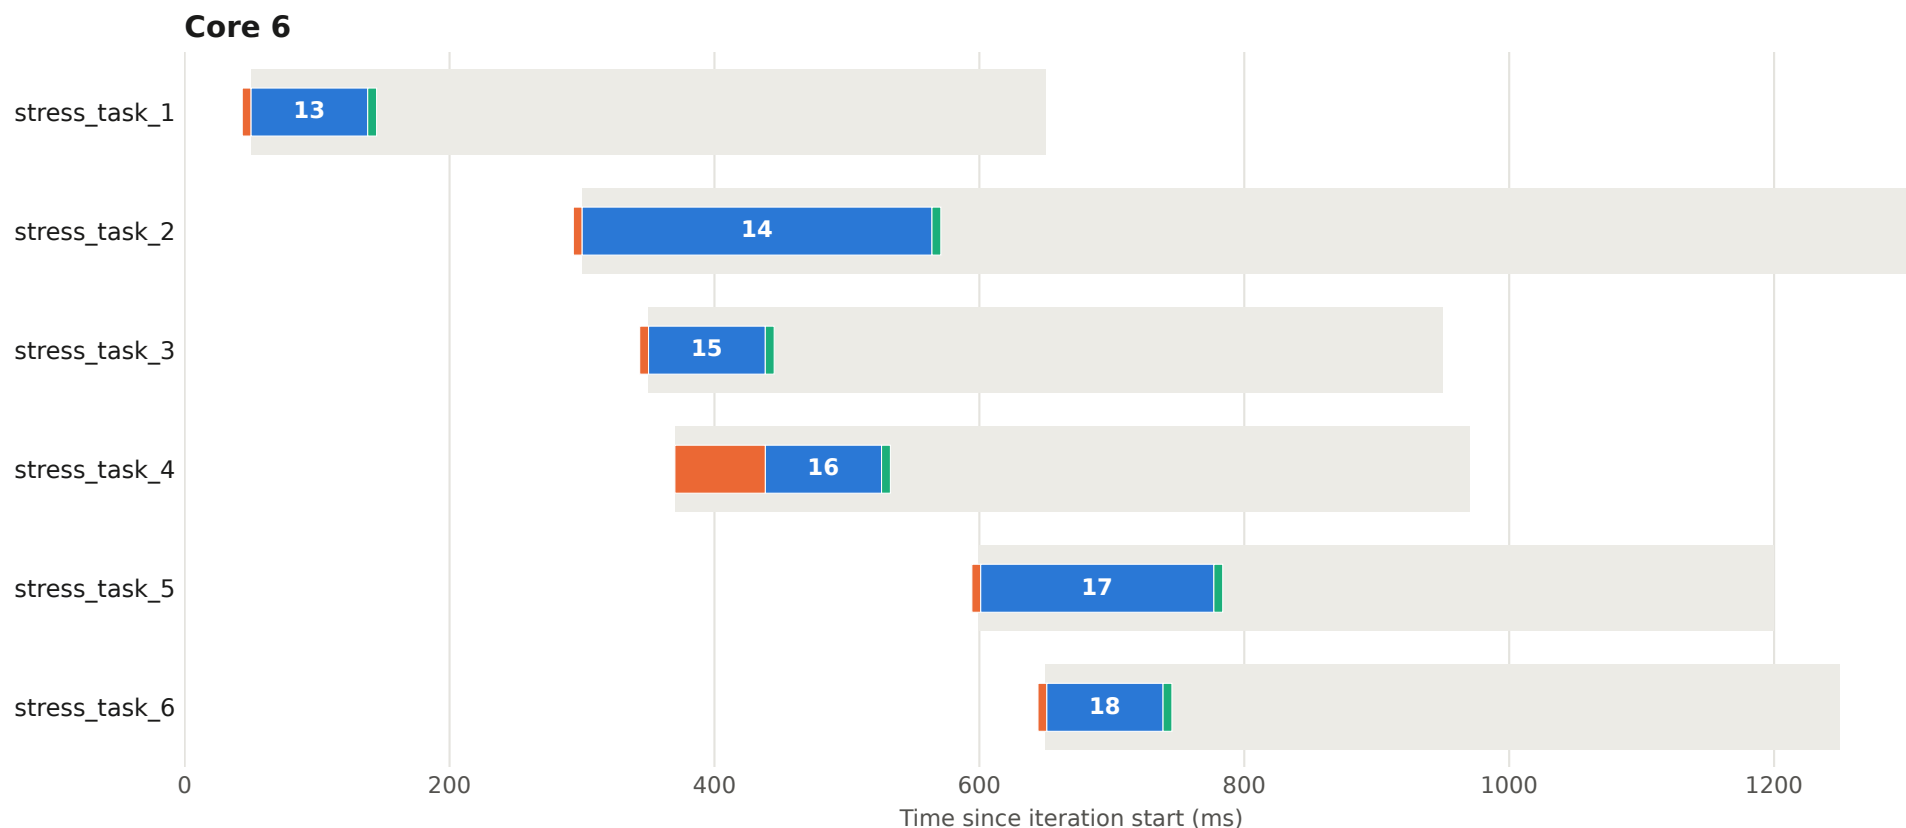


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 24 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

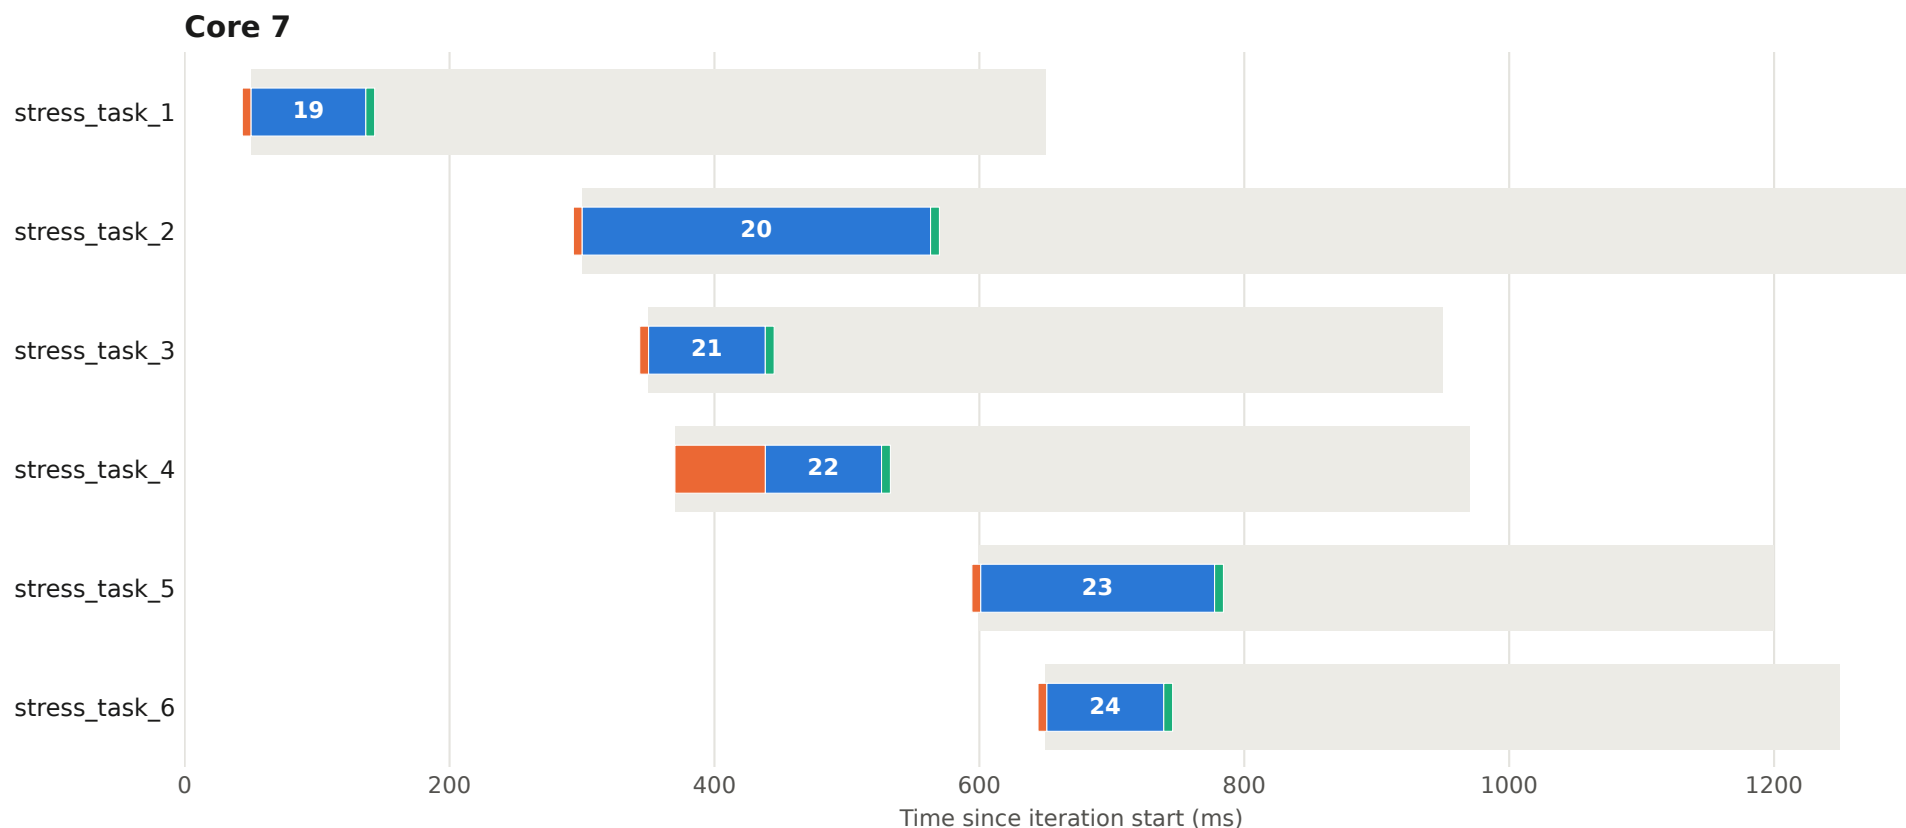


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 25 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

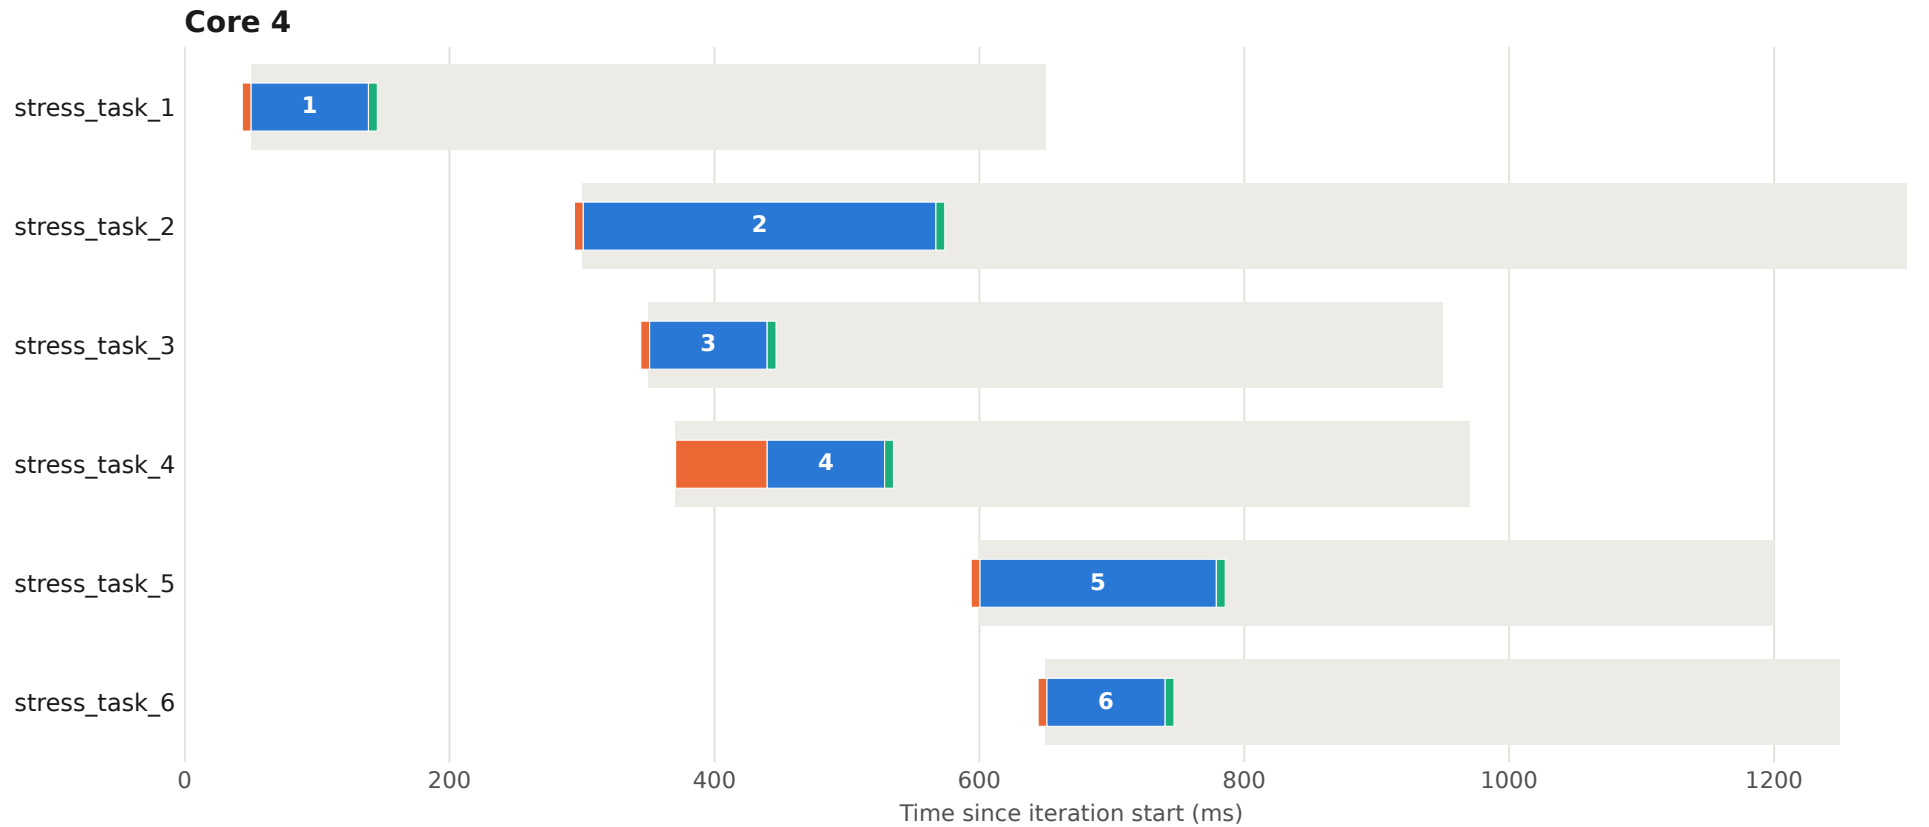


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 25 - core 5

One chart per core; each bar is one task call.


- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

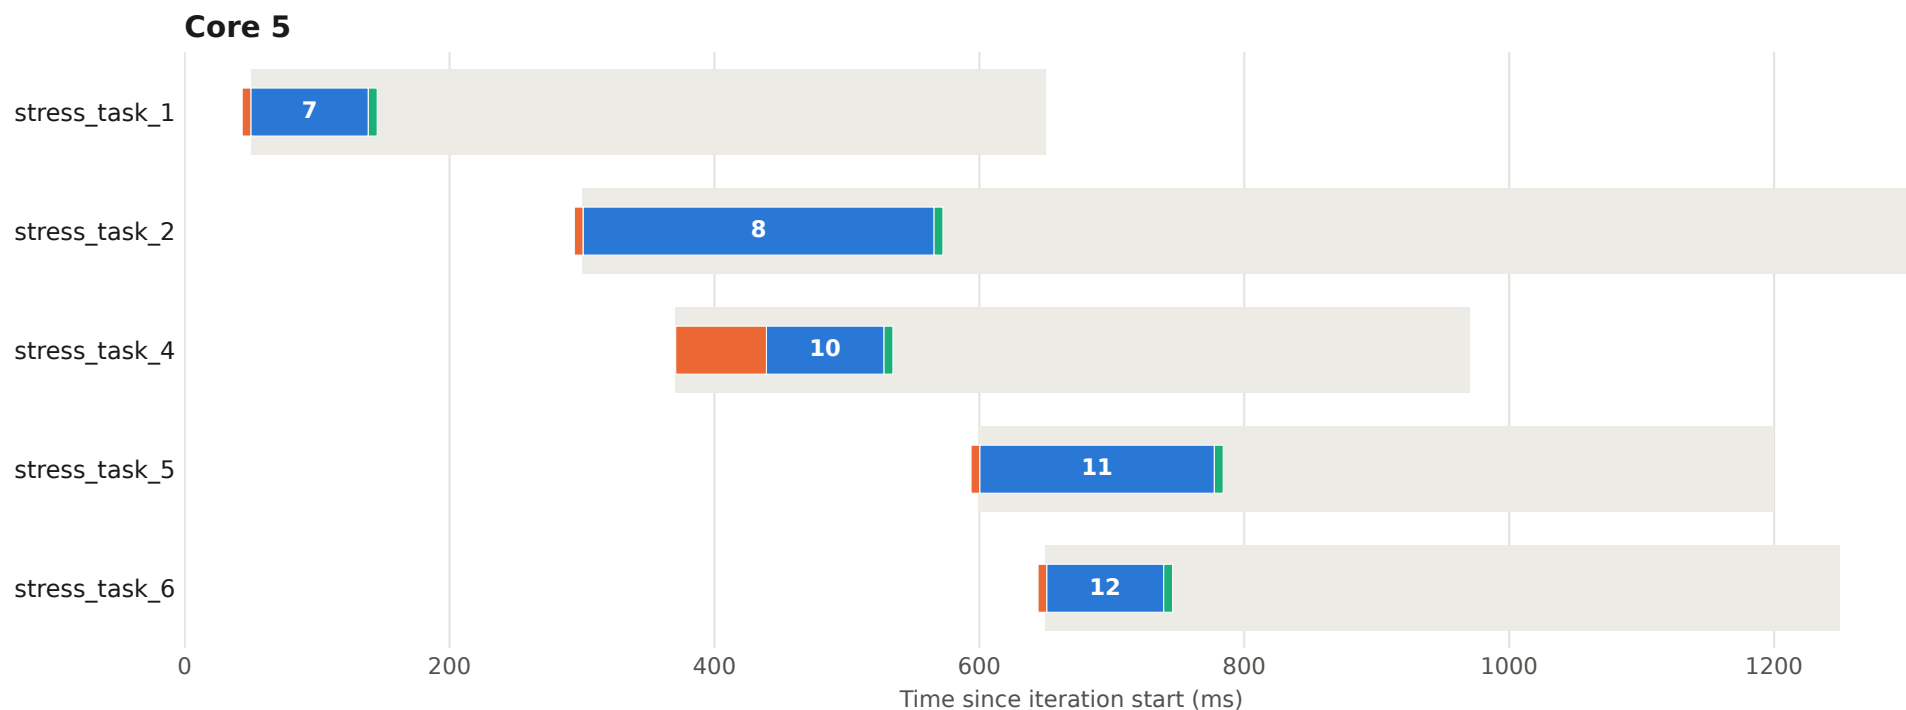

# Execution plan - iteration 25 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

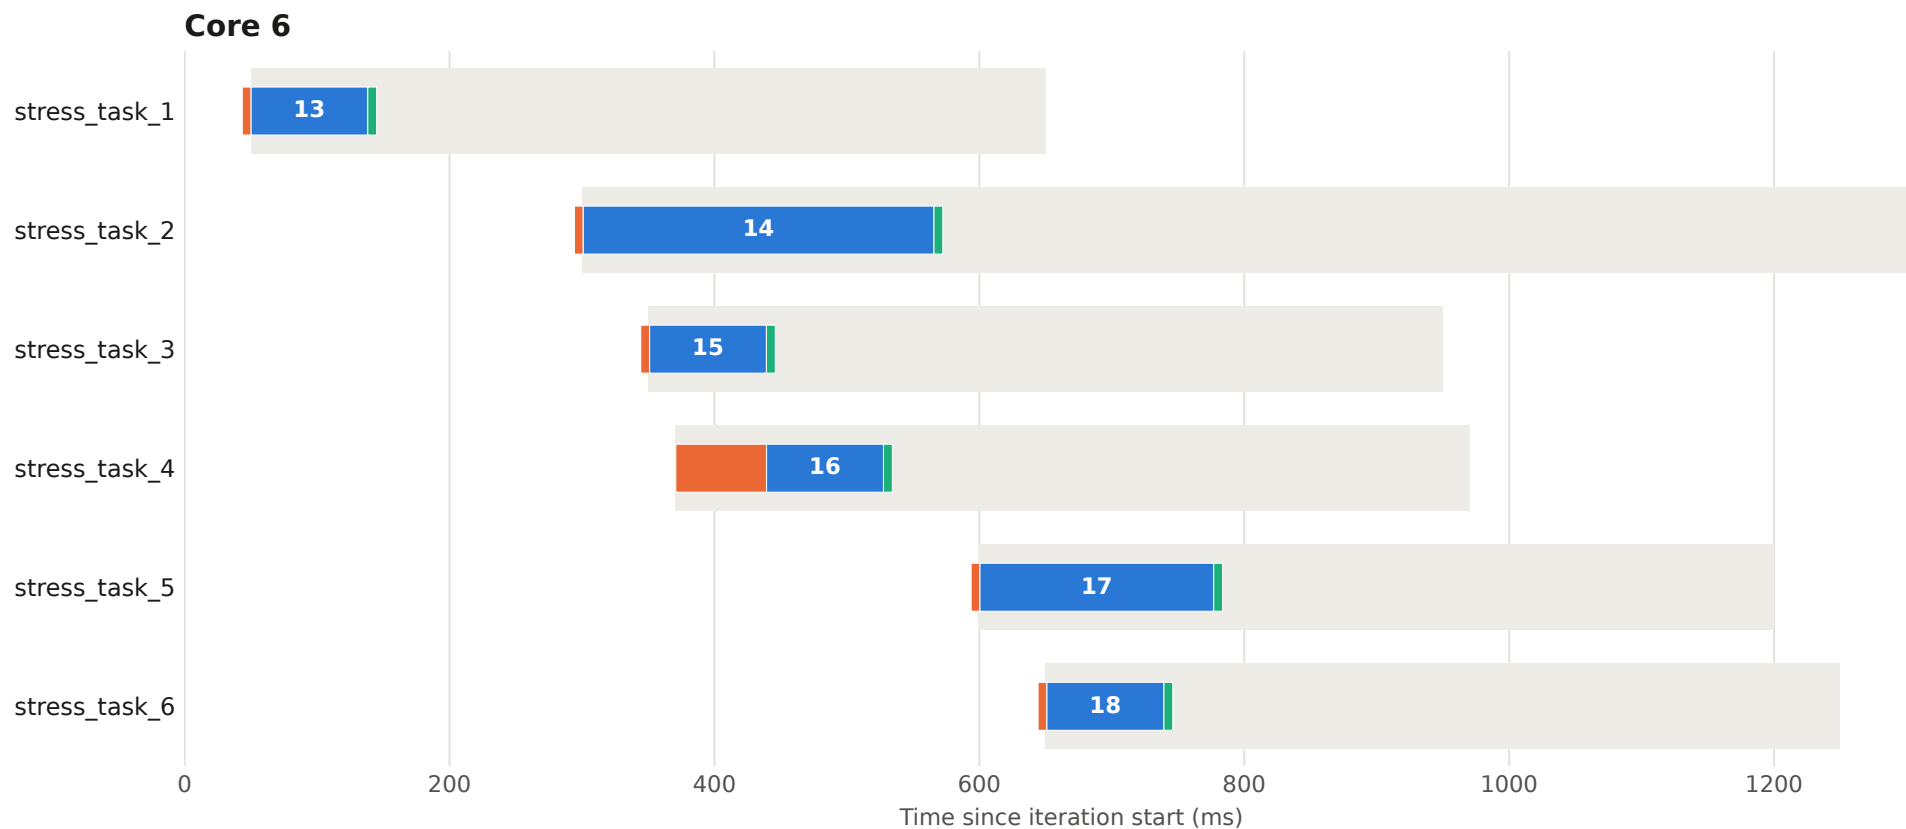


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 25 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

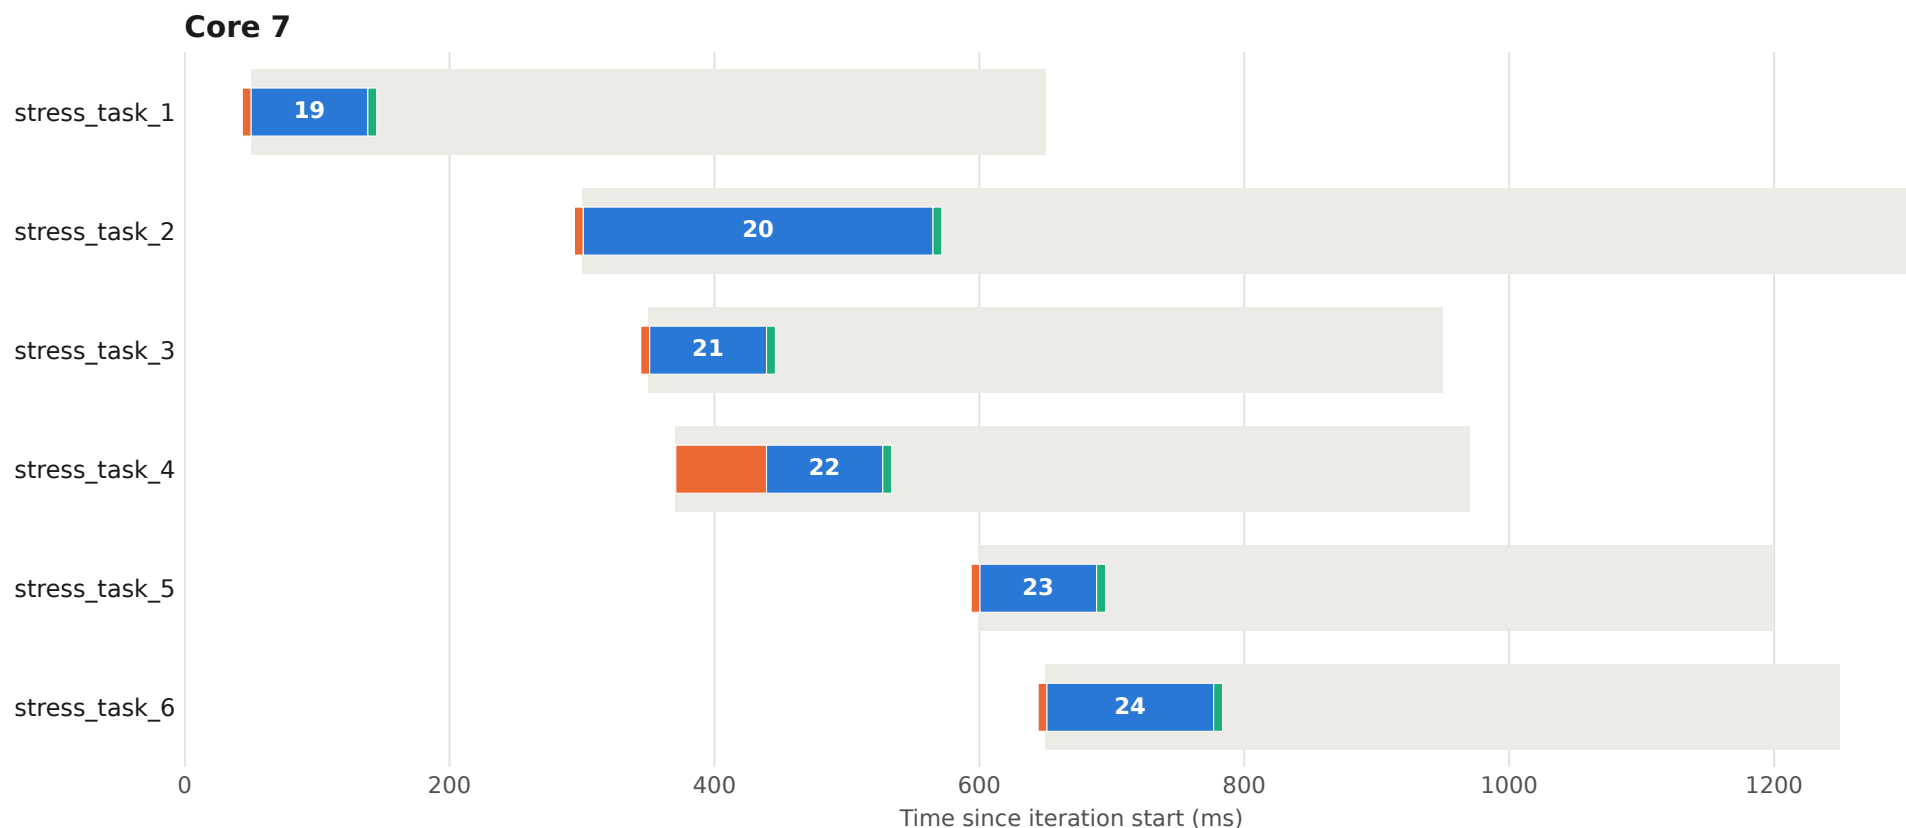


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 26 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

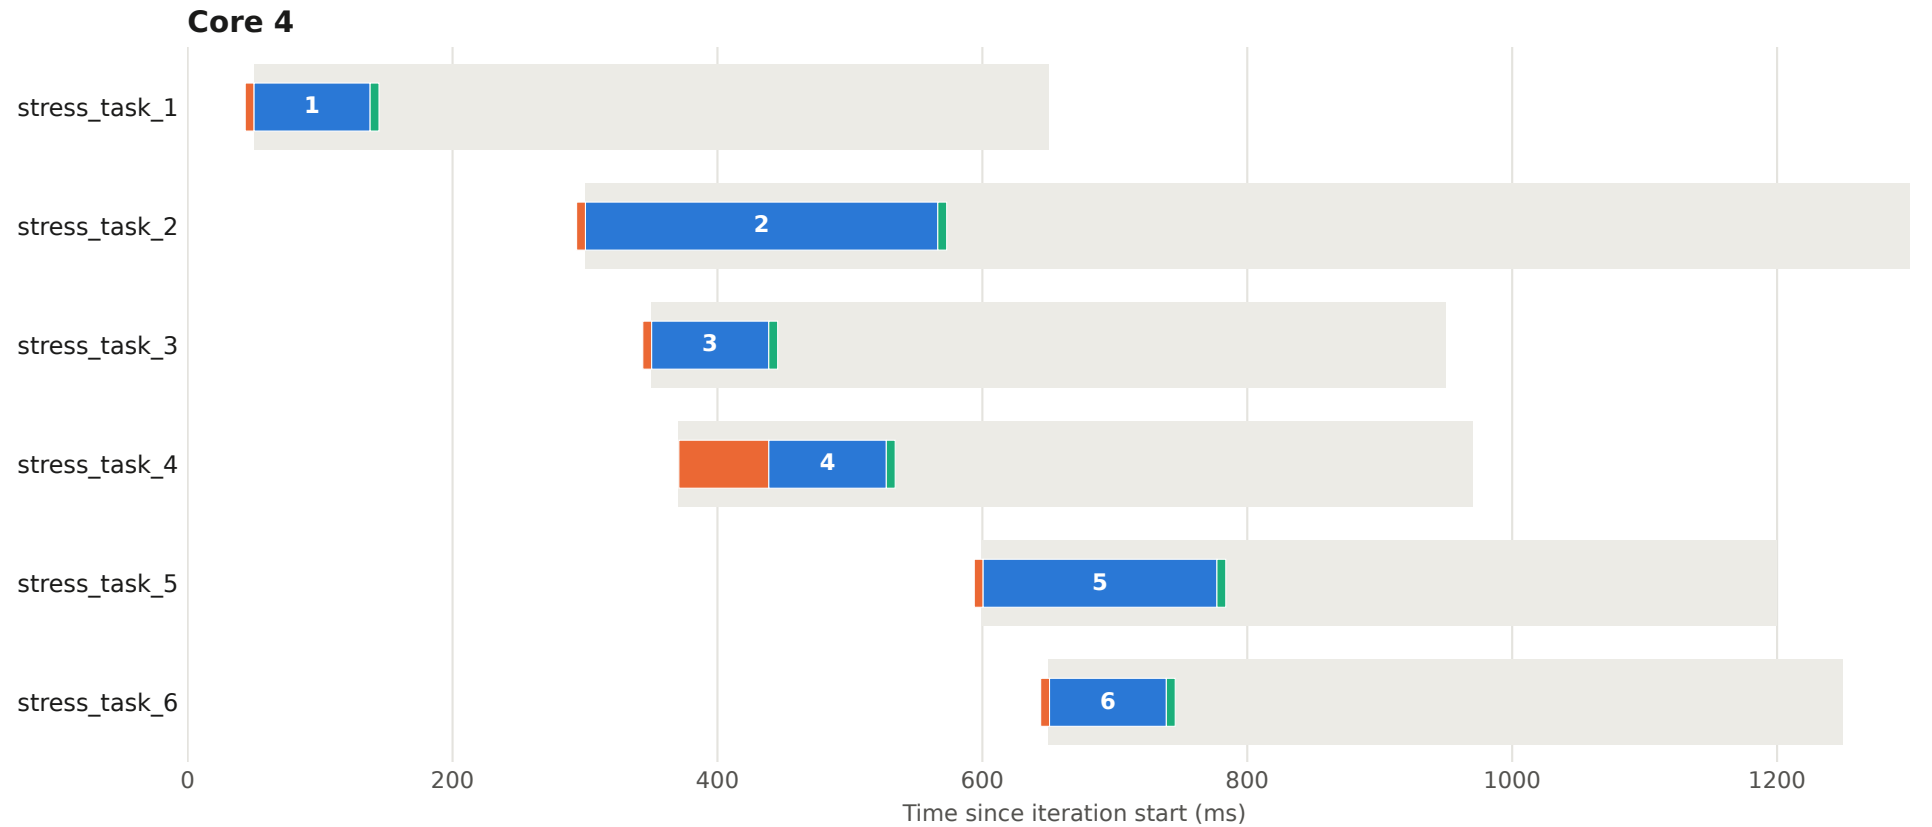


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 26 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

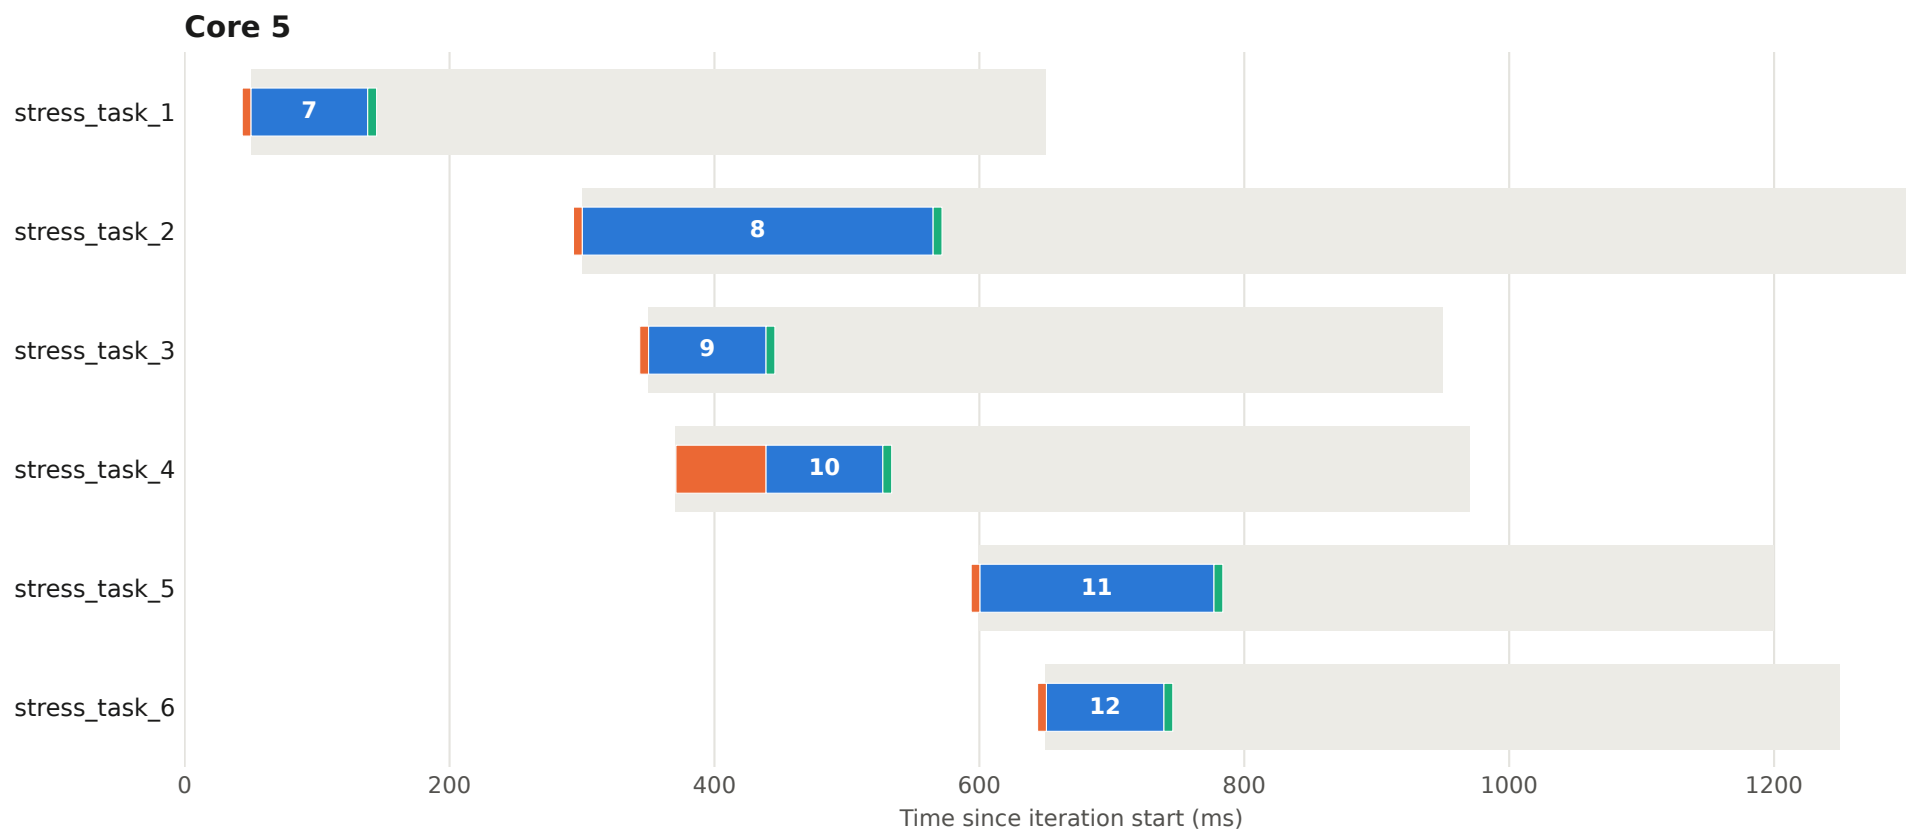


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 26 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

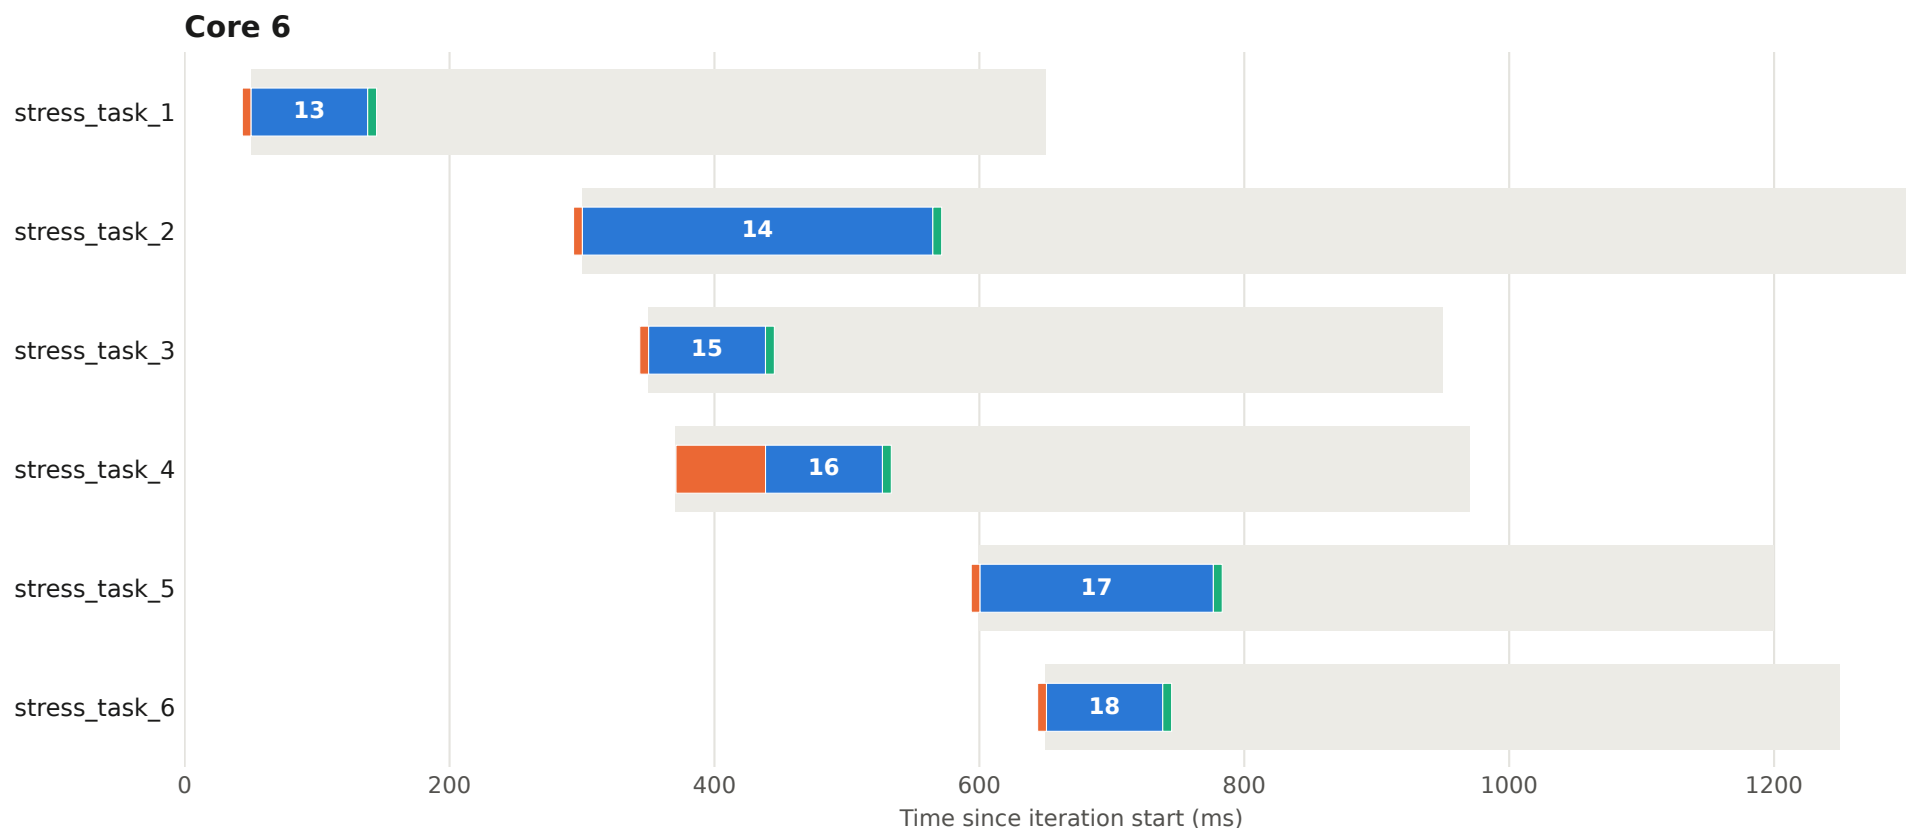


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 26 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

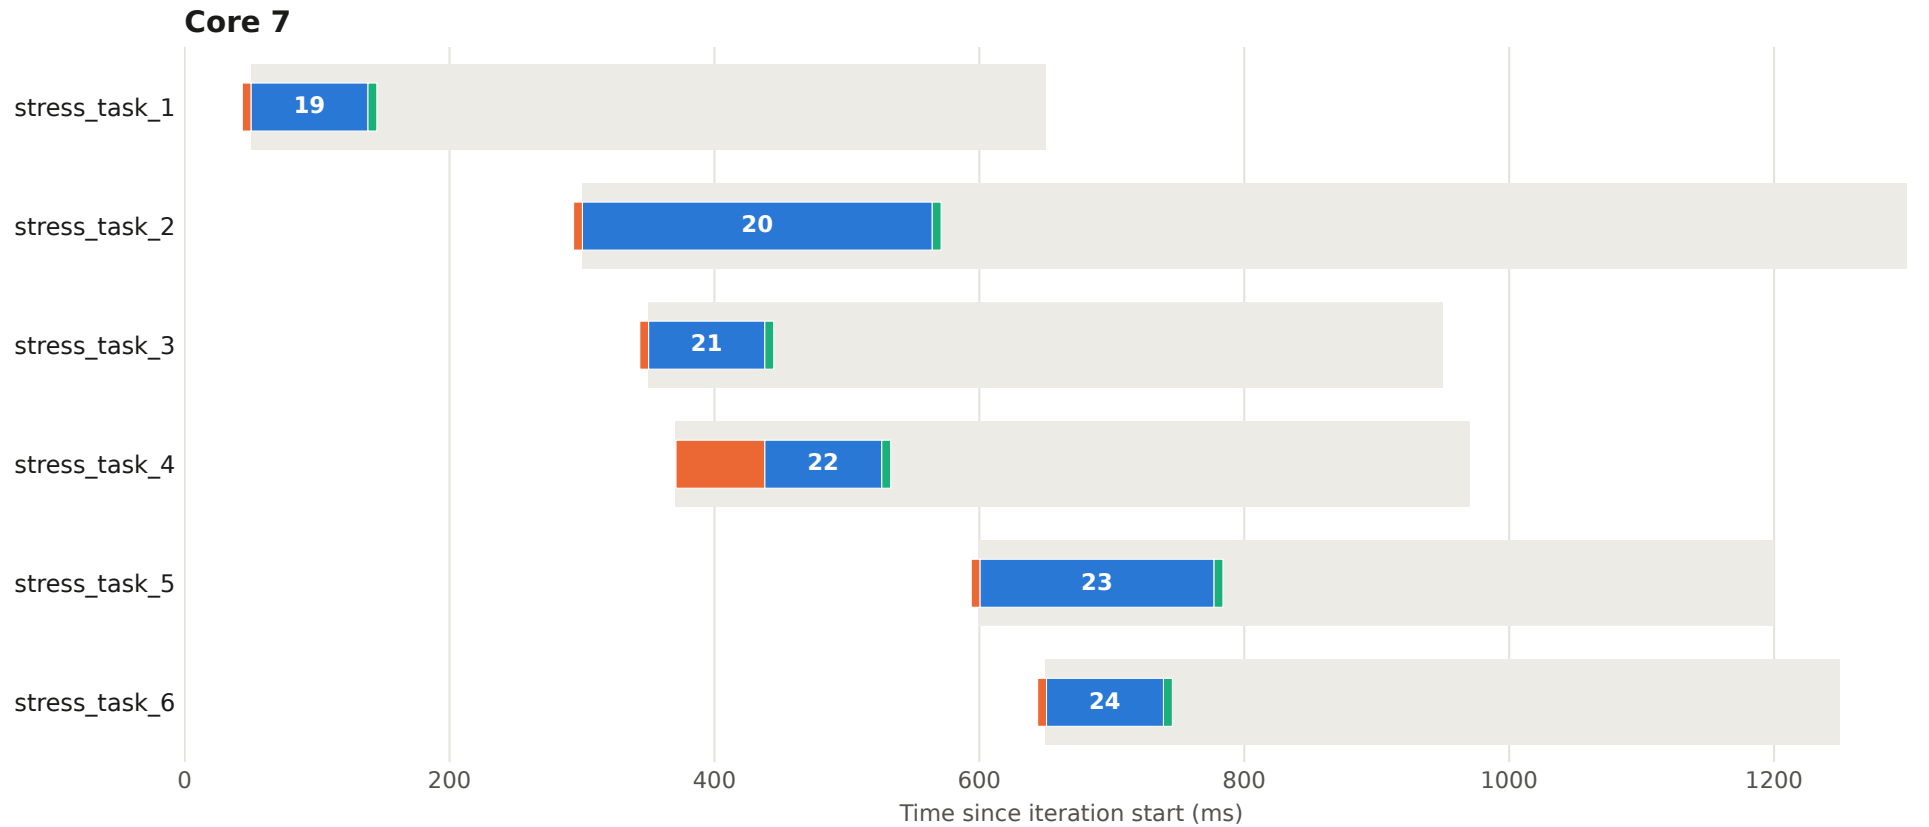


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 27 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

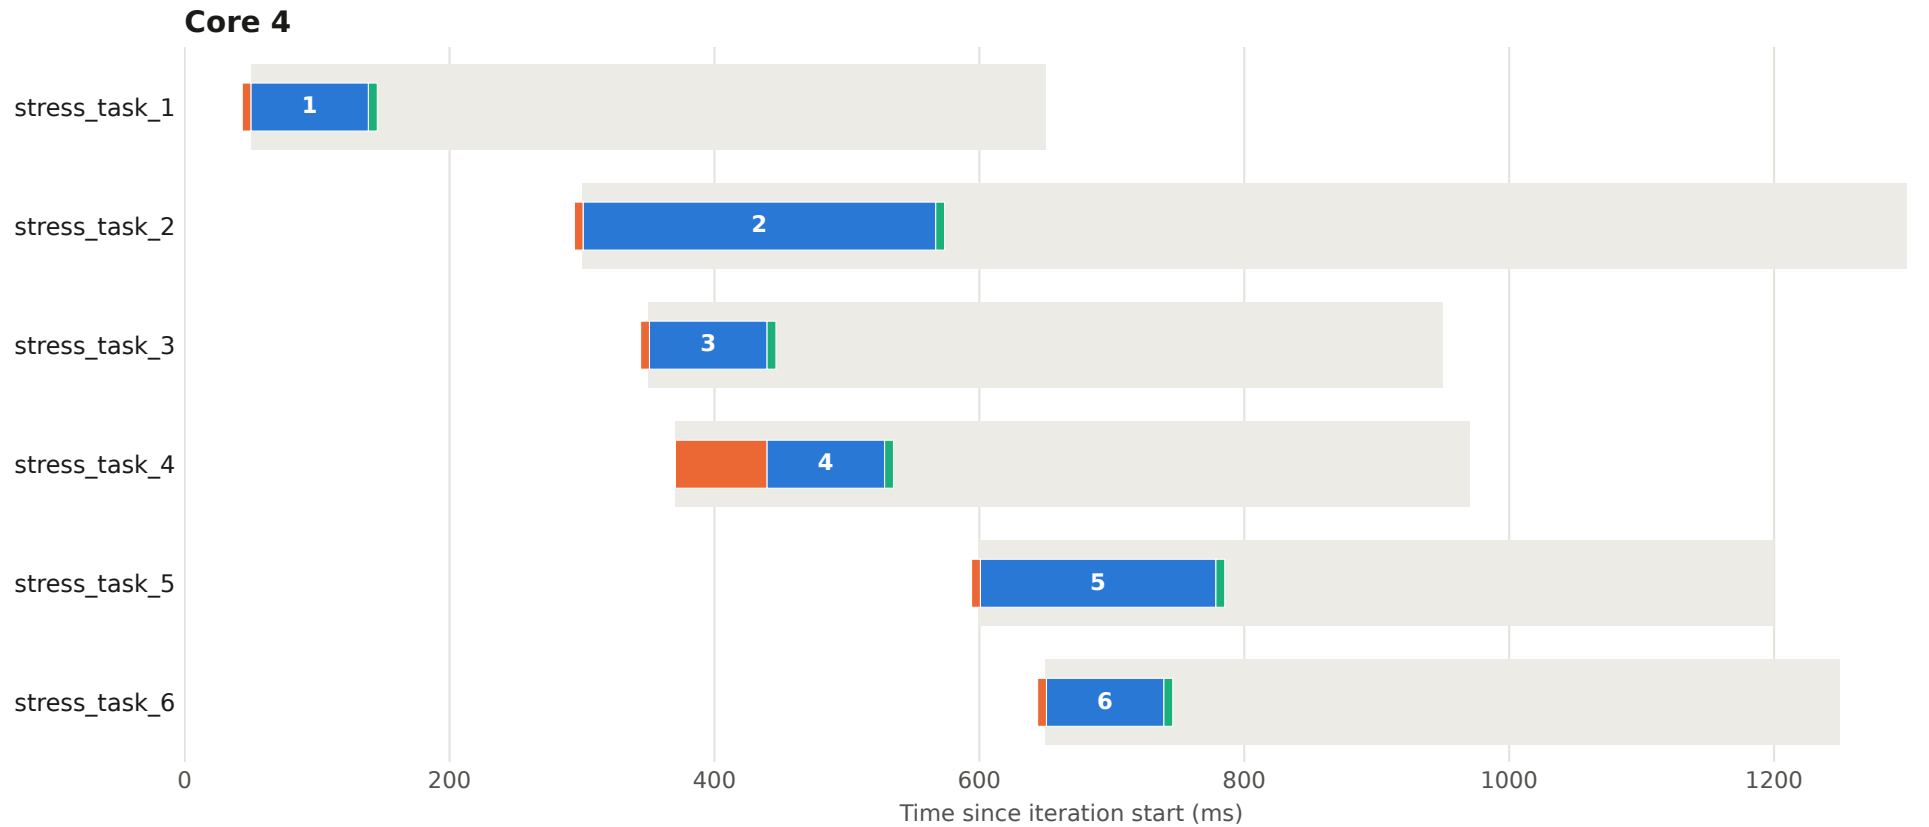


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 27 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

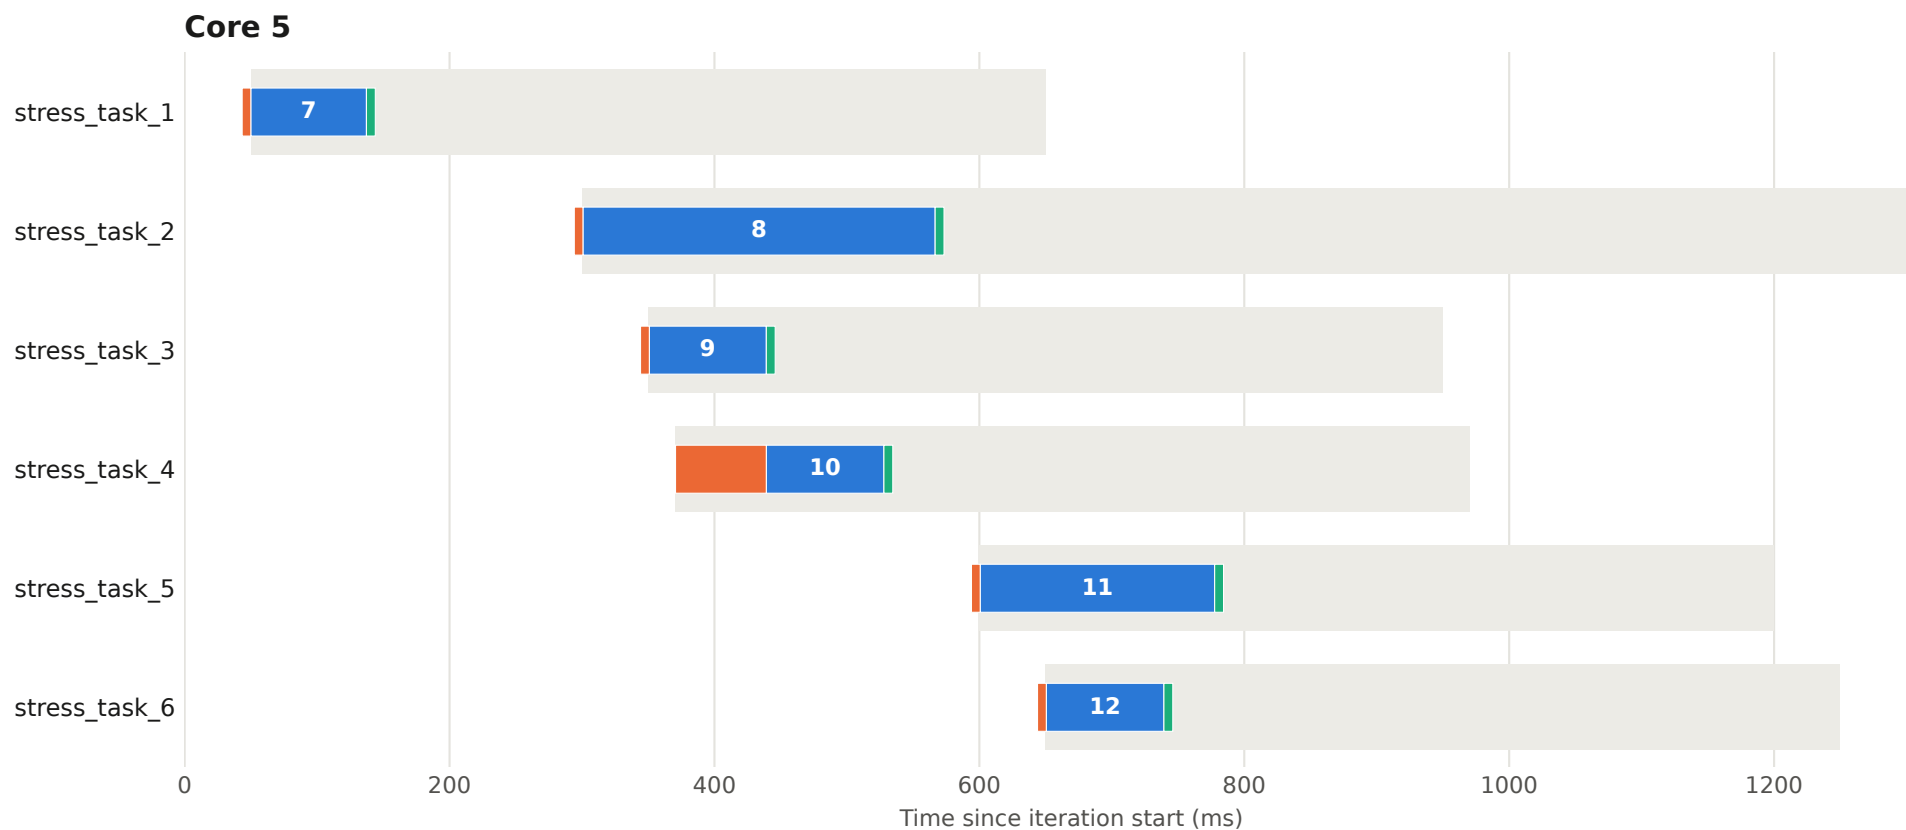


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 27 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

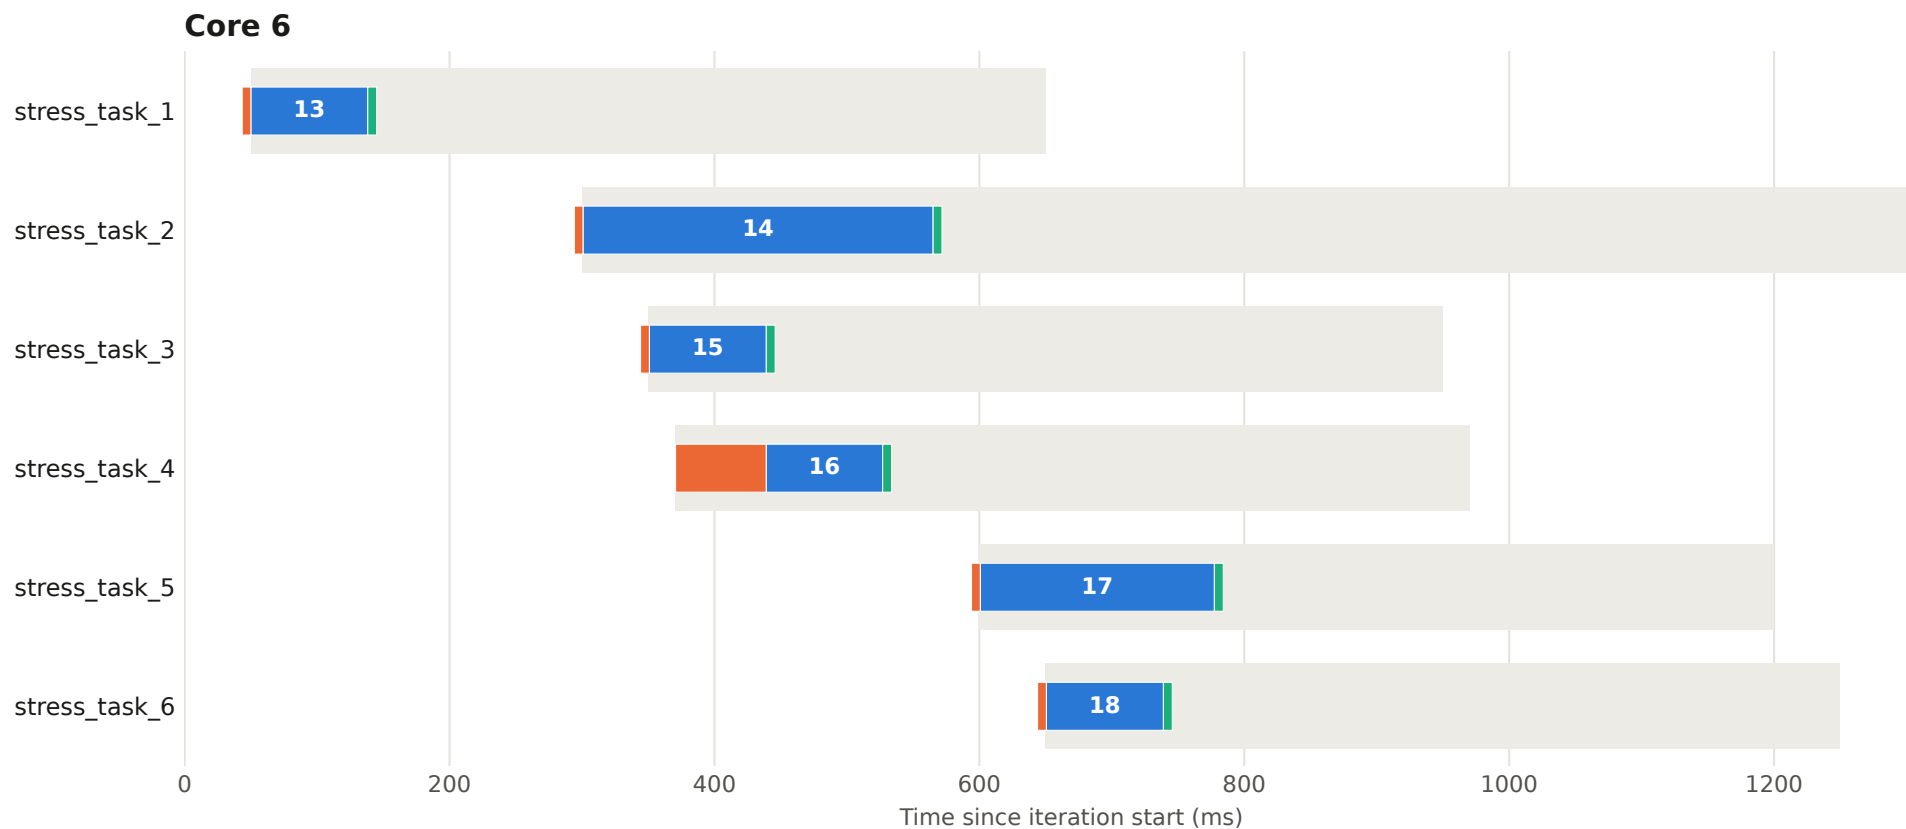


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 27 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

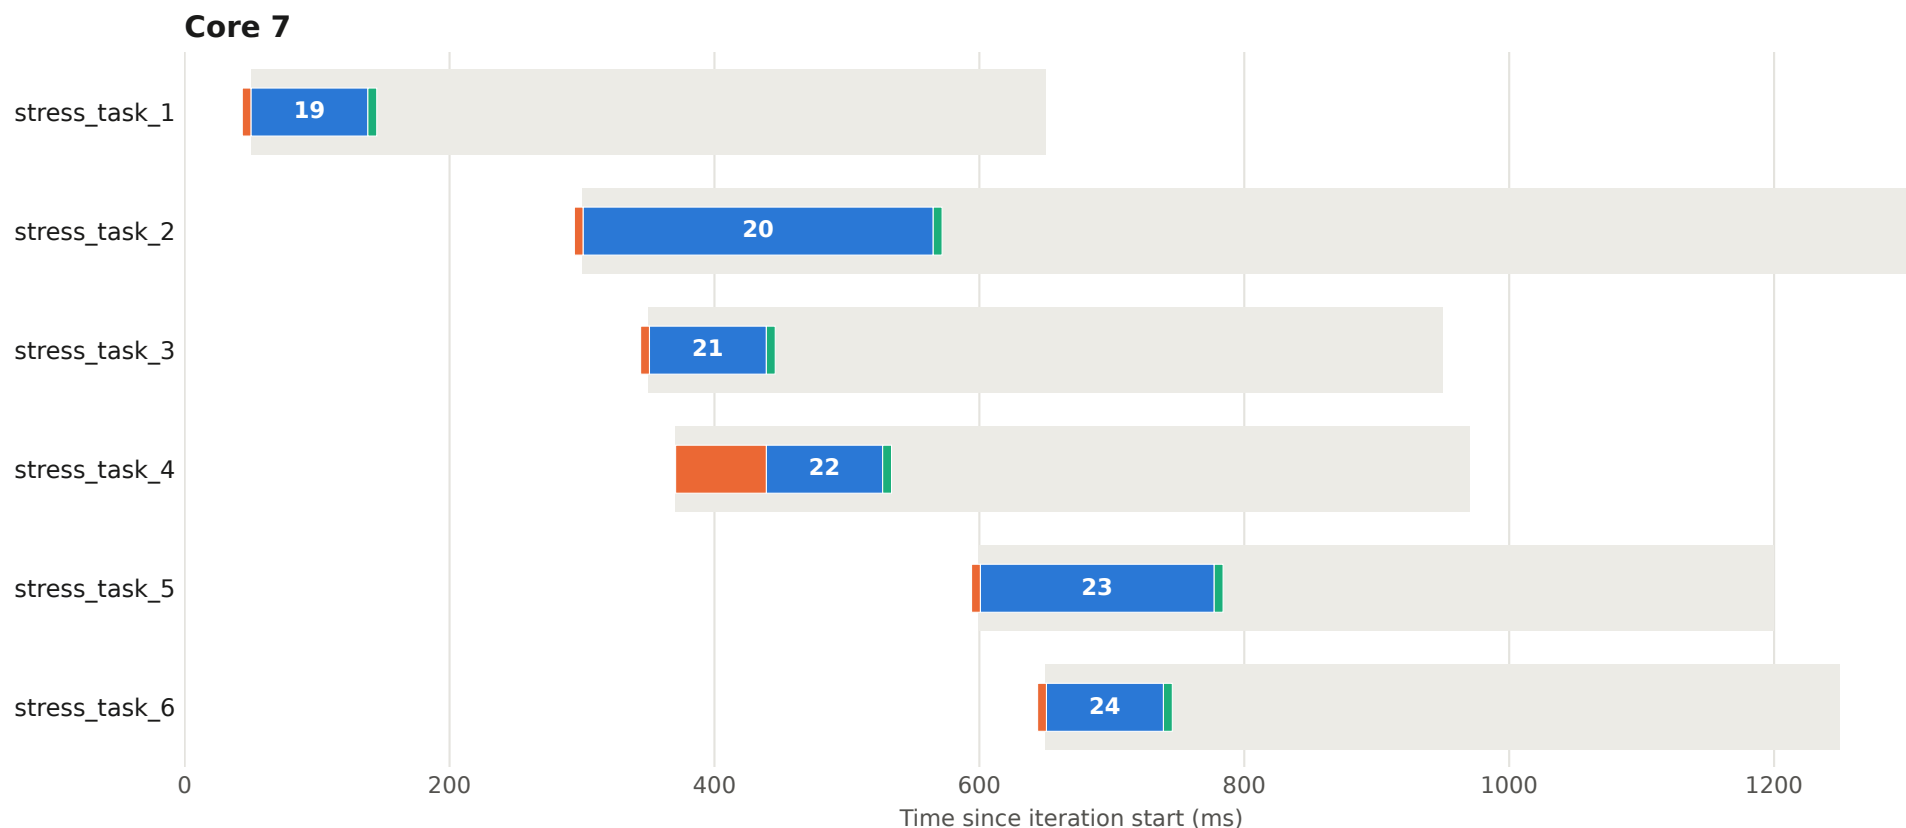


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 28 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

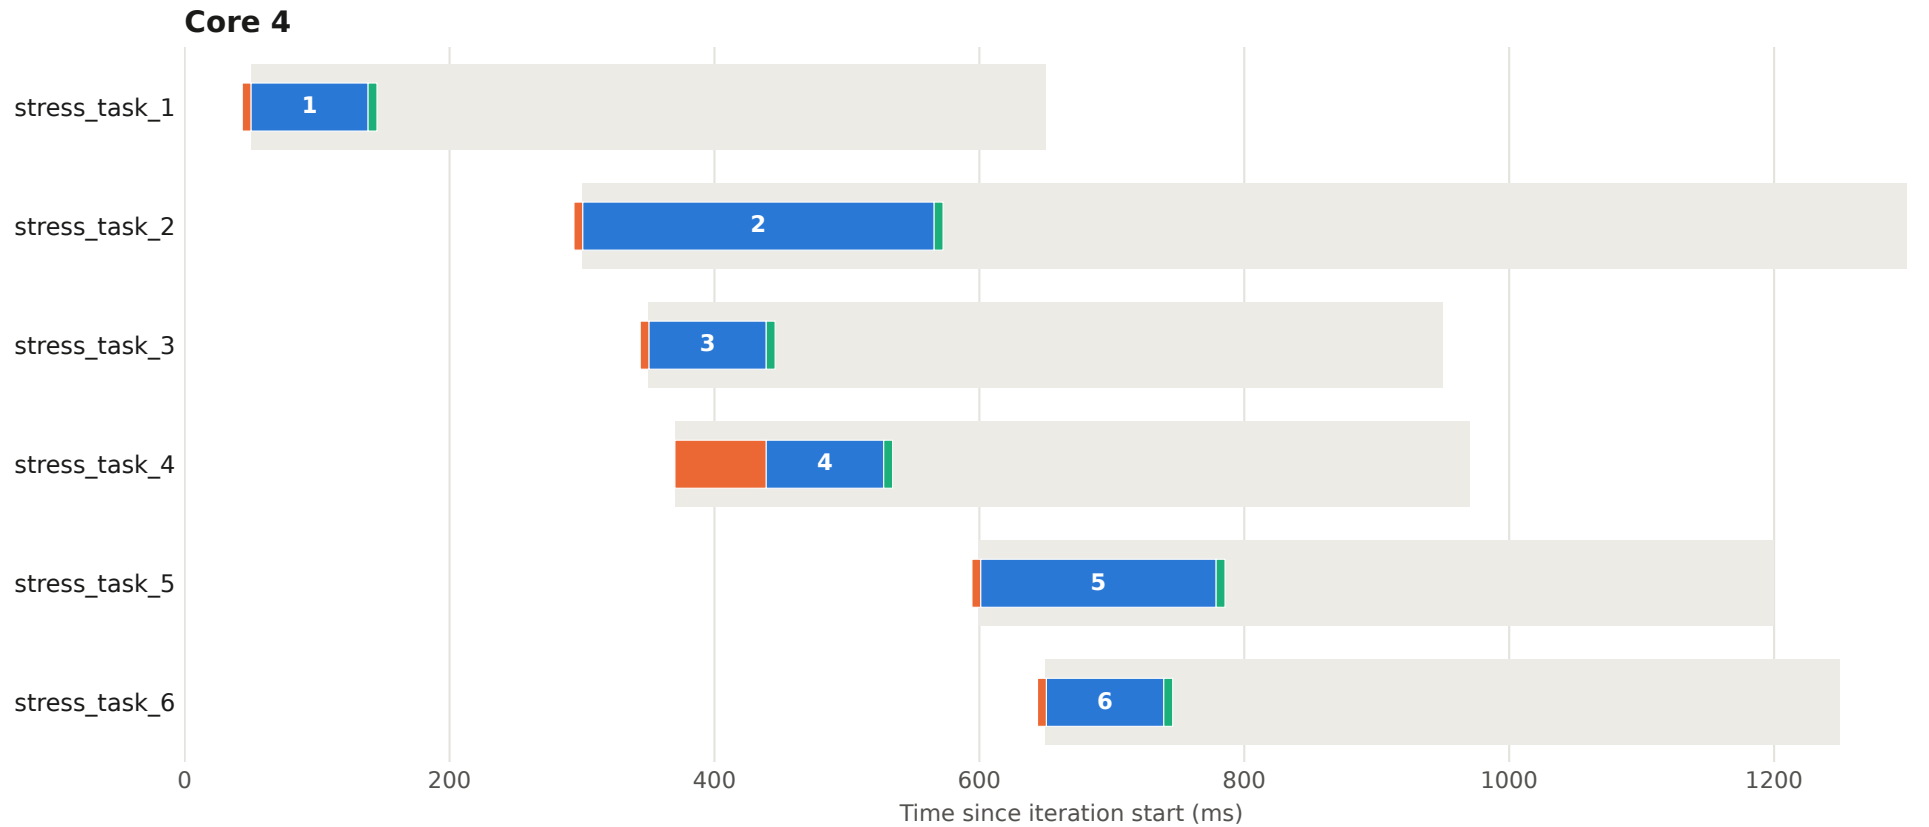


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 28 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

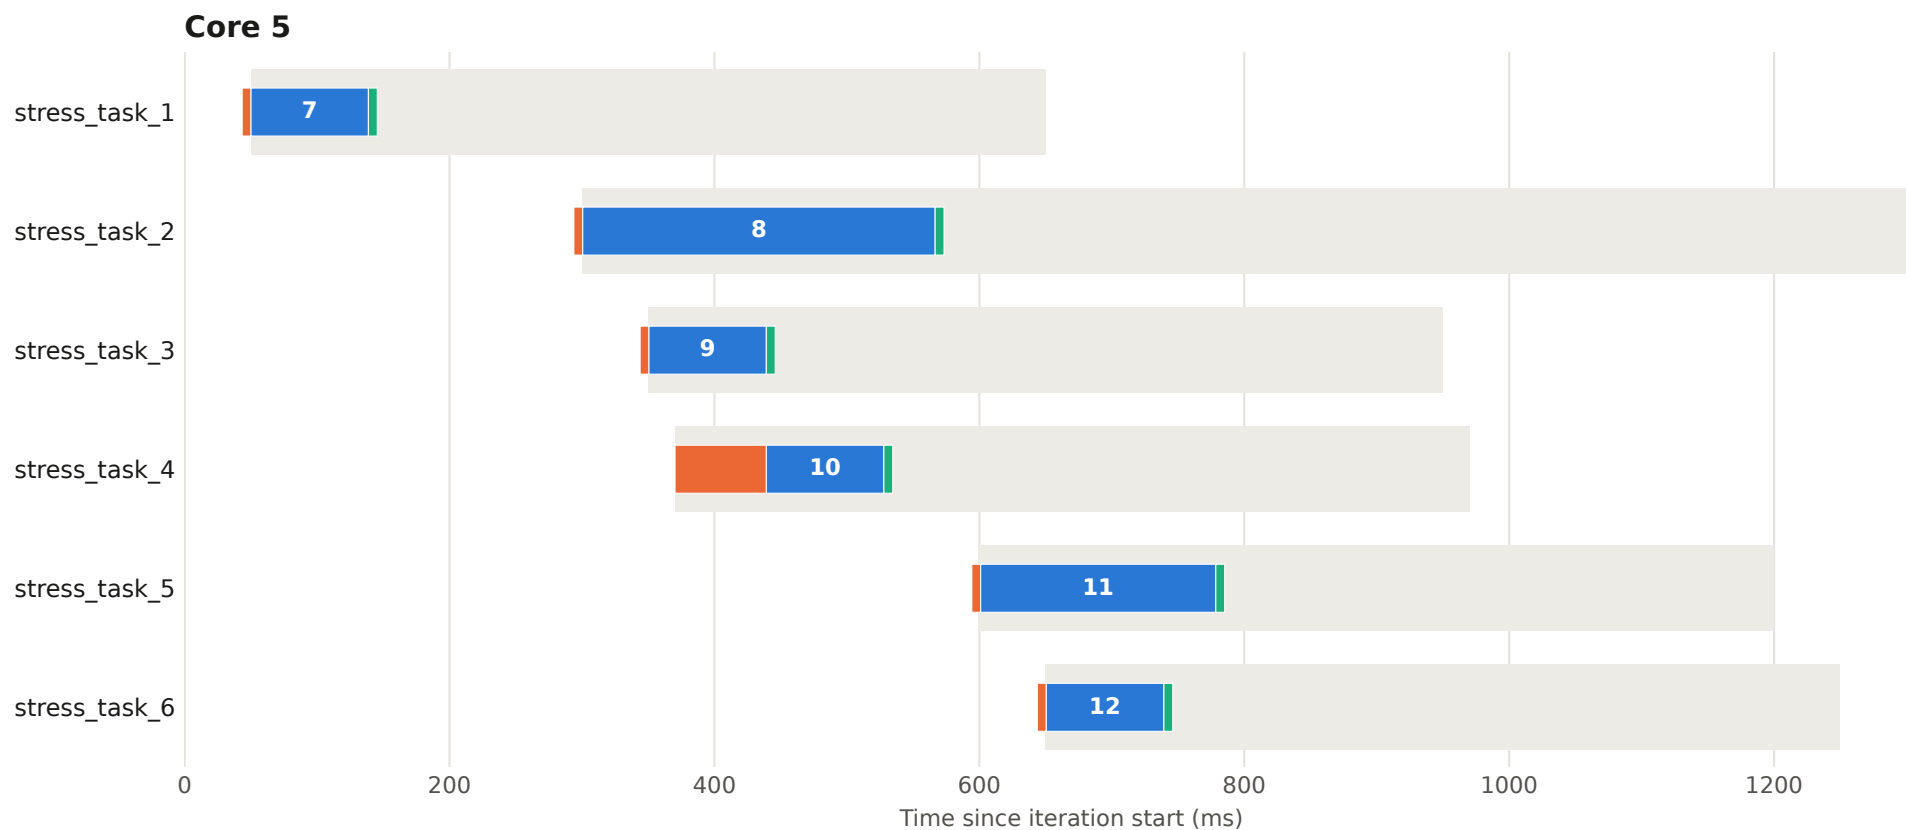


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 28 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

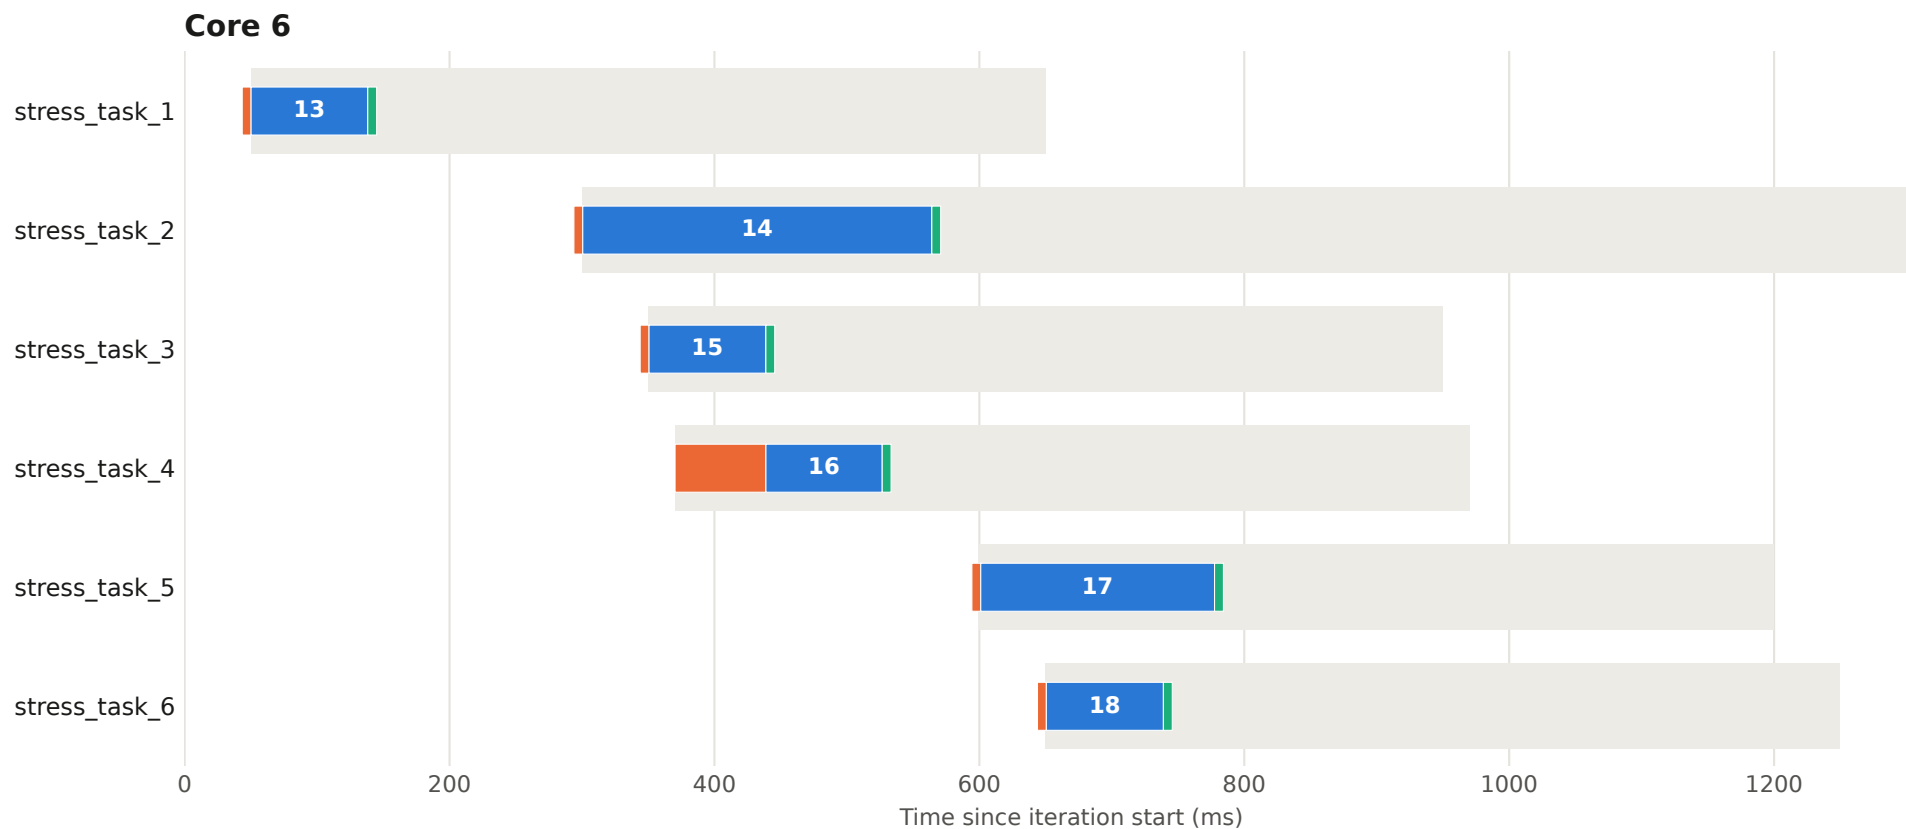


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 28 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

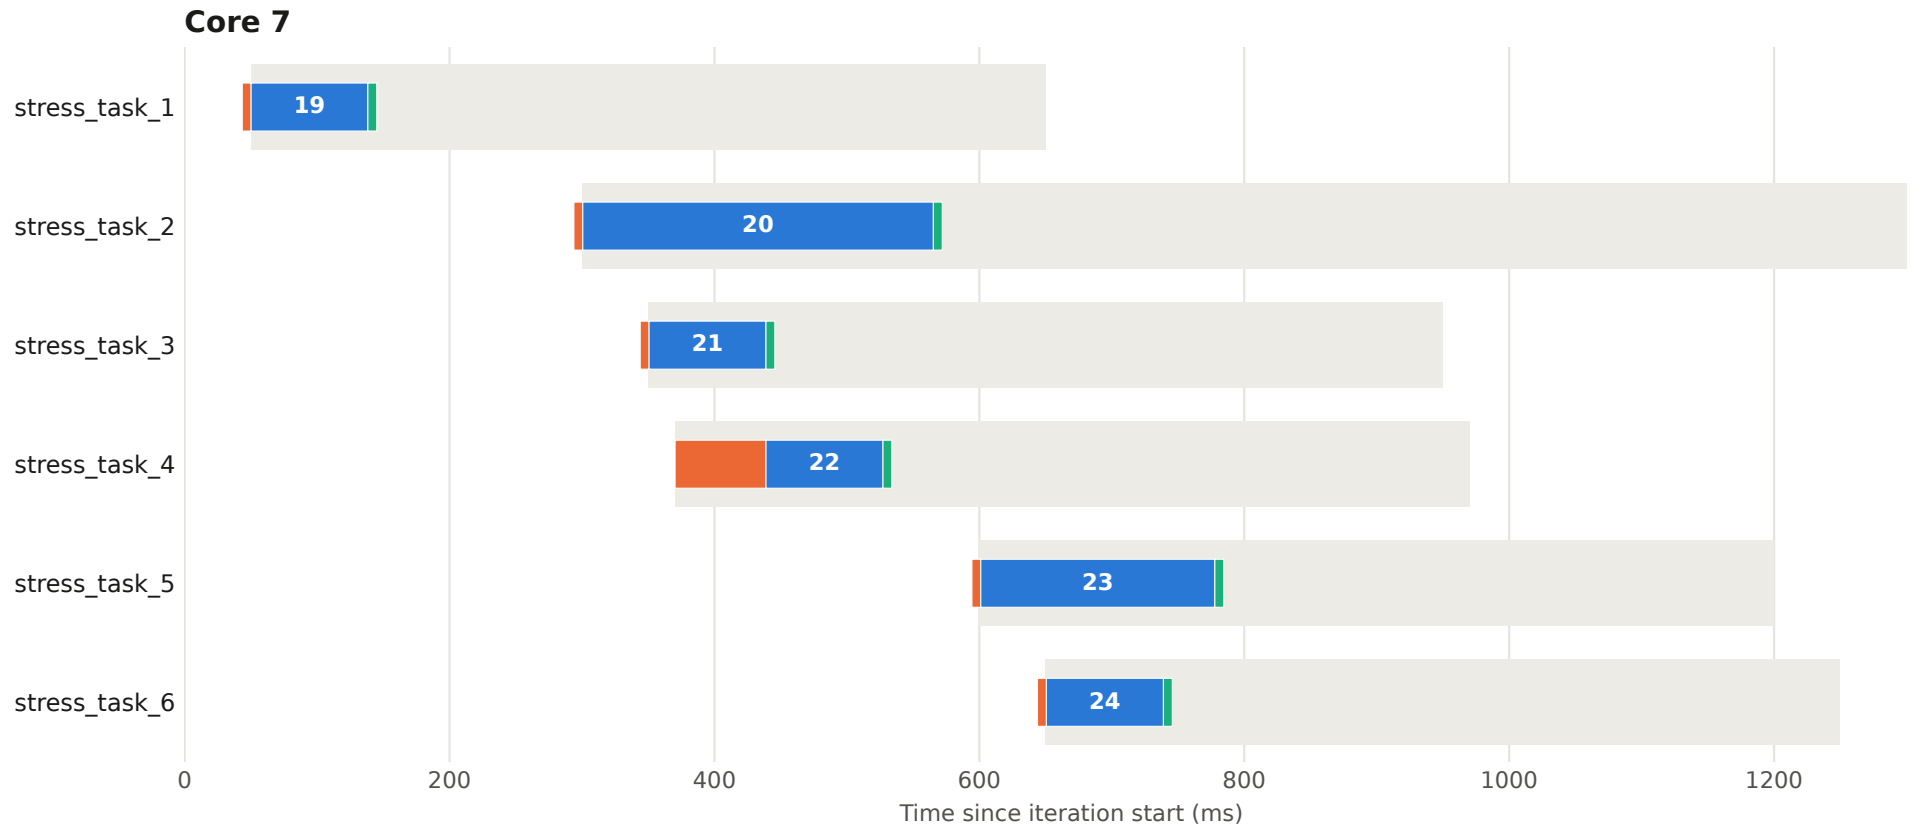


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 29 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

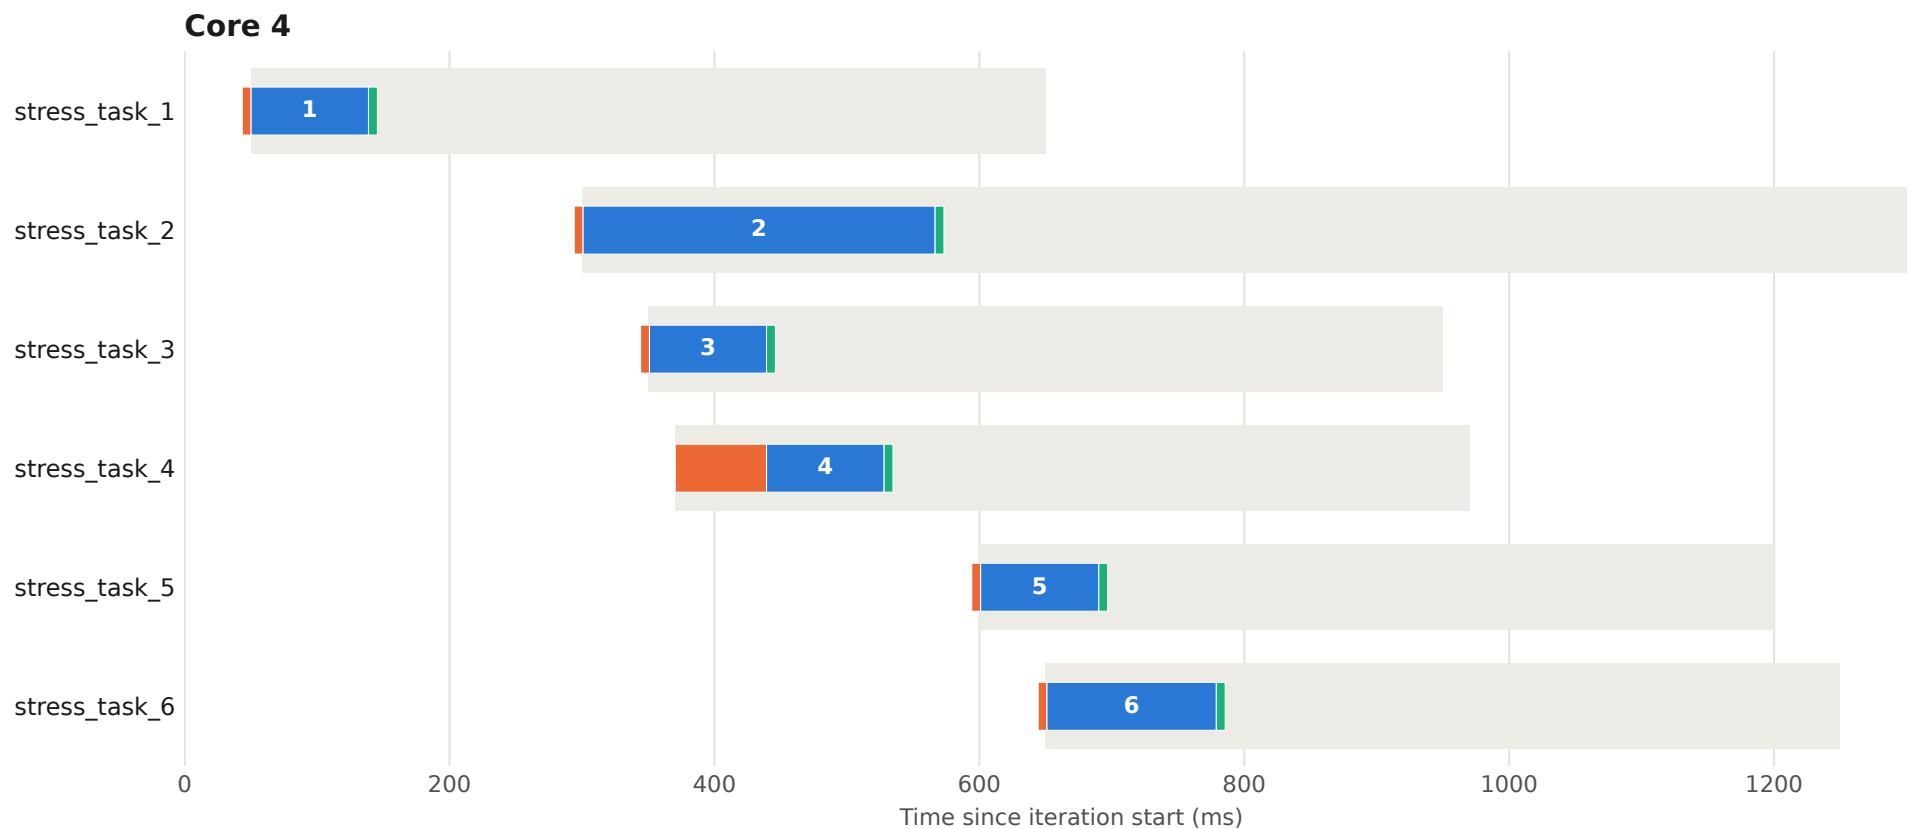


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 29 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

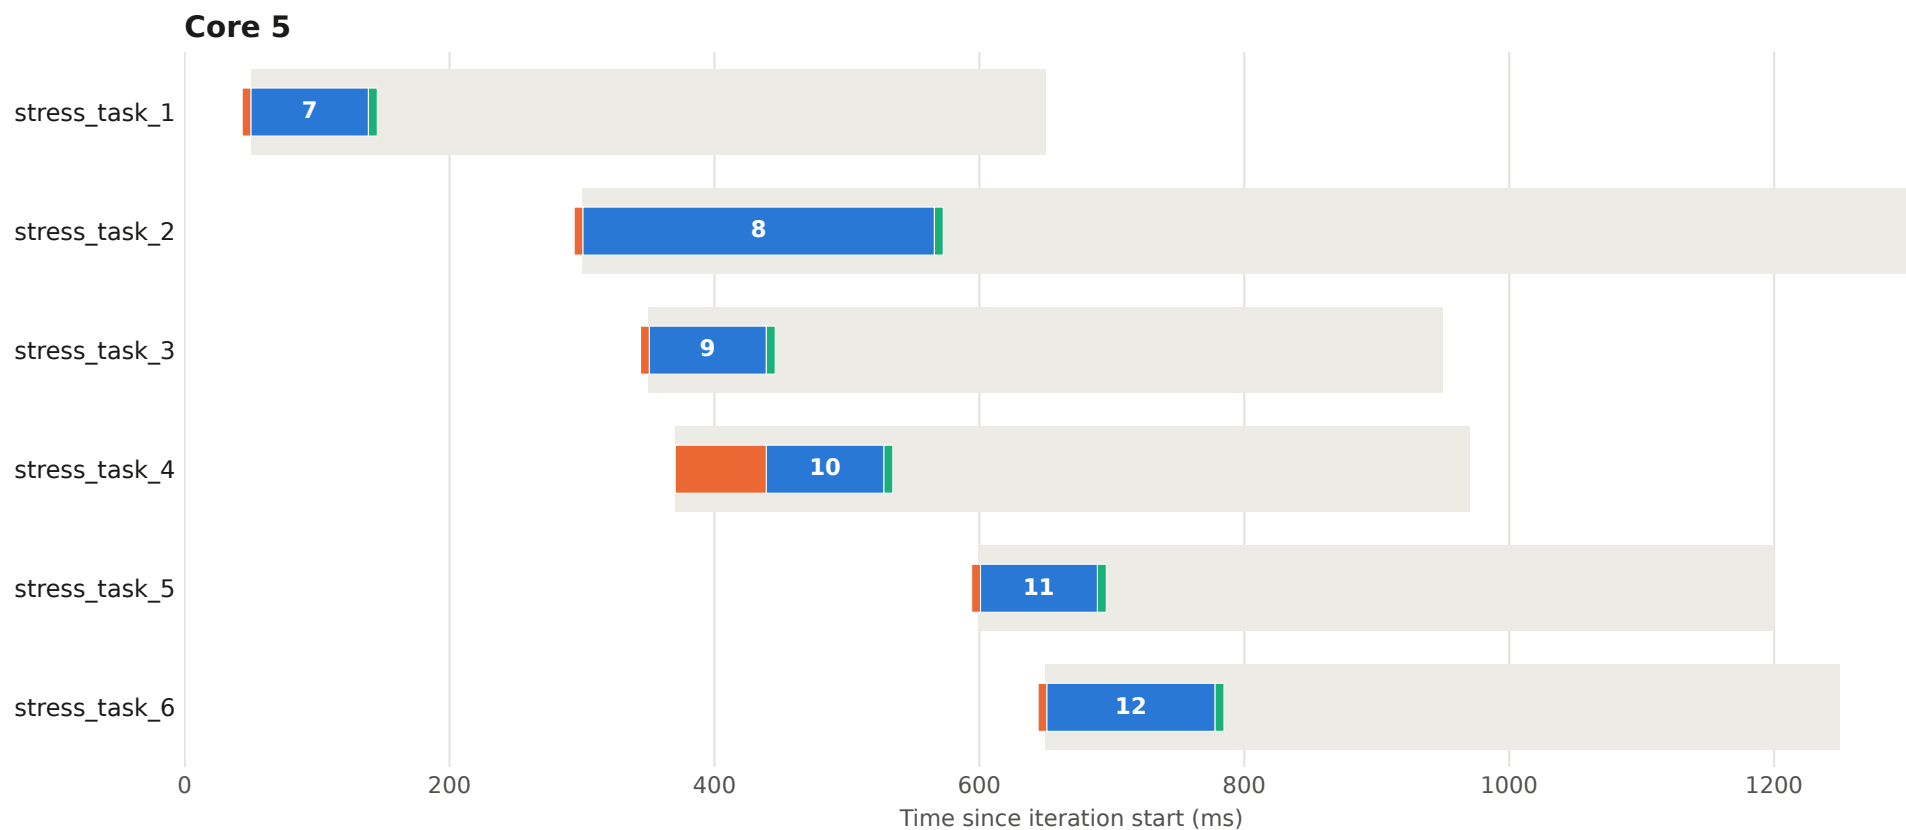


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 29 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

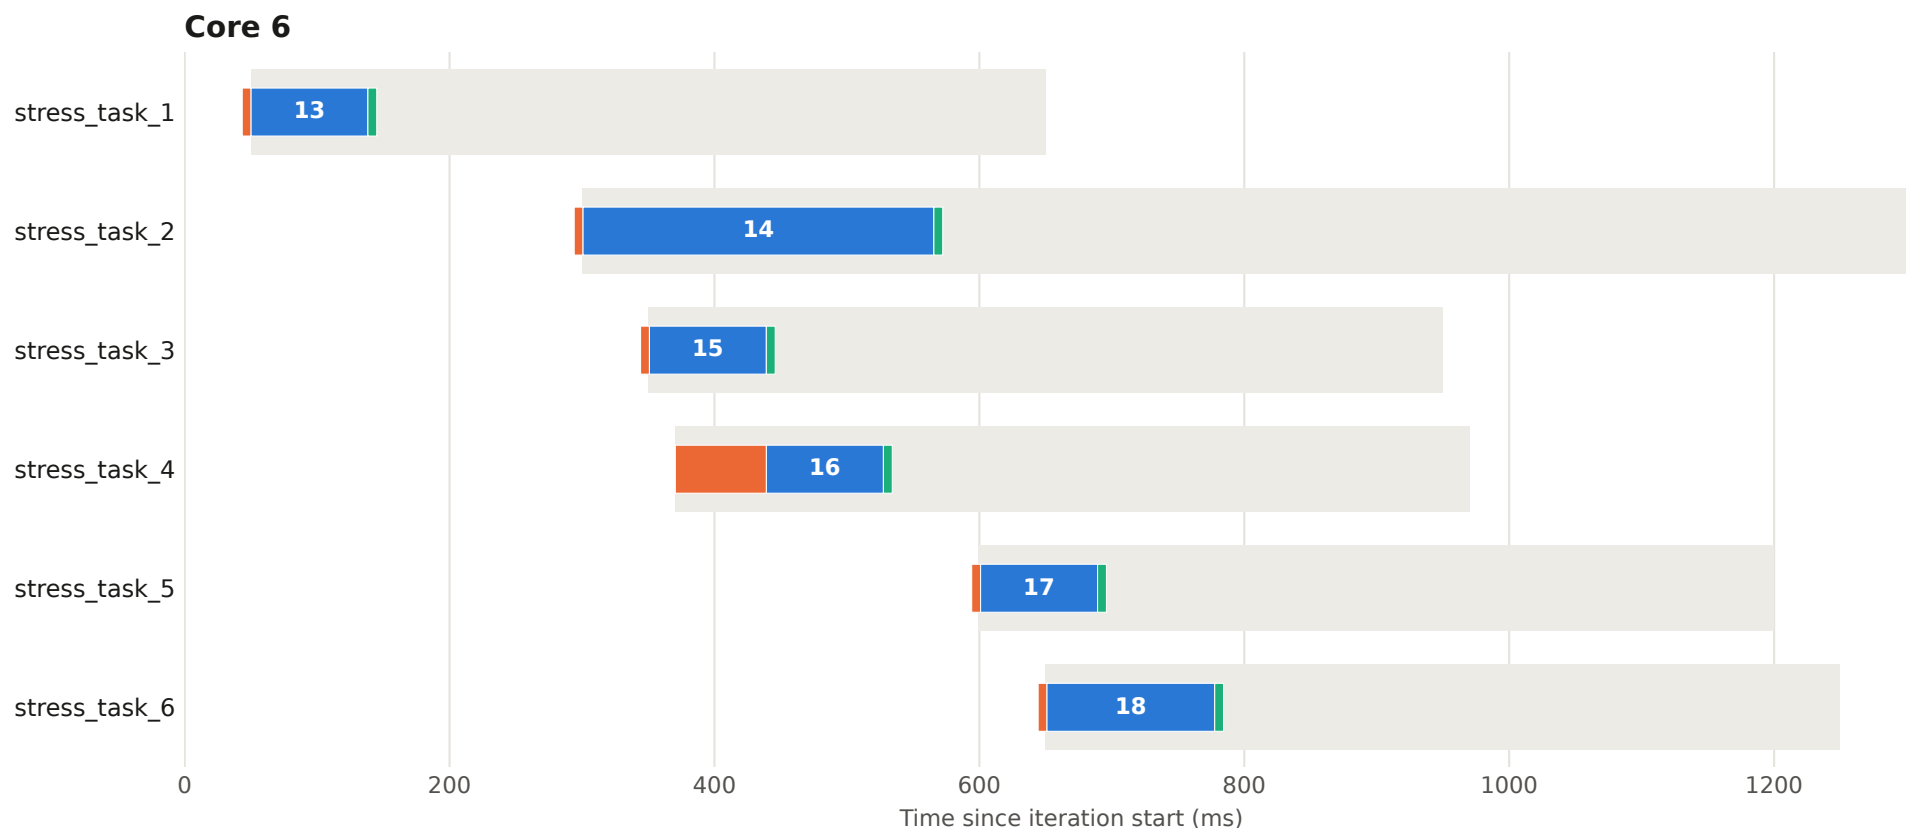


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 29 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

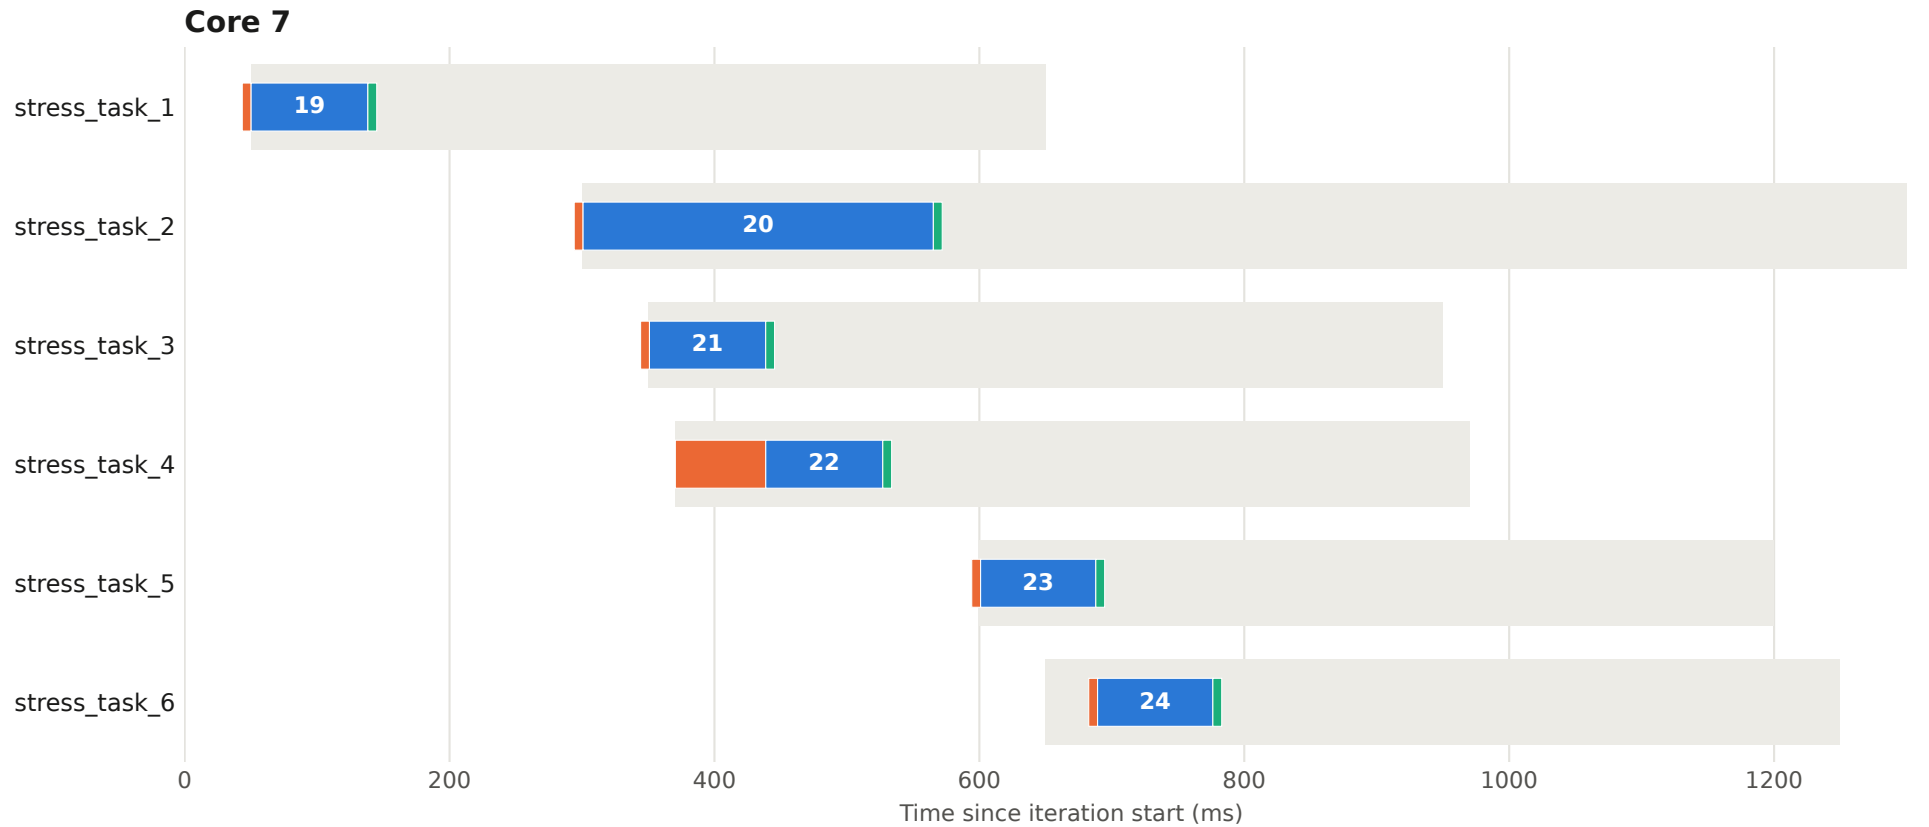


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 30 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

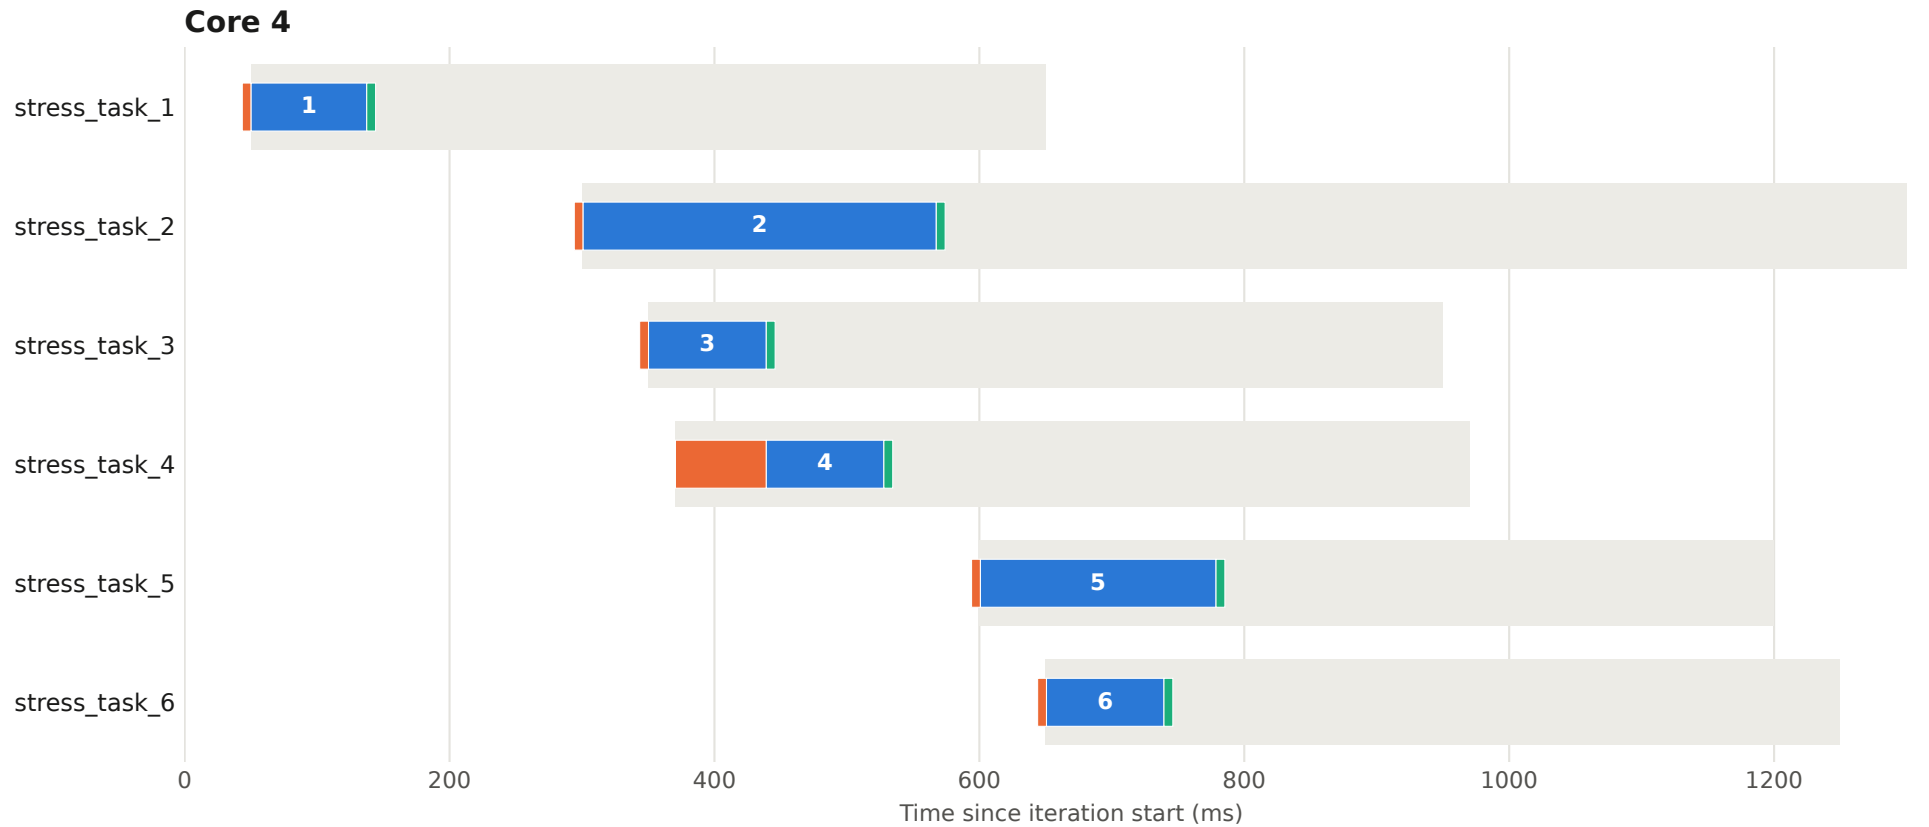


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 30 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

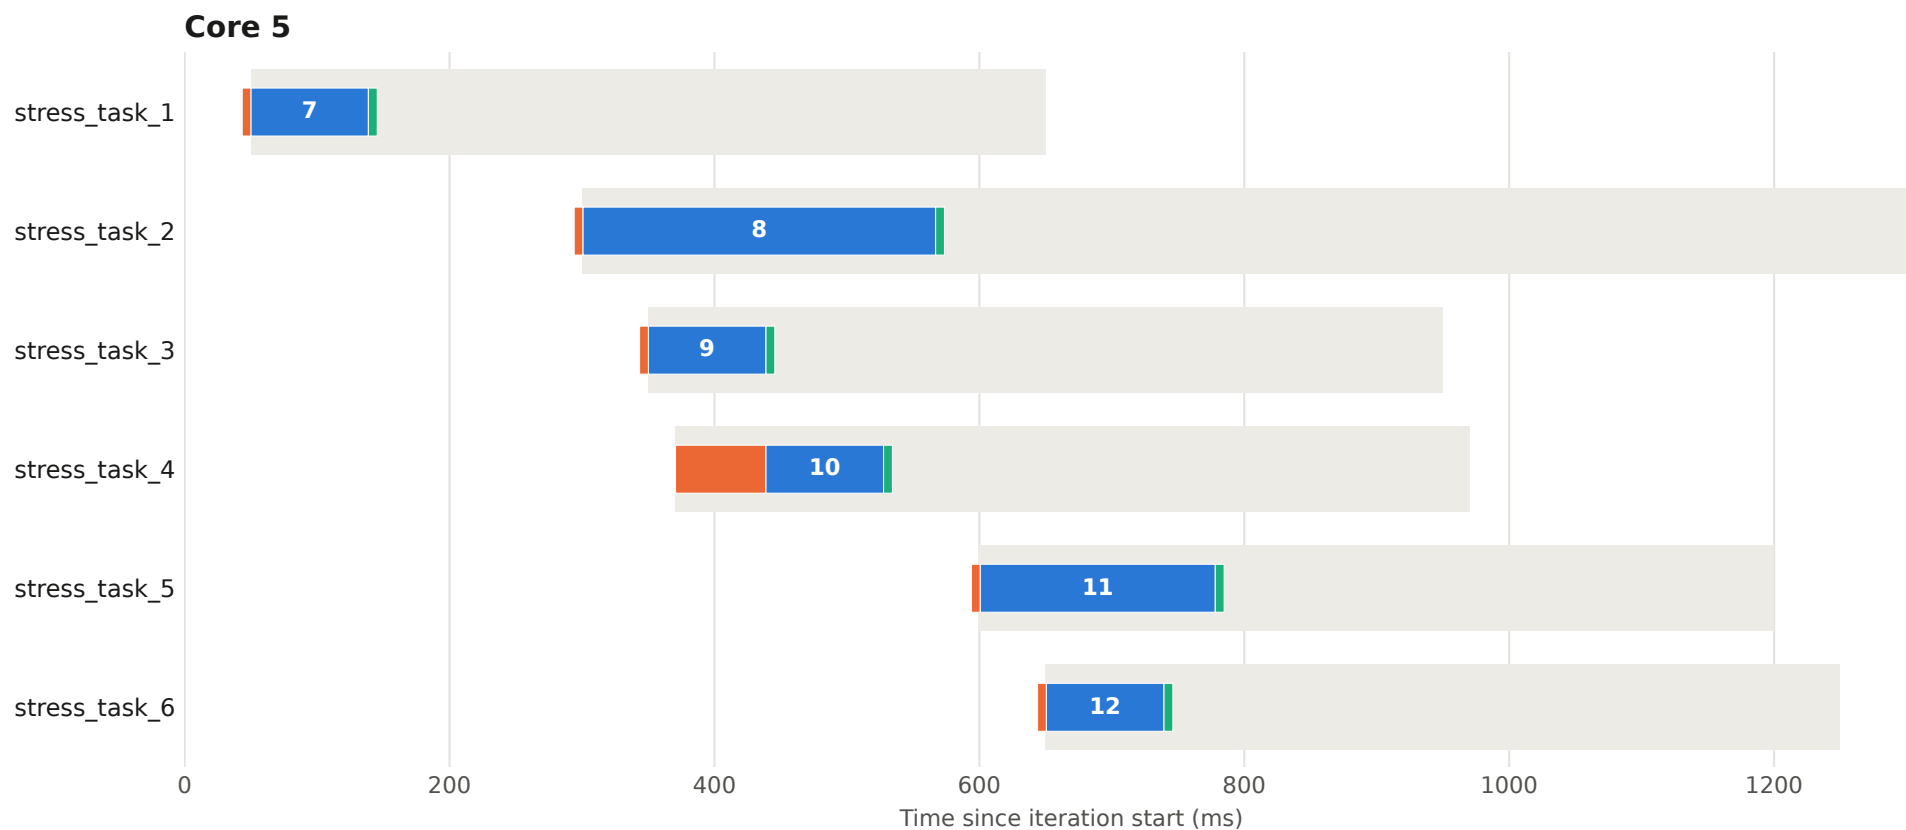


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 30 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

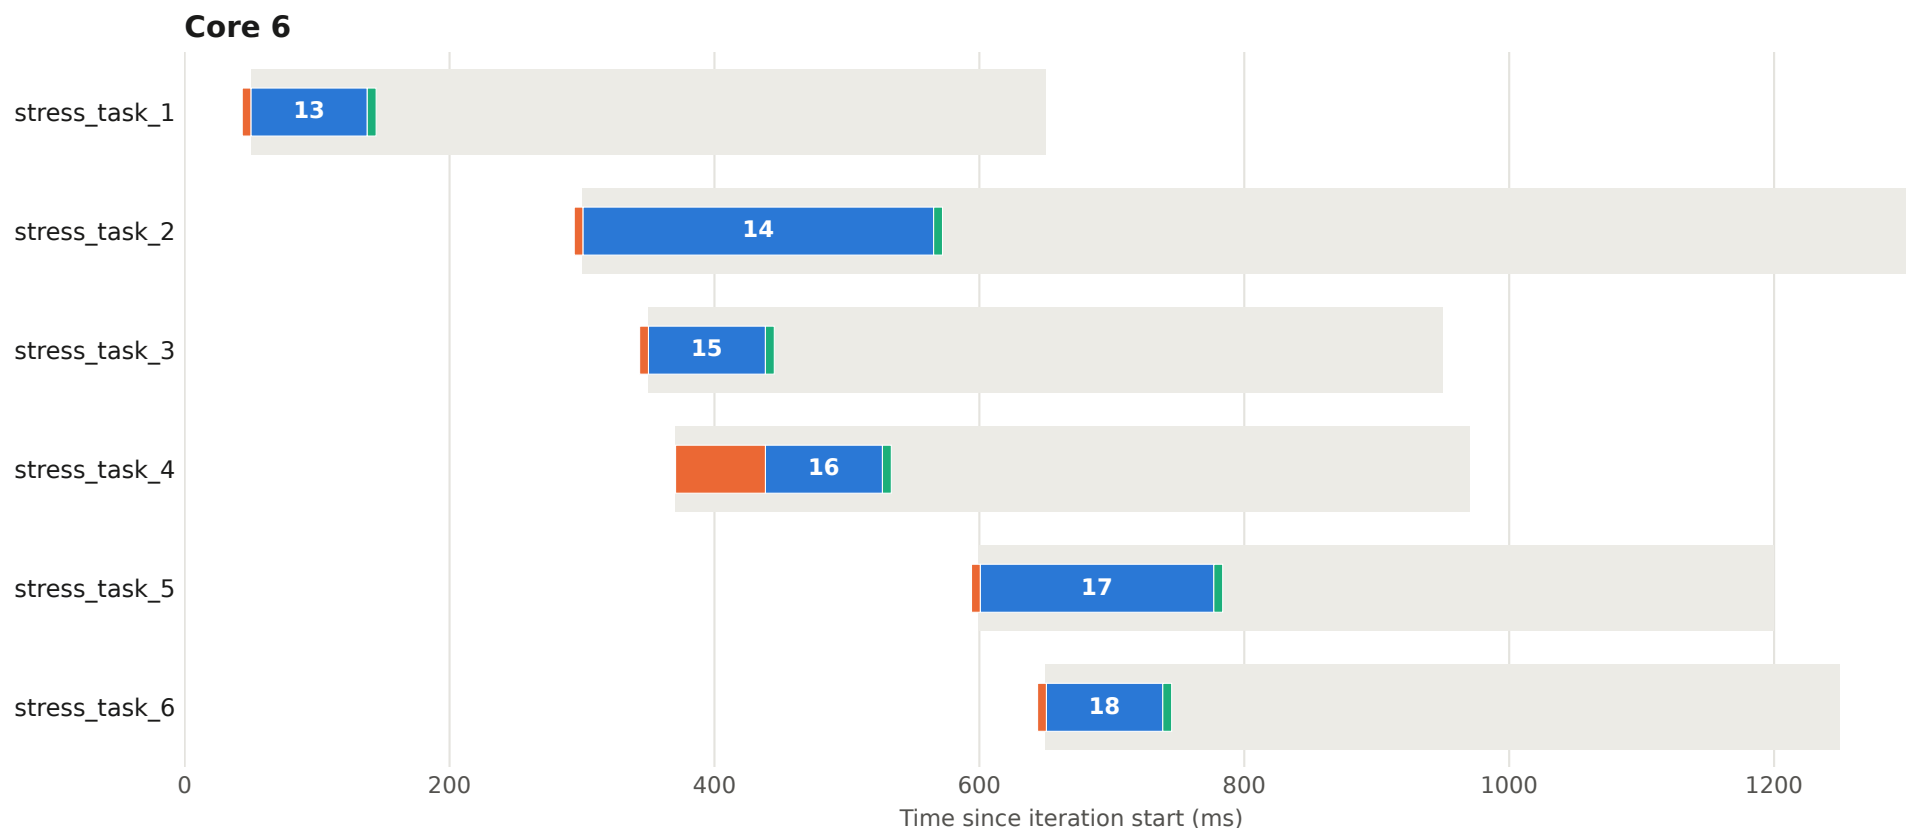


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 30 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

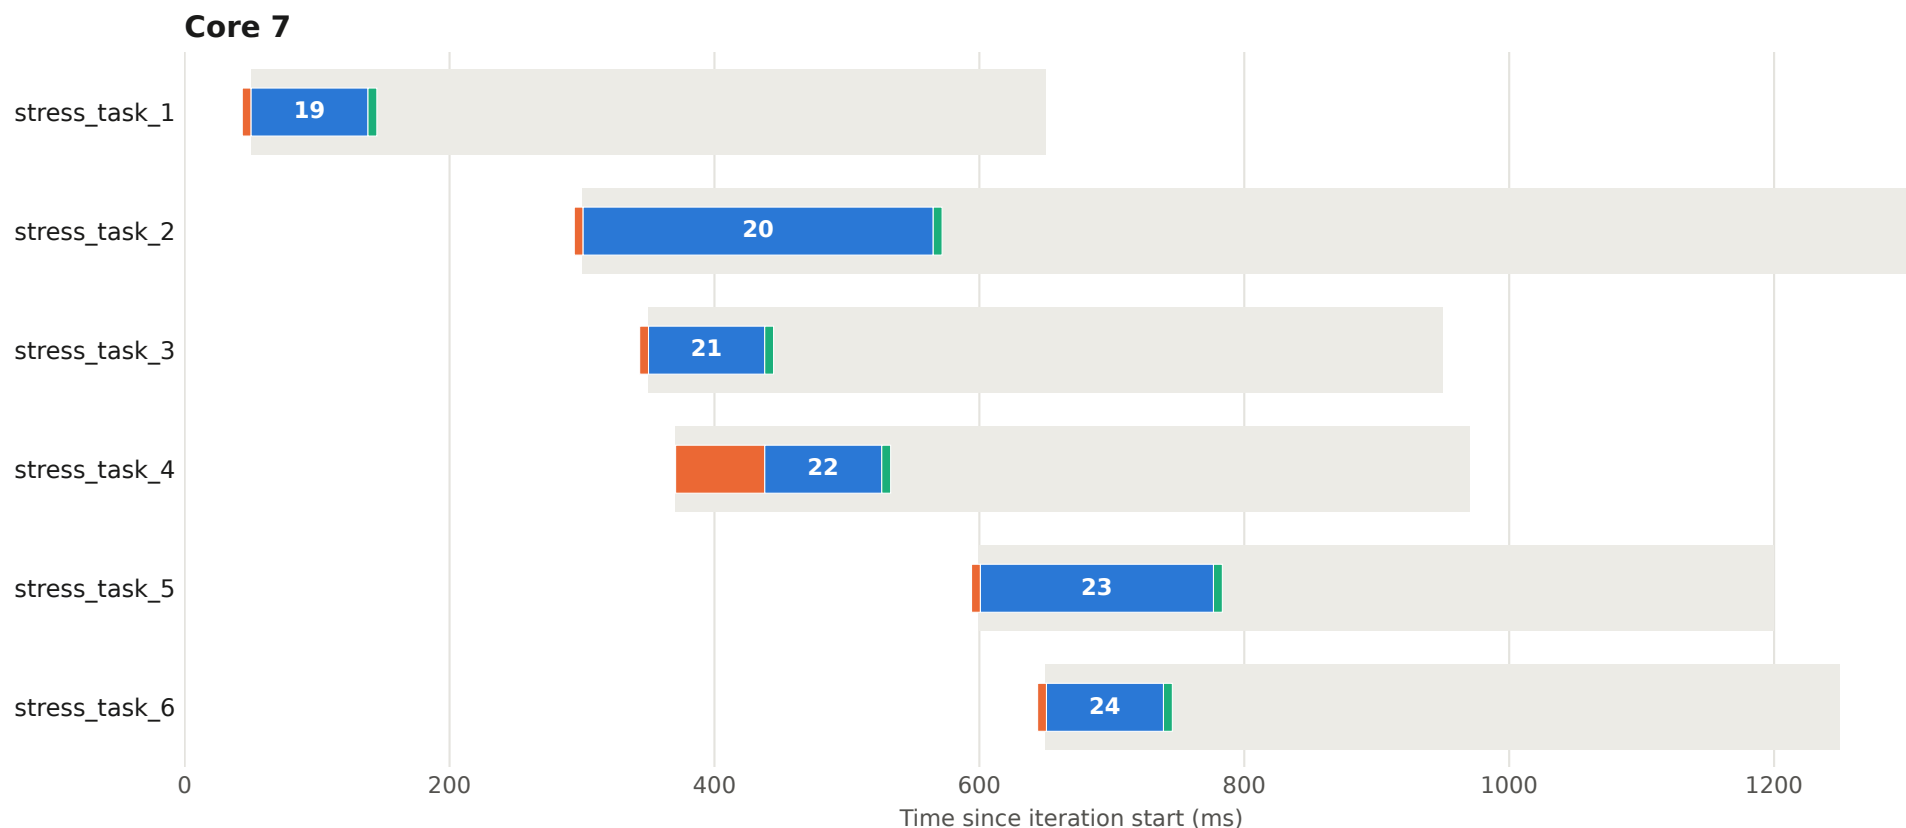


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 31 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

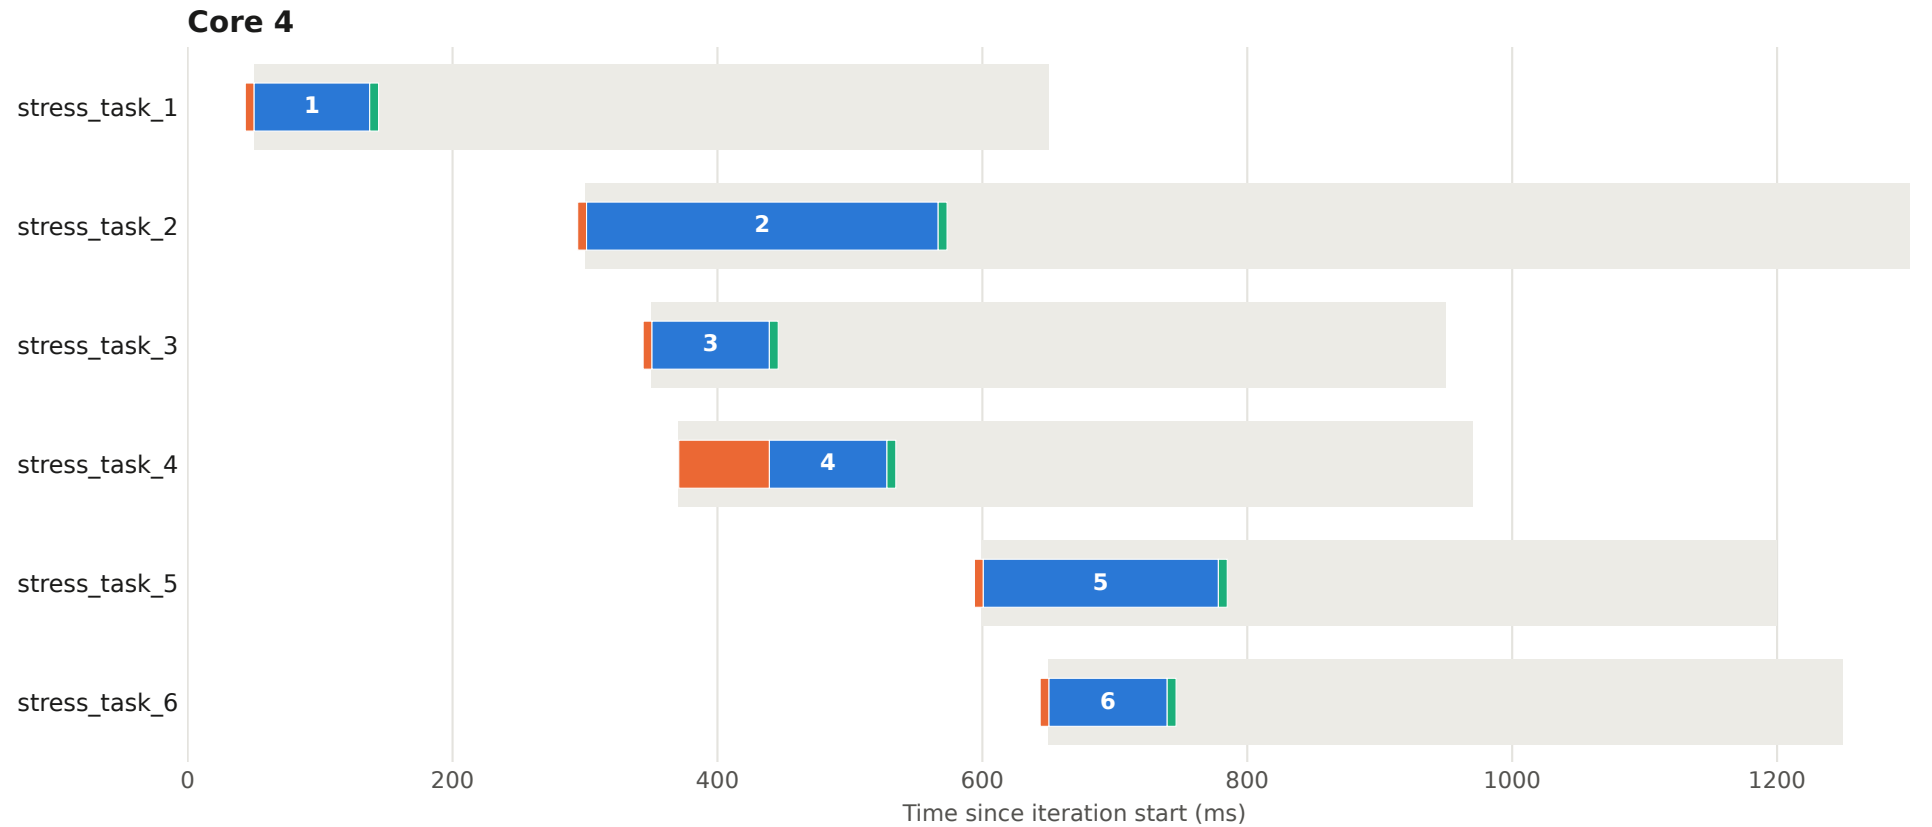


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 31 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

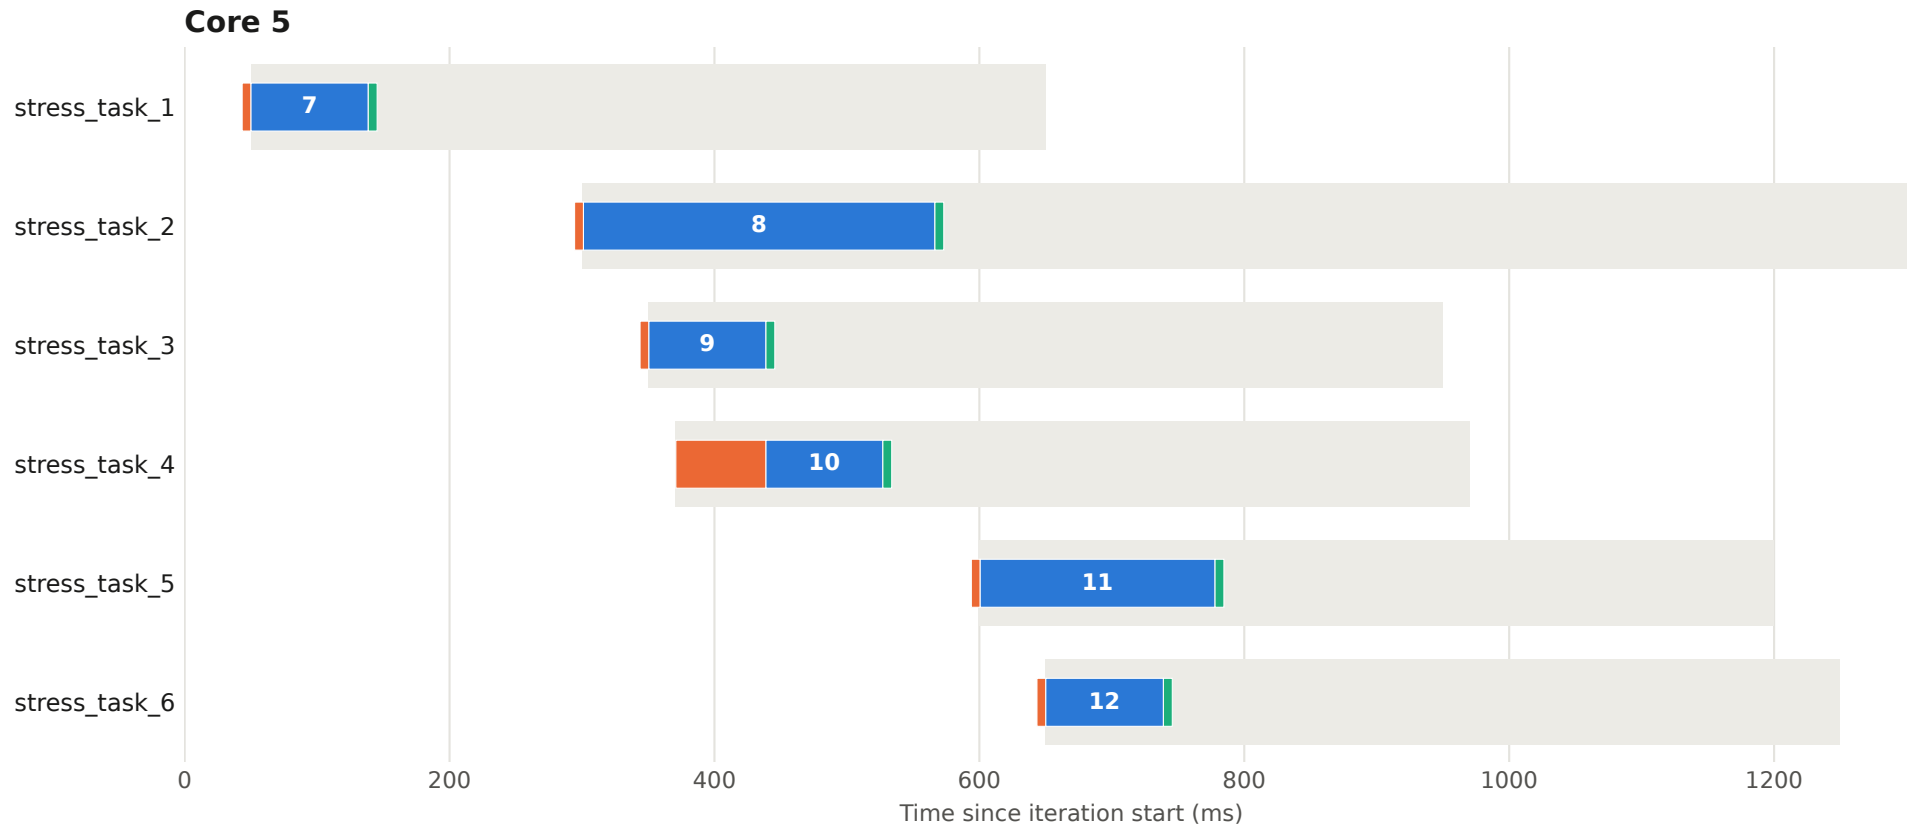


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 31 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

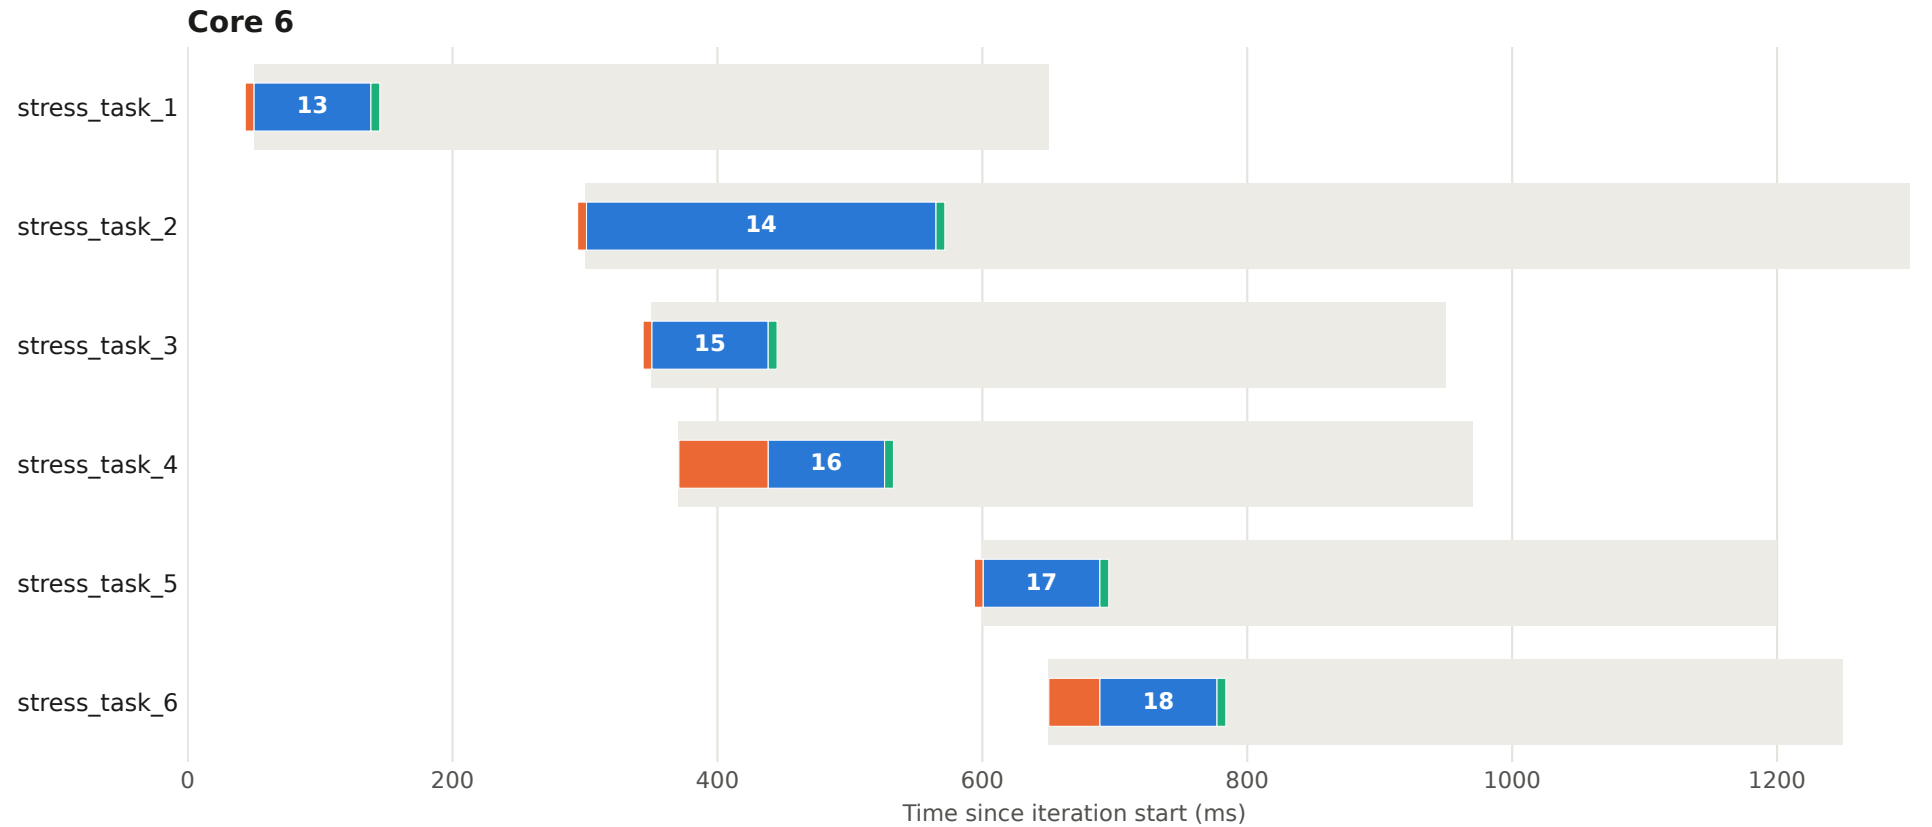


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 31 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

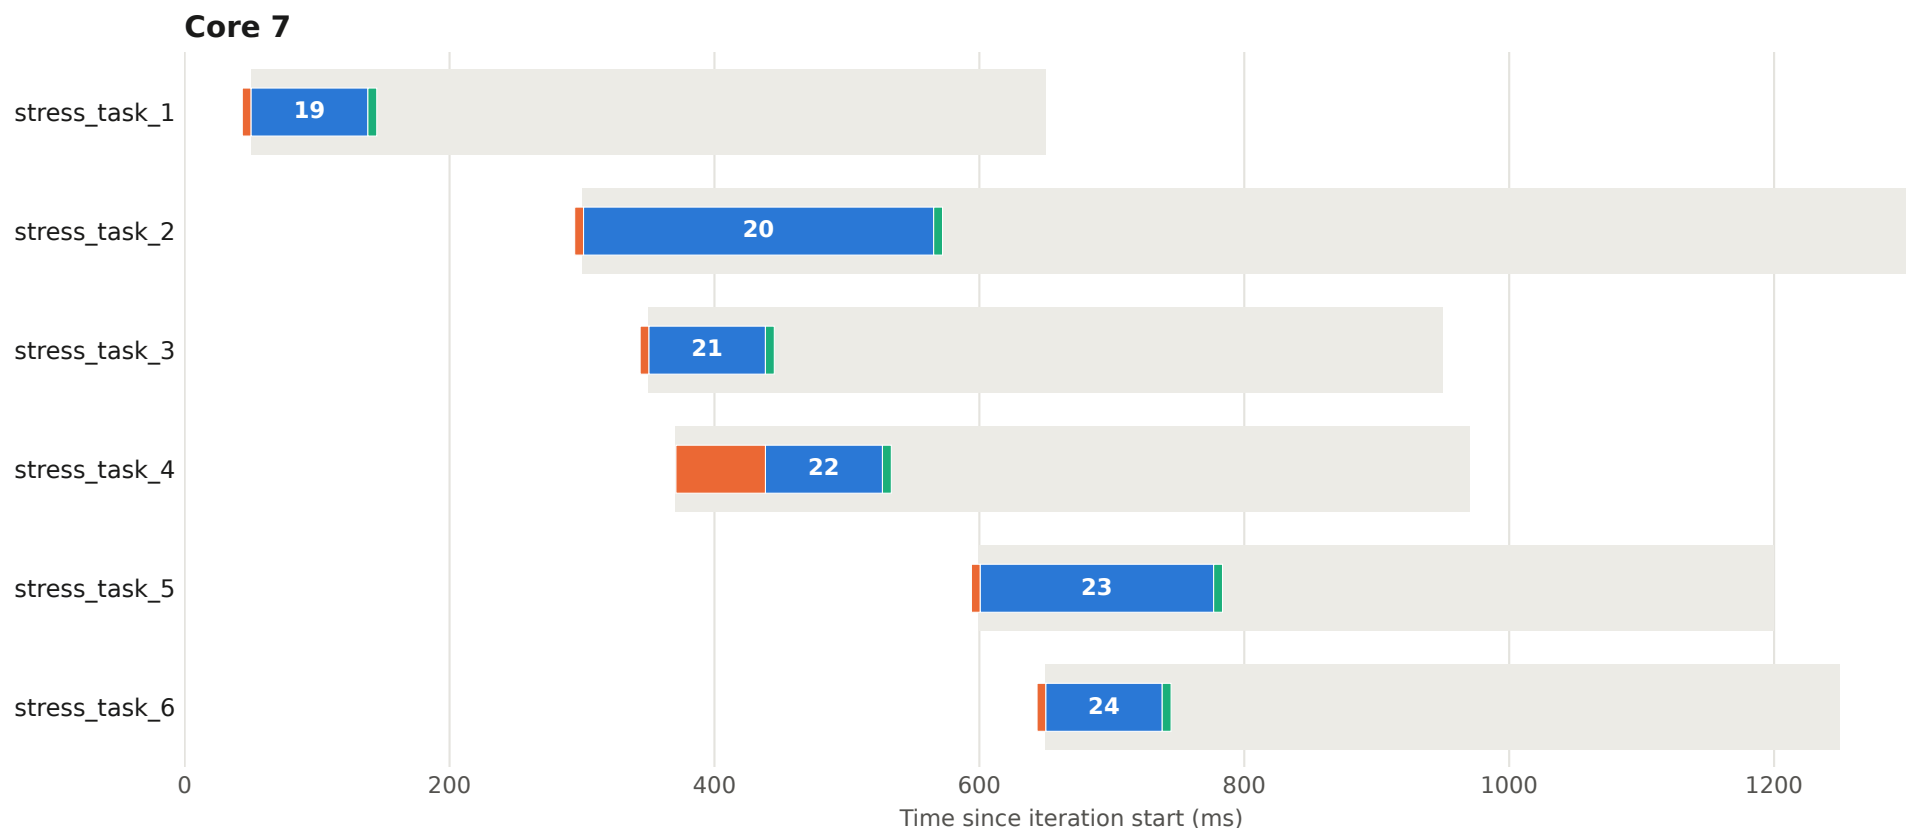


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 32 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

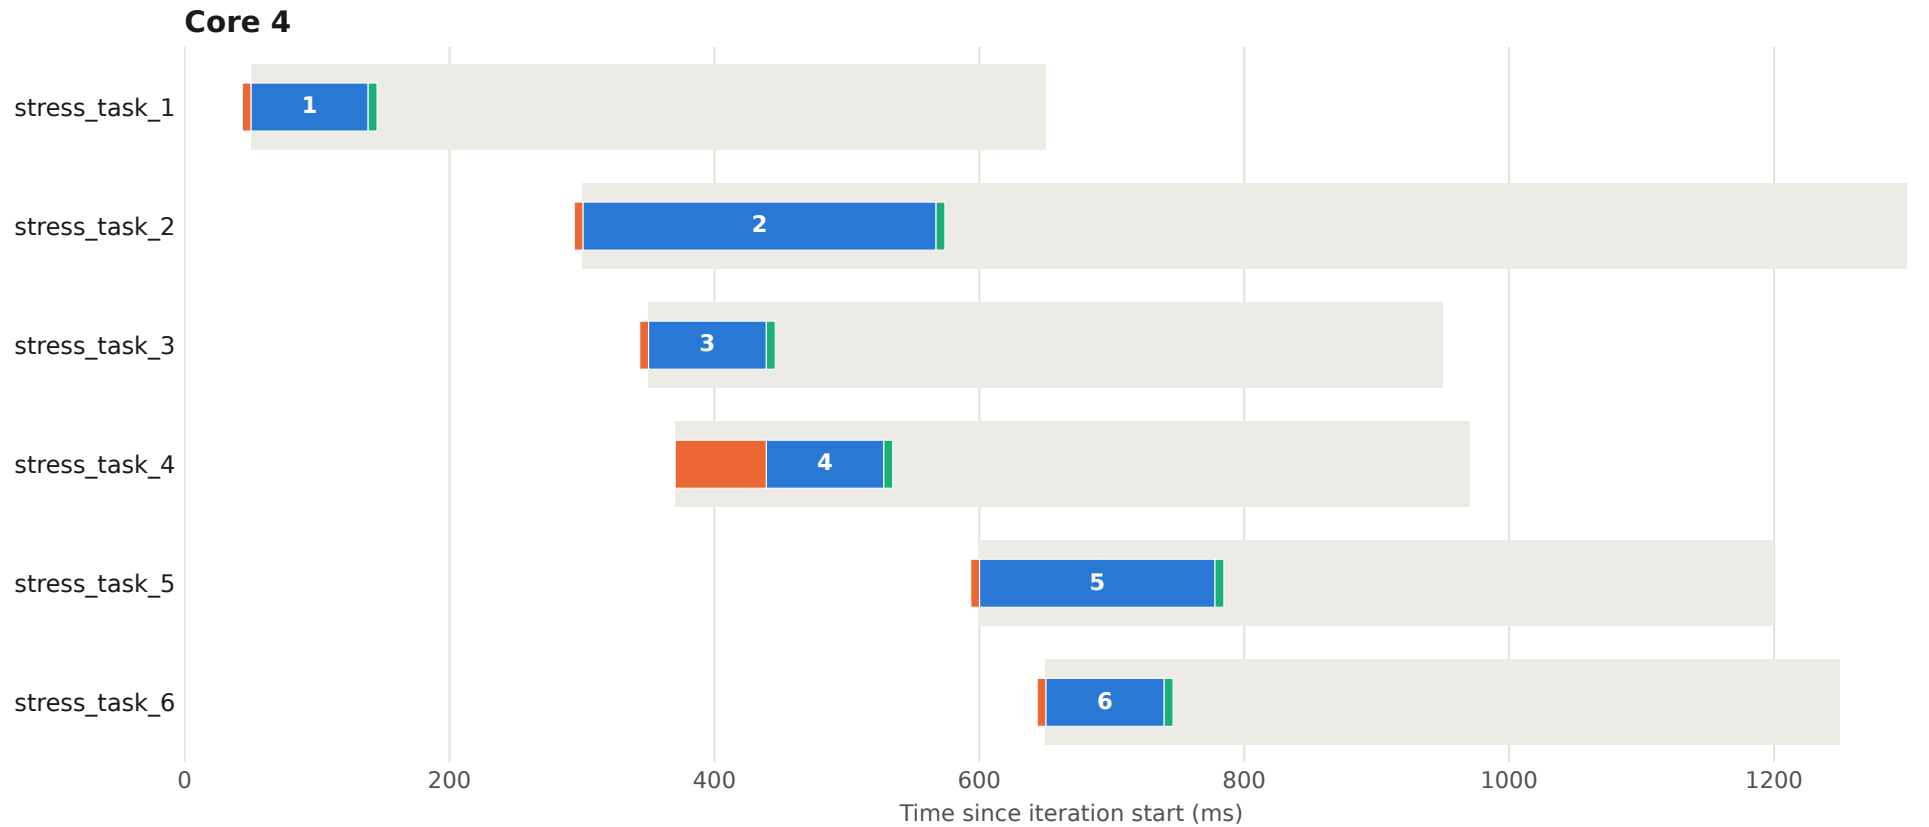


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 32 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

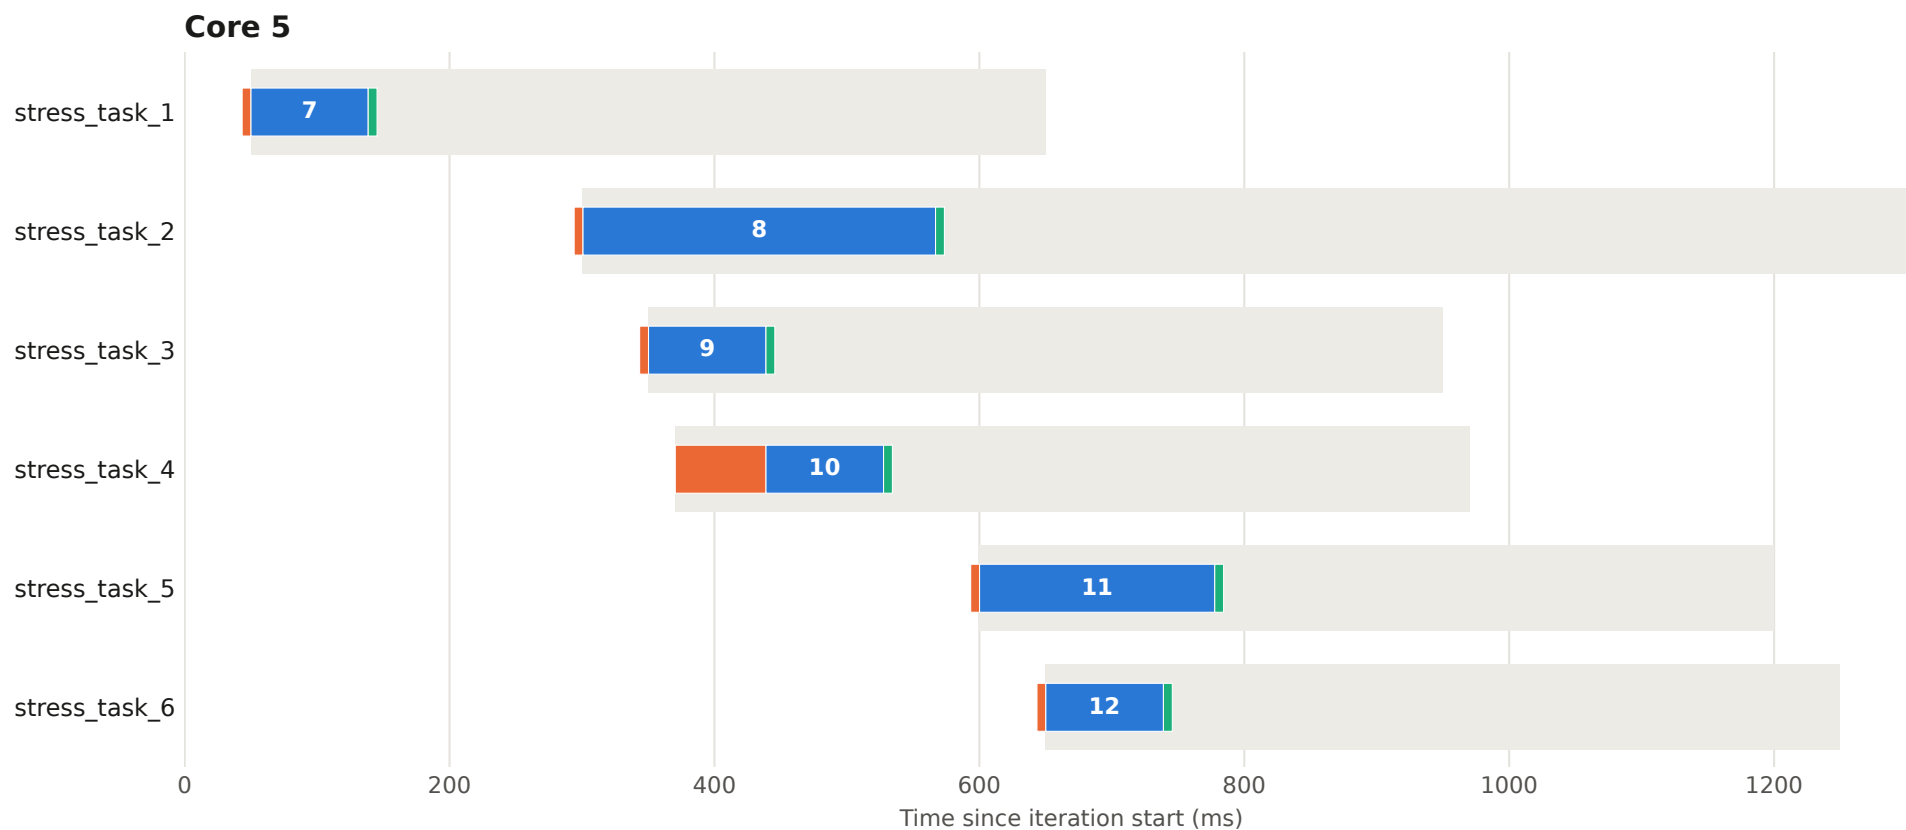


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 32 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

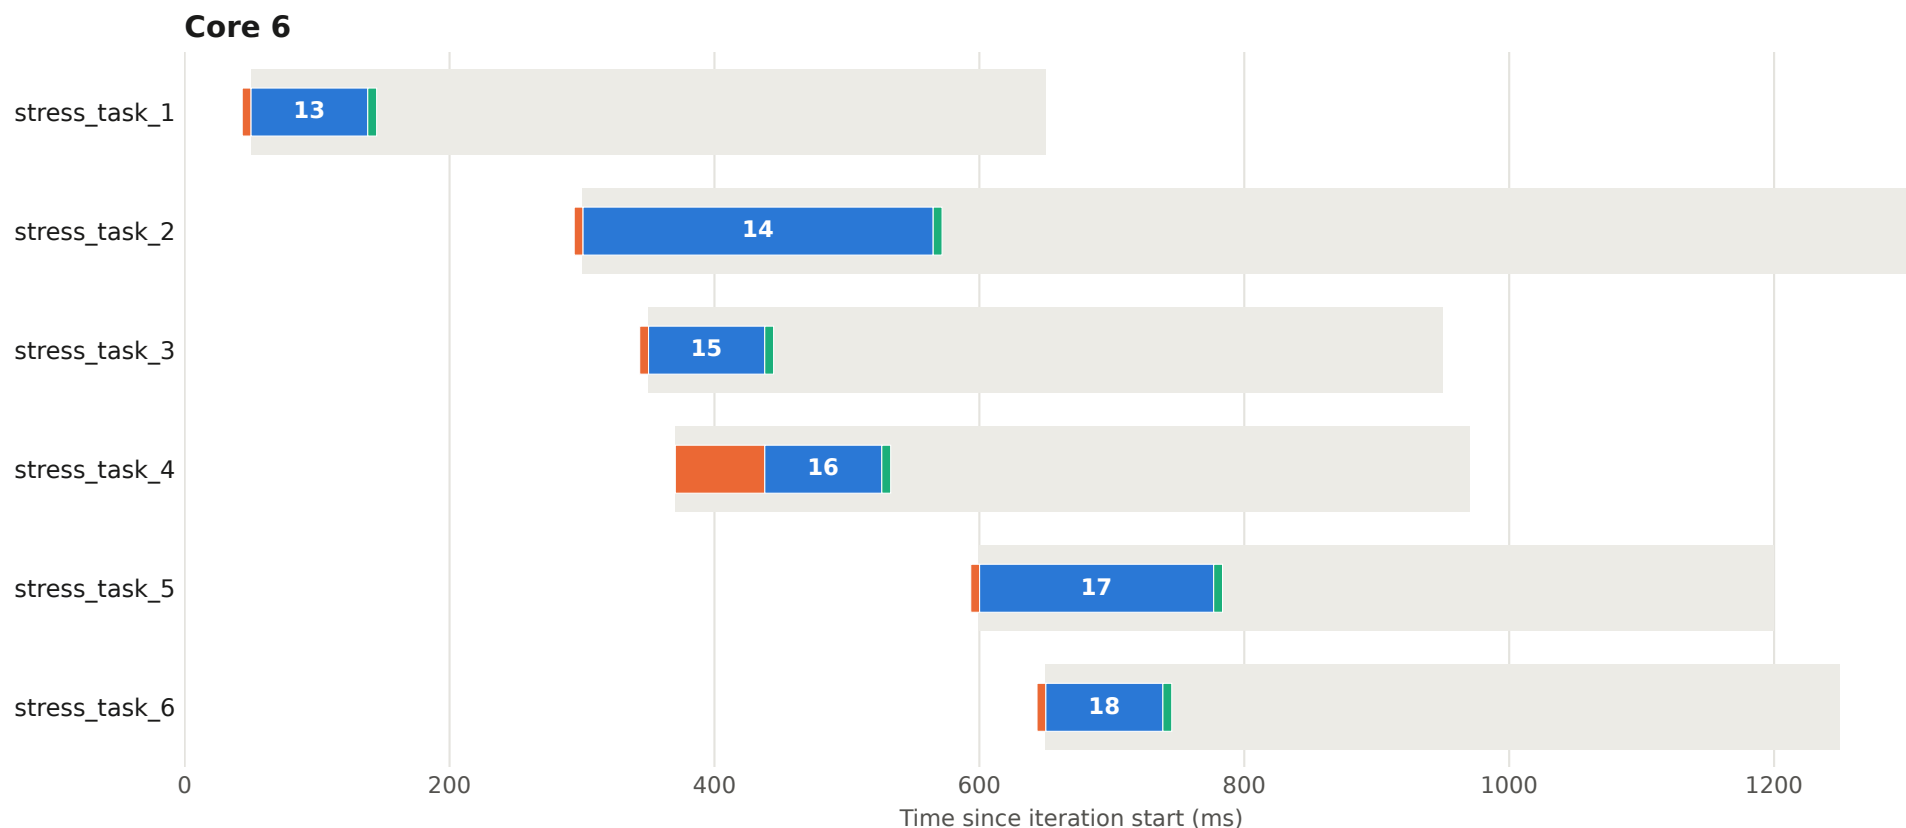


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 32 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

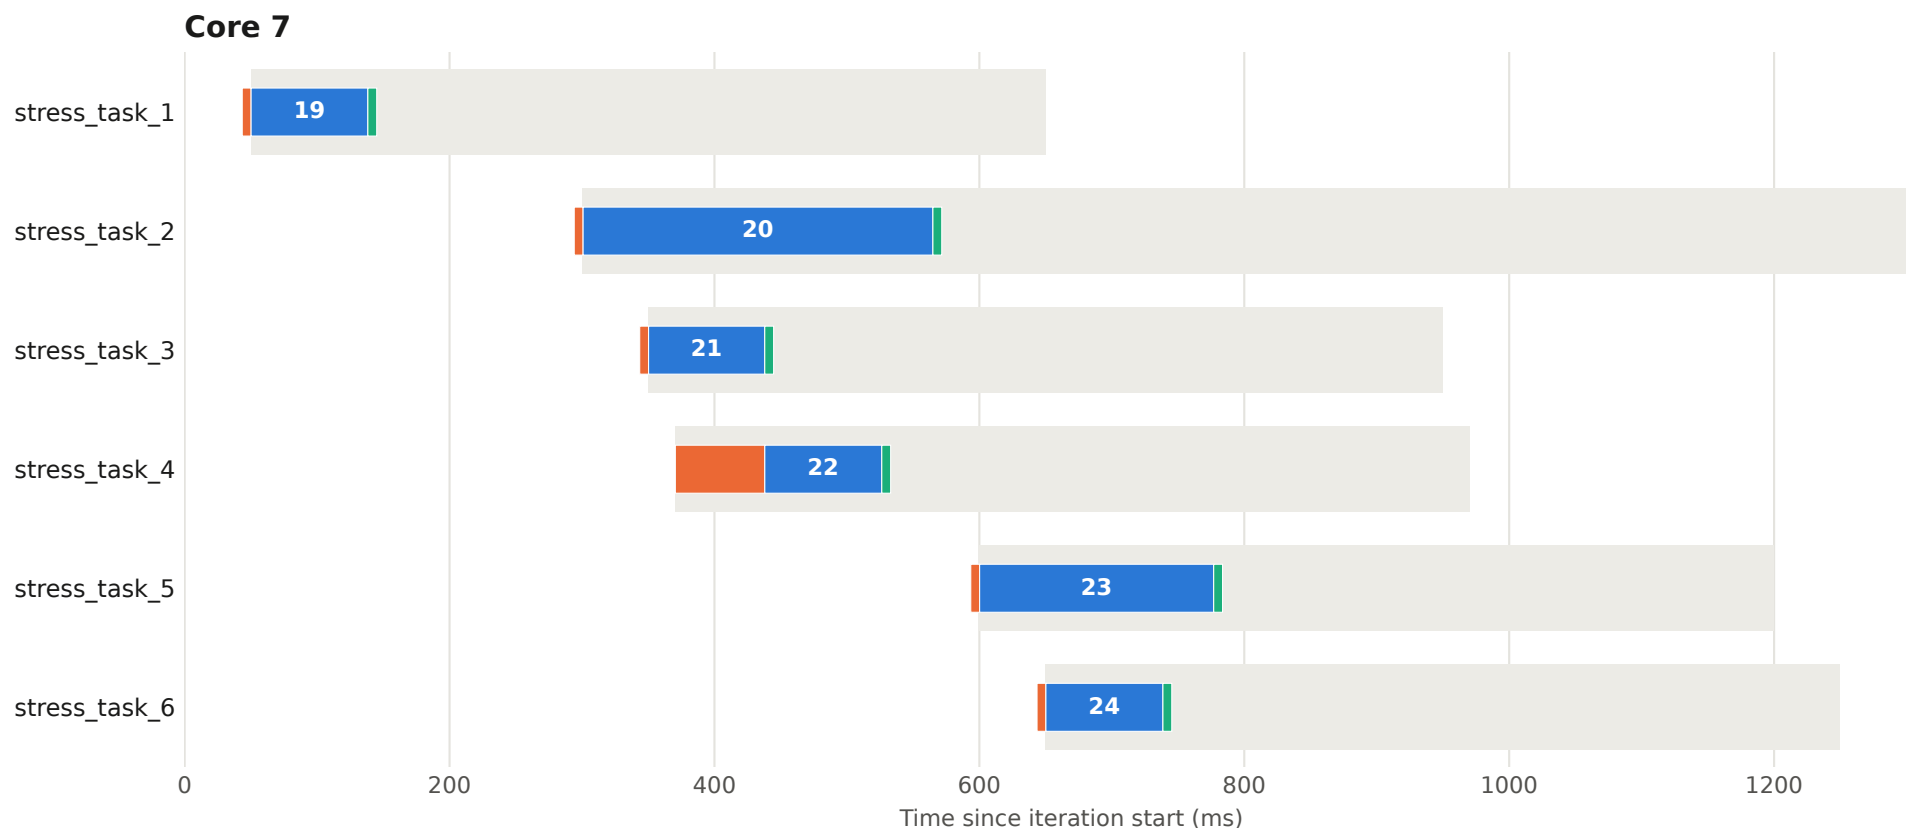


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 33 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

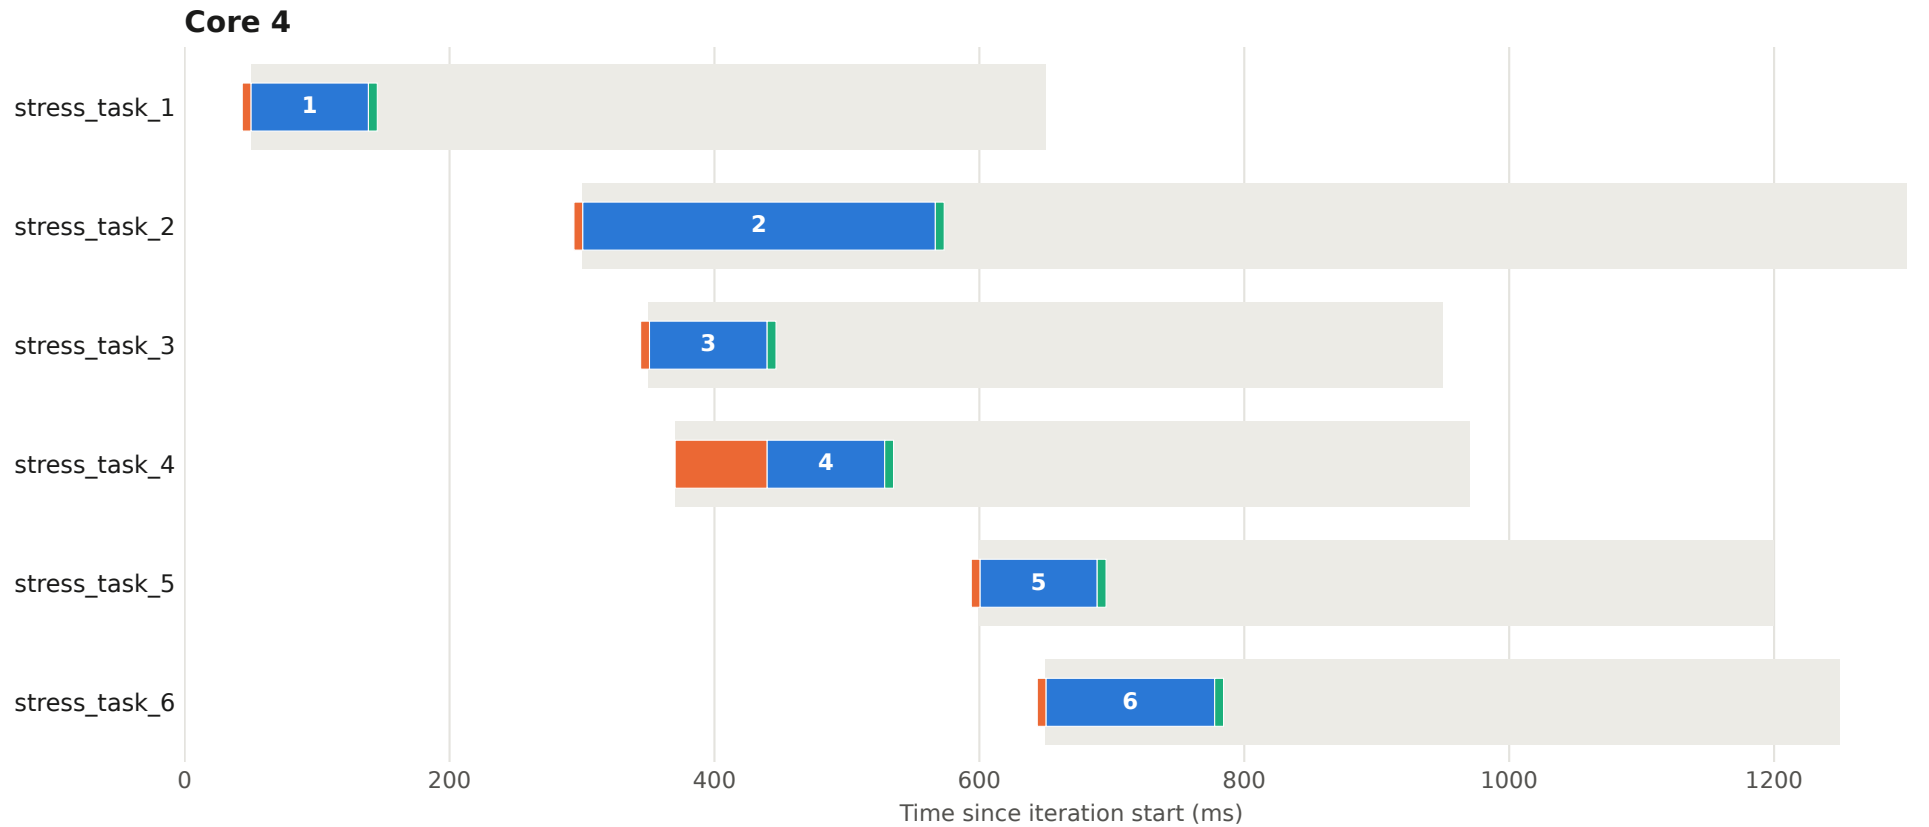


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 33 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

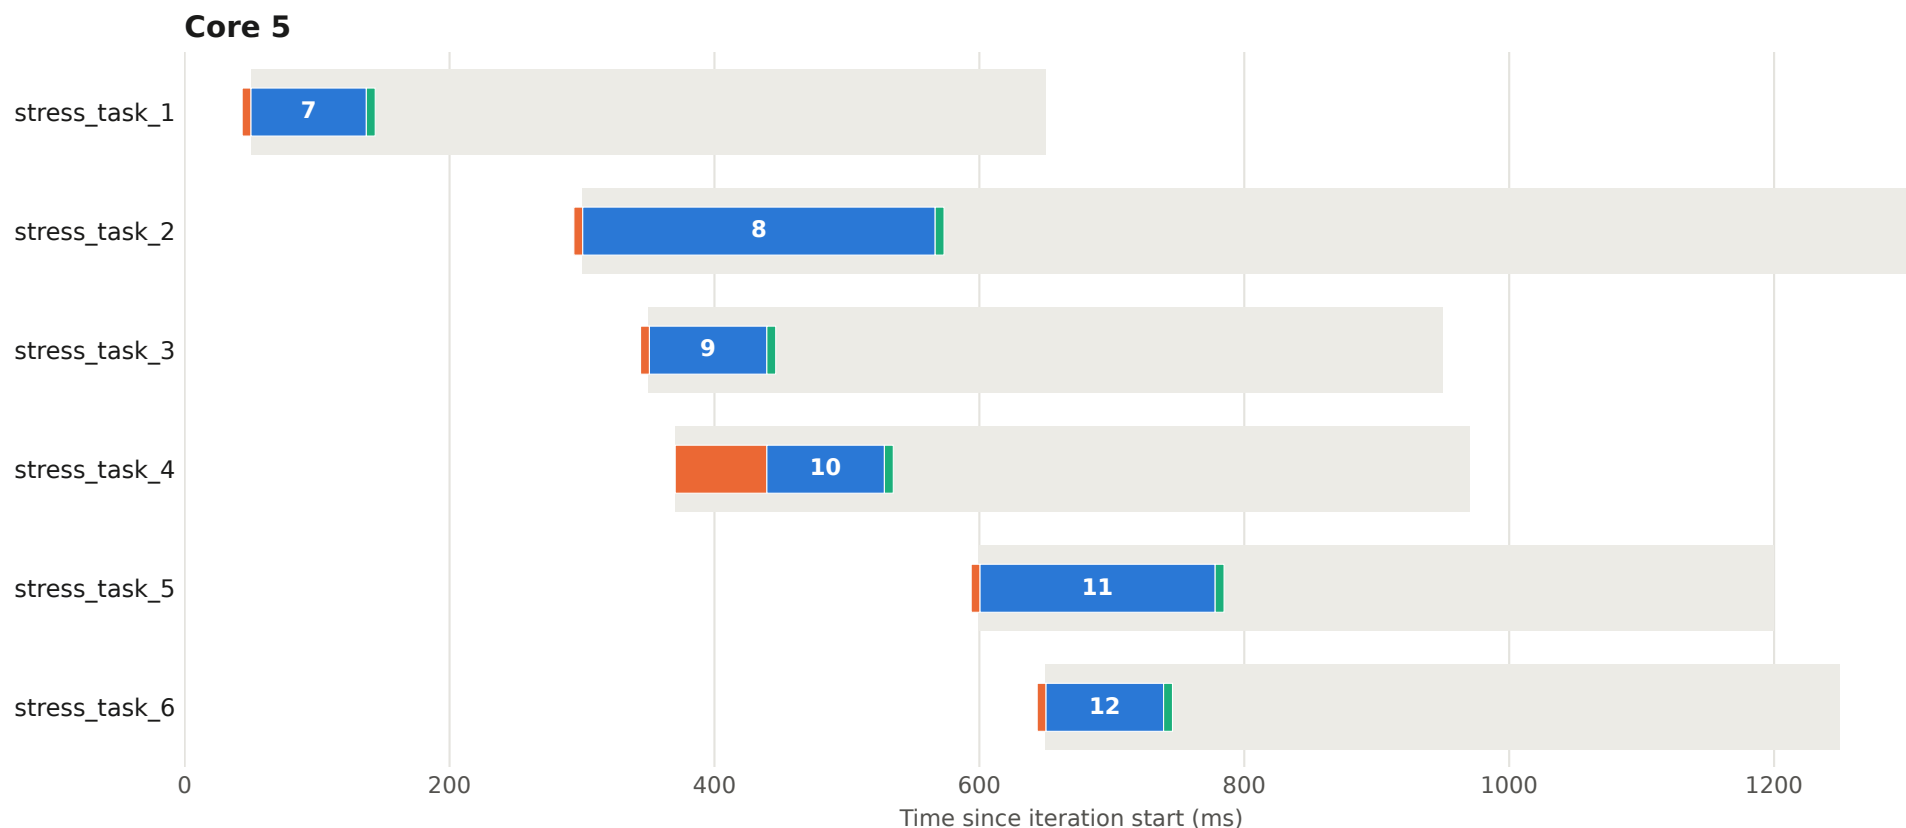


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 33 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

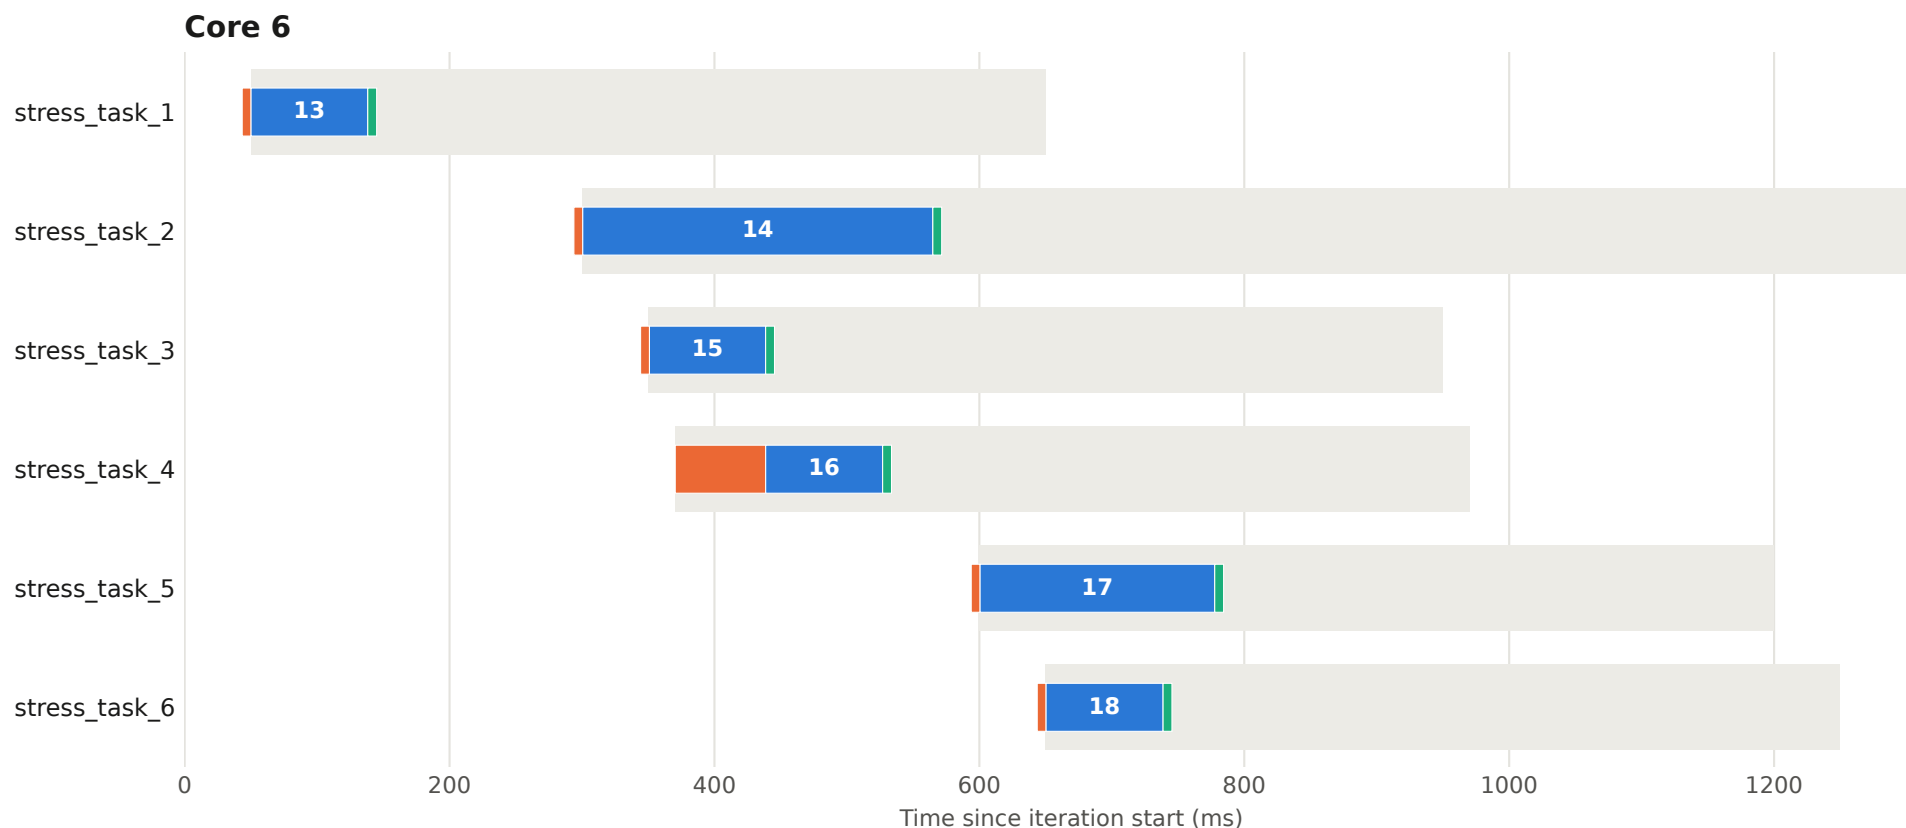


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 33 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

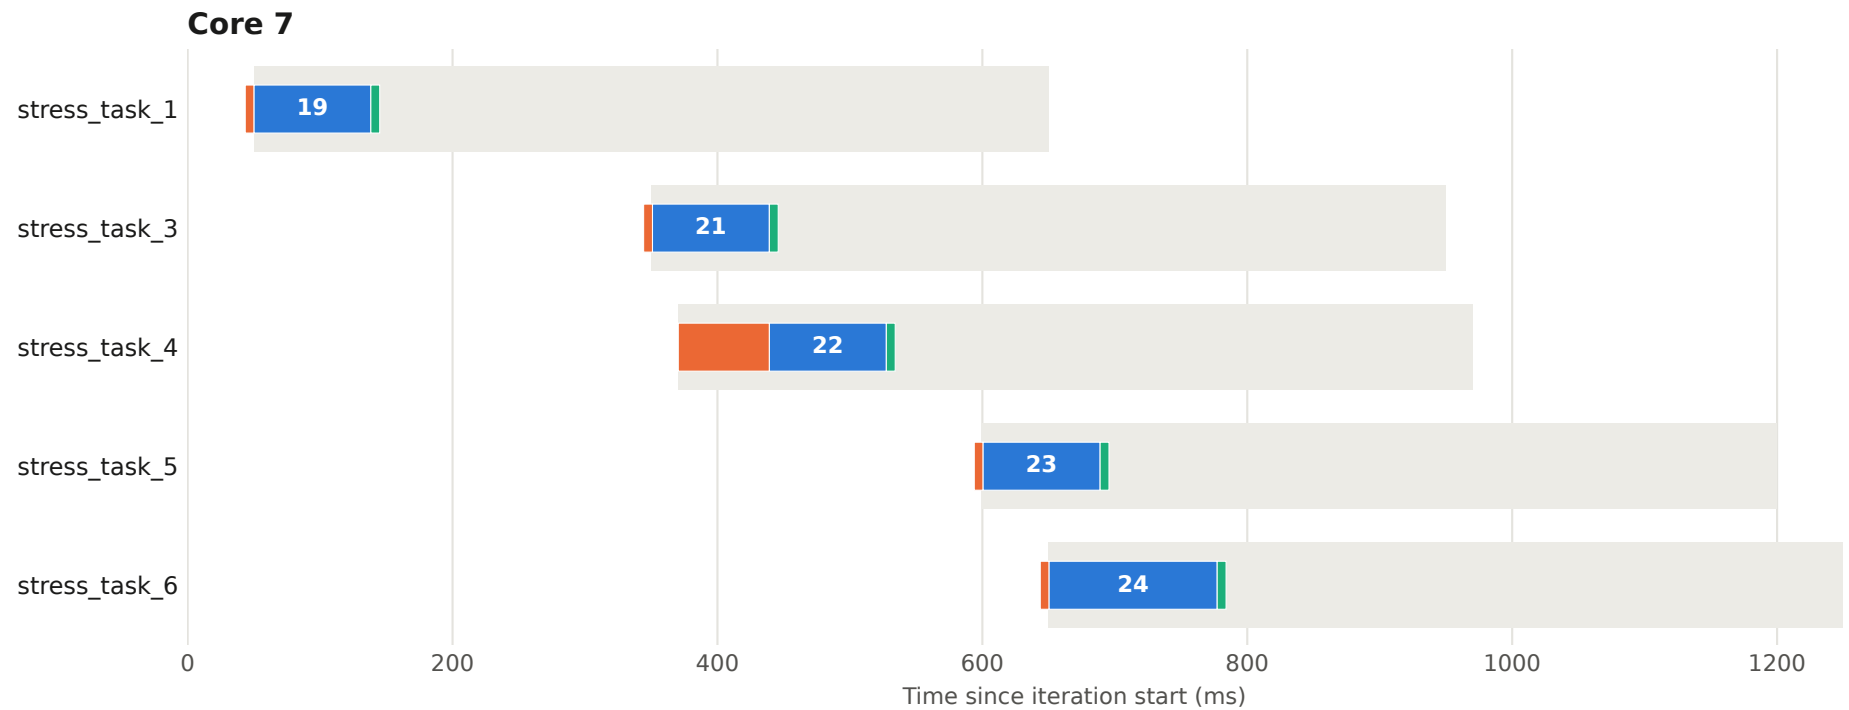


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 34 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

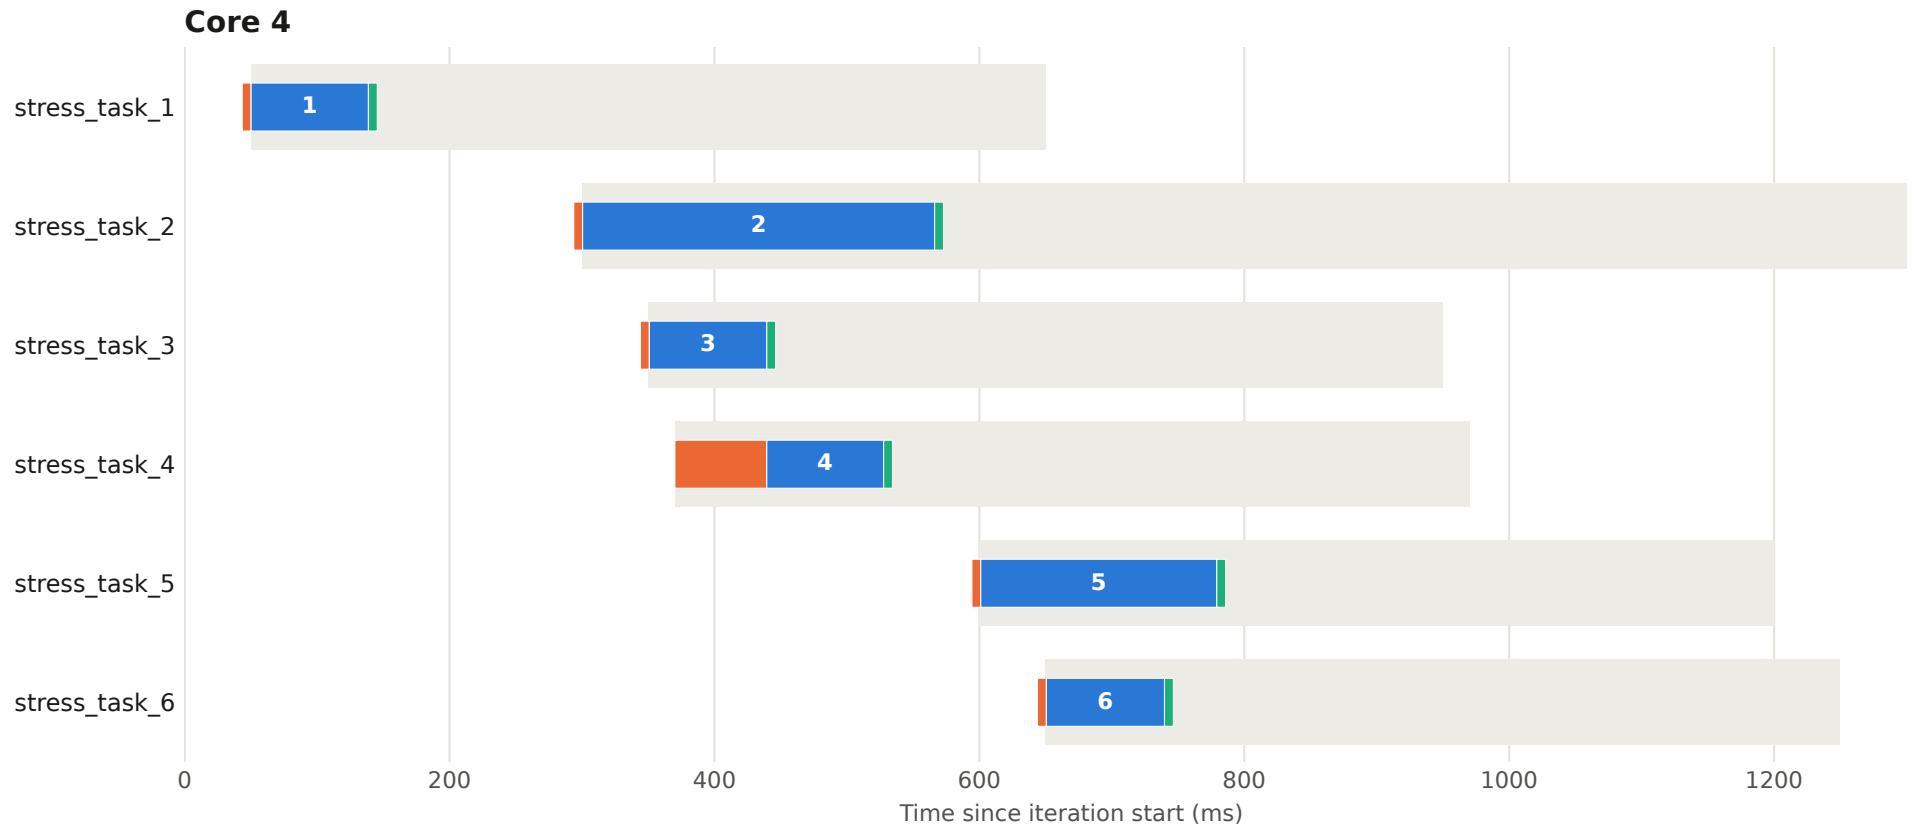


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 34 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

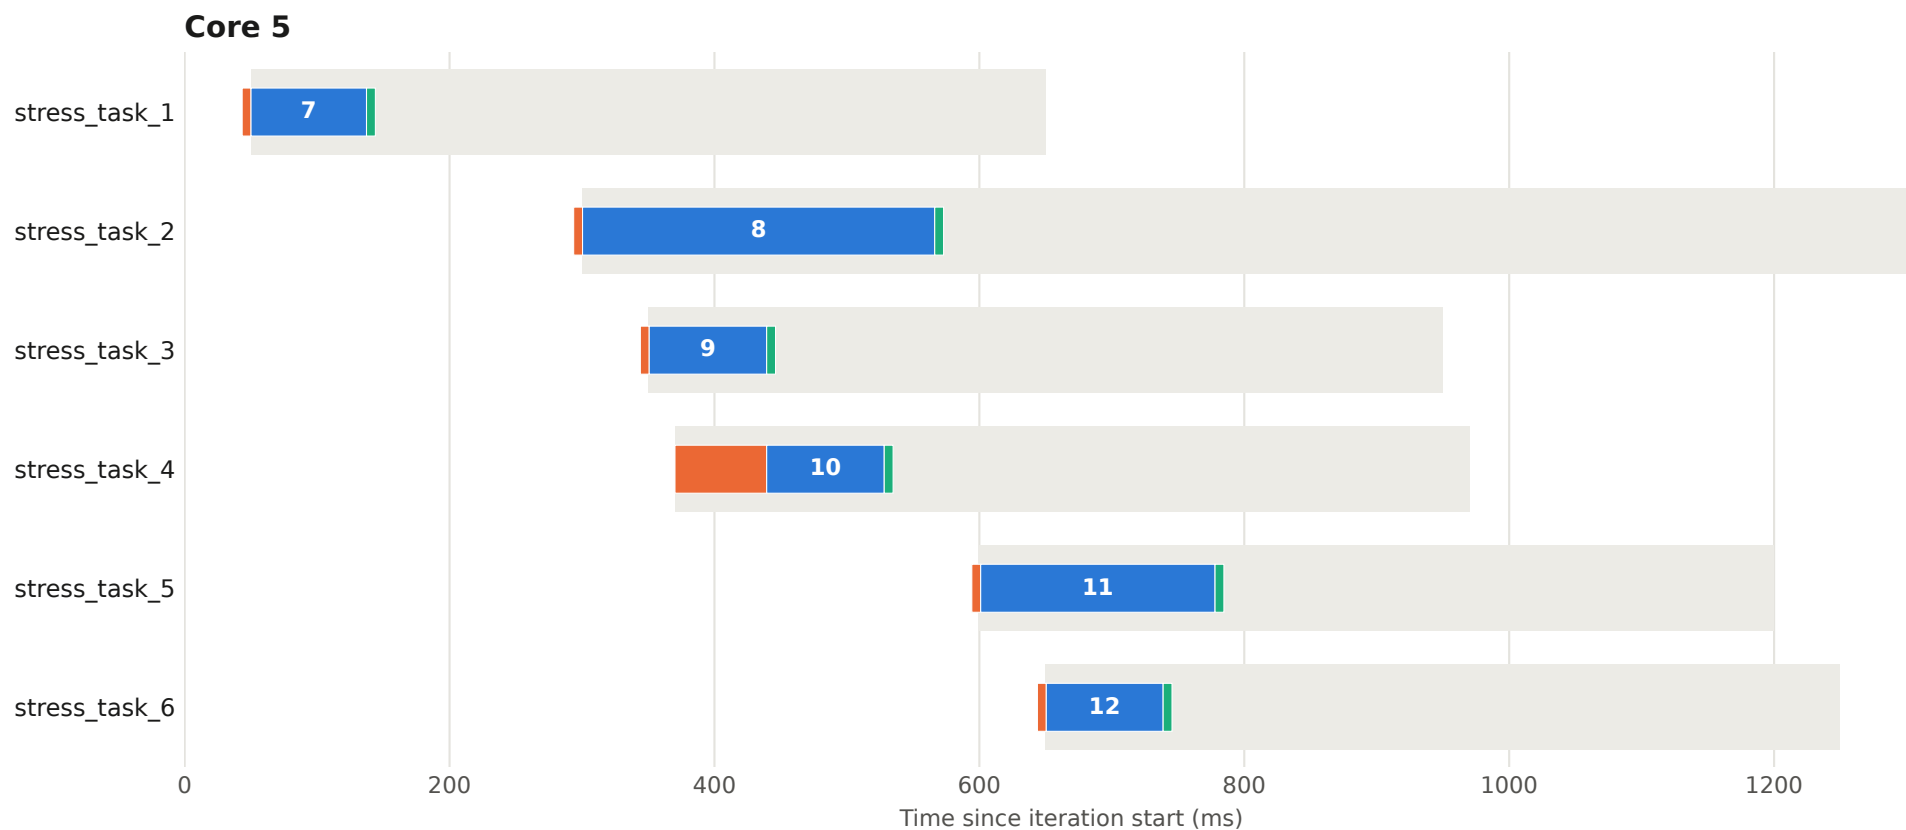


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 34 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

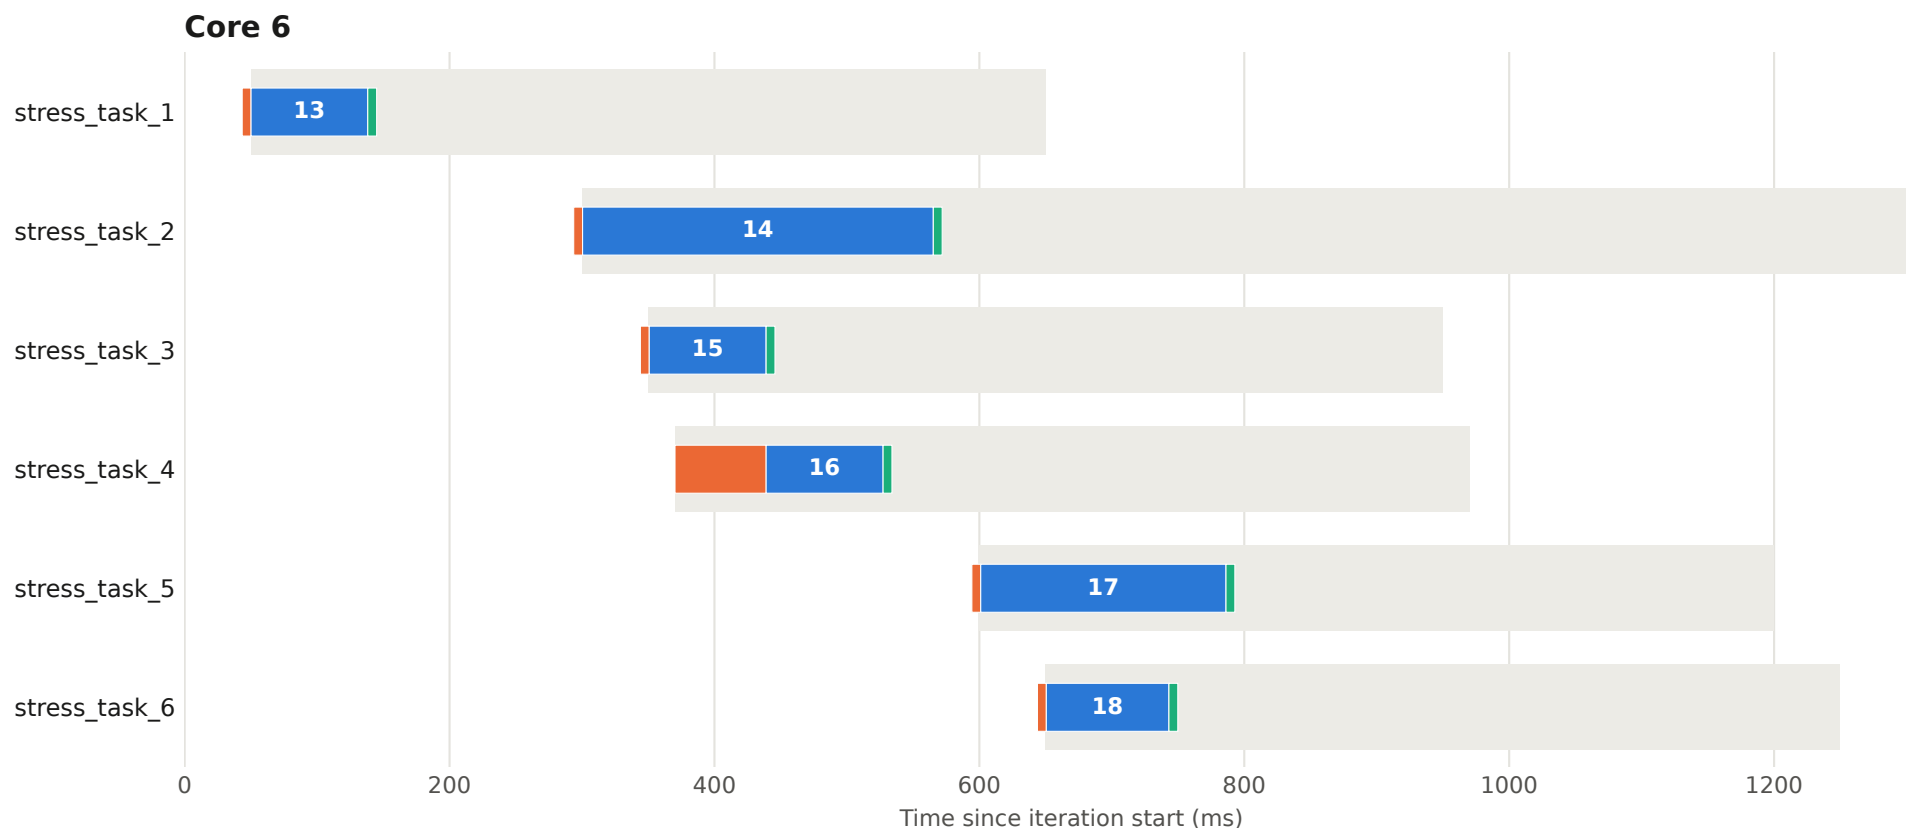


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 34 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

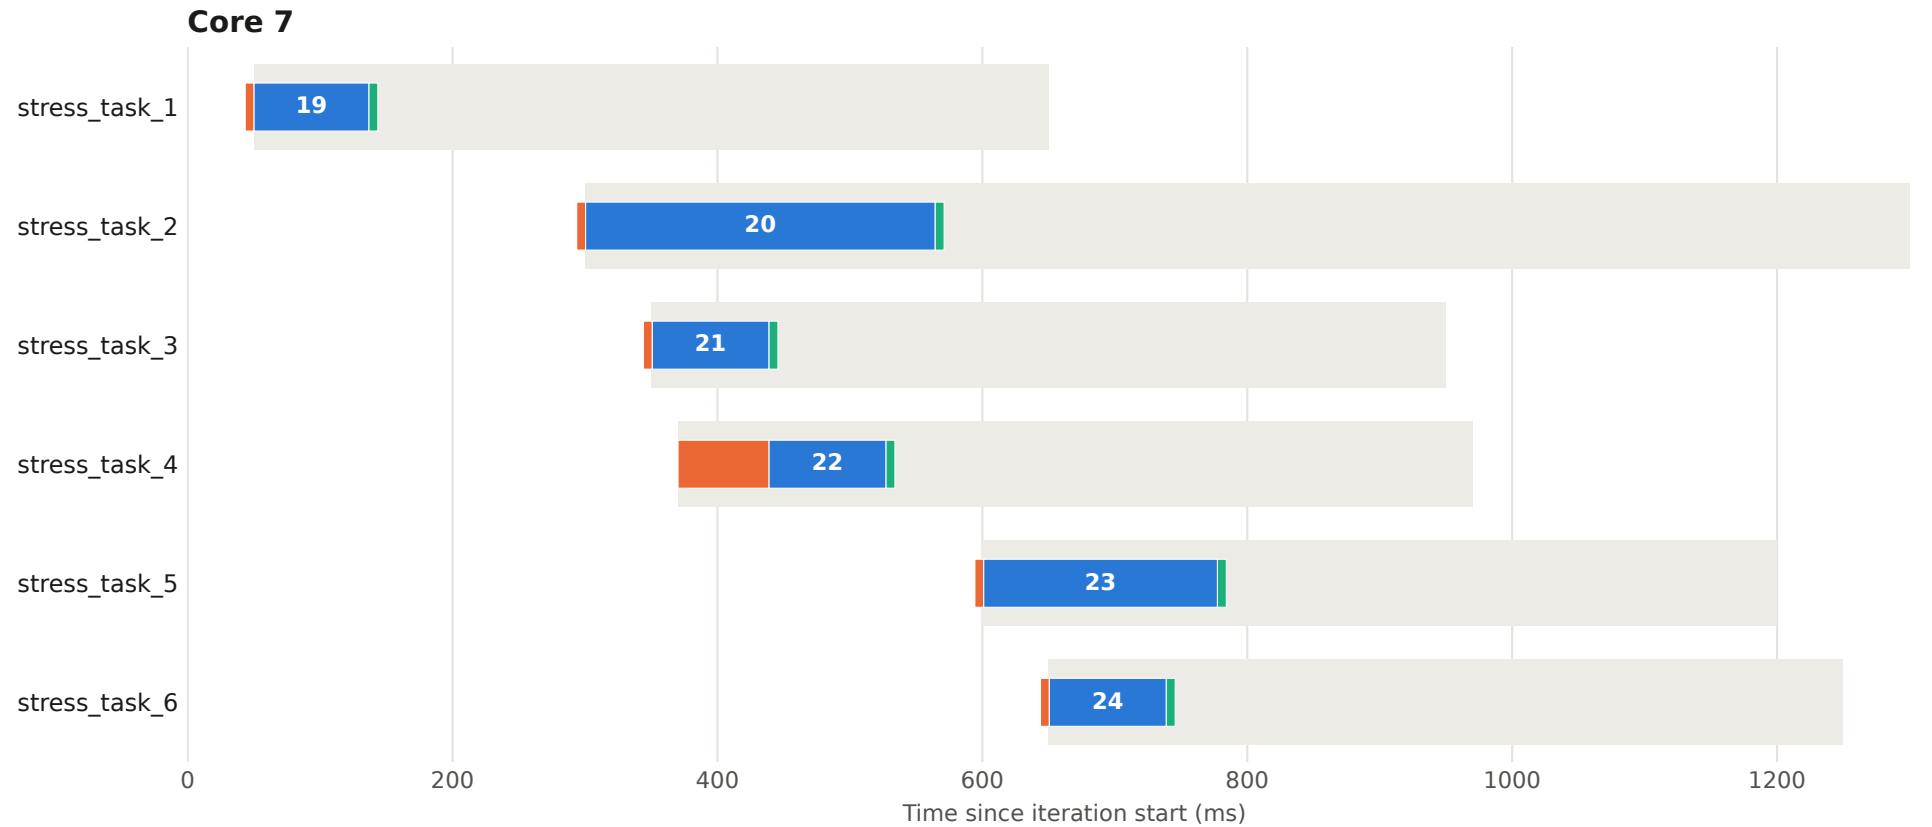


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 35 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

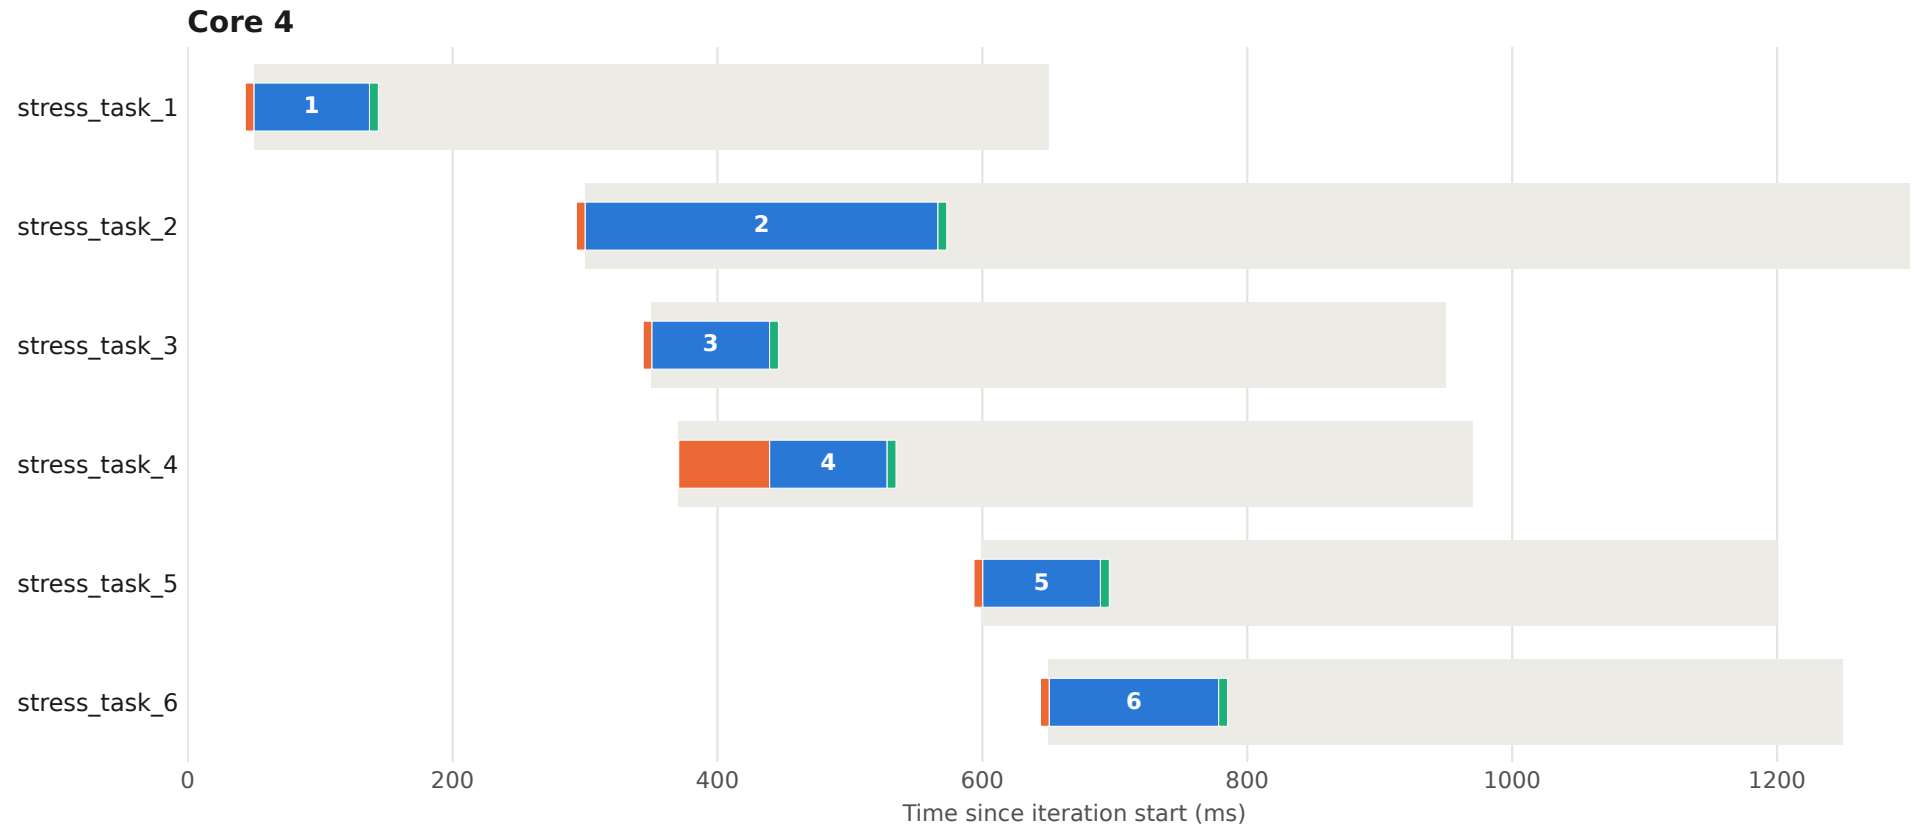


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 35 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

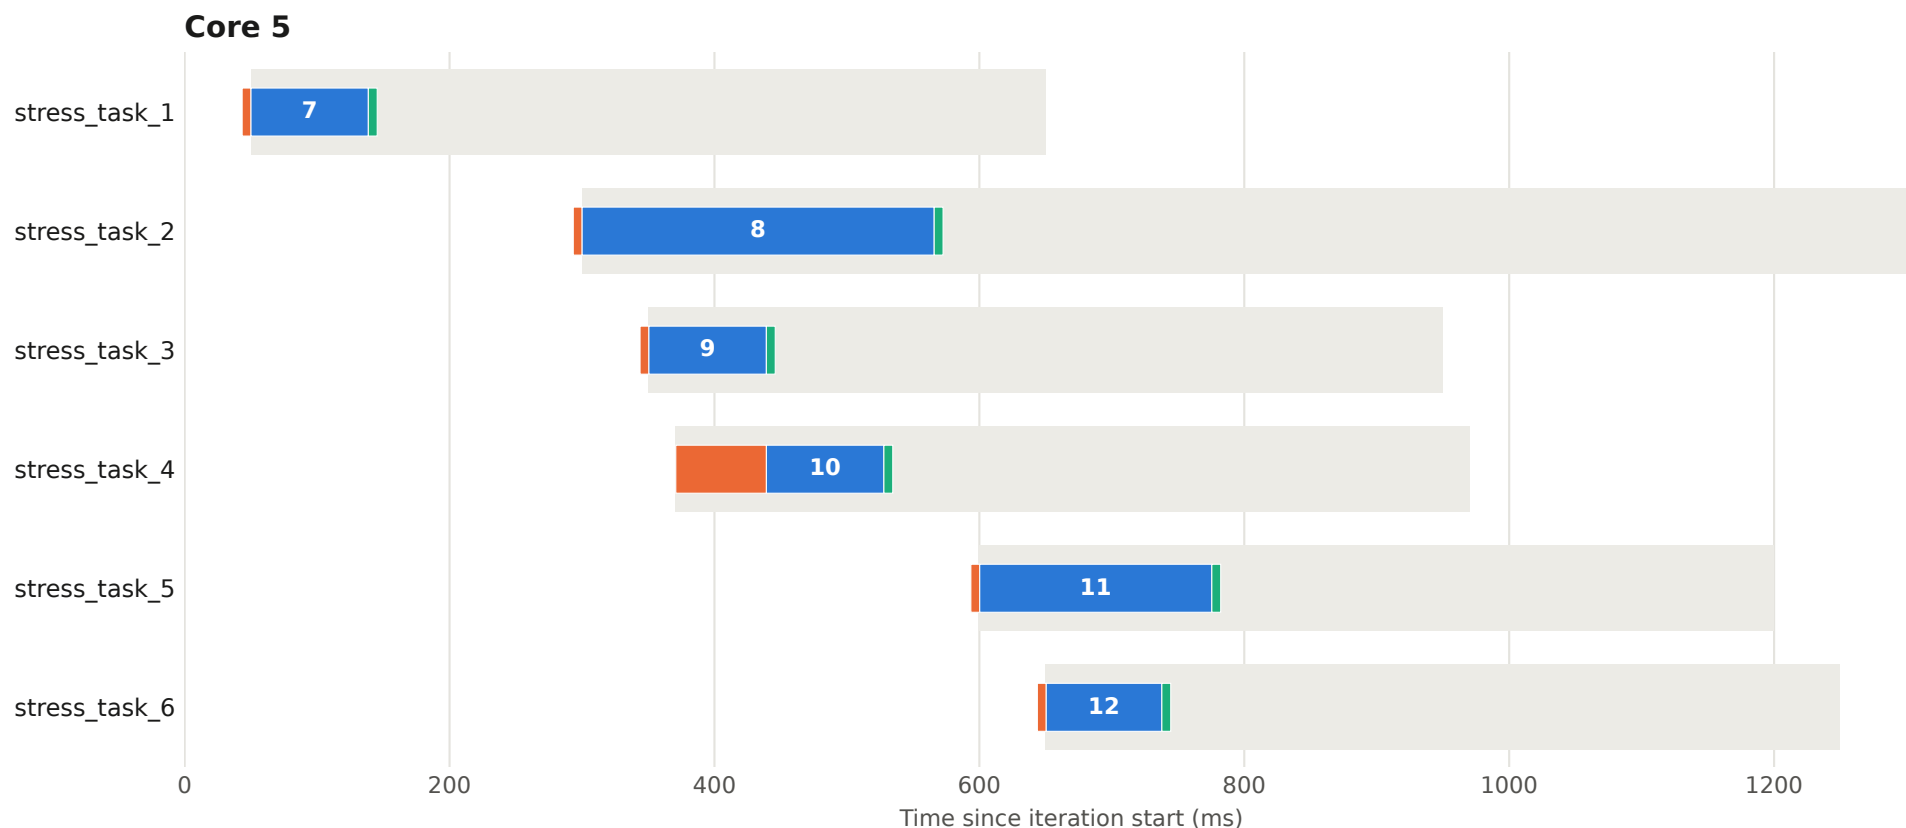


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 35 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

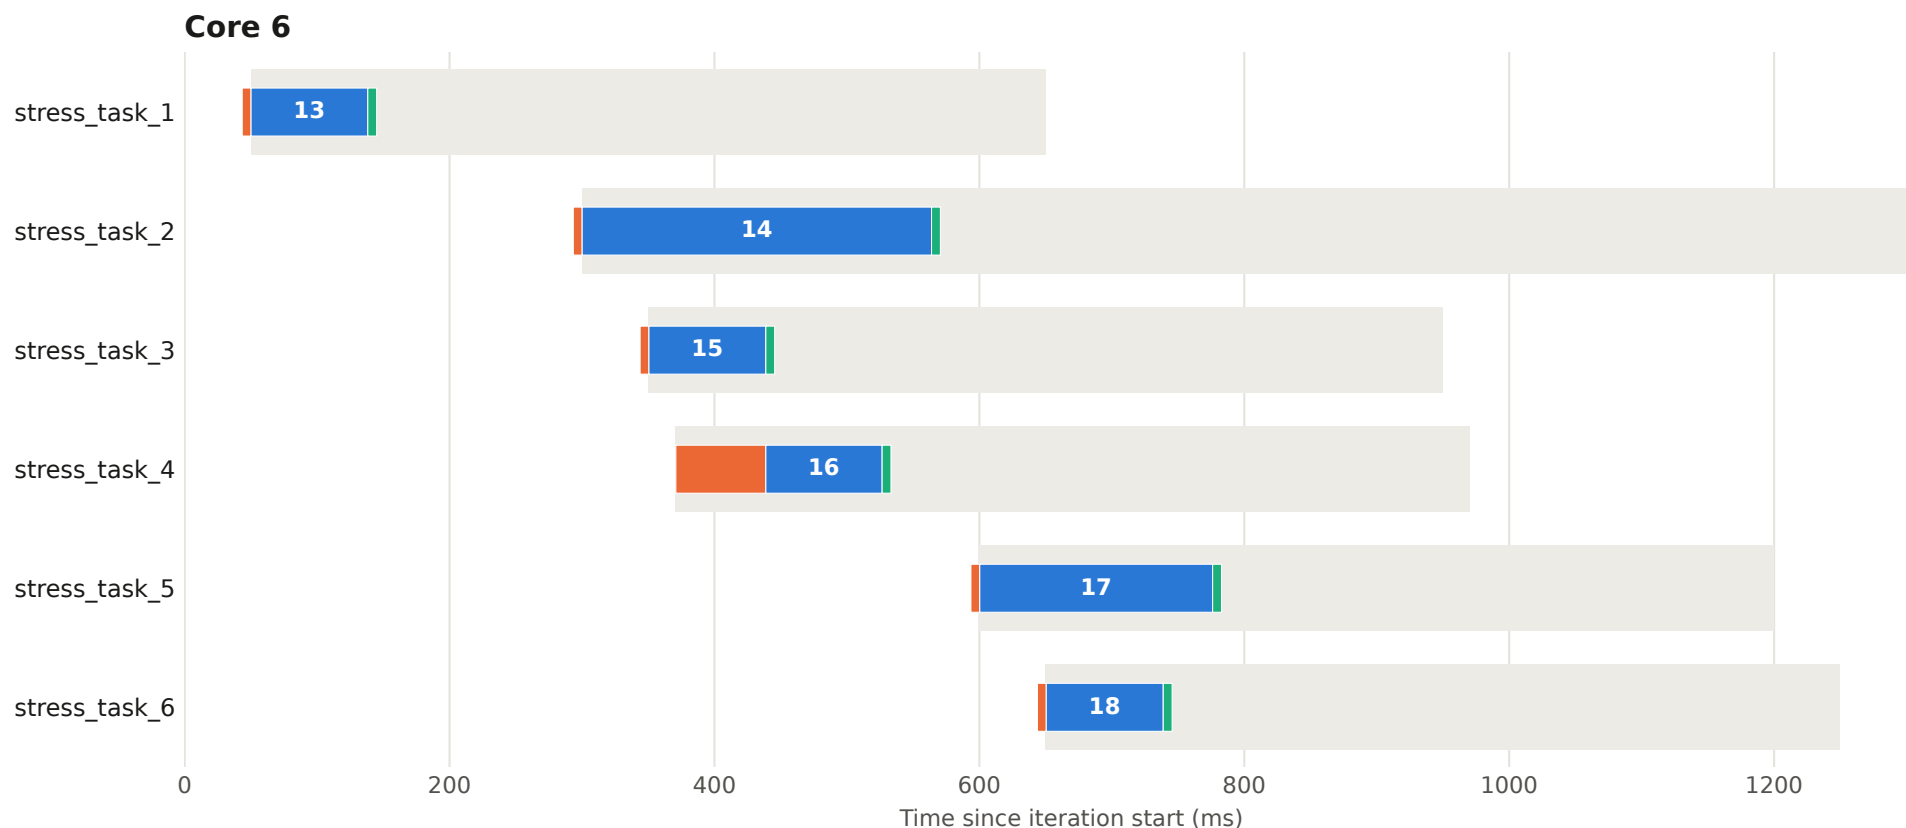


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 35 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

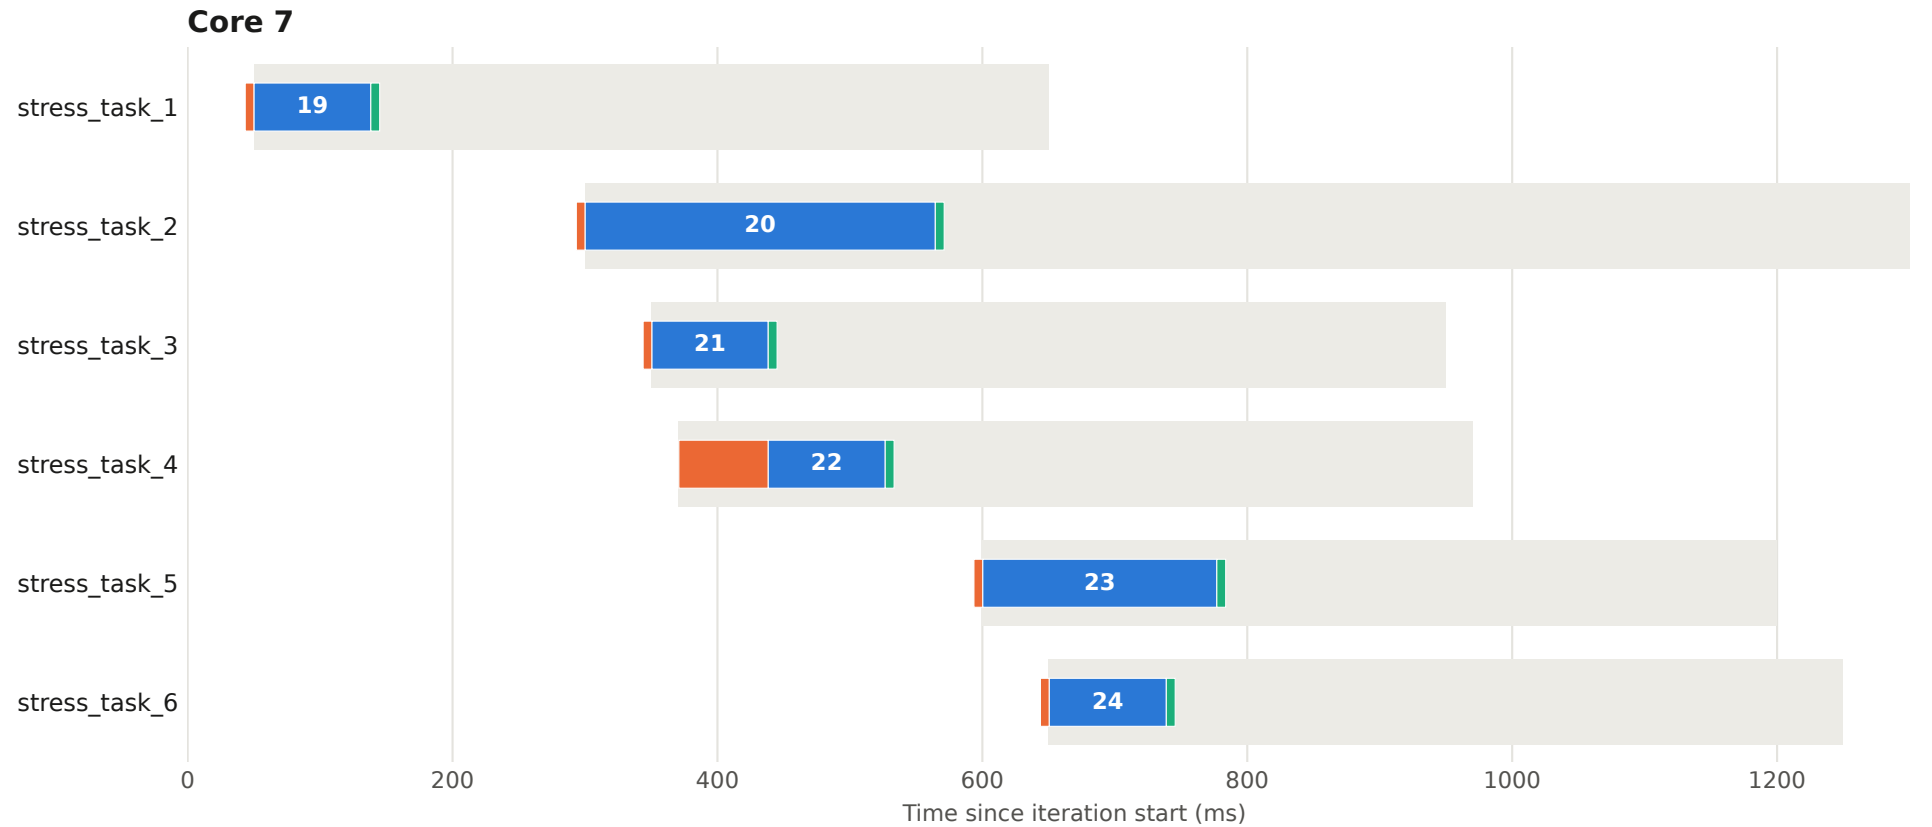


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 36 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

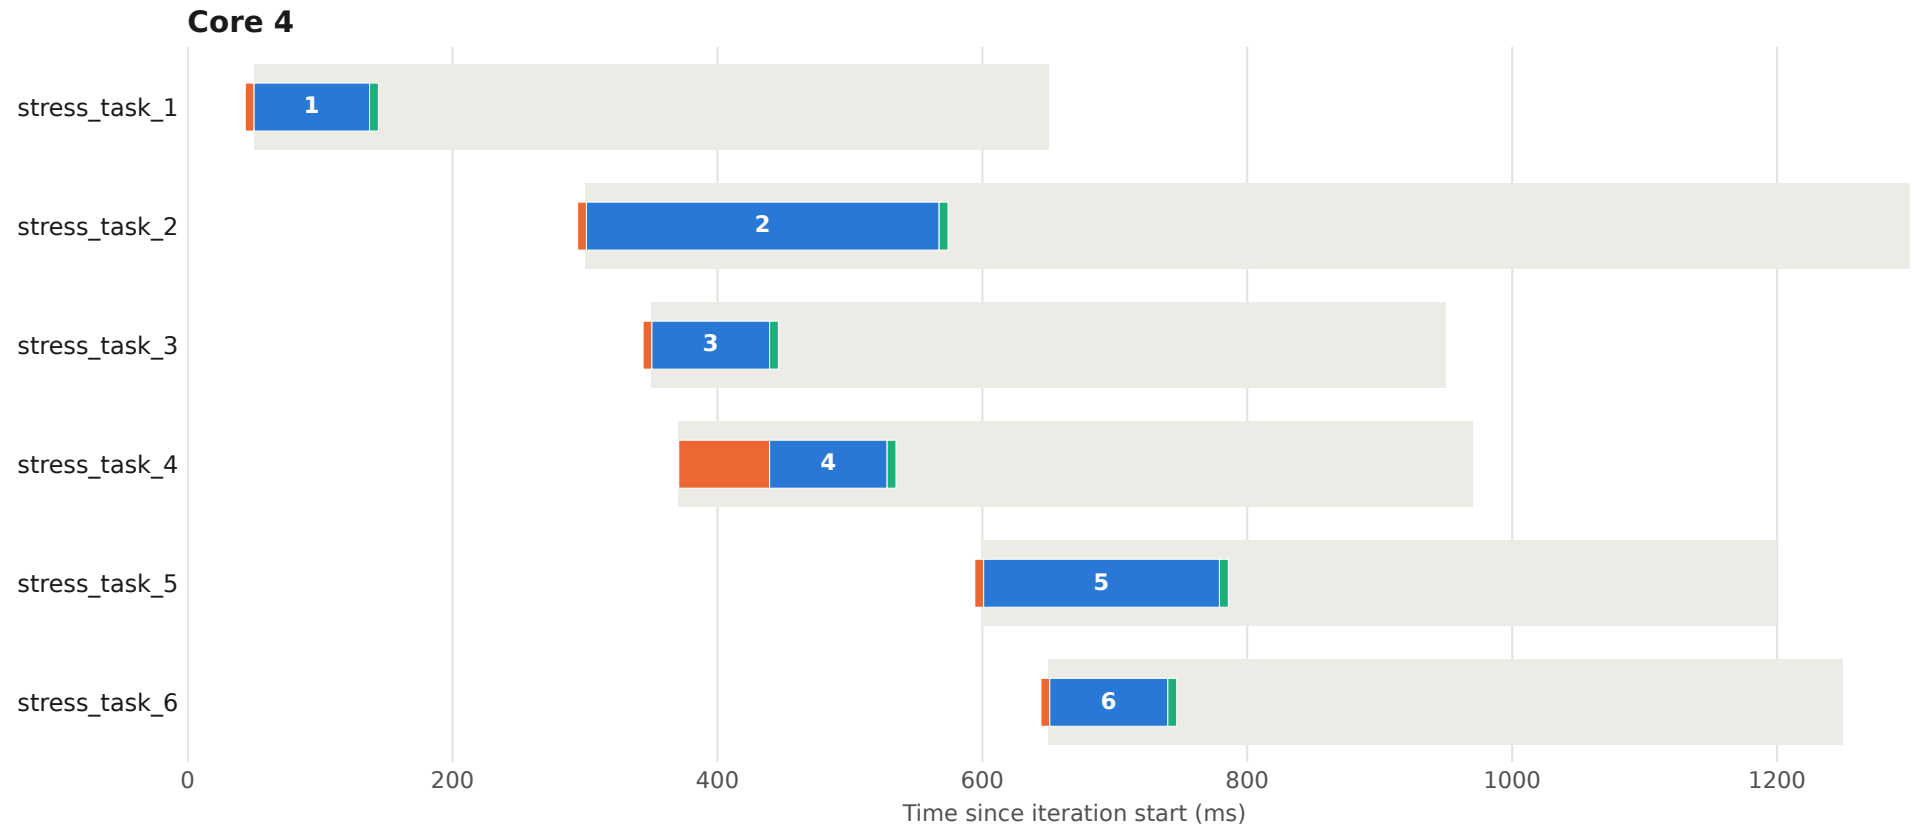


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 36 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

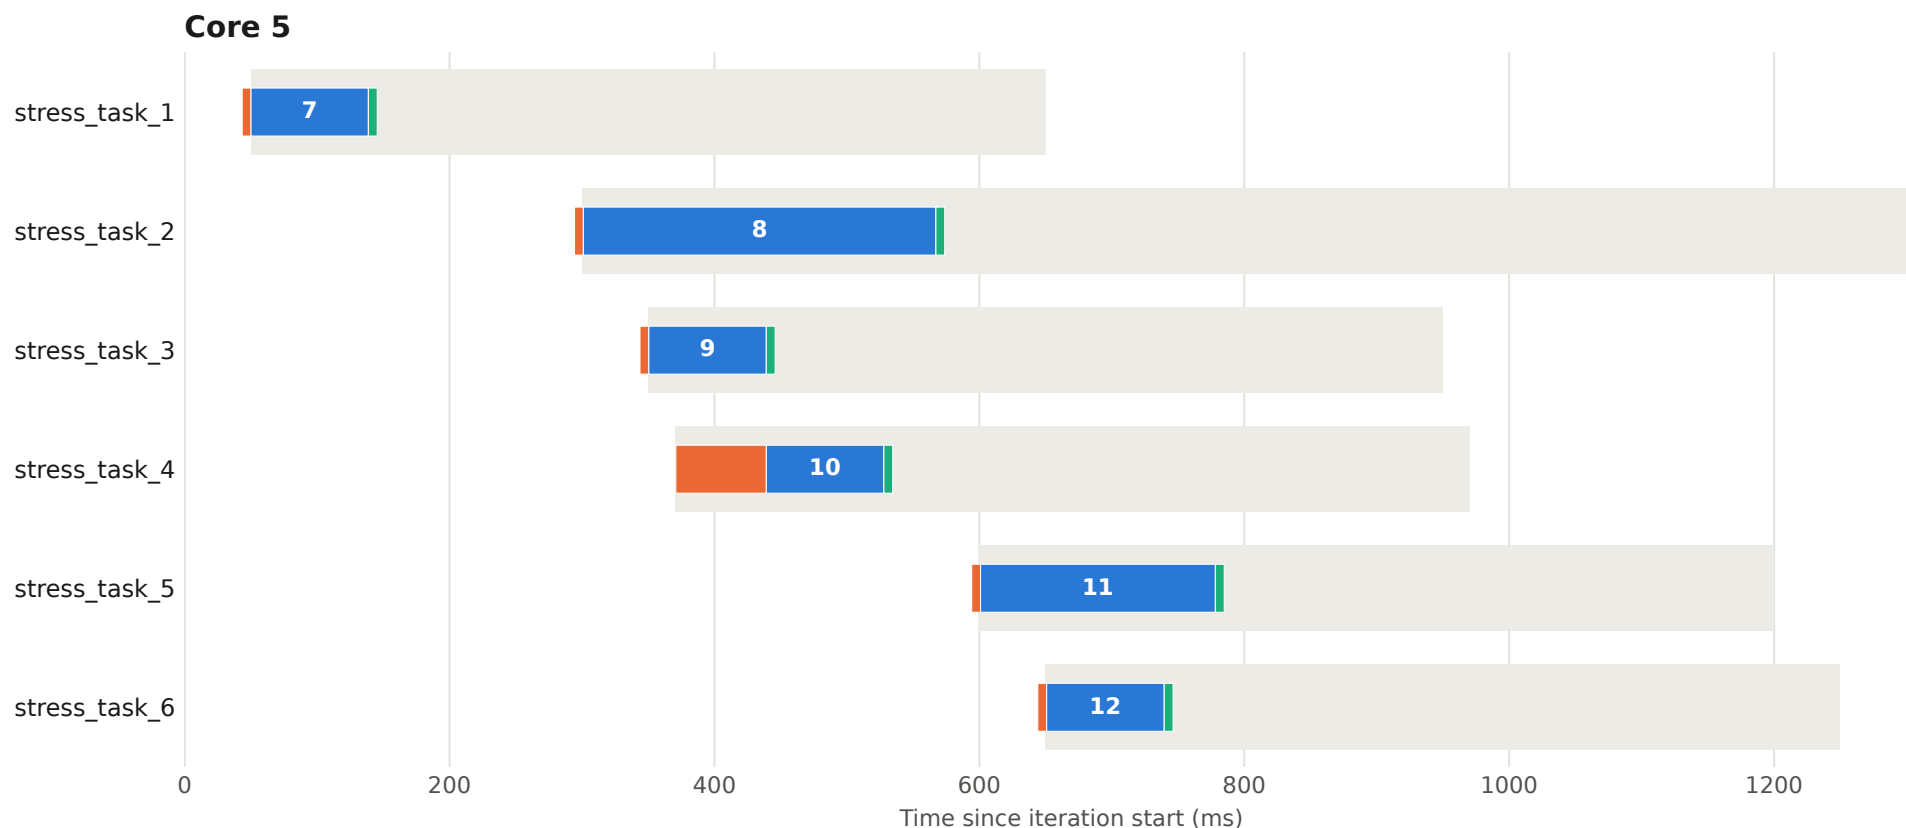


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 36 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

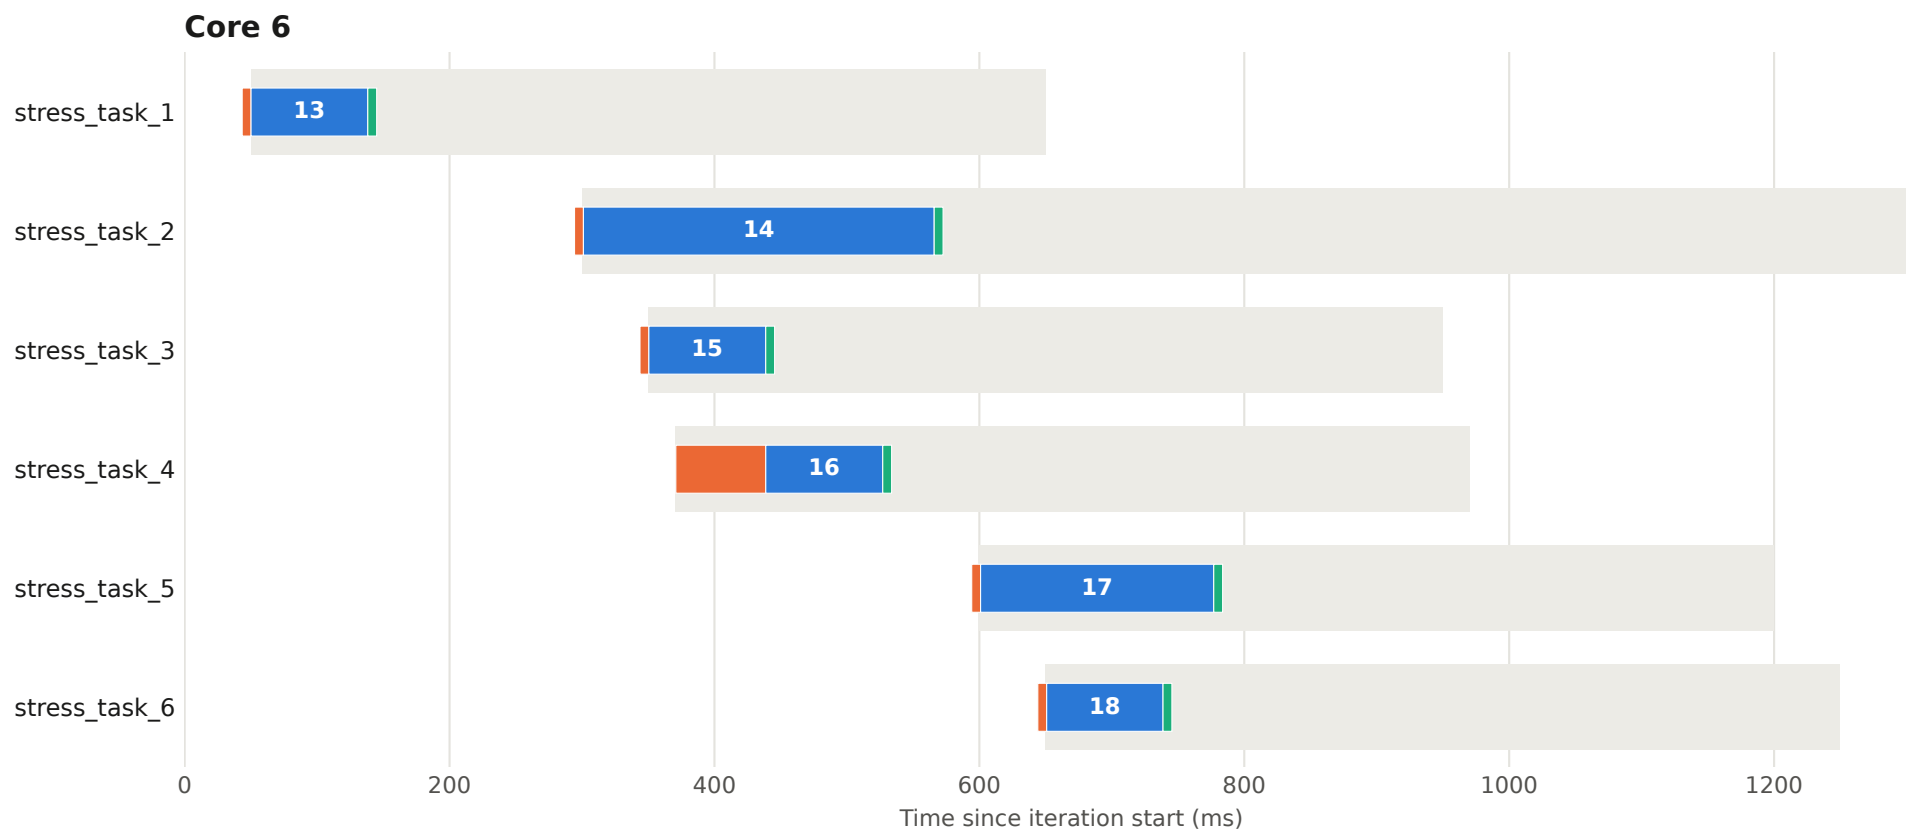


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 36 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

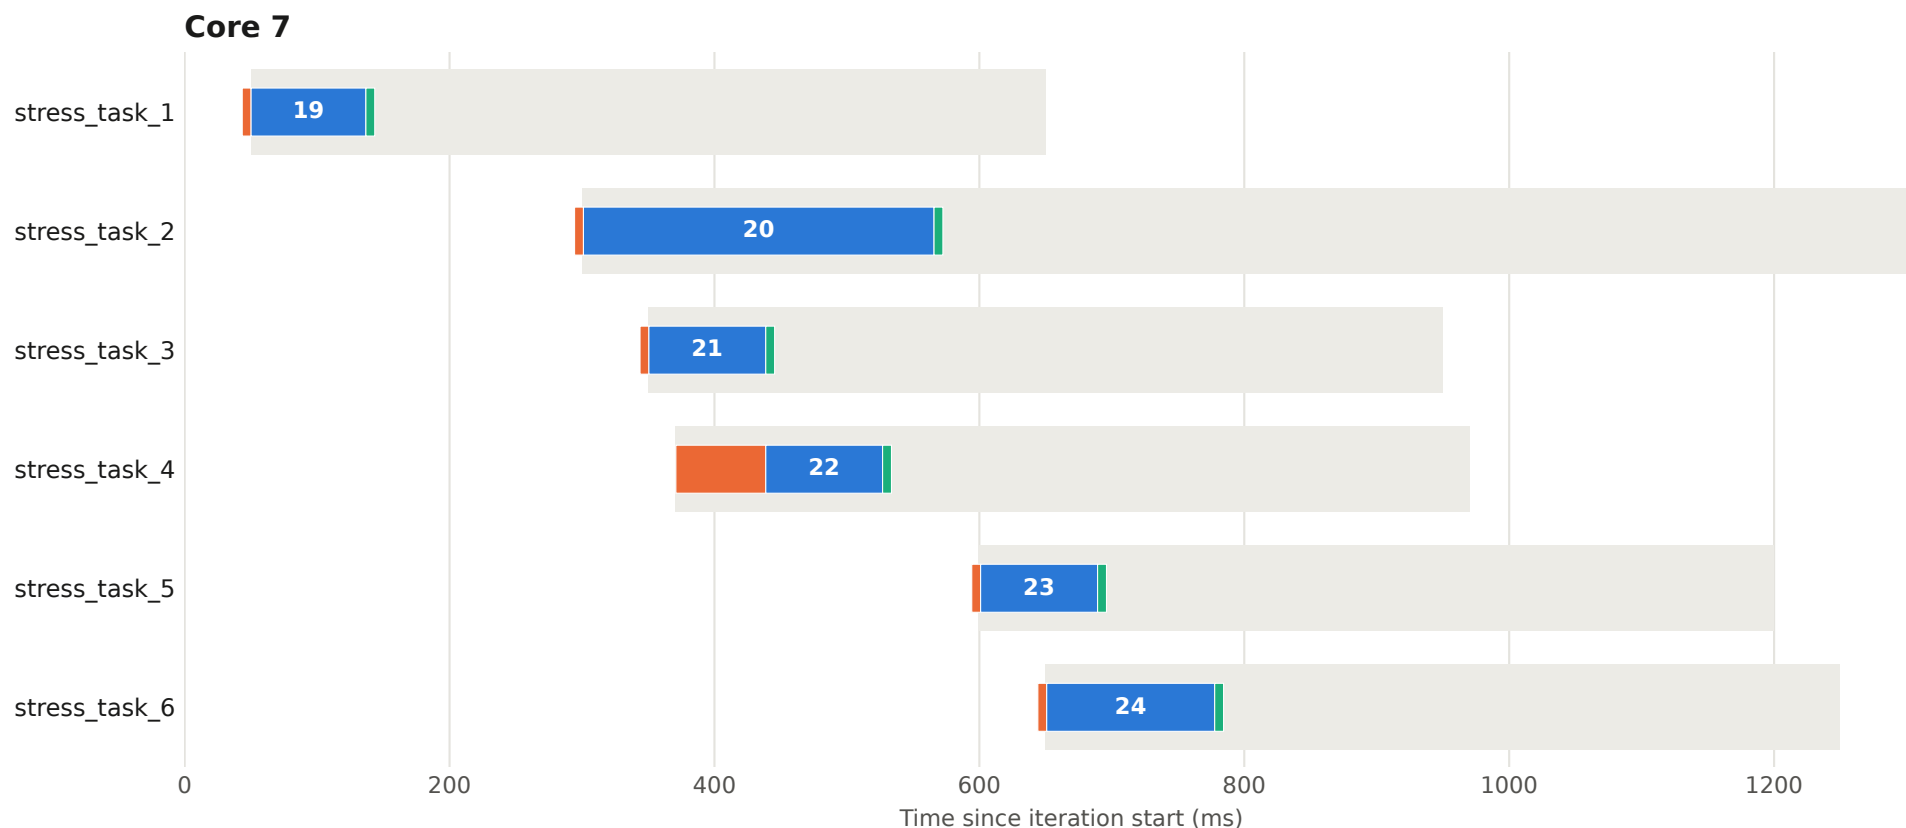


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 37 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

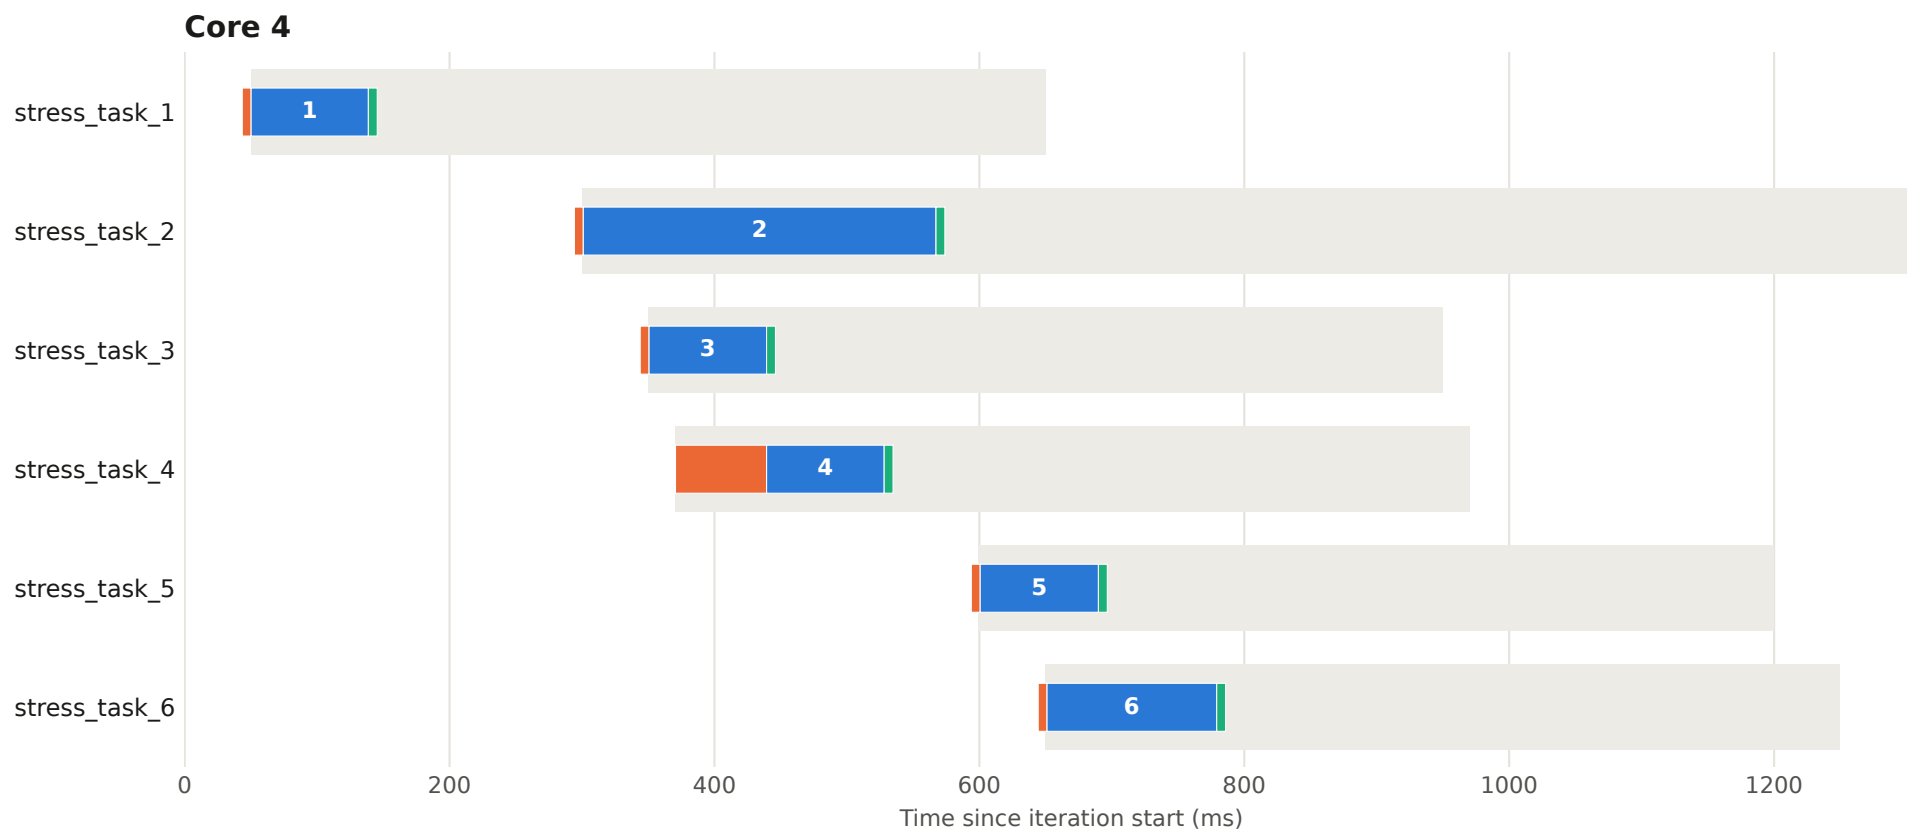


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 37 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

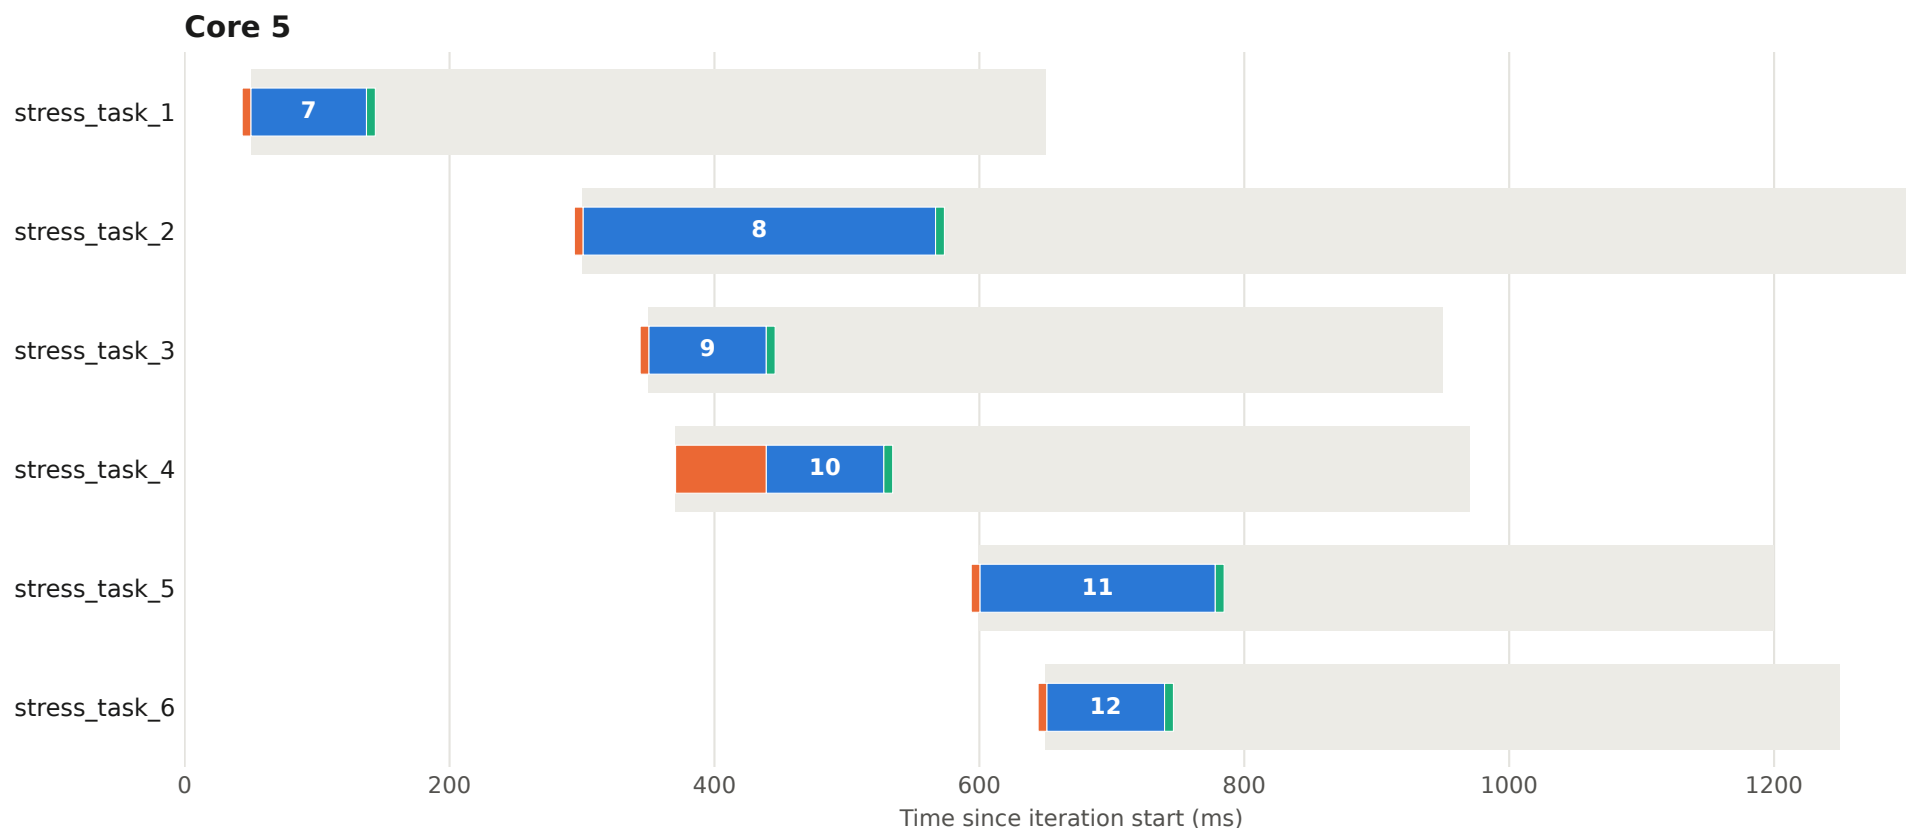


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 37 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

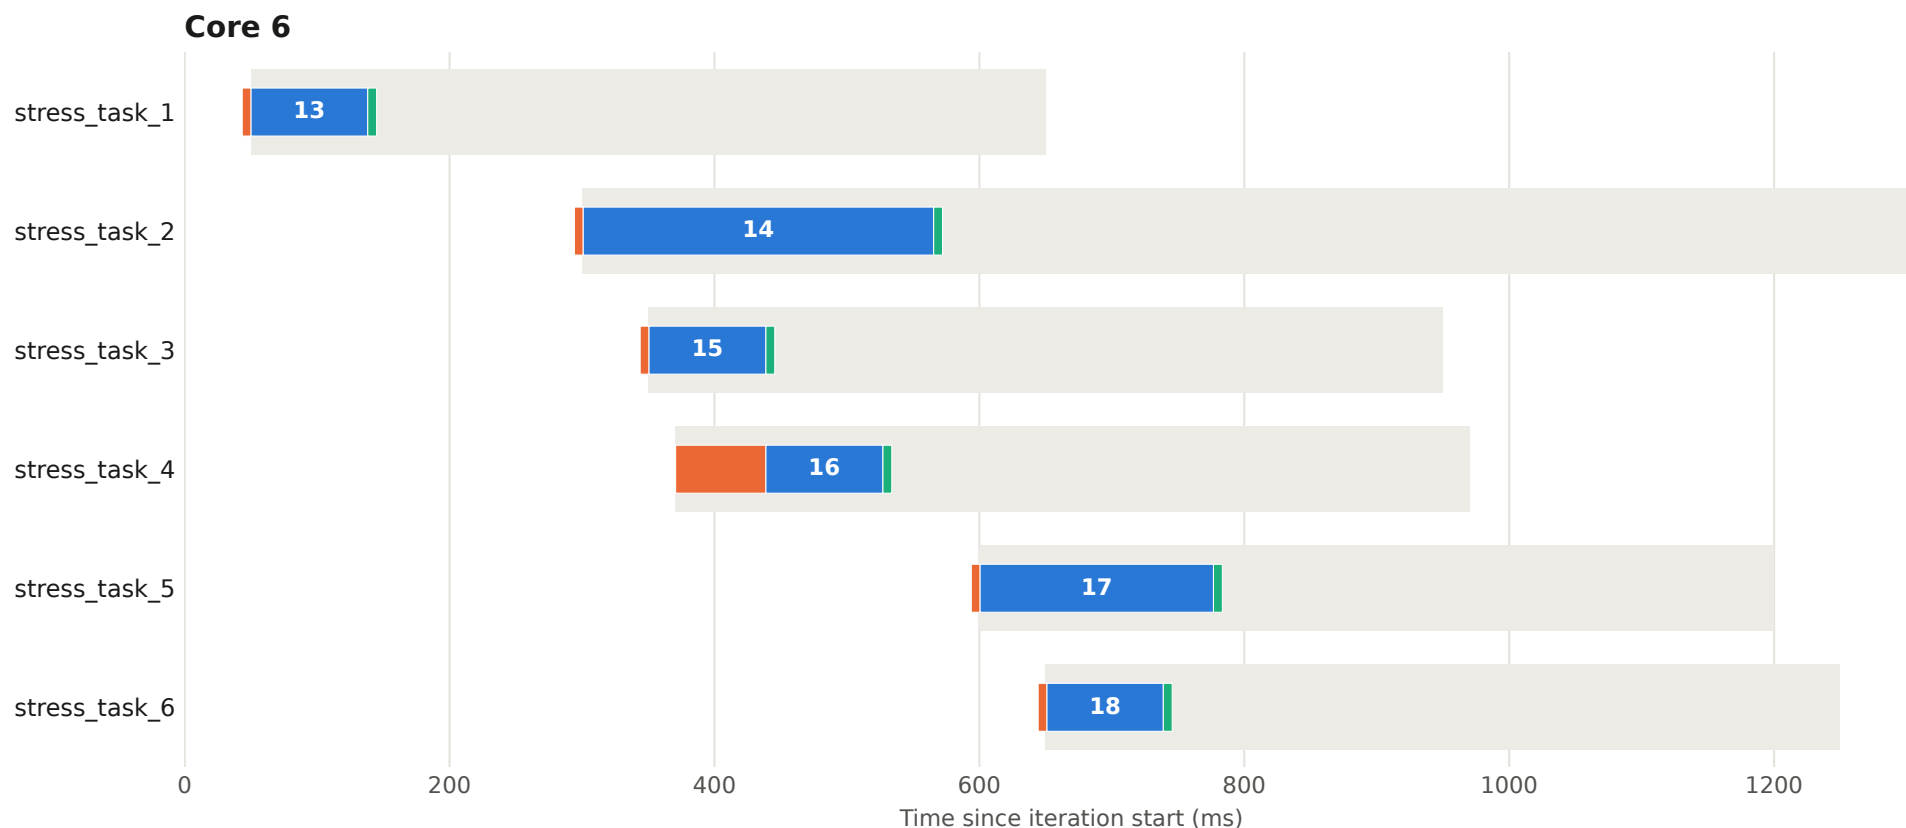


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 37 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

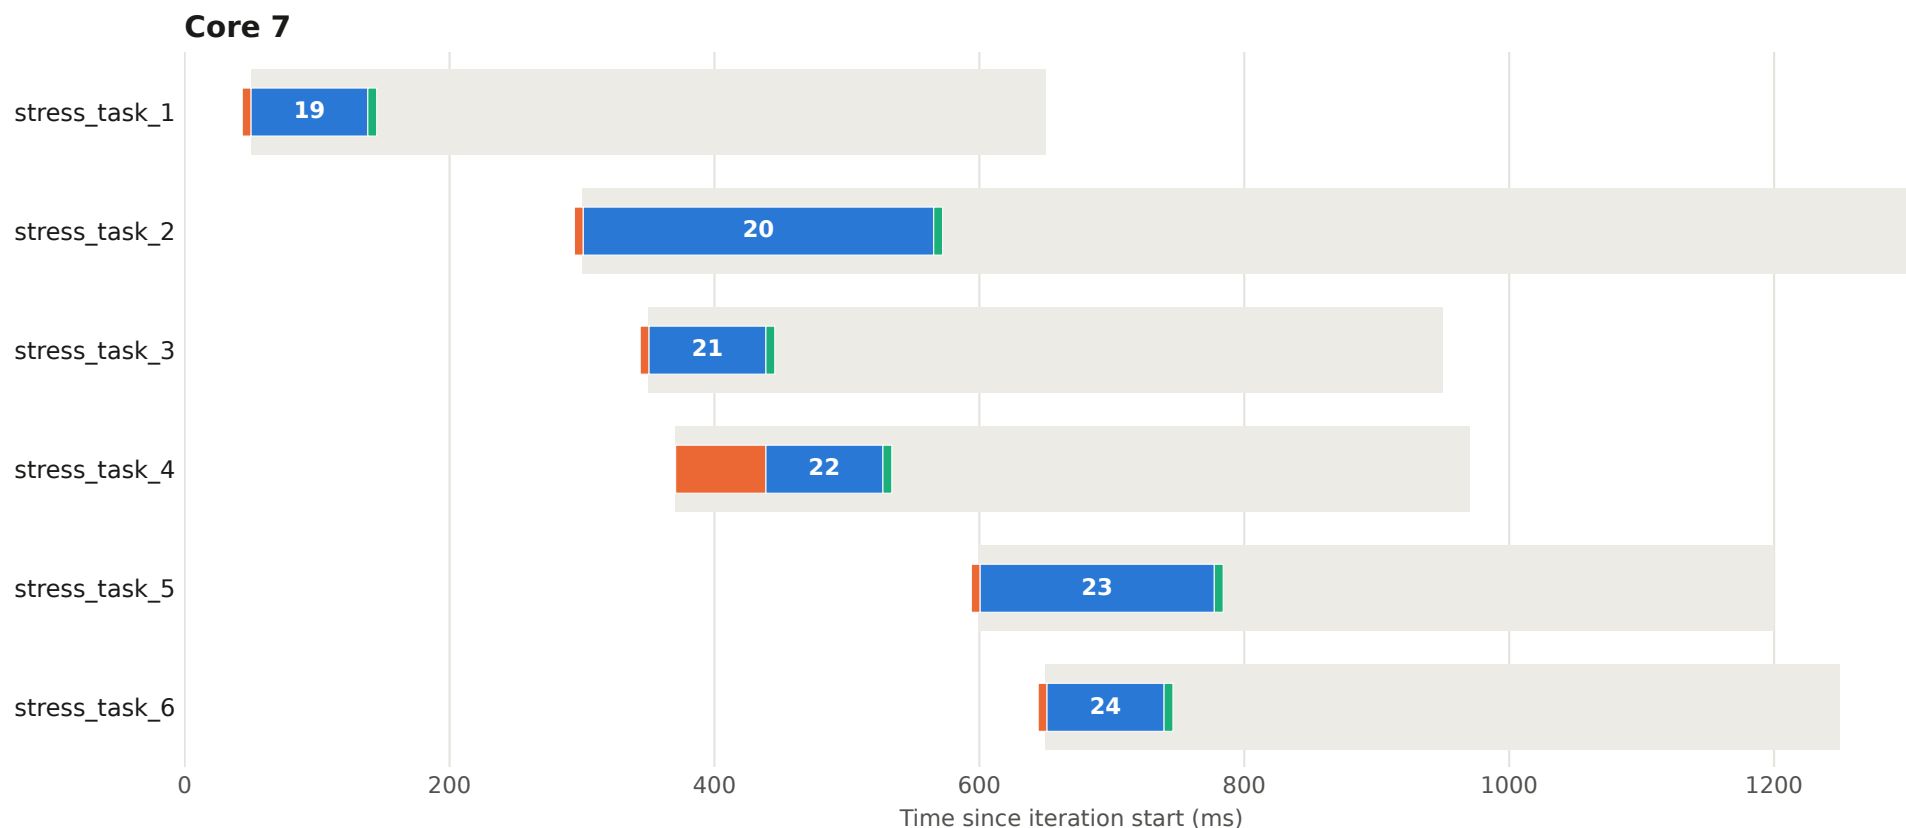


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 38 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

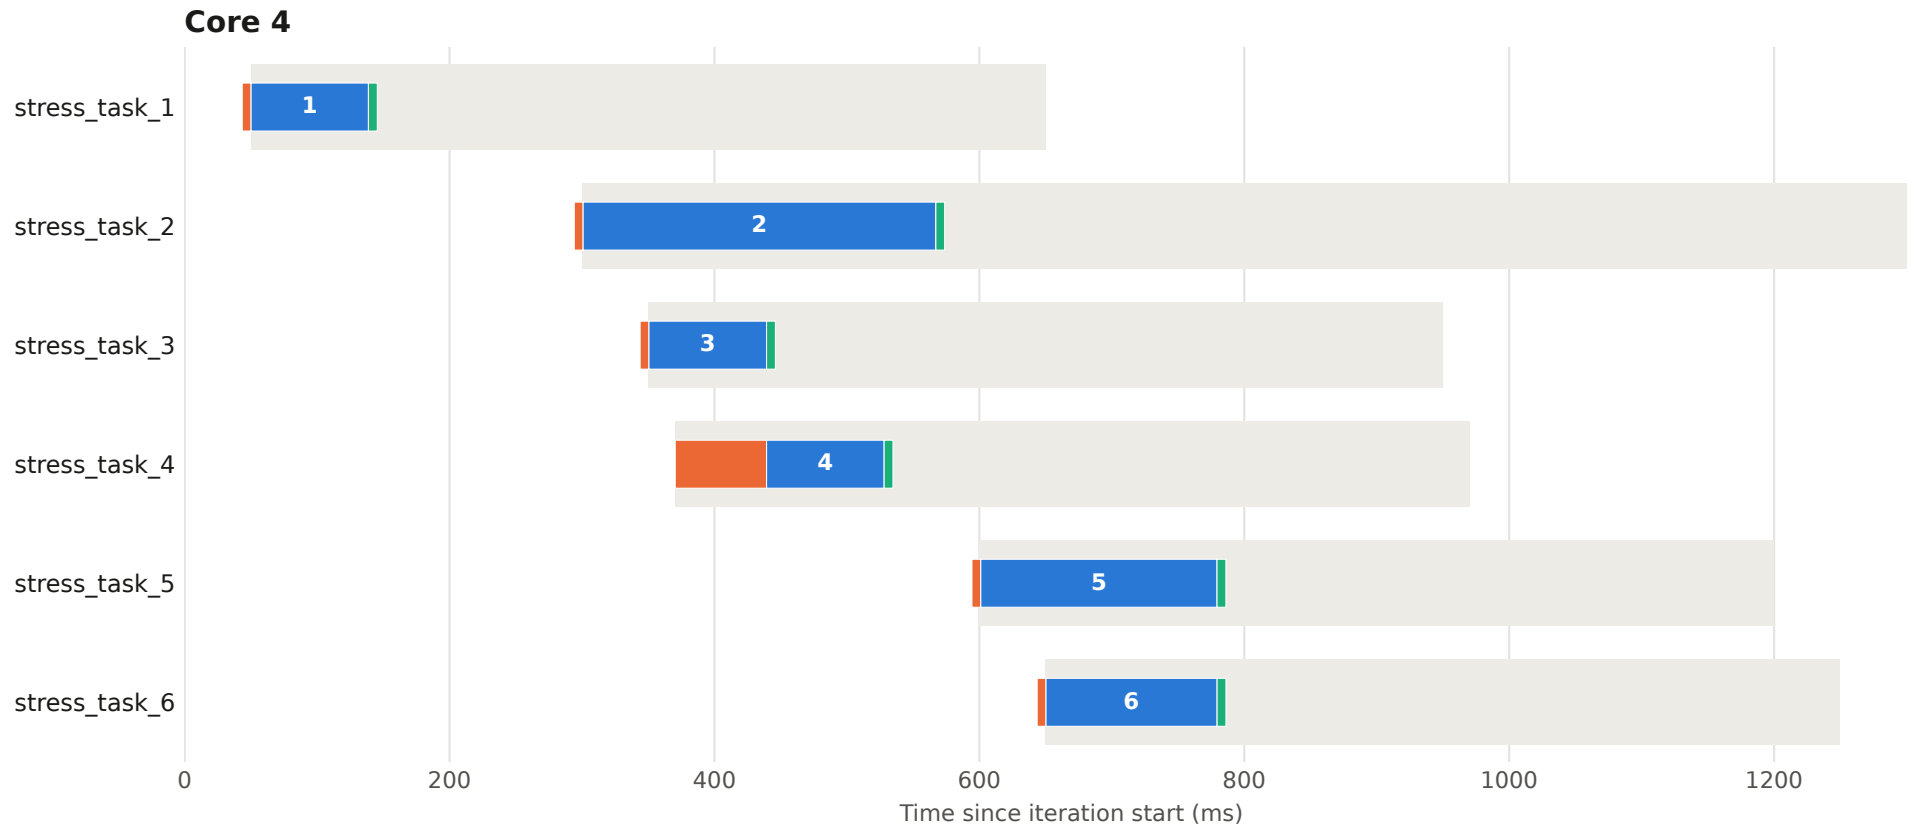


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 38 - core 5

One chart per core; each bar is one task call.


- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

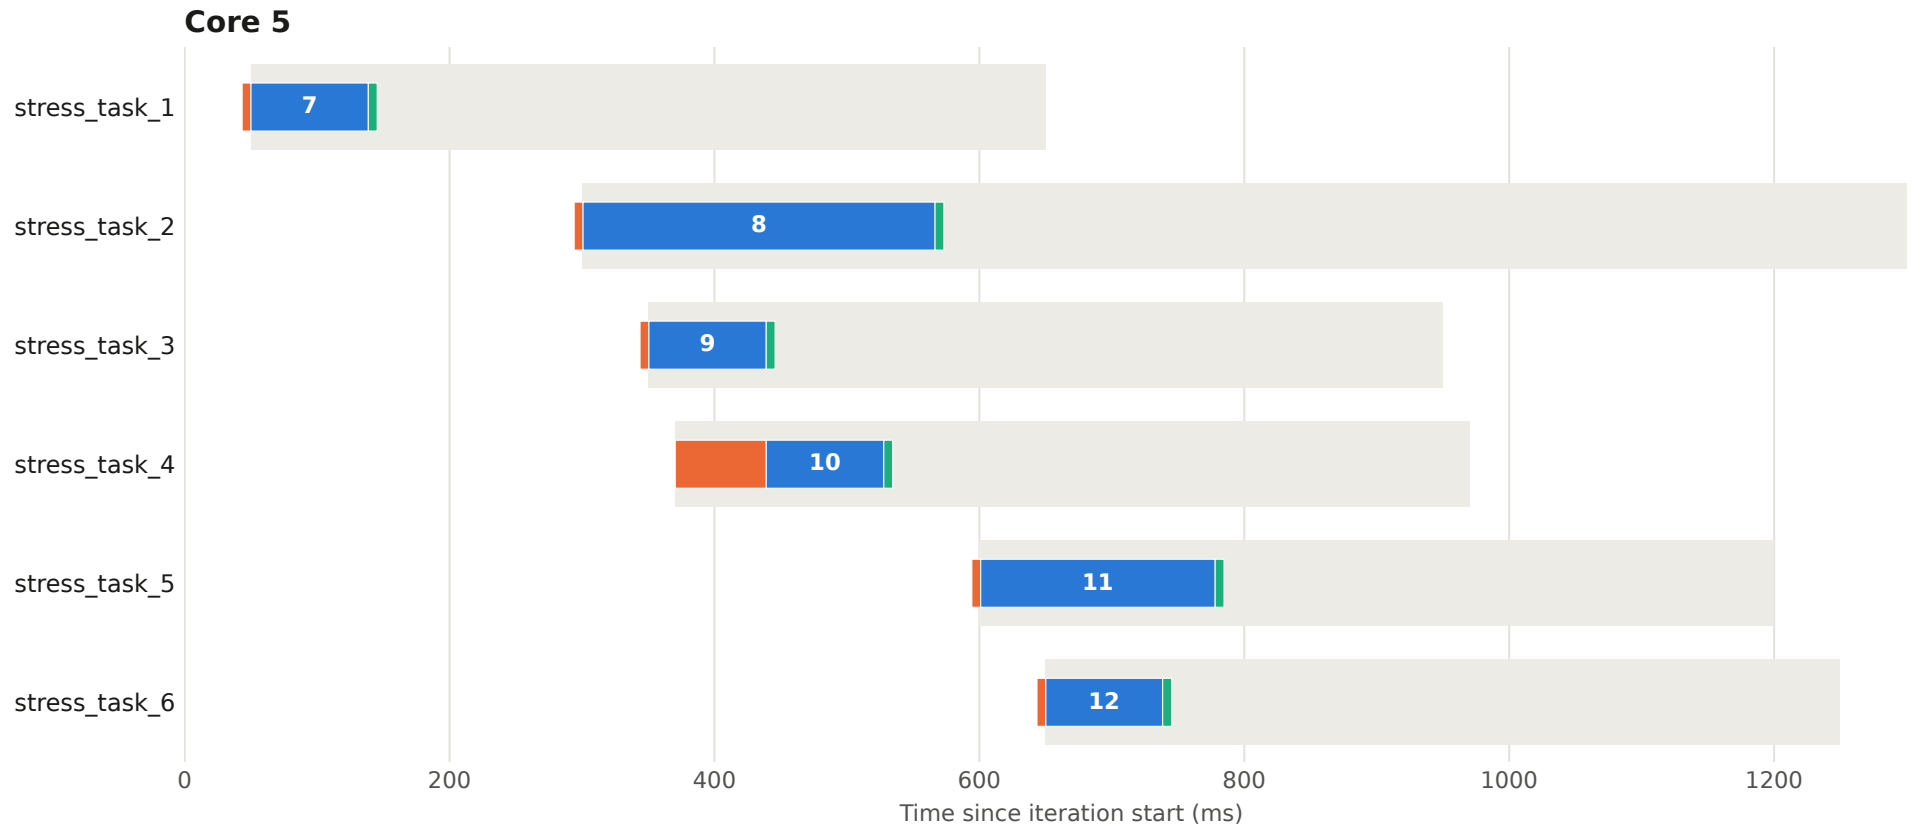

# Execution plan - iteration 38 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

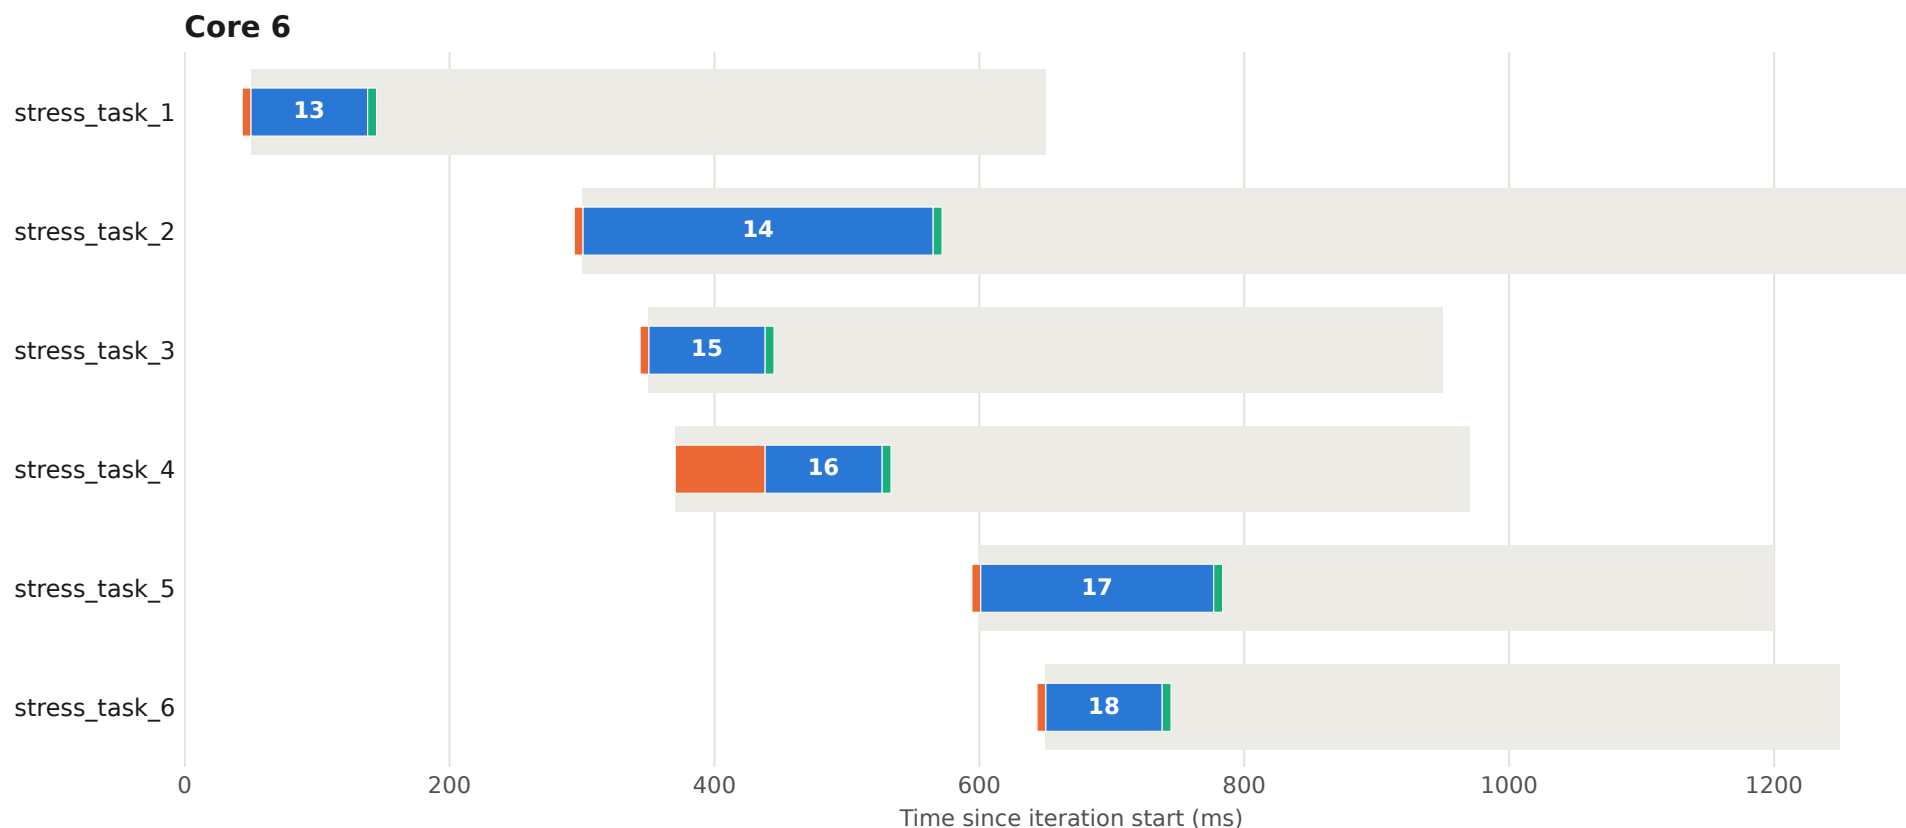


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 38 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

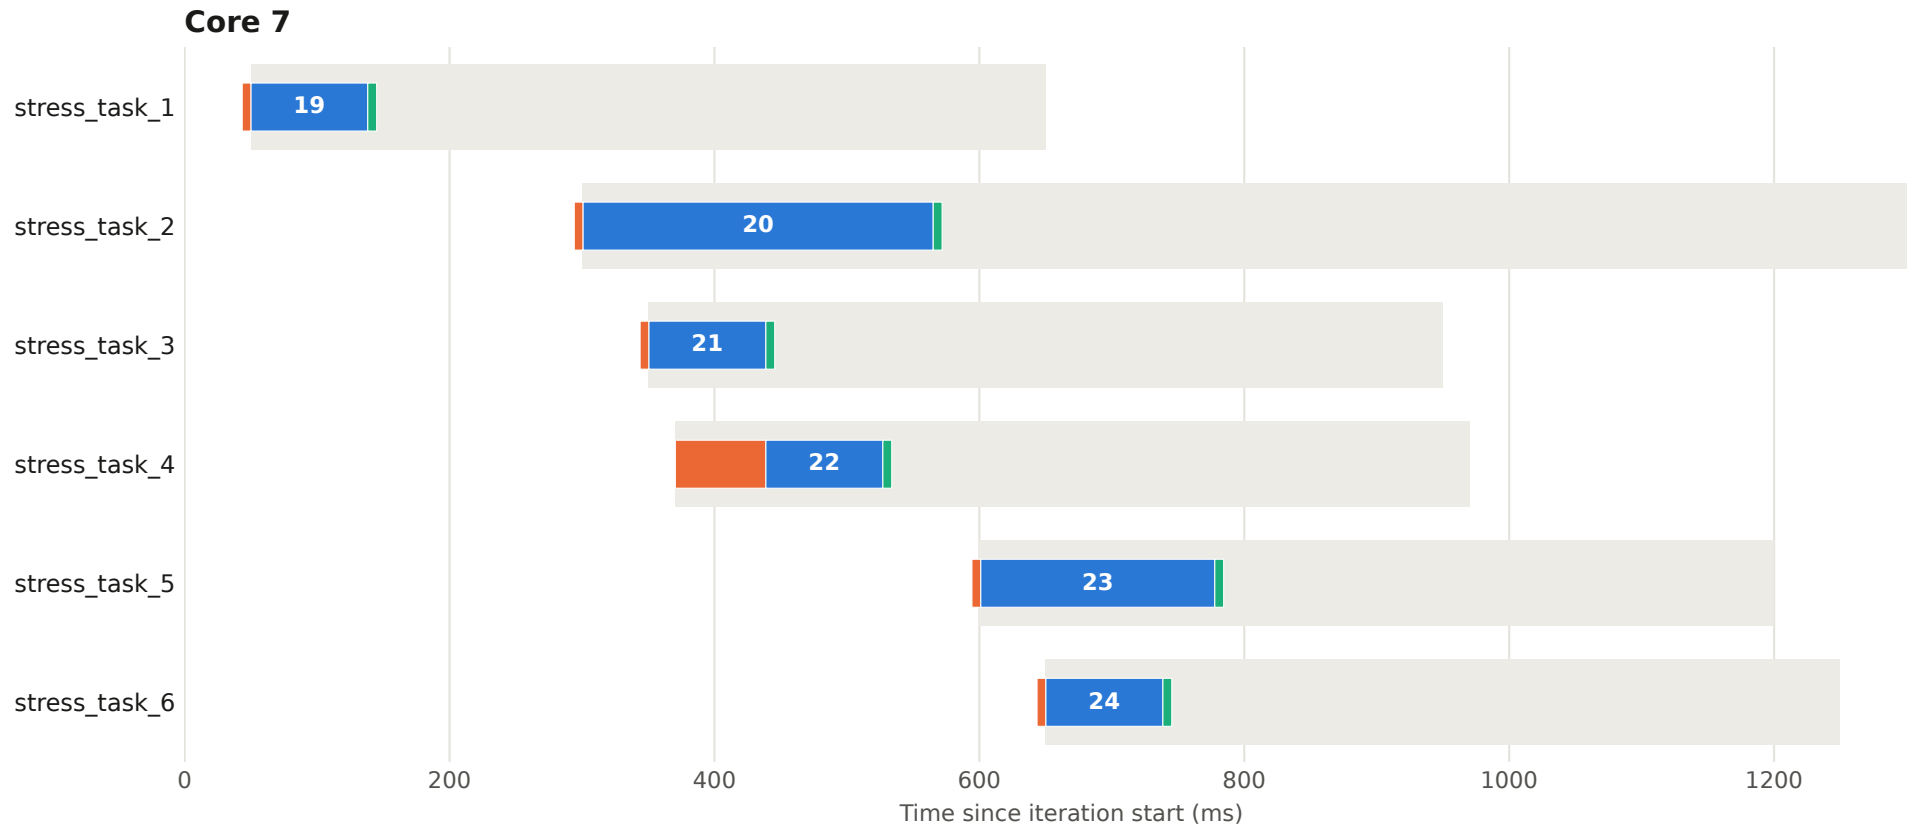


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 39 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

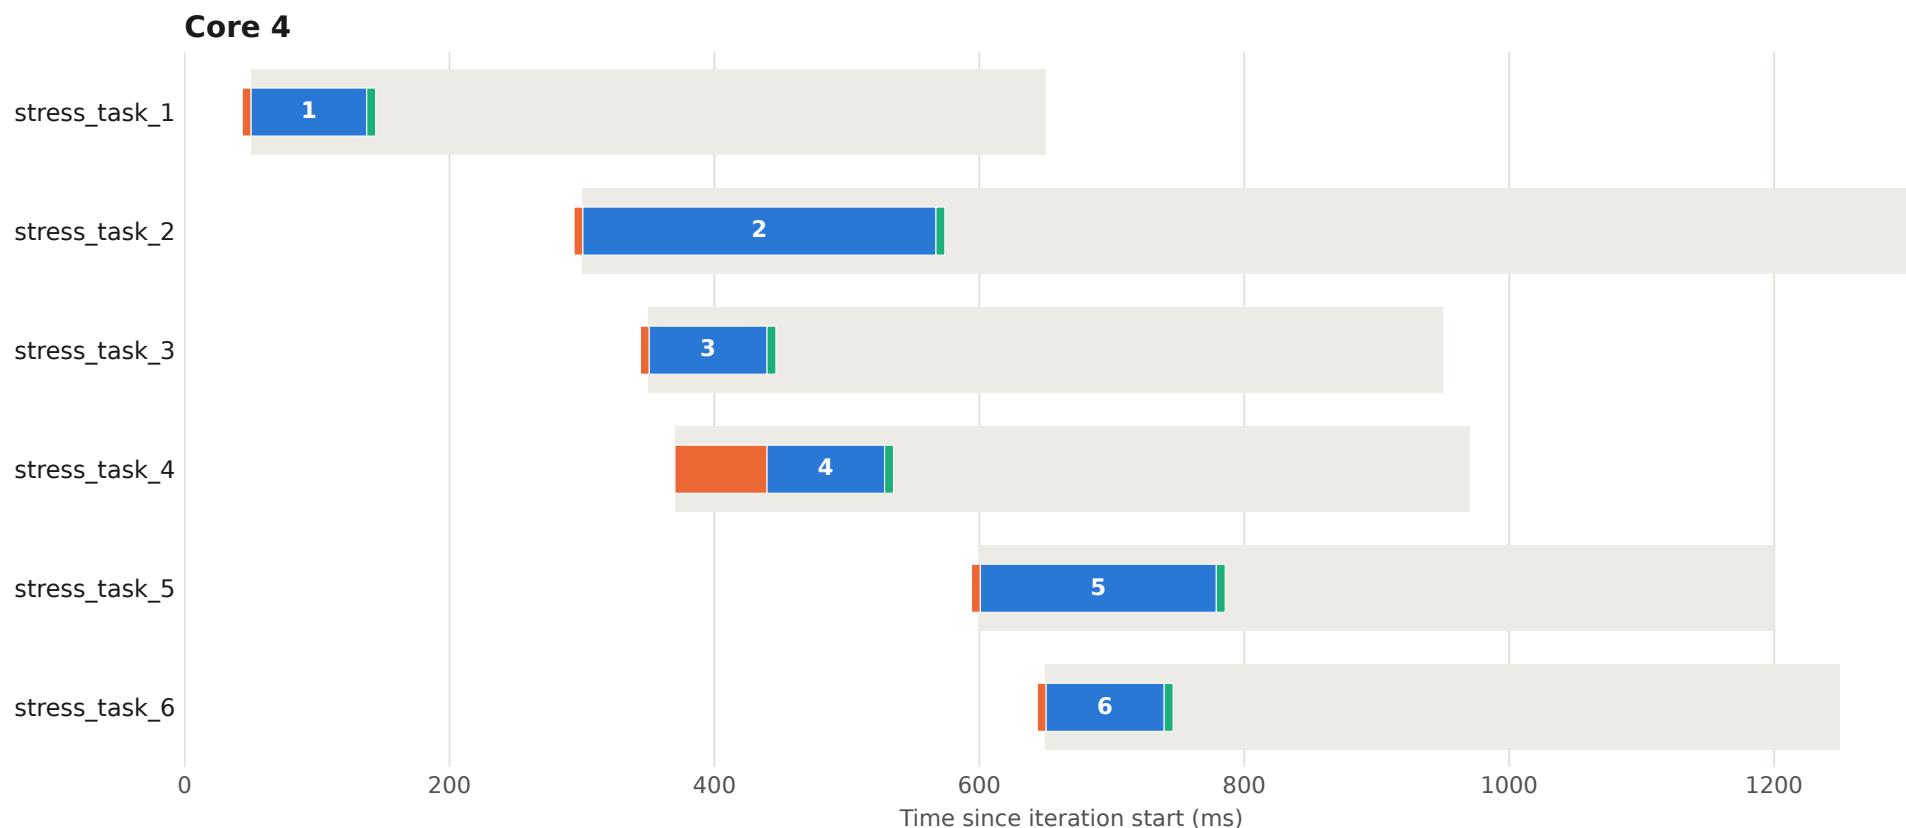


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 39 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

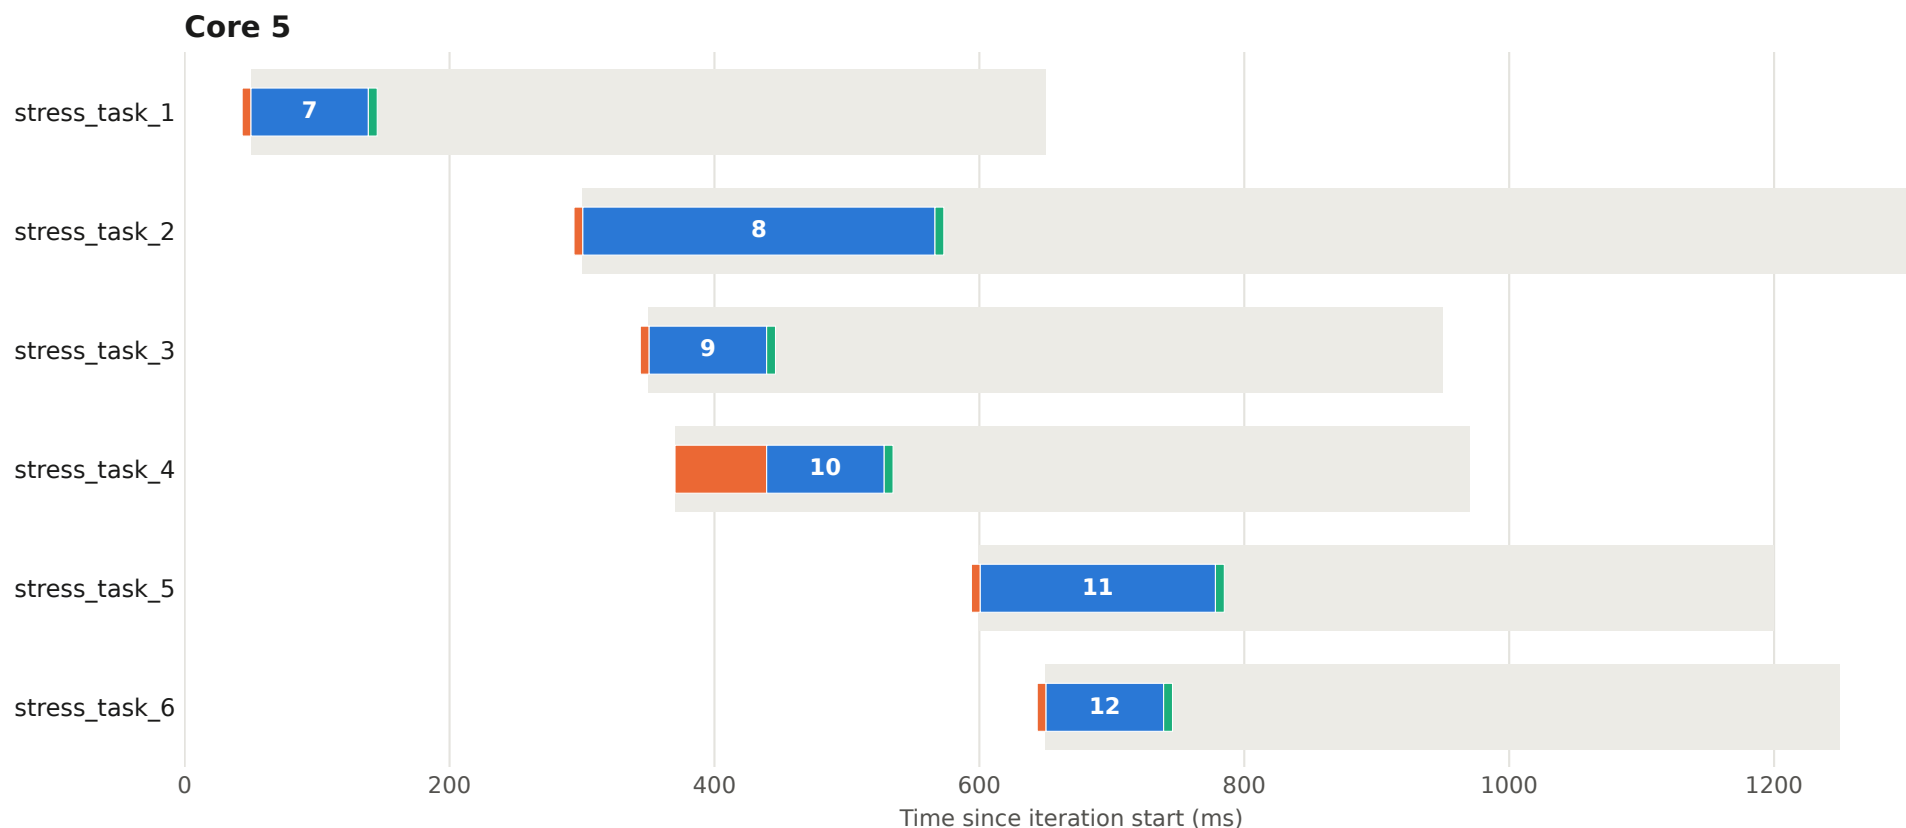


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 39 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

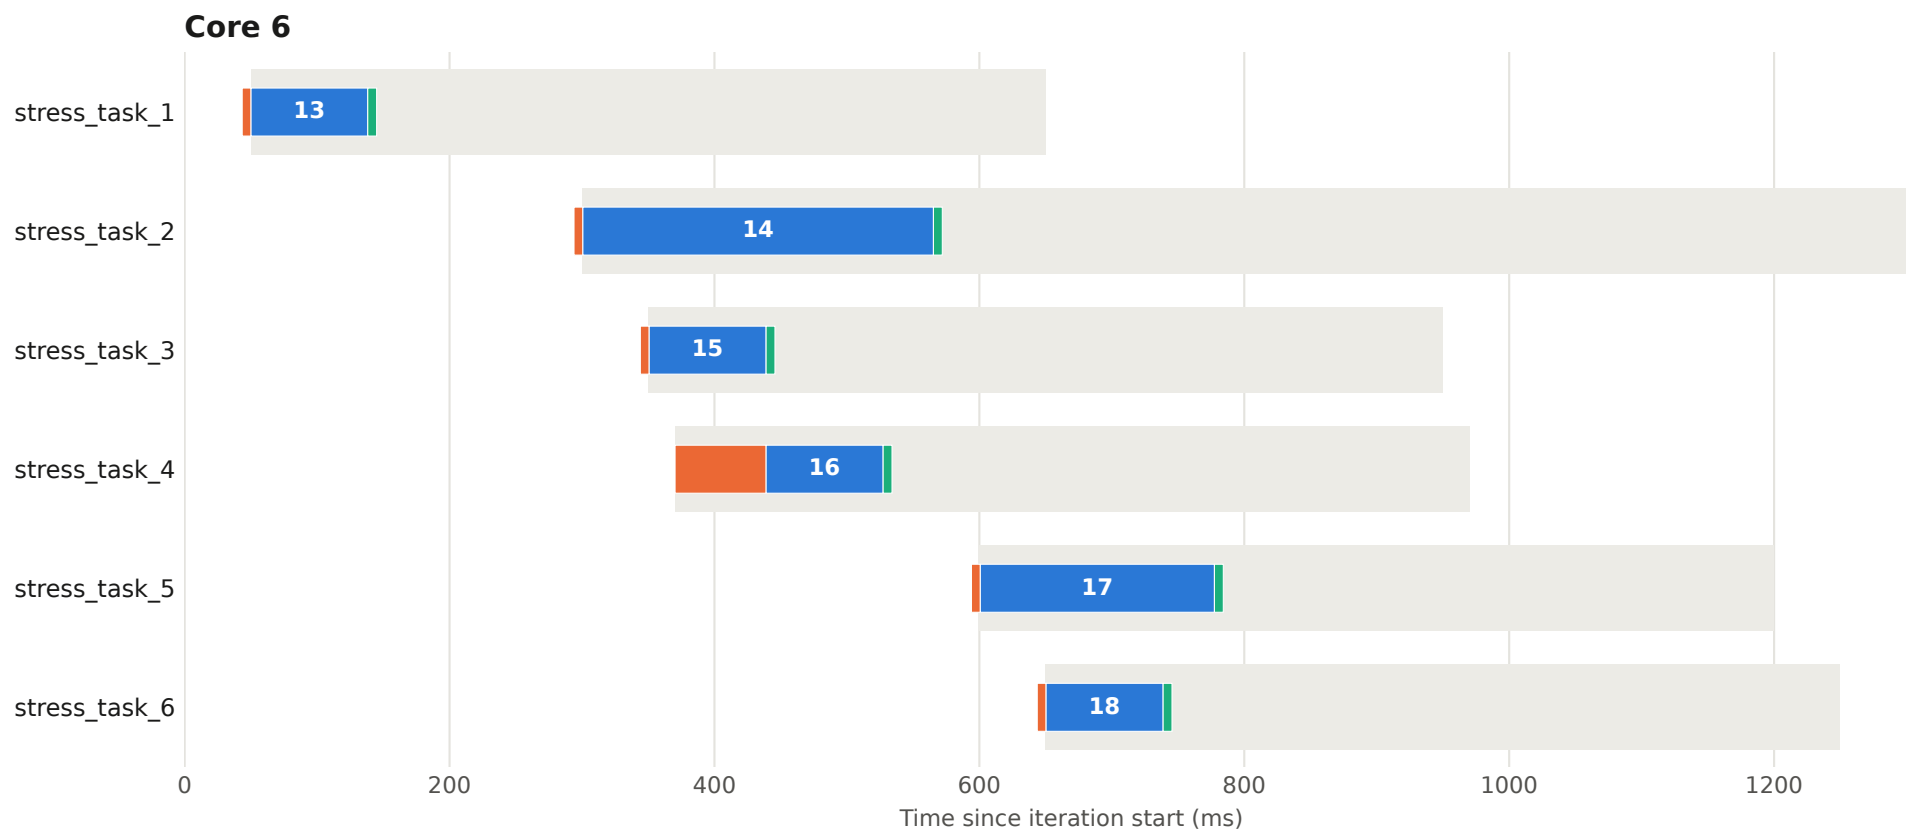


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 39 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

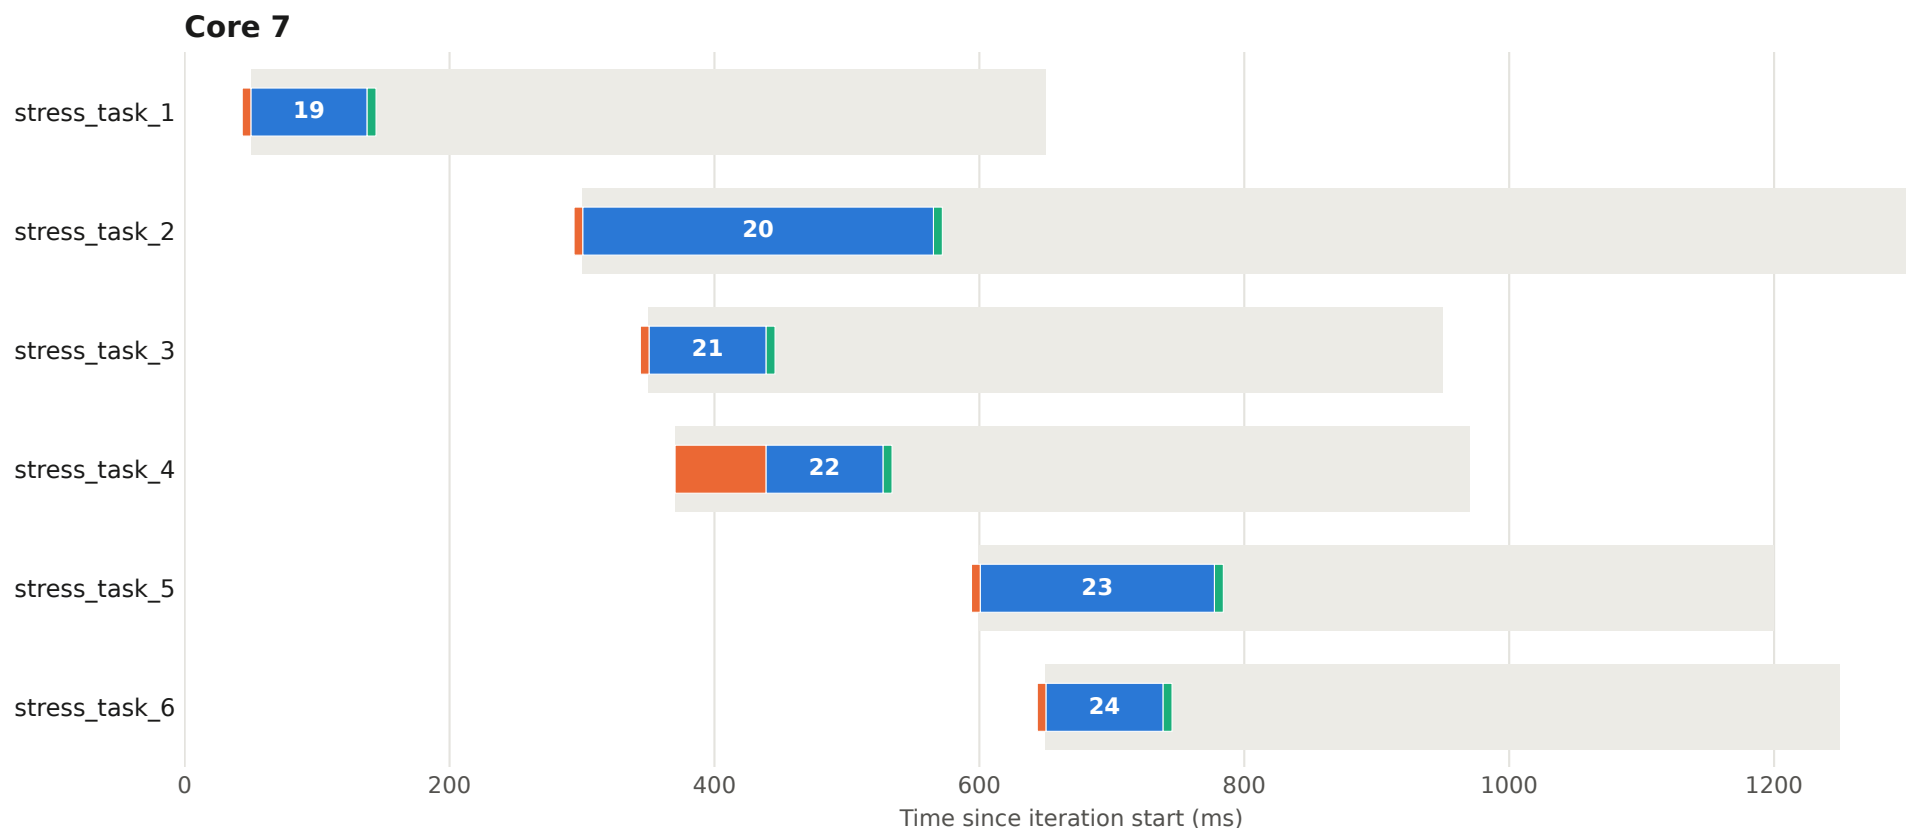


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 40 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

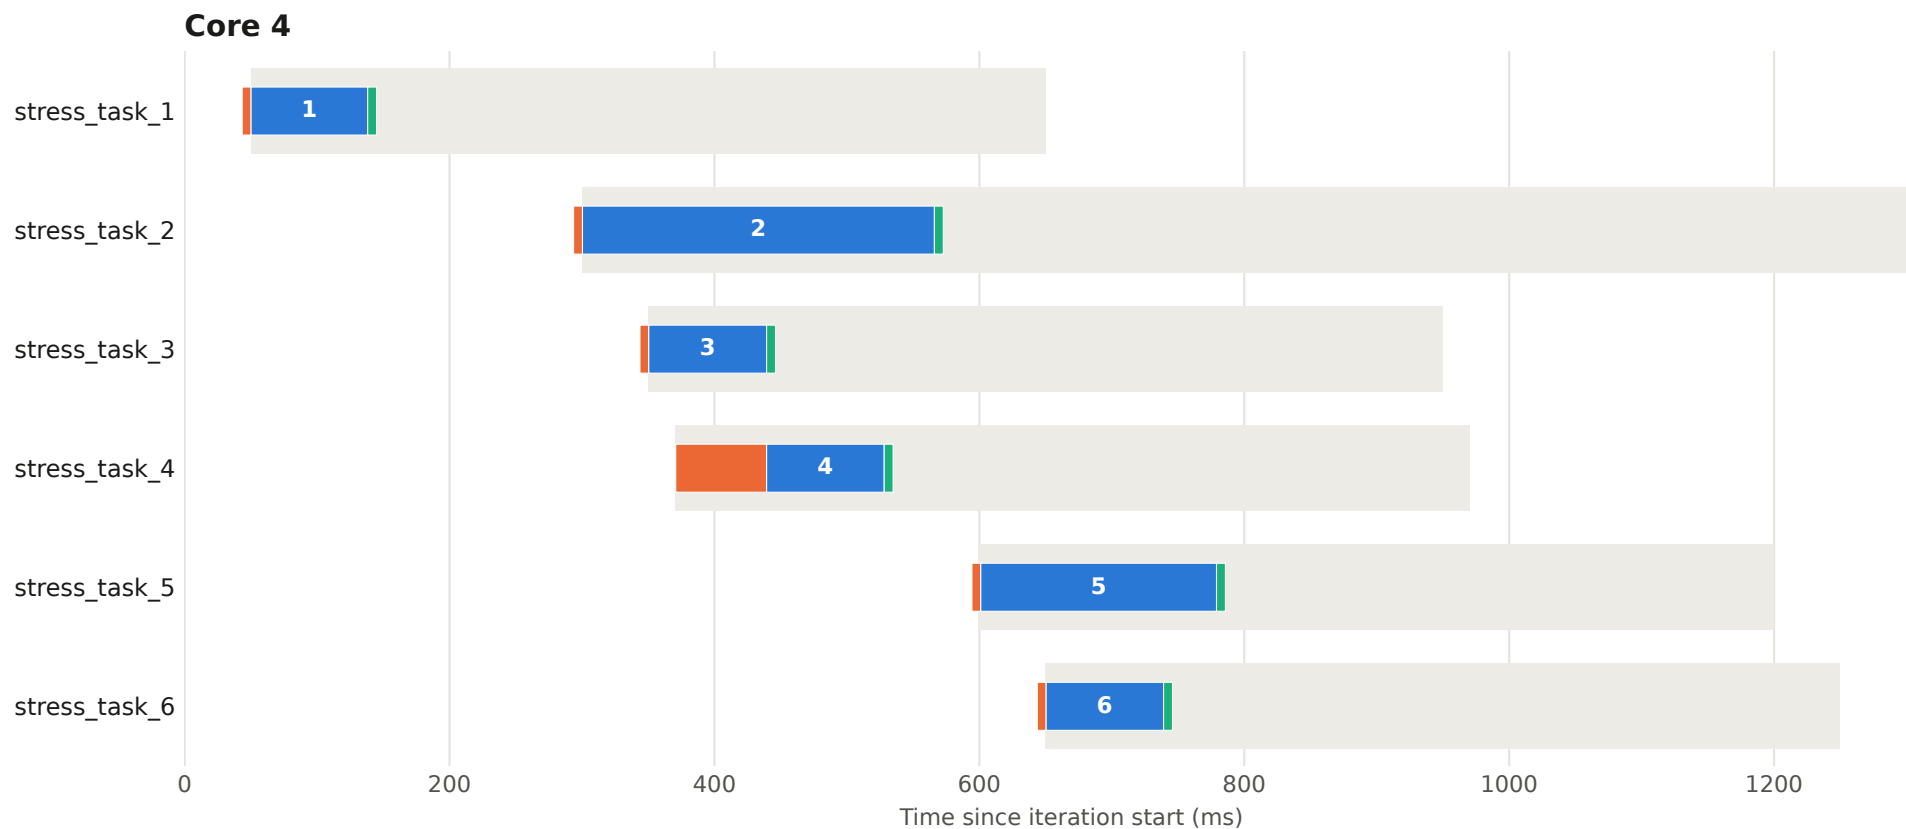


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 40 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

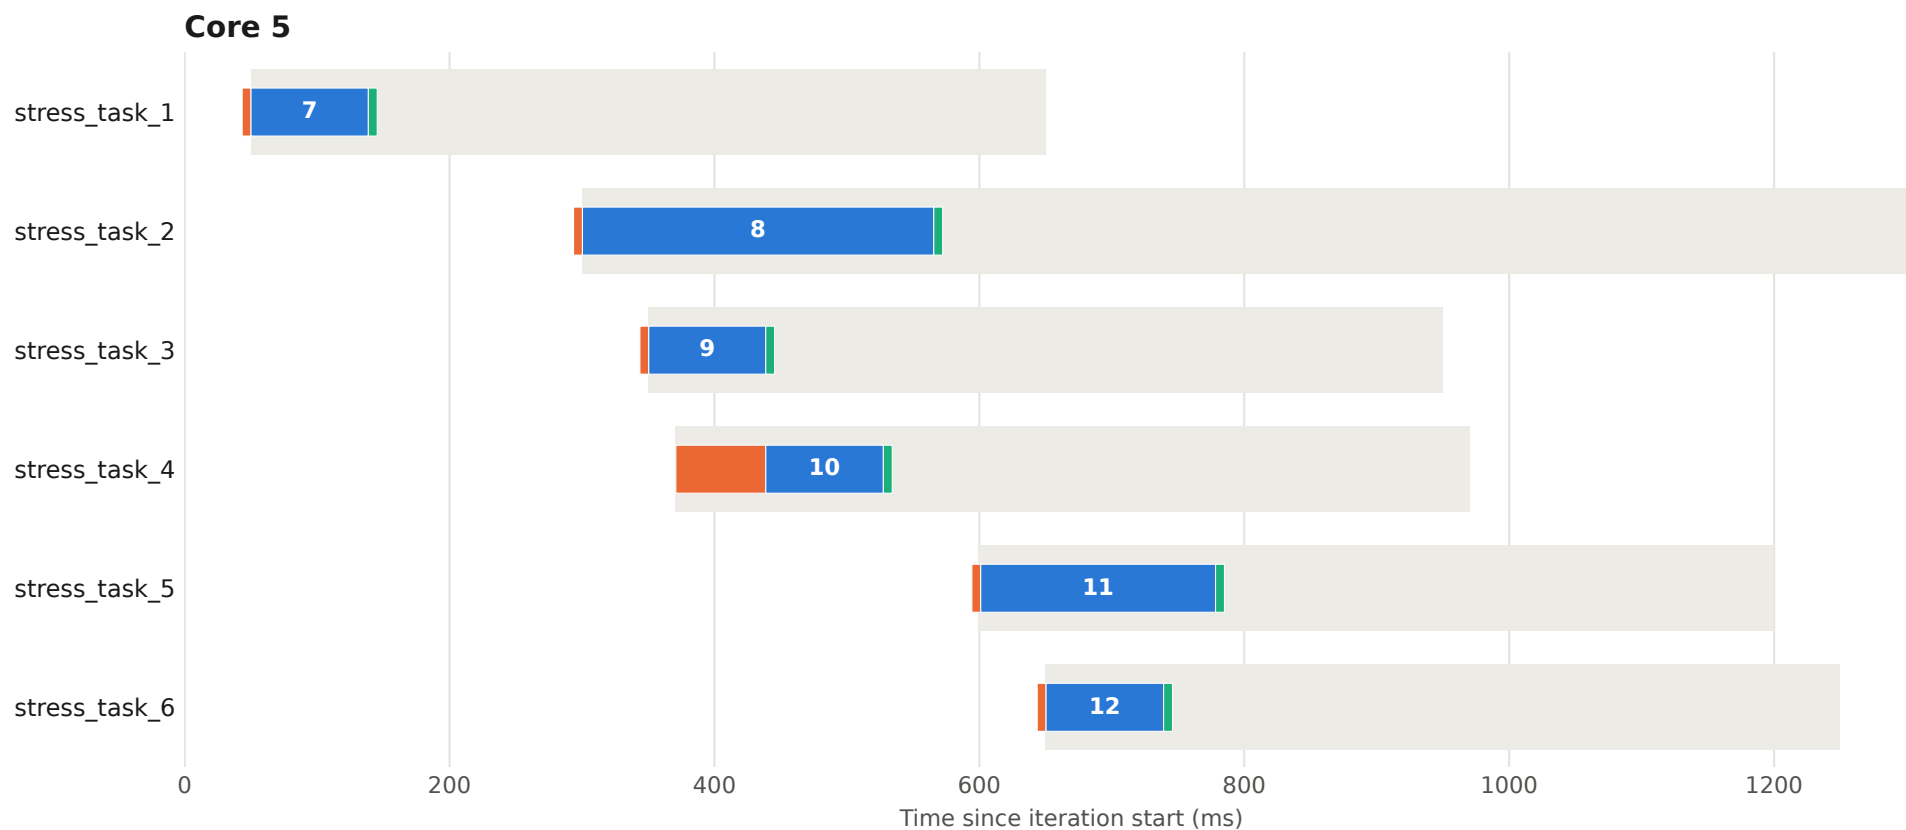


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 40 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

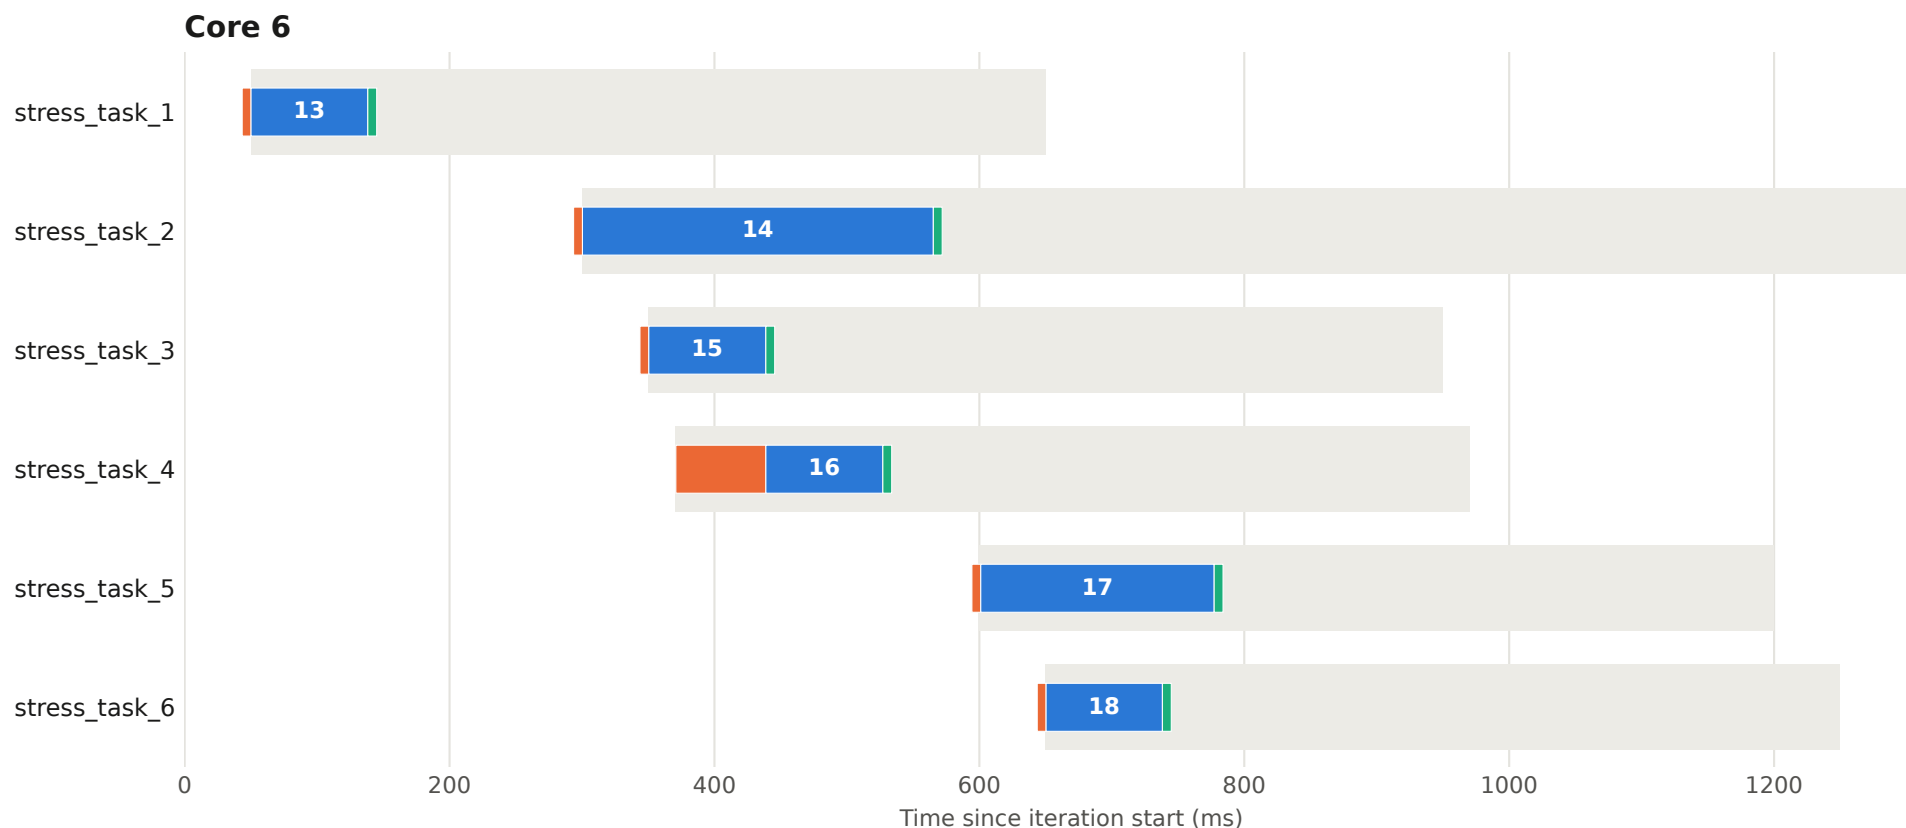


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 40 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

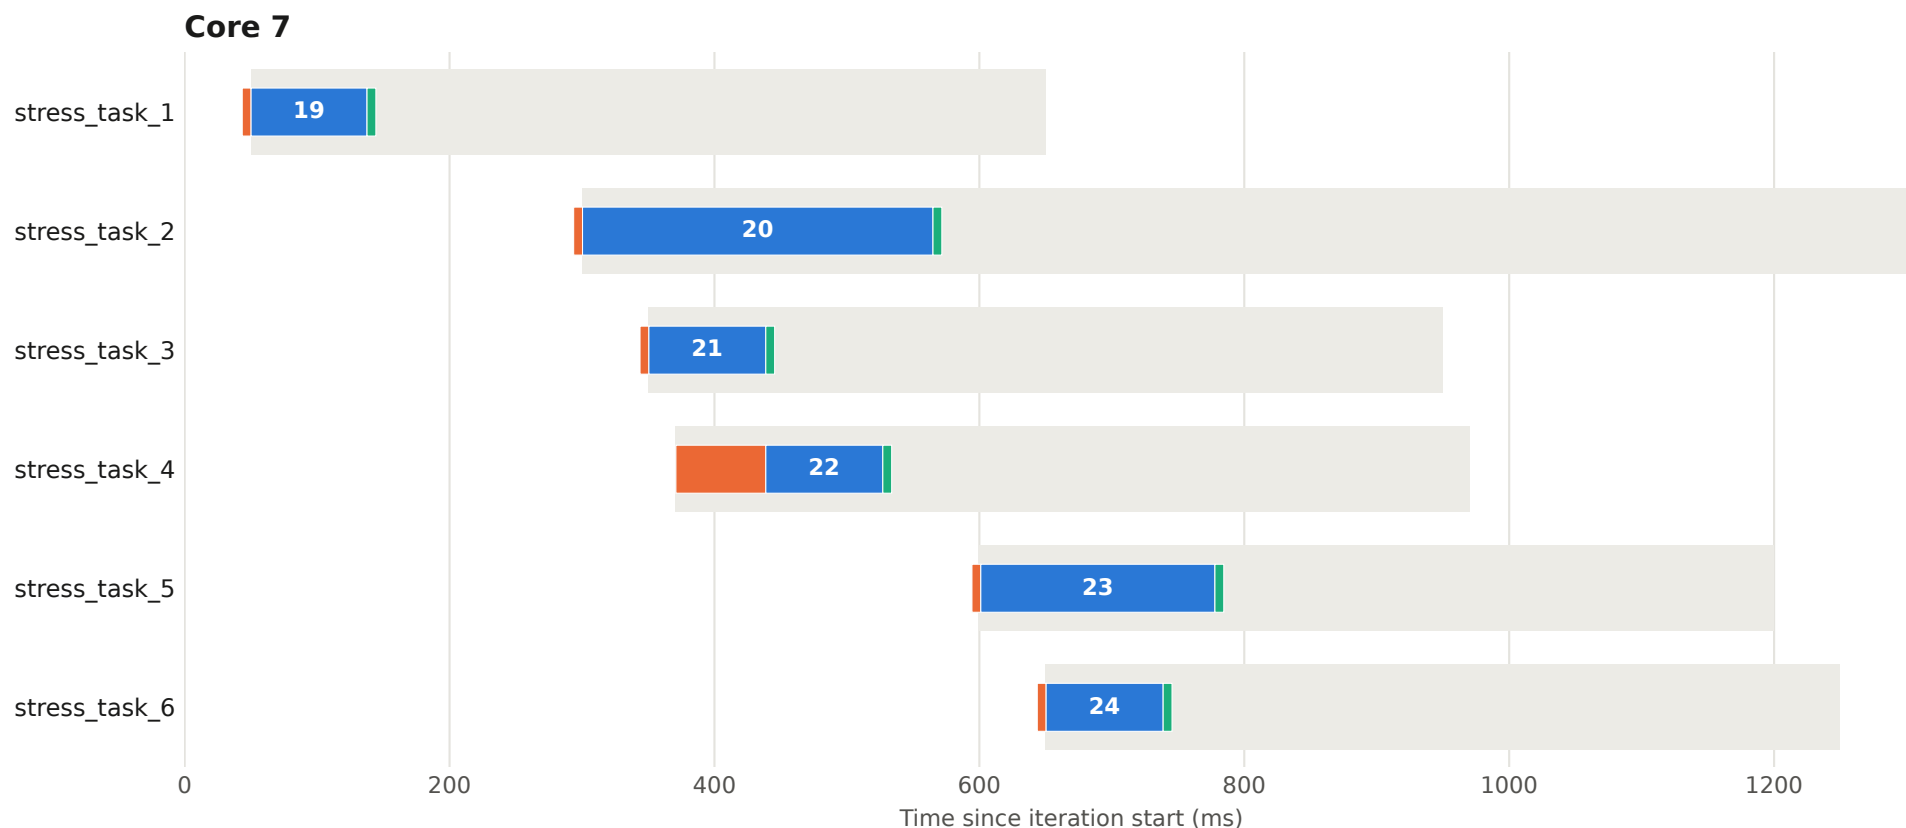


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 41 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

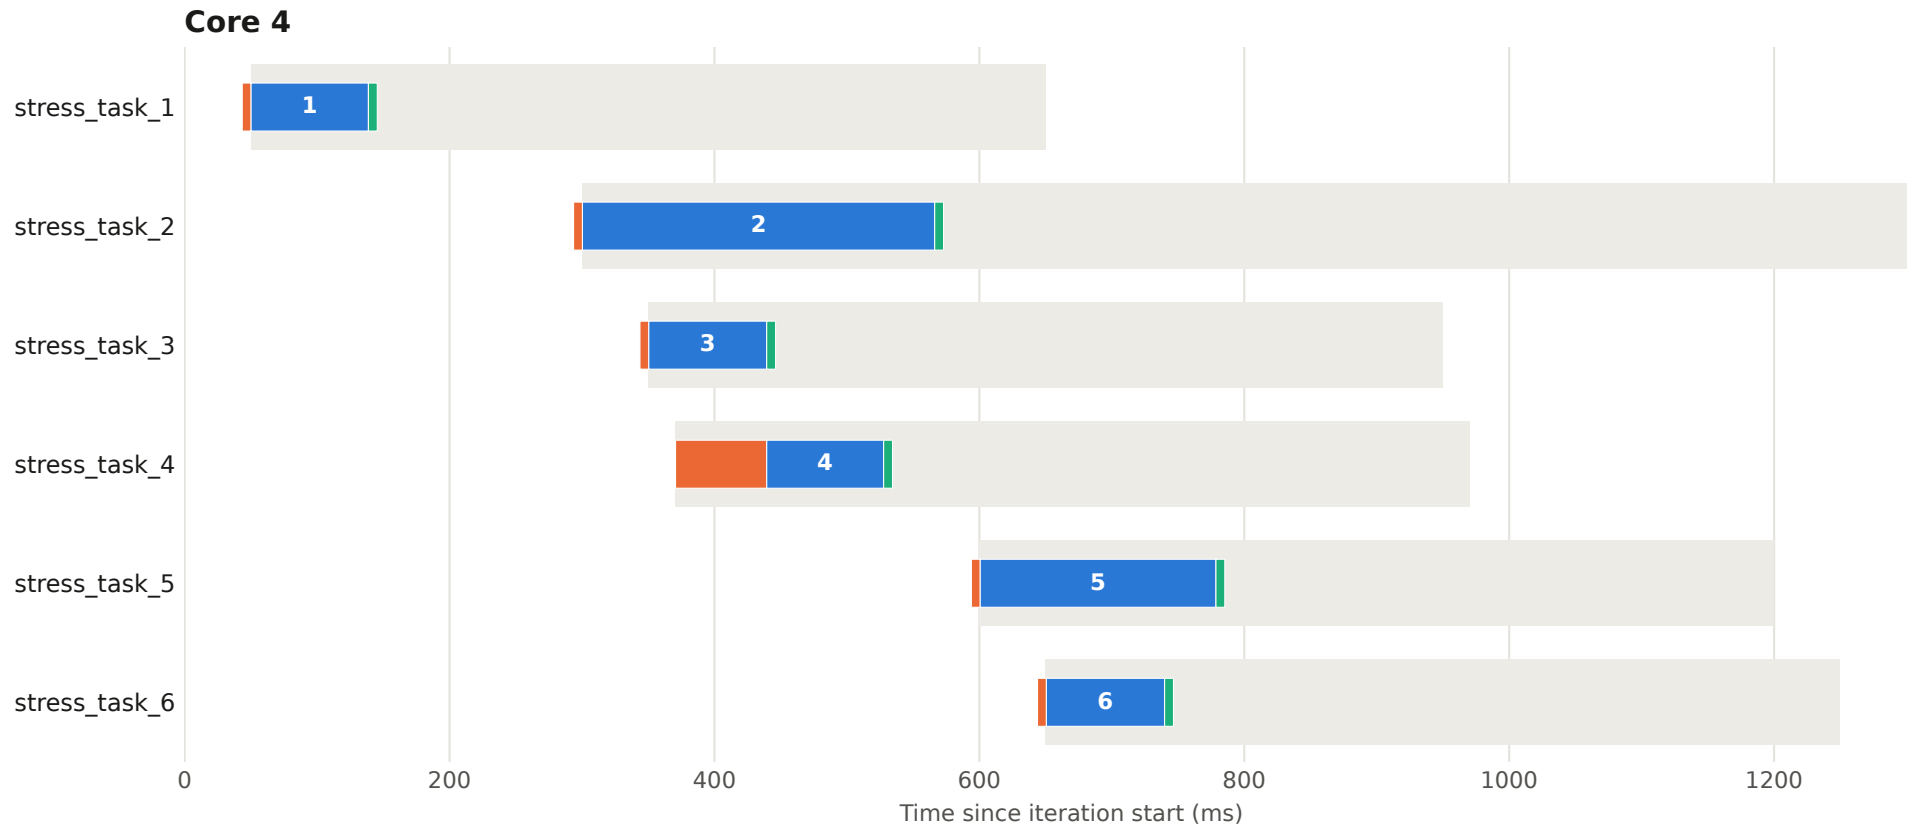


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 41 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

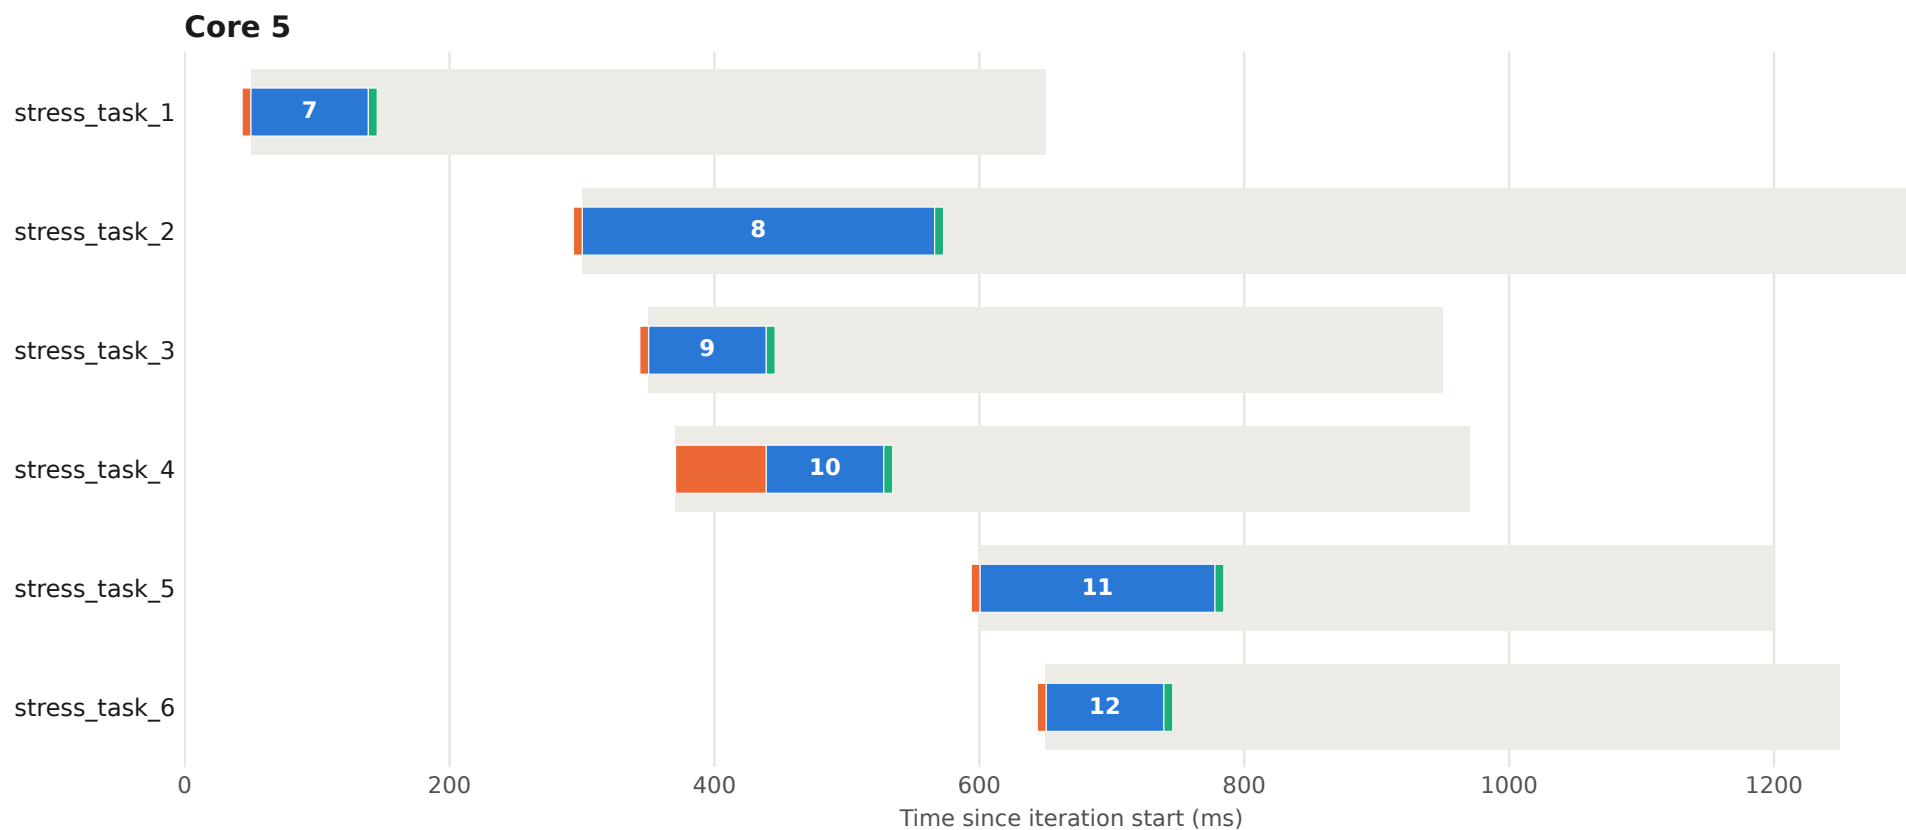


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 41 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

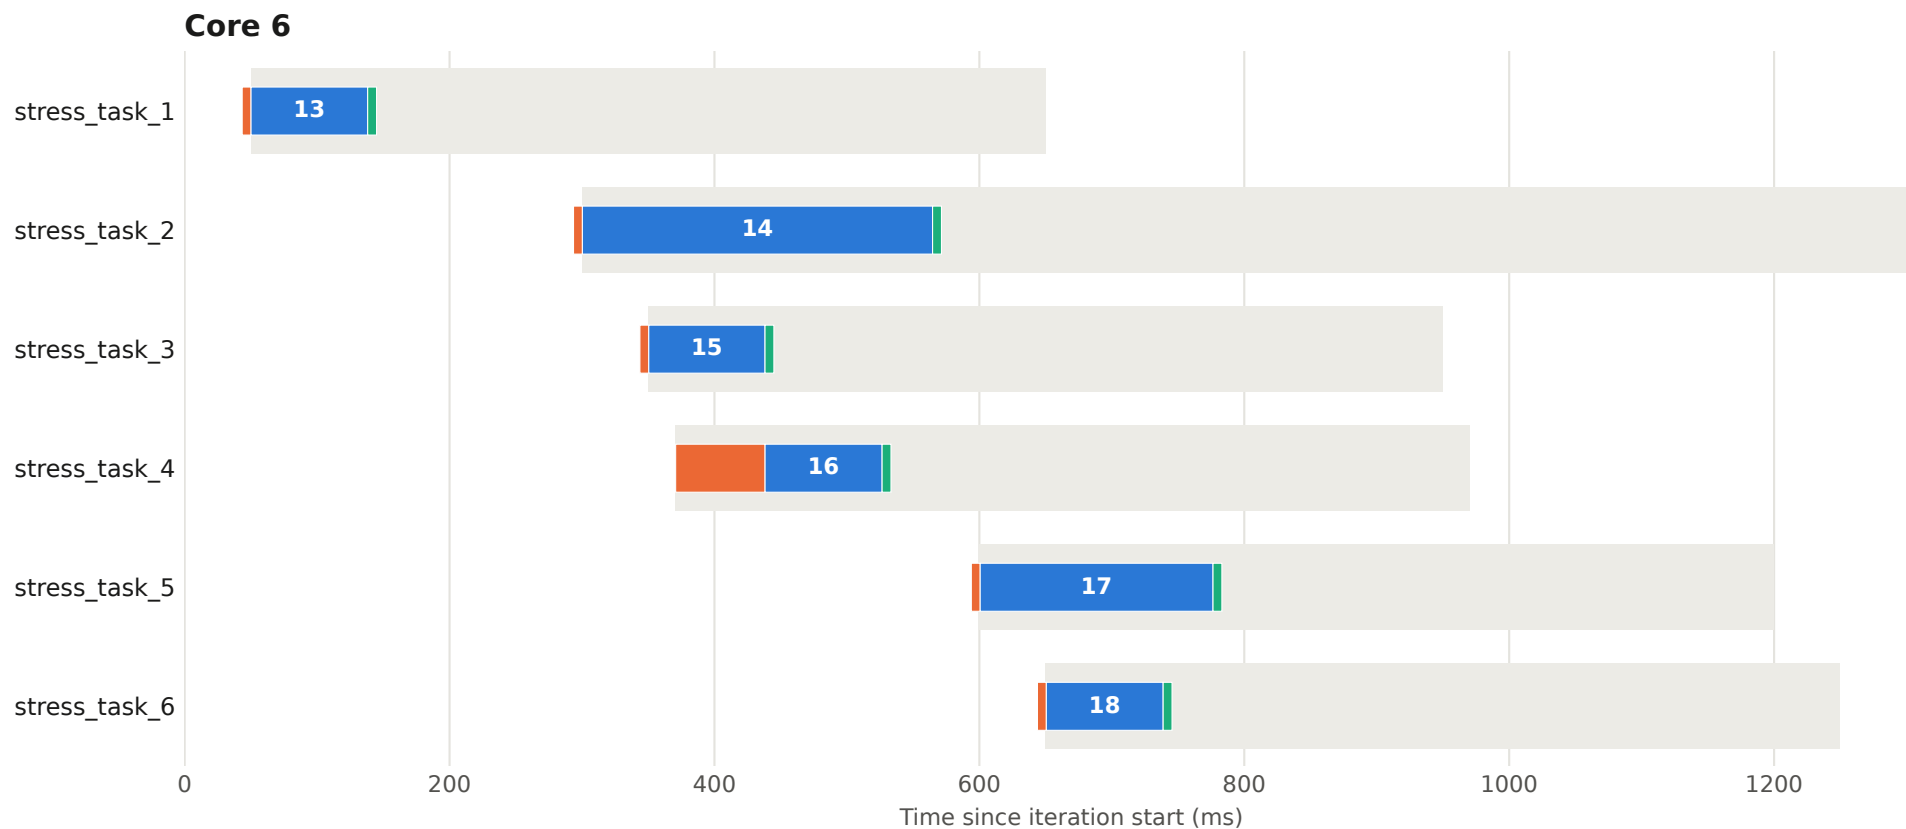


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 41 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

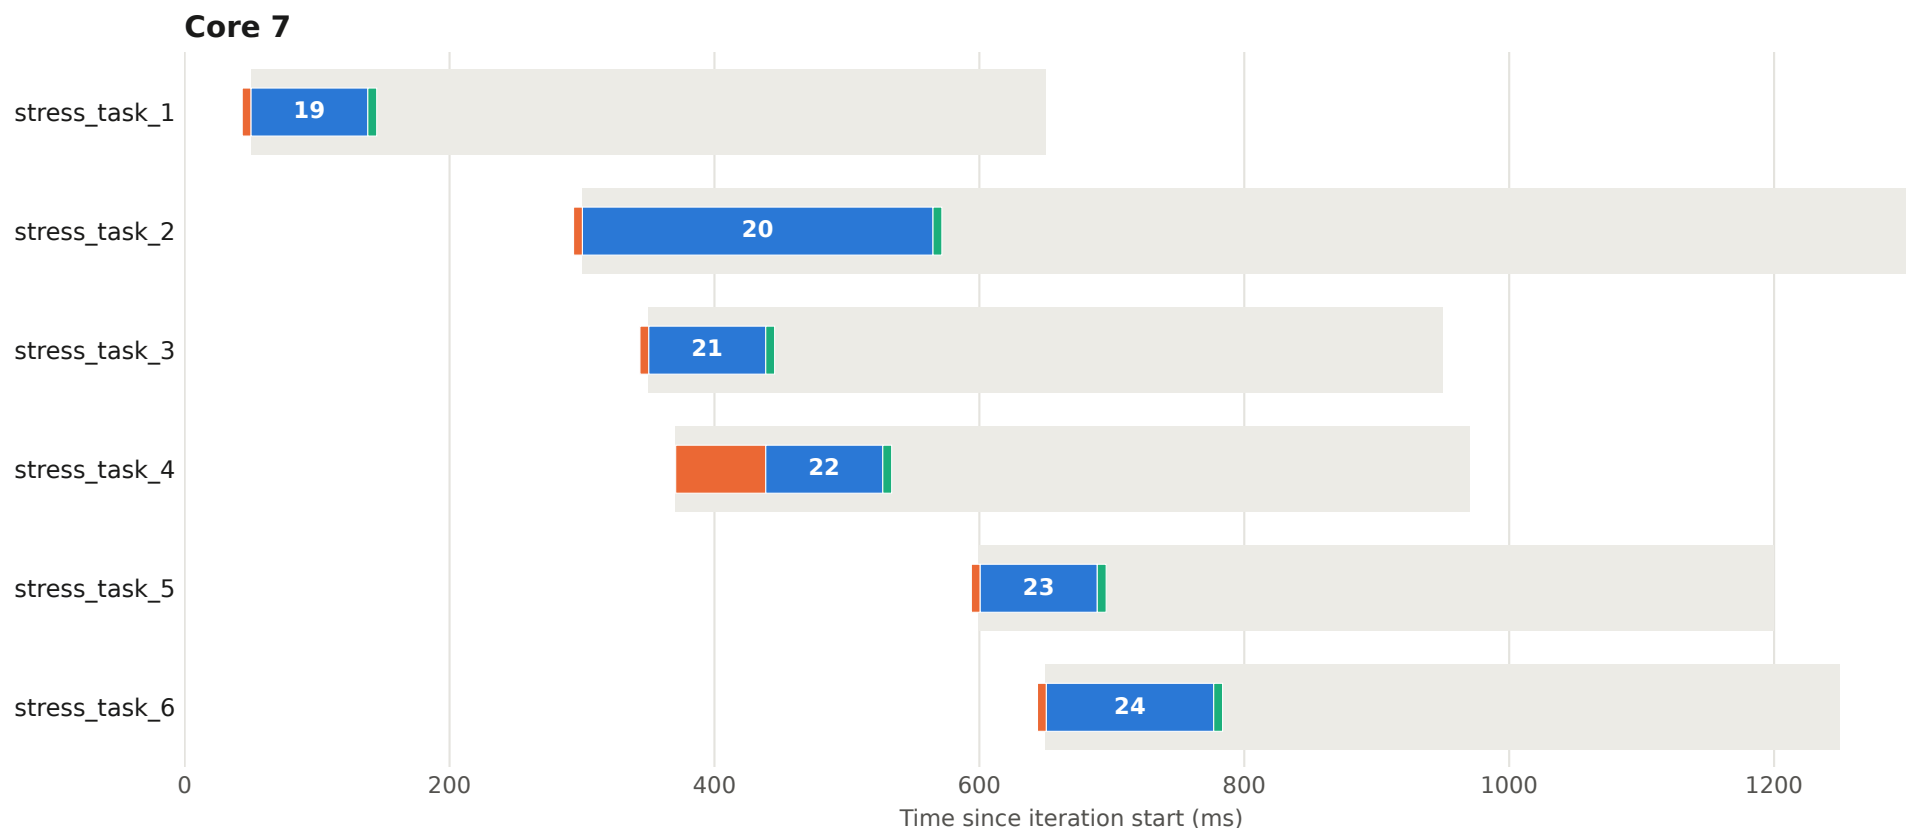


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 42 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

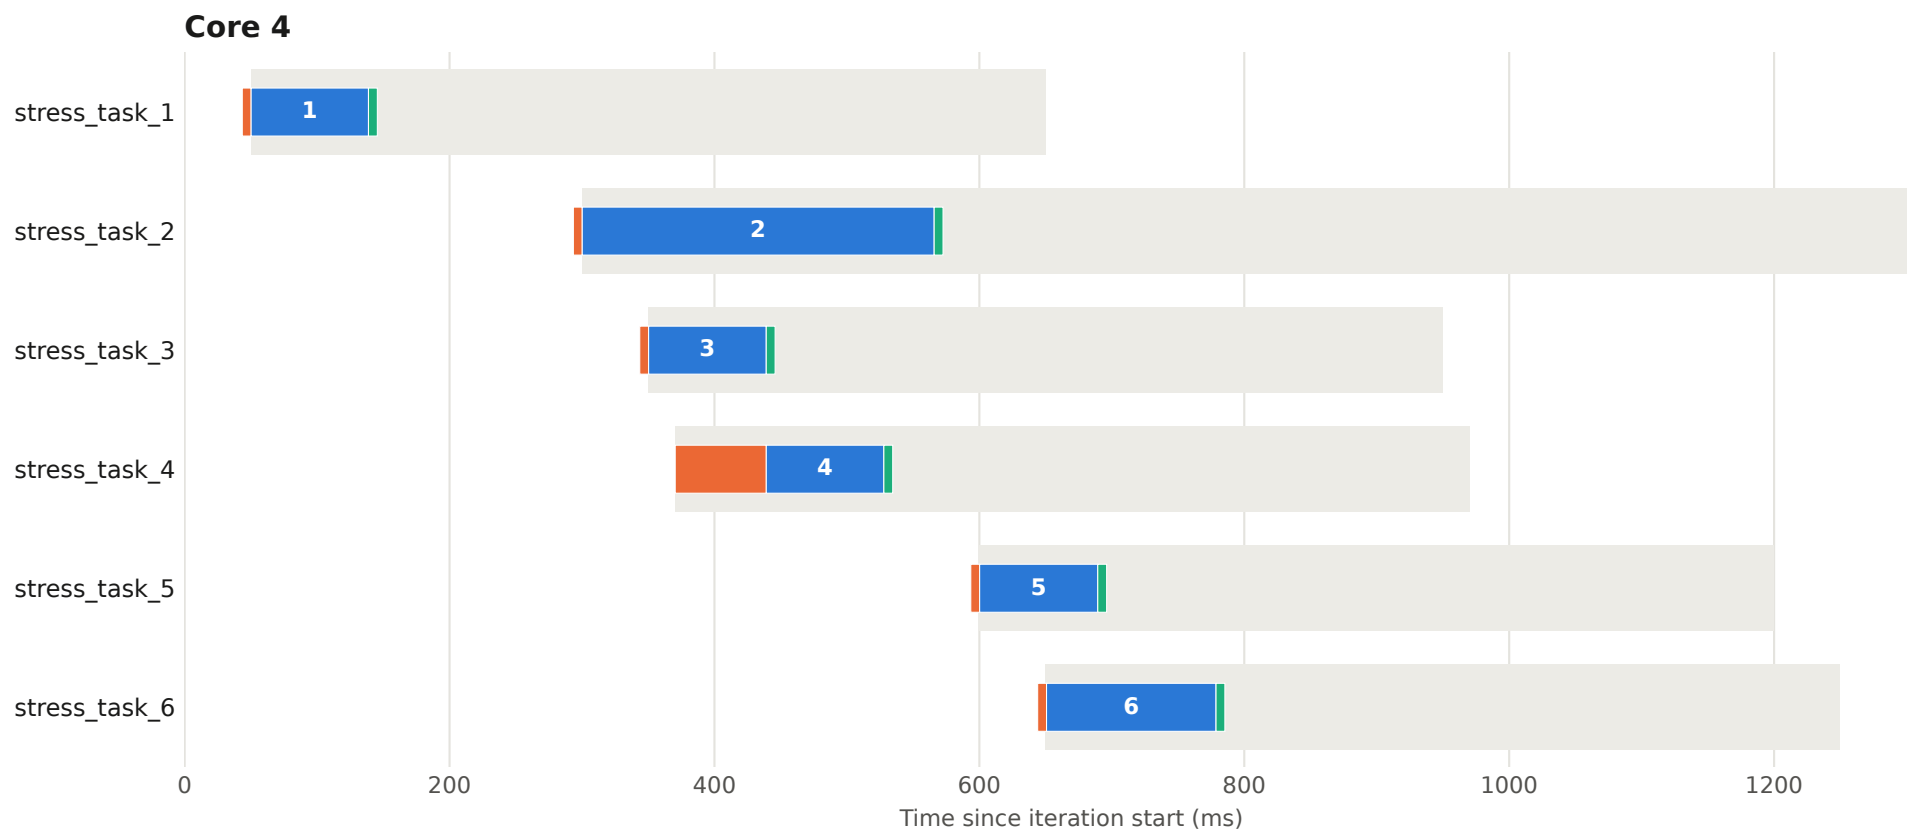


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 42 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

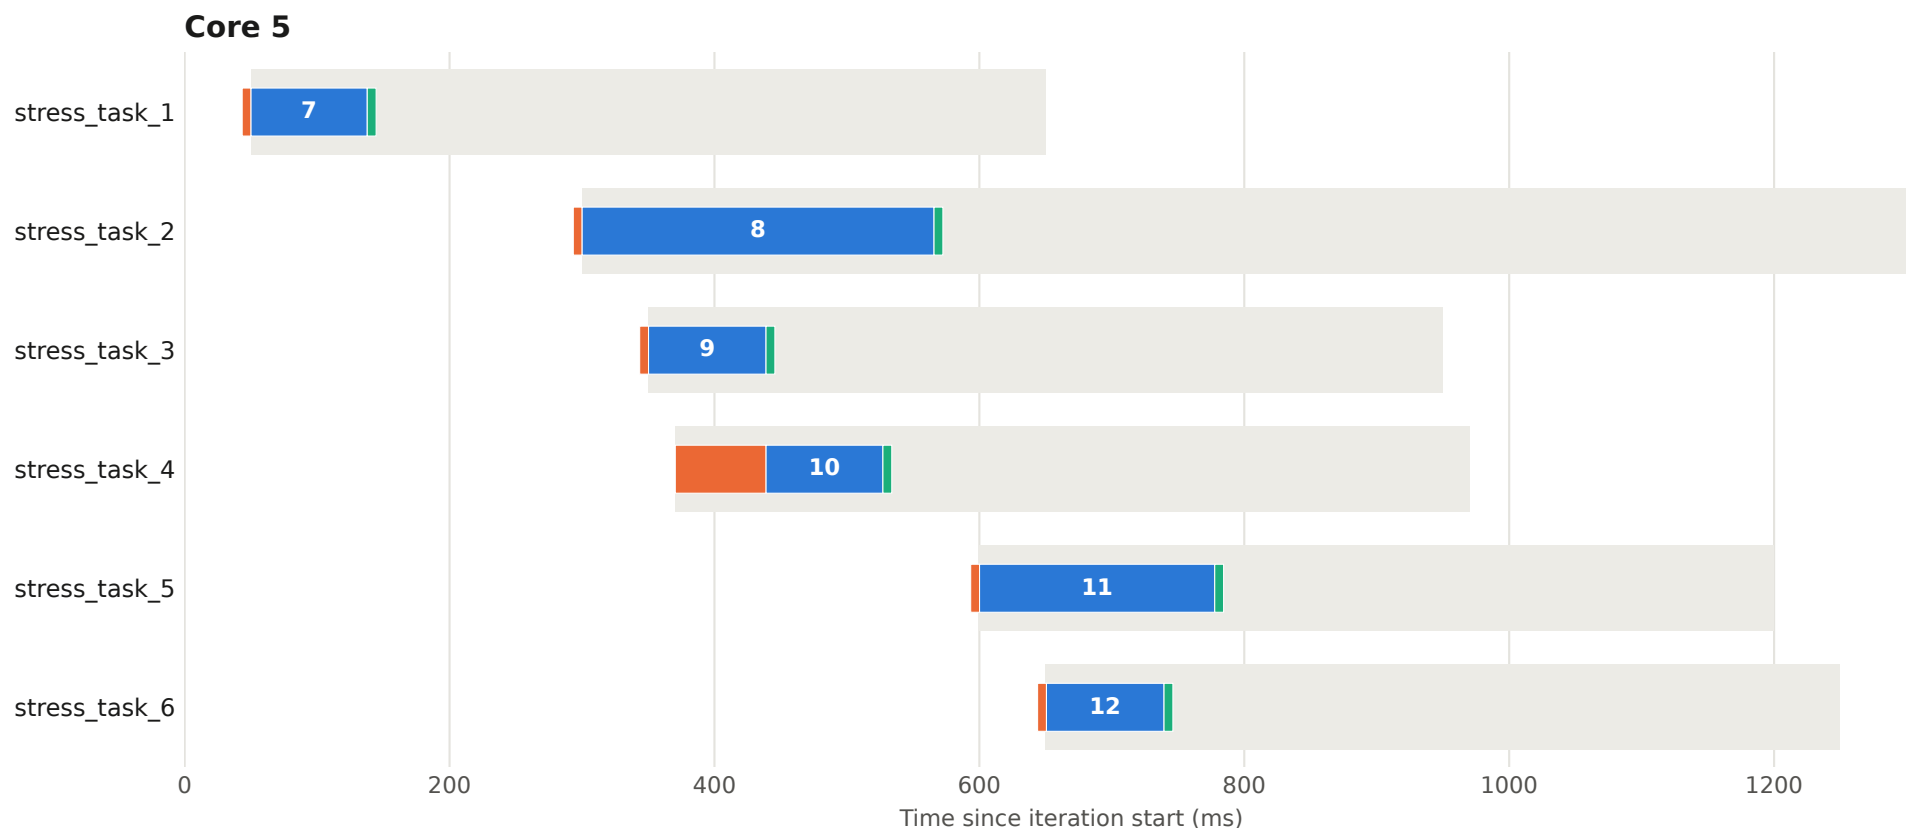


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 42 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

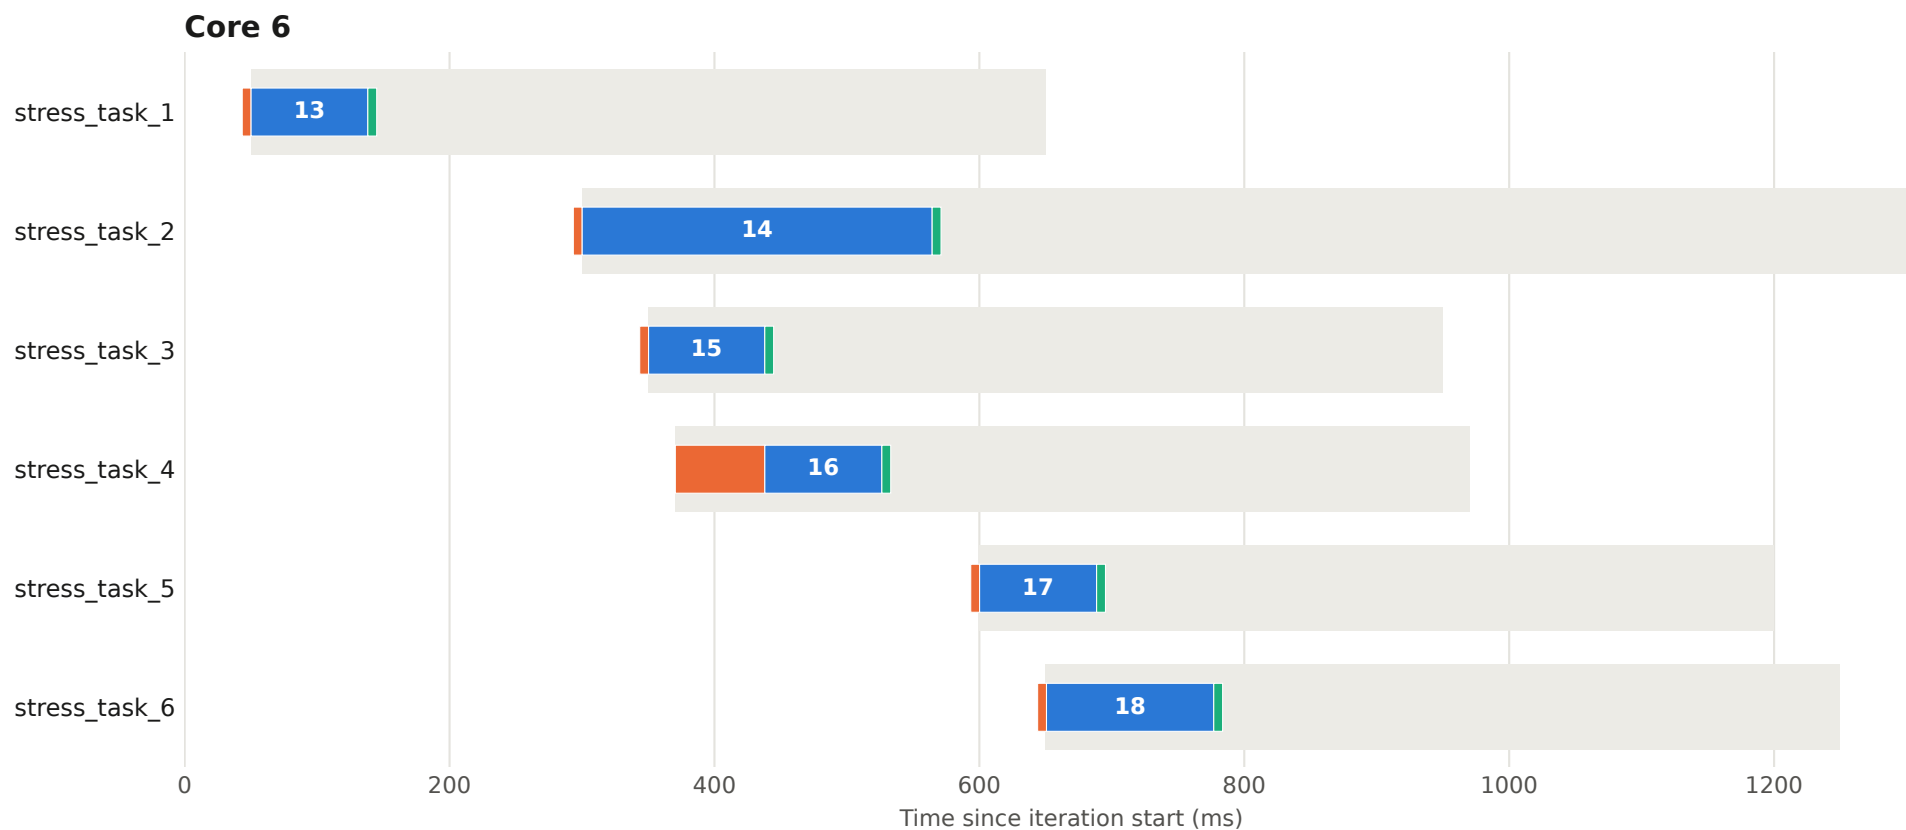


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 42 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

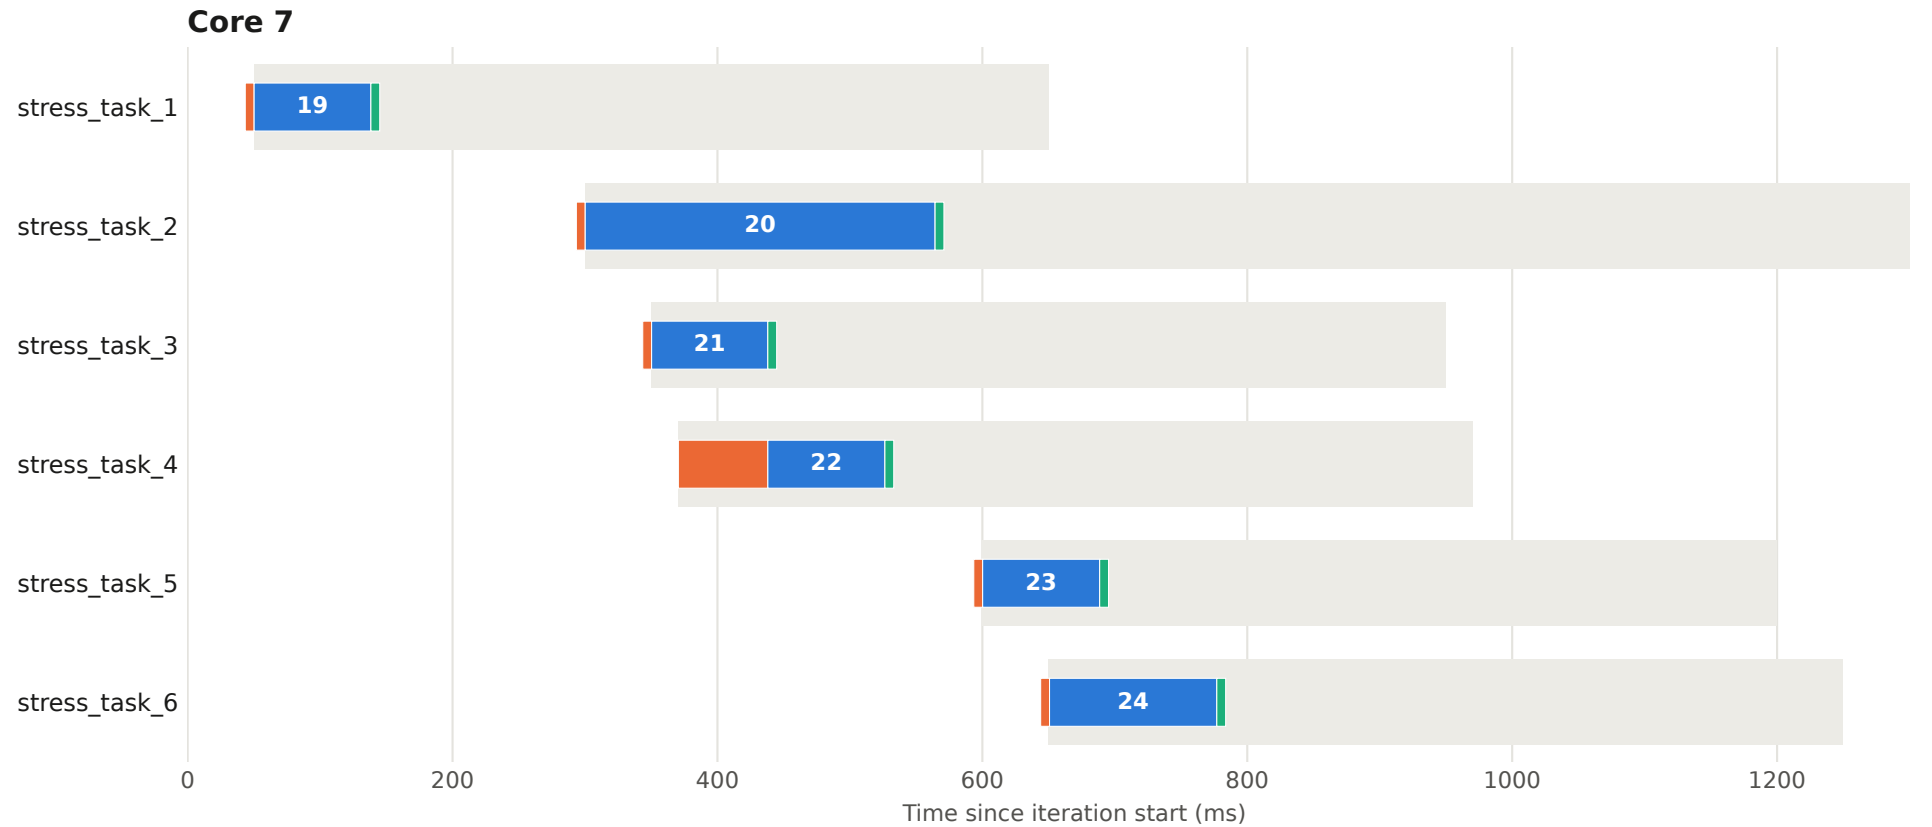


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 43 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

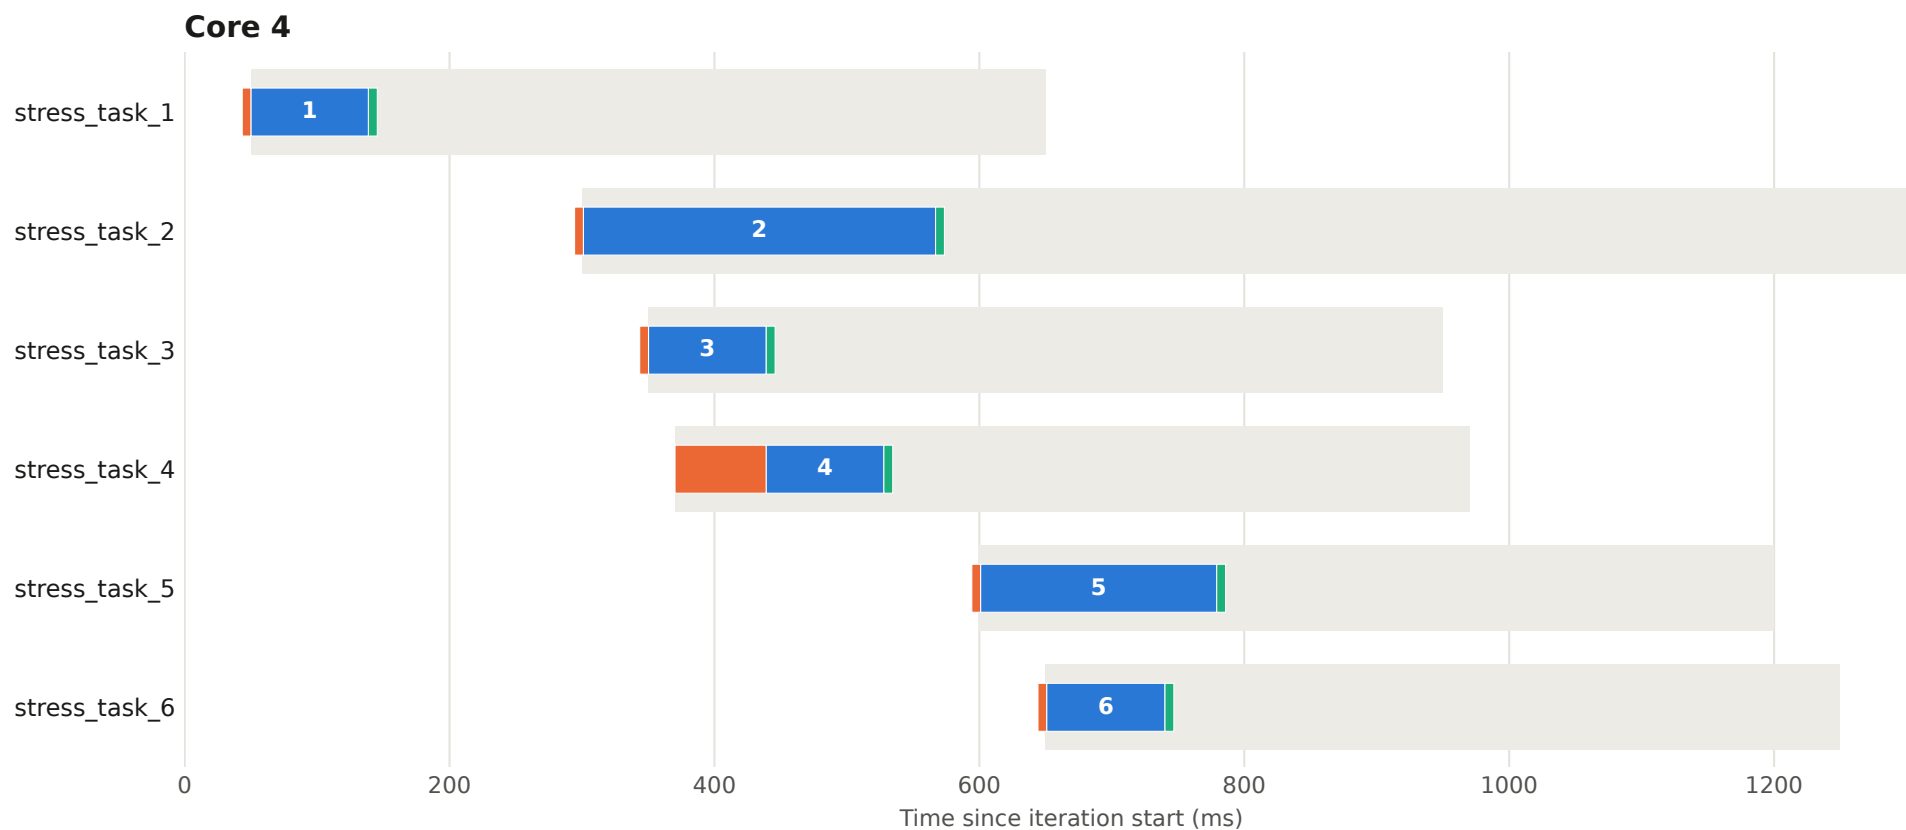


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 43 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

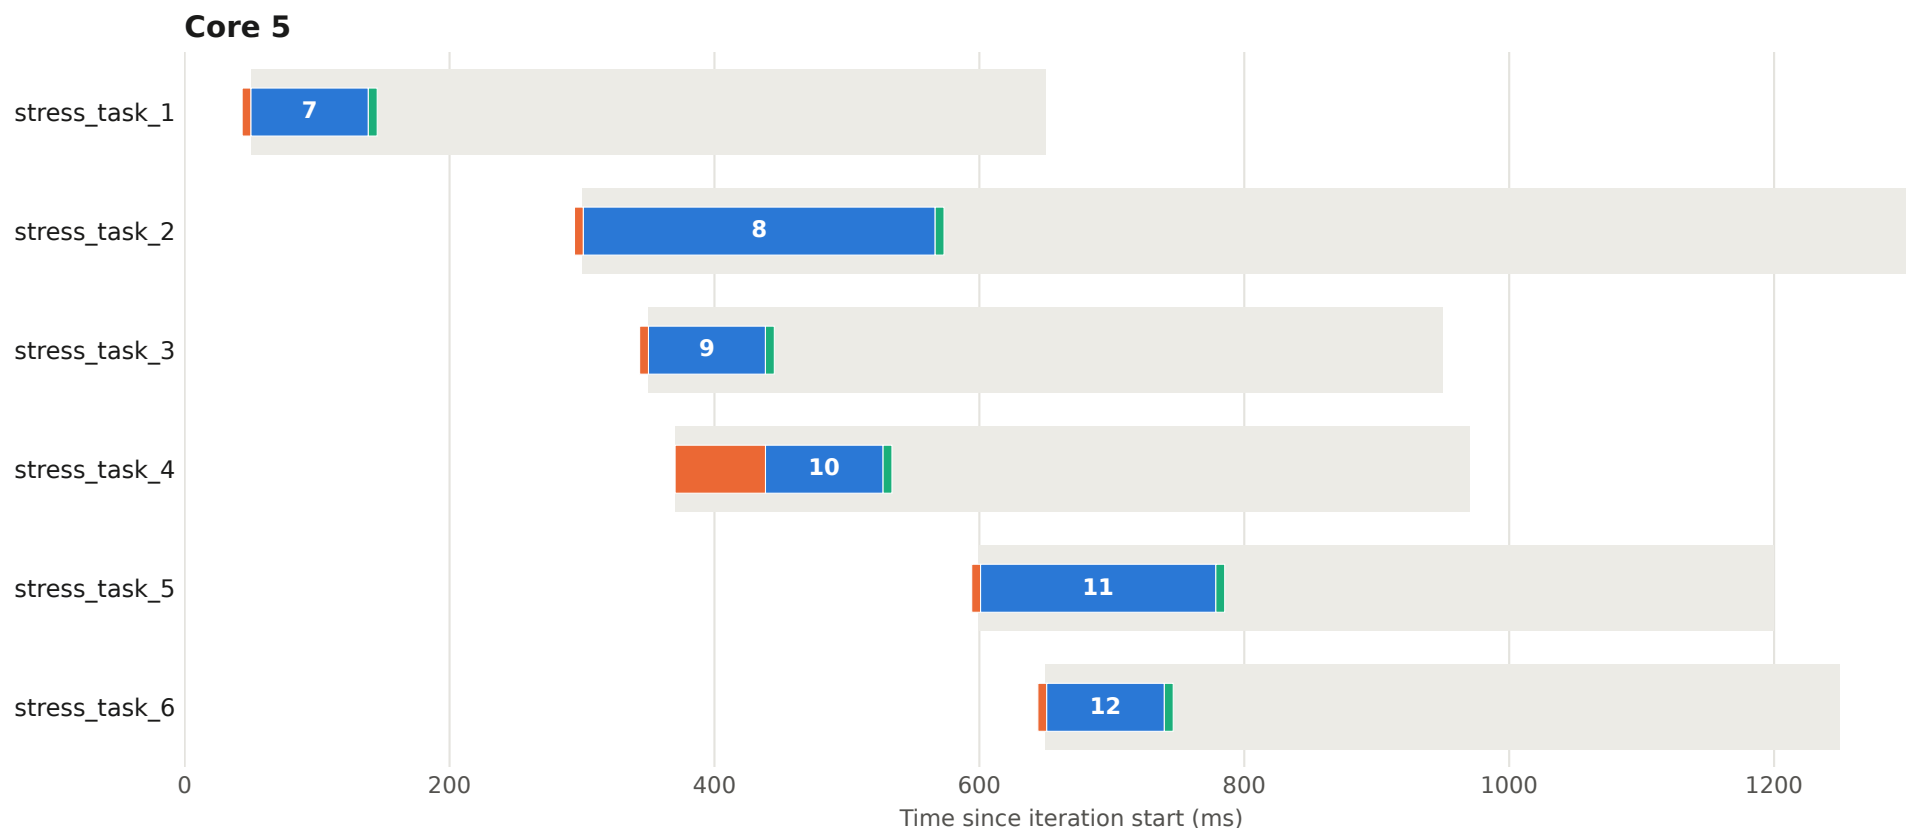


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 43 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

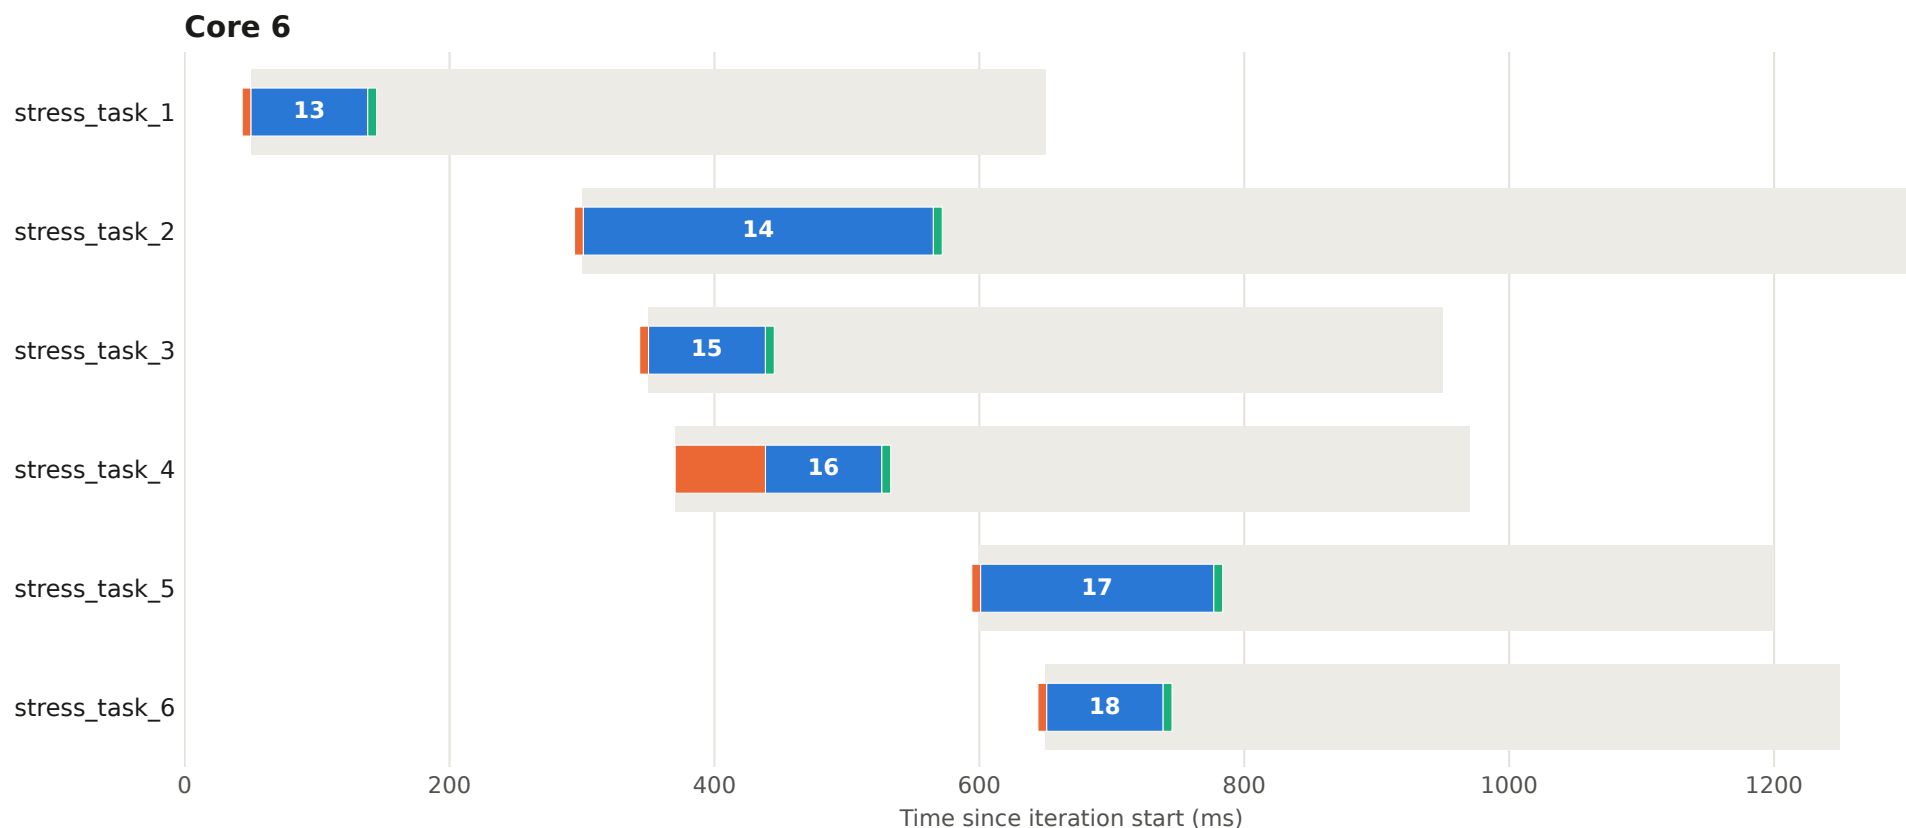


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 43 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

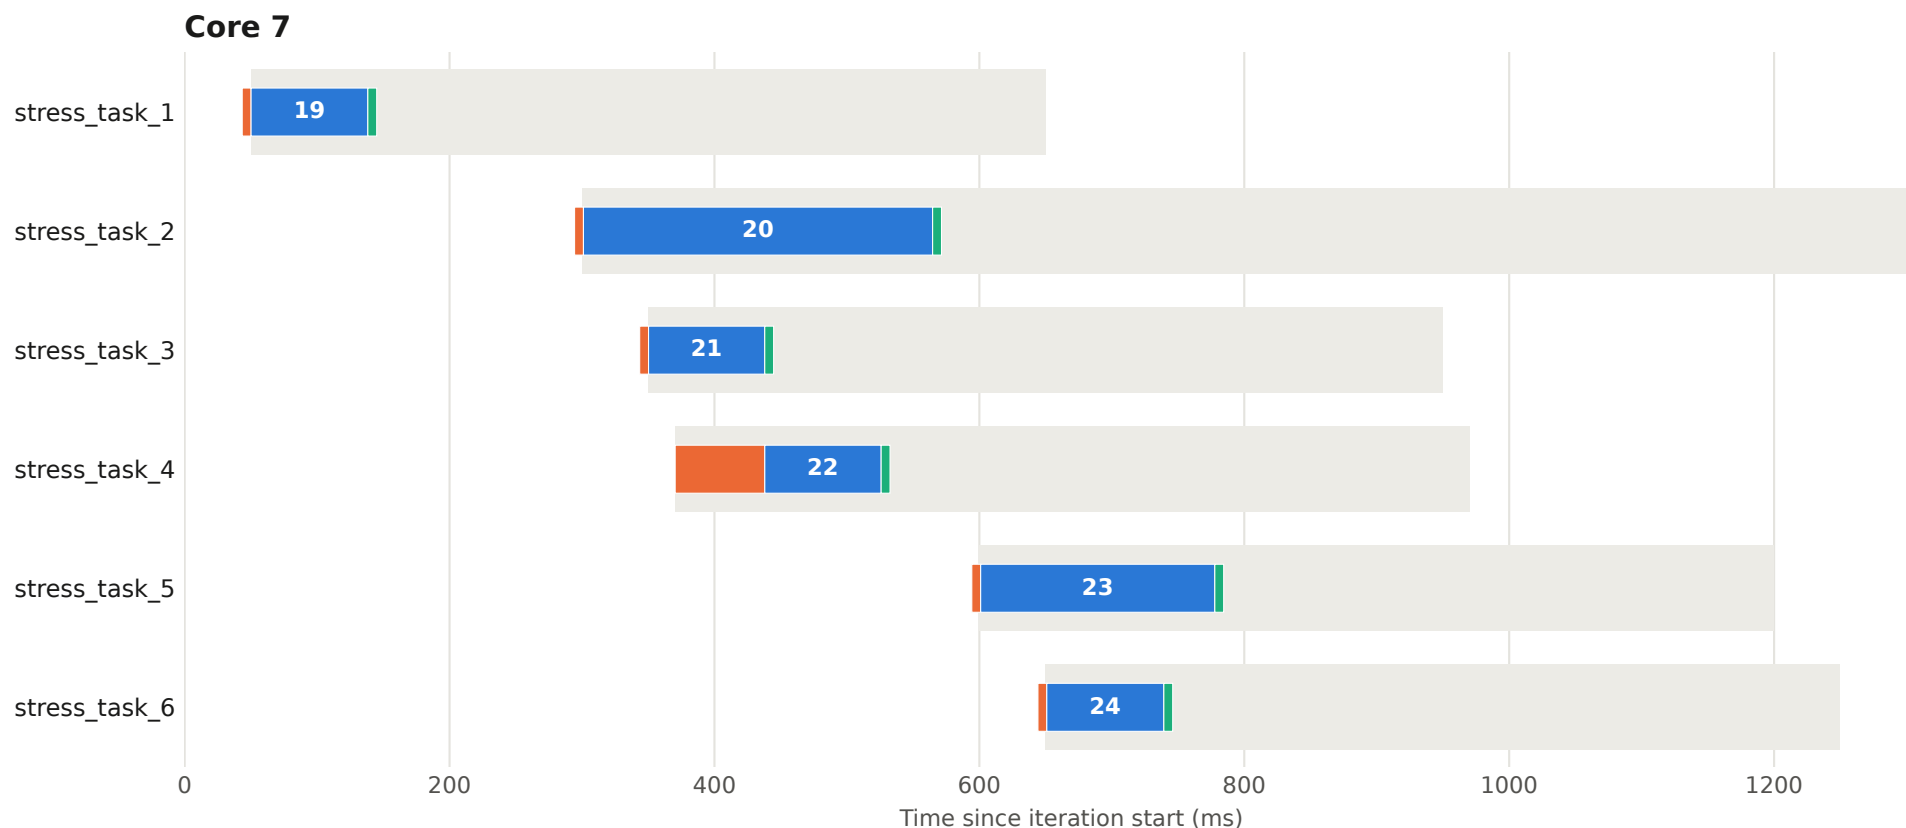


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 44 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

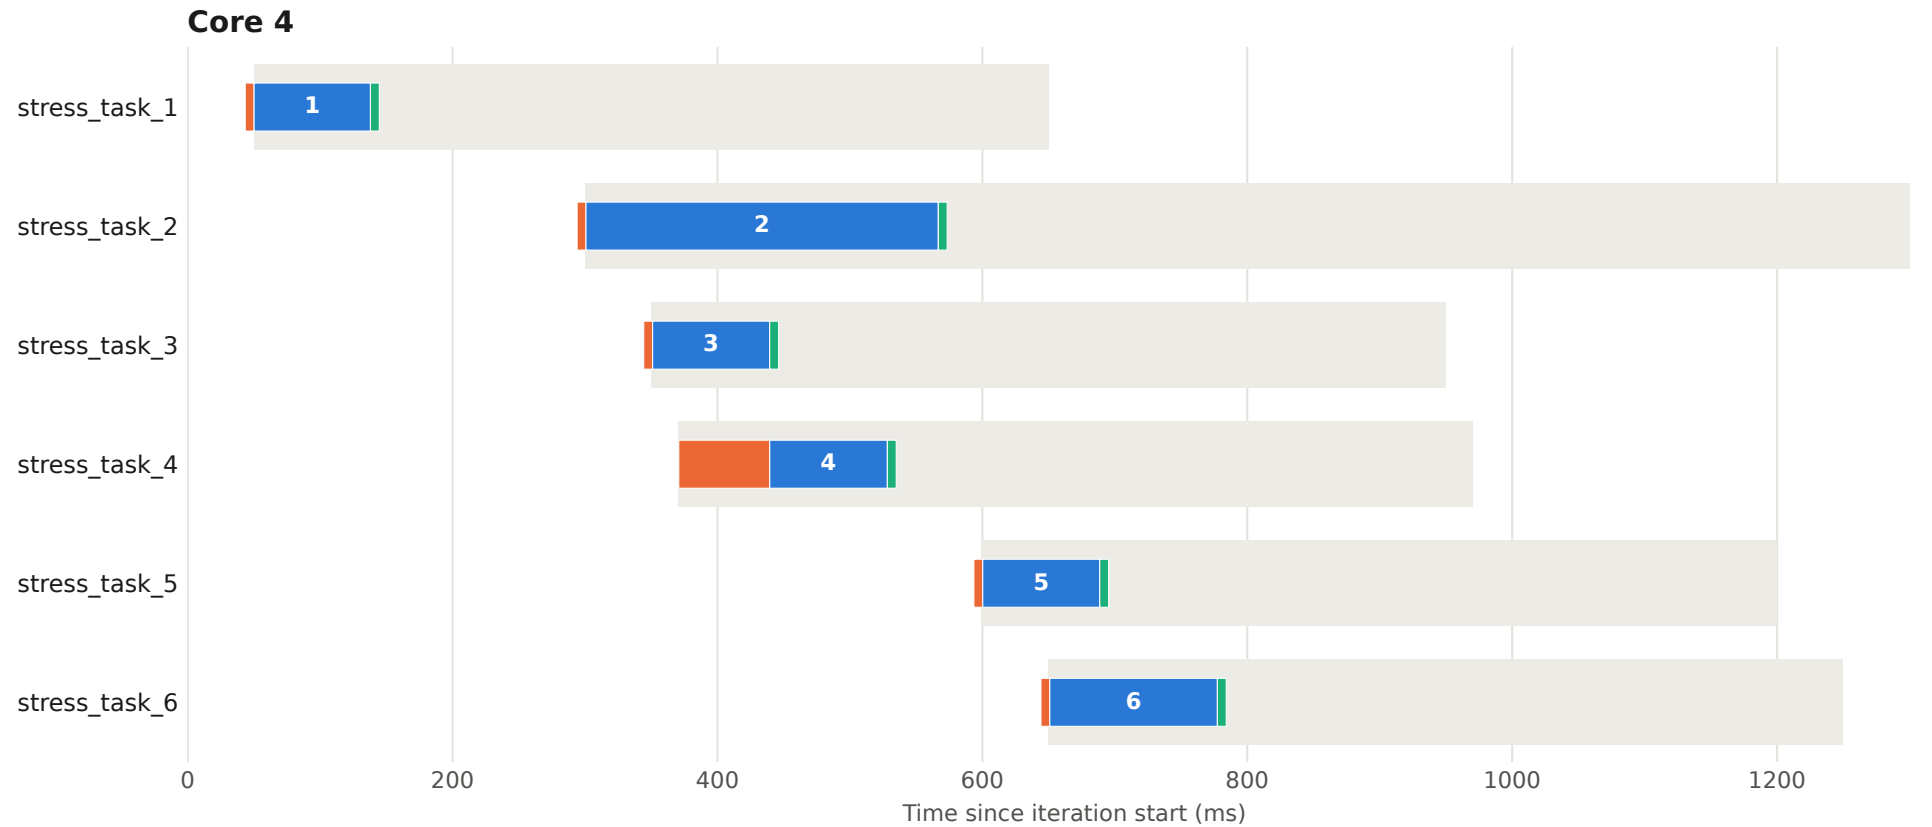


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 44 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

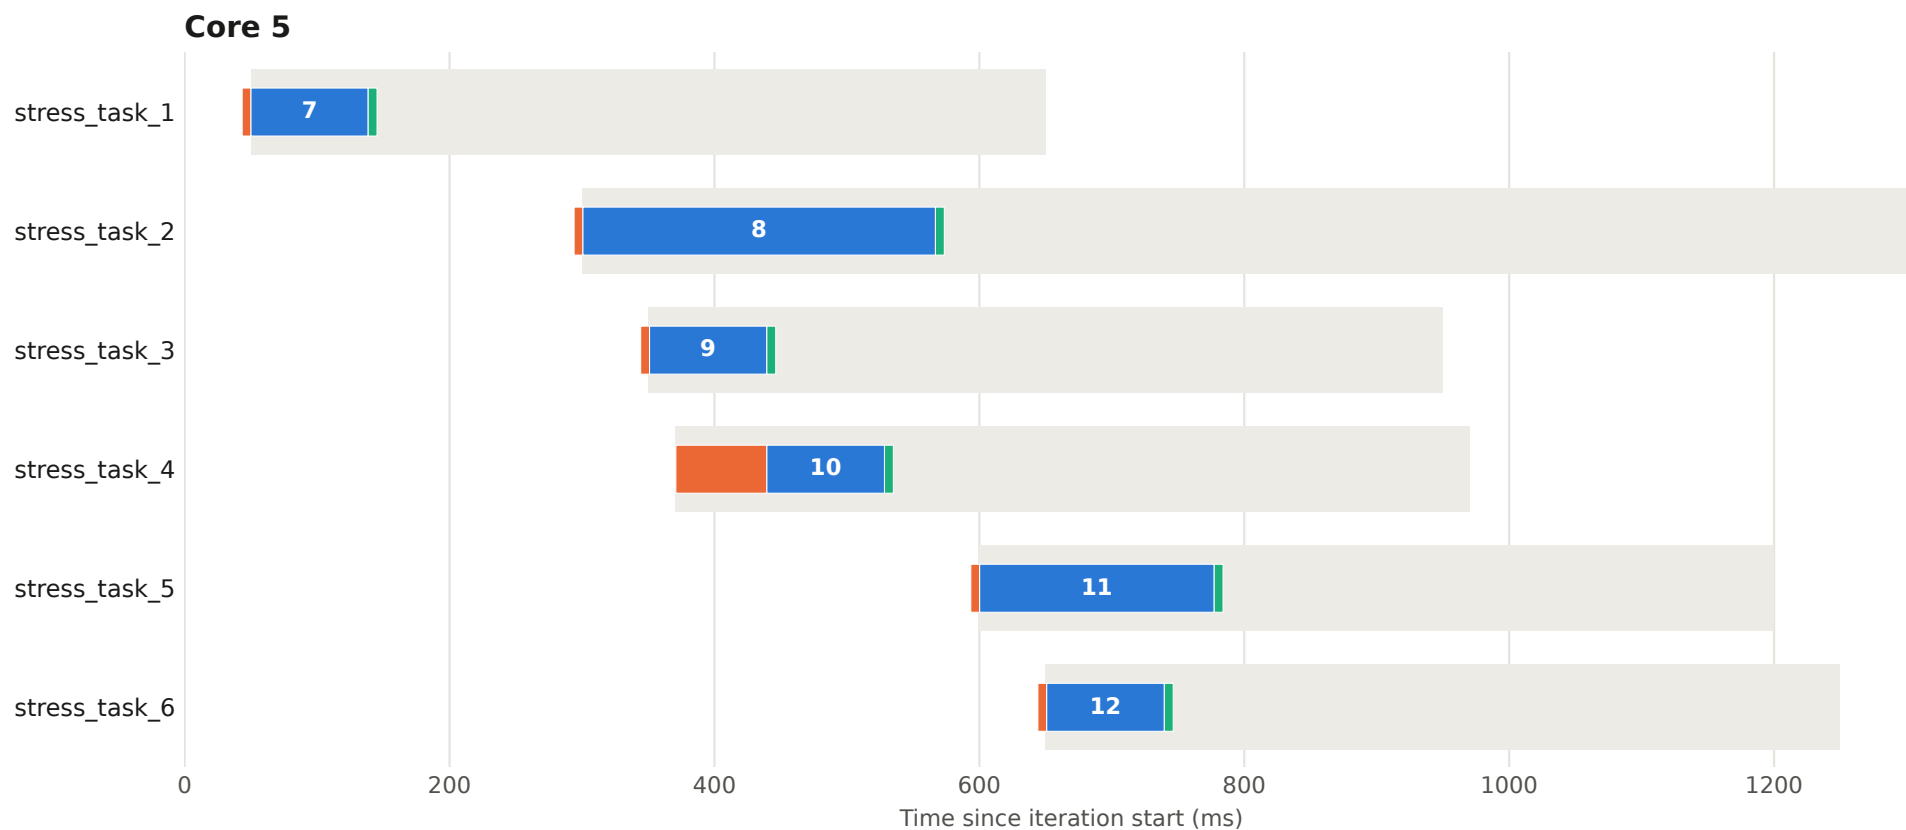


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 44 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

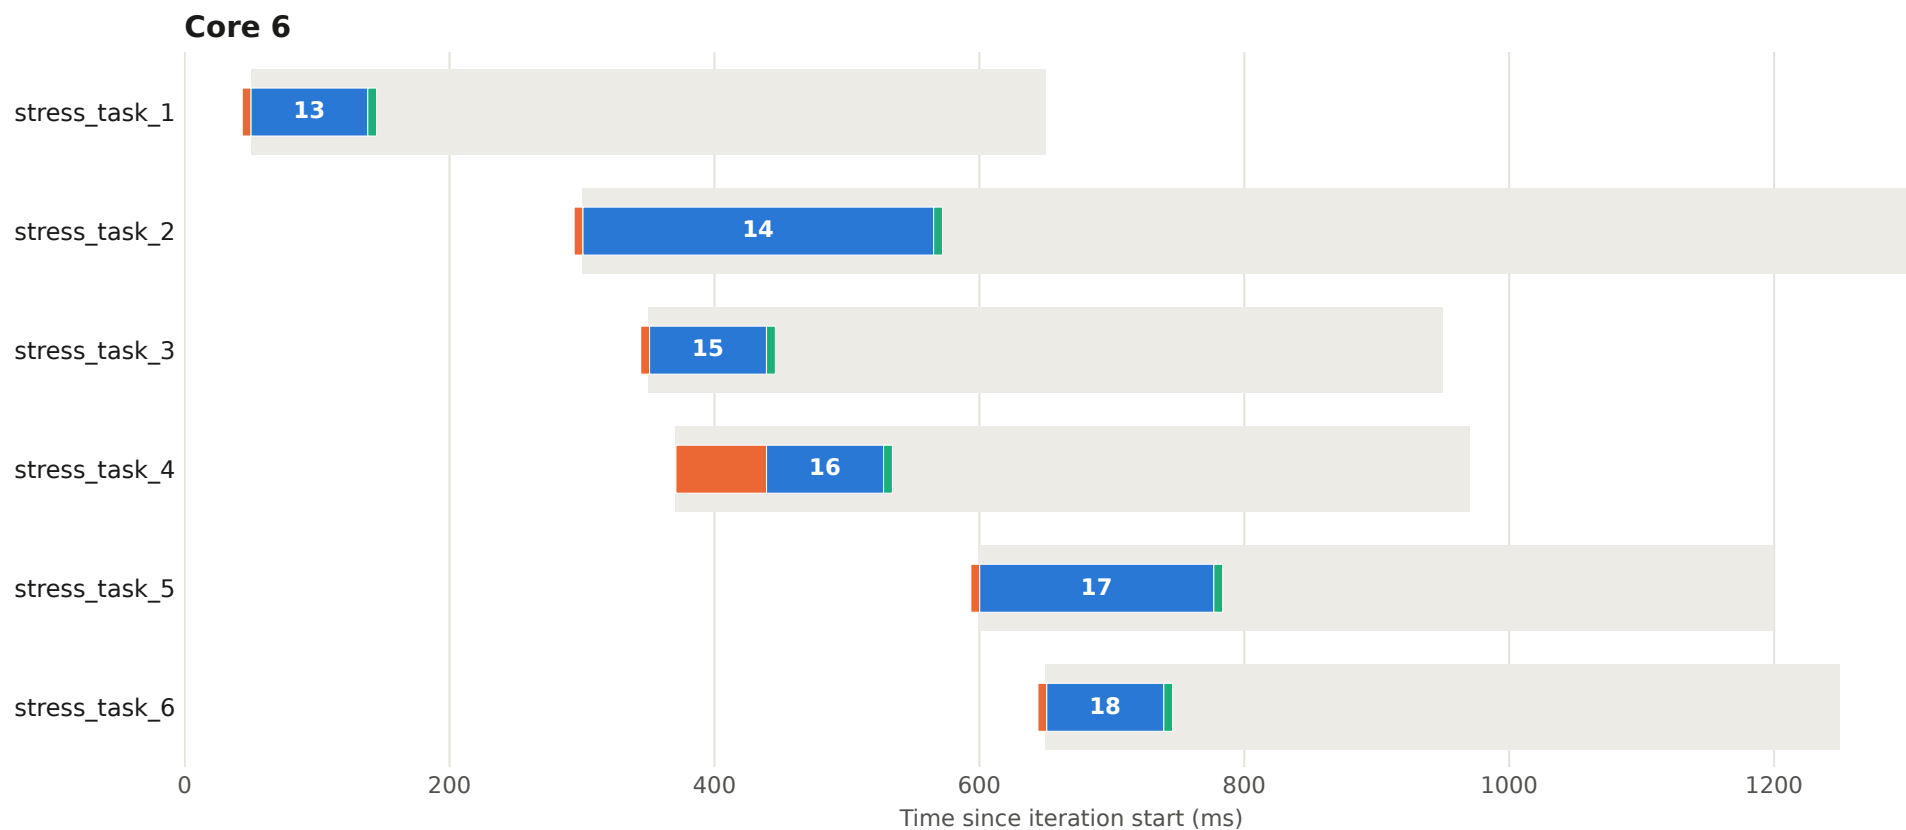


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 44 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

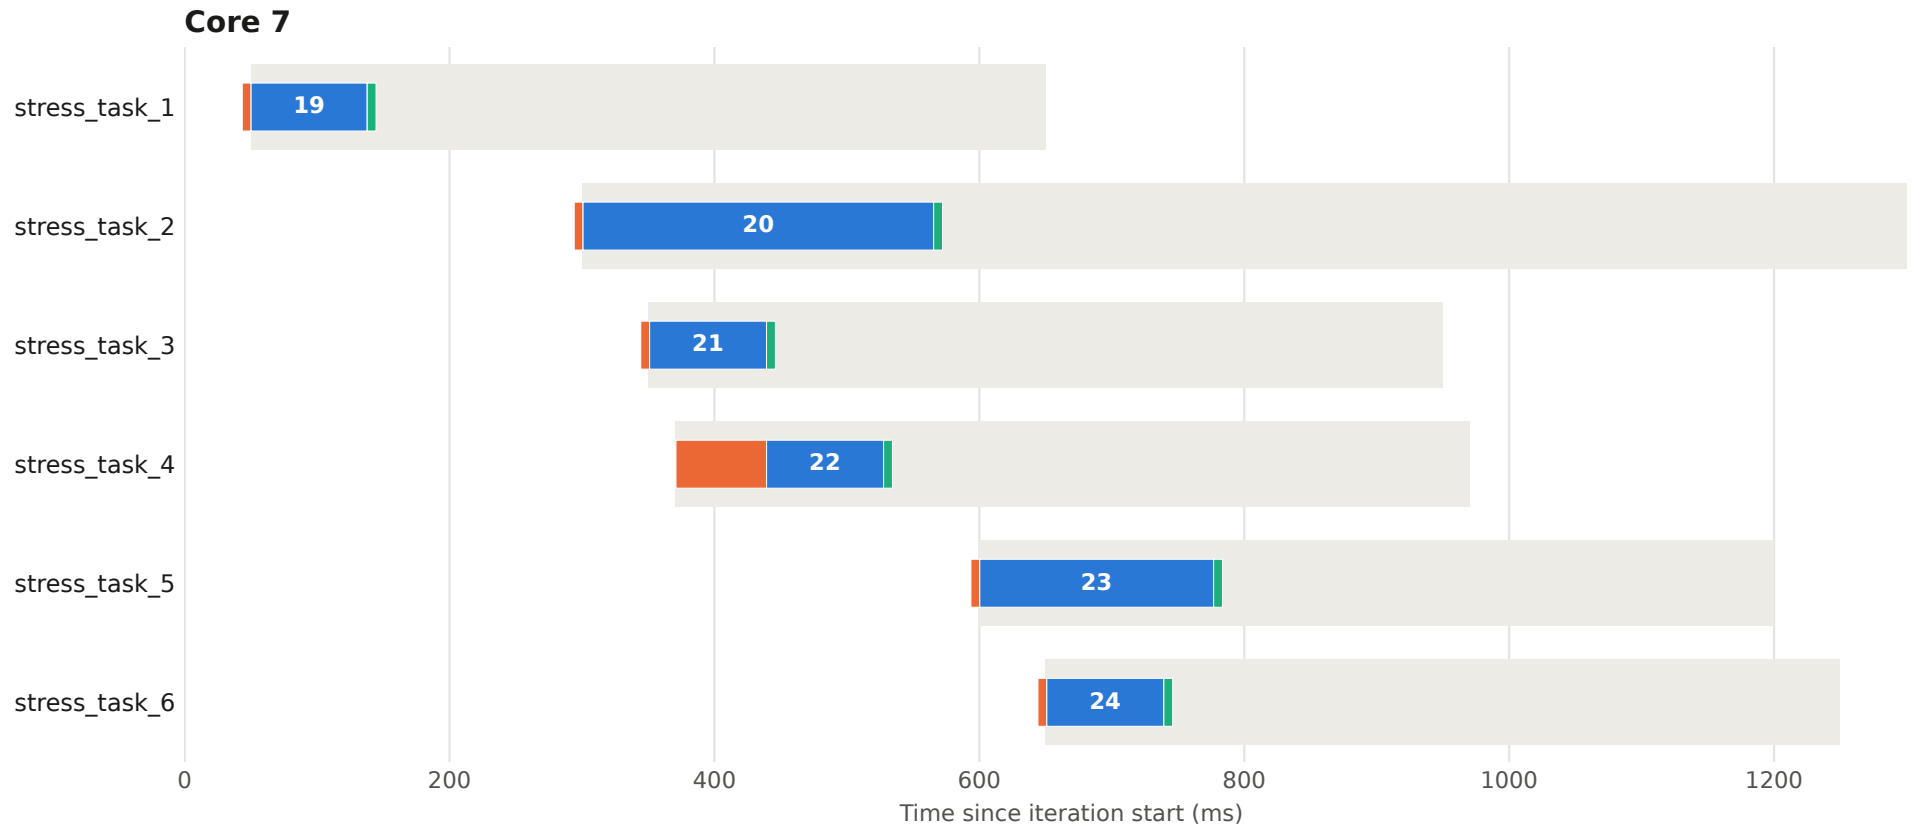


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 45 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

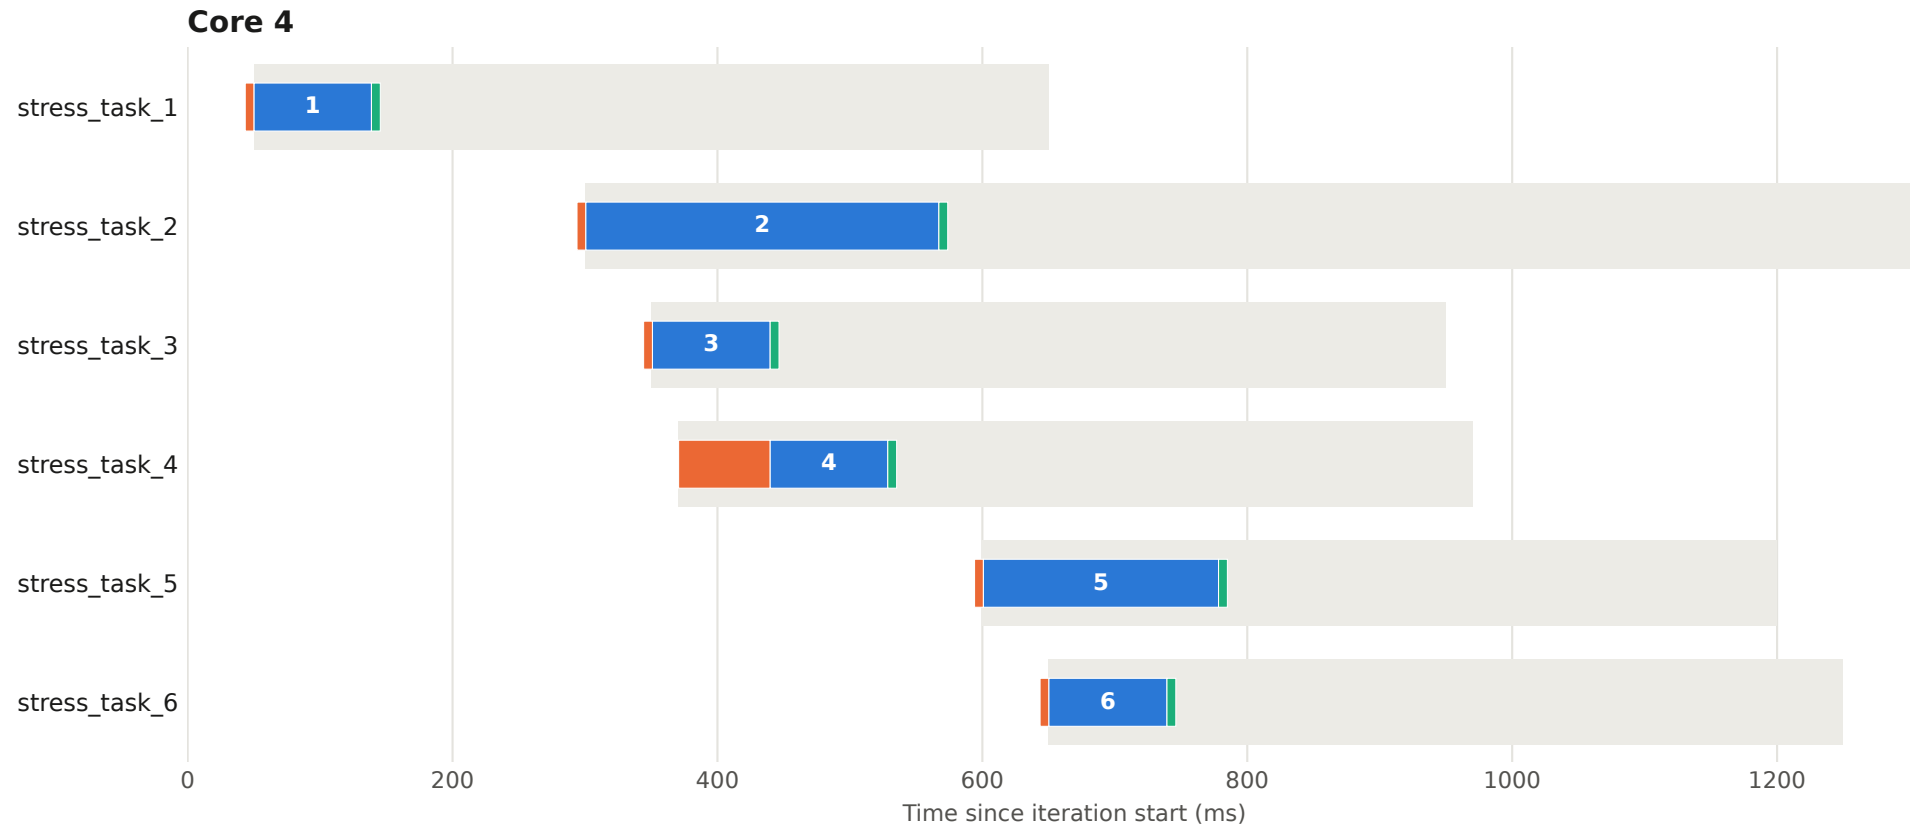


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 45 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

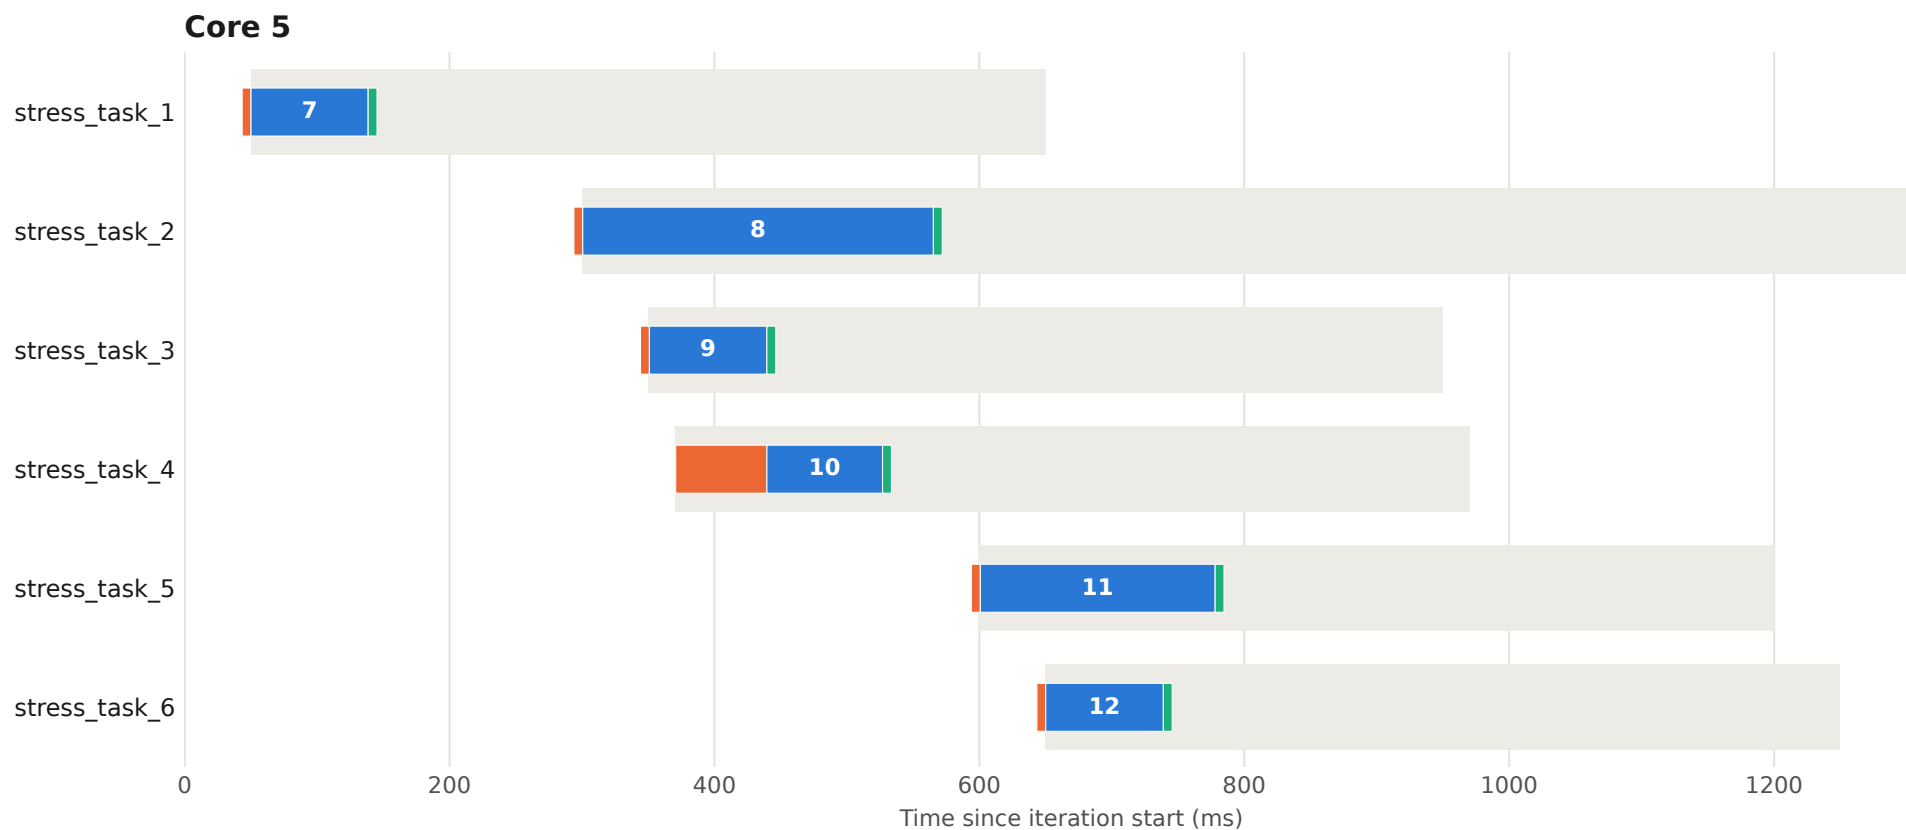


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 45 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

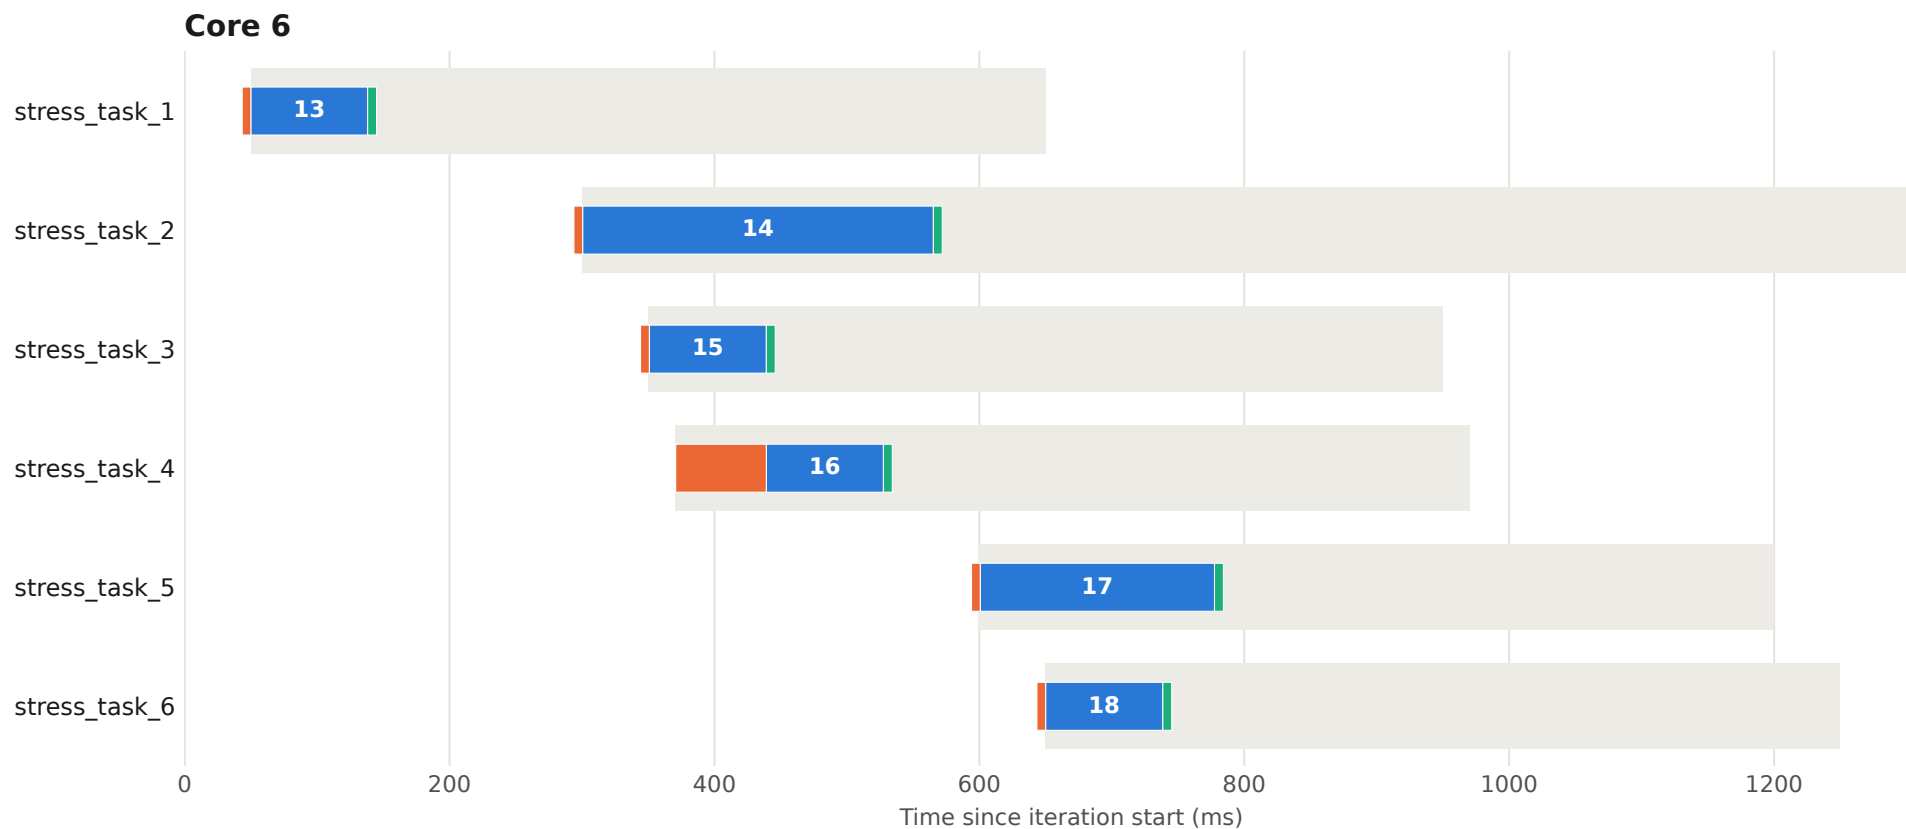


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 45 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

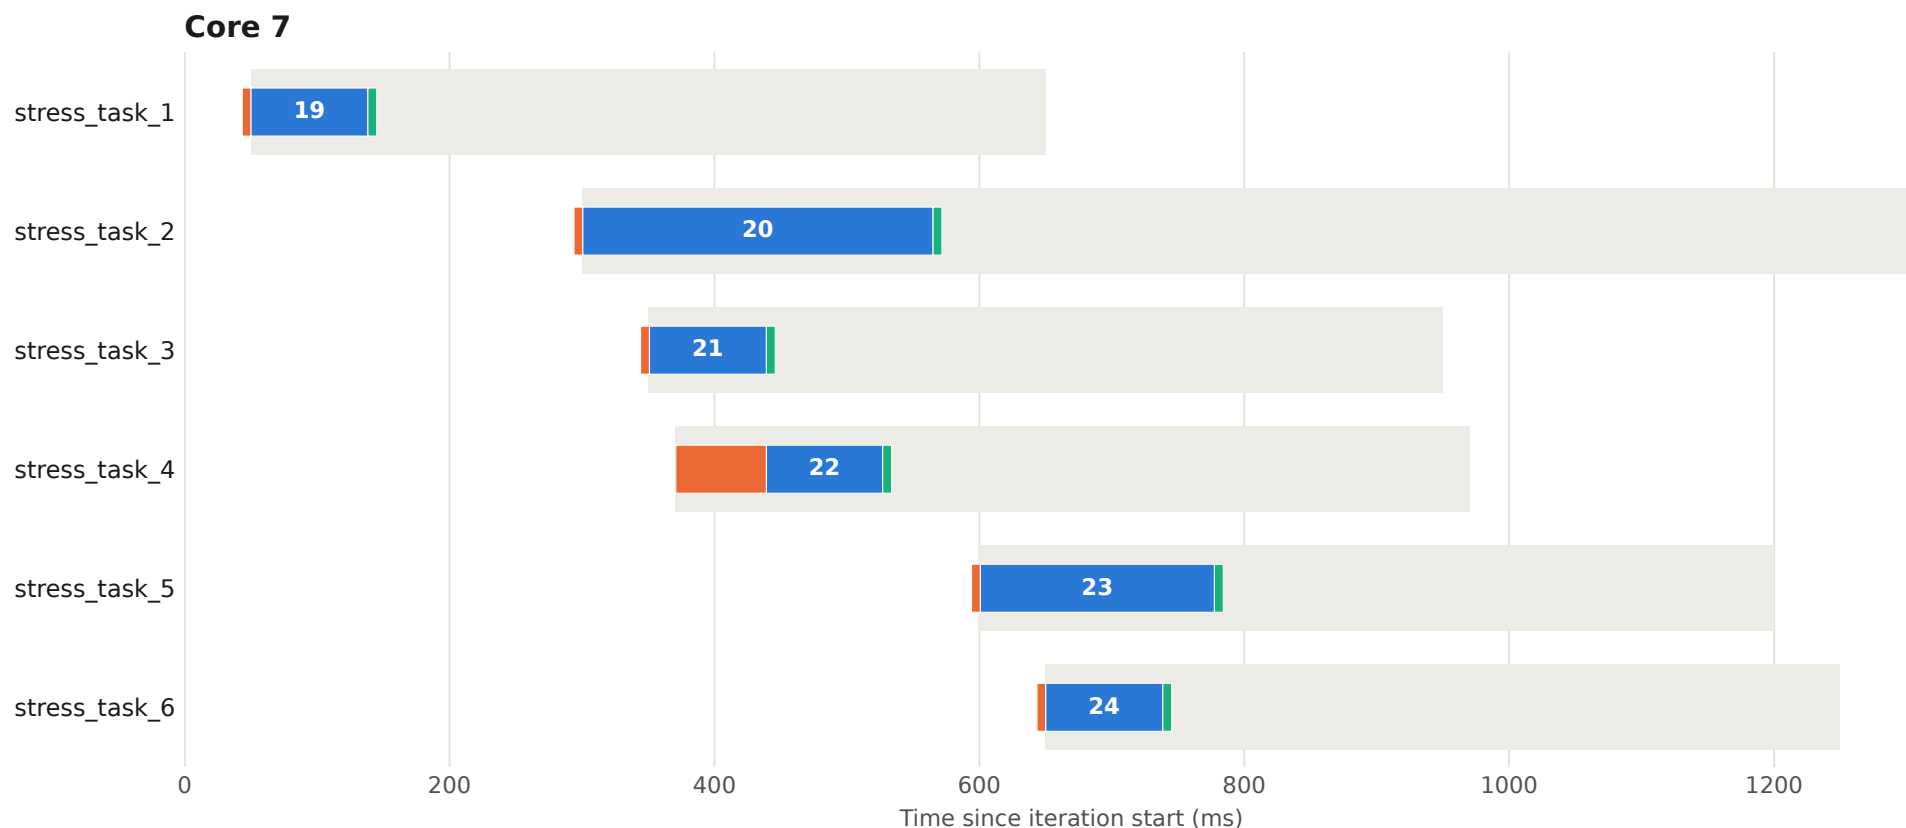


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 46 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

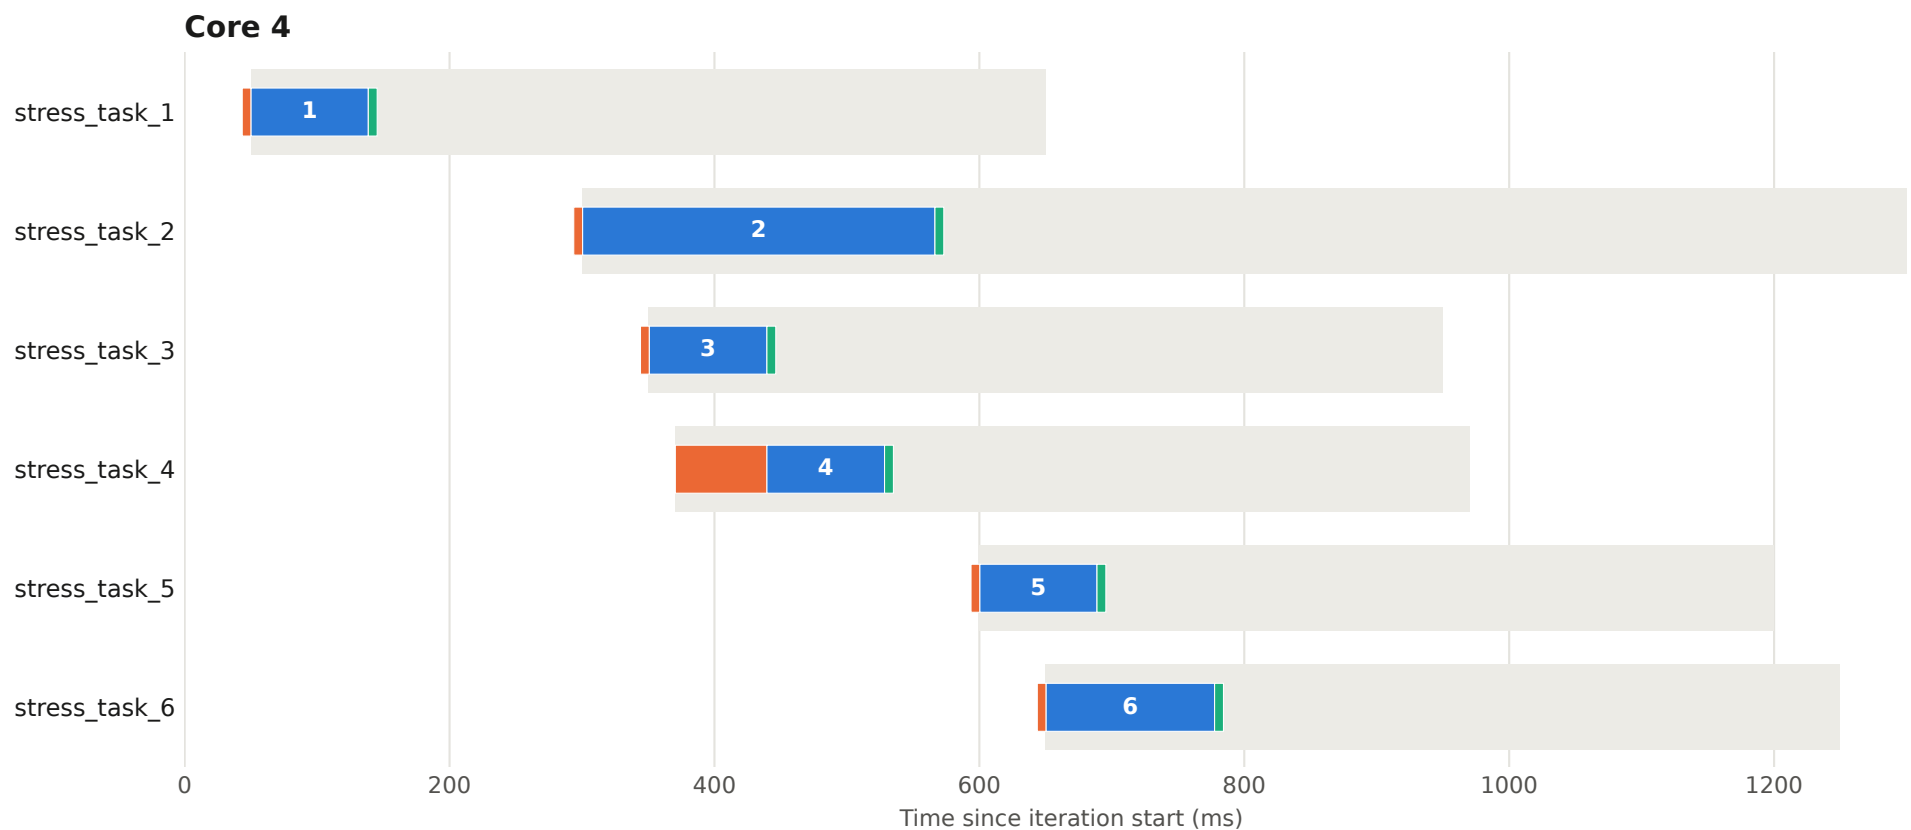


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 46 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

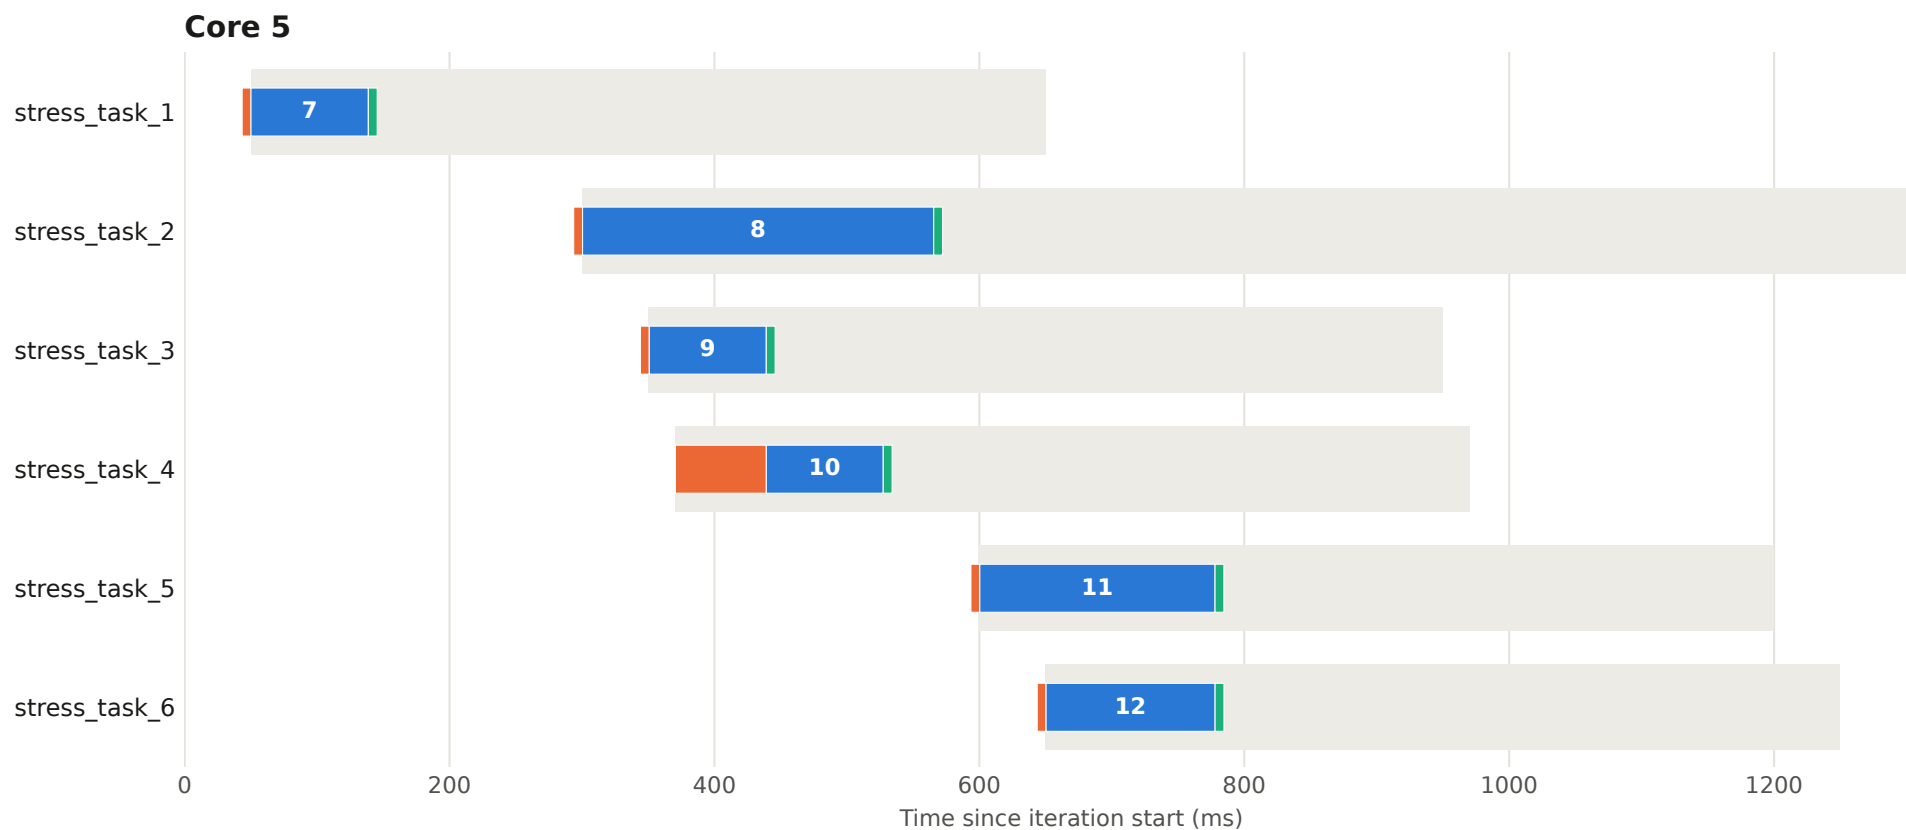


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 46 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

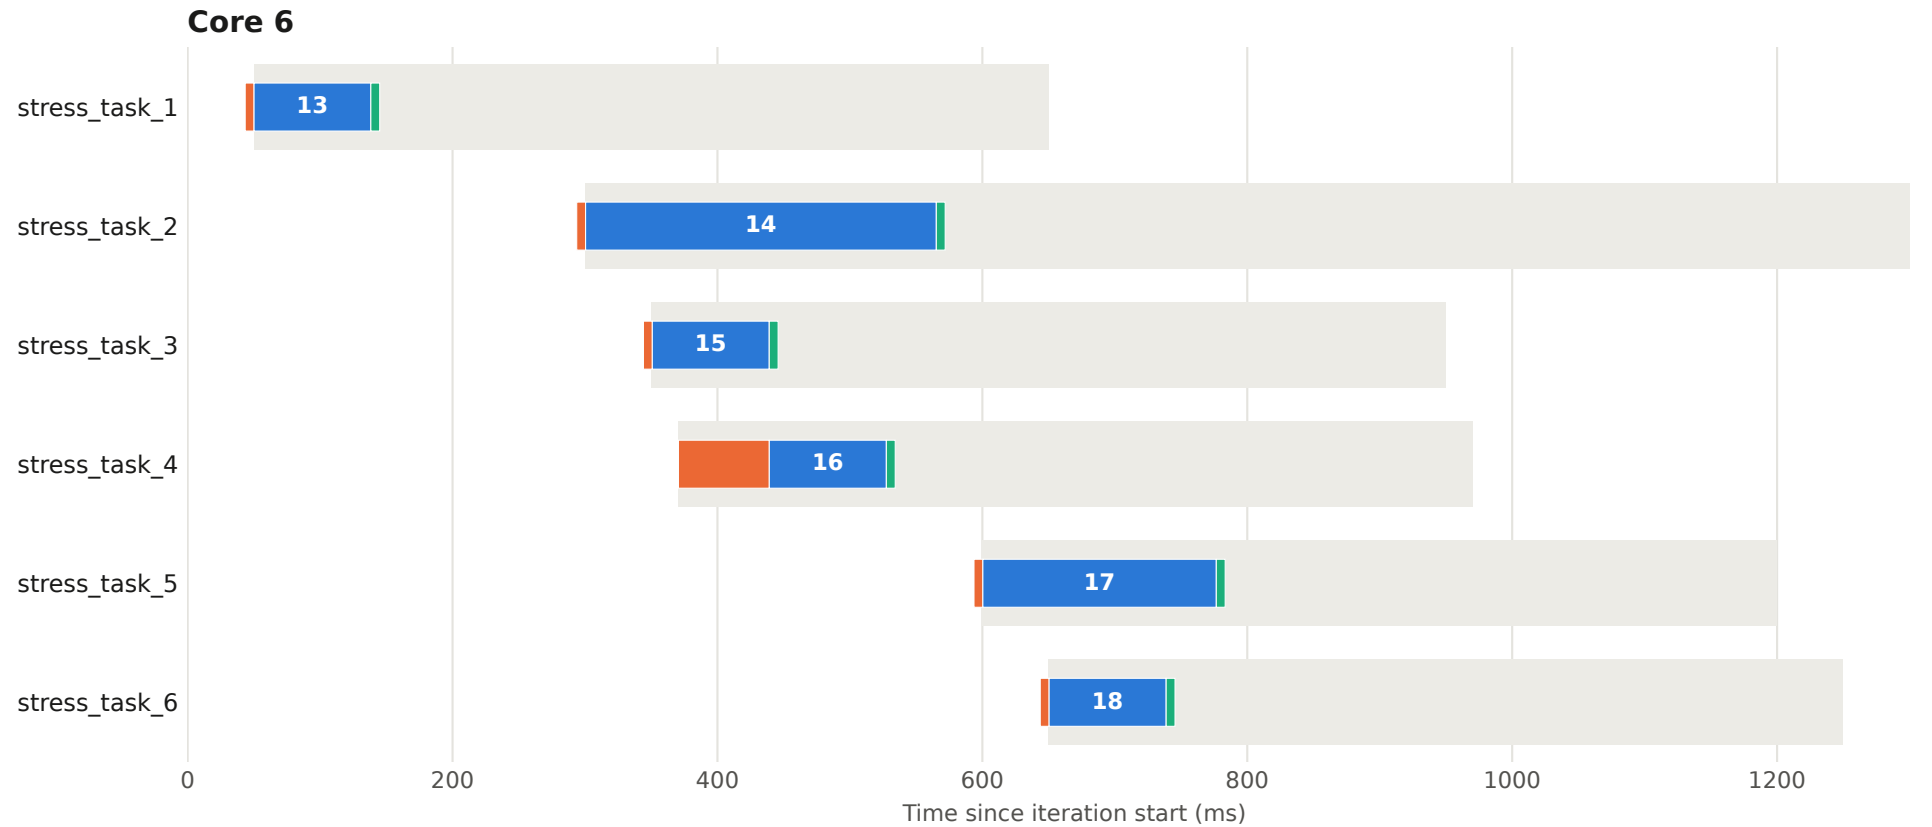


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 46 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

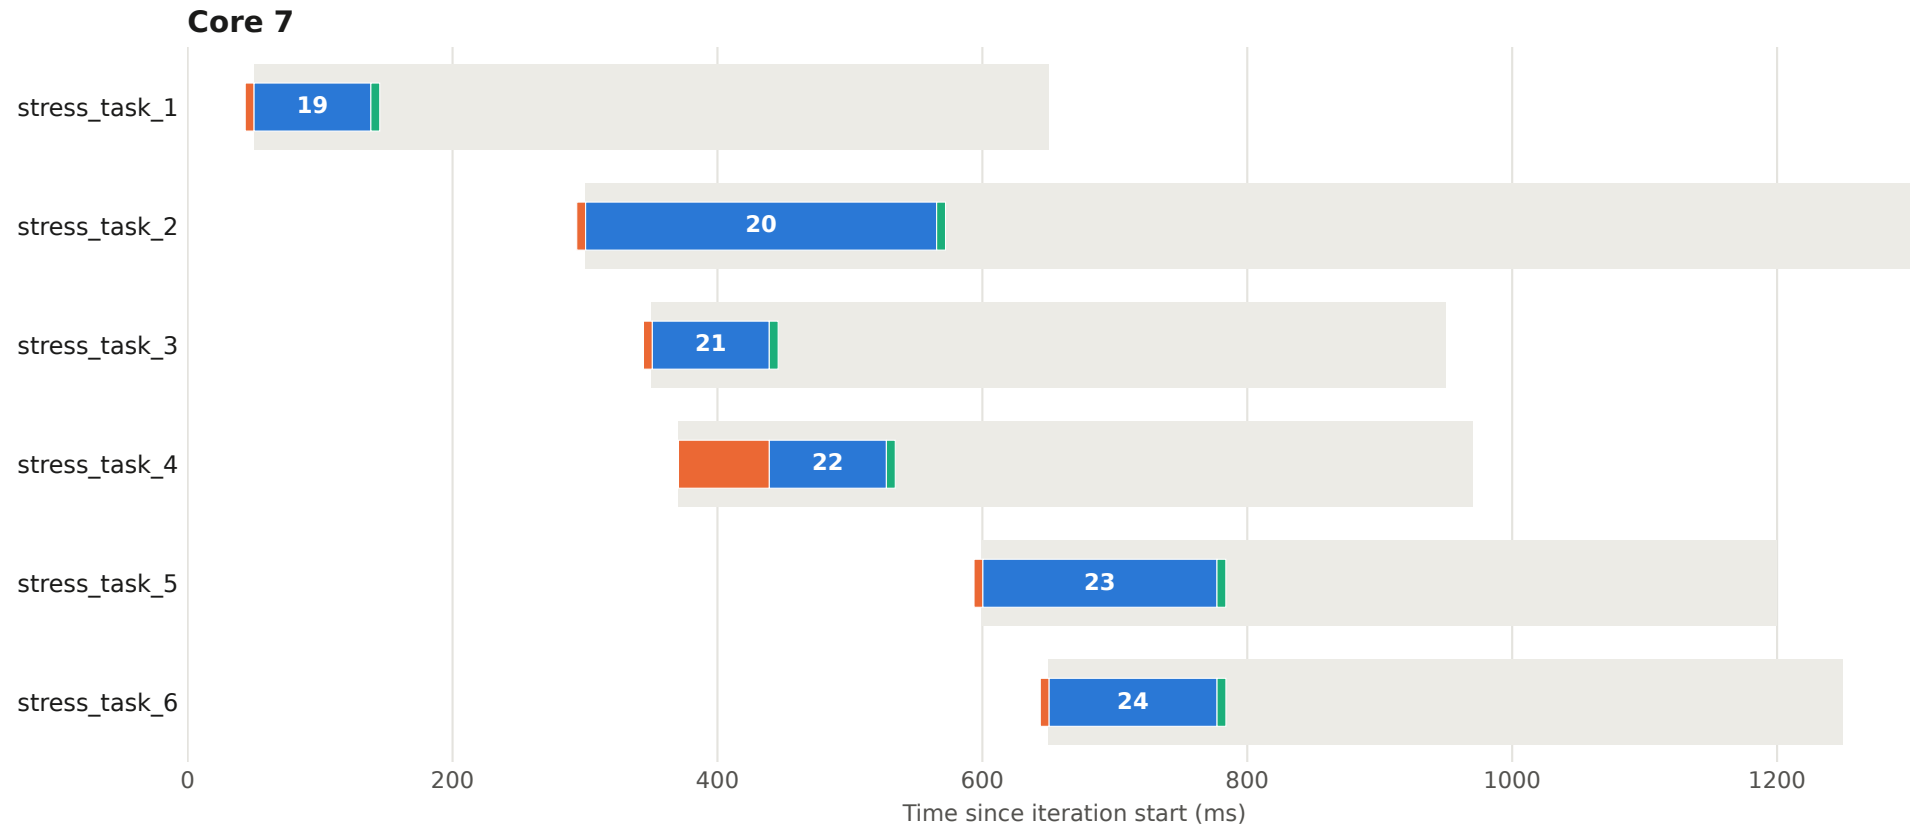


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 47 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

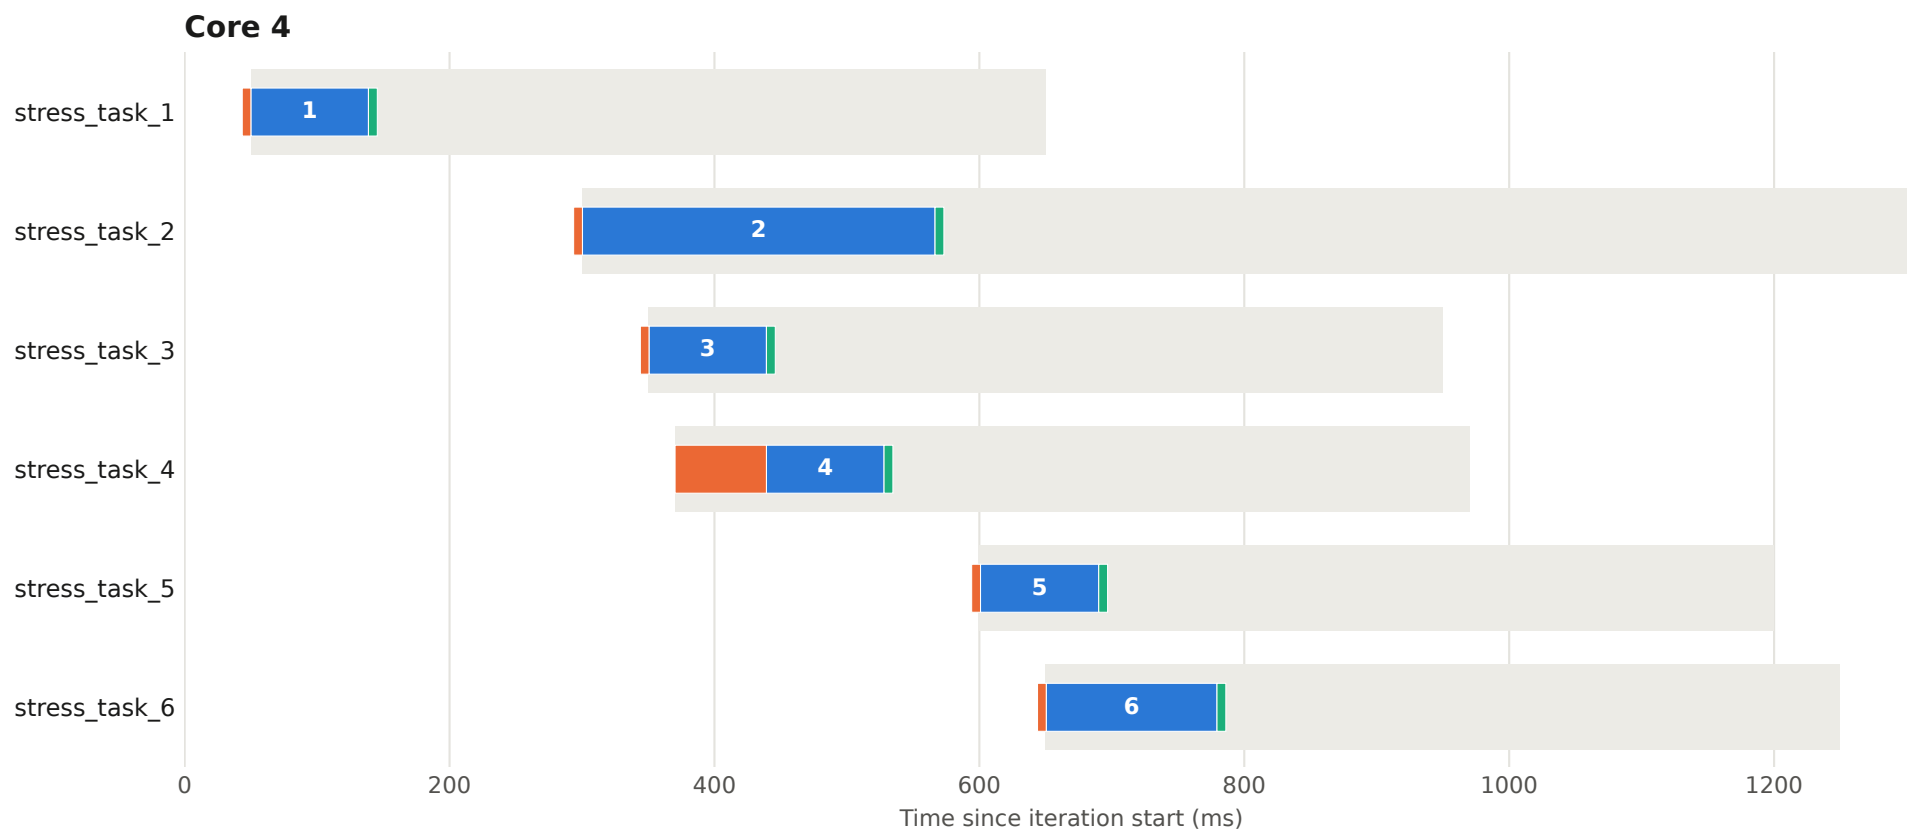


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 47 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

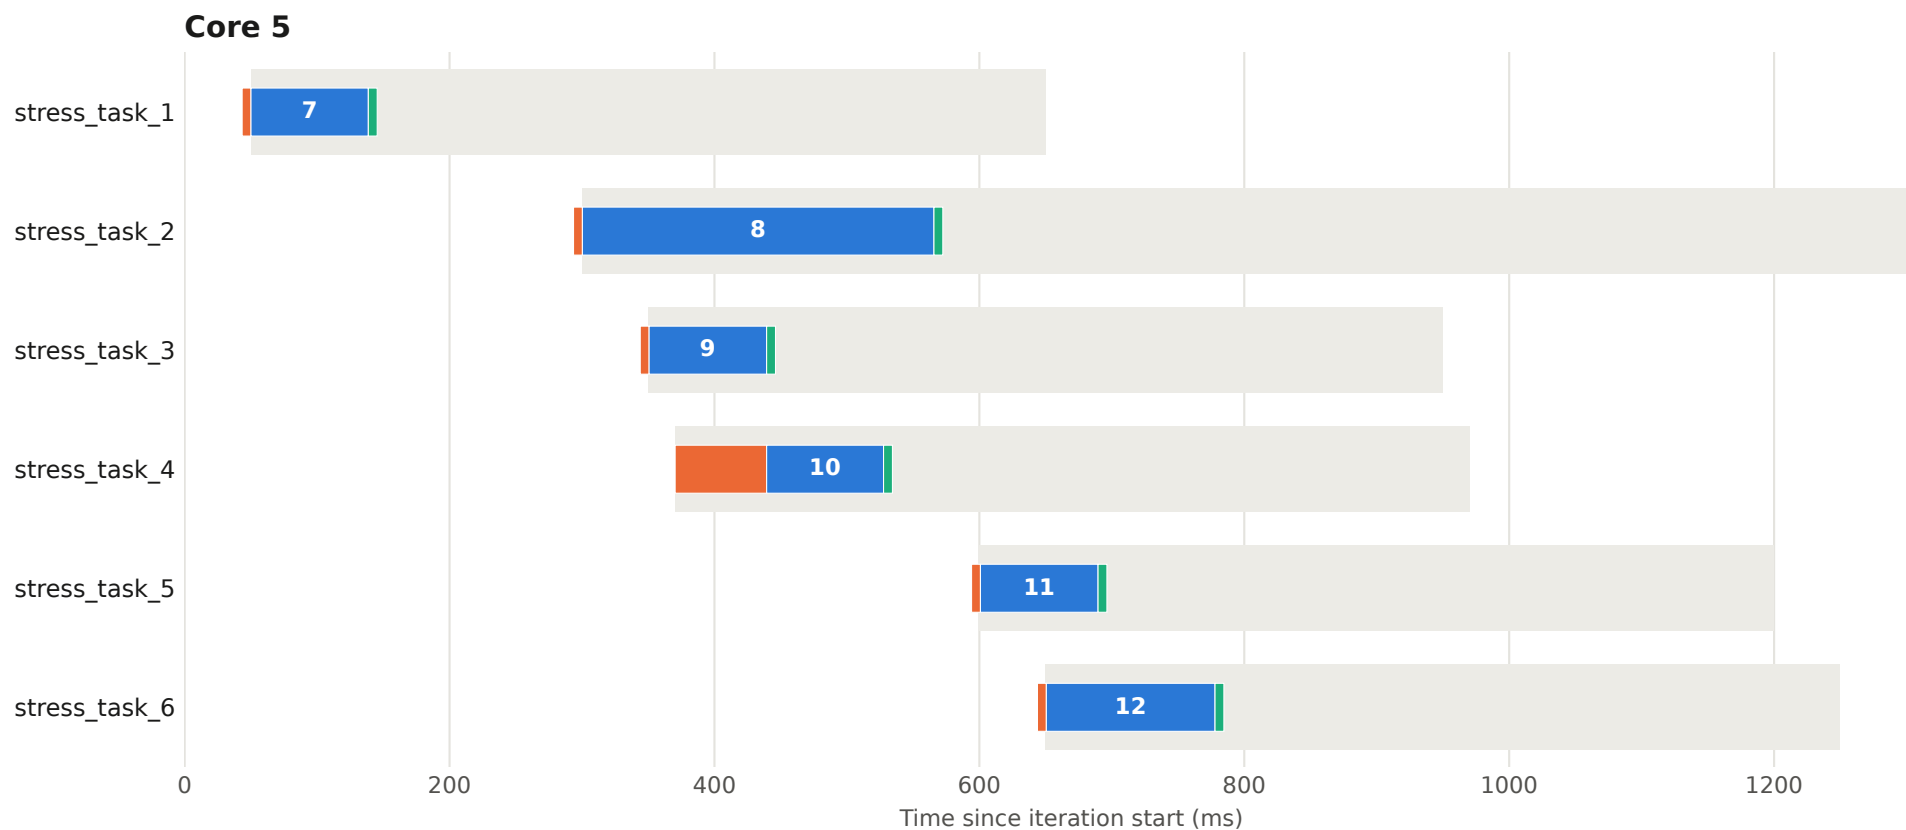


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 47 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

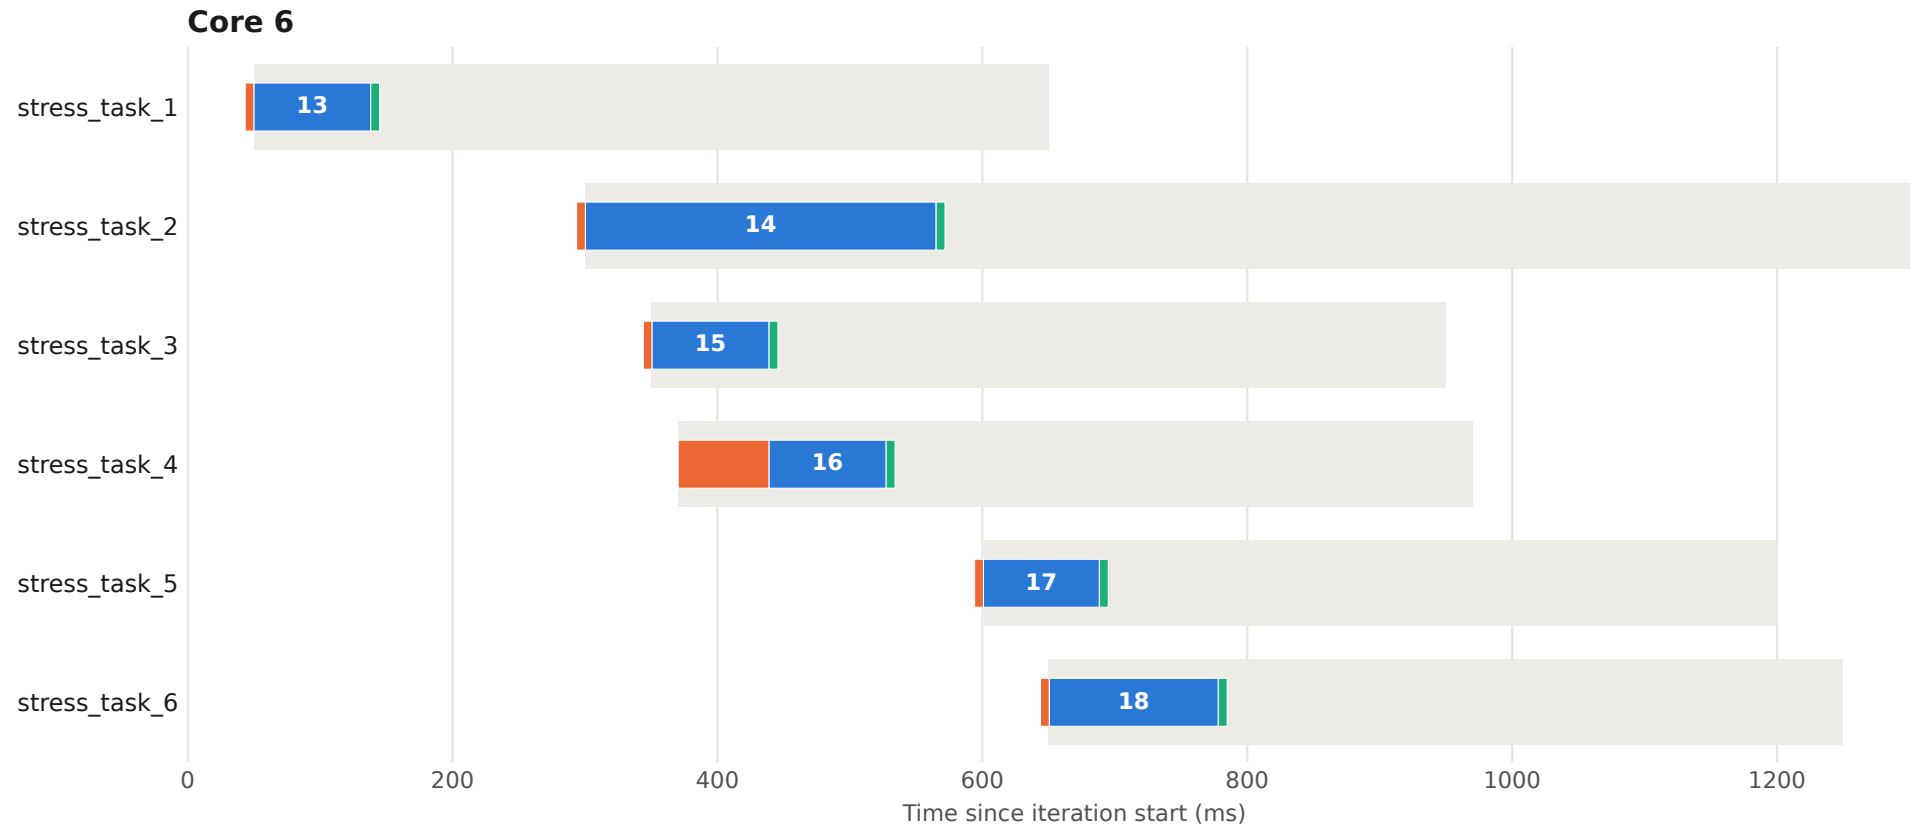


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 47 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

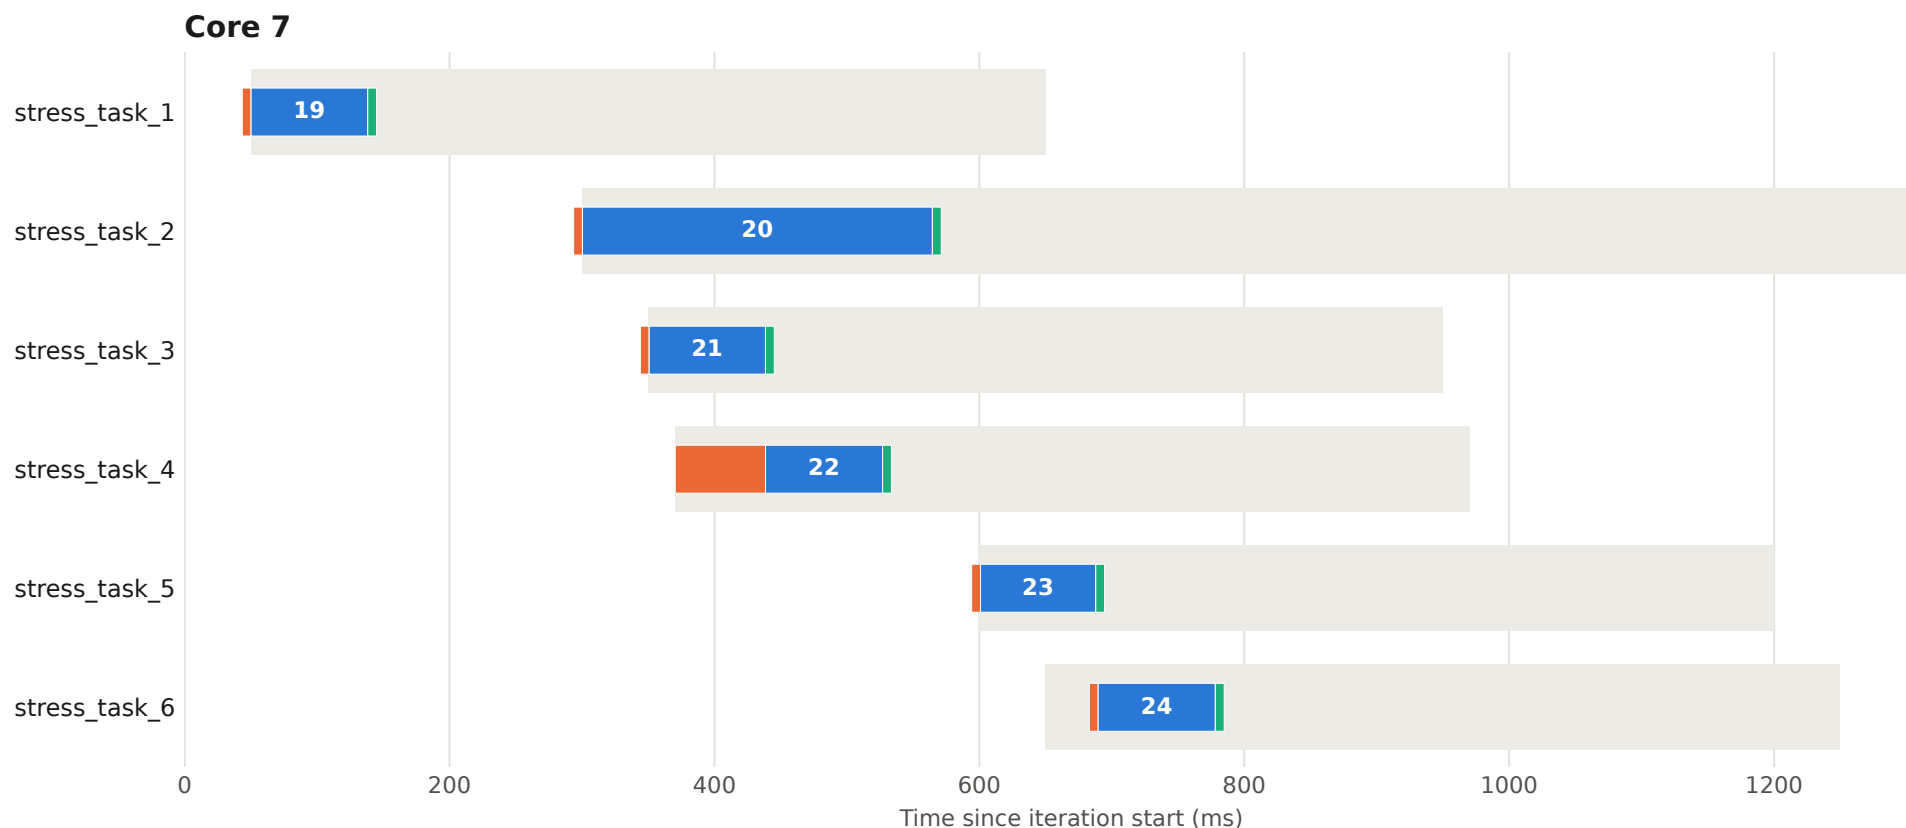


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 48 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

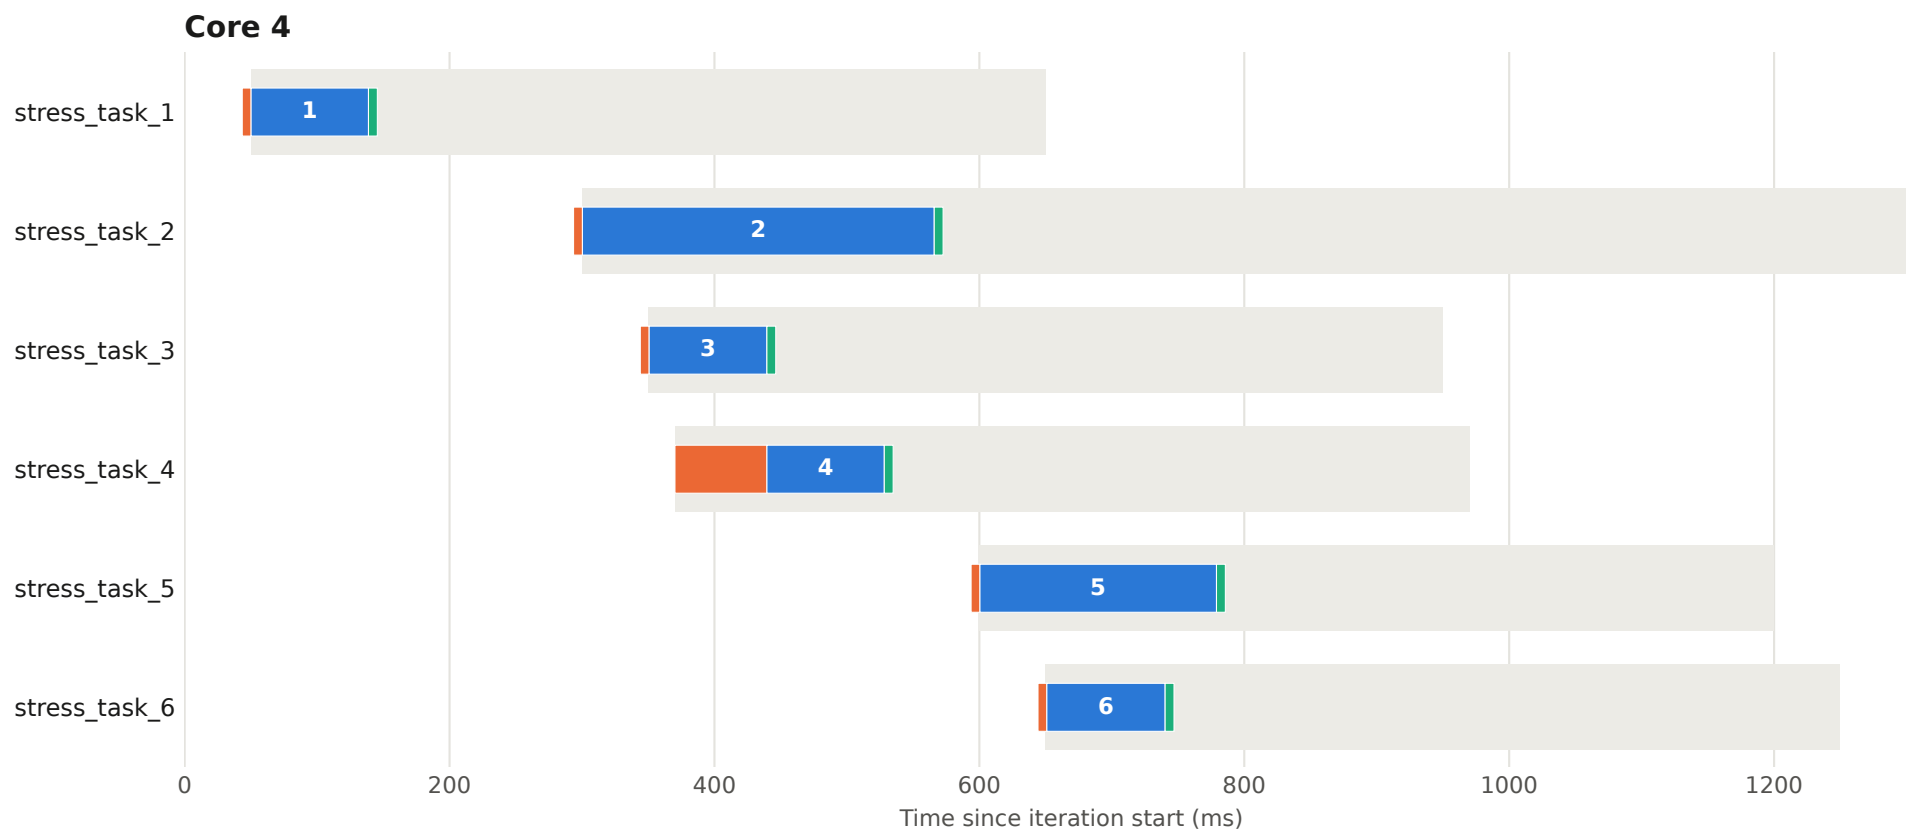


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 48 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

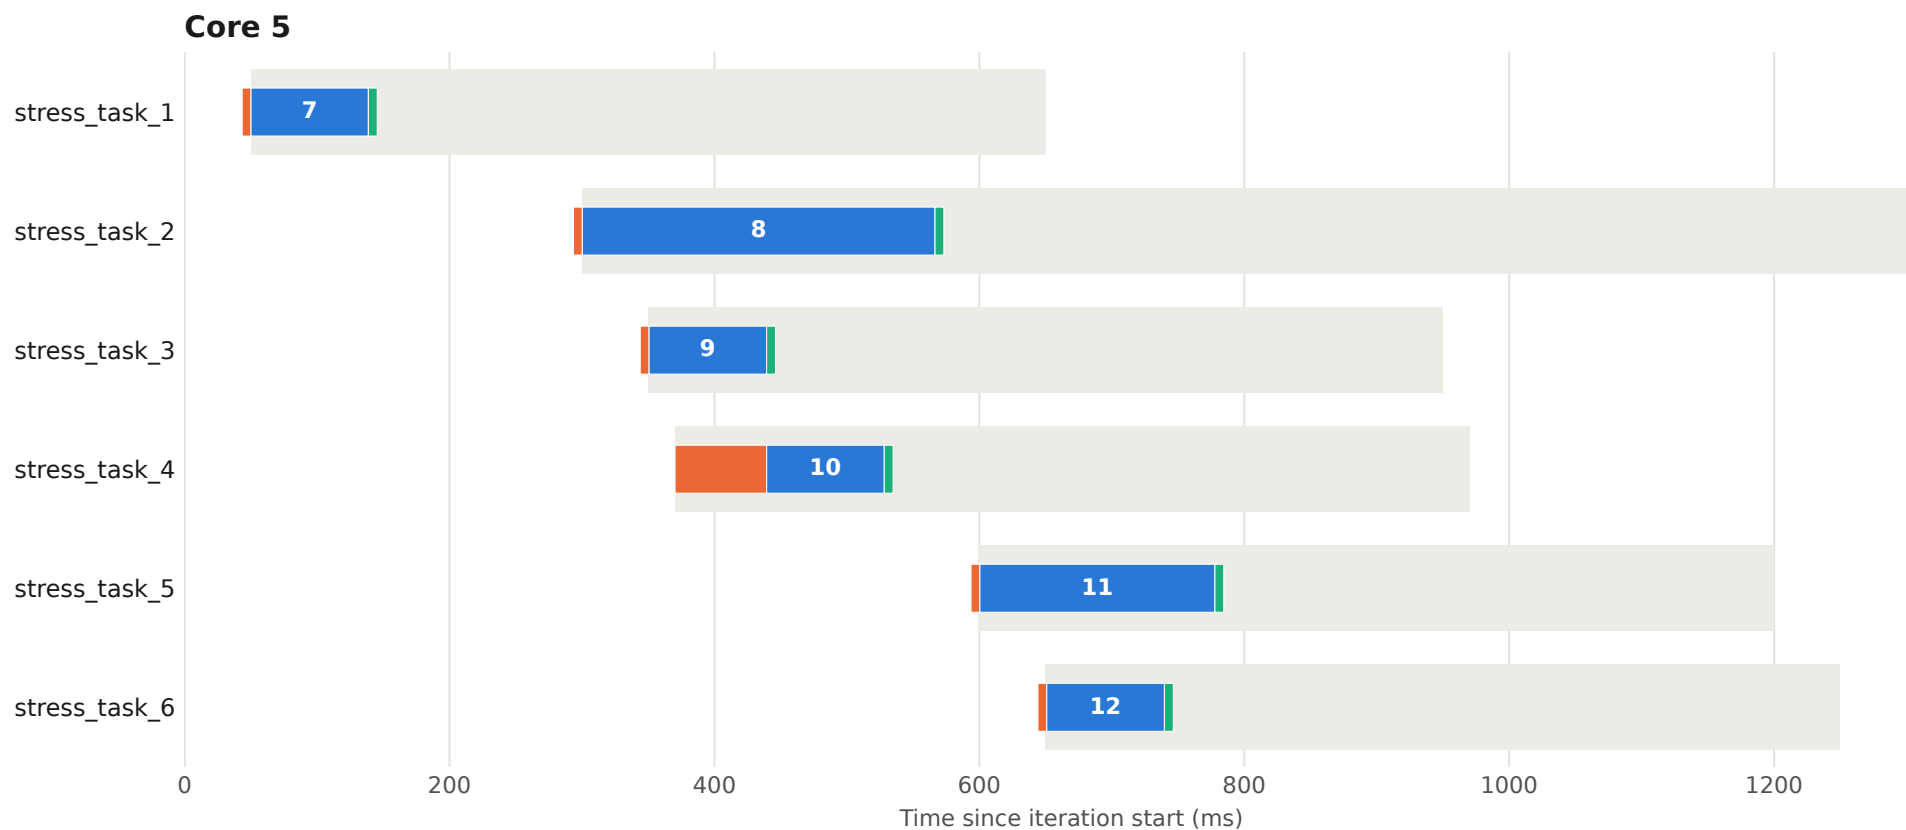


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 48 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

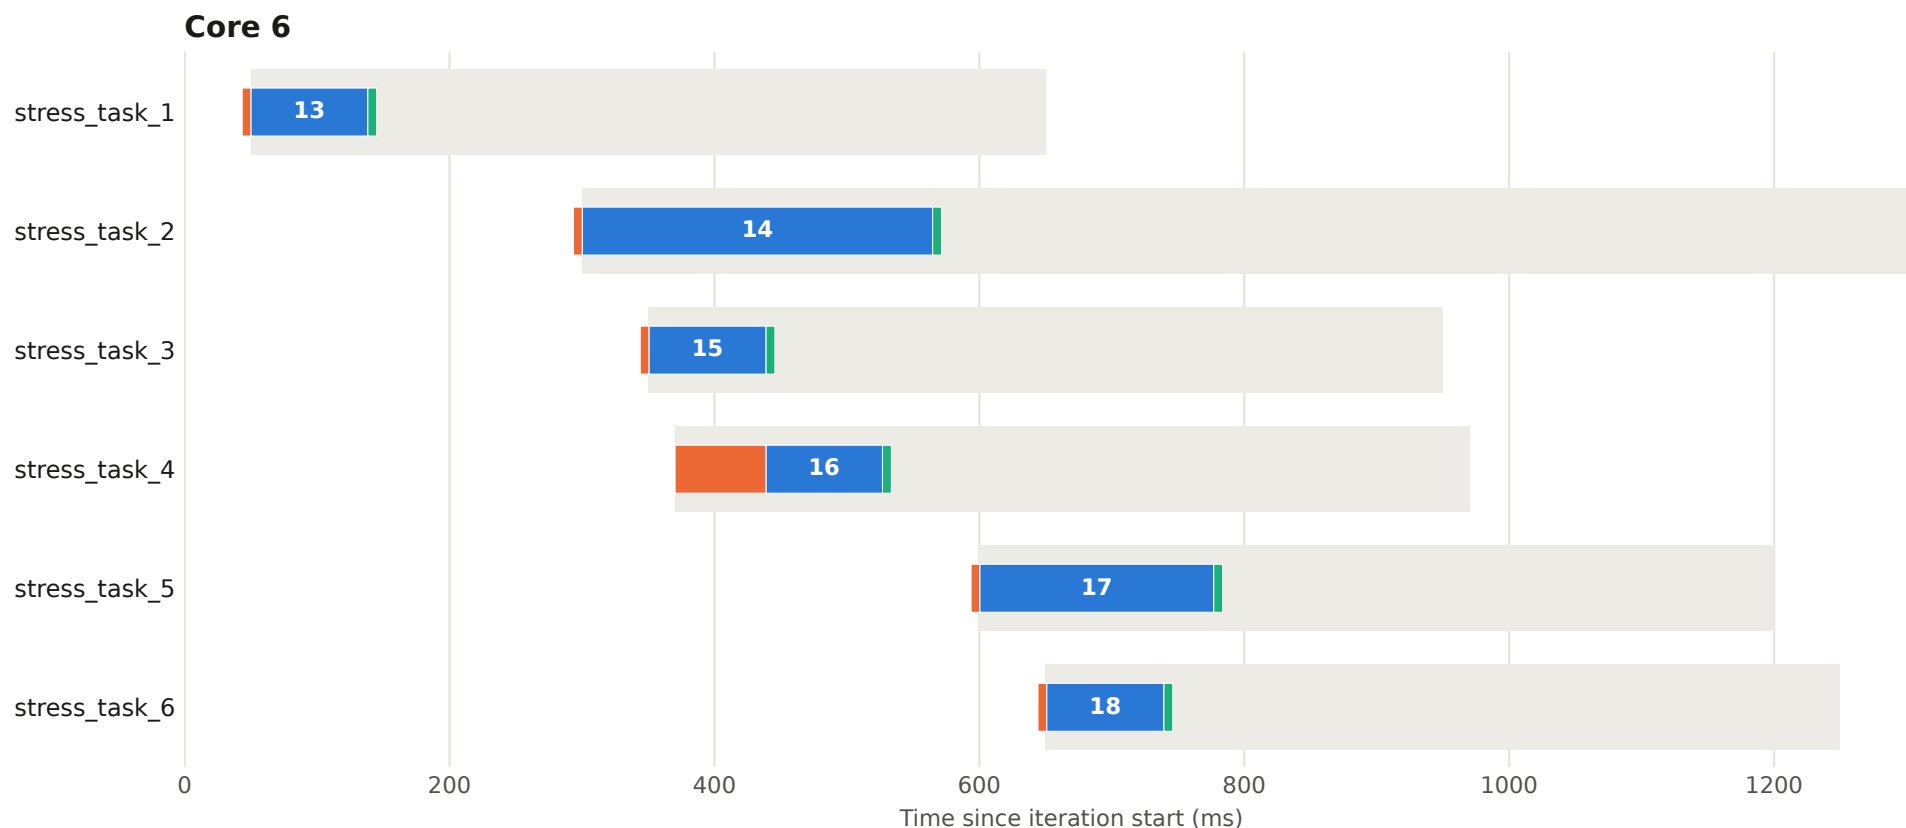


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 48 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

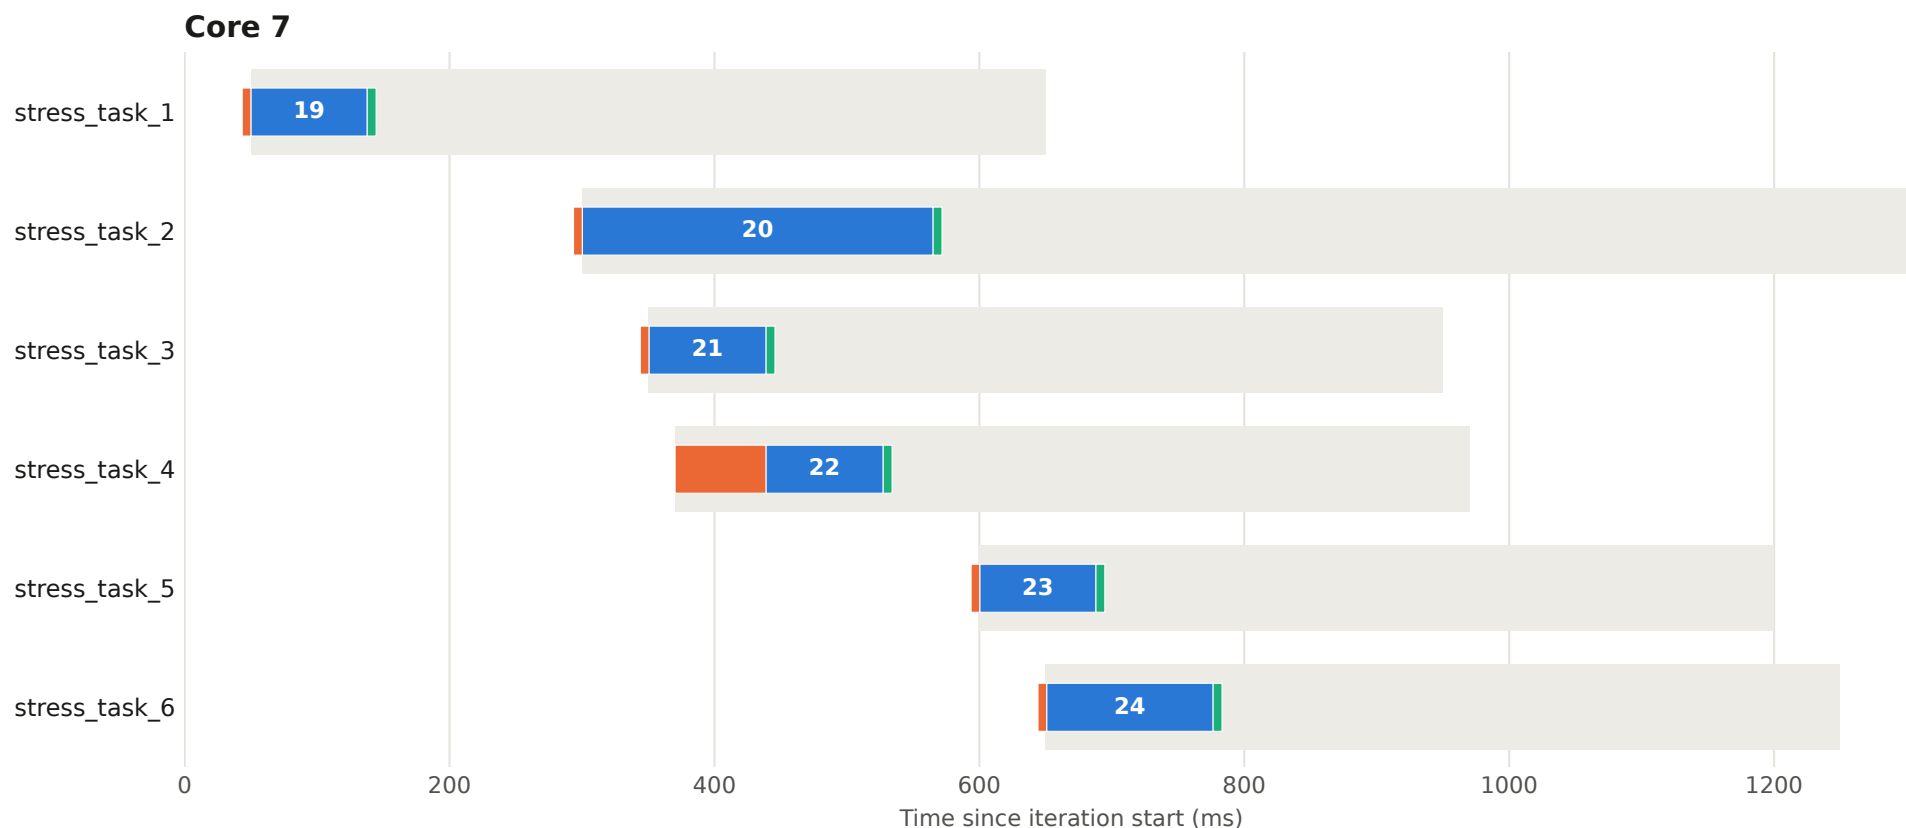


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 49 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

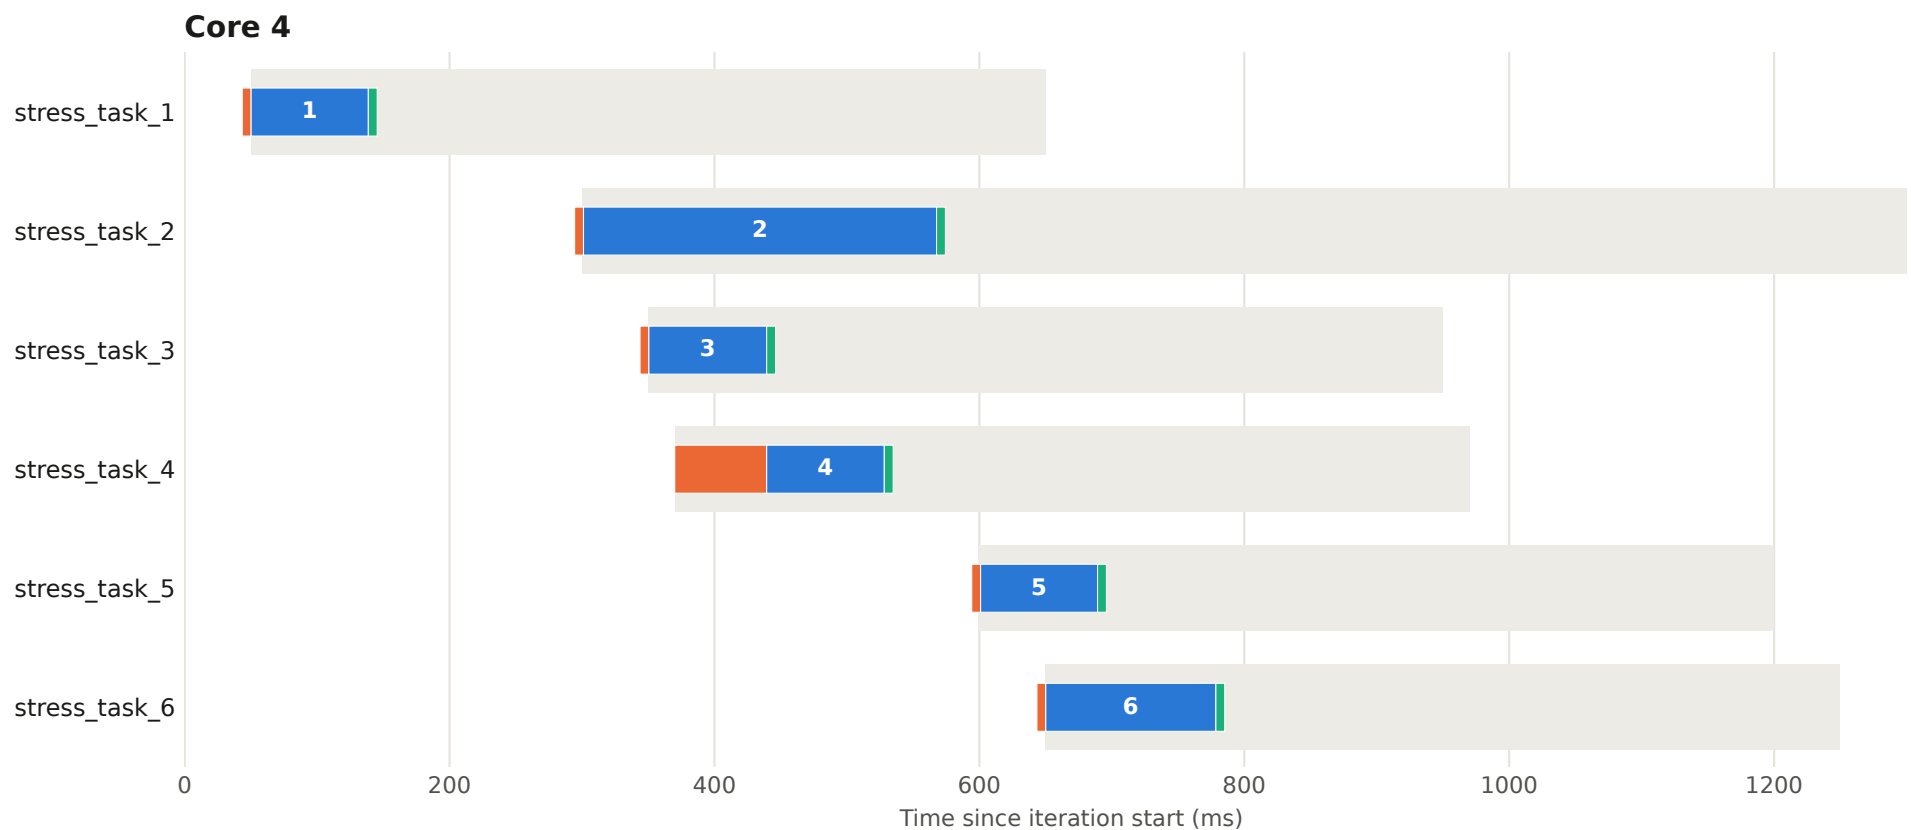


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 49 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

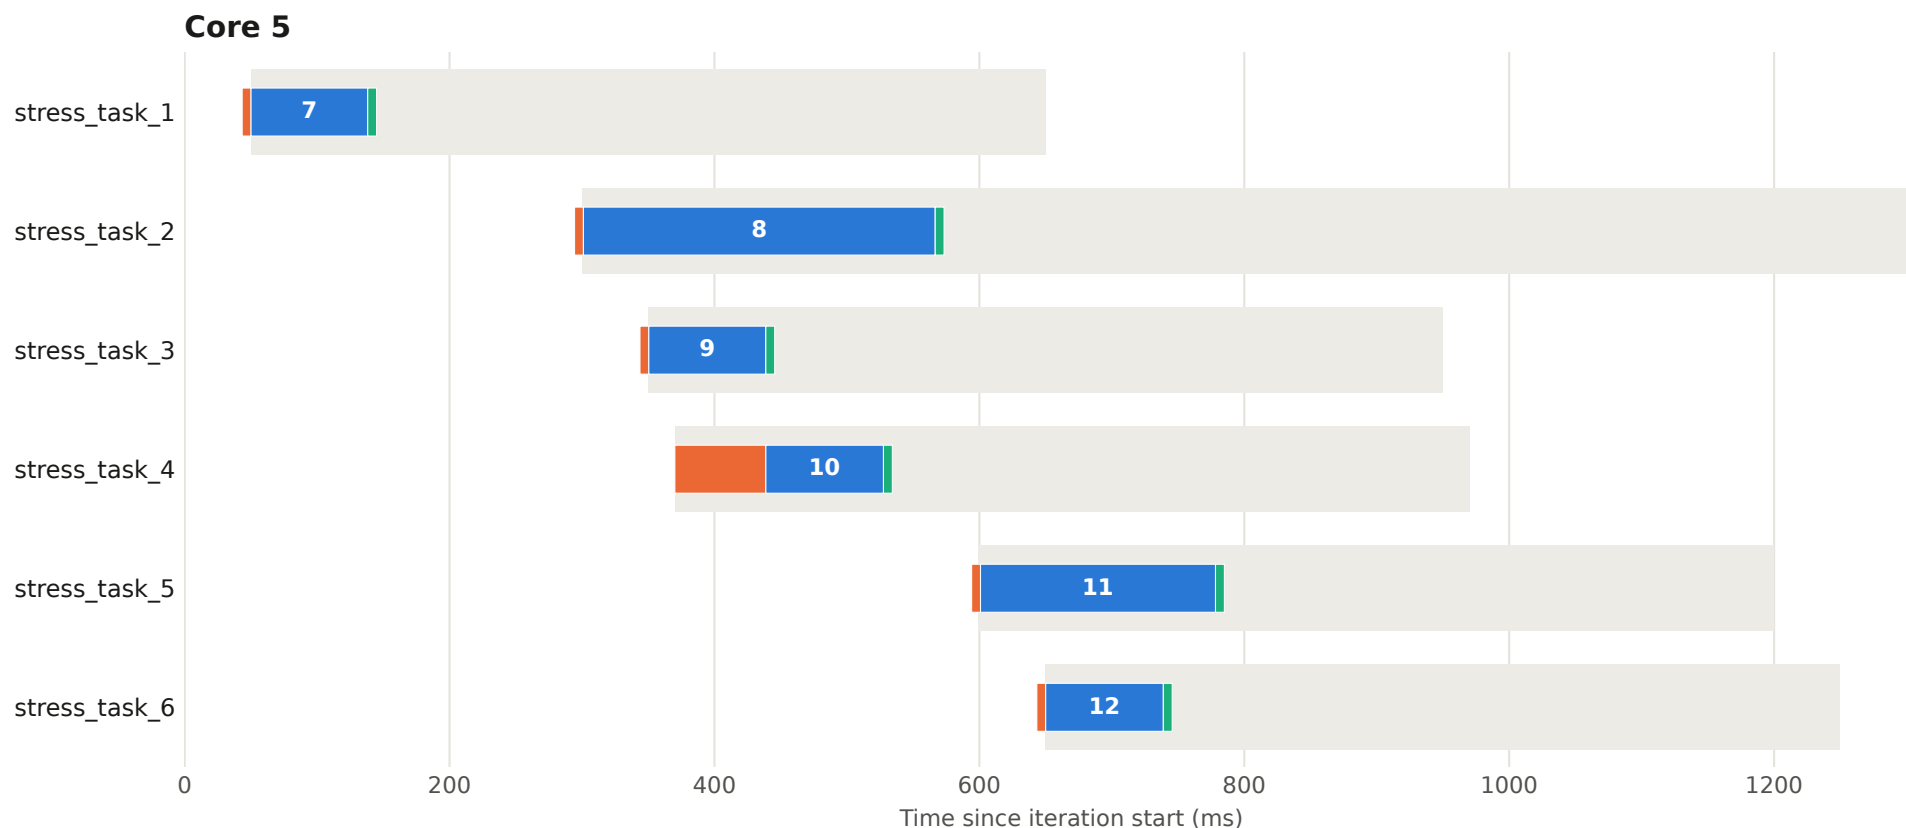


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 49 - core 6

One chart per core; each bar is one task call.


- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

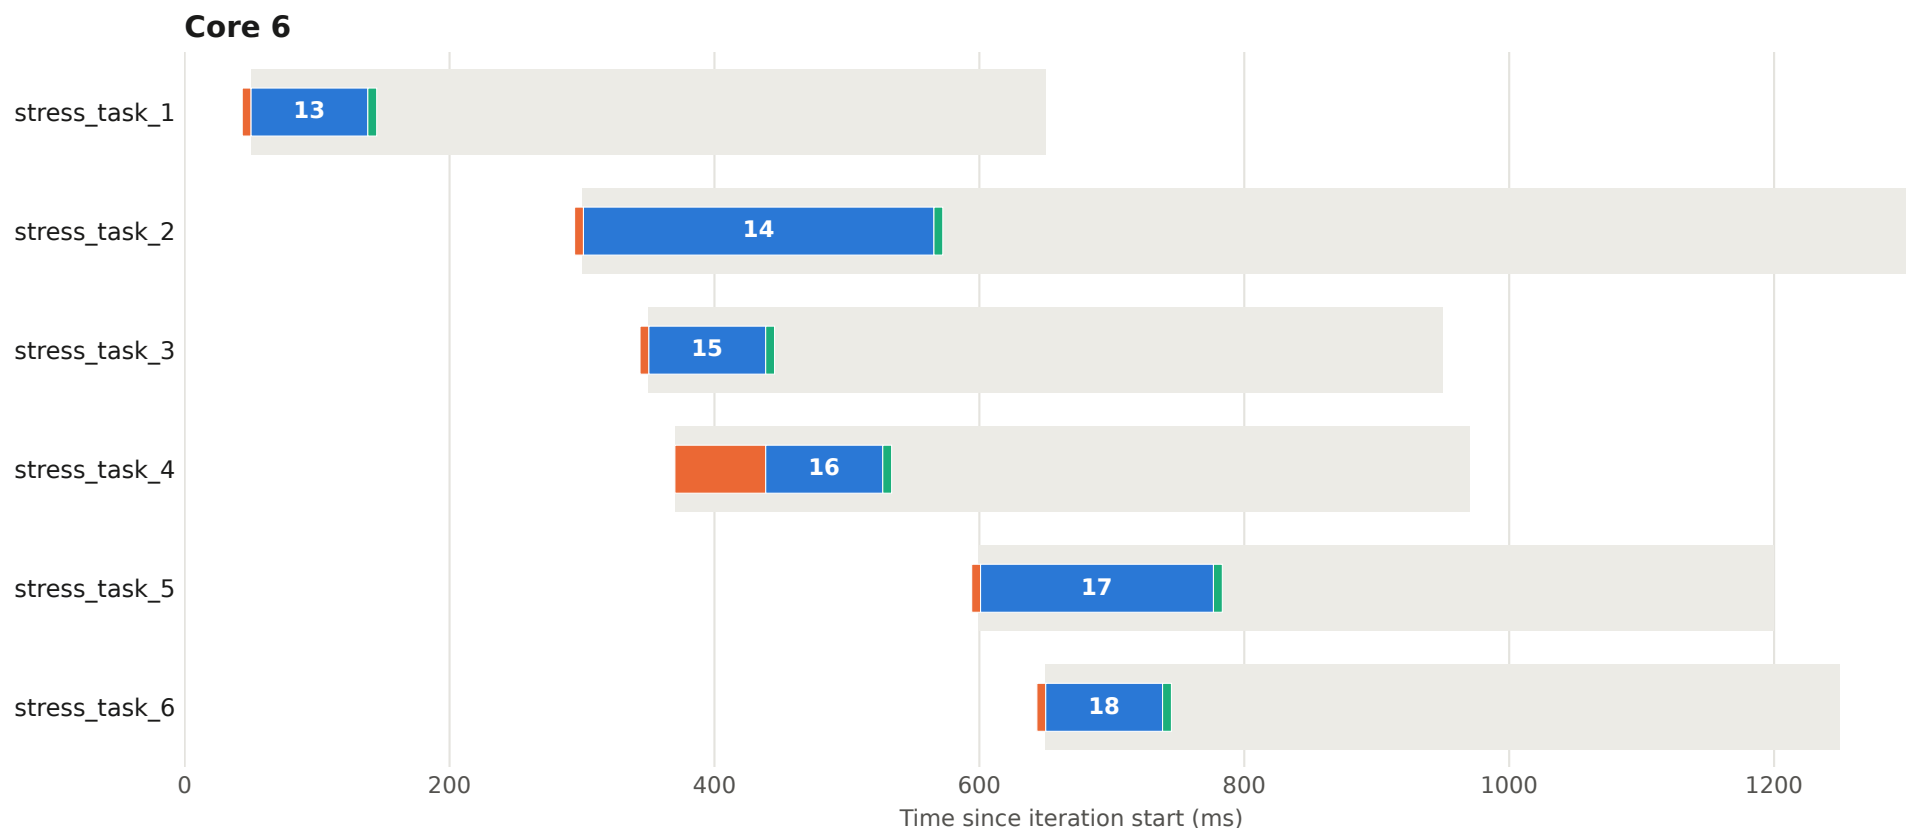

# Execution plan - iteration 49 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

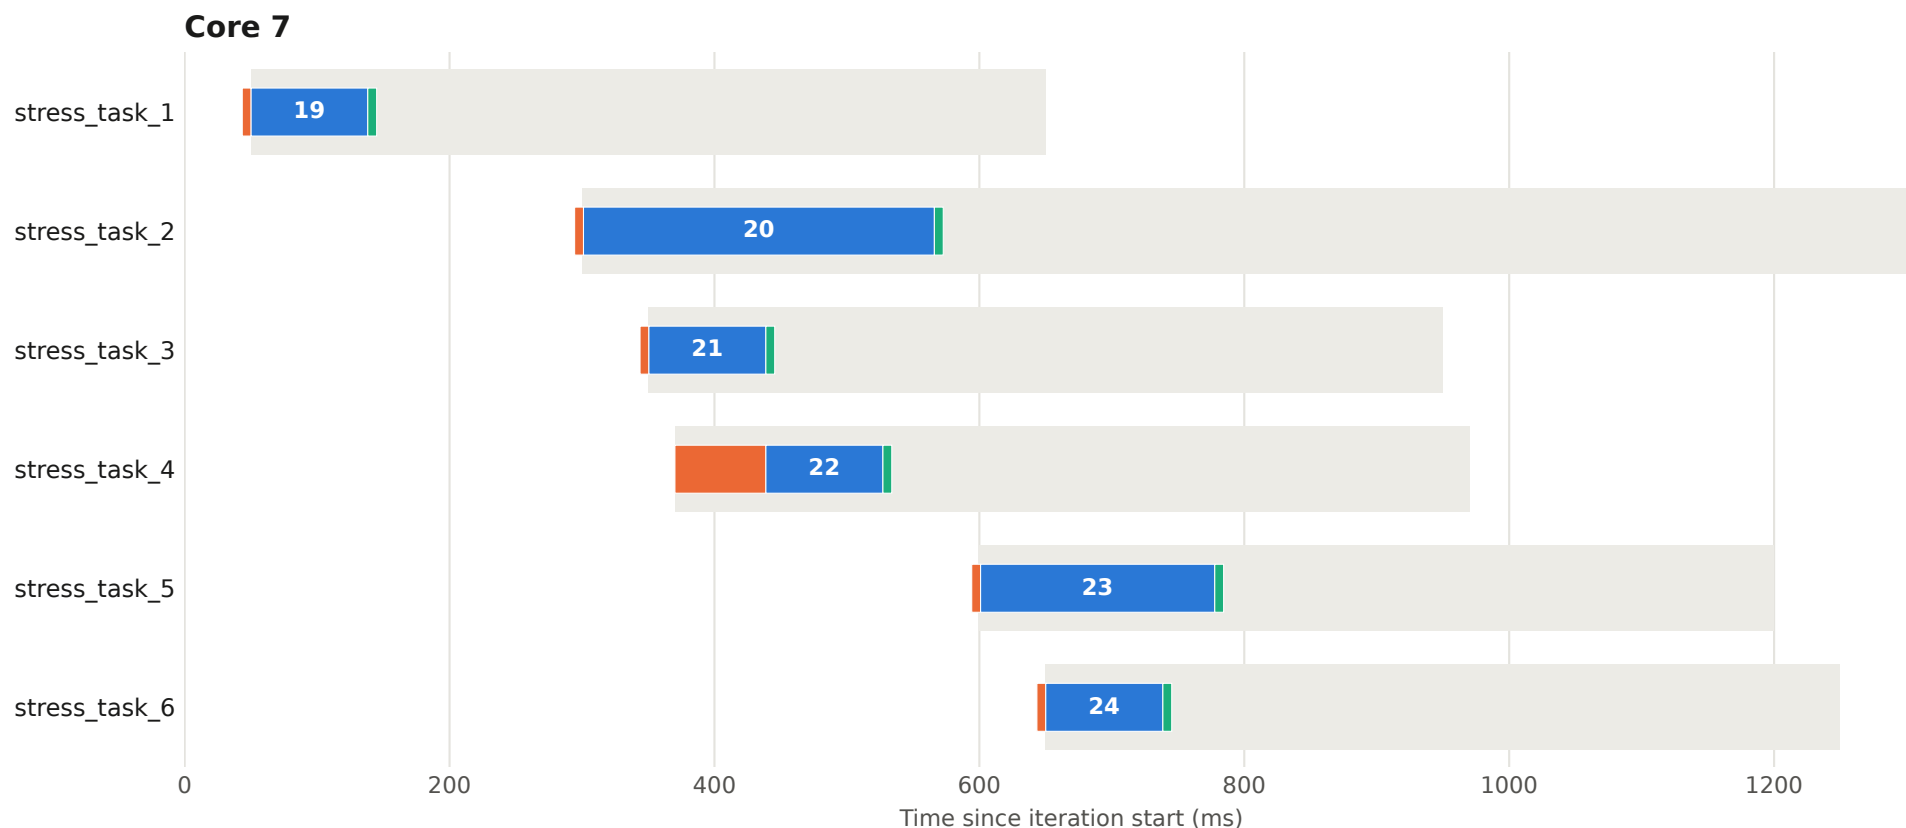


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 50 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

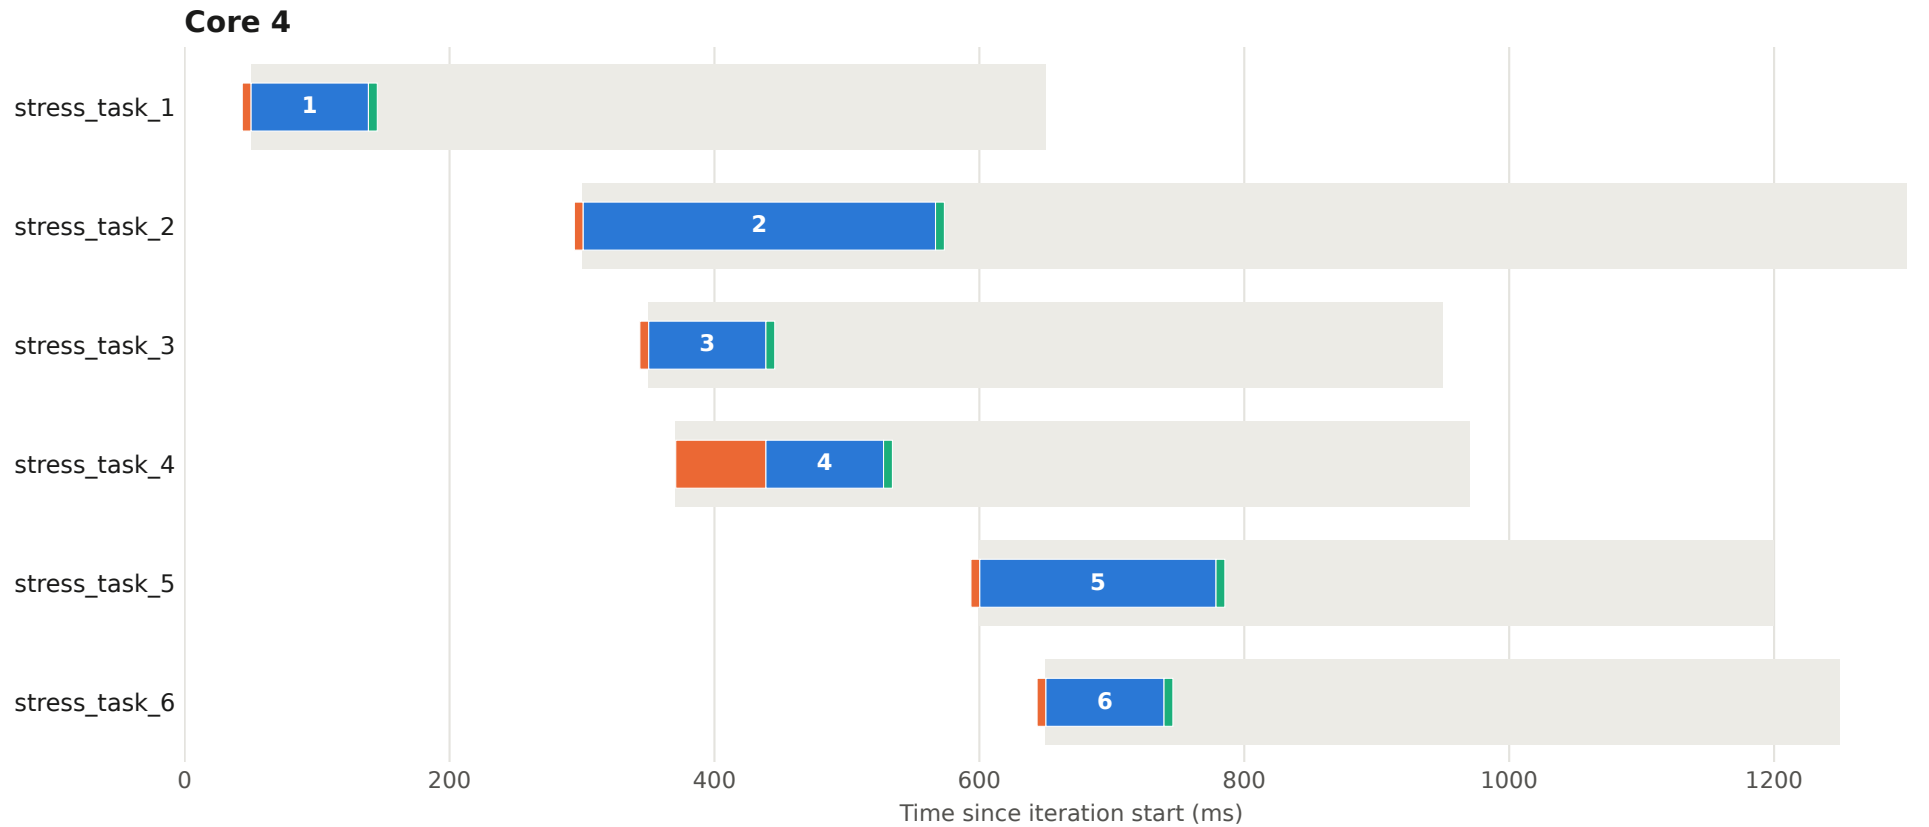


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 50 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

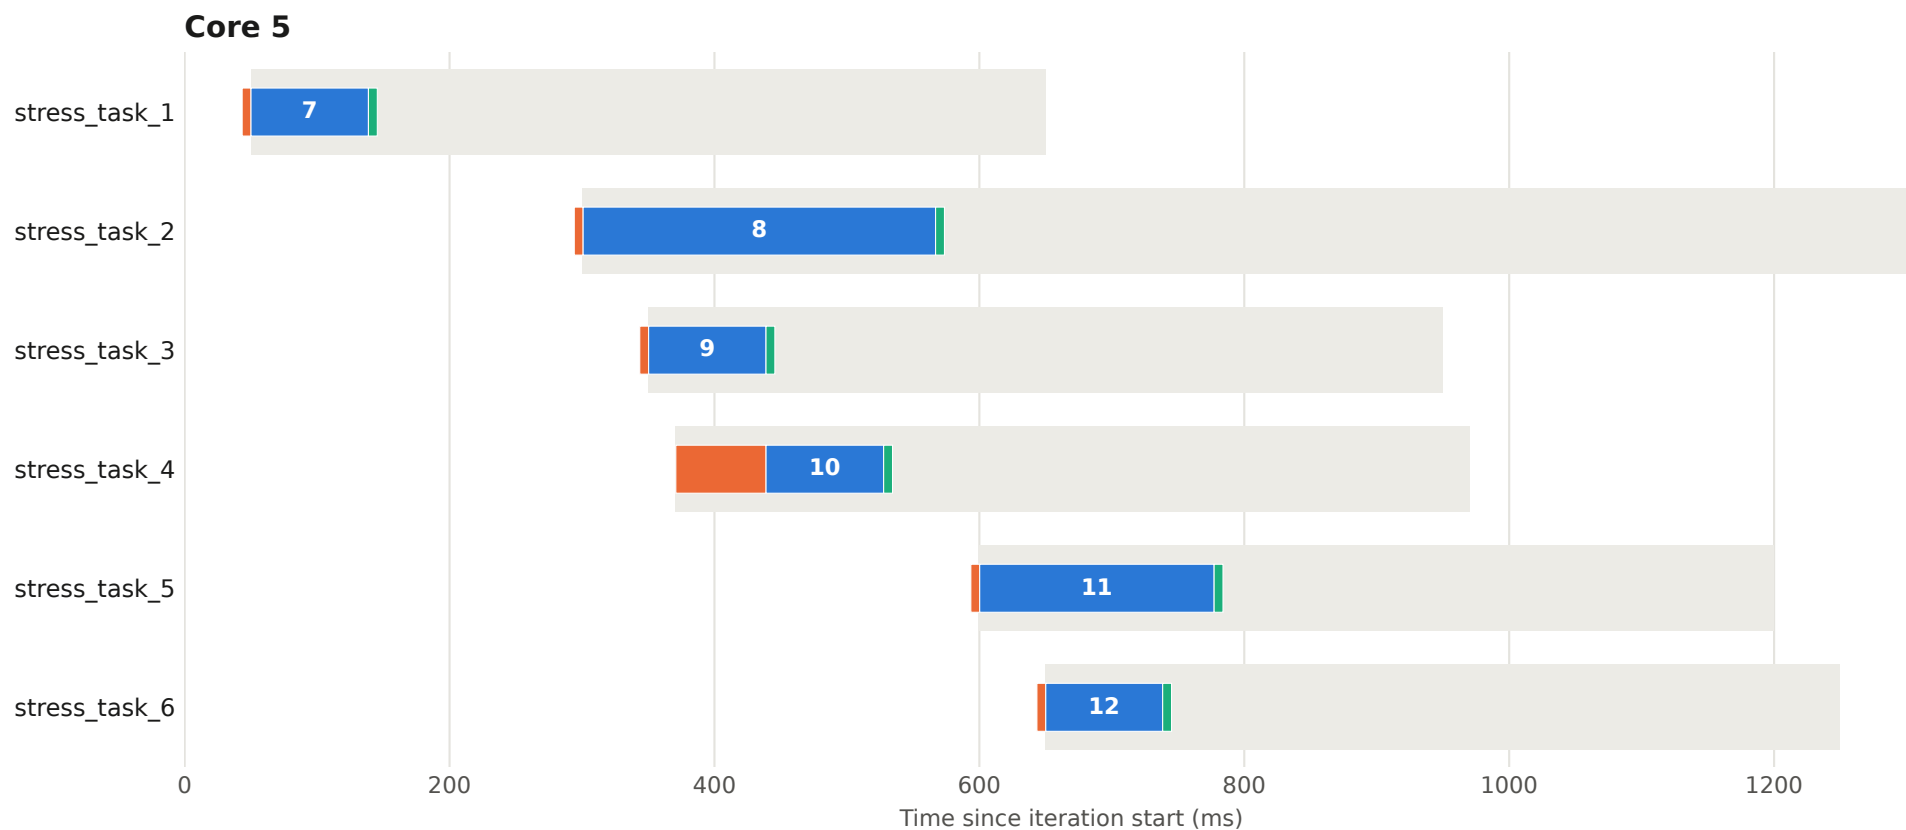


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 50 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

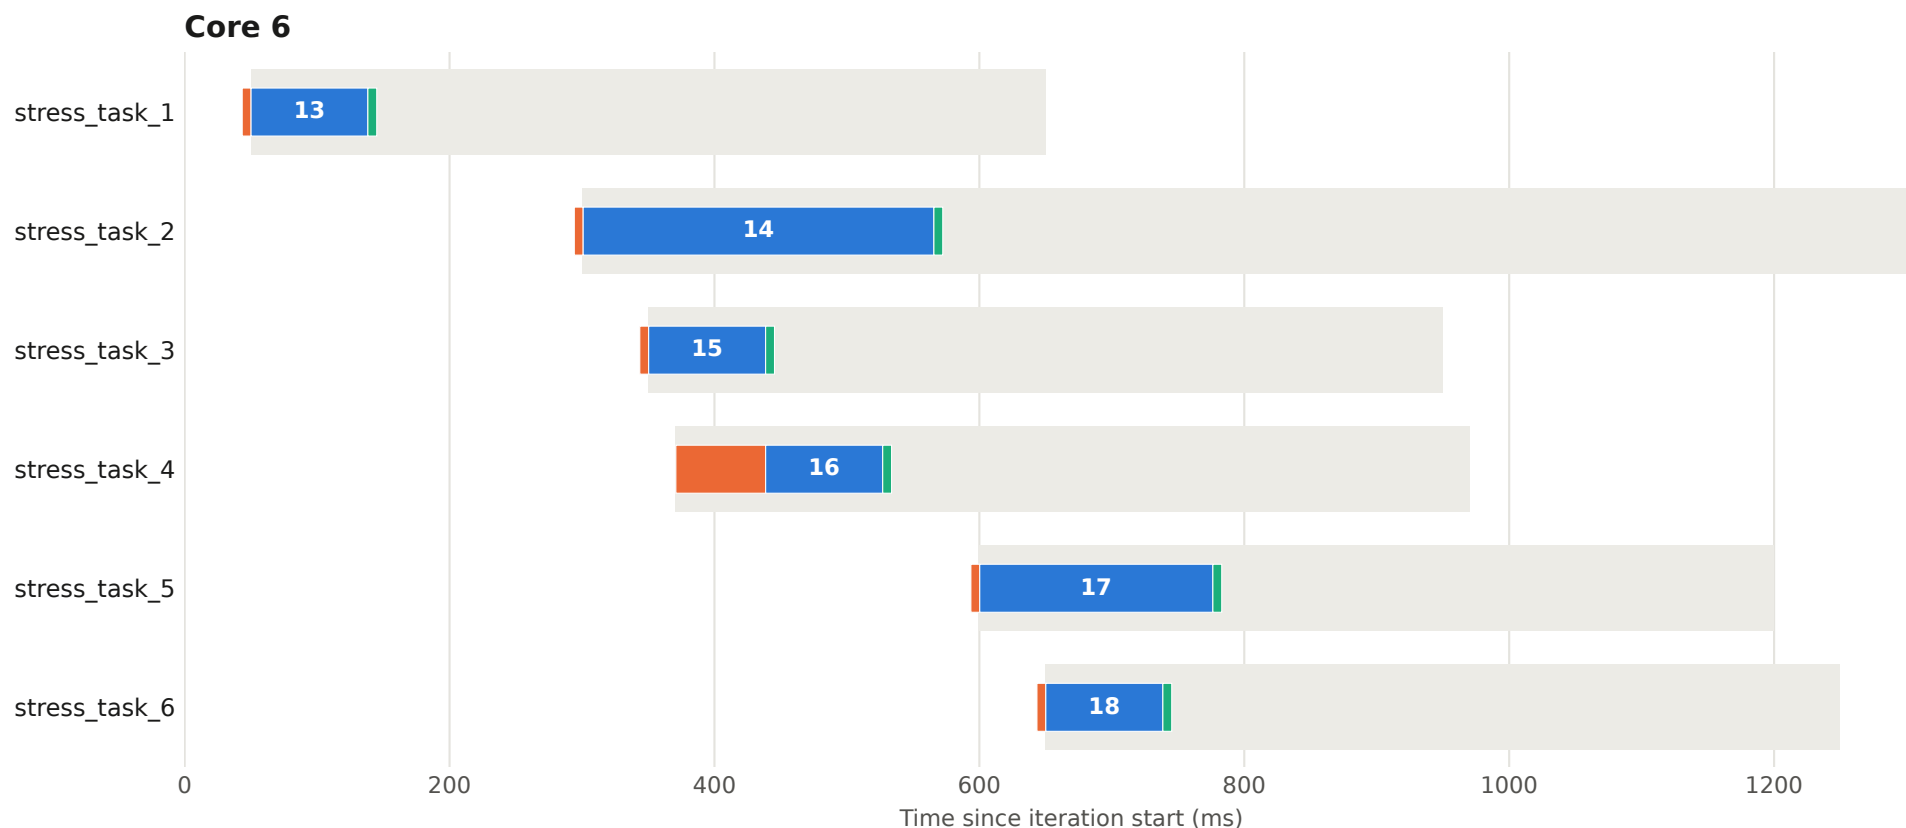


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 50 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

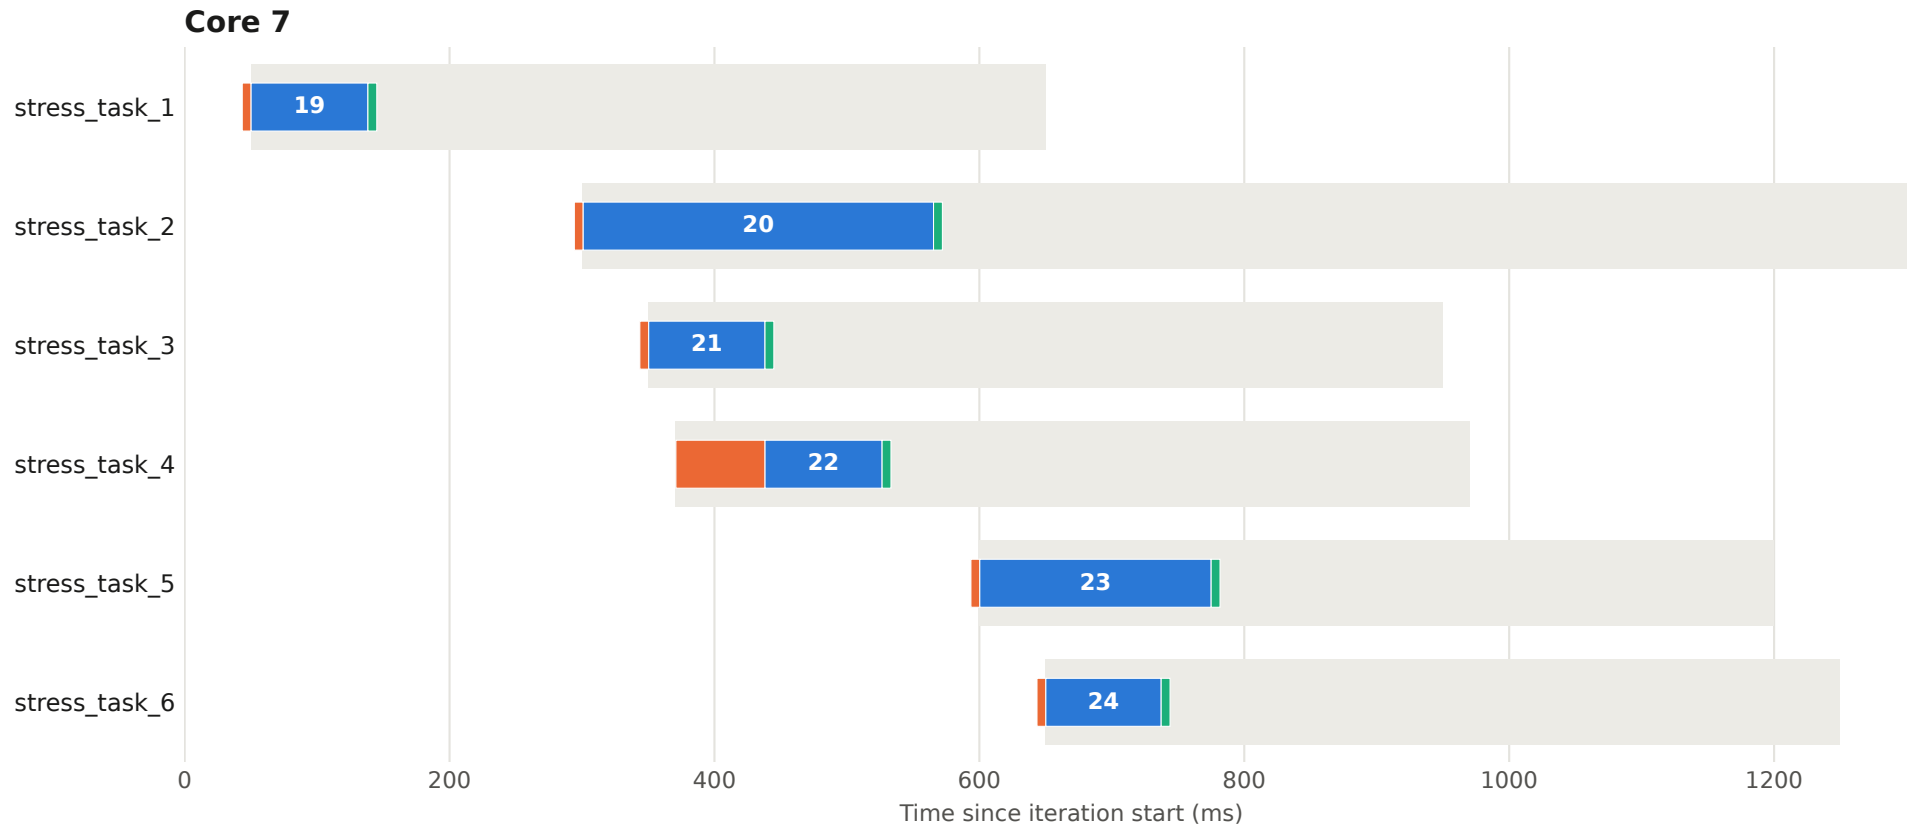


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 51 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

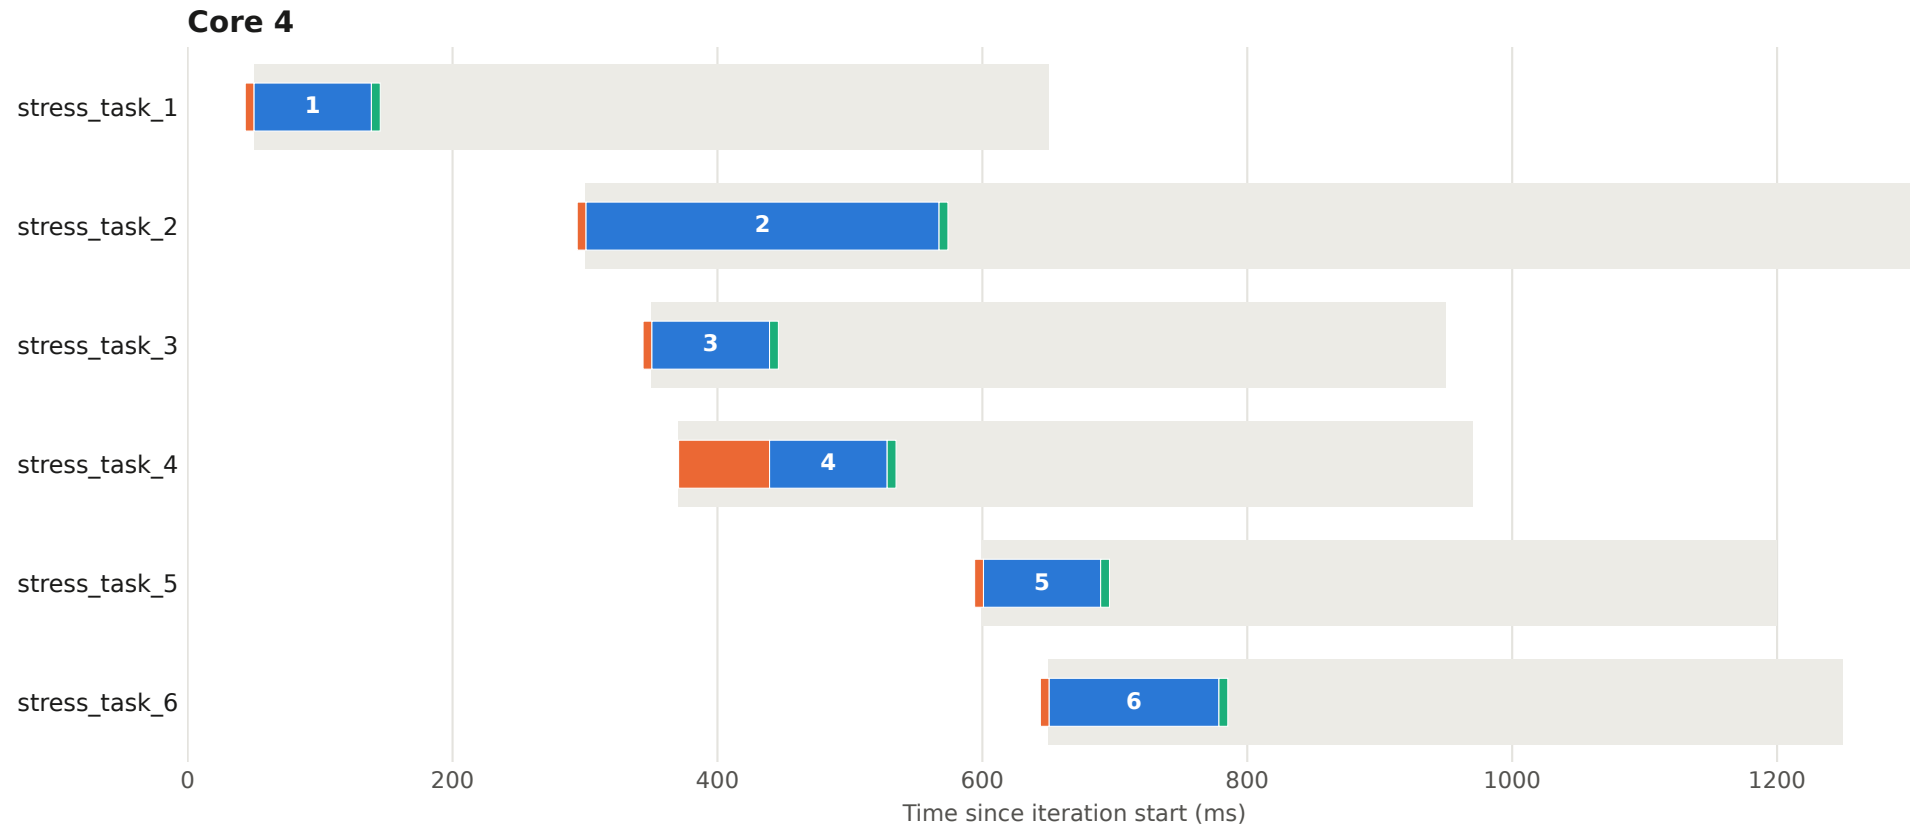


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 51 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

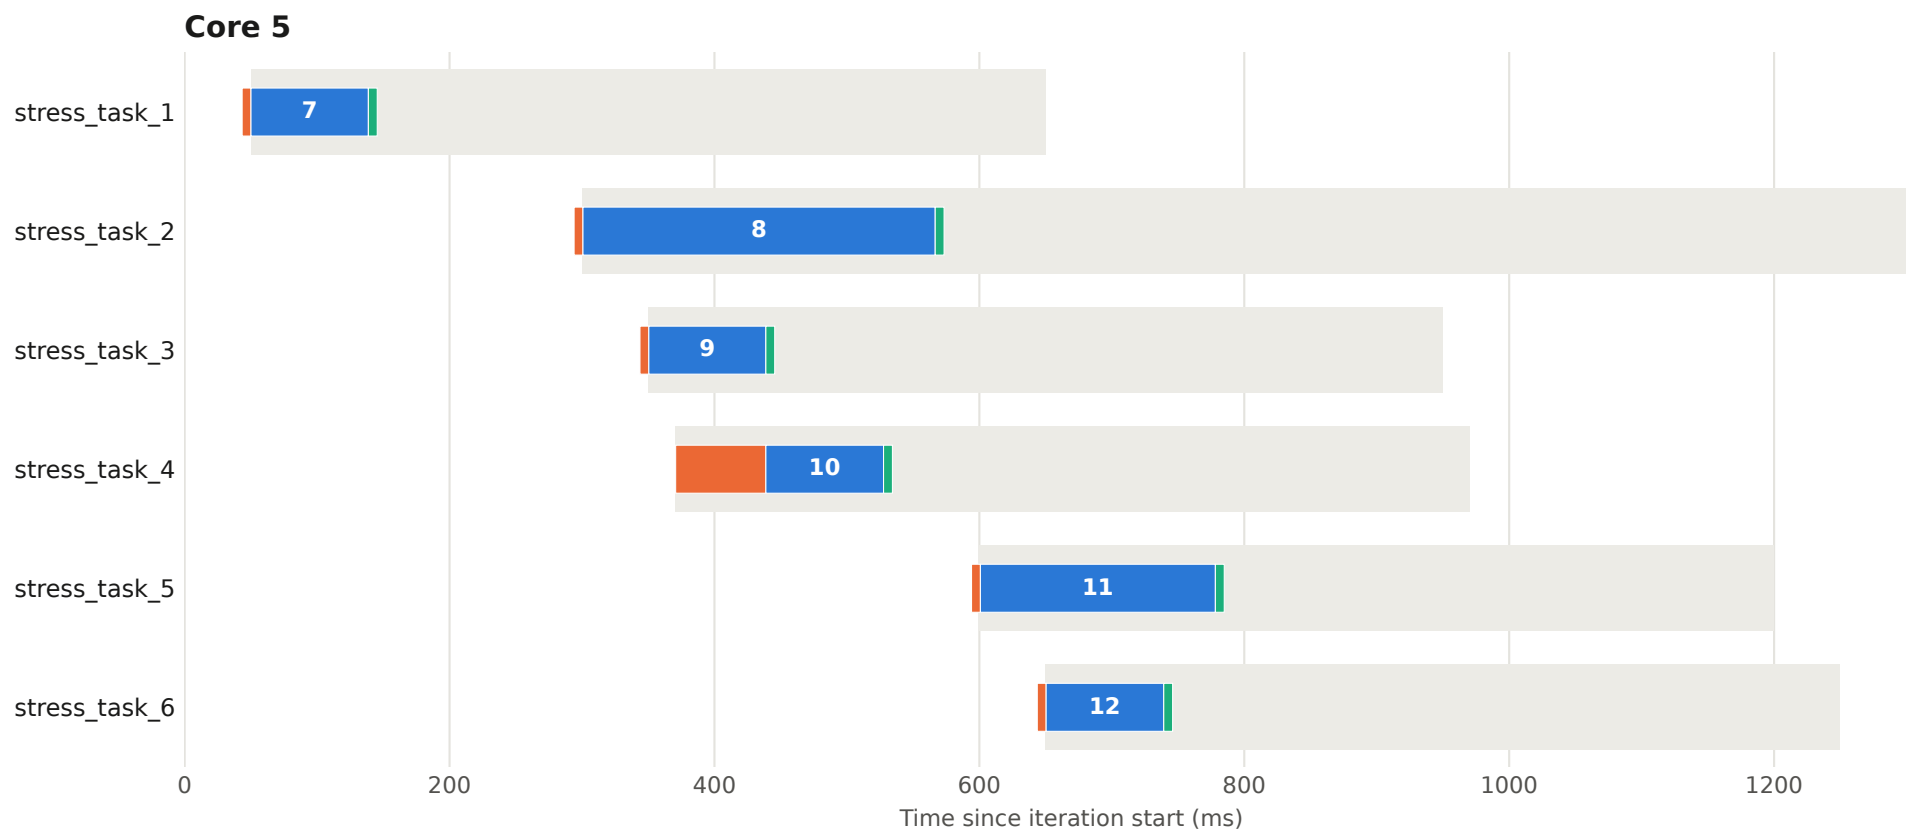


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 51 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

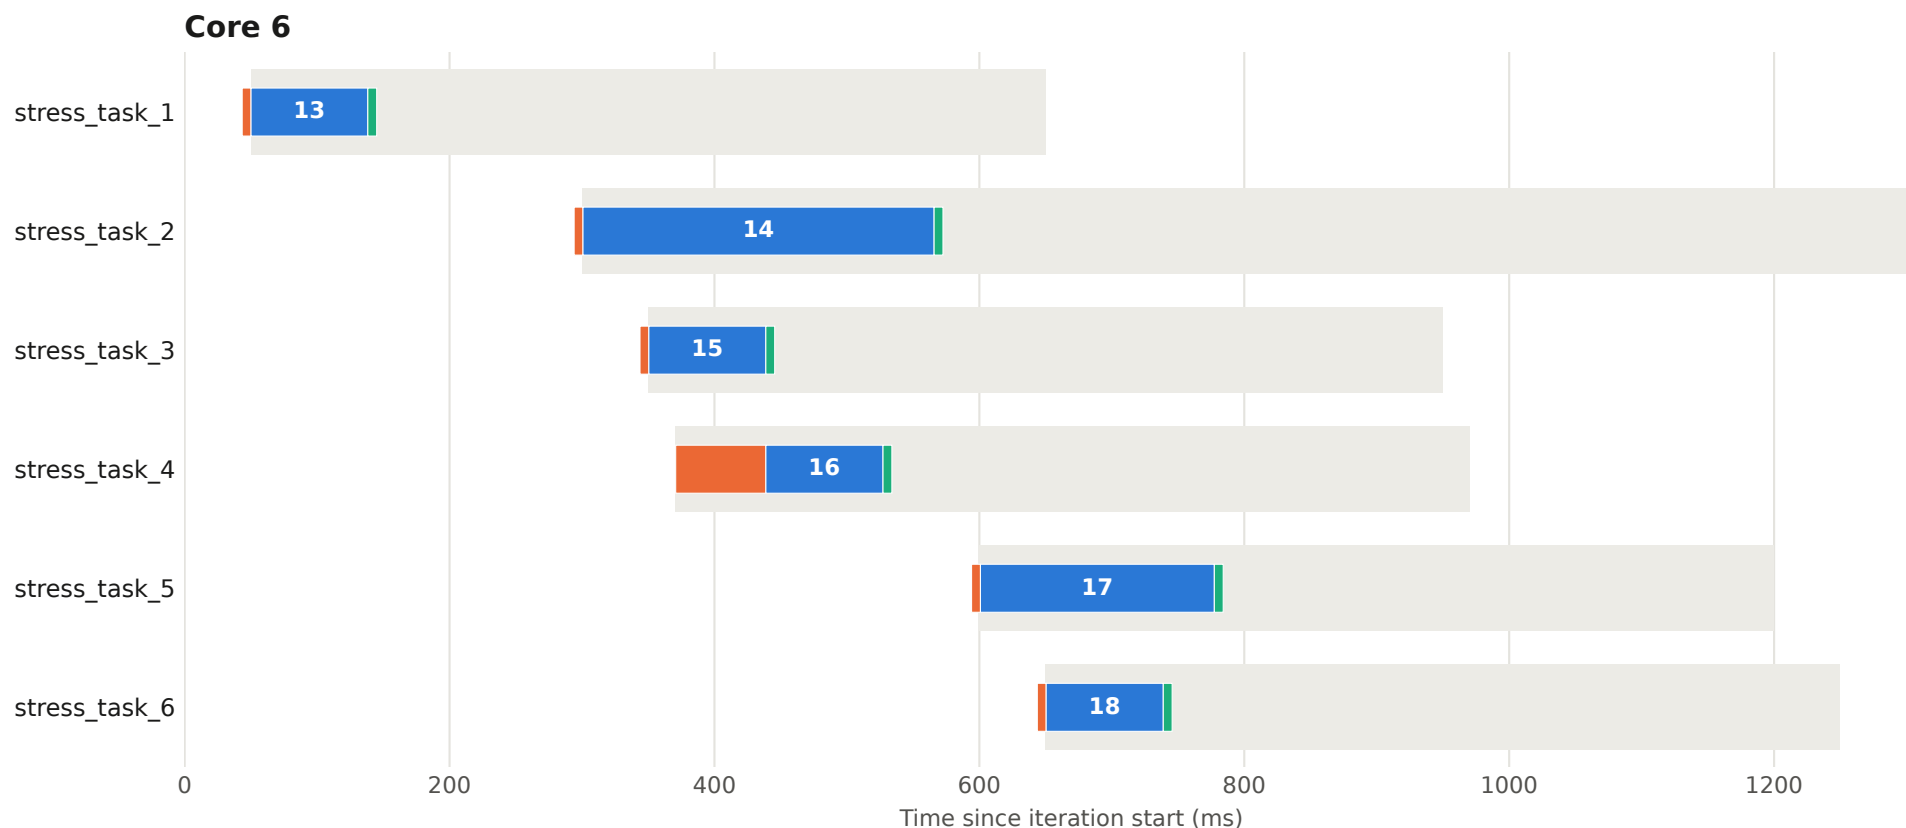


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 51 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

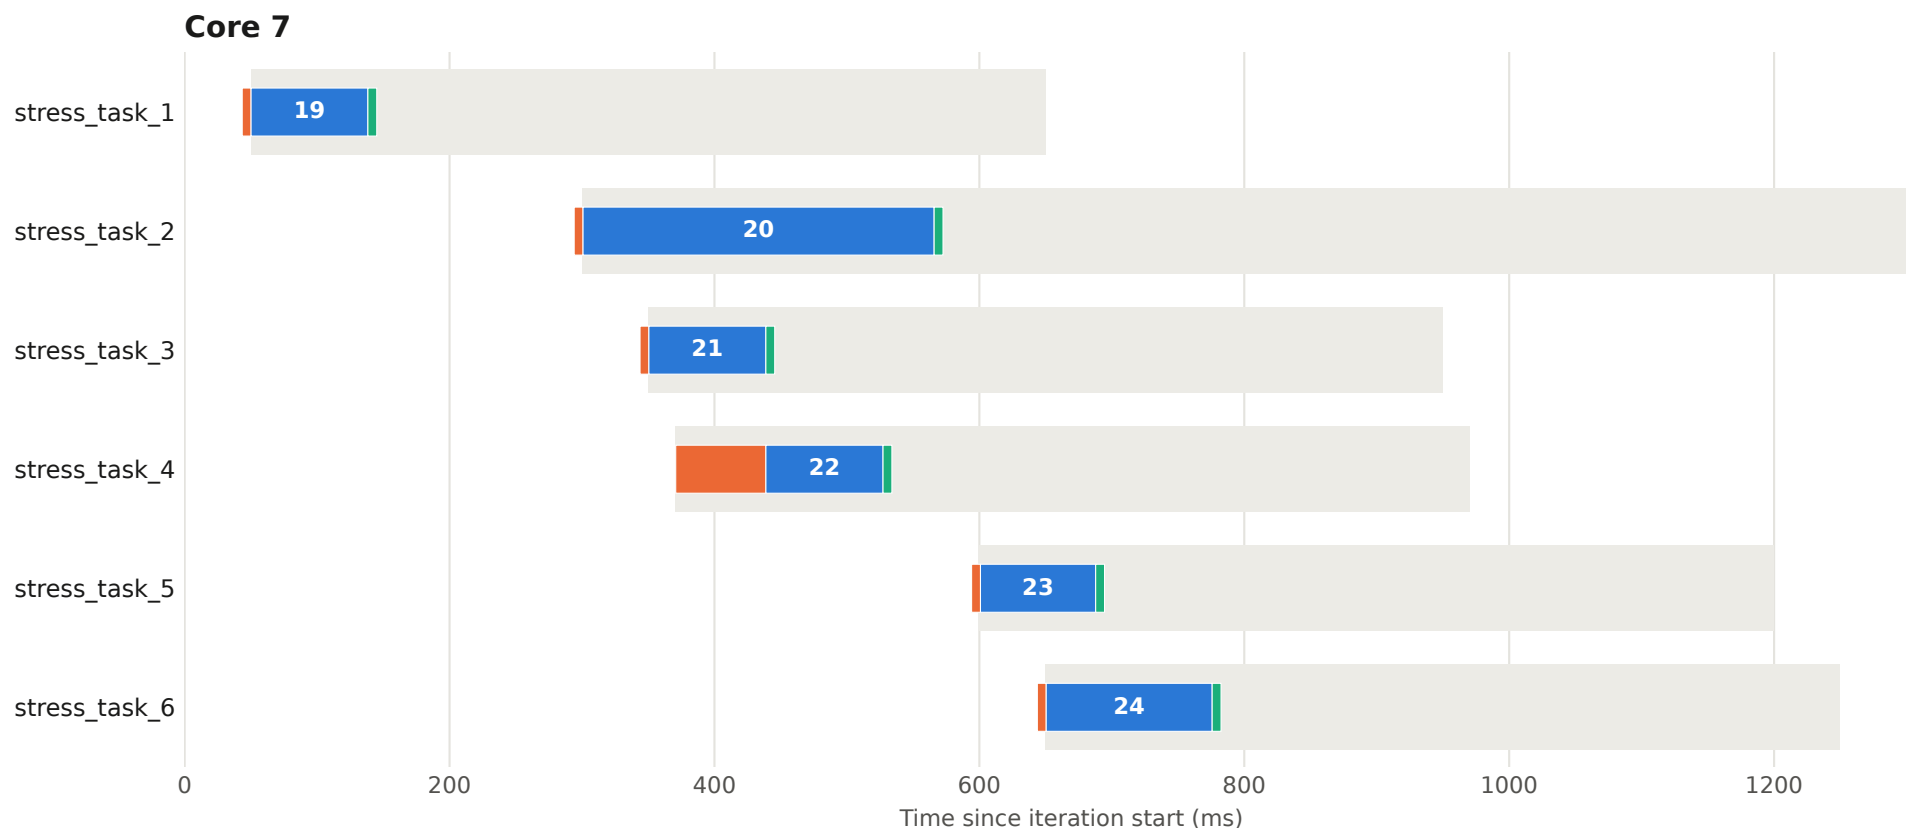


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 52 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

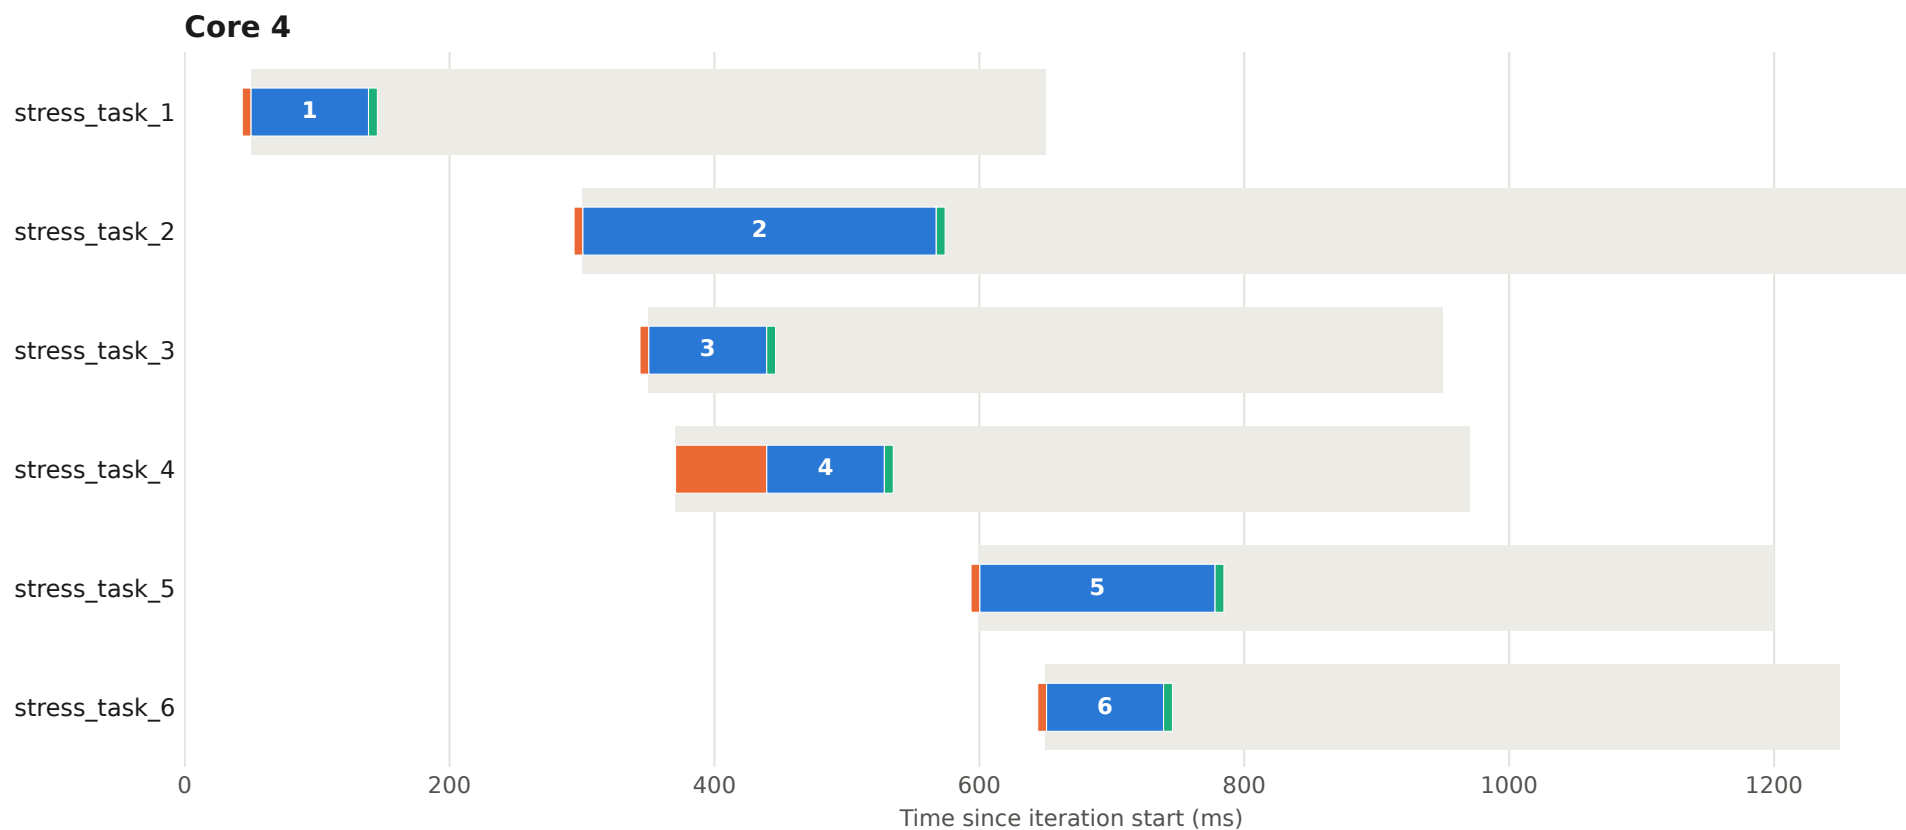


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 52 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

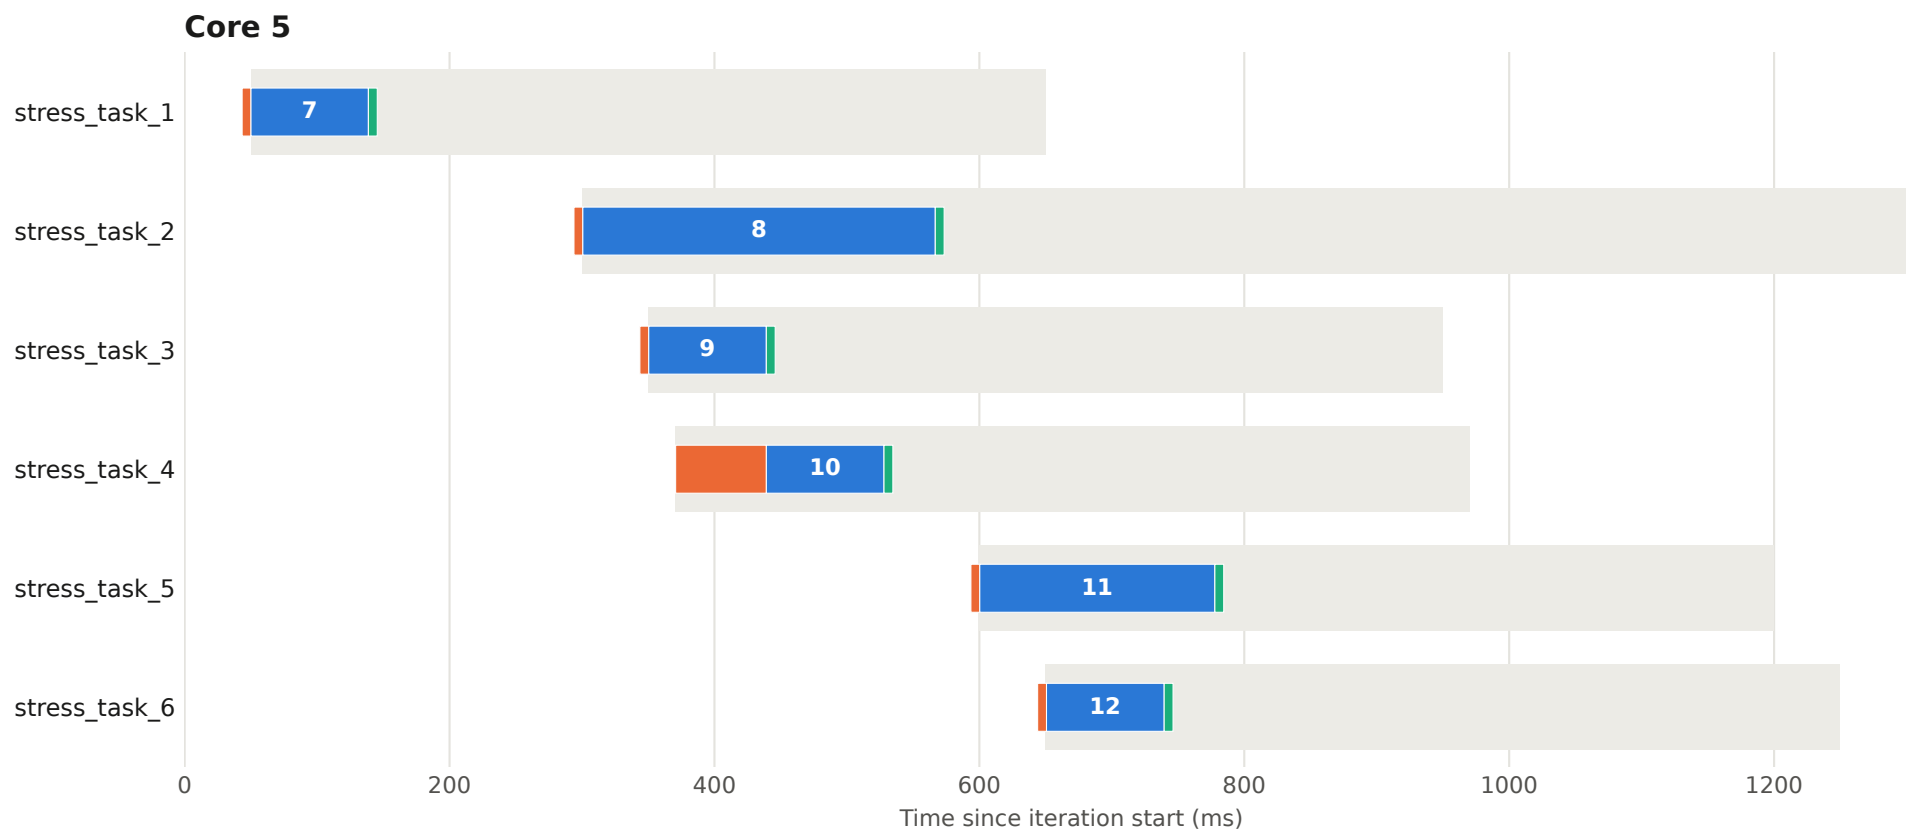


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 52 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

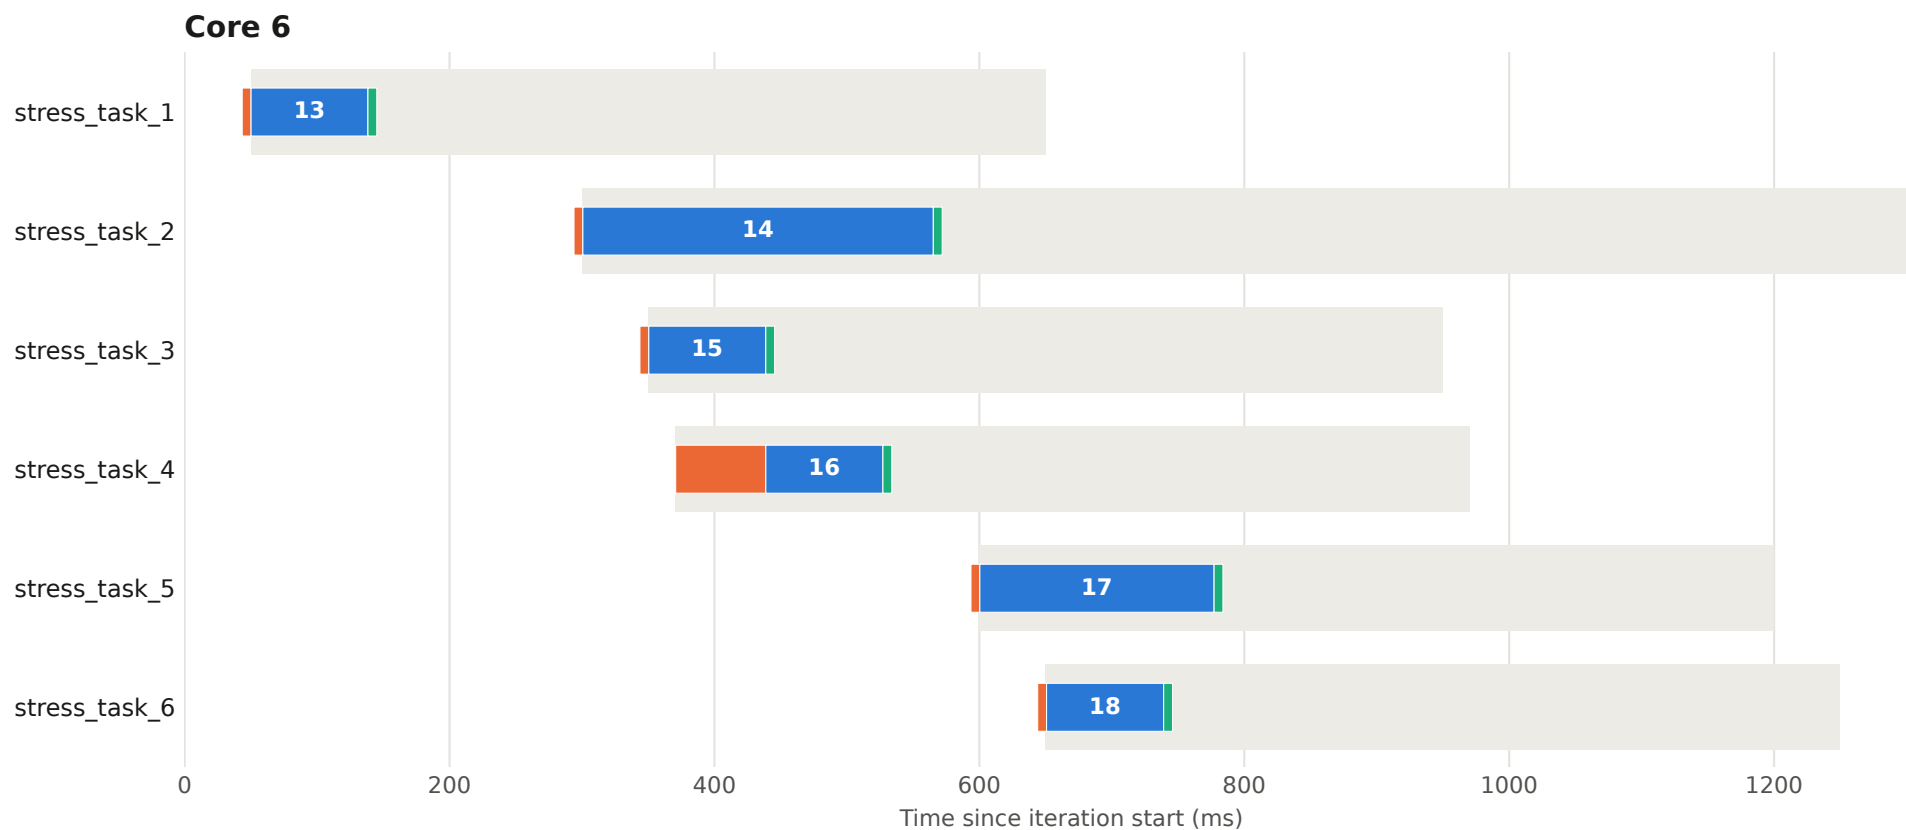


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 52 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

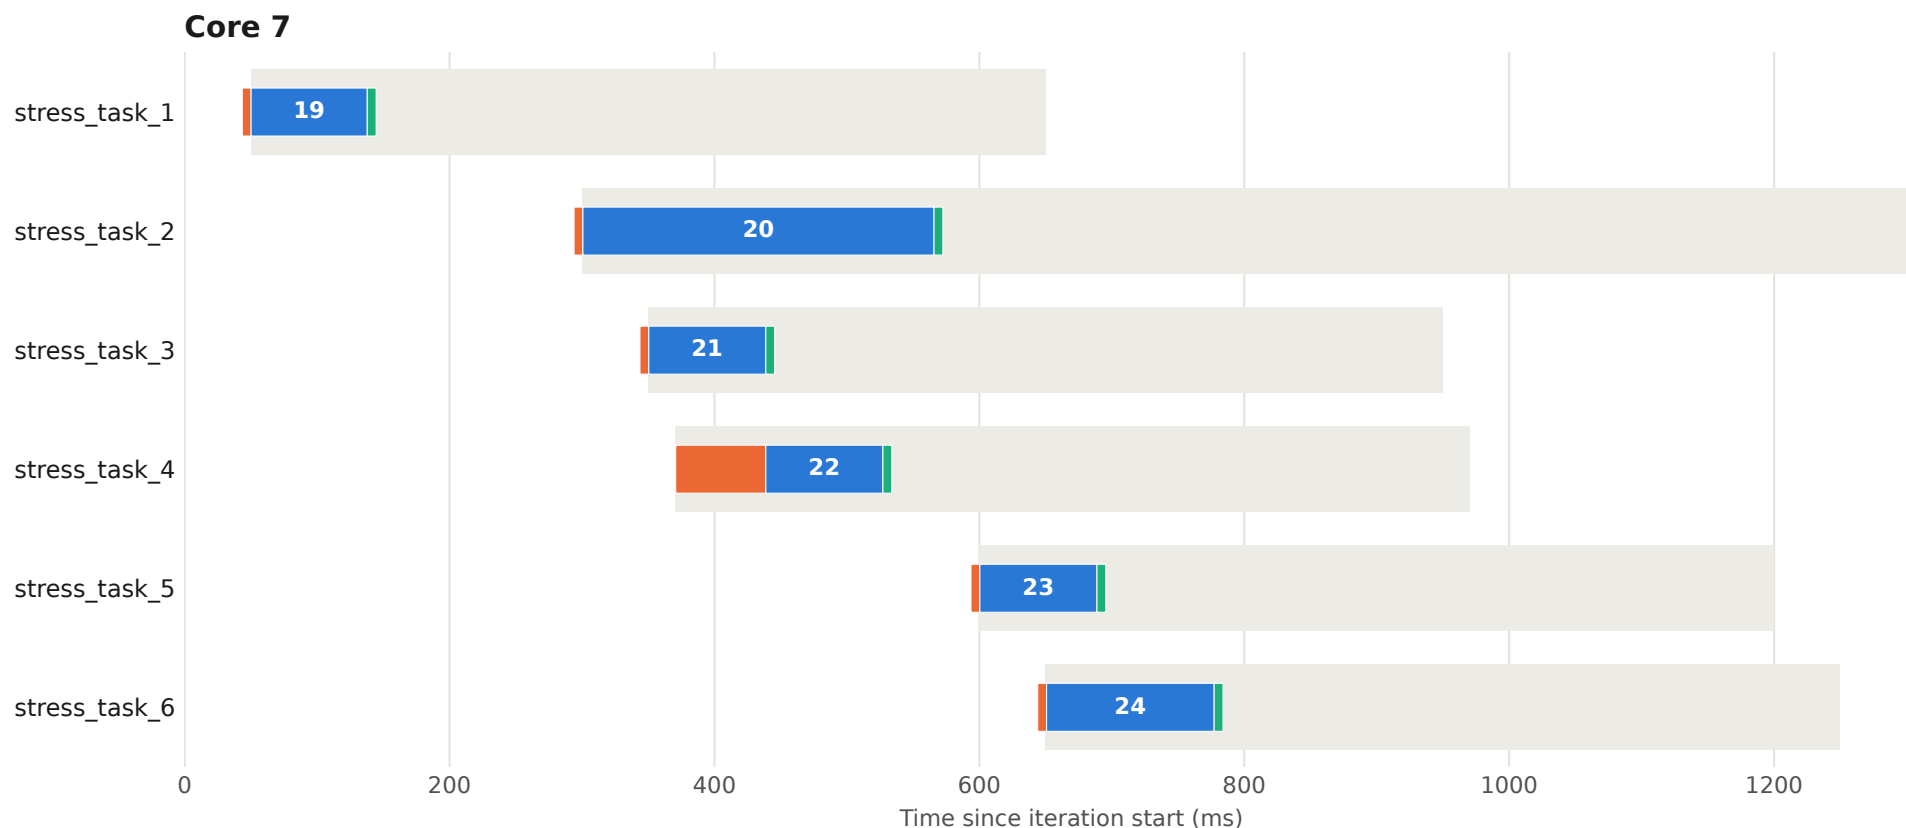


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 53 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

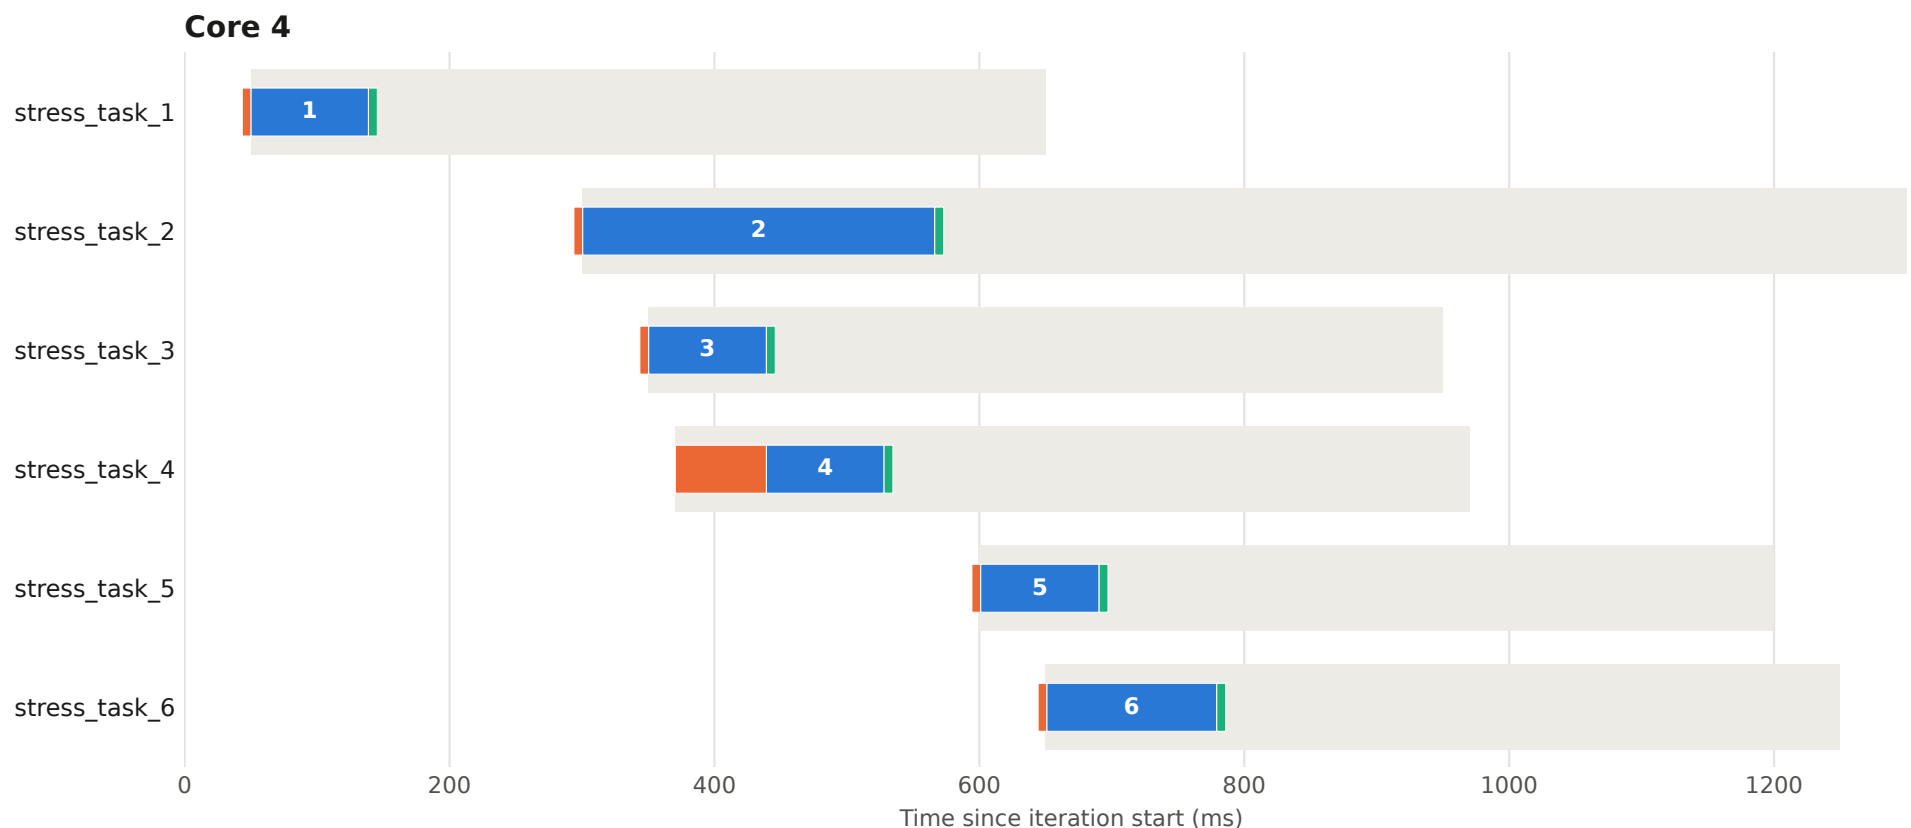


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 53 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

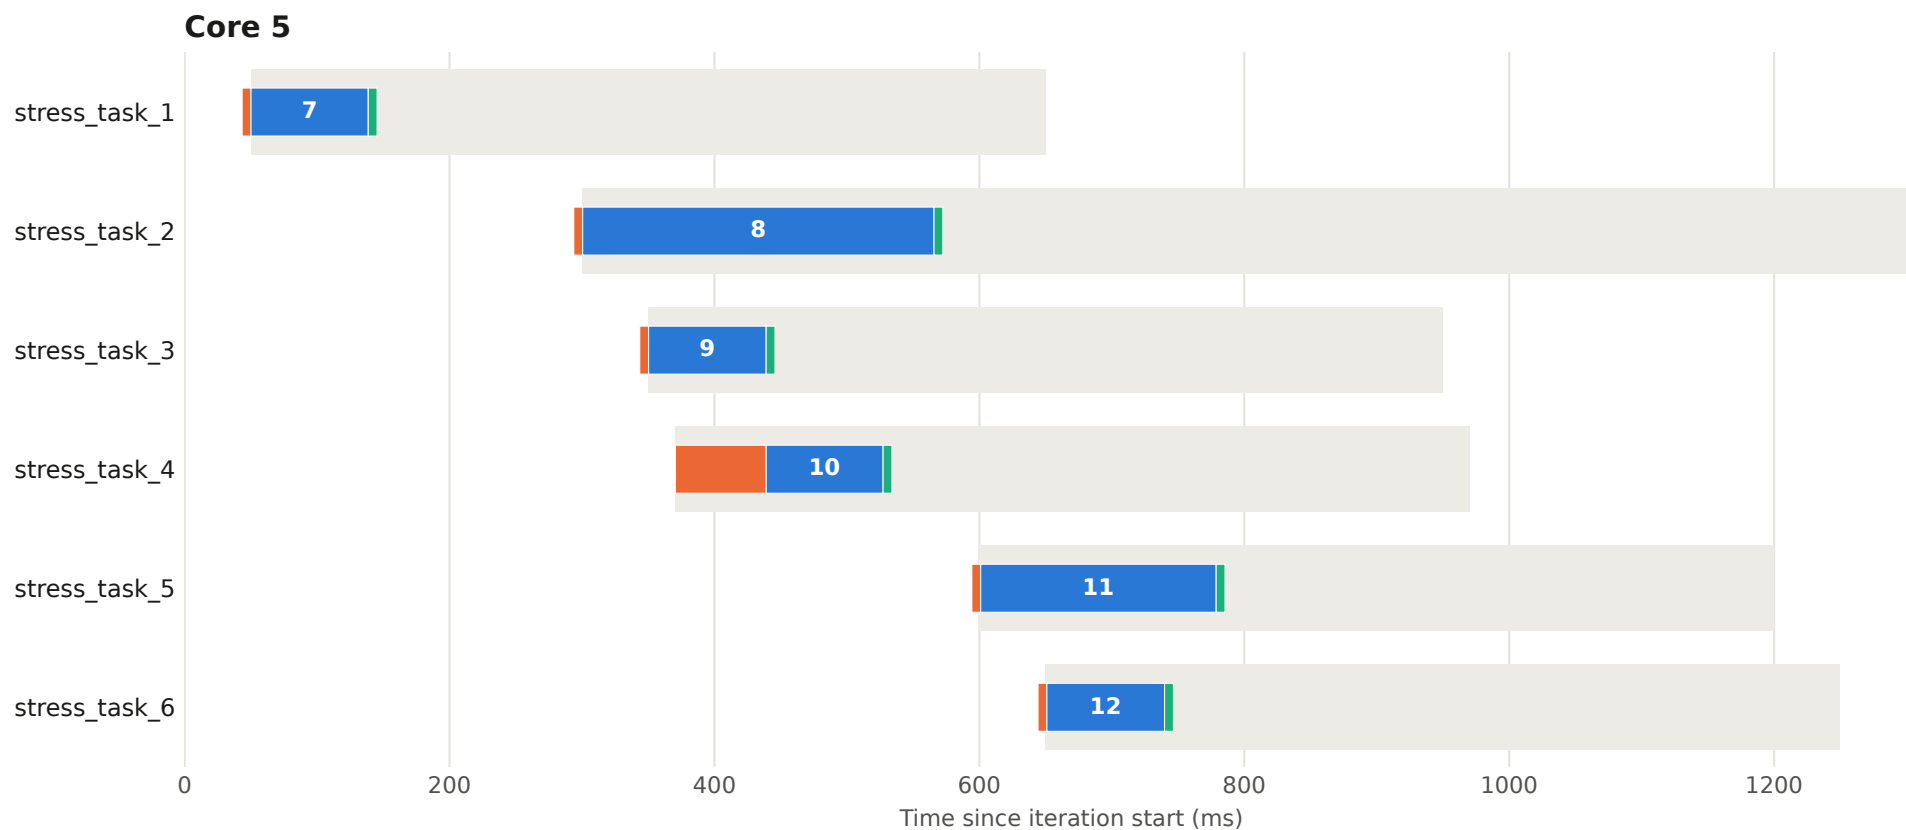


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 53 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

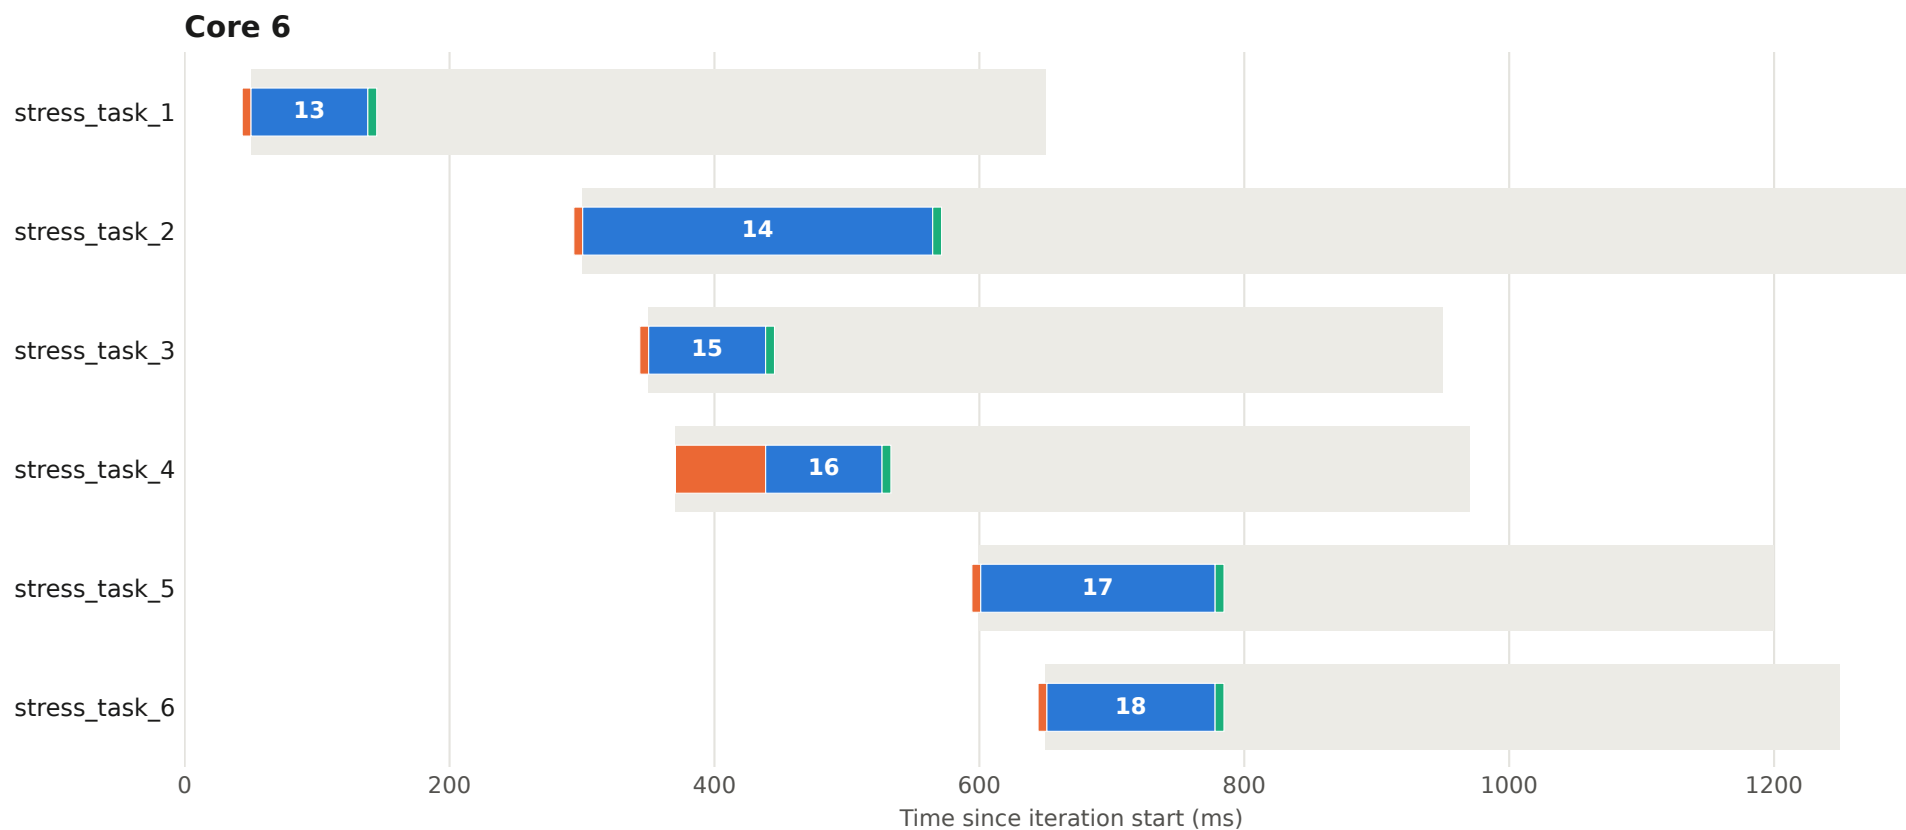


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 53 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

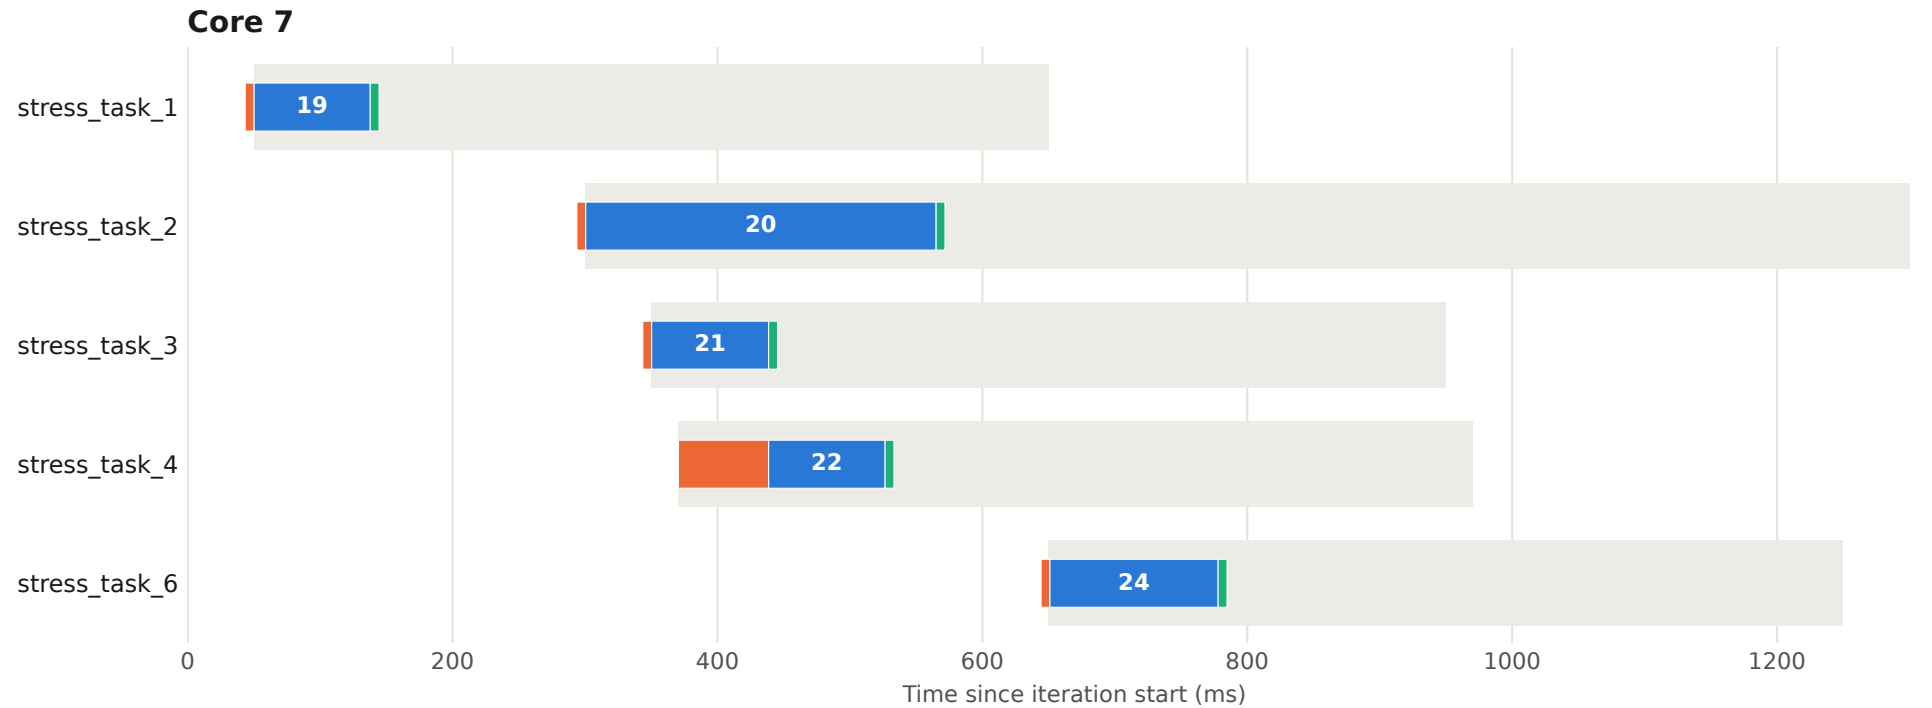


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 53 - core 72026

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

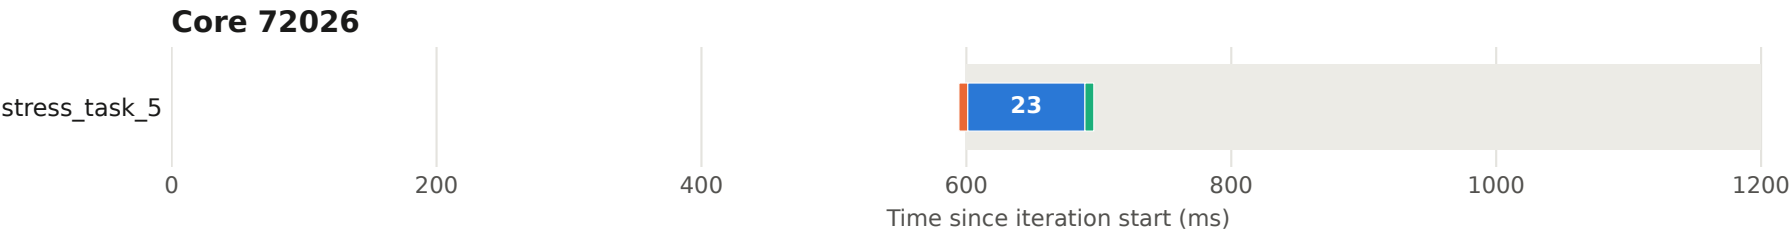




# Execution plan - iteration 54 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

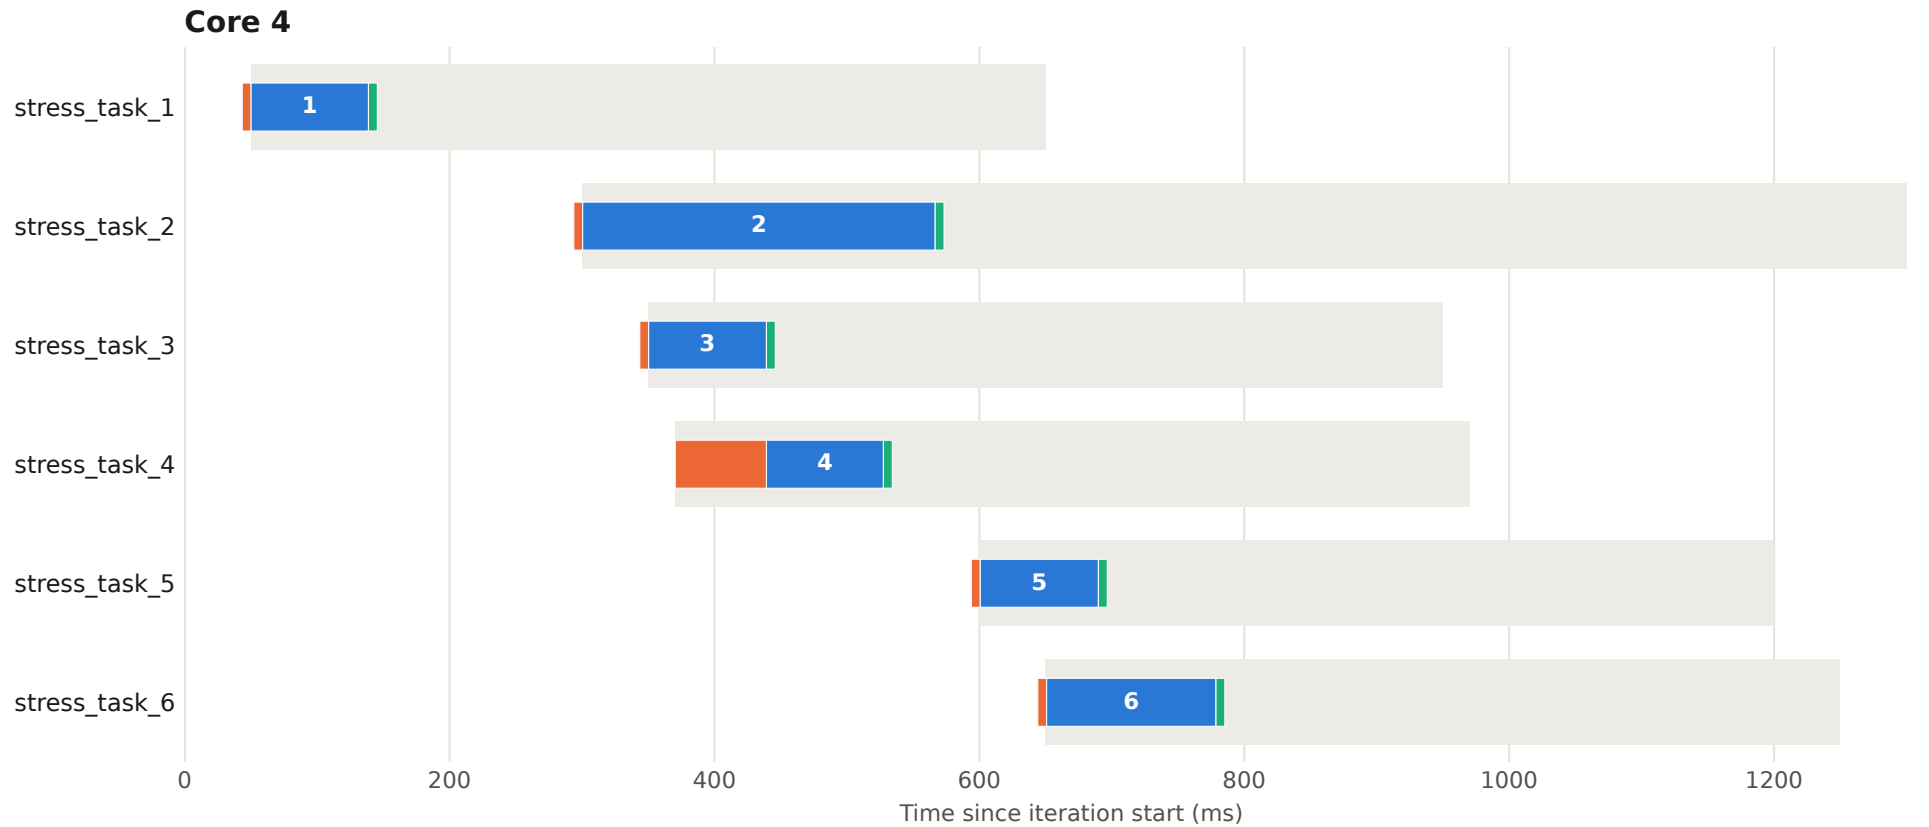


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 54 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

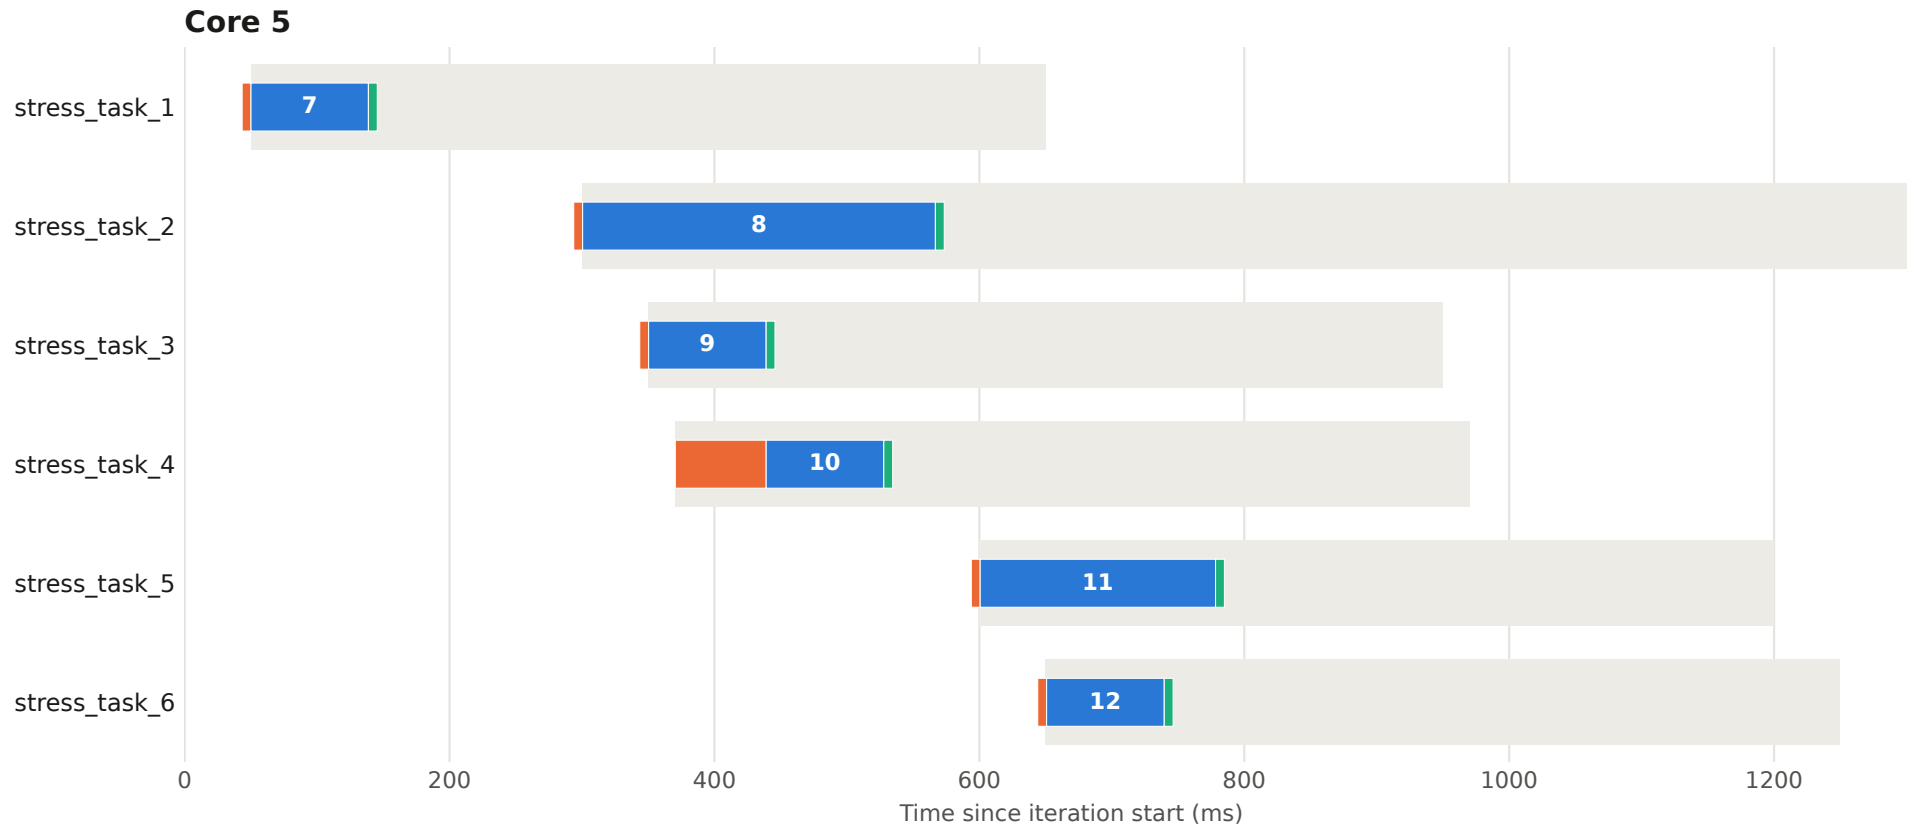


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 54 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

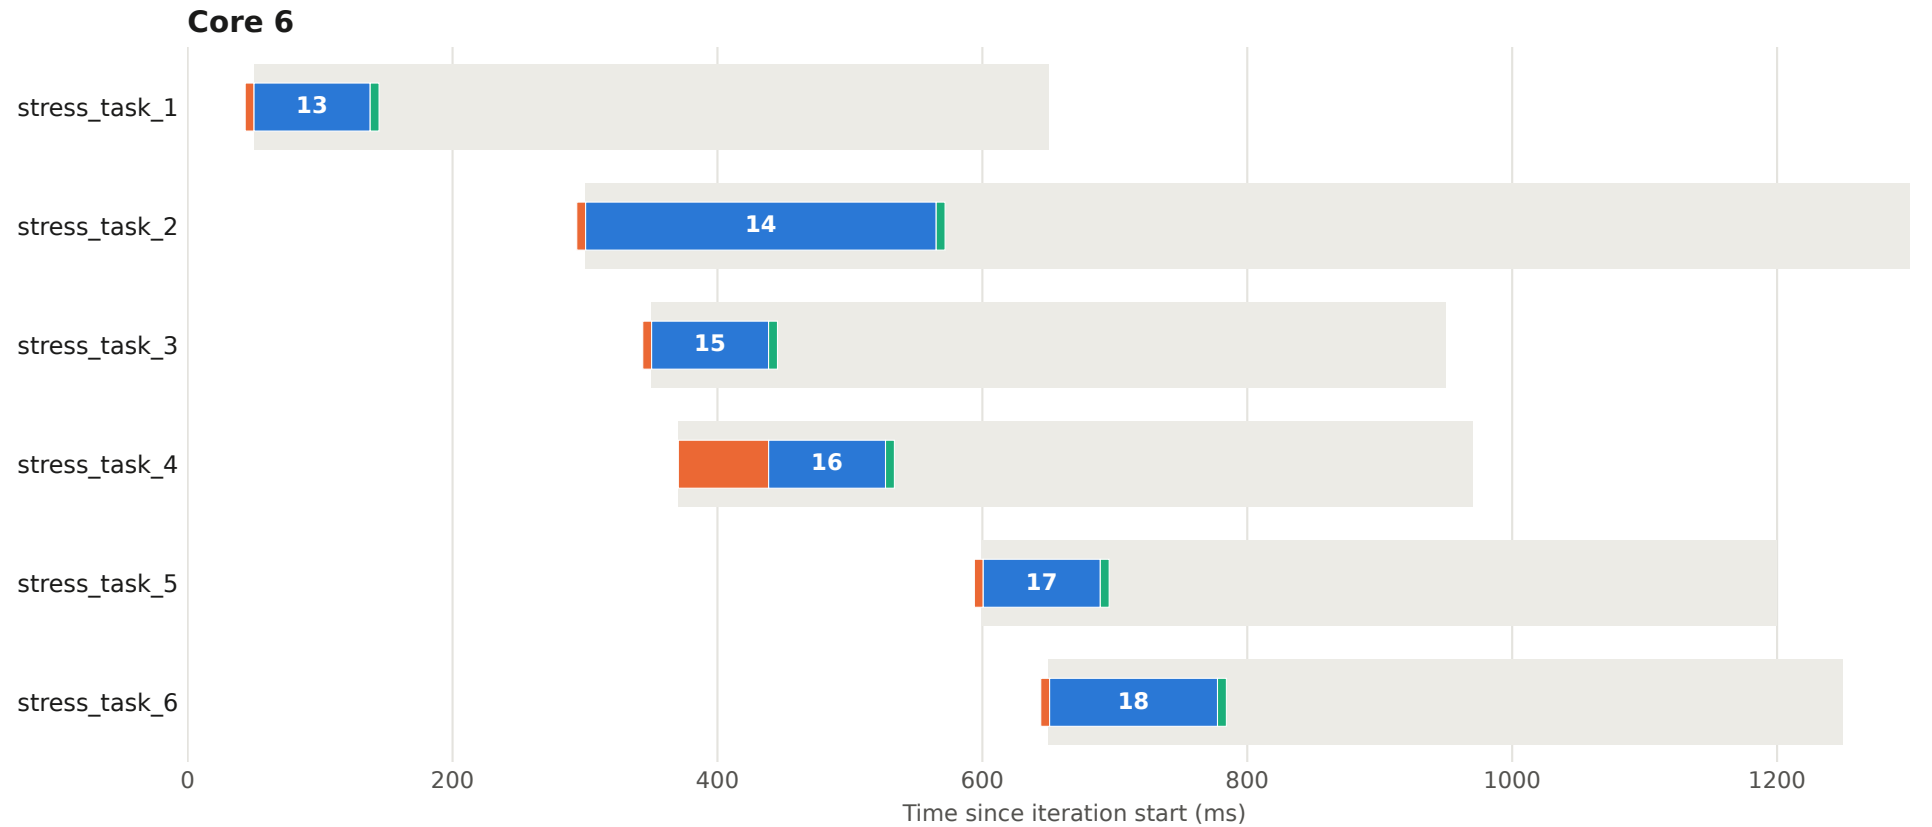


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 54 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

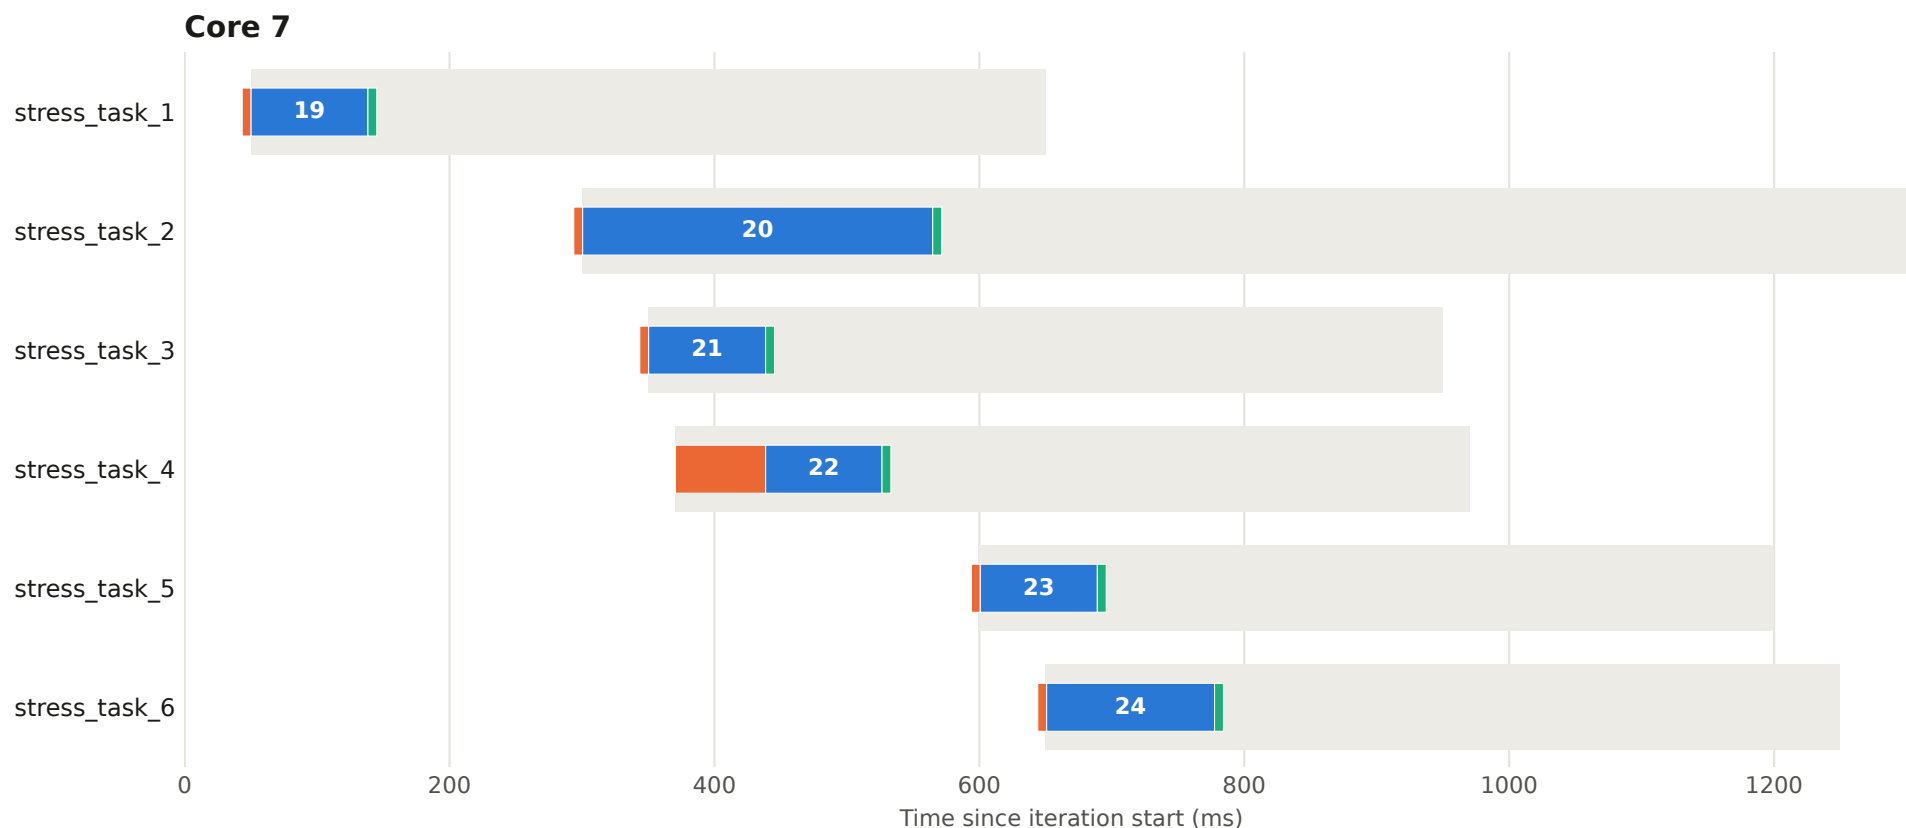


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 55 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

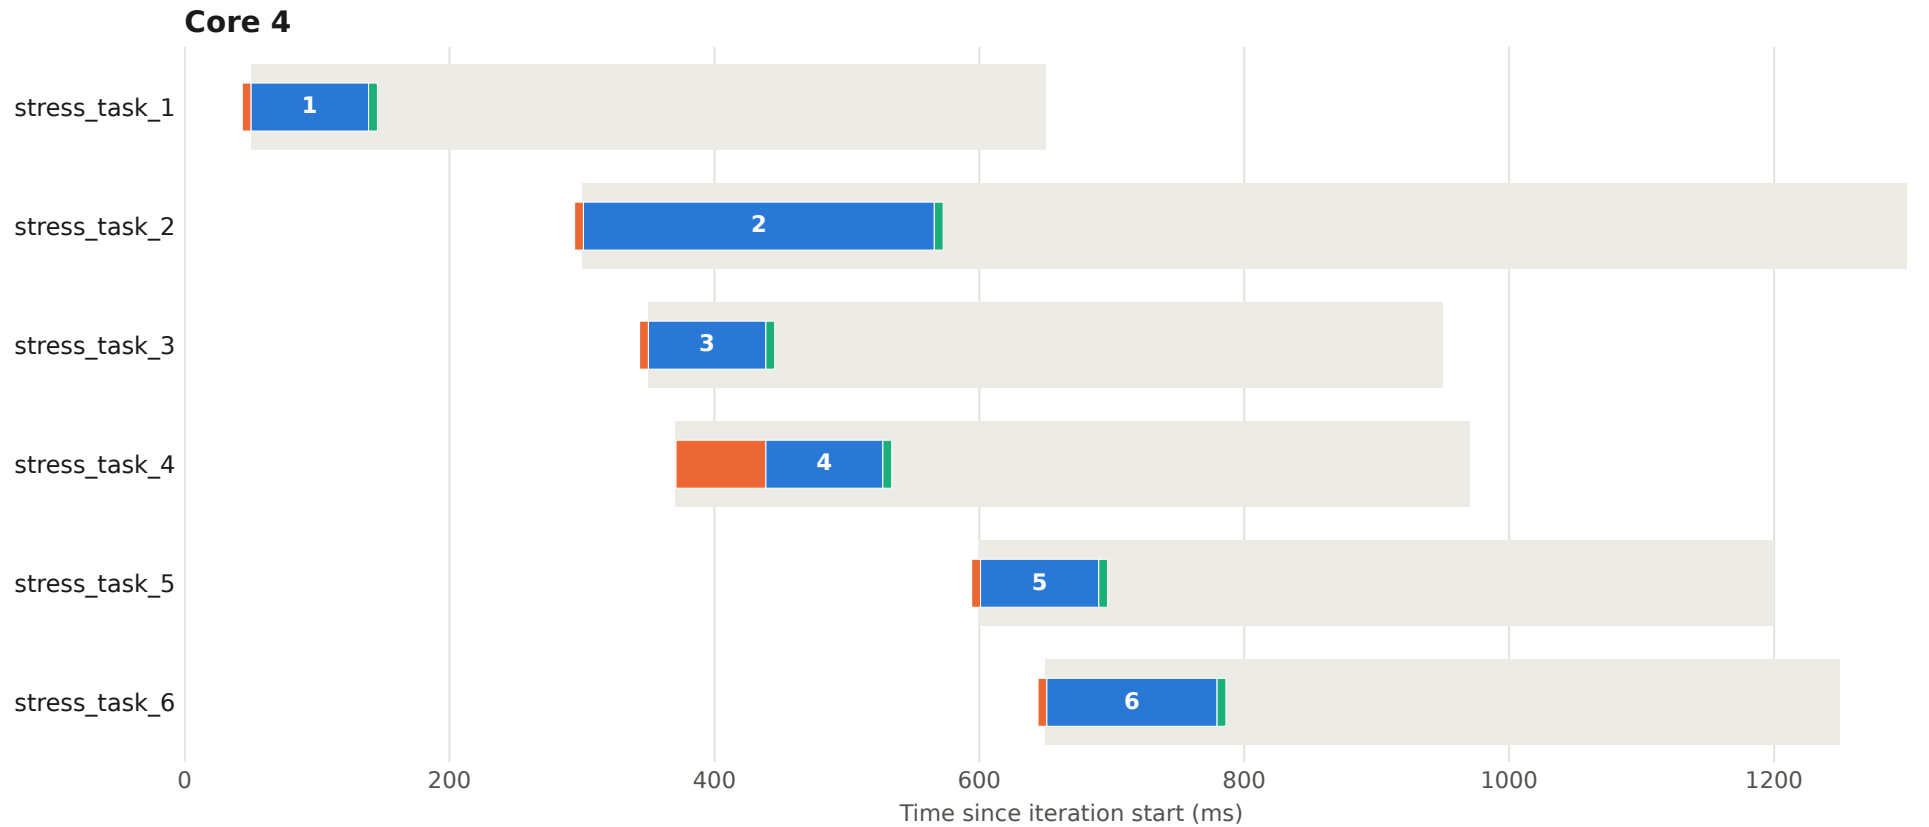


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 55 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

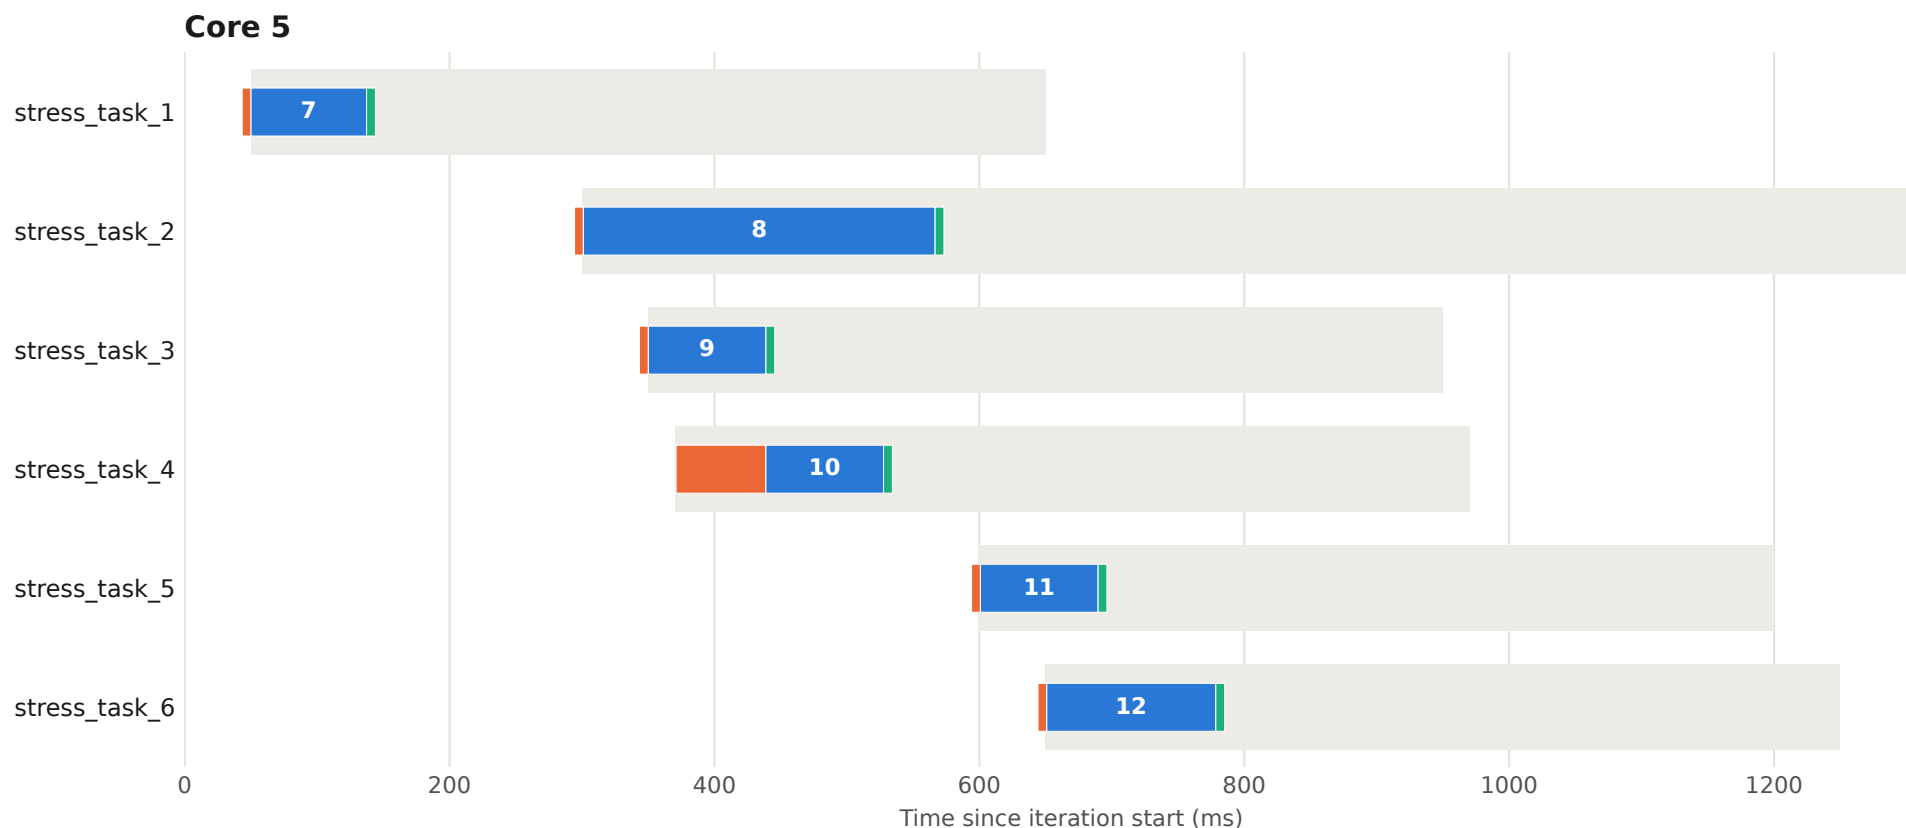


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 55 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

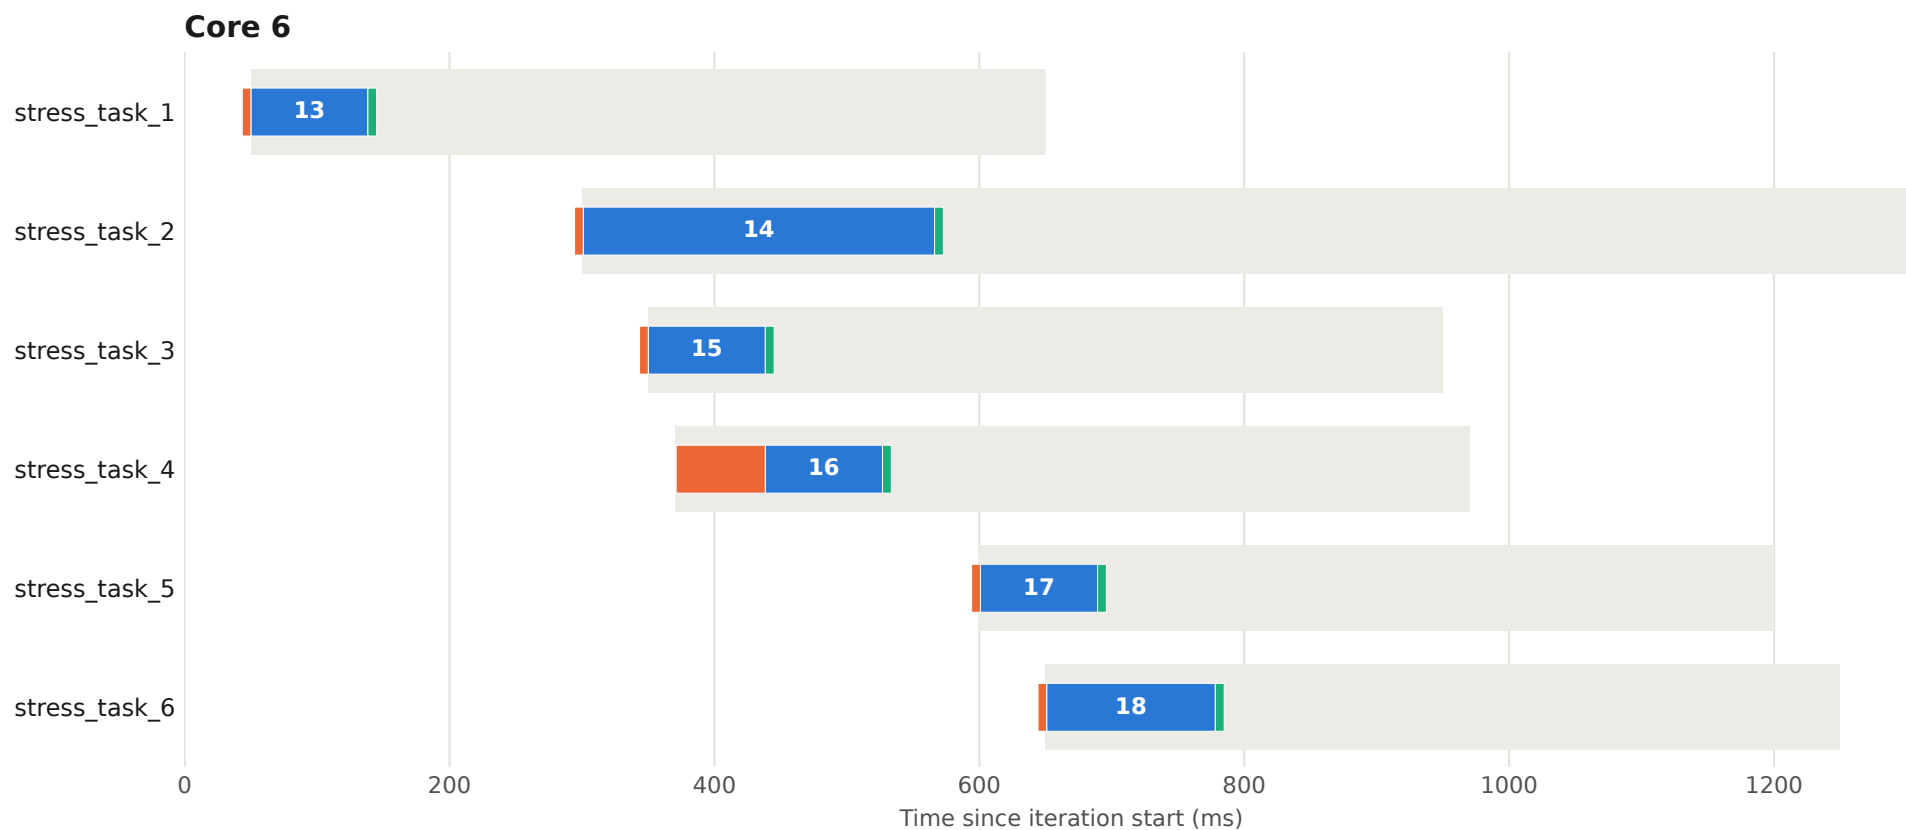


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 55 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

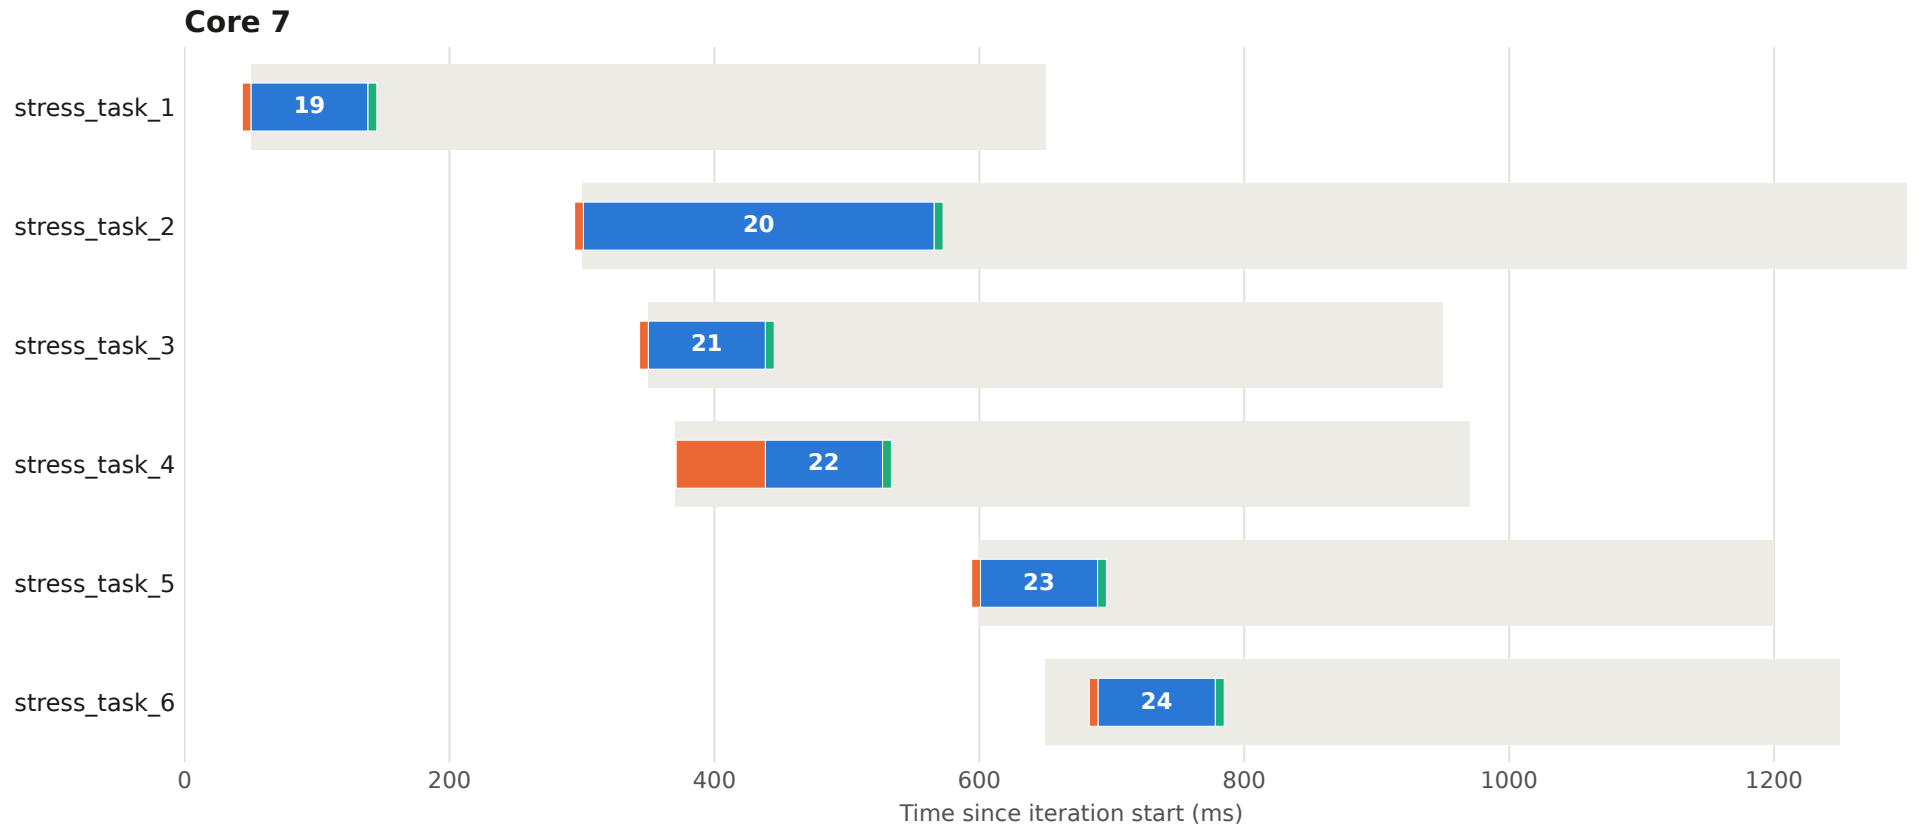


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 56 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

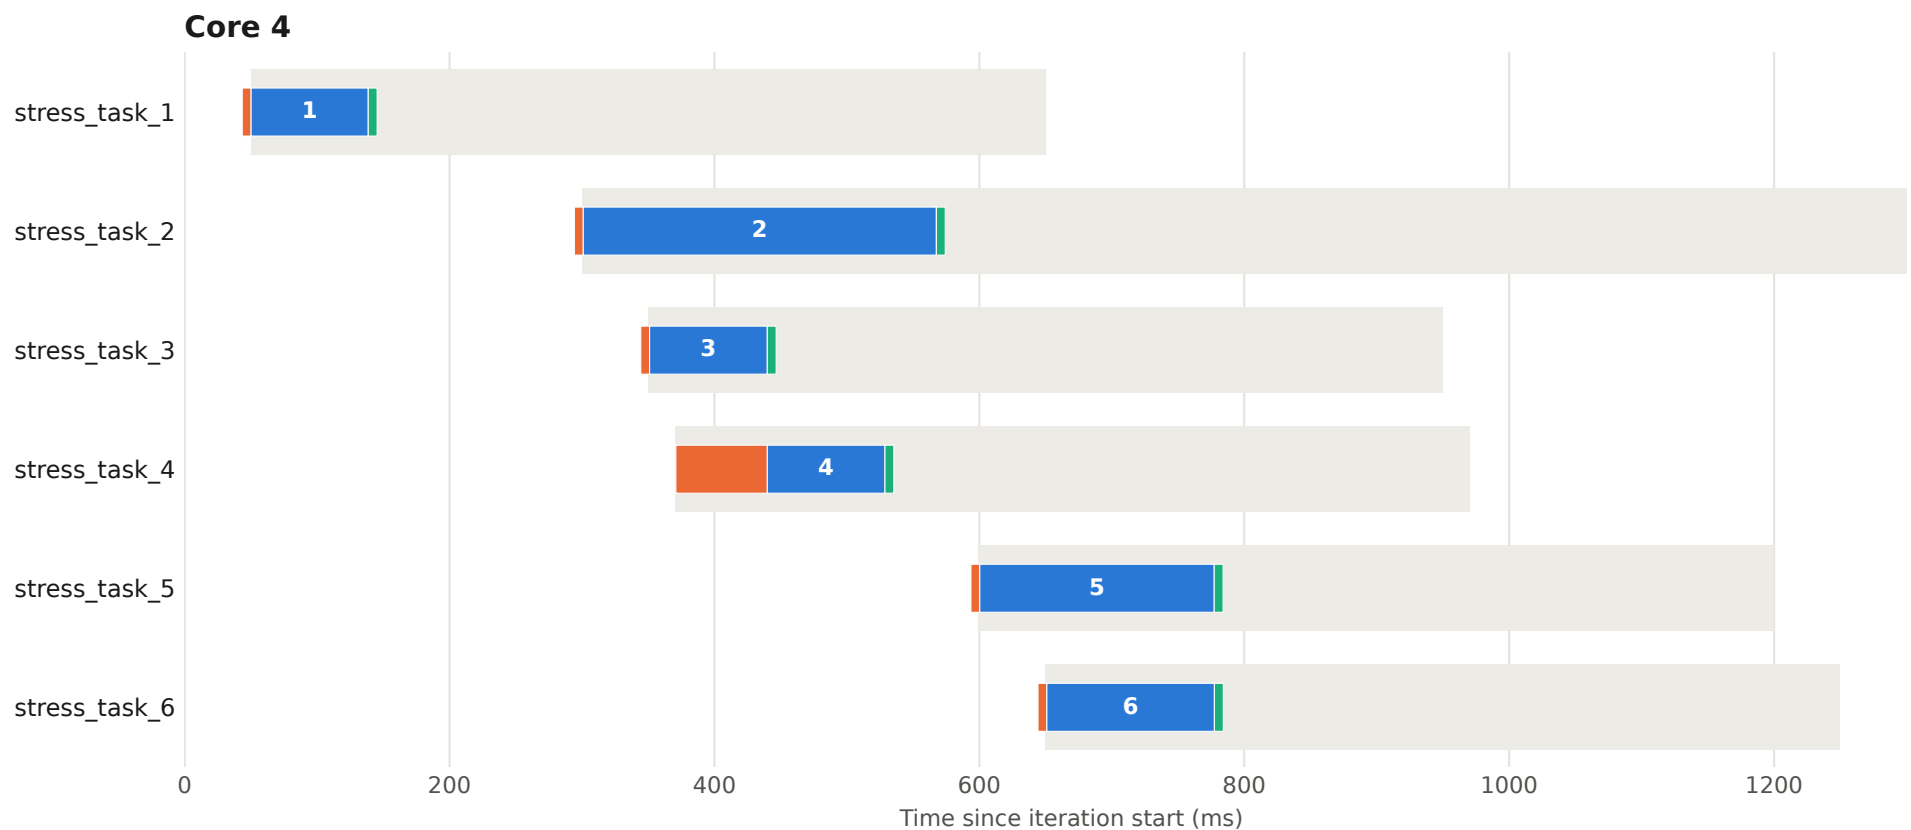


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 56 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

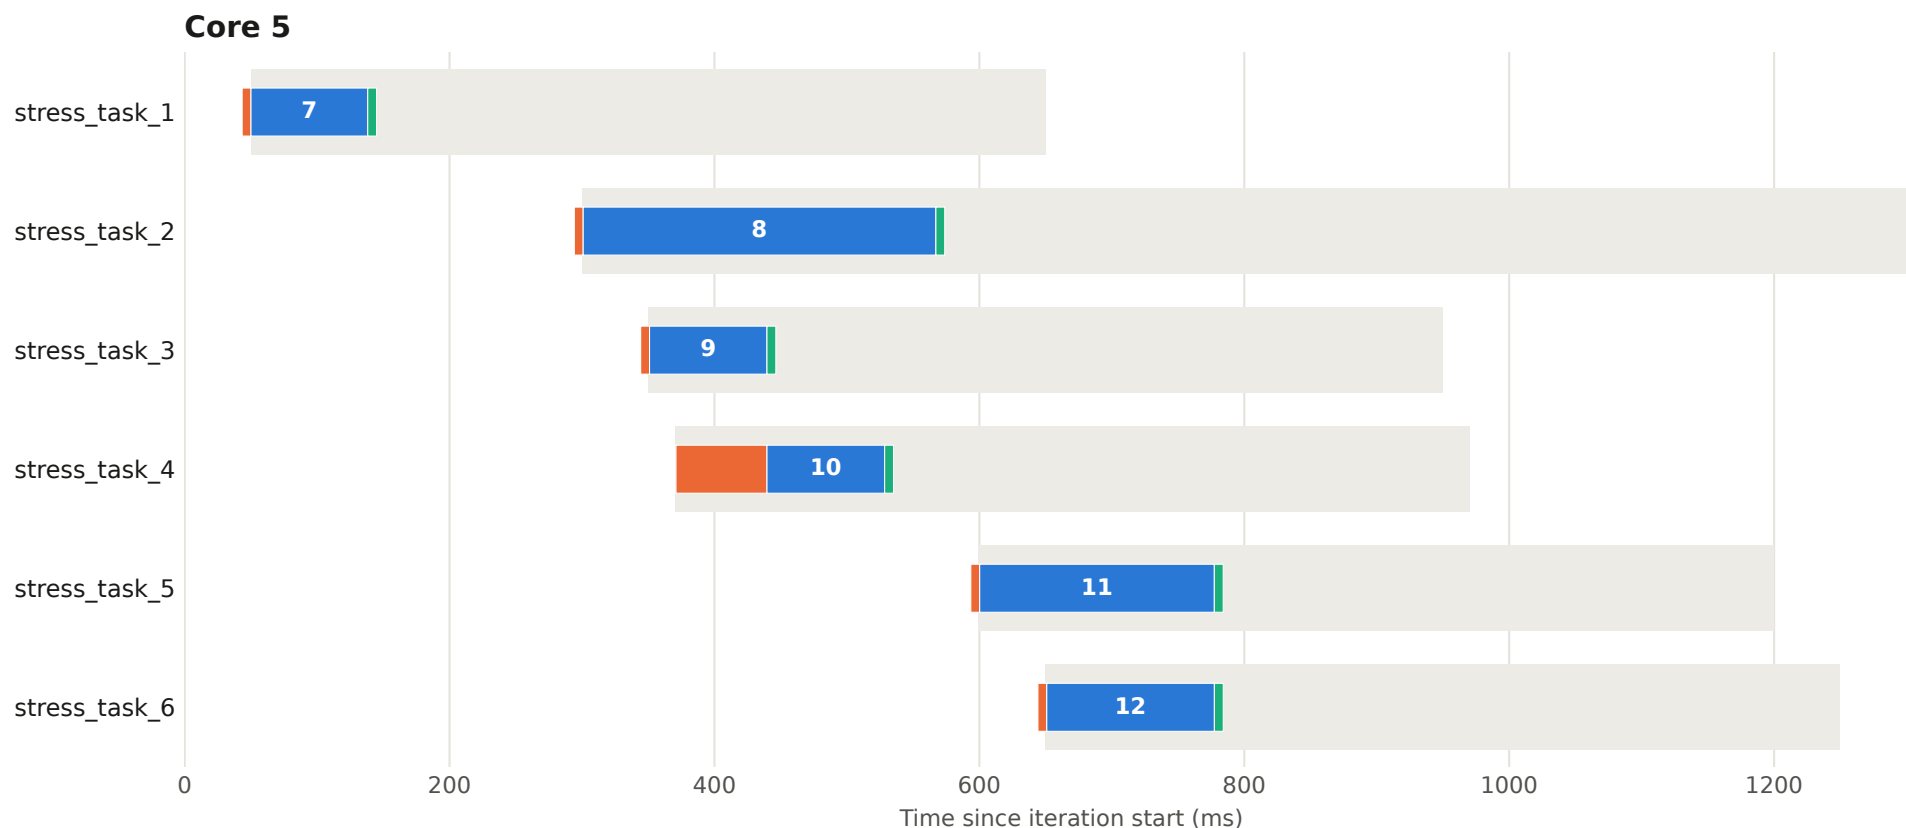


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 56 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

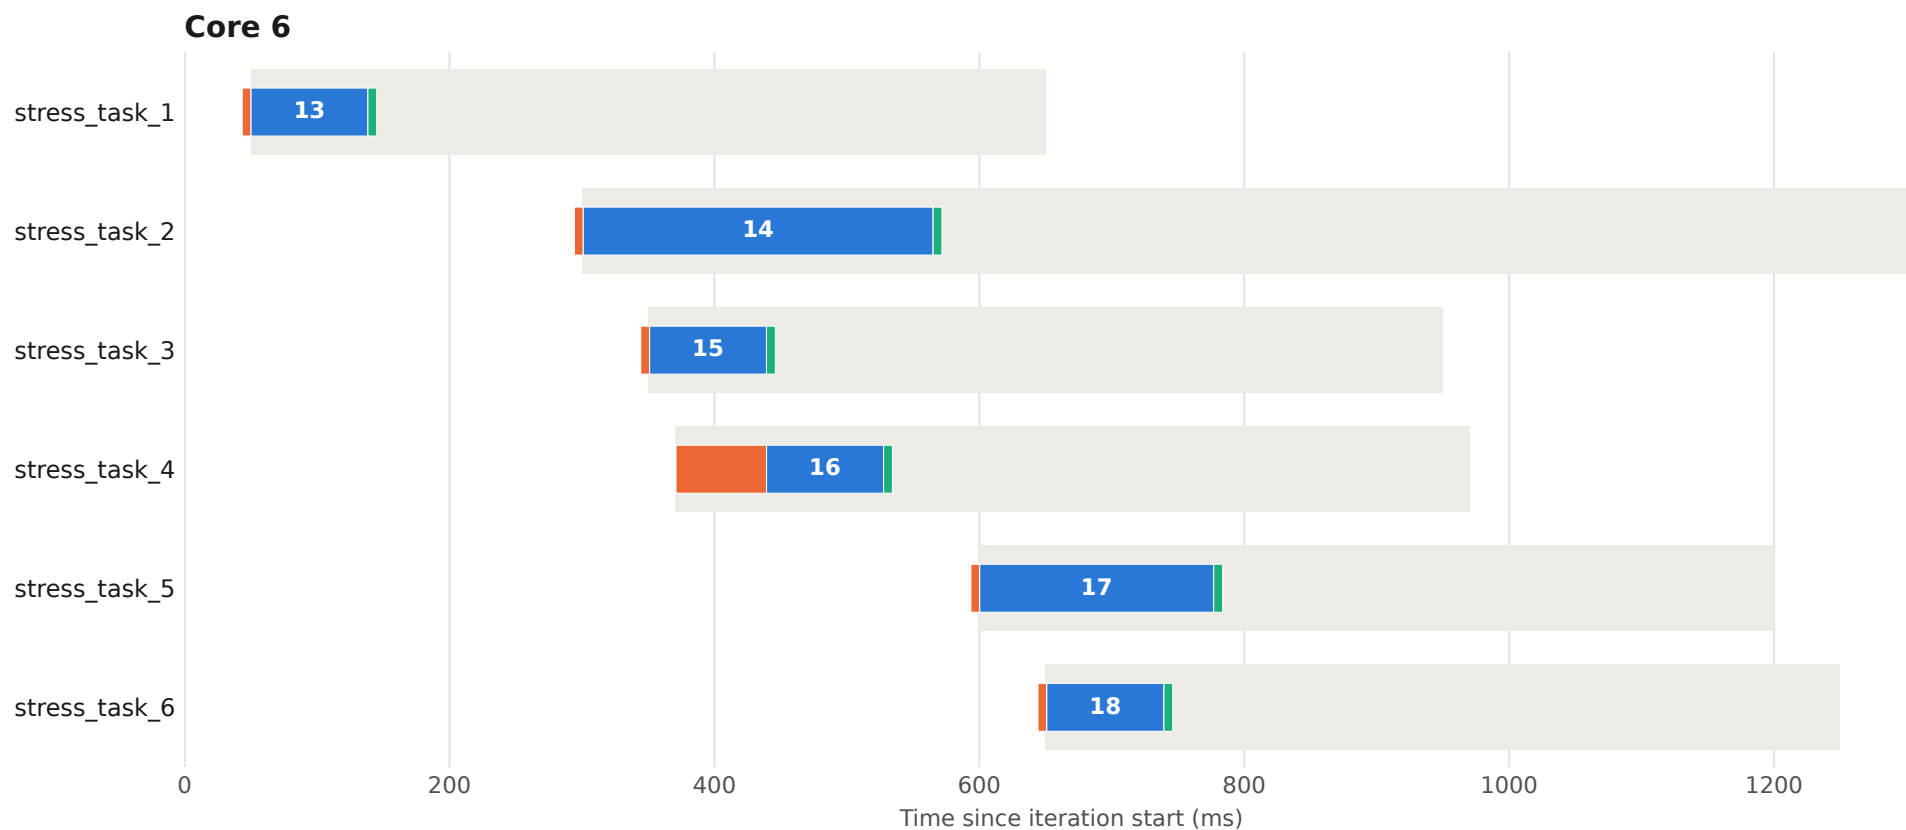


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 56 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

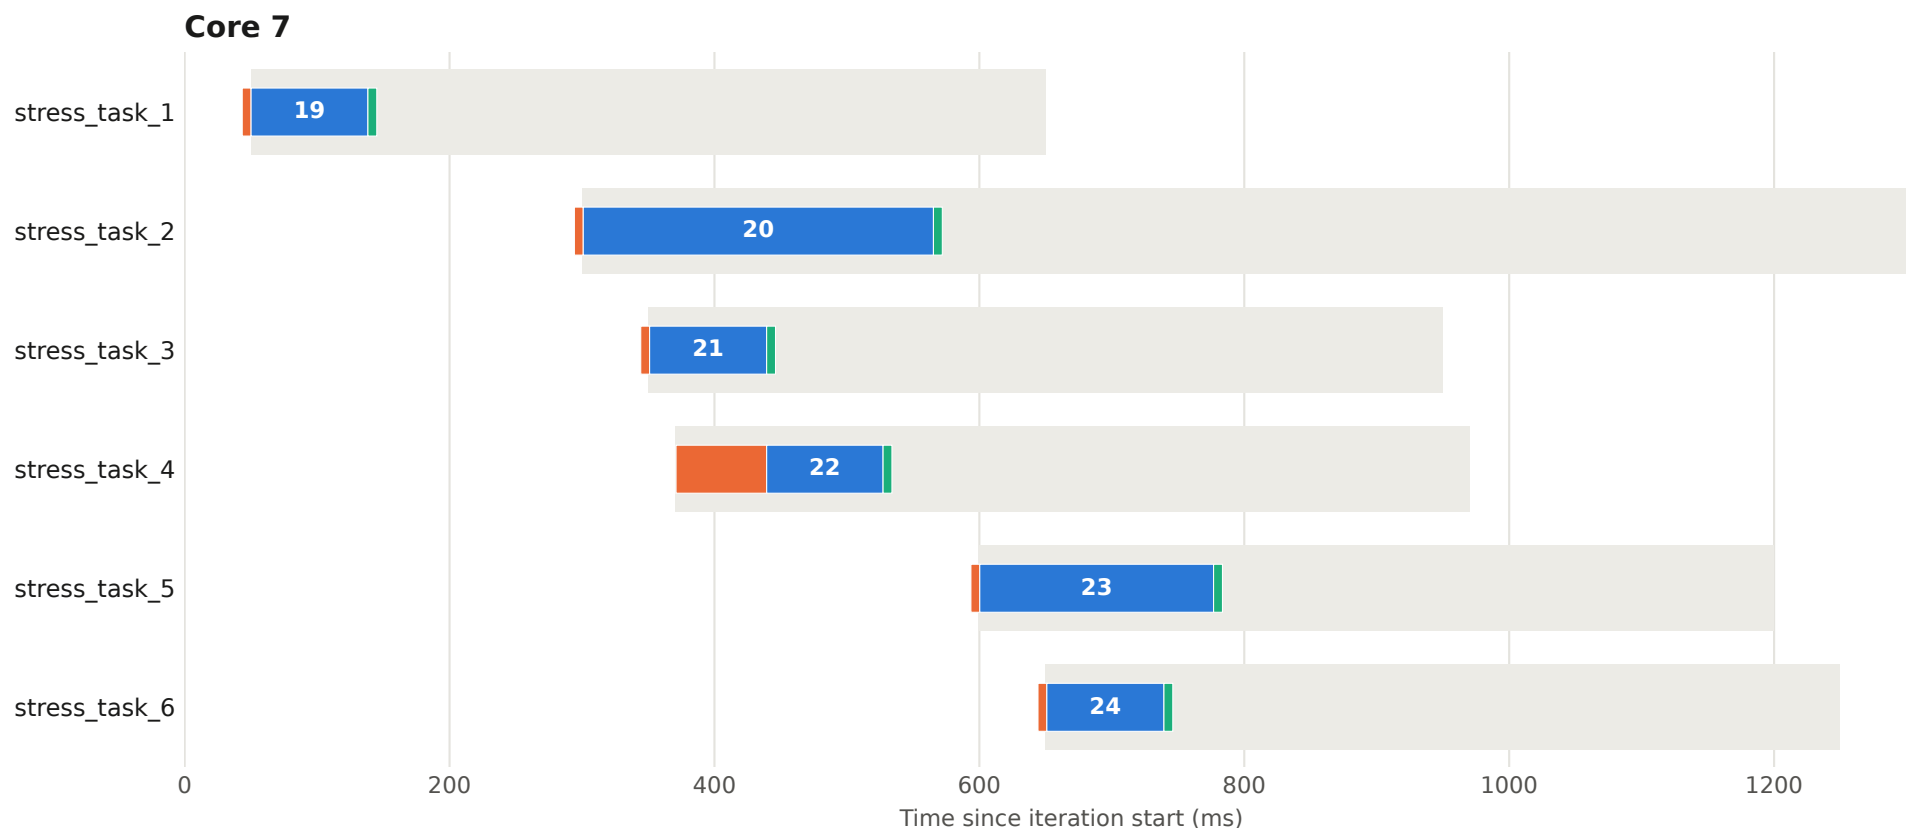


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 57 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

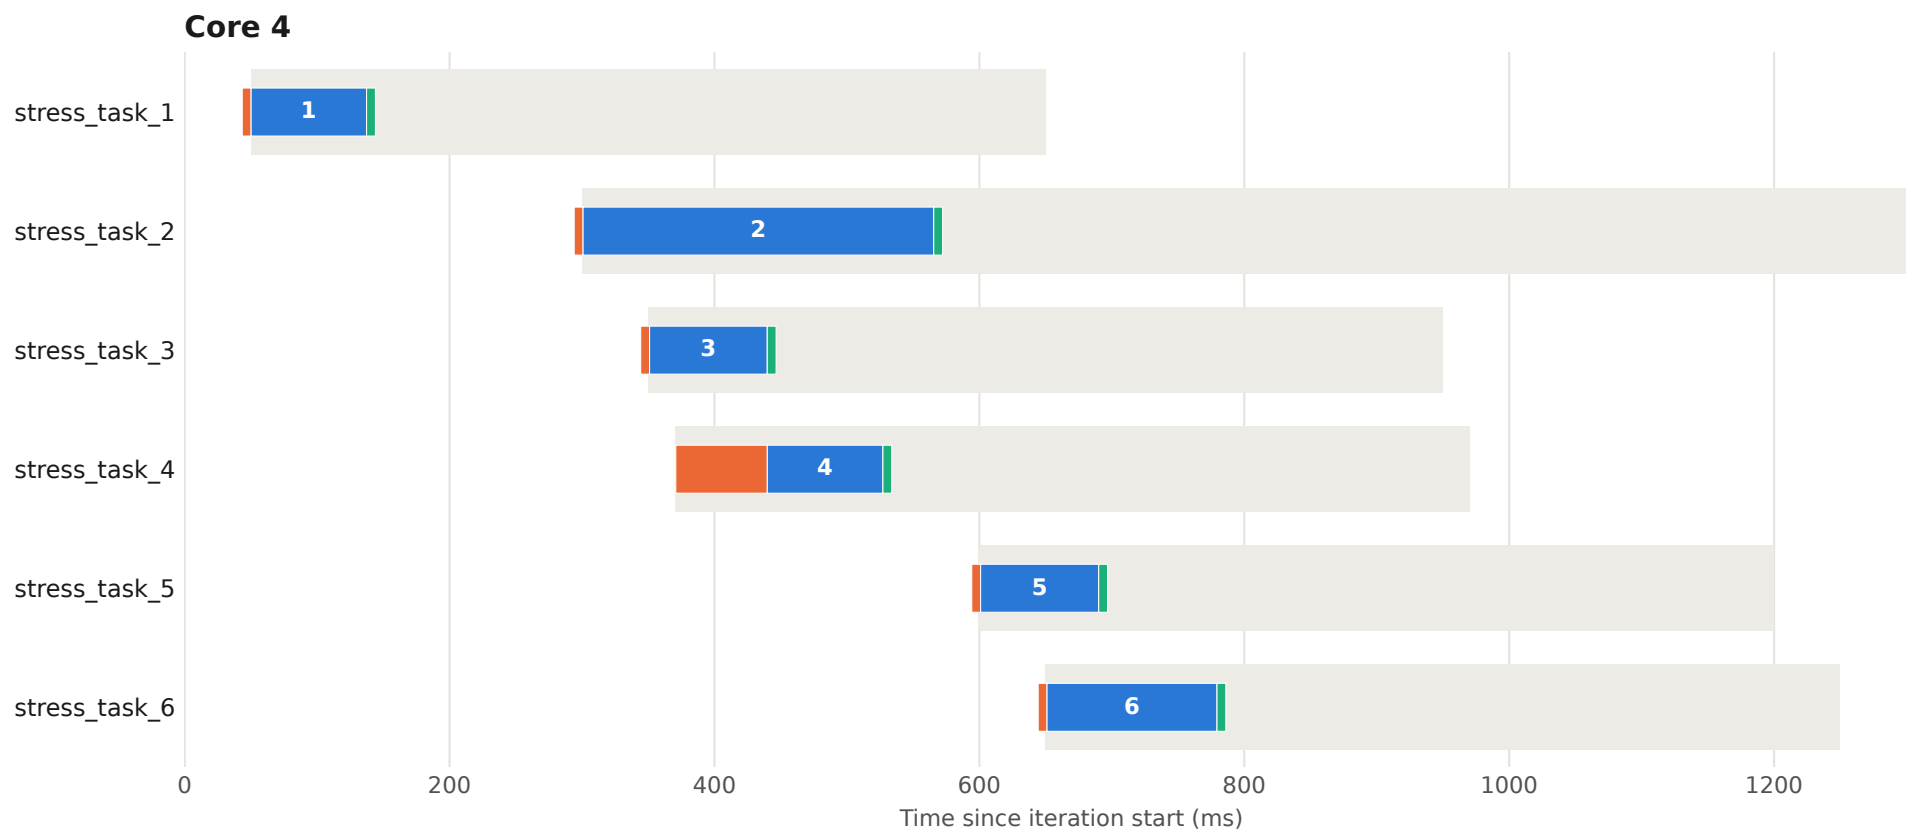


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 57 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

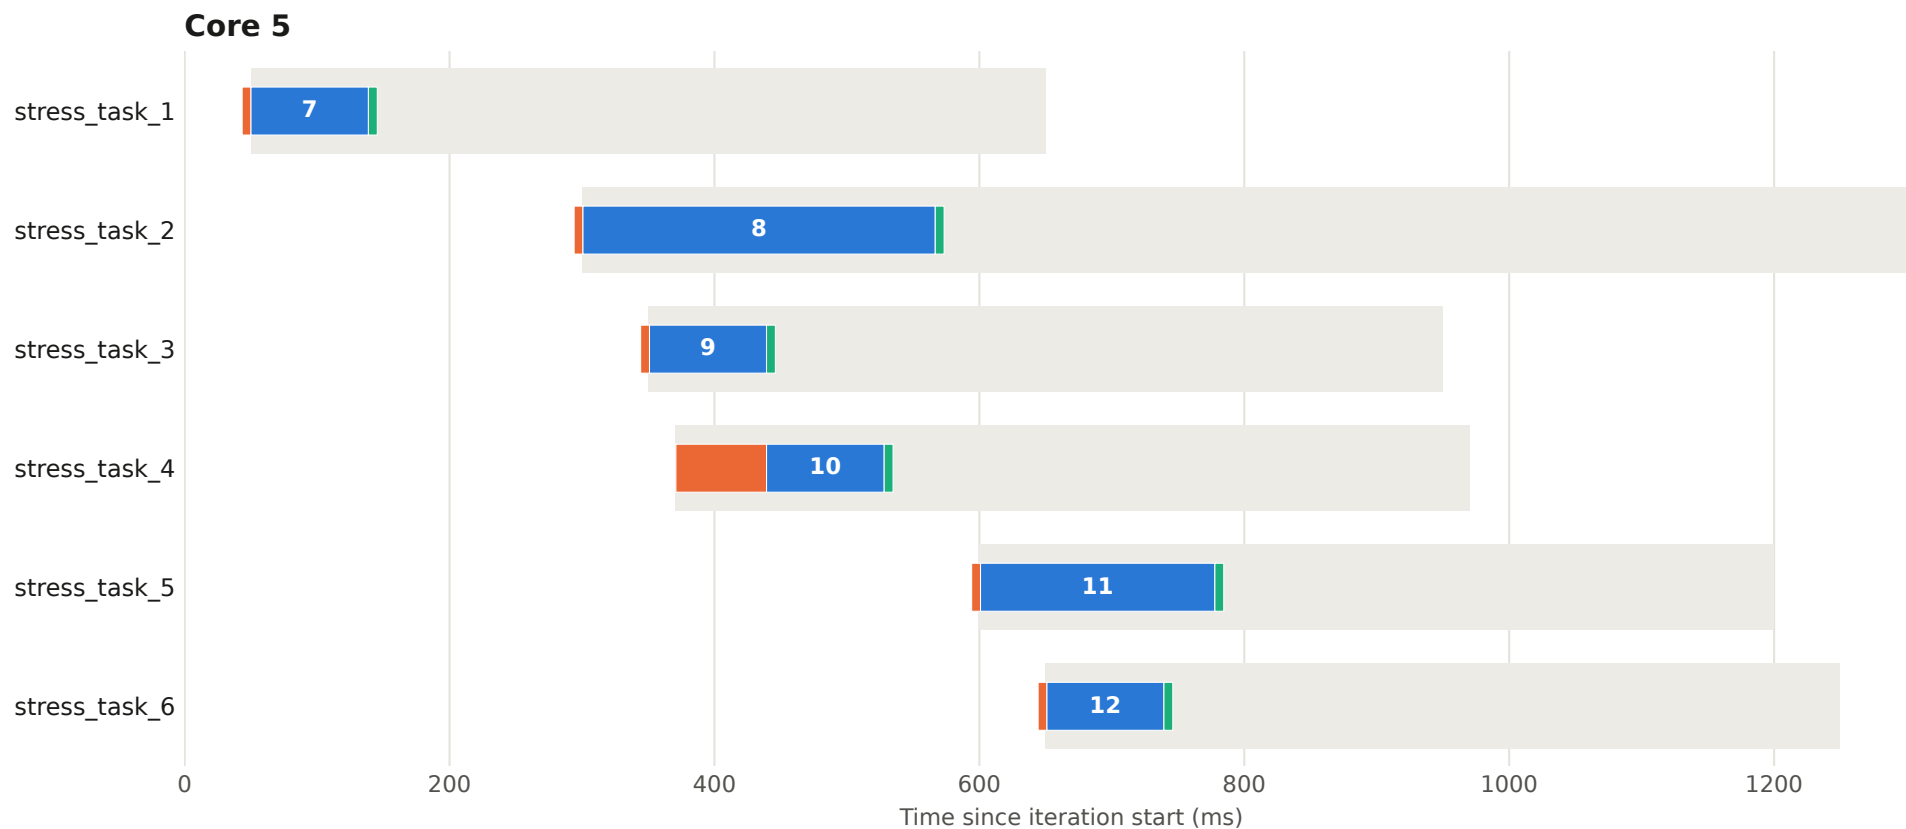


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 57 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

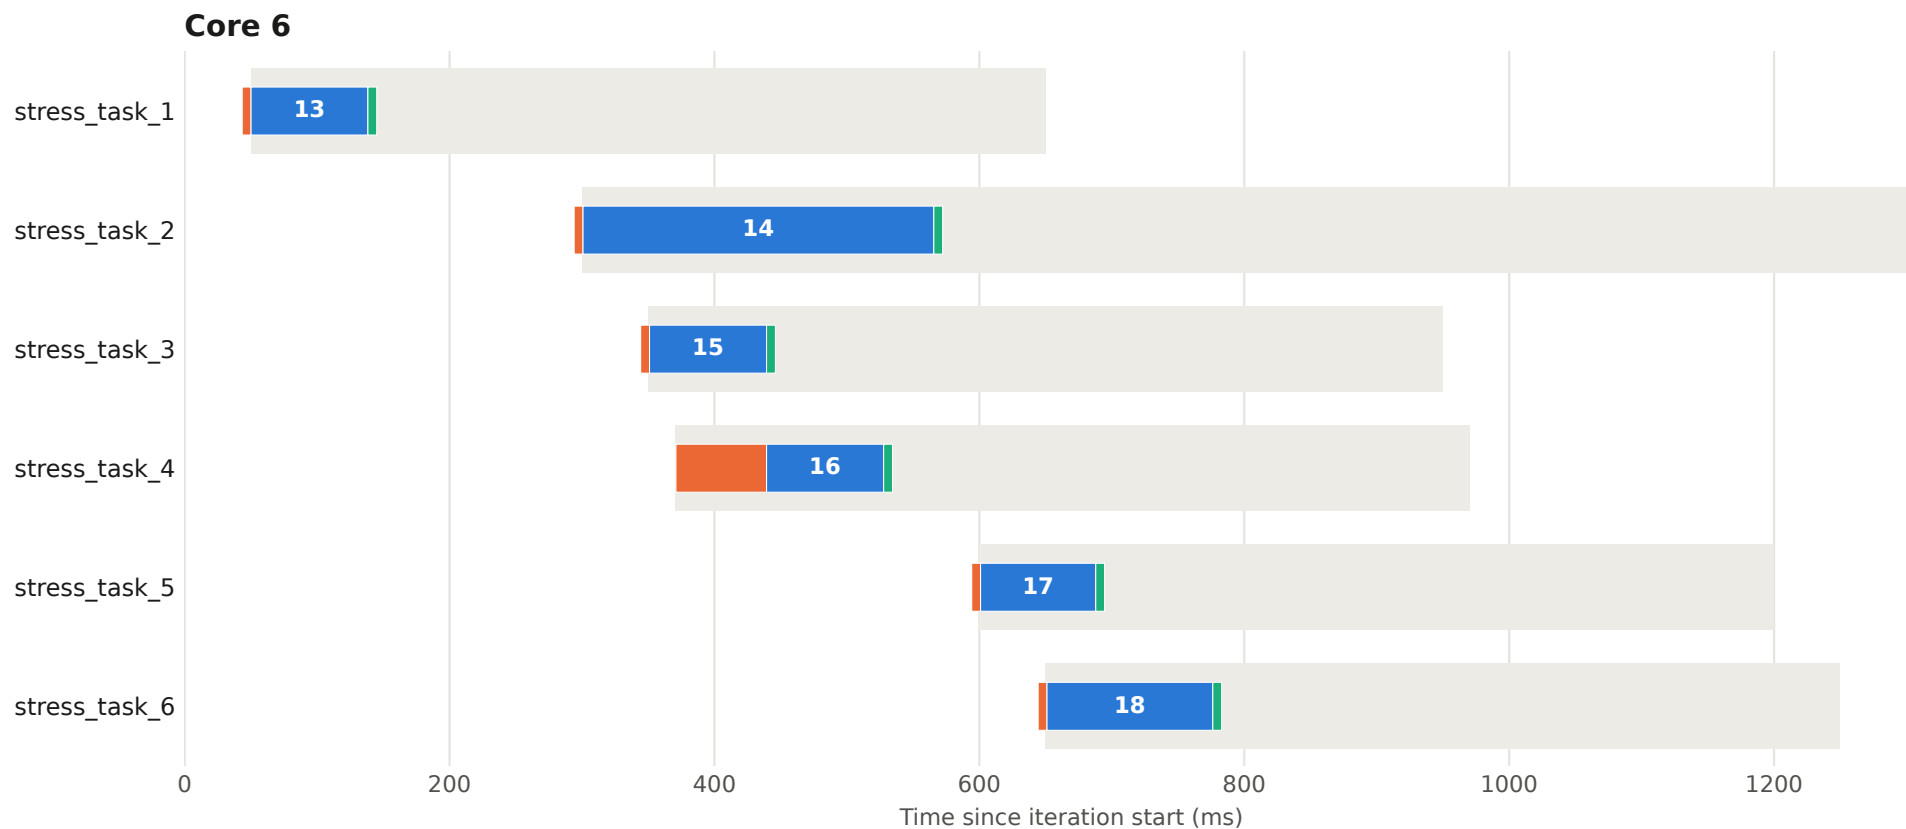


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 57 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

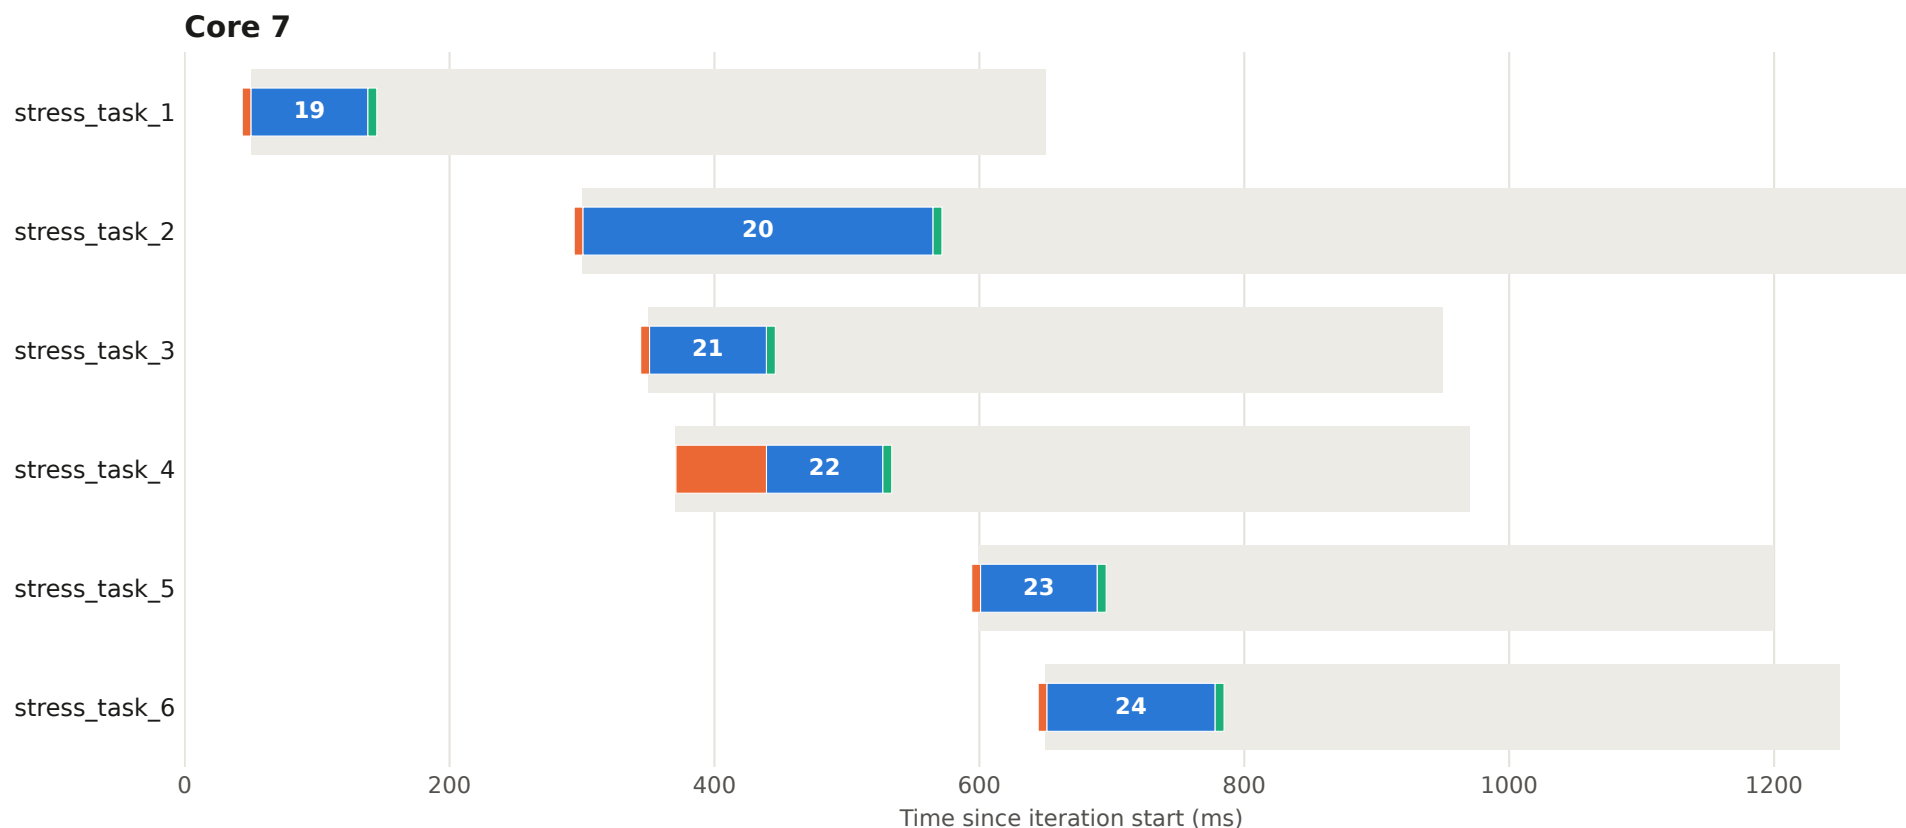


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 58 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

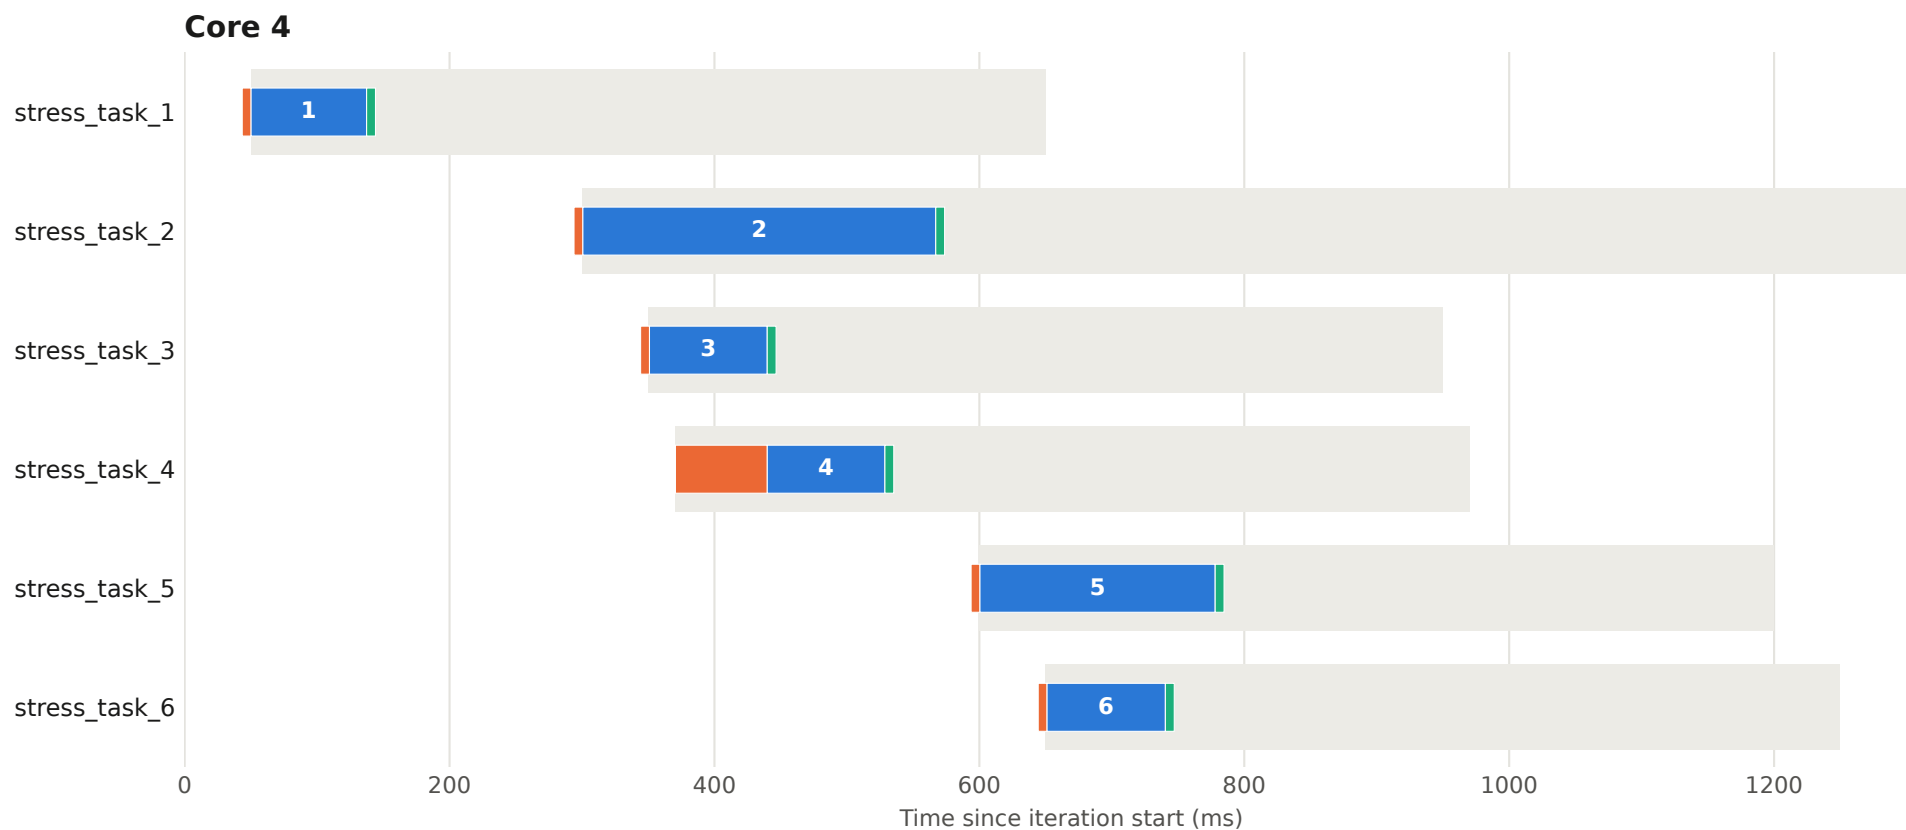


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 58 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

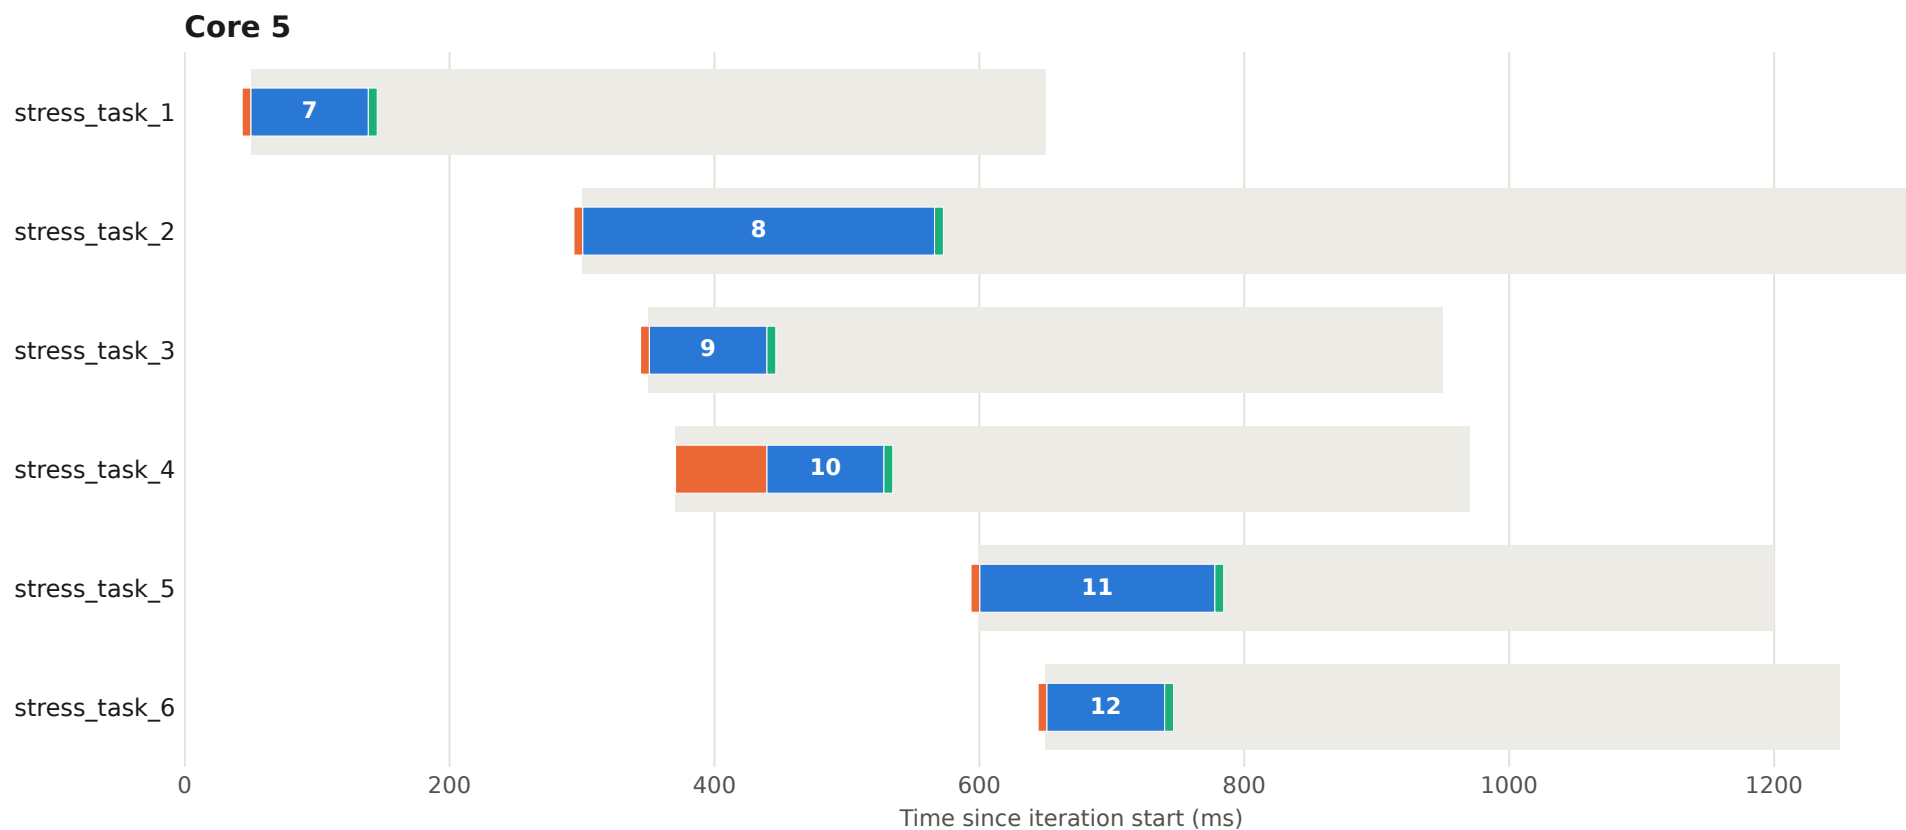


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 58 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

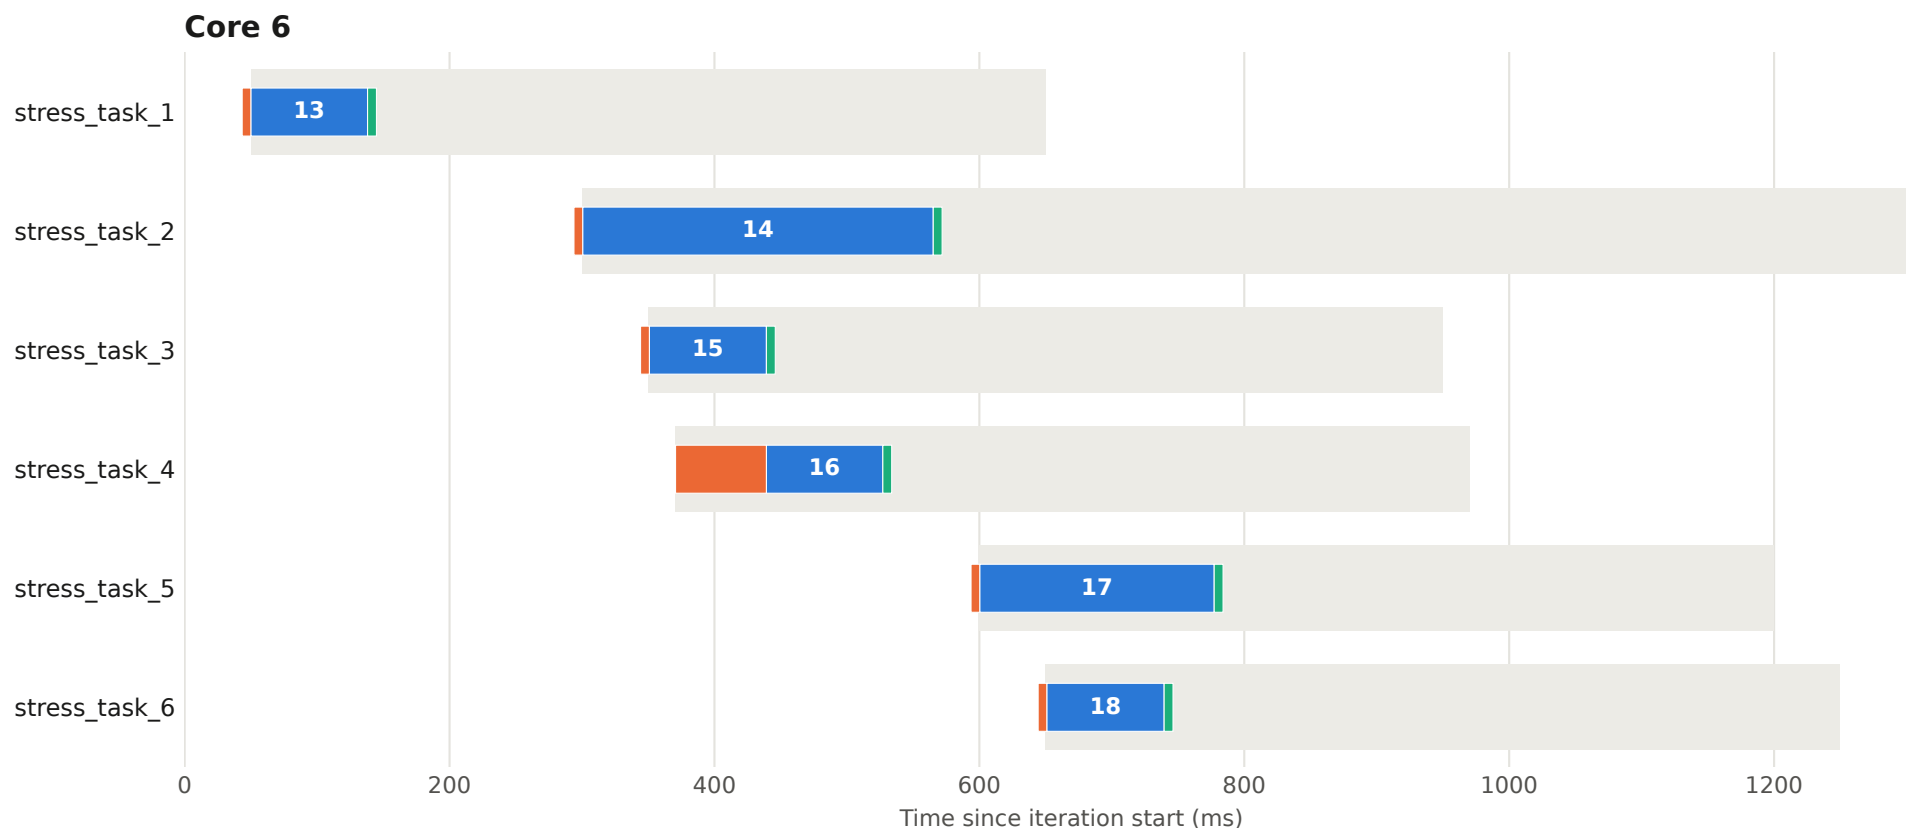


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 58 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

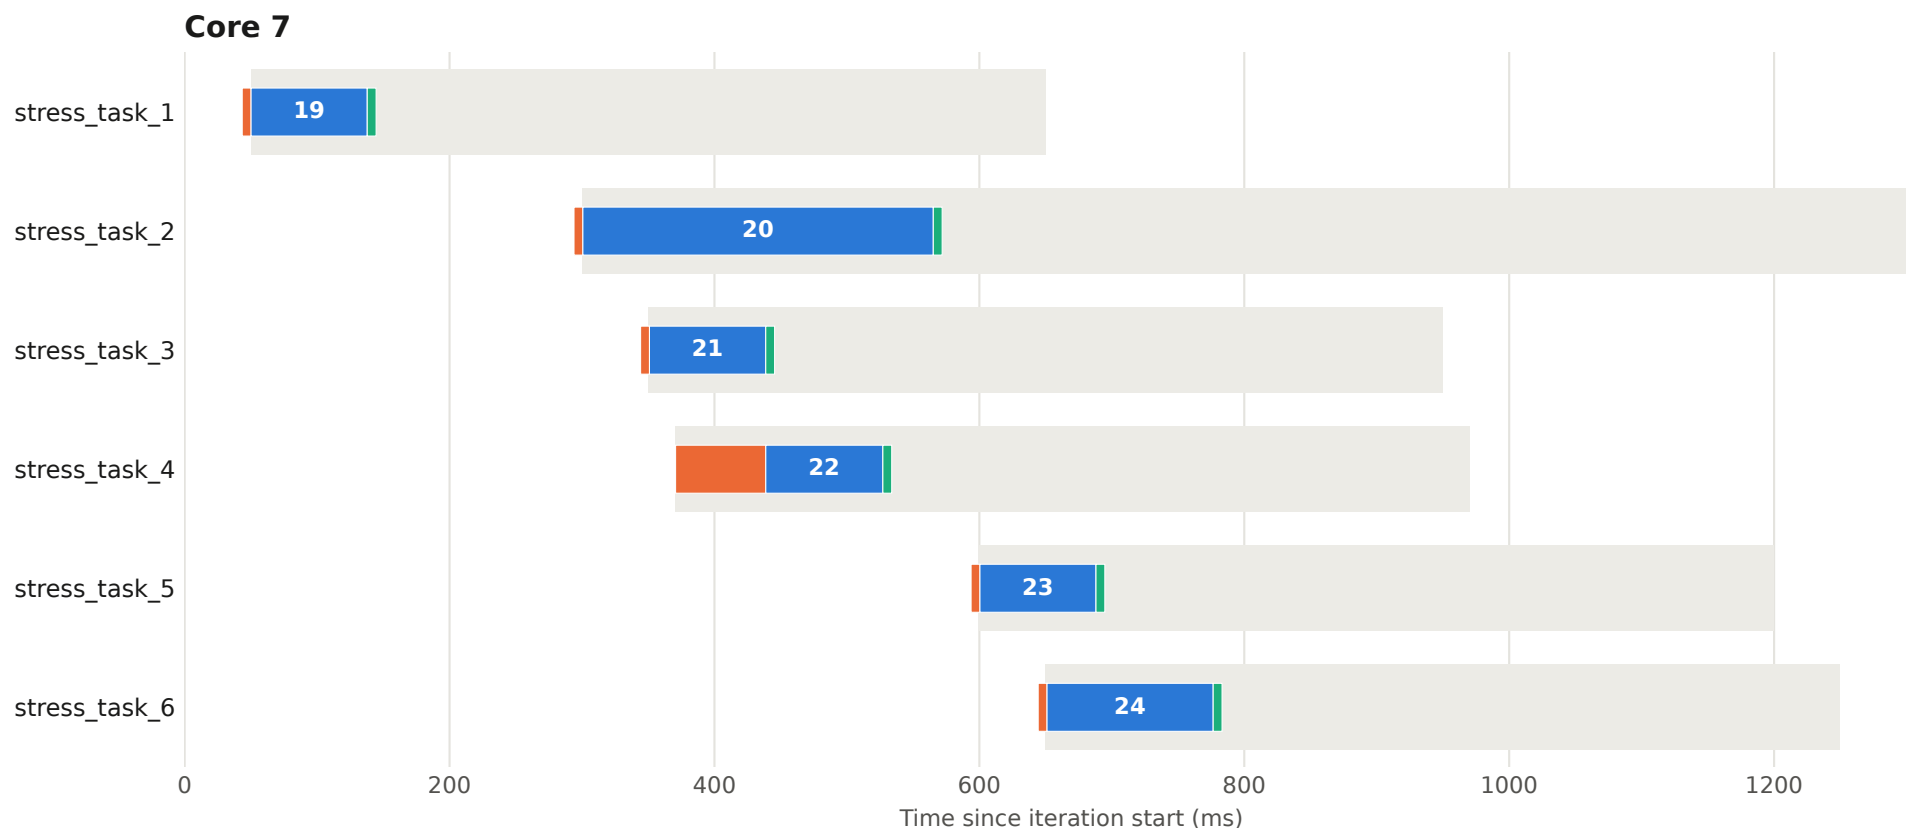


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 59 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

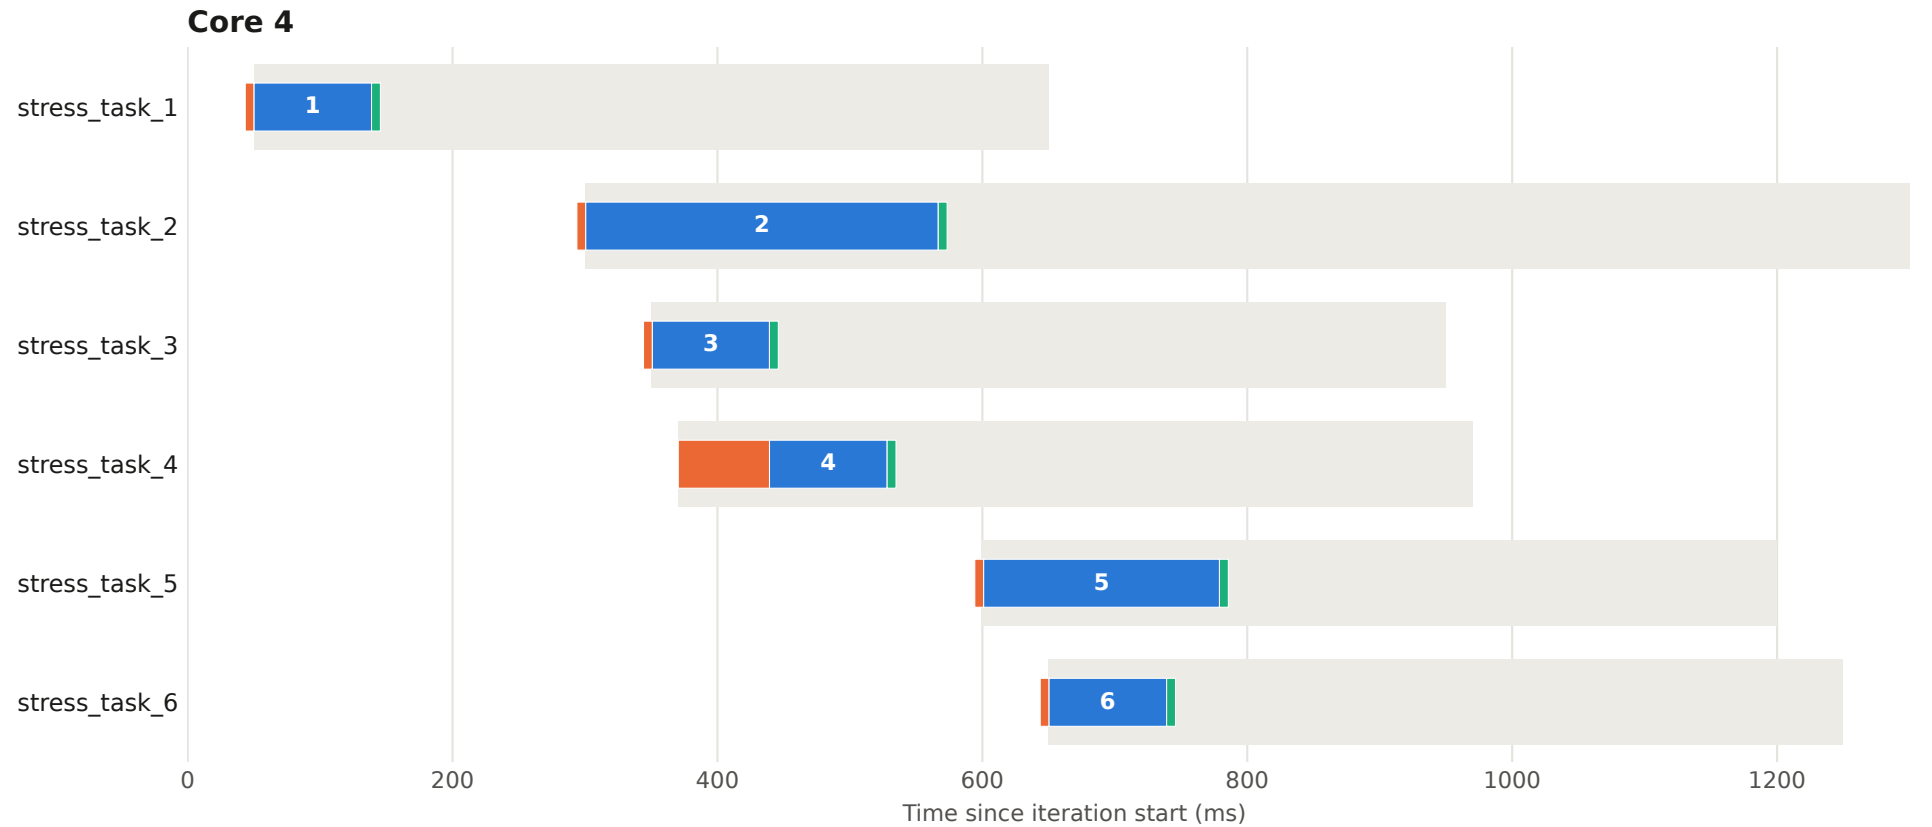


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 59 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

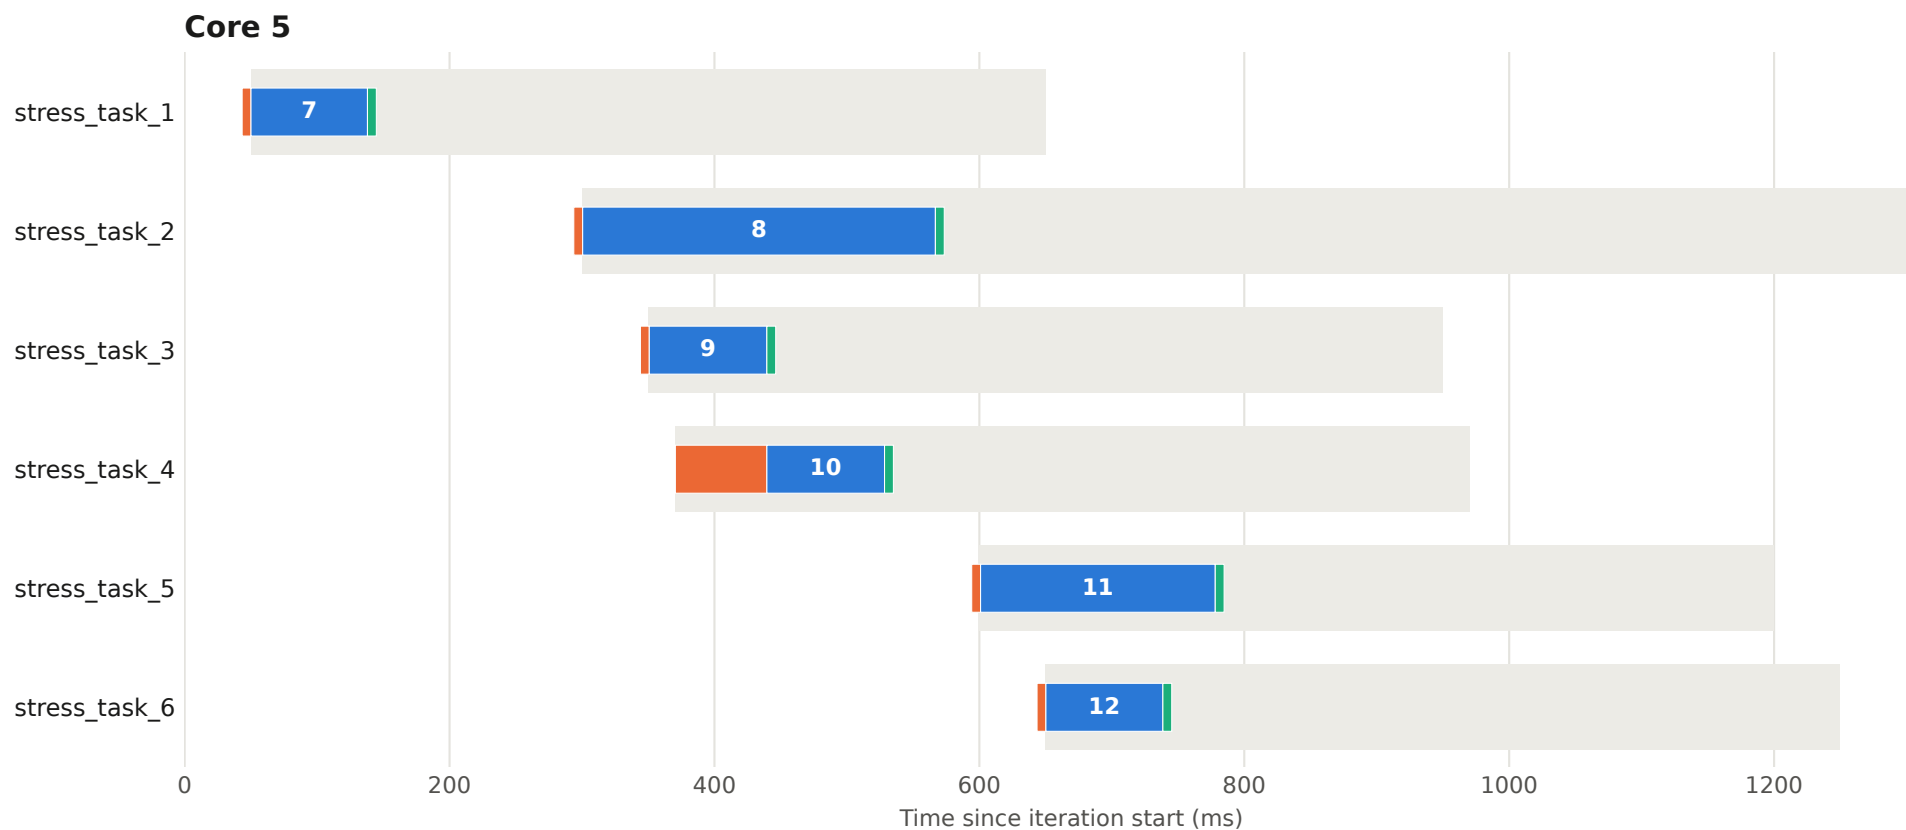


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 59 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

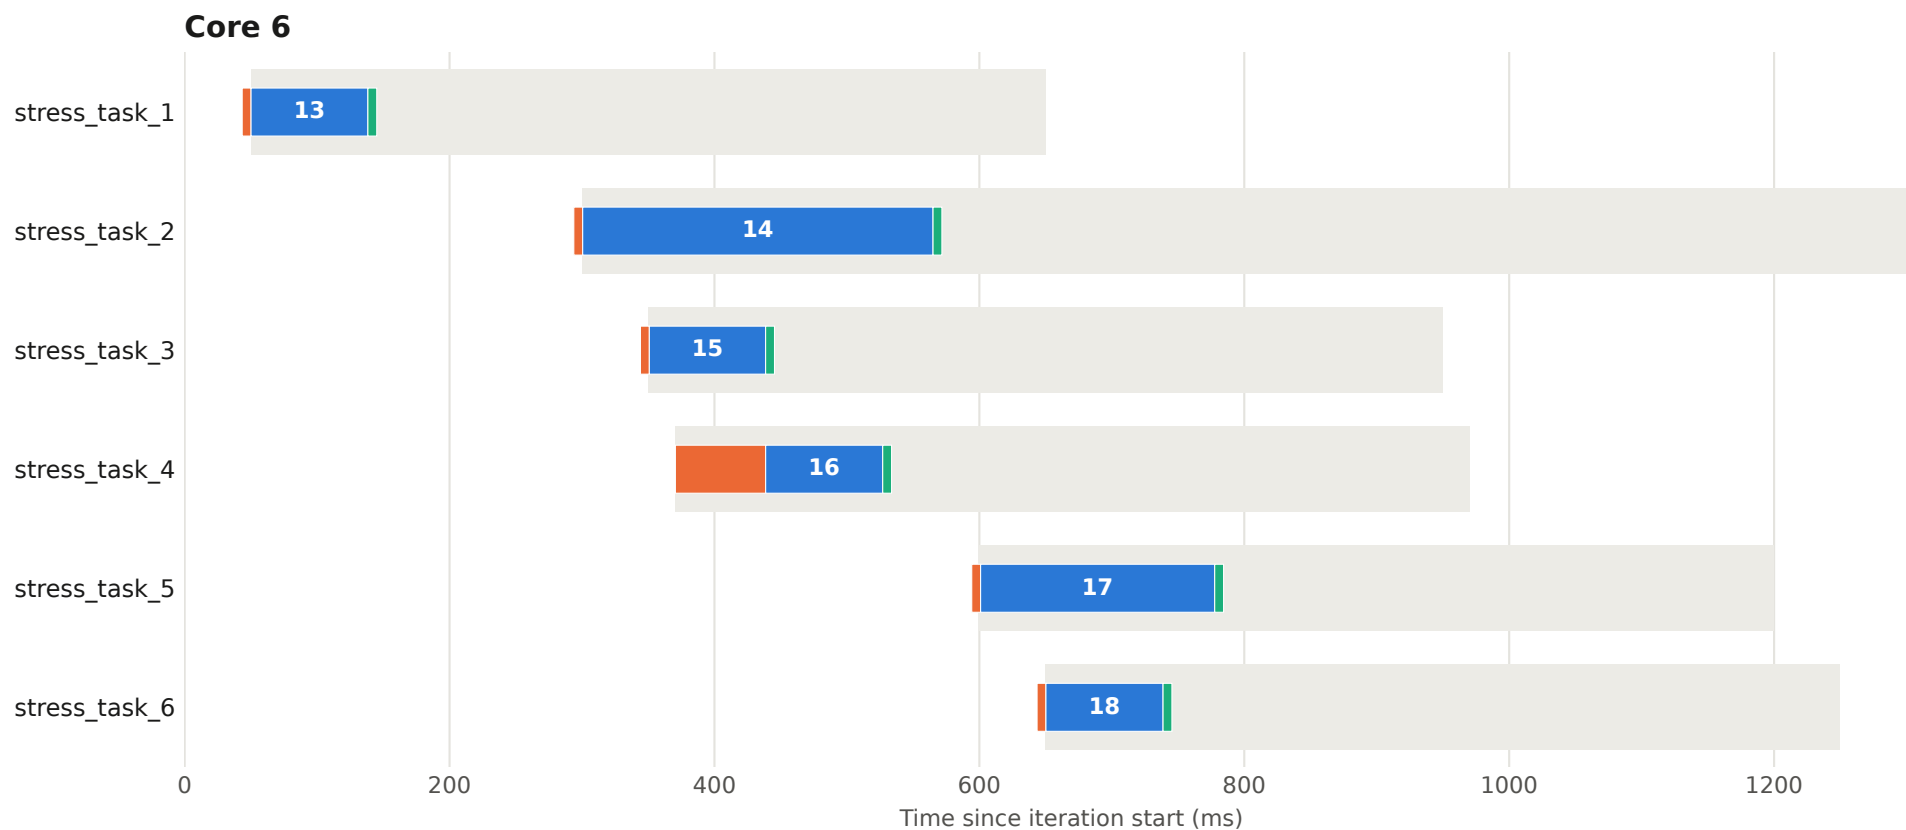


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 59 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

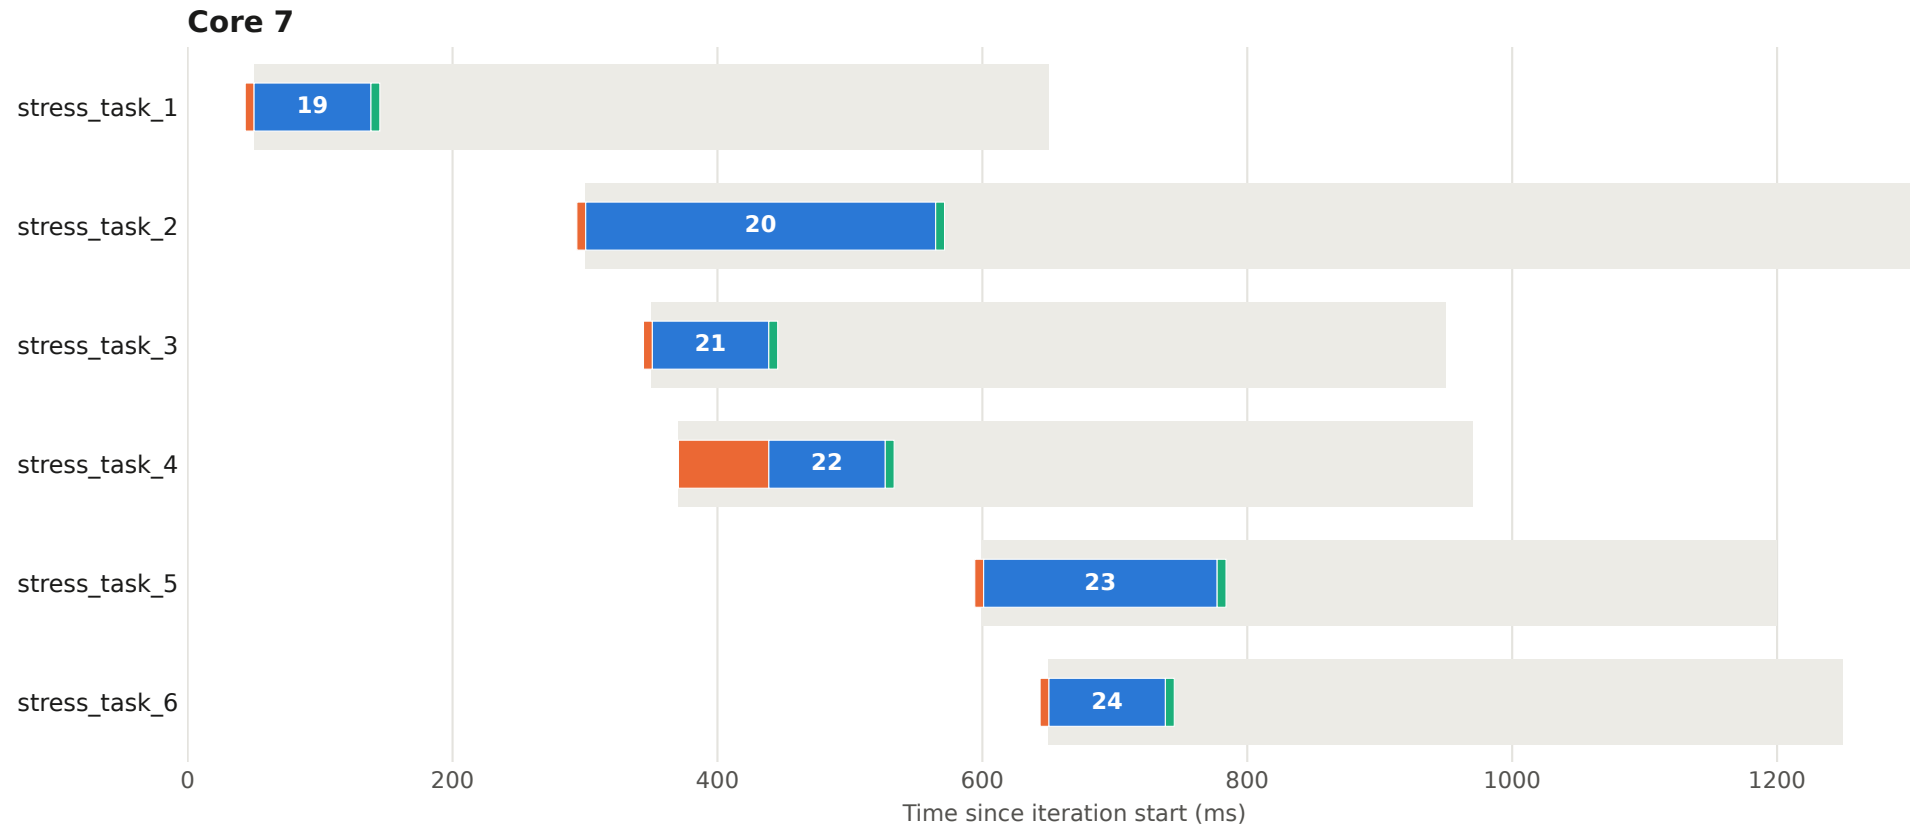


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 60 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

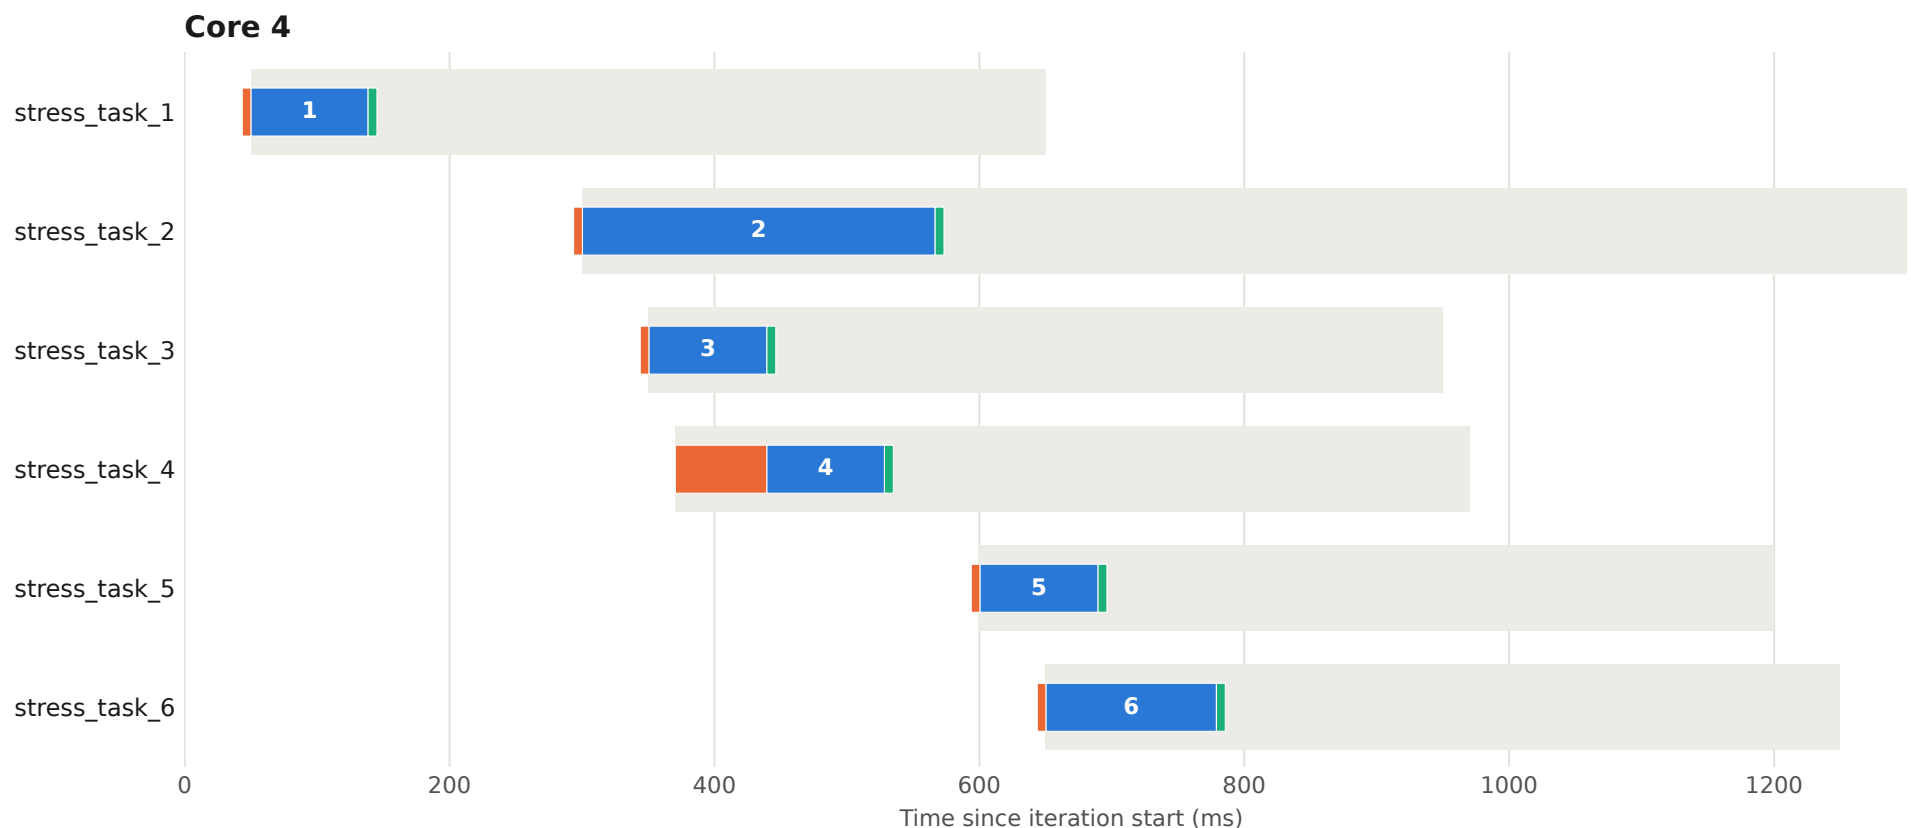


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 60 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

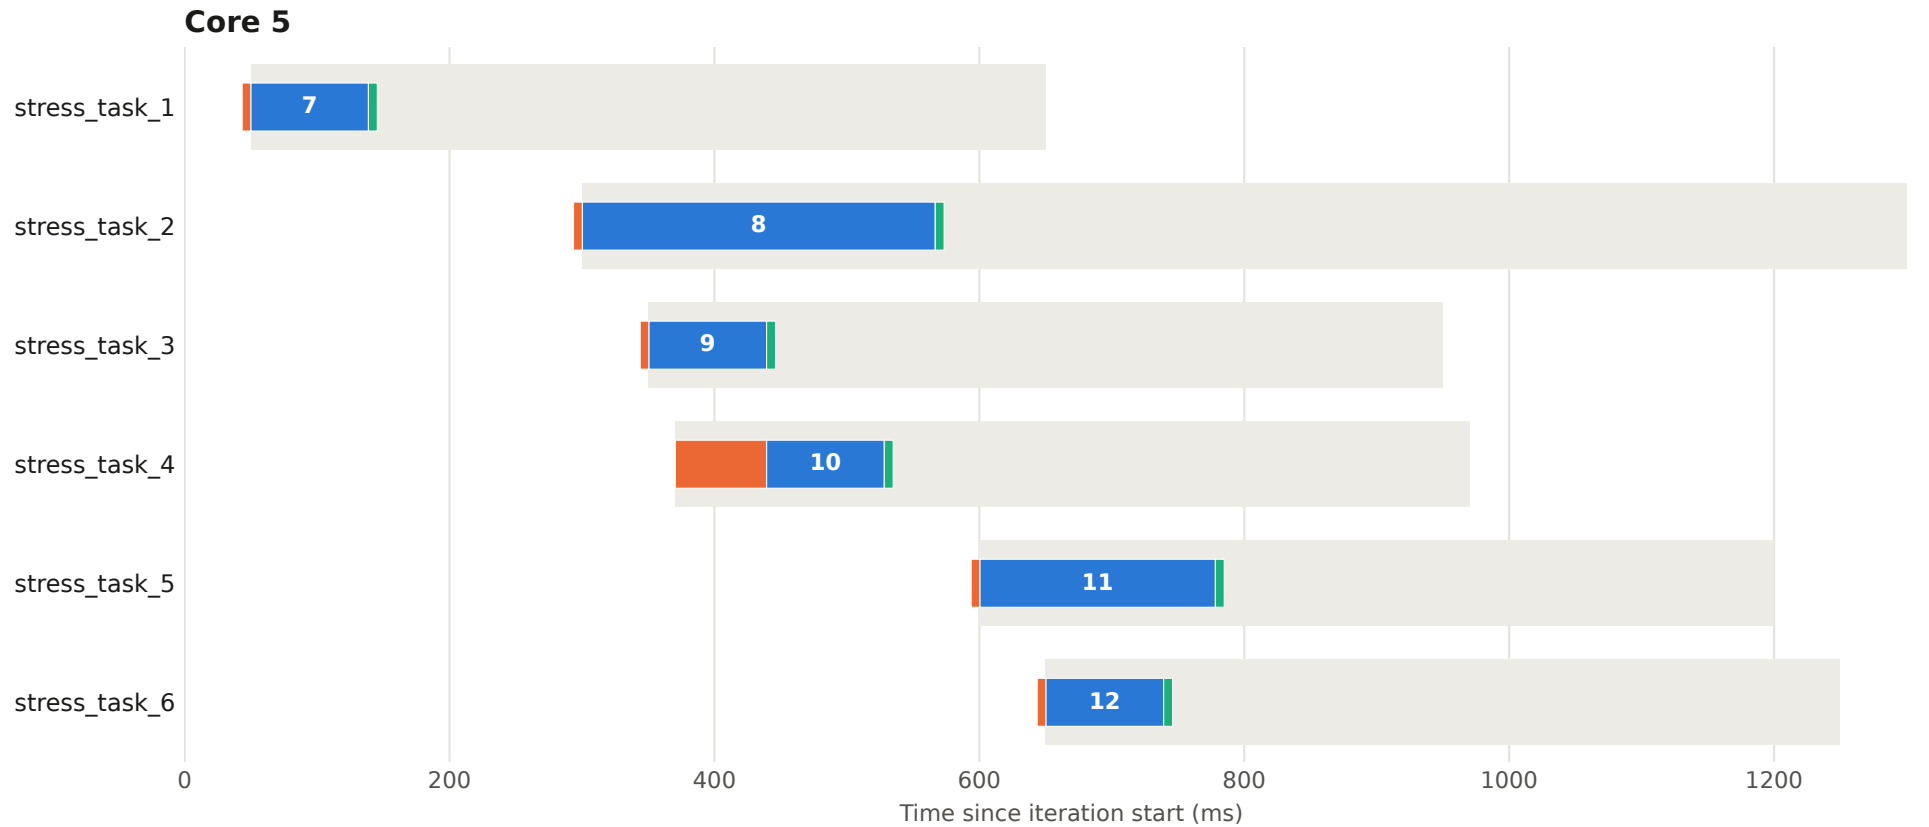


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 60 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

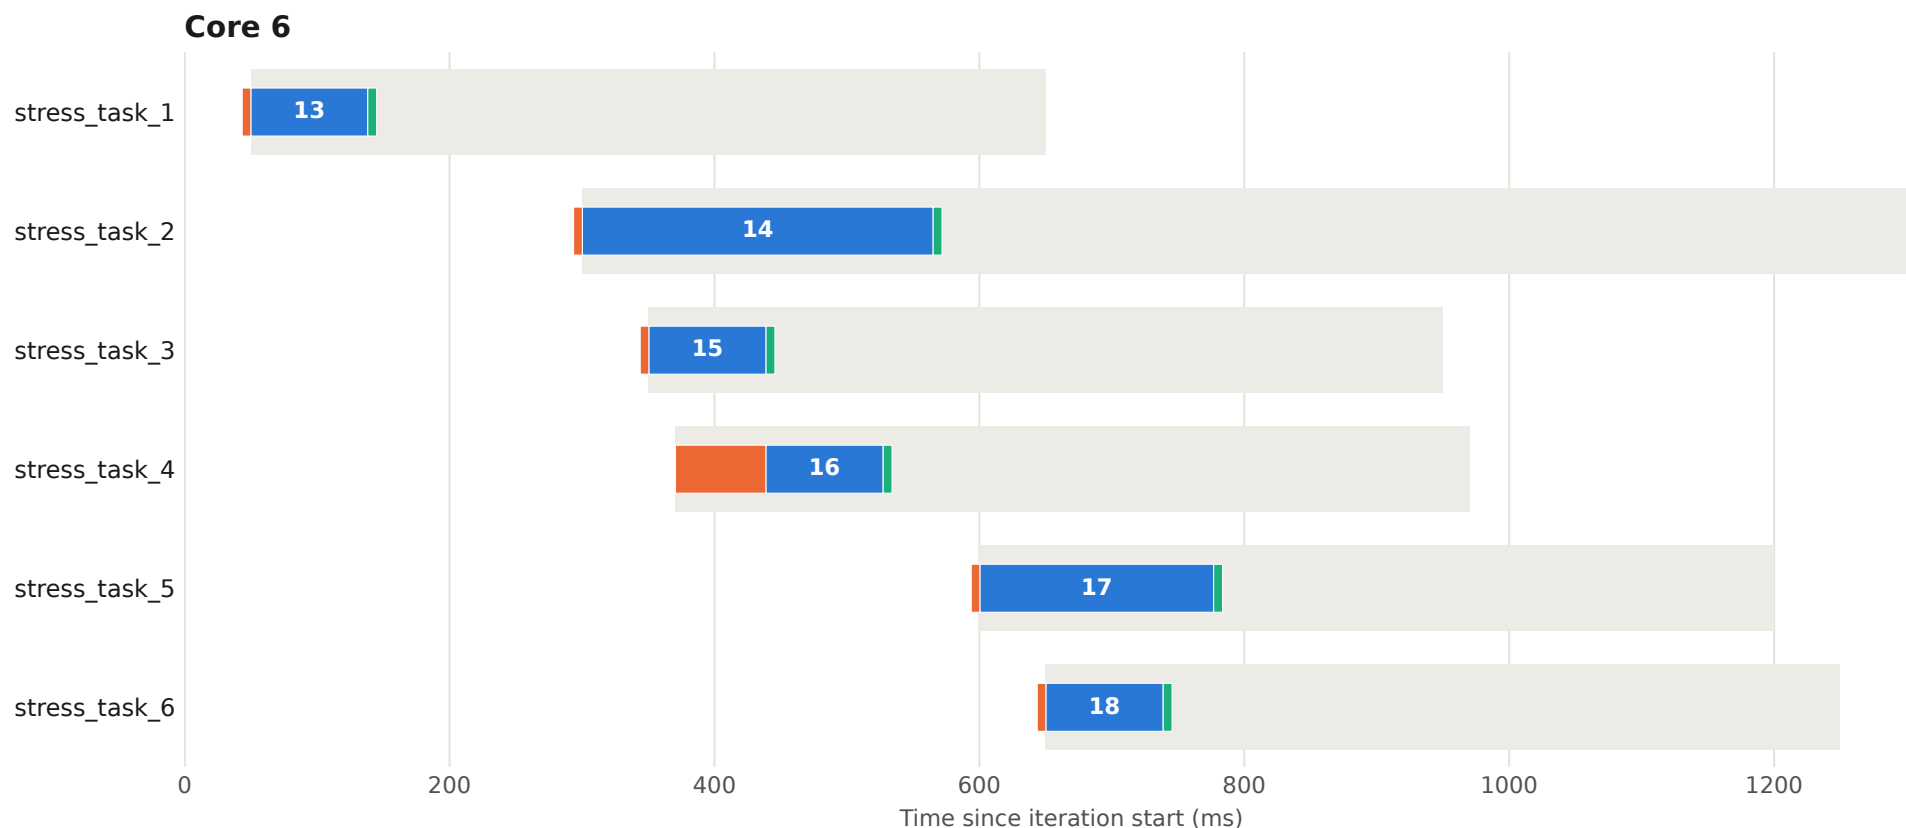


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 60 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

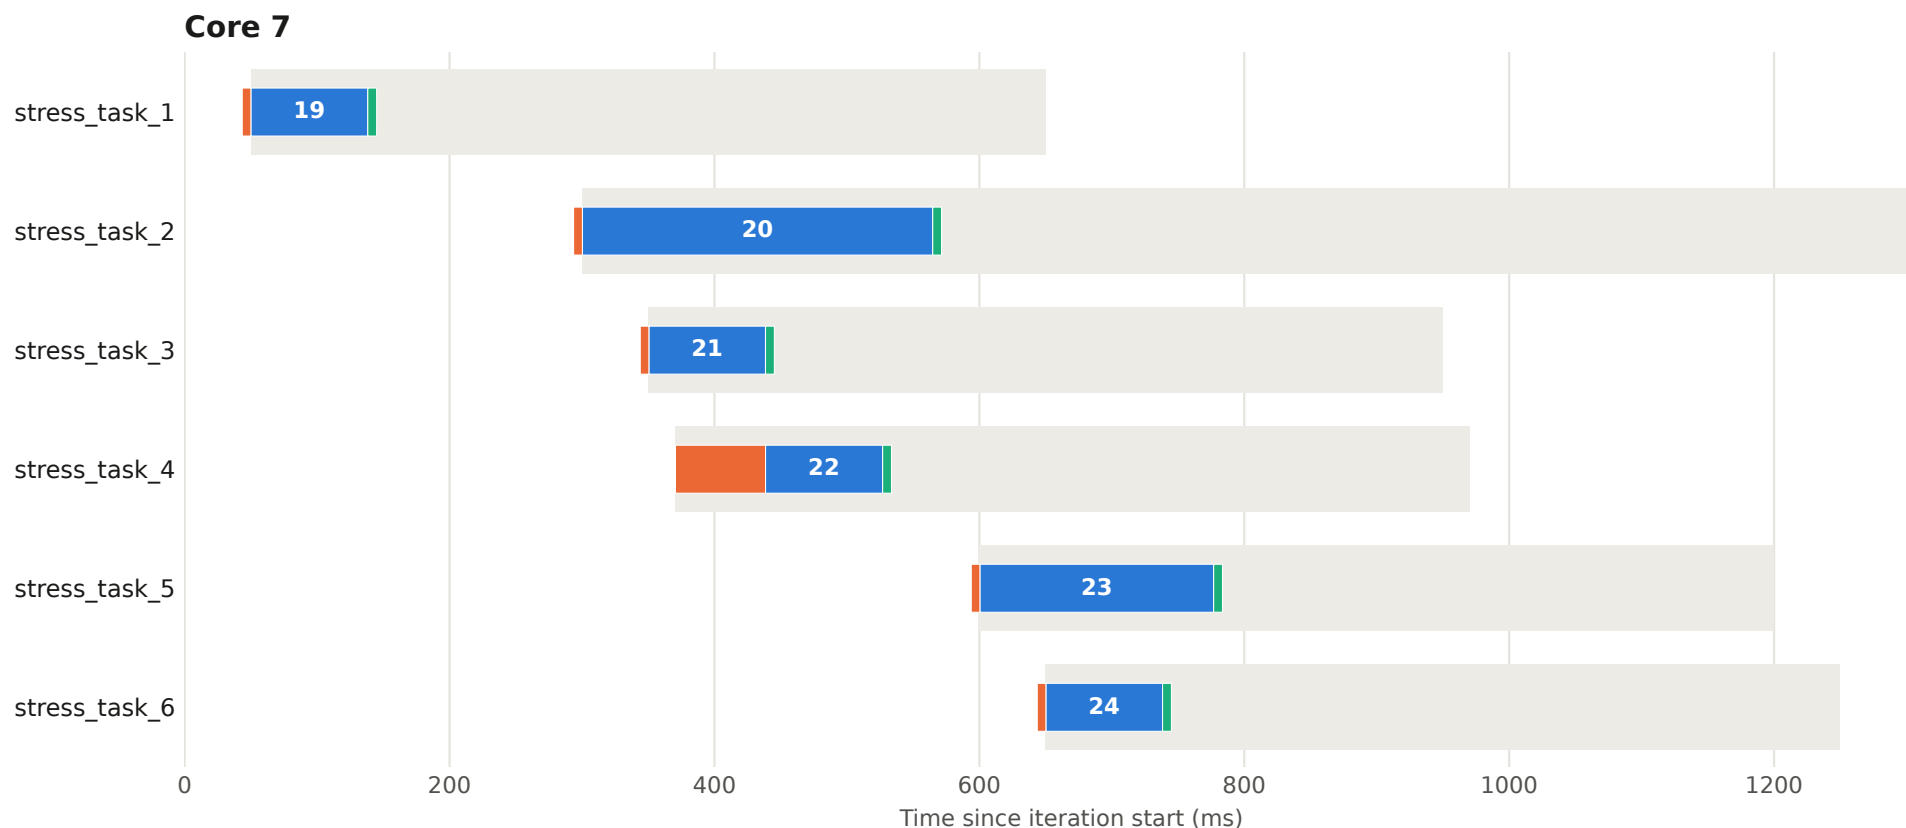


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 61 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

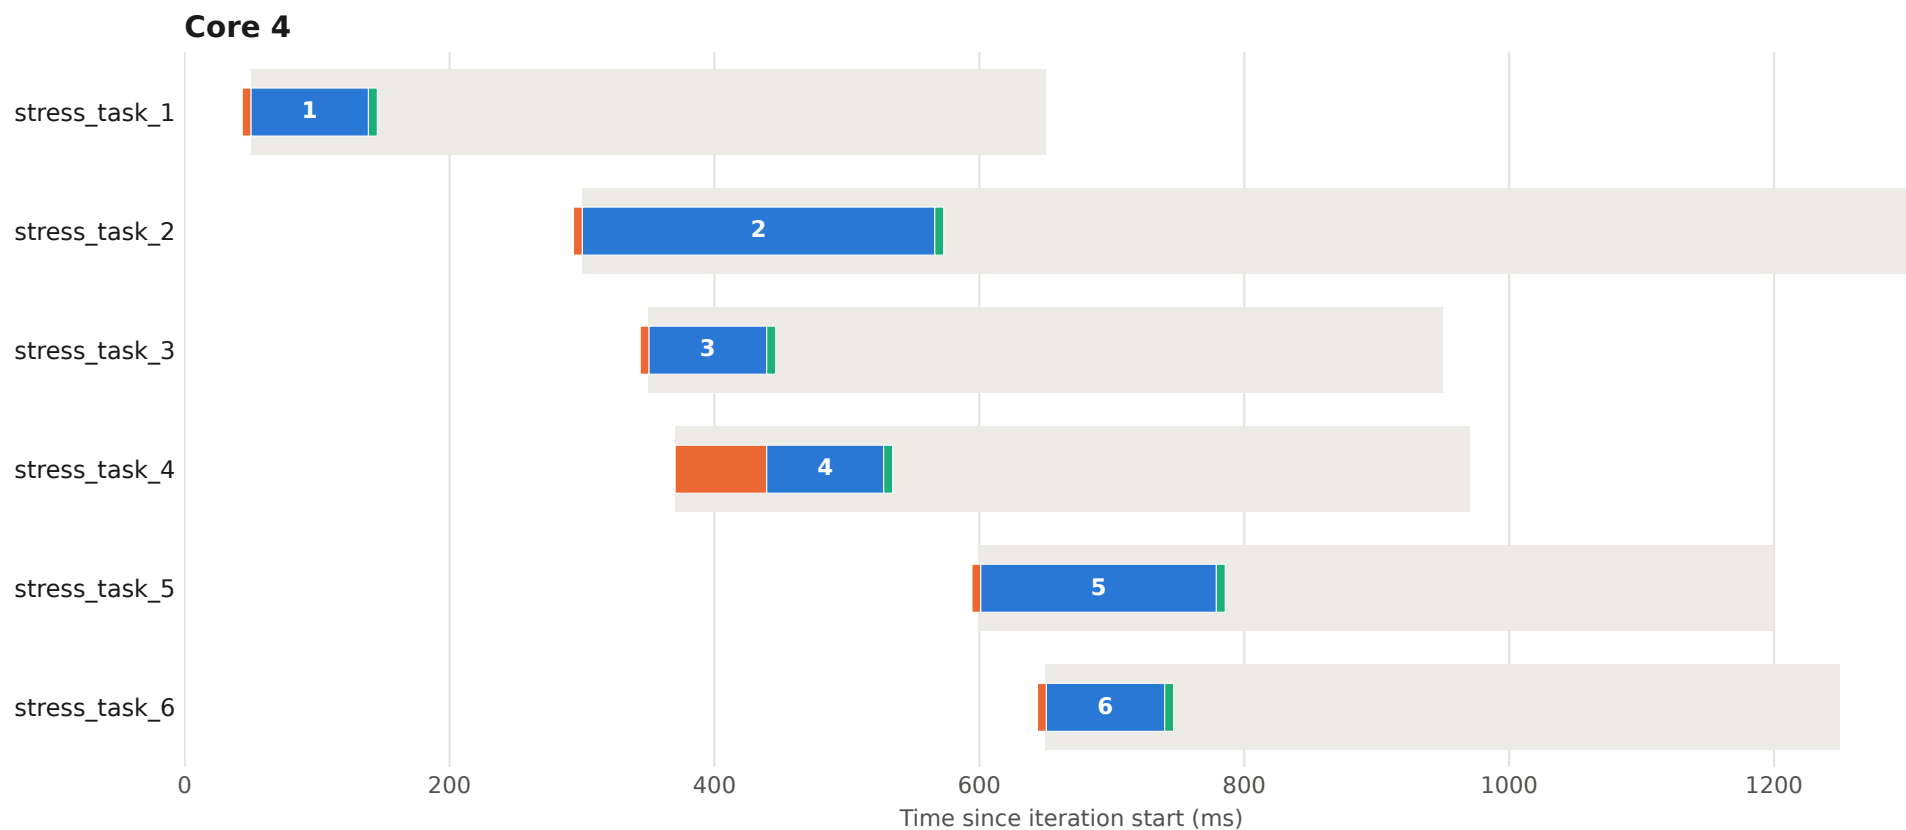


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 61 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

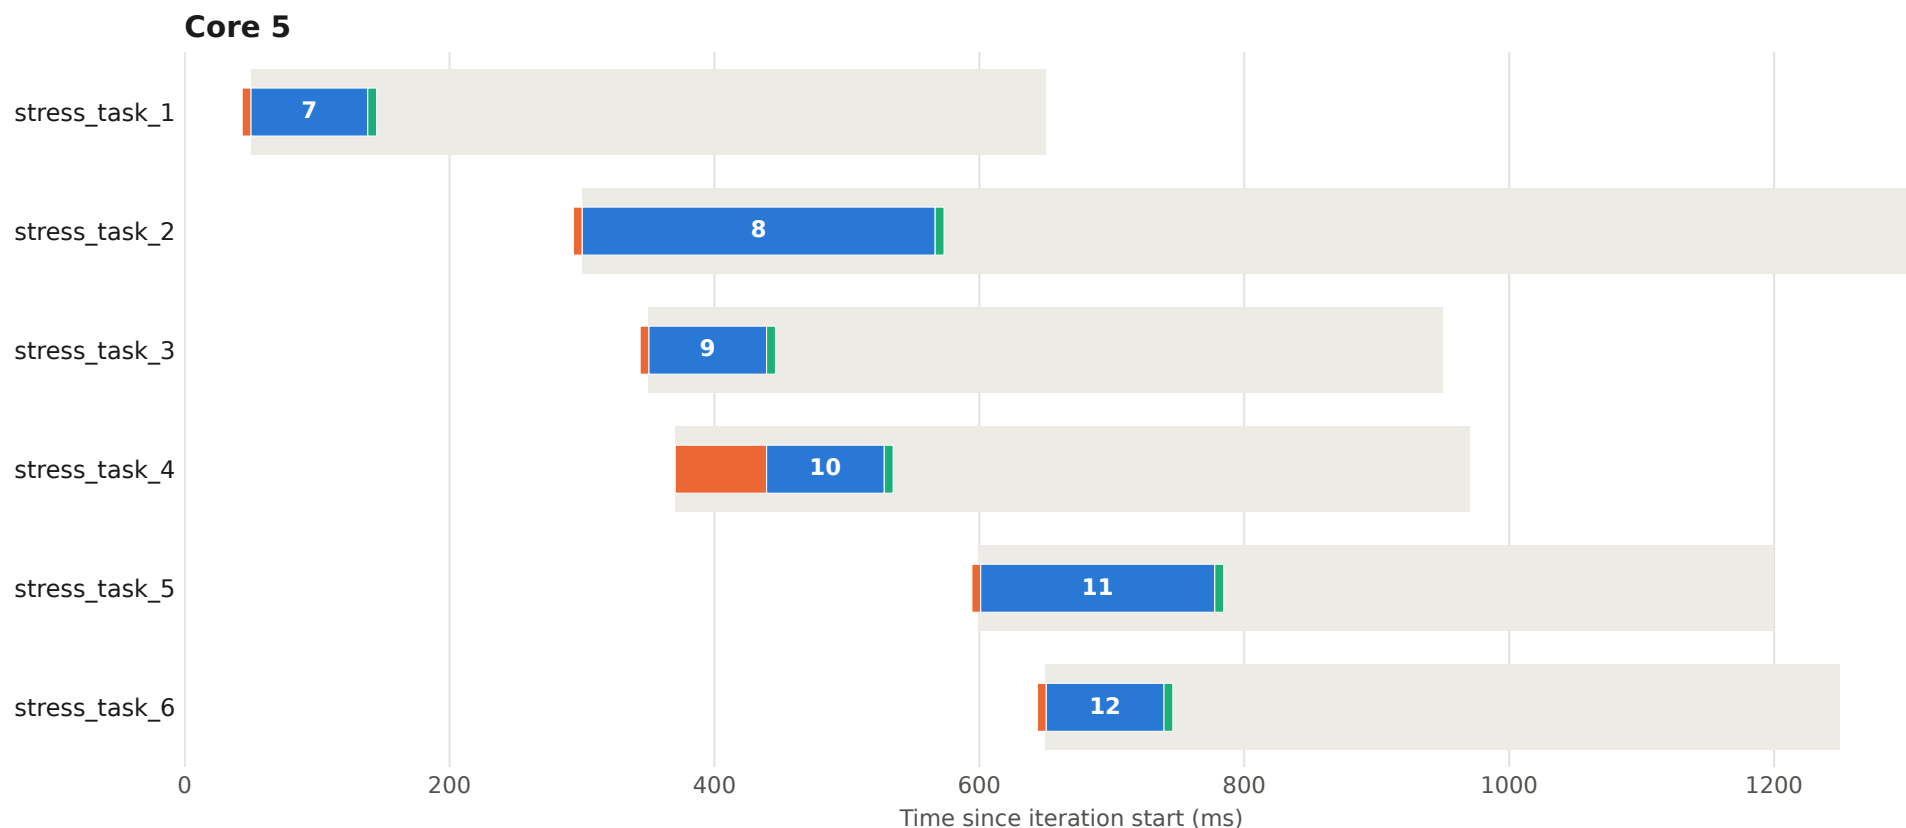


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 61 - core 6

One chart per core; each bar is one task call.


- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

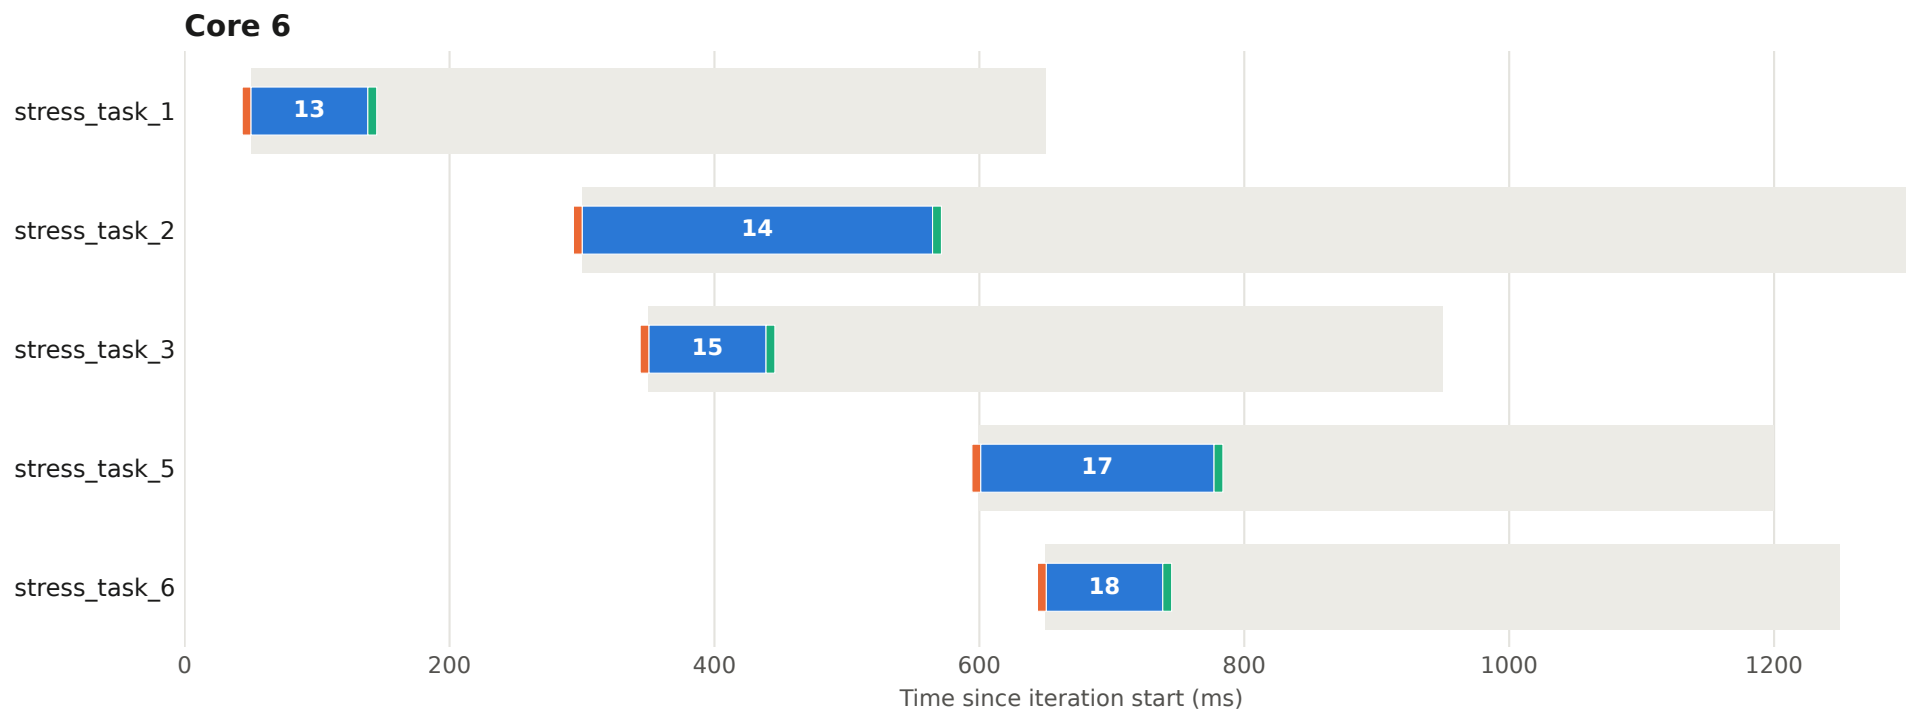

# Execution plan - iteration 61 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

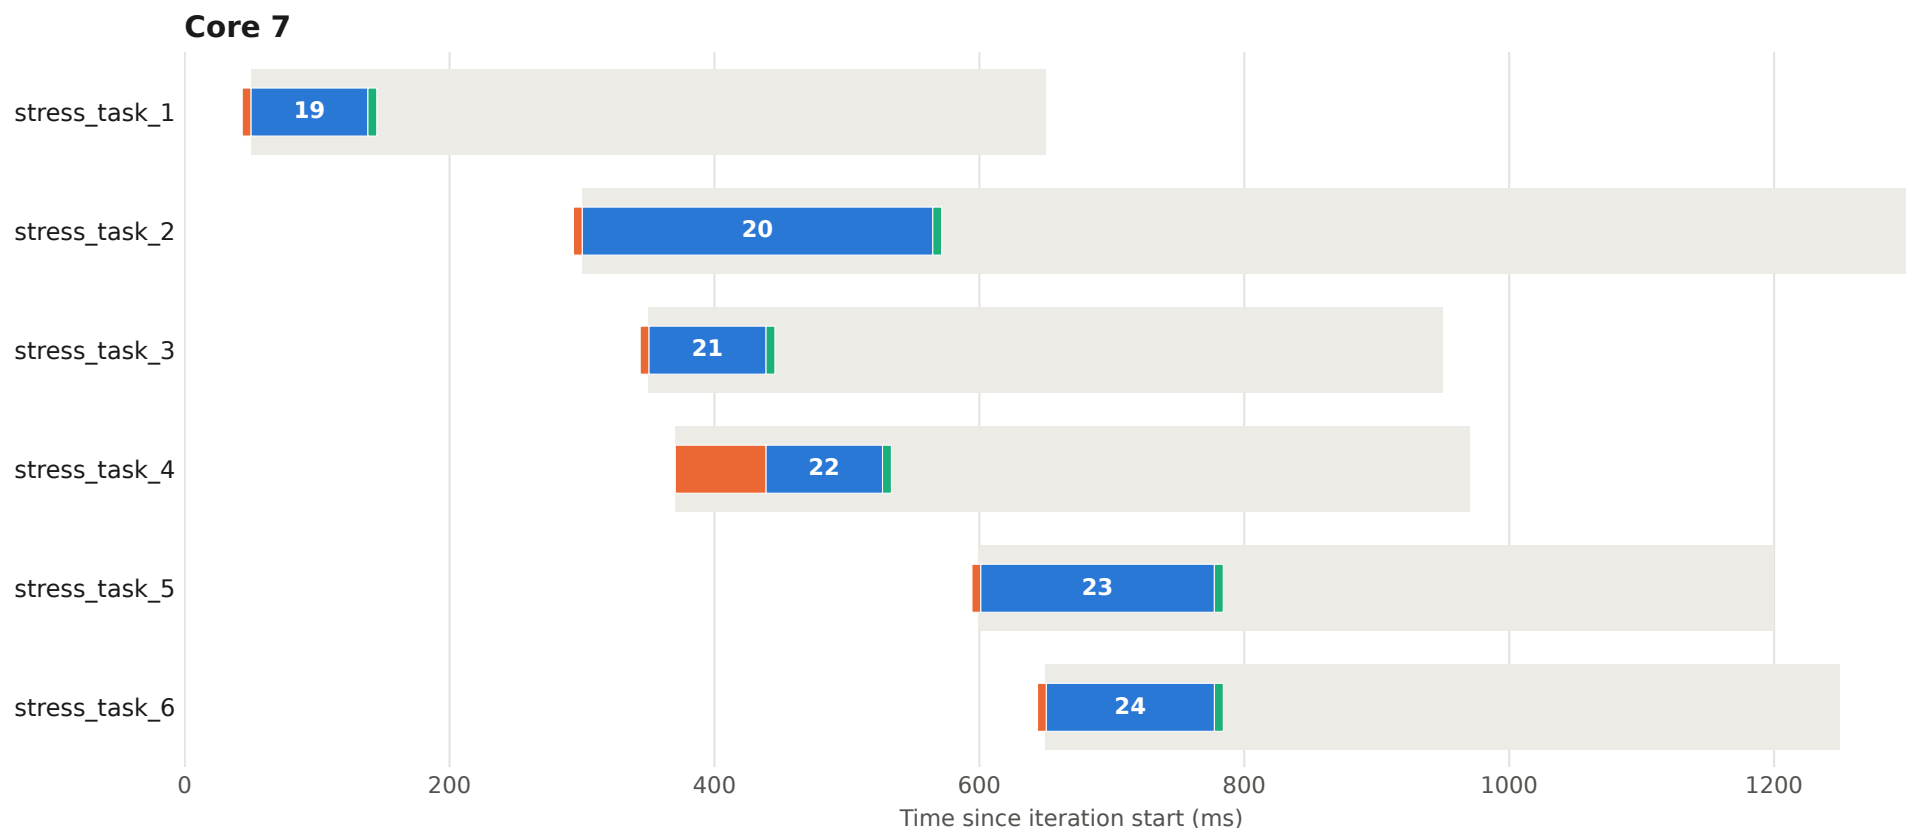


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 62 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

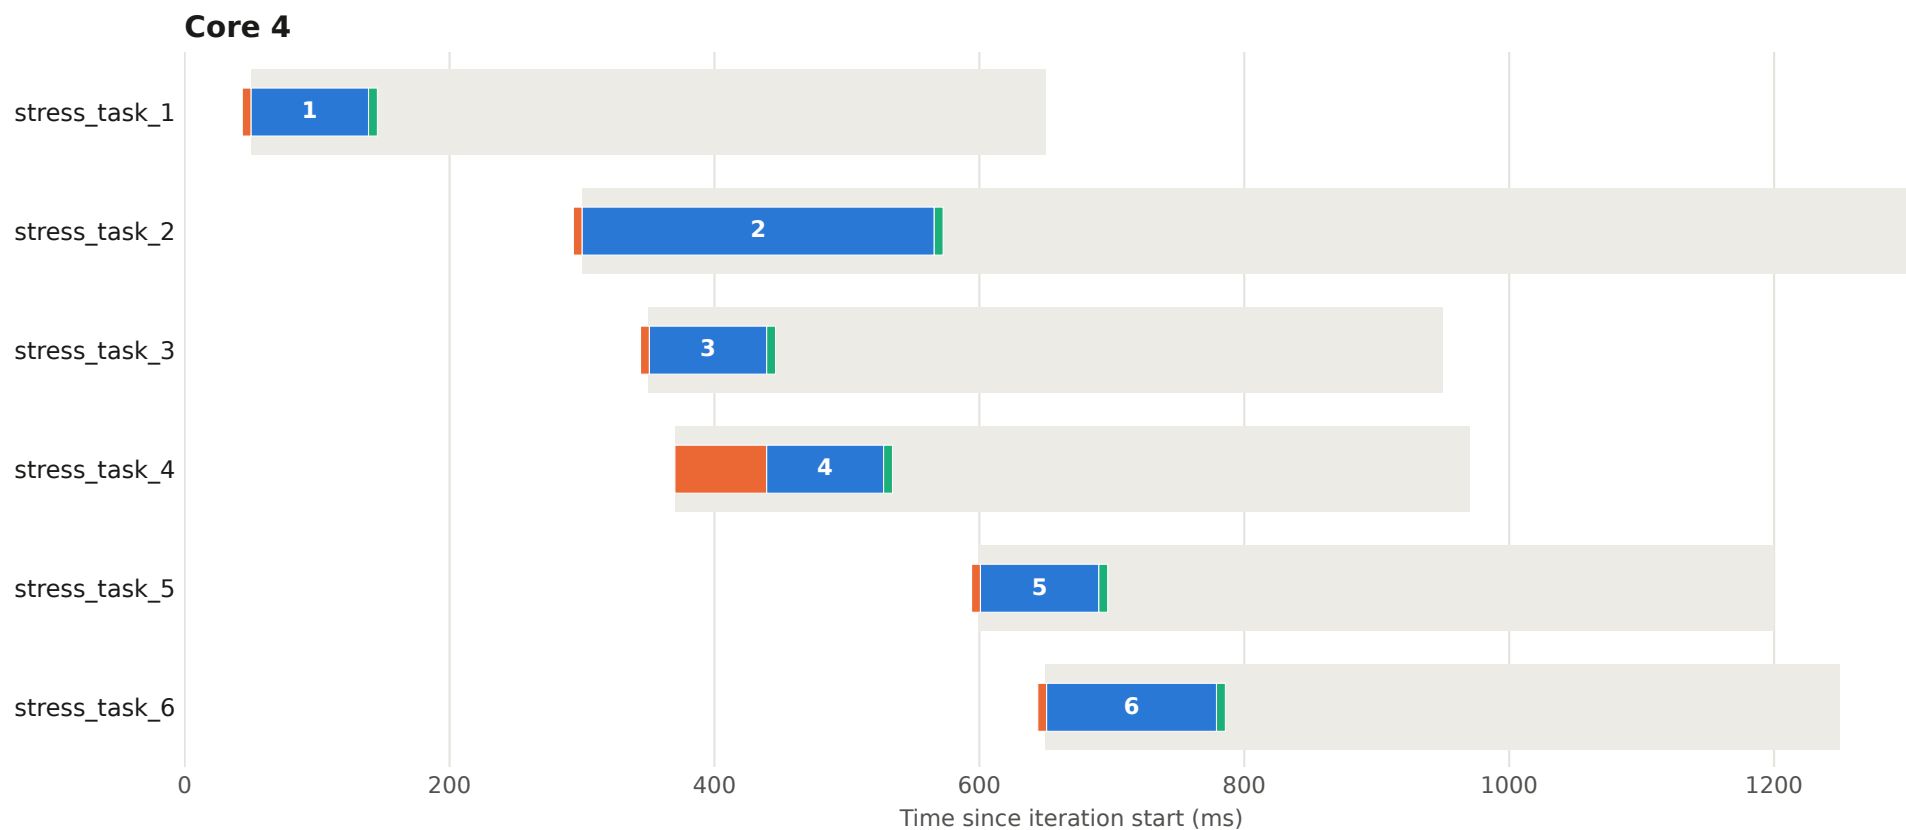


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 62 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

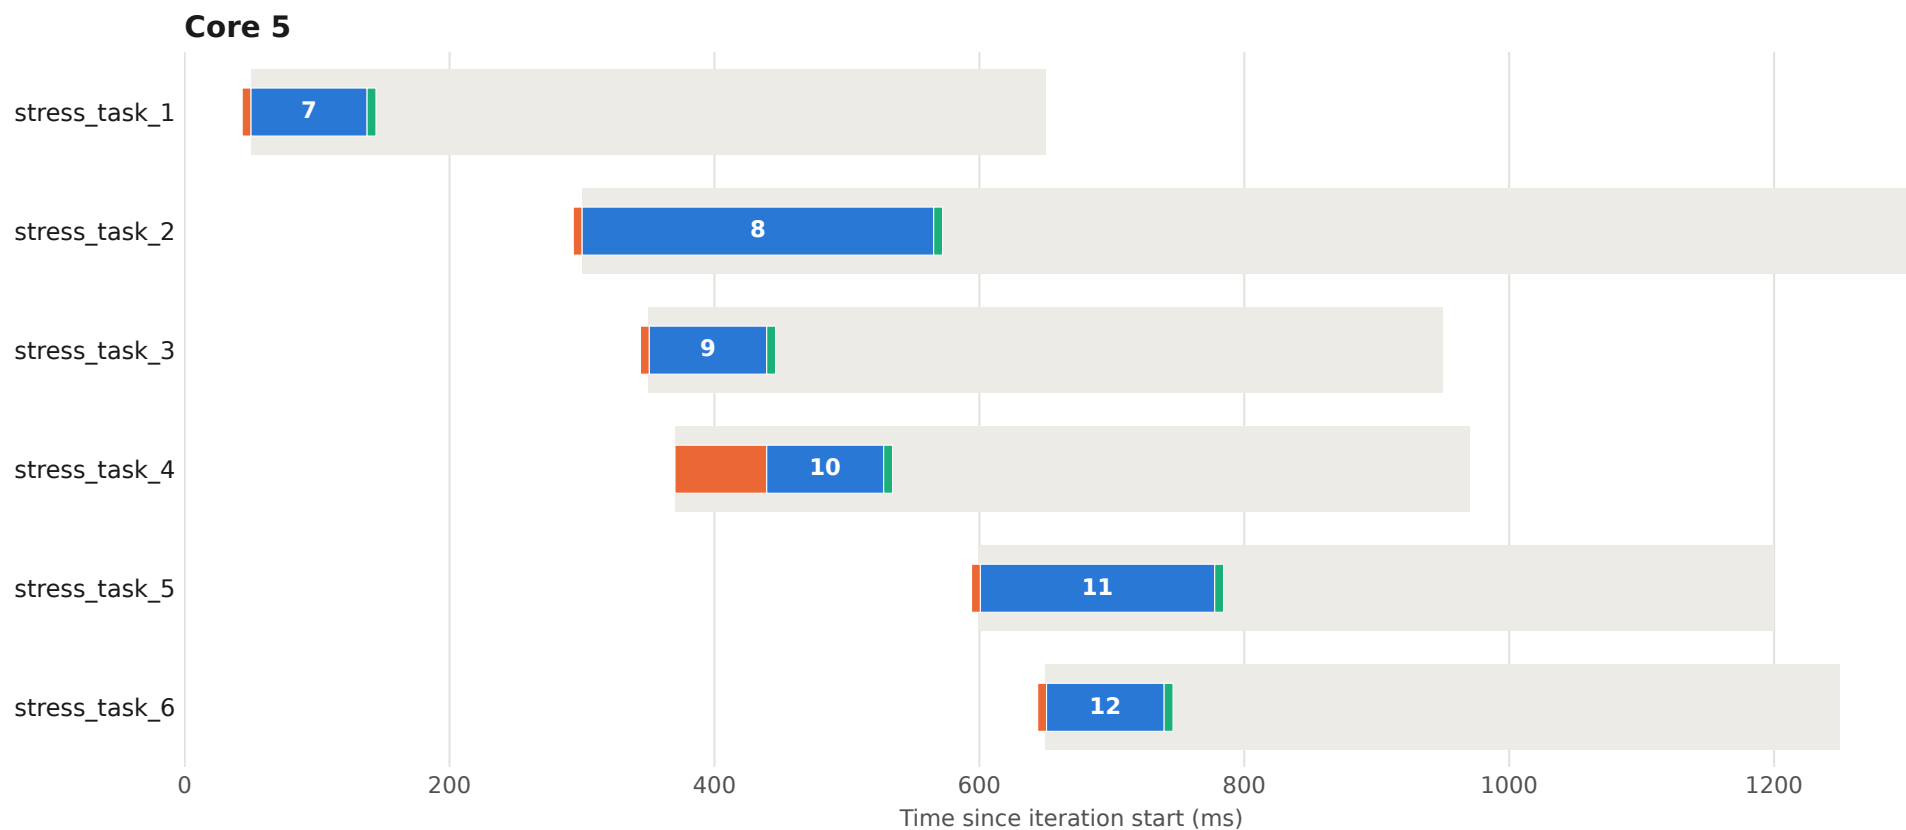


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 62 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

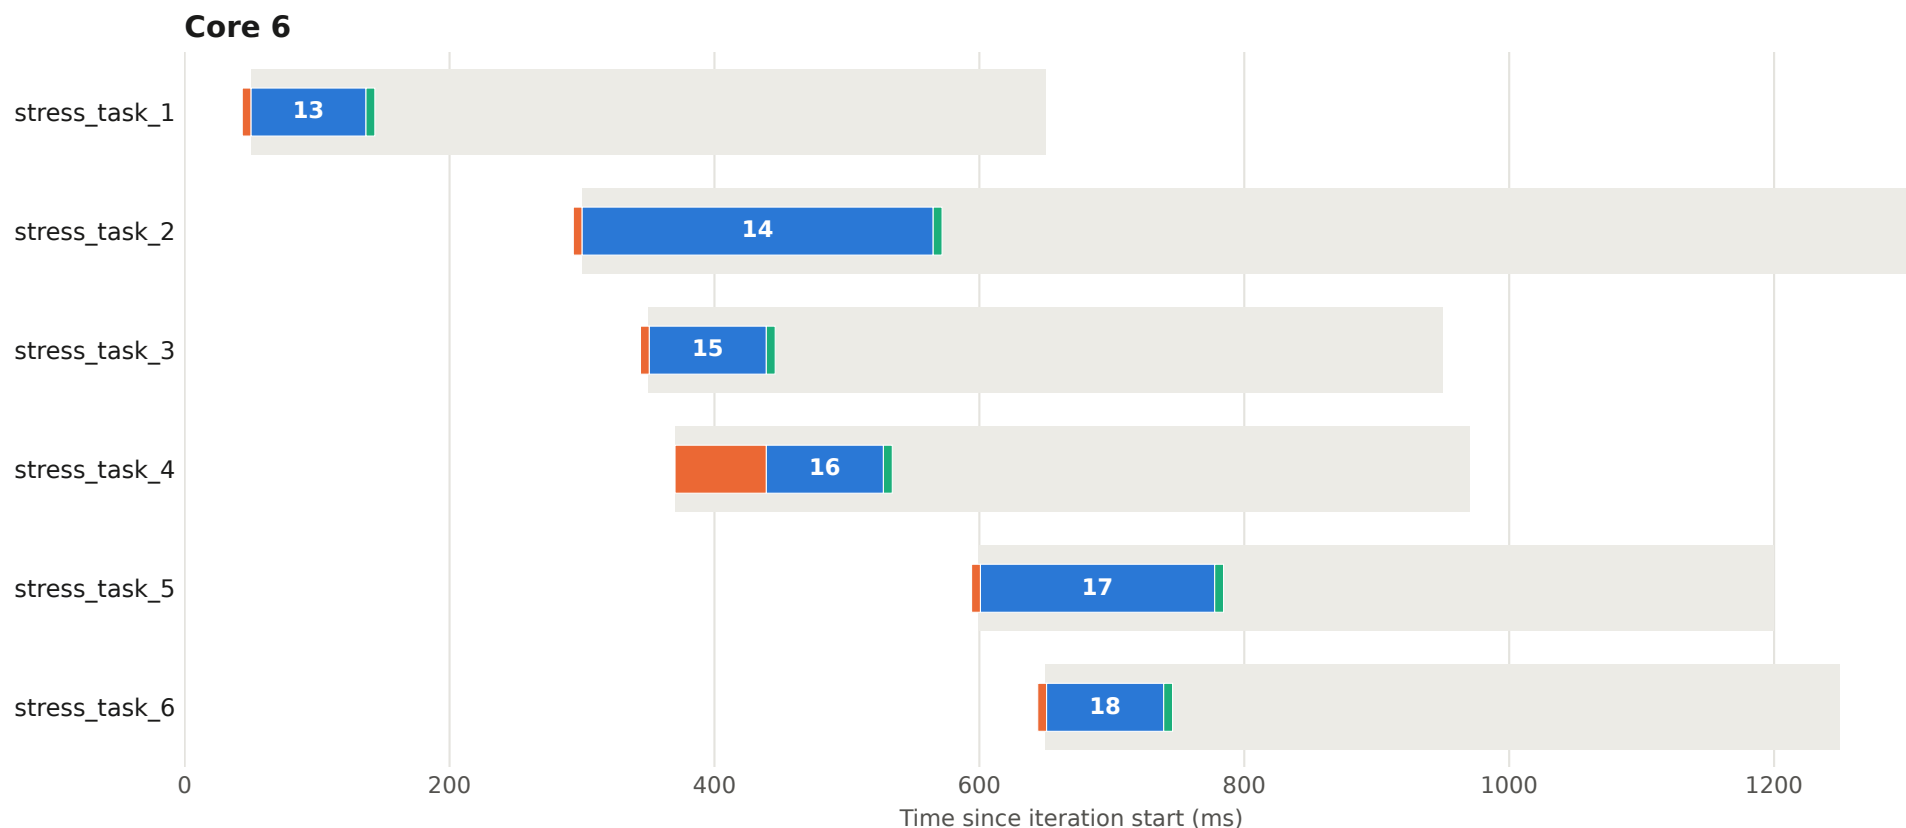


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 62 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

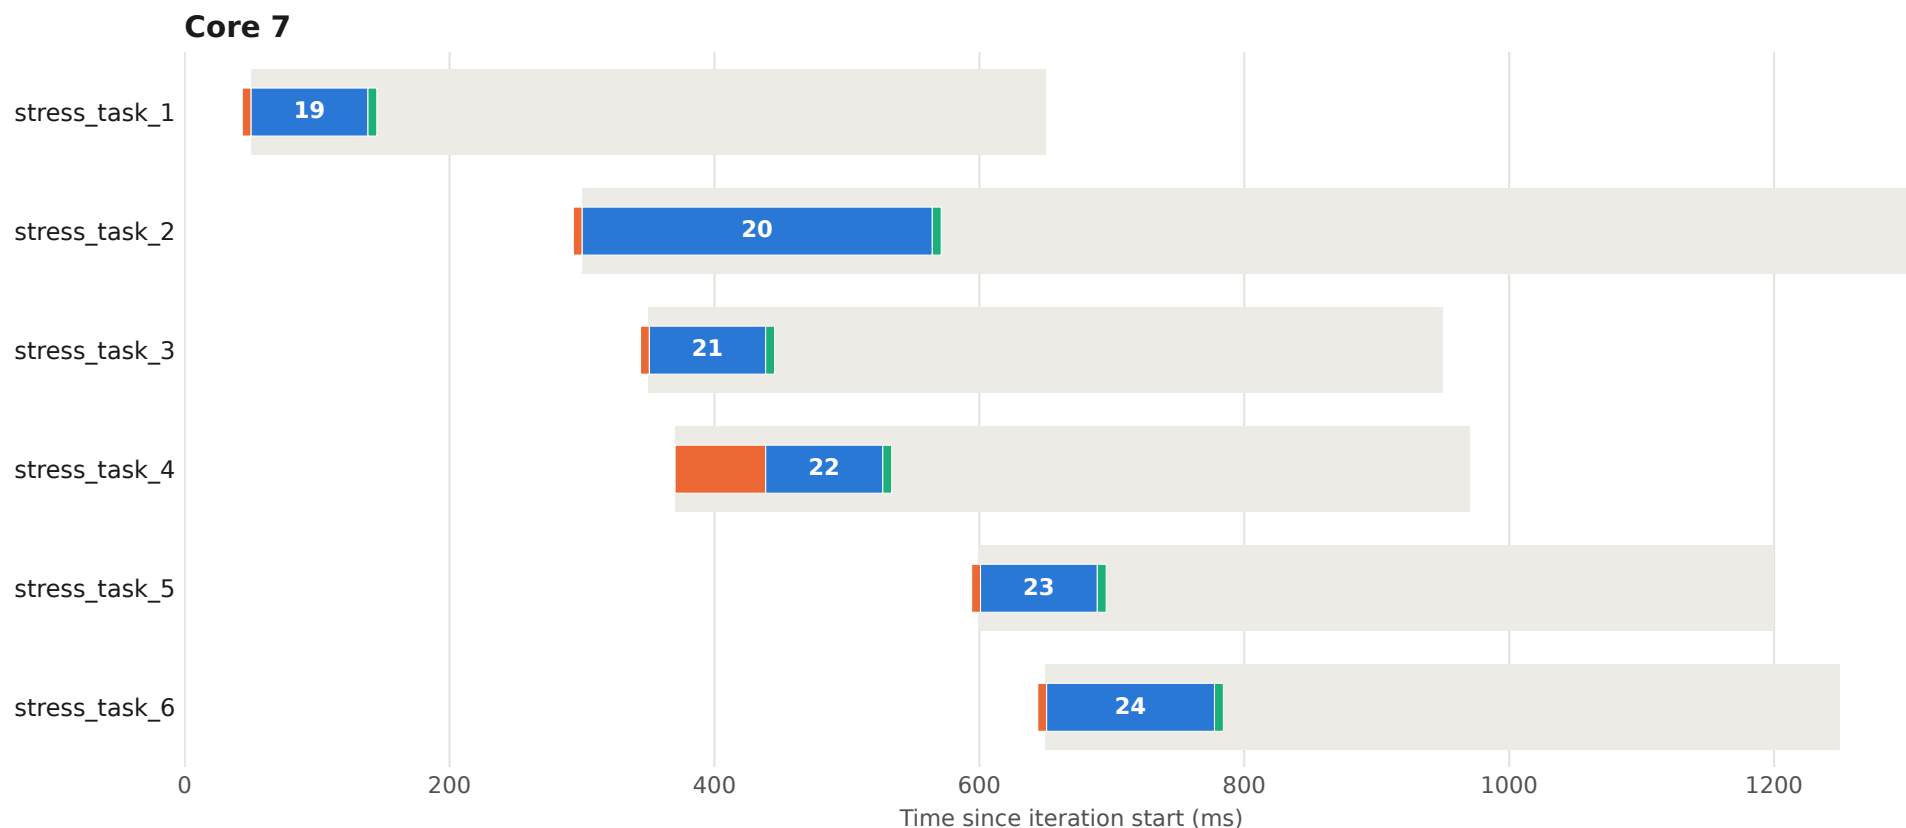


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 63 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

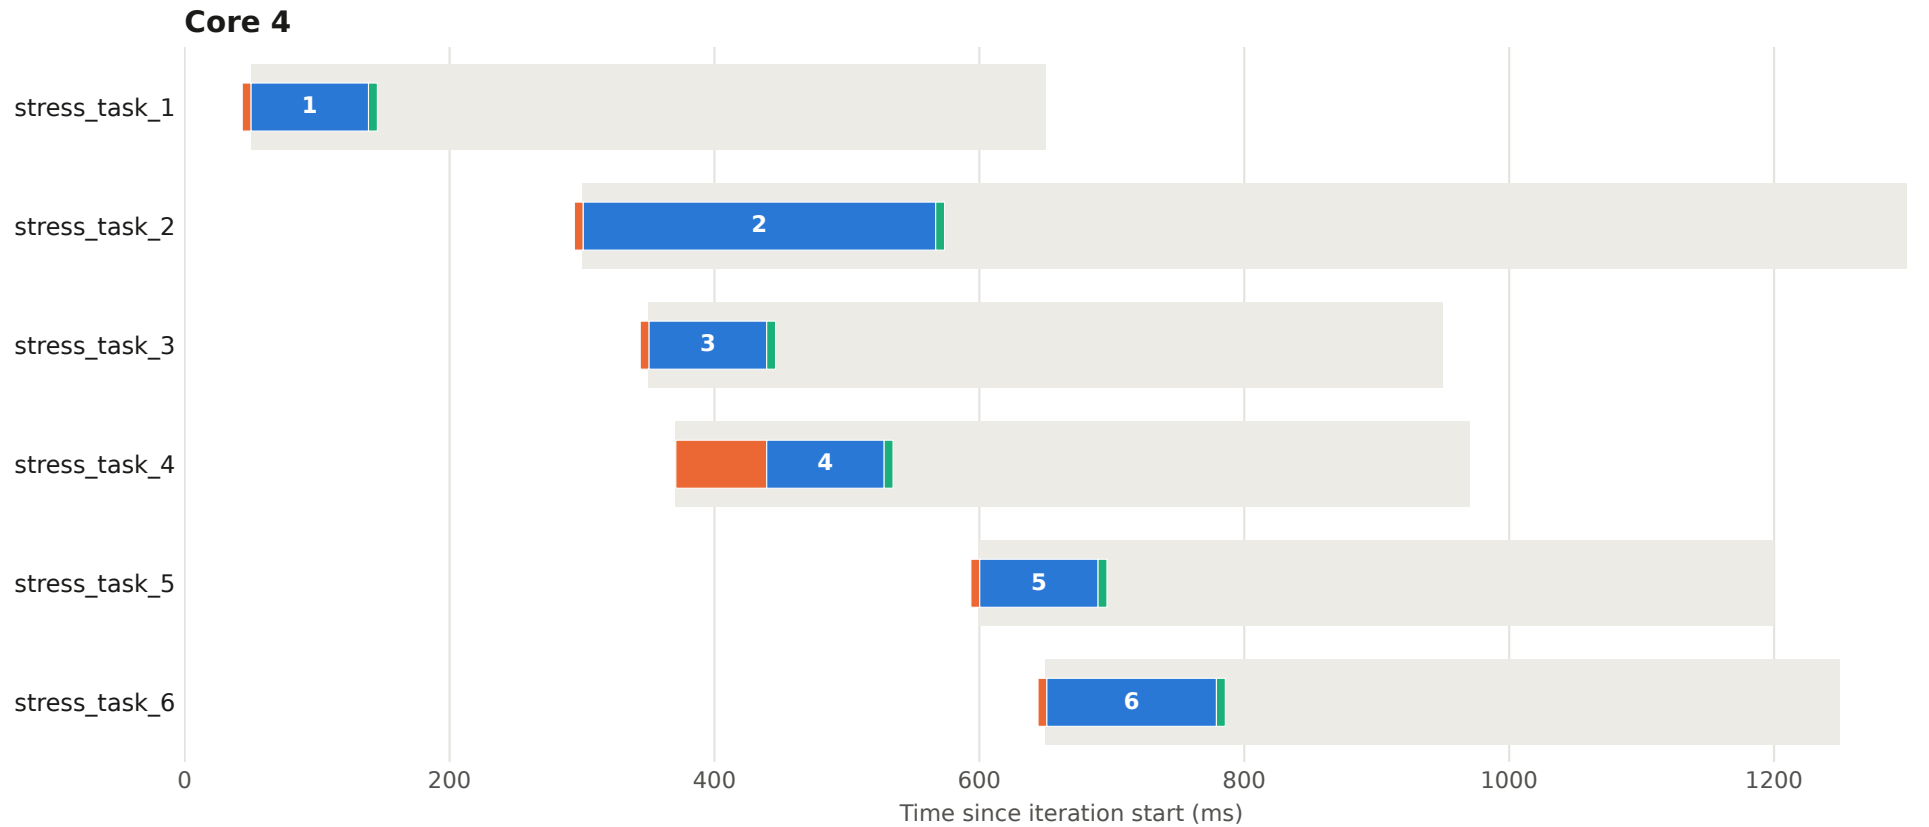


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 63 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

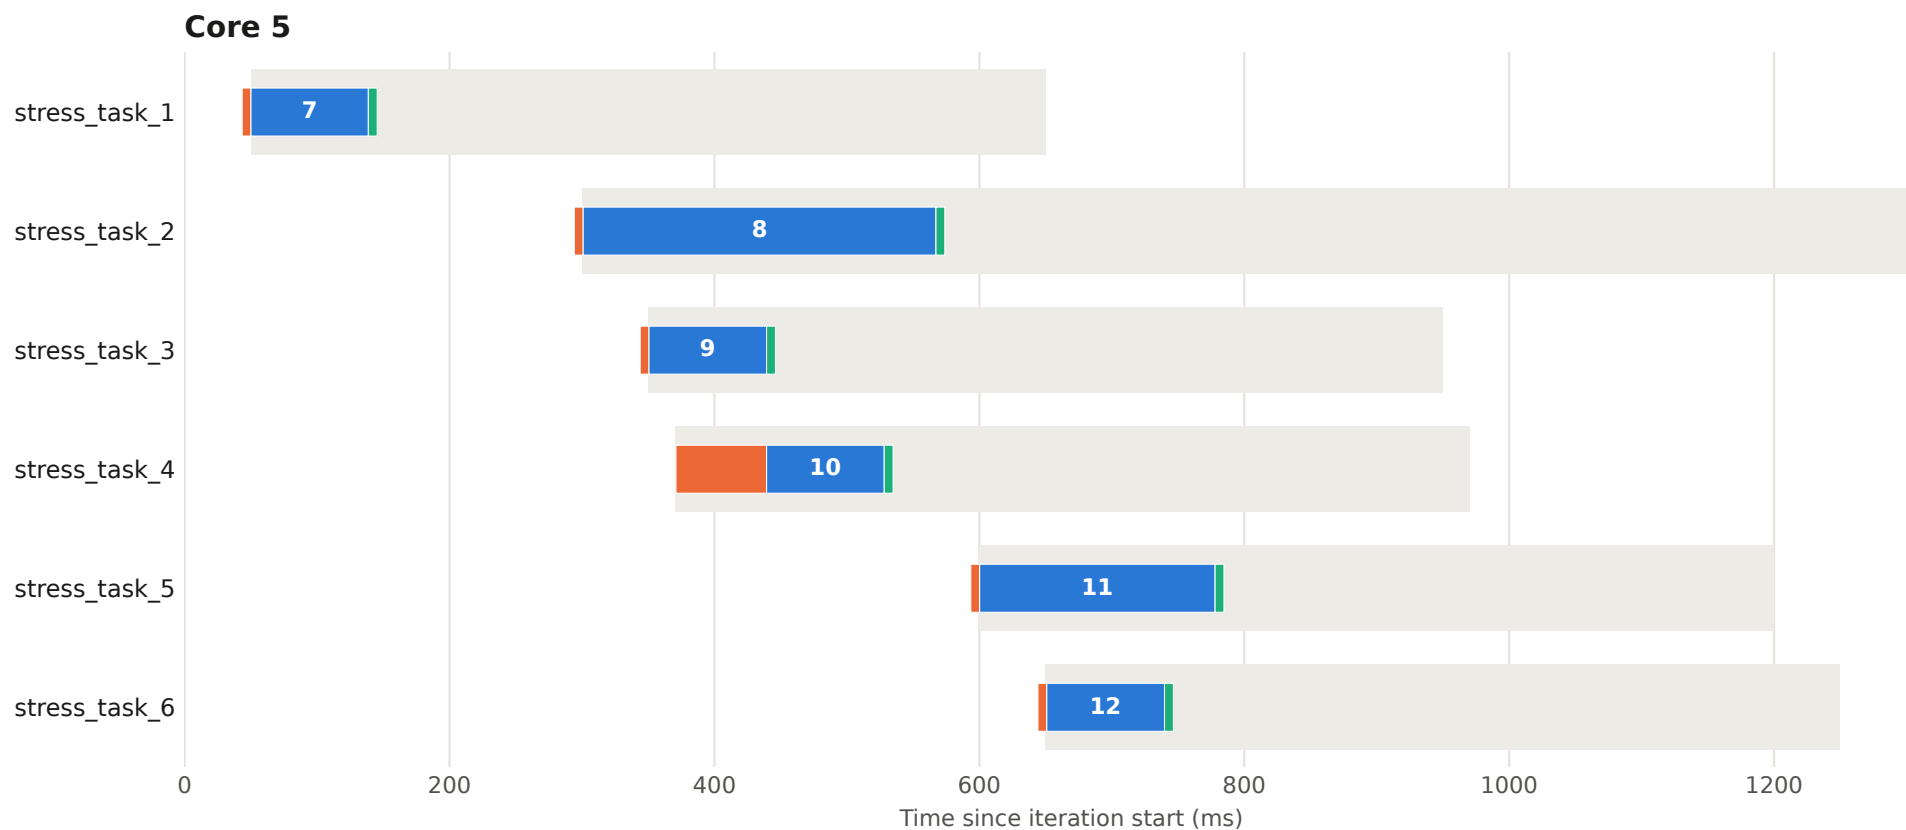


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 63 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

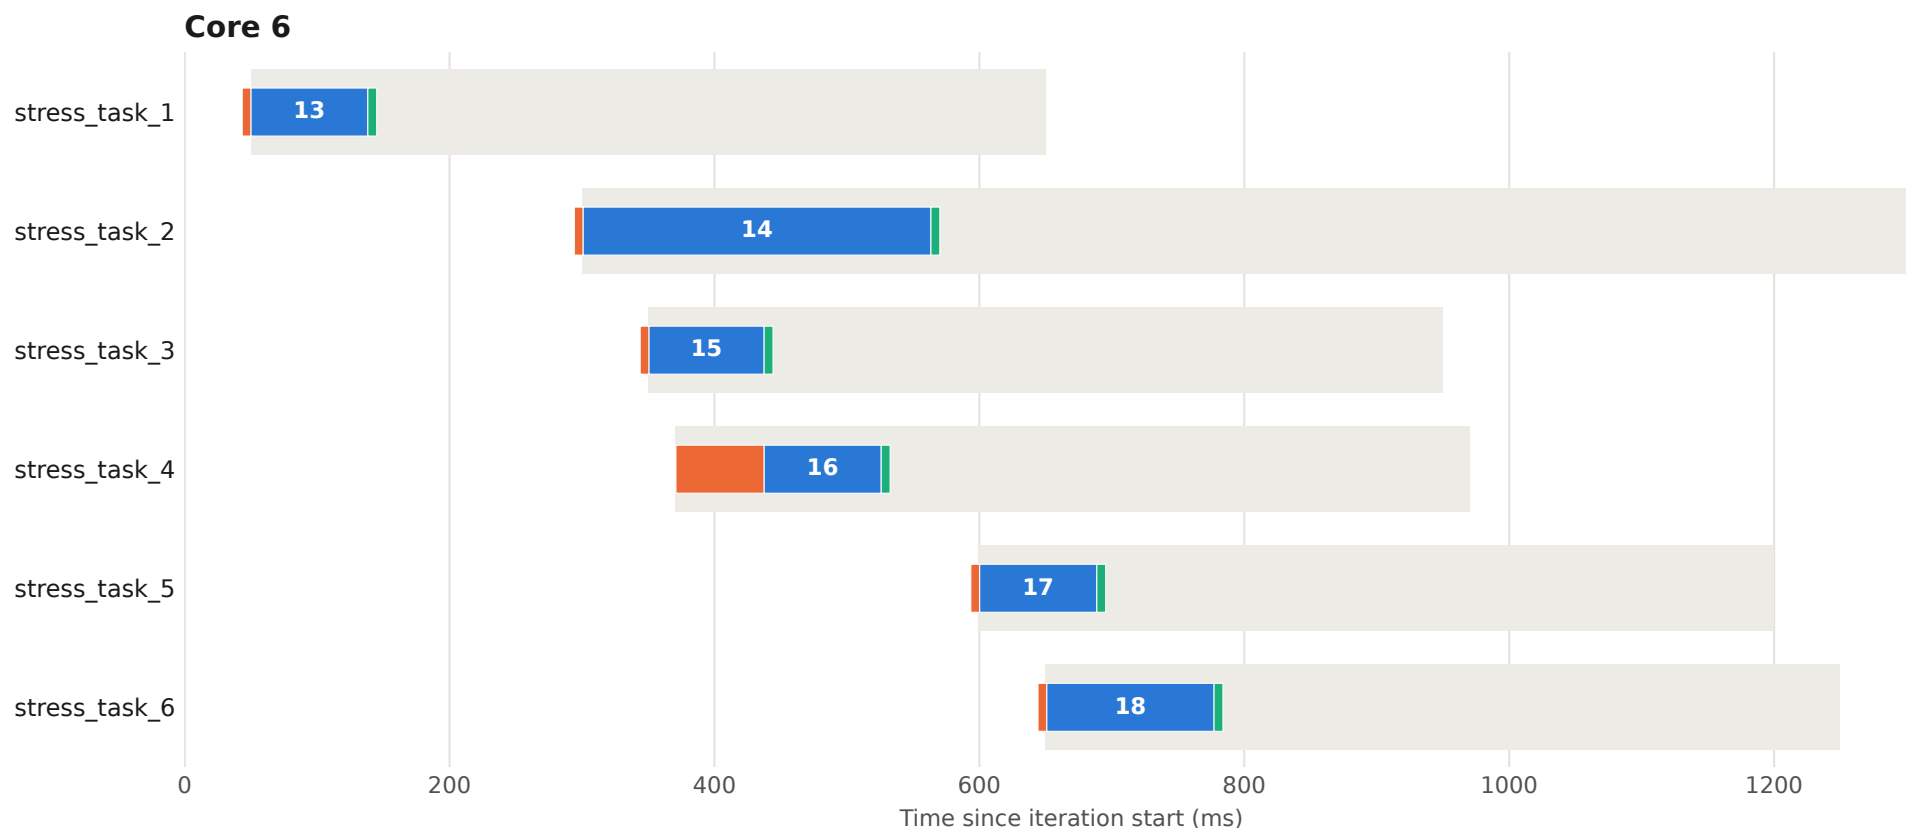


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 63 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

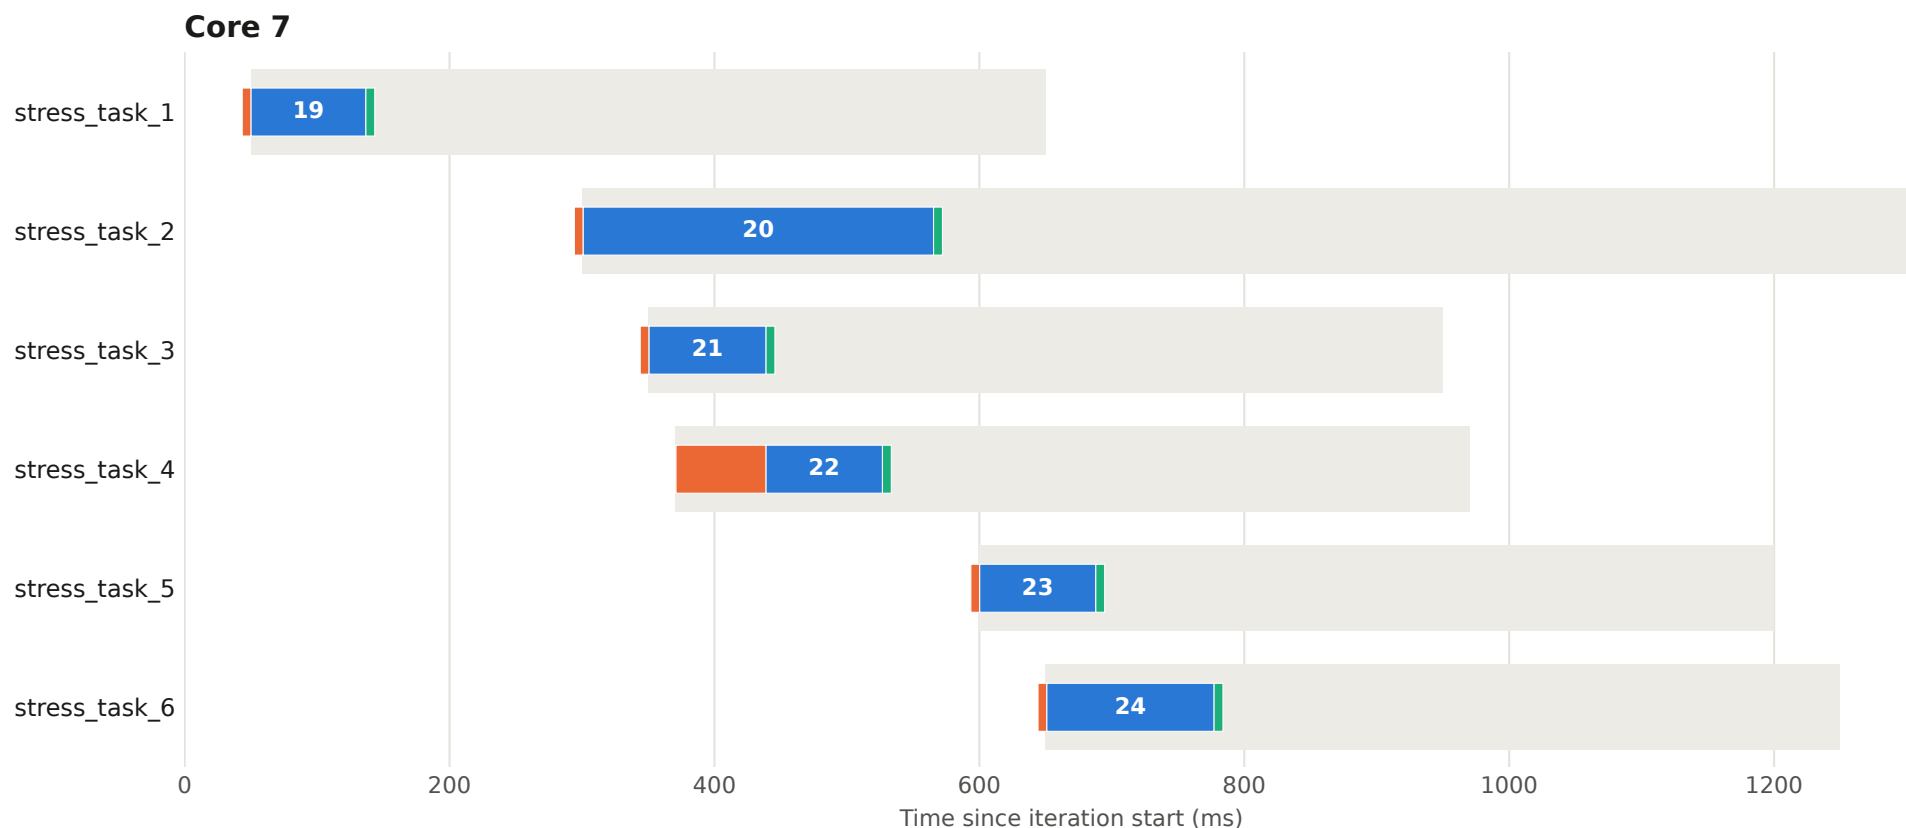


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 64 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

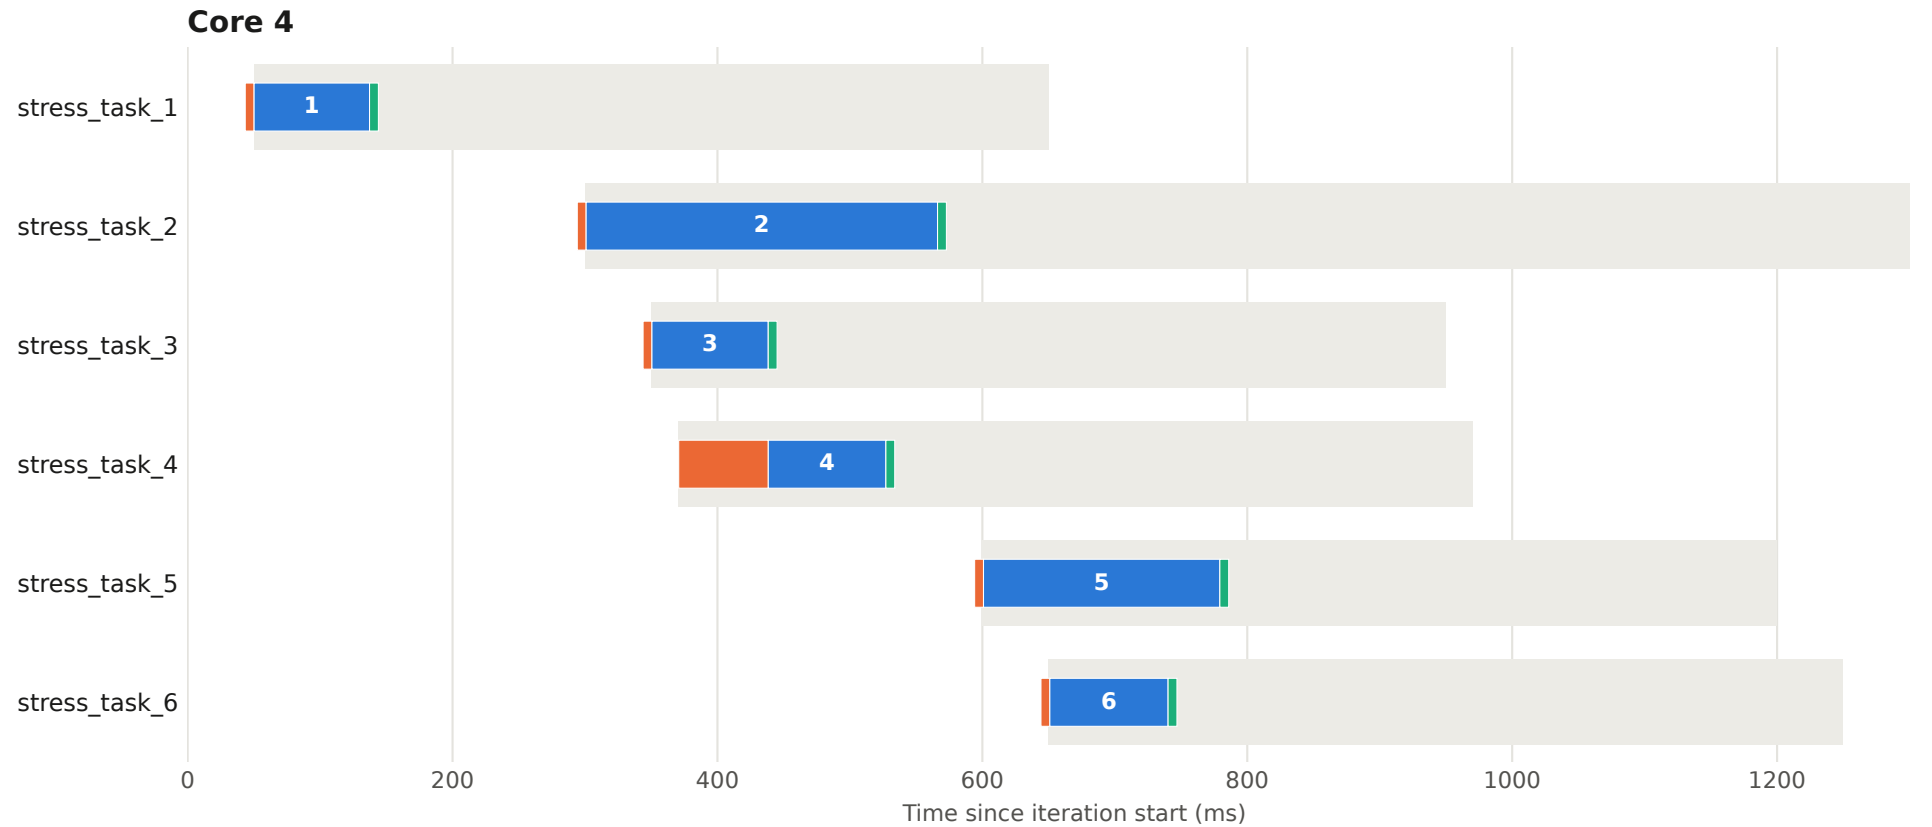


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 64 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

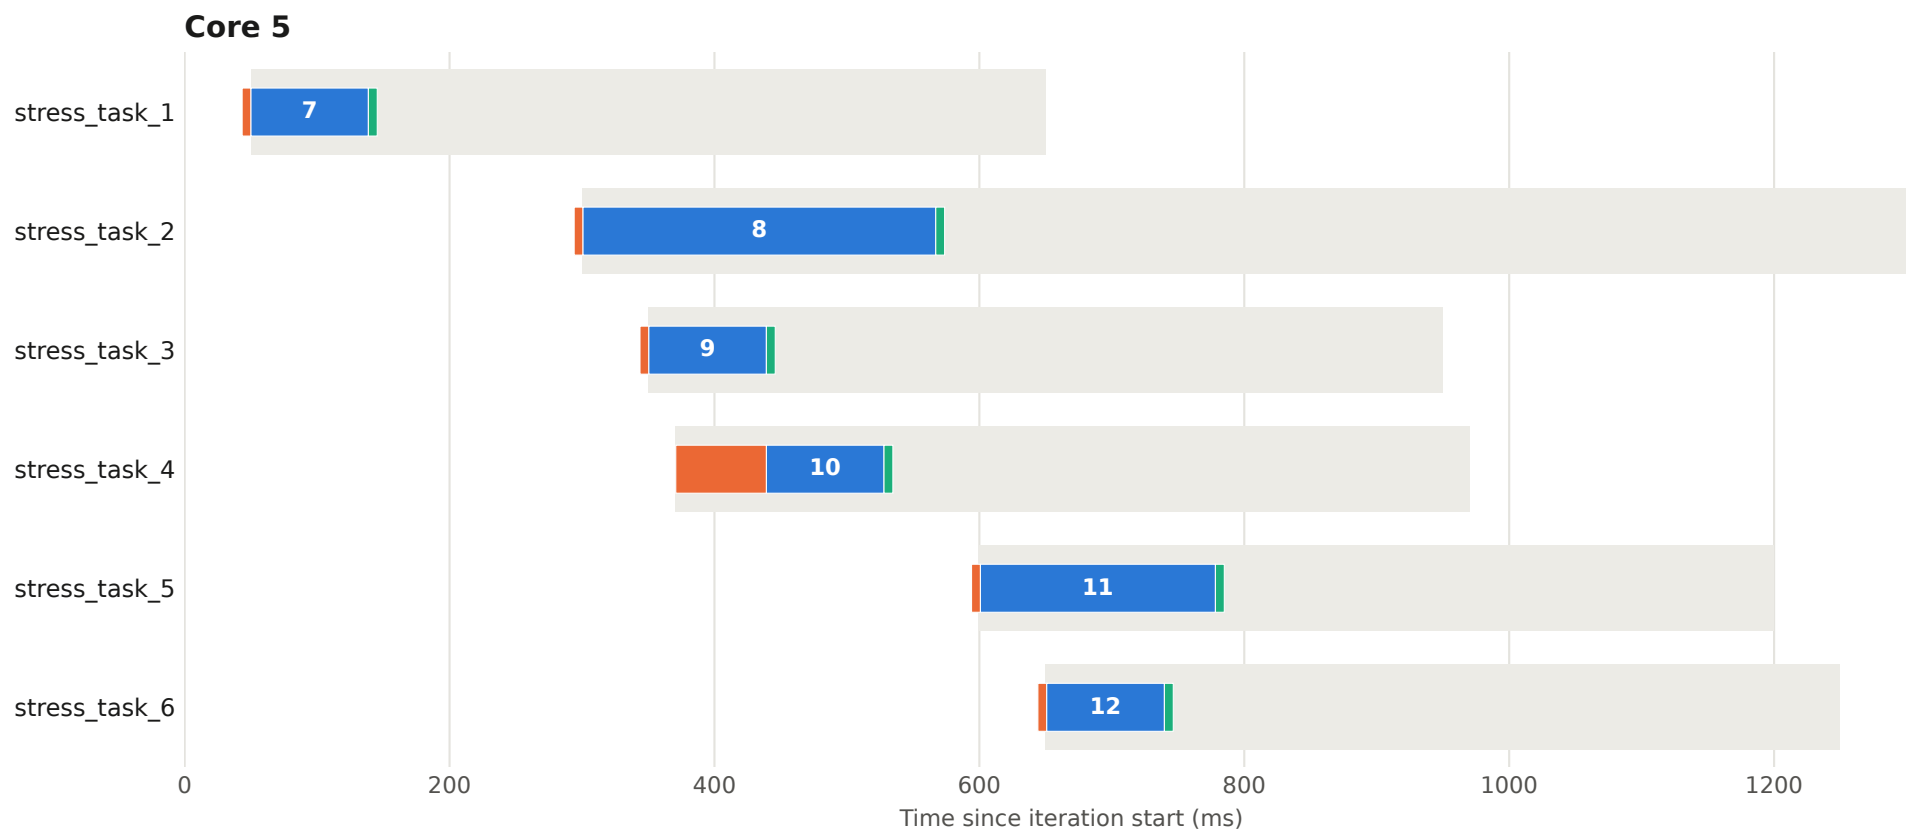


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 64 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

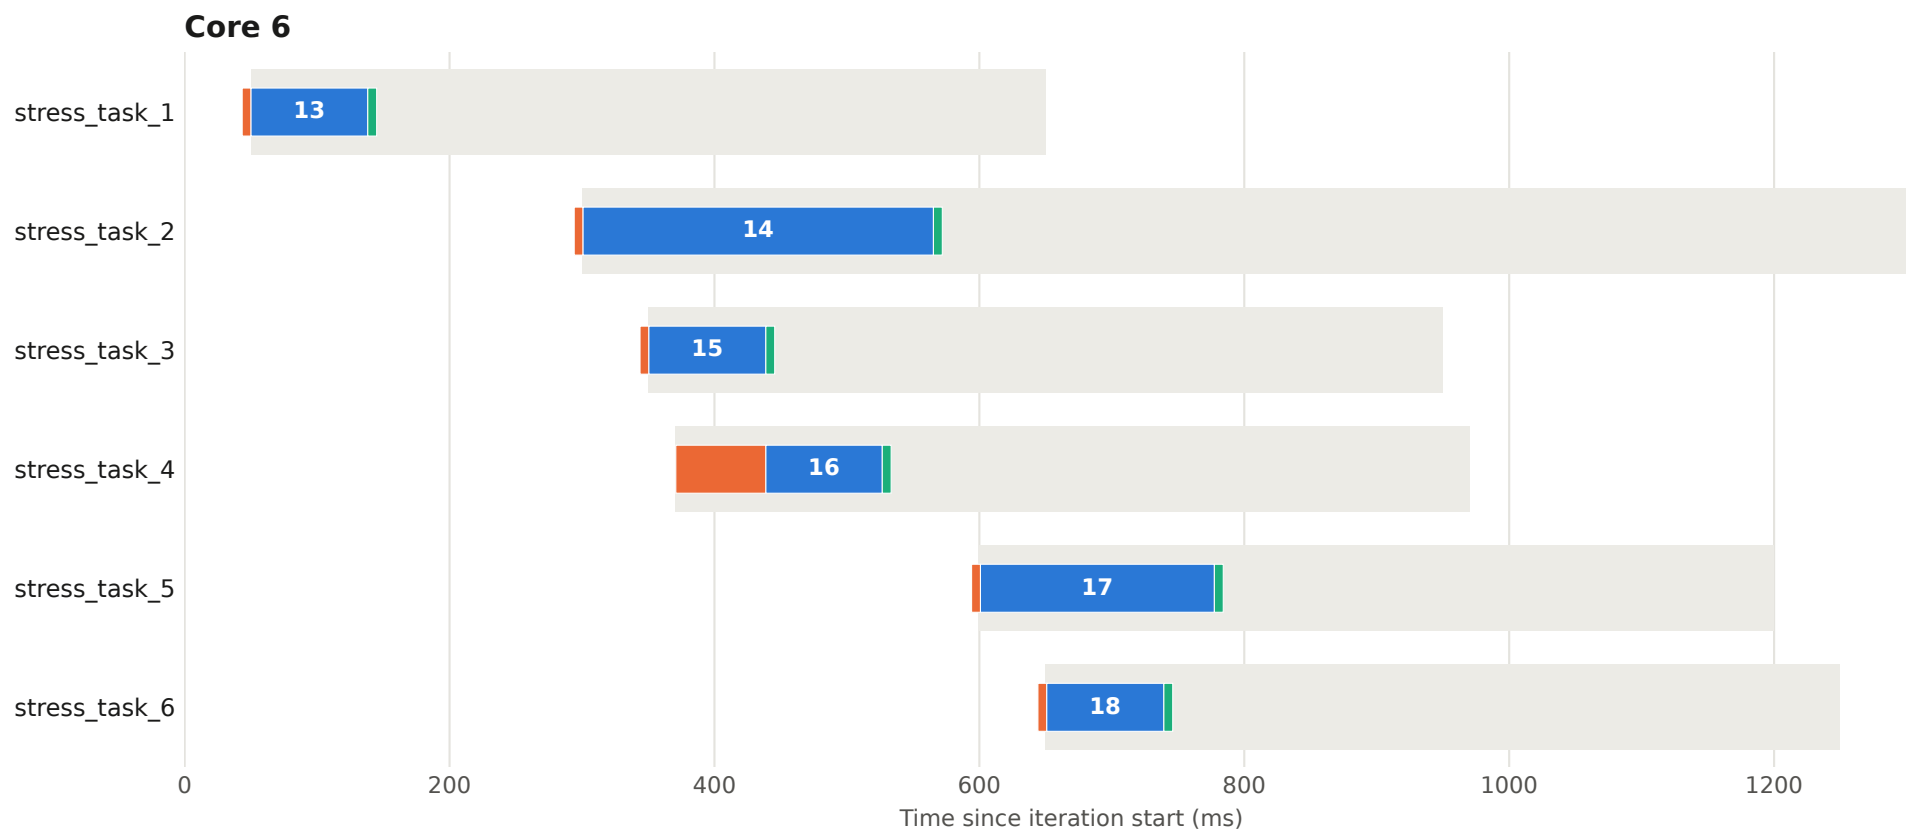


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 64 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

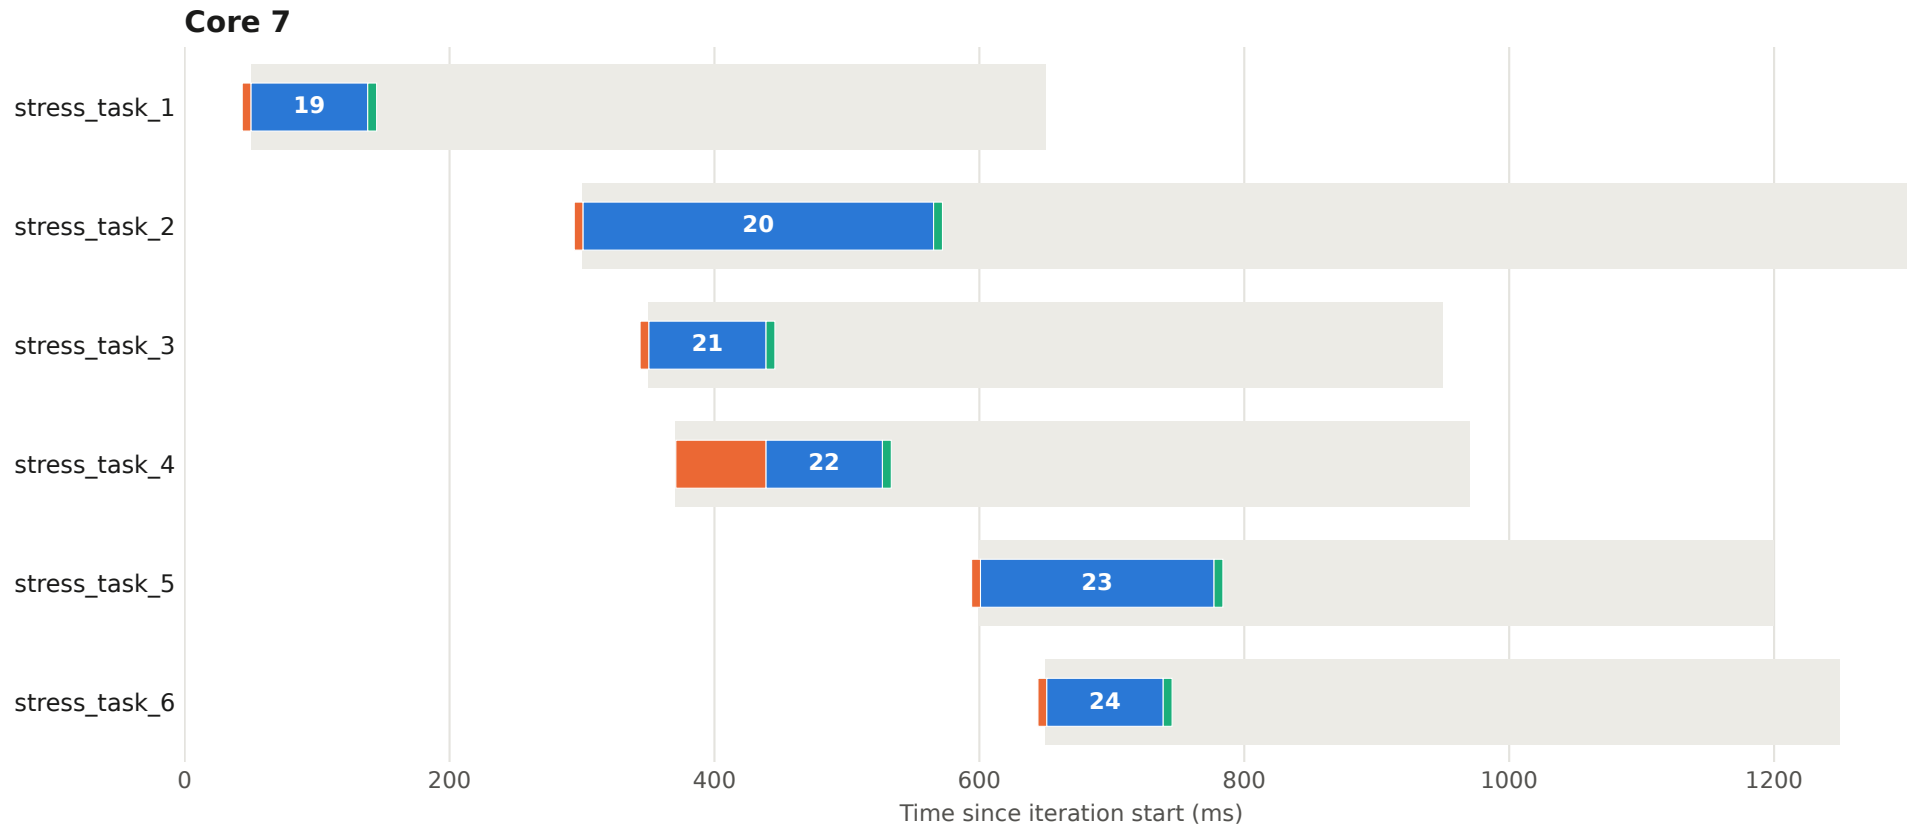


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 65 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

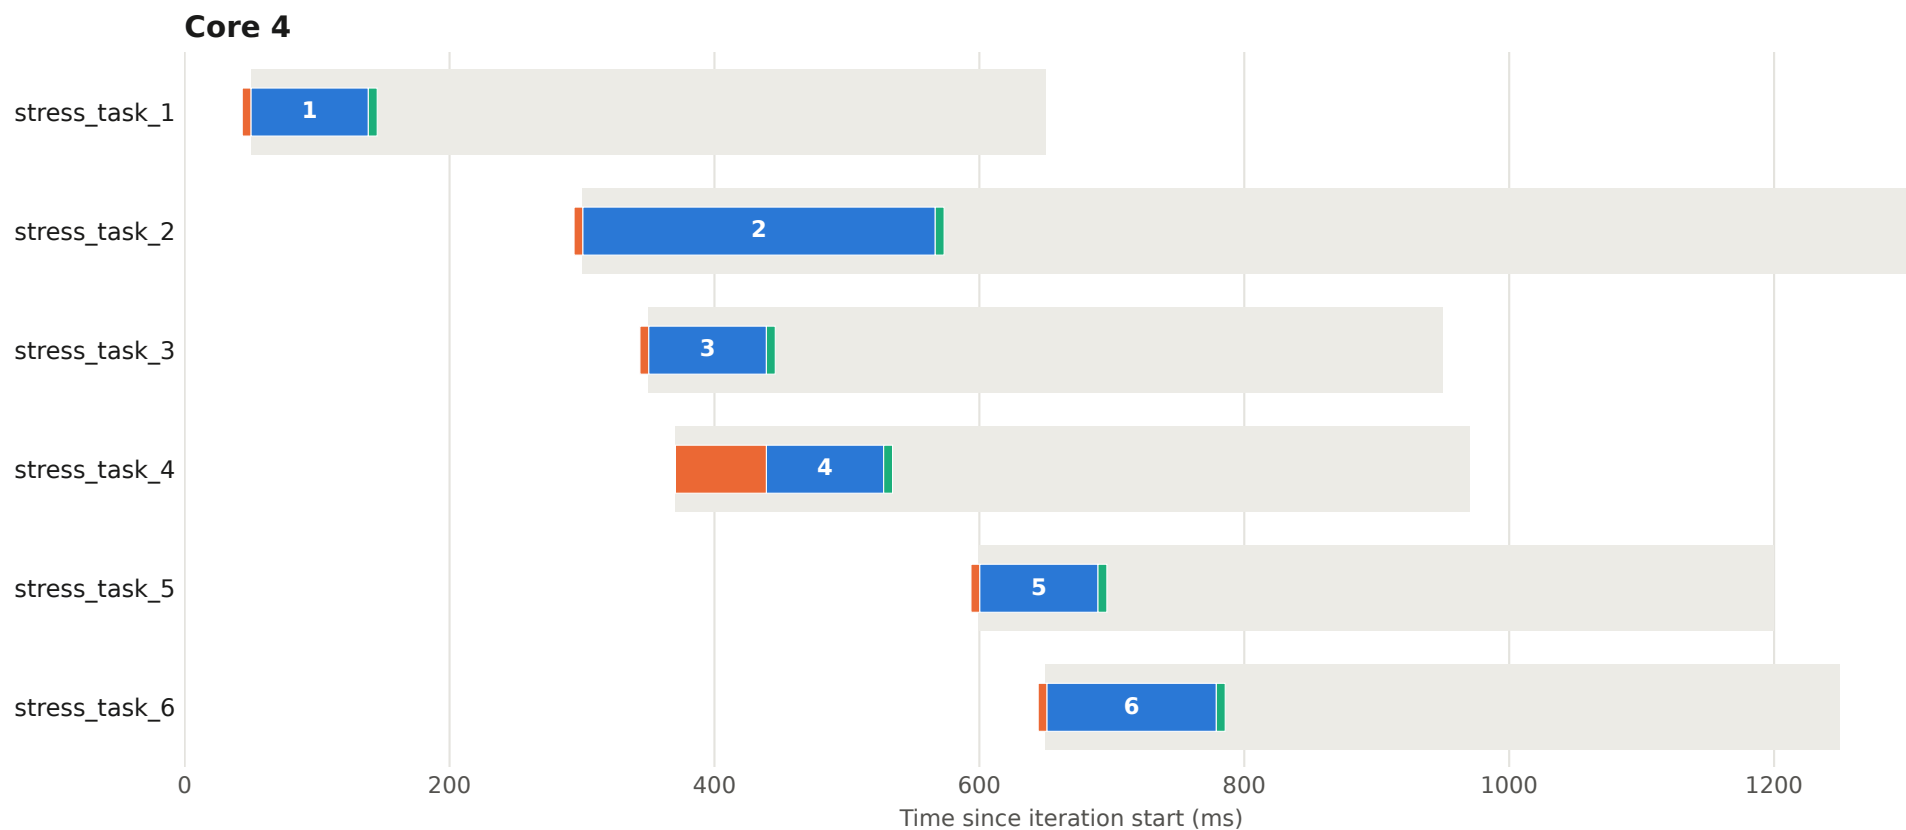


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 65 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

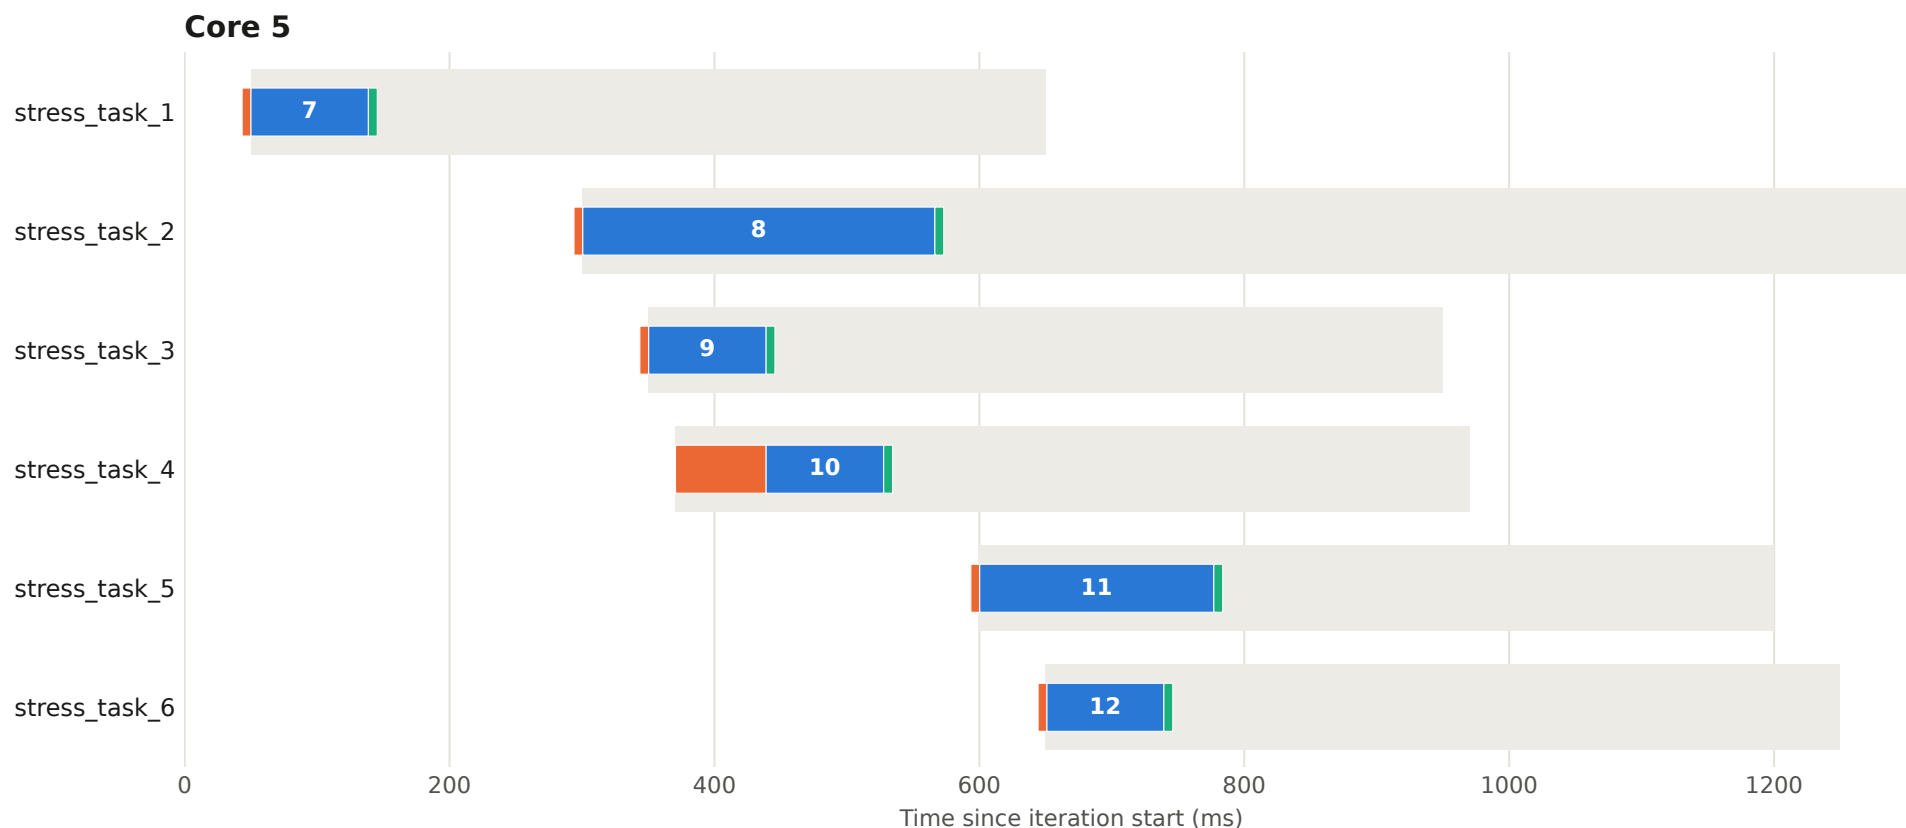


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 65 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

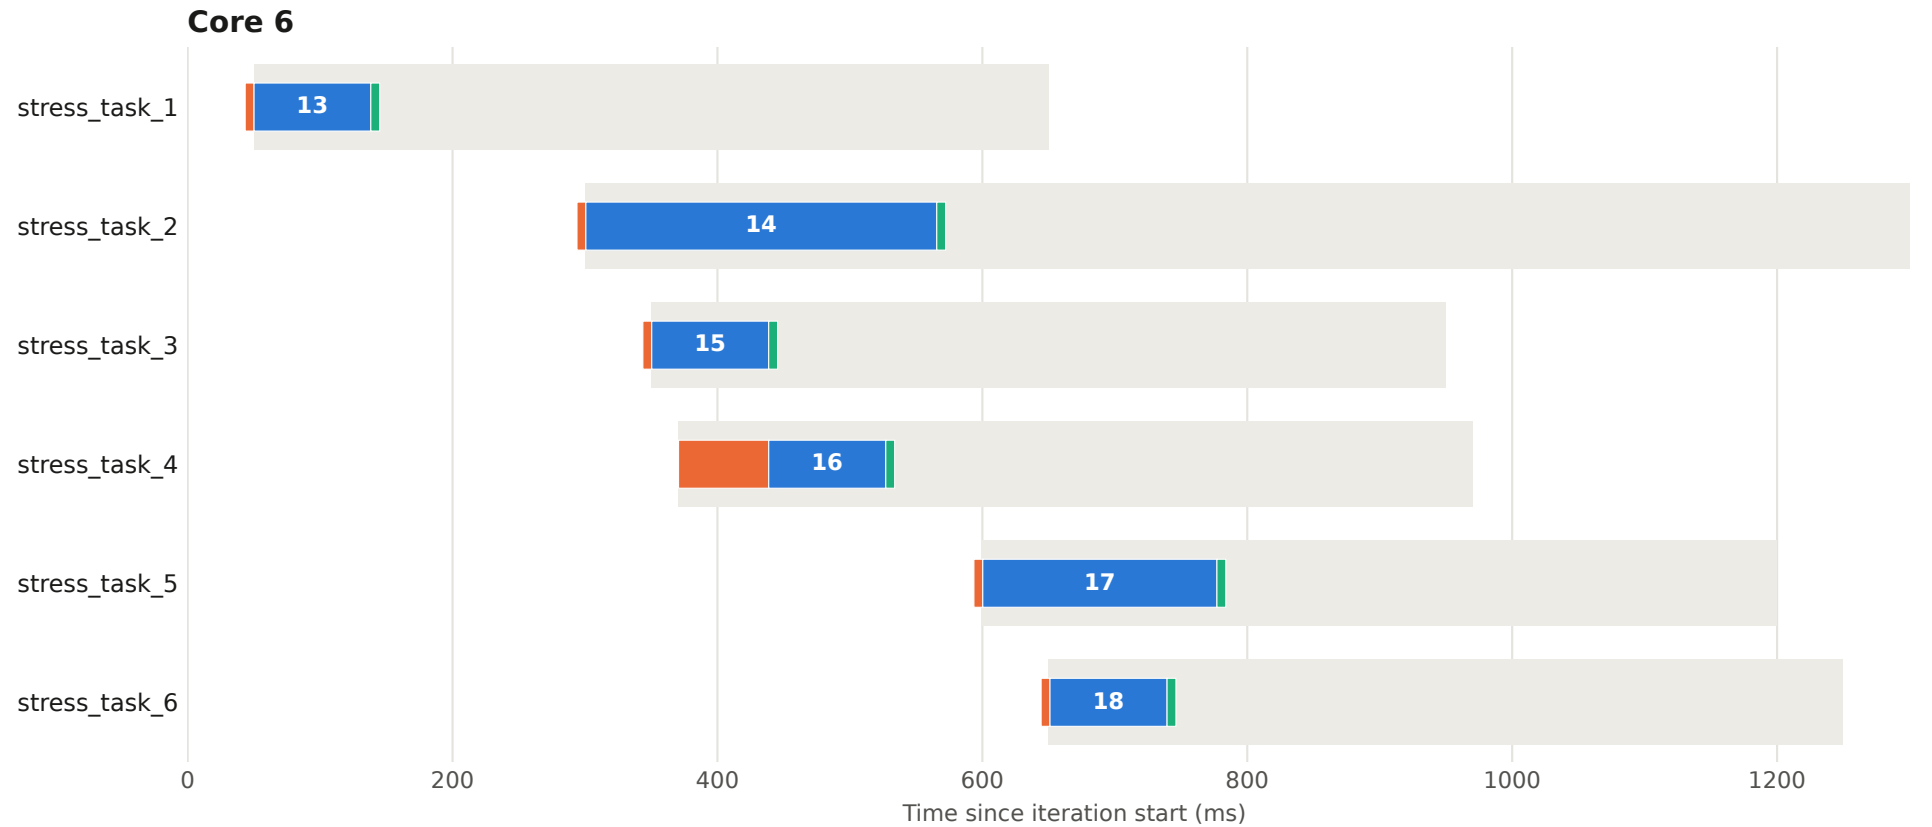


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 65 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

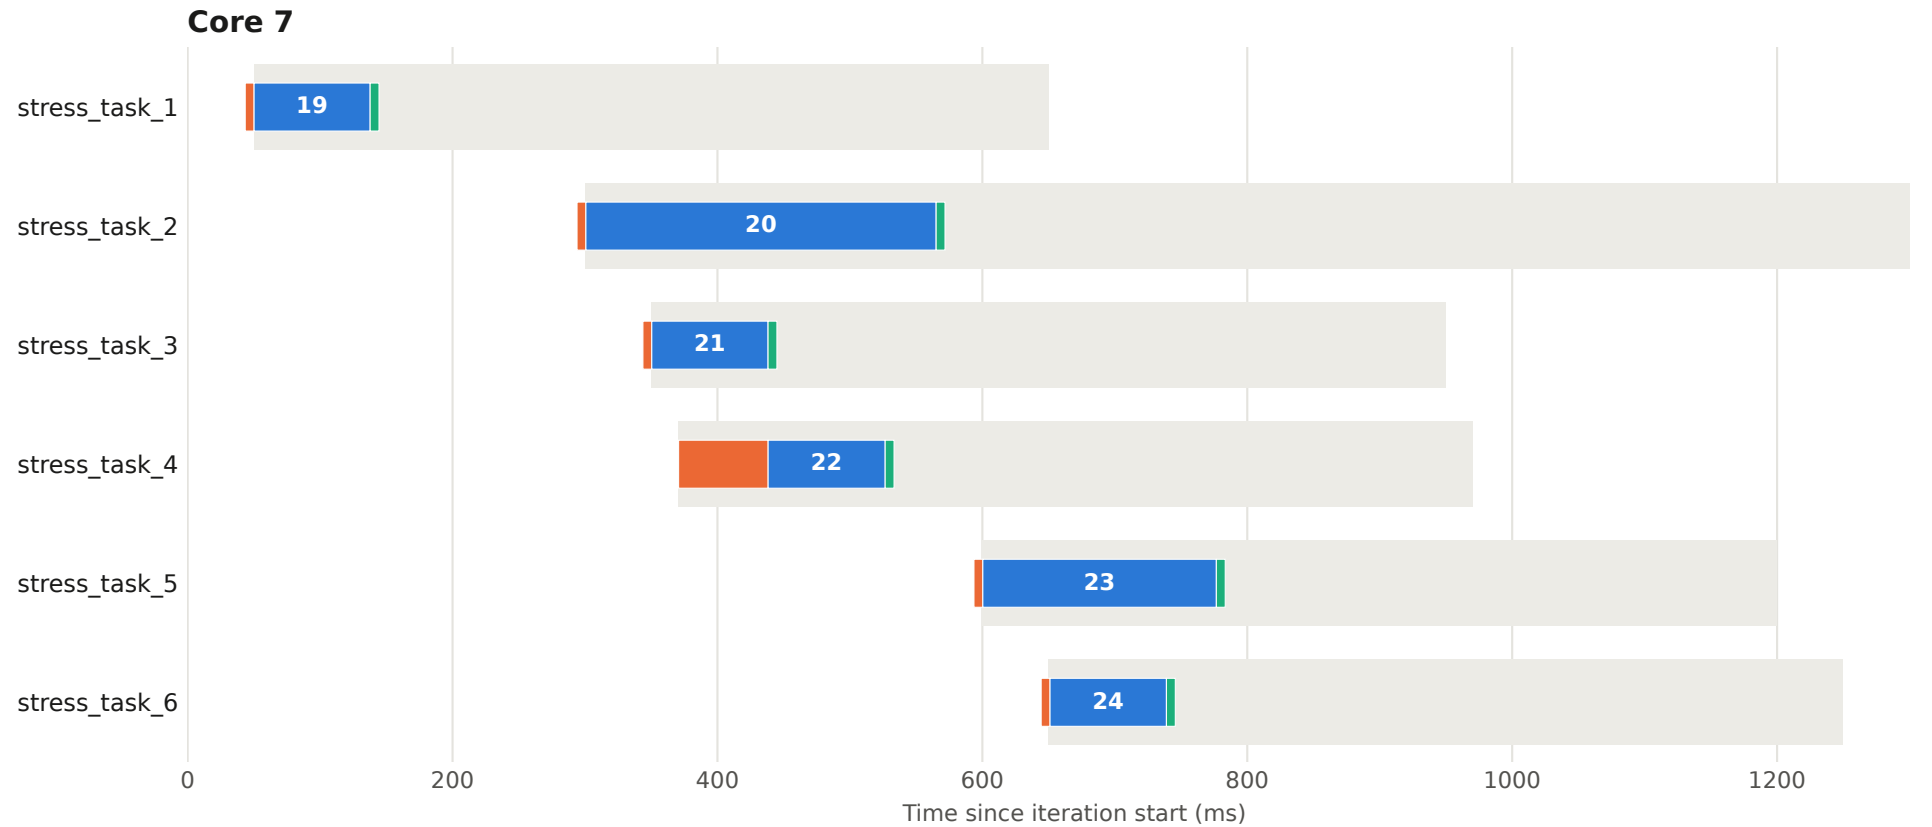


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 66 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

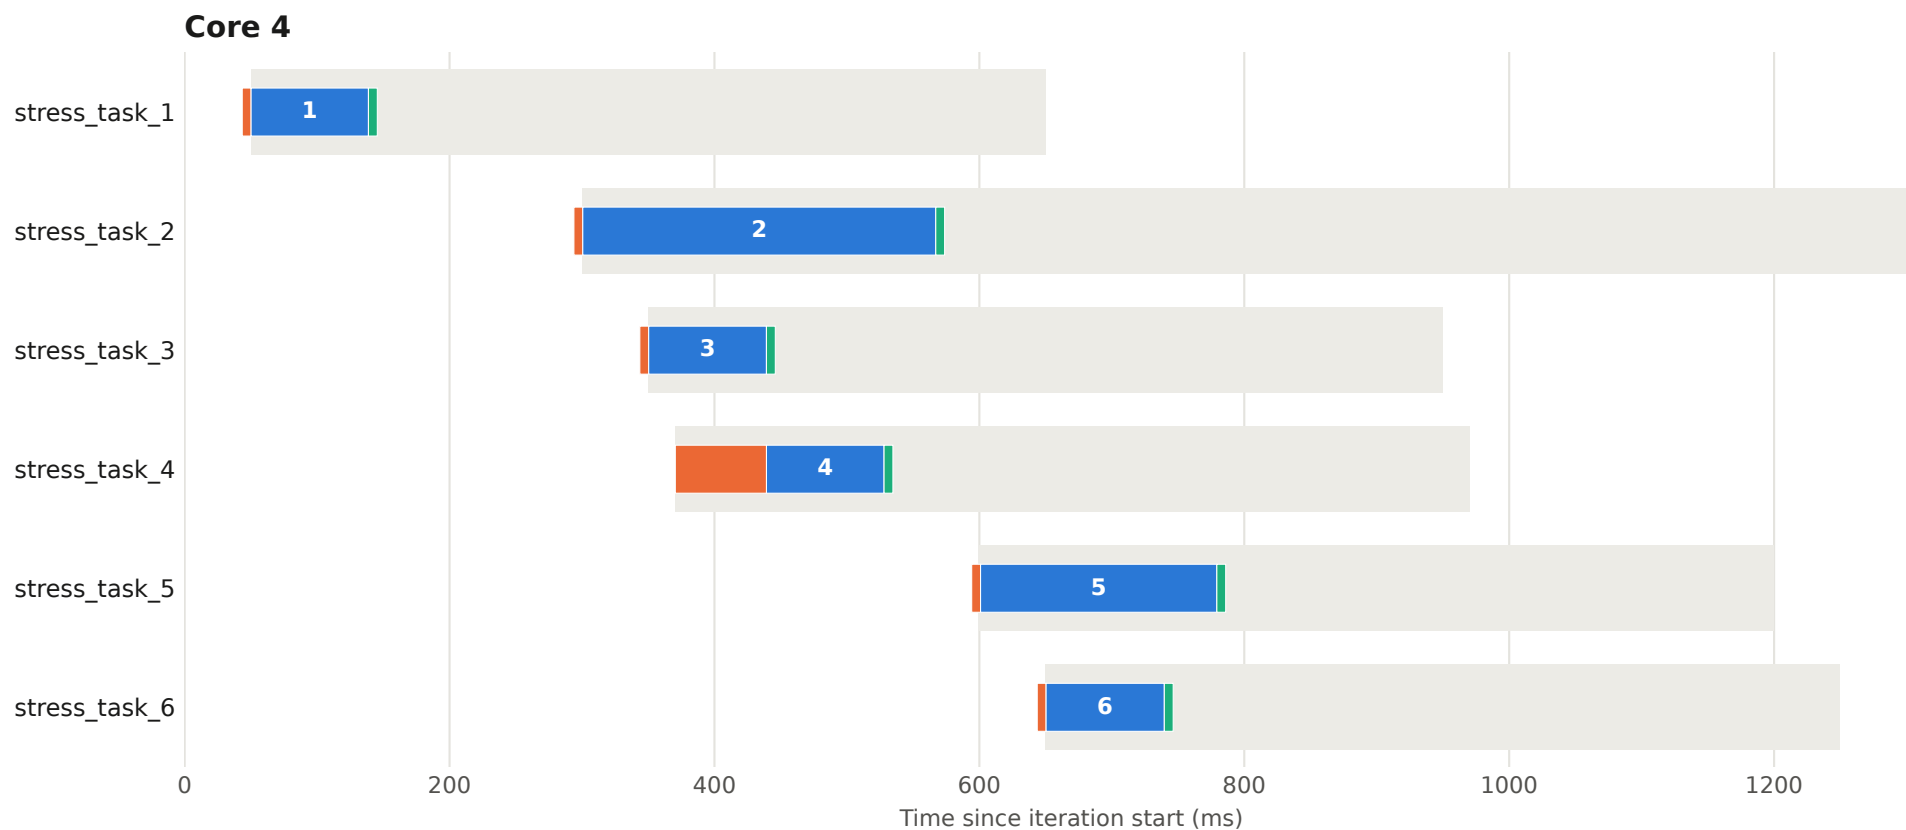


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 66 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

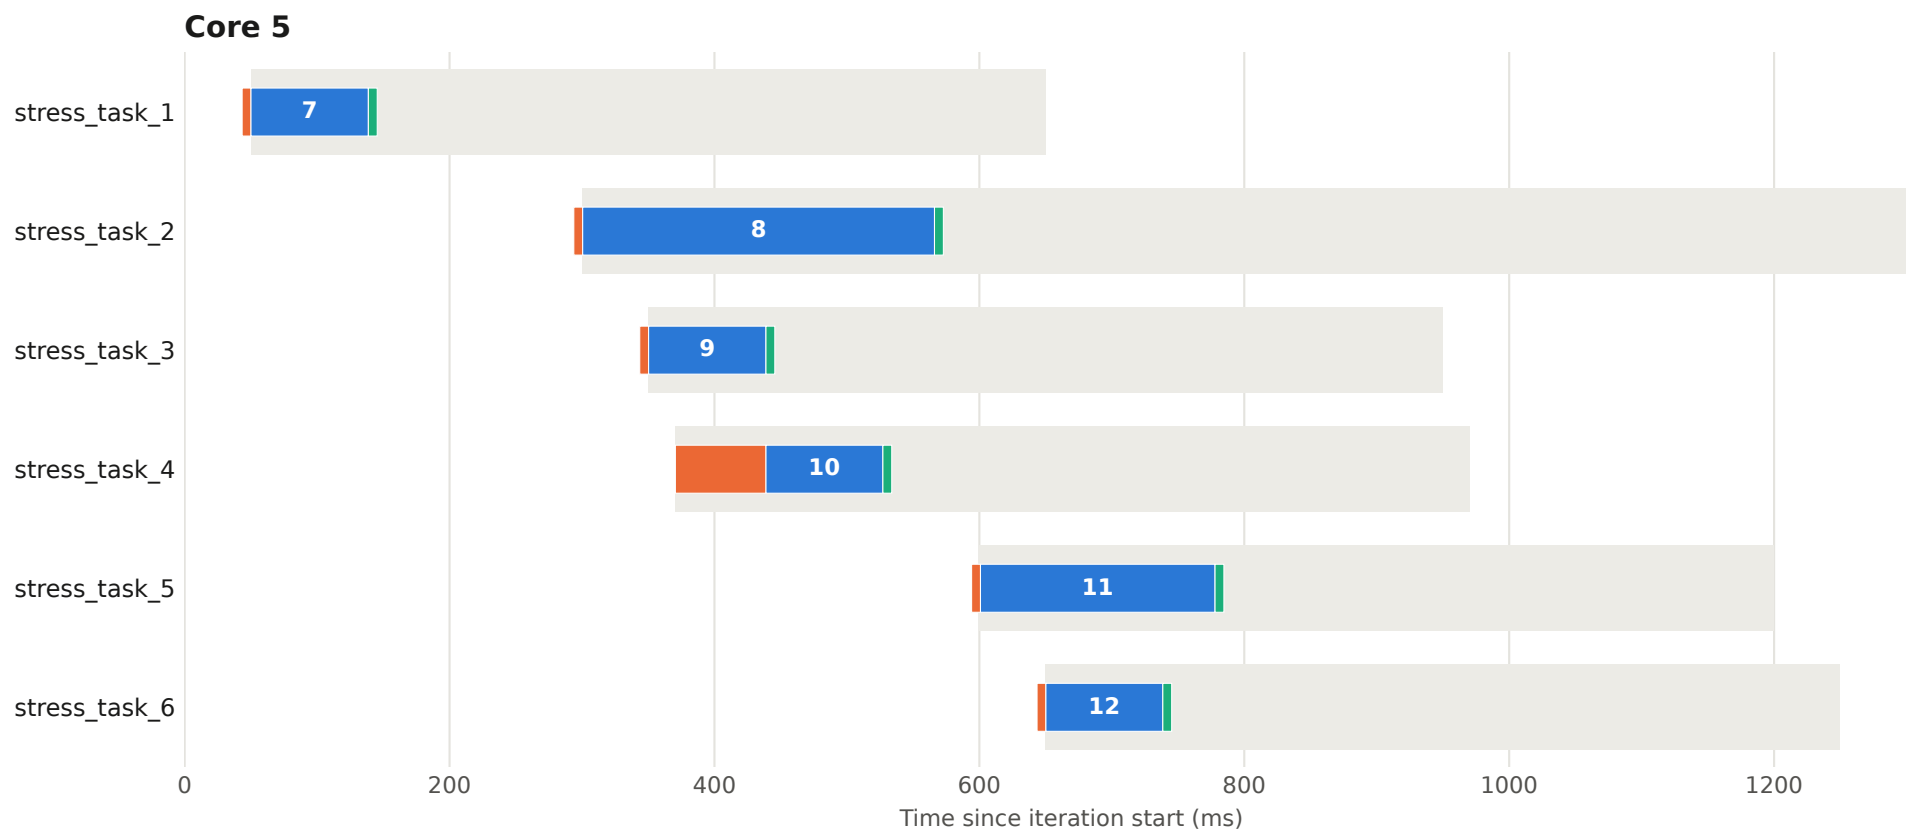


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 66 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

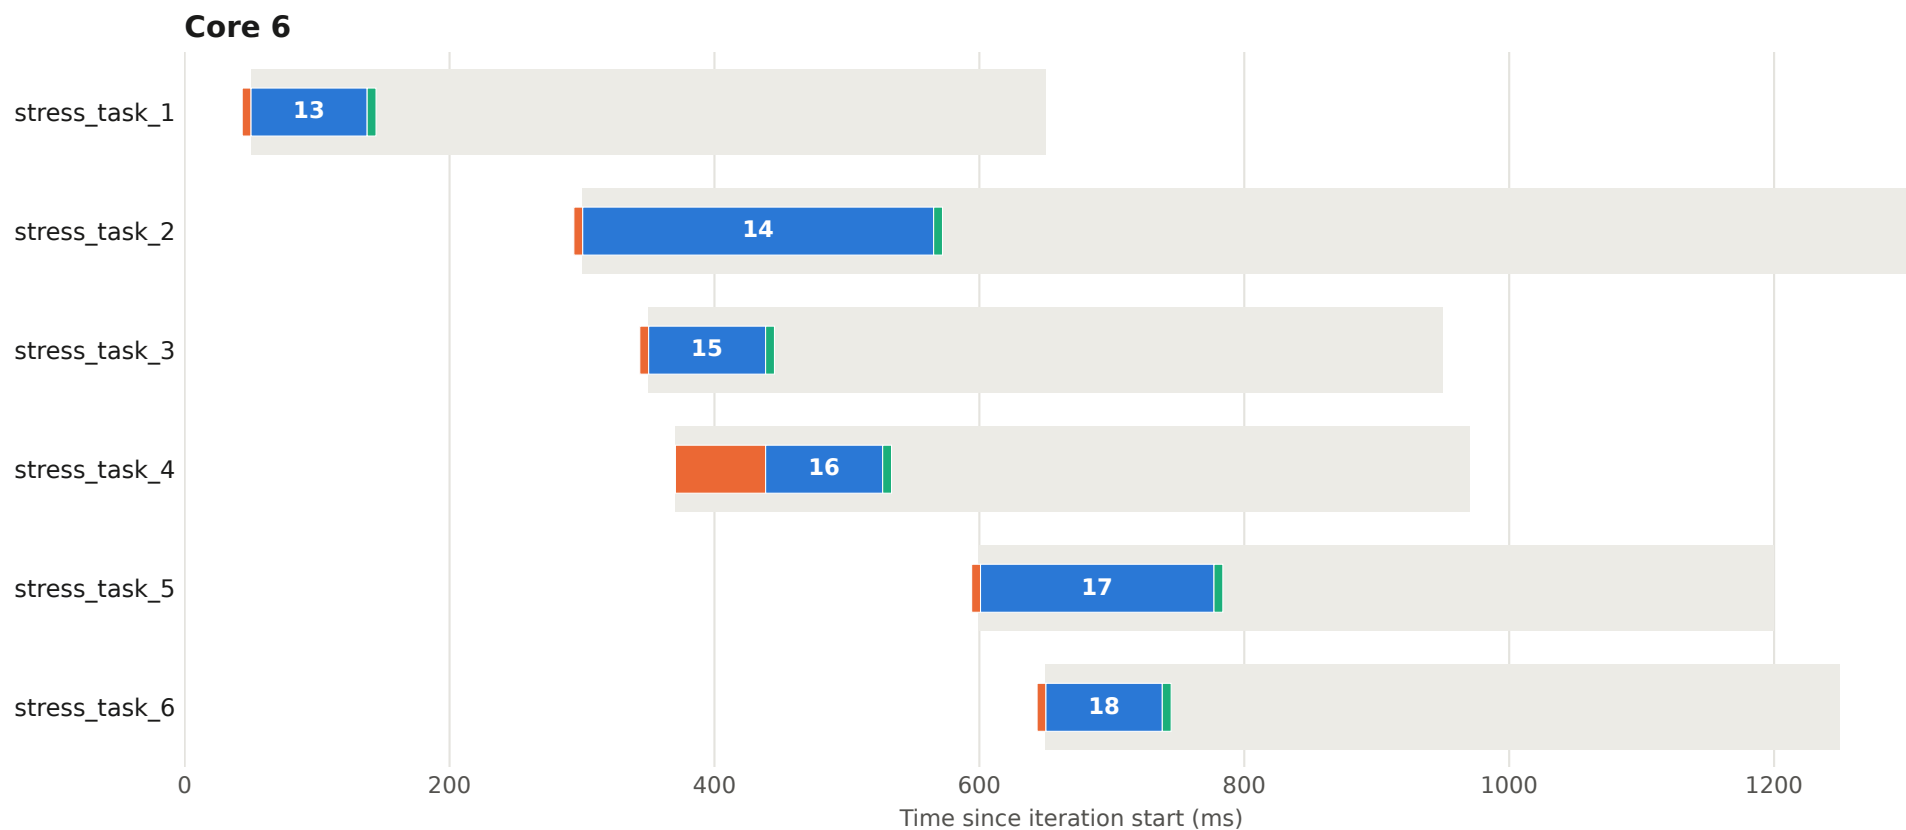


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 66 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

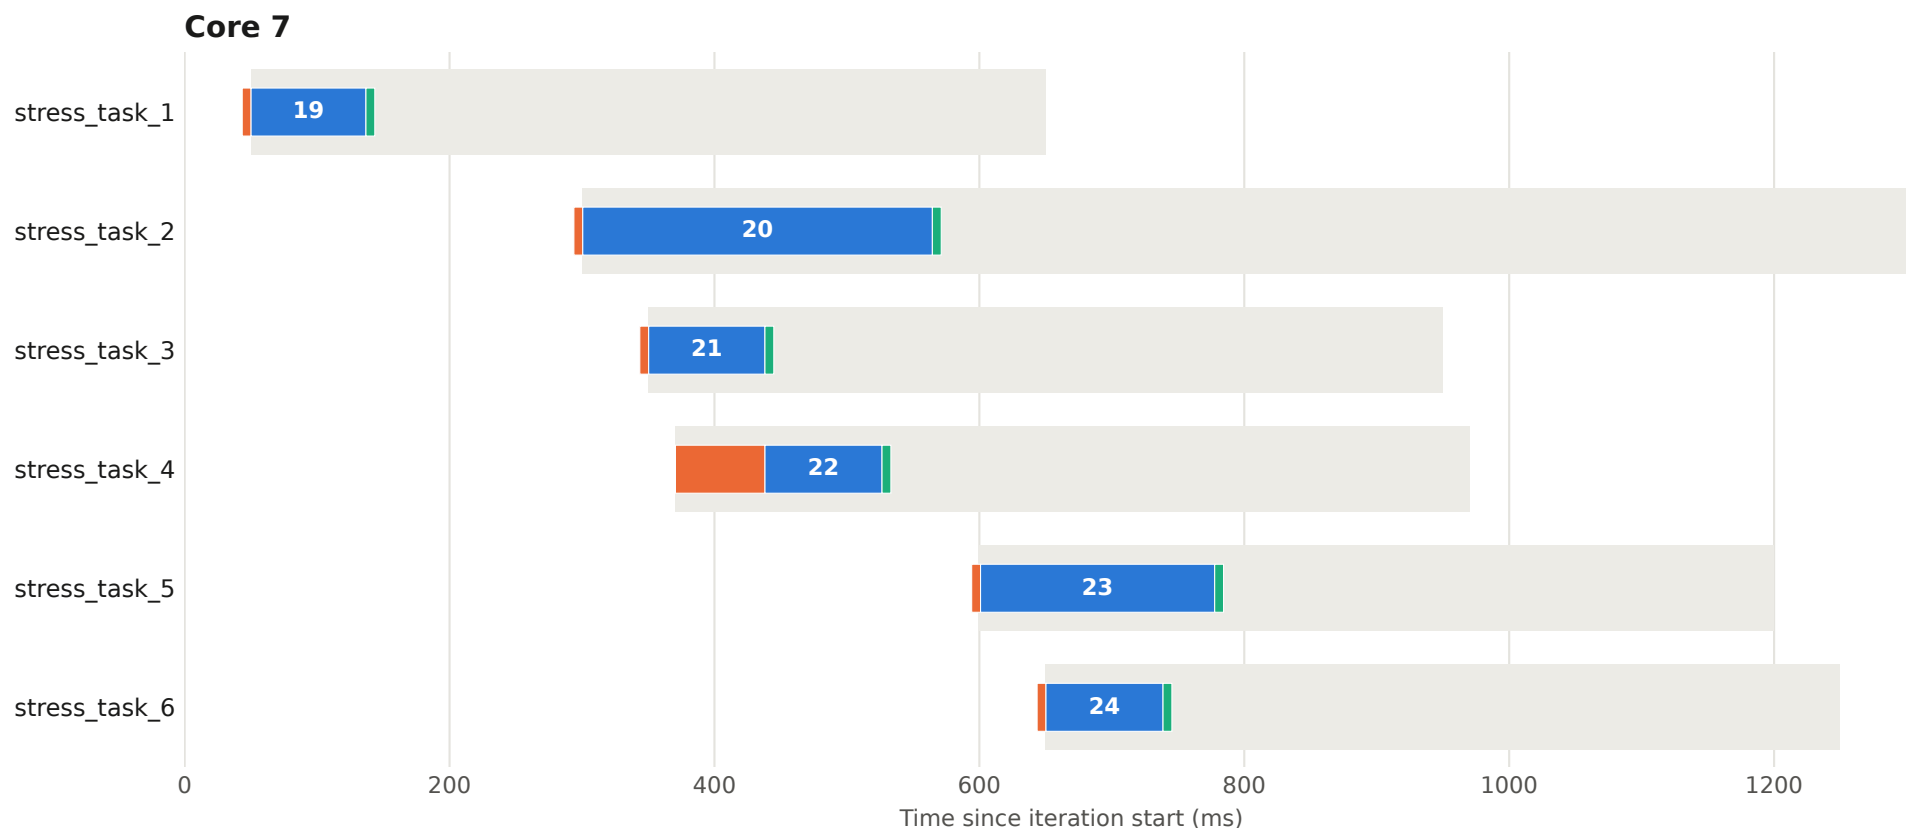


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 67 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

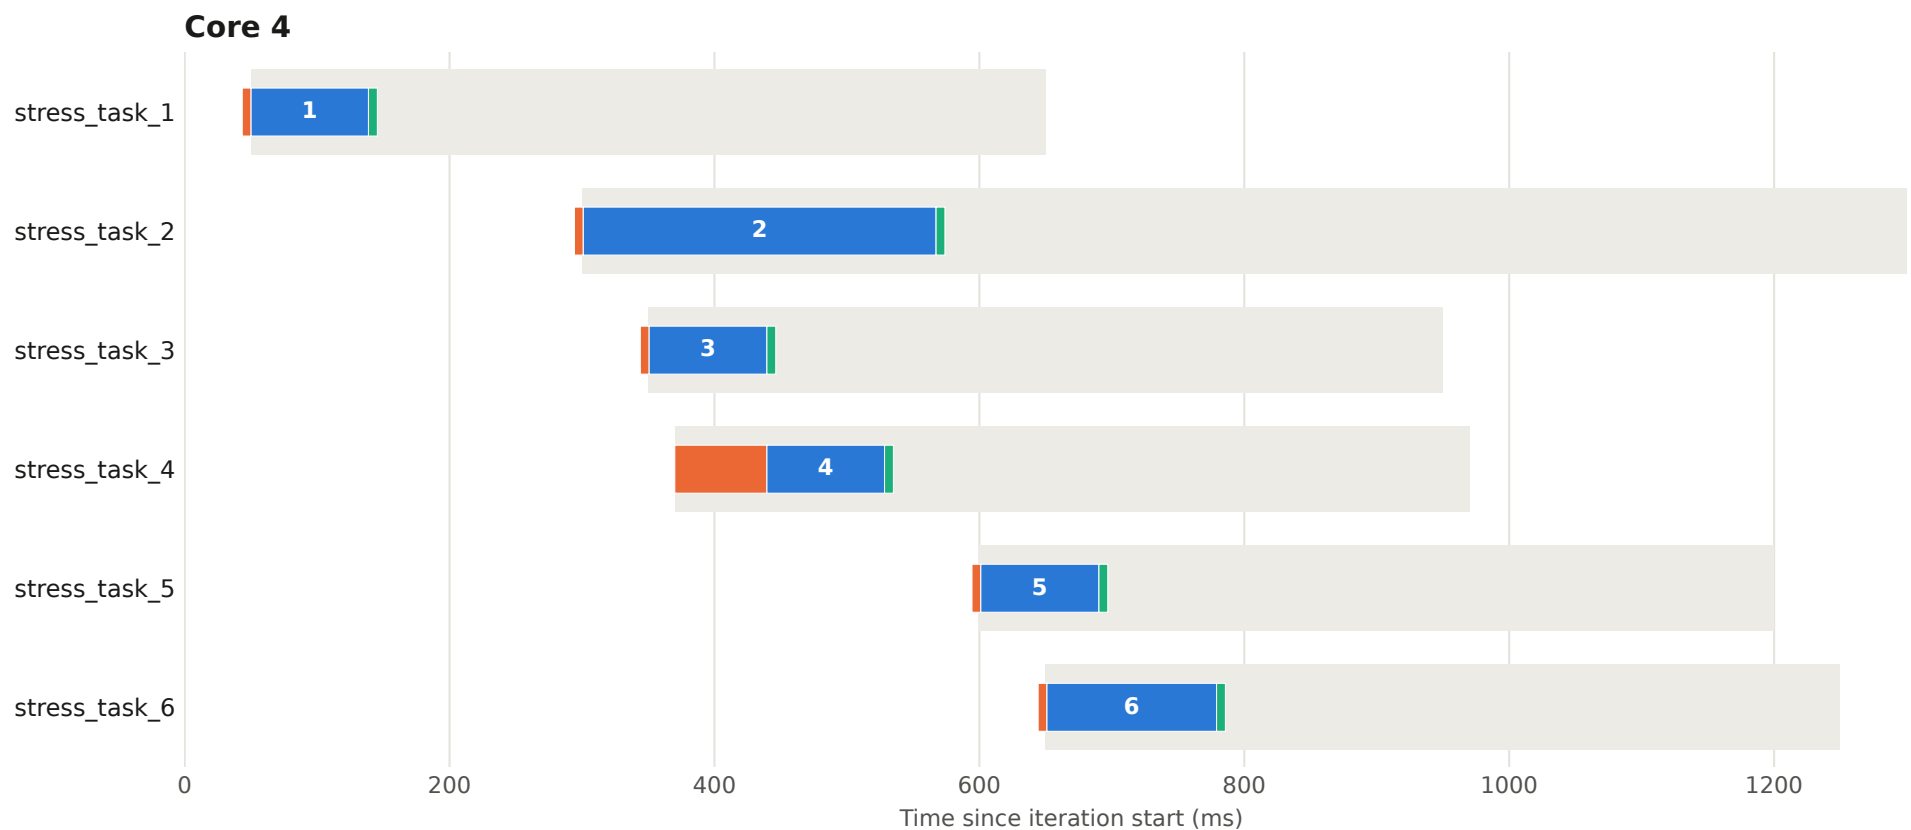


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 67 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

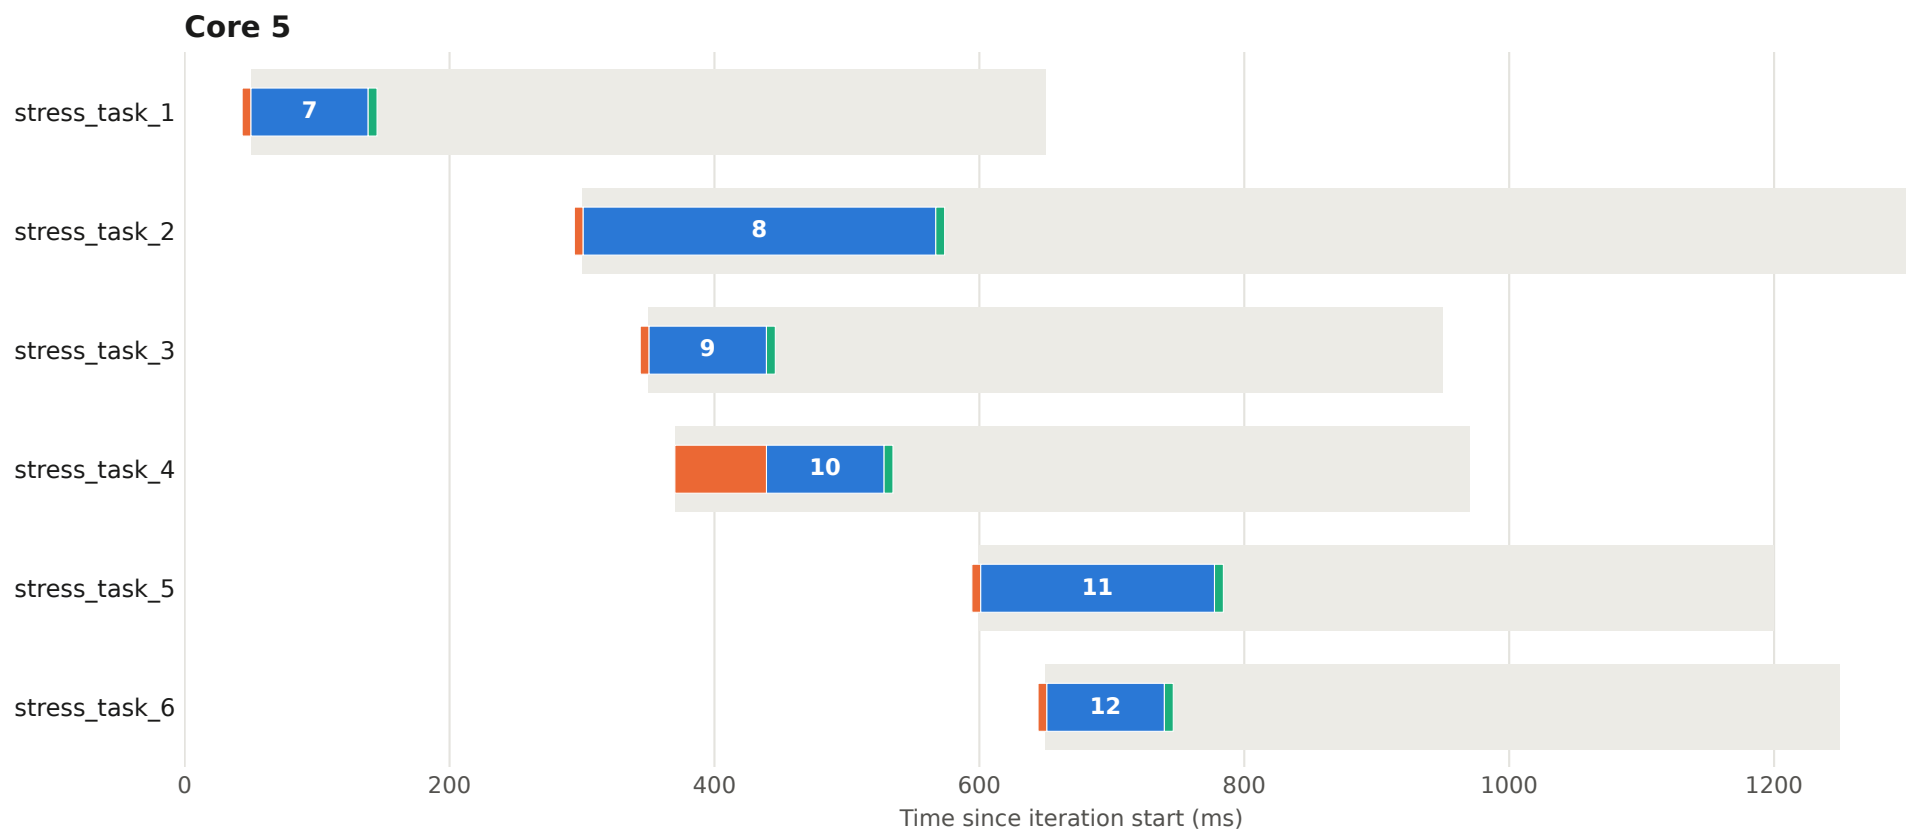


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 67 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

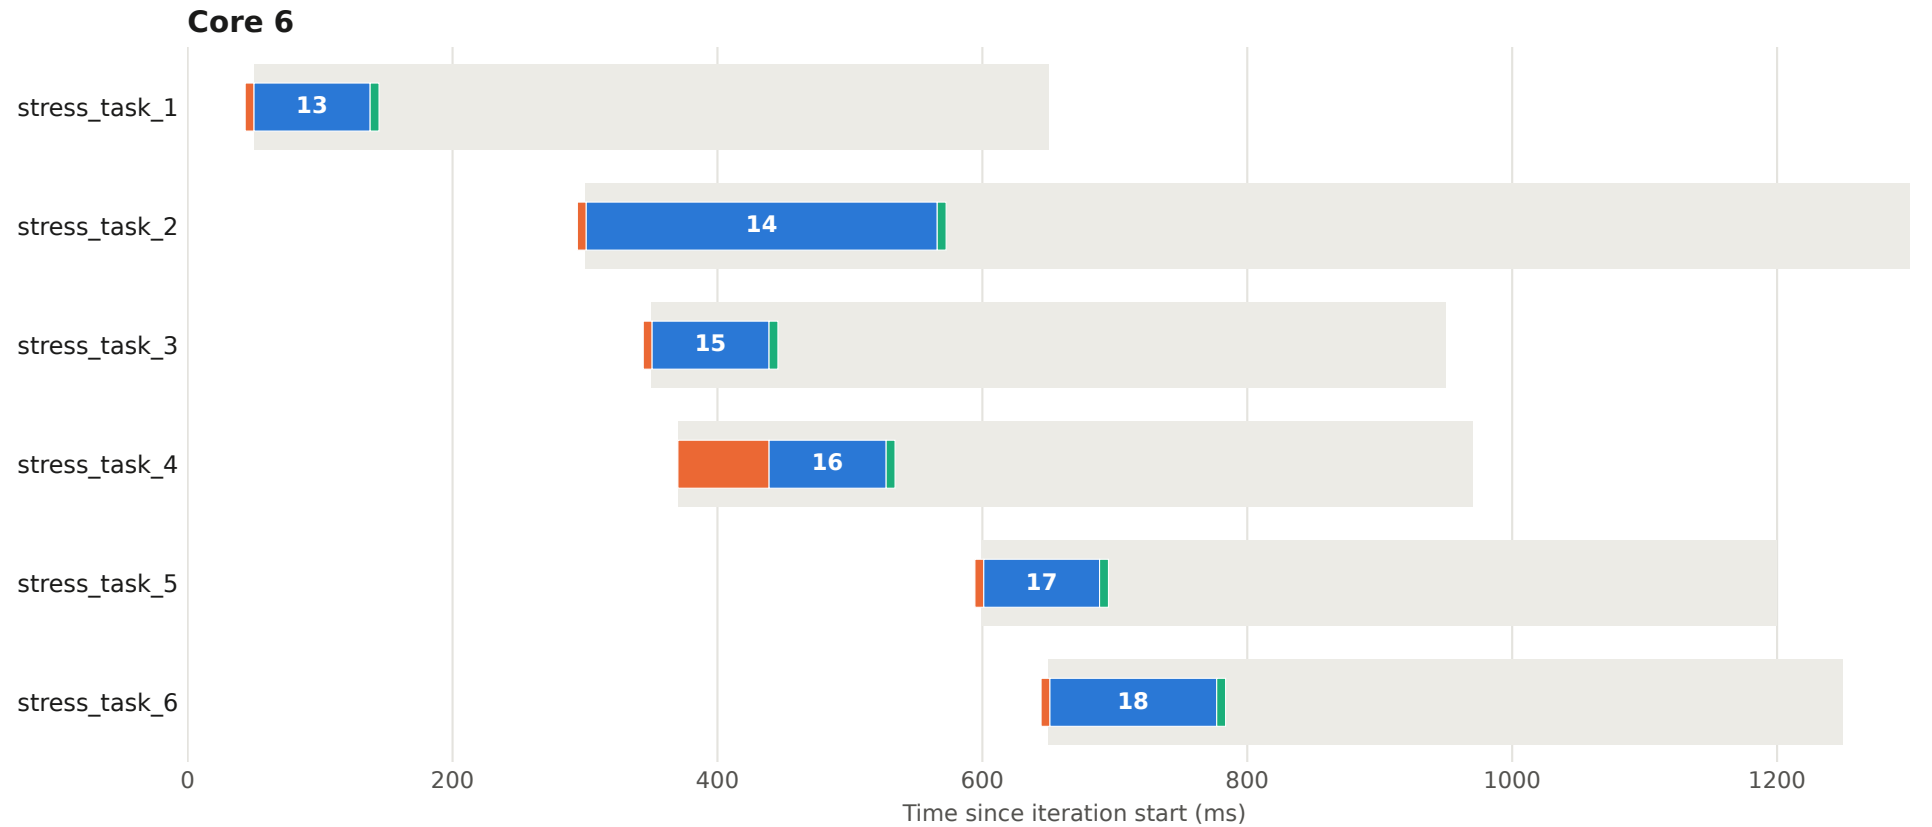


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 67 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

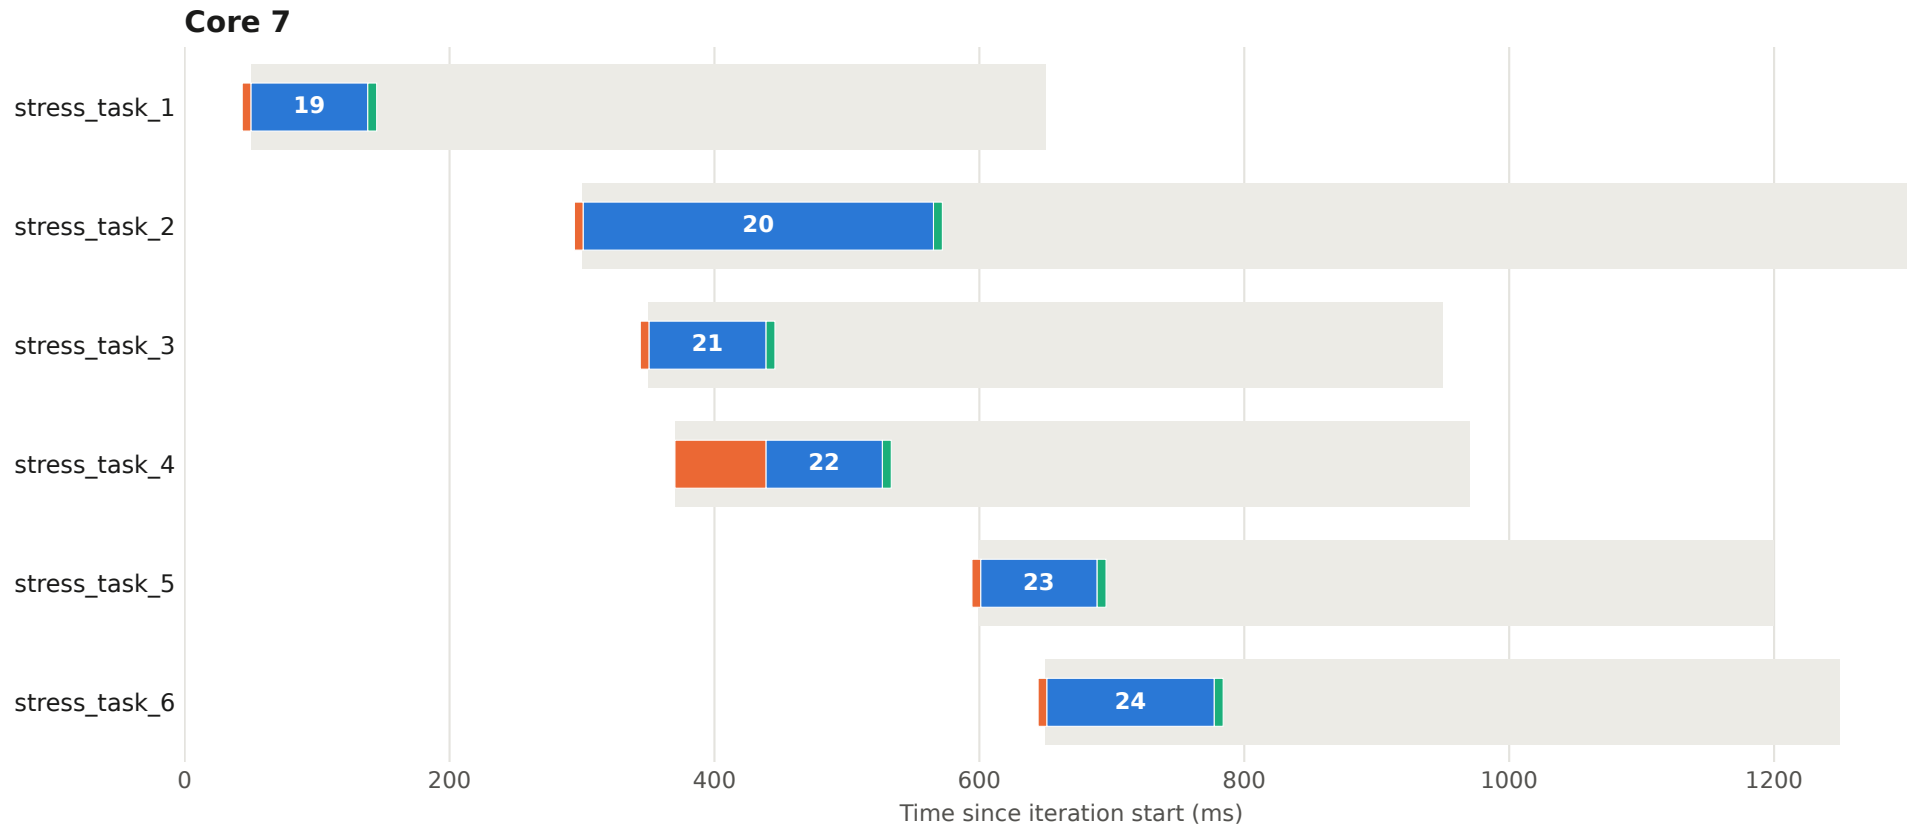


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 68 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

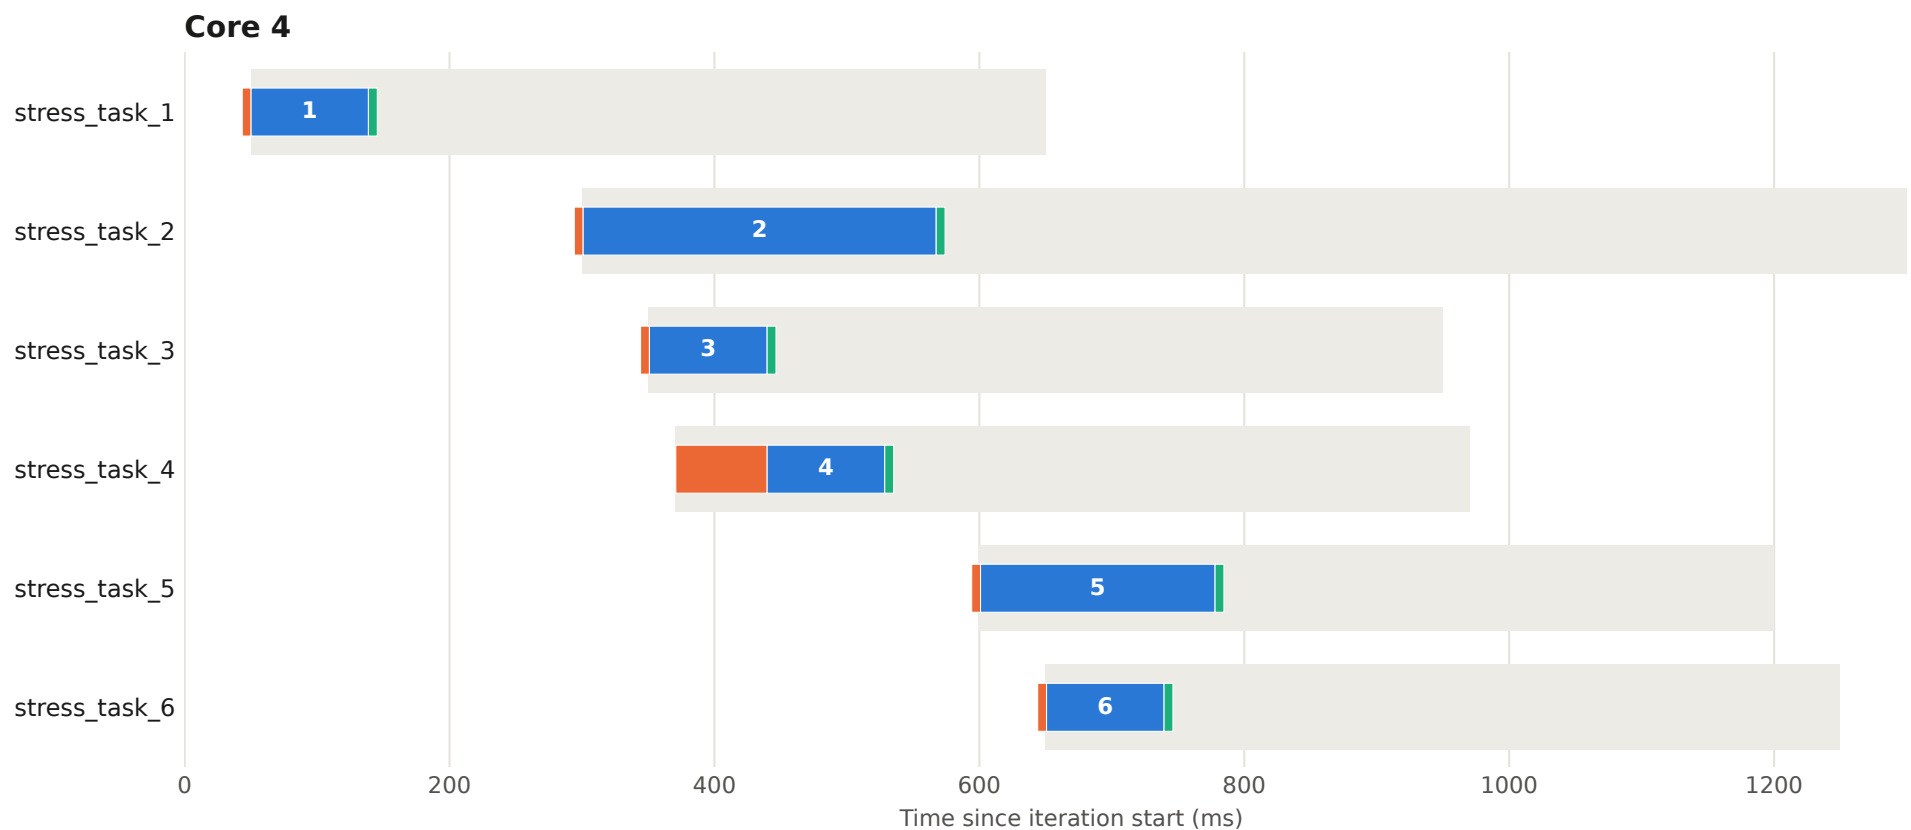


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 68 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

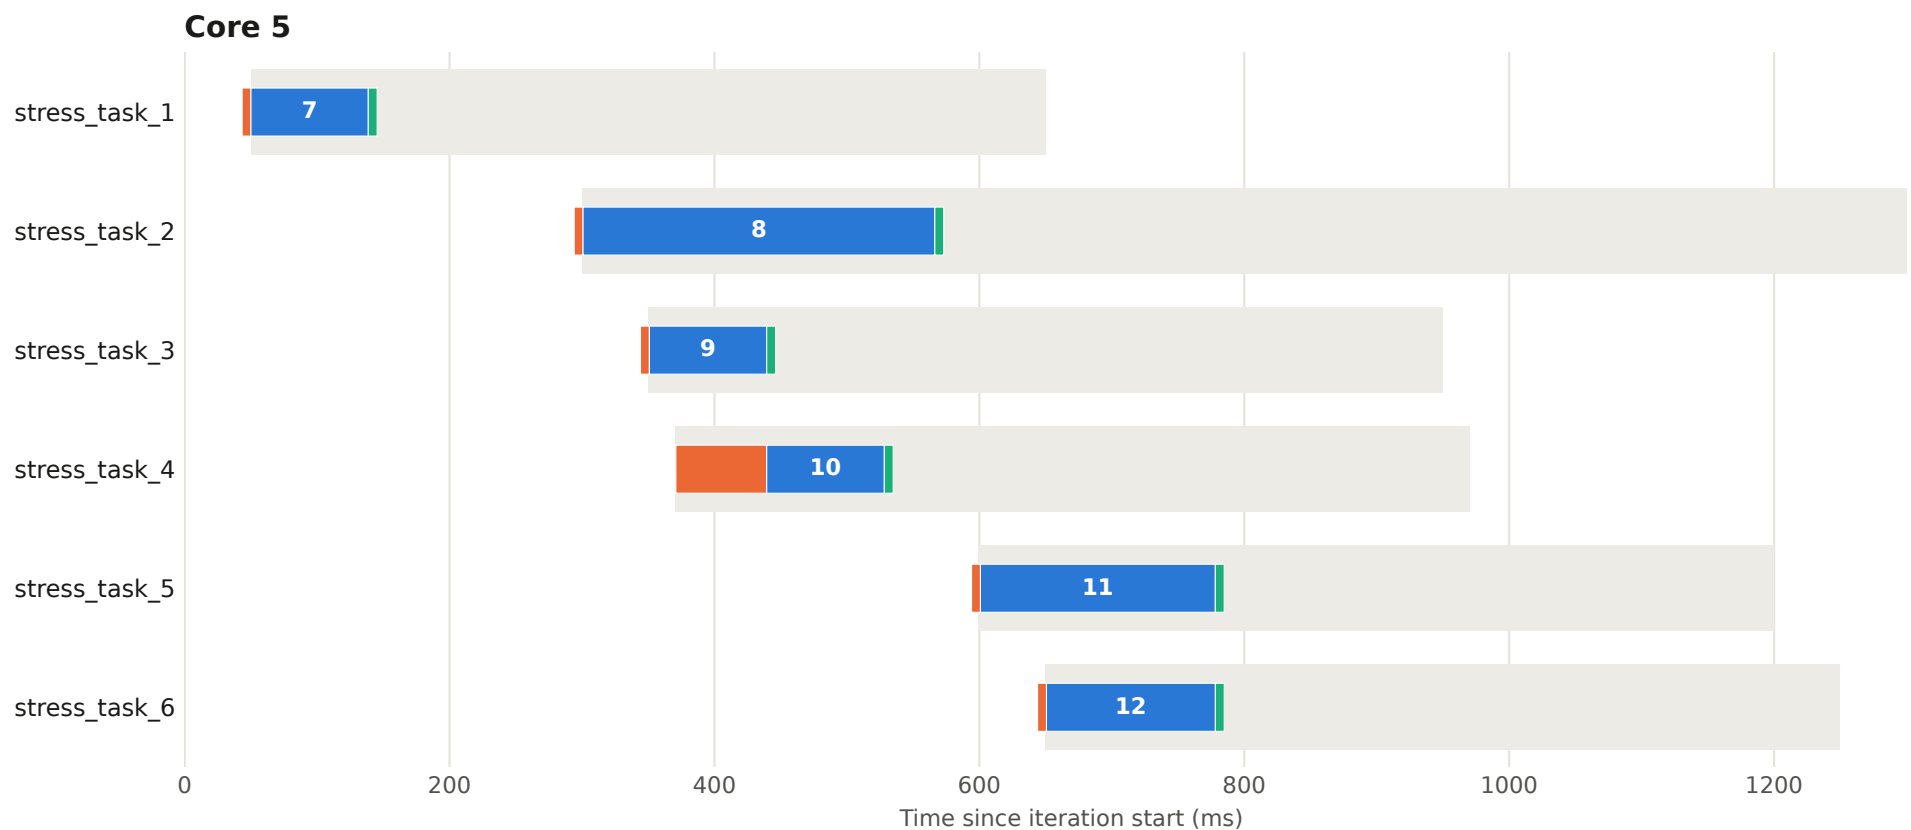


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 68 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

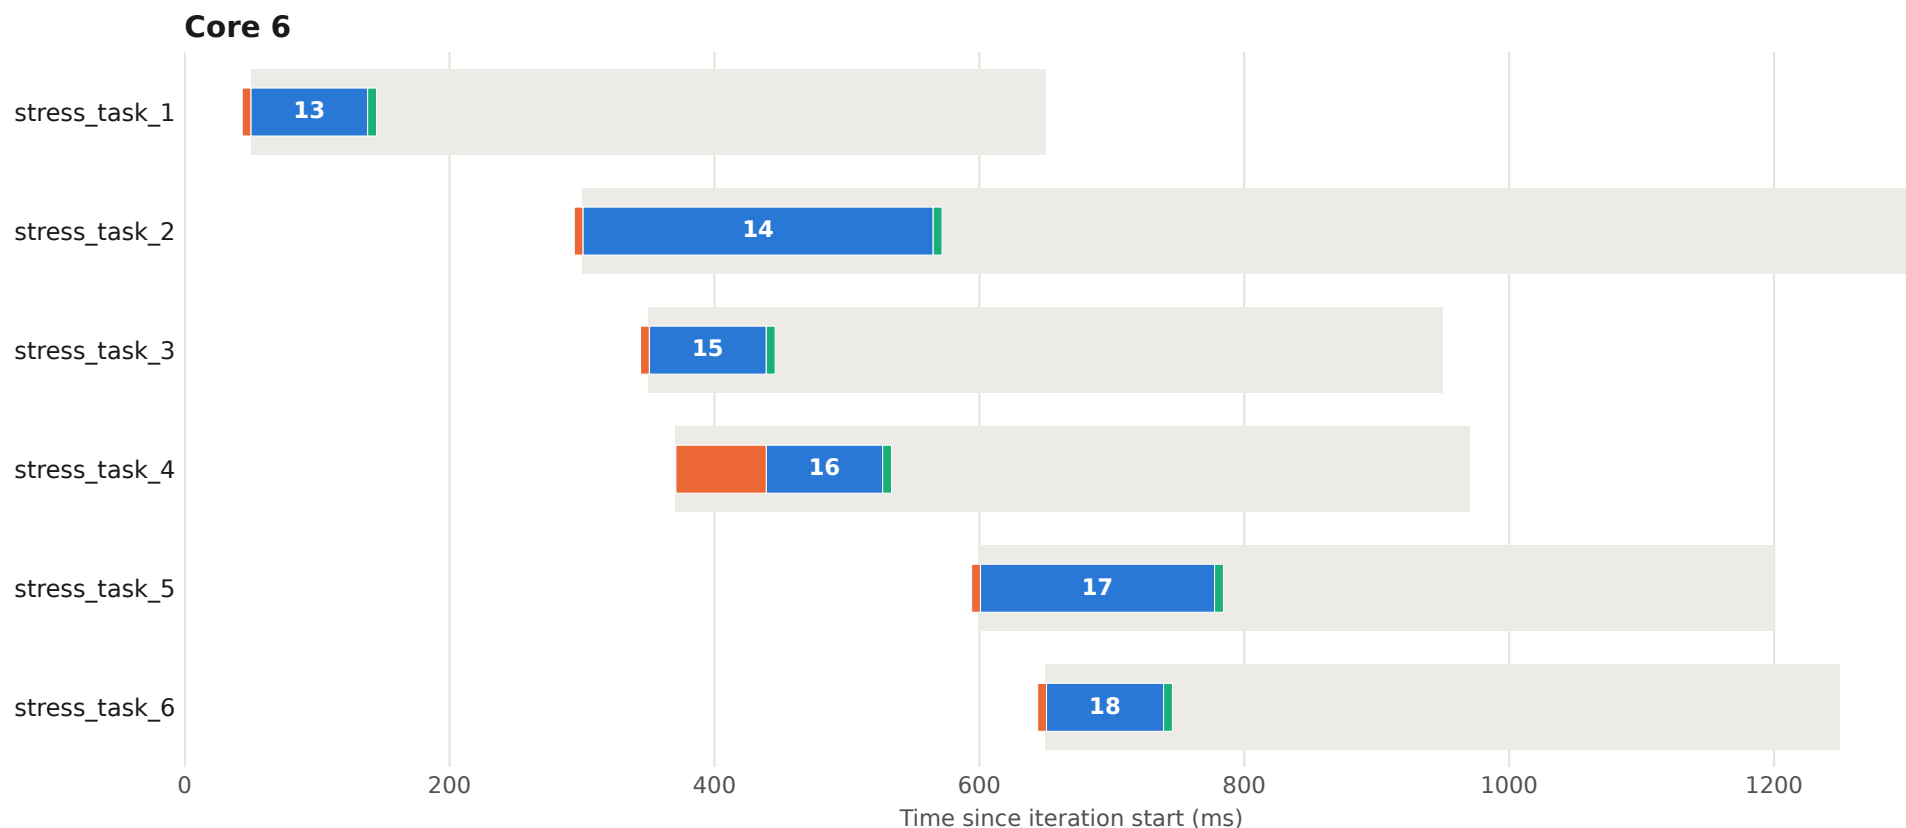


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 68 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

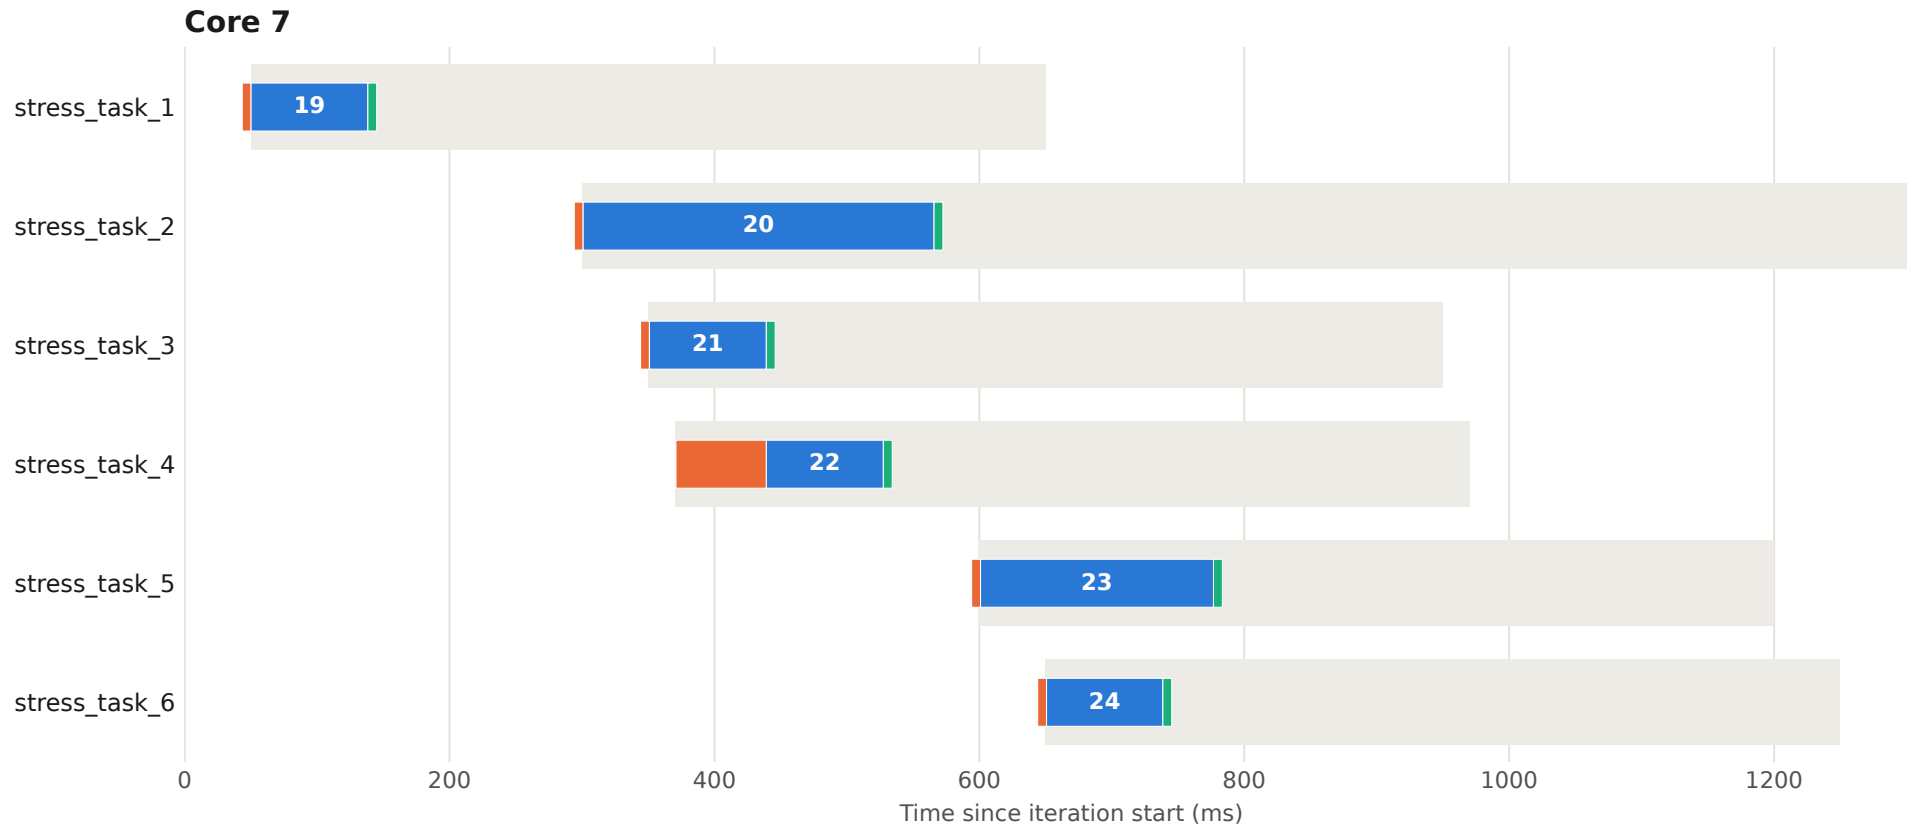


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 69 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

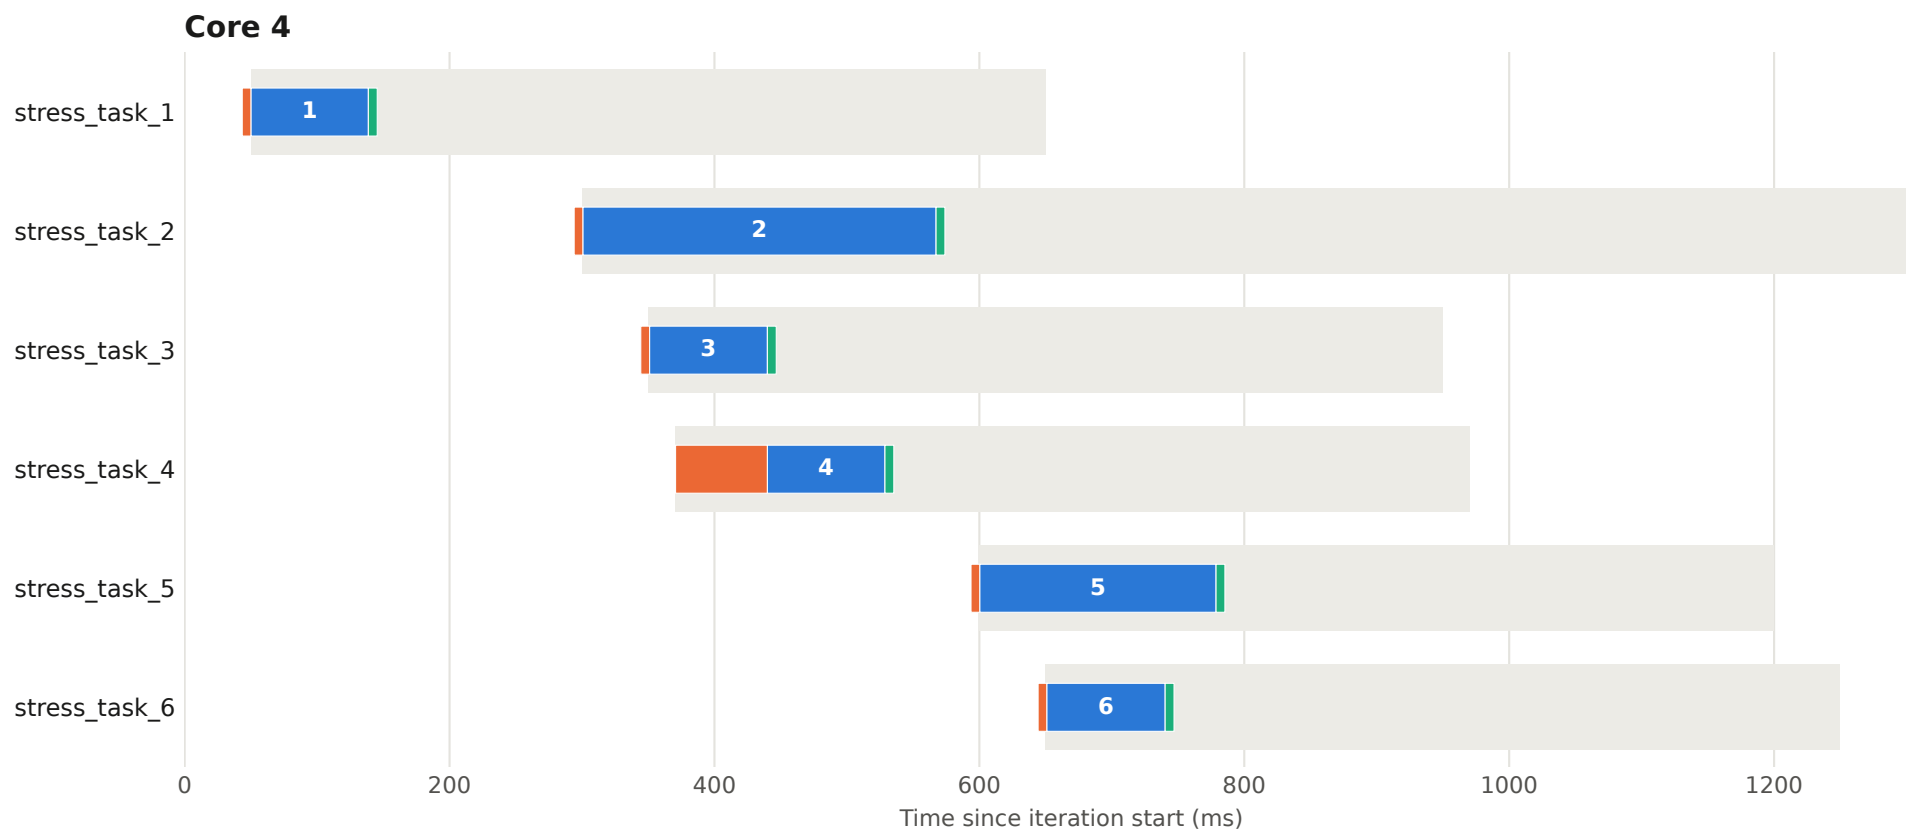


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 69 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

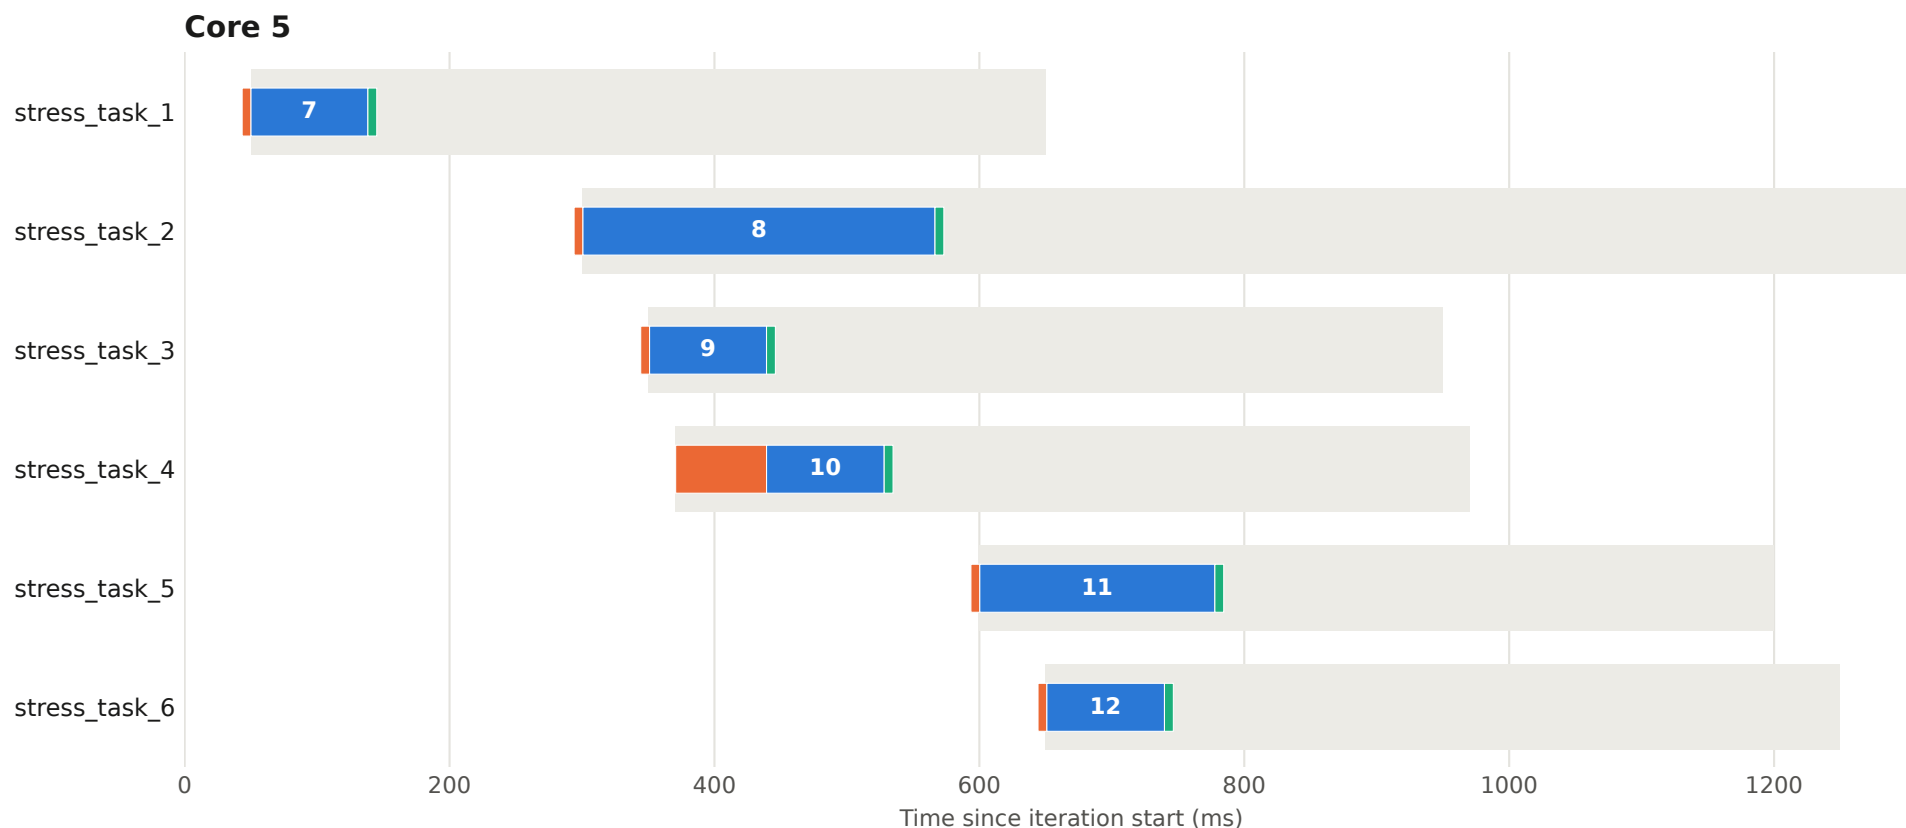


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 69 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

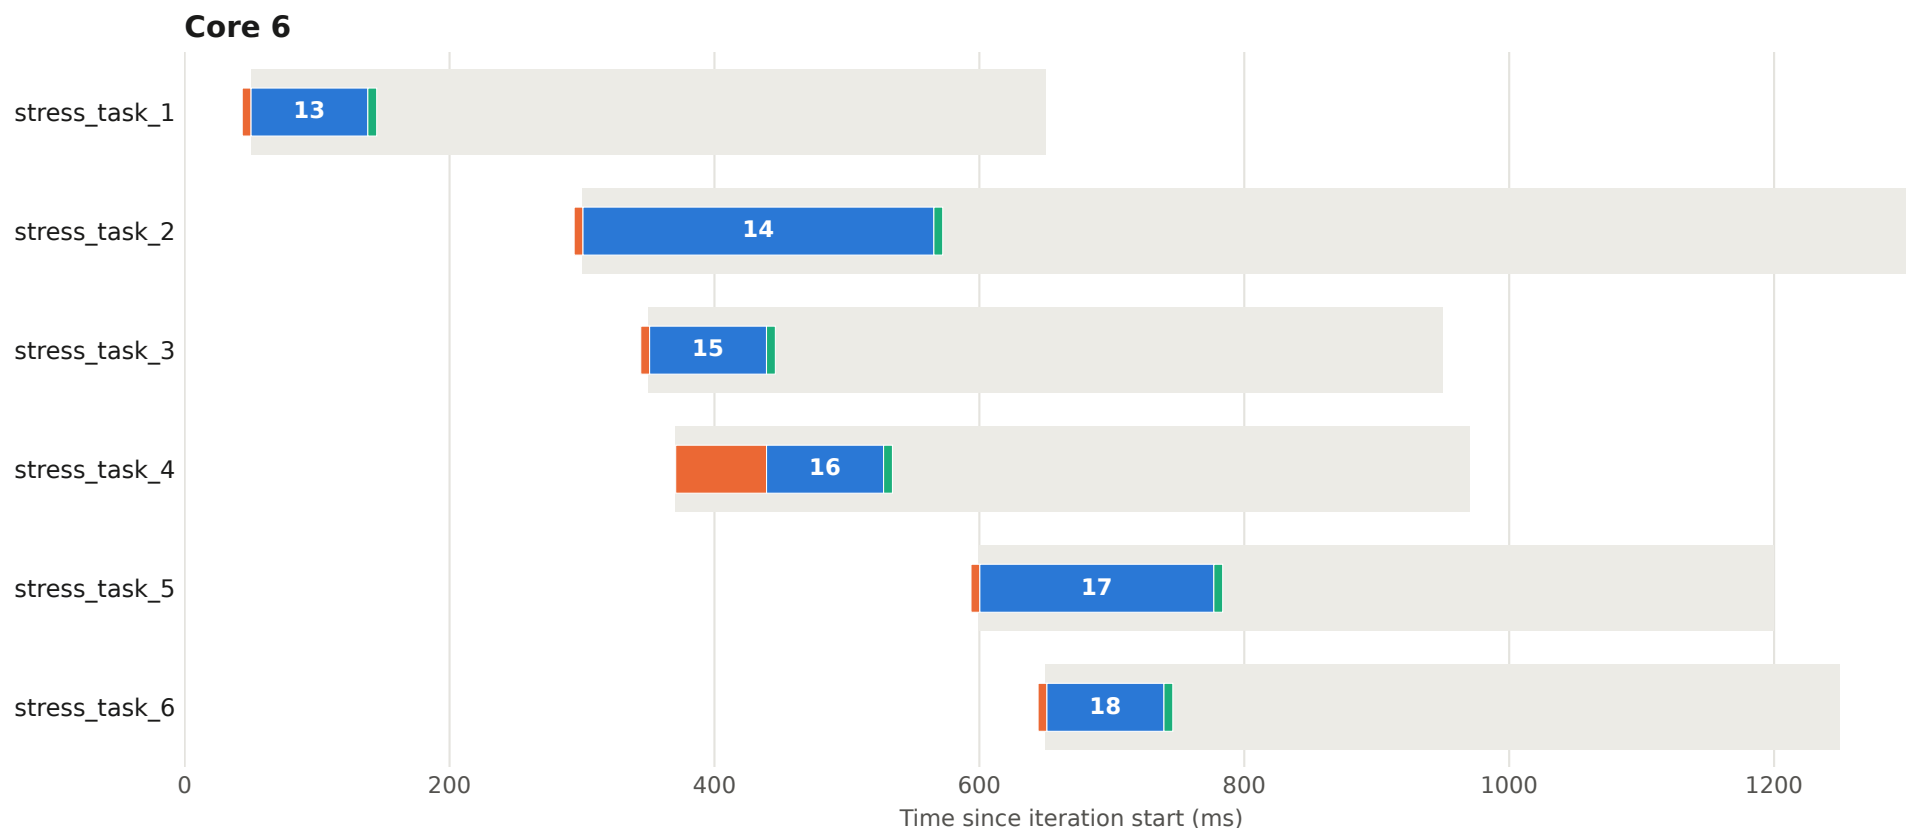


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 69 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

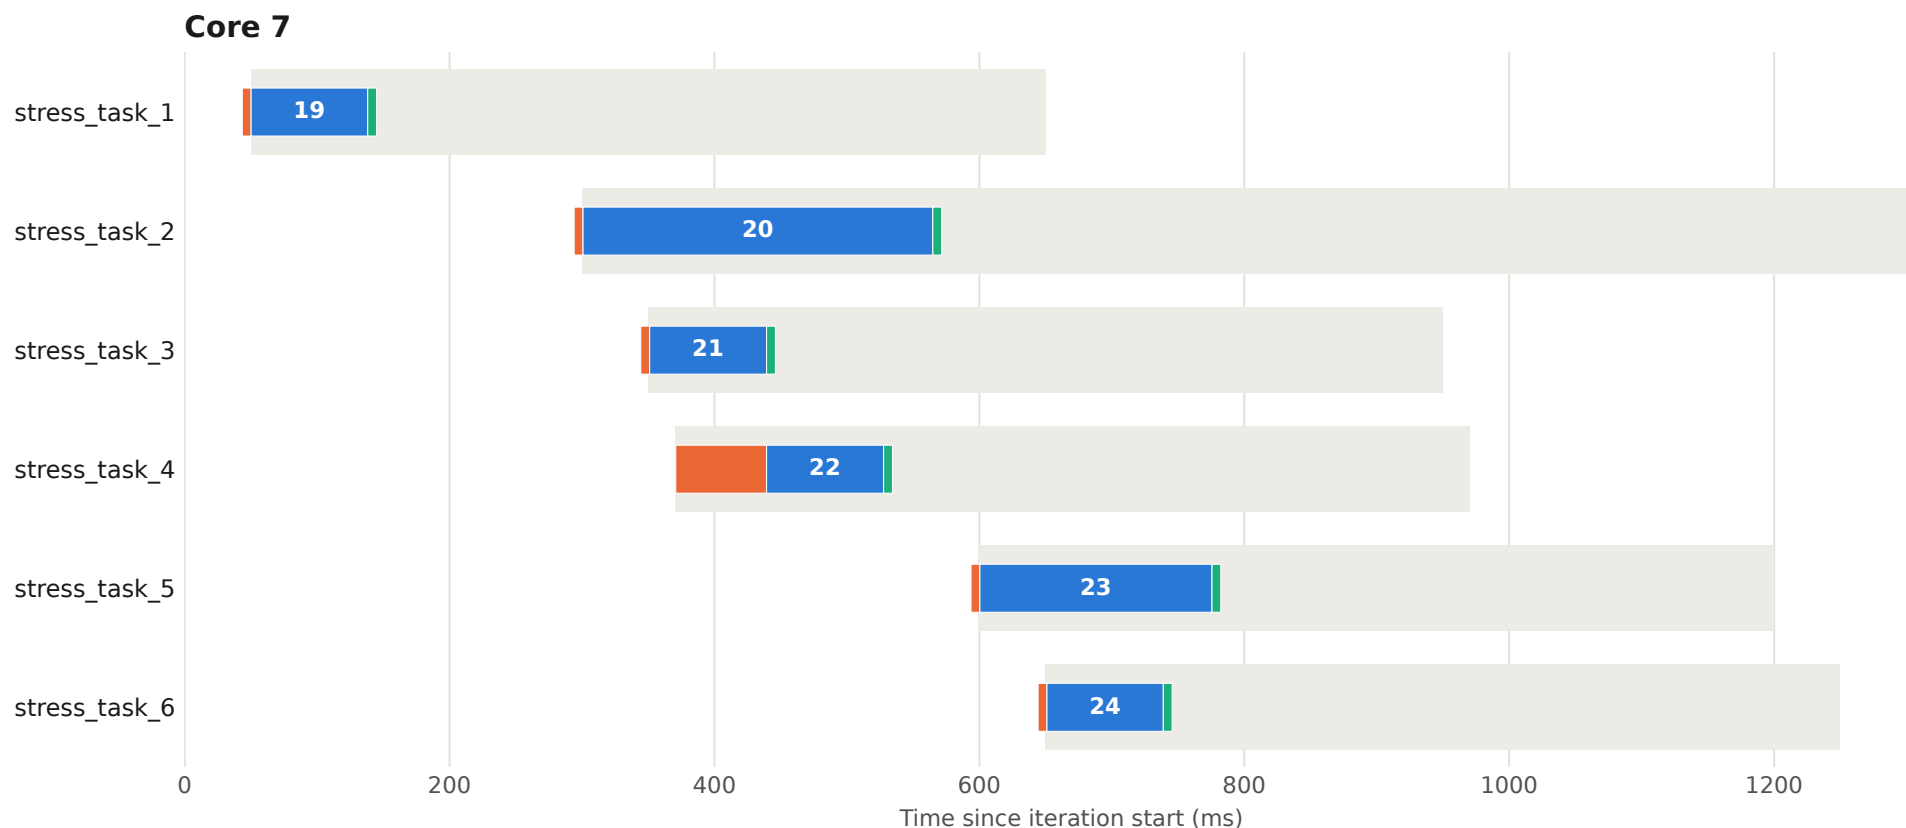


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 70 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

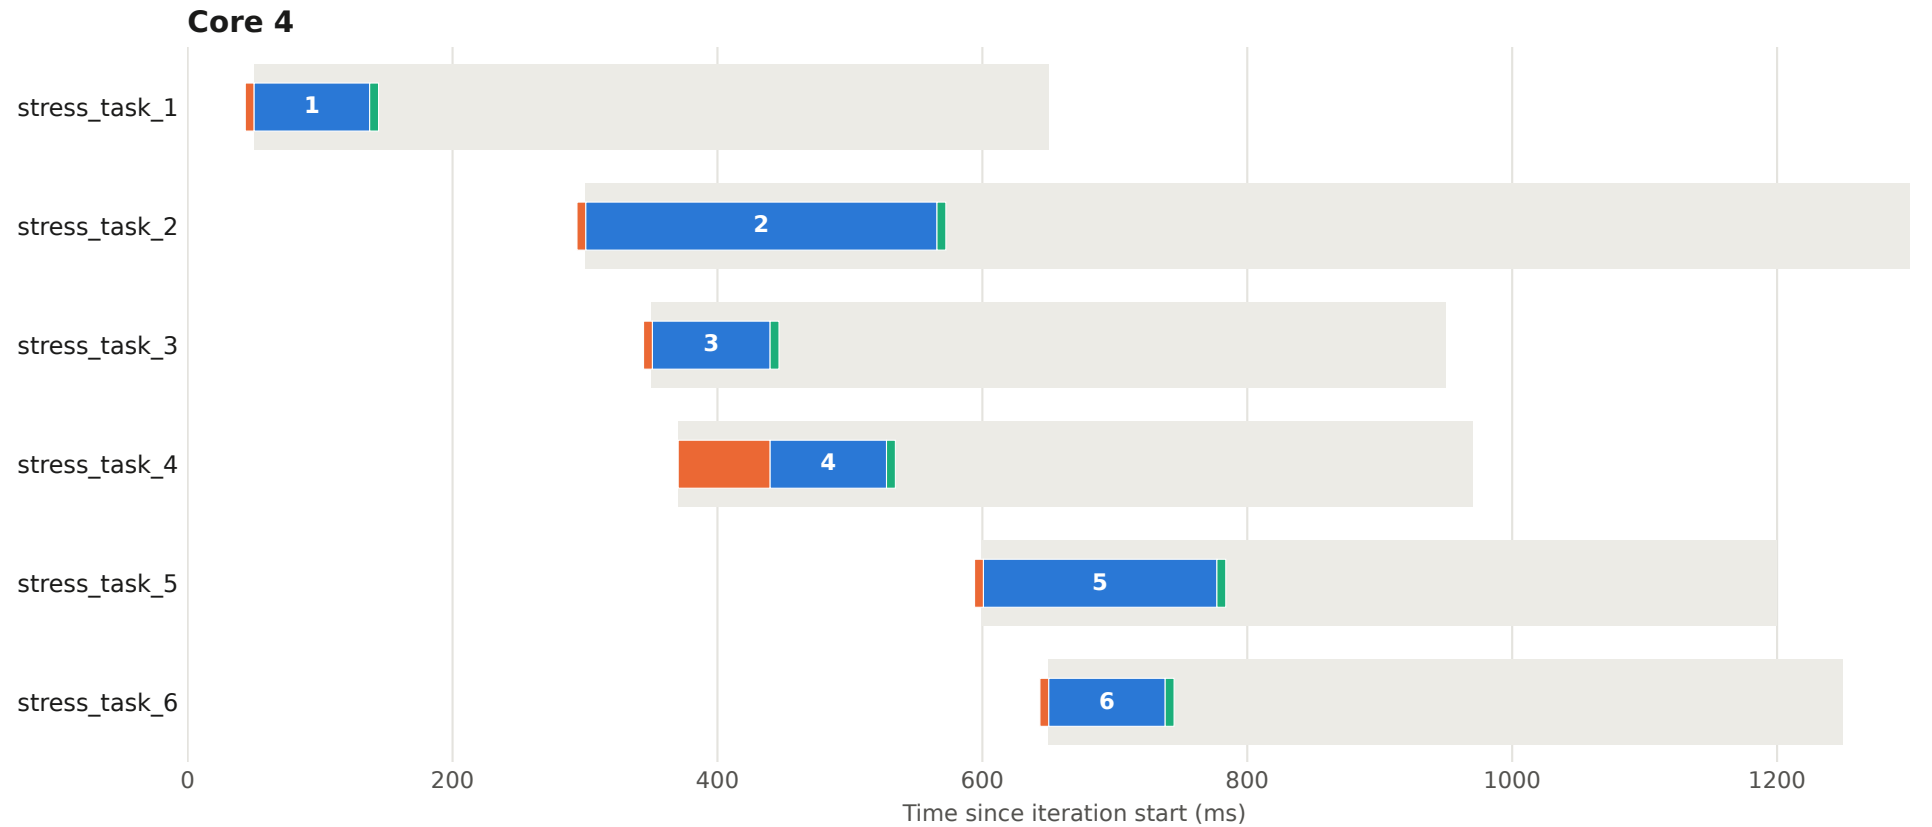


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 70 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

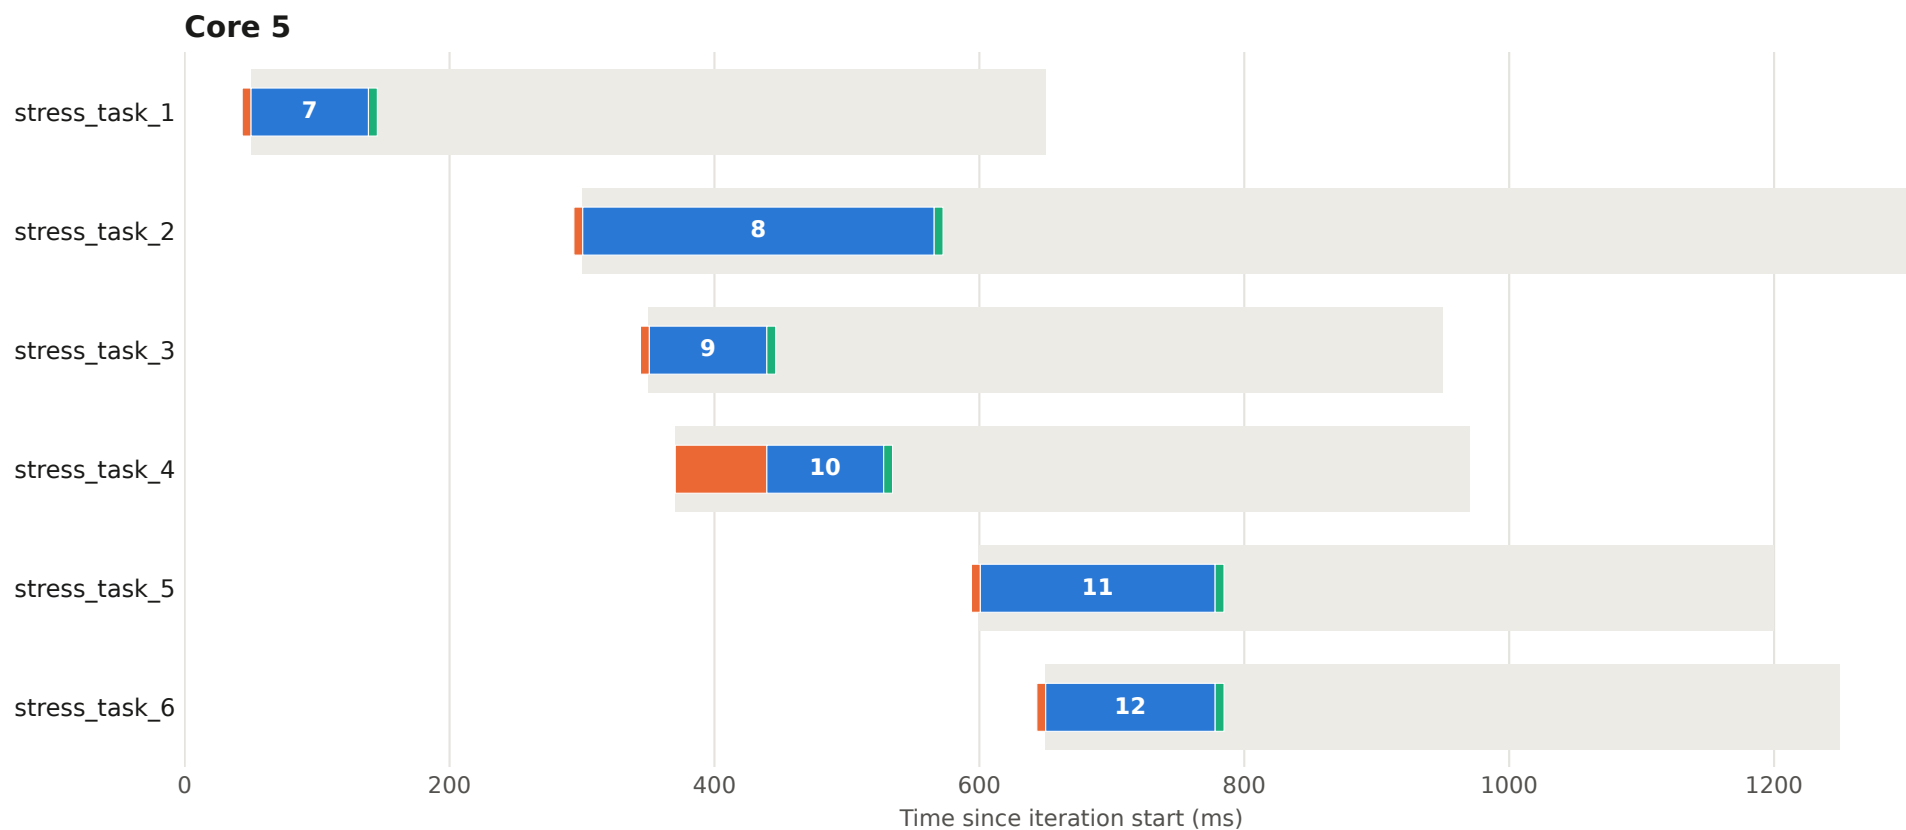


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 70 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

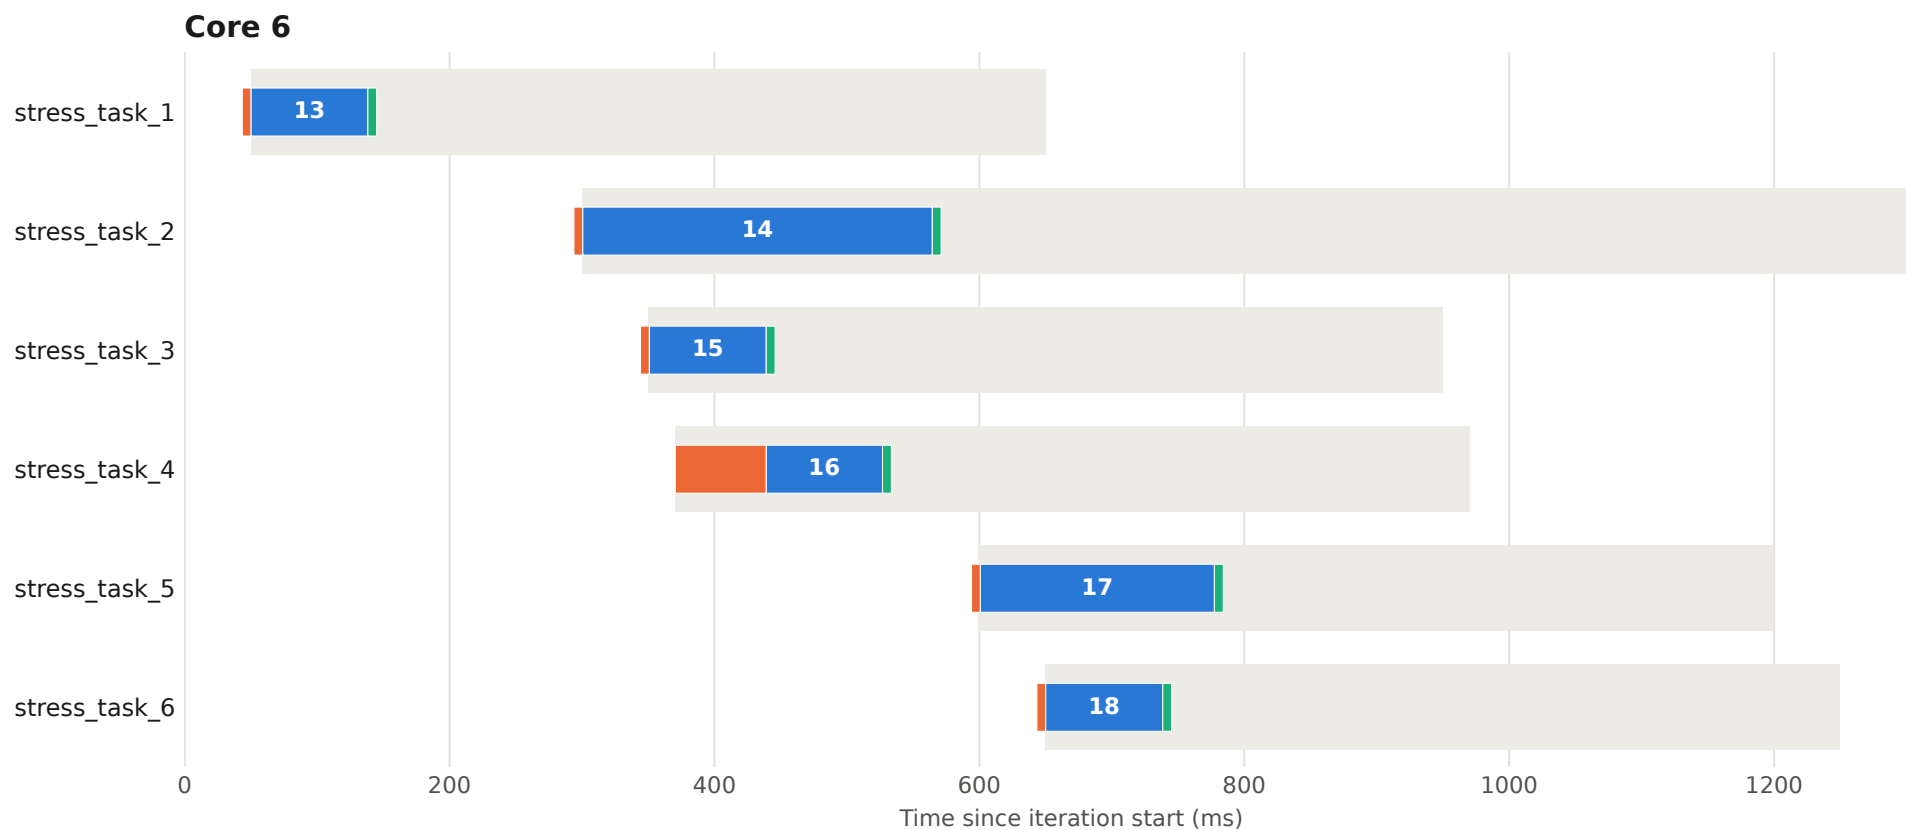


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 70 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

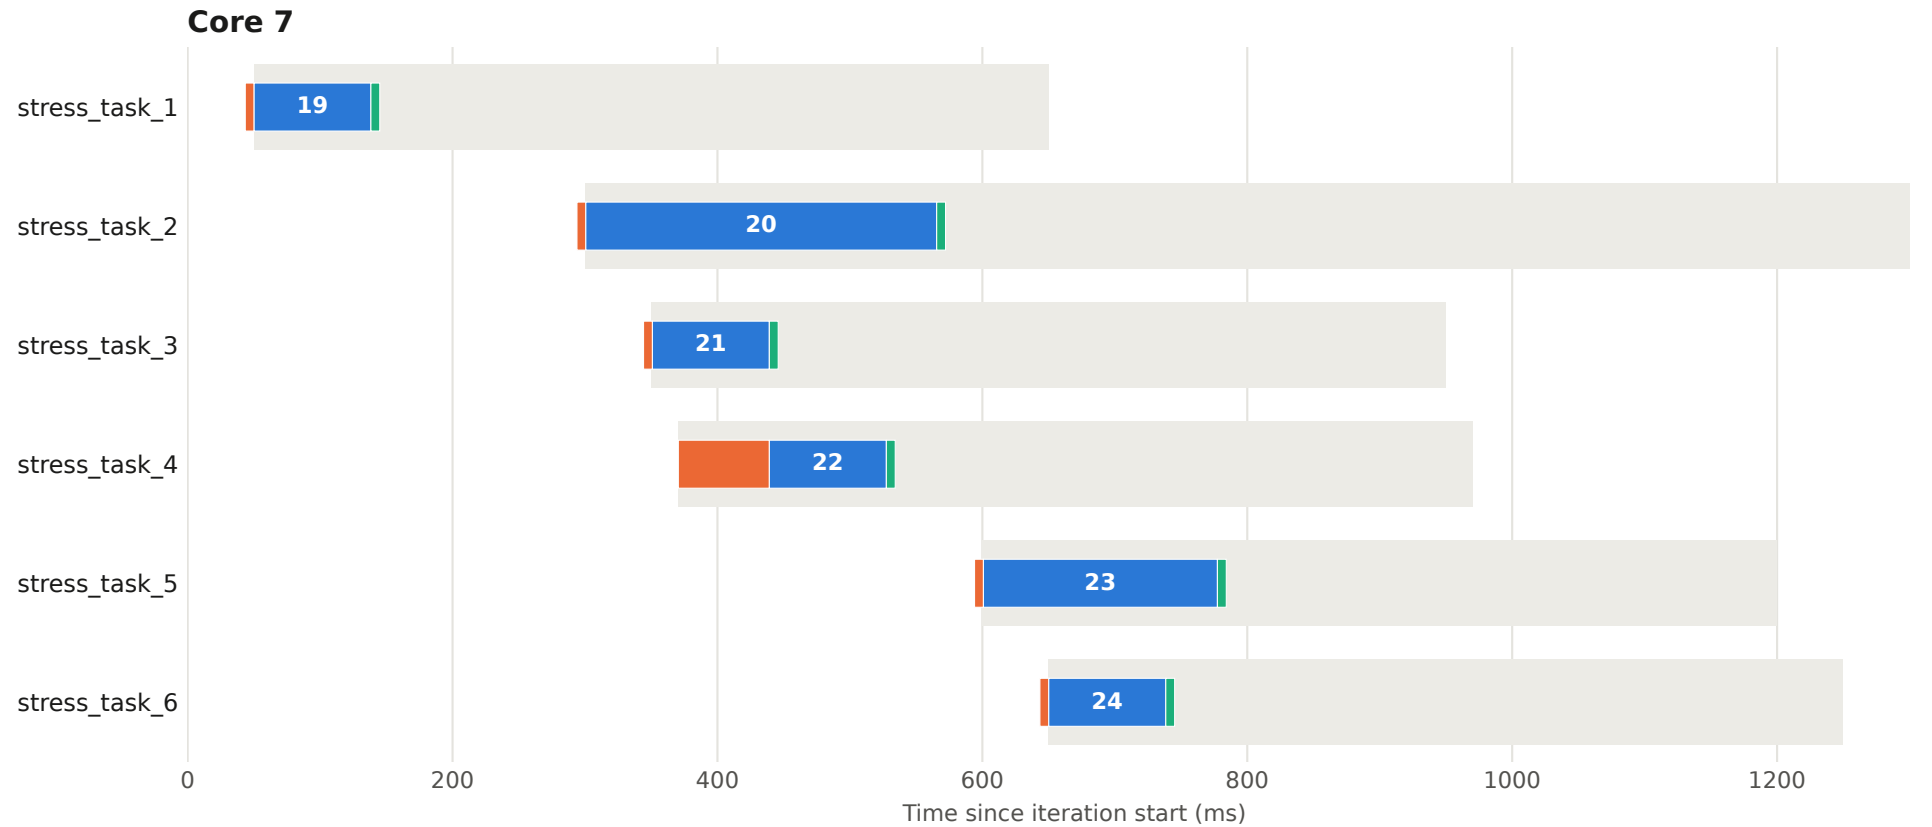


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 71 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

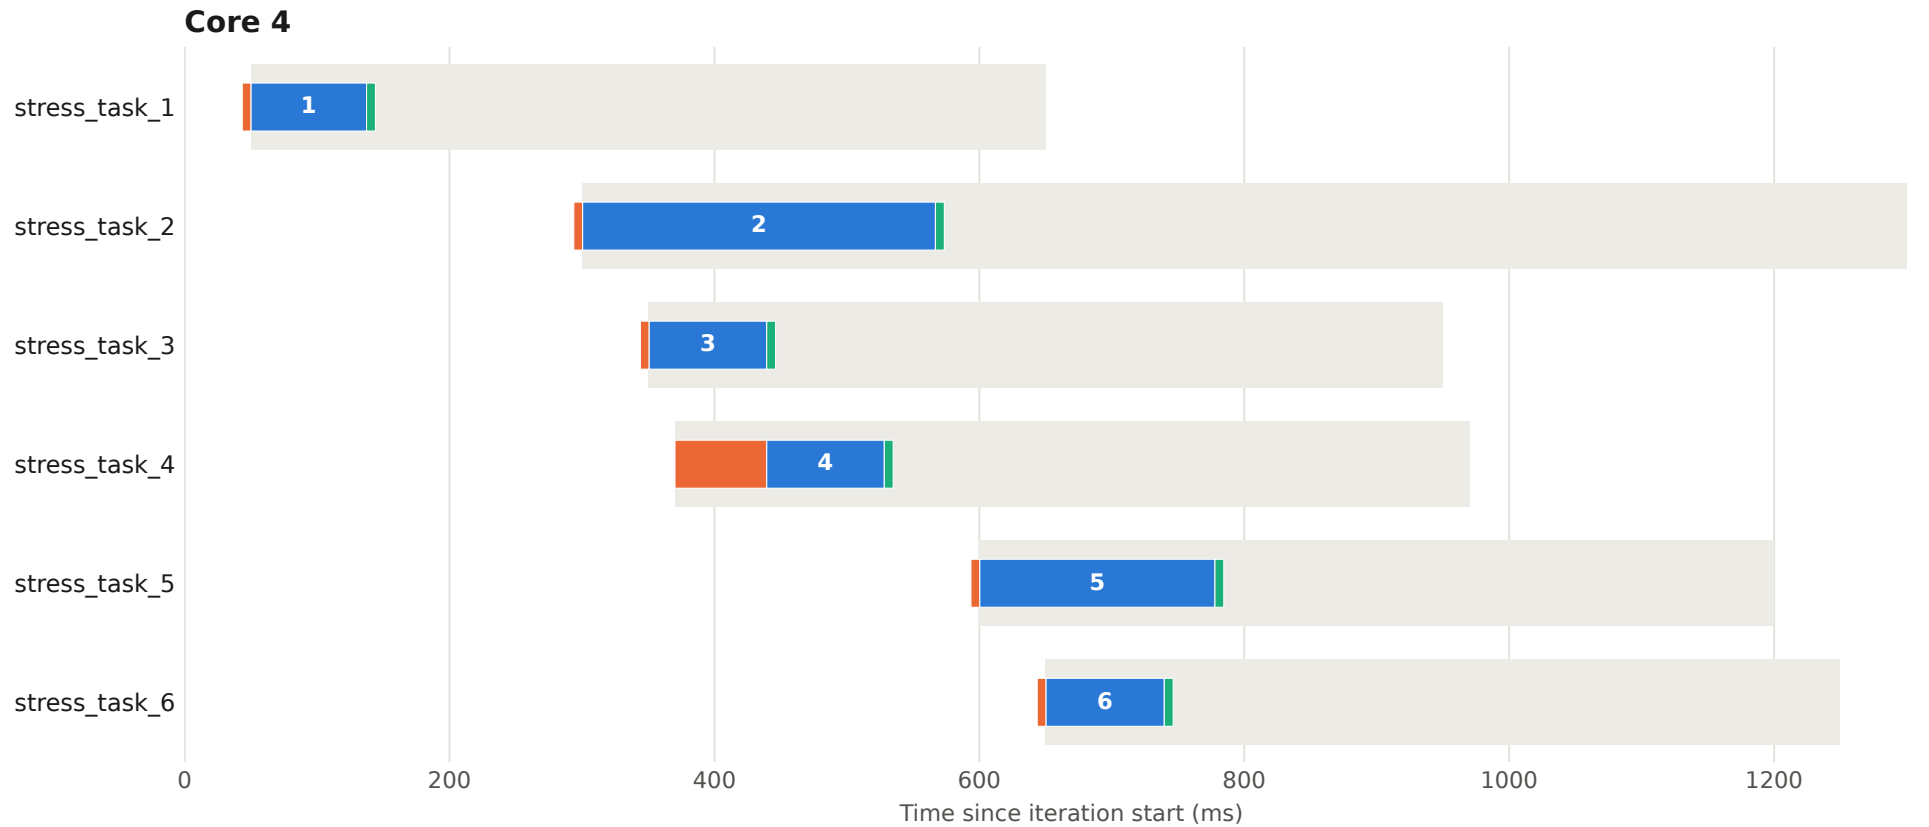


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 71 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

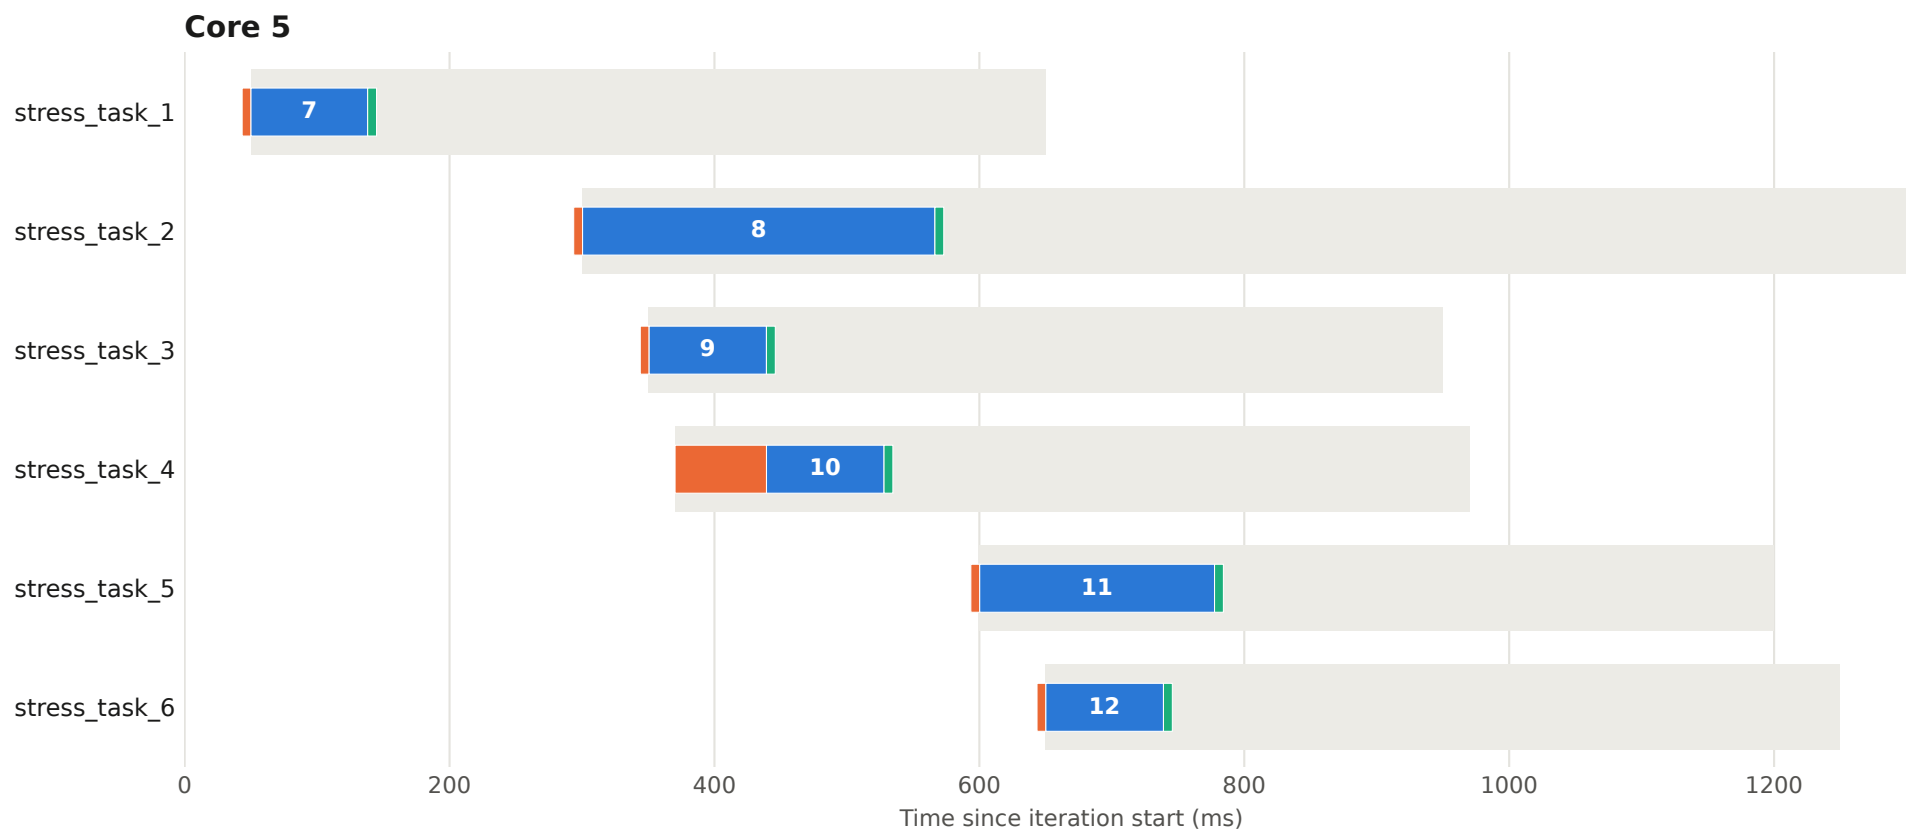


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 71 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

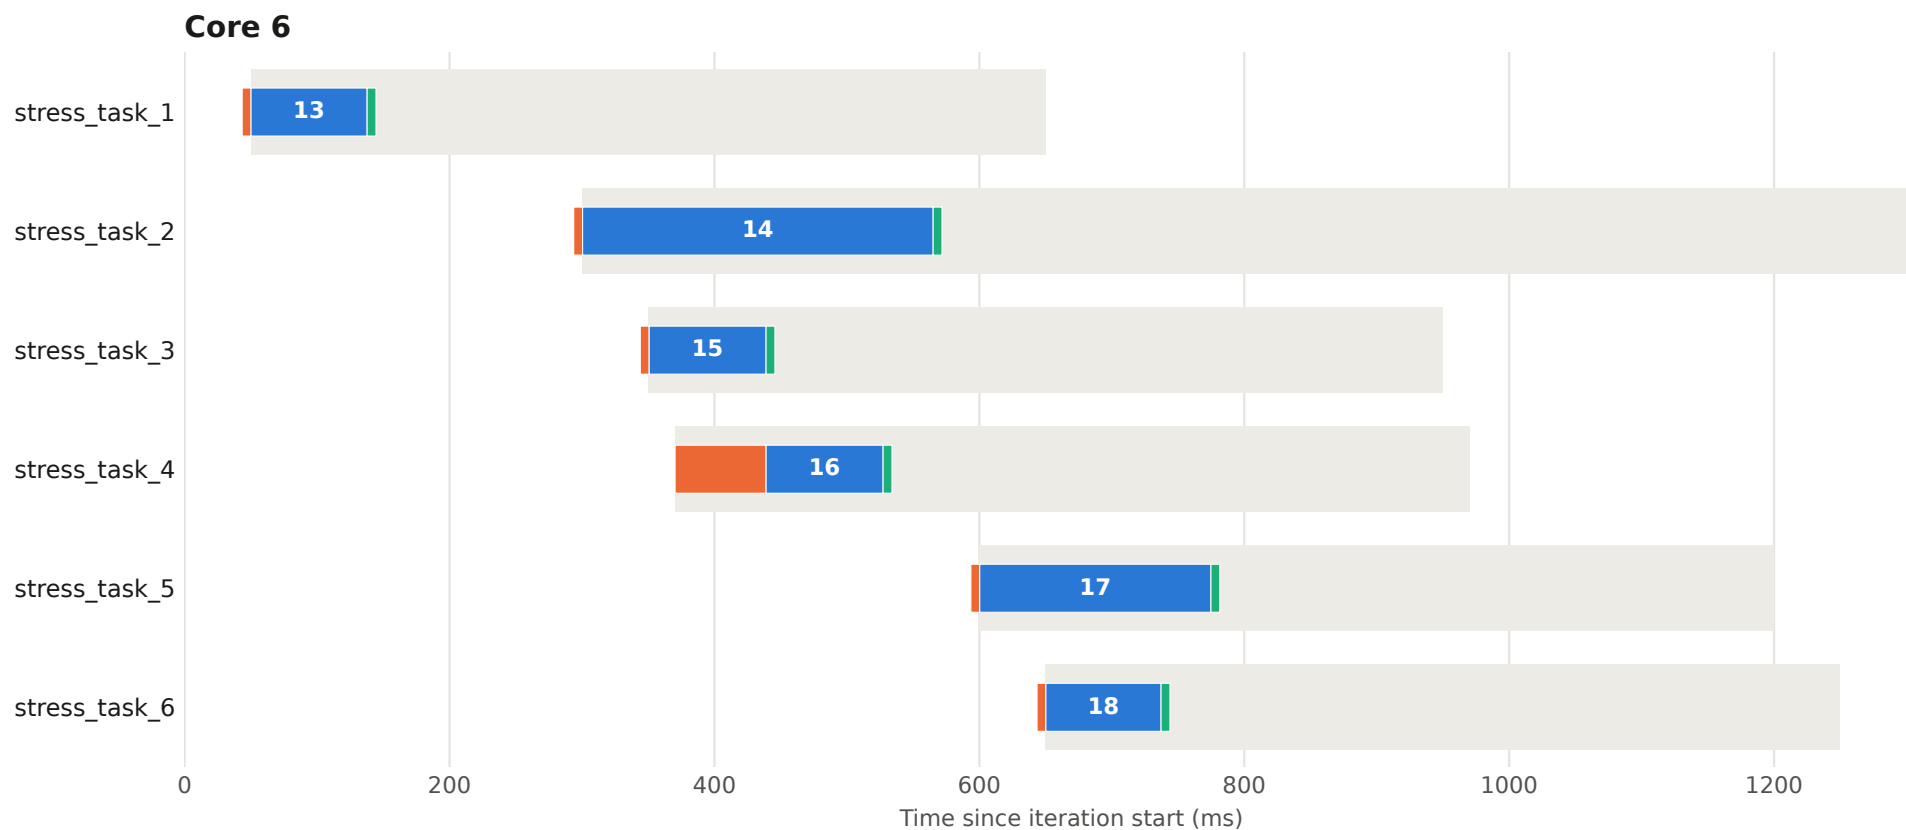


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 71 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

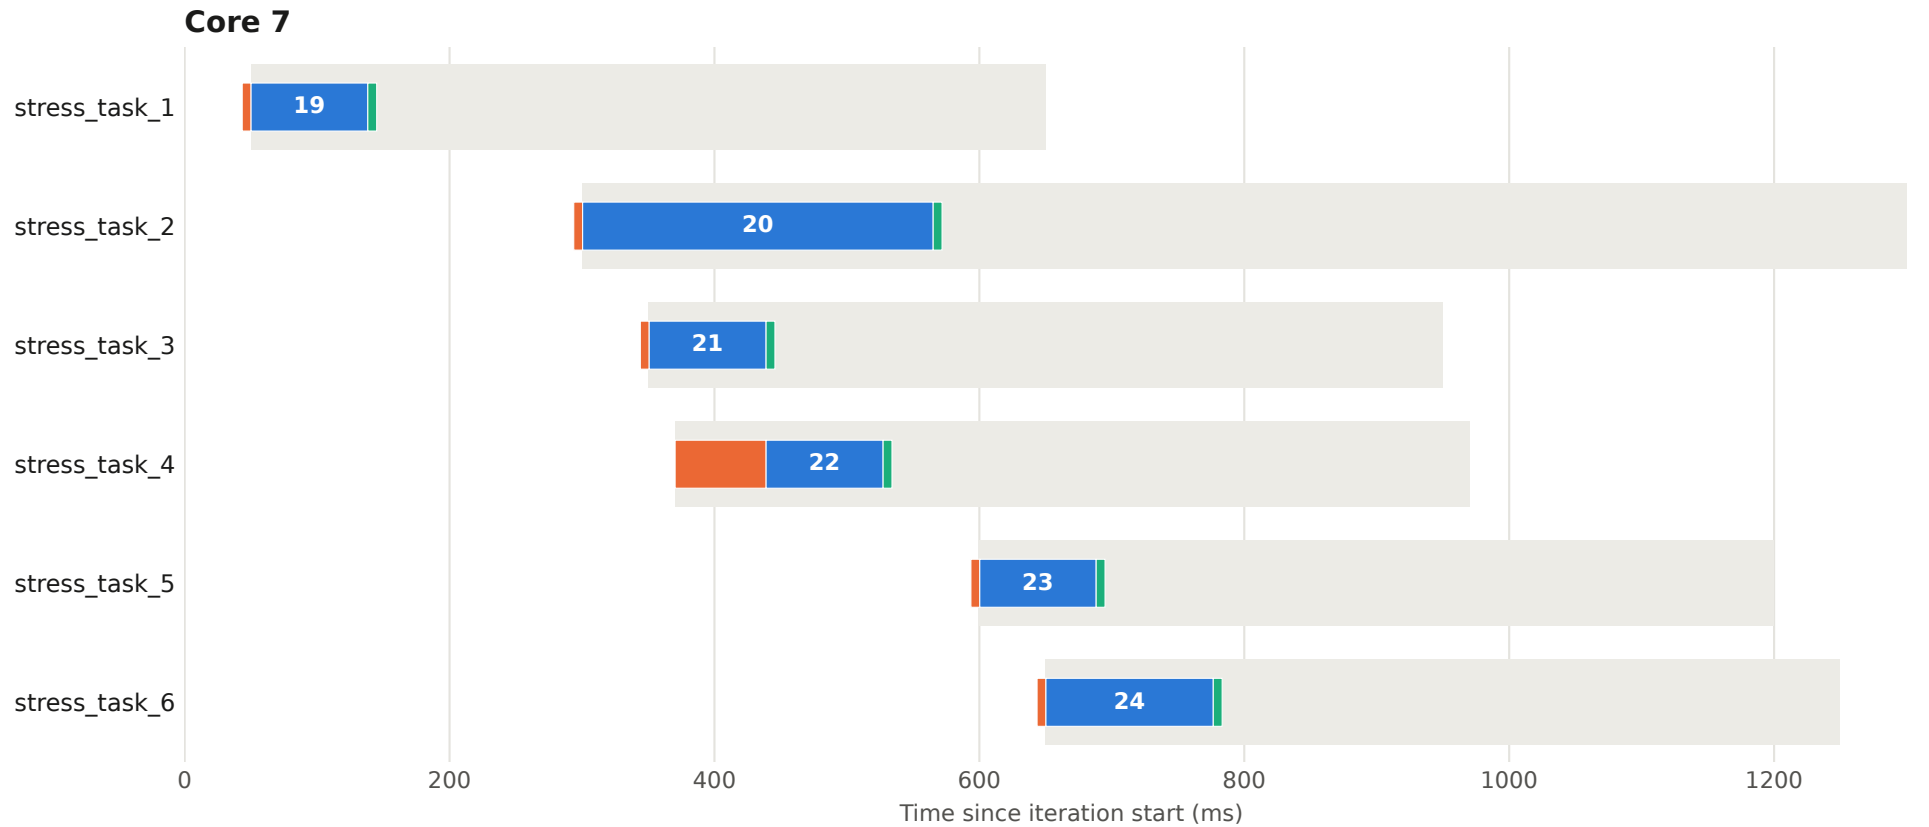


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 72 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

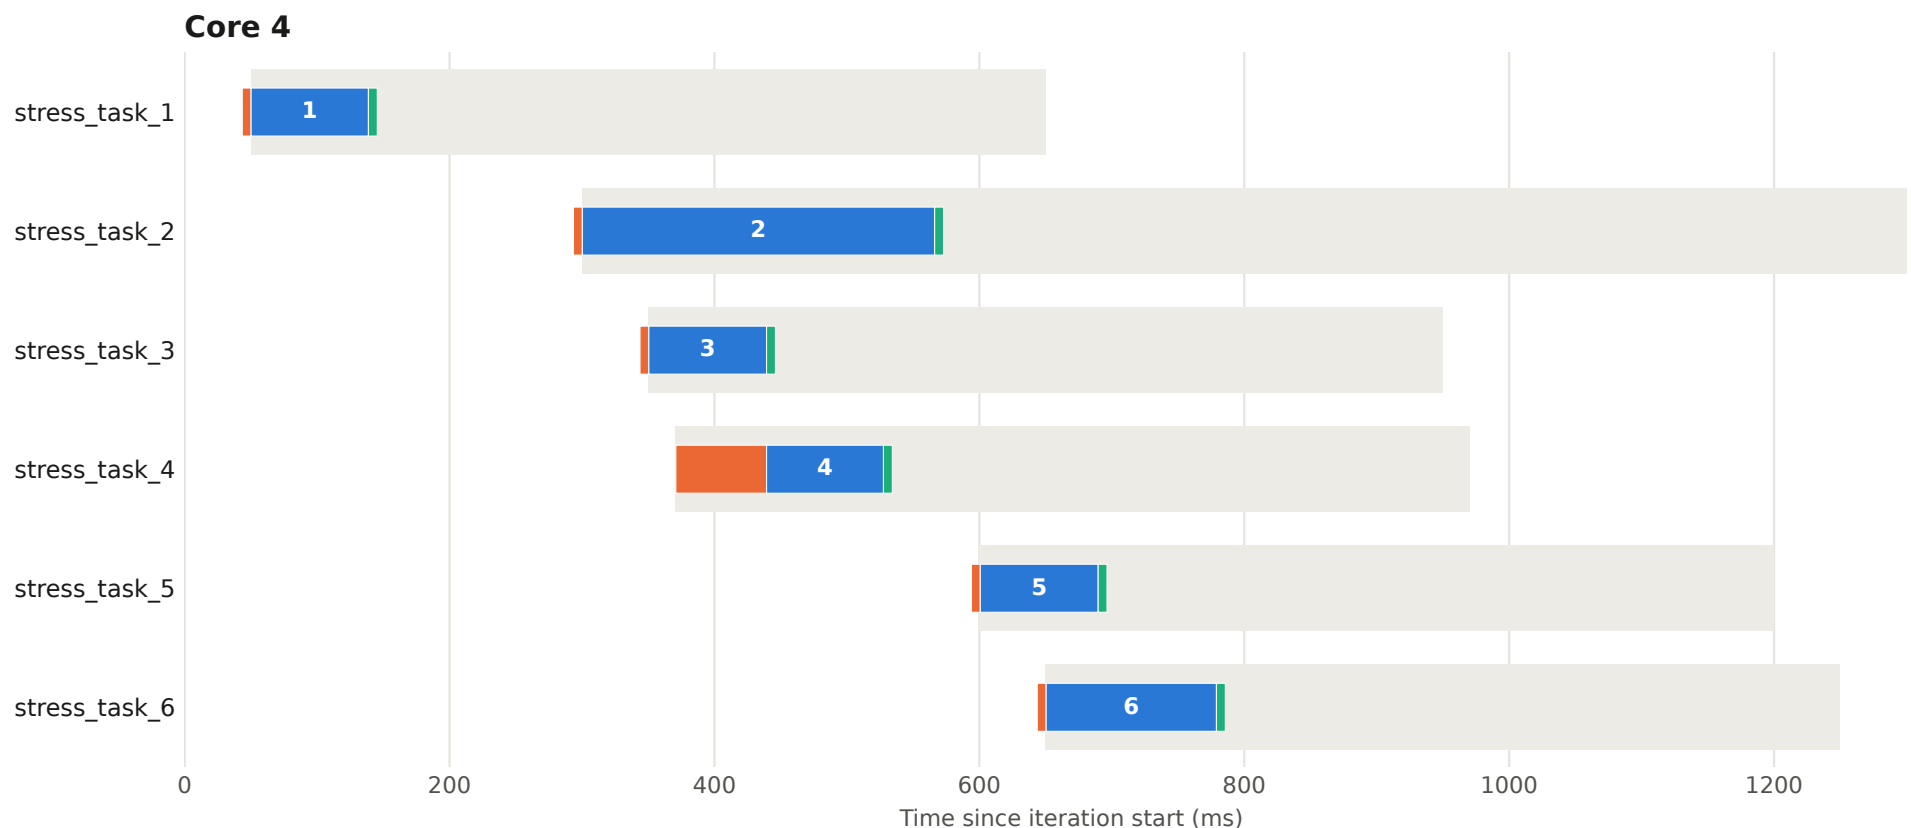


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 72 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

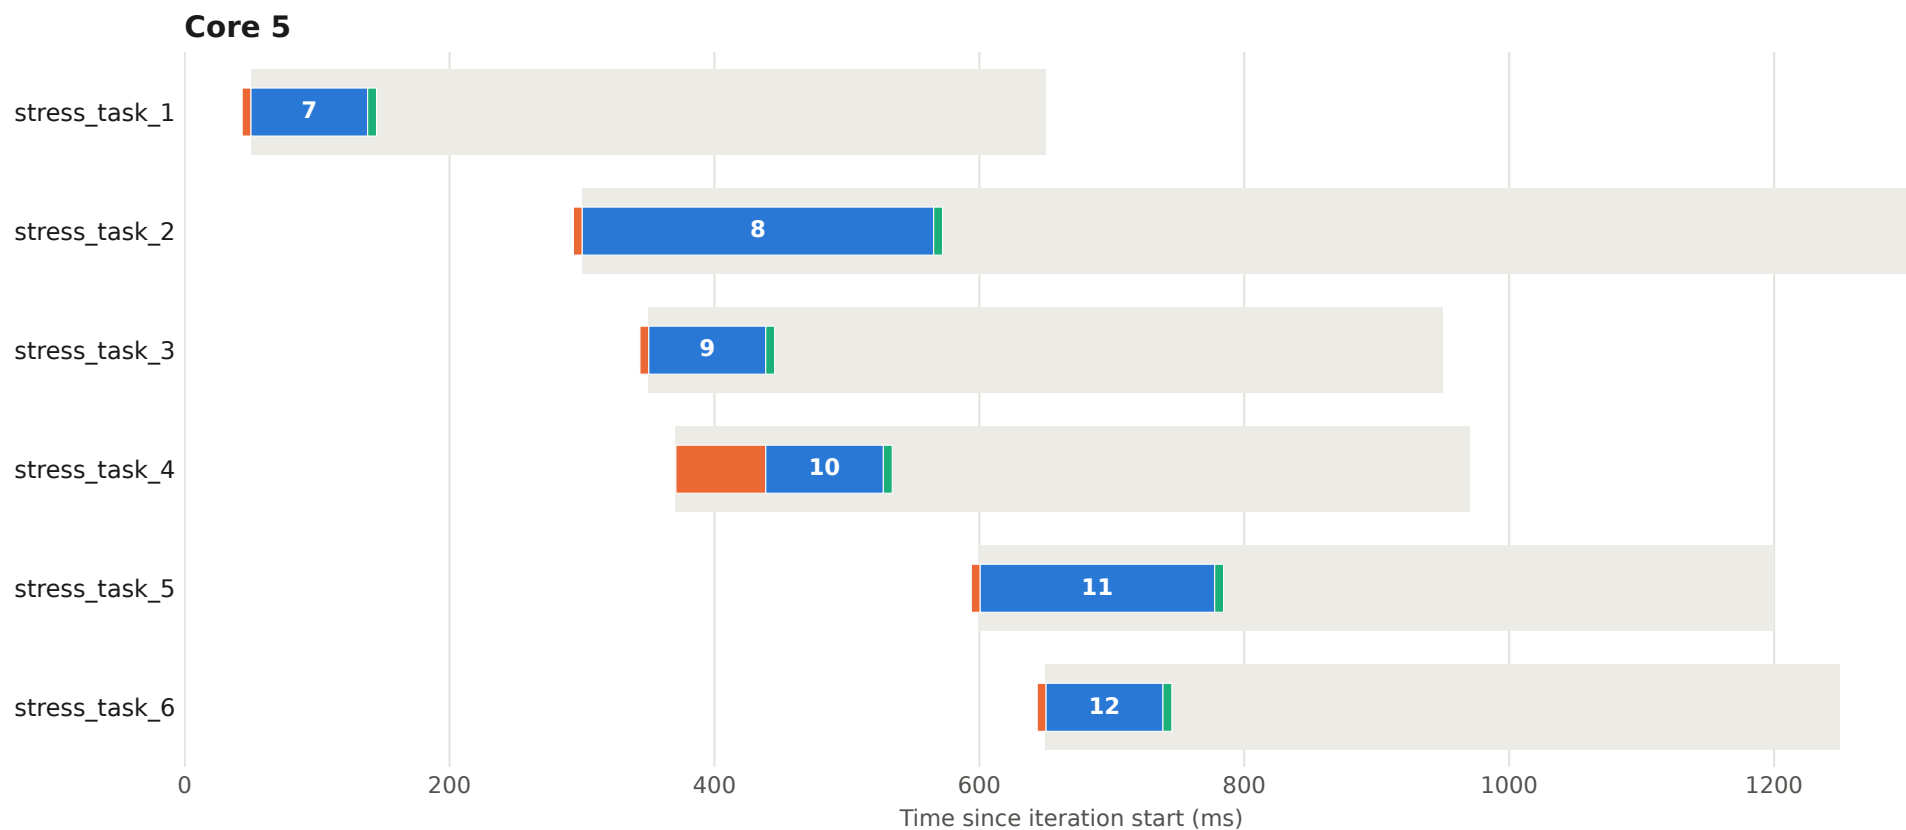


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 72 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

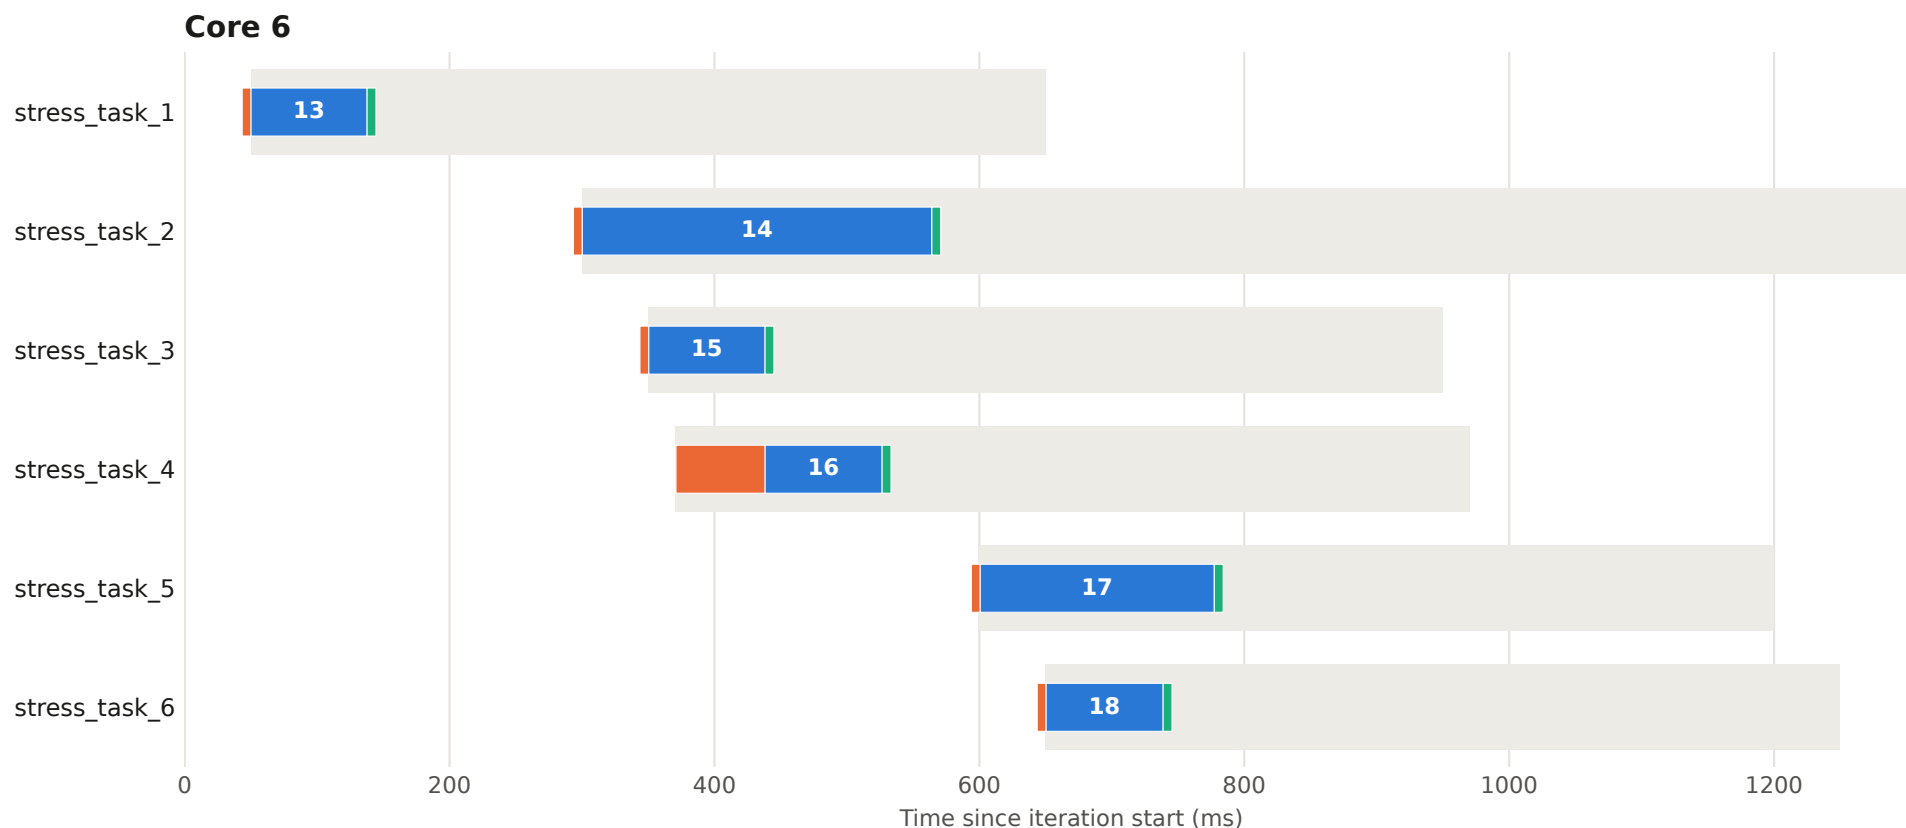


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 72 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

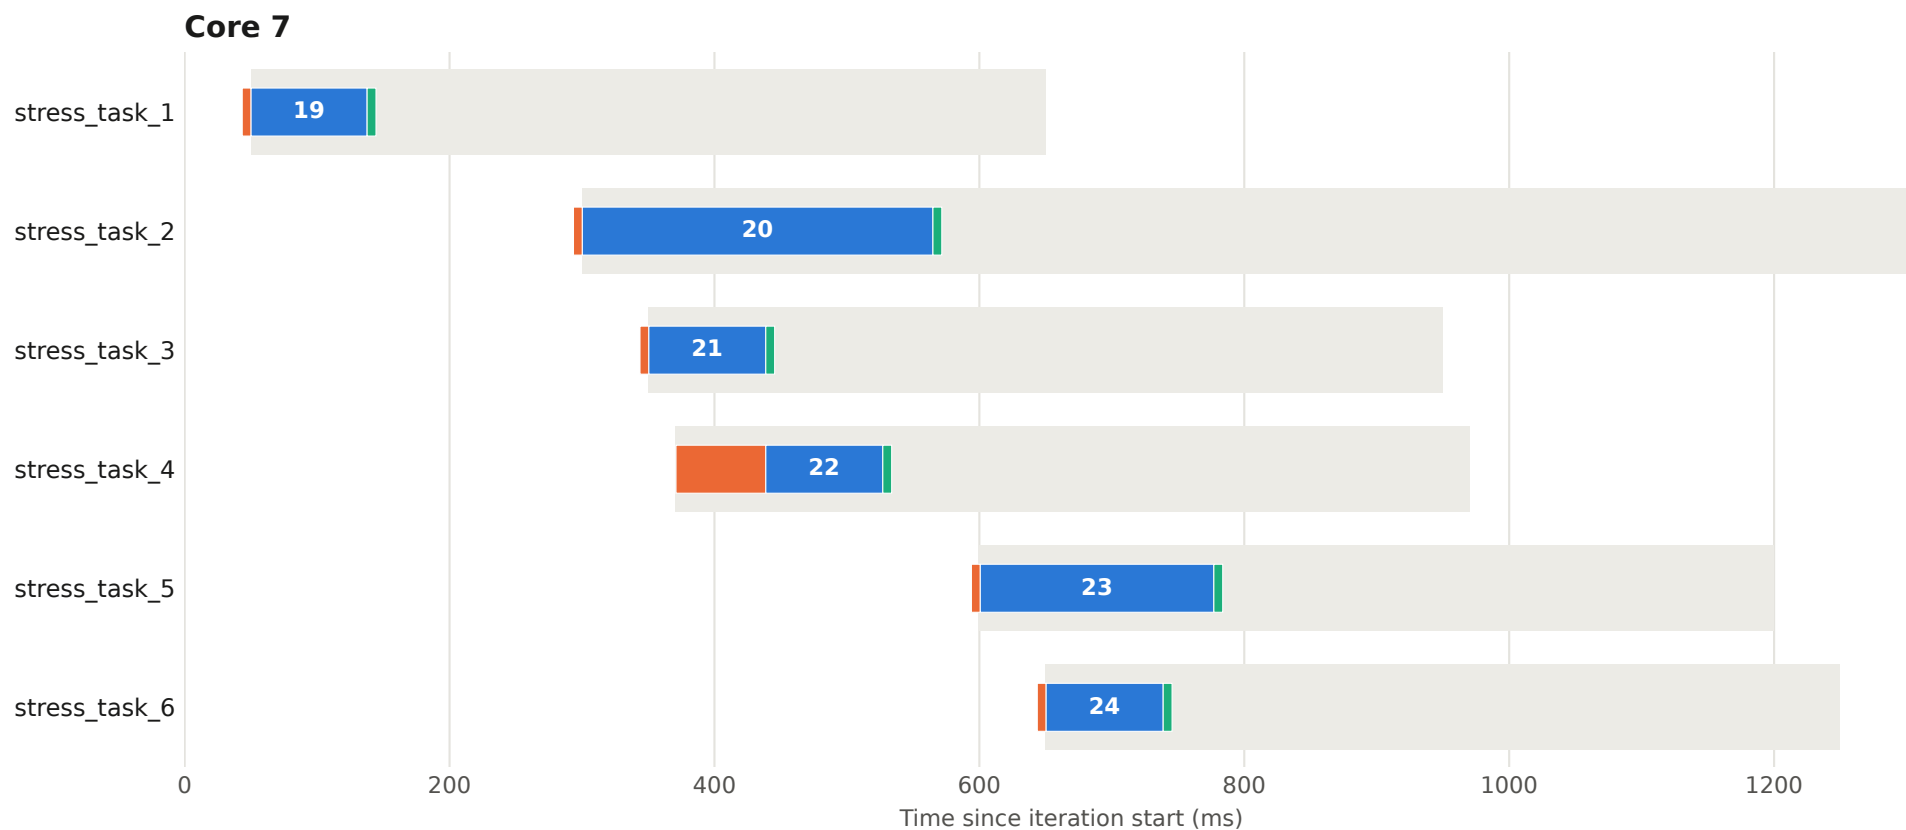


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 73 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

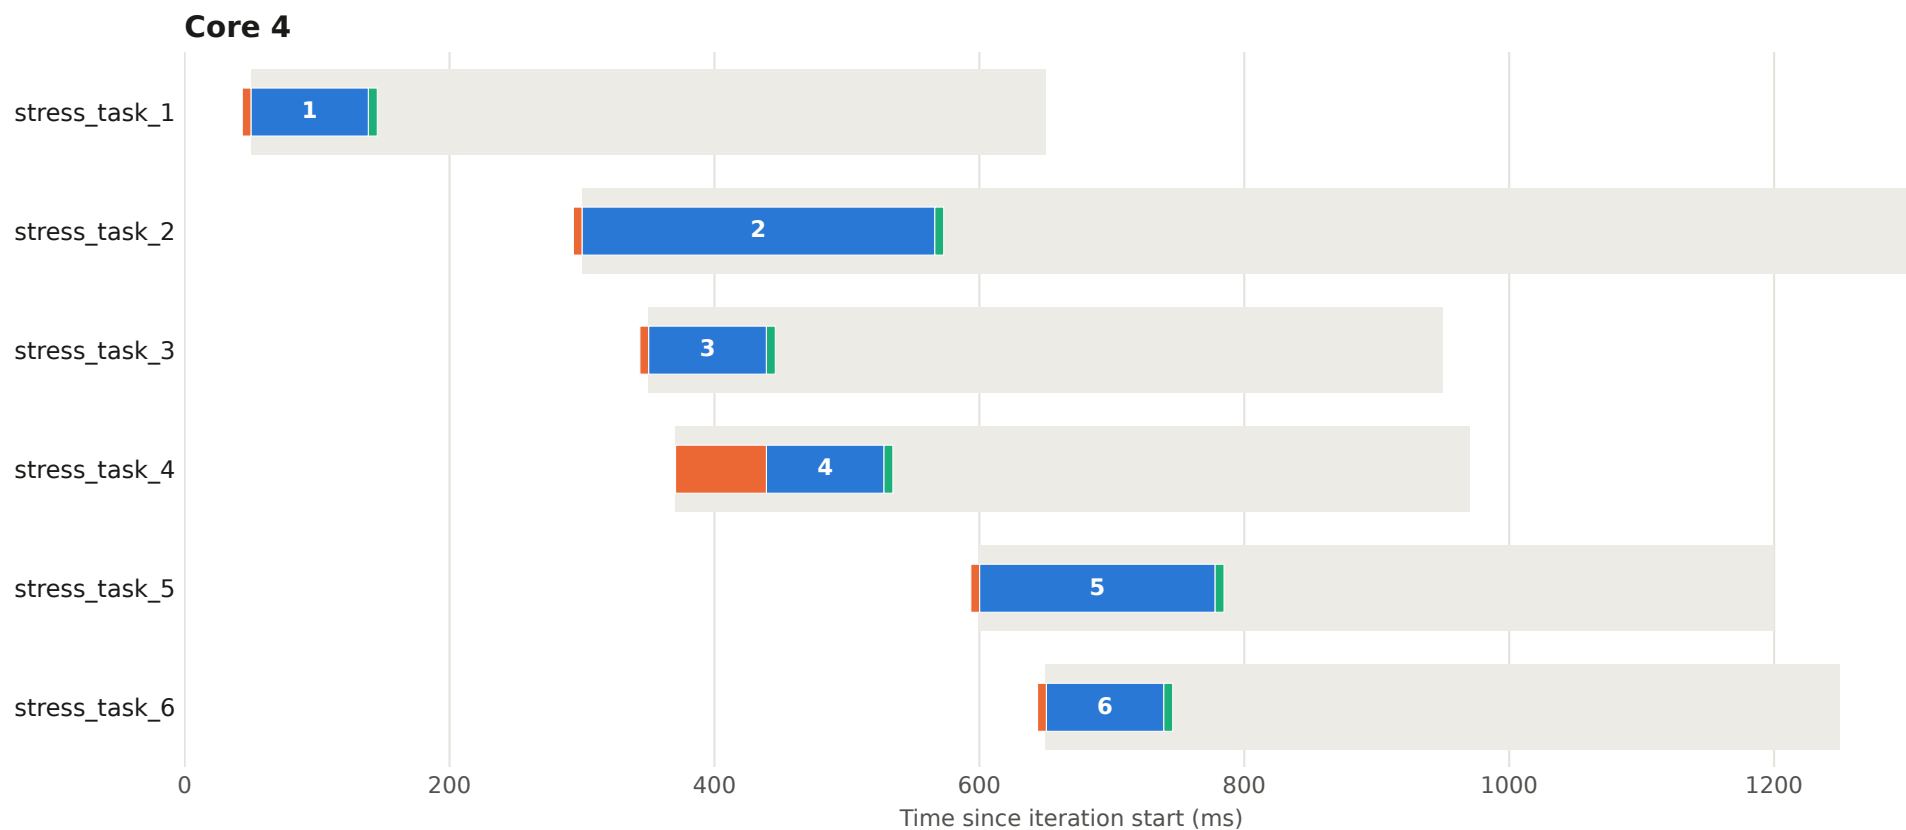


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 73 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

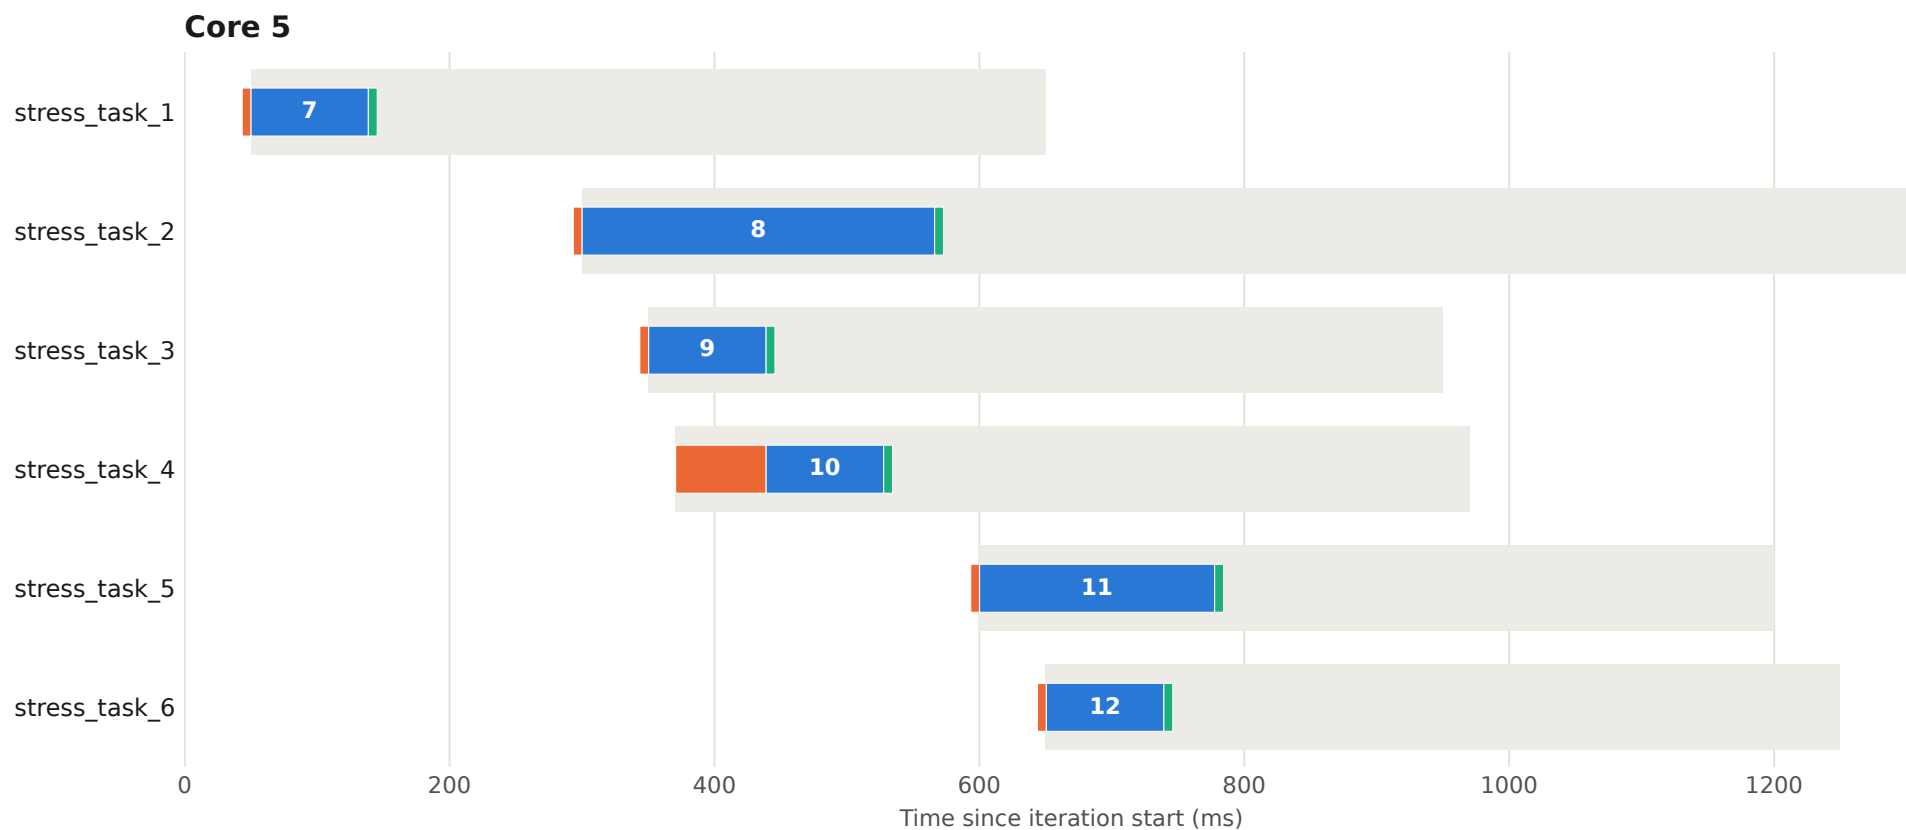


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 73 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

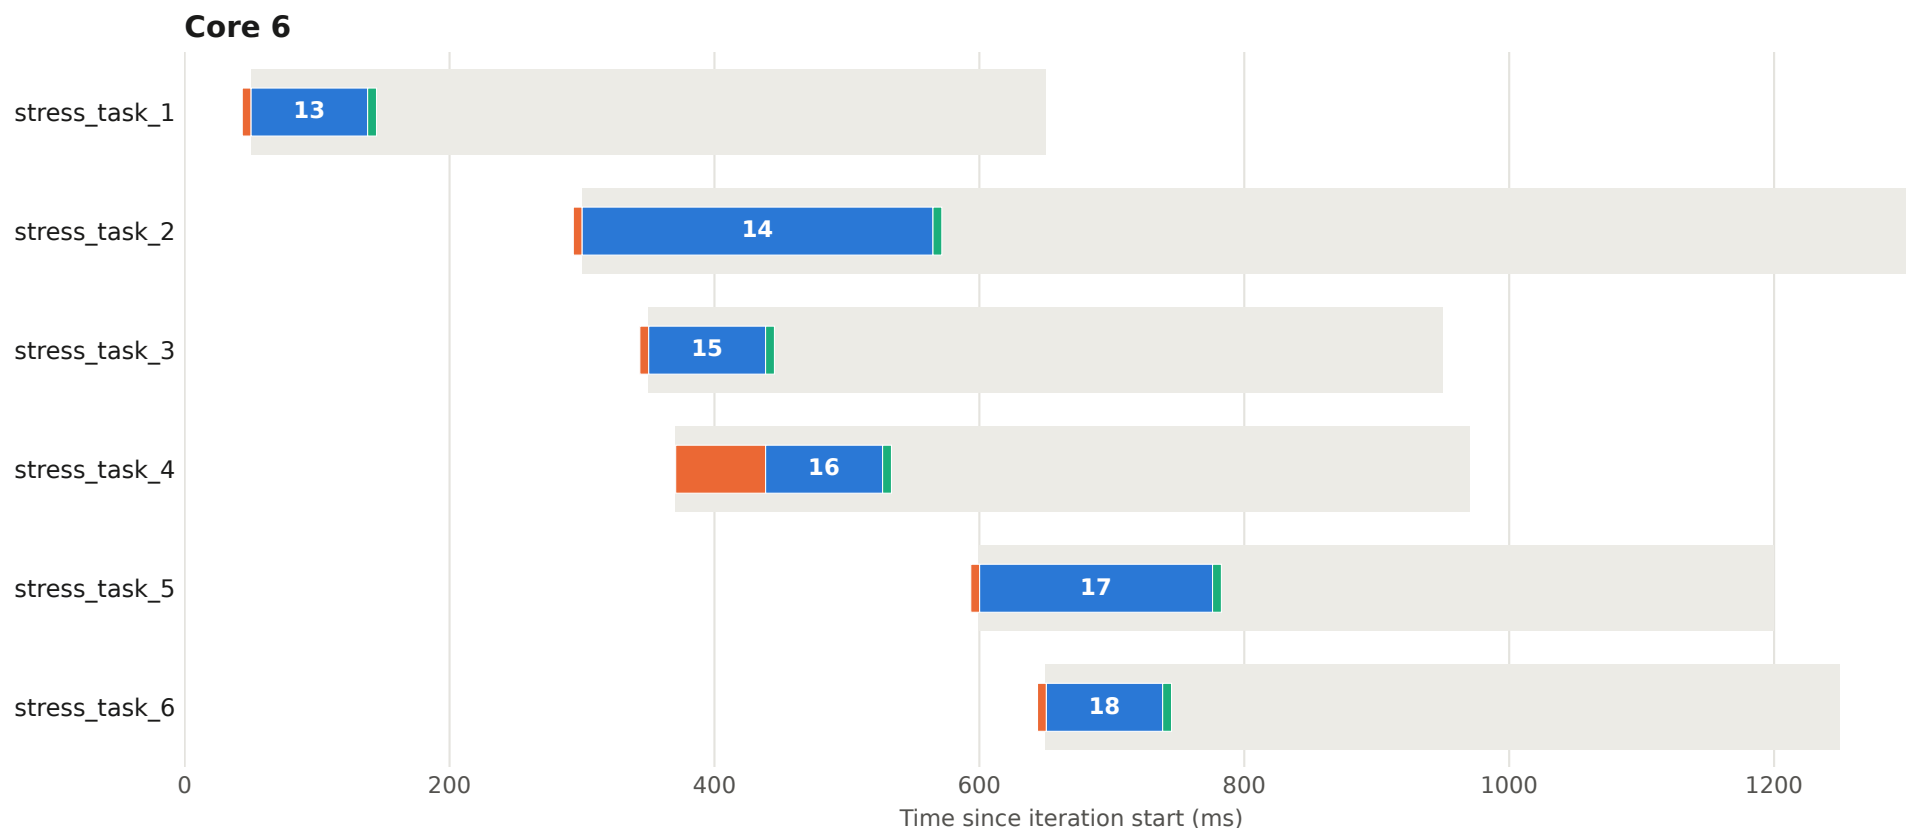


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 73 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

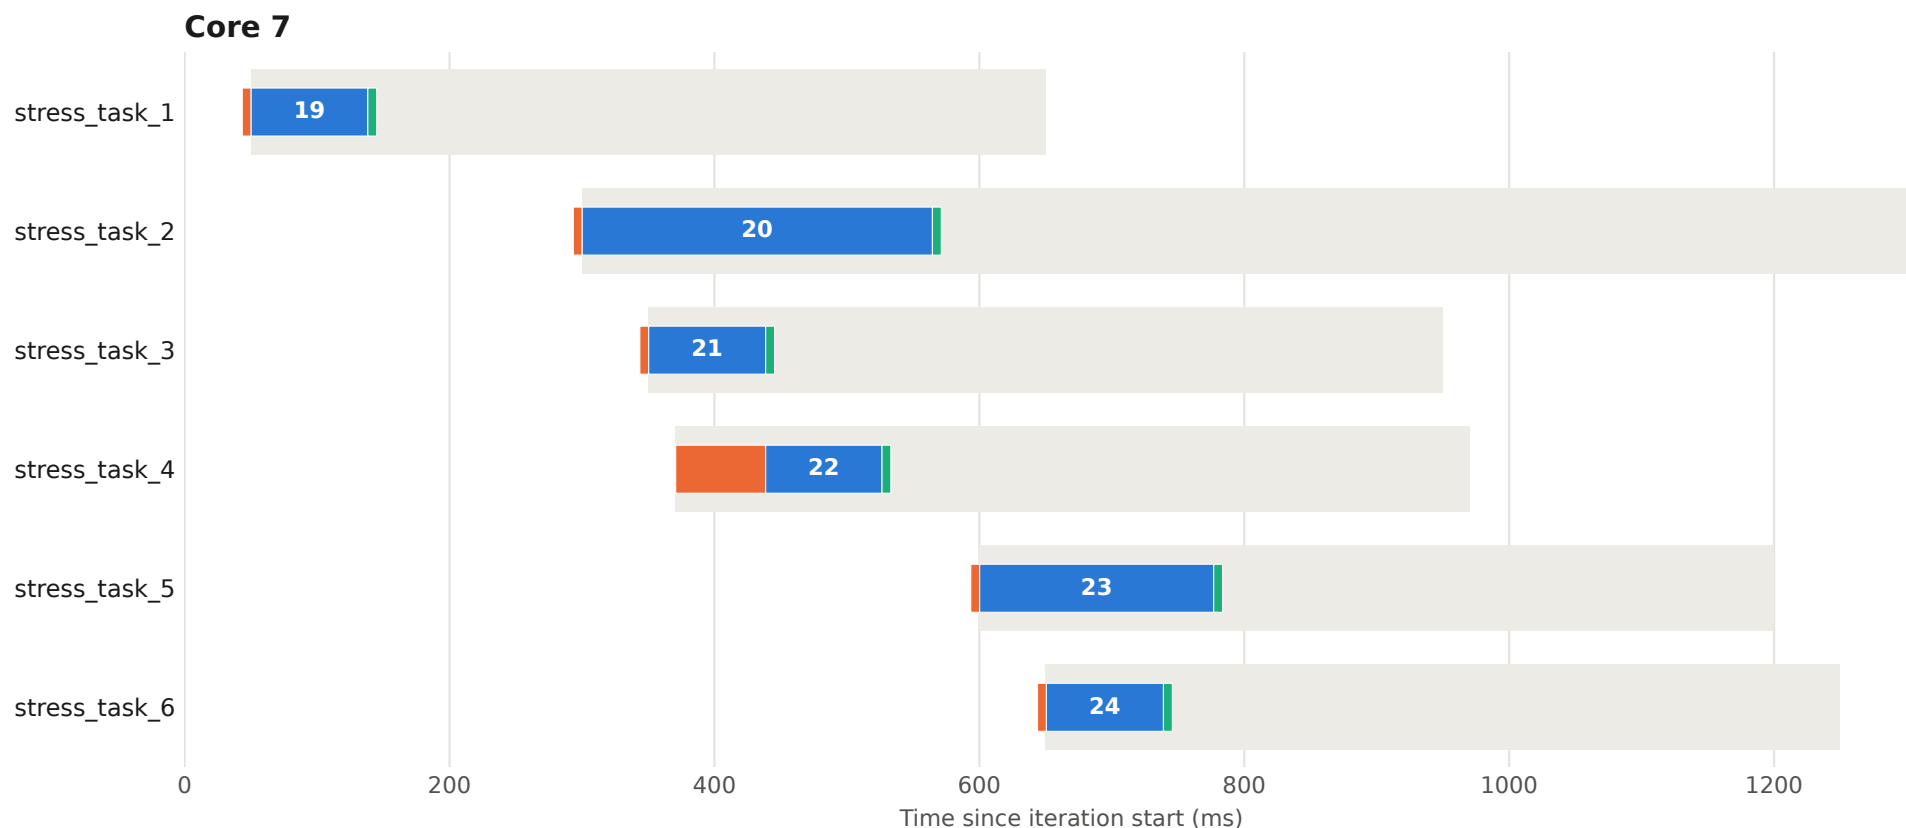


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 74 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

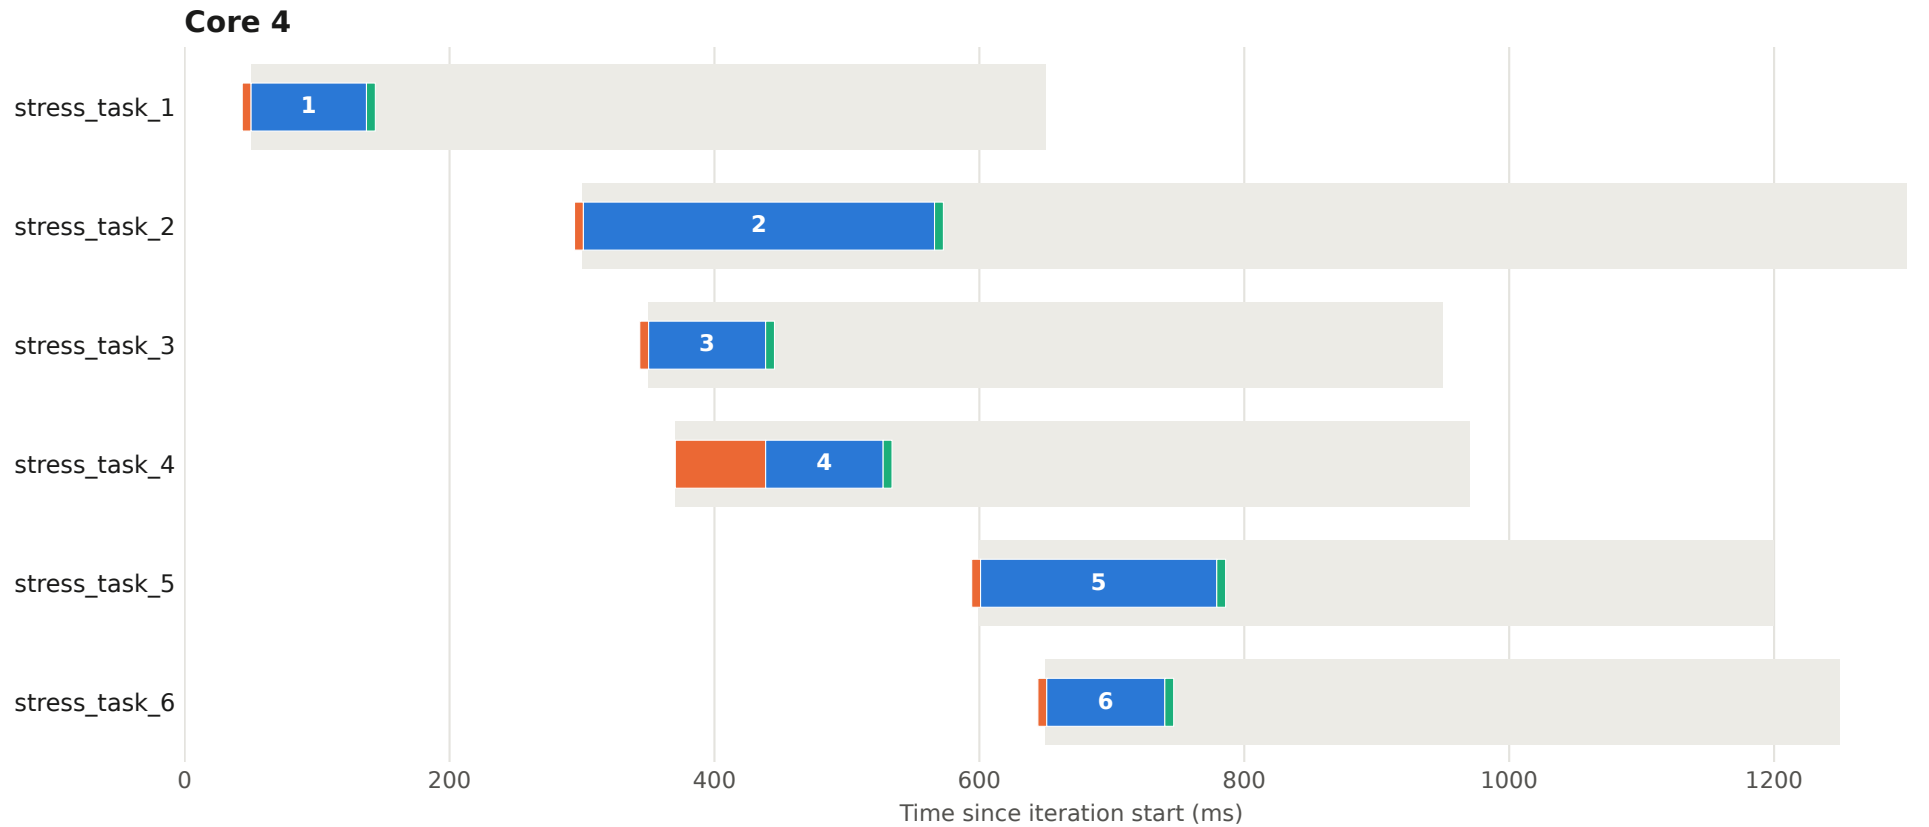


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 74 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

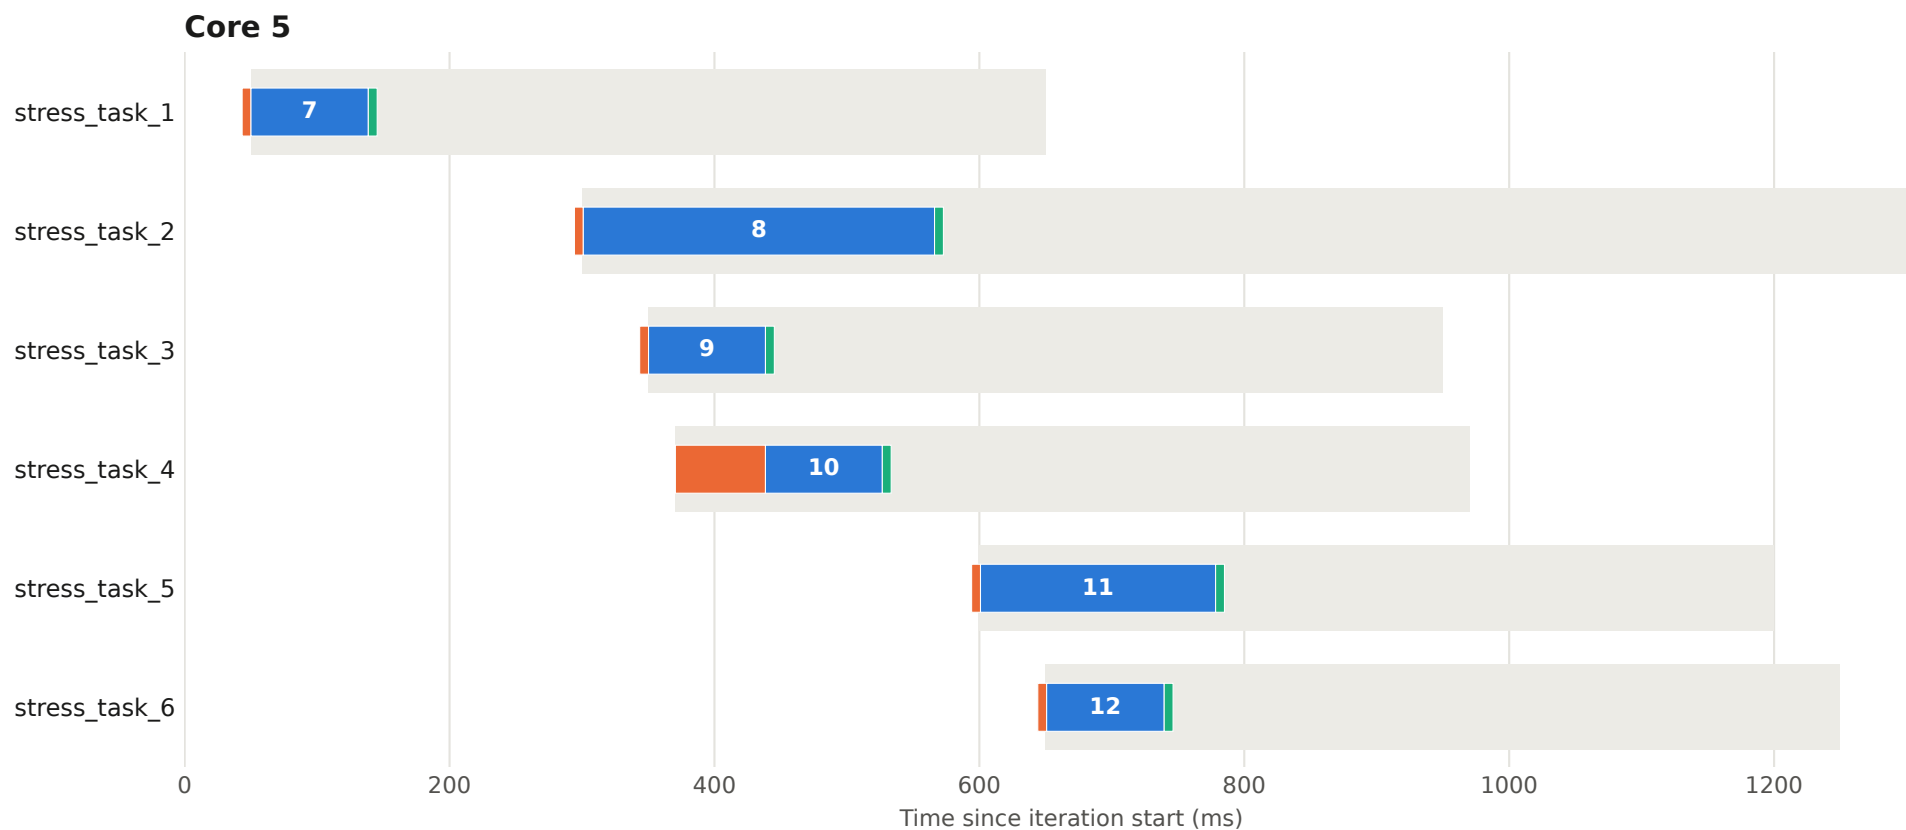


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 74 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

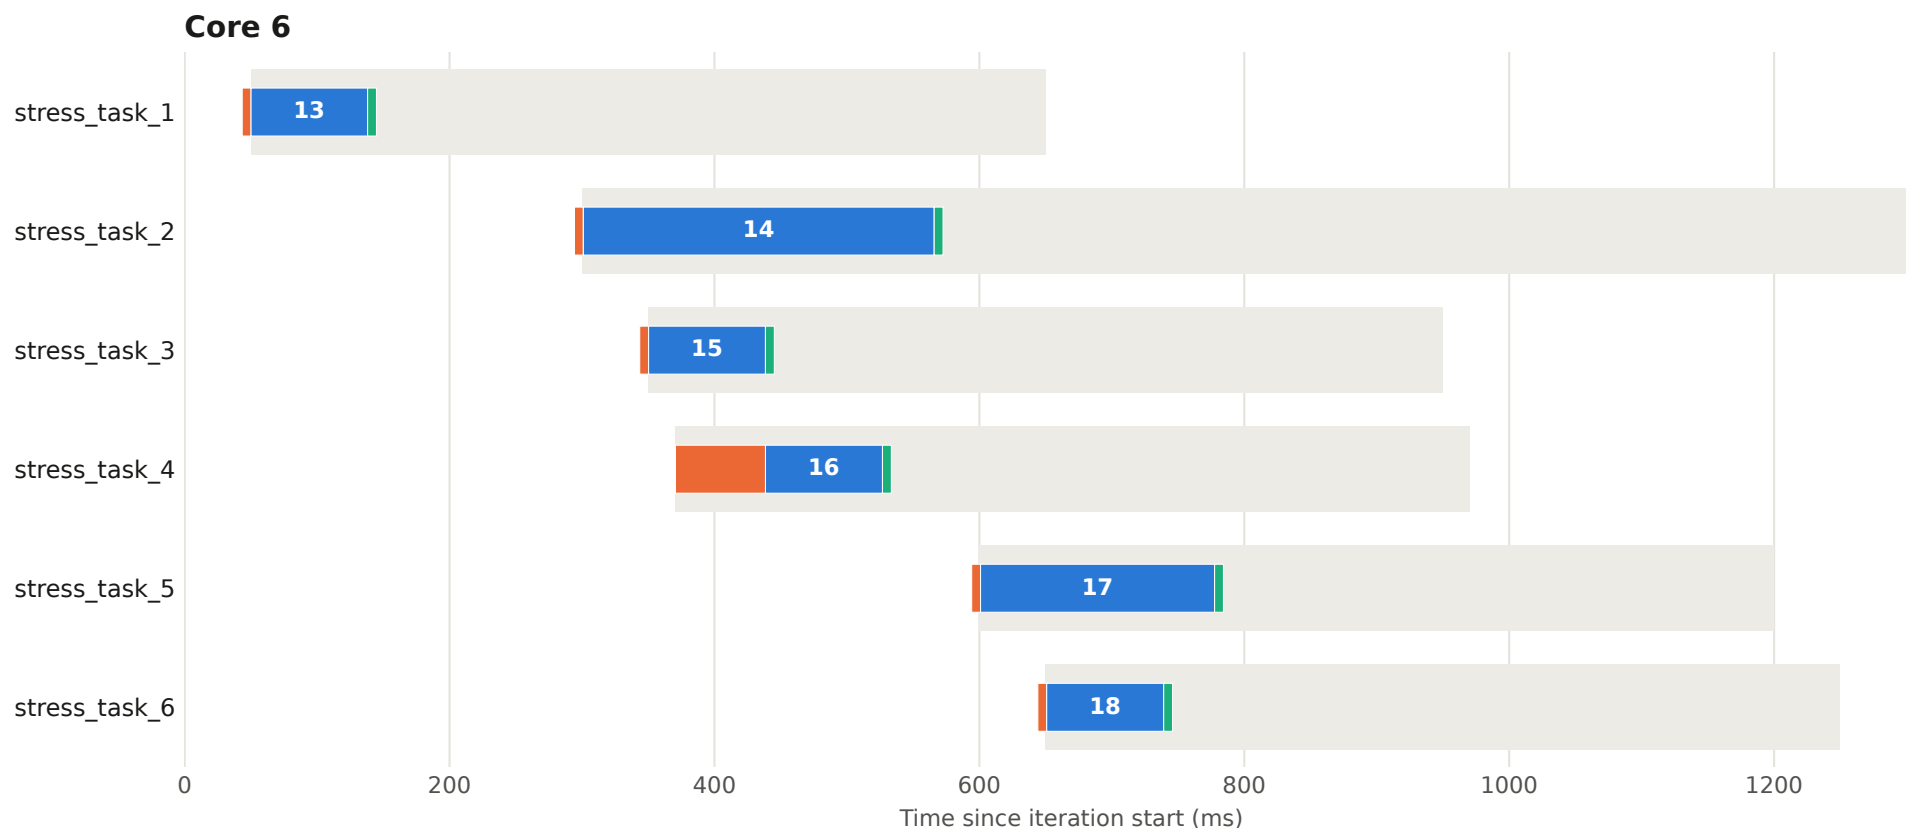


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 74 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

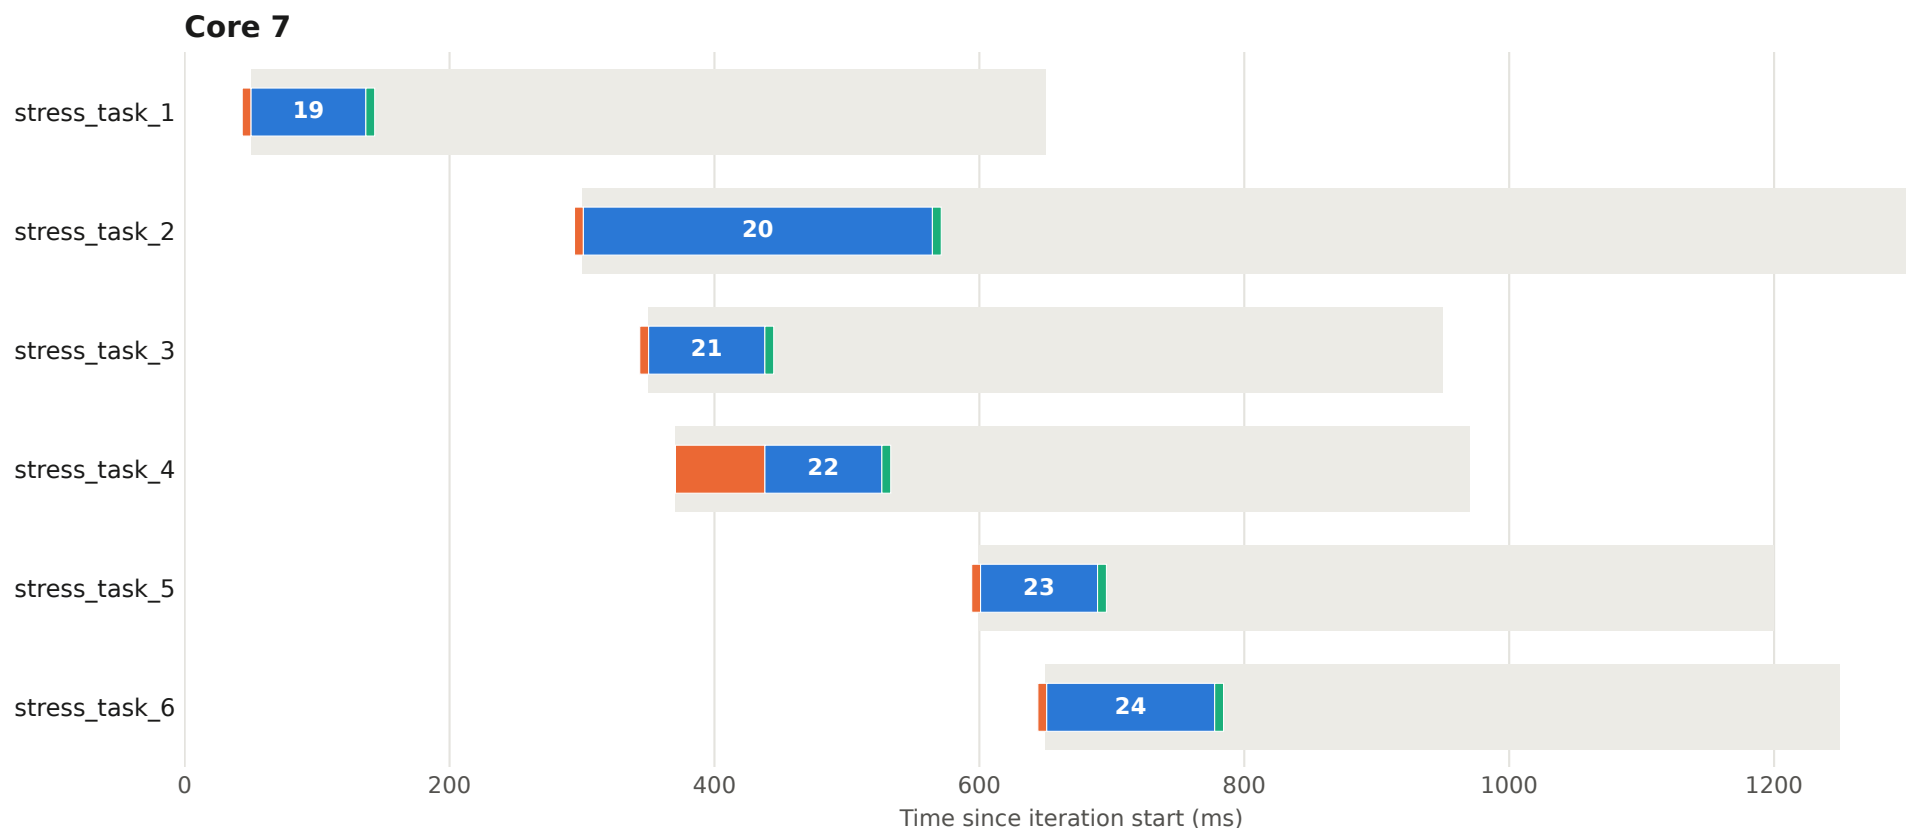


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 75 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

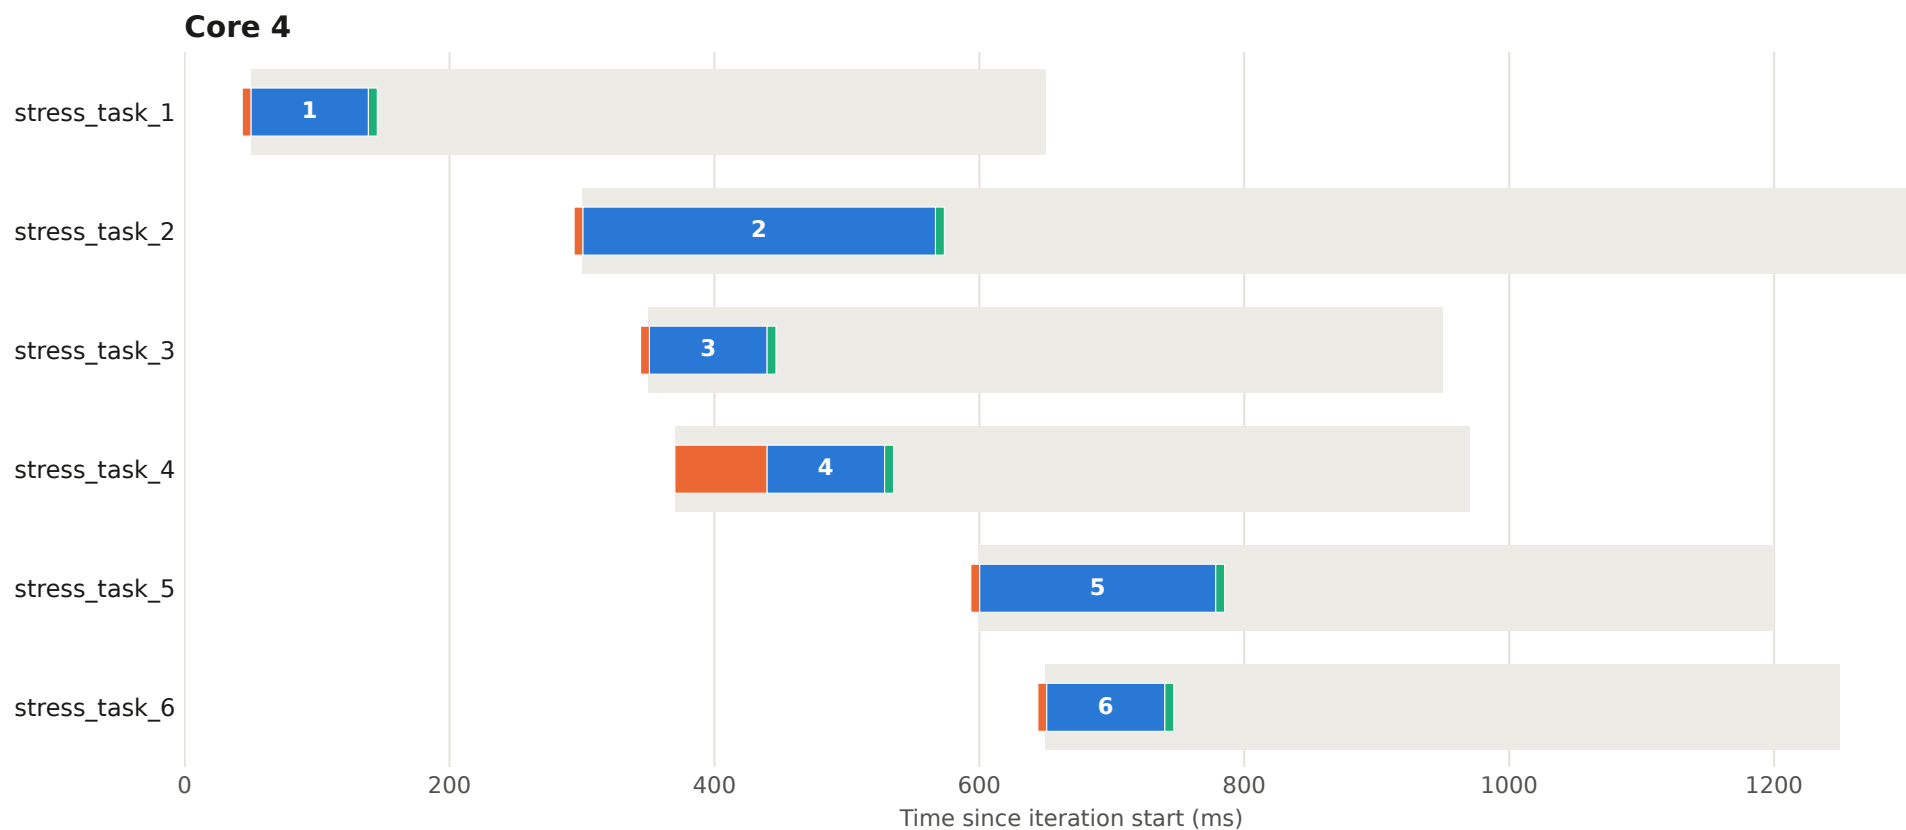


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 75 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

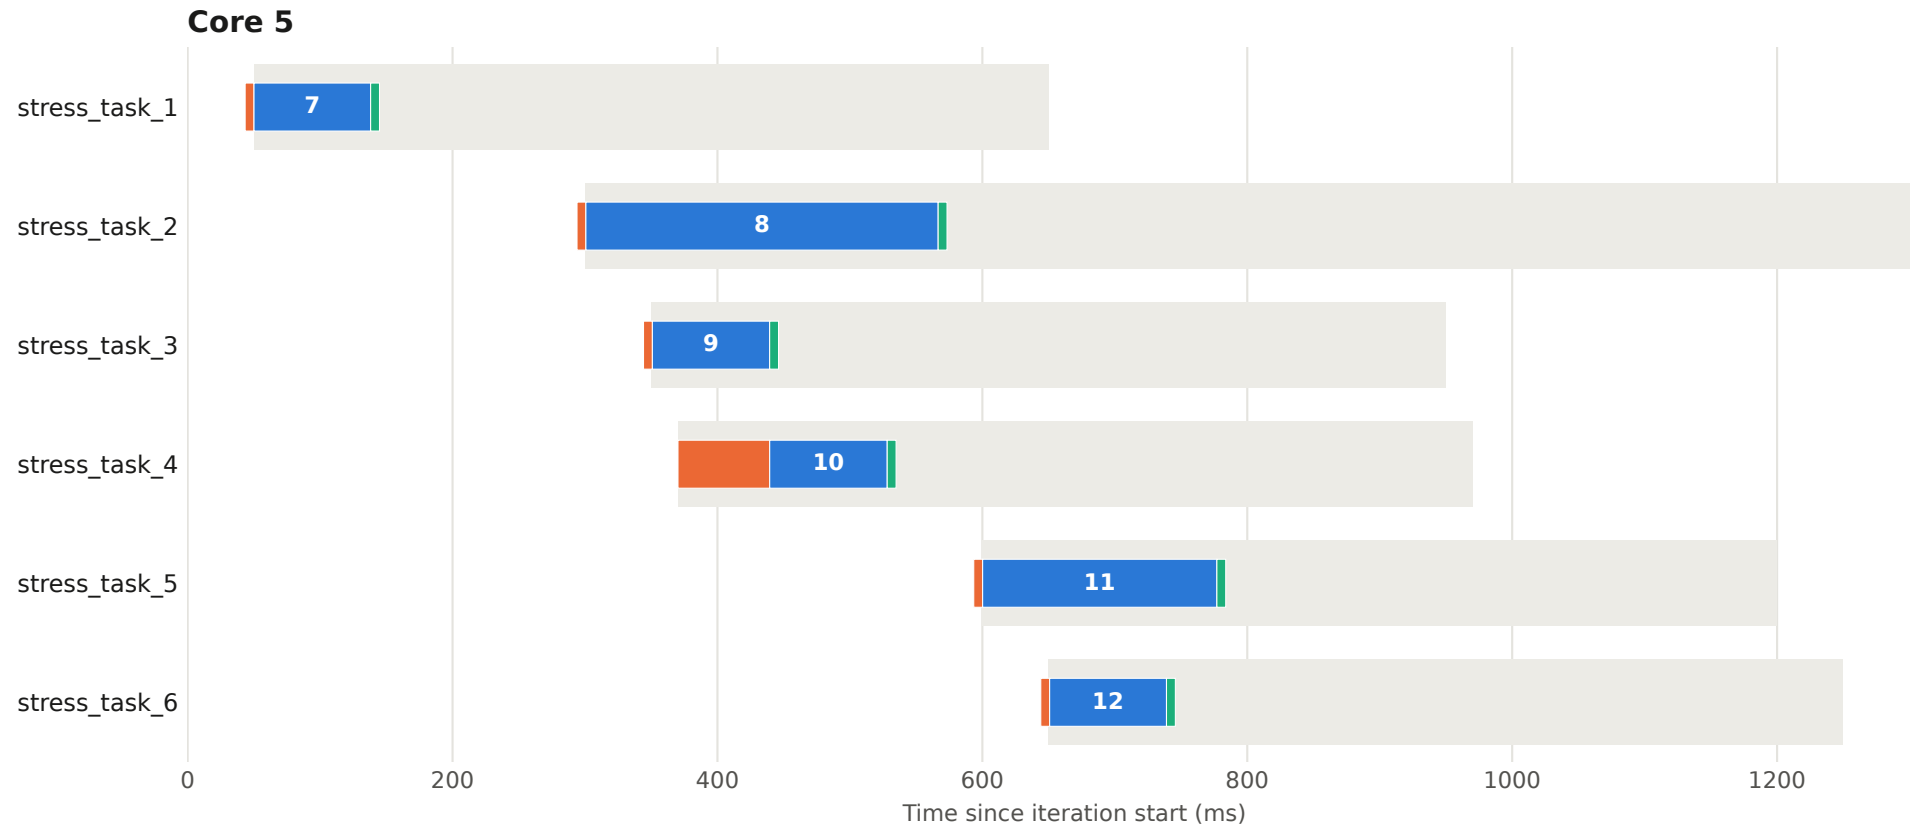


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 75 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

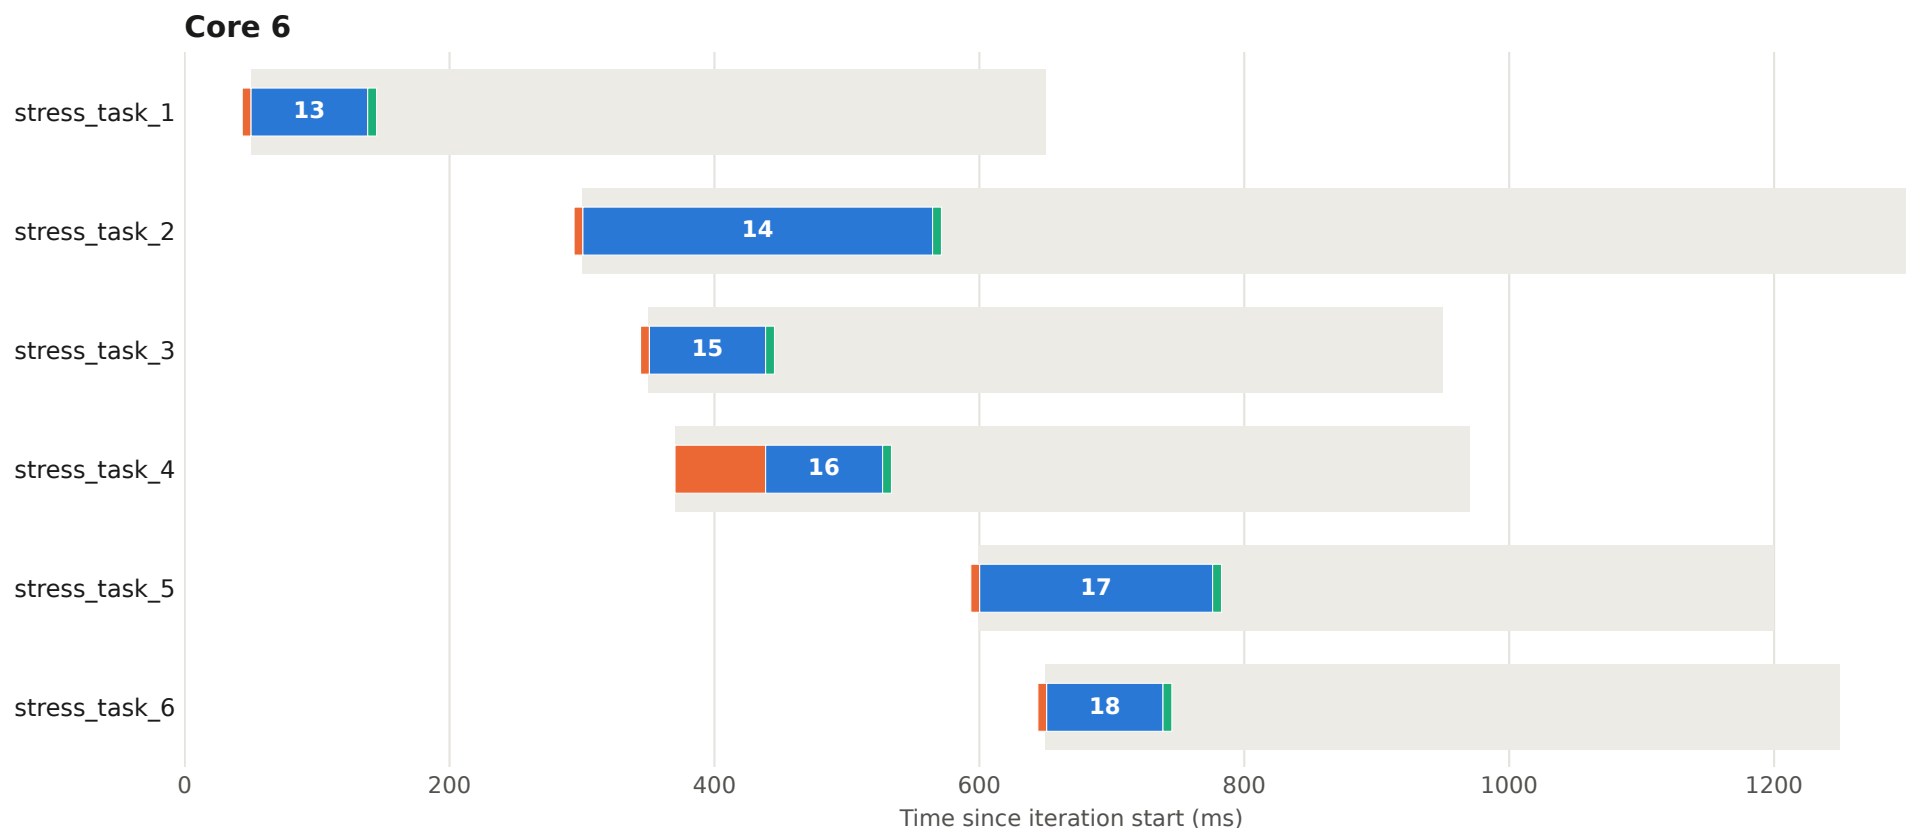


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 75 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

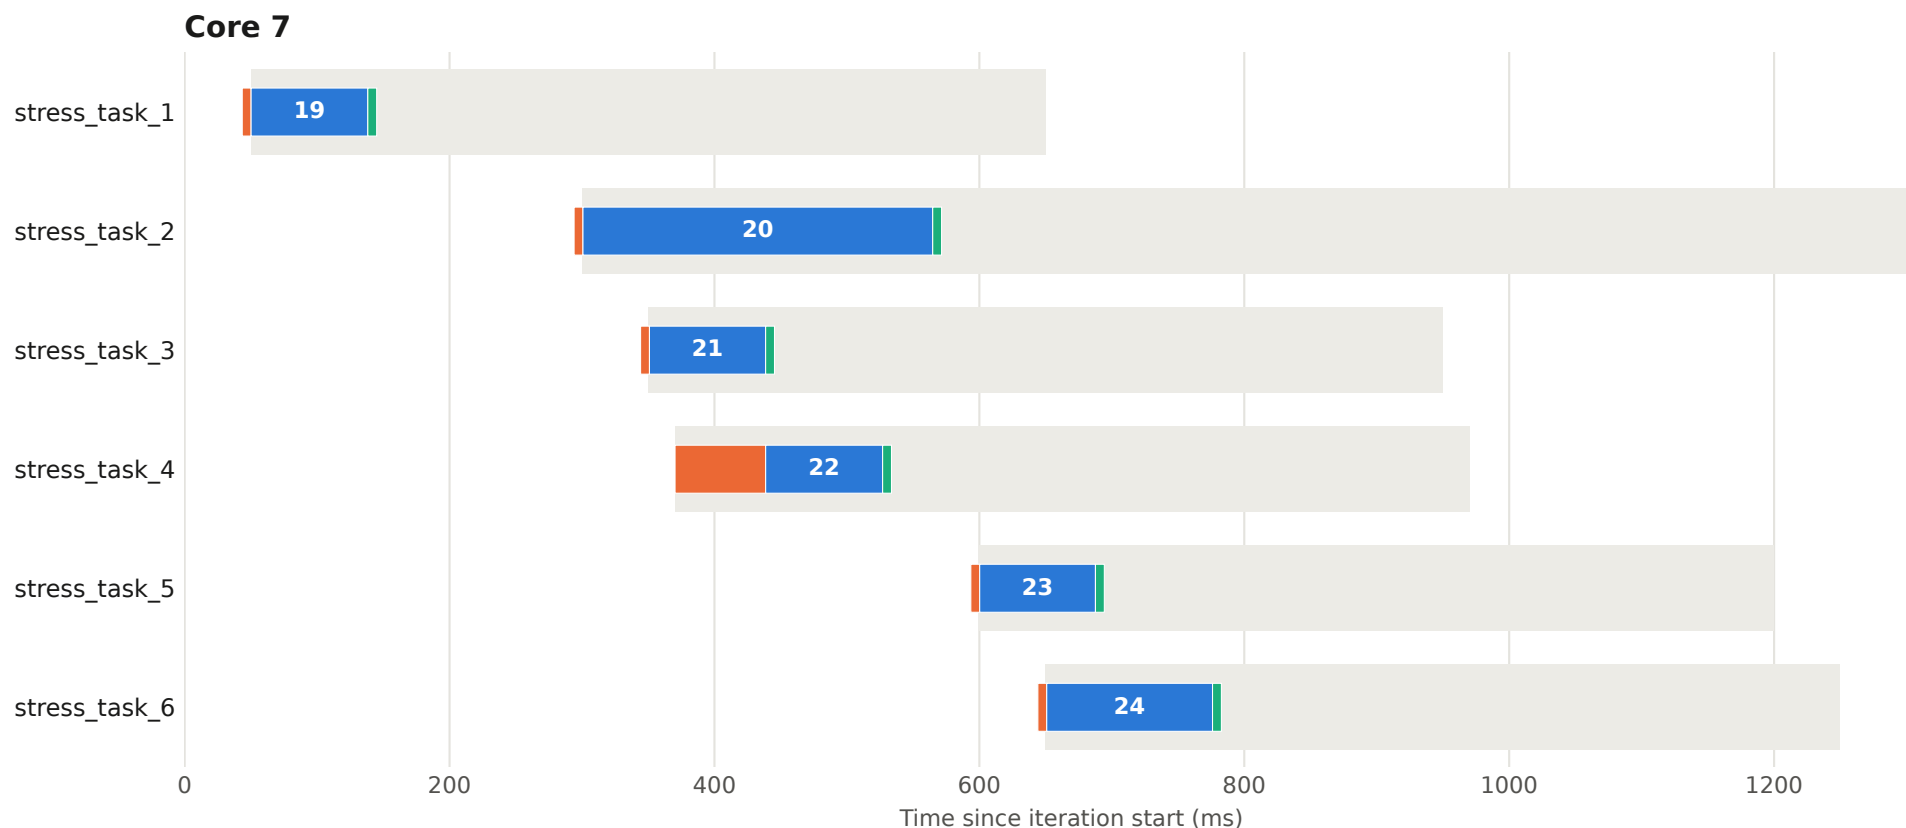


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 76 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

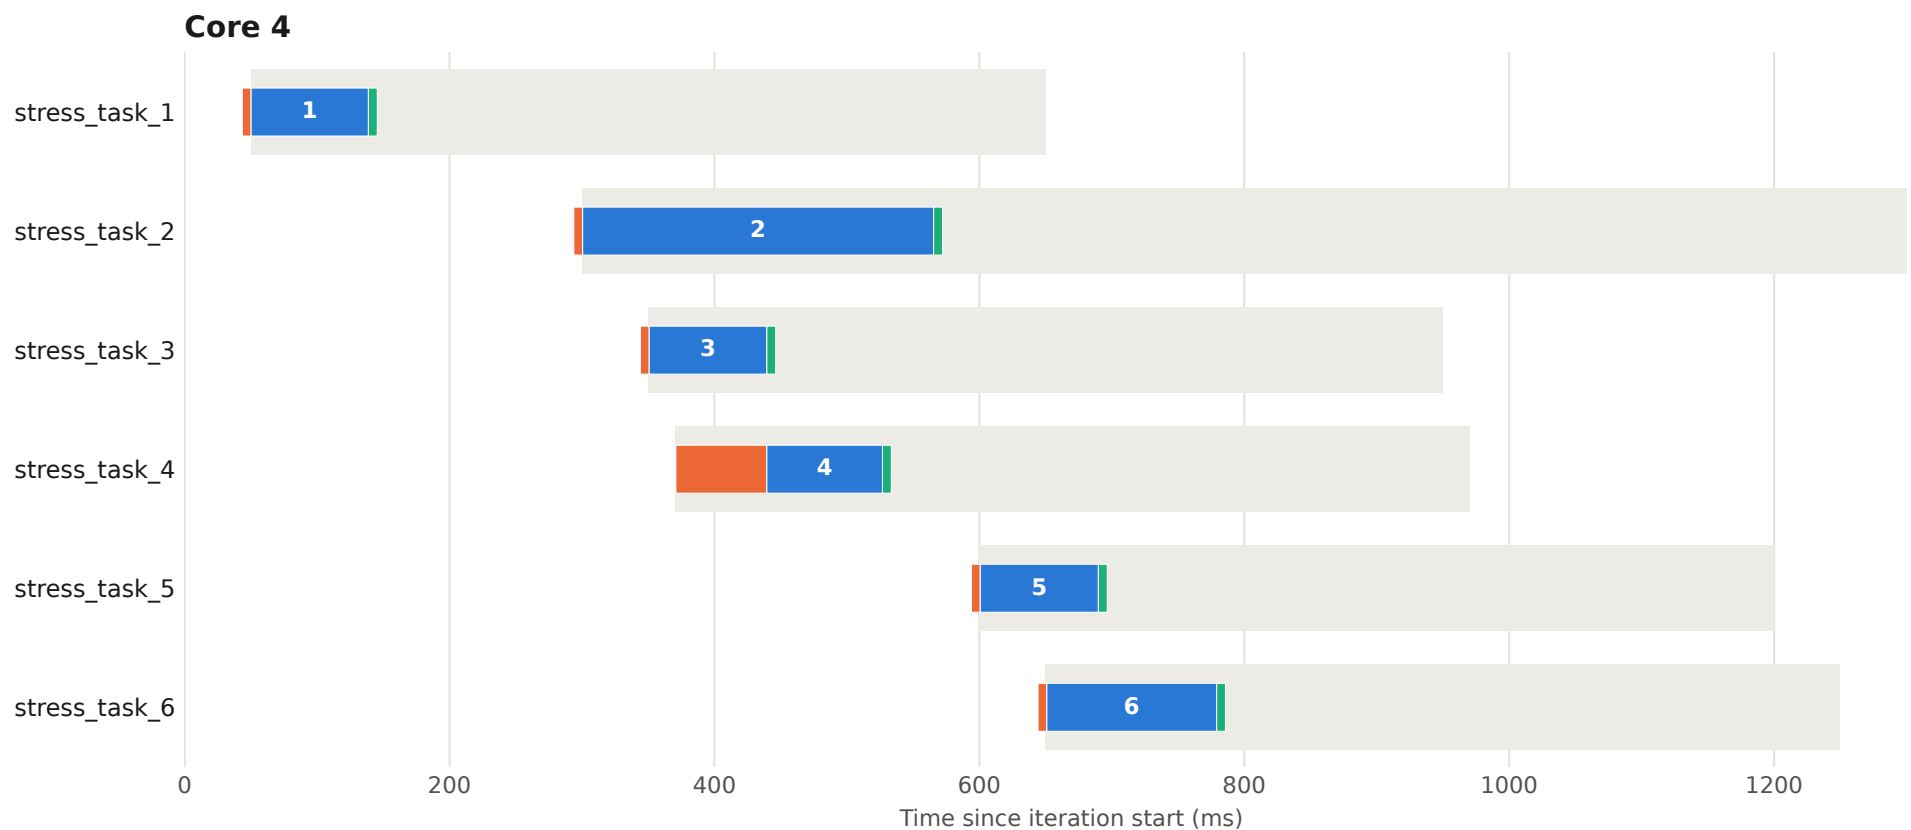


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 76 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

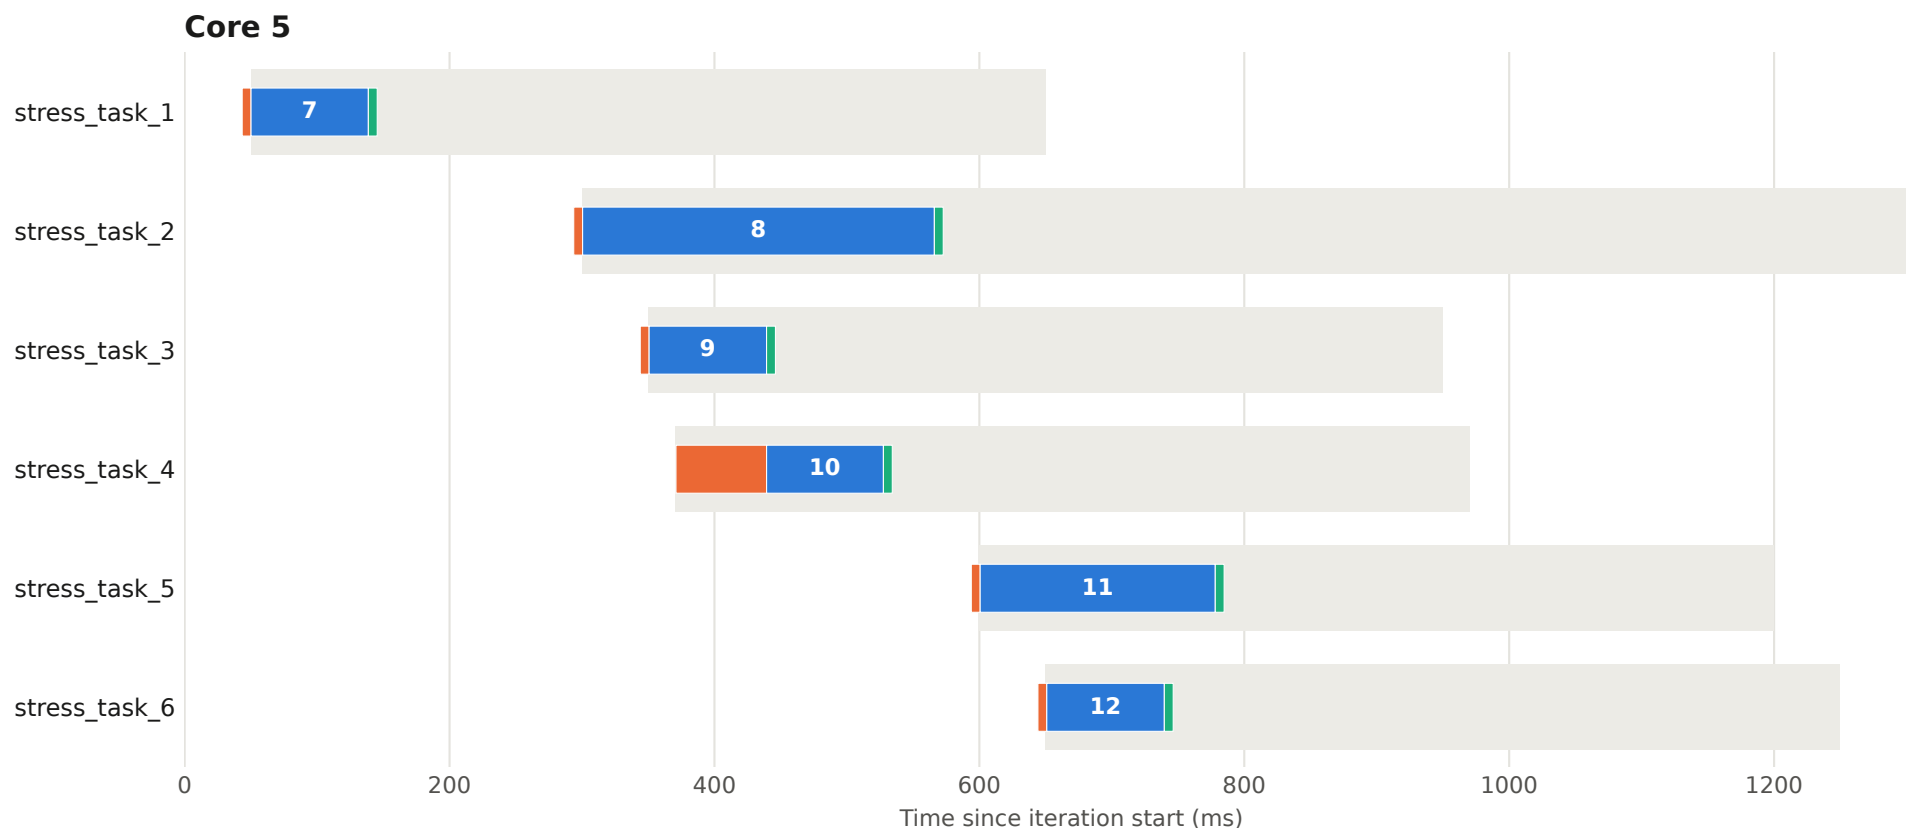


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 76 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

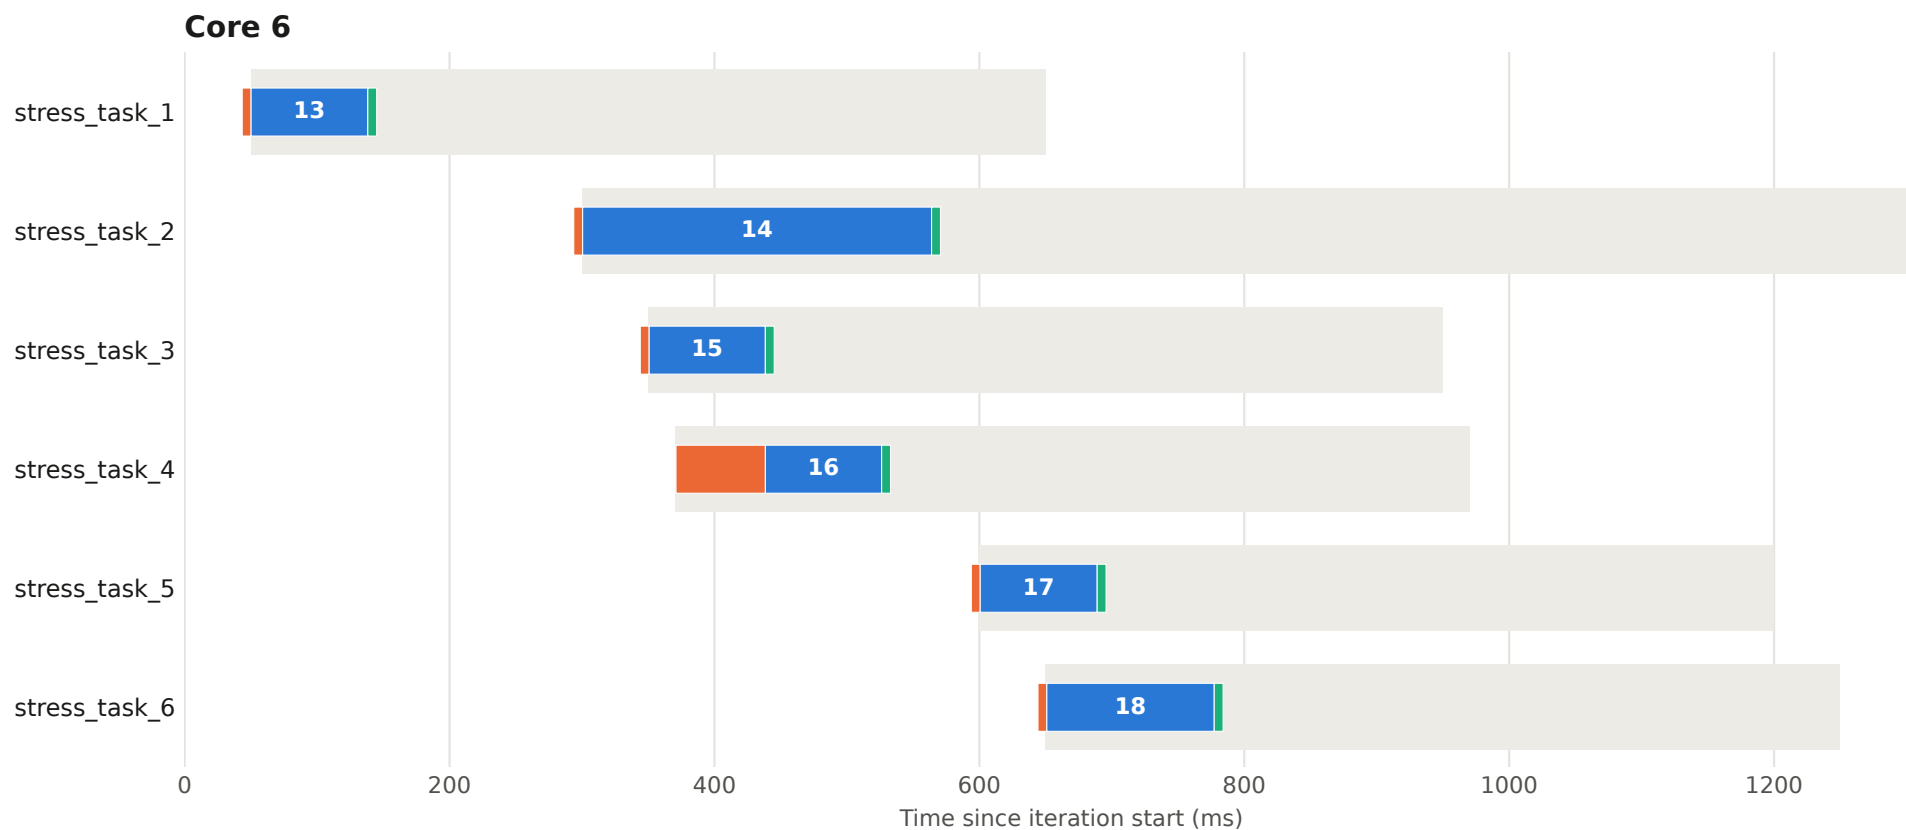


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 76 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

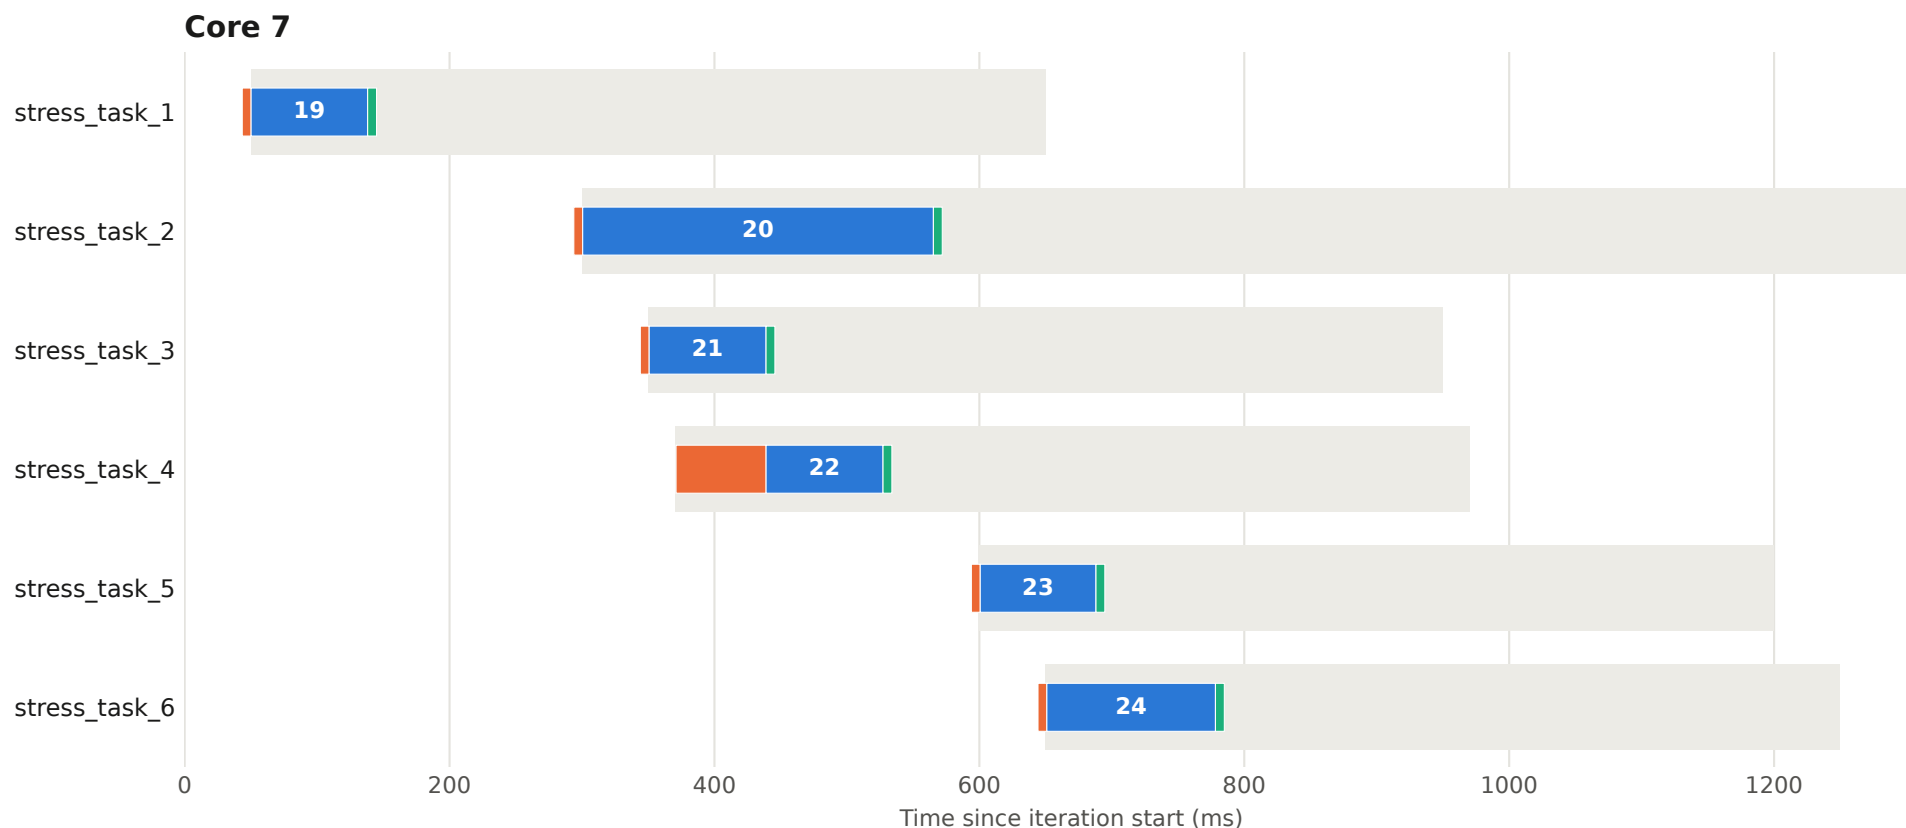


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 77 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

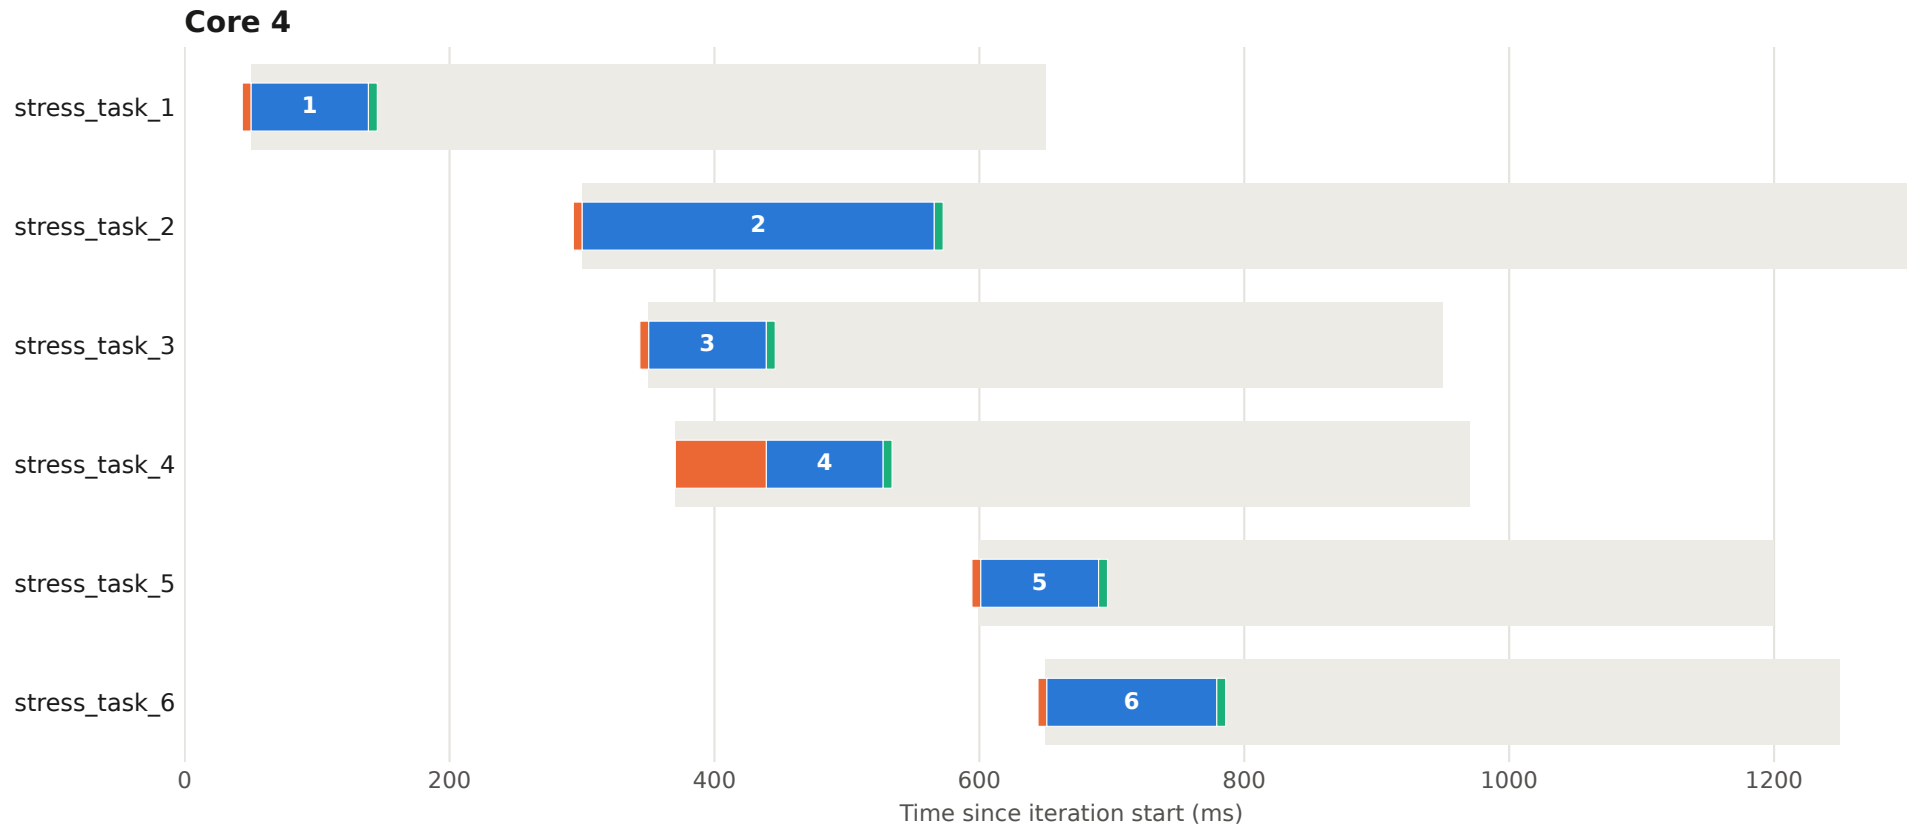


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 77 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

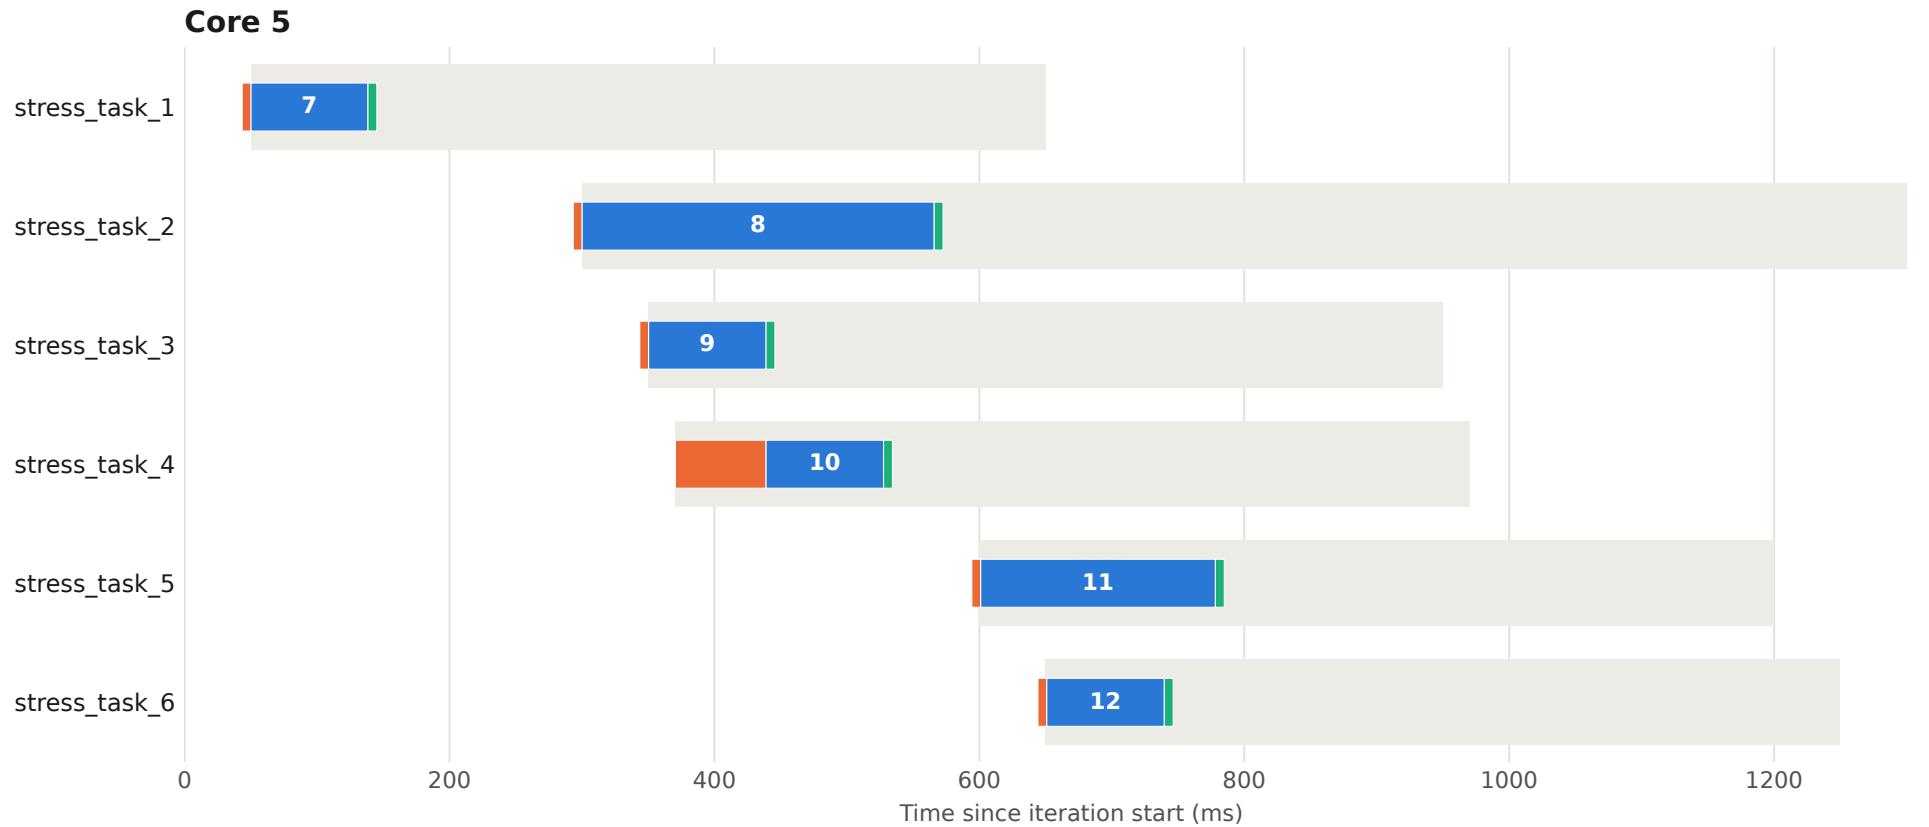


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 77 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

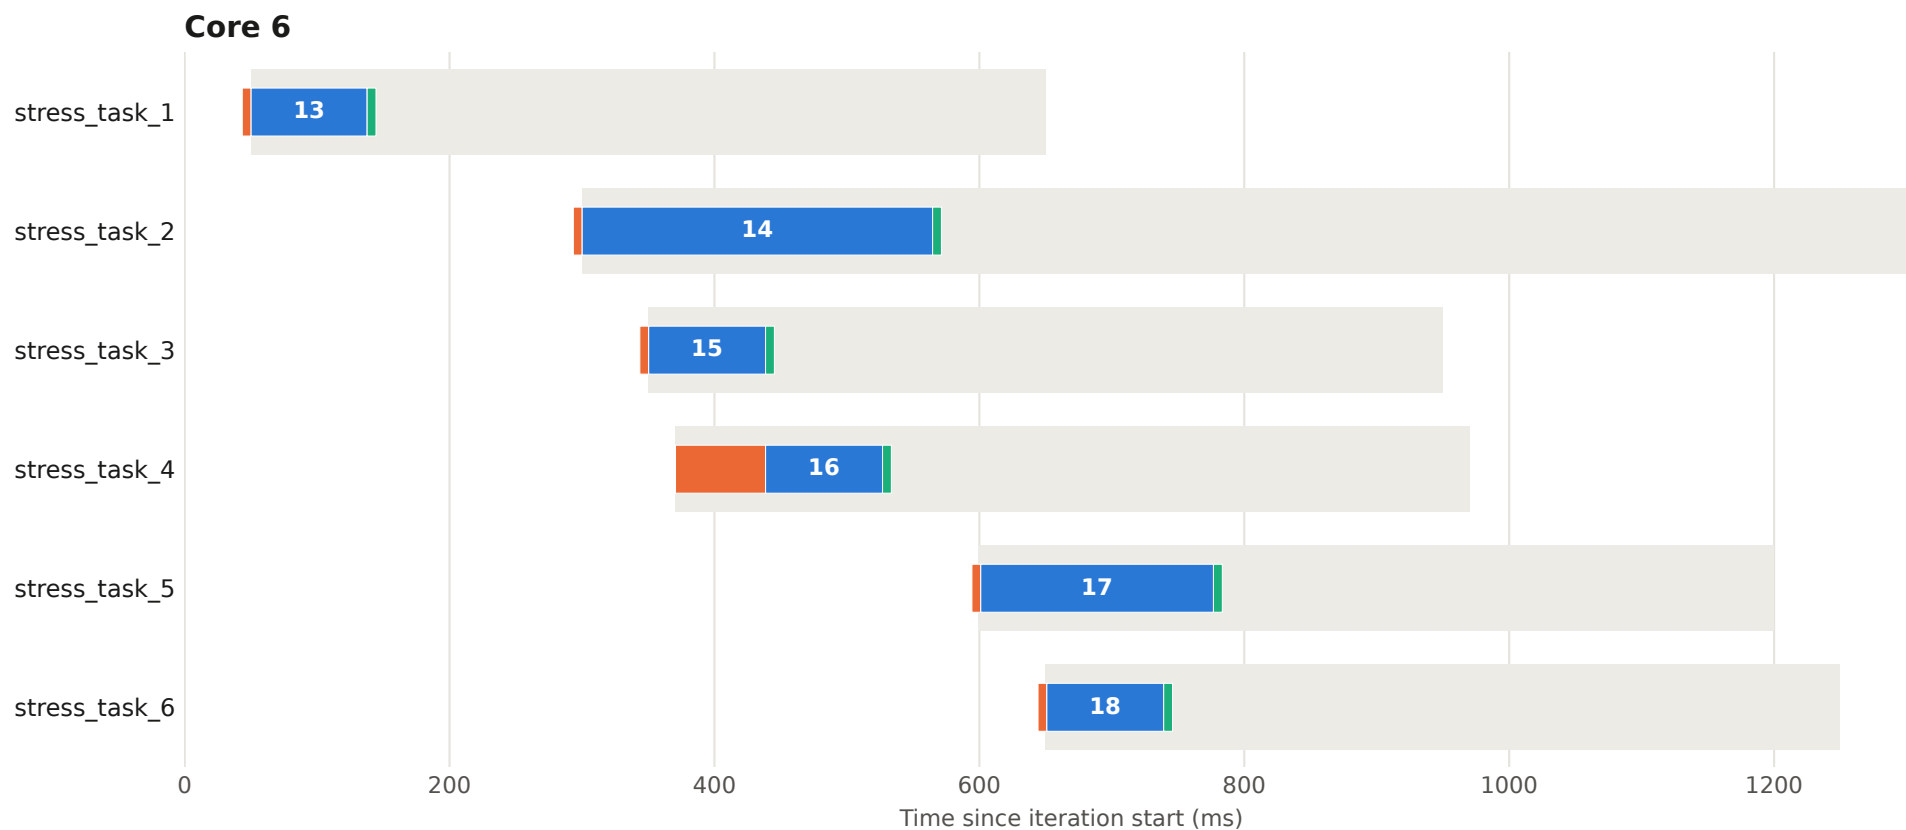


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 77 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

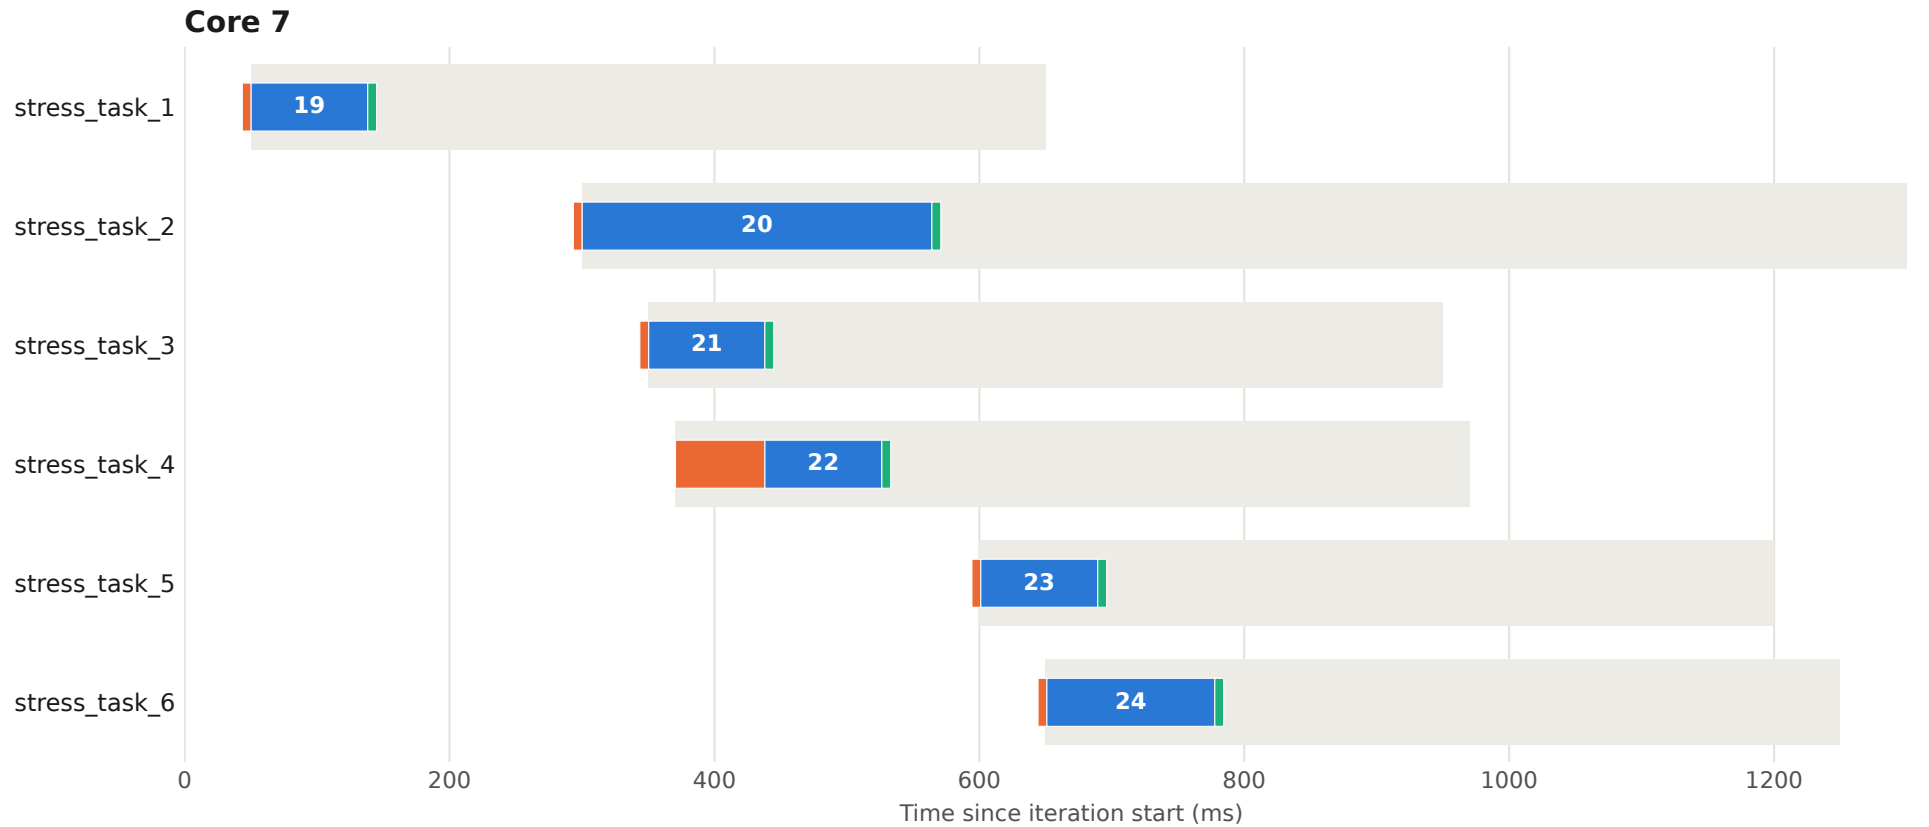


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 78 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

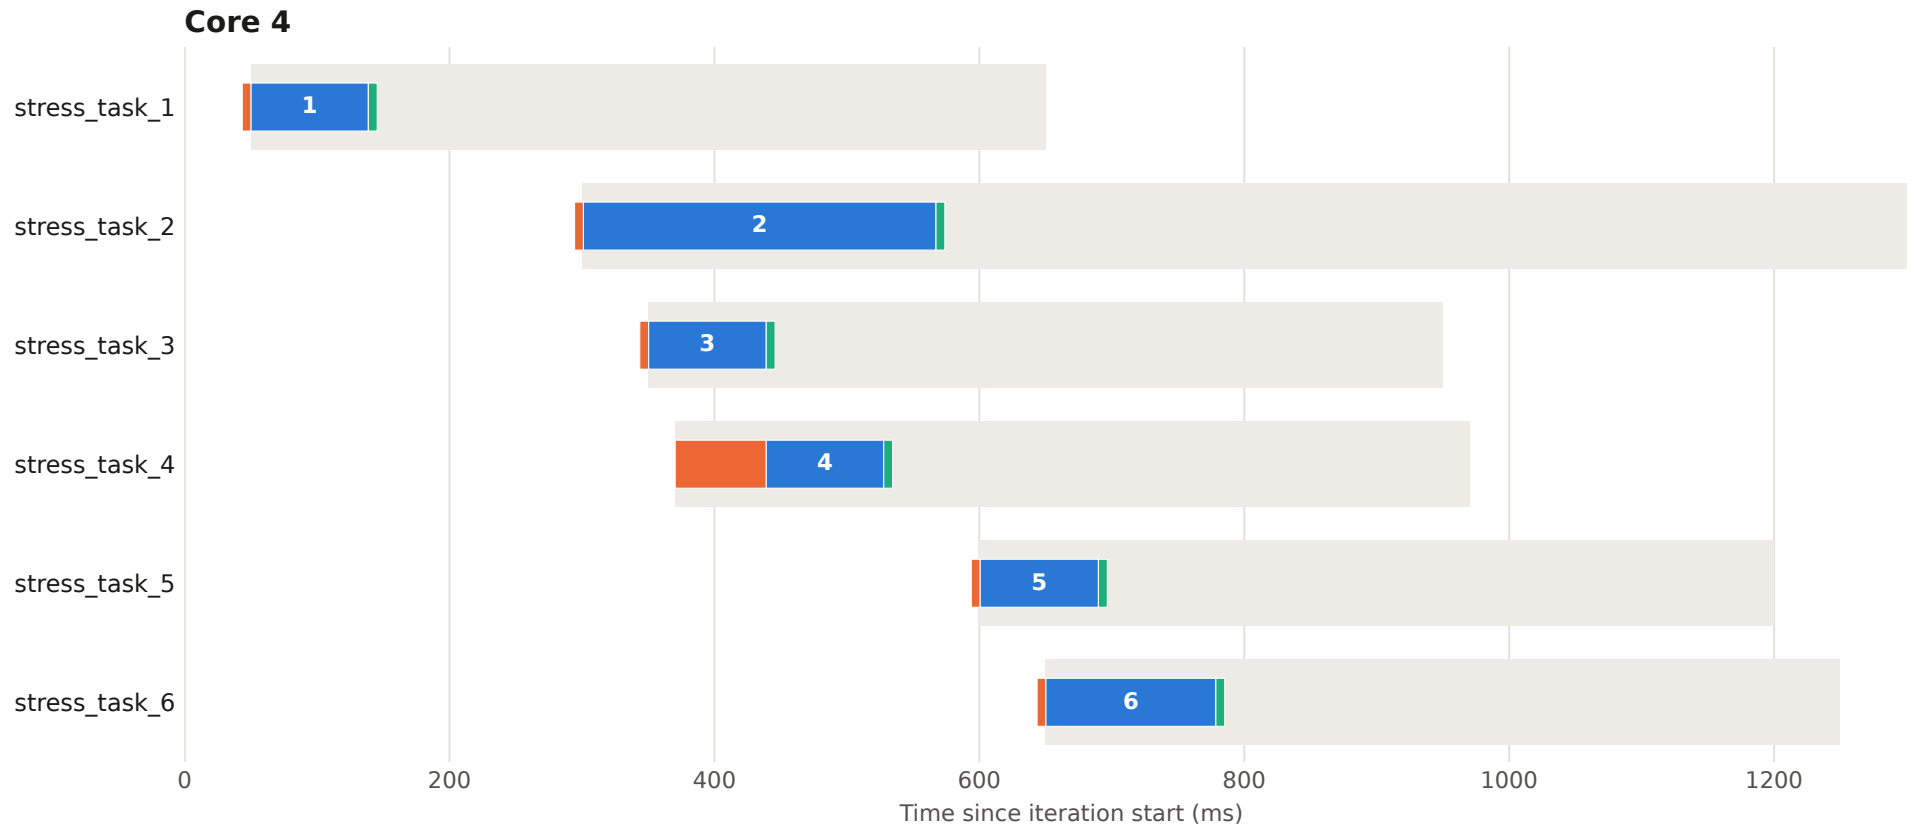


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 78 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

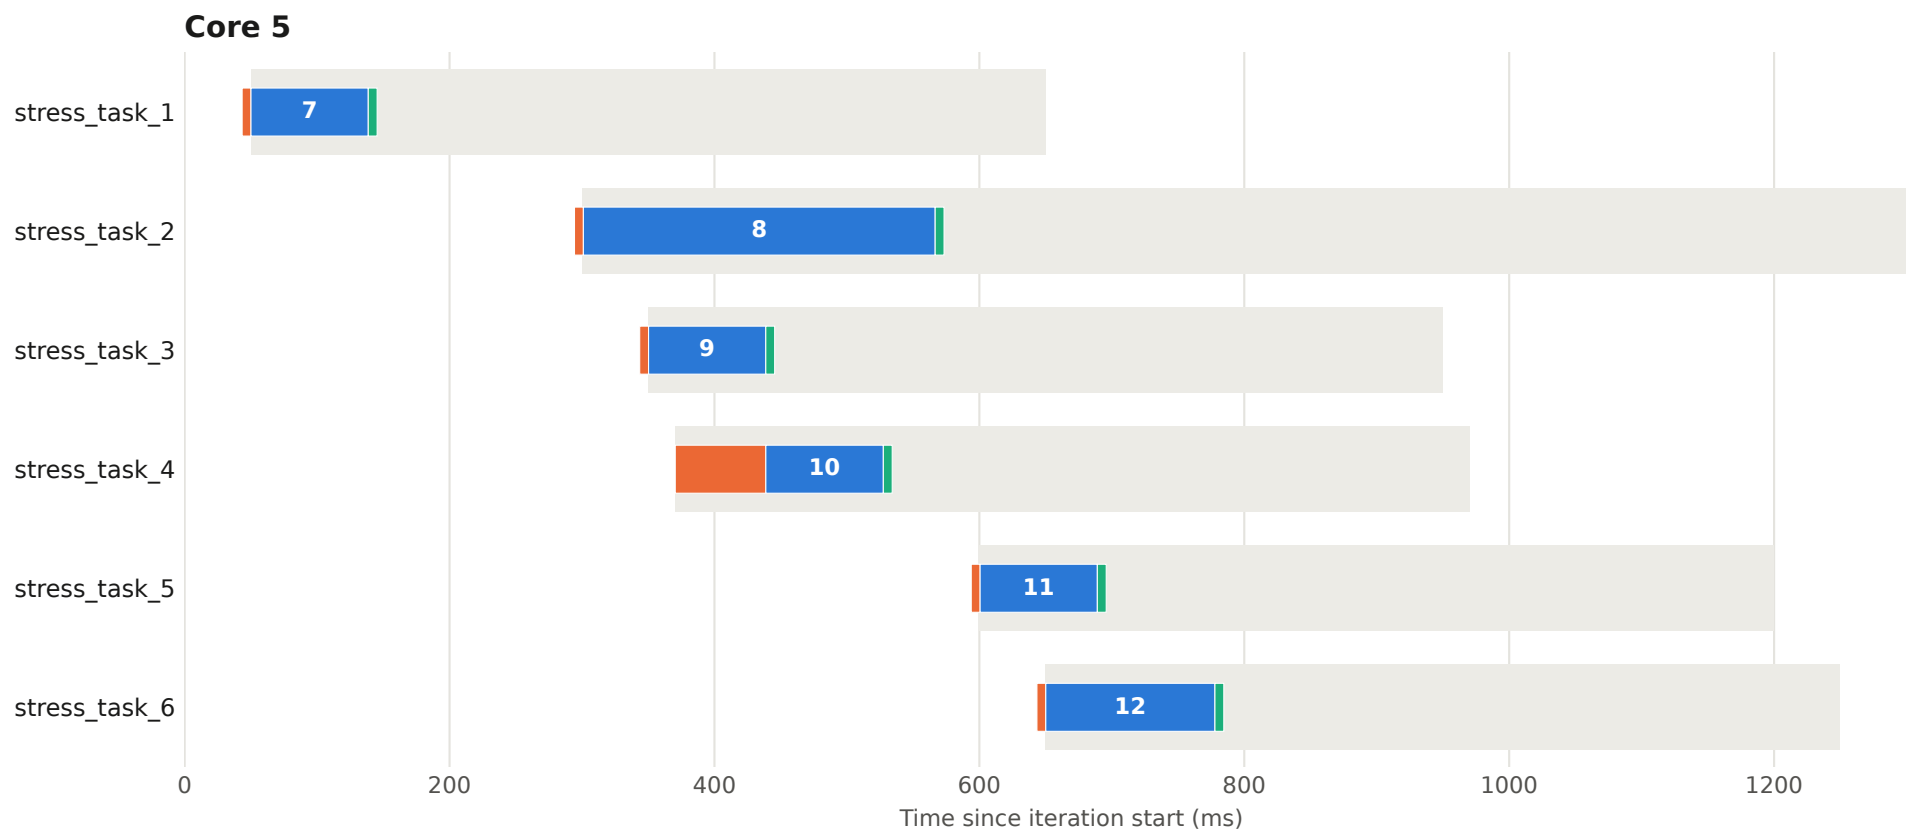


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 78 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

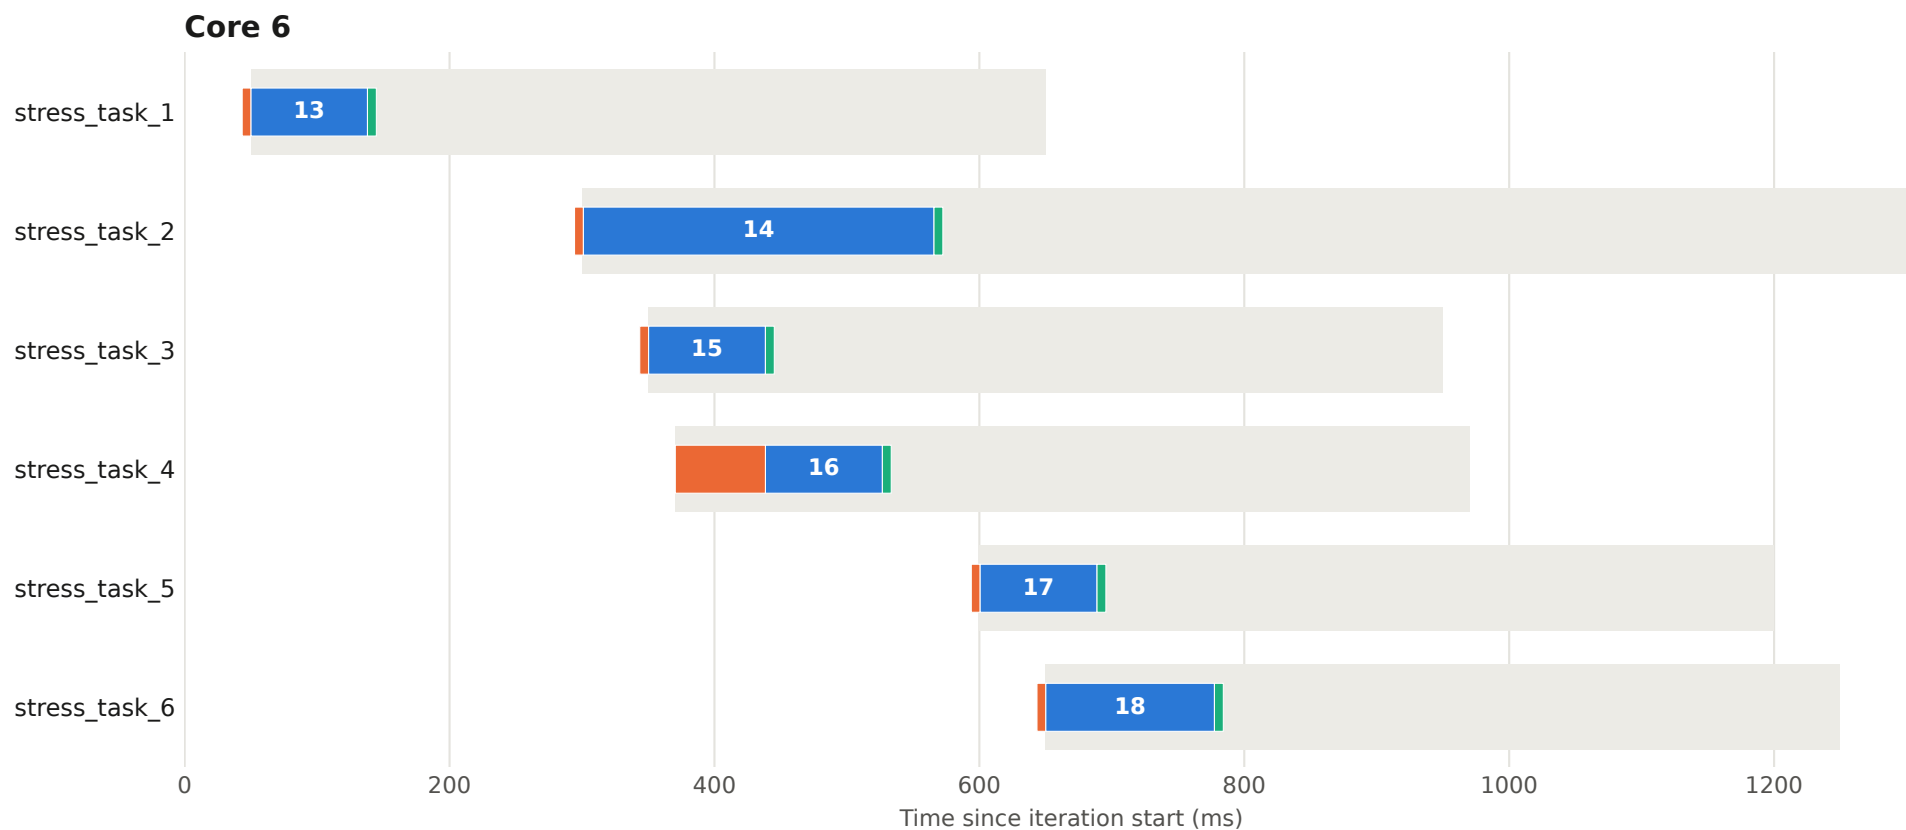


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 78 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

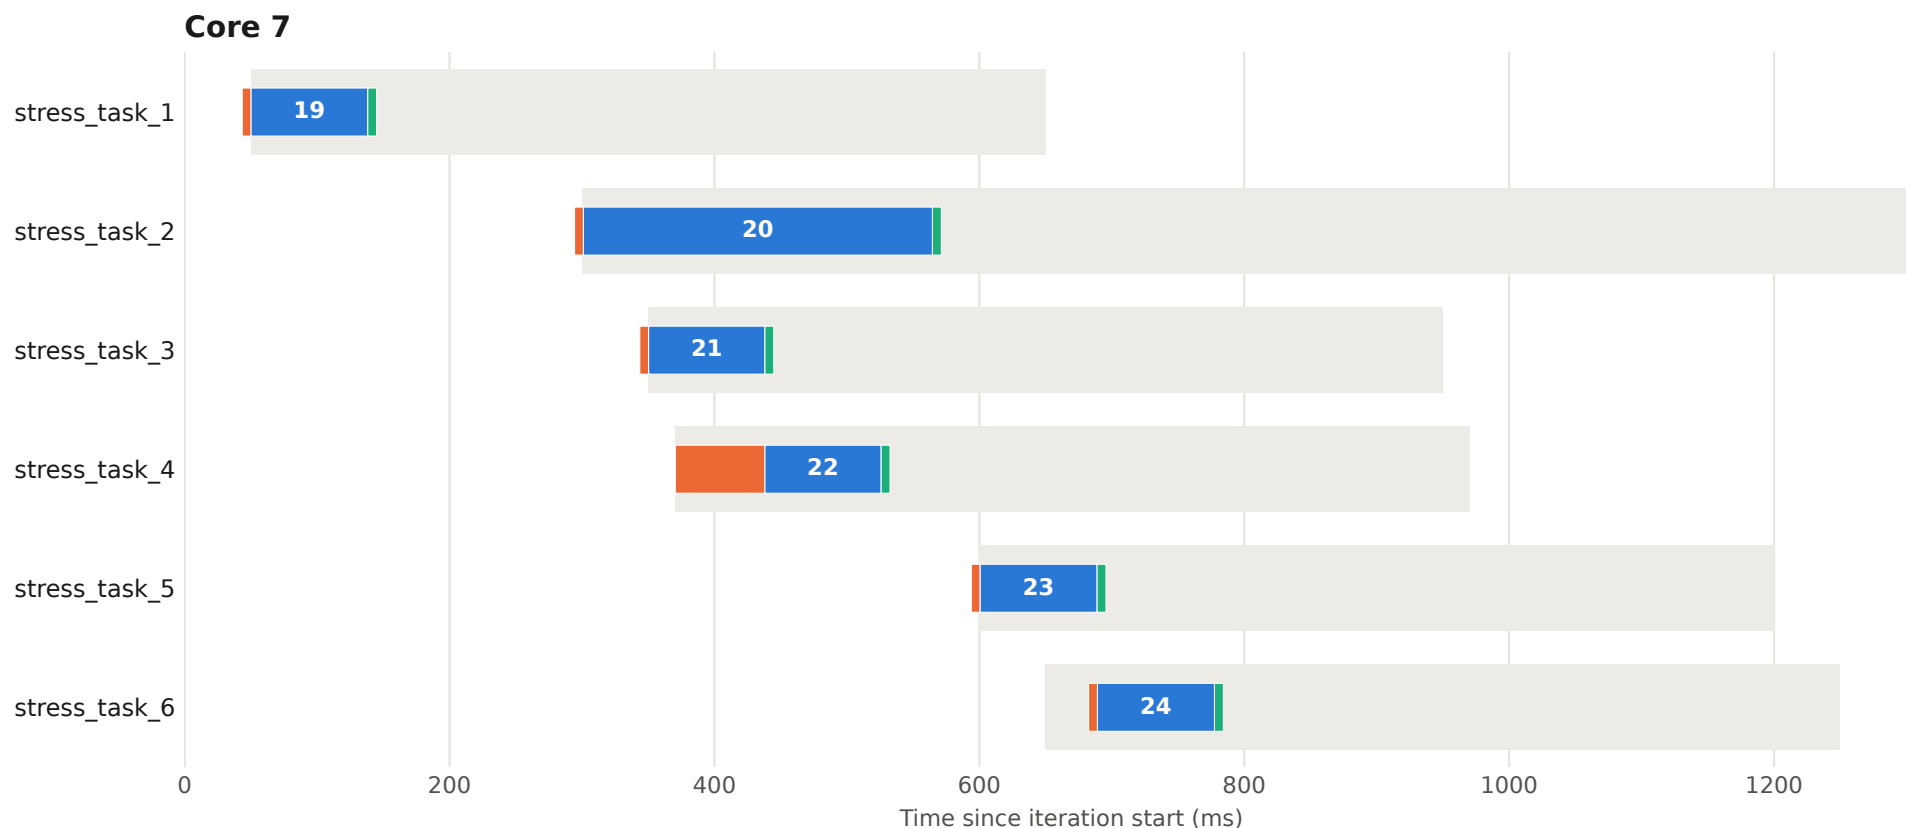


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 79 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

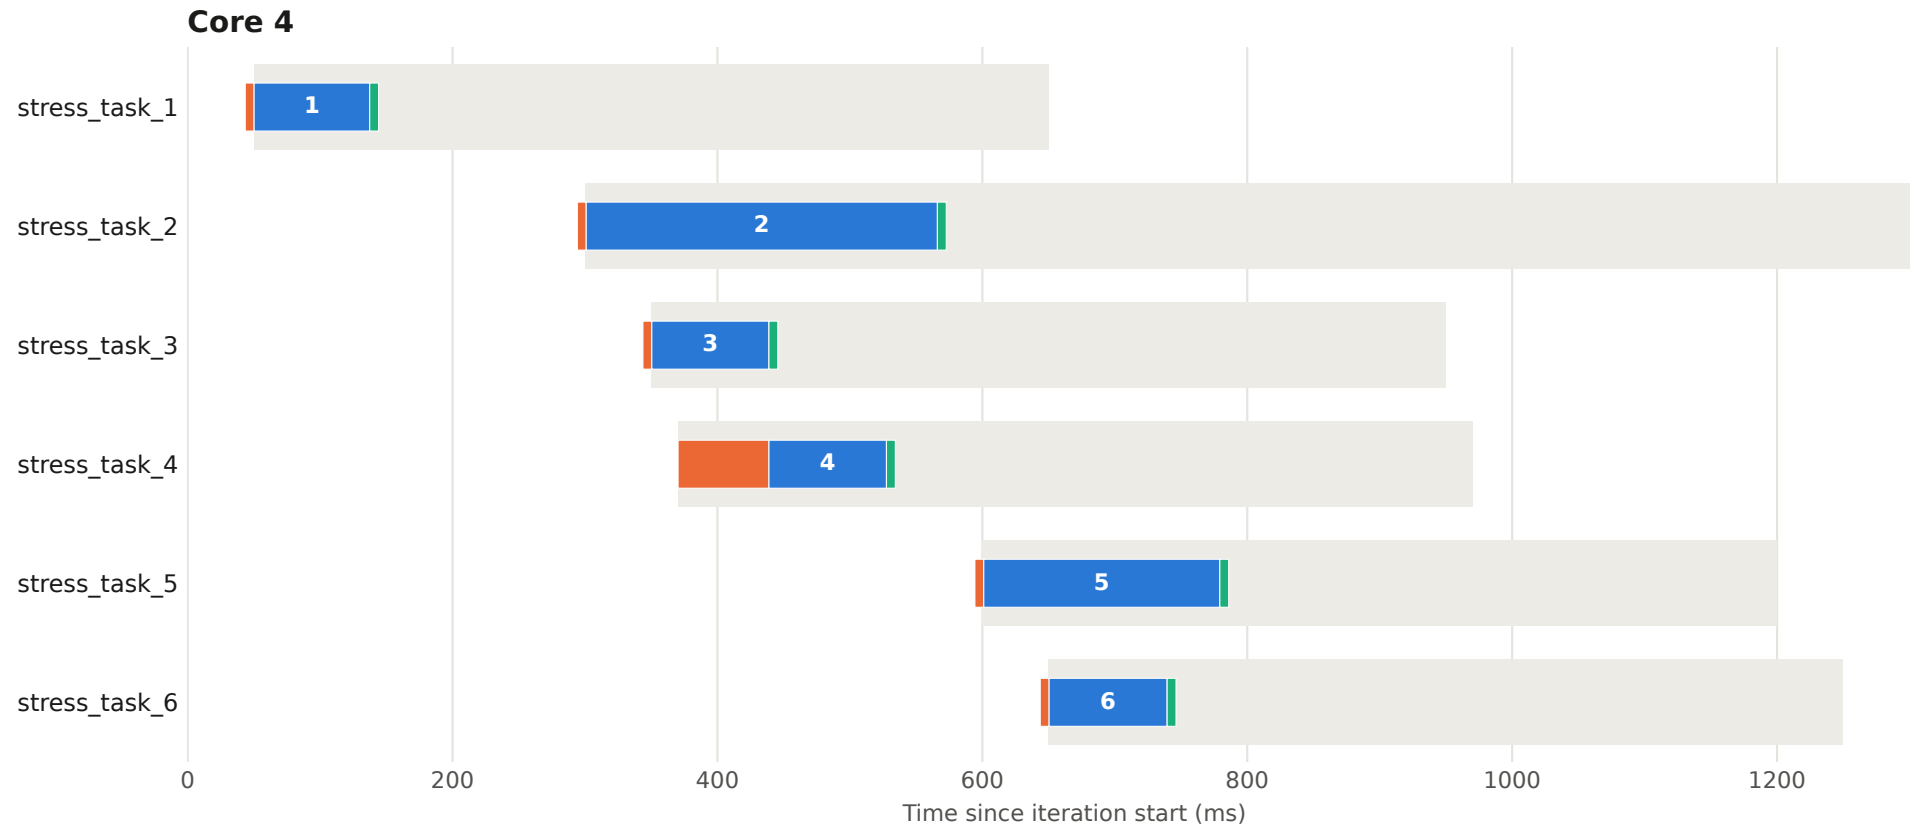


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 79 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

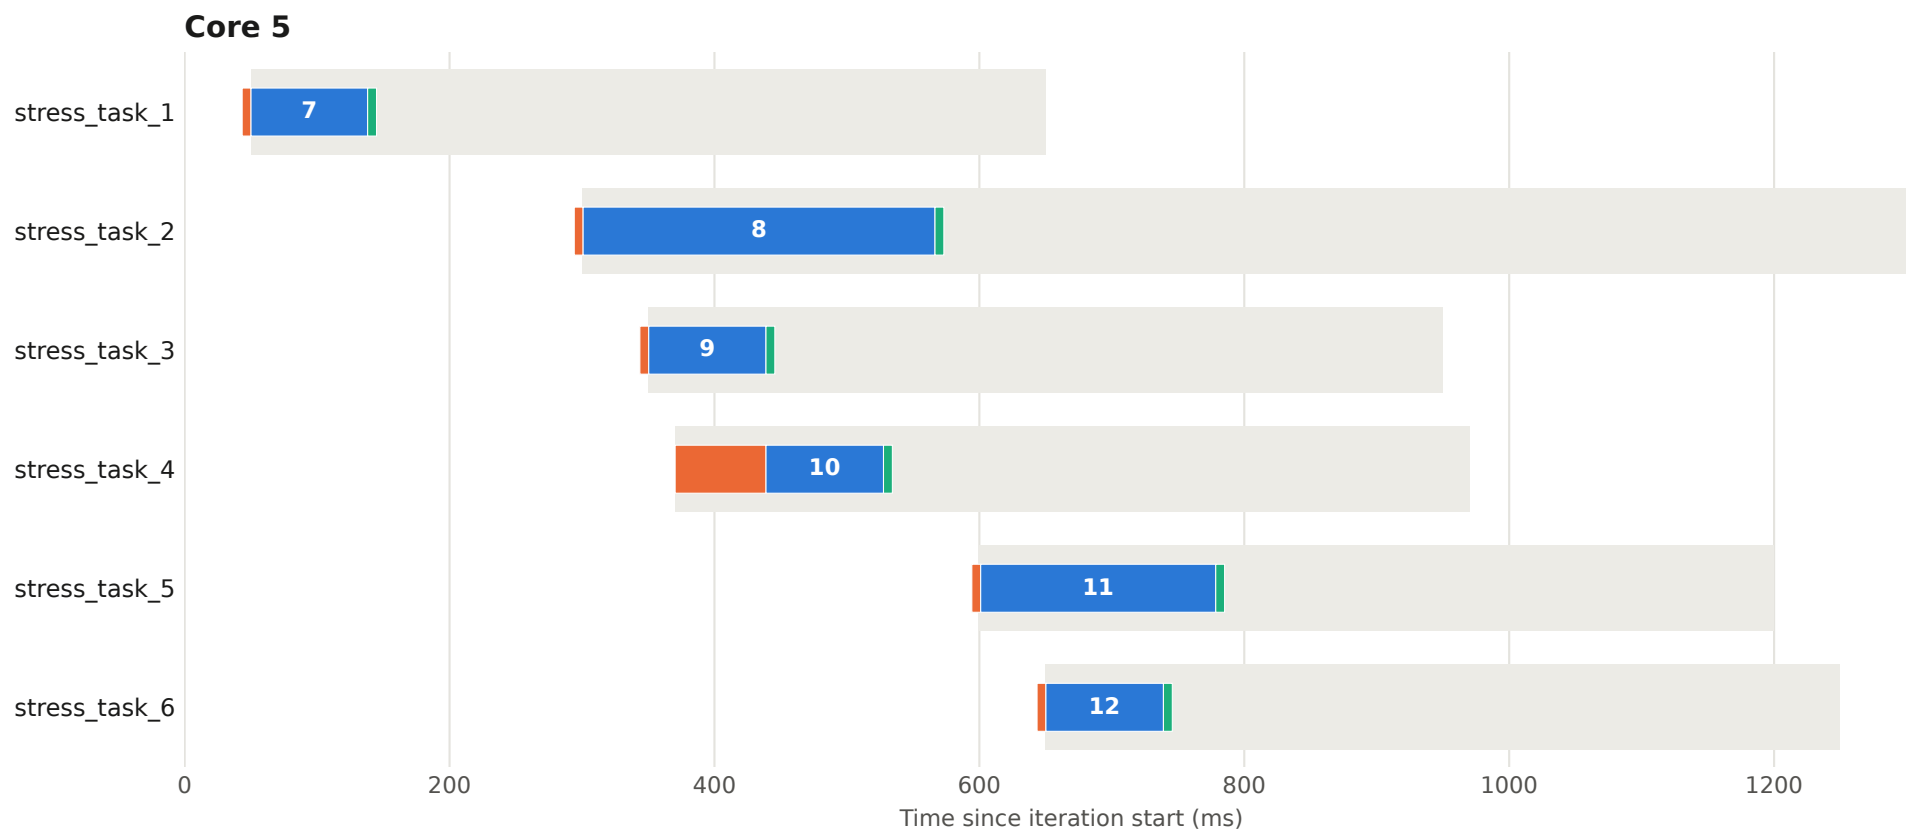


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 79 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

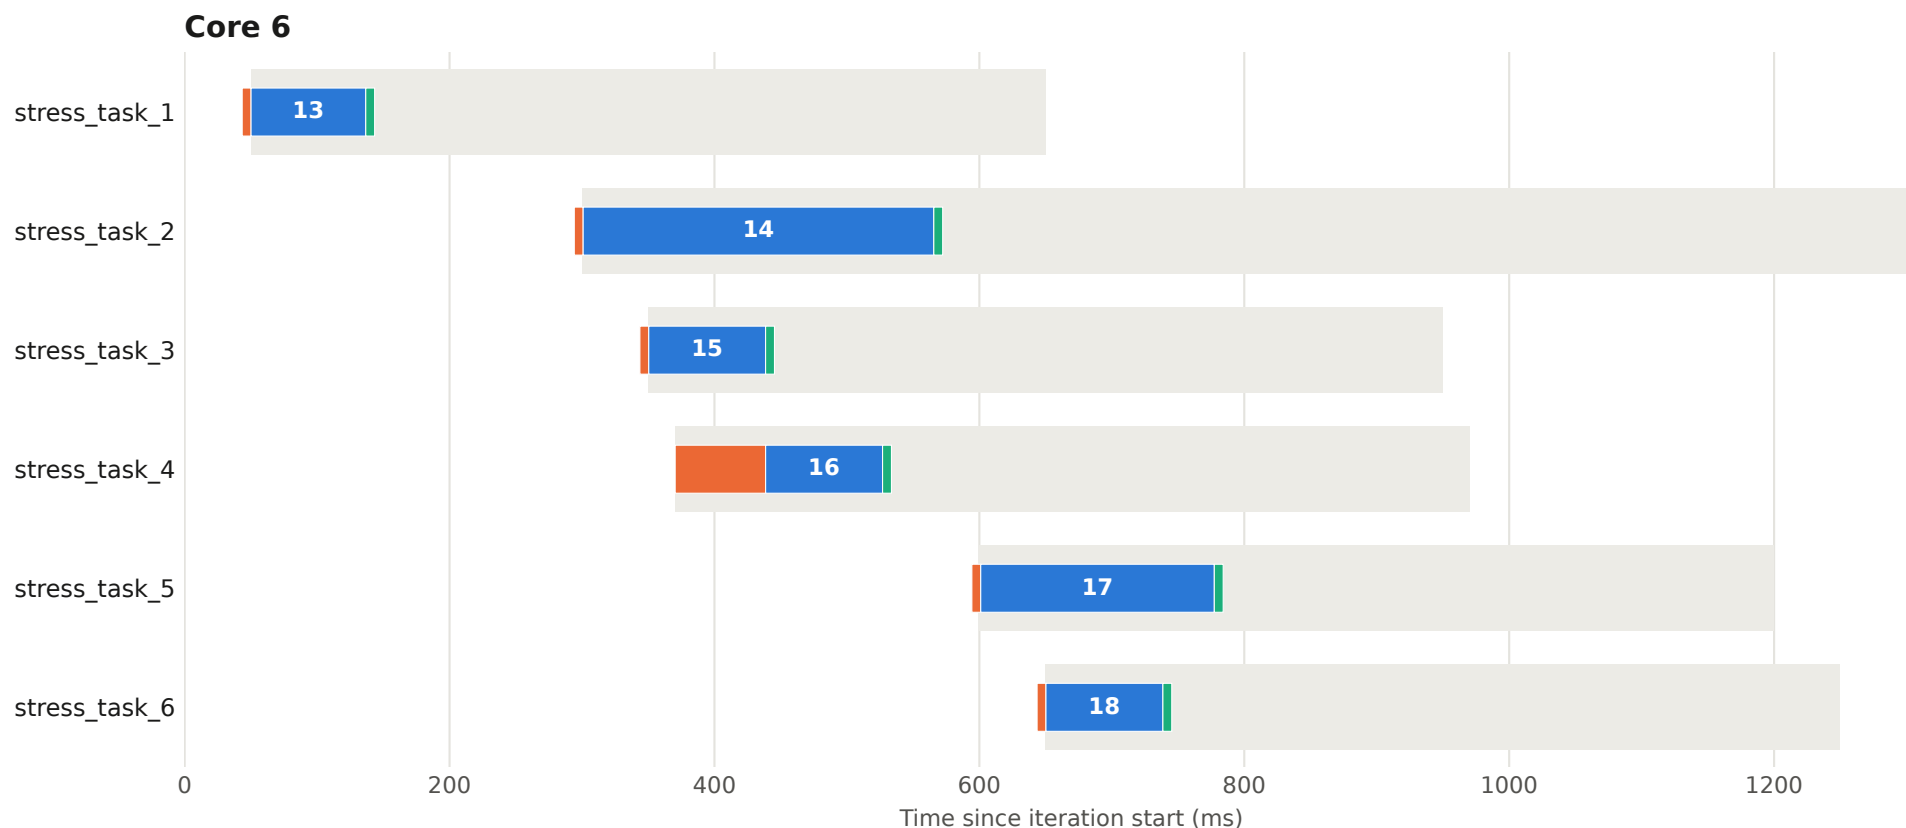


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 79 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

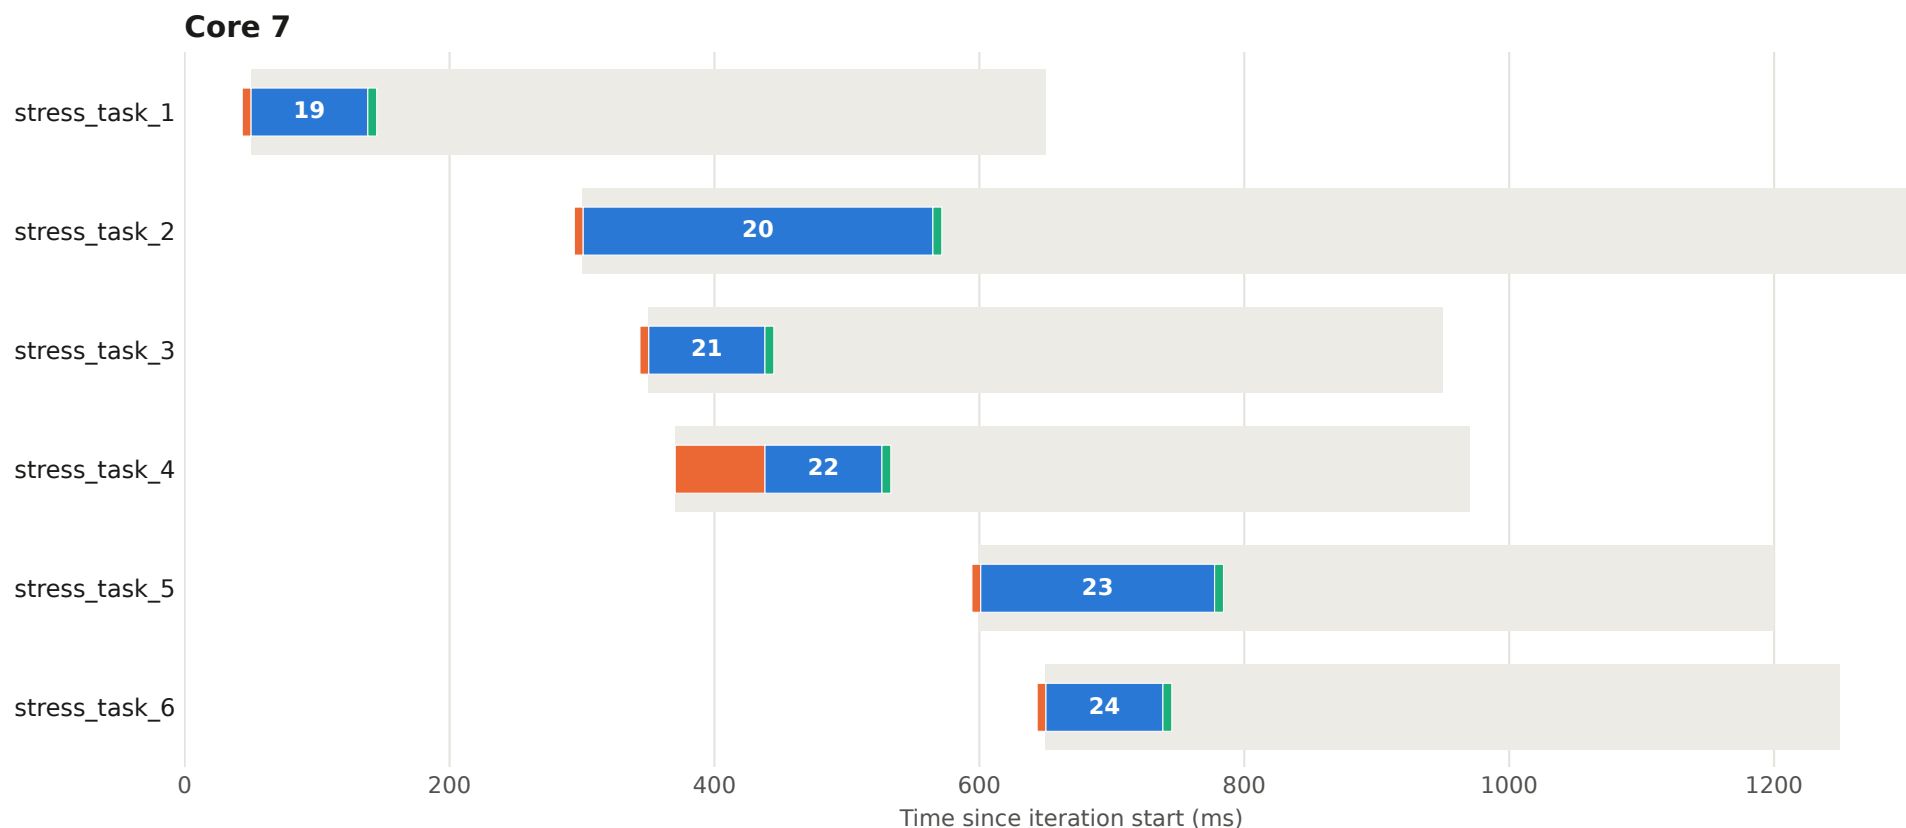


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 80 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

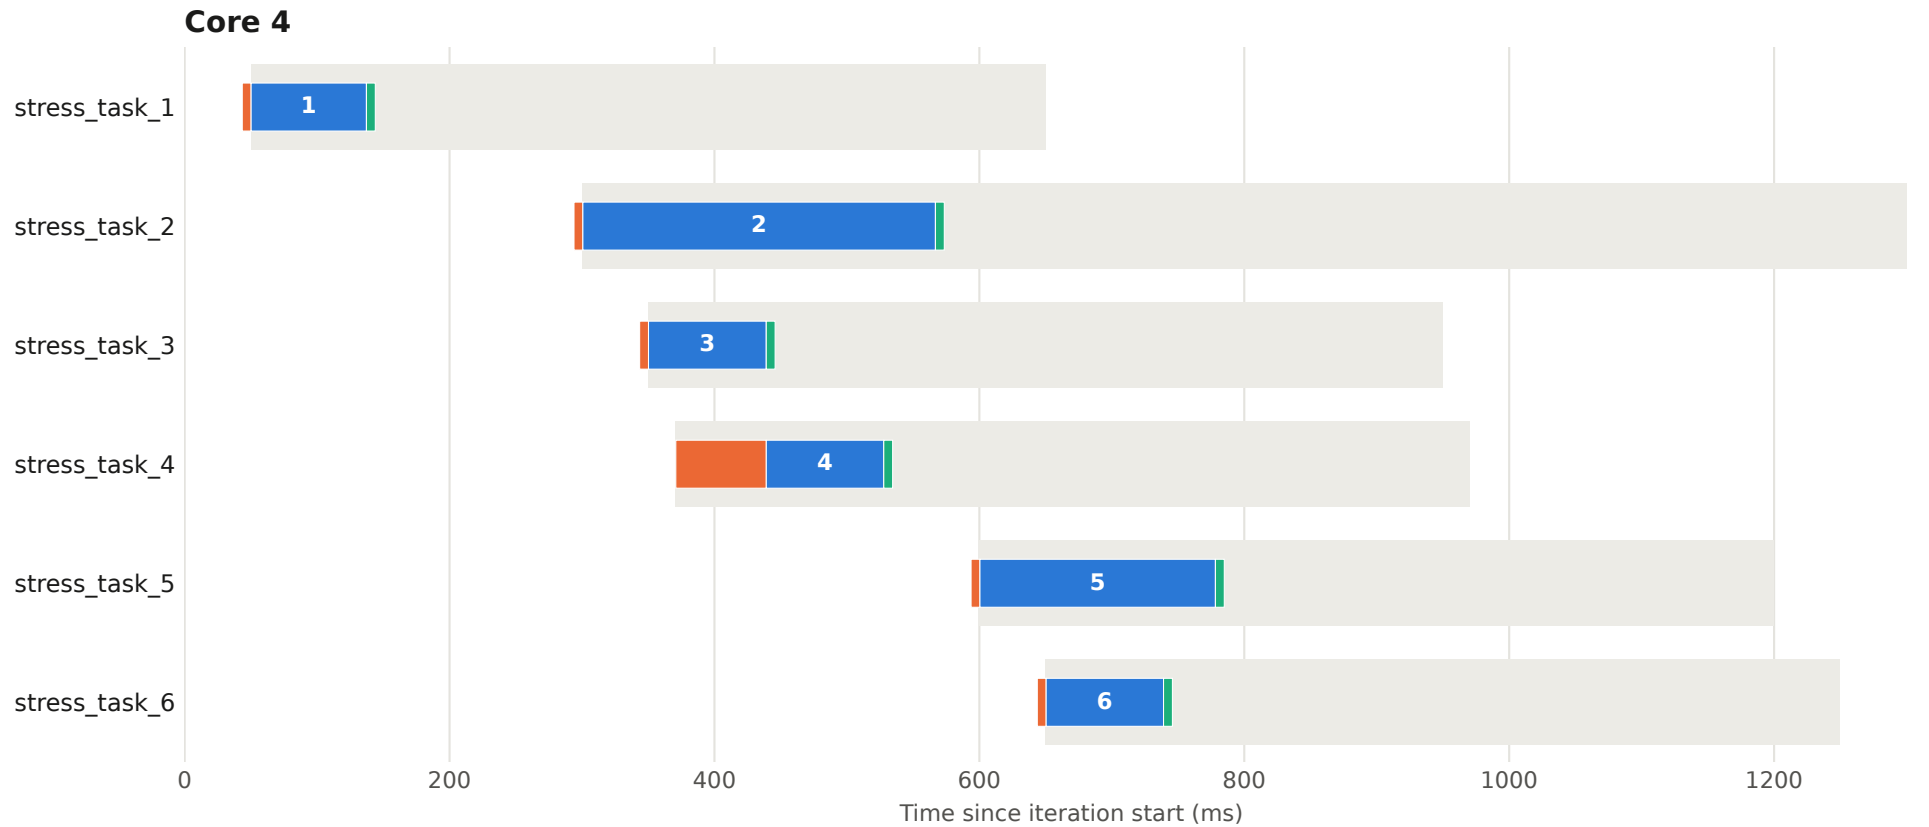


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 80 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

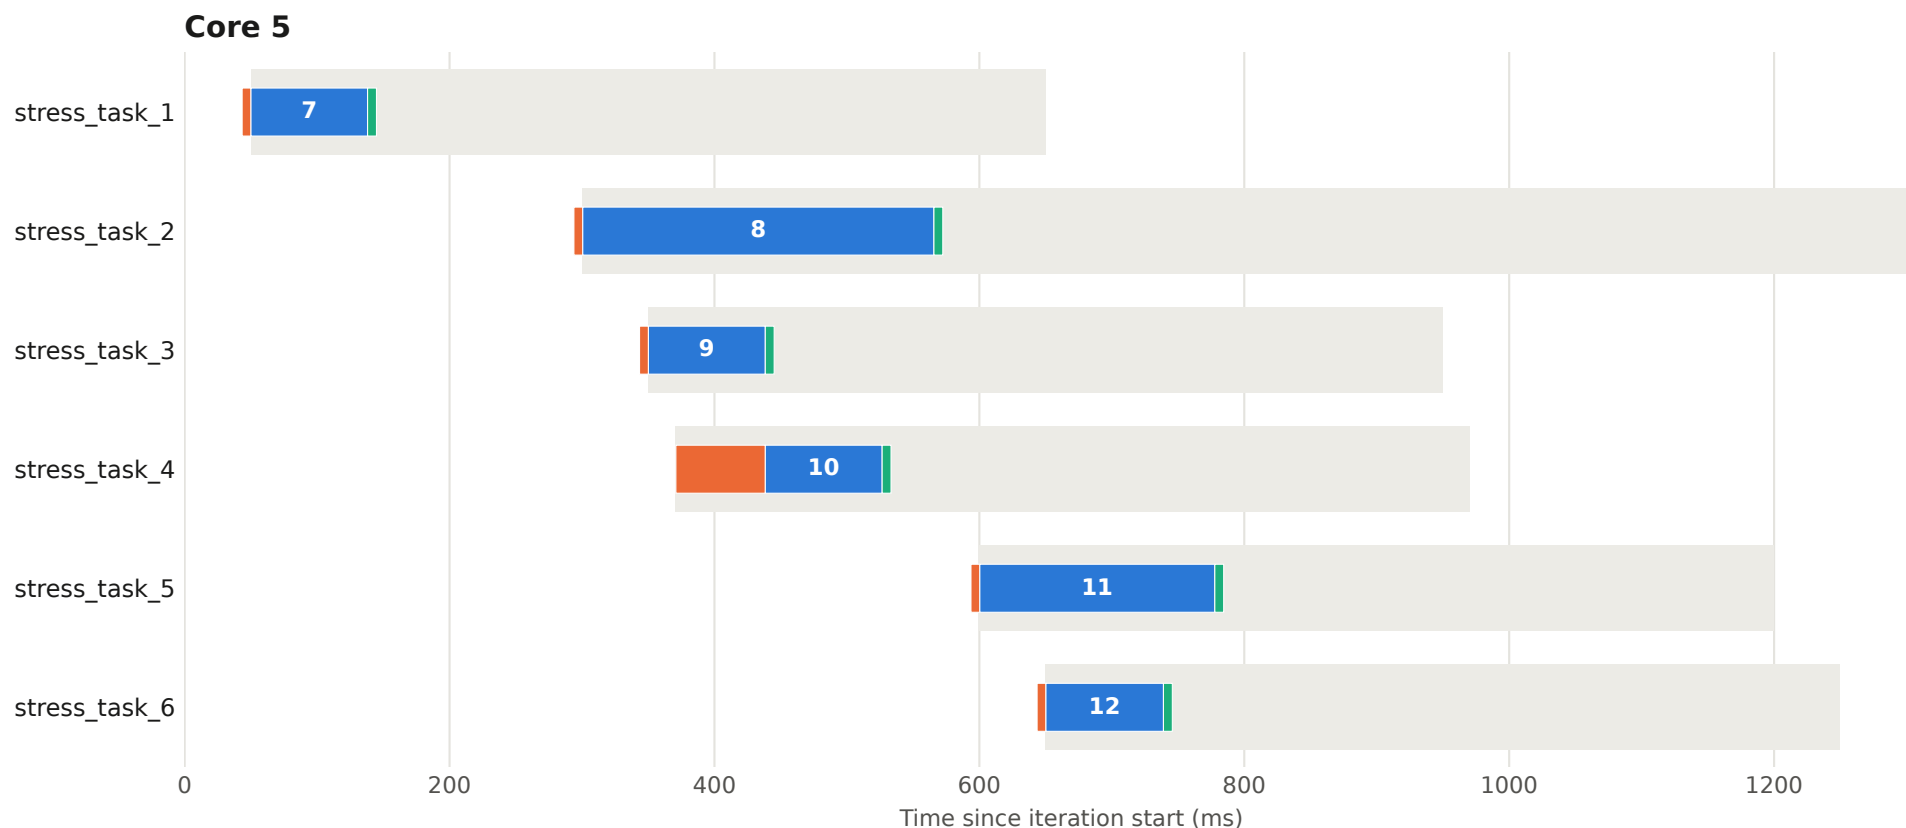


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 80 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

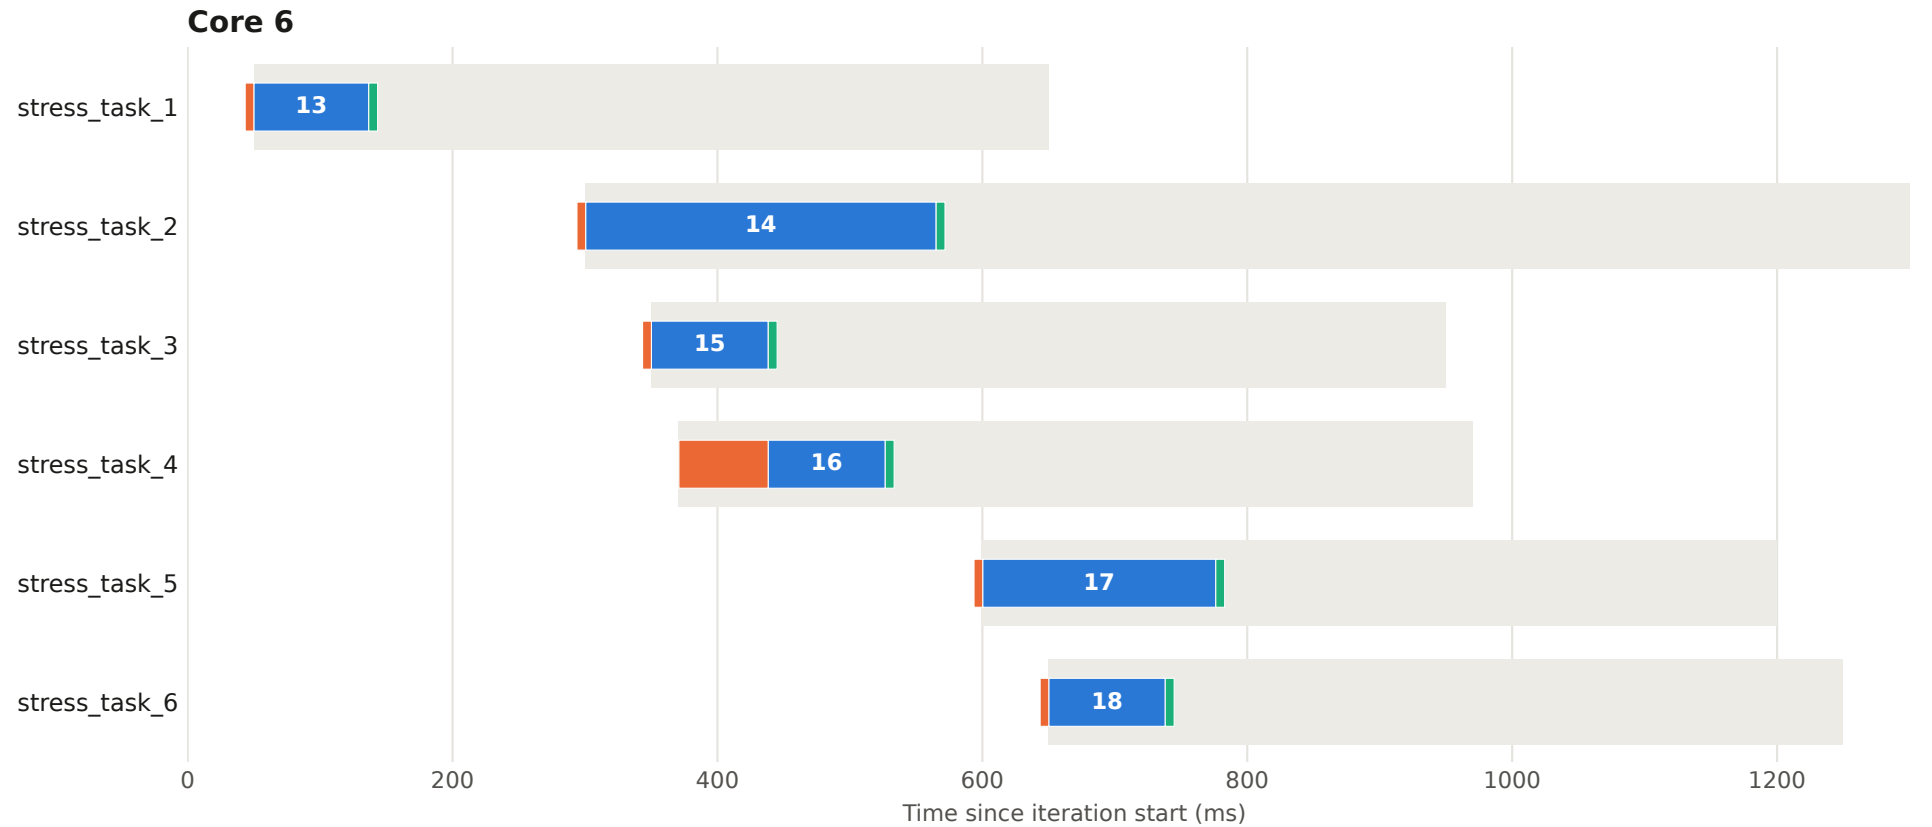


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 80 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

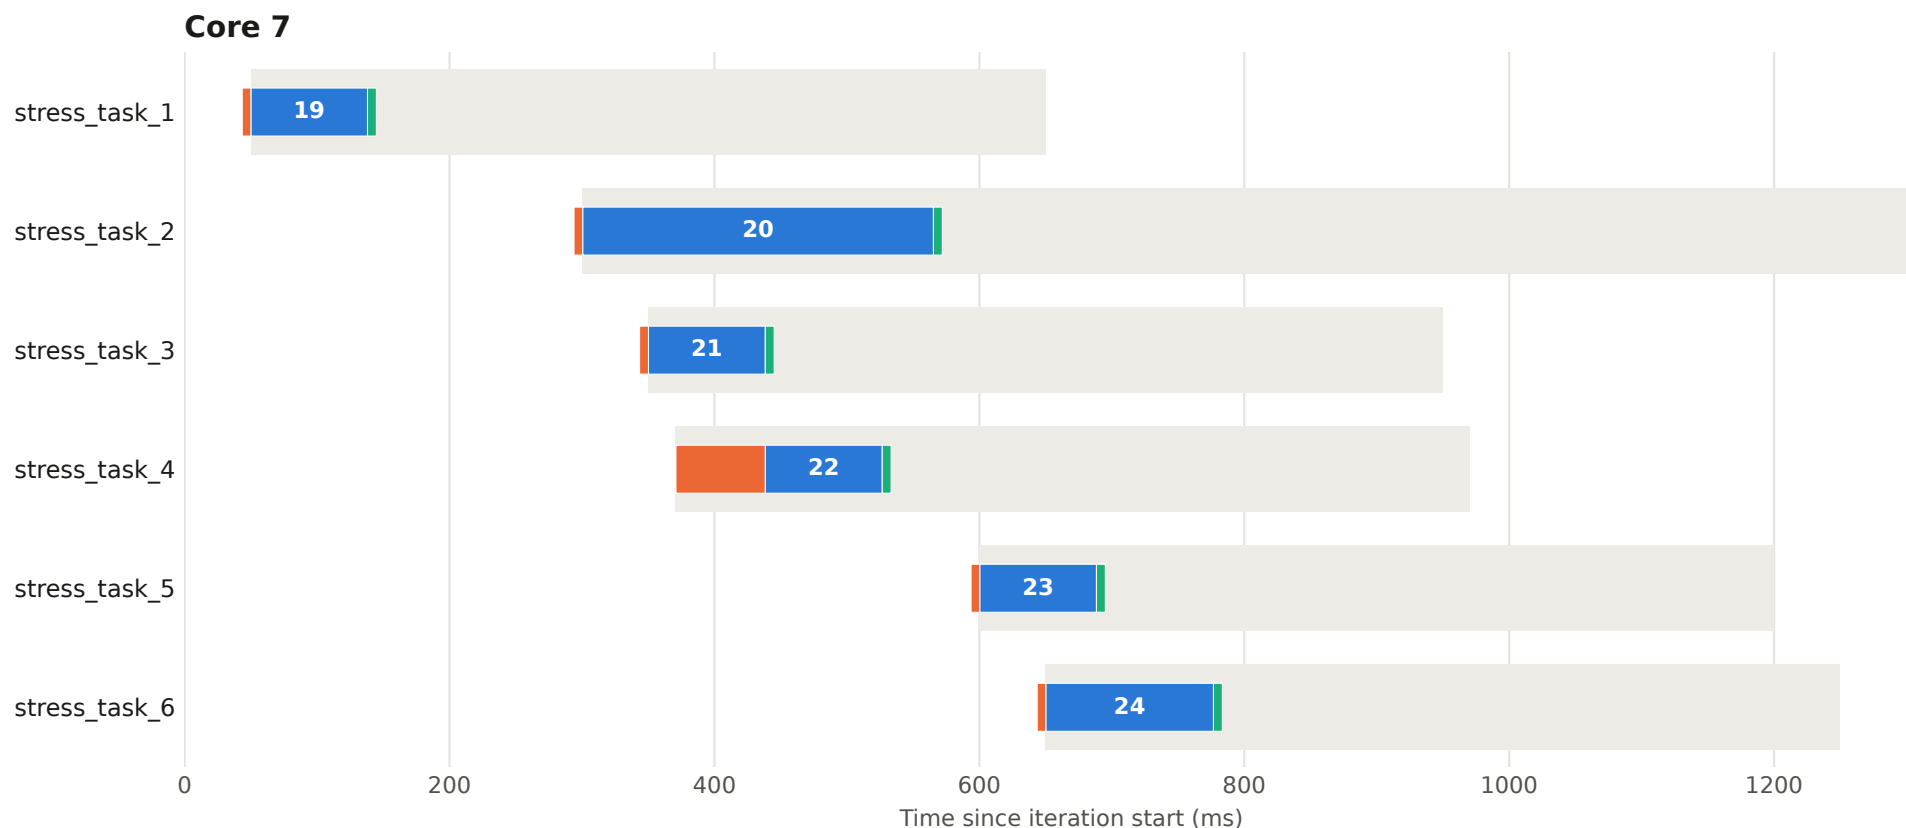


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 81 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

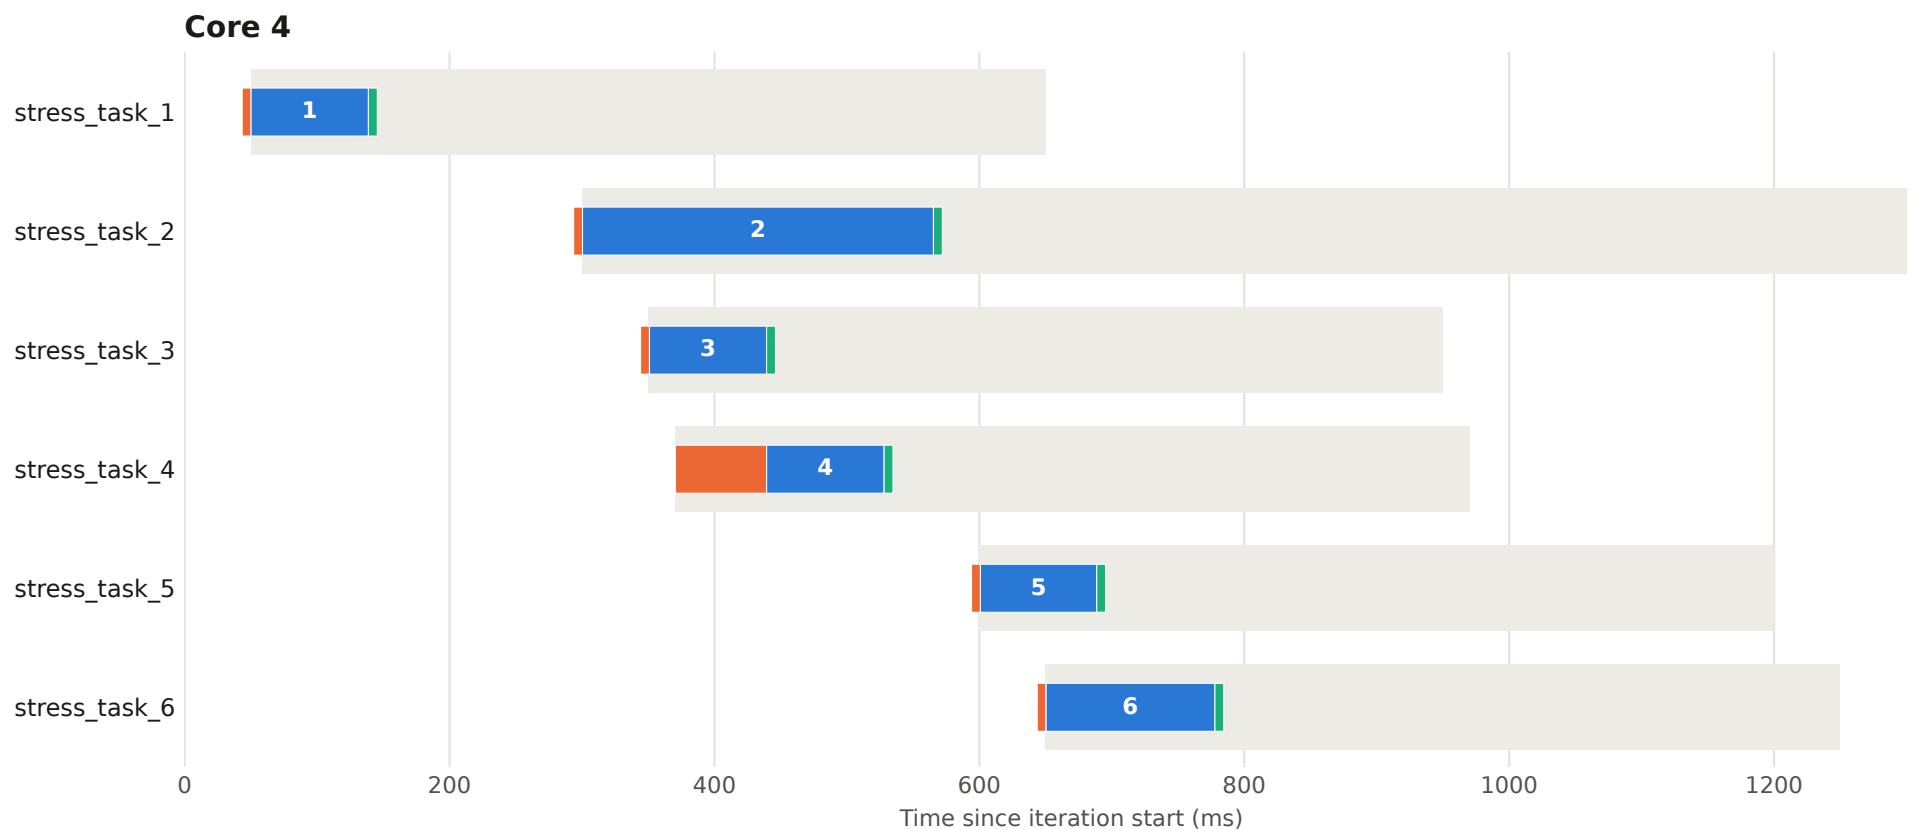


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 81 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

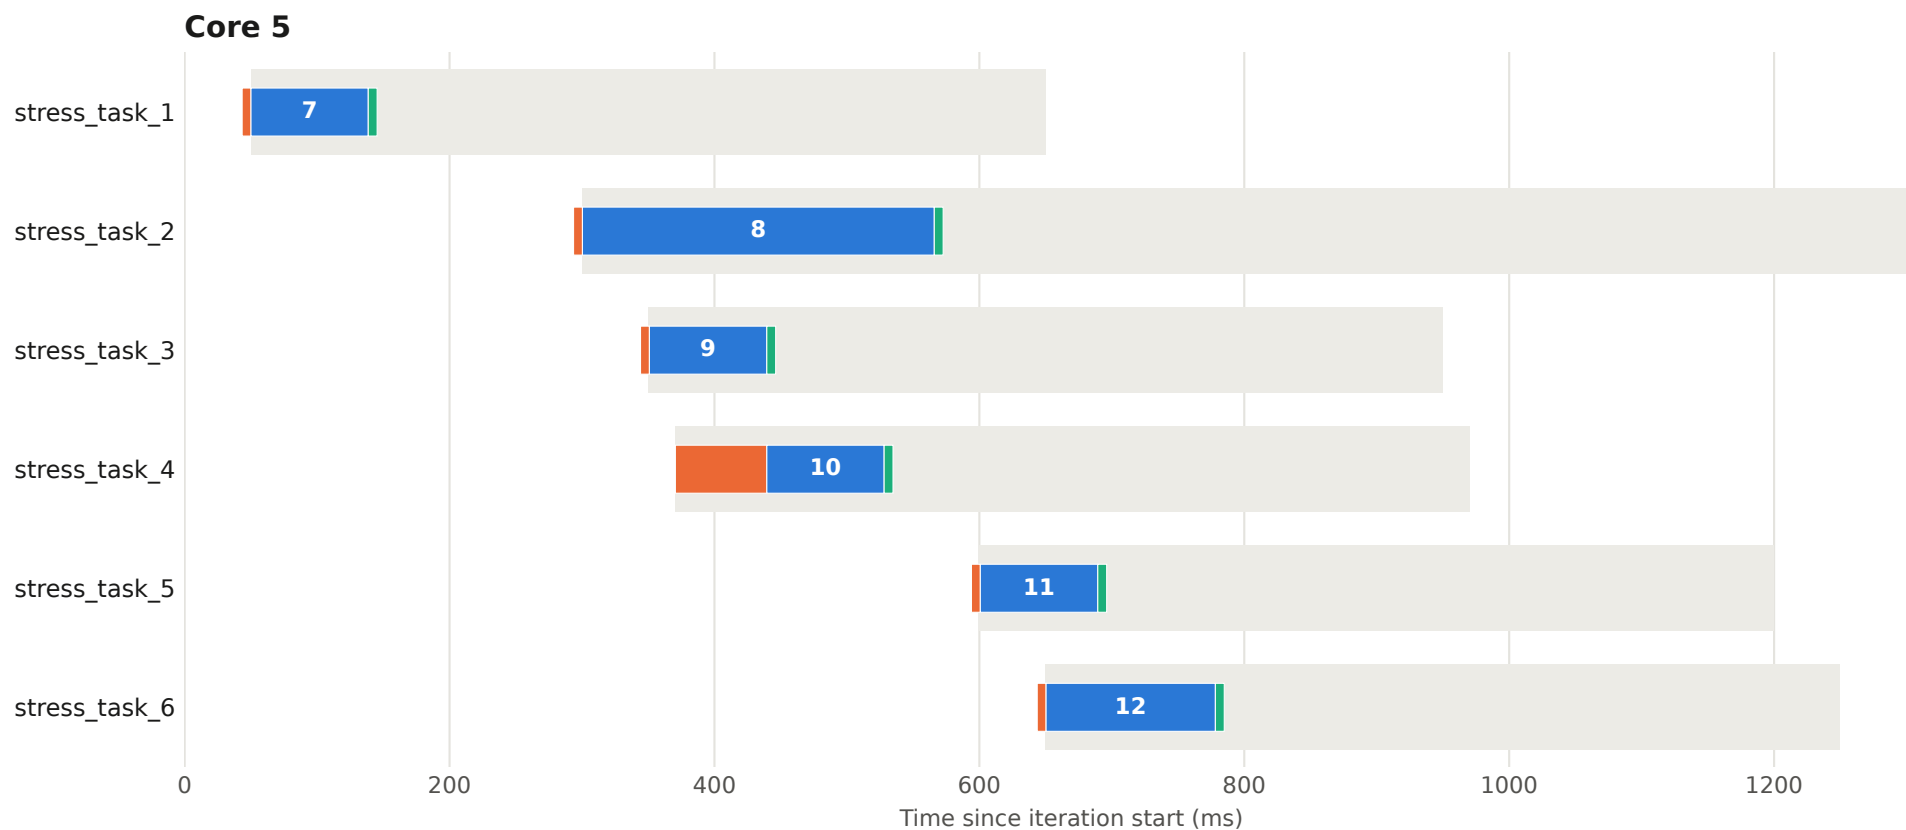


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 81 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

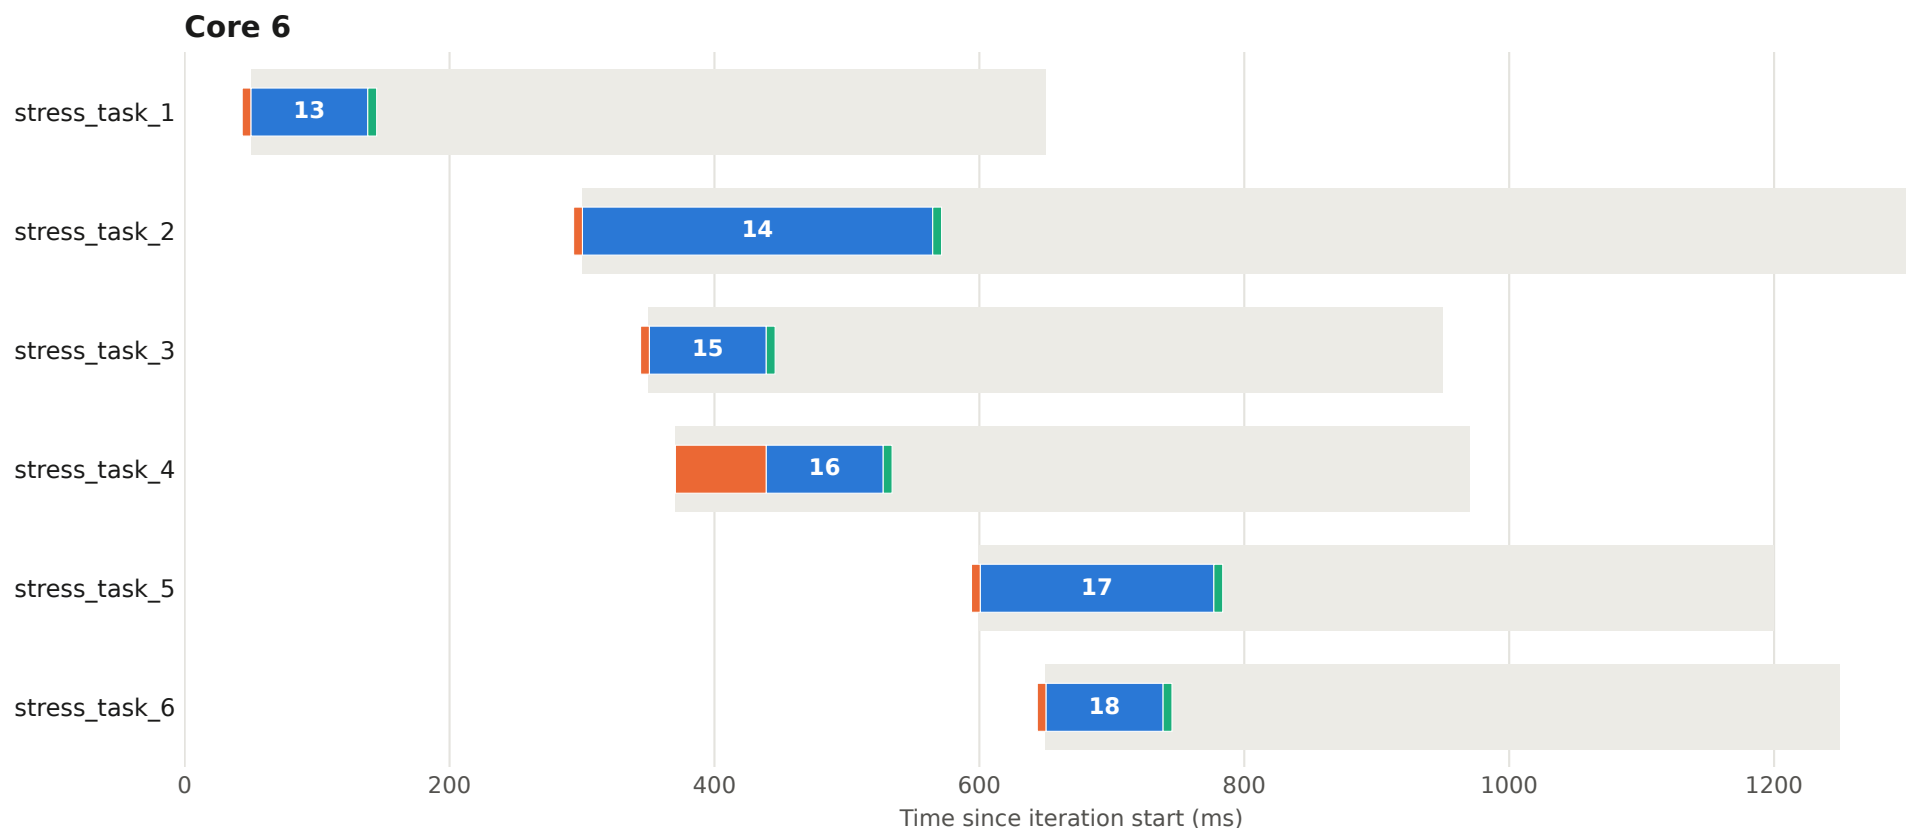


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 81 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

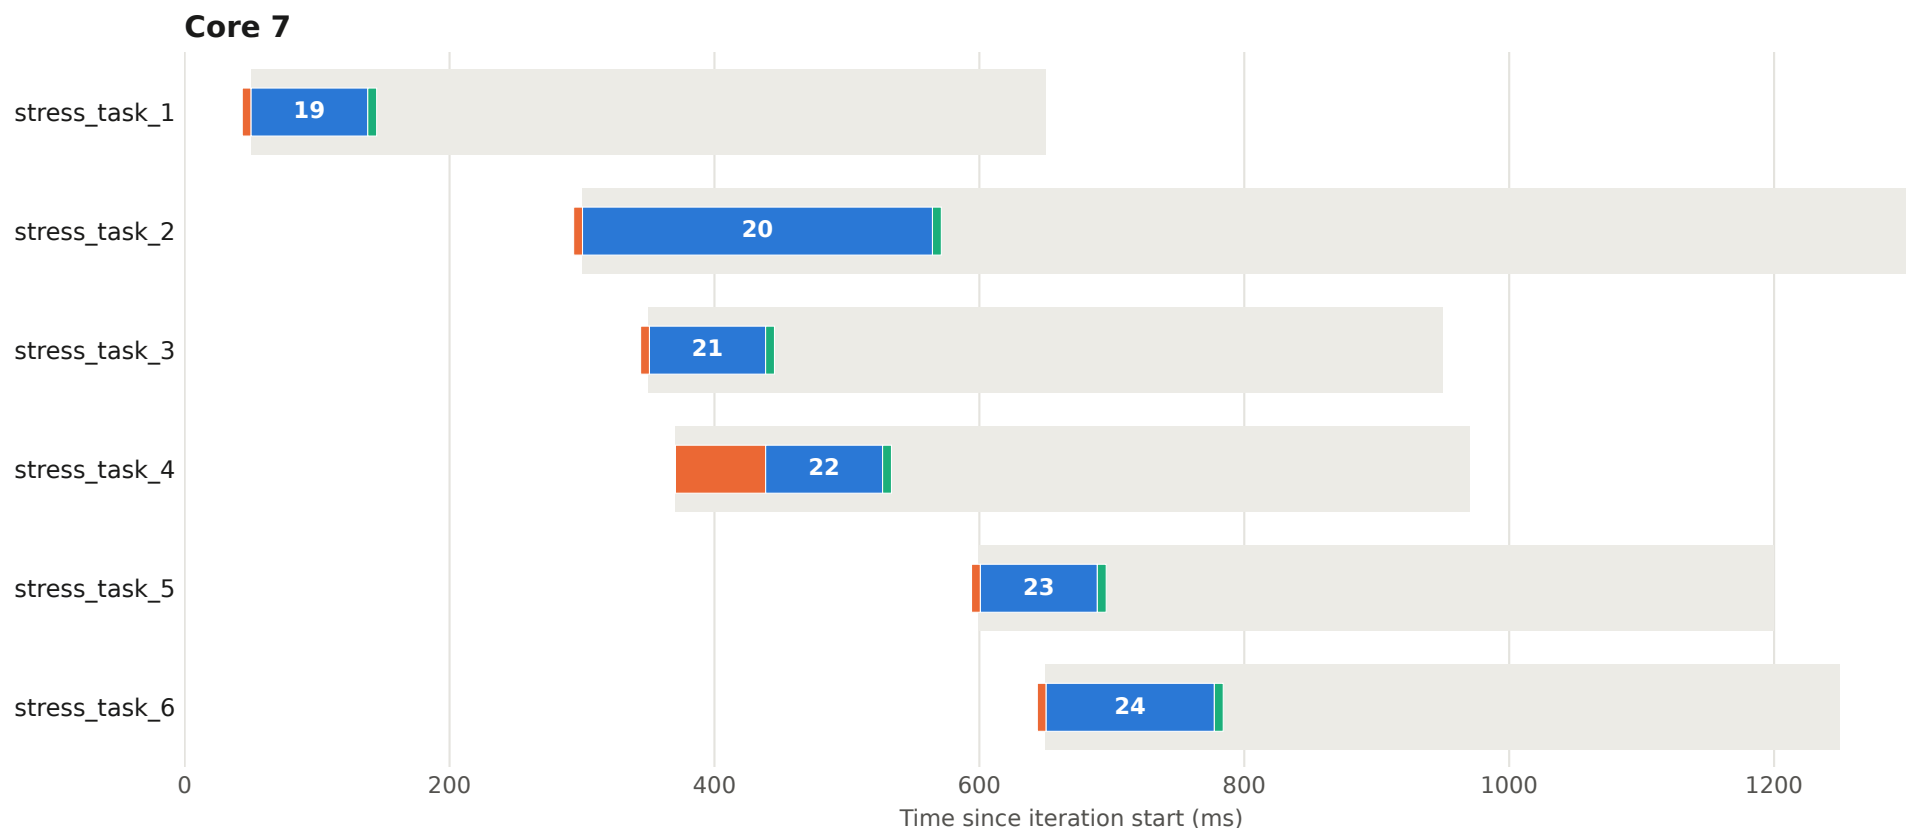


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 82 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

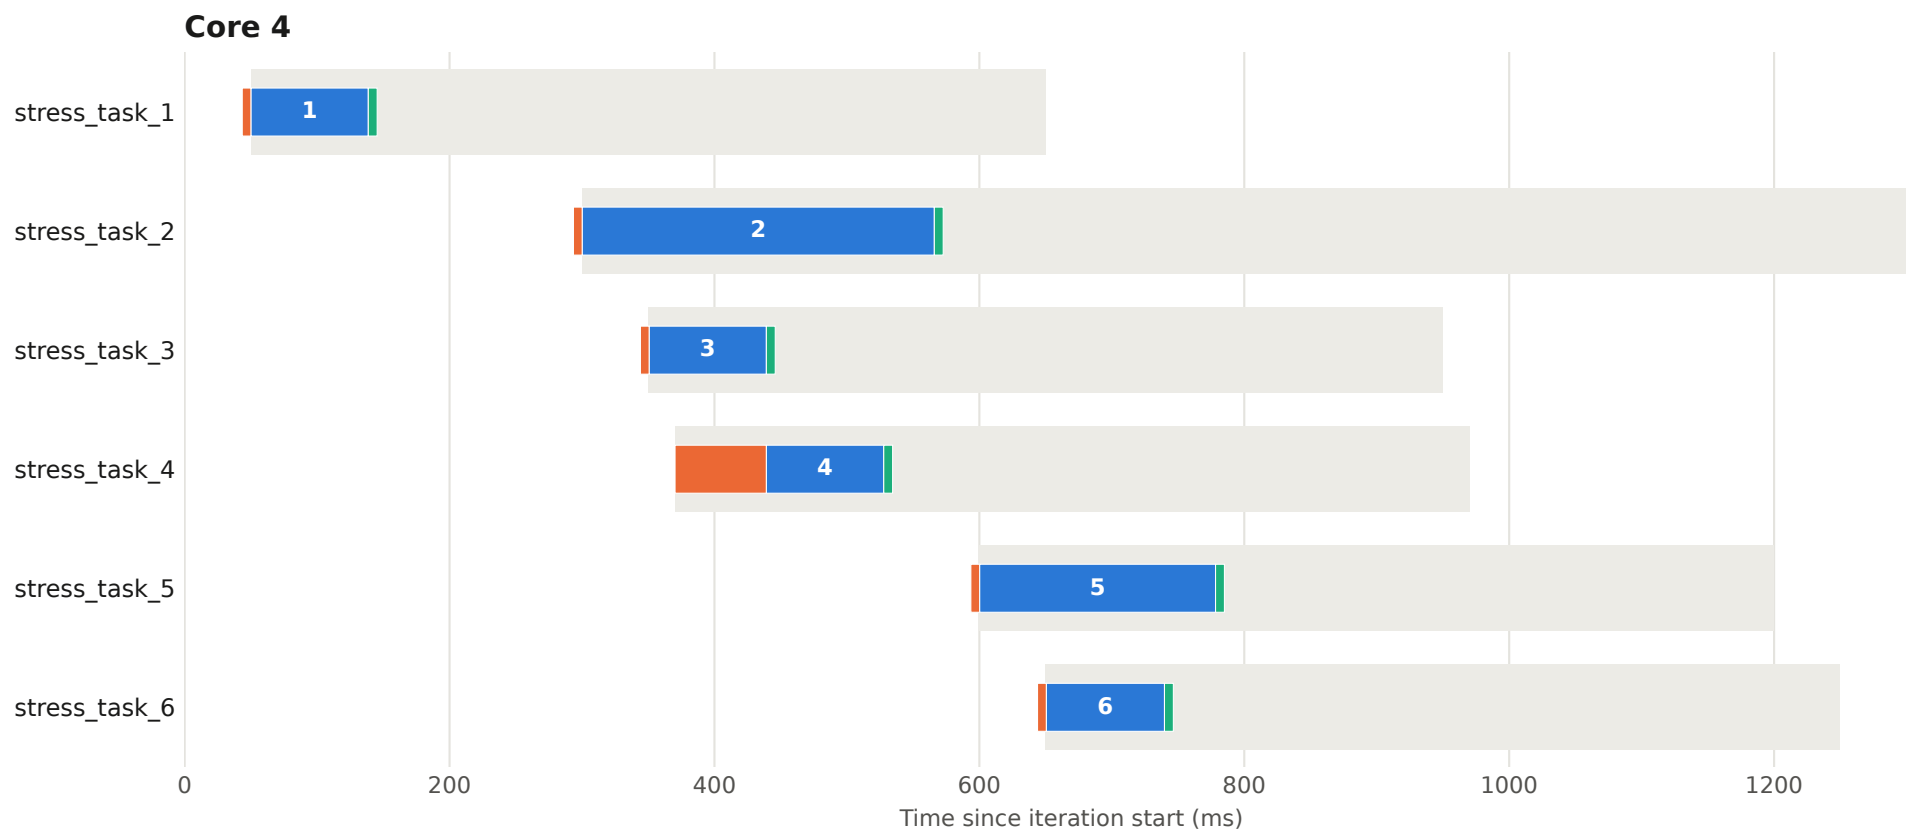


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 82 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

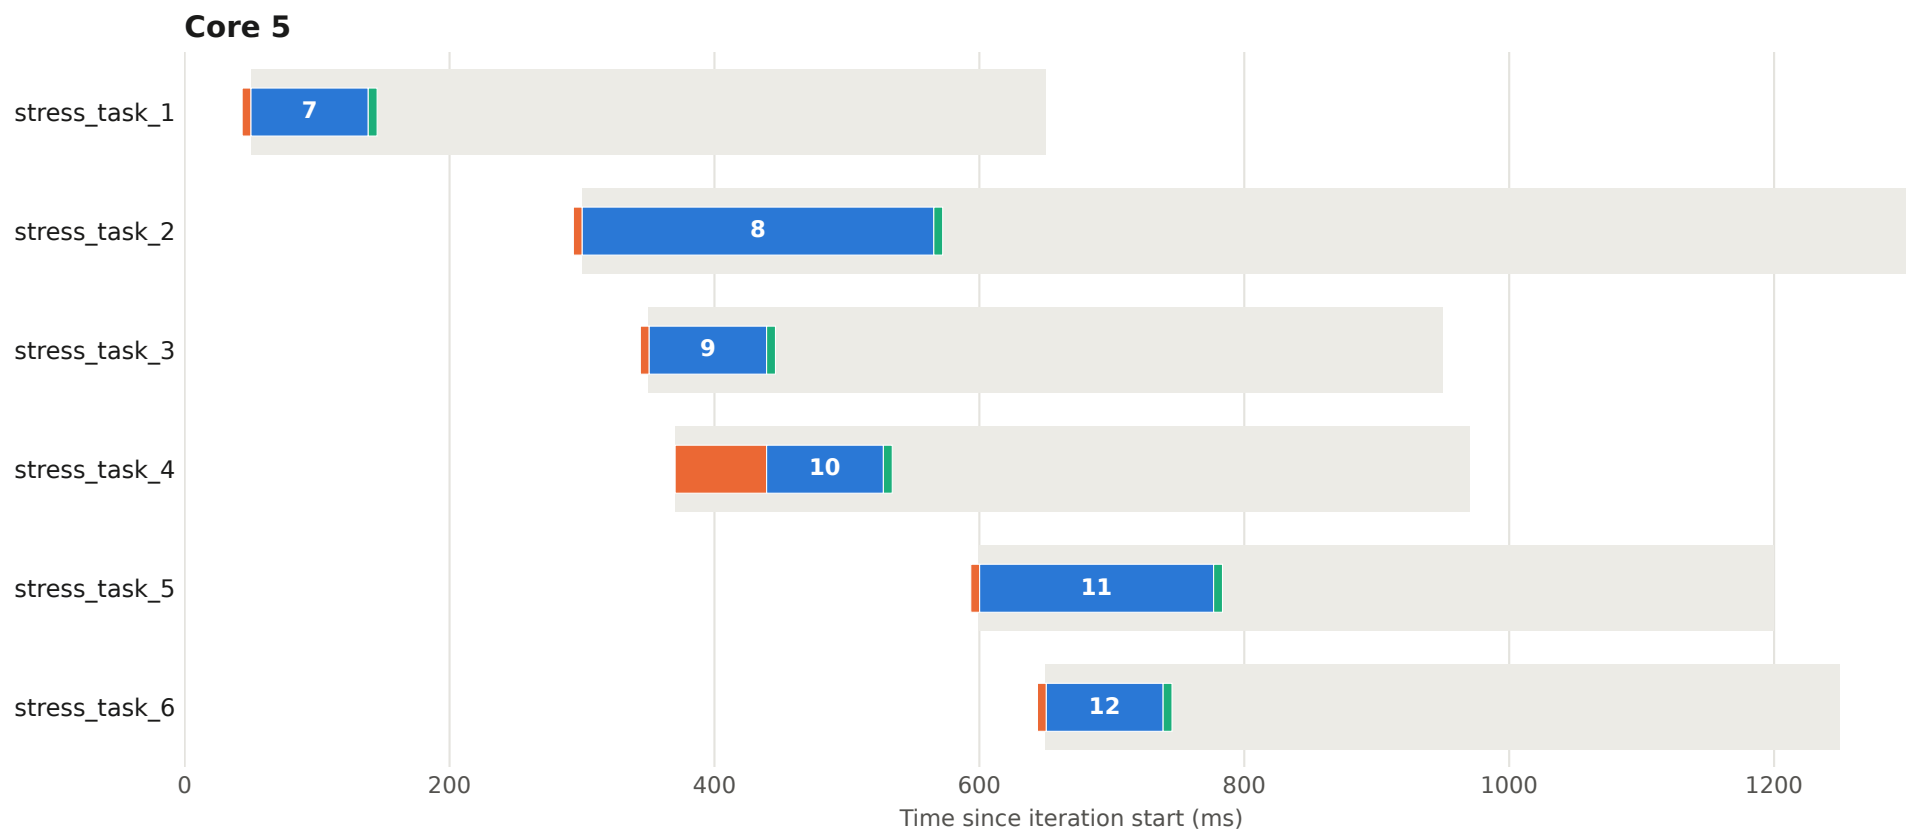


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 82 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

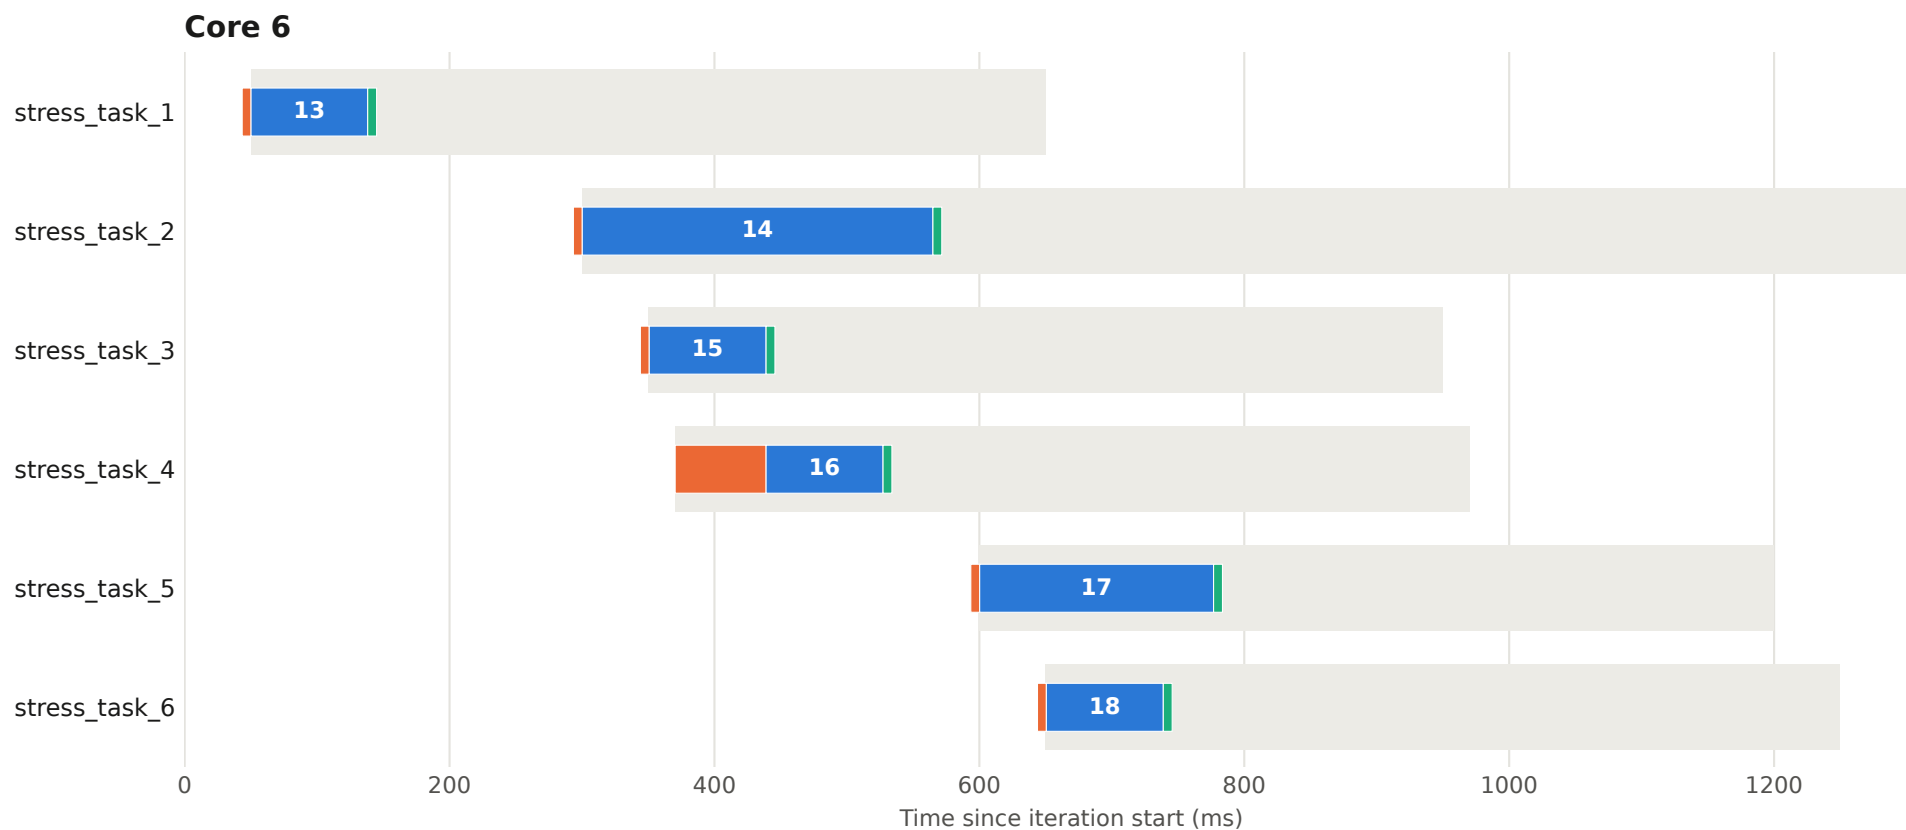


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 82 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

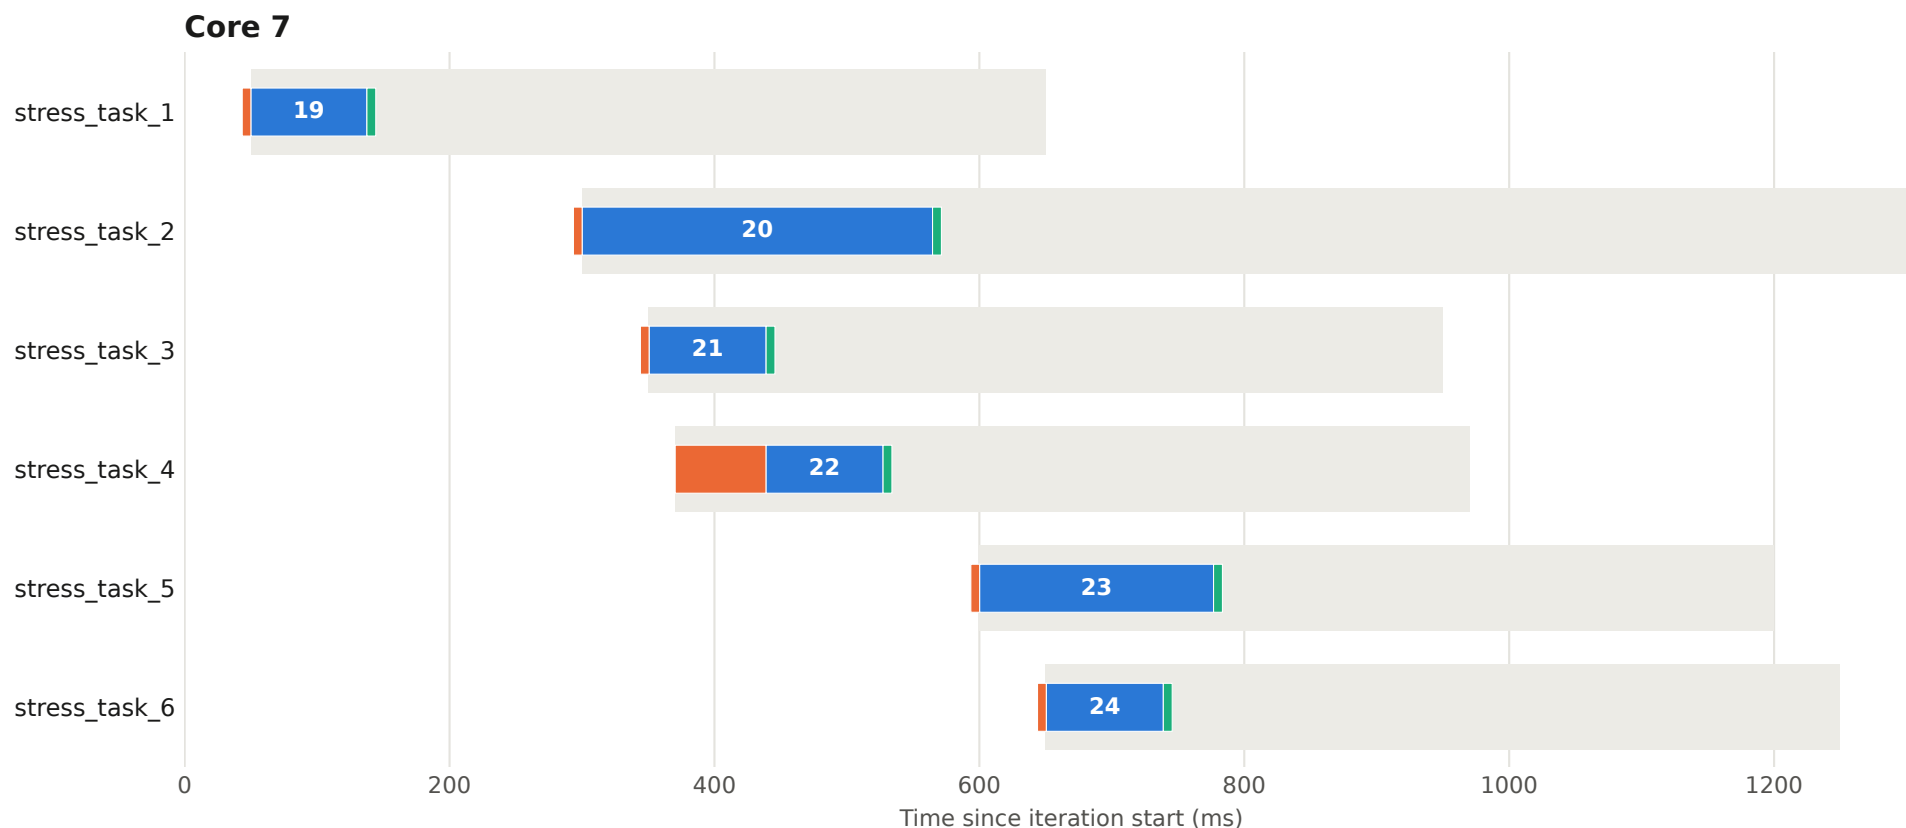


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 83 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

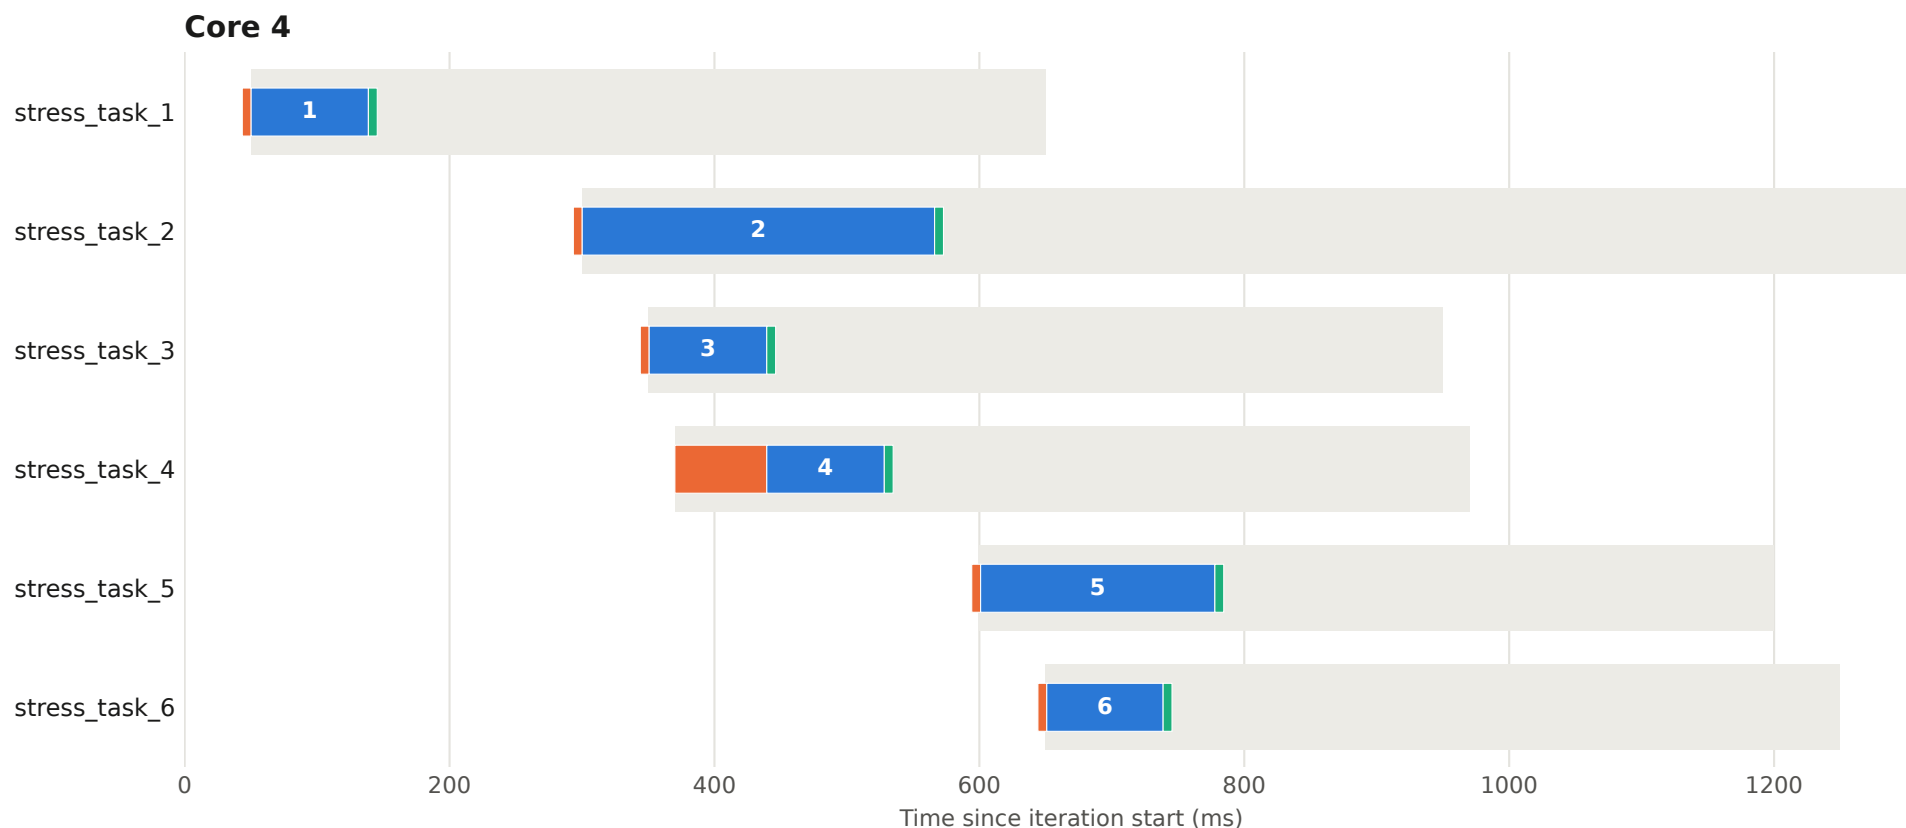


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 83 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

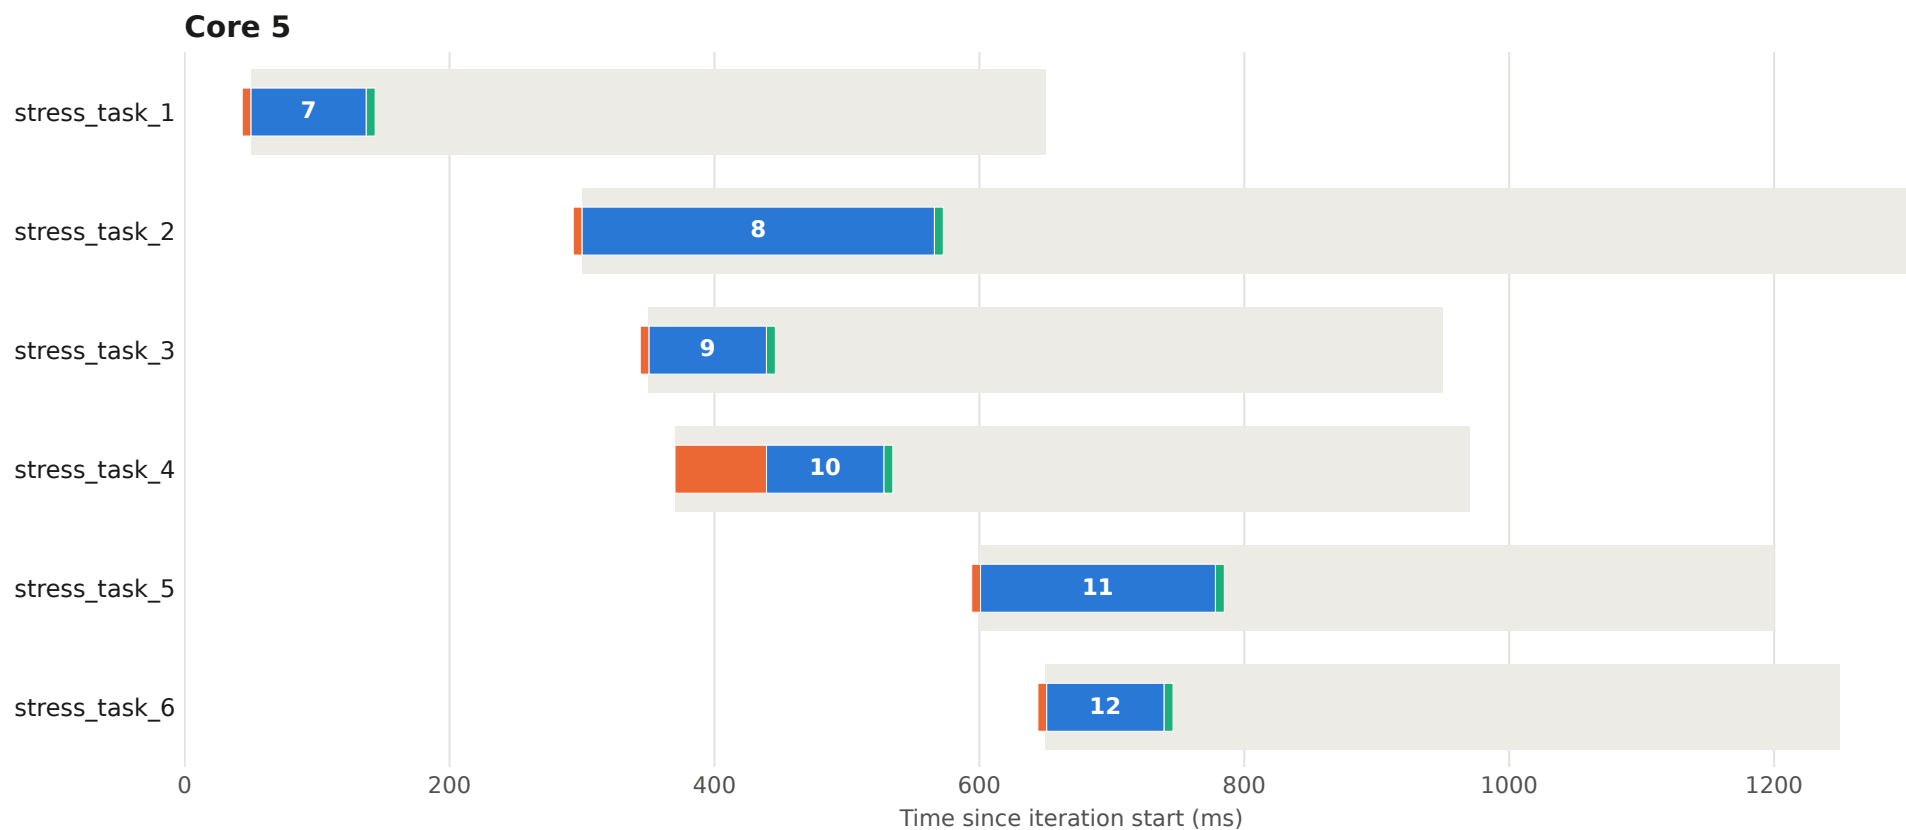


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 83 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

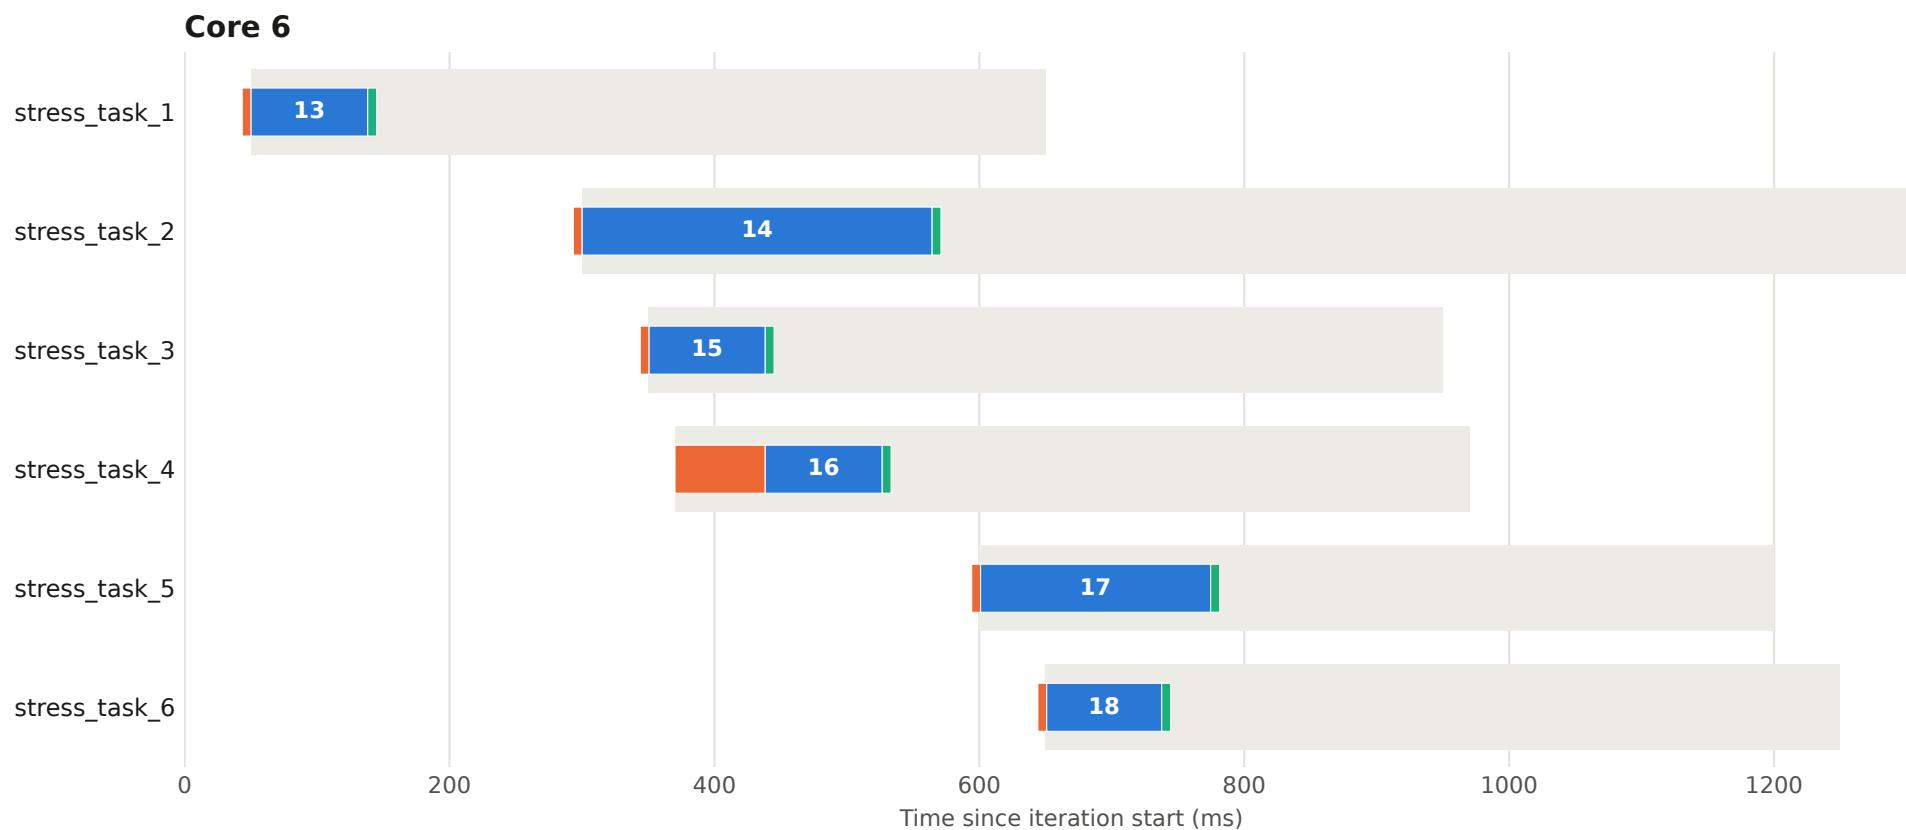


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 83 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

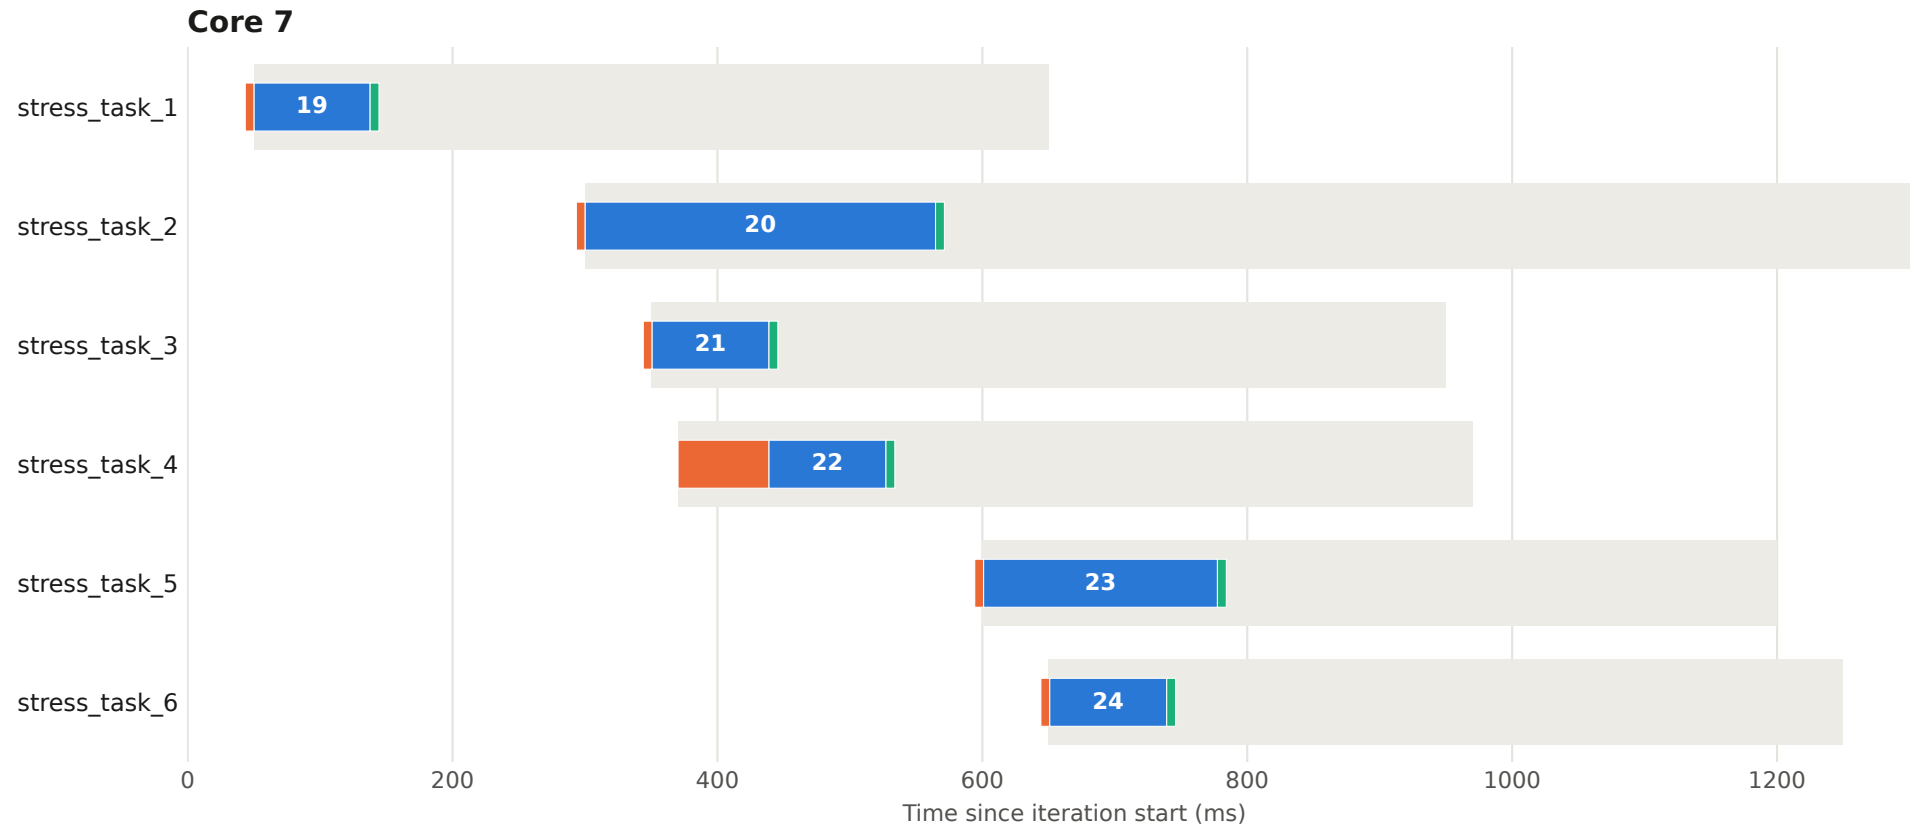


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 84 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

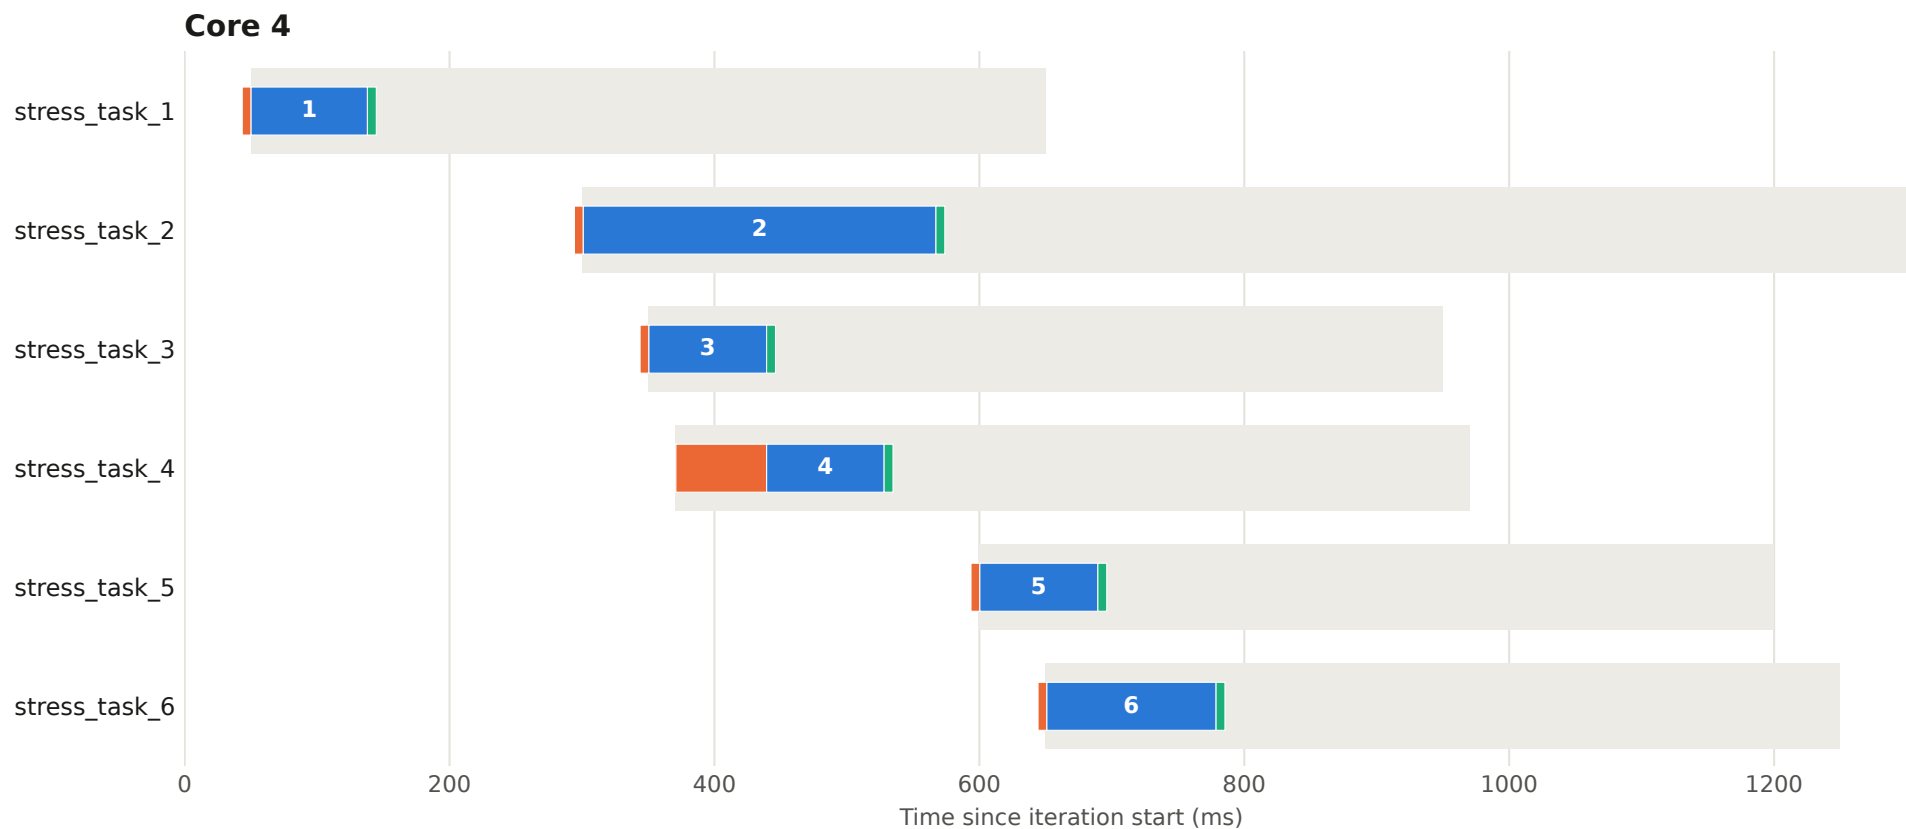


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 84 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

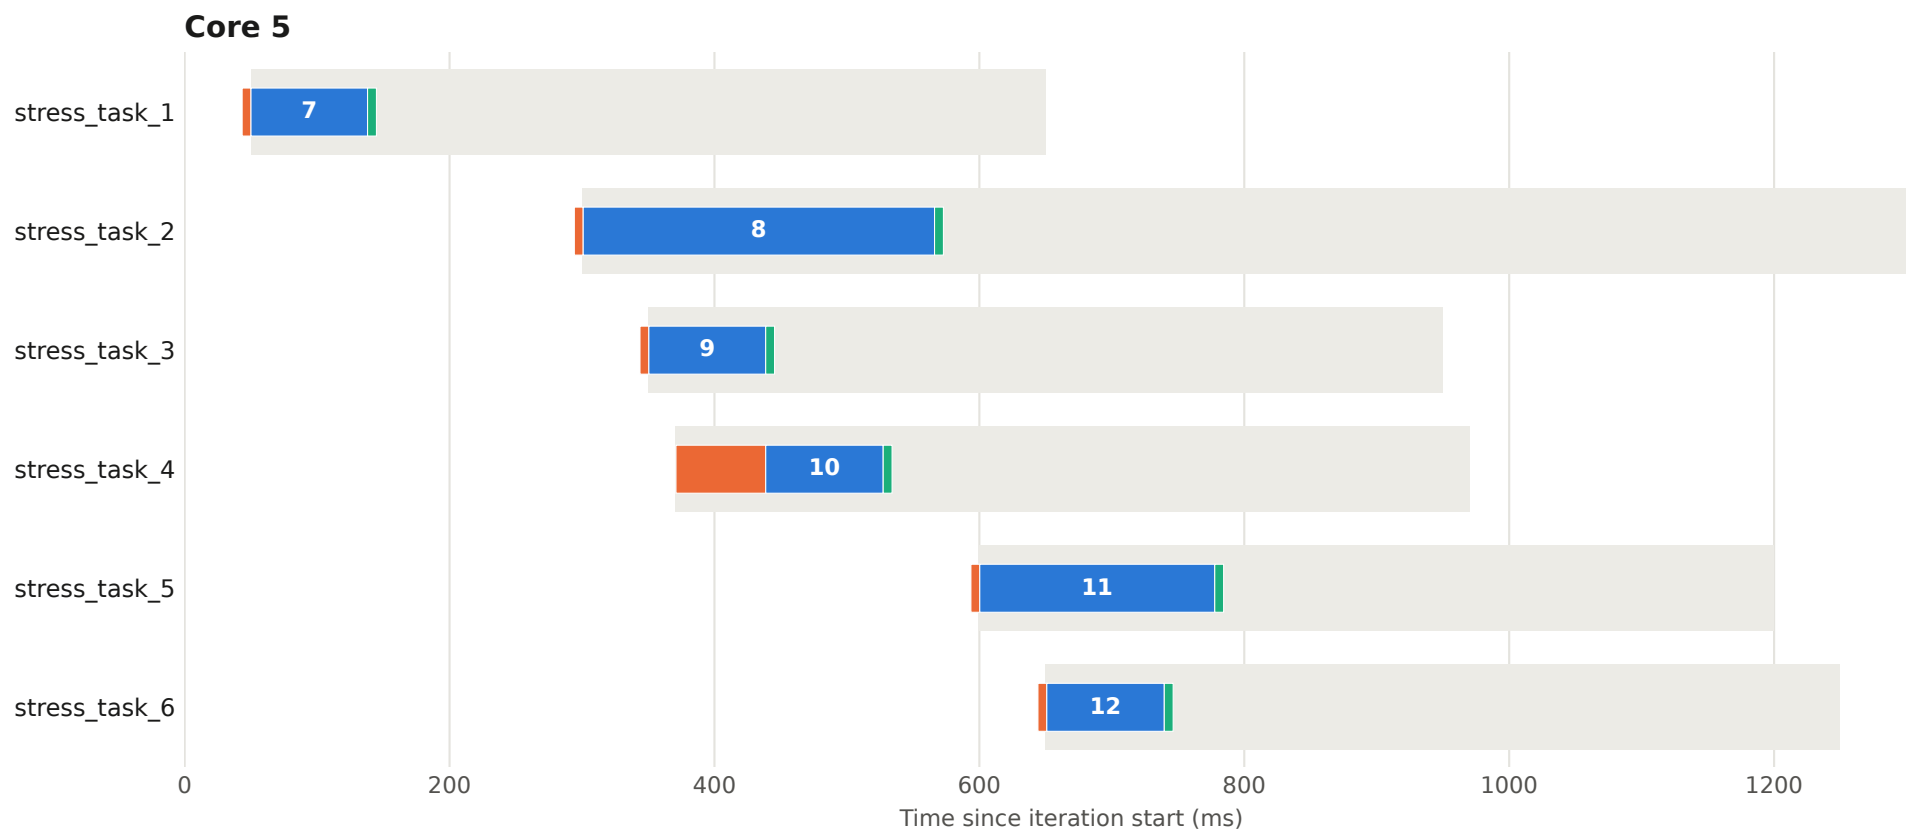


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 84 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

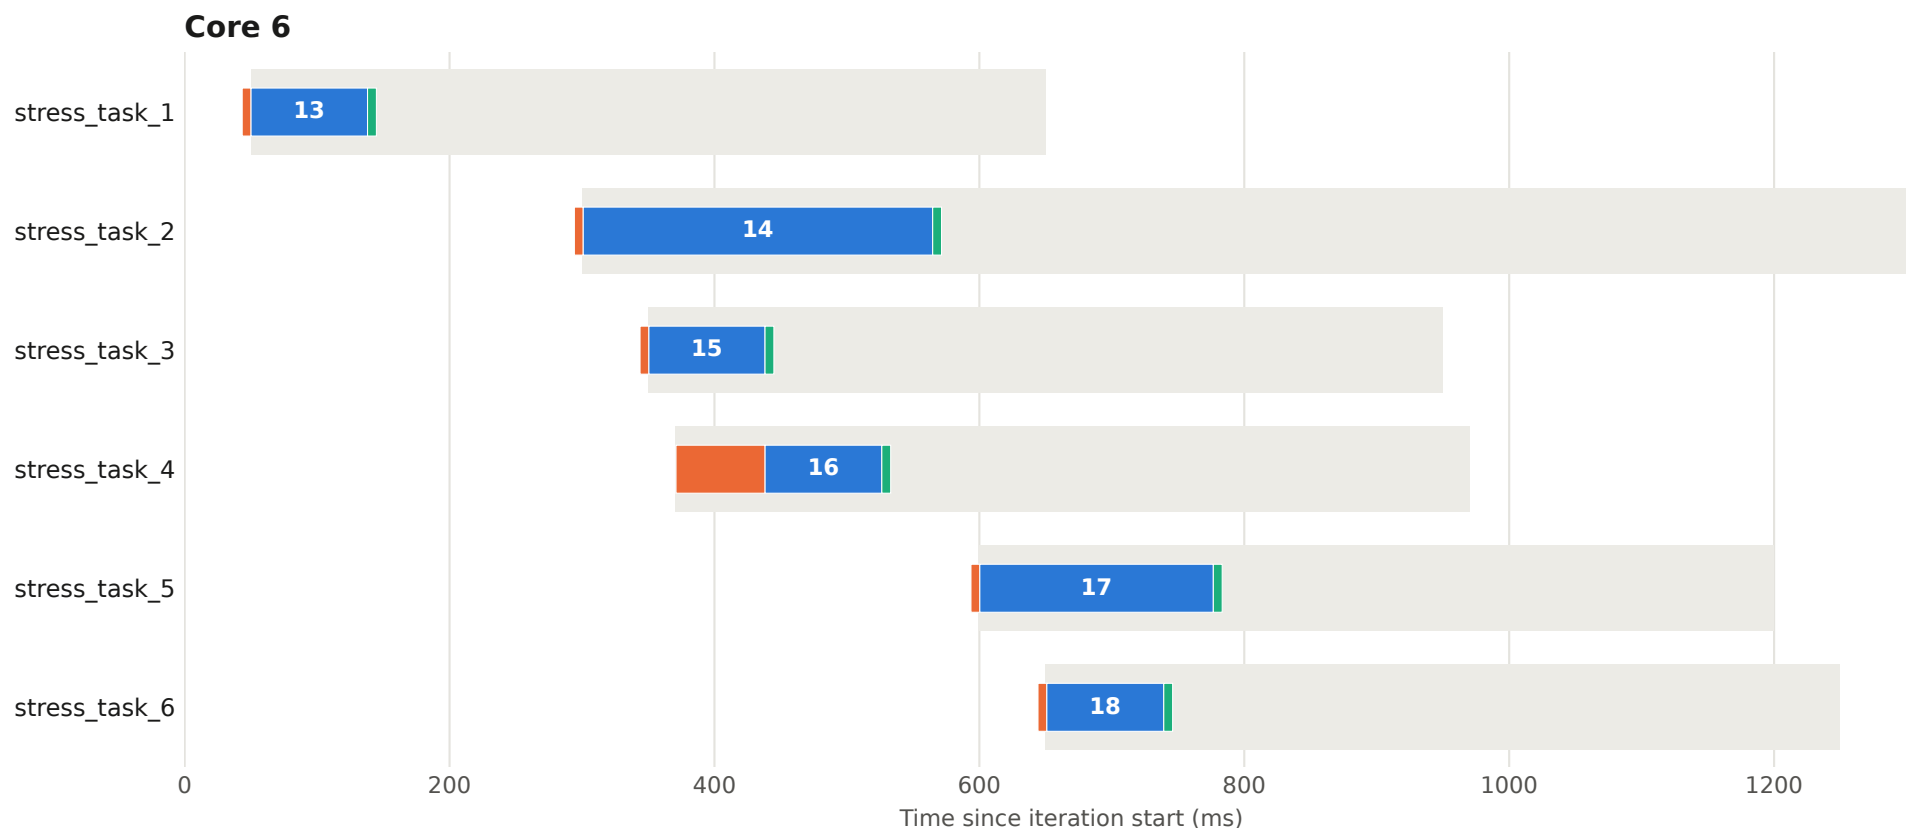


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 84 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

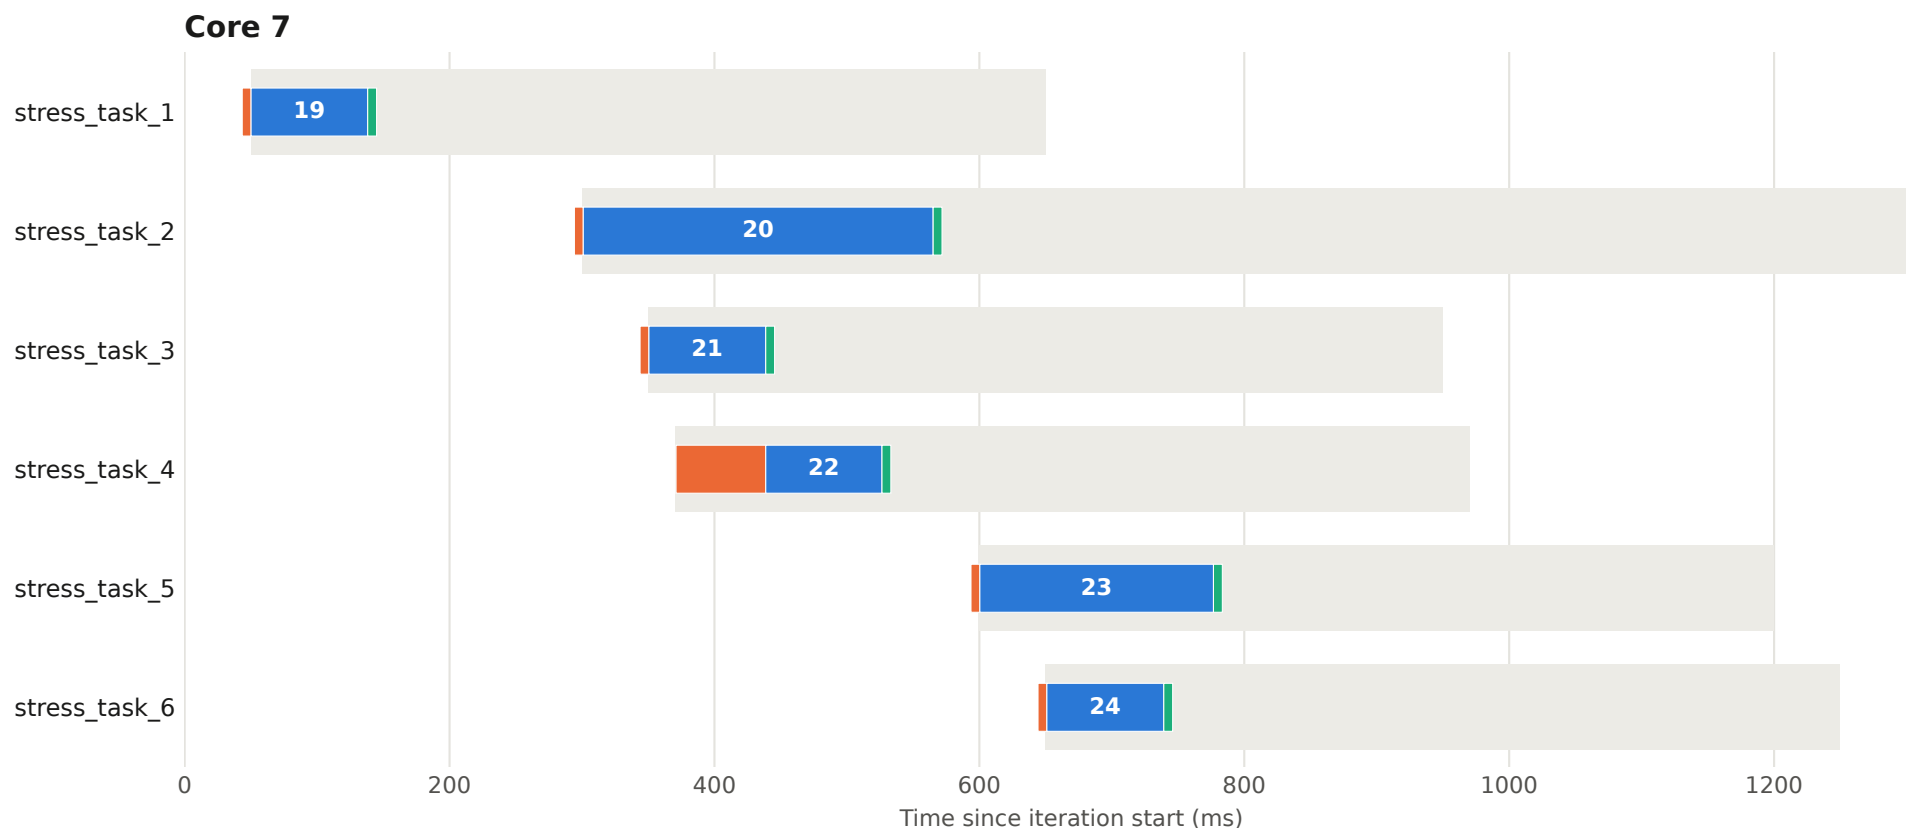


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 85 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

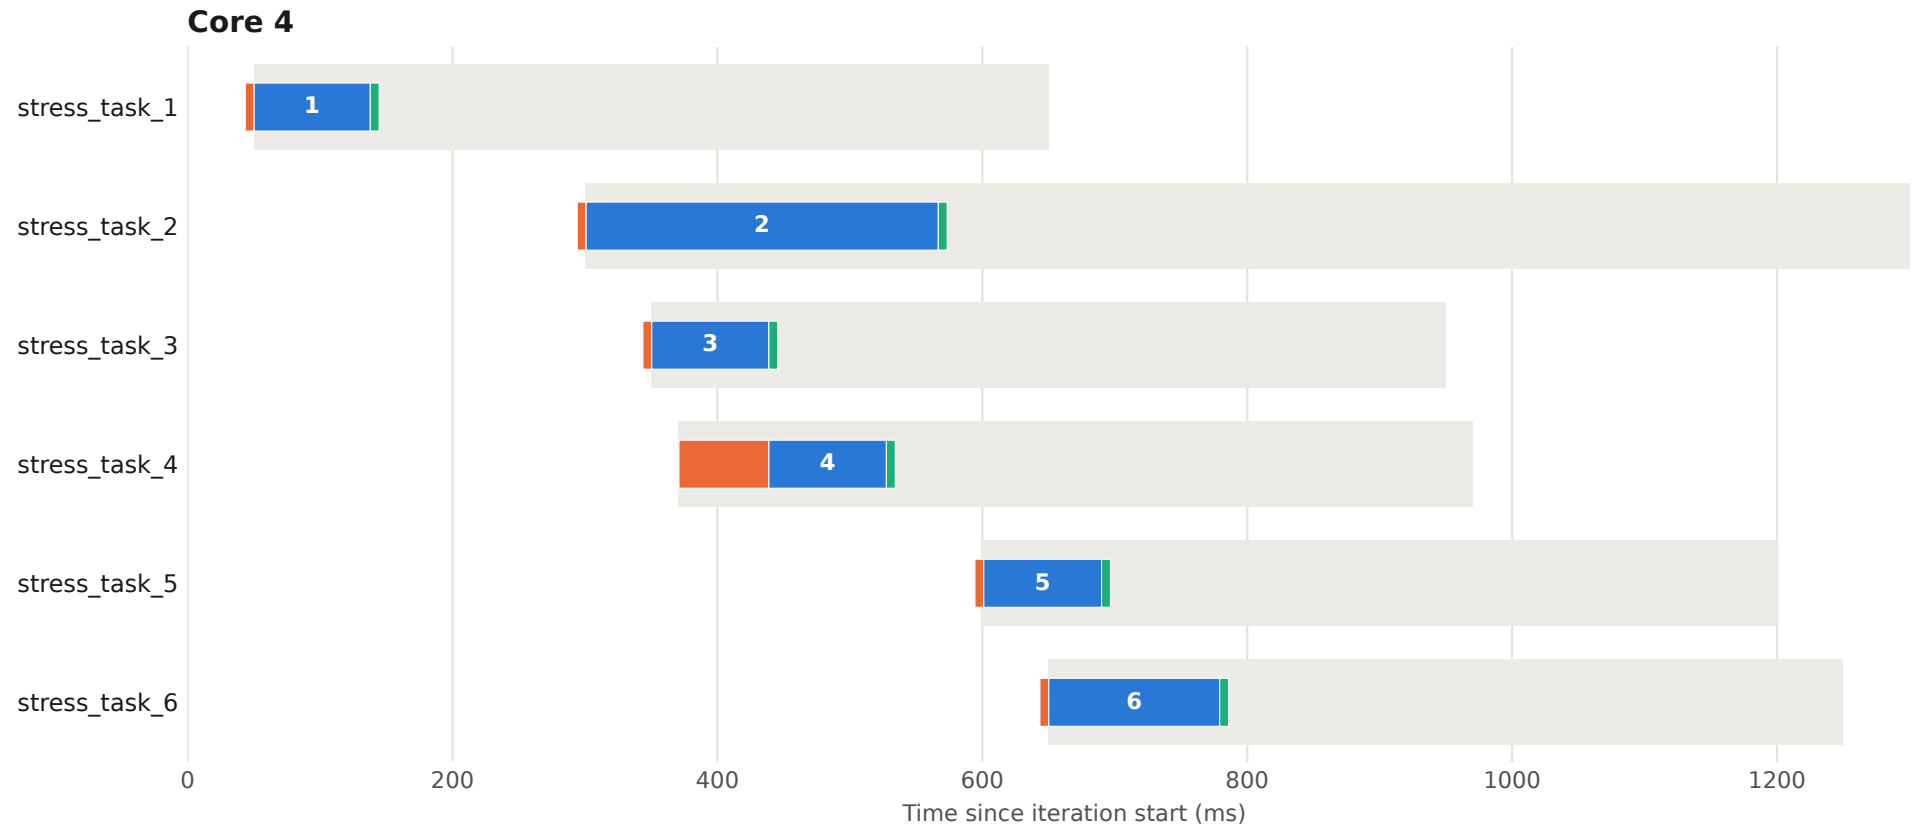


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 85 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

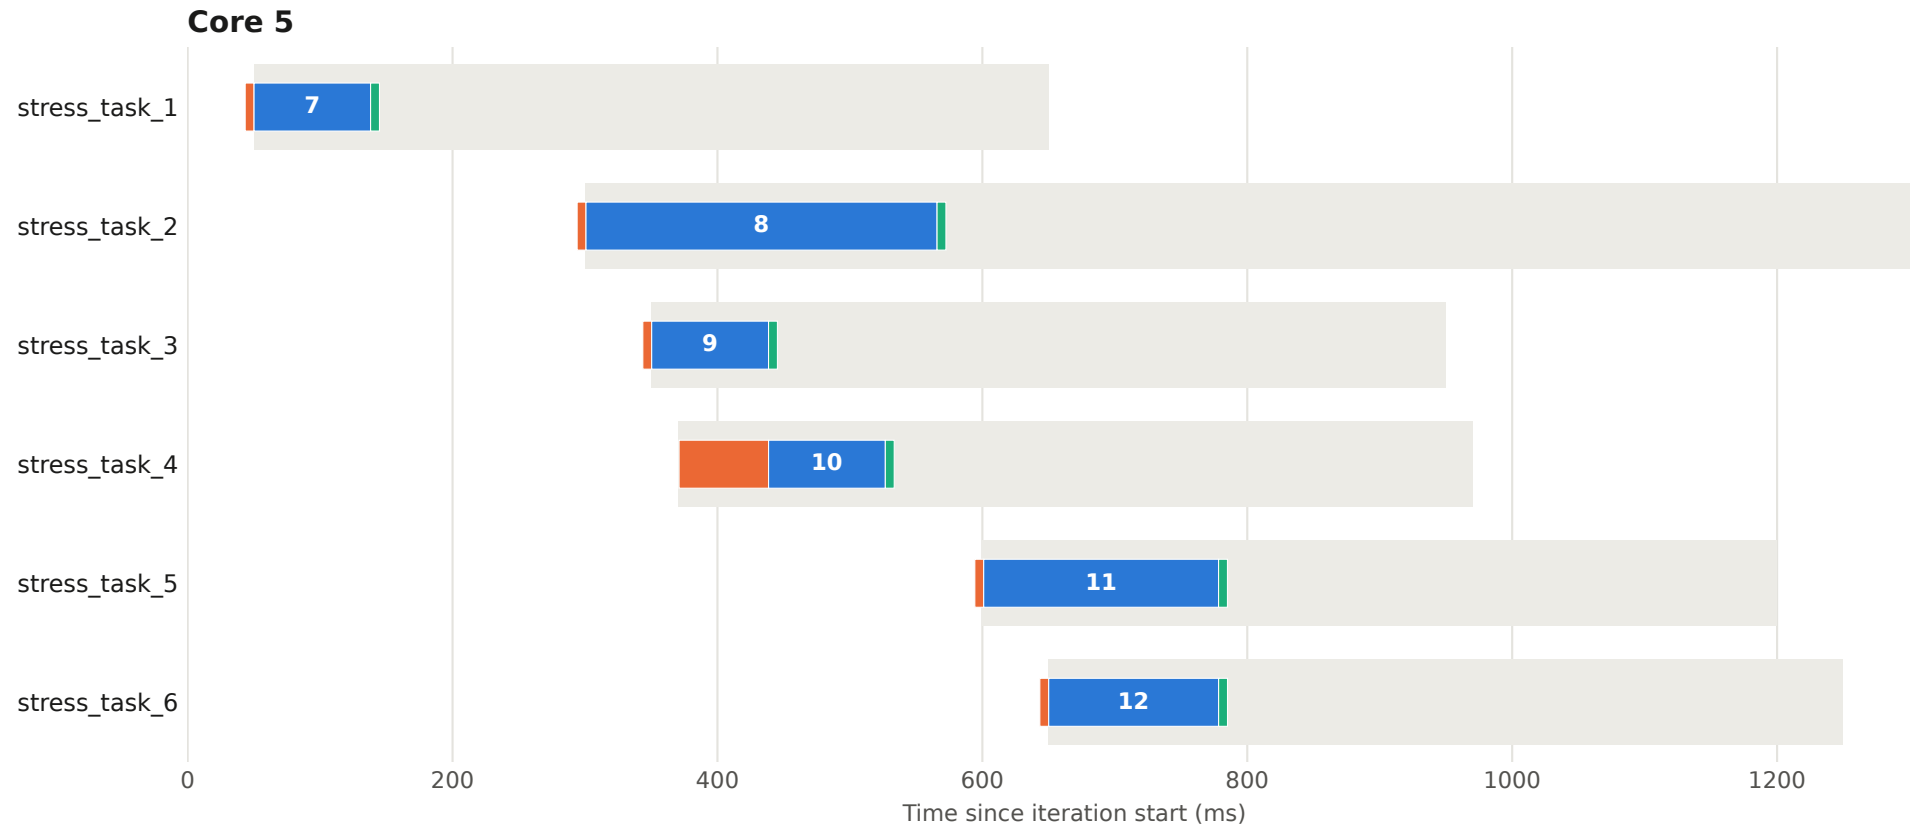


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 85 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

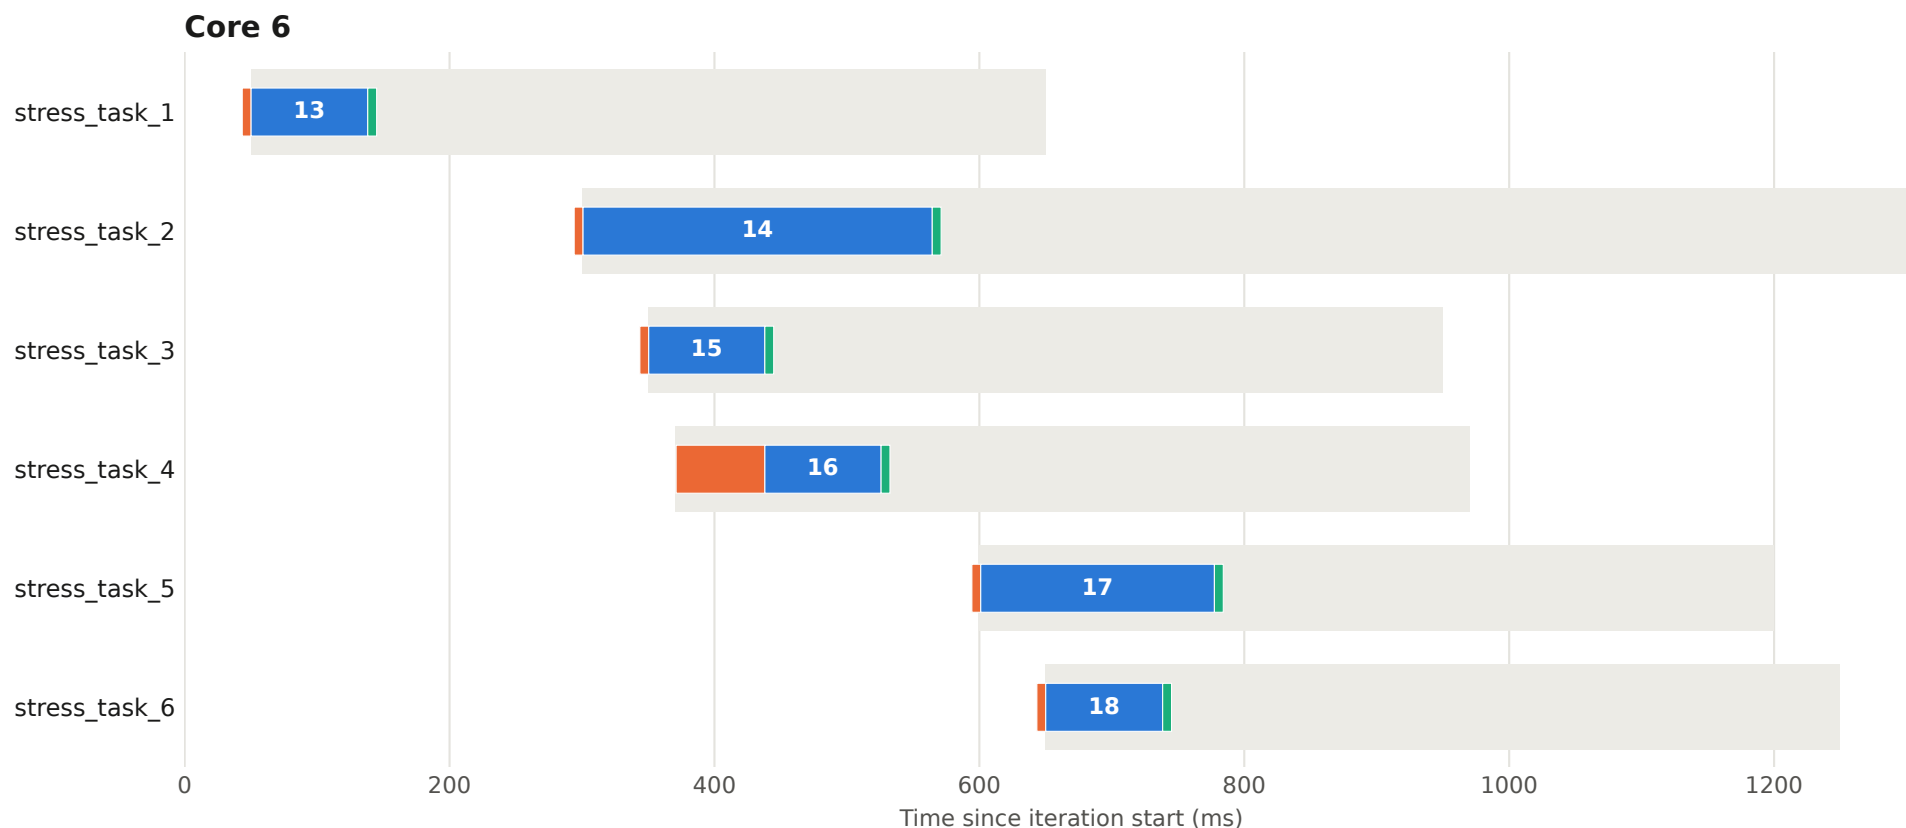


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 85 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

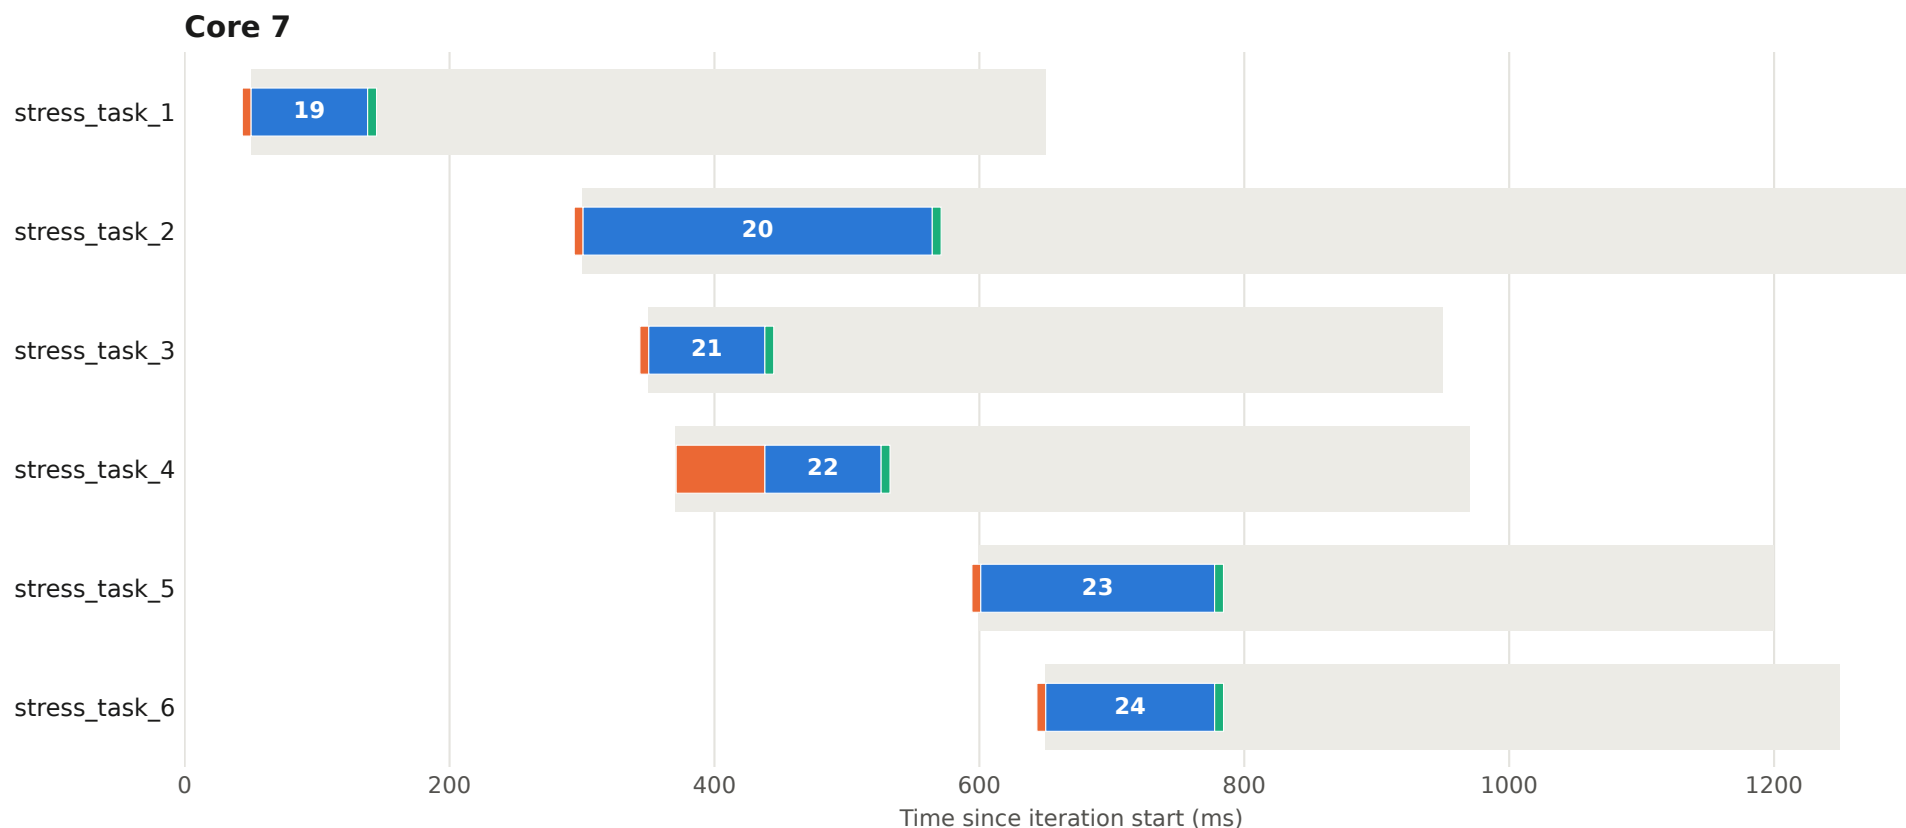


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 86 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

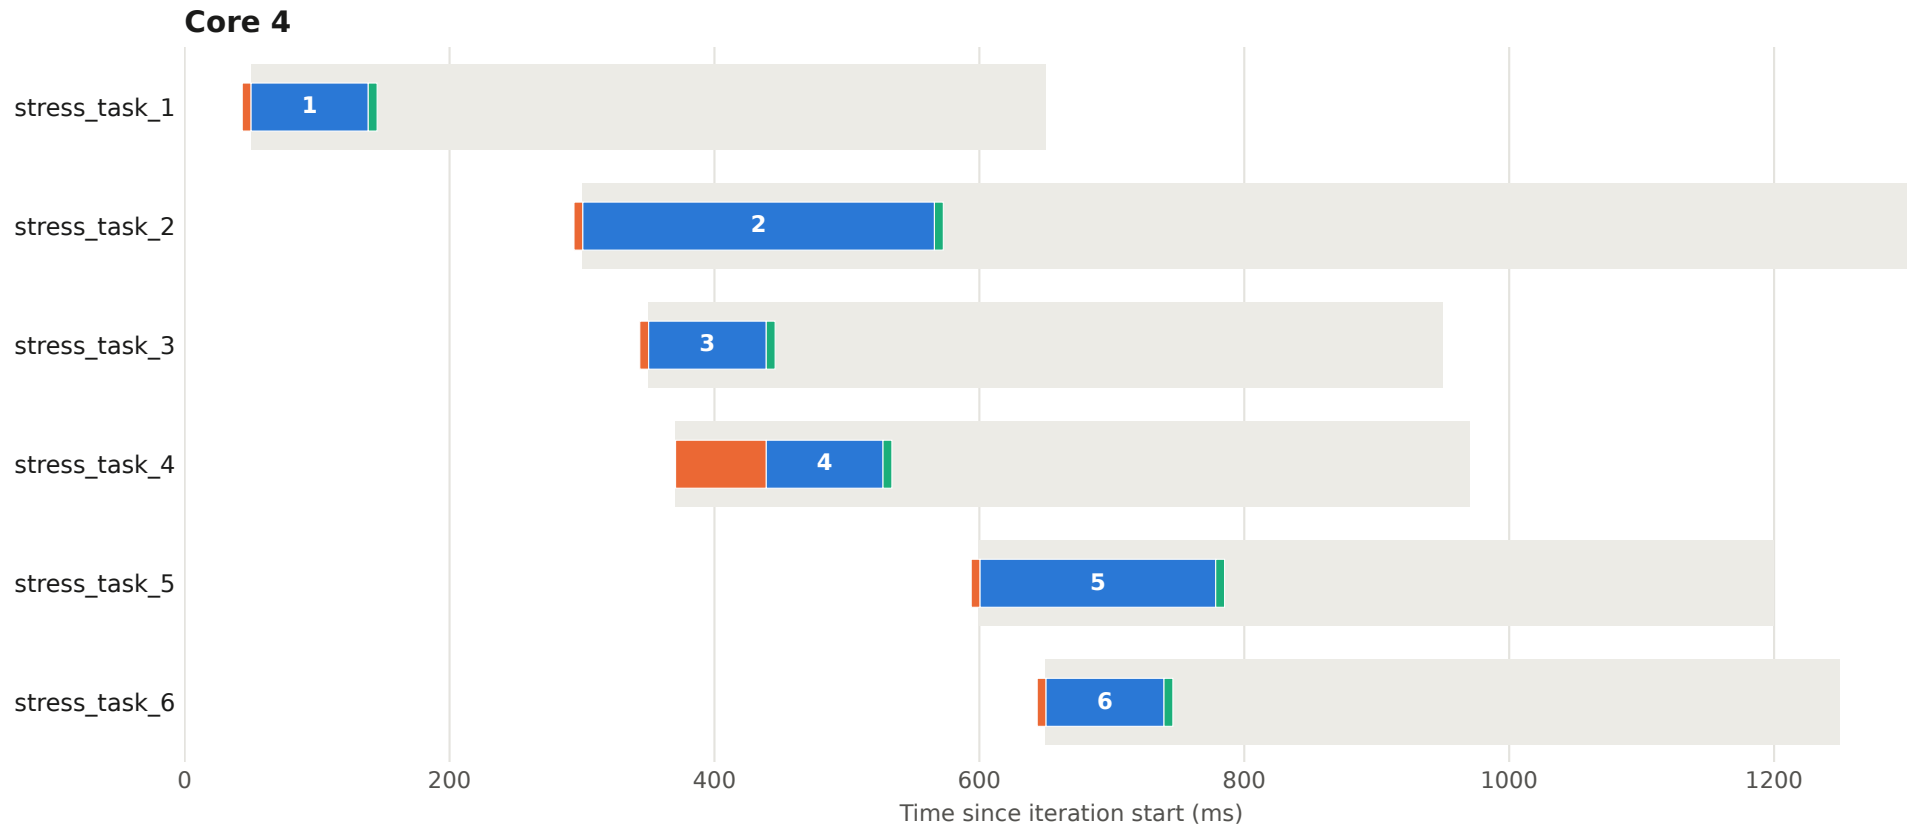


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 86 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

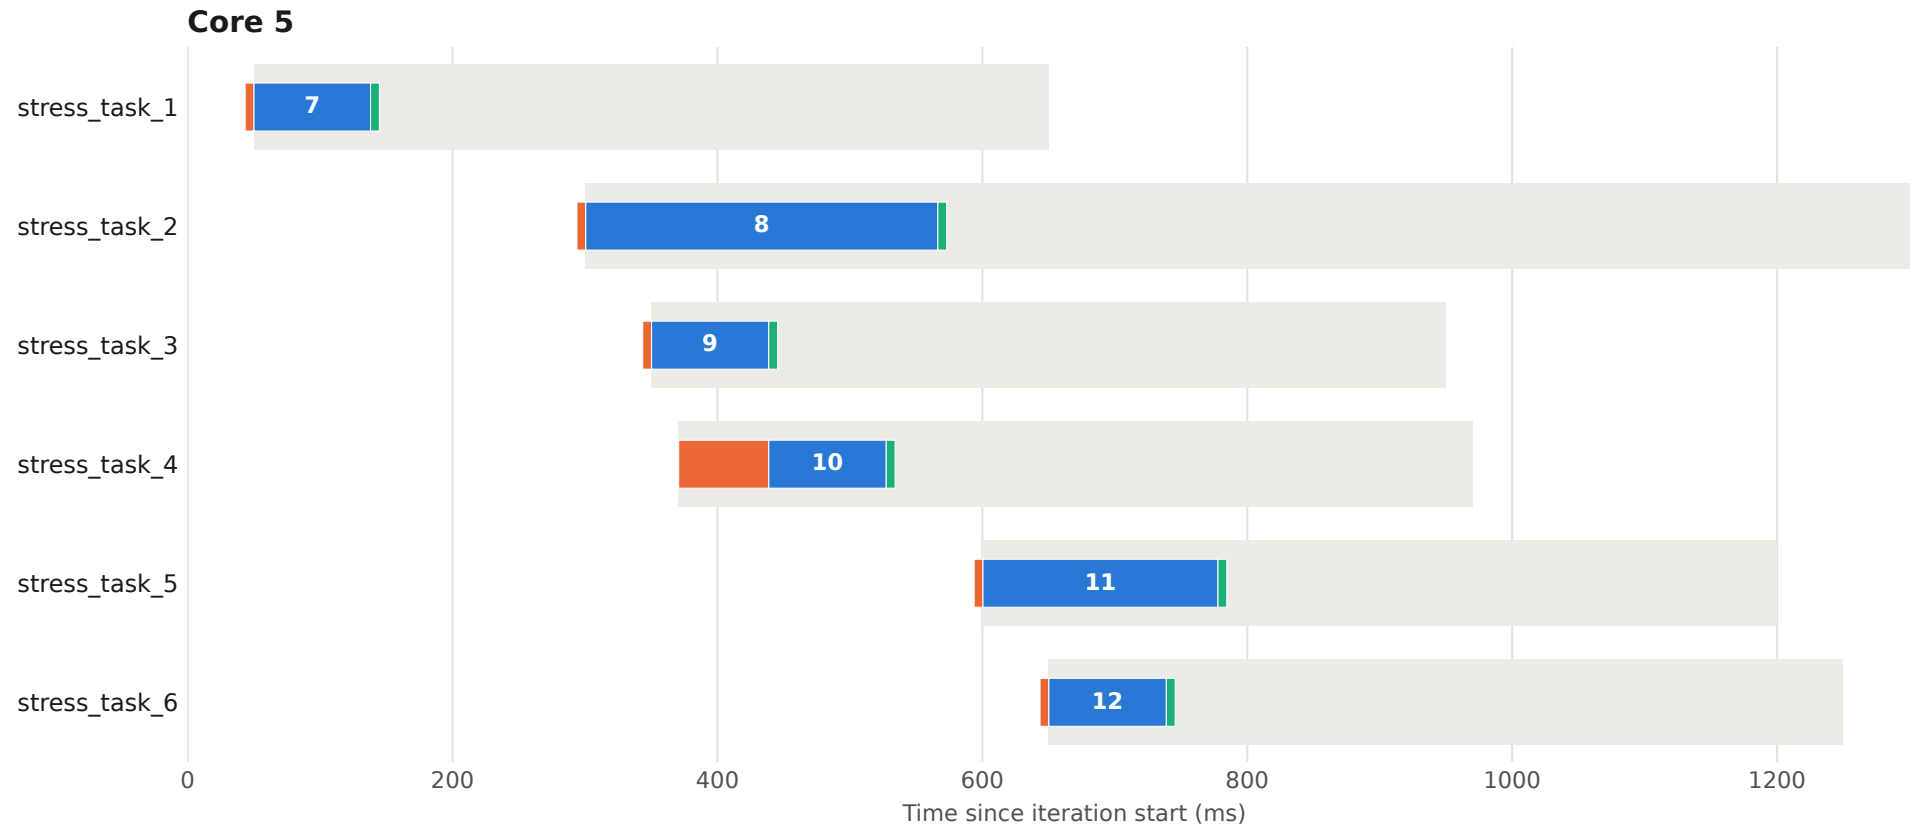


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 86 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

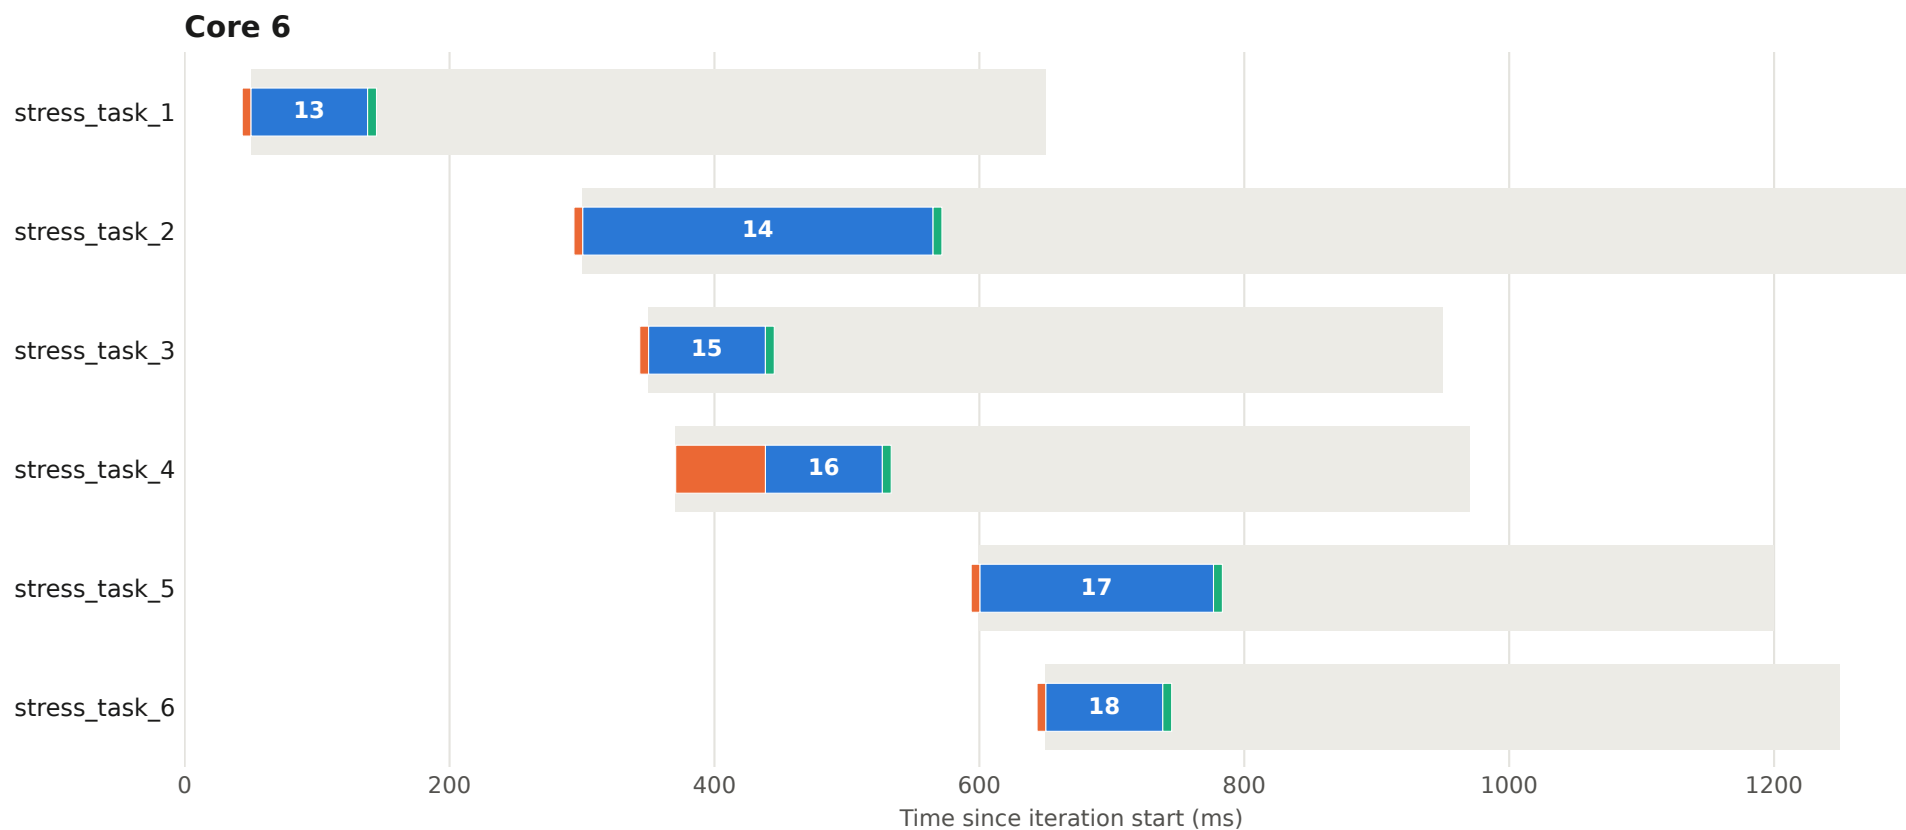


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 86 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

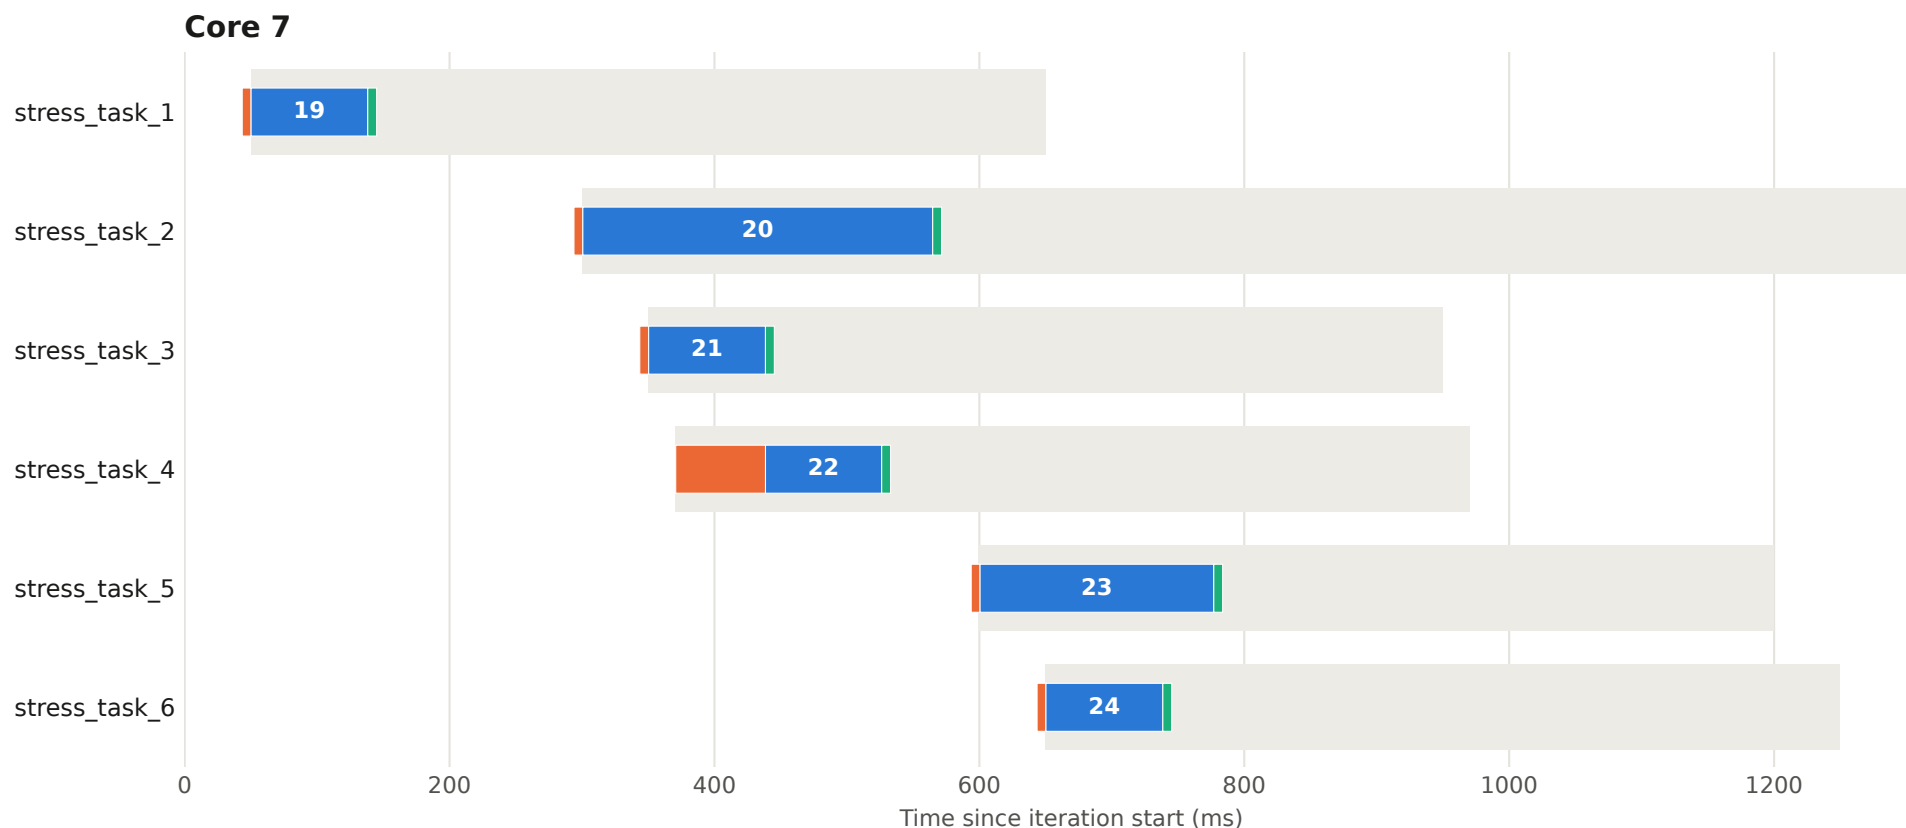


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 87 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

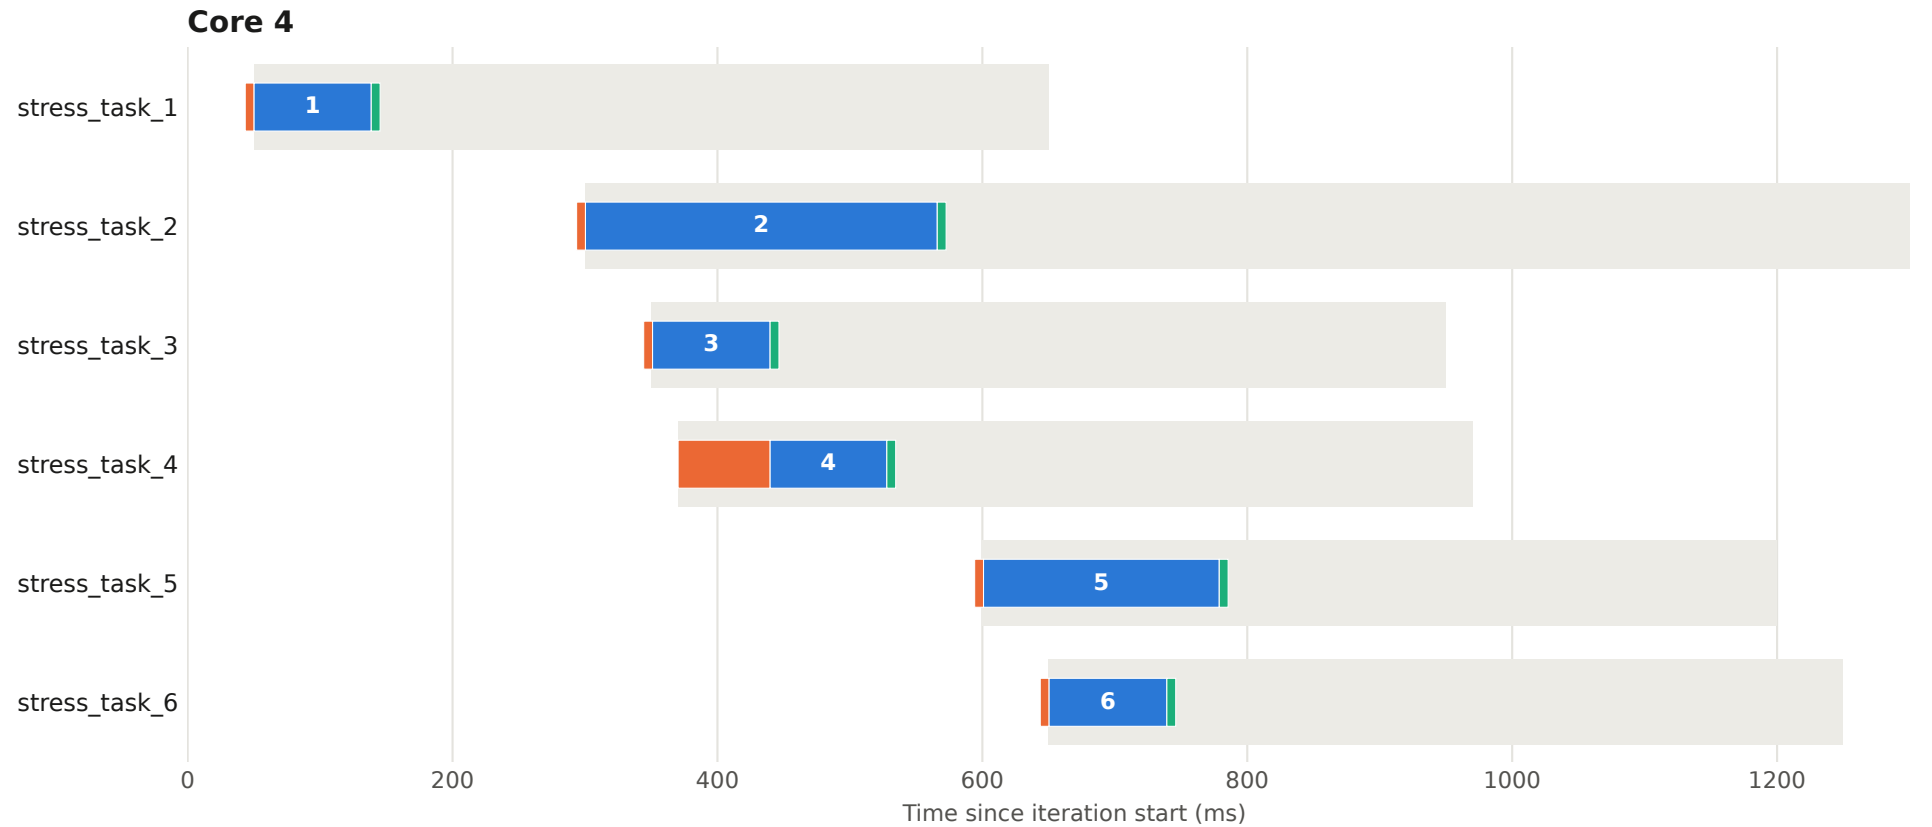


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 87 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

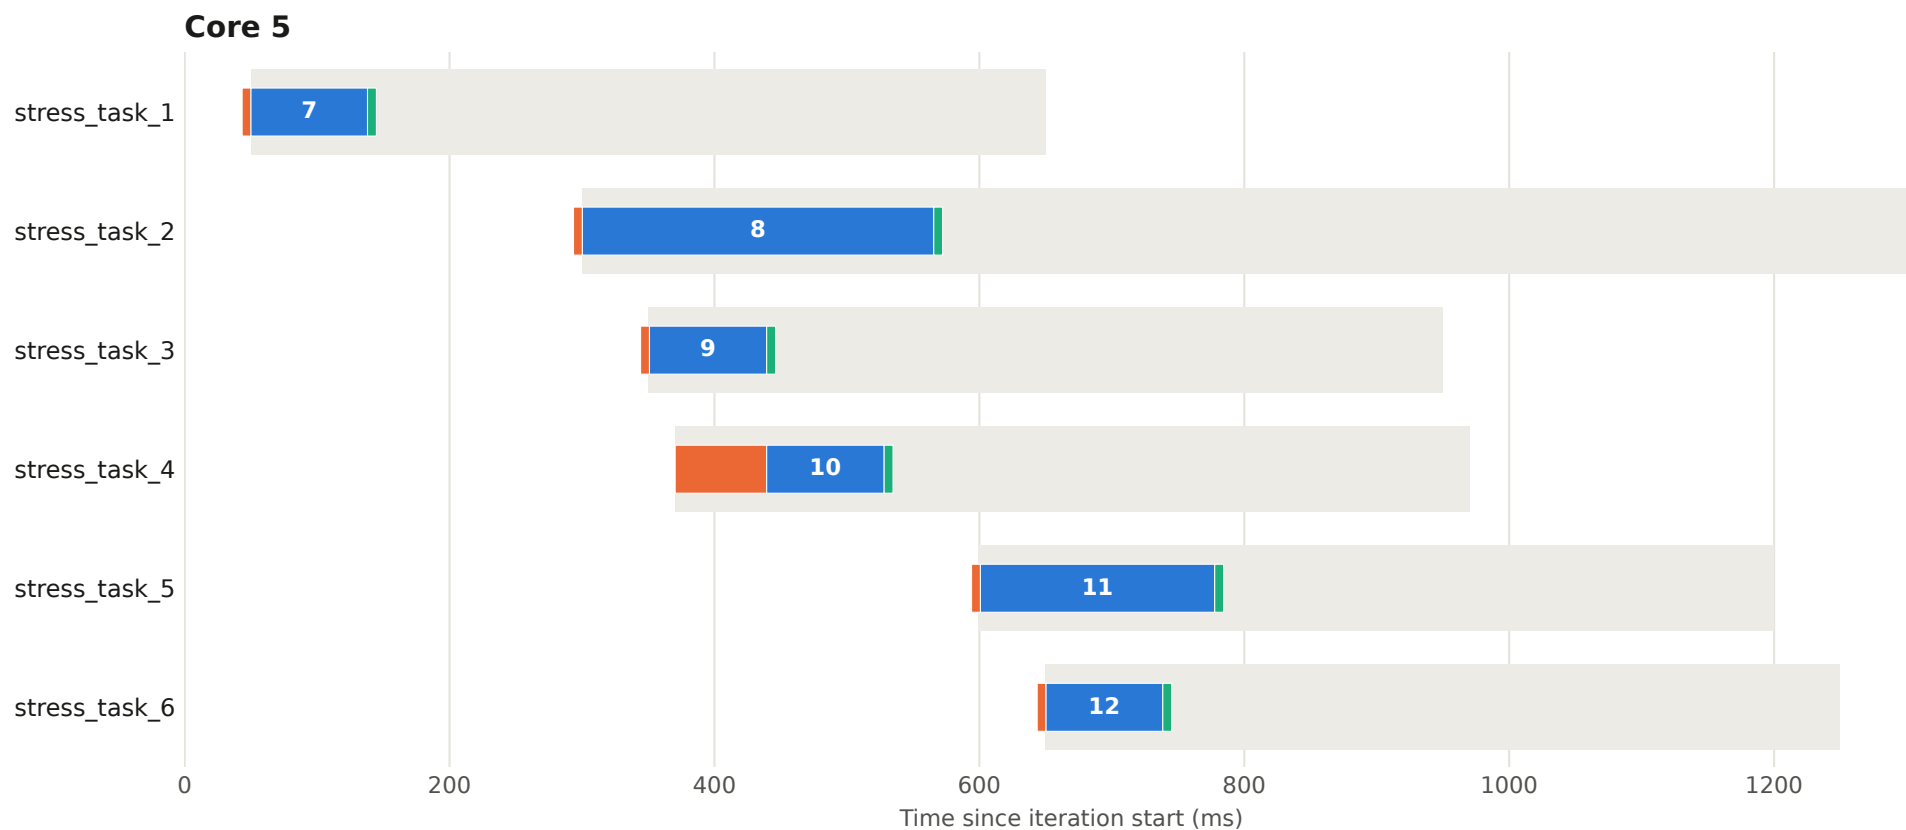


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 87 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

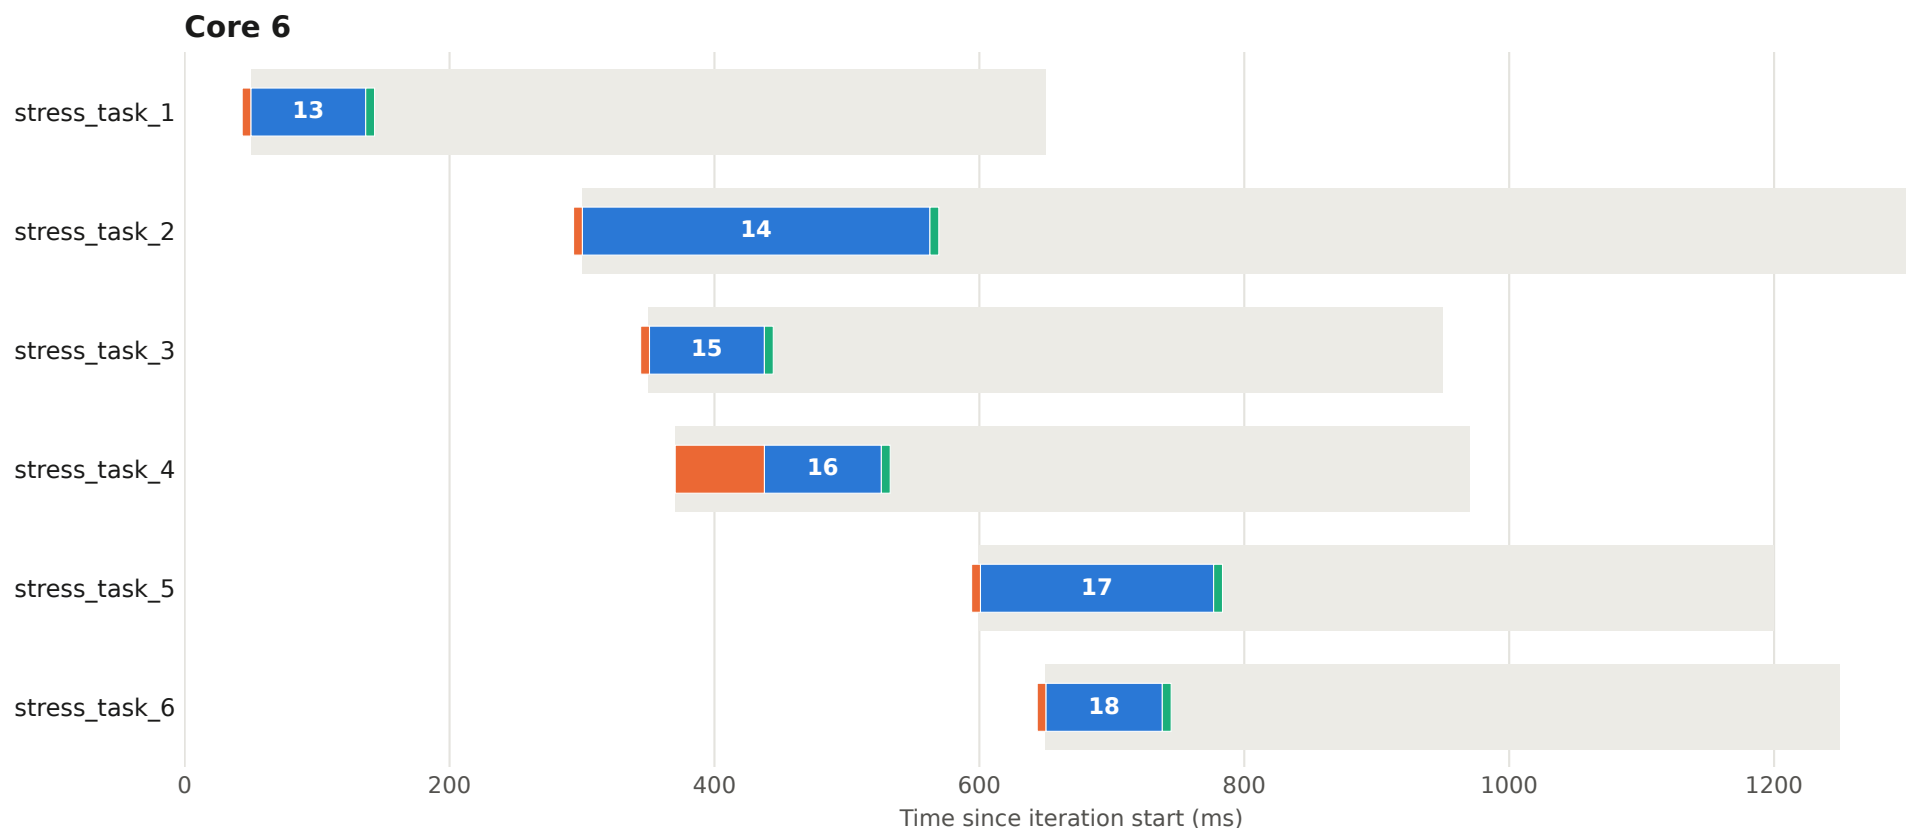


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 87 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

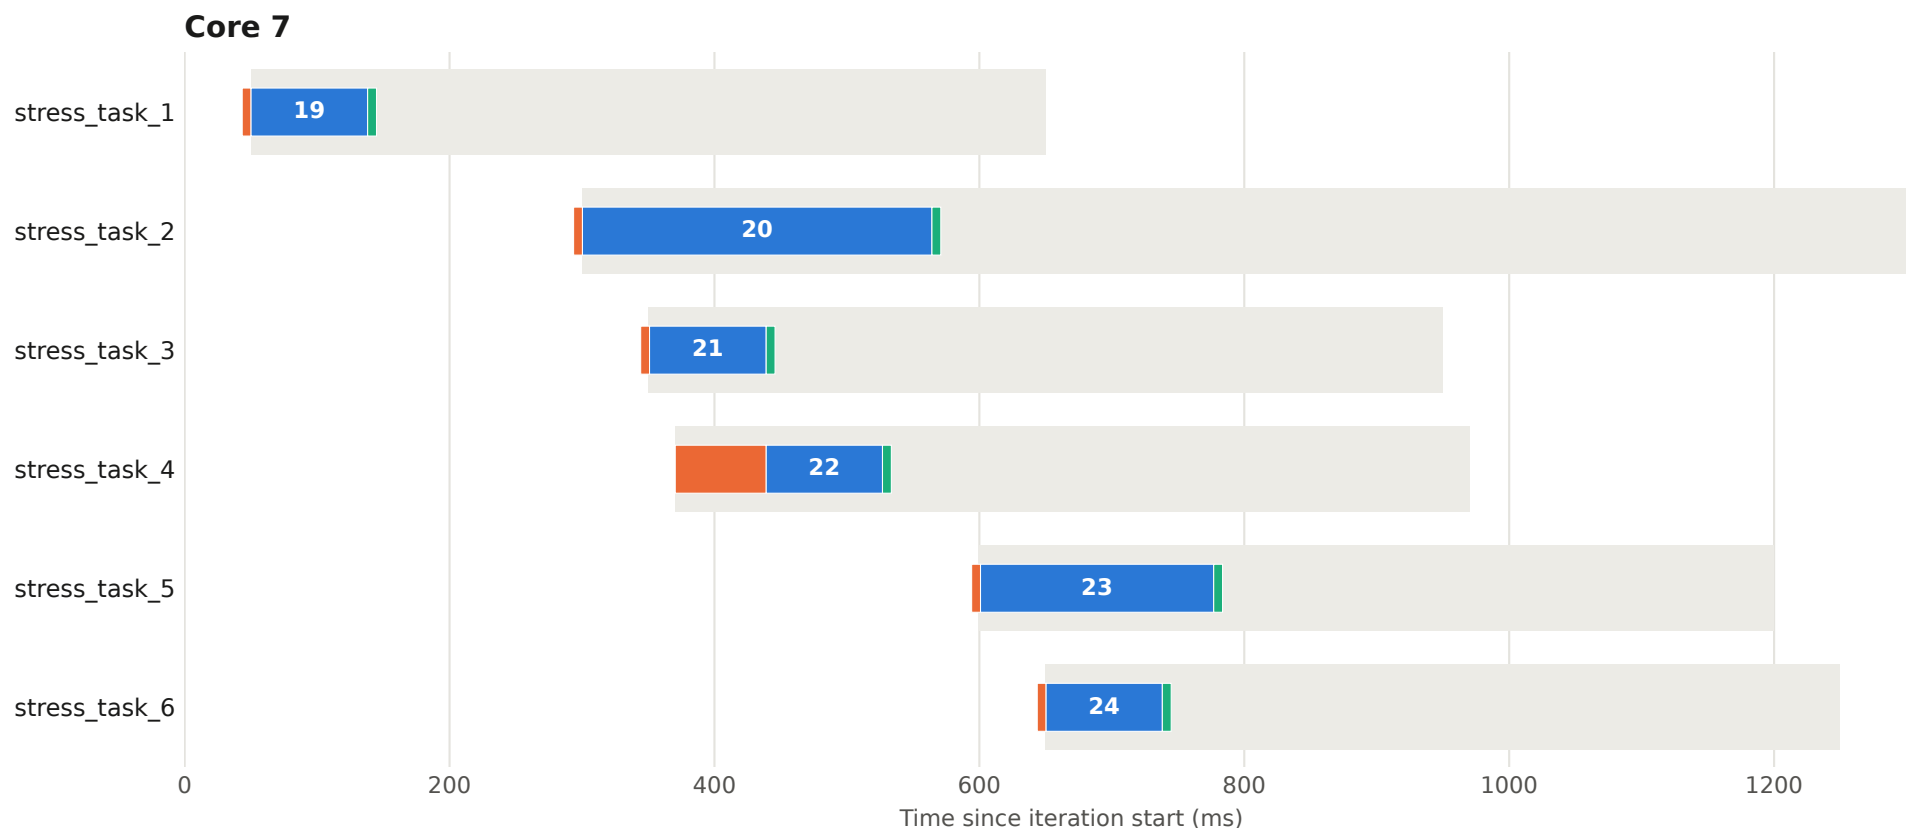


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 88 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

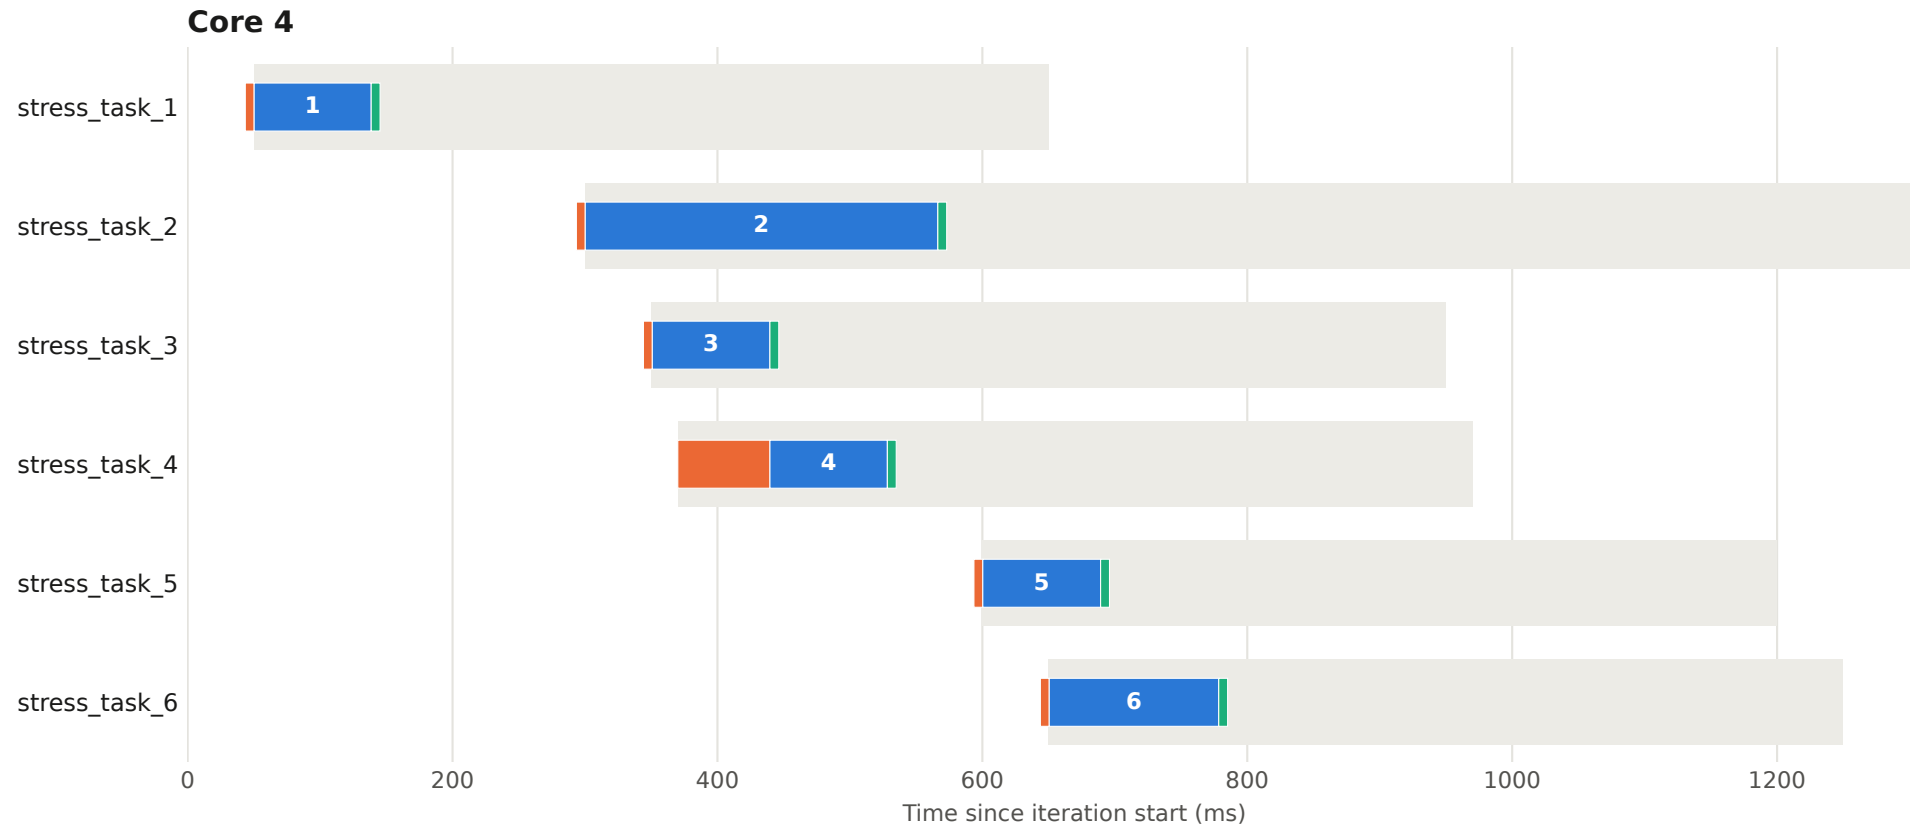


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 88 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

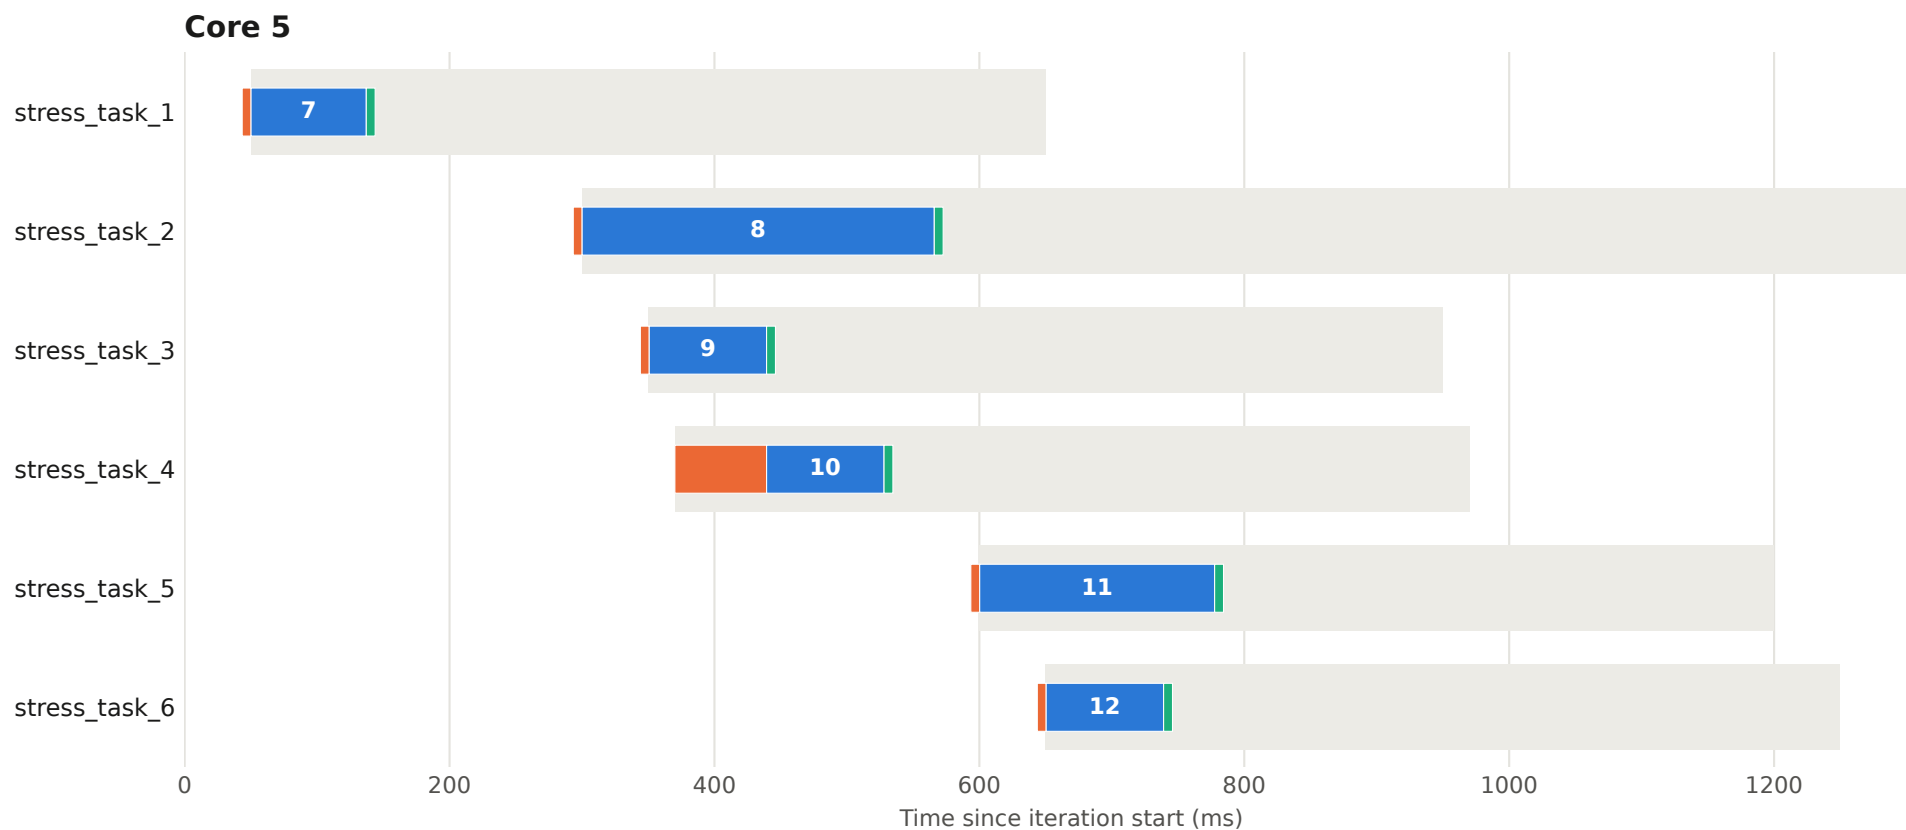


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 88 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

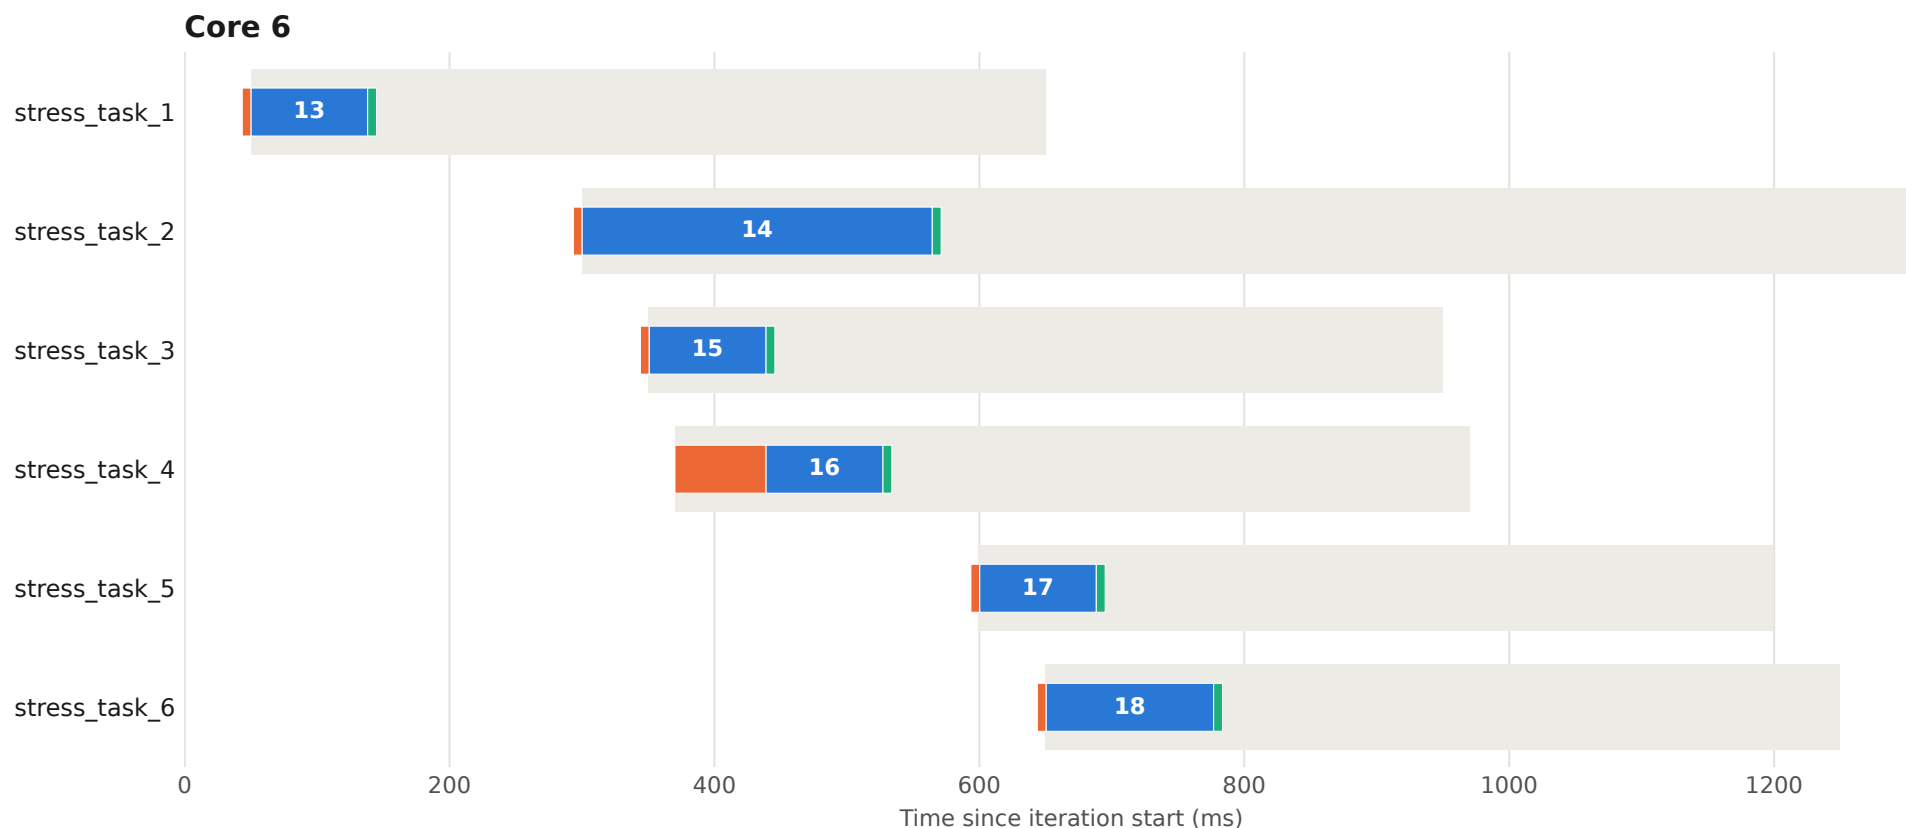


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 88 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

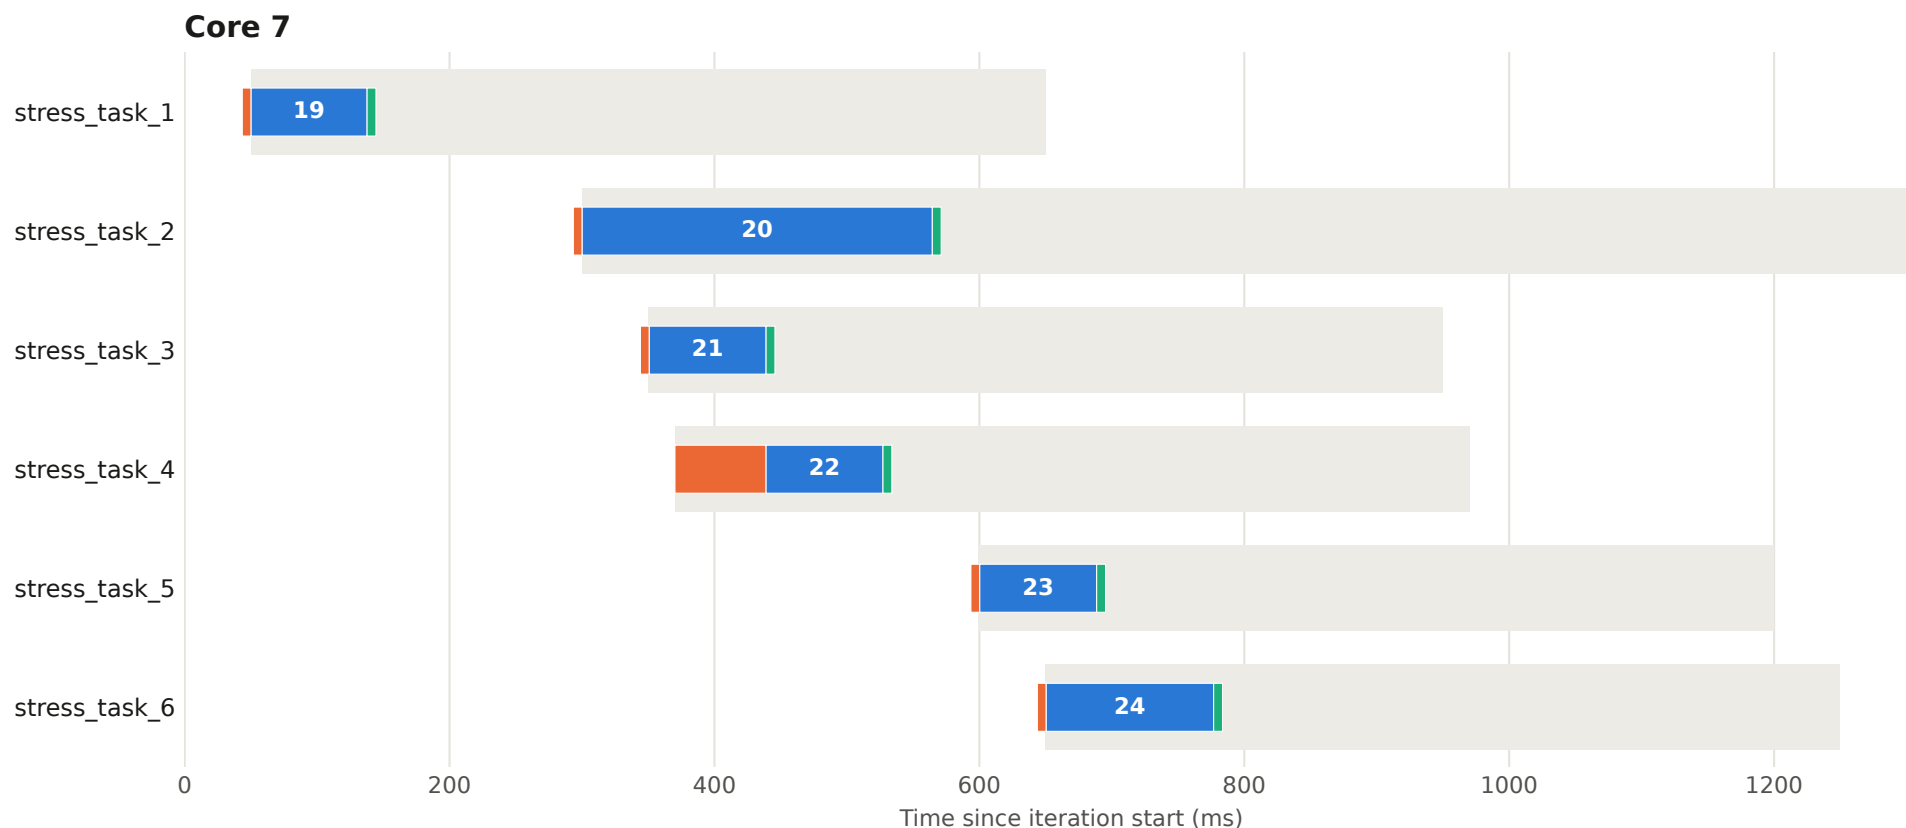


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 89 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

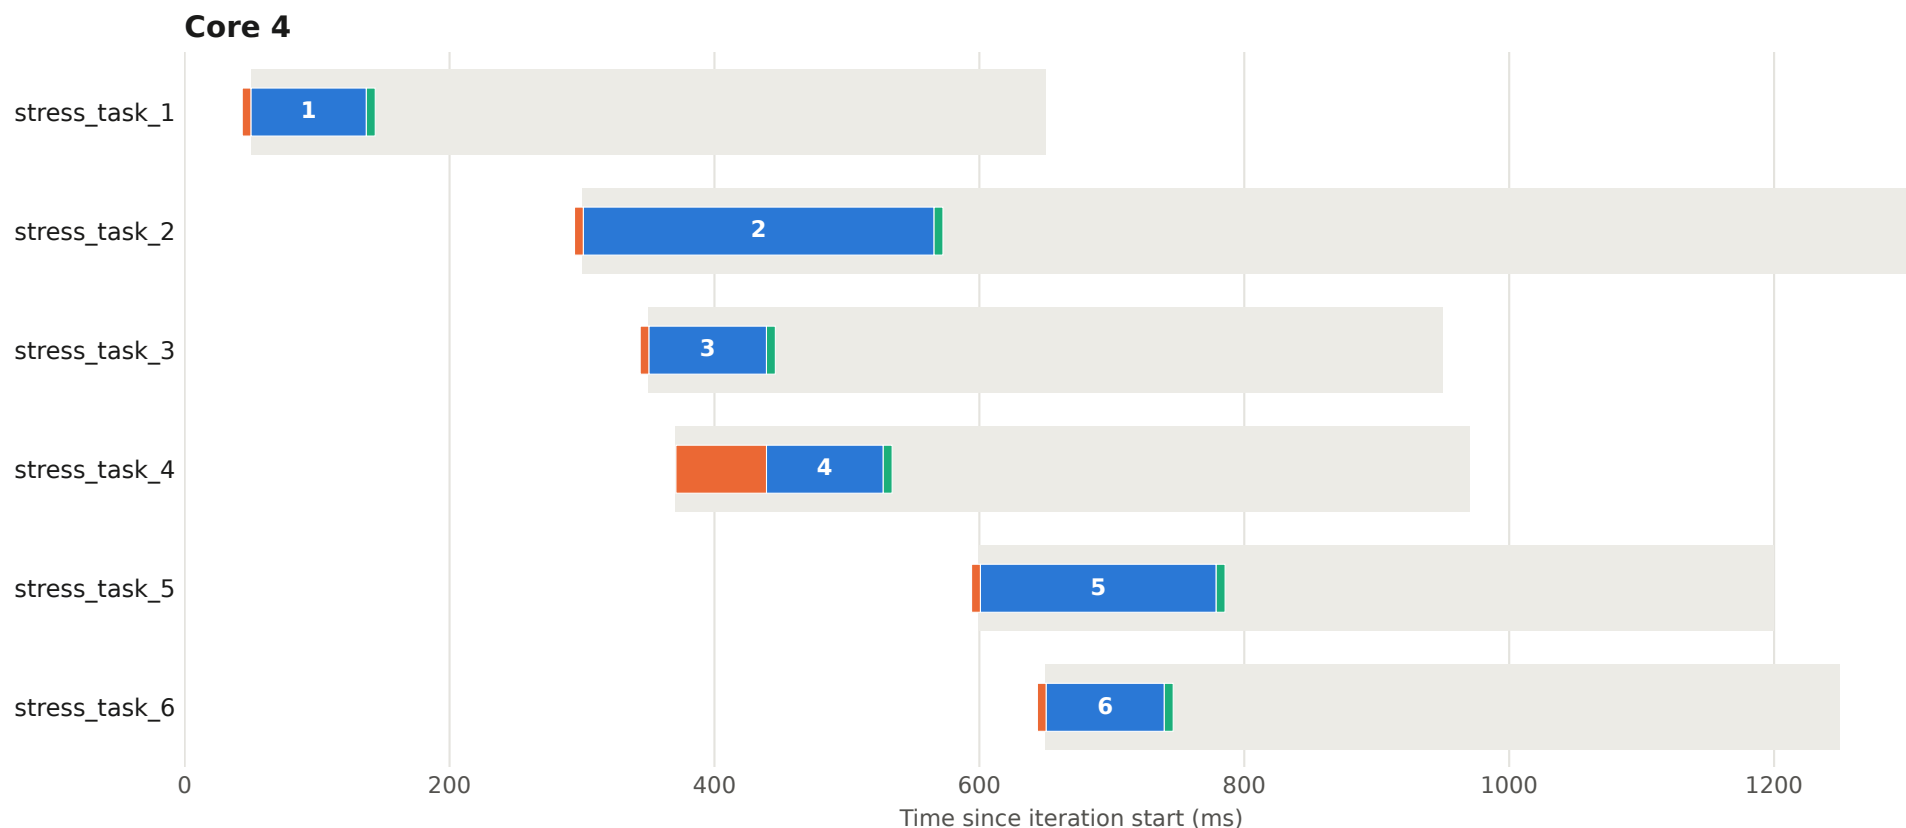


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 89 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

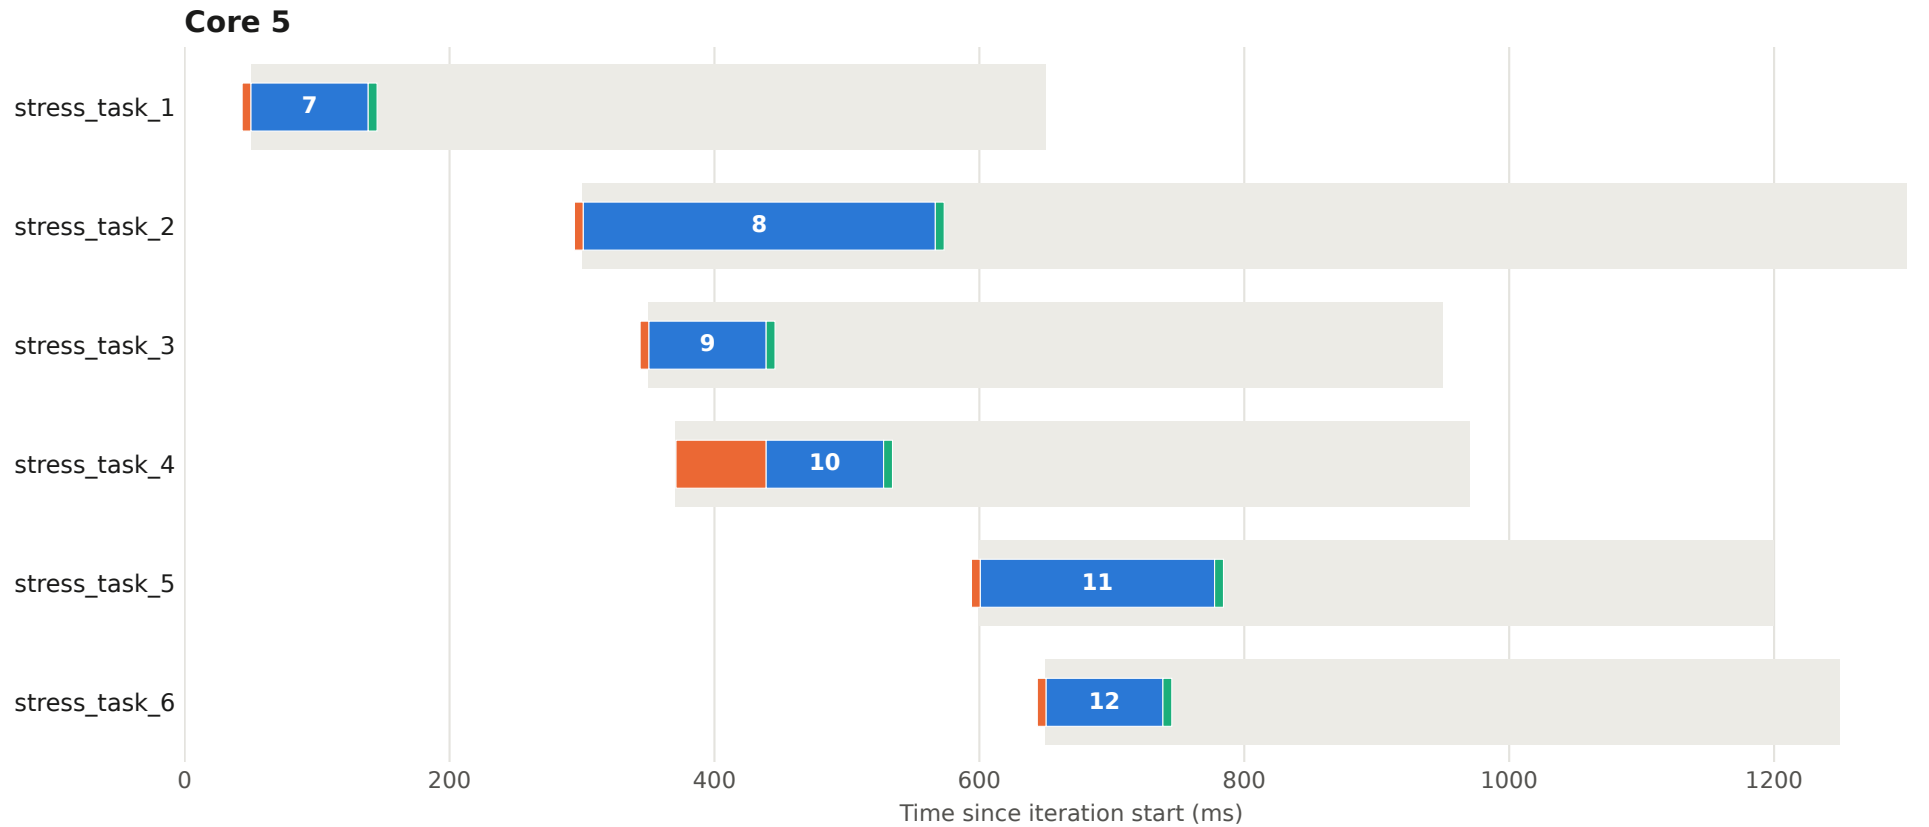


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 89 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

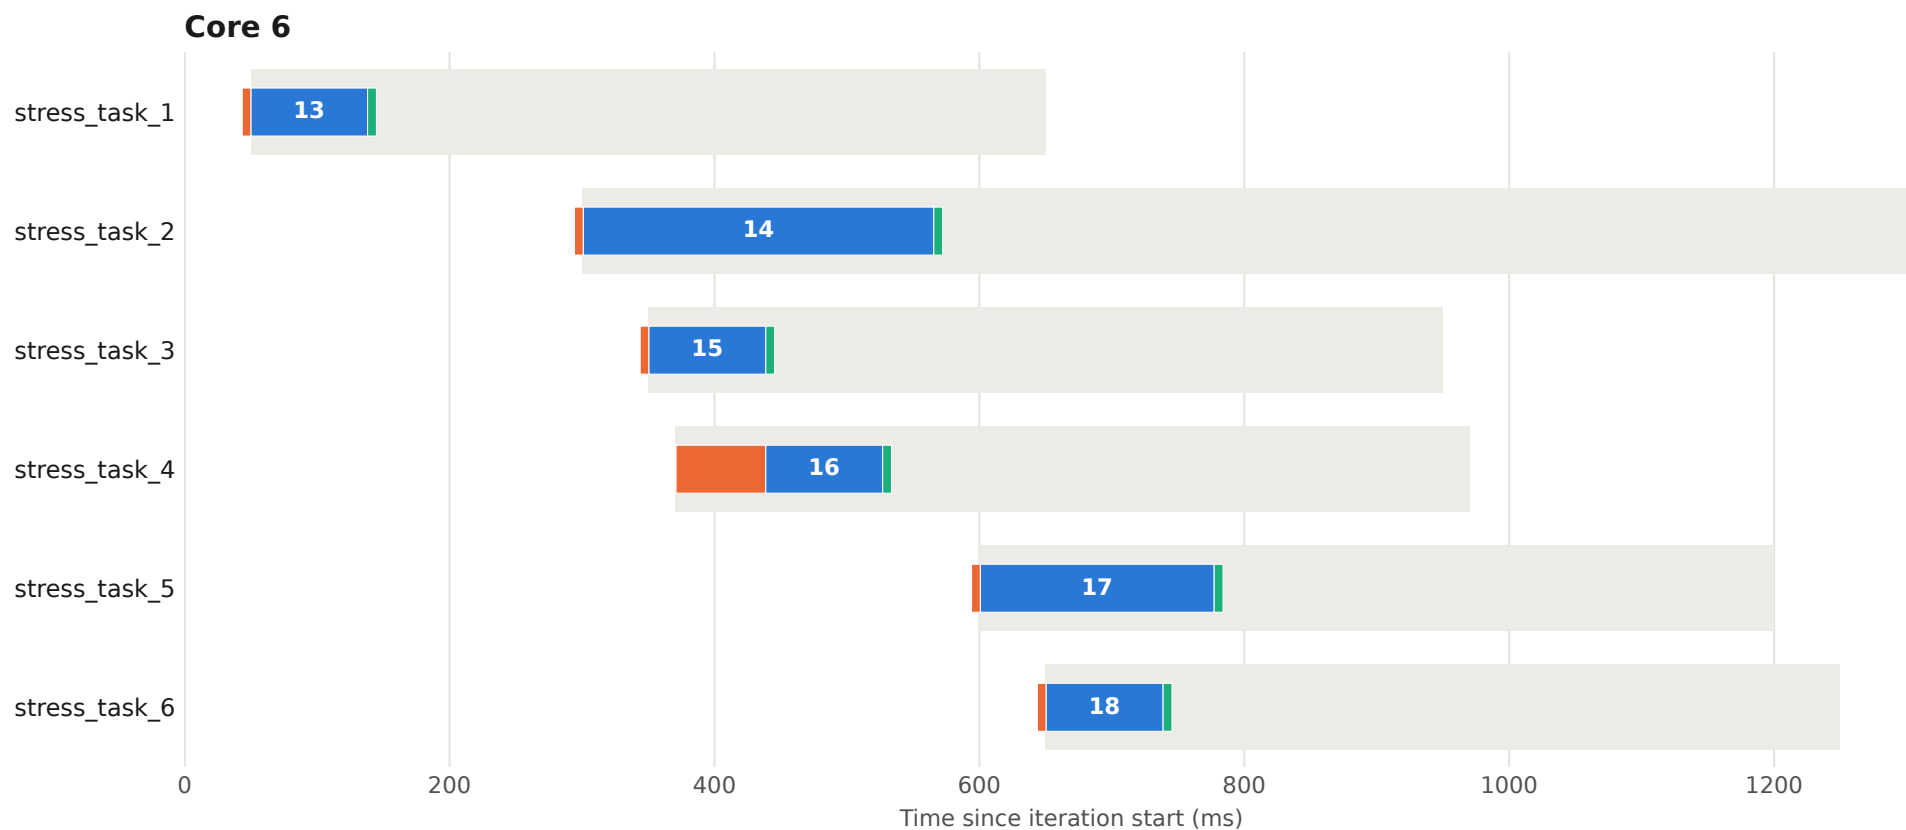


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 89 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

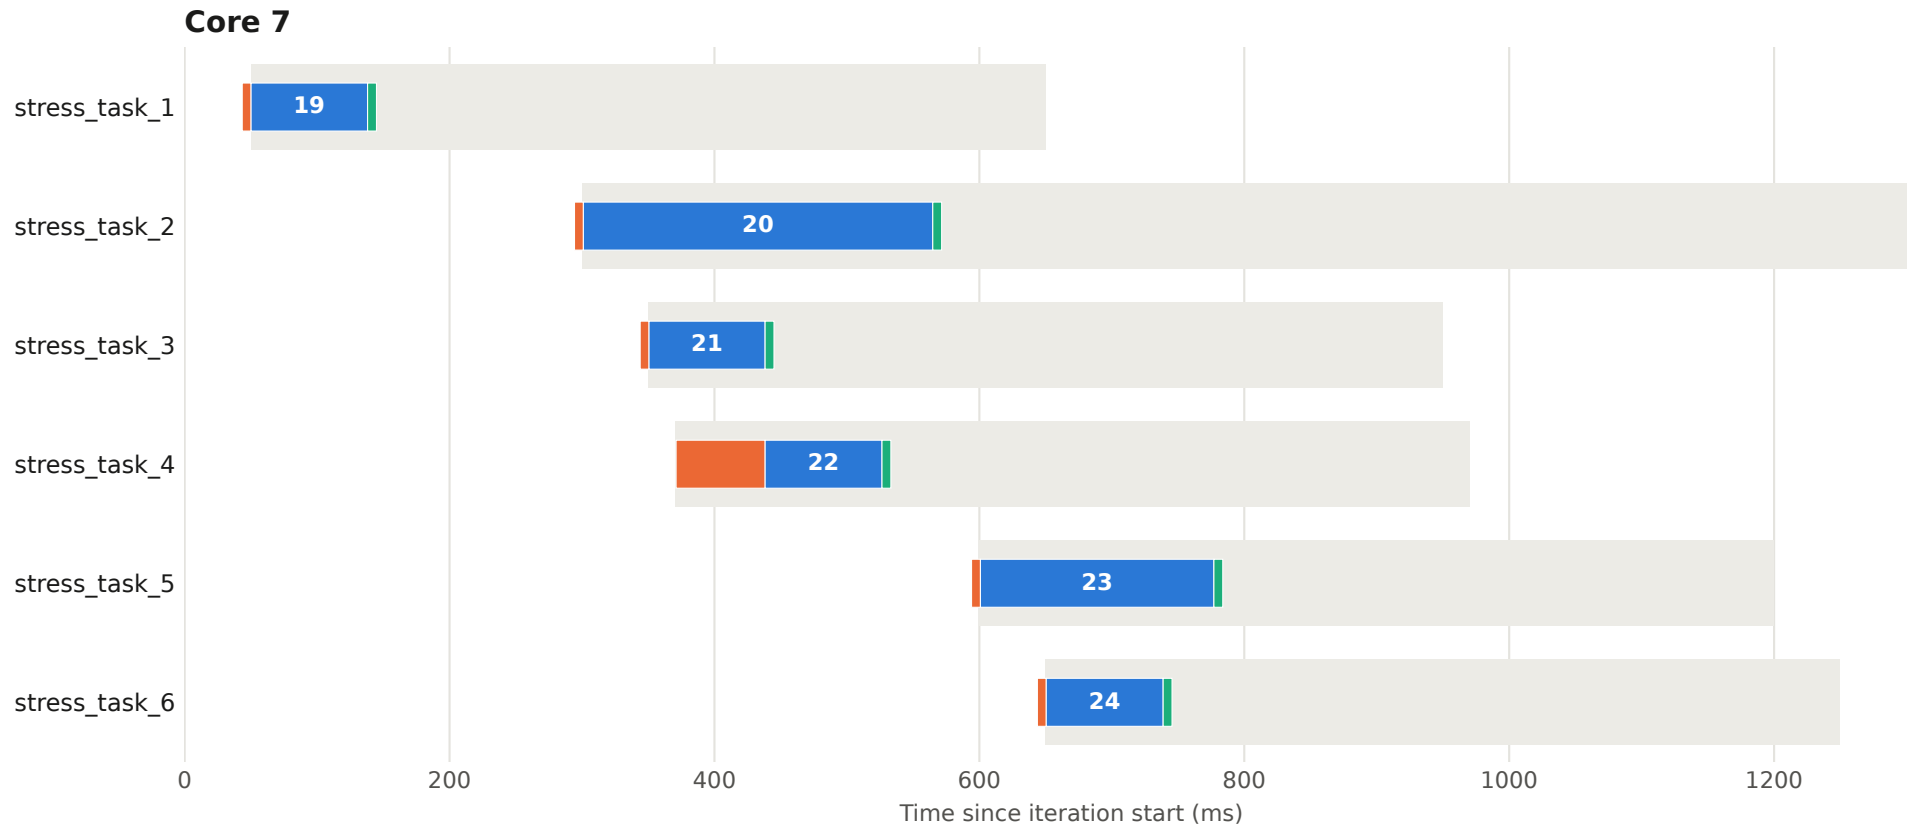


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 90 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

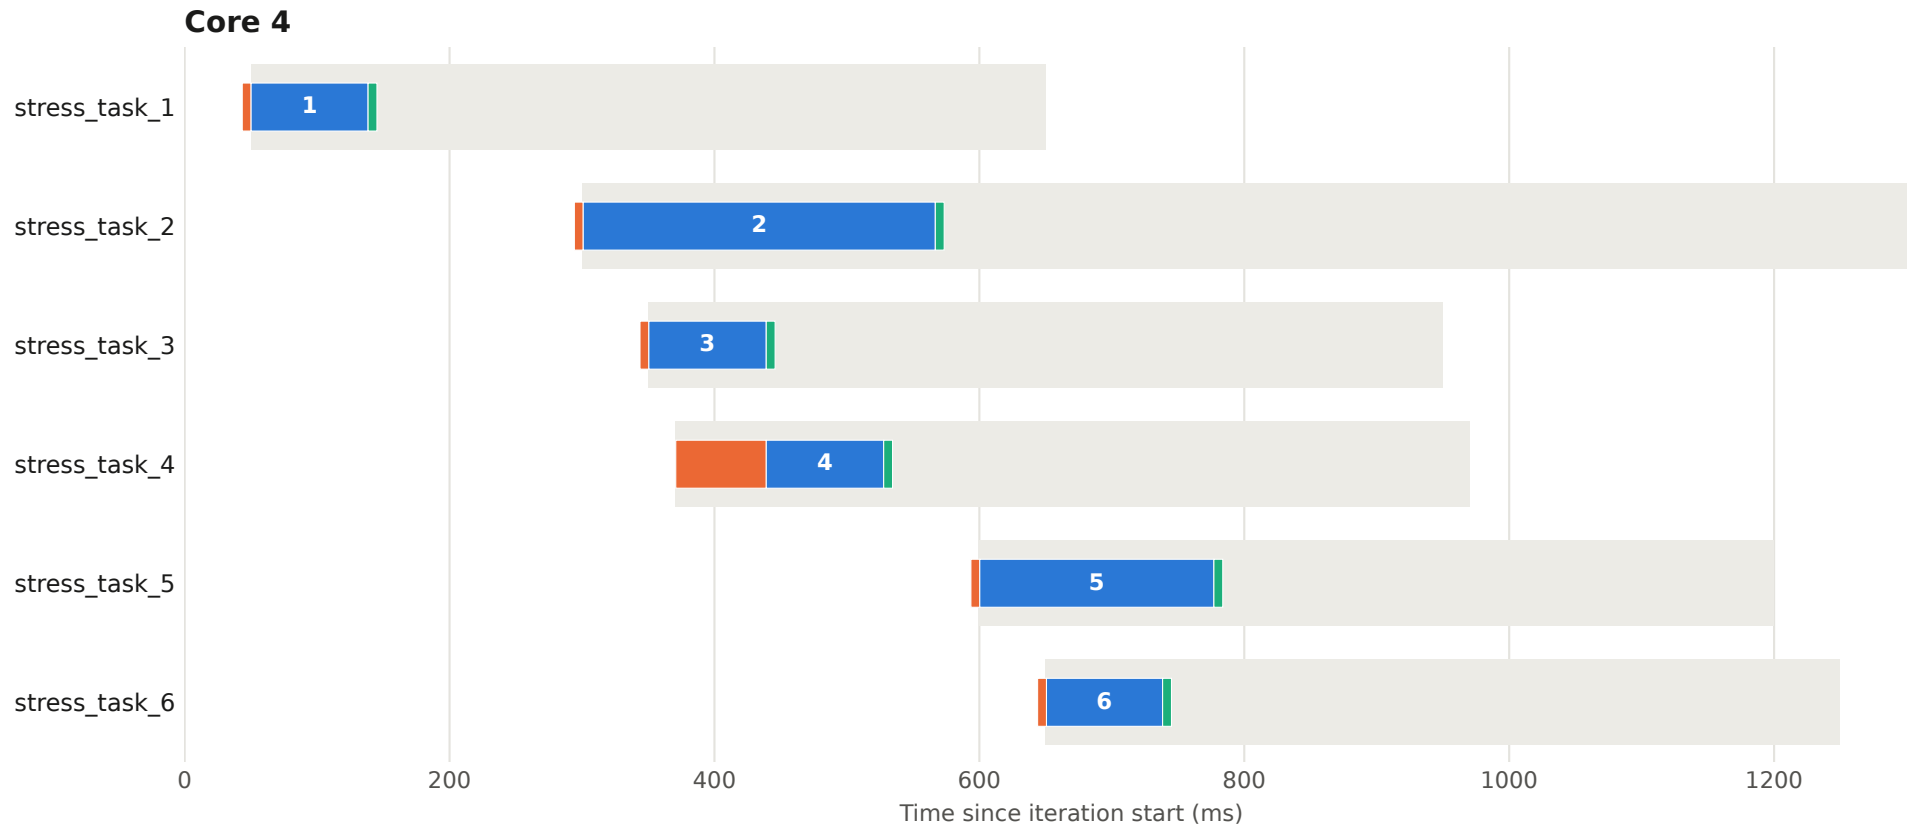


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 90 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

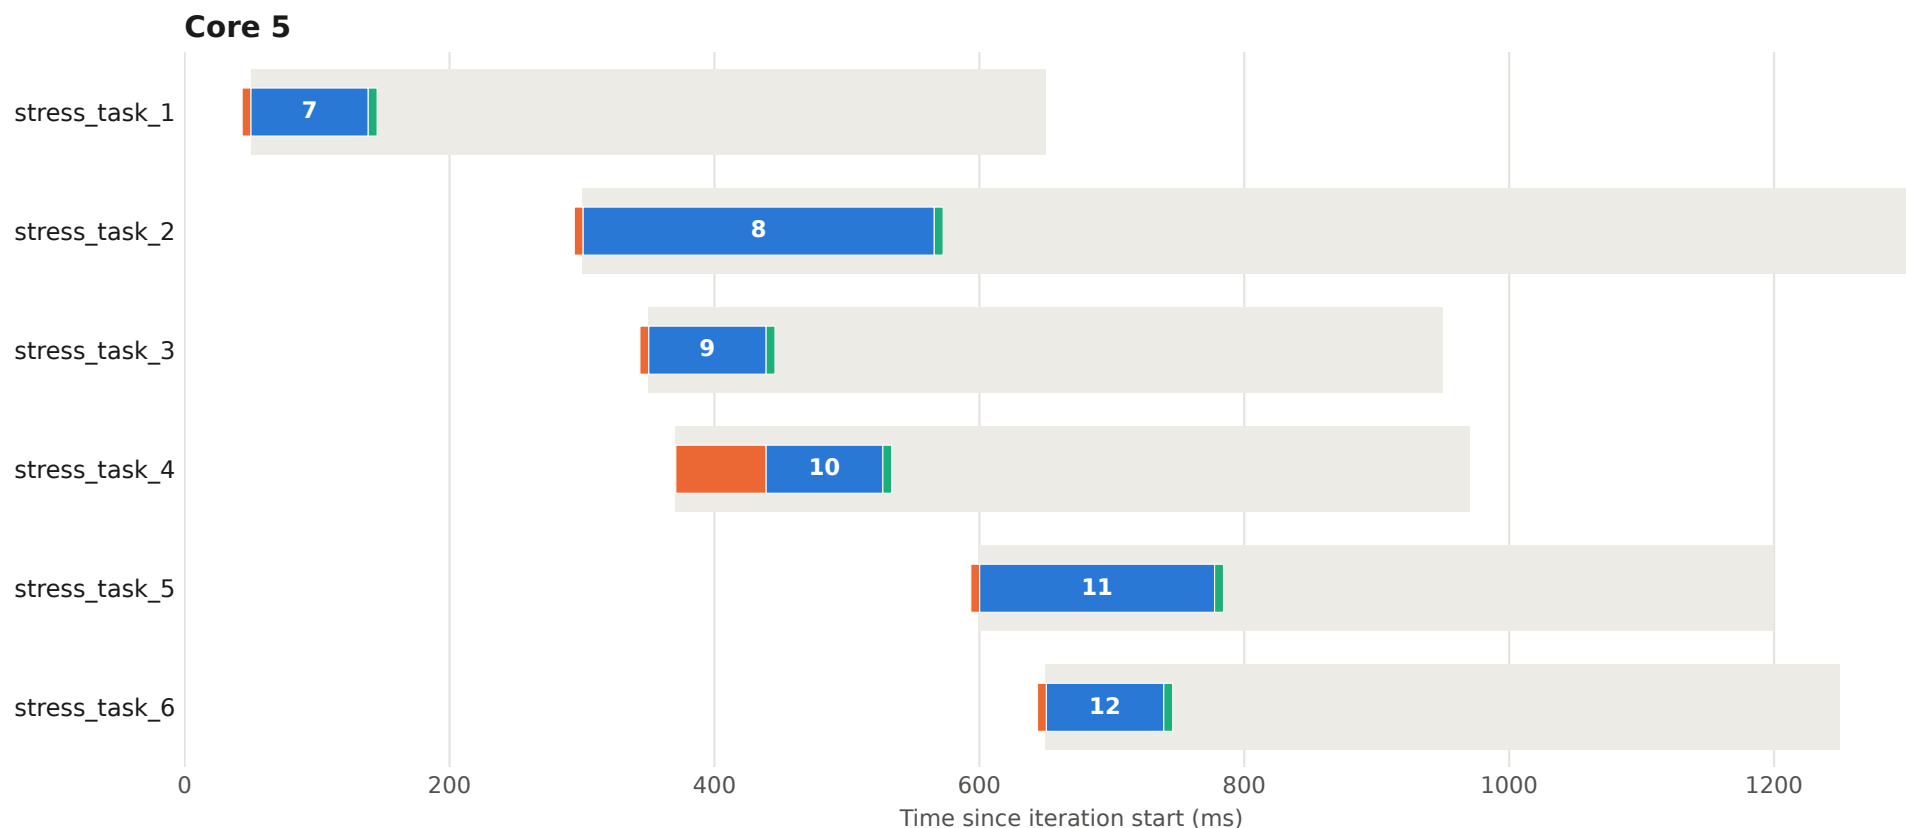


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 90 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

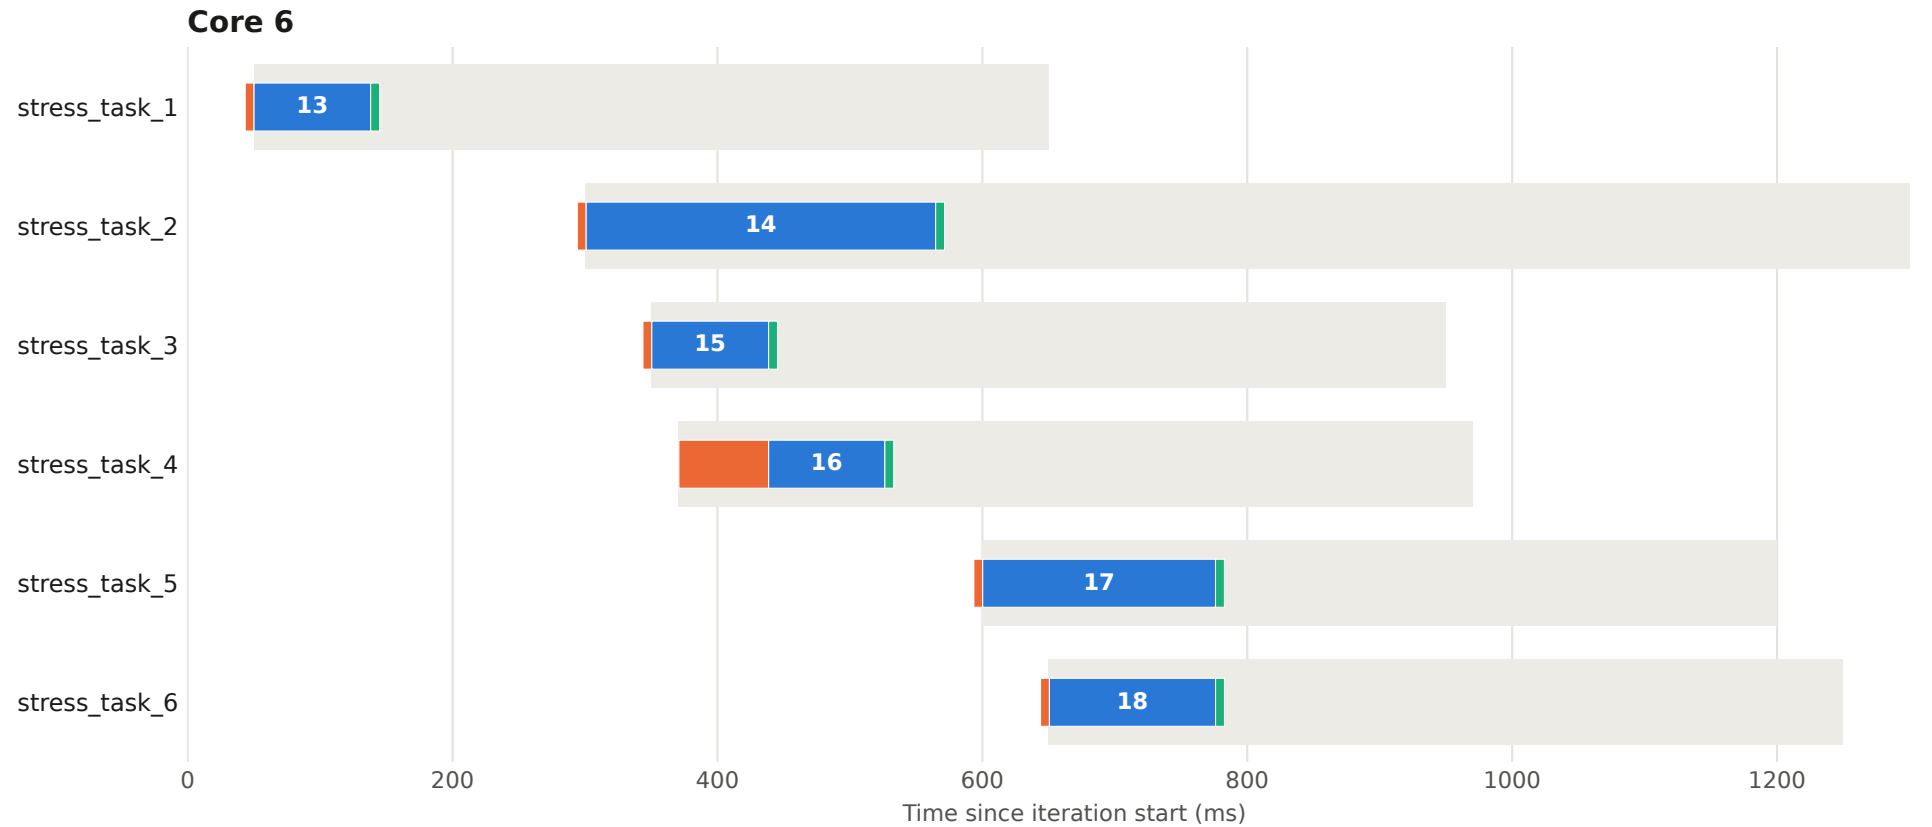


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 90 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

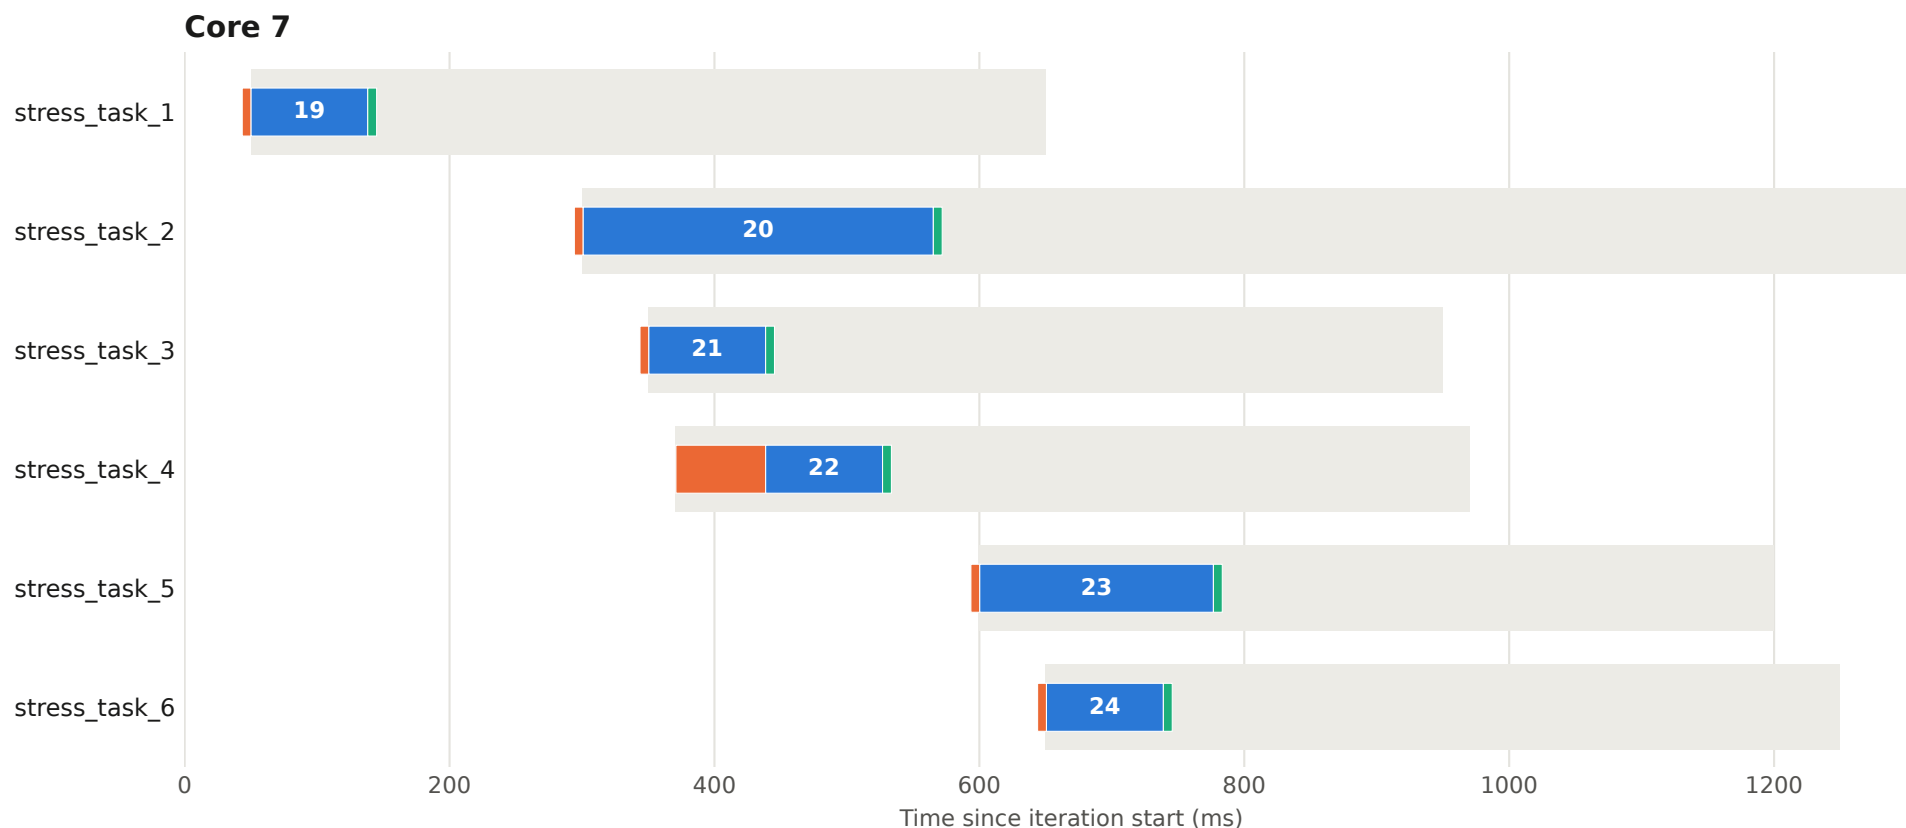


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 91 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

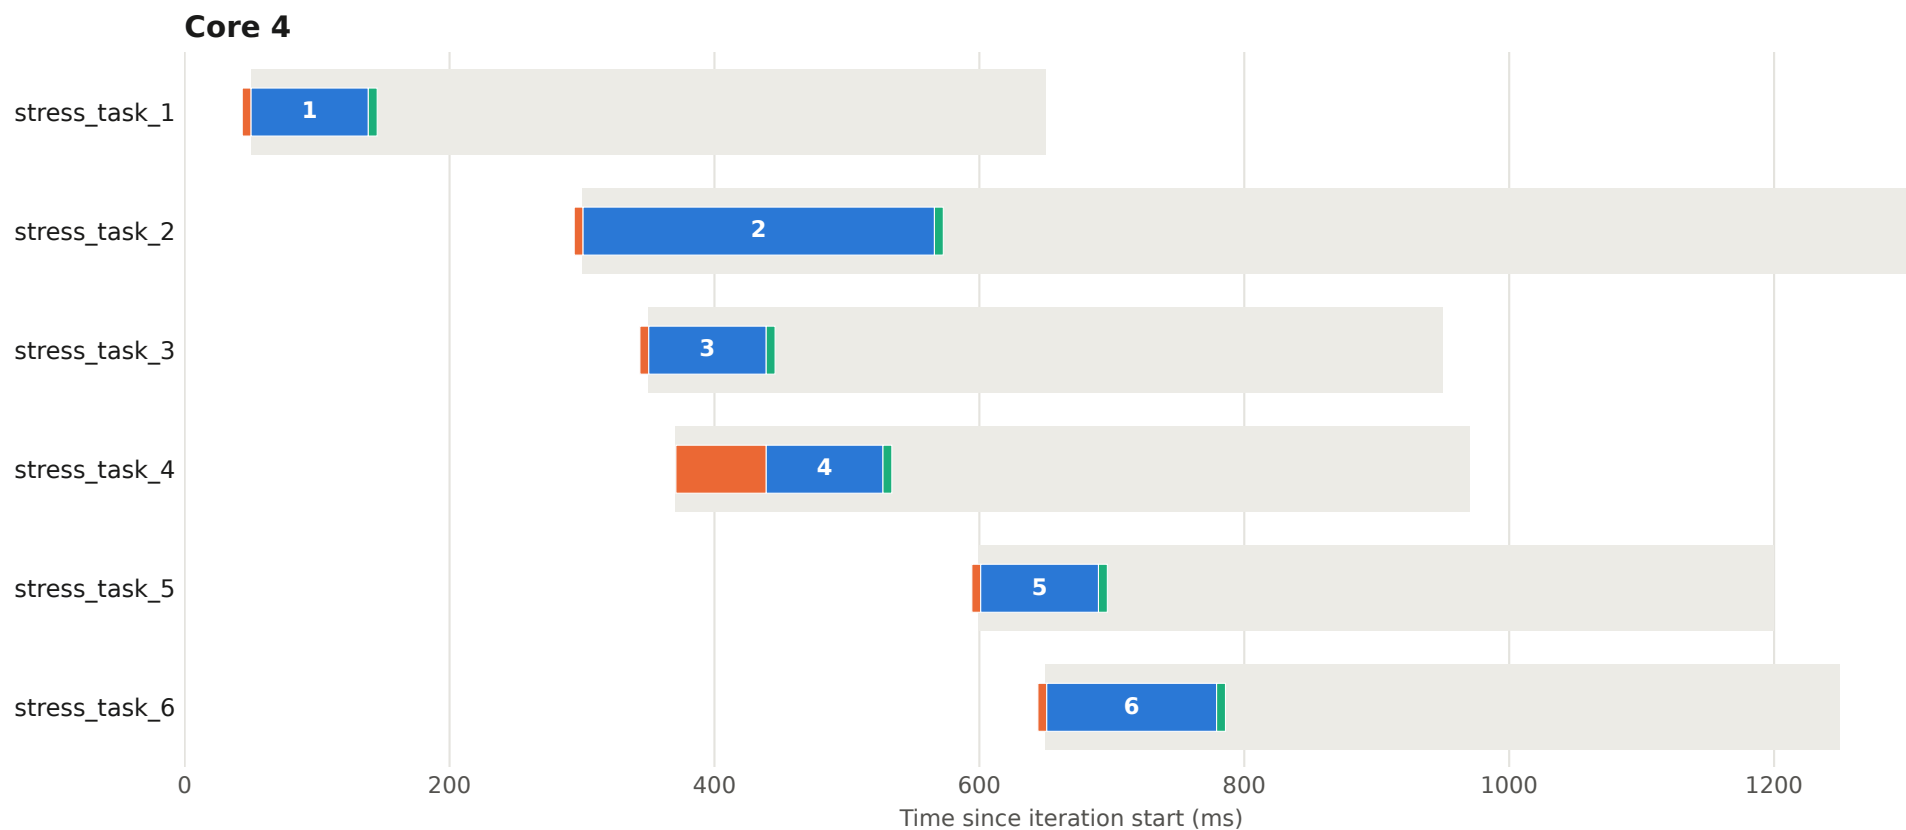


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 91 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

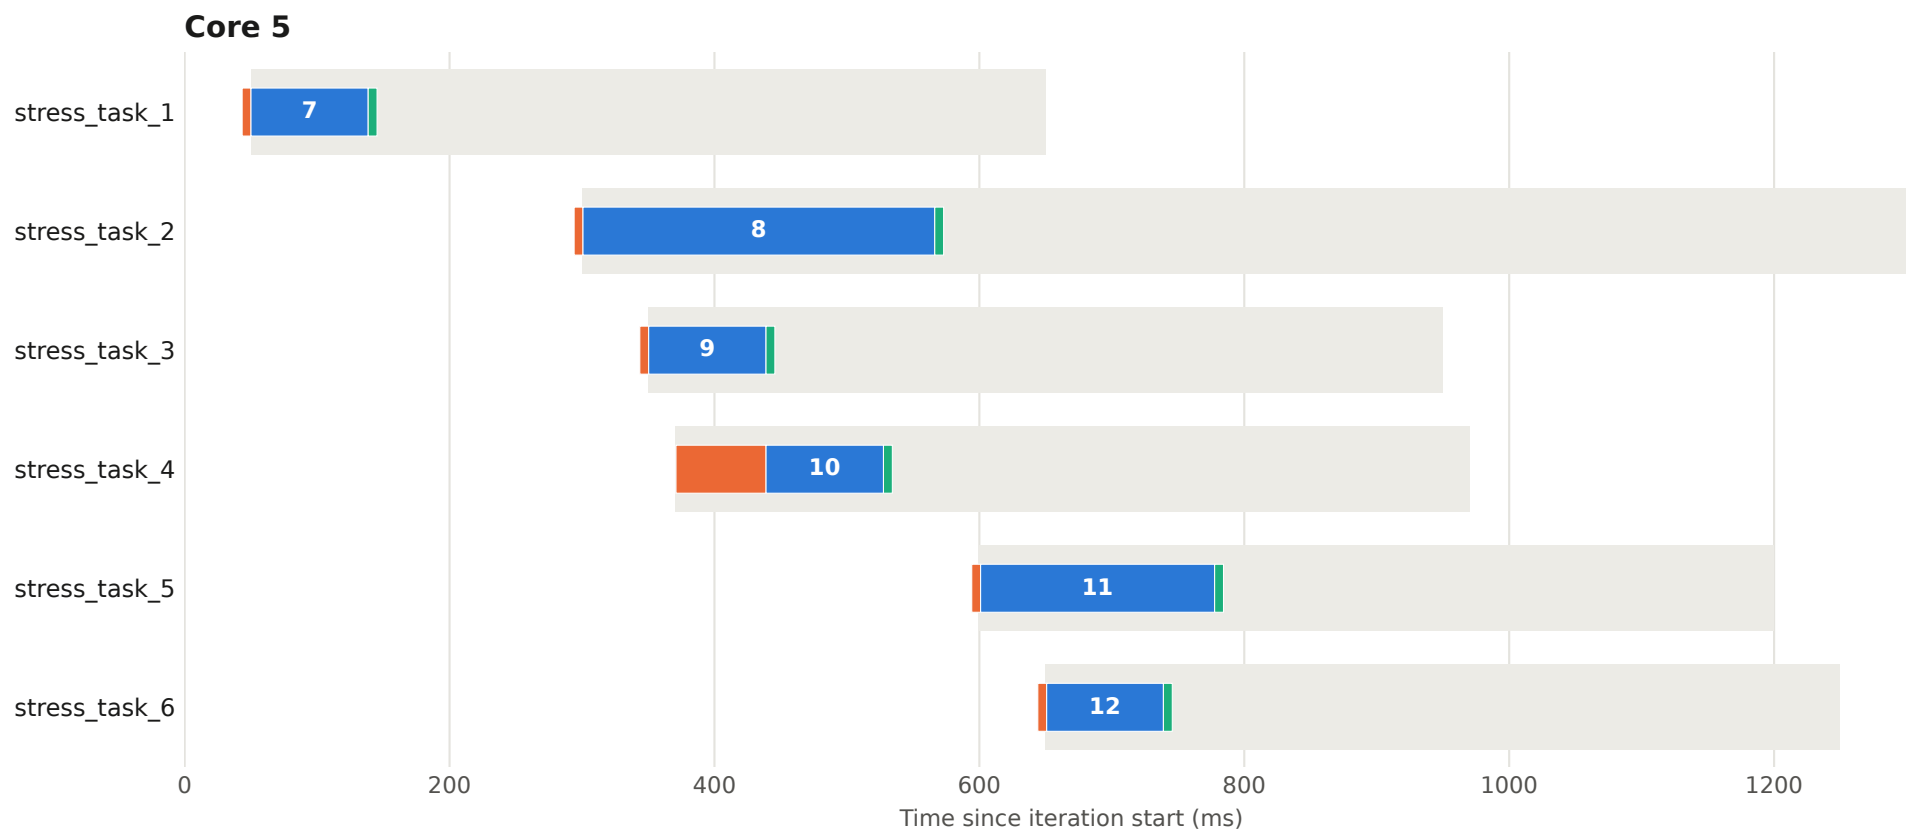


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 91 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

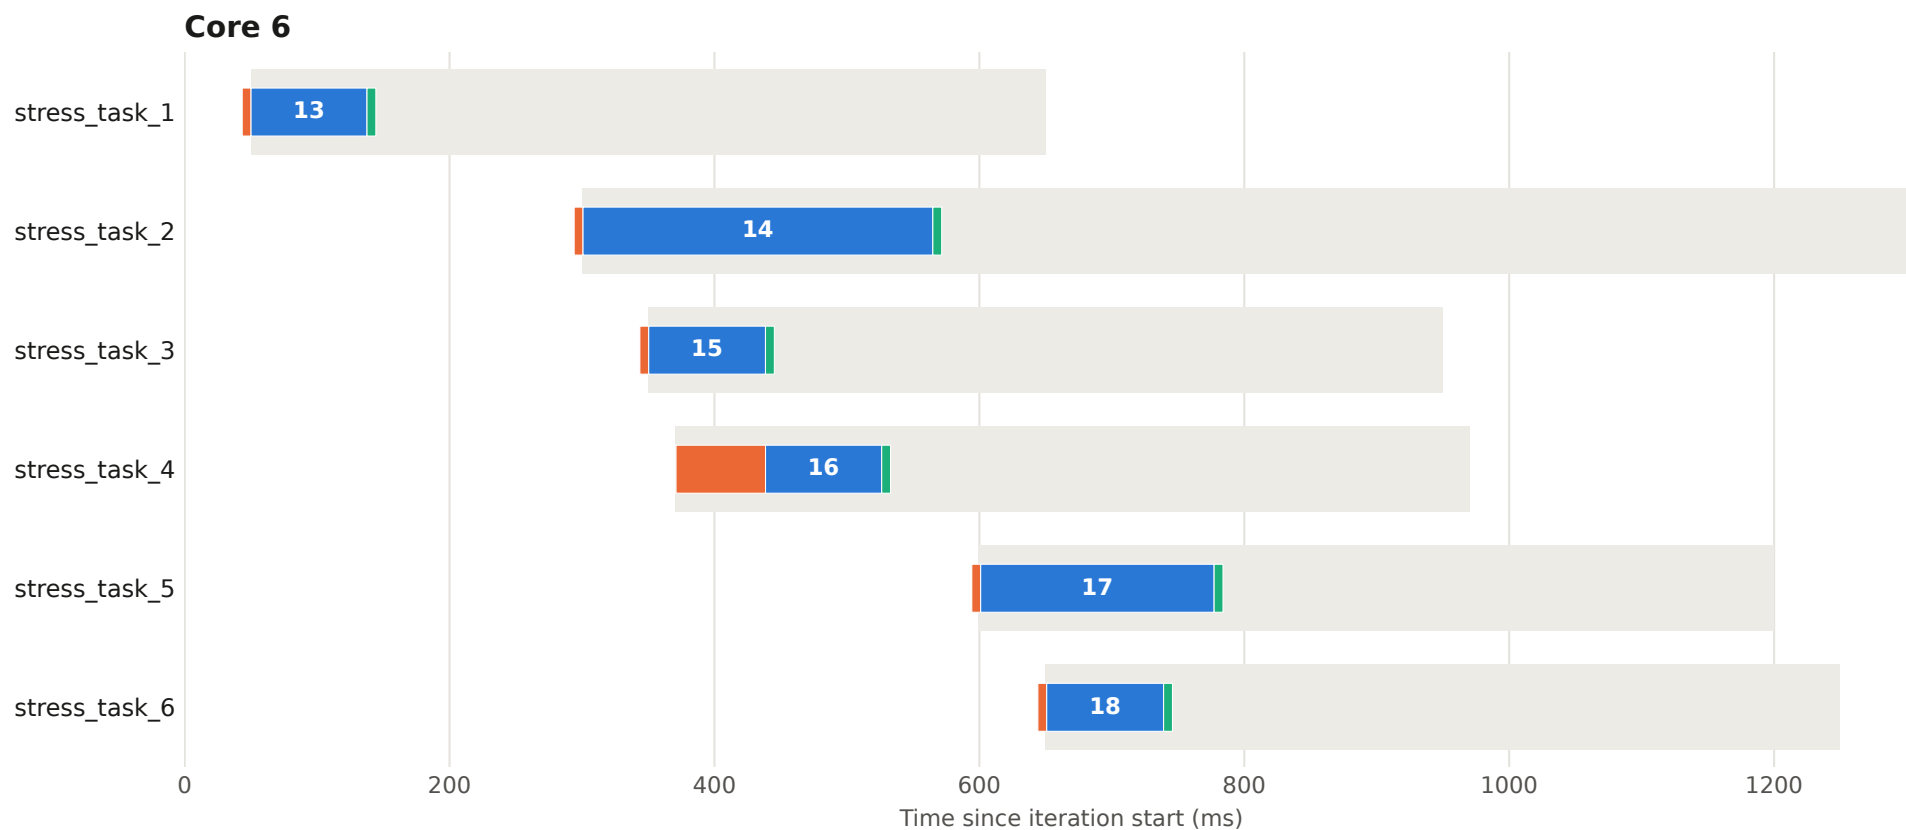


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 91 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

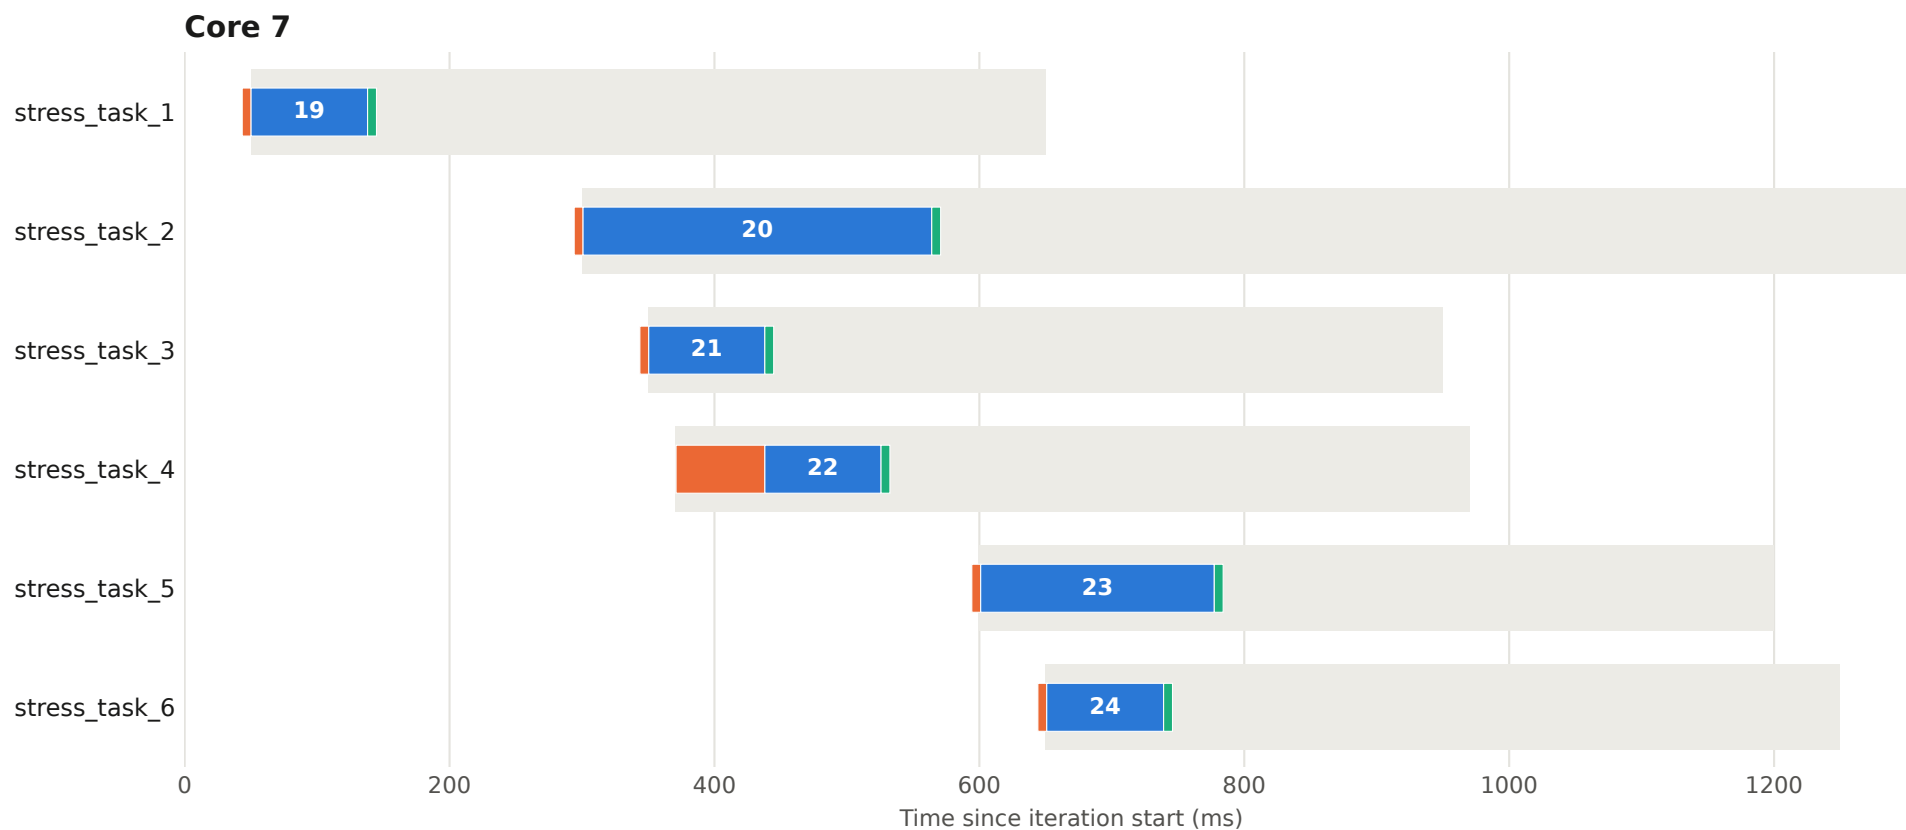


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 92 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

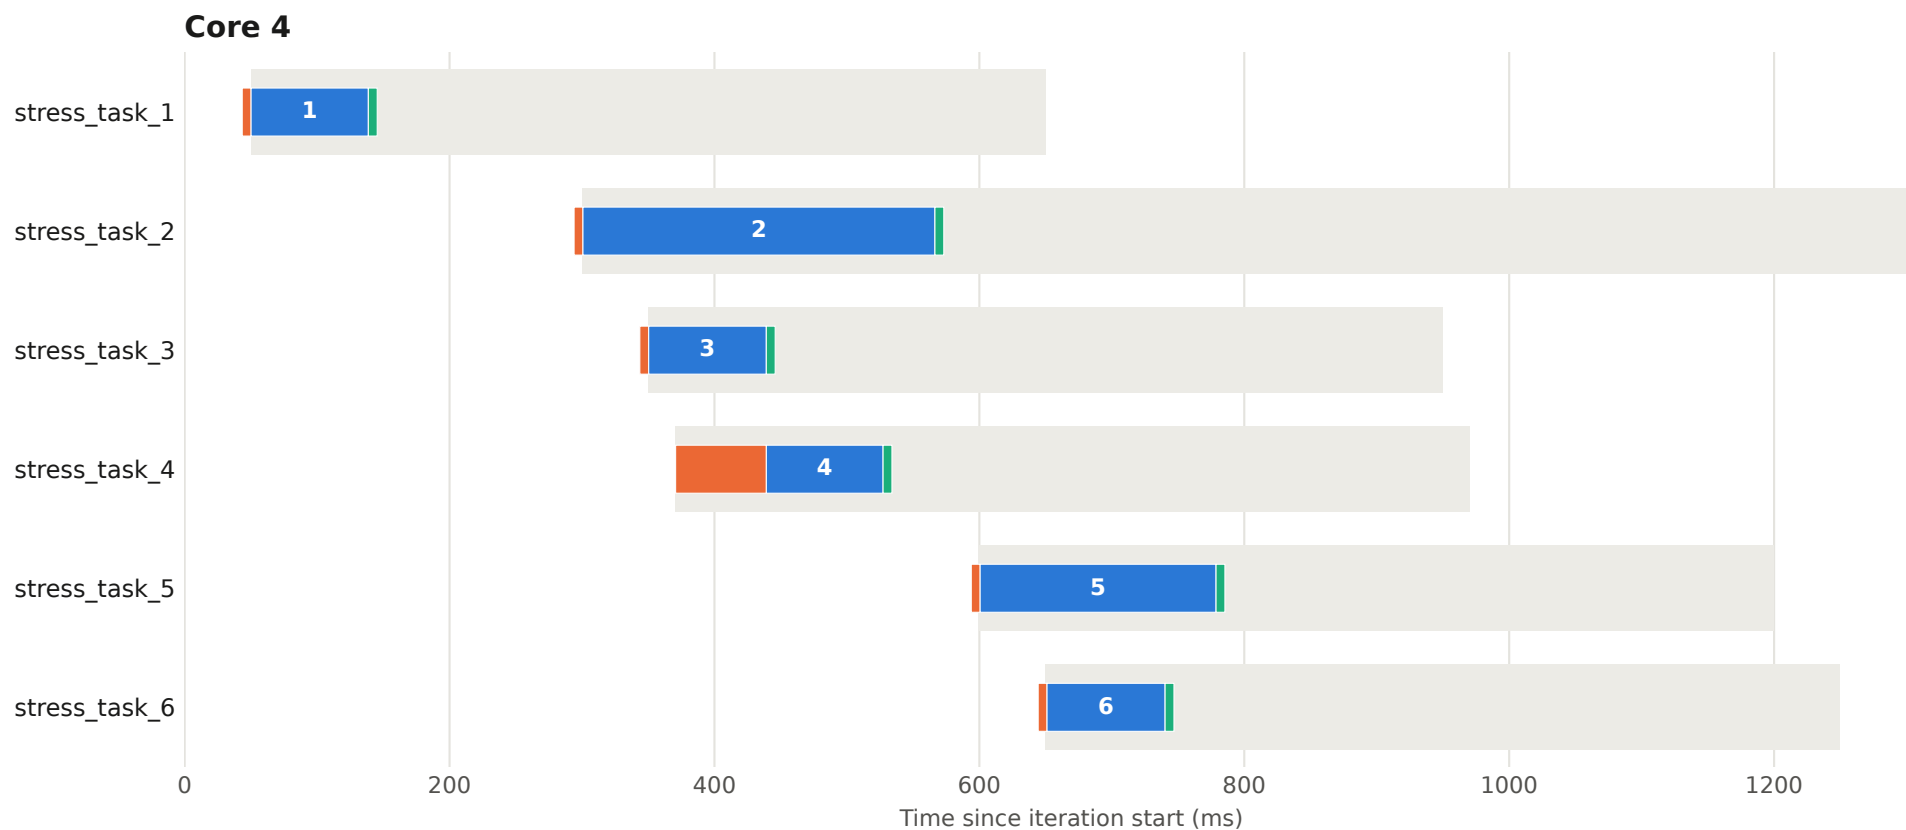


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 92 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

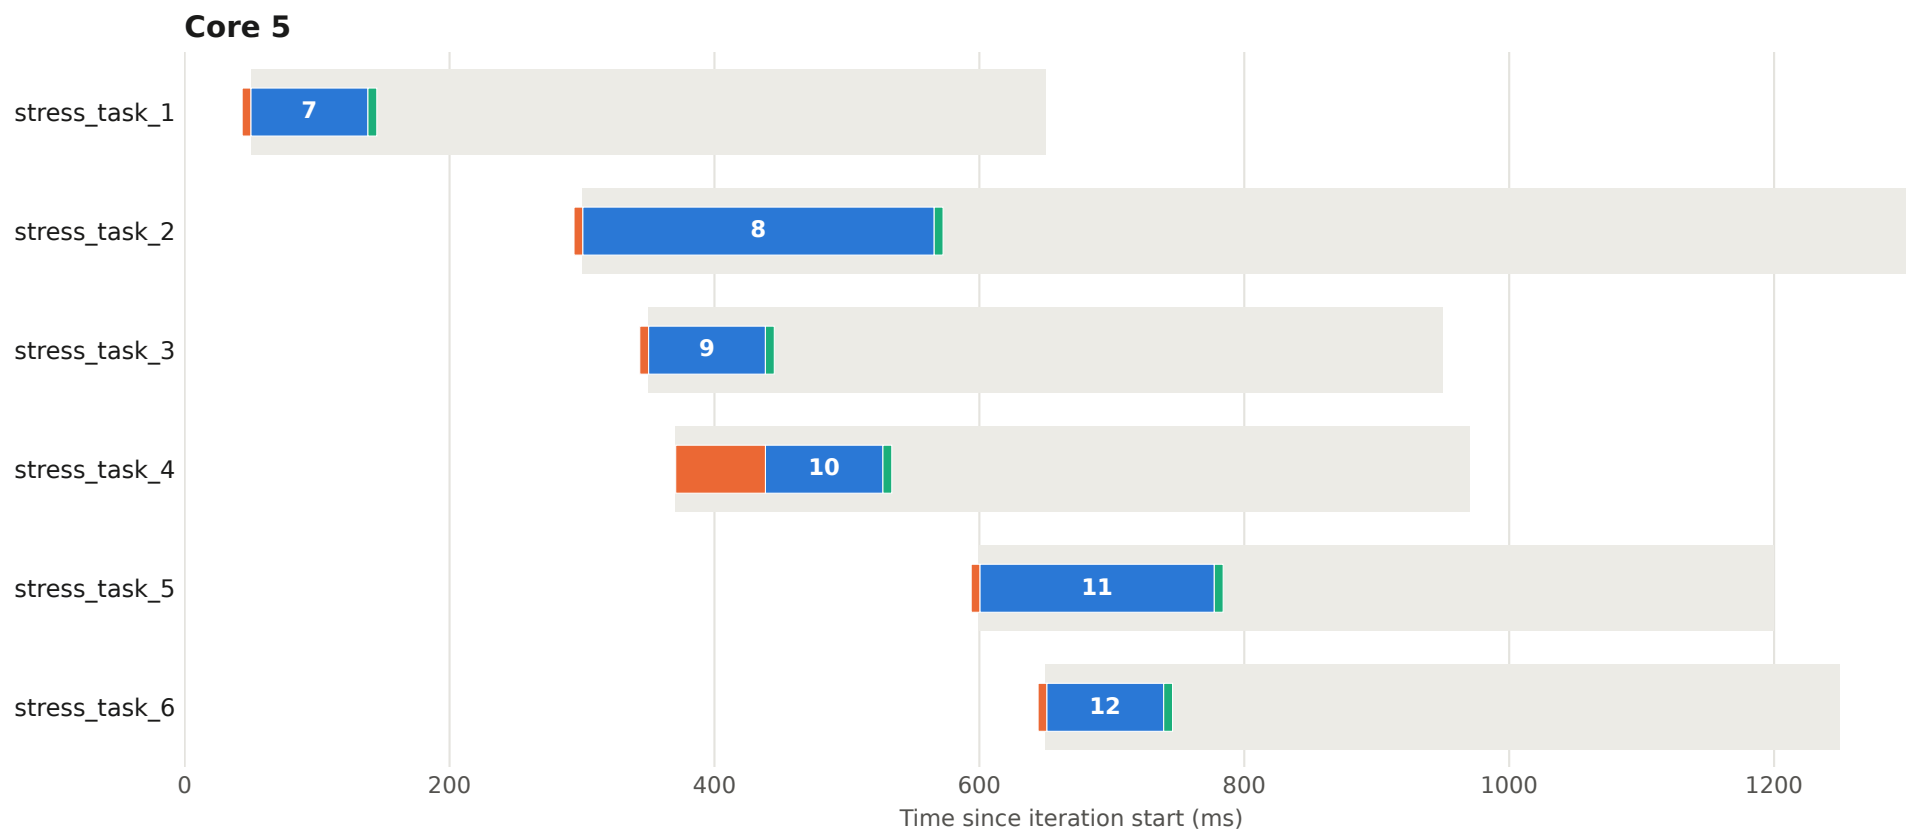


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 92 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

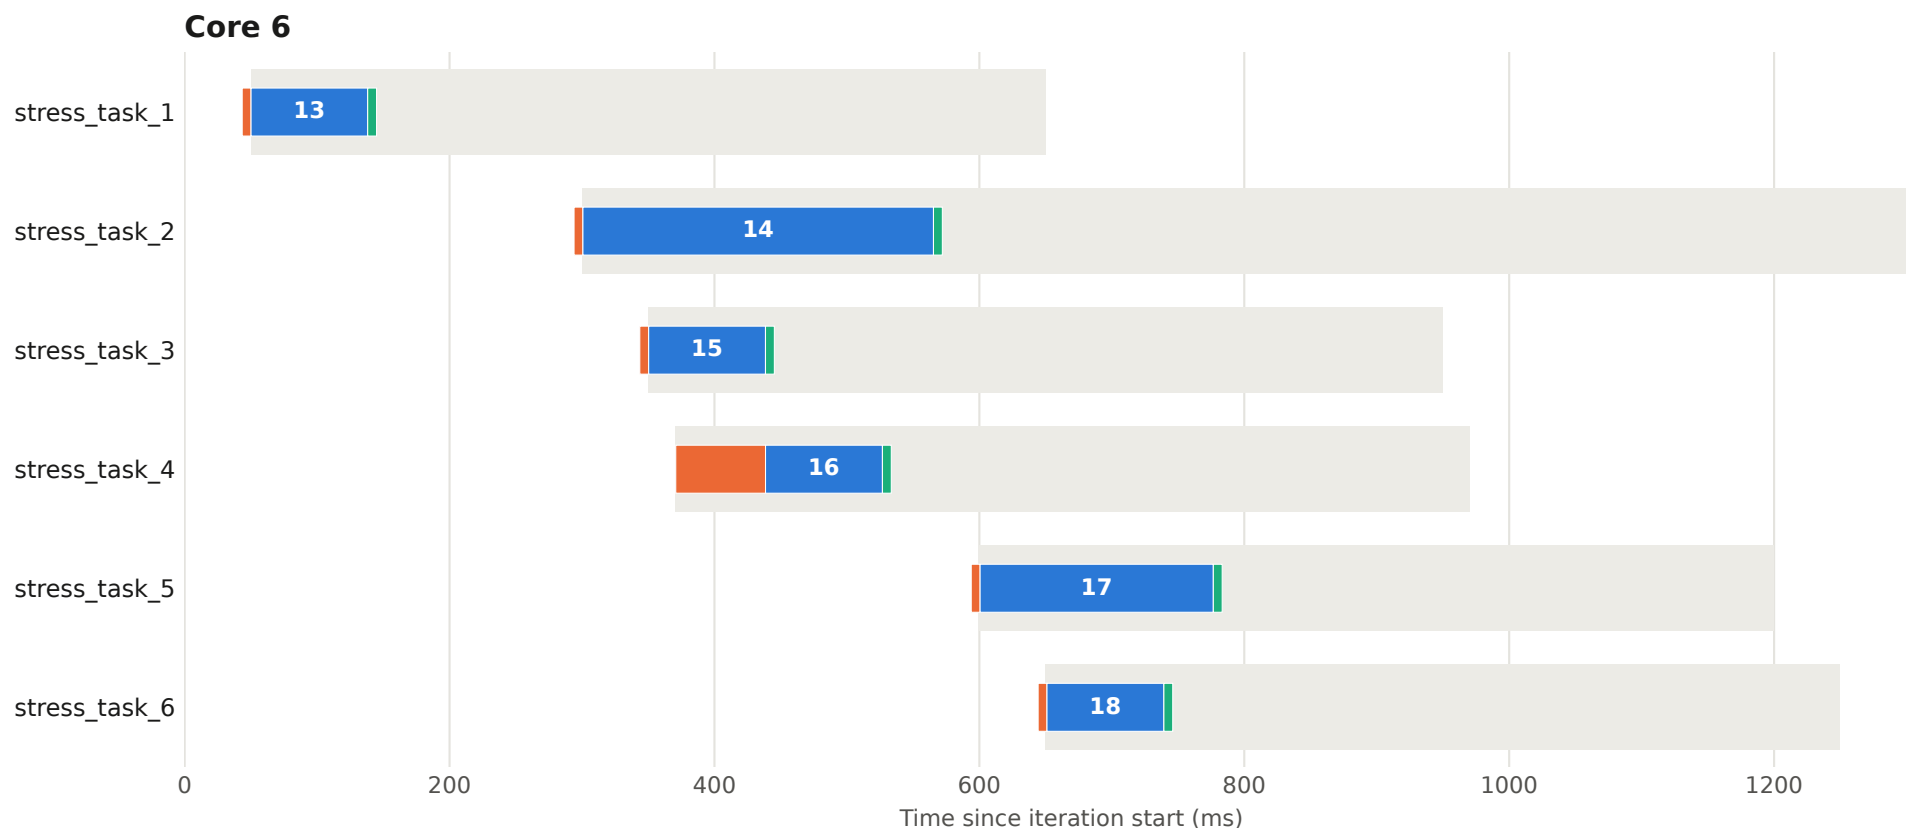


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 92 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

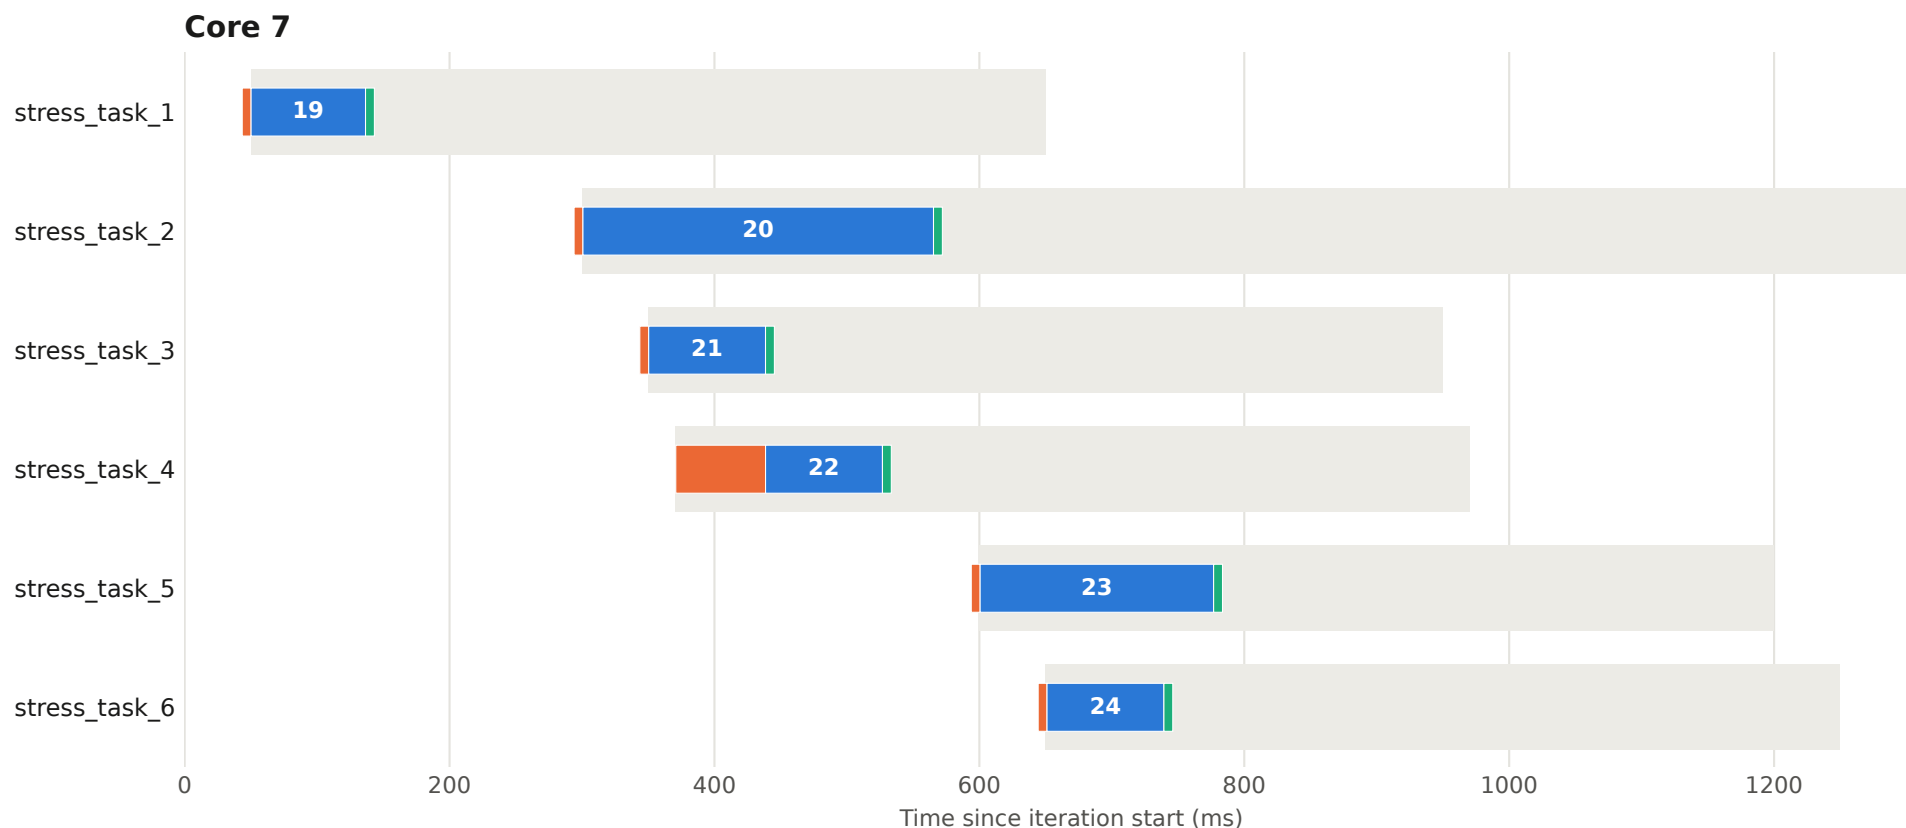


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 93 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

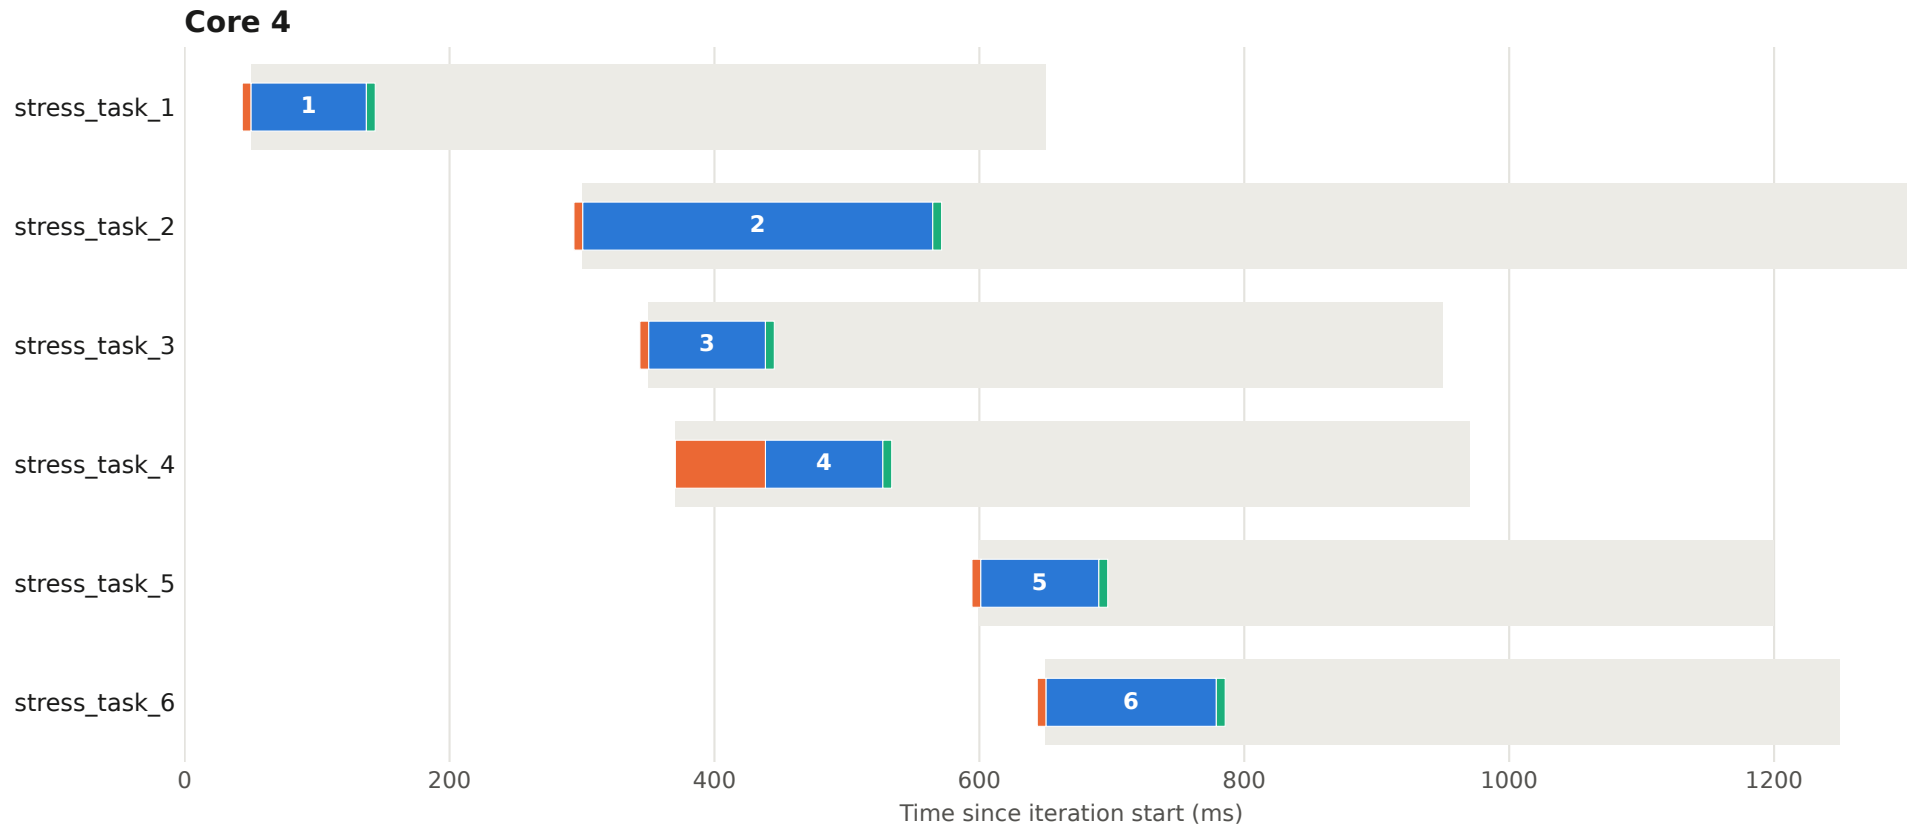


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 93 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

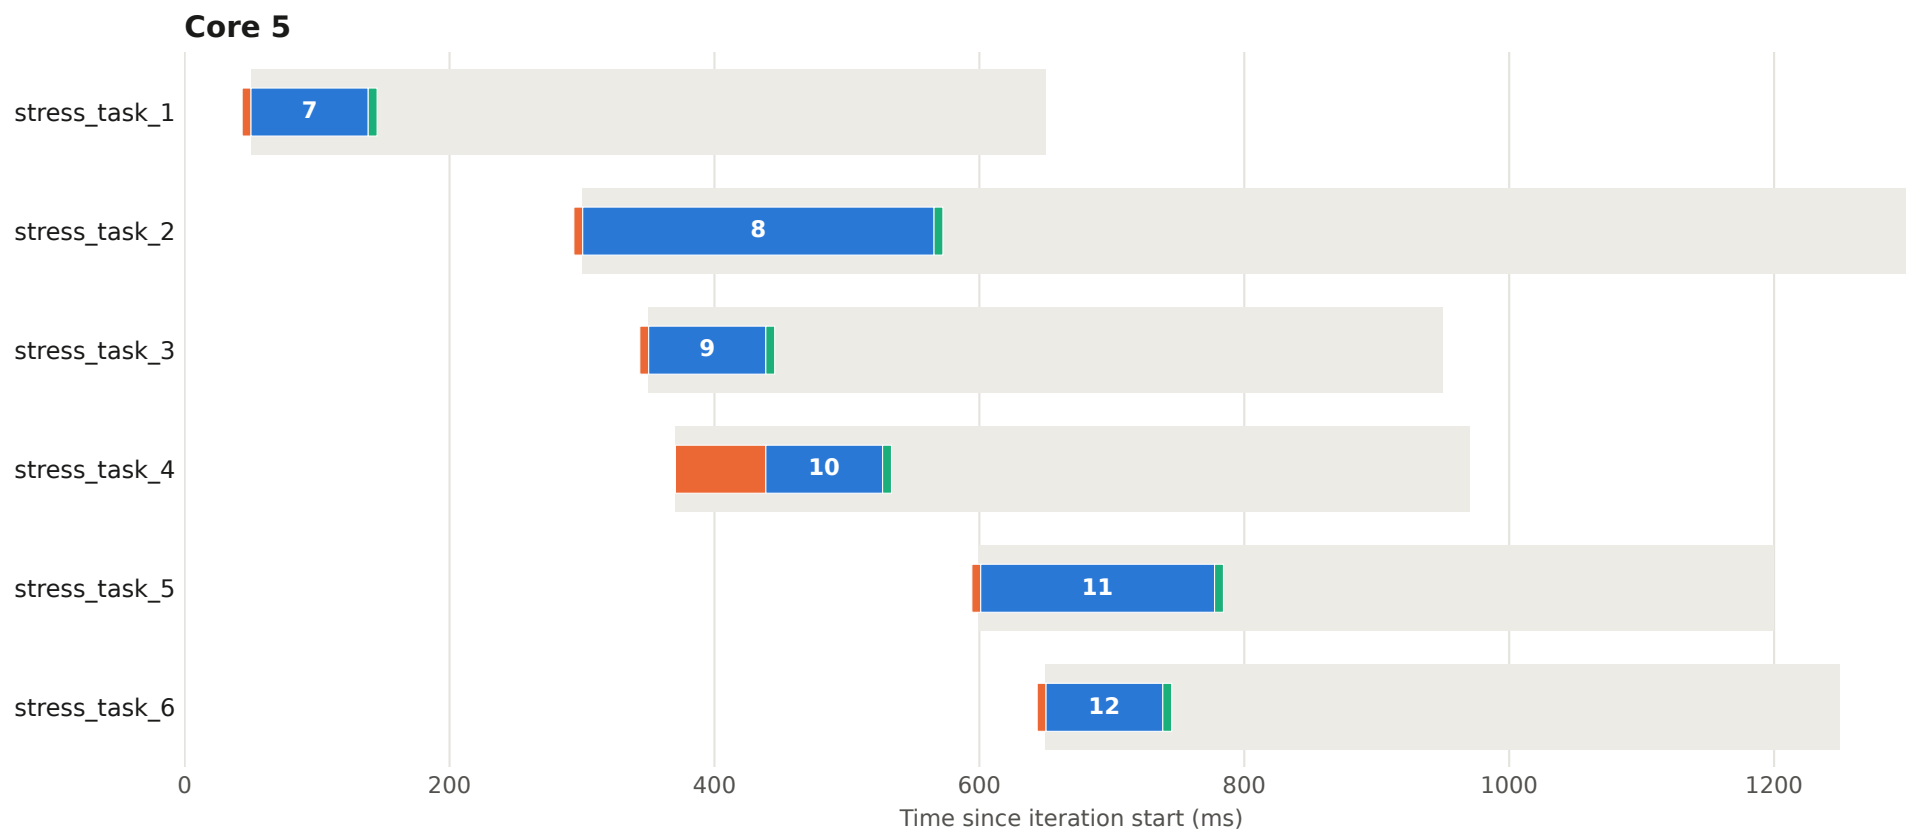


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 93 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

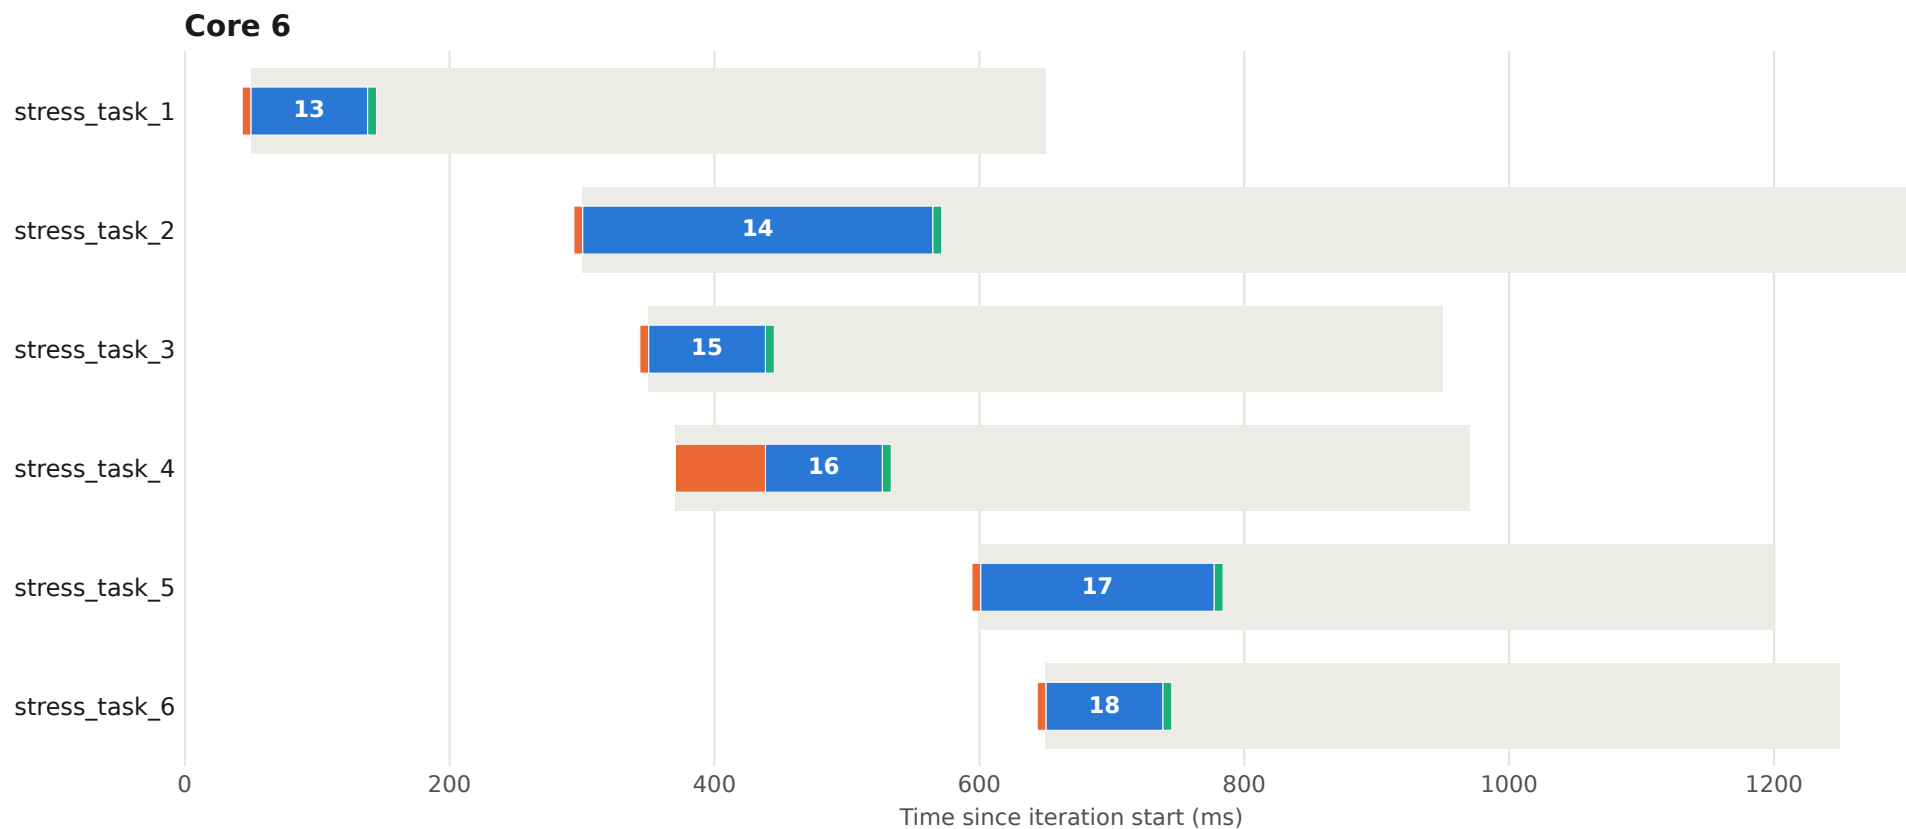


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 93 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

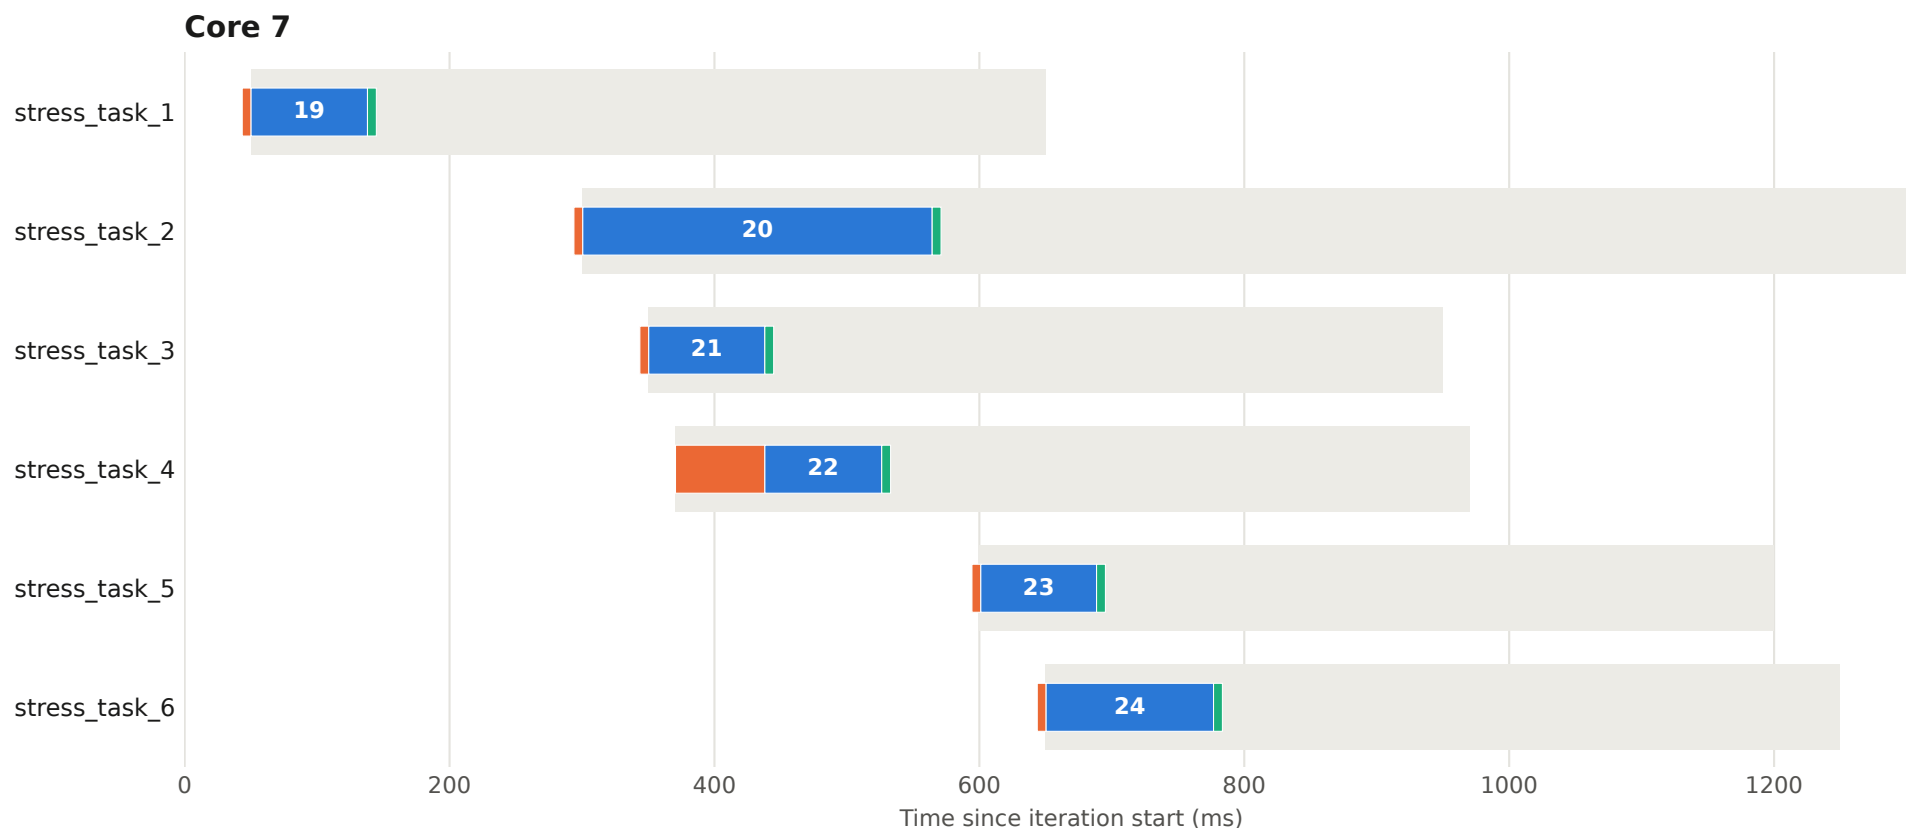


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 94 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

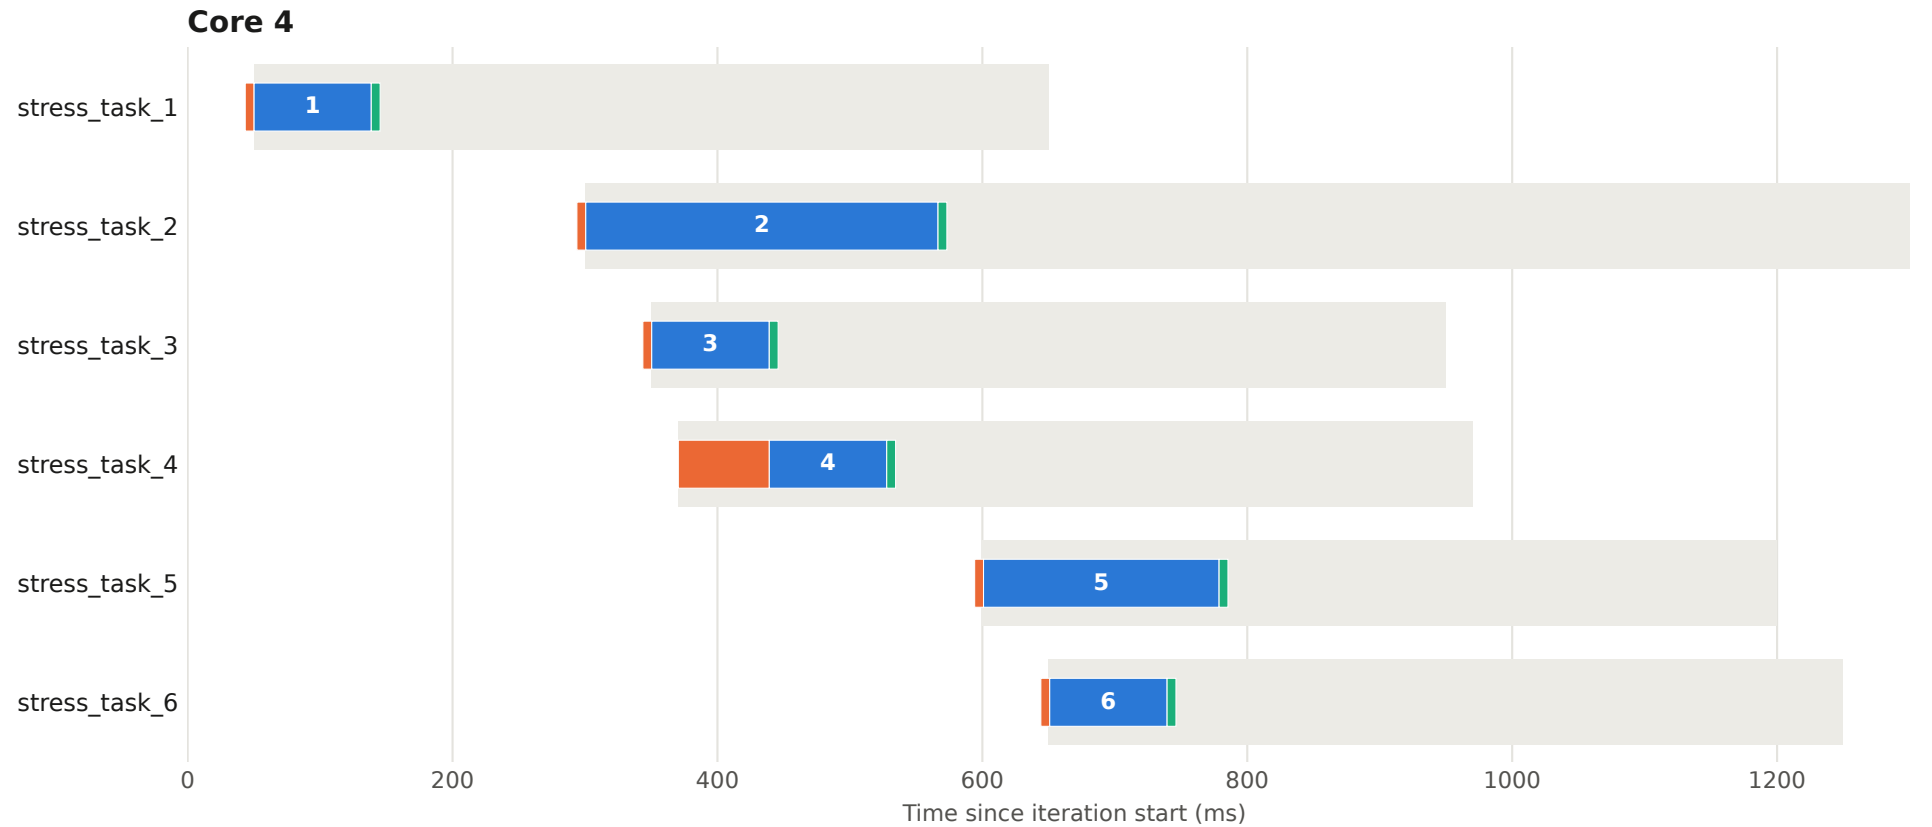


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 94 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

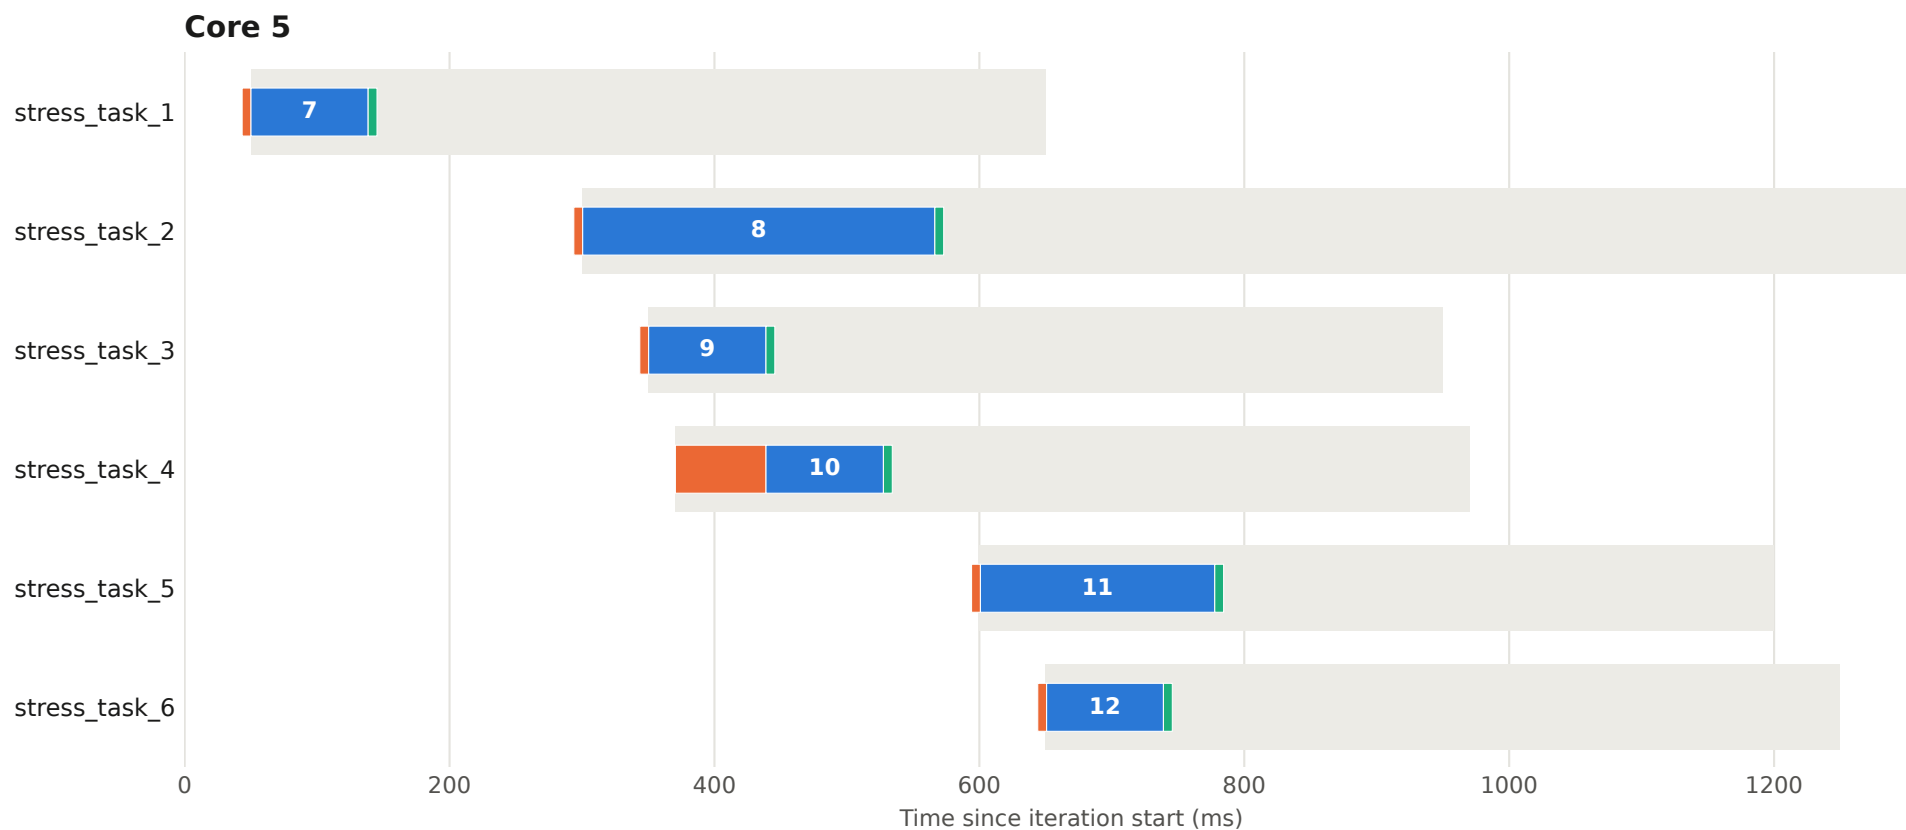


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 94 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

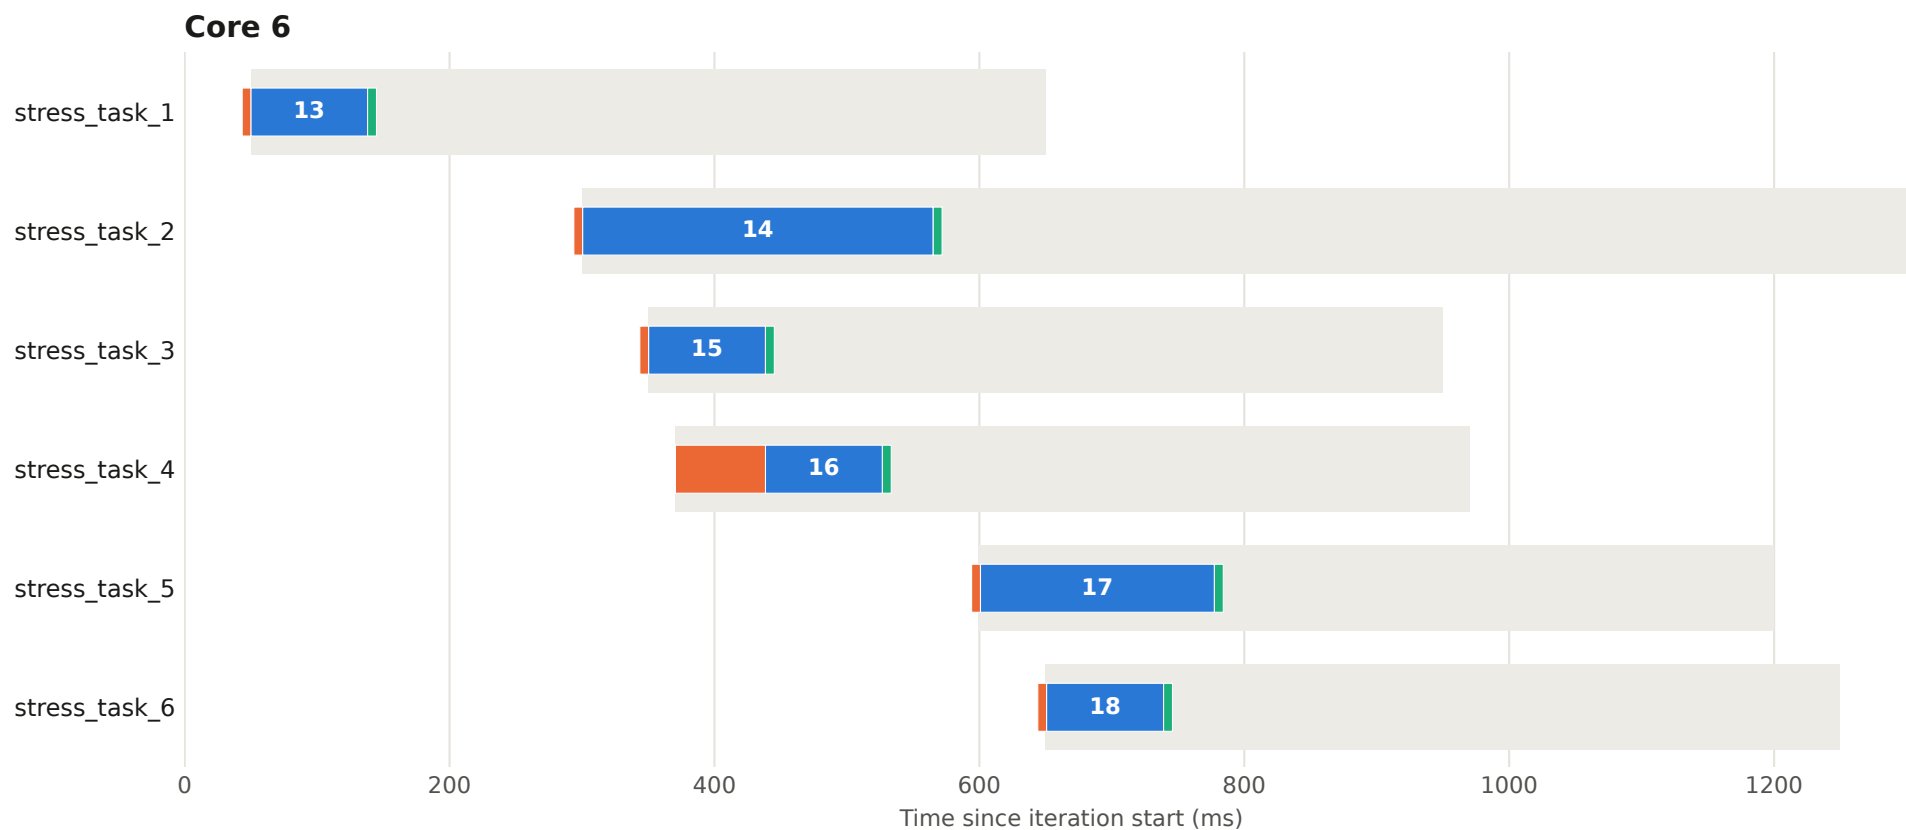


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 94 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

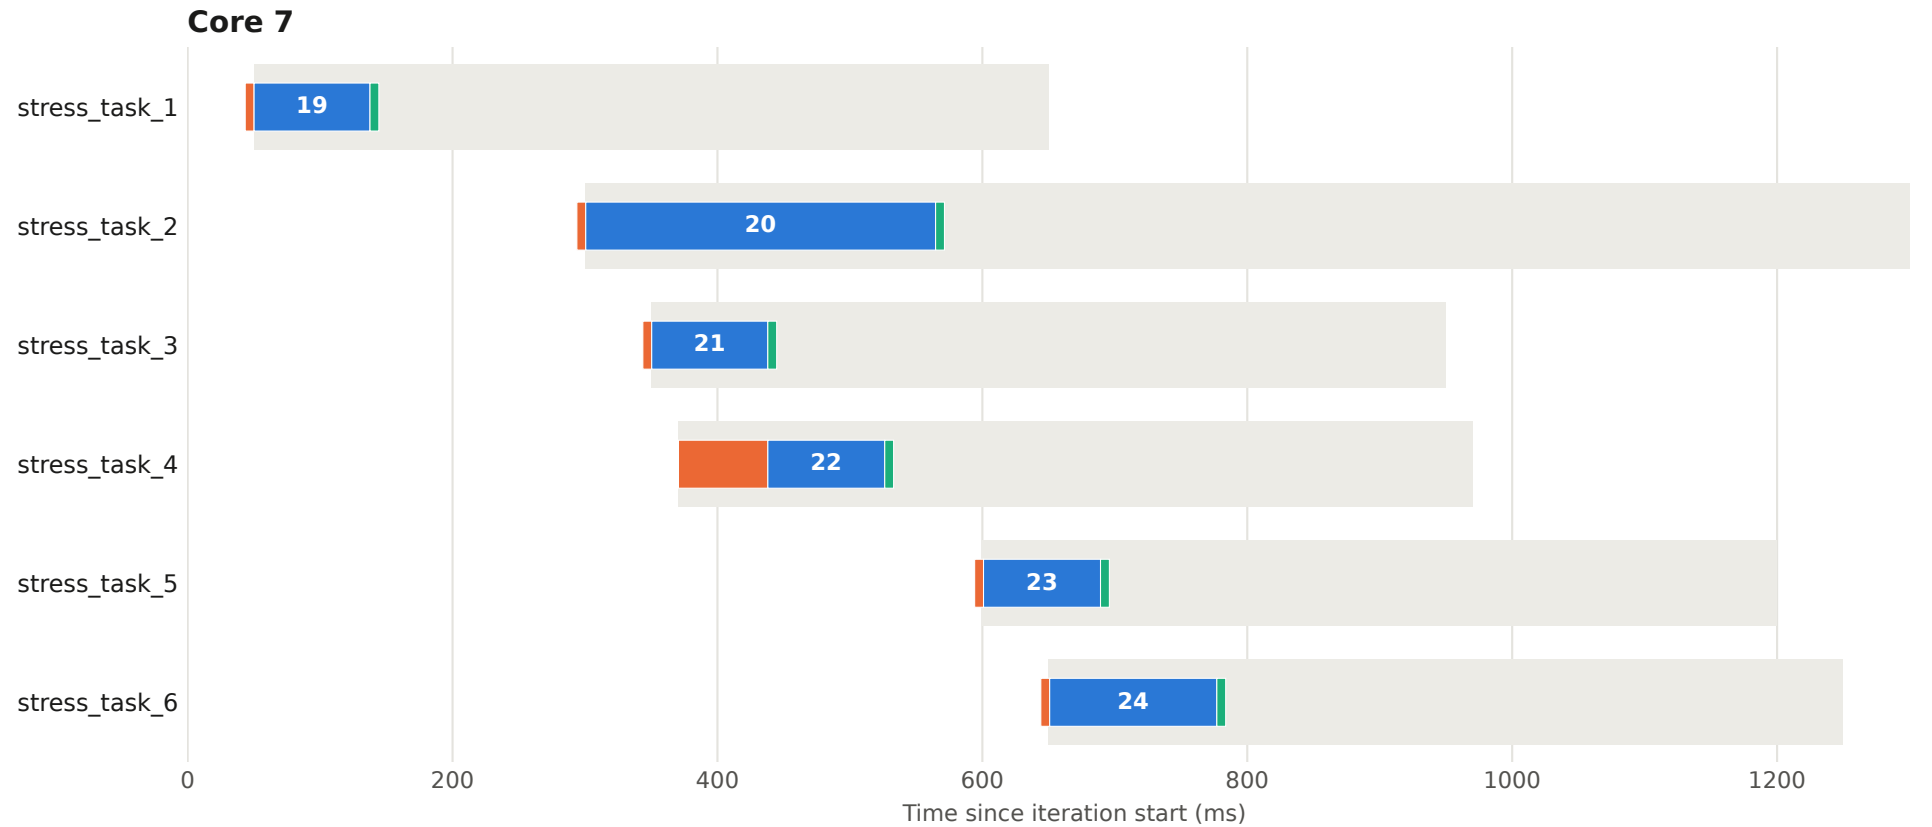


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 95 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

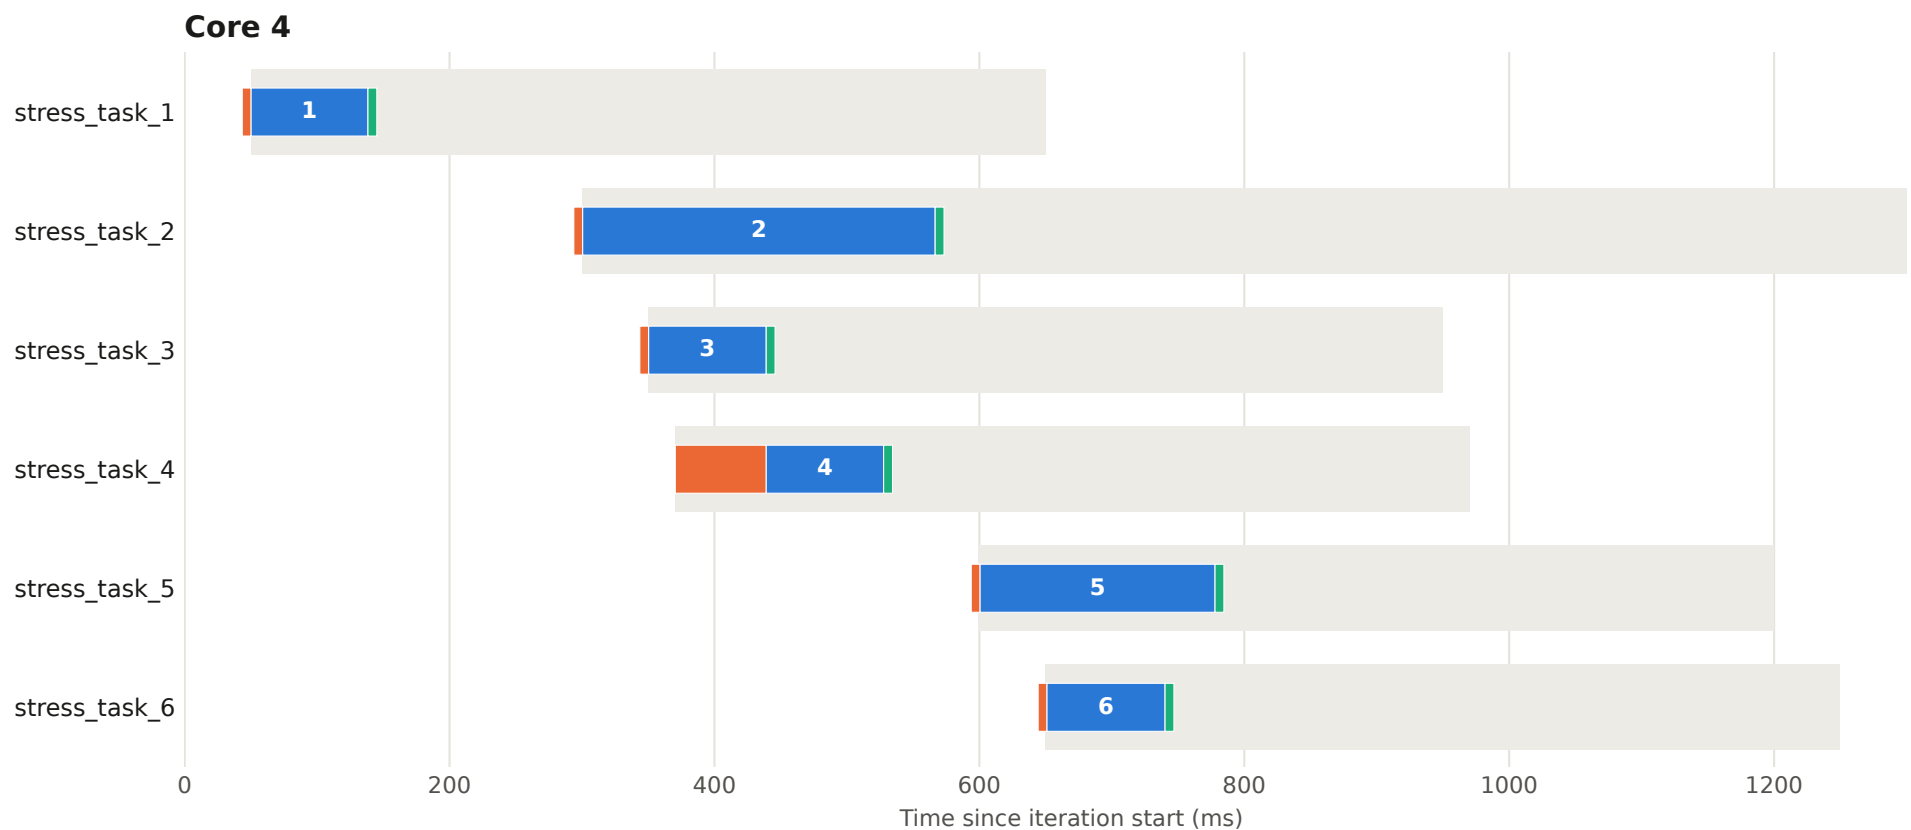


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 95 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

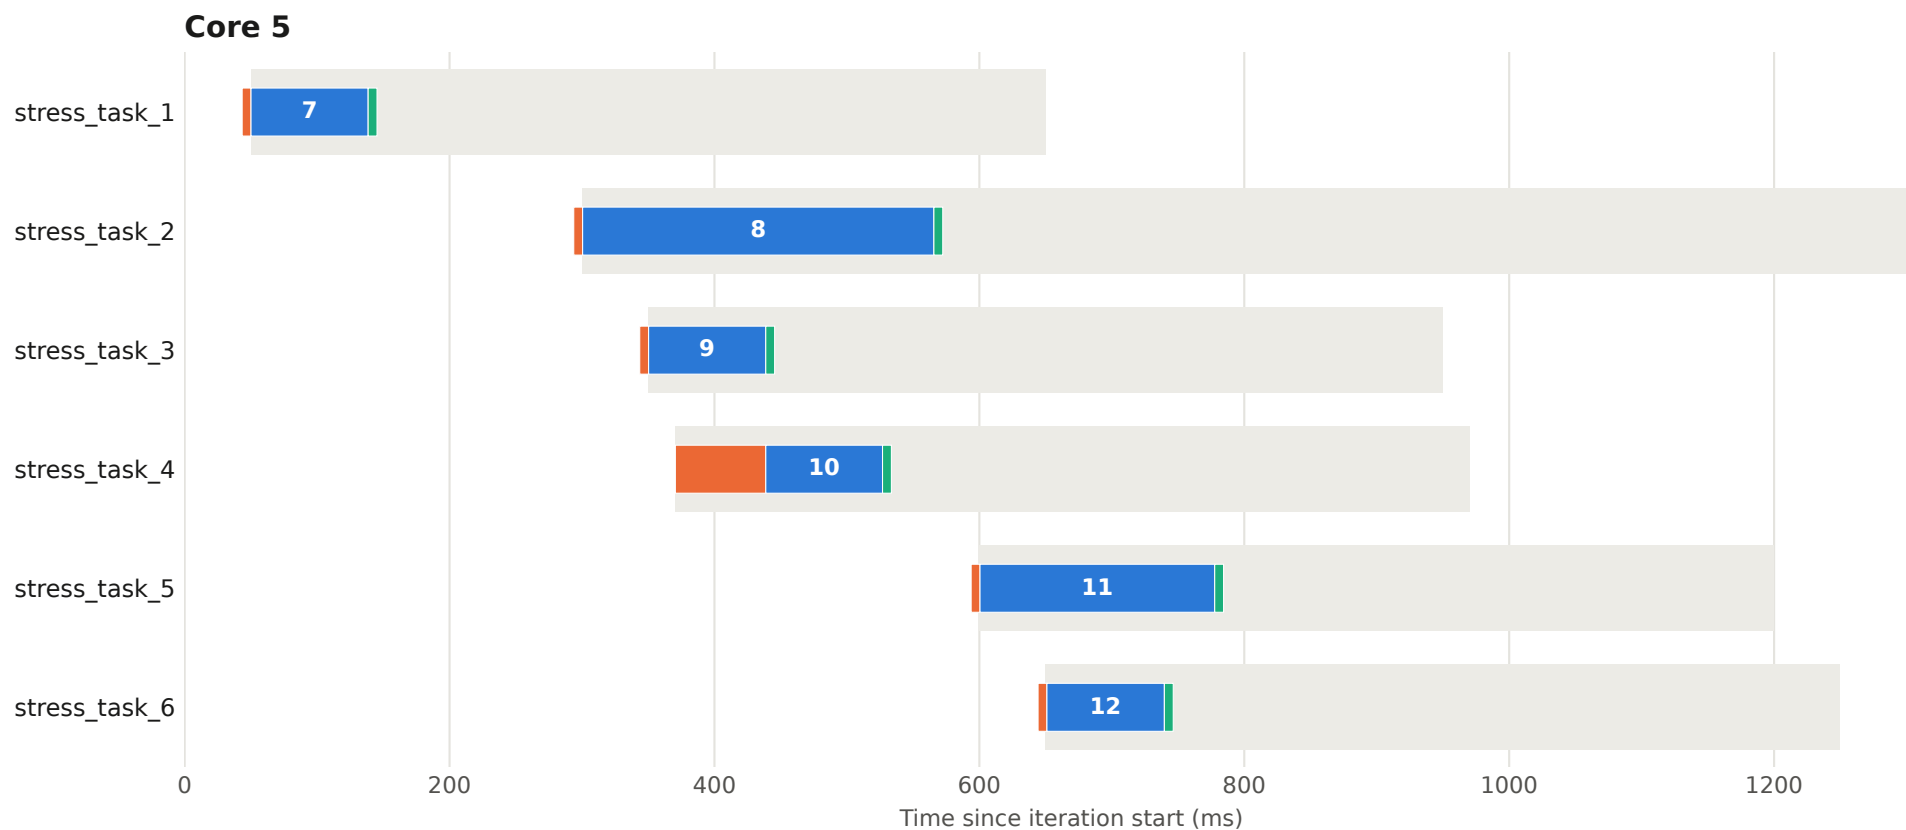


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 95 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

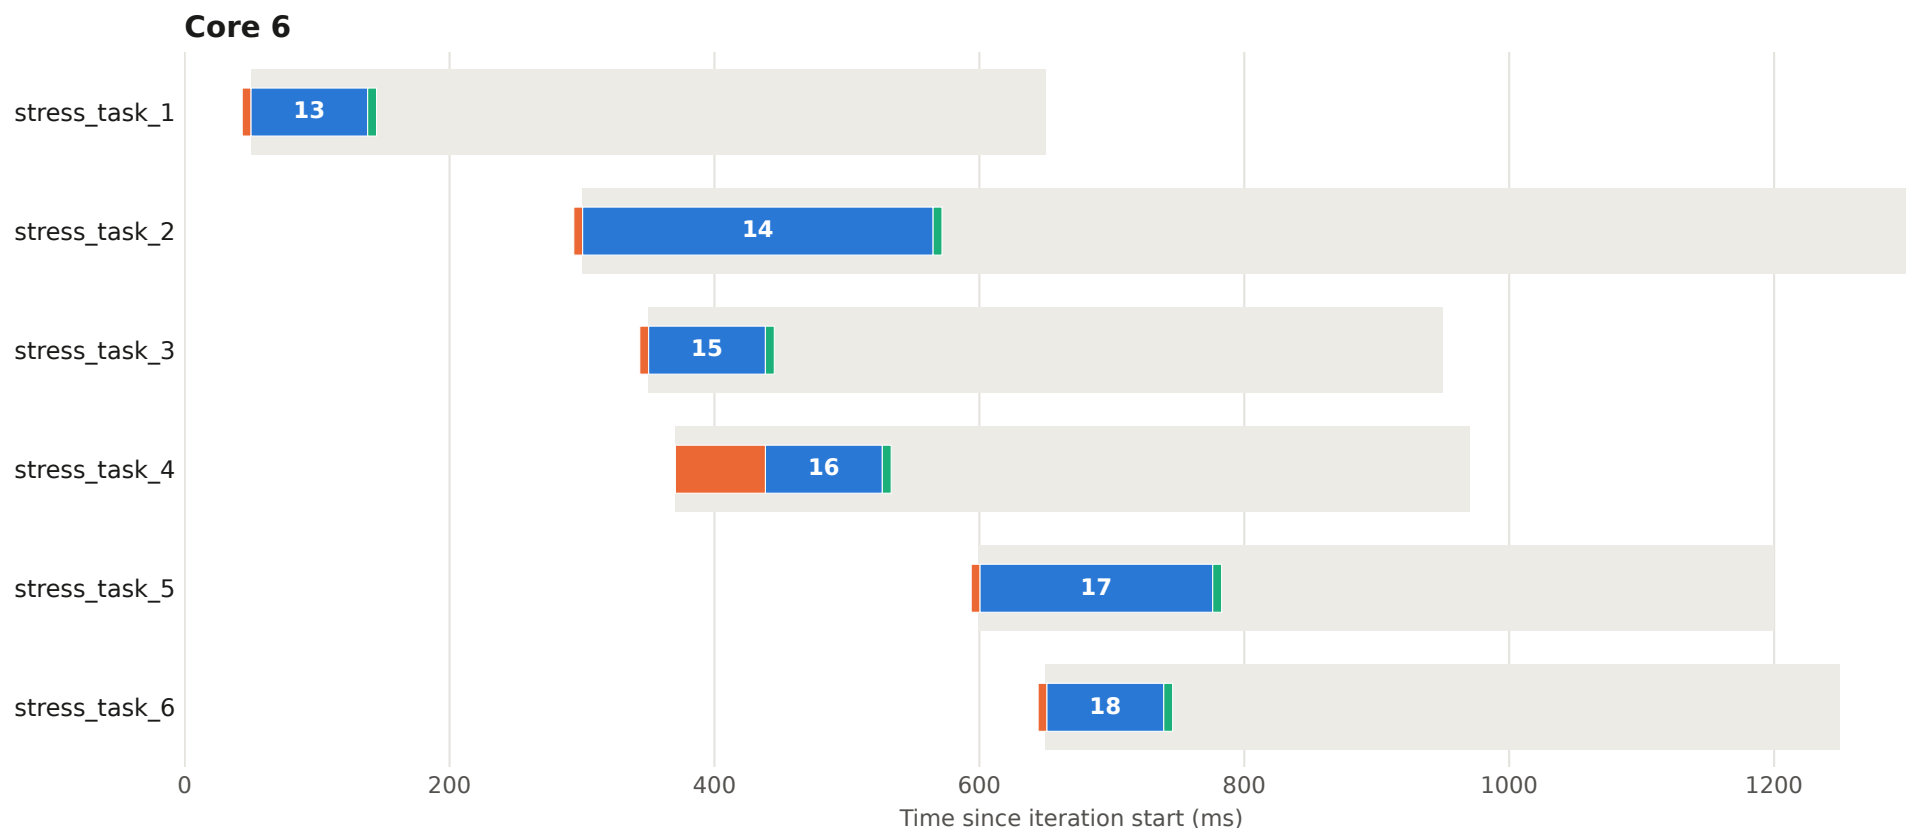


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 95 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

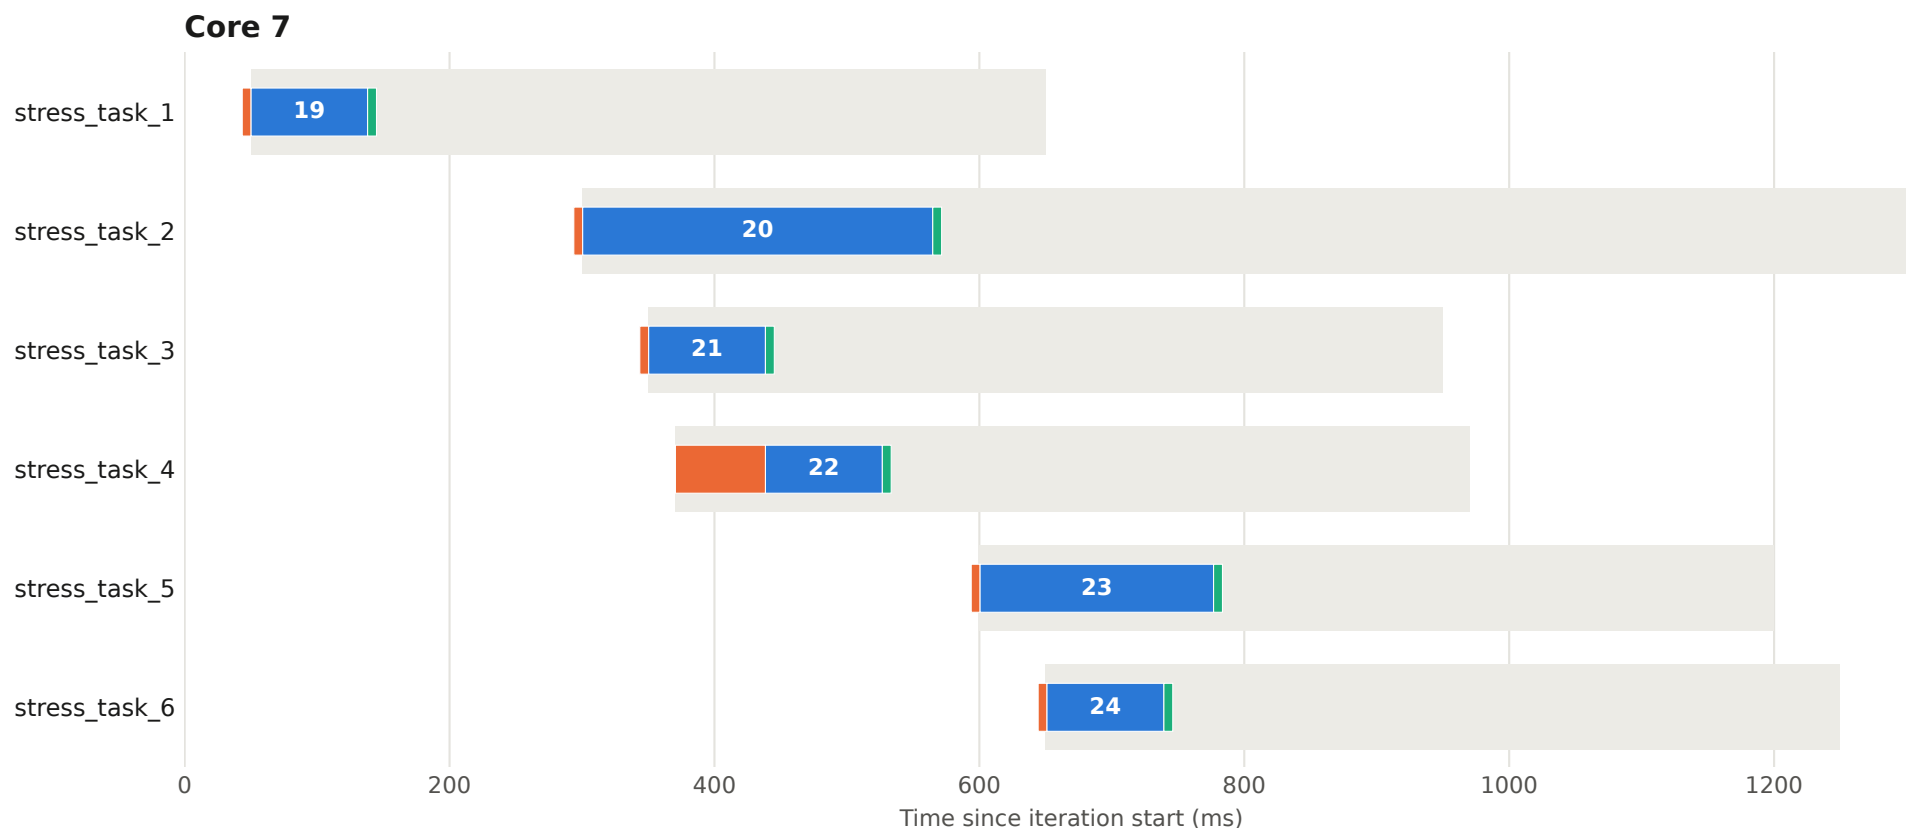


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 96 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

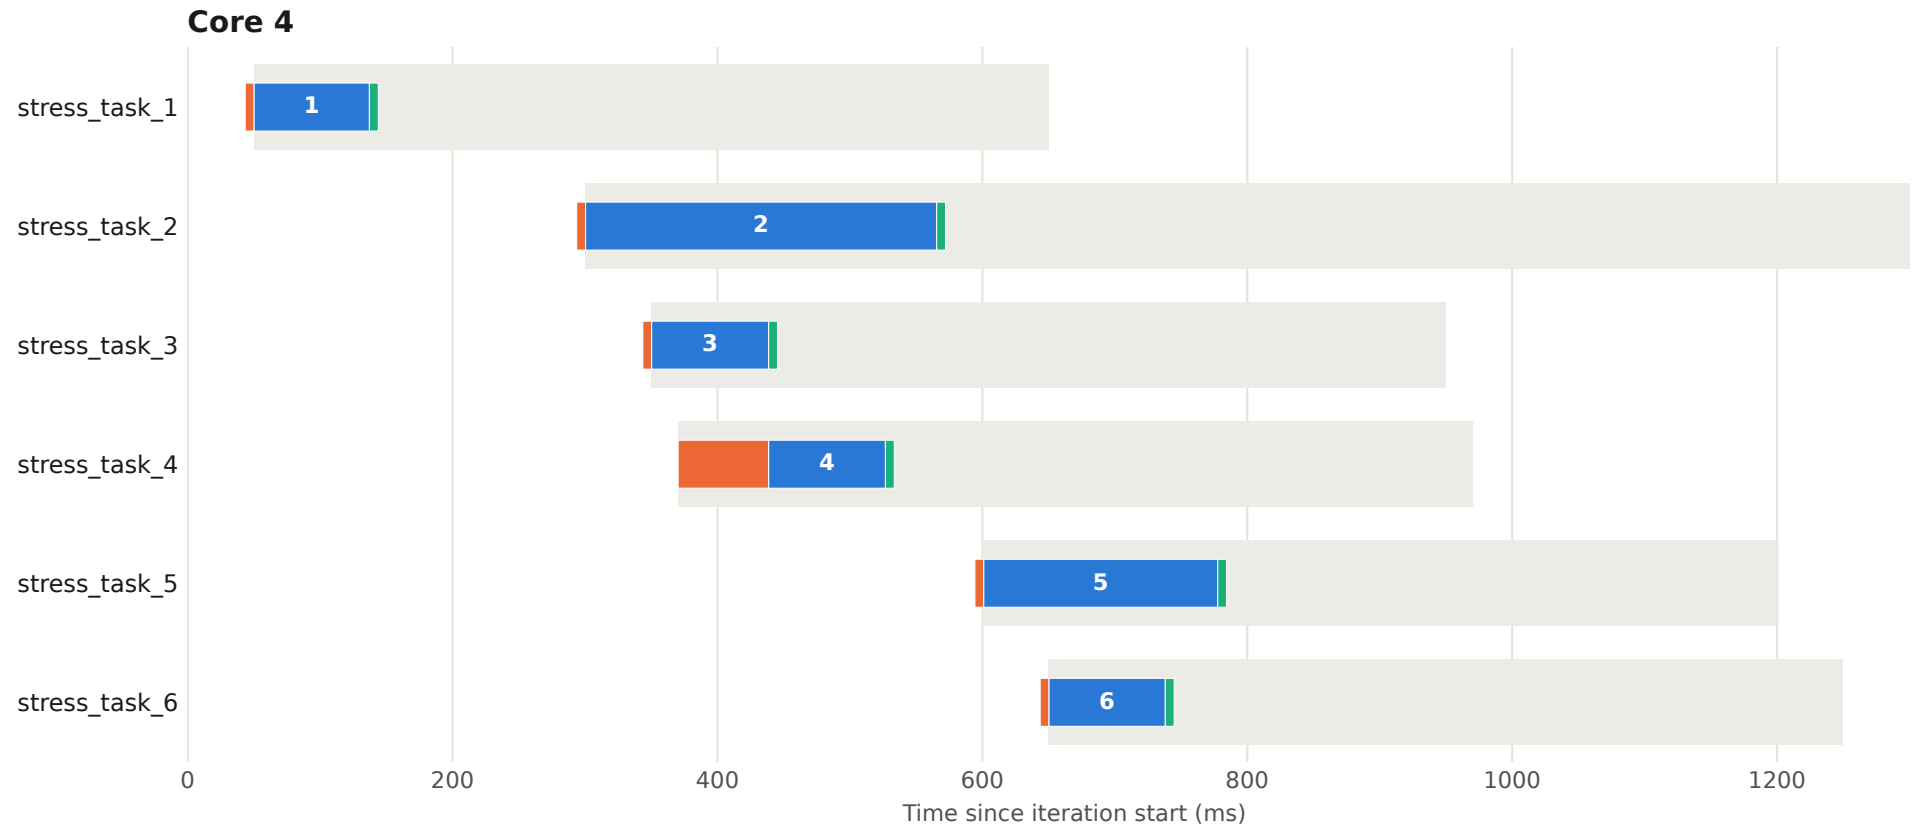


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 96 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

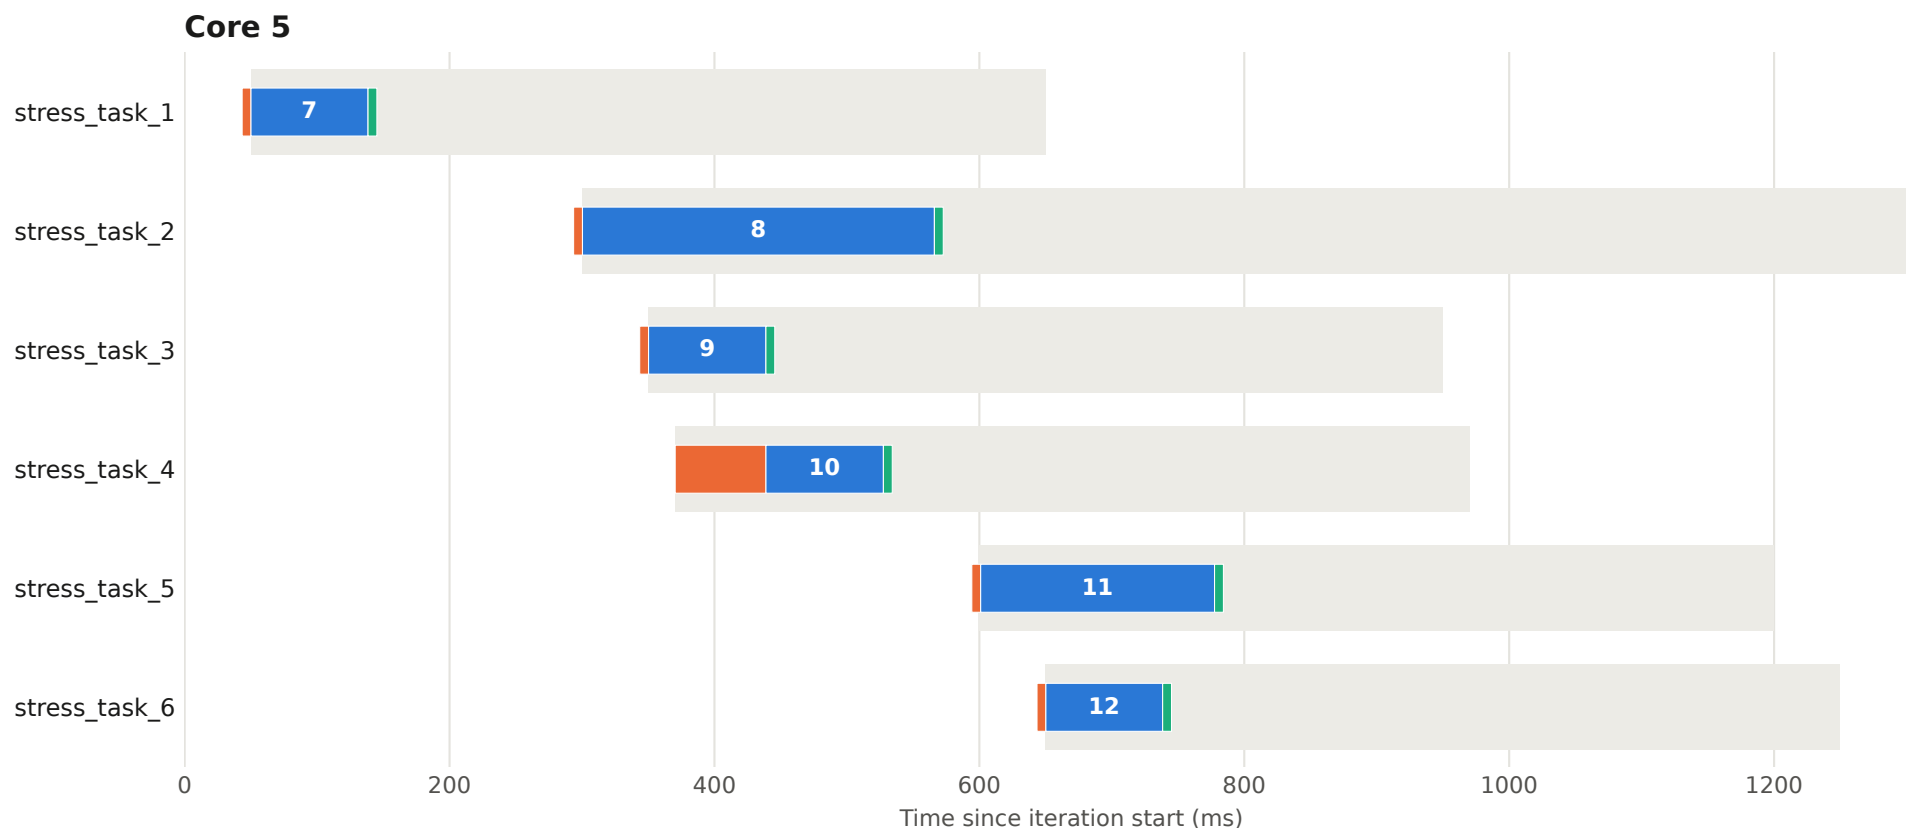


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 96 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

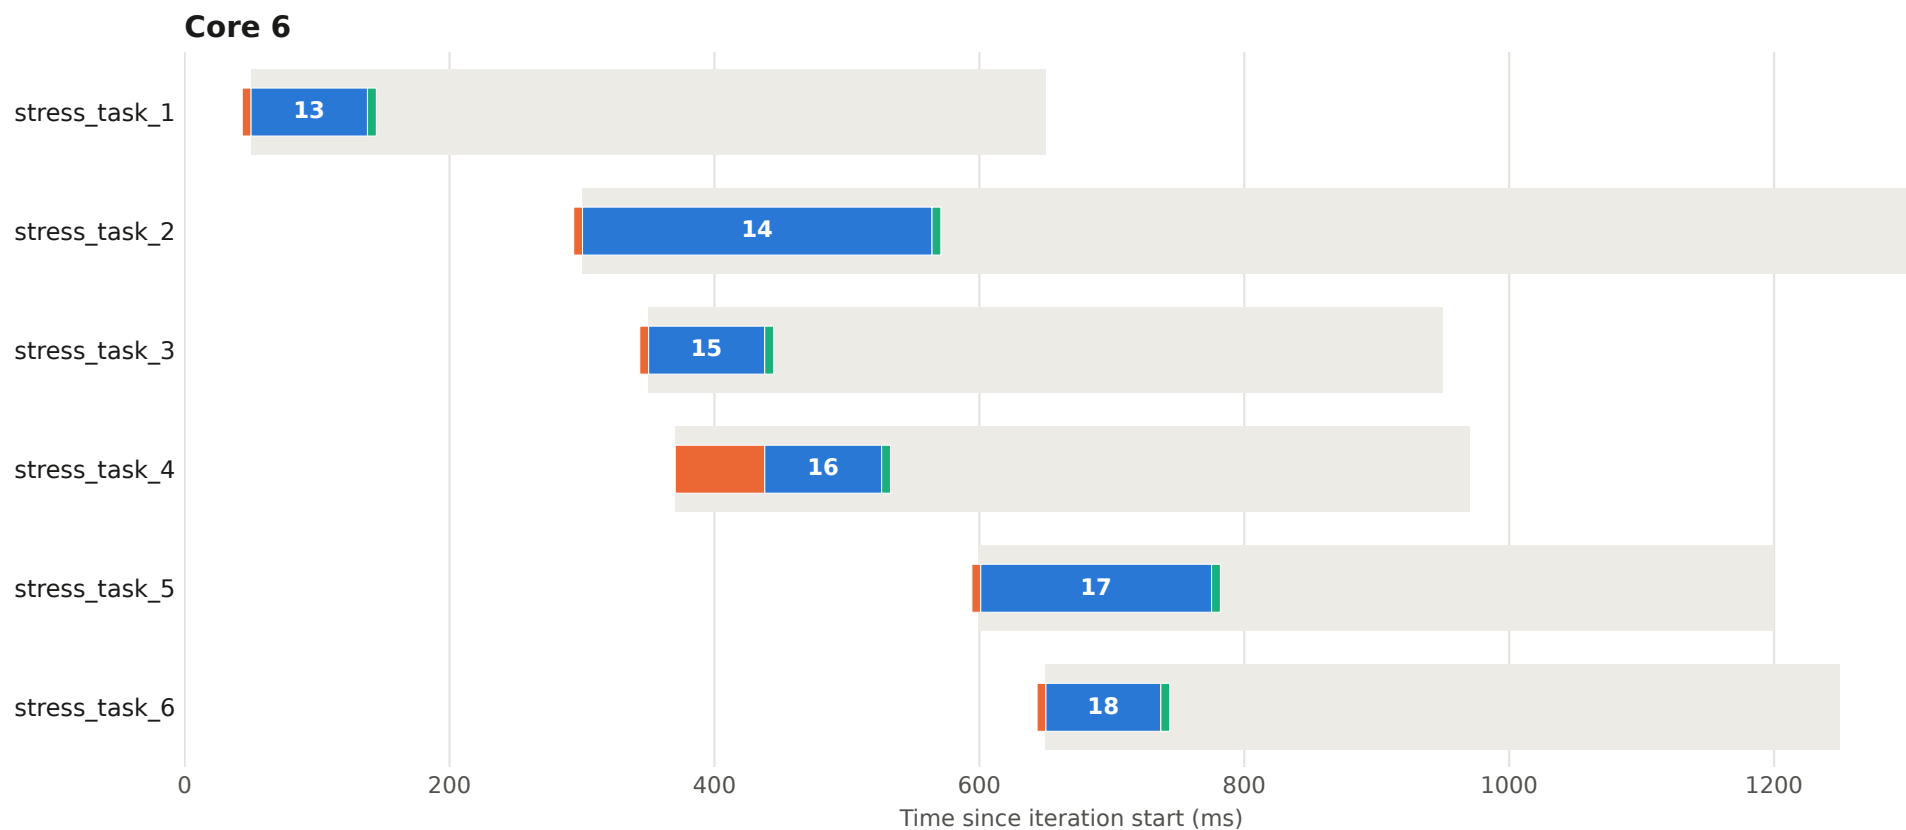


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 96 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

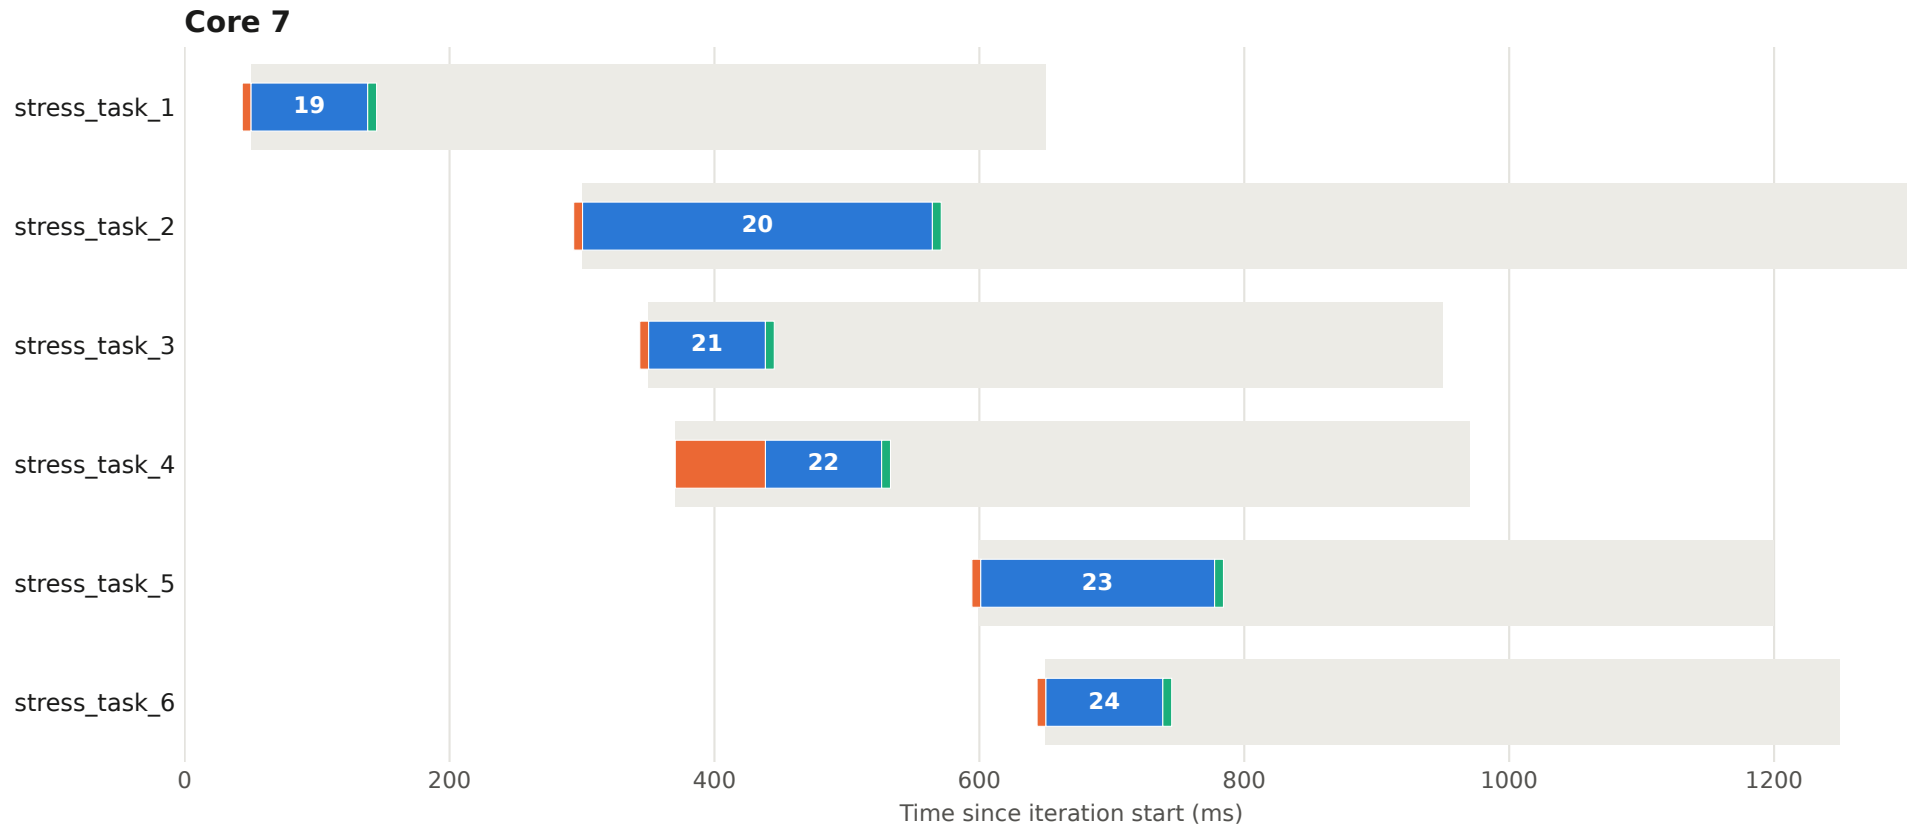


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 97 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

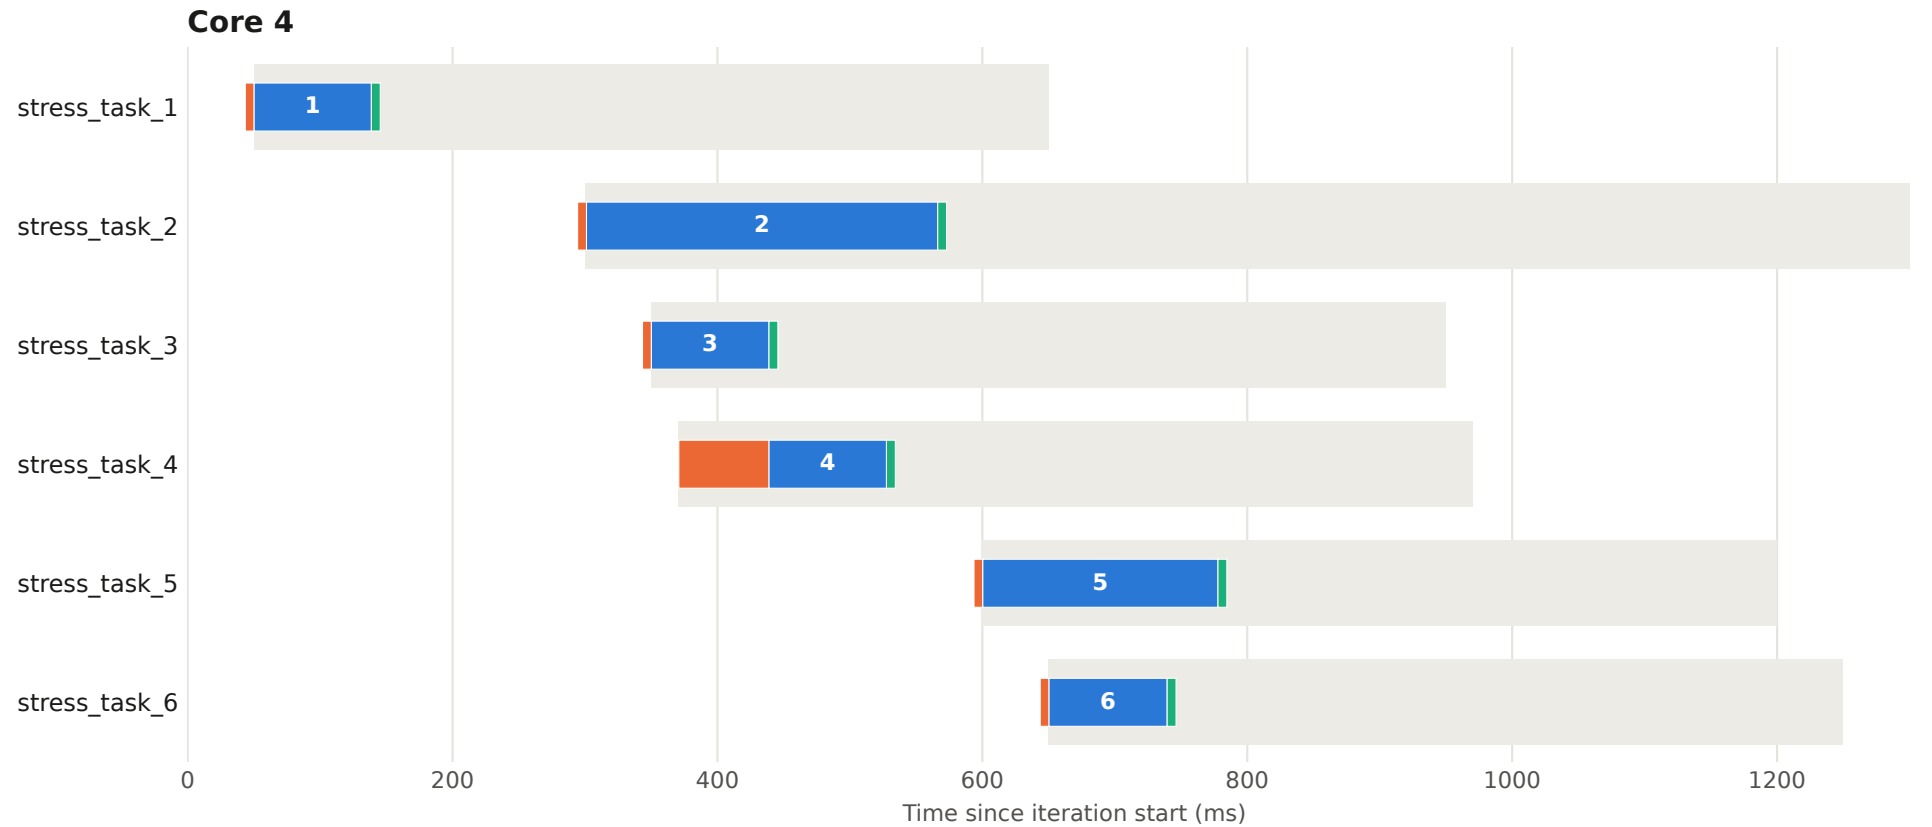


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 97 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

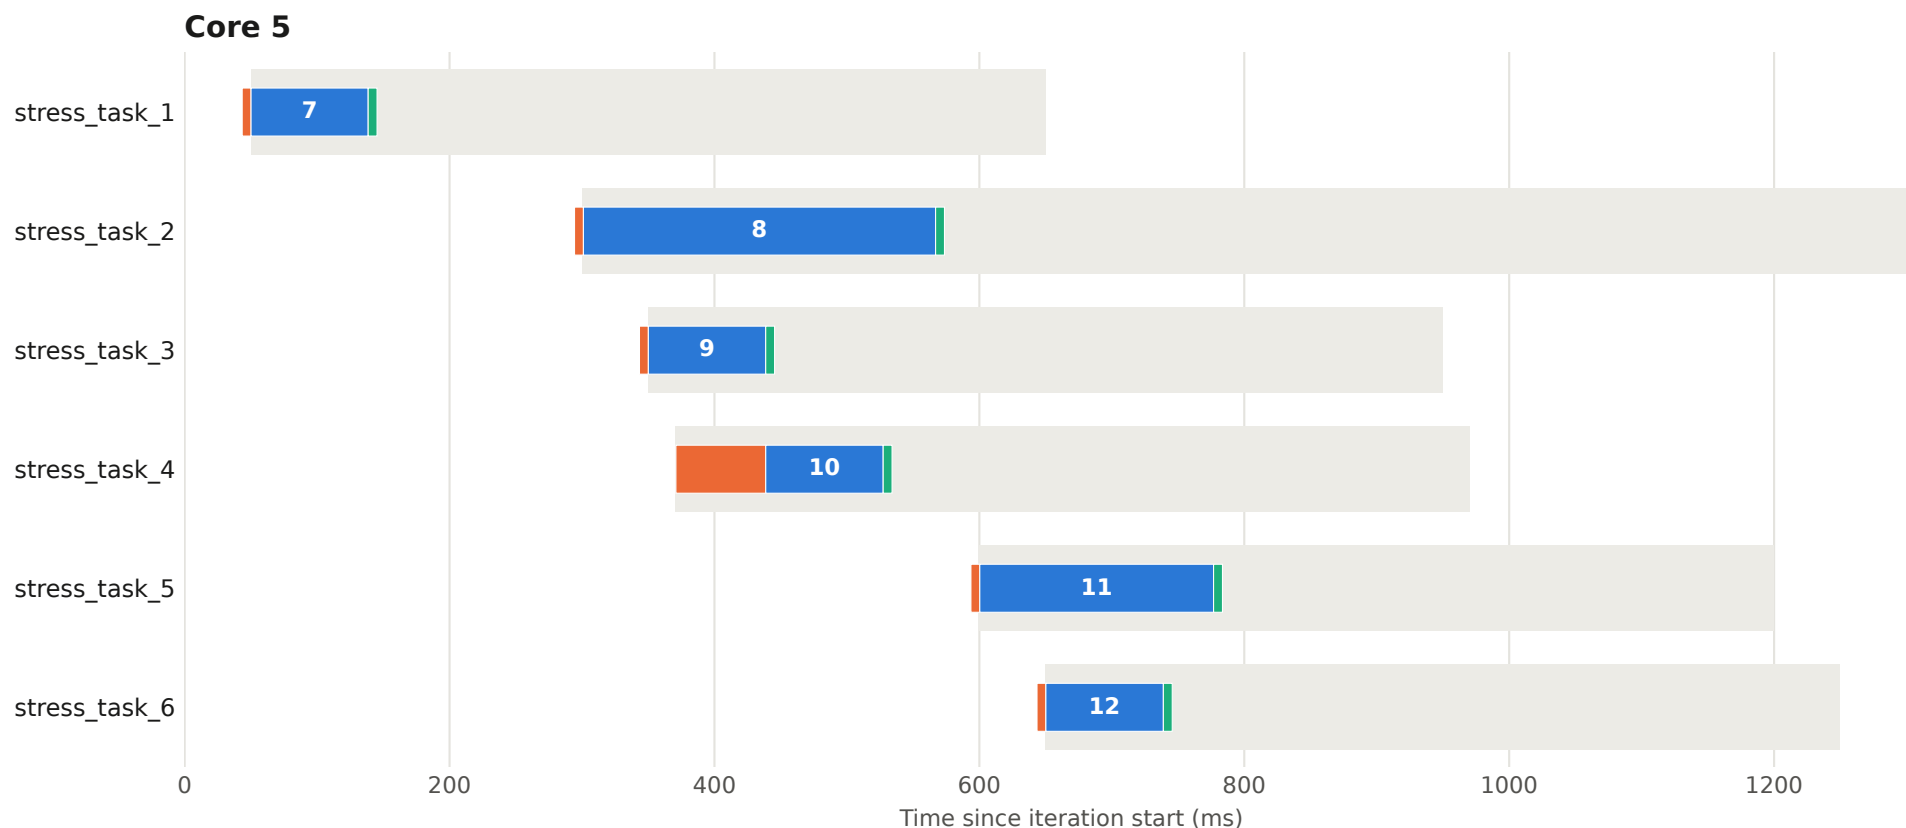


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 97 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

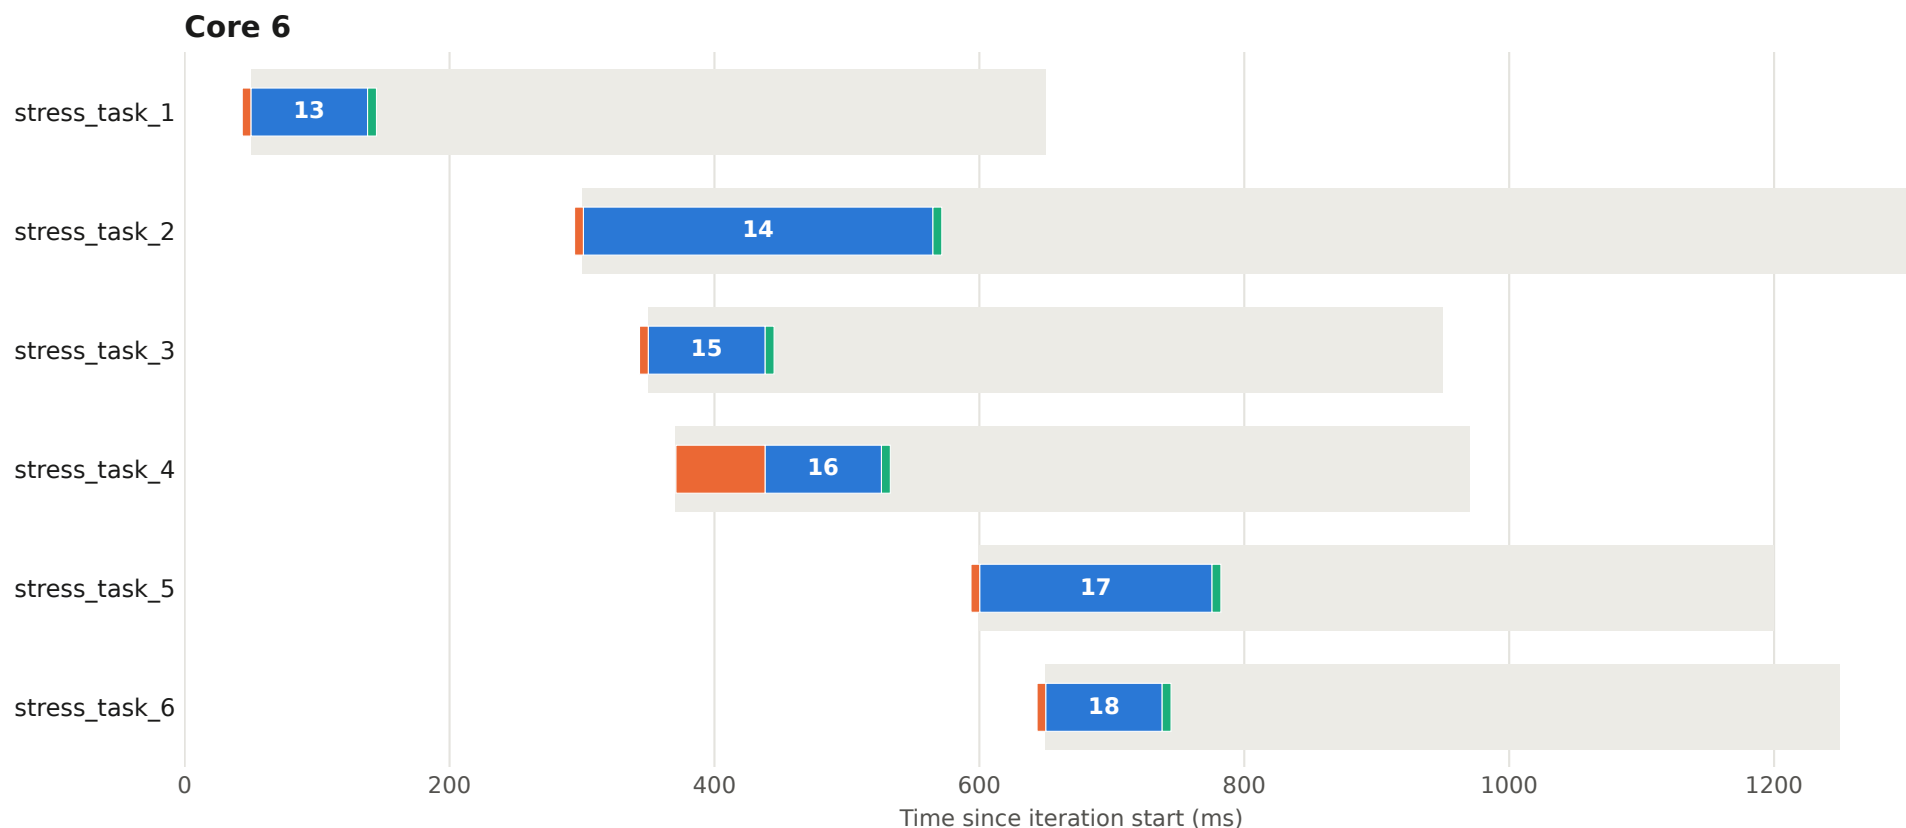


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 97 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

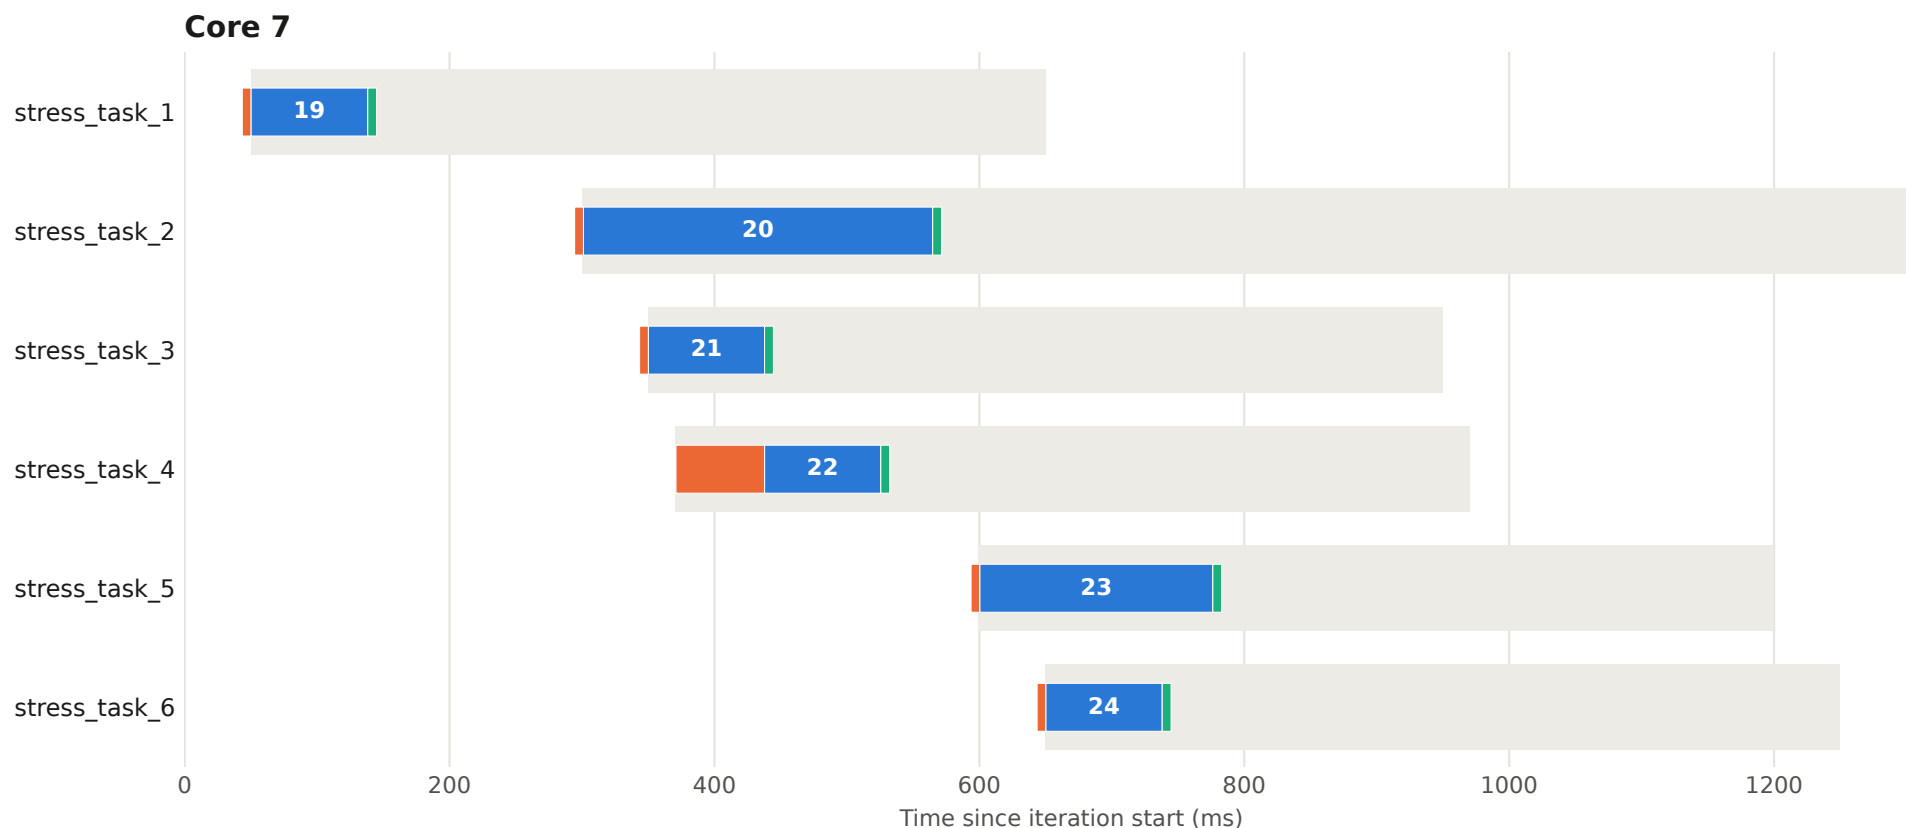


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.



# Execution plan - iteration 98 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

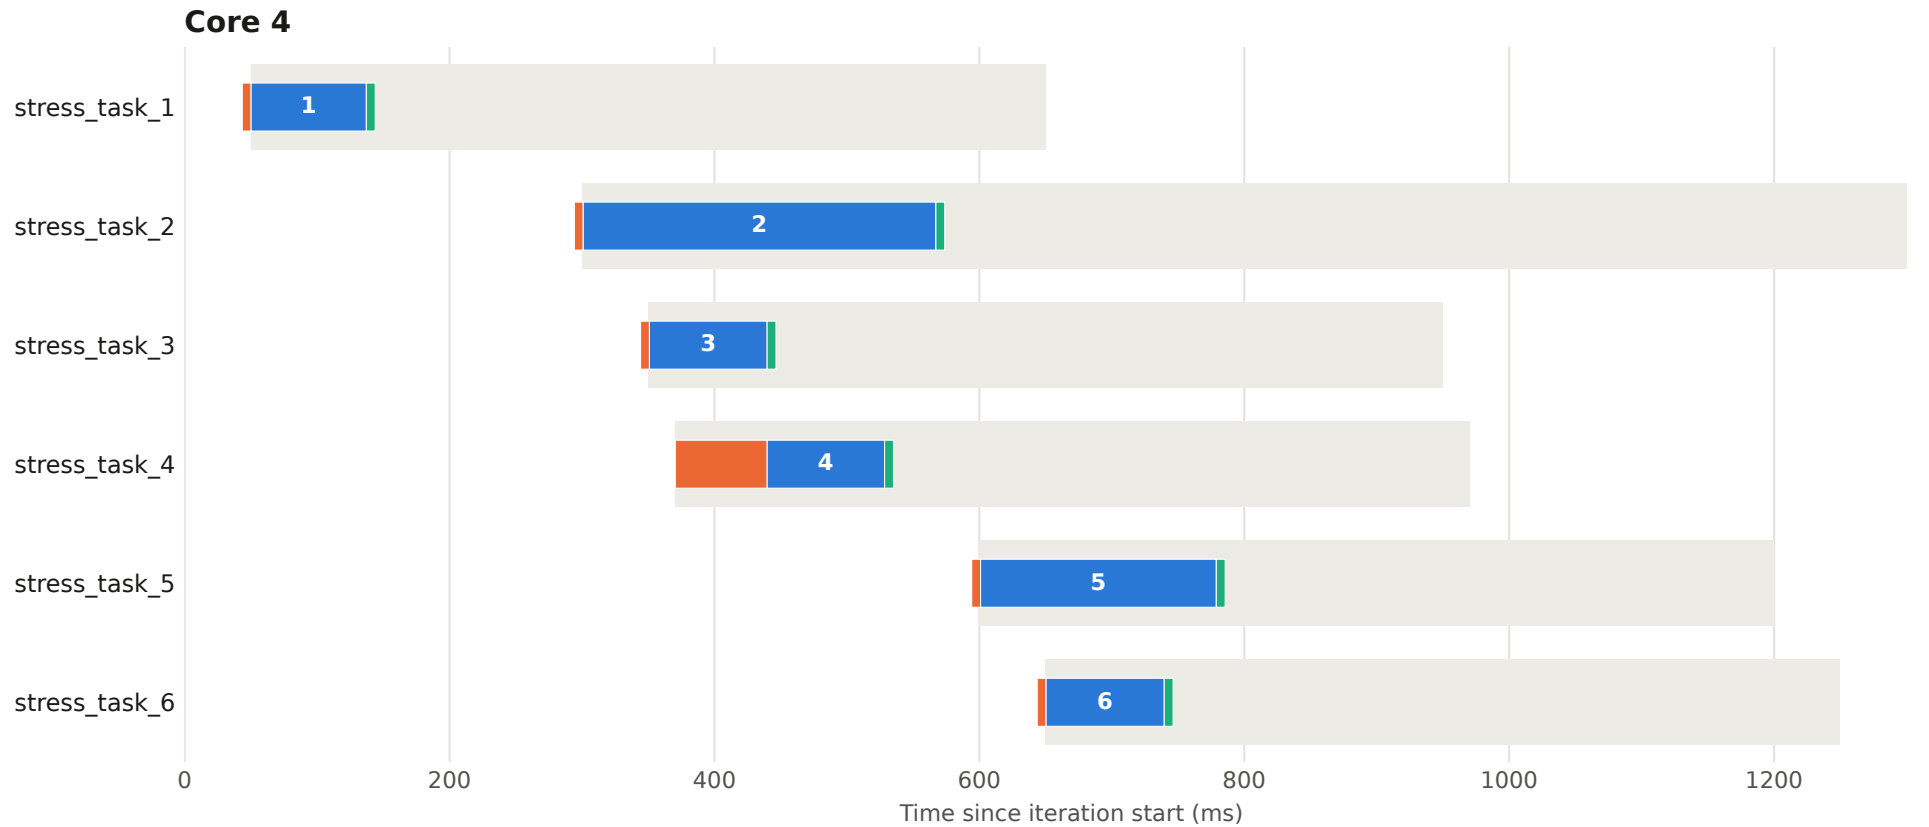


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 98 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

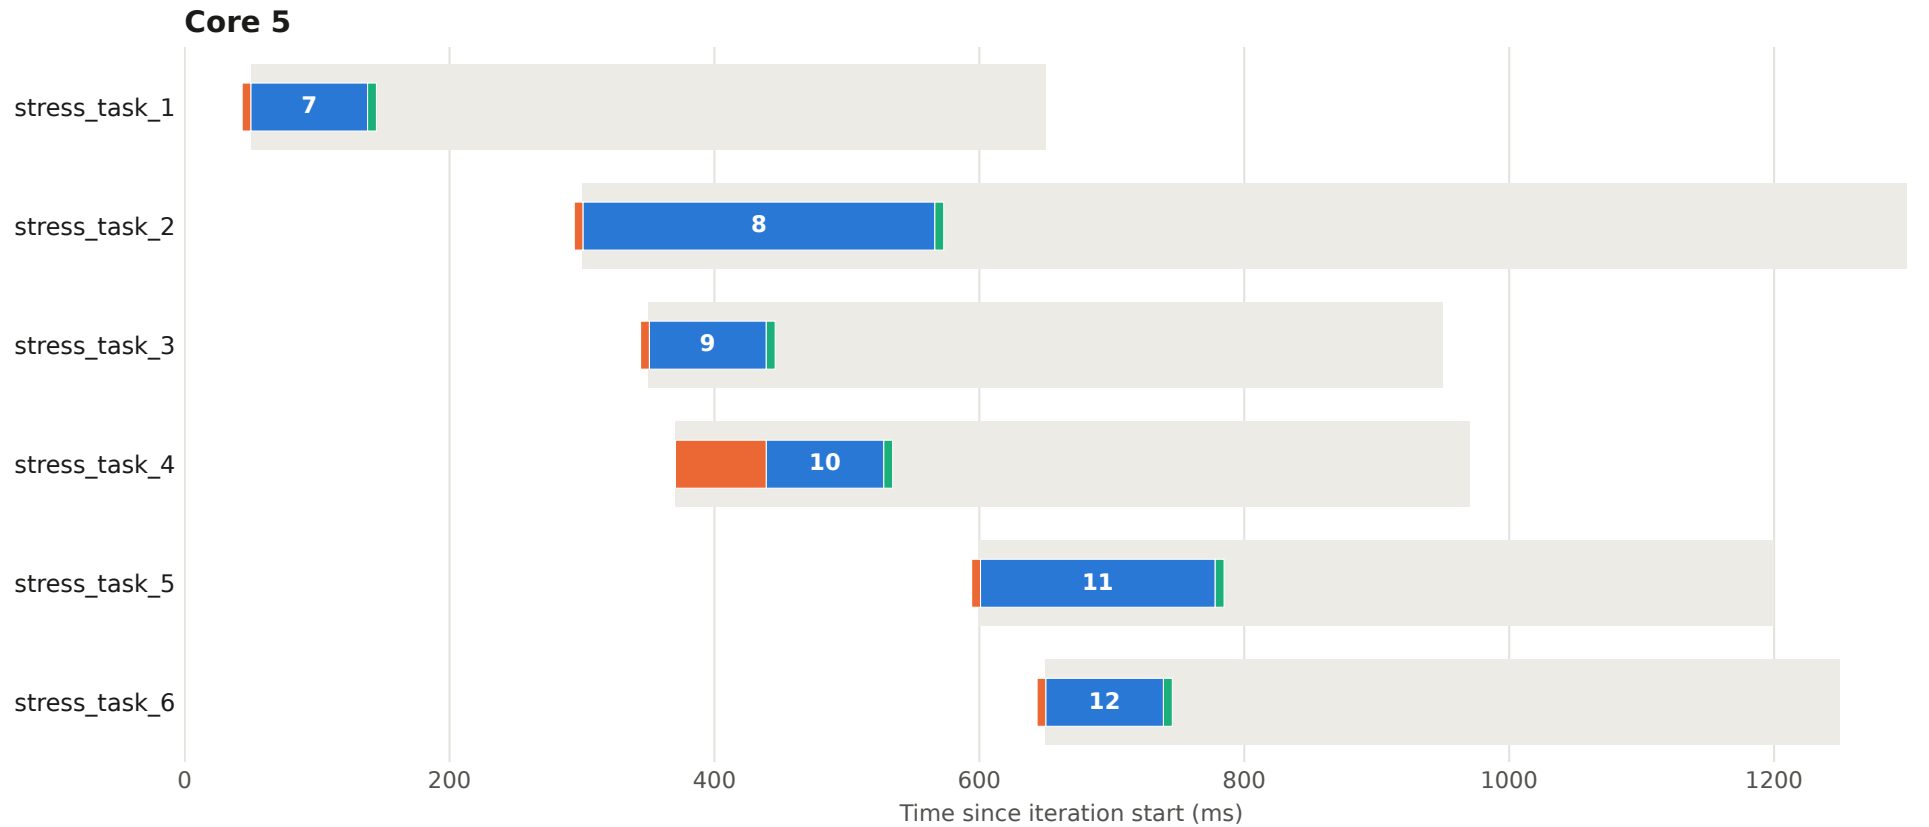


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 98 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

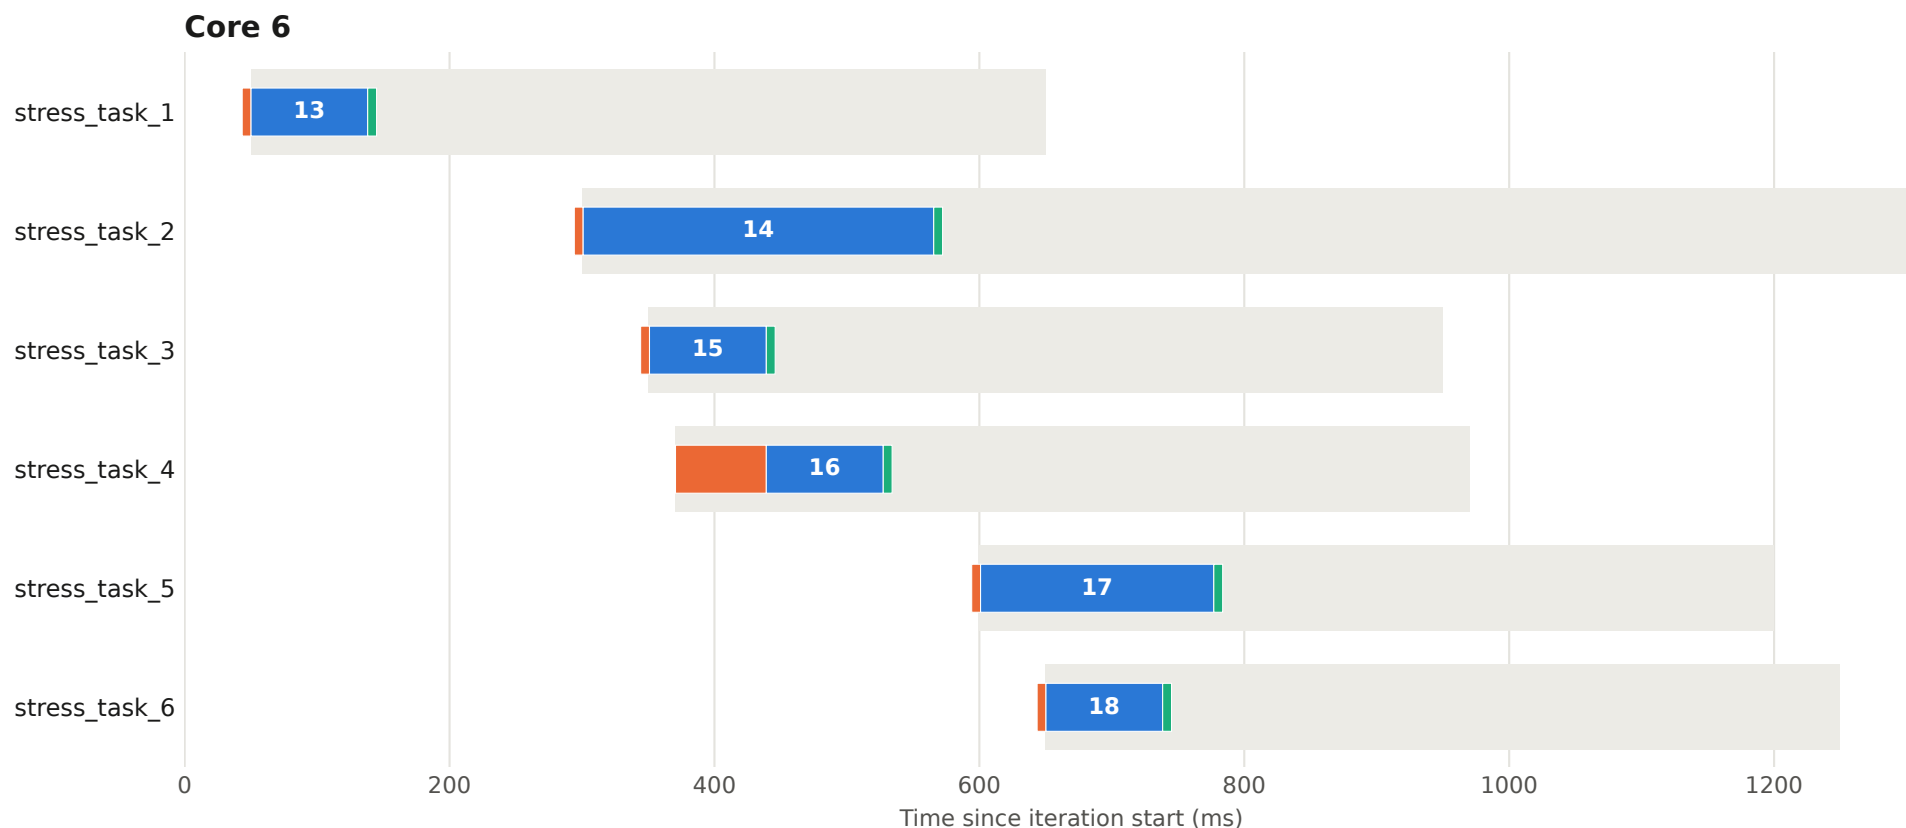


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 98 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

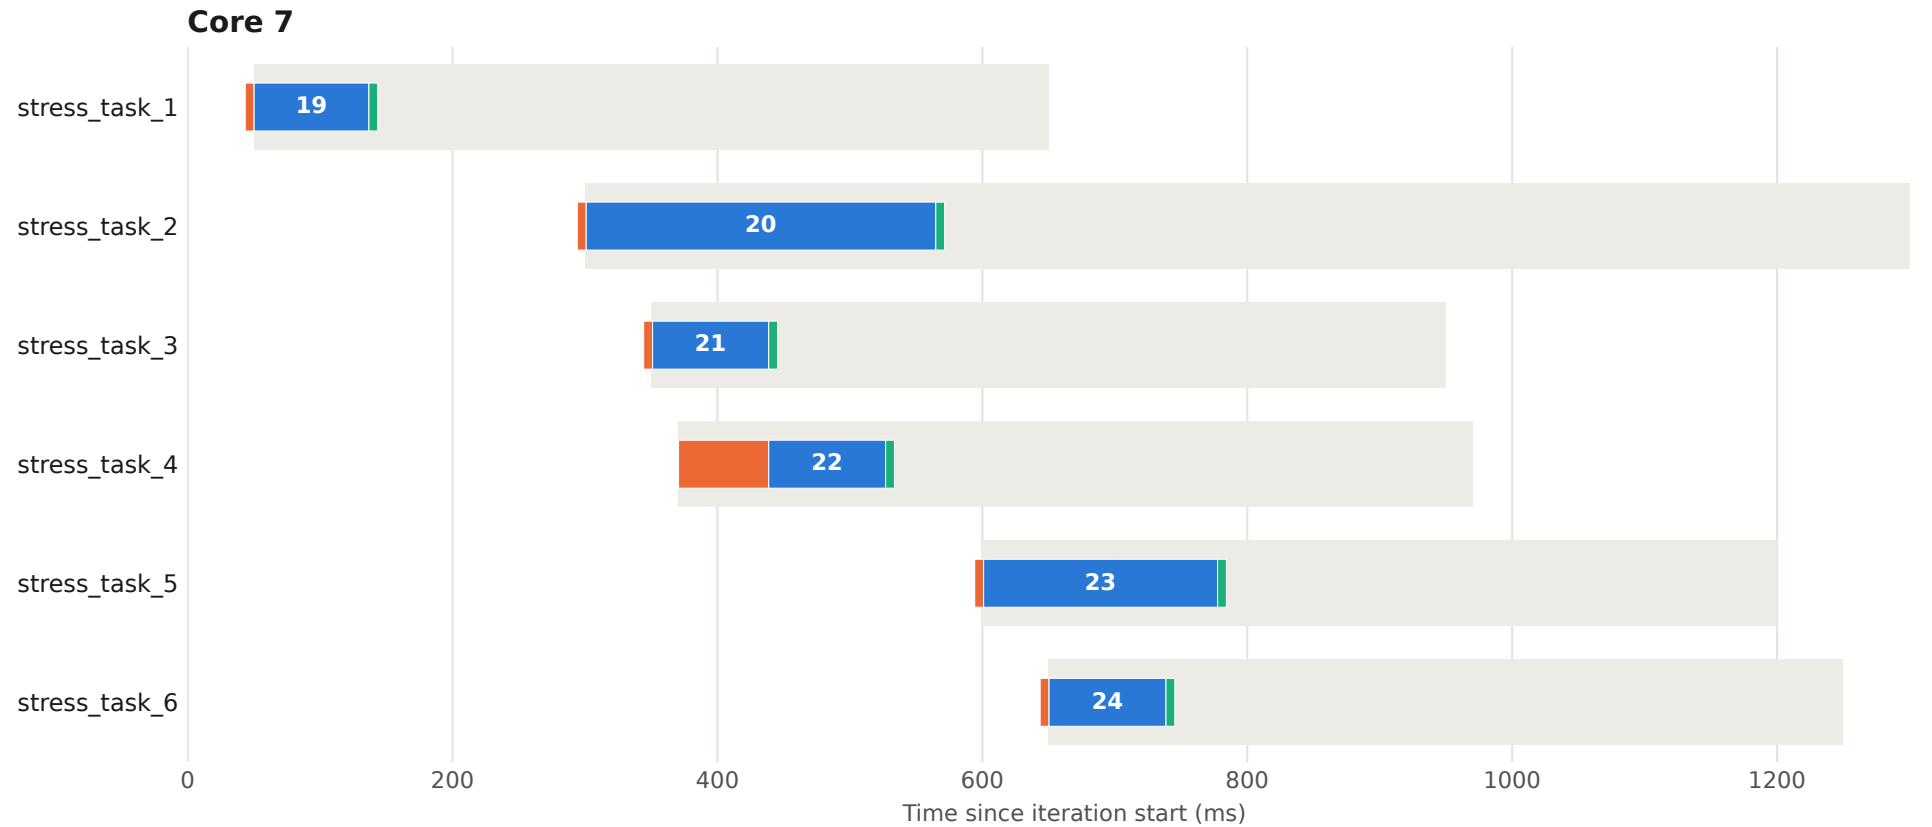


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 99 - core 4

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

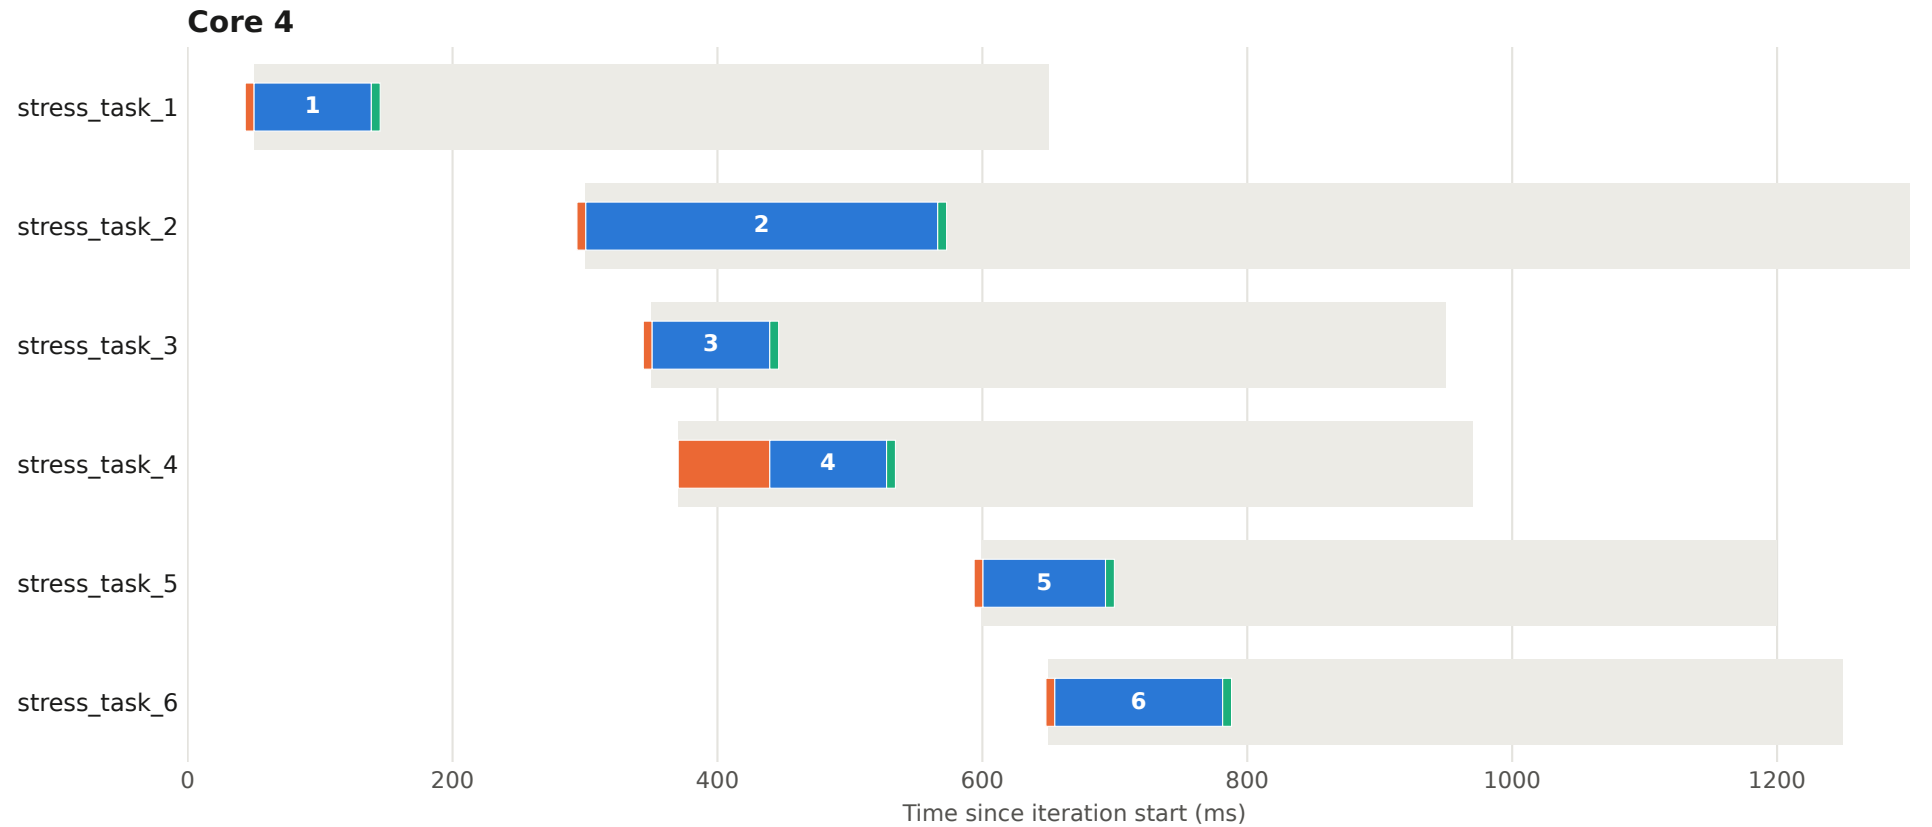


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 99 - core 5

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

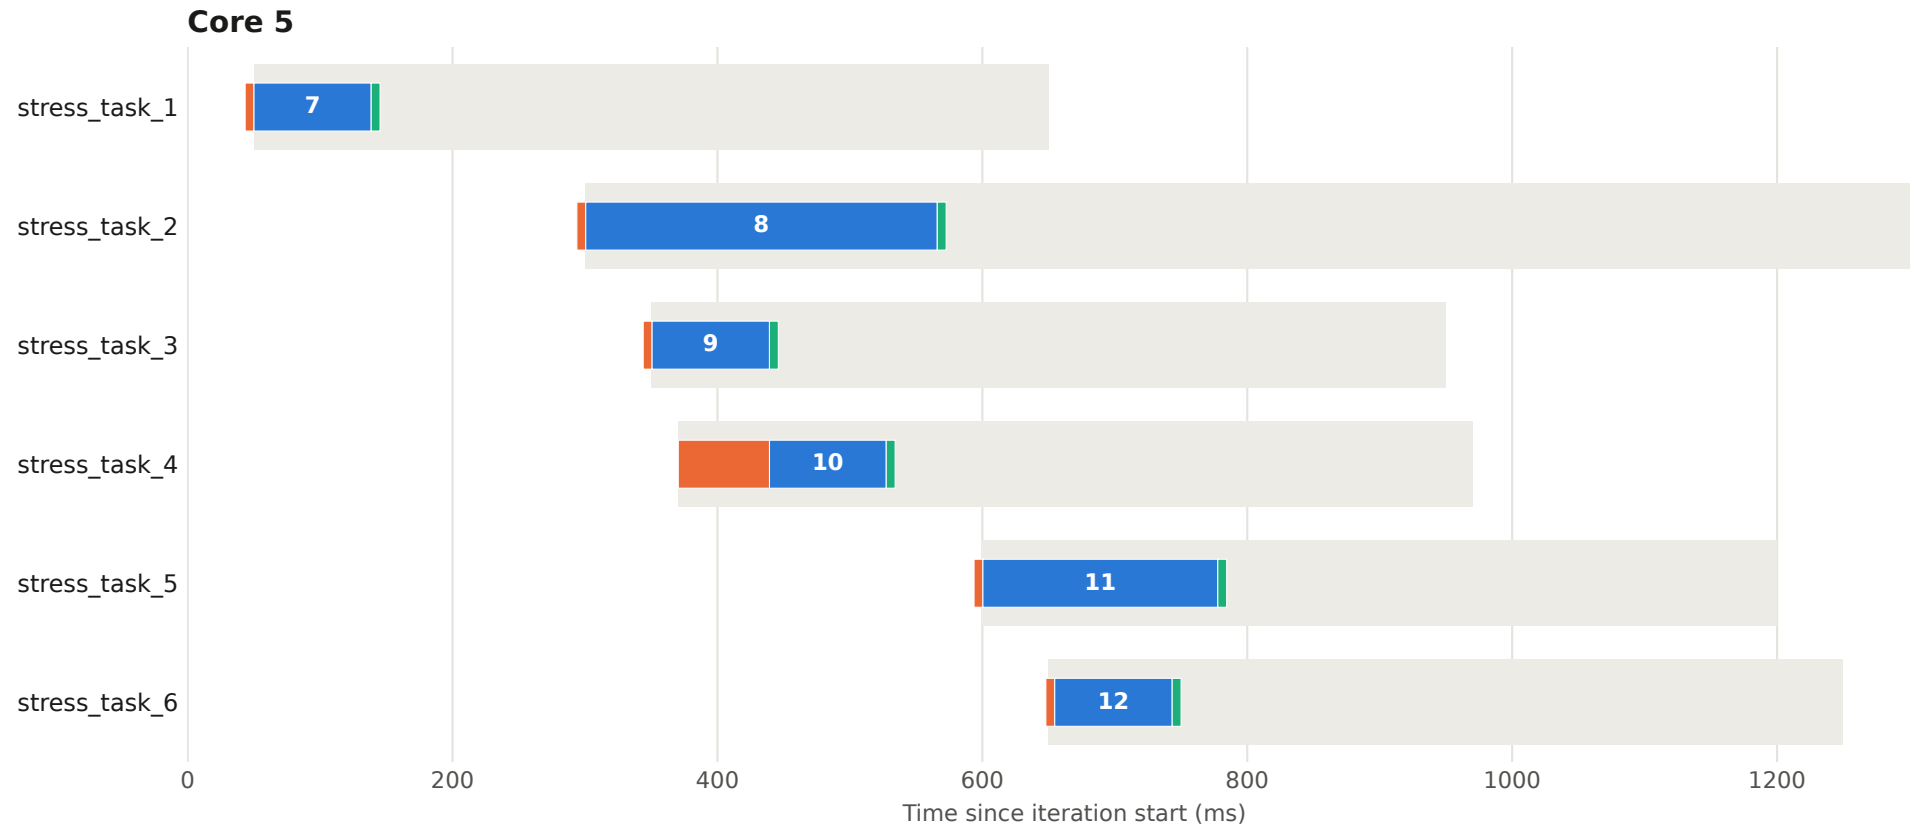


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 99 - core 6

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

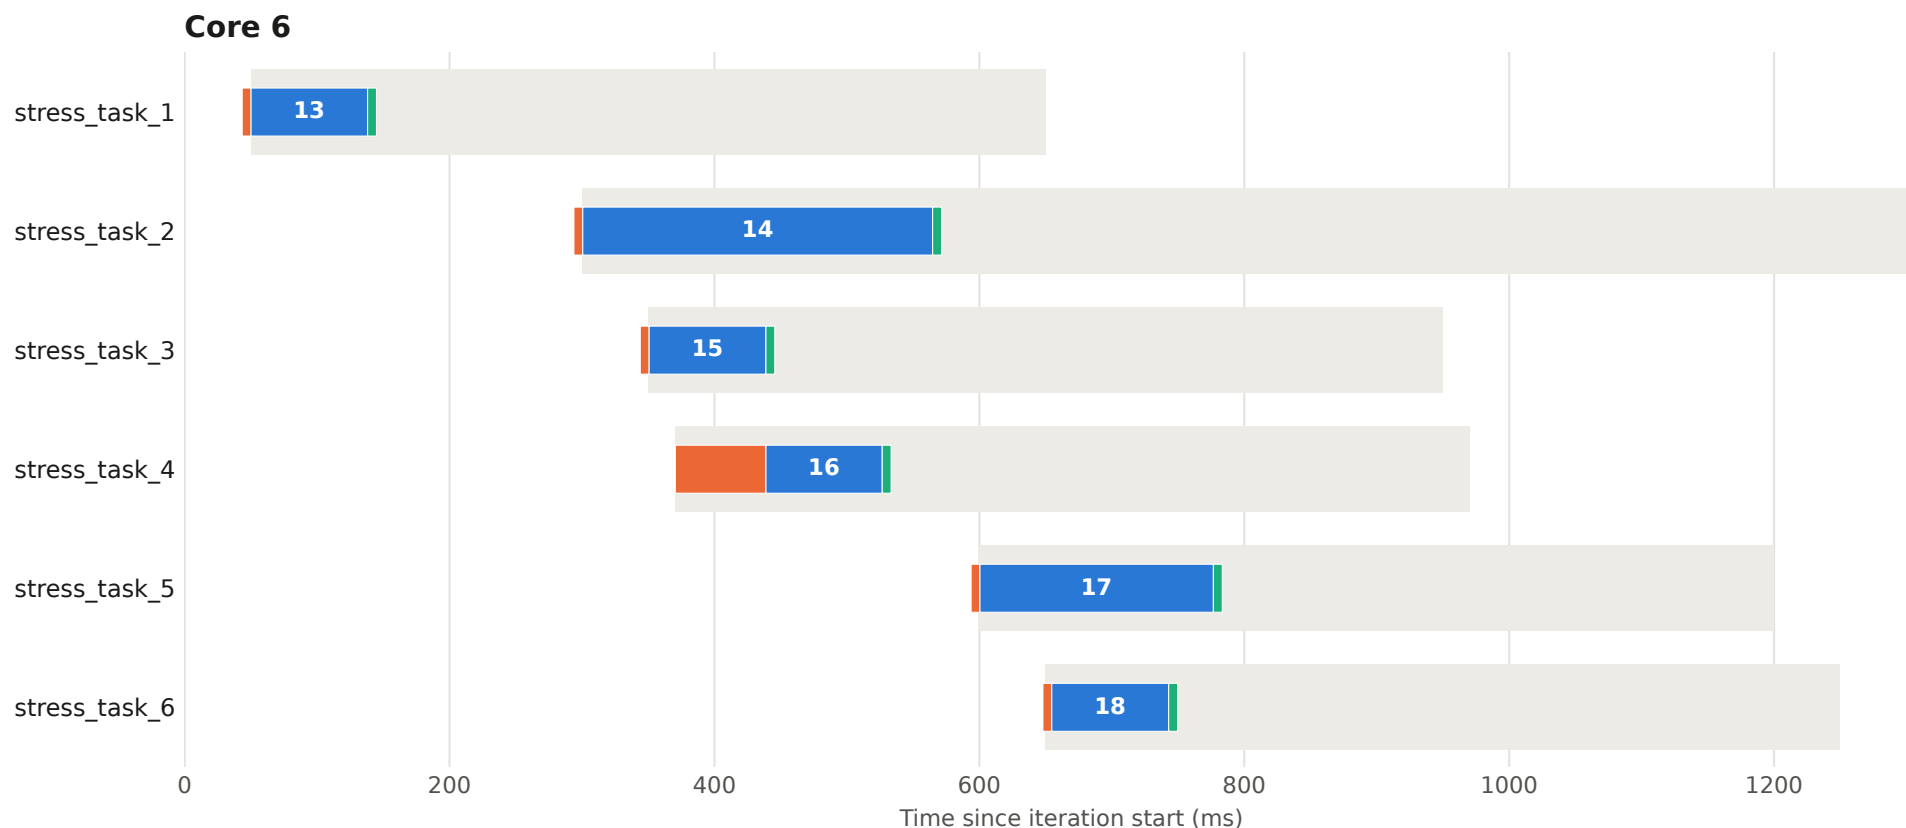


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

# Execution plan - iteration 99 - core 7

One chart per core; each bar is one task call.

- q\_em\_tw\_ms (execution manager -> task wrapper)
- t\_in\_tw\_ms (inside task wrapper; number = task id)
- q\_tw\_em\_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

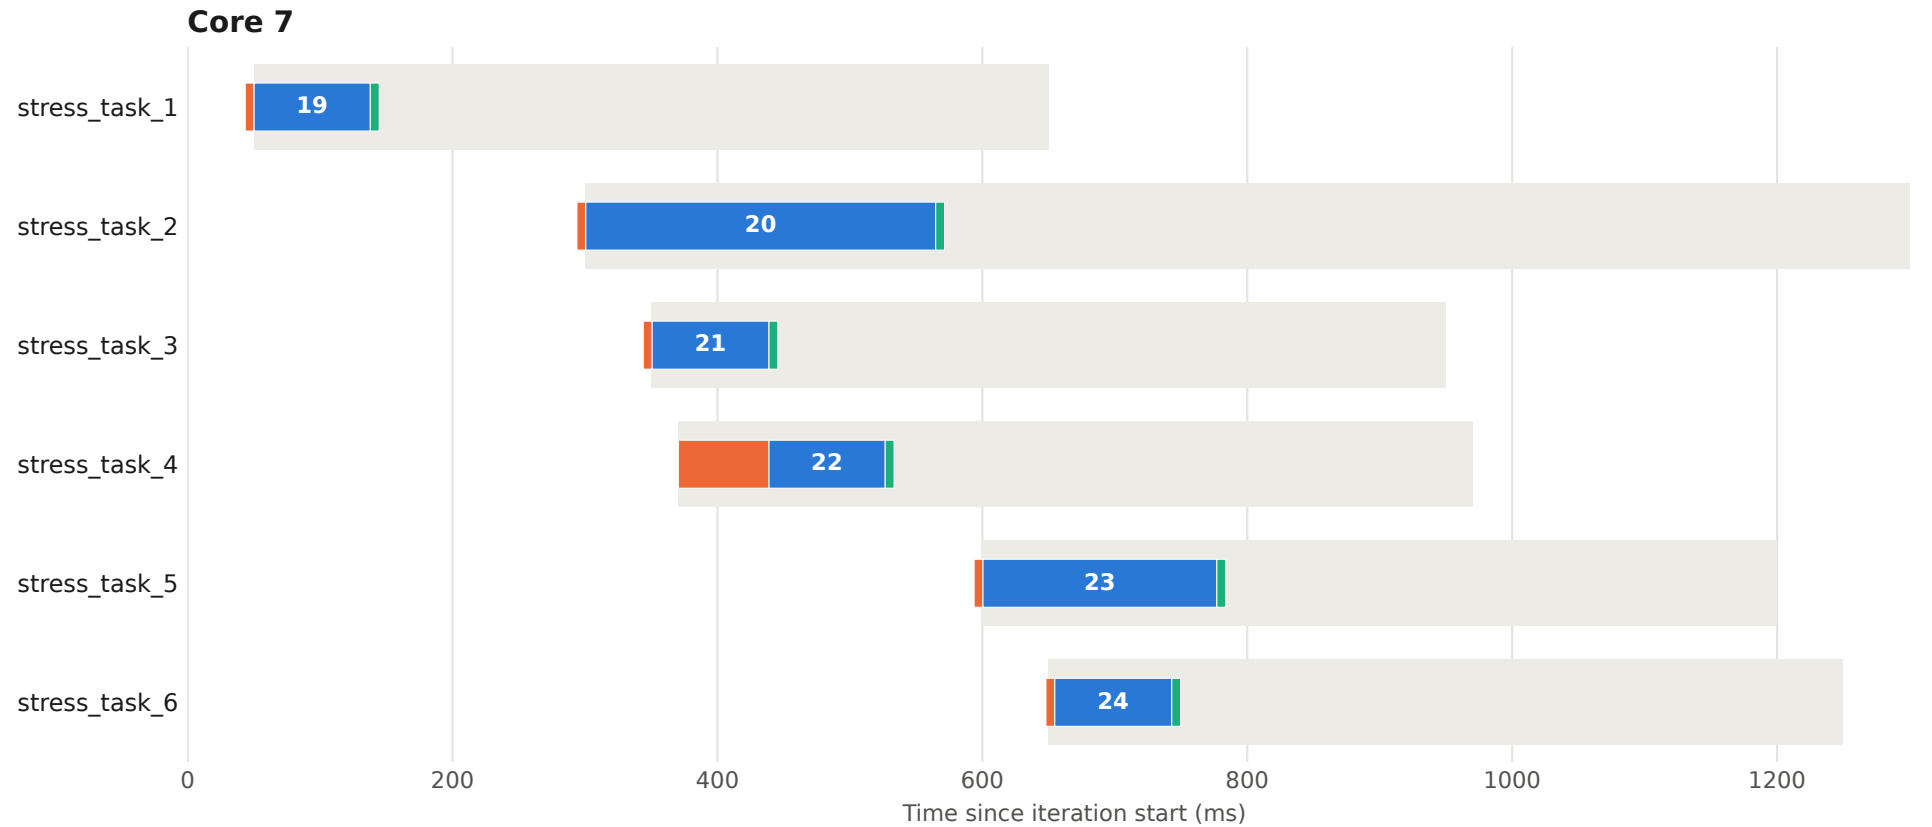

Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.