

Performance report

choreography-mqueue | test_quad_core_sep_1

Generated	2026-09-24 23:44:31
Schedule	Configurable CPU/IO Benchmark
Iterations in logs	100 (#0 - #99), manifest declares 100
Tasks	1=stress_task_1, 2=stress_task_2, 3=stress_task_3, 4=stress_task_4, 5=stress_task_5, 6=stress_task_6, 7=stress_task_1, 8=stress_task_2, 9=stress_task_3, 10=stress_task_4, 11=stress_task_5, 12=stress_task_6, 13=stress_task_1, 14=stress_task_2, 15=stress_task_3, 16=stress_task_4, 17=stress_task_5, 18=stress_task_6
Cores used	5, 6, 7, 62026, 72026
PERF records	1793 (6 malformed skipped)
Log sources	stress_task_1.log, stress_task_2.log, stress_task_3.log, stress_task_4.log, stress_task_5.log, stress_task_6.log
Manifest	tests/test_0_code/manifest.yaml

Statistics summary

All values in milliseconds | samples per task: 98-100 iteration(s) | tasks 1-6

Task ID	Image name	Metric	Mean	Std Dev	Min	Max	Median	p99
1	stress_task_1	q_em_tw_ms	0.072	0.016	0.051	0.192	0.071	0.094
		t_in_tw_ms	88.077	0.736	86.849	92.616	88.322	89.561
		q_tw_em_ms	0.005	0.002	0.003	0.017	0.004	0.016
		total_ms	88.153	0.736	86.927	92.691	88.390	89.756
2	stress_task_2	q_em_tw_ms	0.071	0.015	0.052	0.193	0.069	0.120
		t_in_tw_ms	264.924	0.696	263.179	270.062	264.892	266.869
		q_tw_em_ms	0.005	0.003	0.004	0.017	0.004	0.016
		total_ms	265.000	0.700	263.241	270.136	264.964	267.065
3	stress_task_3	q_em_tw_ms	0.061	0.014	0.046	0.176	0.059	0.088
		t_in_tw_ms	88.324	0.500	87.555	92.699	88.324	89.572
		q_tw_em_ms	0.005	0.002	0.003	0.022	0.004	0.016
		total_ms	88.390	0.502	87.625	92.765	88.393	89.751
4	stress_task_4	q_em_tw_ms	68.419	0.645	66.905	73.005	68.285	69.712
		t_in_tw_ms	88.304	0.262	86.991	88.679	88.424	88.548
		q_tw_em_ms	0.004	0.001	0.003	0.005	0.004	0.005
		total_ms	156.727	0.599	155.444	159.999	156.645	158.378
5	stress_task_5	q_em_tw_ms	0.076	0.016	0.050	0.206	0.075	0.111
		t_in_tw_ms	98.136	27.825	87.081	177.089	88.462	177.062
		q_tw_em_ms	0.006	0.003	0.004	0.020	0.005	0.018
		total_ms	98.218	27.823	87.172	177.151	88.541	177.133
6	stress_task_6	q_em_tw_ms	9.712	16.794	0.050	39.514	0.067	39.265
		t_in_tw_ms	113.004	18.575	87.914	135.867	126.225	129.561
		q_tw_em_ms	0.004	0.002	0.003	0.019	0.004	0.013
		total_ms	122.720	12.132	88.463	135.943	126.826	129.741

Statistics summary

All values in milliseconds | samples per task: 98-100 iteration(s) | tasks 7-12

Task ID	Image name	Metric	Mean	Std Dev	Min	Max	Median	p99
7	stress_task_1	q_em_tw_ms	0.038	0.029	0.023	0.323	0.033	0.055
		t_in_tw_ms	87.780	0.552	86.608	88.908	88.048	88.309
		q_tw_em_ms	0.007	0.004	0.004	0.025	0.006	0.020
		total_ms	87.825	0.557	86.644	89.236	88.092	88.364
8	stress_task_2	q_em_tw_ms	0.034	0.012	0.027	0.141	0.031	0.052
		t_in_tw_ms	264.297	0.514	262.361	266.418	264.298	265.134
		q_tw_em_ms	0.006	0.004	0.004	0.031	0.005	0.018
		total_ms	264.337	0.518	262.405	266.563	264.335	265.172
9	stress_task_3	q_em_tw_ms	0.031	0.010	0.028	0.133	0.030	0.042
		t_in_tw_ms	88.059	0.270	86.899	88.867	88.184	88.344
		q_tw_em_ms	0.006	0.004	0.003	0.038	0.005	0.020
		total_ms	88.096	0.274	86.936	89.019	88.219	88.378
10	stress_task_4	q_em_tw_ms	68.154	0.387	67.380	69.033	68.122	68.986
		t_in_tw_ms	88.151	0.273	86.812	88.769	88.259	88.398
		q_tw_em_ms	0.006	0.006	0.003	0.050	0.004	0.029
		total_ms	156.312	0.509	154.989	157.807	156.325	157.357
11	stress_task_5	q_em_tw_ms	0.033	0.012	0.024	0.146	0.031	0.048
		t_in_tw_ms	166.583	27.705	87.390	176.803	176.236	176.700
		q_tw_em_ms	0.006	0.005	0.003	0.038	0.004	0.025
		total_ms	166.621	27.702	87.425	176.854	176.272	176.739
12	stress_task_6	q_em_tw_ms	0.418	3.866	0.027	38.692	0.030	0.526
		t_in_tw_ms	92.347	12.098	87.715	127.802	88.272	127.374
		q_tw_em_ms	0.005	0.003	0.003	0.018	0.005	0.016
		total_ms	92.771	12.580	87.747	127.949	88.307	127.414

Statistics summary


All values in milliseconds | samples per task: 98-100 iteration(s) | tasks 13-18

Task ID	Image name	Metric	Mean	Std Dev	Min	Max	Median	p99
13	stress_task_1	q_em_tw_ms	0.030	0.016	0.025	0.182	0.027	0.048
		t_in_tw_ms	87.894	0.424	86.600	88.277	88.065	88.197
		q_tw_em_ms	0.006	0.004	0.003	0.028	0.004	0.020
		total_ms	87.930	0.422	86.644	88.309	88.098	88.231
14	stress_task_2	q_em_tw_ms	0.030	0.020	0.023	0.228	0.027	0.040
		t_in_tw_ms	264.308	0.420	262.248	264.950	264.314	264.929
		q_tw_em_ms	0.006	0.005	0.004	0.040	0.005	0.027
		total_ms	264.343	0.424	262.279	265.184	264.355	264.966
15	stress_task_3	q_em_tw_ms	0.029	0.017	0.025	0.195	0.027	0.039
		t_in_tw_ms	88.087	0.252	87.629	89.200	88.187	88.337
		q_tw_em_ms	0.005	0.003	0.003	0.031	0.004	0.014
		total_ms	88.120	0.260	87.661	89.401	88.218	88.369
16	stress_task_4	q_em_tw_ms	68.164	0.476	67.191	69.344	68.102	69.011
		t_in_tw_ms	88.148	0.288	86.779	88.402	88.265	88.378
		q_tw_em_ms	0.005	0.003	0.003	0.019	0.004	0.016
		total_ms	156.317	0.580	154.602	157.750	156.335	157.373
17	stress_task_5	q_em_tw_ms	0.030	0.024	0.025	0.271	0.027	0.043
		t_in_tw_ms	163.055	31.605	87.980	176.779	176.237	176.674
		q_tw_em_ms	0.006	0.004	0.004	0.022	0.004	0.019
		total_ms	163.091	31.599	88.010	176.812	176.267	176.713
18	stress_task_6	q_em_tw_ms	0.029	0.012	0.025	0.146	0.027	0.042
		t_in_tw_ms	95.465	15.189	87.728	129.013	88.279	127.368
		q_tw_em_ms	0.004	0.001	0.003	0.016	0.004	0.006
		total_ms	95.498	15.192	87.759	129.165	88.309	127.400

Execution plan - iteration 0 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

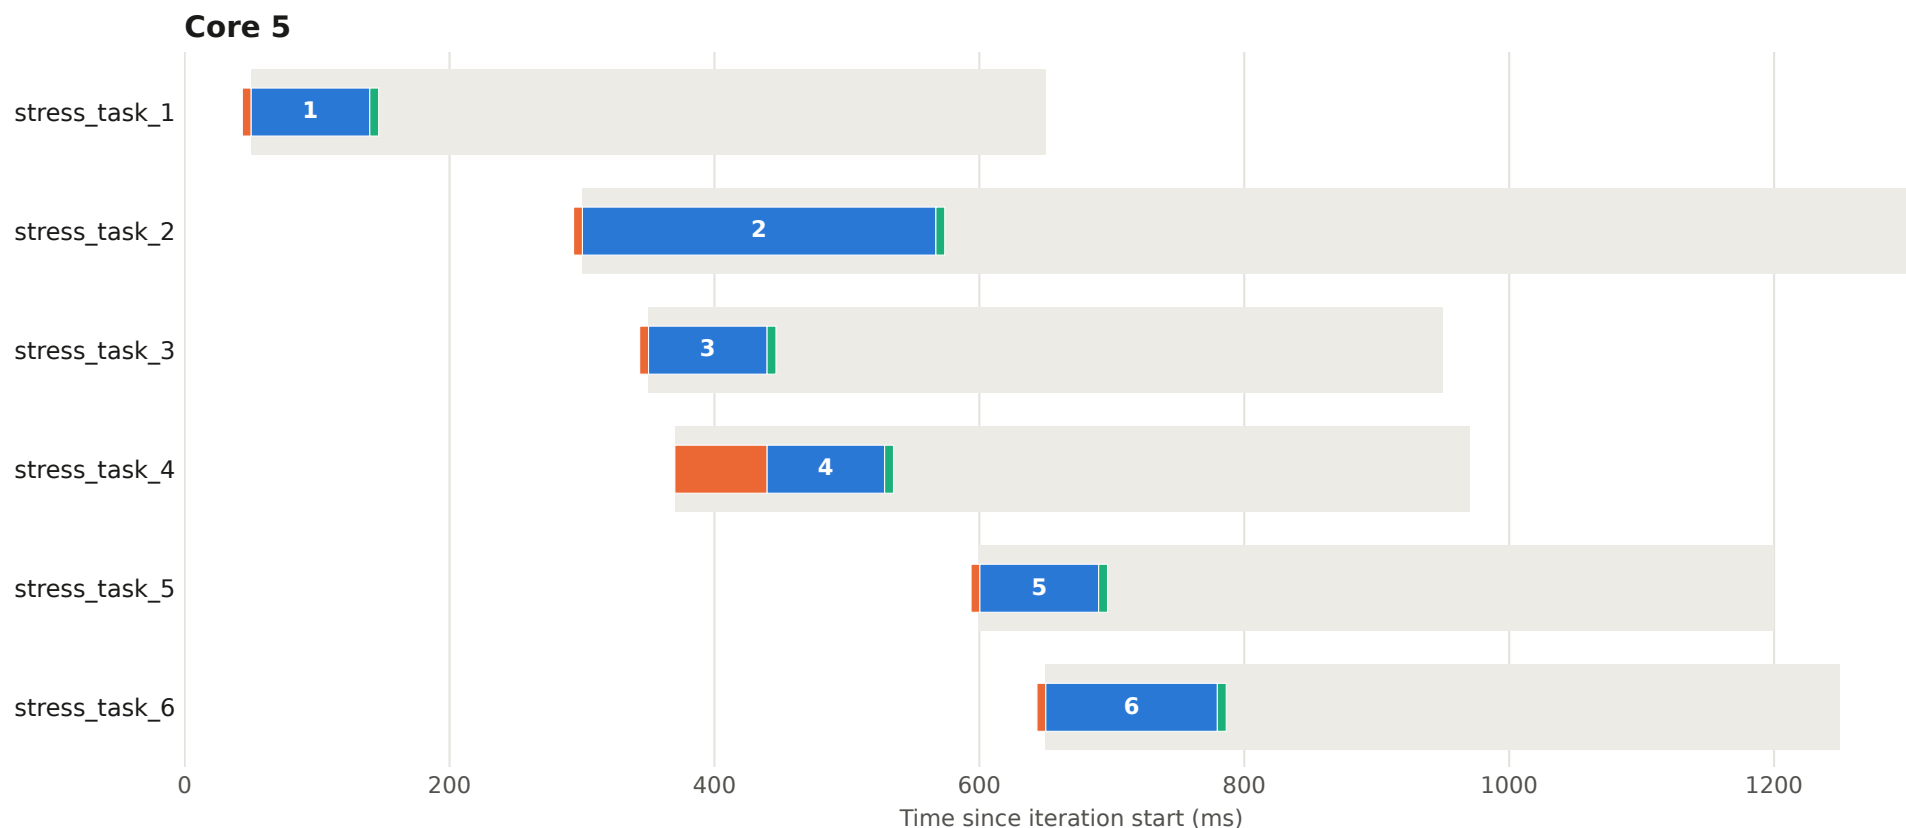


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 0 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

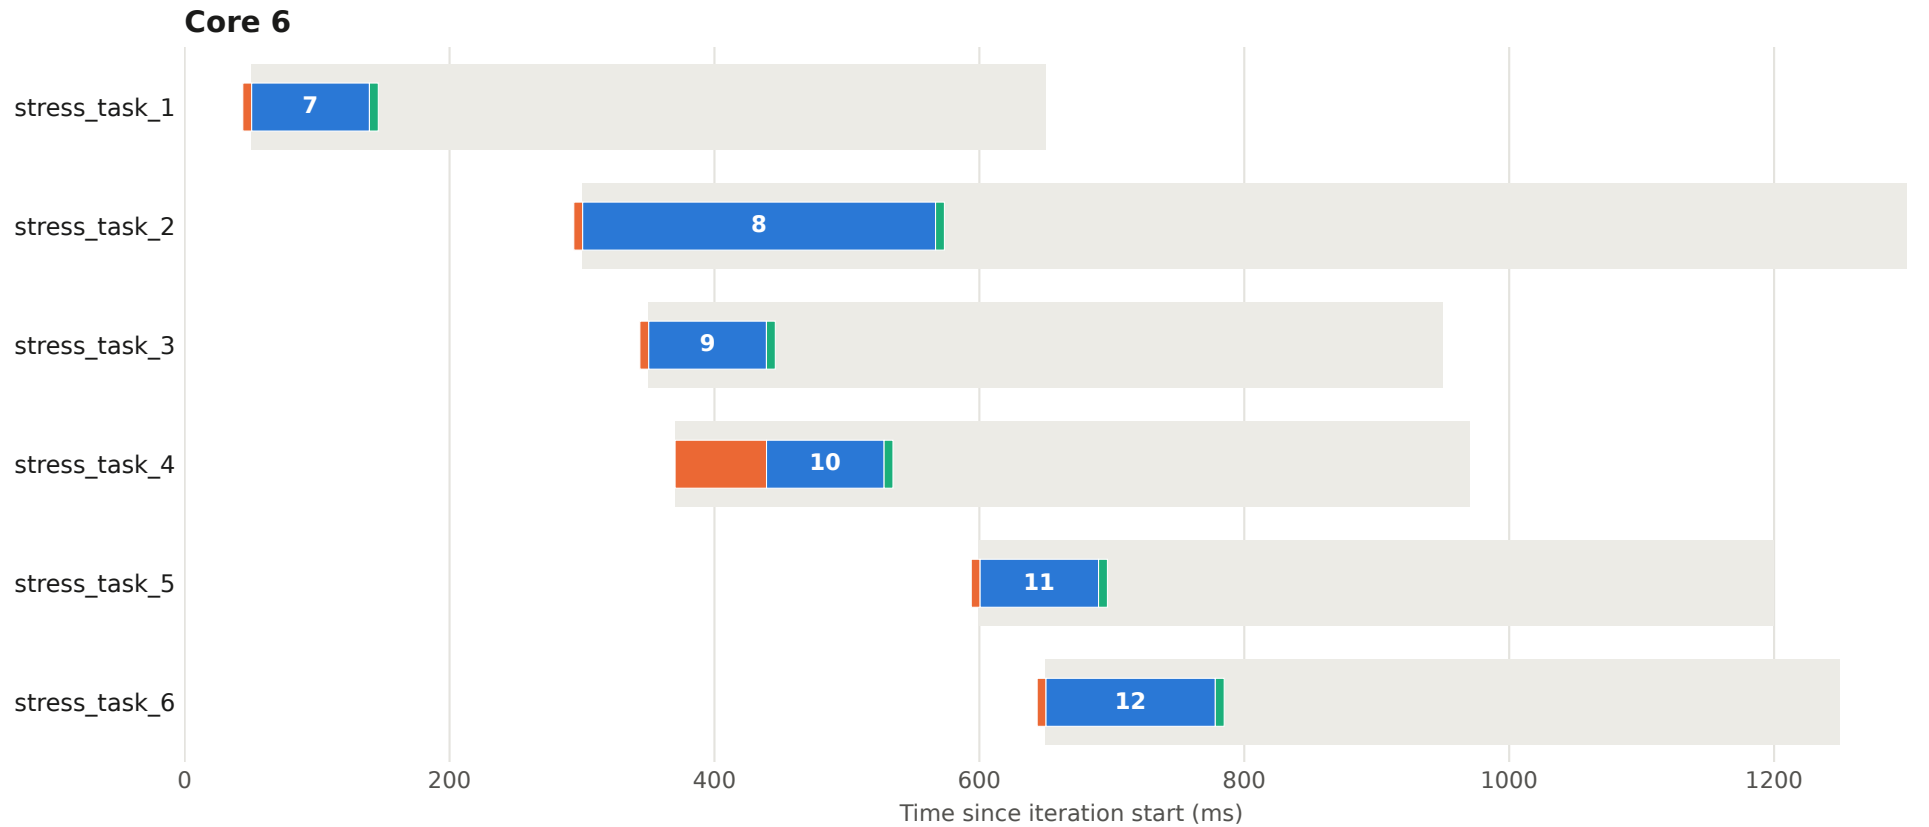


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 0 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

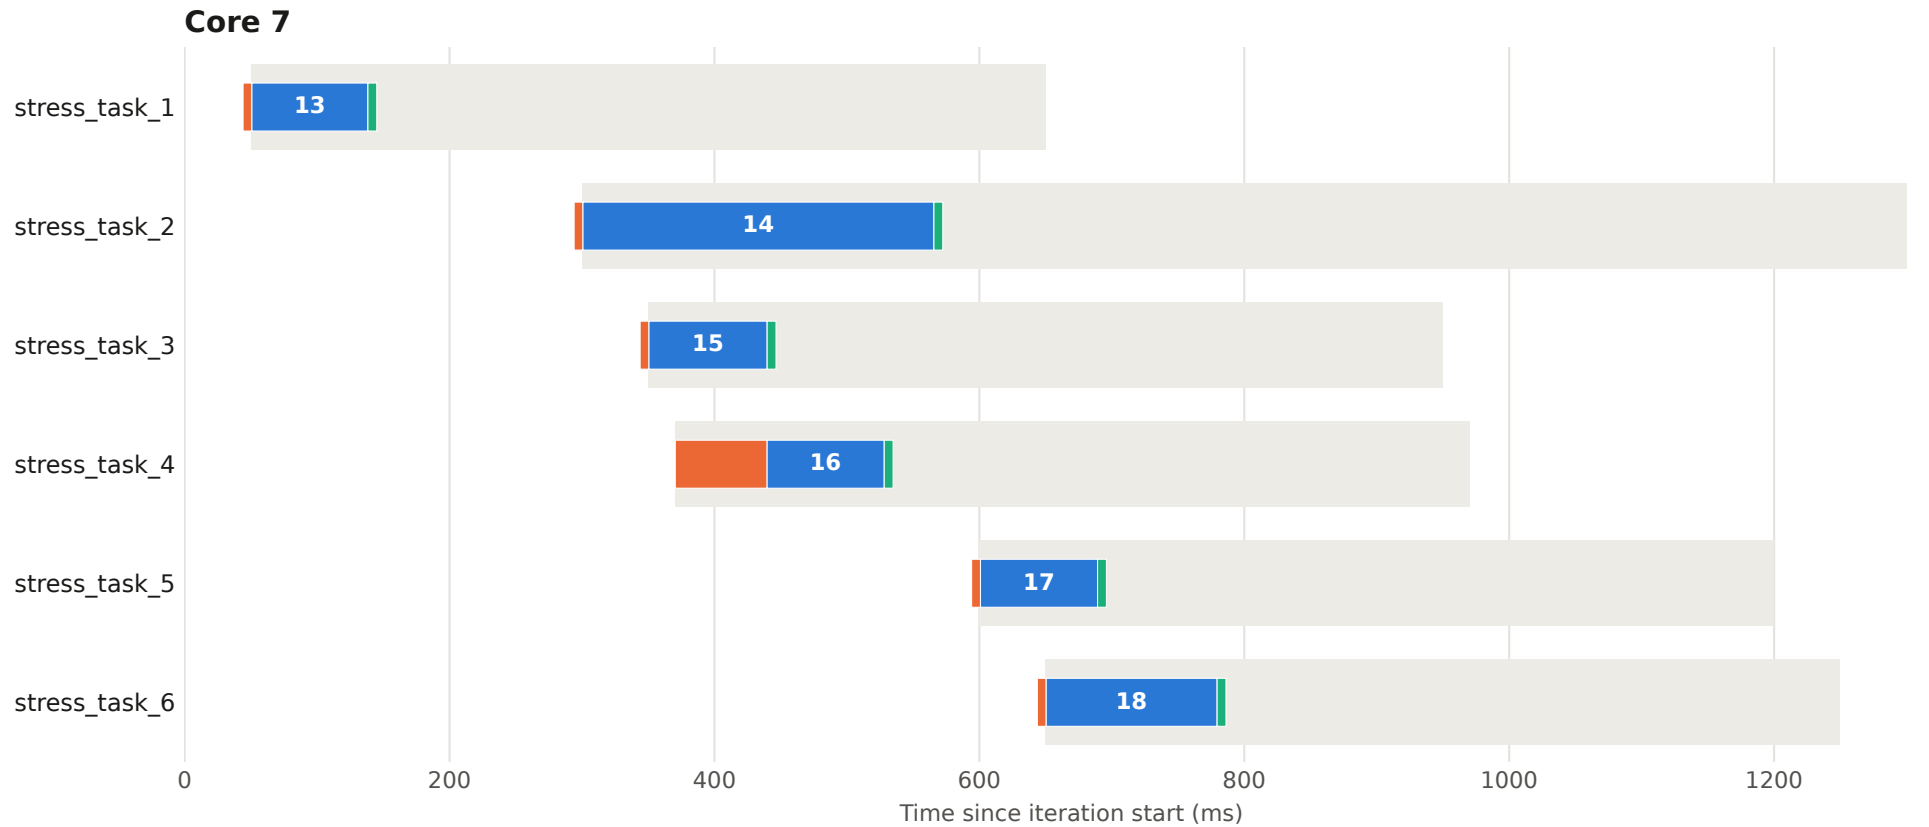


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 1 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

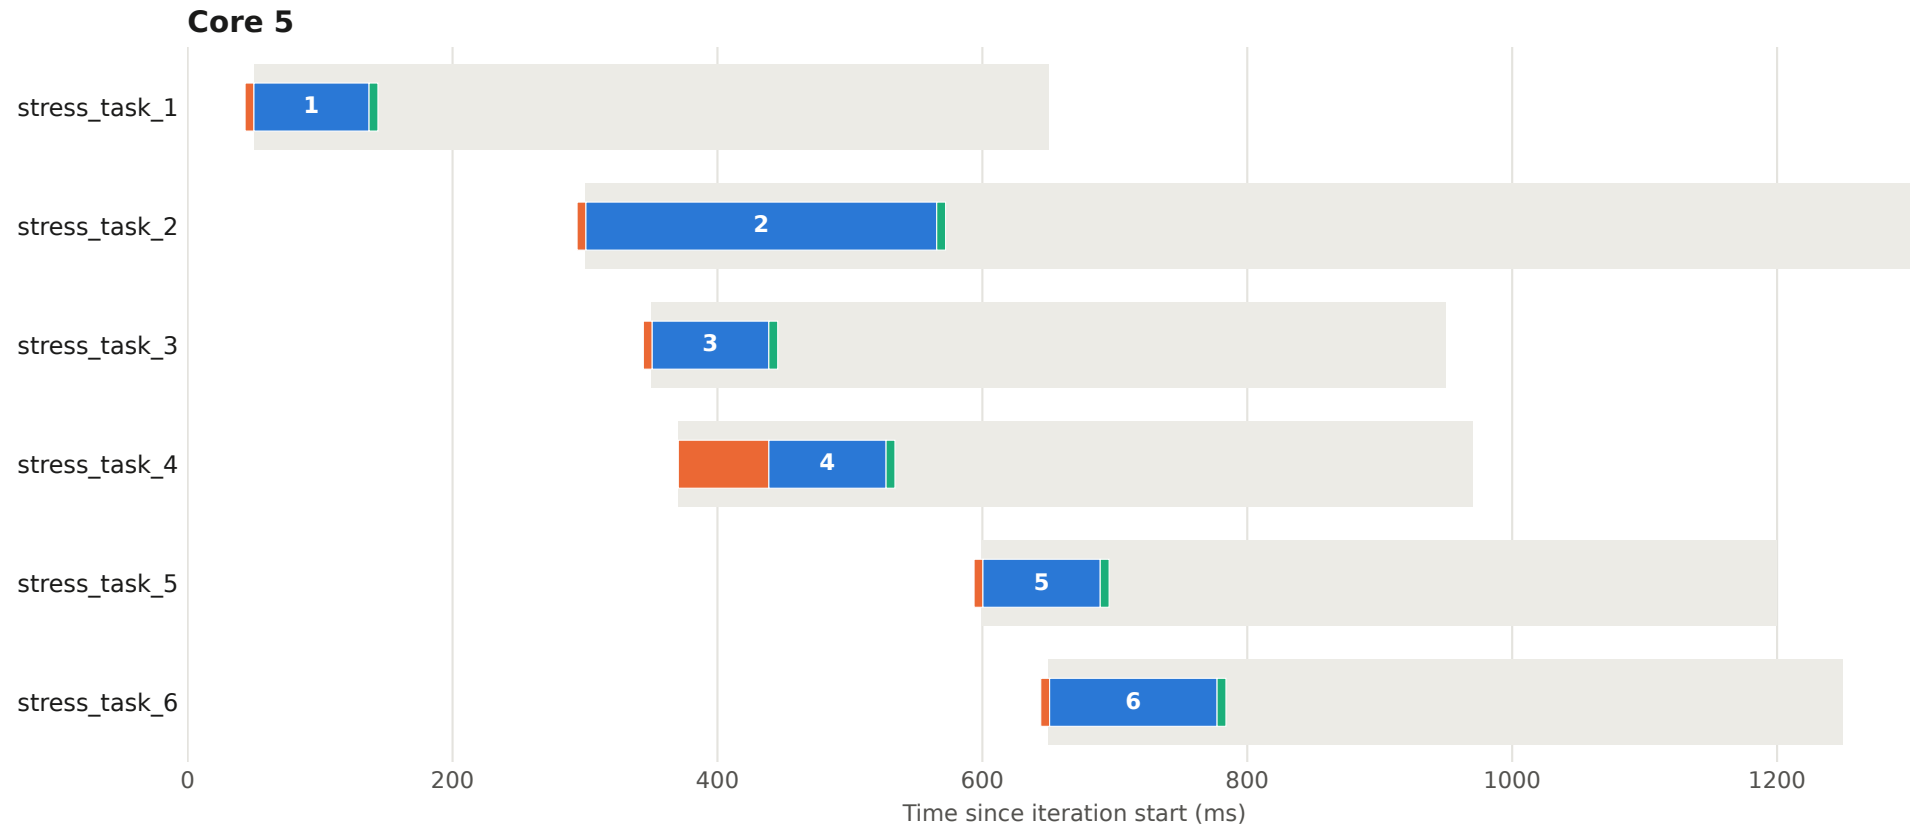


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 1 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

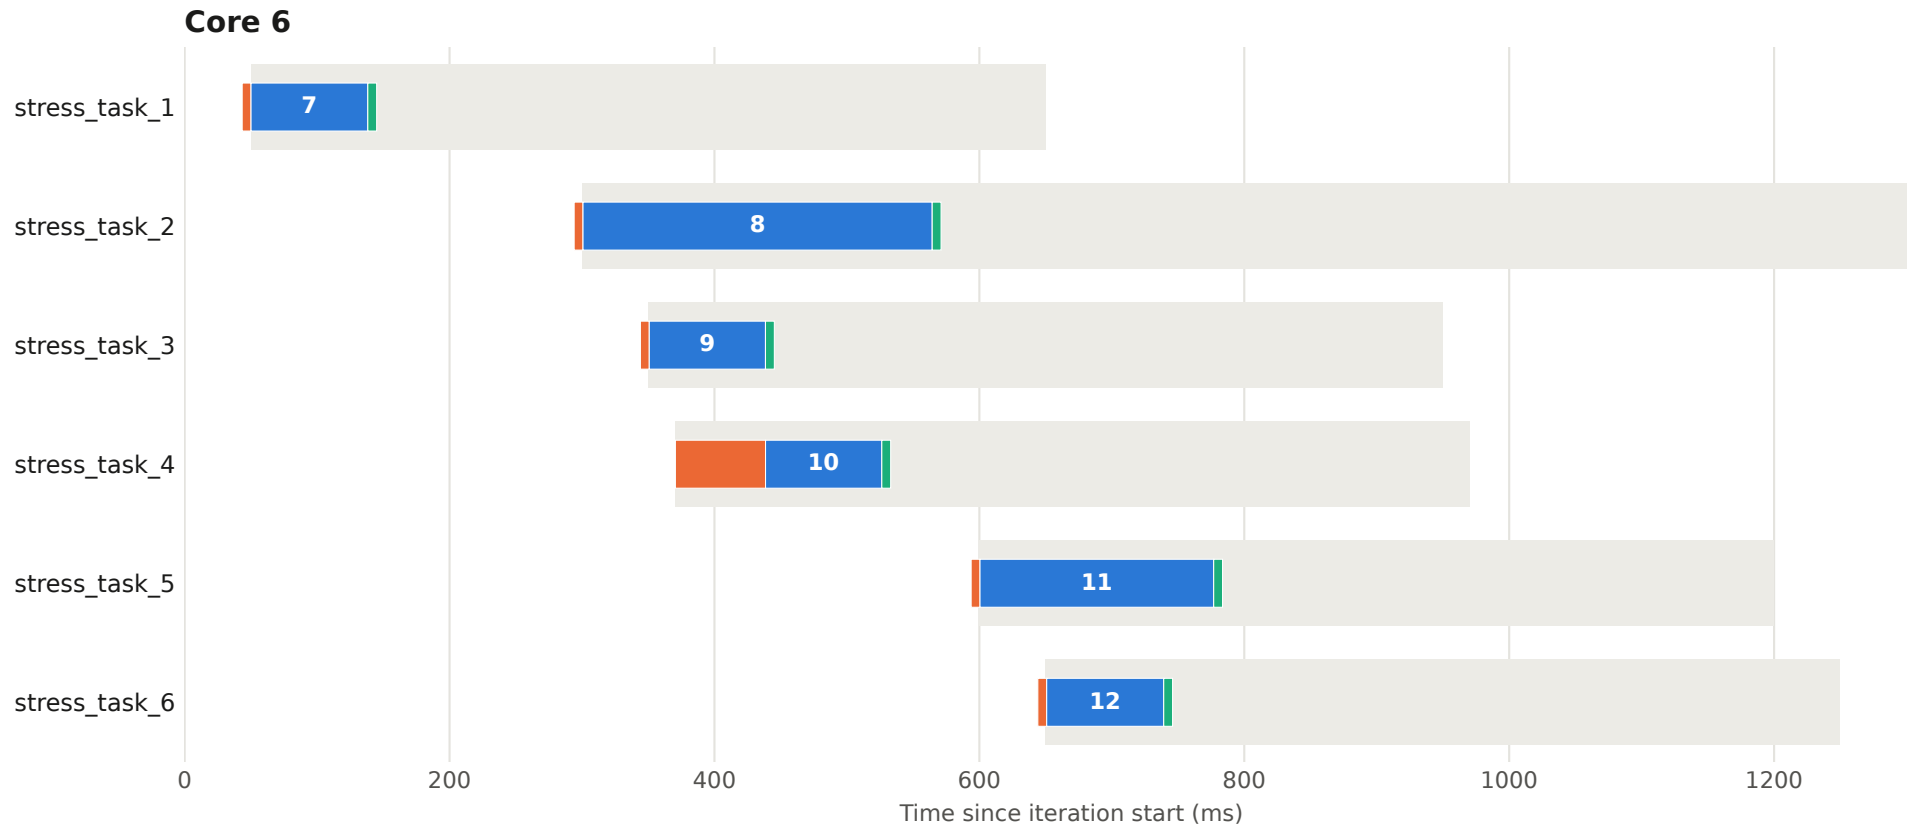


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 1 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

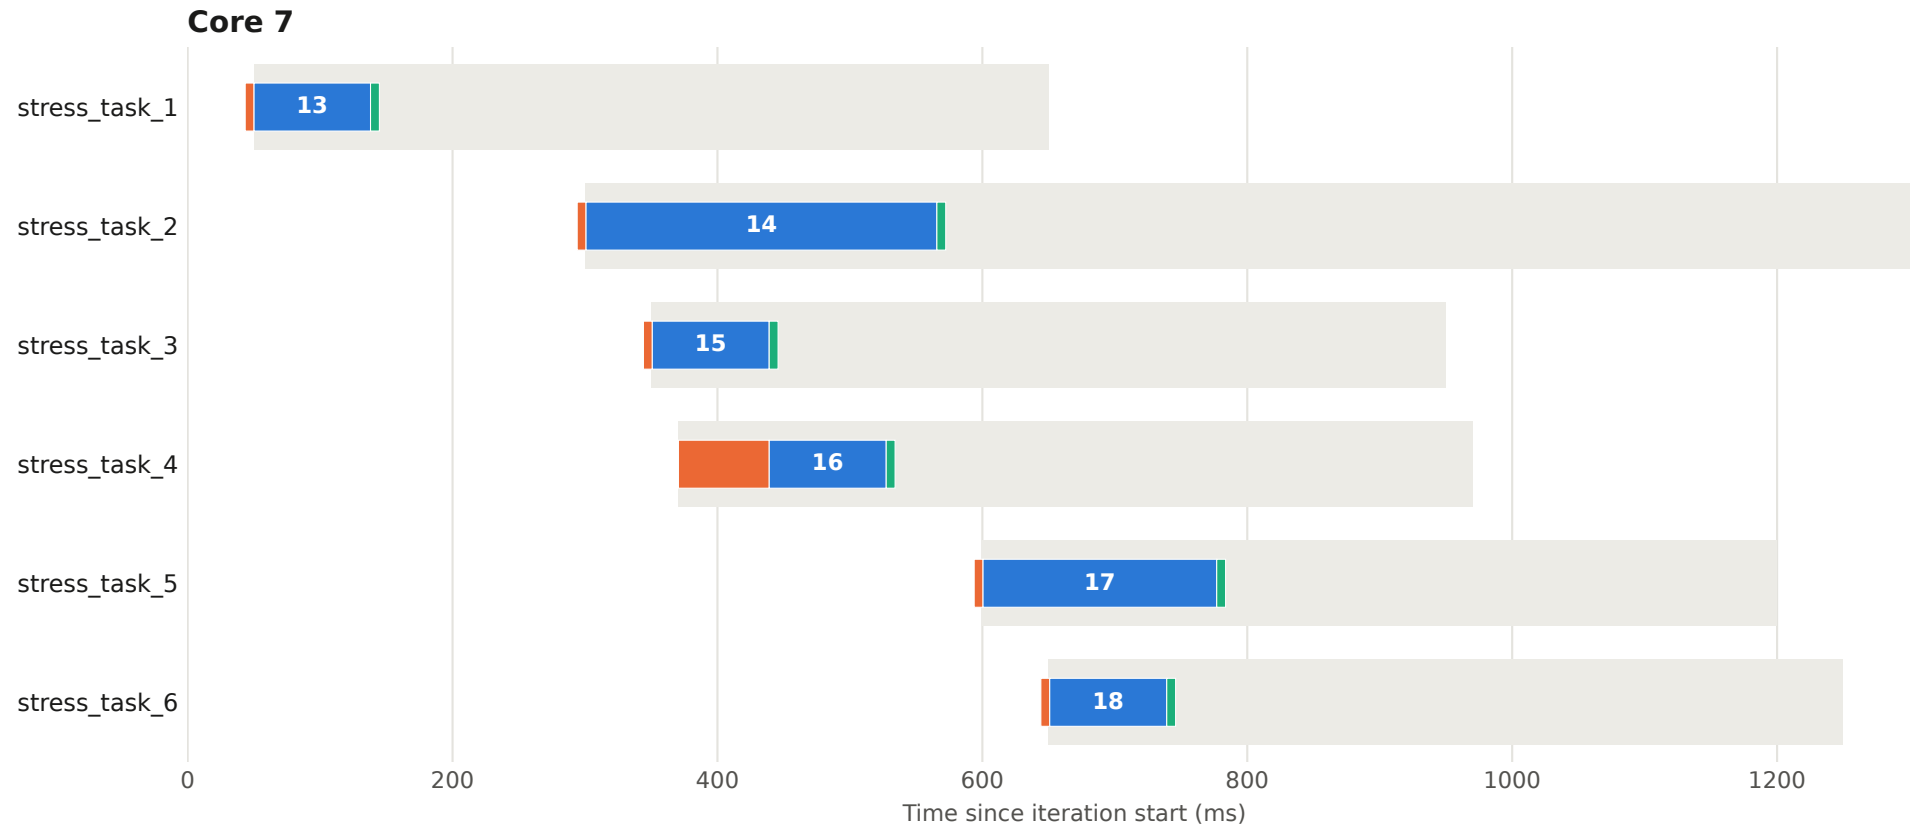


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 2 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

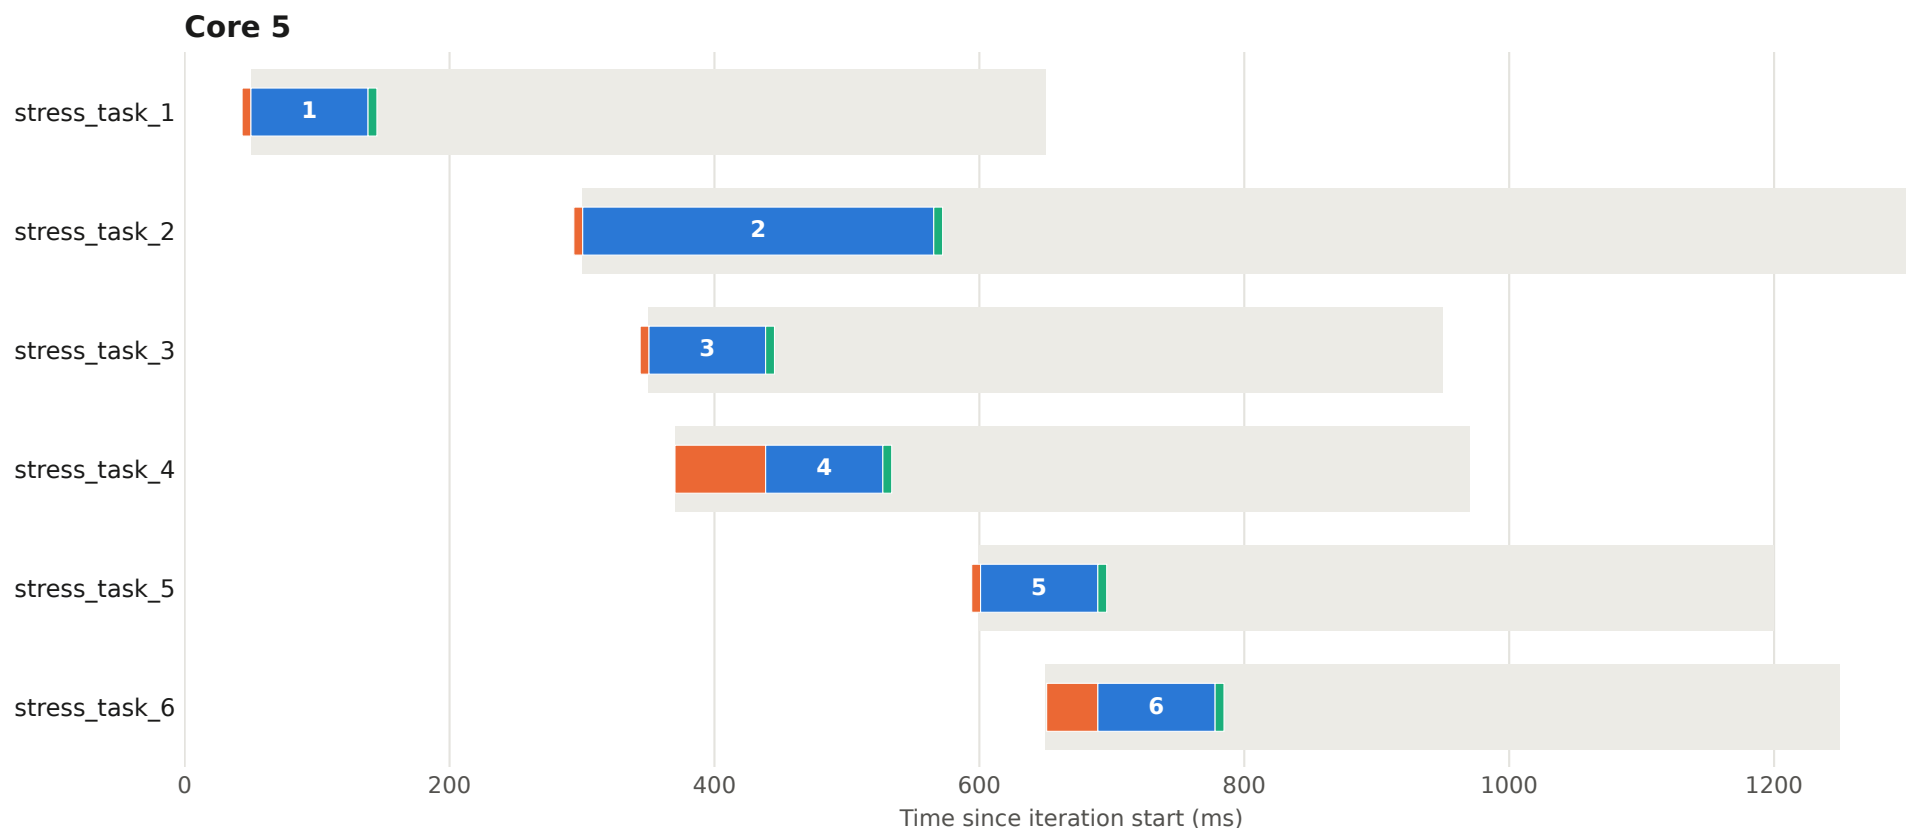


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 2 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

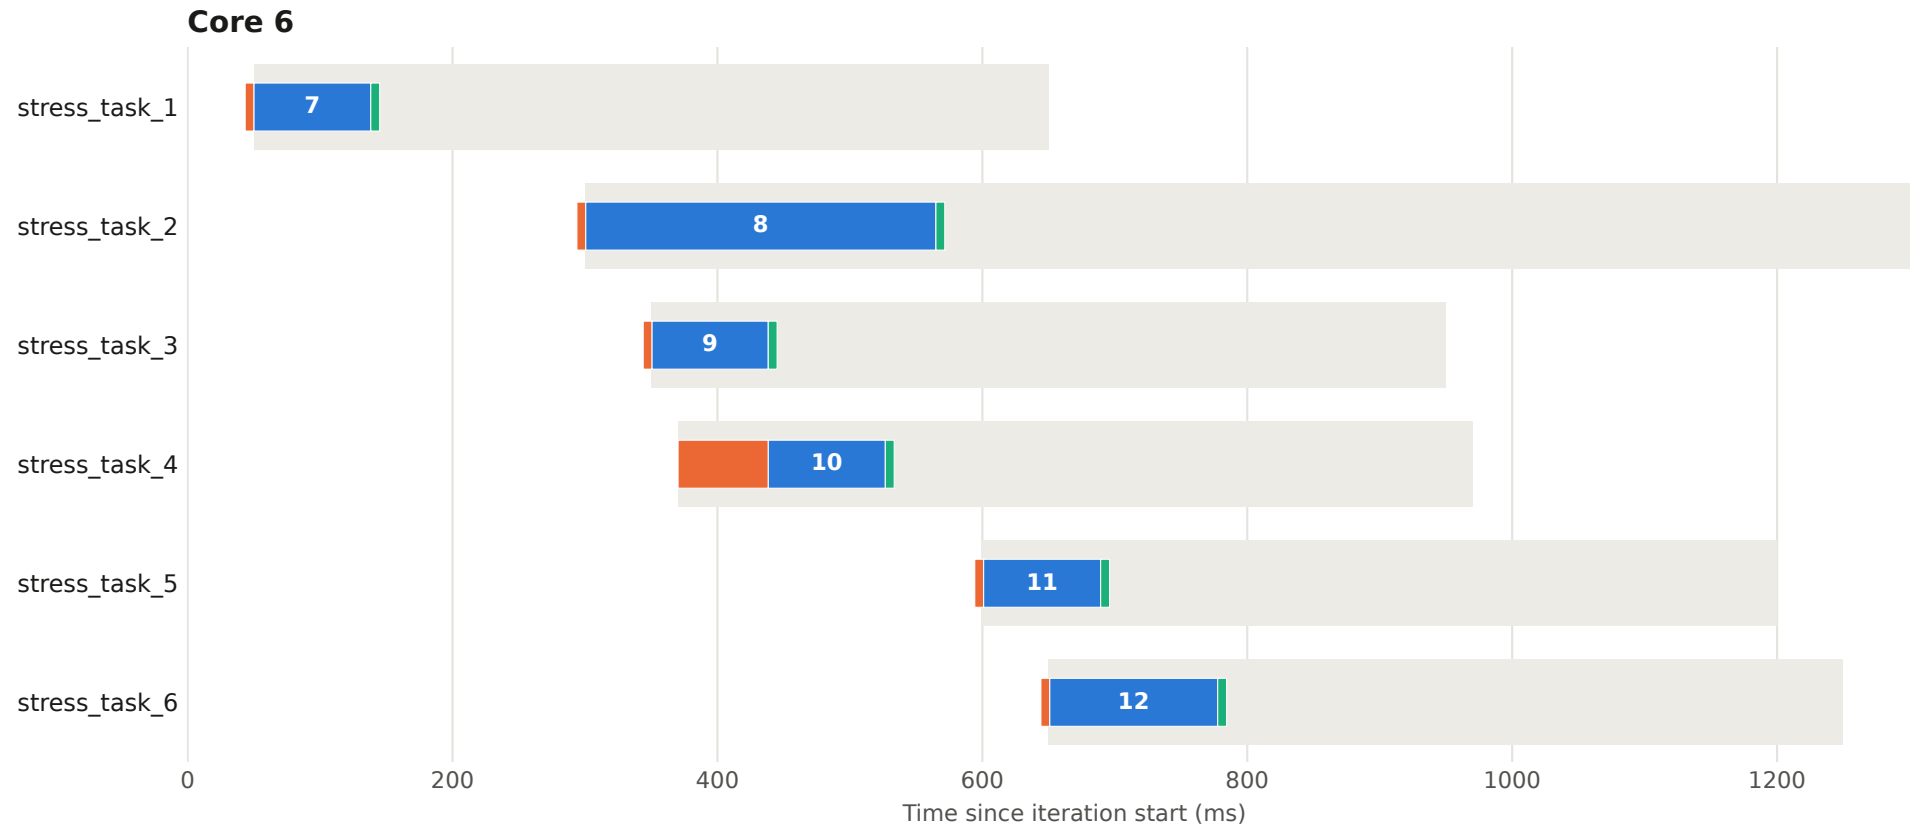


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 2 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

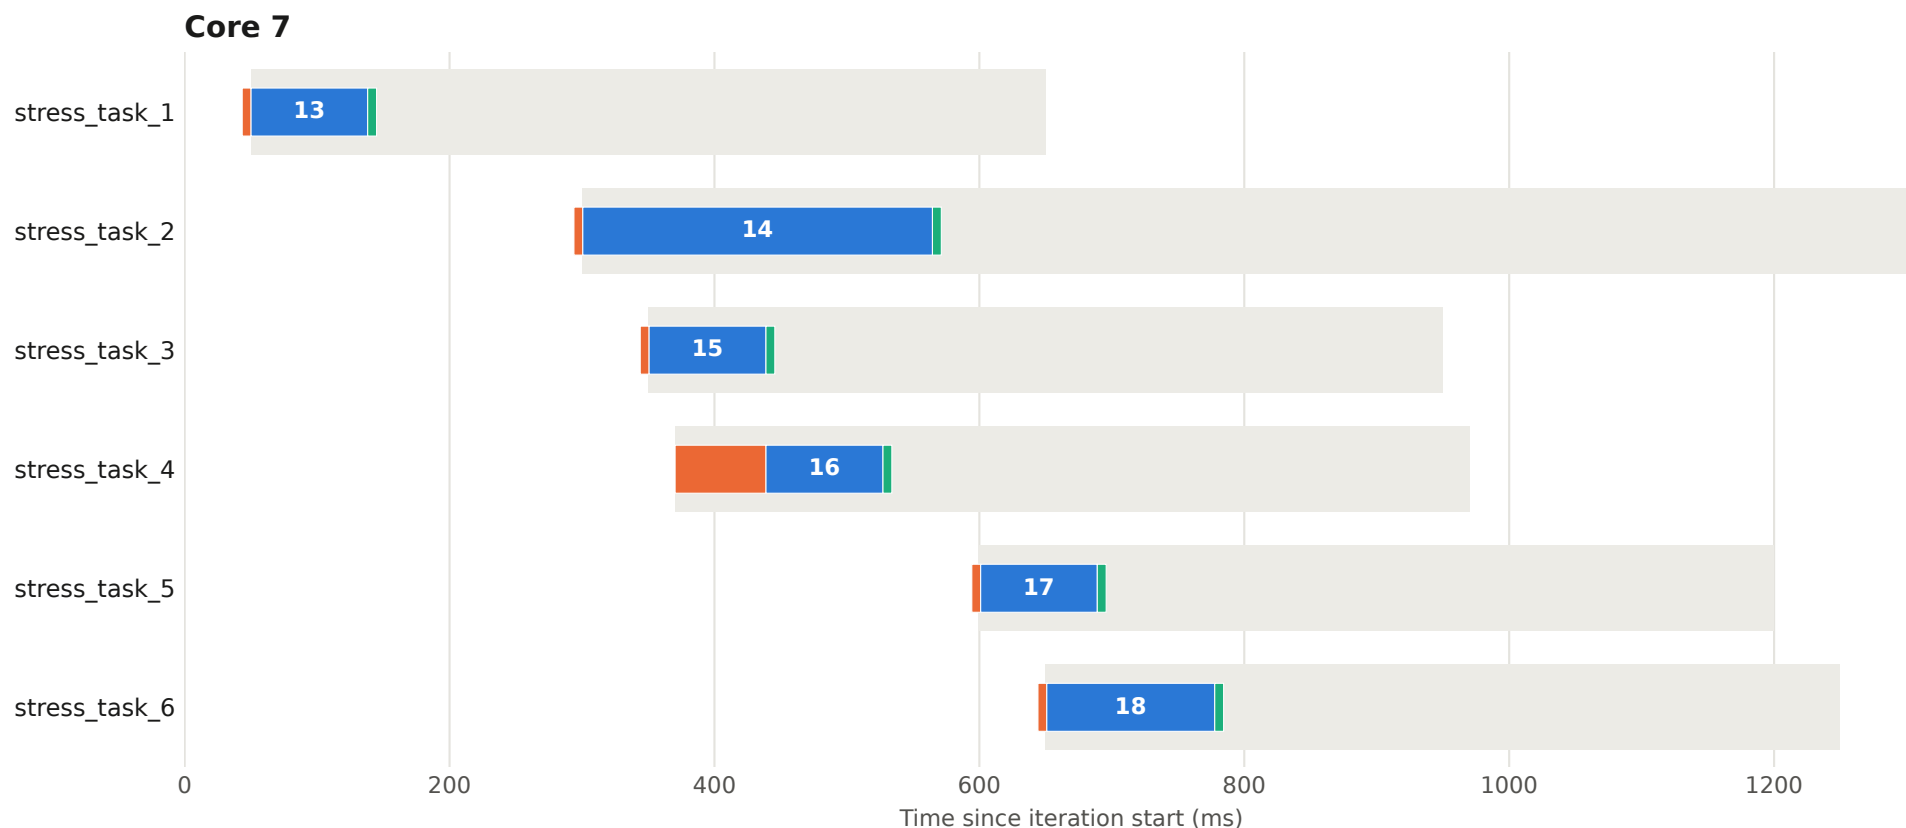


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 3 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

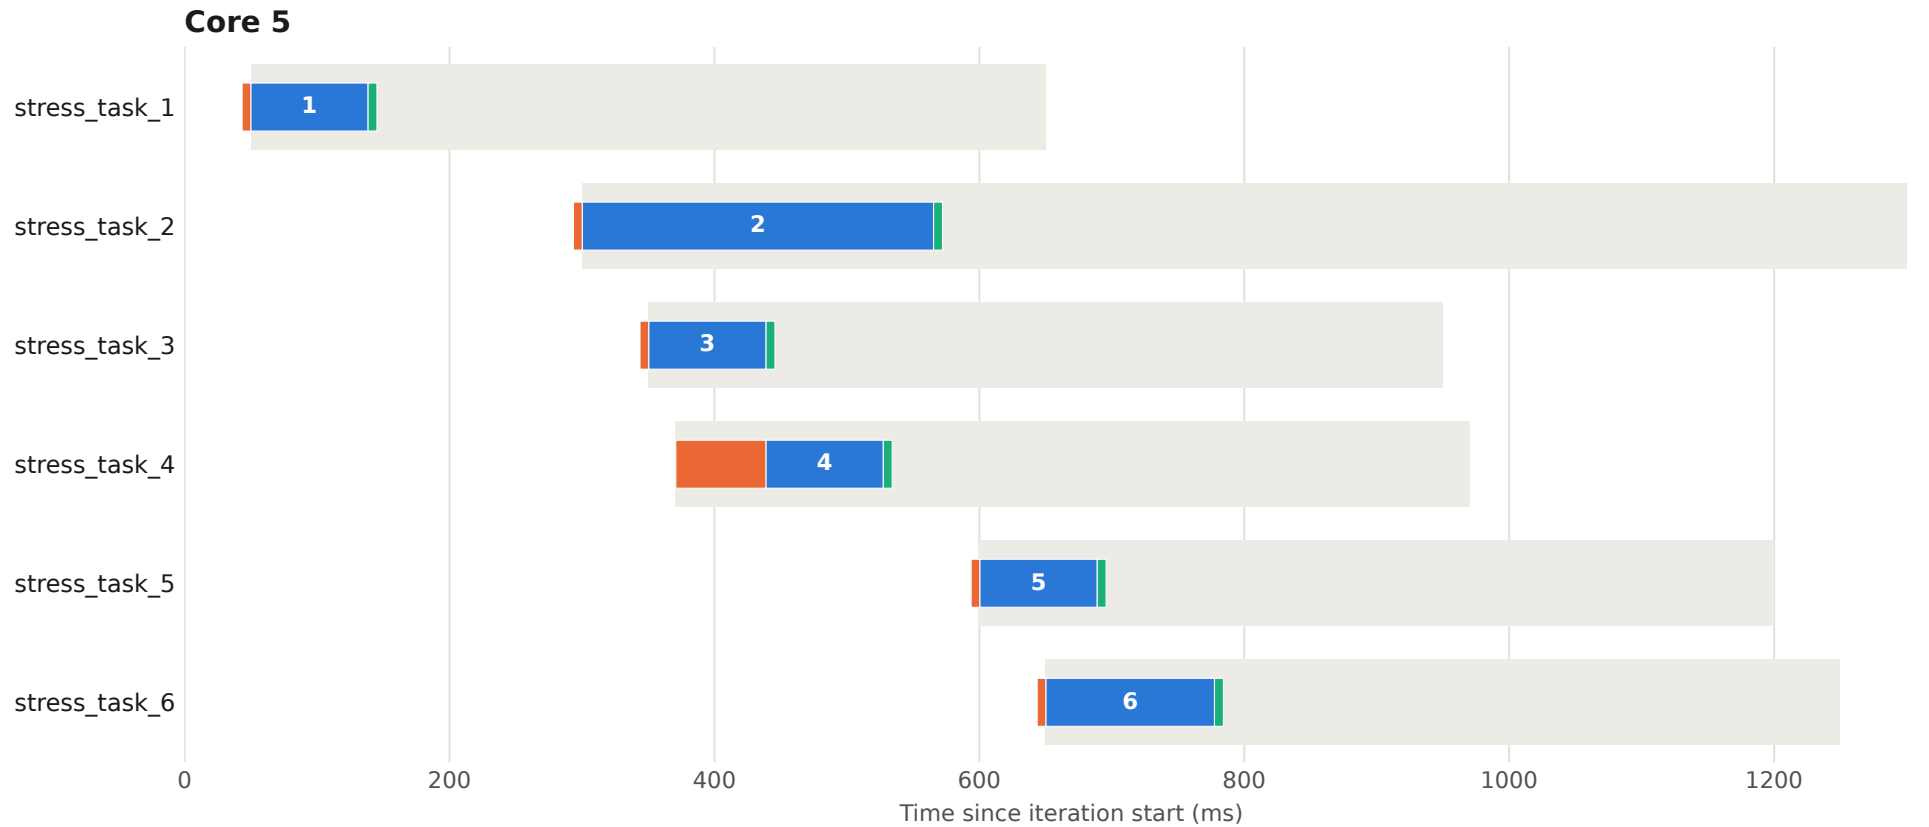


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 3 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

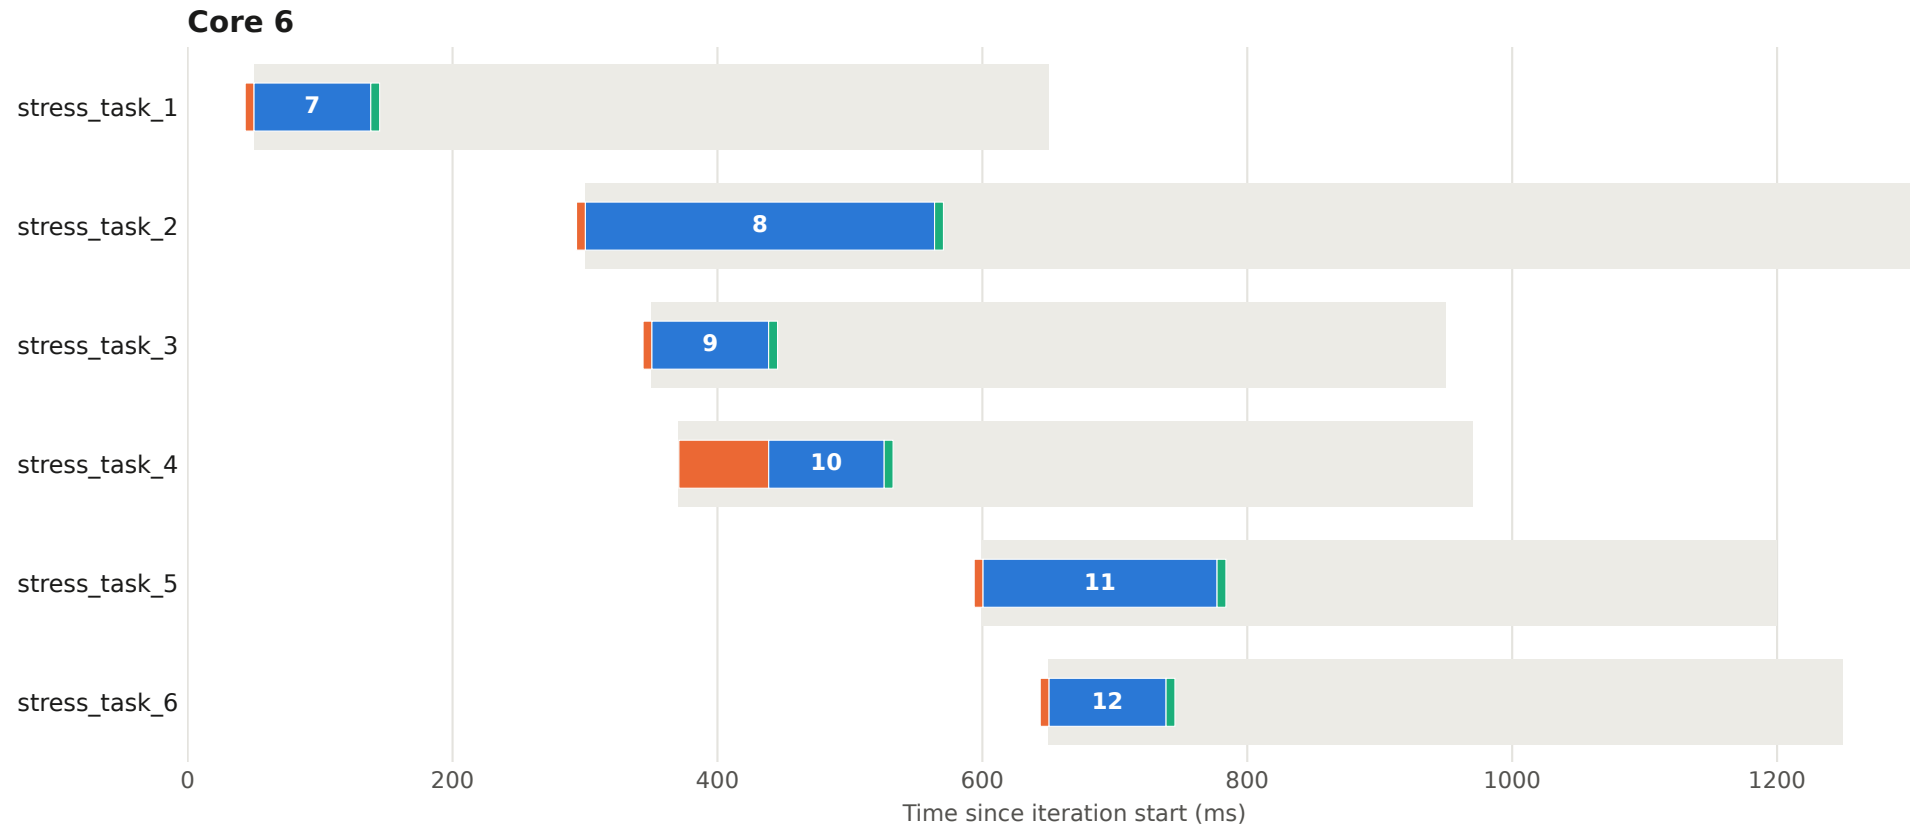


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 3 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

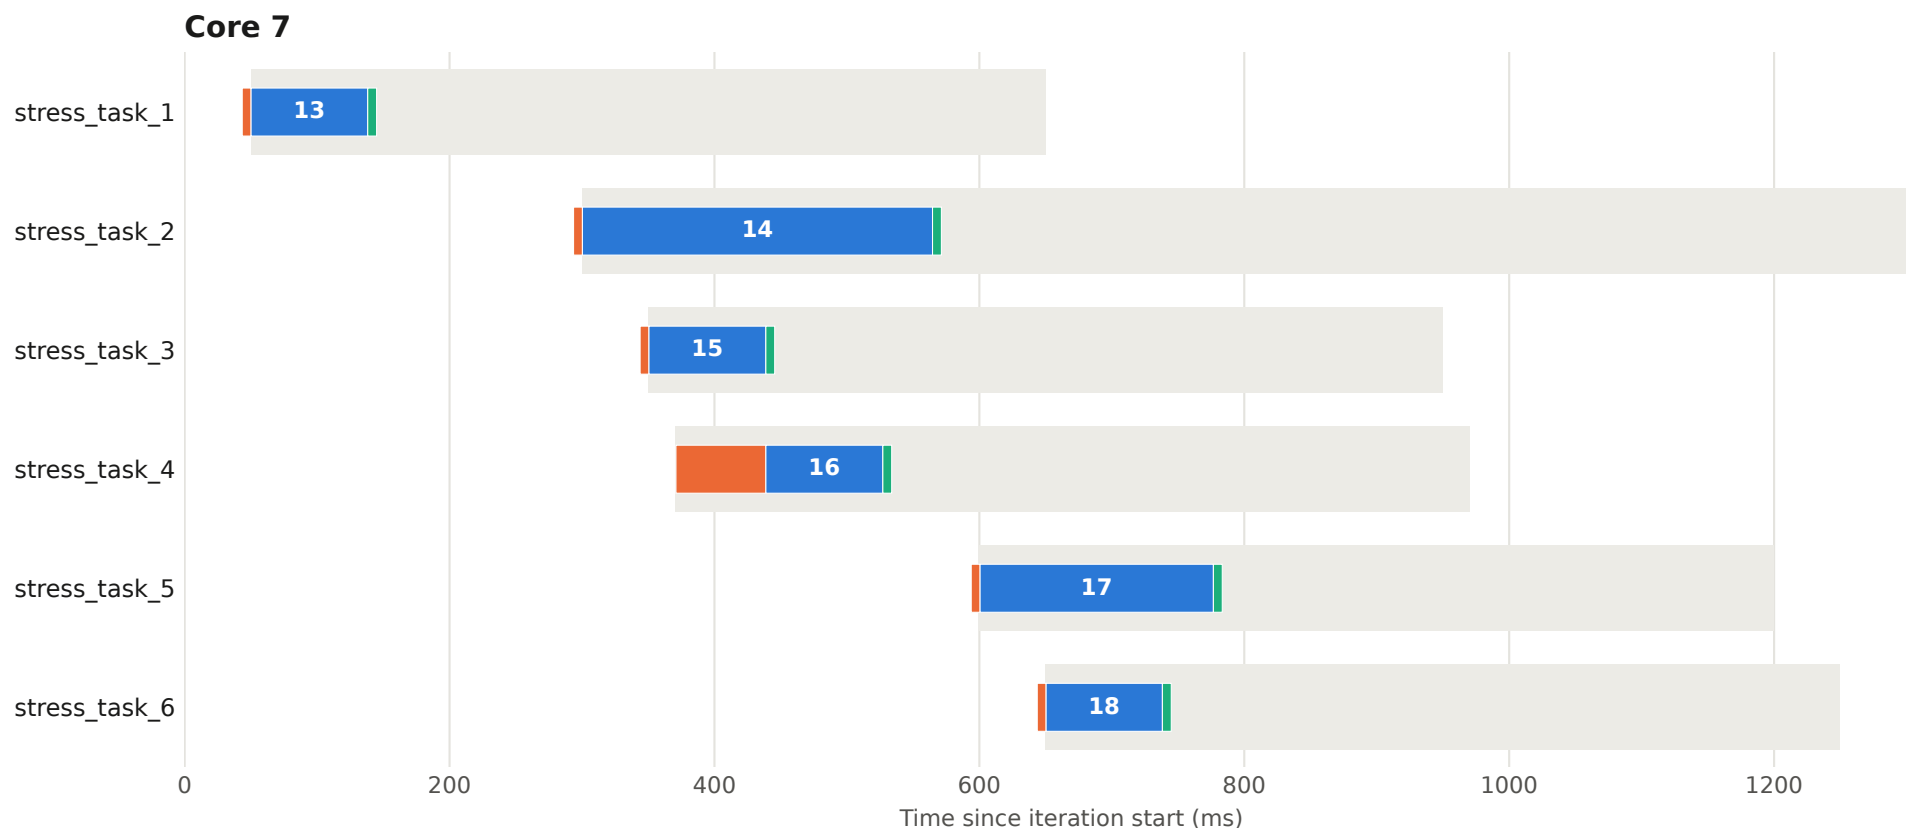


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 4 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

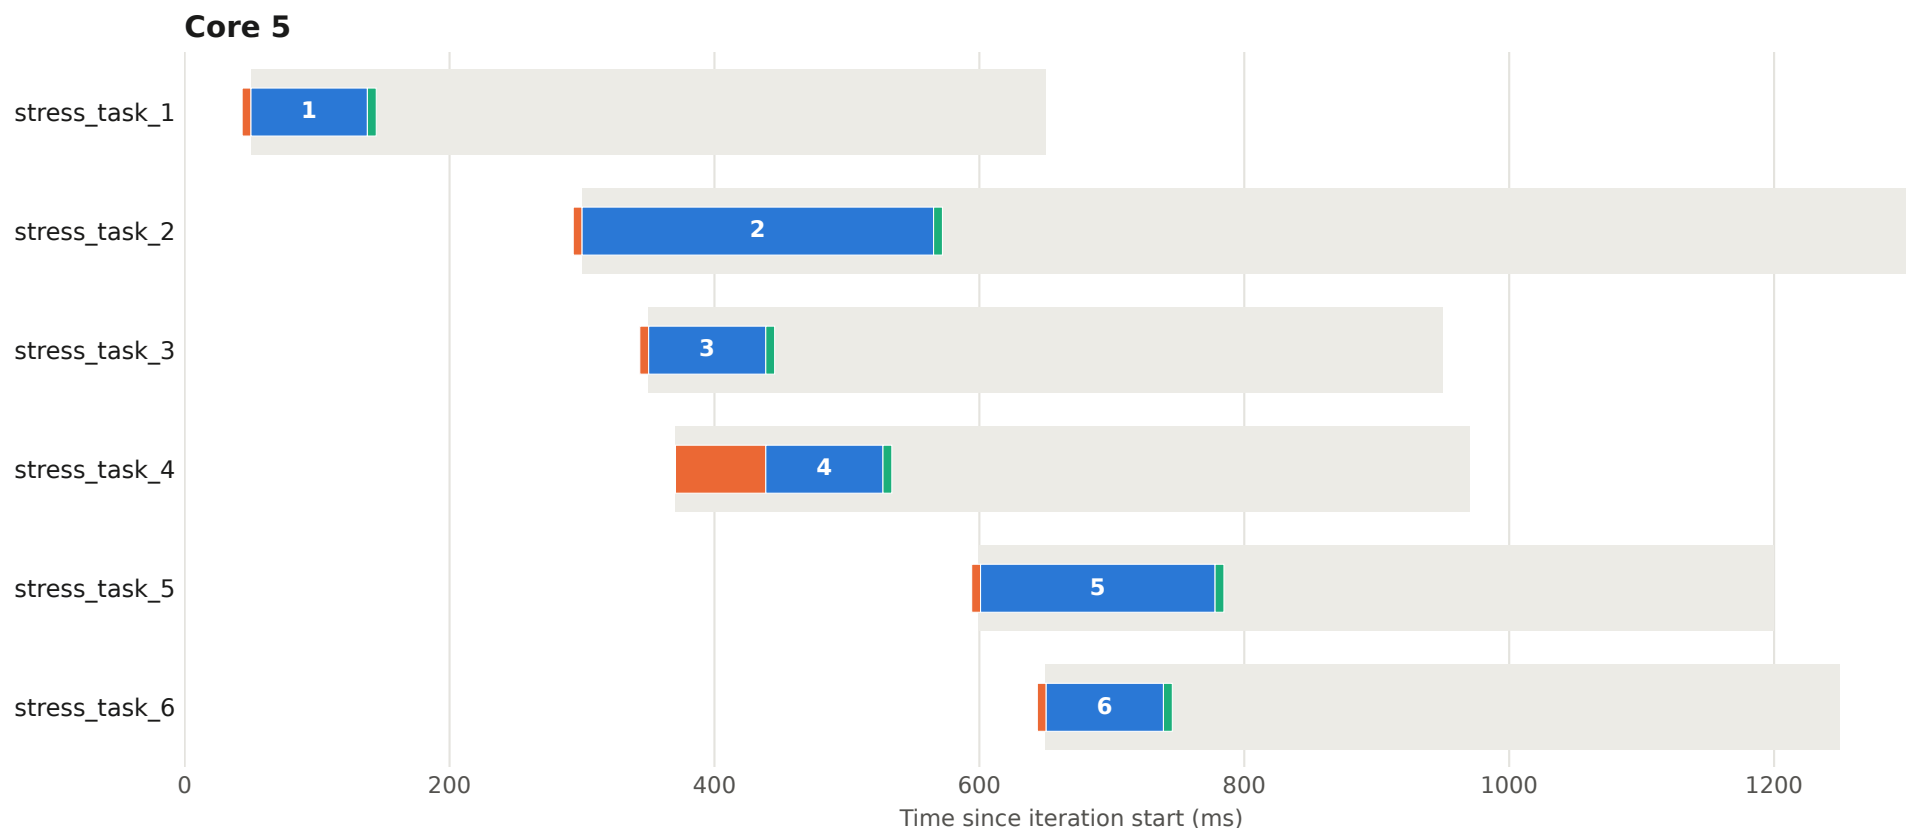


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 4 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

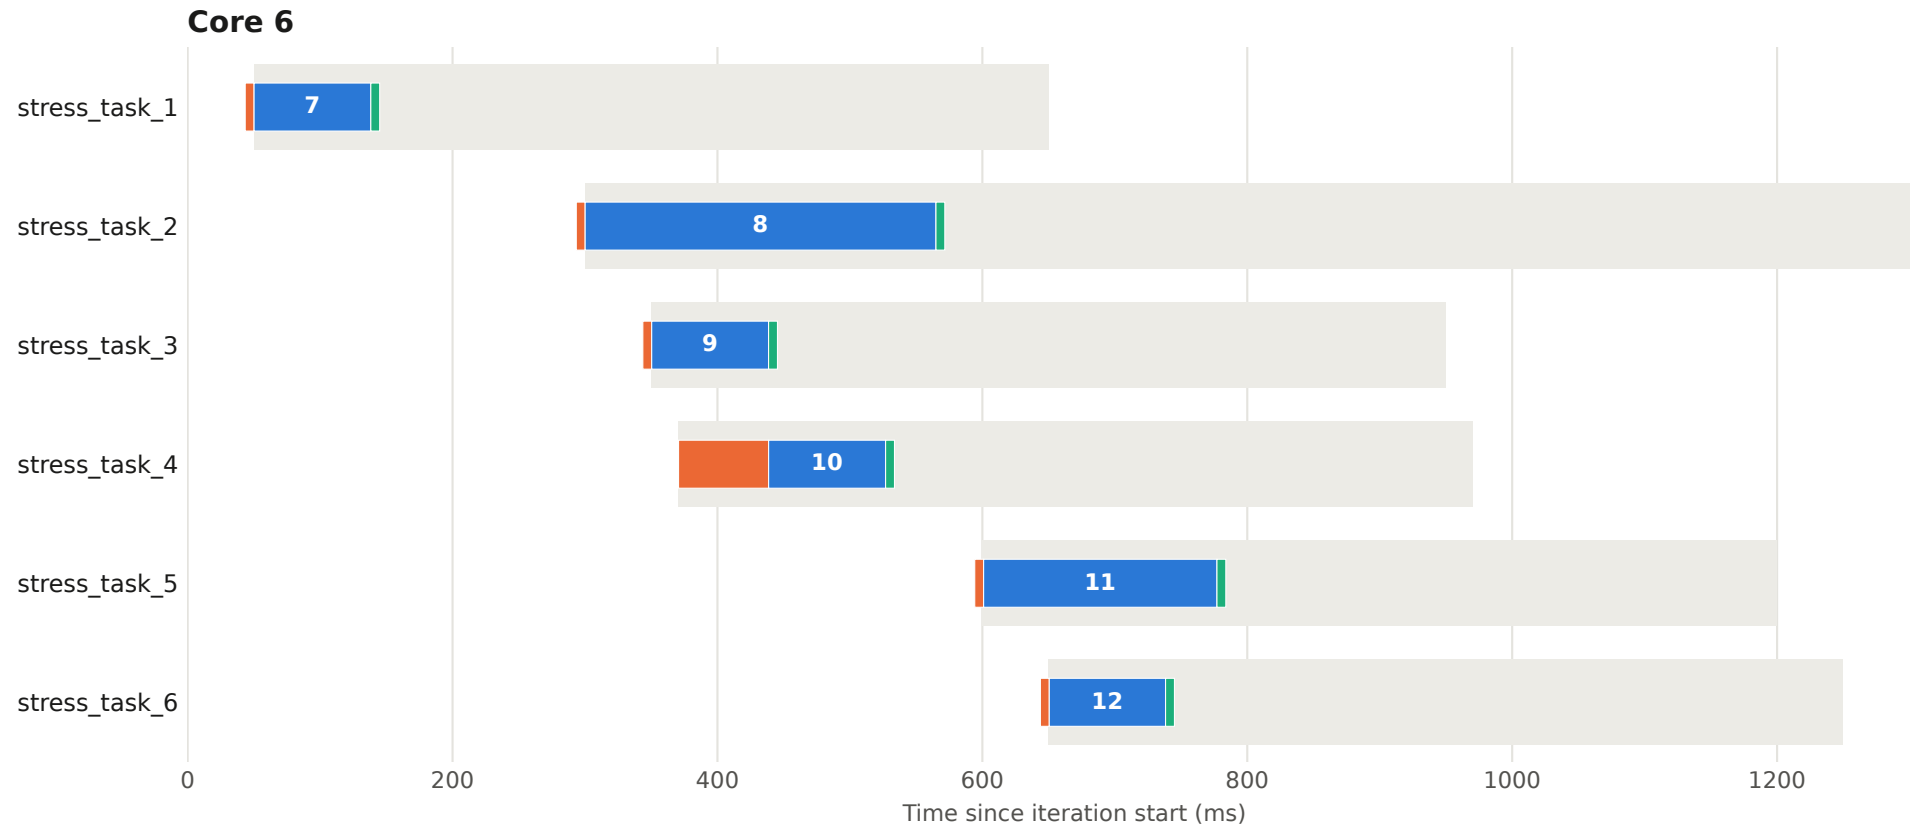


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 4 - core 7

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

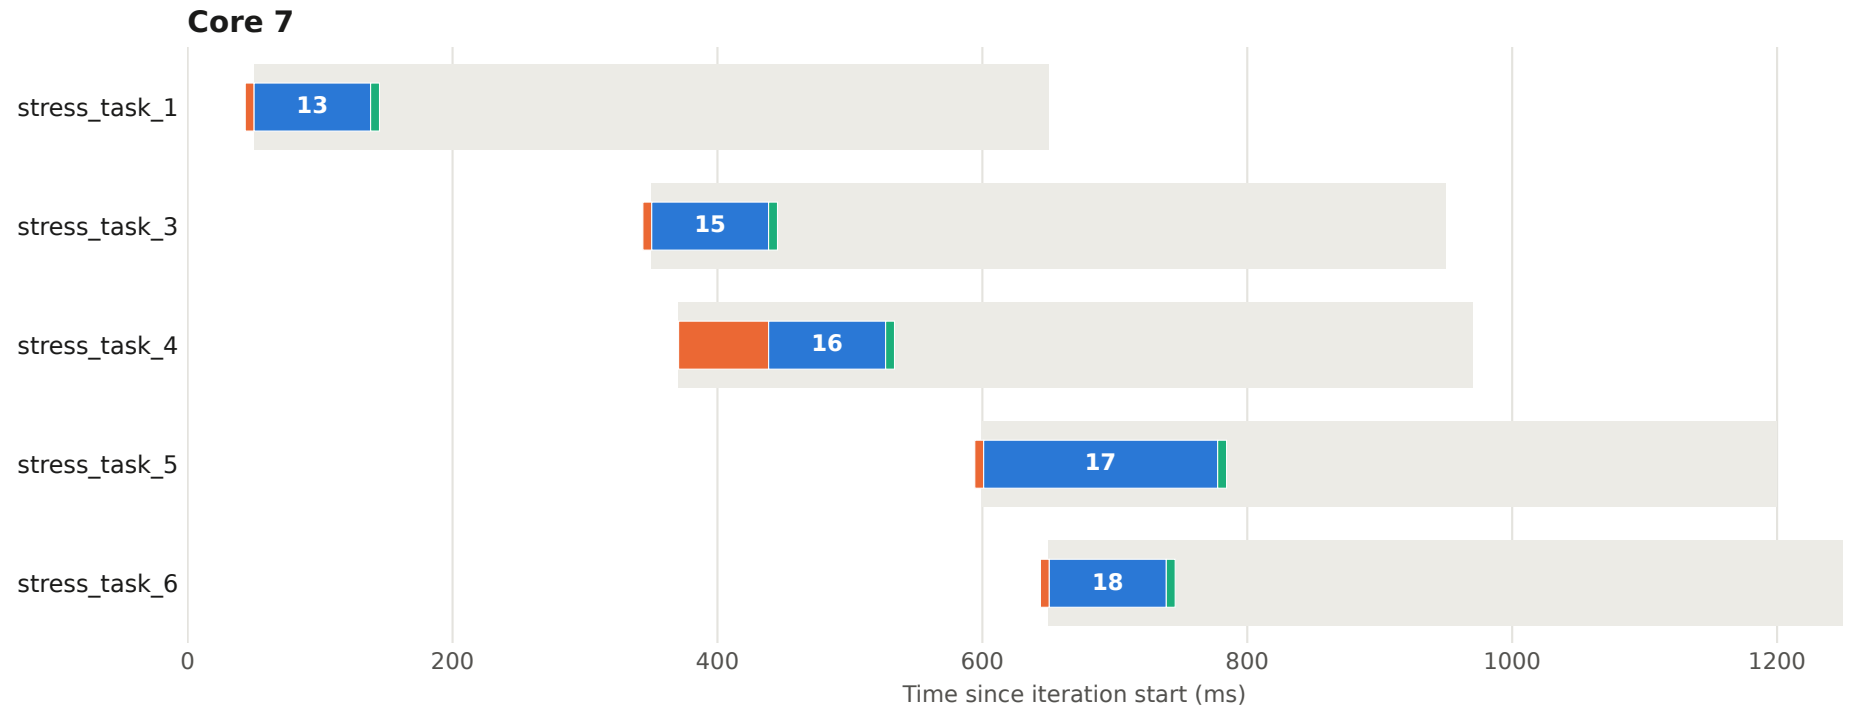

Execution plan - iteration 5 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

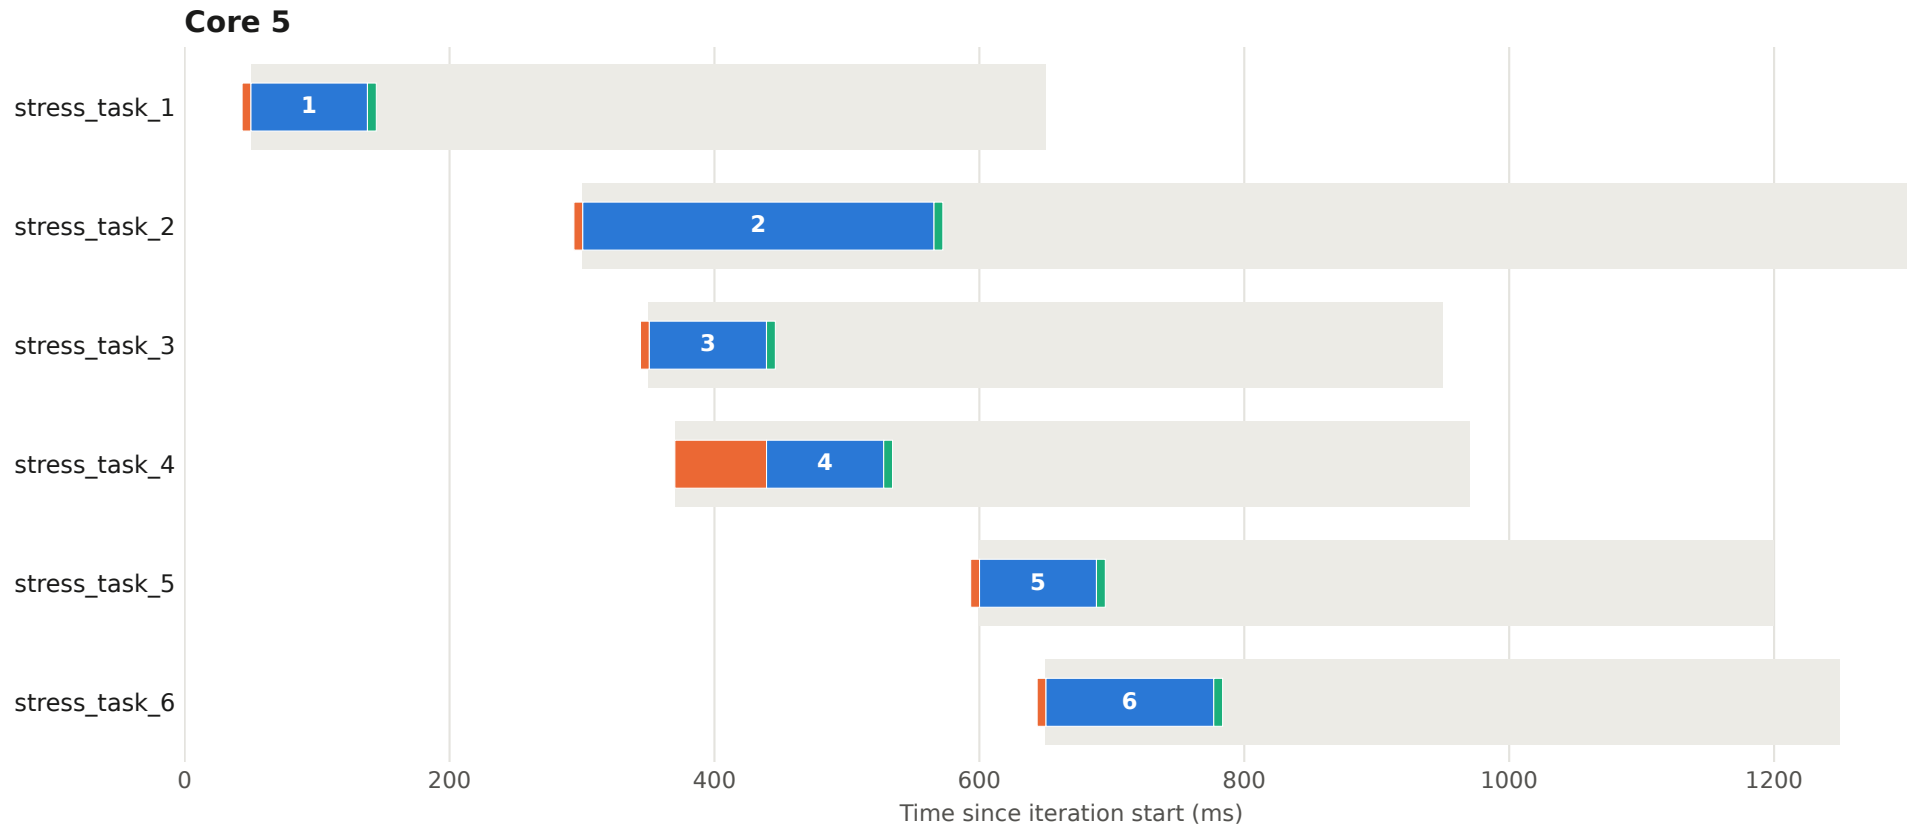


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 5 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

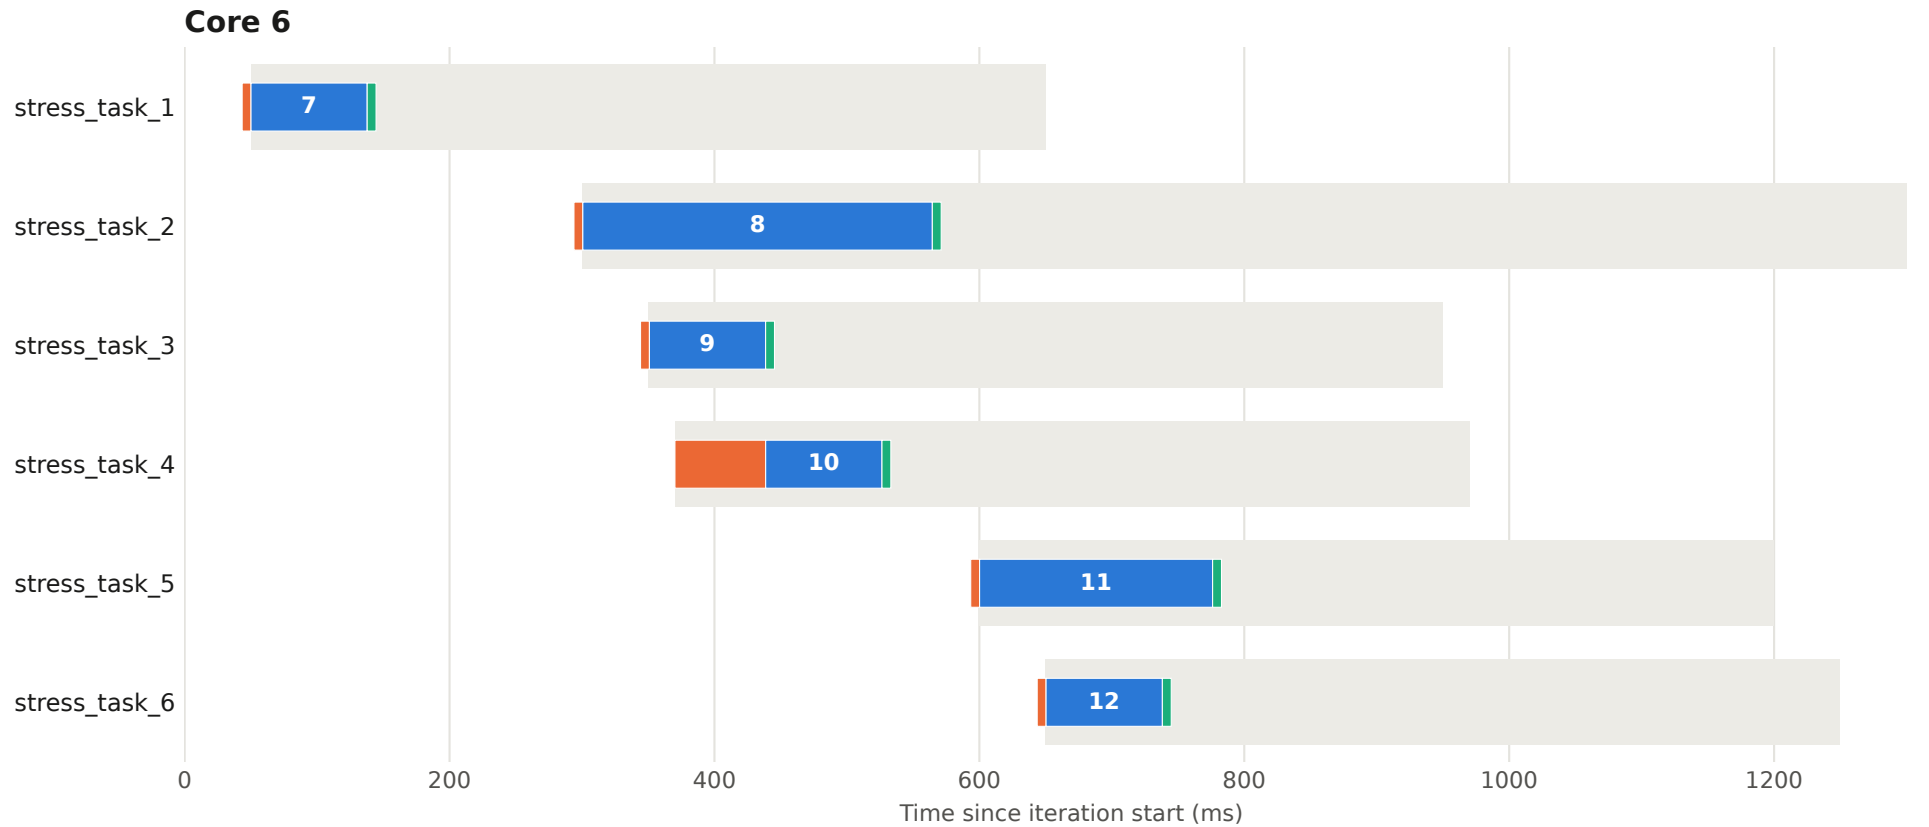


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 5 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

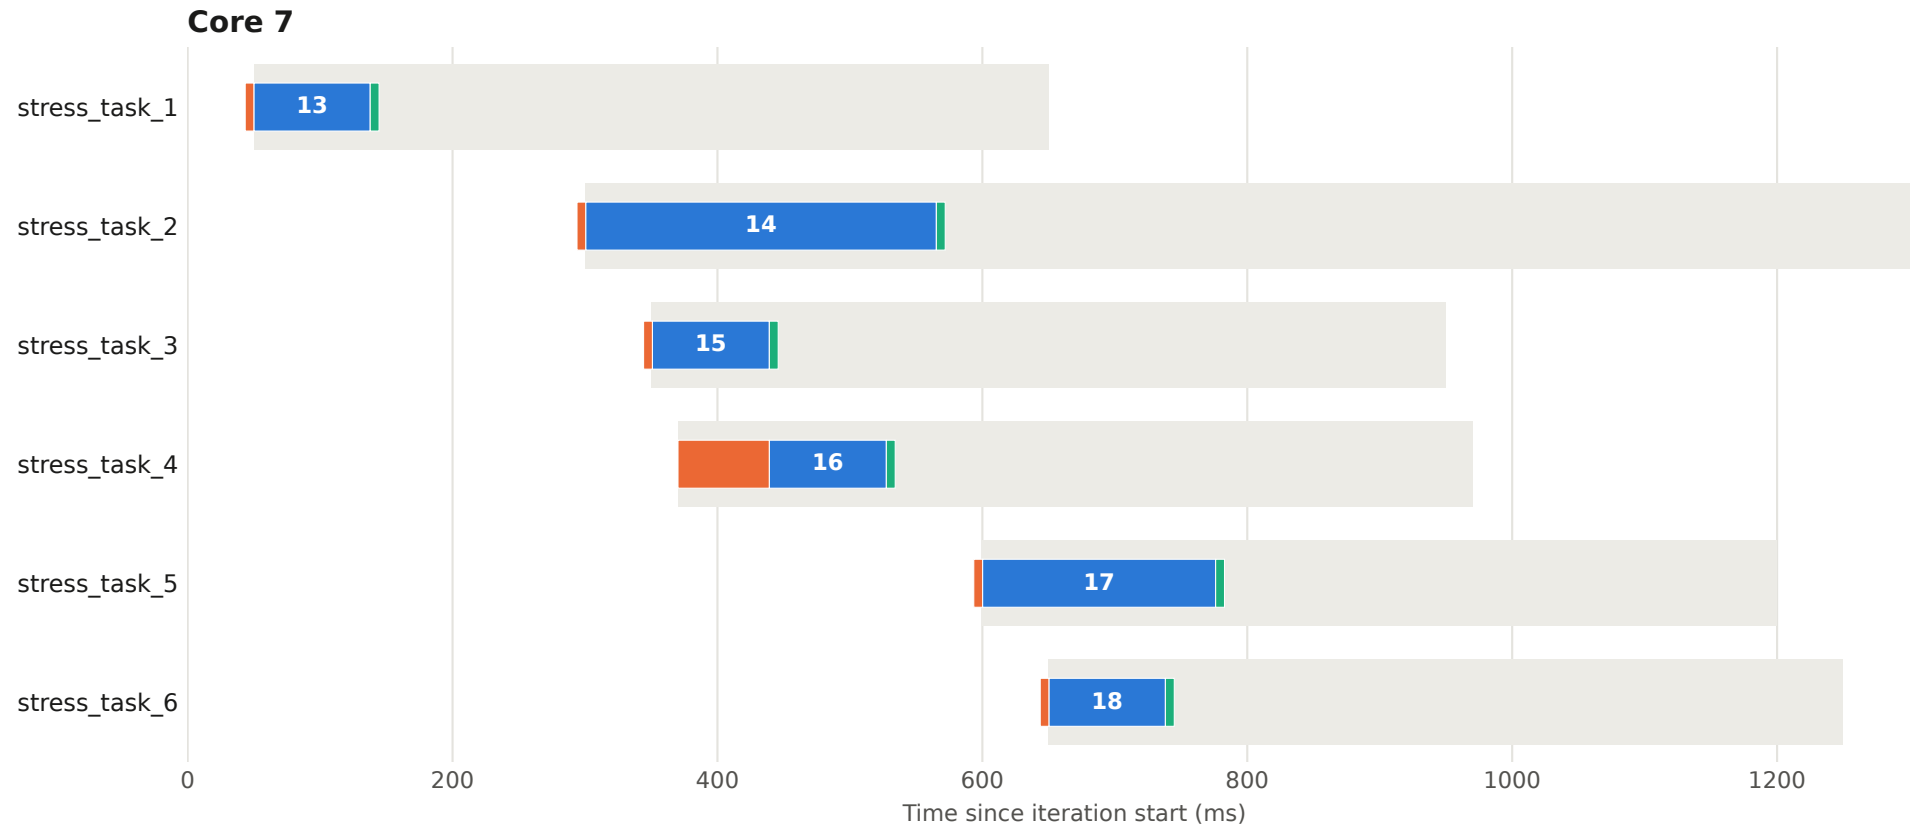


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 6 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

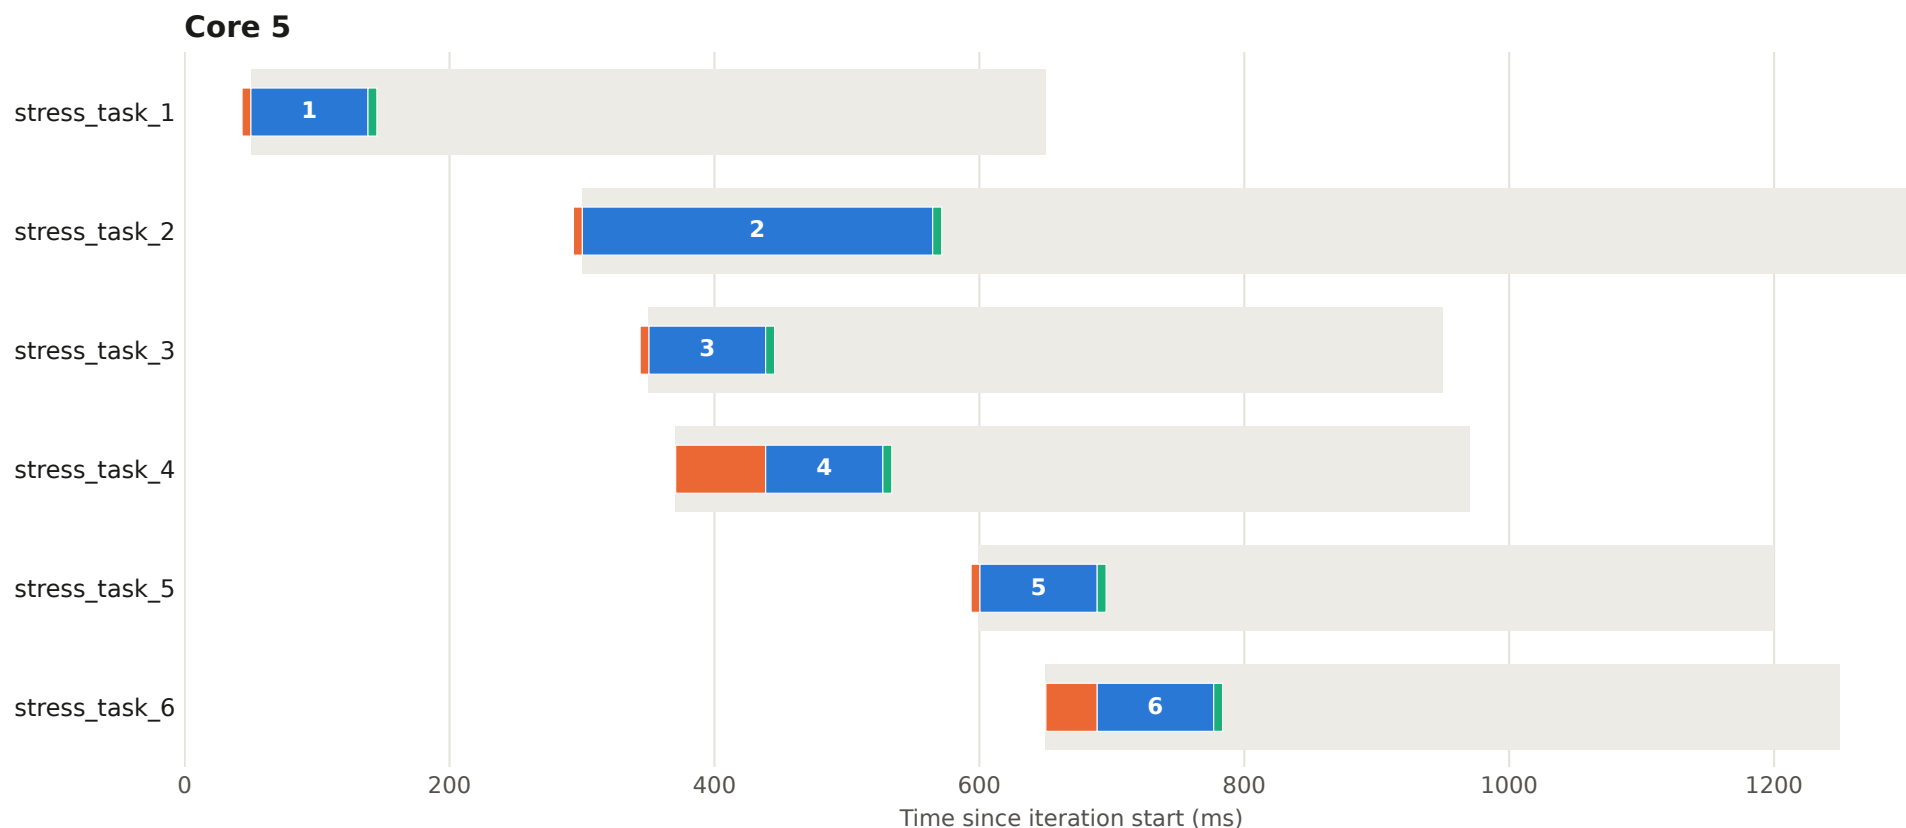


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 6 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

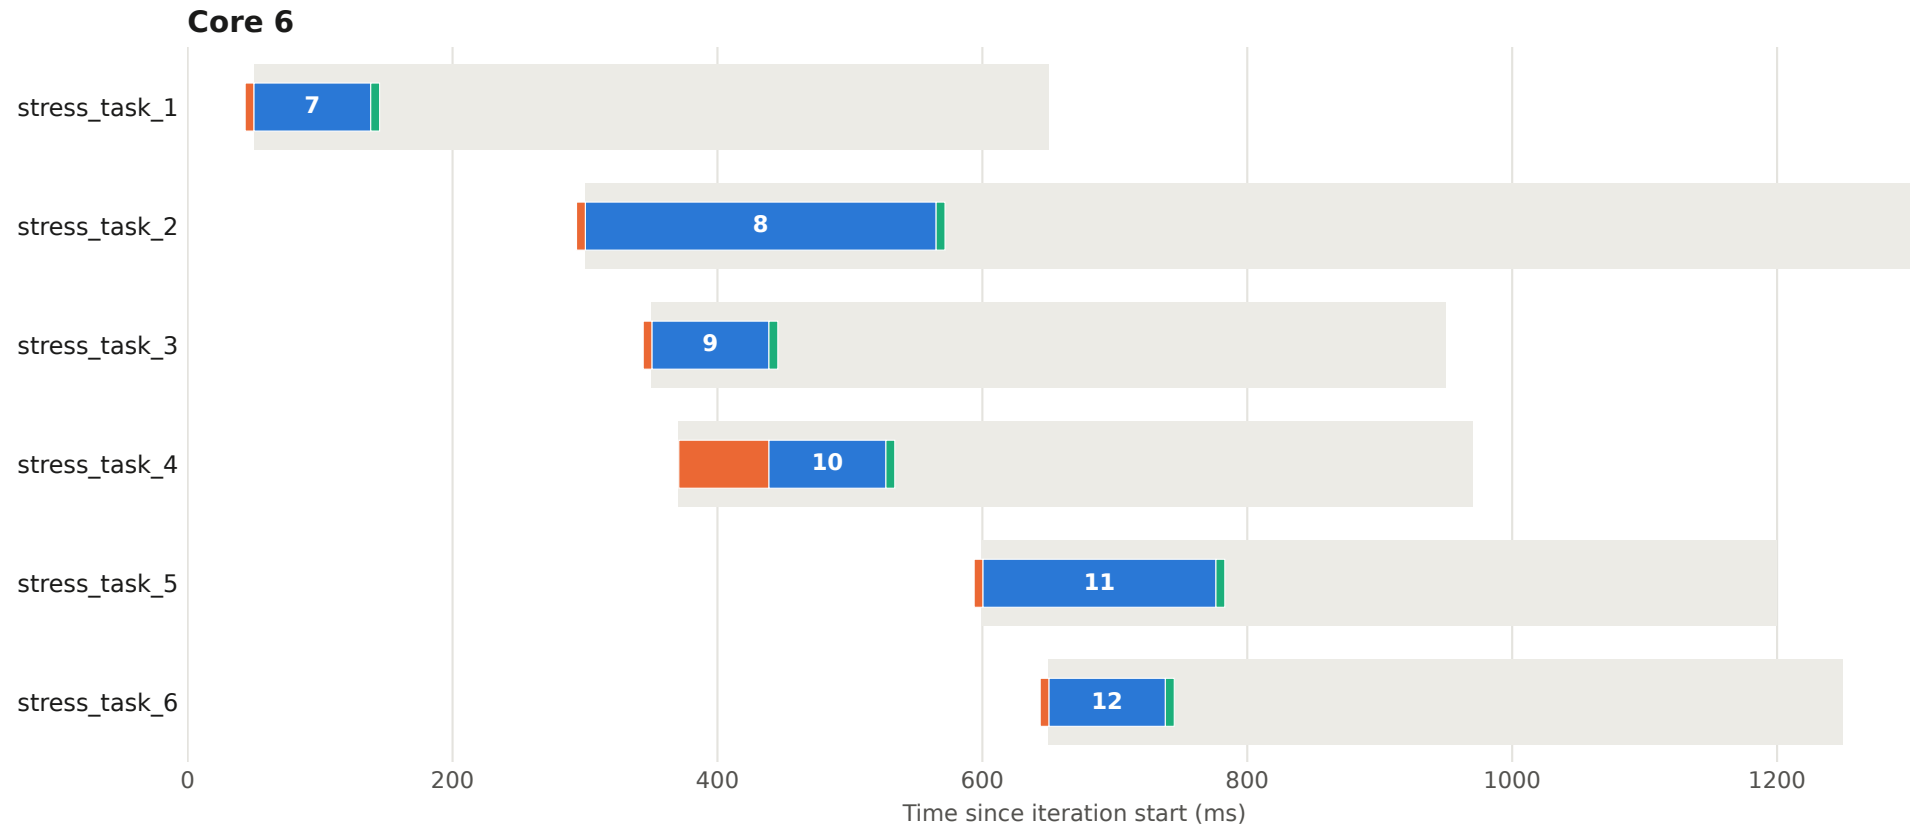


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 6 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

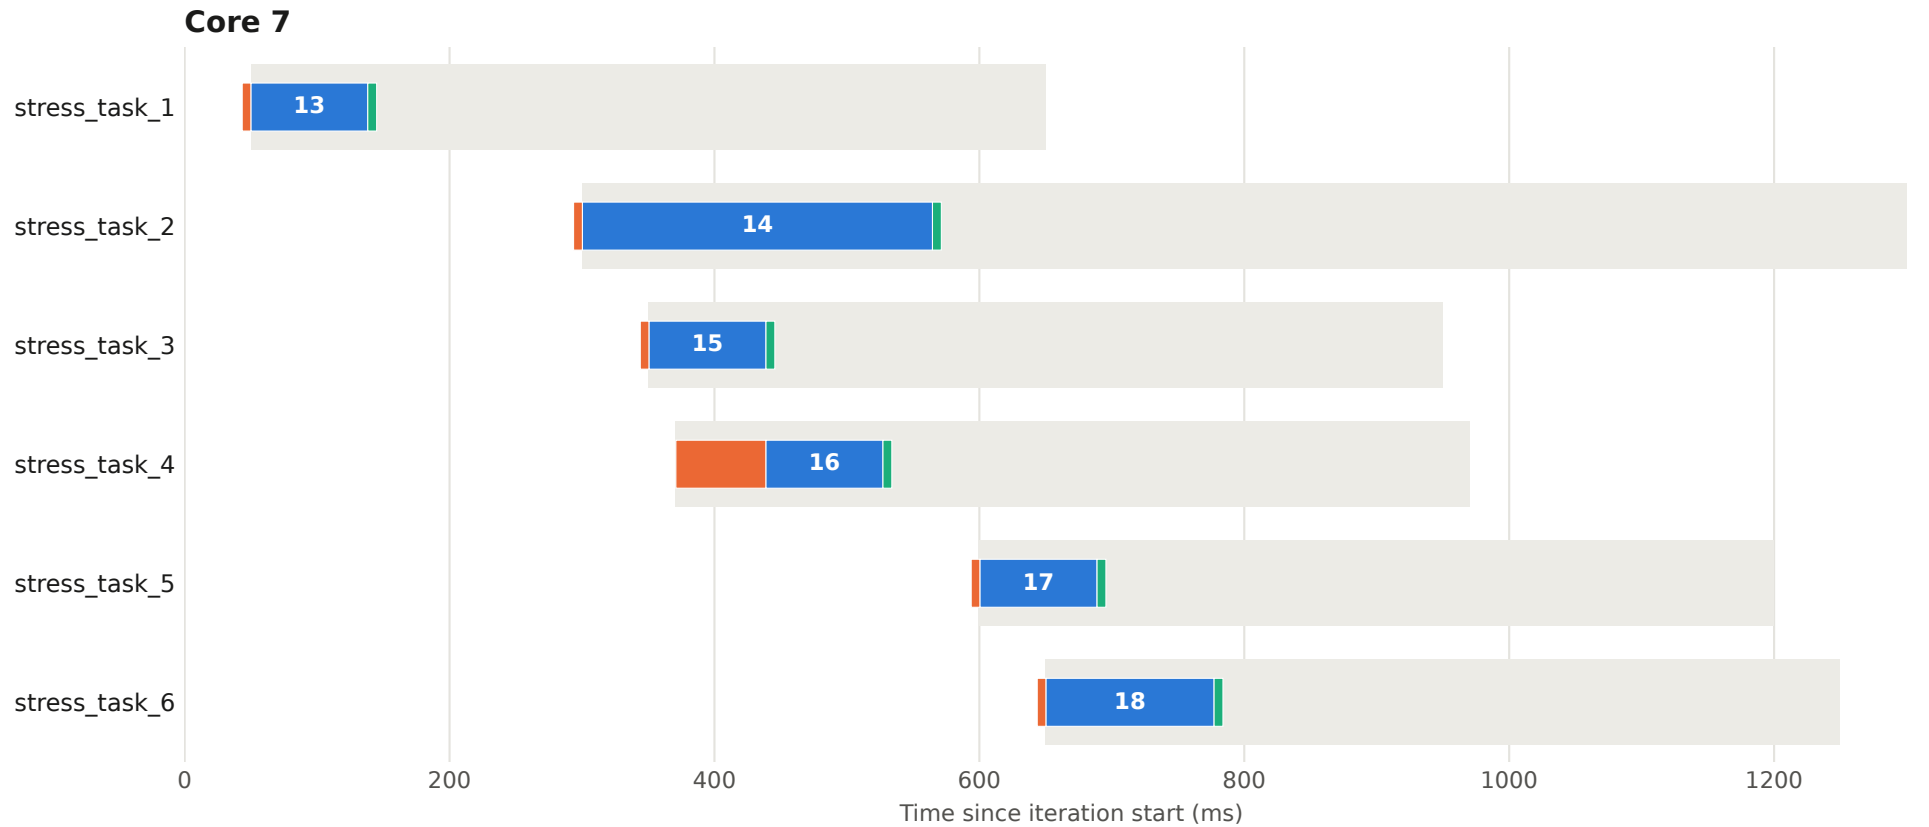


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 7 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

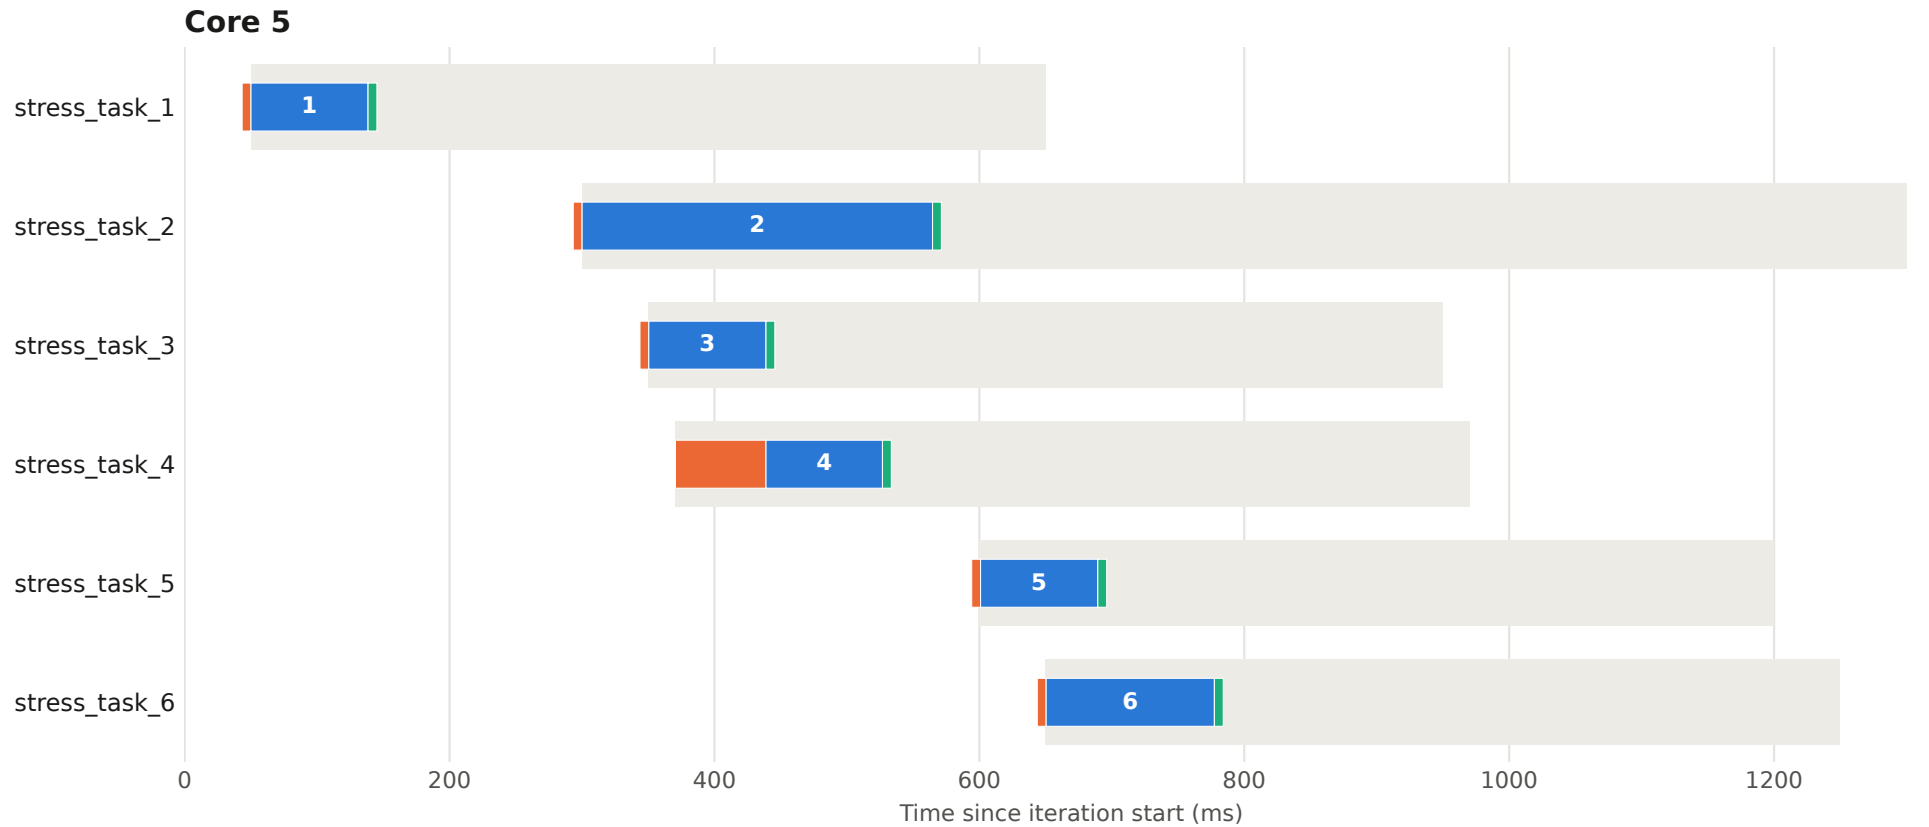


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 7 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

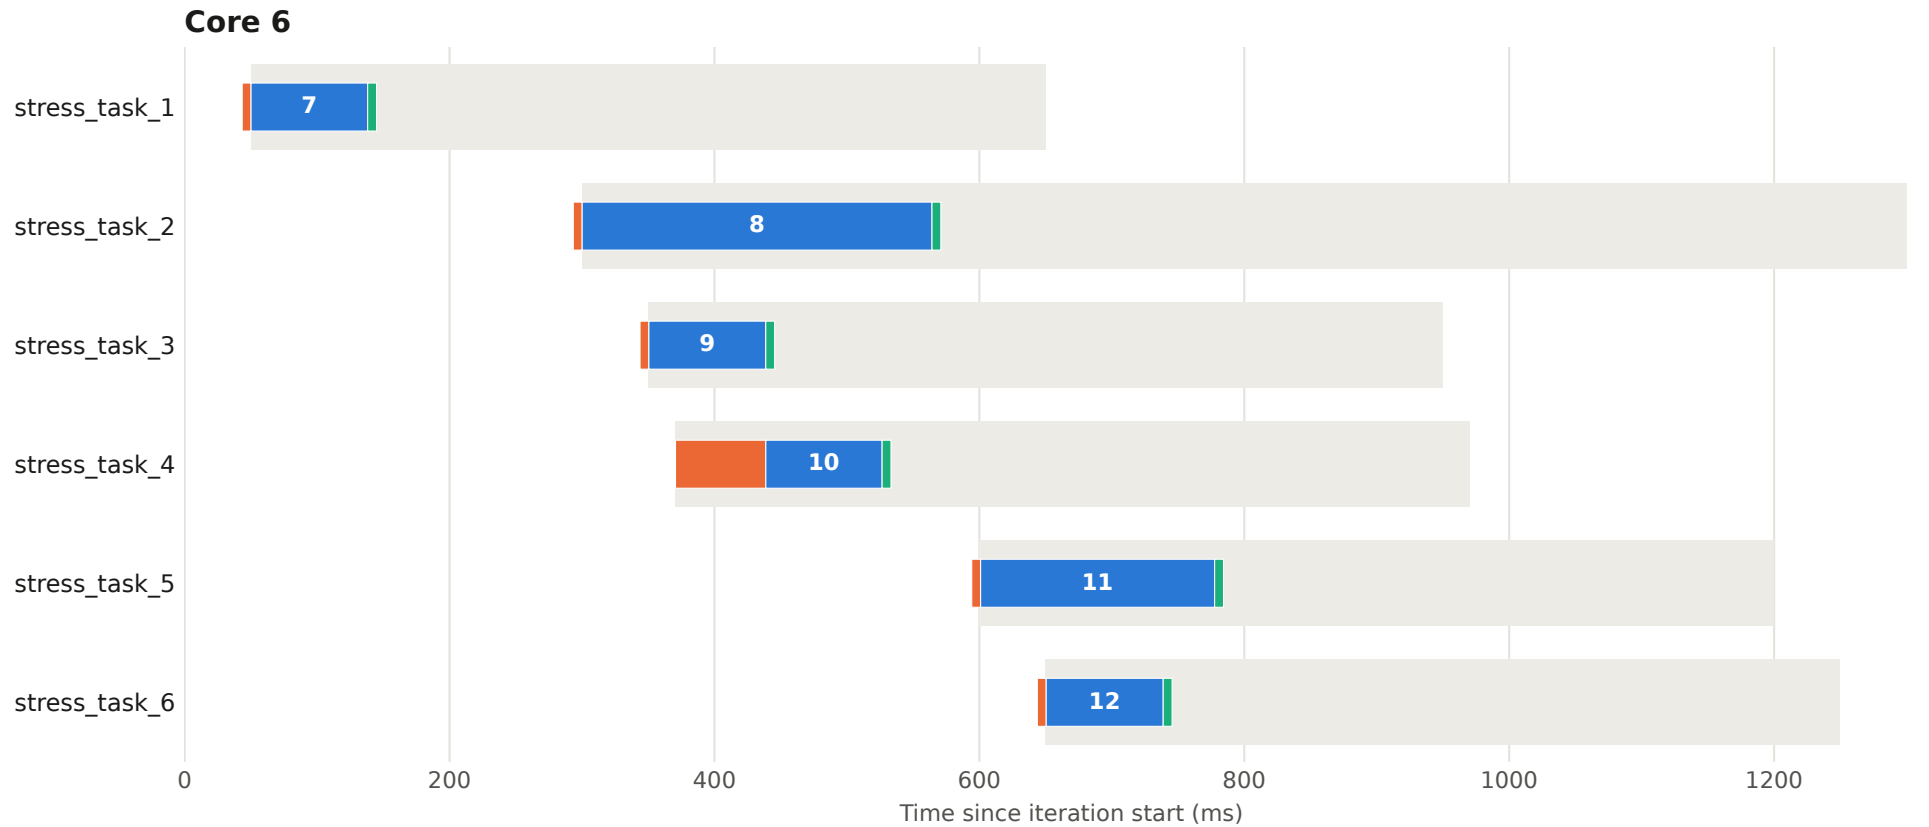


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 7 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

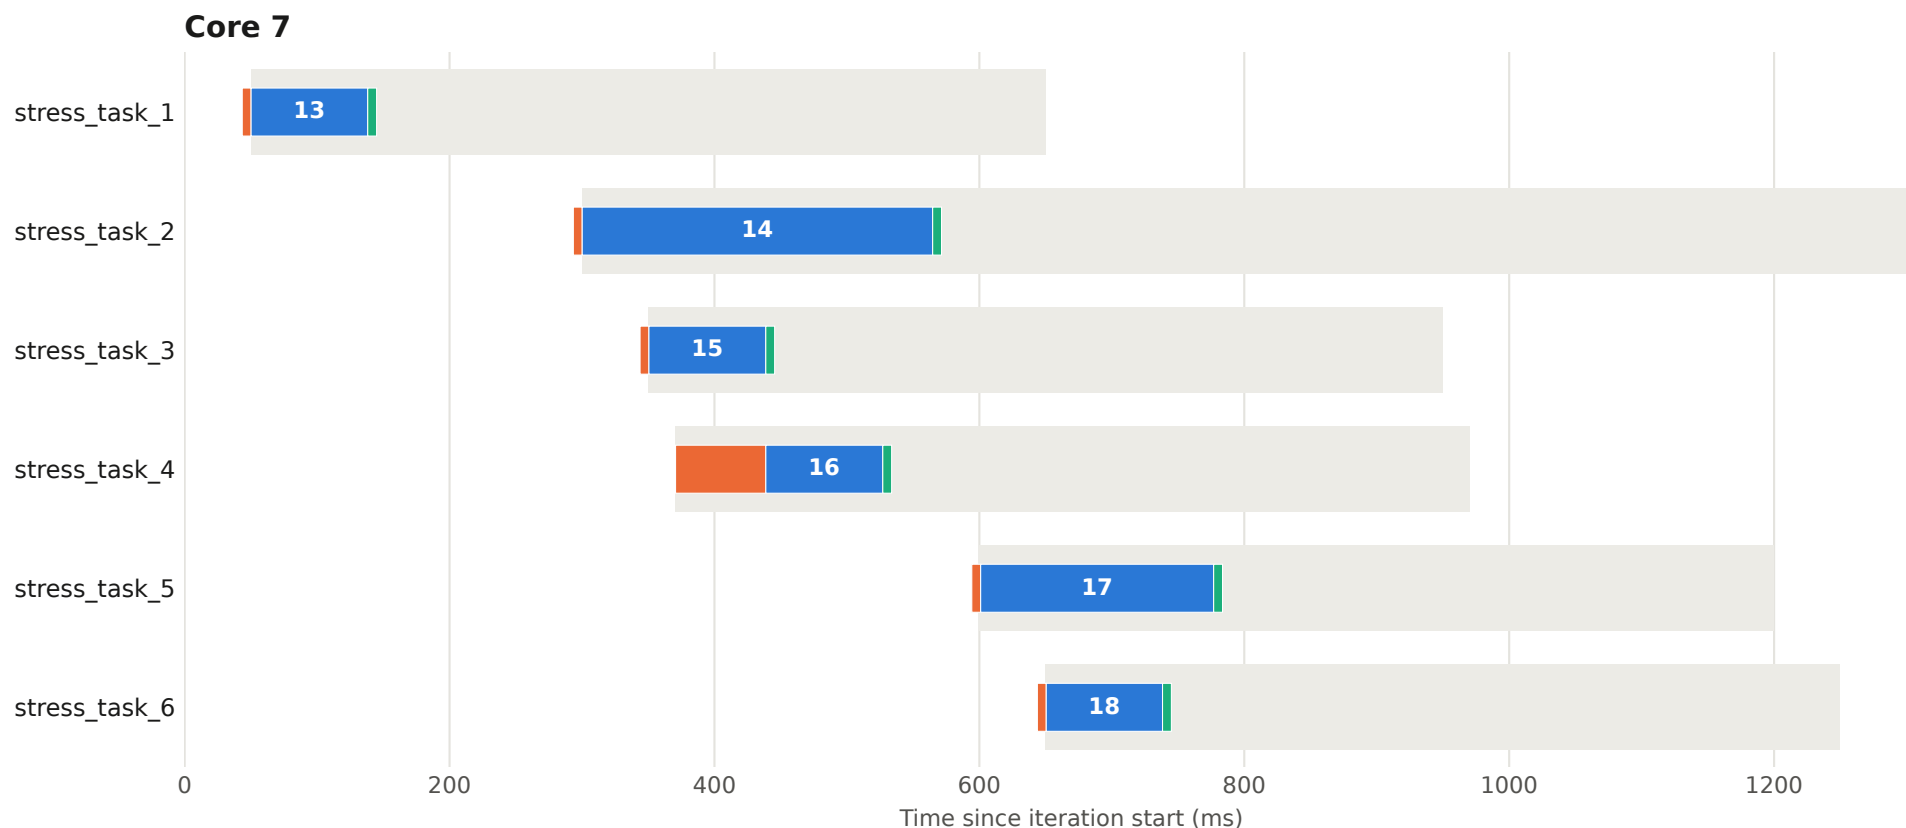


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 8 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

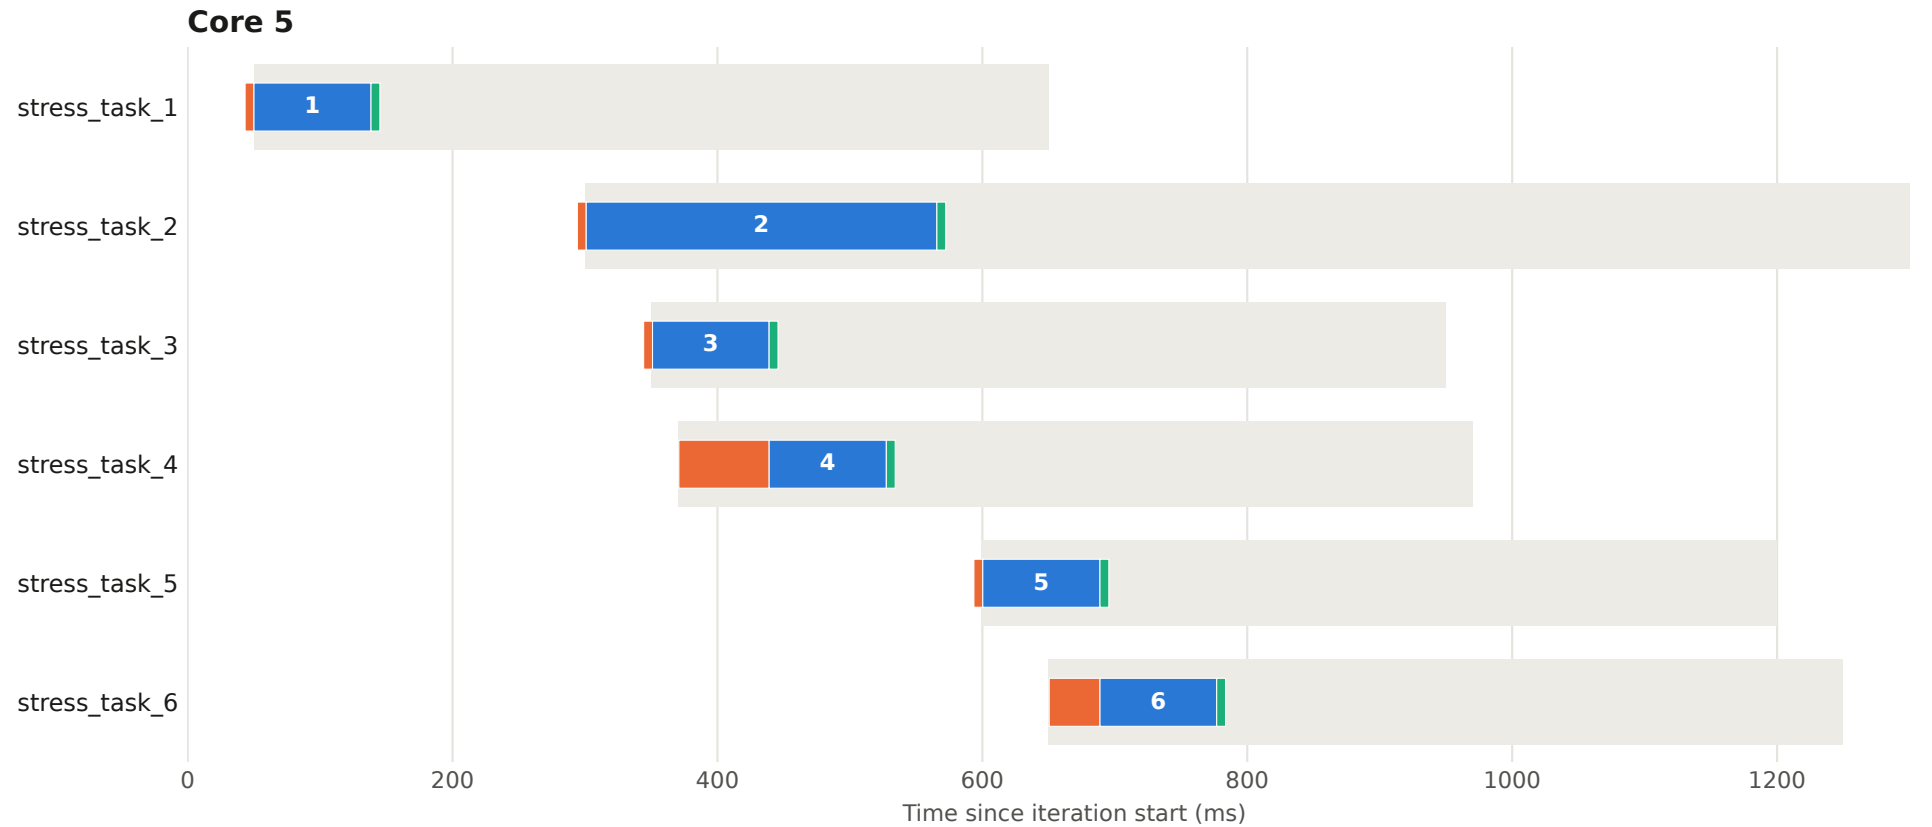


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 8 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

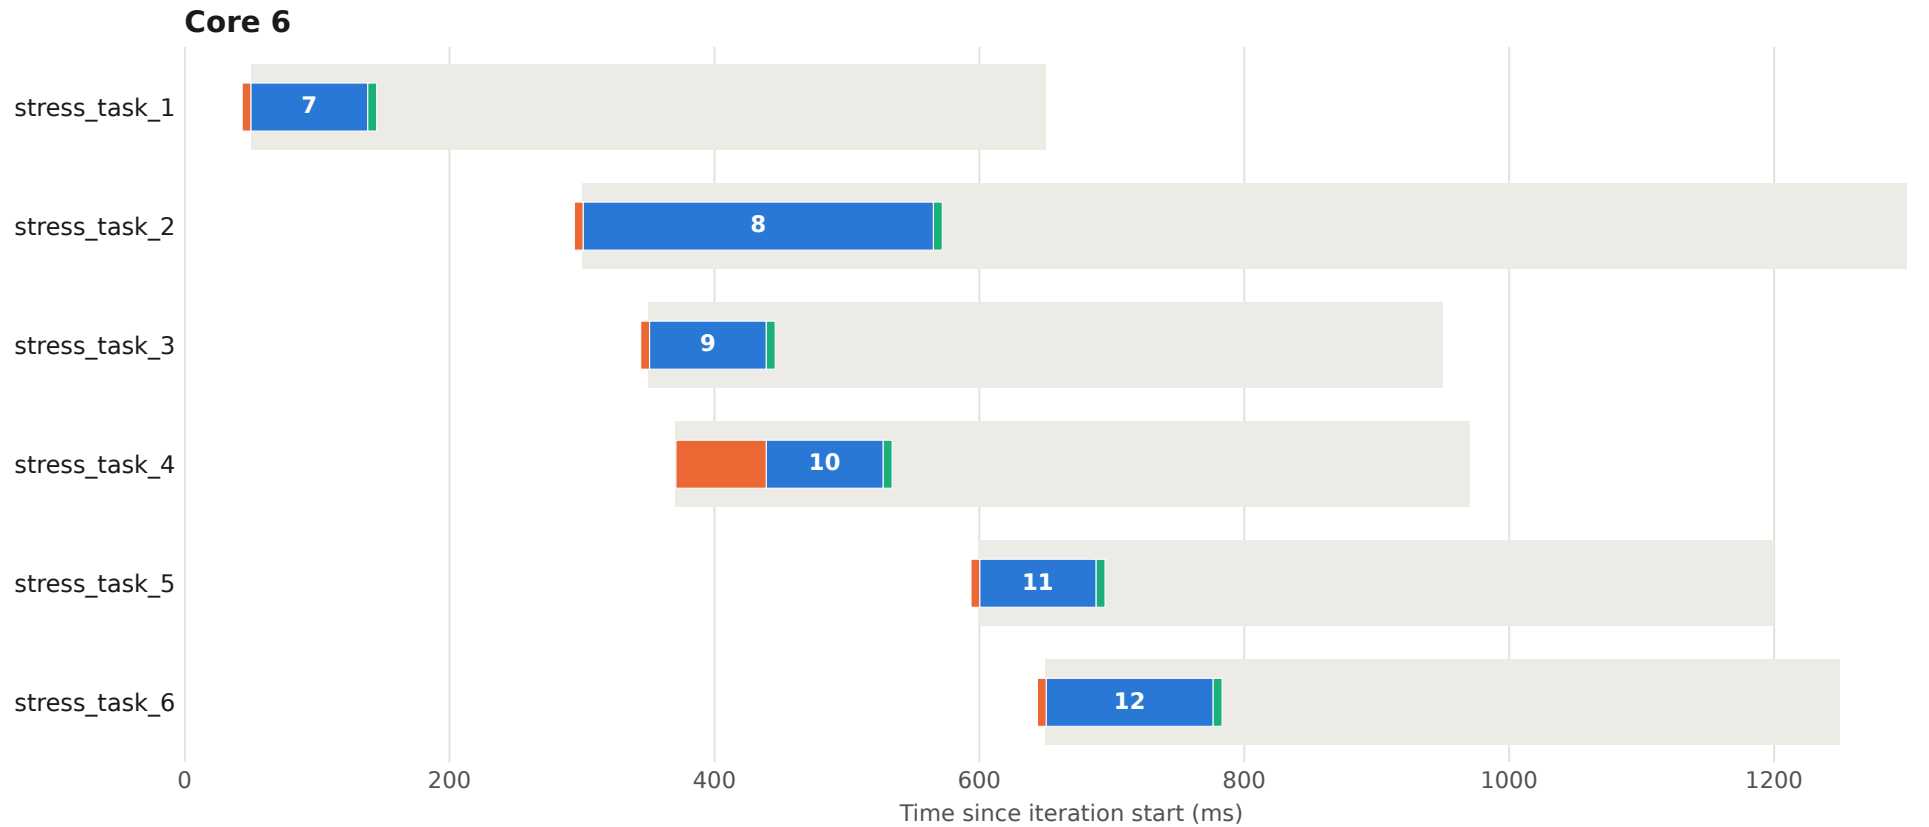


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 8 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

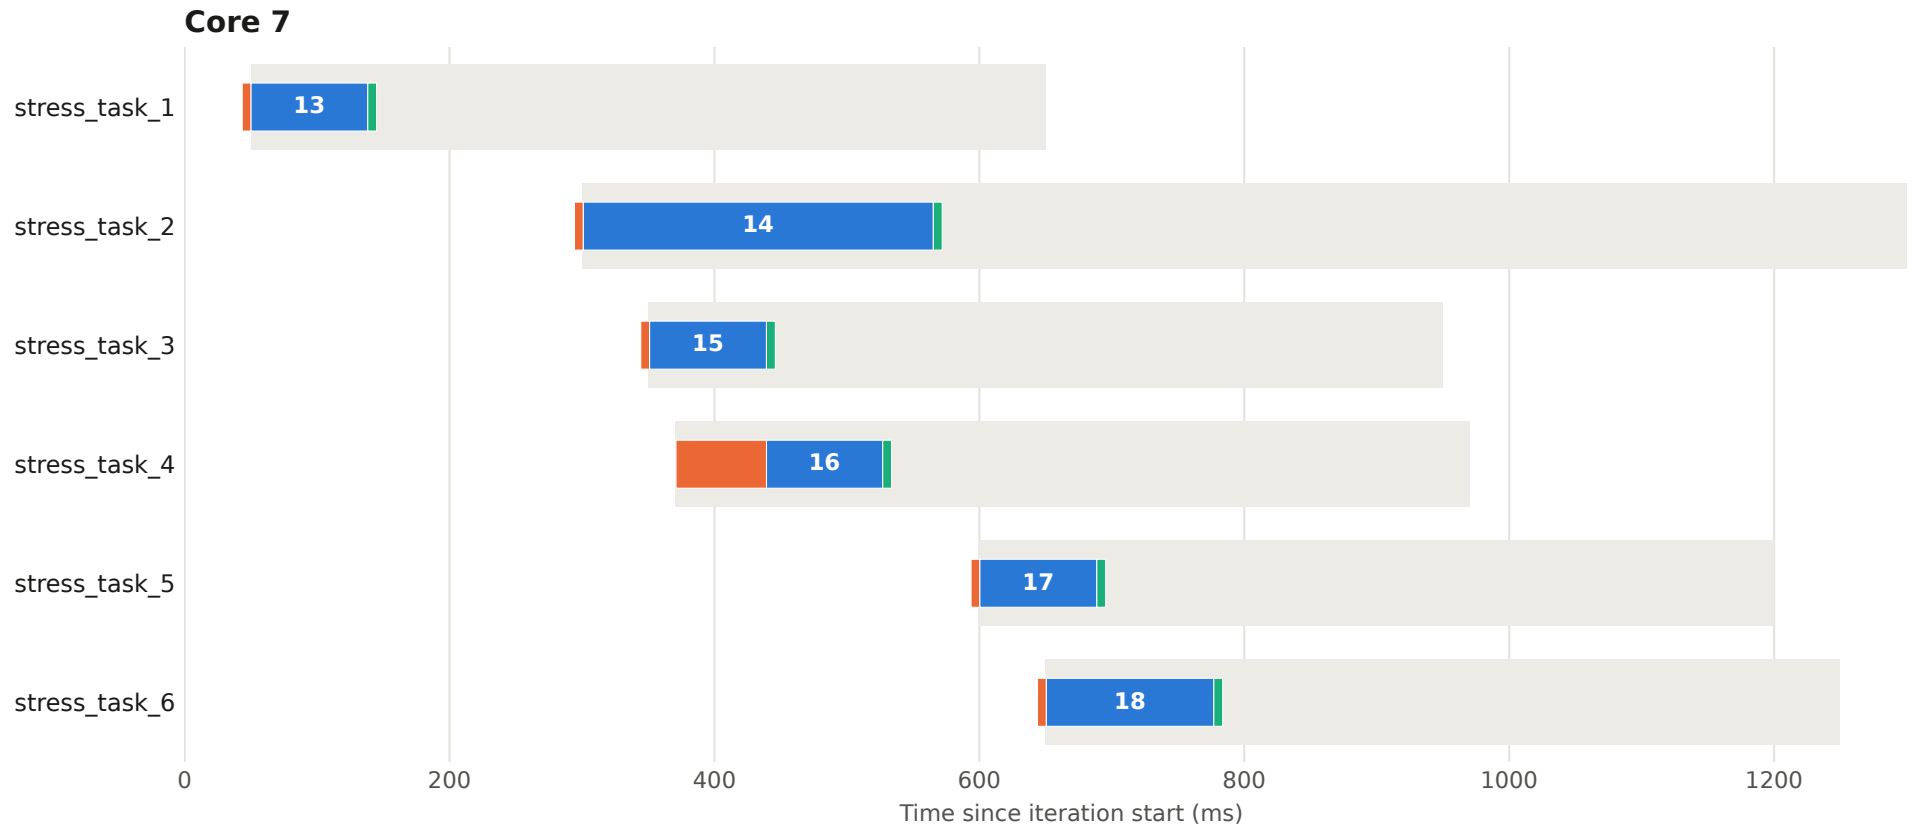


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 9 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

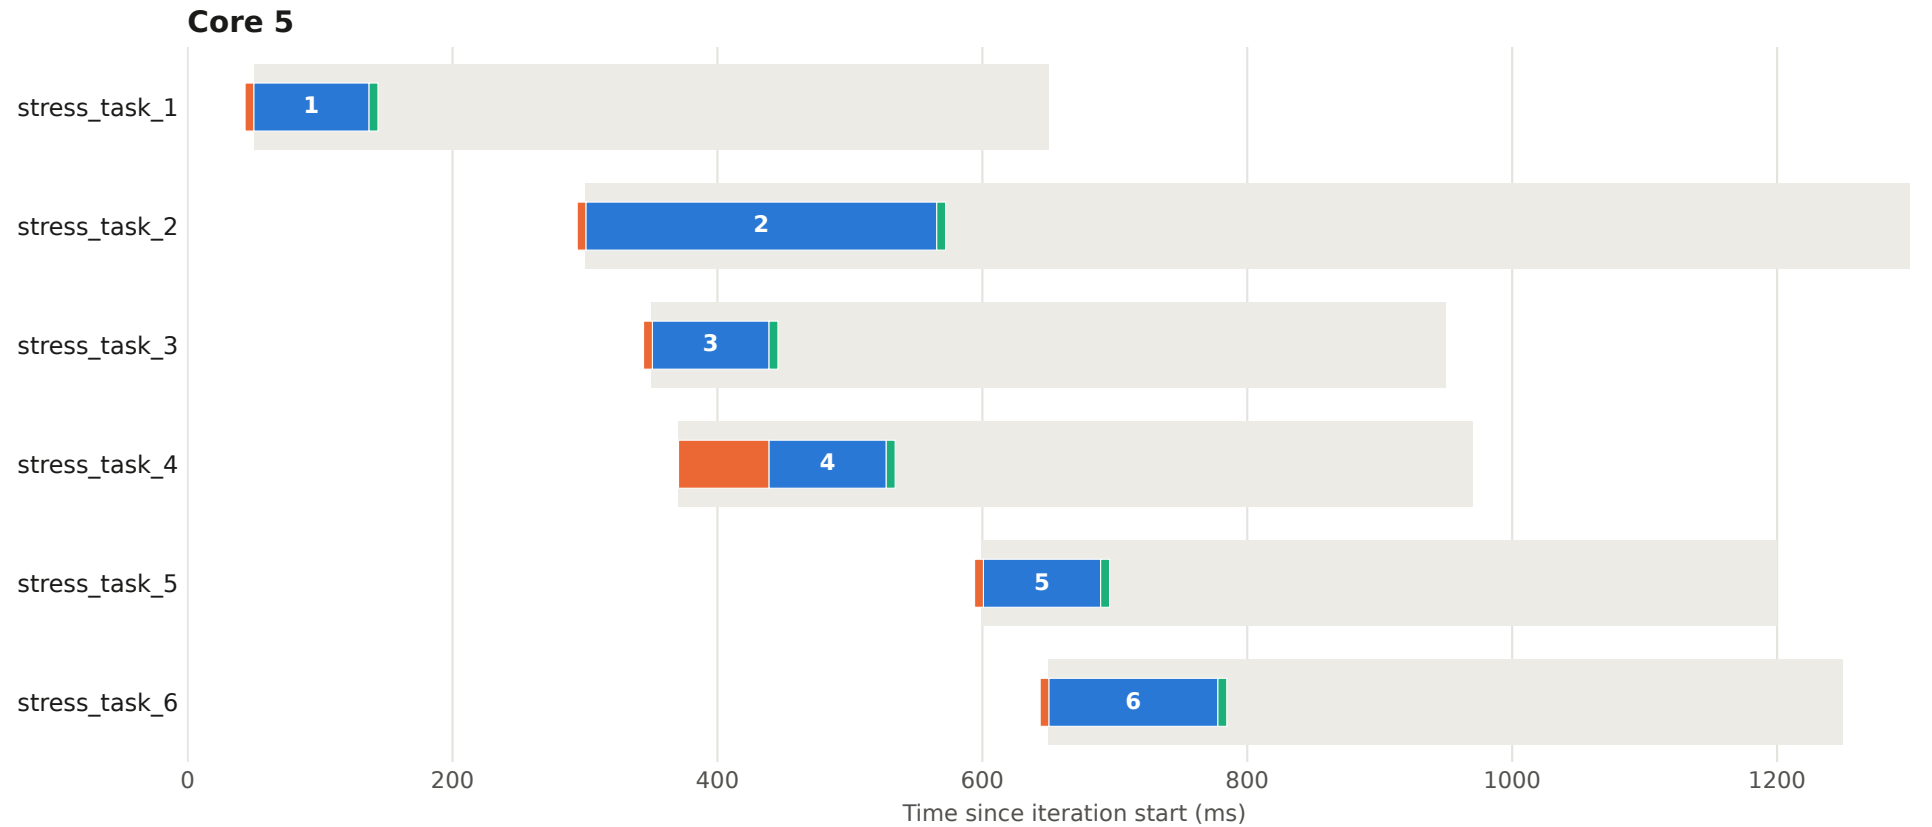


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 9 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

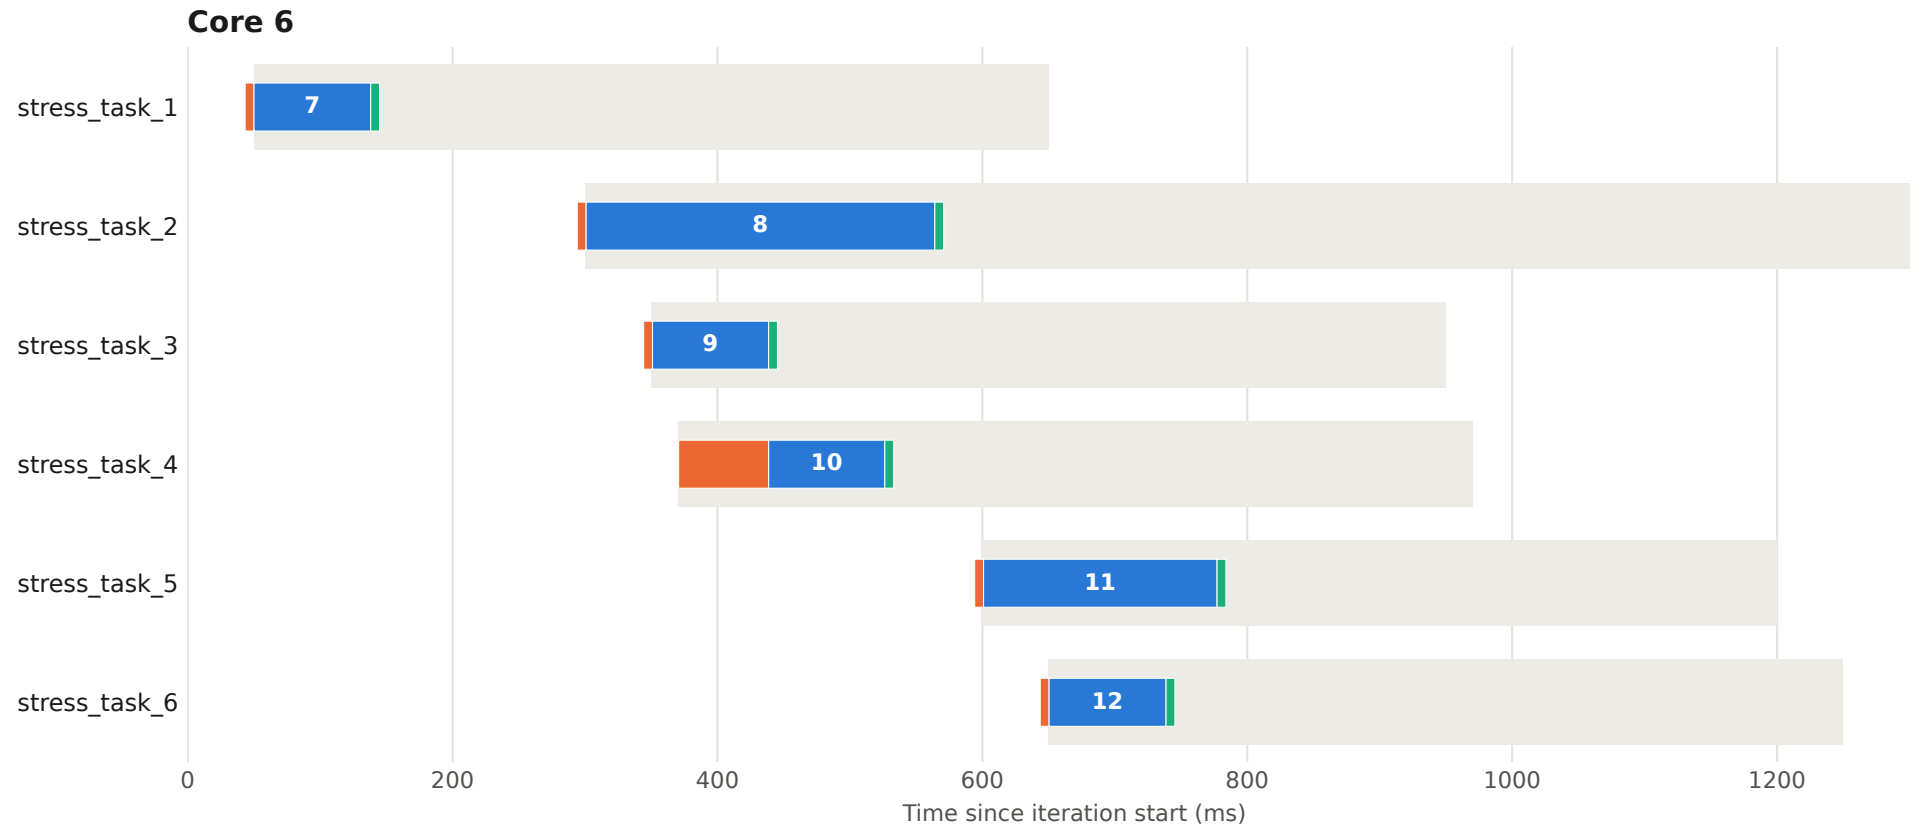


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 9 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

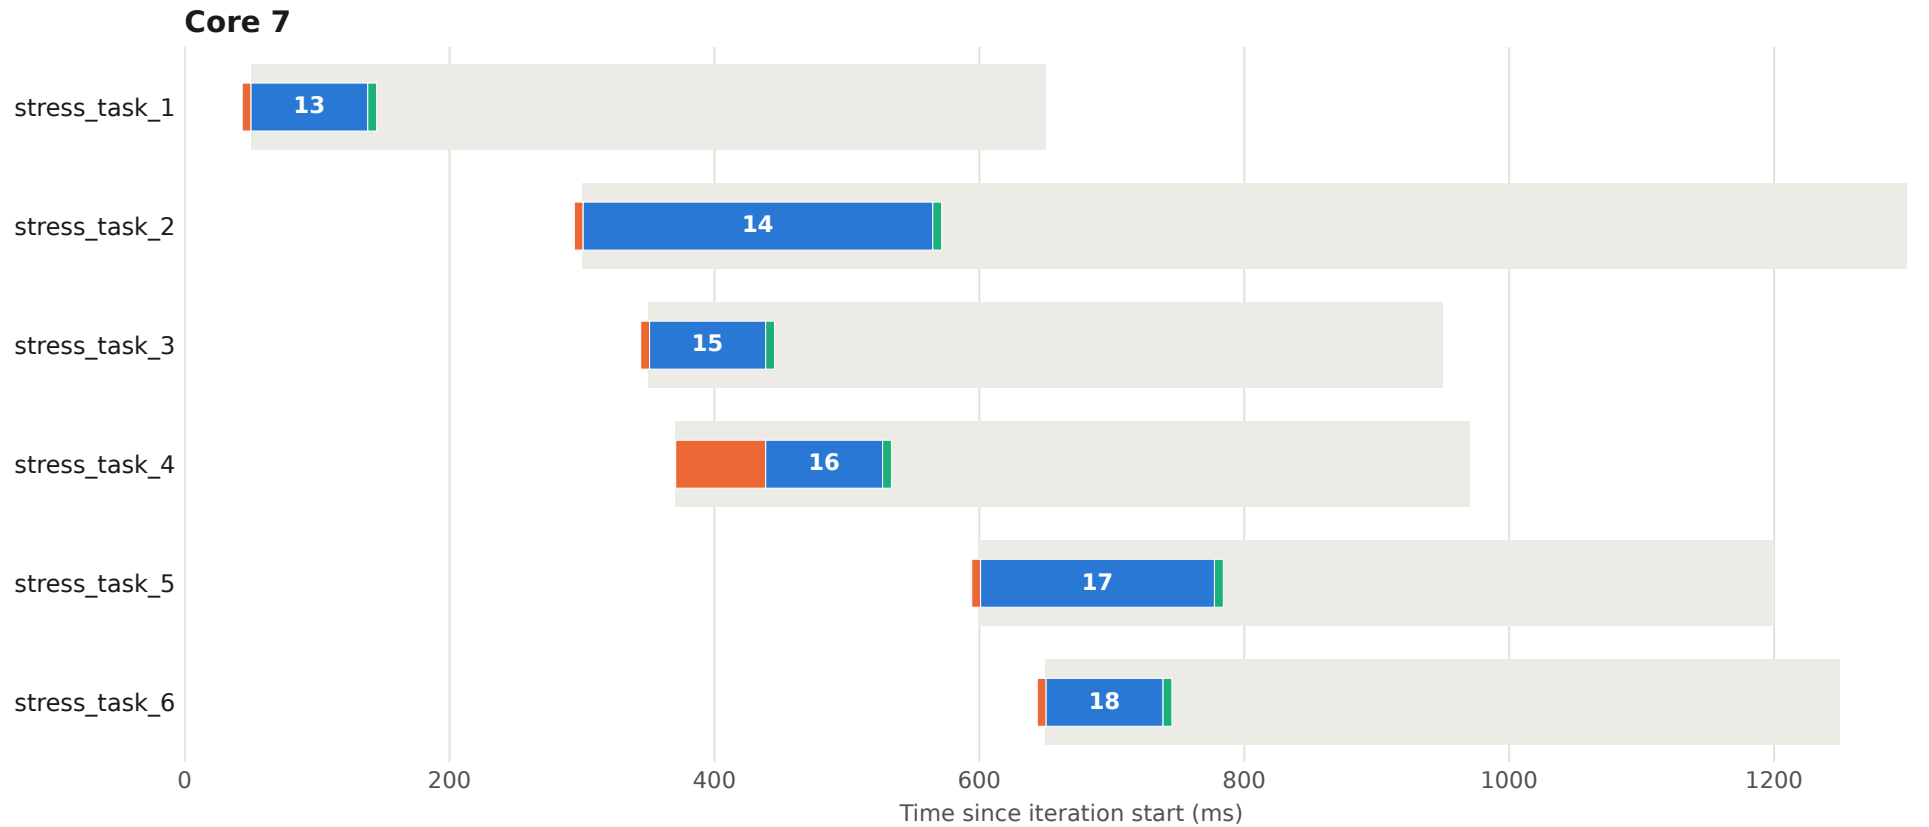


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 10 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

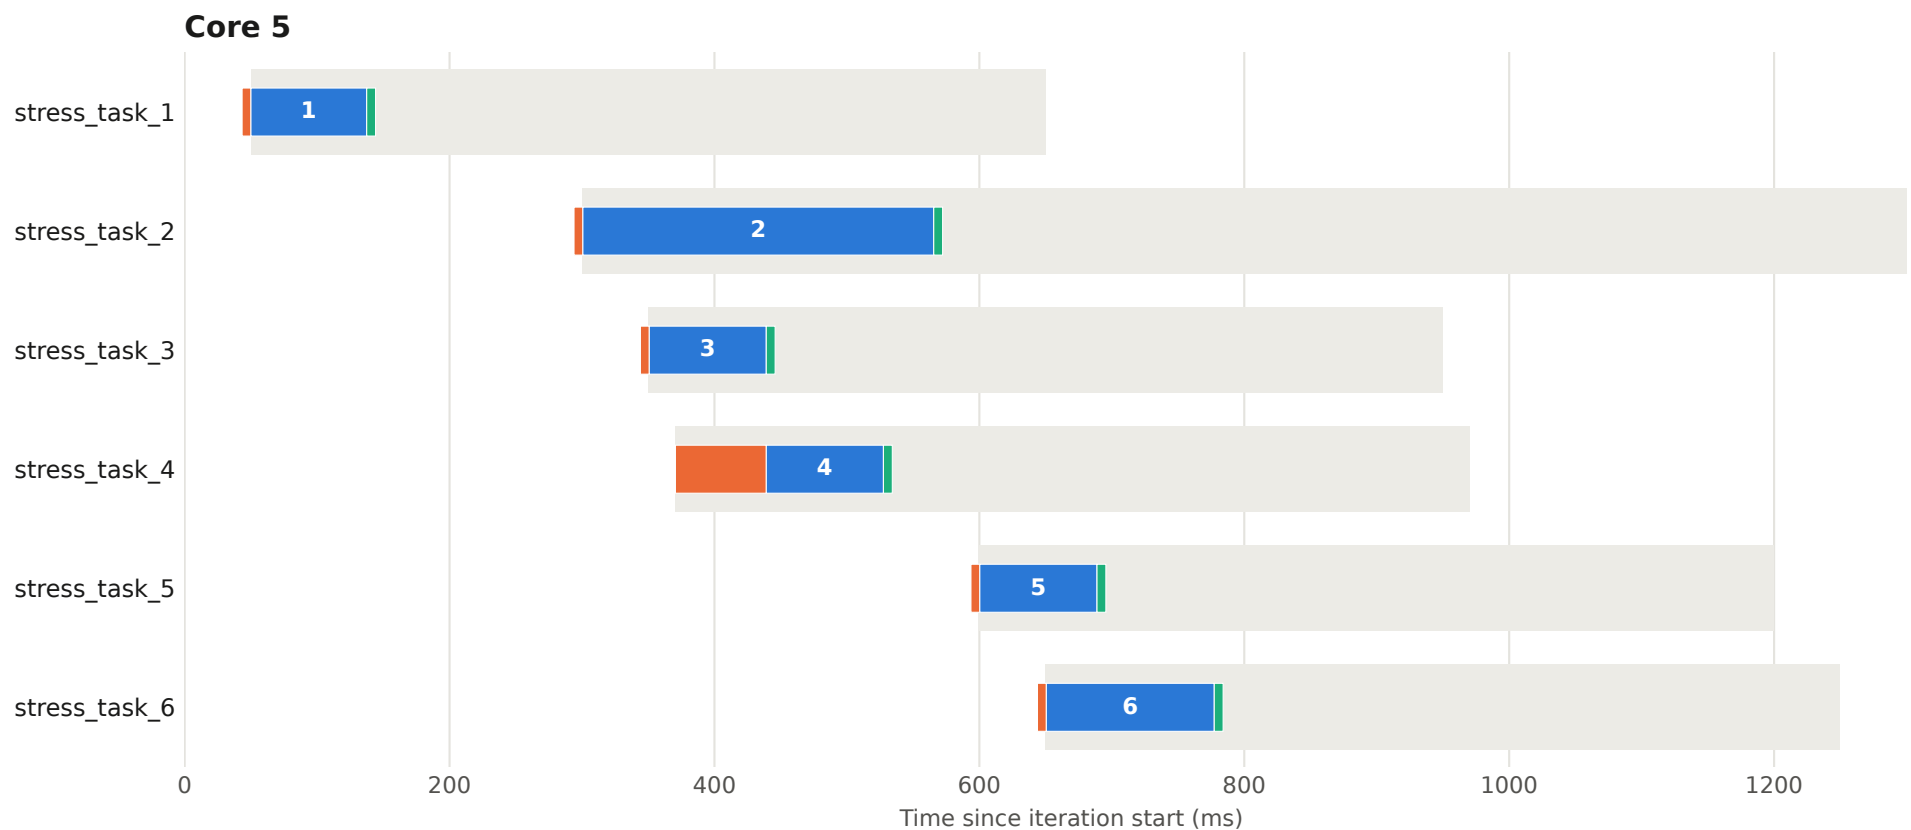


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 10 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

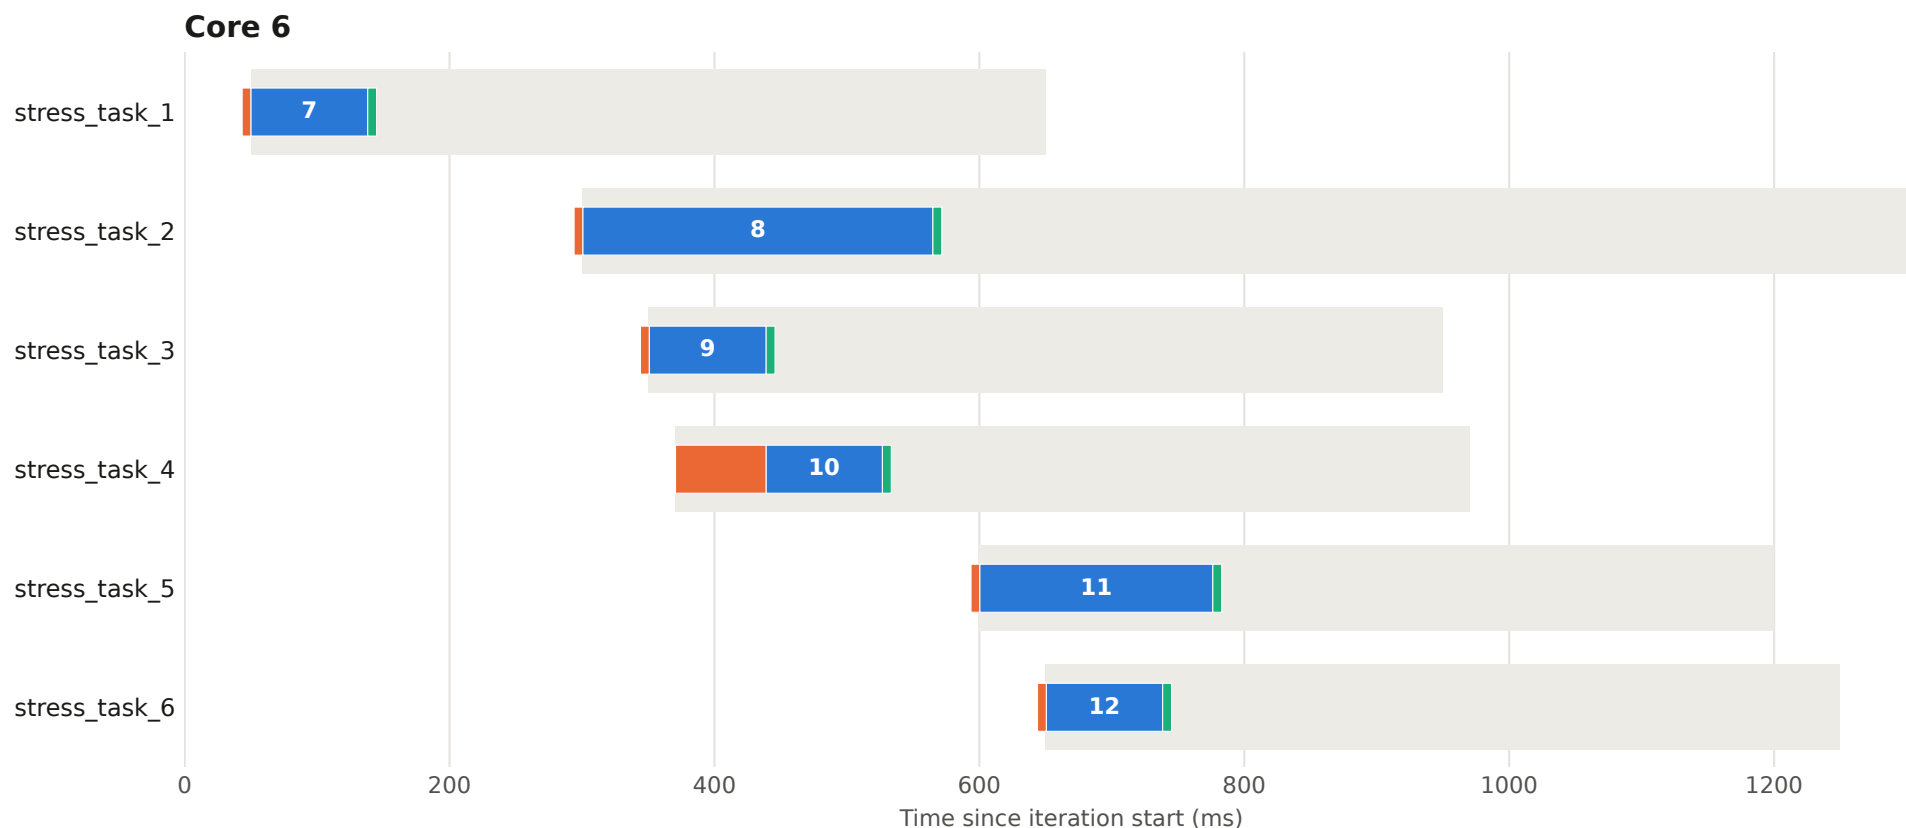


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 10 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

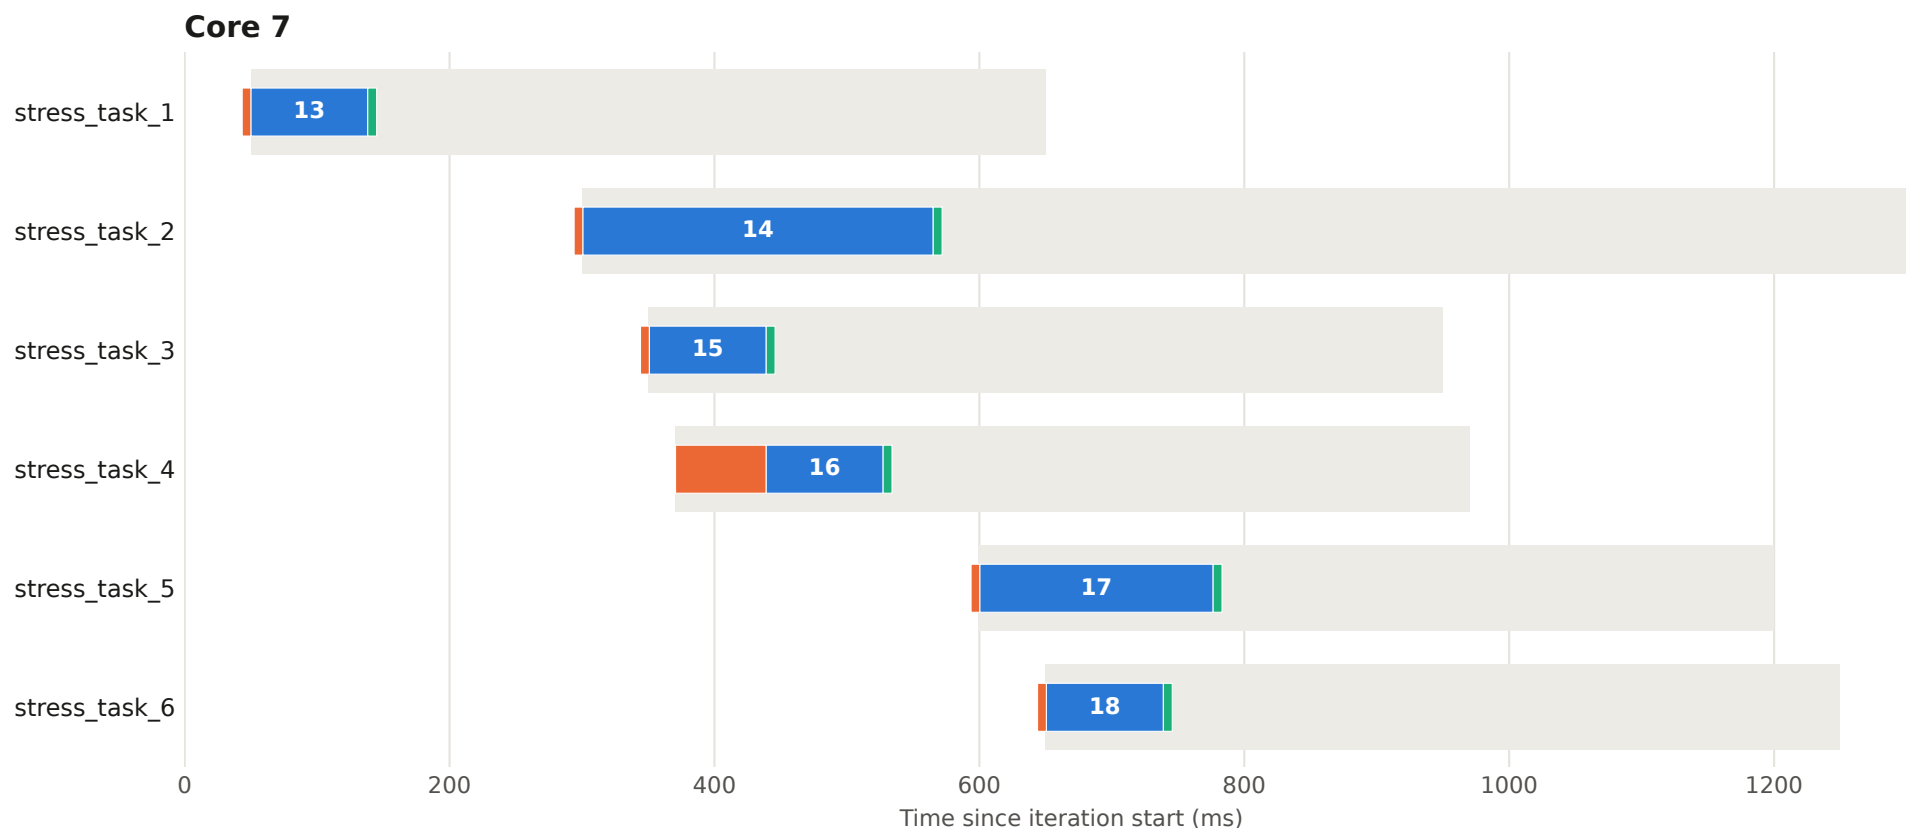


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 11 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

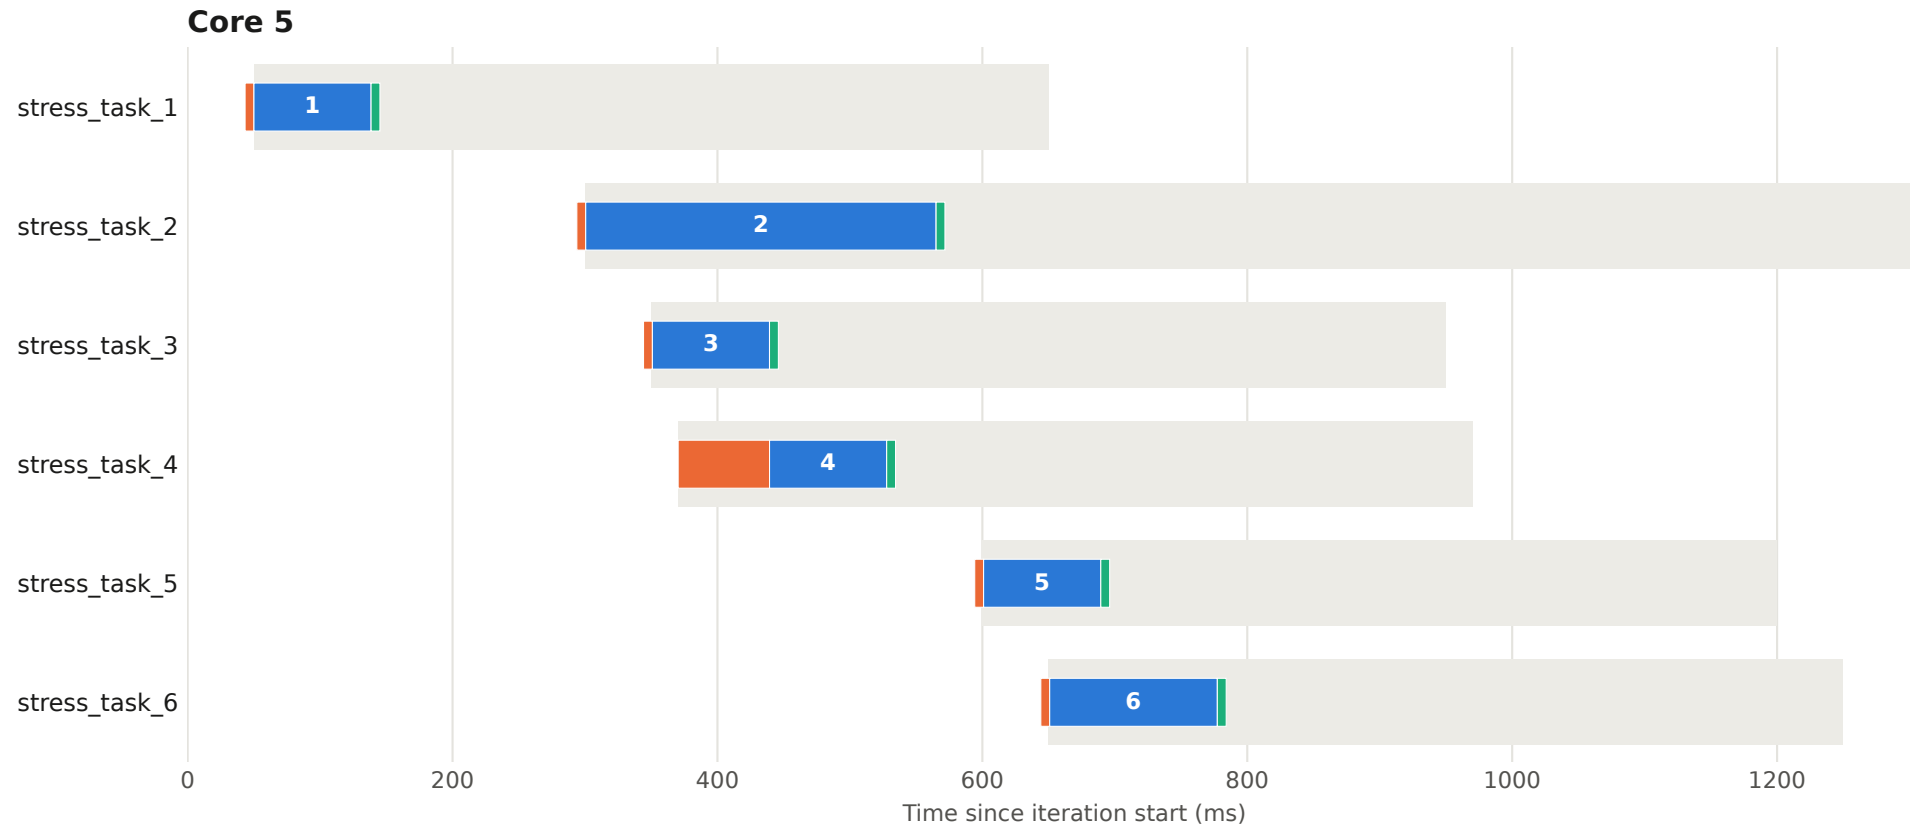


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 11 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

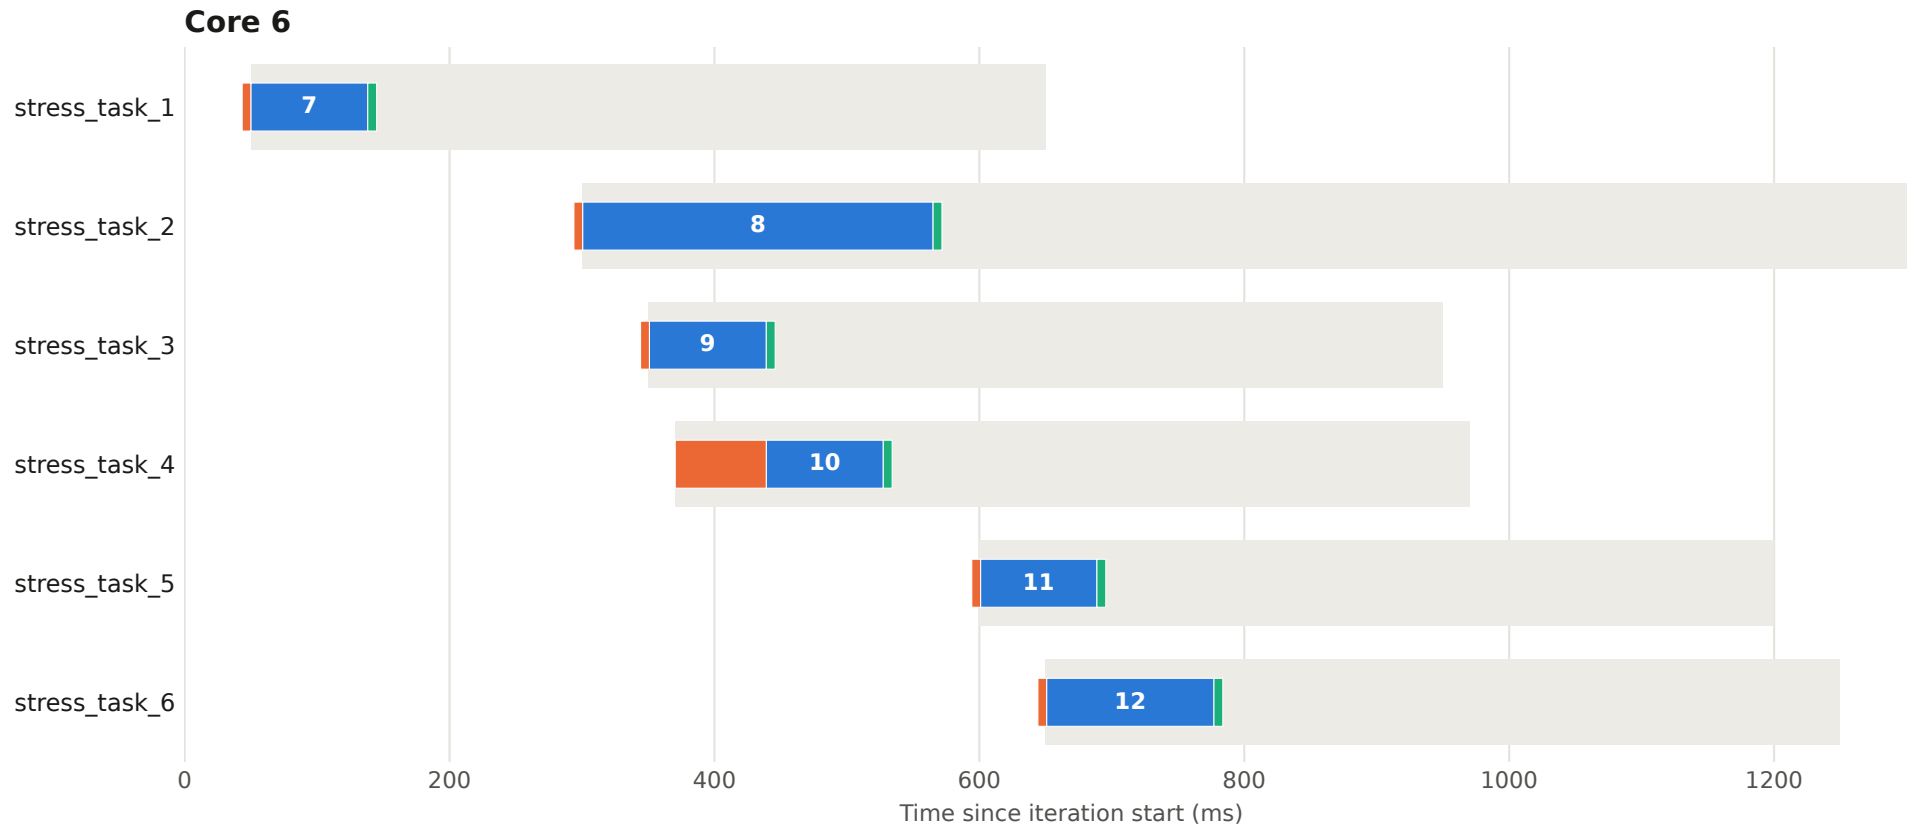


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 11 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

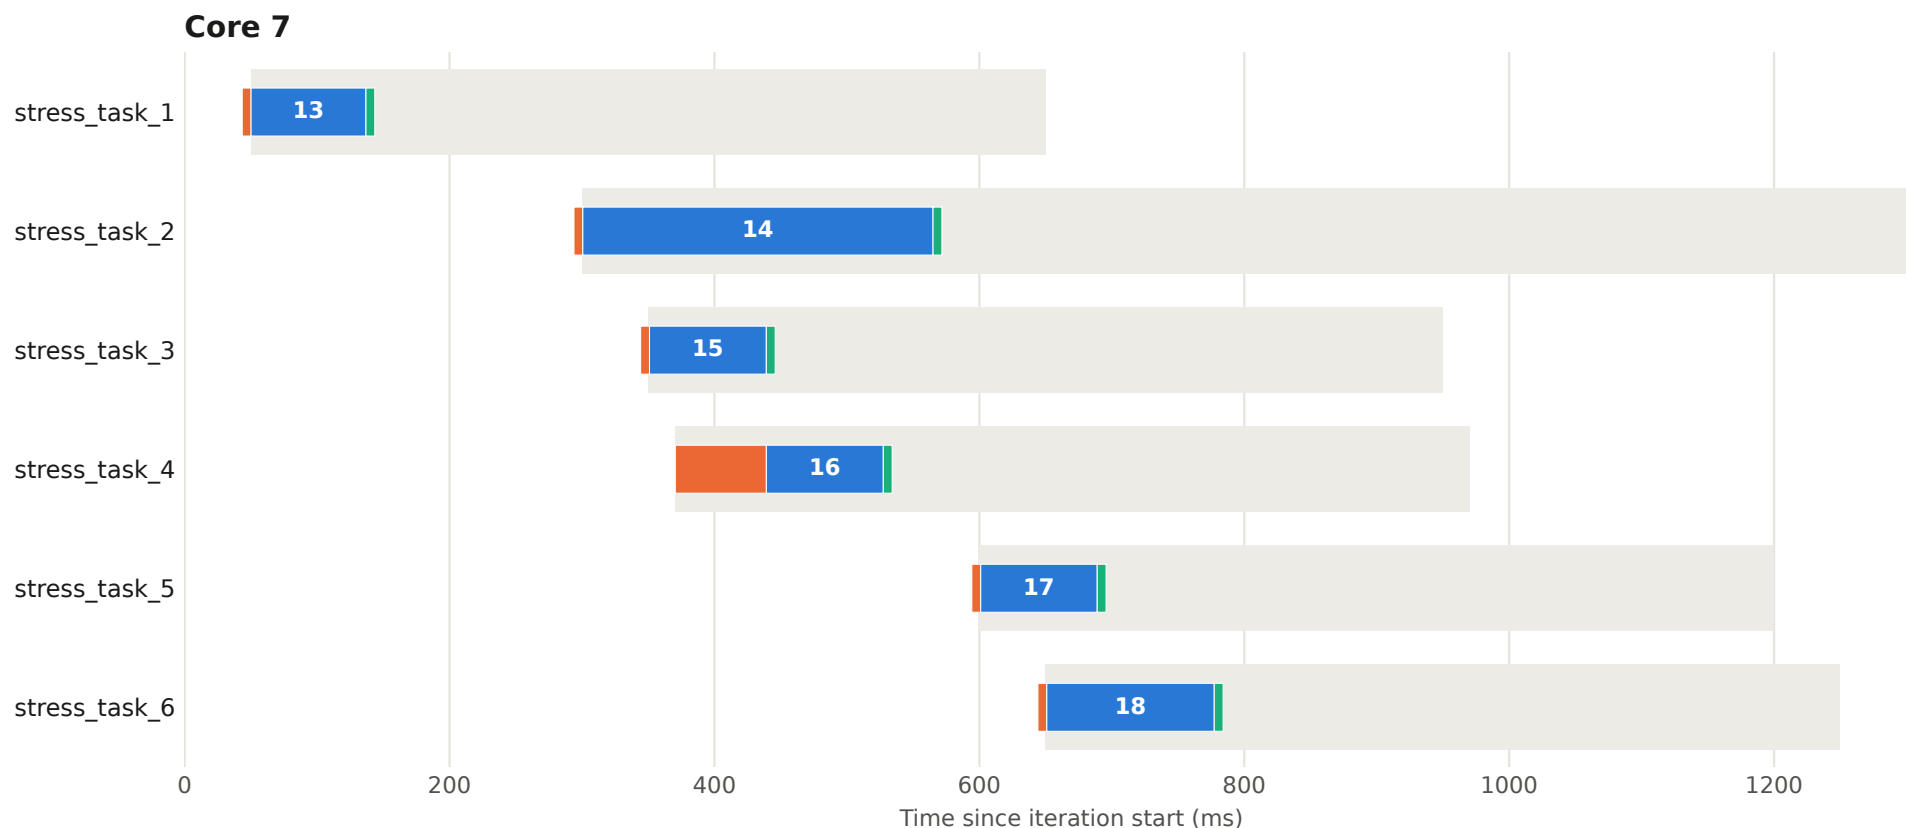


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 12 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

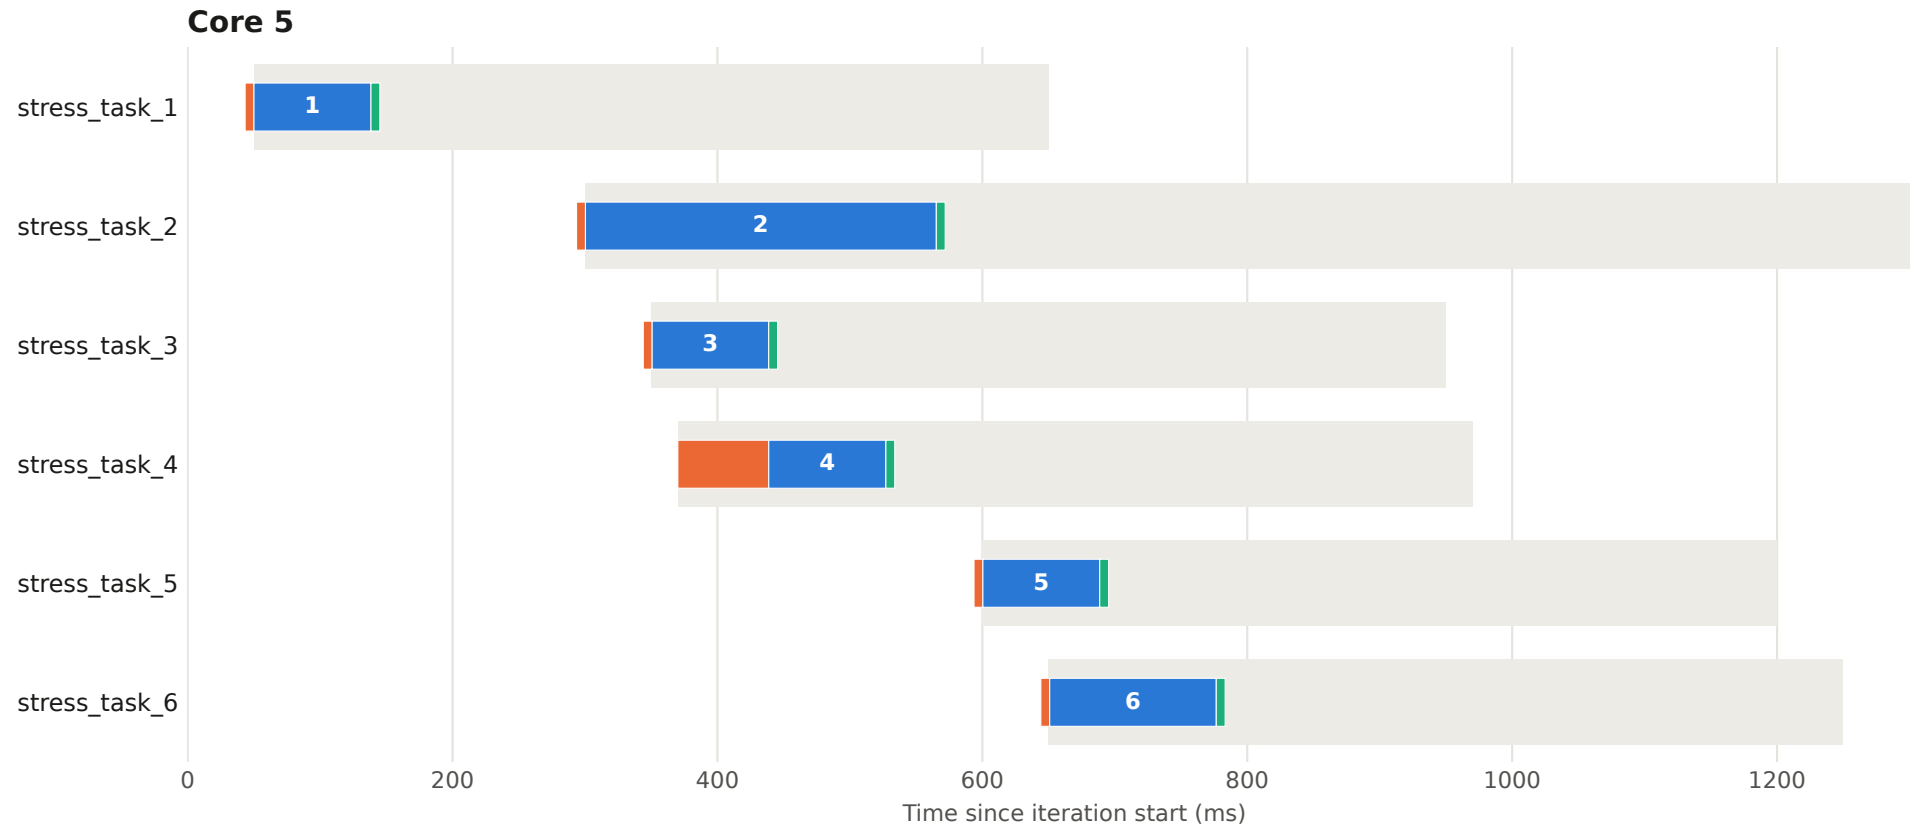


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 12 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

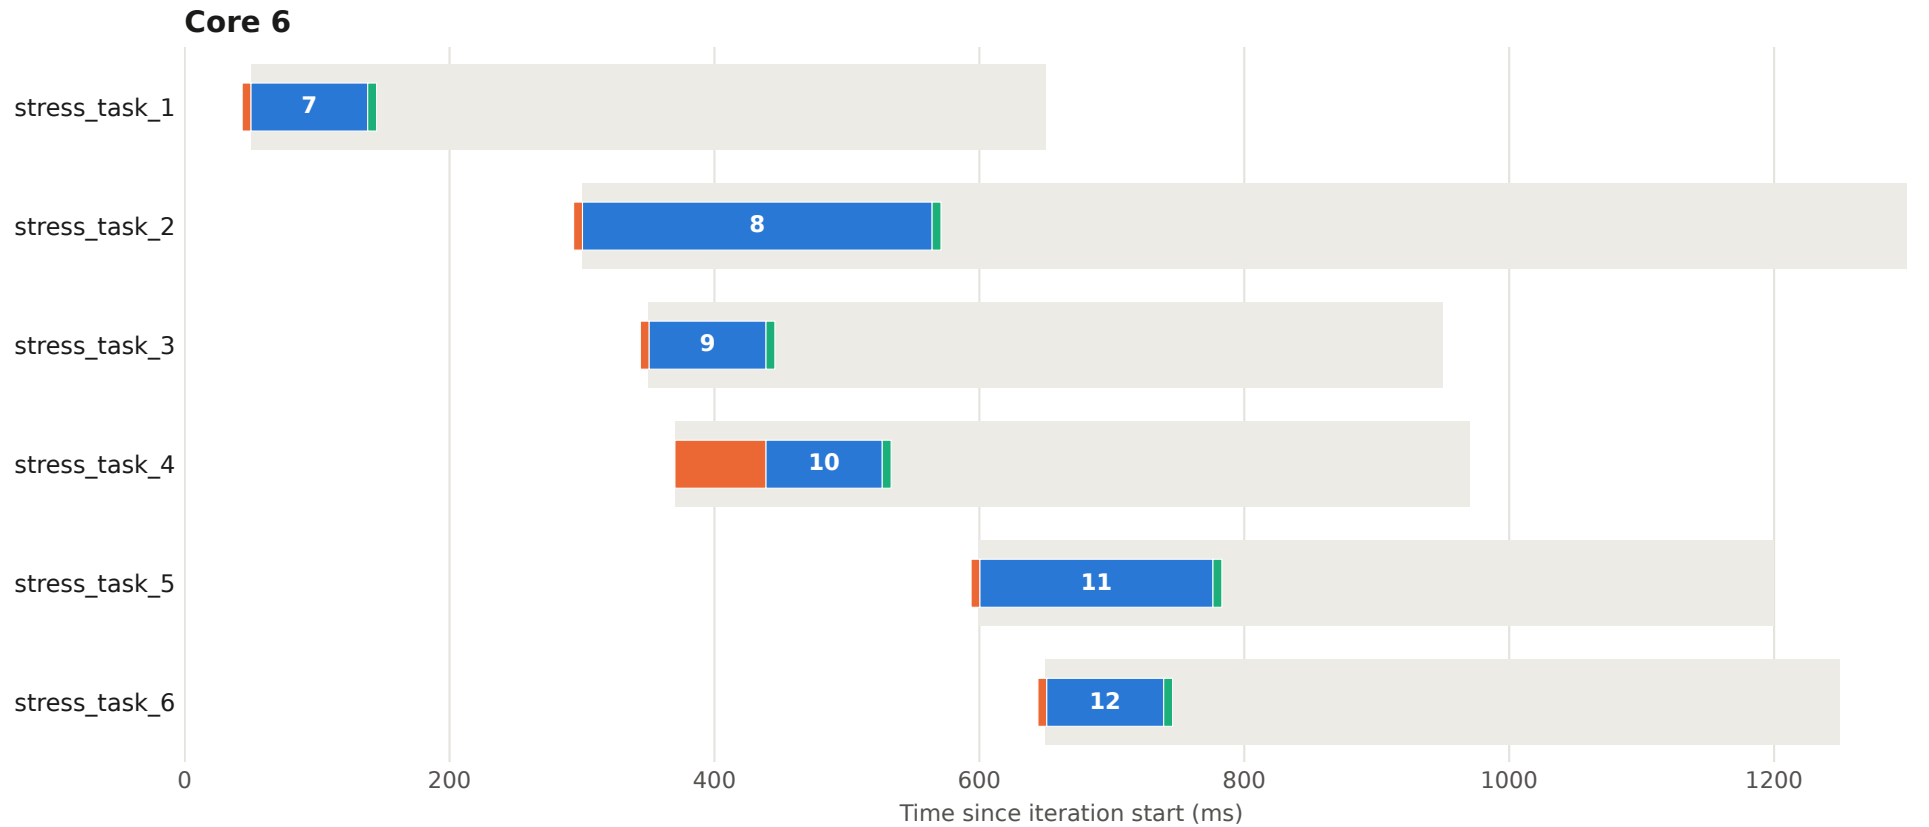


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 12 - core 7

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

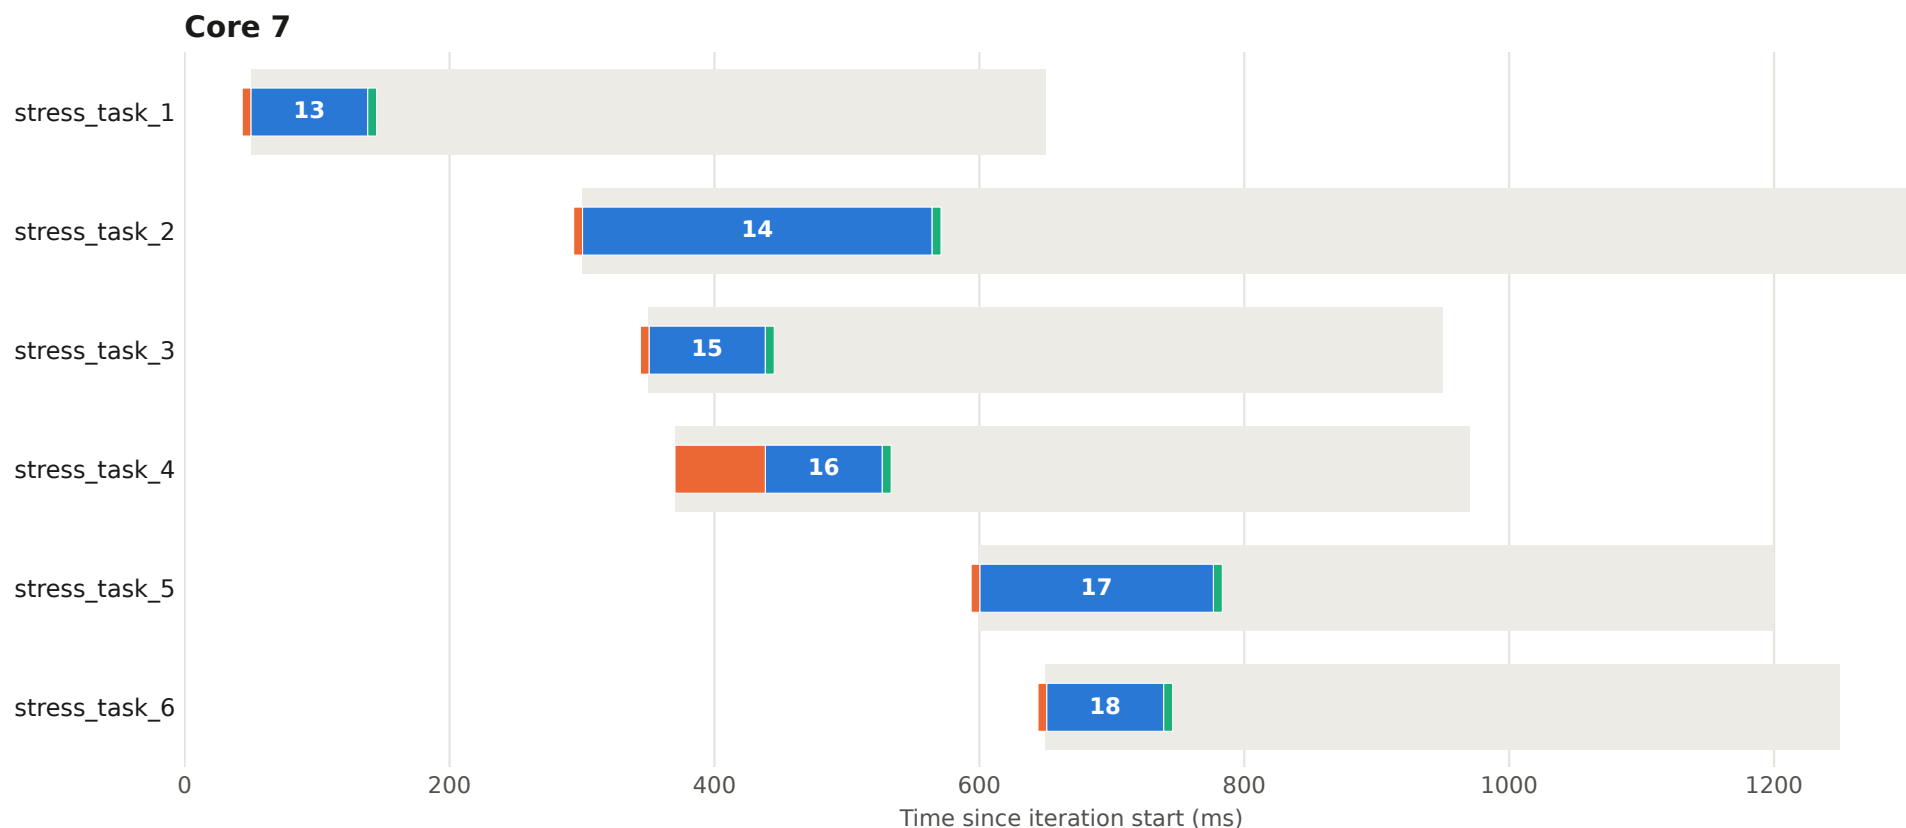

Execution plan - iteration 13 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

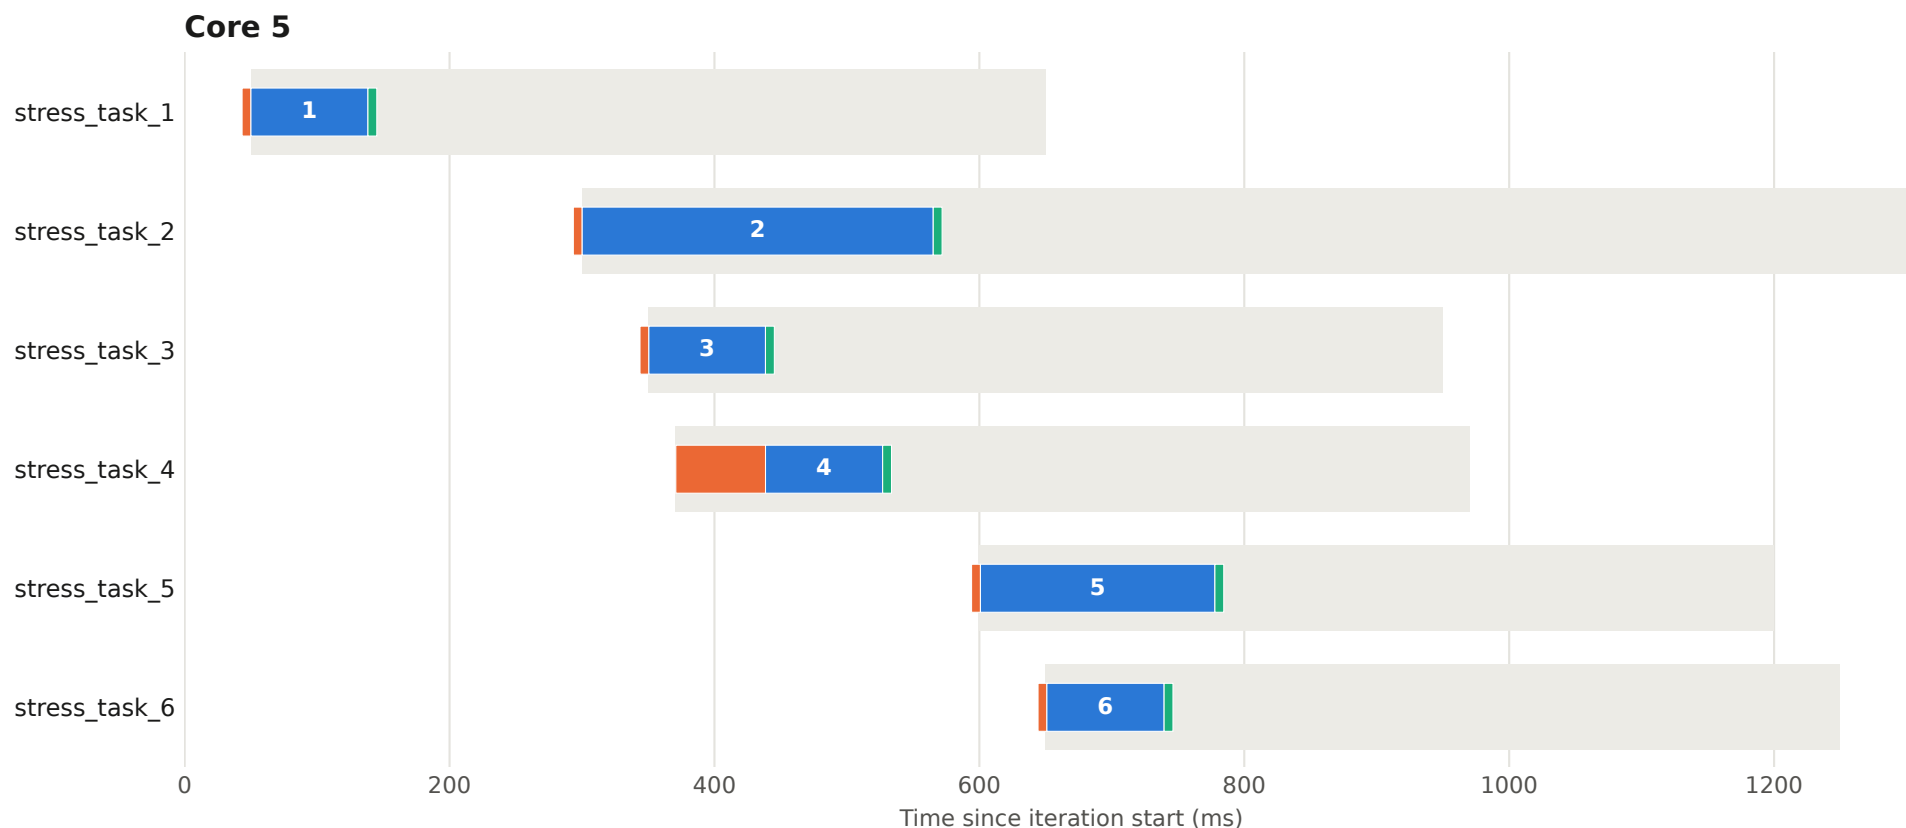


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 13 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

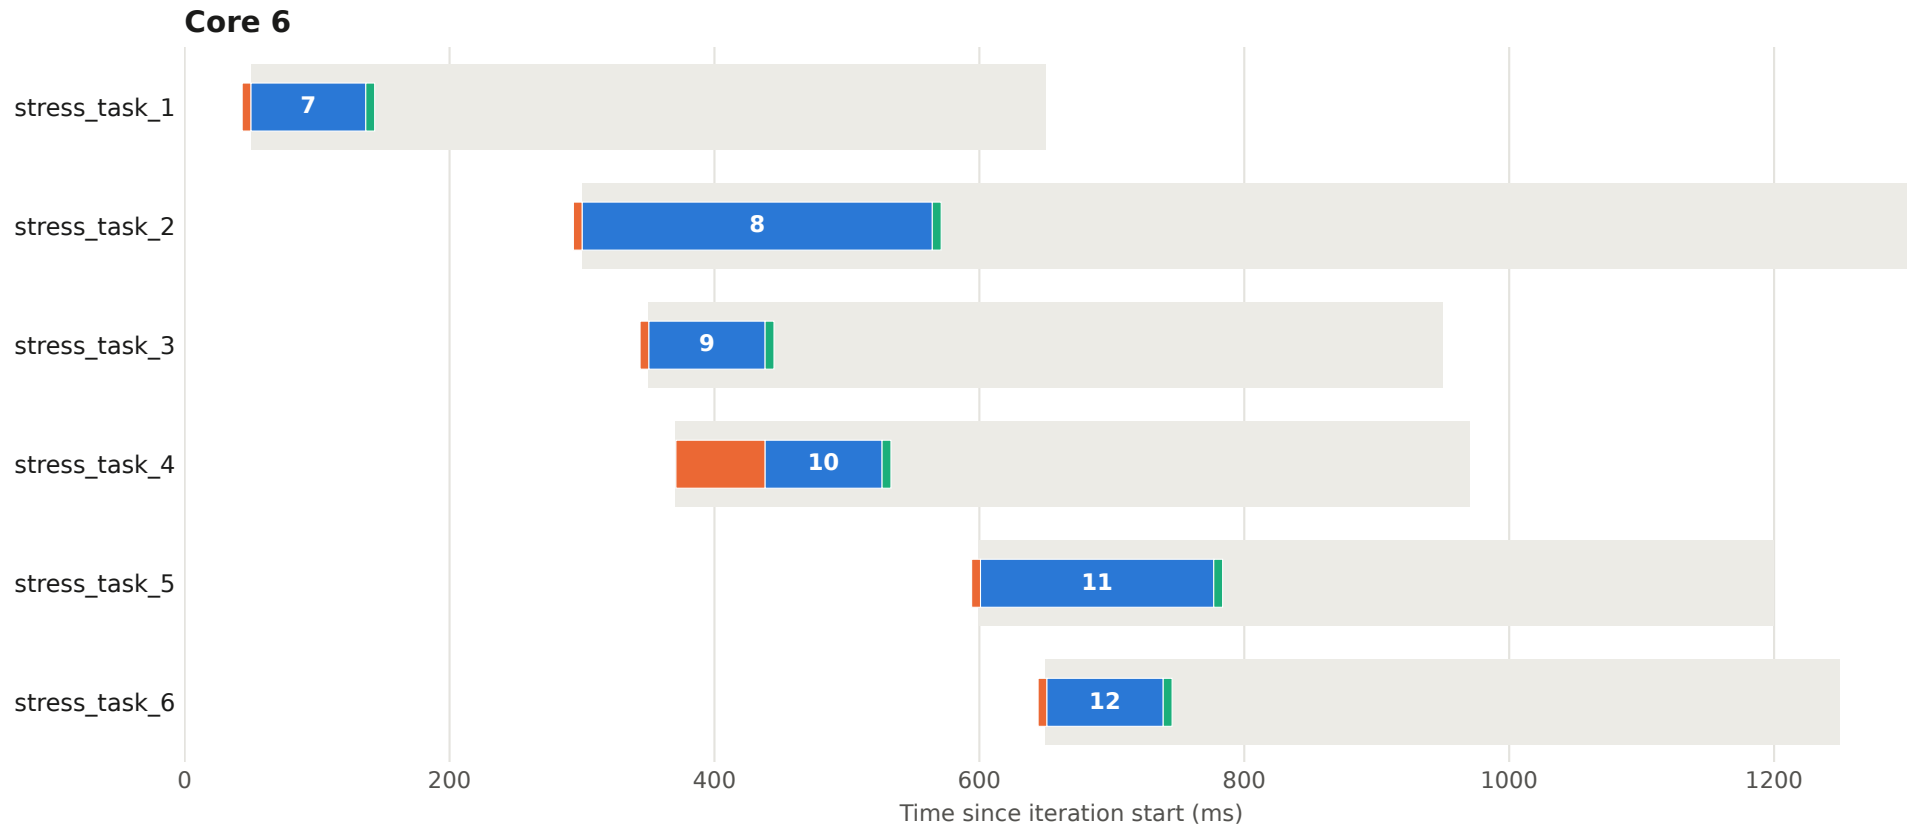


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 13 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

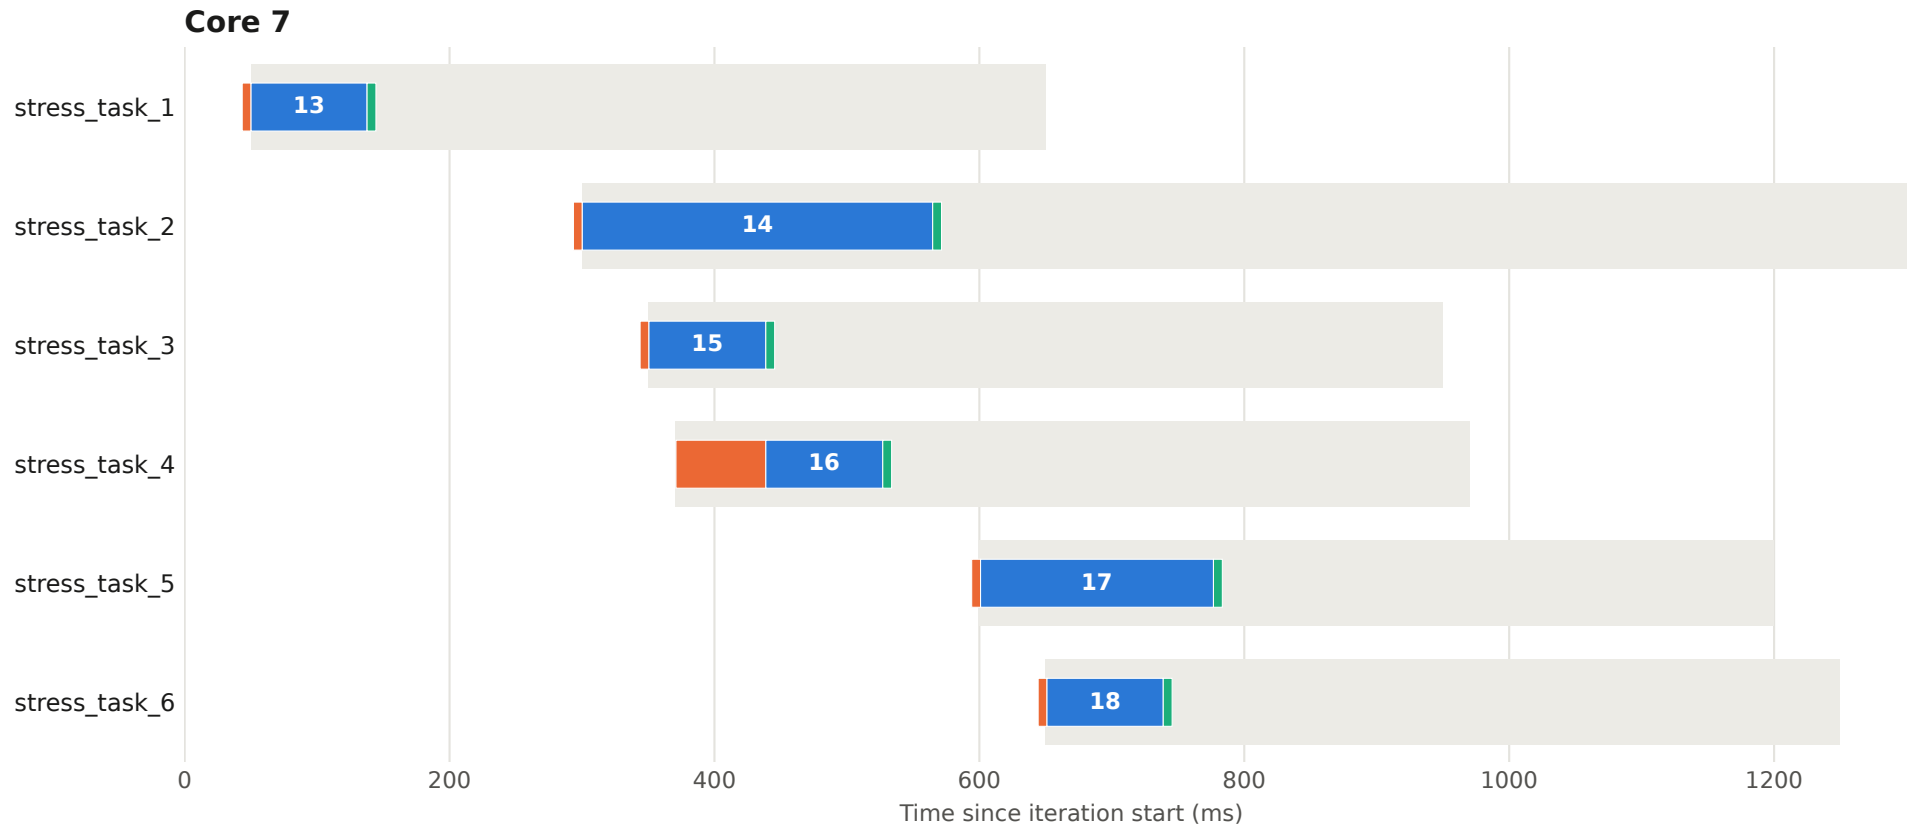


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 14 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

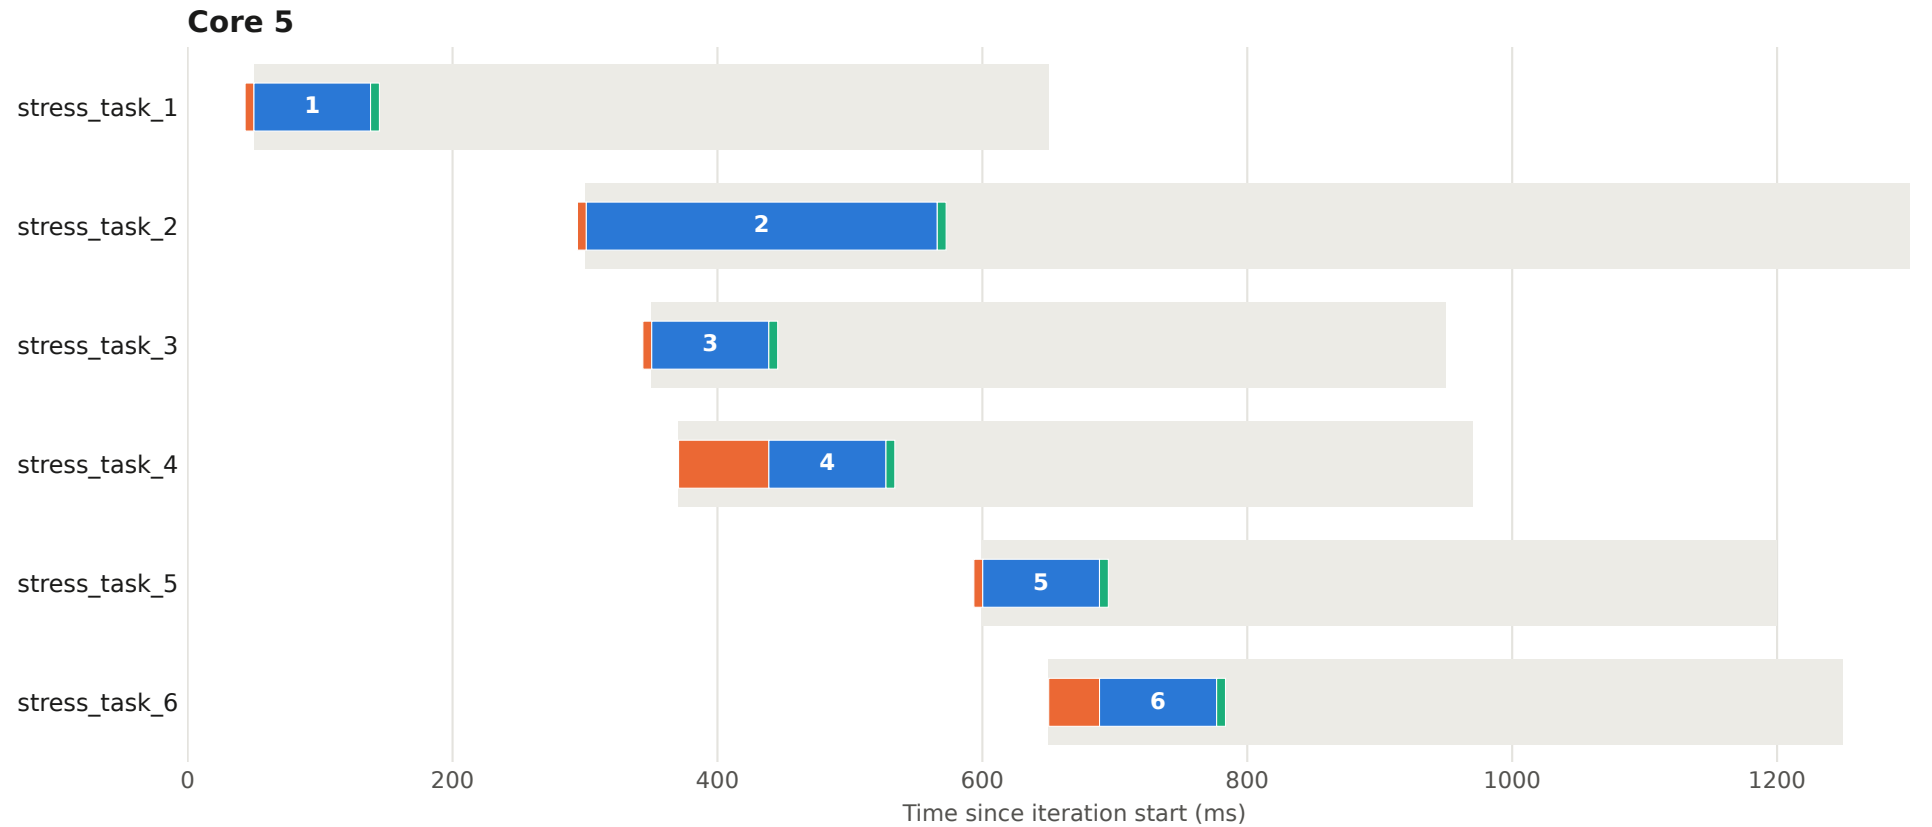


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 14 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

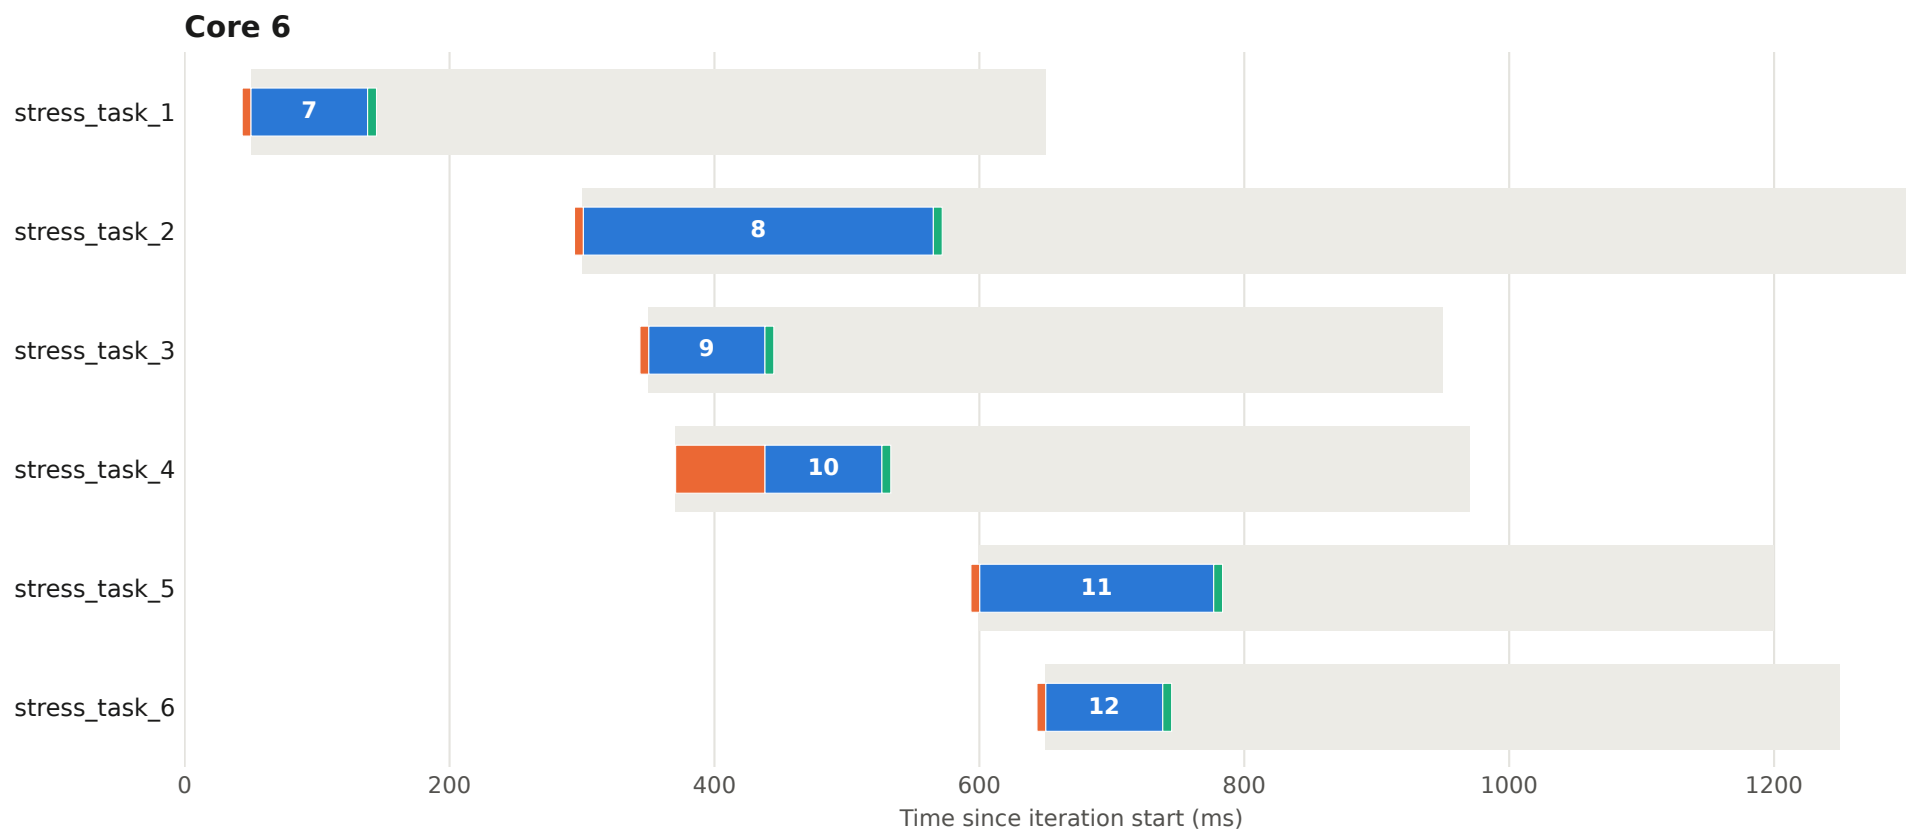


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 14 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

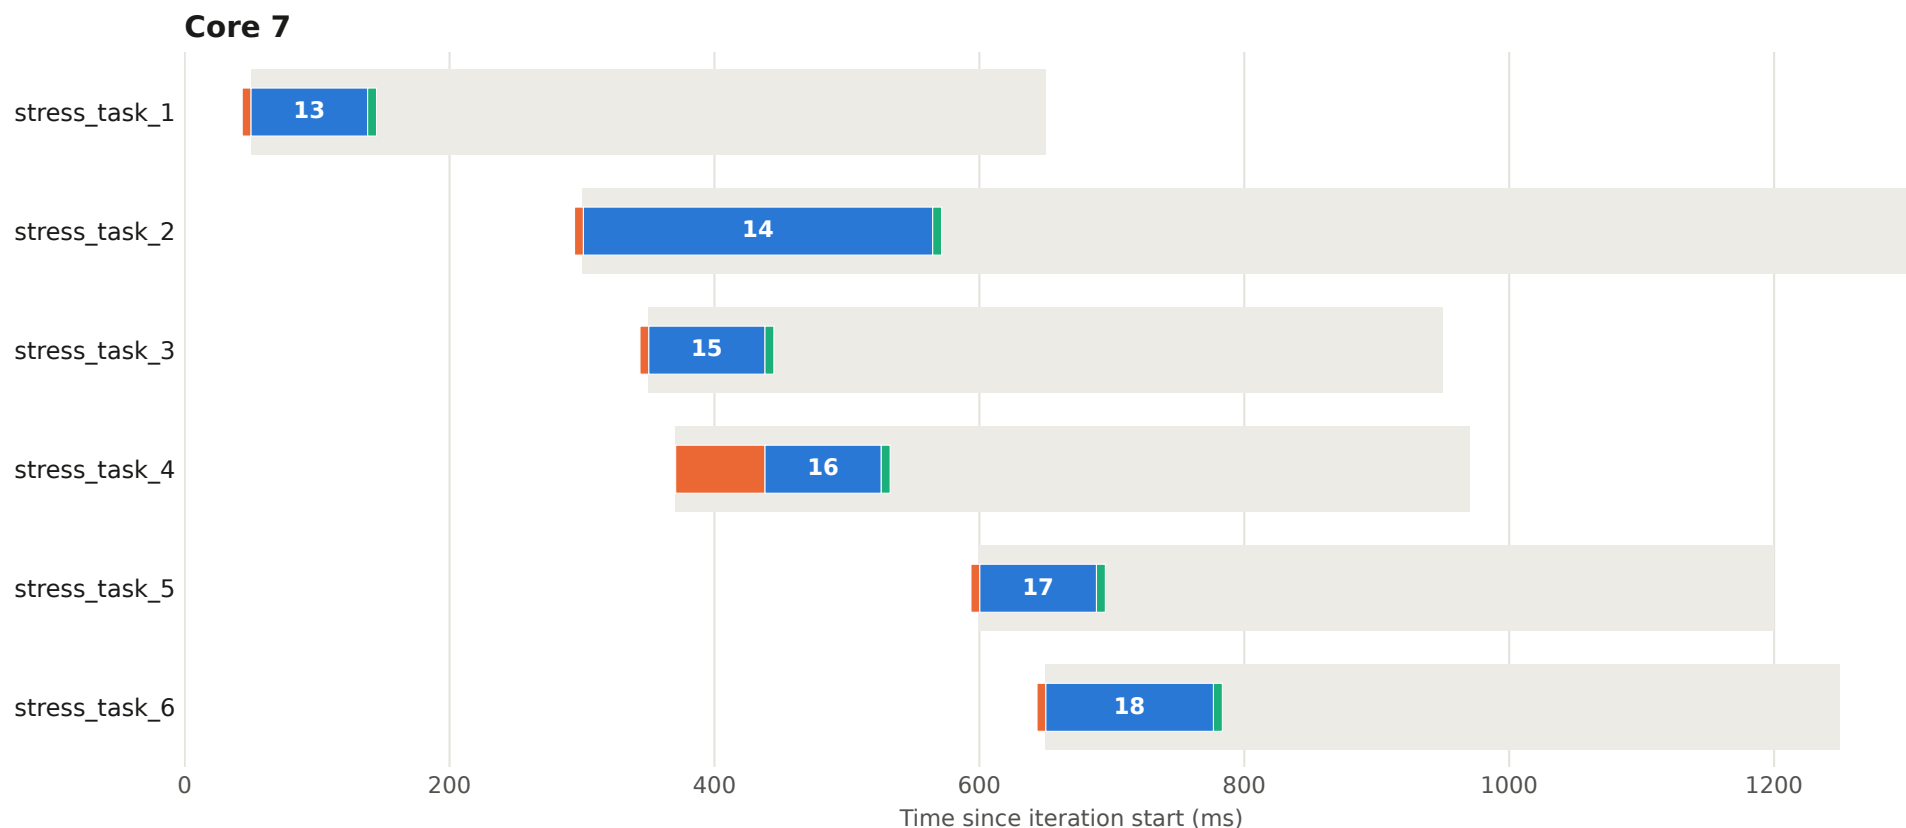


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 15 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

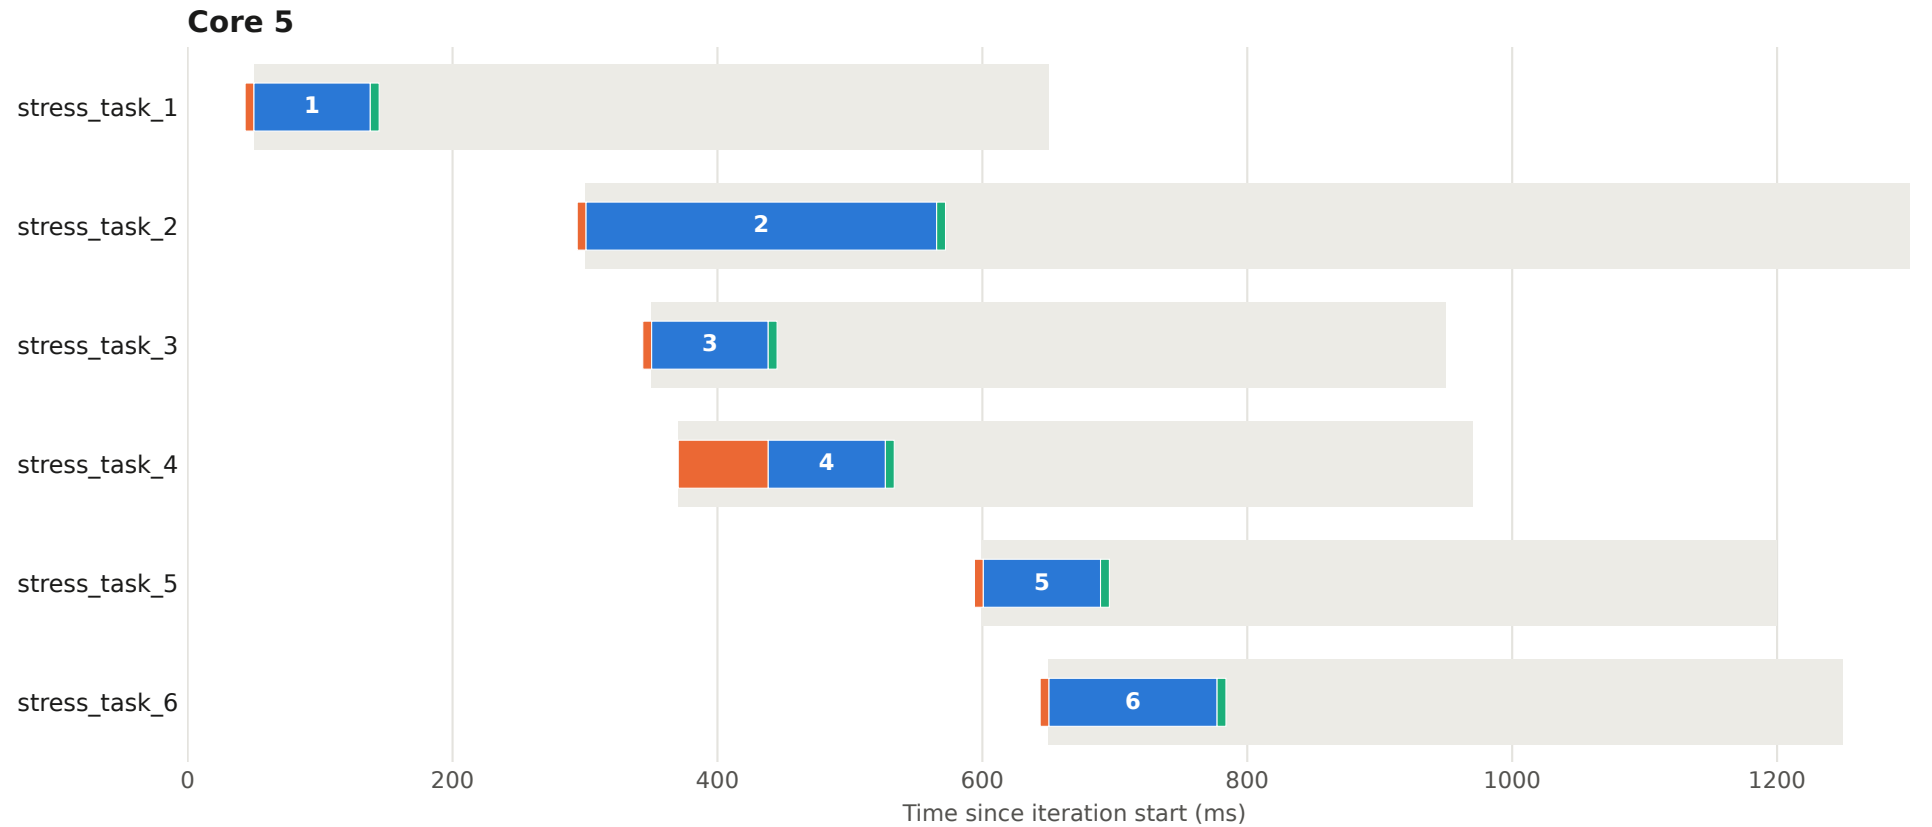


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 15 - core 6

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

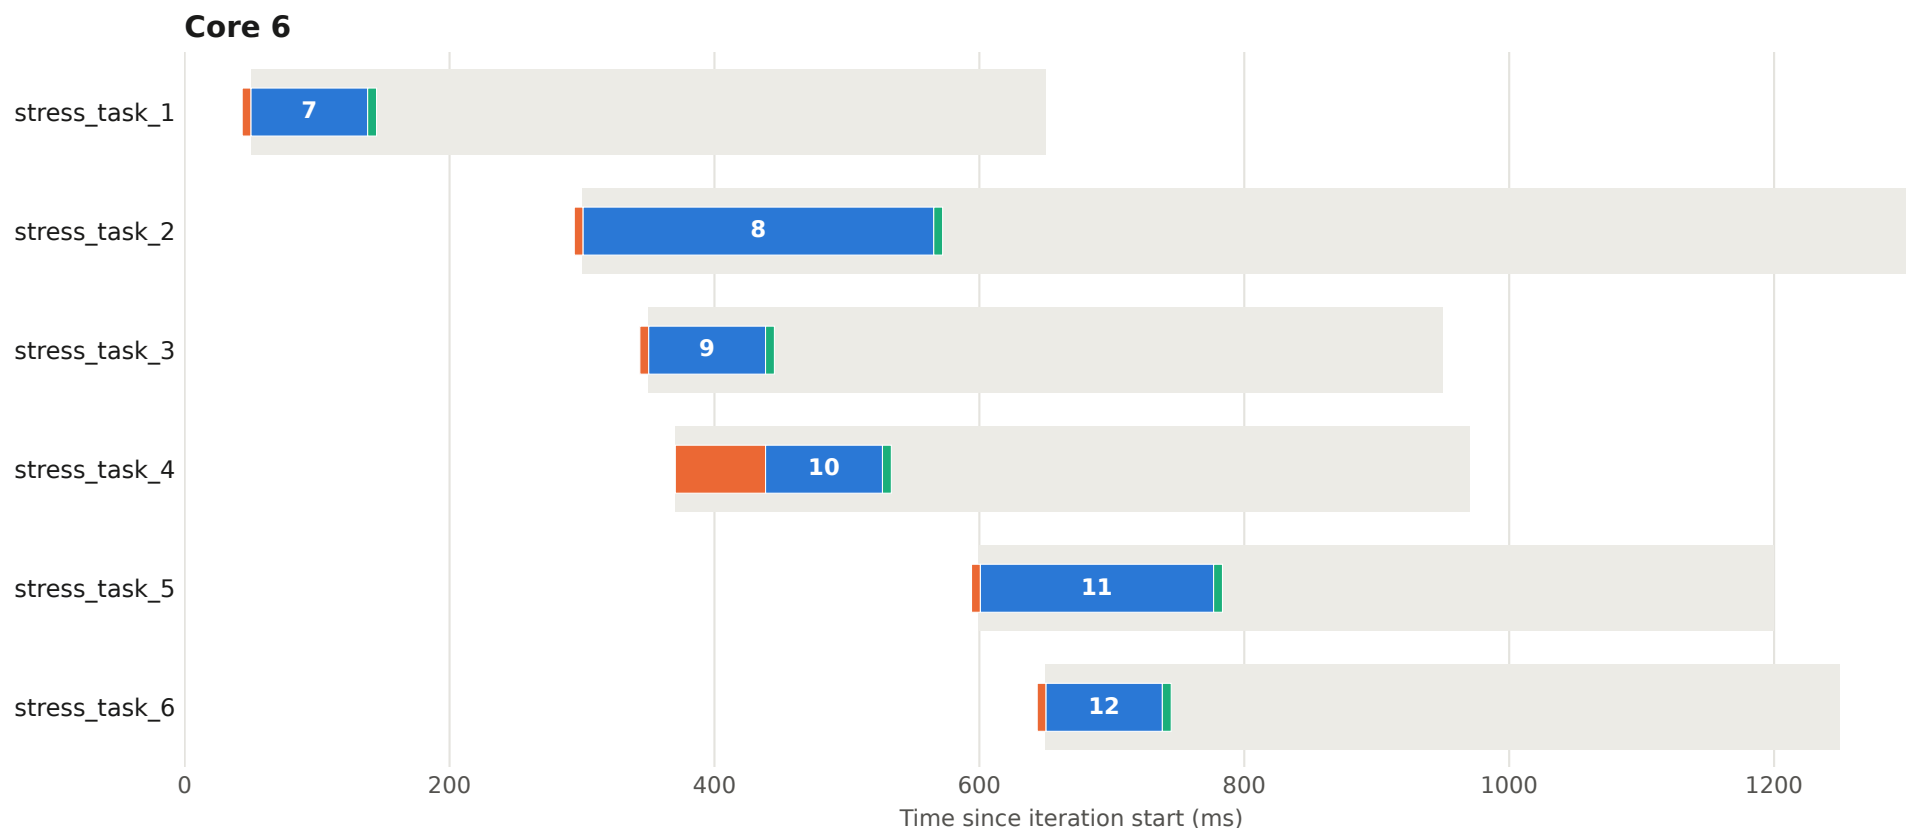

Execution plan - iteration 15 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

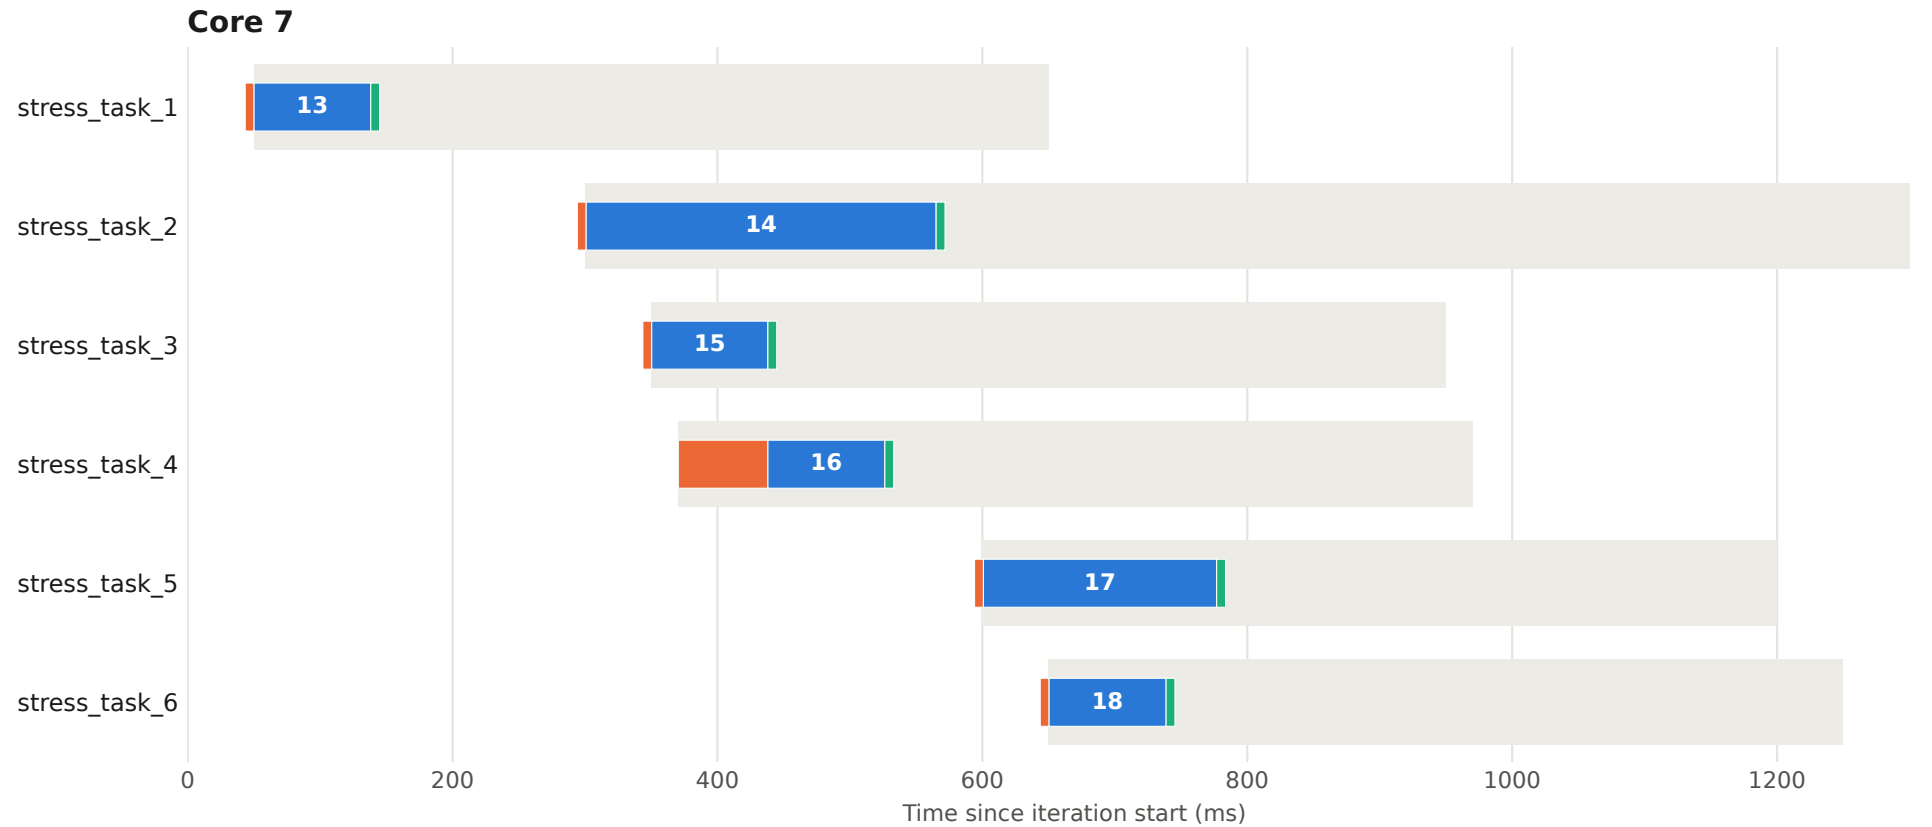


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 16 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

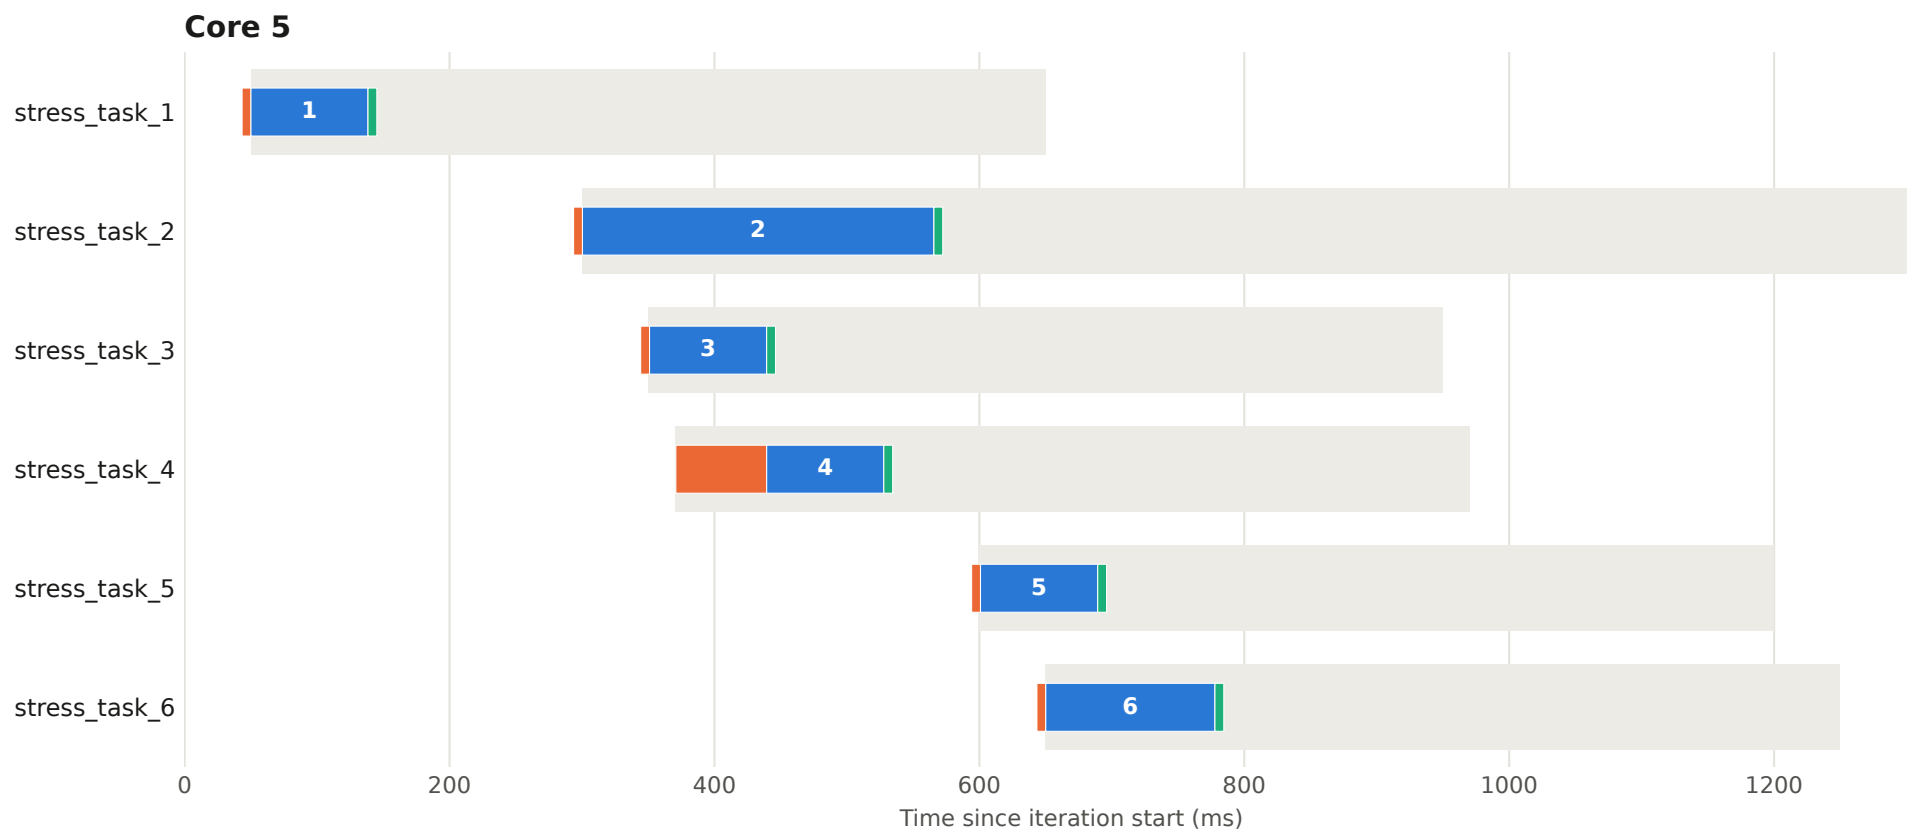


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 16 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

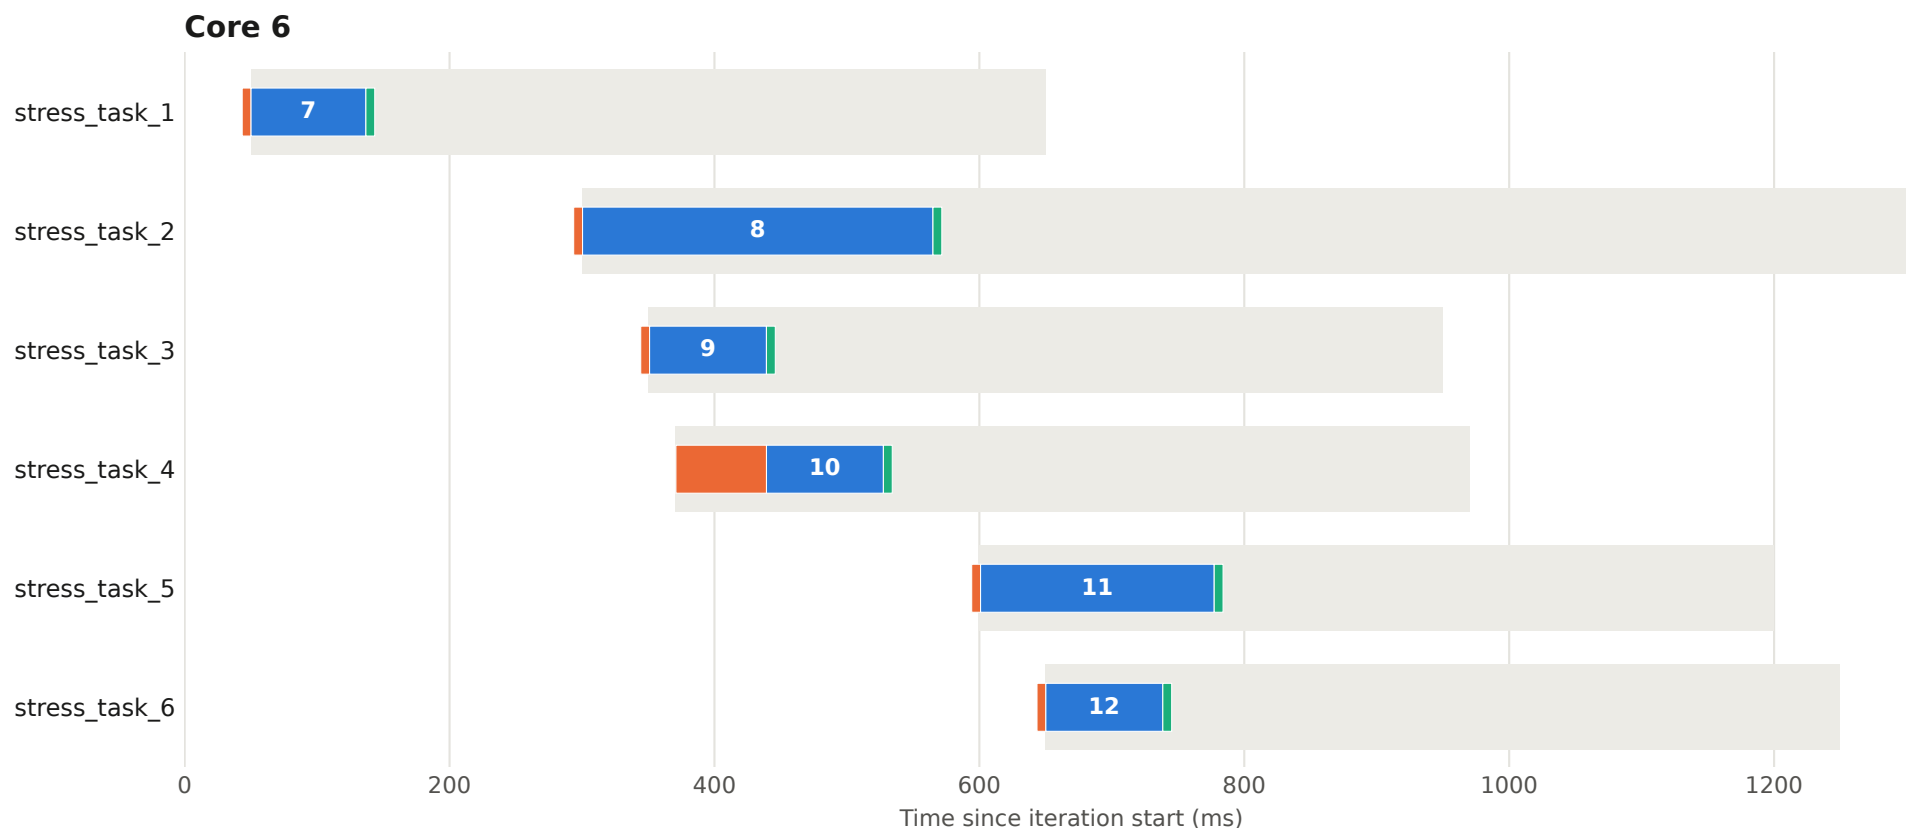


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 16 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

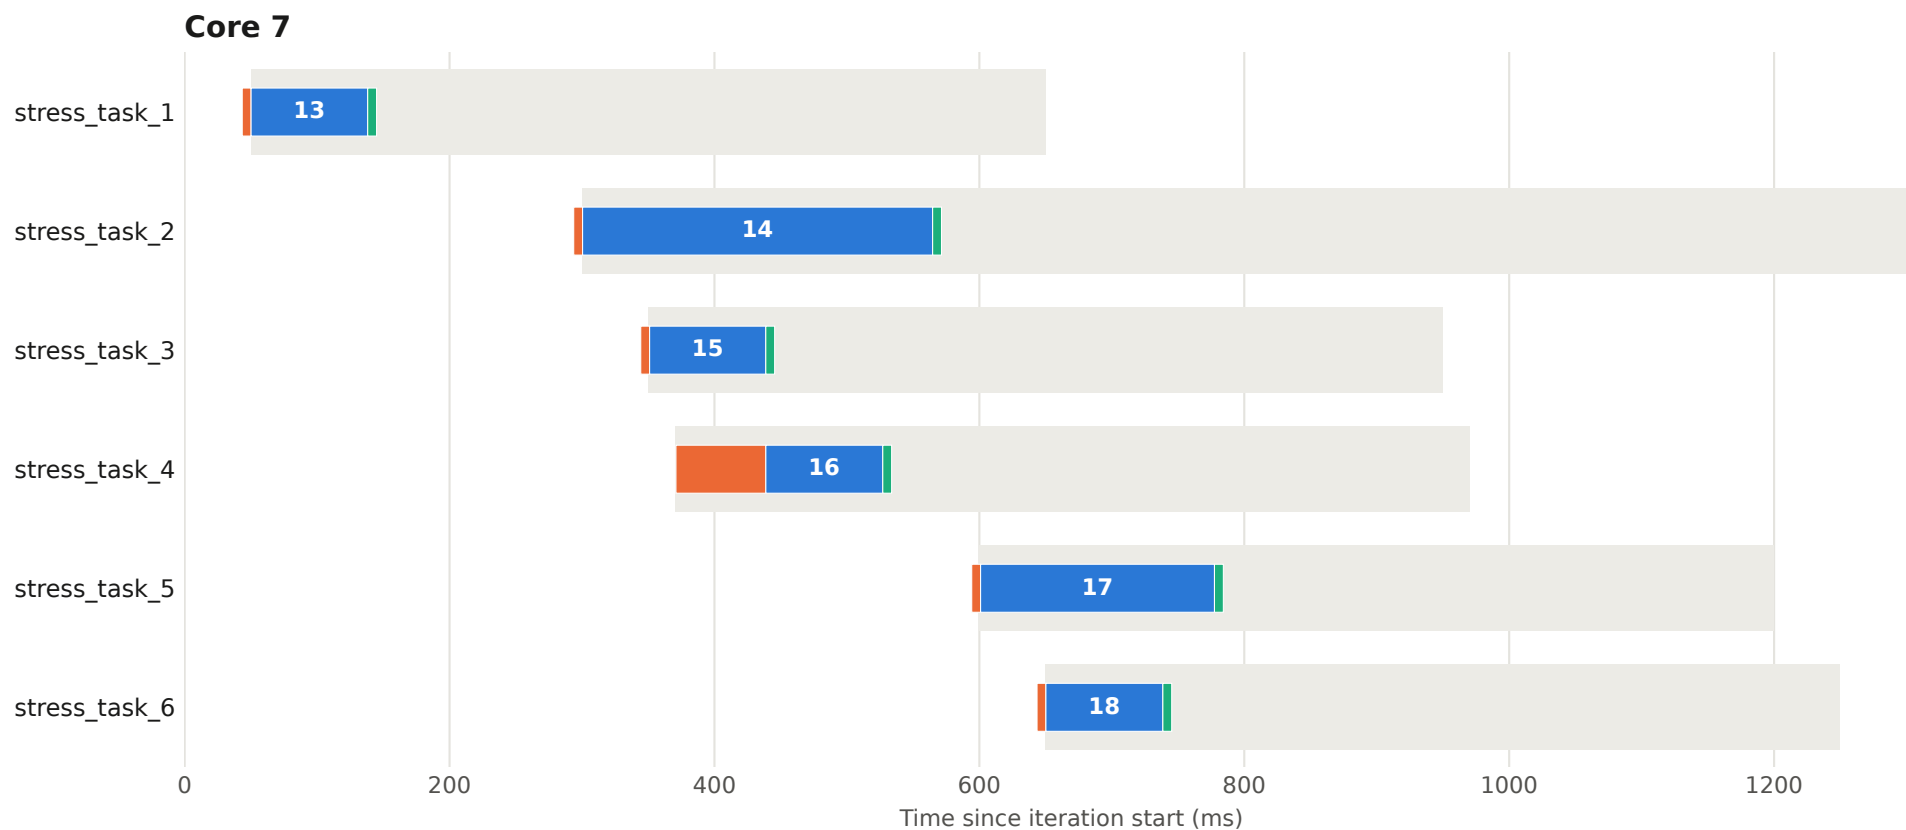


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 17 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

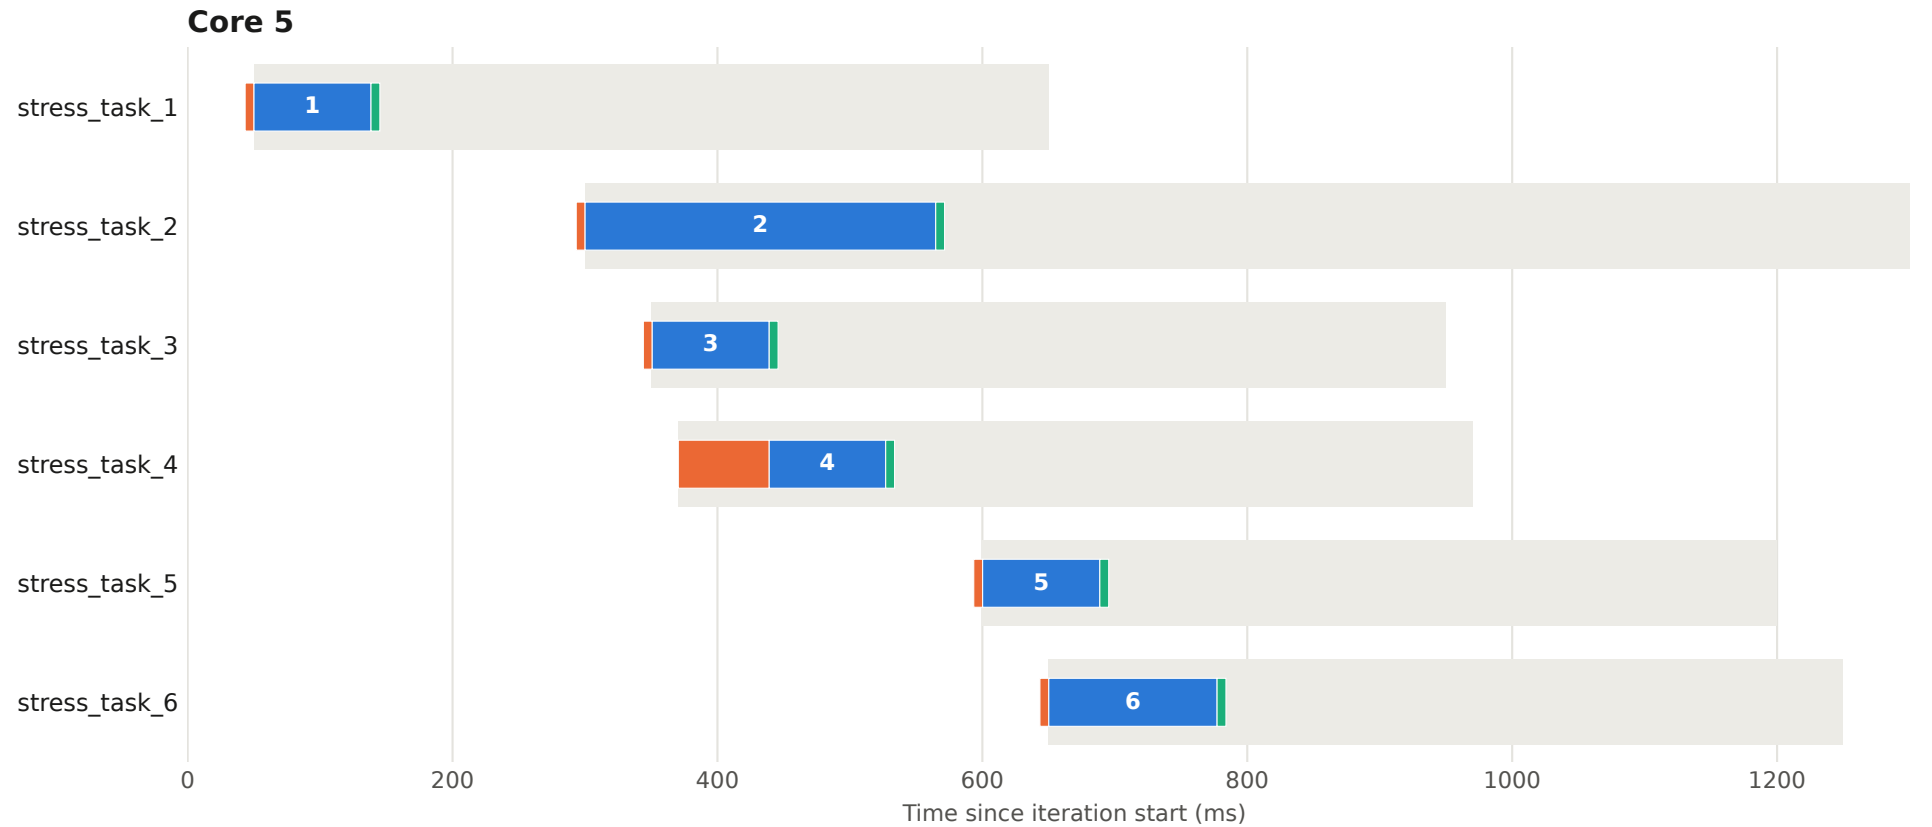


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 17 - core 6

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

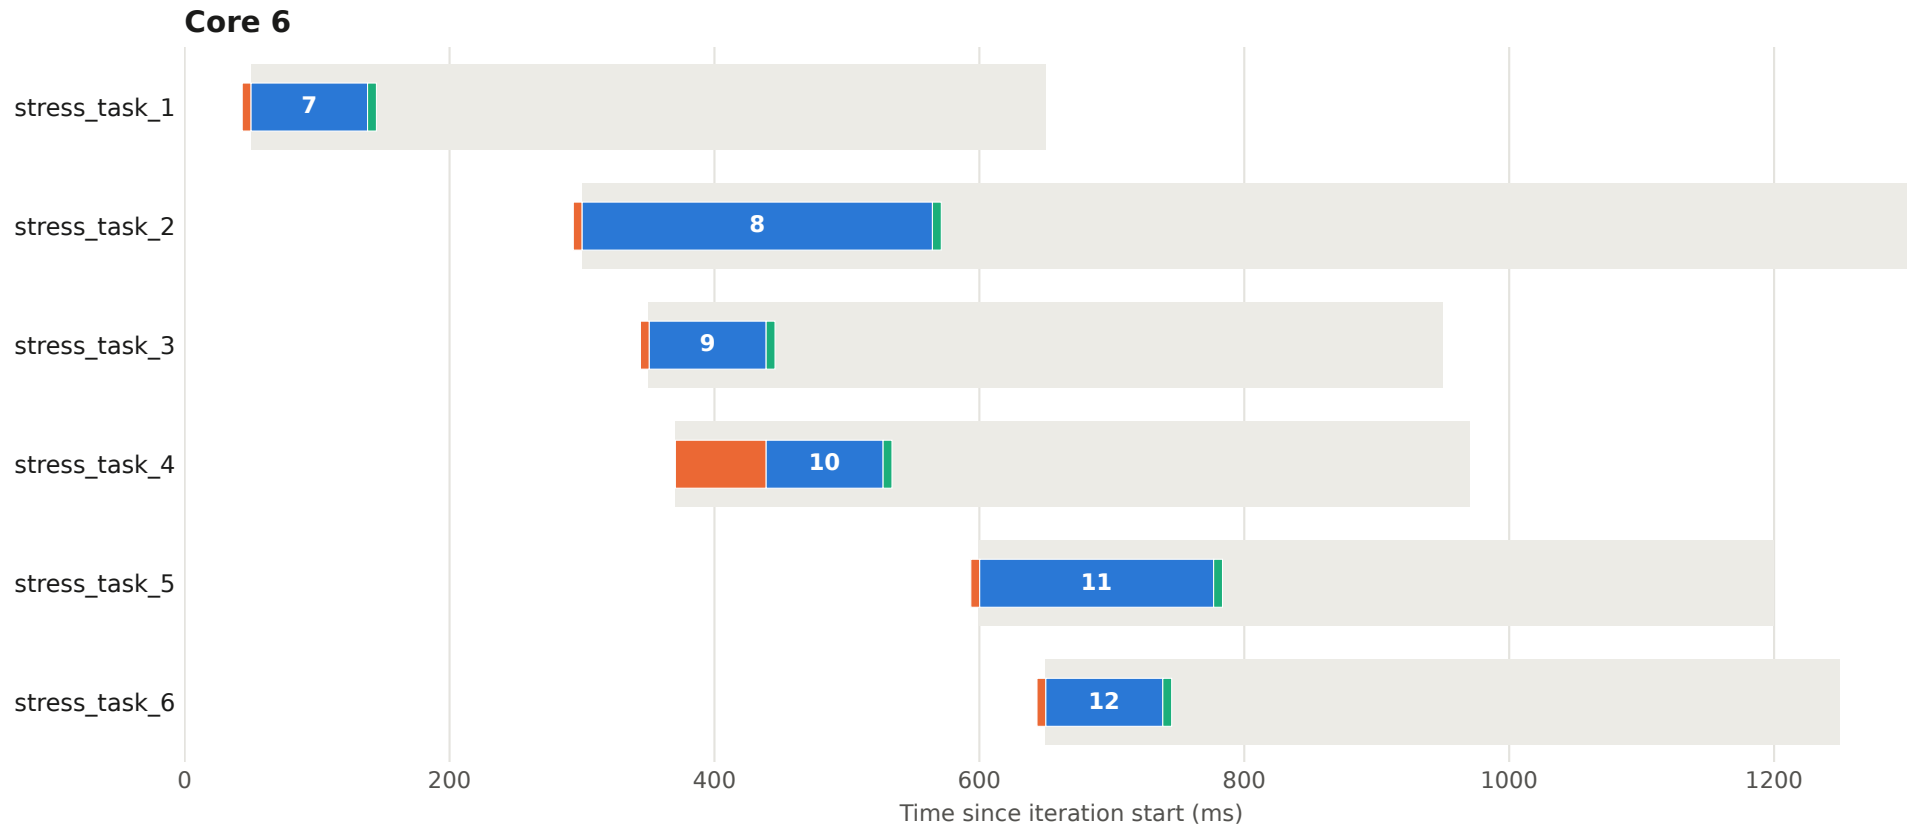

Execution plan - iteration 17 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

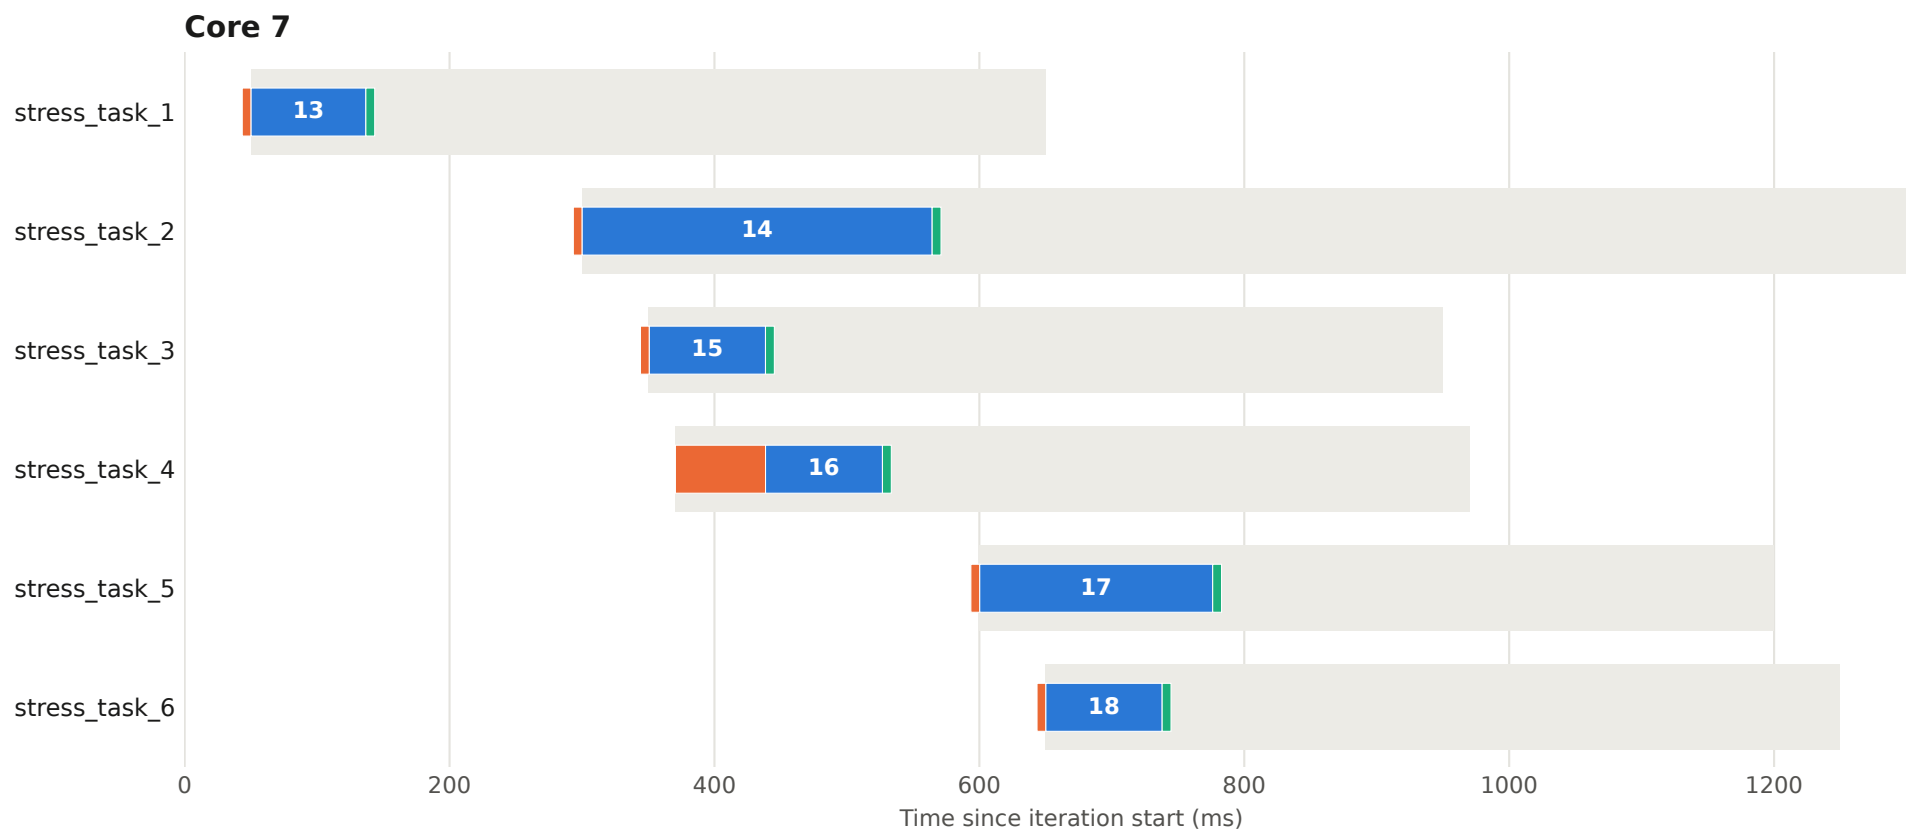


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 18 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

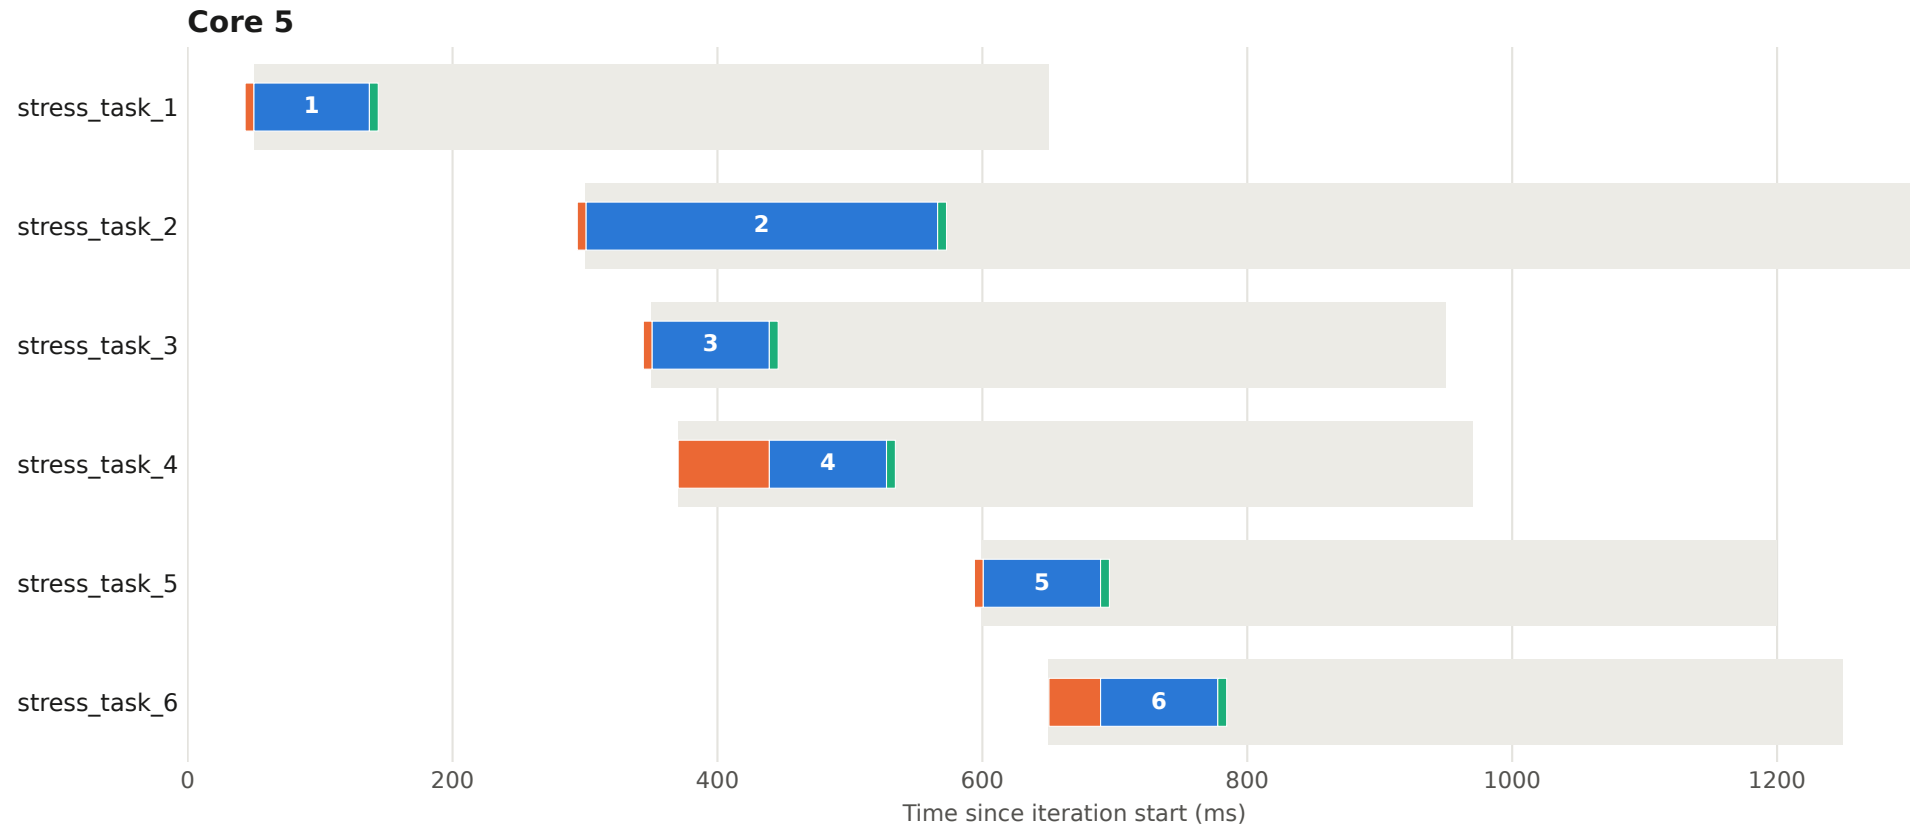


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 18 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

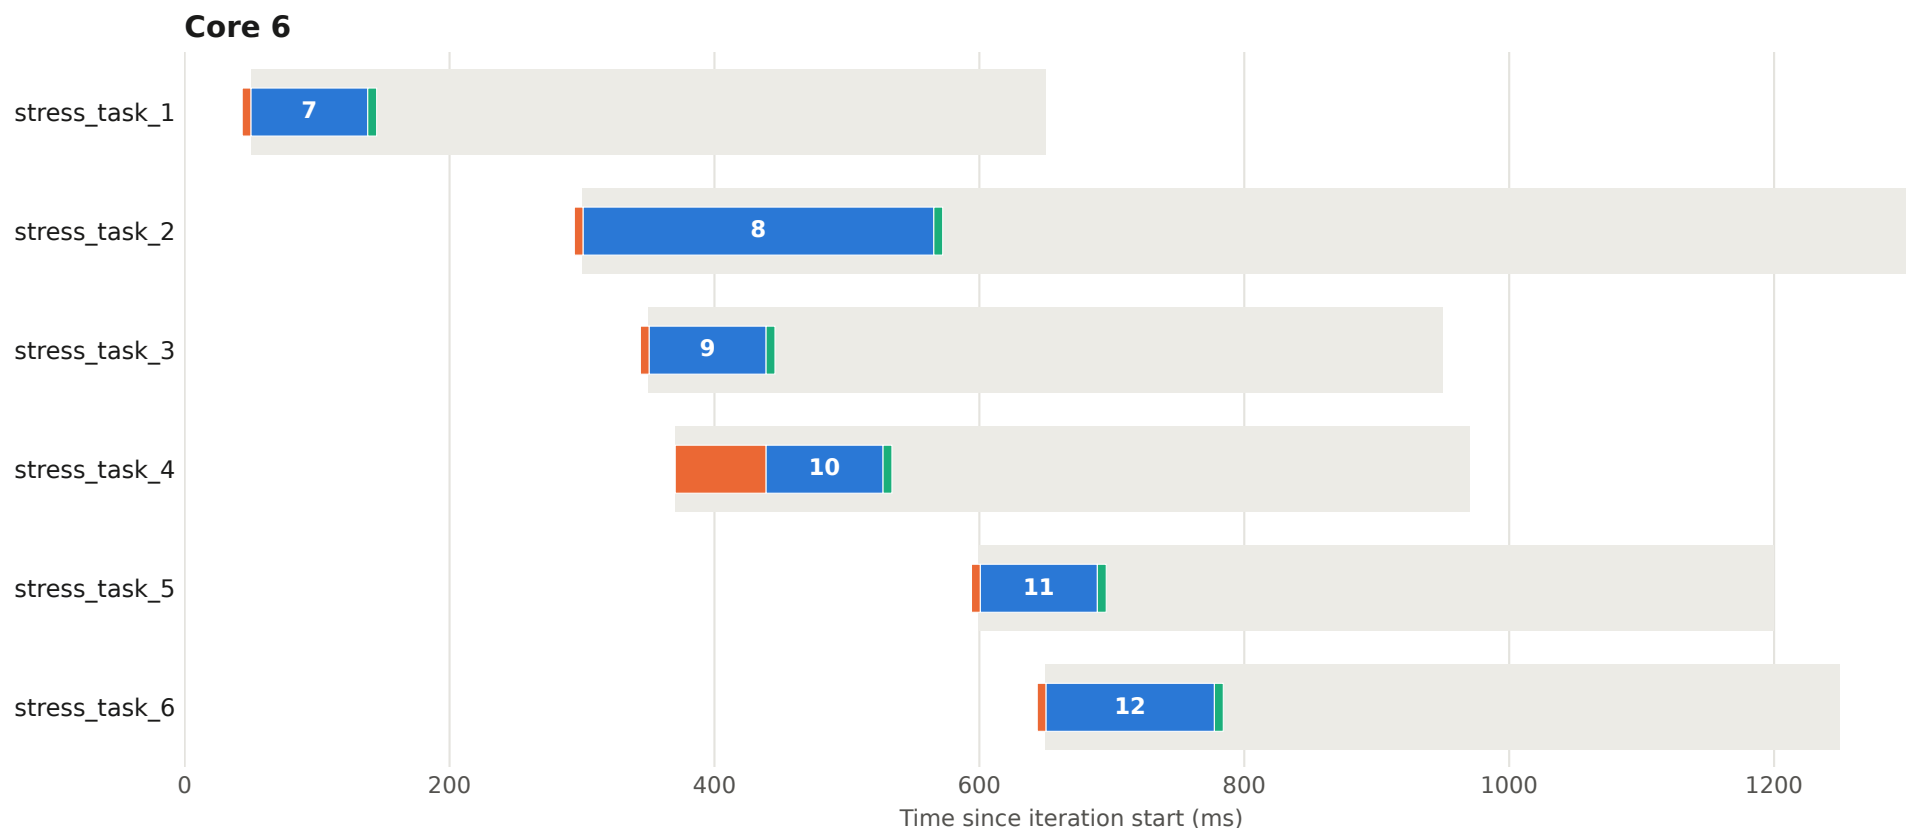


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 18 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

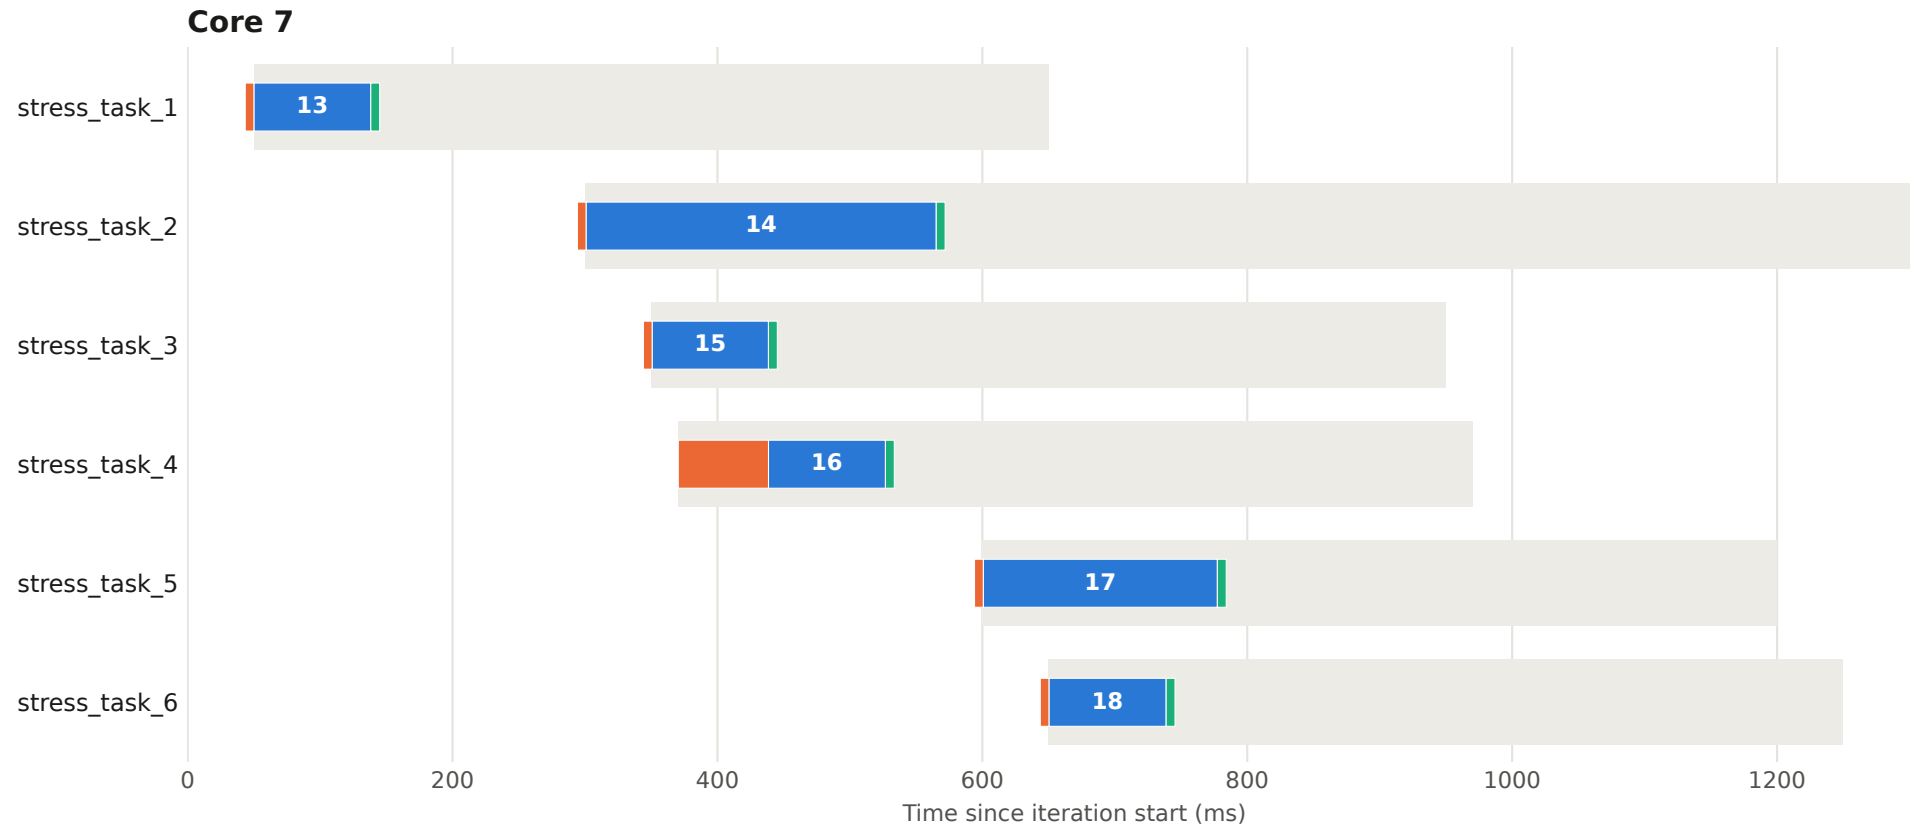


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 19 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

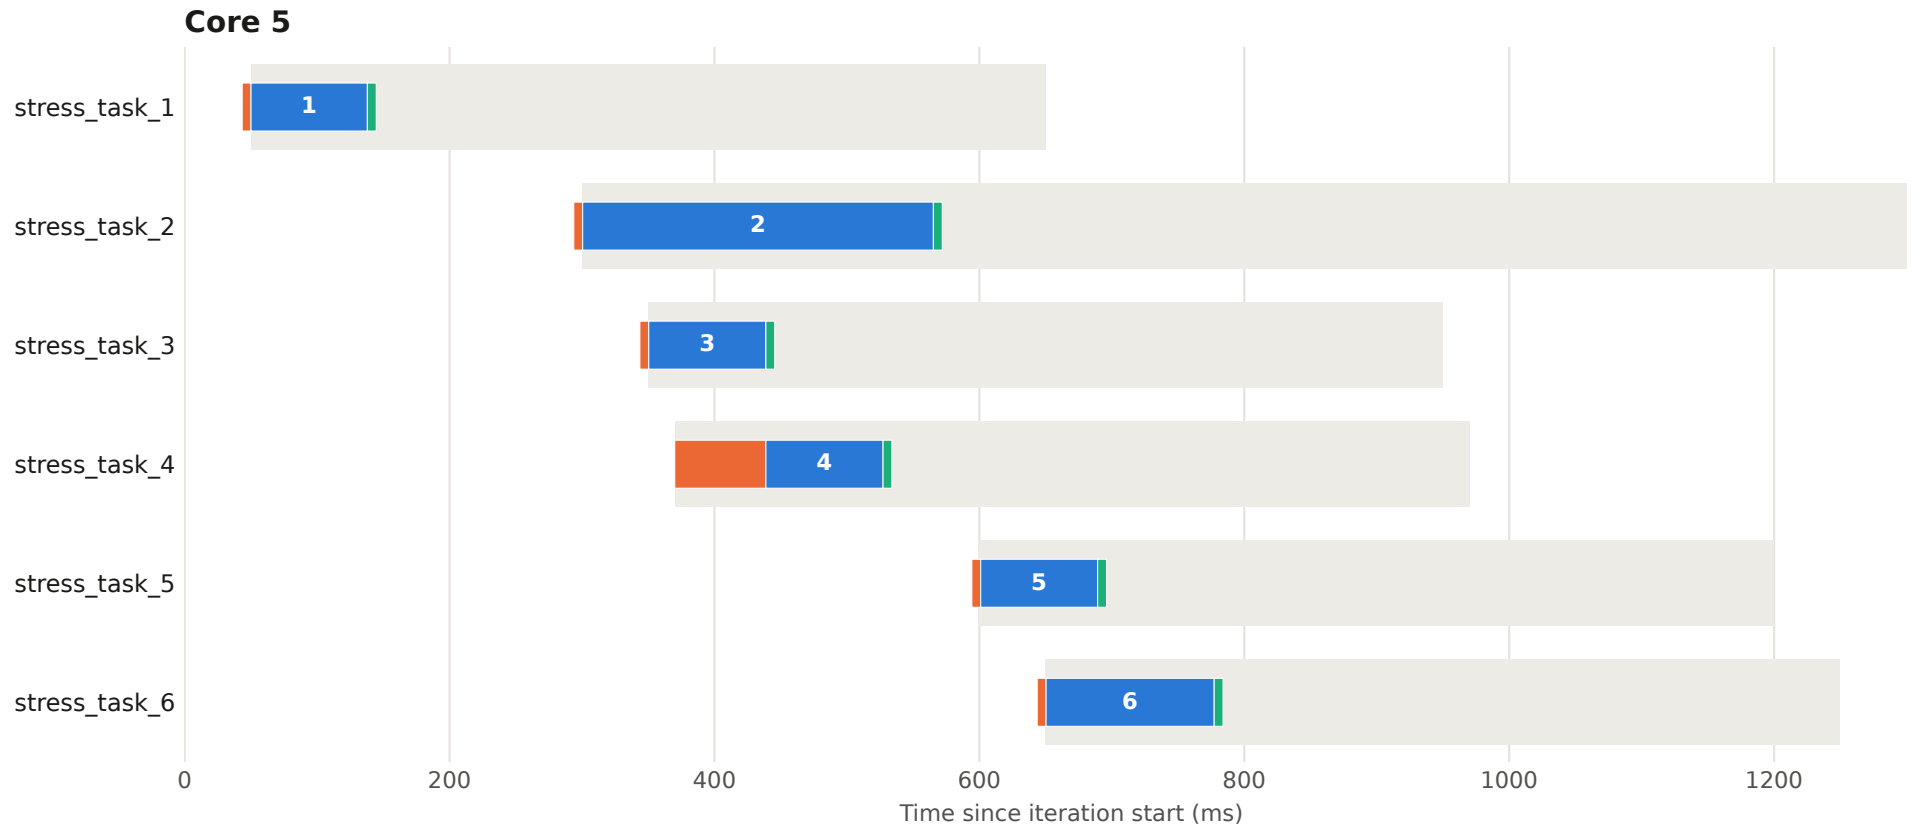


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 19 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

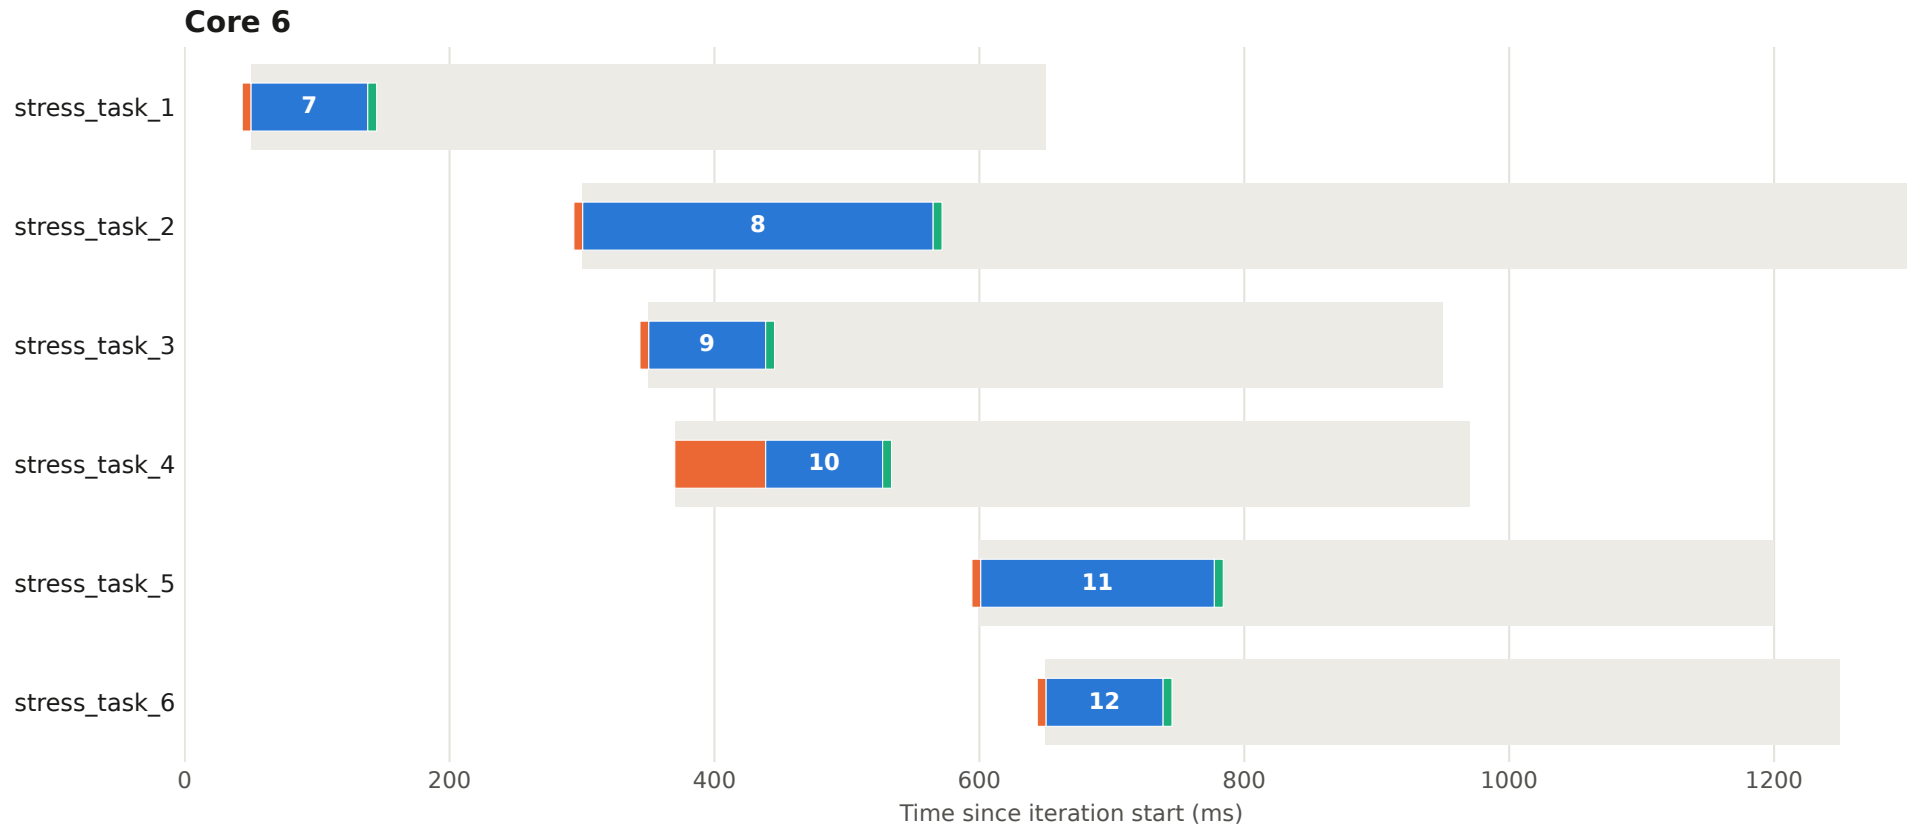


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 19 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

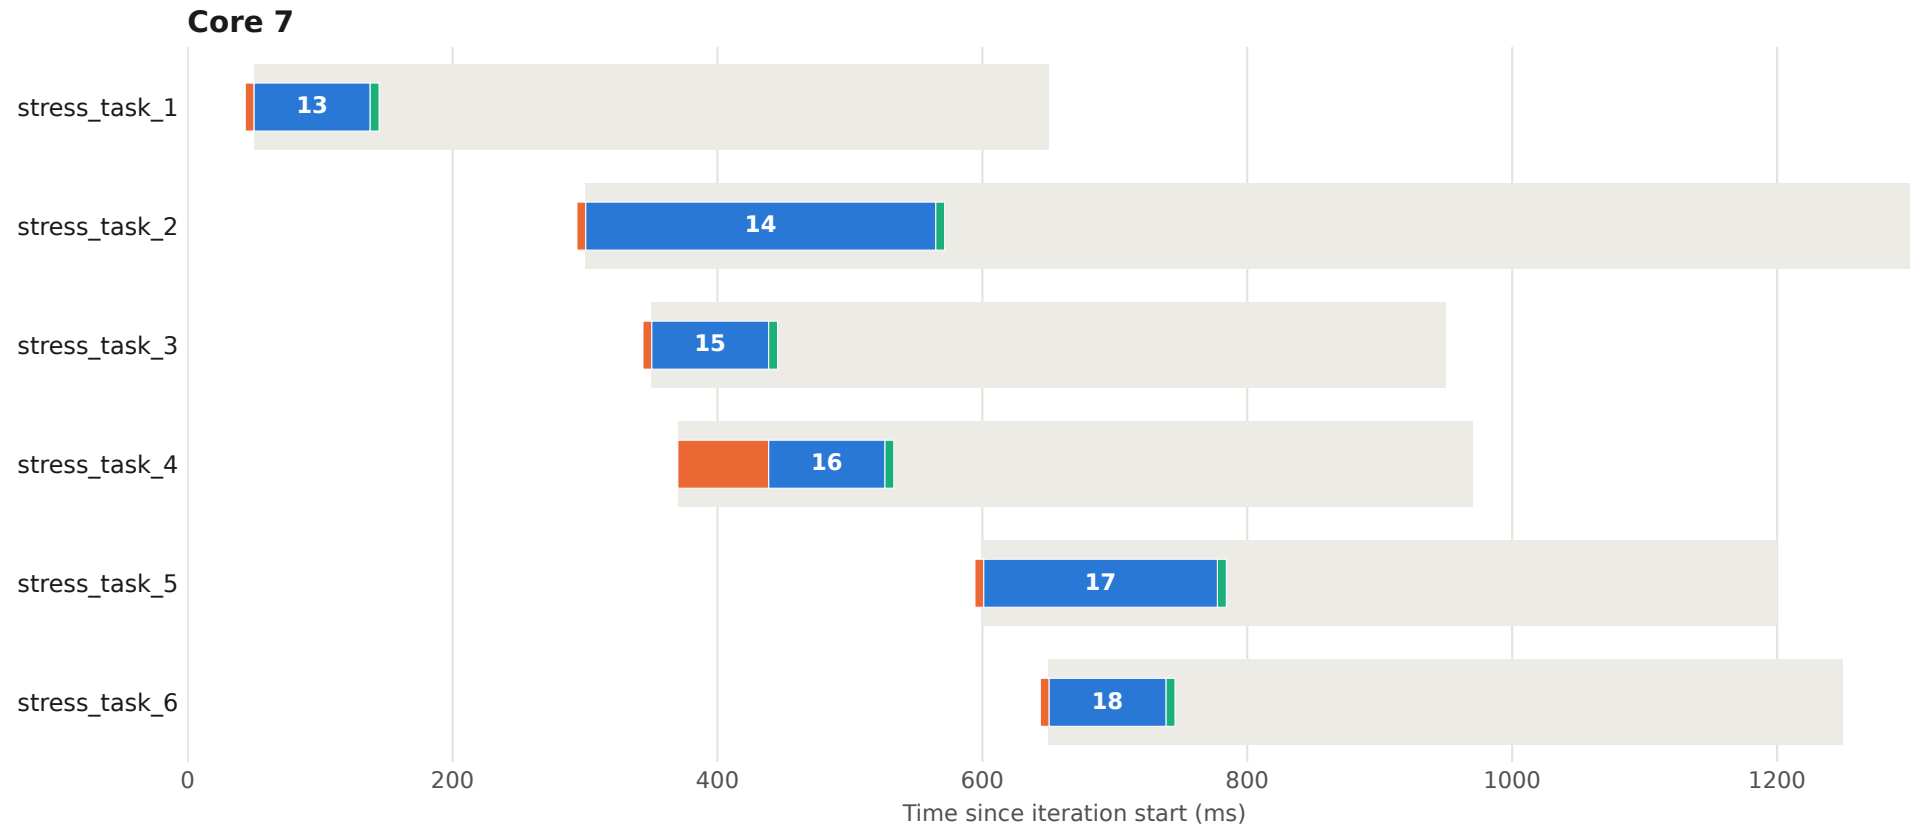


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 20 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

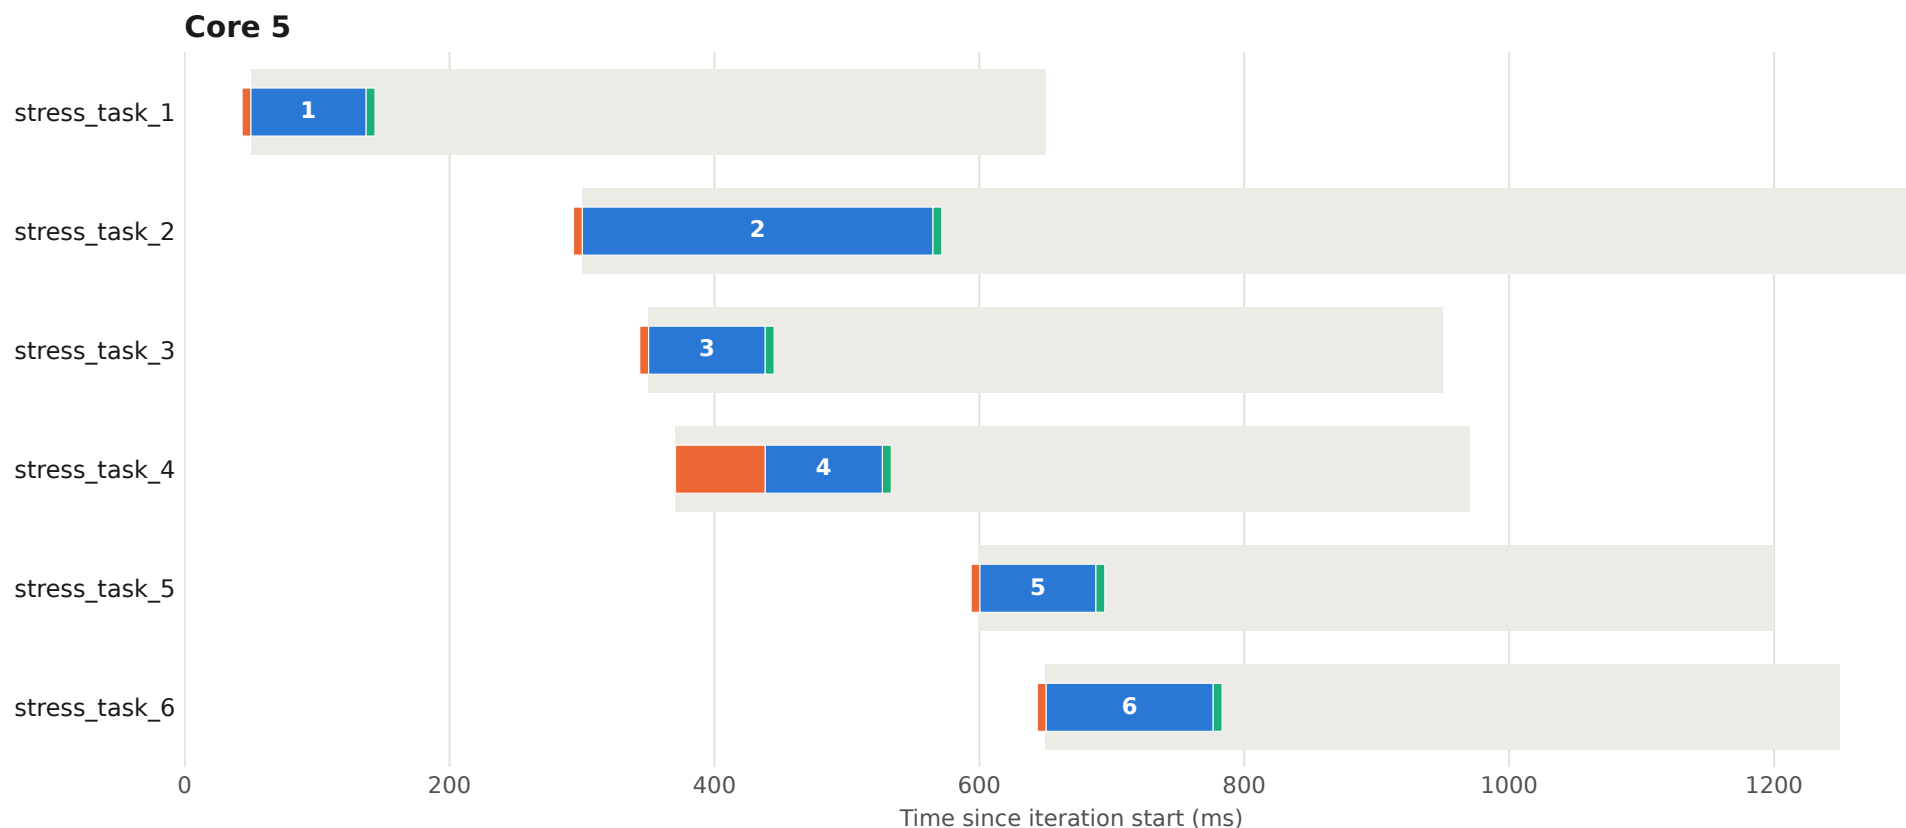


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 20 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

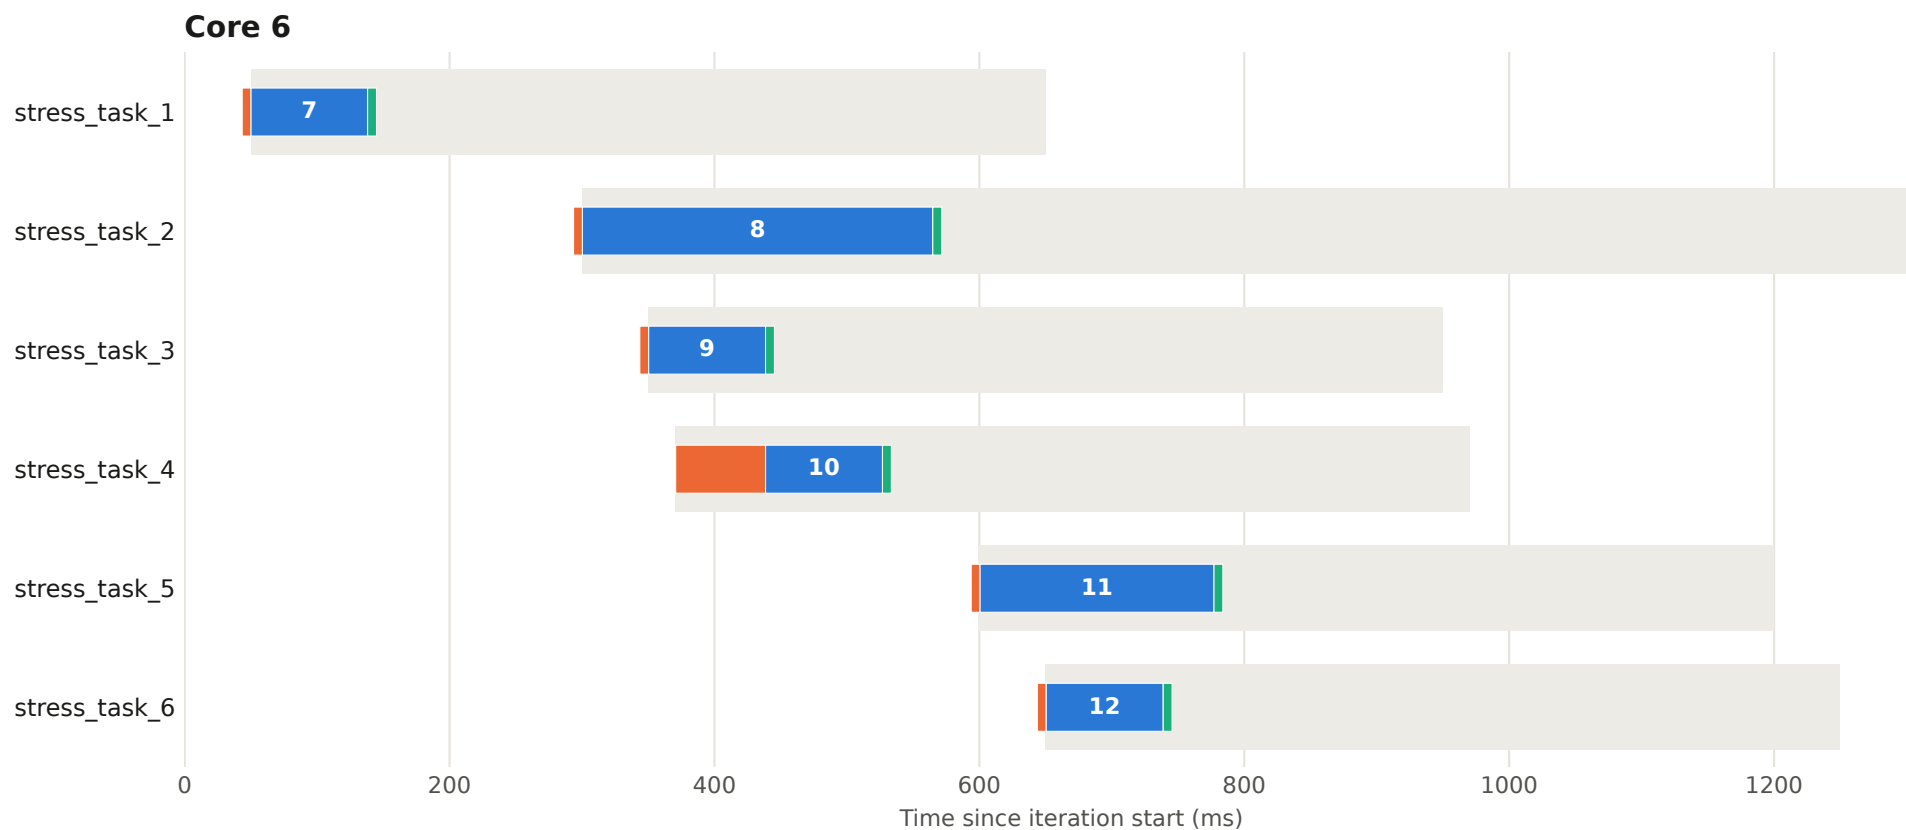


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 20 - core 7

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

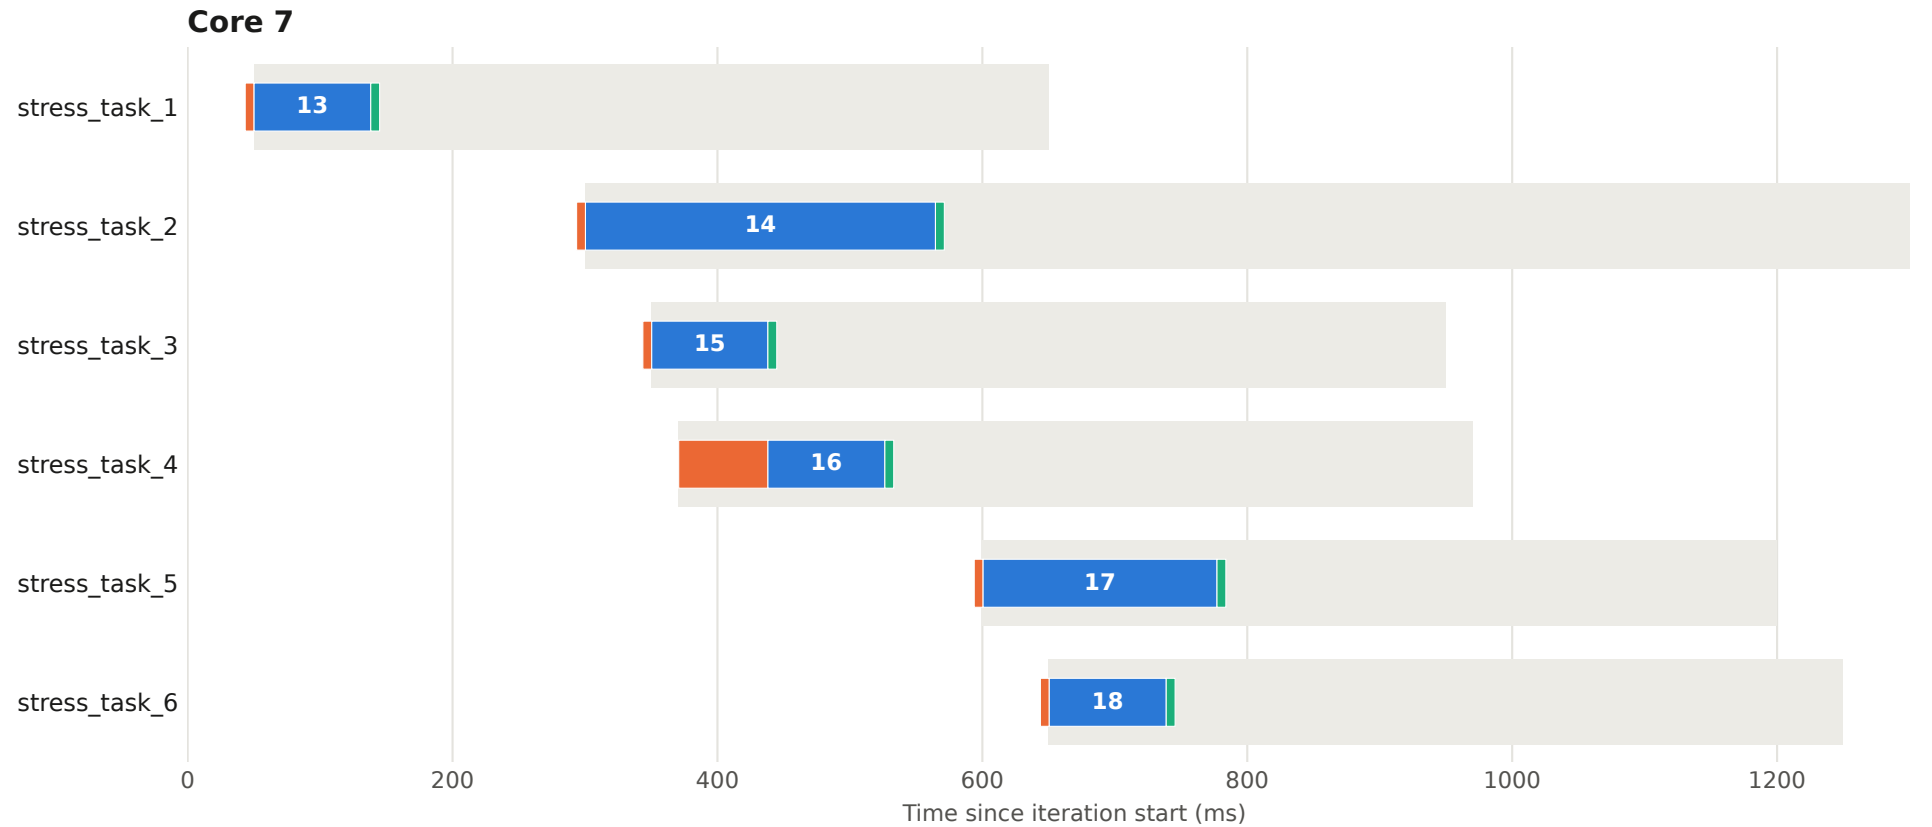

Execution plan - iteration 21 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

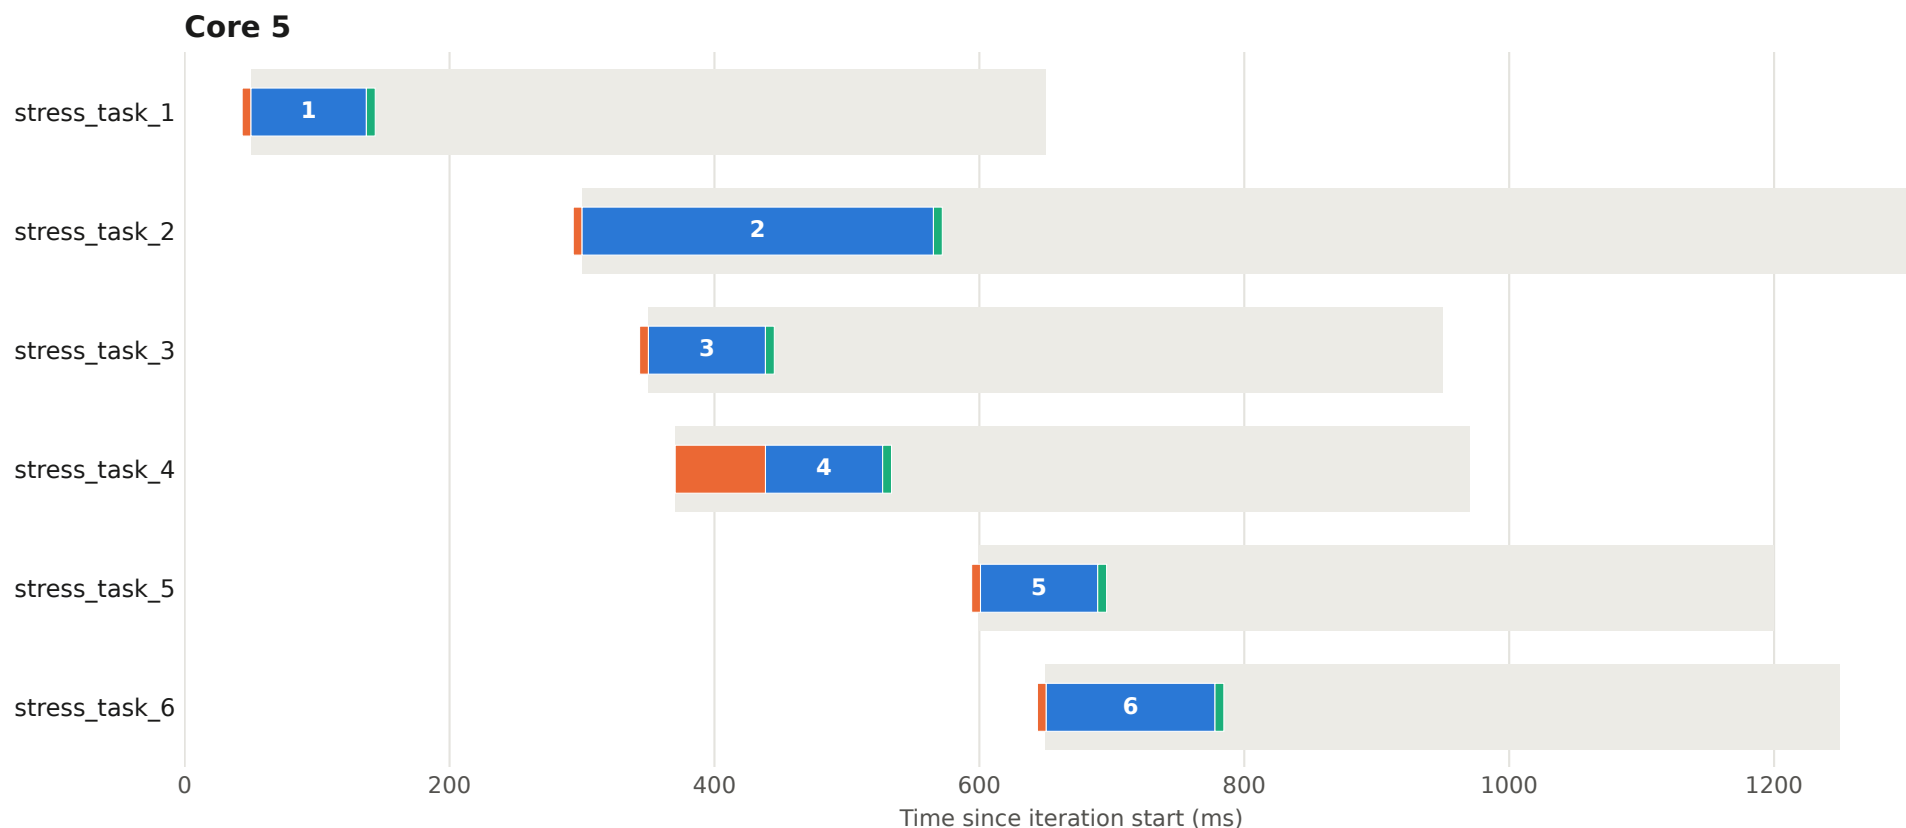


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 21 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

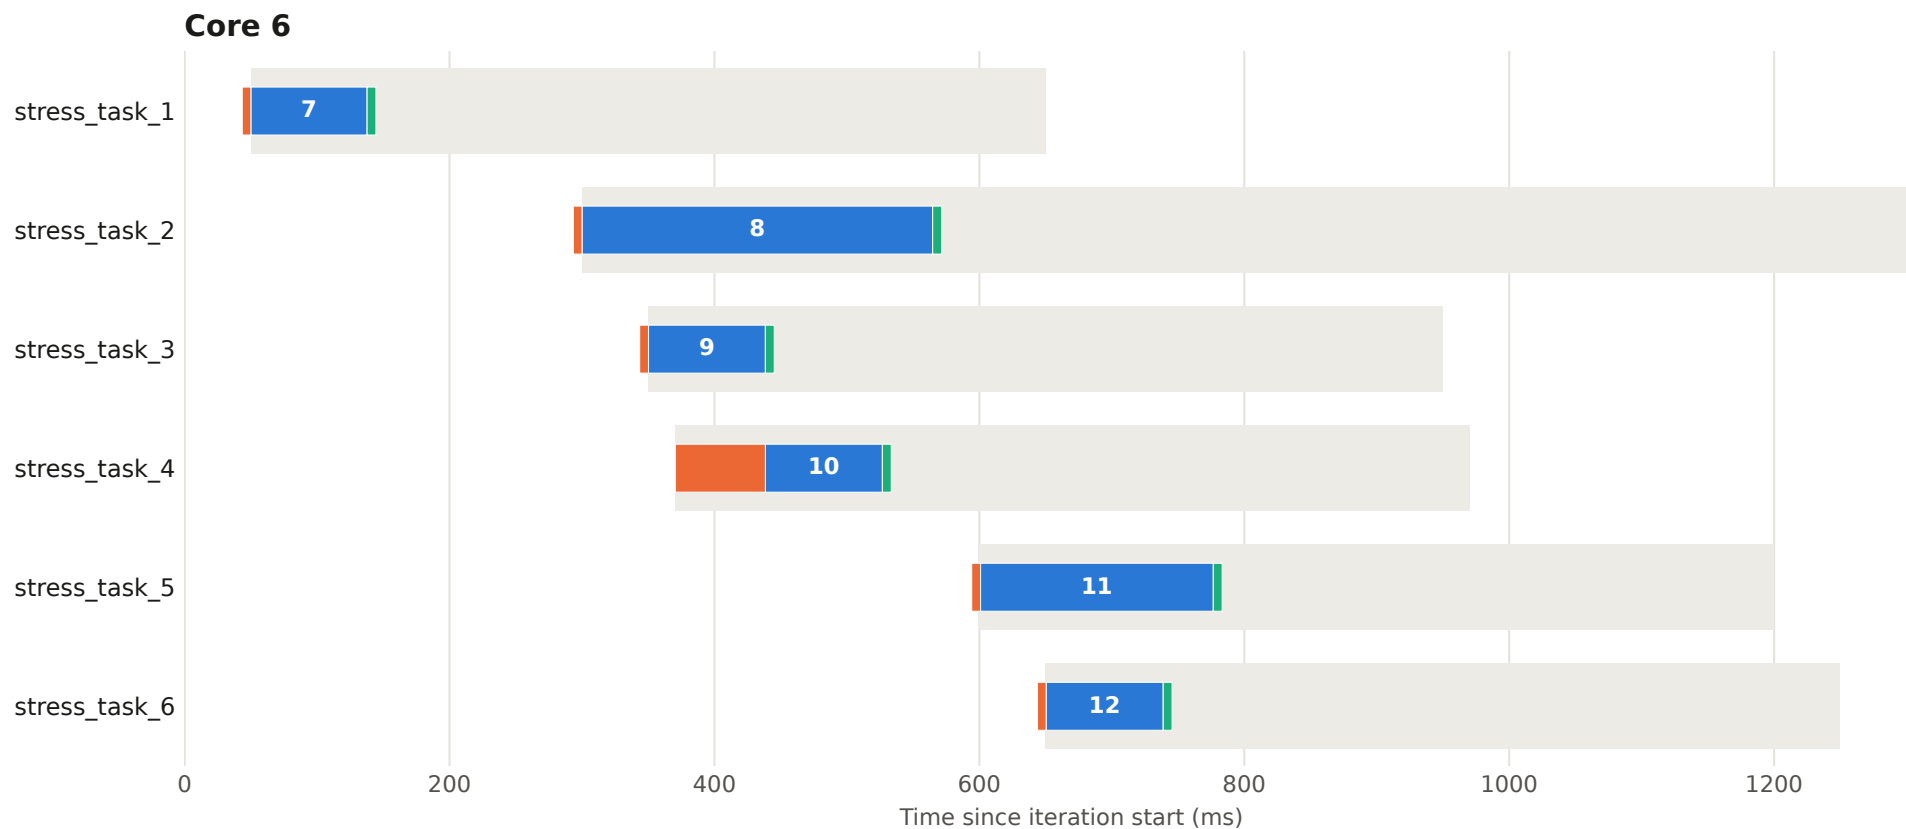


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 21 - core 7

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

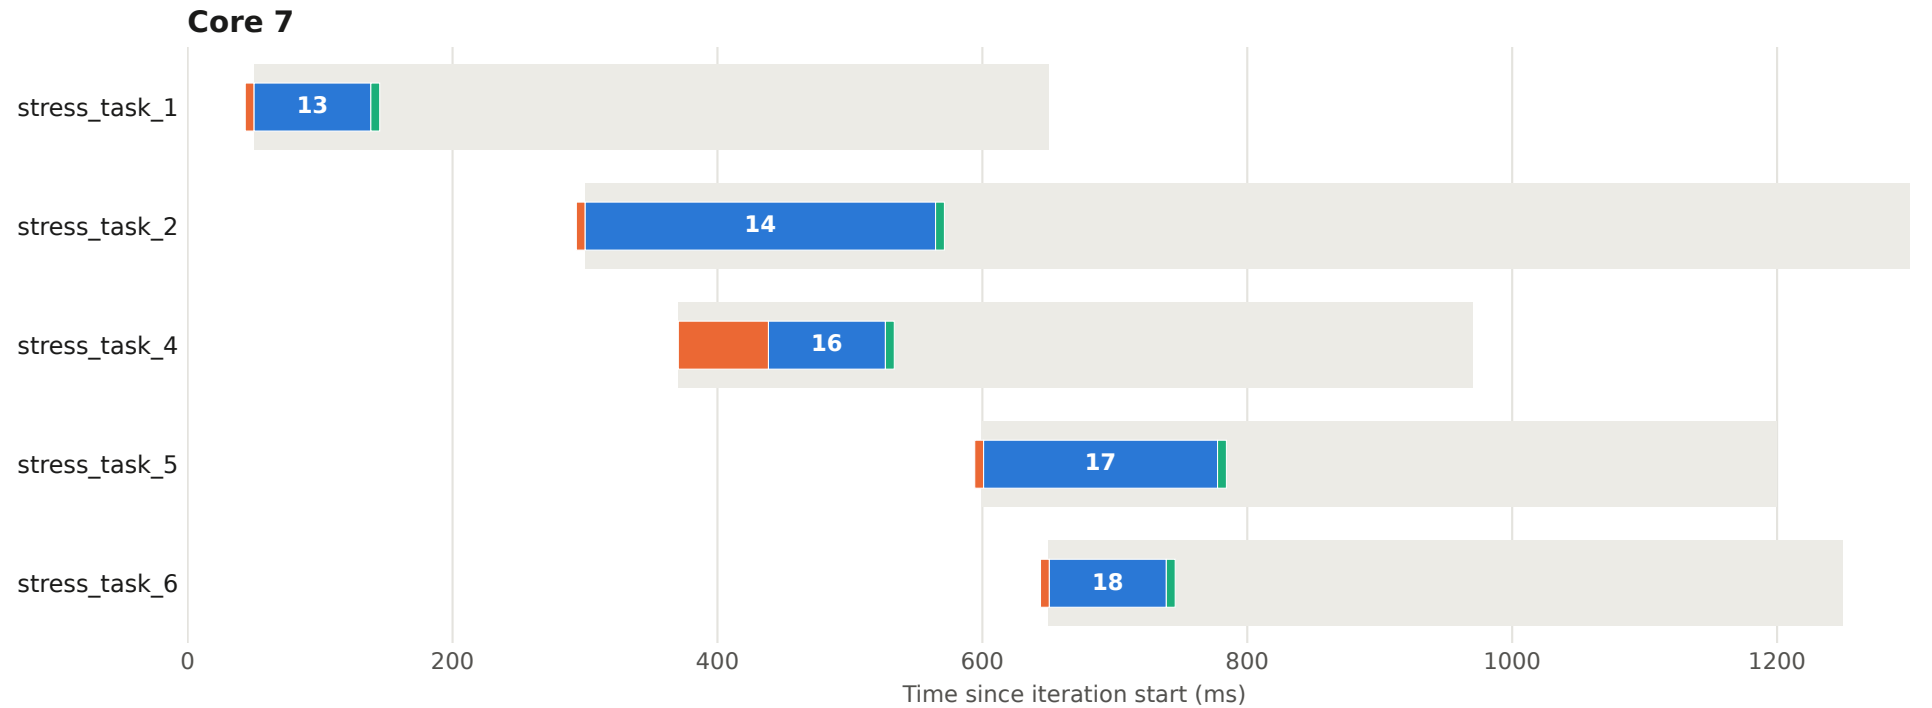

Execution plan - iteration 21 - core 72026

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

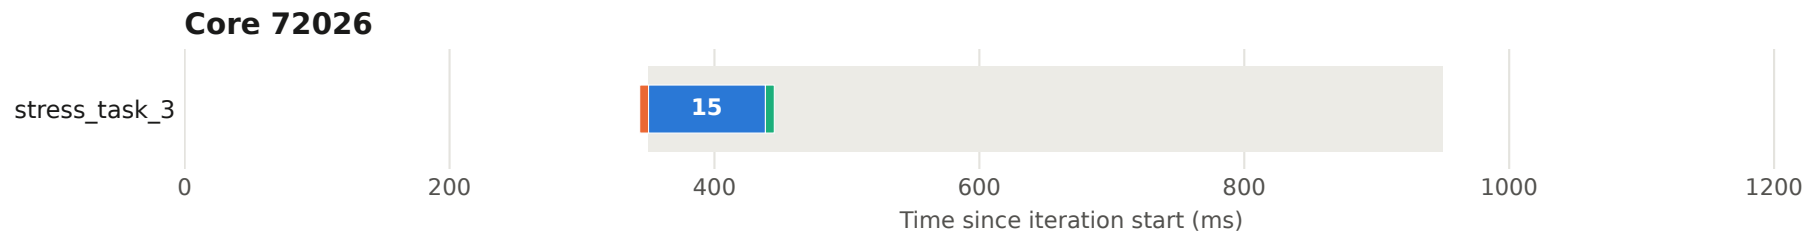


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 22 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

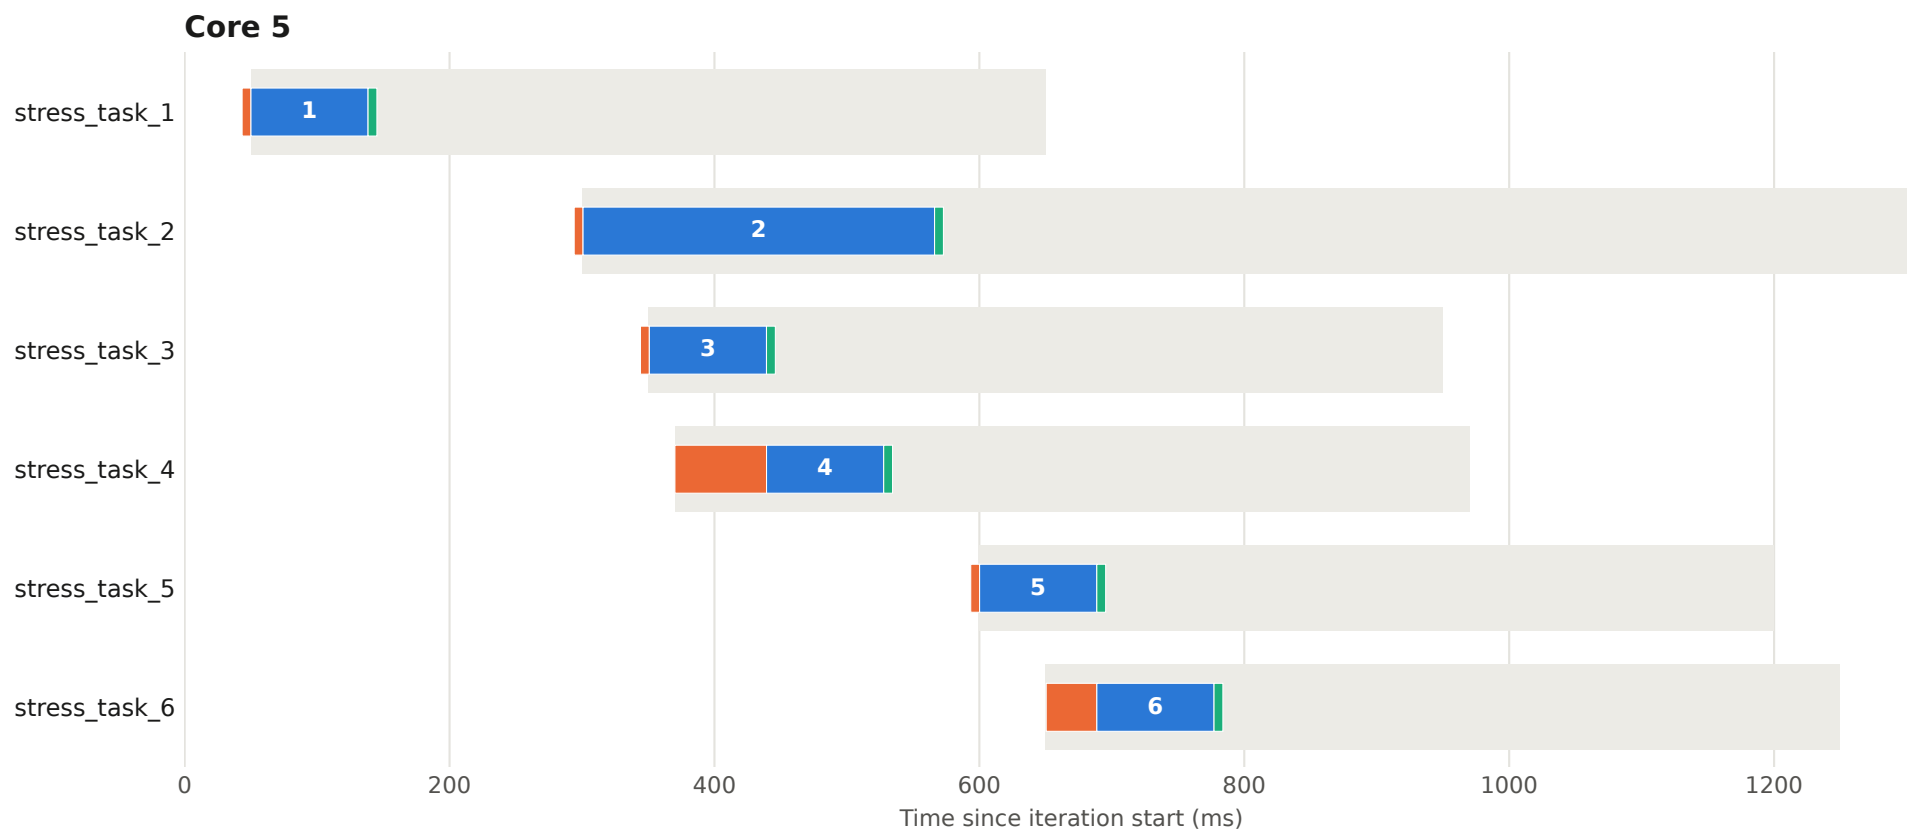


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 22 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

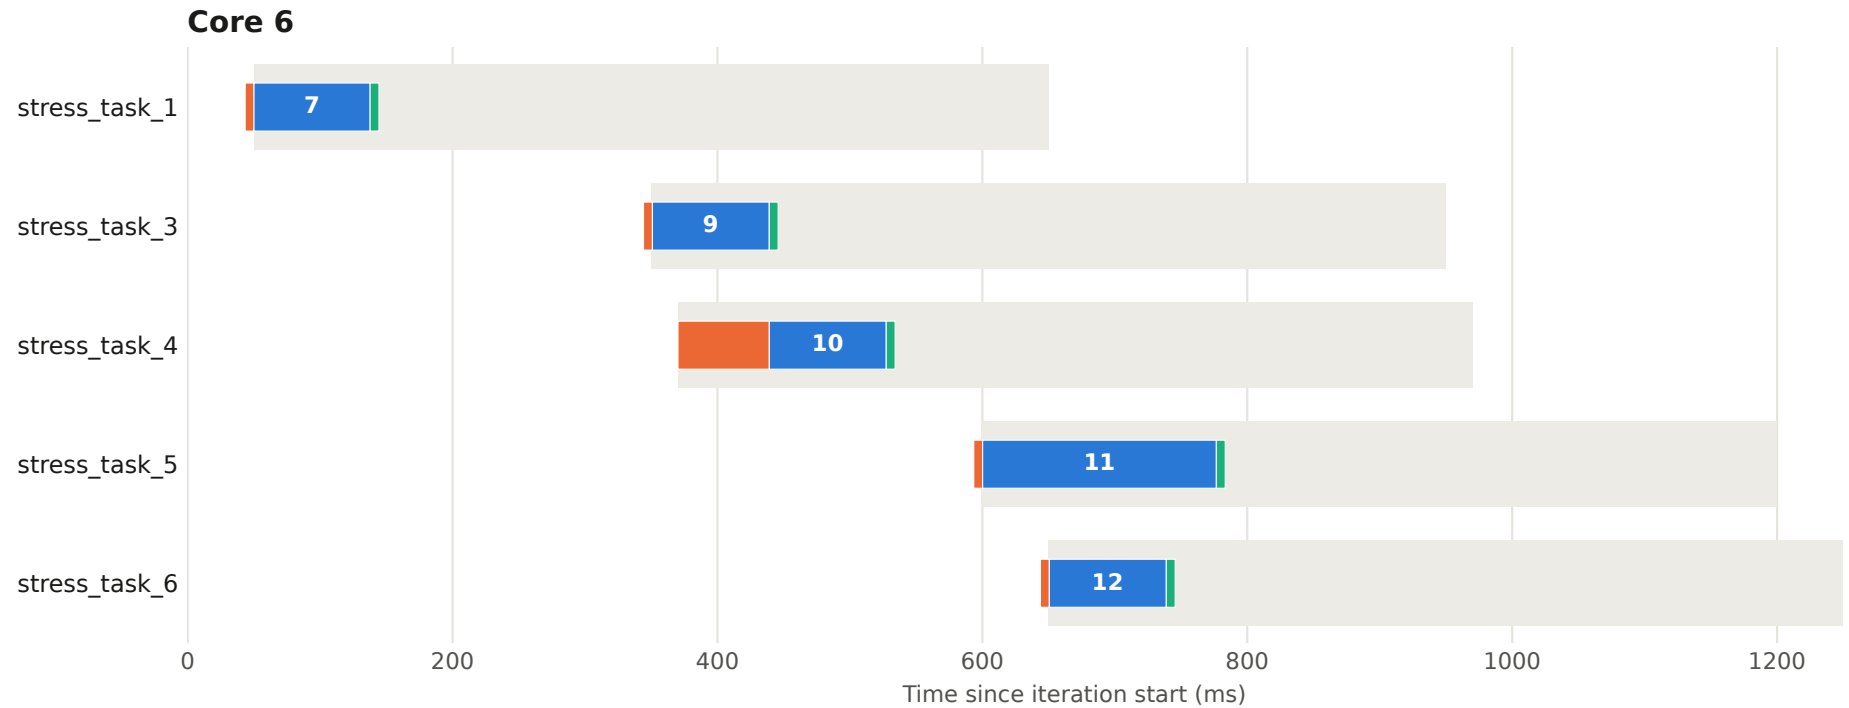


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 22 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

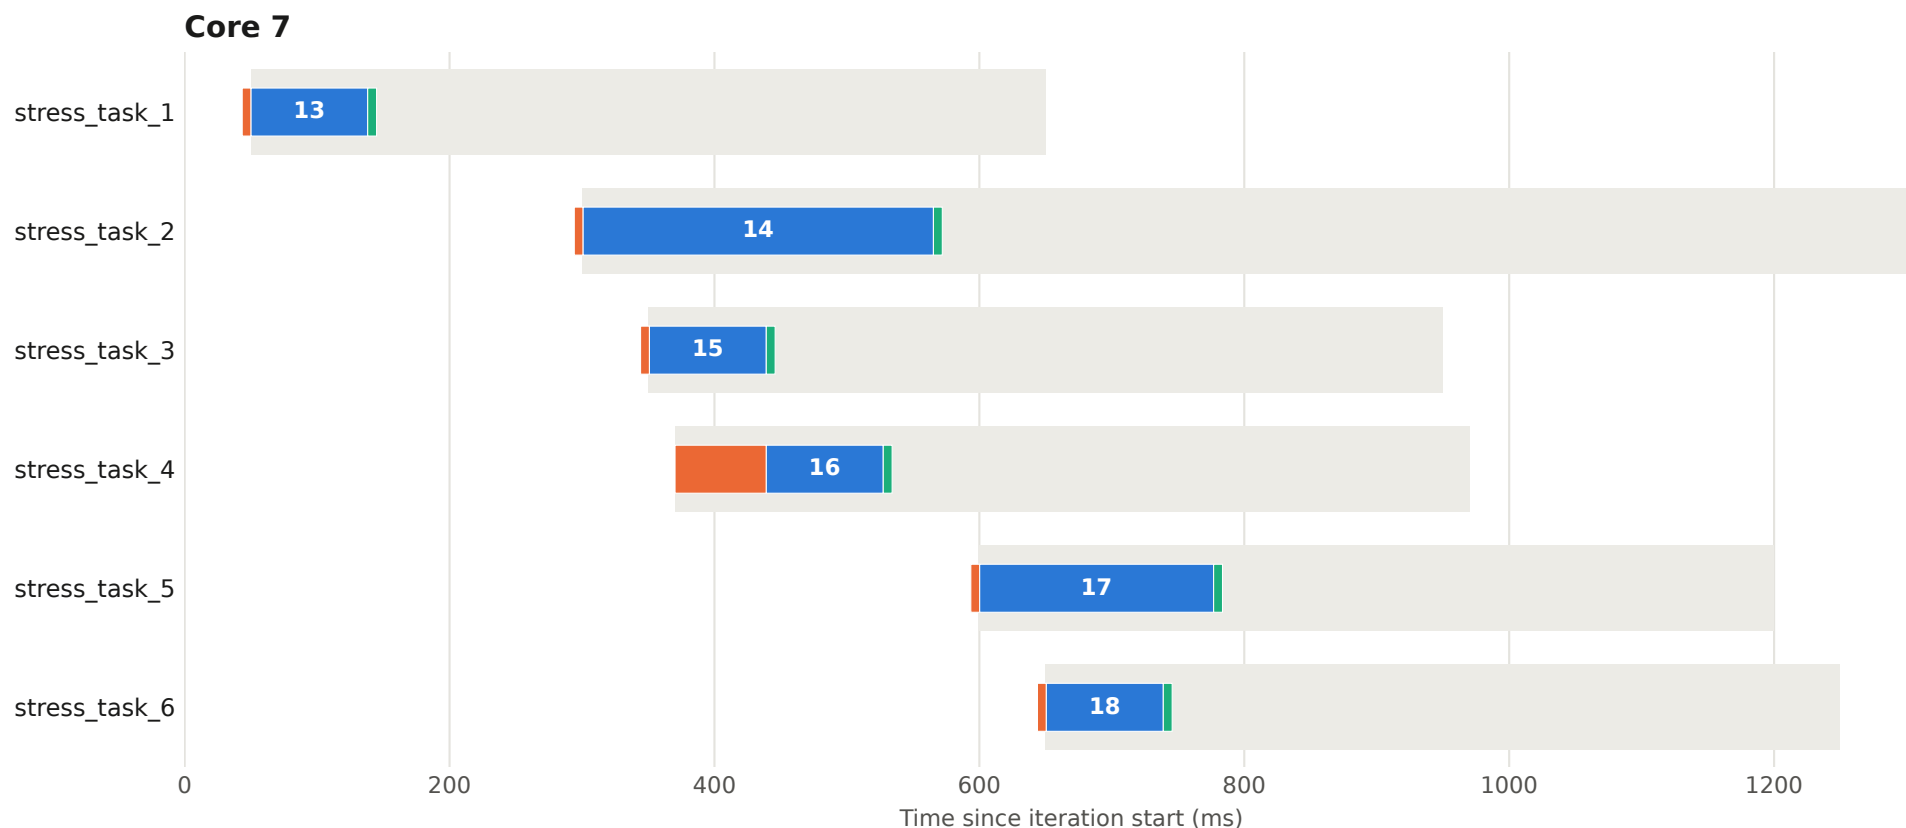


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 23 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

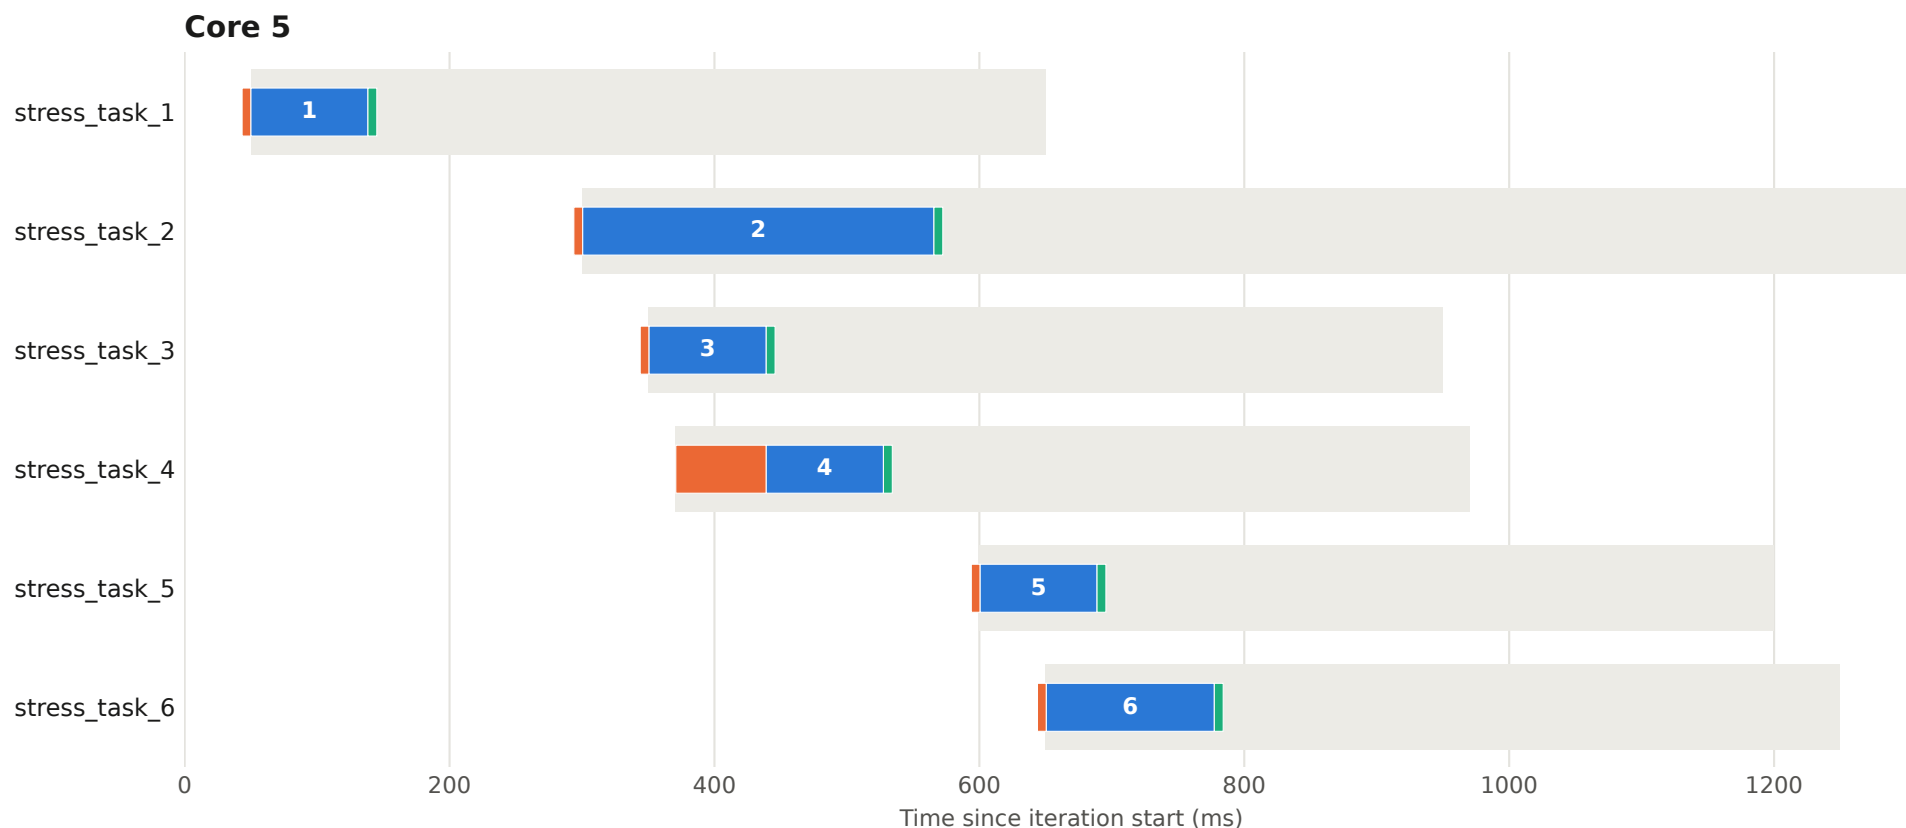


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 23 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

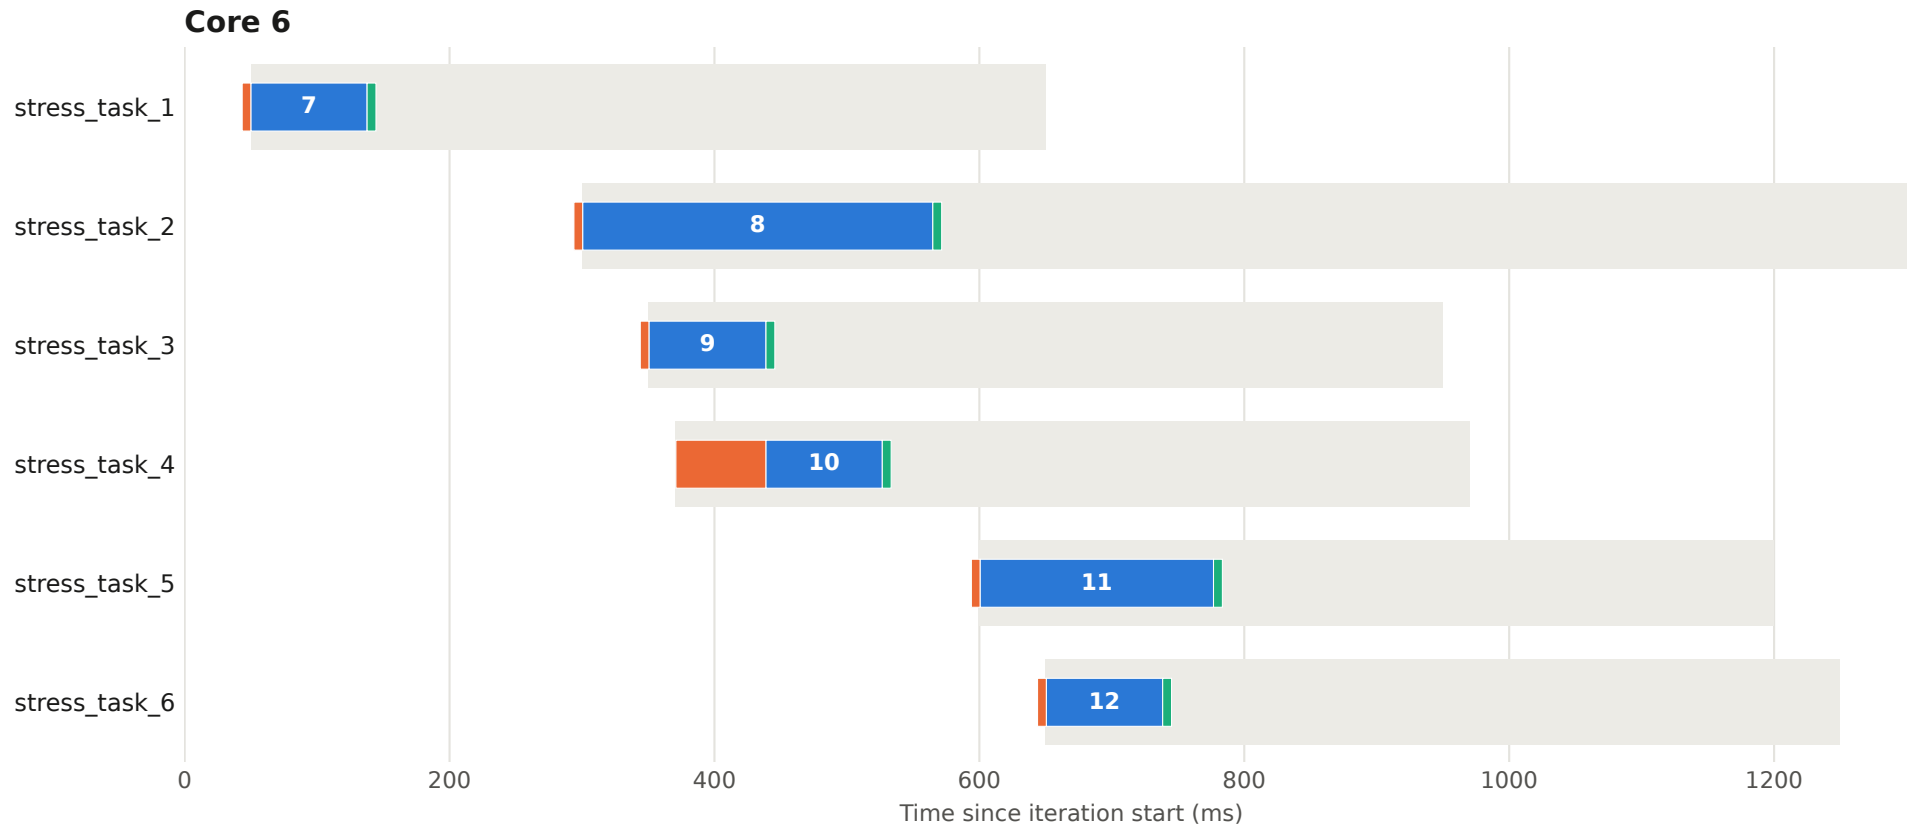


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 23 - core 7

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

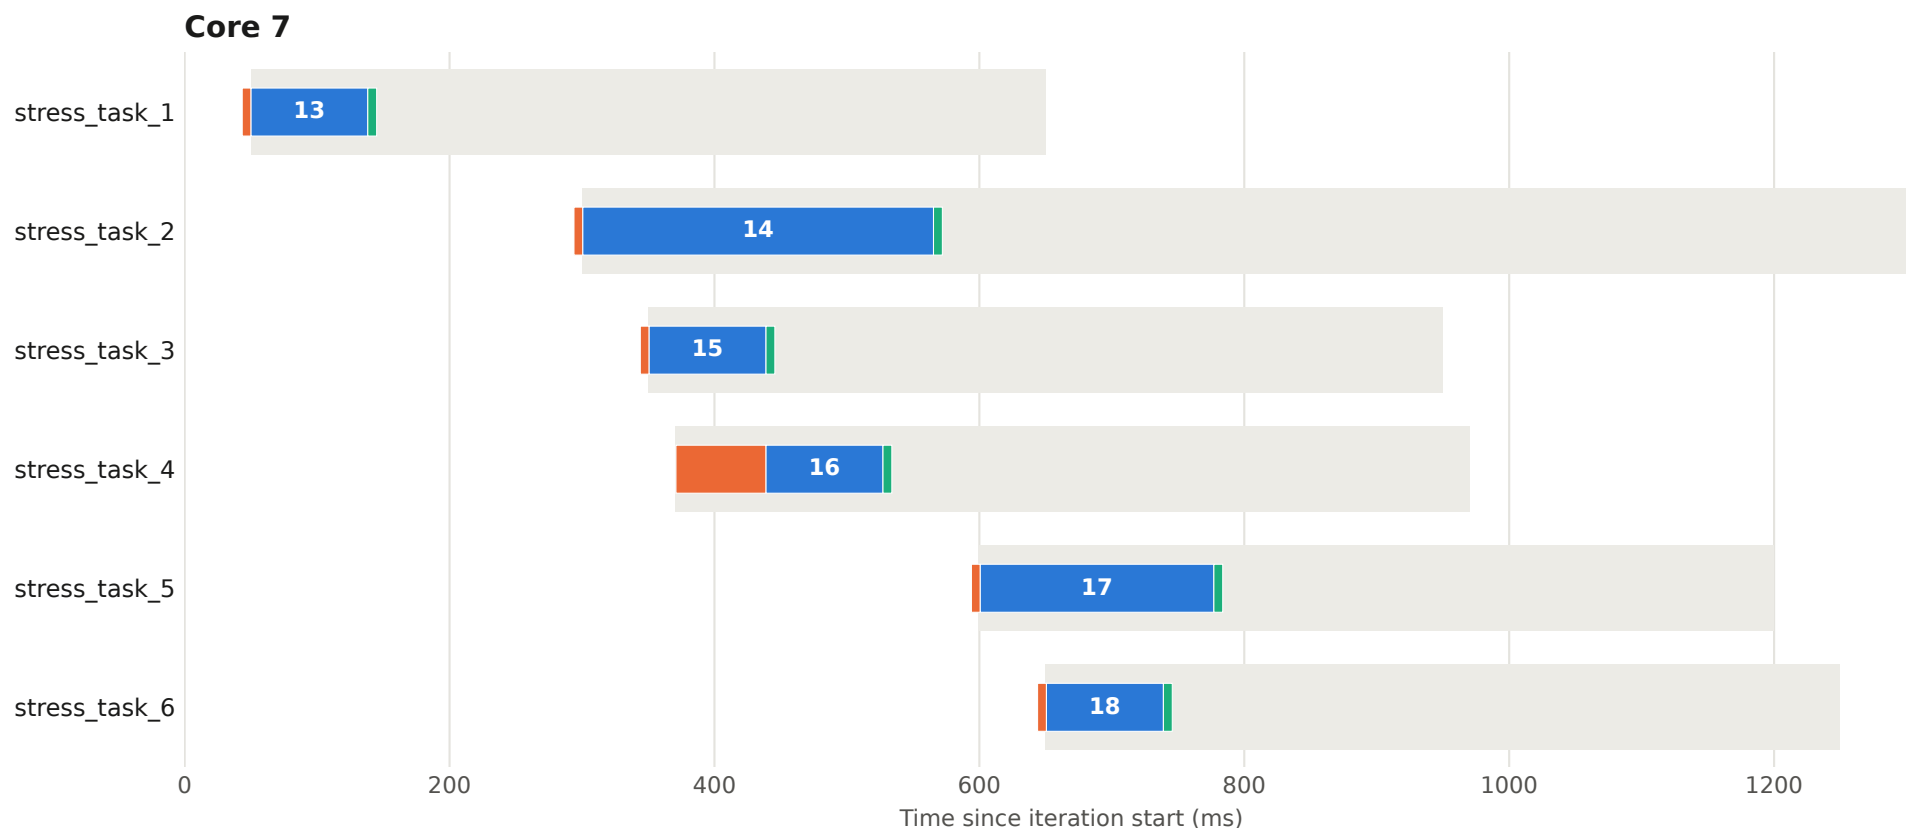

Execution plan - iteration 24 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

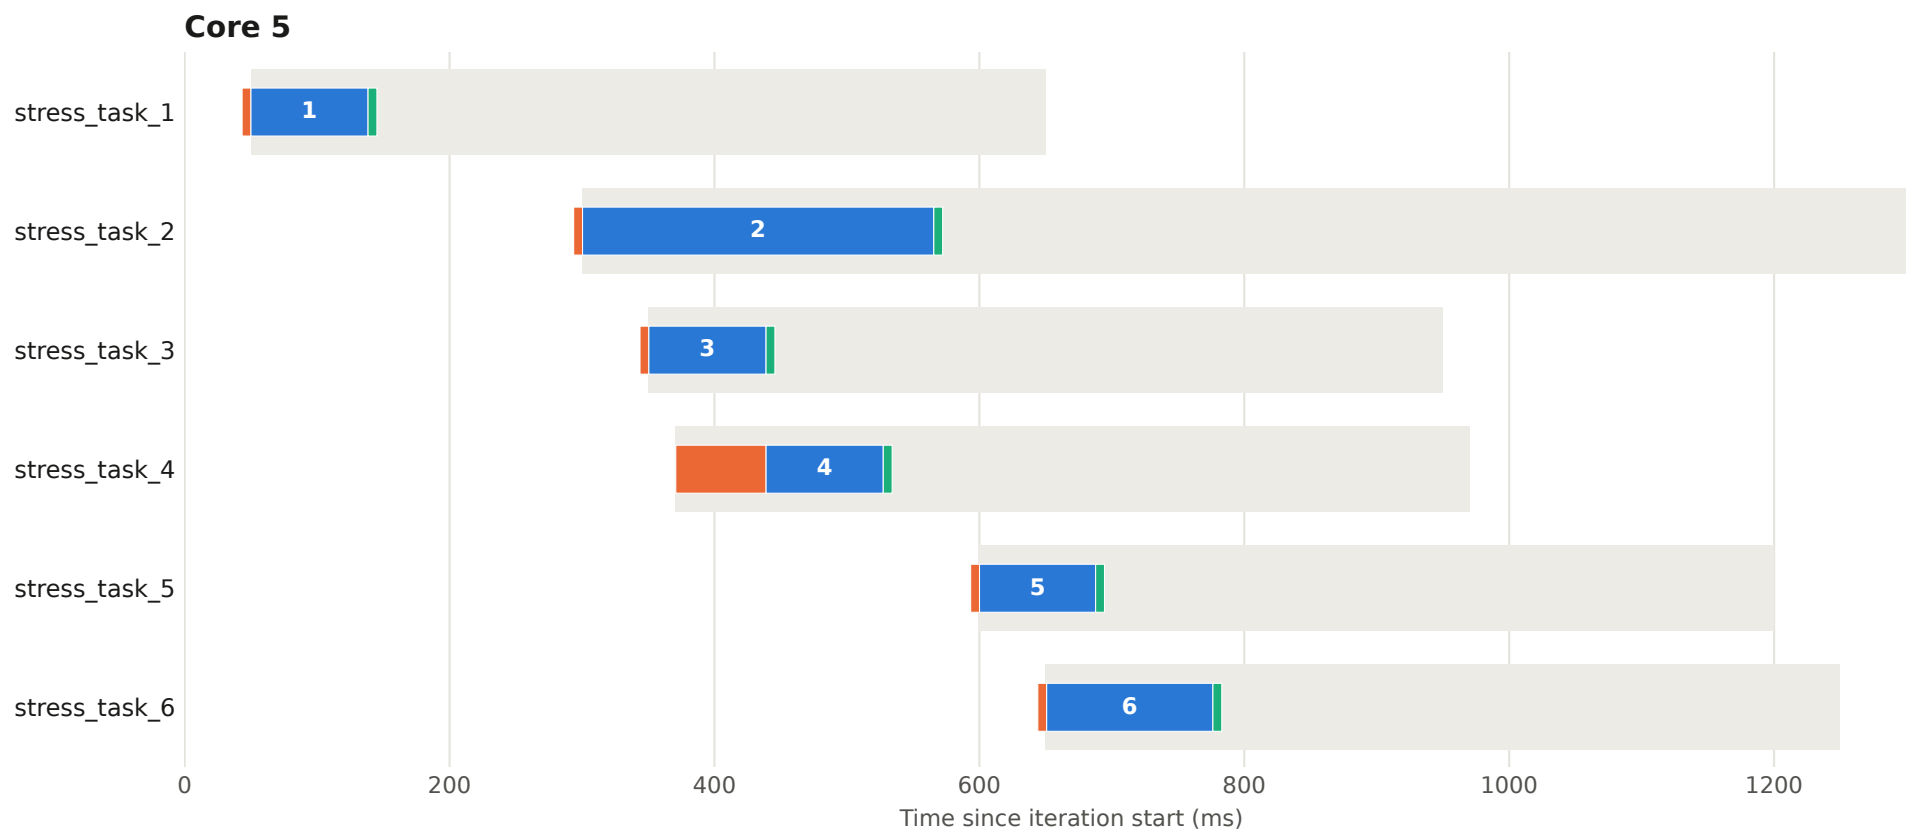


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 24 - core 6

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

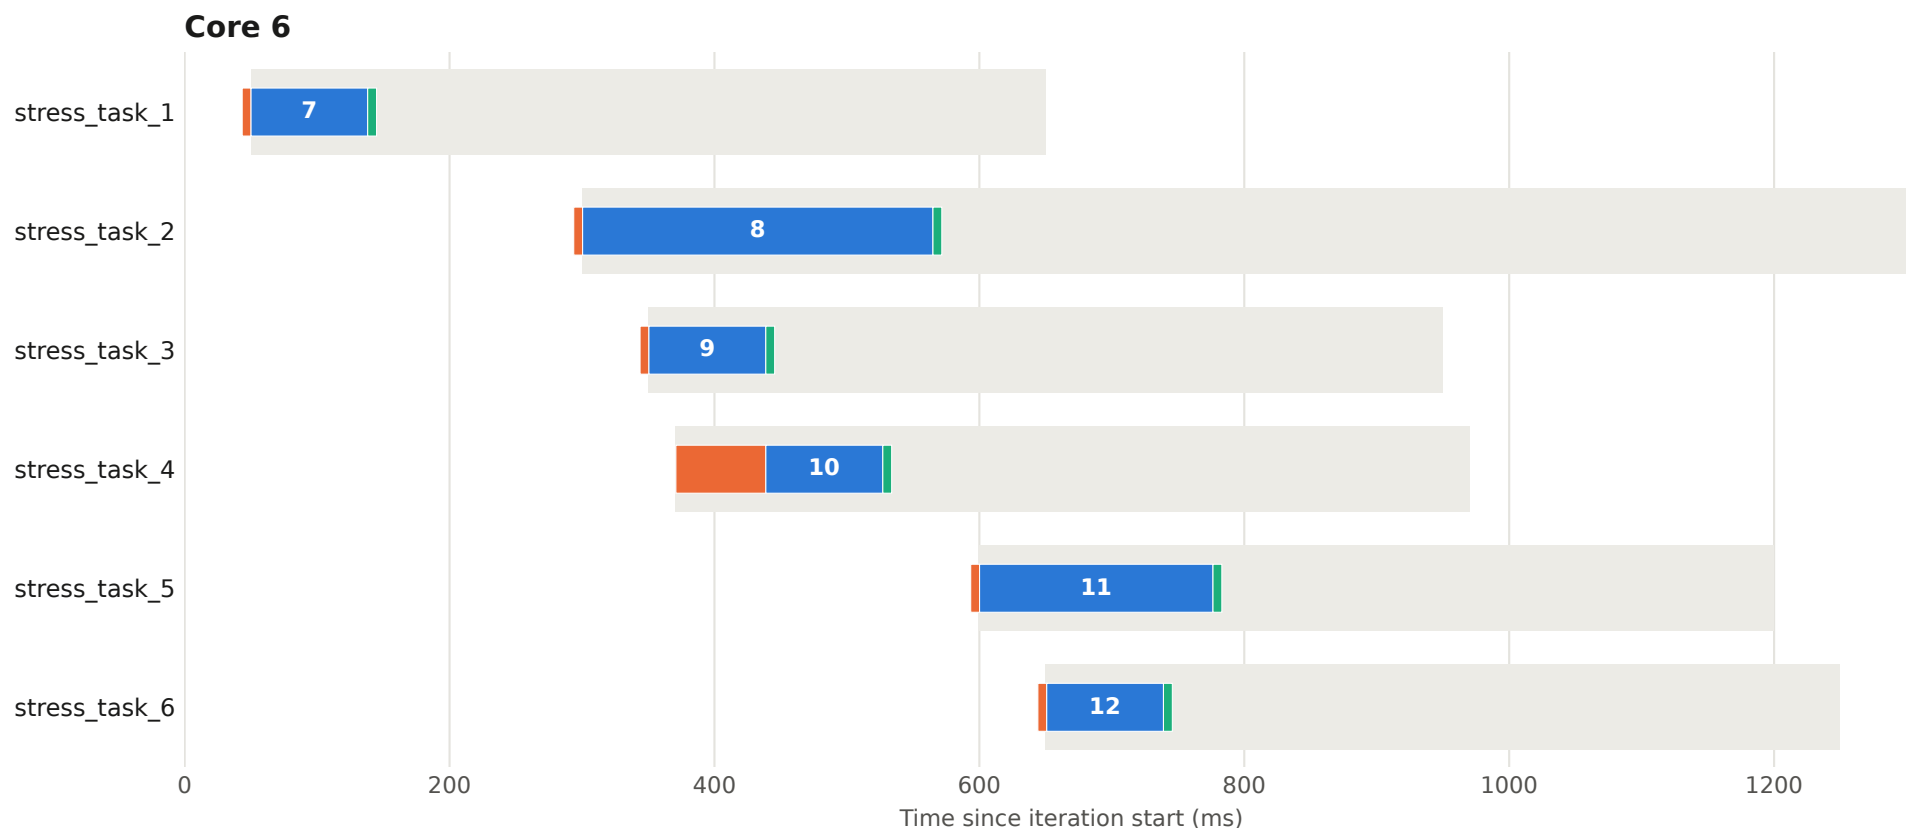

Execution plan - iteration 24 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

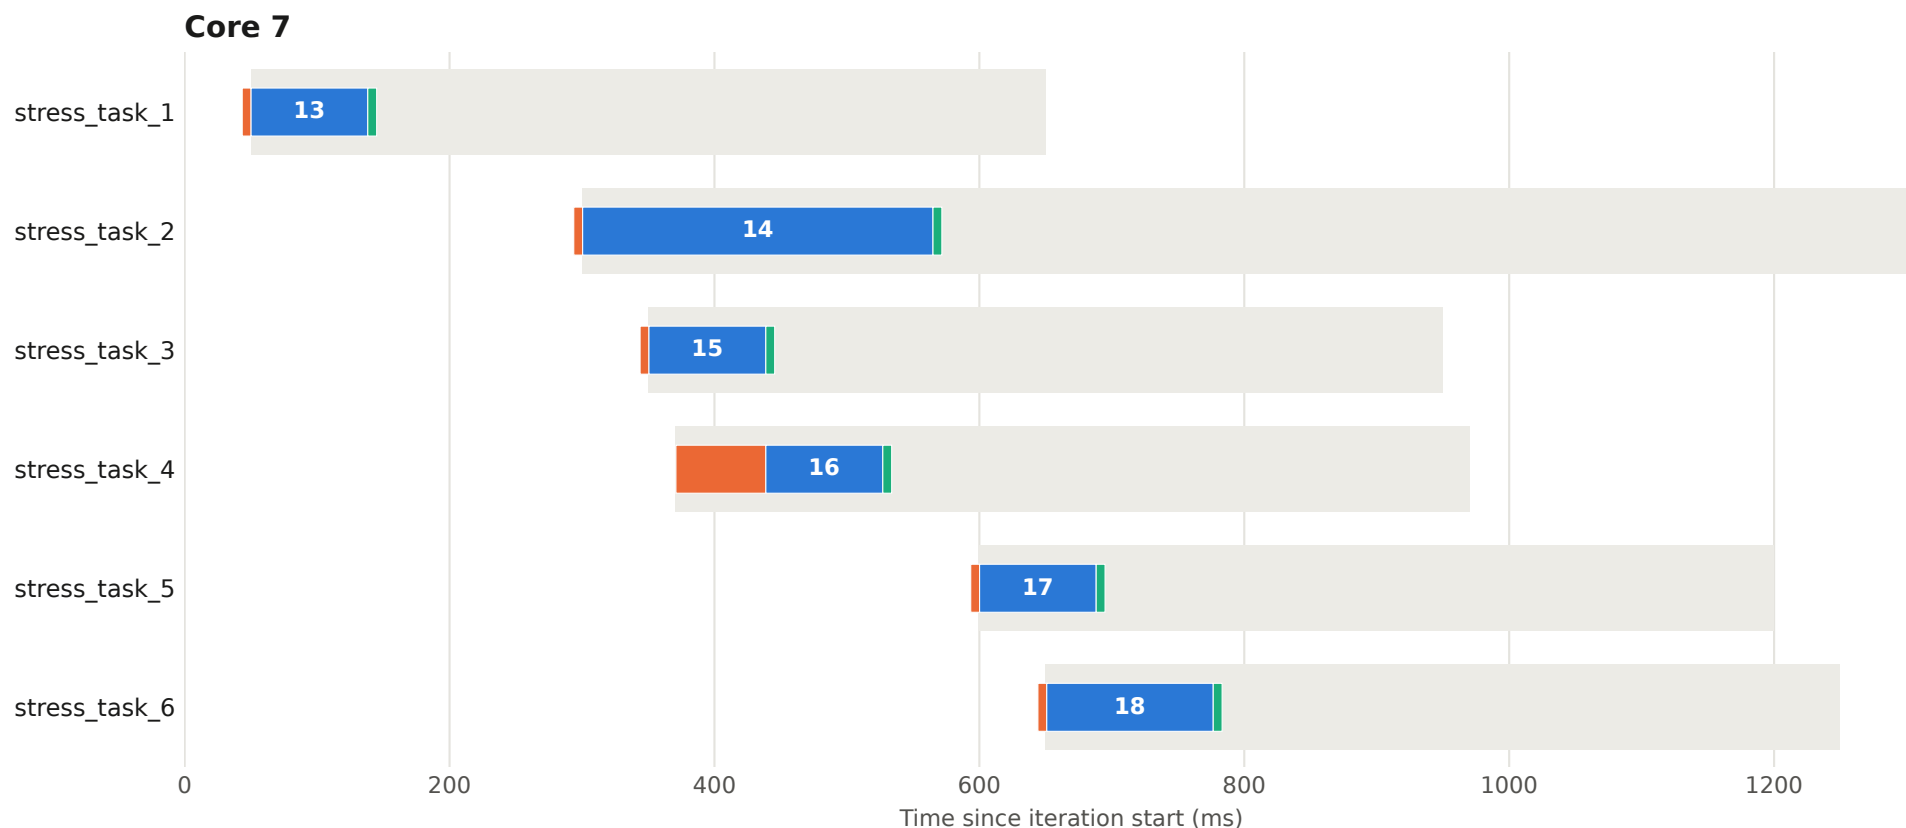


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 25 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

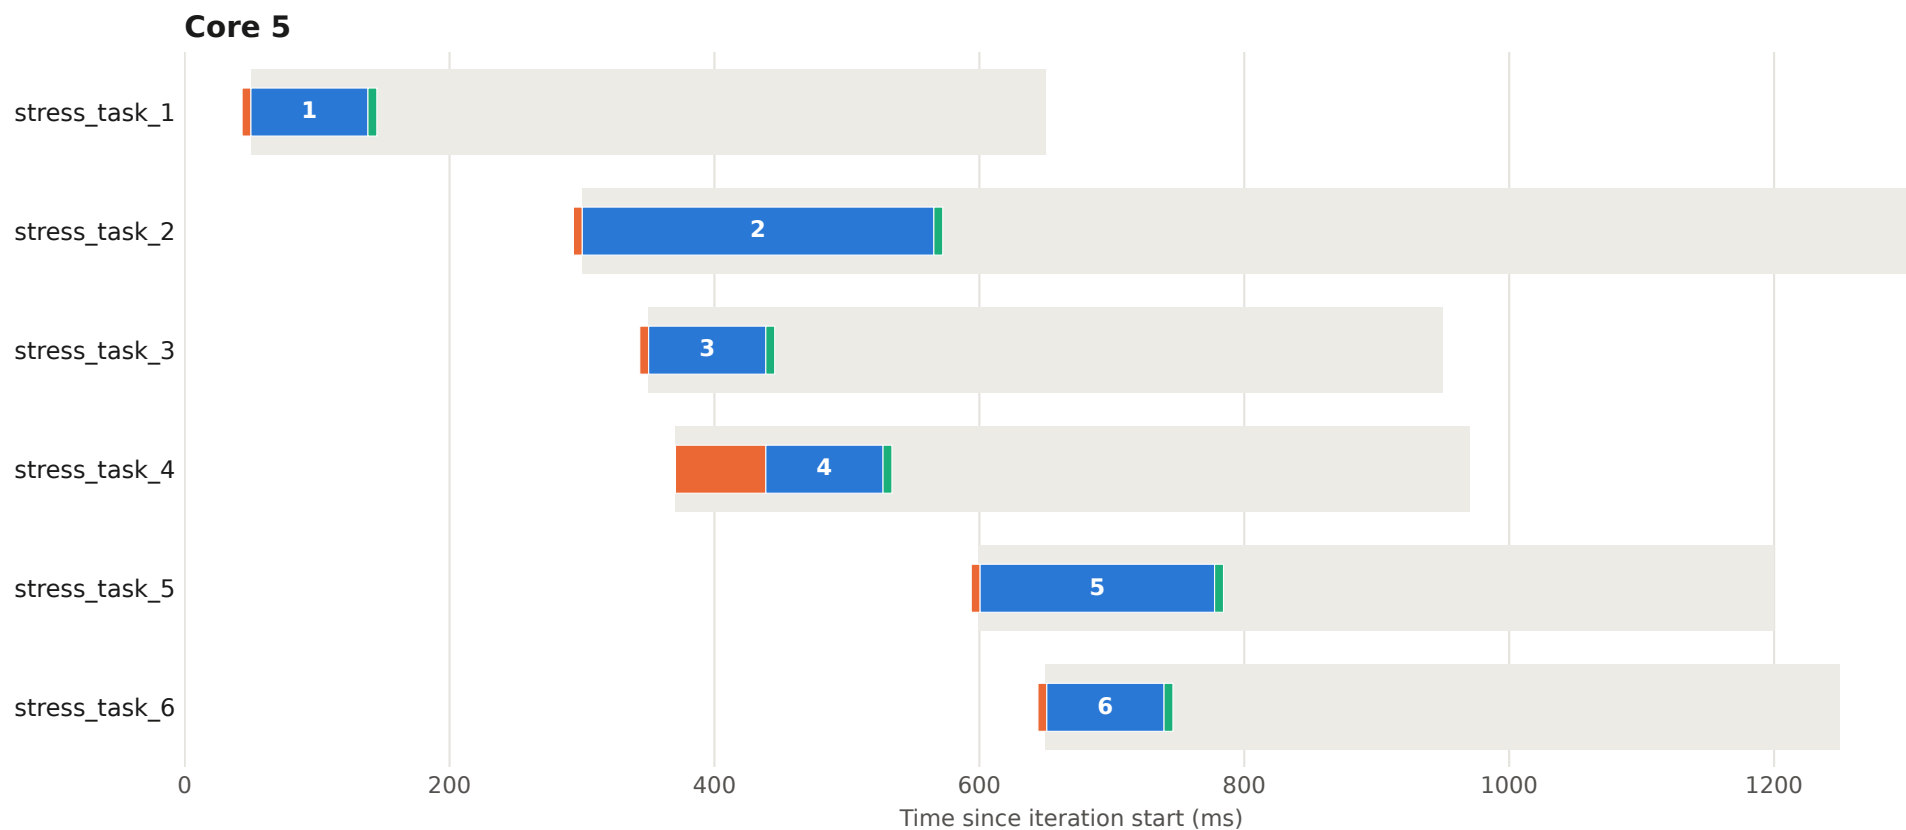


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 25 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

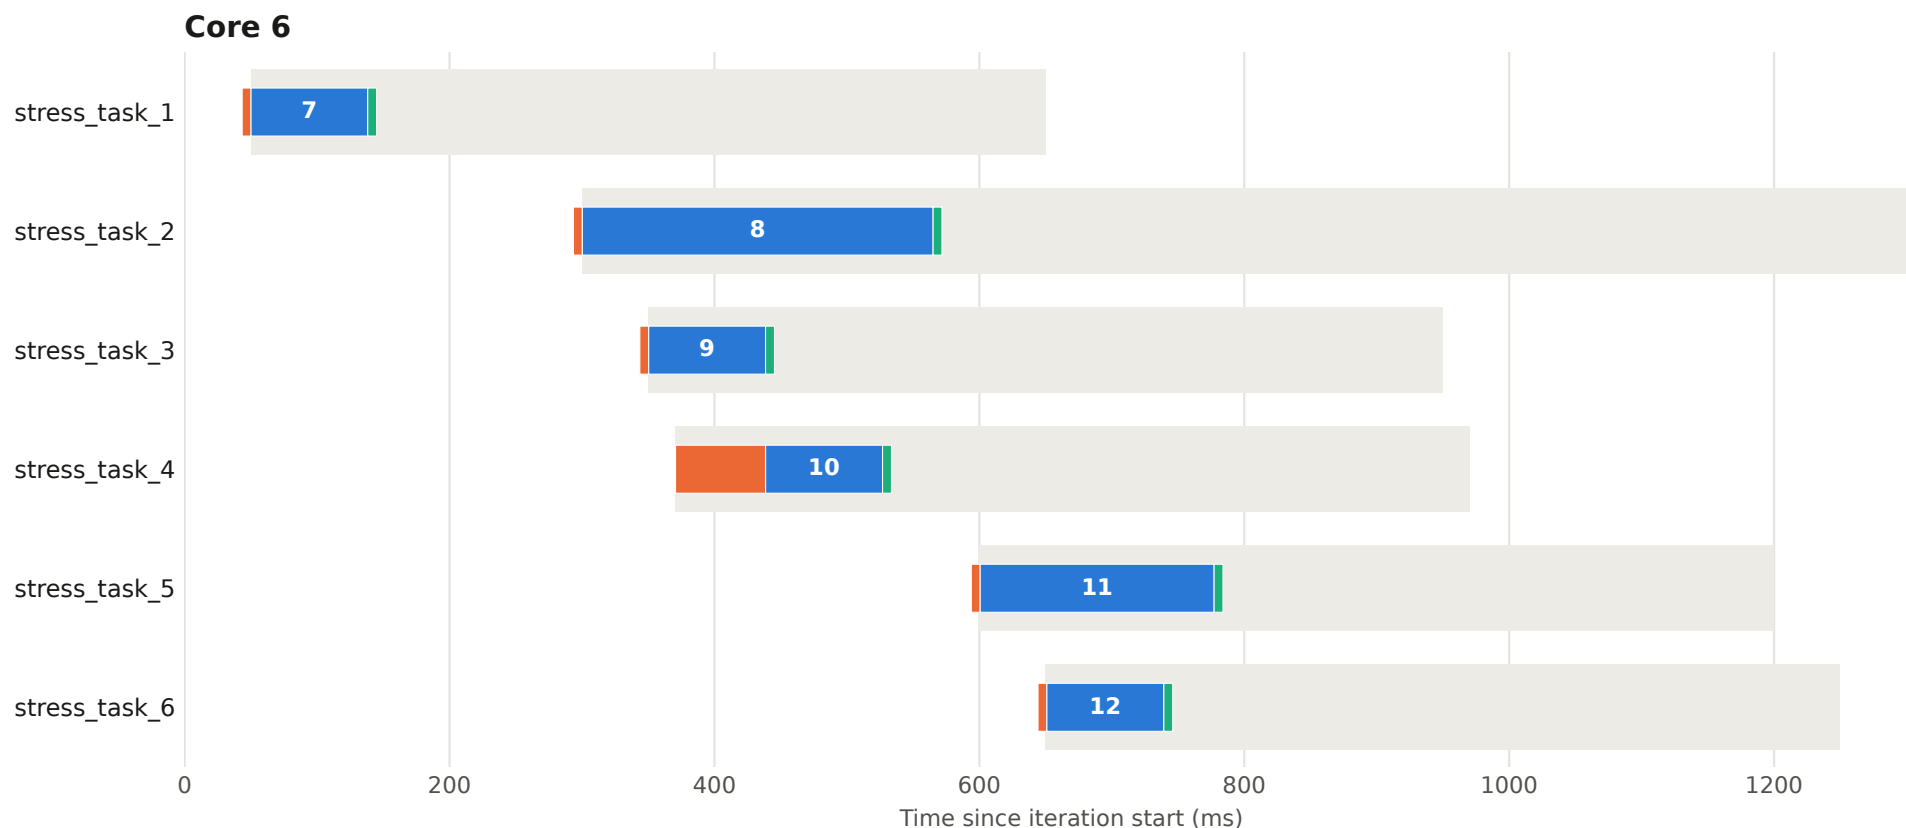


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 25 - core 7

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

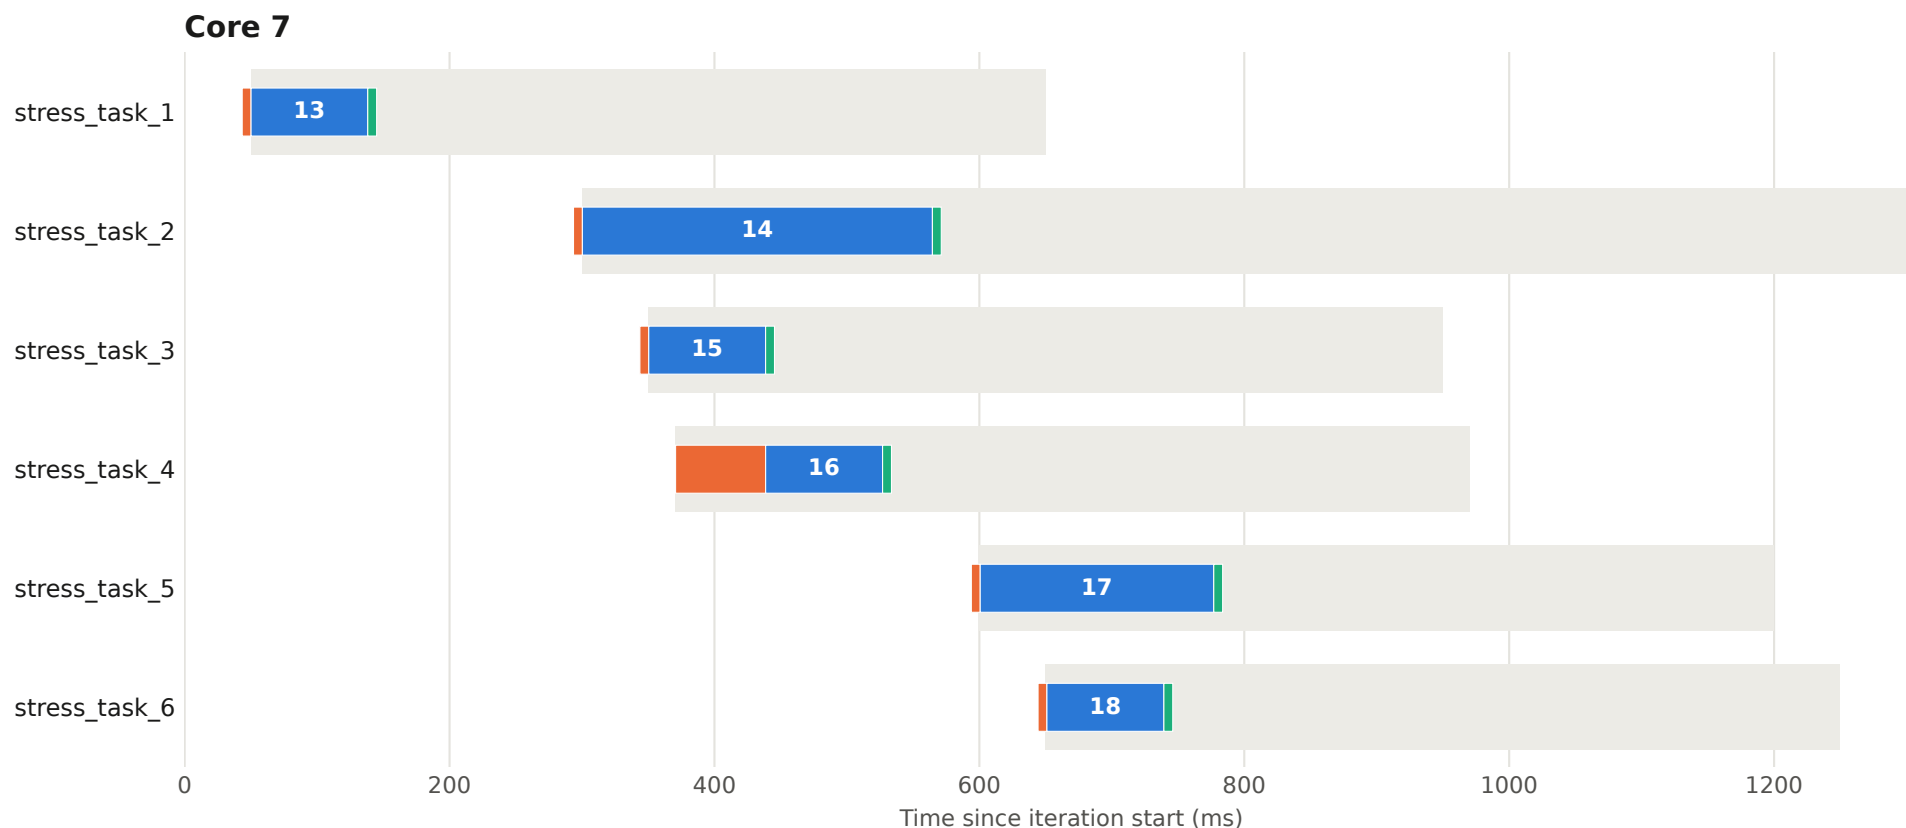

Execution plan - iteration 26 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

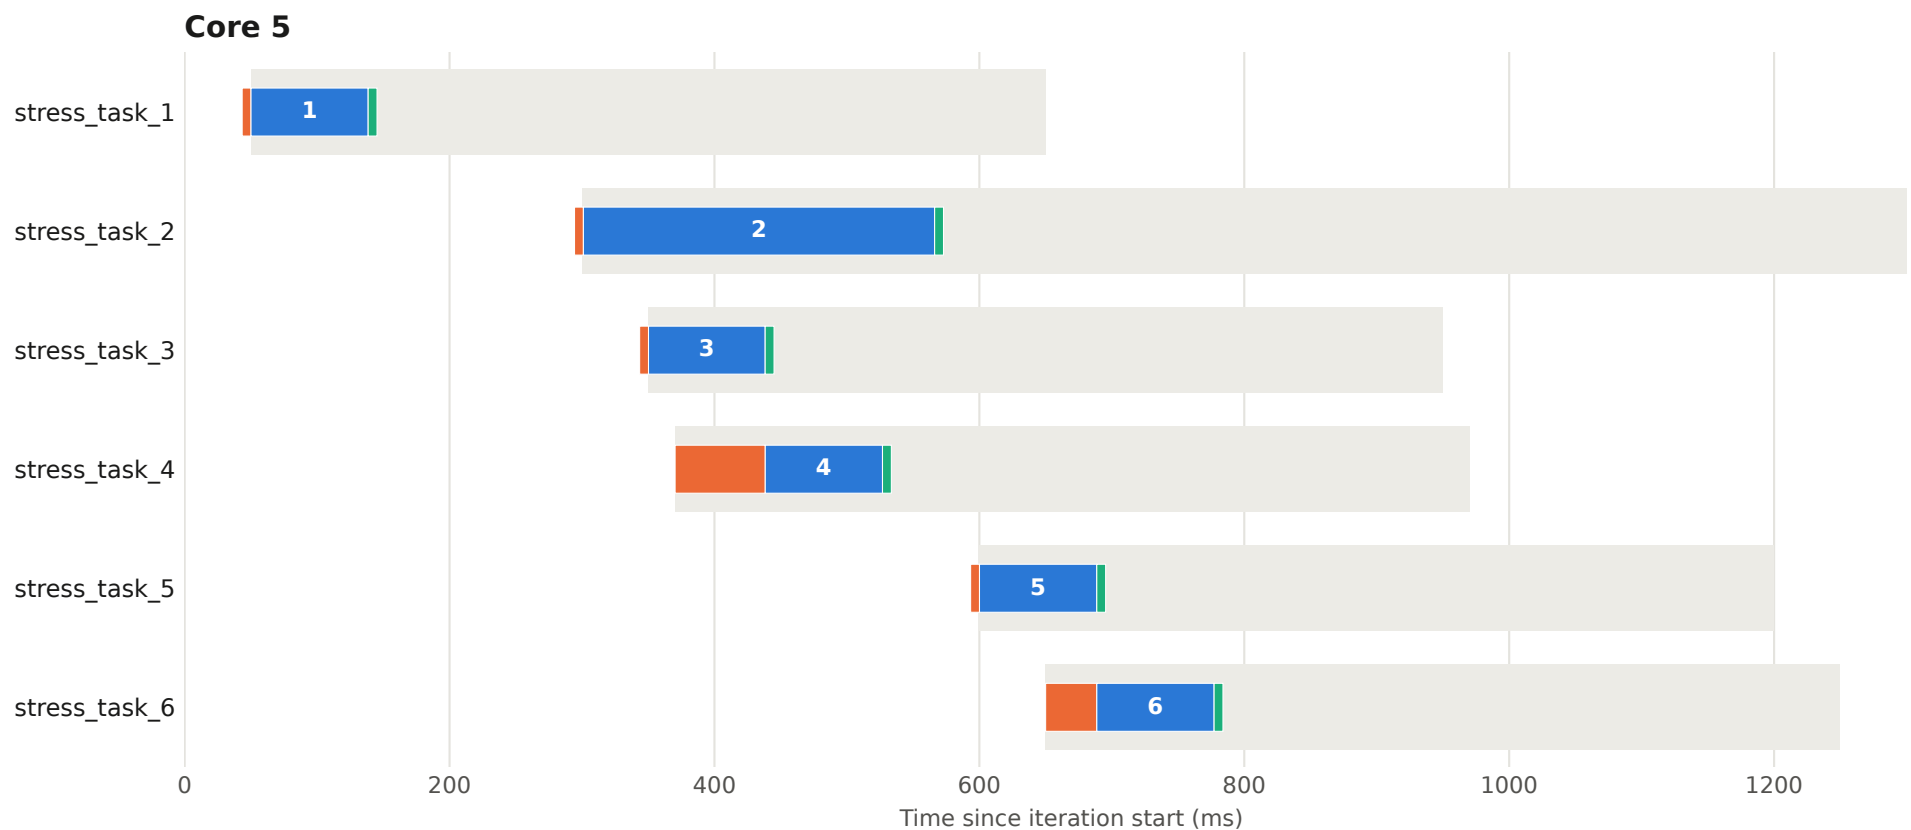


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 26 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

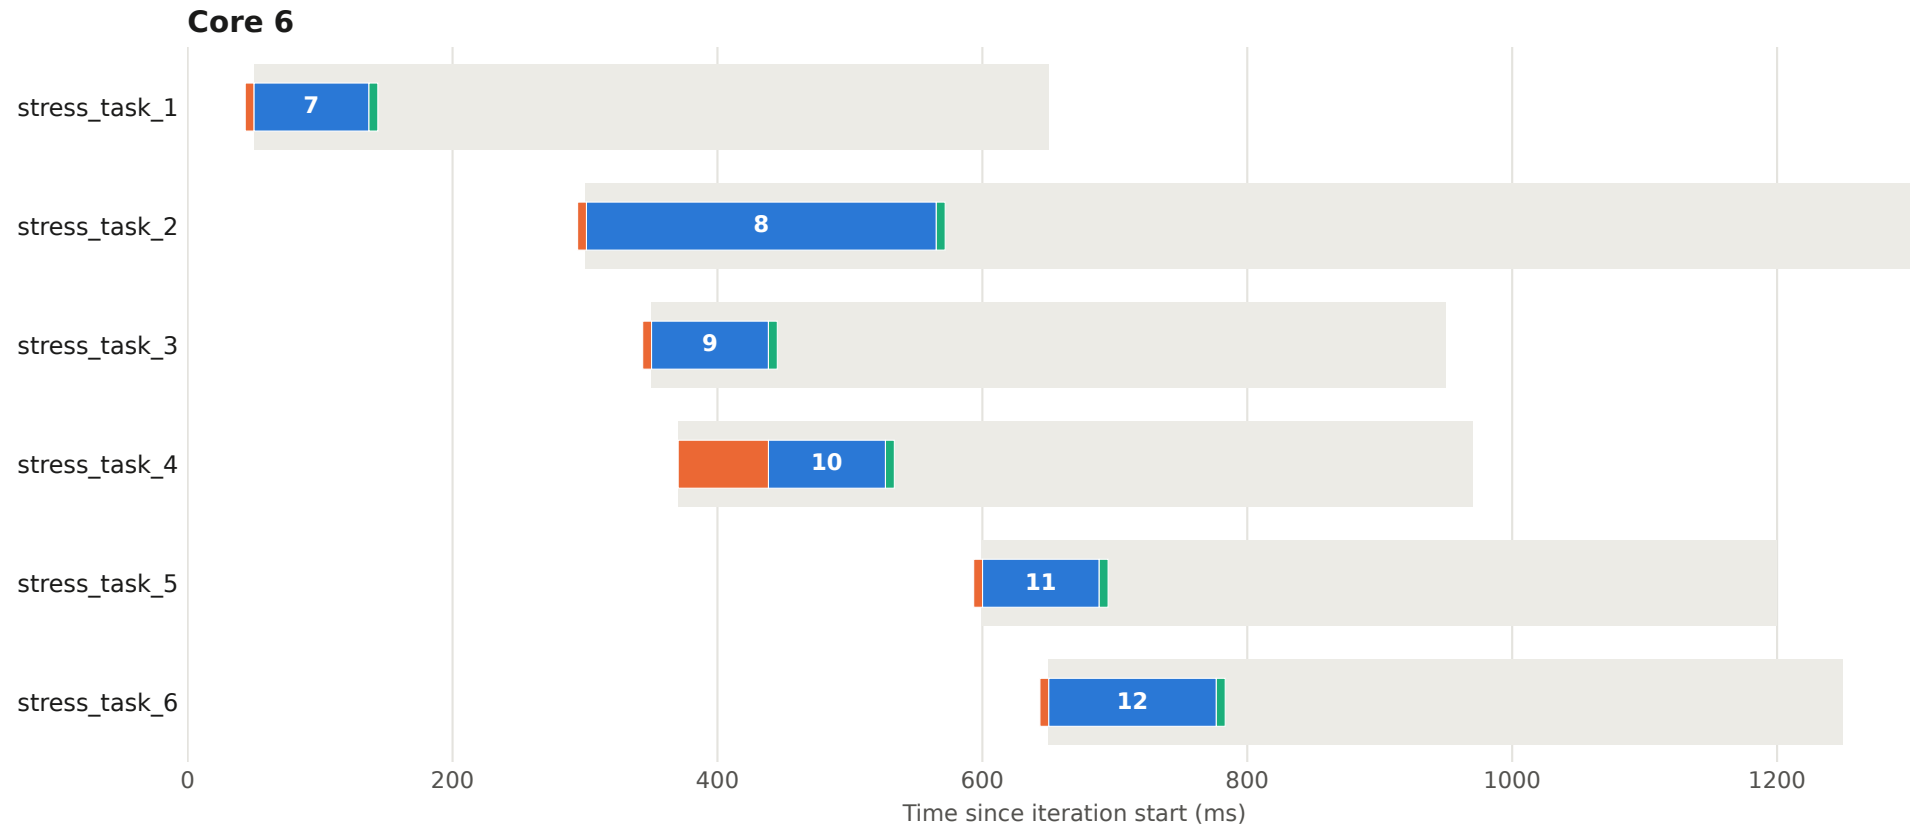


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 26 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

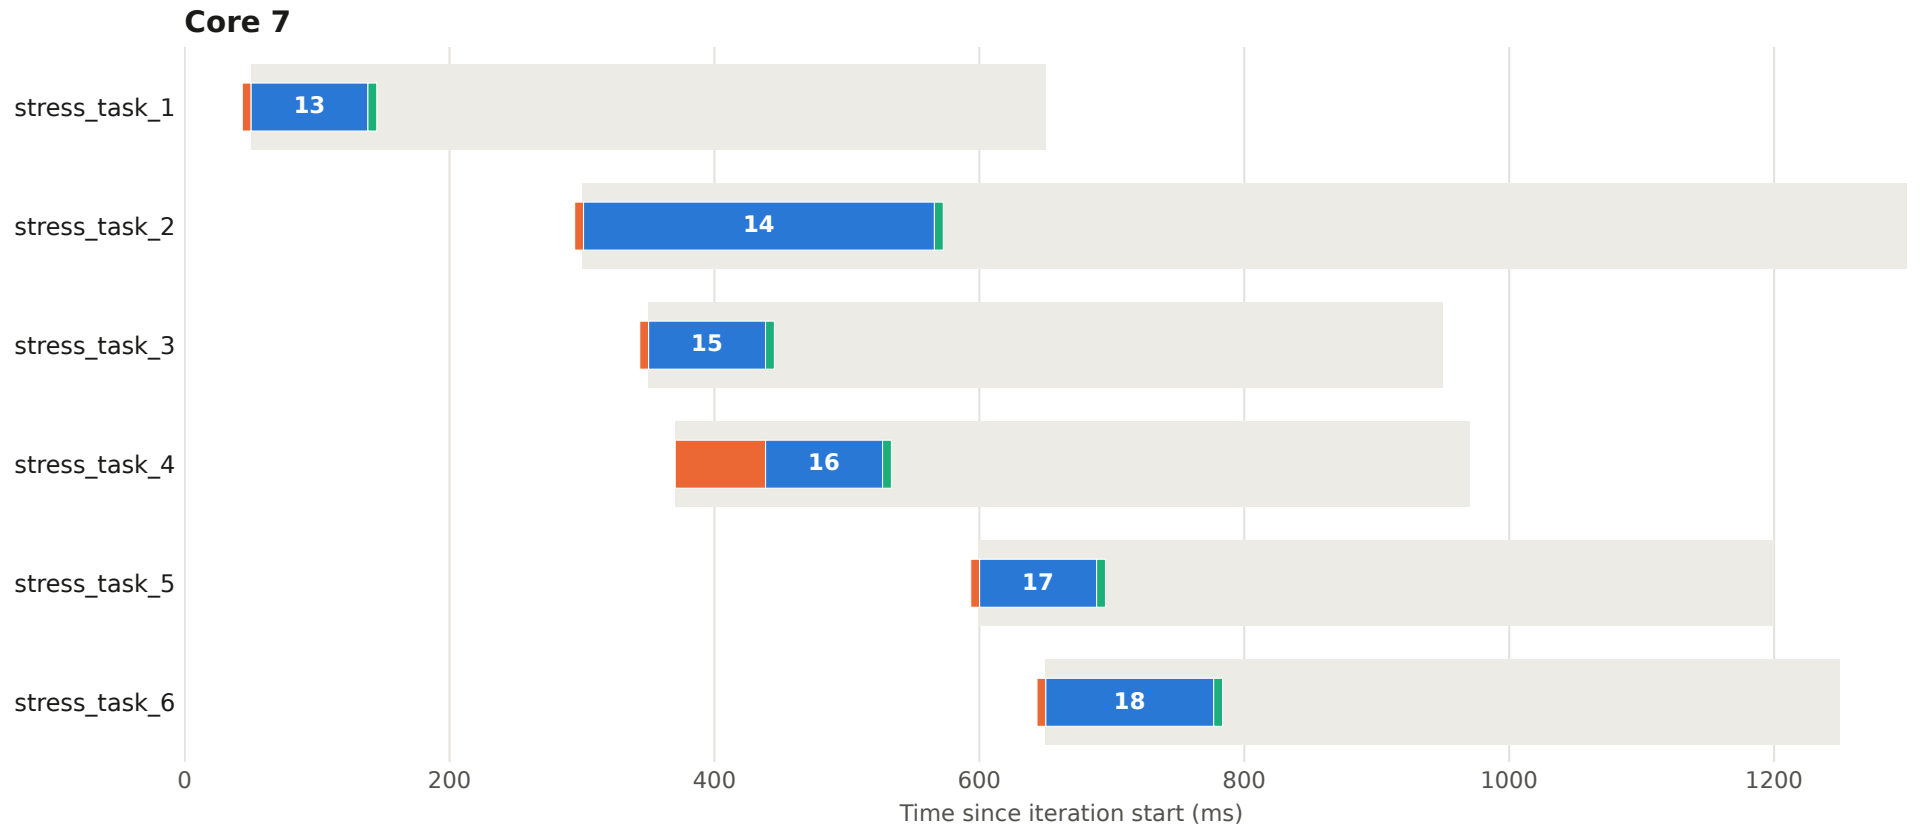


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 27 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

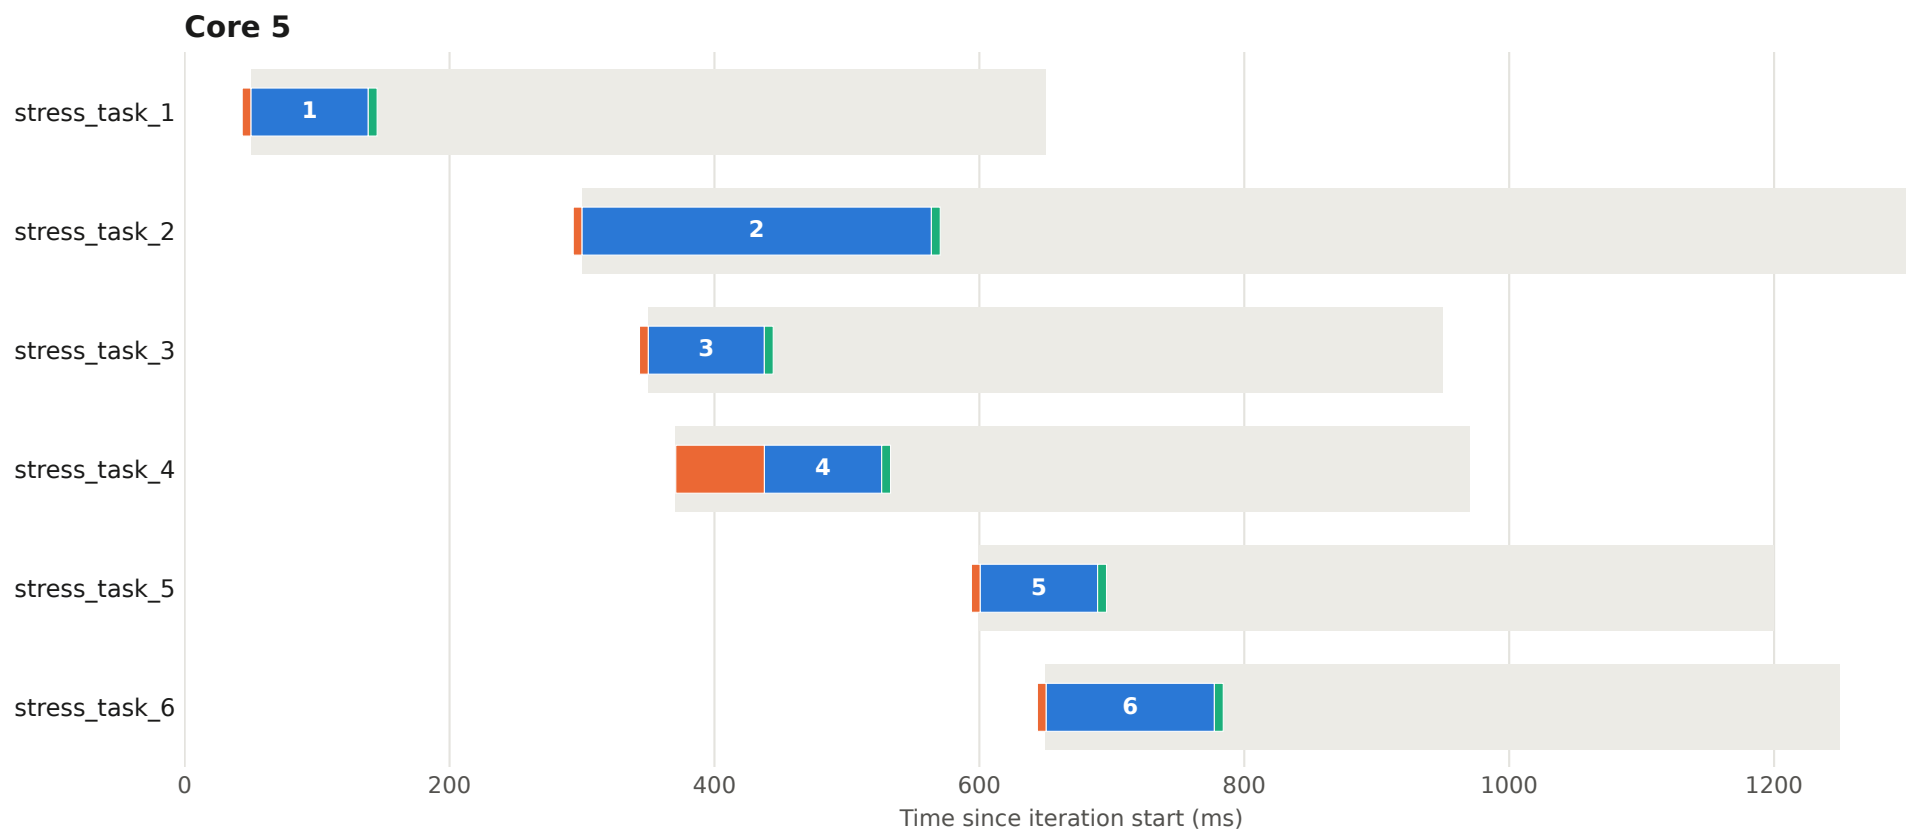


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 27 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

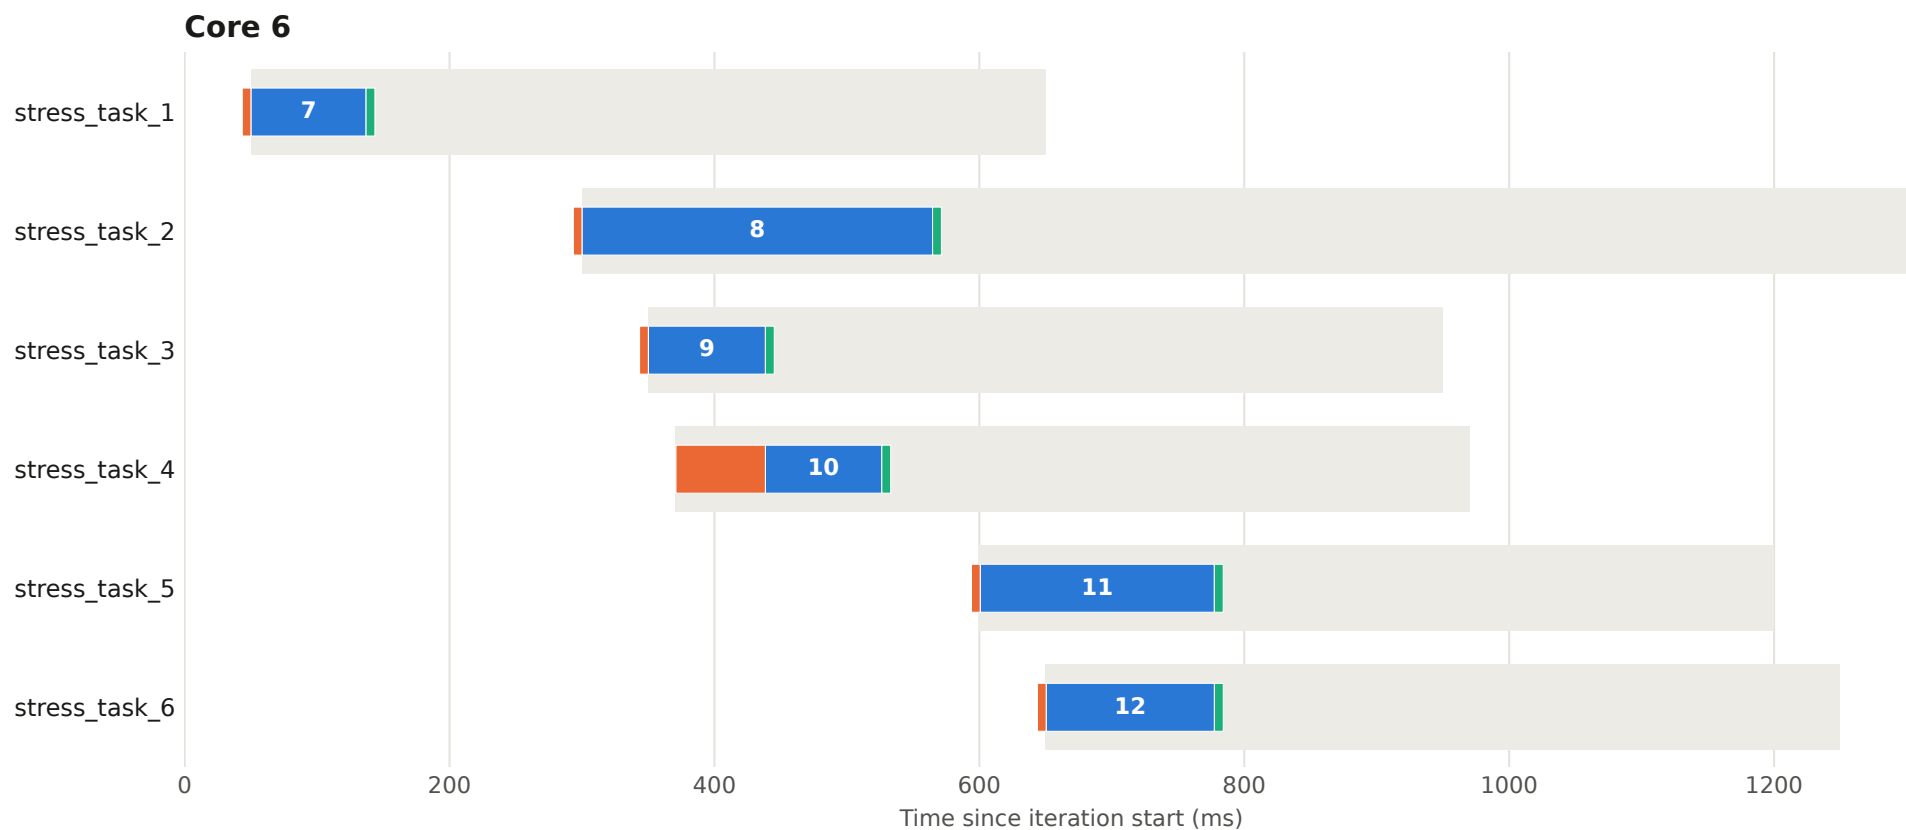


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 27 - core 7

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

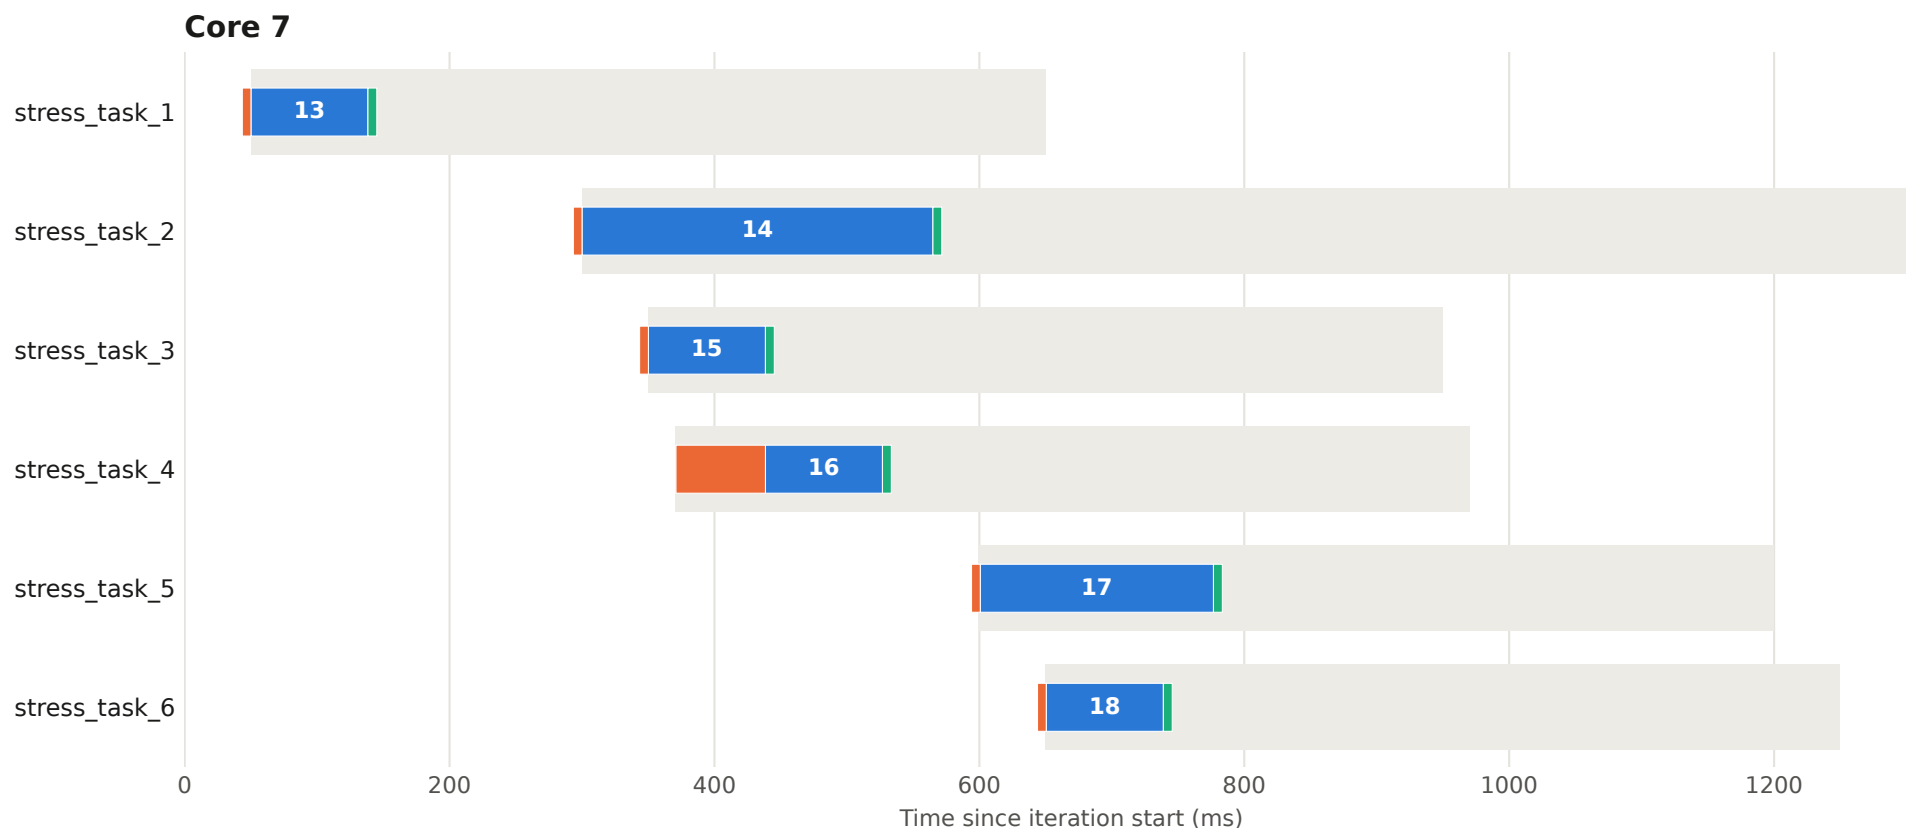

Execution plan - iteration 28 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

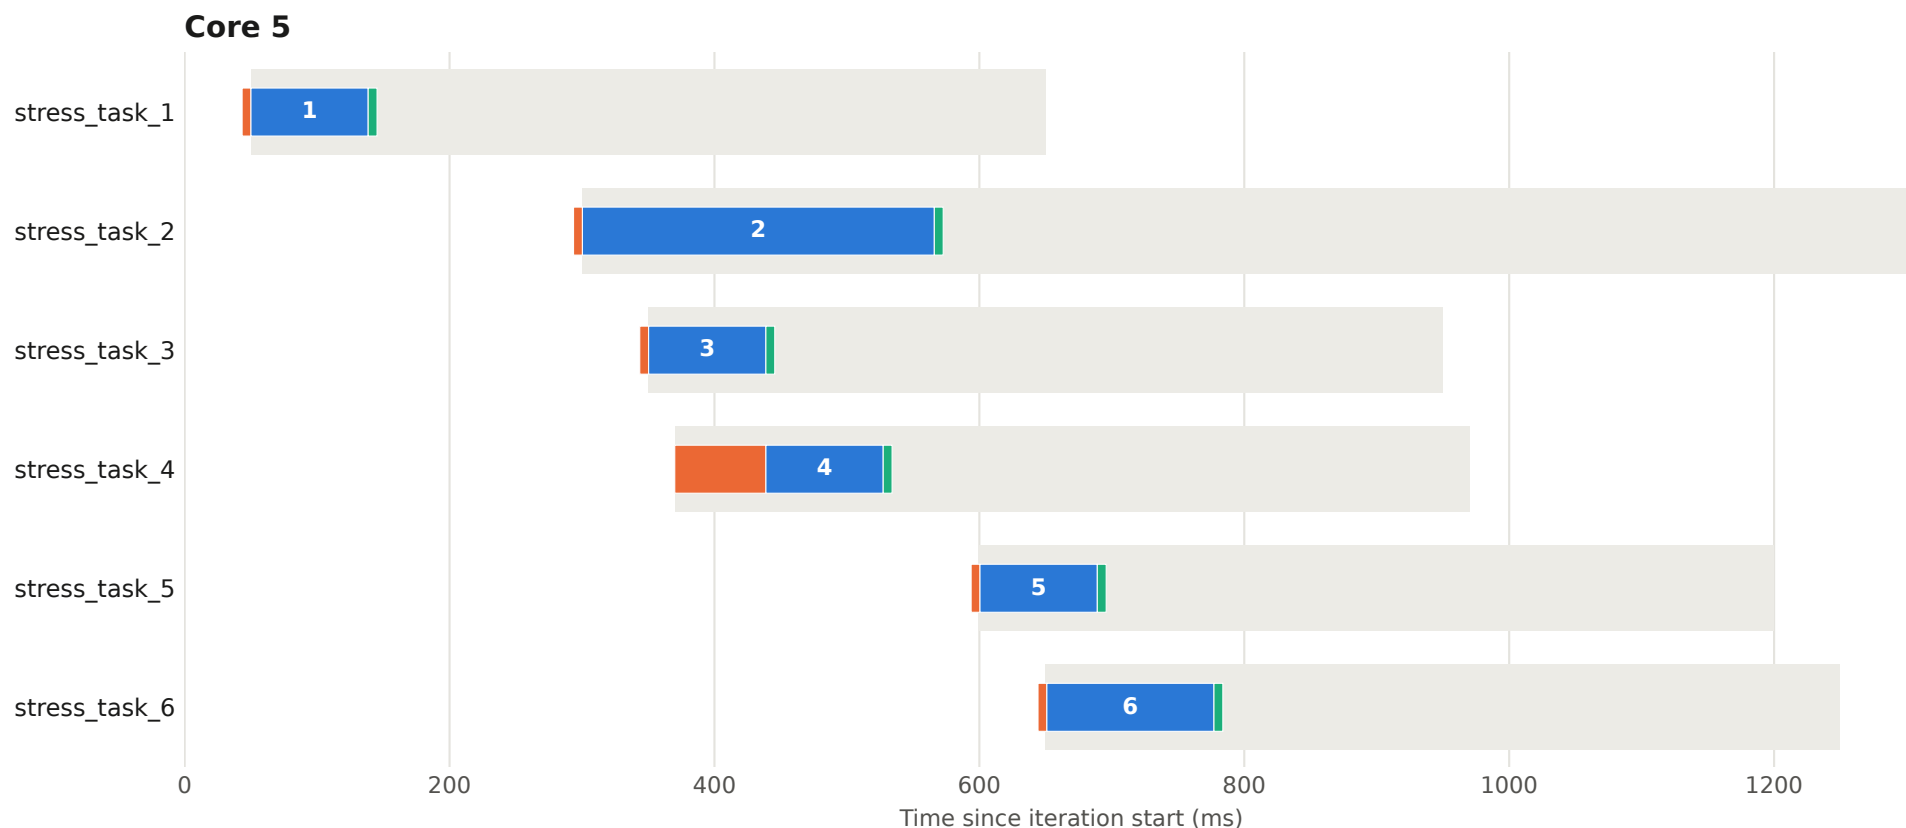


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 28 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

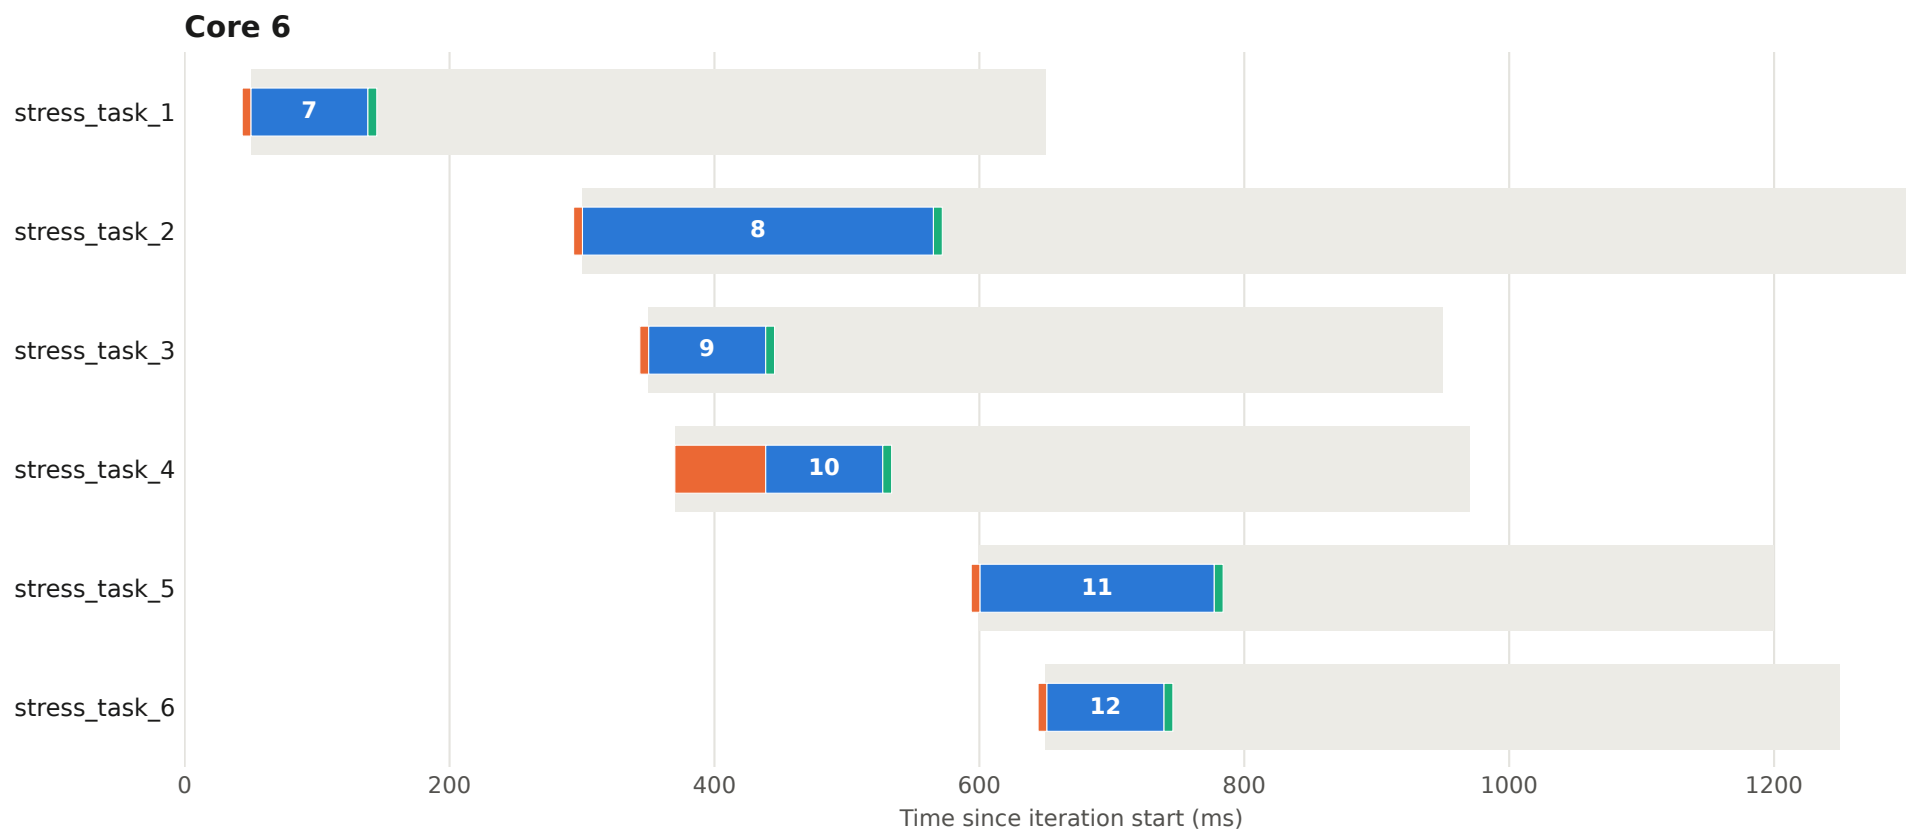


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 28 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

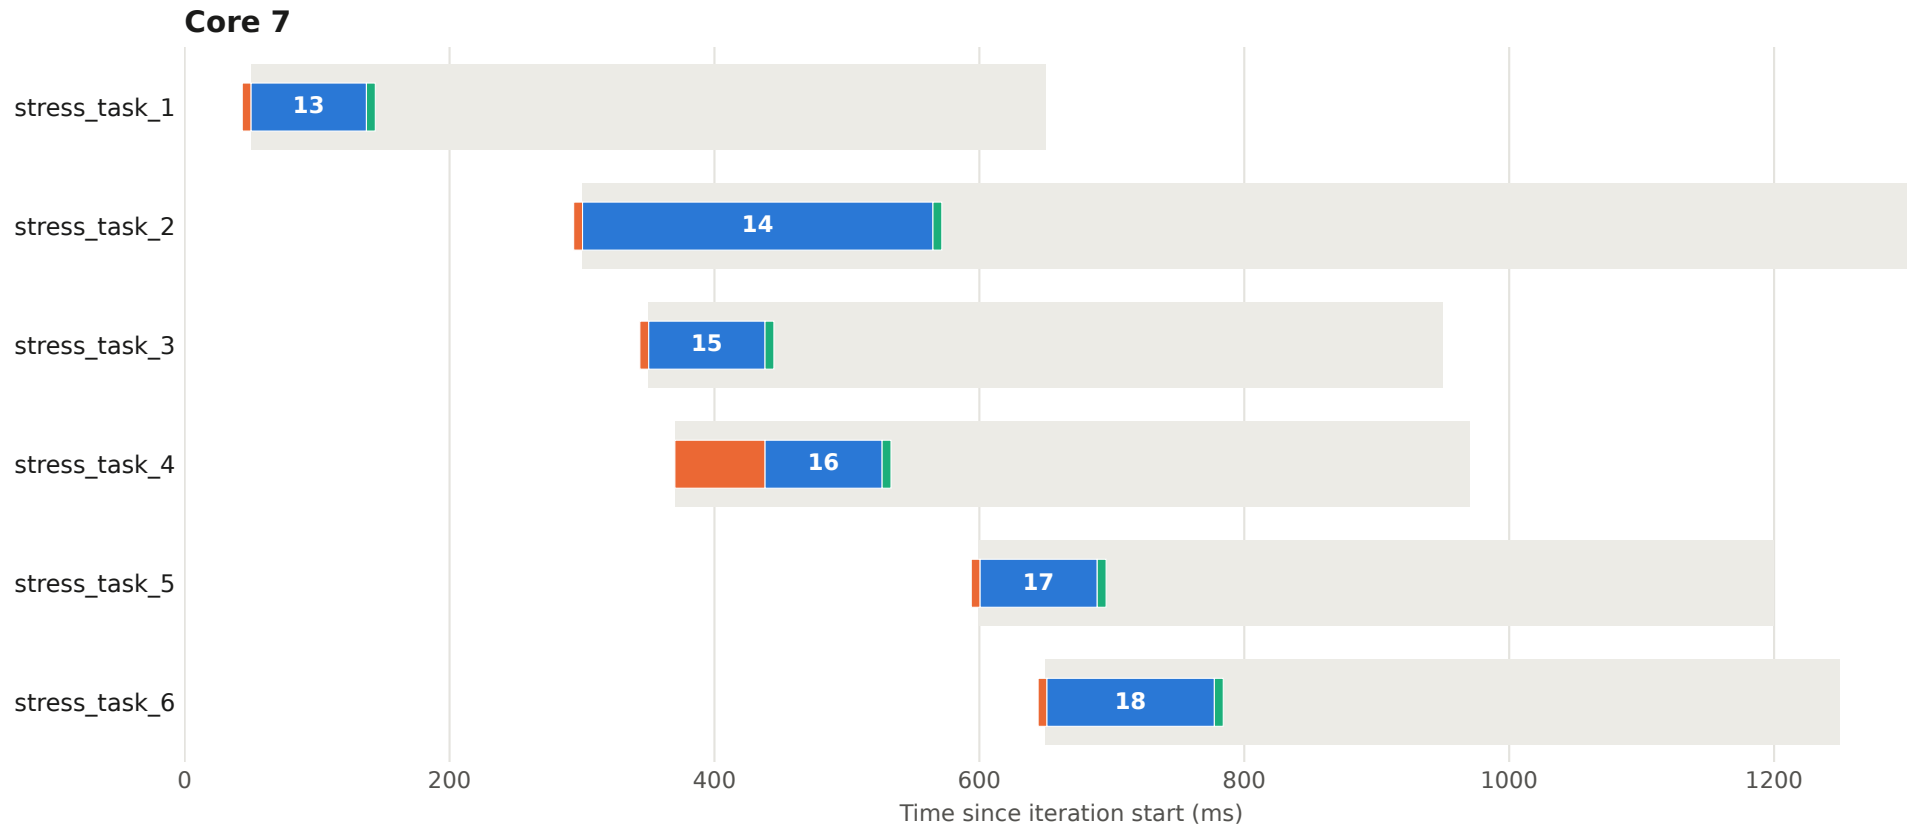


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 29 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

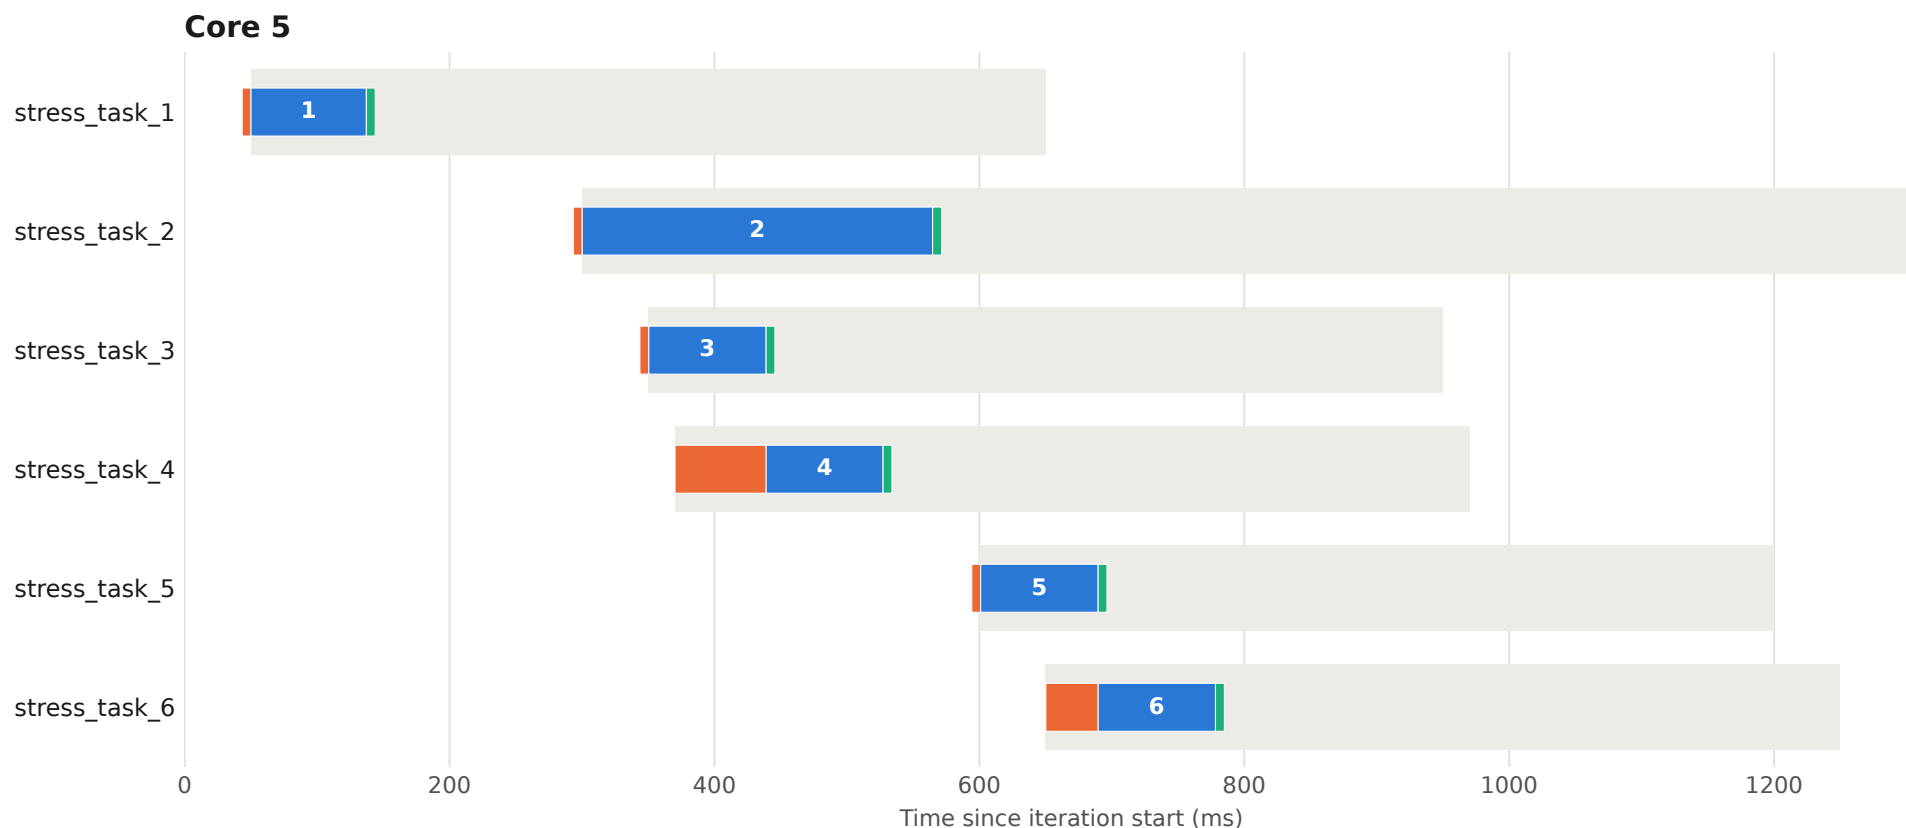


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 29 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

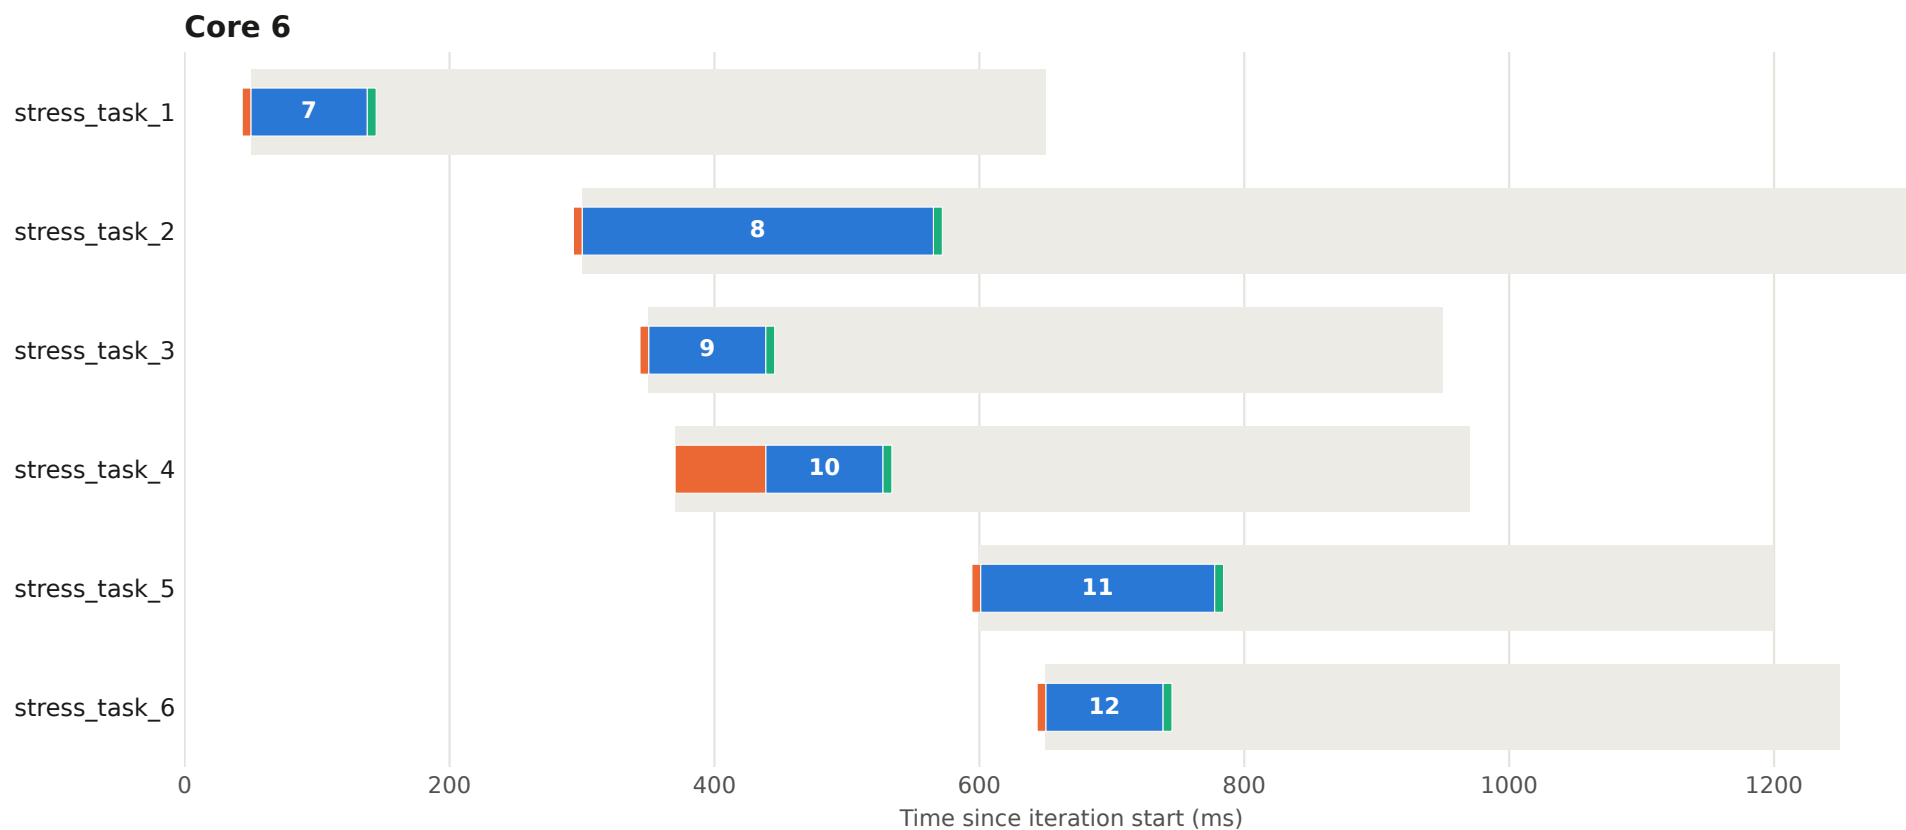


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 29 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

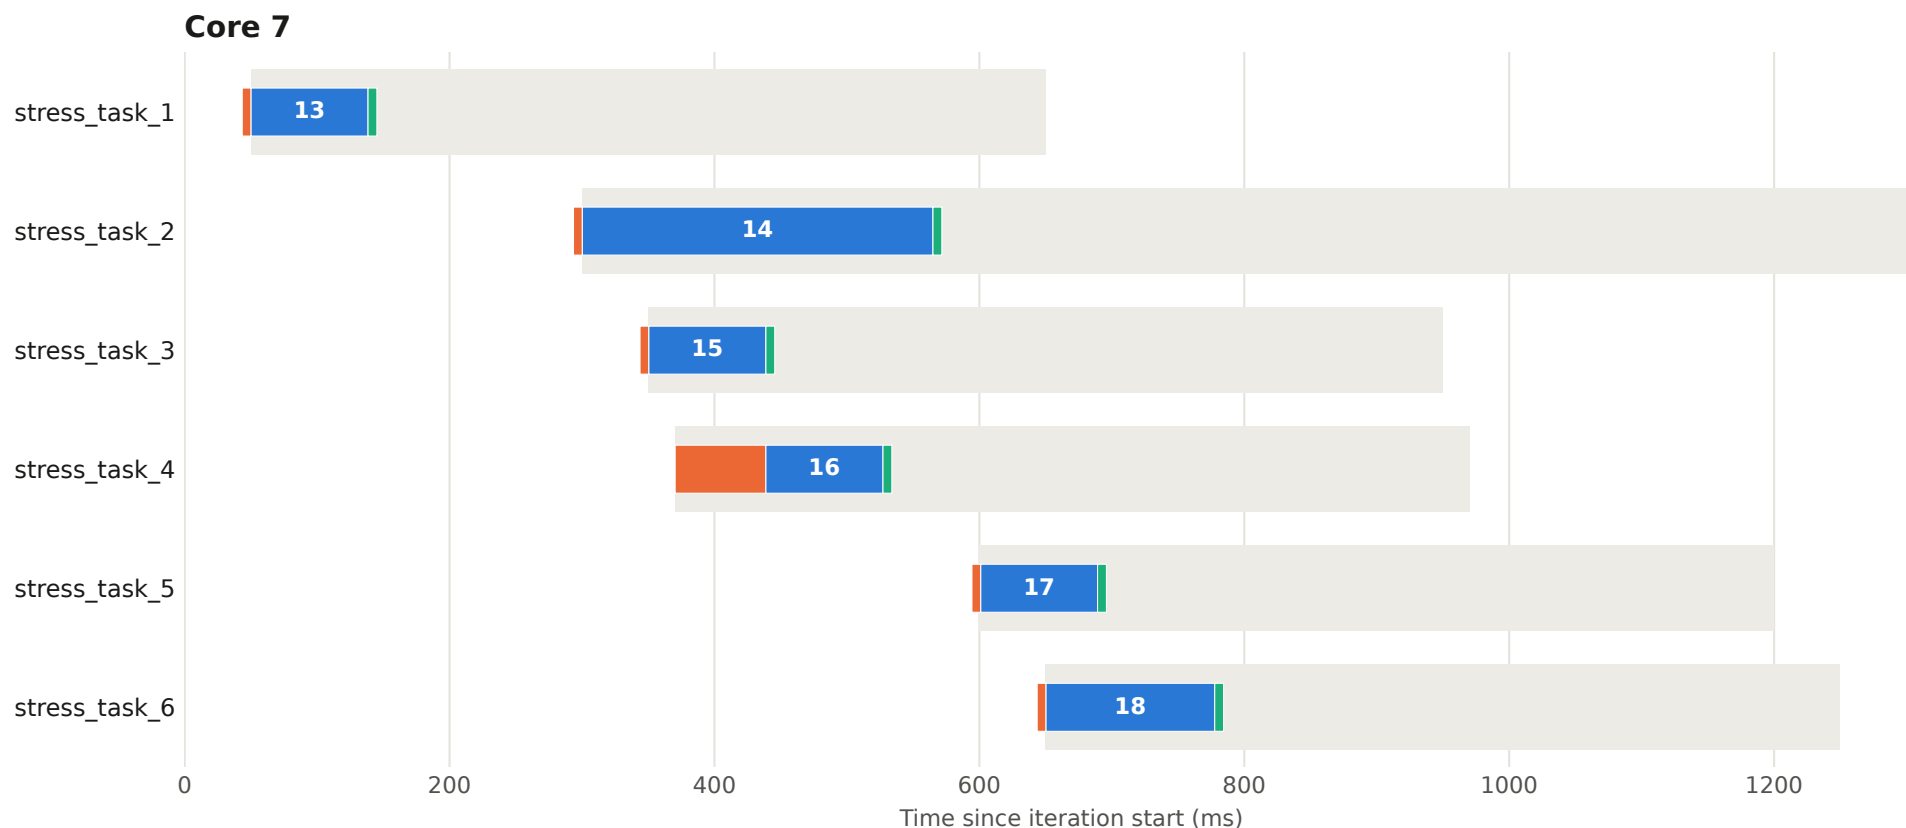


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 30 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

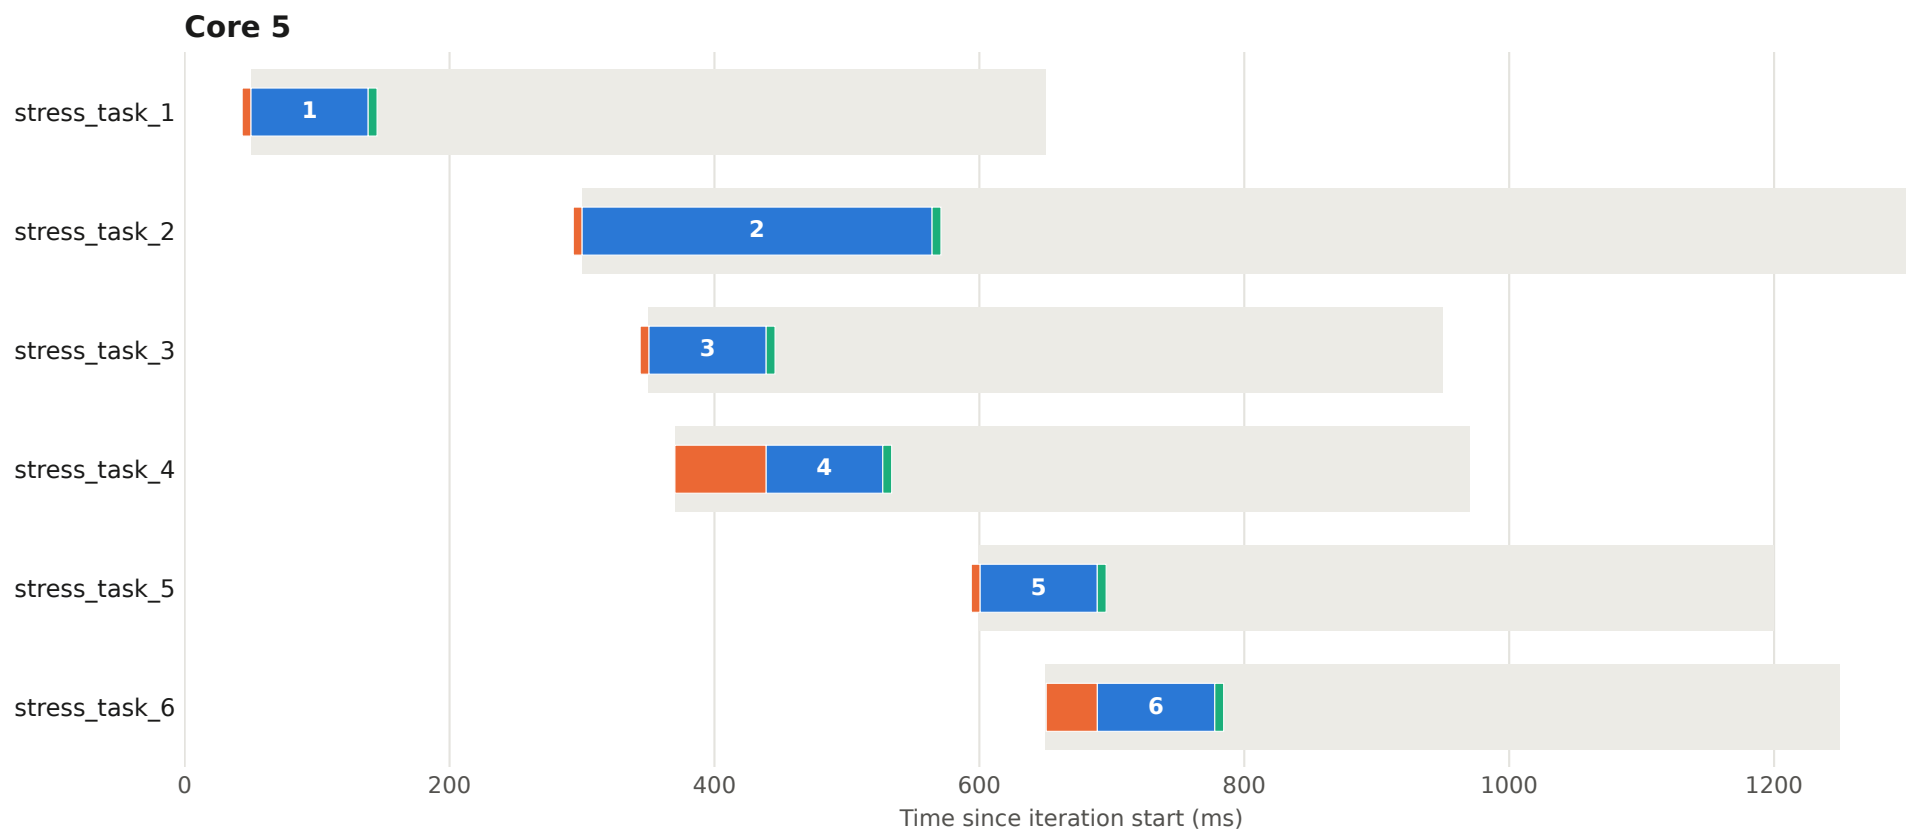


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 30 - core 6

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

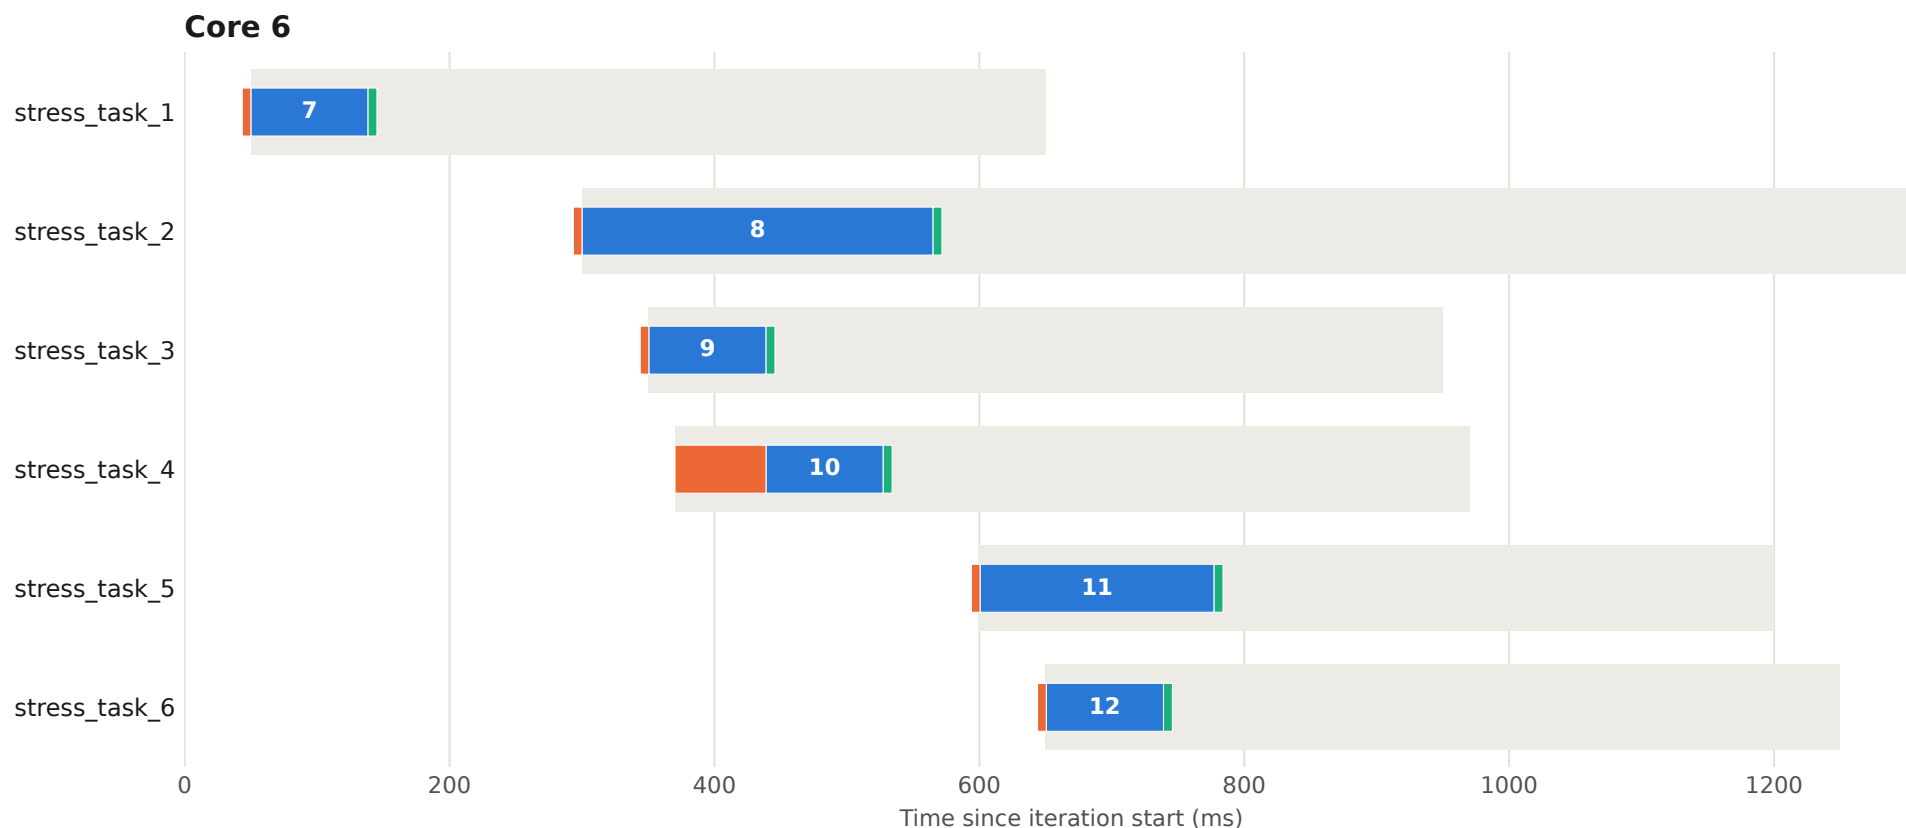

Execution plan - iteration 30 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

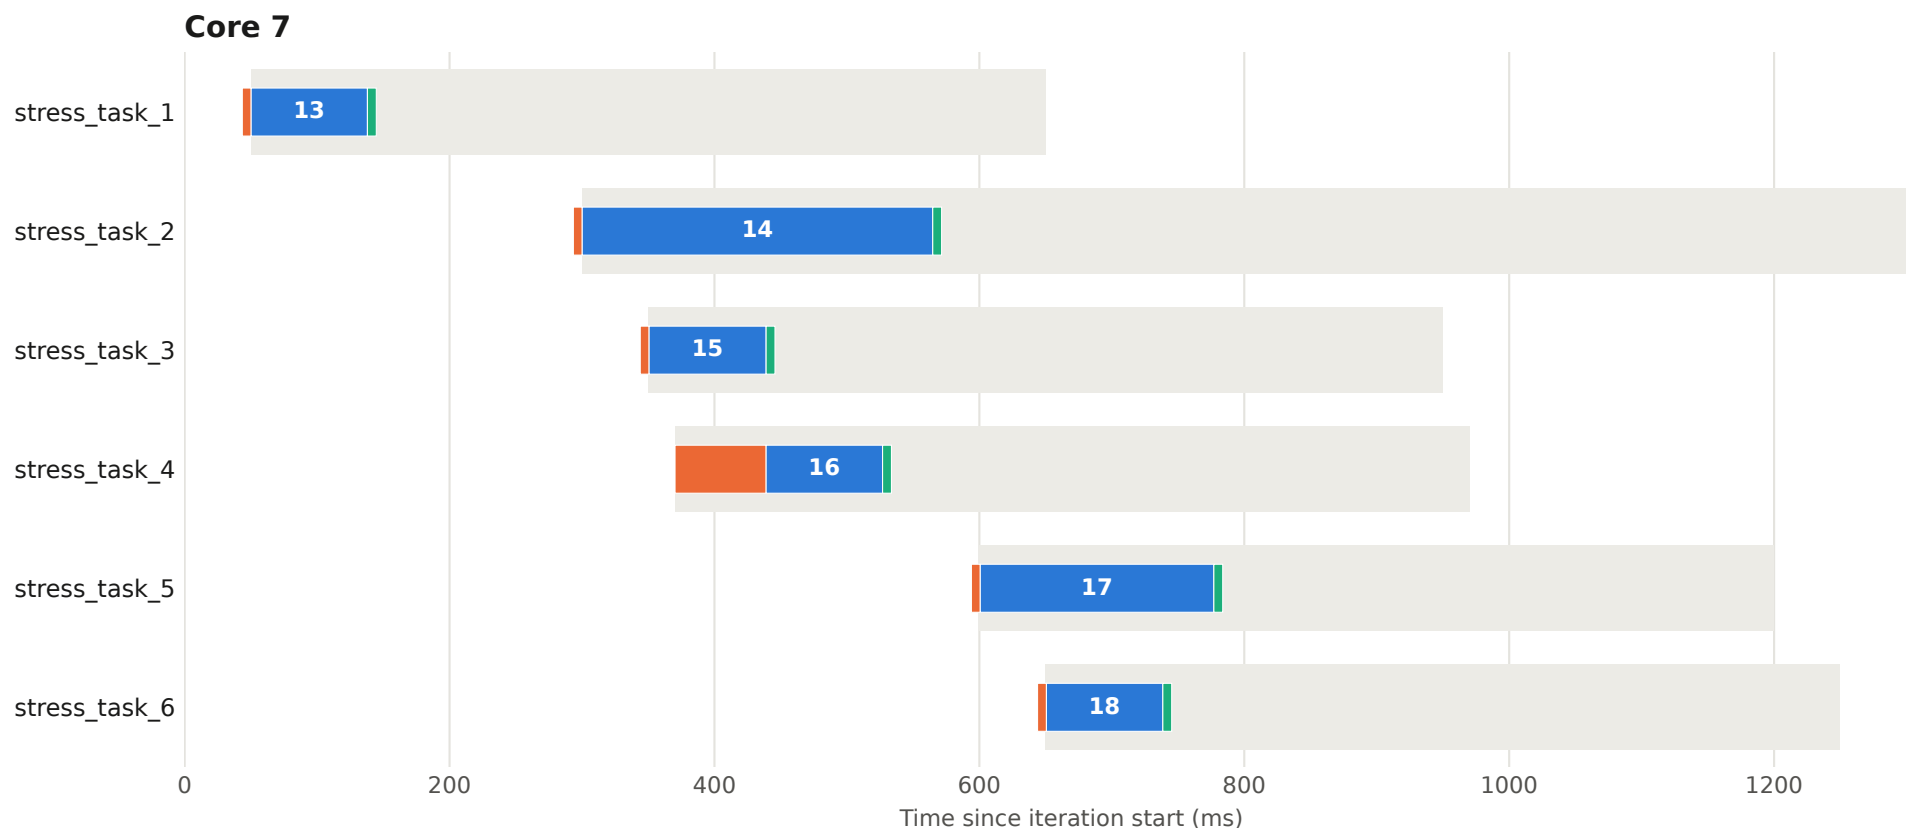


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 31 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

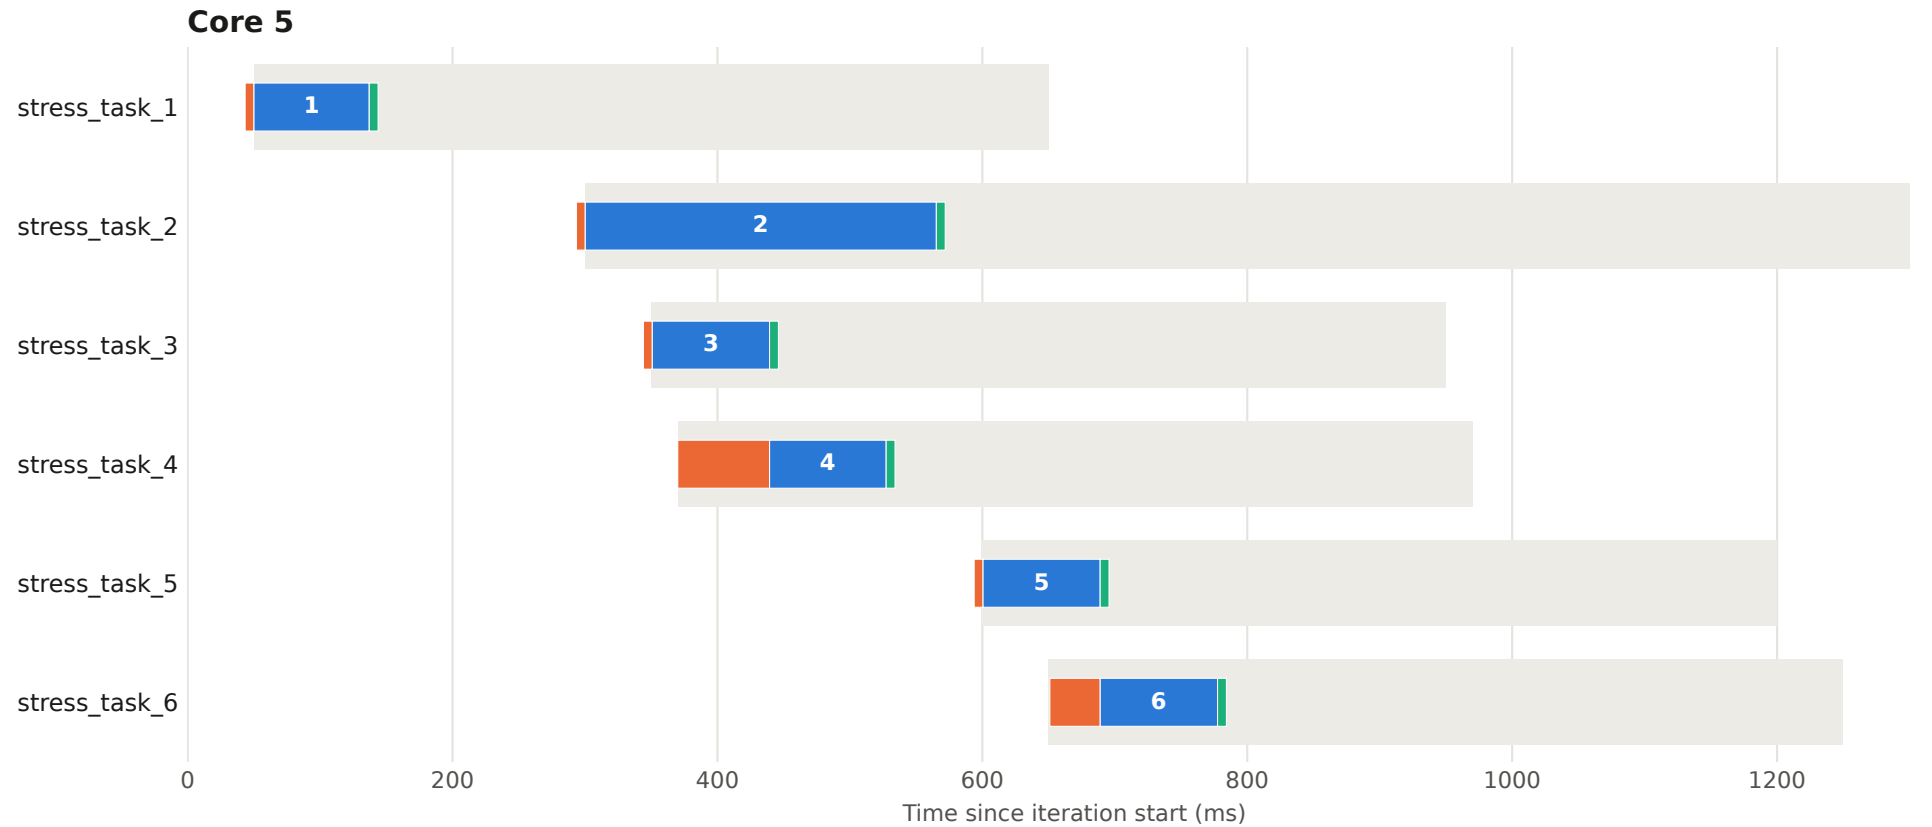


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 31 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

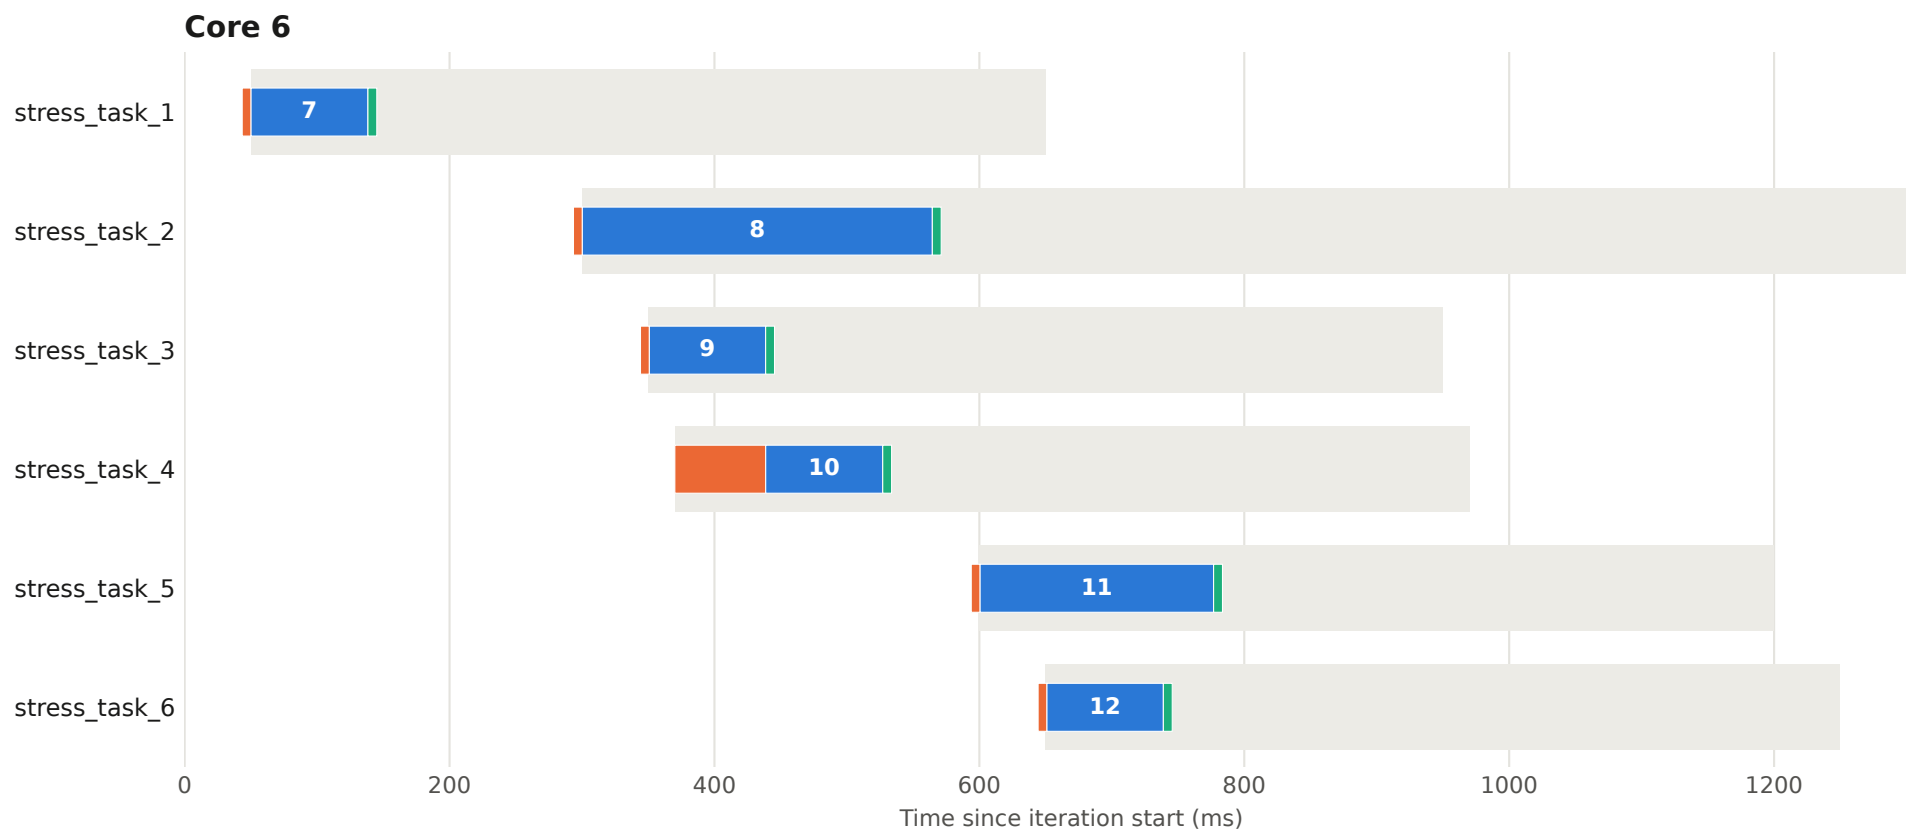


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 31 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

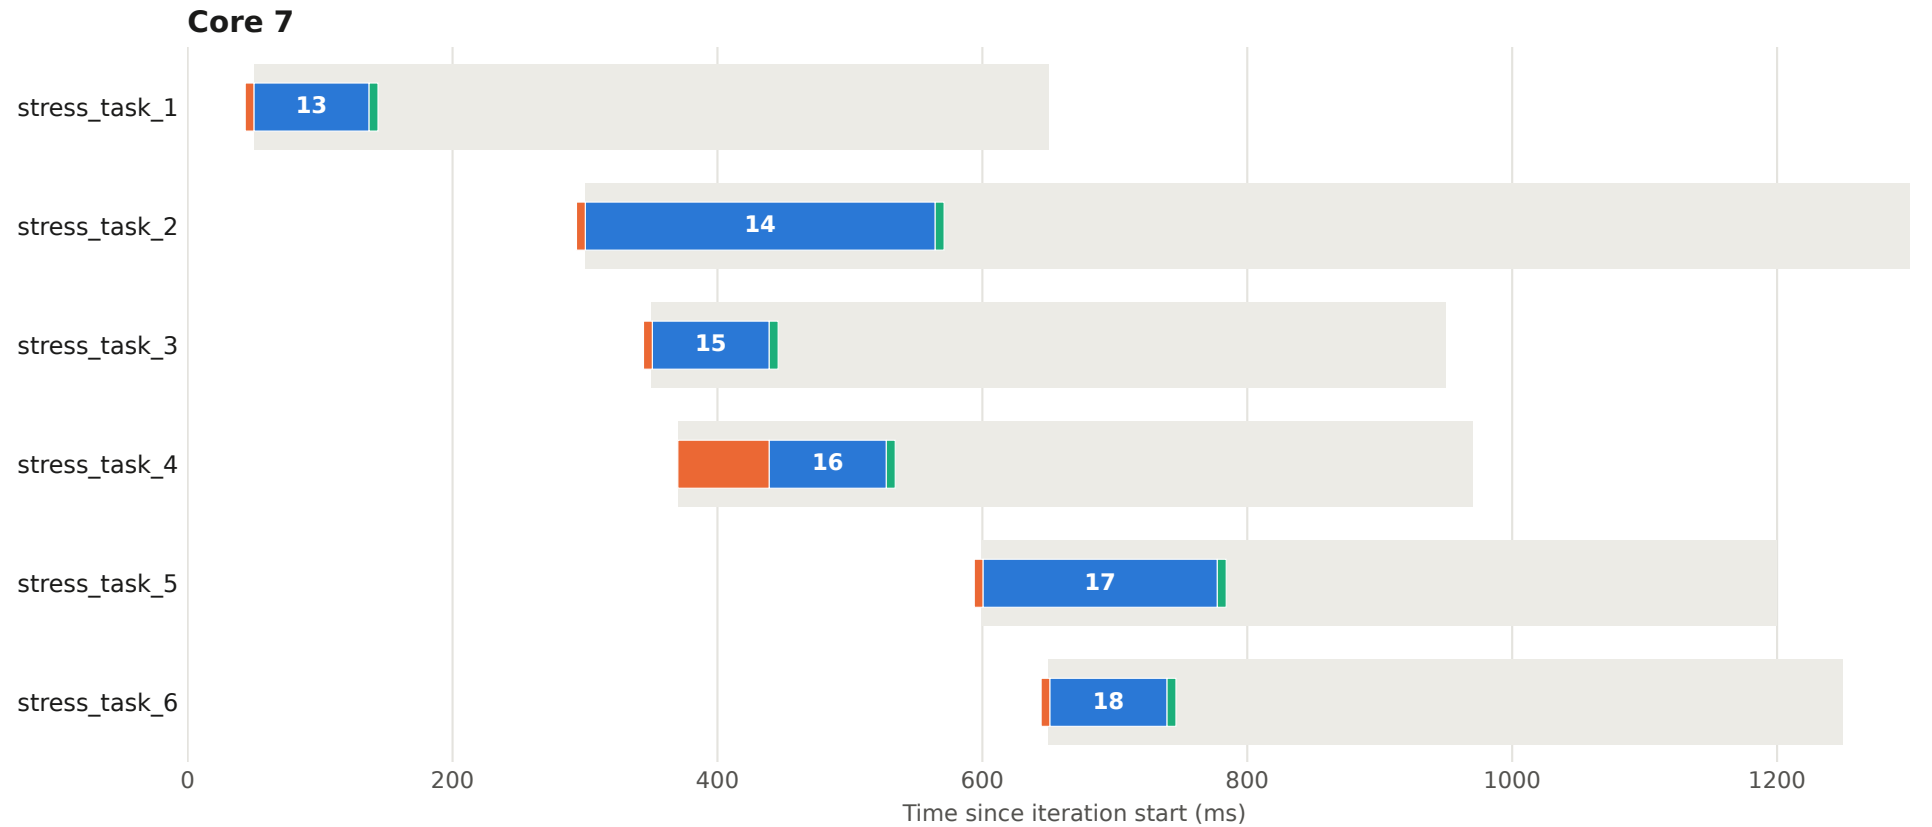


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 32 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

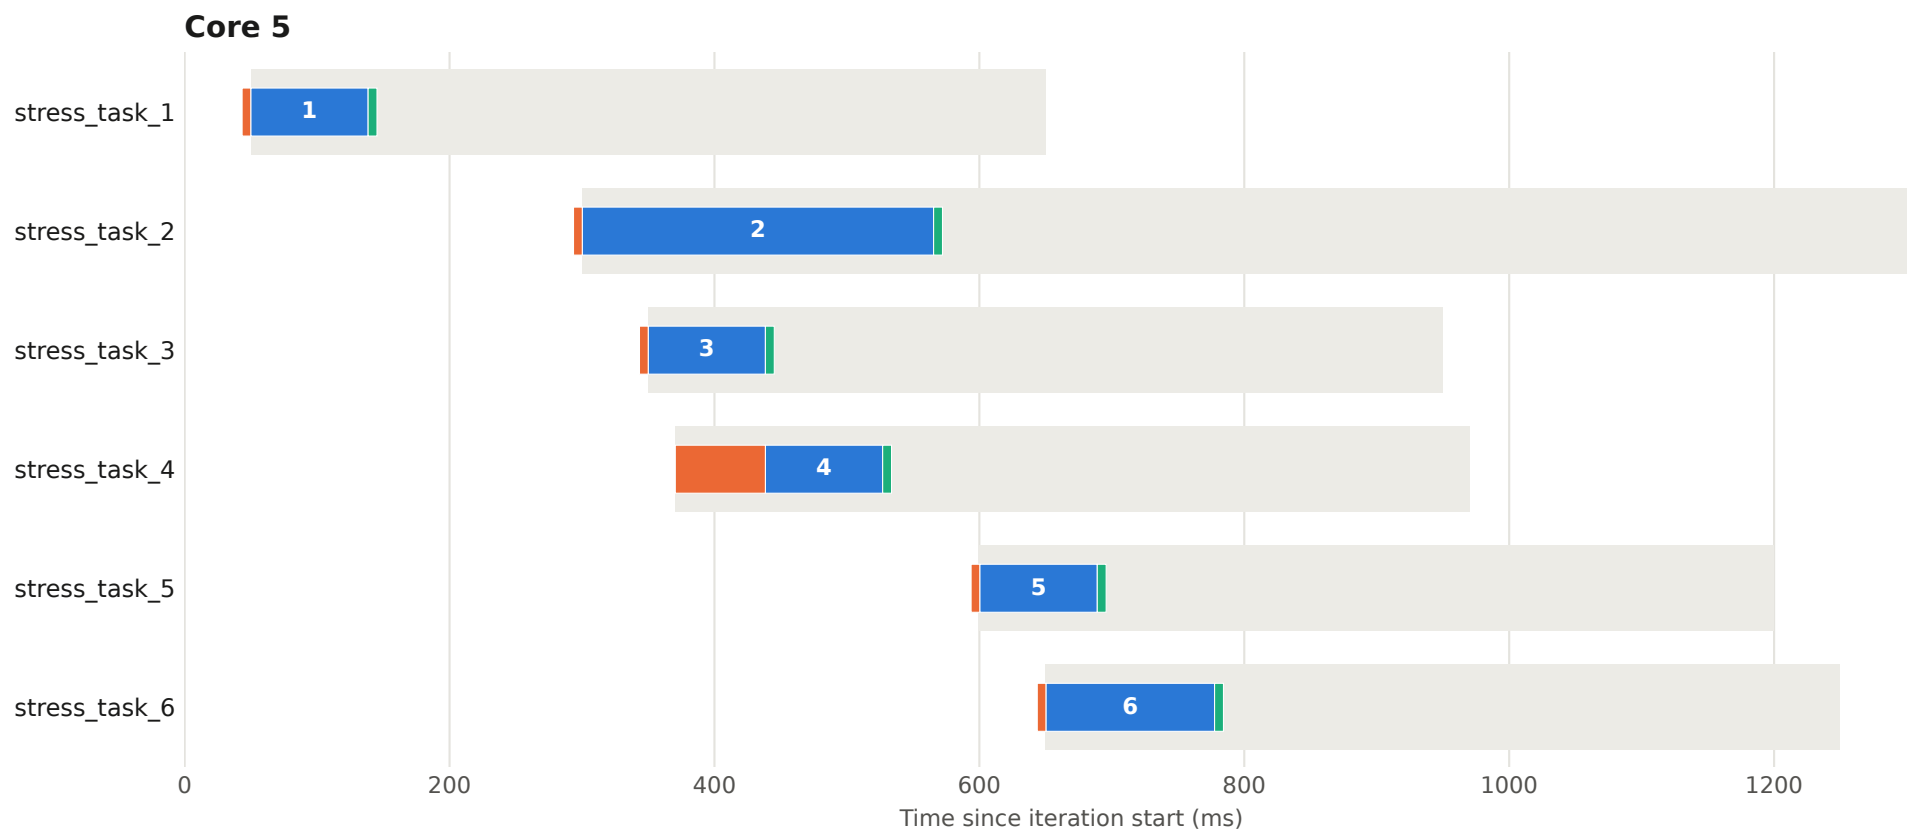


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 32 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

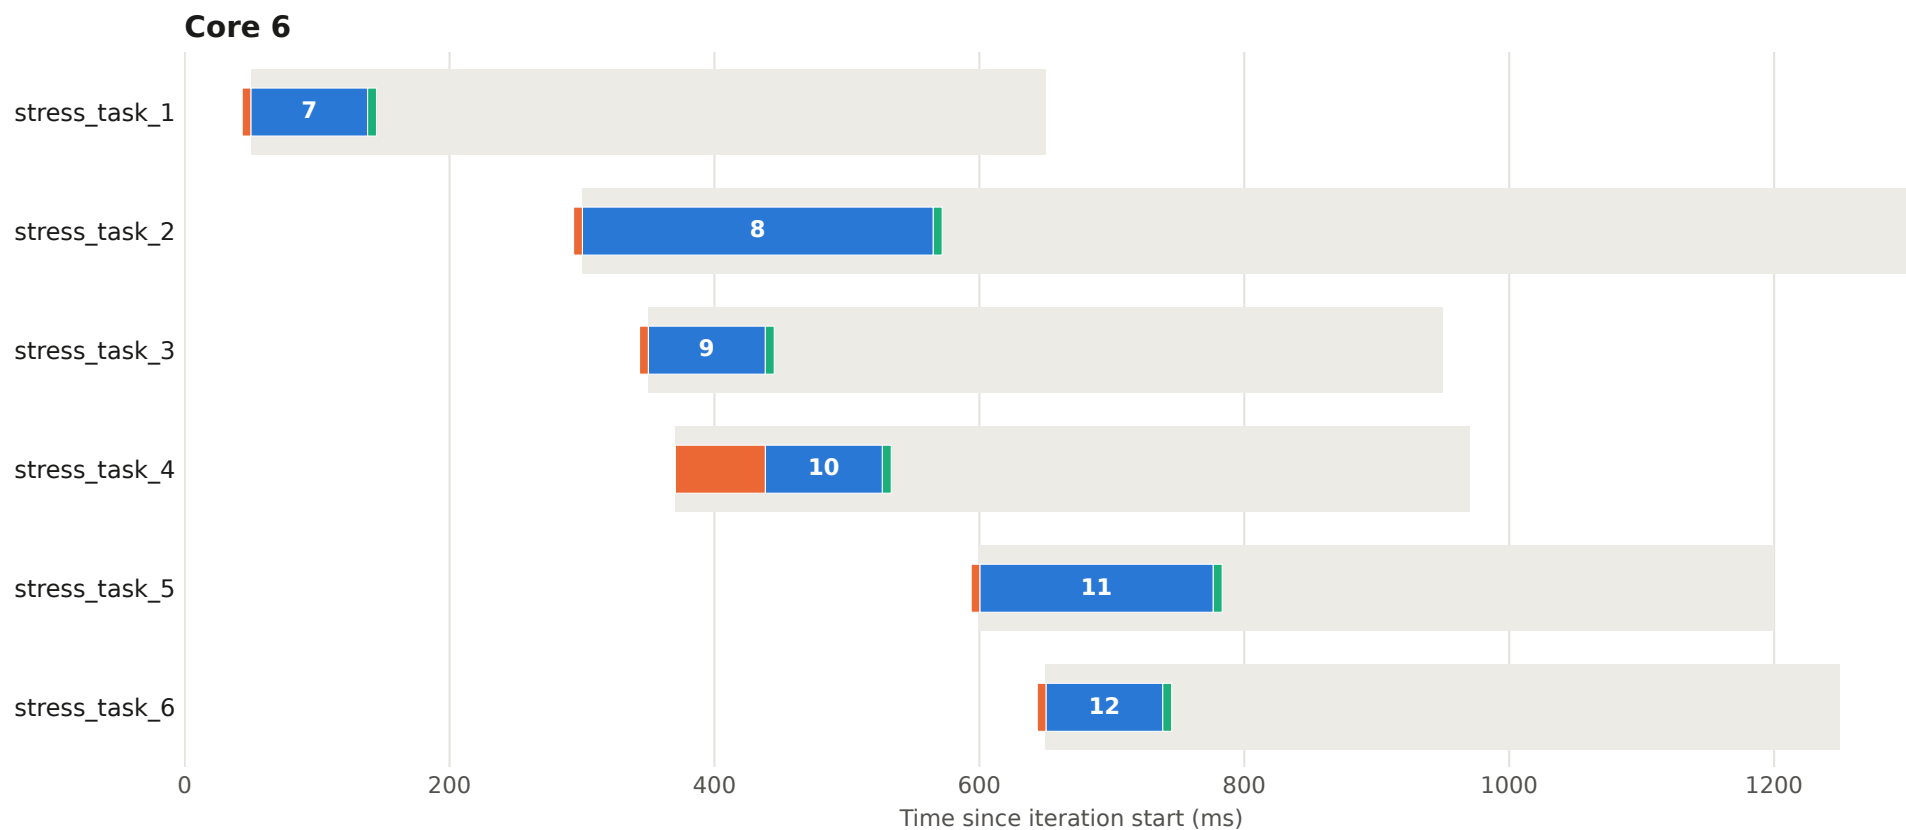


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 32 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

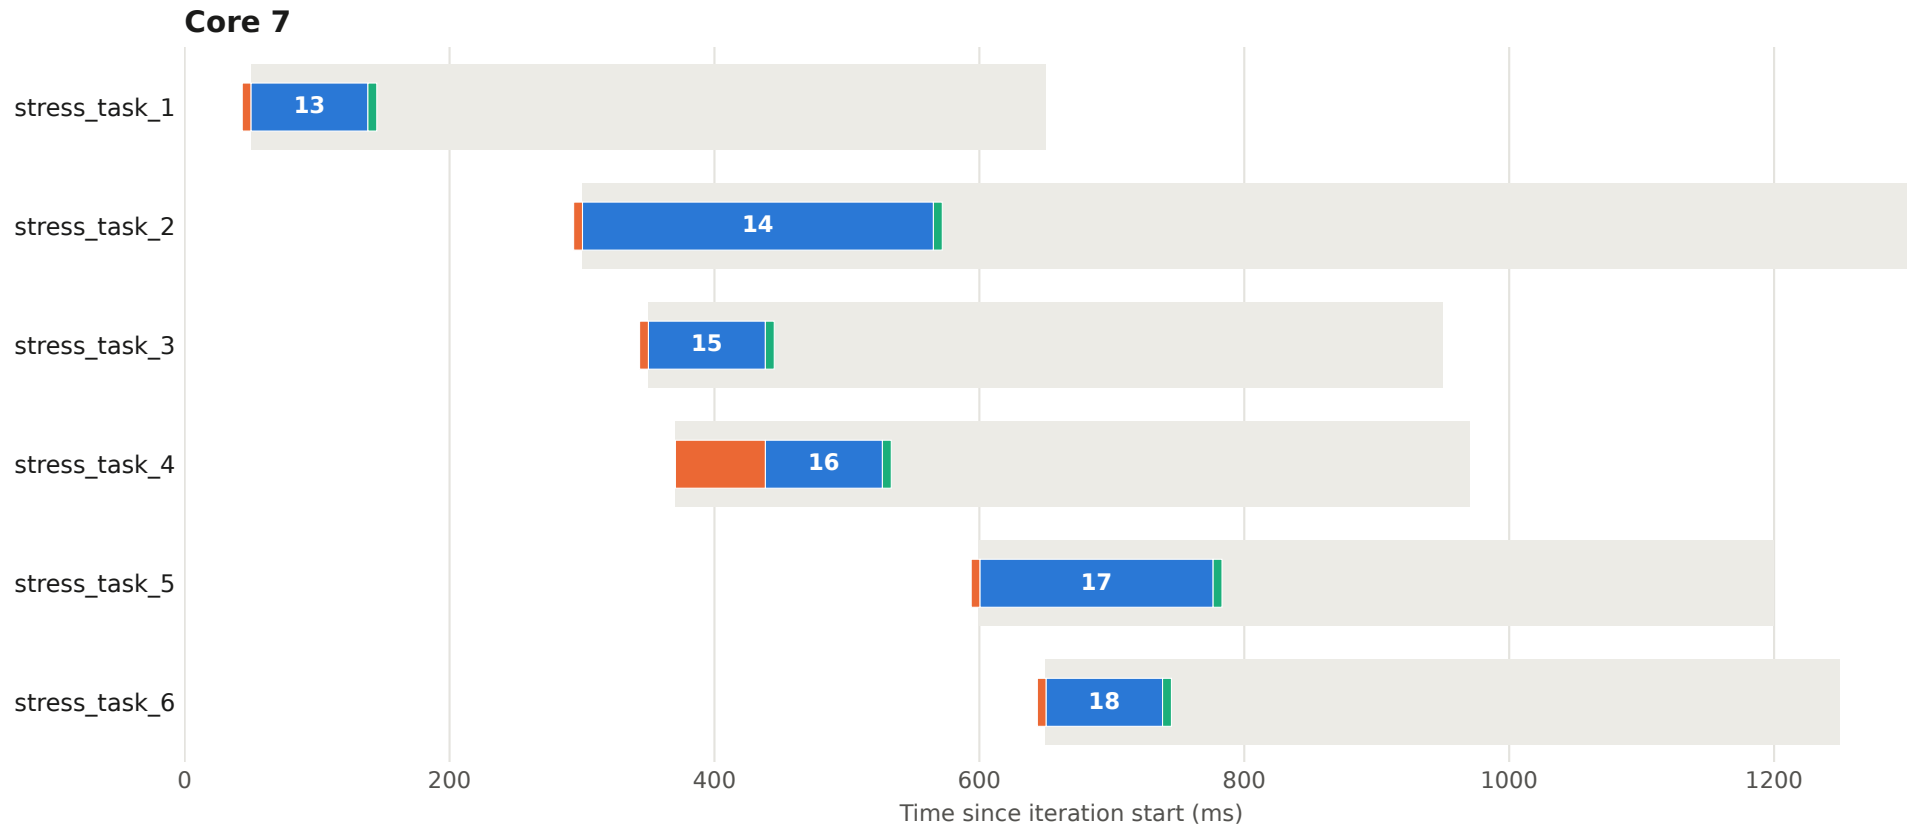


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 33 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

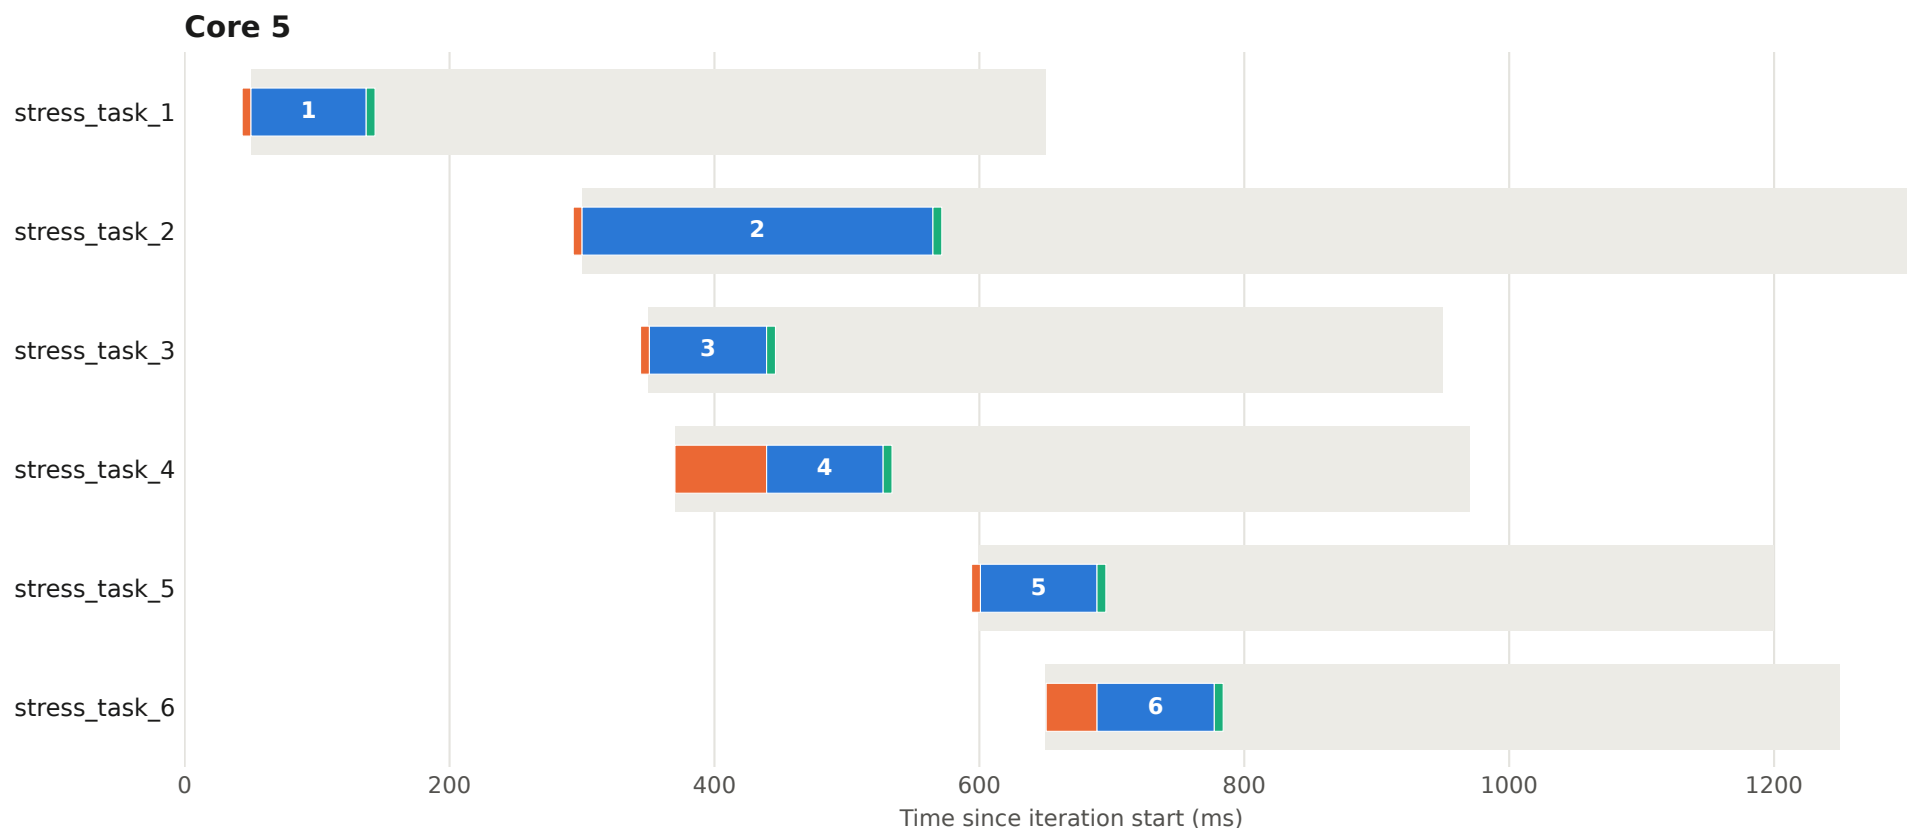


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 33 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

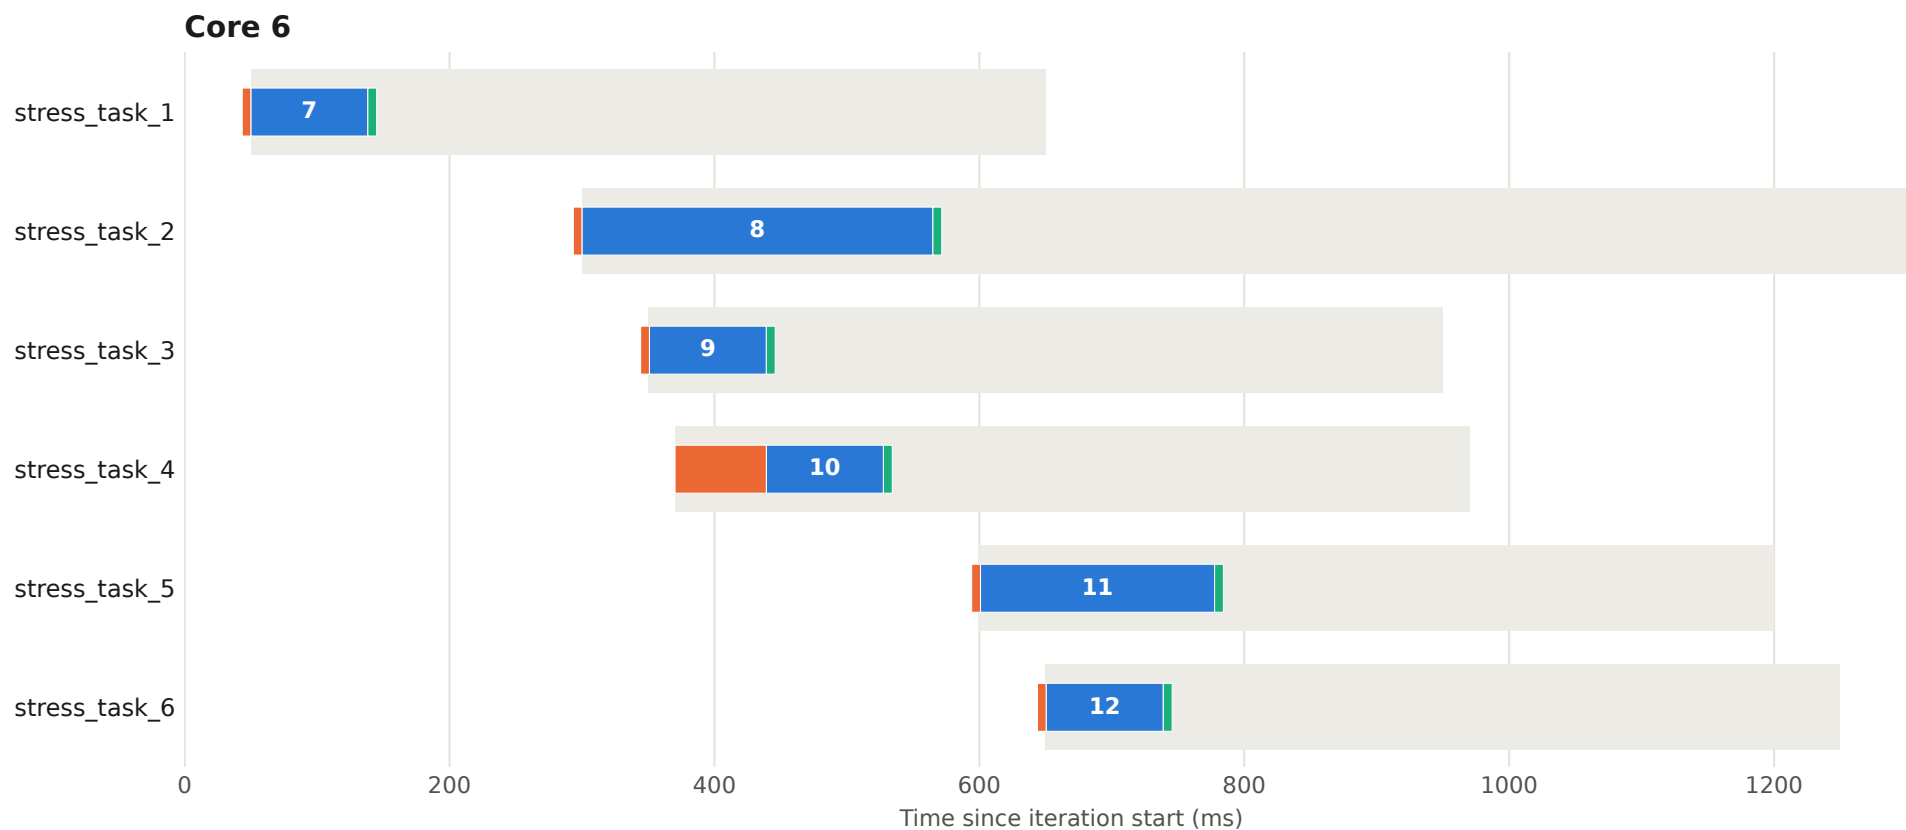


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 33 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

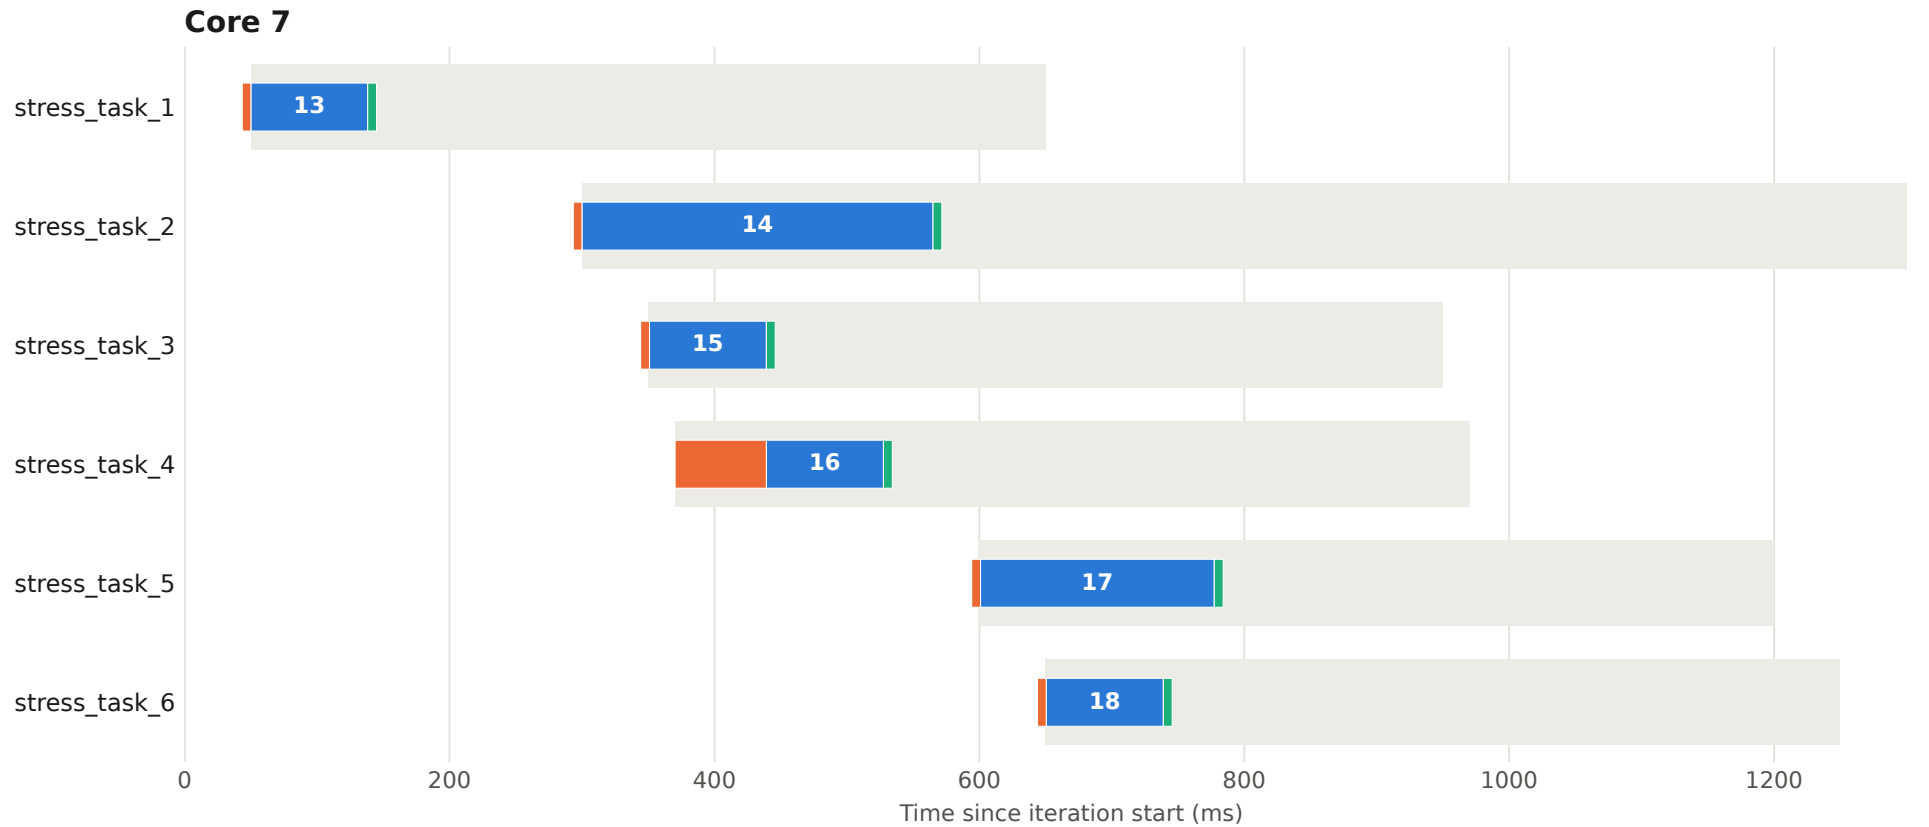


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 34 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

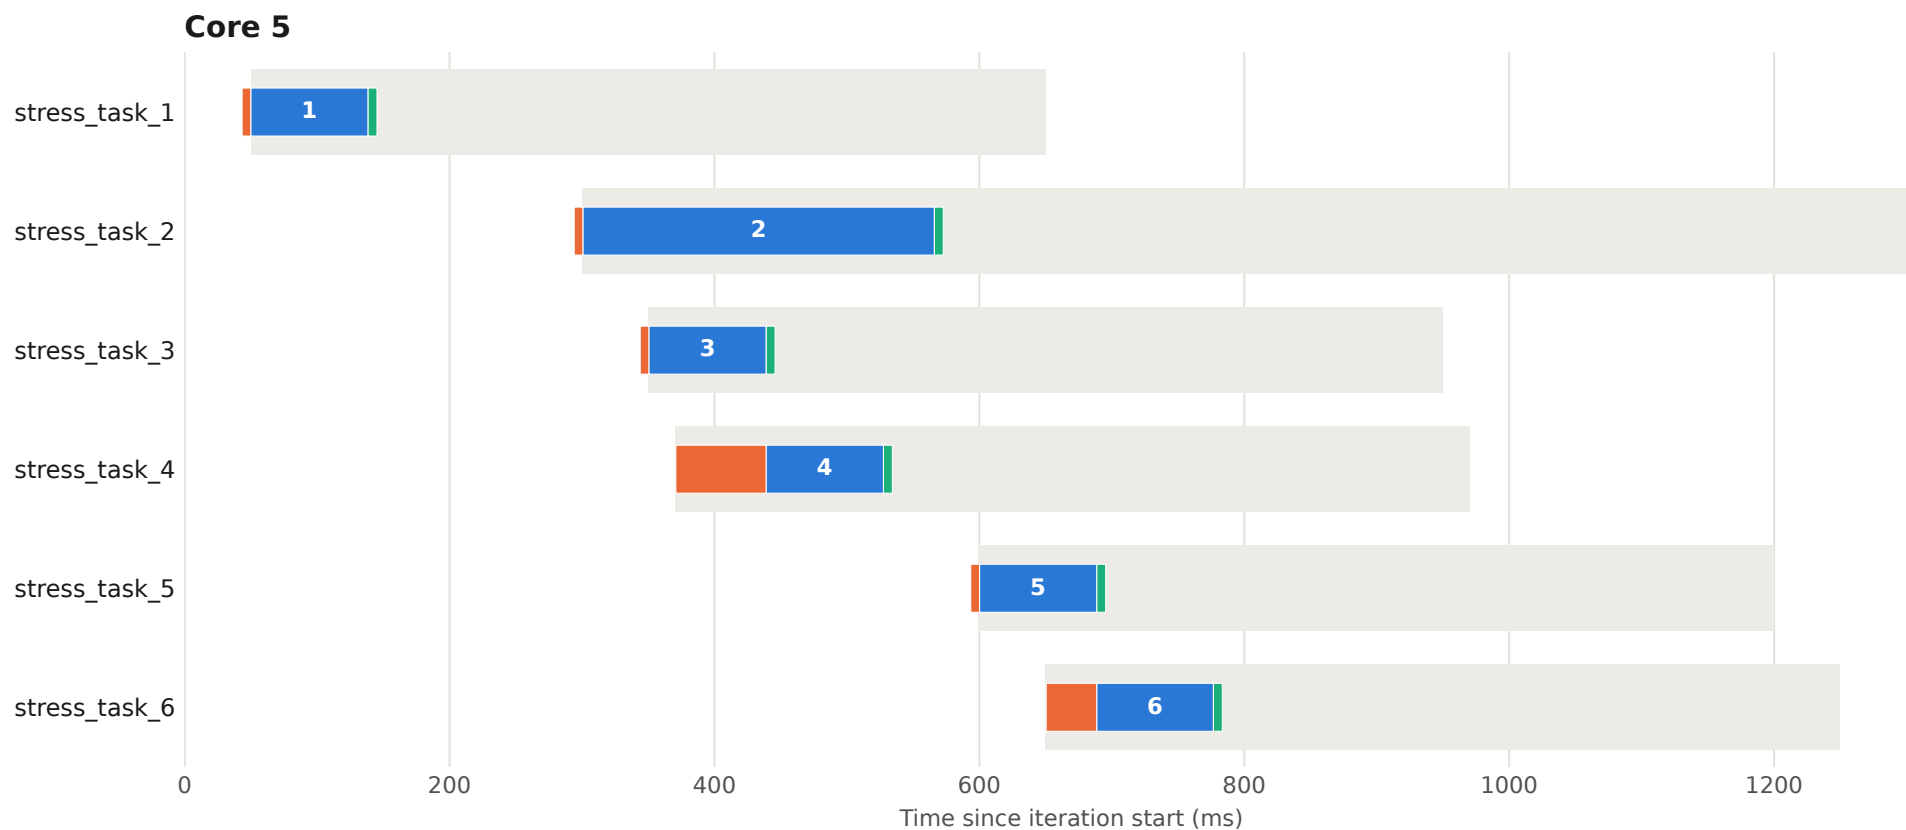


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 34 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

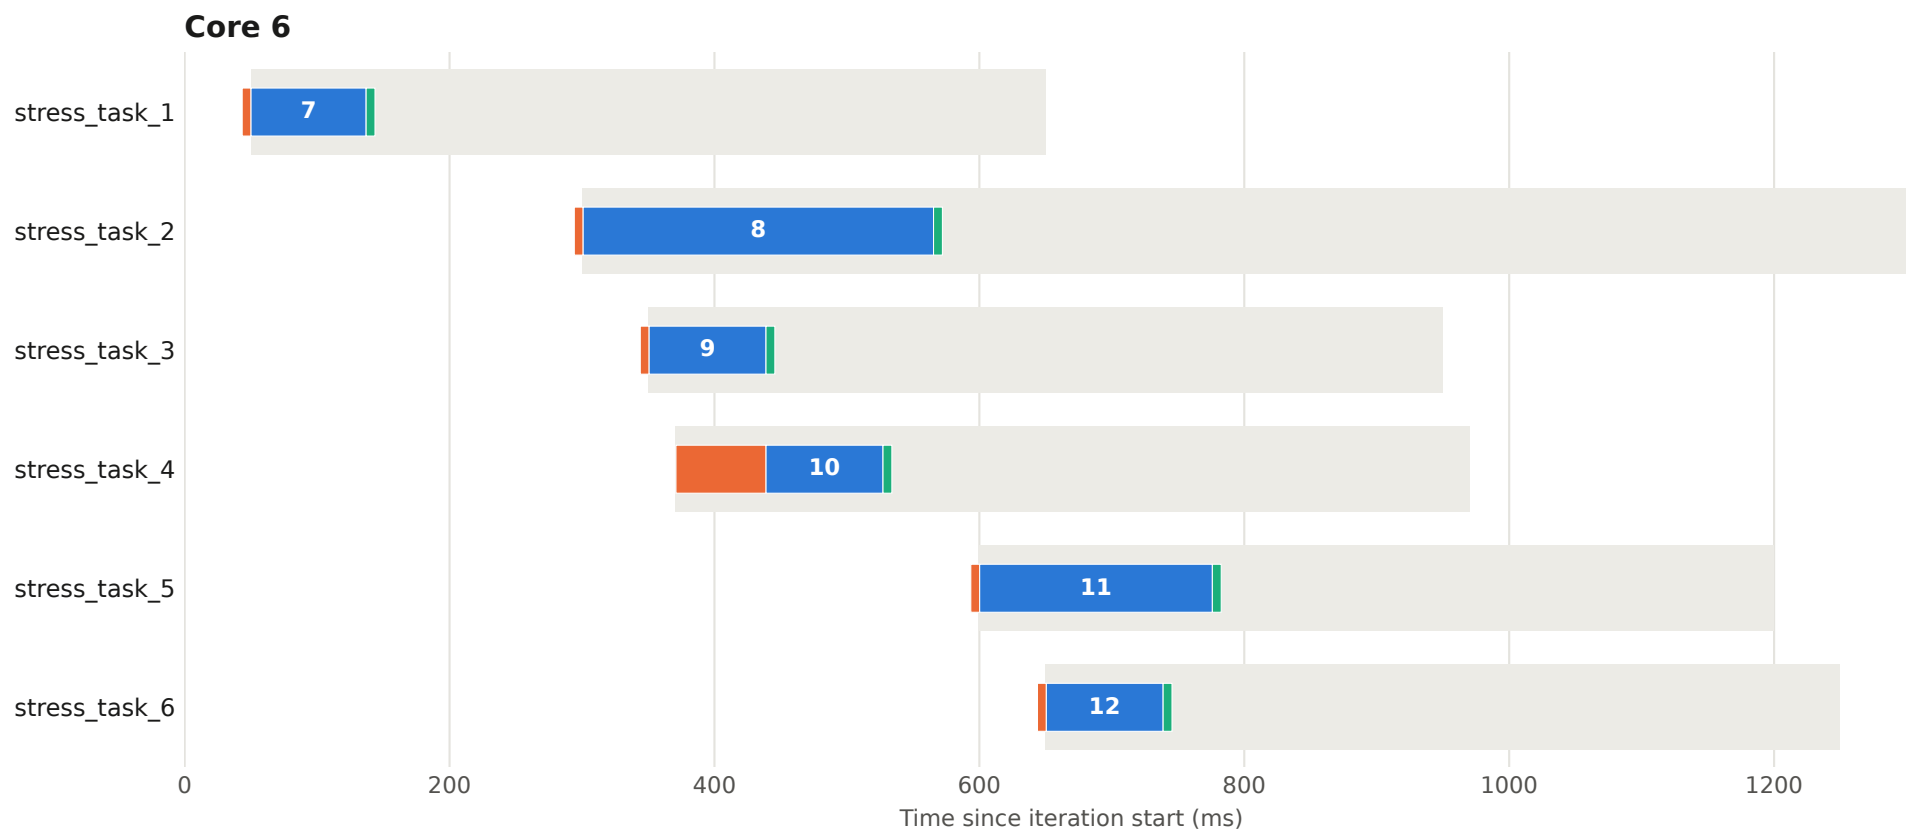


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 34 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

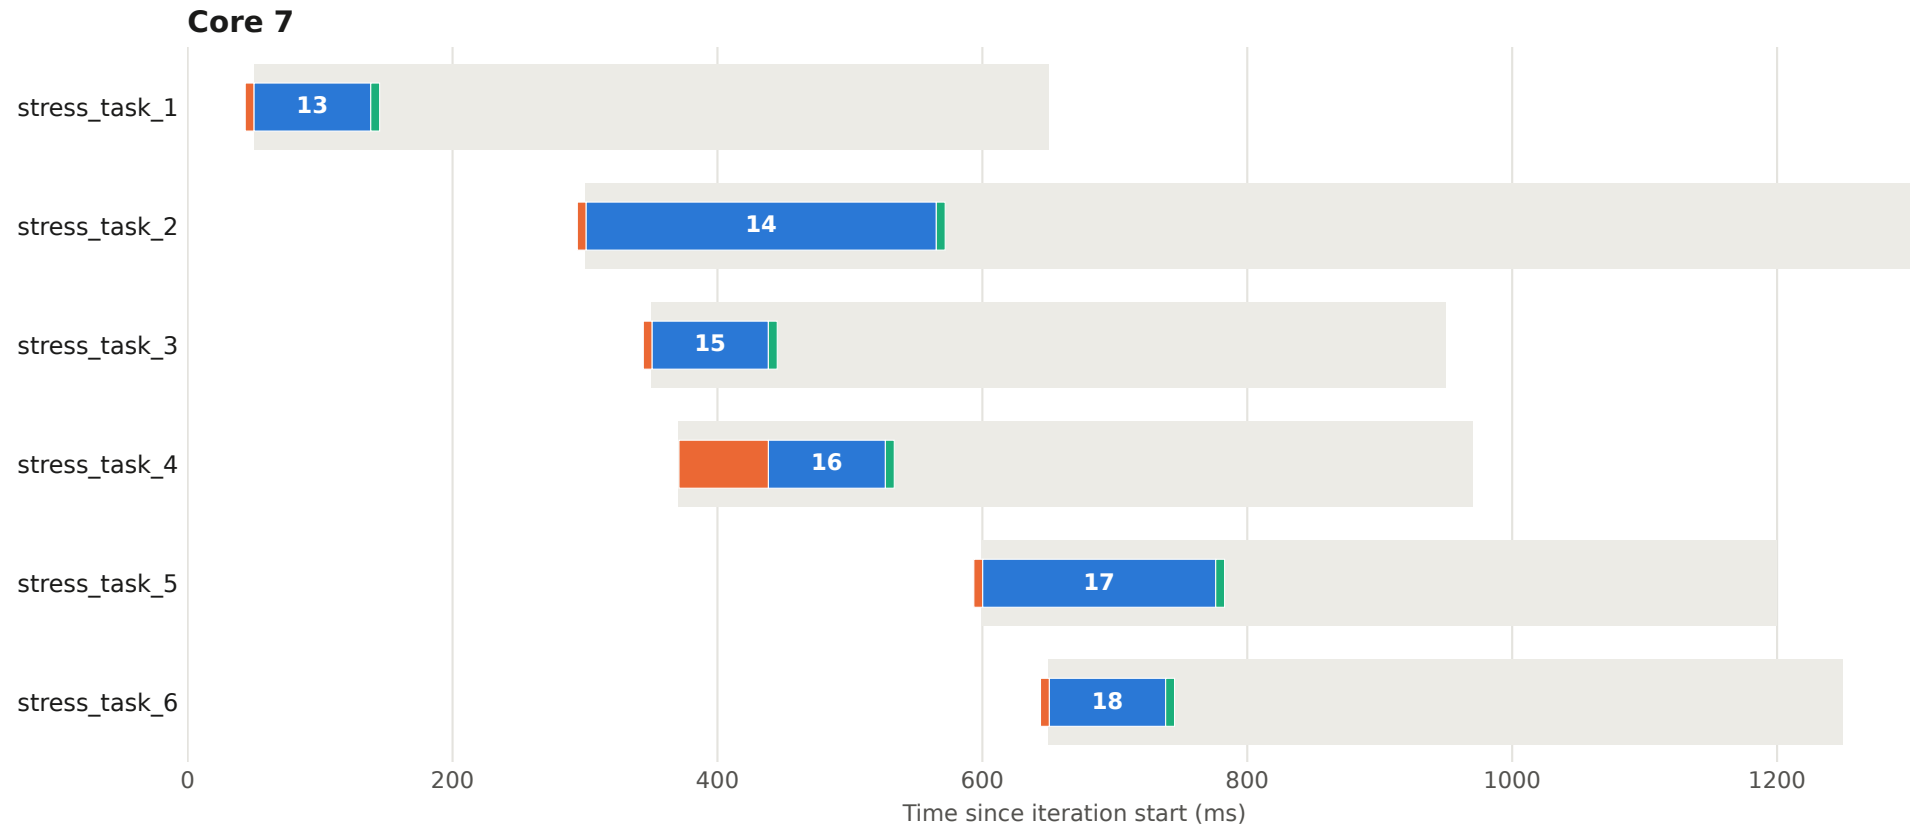


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 35 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

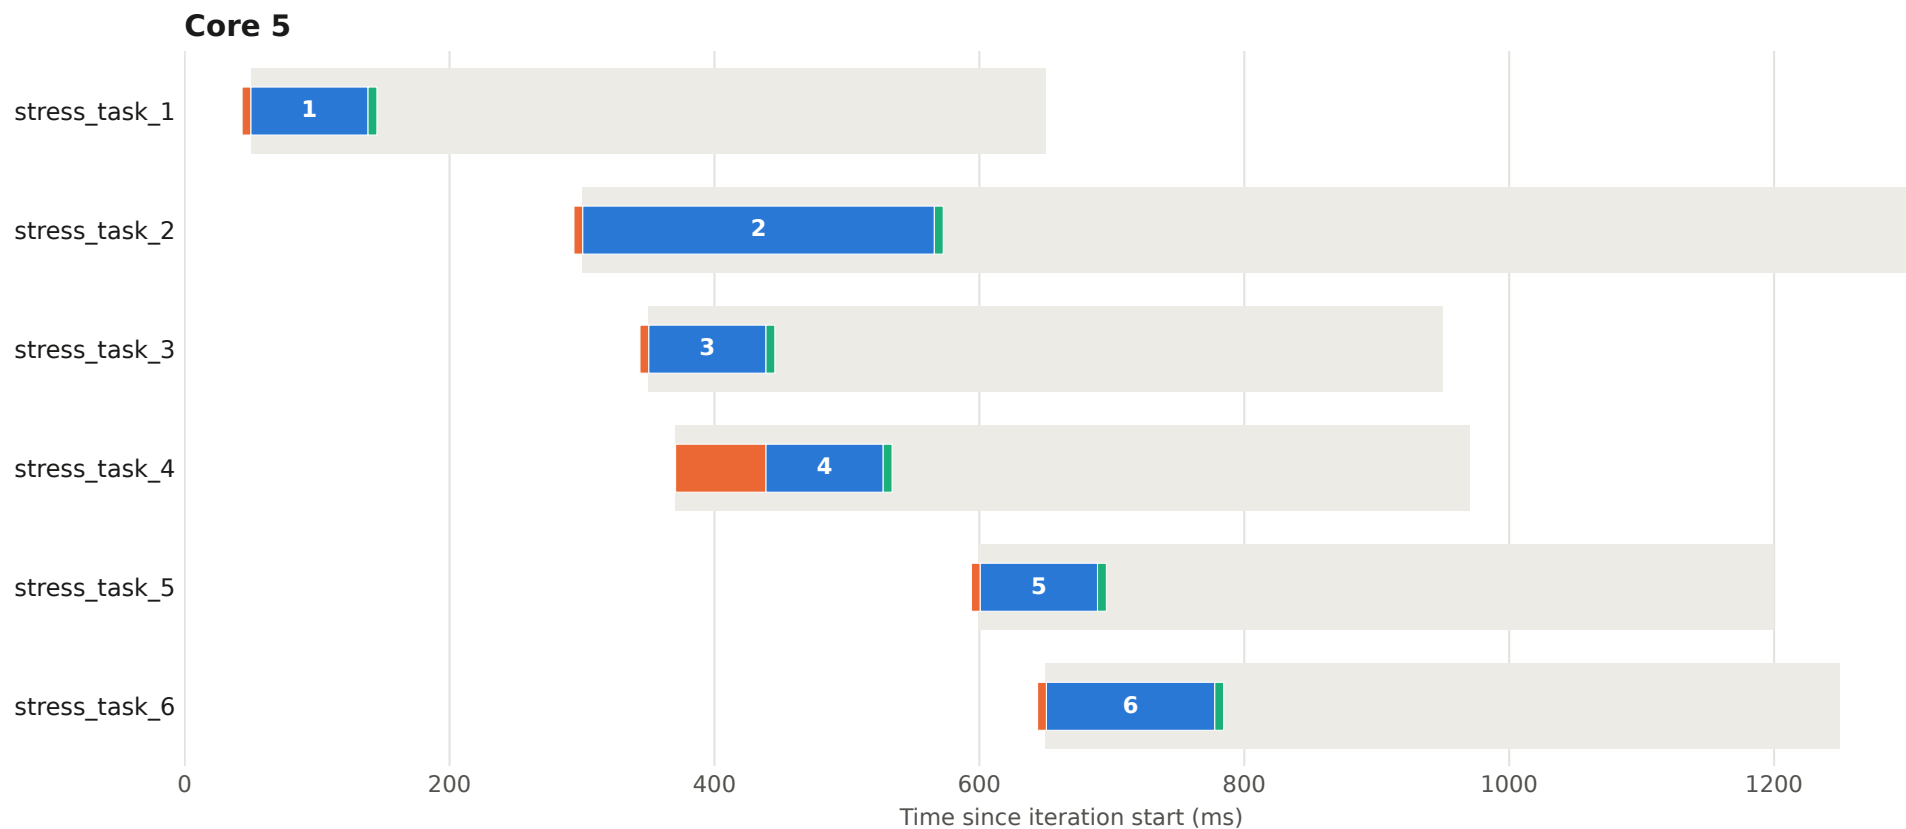


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 35 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

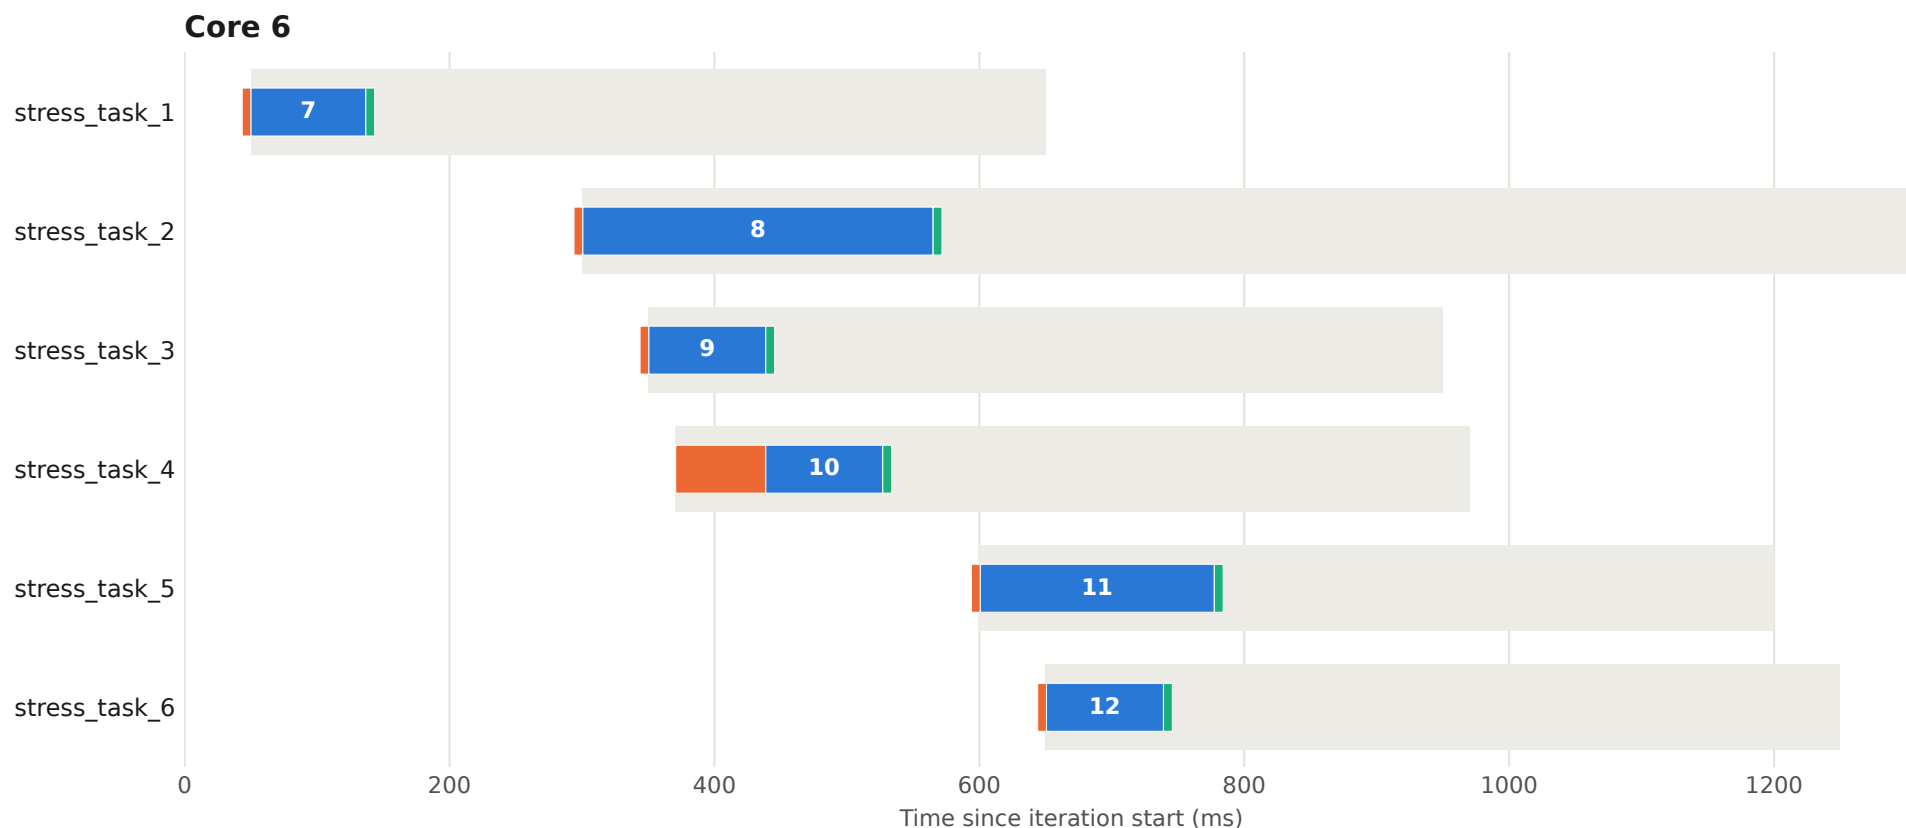


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 35 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

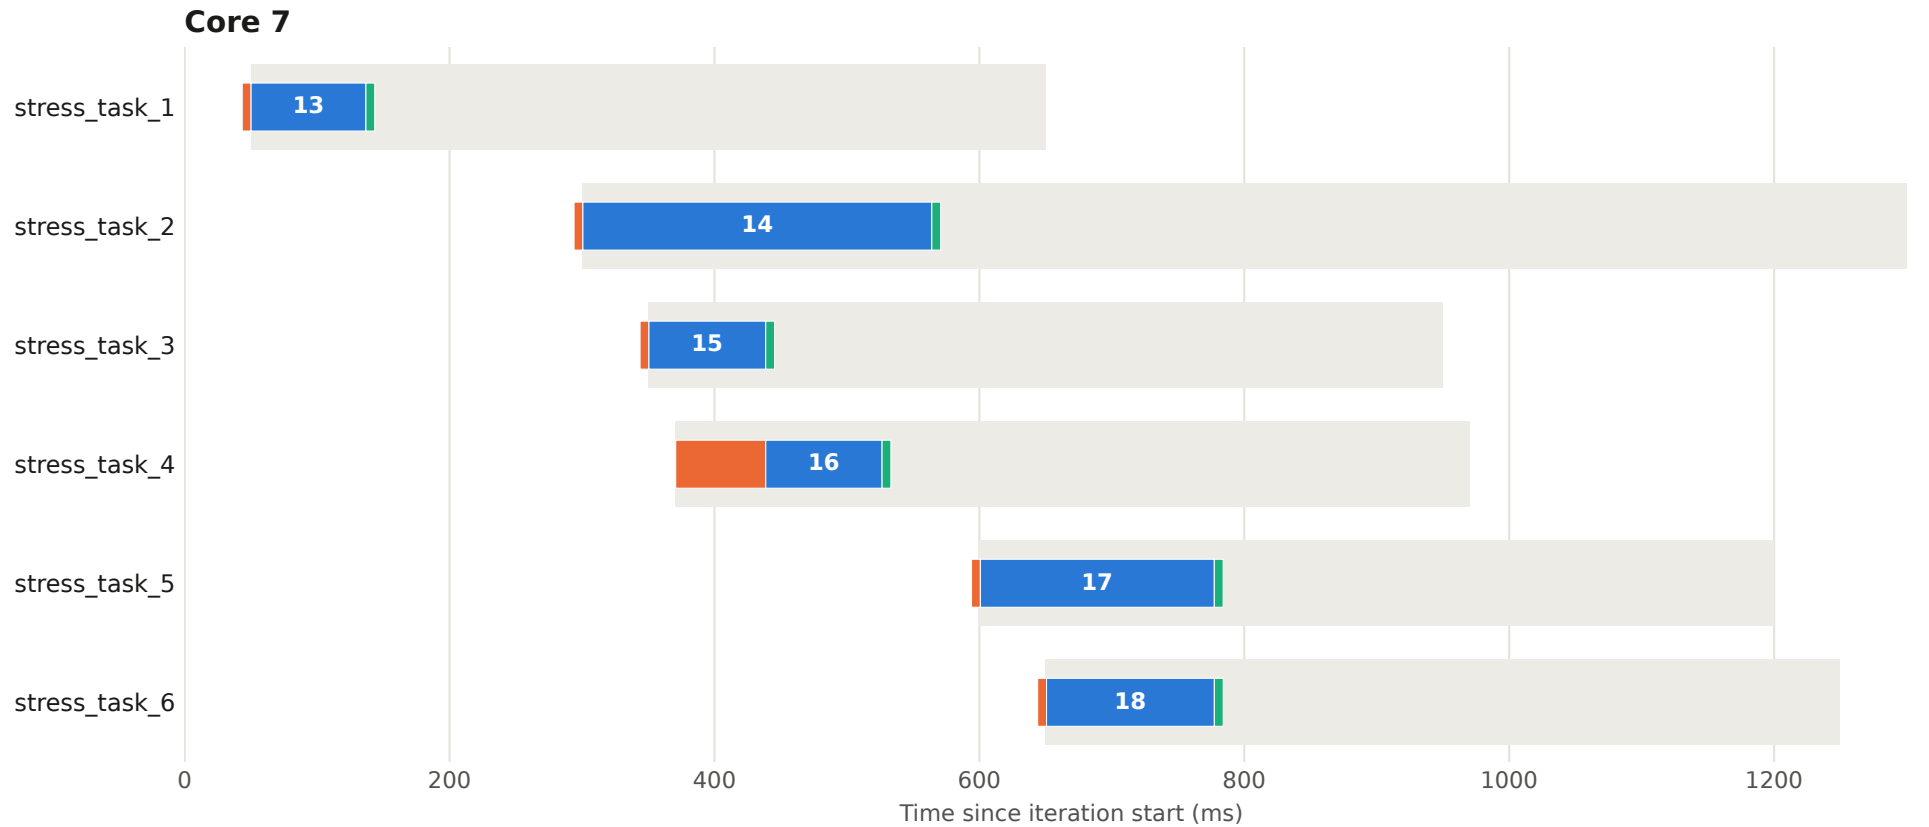


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 36 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

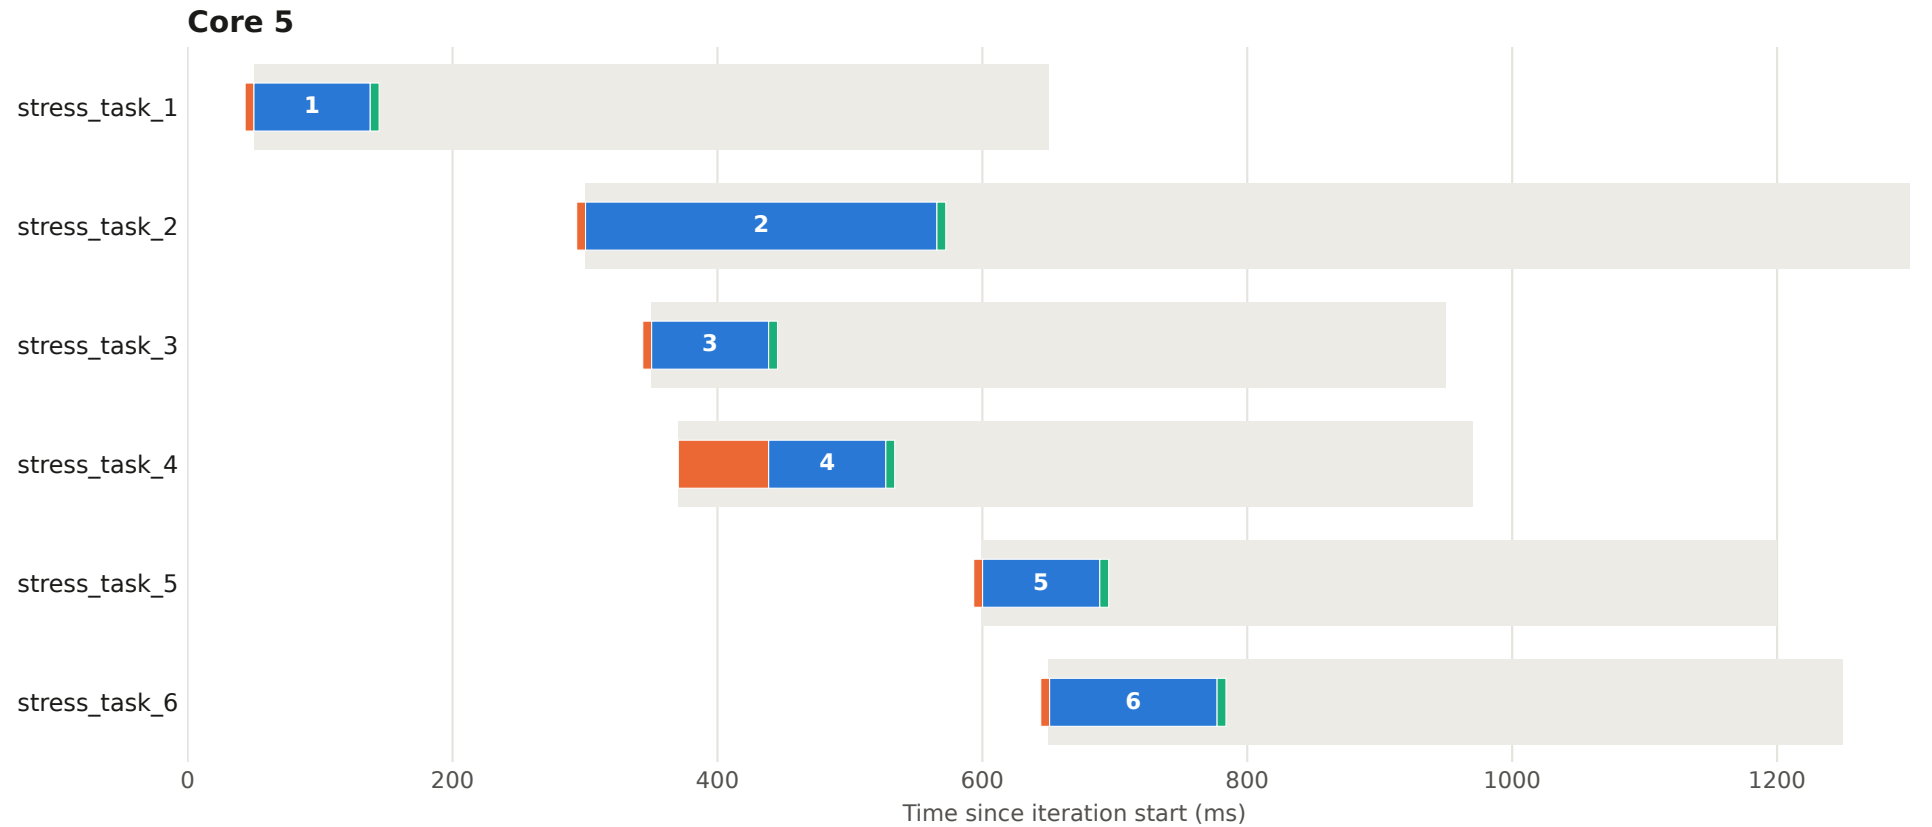


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 36 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

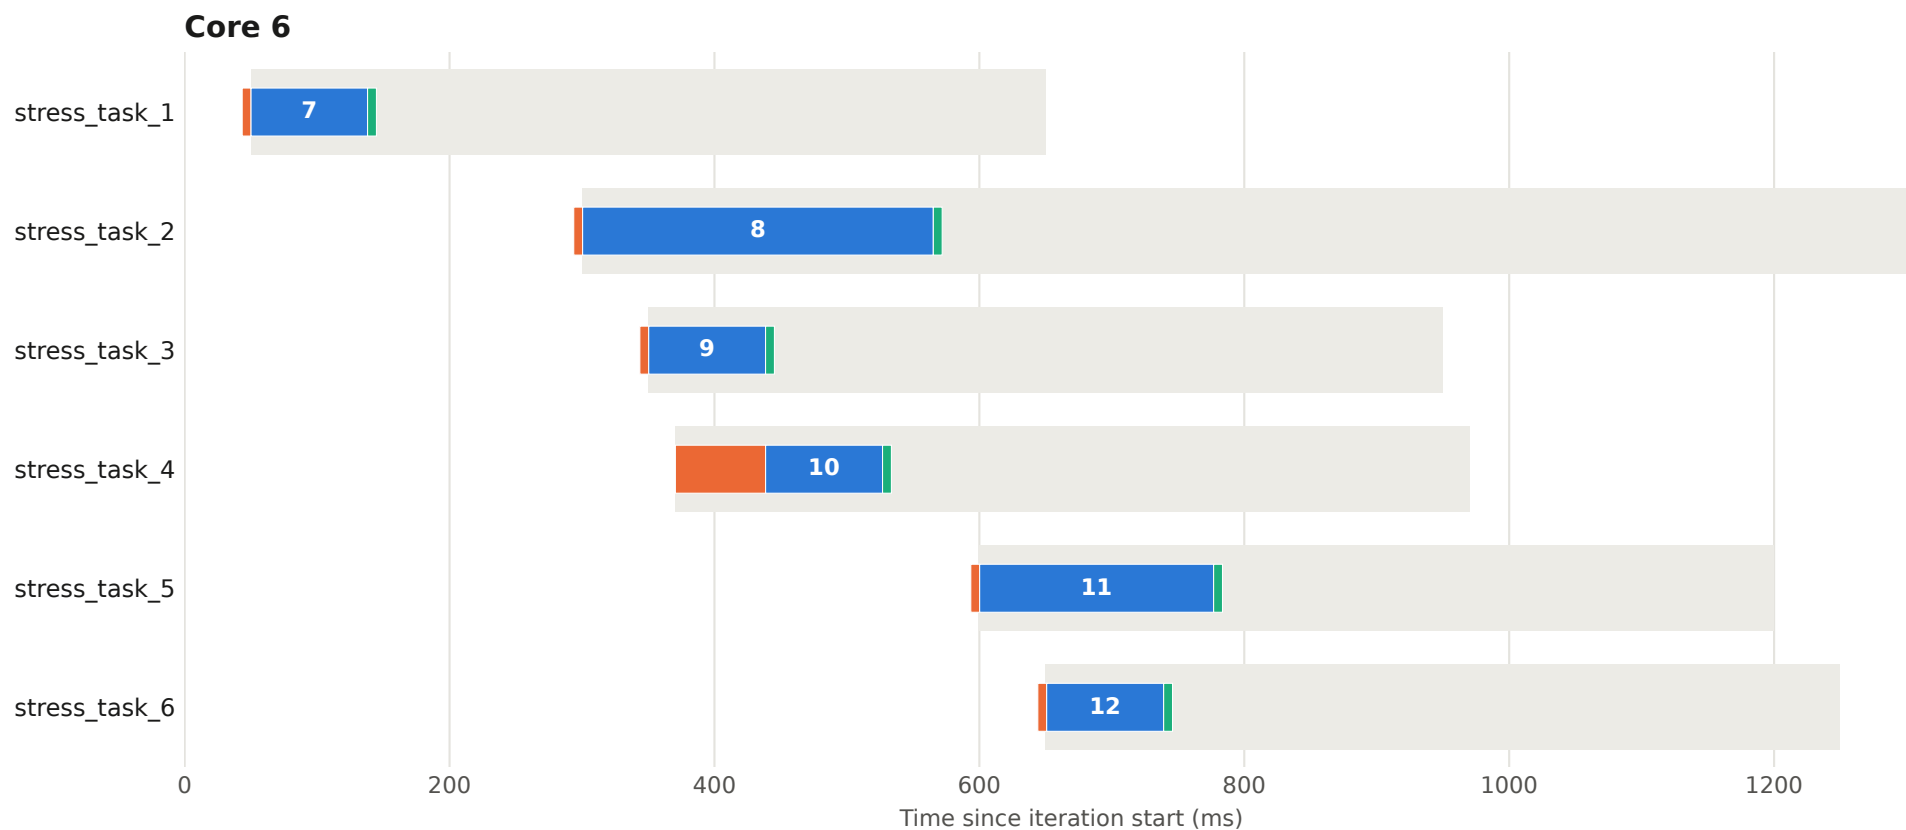


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 36 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

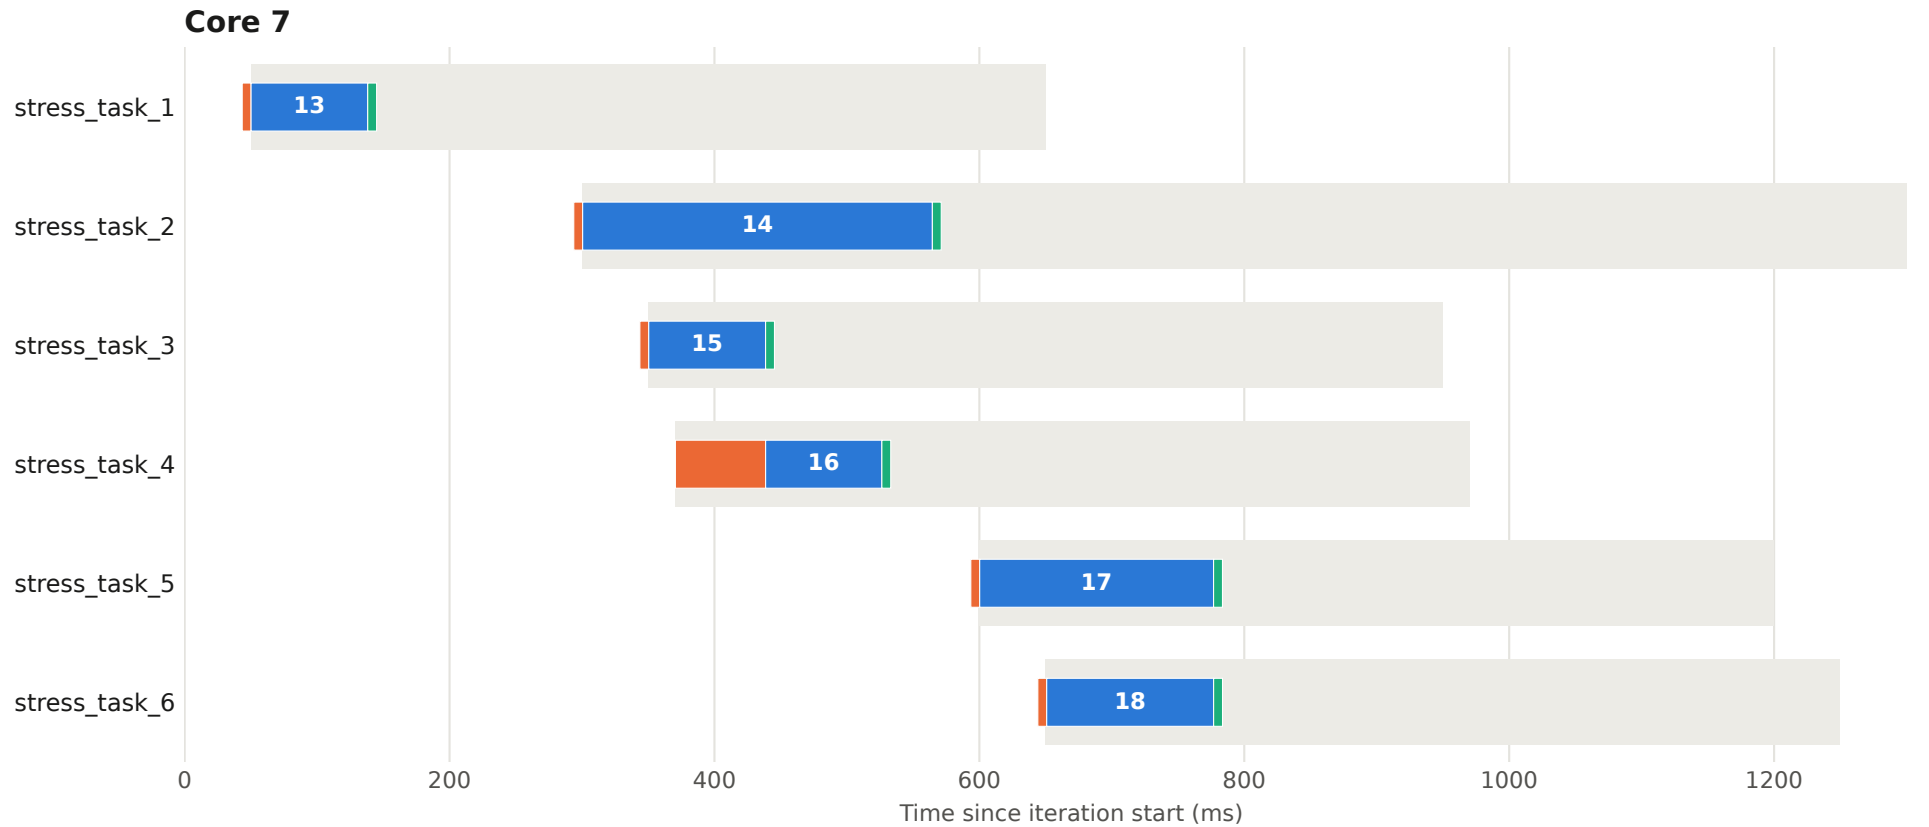


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 37 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

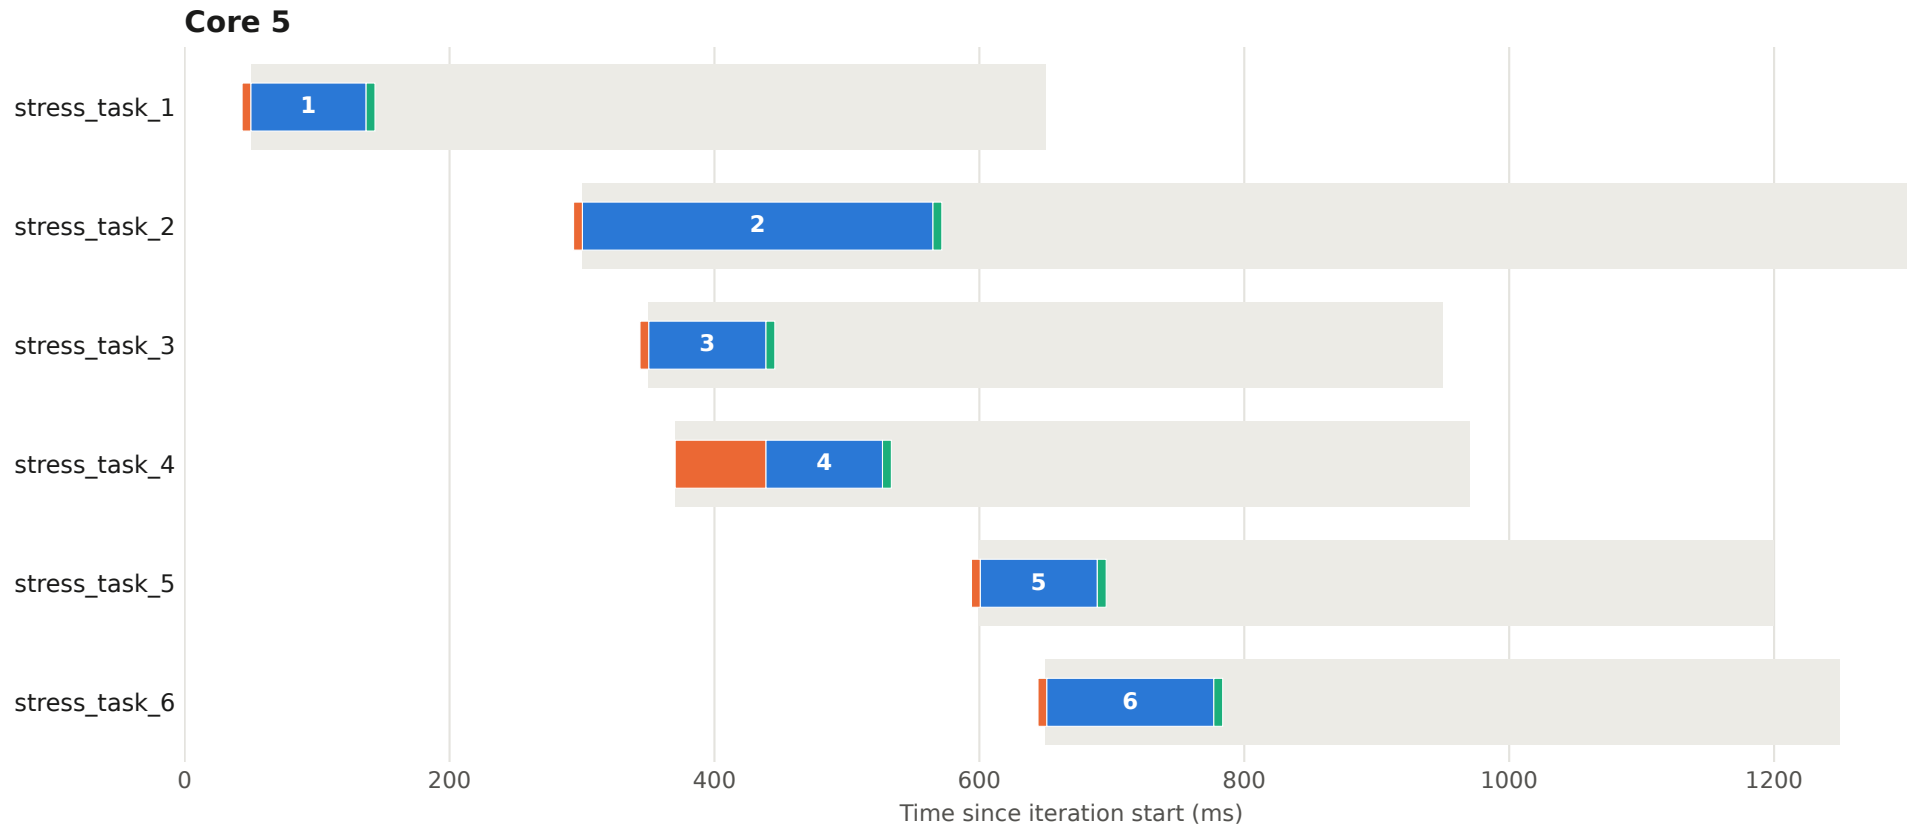


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 37 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

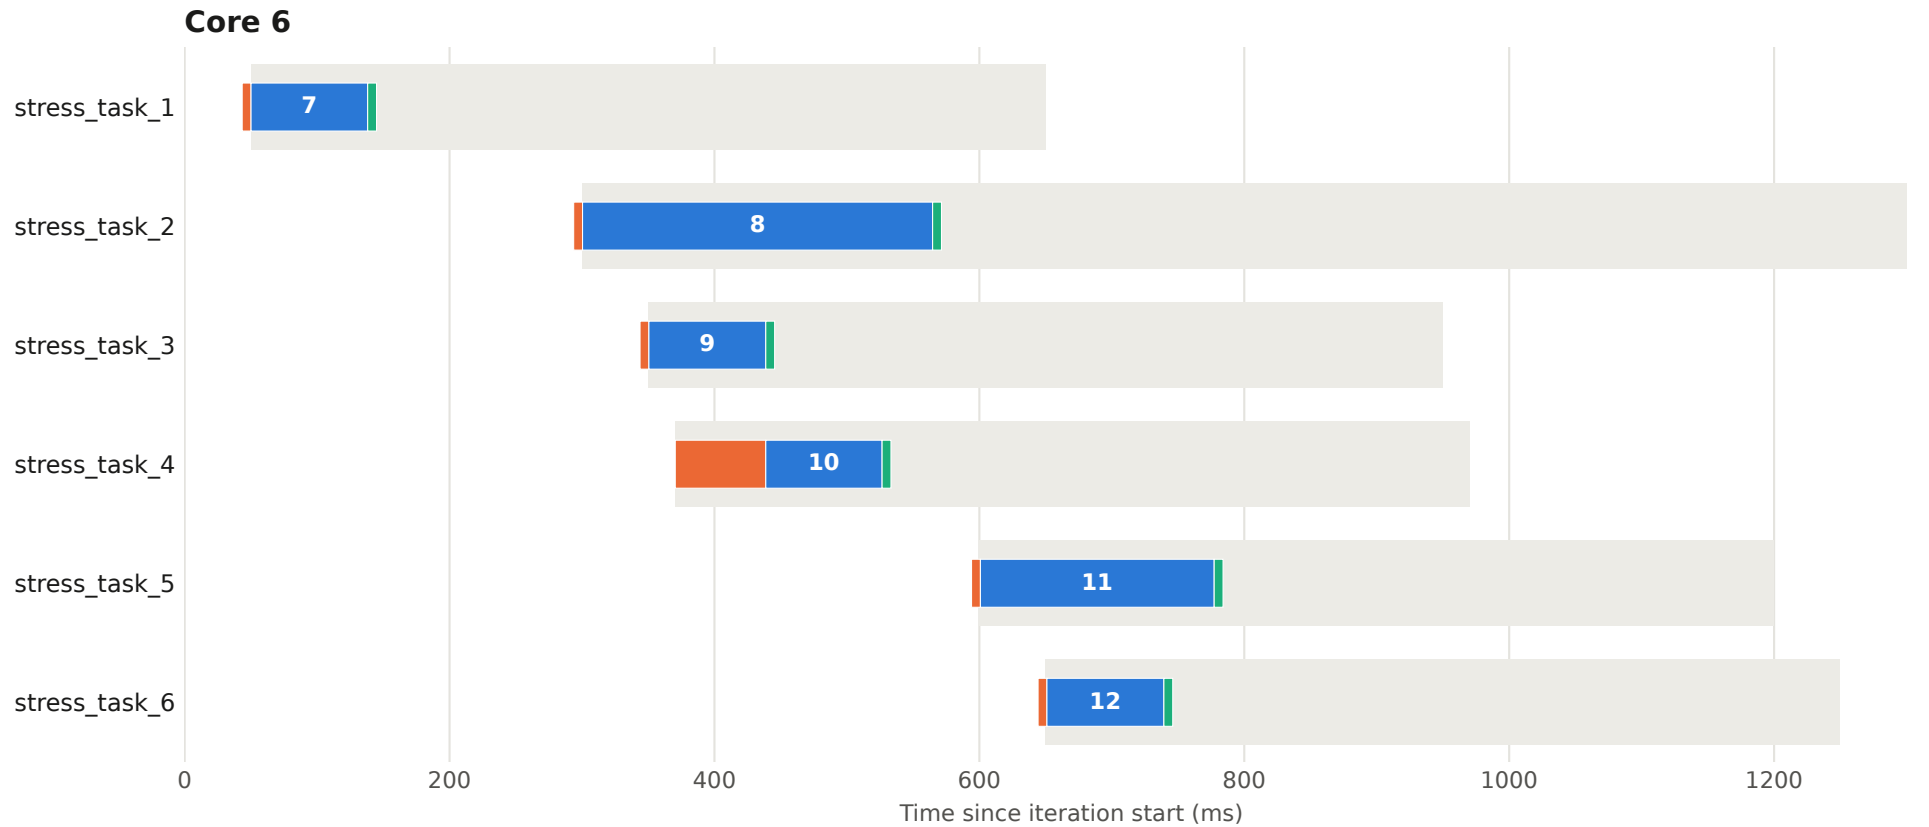


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 37 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

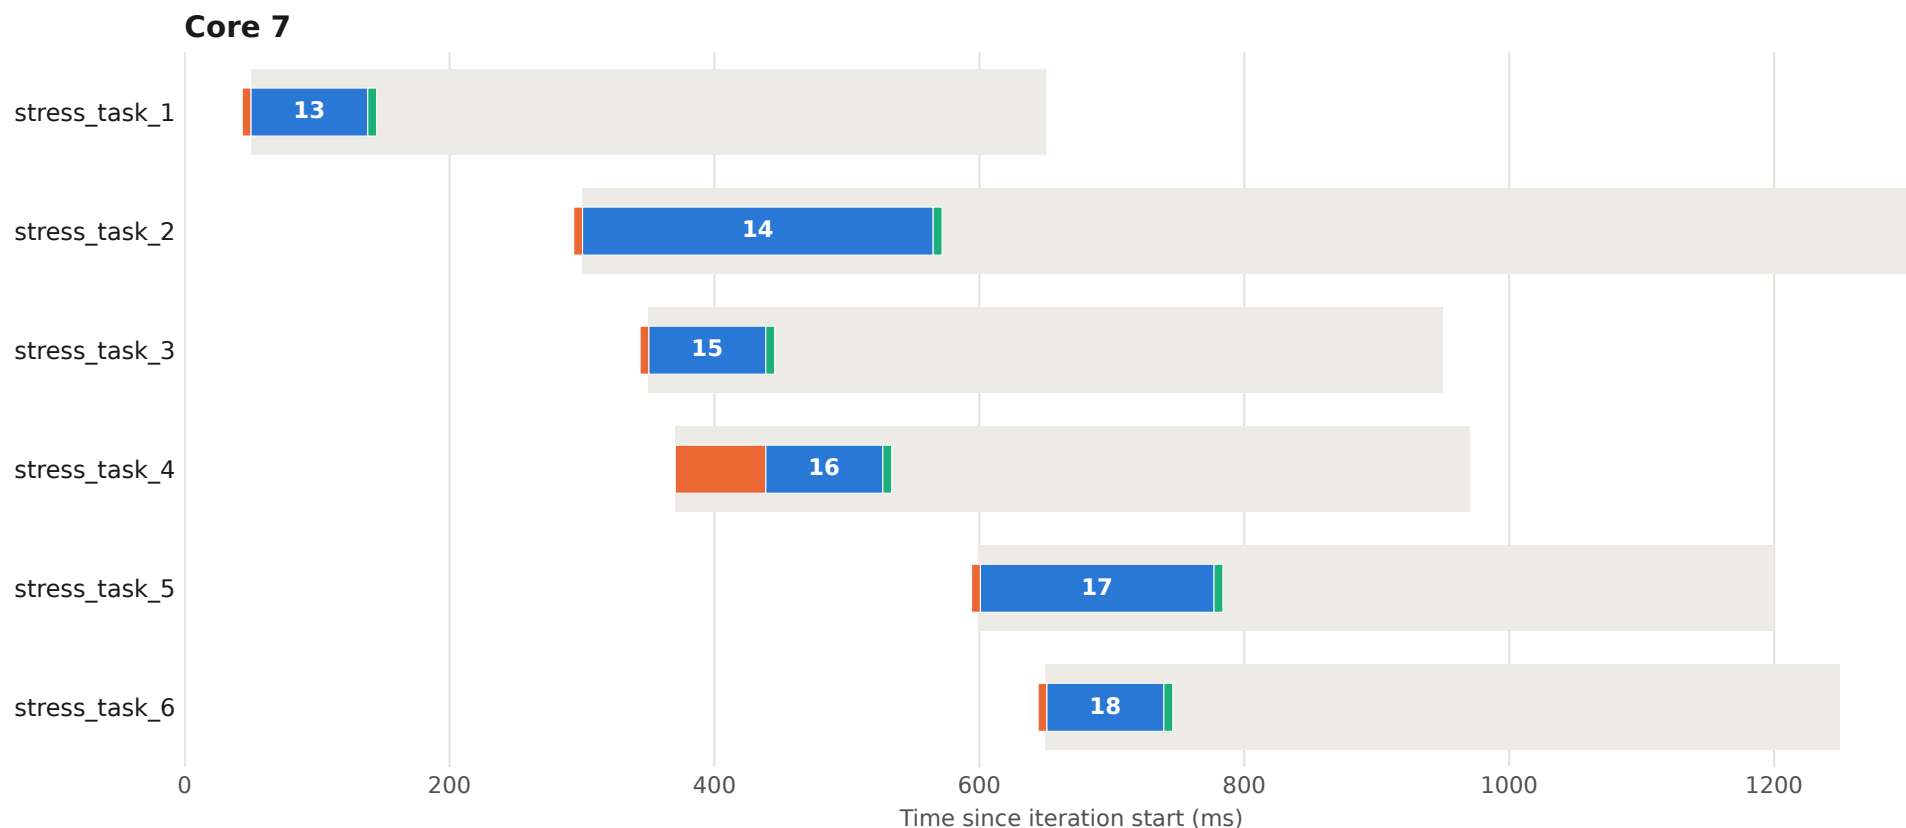


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 38 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

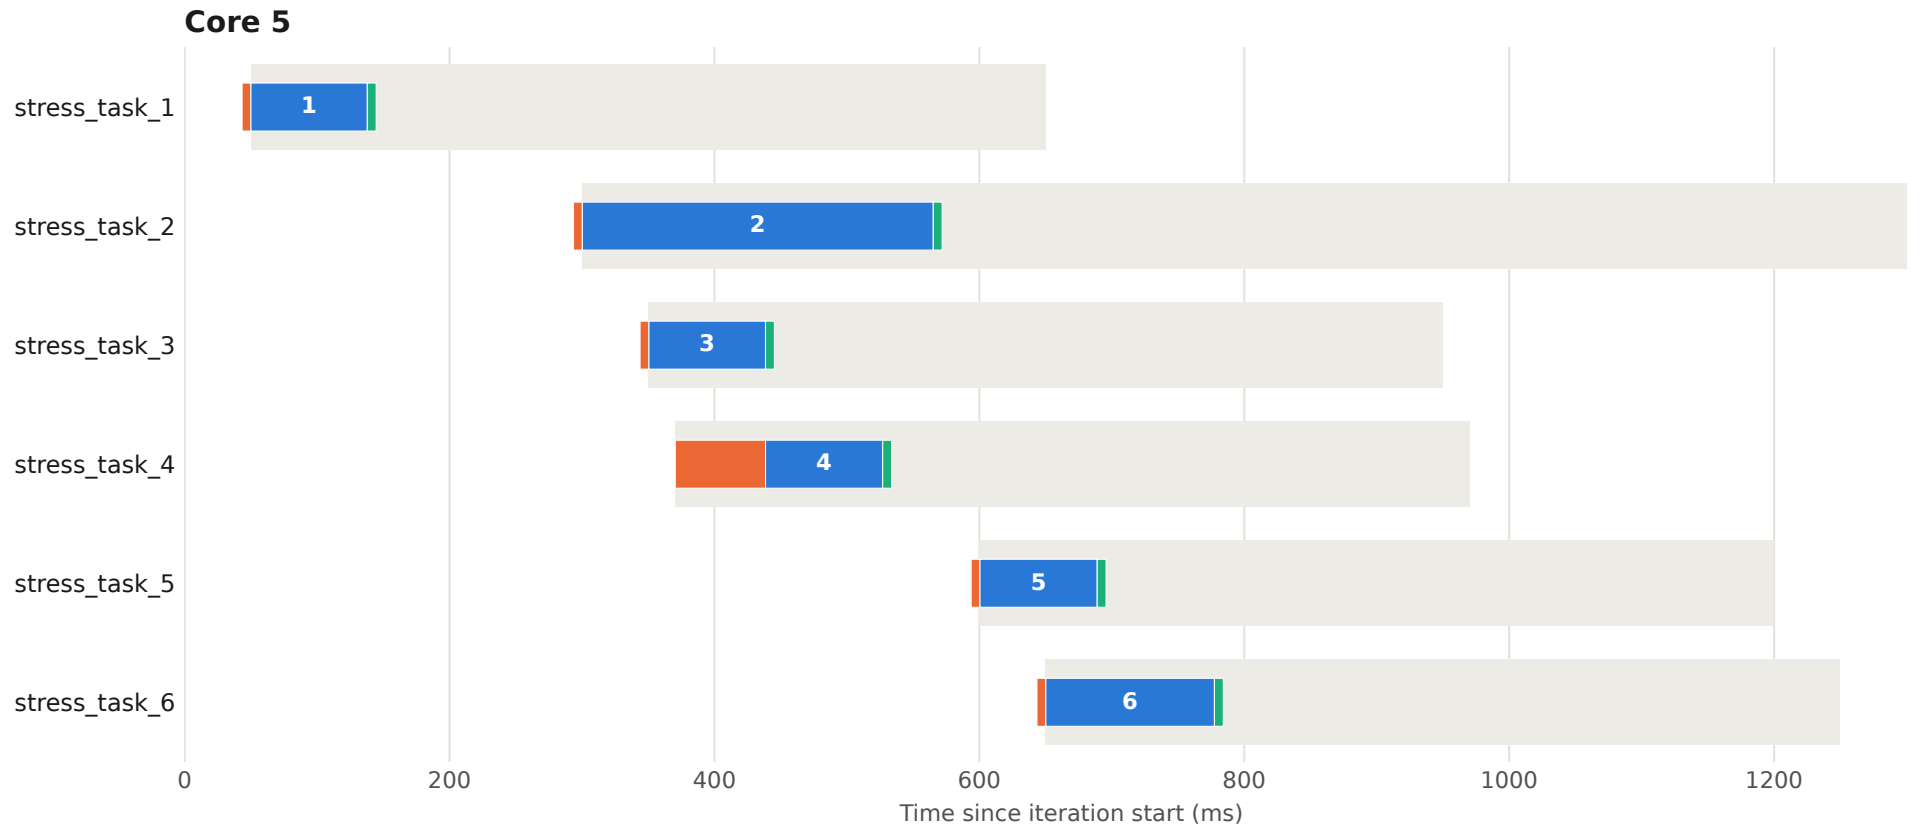


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 38 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

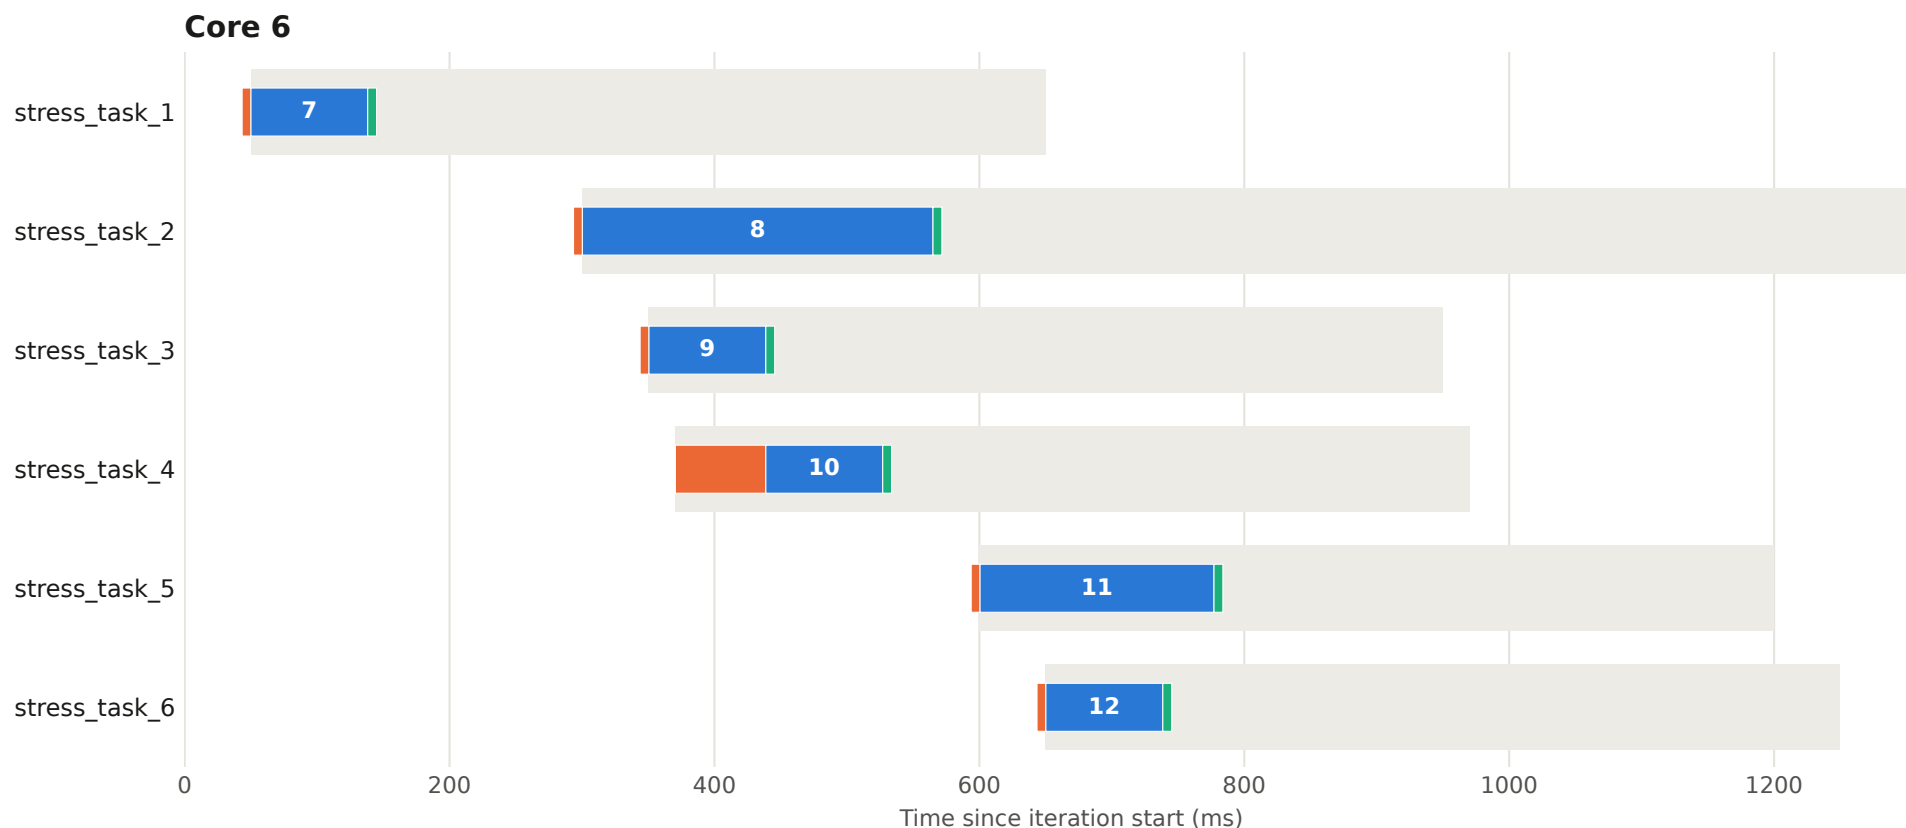


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 38 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

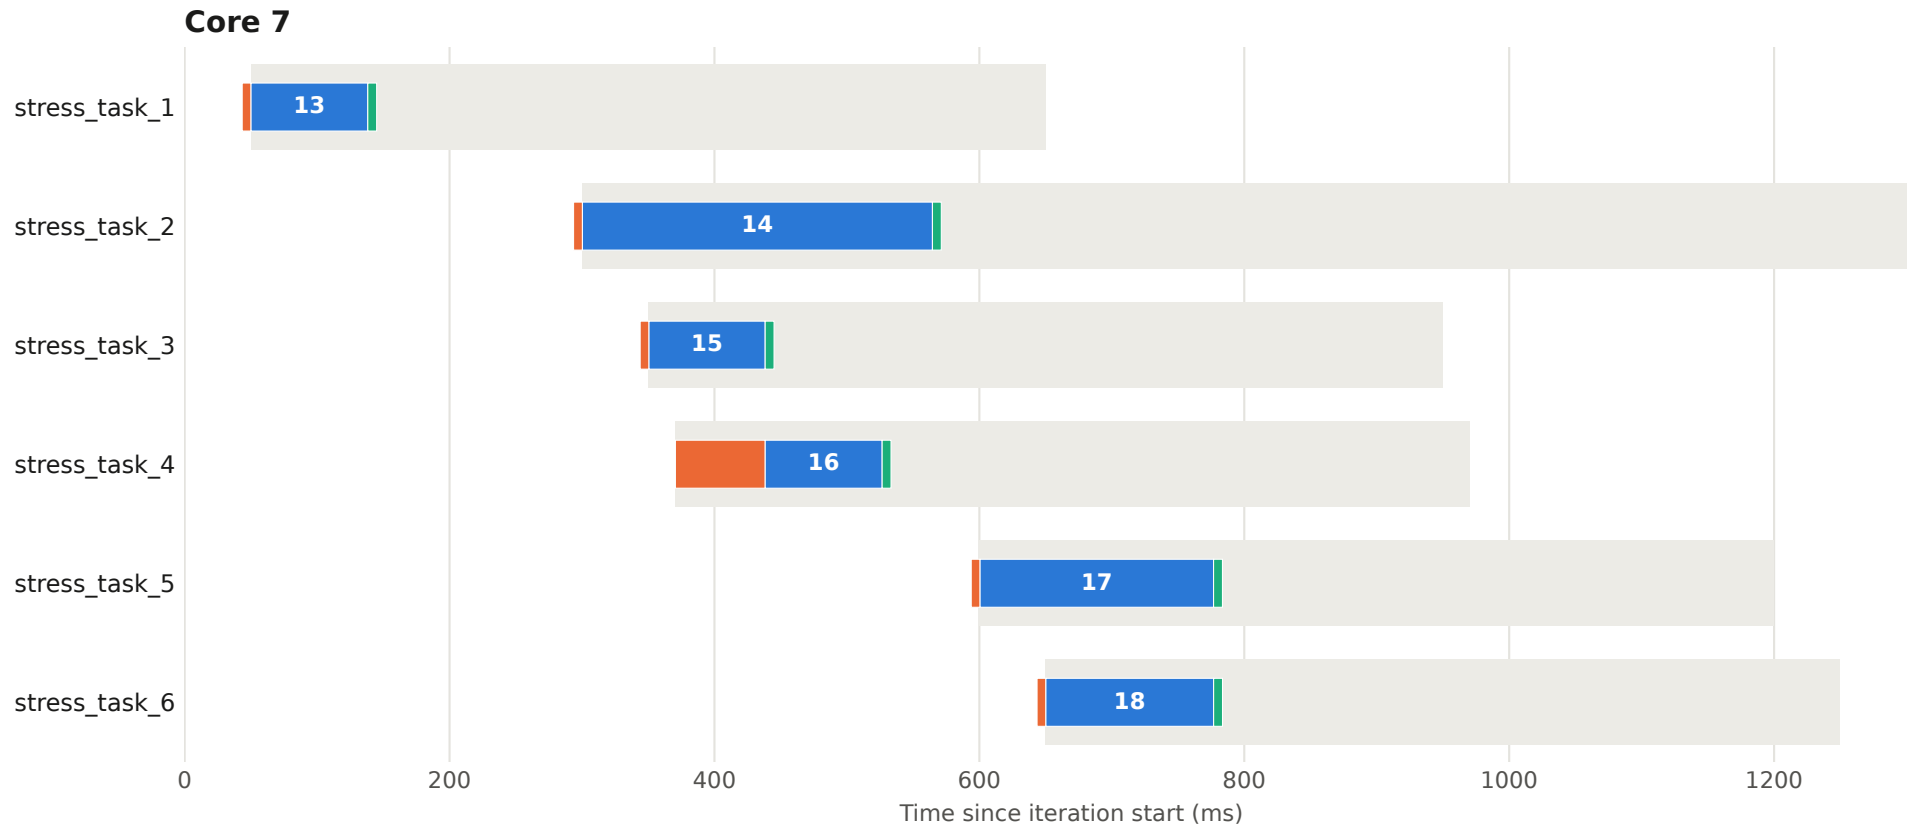


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 39 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

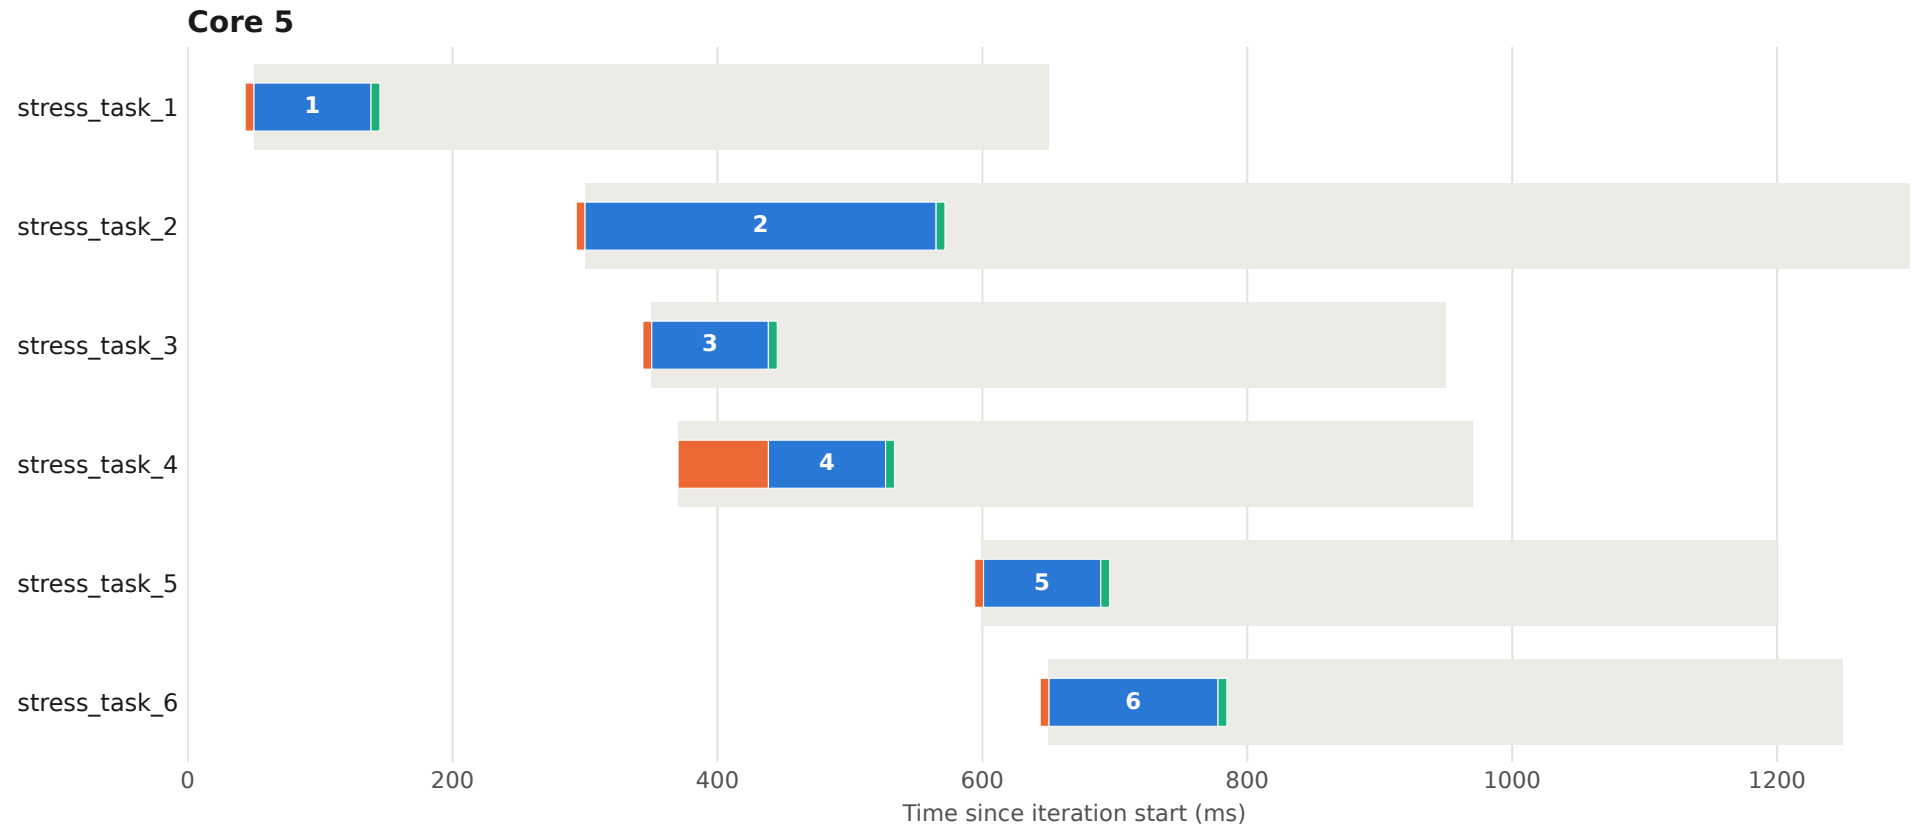


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 39 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

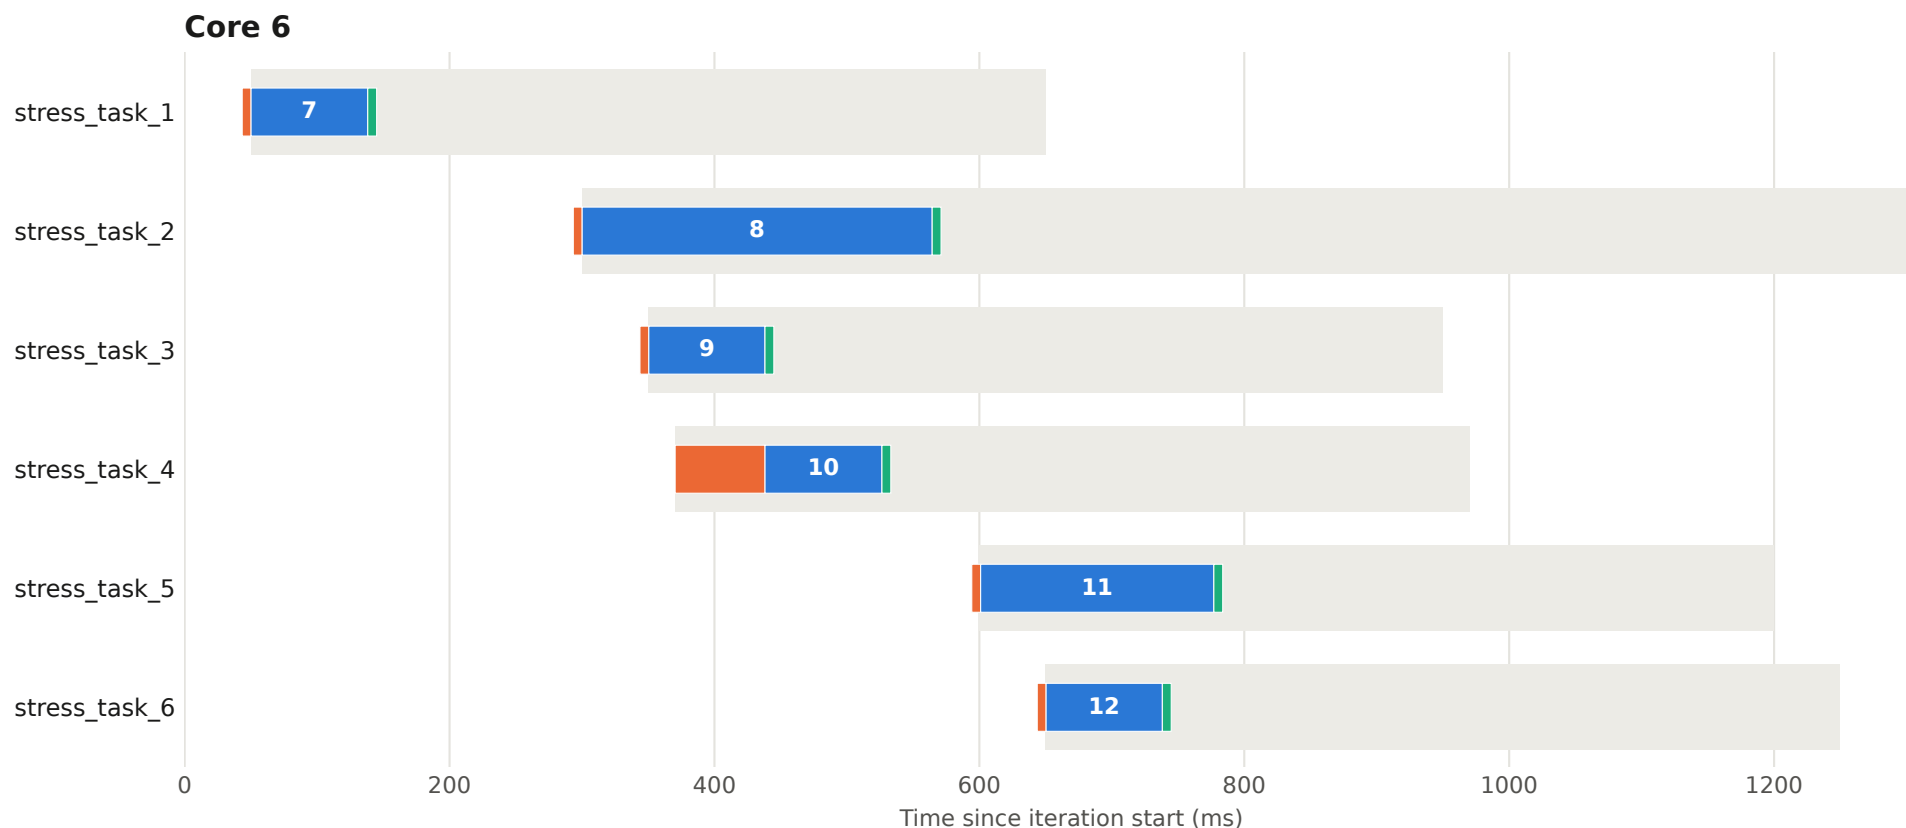


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 39 - core 7

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

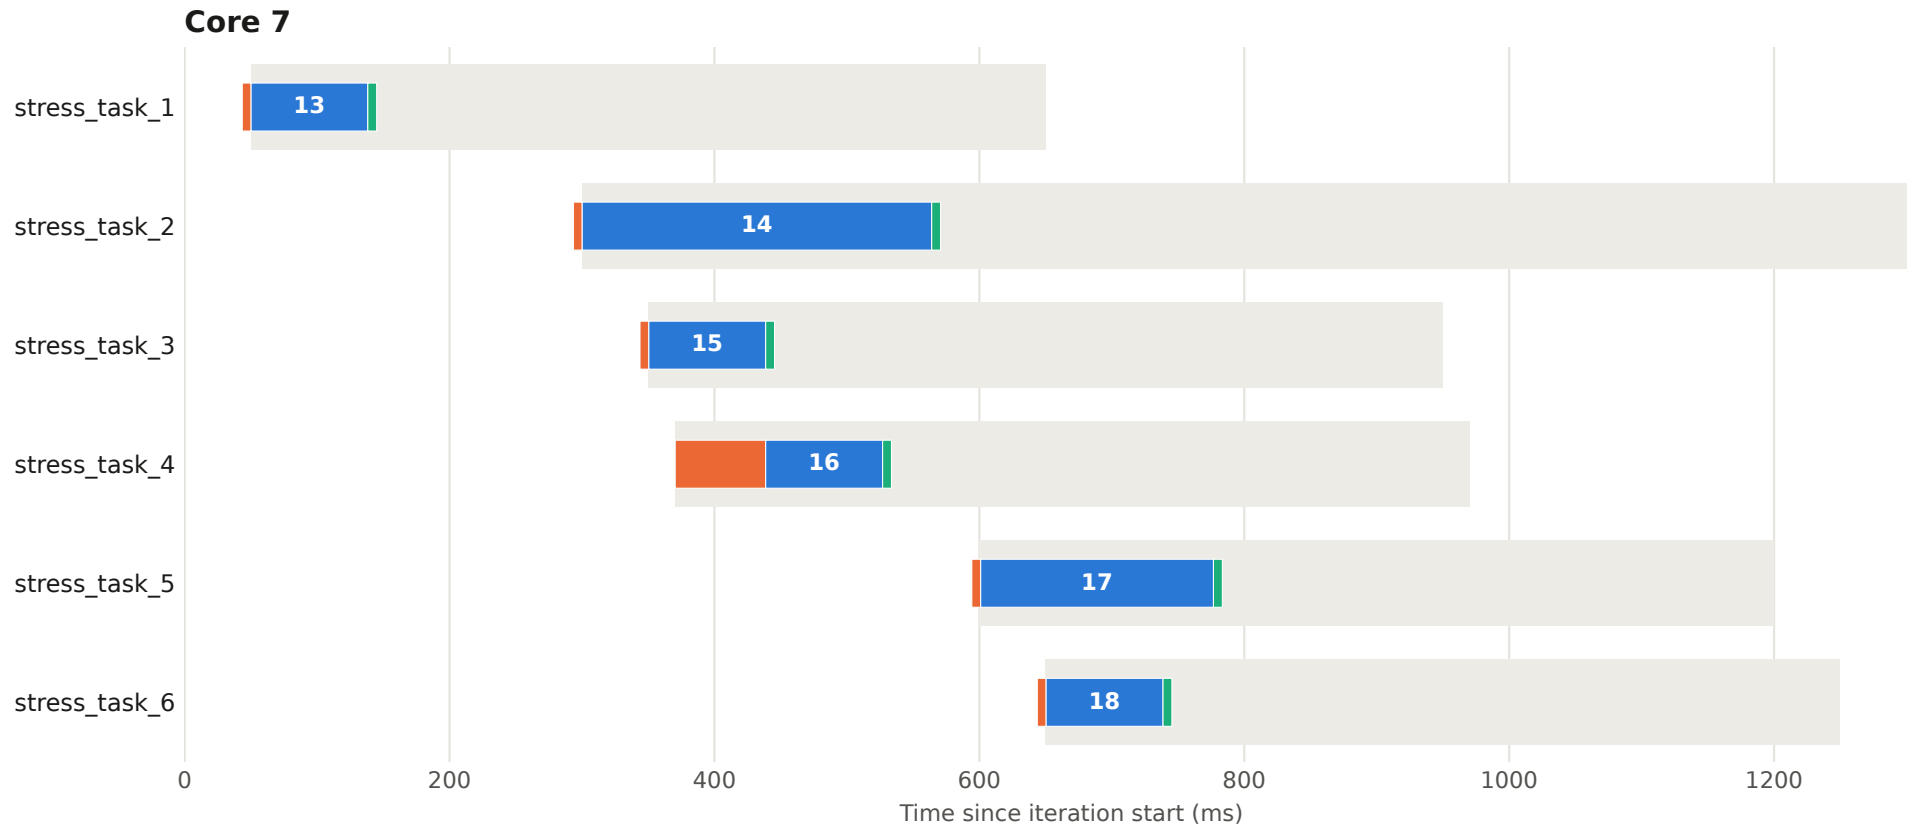

Execution plan - iteration 40 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

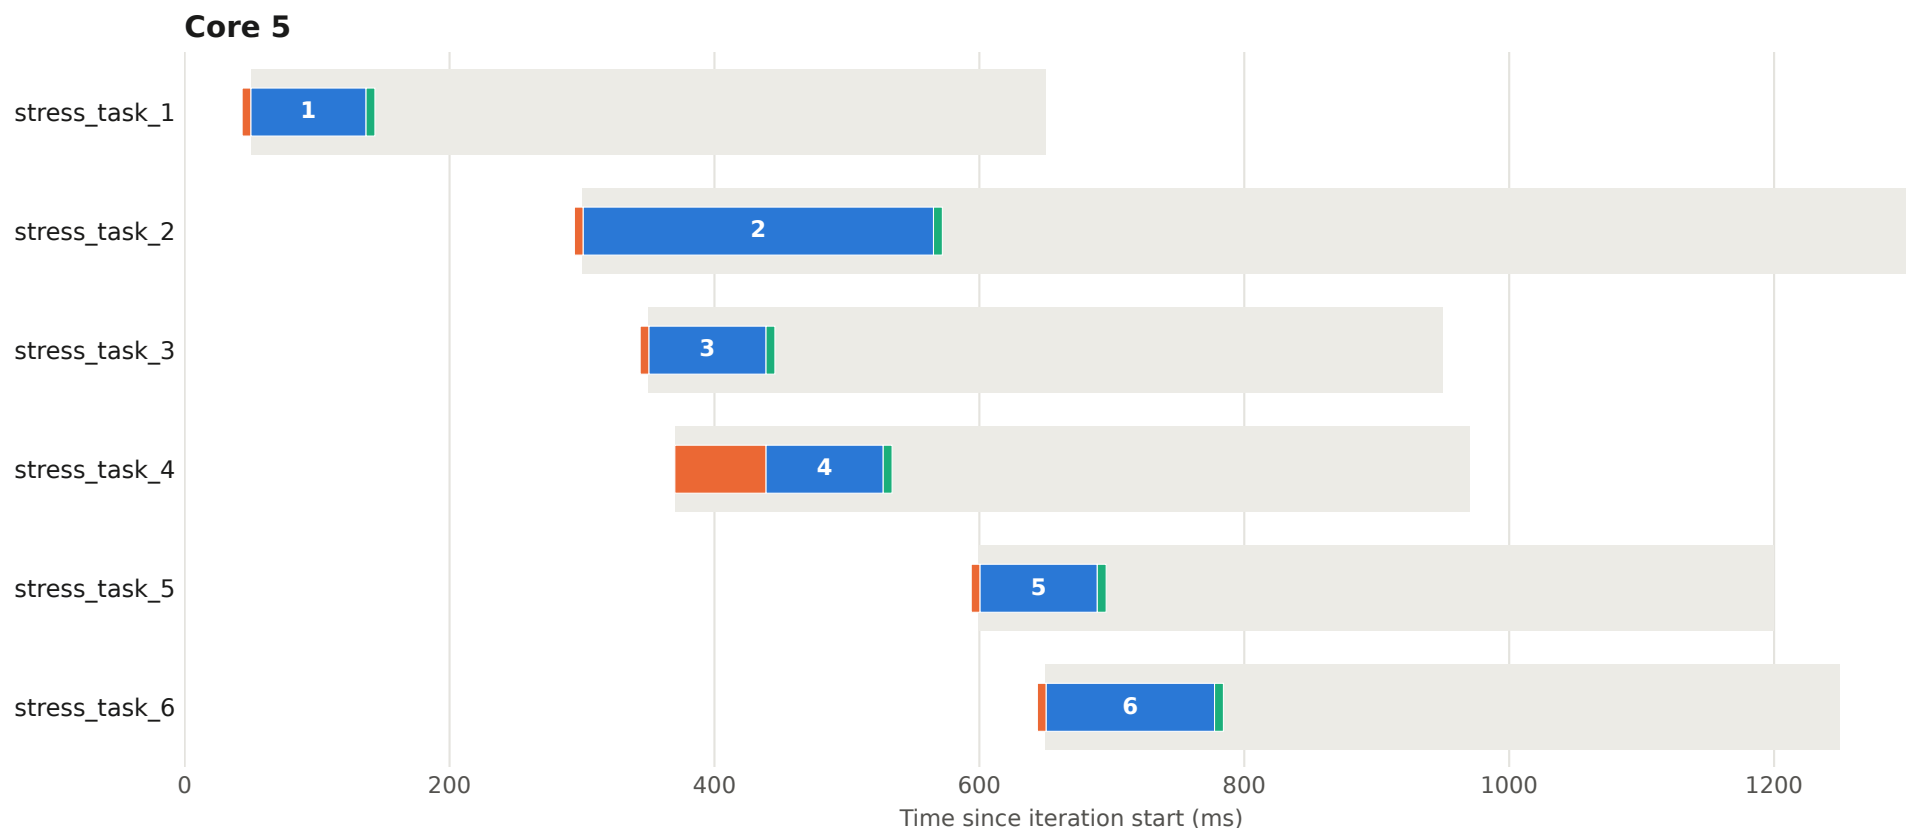


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 40 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

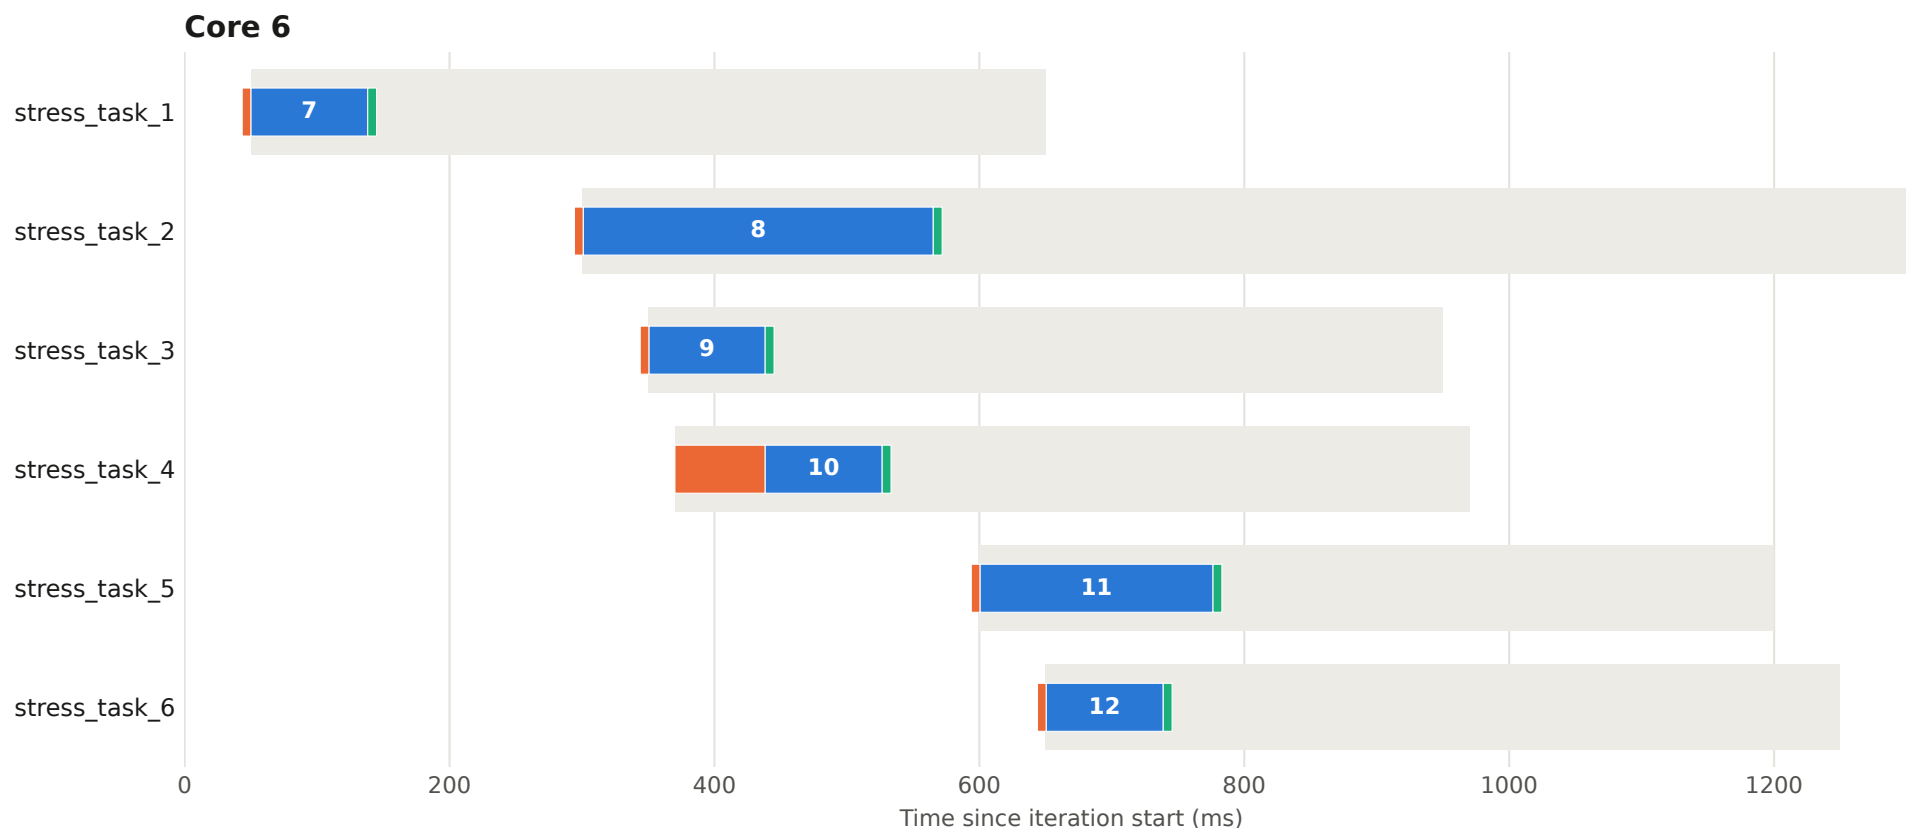


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 40 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

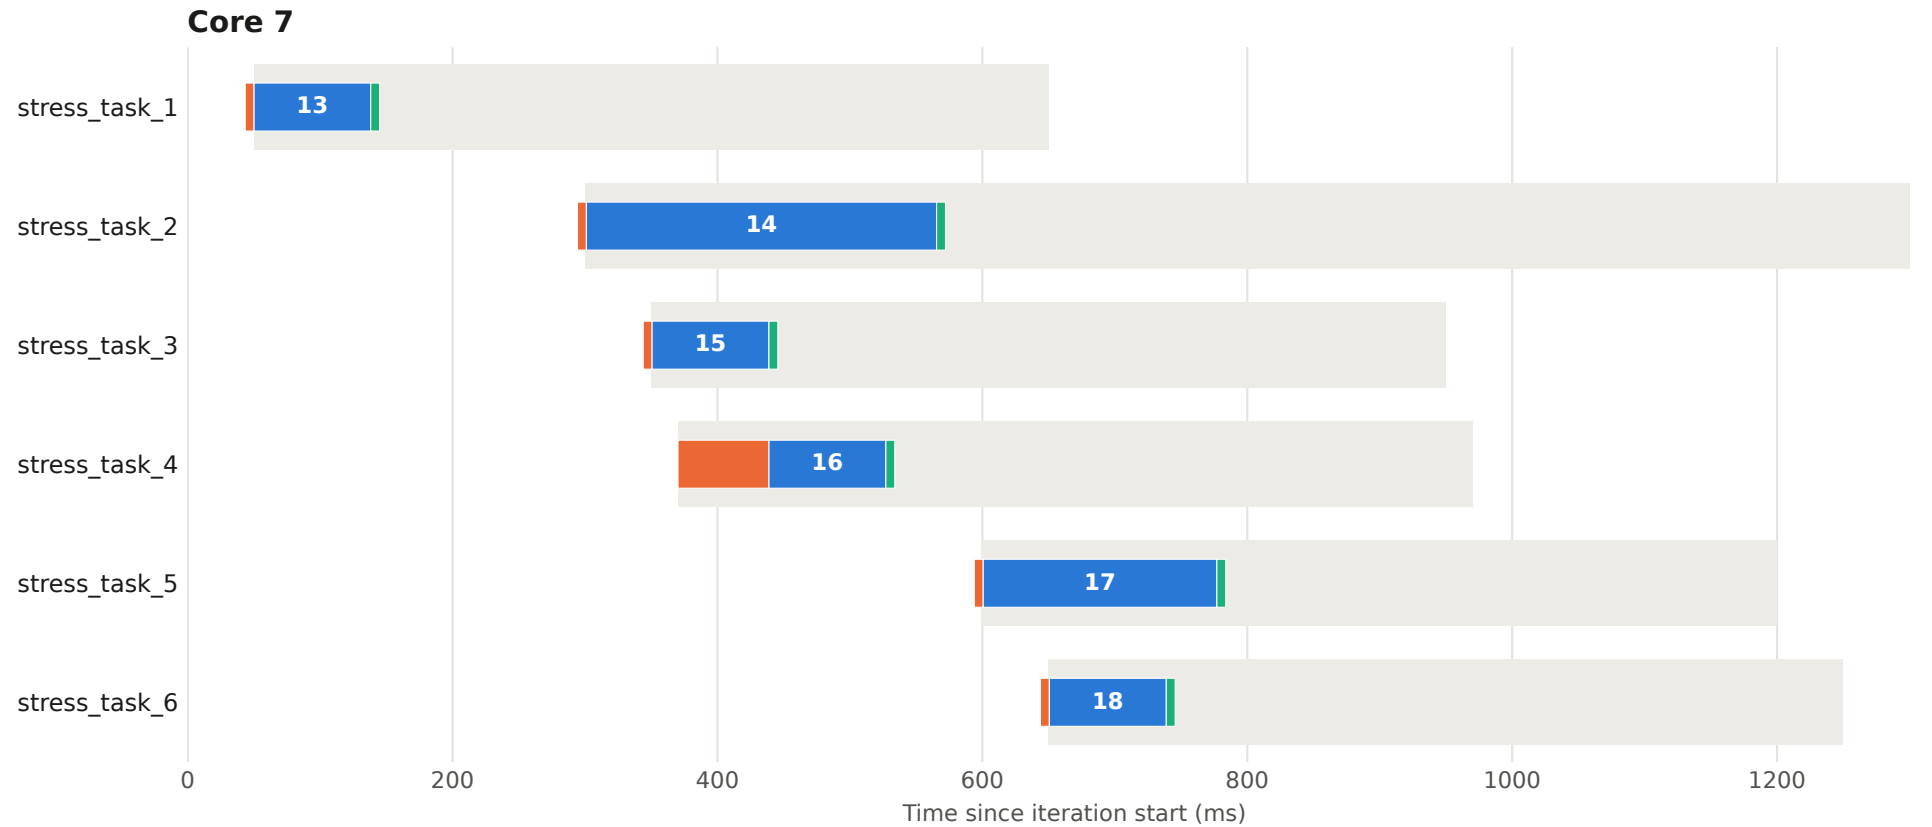


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 41 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

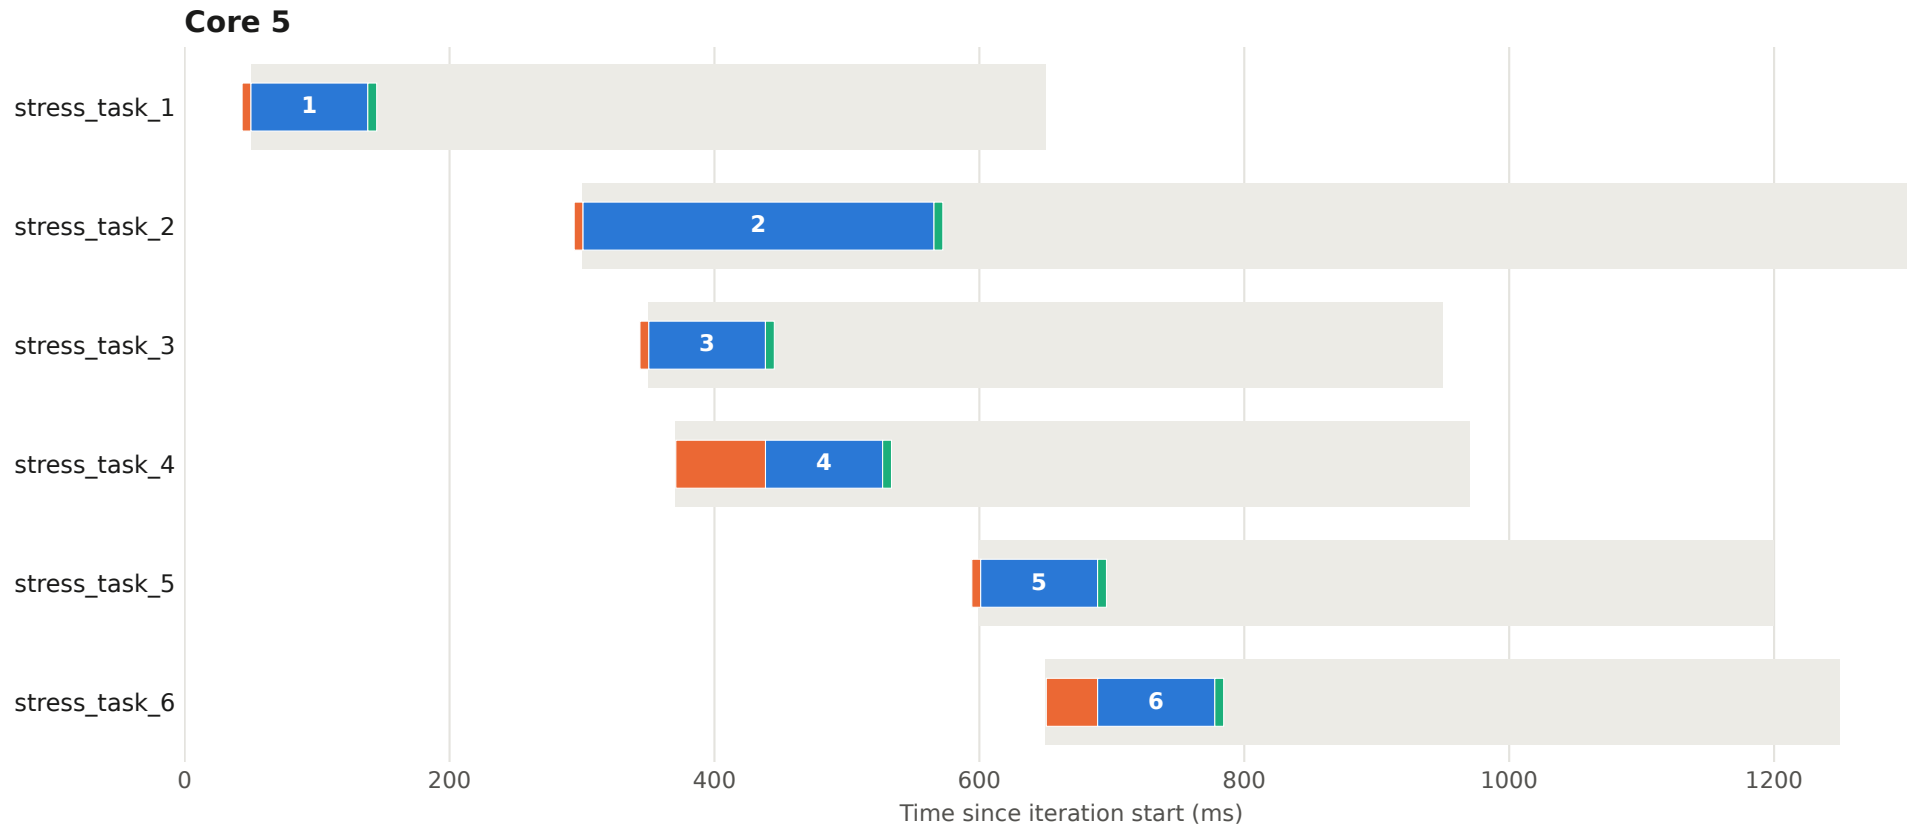


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 41 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

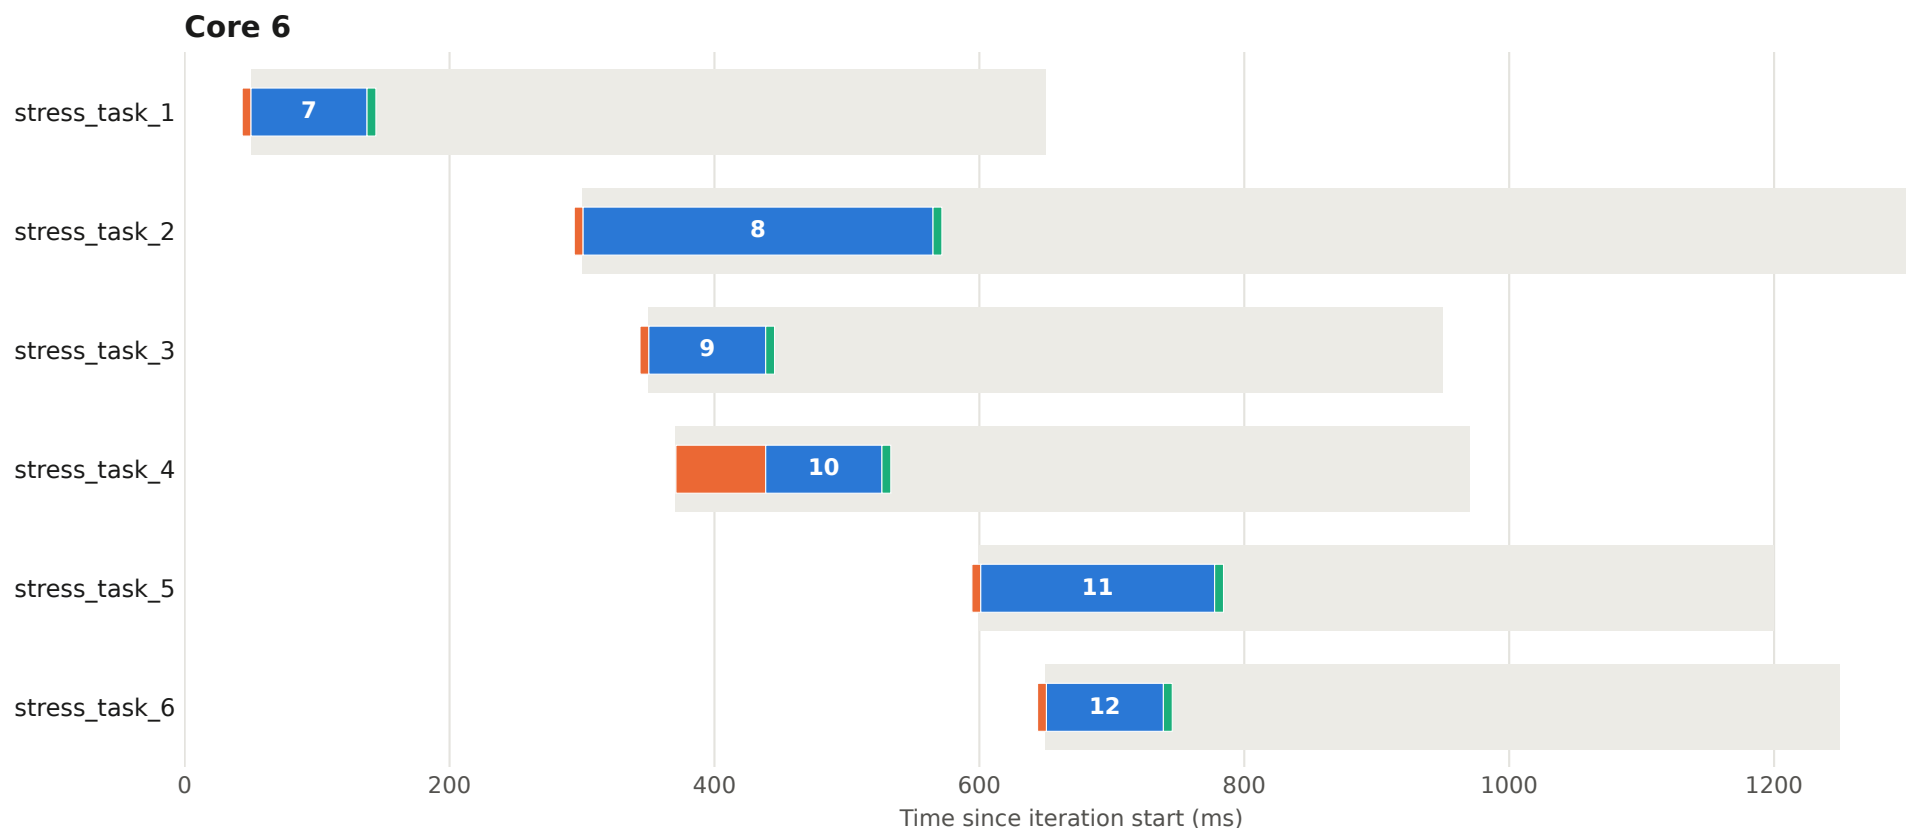


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 41 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

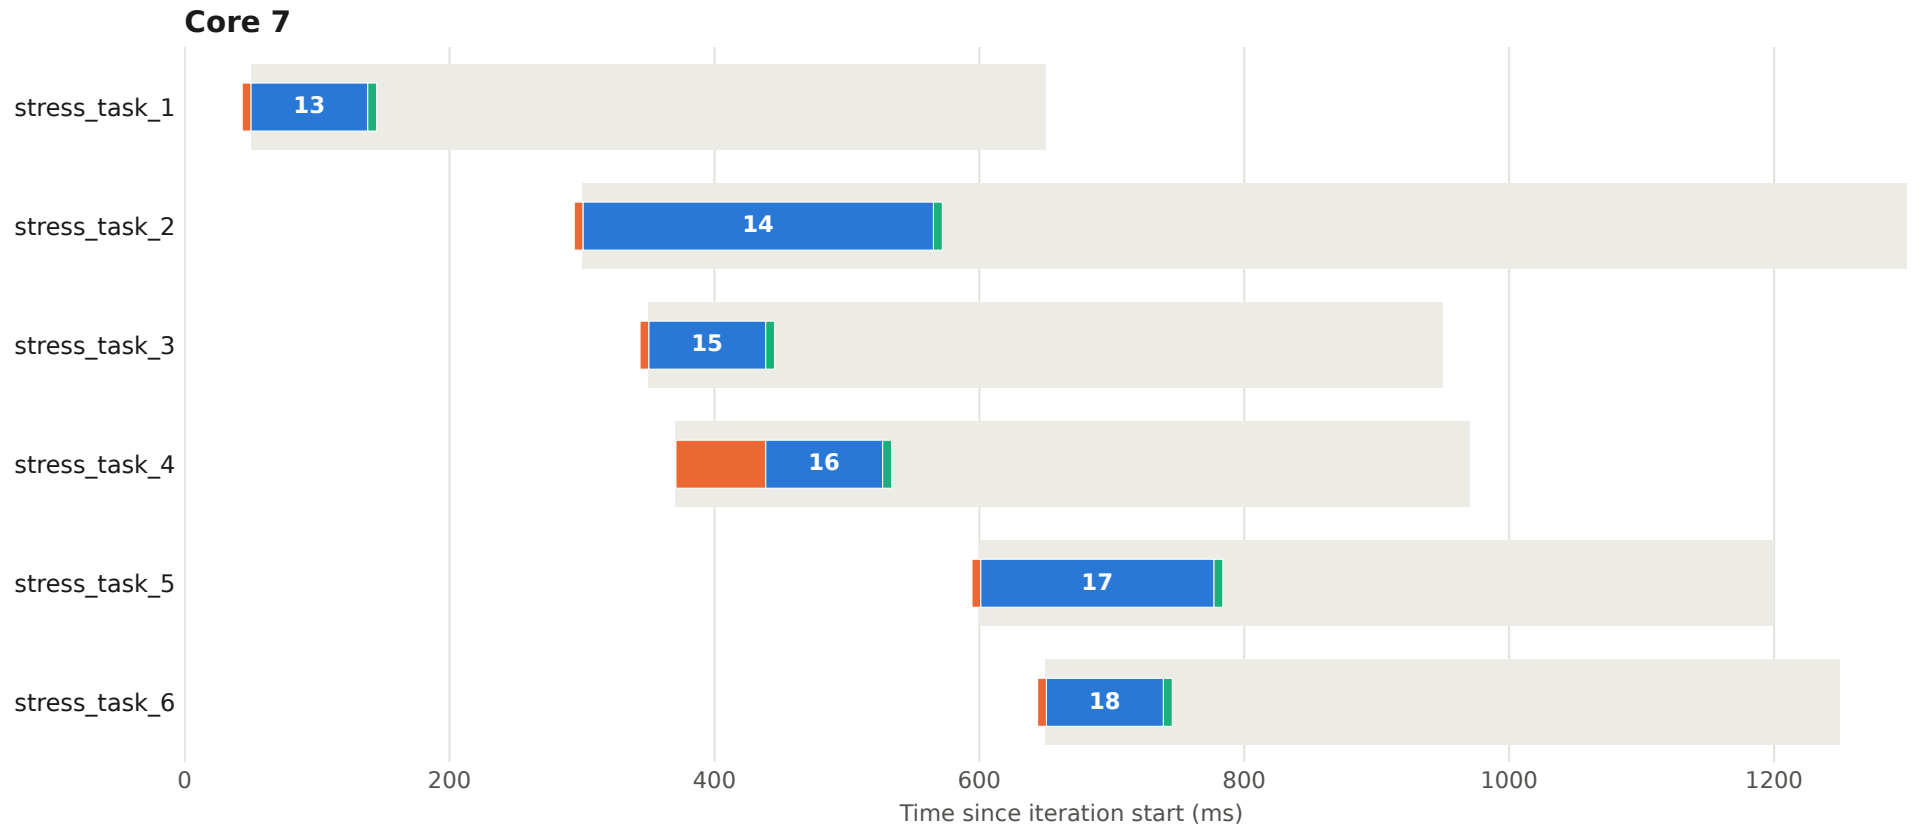


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 42 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

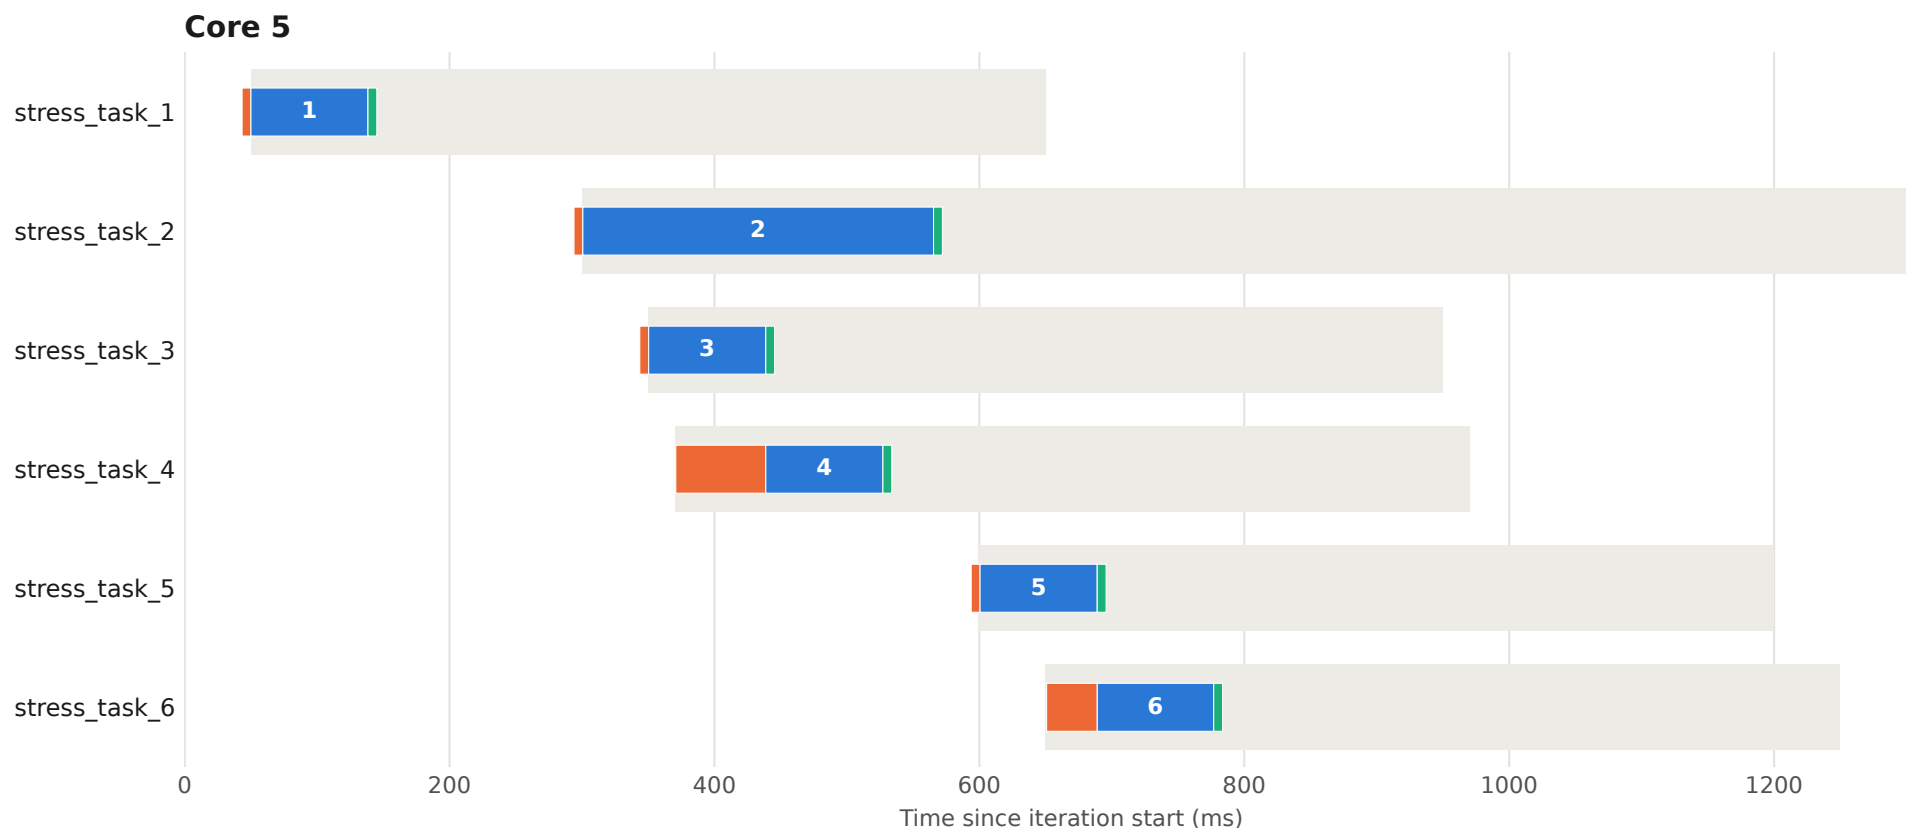


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 42 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

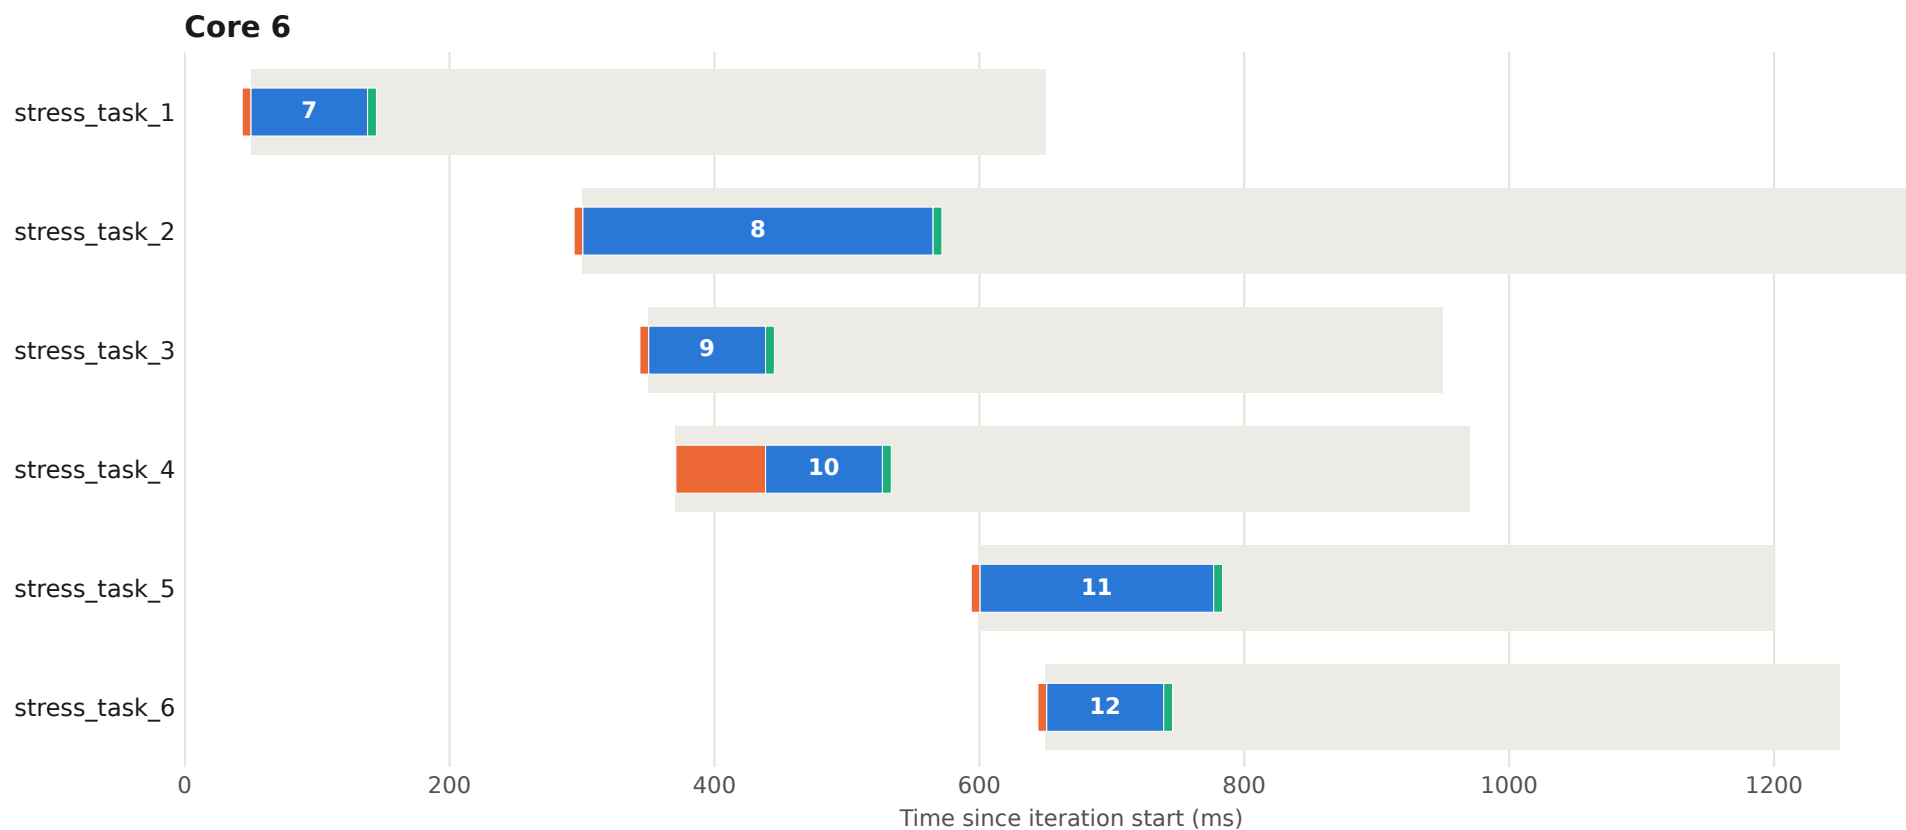


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 42 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

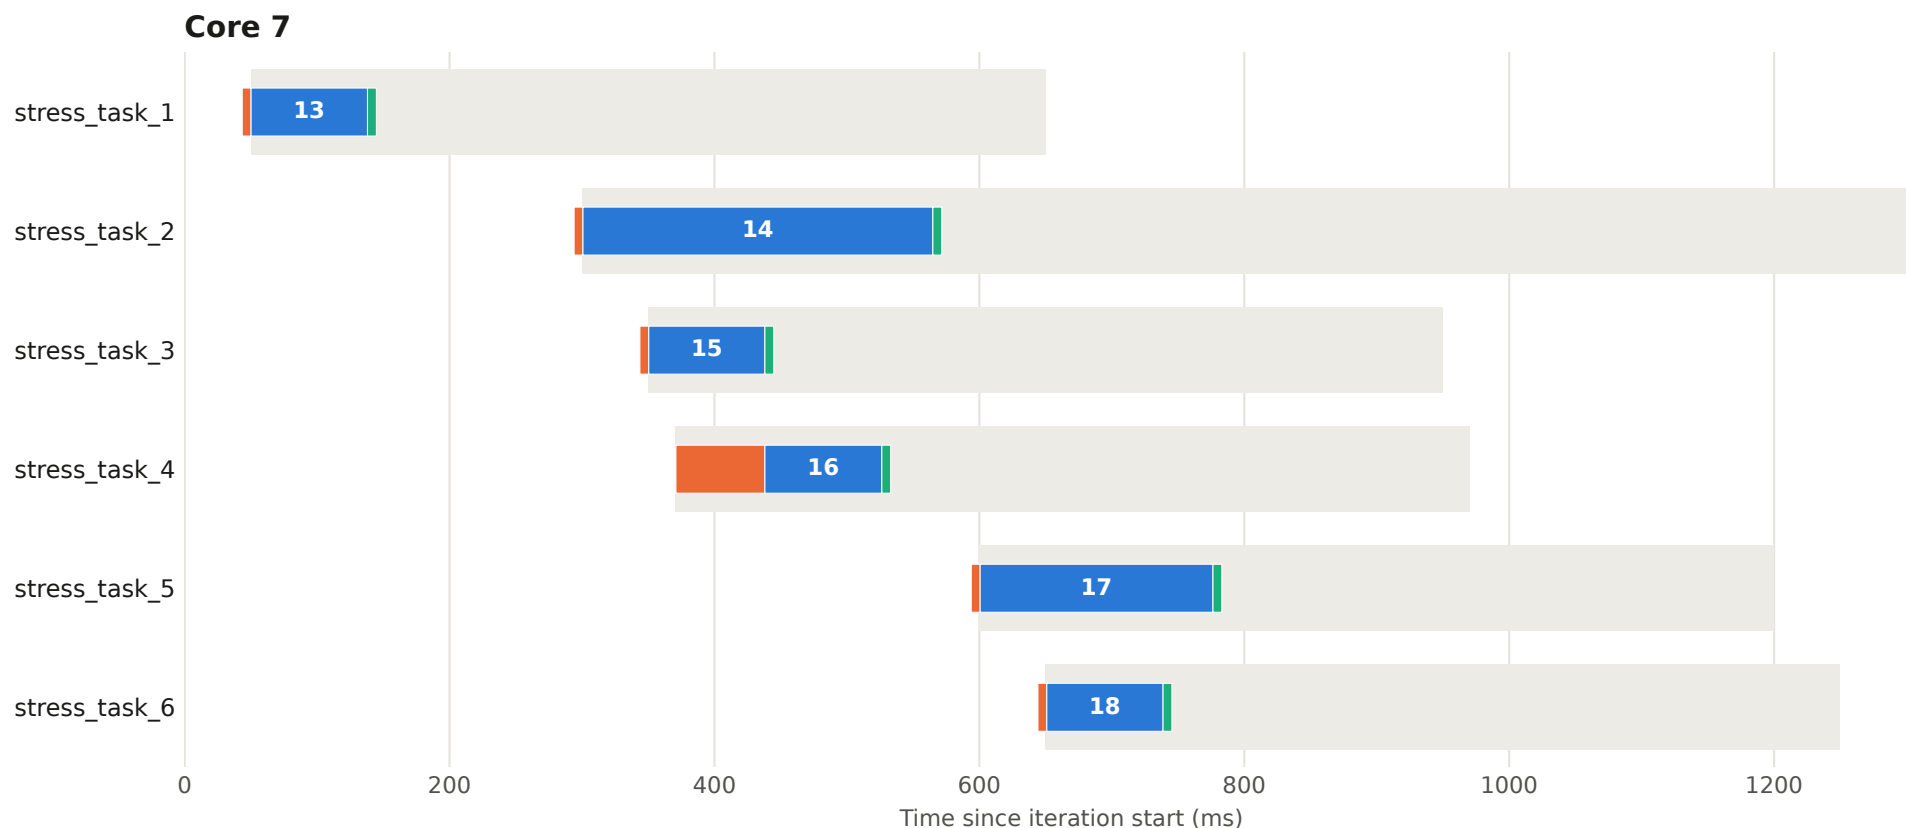


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 43 - core 5

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

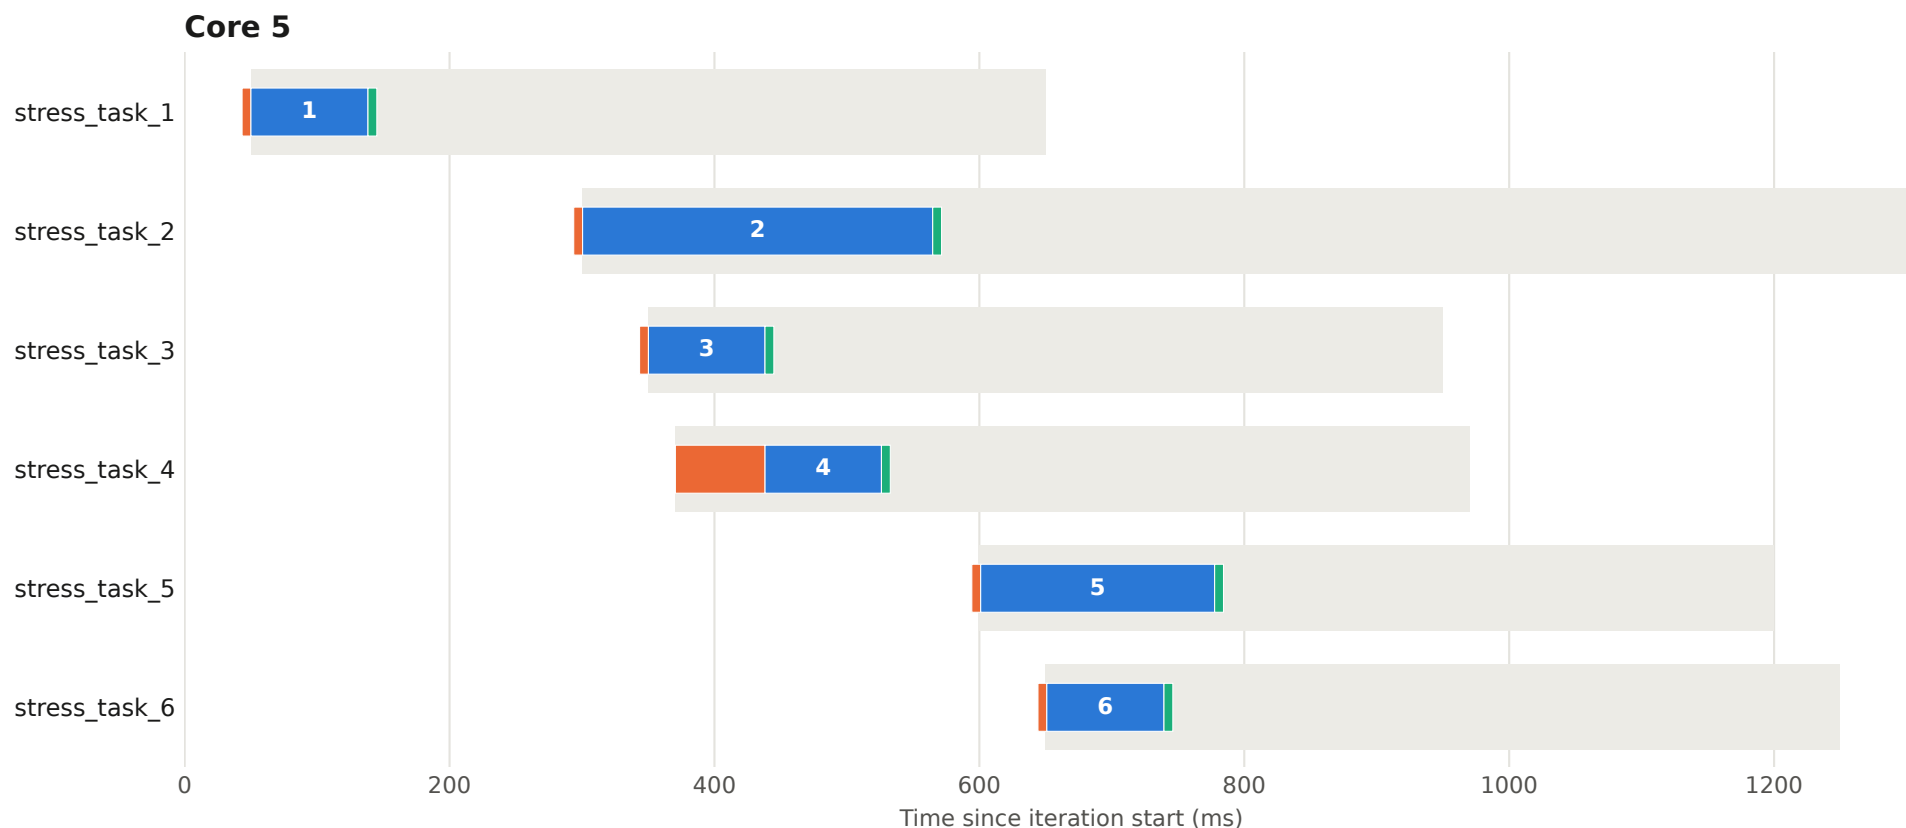

Execution plan - iteration 43 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

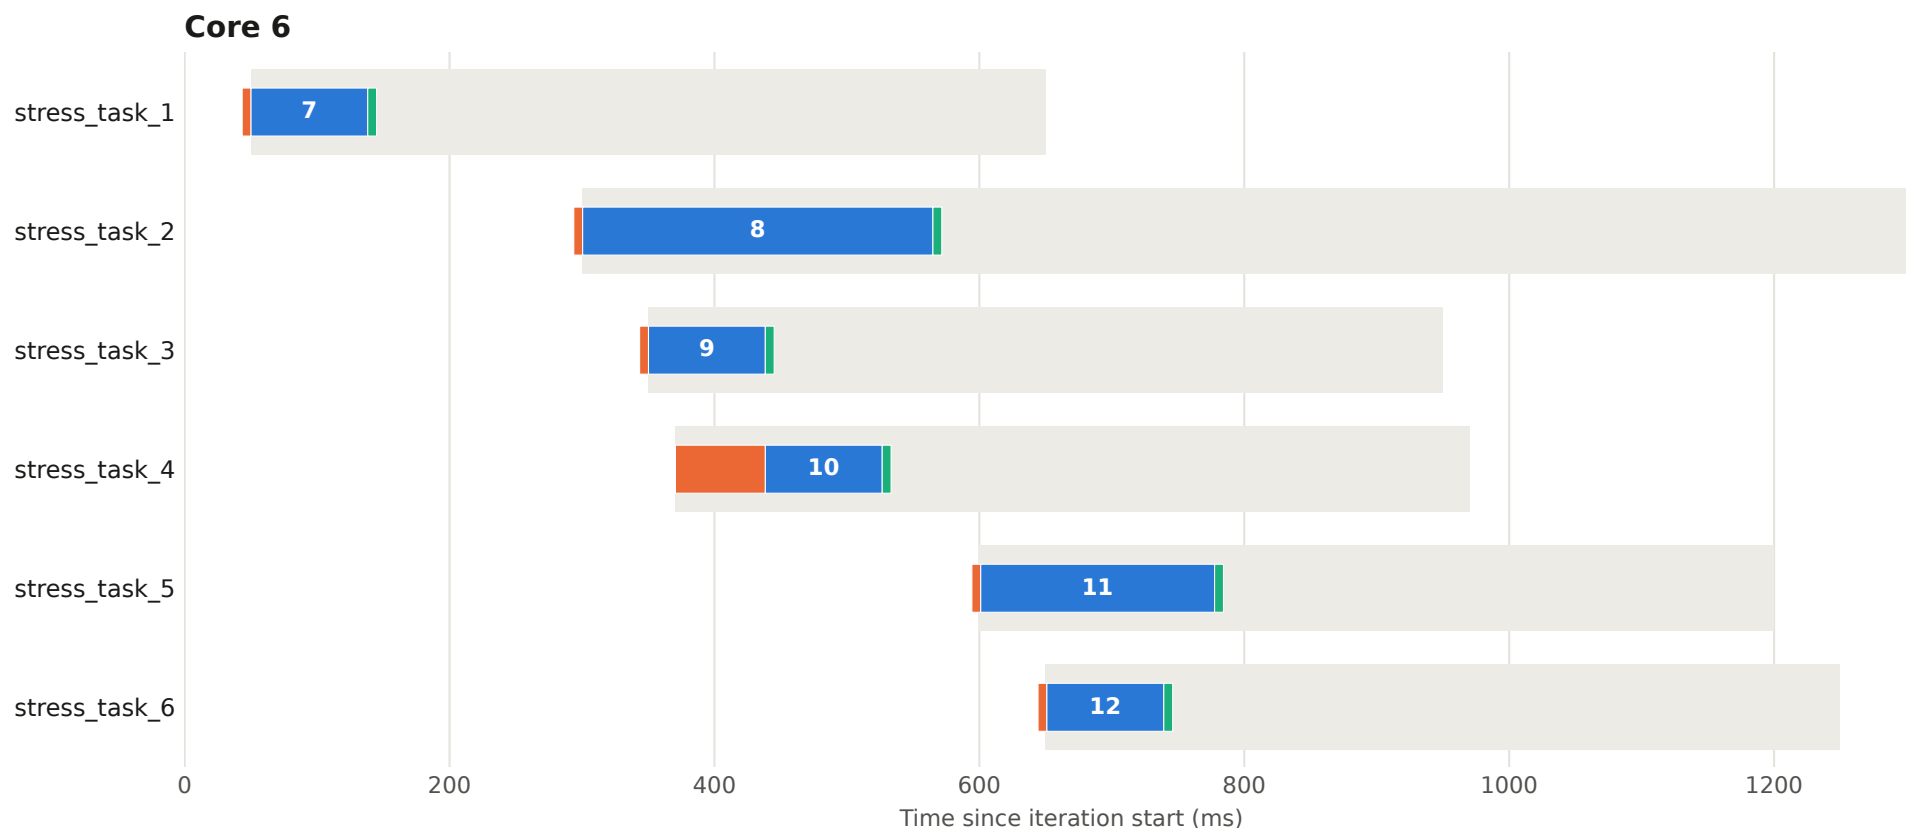


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 43 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

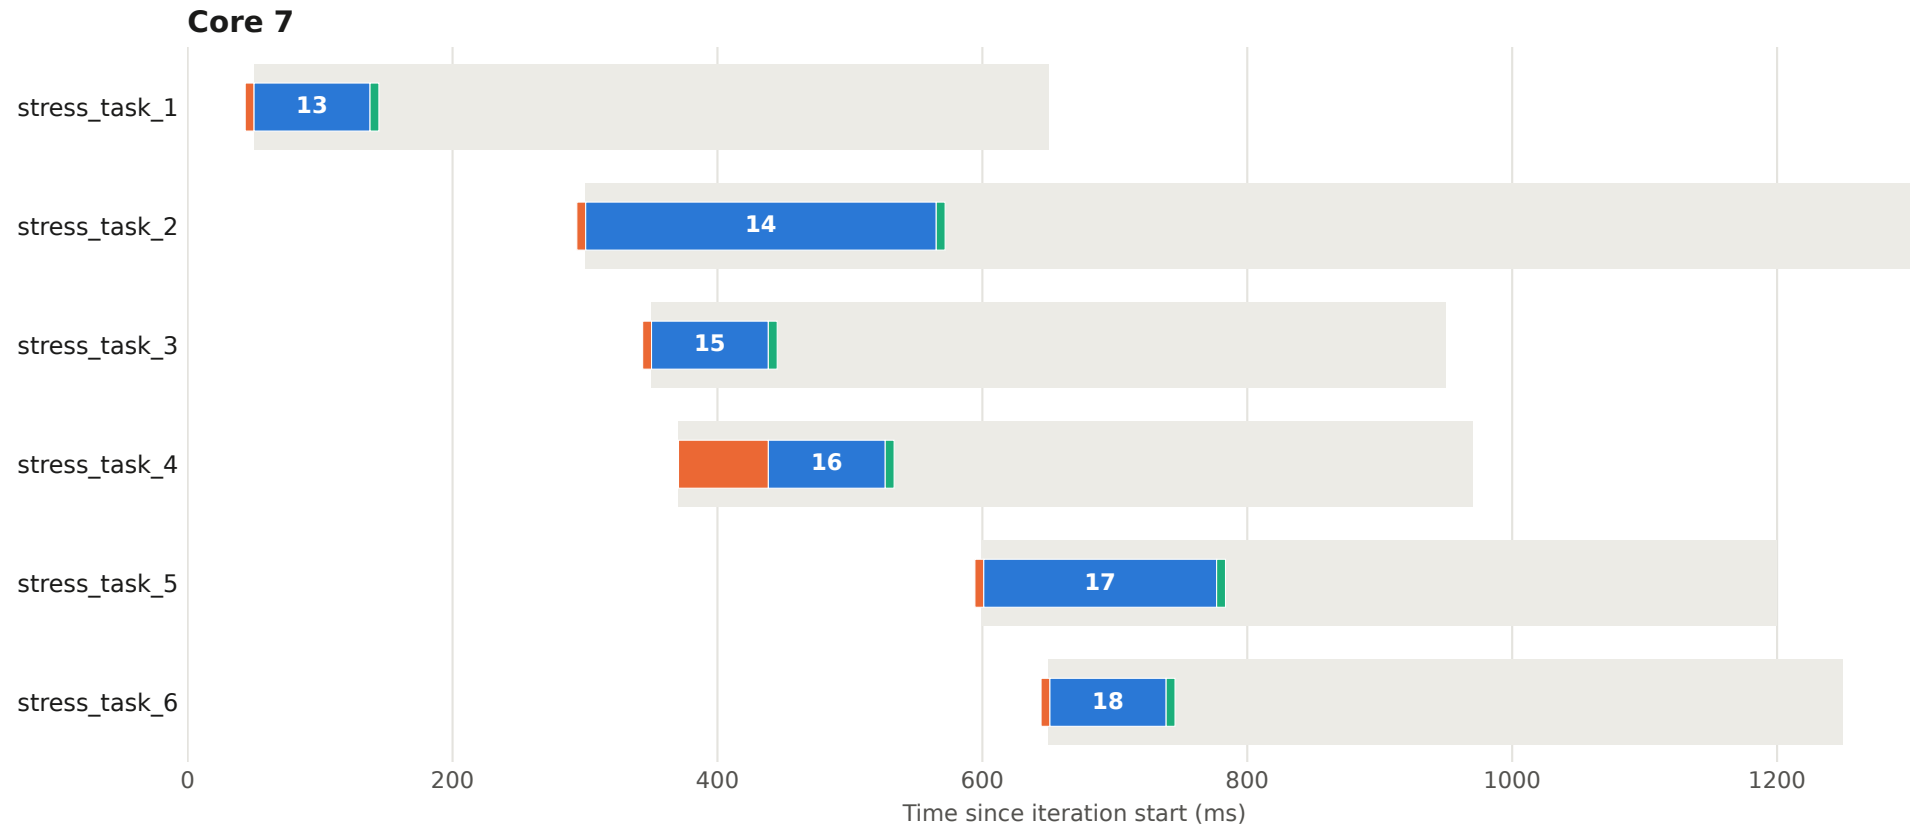


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 44 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

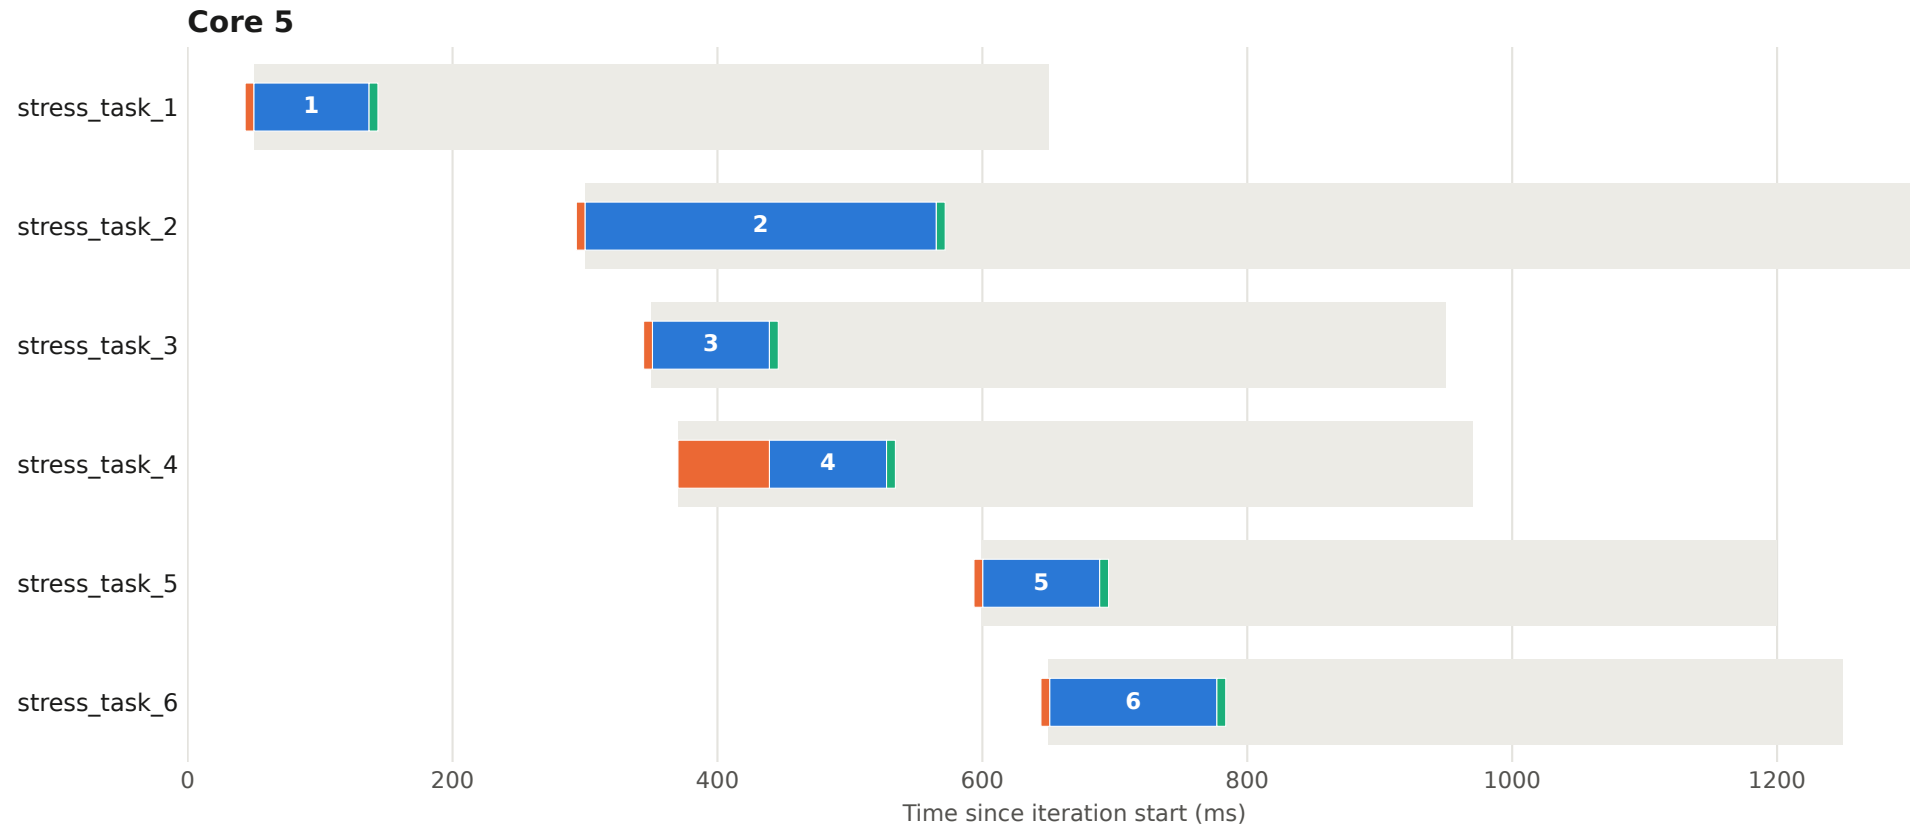


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 44 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

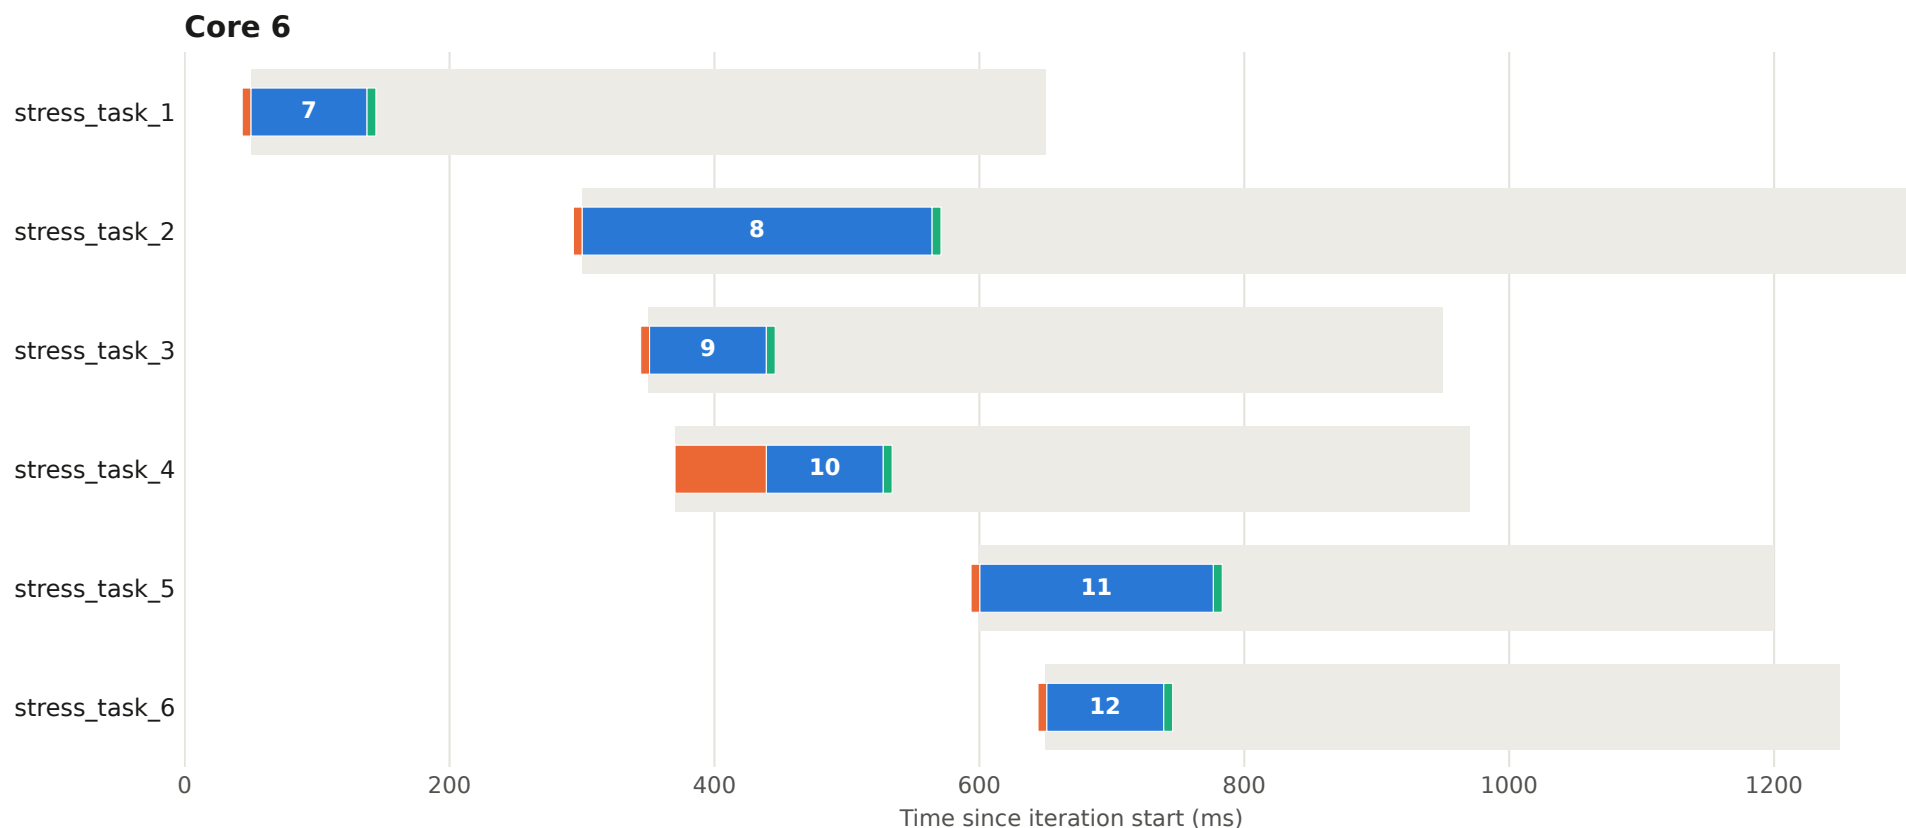


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 44 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

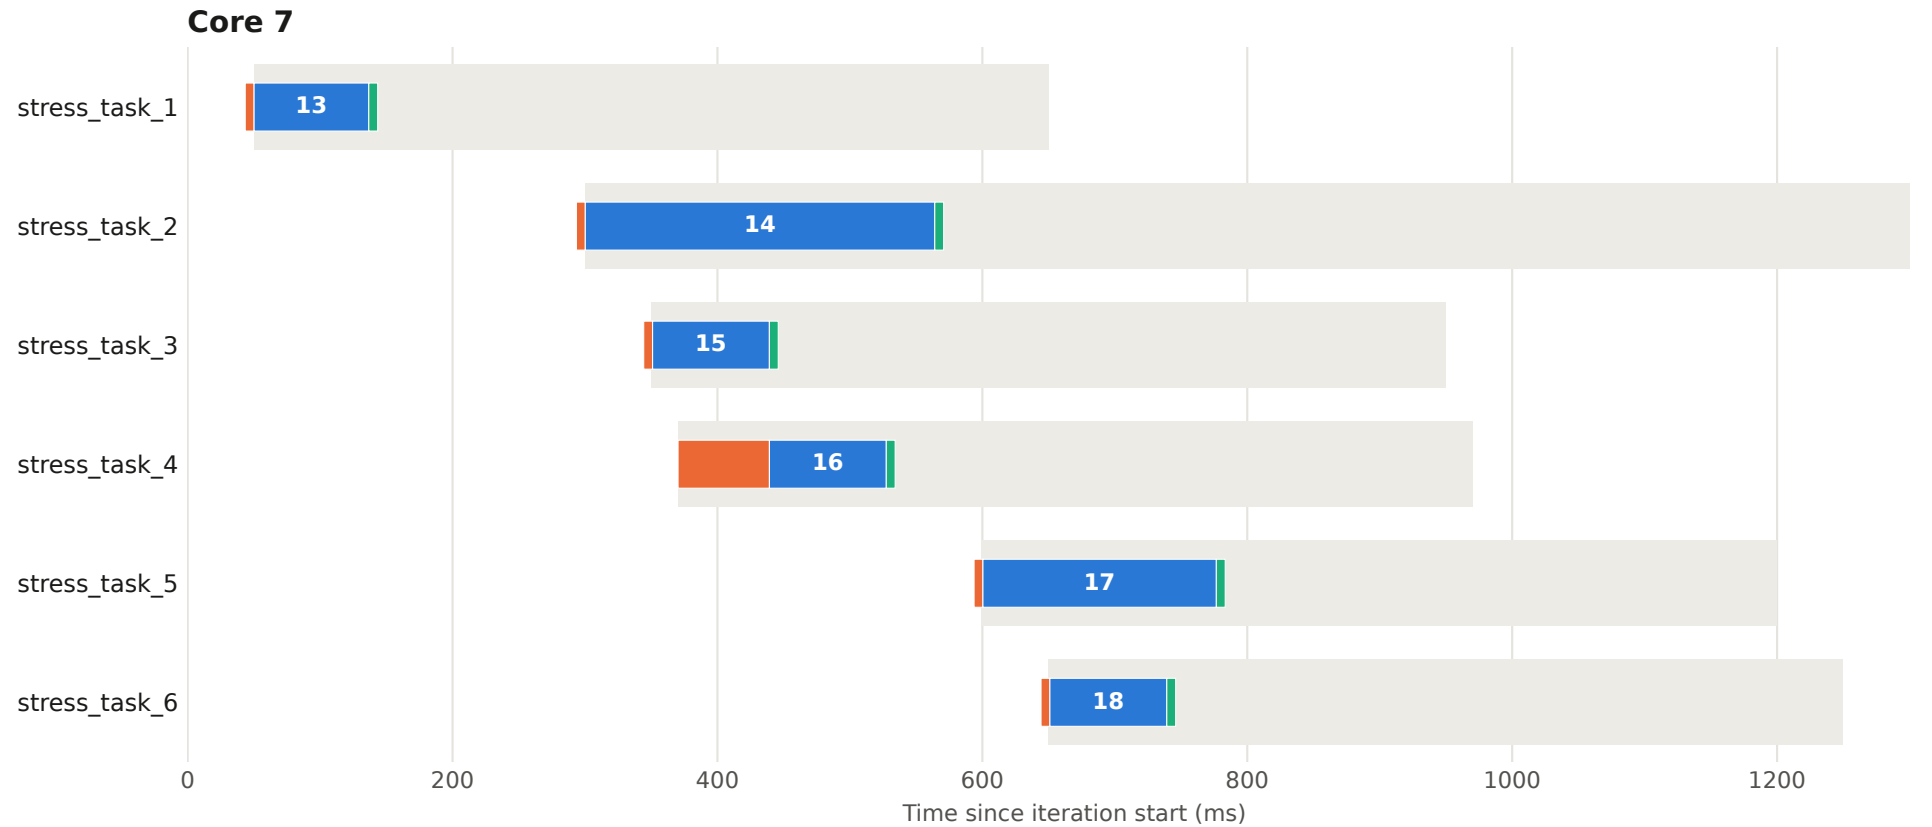


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 45 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

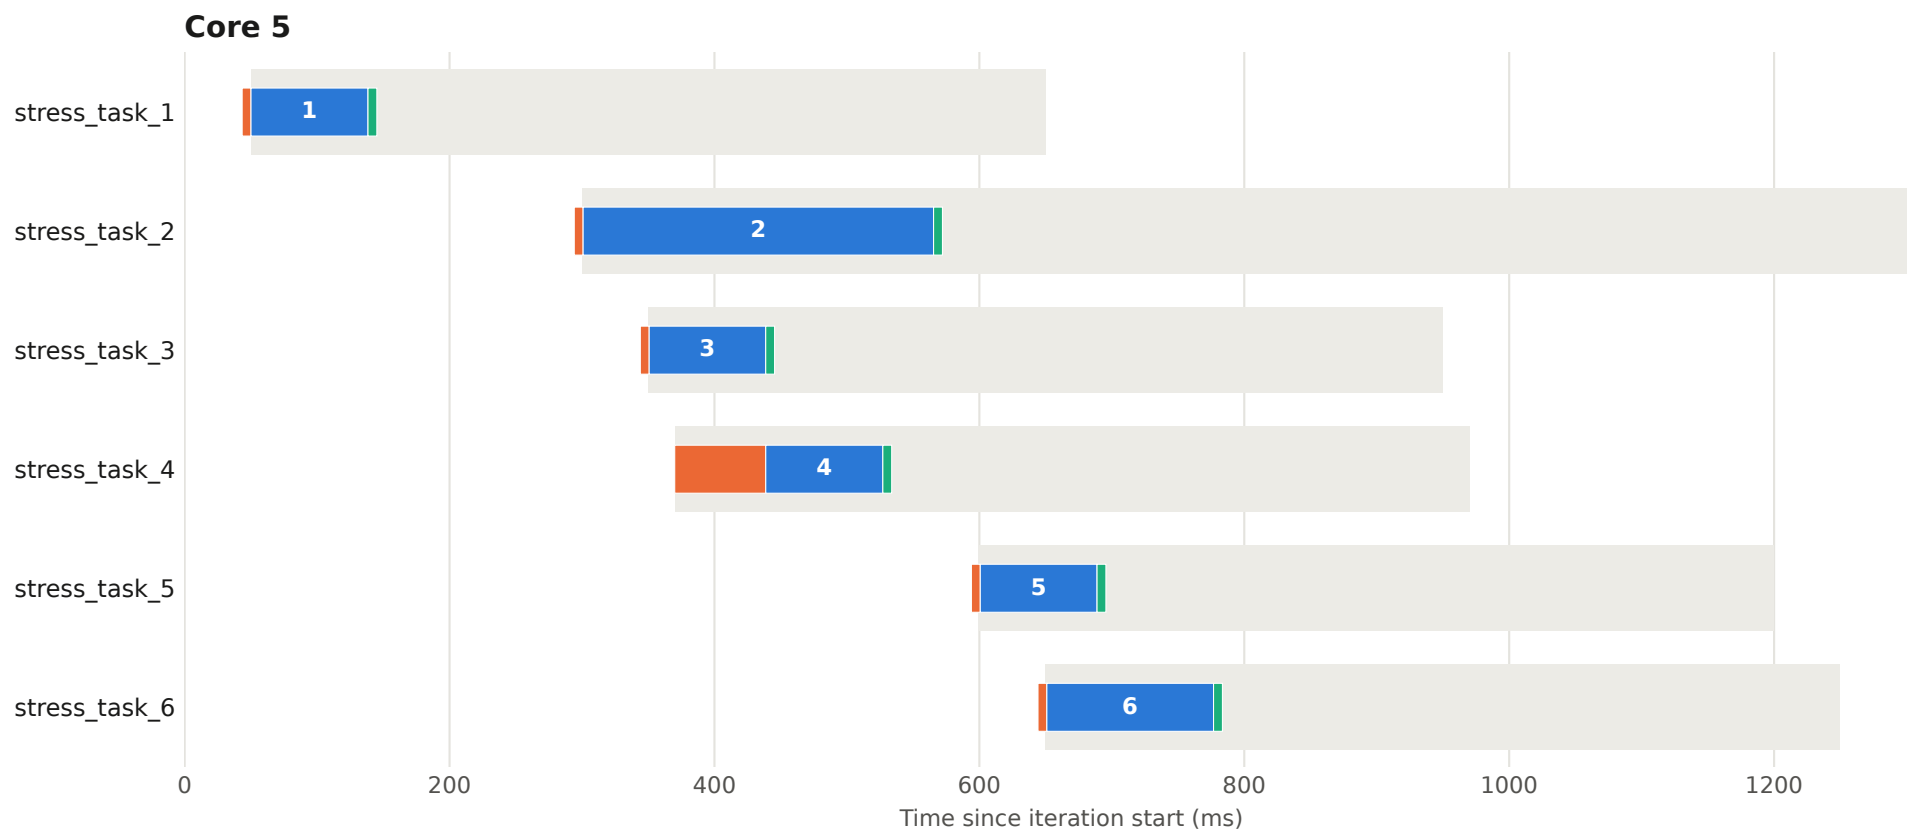


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 45 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

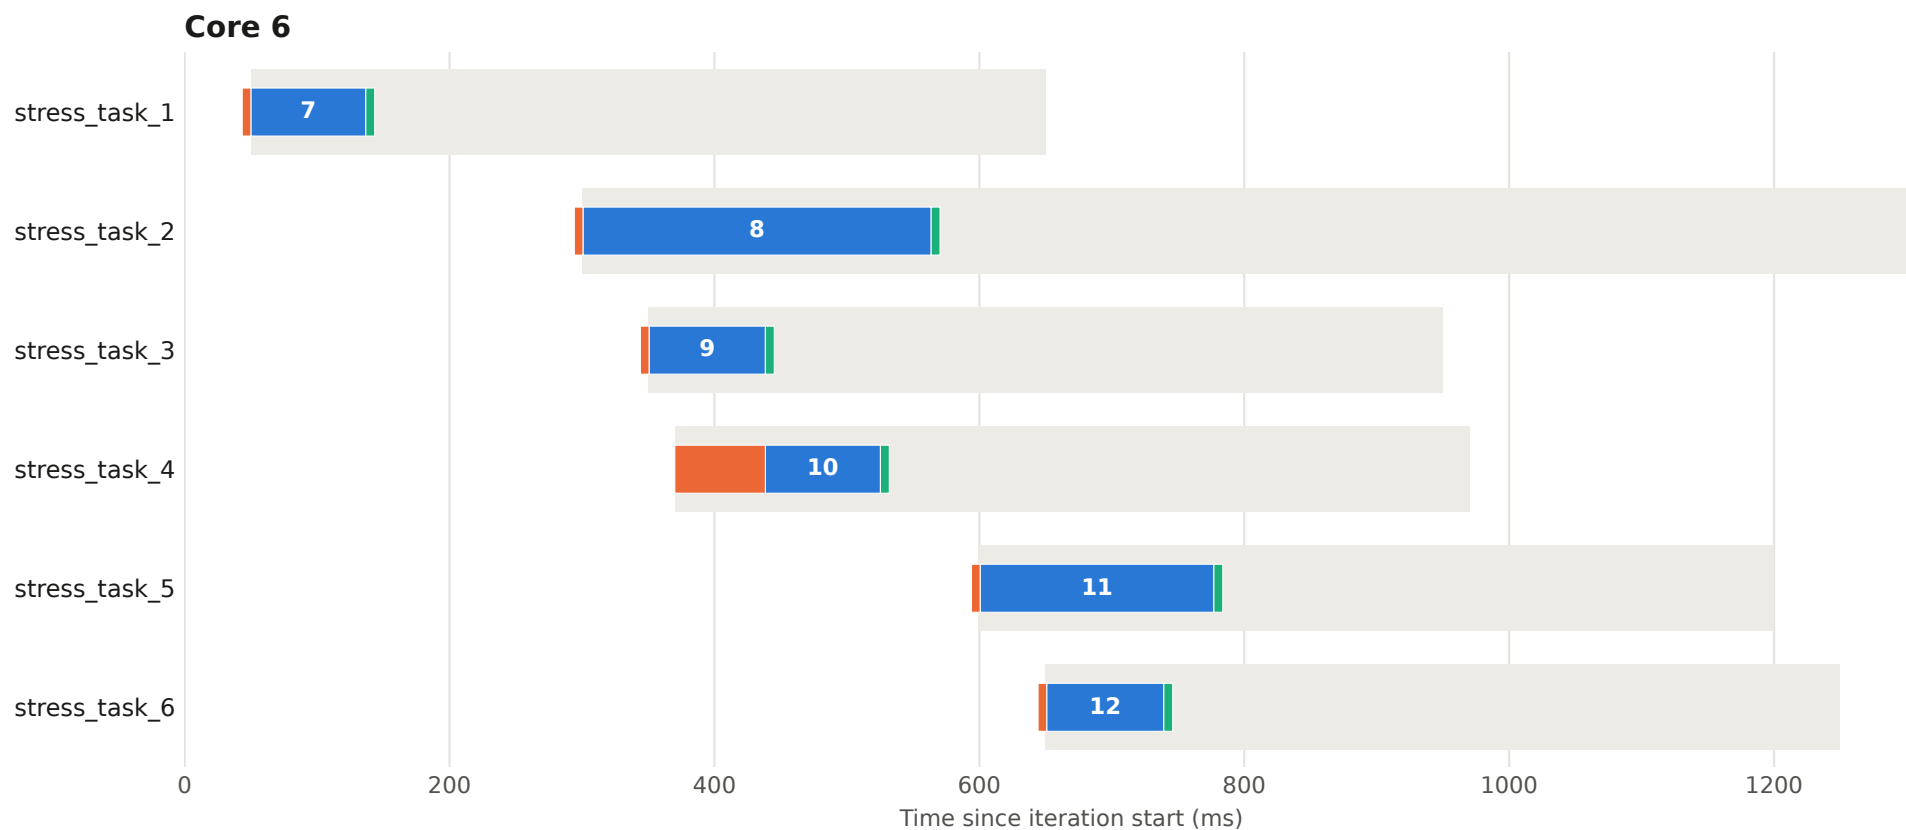


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 45 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

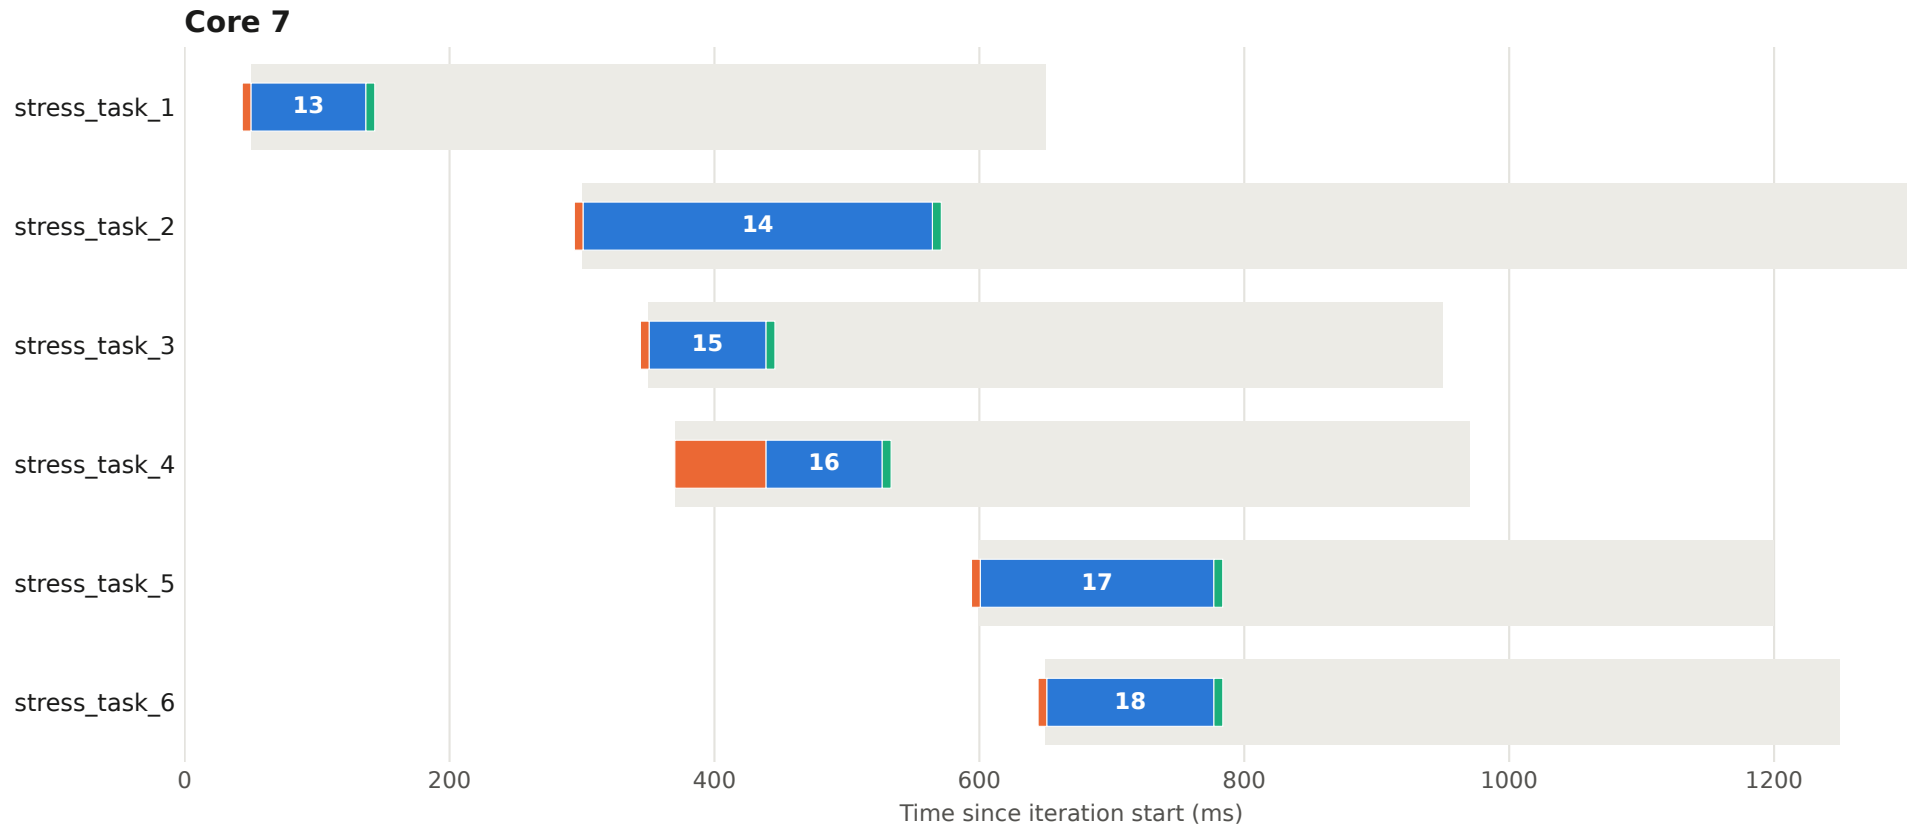


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 46 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

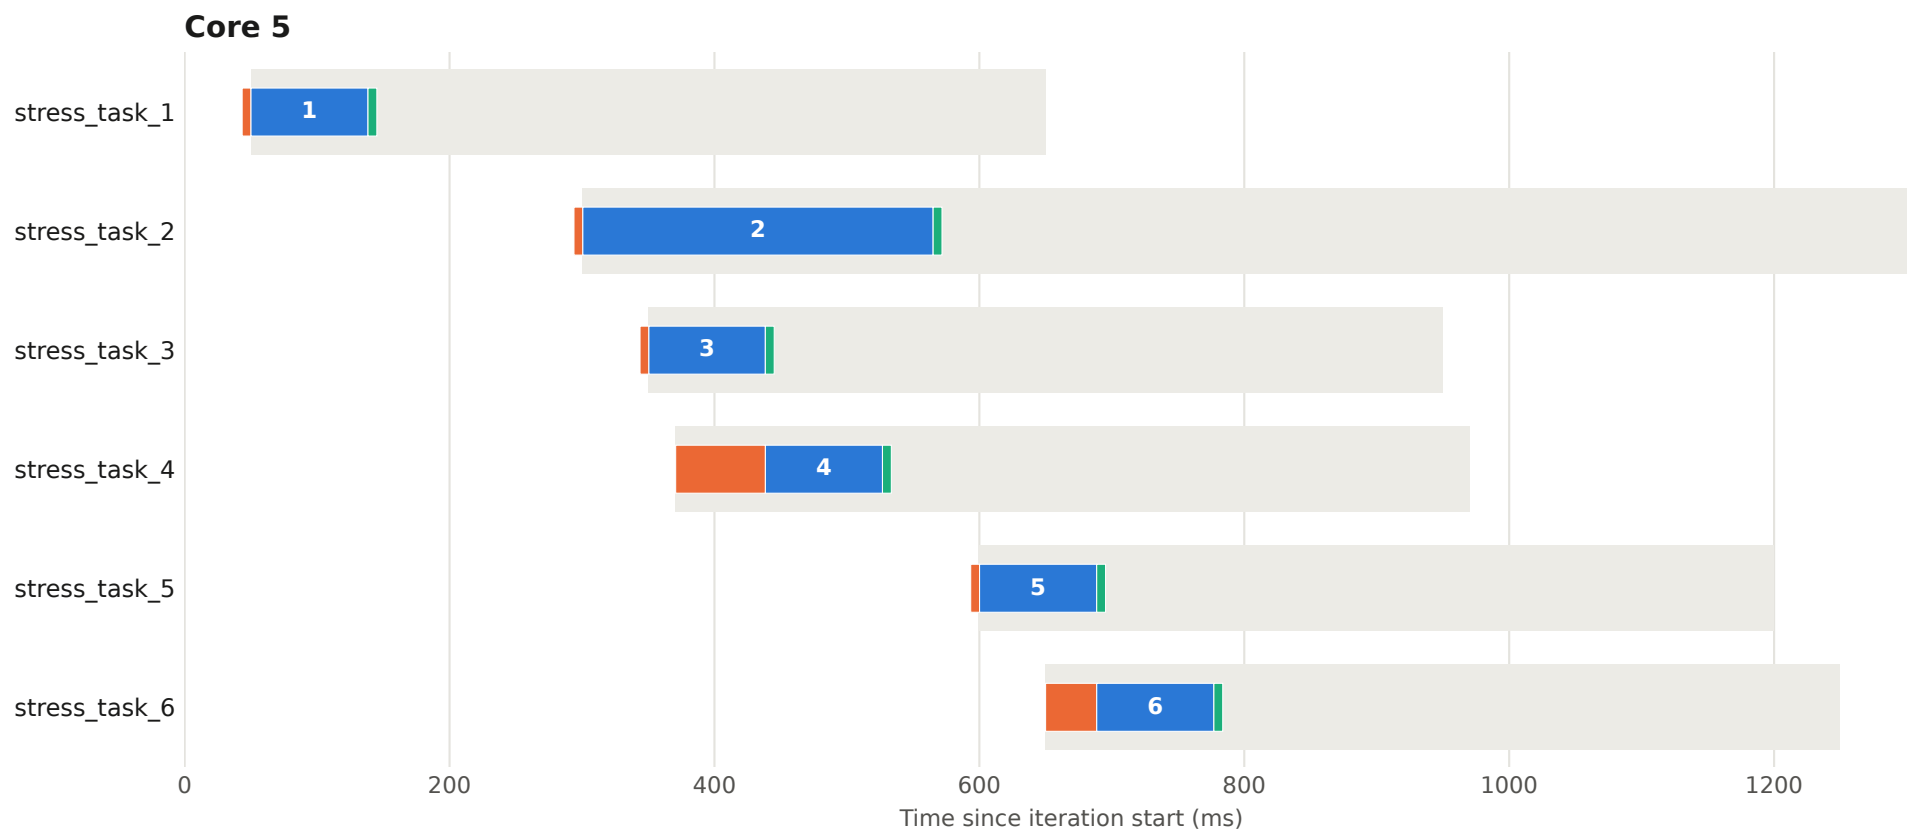


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 46 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

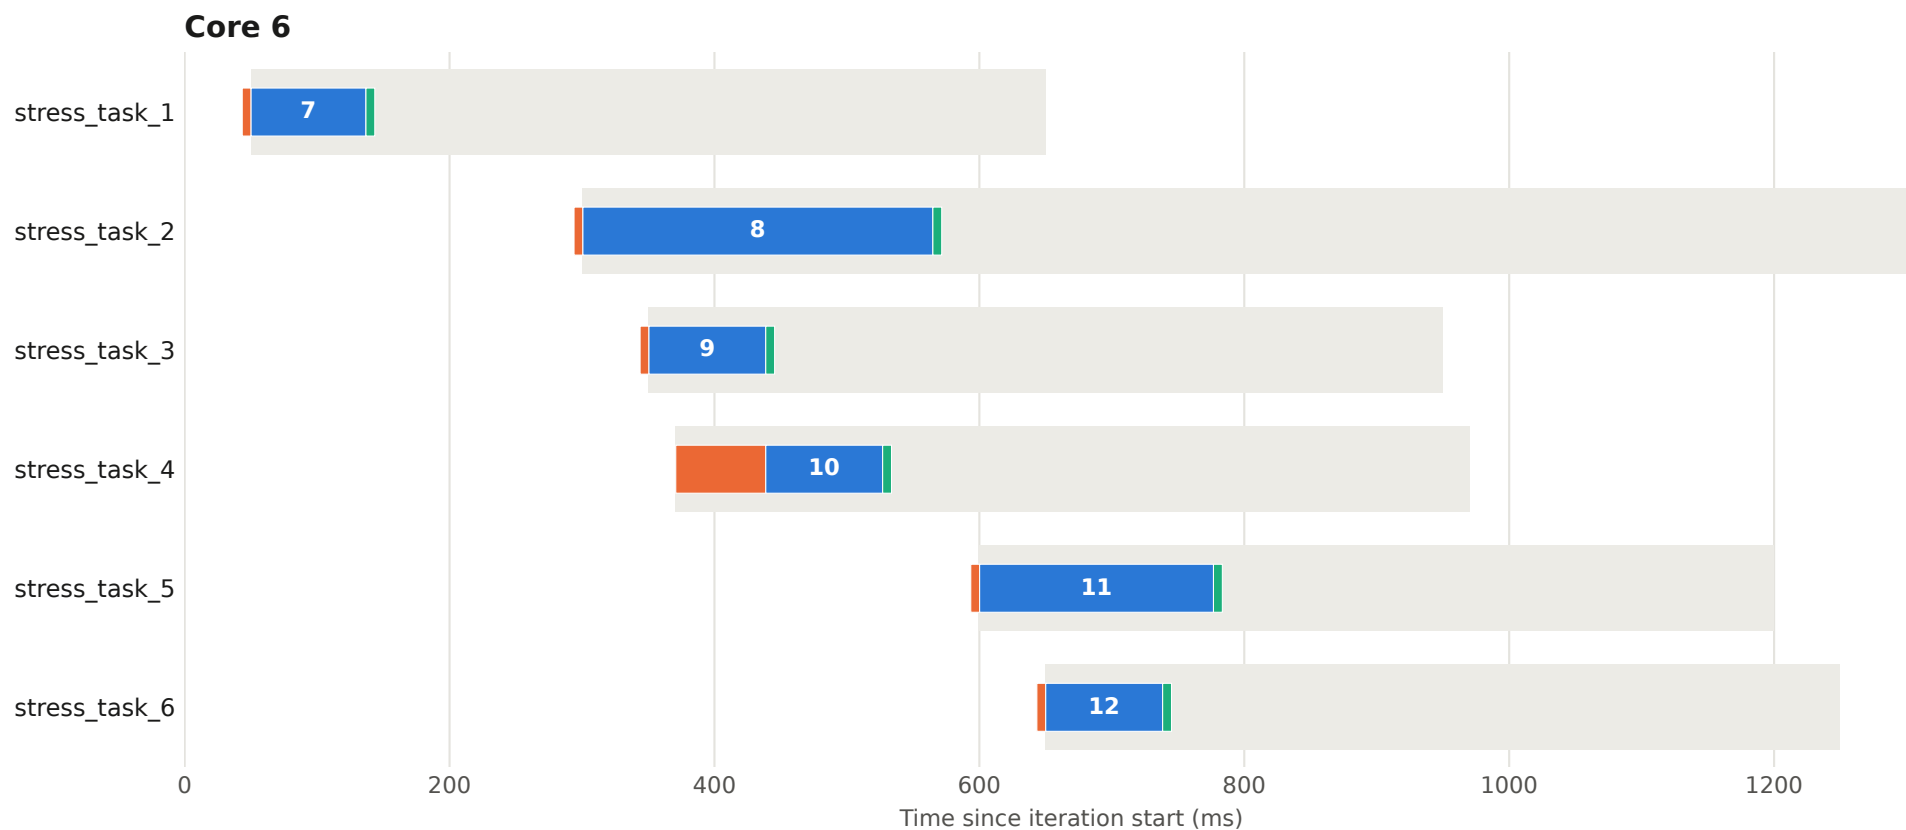


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 46 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

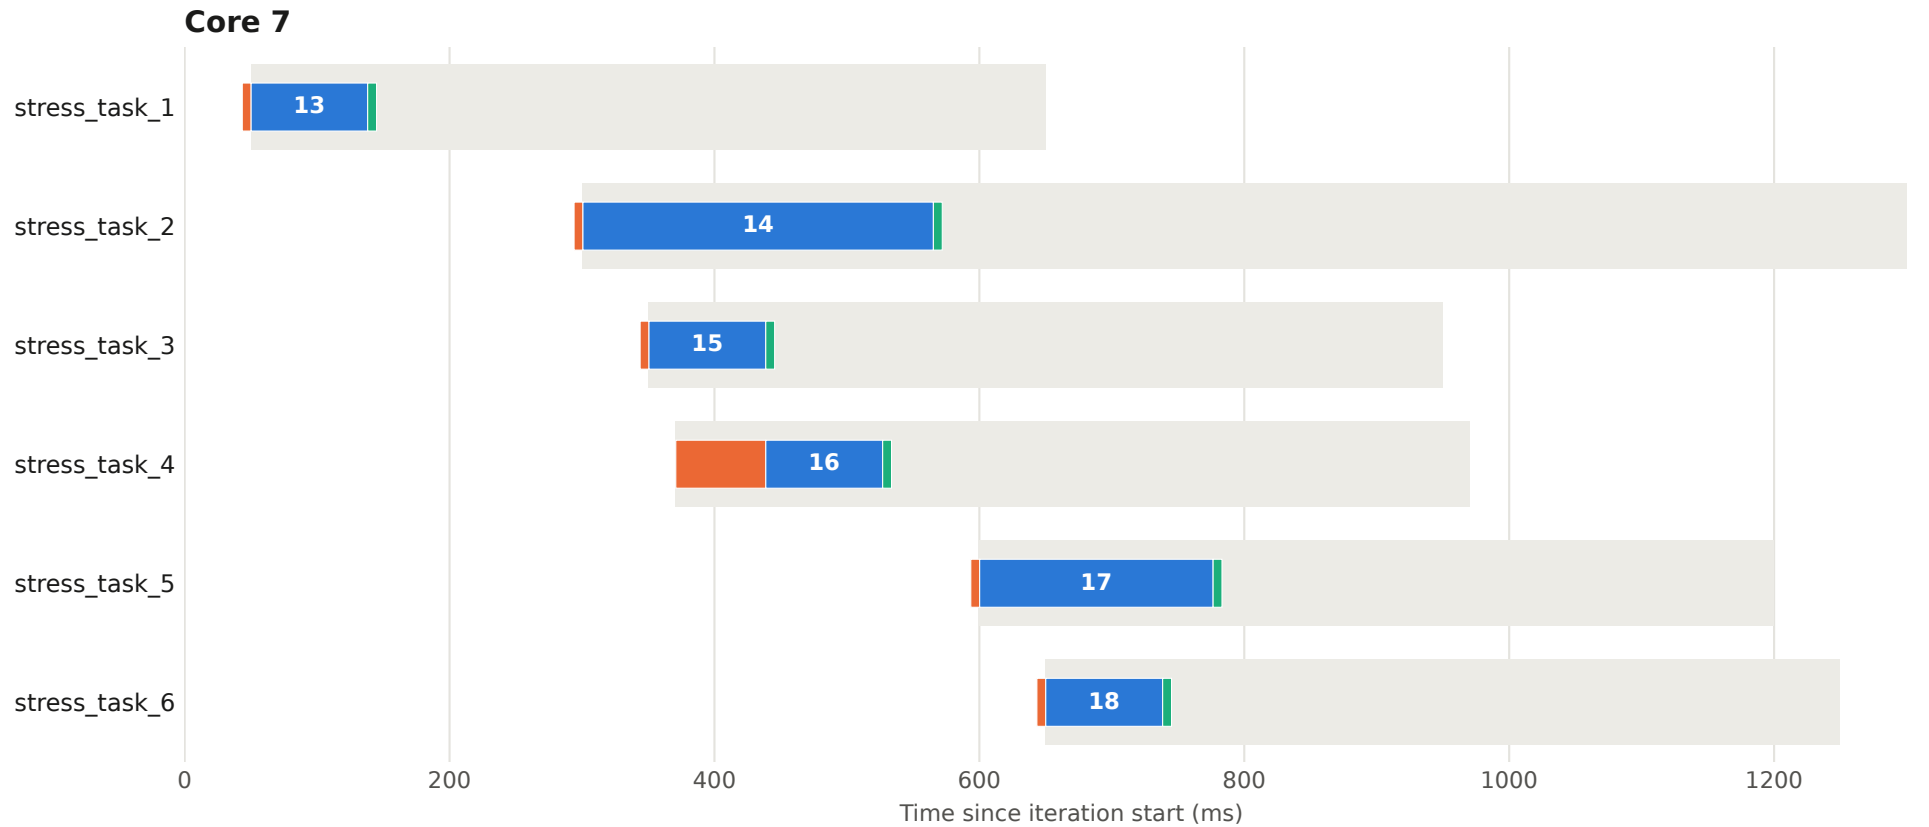


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 47 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

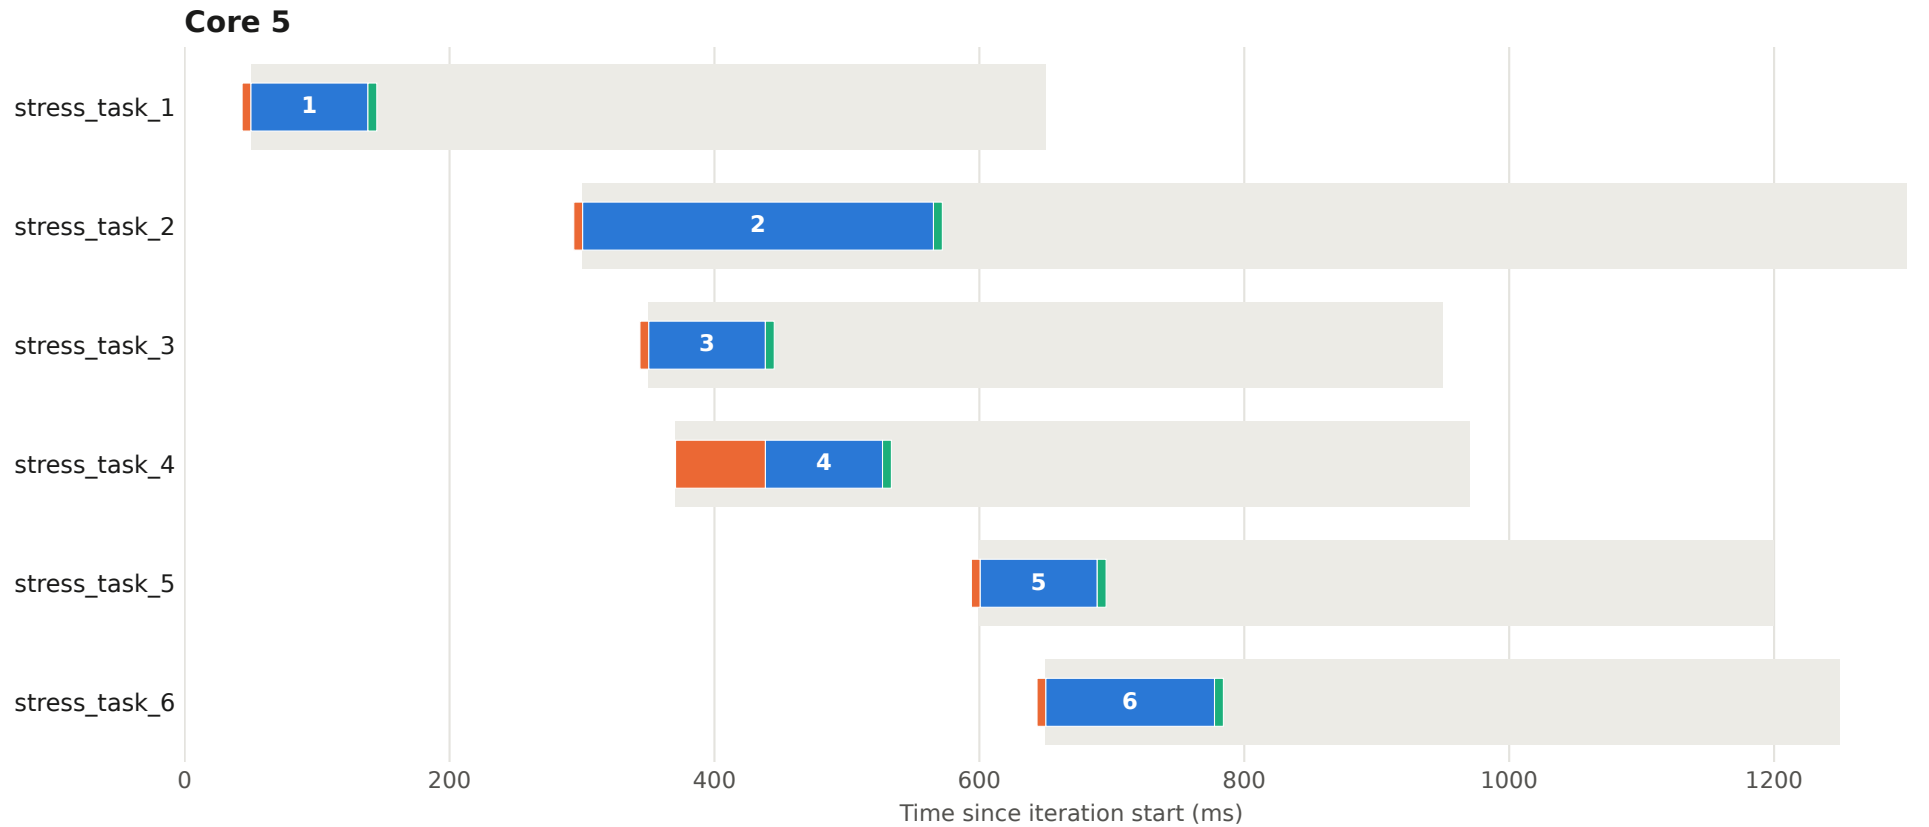


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 47 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

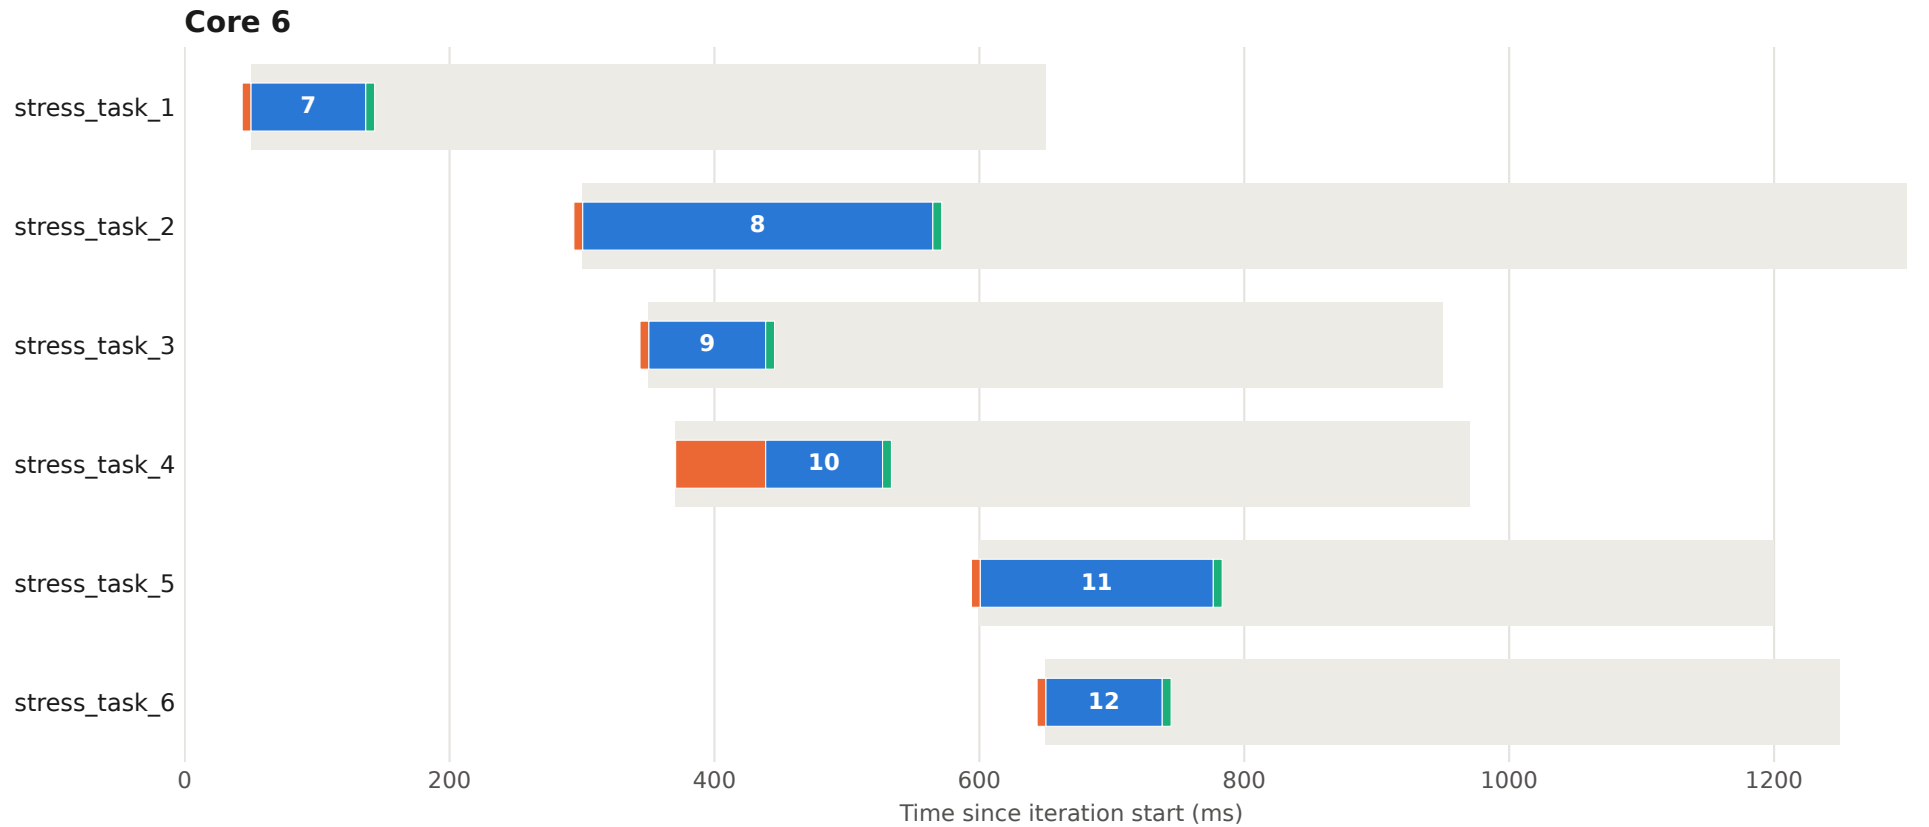


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 47 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

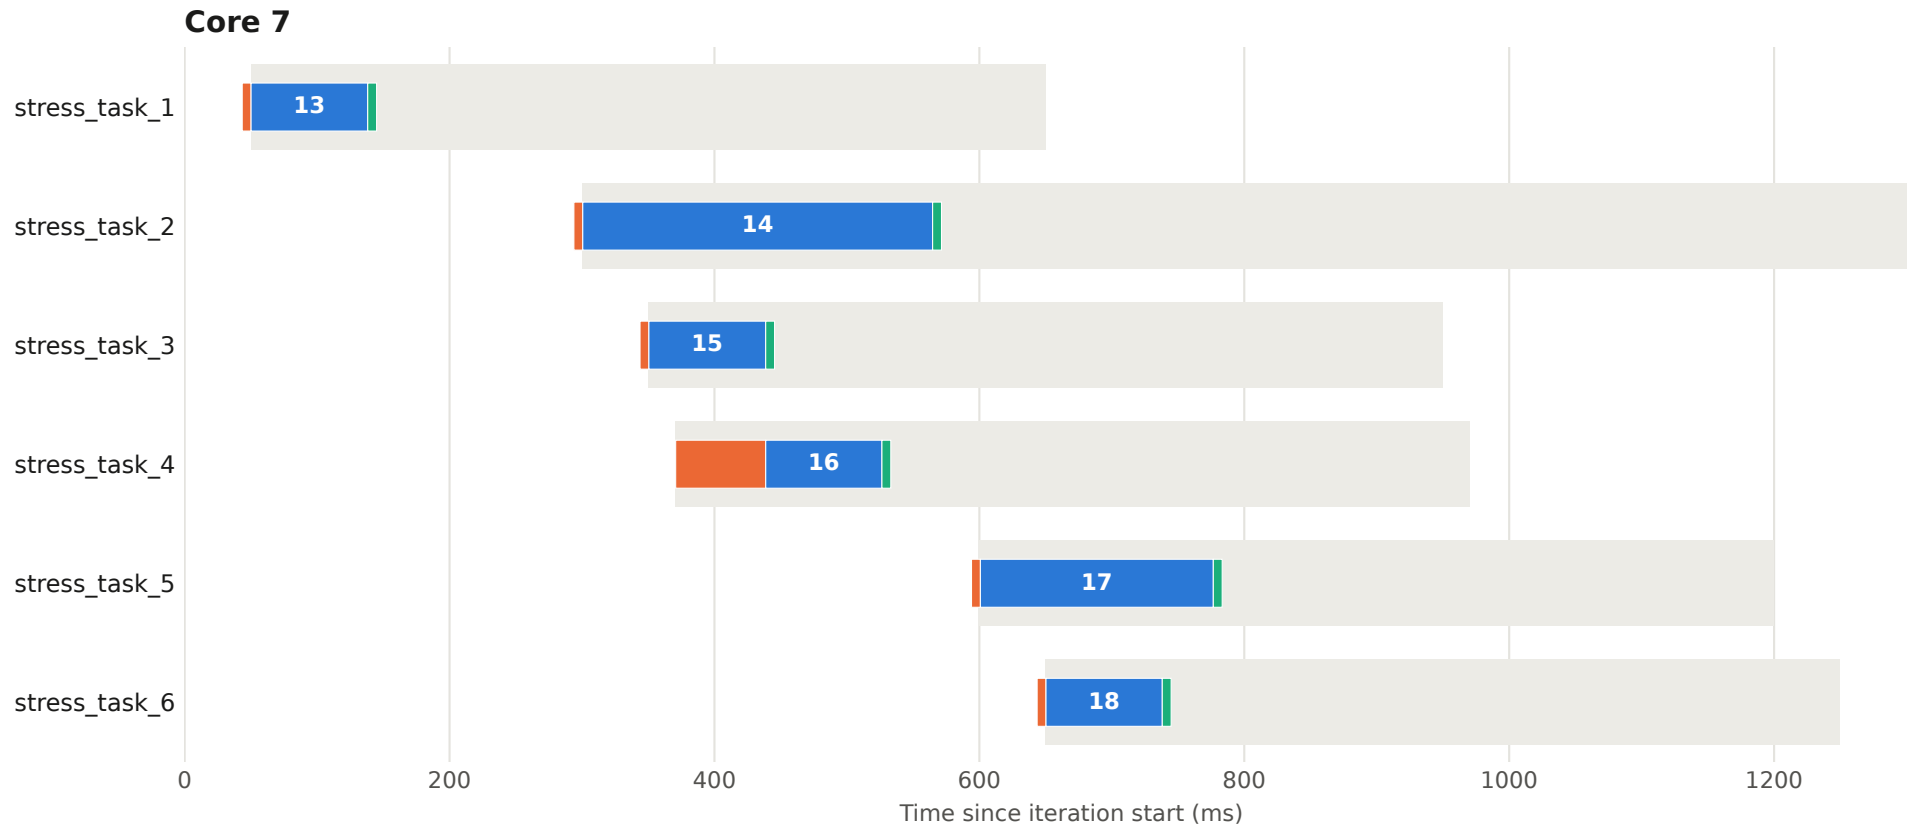


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 48 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

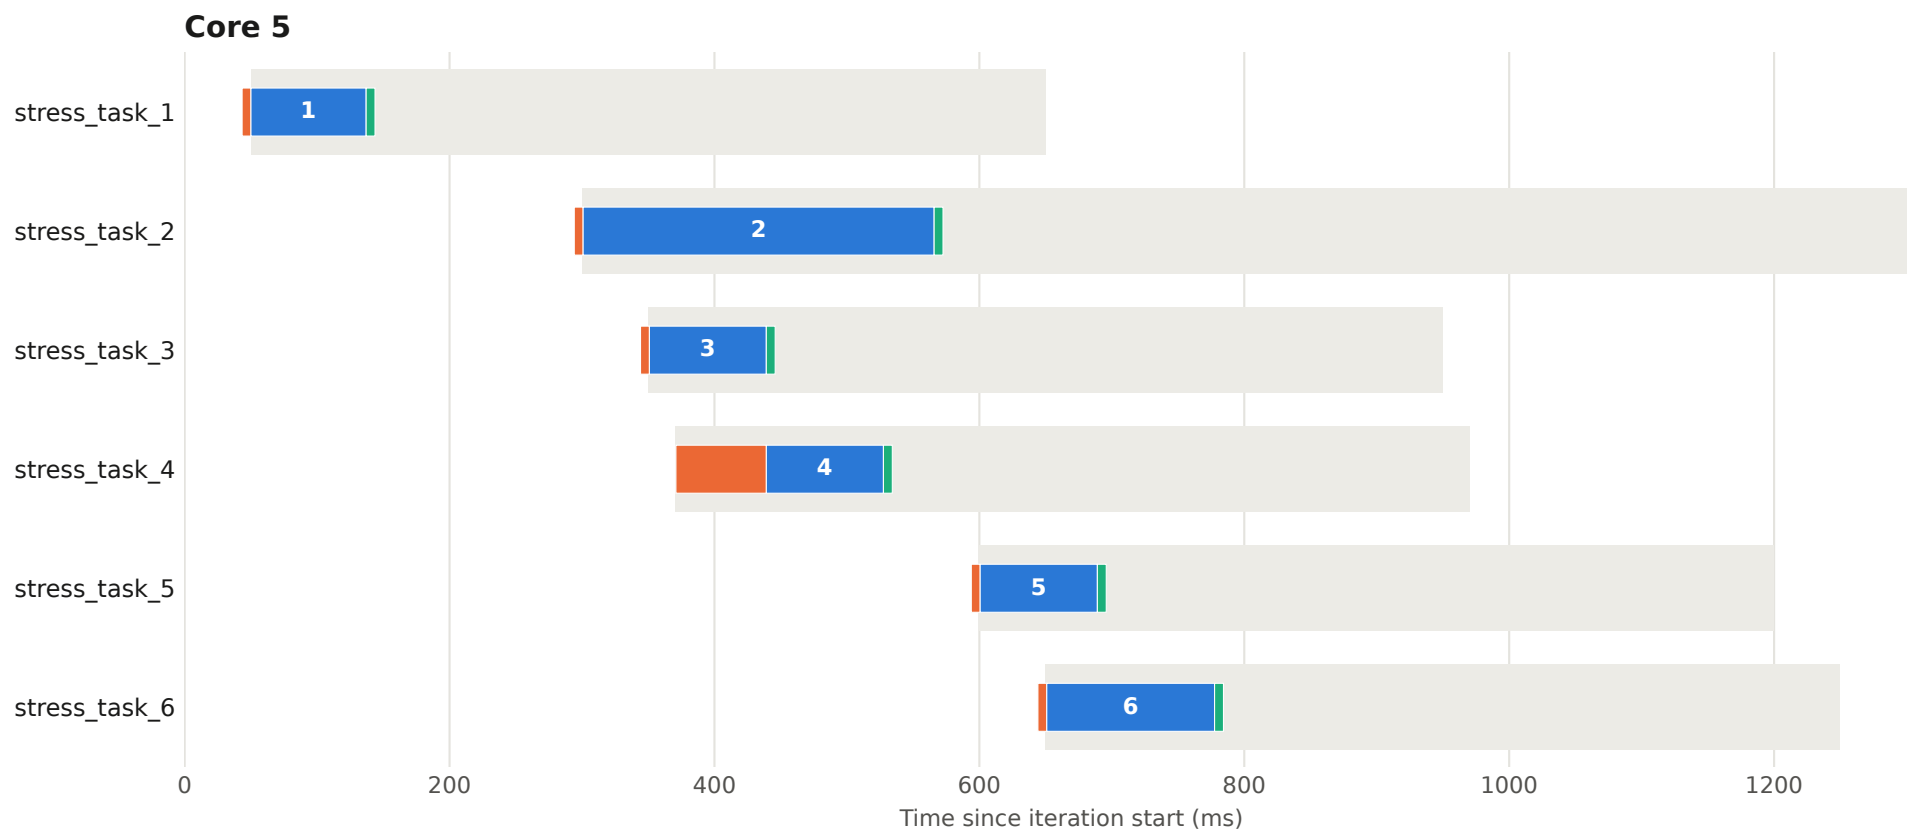


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 48 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

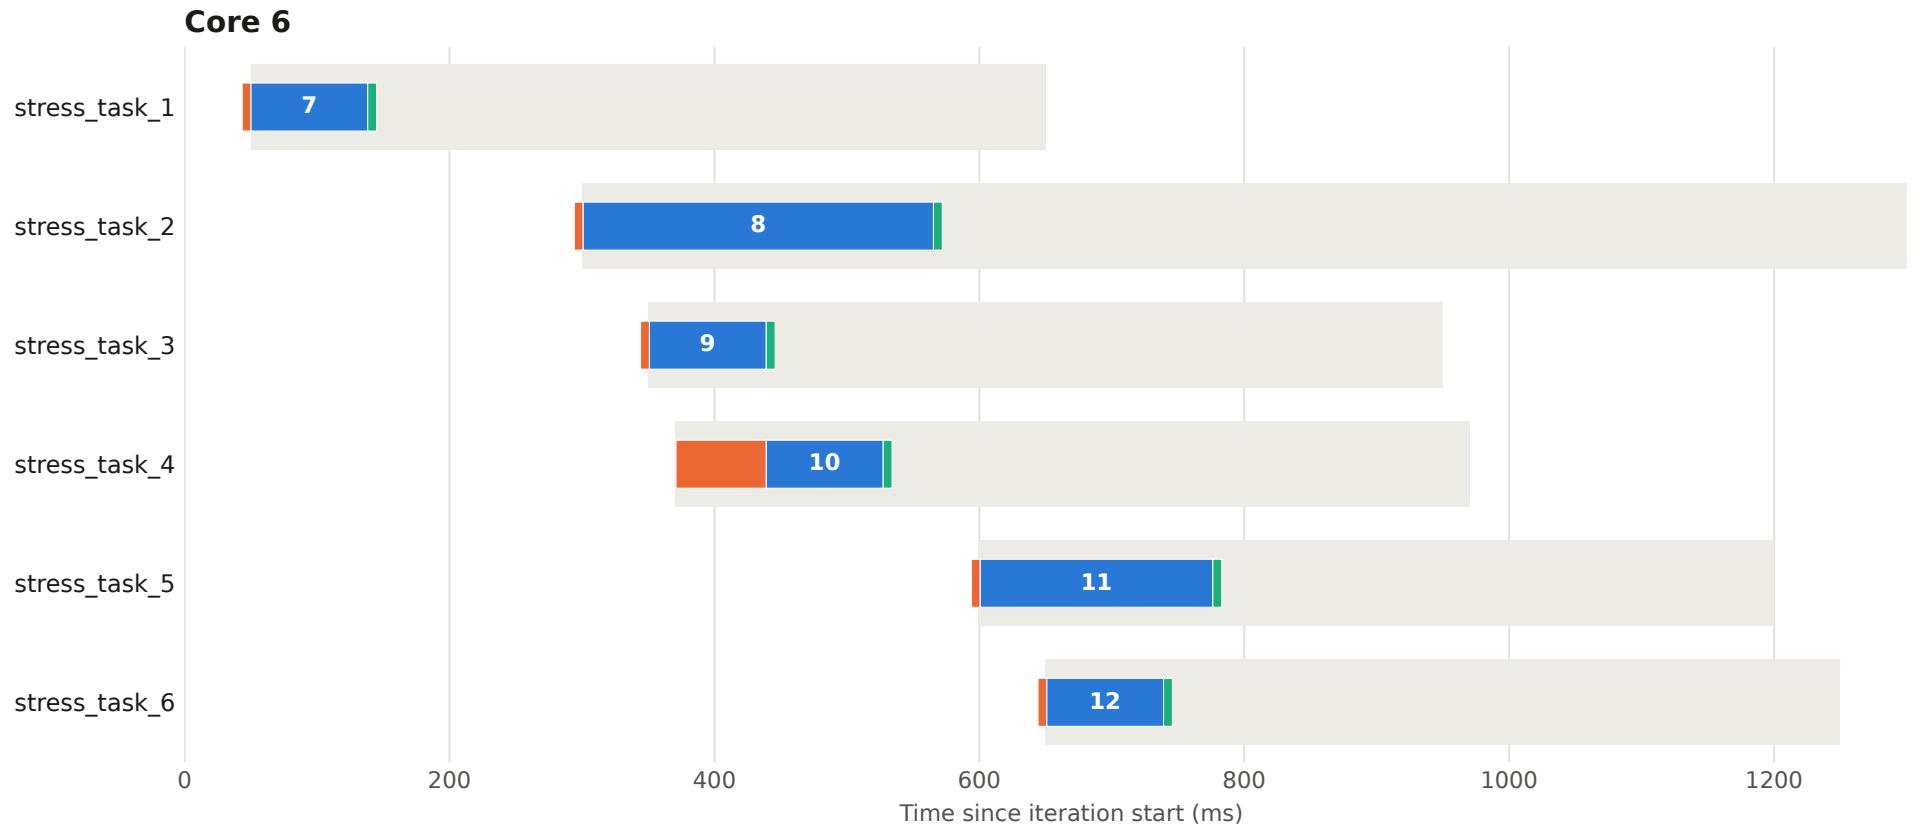


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 48 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

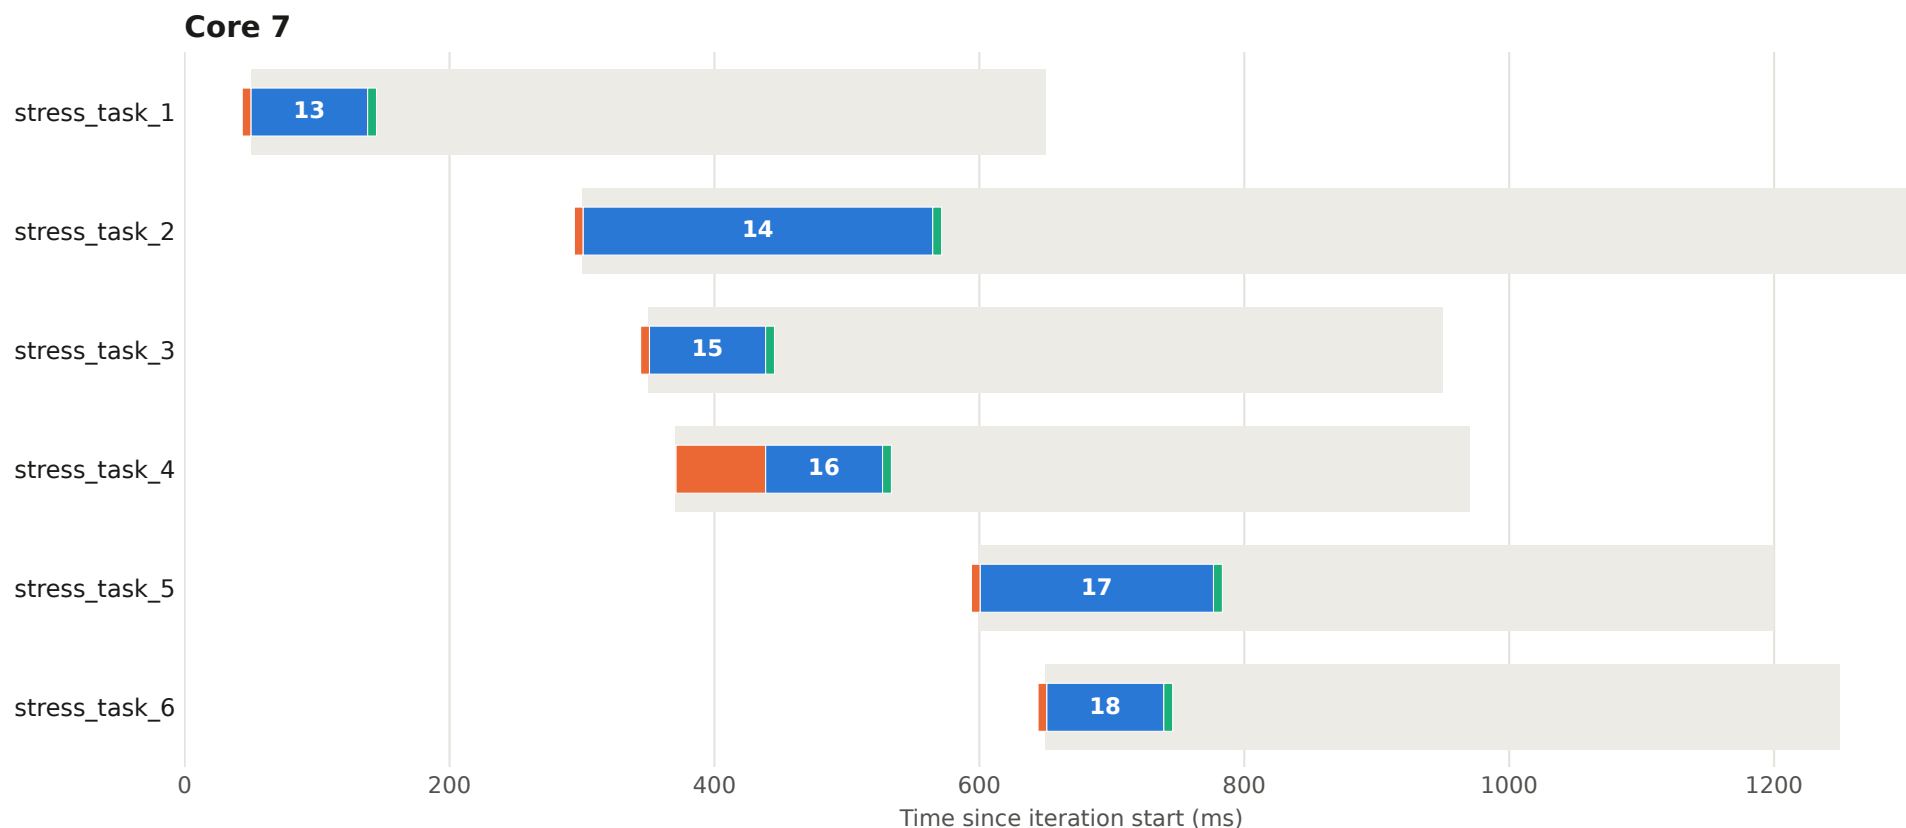


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 49 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

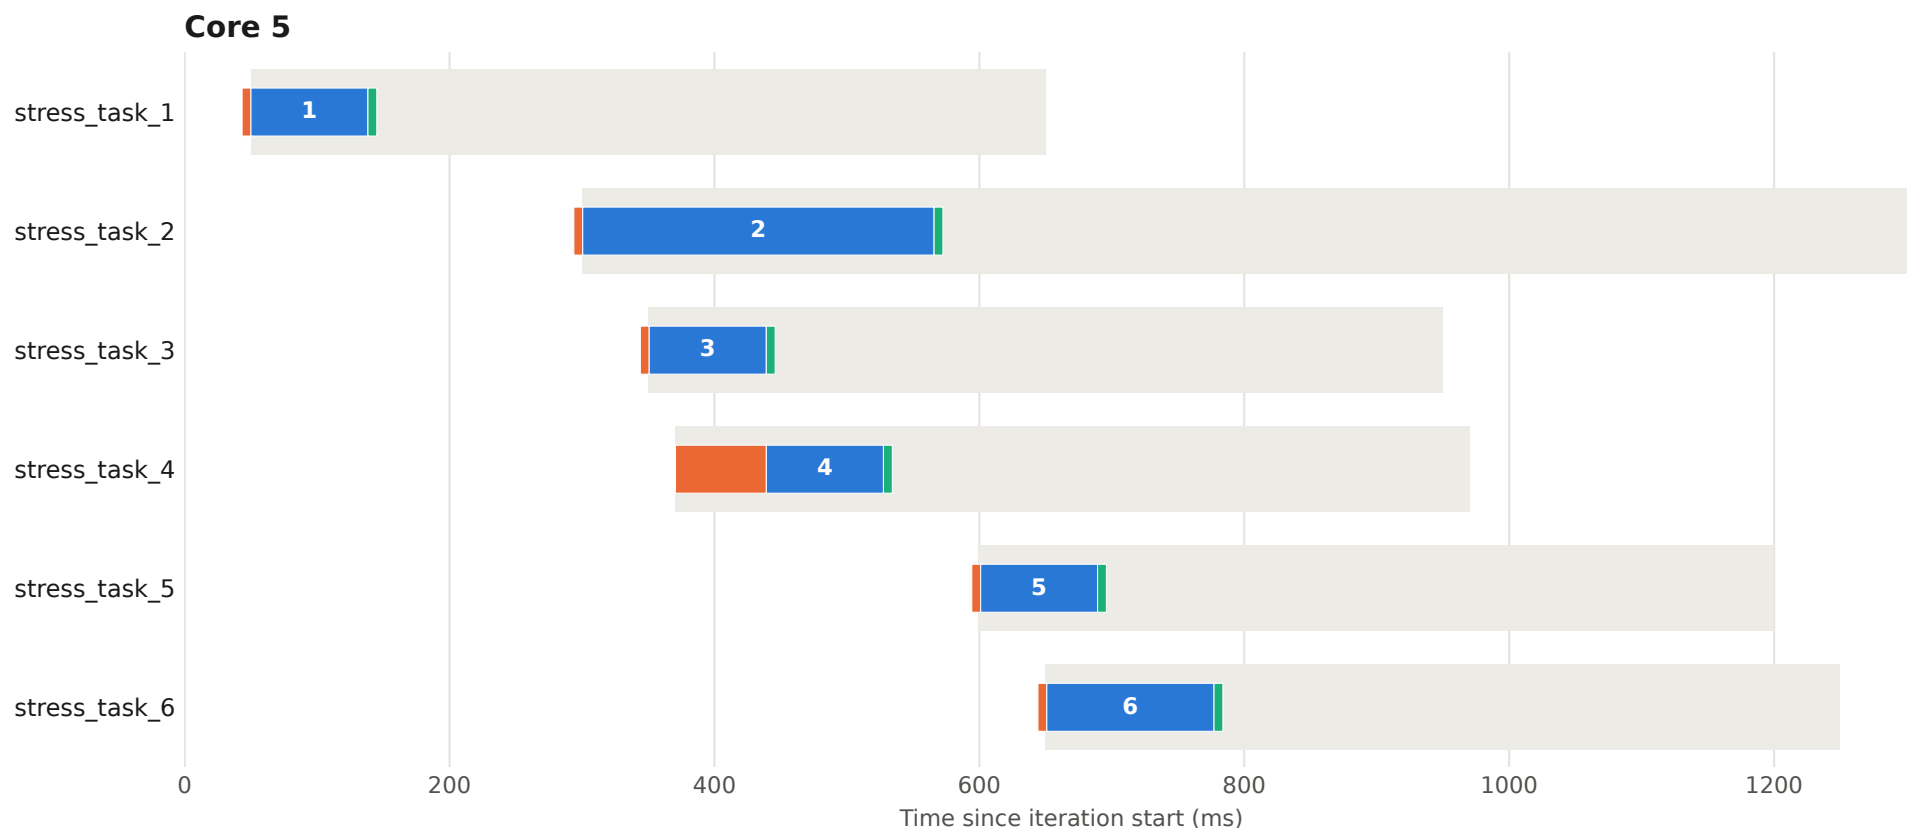


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 49 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

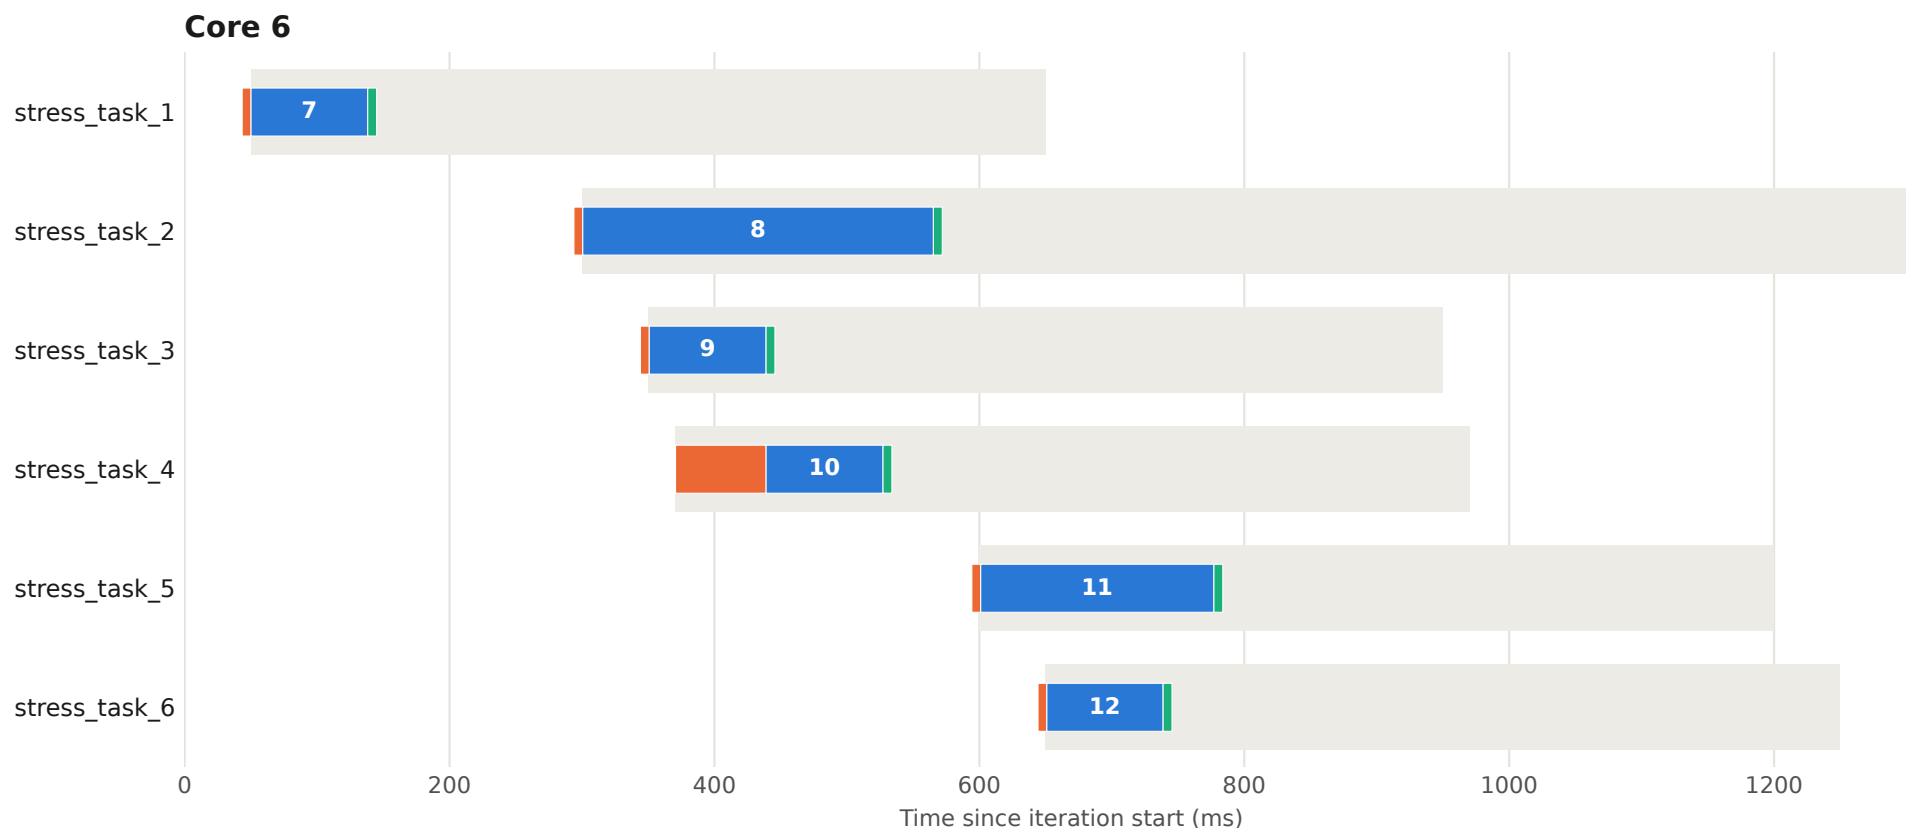


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 49 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

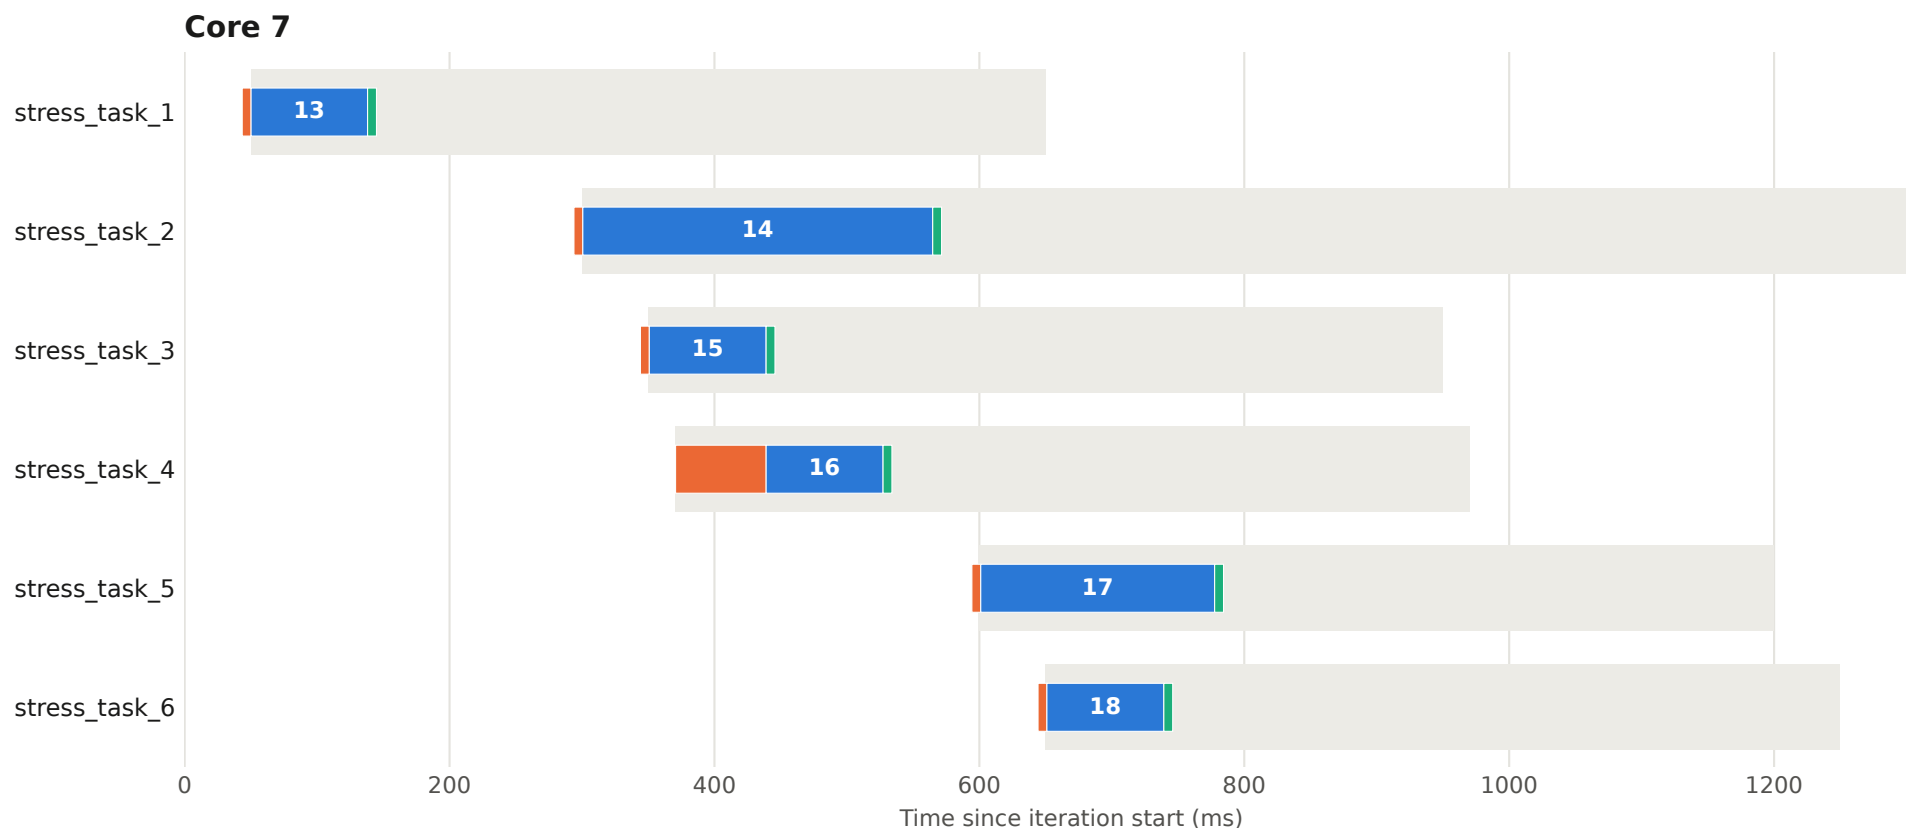


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 50 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

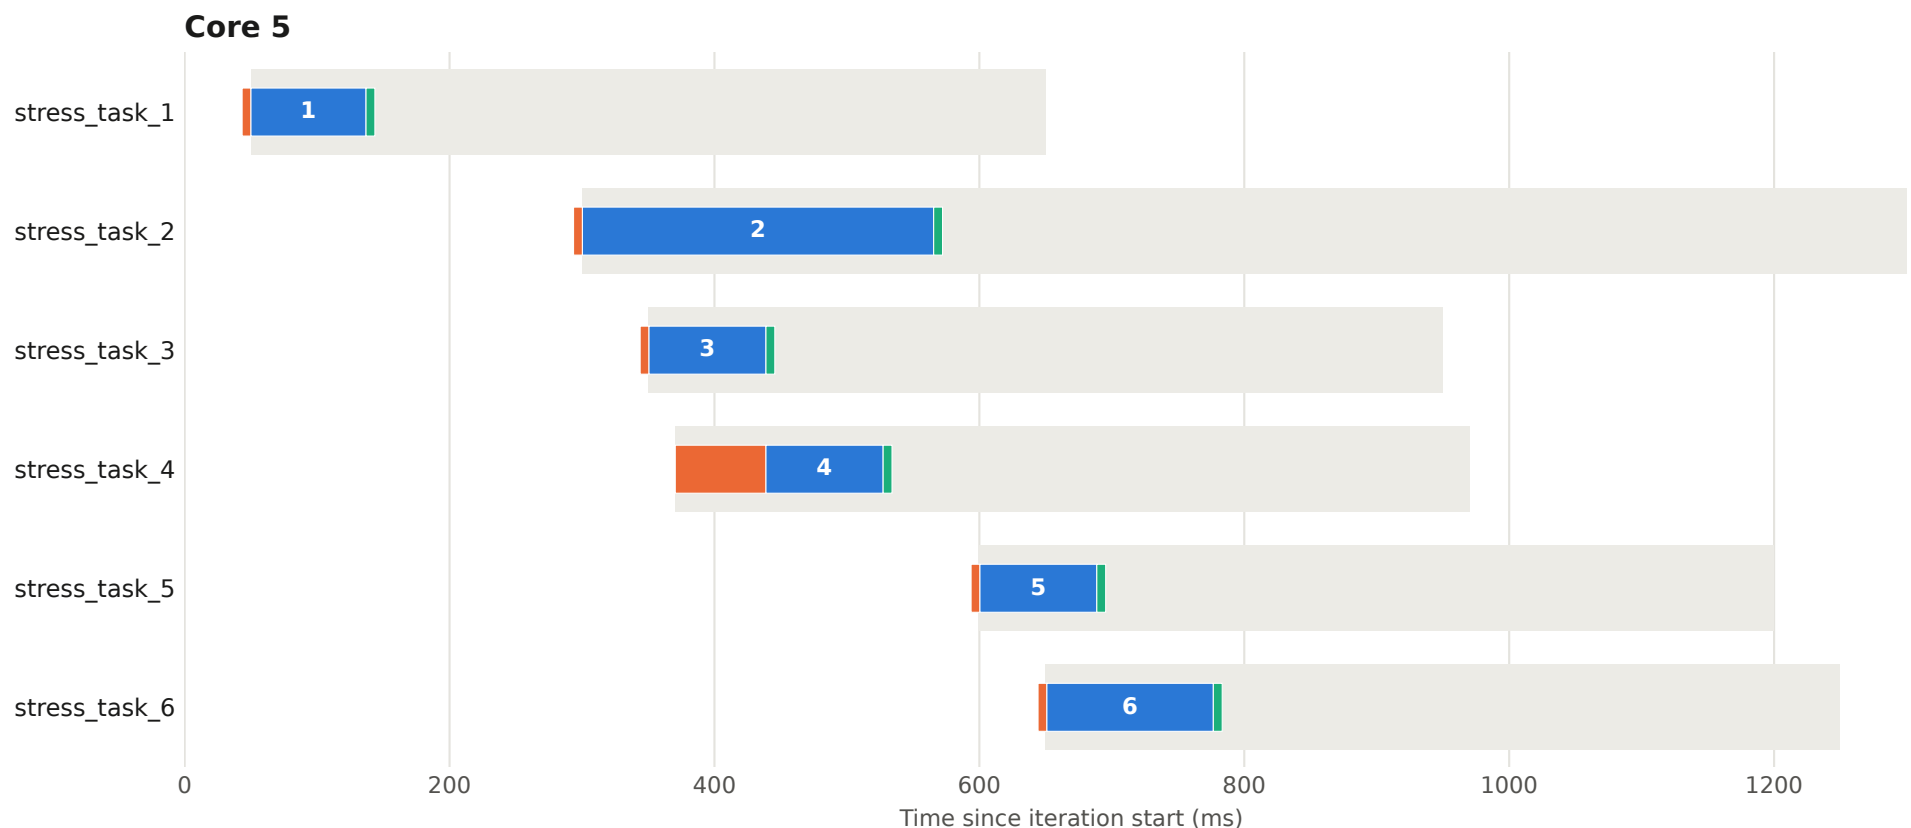


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 50 - core 6

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

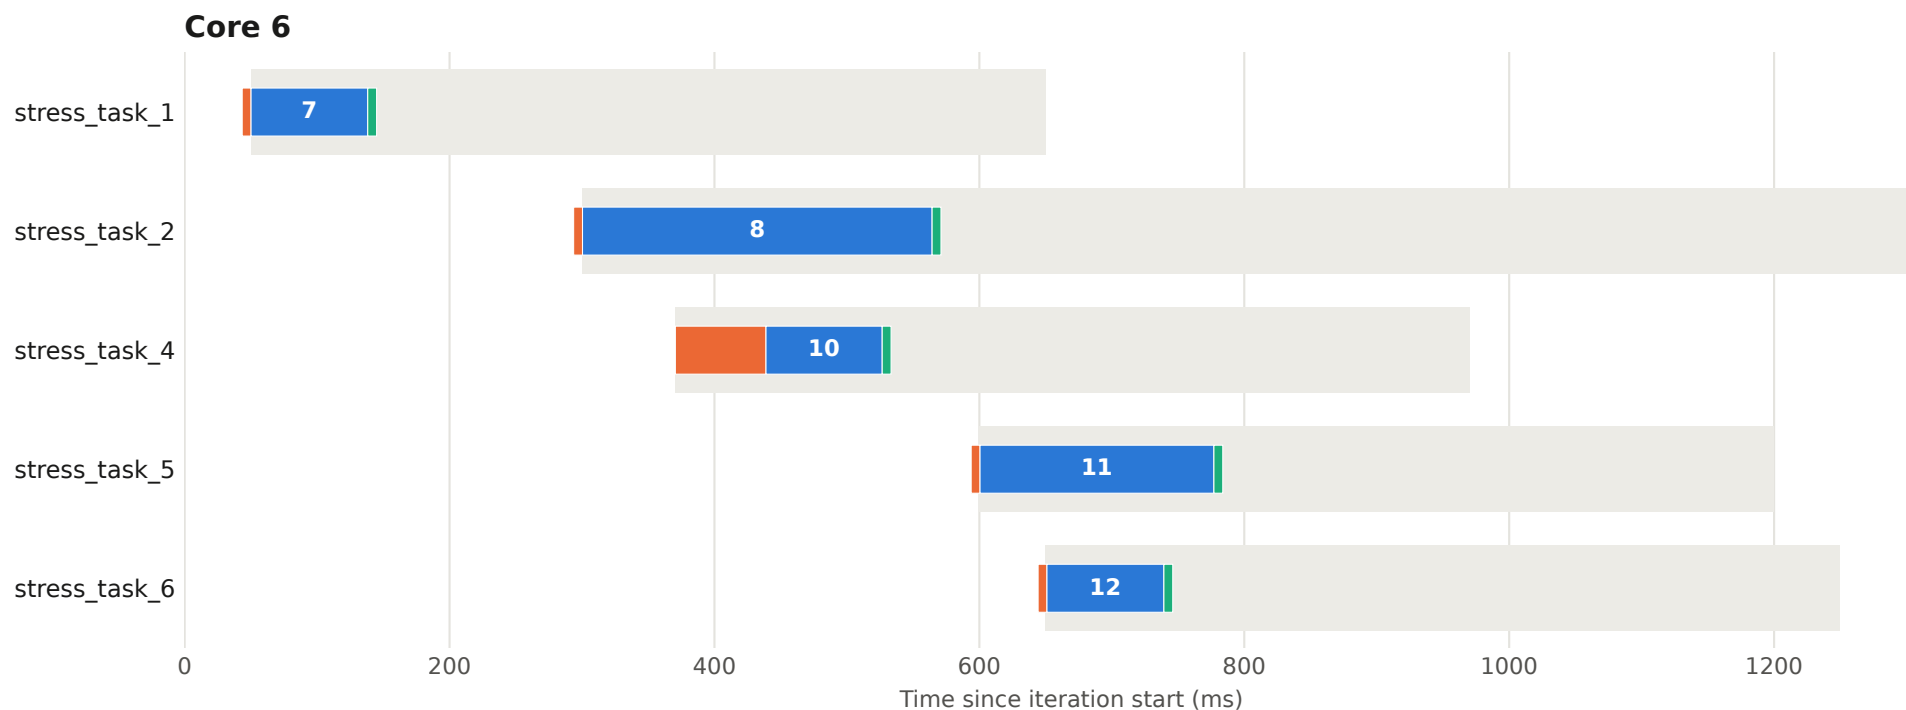

Execution plan - iteration 50 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

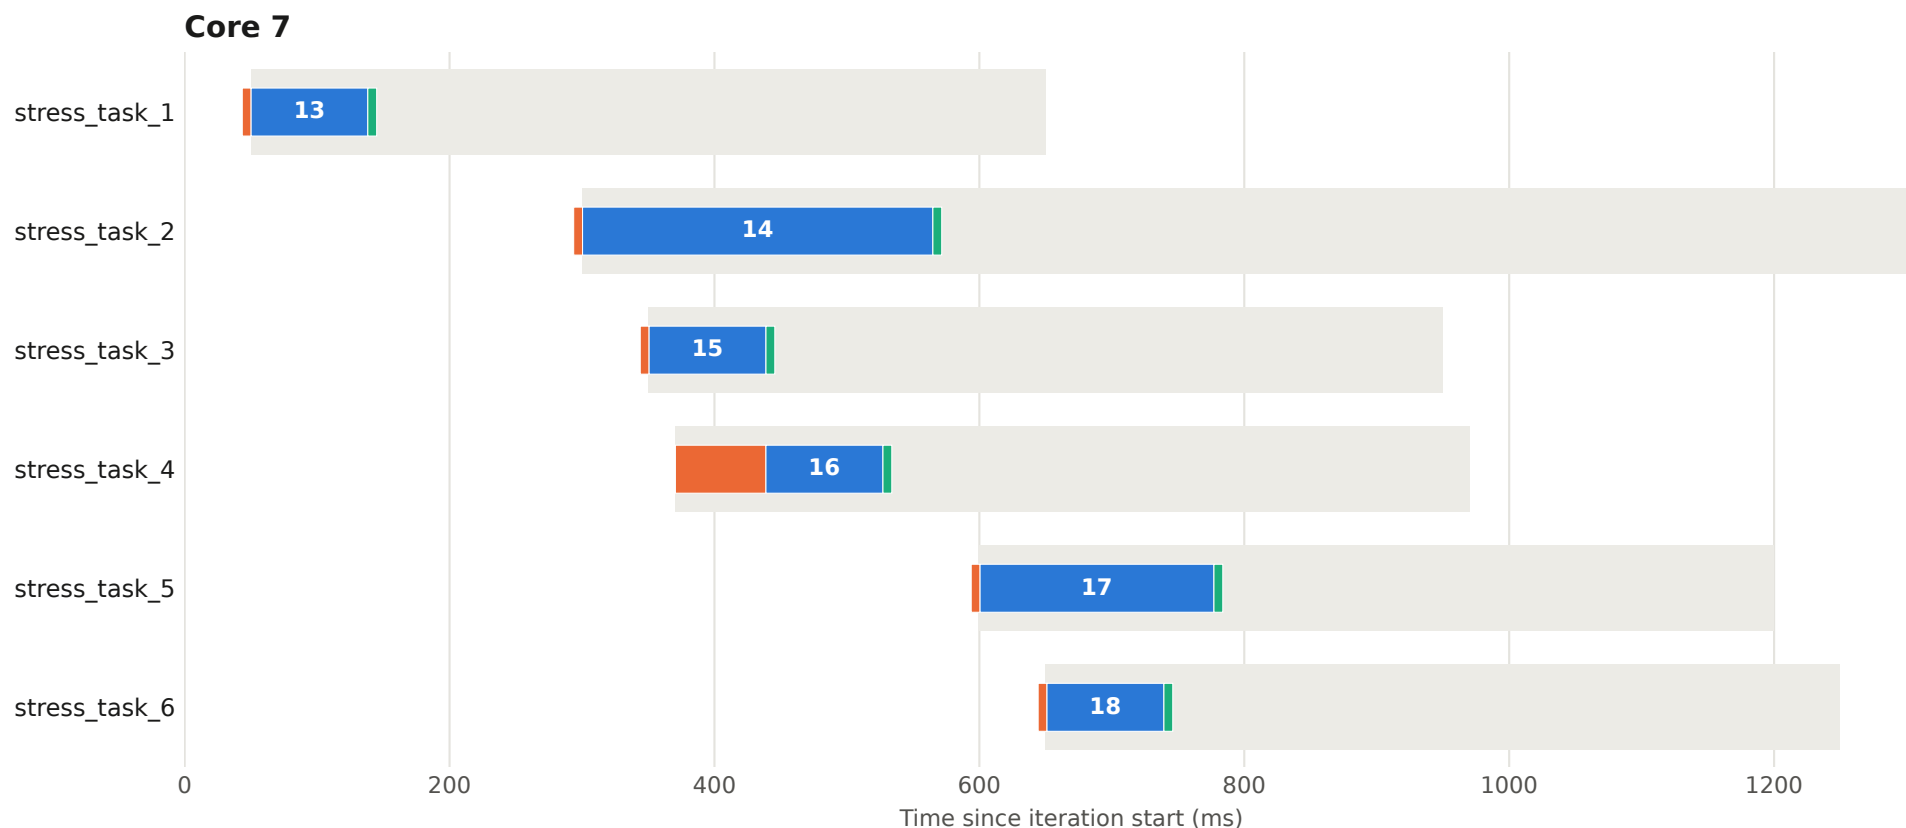


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 50 - core 62026

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

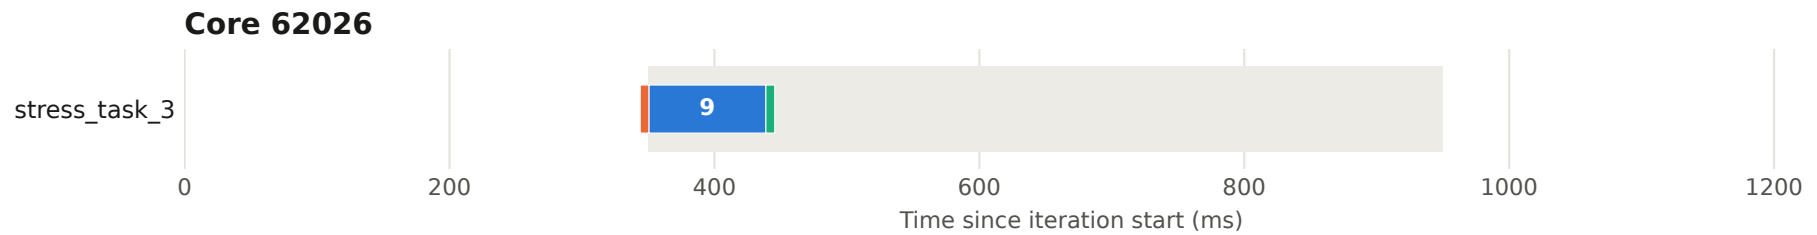

Execution plan - iteration 51 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

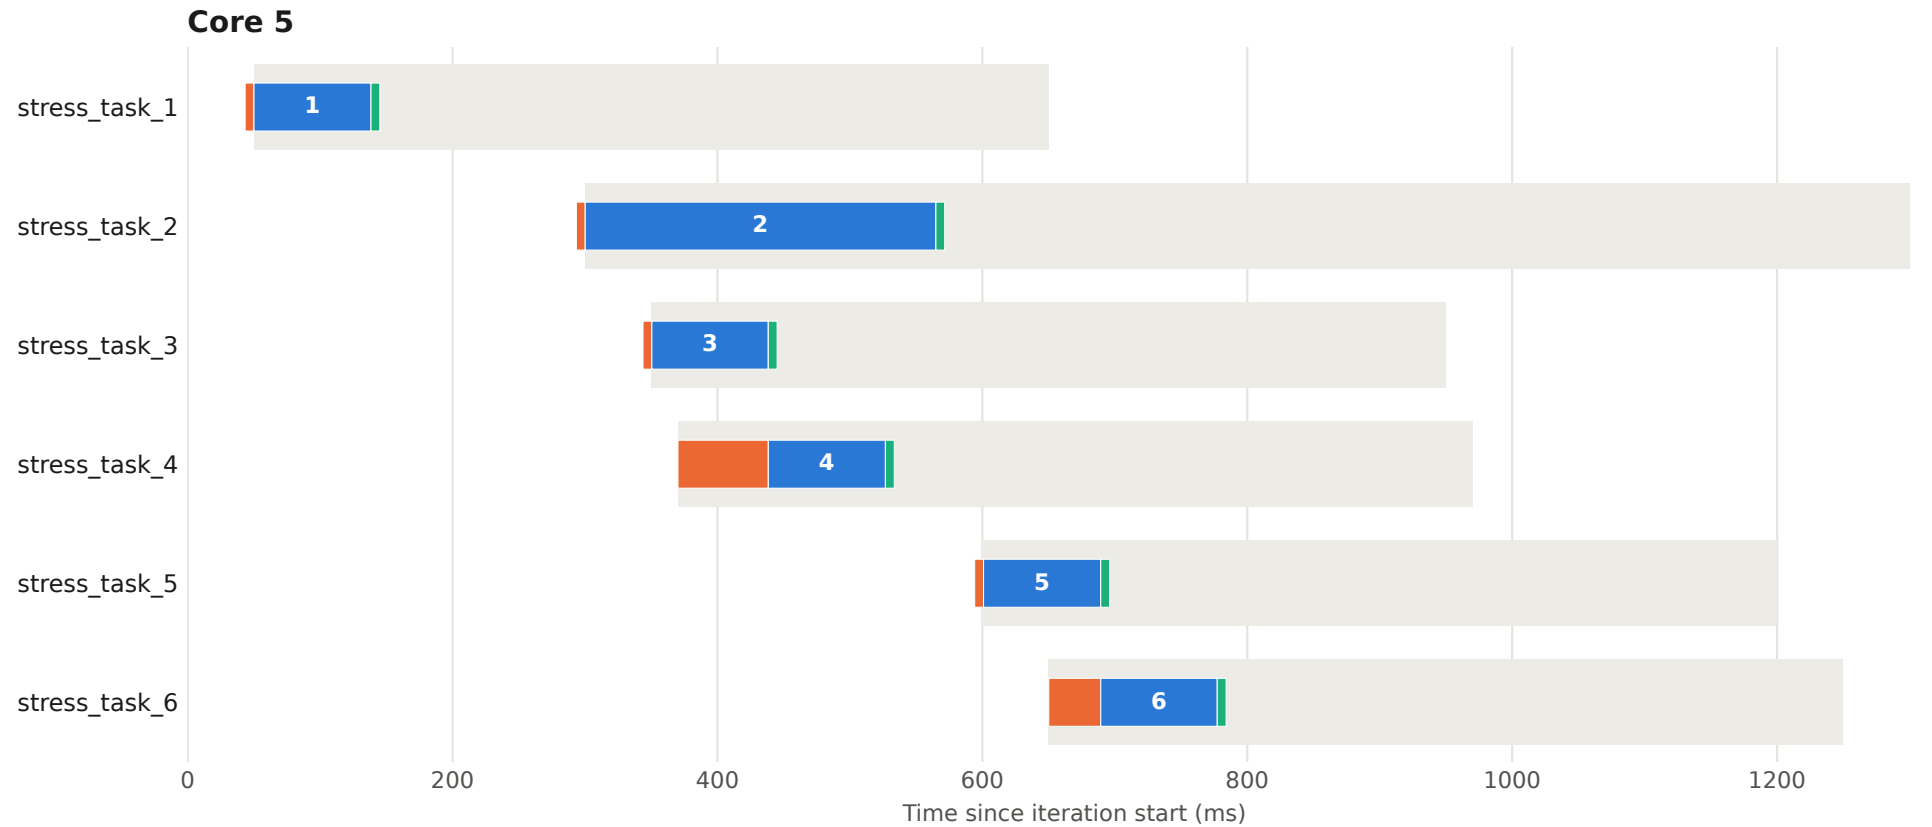


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 51 - core 6

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

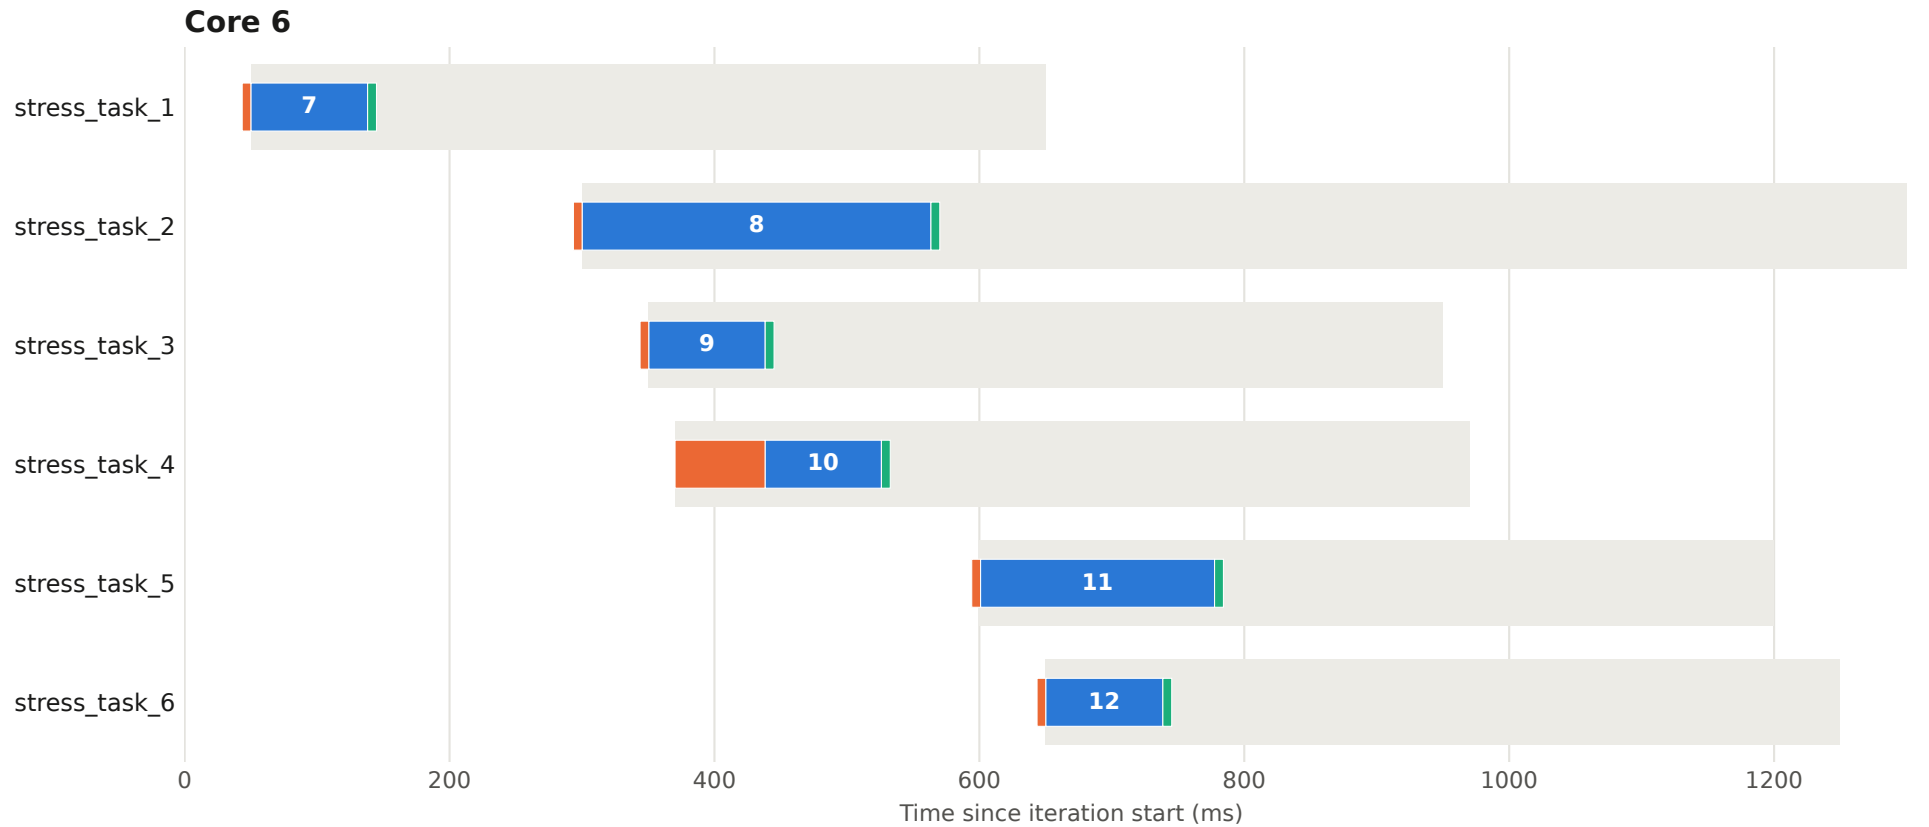

Execution plan - iteration 51 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

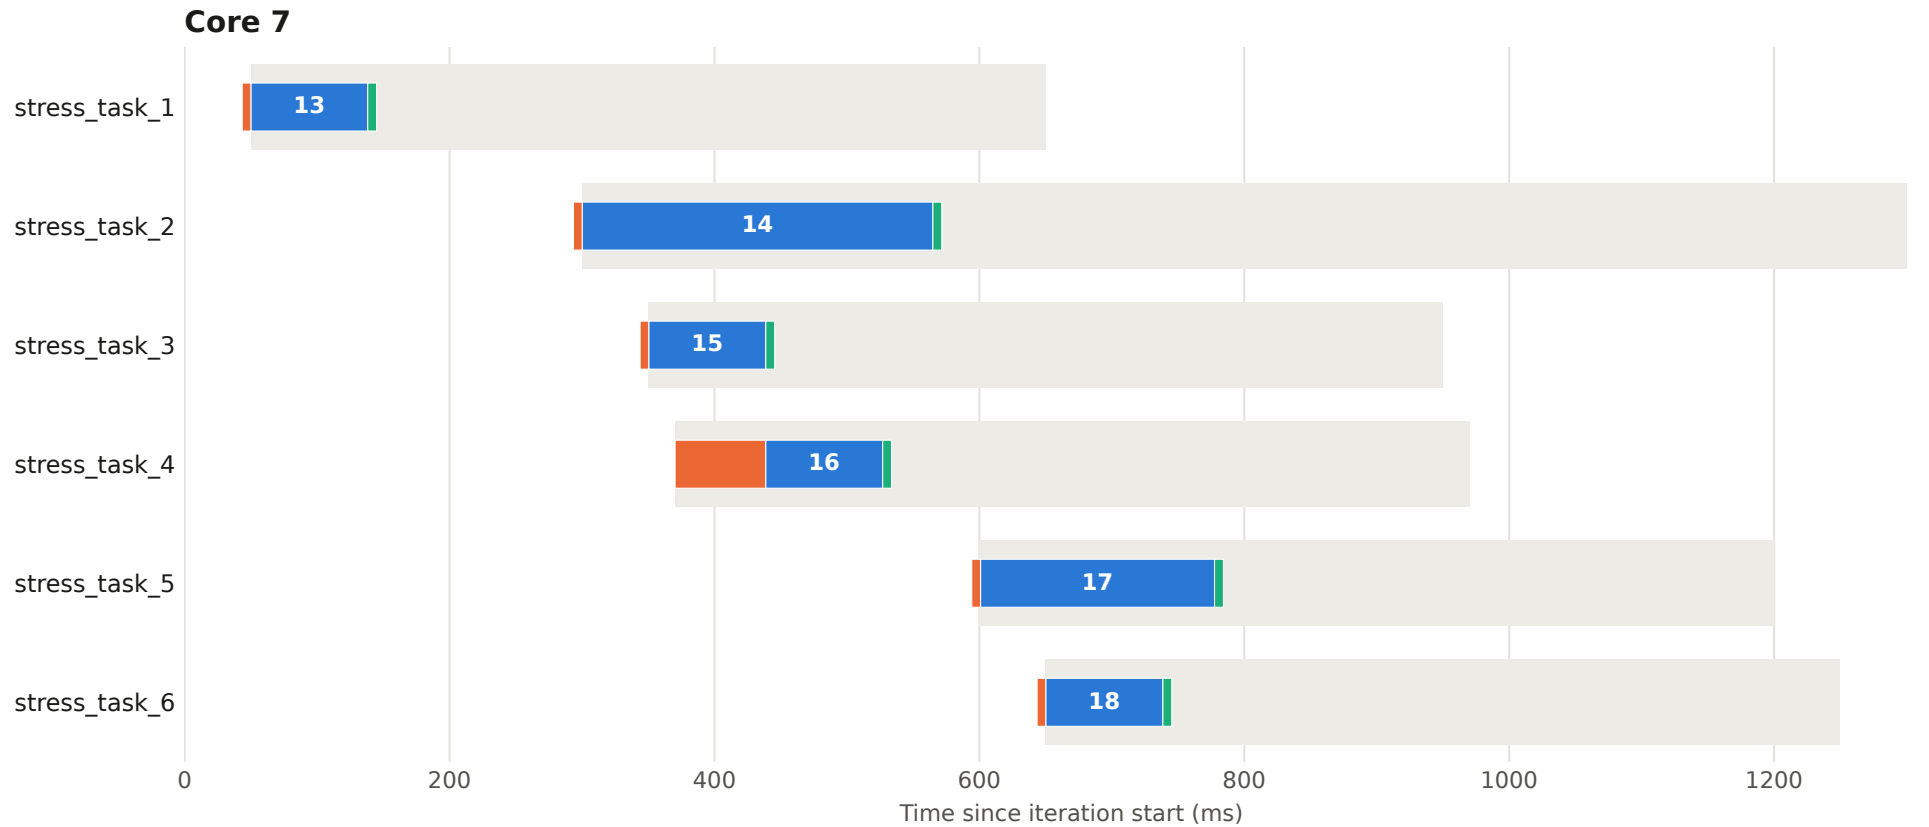


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 52 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

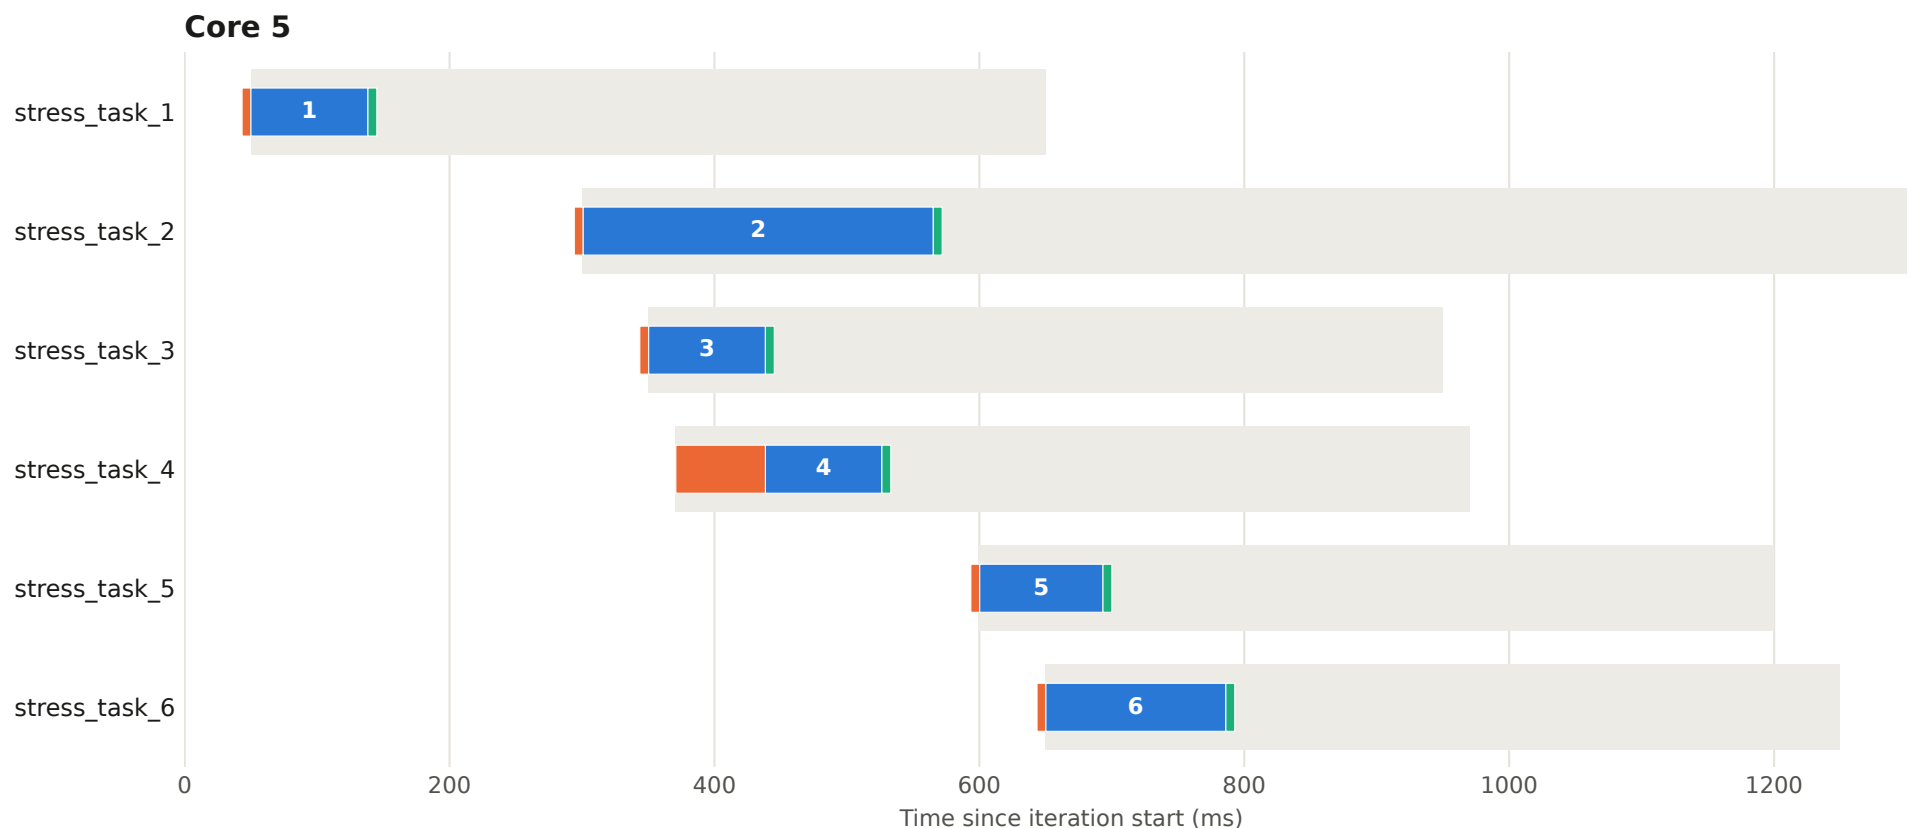


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 52 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

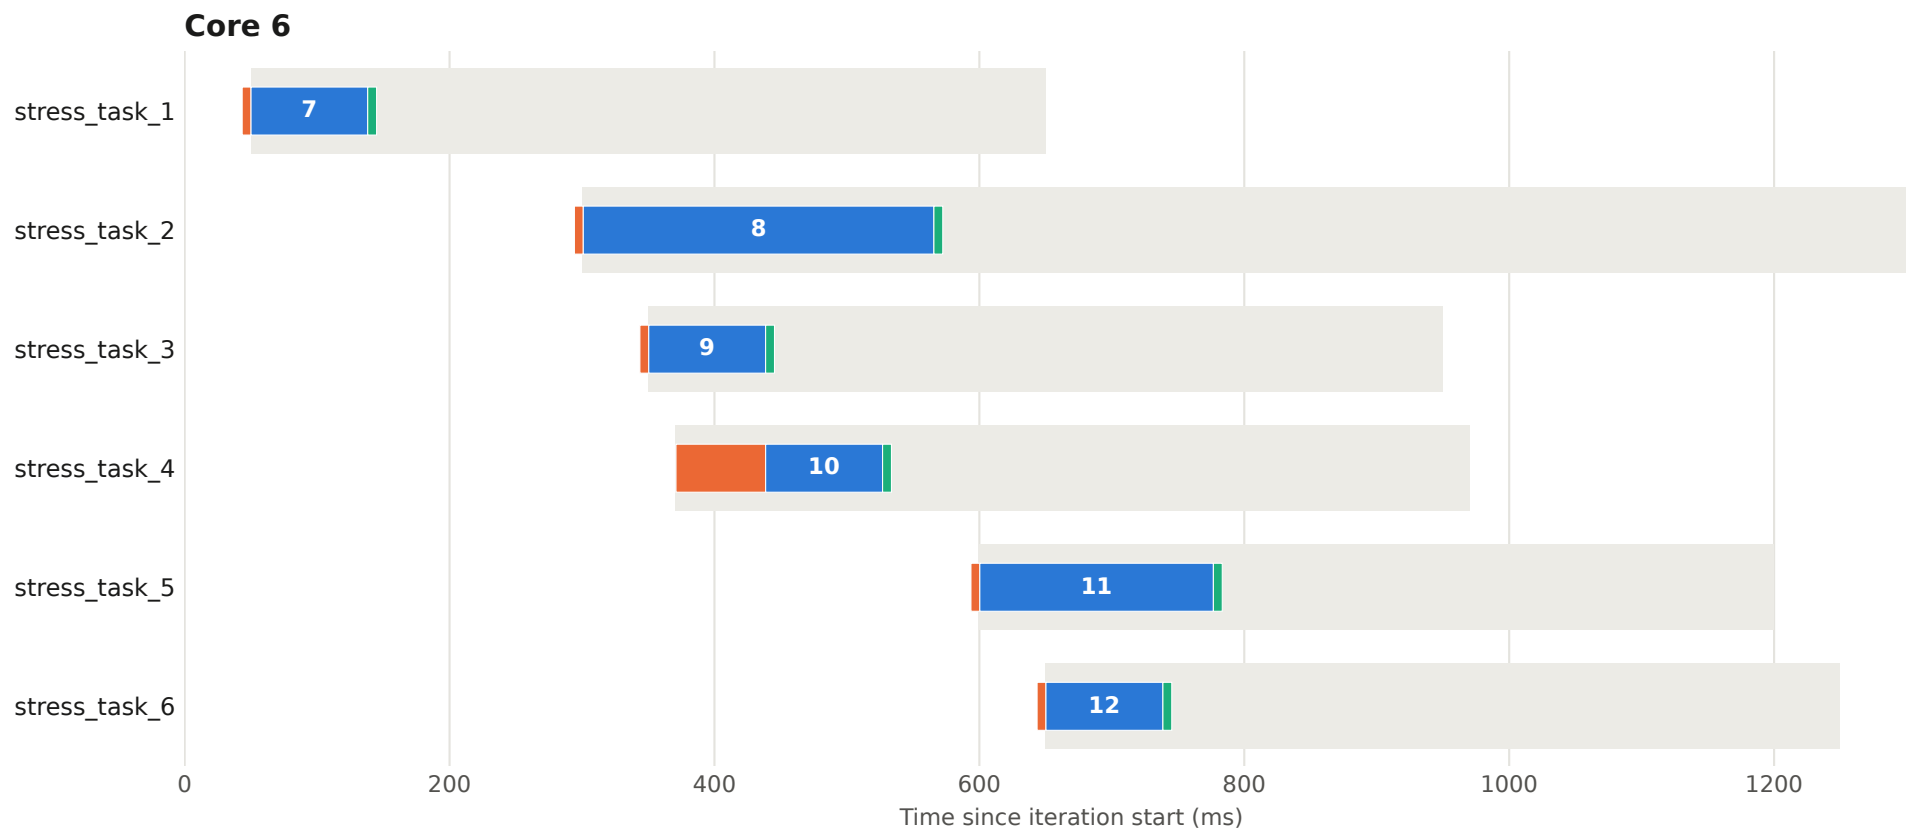


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 52 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

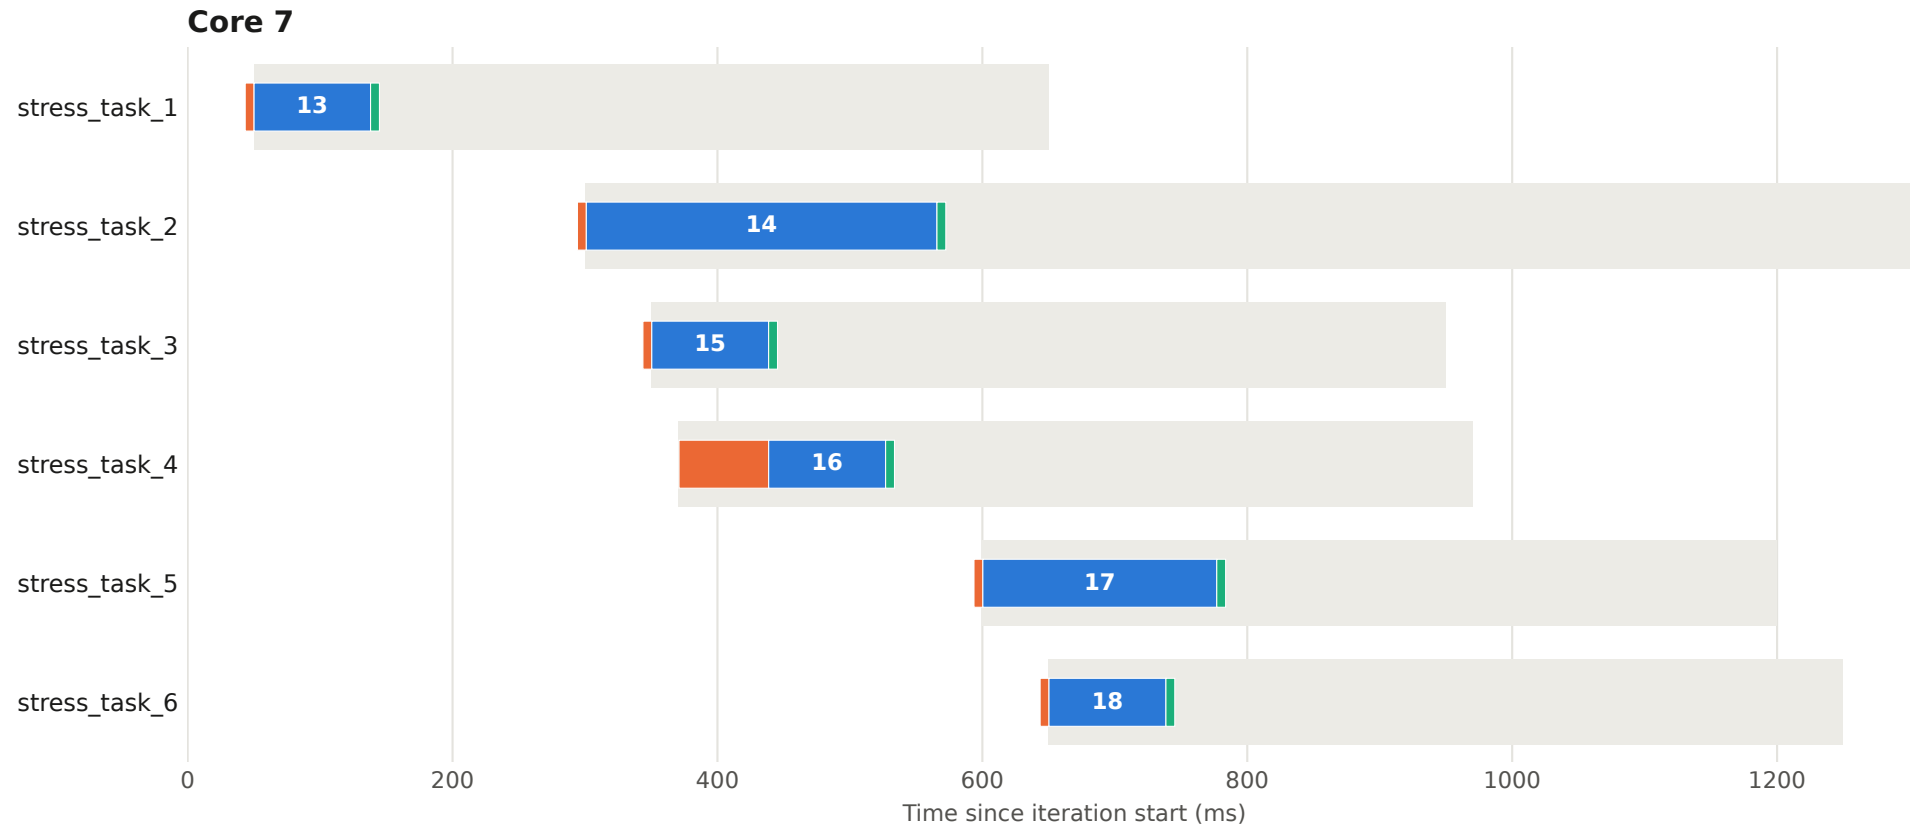


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 53 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

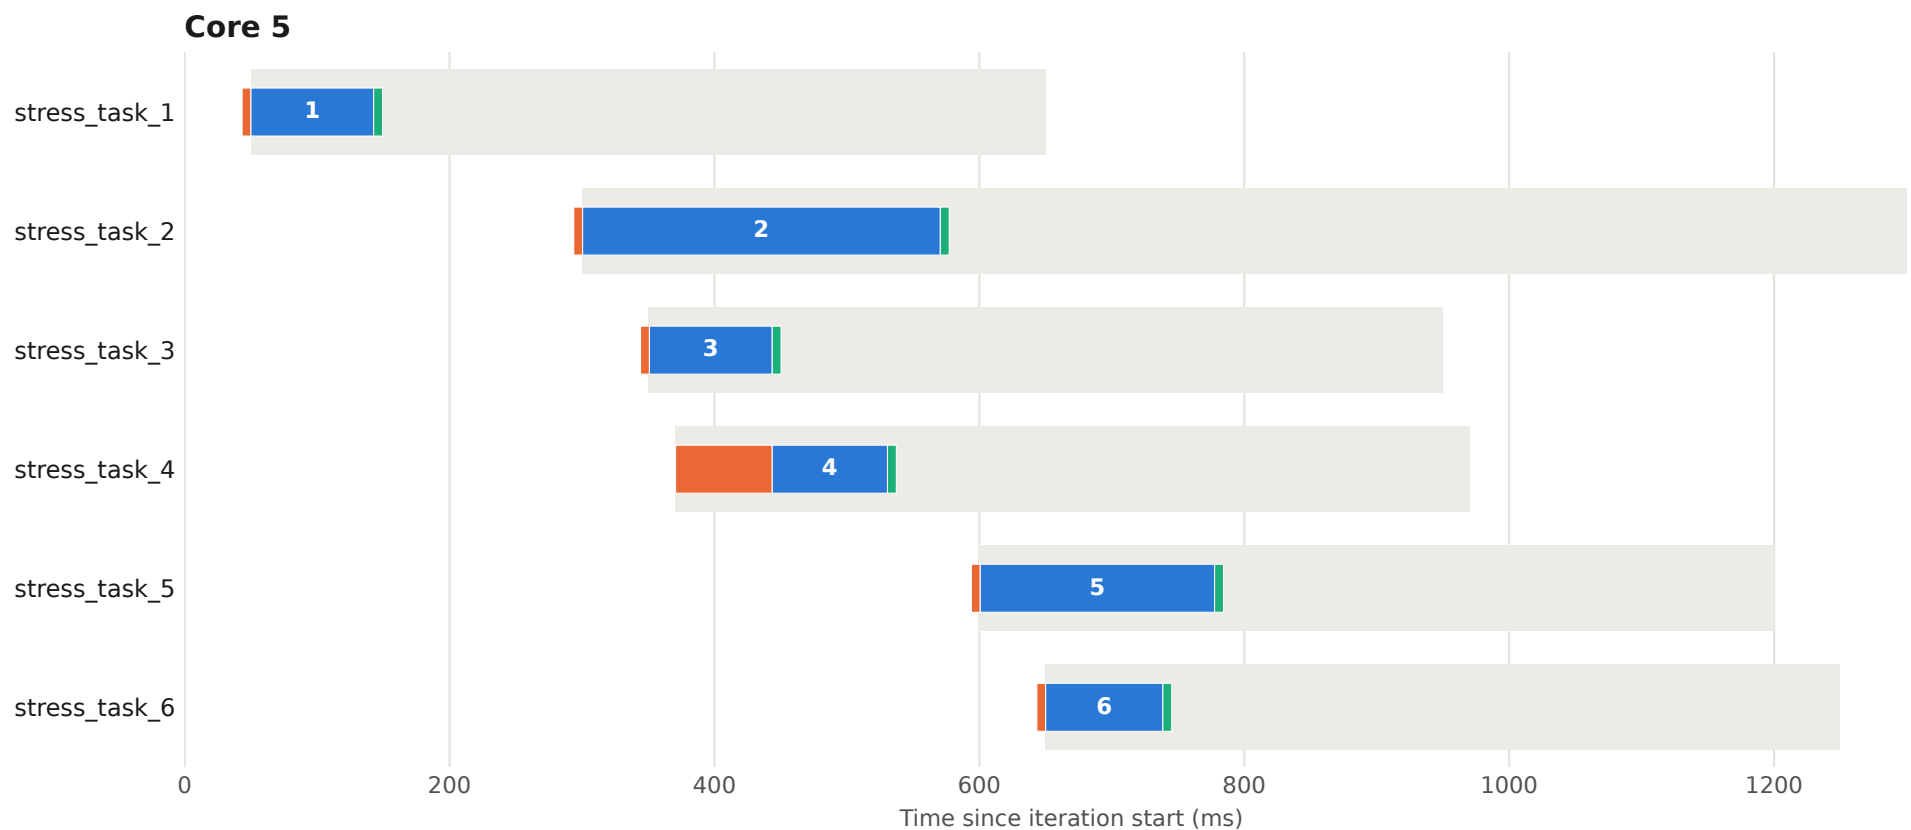


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 53 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

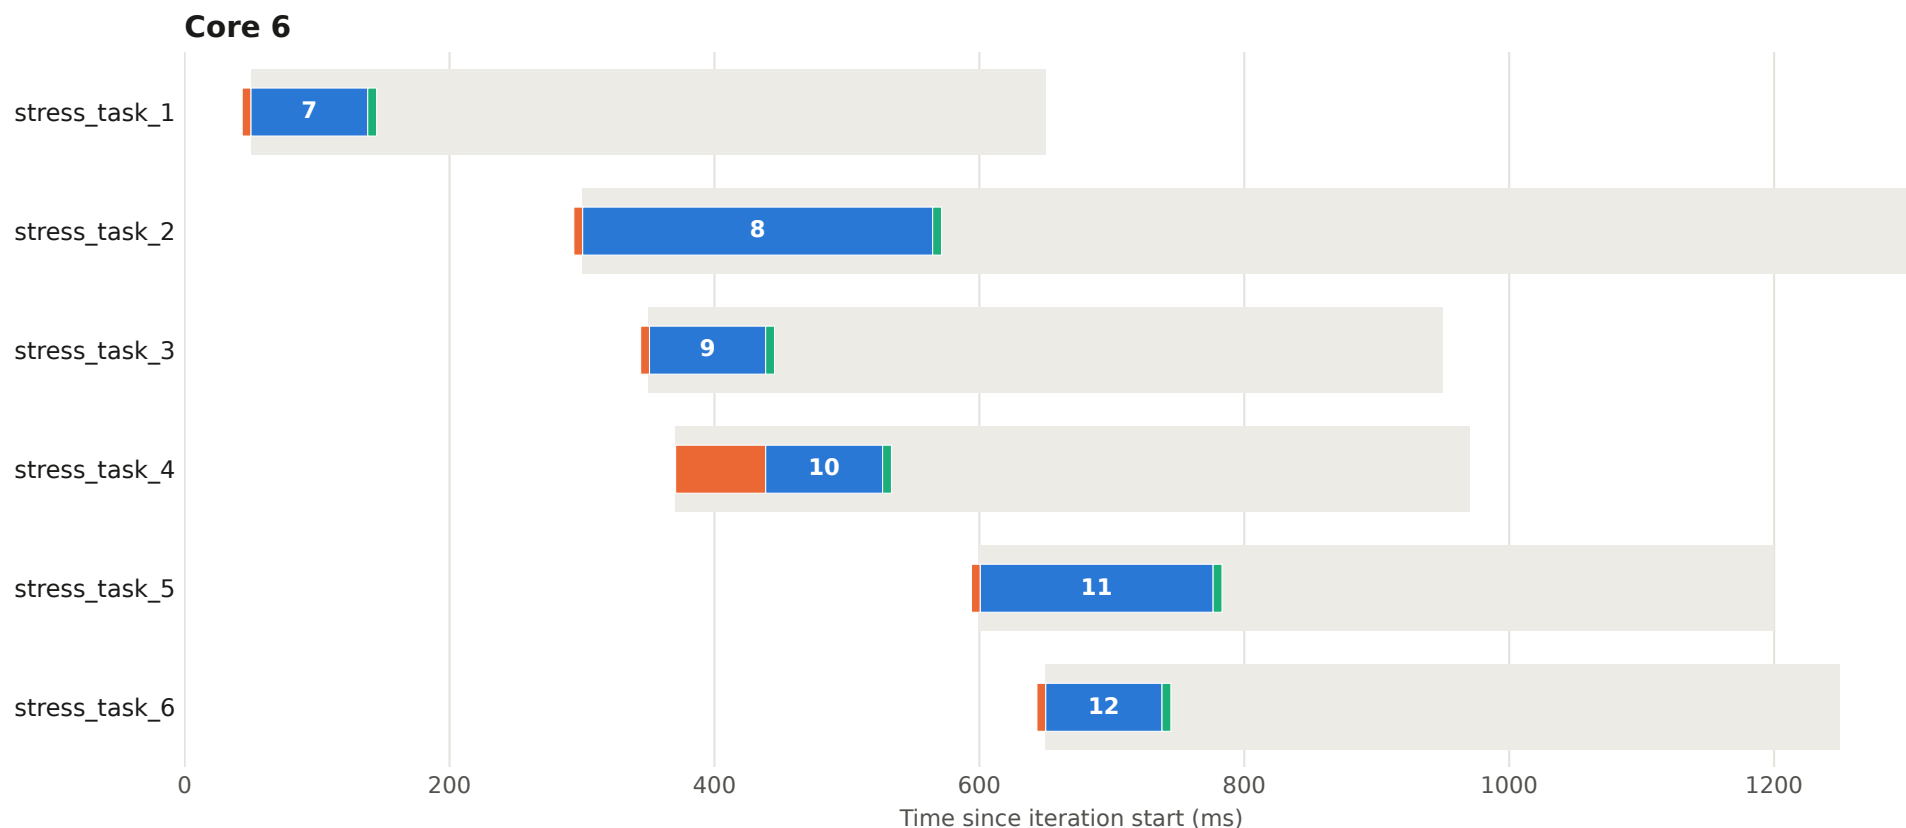


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 53 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

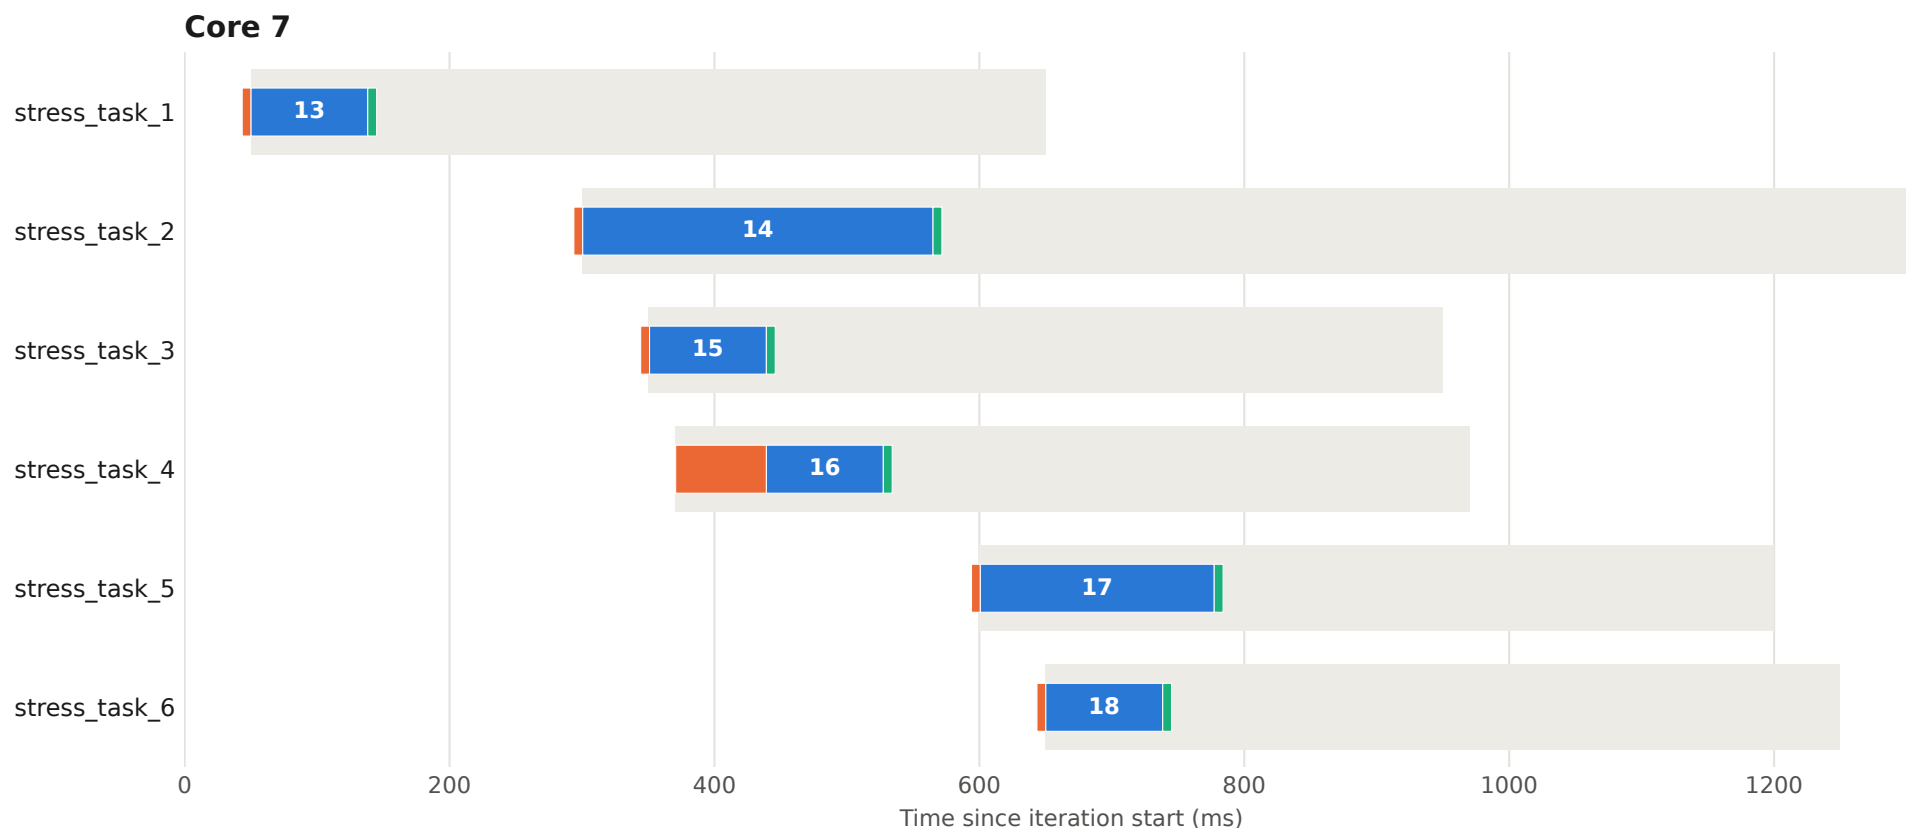


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 54 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

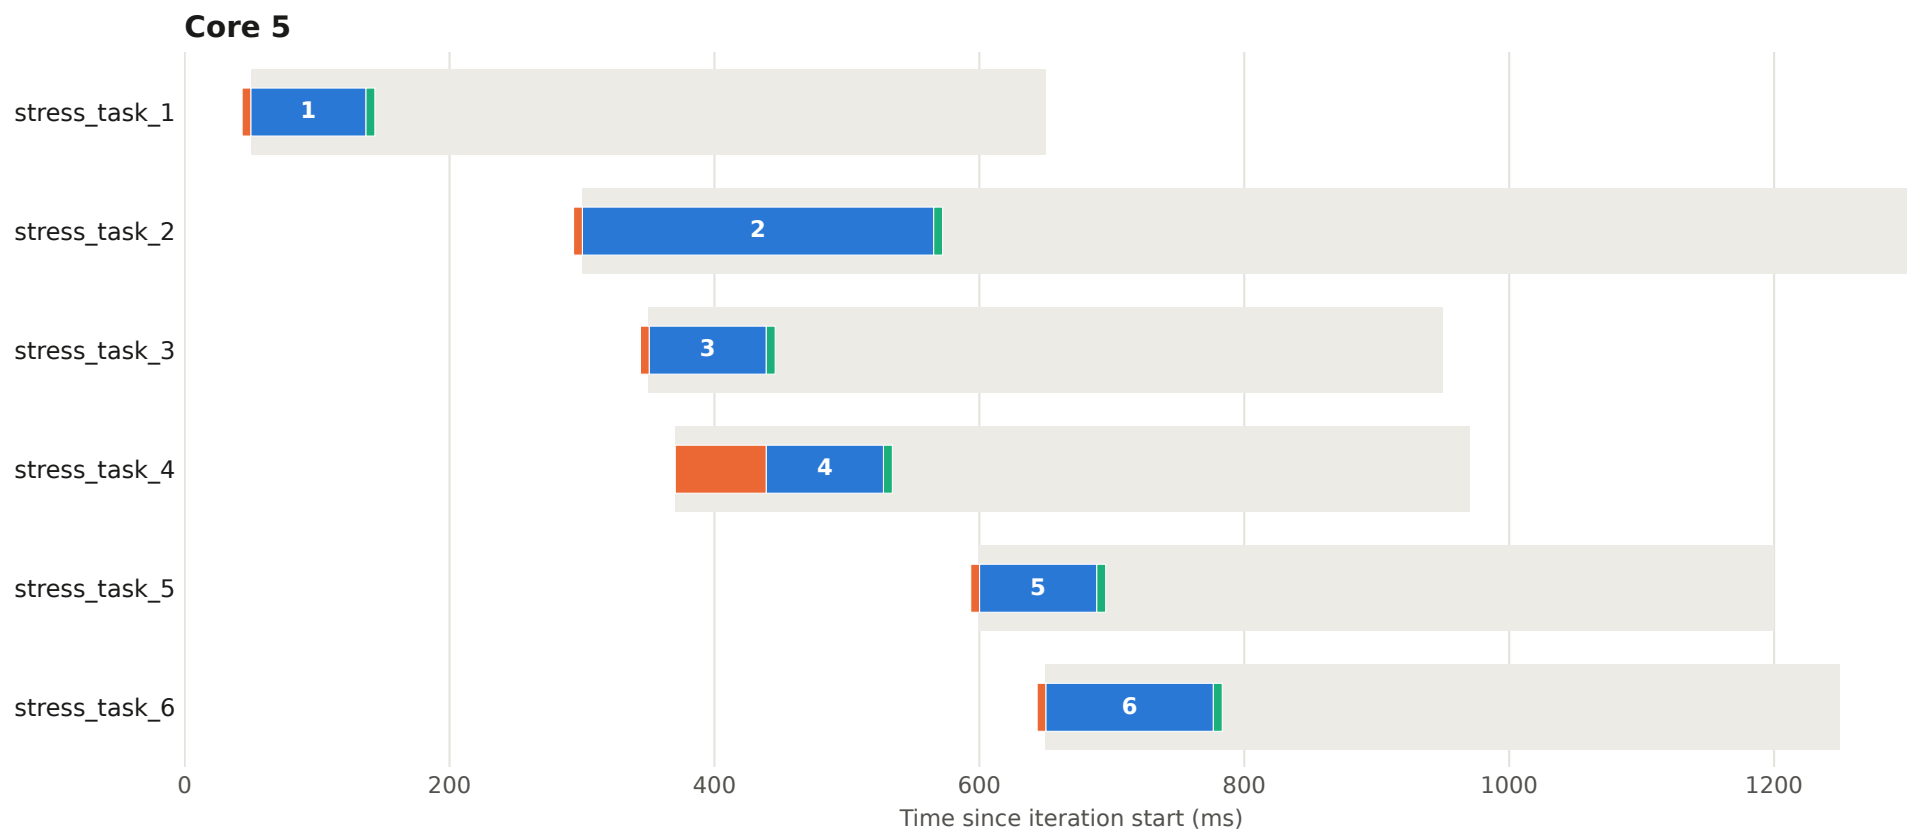


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 54 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

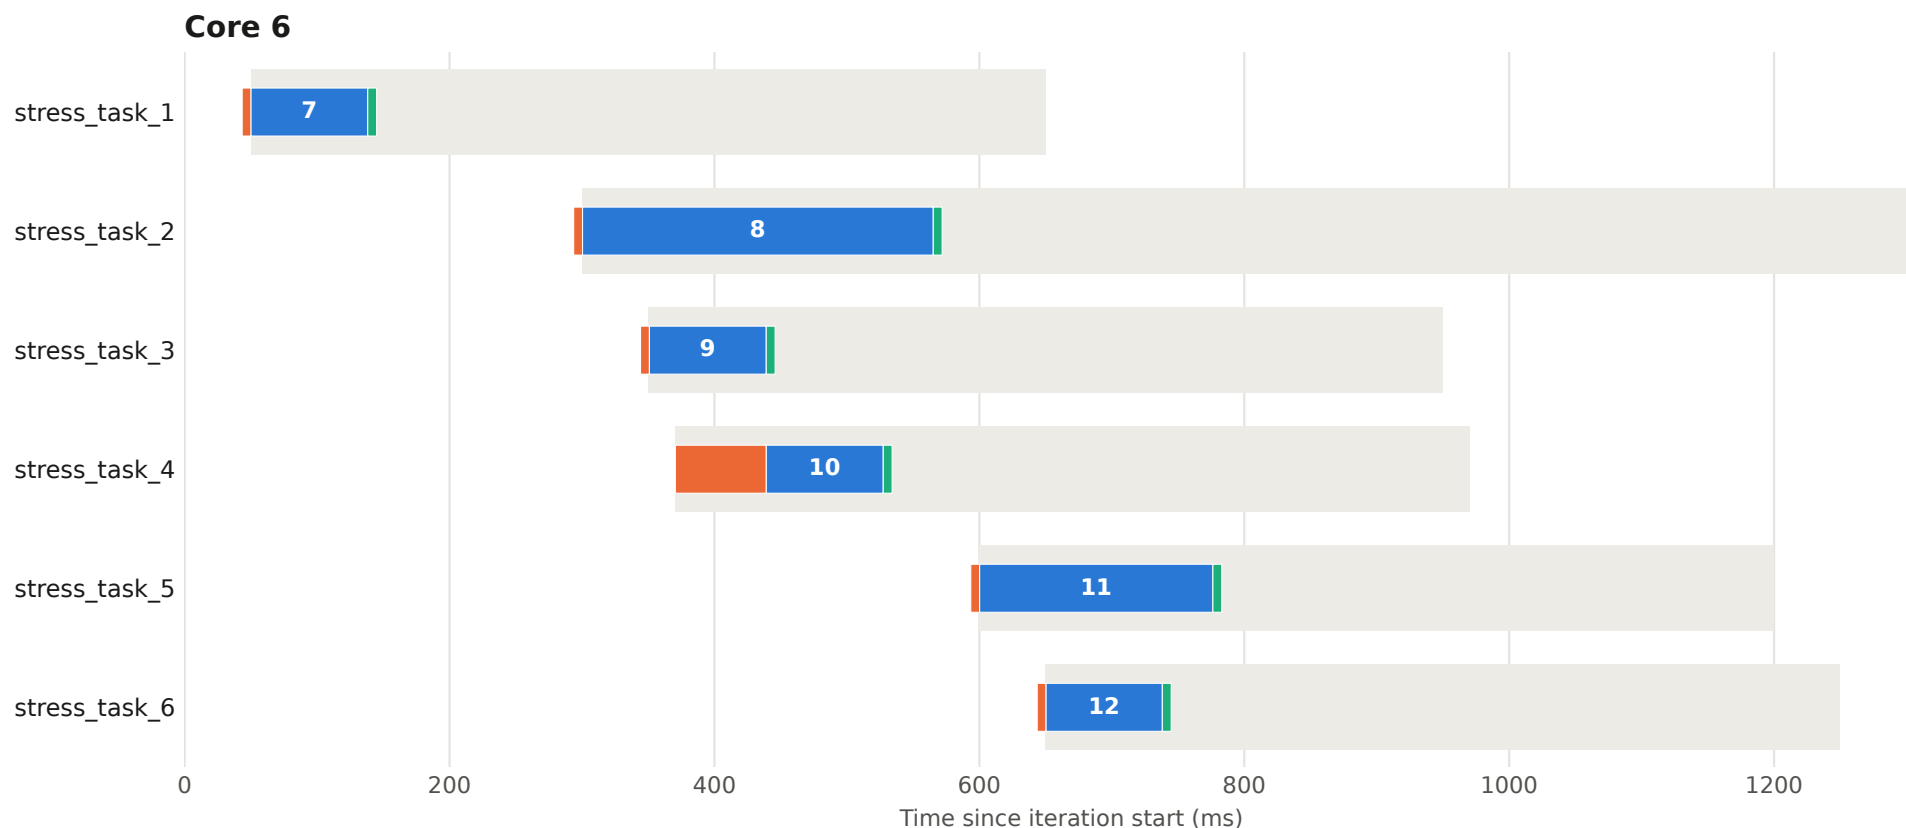


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 54 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

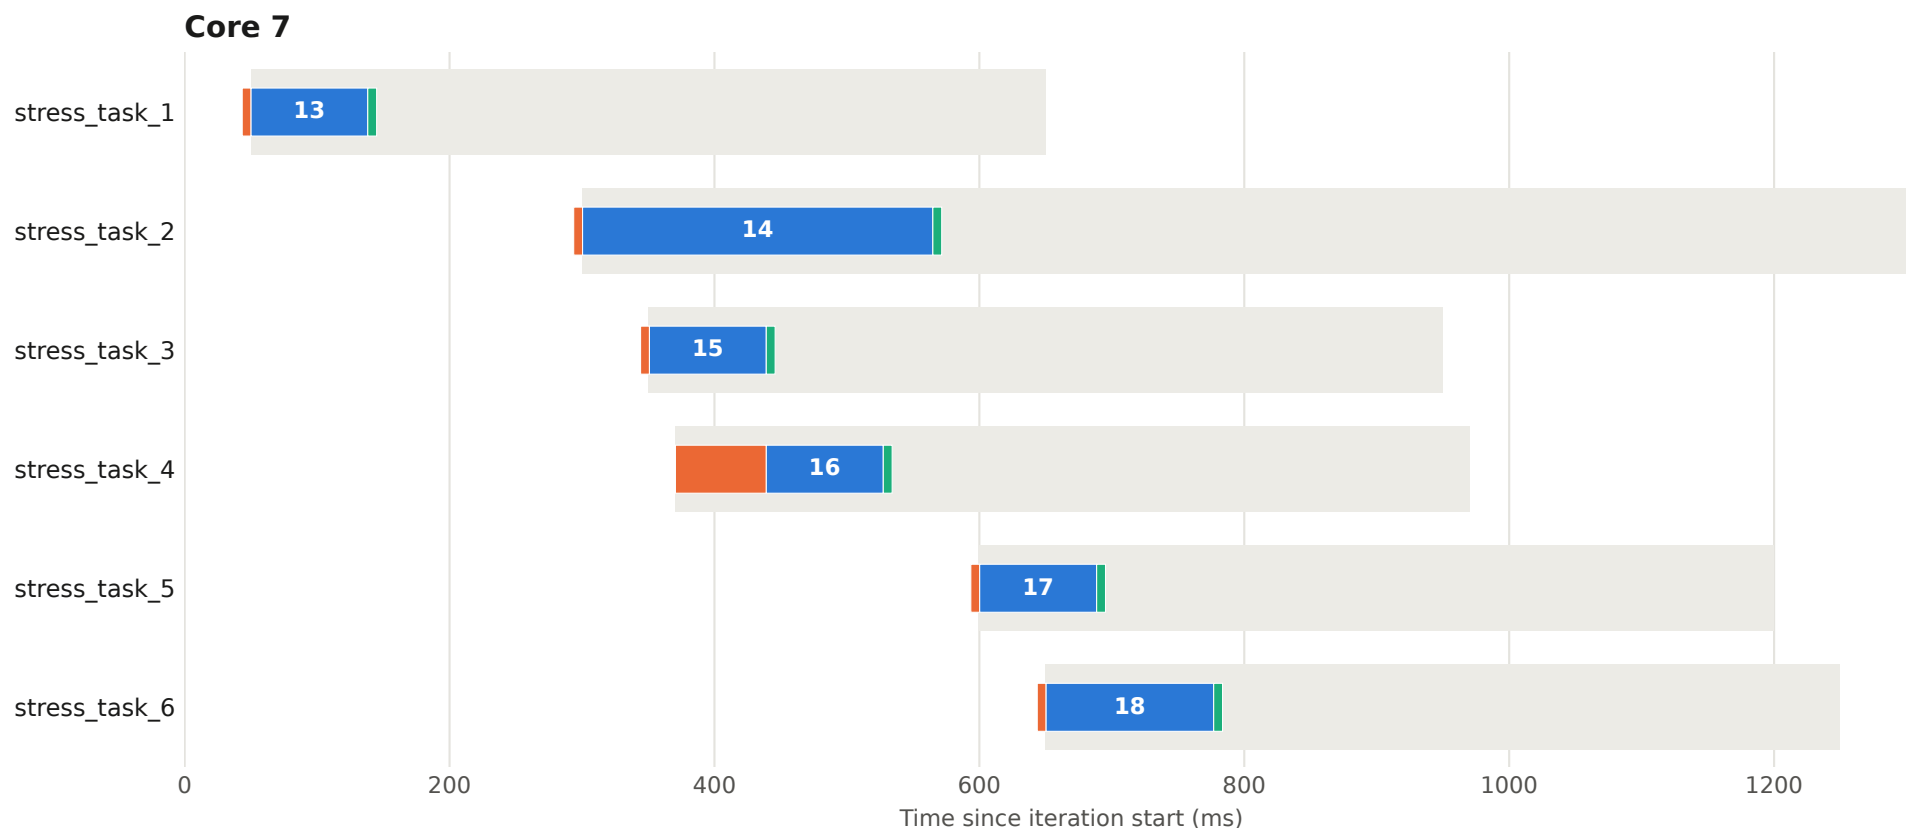


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 55 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

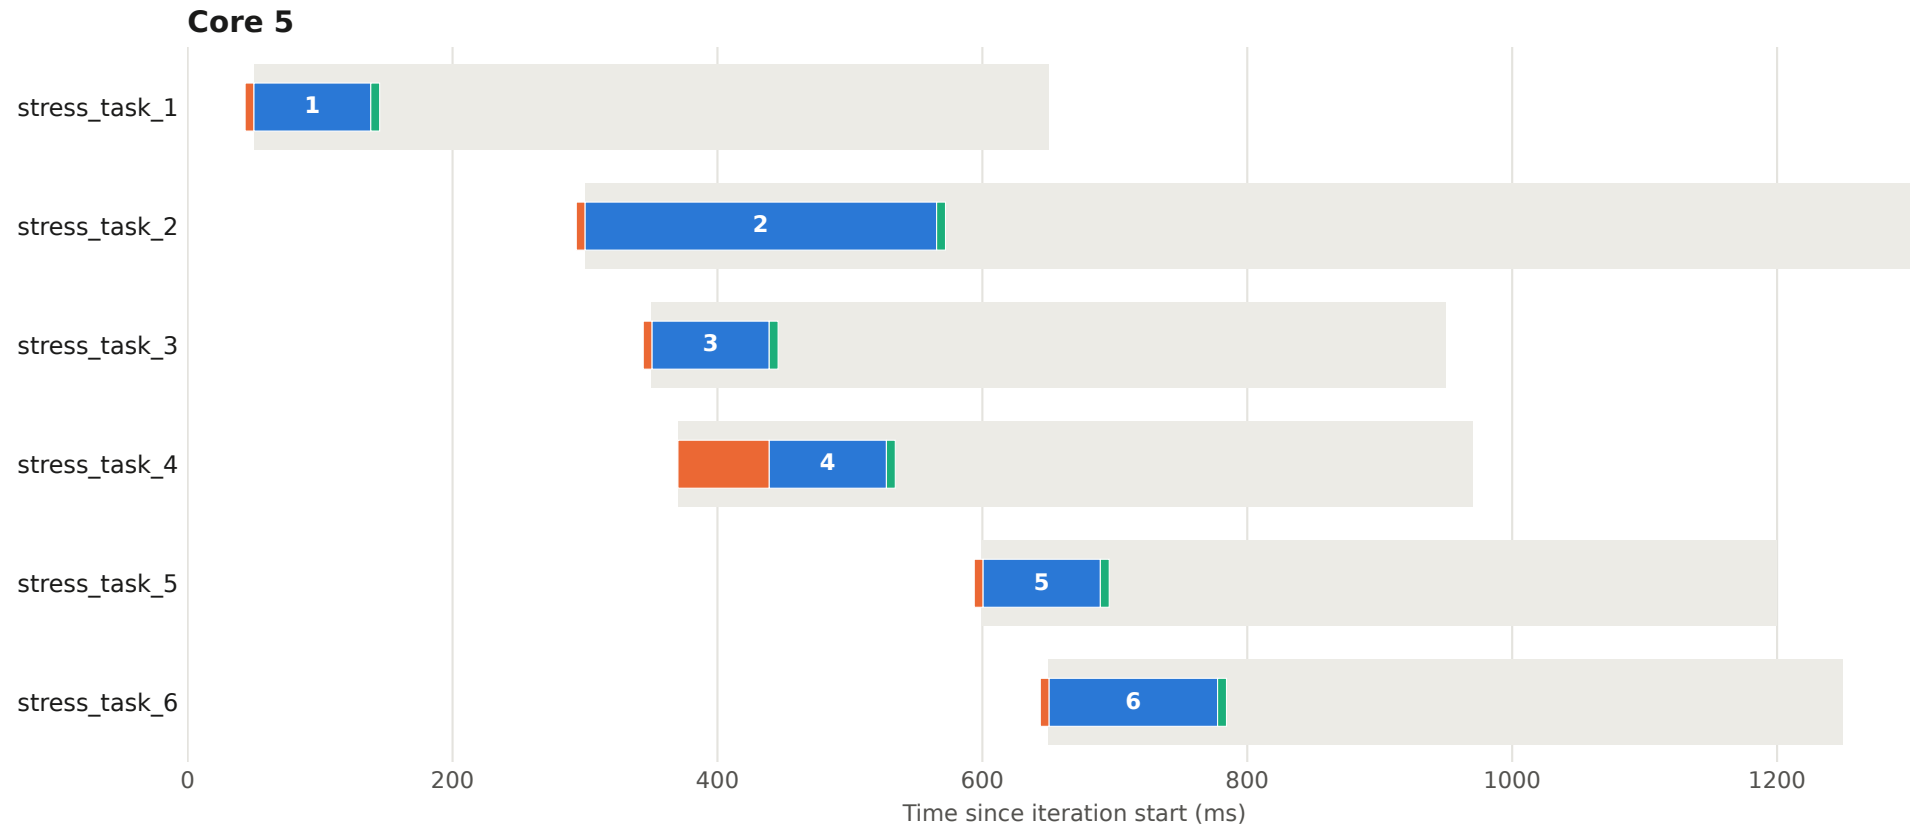


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 55 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

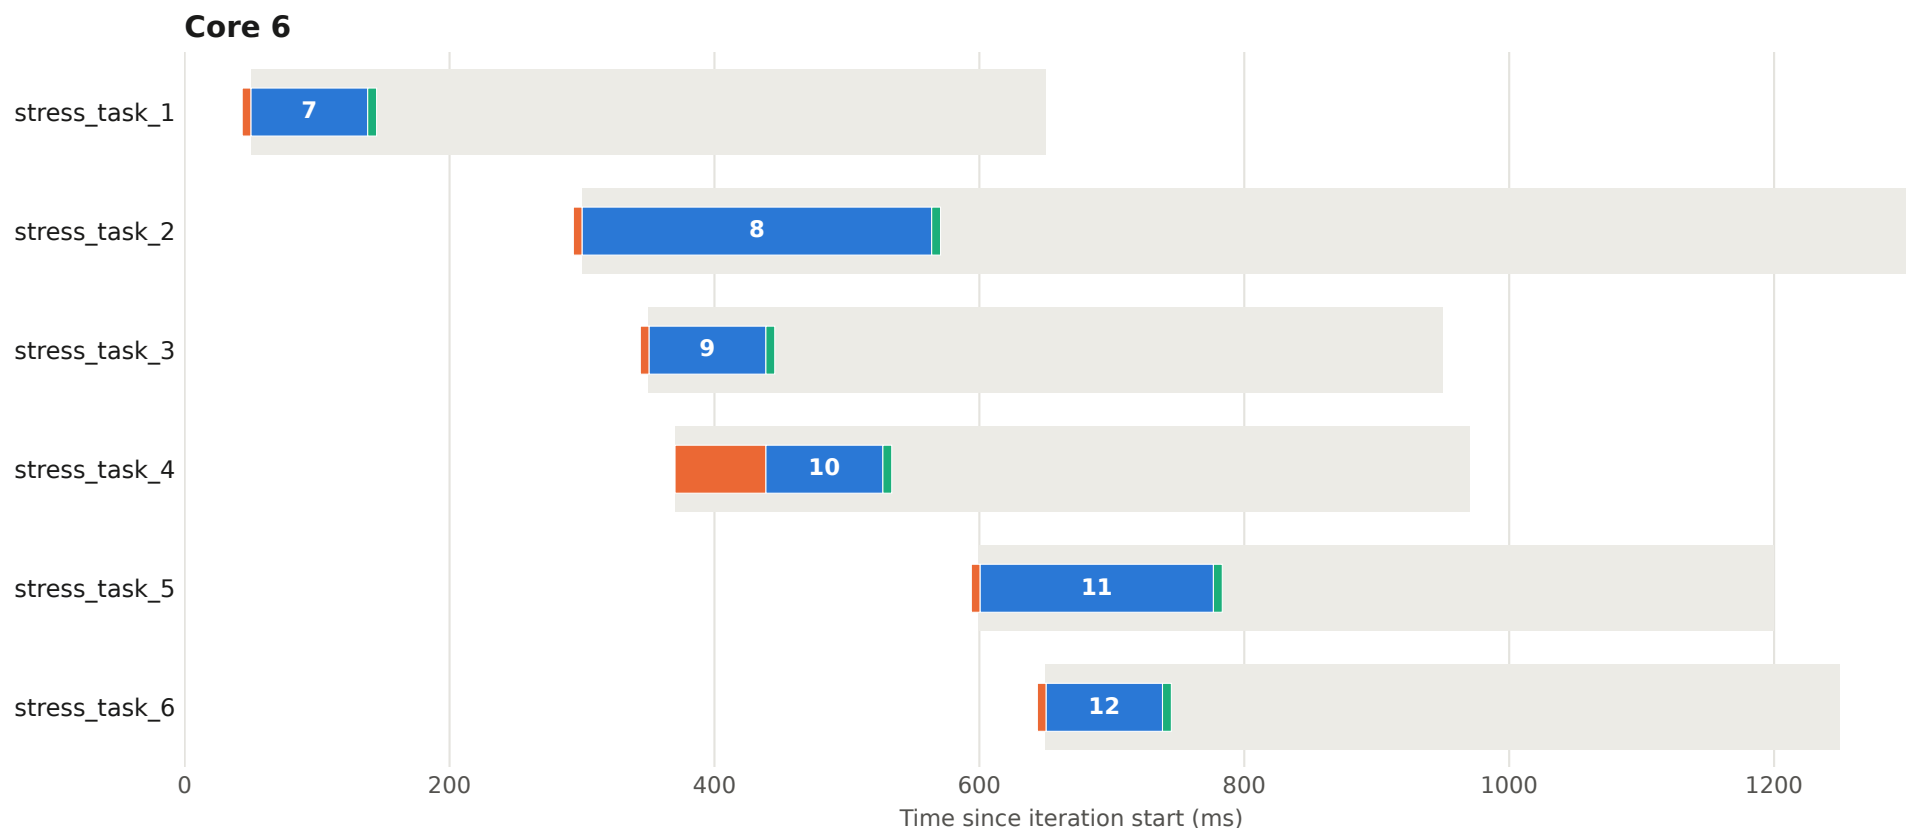


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 55 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

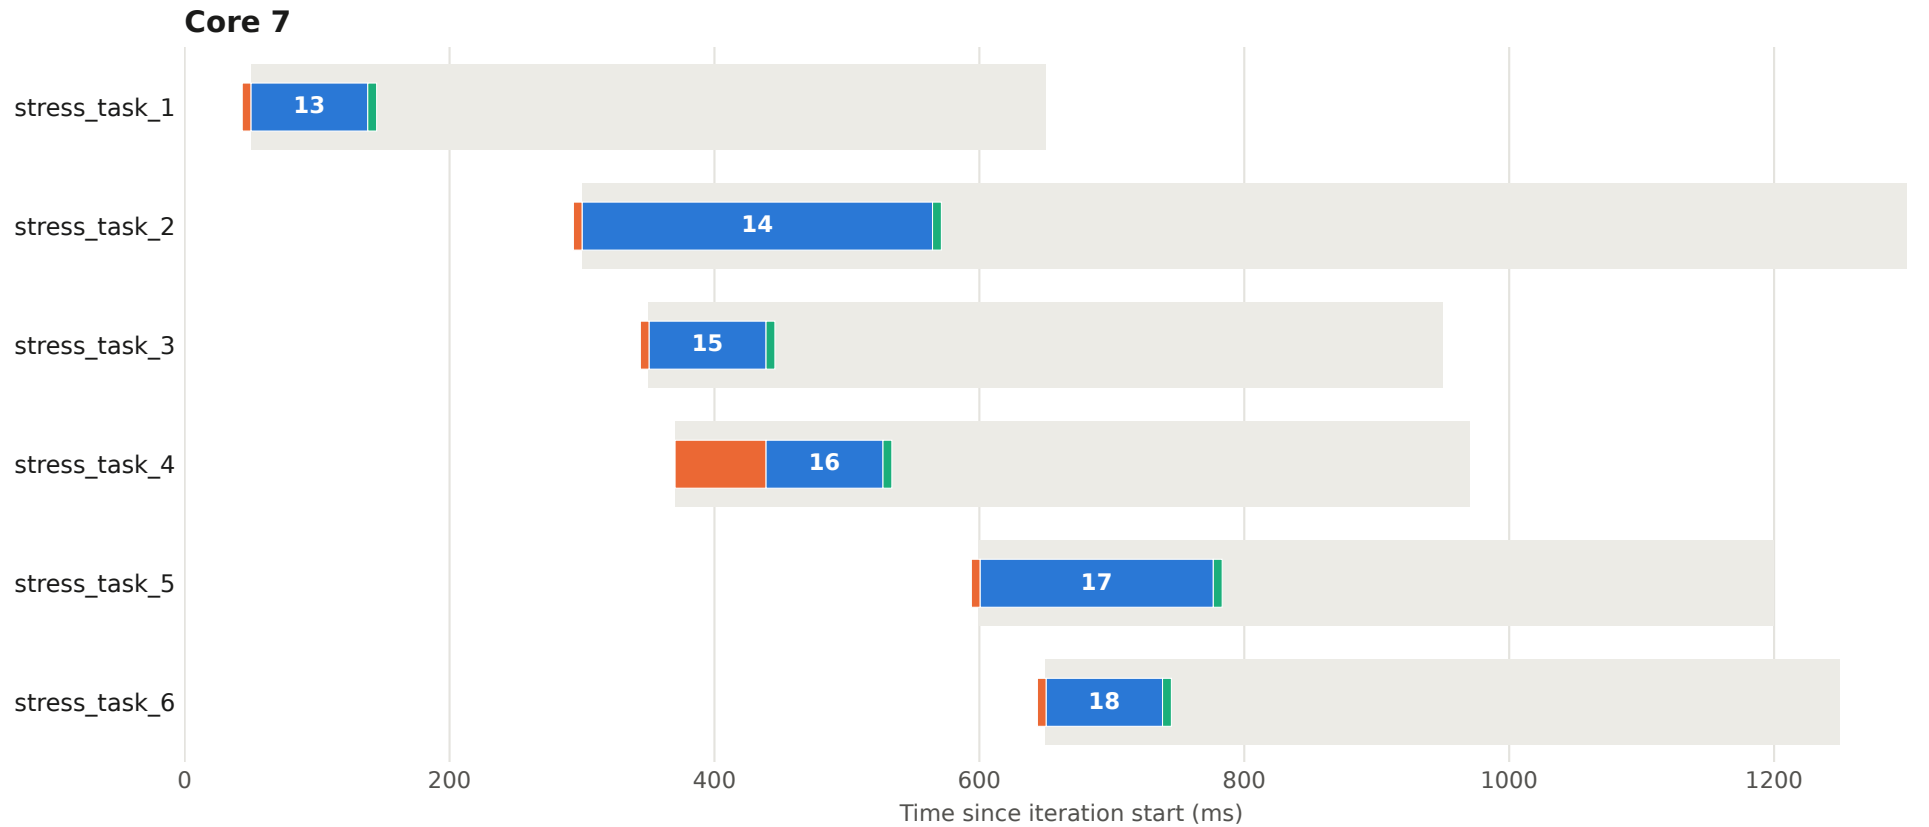


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 56 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

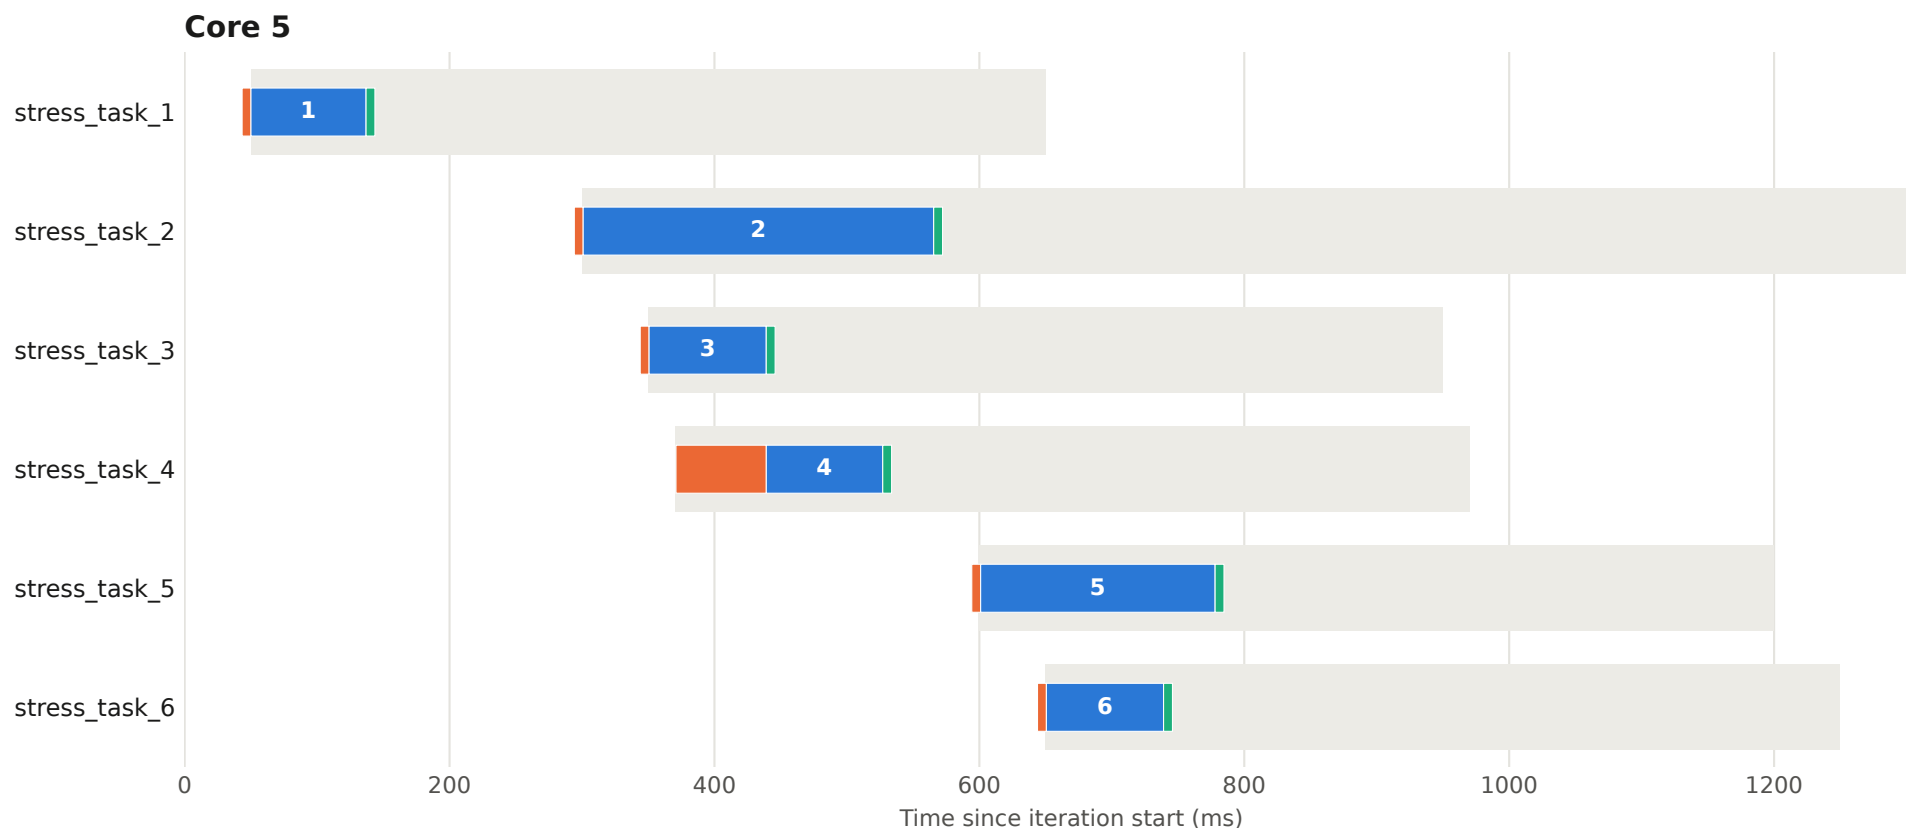


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 56 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

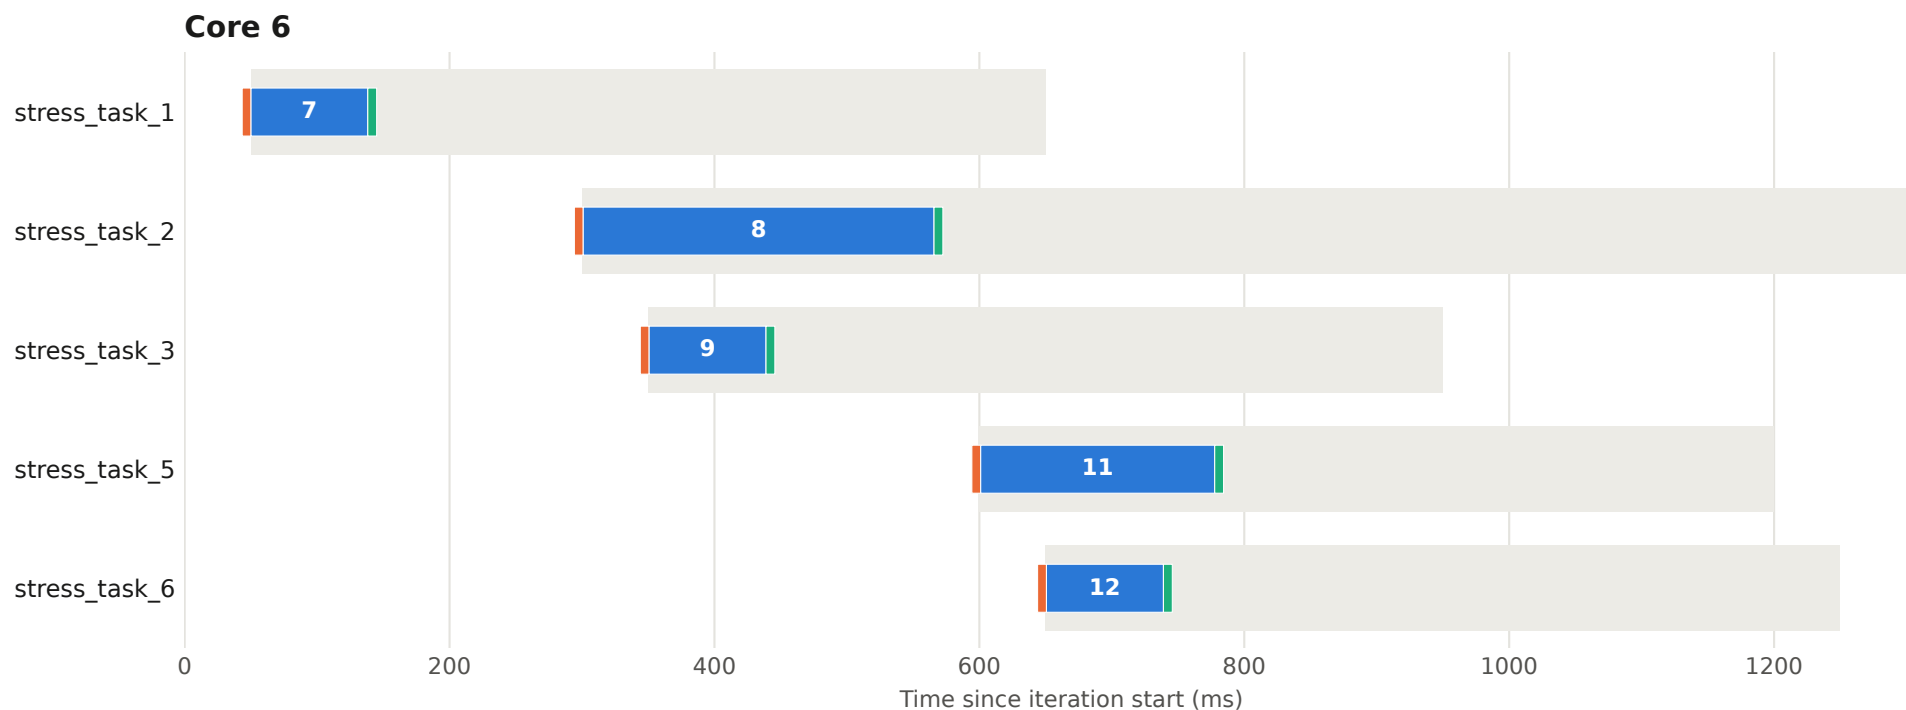


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 56 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

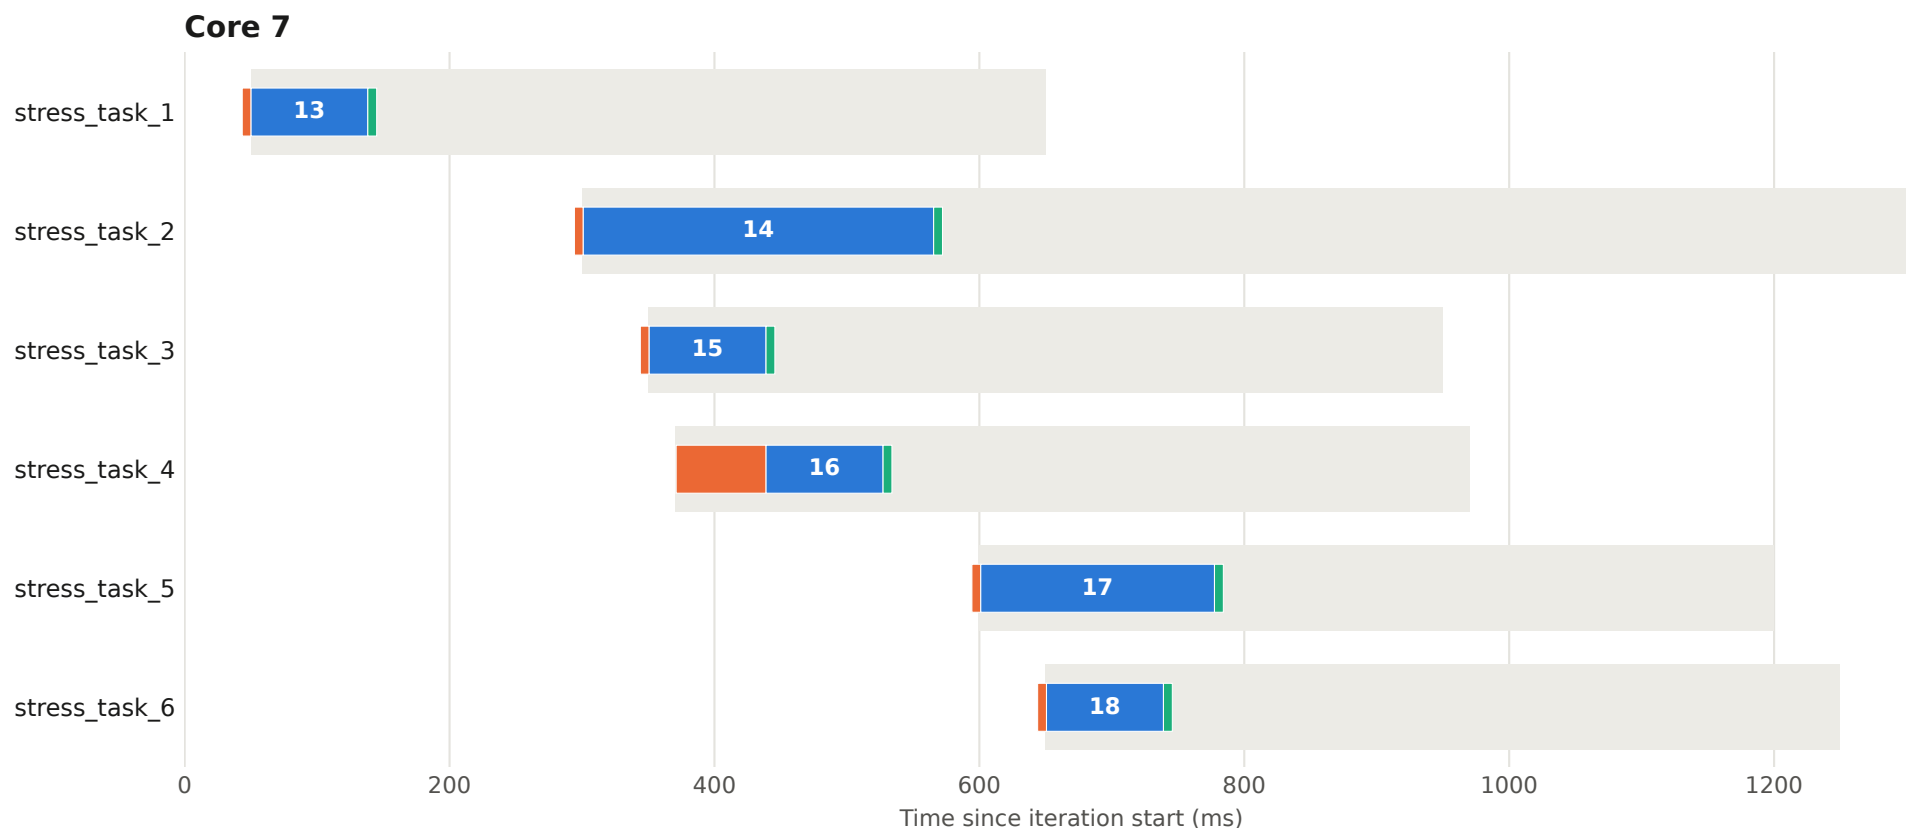


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 57 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

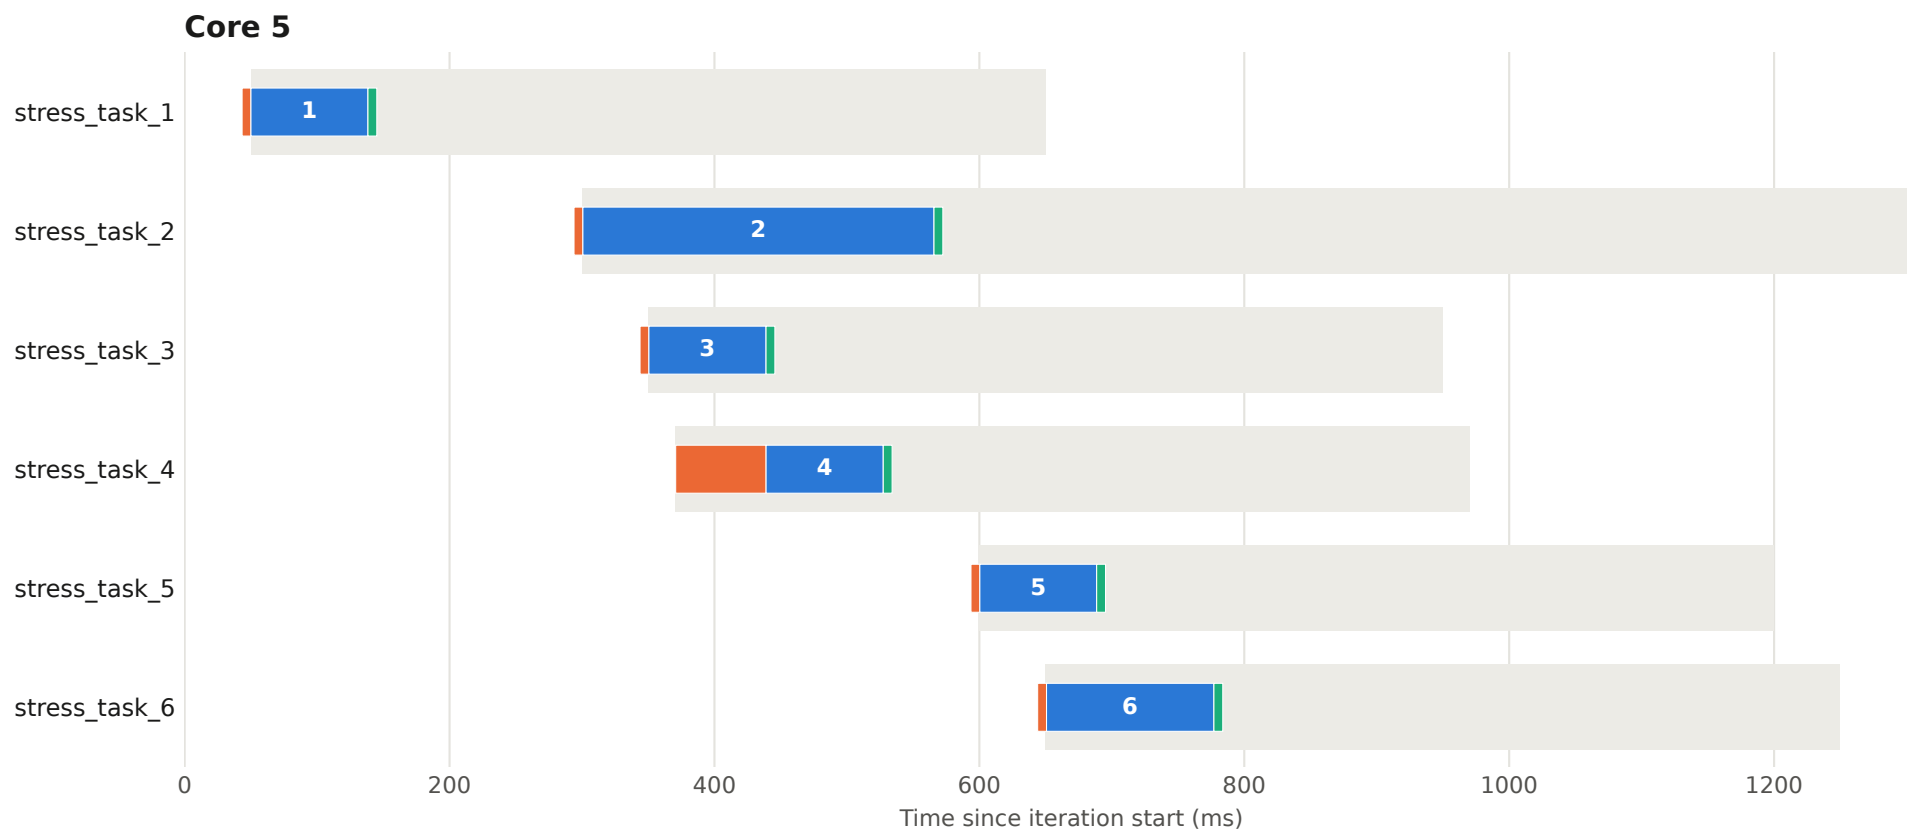


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 57 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

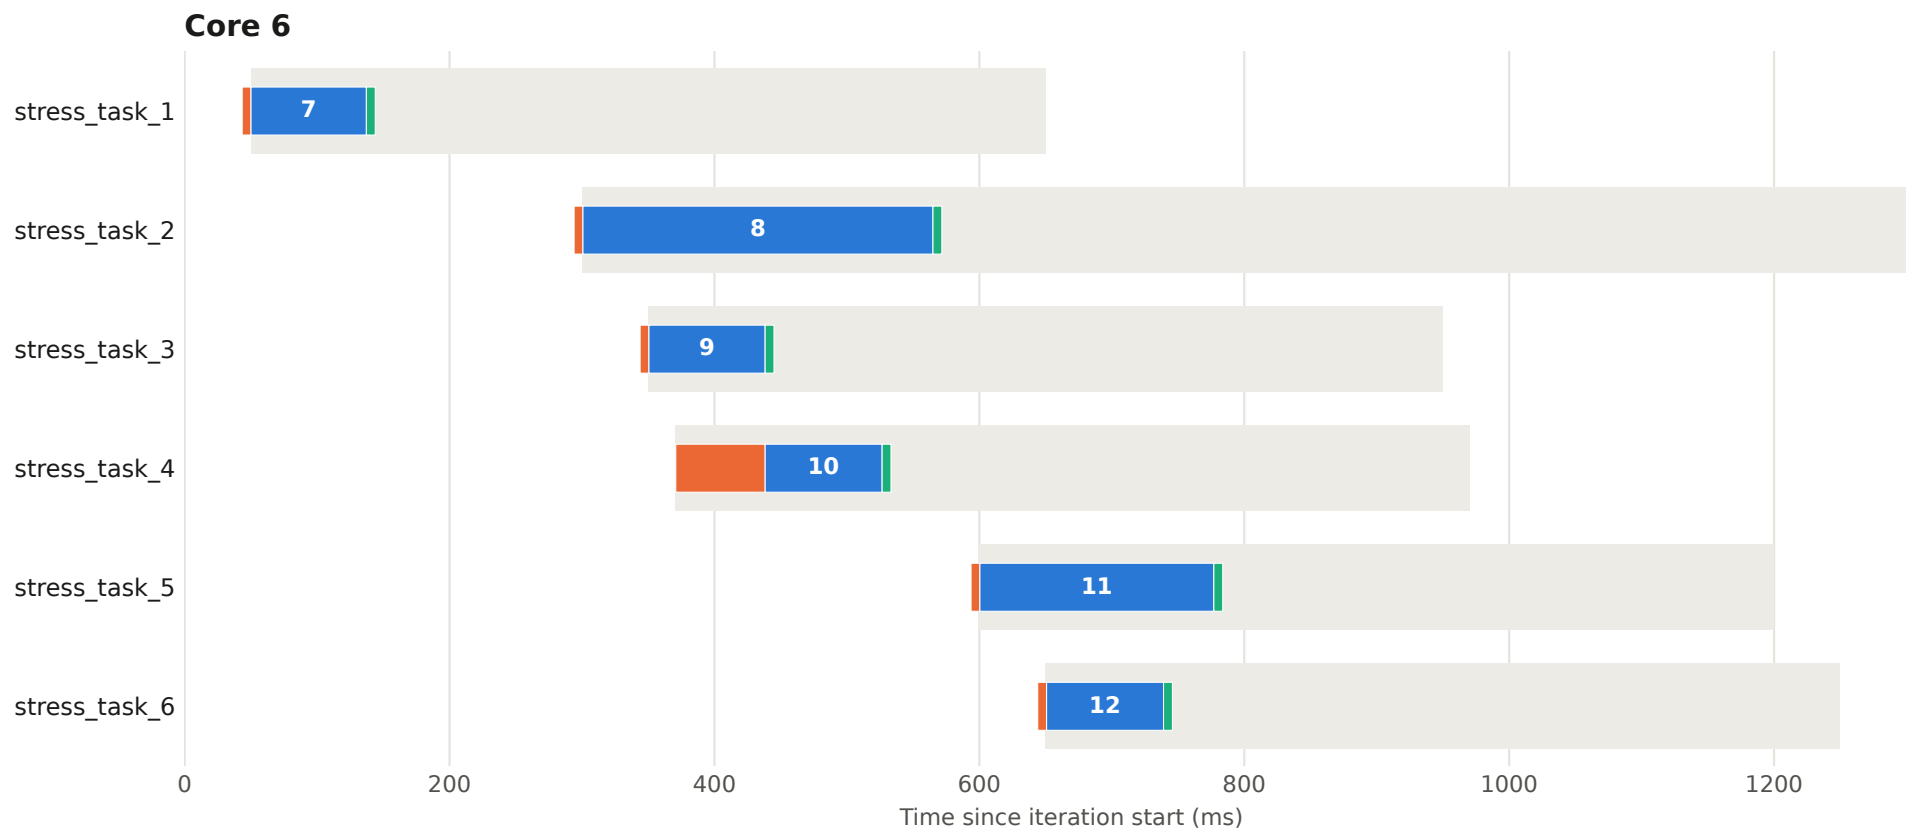


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 57 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

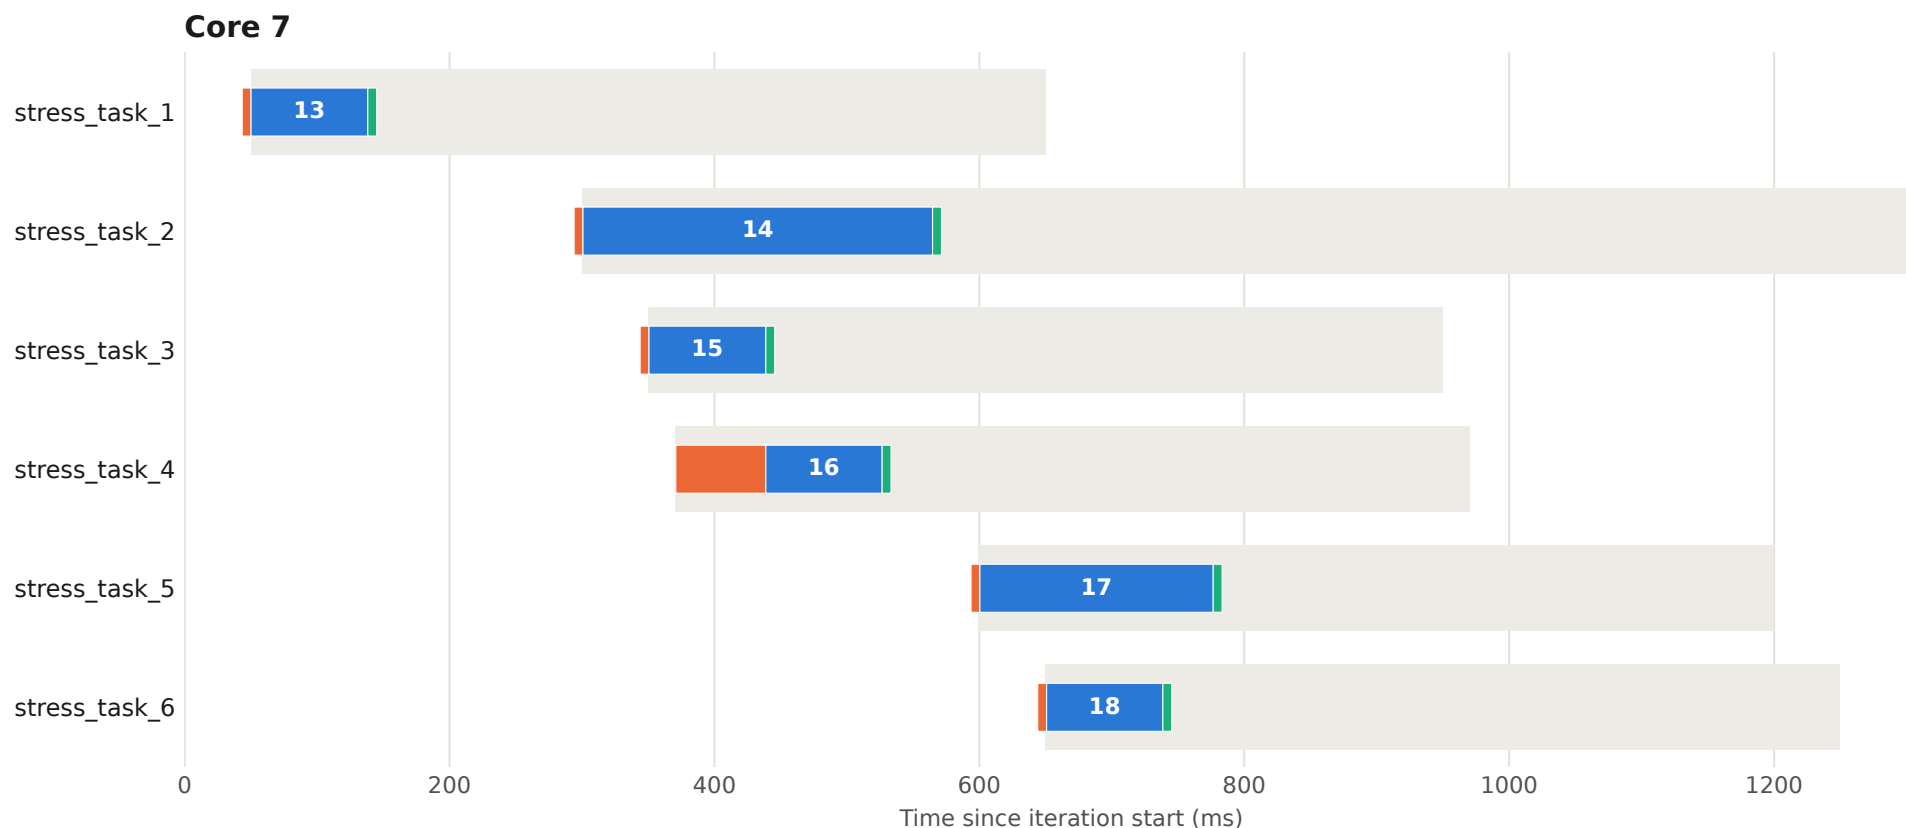


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 58 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

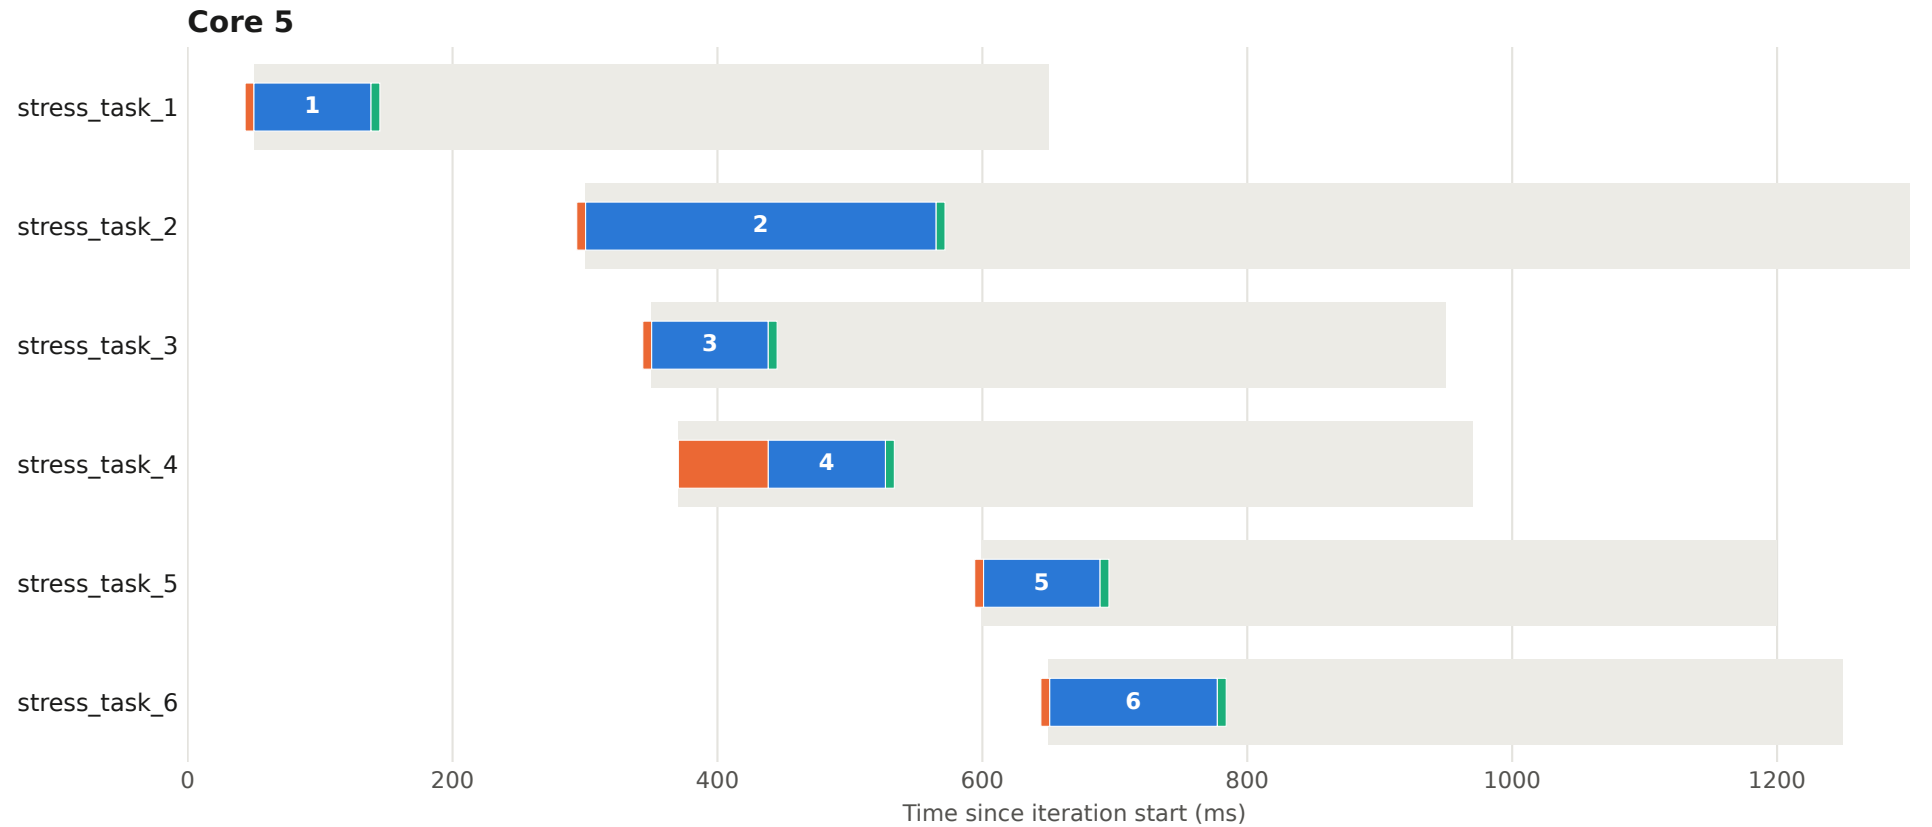


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 58 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

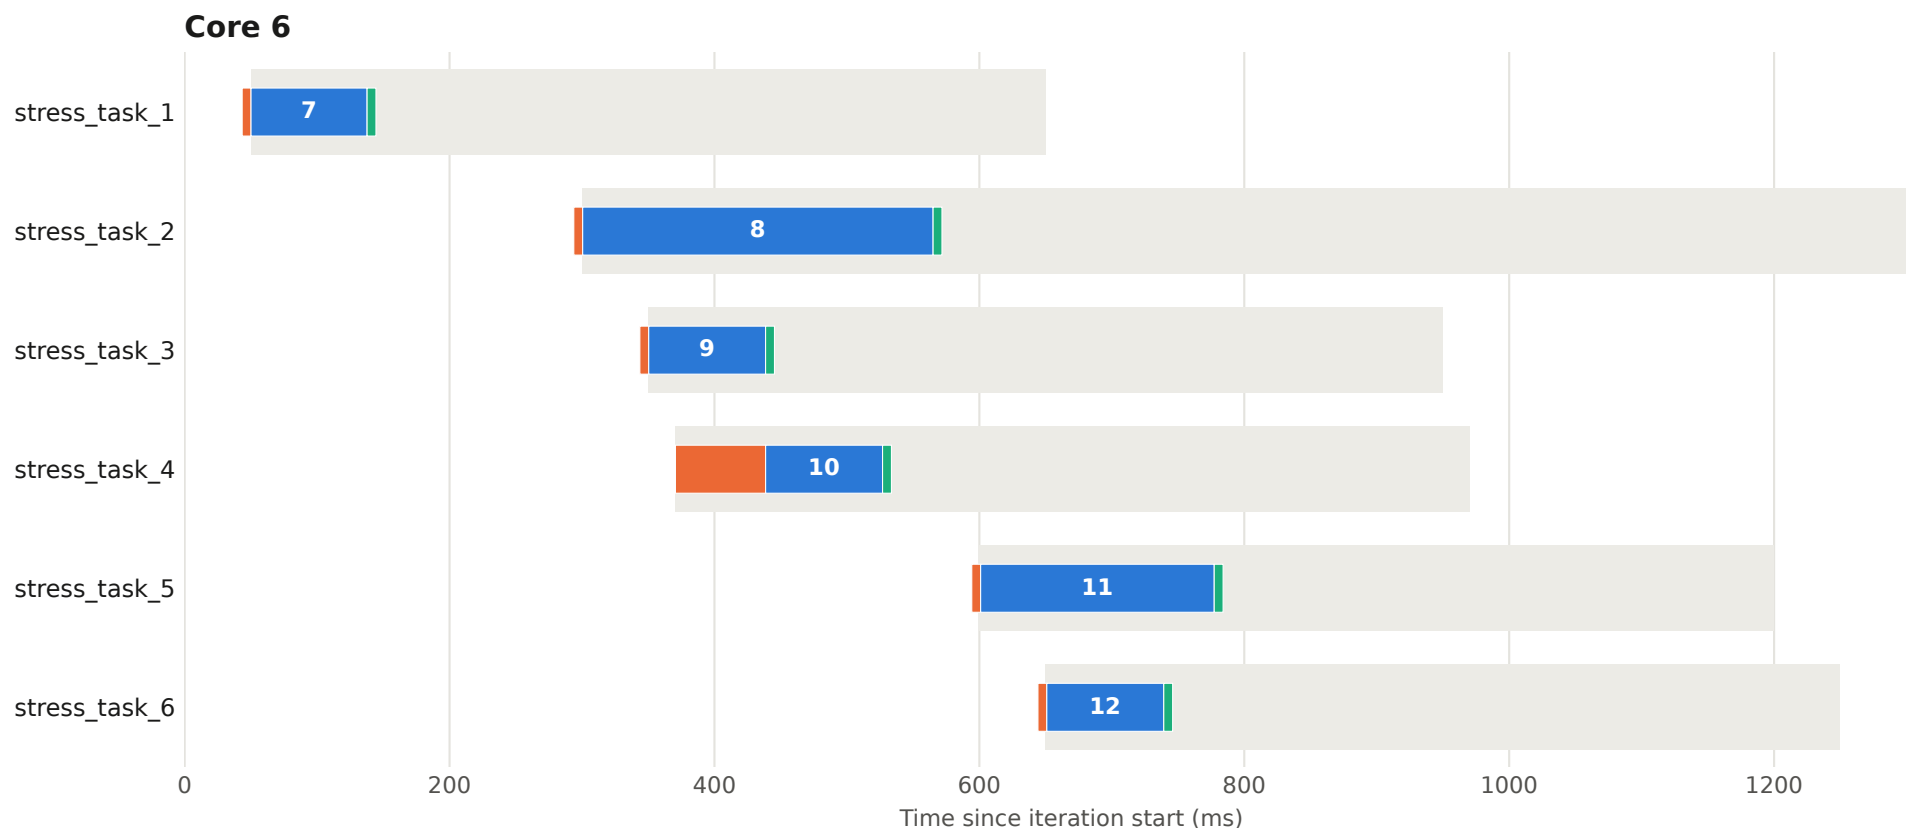


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 58 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

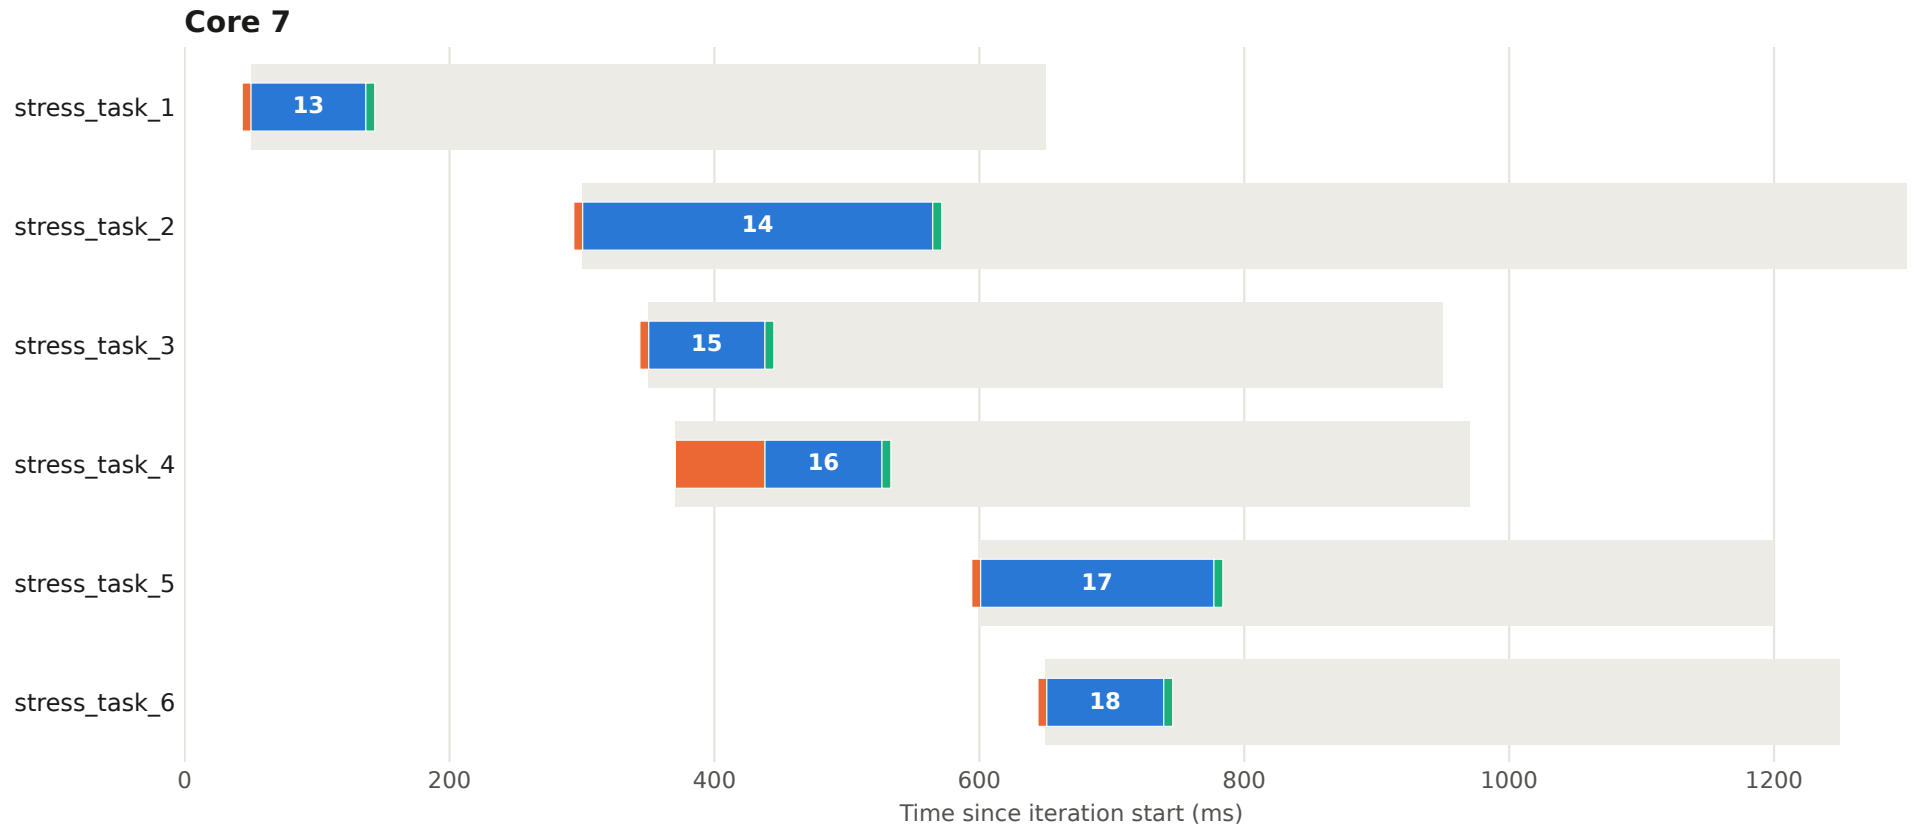


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 59 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

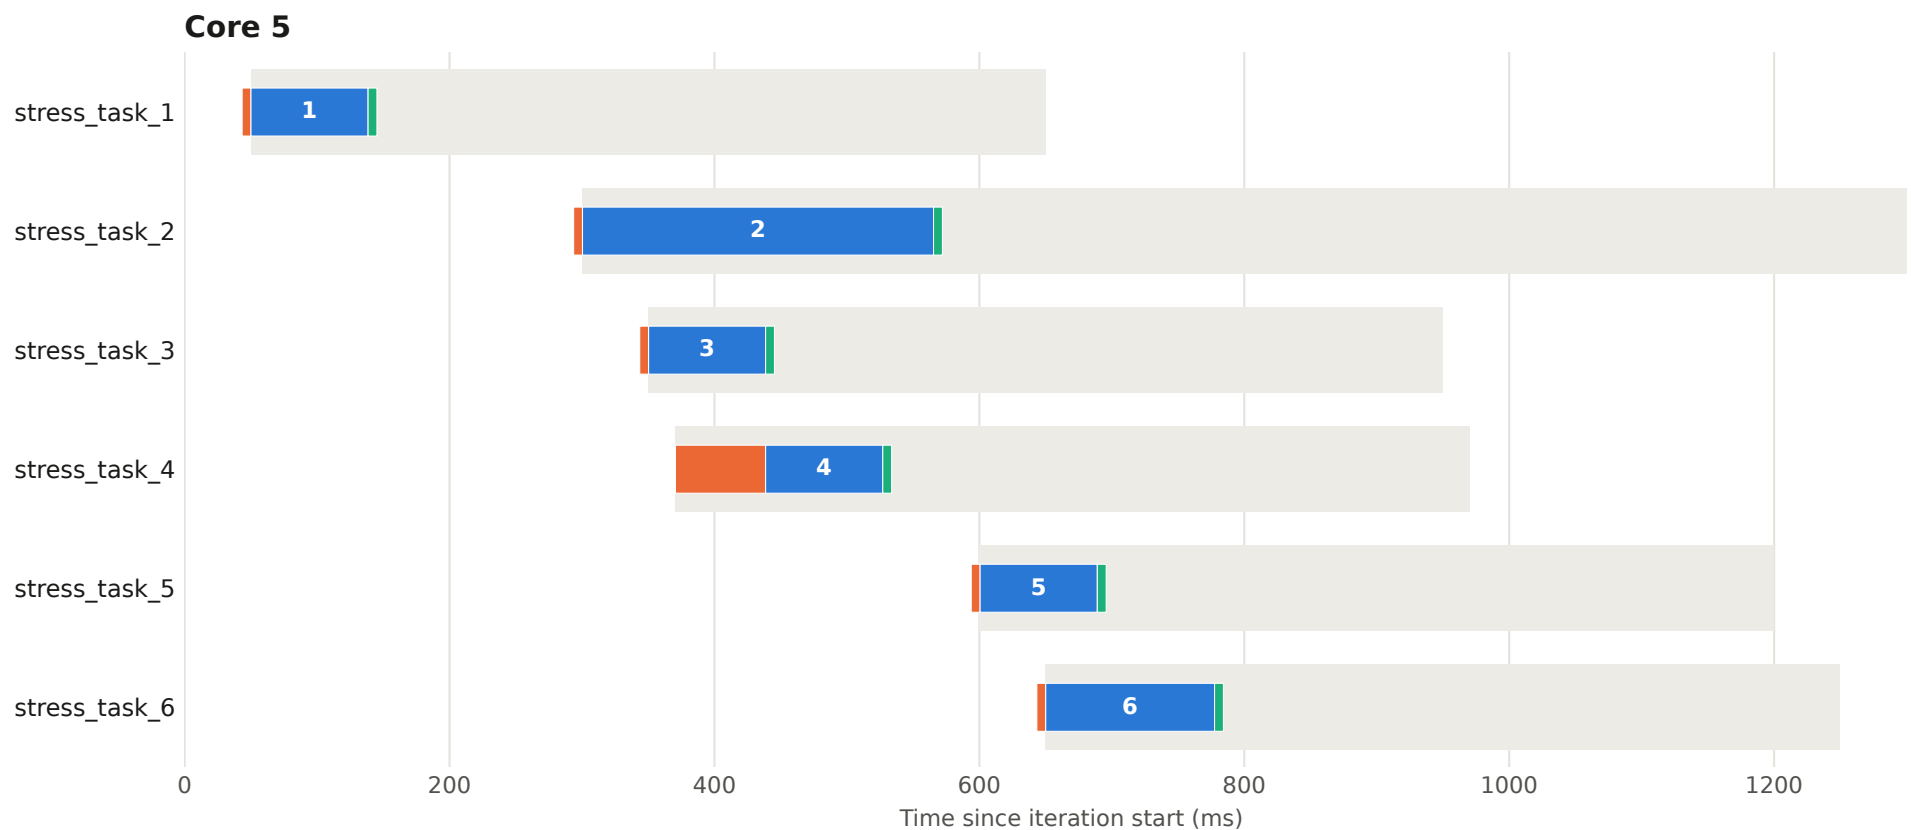


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 59 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

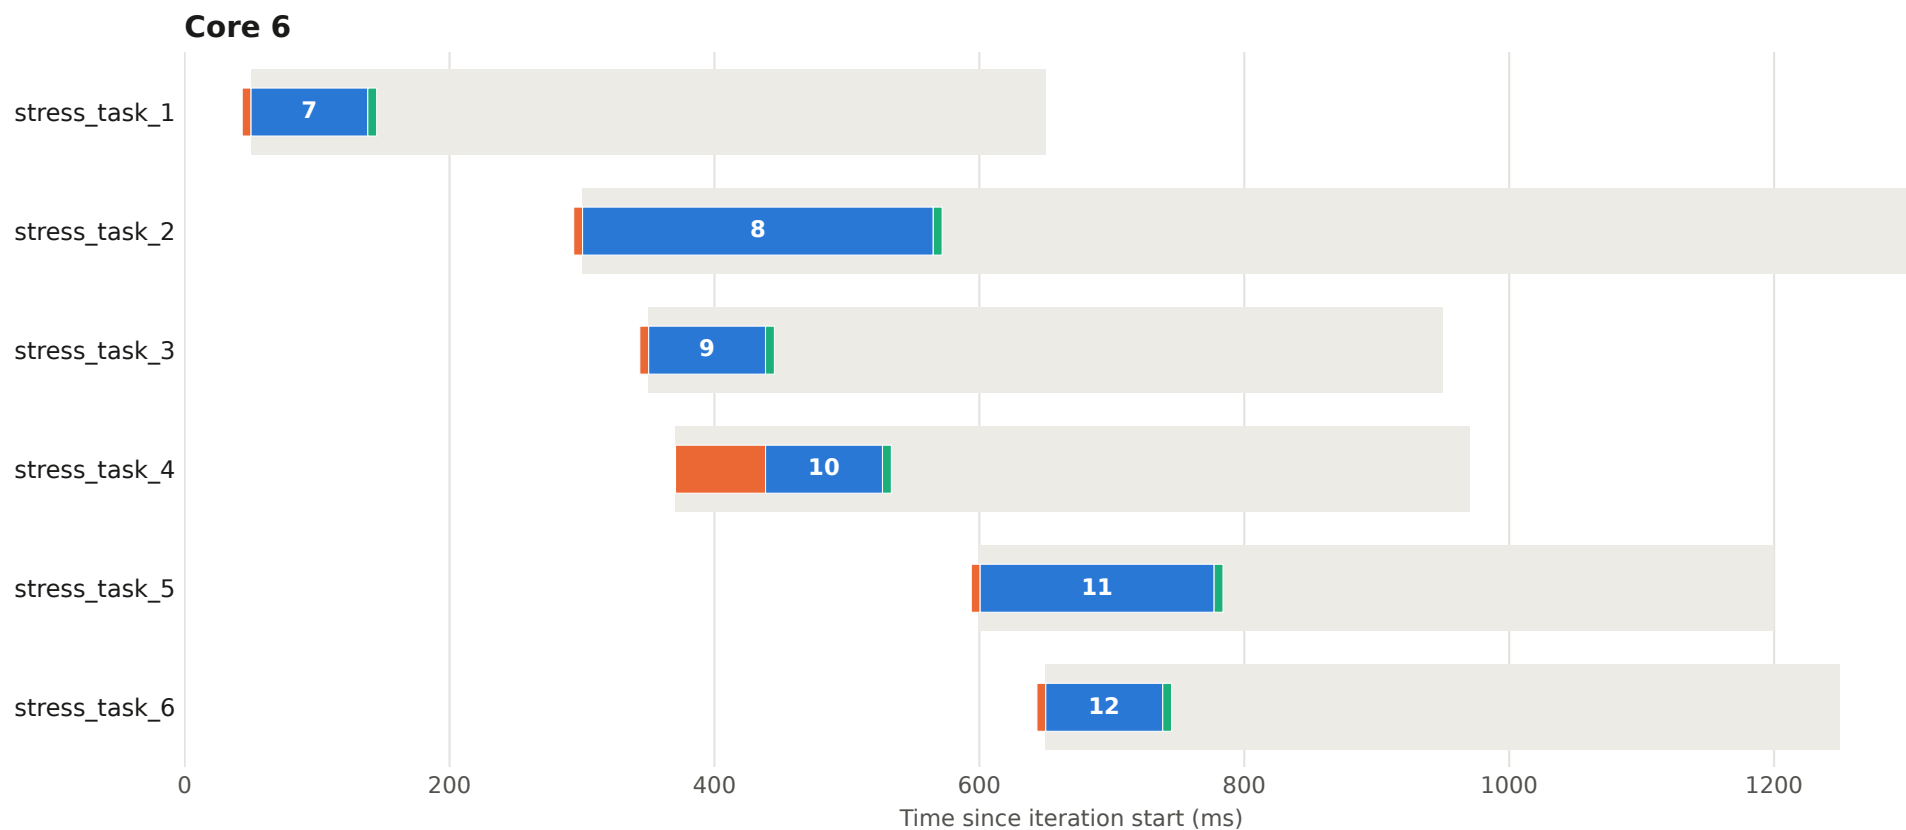


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 59 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

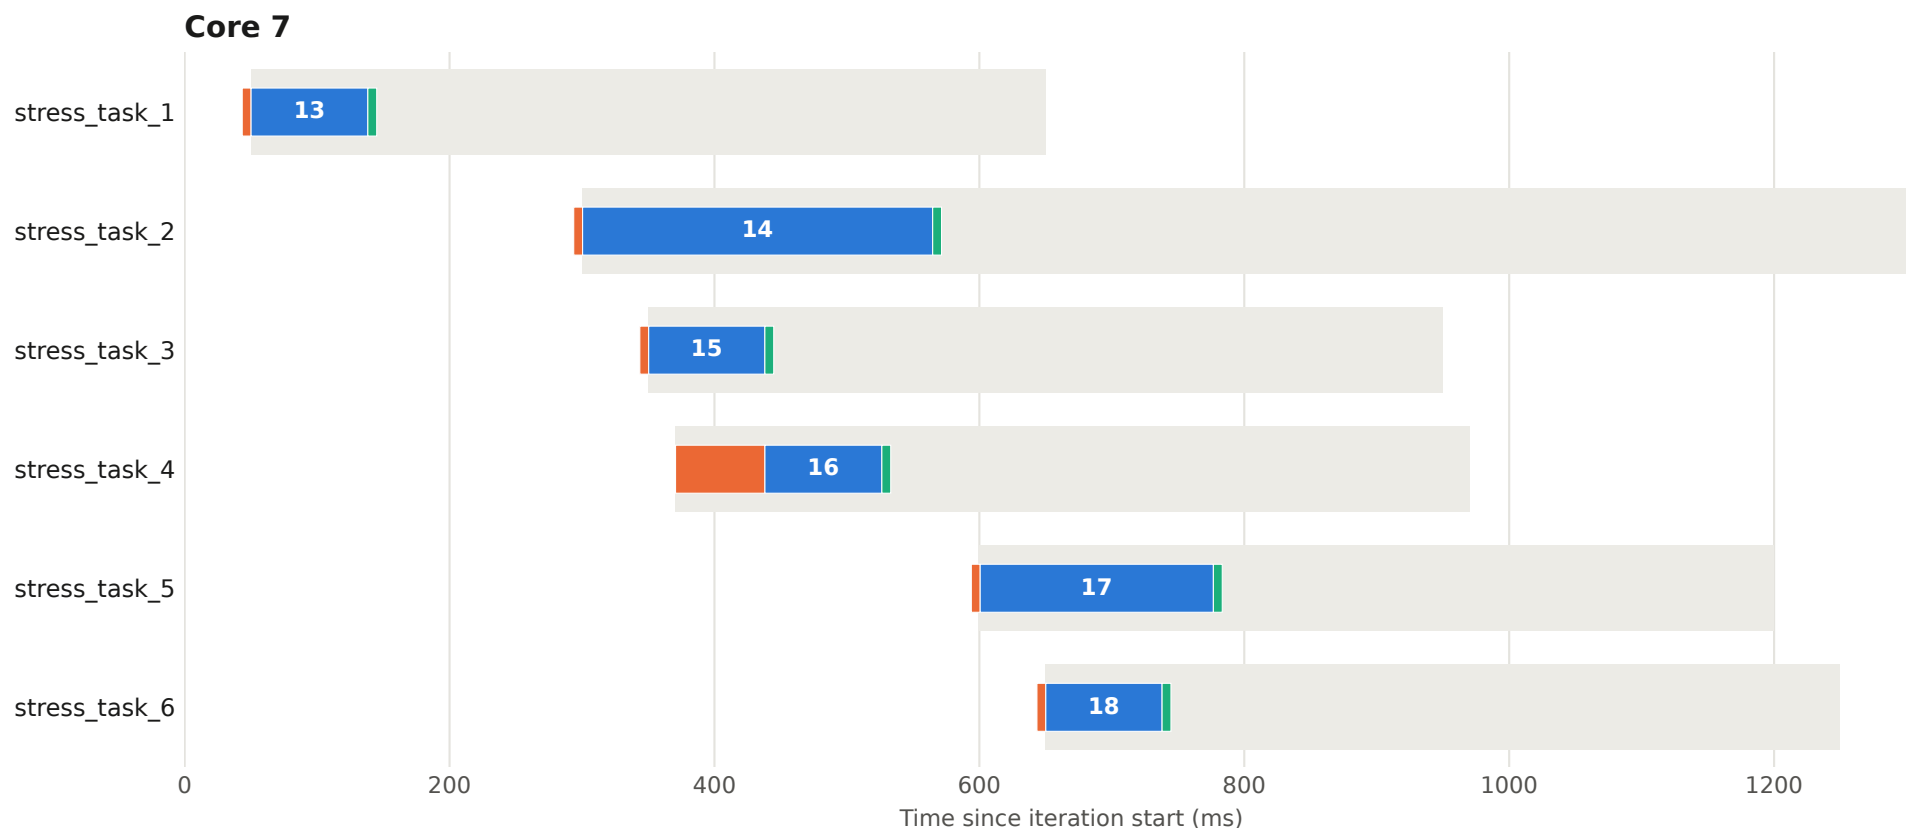


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 60 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

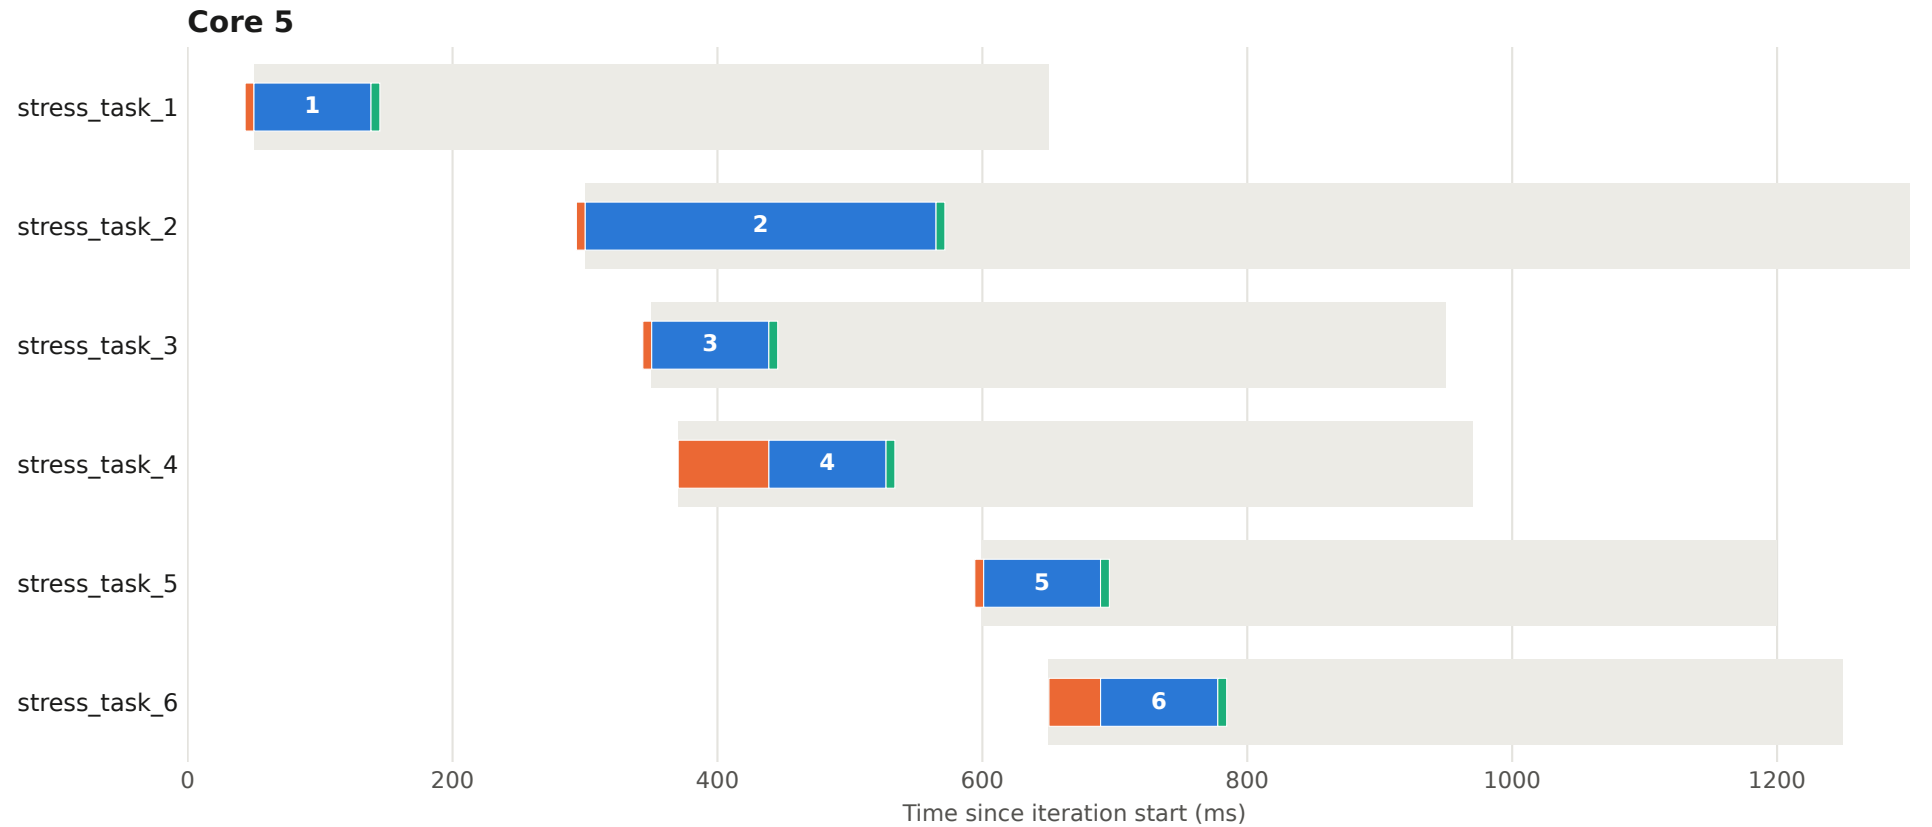


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 60 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

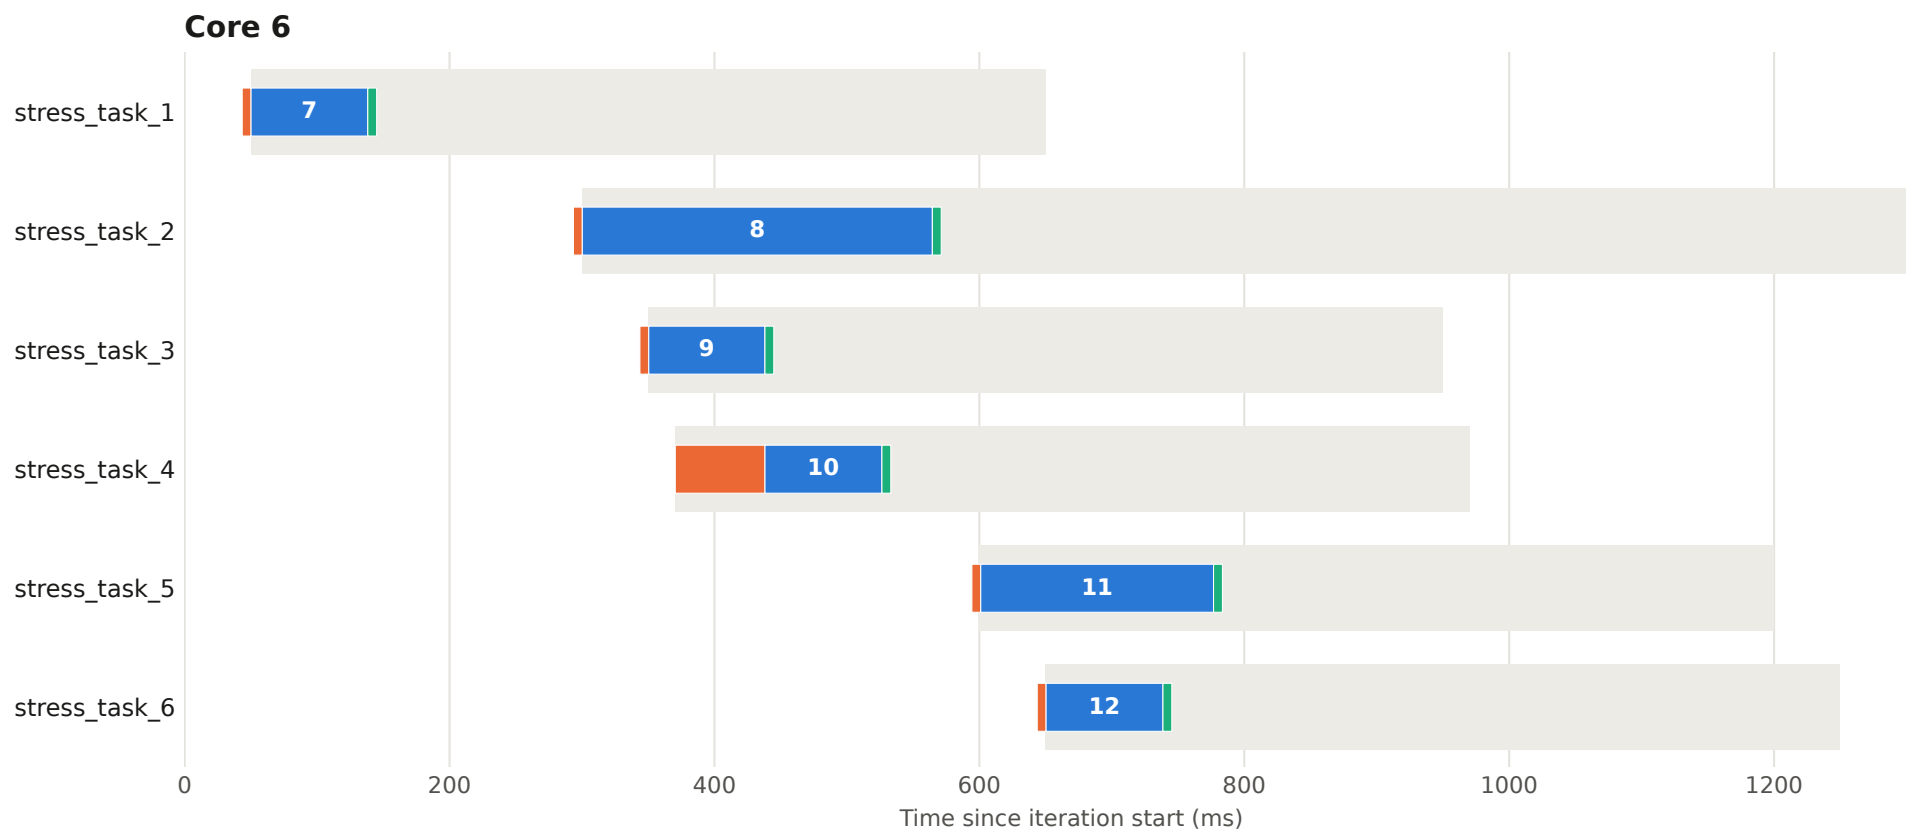


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 60 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

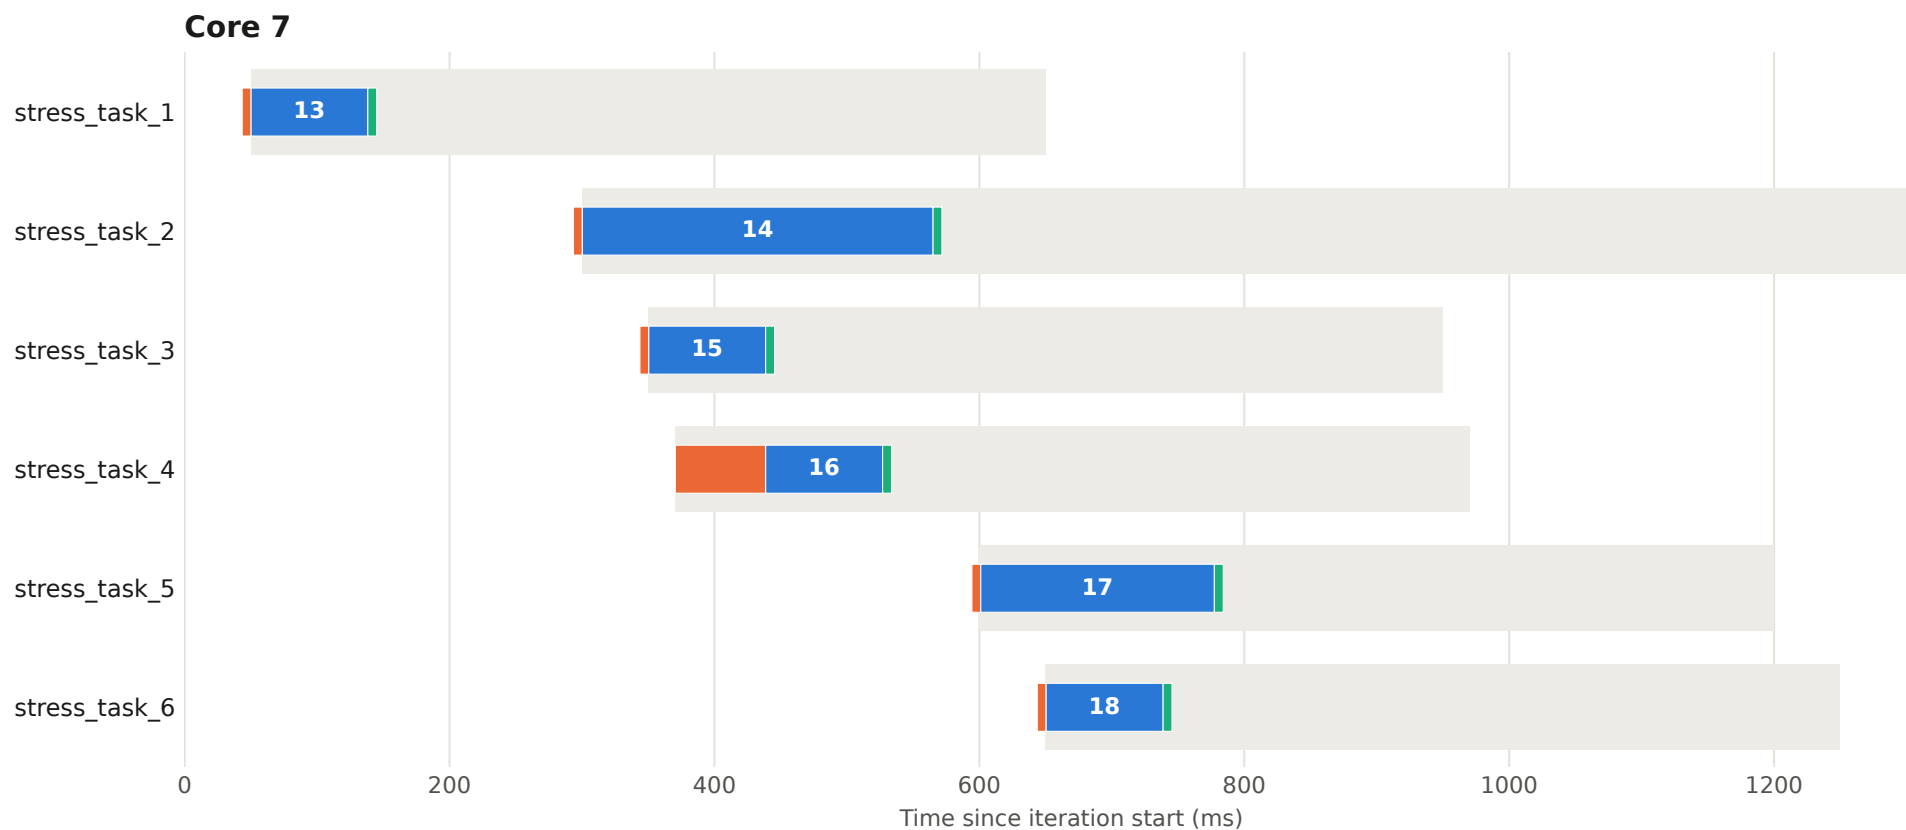


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 61 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

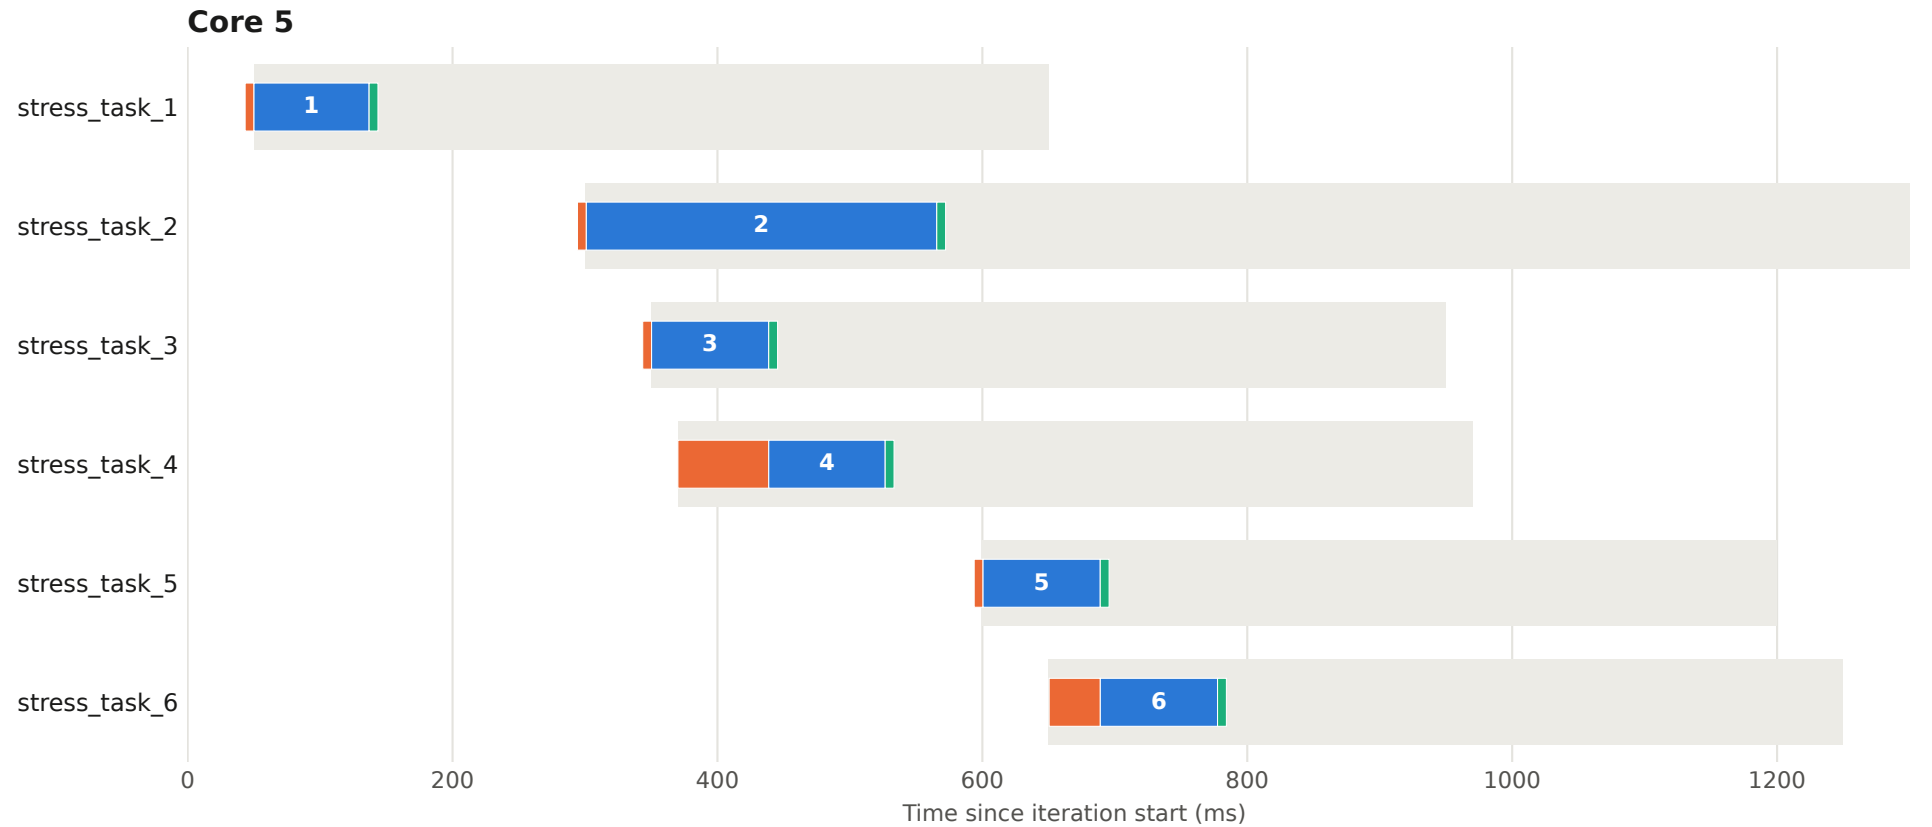


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 61 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

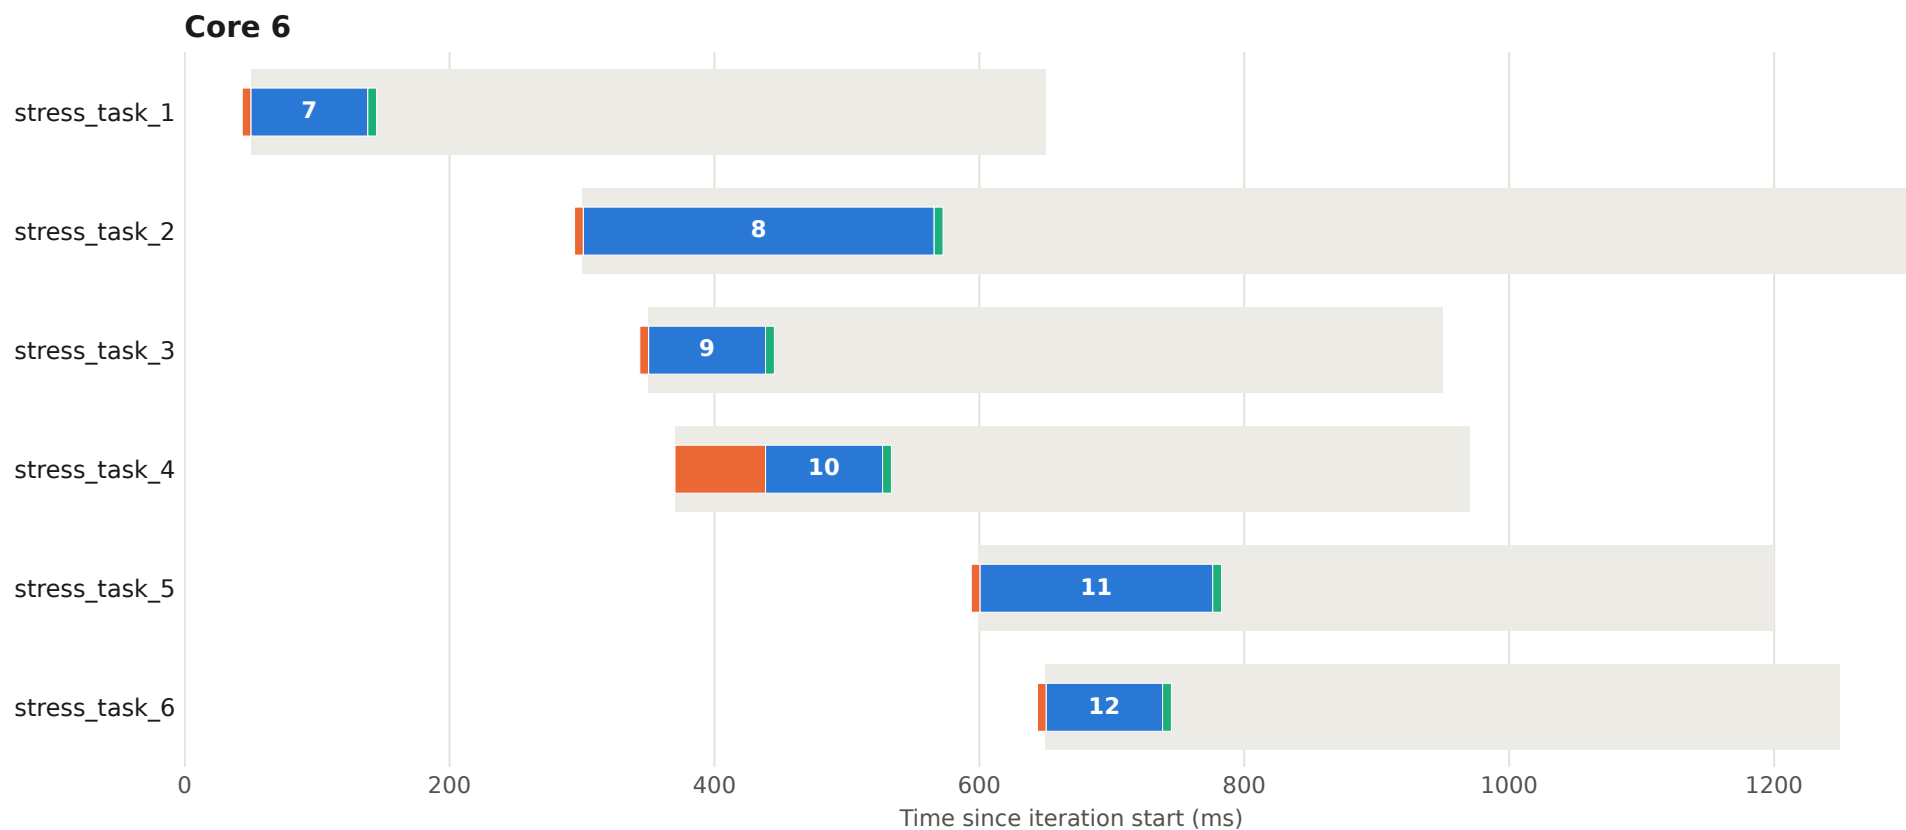


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 61 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

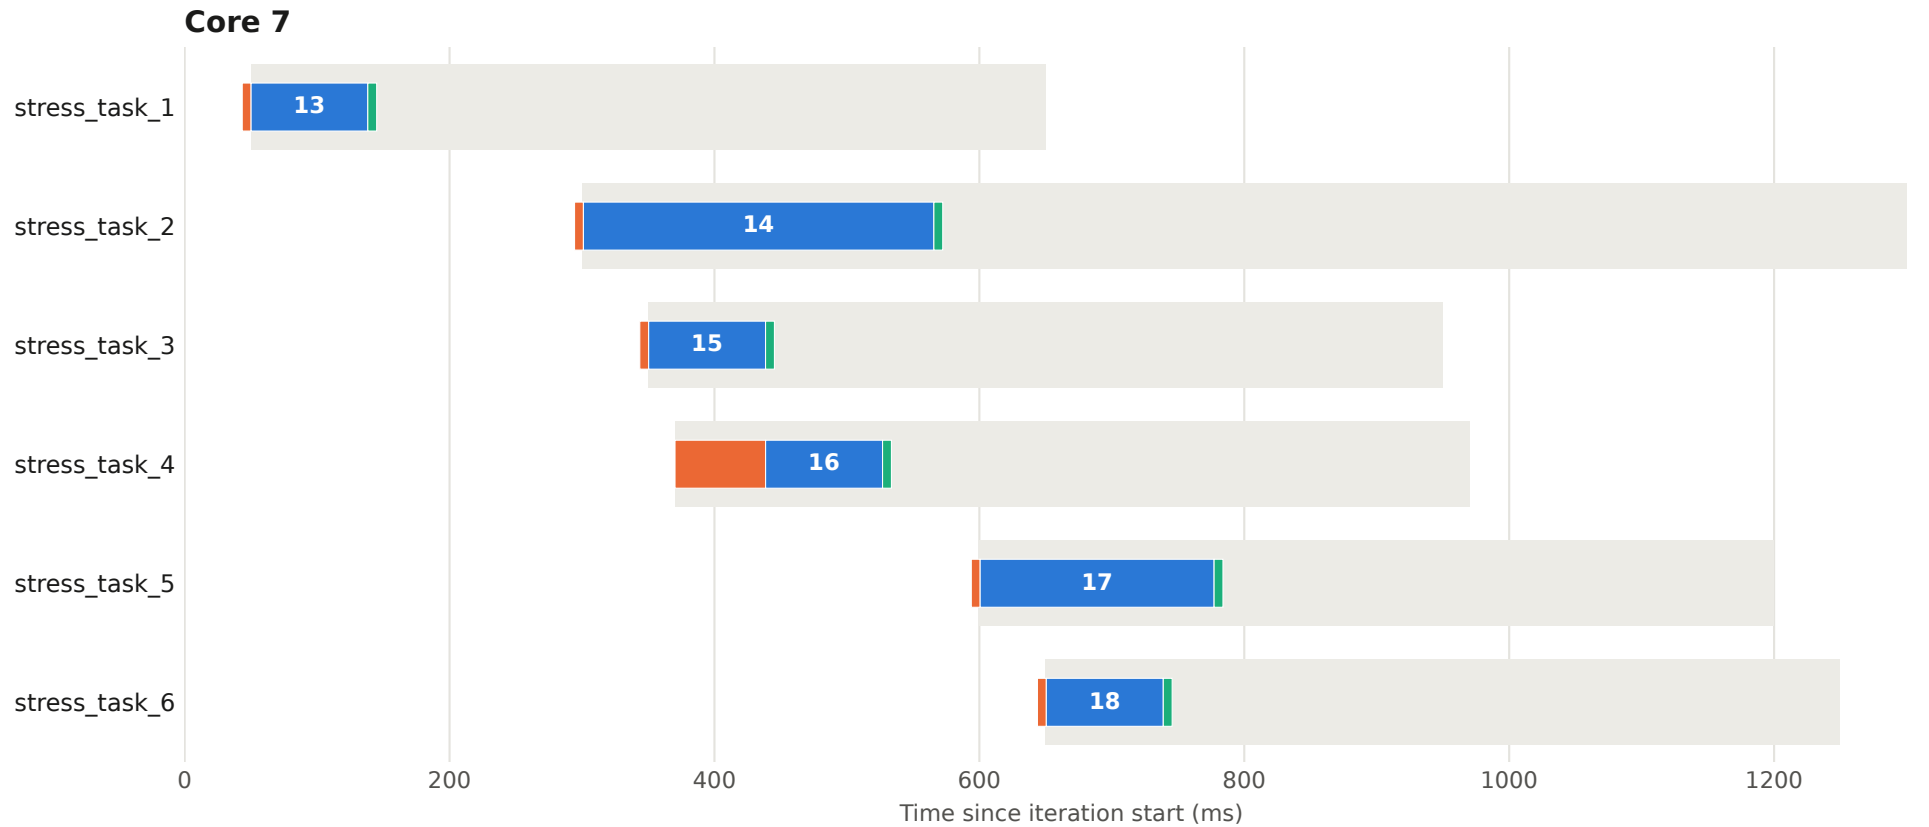


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 62 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

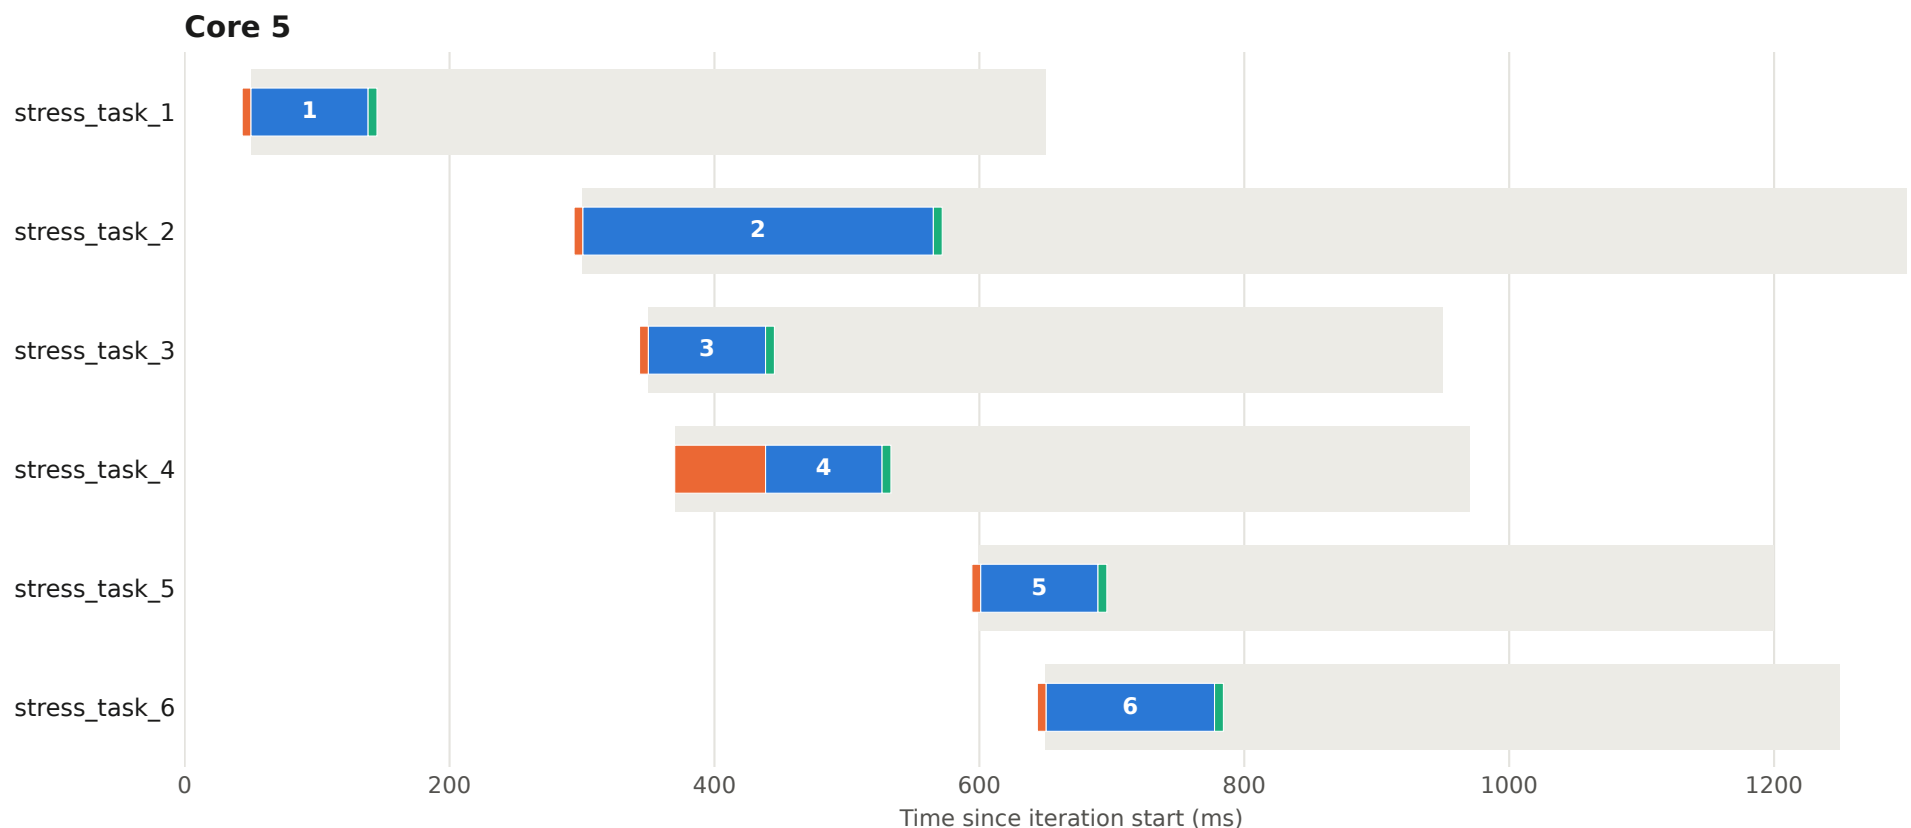


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 62 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

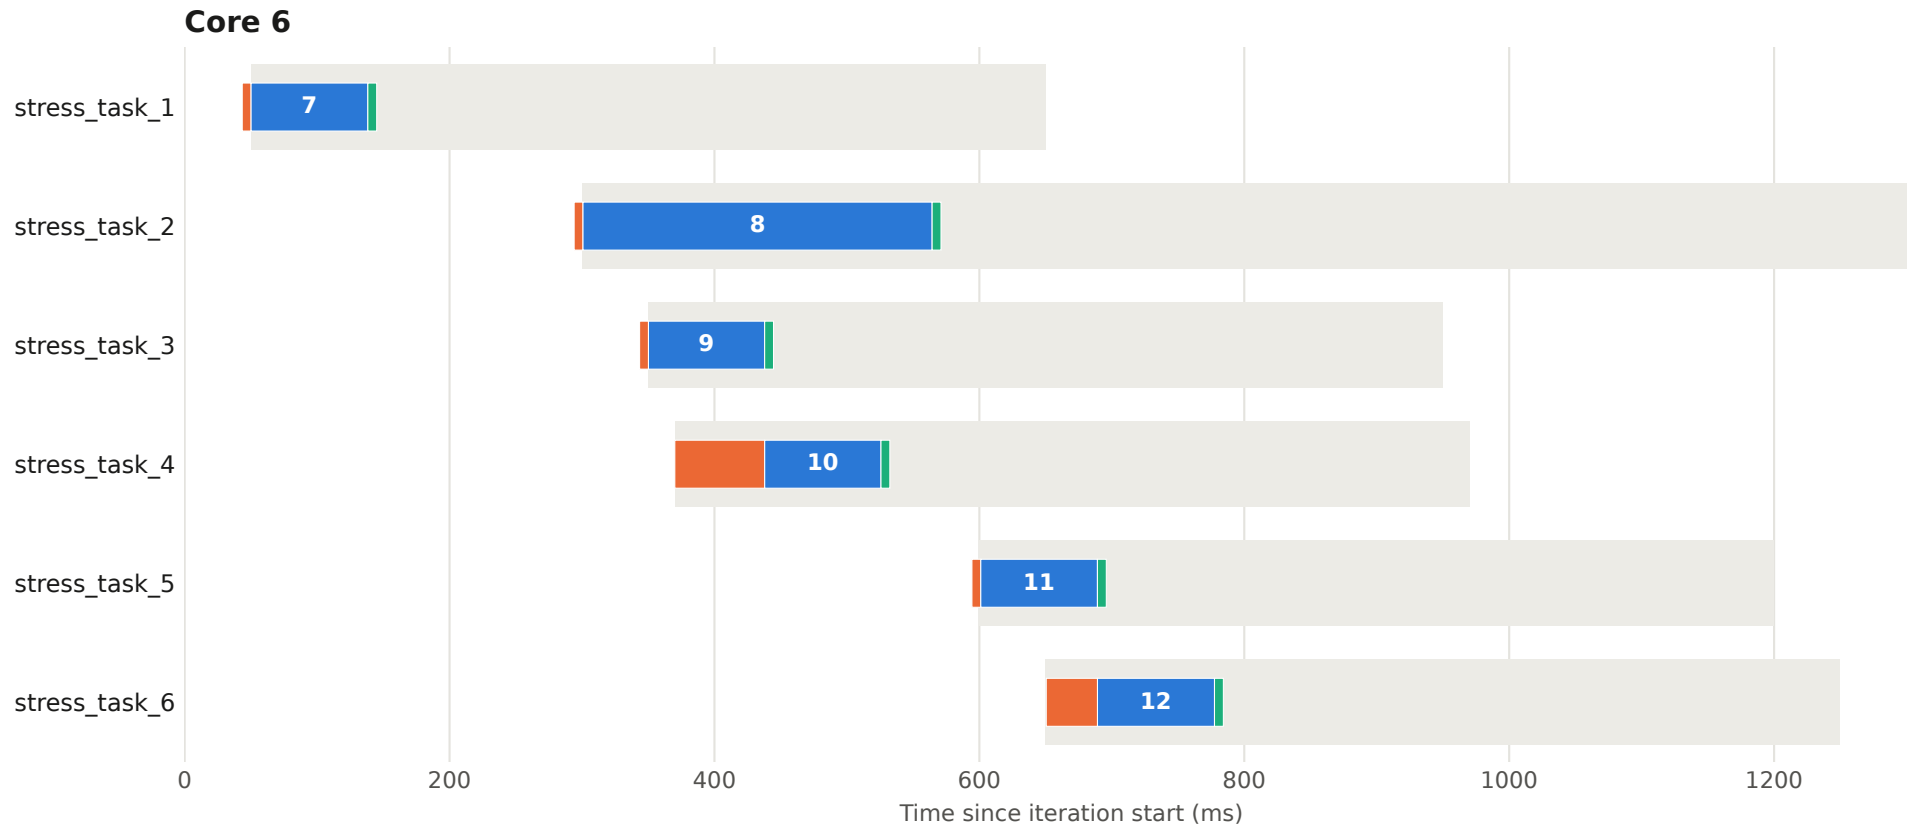


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 62 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

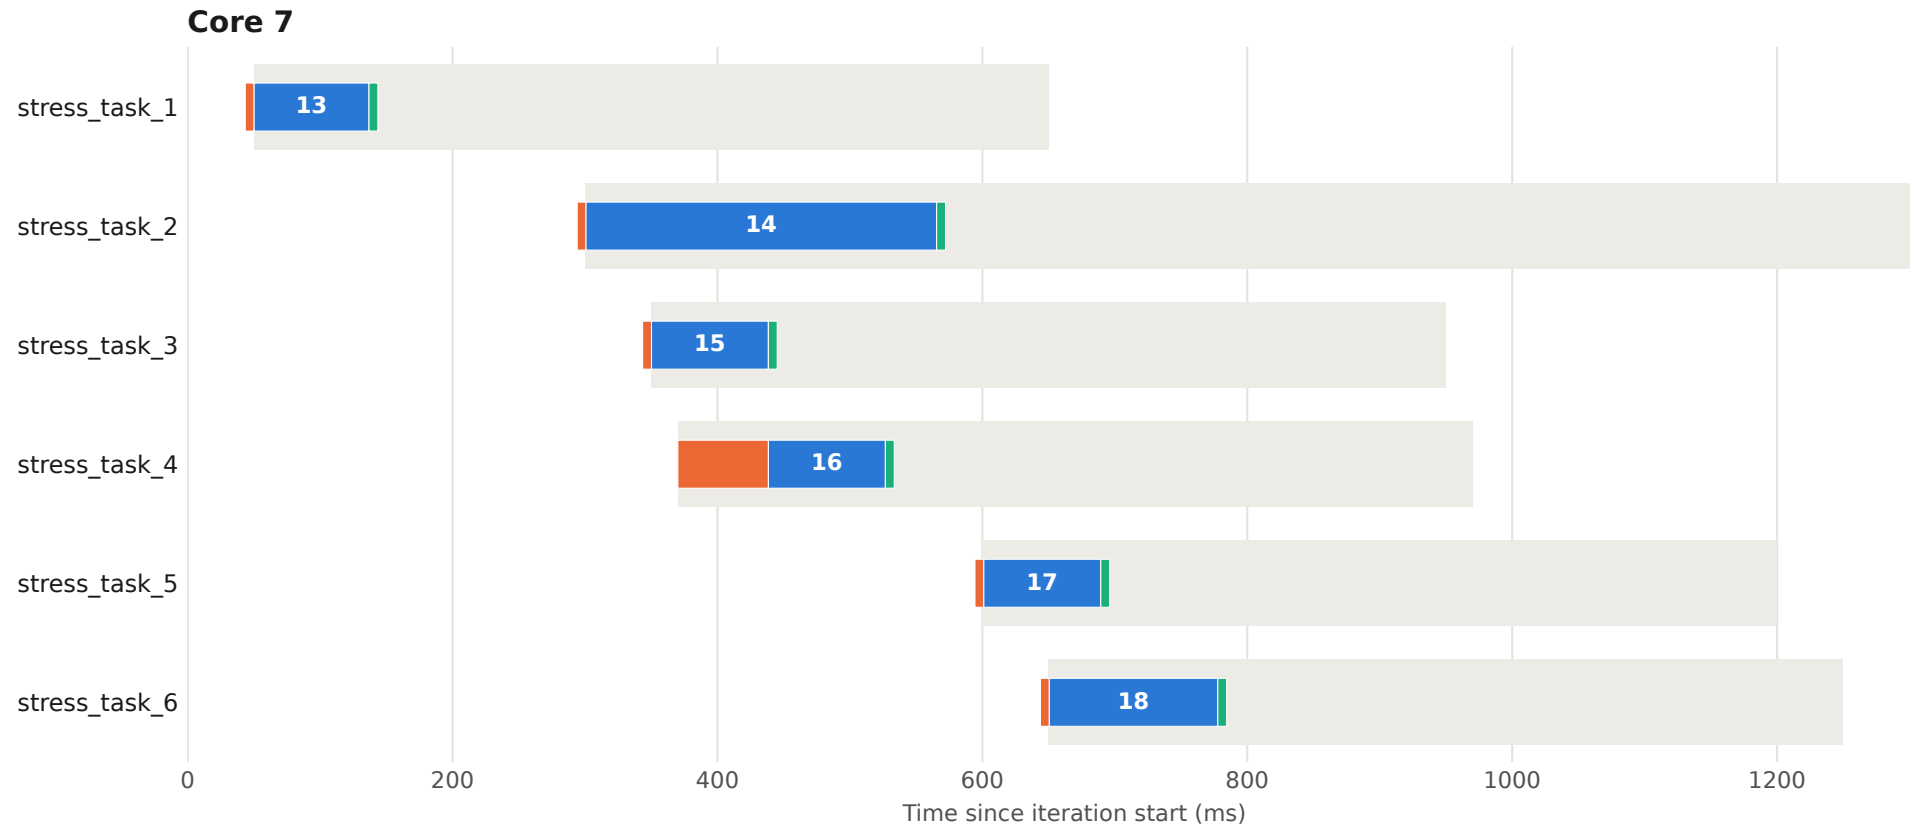


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 63 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

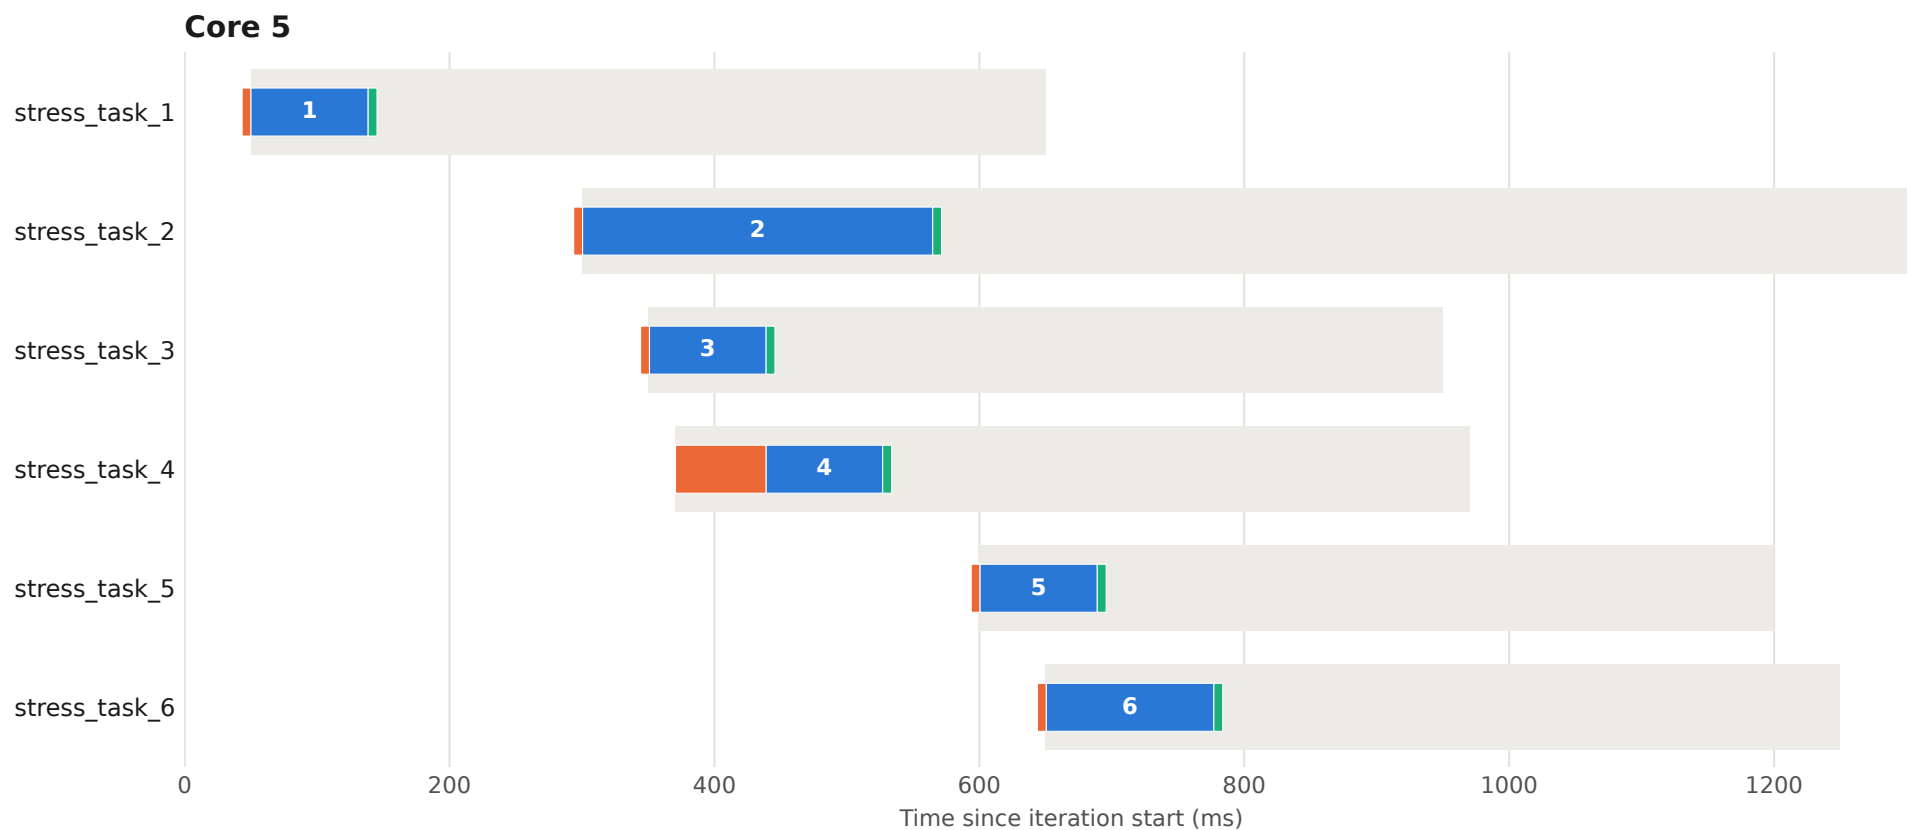


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 63 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

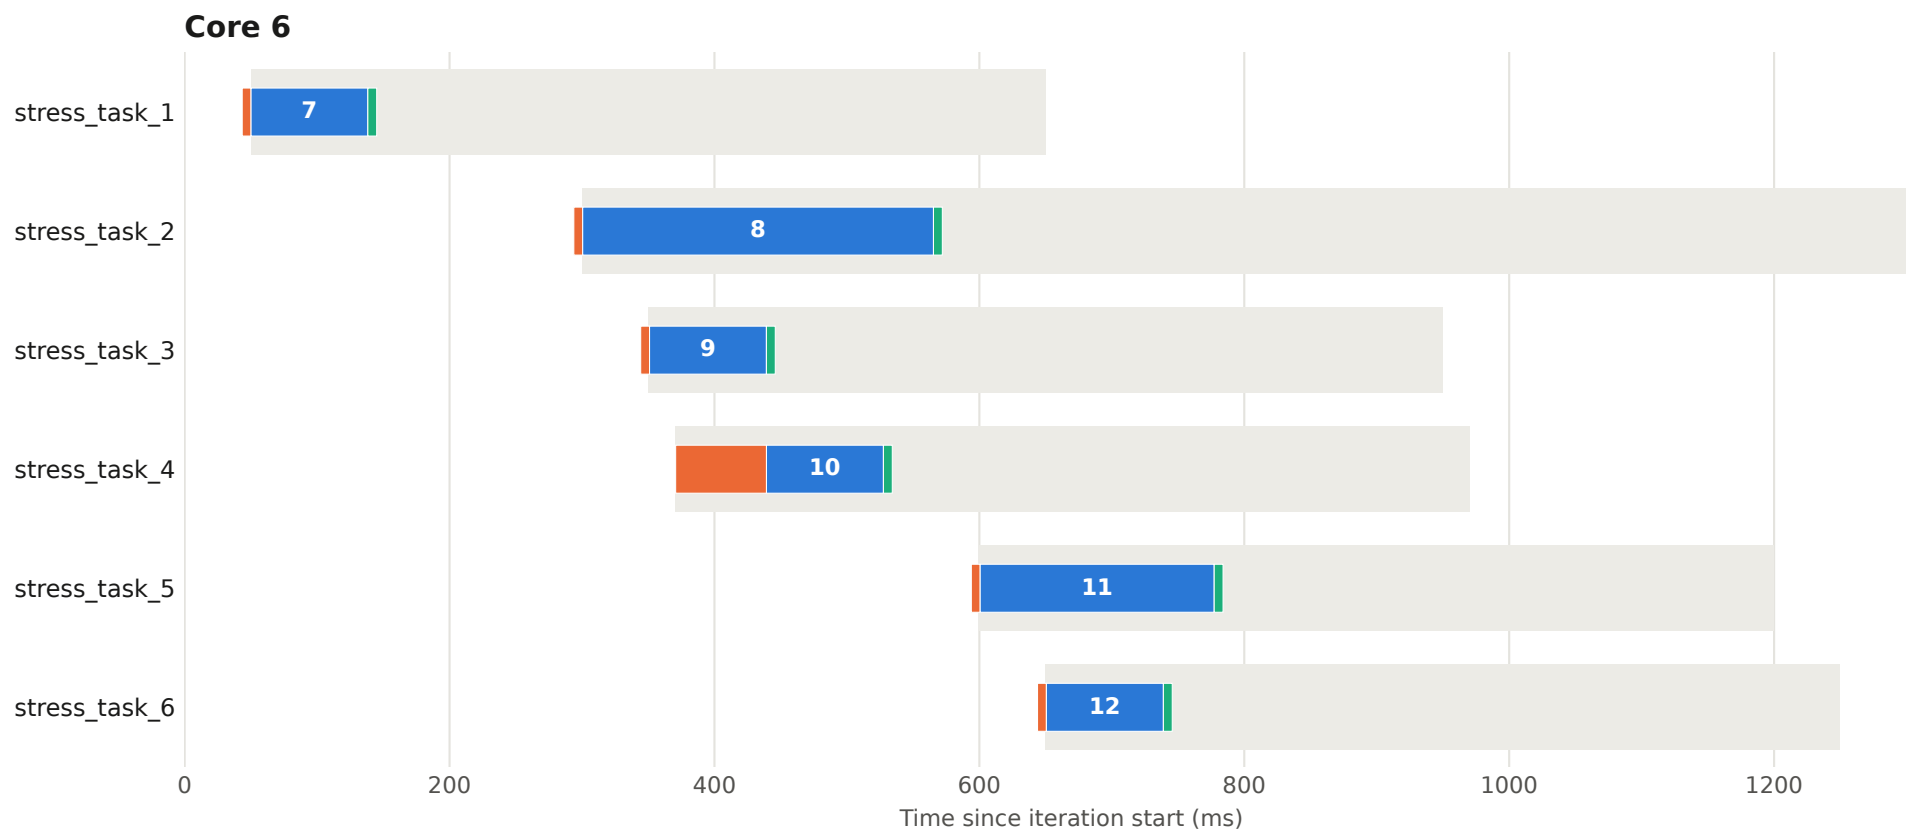


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 63 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

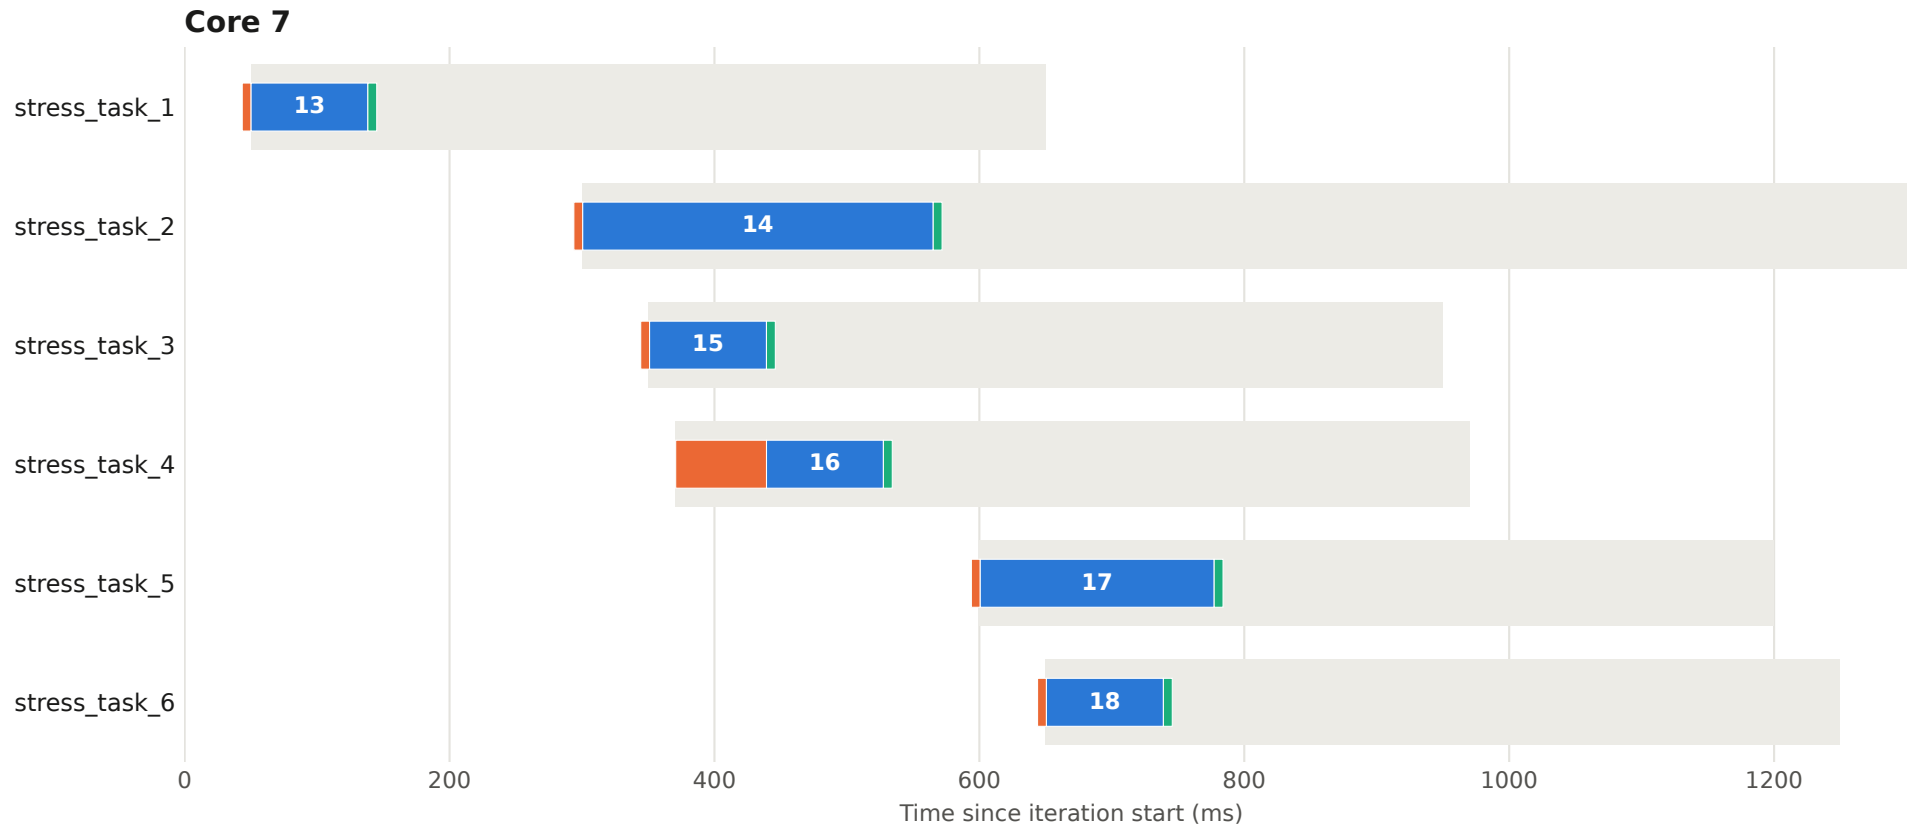


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 64 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

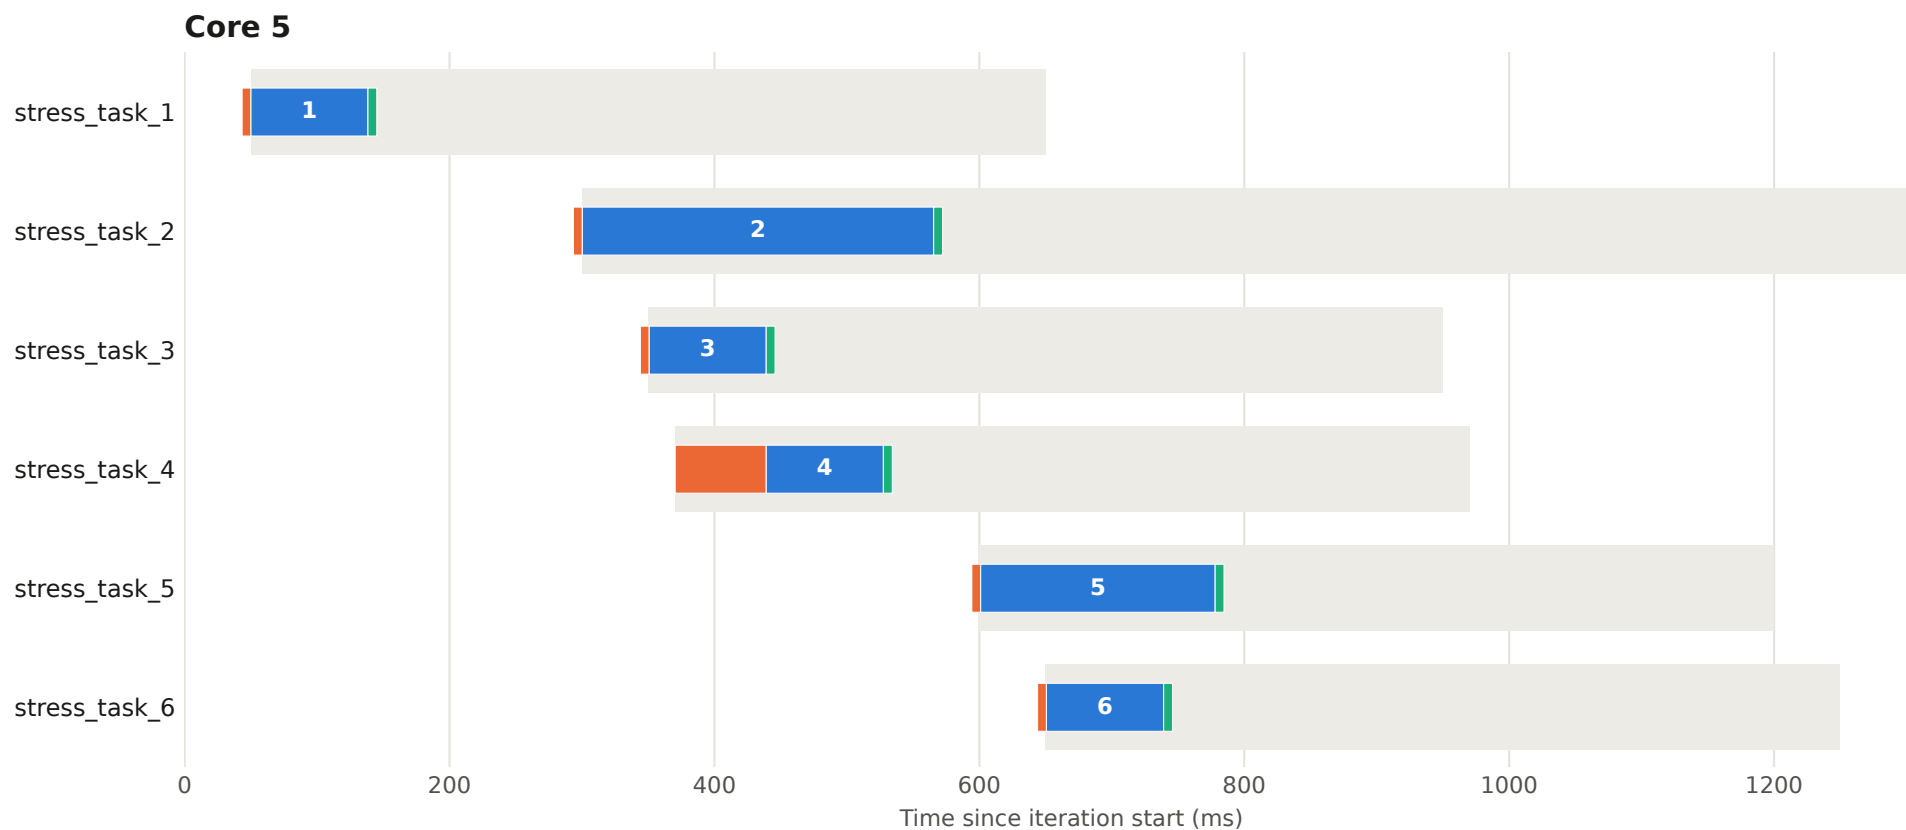


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 64 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

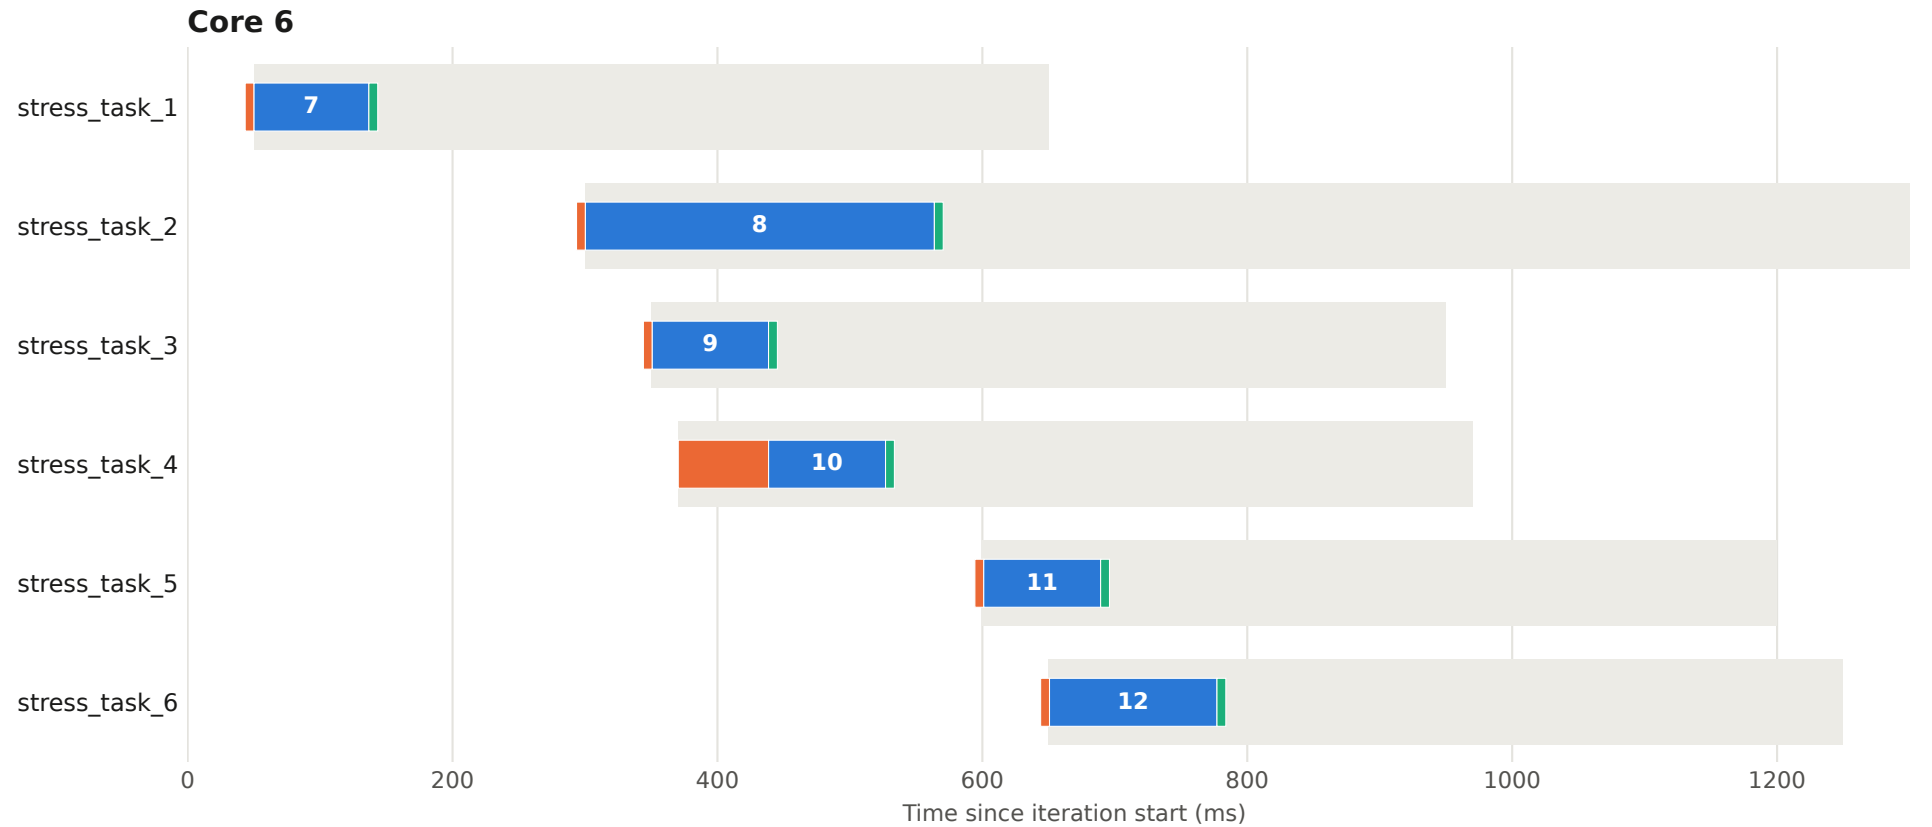


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 64 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

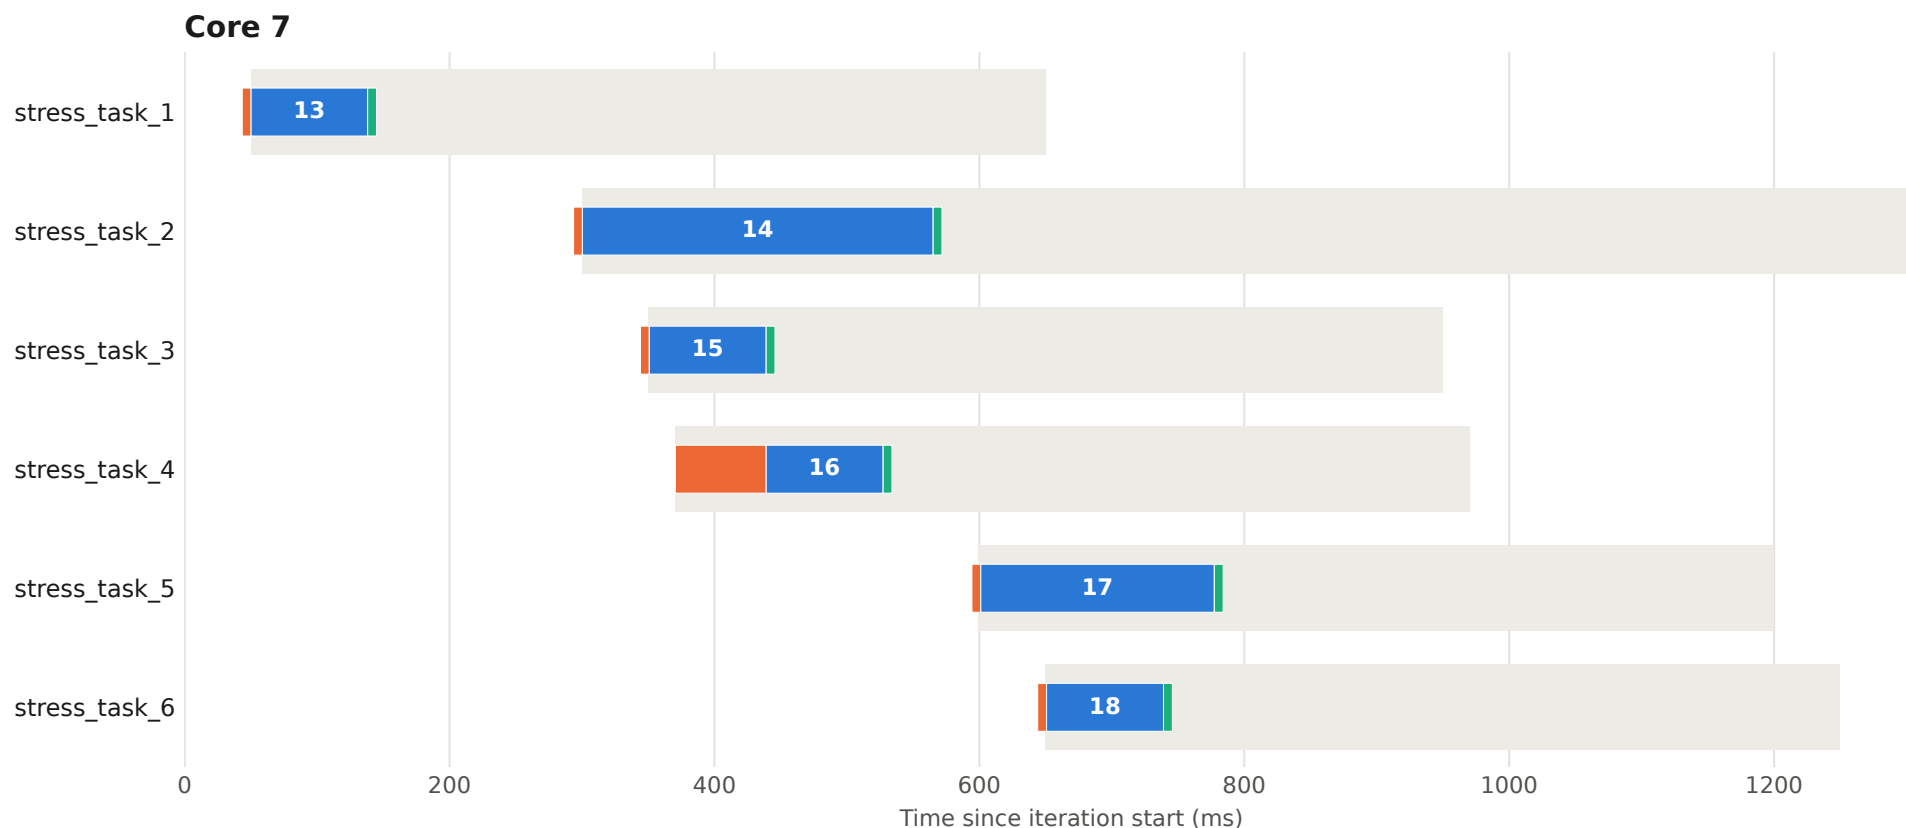


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 65 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

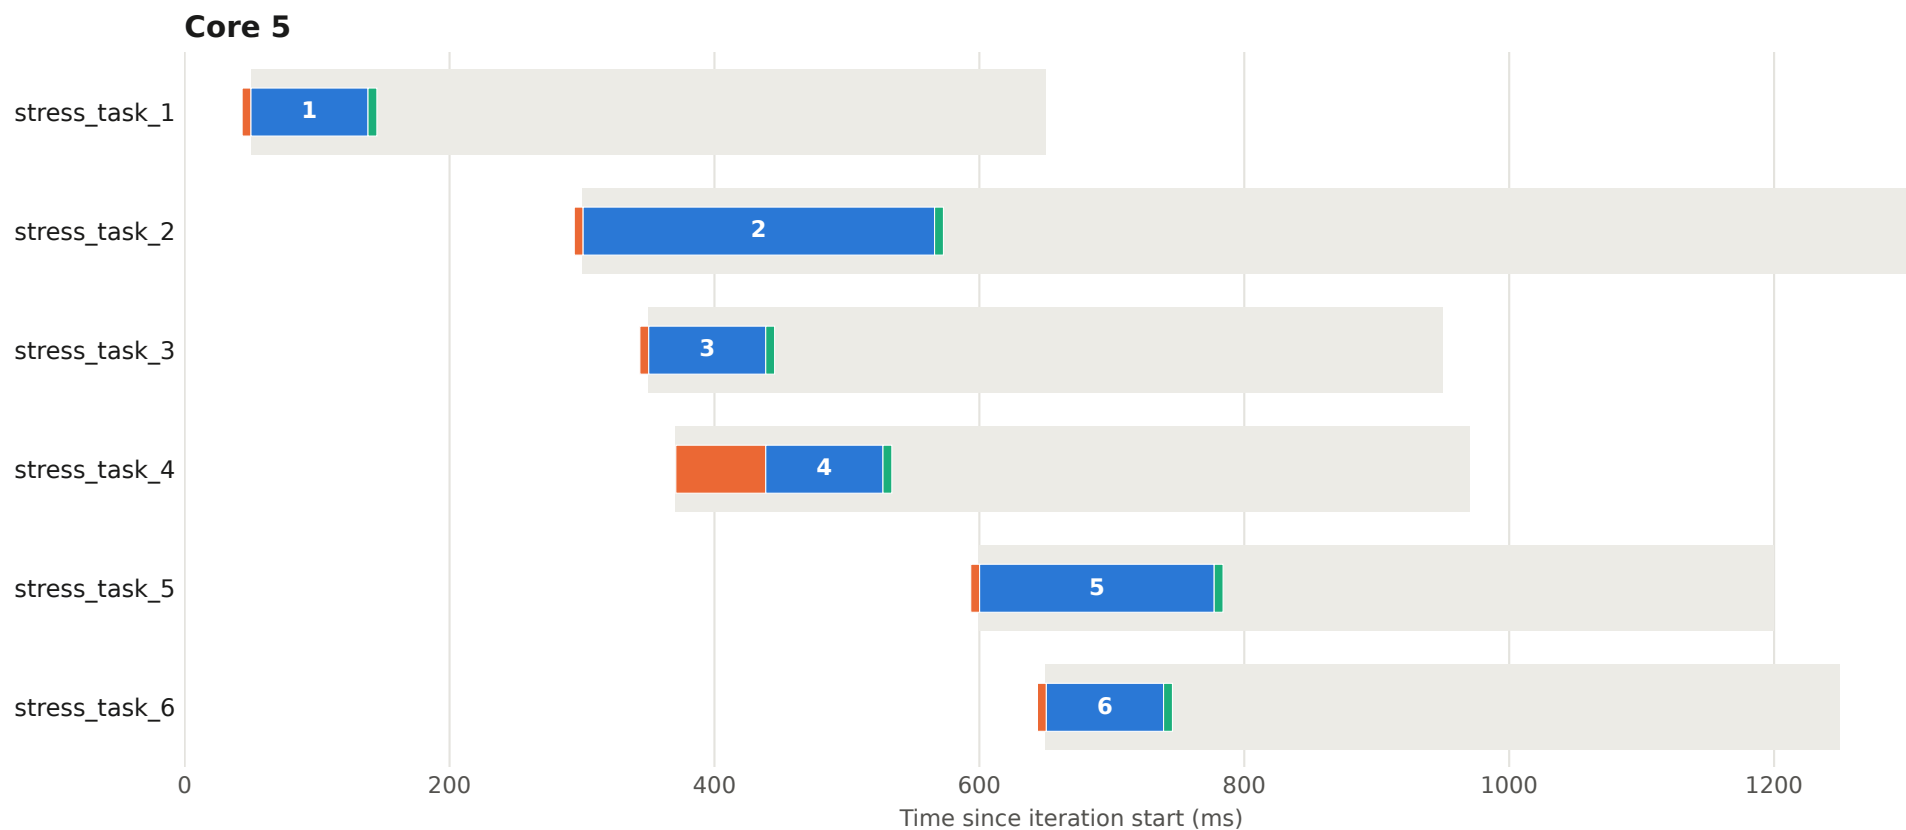


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 65 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

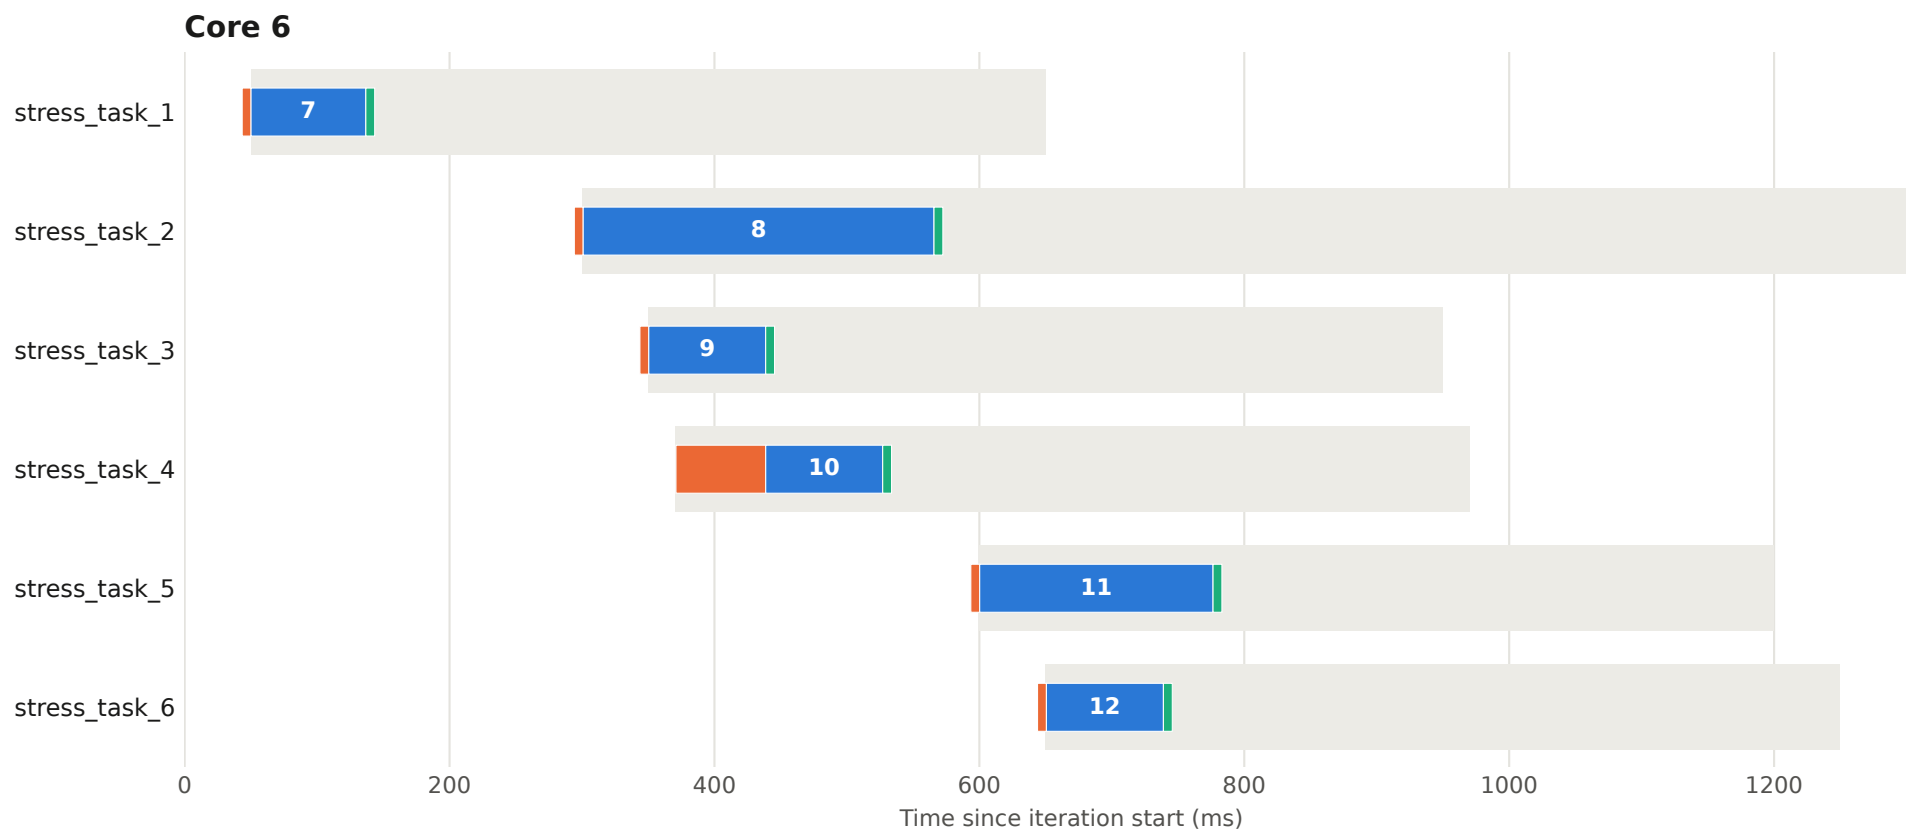


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 65 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

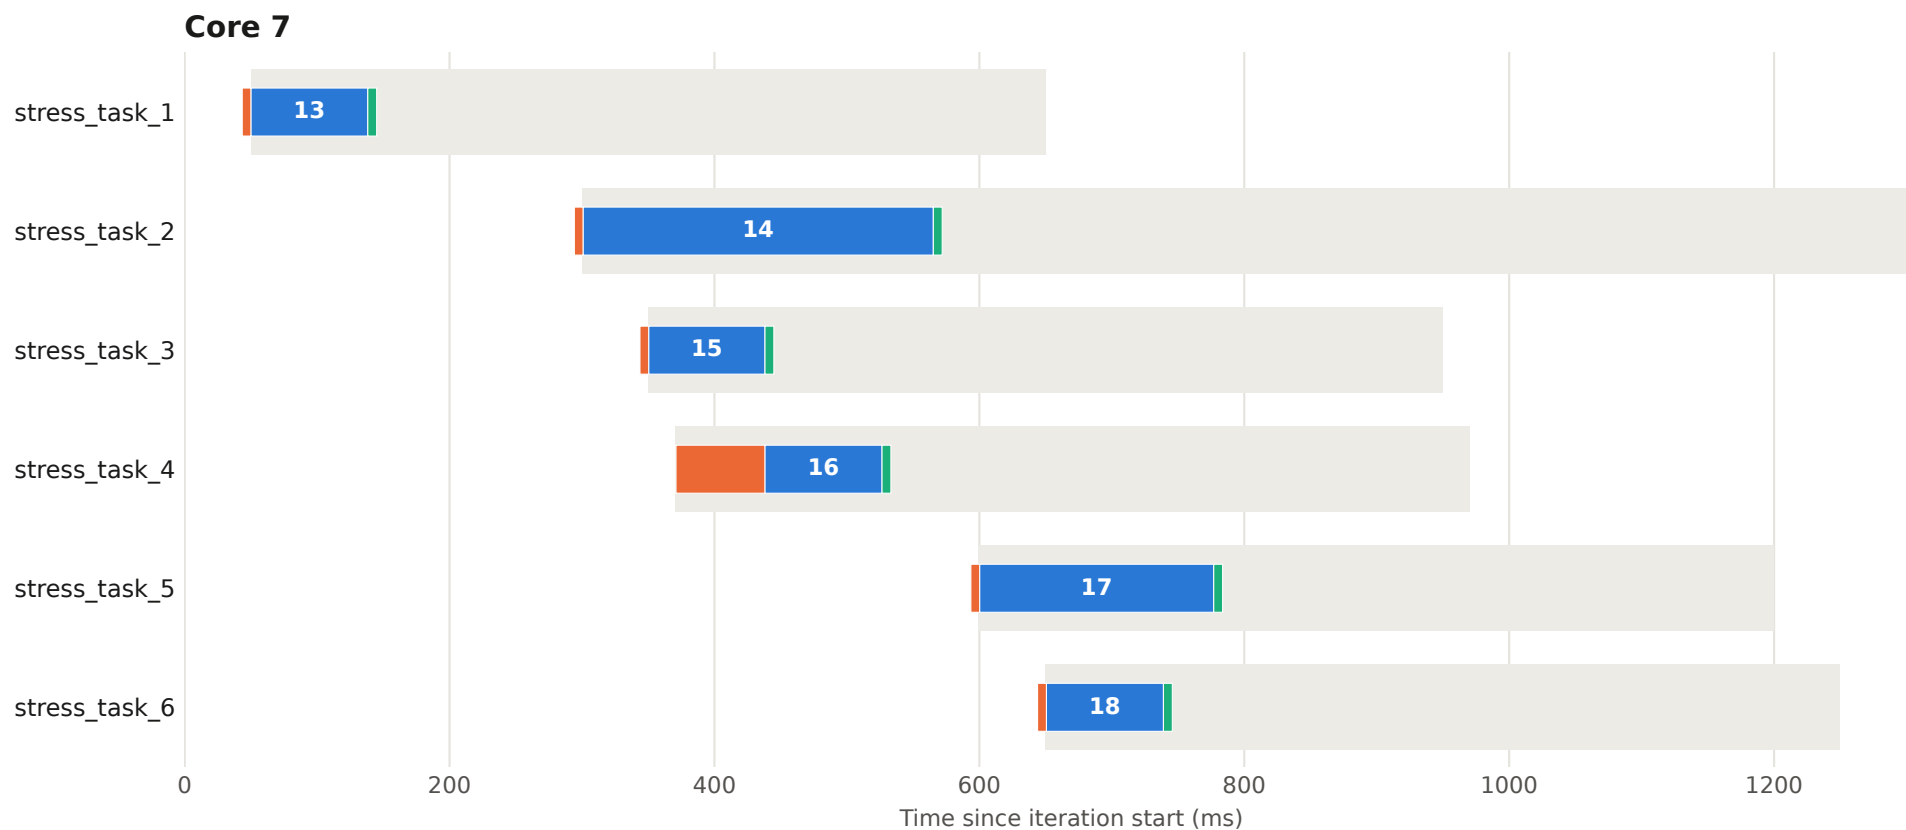


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 66 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

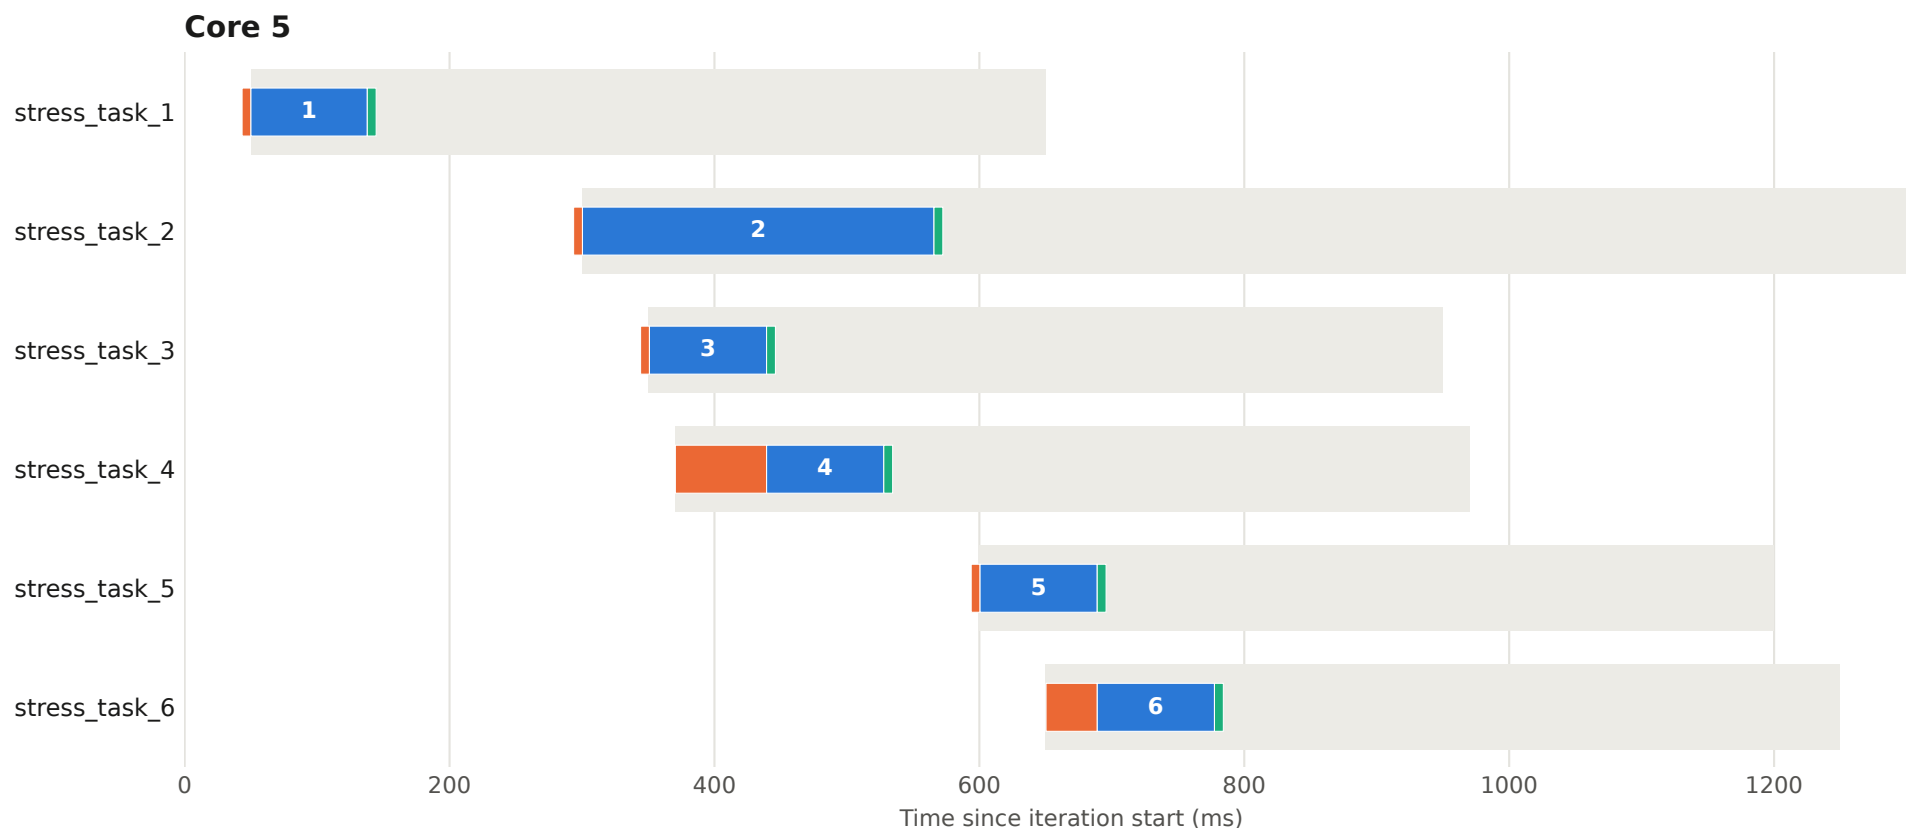


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 66 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

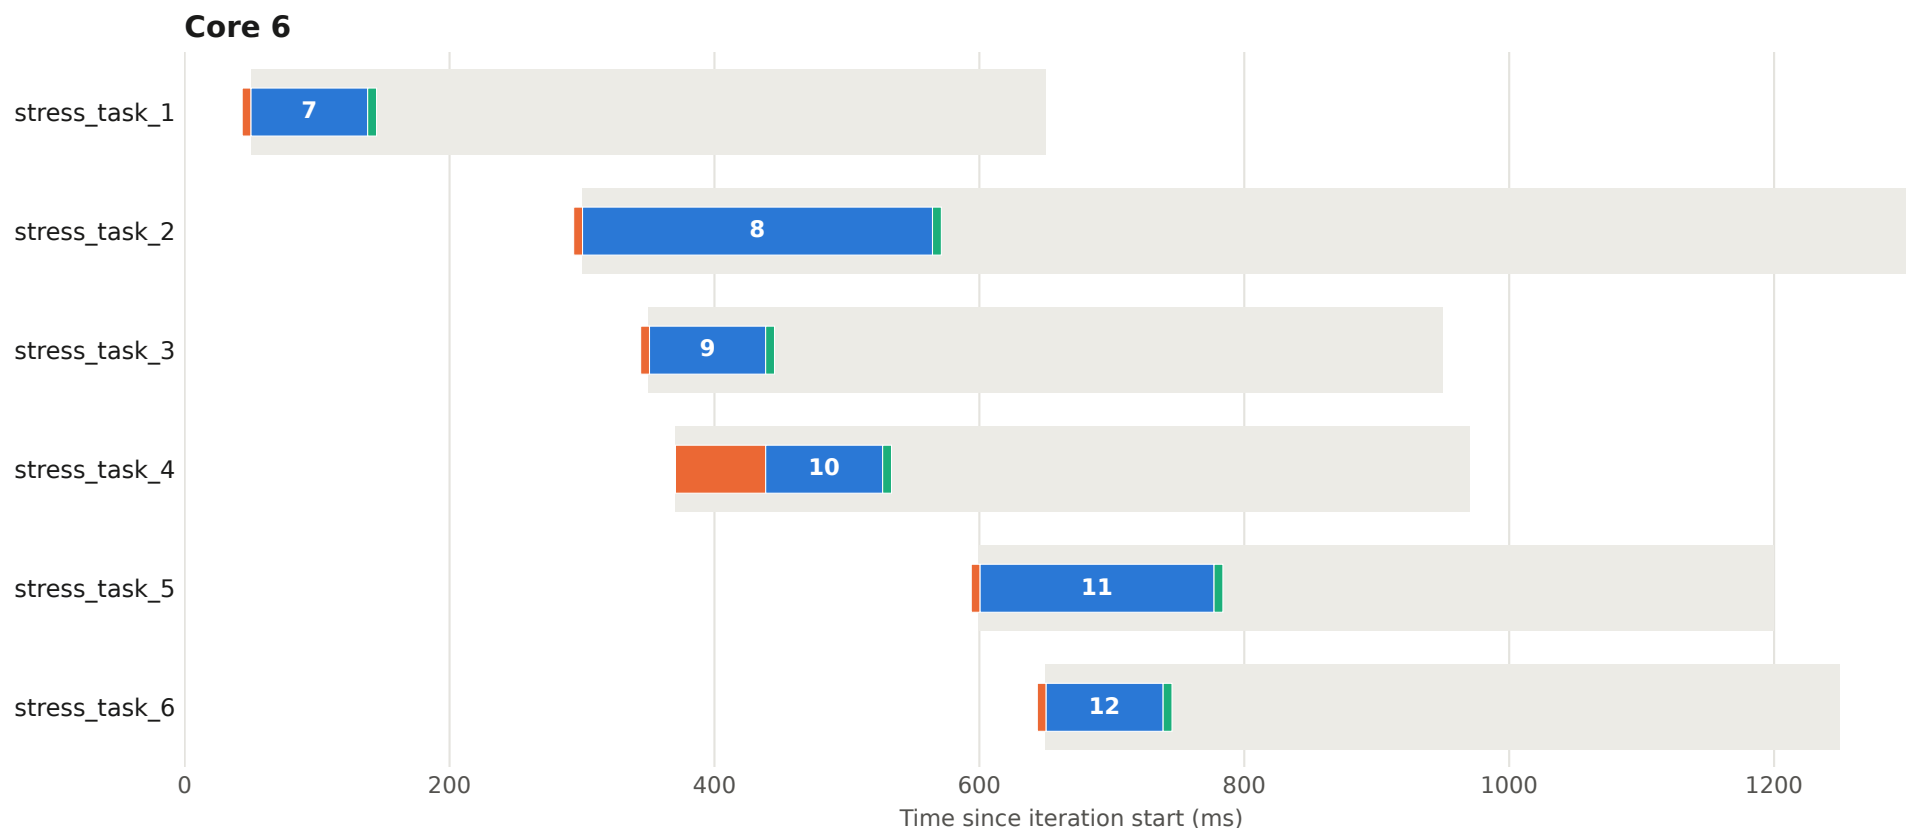


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 66 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

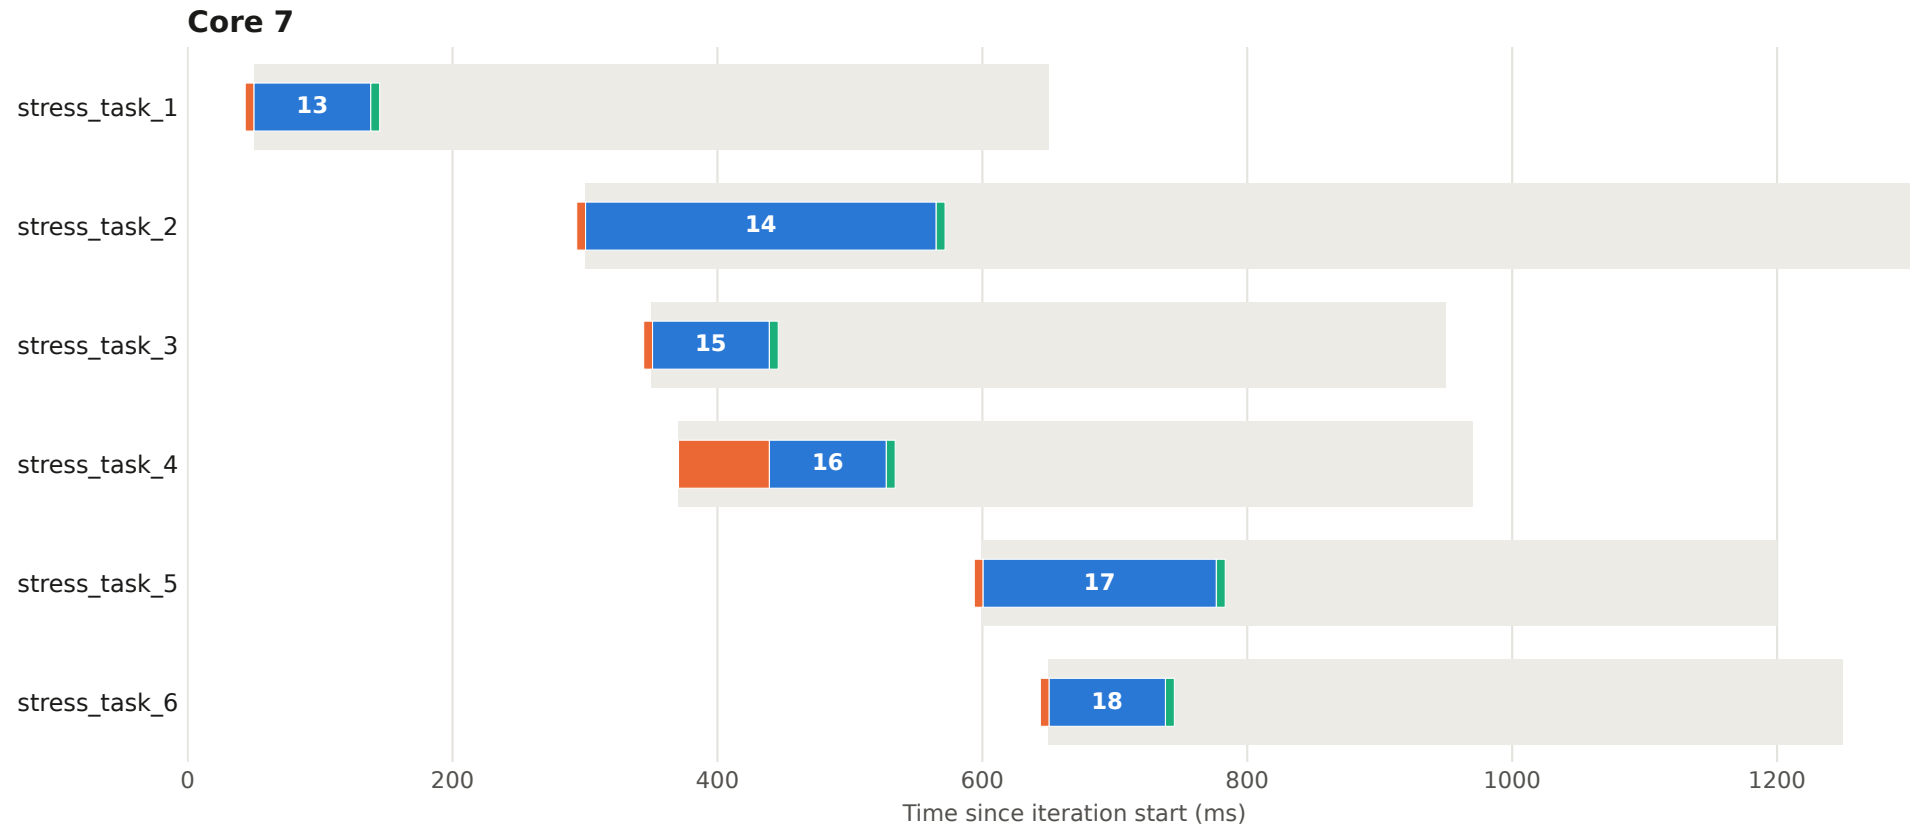


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 67 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

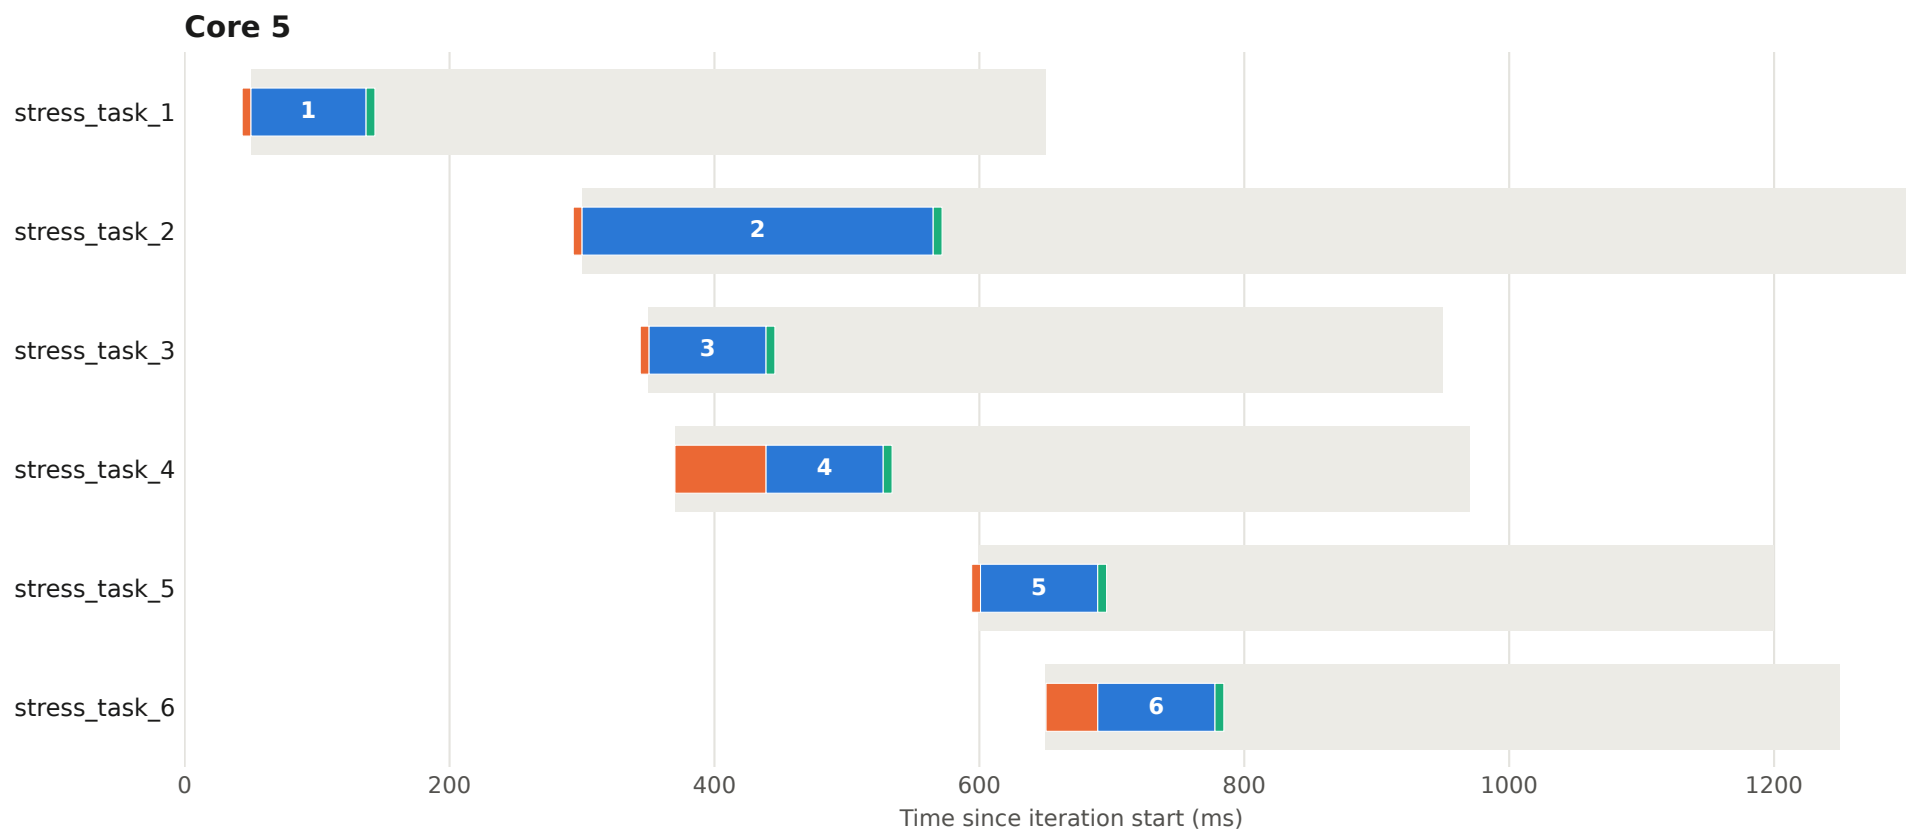


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 67 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

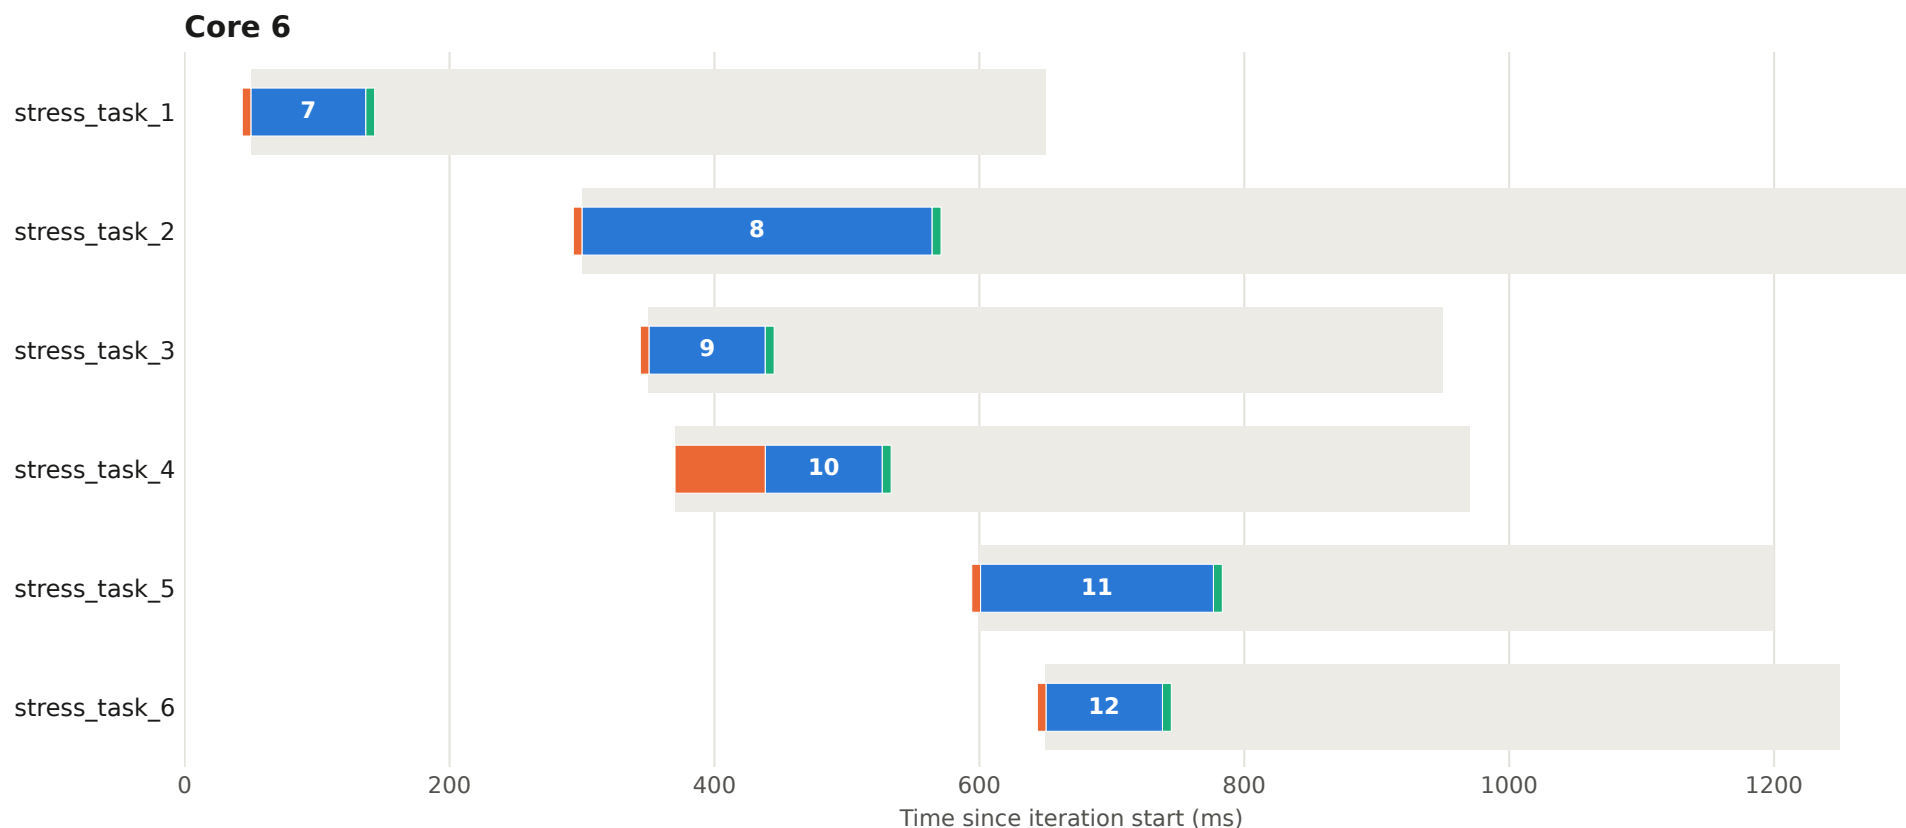


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 67 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

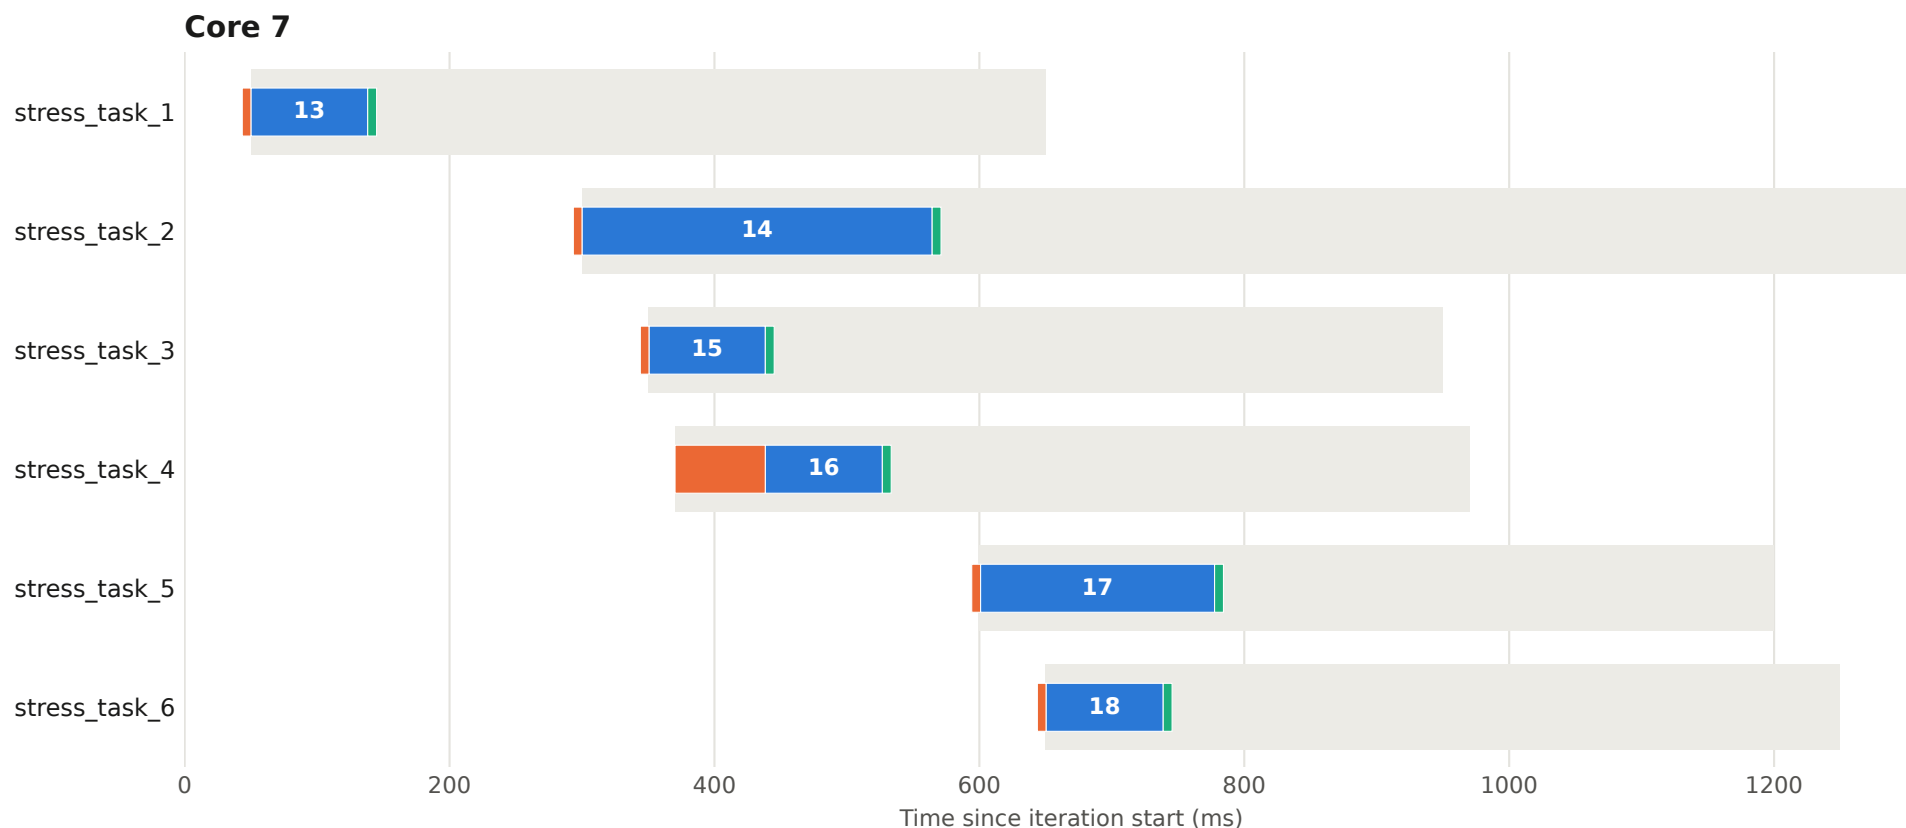


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 68 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

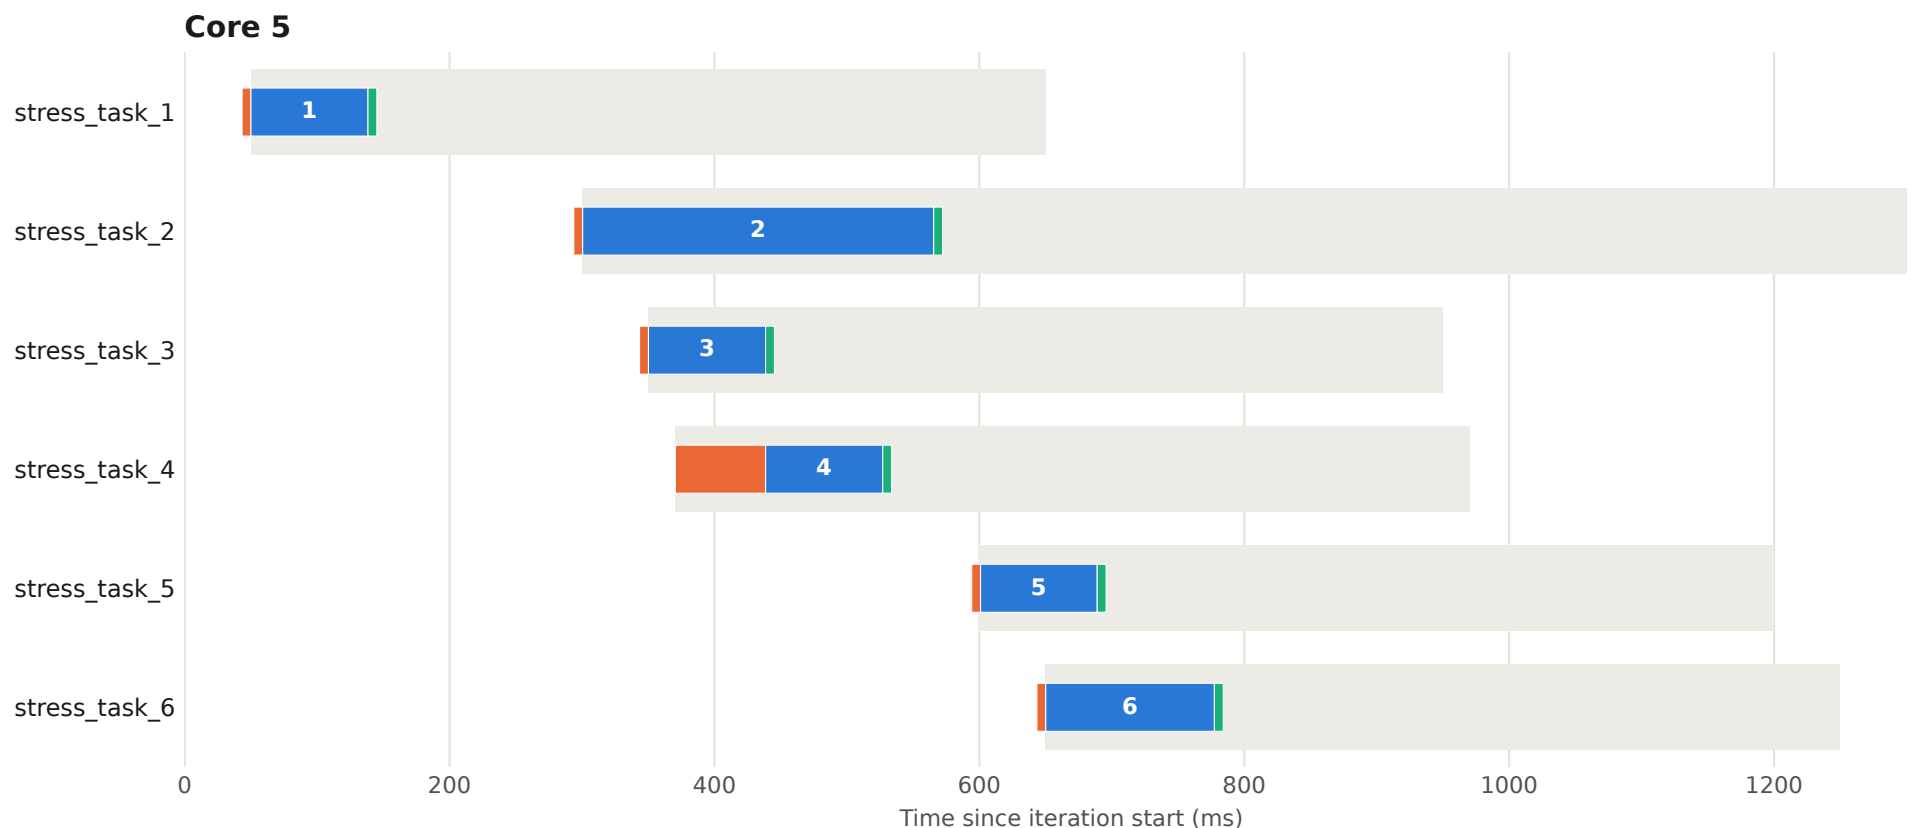


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 68 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

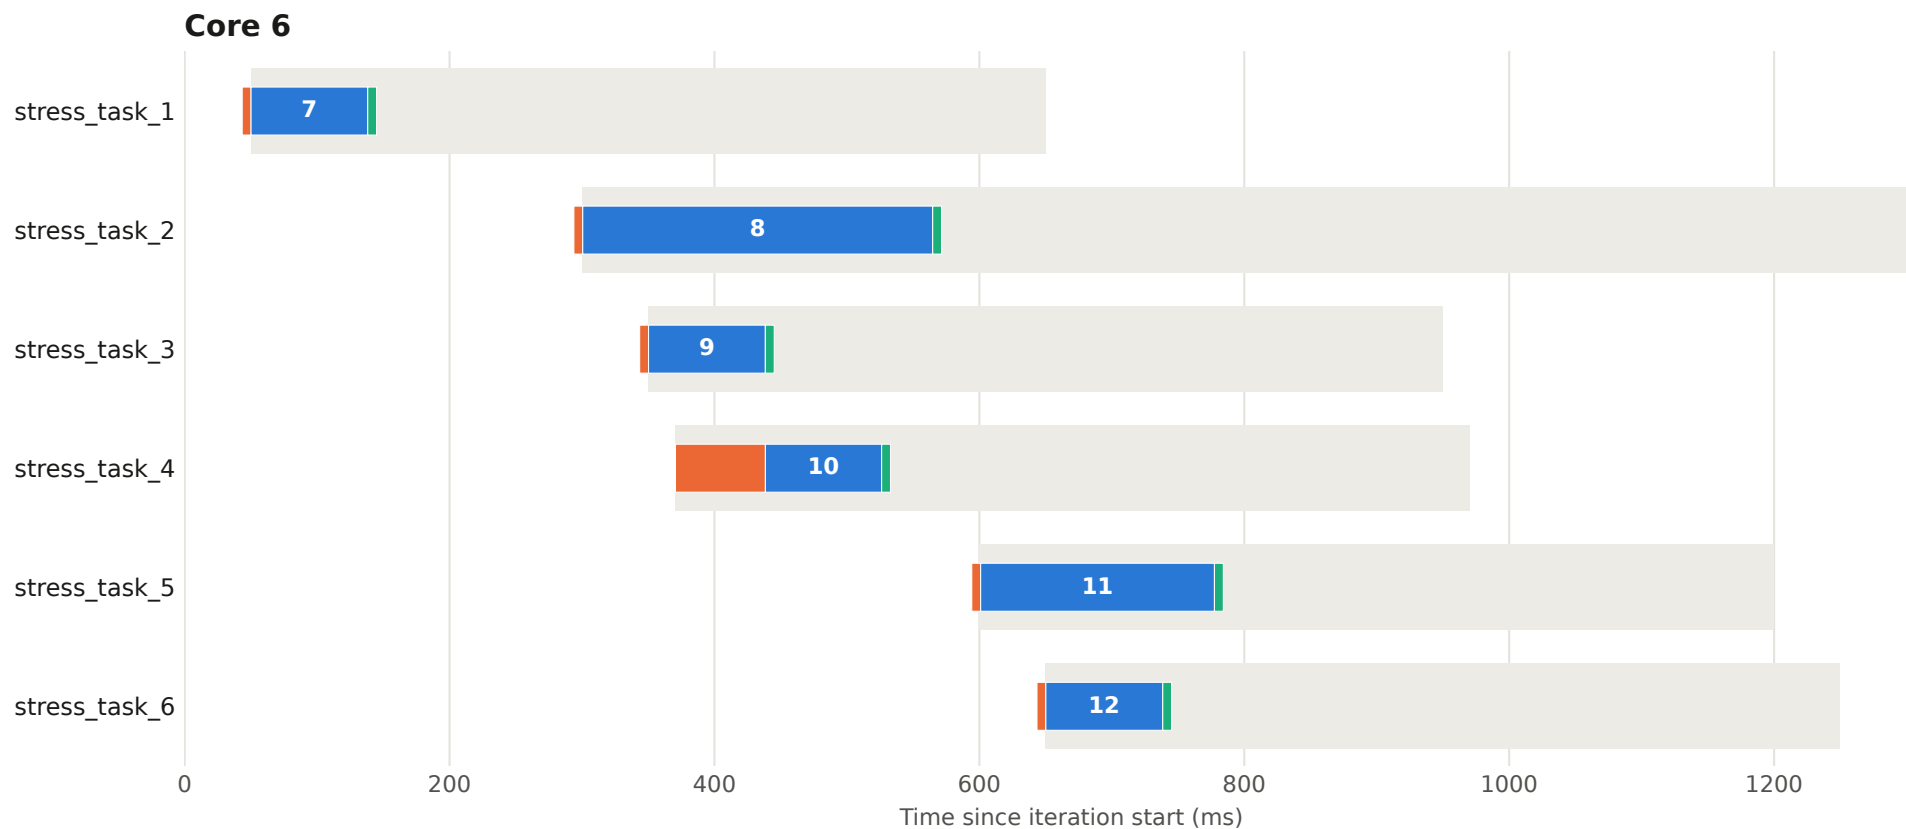


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 68 - core 7

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

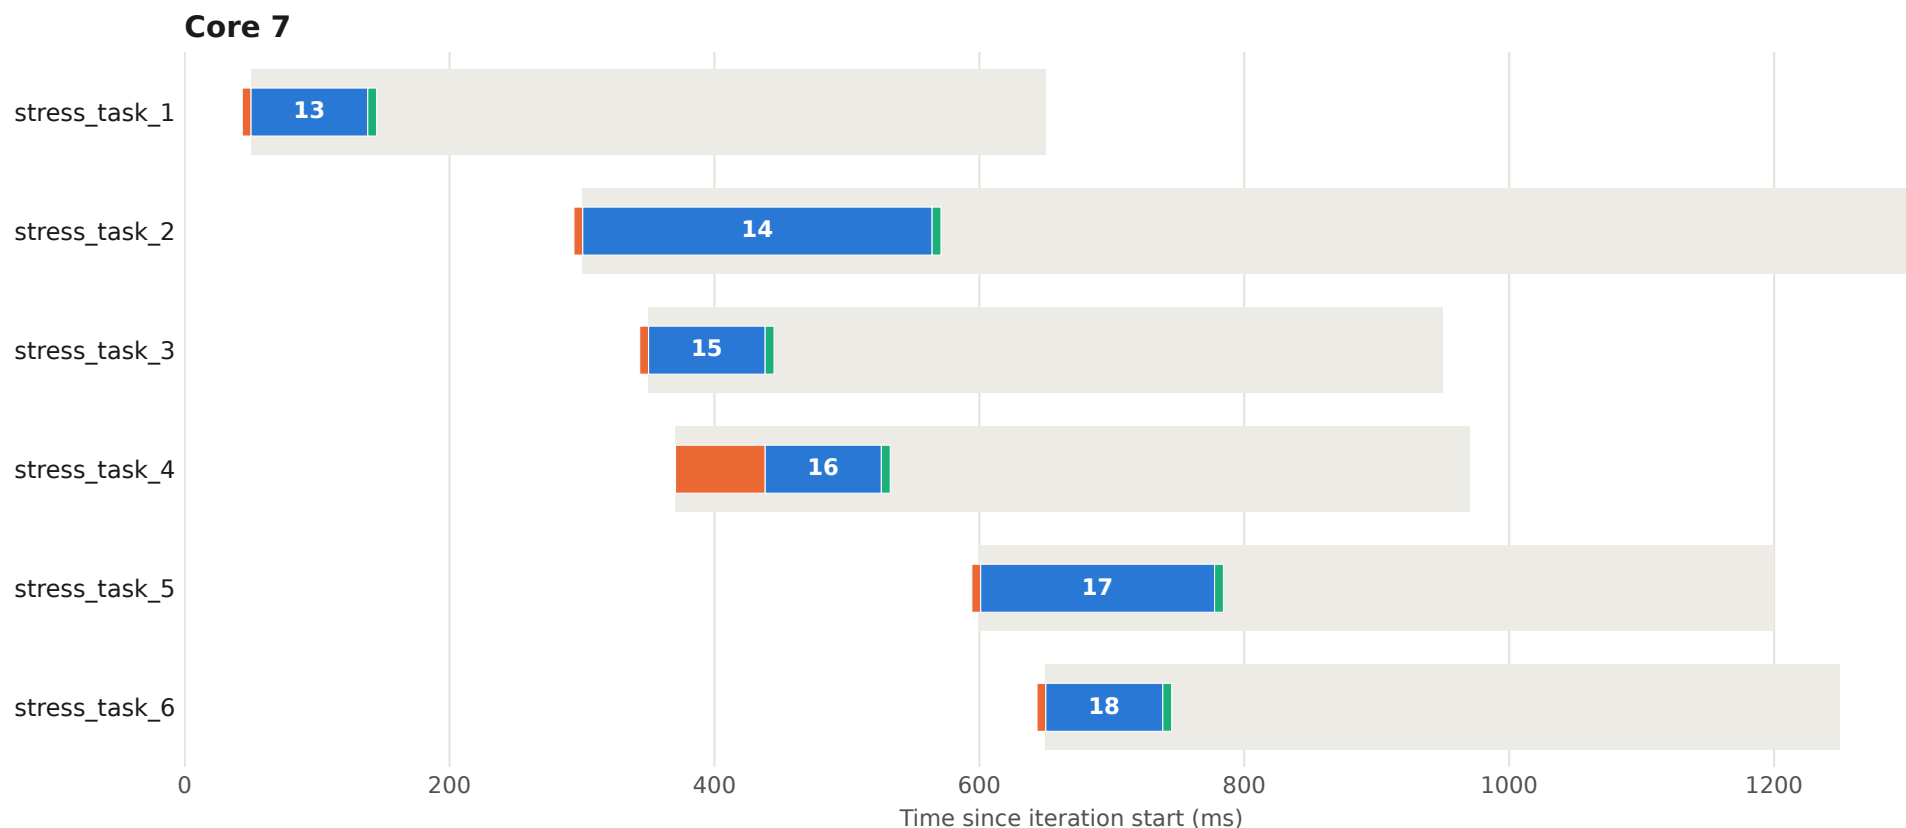

Execution plan - iteration 69 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

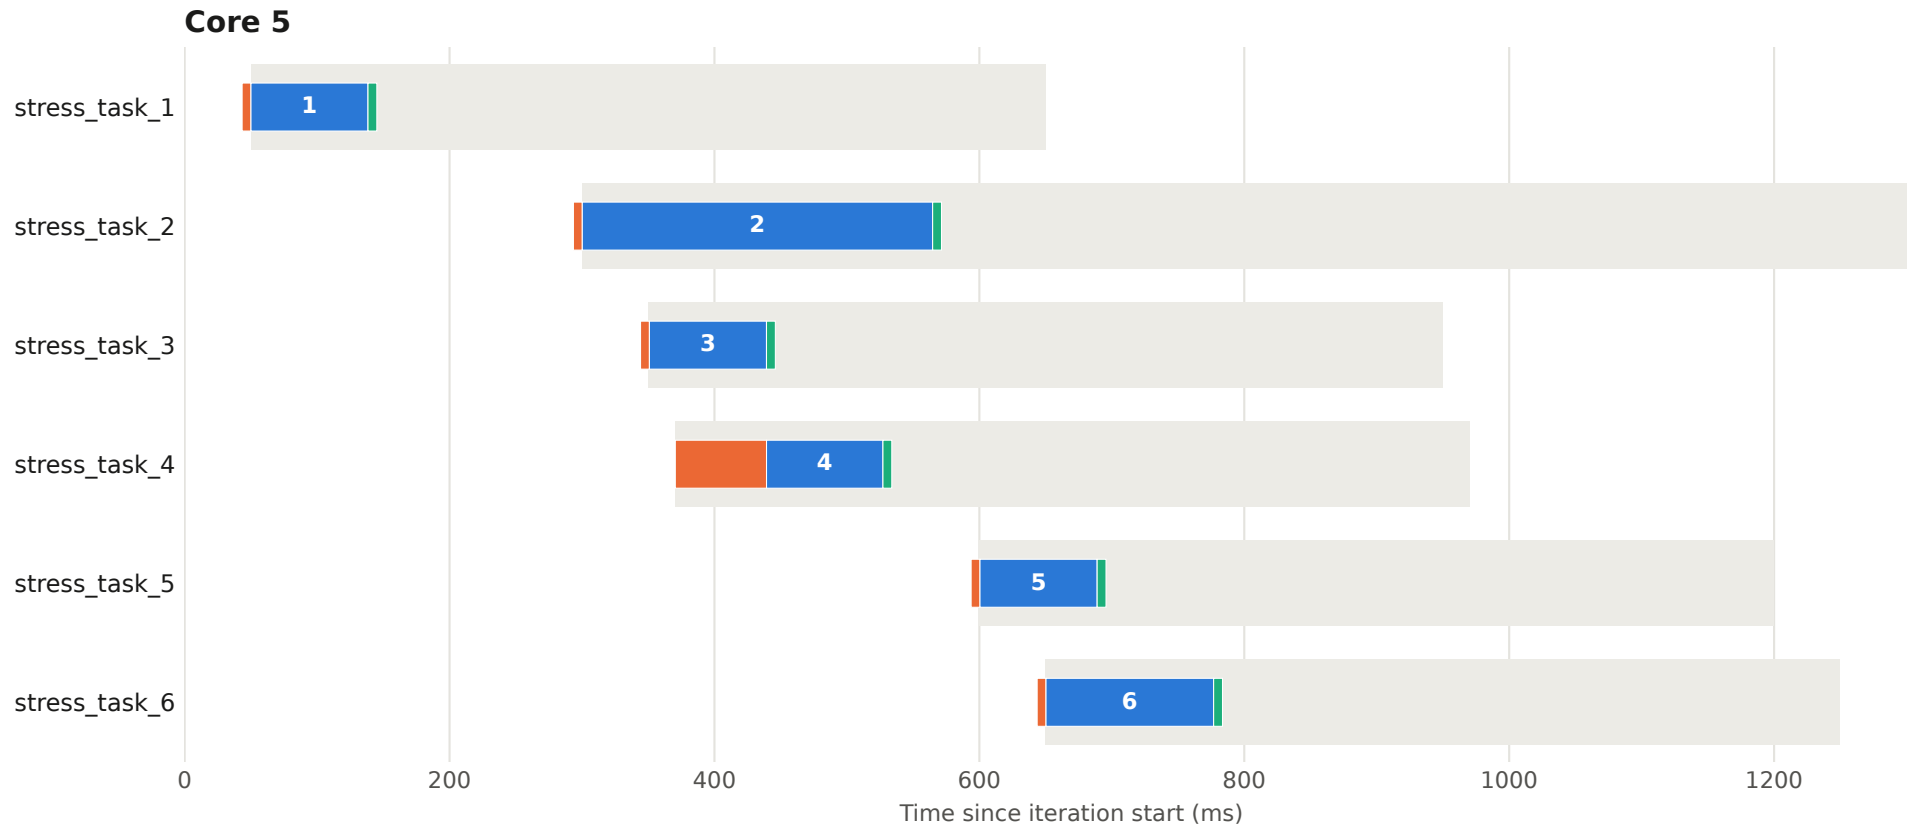


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 69 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

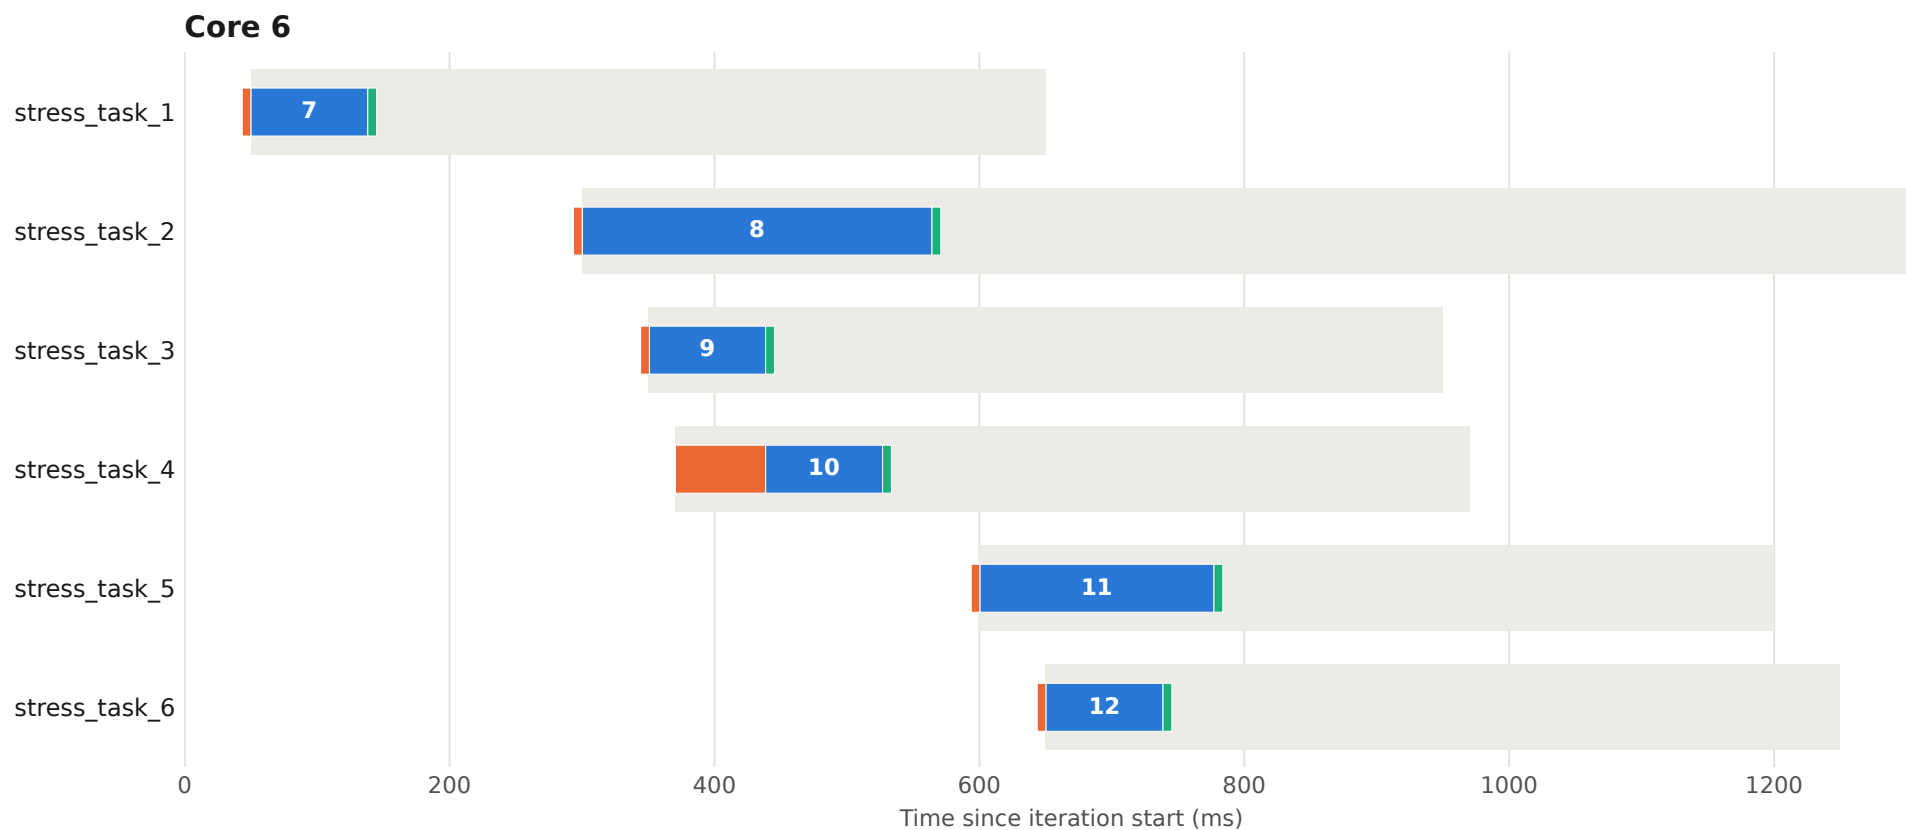


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 69 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

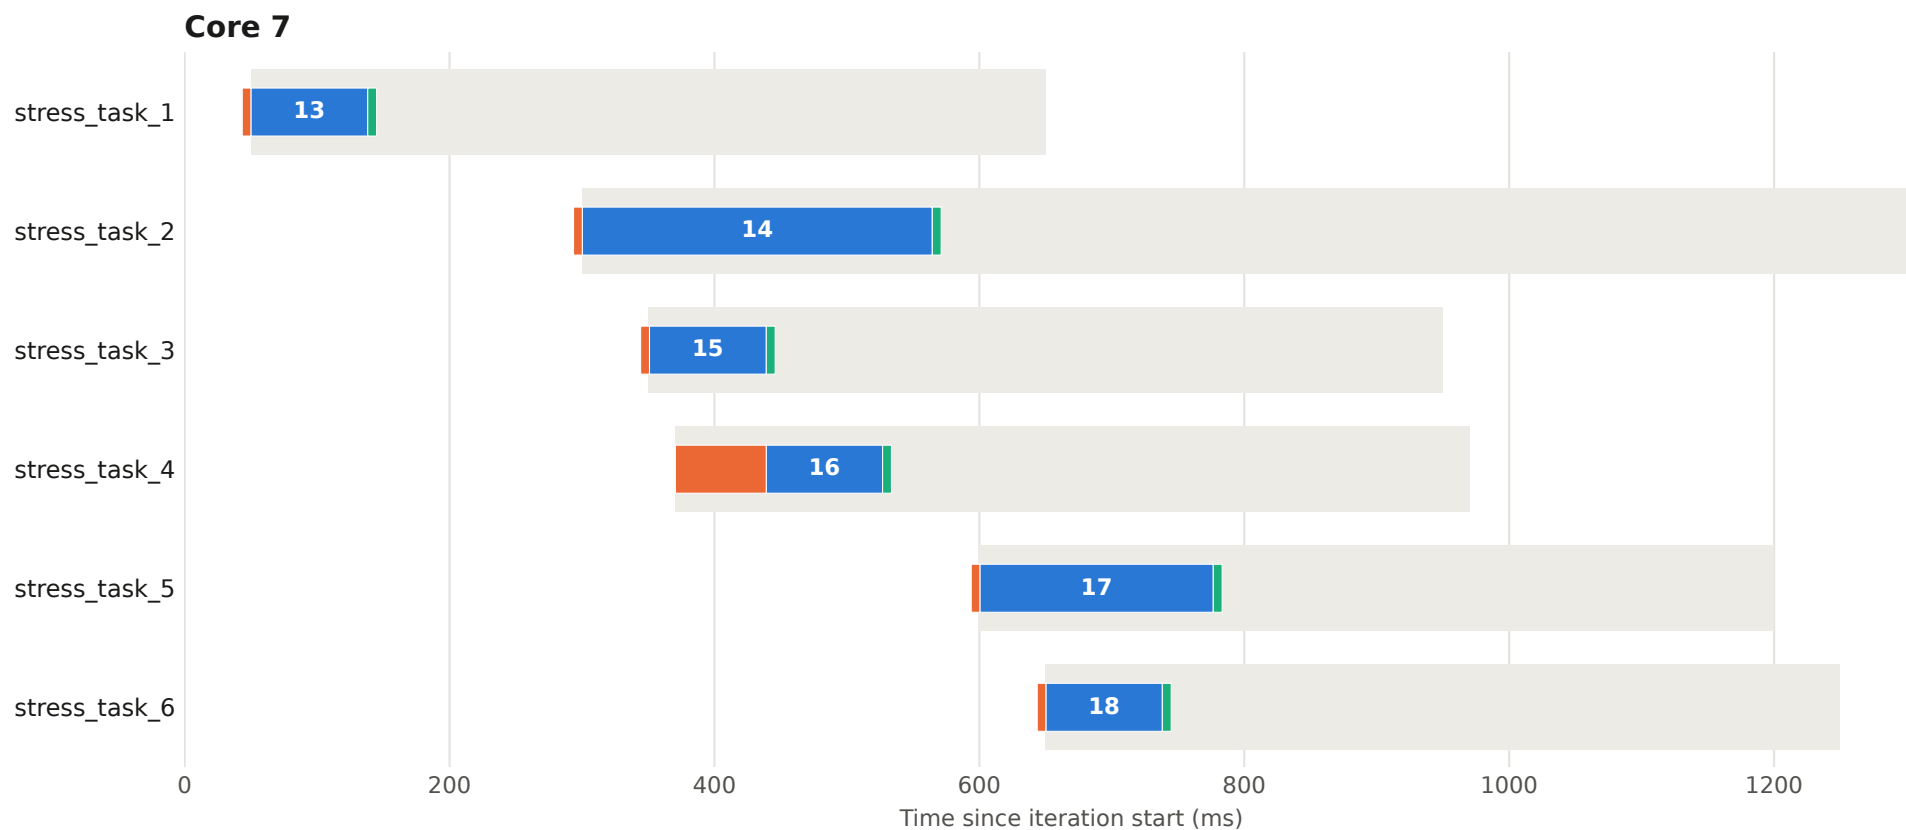


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 70 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

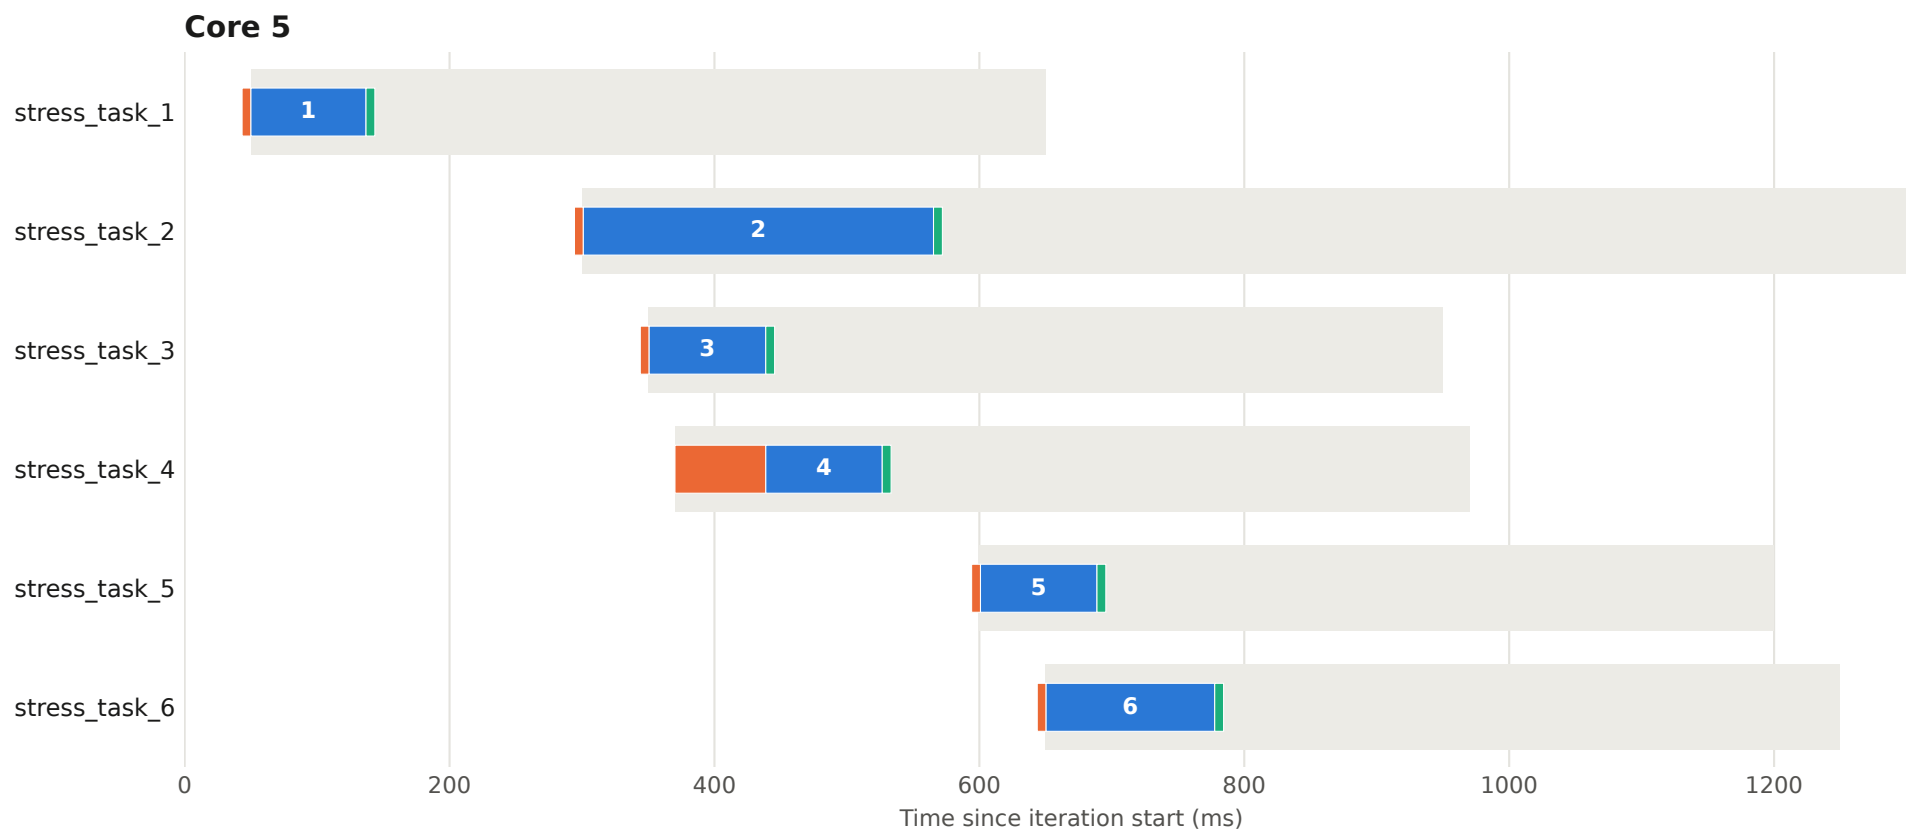


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 70 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

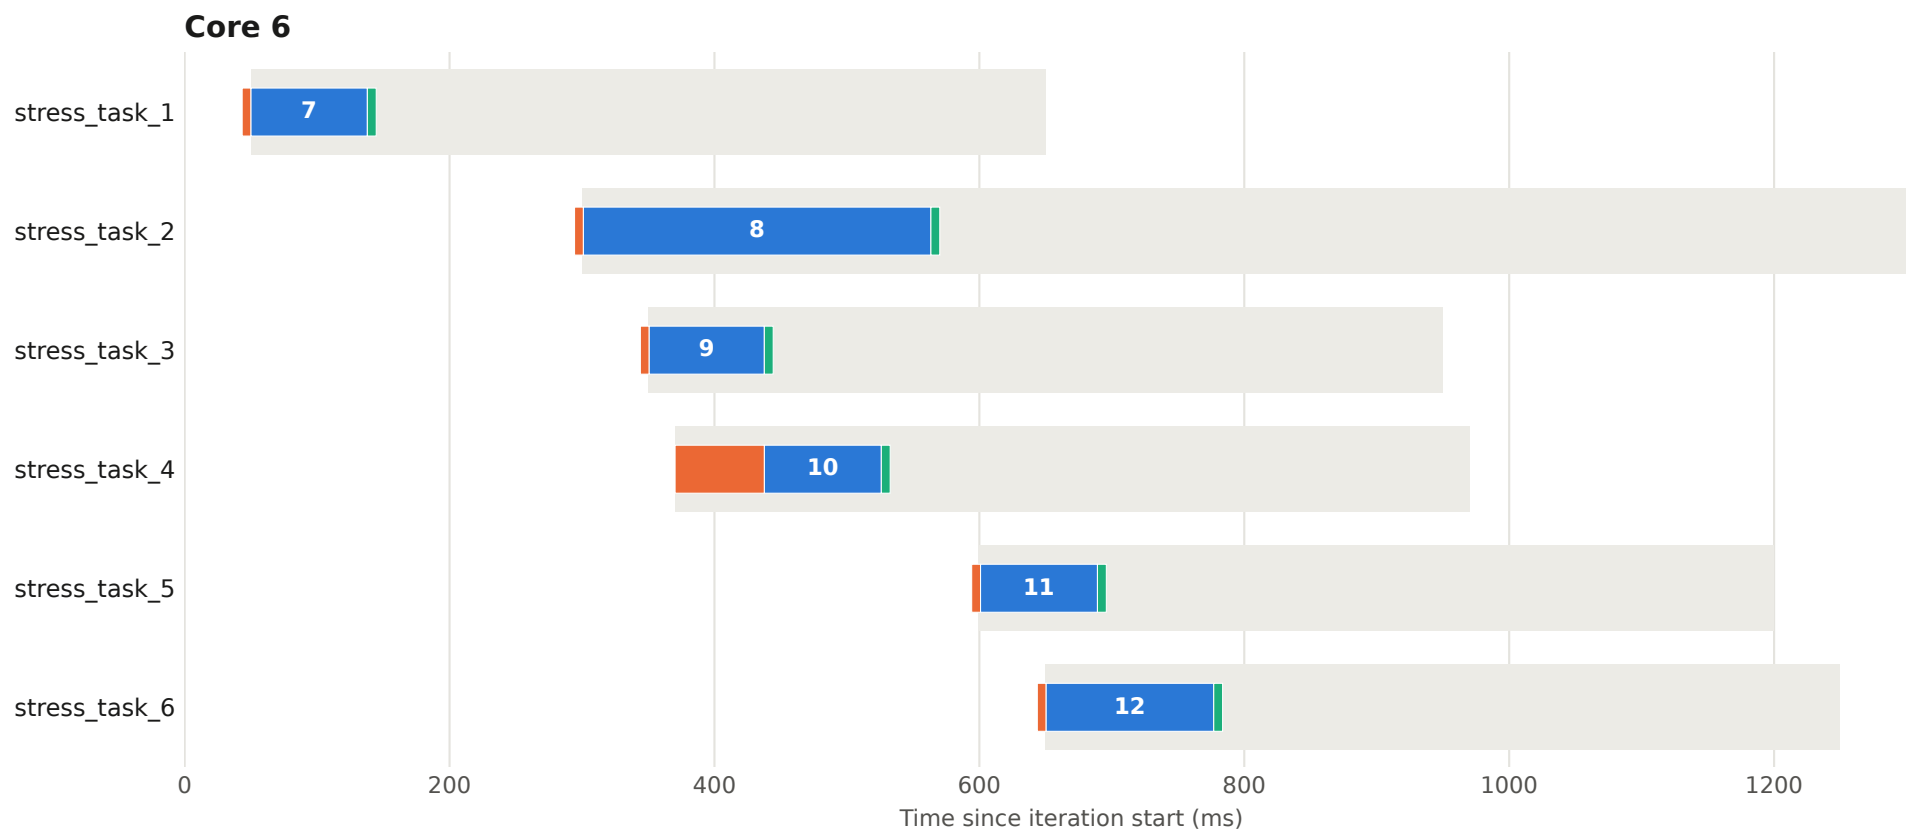


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 70 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

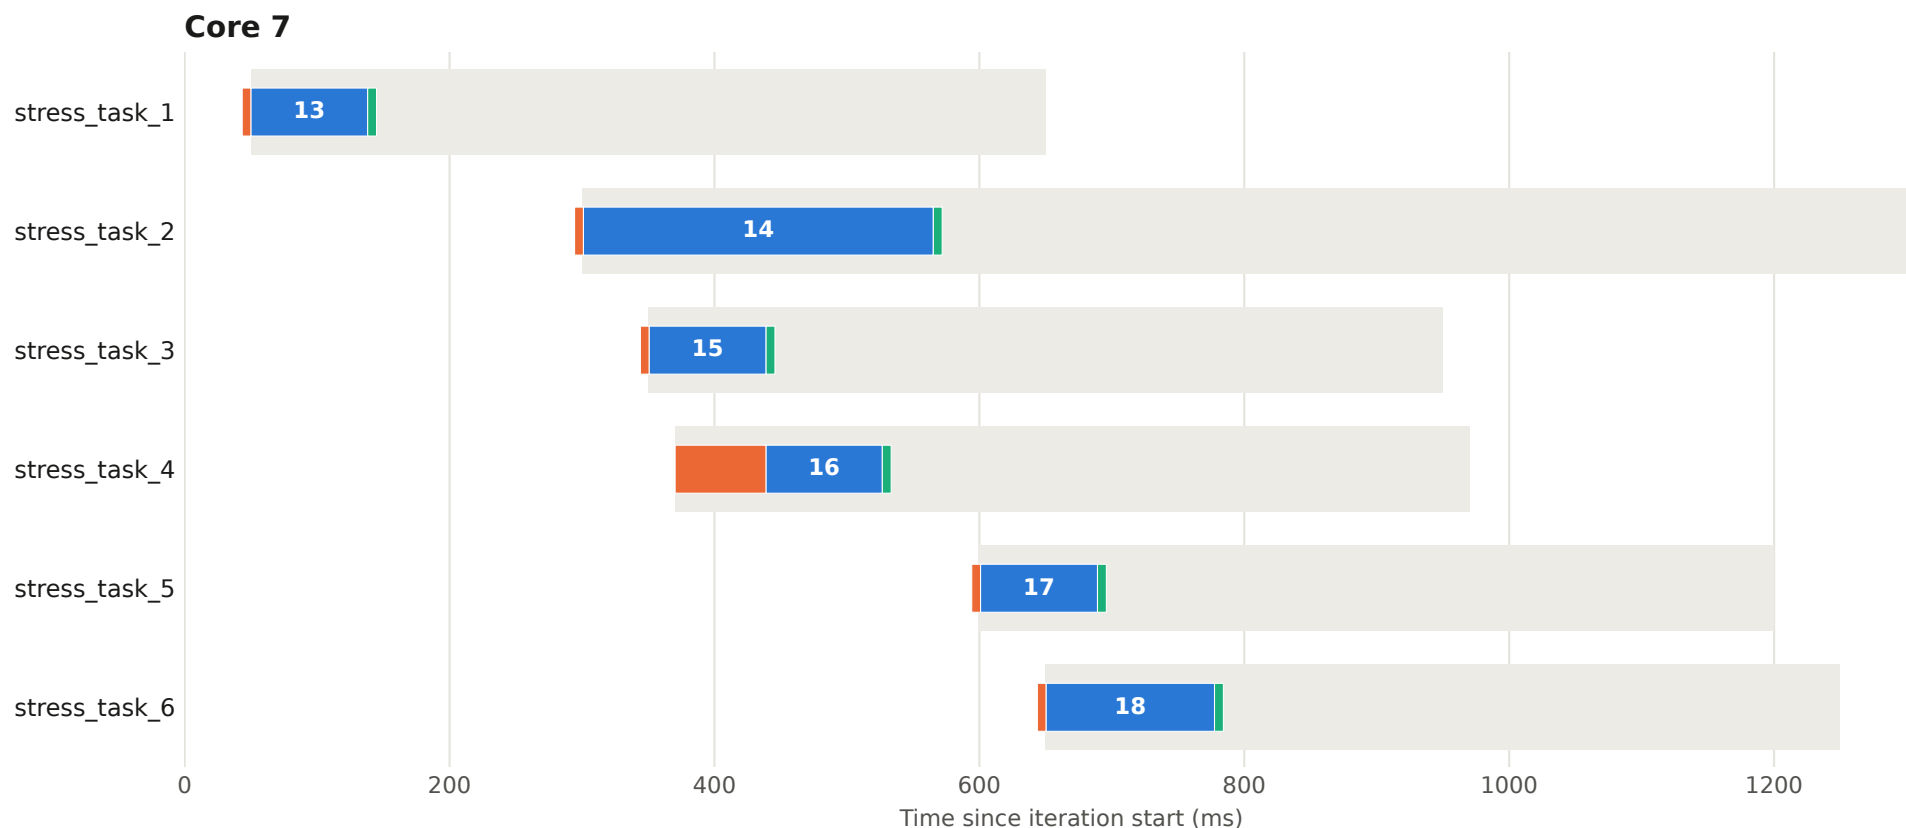


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 71 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

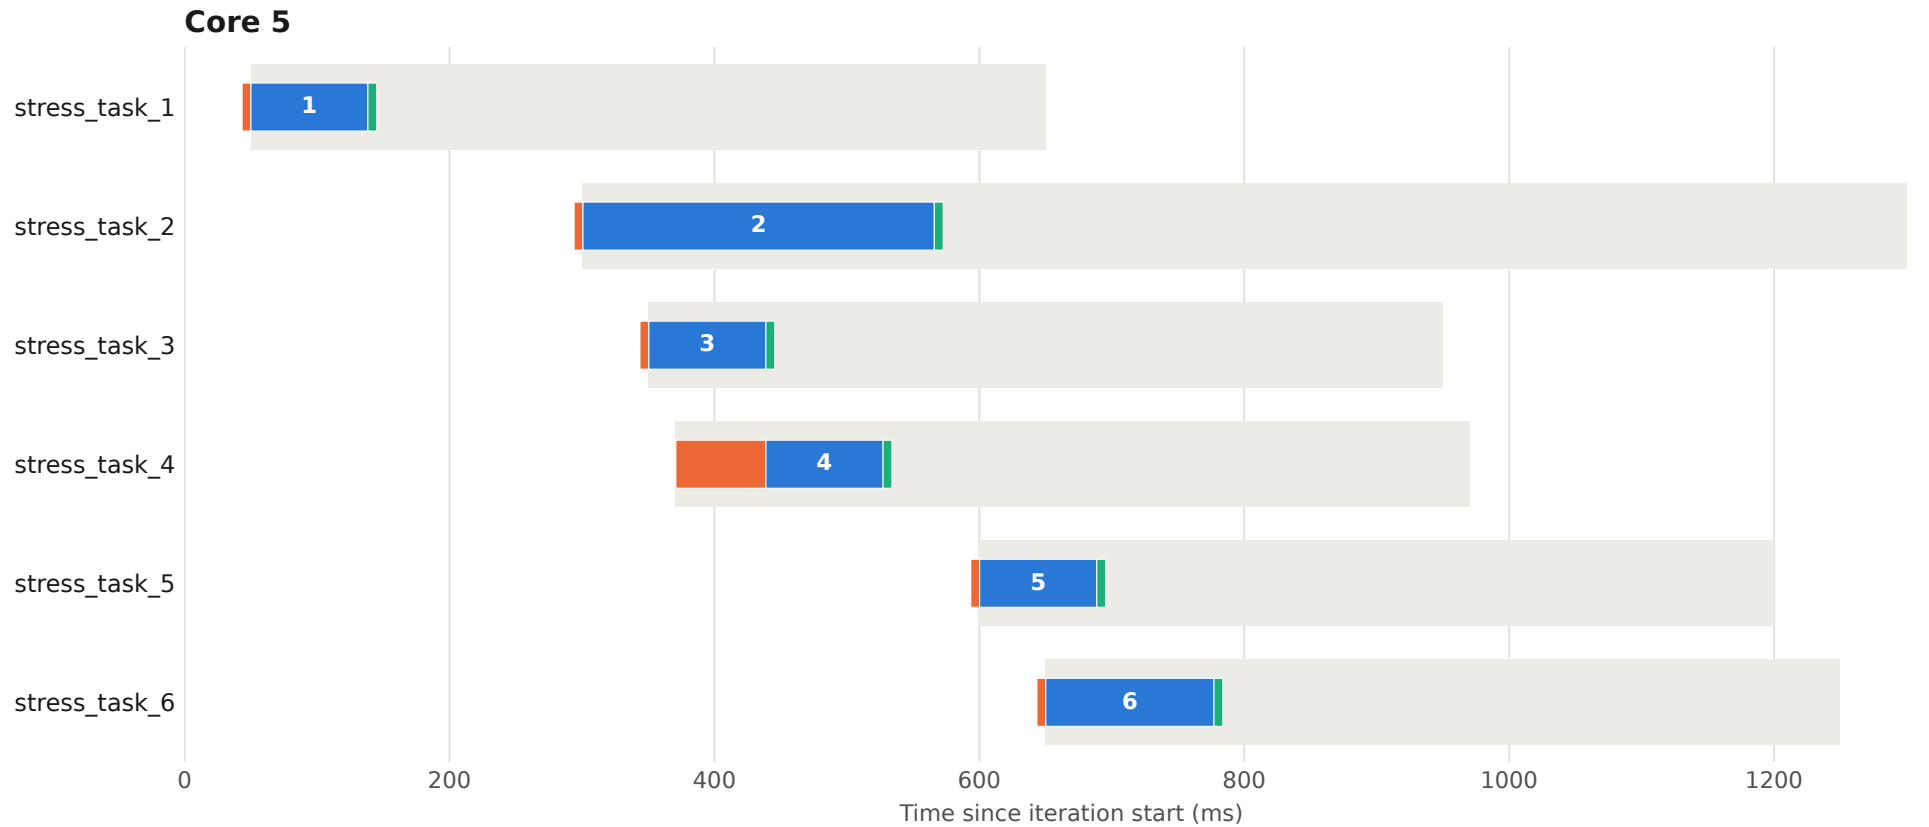


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 71 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

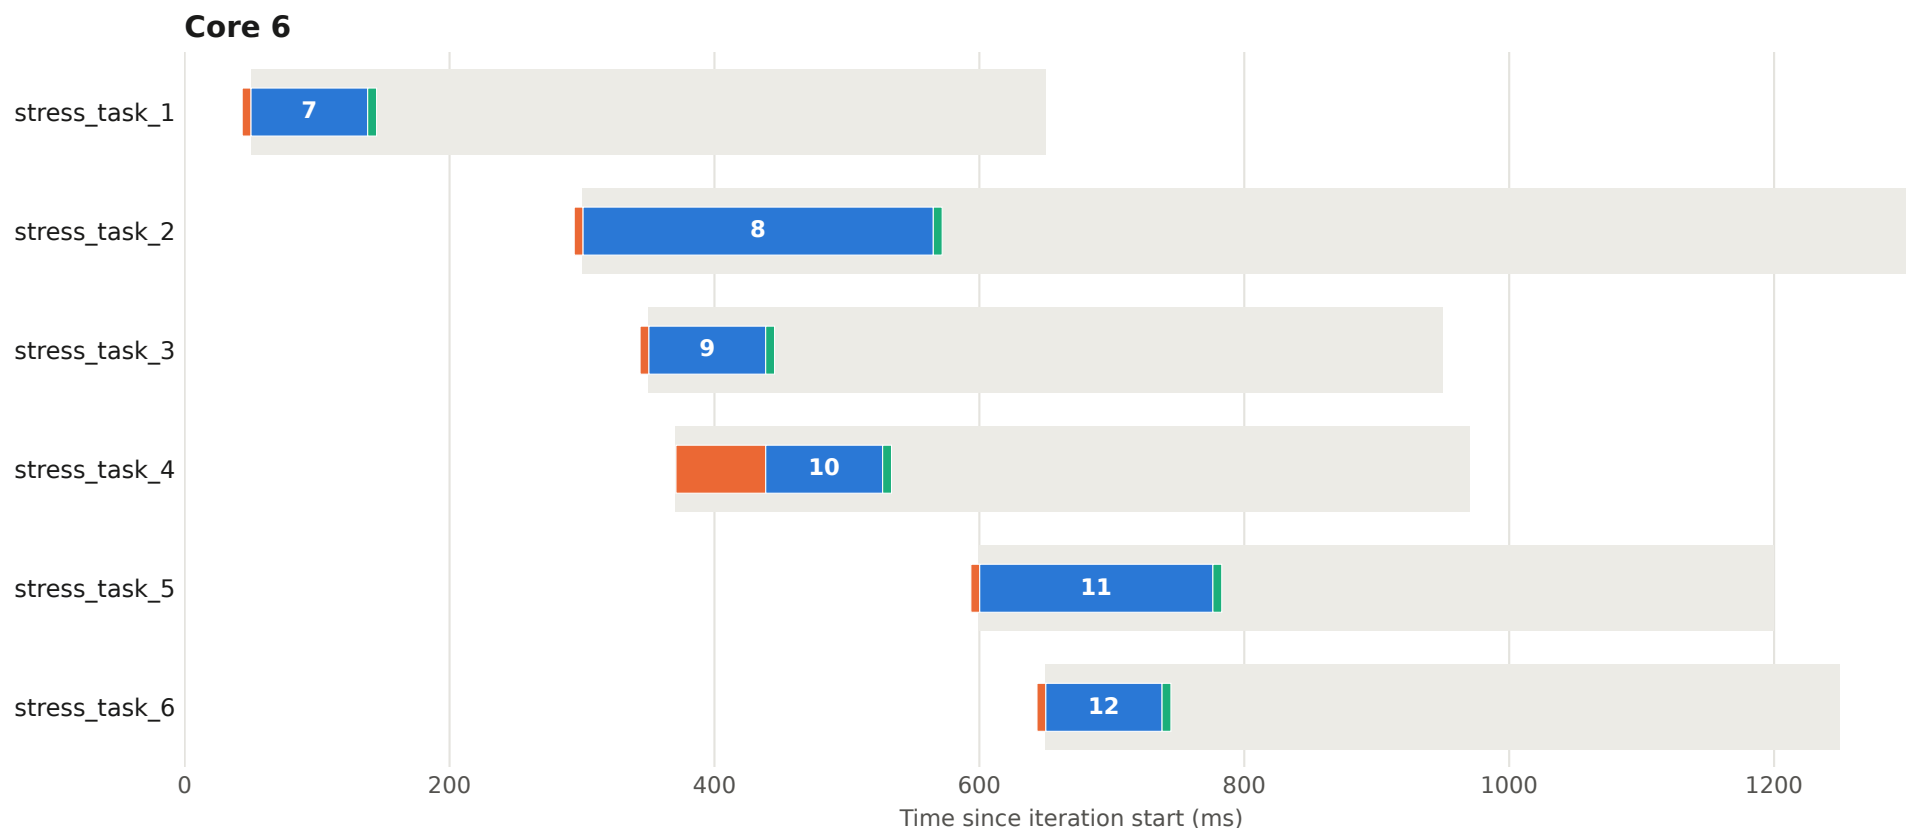


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 71 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

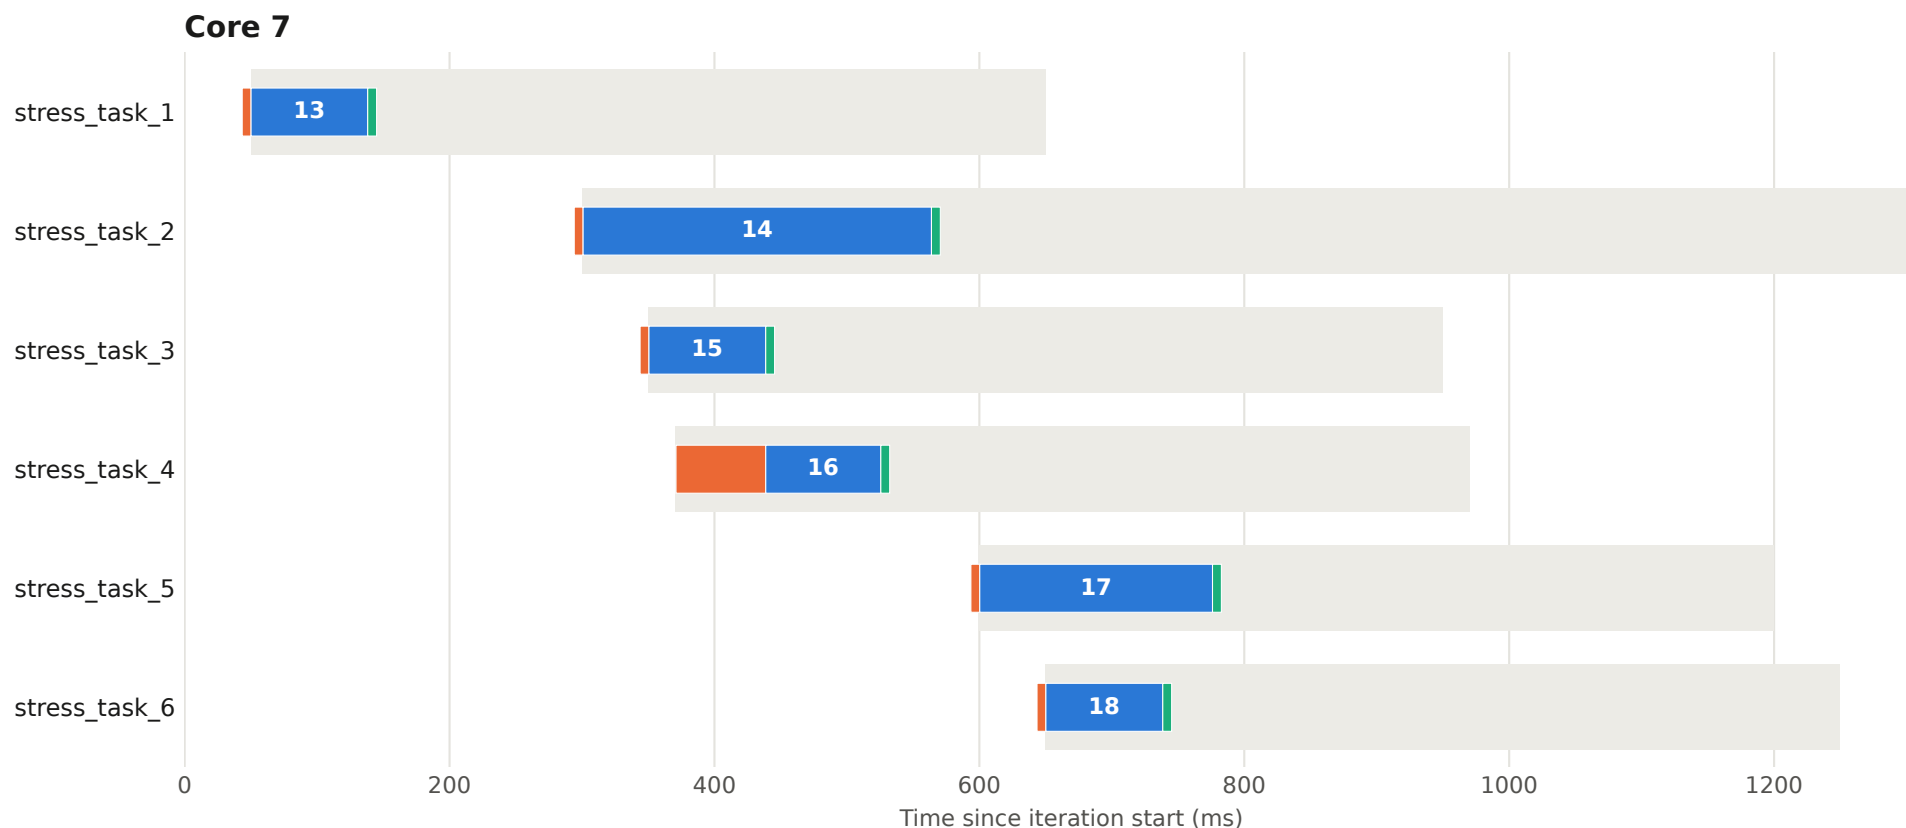


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 72 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

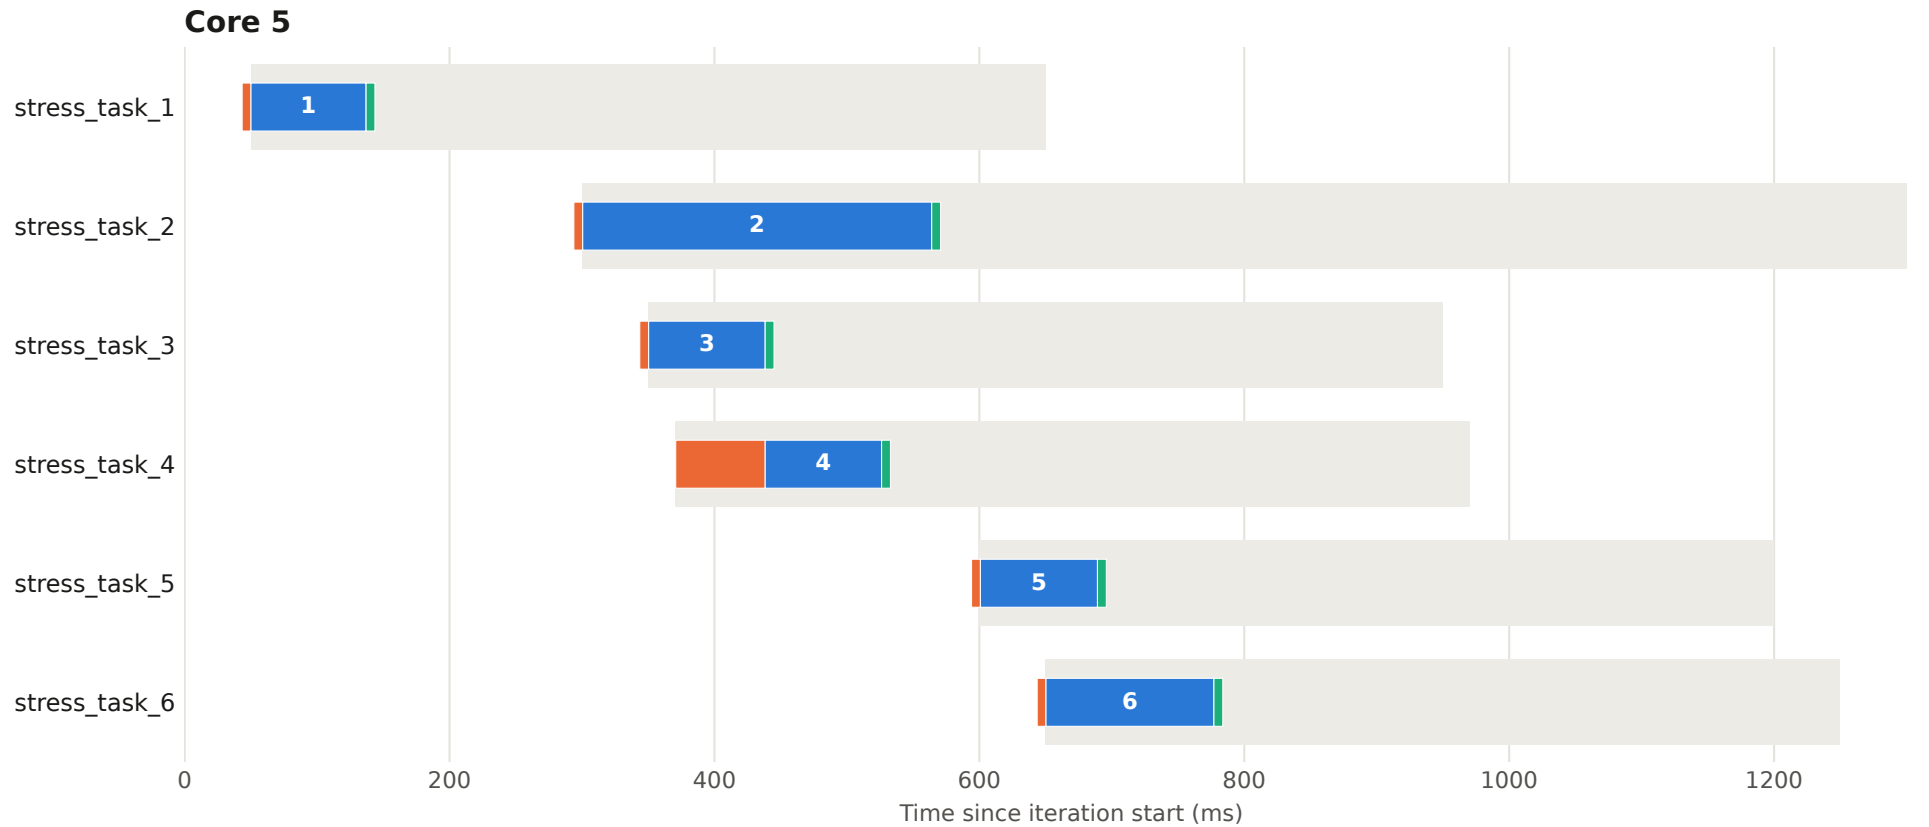


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 72 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

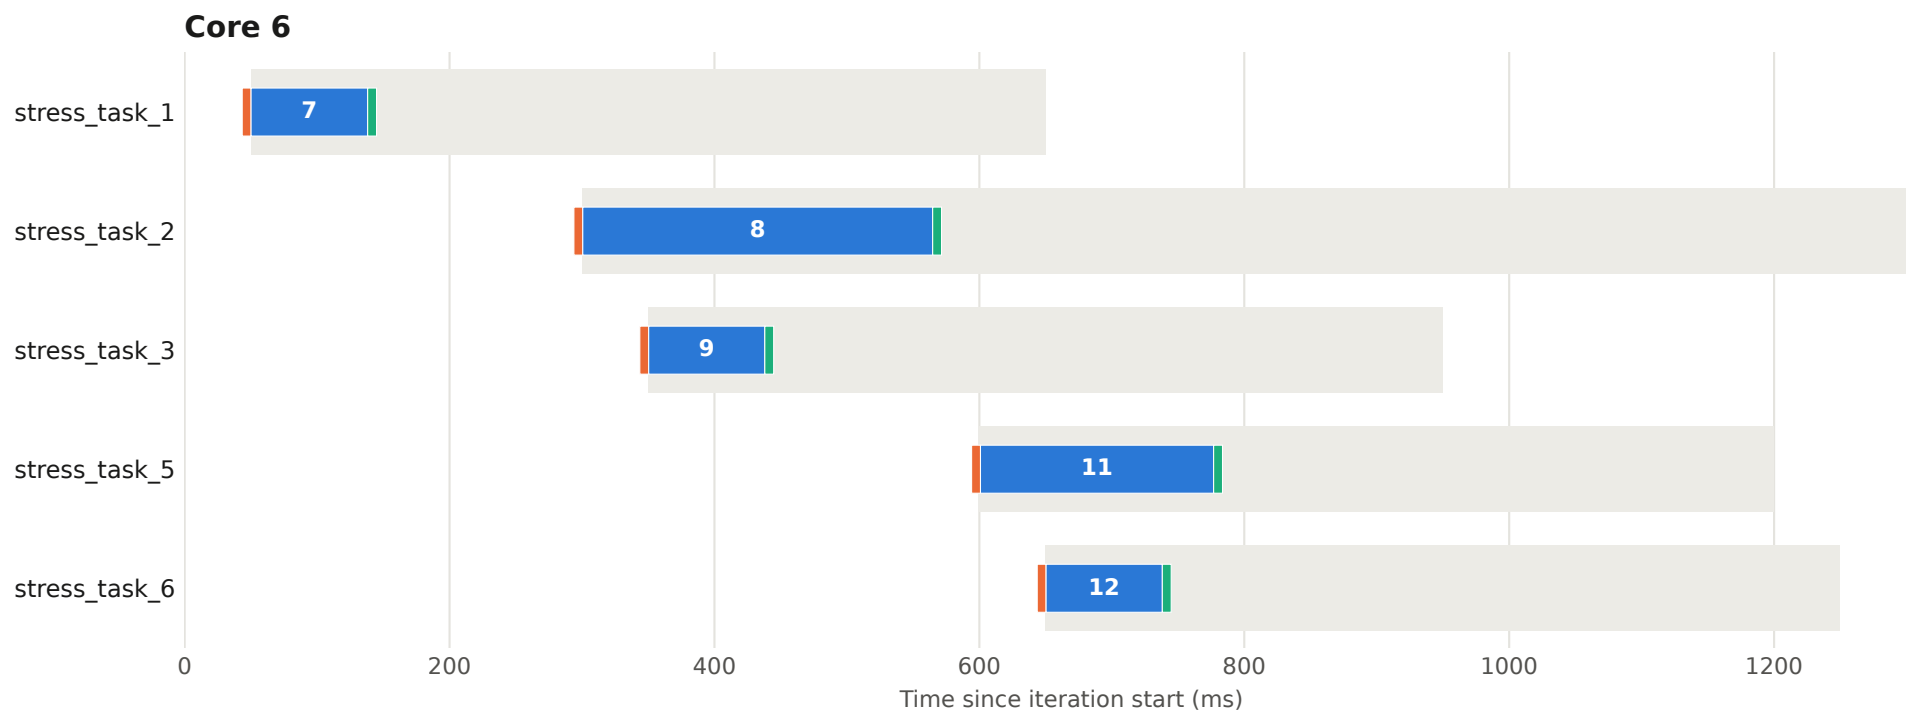


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 72 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

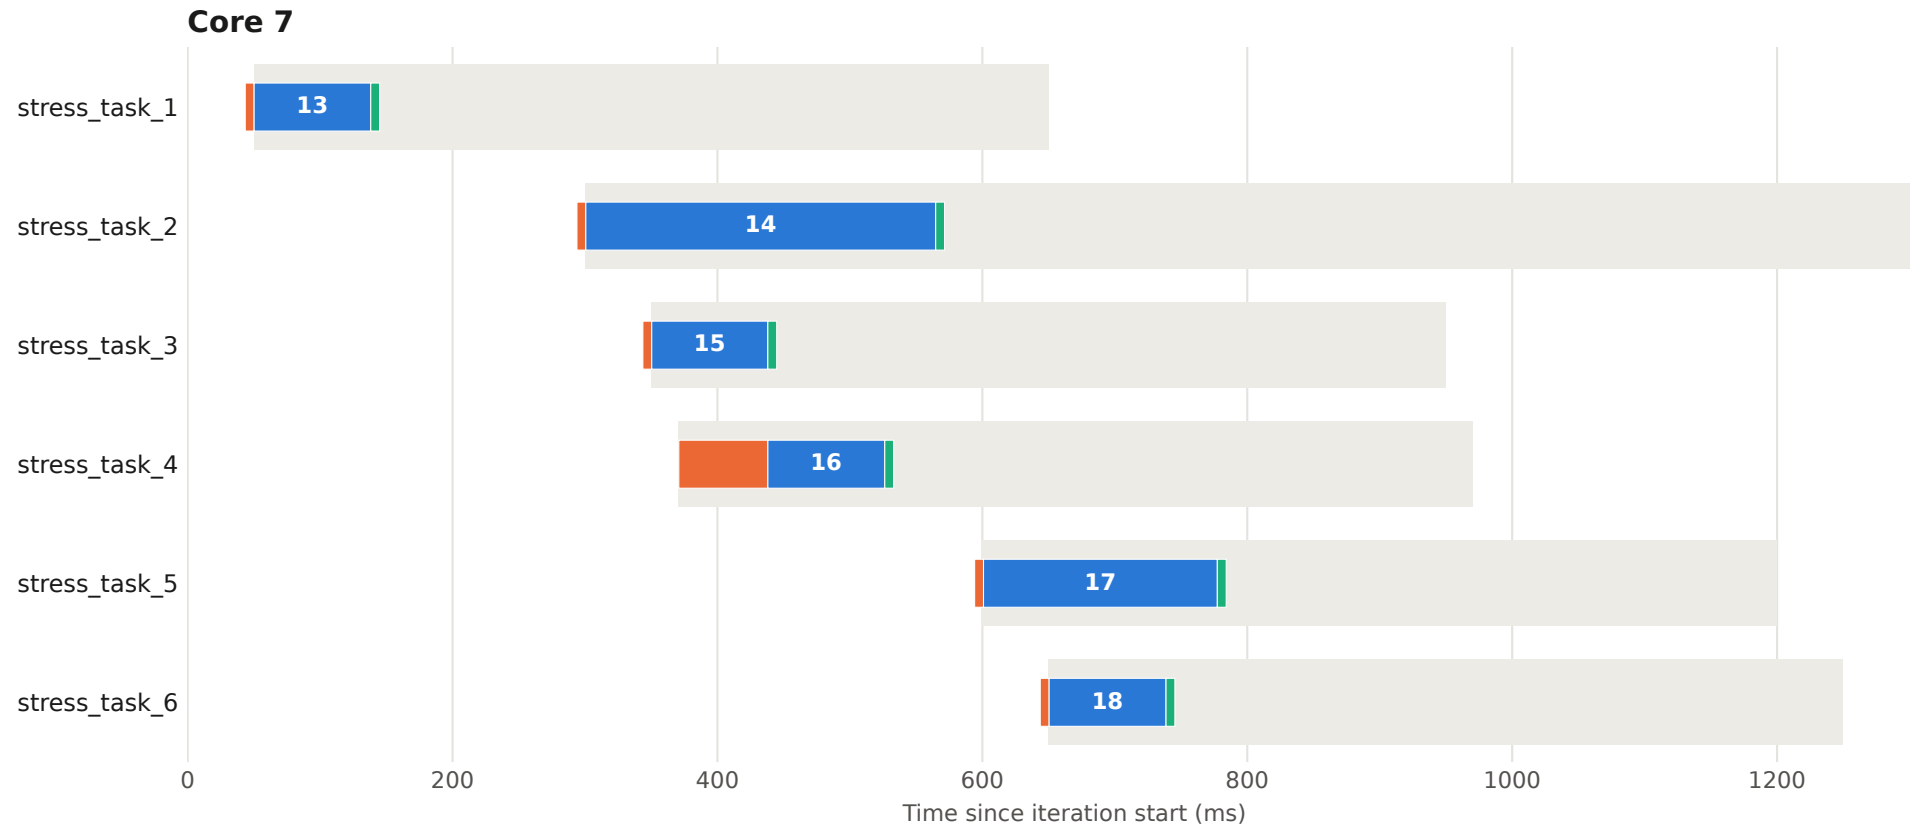


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 73 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

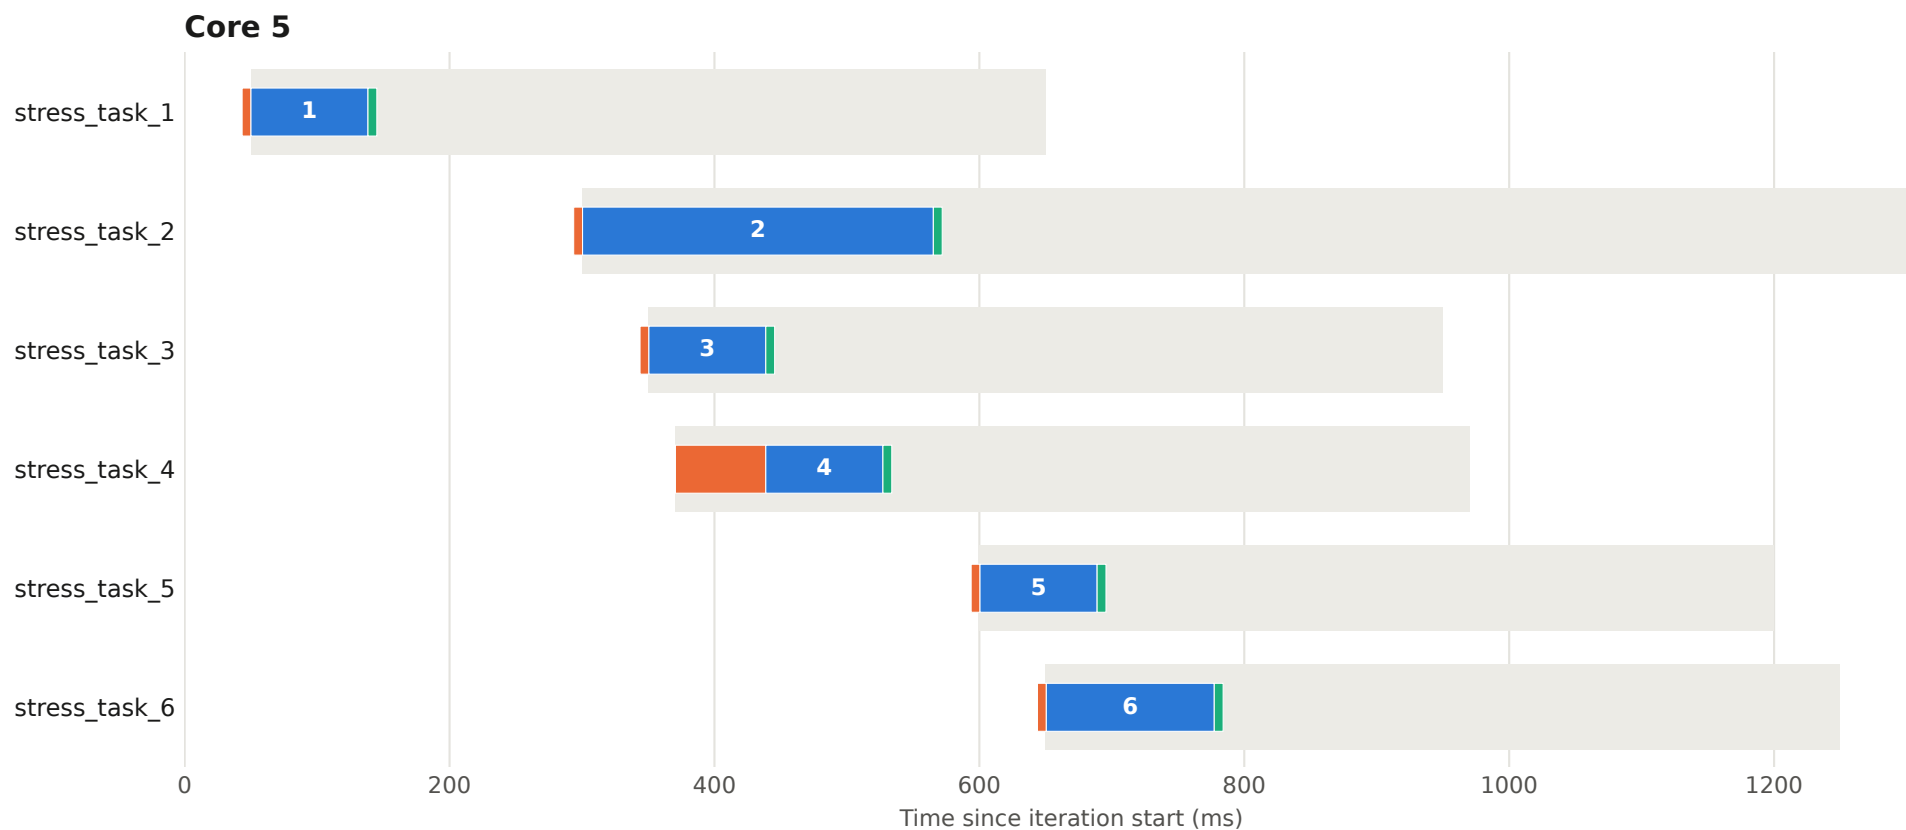


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 73 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

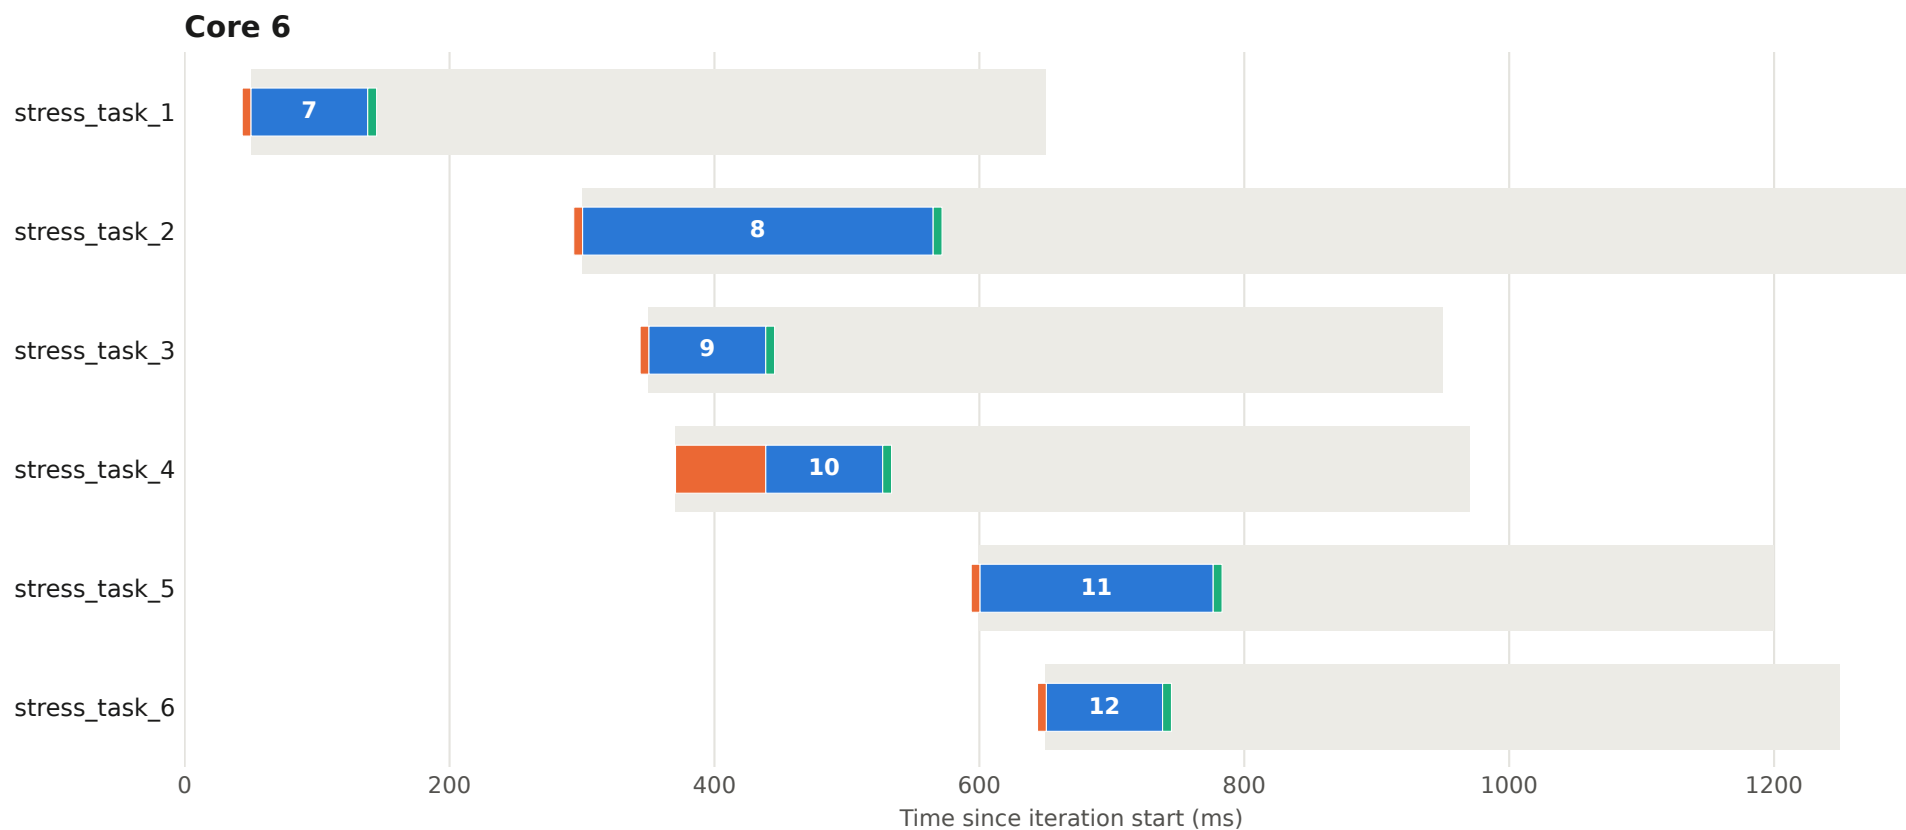


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 73 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

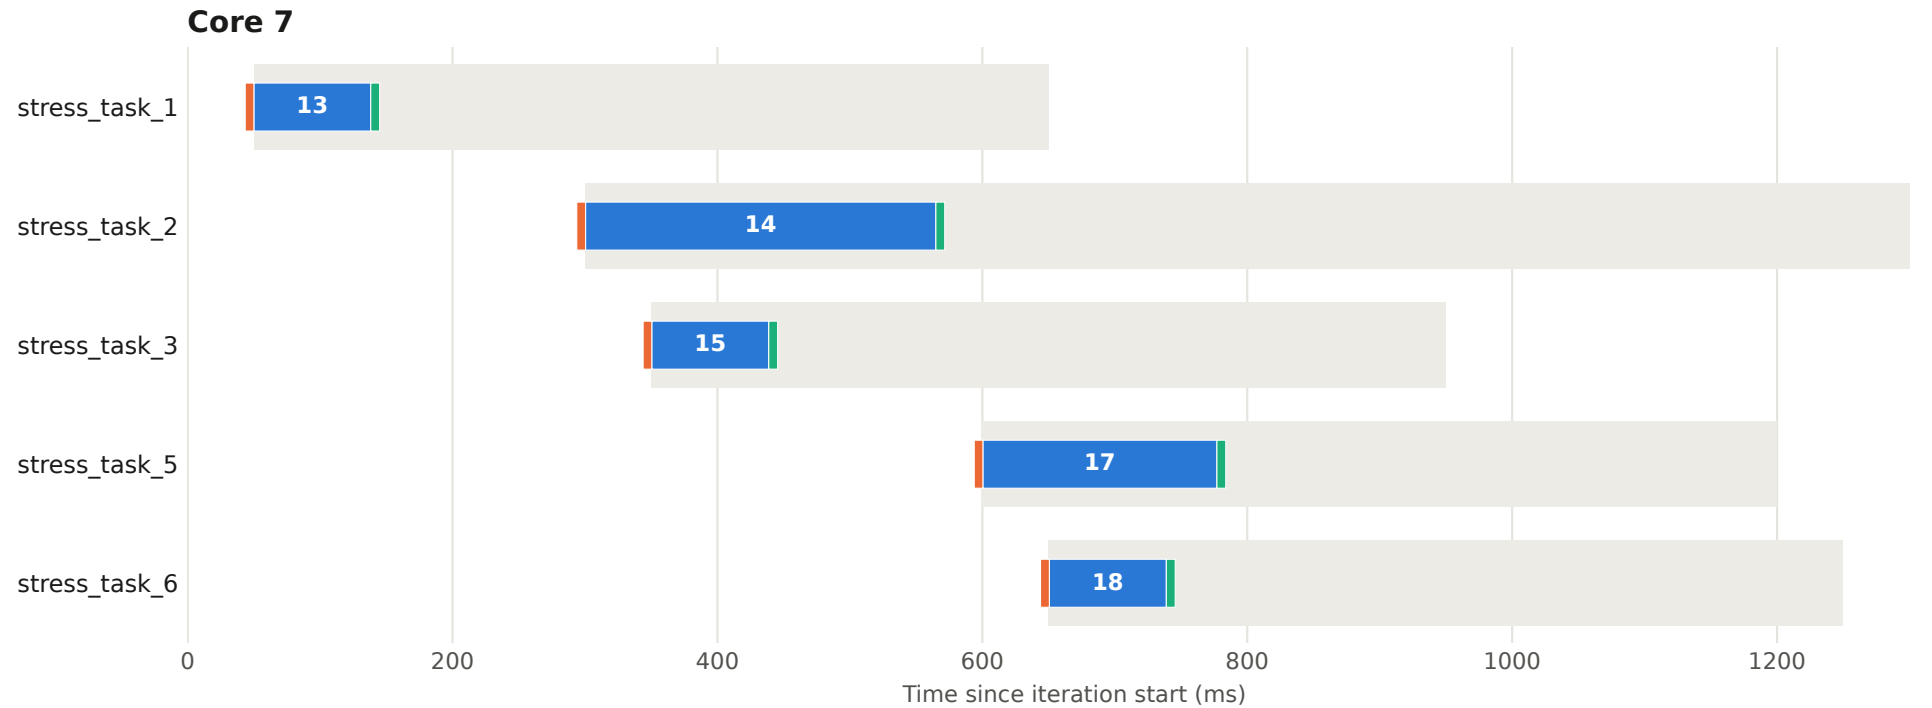


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 74 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

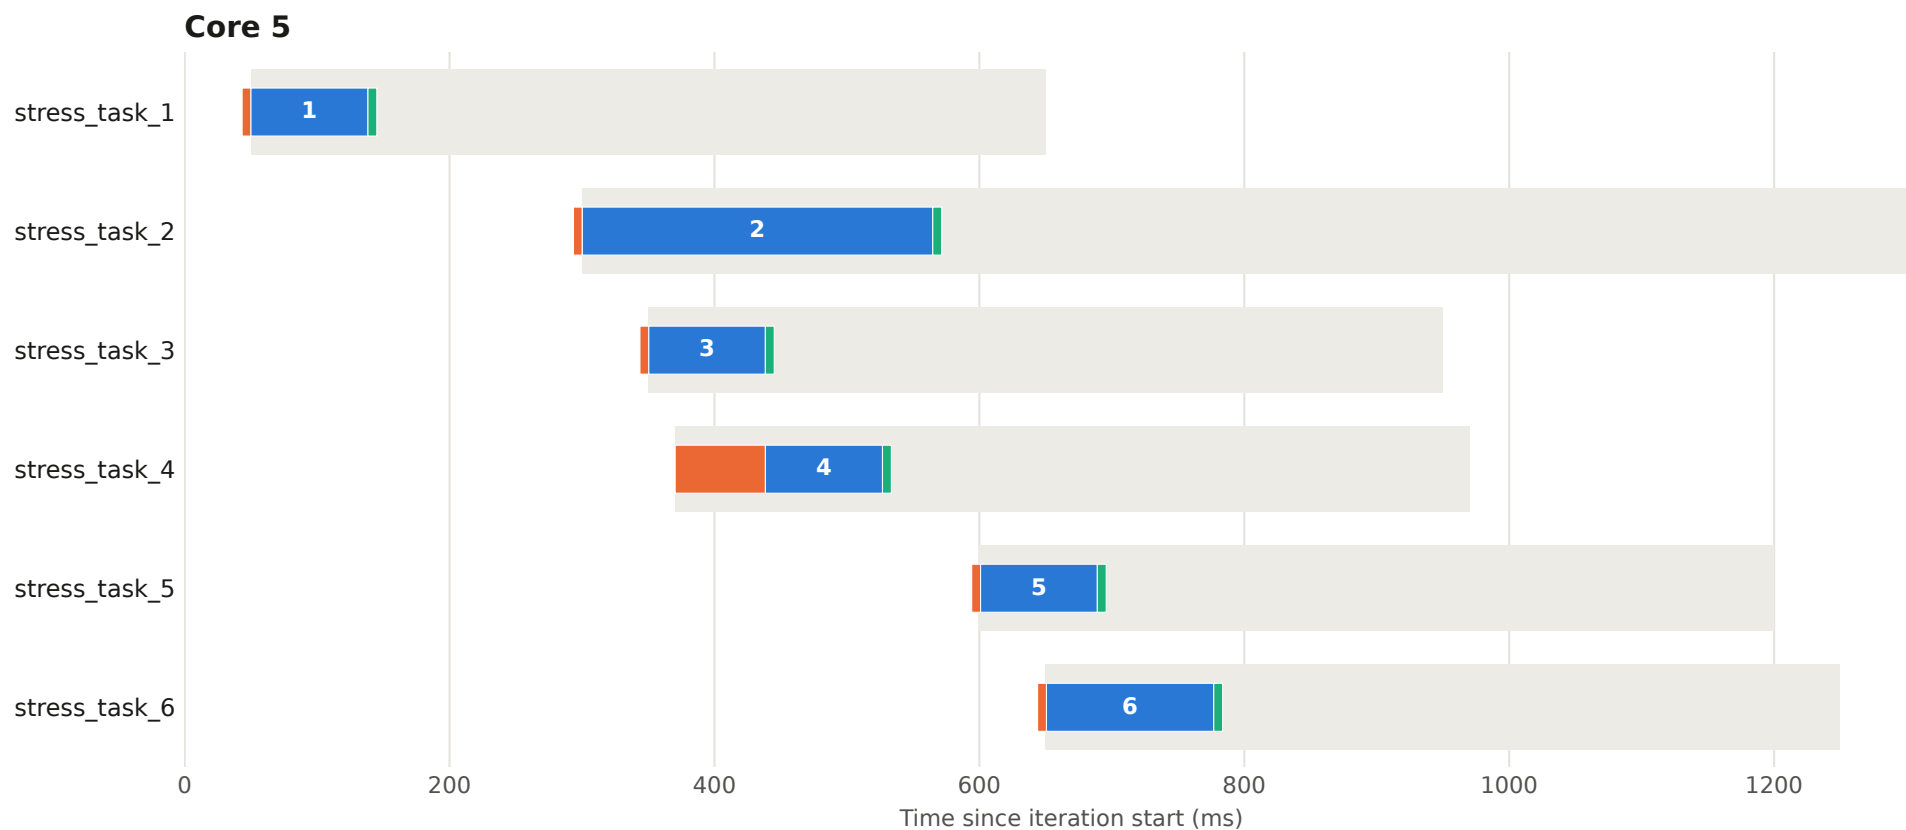


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 74 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

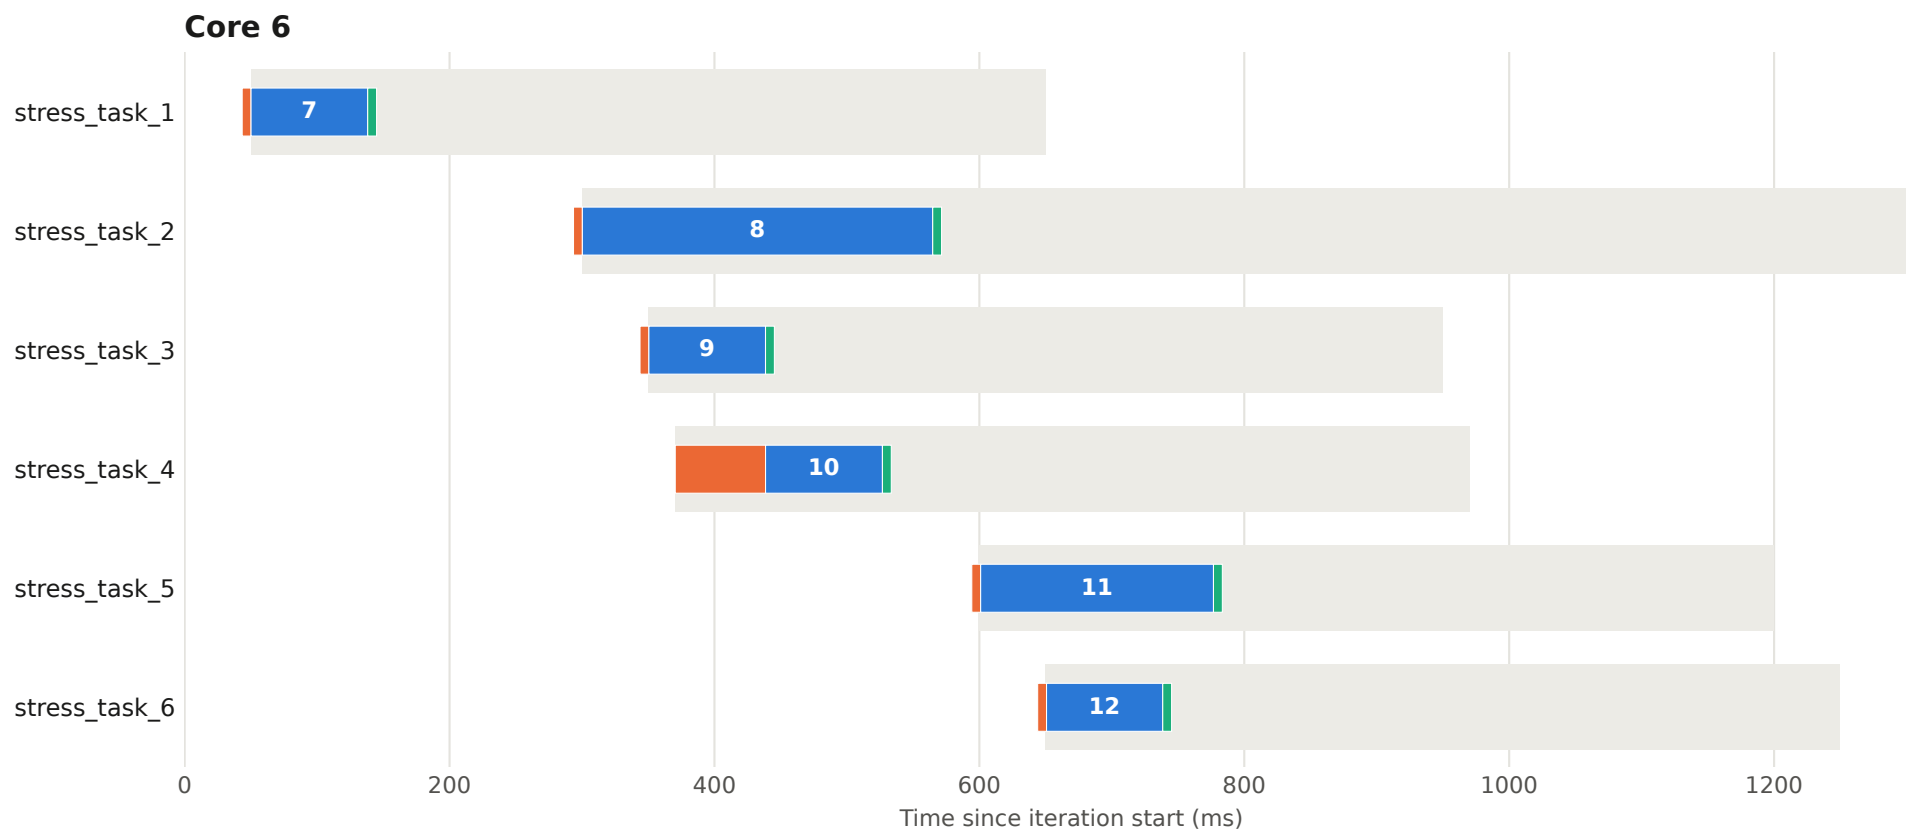


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 74 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

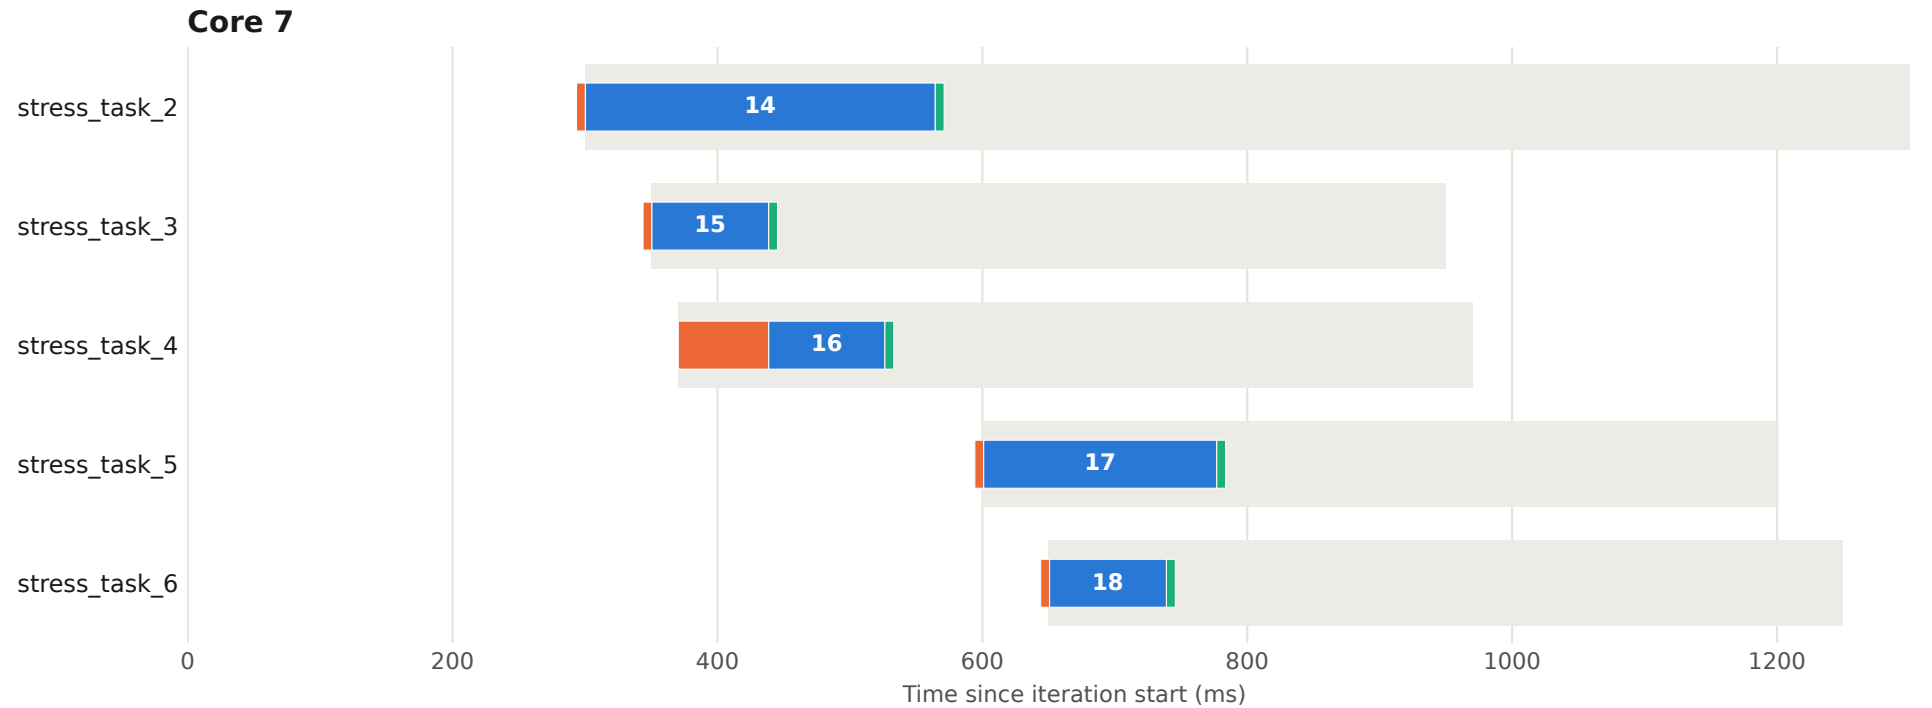


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 75 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

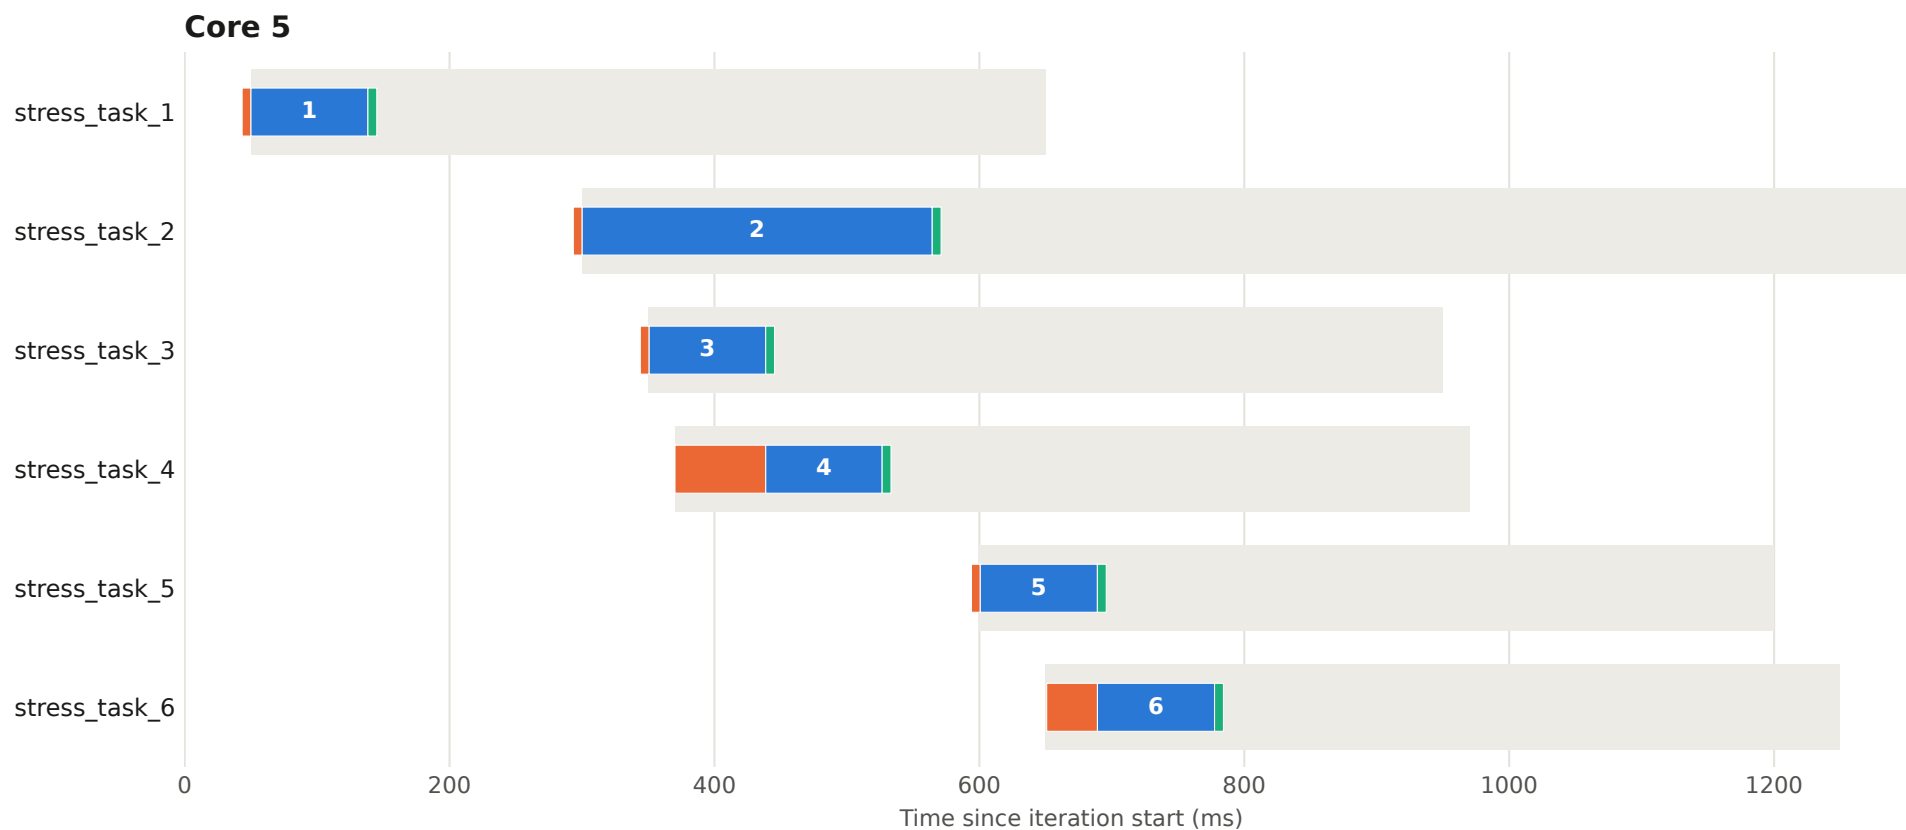


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 75 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

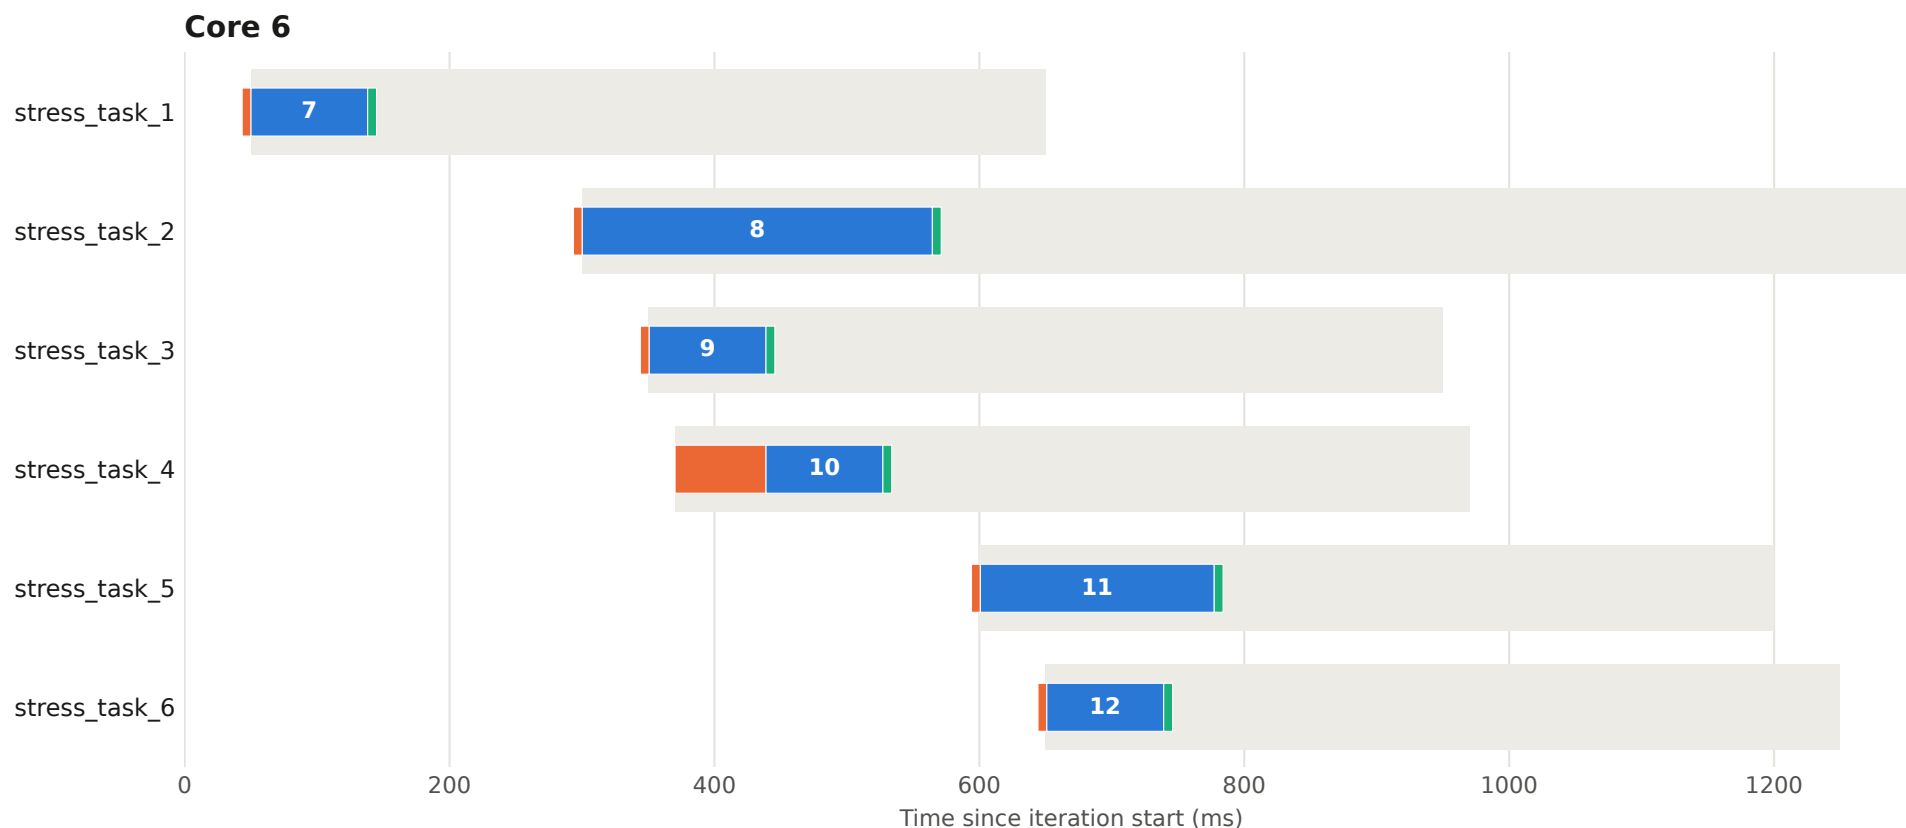


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 75 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

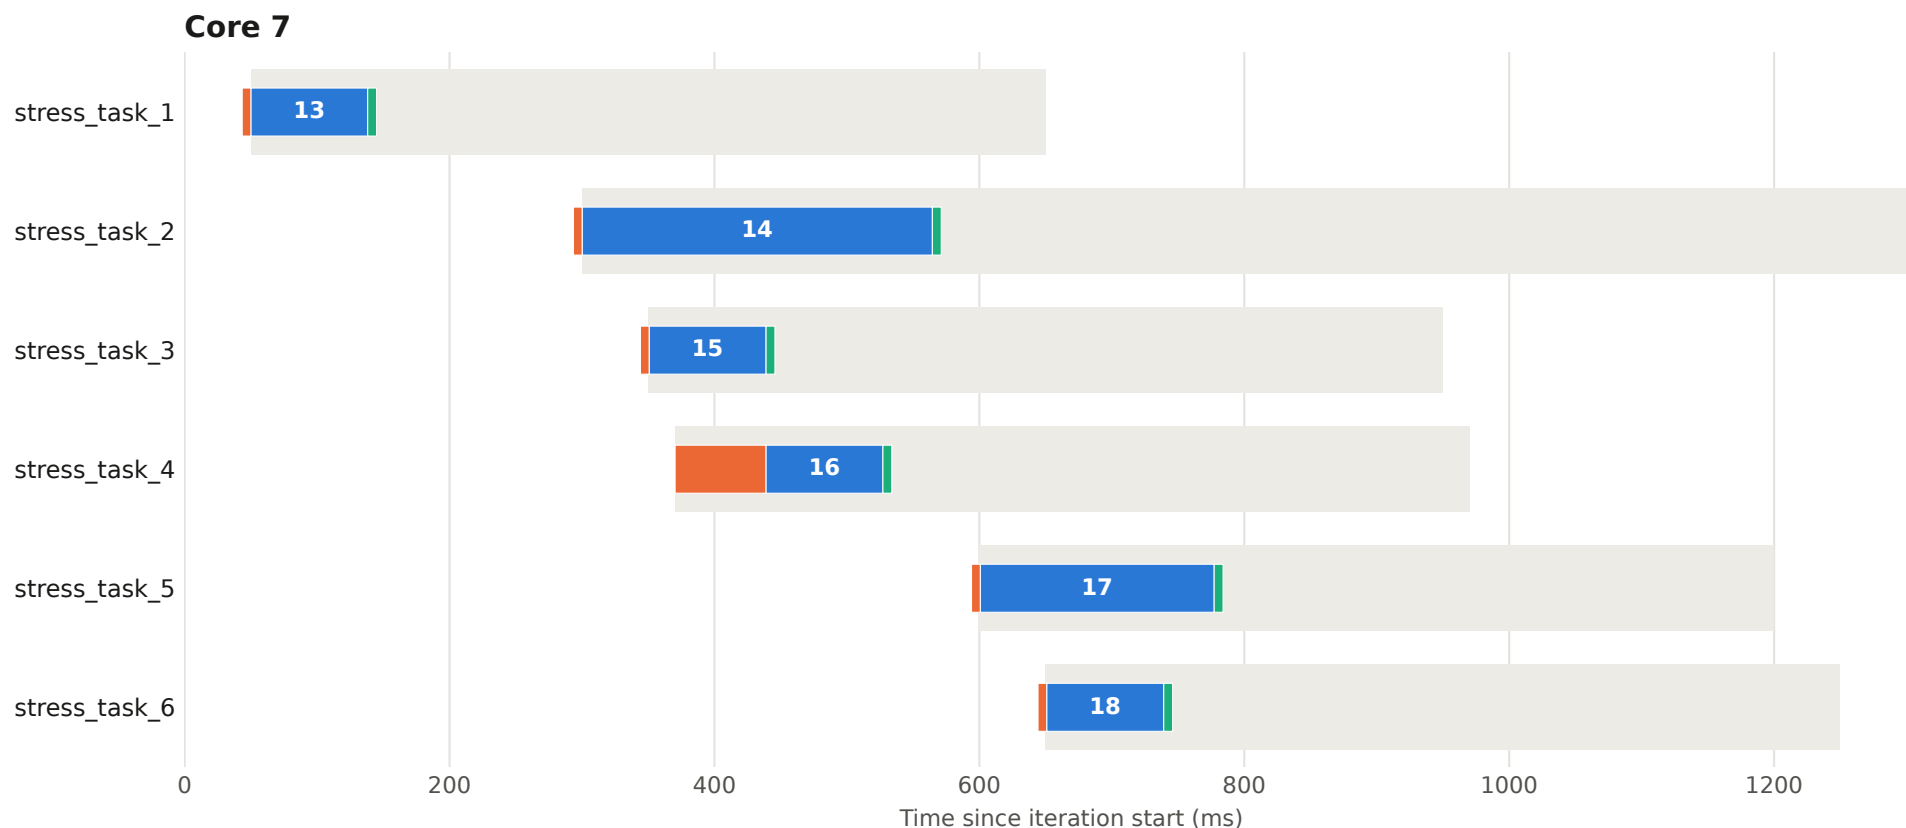


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 76 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

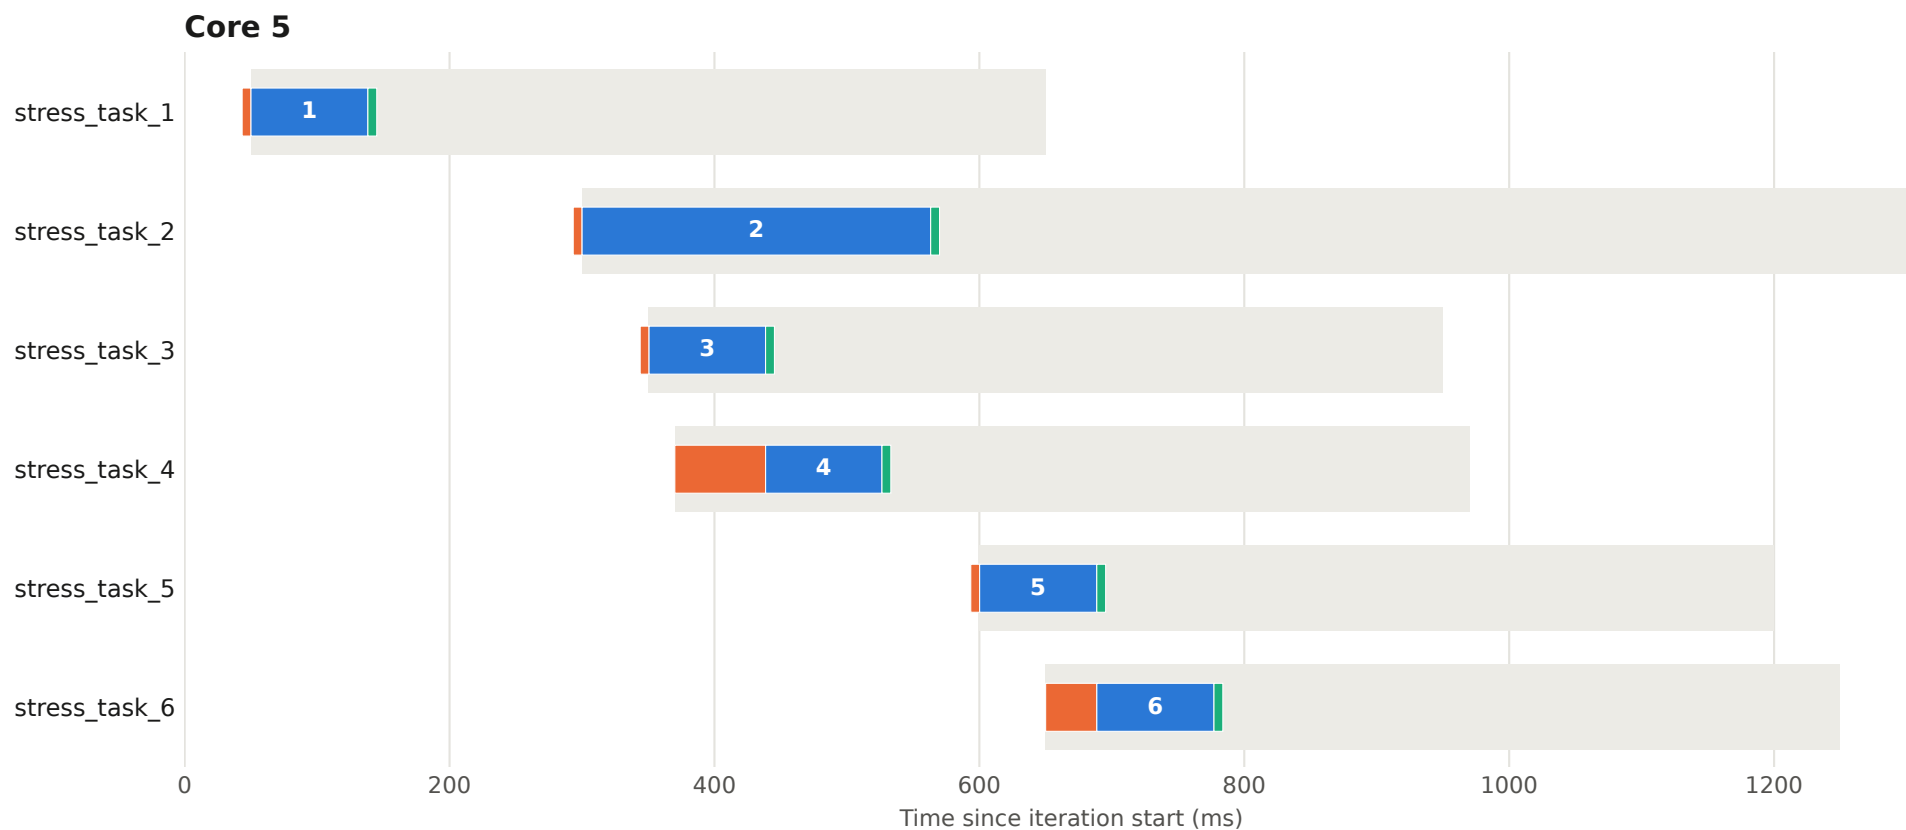


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 76 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

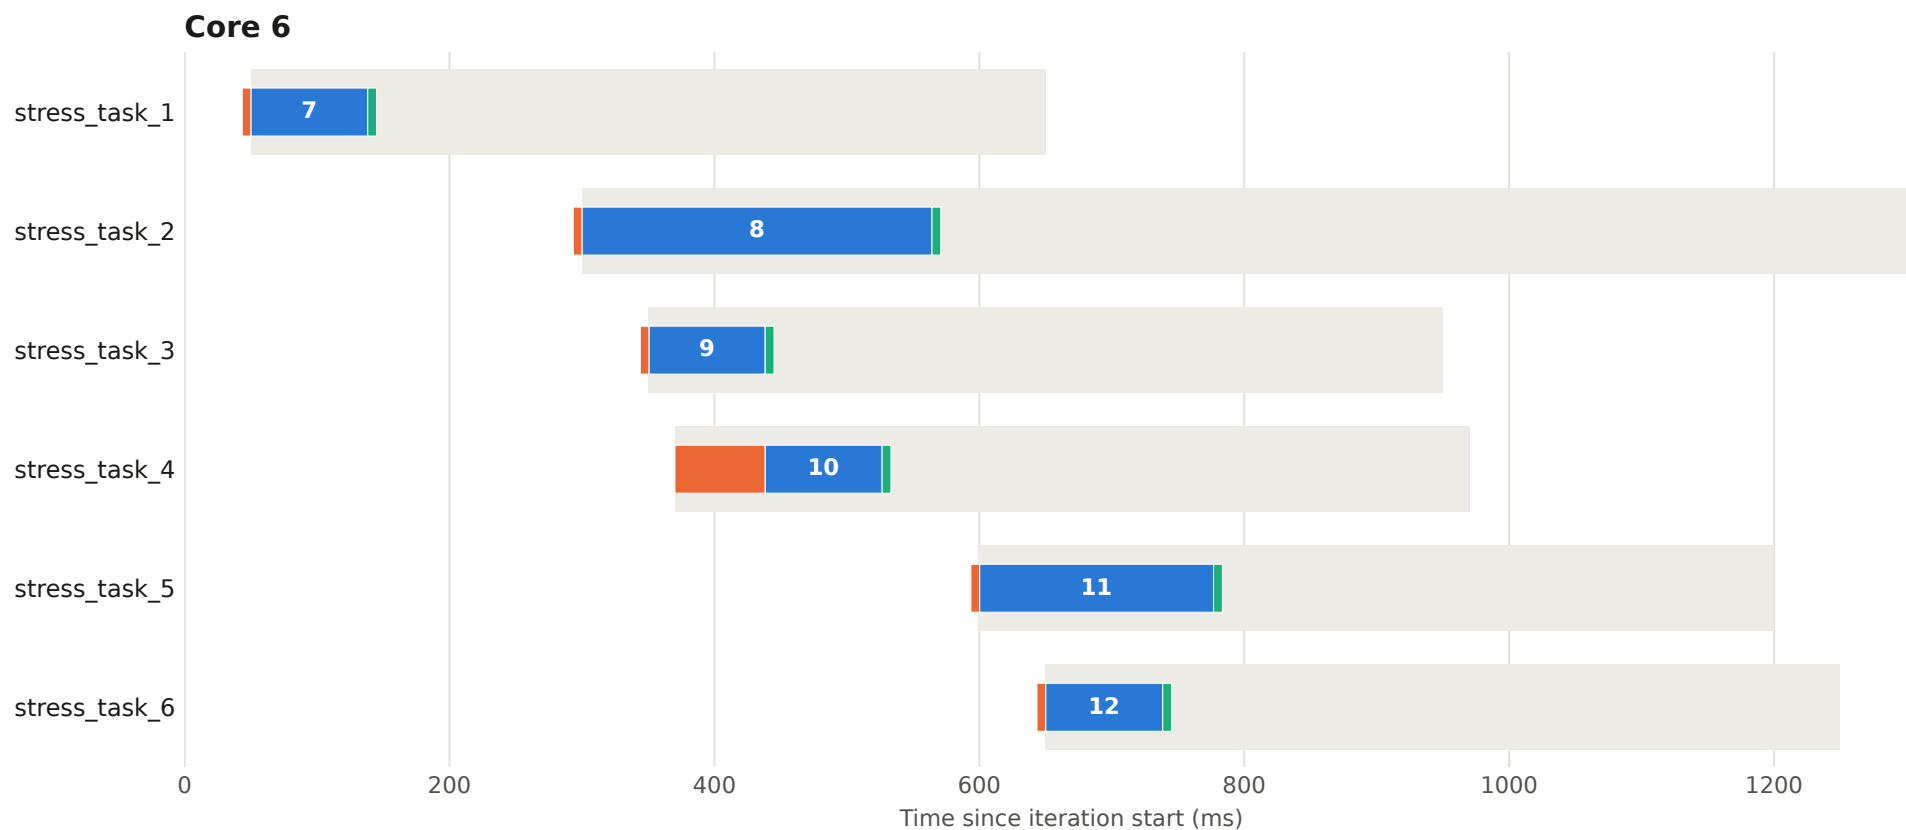


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 76 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

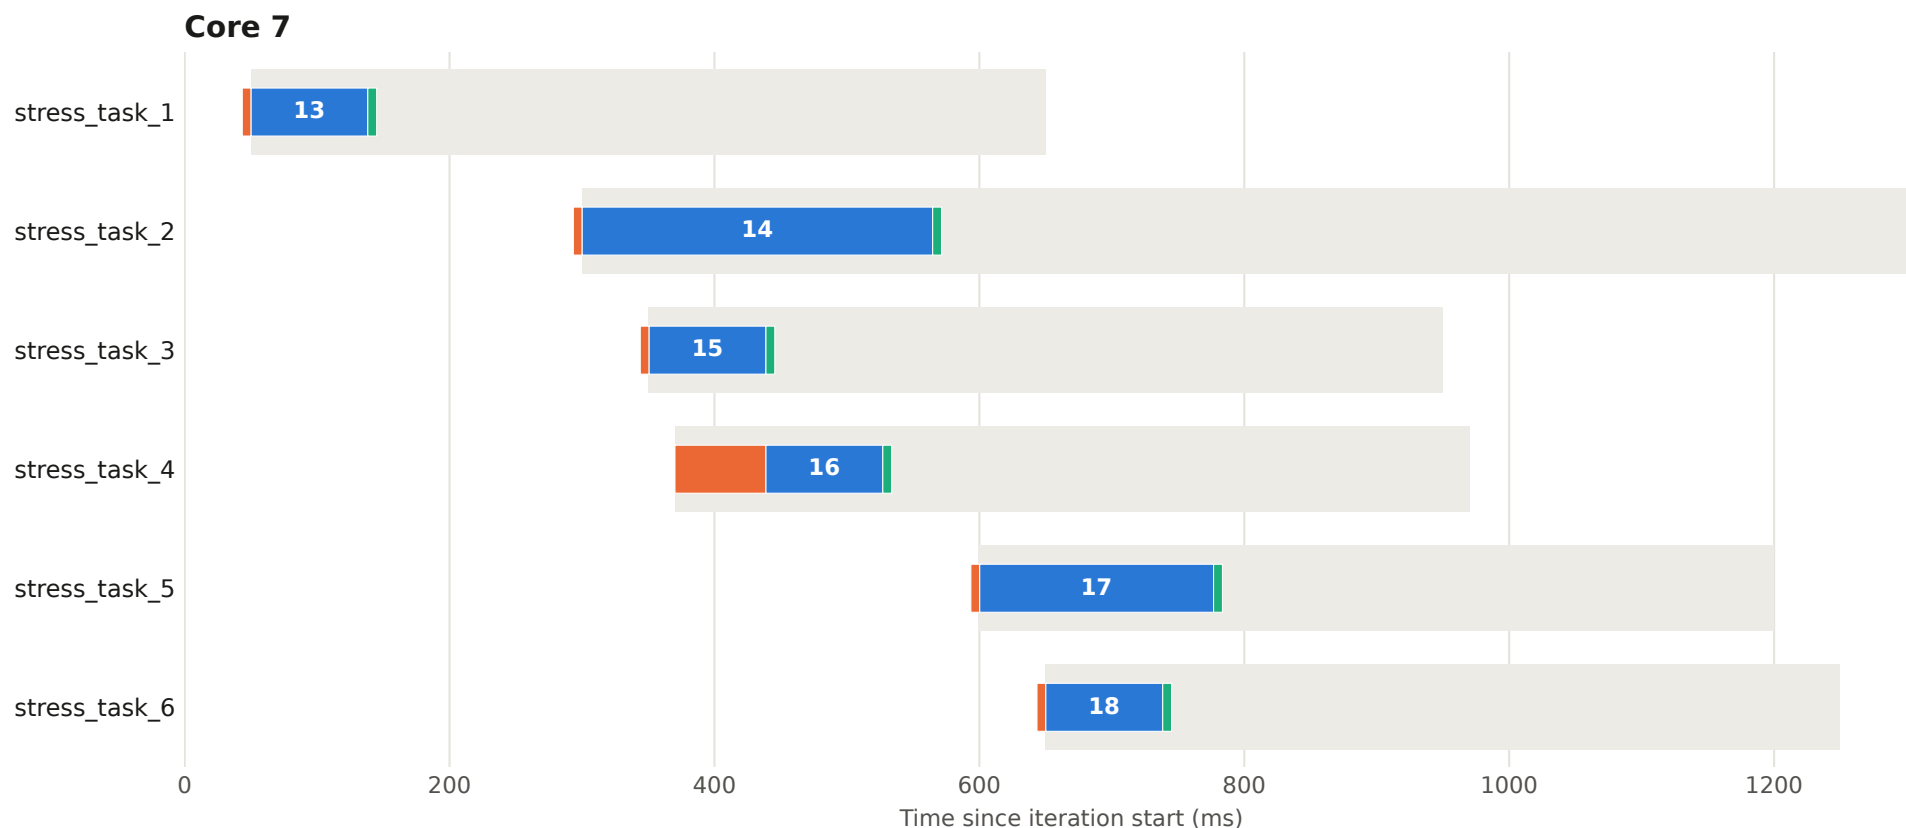


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 77 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

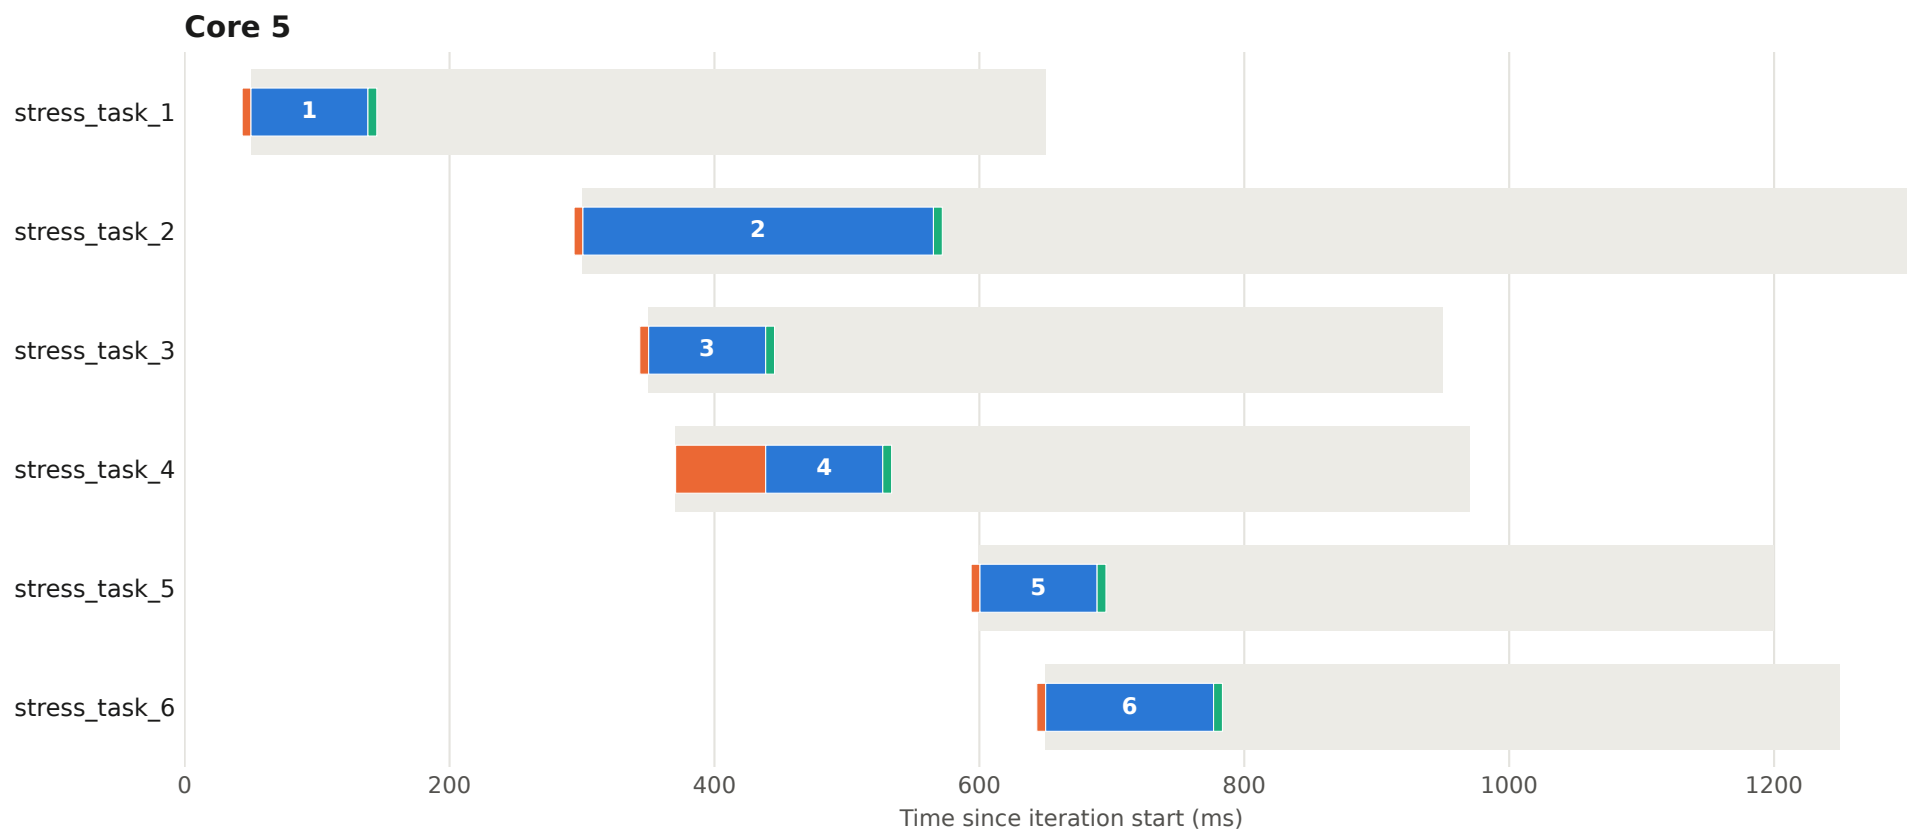


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 77 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

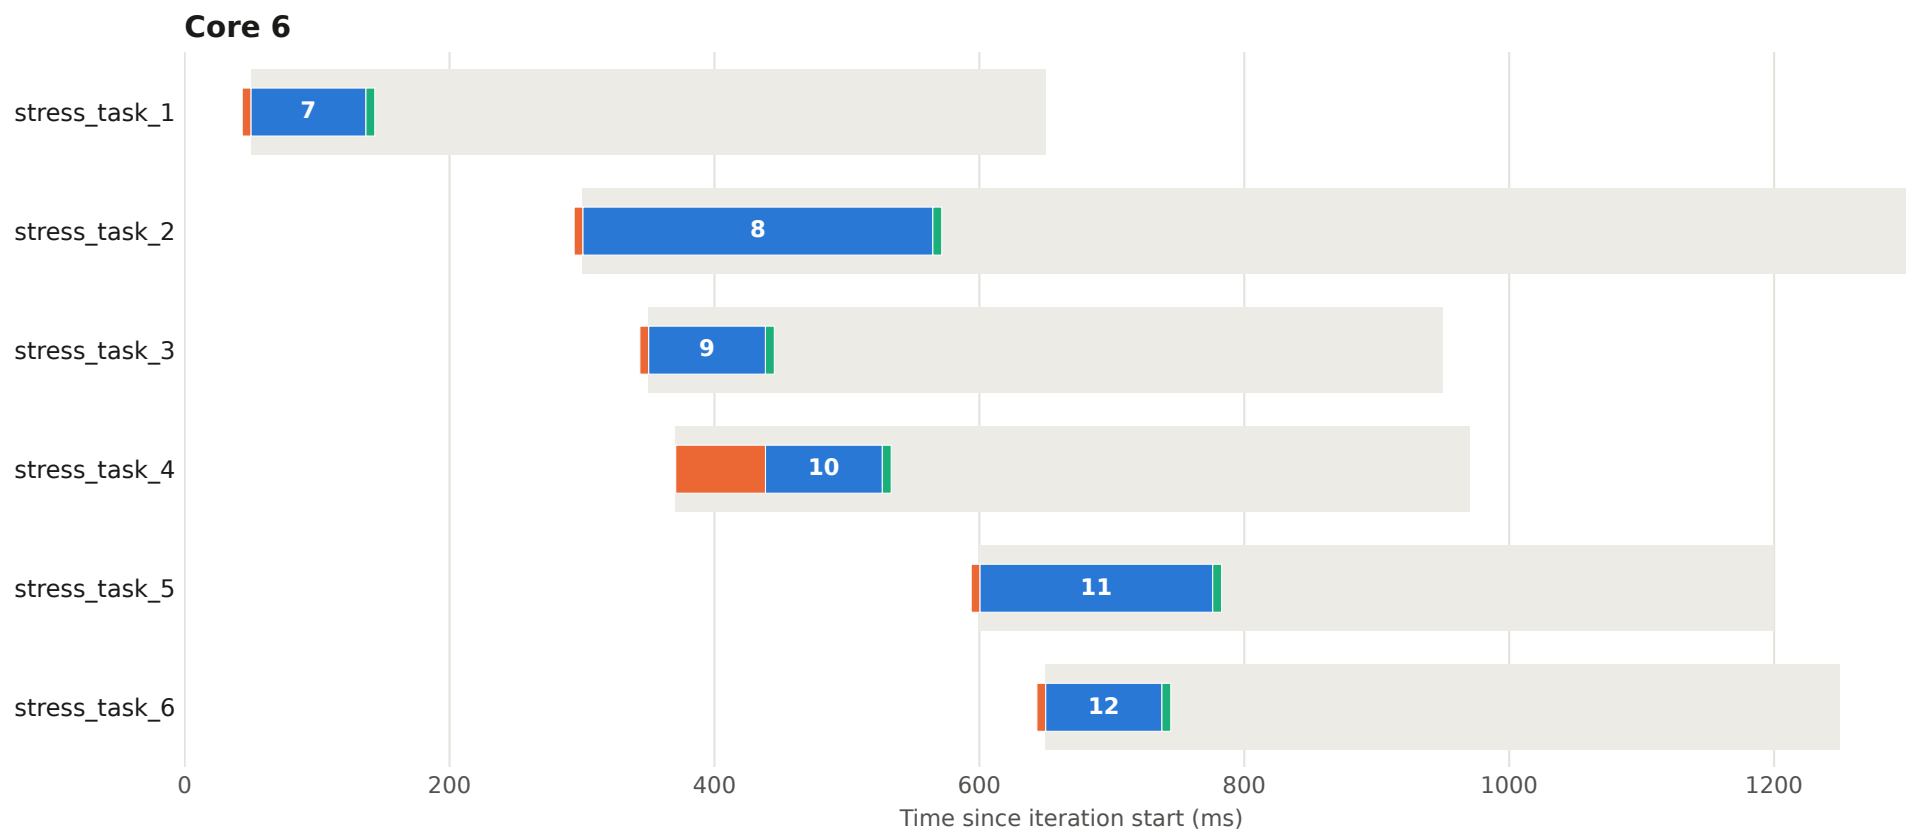


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 77 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

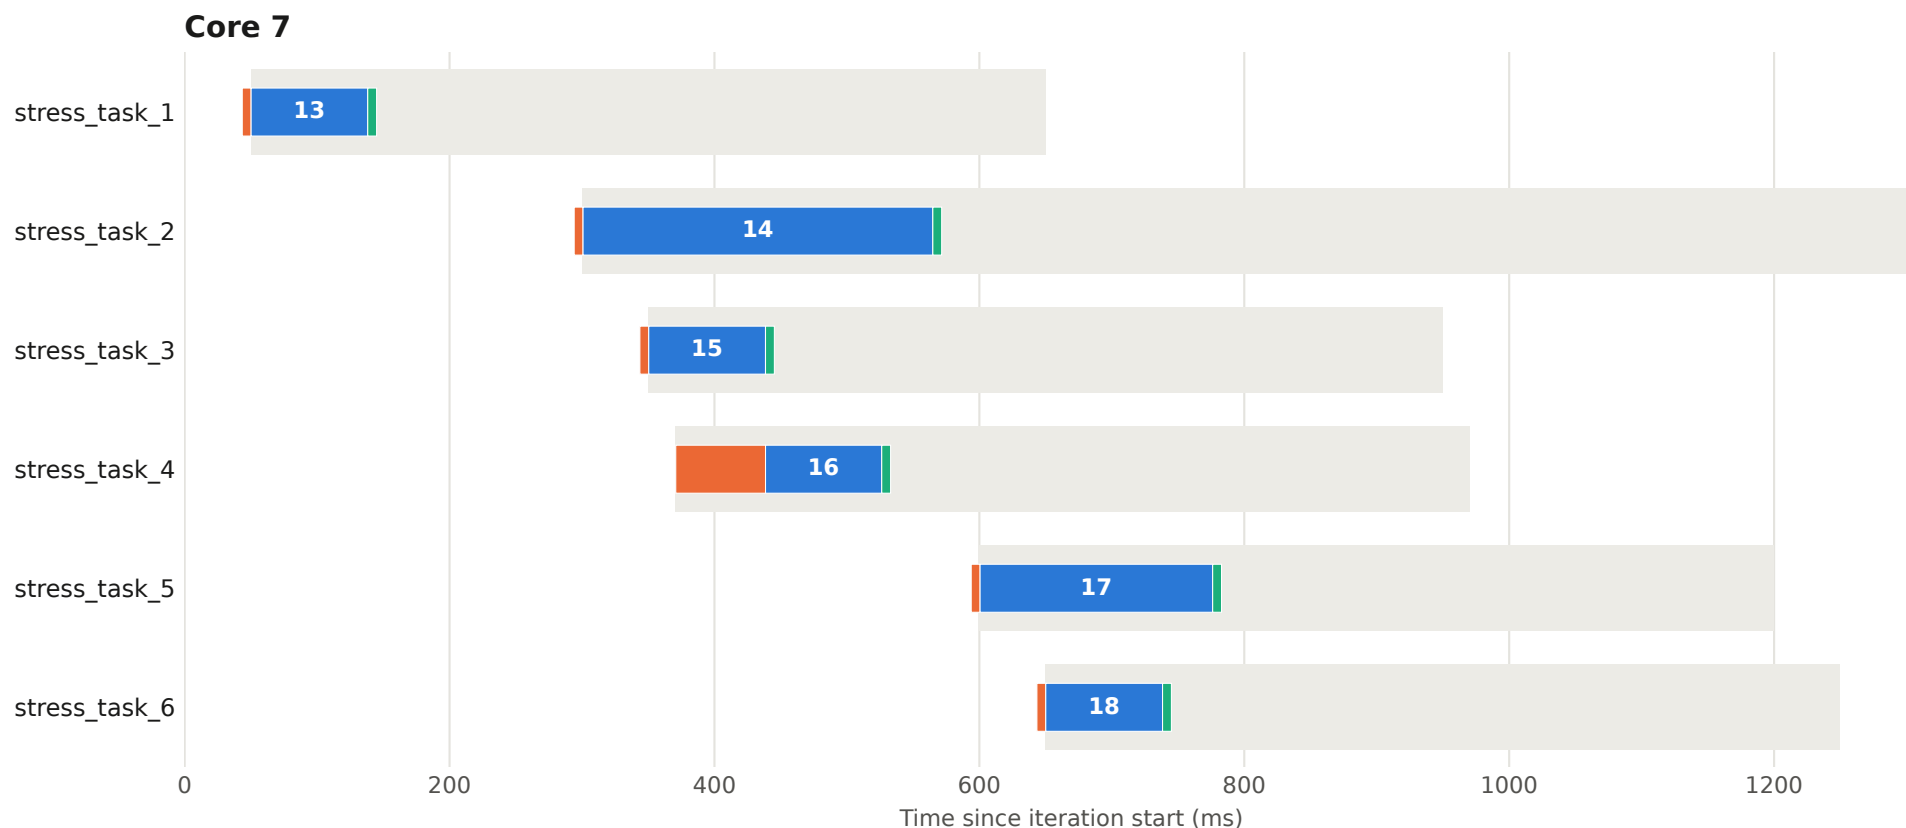


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 78 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

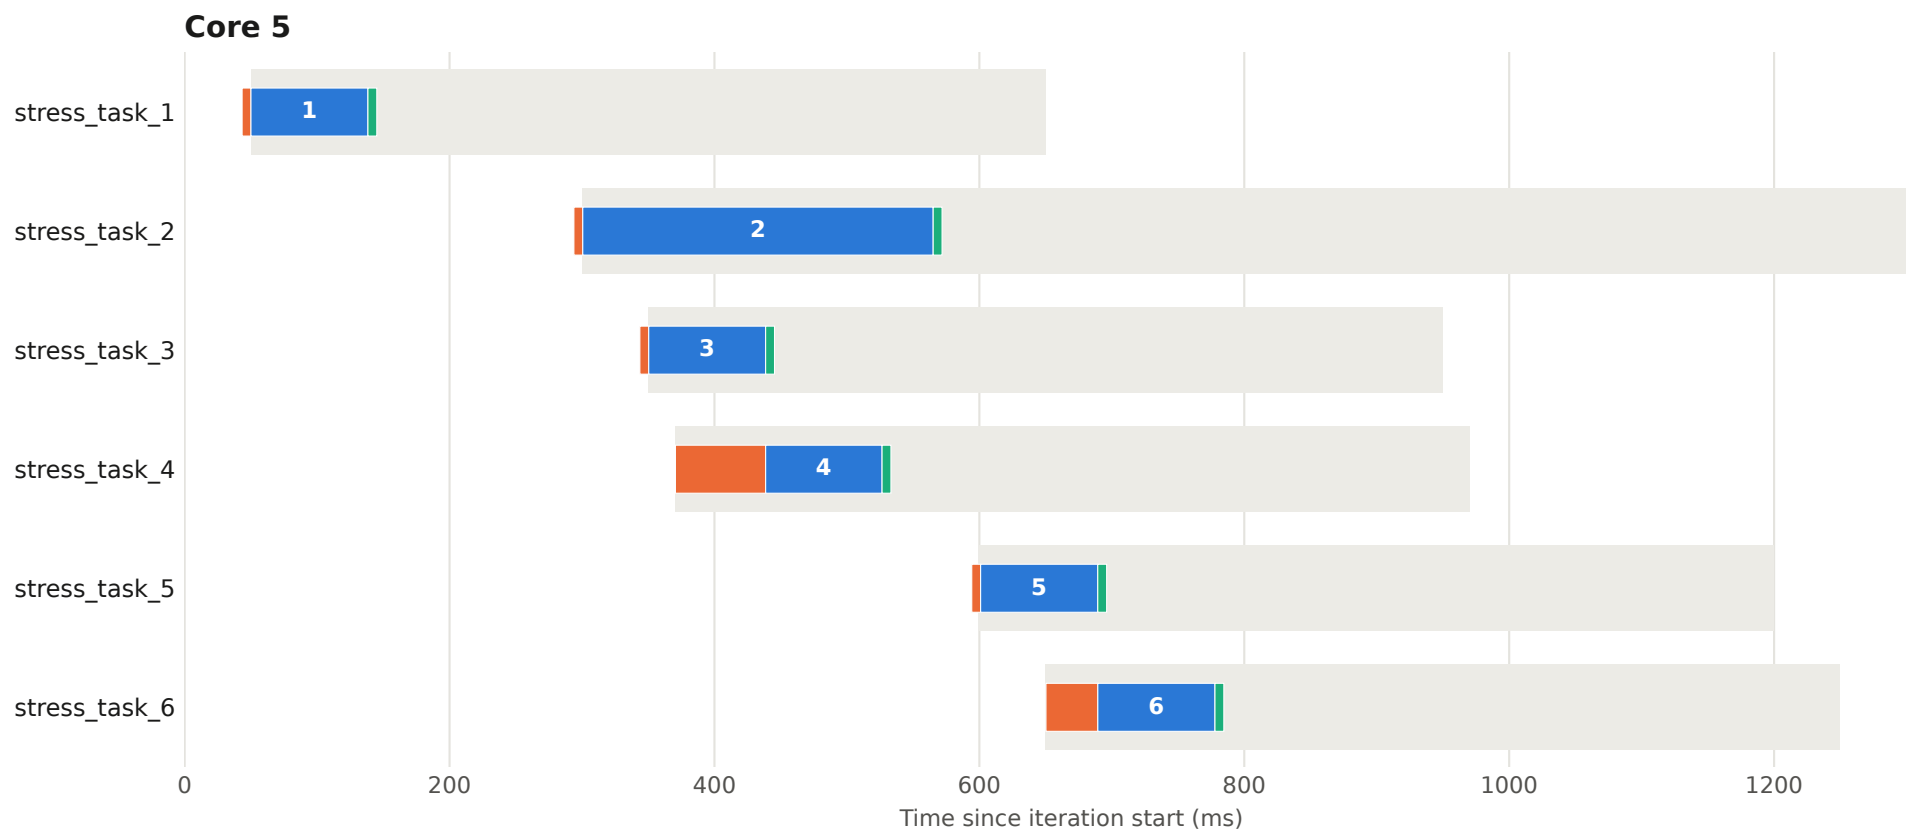


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 78 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

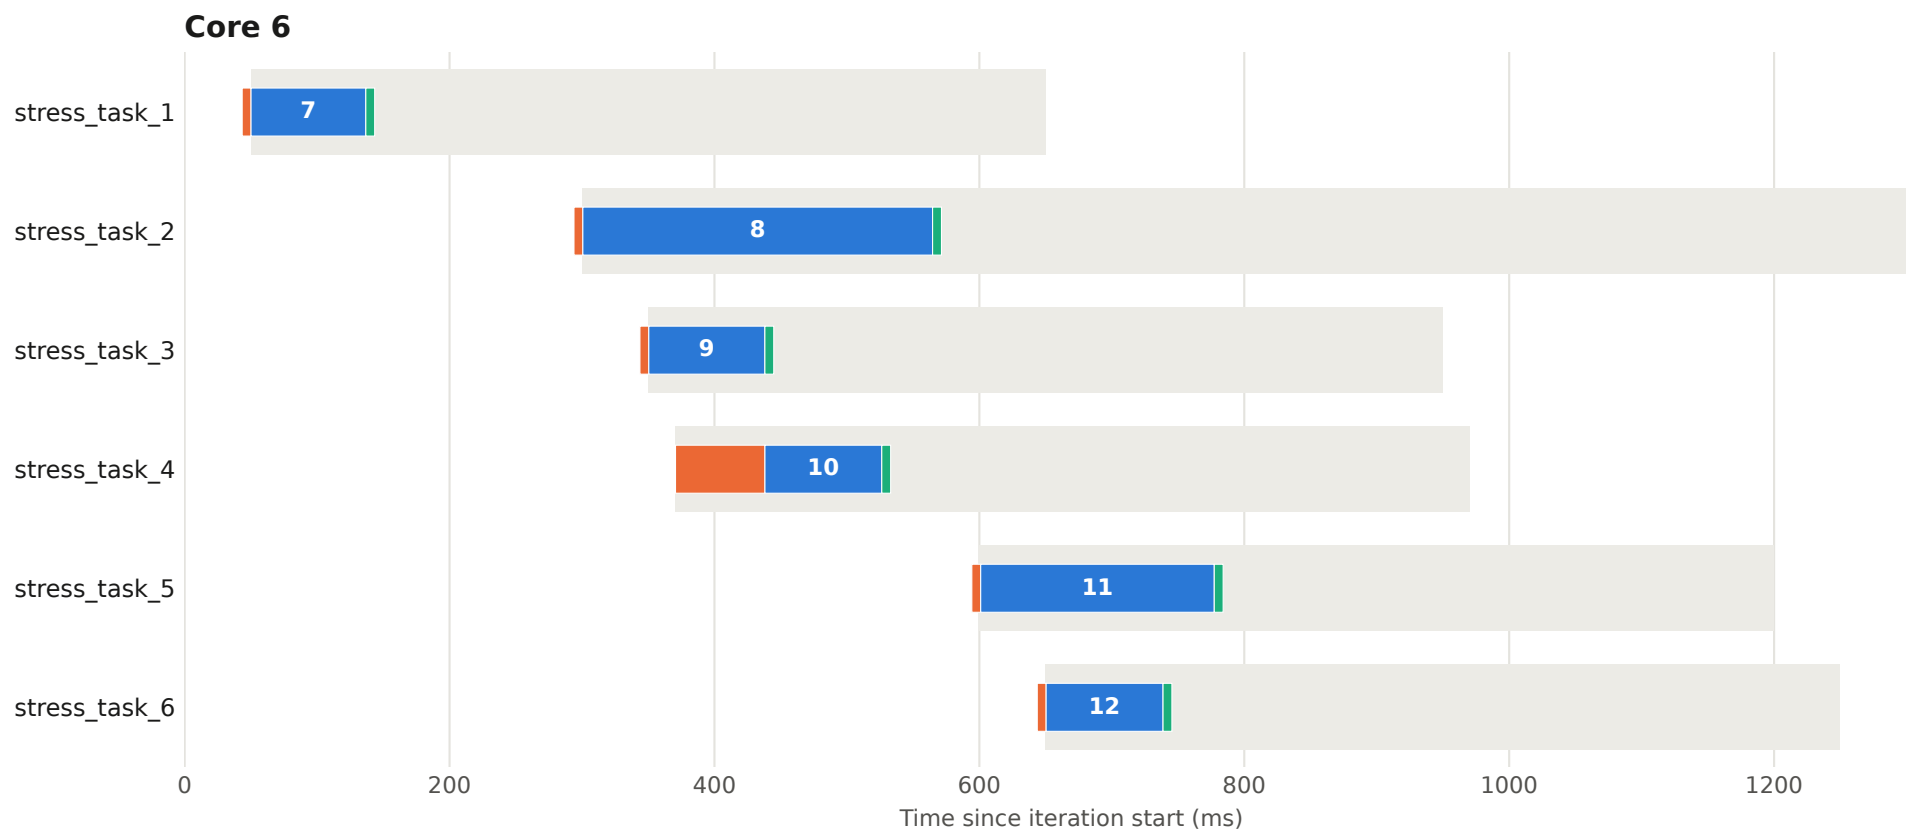


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 78 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

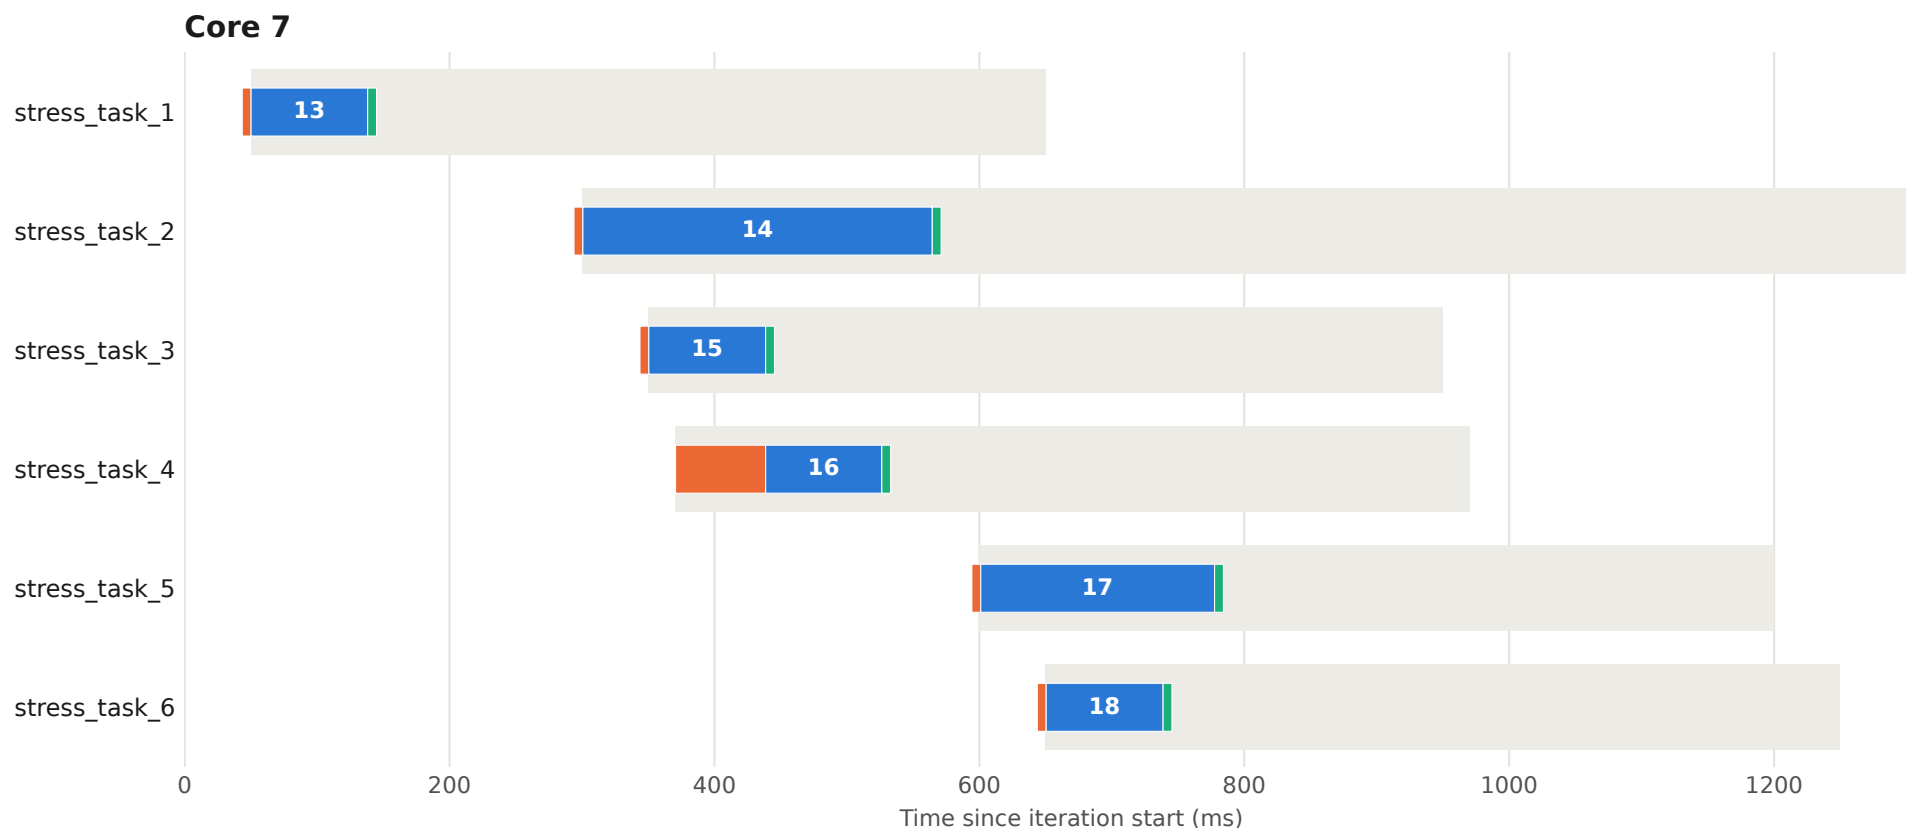


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 79 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

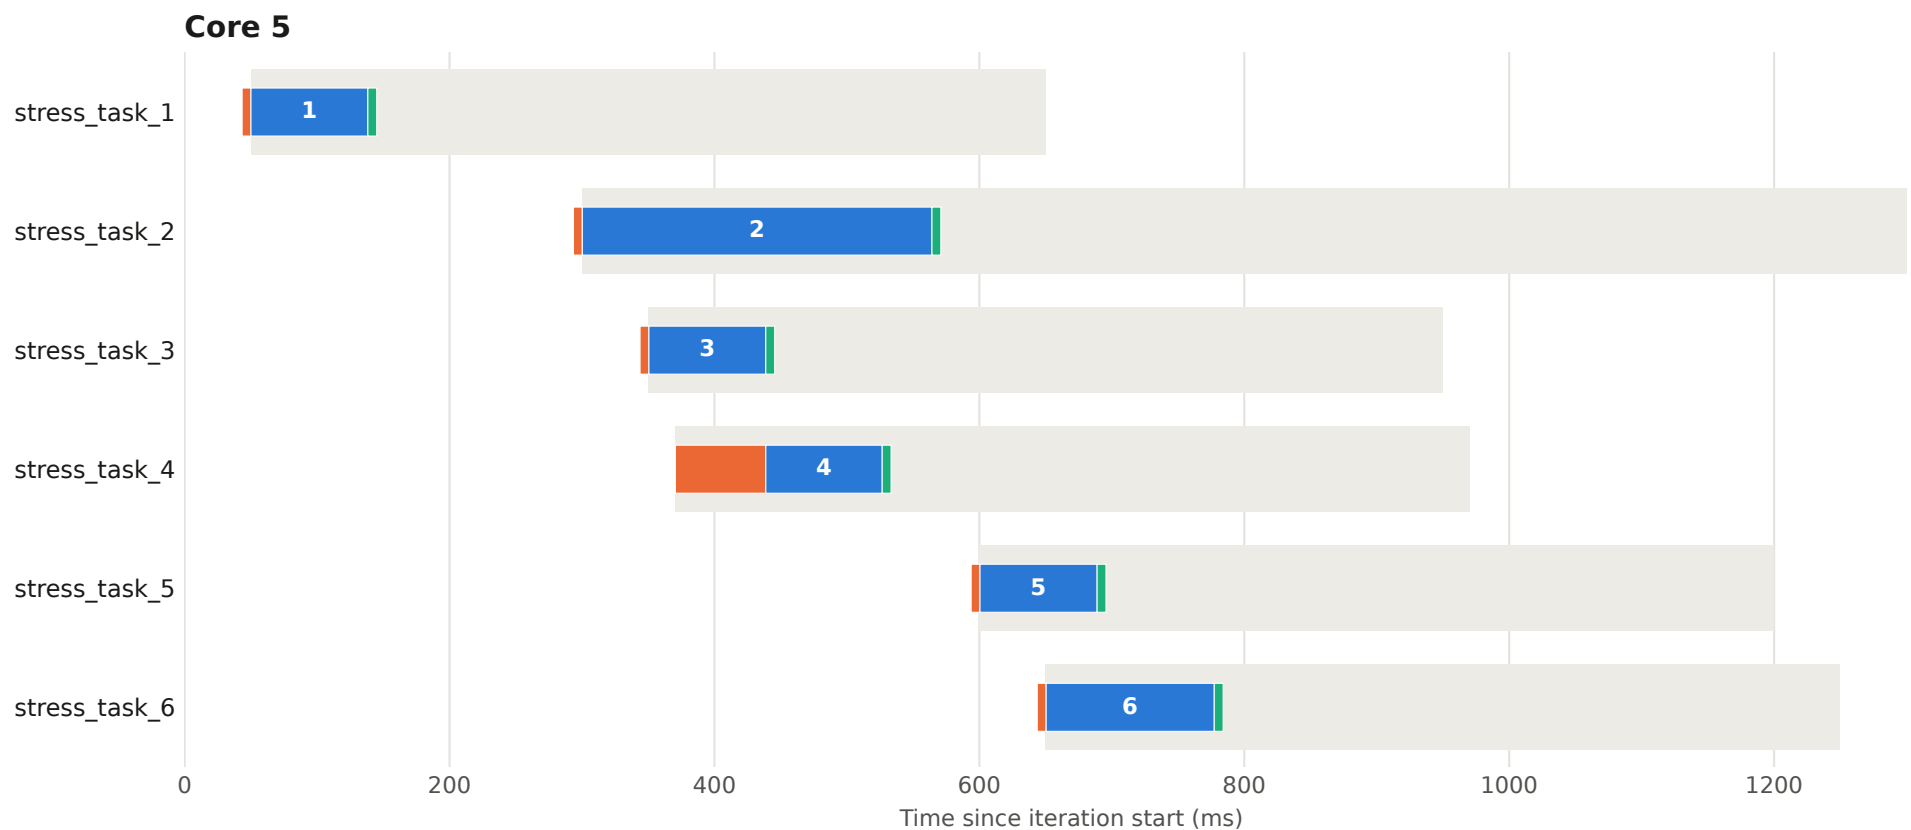


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 79 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

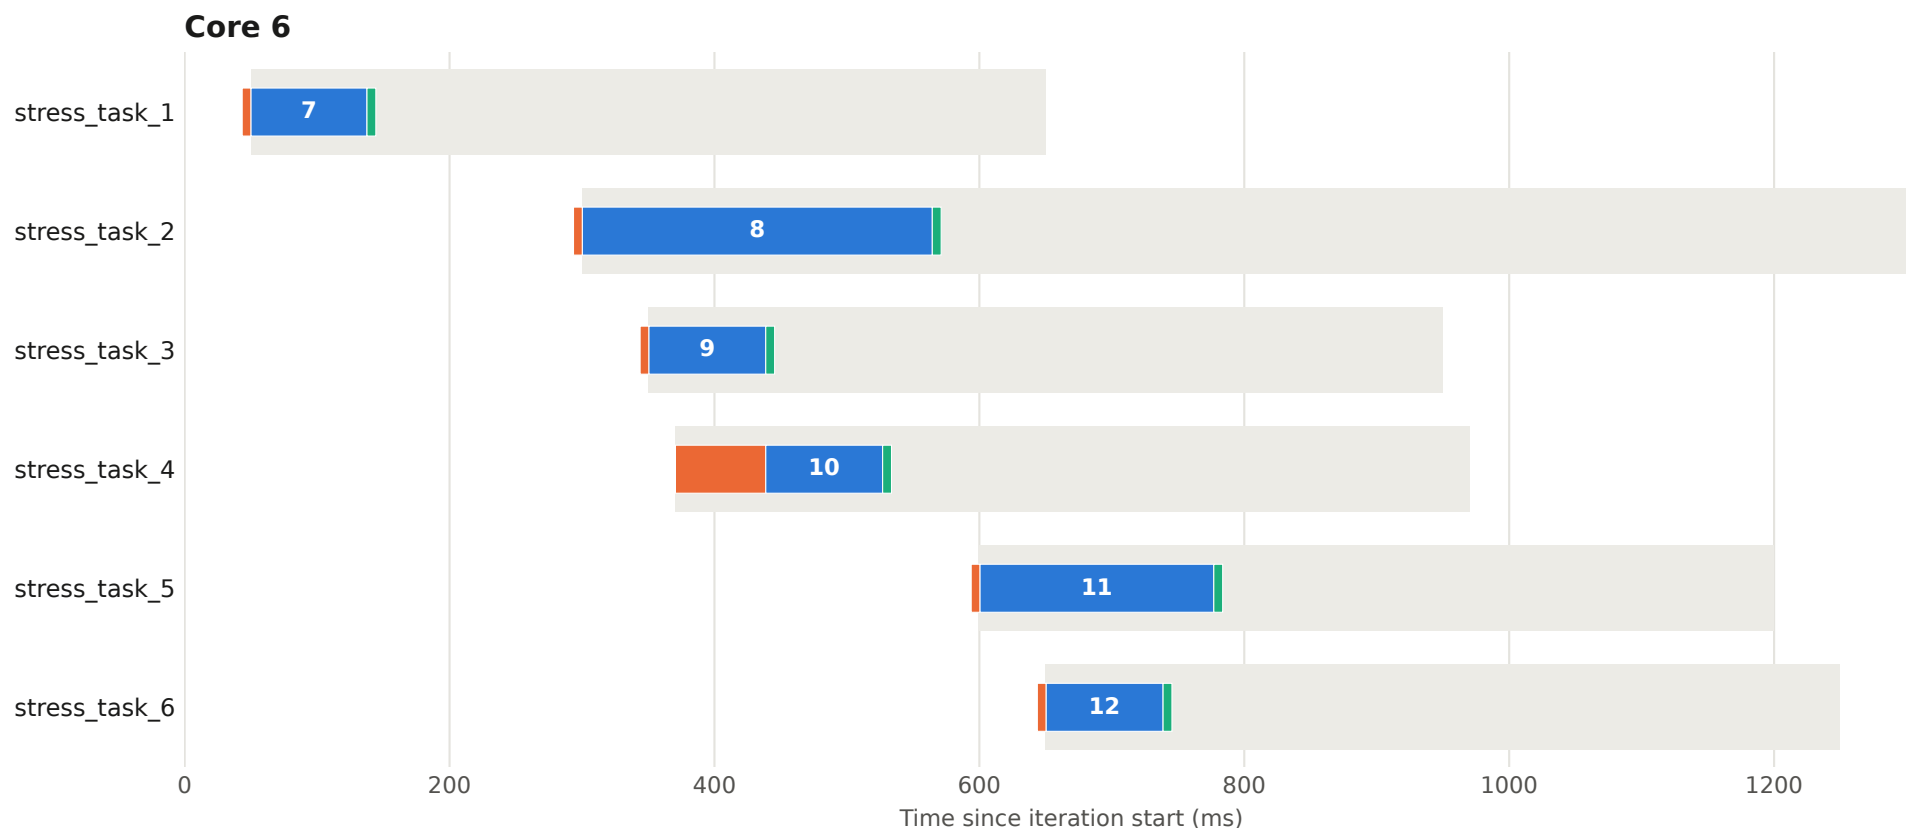


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 79 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

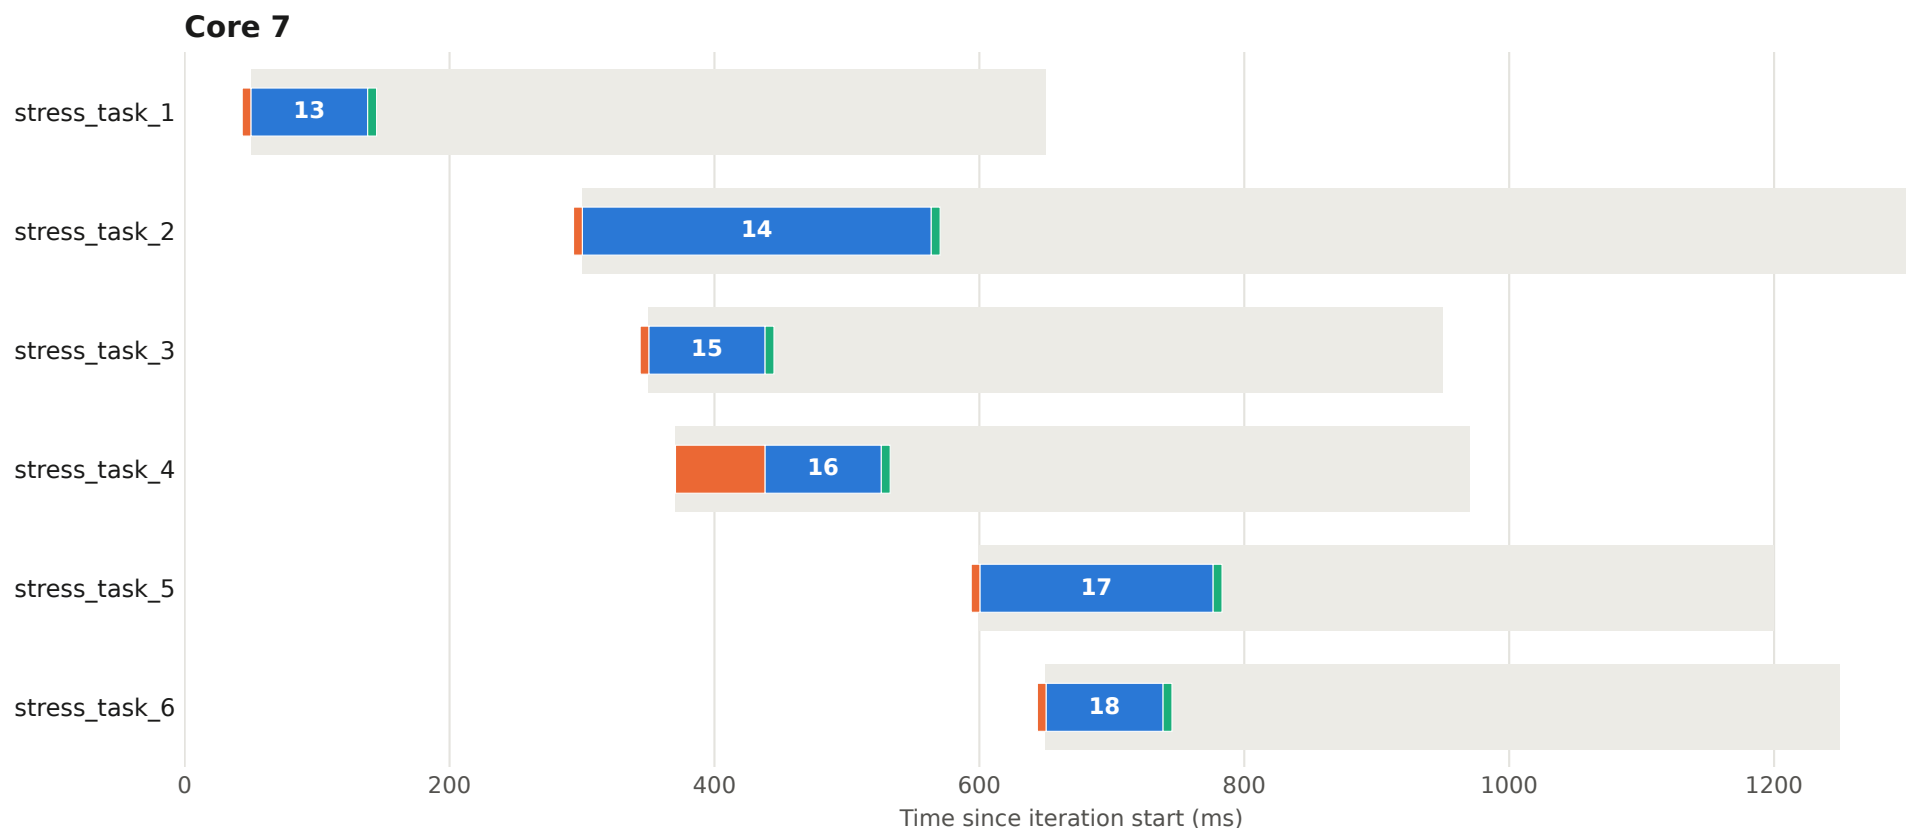


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 80 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

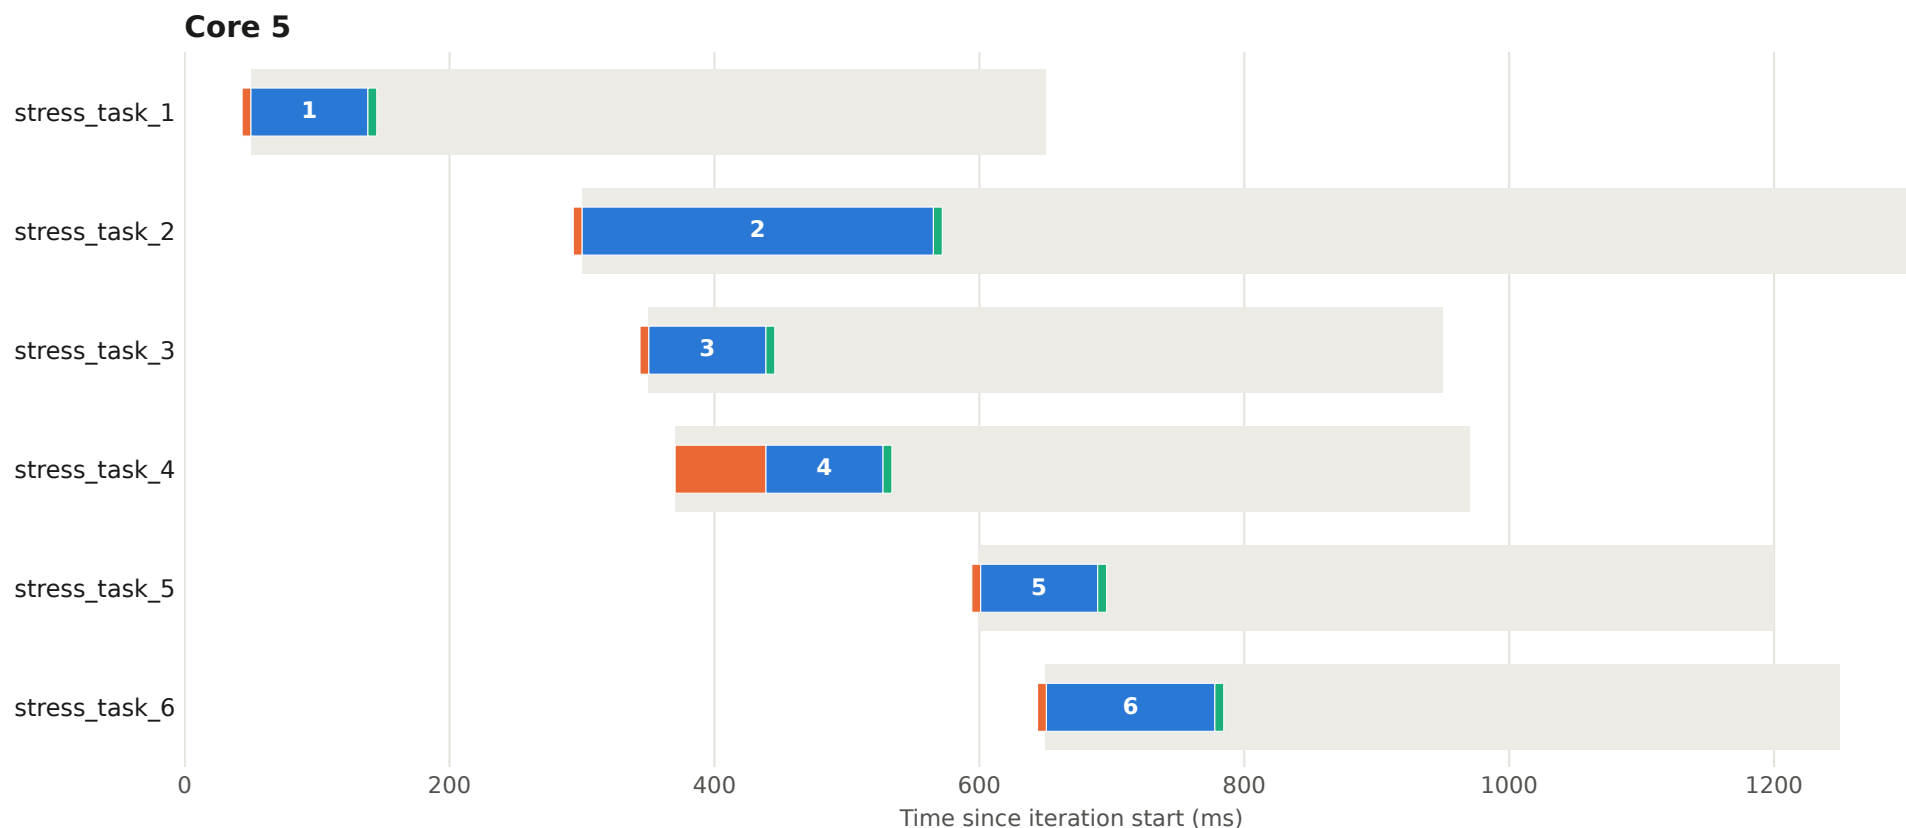


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 80 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

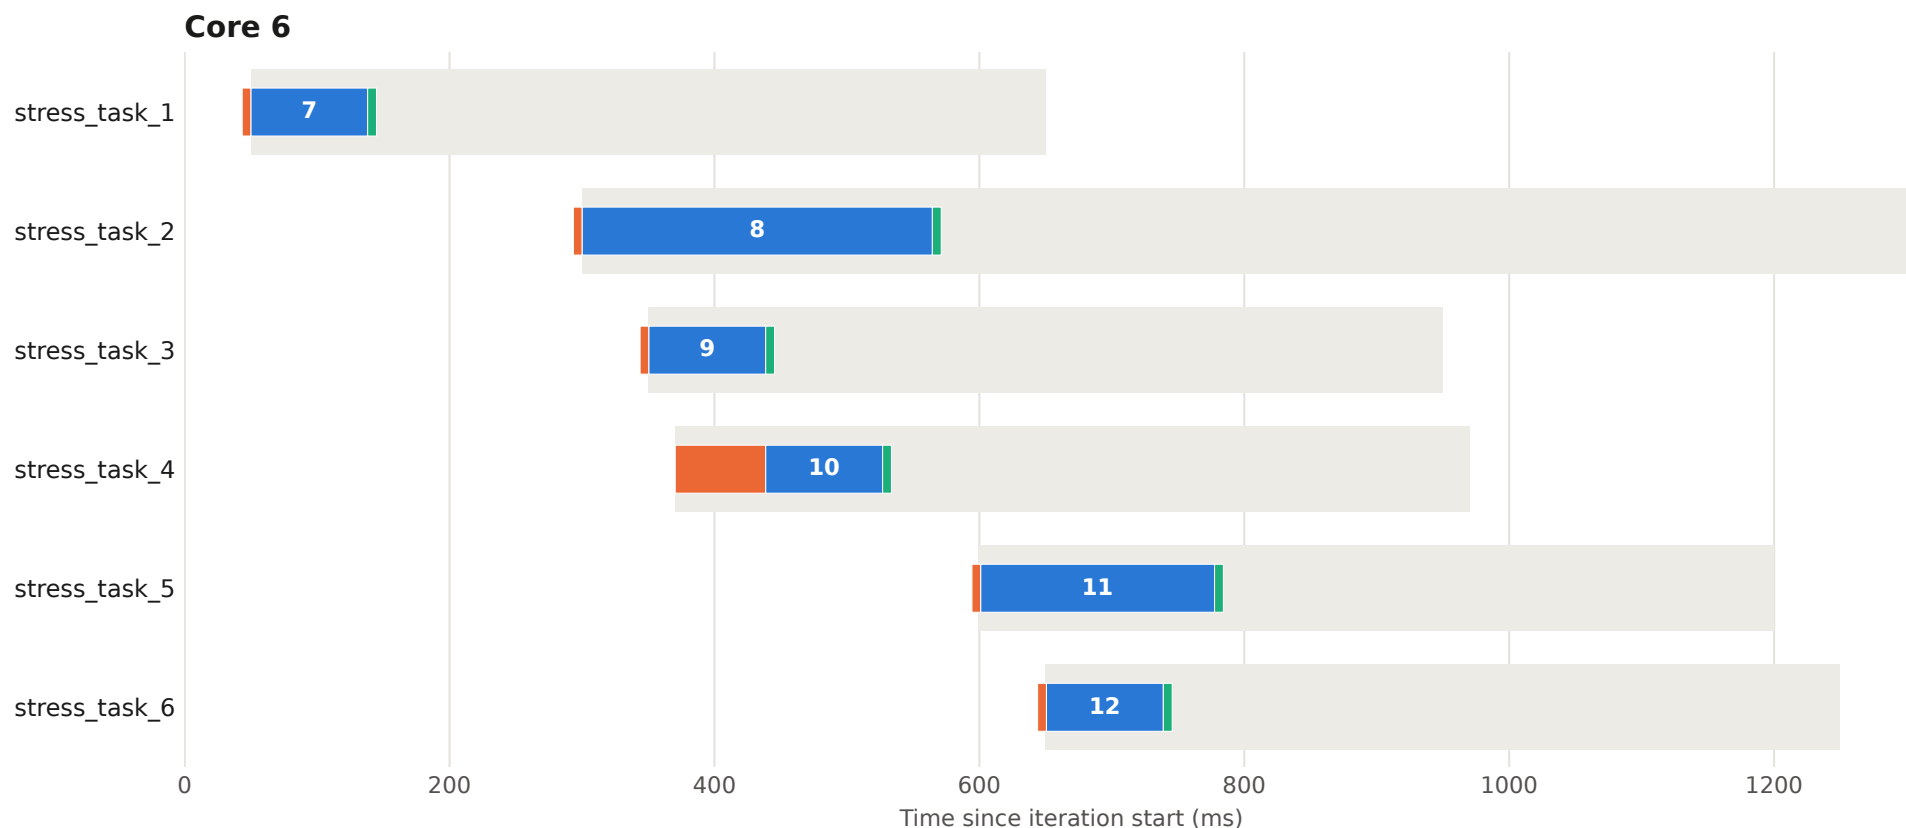


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 80 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

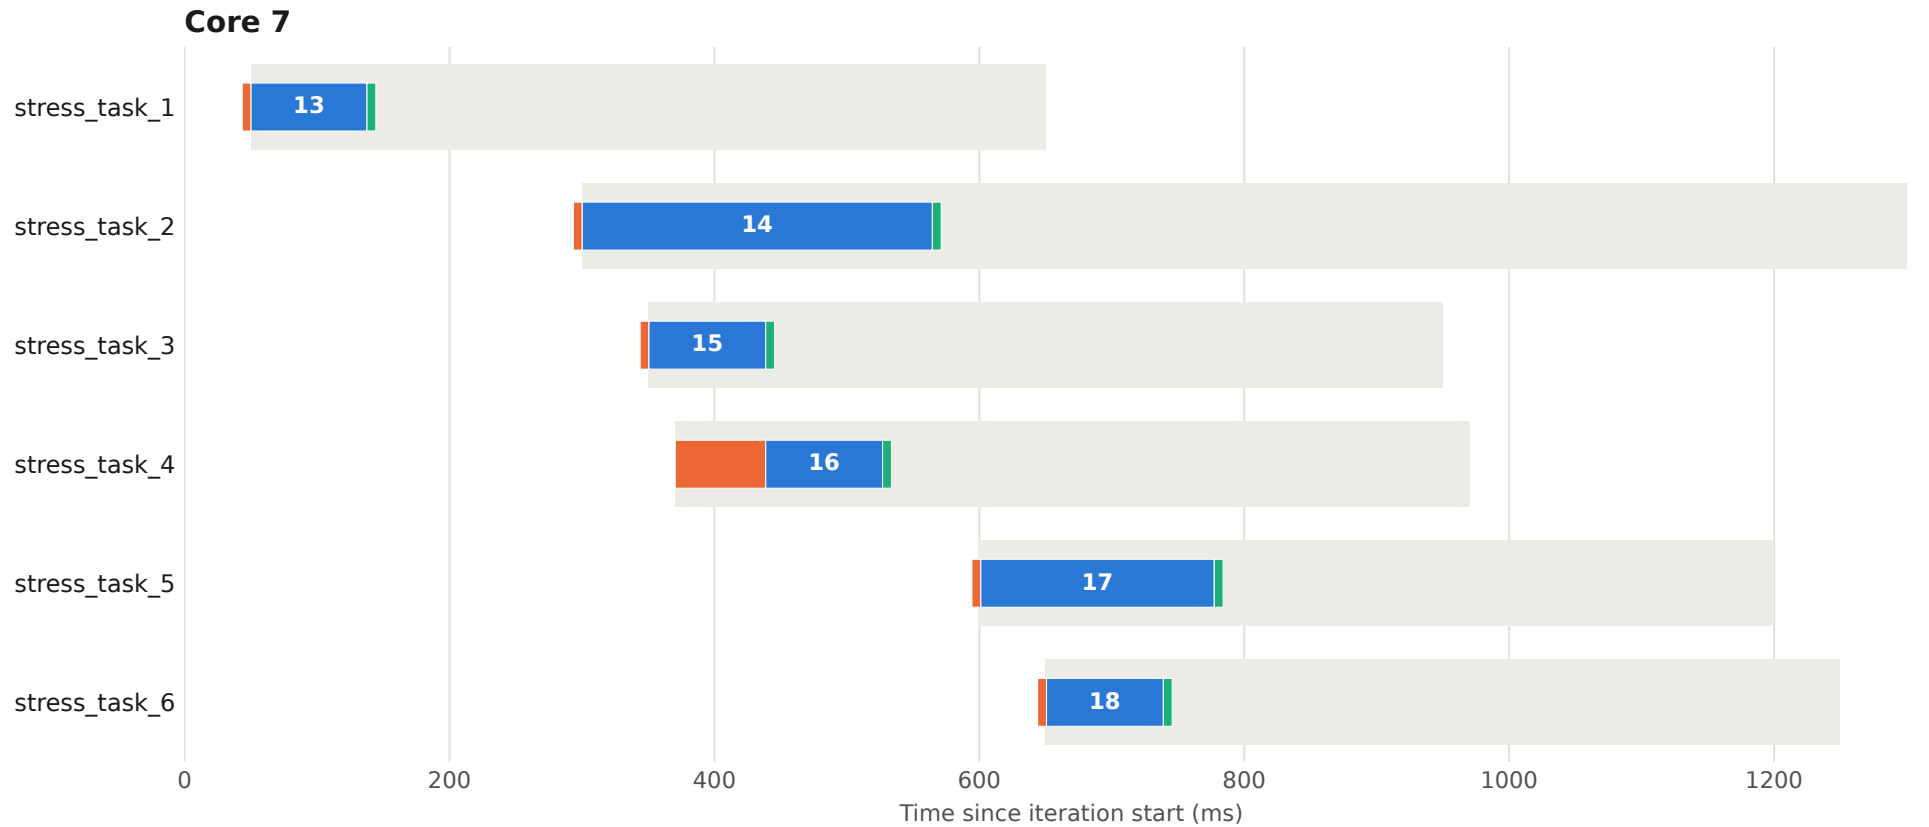


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 81 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

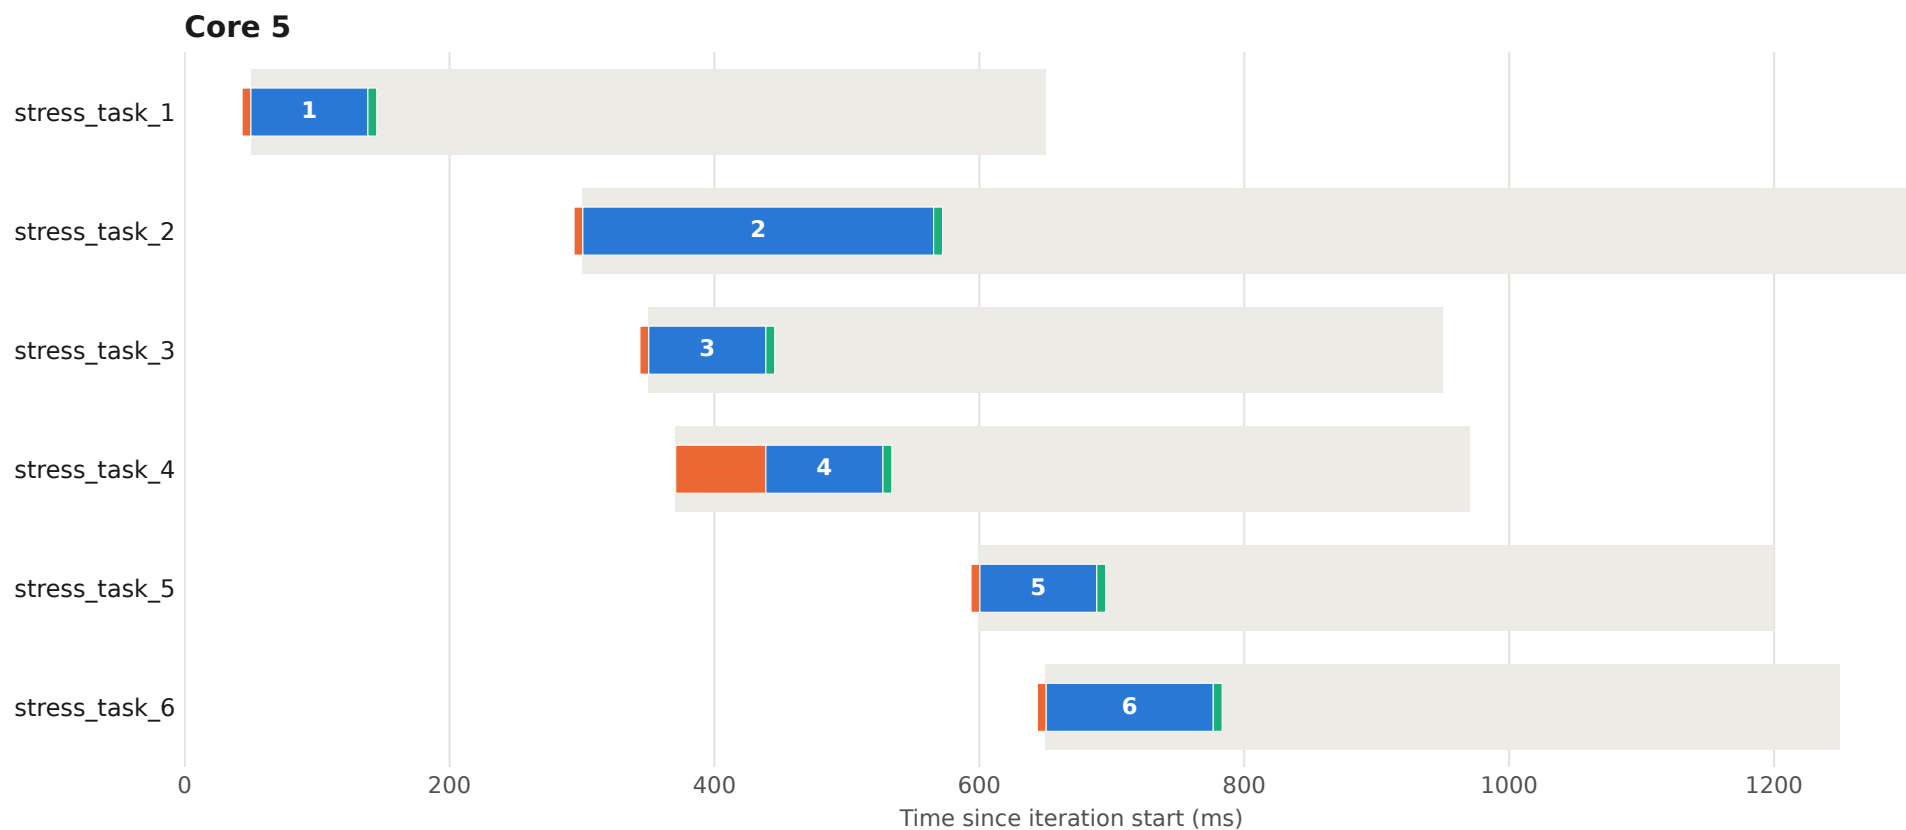


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 81 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

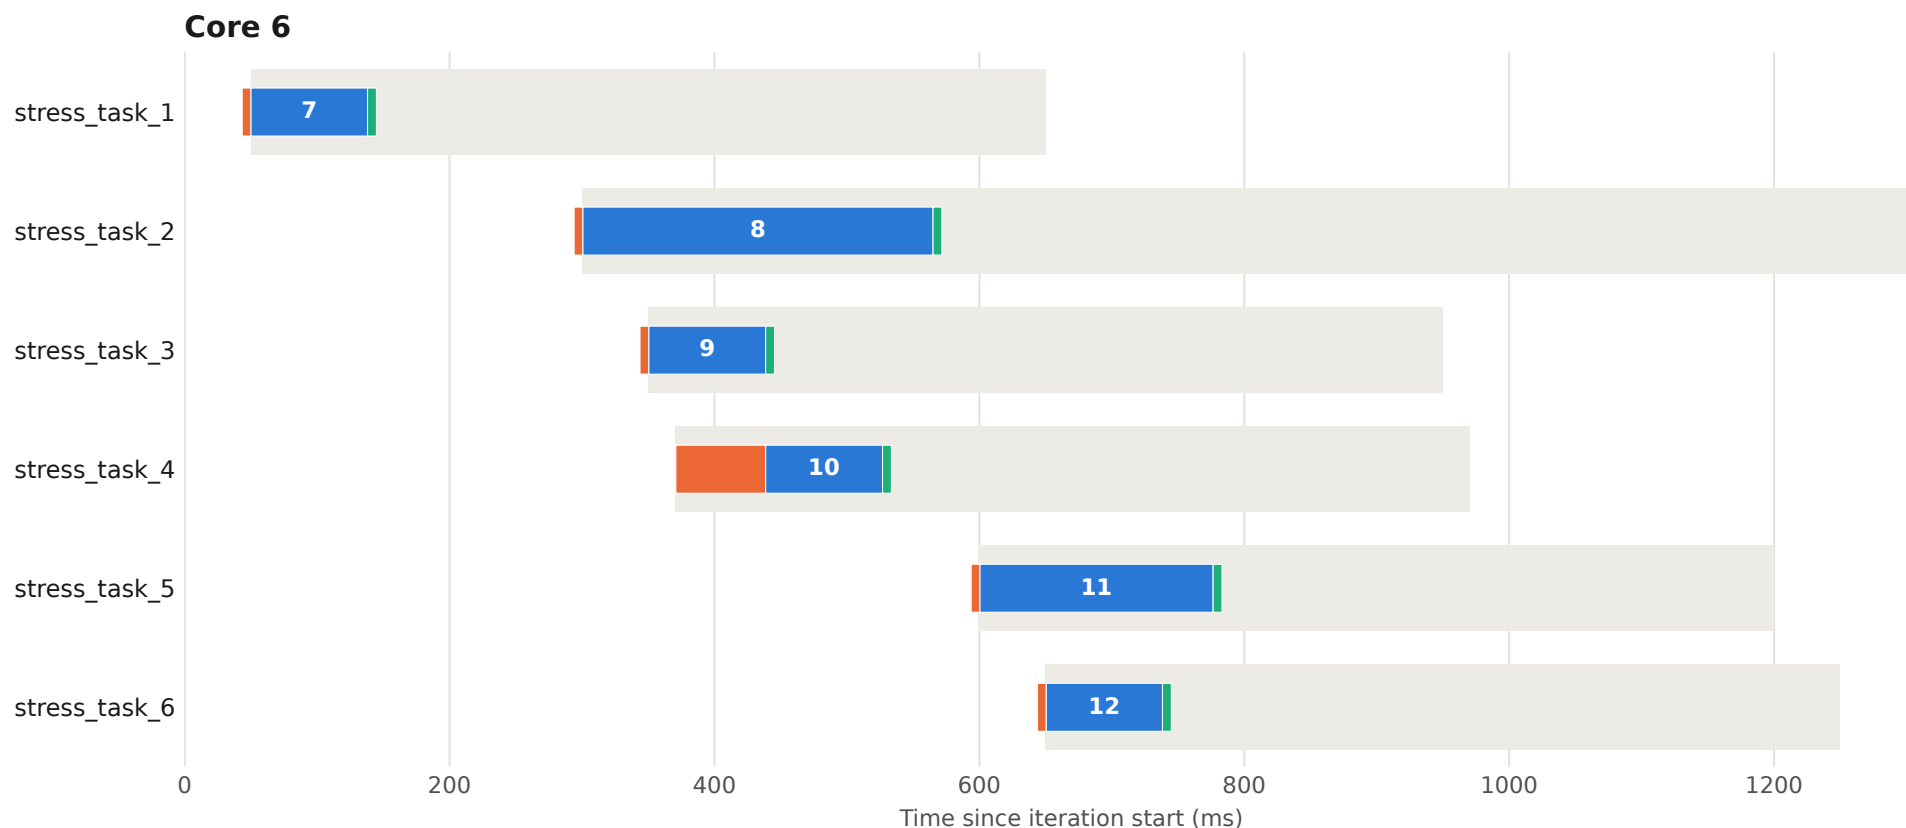


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 81 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

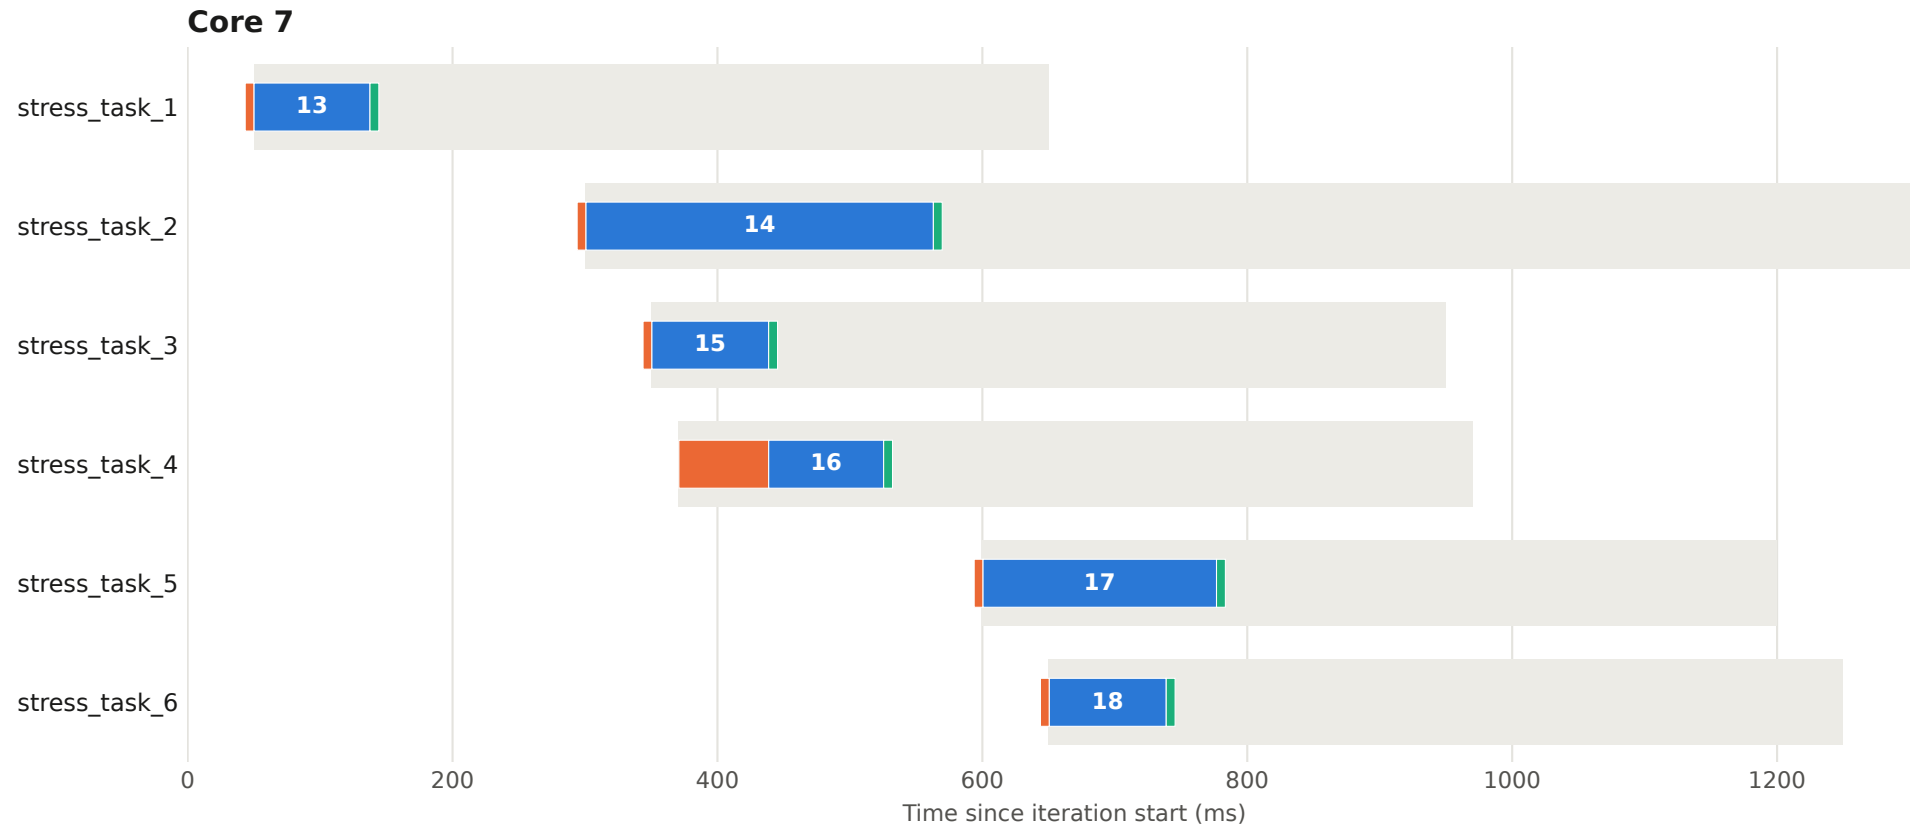


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 82 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

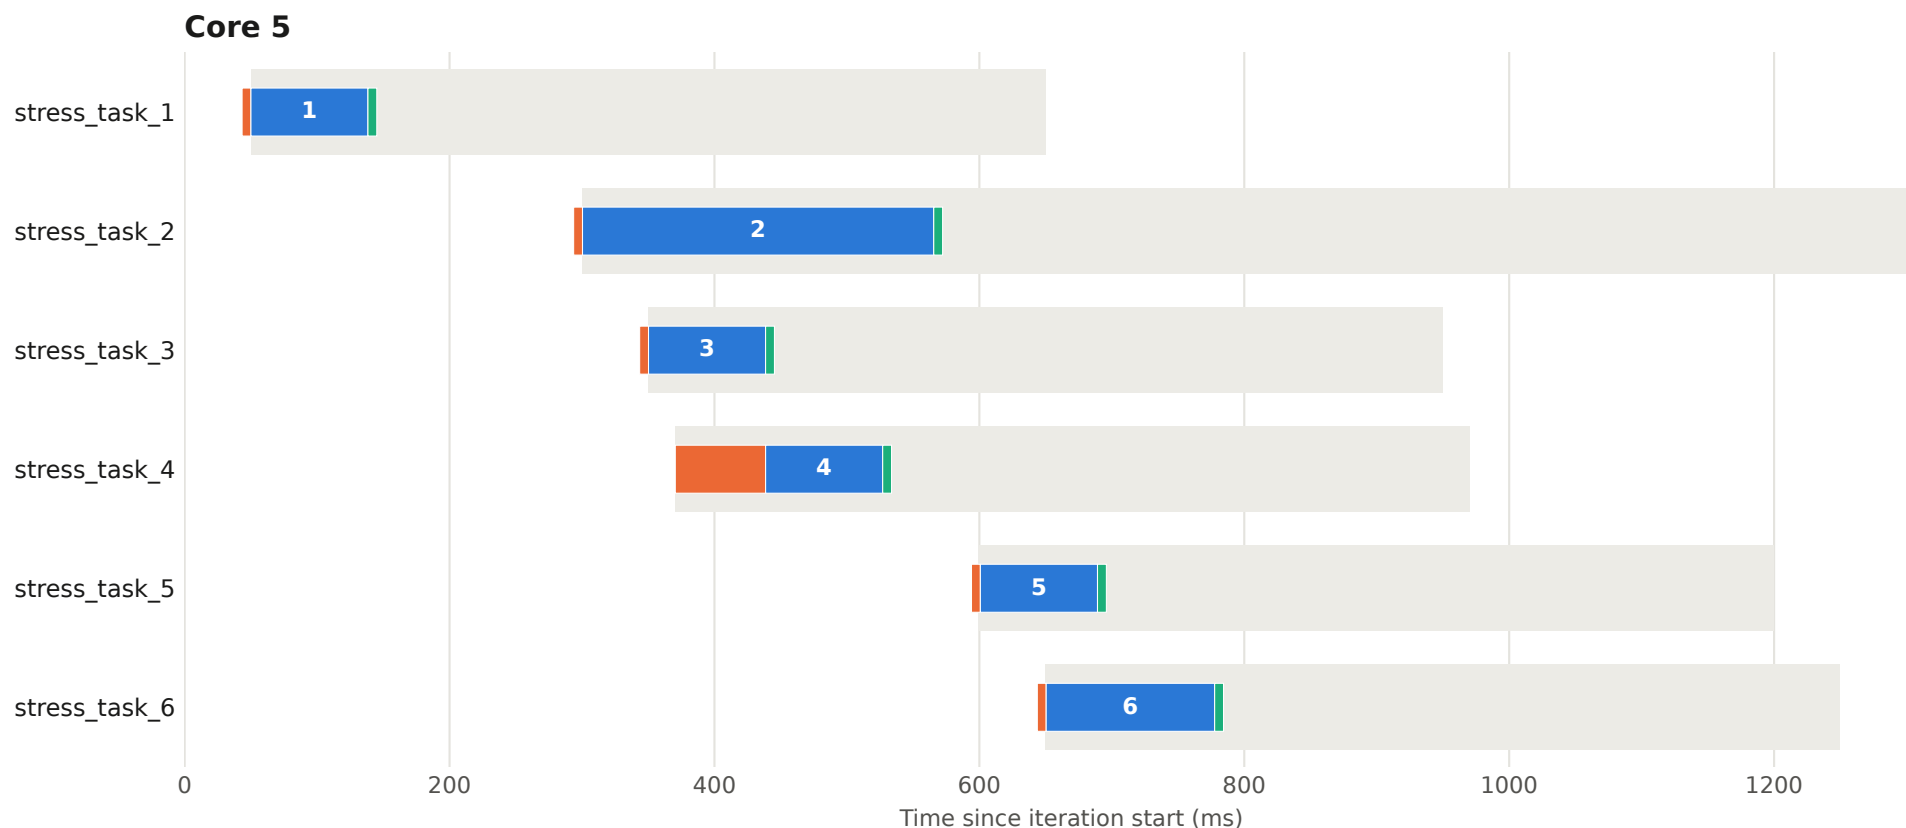


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 82 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

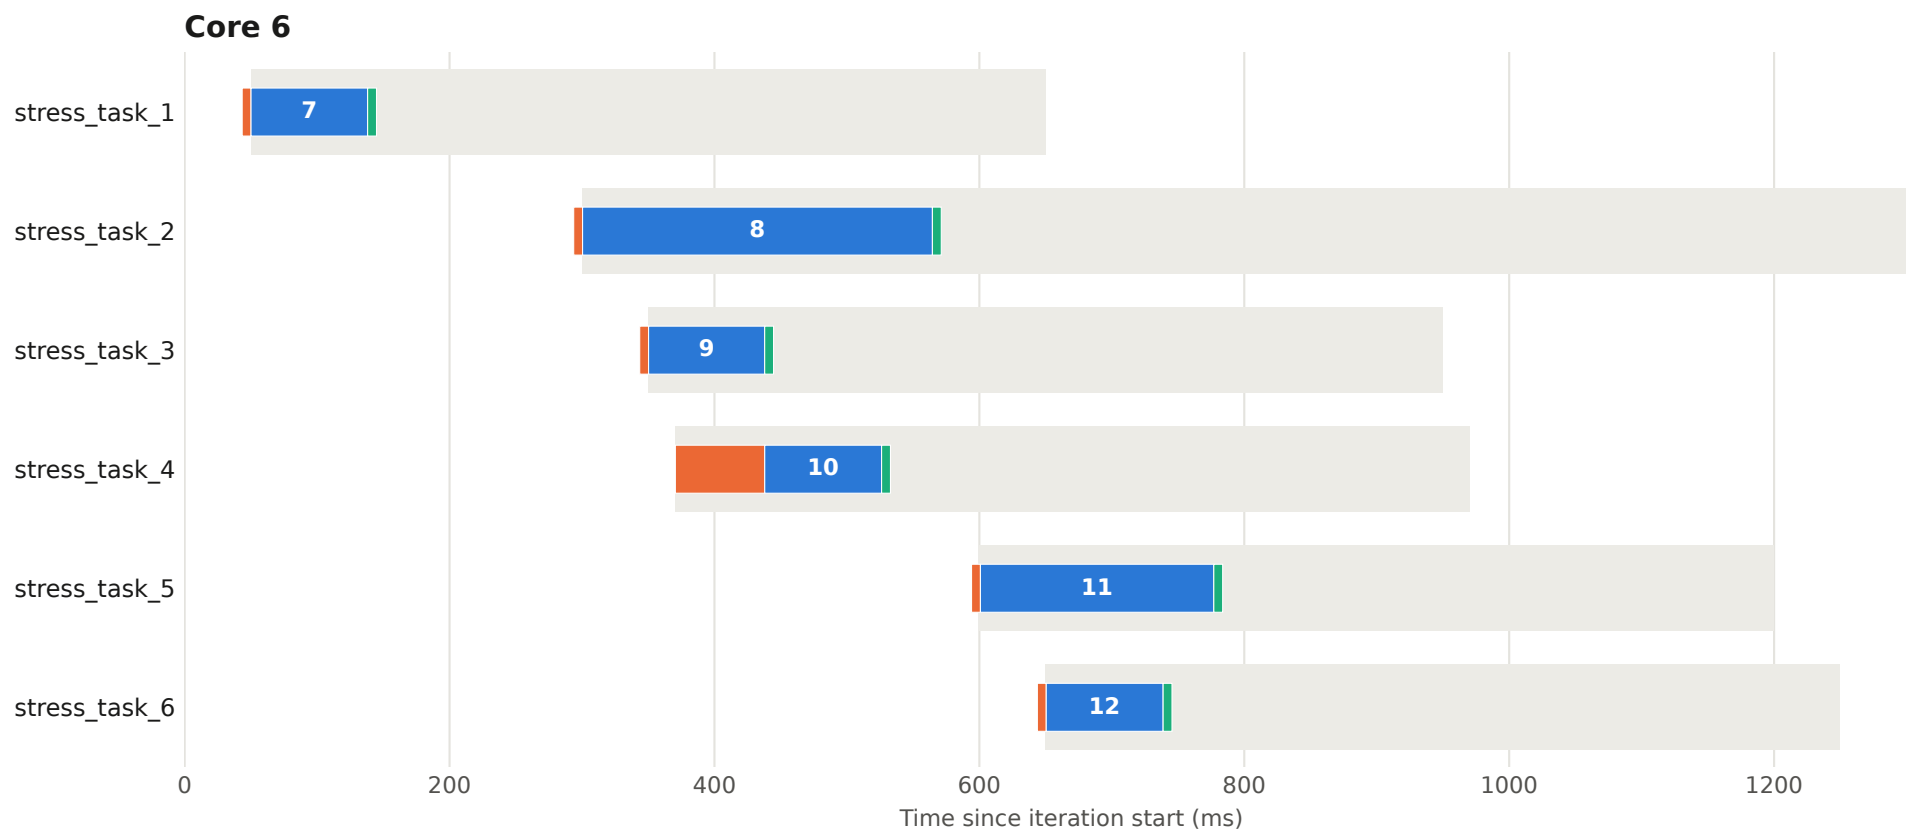


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 82 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

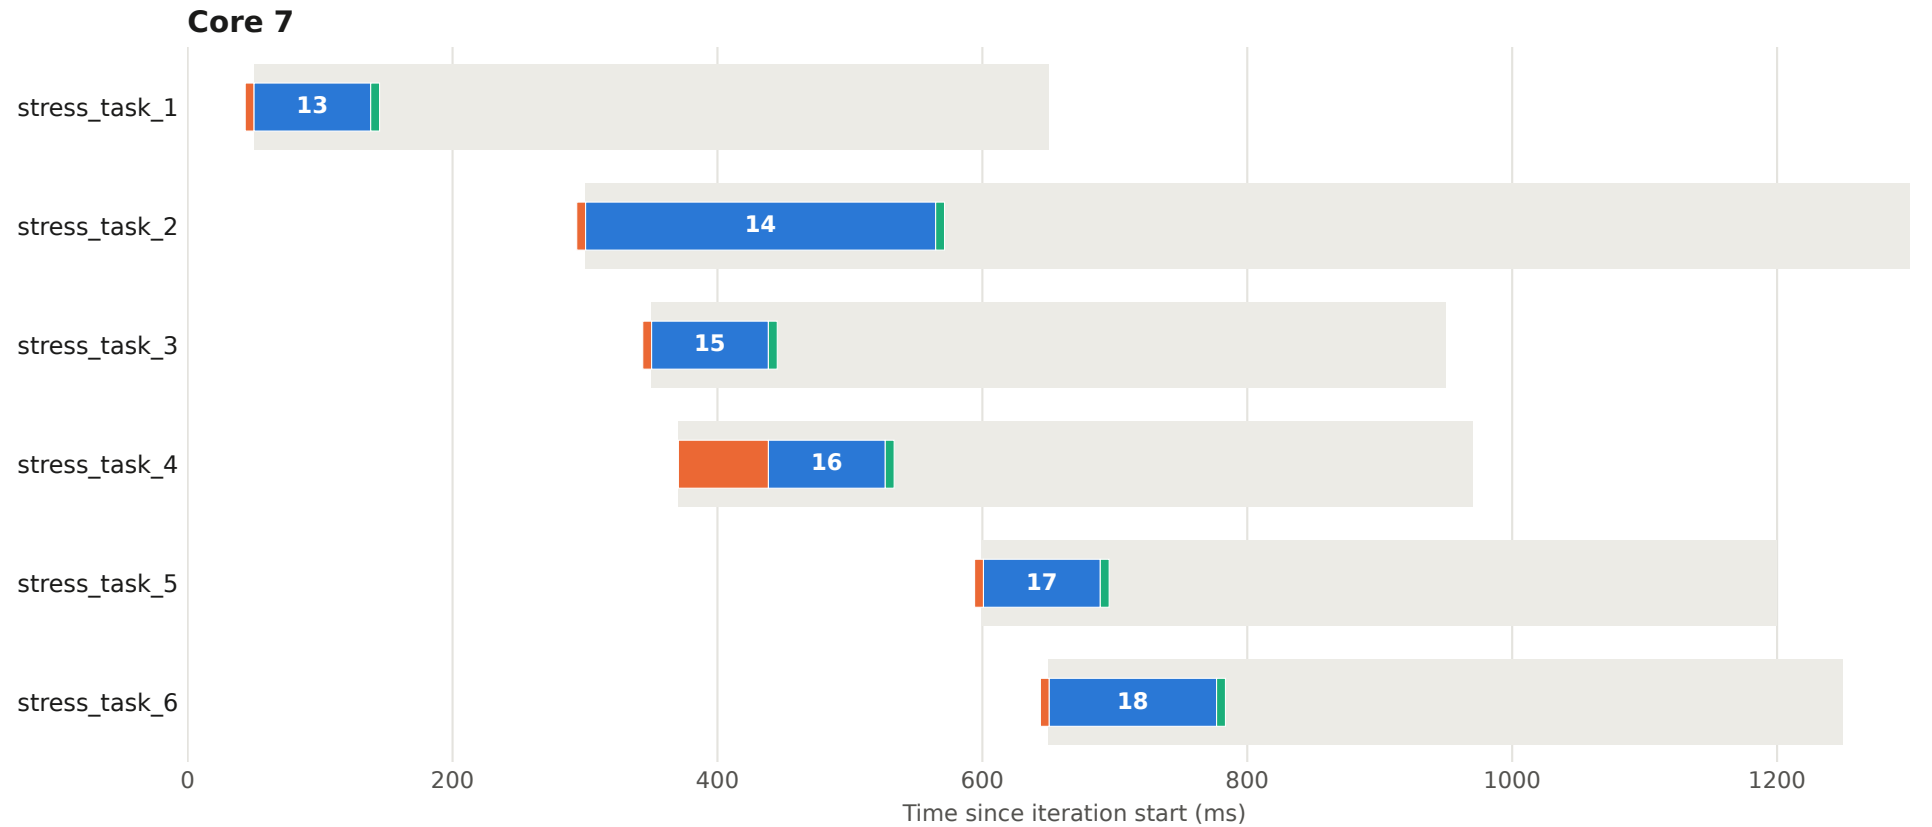


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 83 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

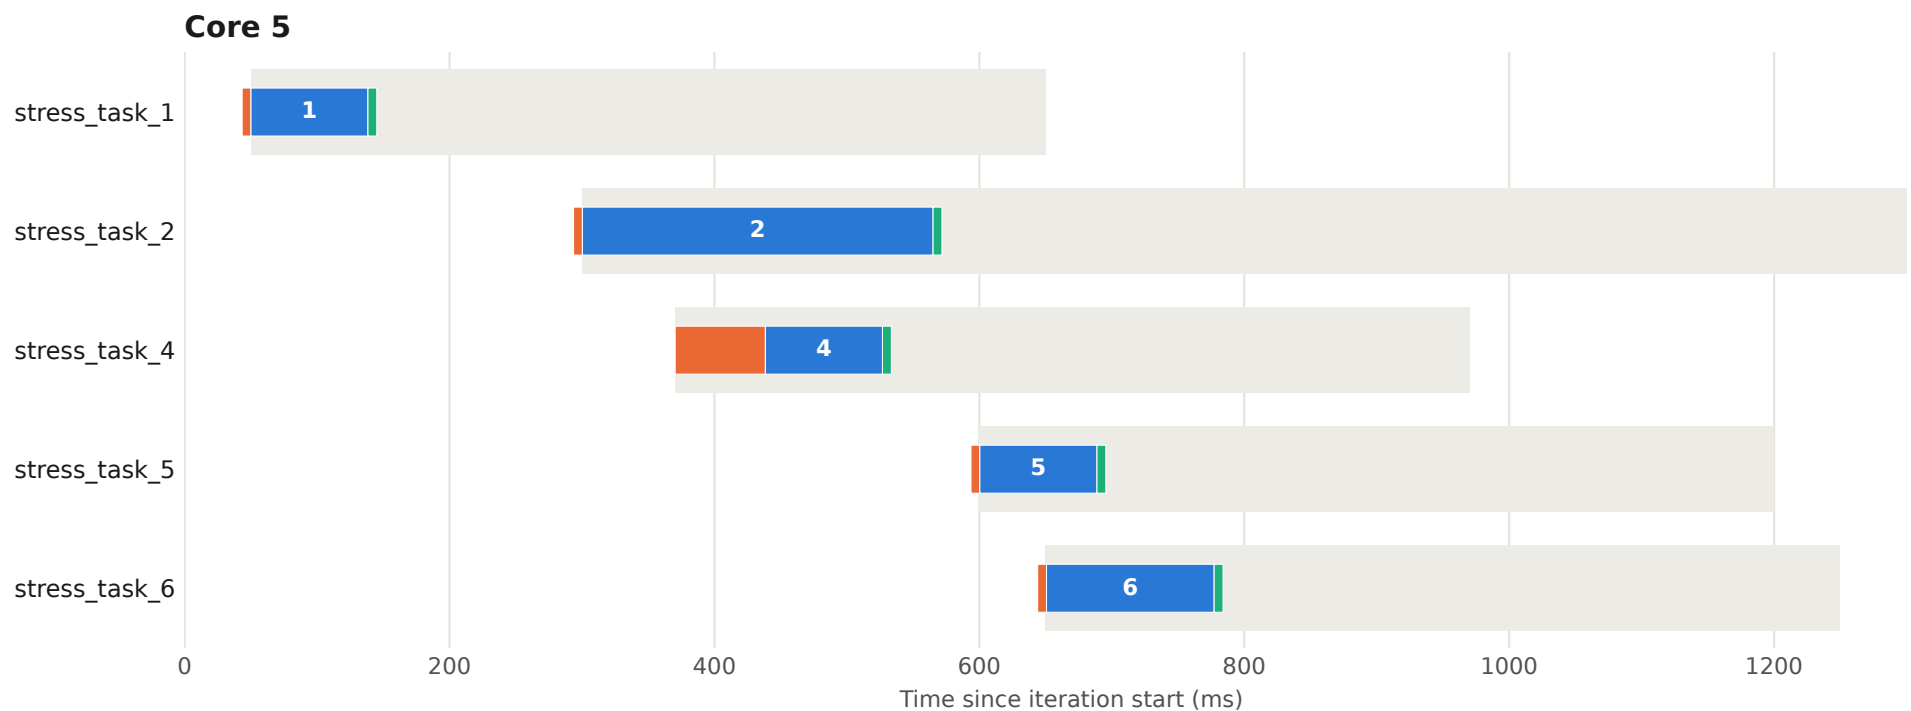


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 83 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

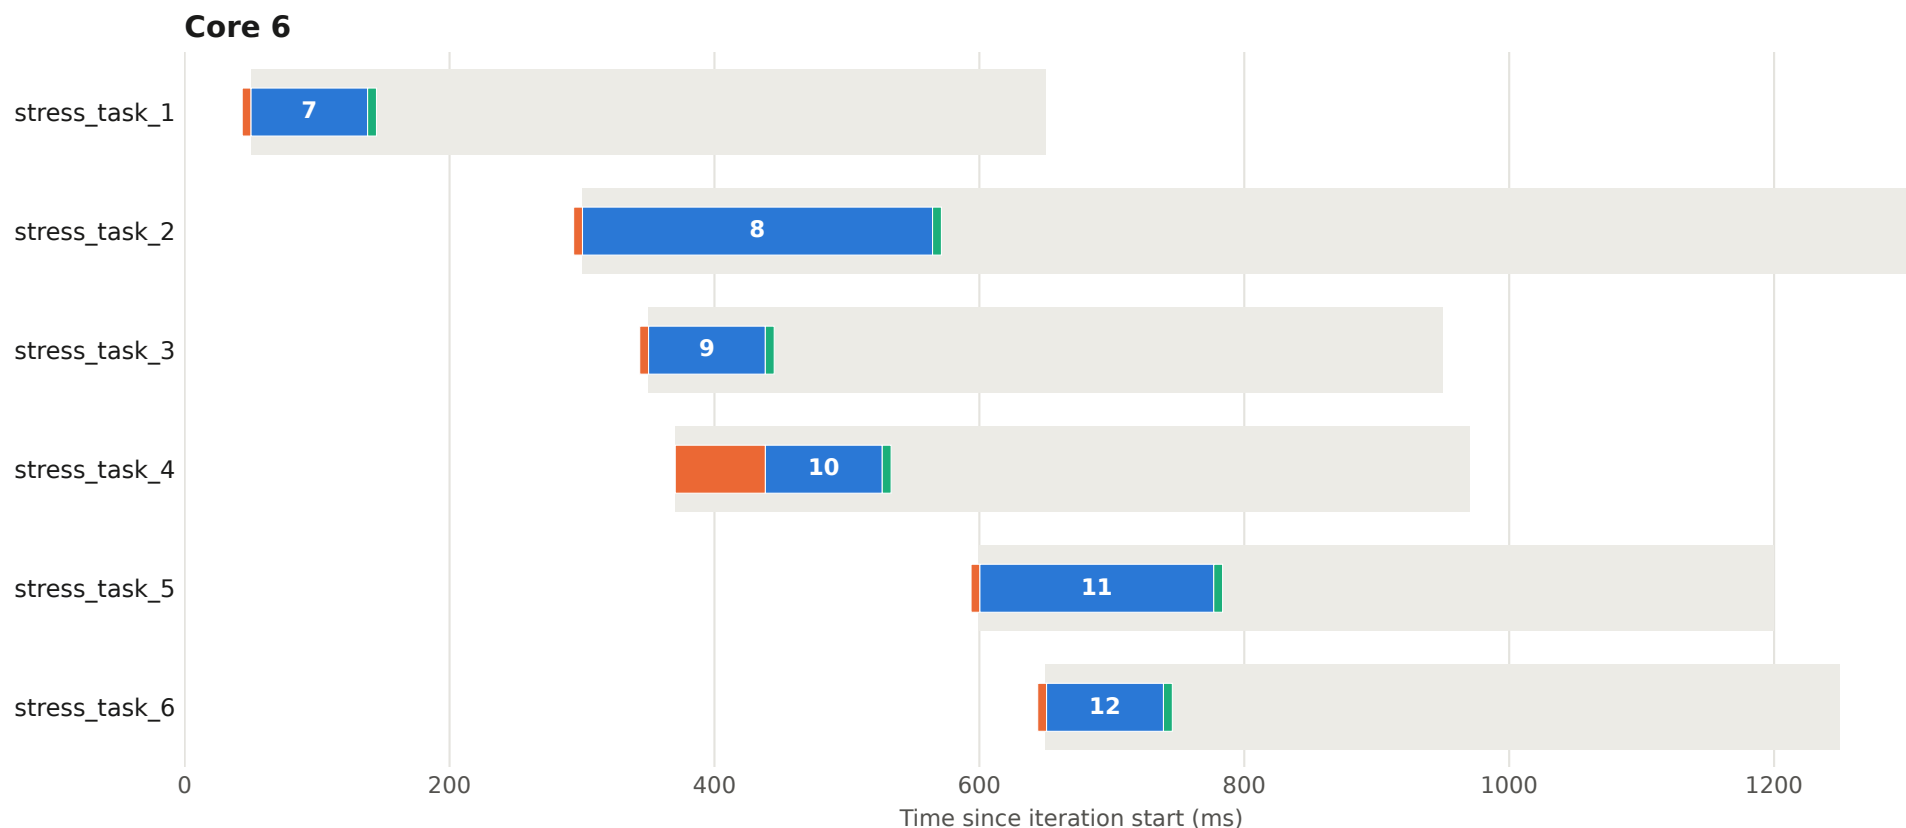


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 83 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

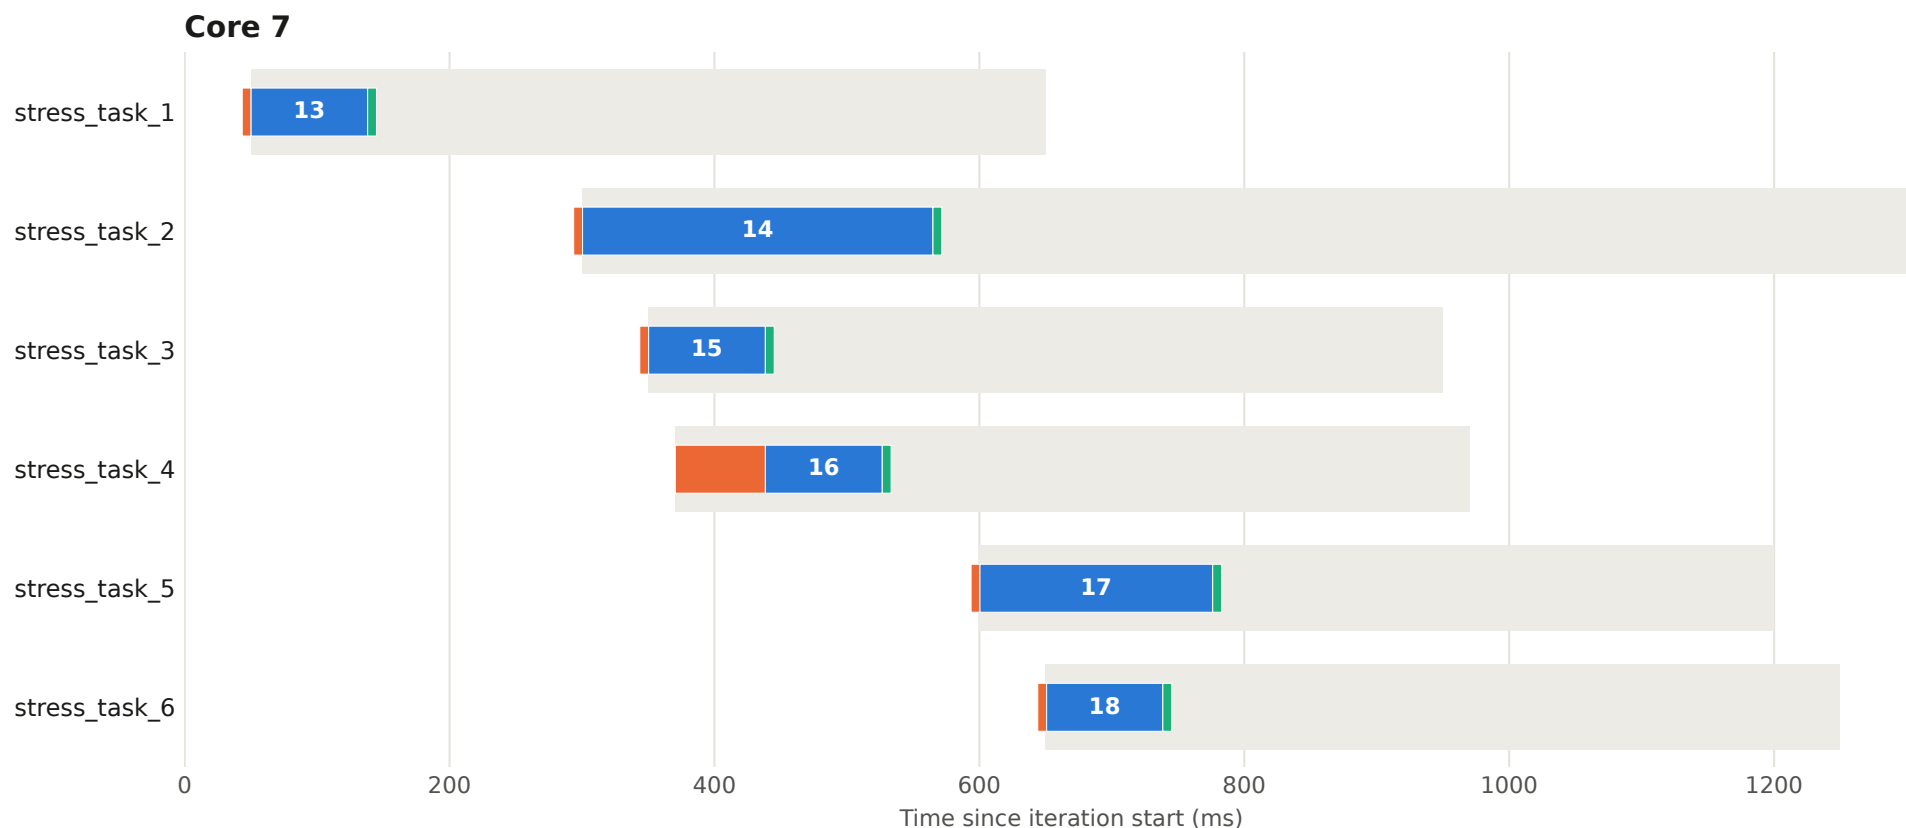


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 84 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

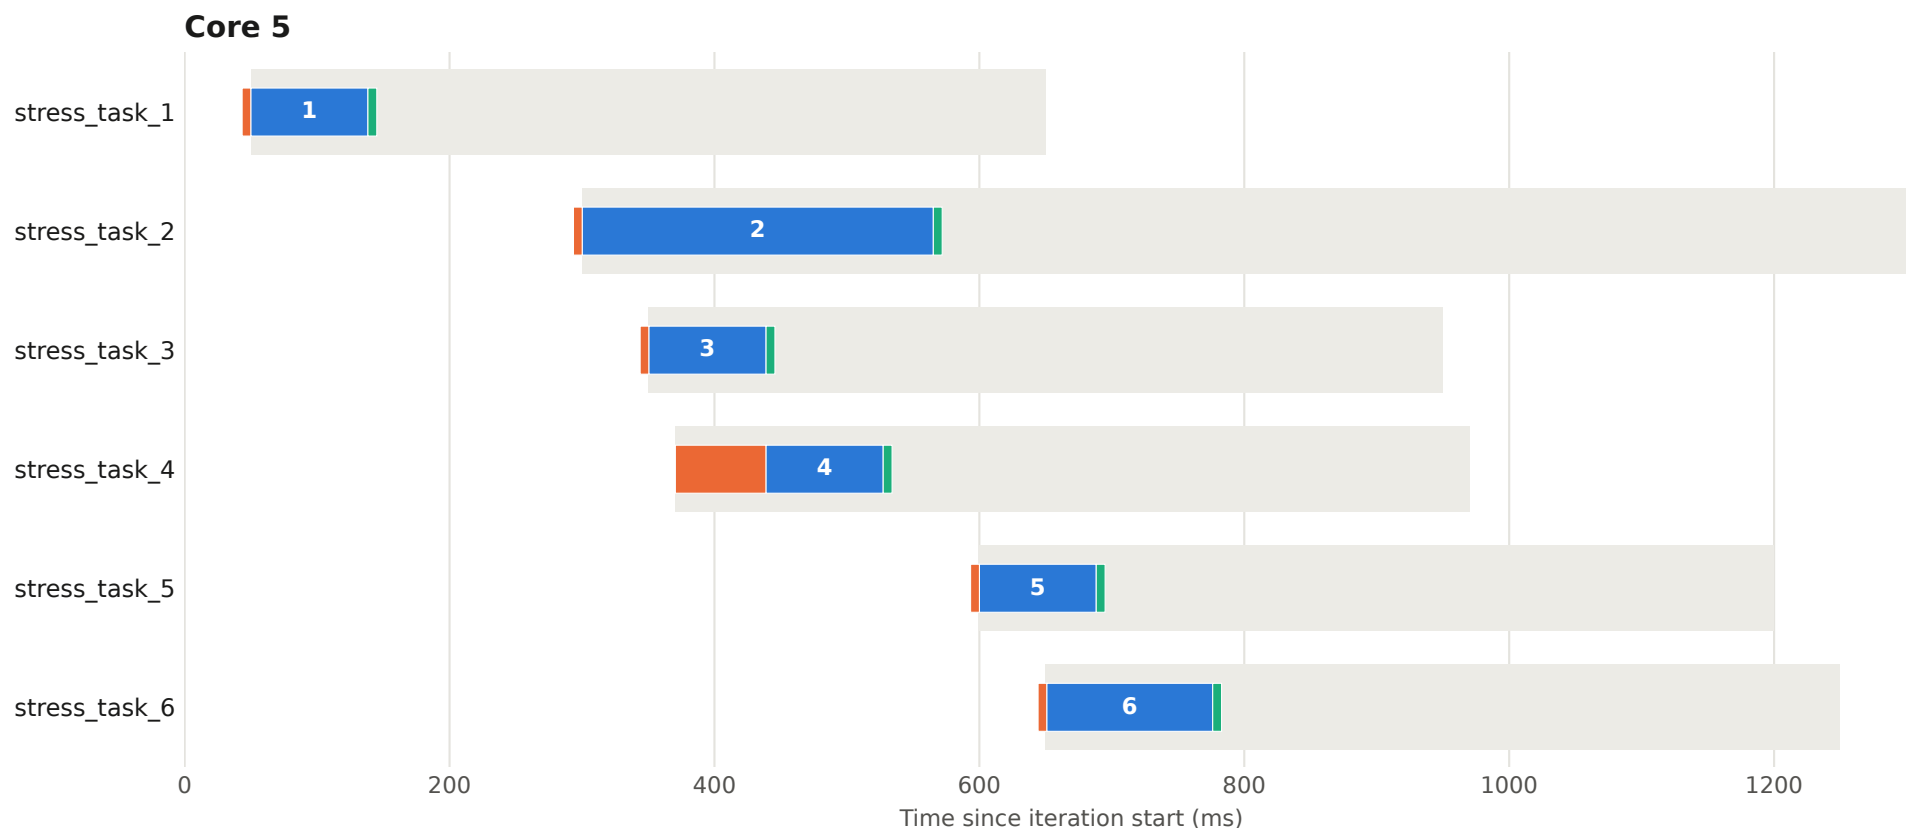


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 84 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

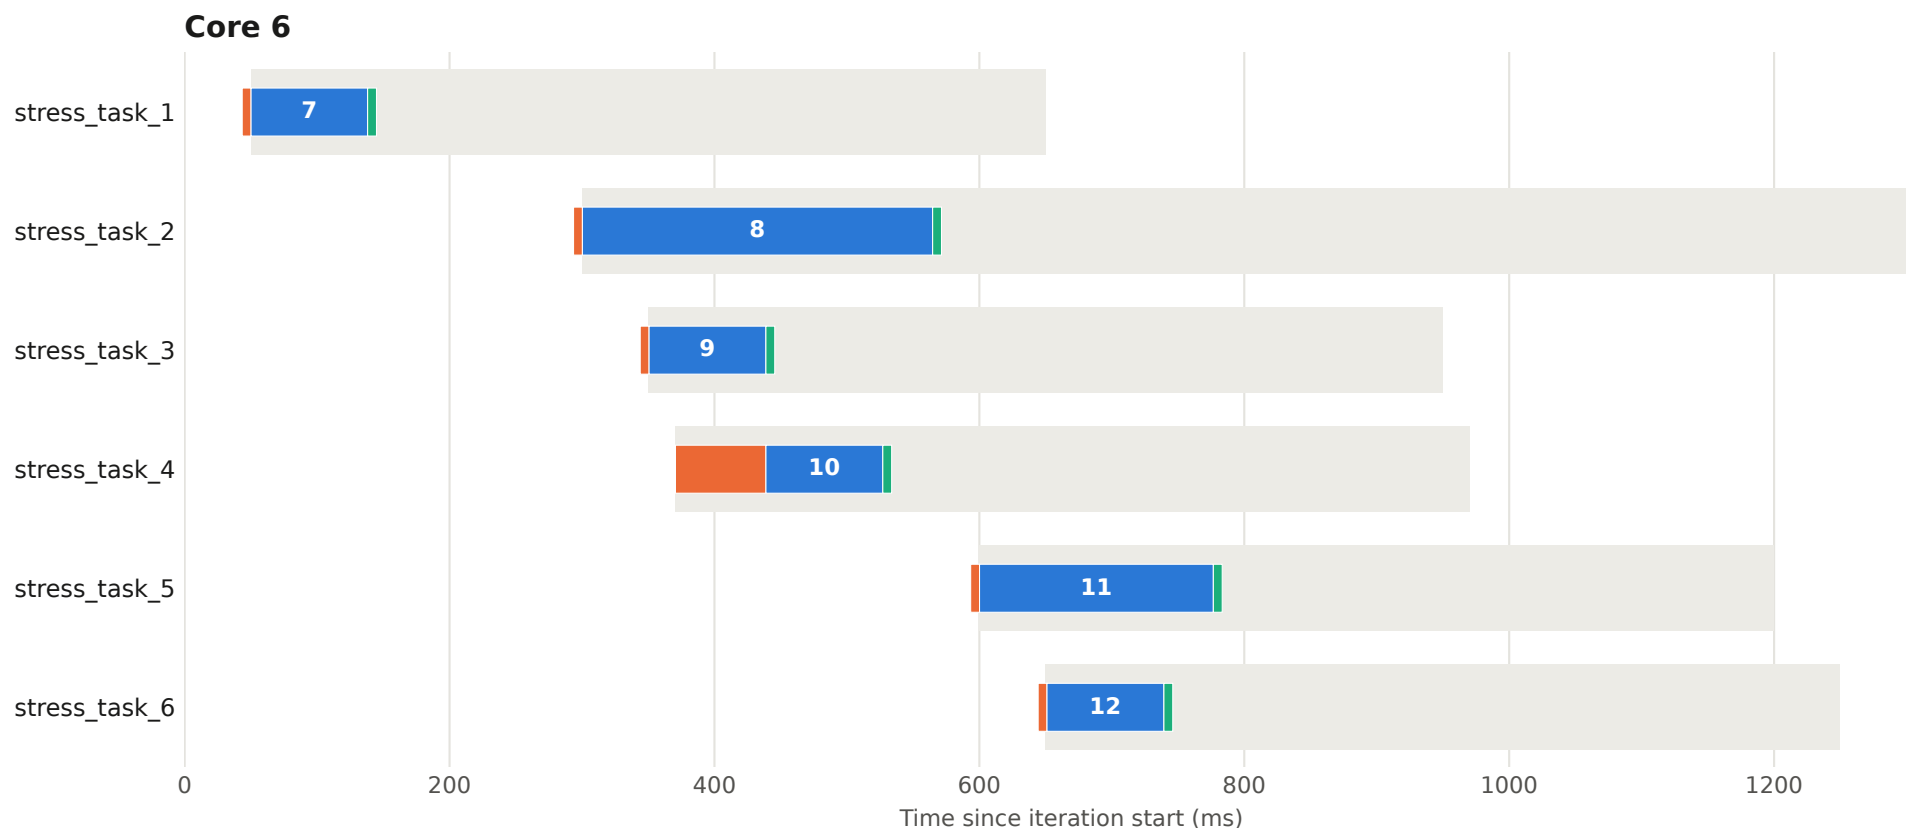


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 84 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

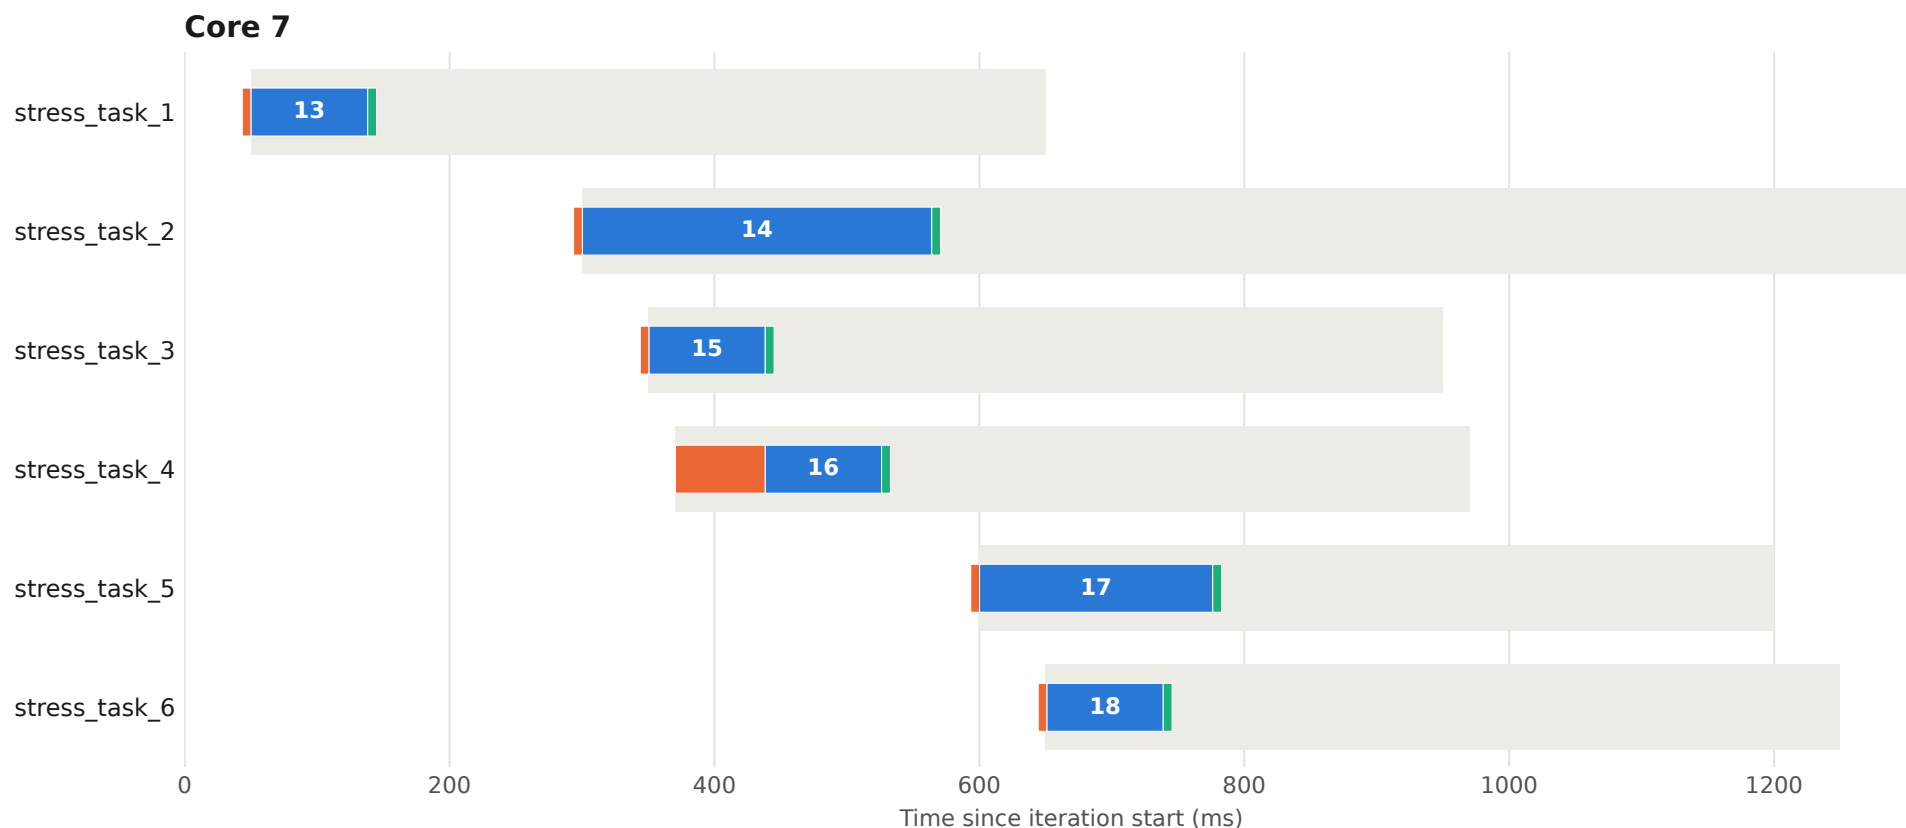


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 85 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

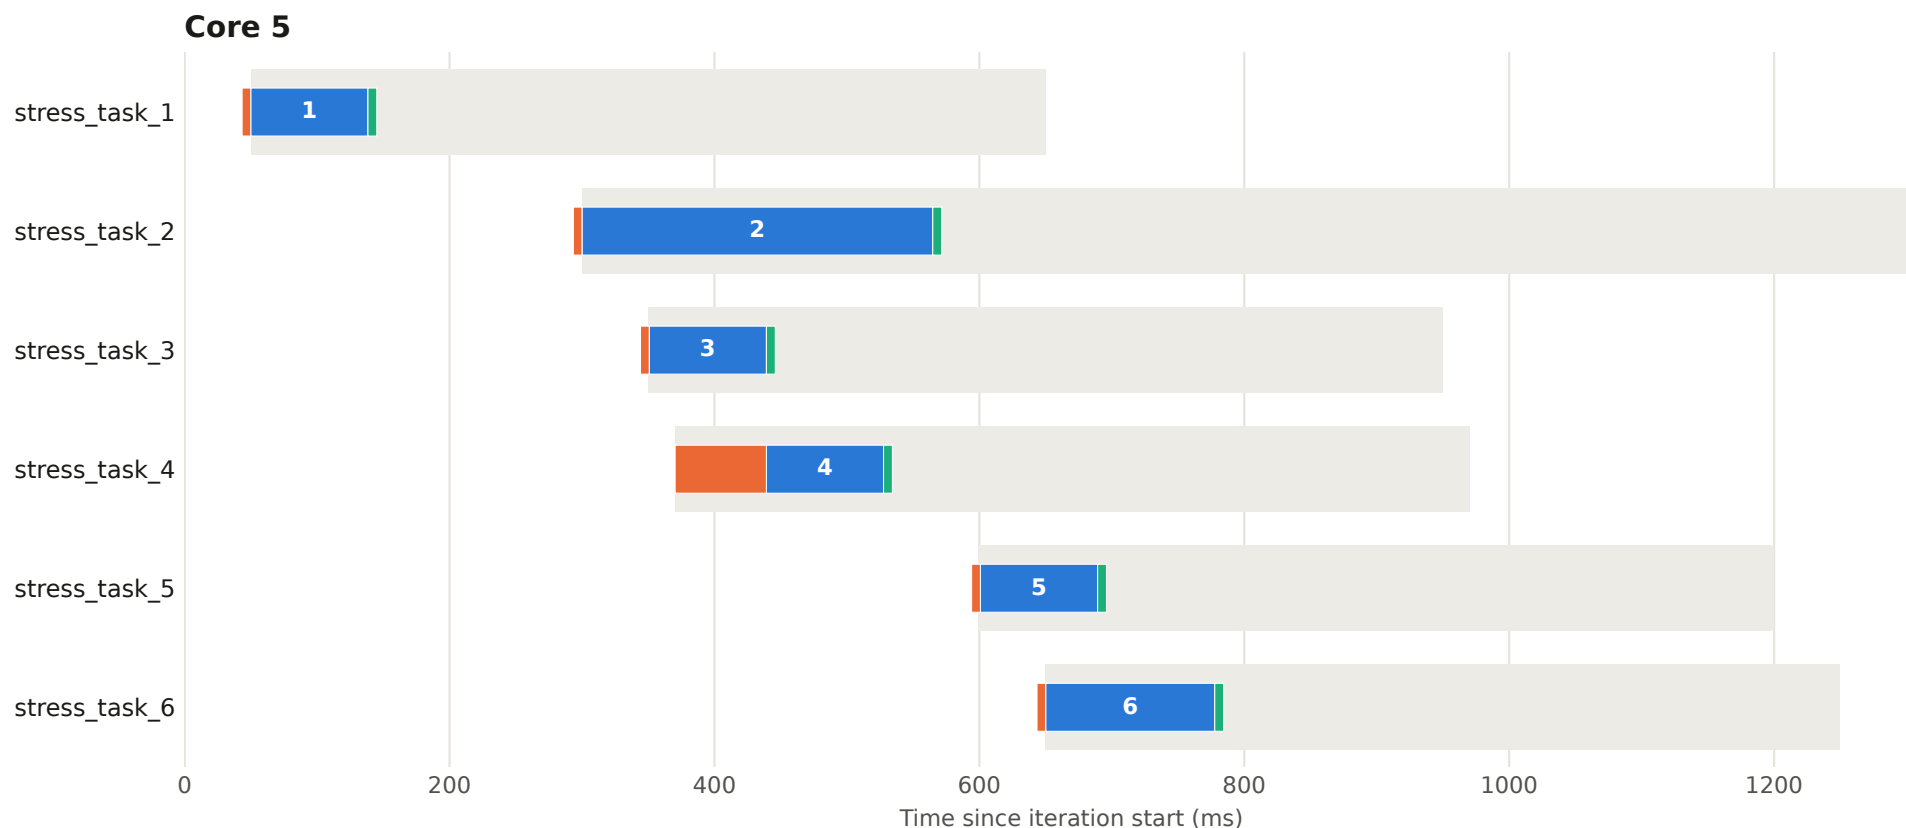


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 85 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

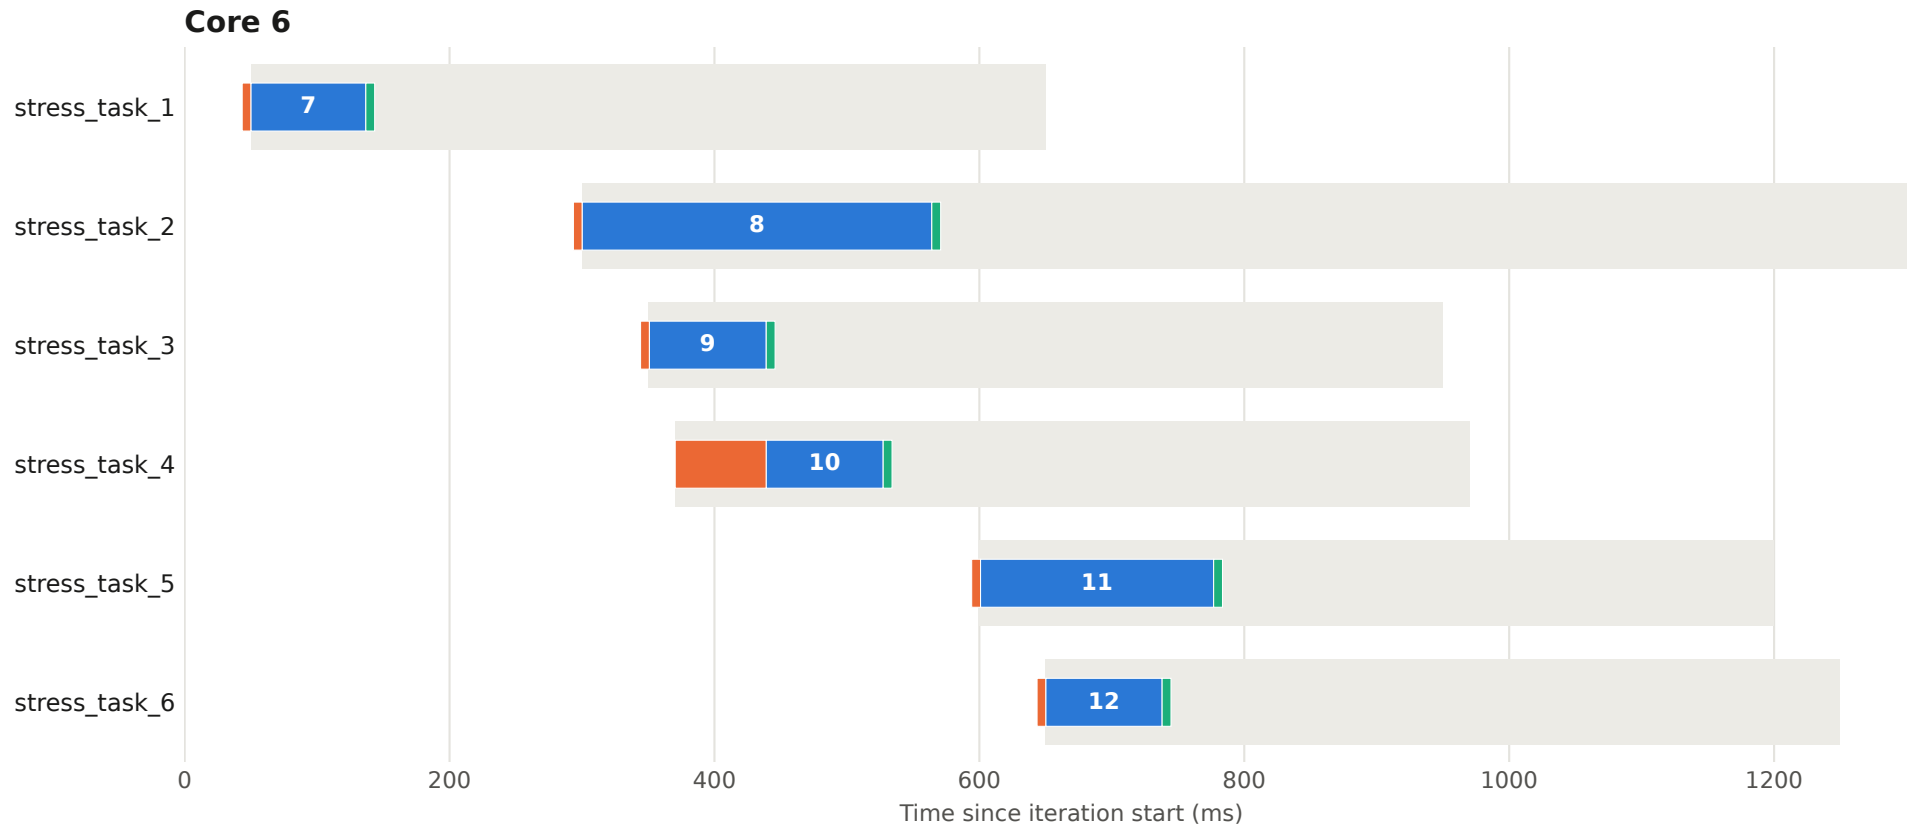


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 85 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

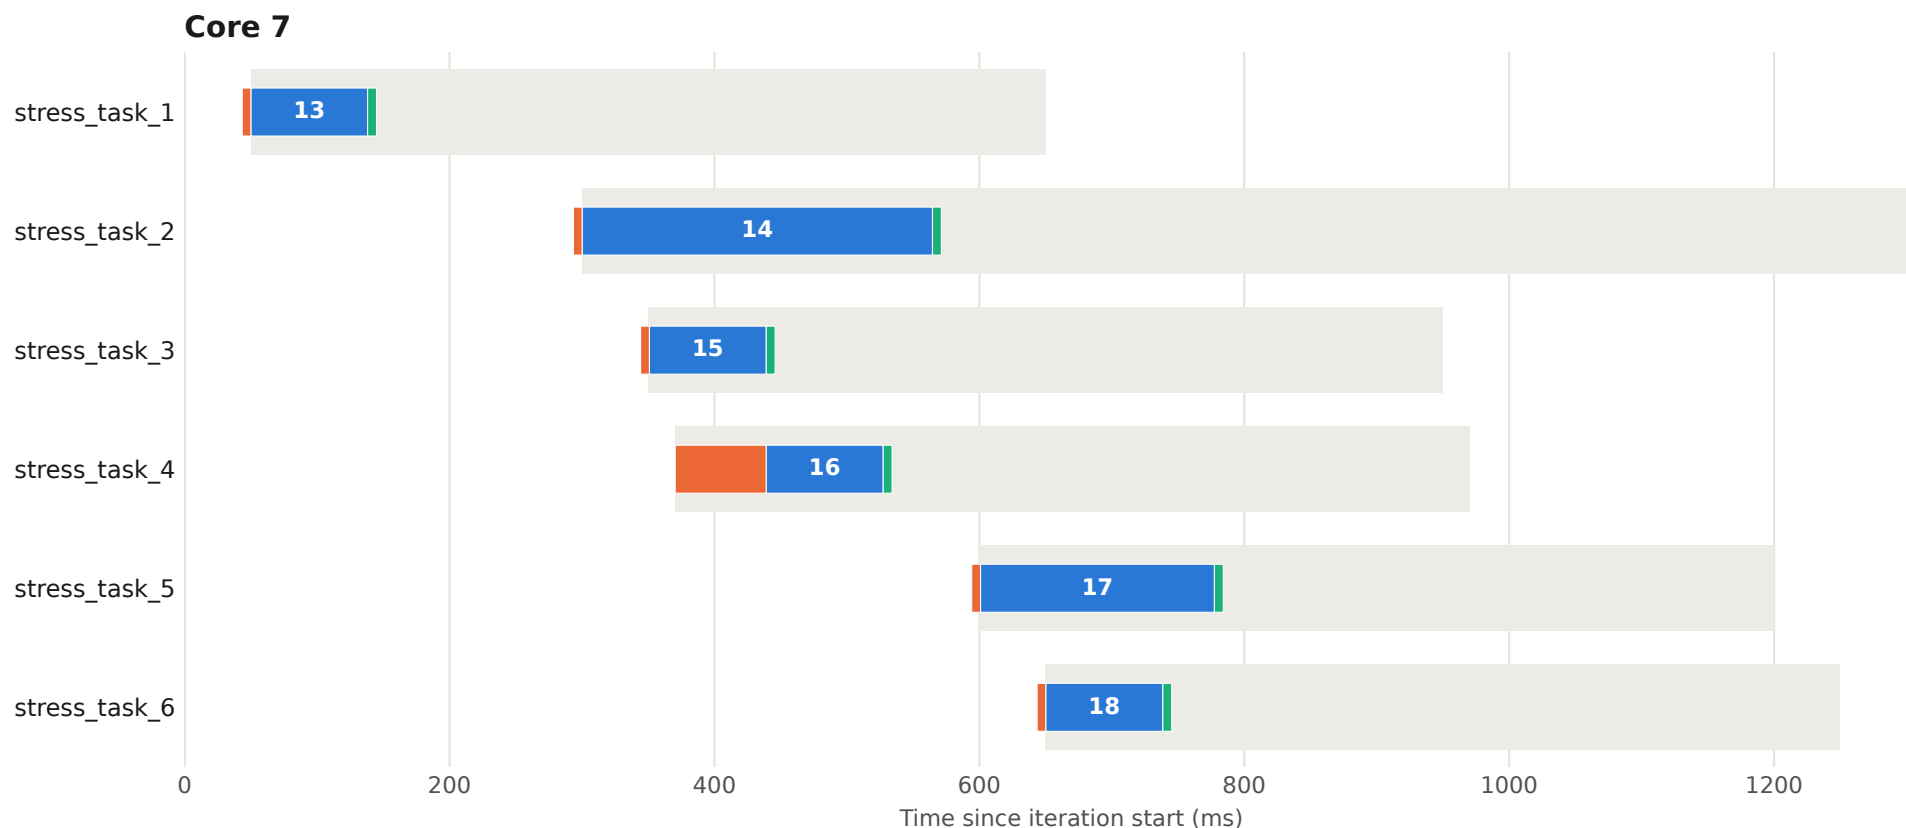


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 86 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

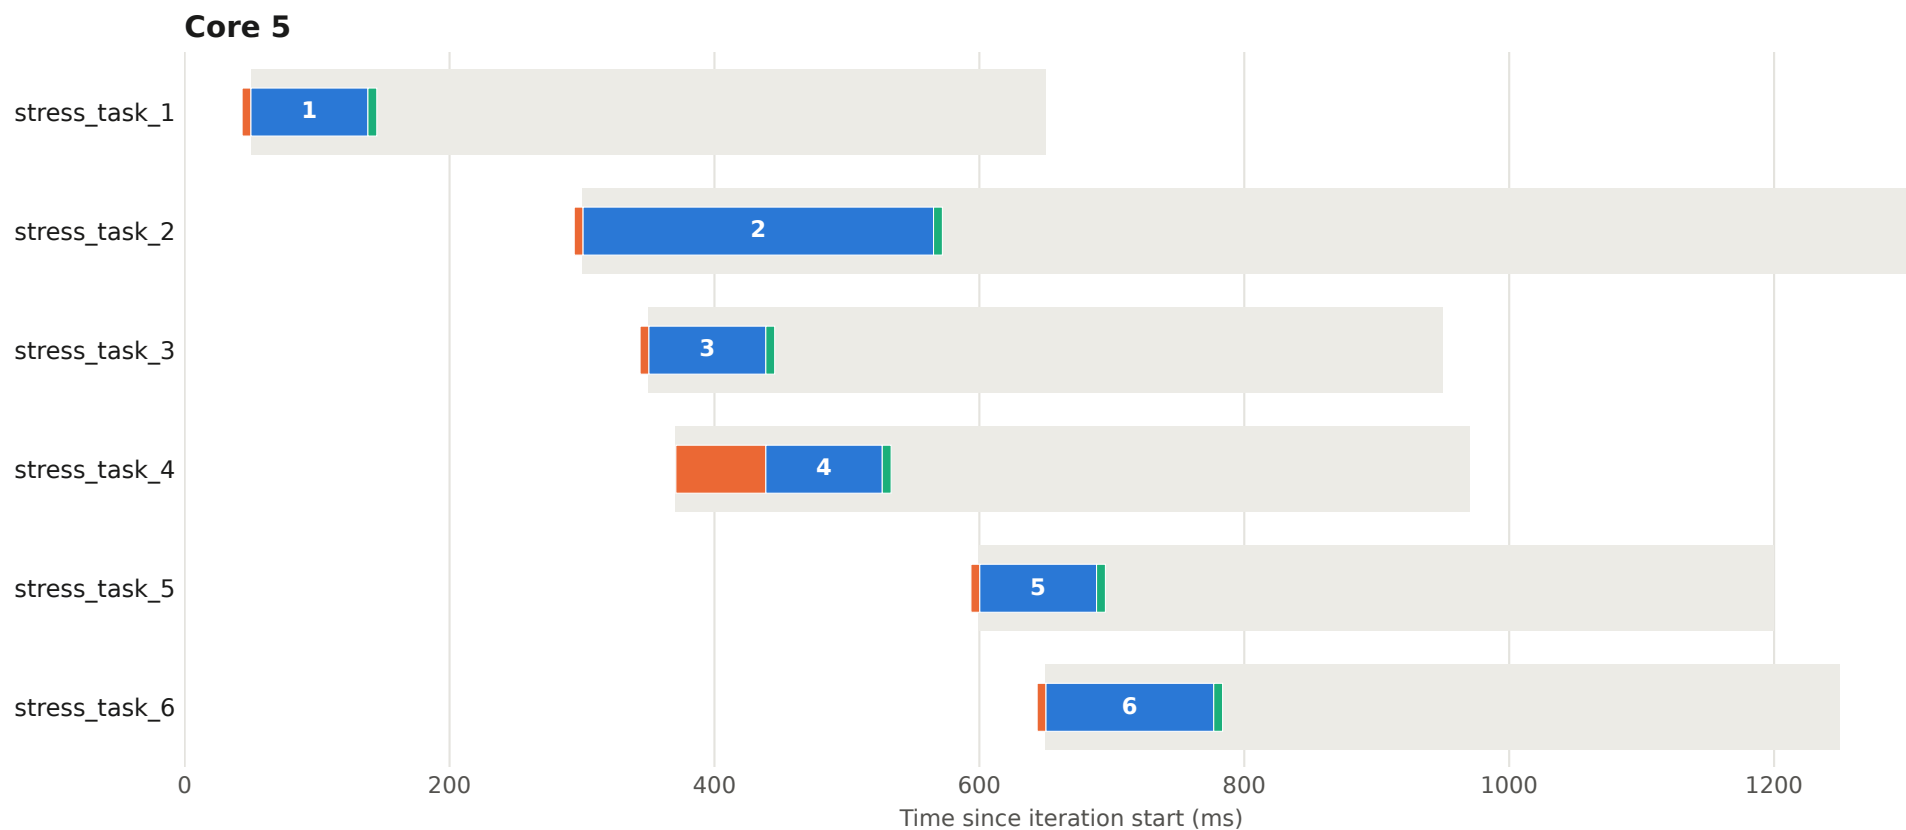


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 86 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

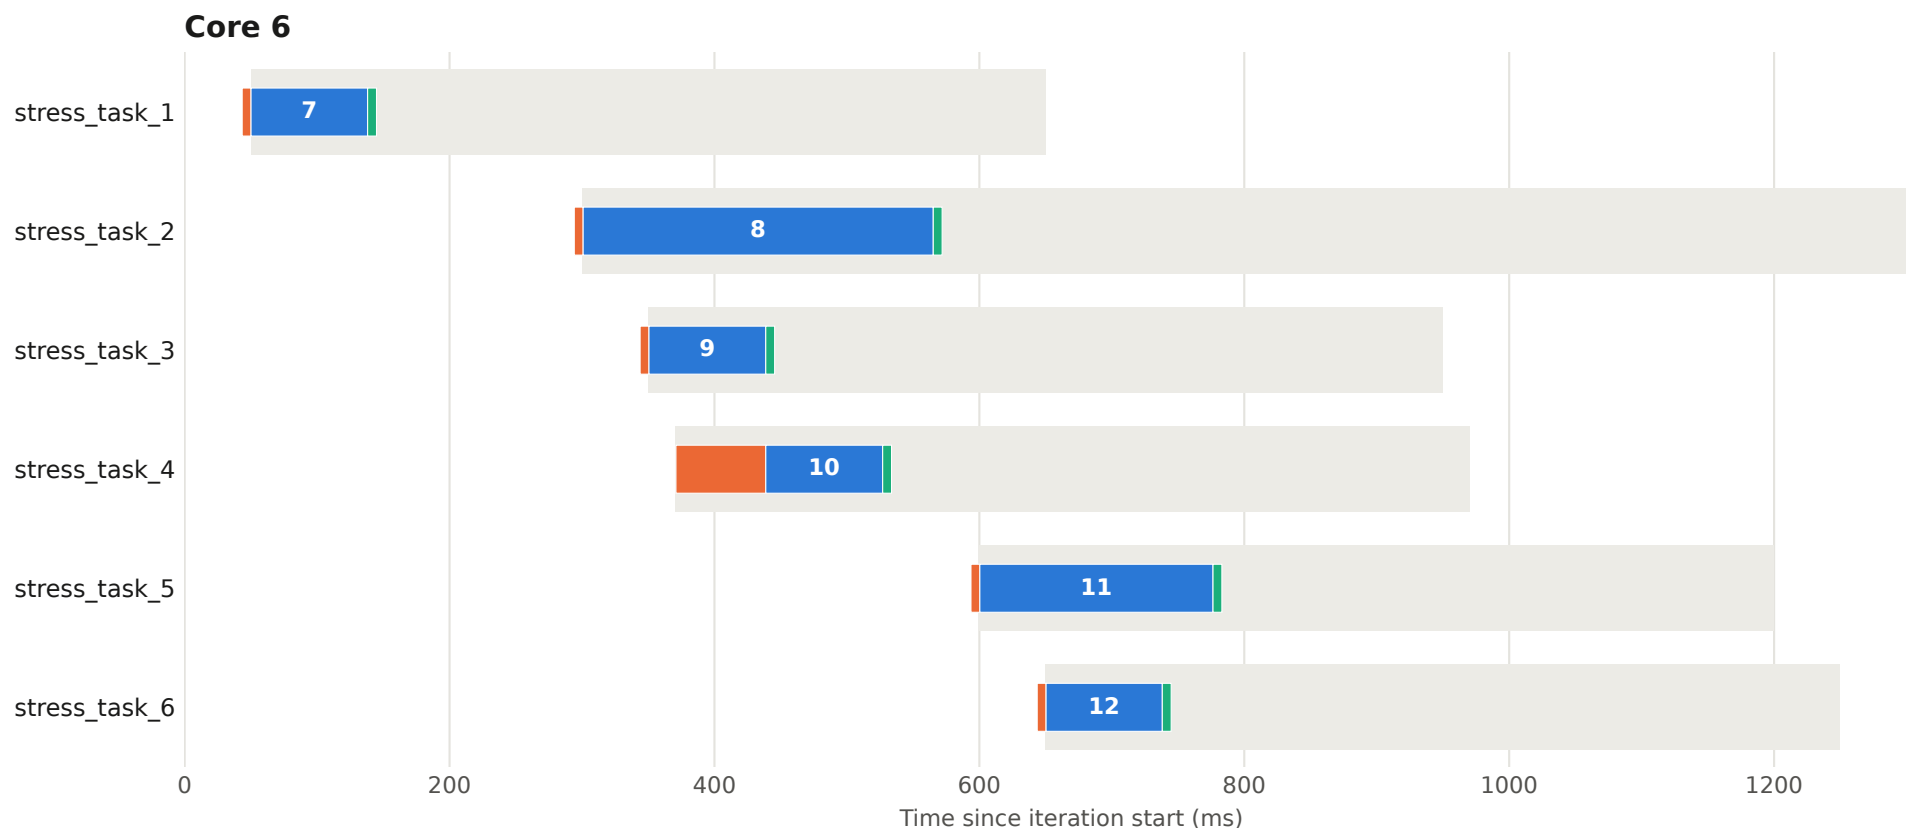


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 86 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

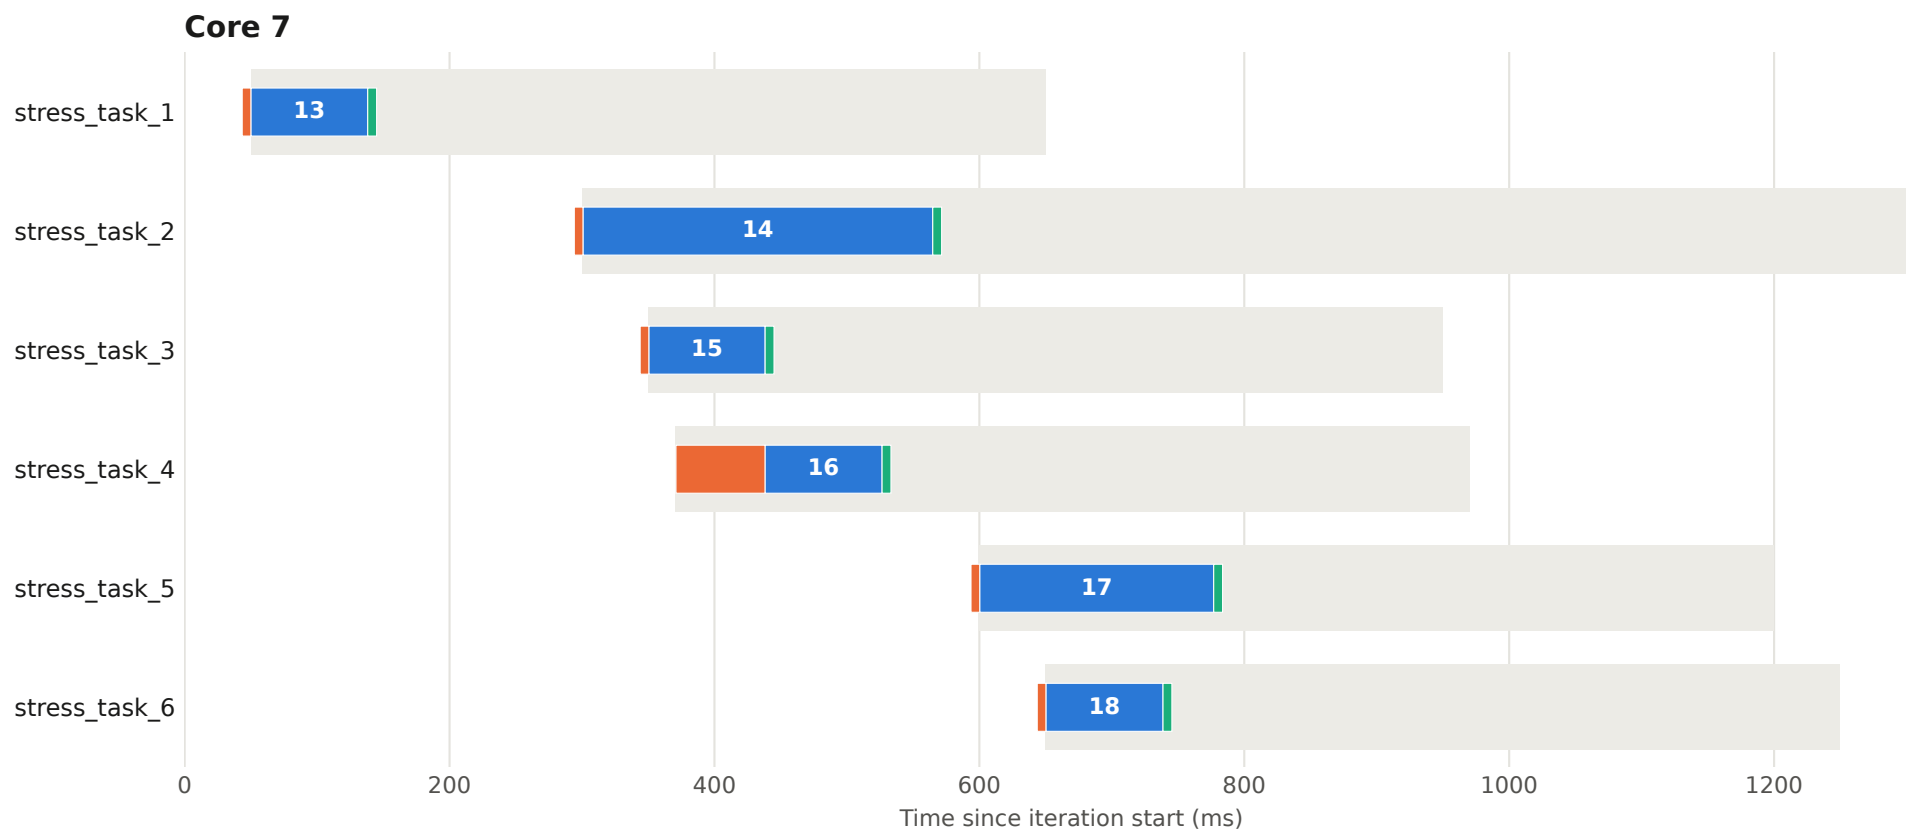


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 87 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

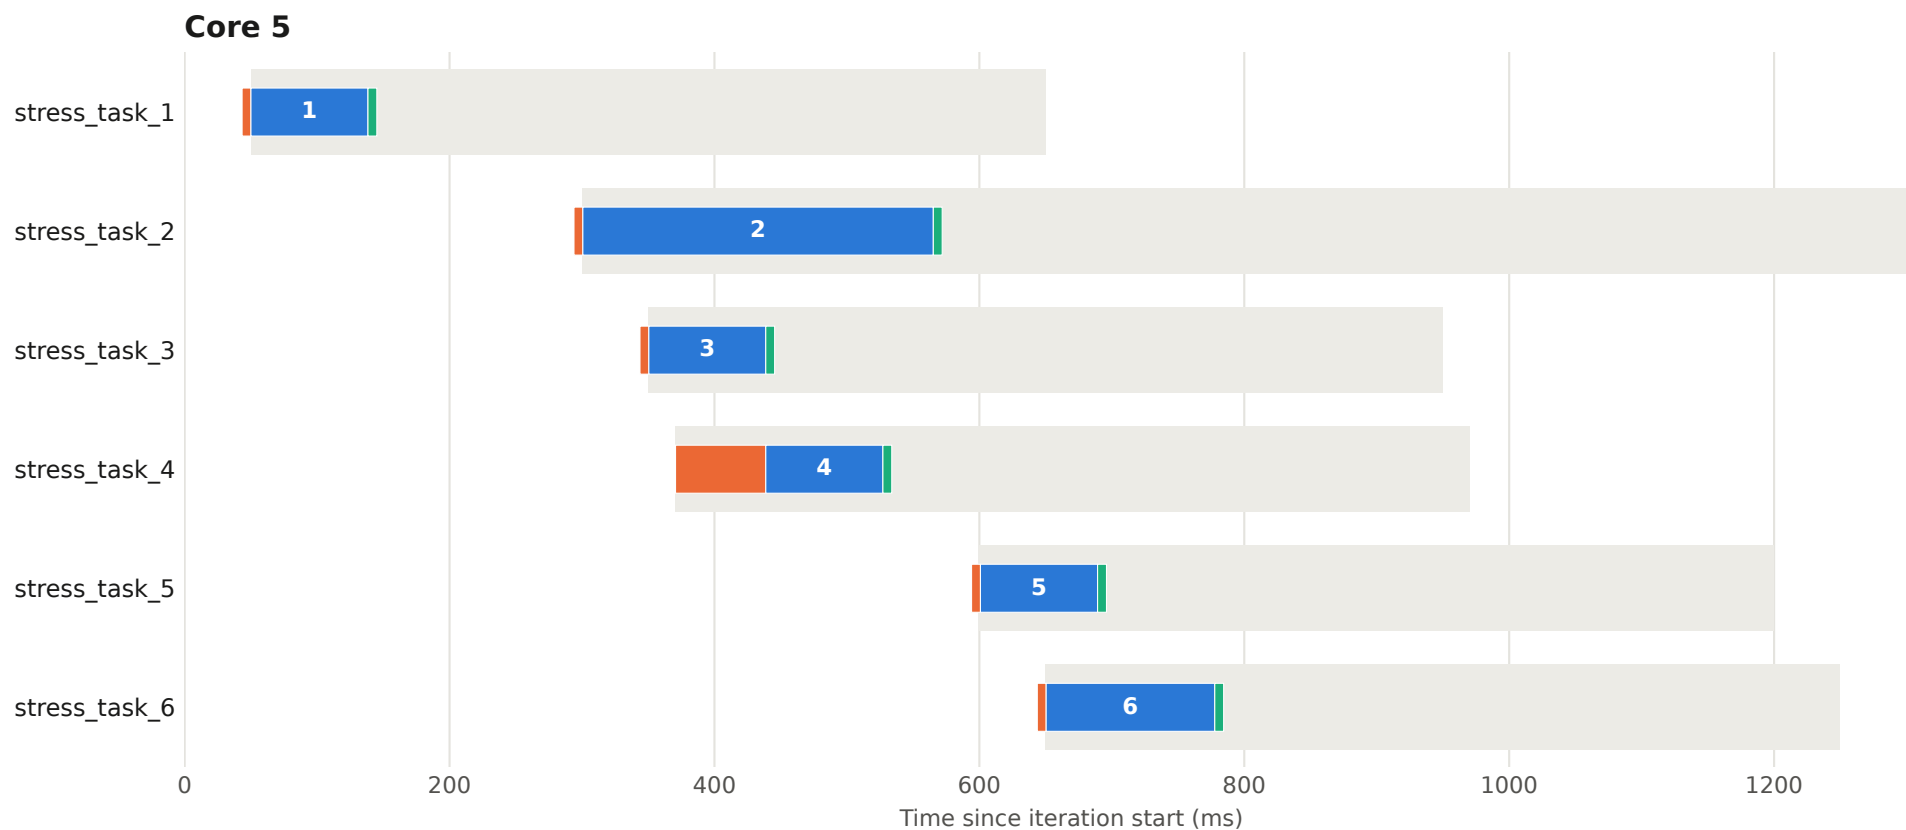


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 87 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

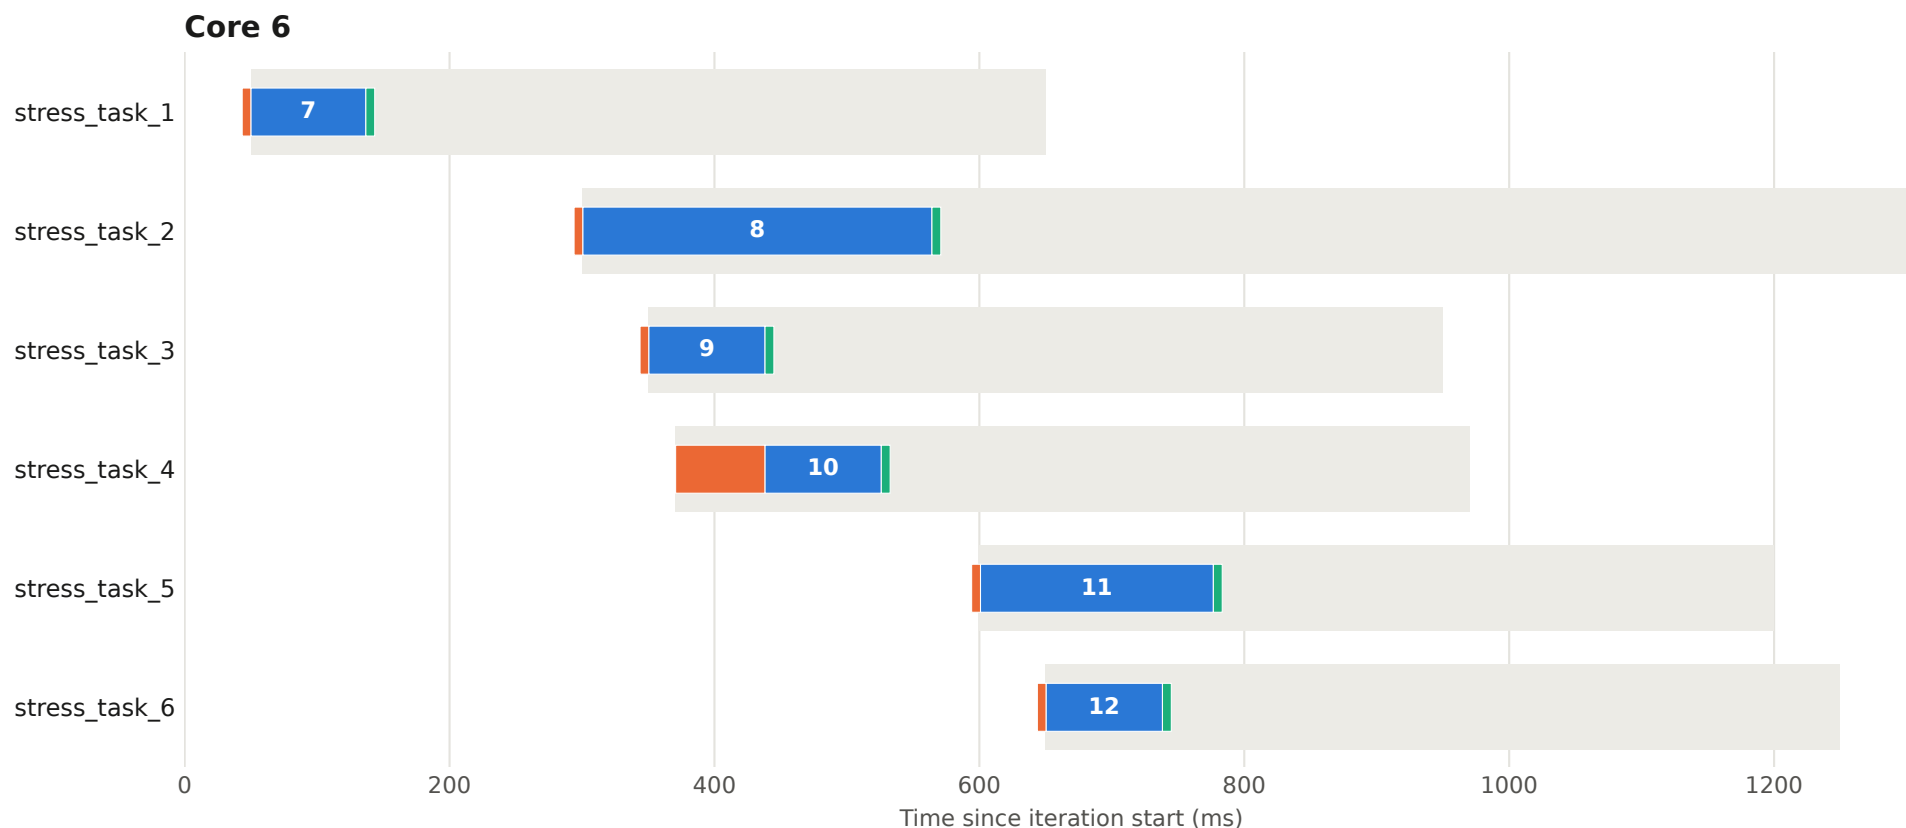


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 87 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

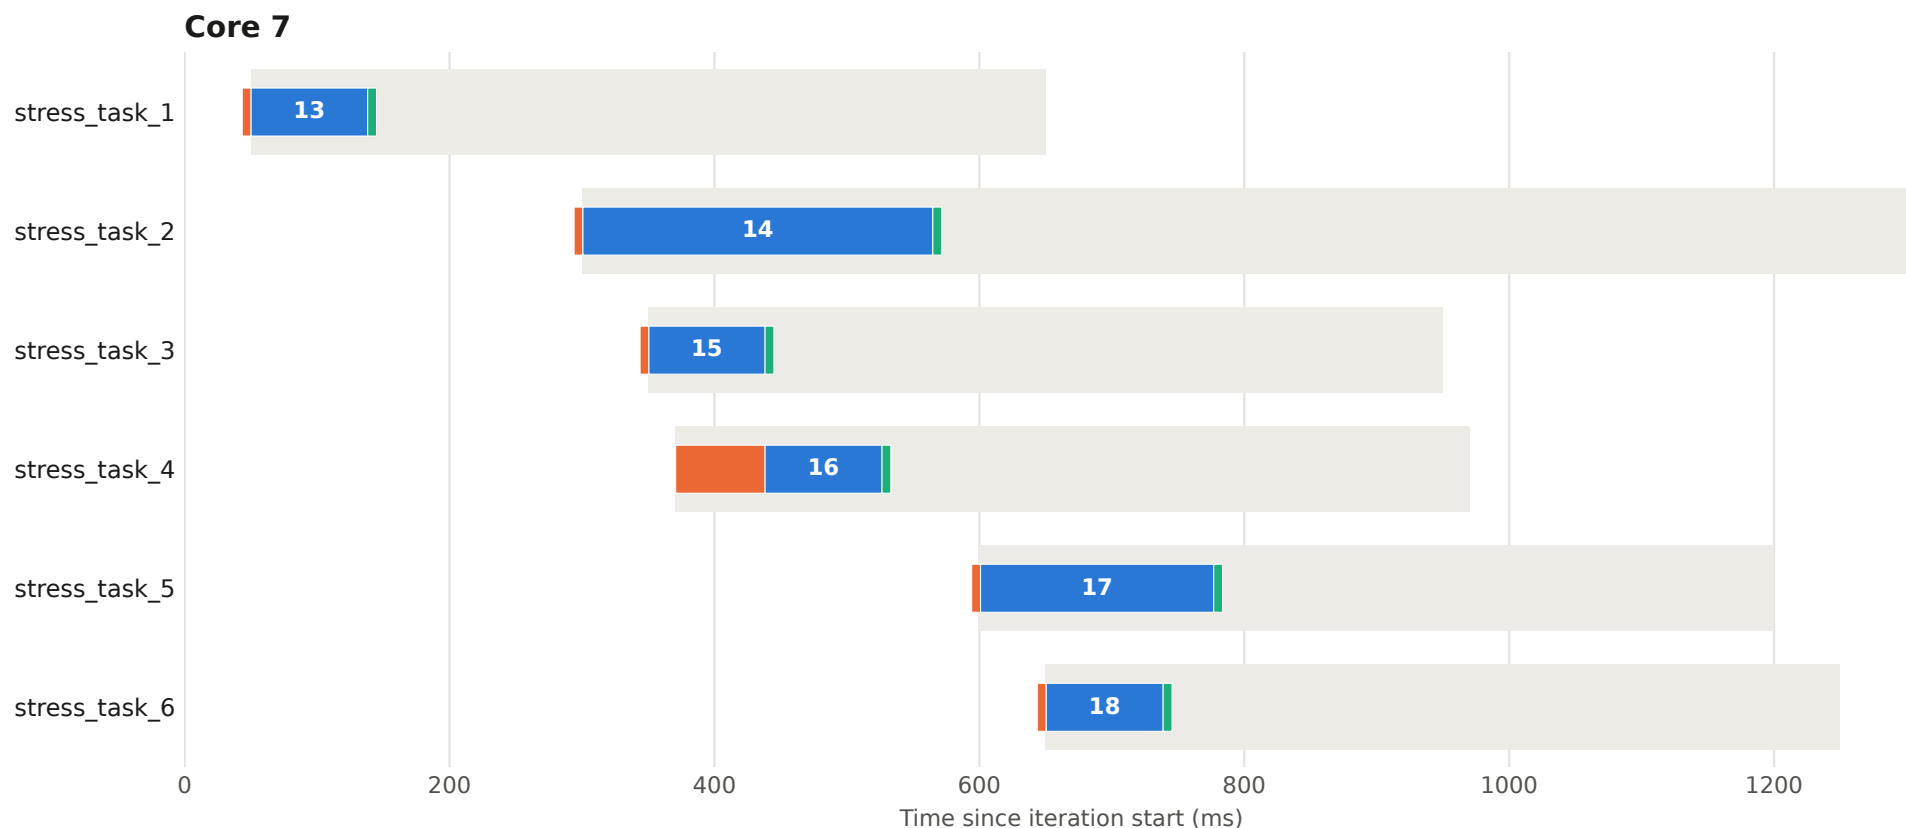


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 88 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

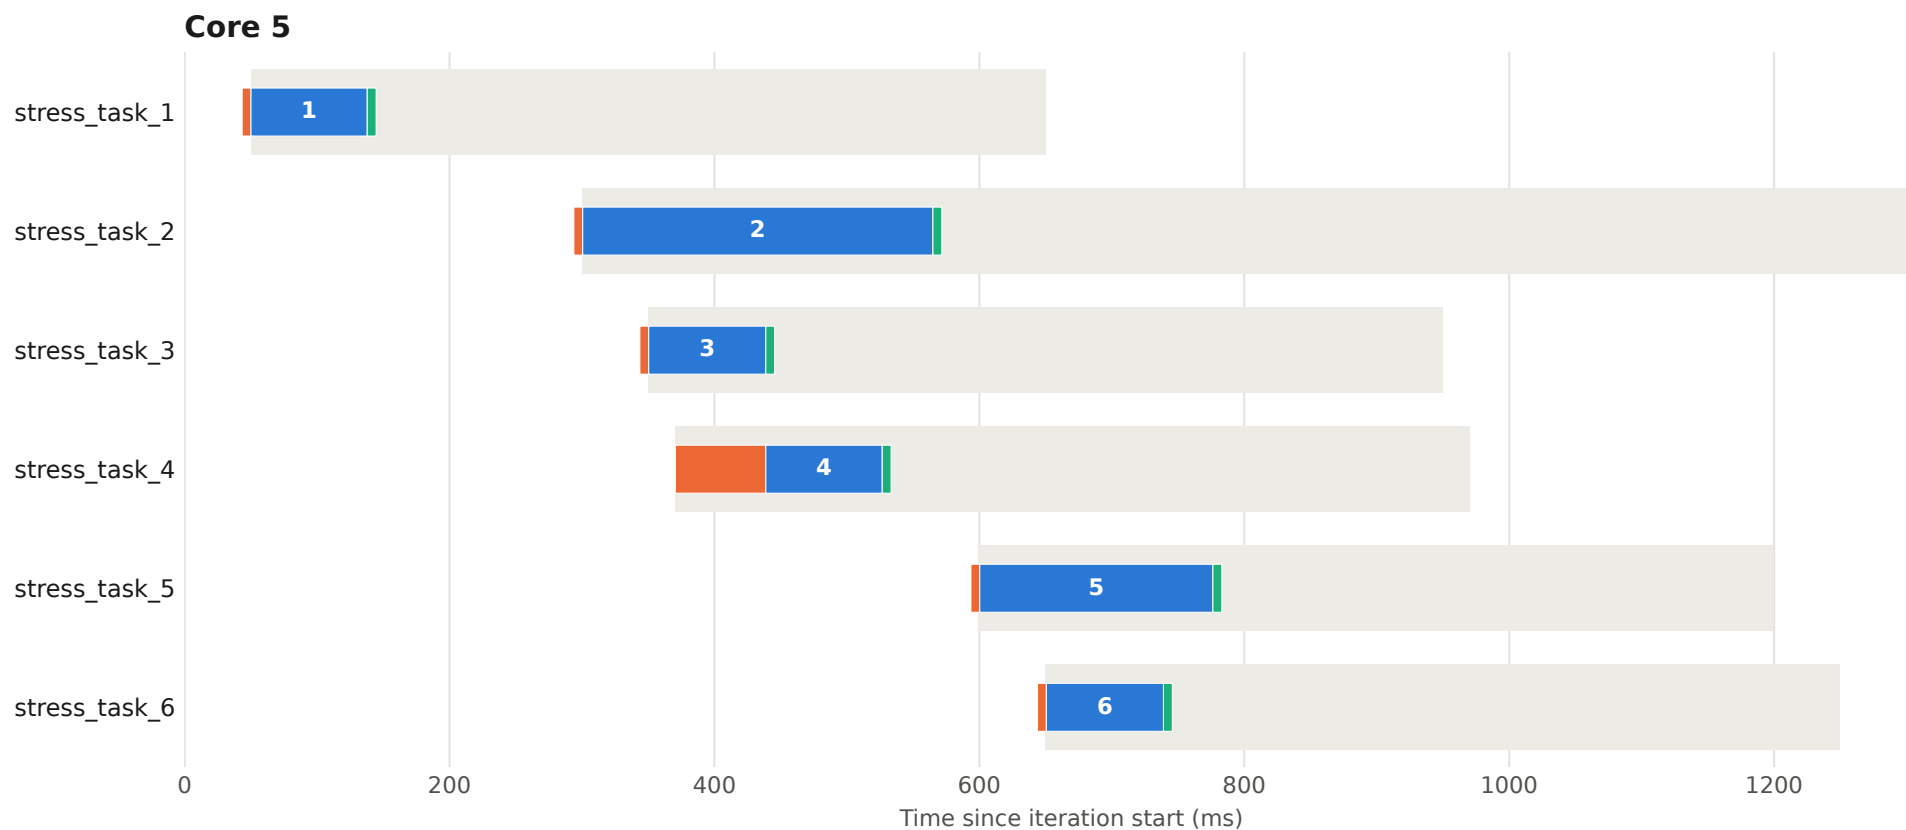


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 88 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

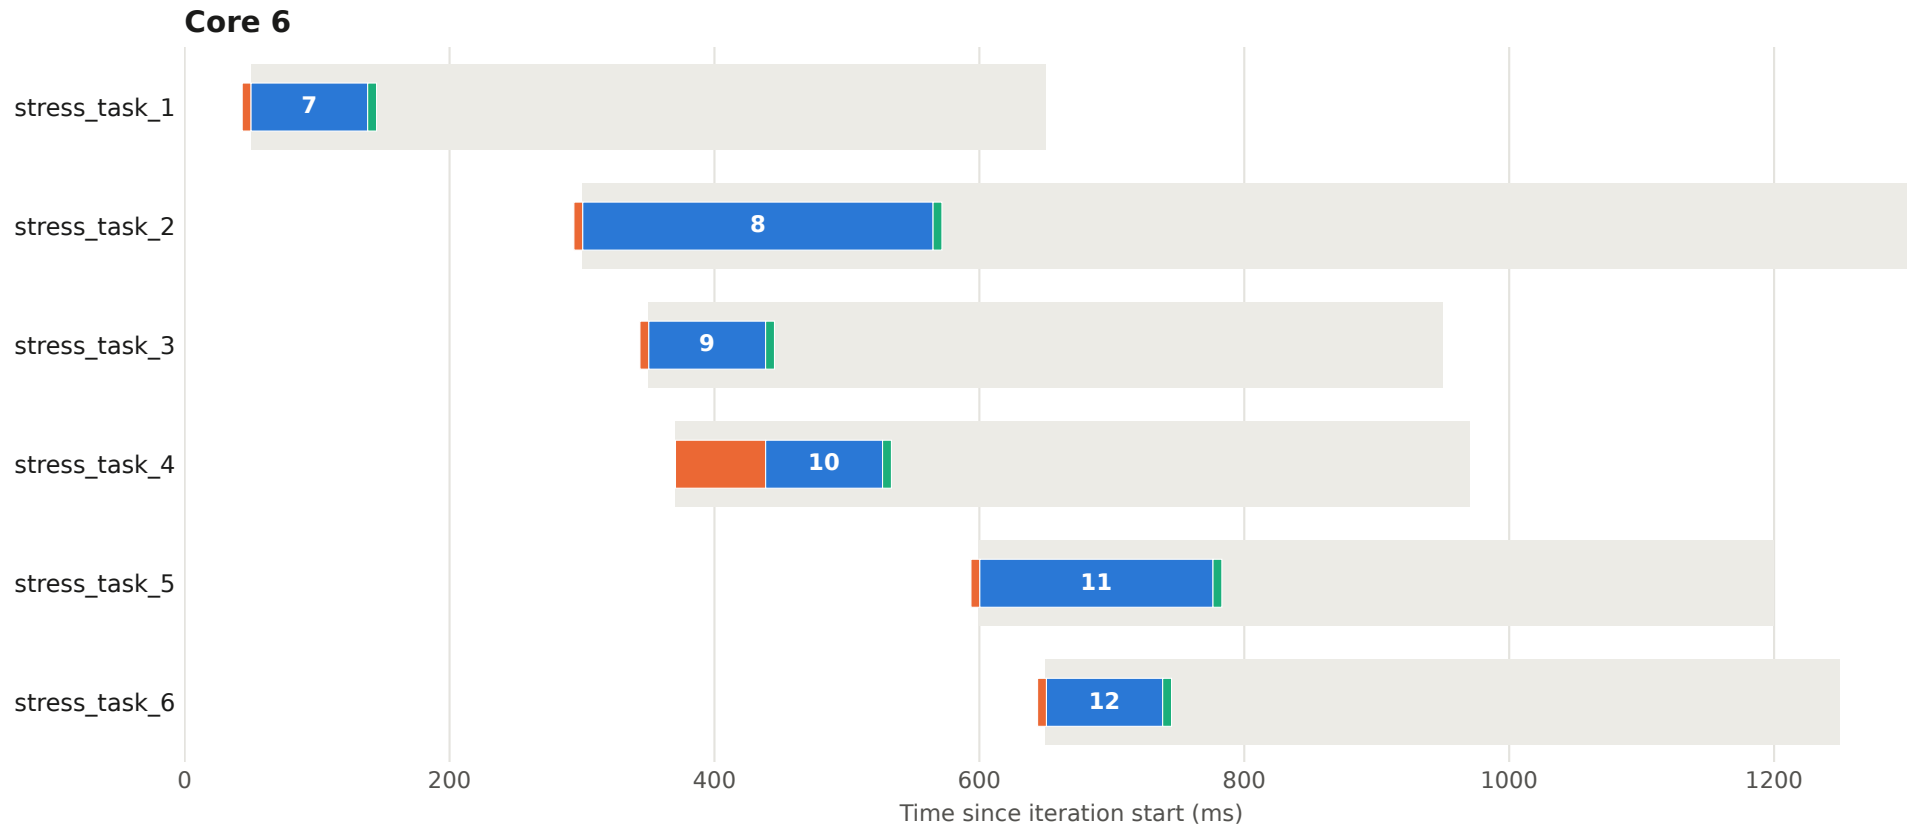


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 88 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

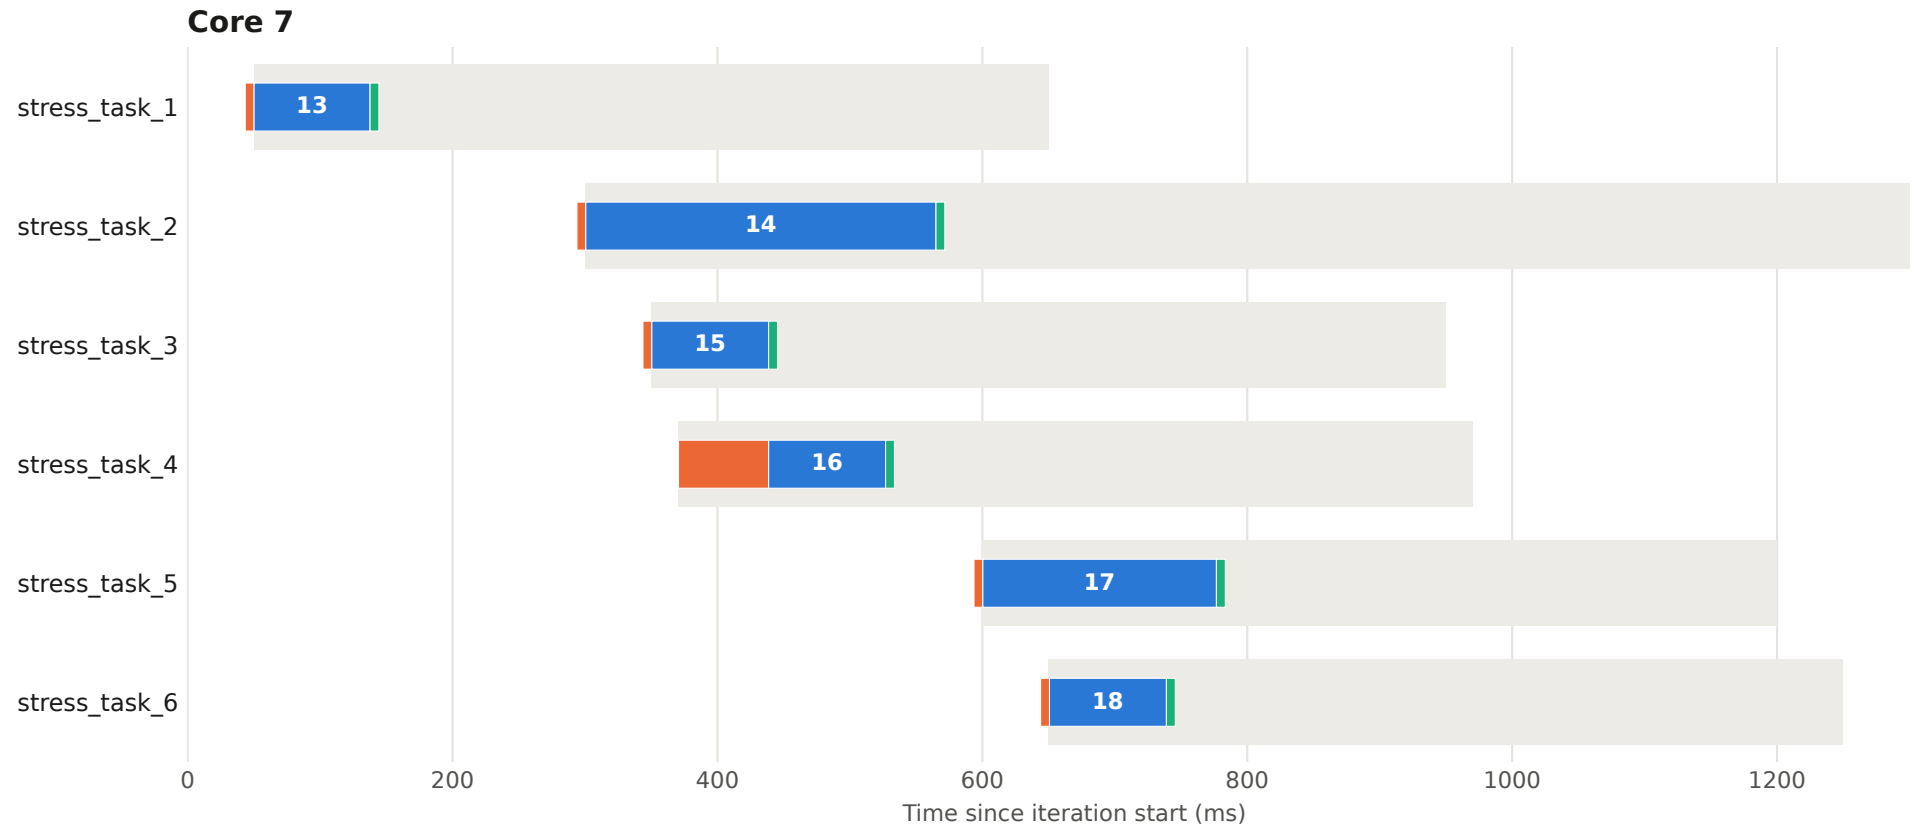


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 89 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

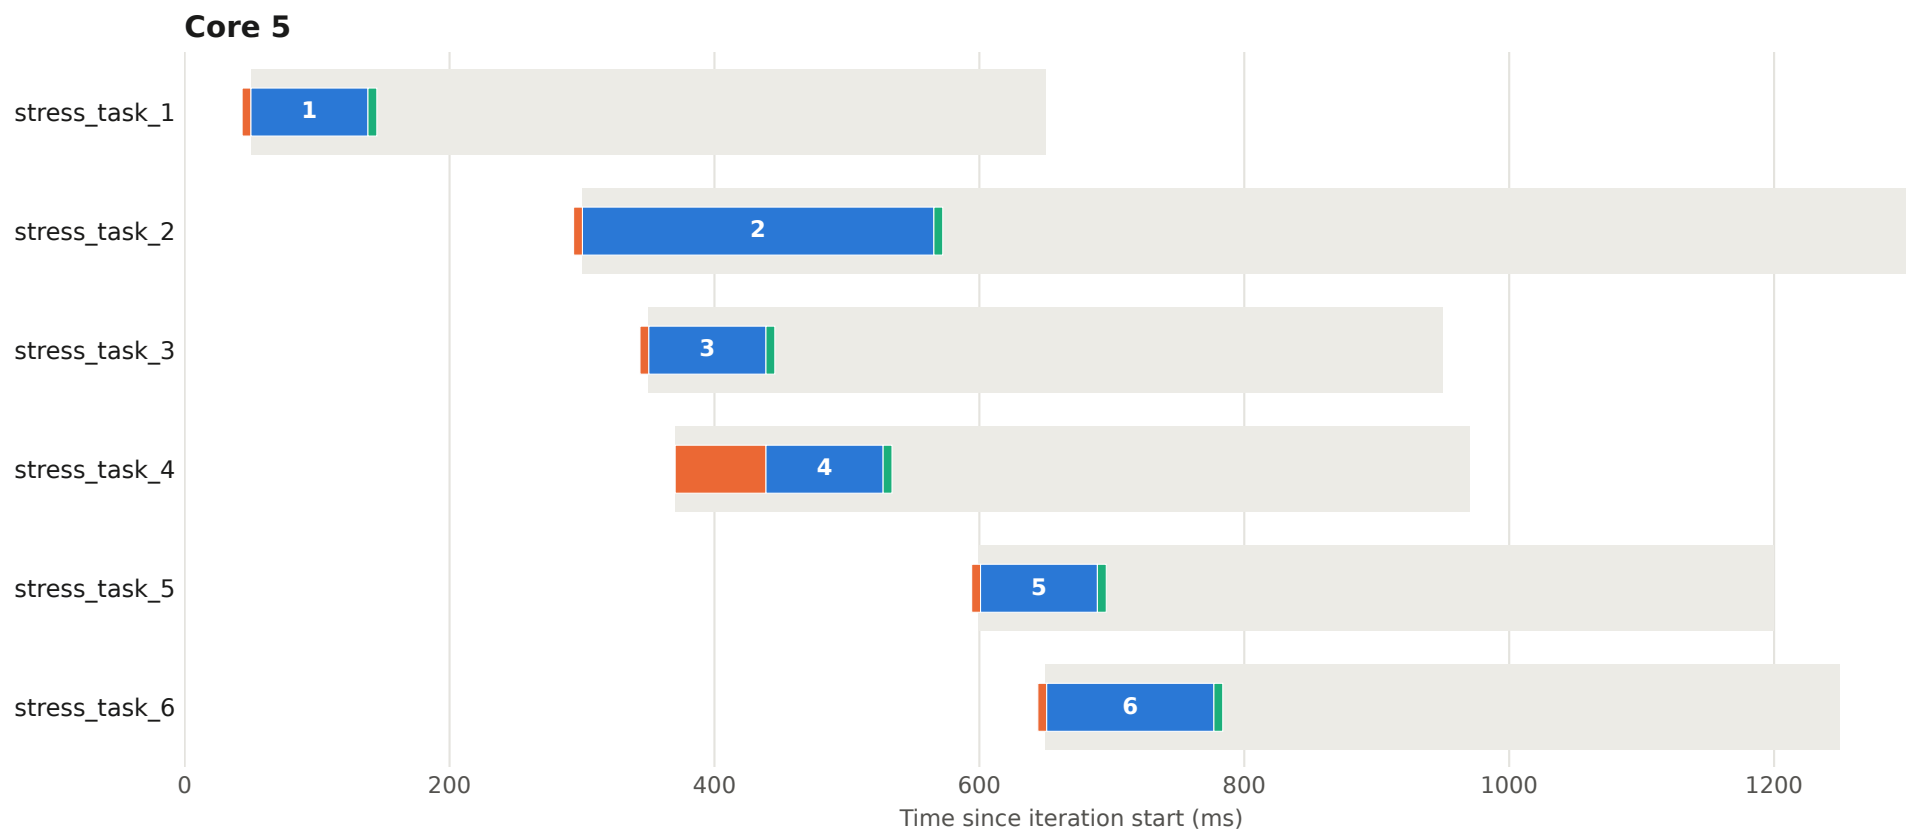


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 89 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

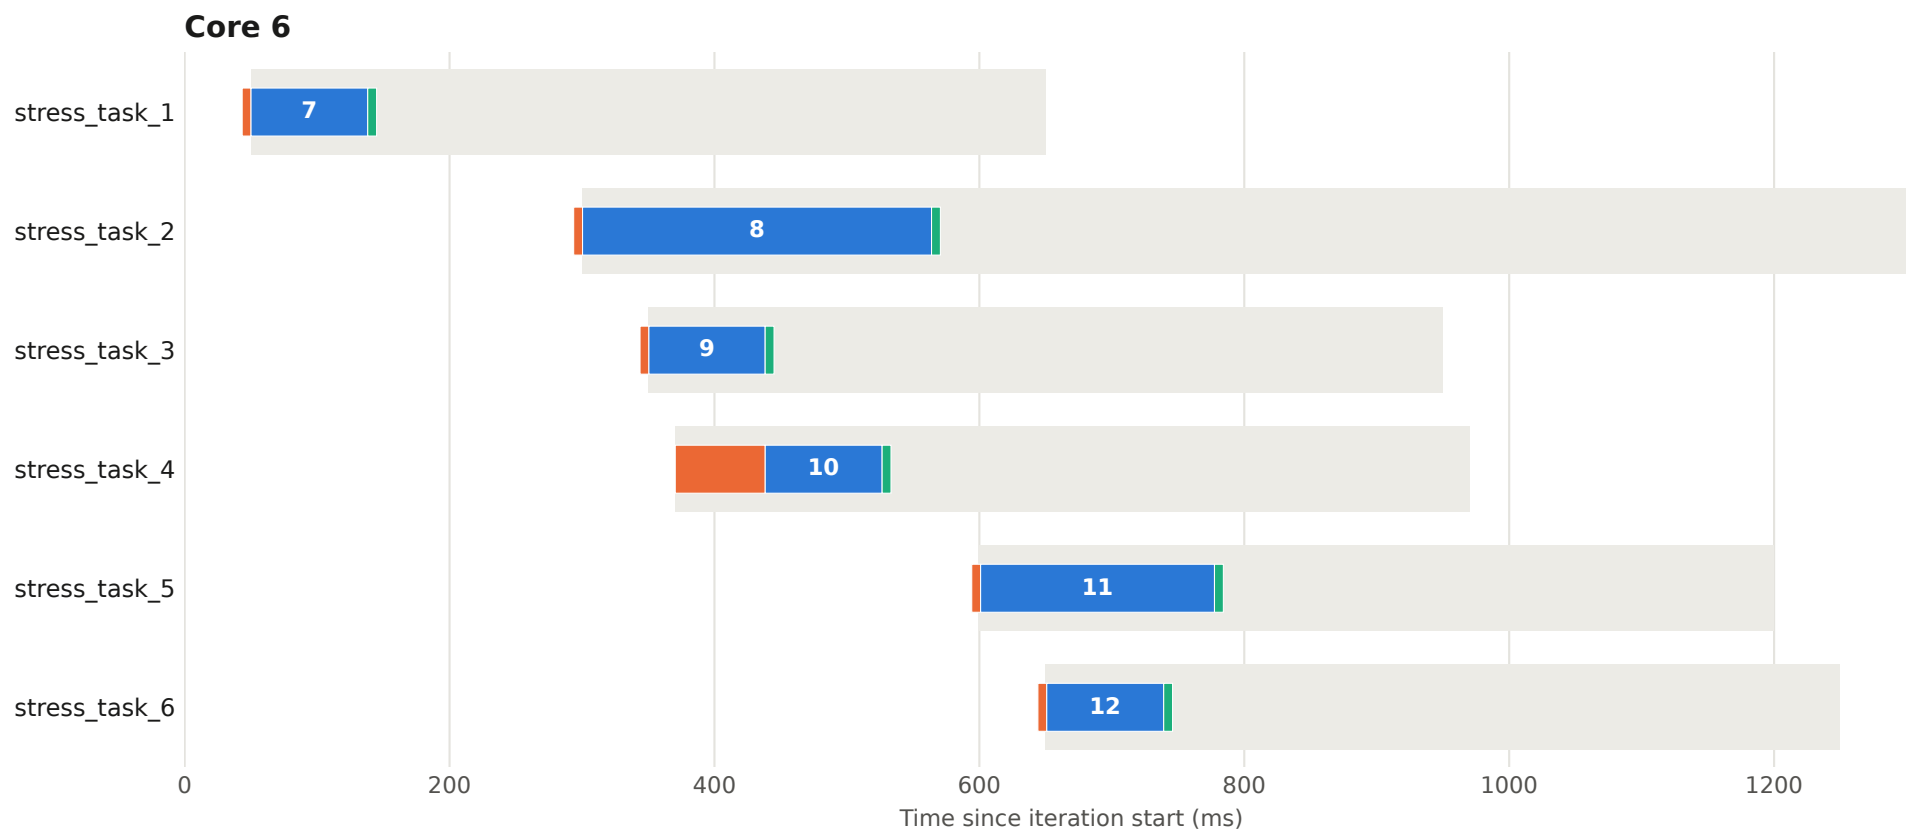


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 89 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

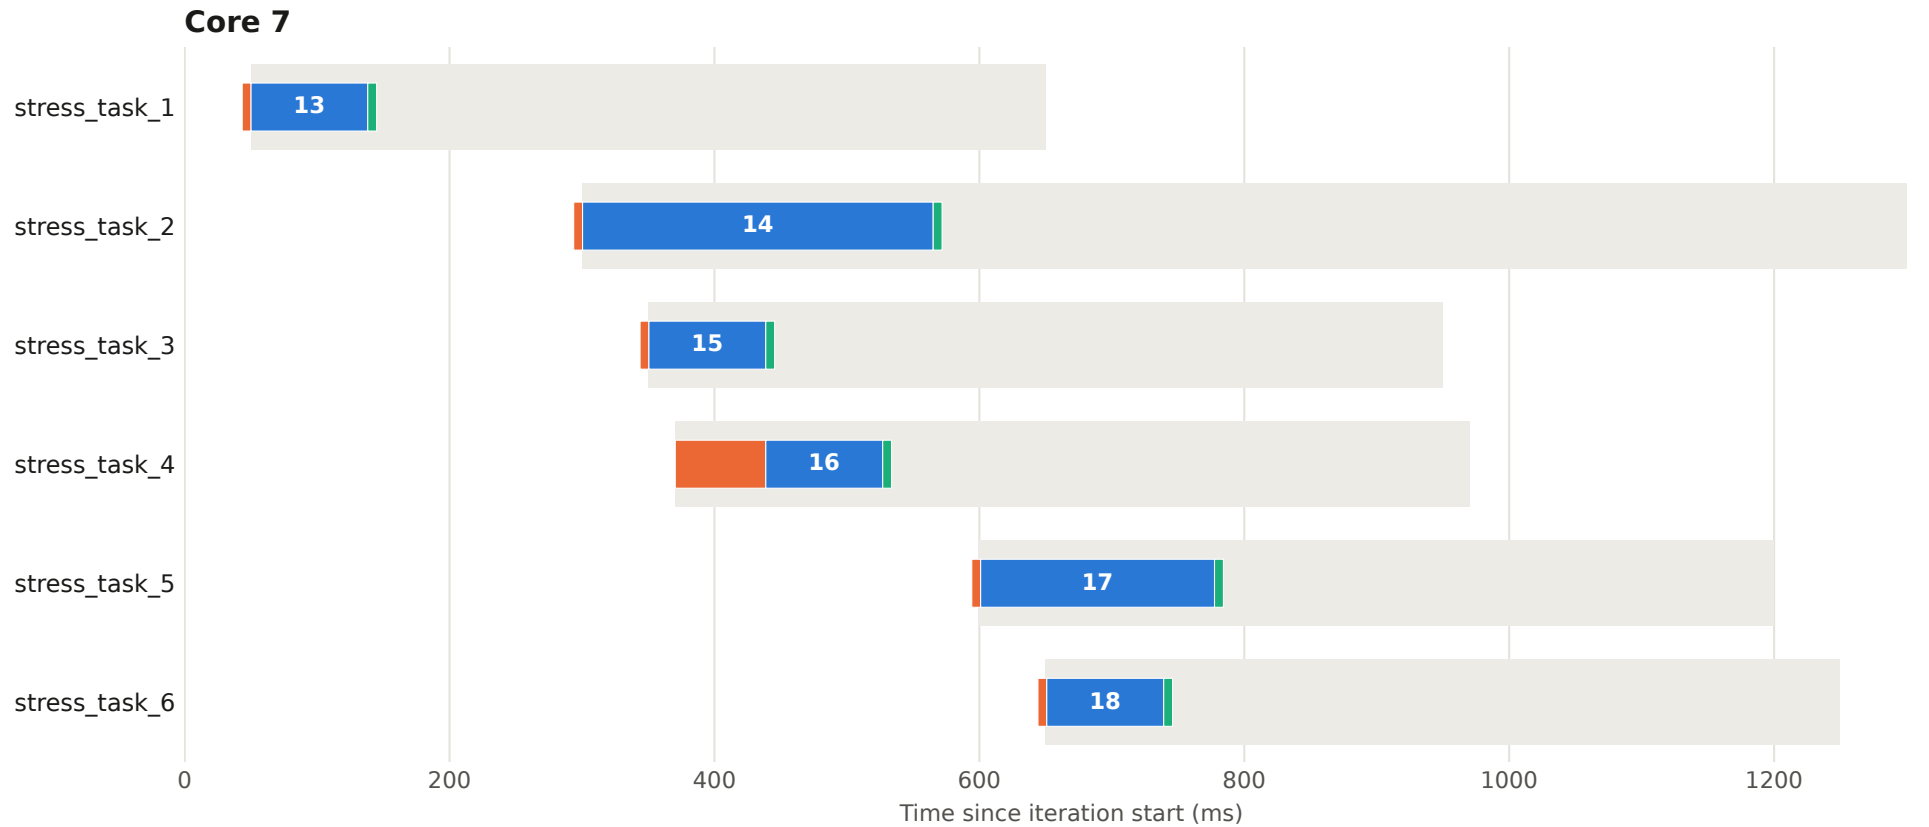


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 90 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

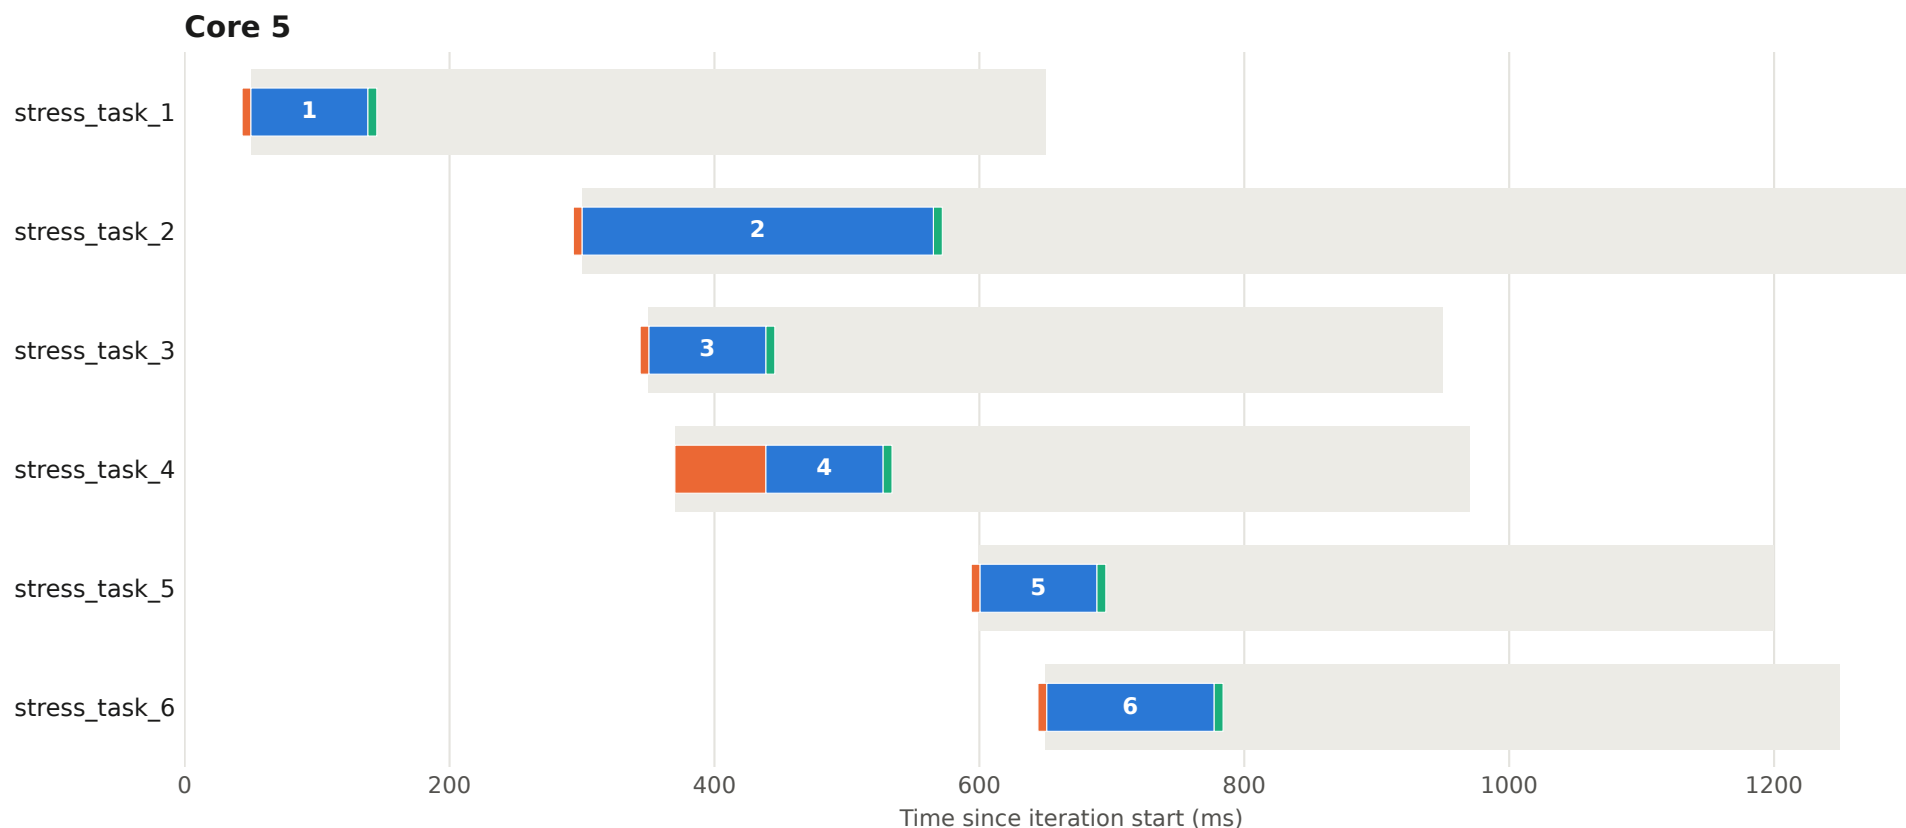


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 90 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

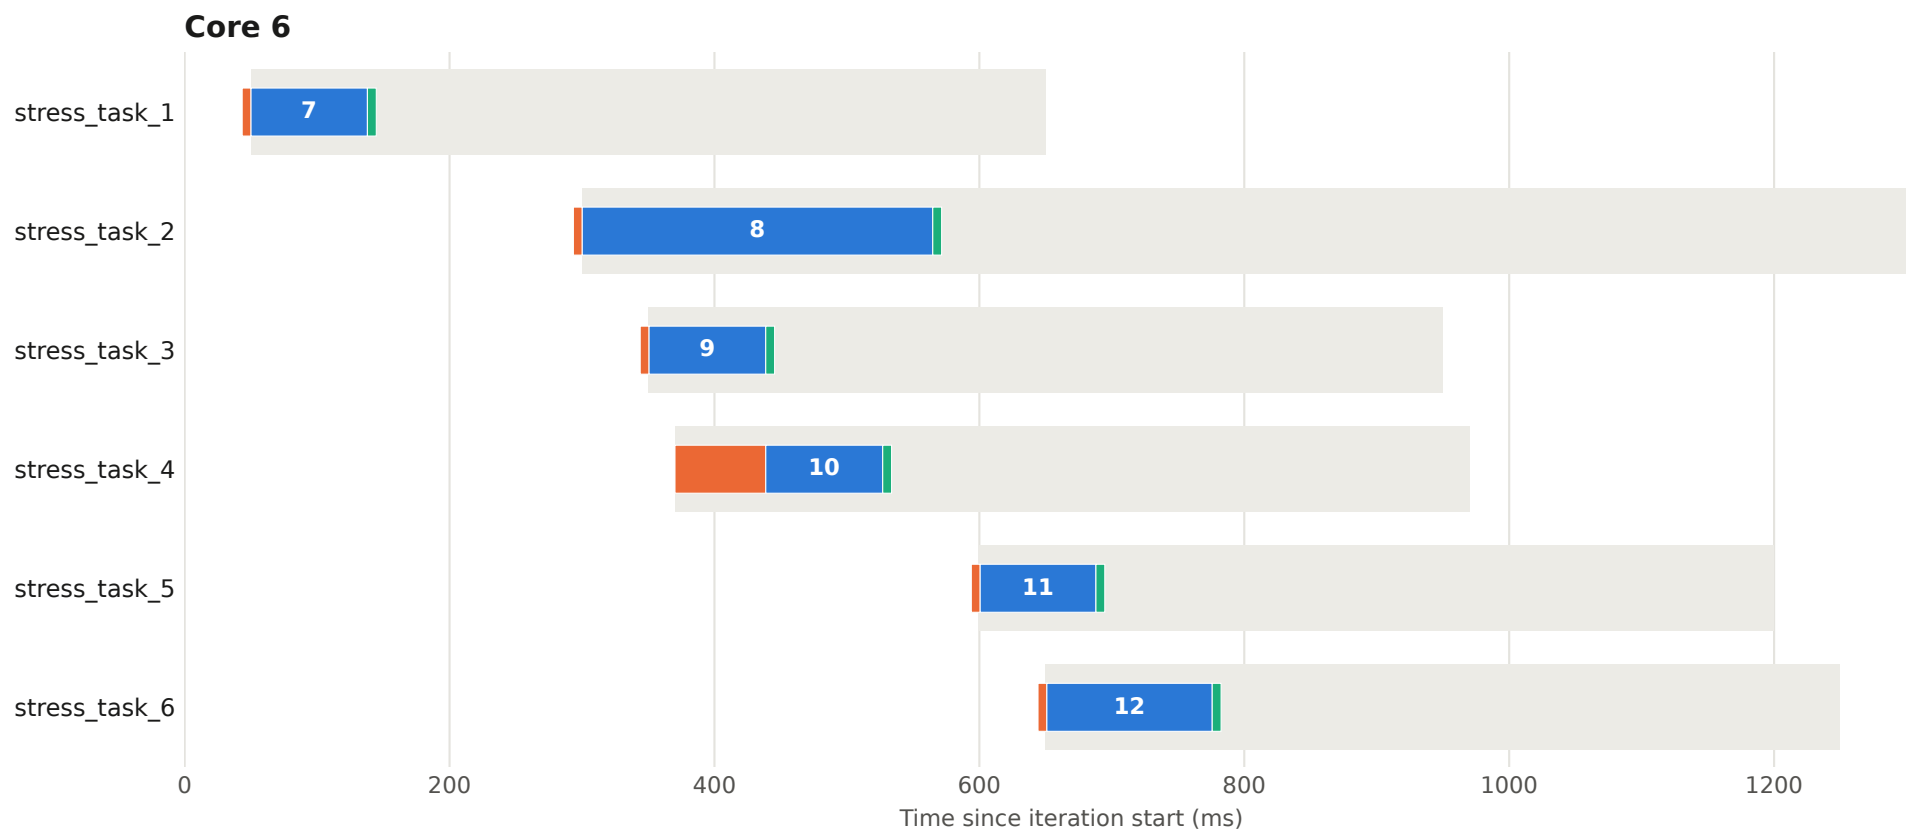


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 90 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

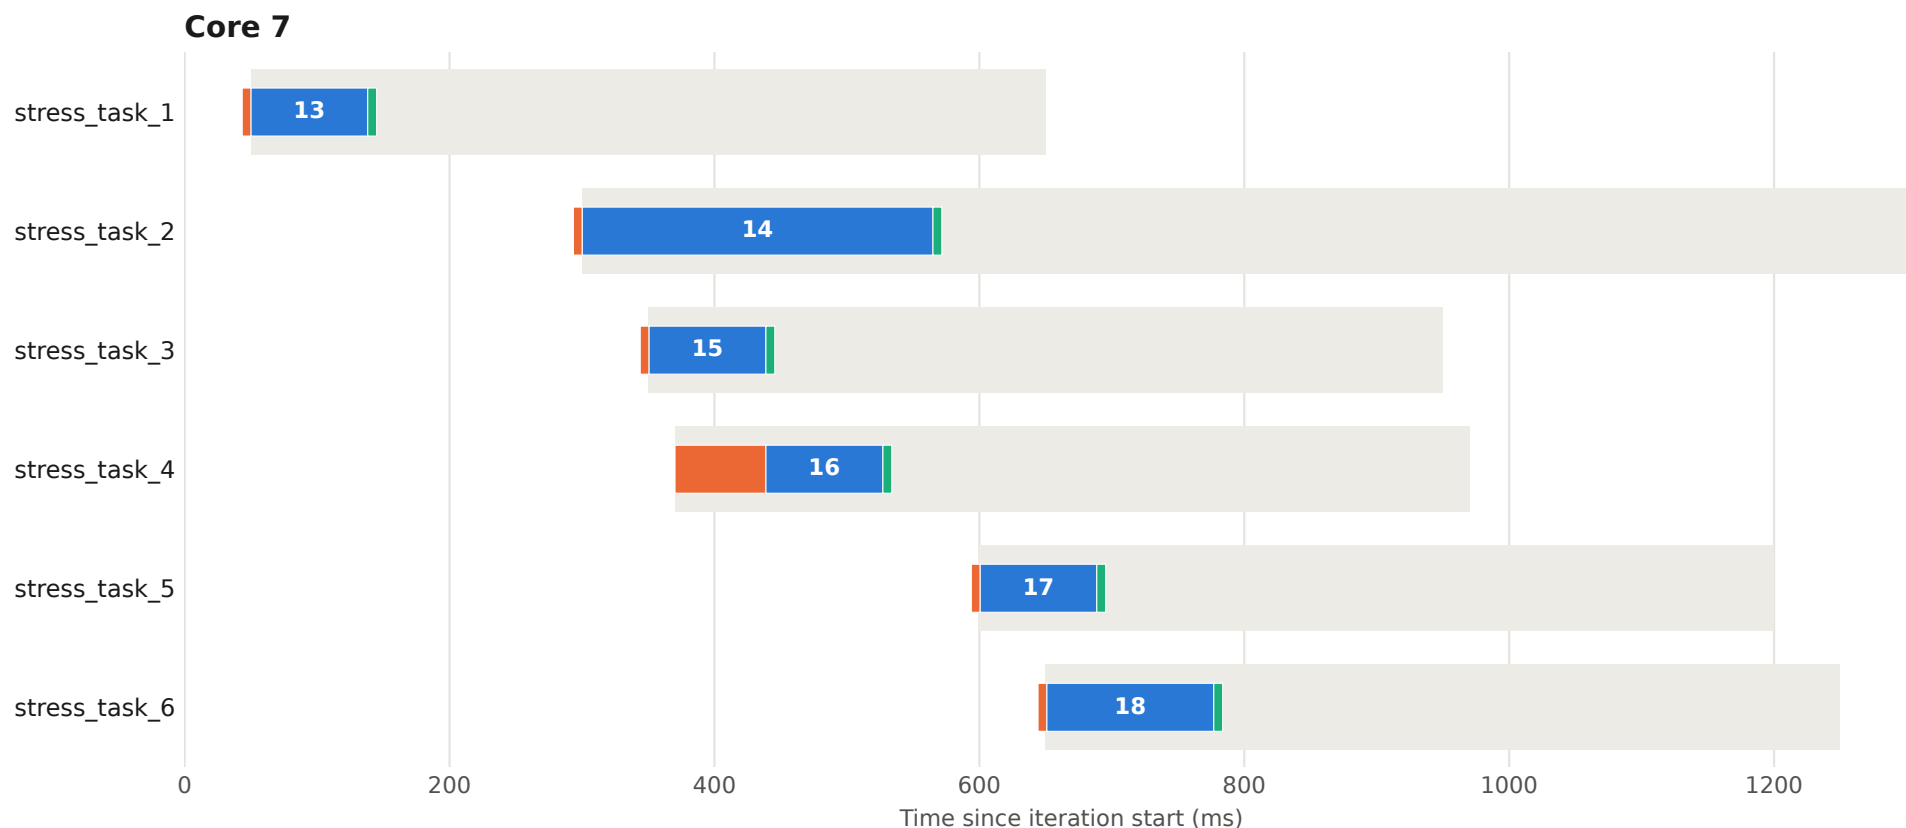


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 91 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

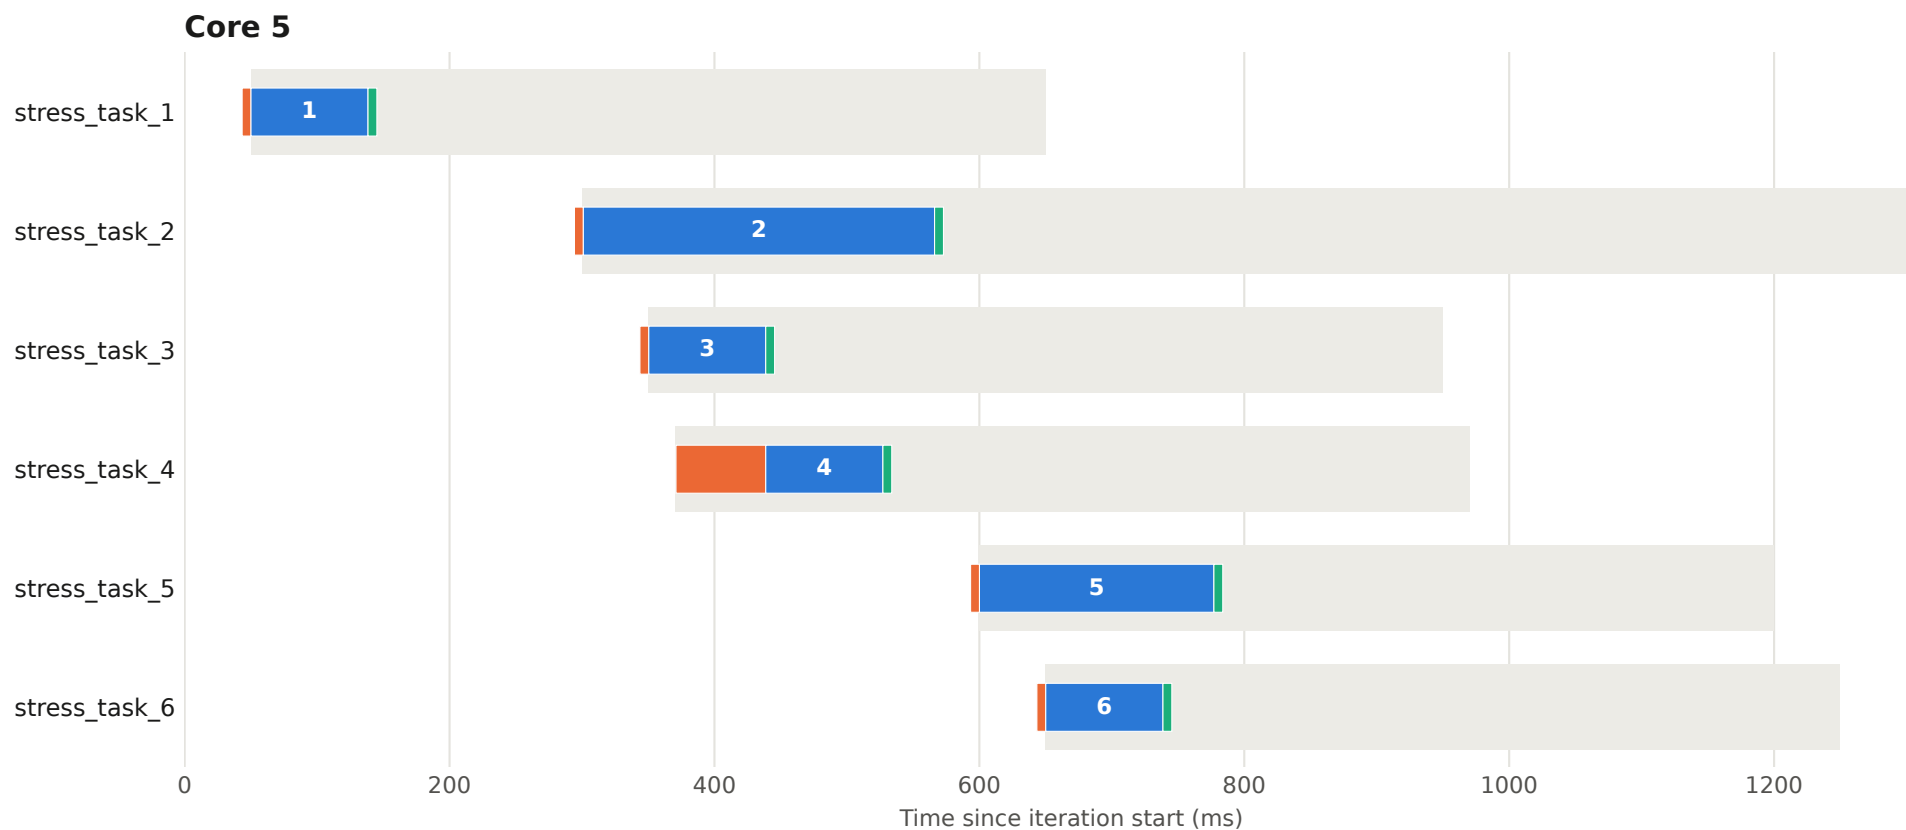


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 91 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

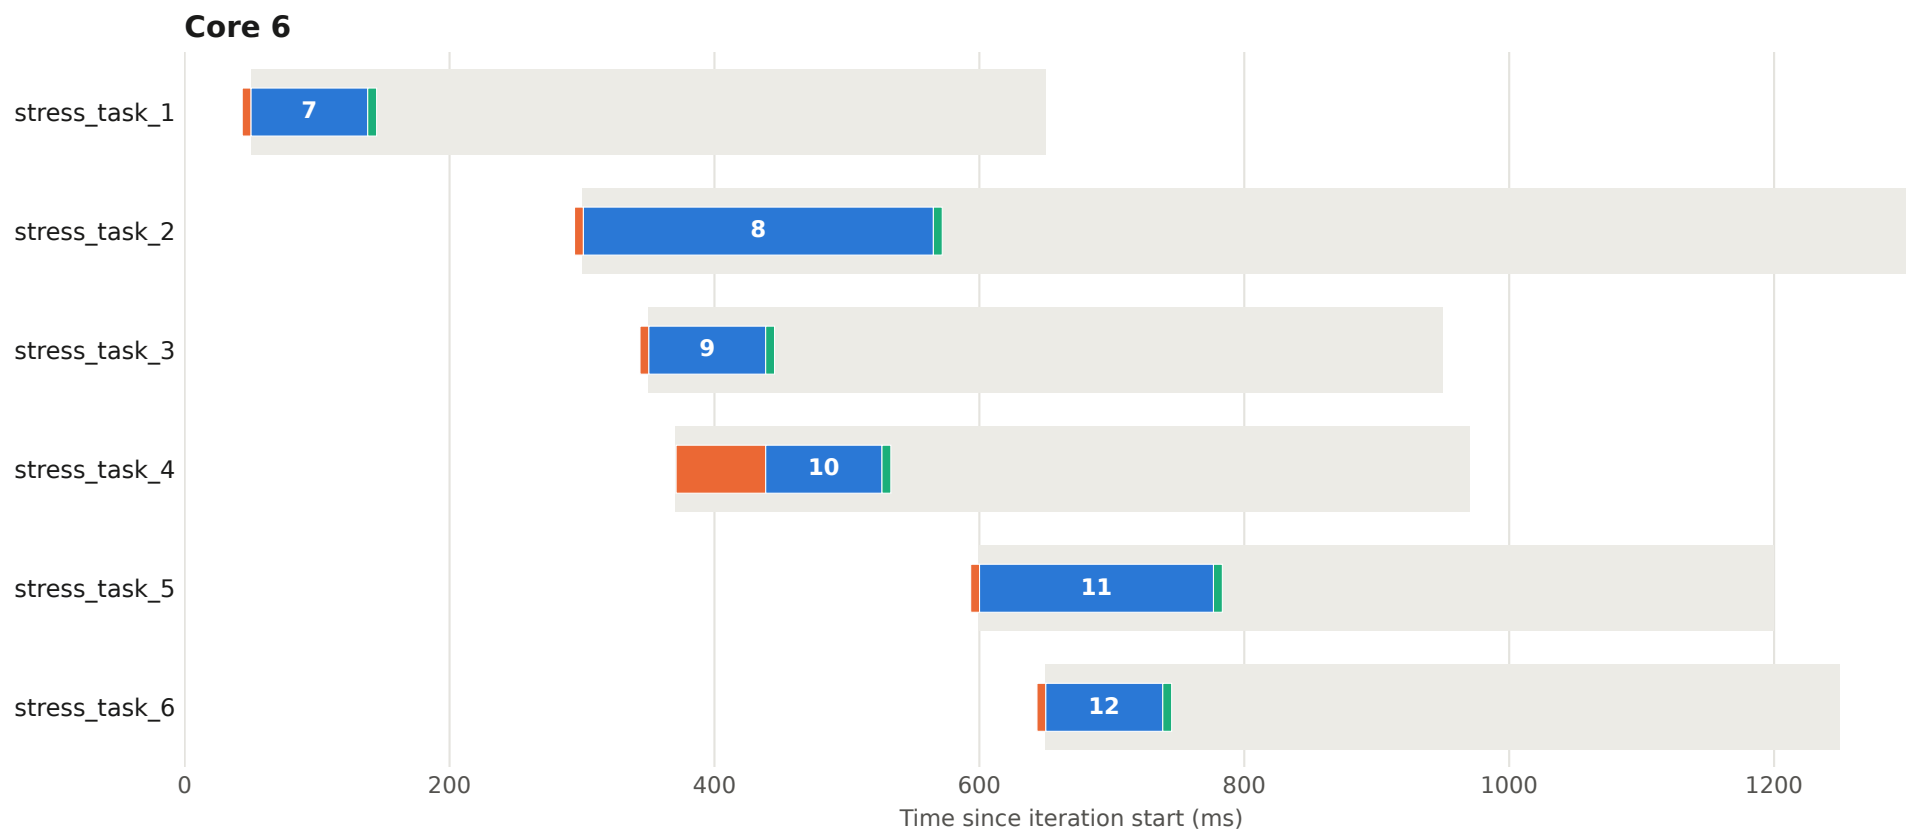


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 91 - core 7

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

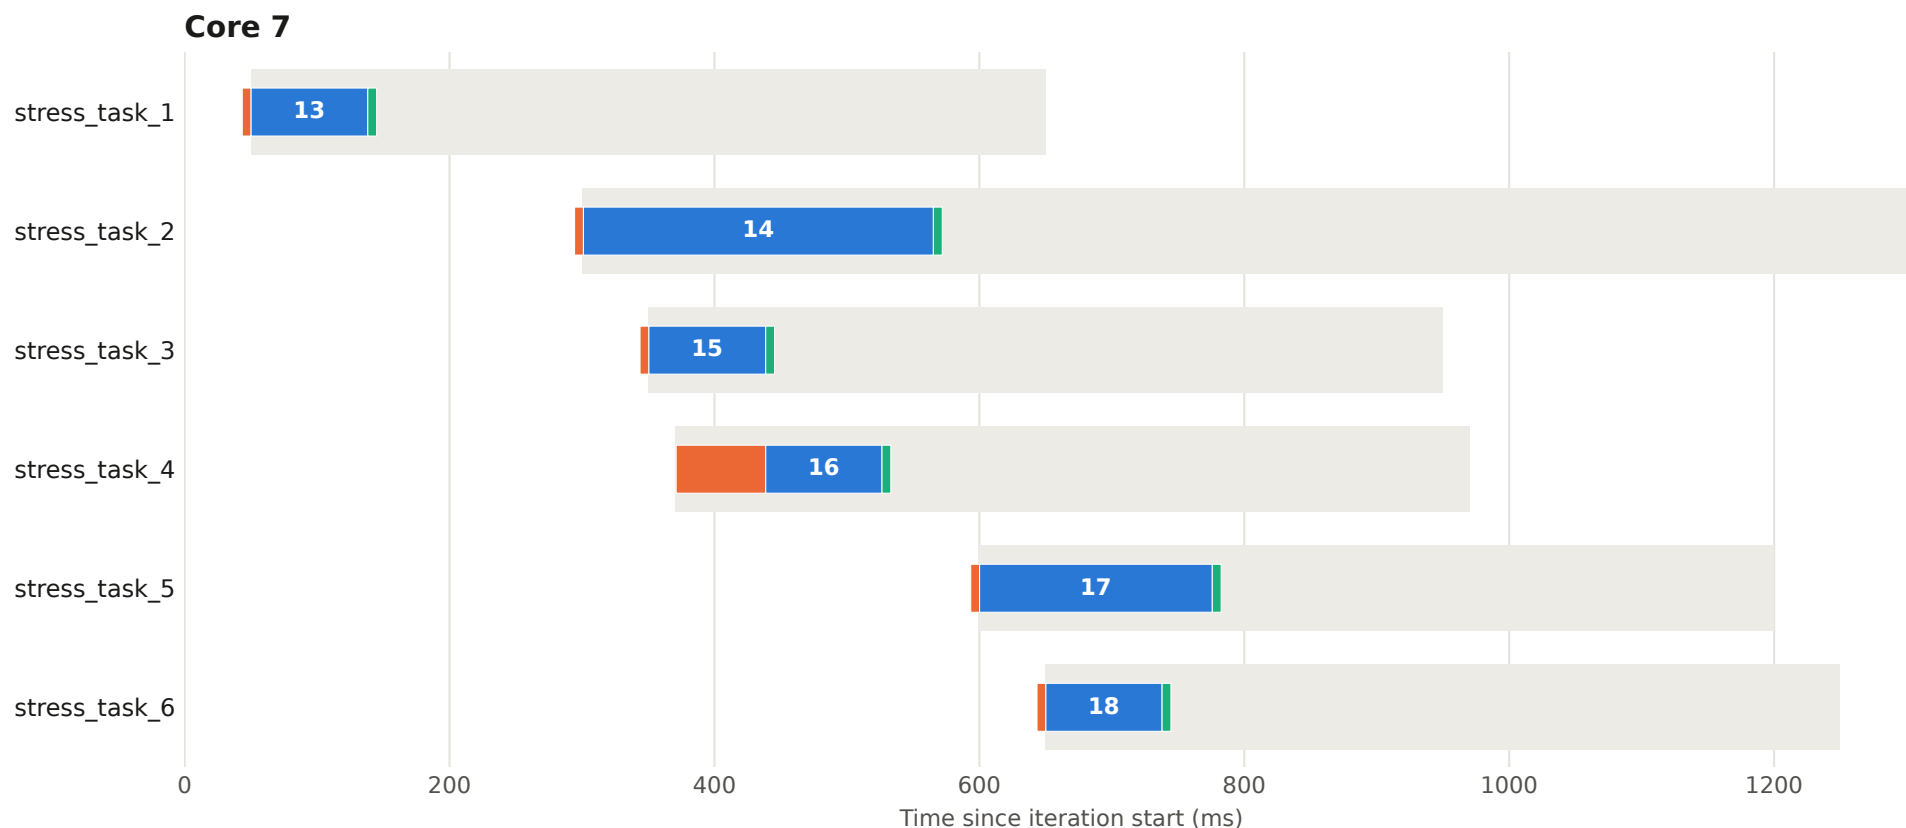

Execution plan - iteration 92 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

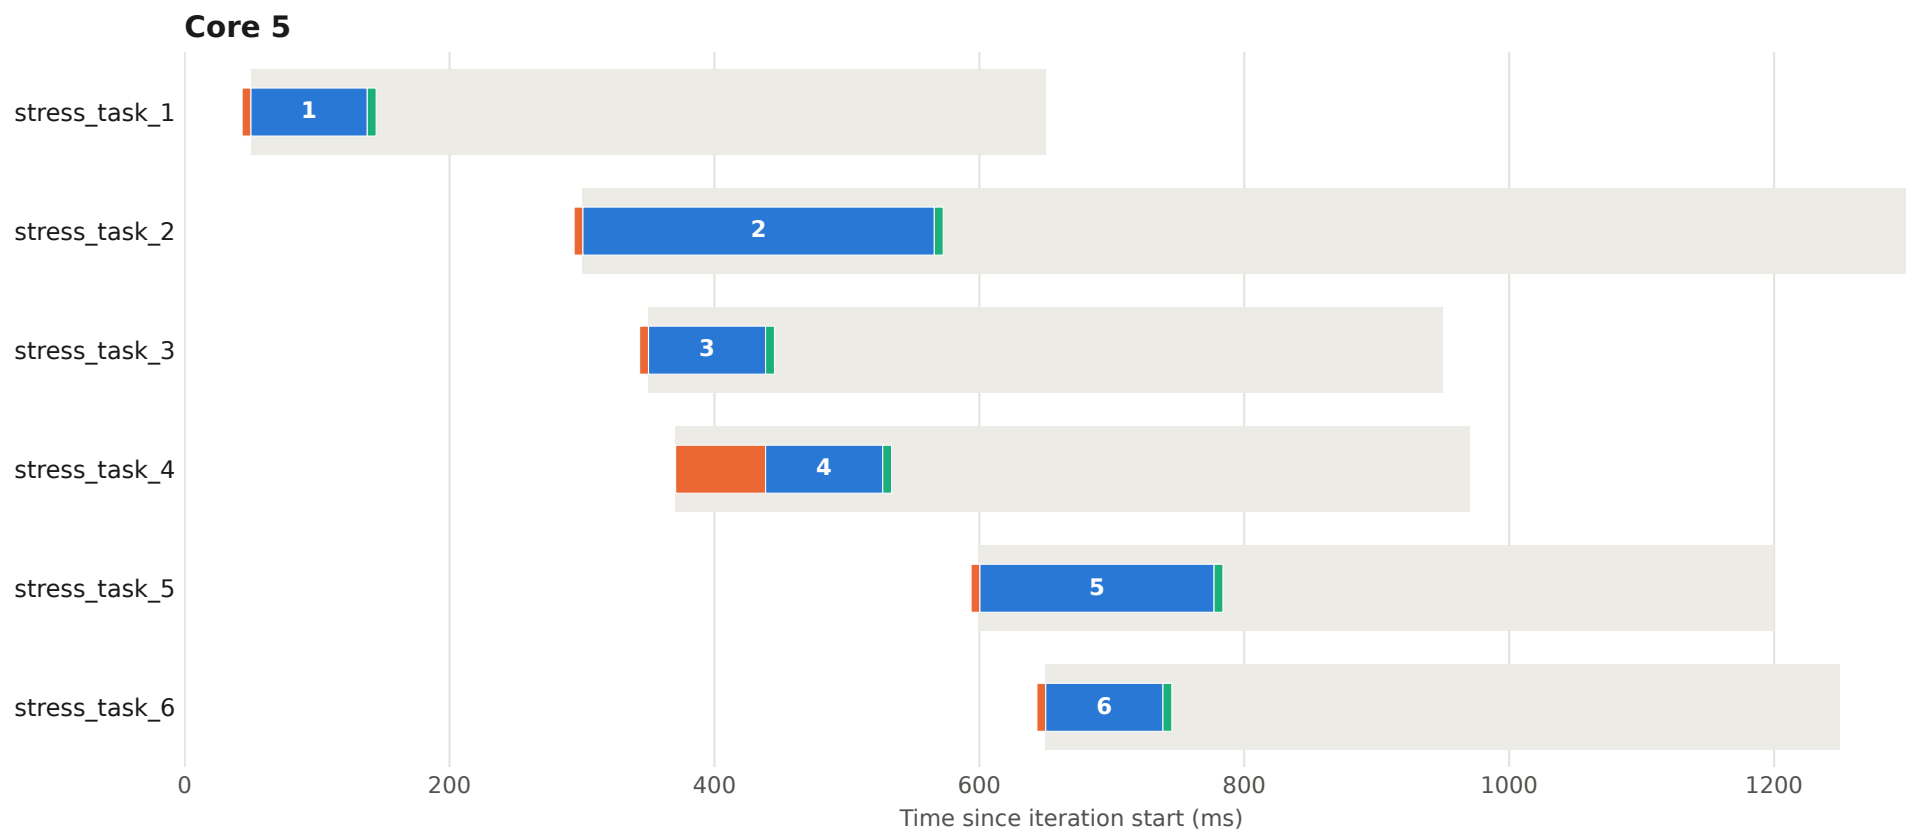


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 92 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

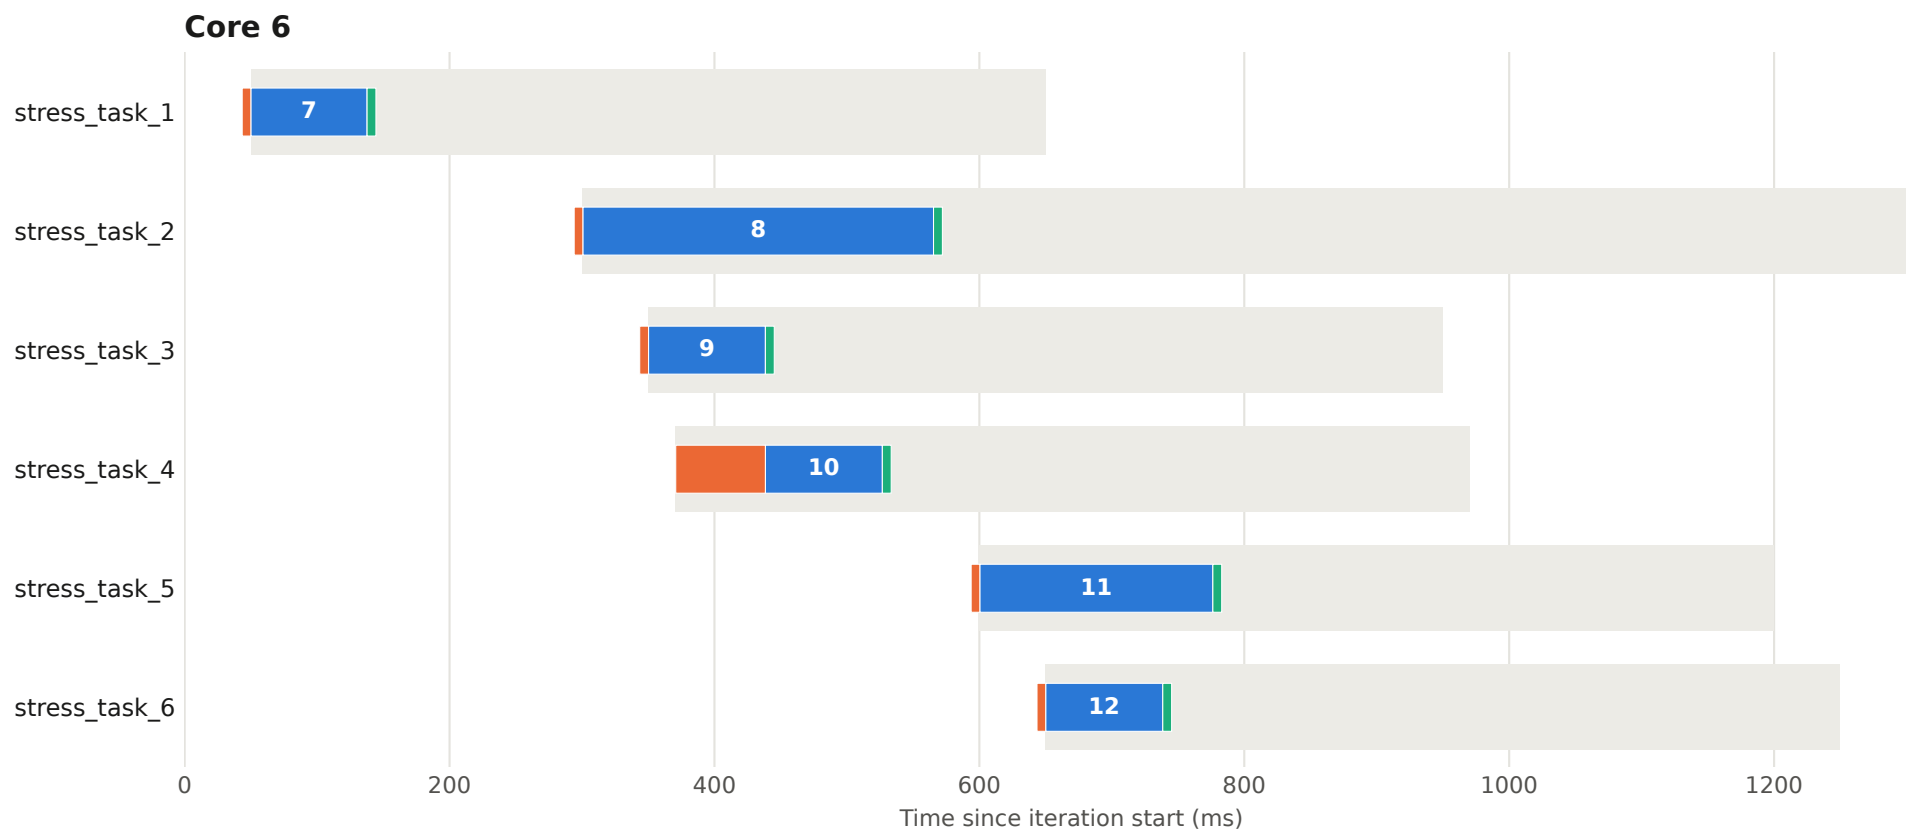


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 92 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

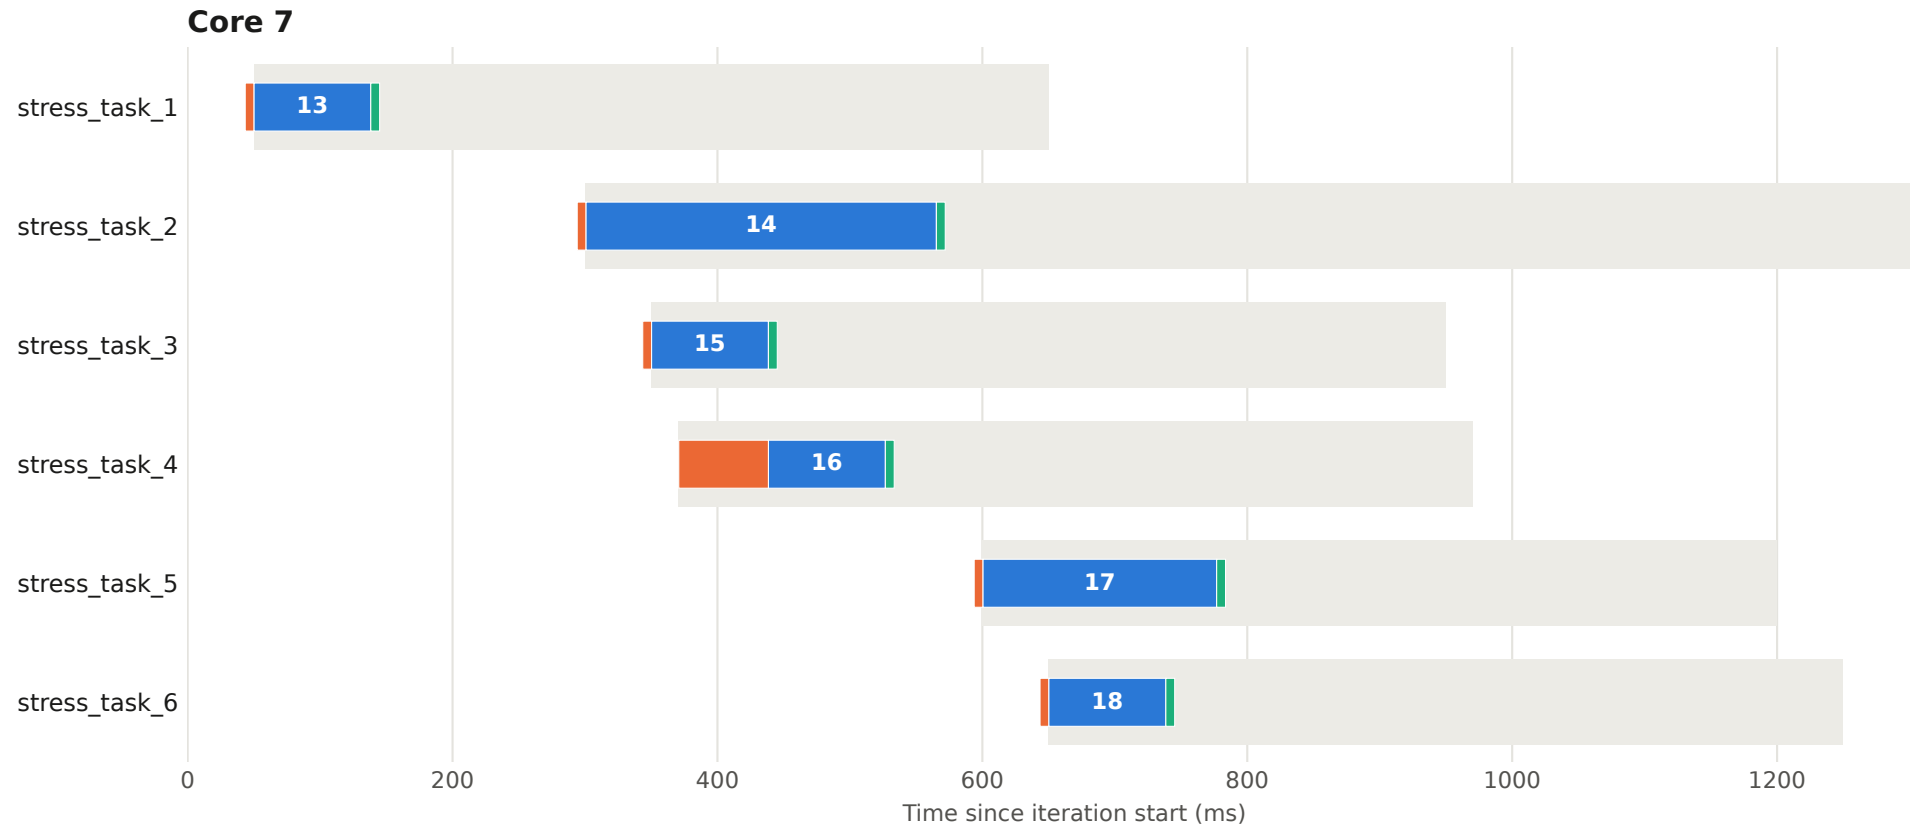


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 93 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

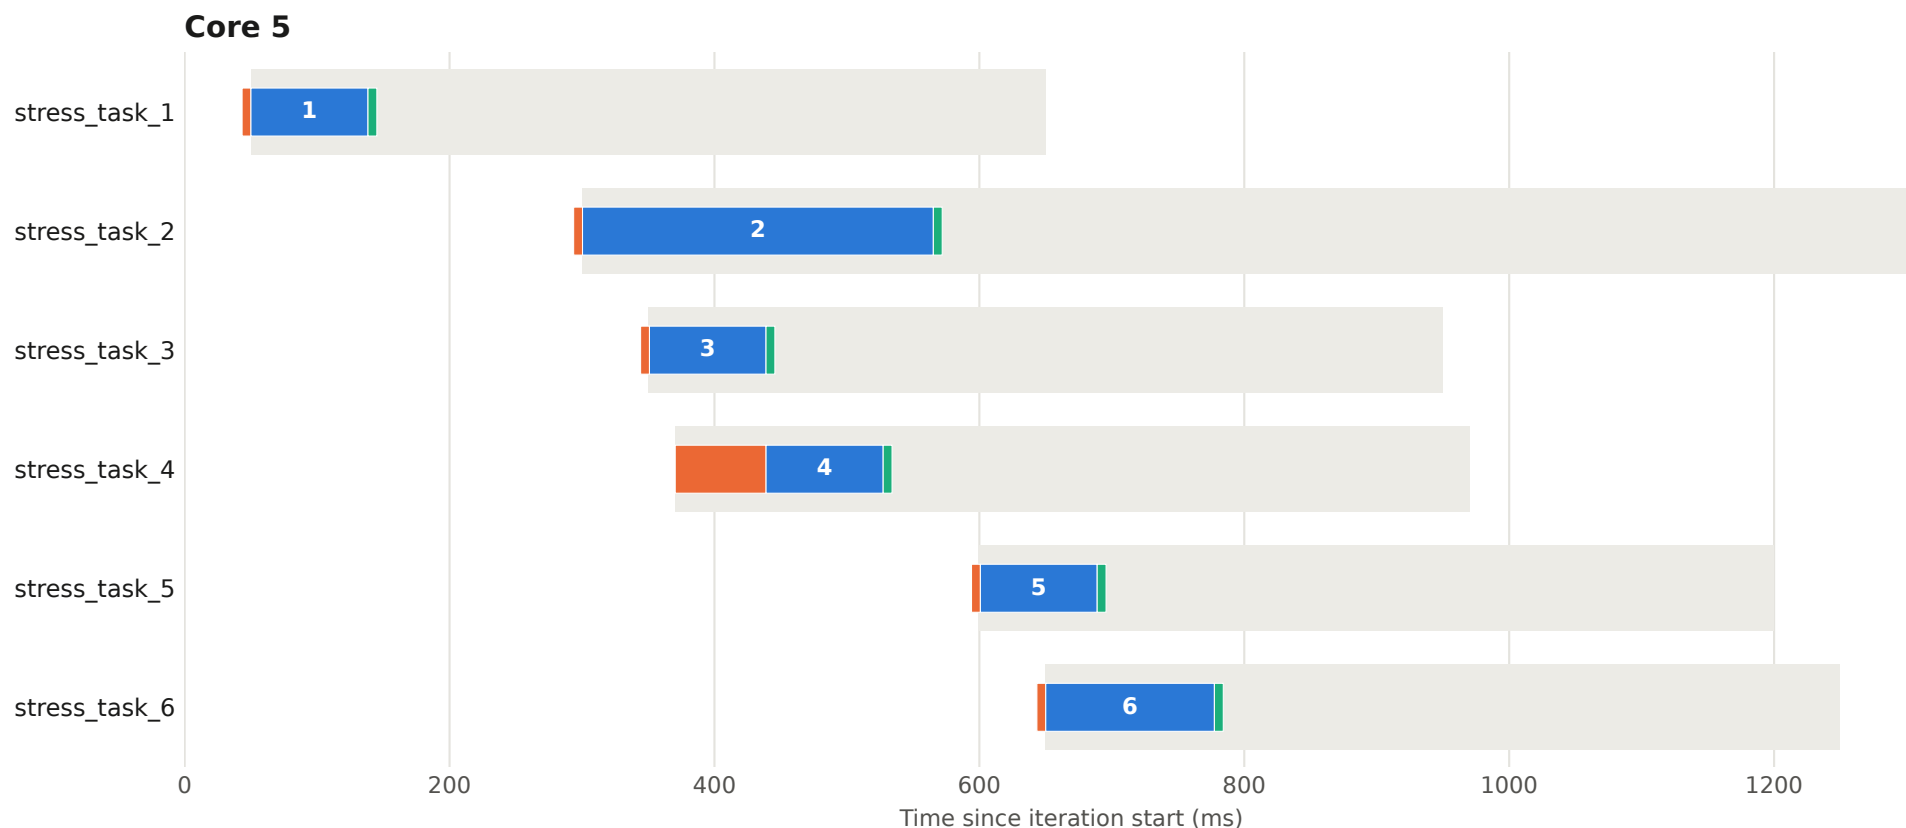


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 93 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

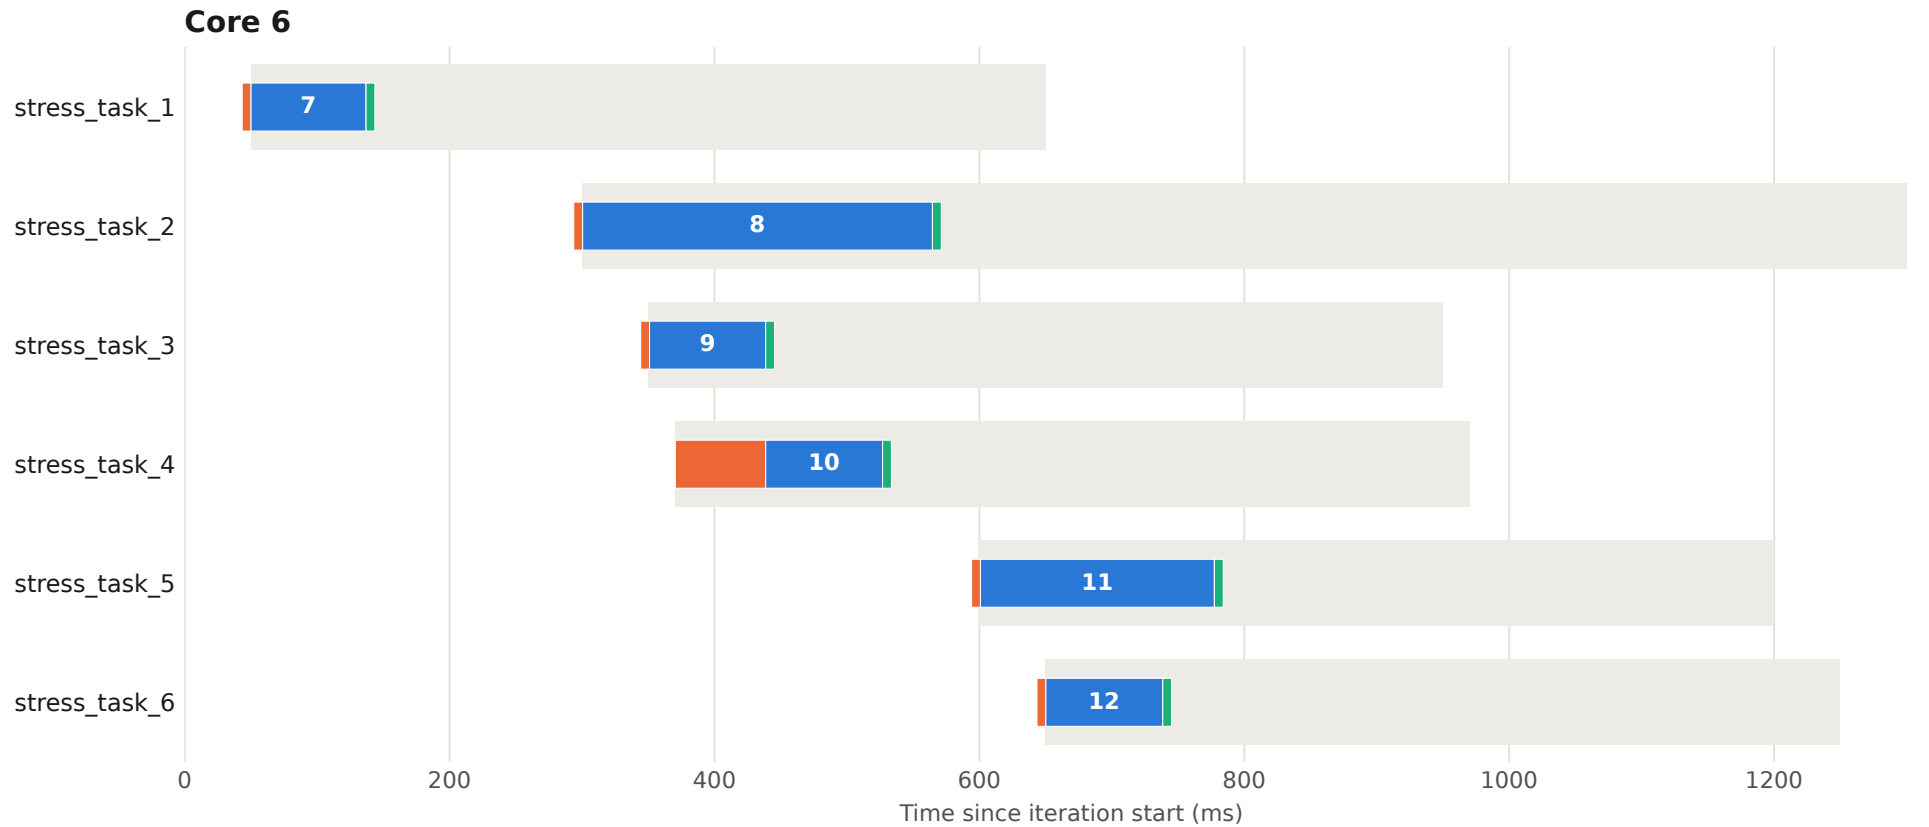


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 93 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

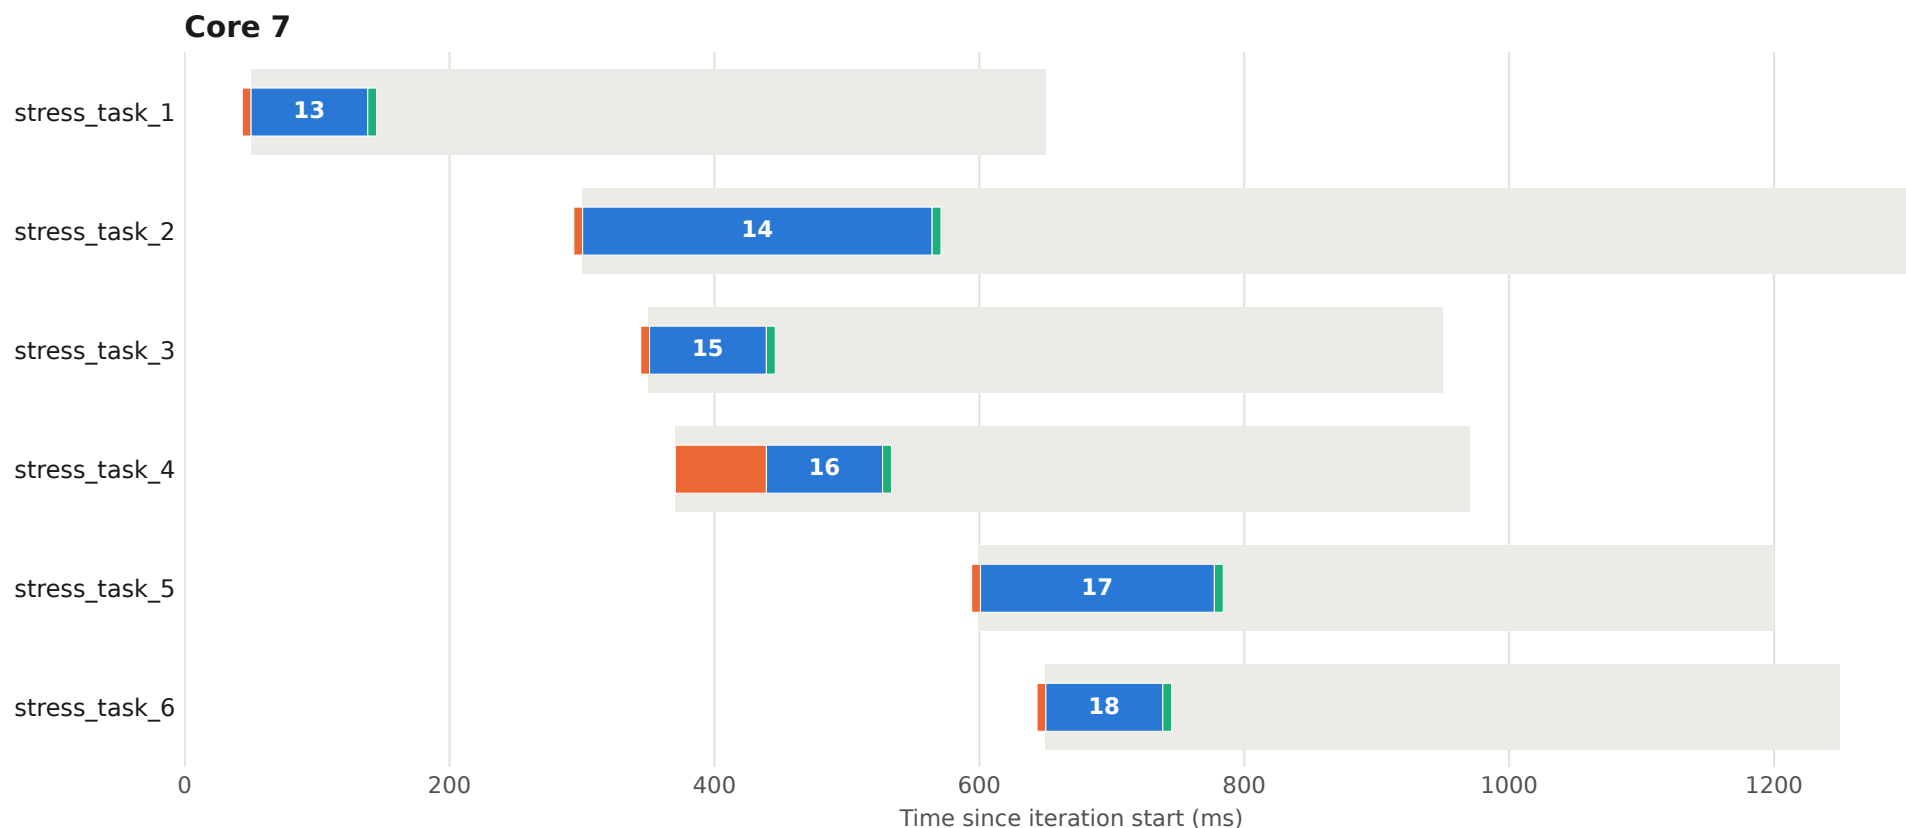


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 94 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

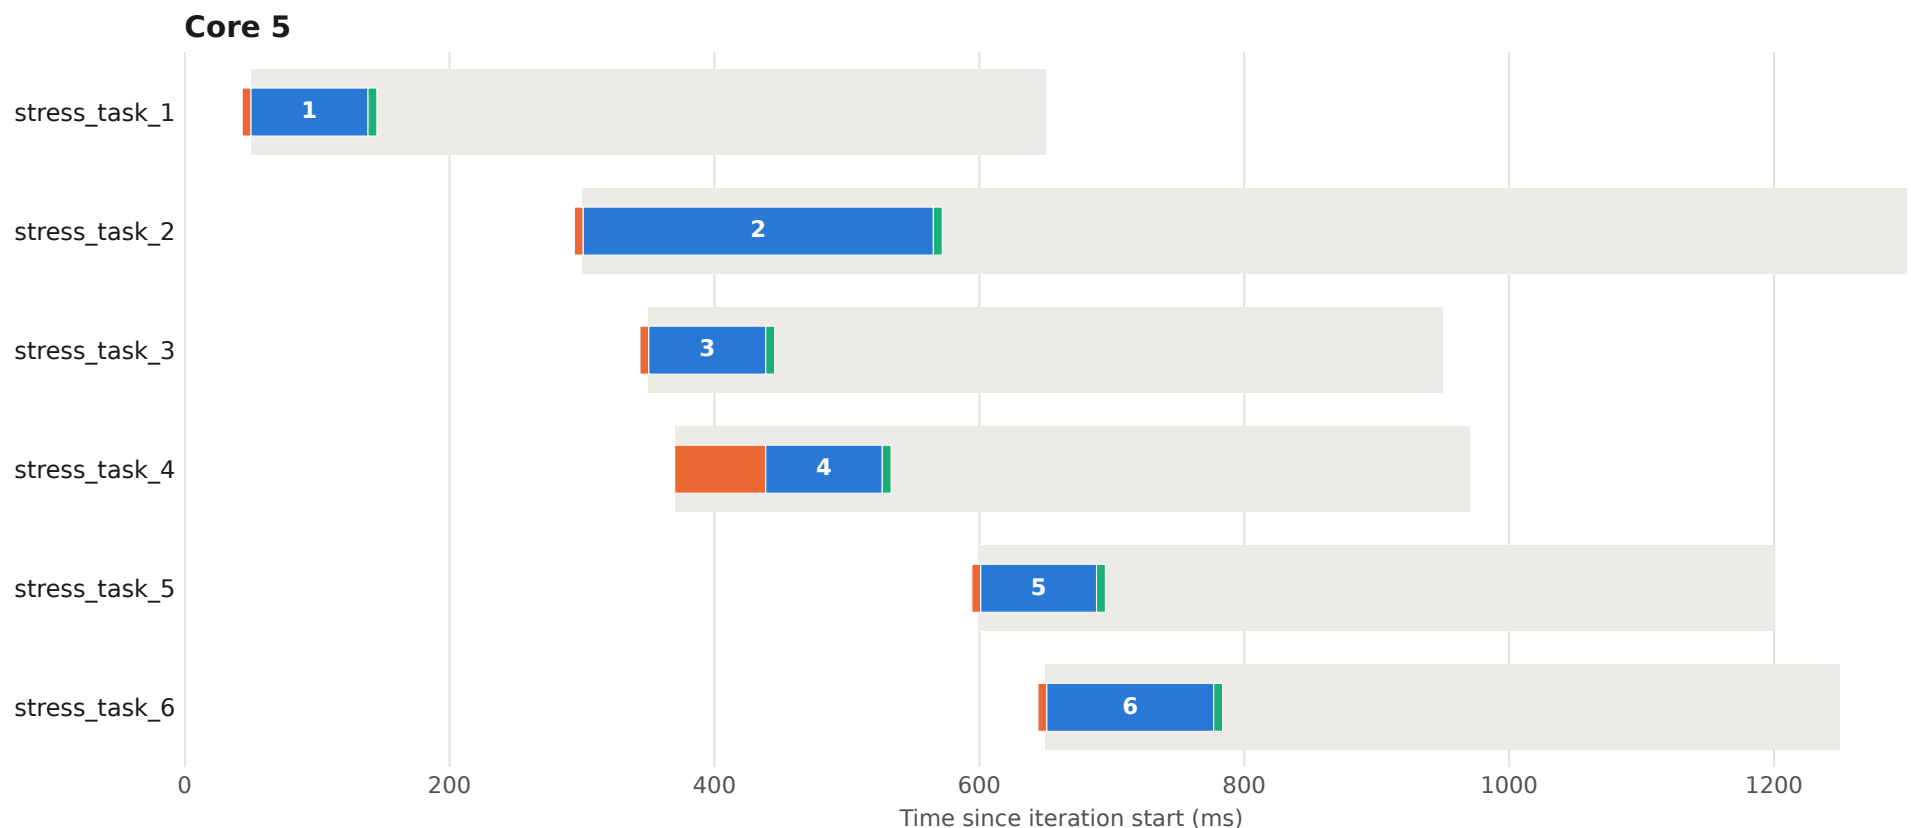


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 94 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

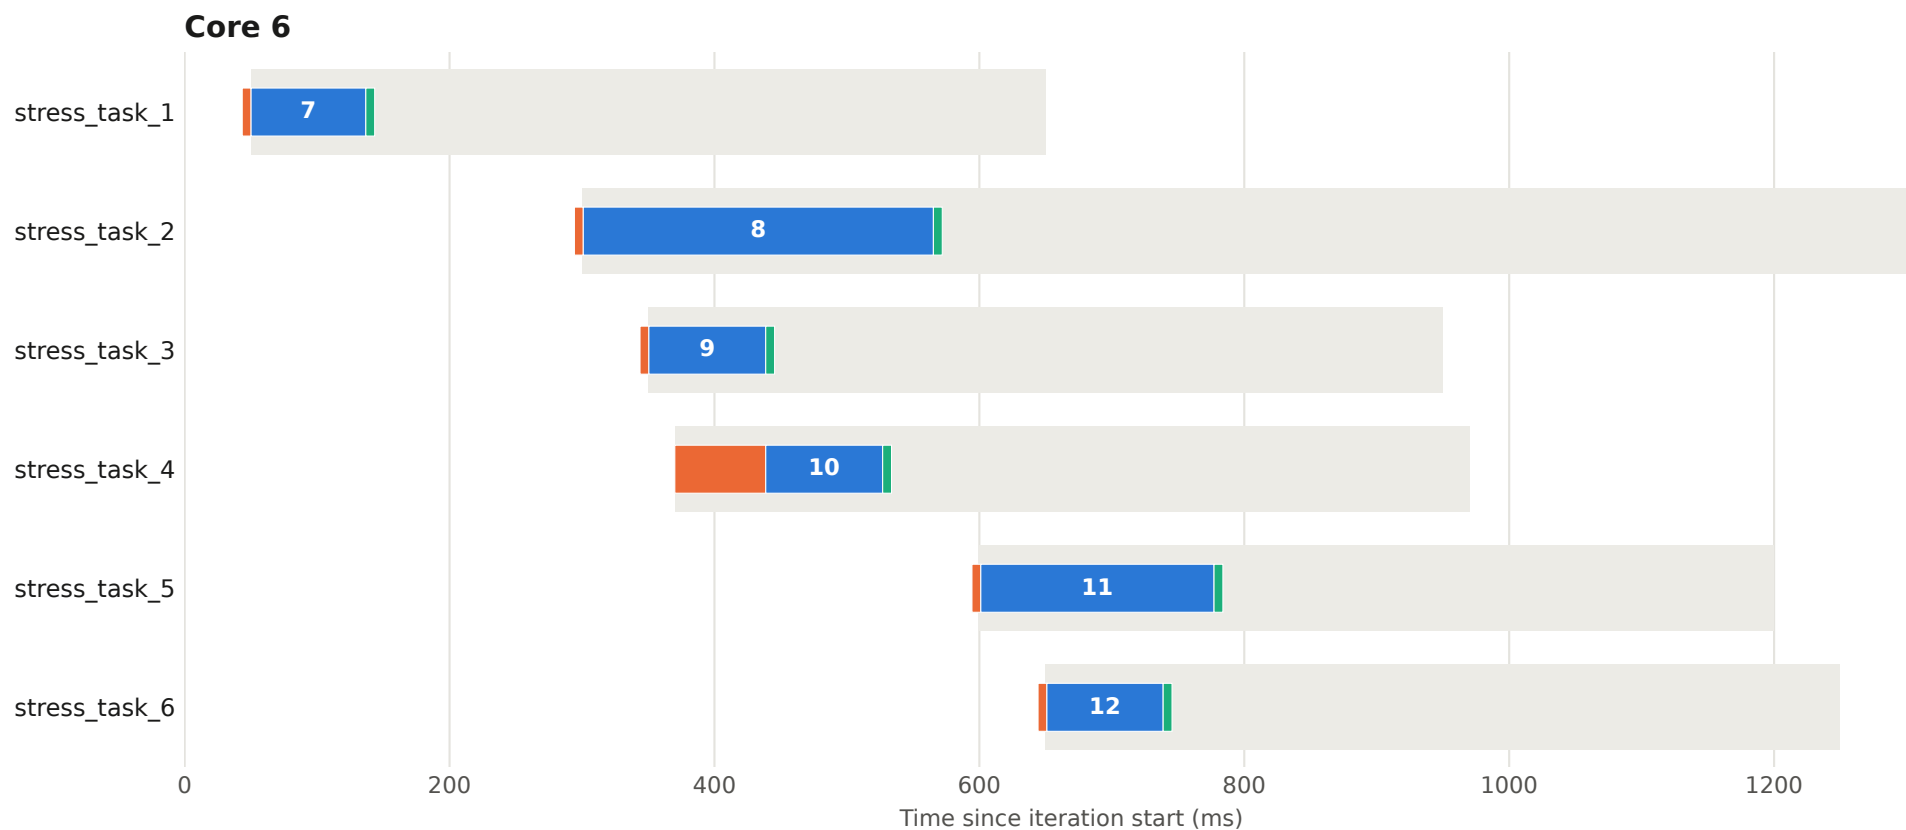


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 94 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

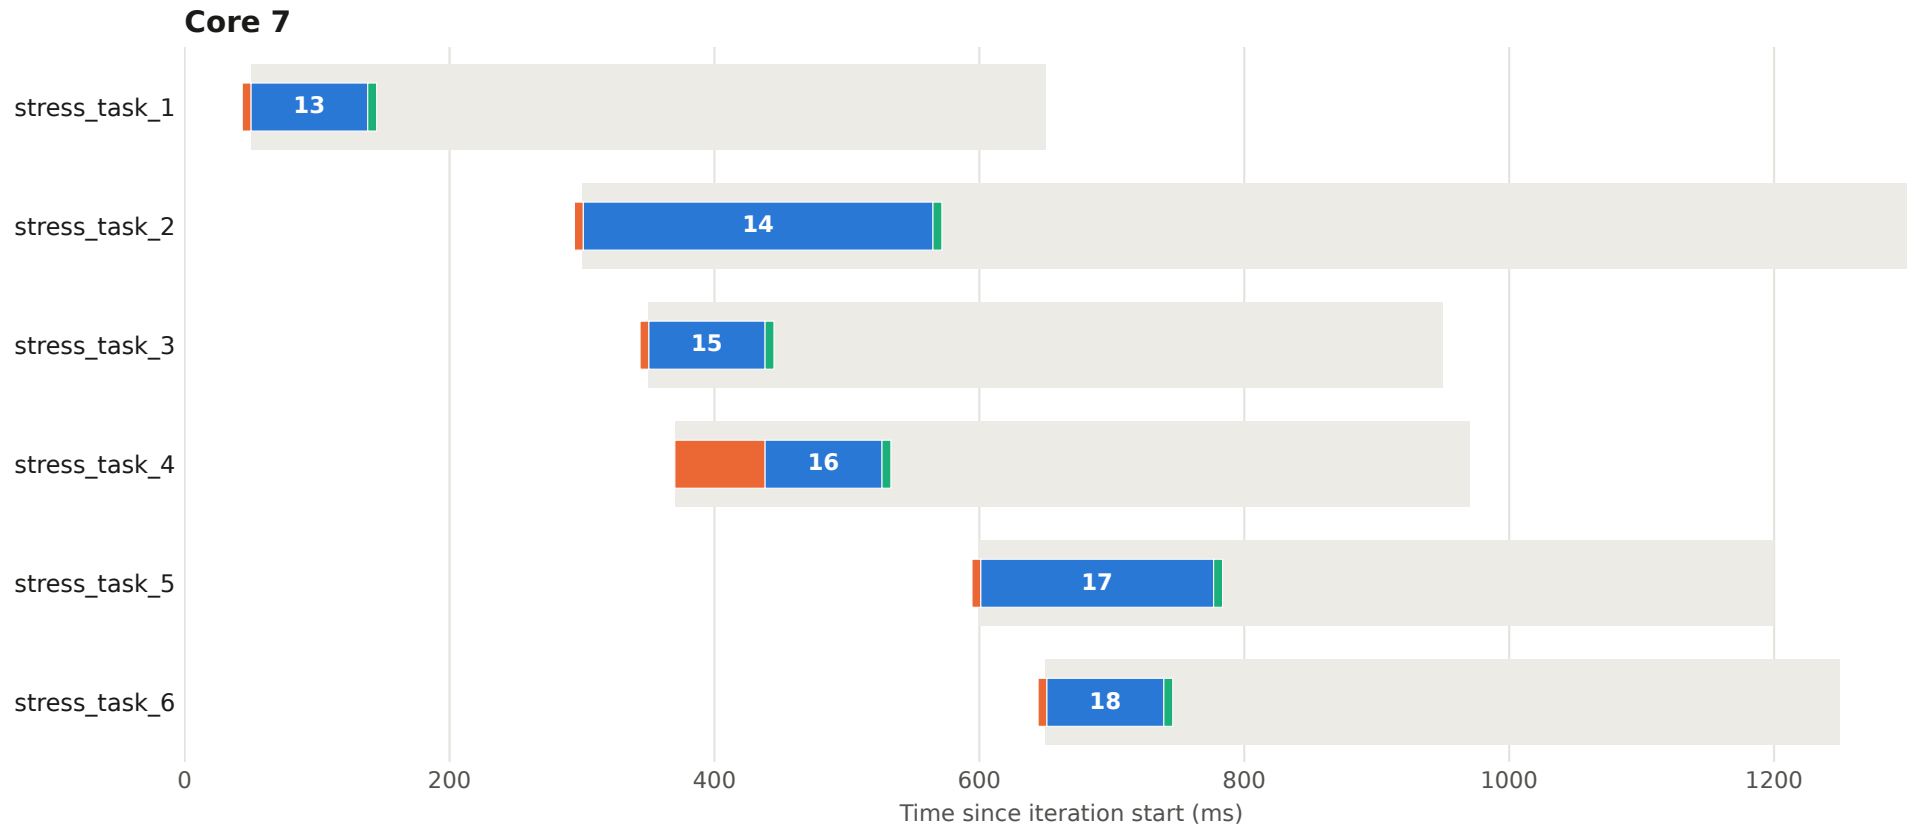


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 95 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

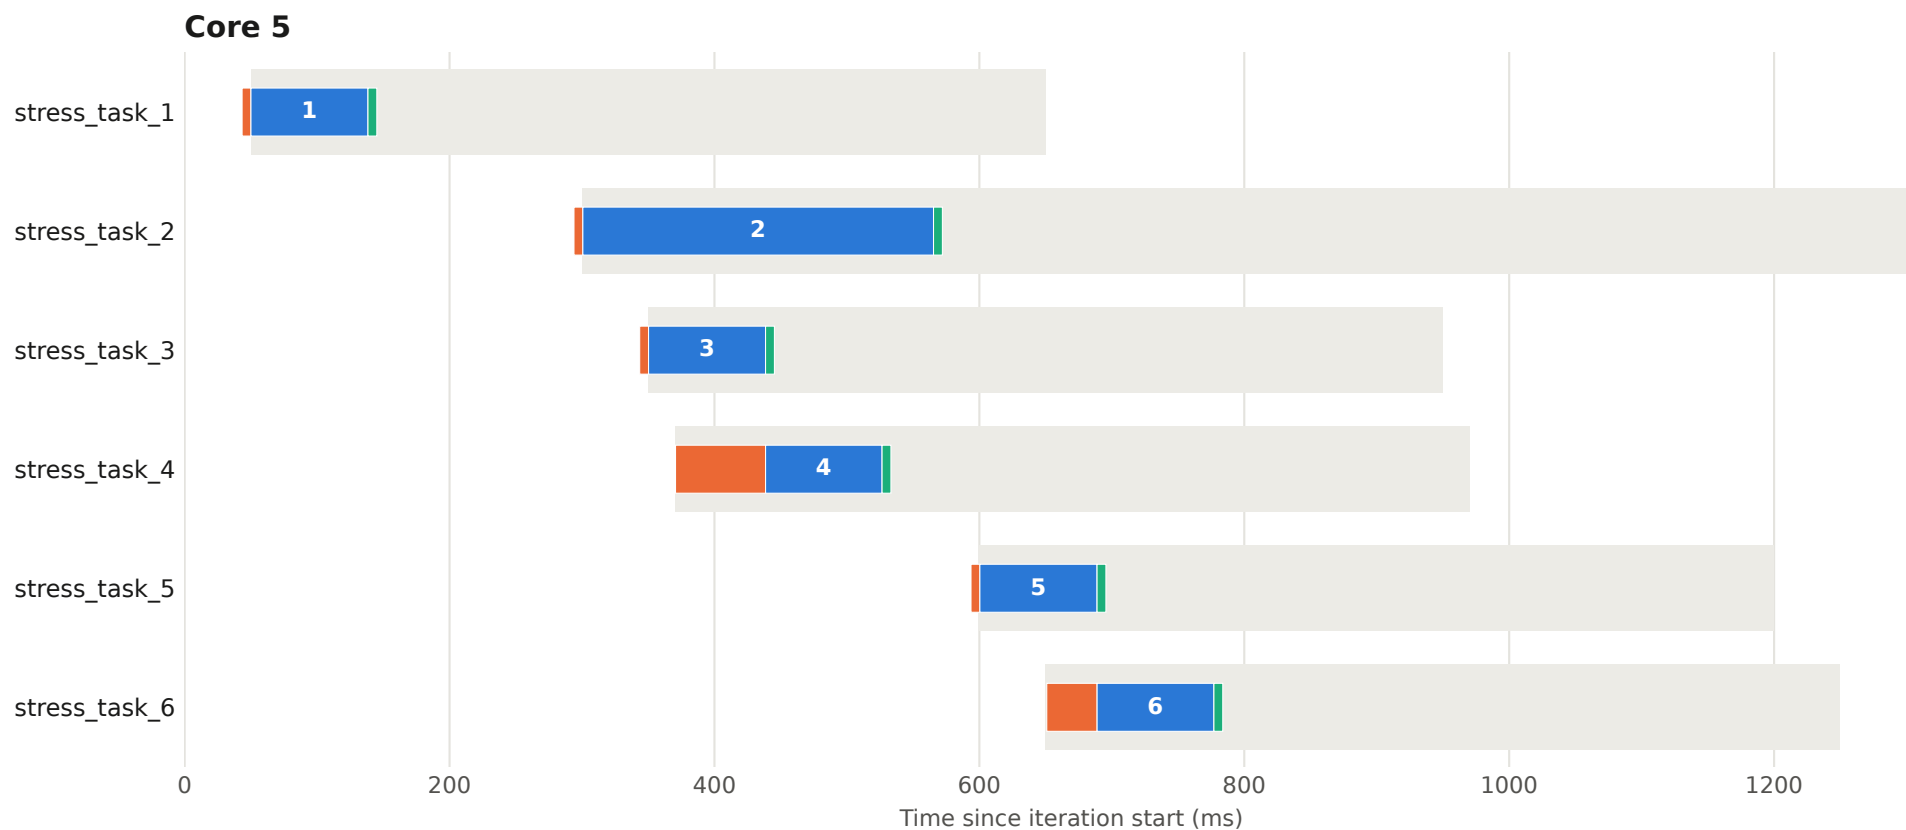


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 95 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

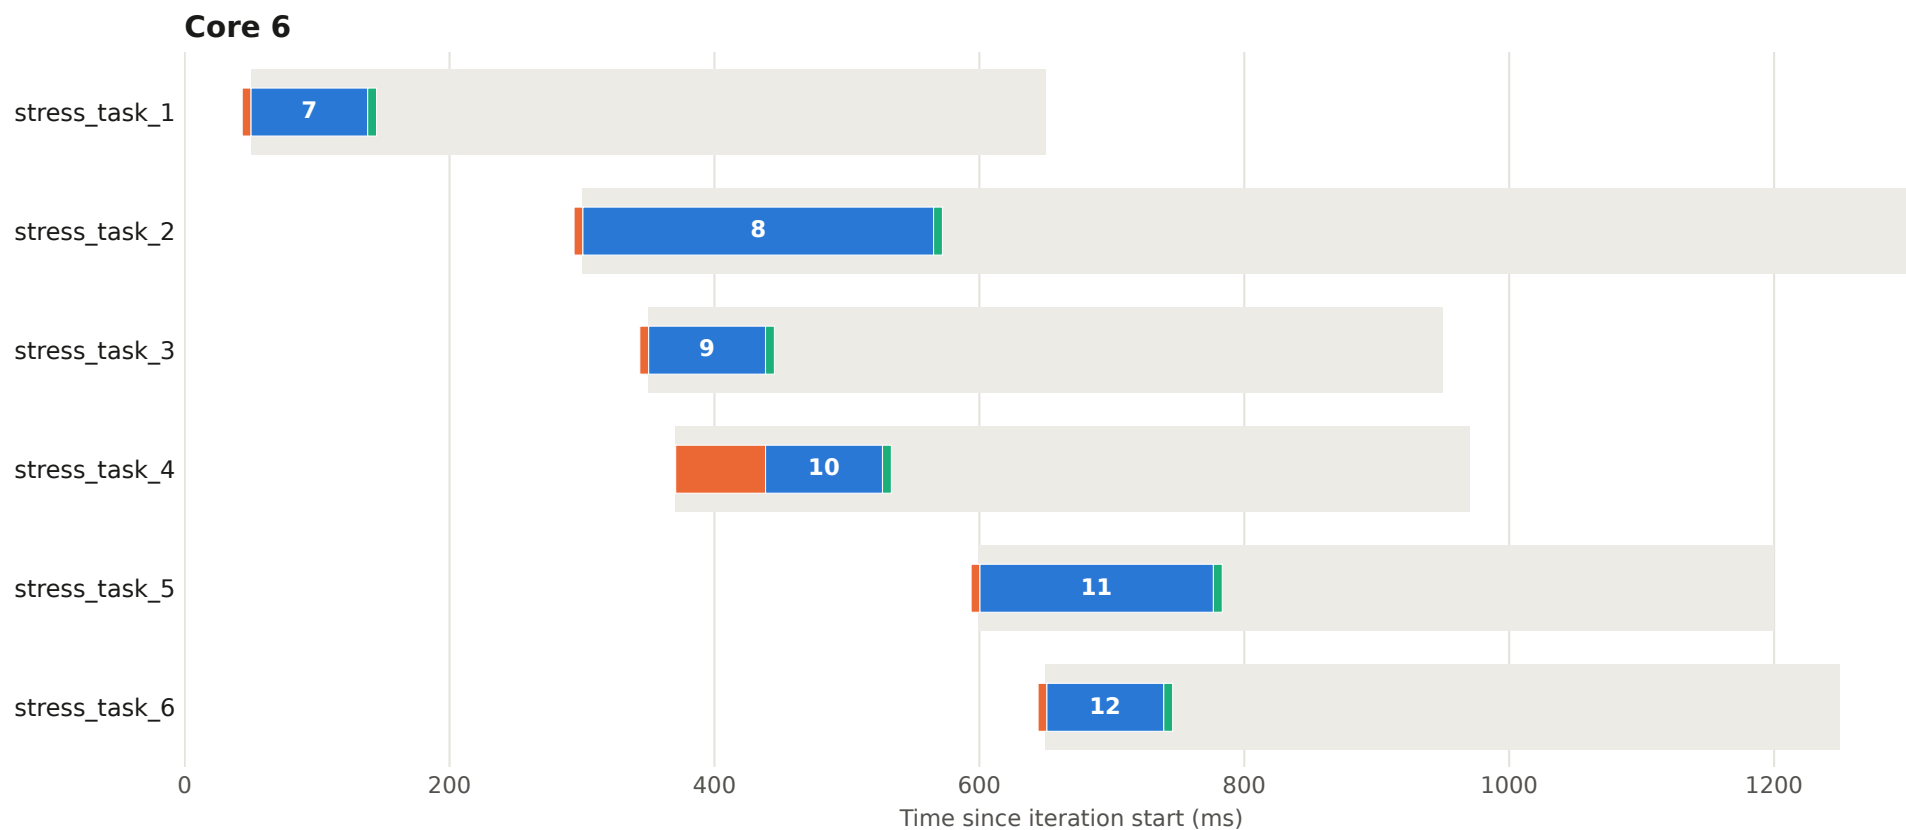


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 95 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

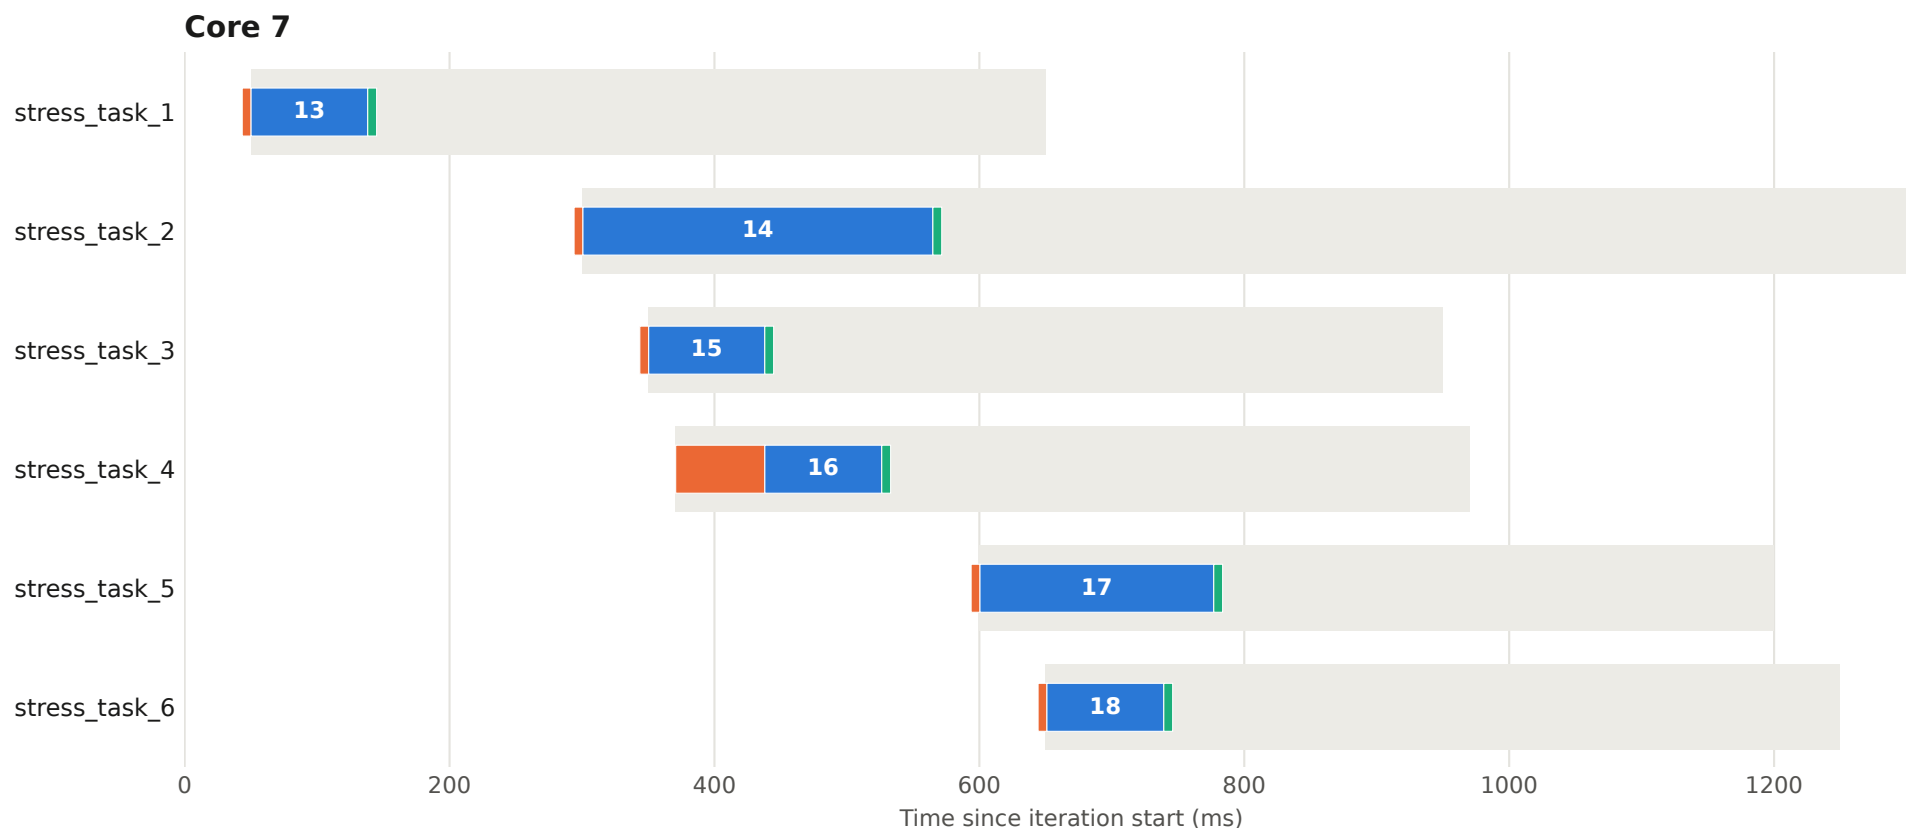


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 96 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

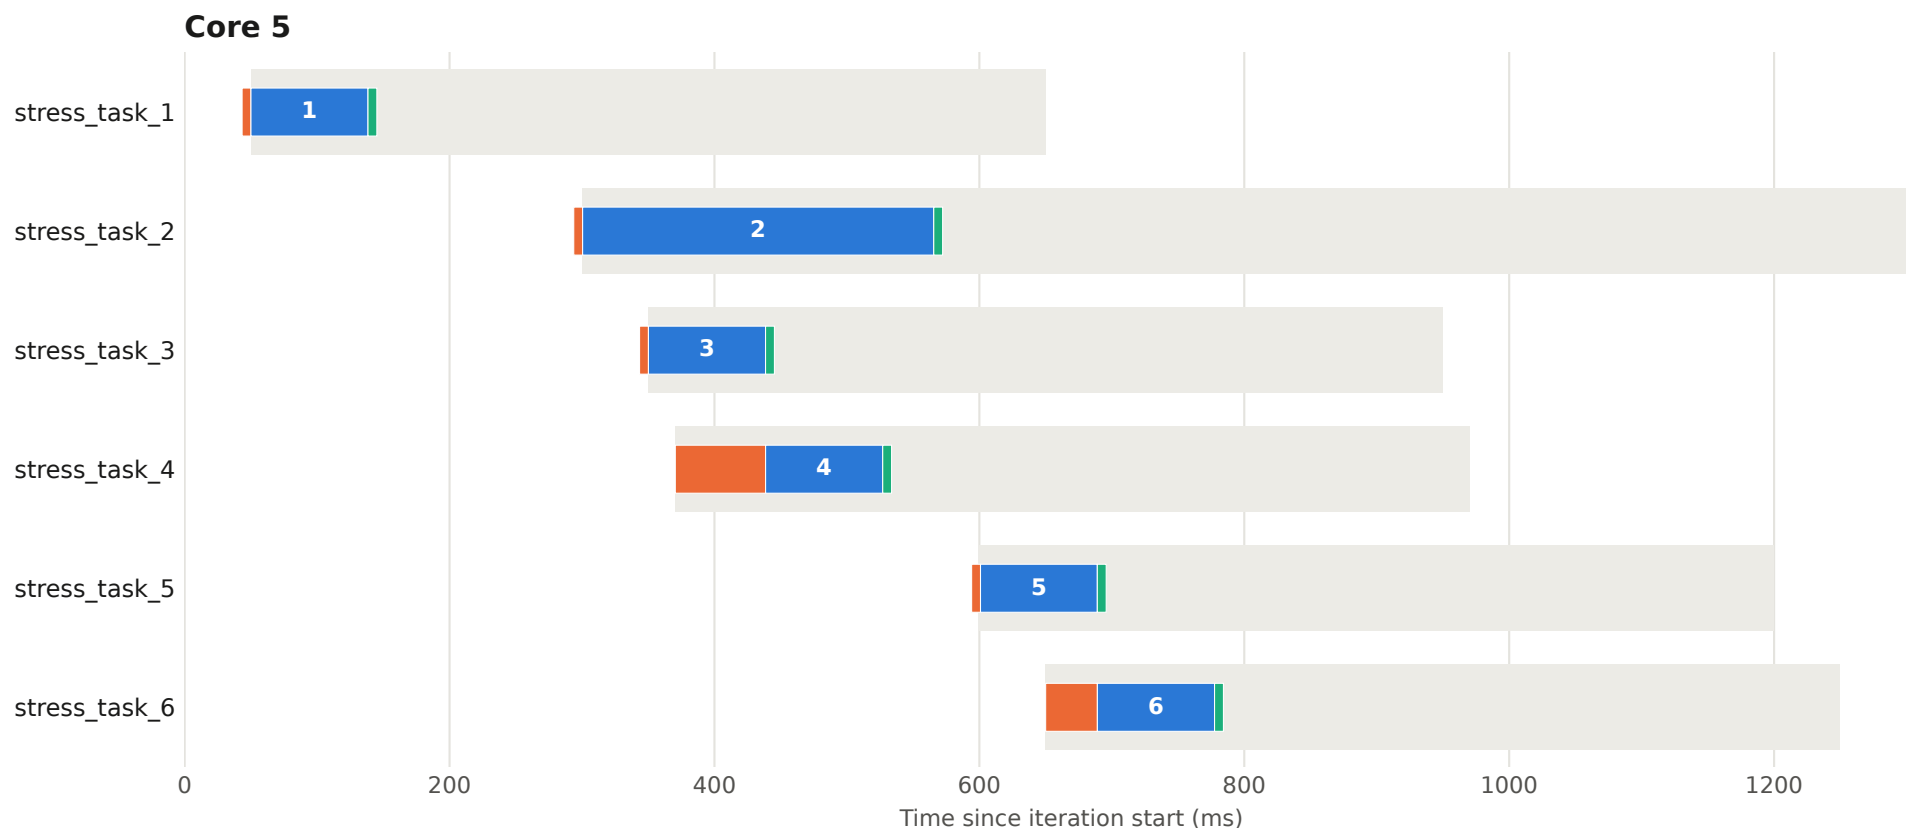


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 96 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

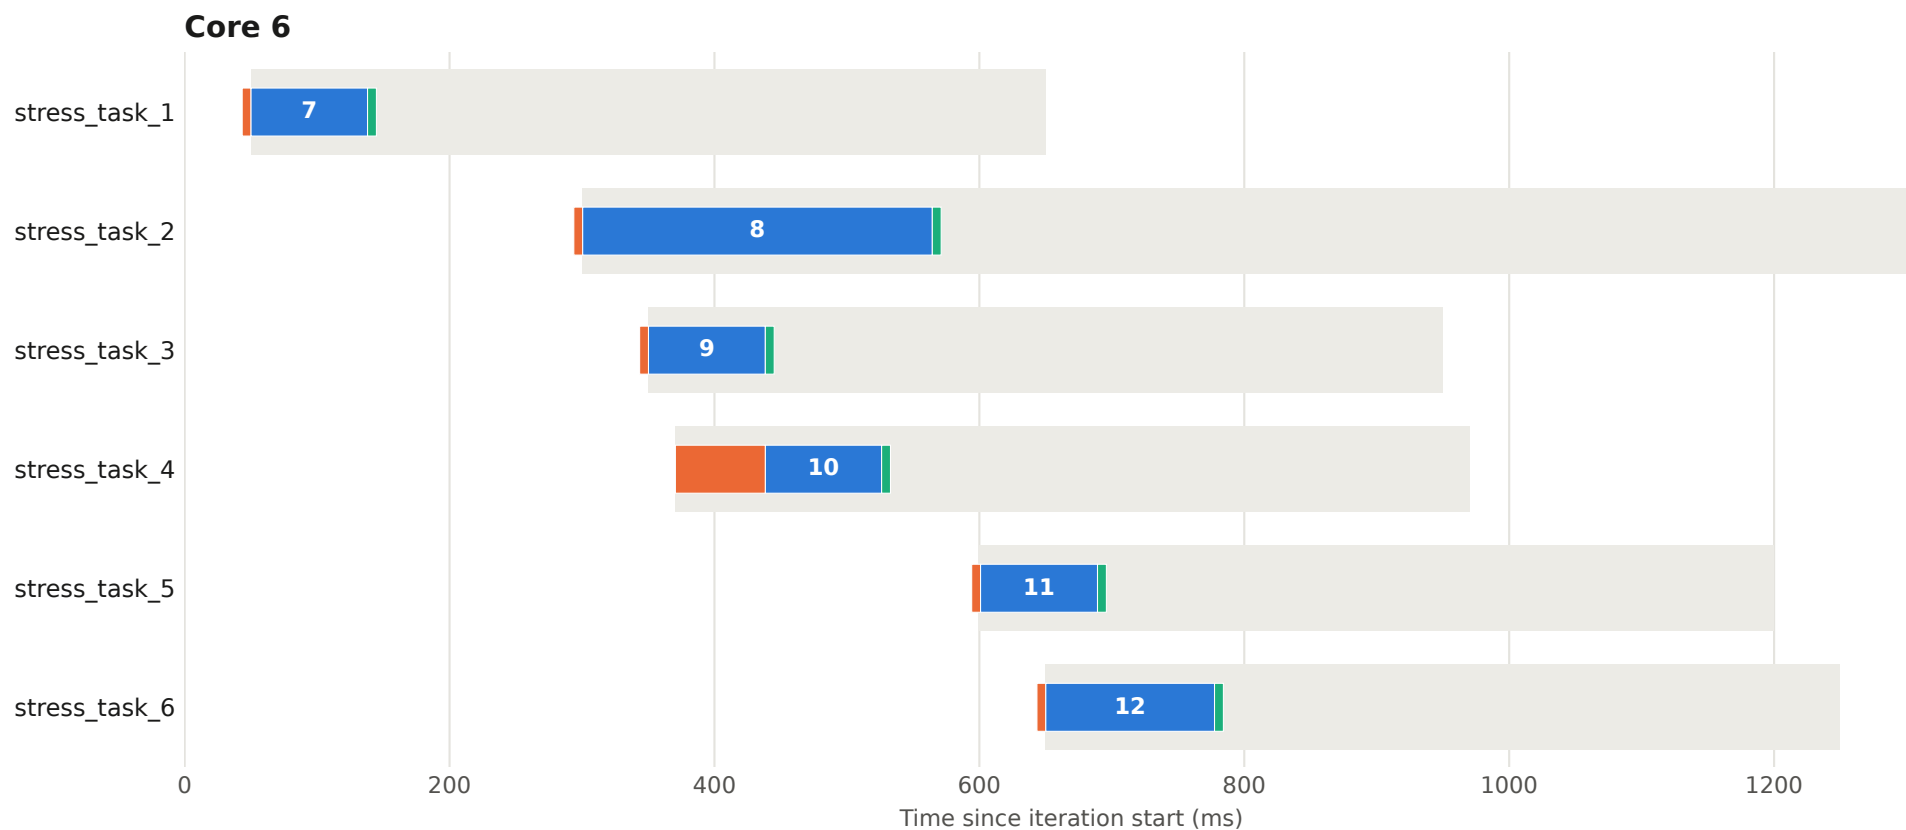


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 96 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

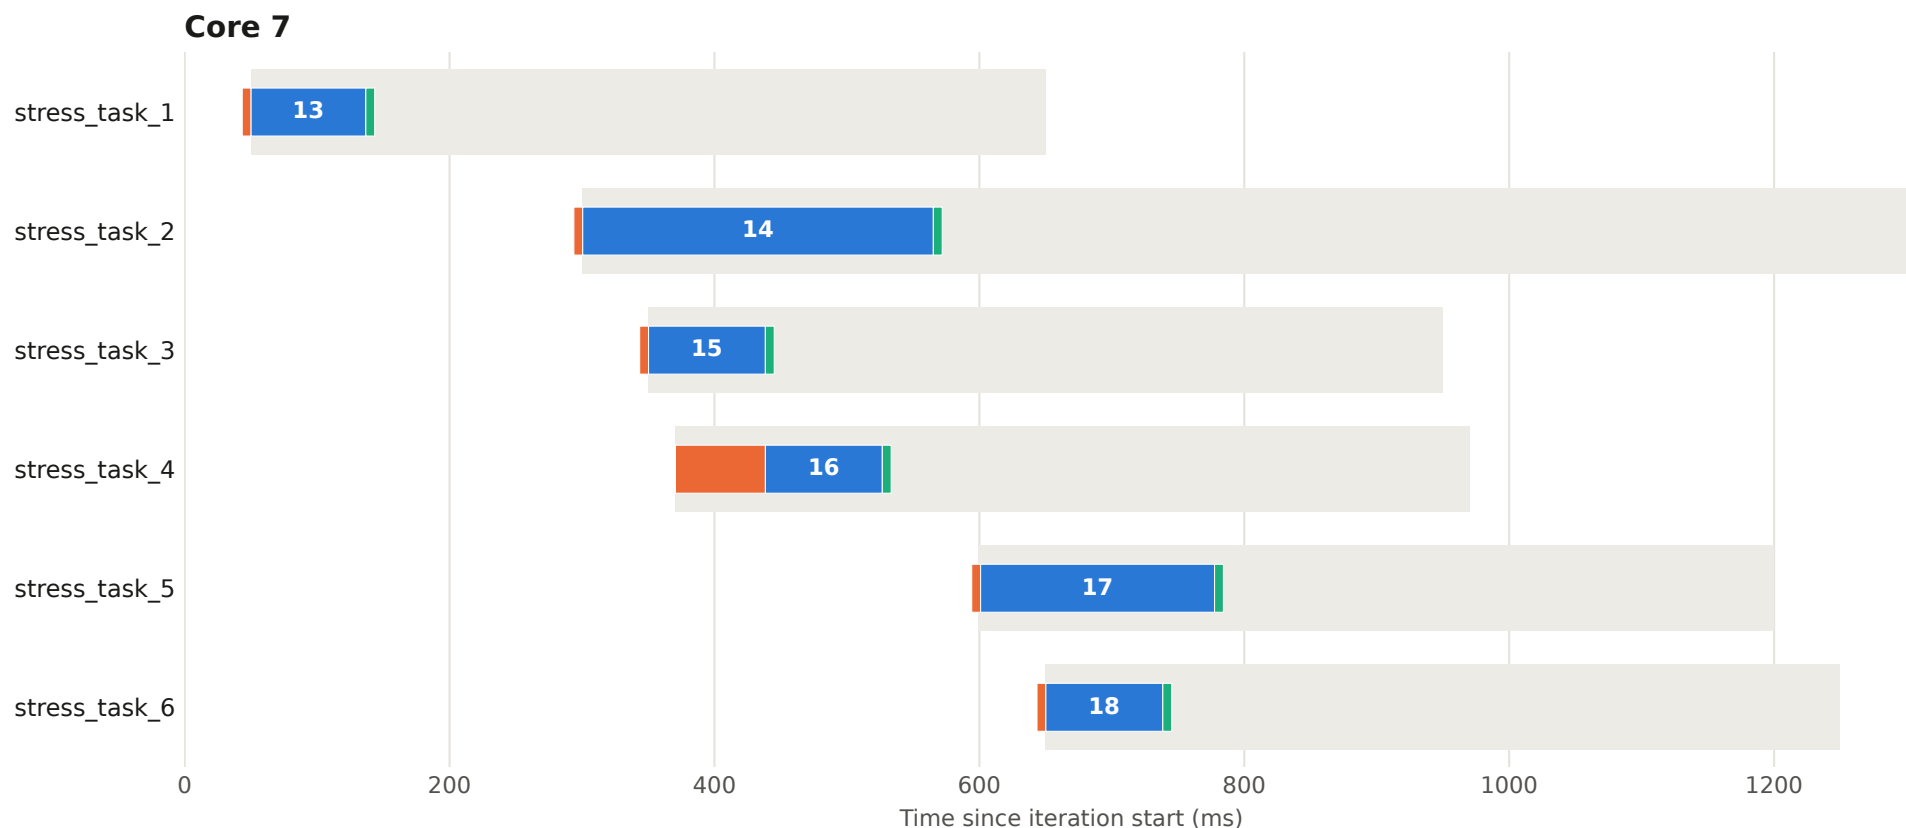


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 97 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

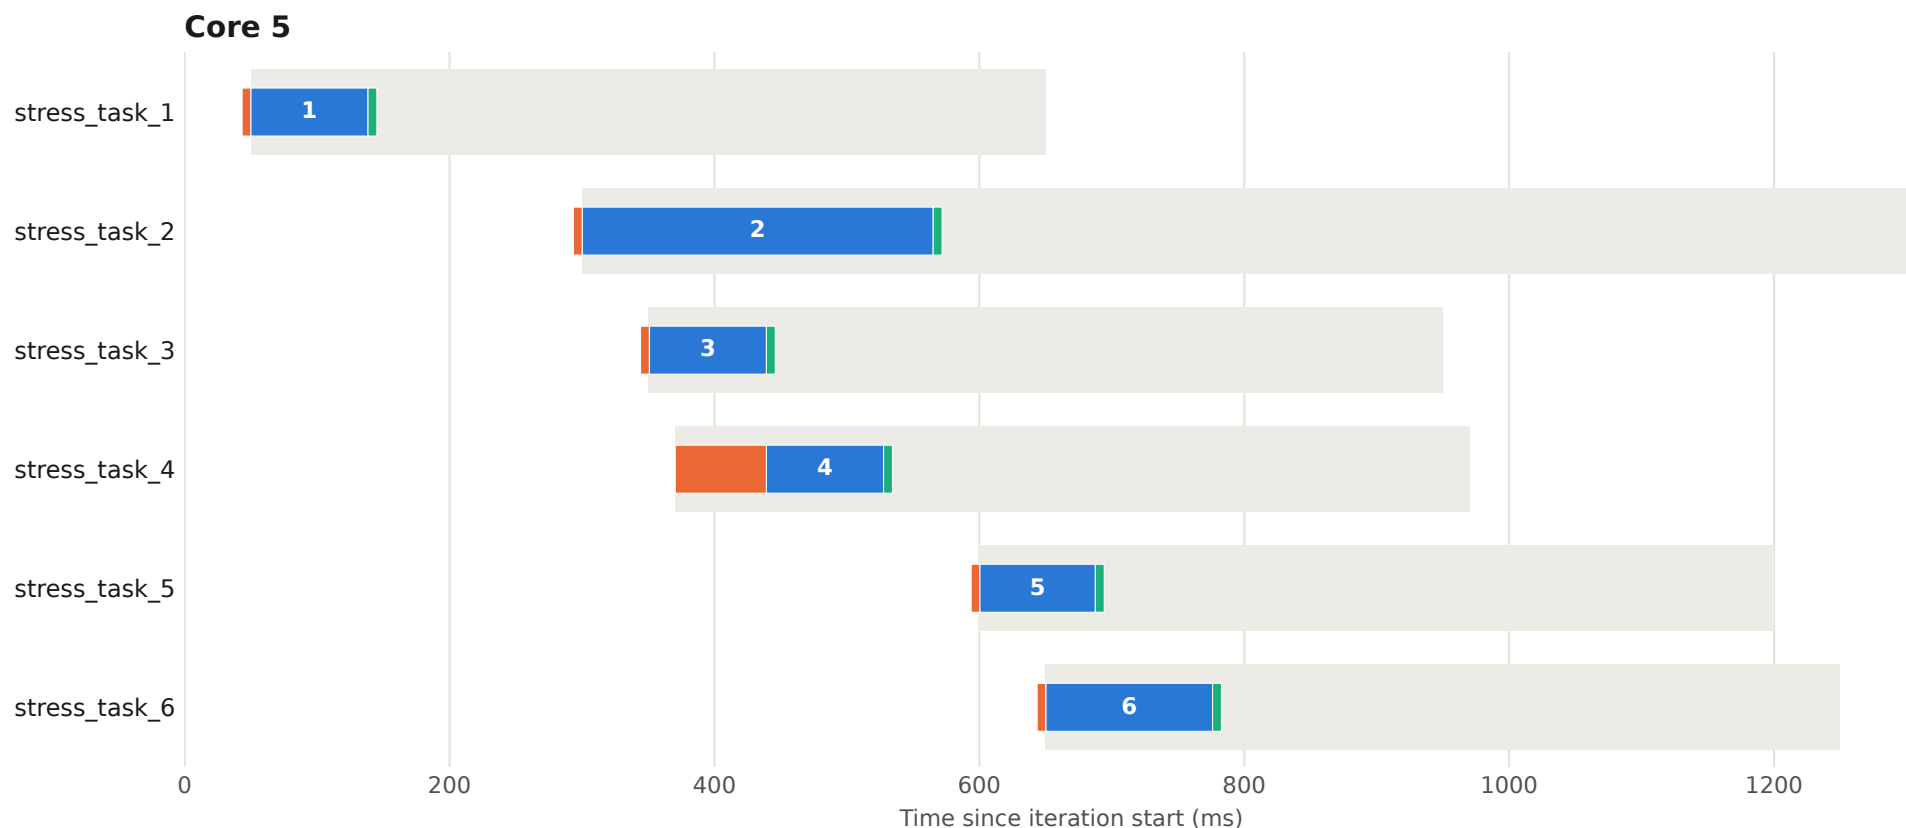


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 97 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

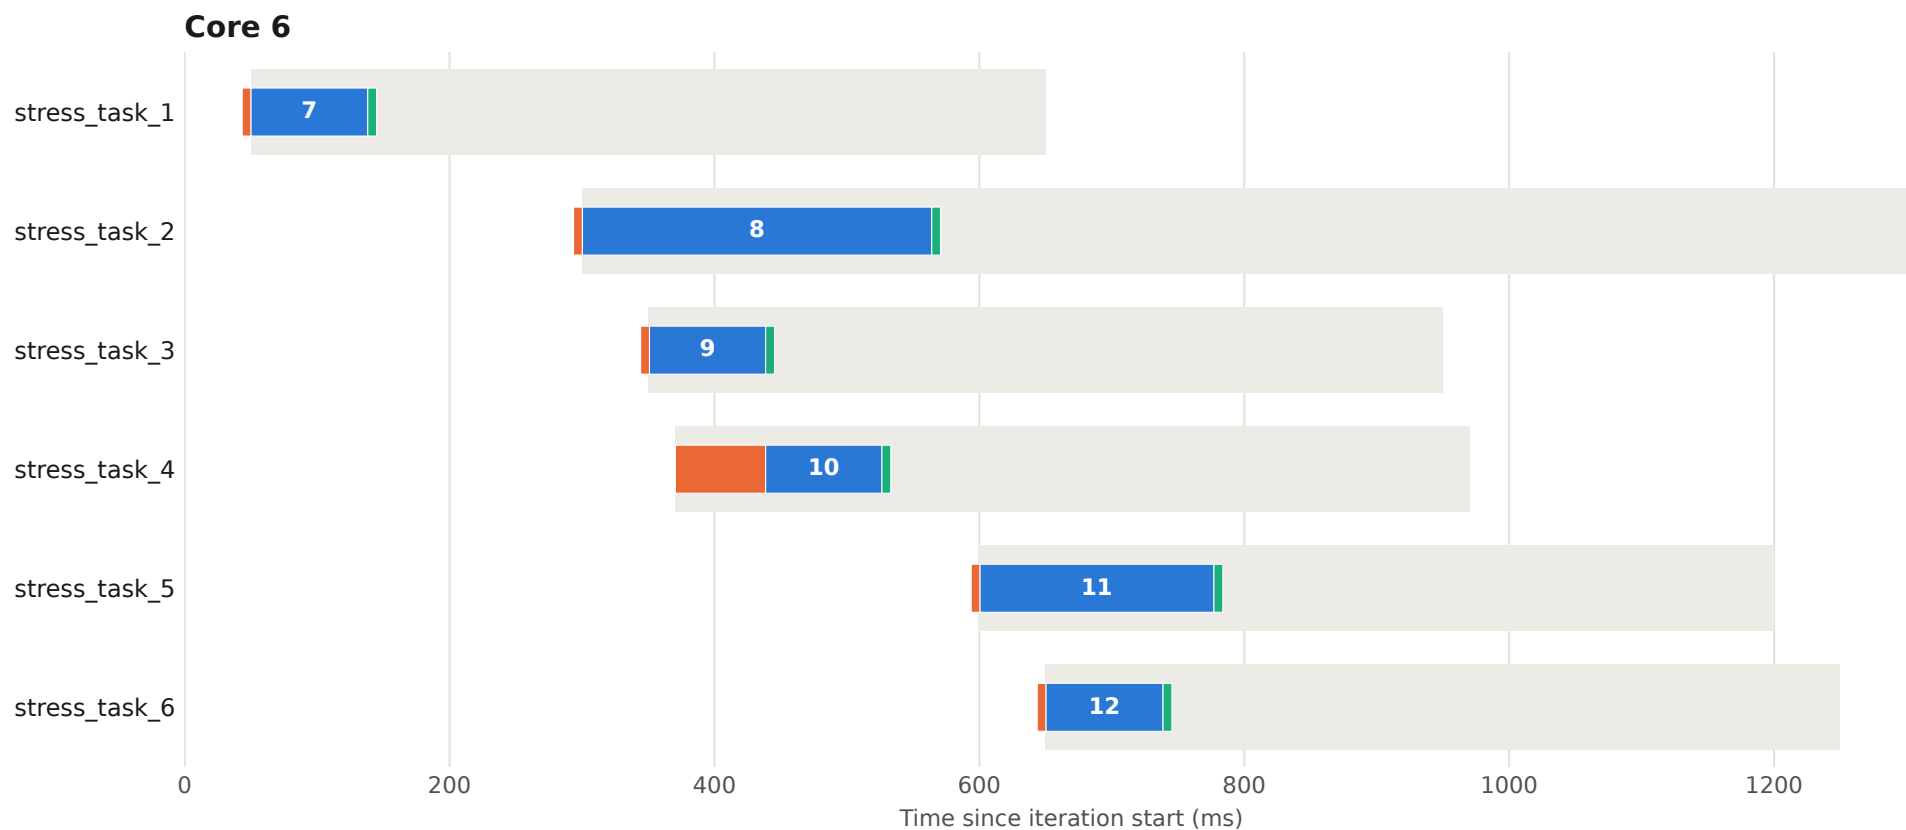


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 97 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

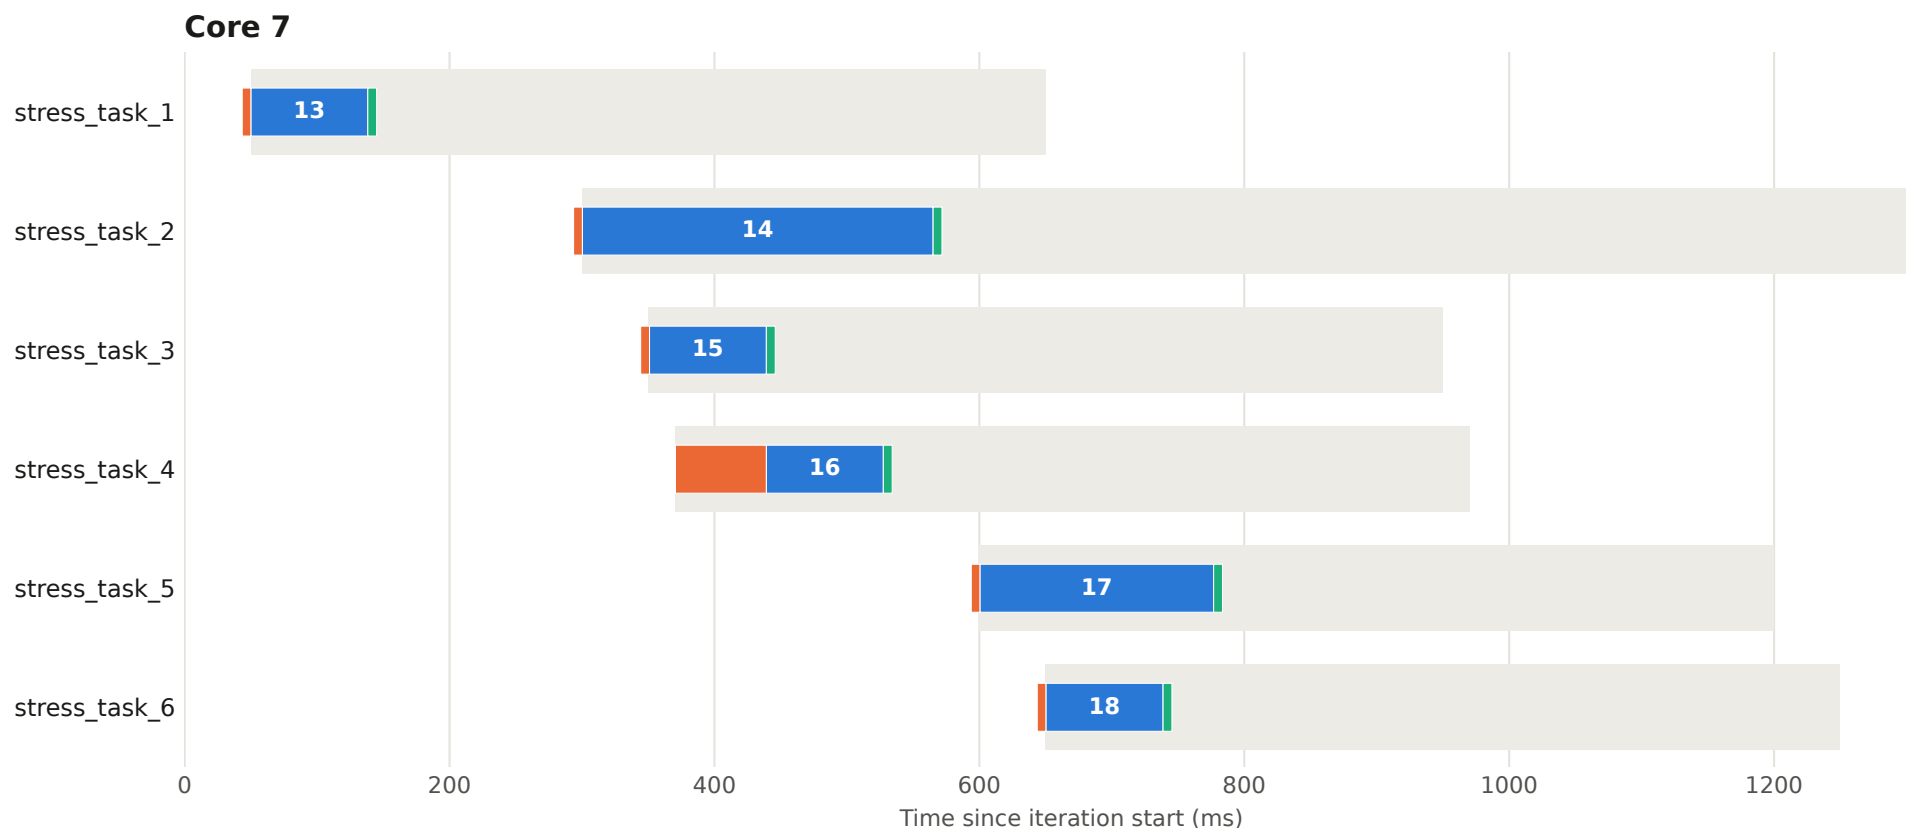


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 98 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

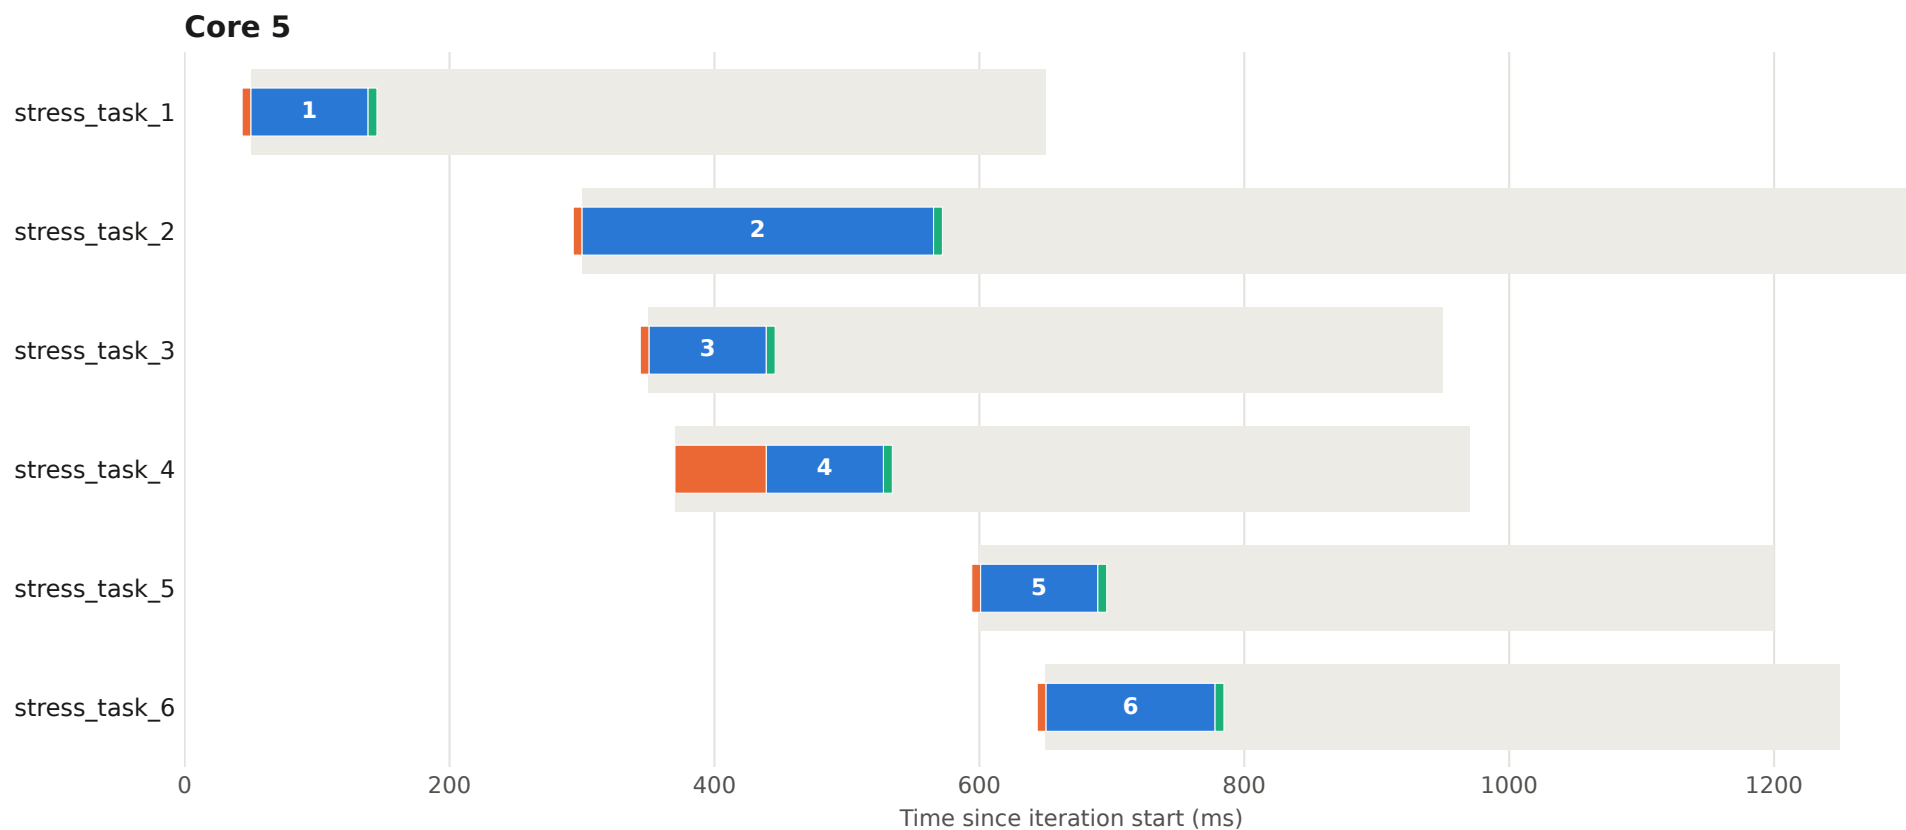


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 98 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

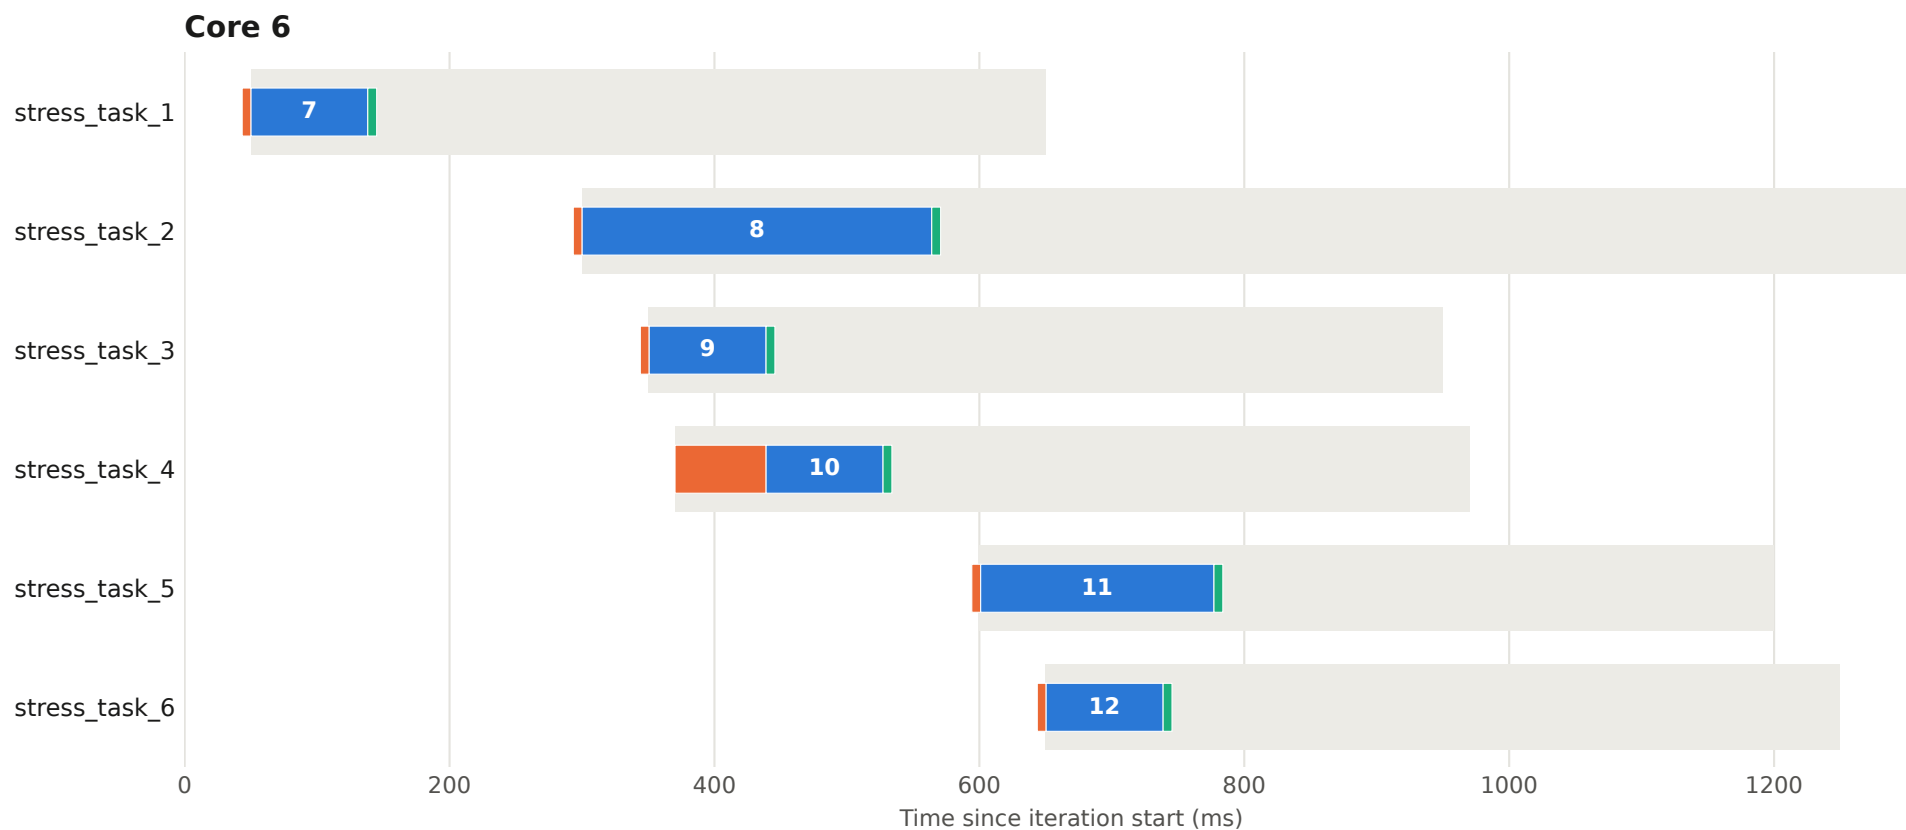


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 98 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

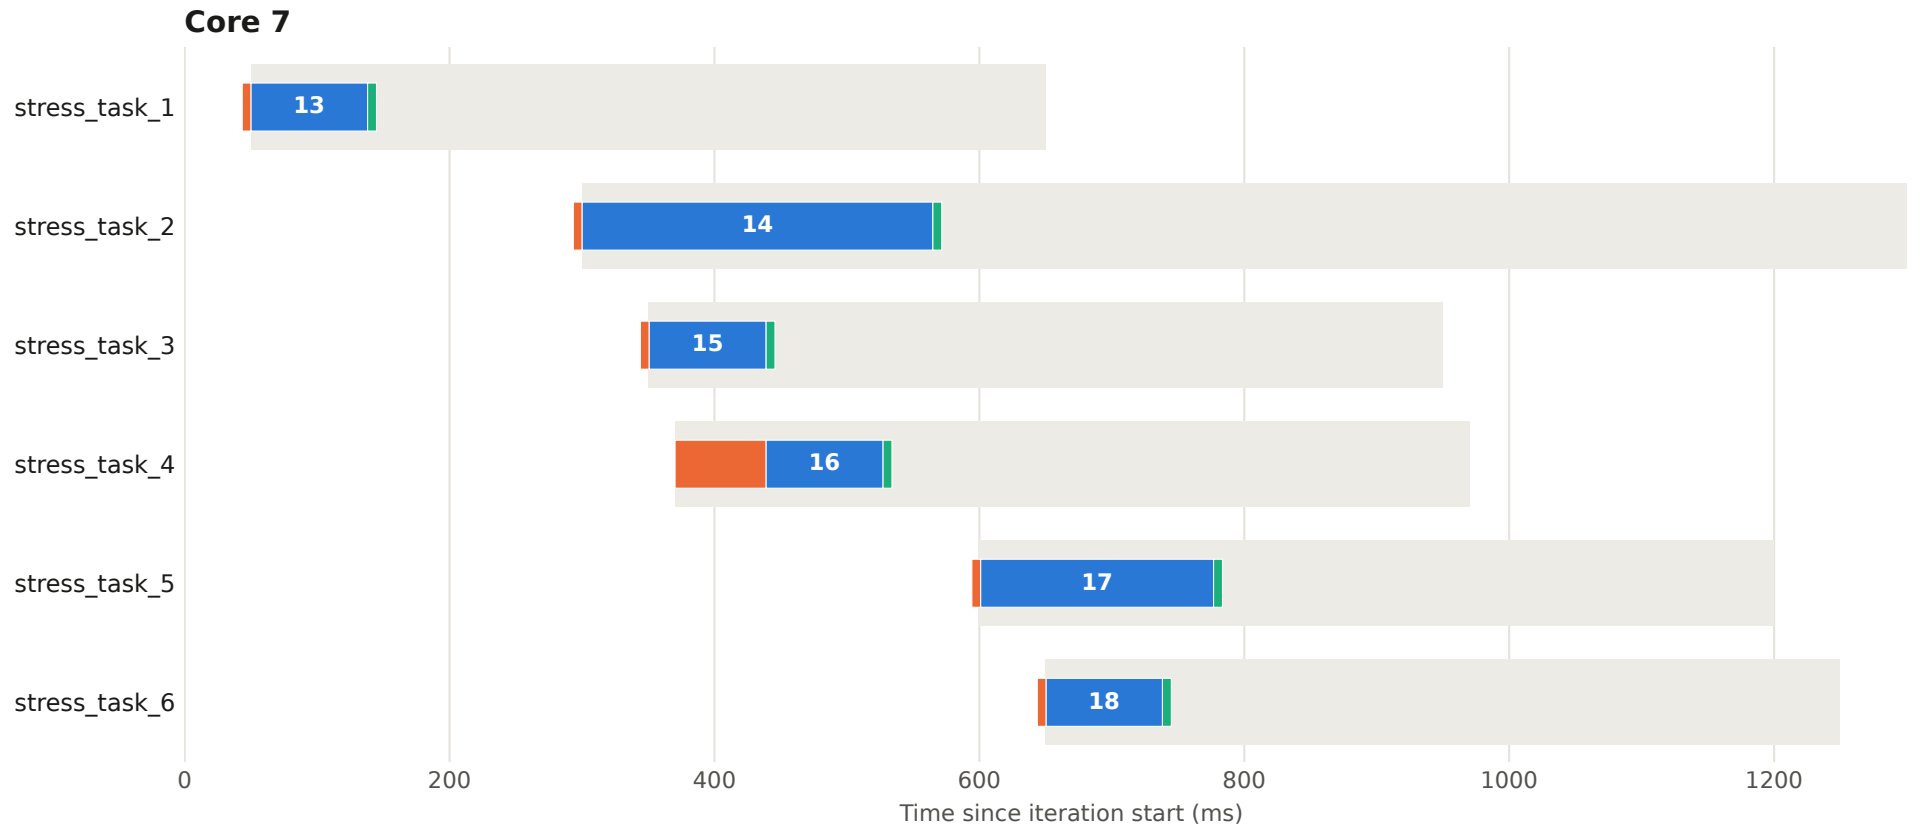


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 99 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

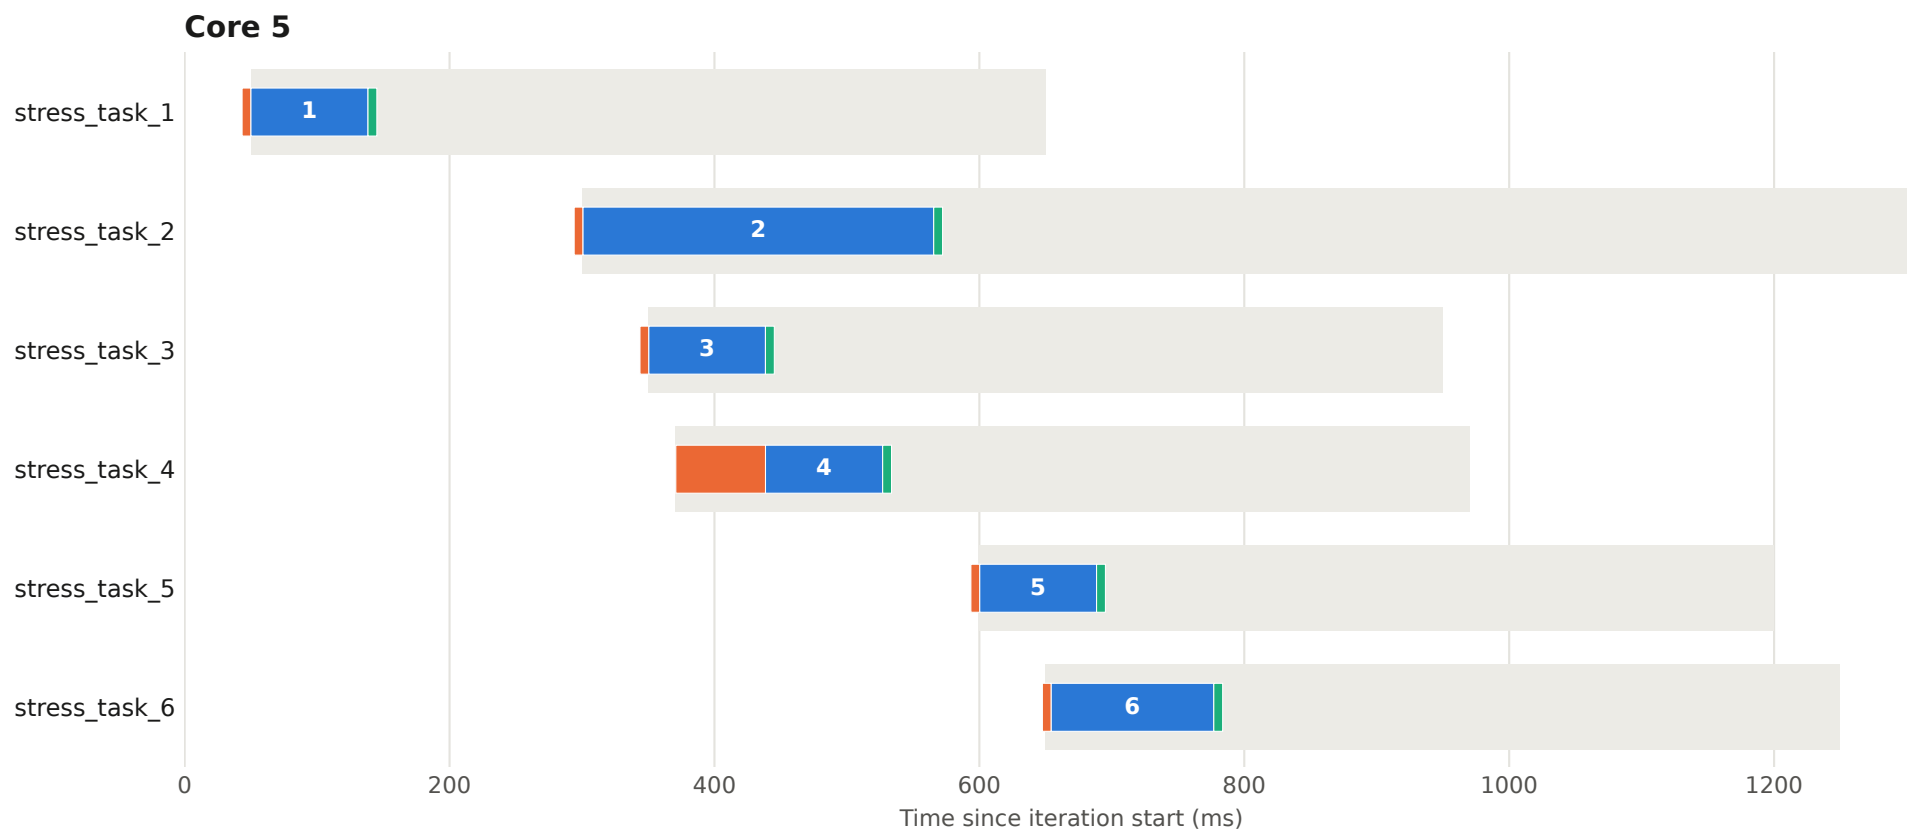


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 99 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

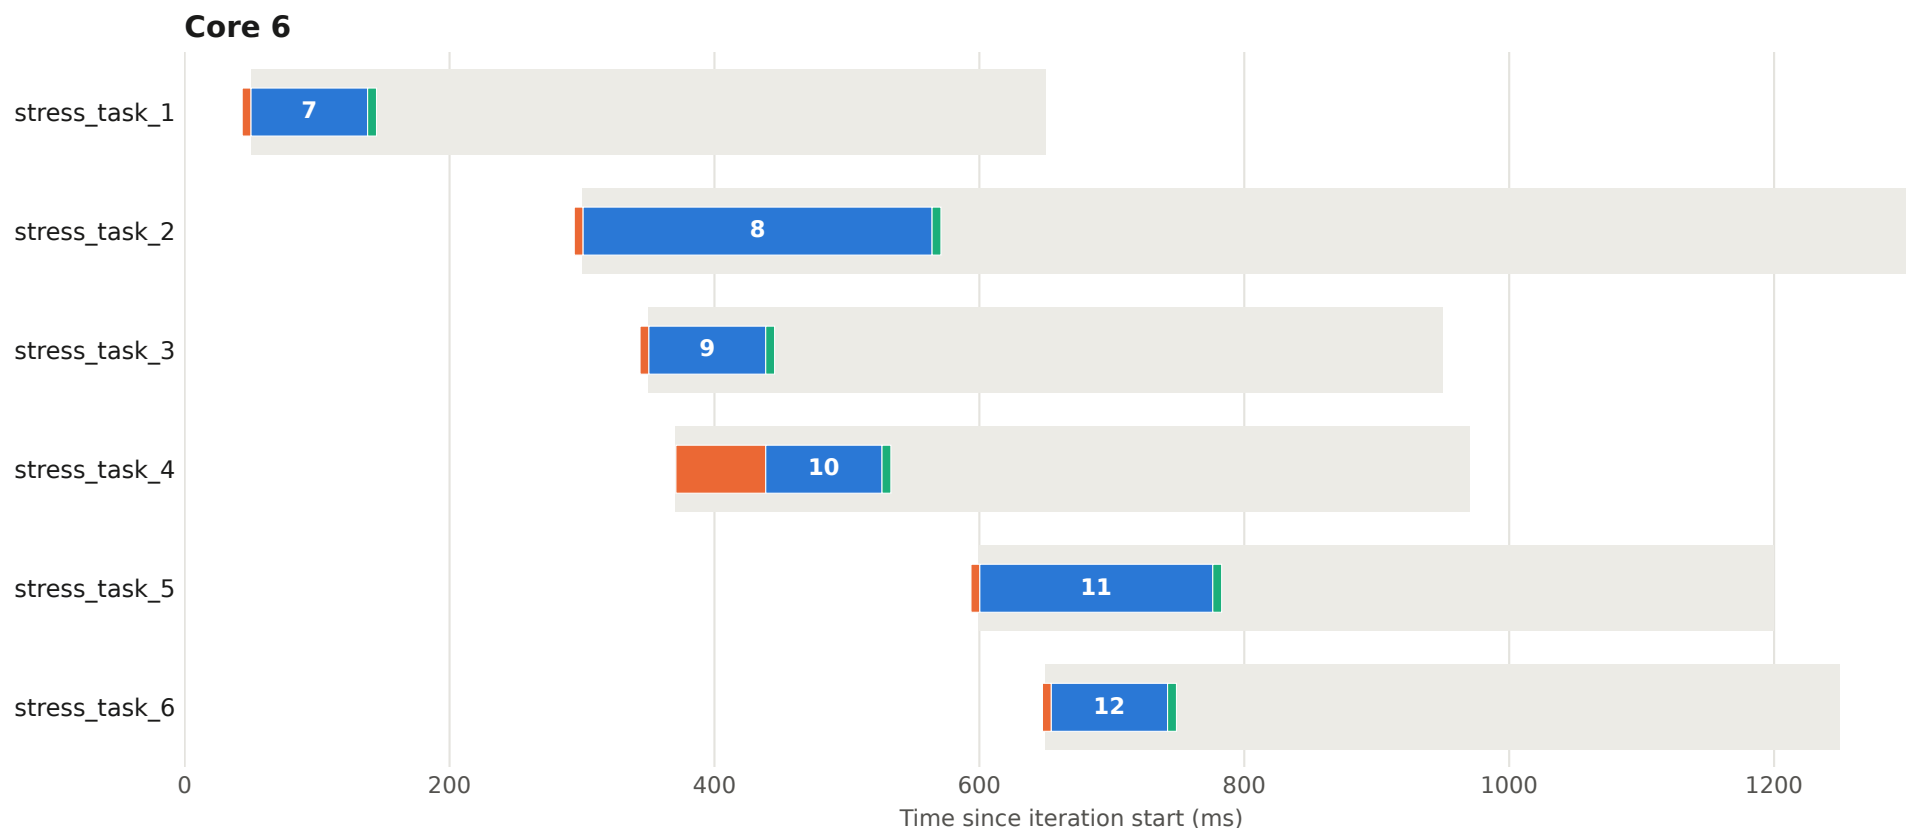


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 99 - core 7

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

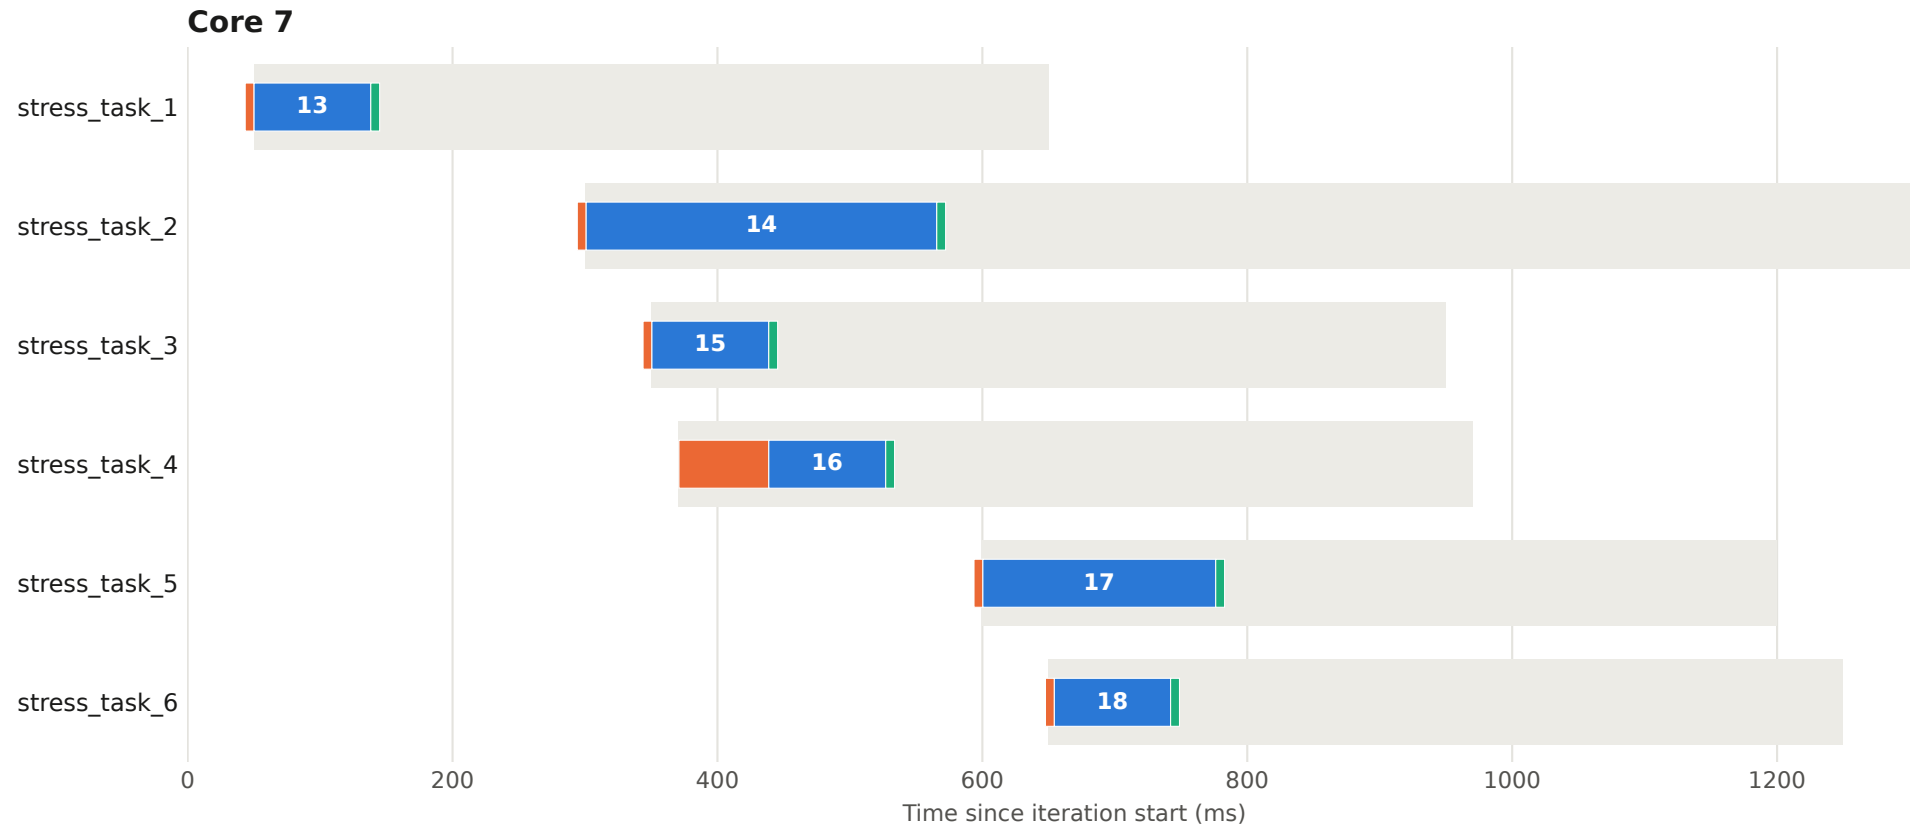

Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.