

Performance report

choreography-mqueue | test_three_core_sep_1

Generated	2026-09-24 22:32:48
Schedule	Configurable CPU/IO Benchmark
Iterations in logs	100 (#0 - #99), manifest declares 100
Tasks	1=stress_task_1, 2=stress_task_2, 3=stress_task_3, 4=stress_task_4, 5=stress_task_5, 6=stress_task_6, 7=stress_task_1, 8=stress_task_2, 9=stress_task_3, 10=stress_task_4, 11=stress_task_5, 12=stress_task_6
Cores used	5, 6, 62026
PERF records	1198 (2 malformed skipped)
Log sources	stress_task_1.log, stress_task_2.log, stress_task_3.log, stress_task_4.log, stress_task_5.log, stress_task_6.log
Manifest	tests/test_0_code/manifest.yaml

Statistics summary

All values in milliseconds | samples per task: 99-100 iteration(s) | tasks 1-6

Task ID	Image name	Metric	Mean	Std Dev	Min	Max	Median	p99
1	stress_task_1	q_em_tw_ms	0.069	0.017	0.050	0.204	0.069	0.100
		t_in_tw_ms	88.159	0.465	86.859	89.115	88.362	88.579
		q_tw_em_ms	0.005	0.002	0.004	0.016	0.004	0.015
		total_ms	88.233	0.467	86.939	89.324	88.432	88.673
2	stress_task_2	q_em_tw_ms	0.067	0.015	0.048	0.193	0.065	0.098
		t_in_tw_ms	264.978	0.448	263.606	266.349	264.994	265.776
		q_tw_em_ms	0.005	0.003	0.004	0.018	0.004	0.017
		total_ms	265.051	0.453	263.674	266.559	265.072	265.850
3	stress_task_3	q_em_tw_ms	0.058	0.016	0.045	0.192	0.054	0.090
		t_in_tw_ms	88.344	0.191	87.988	88.790	88.394	88.663
		q_tw_em_ms	0.006	0.005	0.004	0.041	0.004	0.022
		total_ms	88.408	0.195	88.042	88.988	88.455	88.755
4	stress_task_4	q_em_tw_ms	68.406	0.446	67.331	69.102	68.377	69.097
		t_in_tw_ms	88.301	0.282	86.910	88.743	88.421	88.655
		q_tw_em_ms	0.004	0.000	0.003	0.004	0.004	0.004
		total_ms	156.710	0.519	155.535	157.844	156.717	157.590
5	stress_task_5	q_em_tw_ms	0.072	0.016	0.051	0.213	0.070	0.100
		t_in_tw_ms	91.899	17.432	87.438	177.155	88.444	177.055
		q_tw_em_ms	0.005	0.002	0.004	0.018	0.005	0.016
		total_ms	91.976	17.430	87.520	177.213	88.514	177.130
6	stress_task_6	q_em_tw_ms	10.051	16.942	0.048	39.491	0.061	39.370
		t_in_tw_ms	115.226	17.685	87.407	128.240	126.505	127.999
		q_tw_em_ms	0.004	0.001	0.003	0.011	0.004	0.008
		total_ms	125.282	7.585	88.002	128.431	126.776	128.134

Statistics summary


All values in milliseconds | samples per task: 99-100 iteration(s) | tasks 7-12

Task ID	Image name	Metric	Mean	Std Dev	Min	Max	Median	p99
7	stress_task_1	q_em_tw_ms	0.035	0.013	0.023	0.149	0.030	0.051
		t_in_tw_ms	87.659	0.536	86.425	88.612	87.904	88.170
		q_tw_em_ms	0.007	0.004	0.004	0.020	0.006	0.018
		total_ms	87.701	0.538	86.472	88.779	87.948	88.208
8	stress_task_2	q_em_tw_ms	0.031	0.012	0.022	0.150	0.029	0.042
		t_in_tw_ms	263.763	0.505	261.398	264.391	263.875	264.385
		q_tw_em_ms	0.005	0.001	0.004	0.015	0.005	0.008
		total_ms	263.800	0.506	261.432	264.428	263.910	264.421
9	stress_task_3	q_em_tw_ms	0.031	0.012	0.027	0.145	0.029	0.040
		t_in_tw_ms	87.888	0.250	86.561	88.202	87.981	88.128
		q_tw_em_ms	0.008	0.006	0.004	0.033	0.006	0.033
		total_ms	87.926	0.252	86.600	88.353	88.020	88.168
10	stress_task_4	q_em_tw_ms	67.941	0.457	66.631	68.748	67.925	68.683
		t_in_tw_ms	87.953	0.251	86.509	88.402	88.034	88.235
		q_tw_em_ms	0.005	0.001	0.004	0.015	0.004	0.013
		total_ms	155.899	0.534	154.483	156.926	155.900	156.884
11	stress_task_5	q_em_tw_ms	0.031	0.011	0.027	0.139	0.029	0.043
		t_in_tw_ms	160.020	33.961	87.278	176.328	175.851	176.305
		q_tw_em_ms	0.005	0.001	0.004	0.017	0.004	0.007
		total_ms	160.056	33.958	87.315	176.359	175.883	176.339
12	stress_task_6	q_em_tw_ms	0.031	0.012	0.026	0.141	0.029	0.041
		t_in_tw_ms	94.768	14.699	86.838	127.019	88.061	126.793
		q_tw_em_ms	0.005	0.003	0.004	0.017	0.005	0.017
		total_ms	94.804	14.701	86.877	127.166	88.095	126.827

Execution plan - iteration 0 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

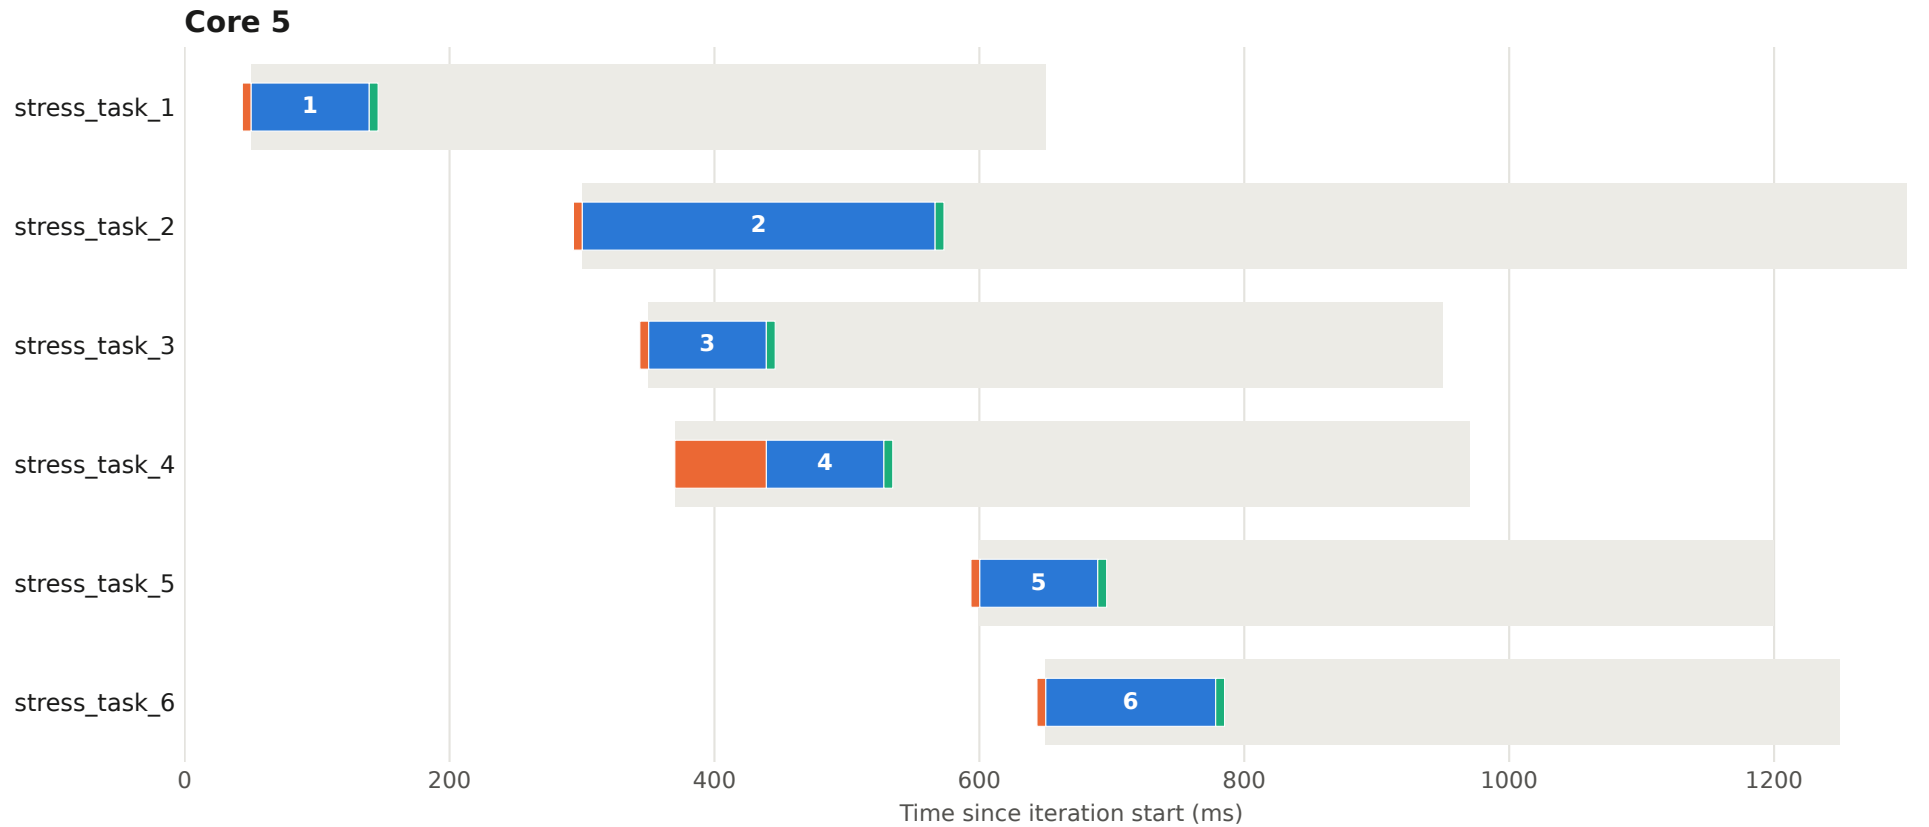


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 0 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

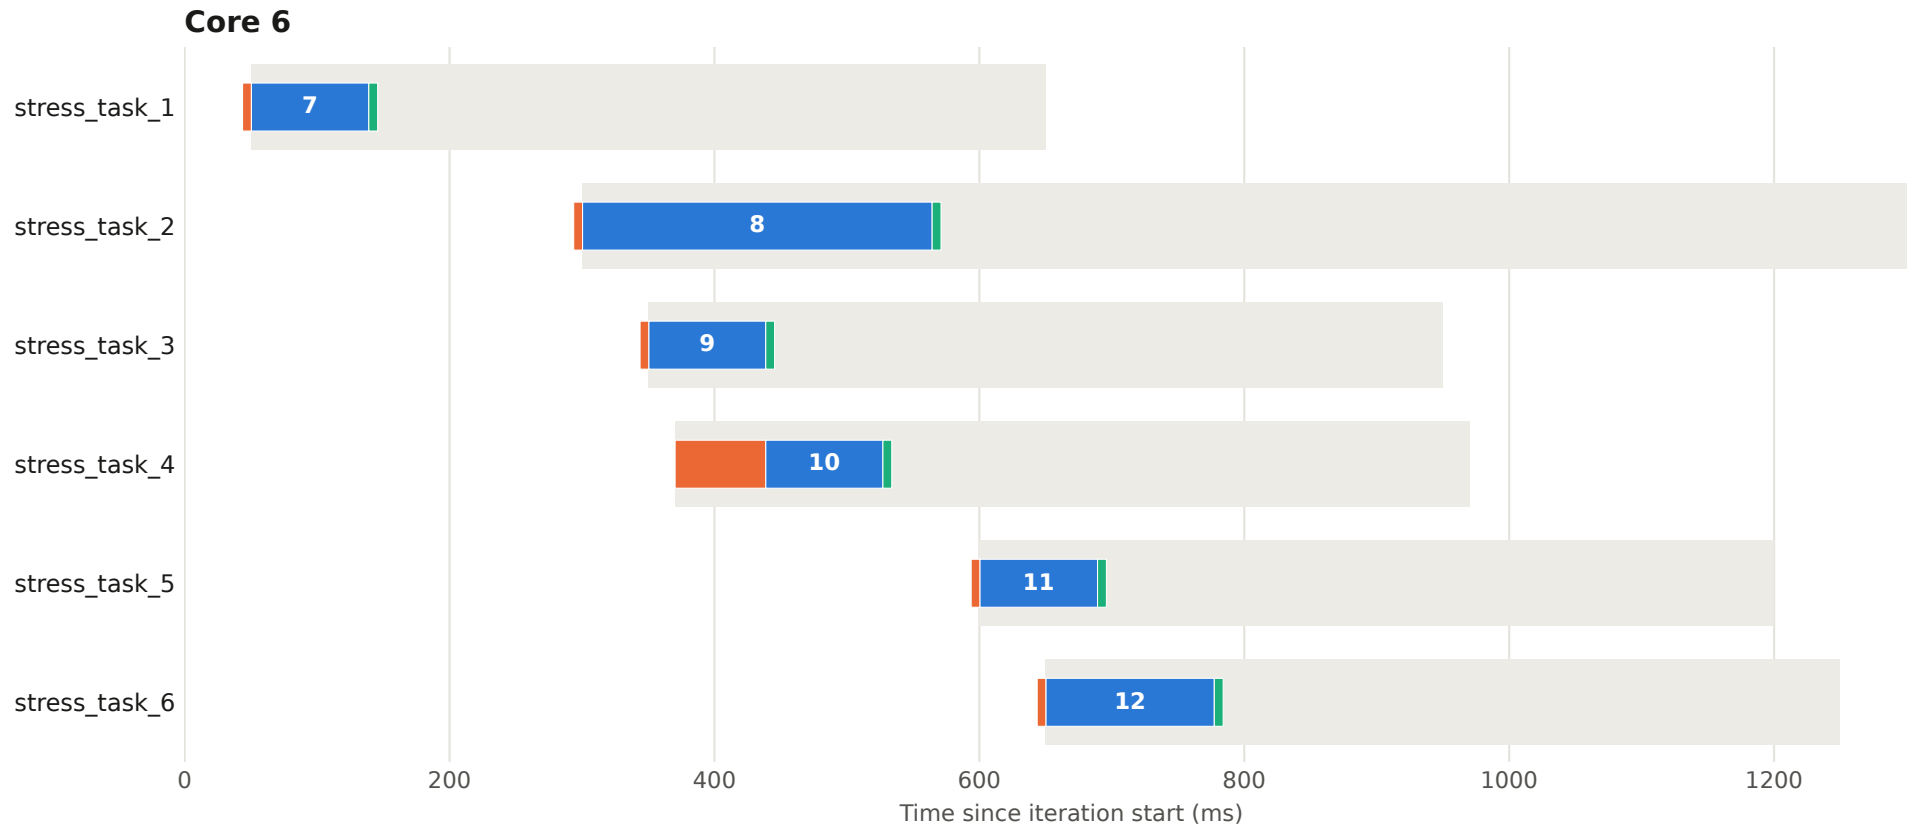


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 1 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

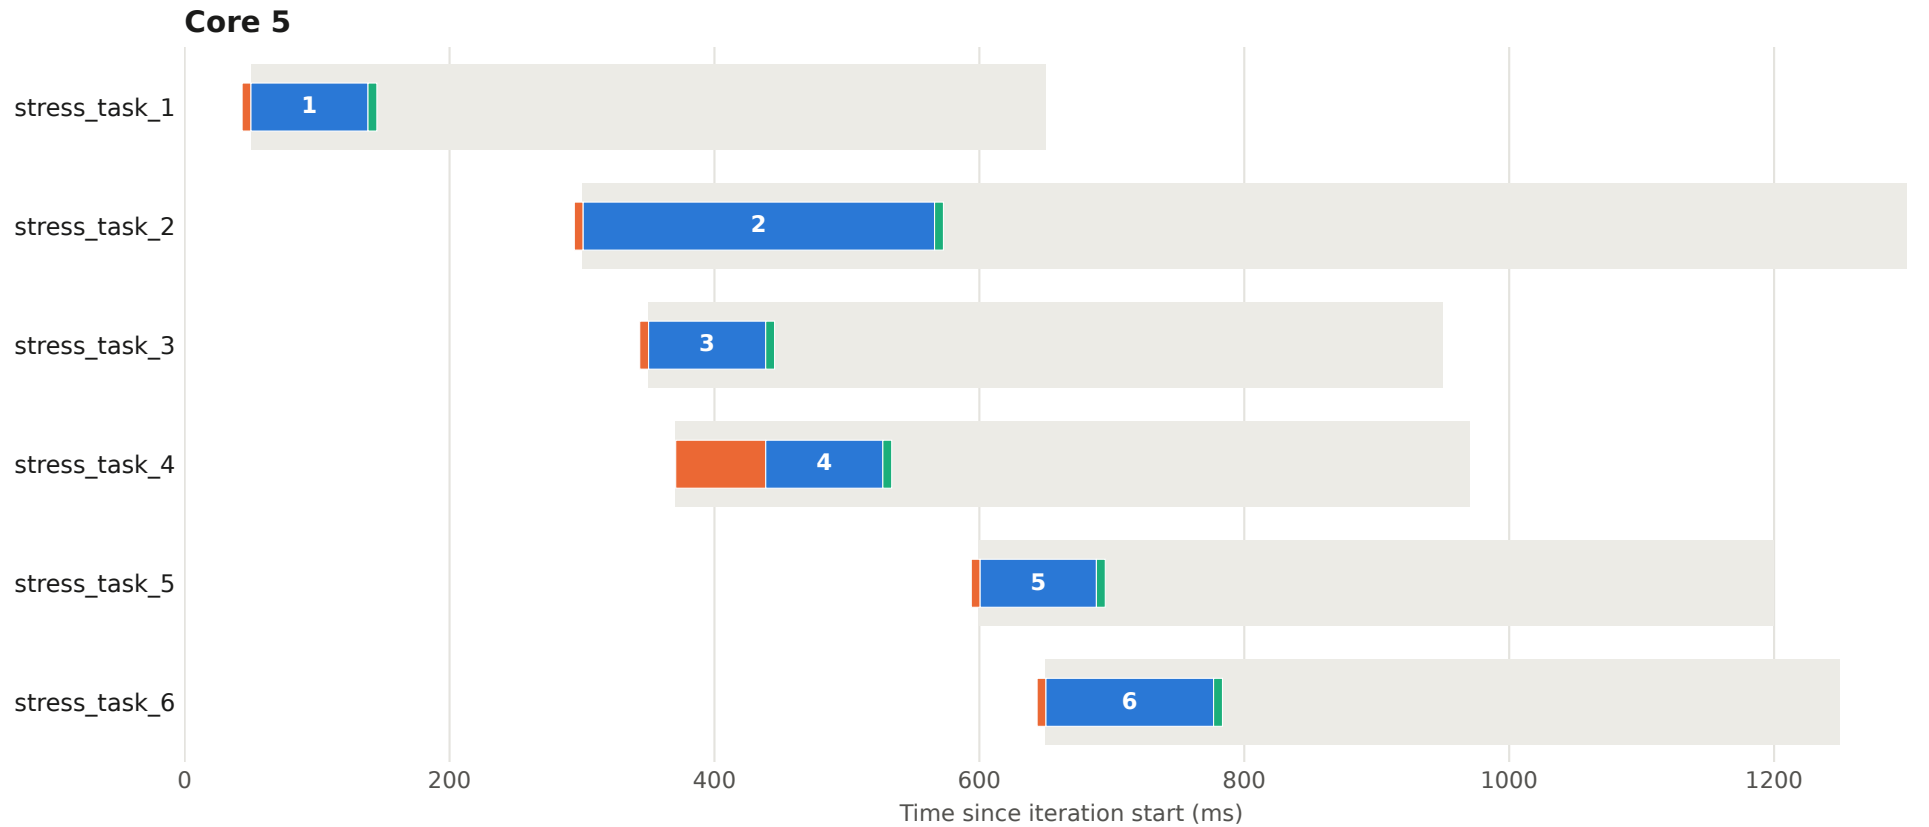


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 1 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

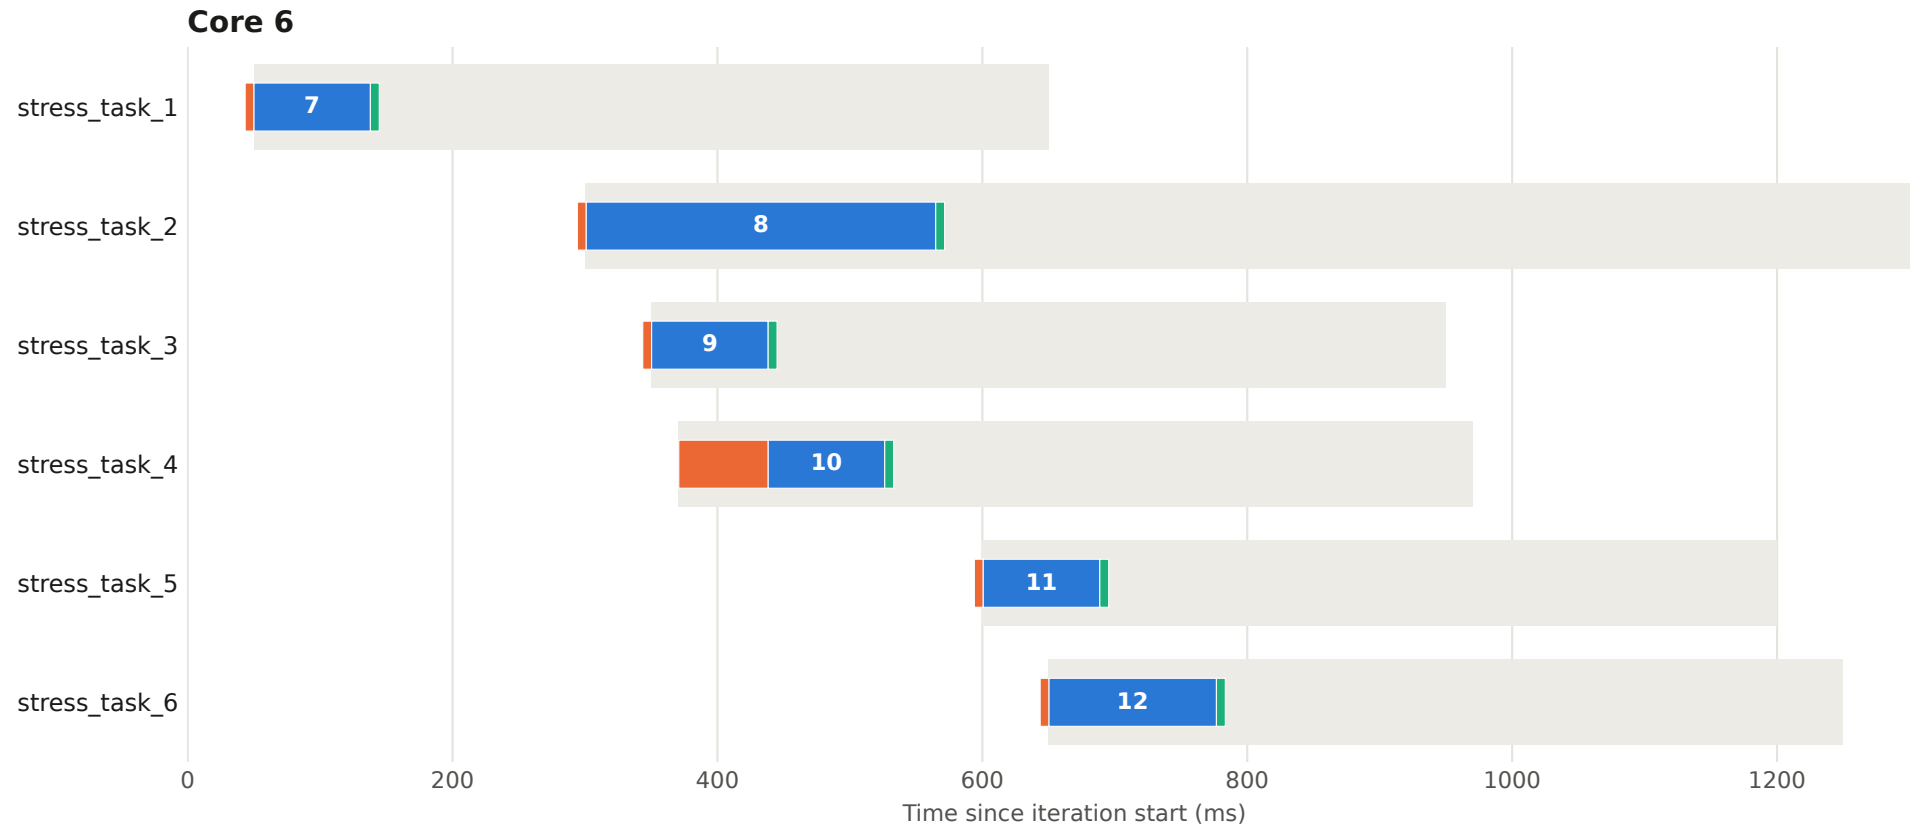


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 2 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

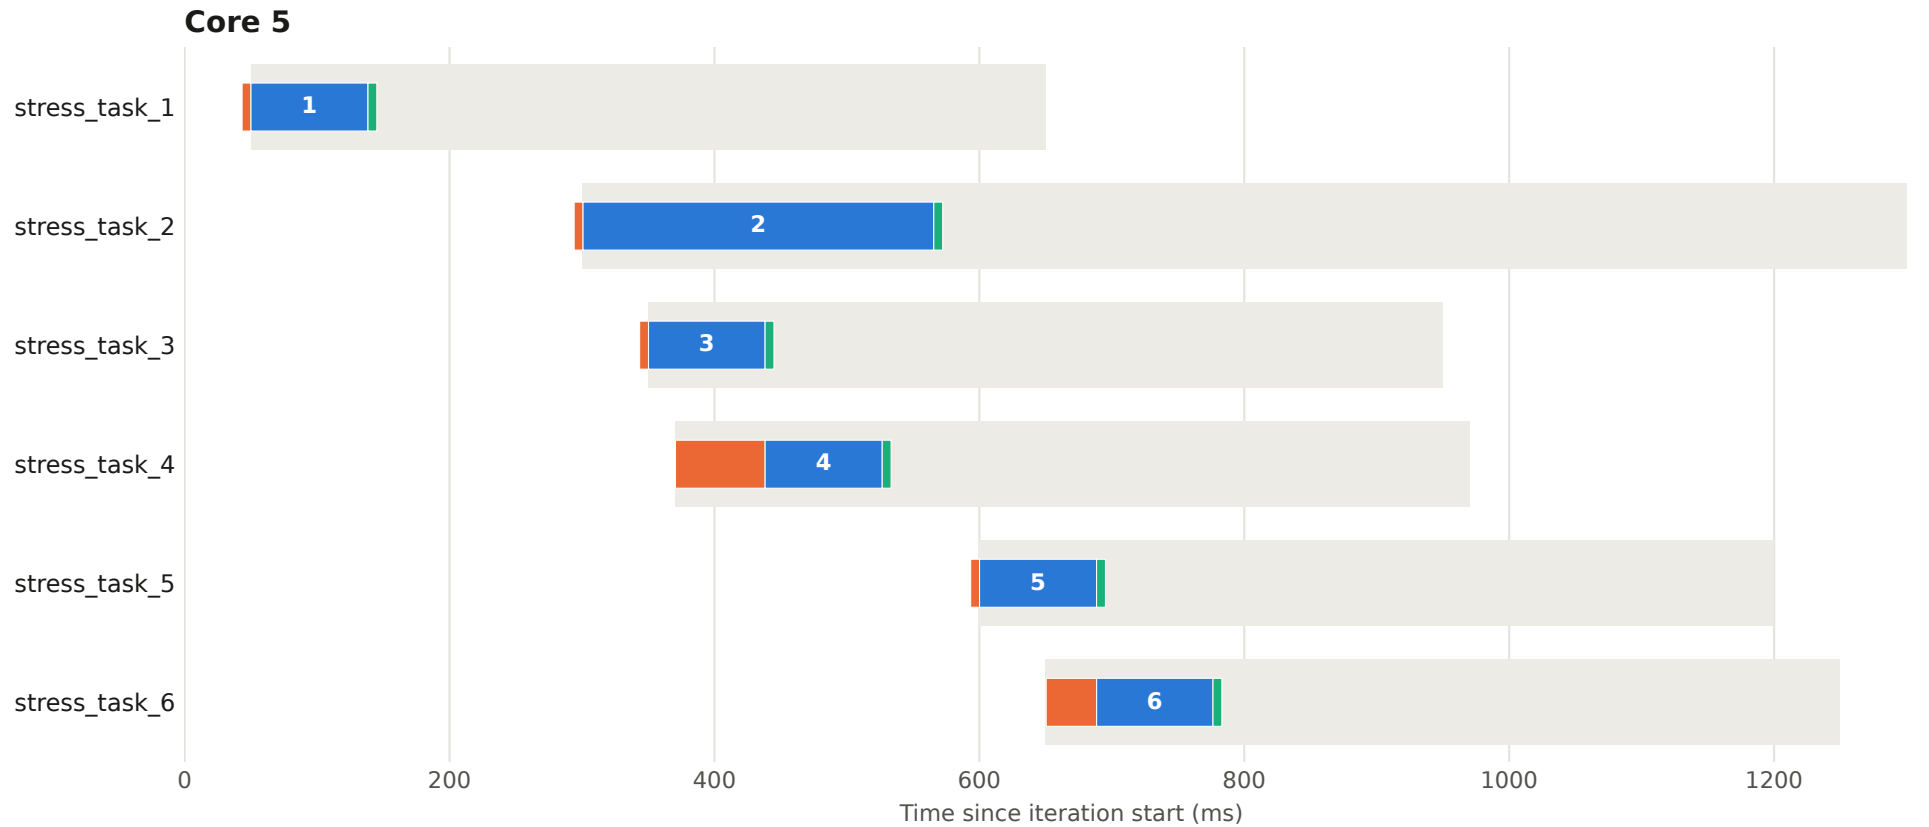


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 2 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

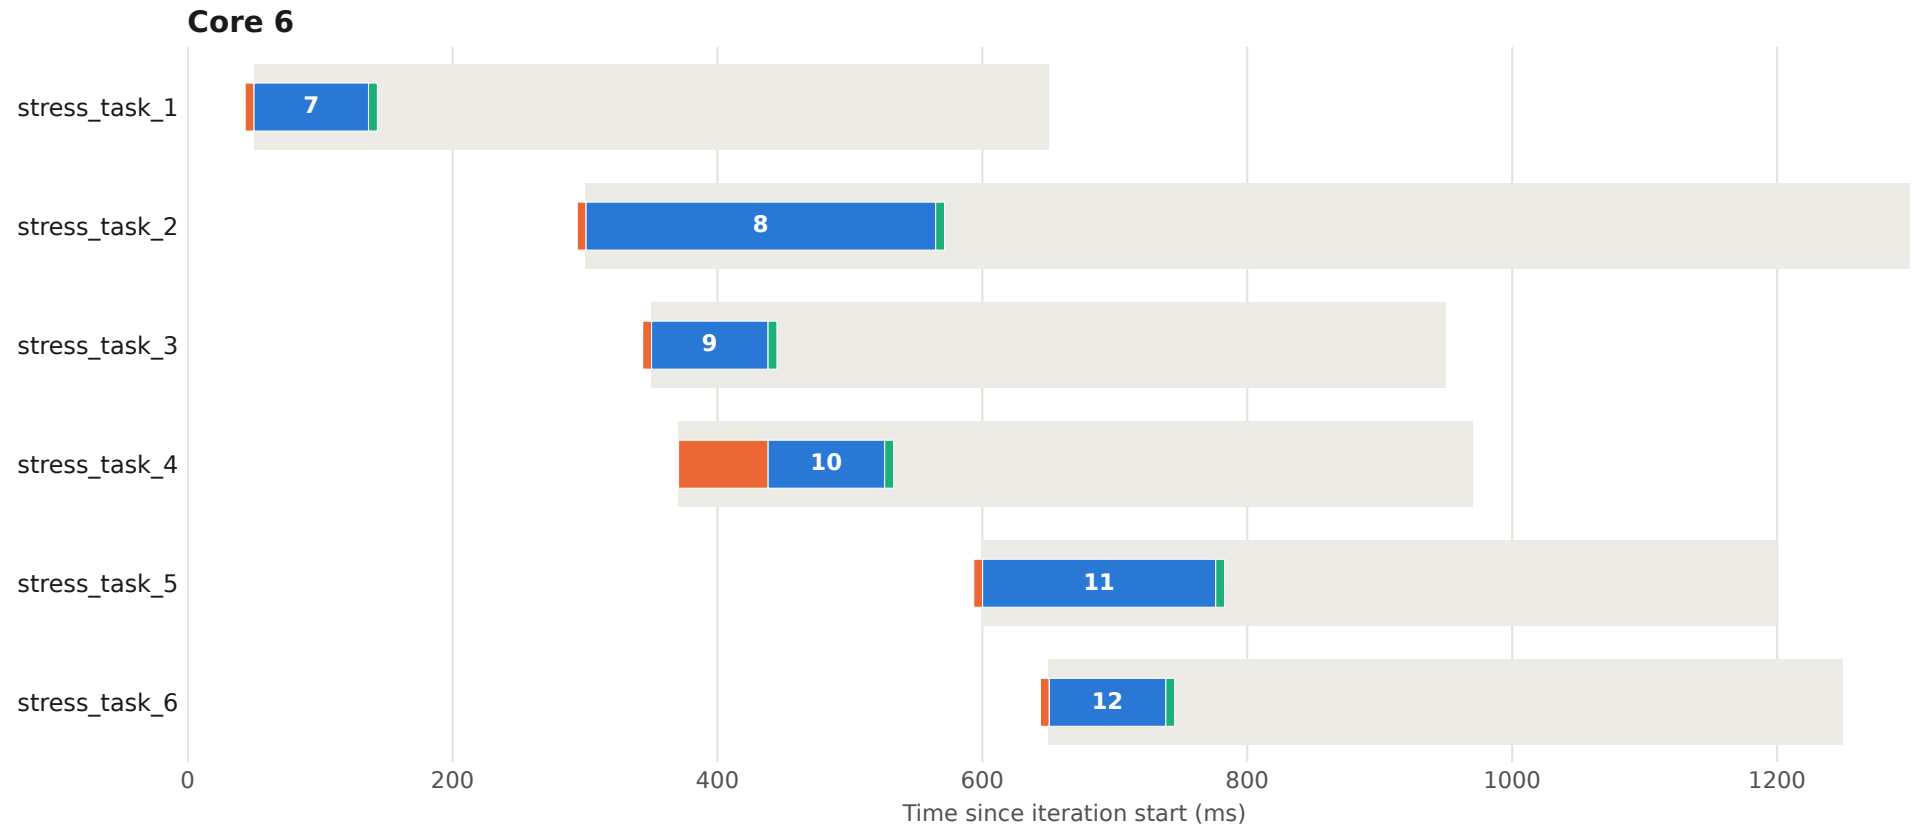


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 3 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

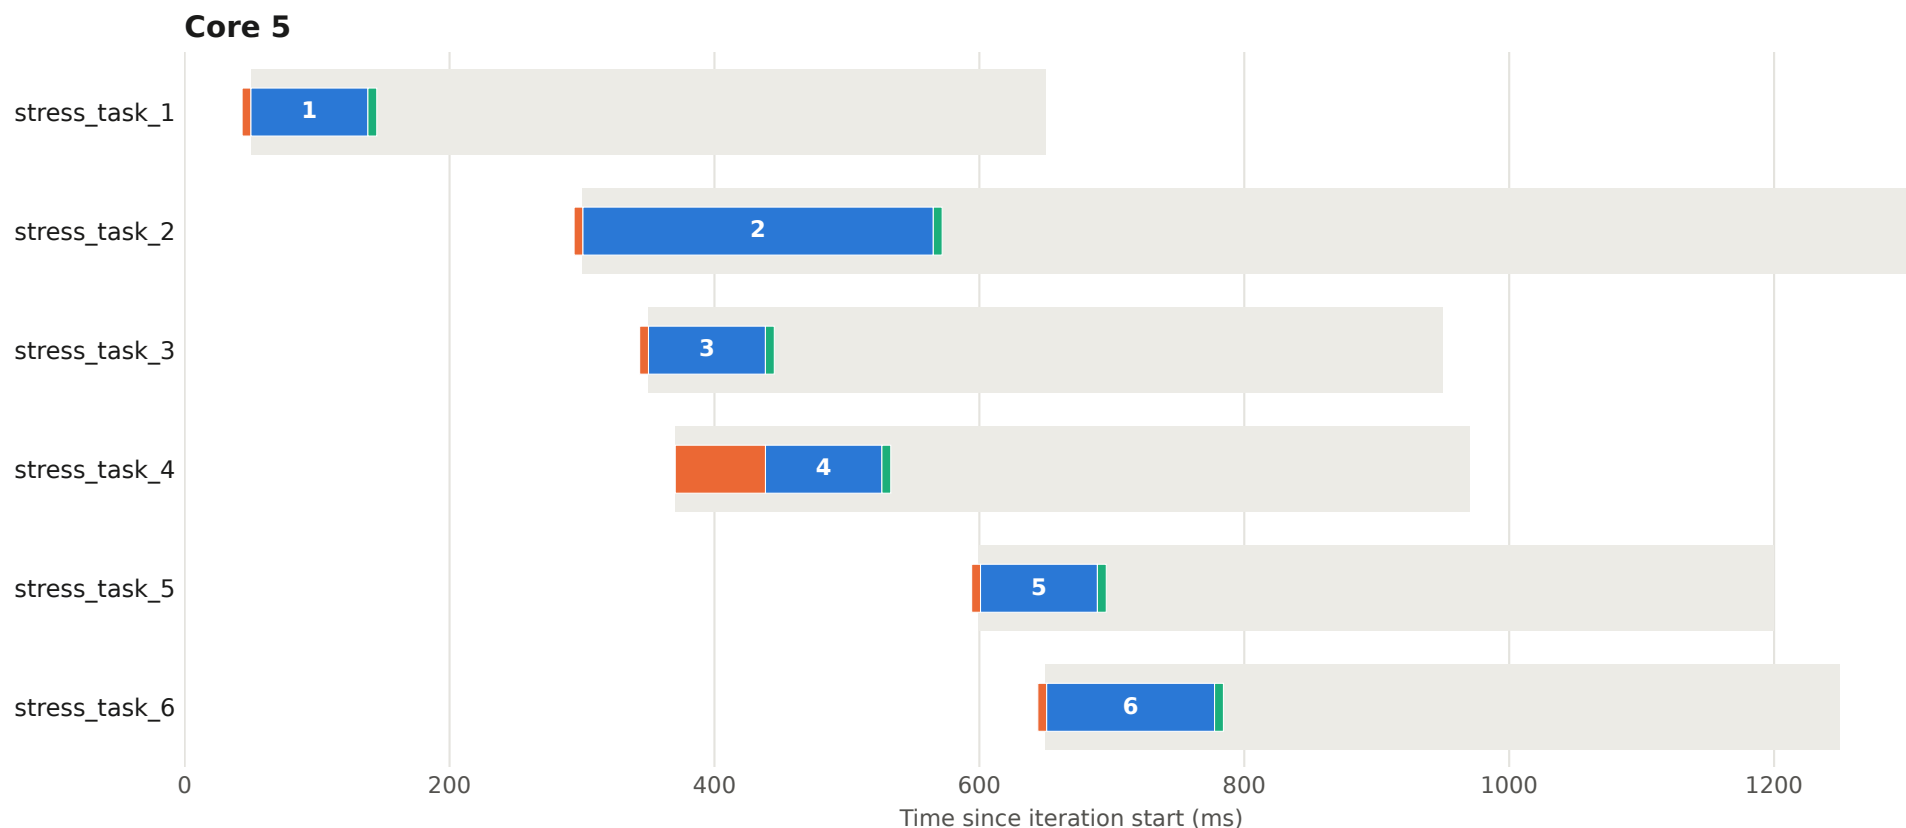


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 3 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

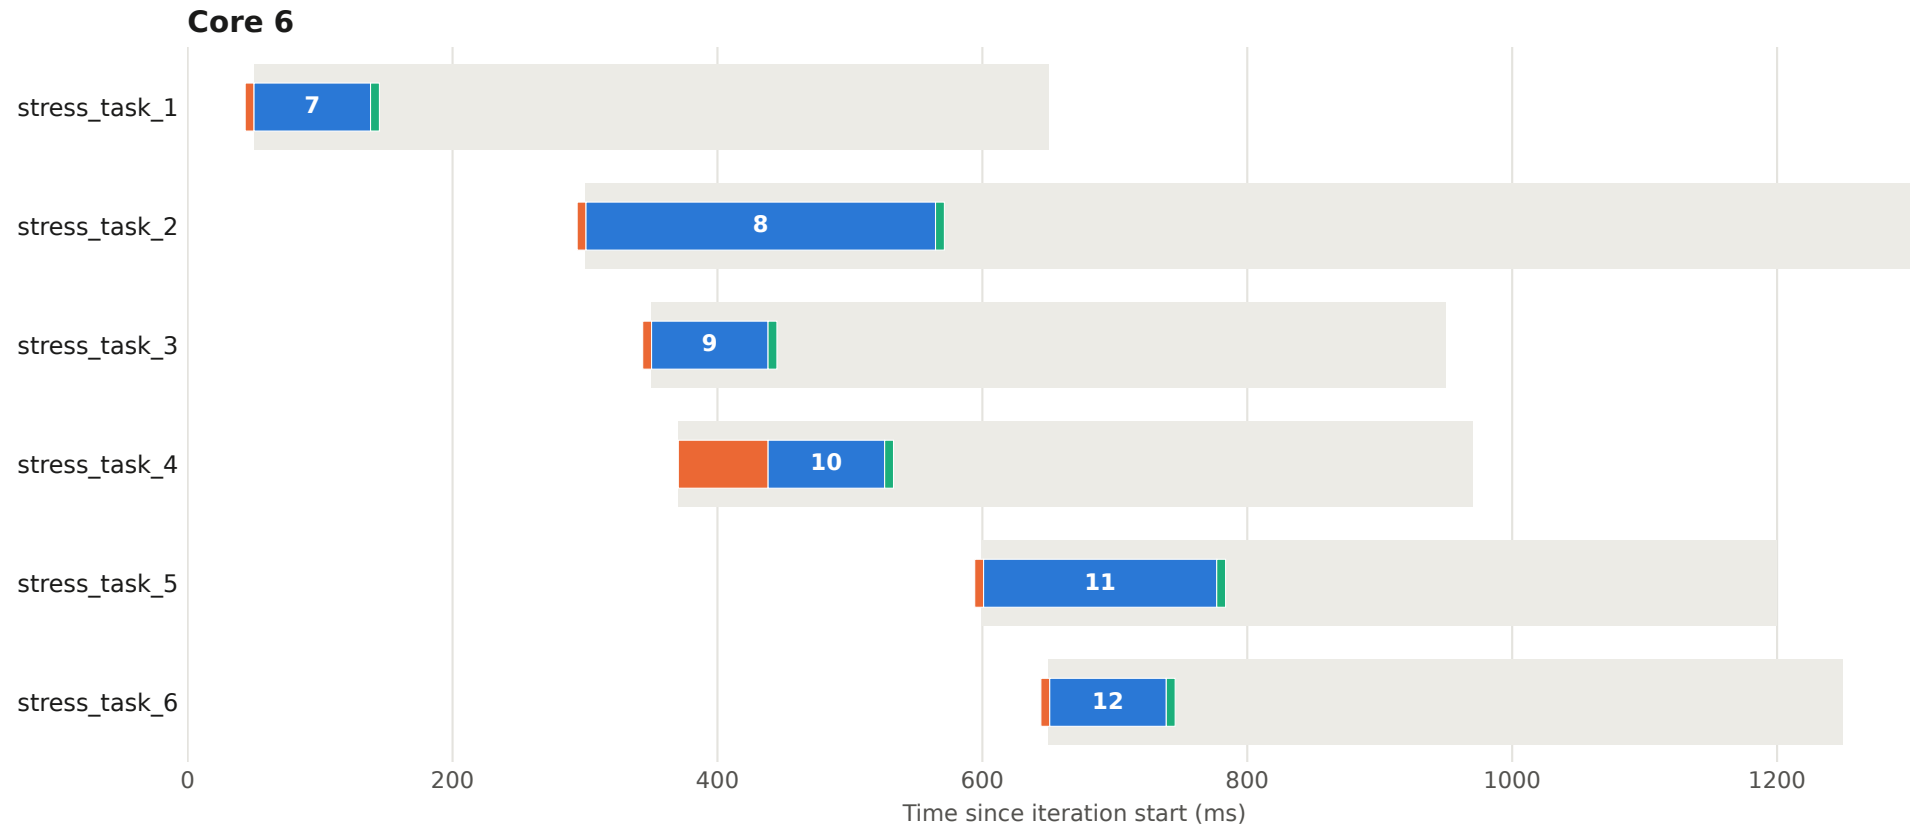


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 4 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

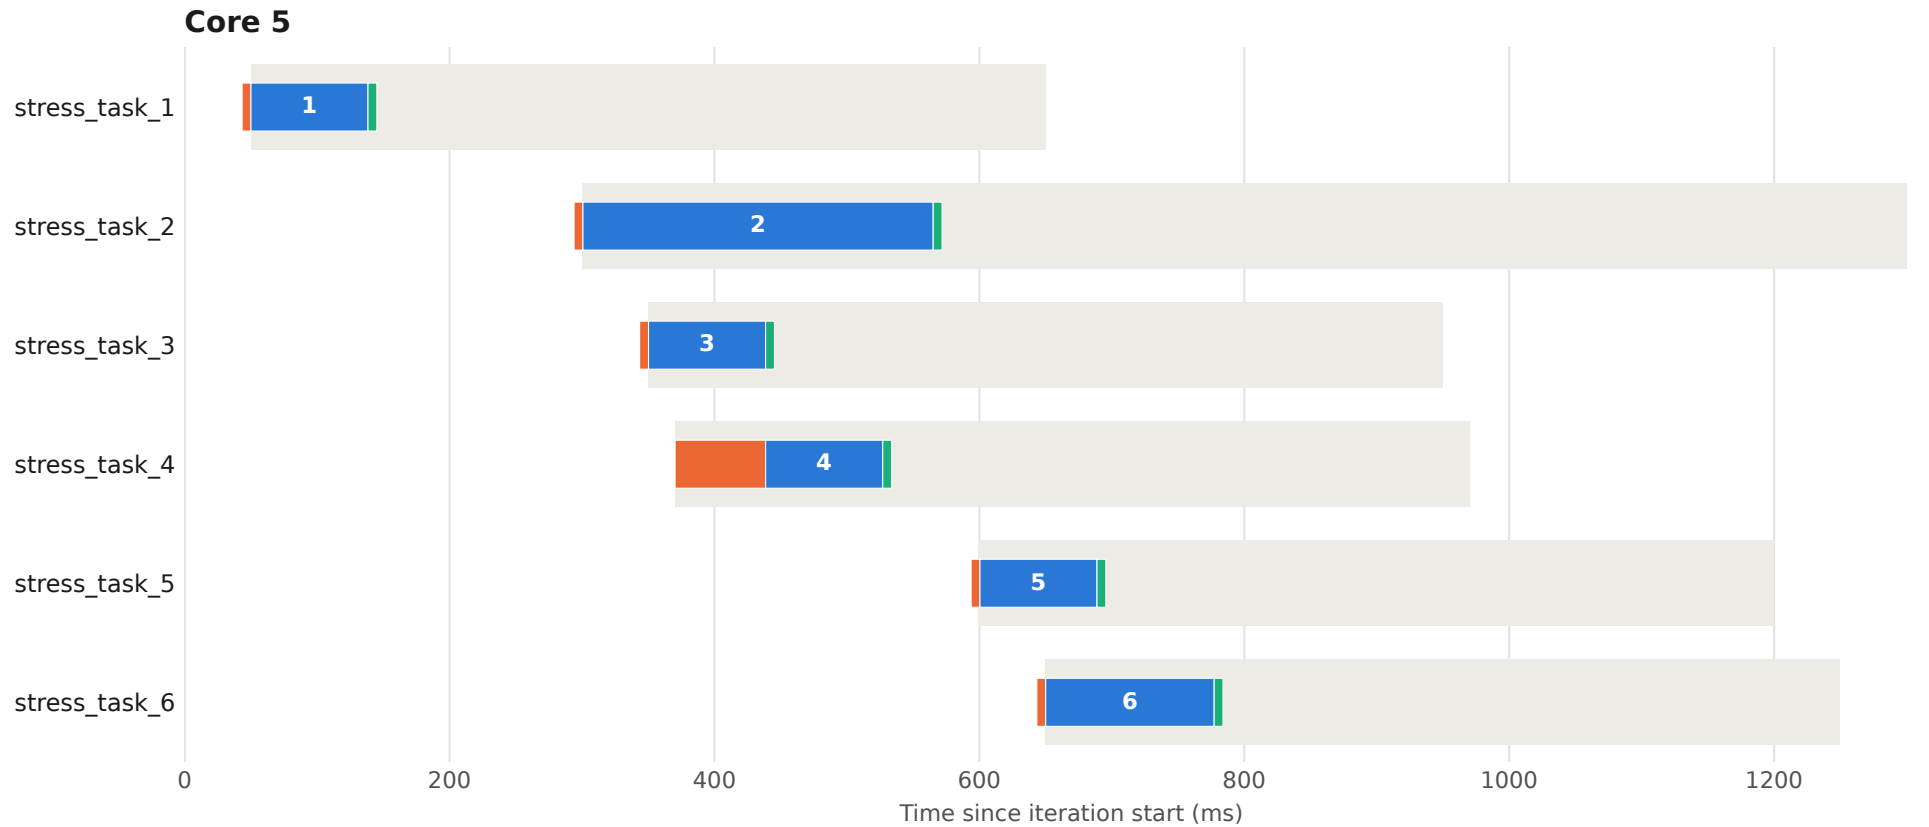


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 4 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

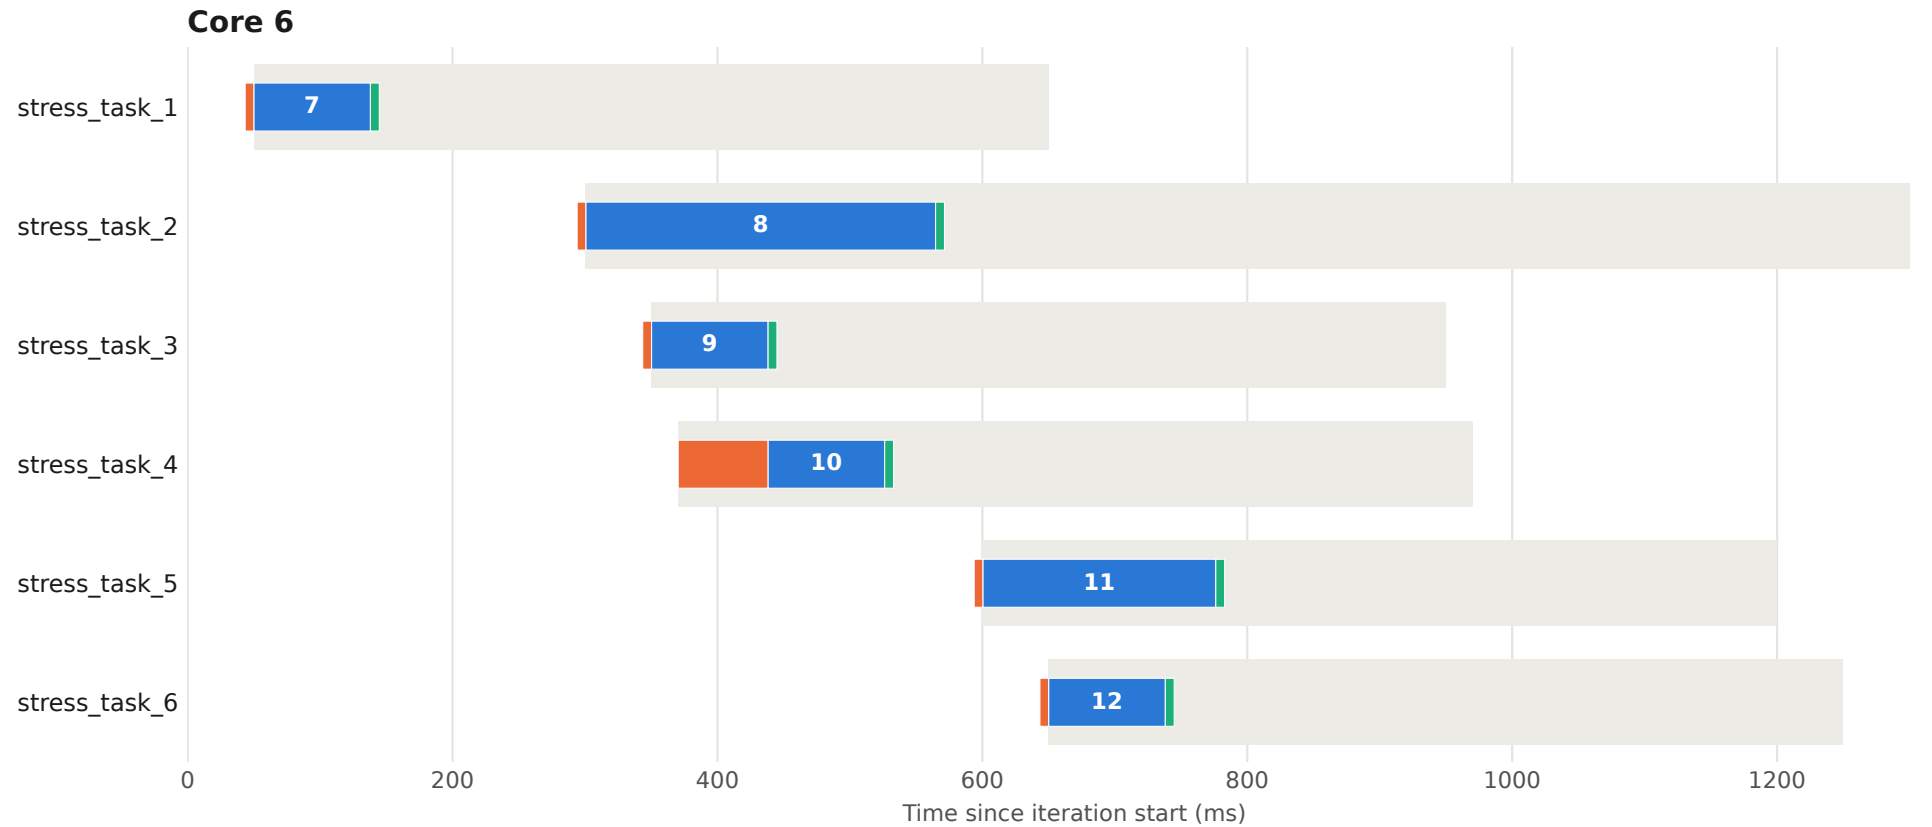


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 5 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

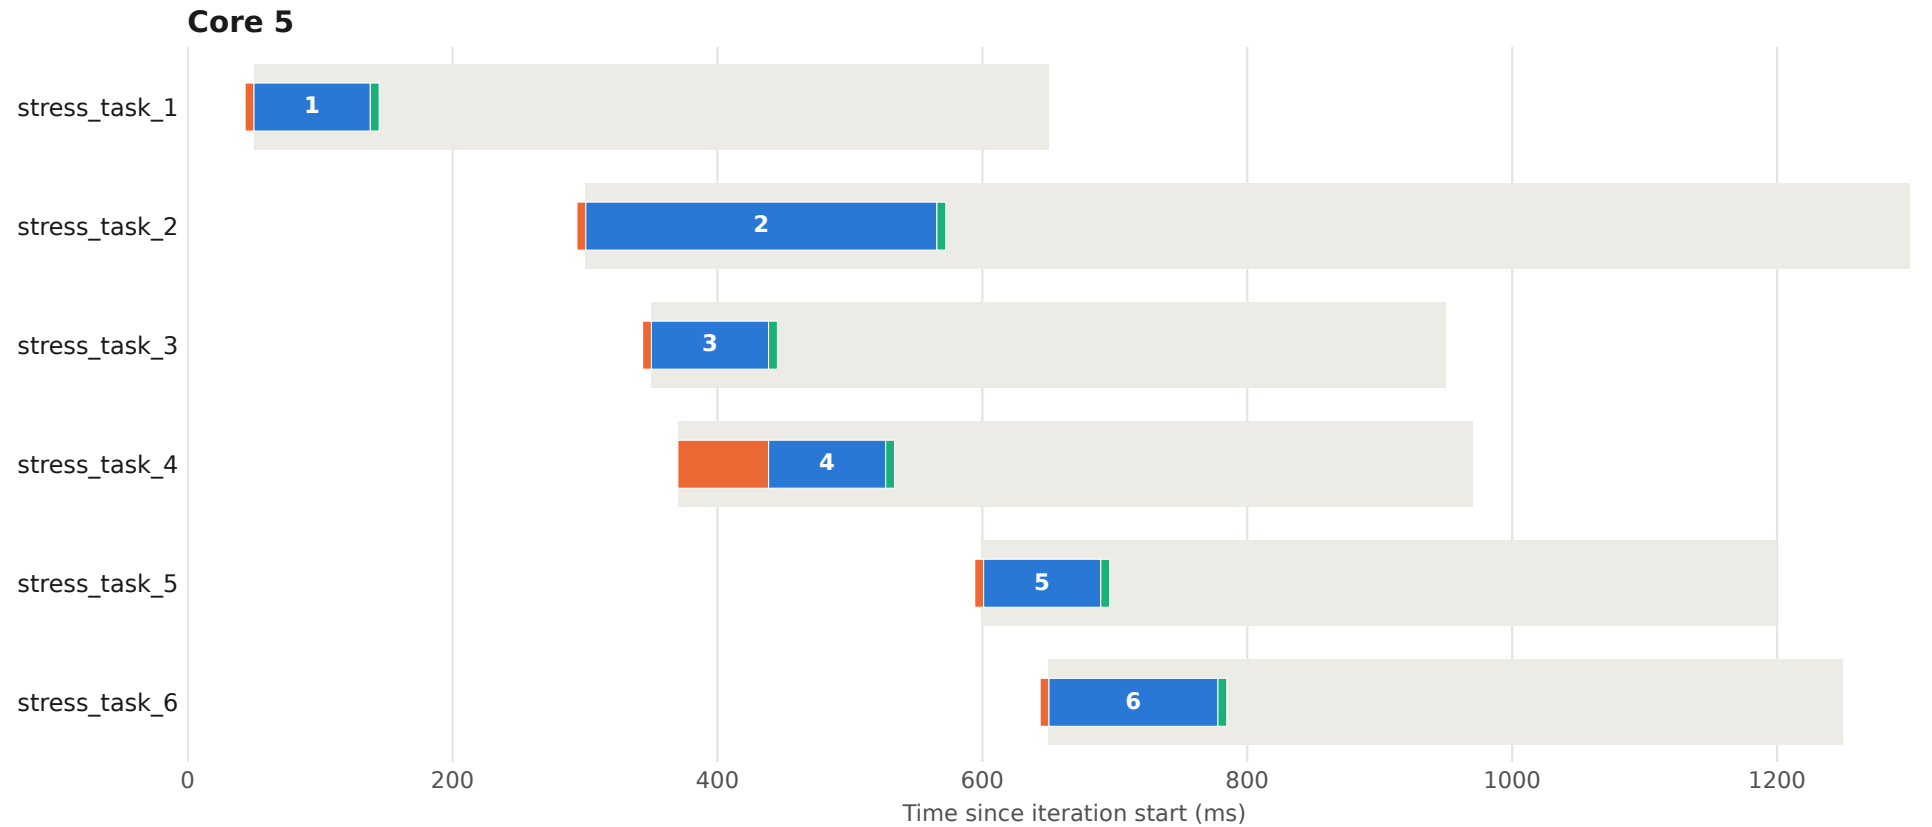


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 5 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

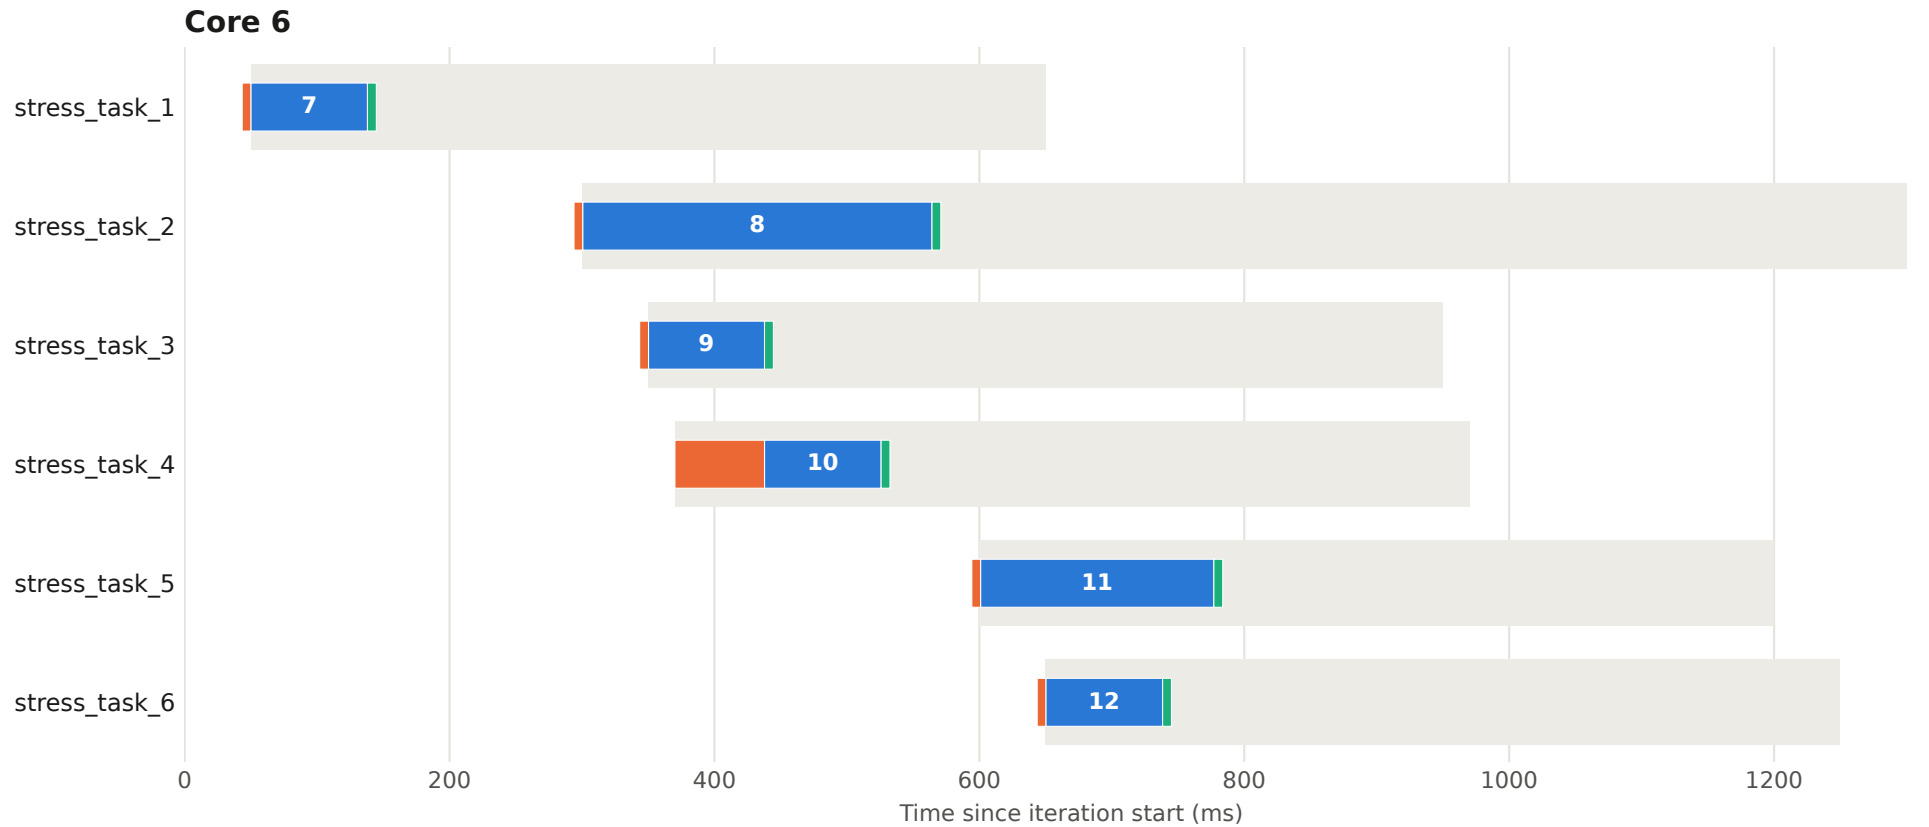


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 6 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

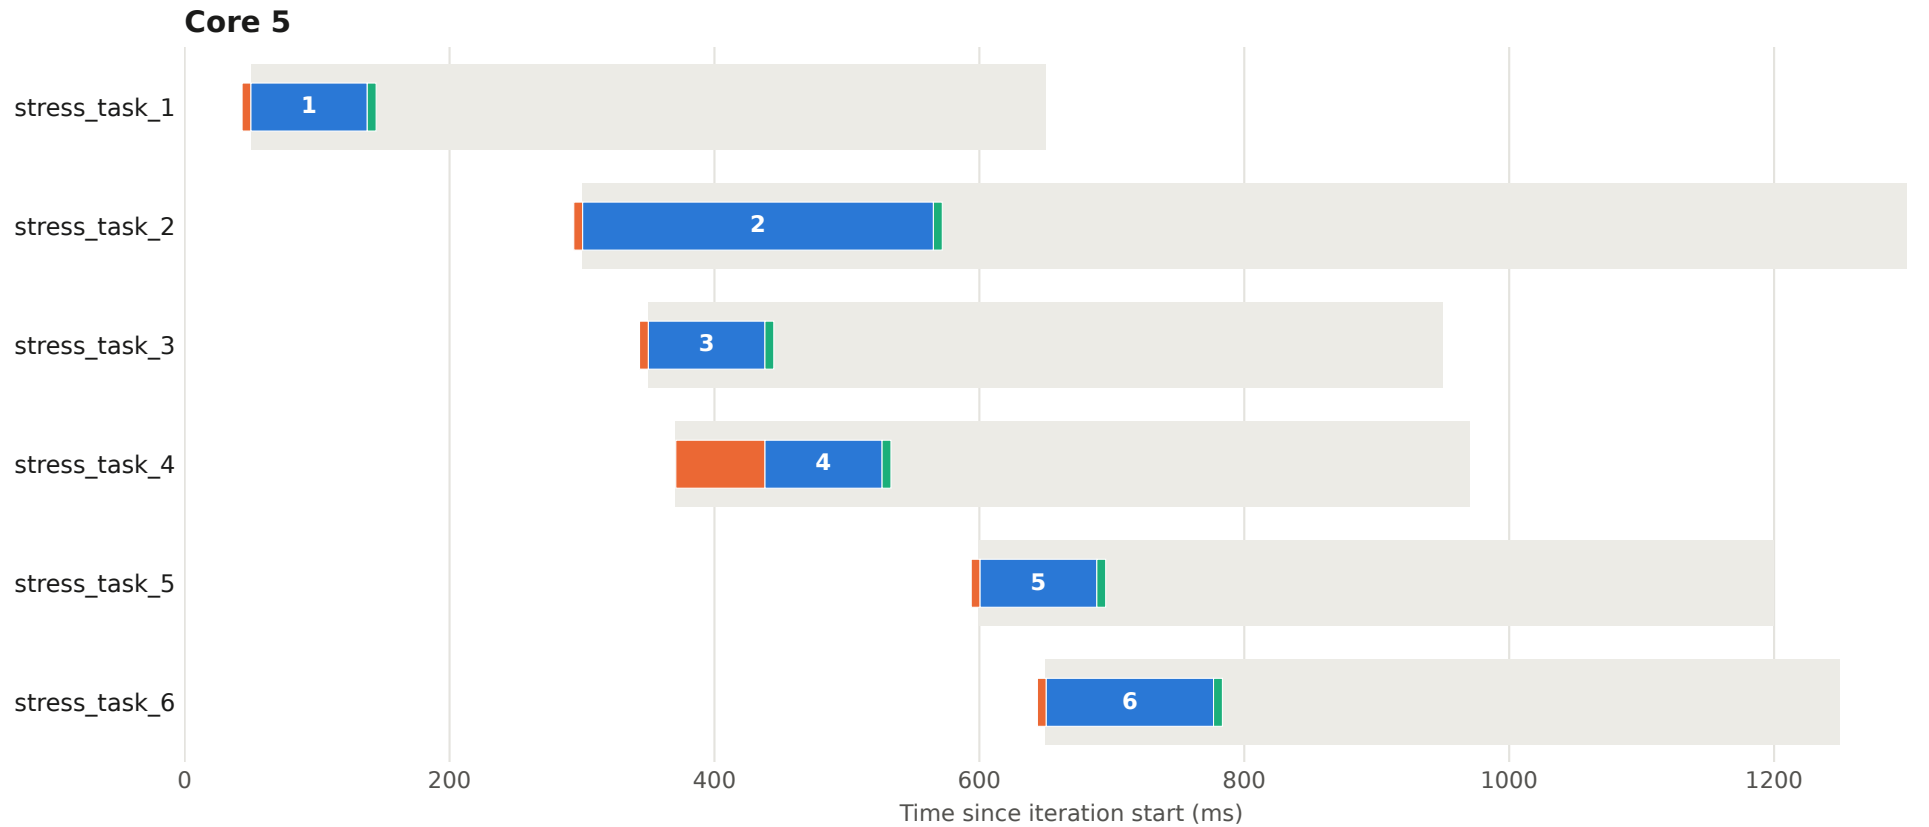


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 6 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

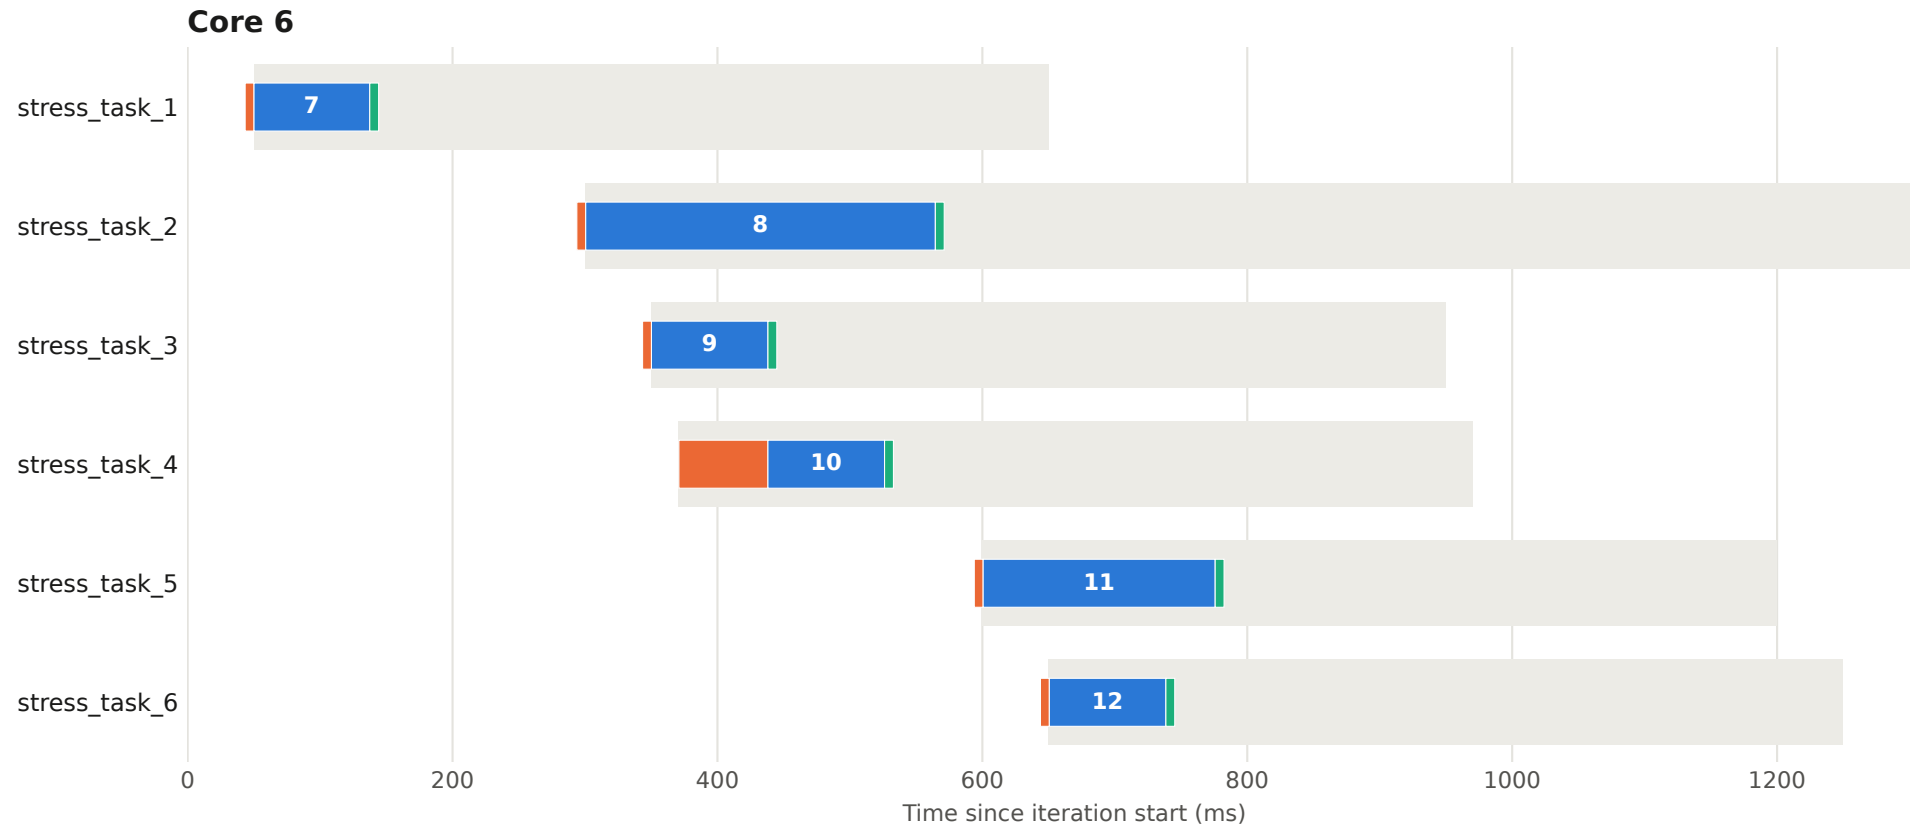


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 7 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

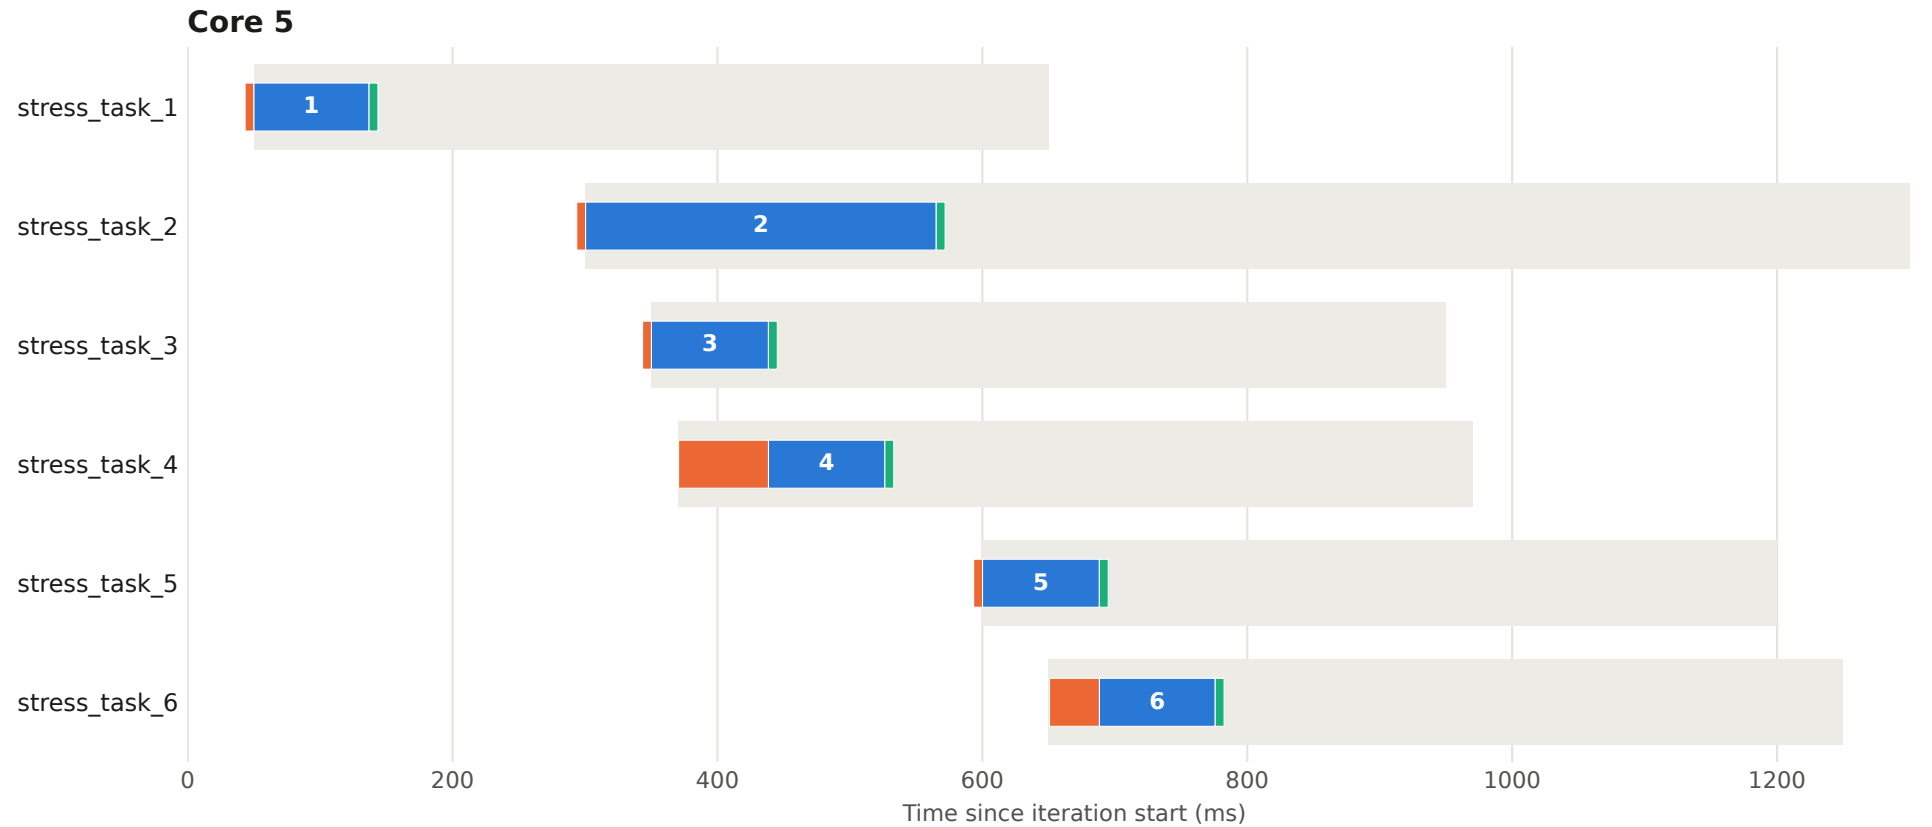


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 7 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

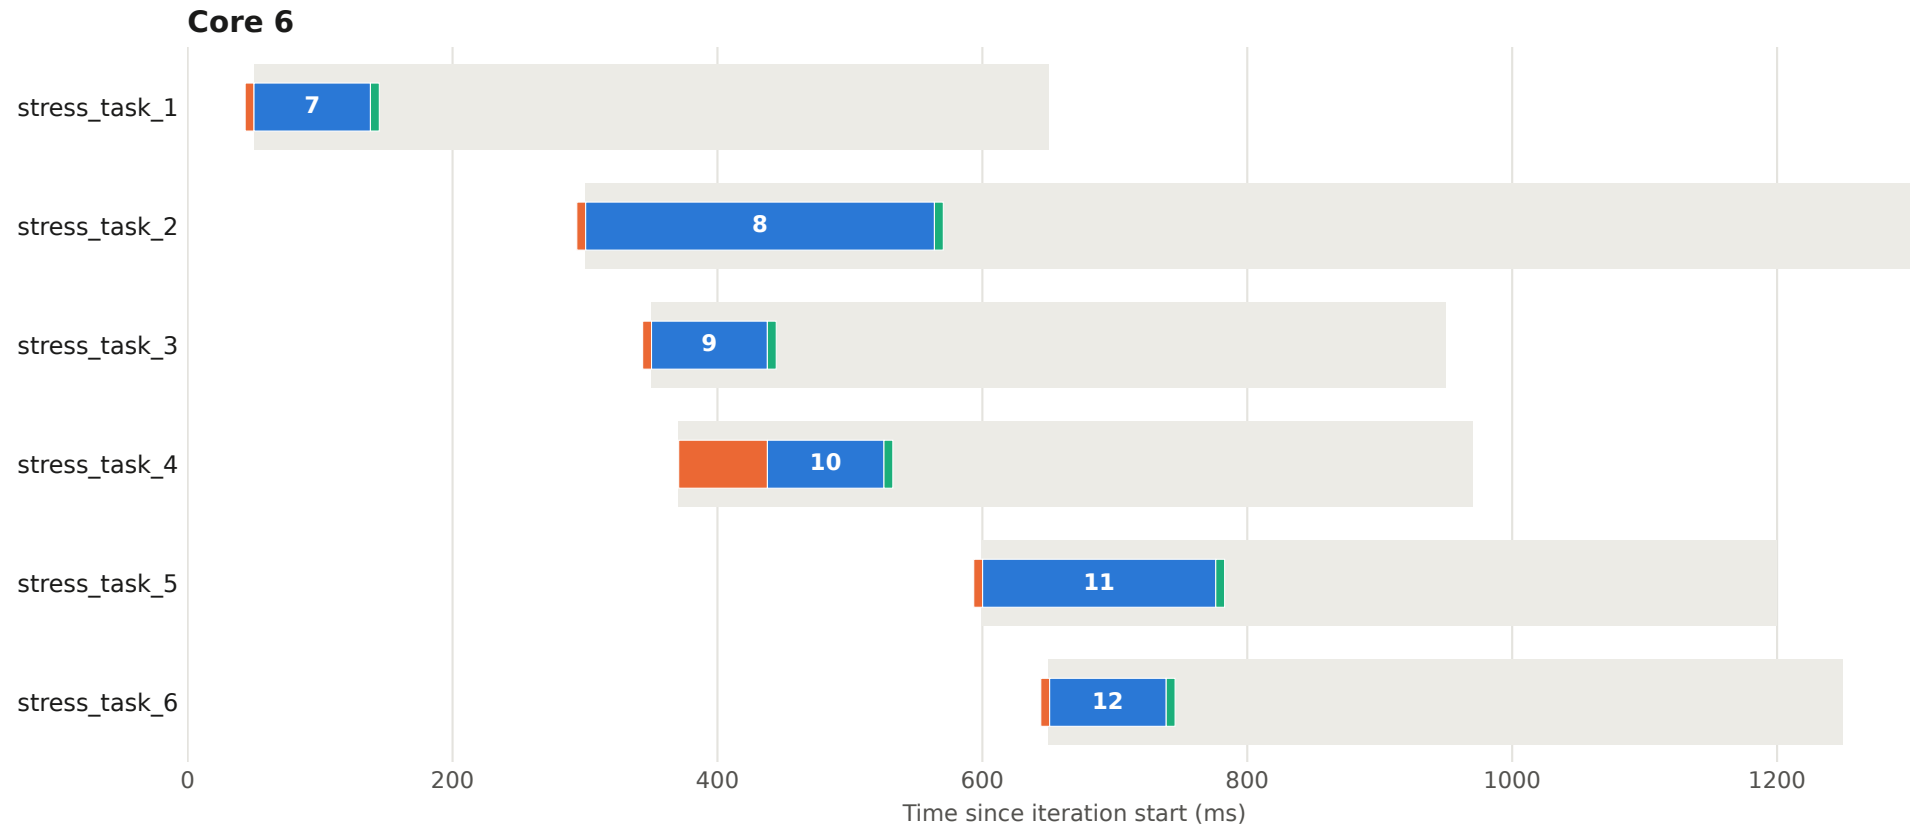


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 8 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

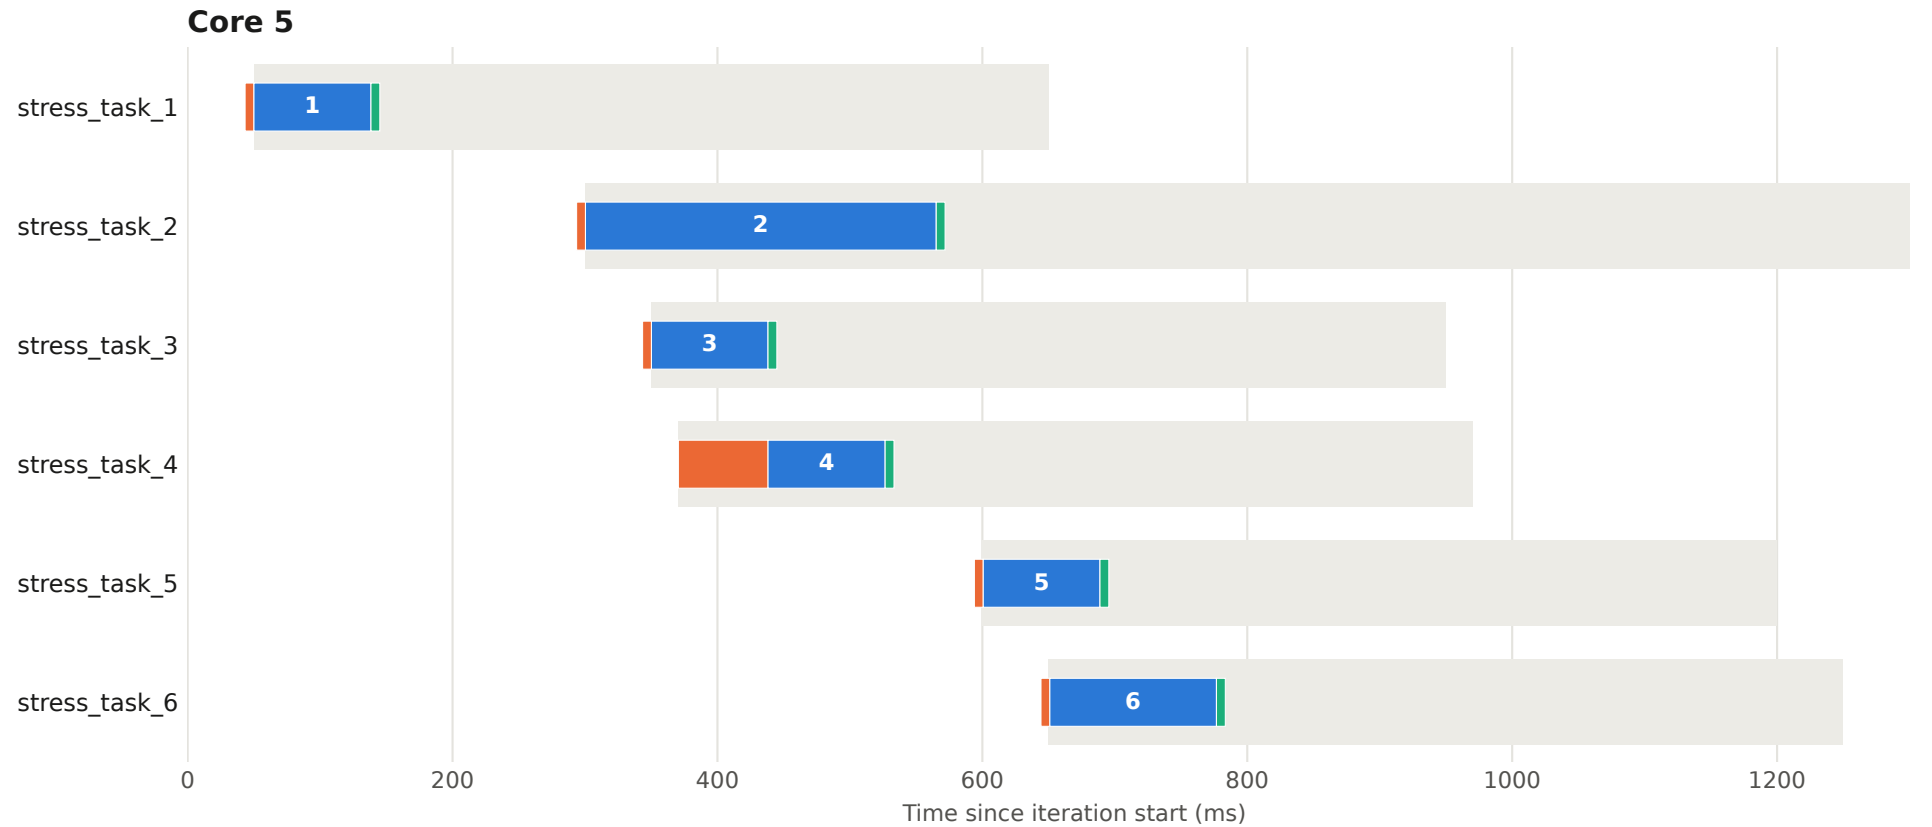


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 8 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

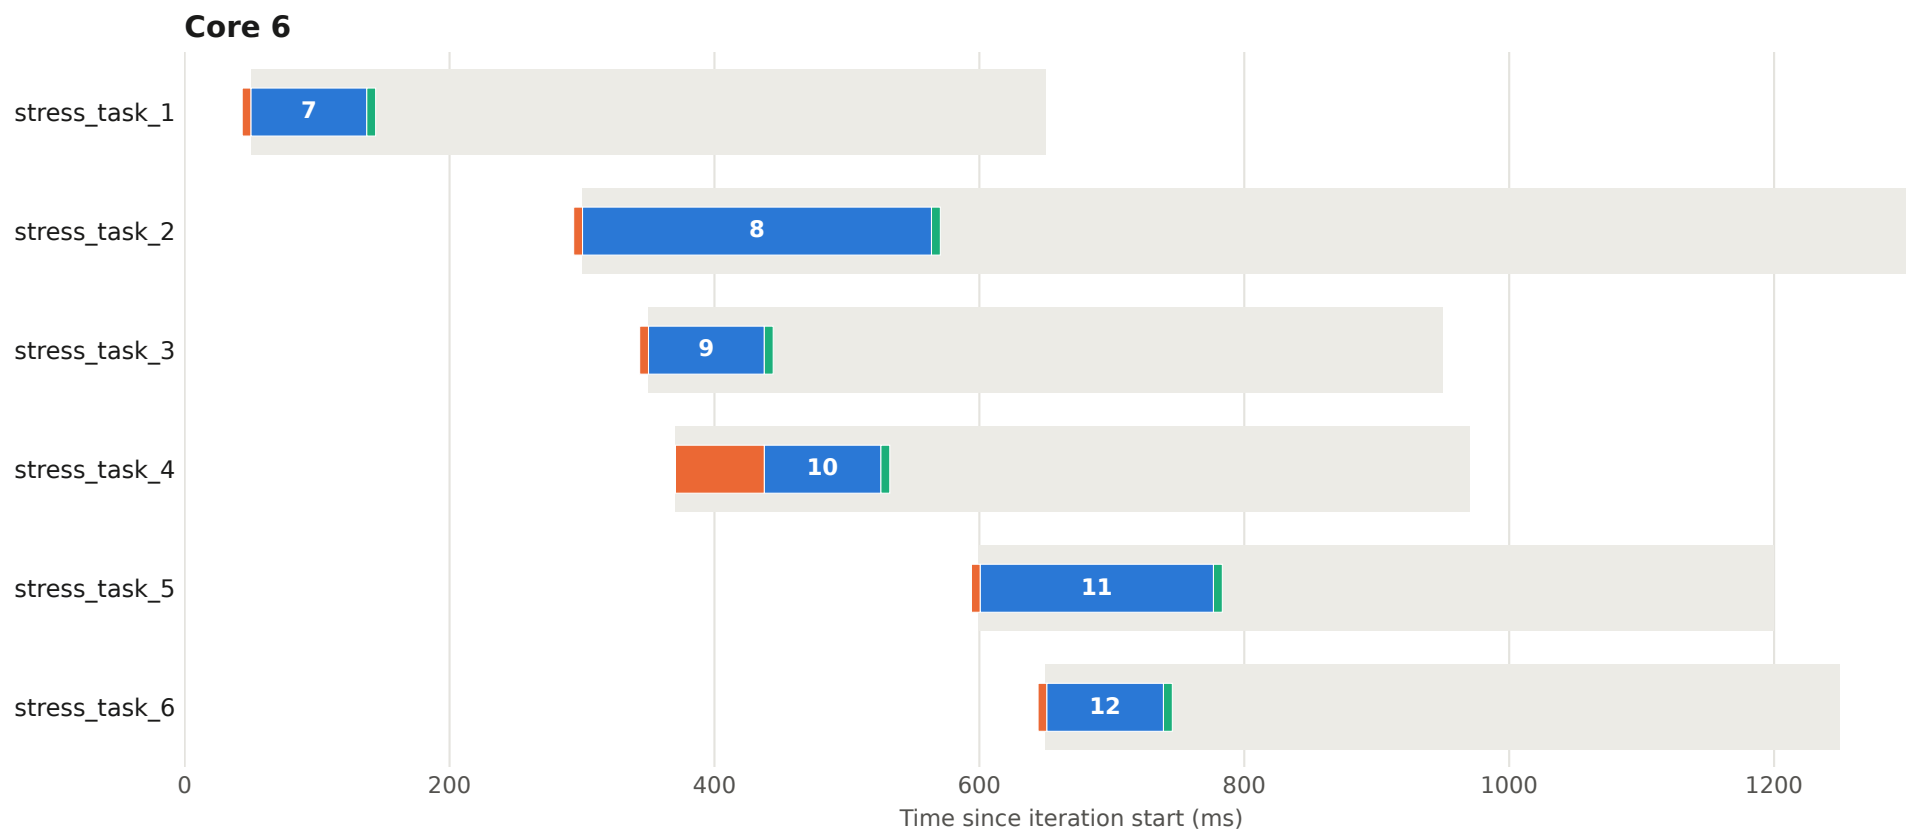


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 9 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

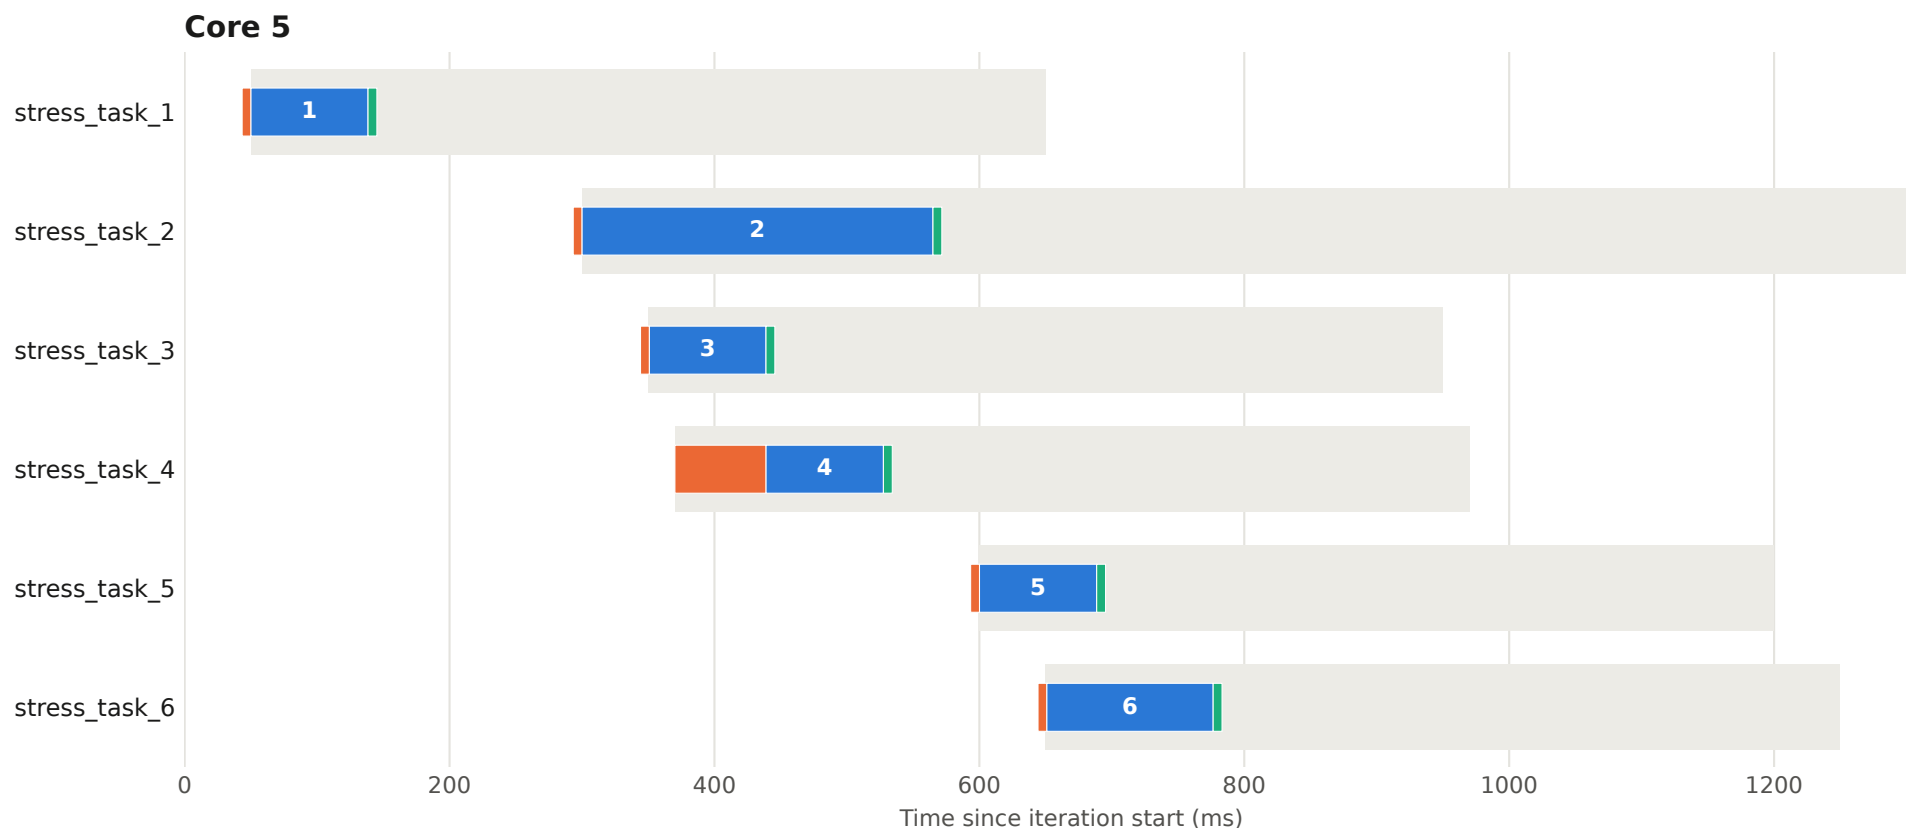


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 9 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

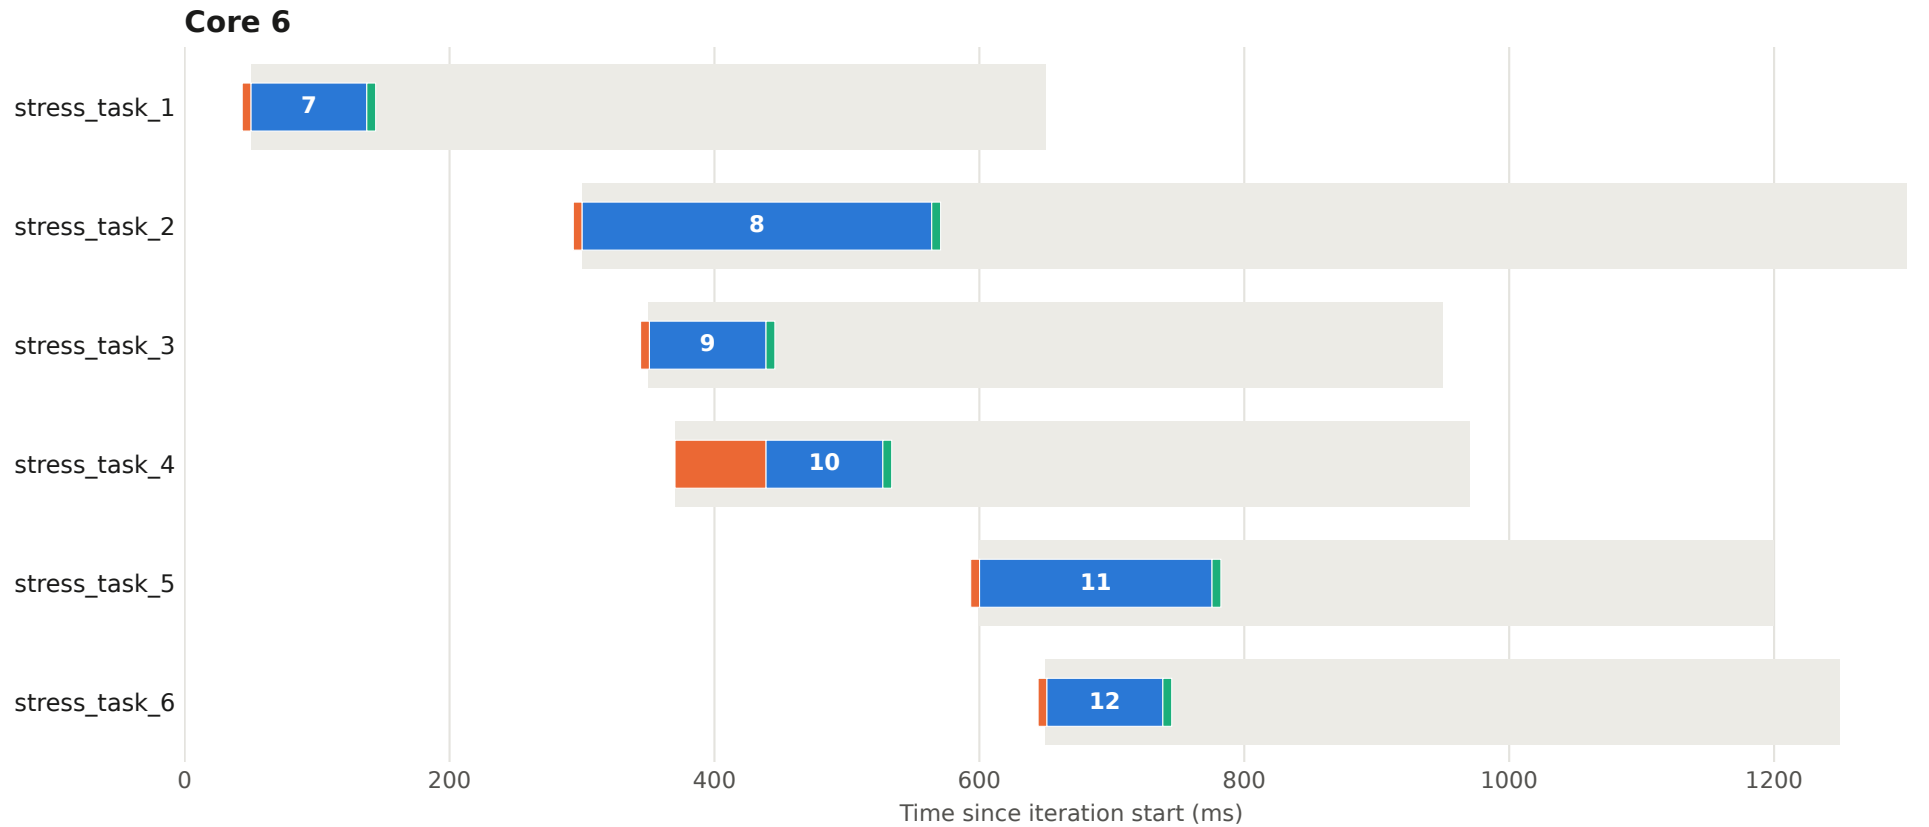


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 10 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

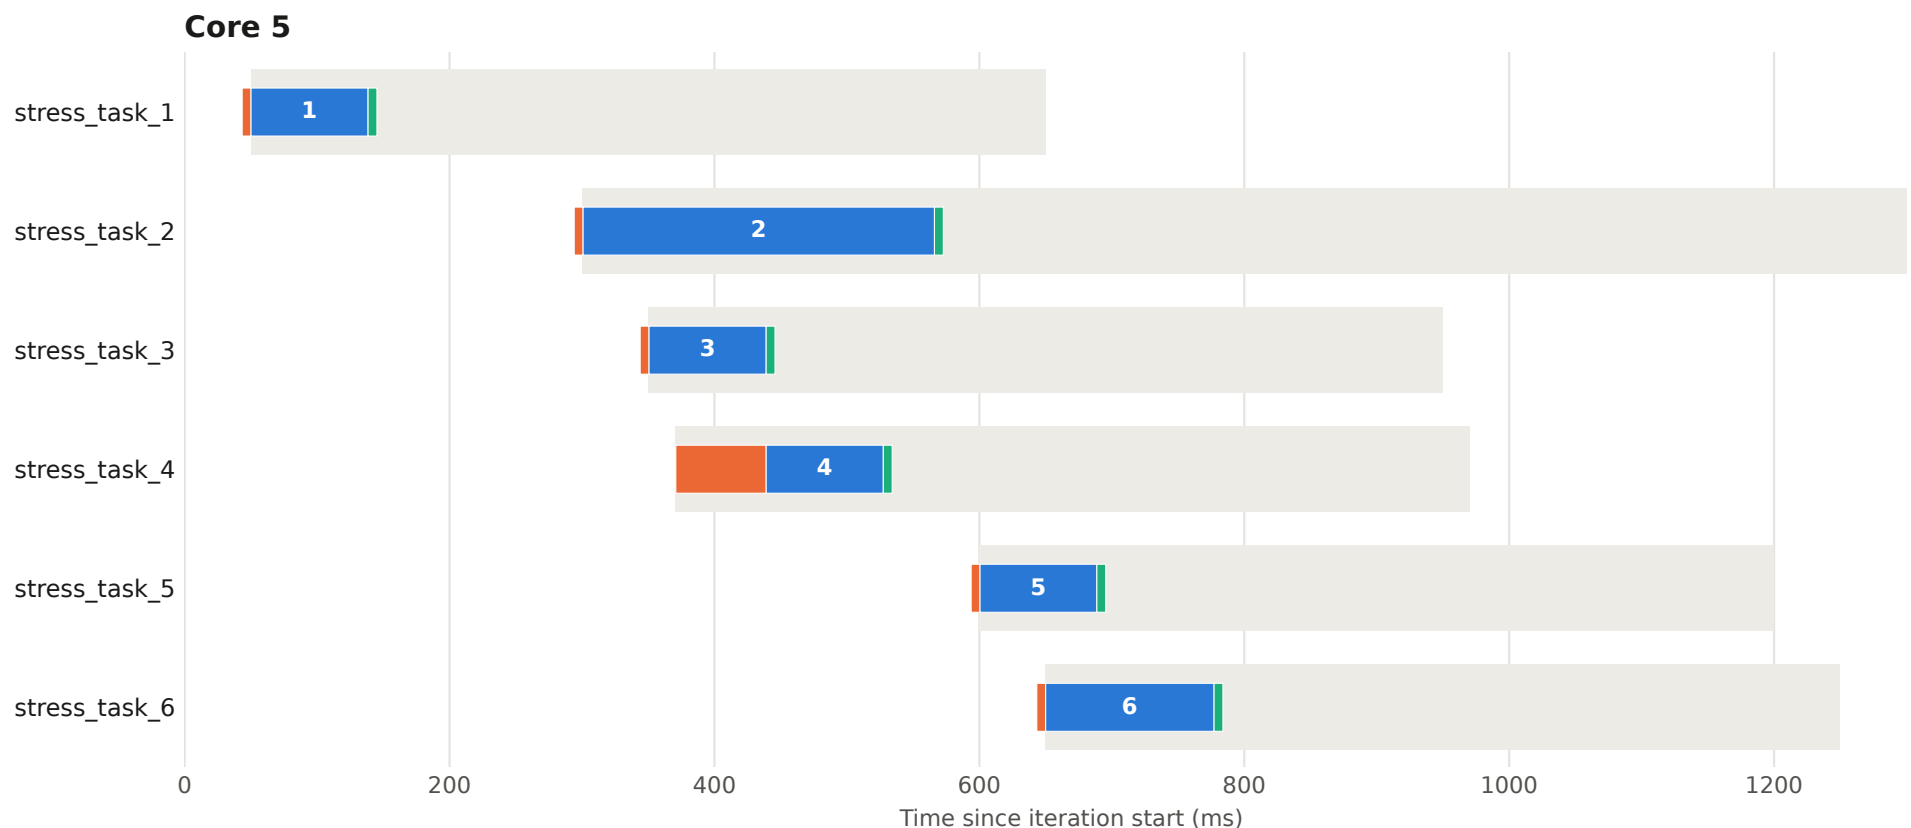


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 10 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

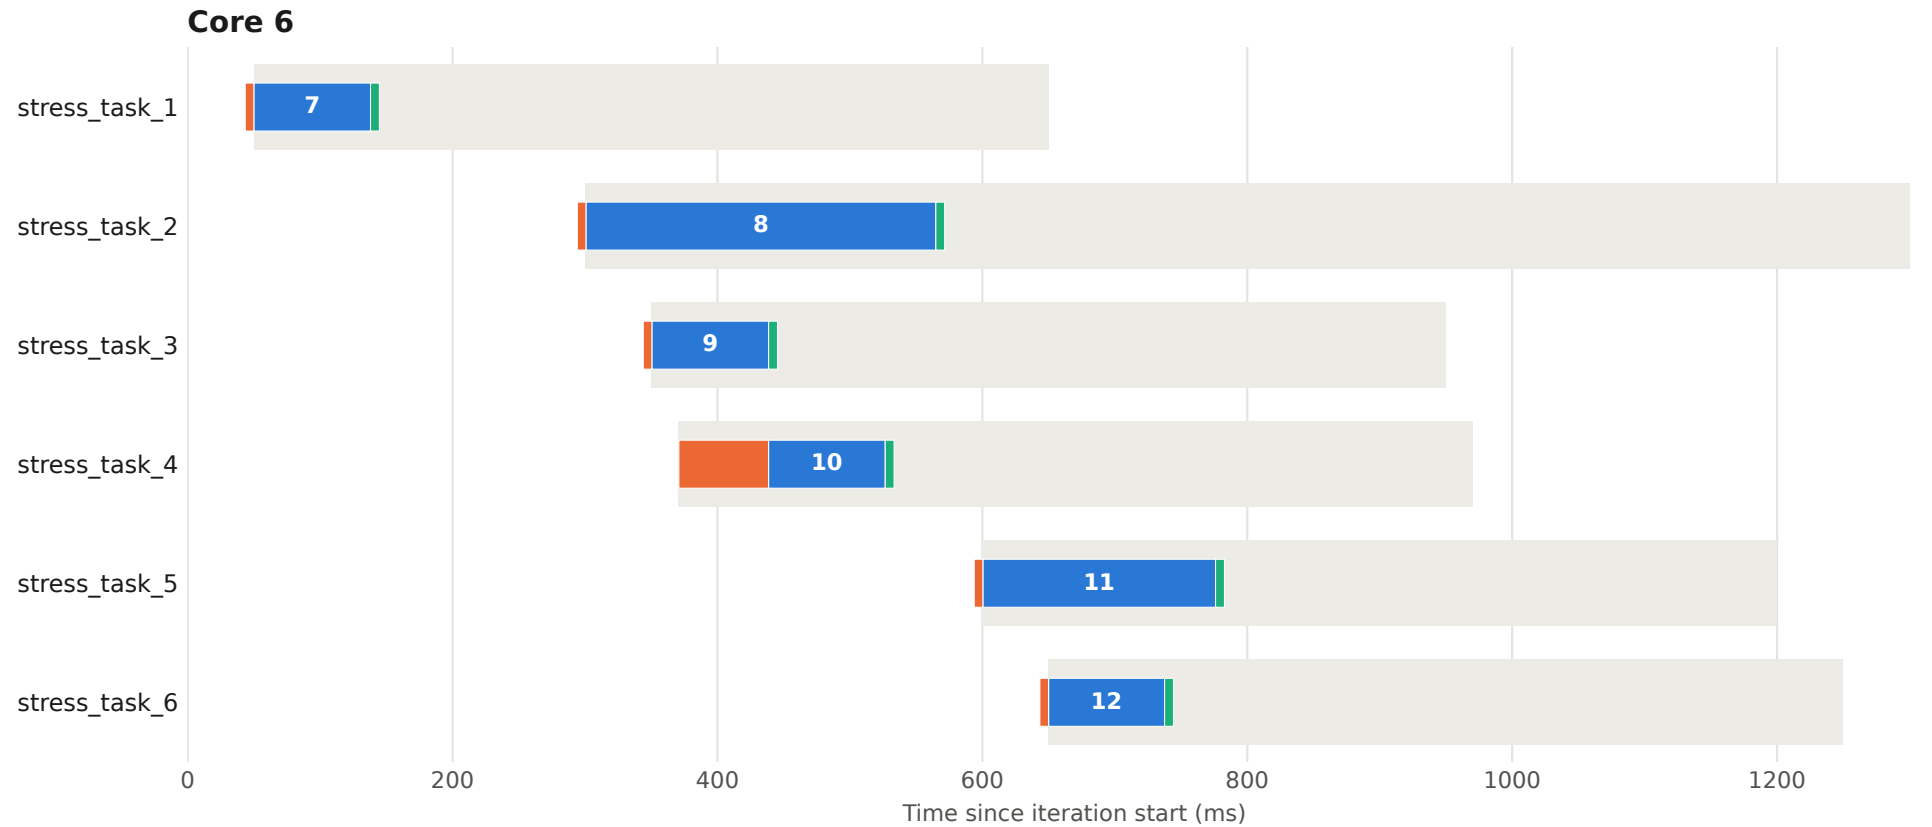


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 11 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

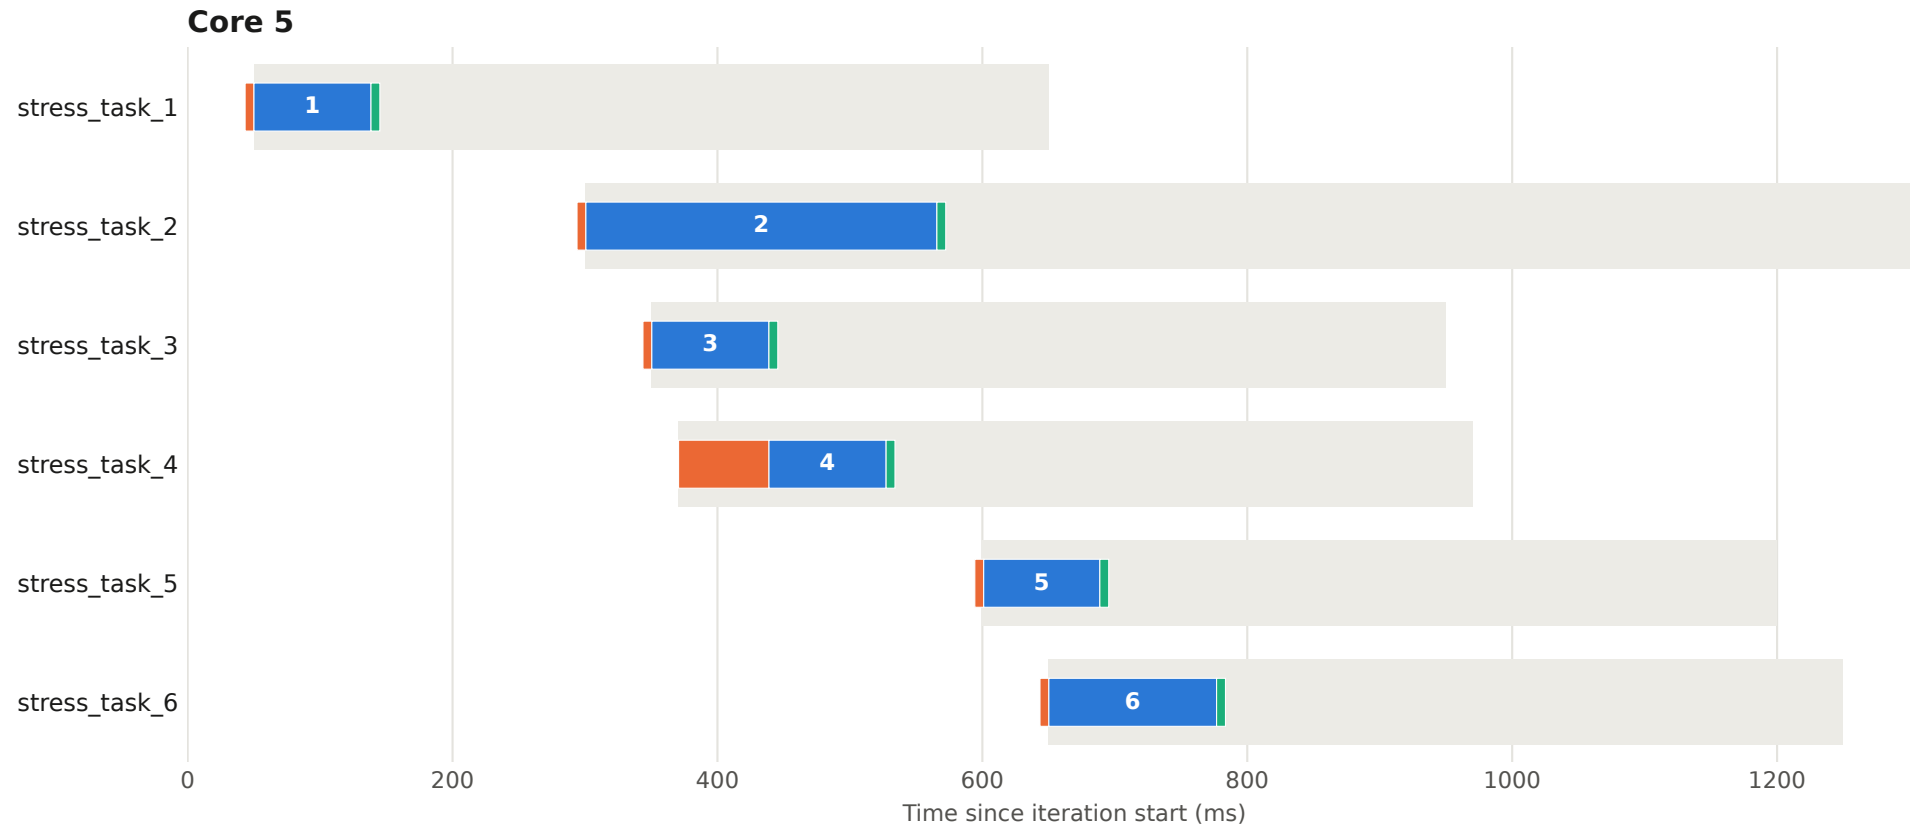


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 11 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

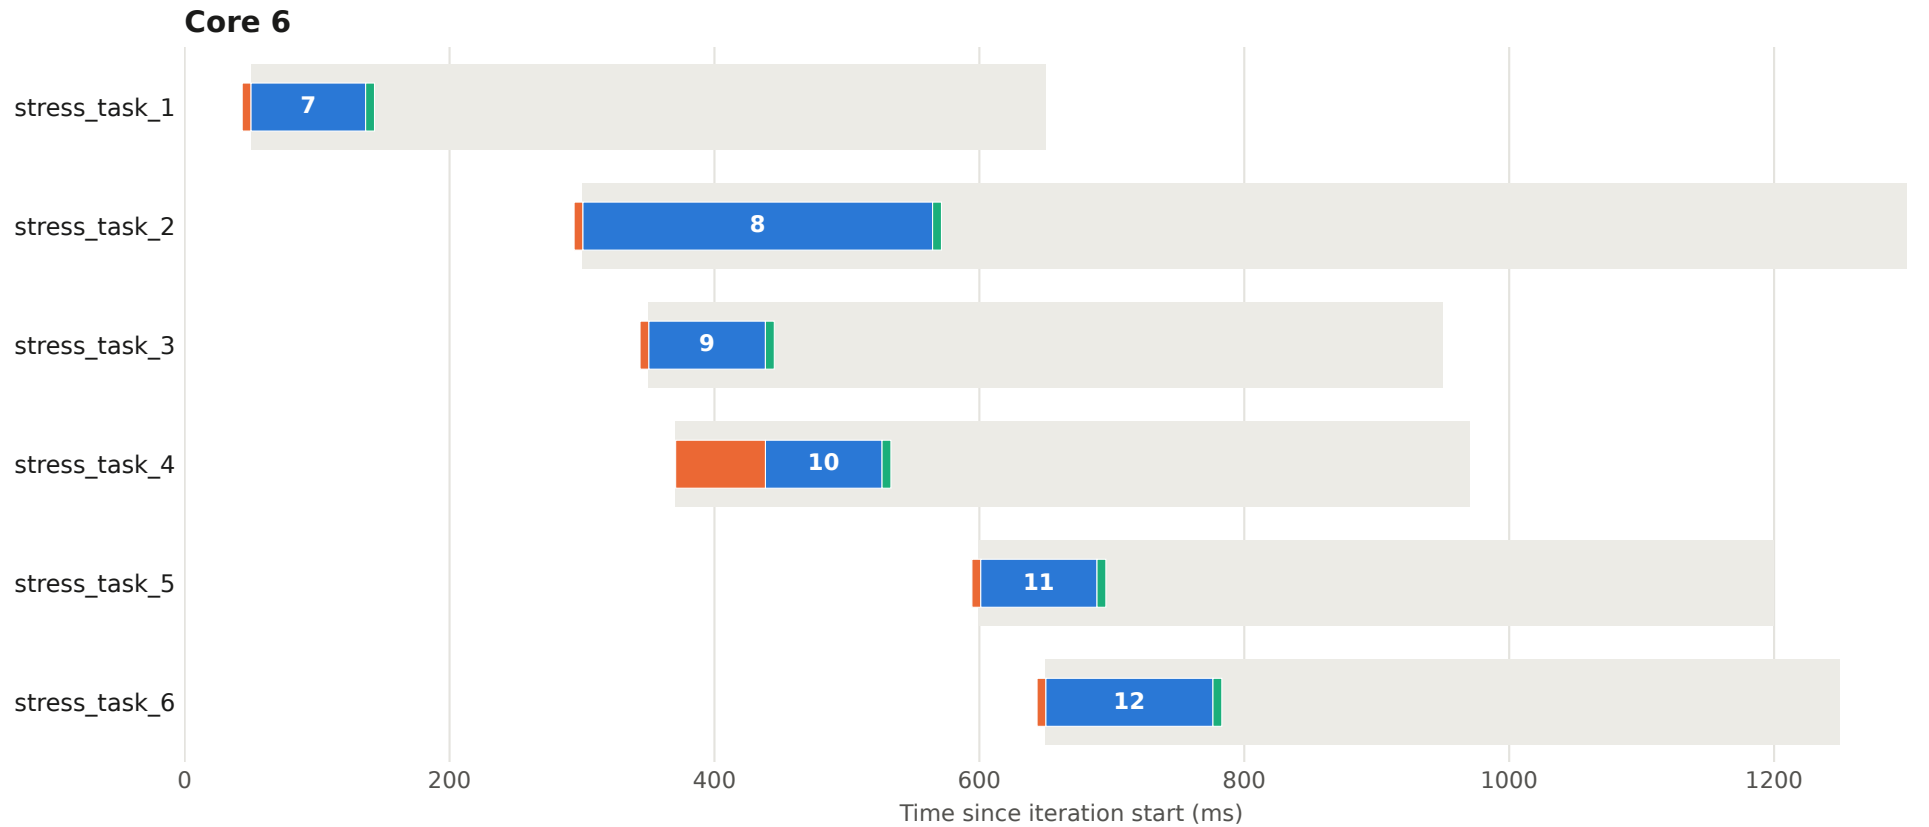


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 12 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

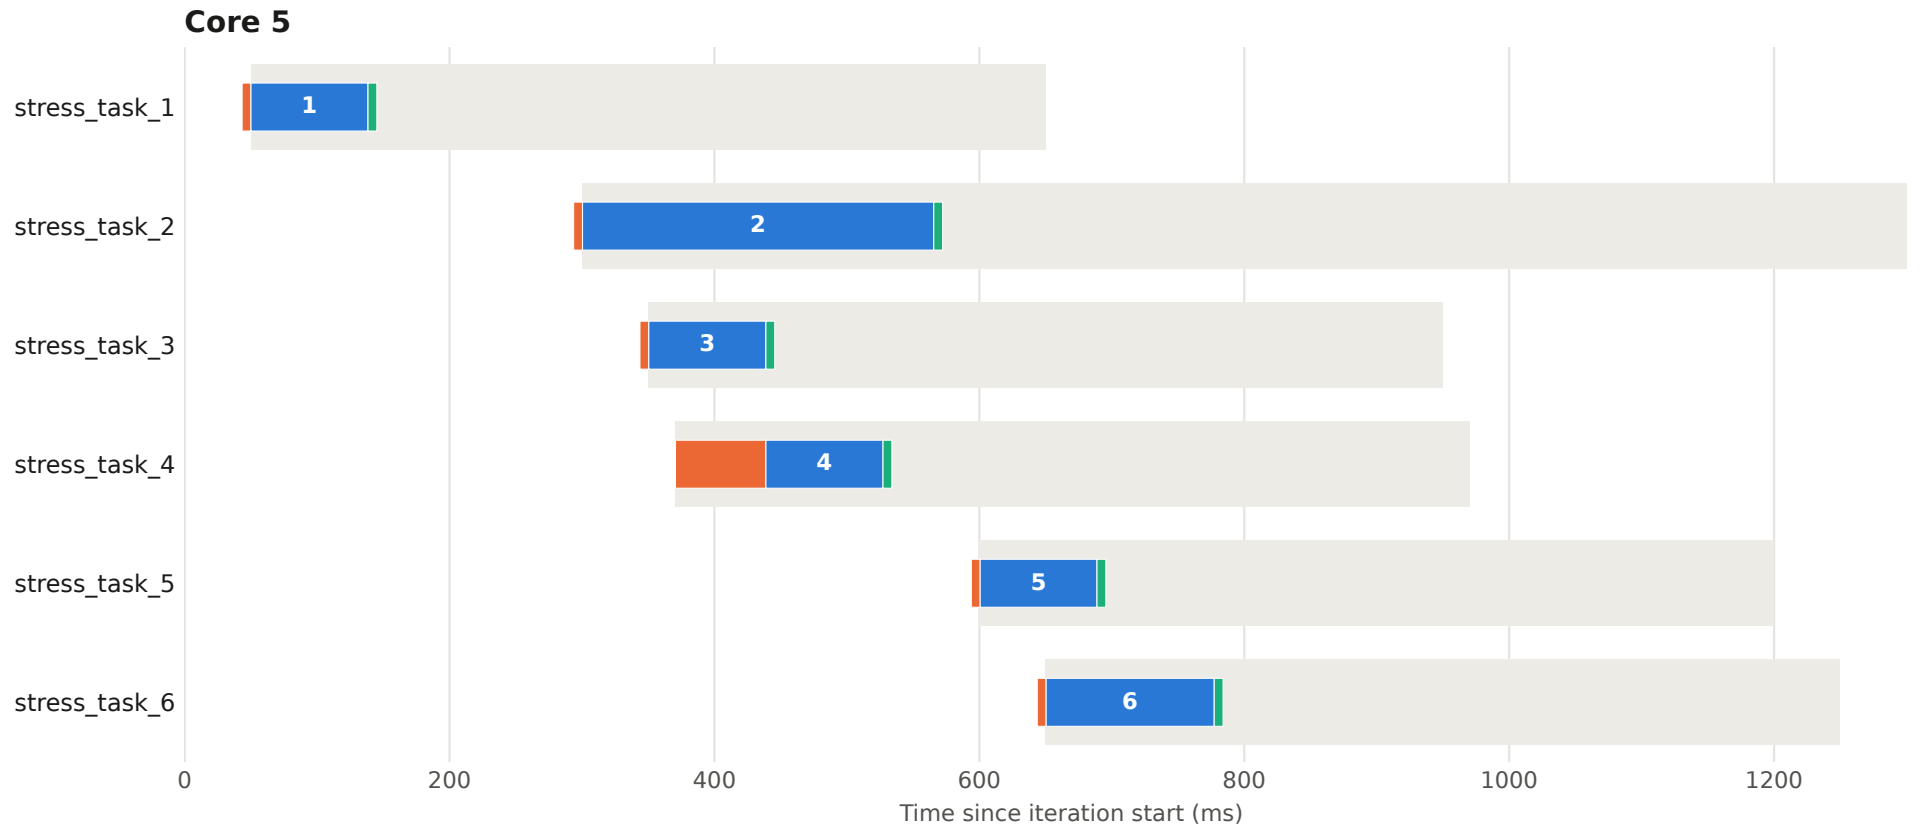


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 12 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

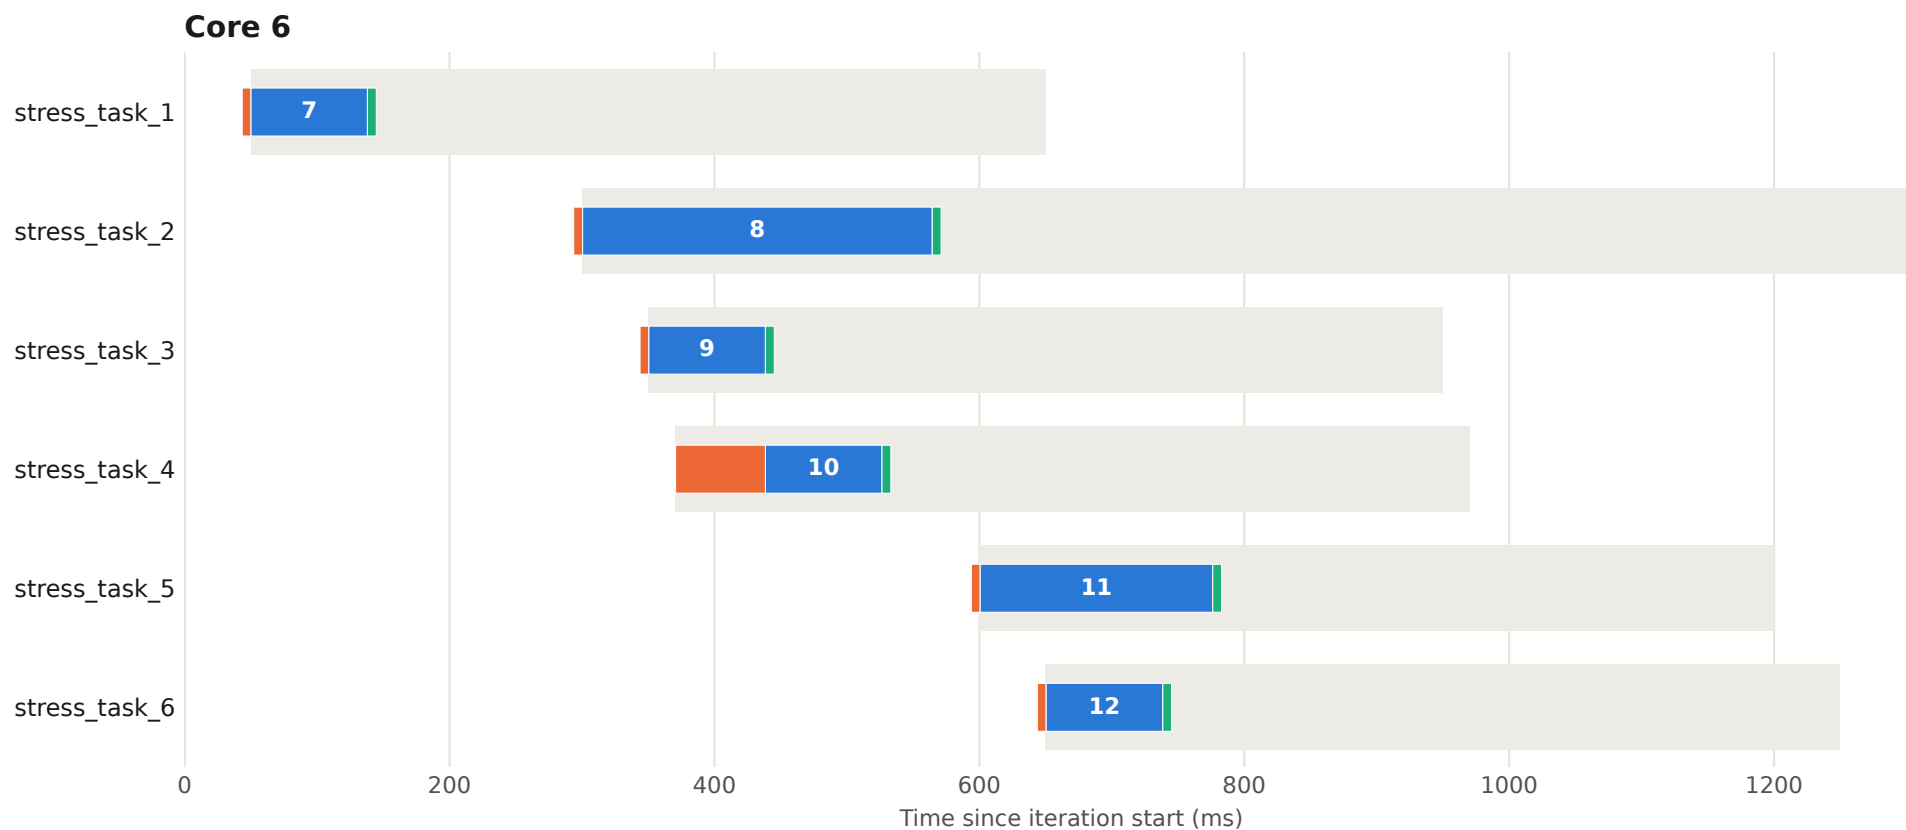


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 13 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

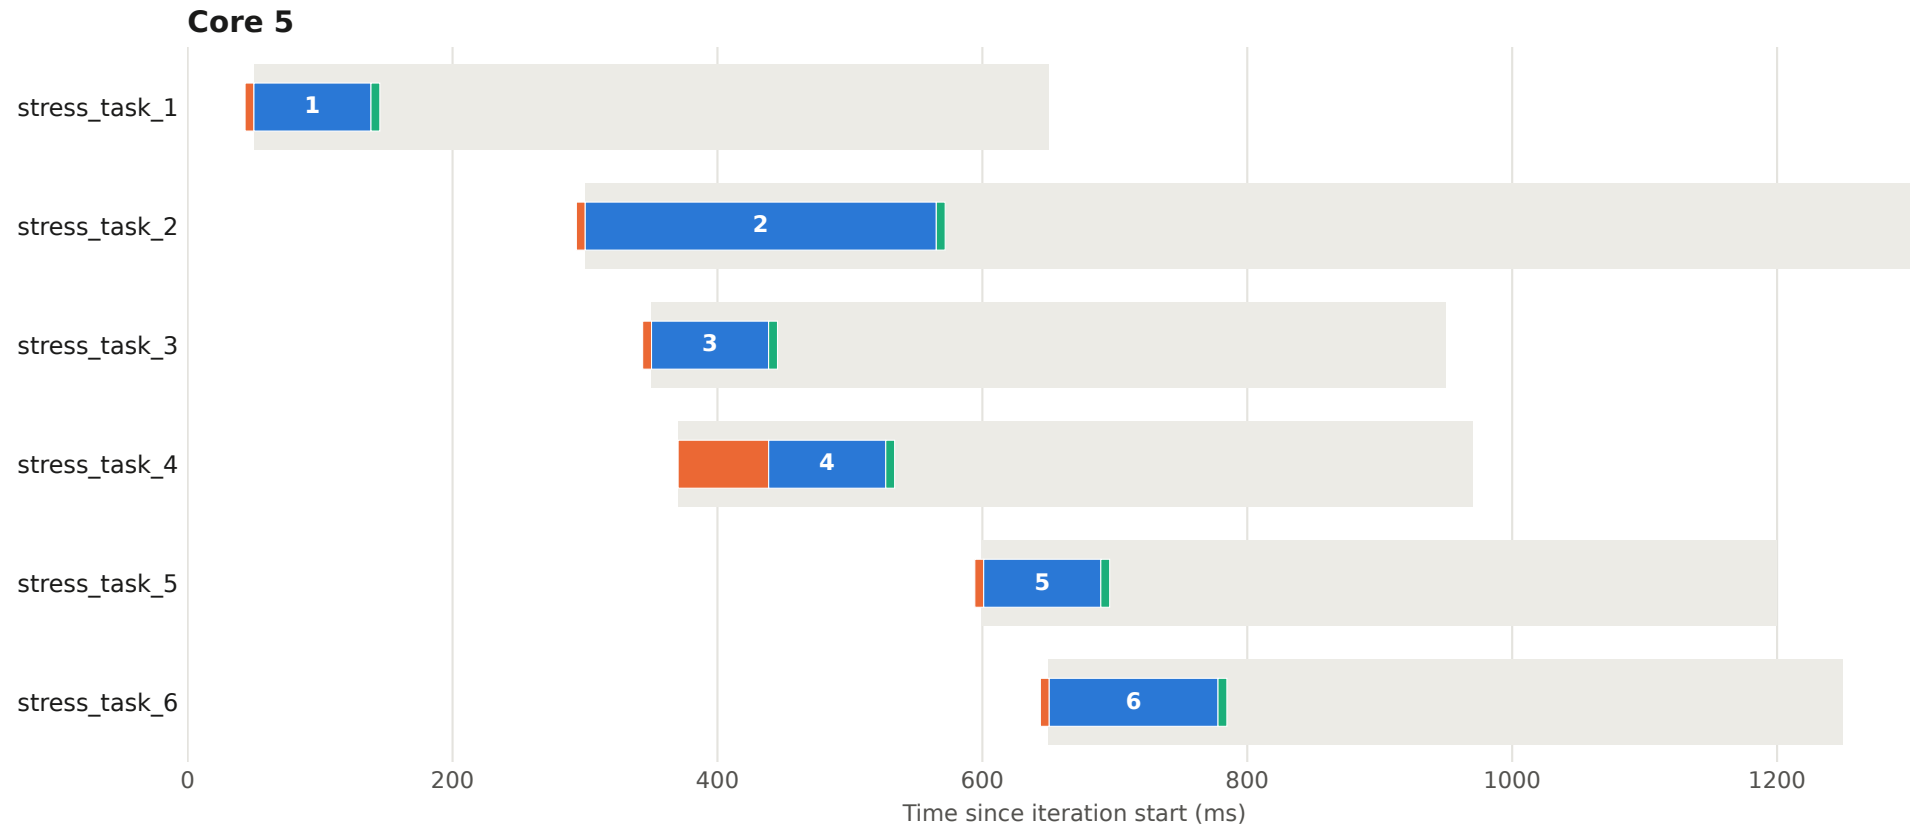


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 13 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

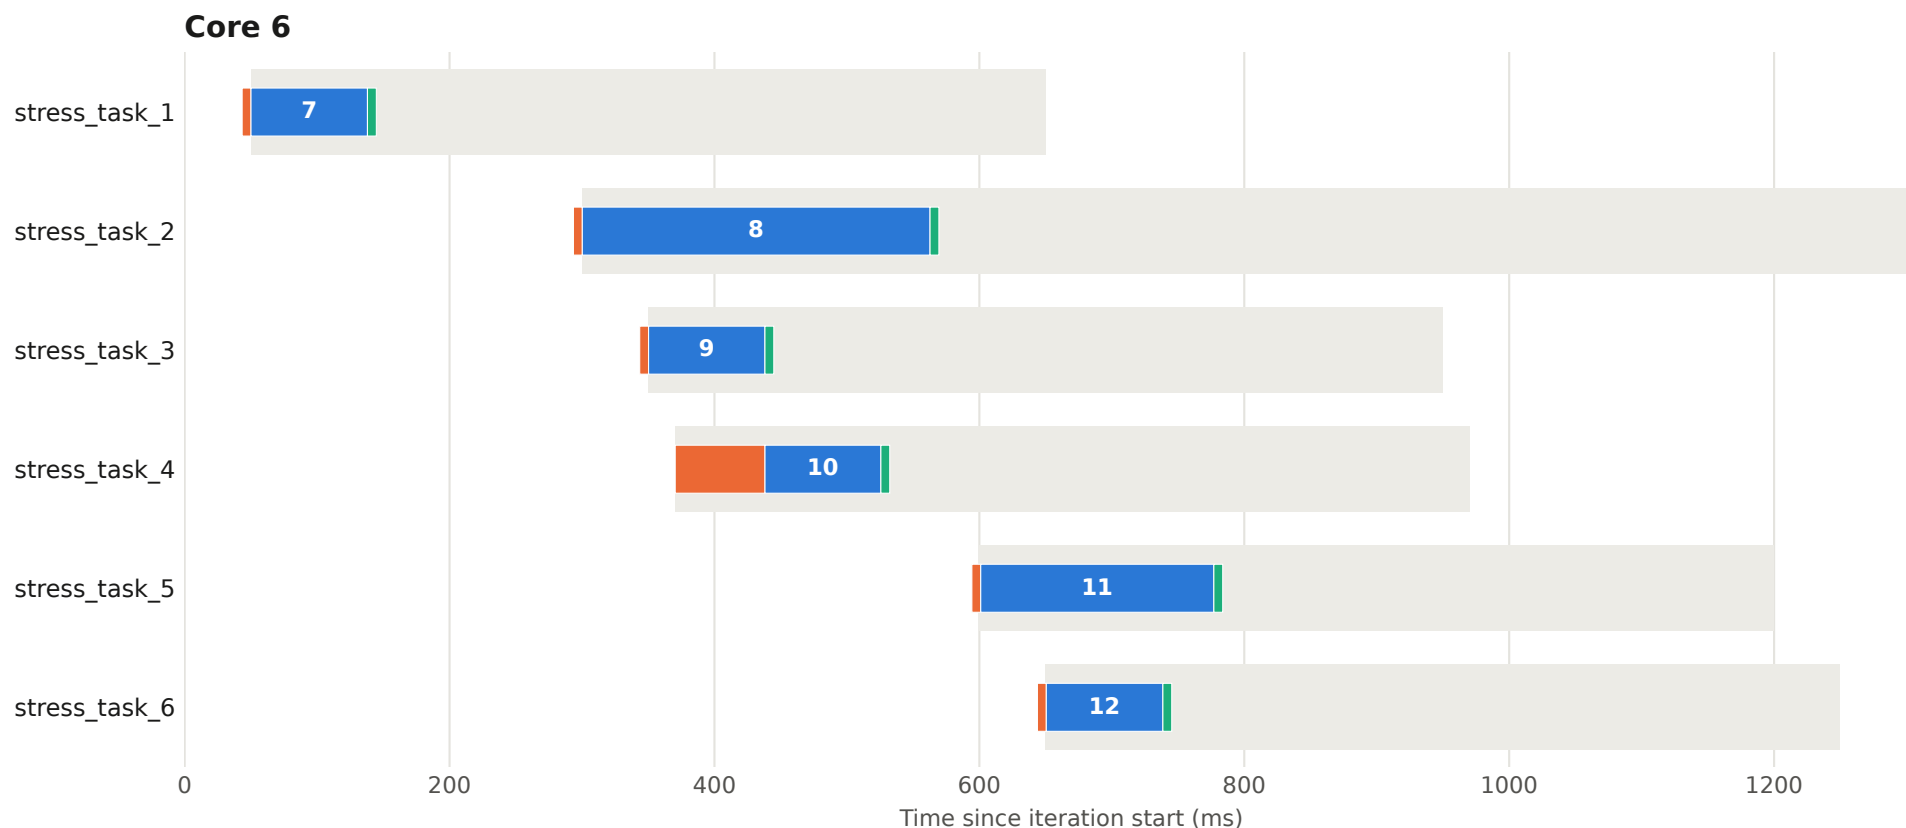


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 14 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

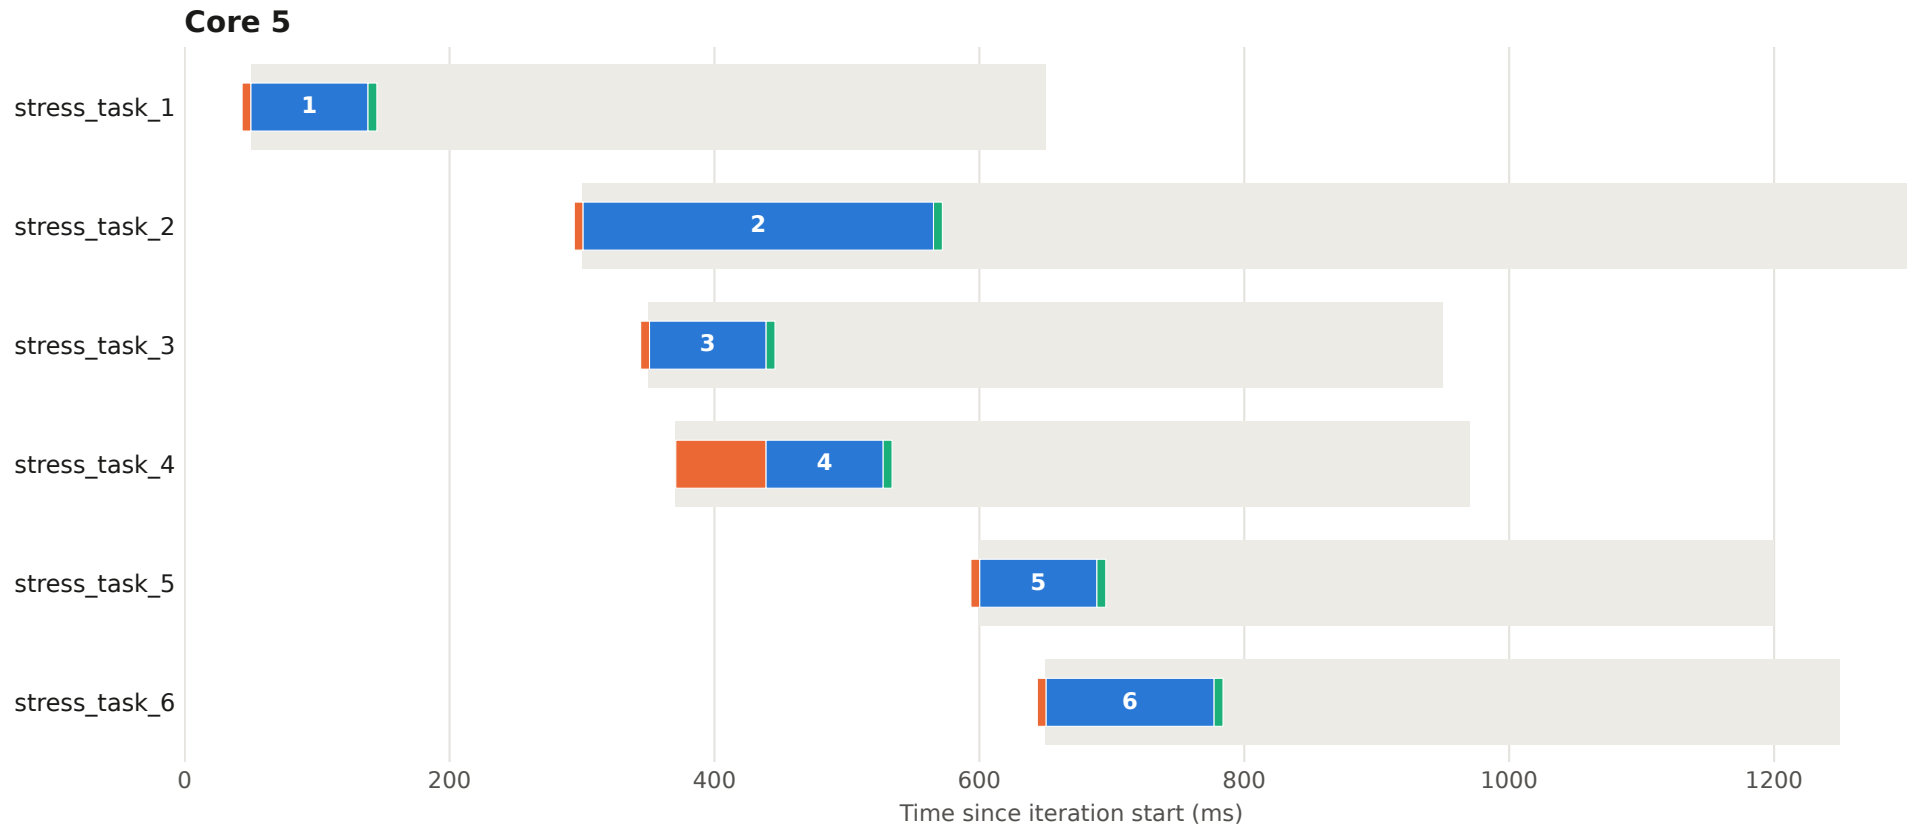


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 14 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

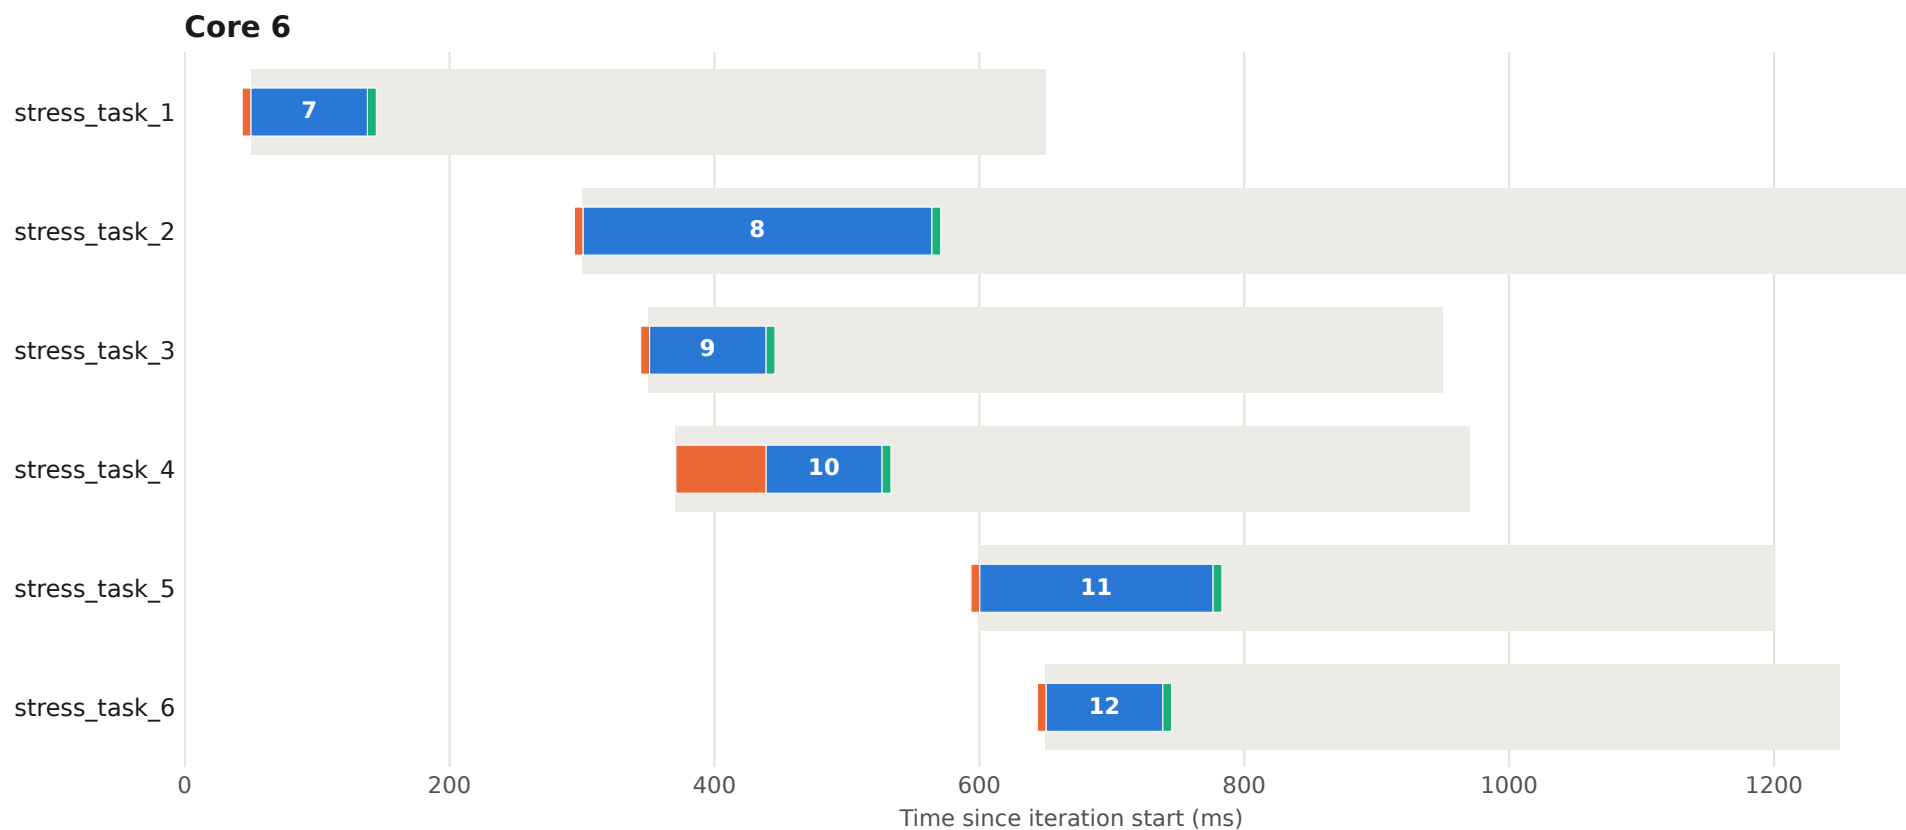


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 15 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

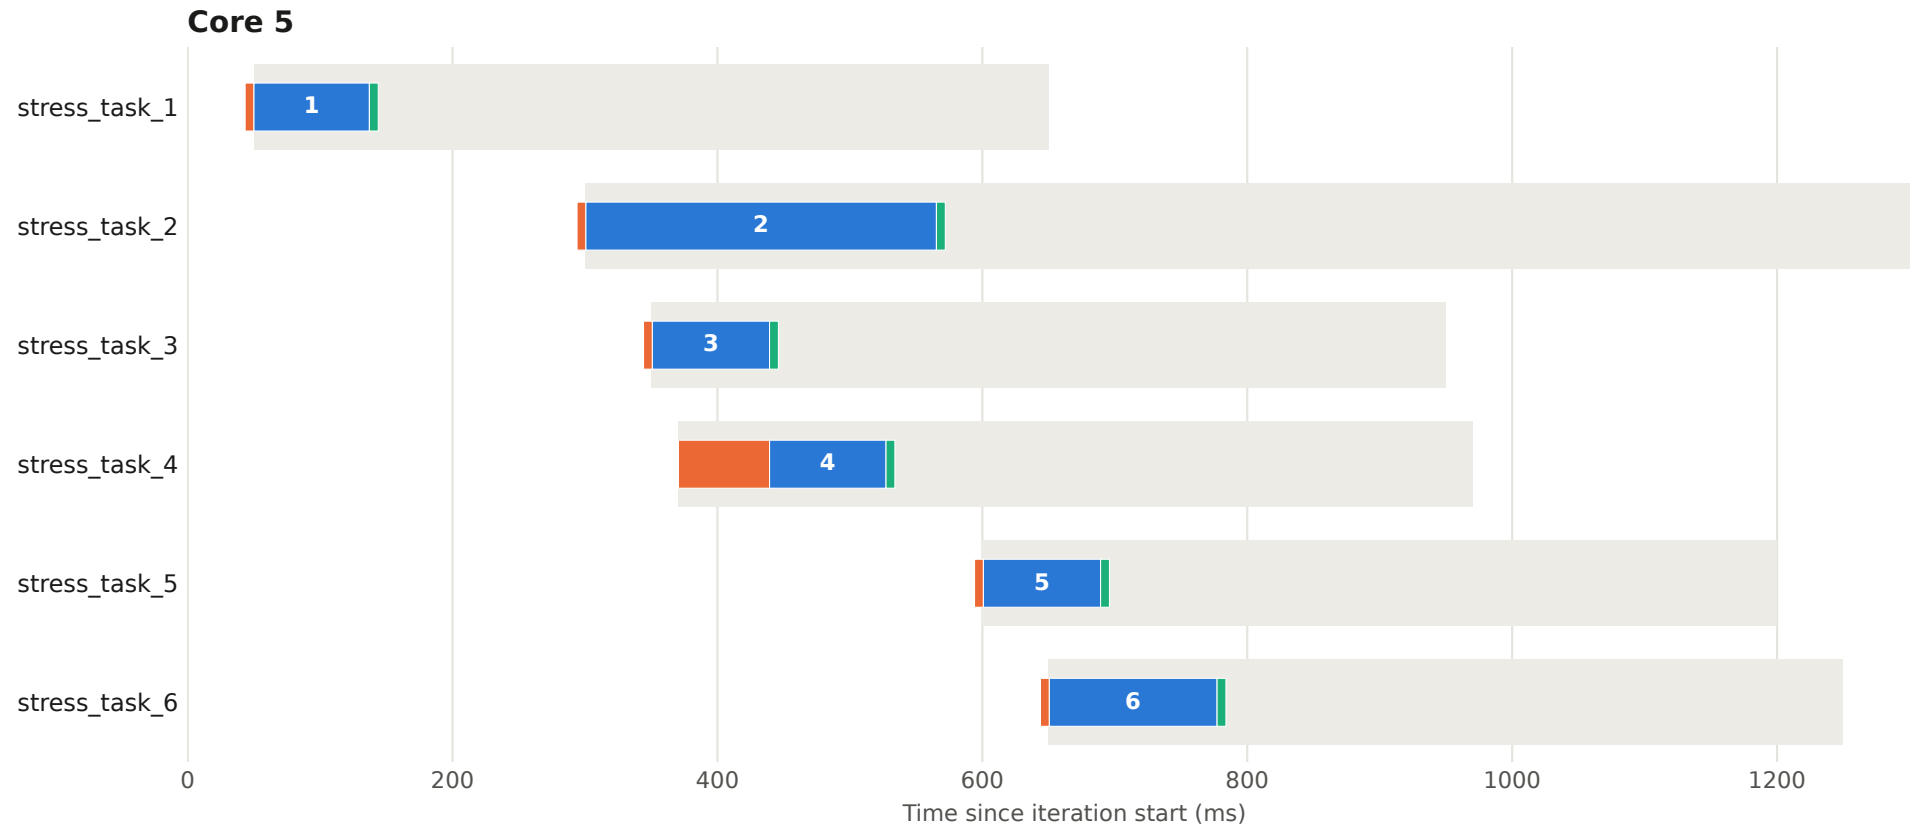


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 15 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

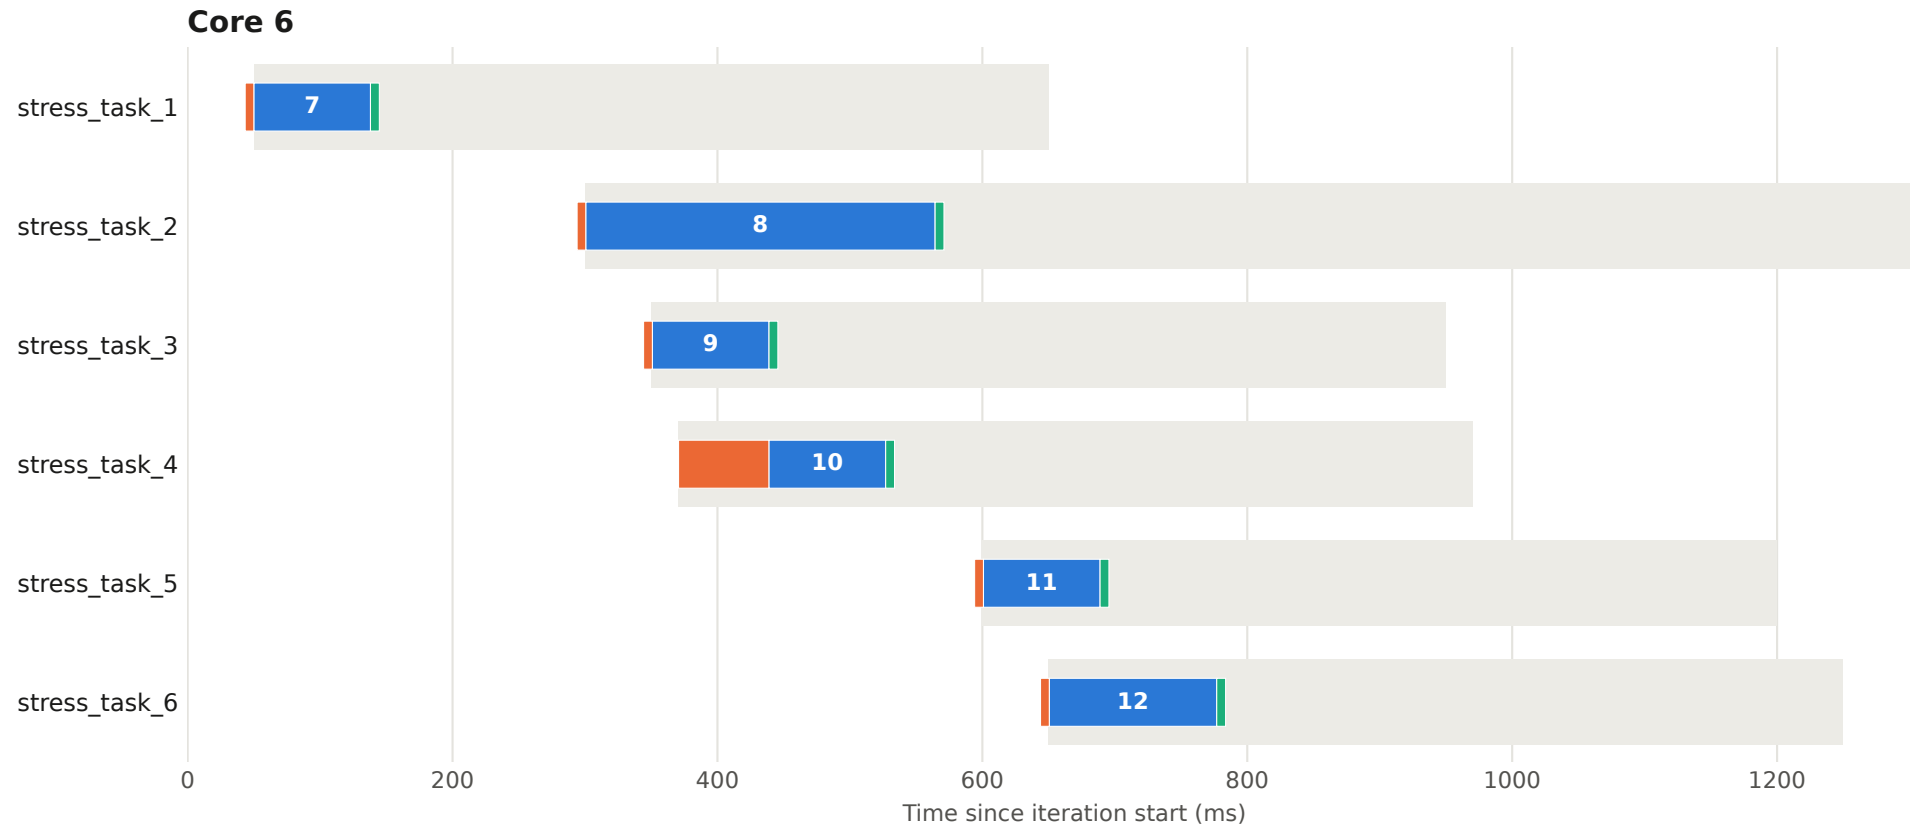


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 16 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

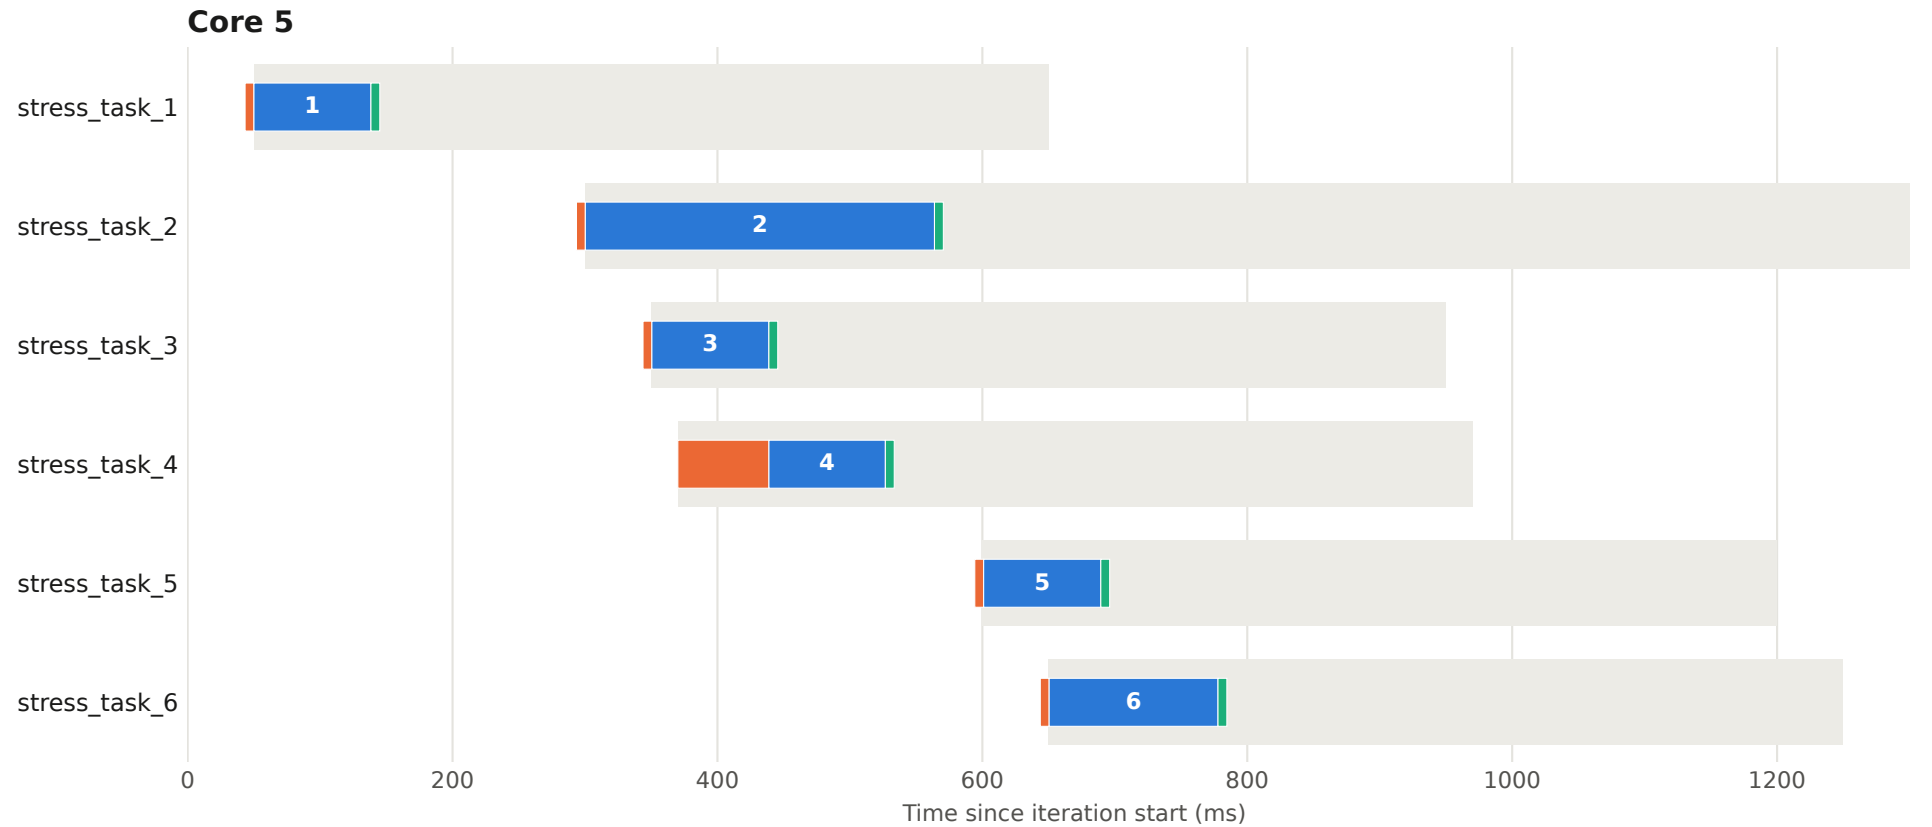


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 16 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

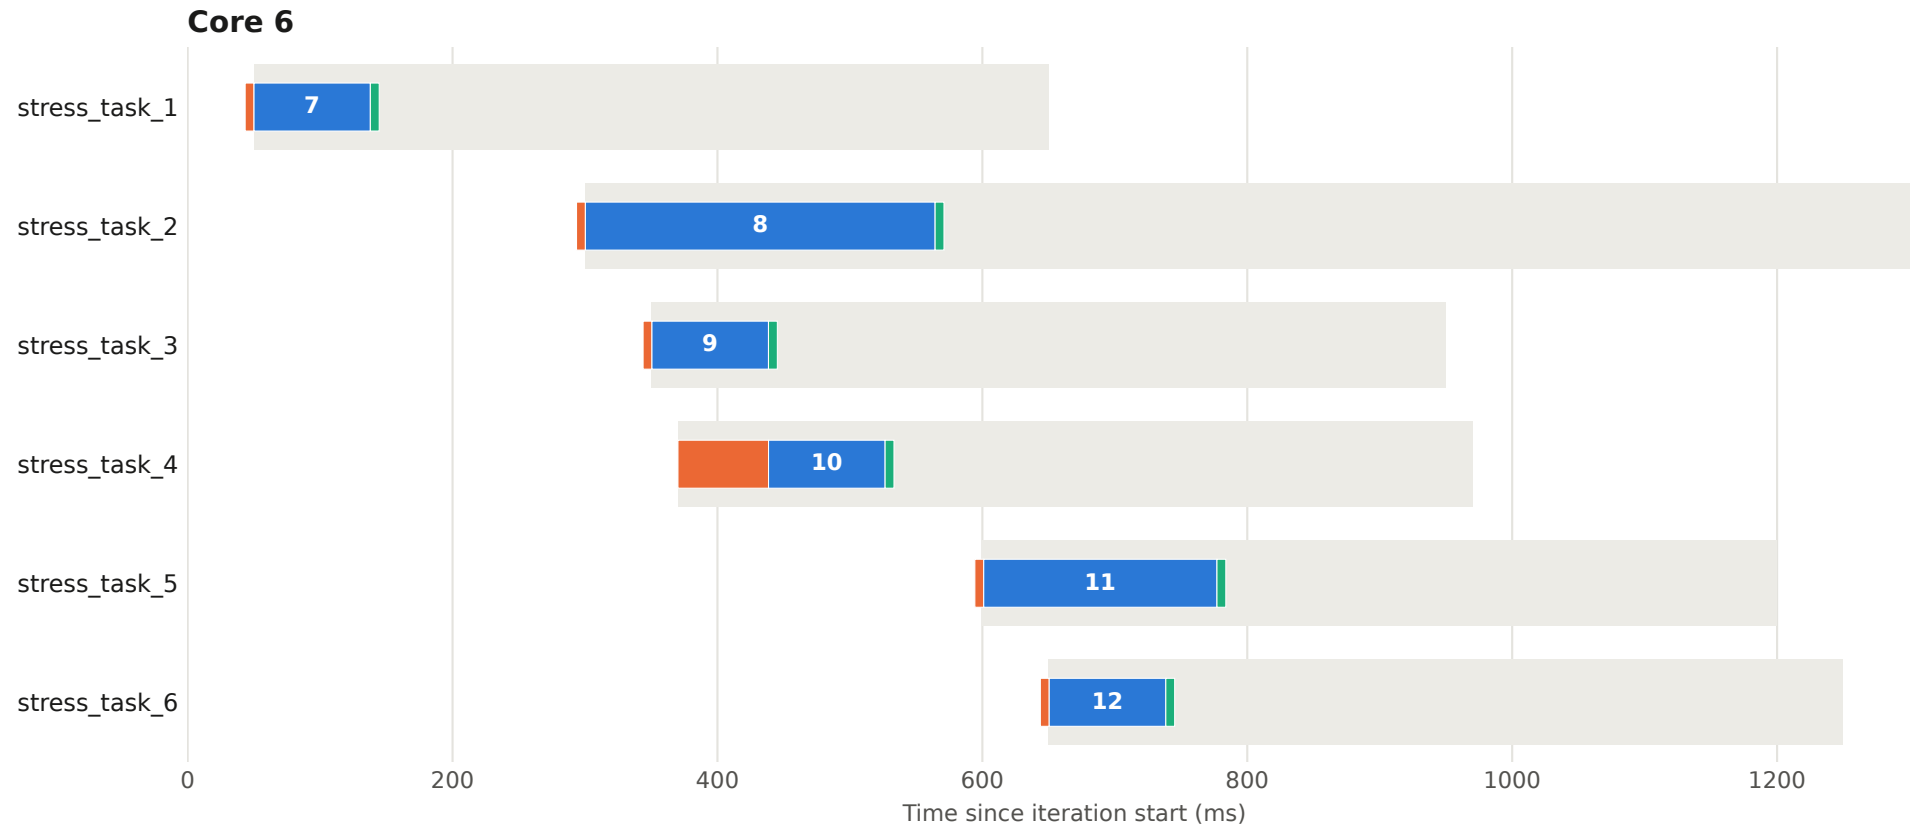


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 17 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

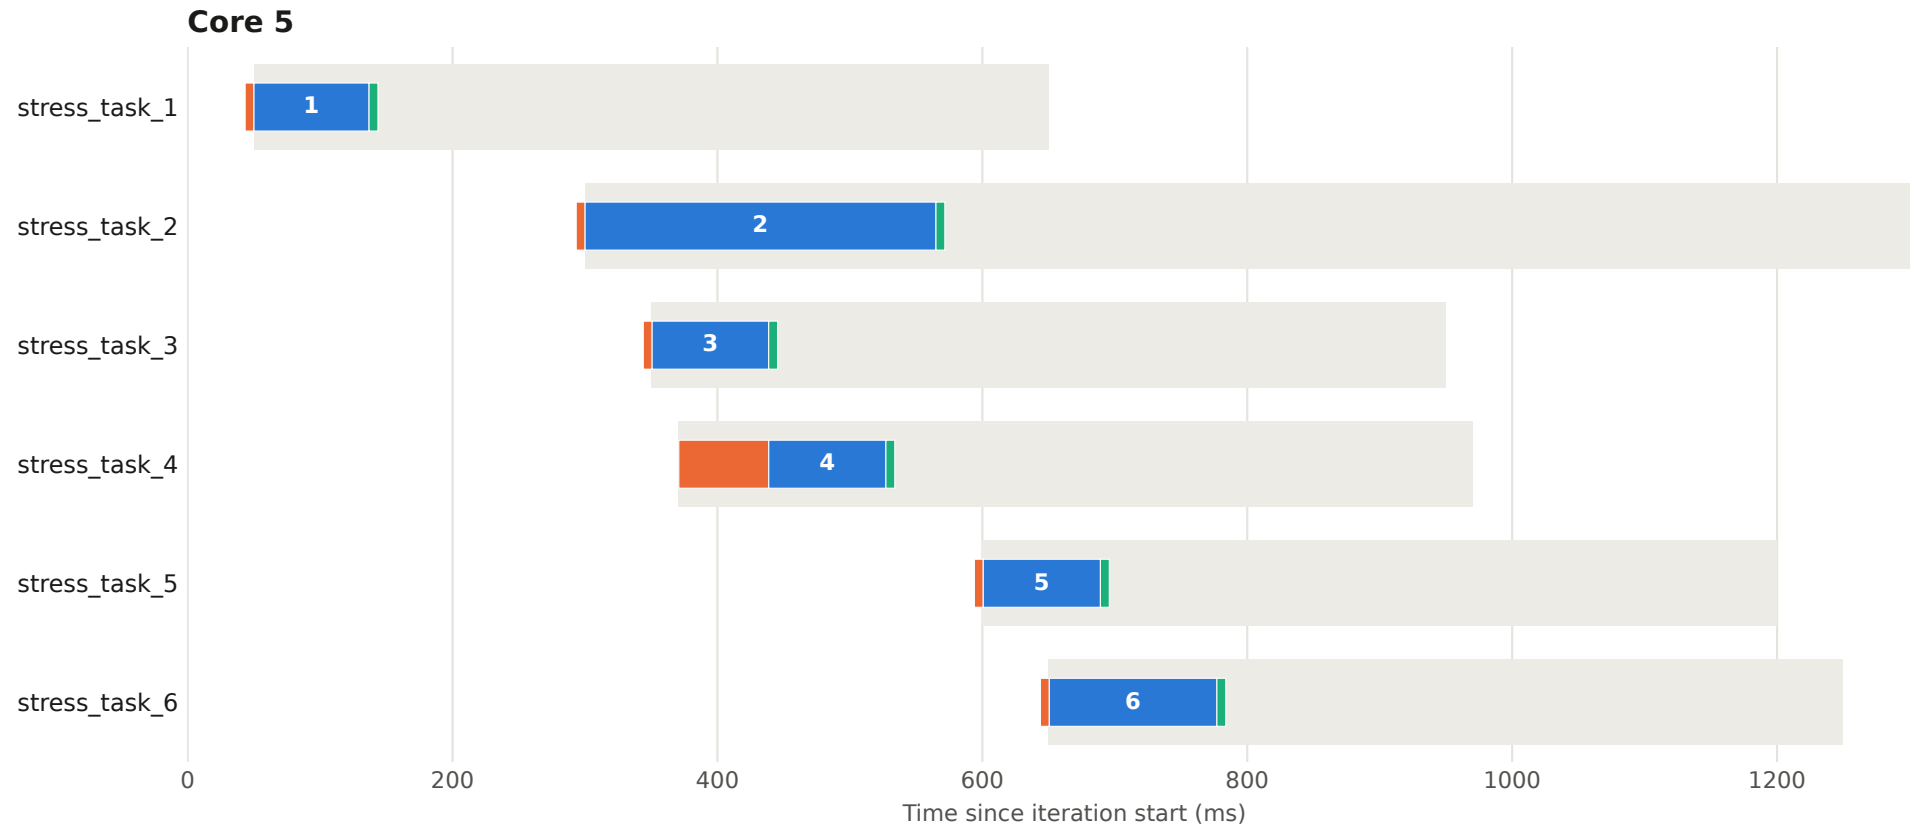


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 17 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

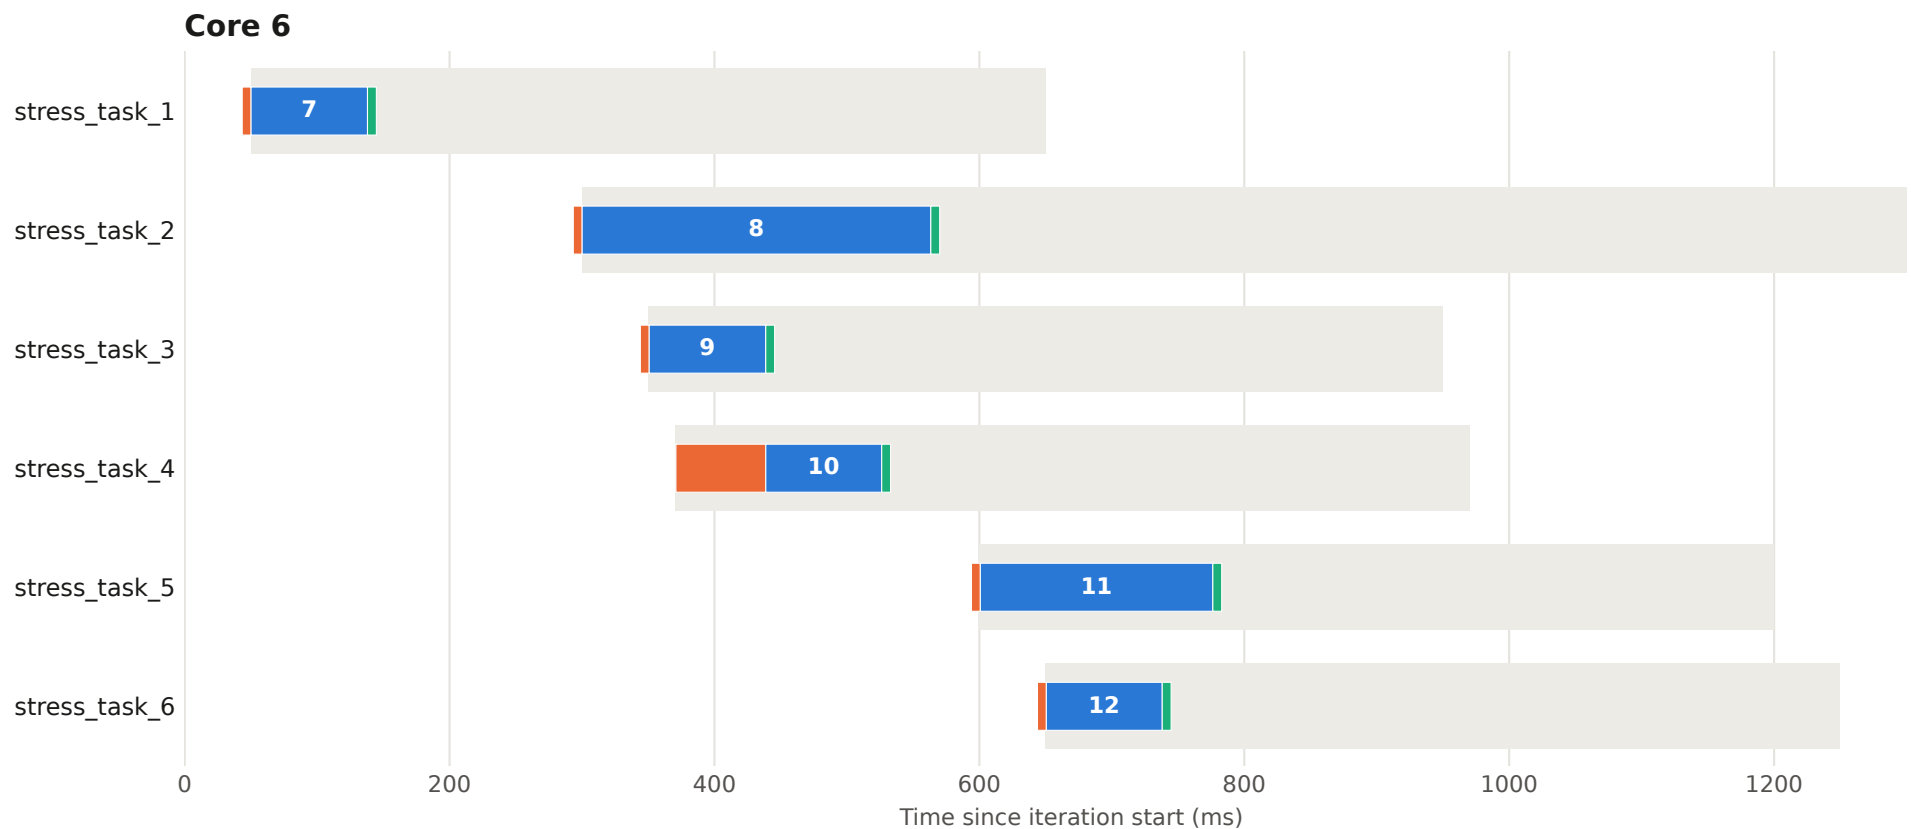


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 18 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

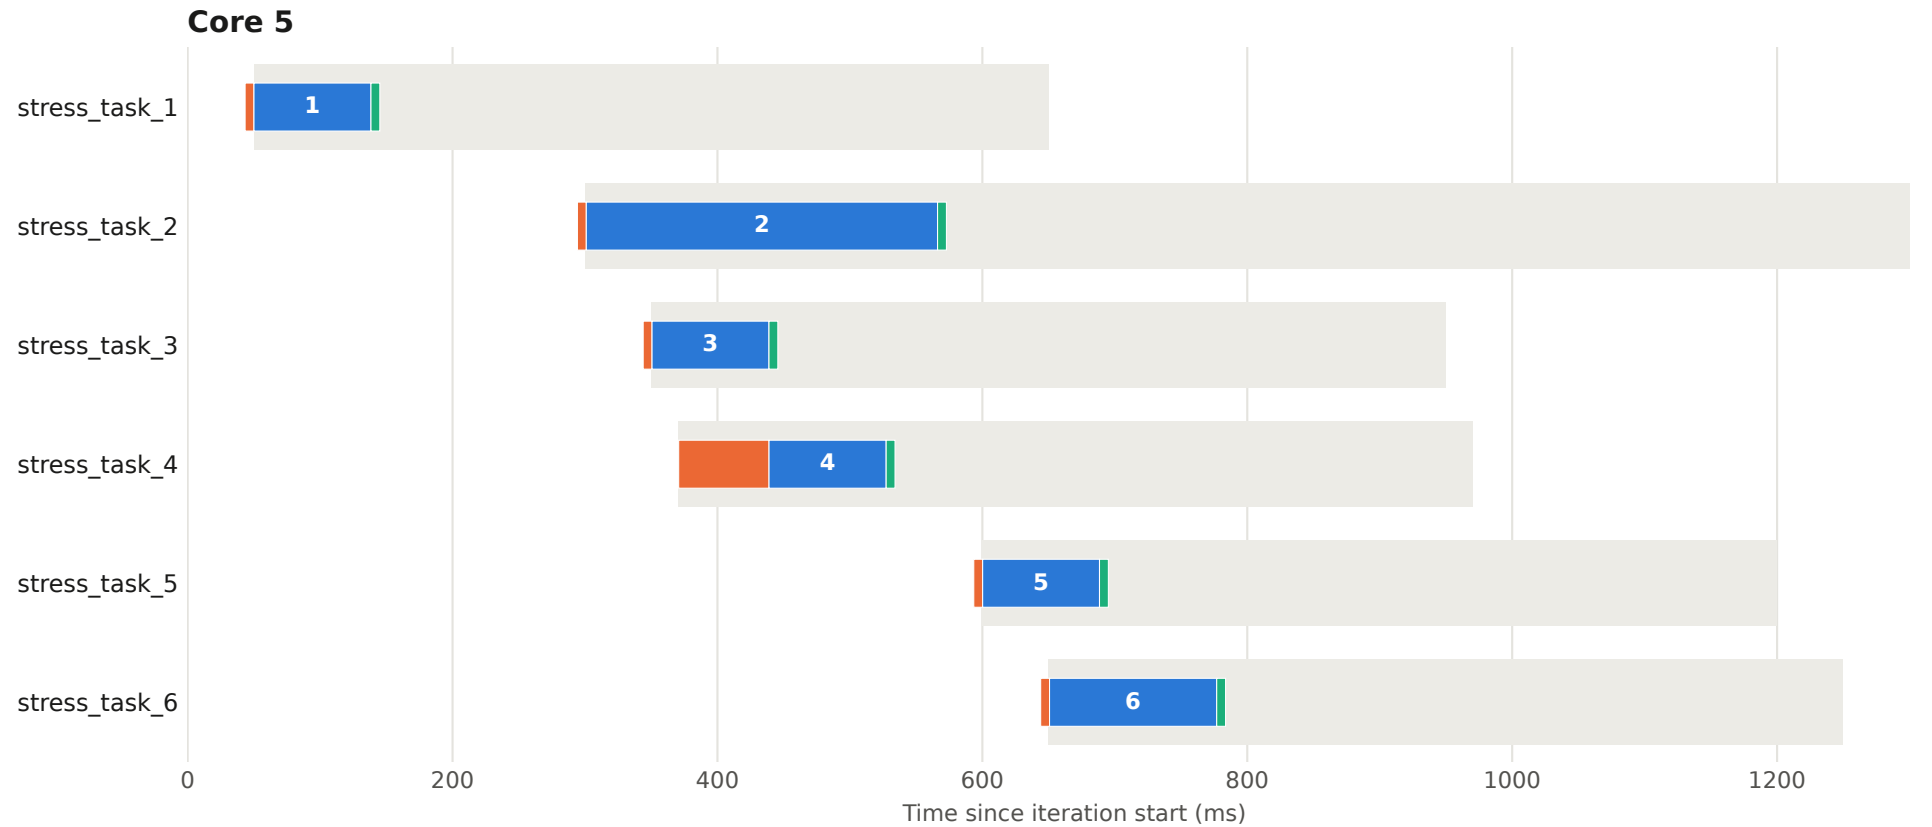


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 18 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

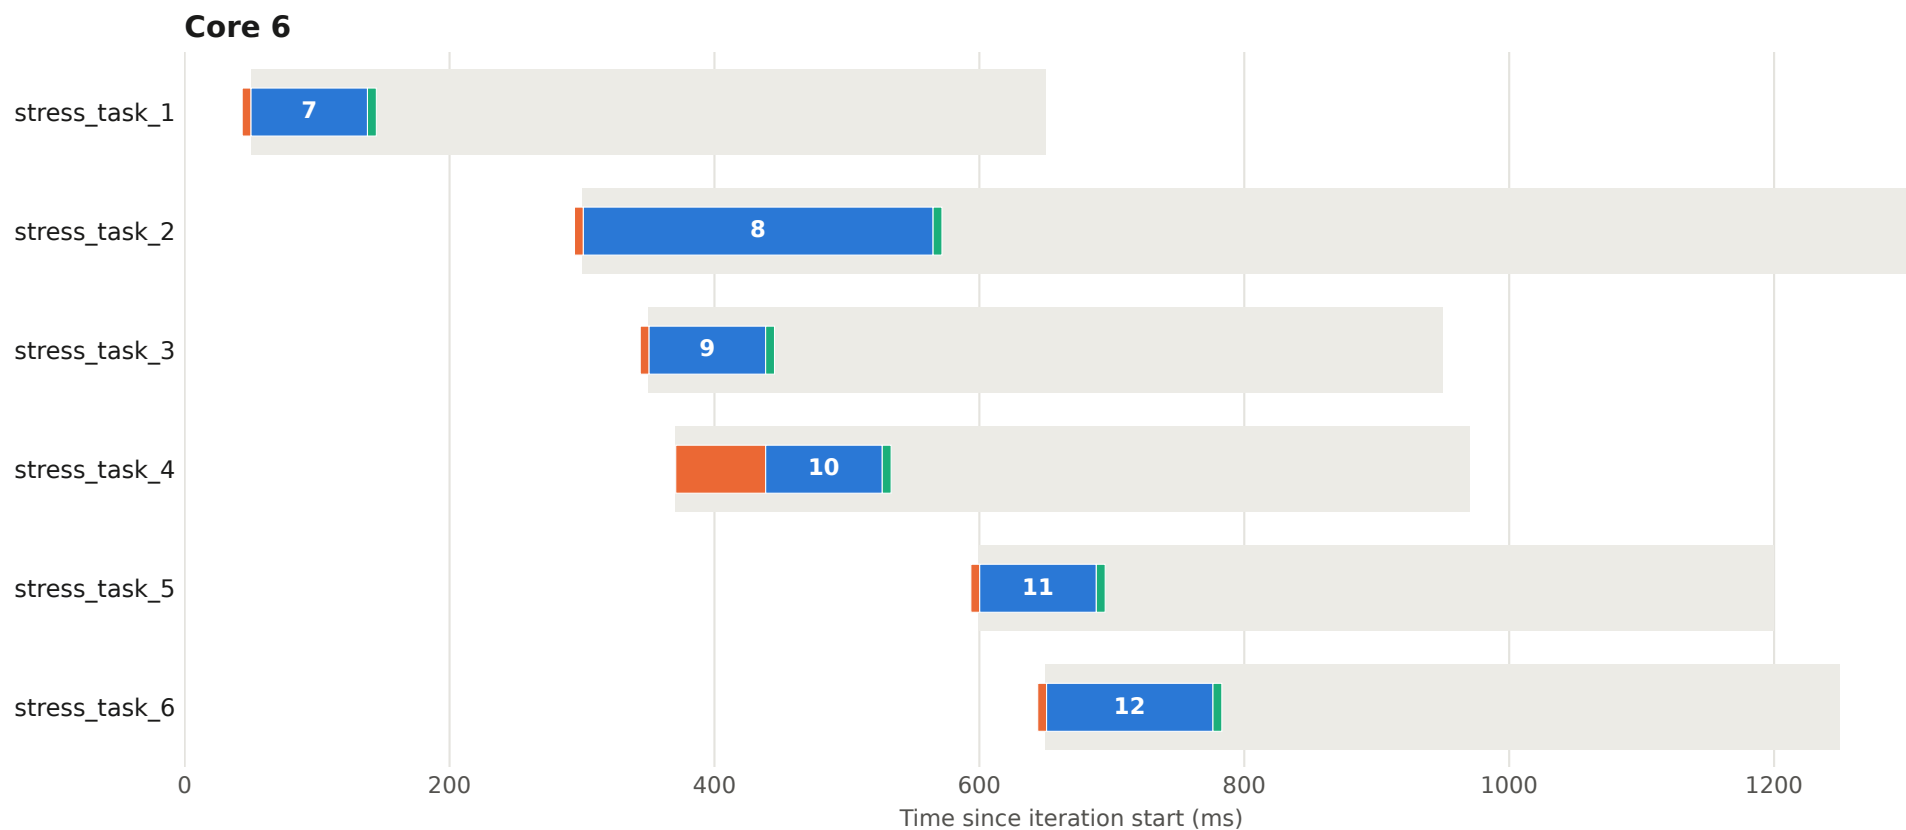


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 19 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

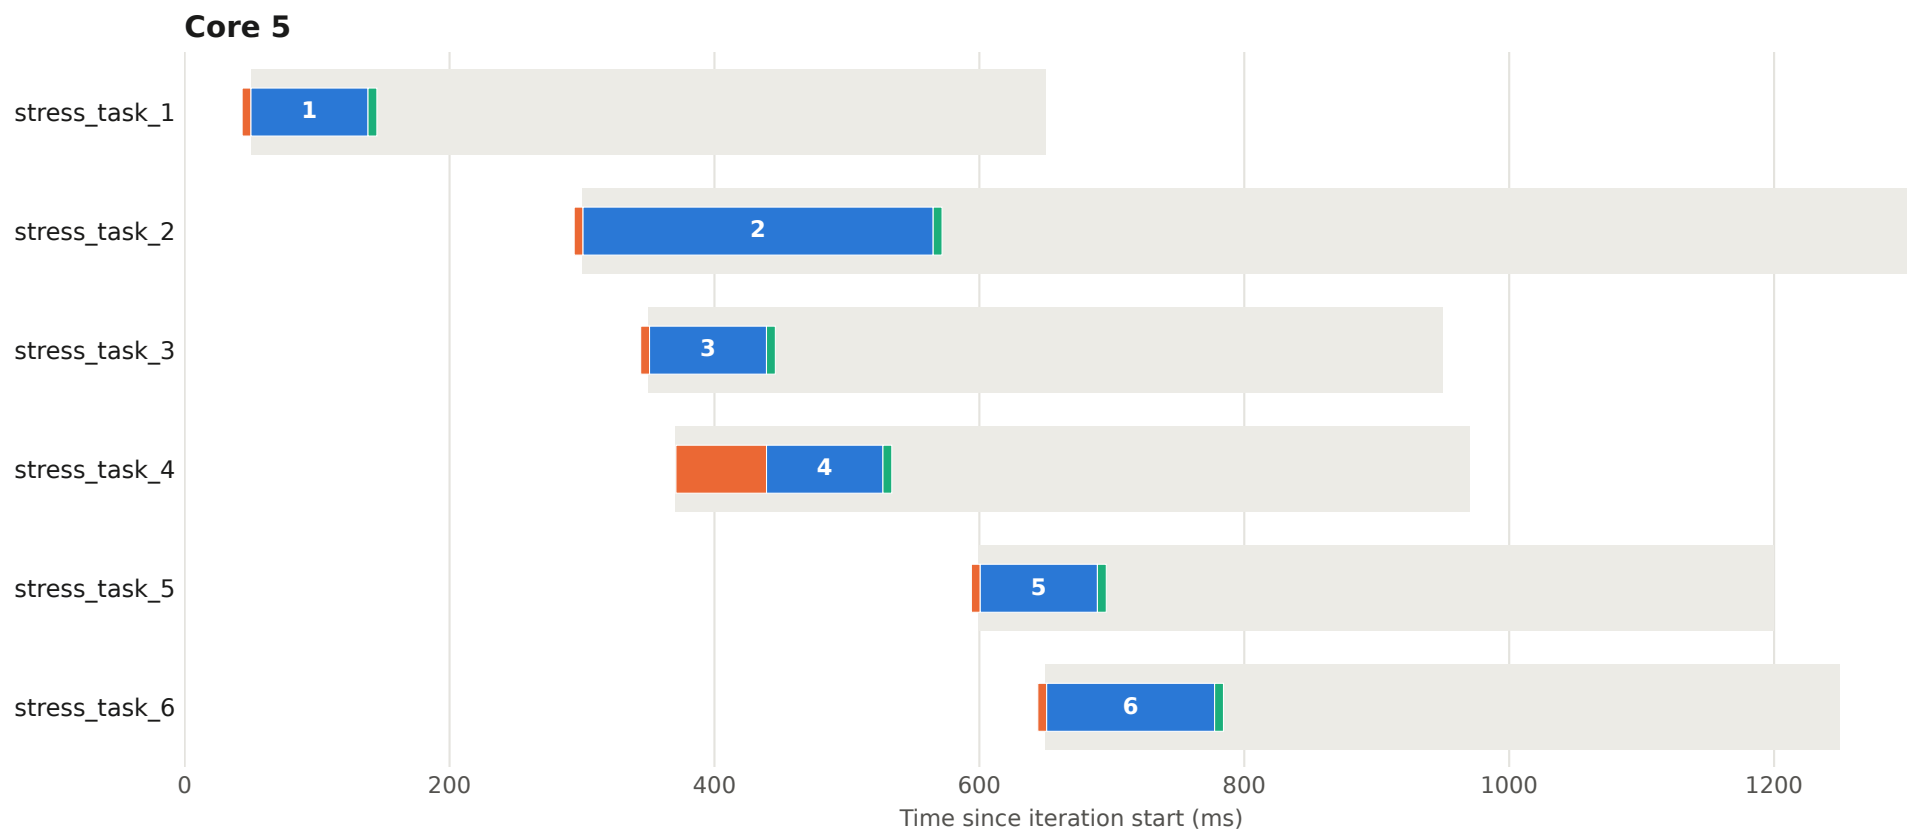


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 19 - core 6

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

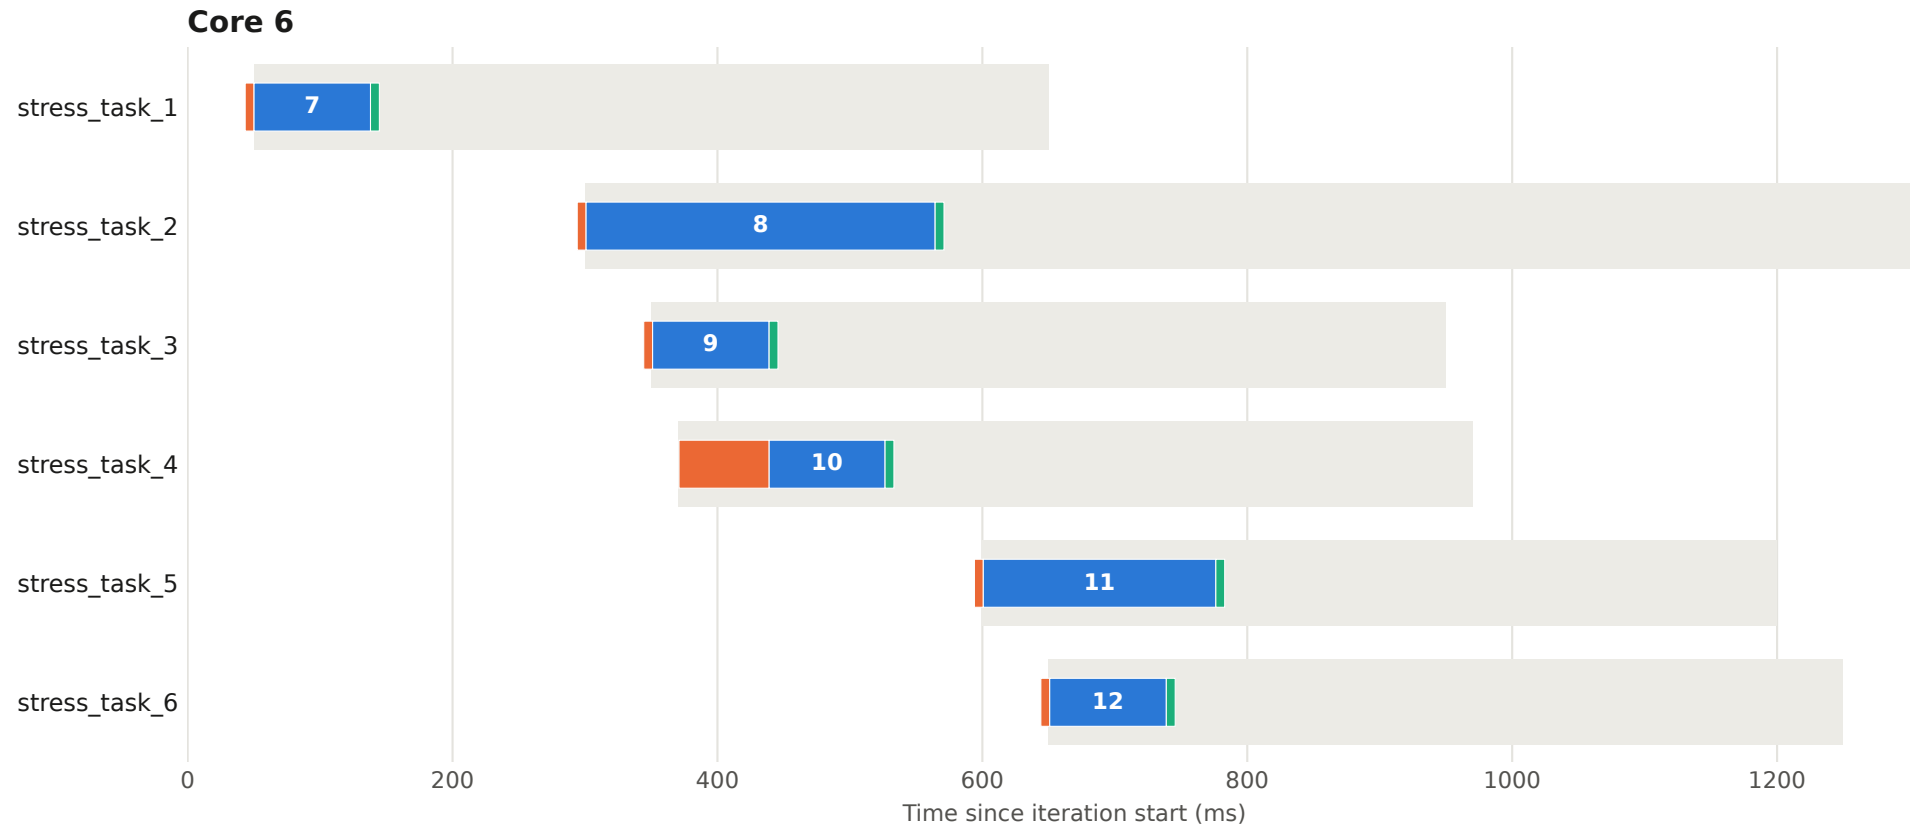

Execution plan - iteration 20 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

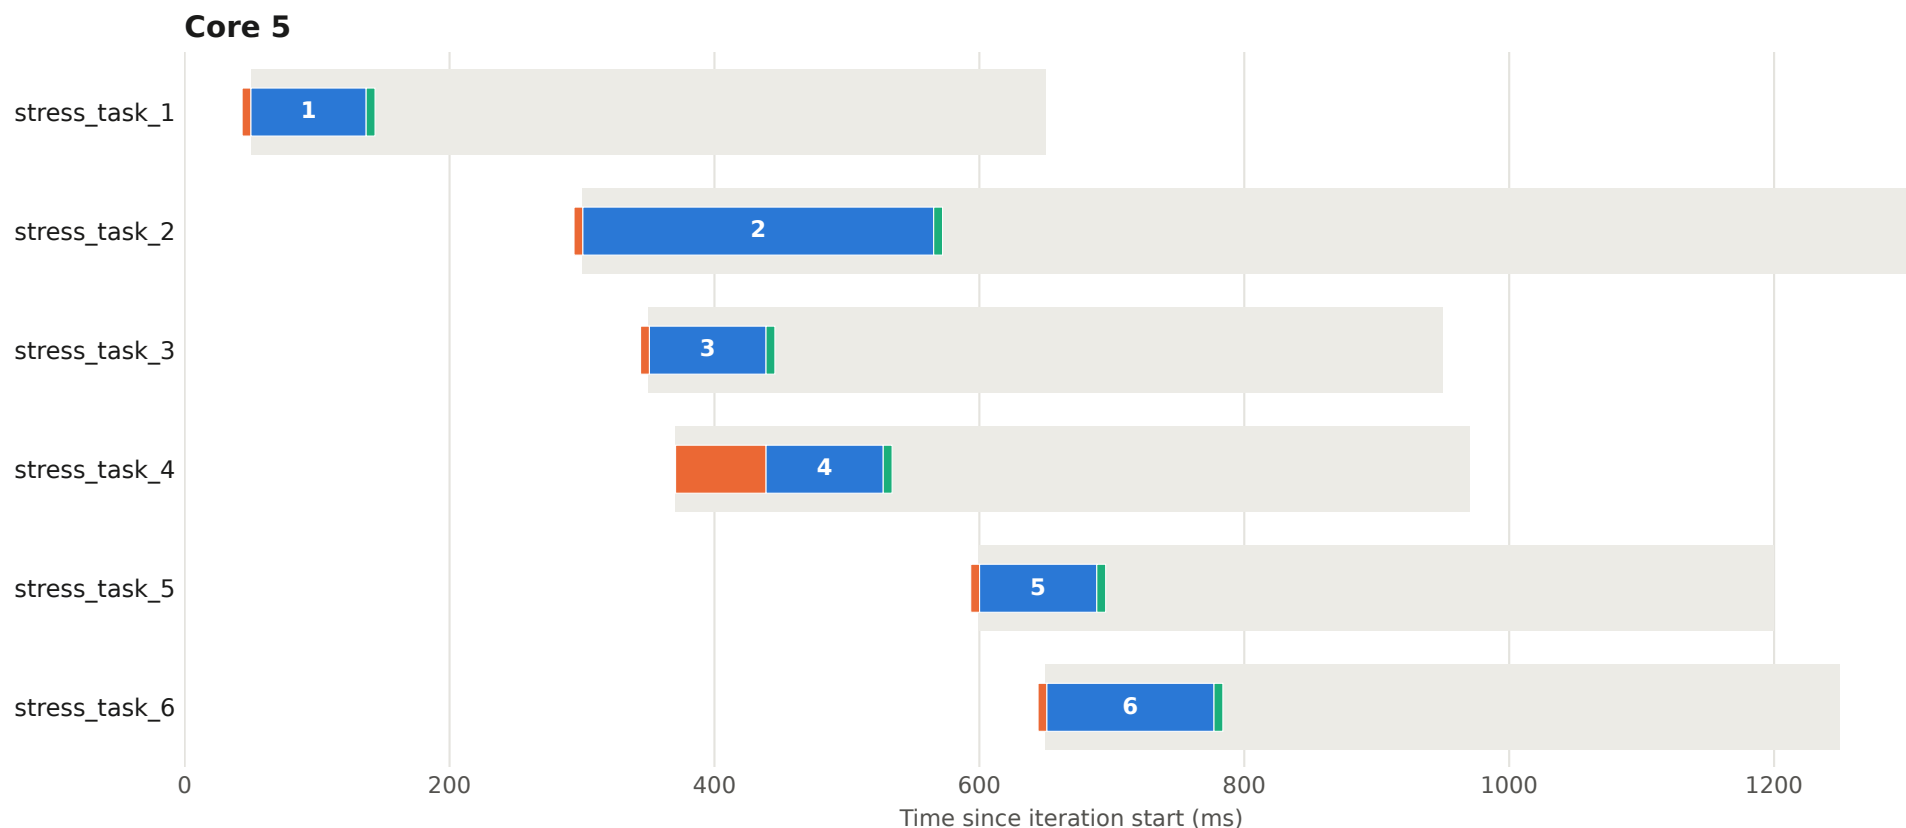


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 20 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

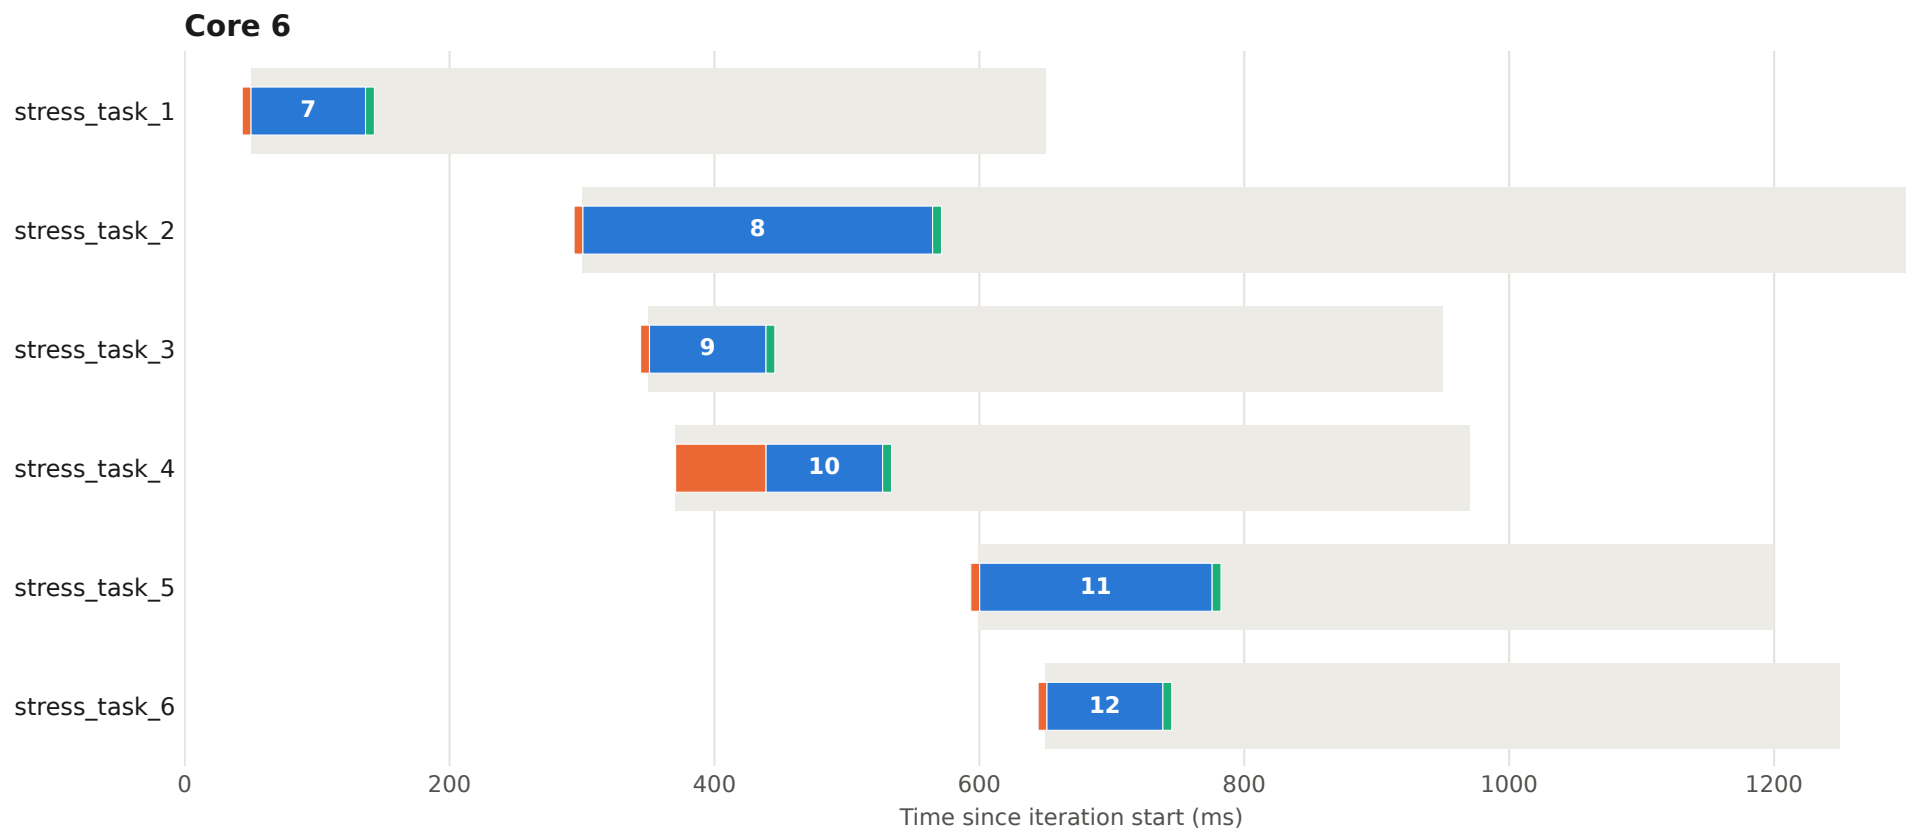


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 21 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

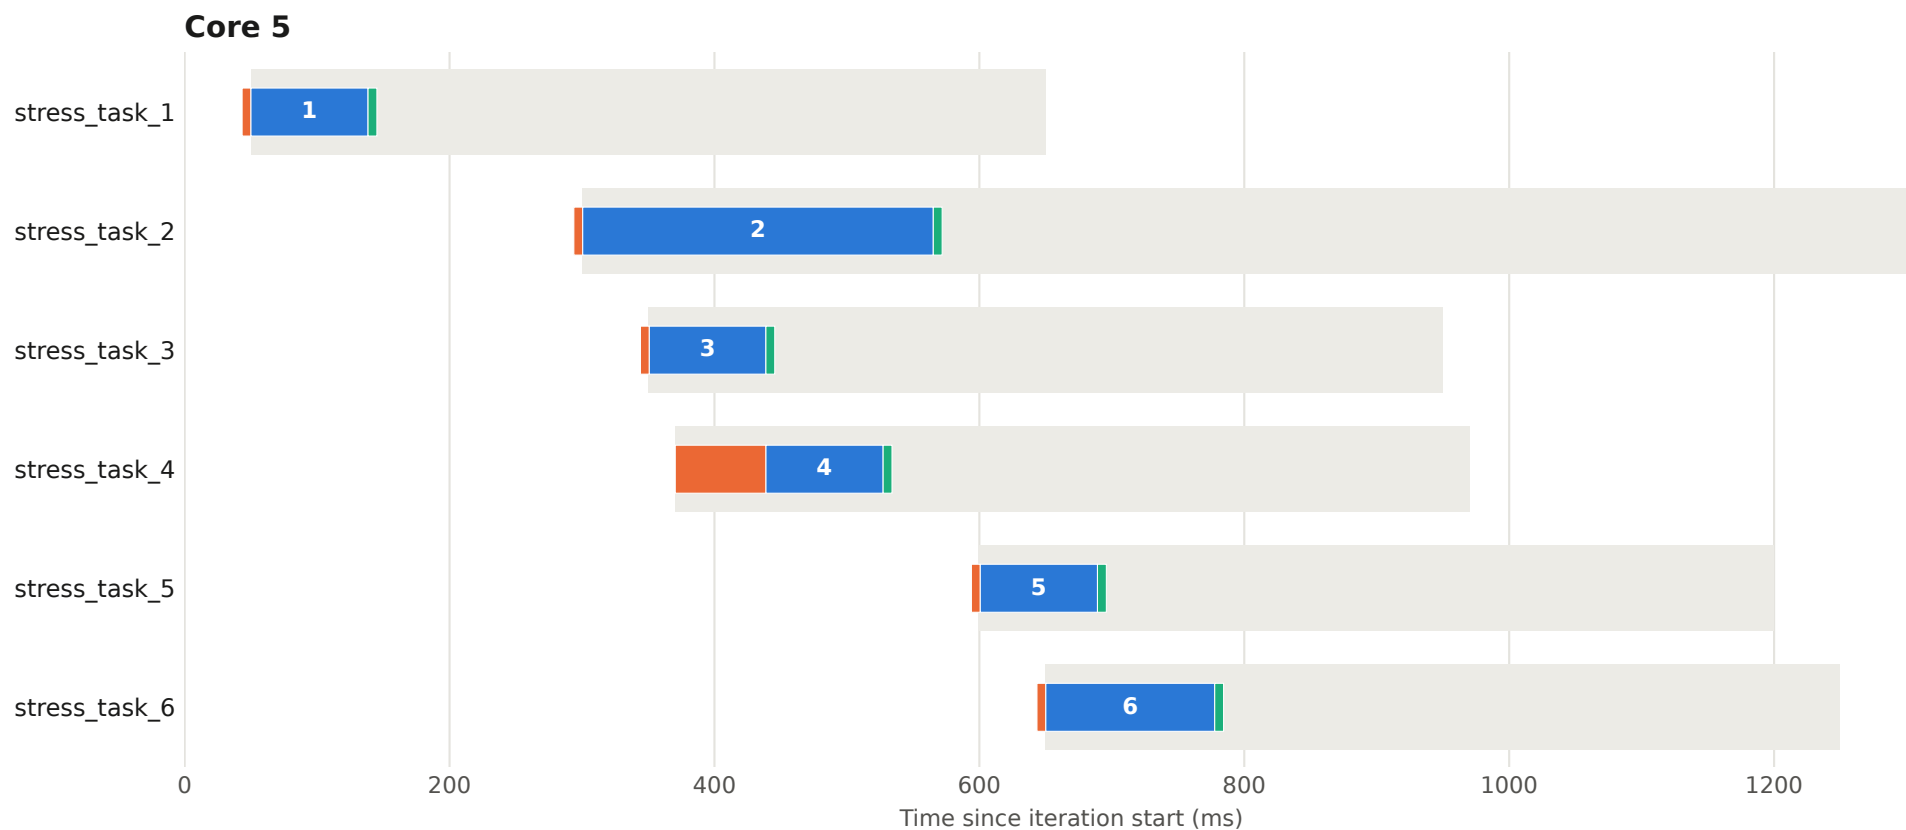


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 21 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

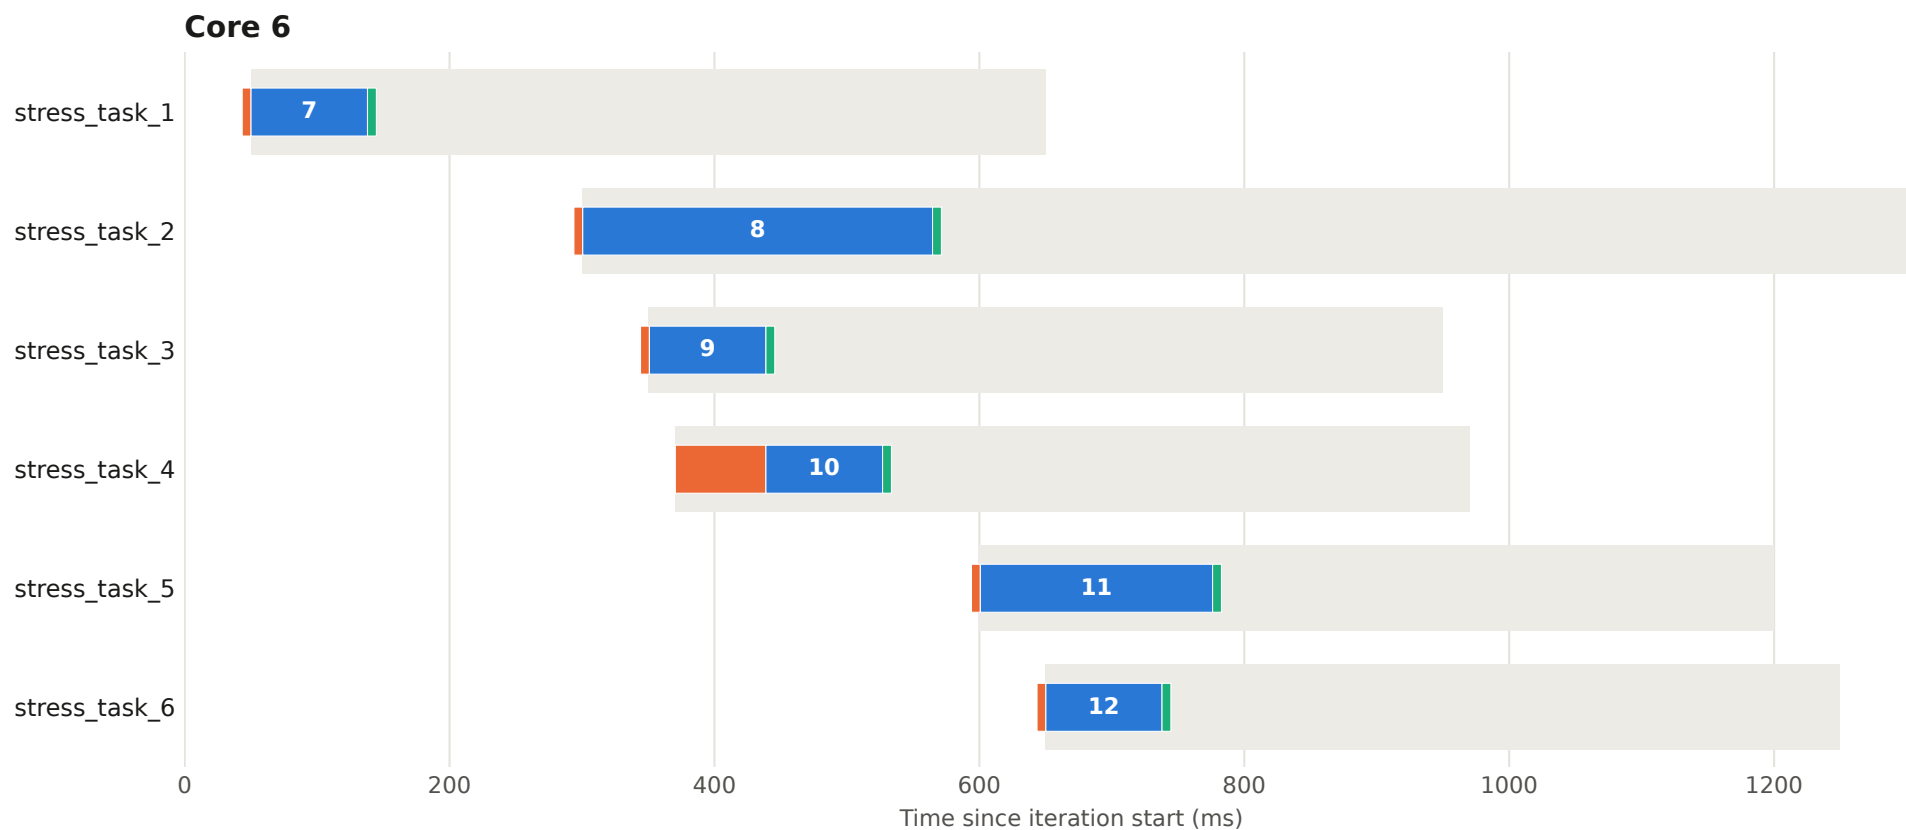


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 22 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

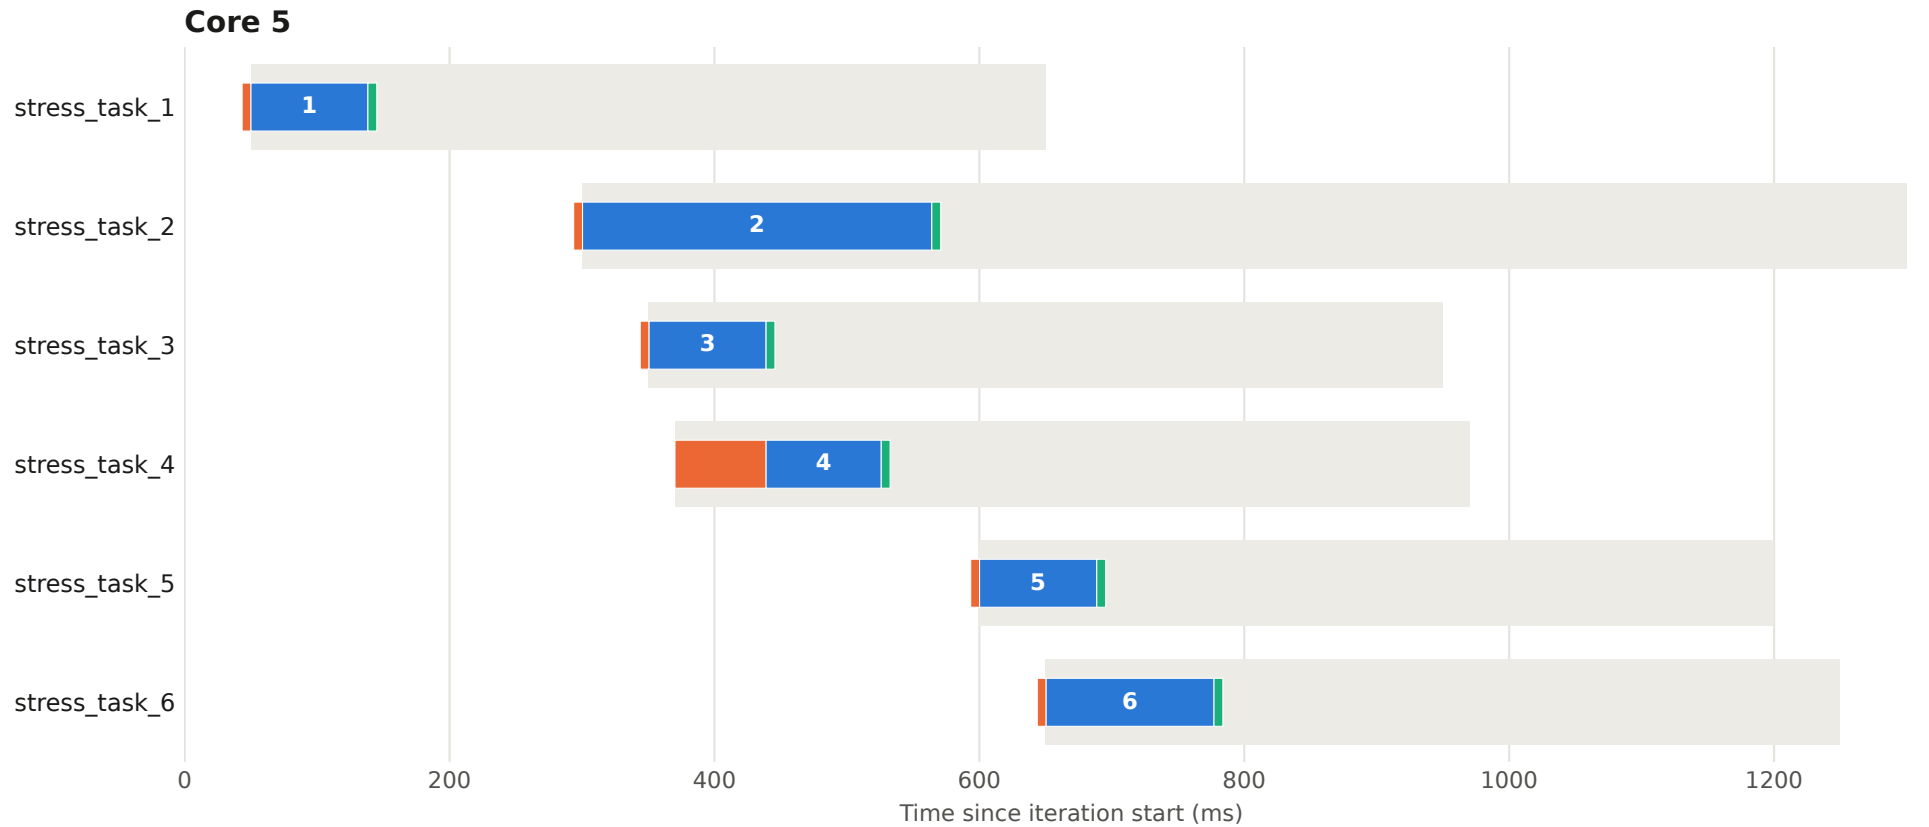


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 22 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

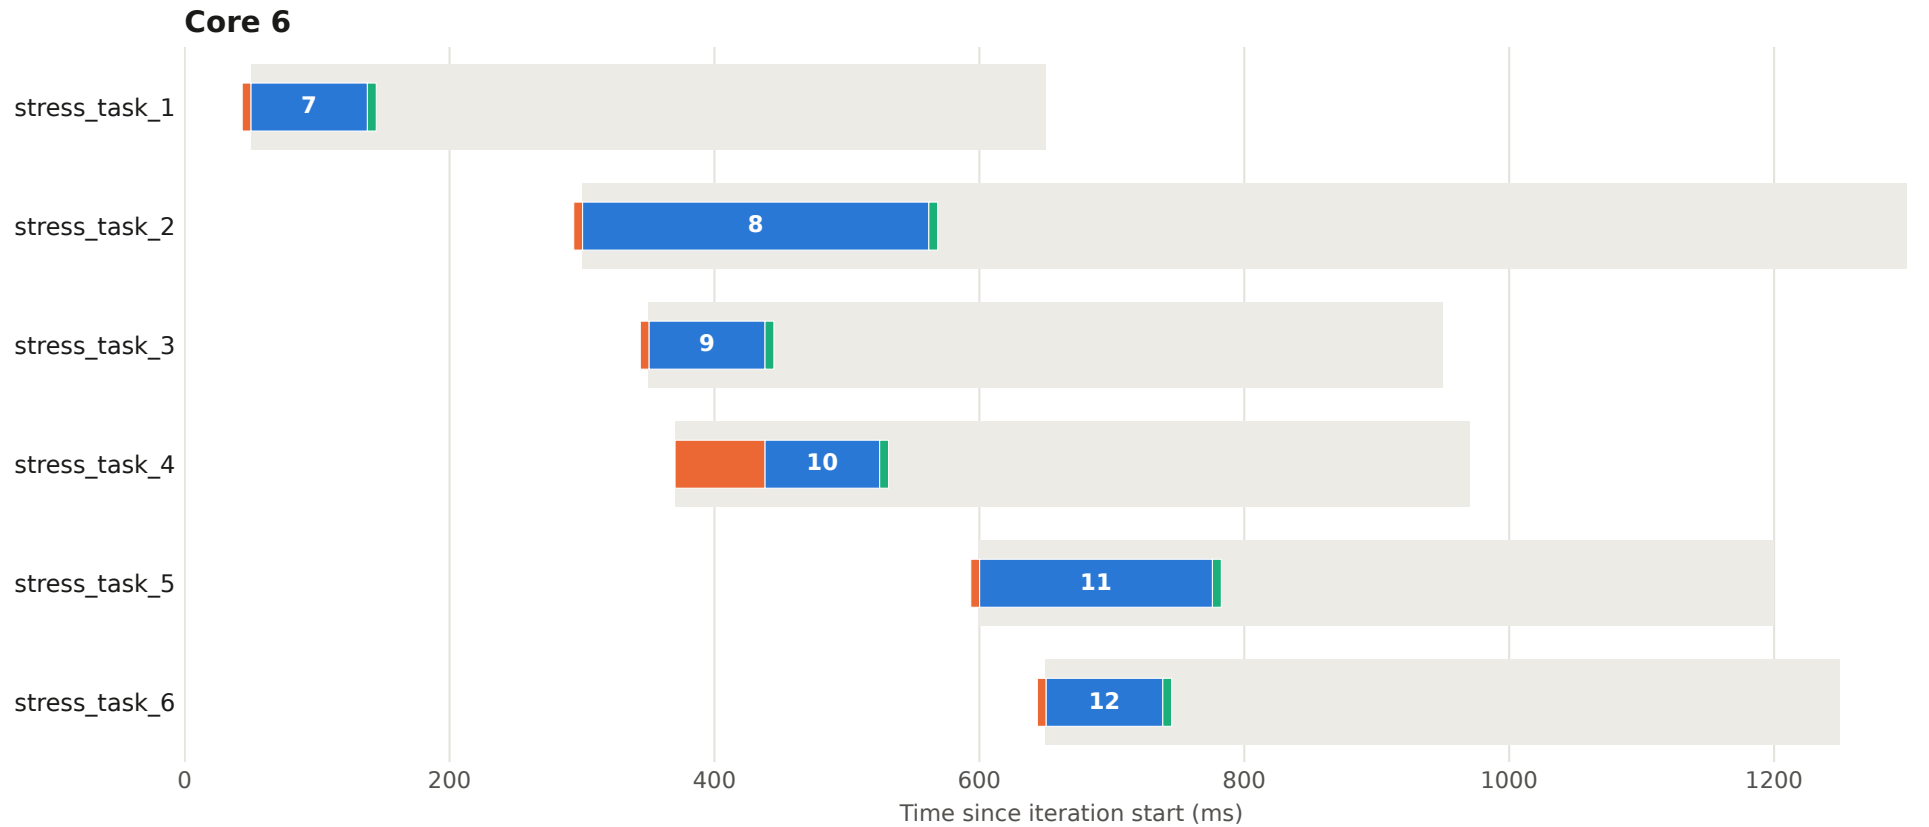


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 23 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

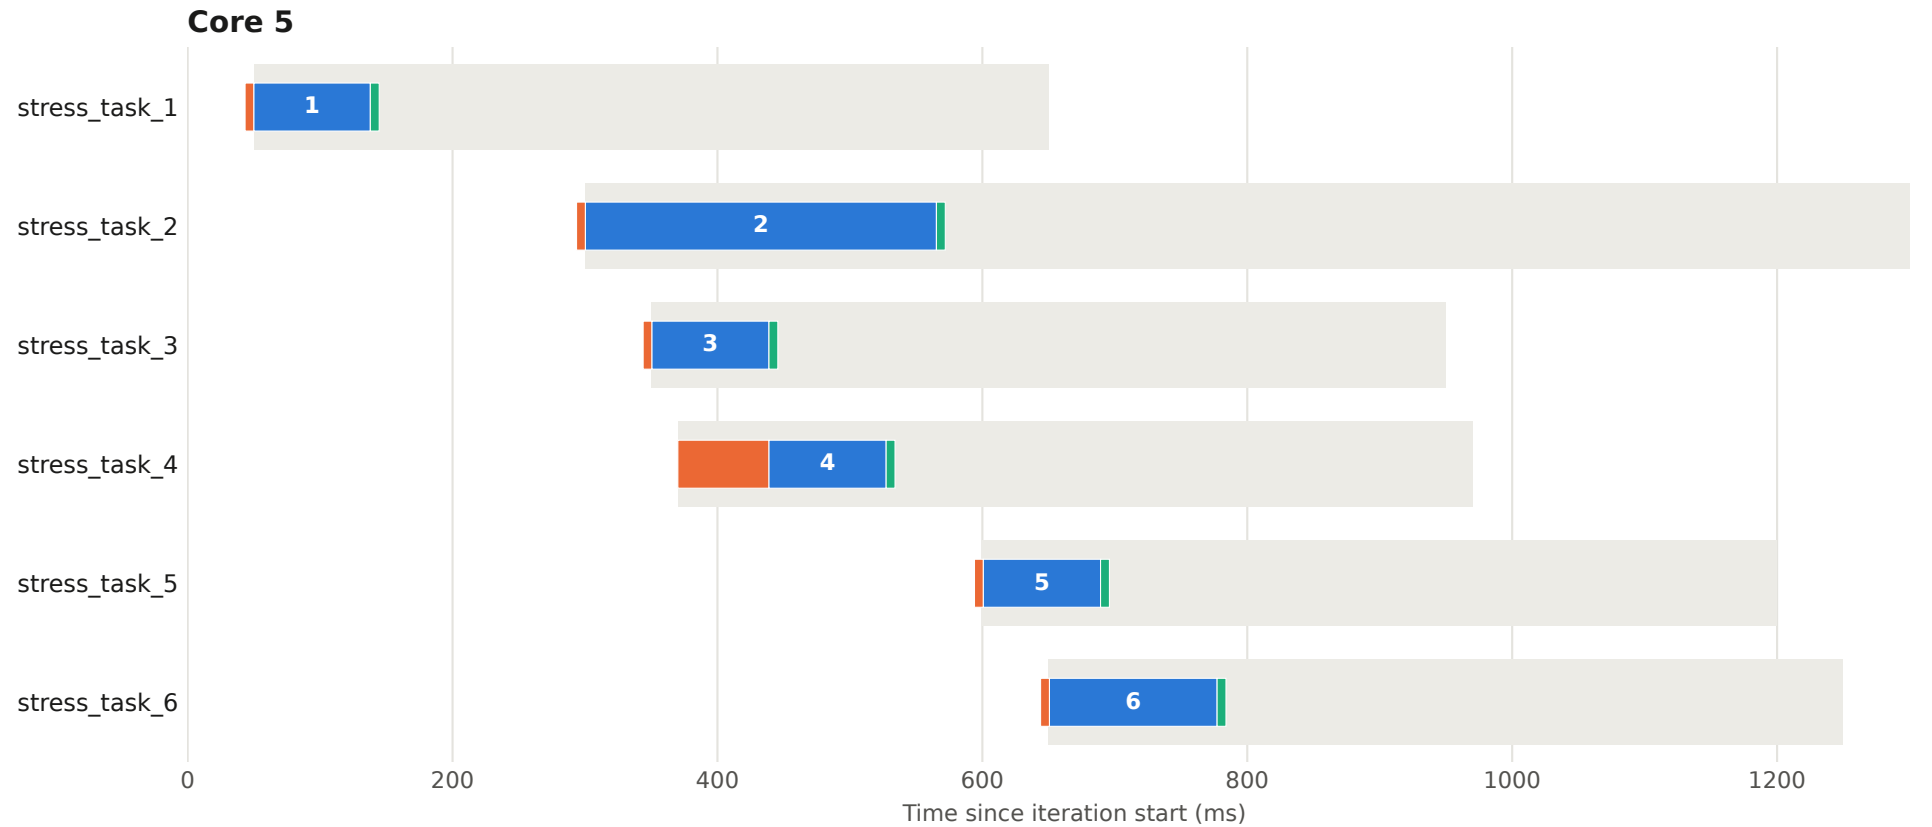


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 23 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

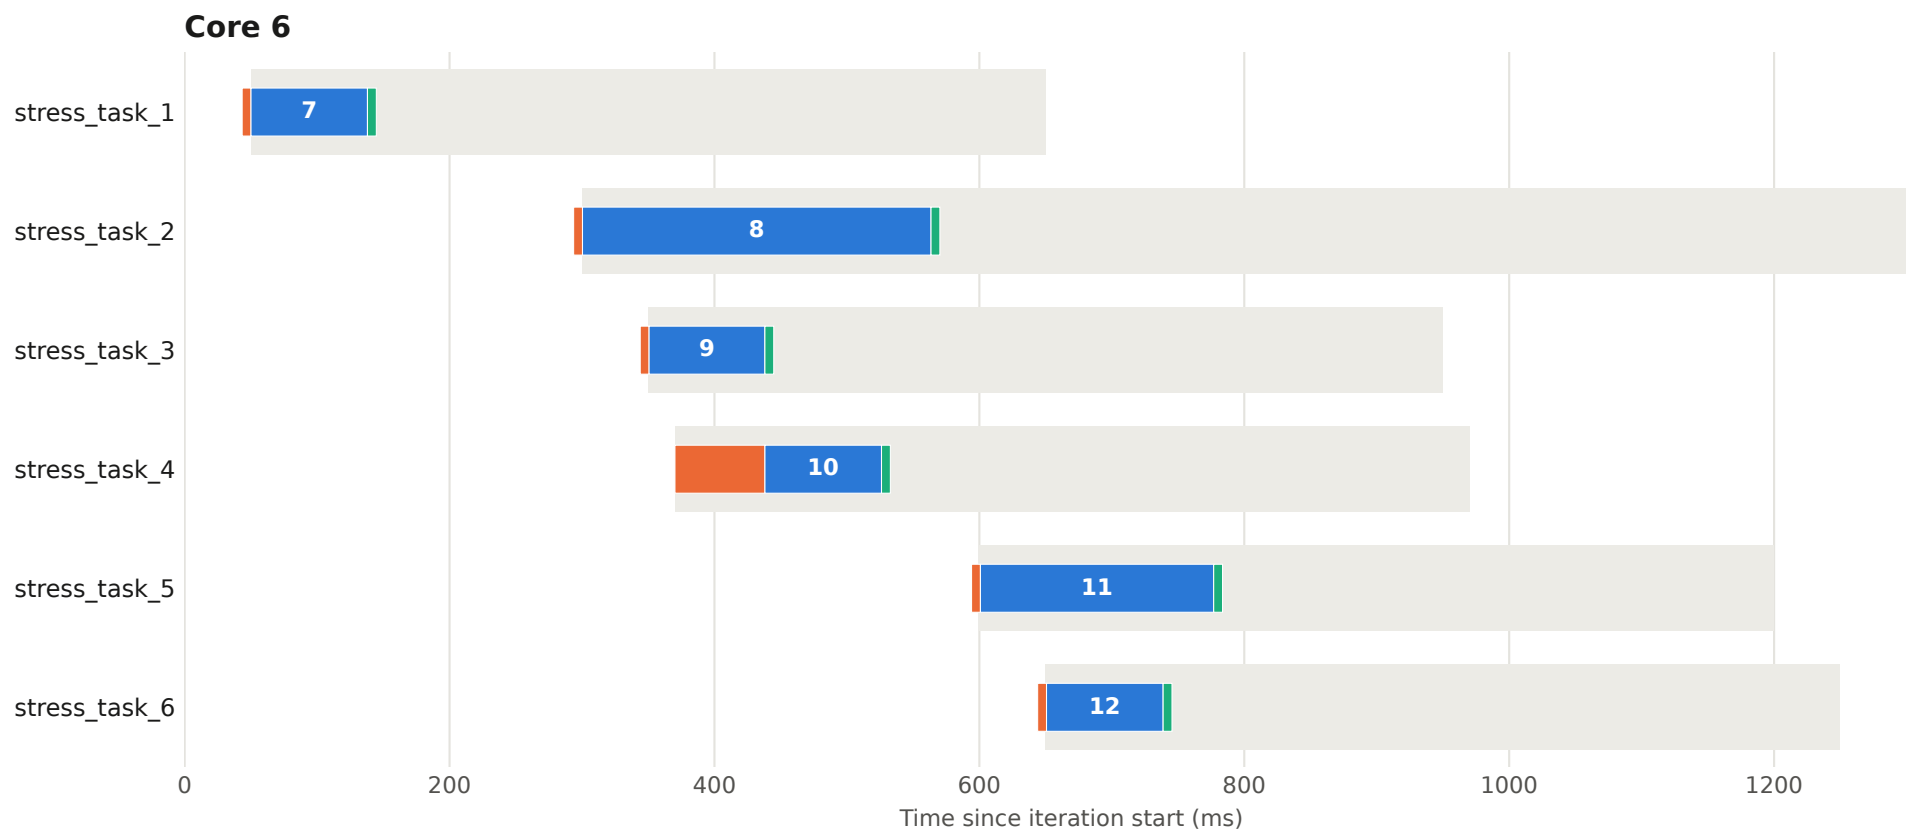


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 24 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

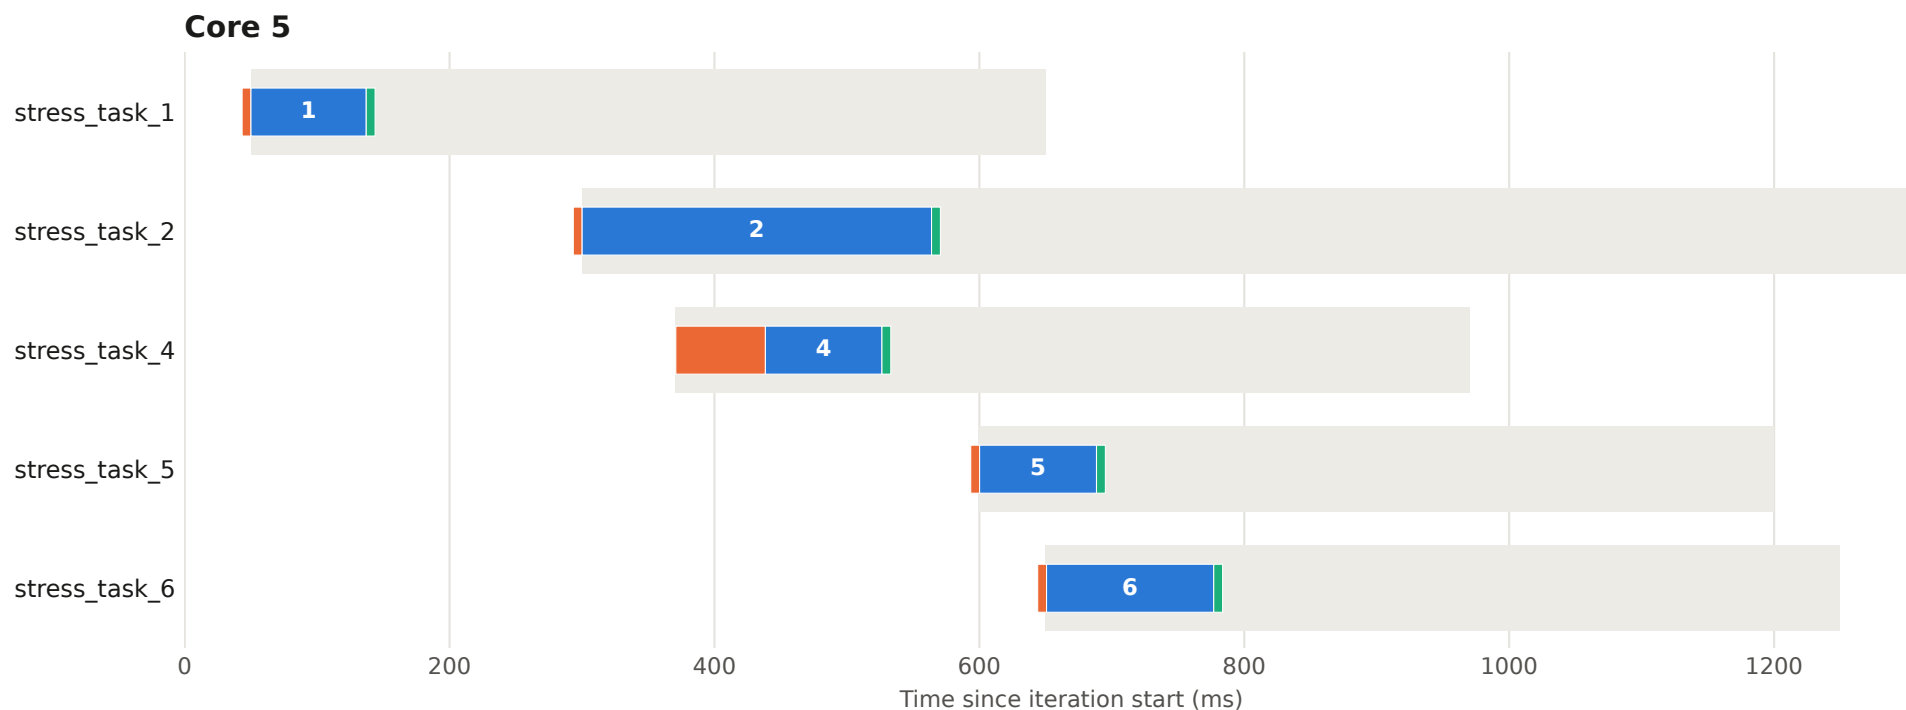


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 24 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

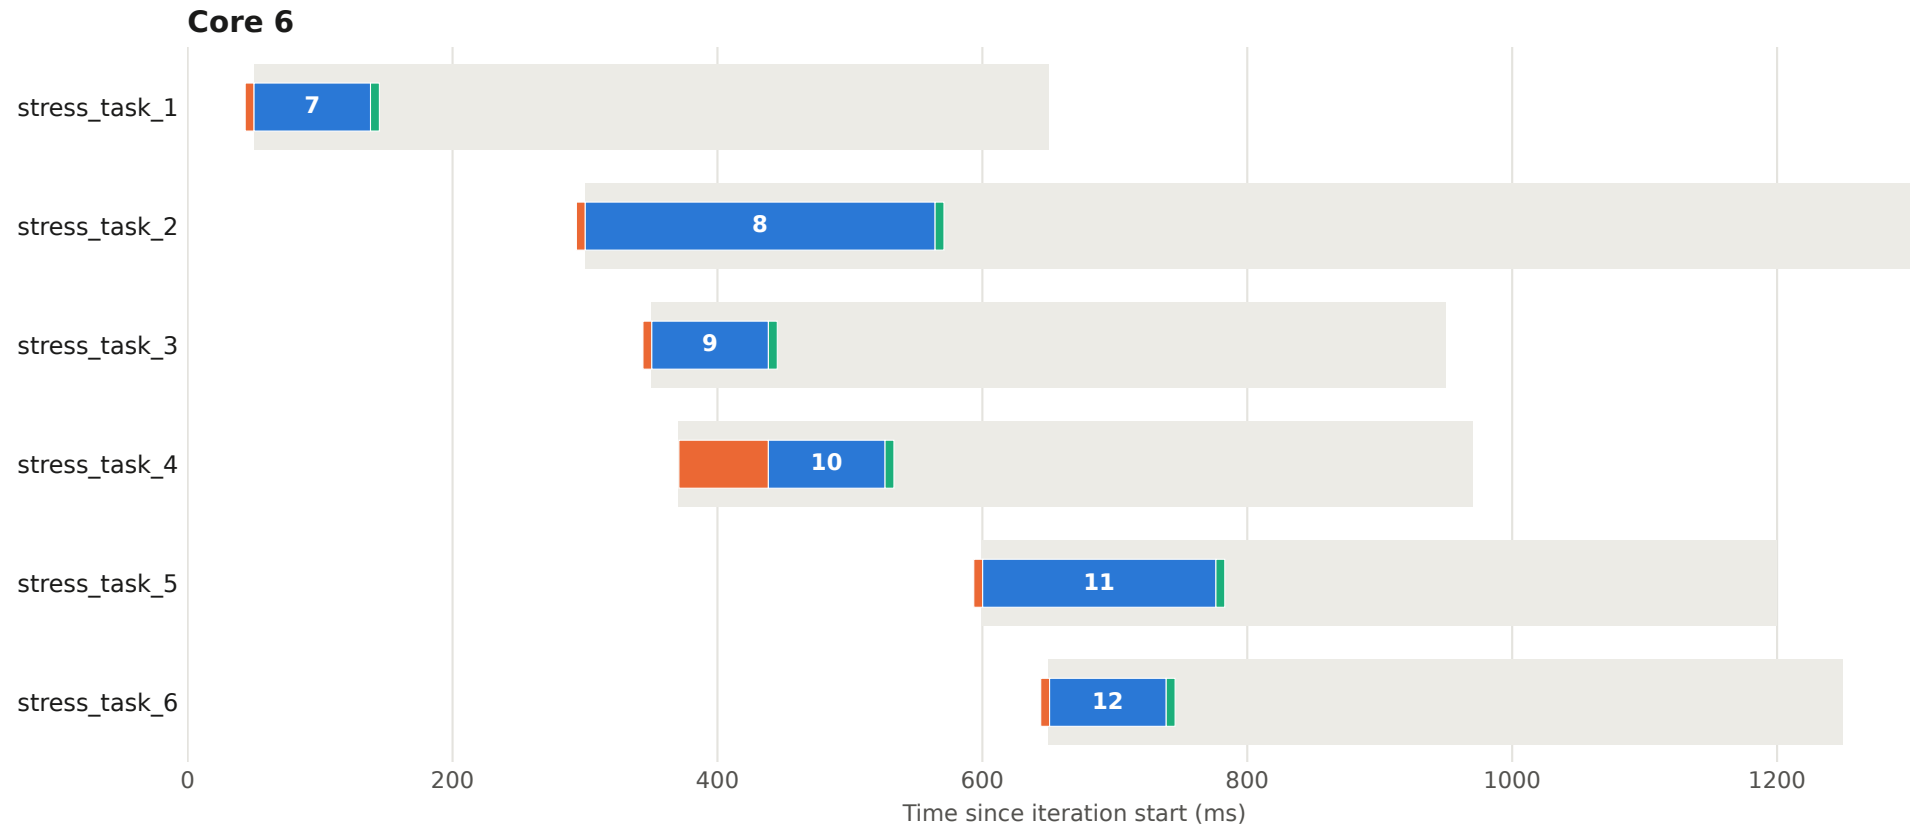


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 25 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

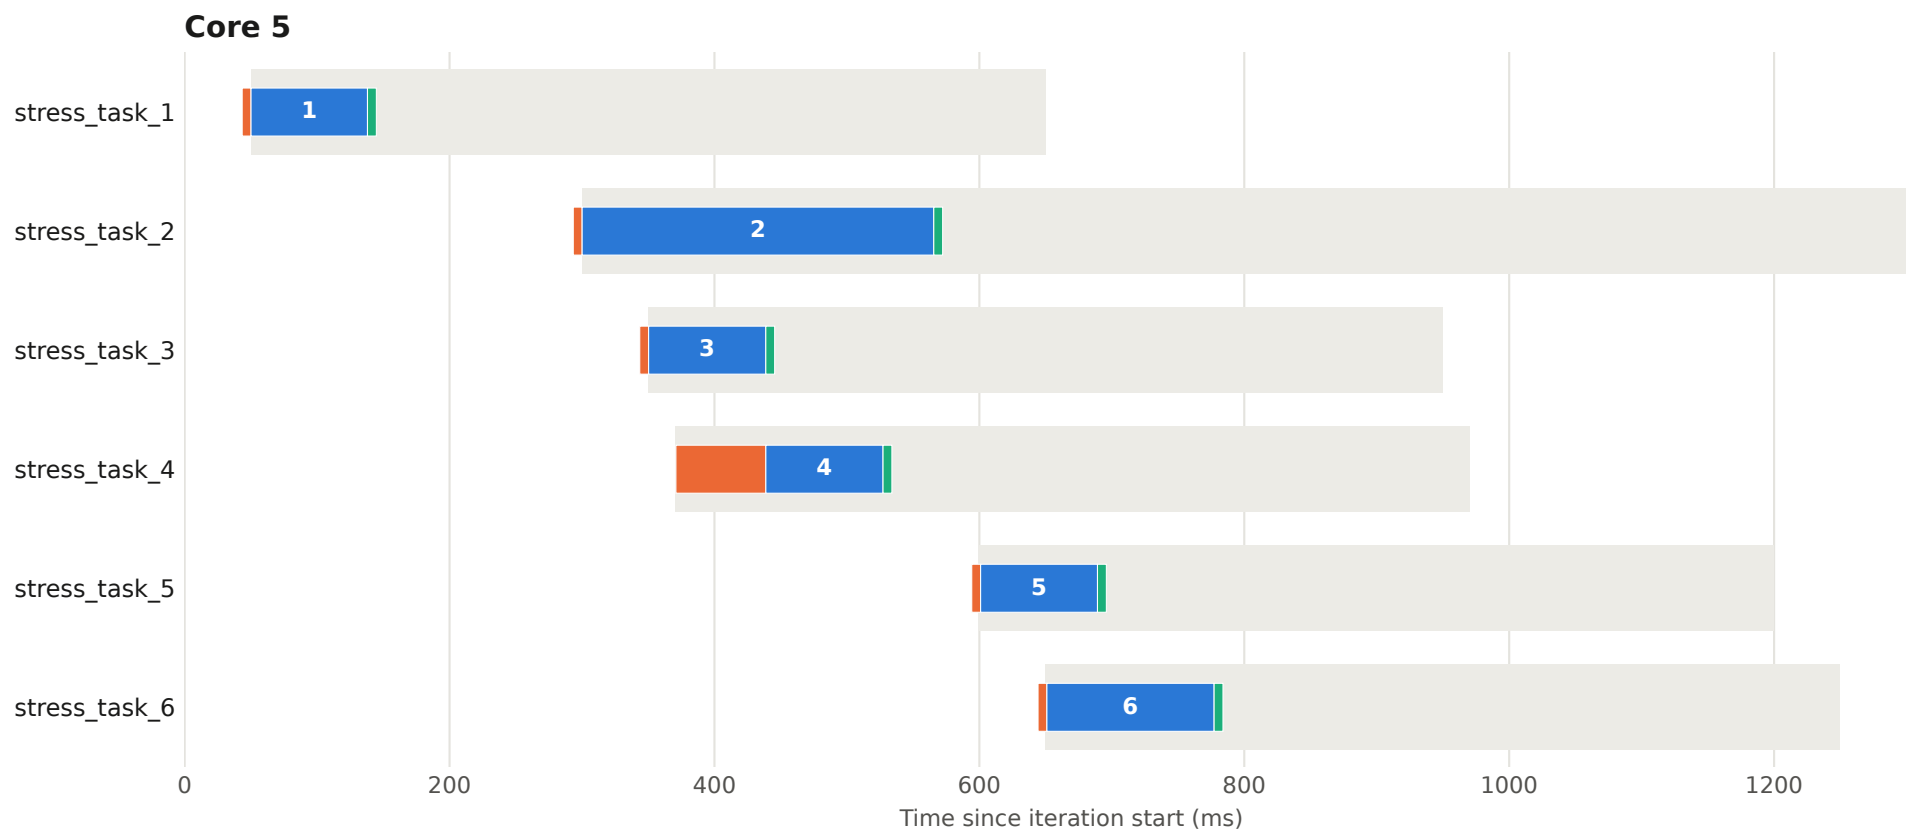


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 25 - core 6

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

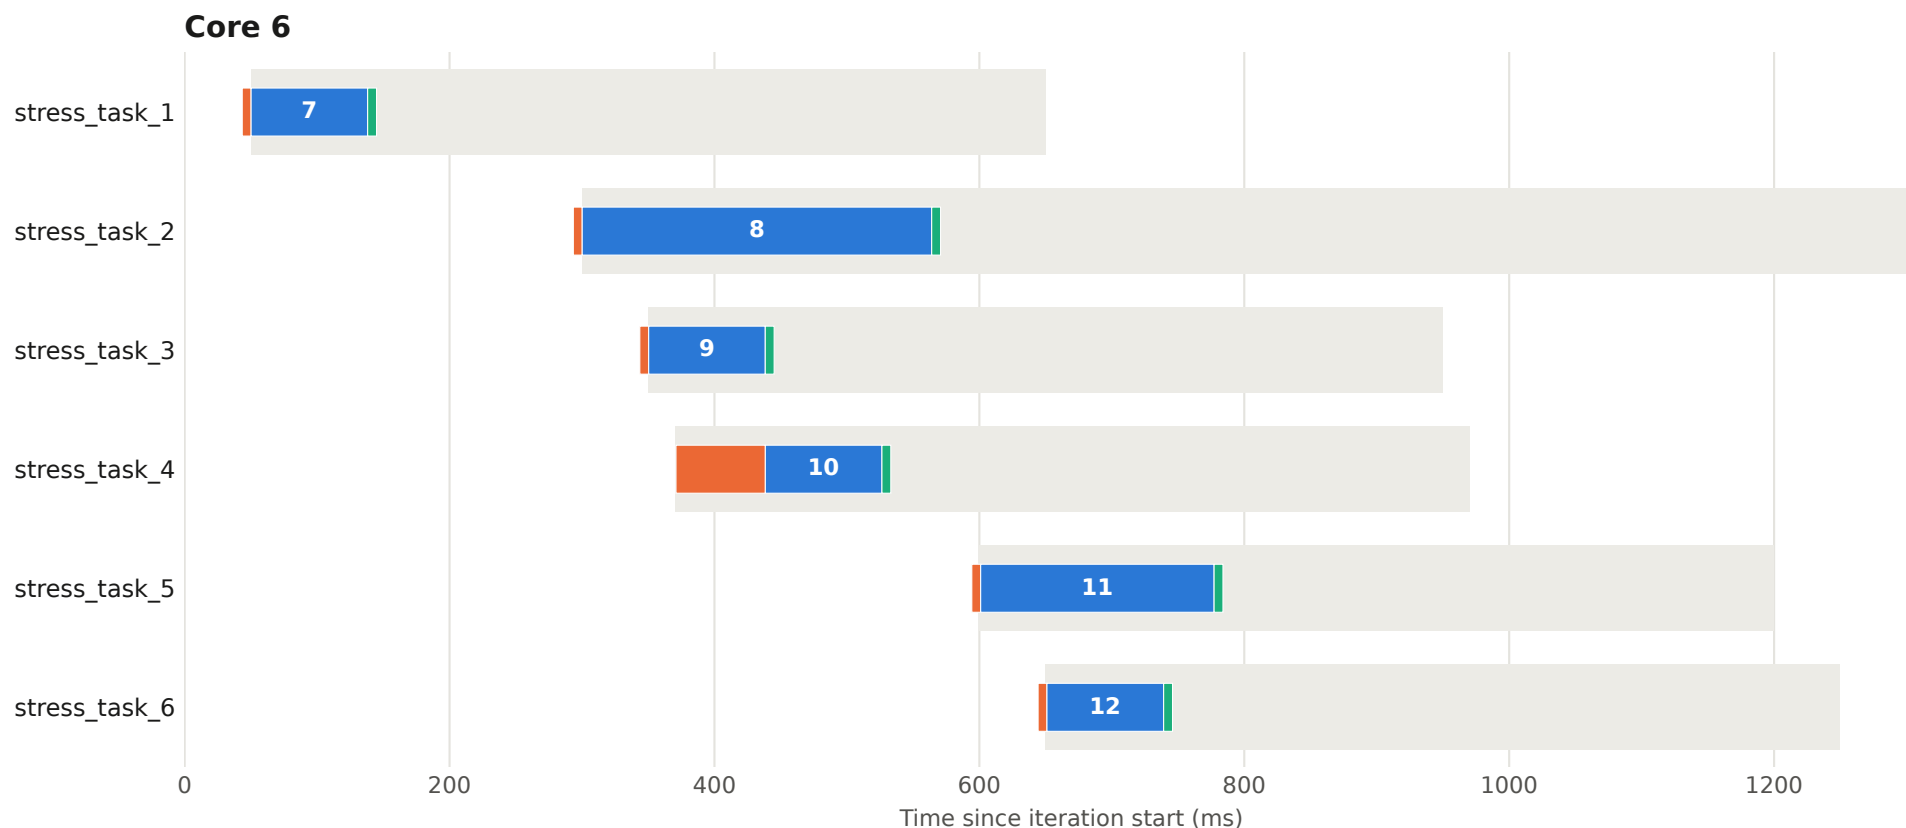

Execution plan - iteration 26 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

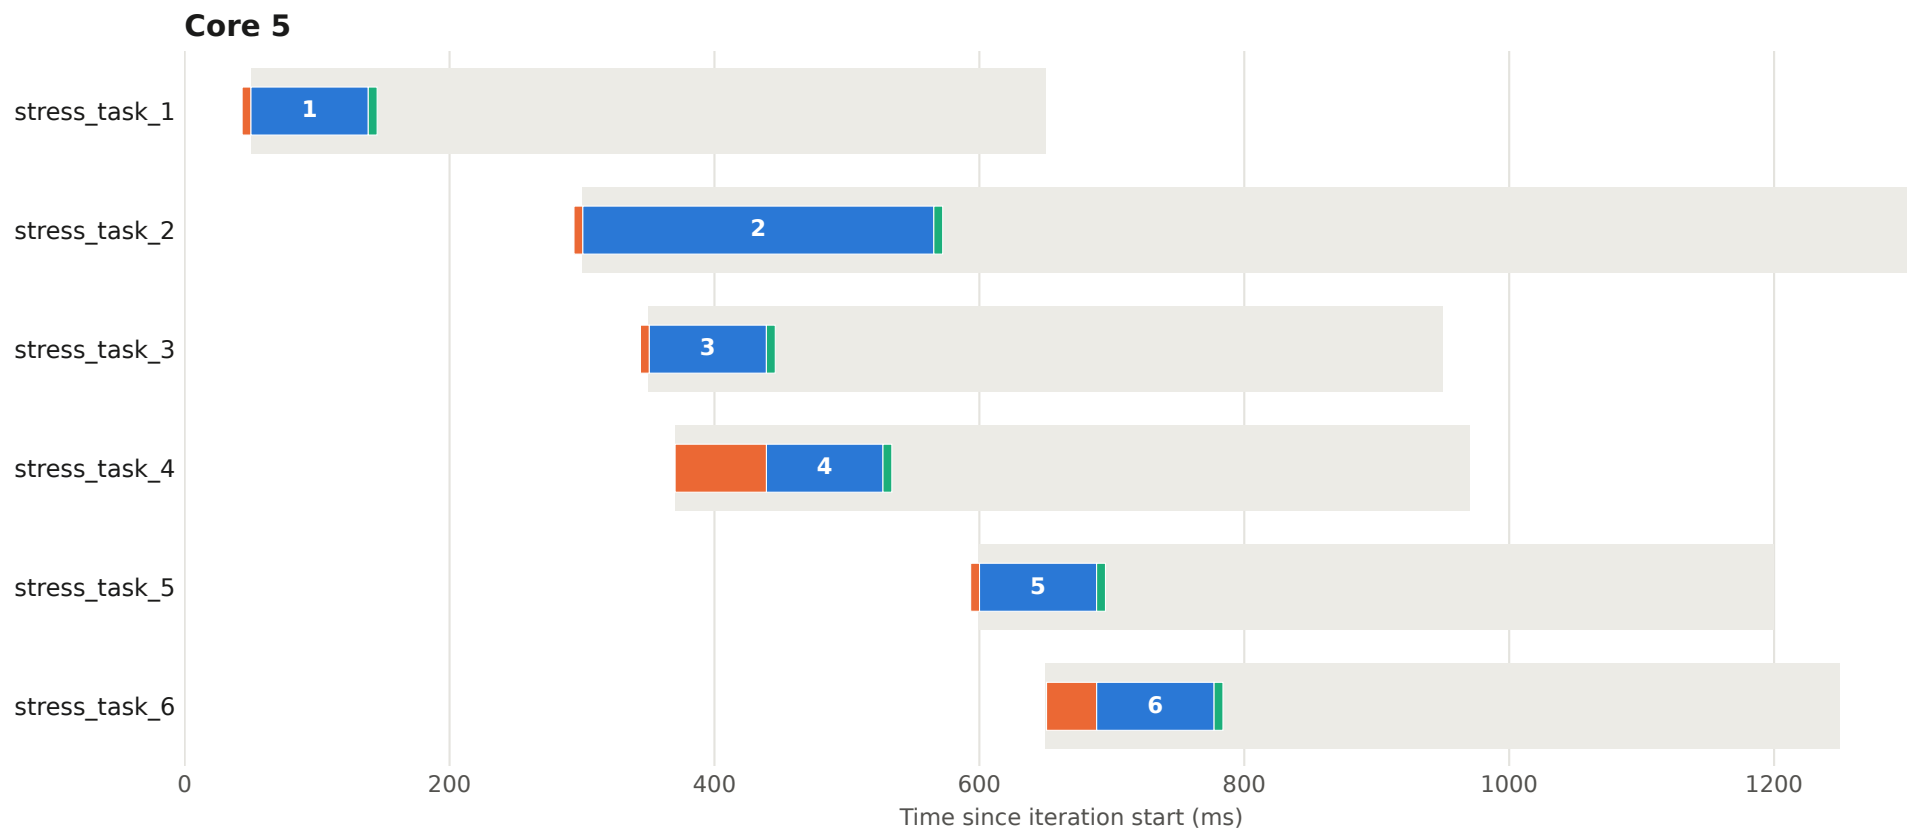


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 26 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

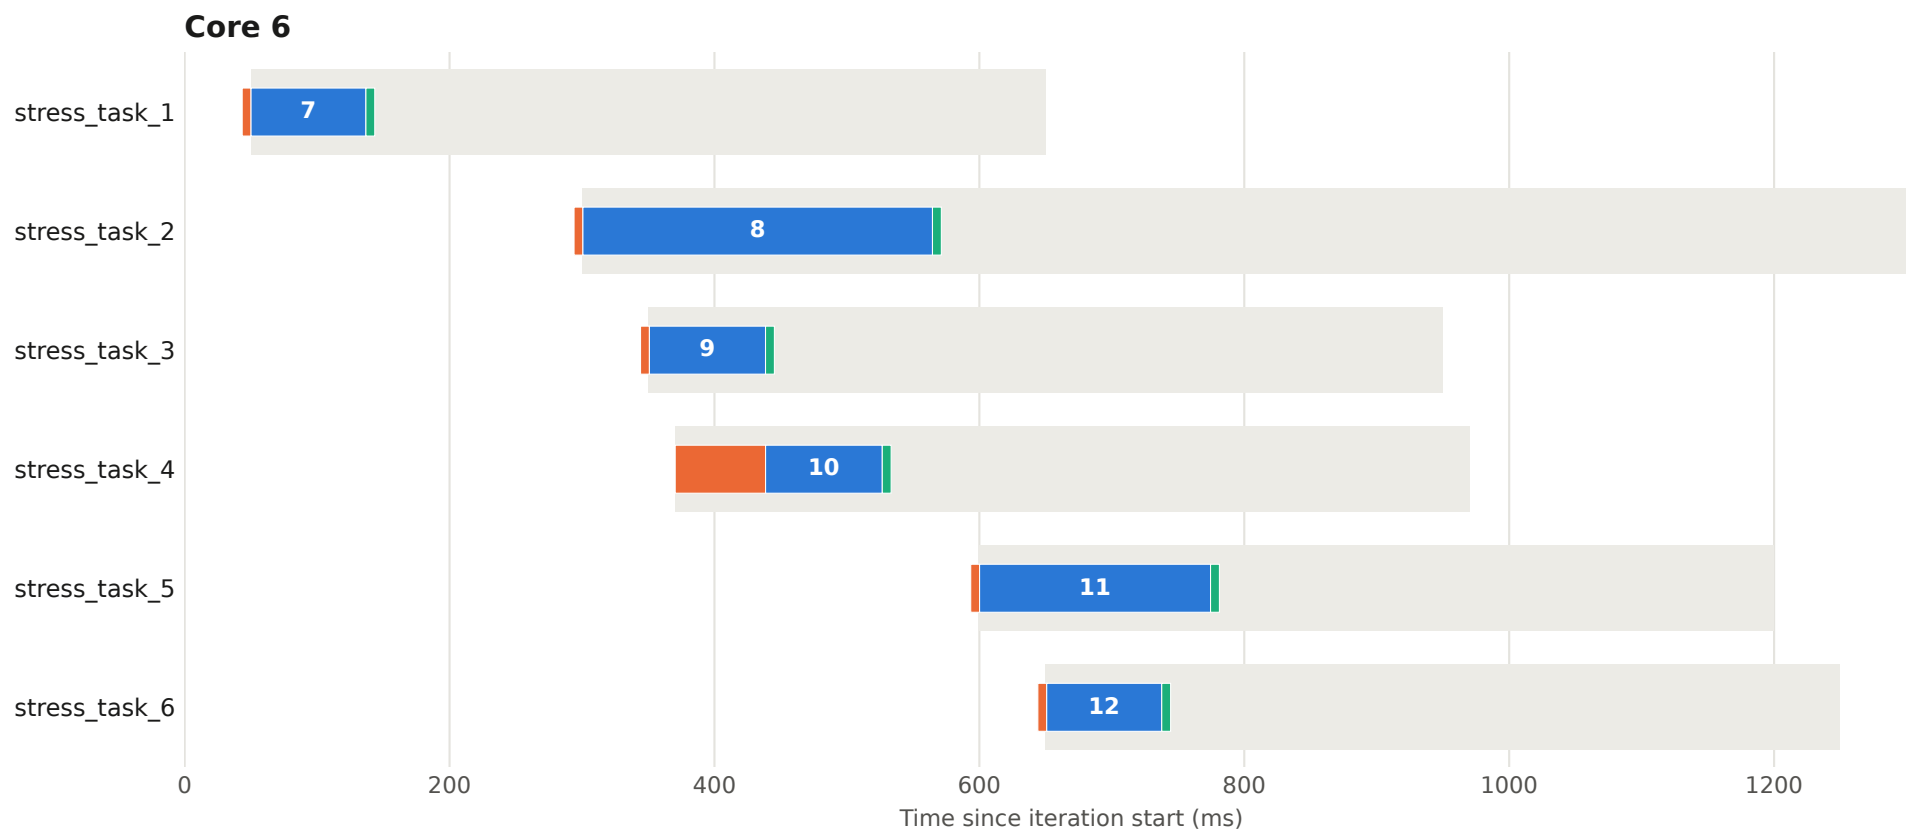


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 27 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

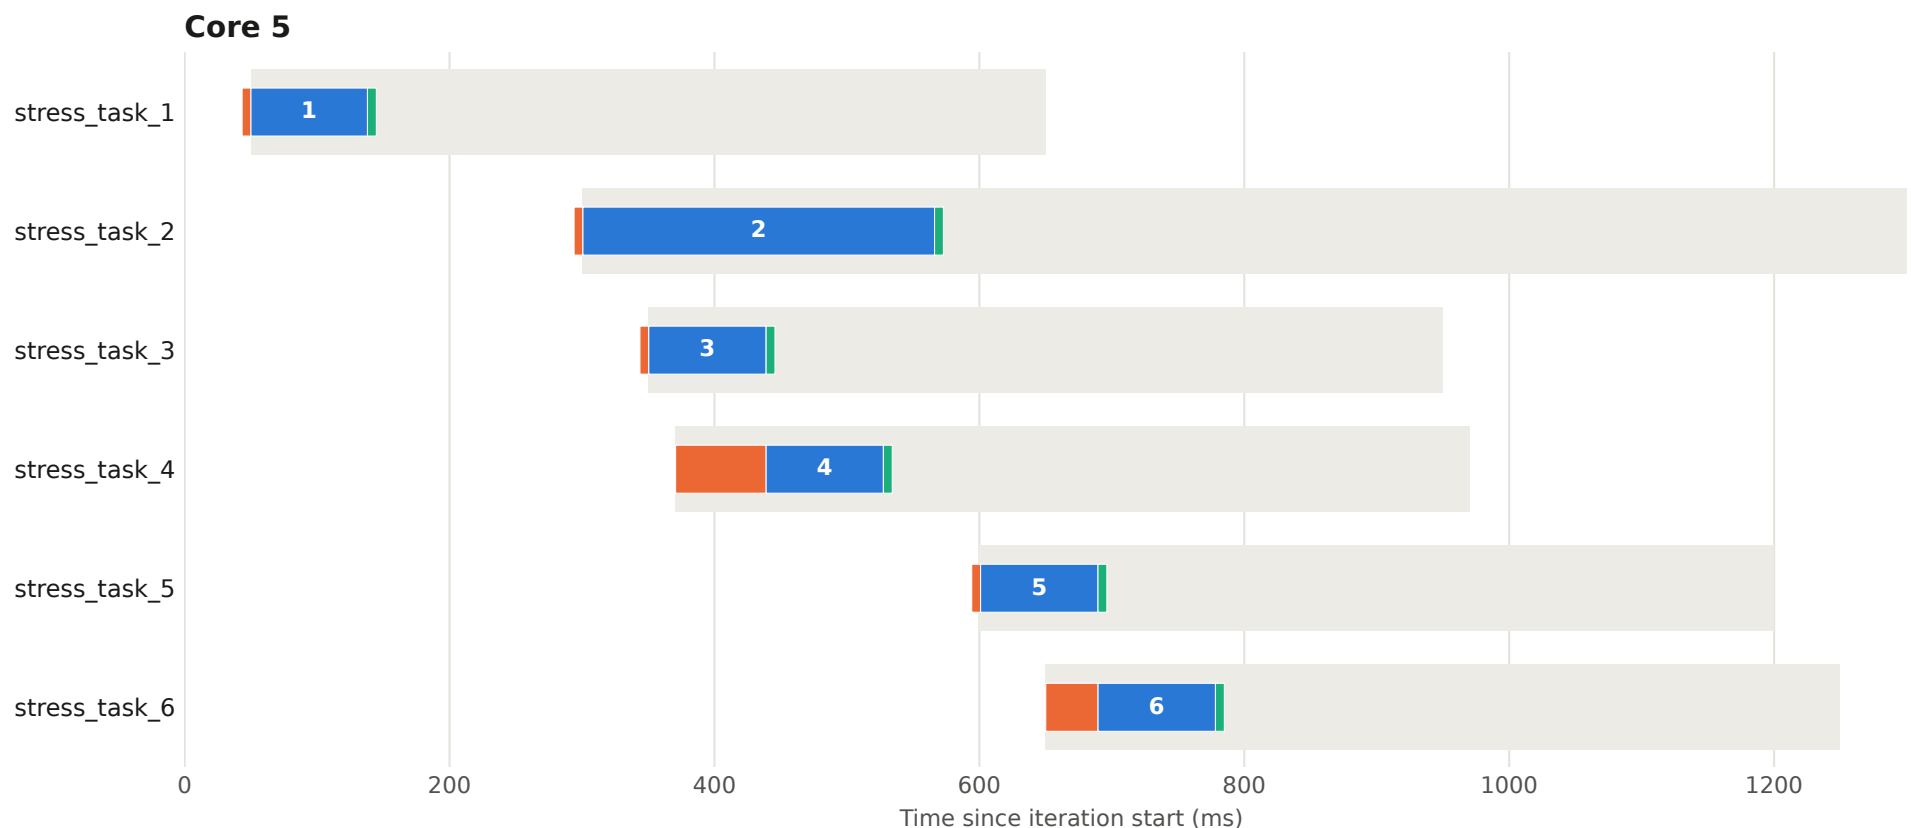


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 27 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

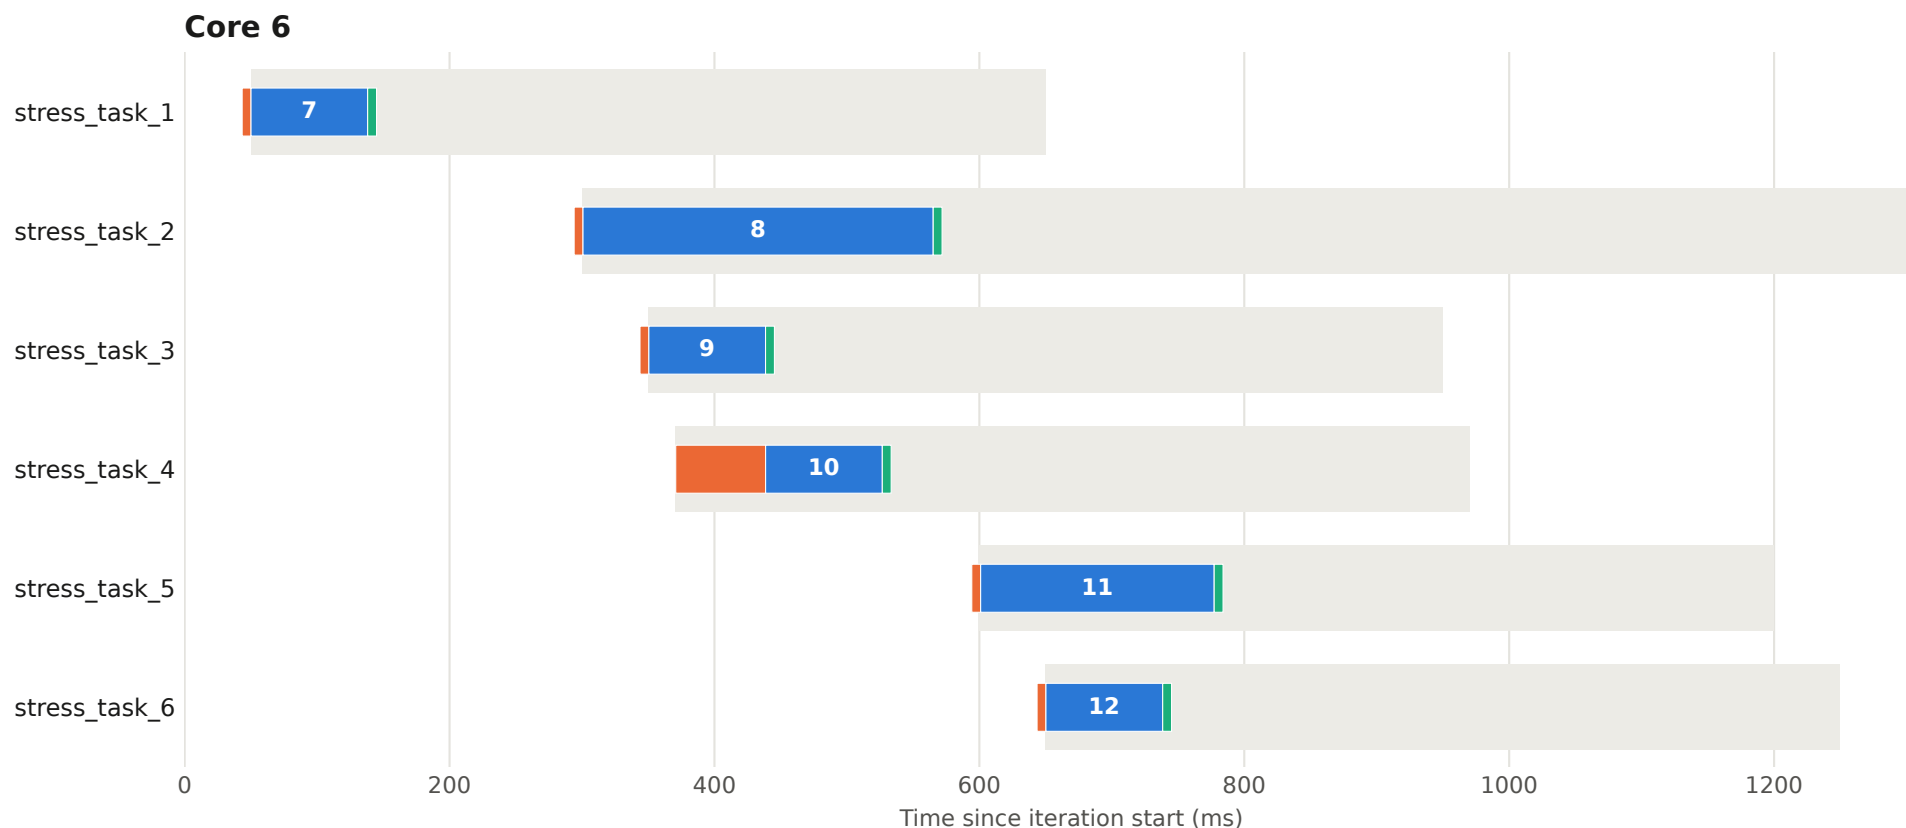


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 28 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

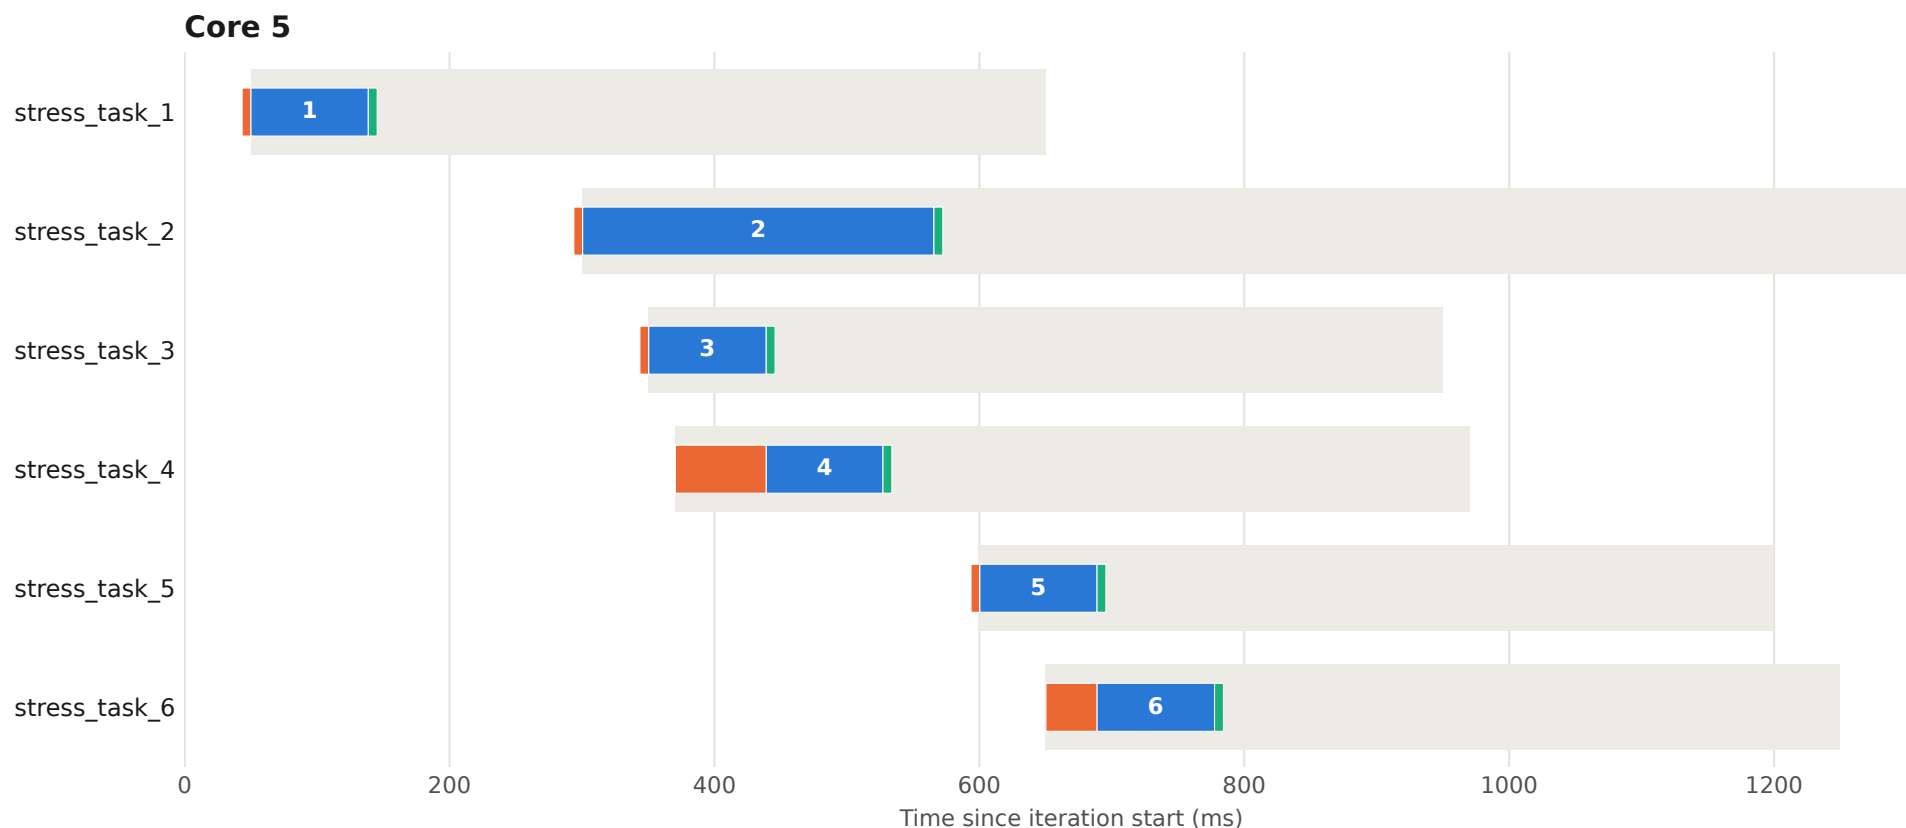


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 28 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

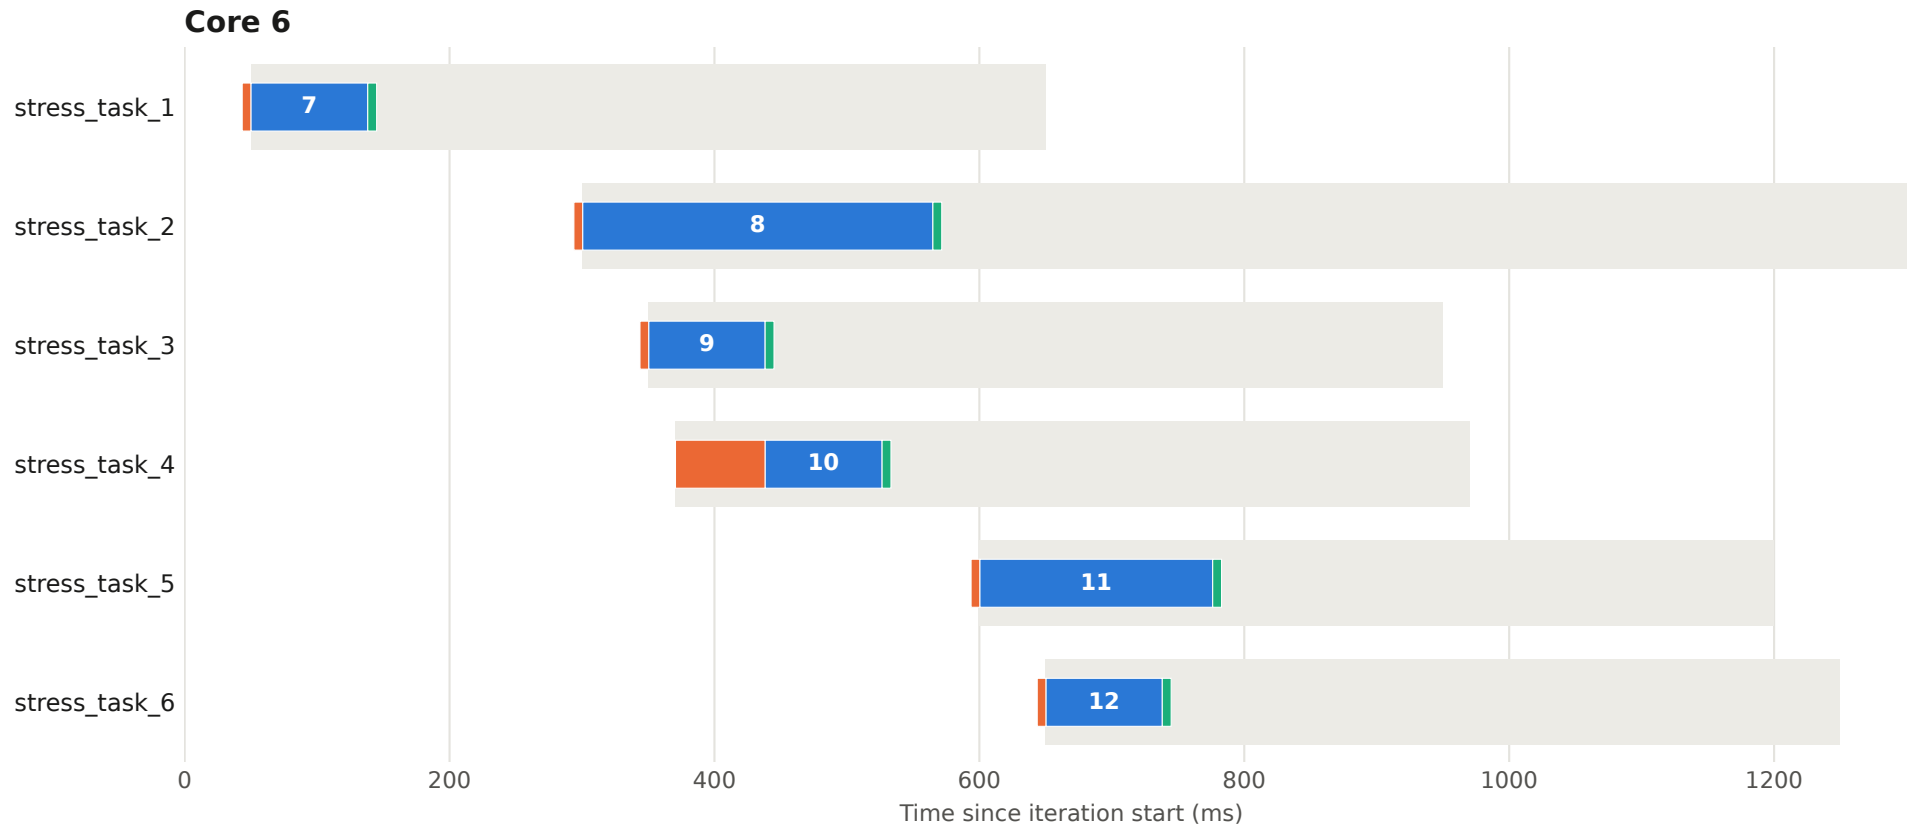


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 29 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

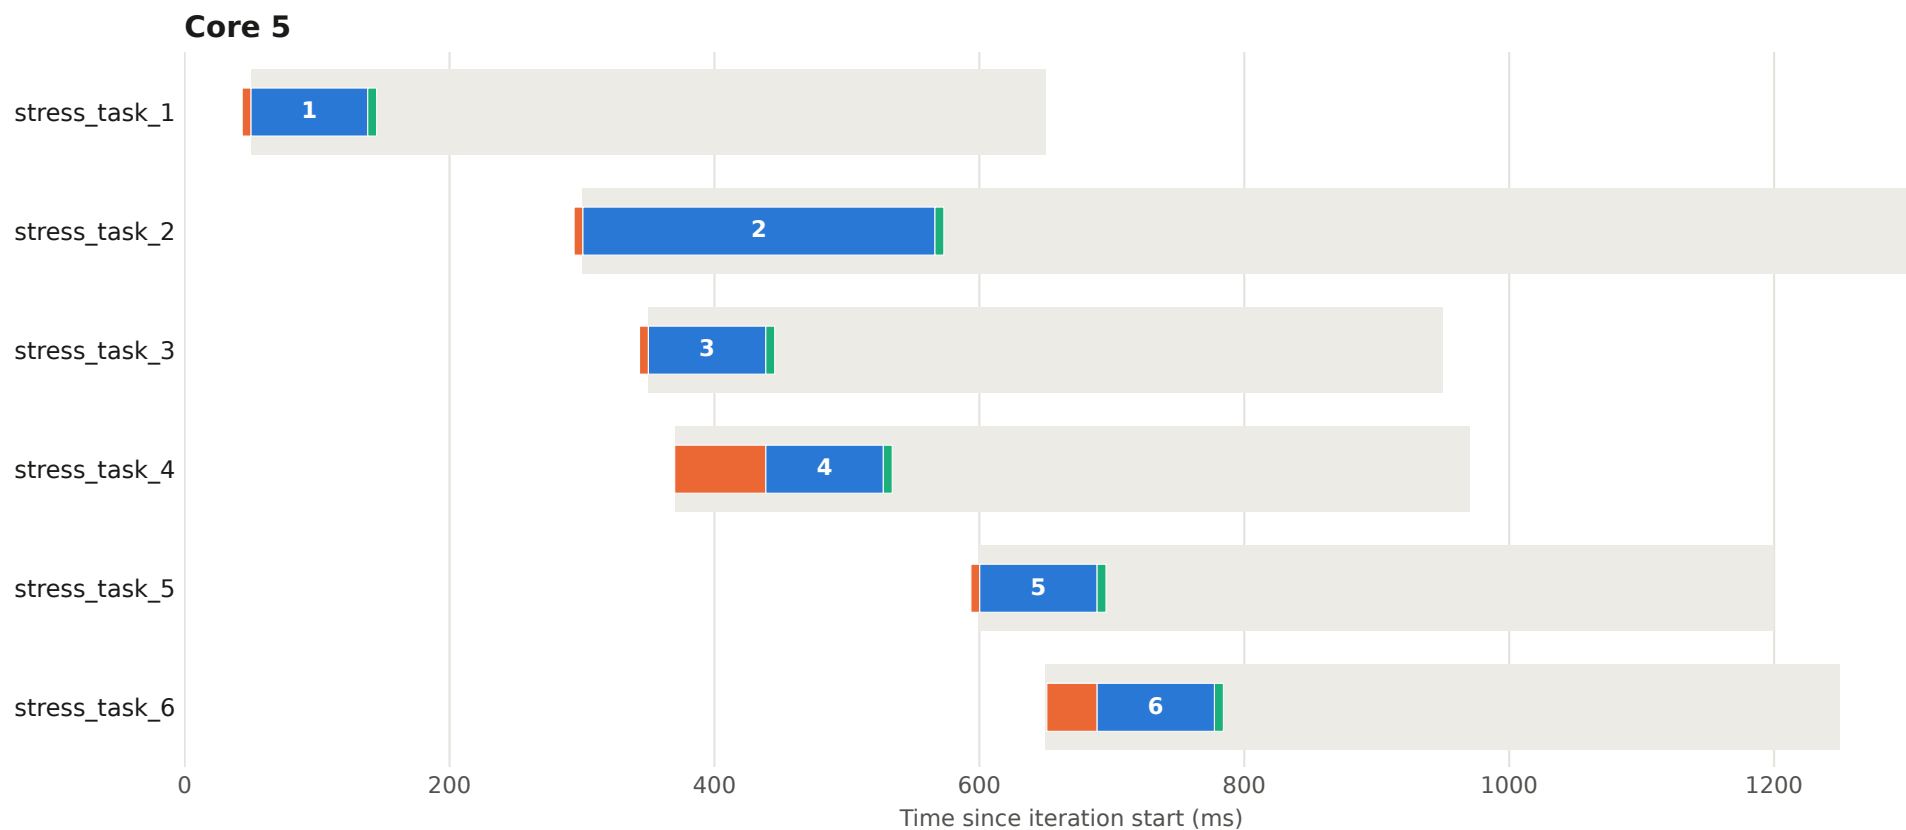


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 29 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

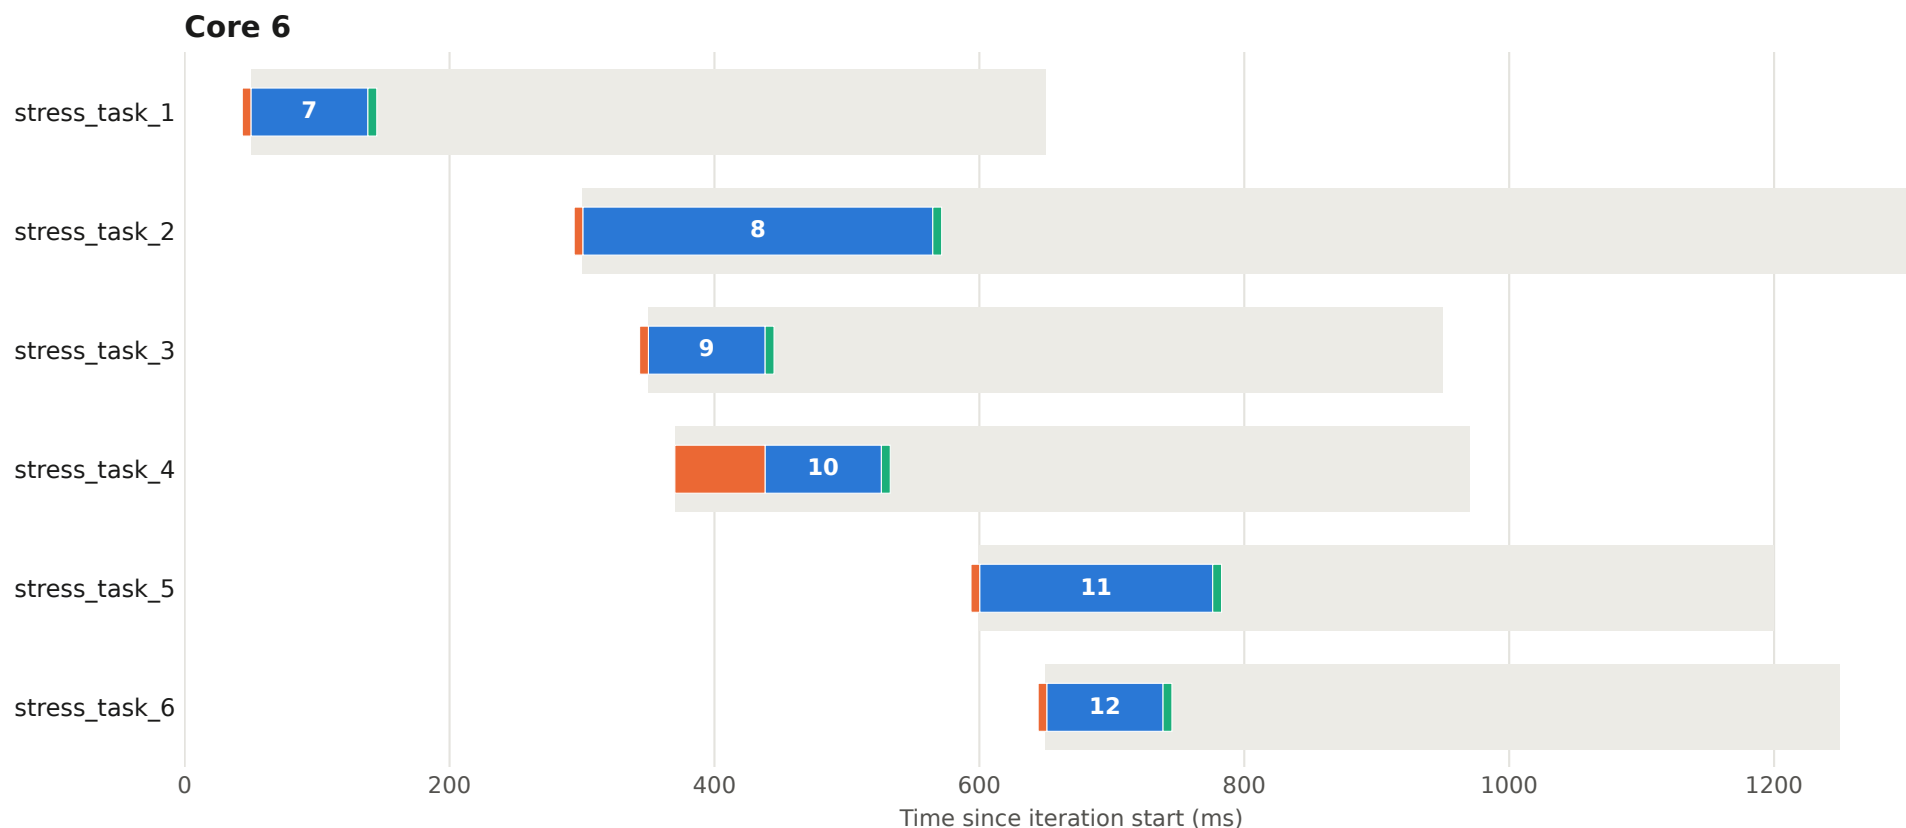


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 30 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

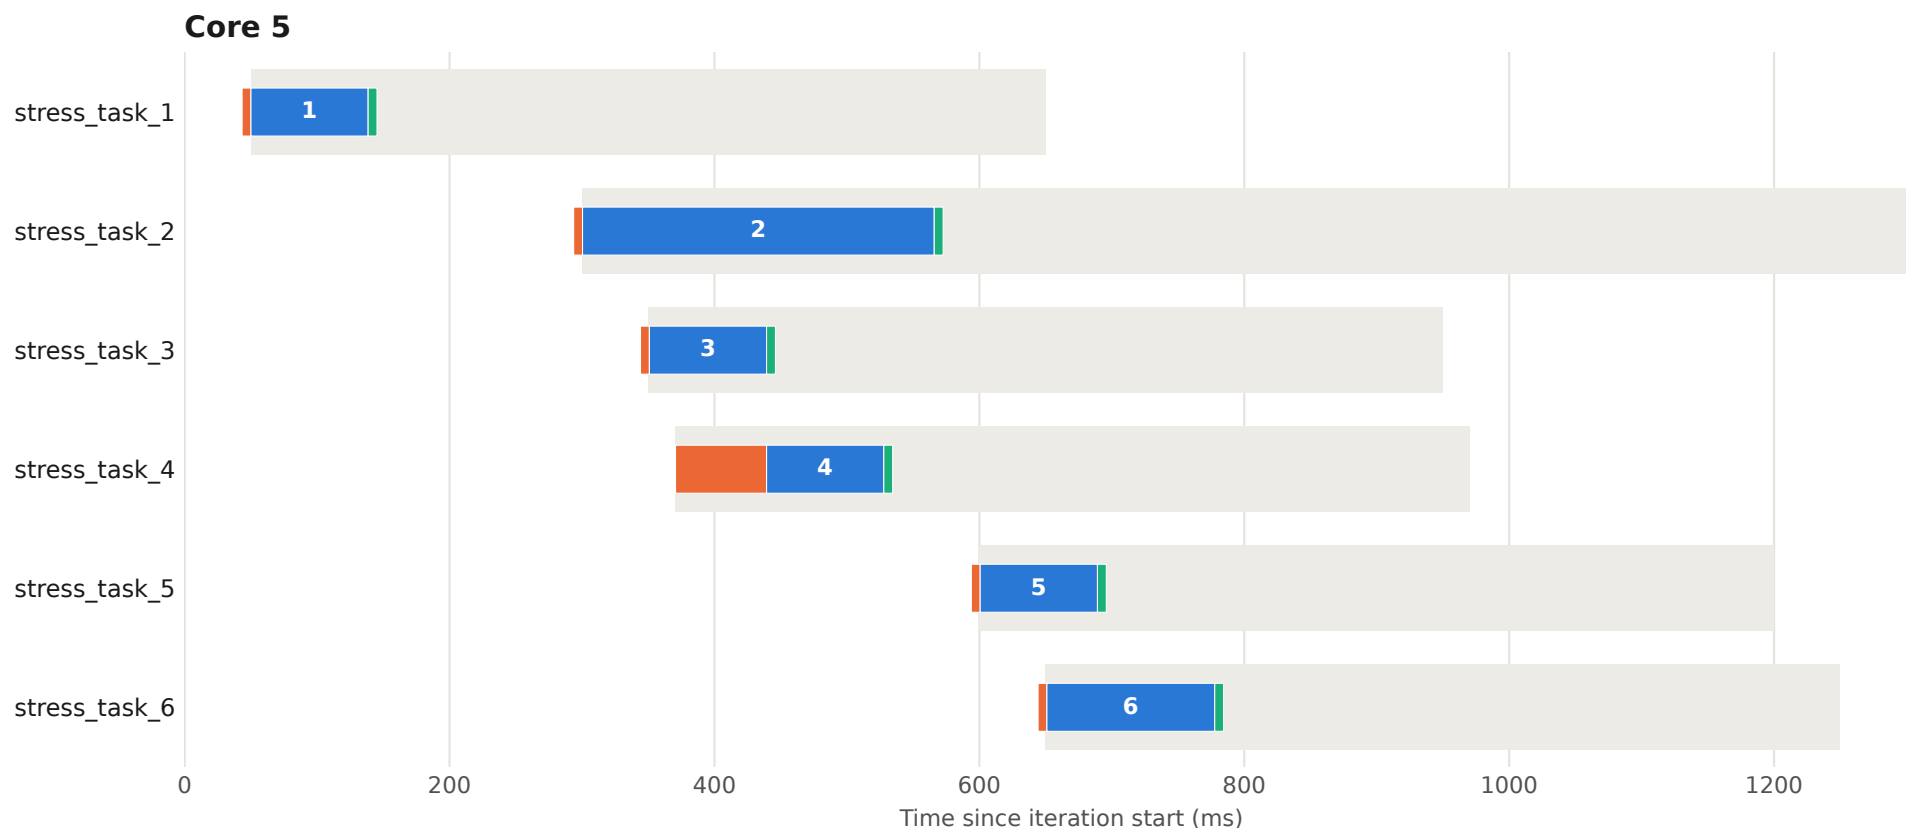


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 30 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

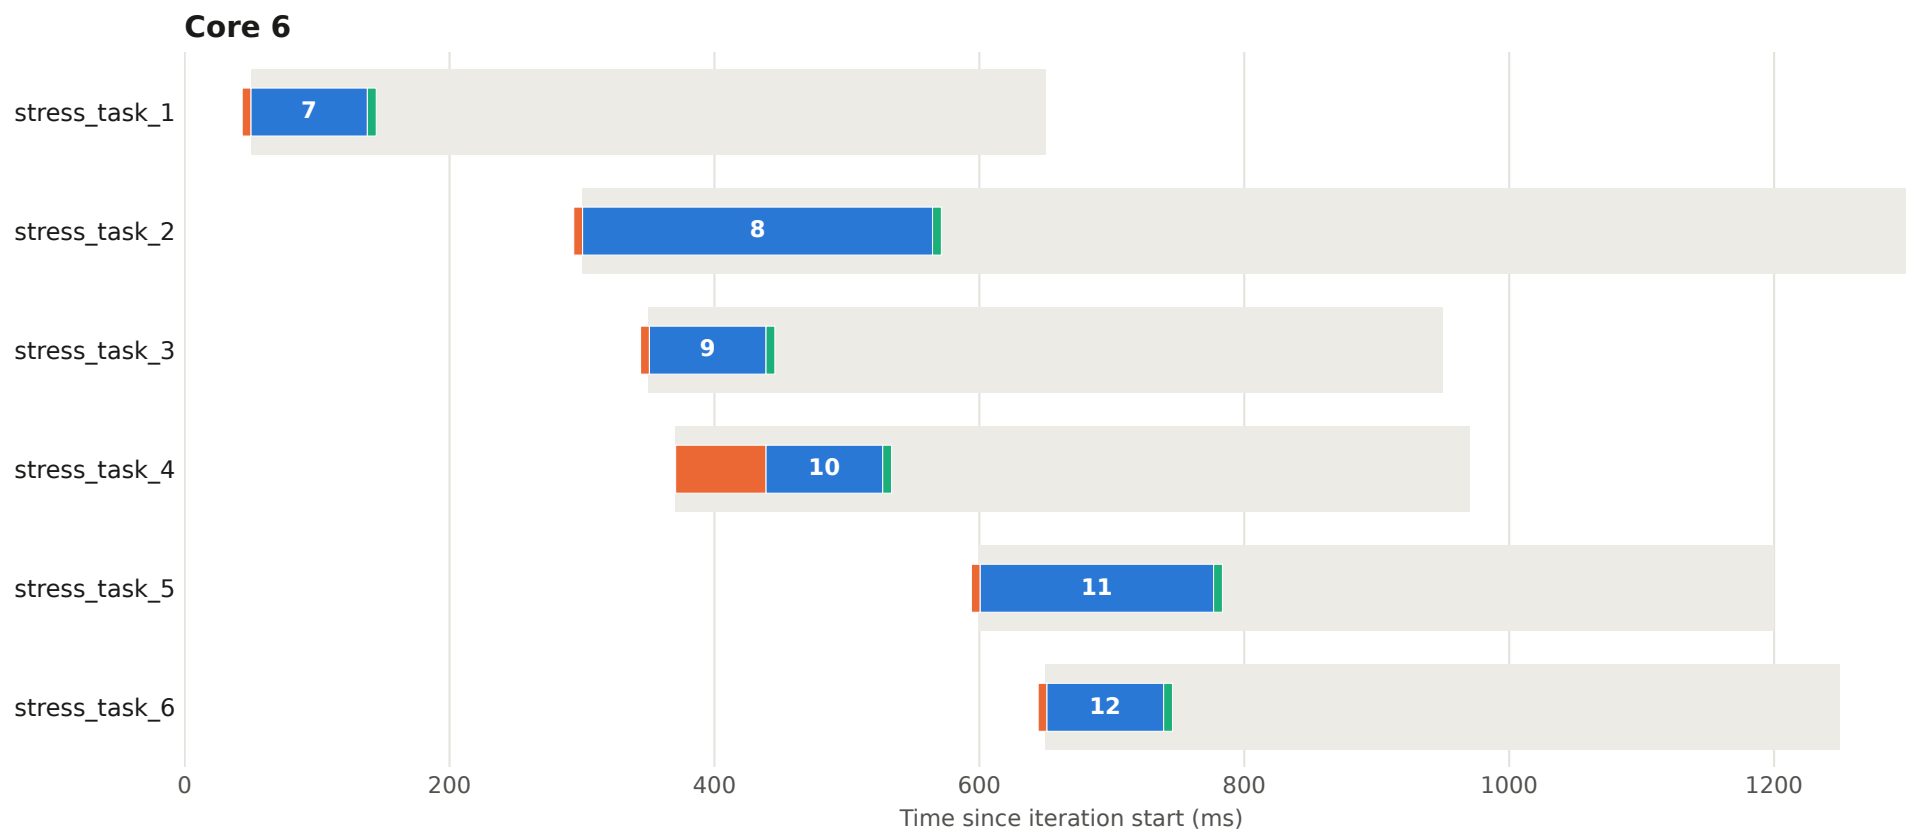


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 31 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

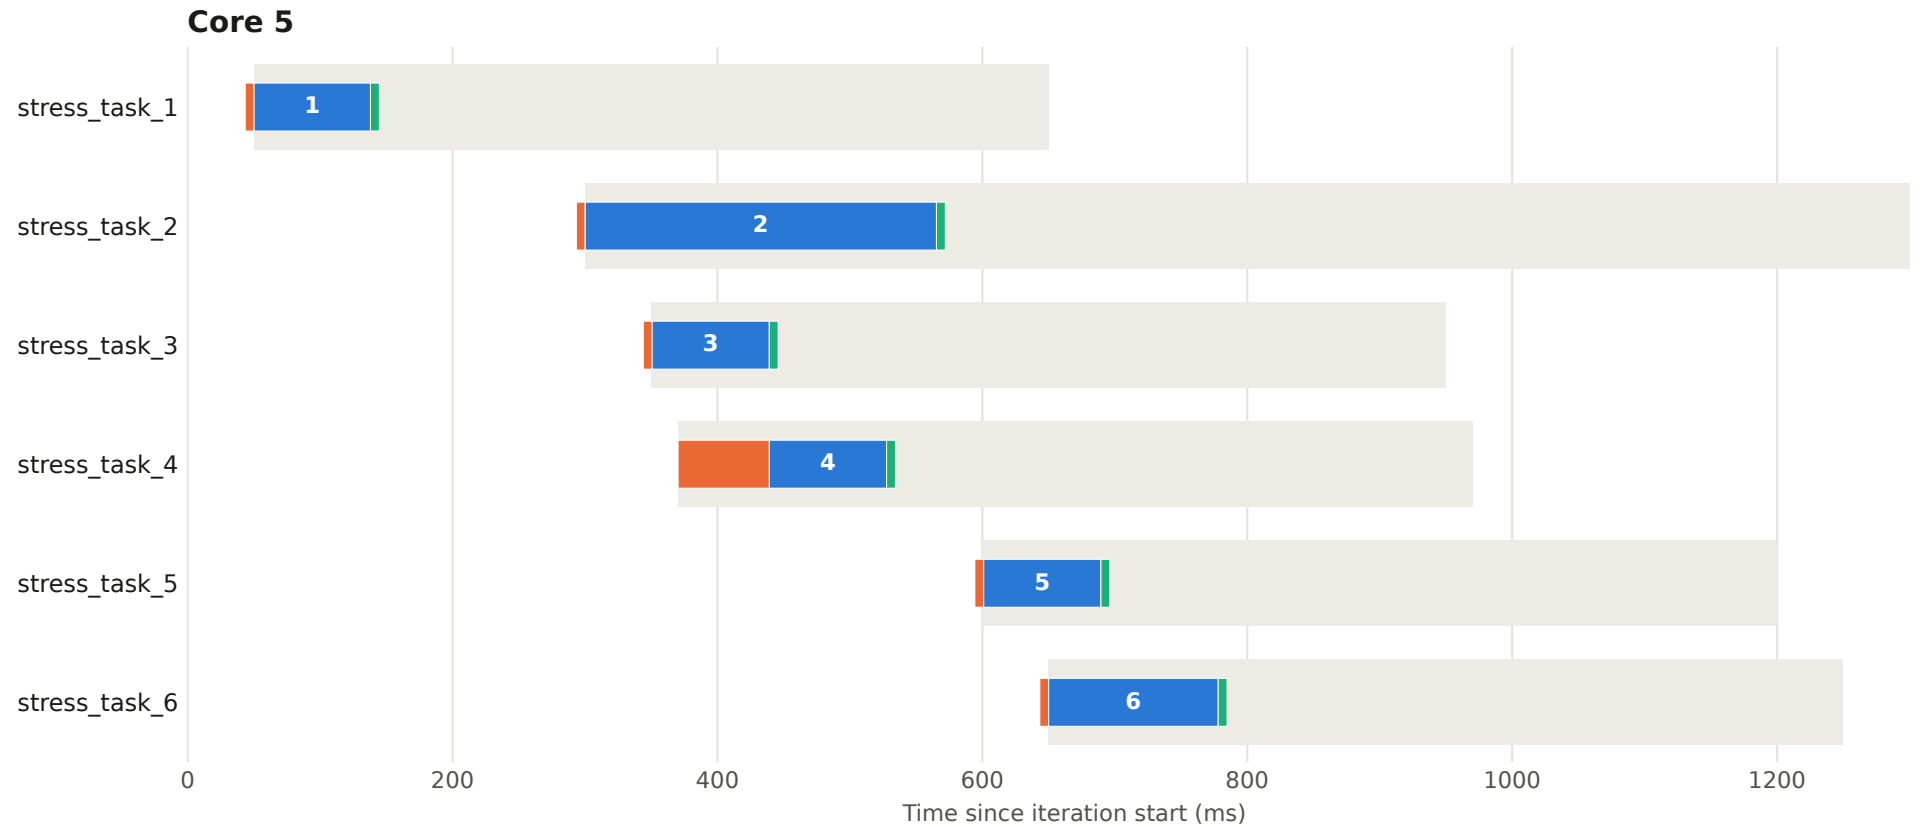


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 31 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

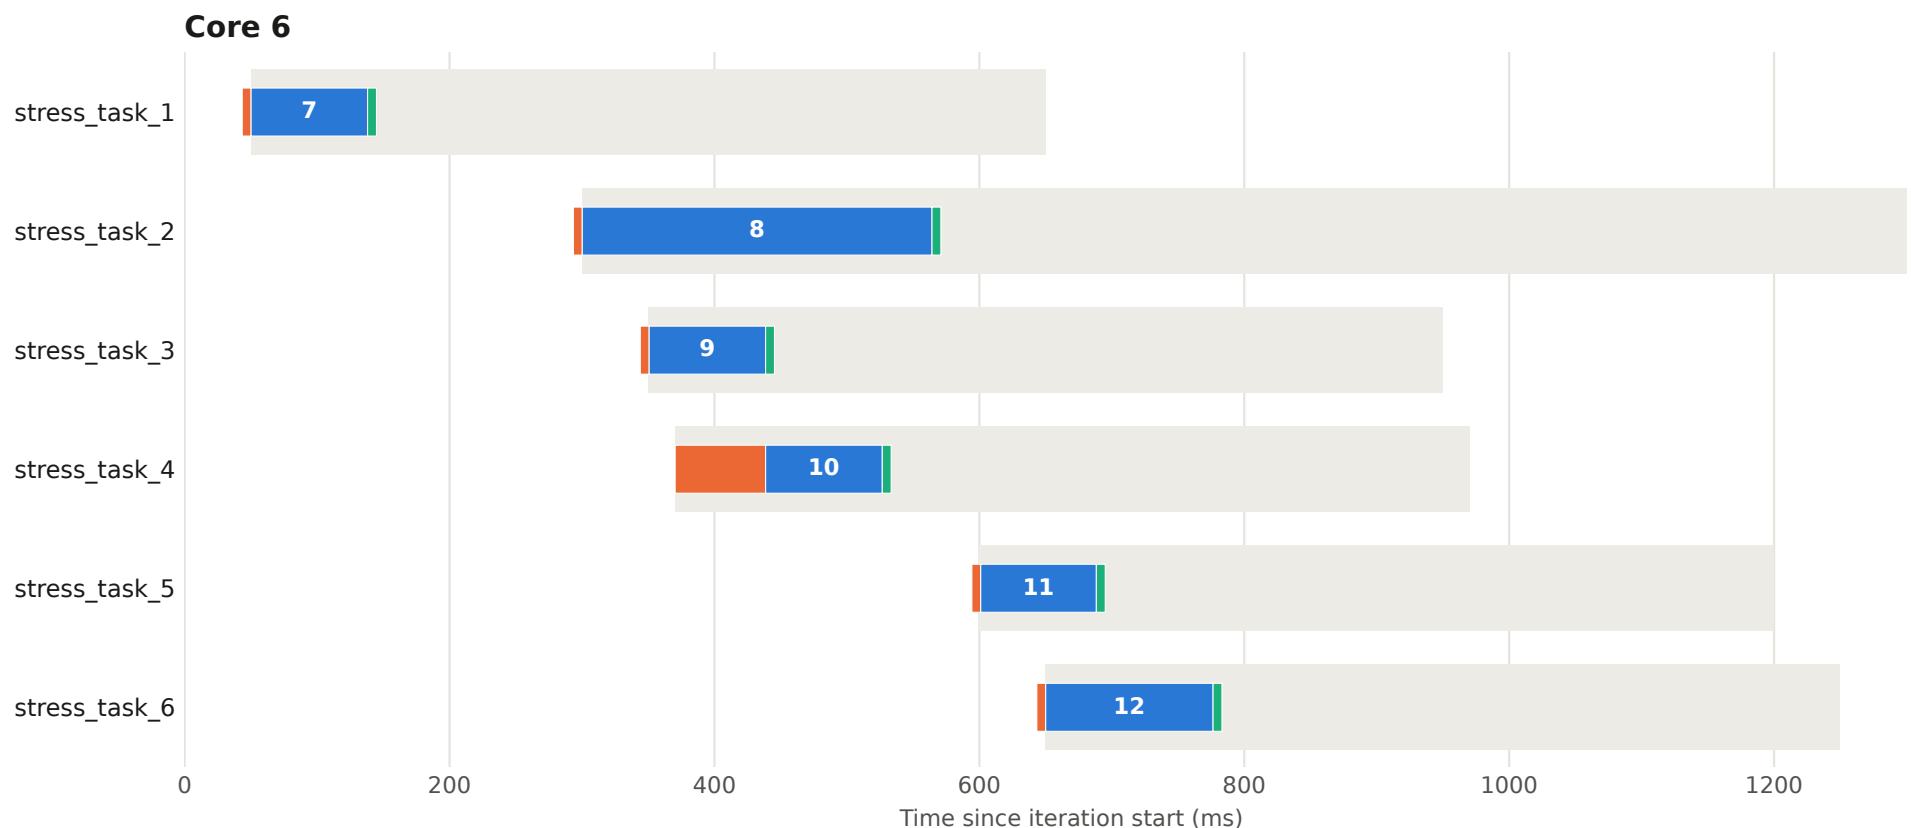


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 32 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

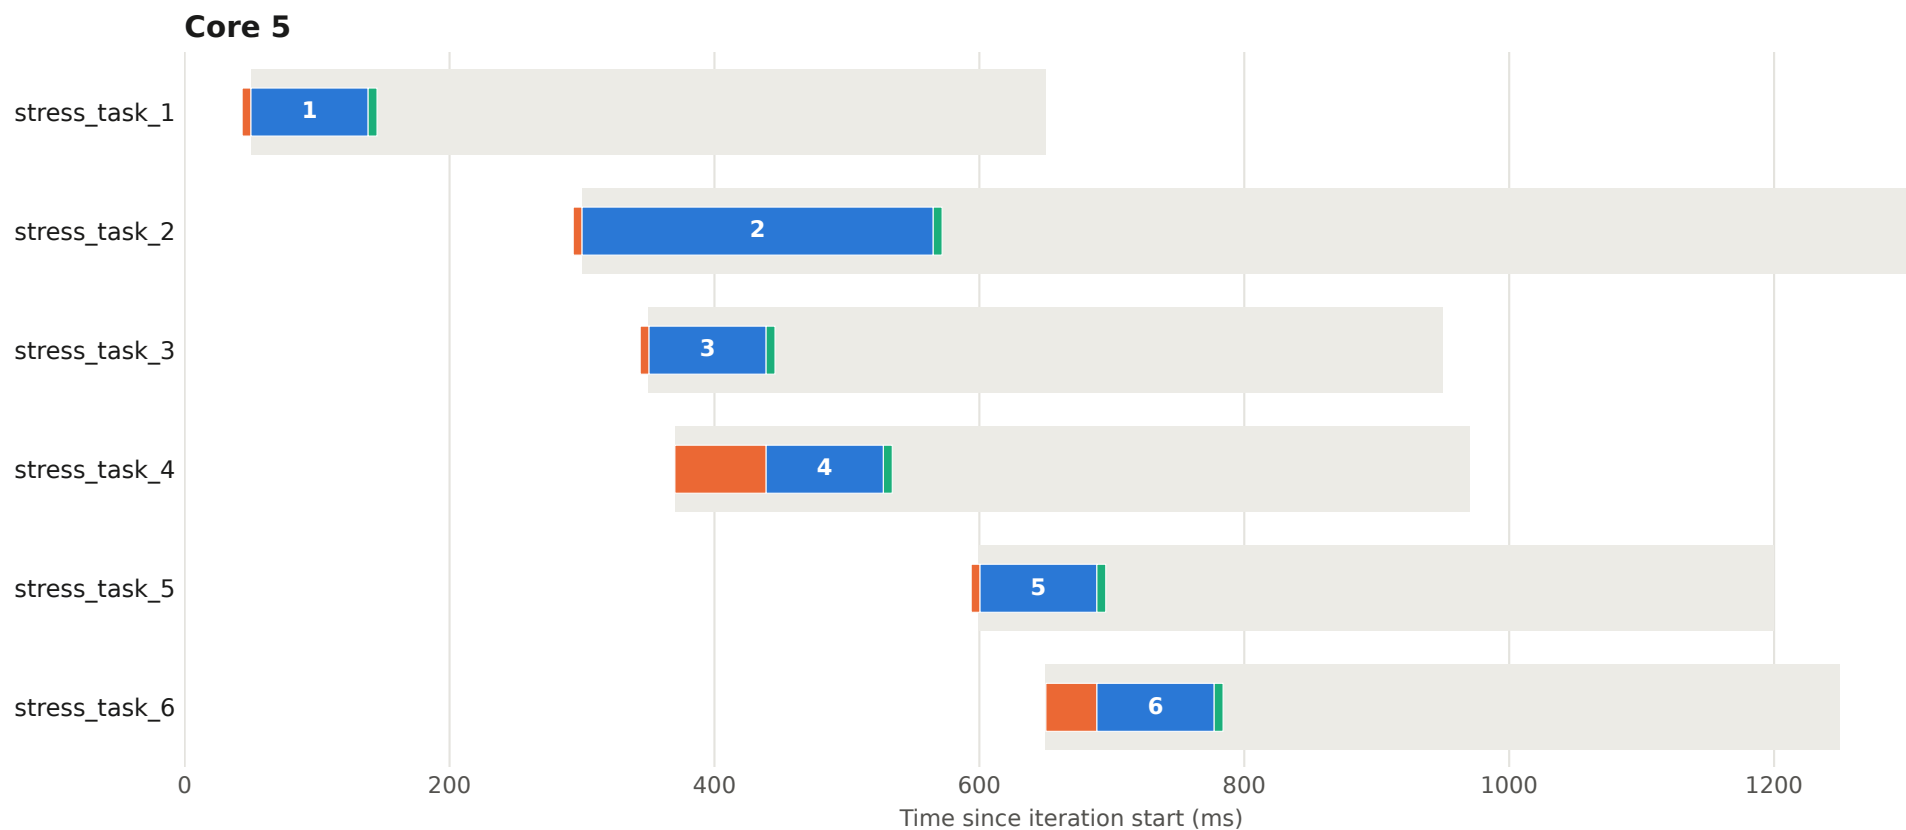


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 32 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

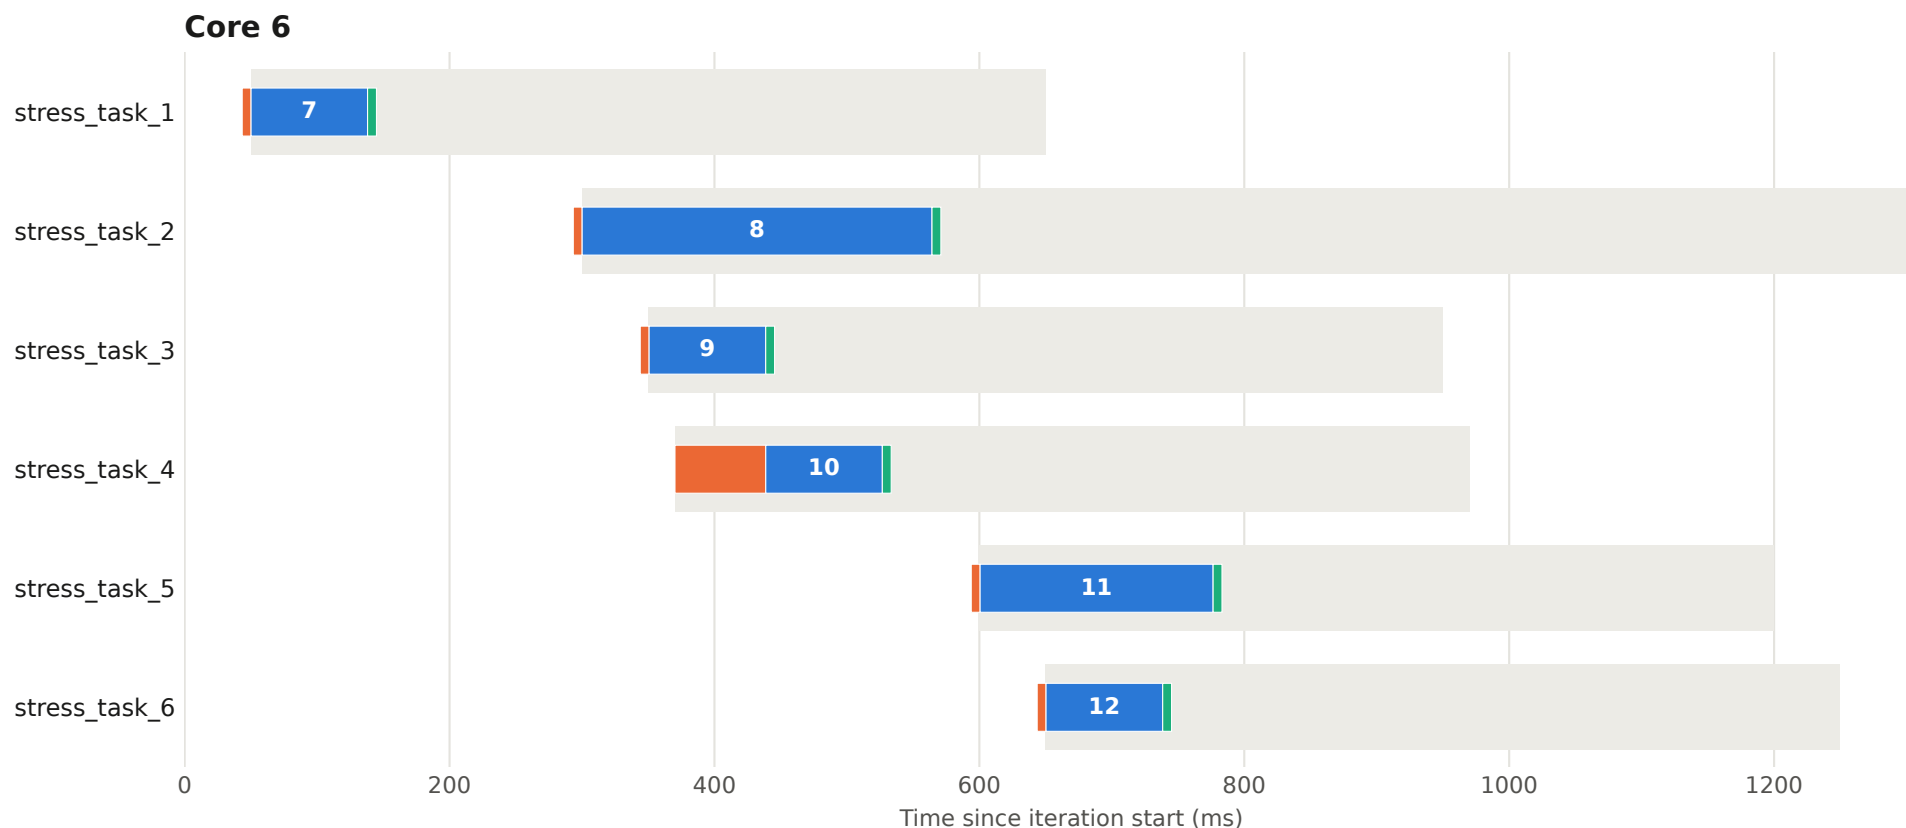


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 33 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

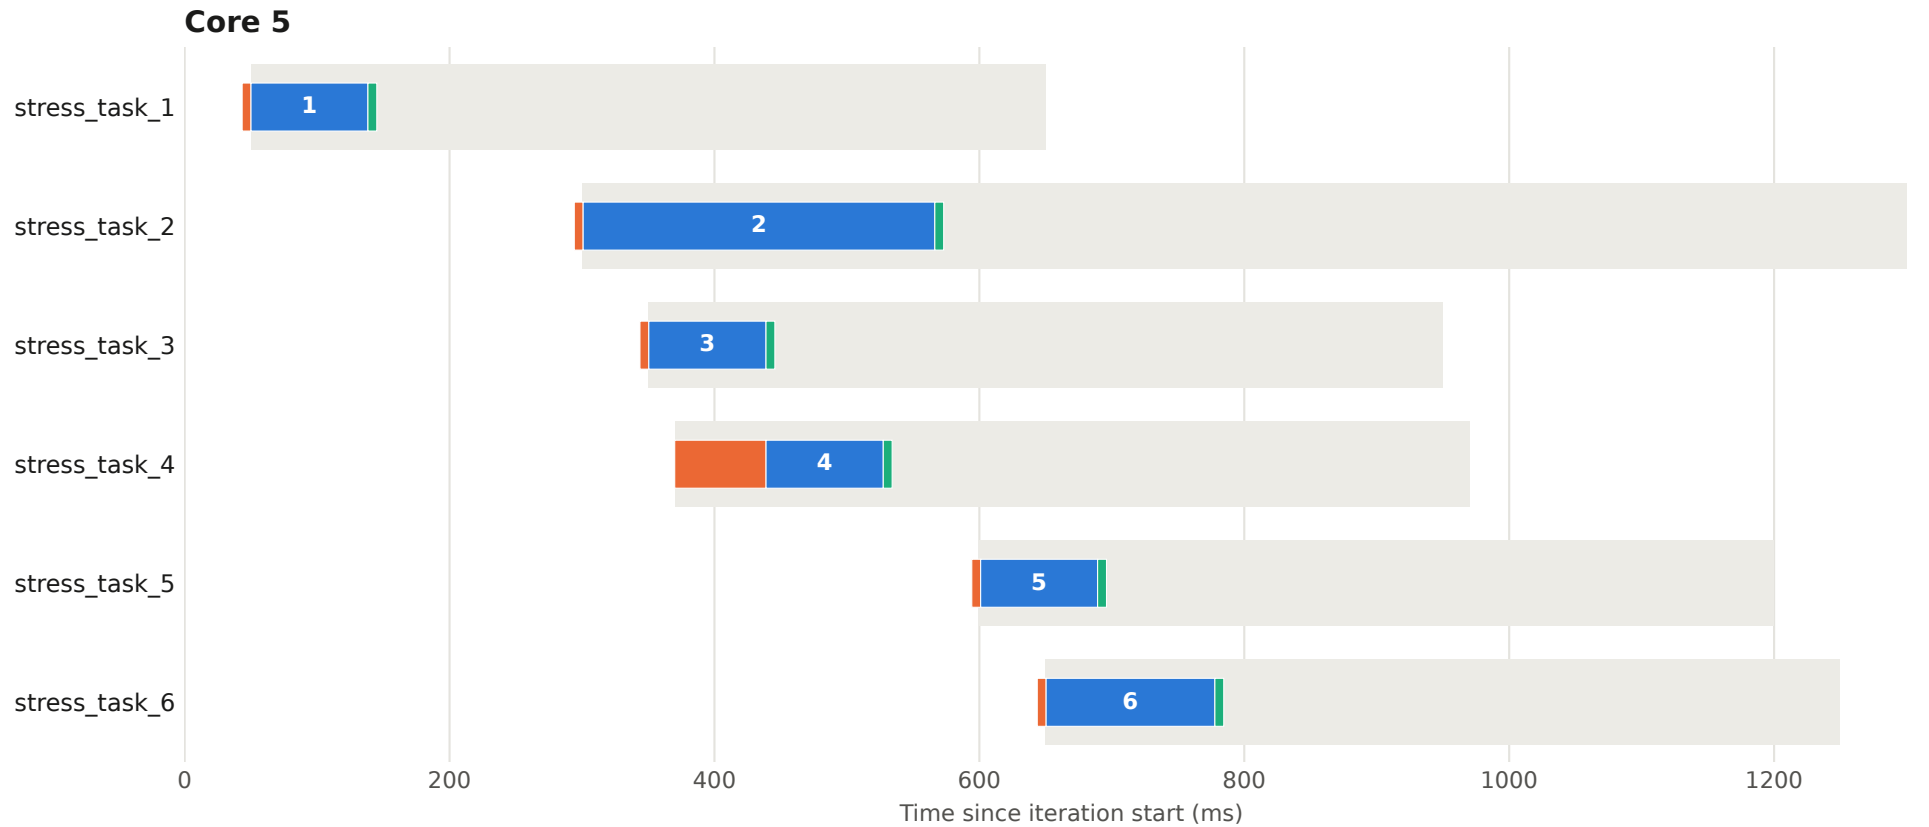


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 33 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

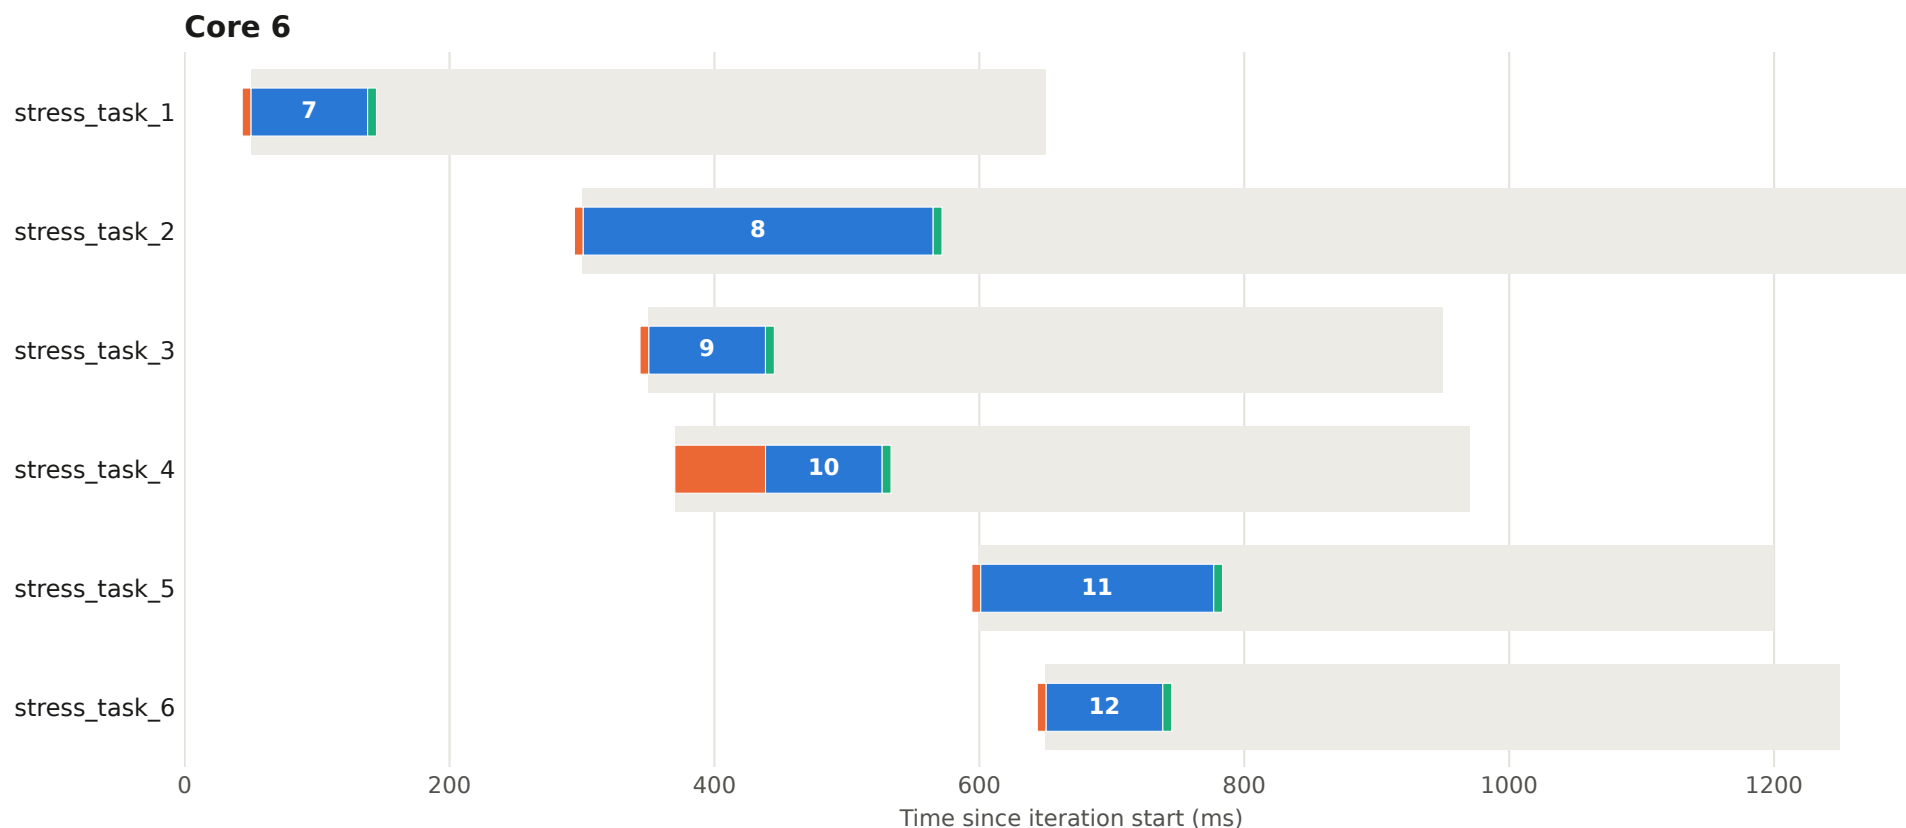


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 34 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

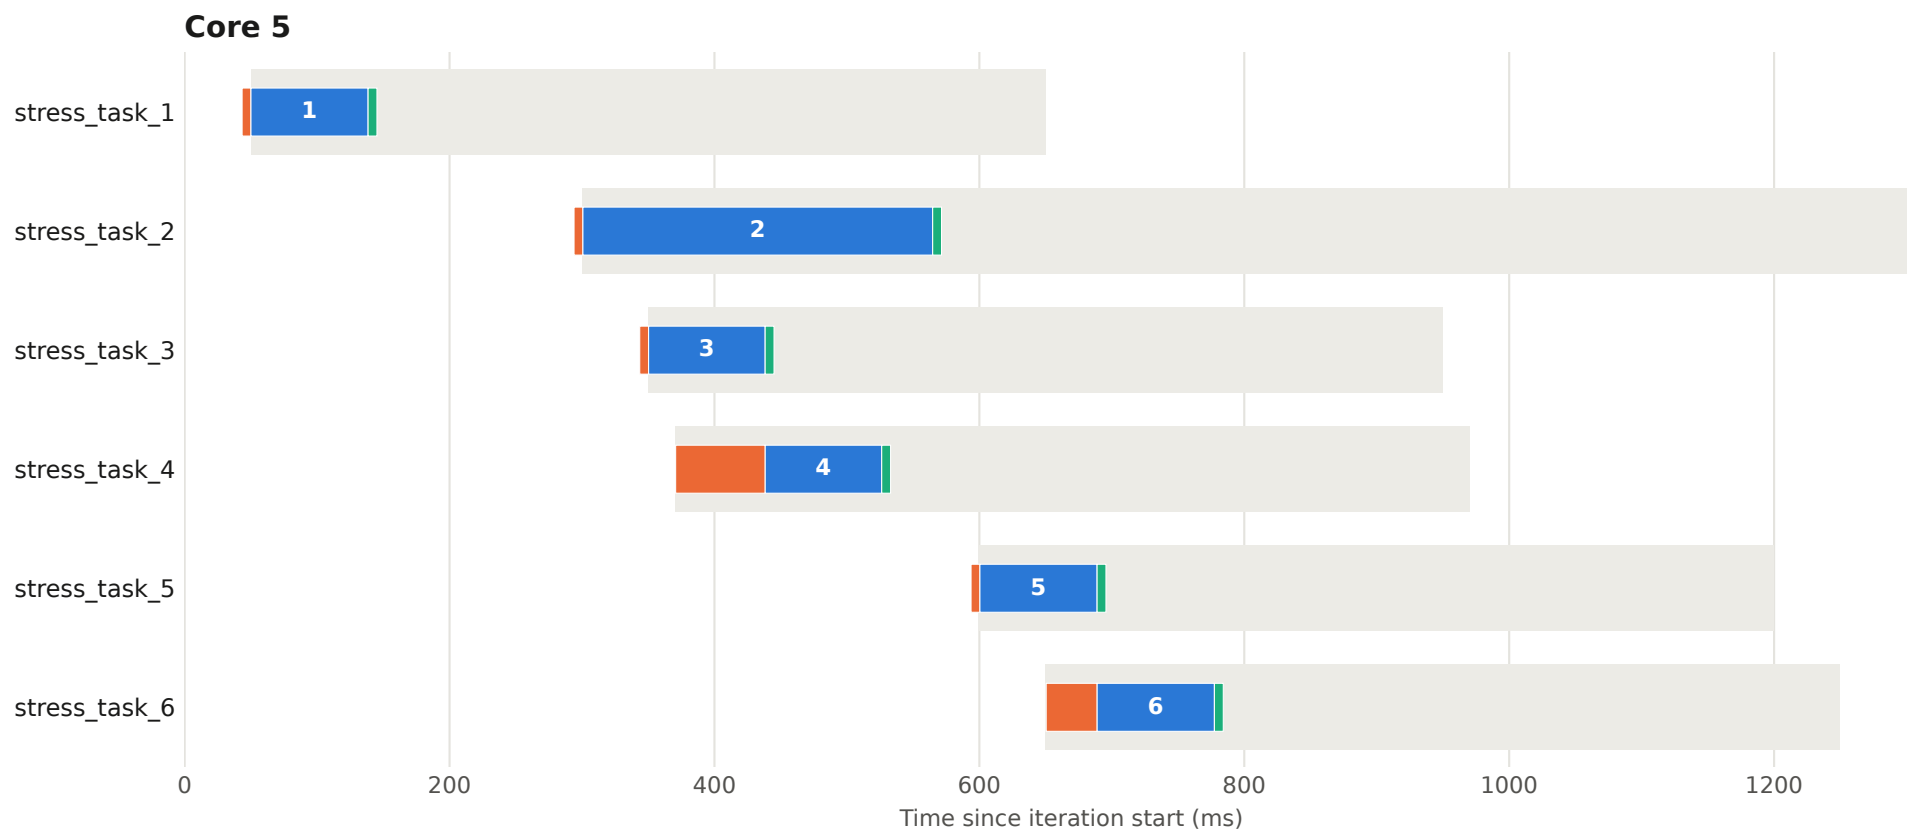


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 34 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

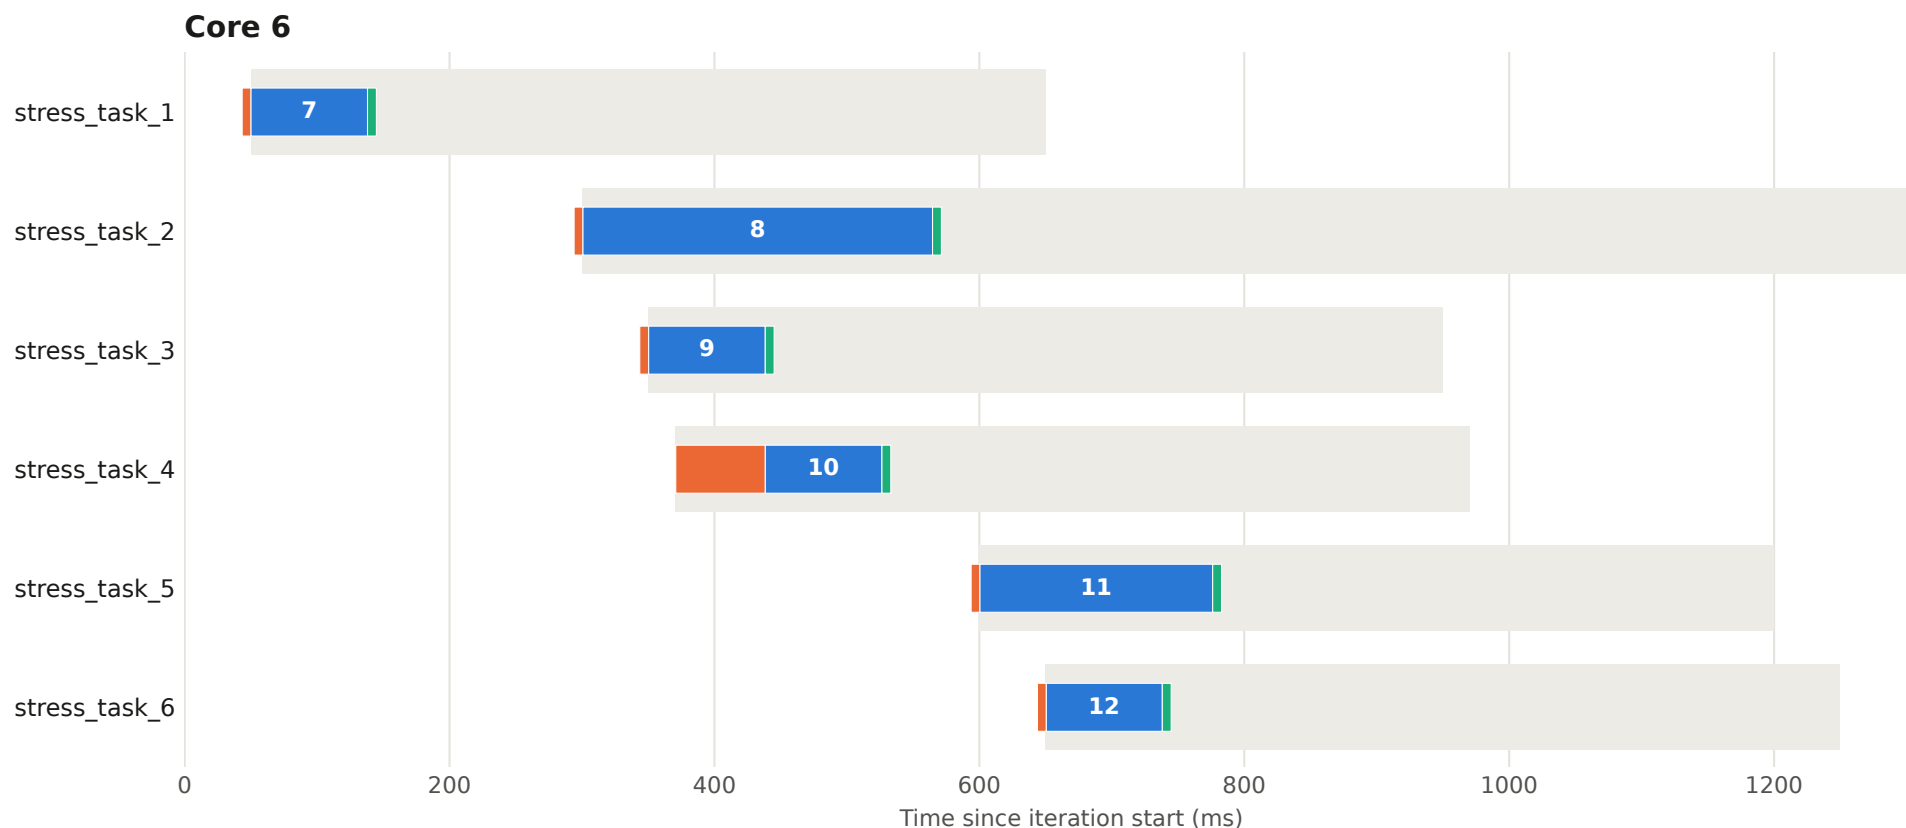


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 35 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

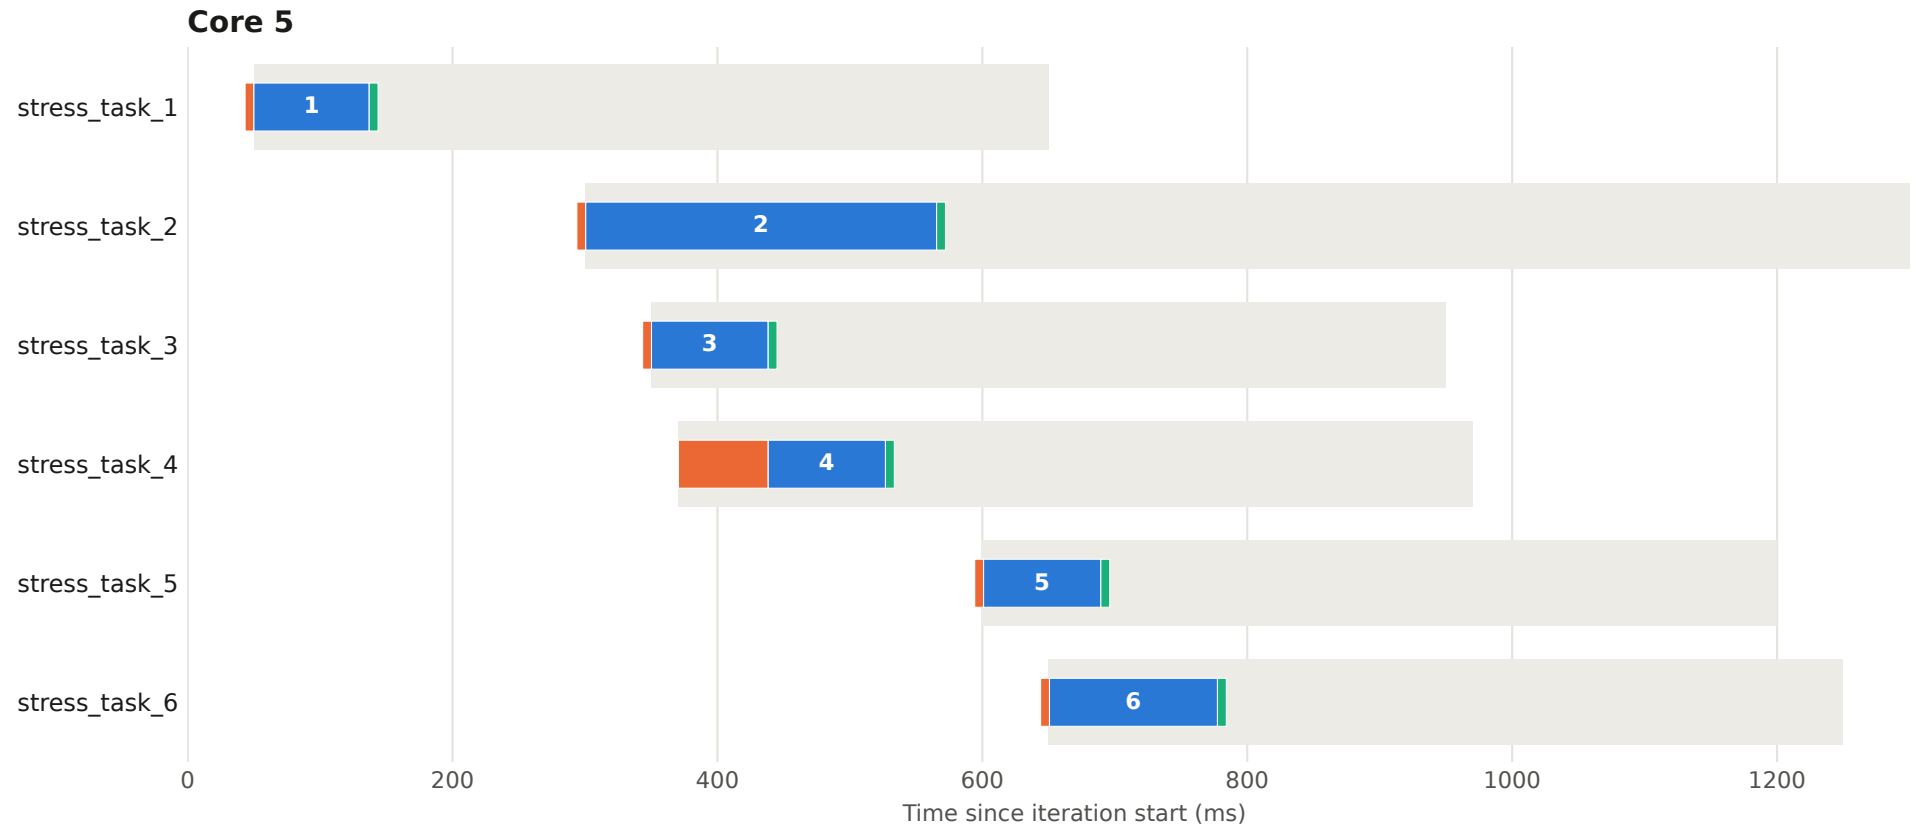


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 35 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

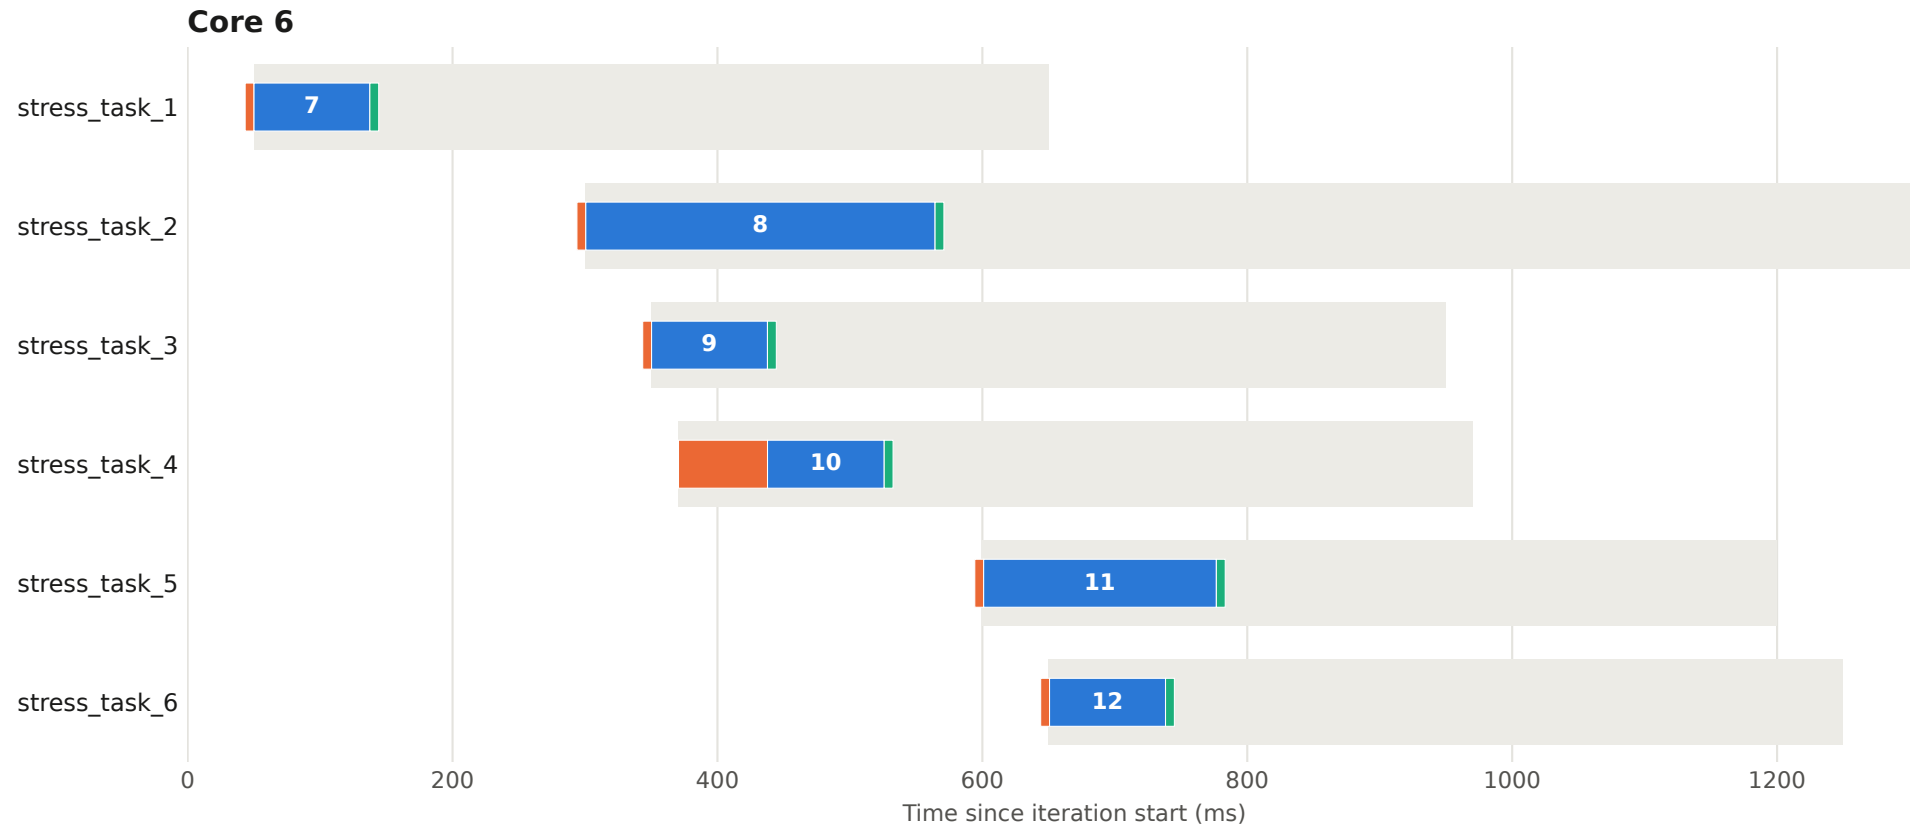


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 36 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

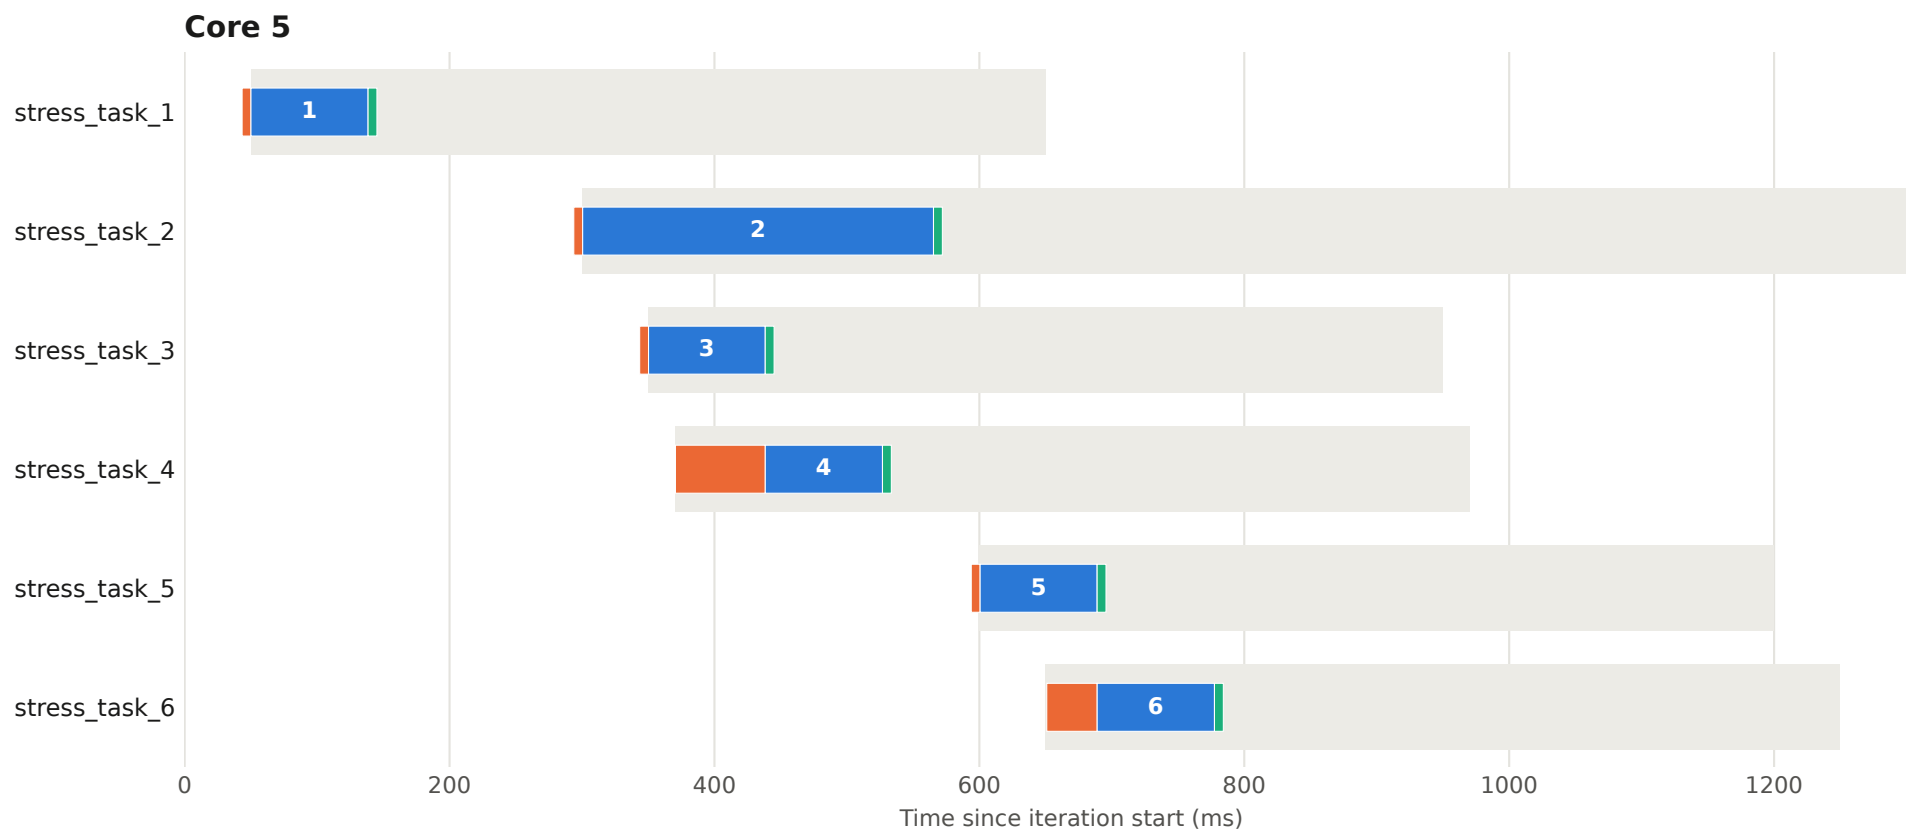


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 36 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

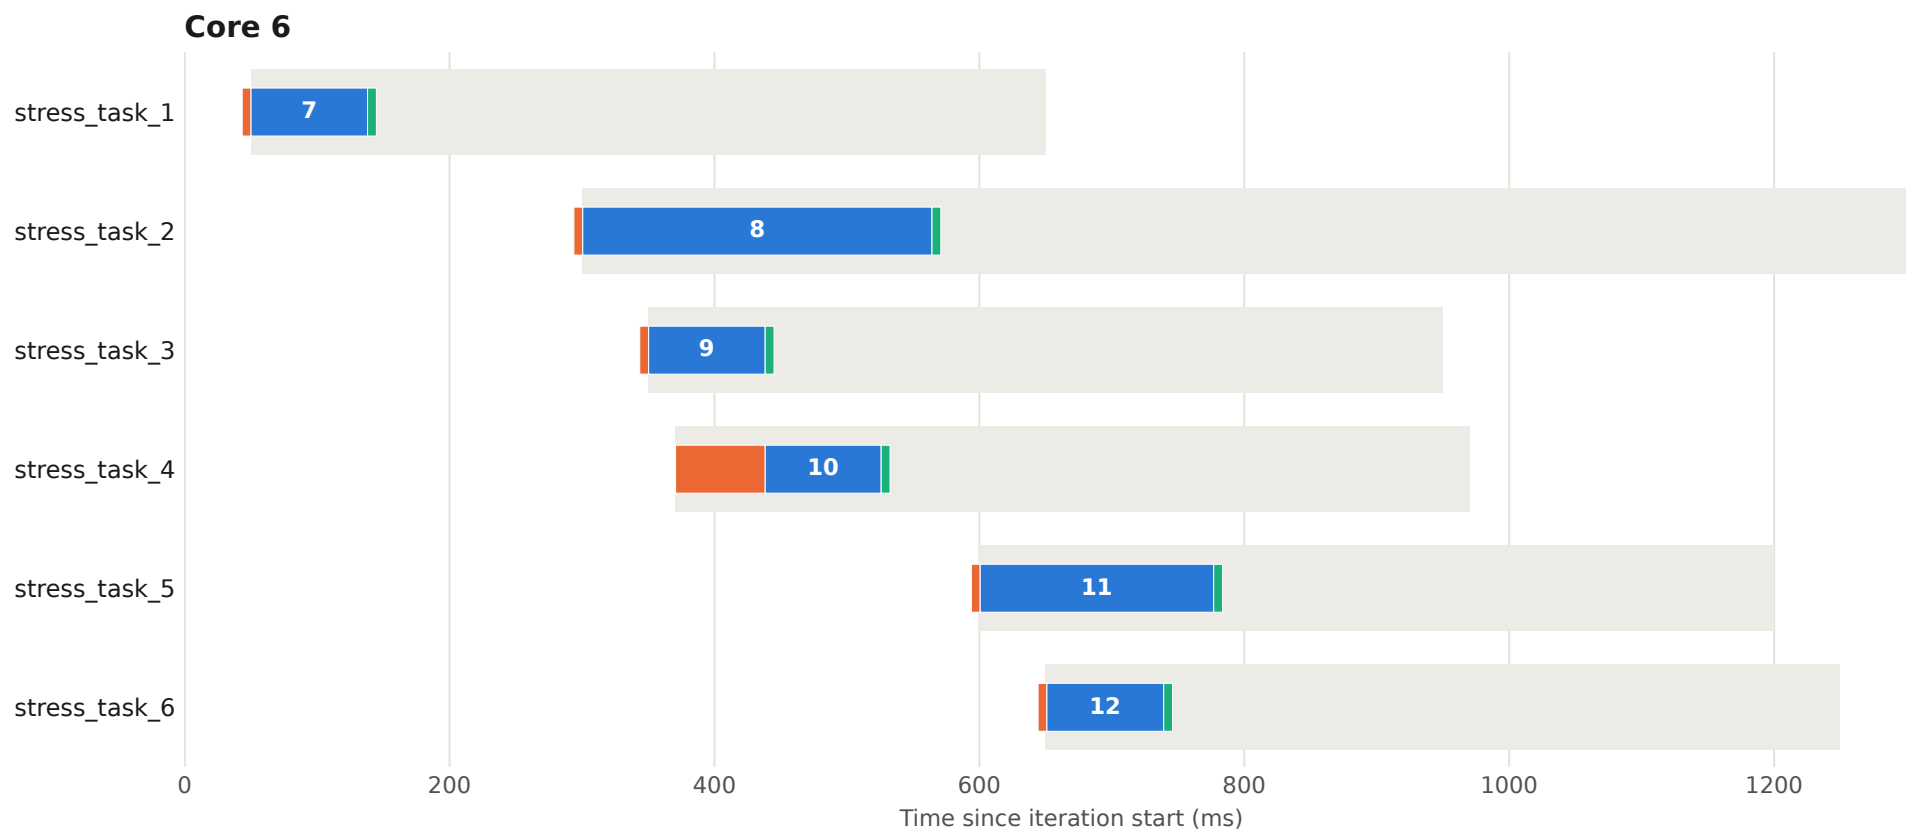


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 37 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

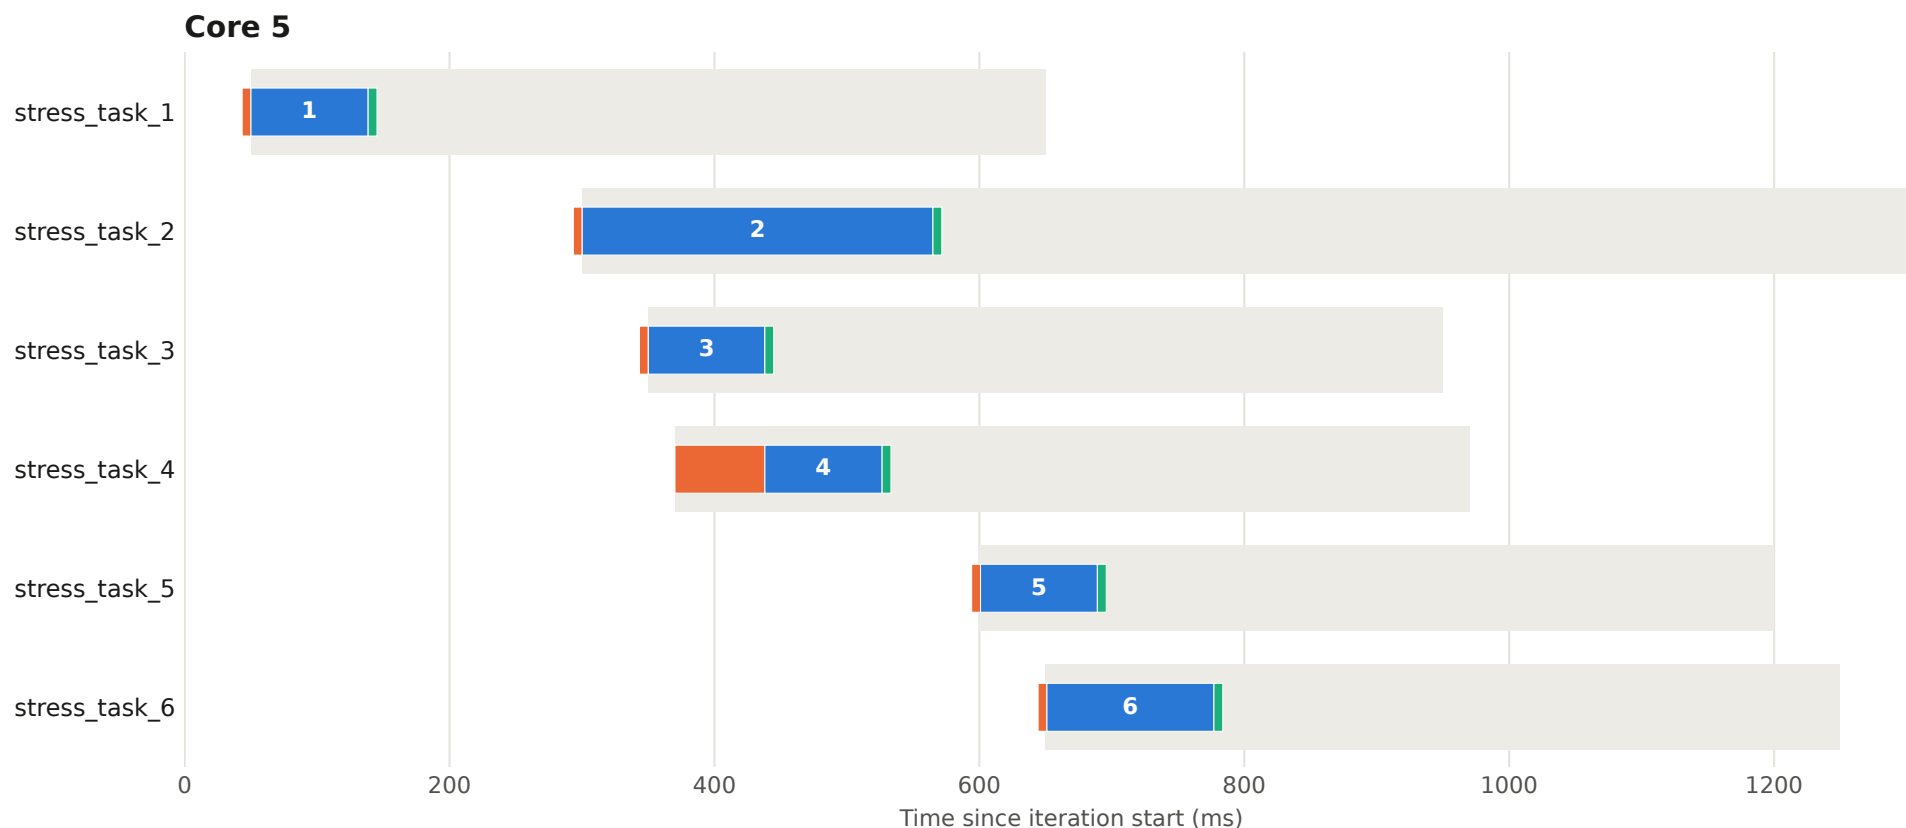


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 37 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

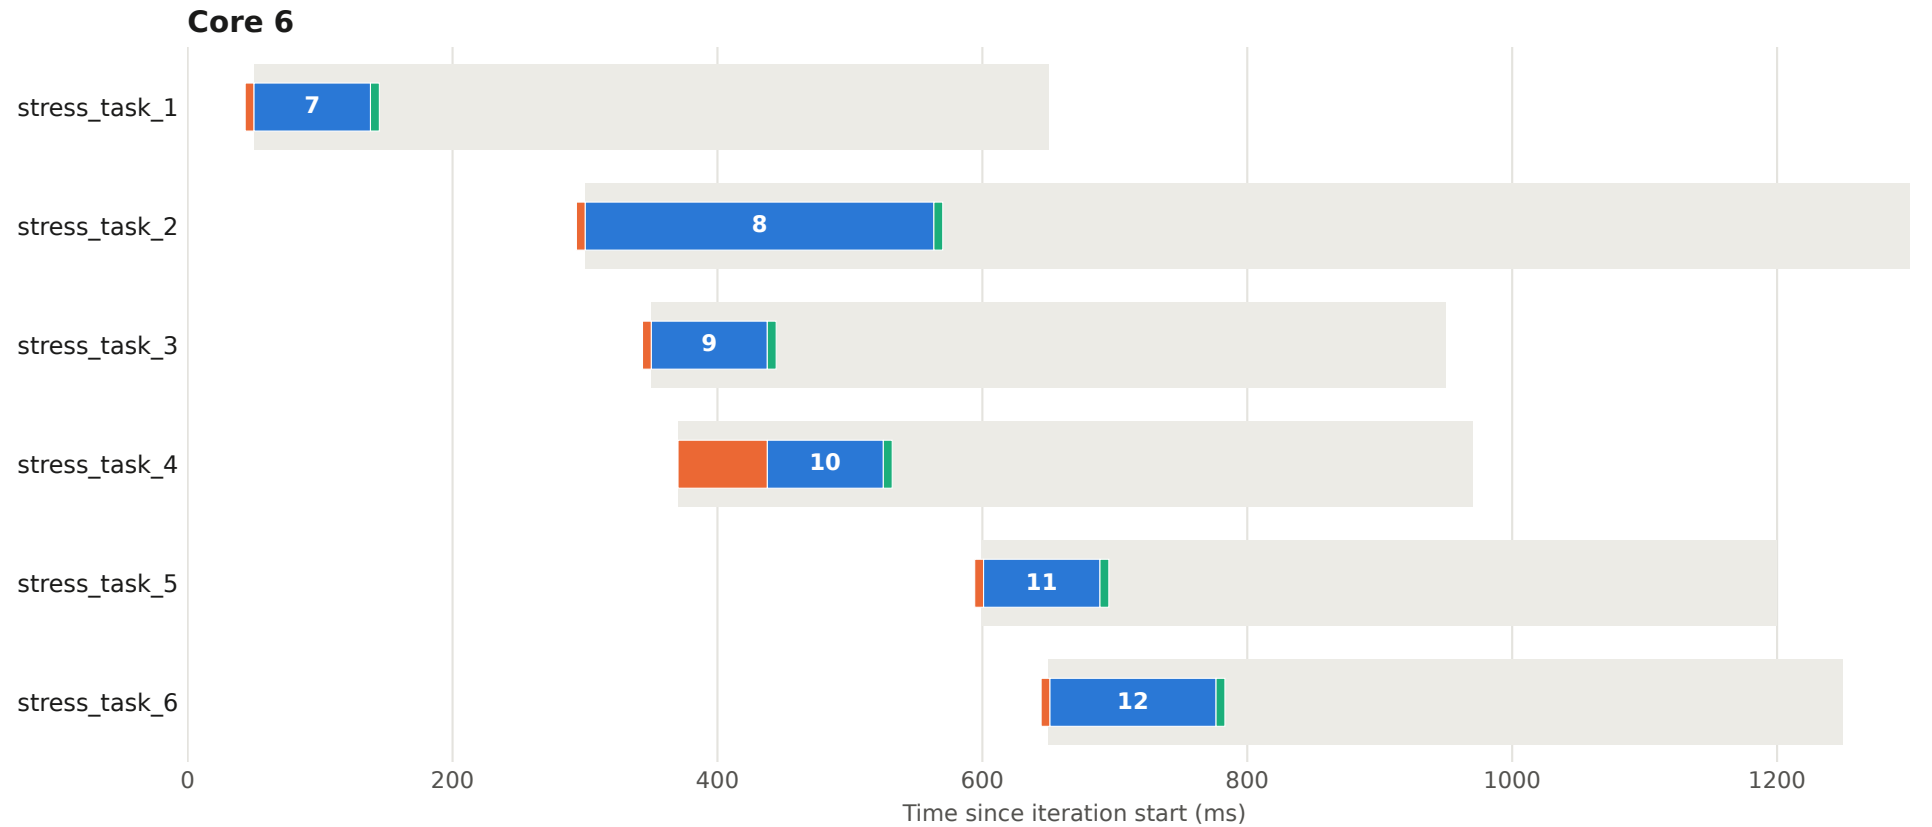


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 38 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

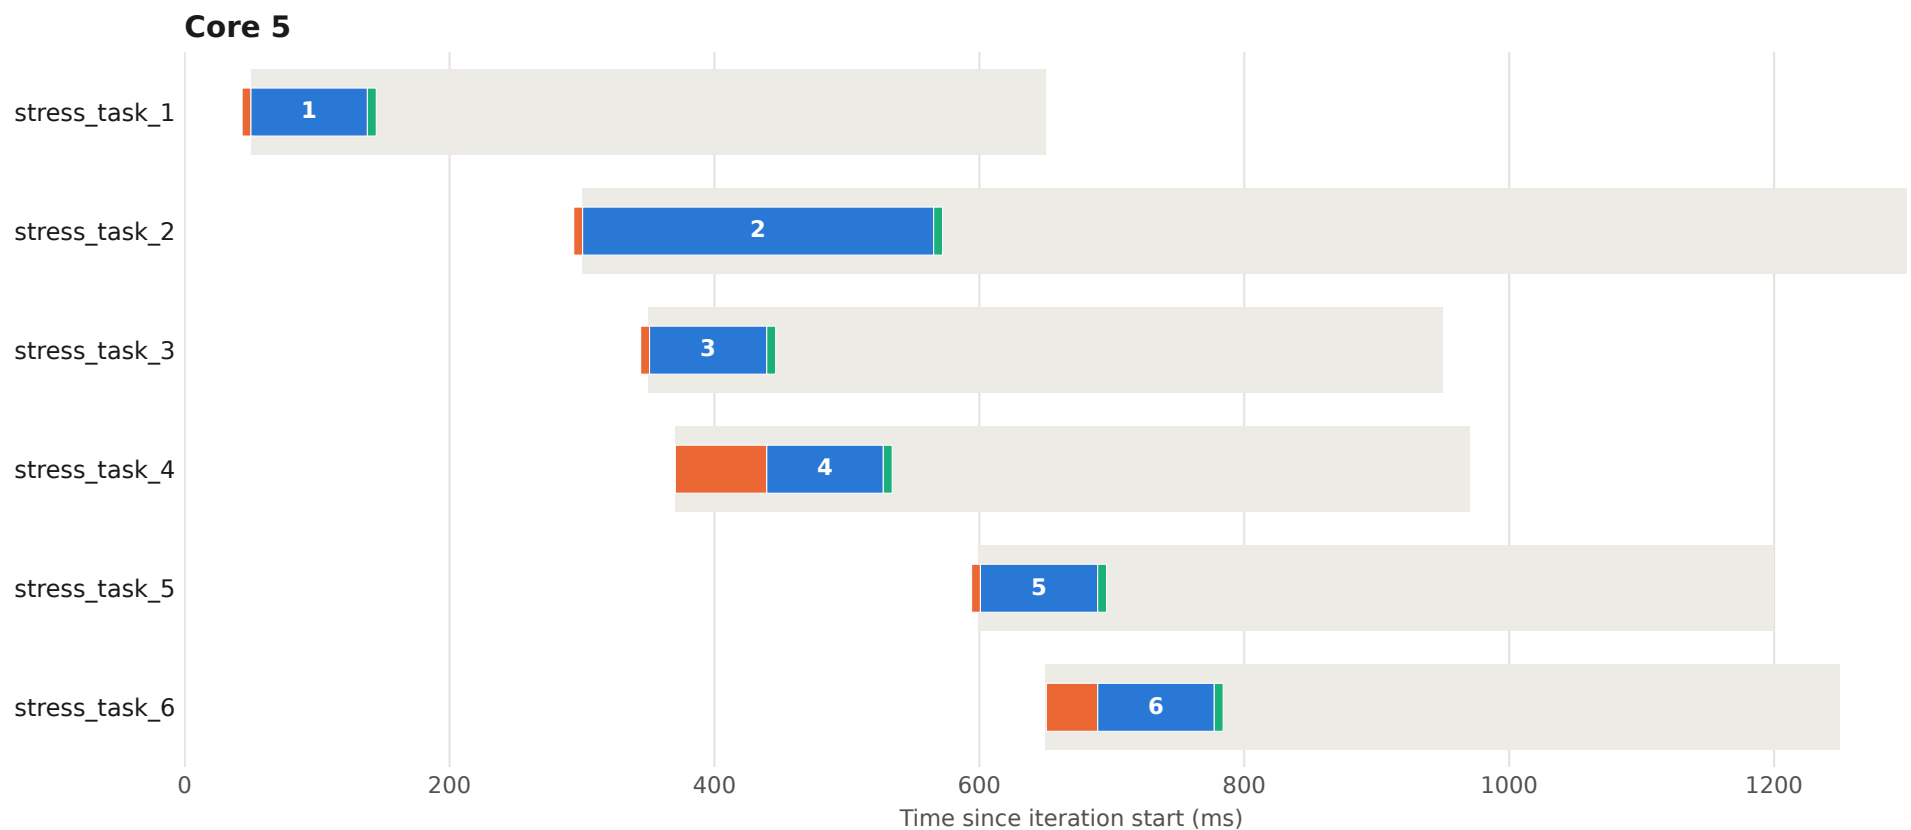


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 38 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

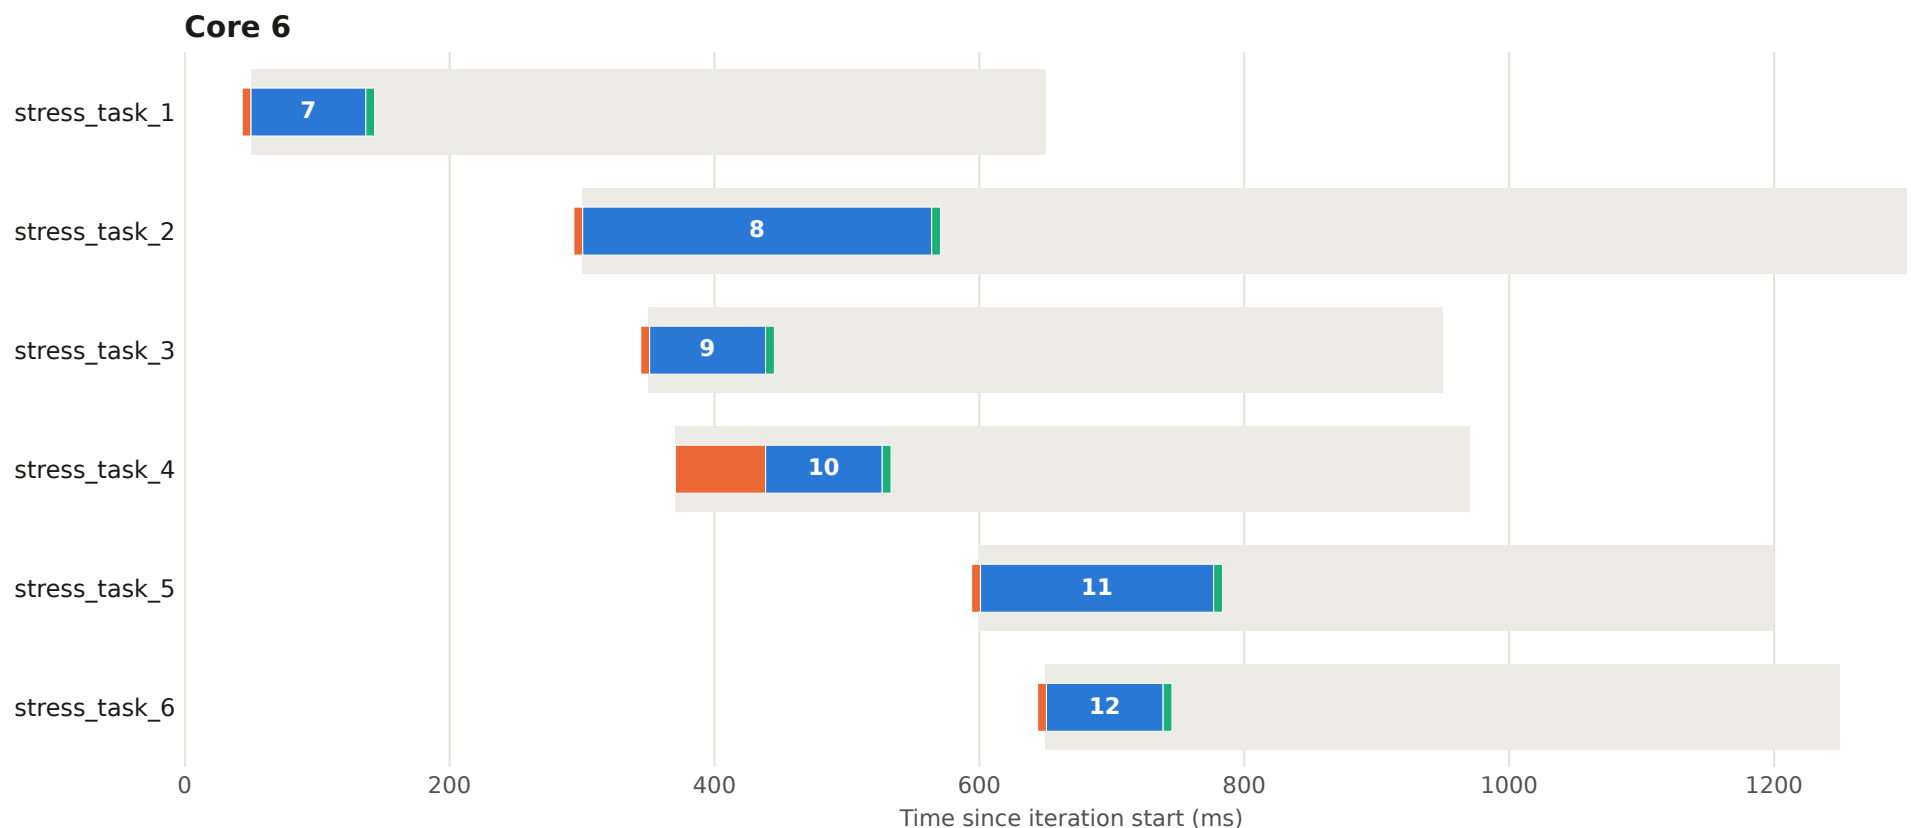


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 39 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

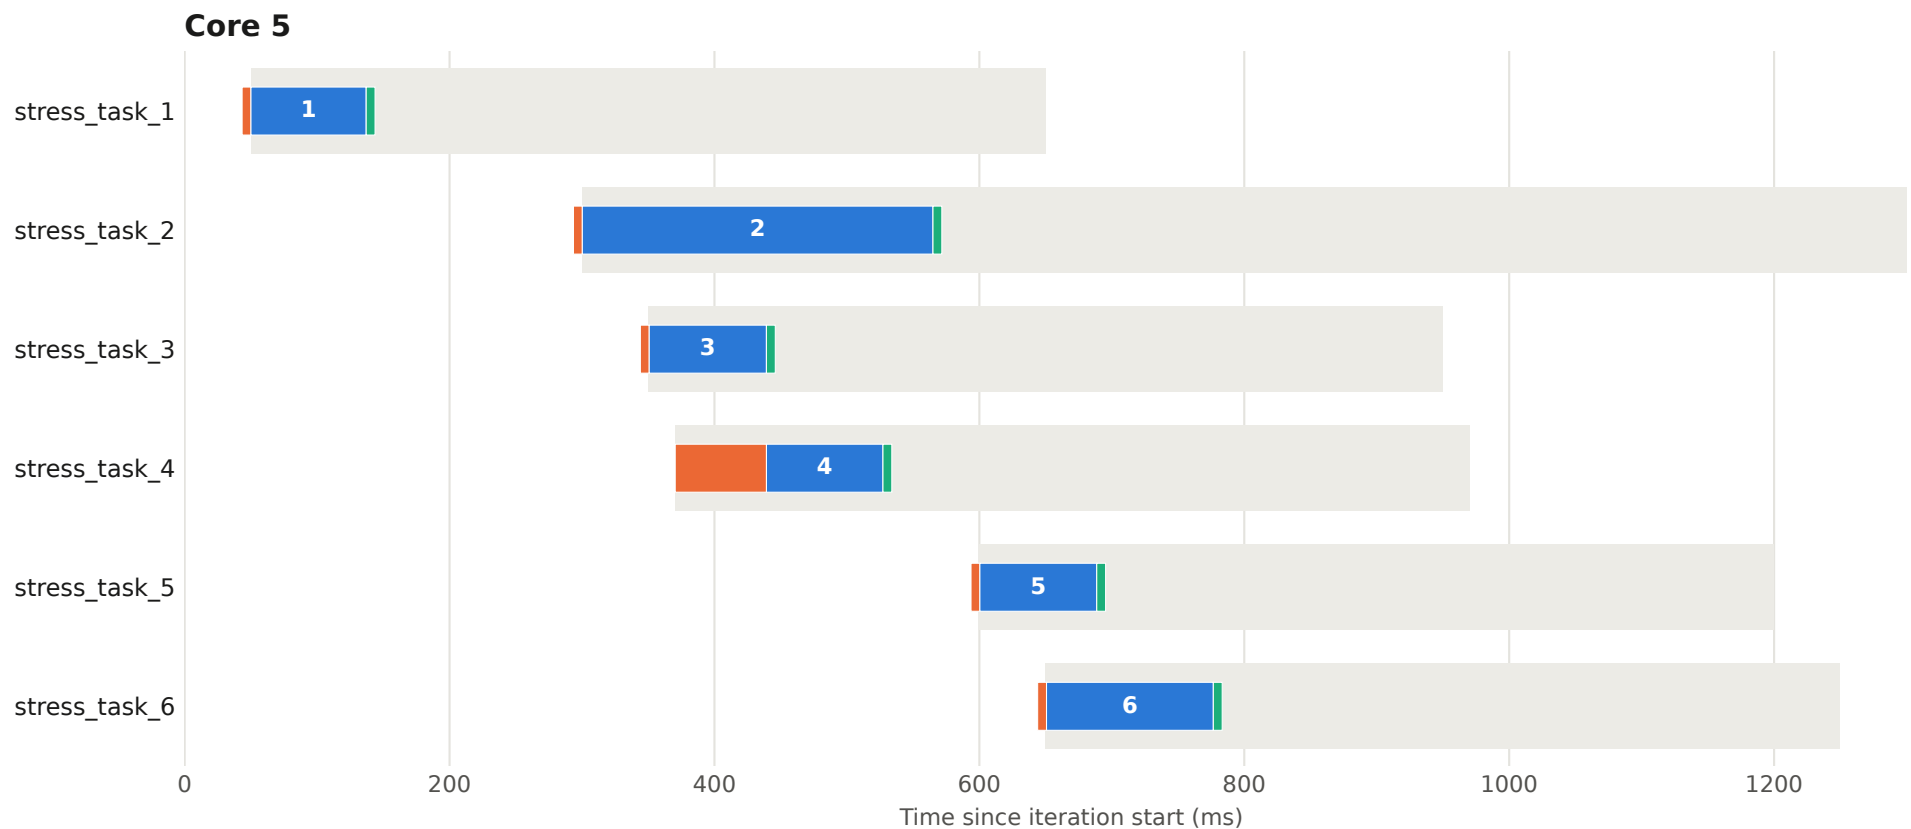


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 39 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

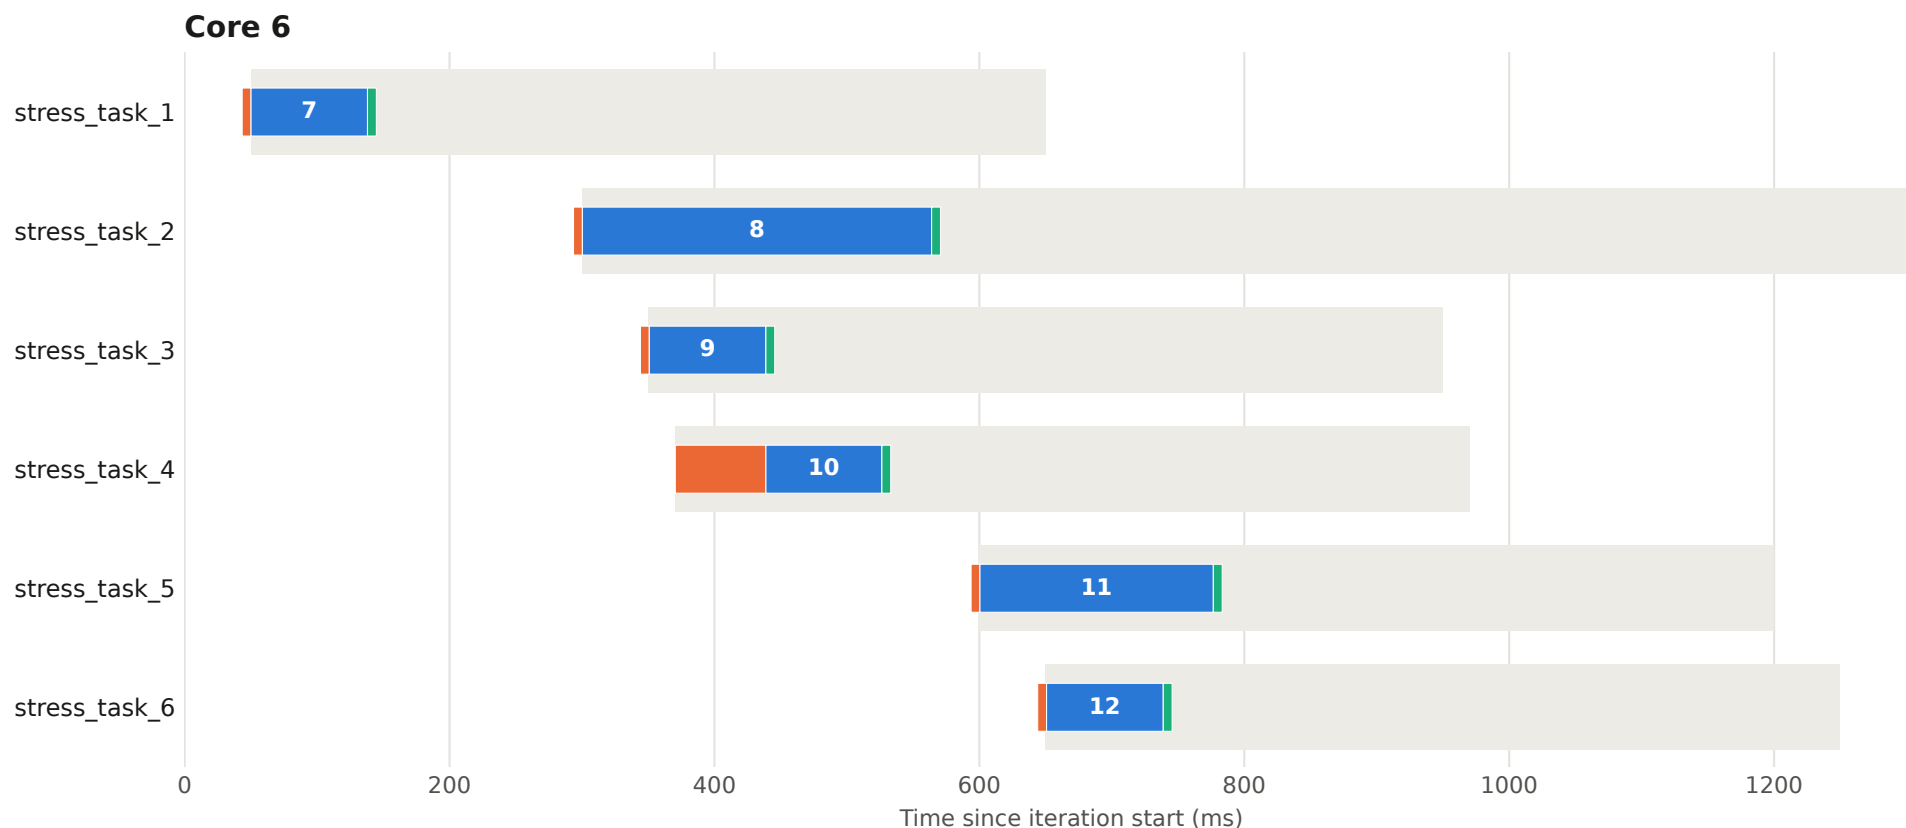


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 40 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

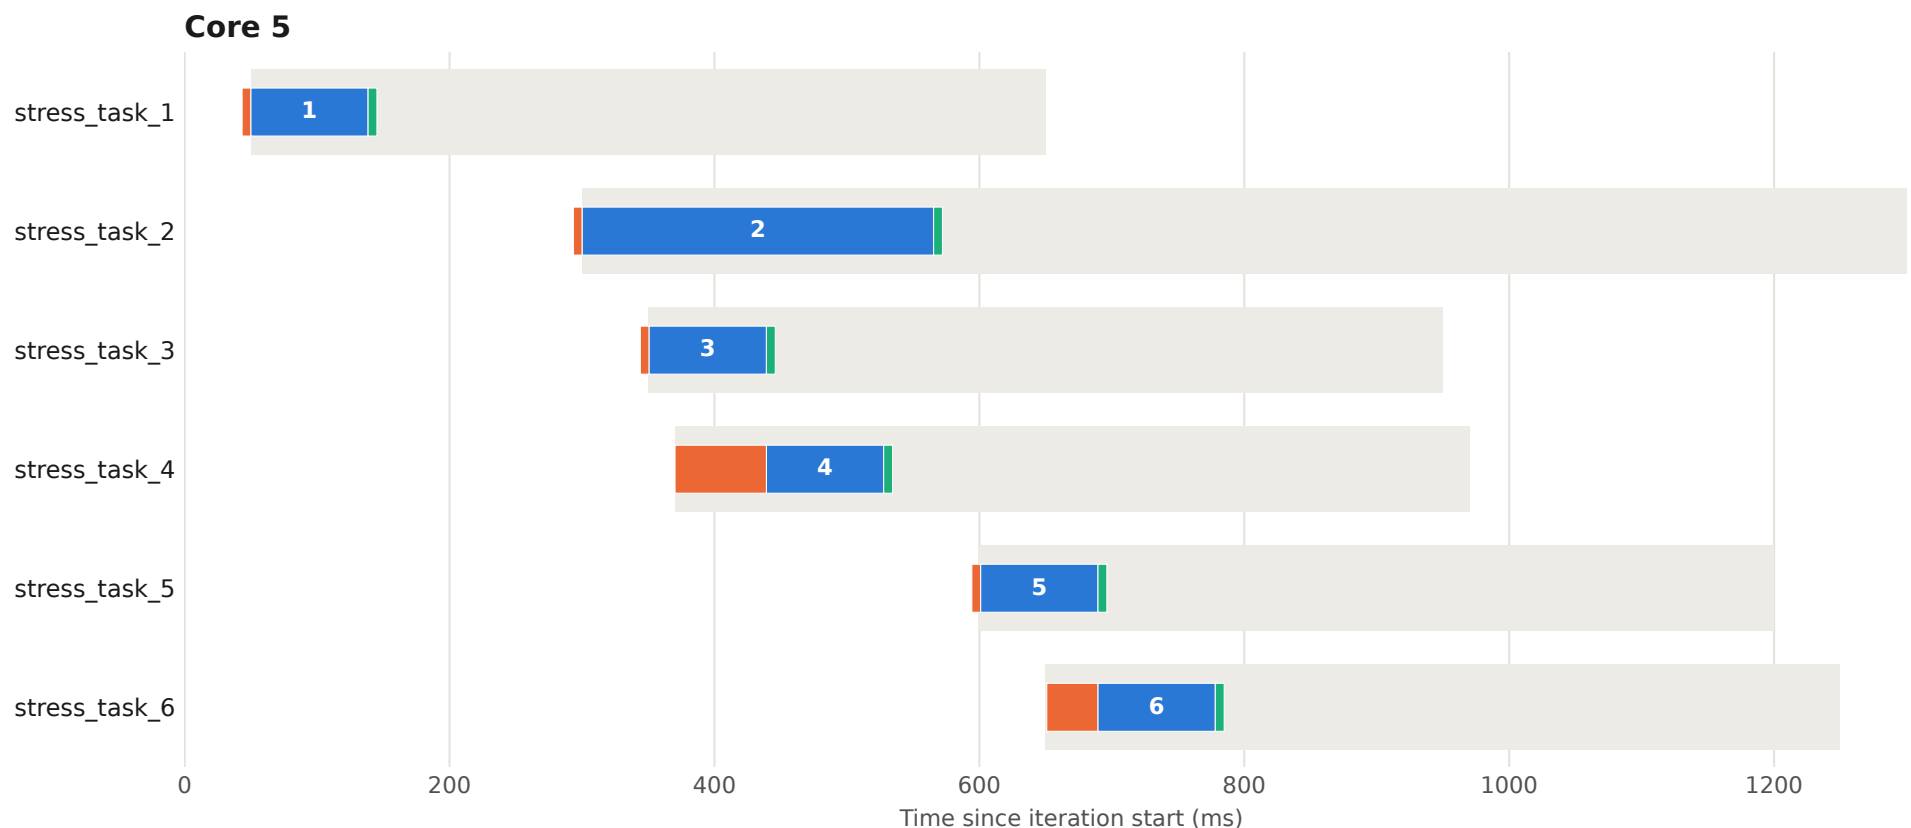


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 40 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

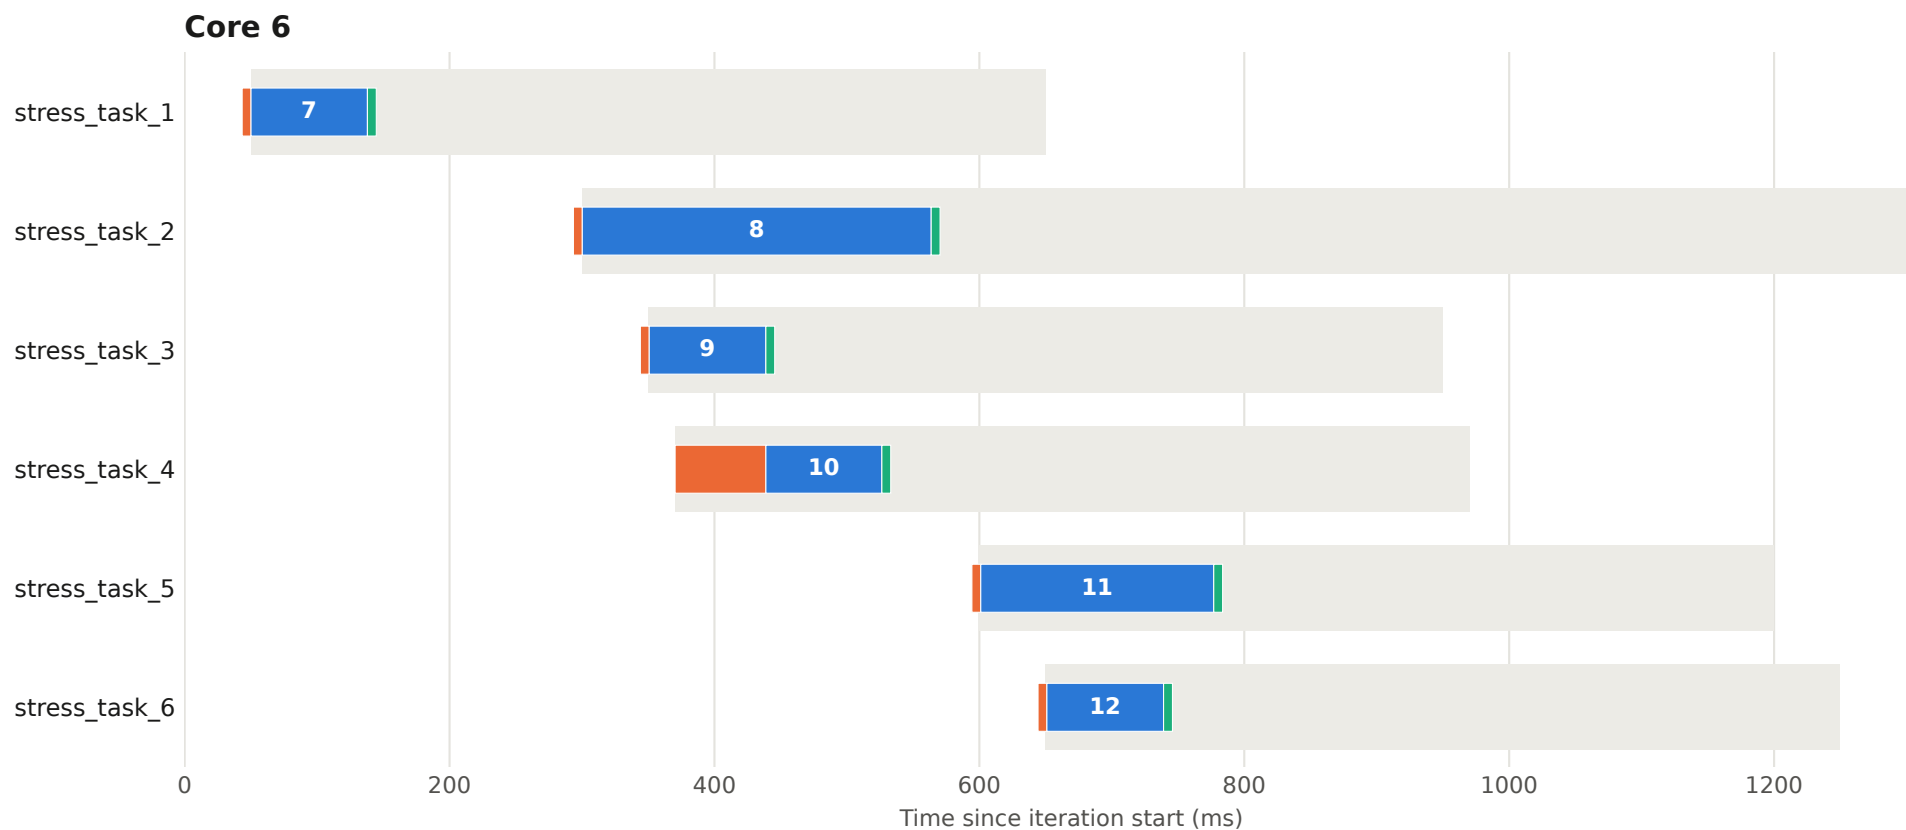


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 41 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

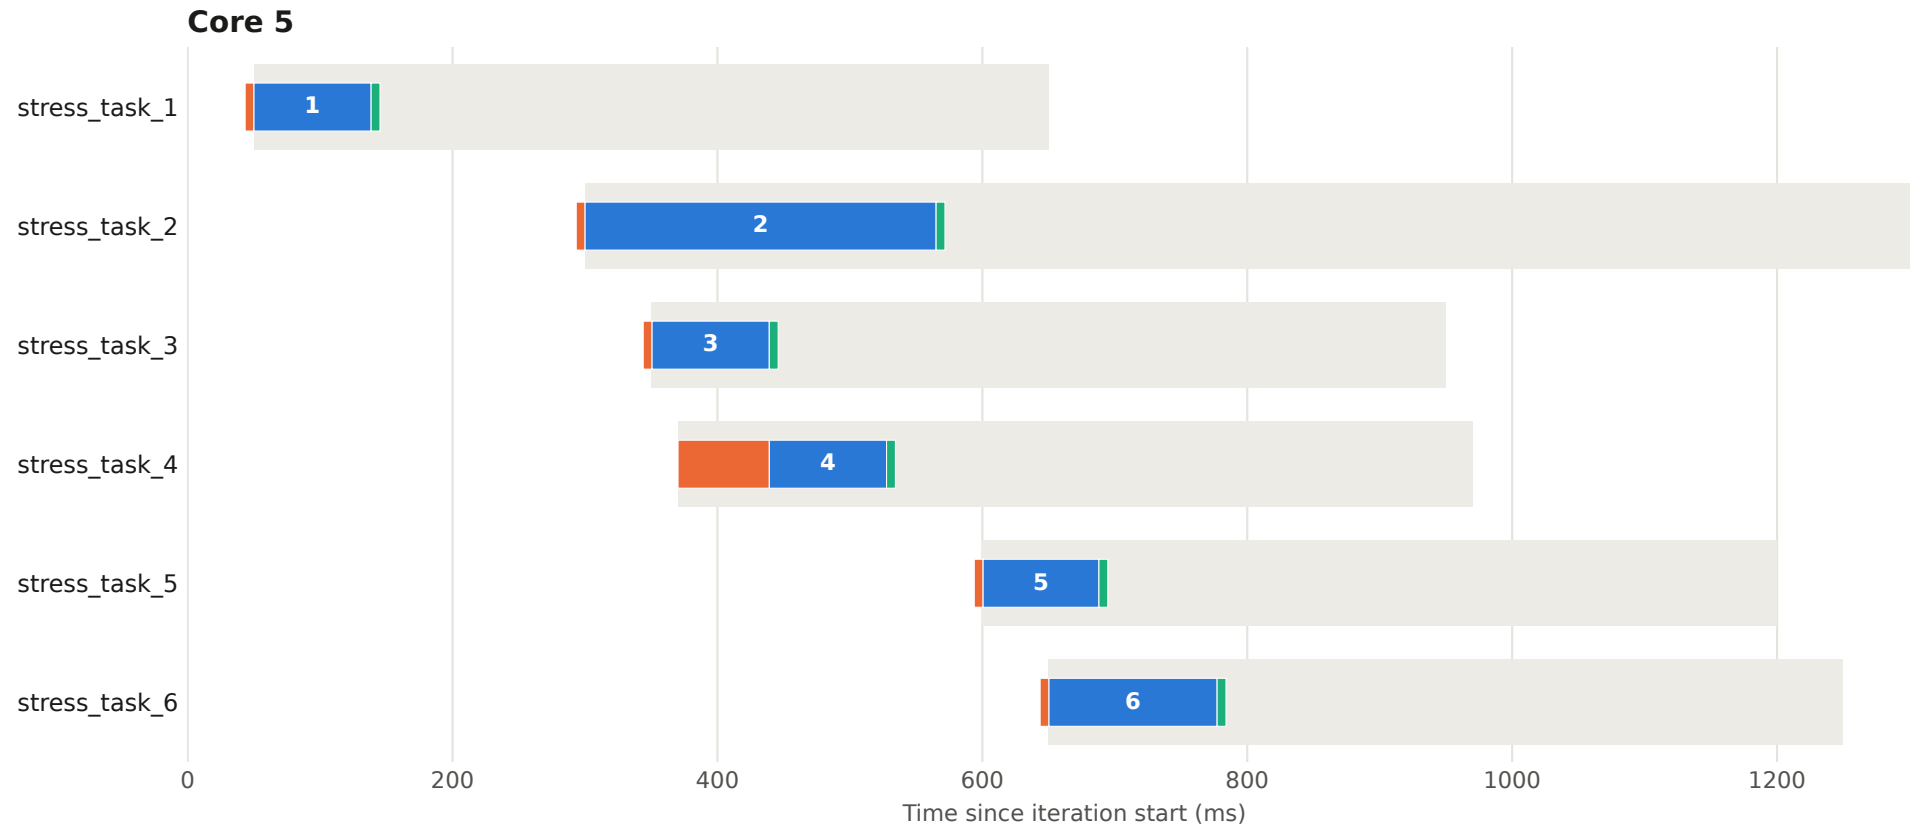


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 41 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

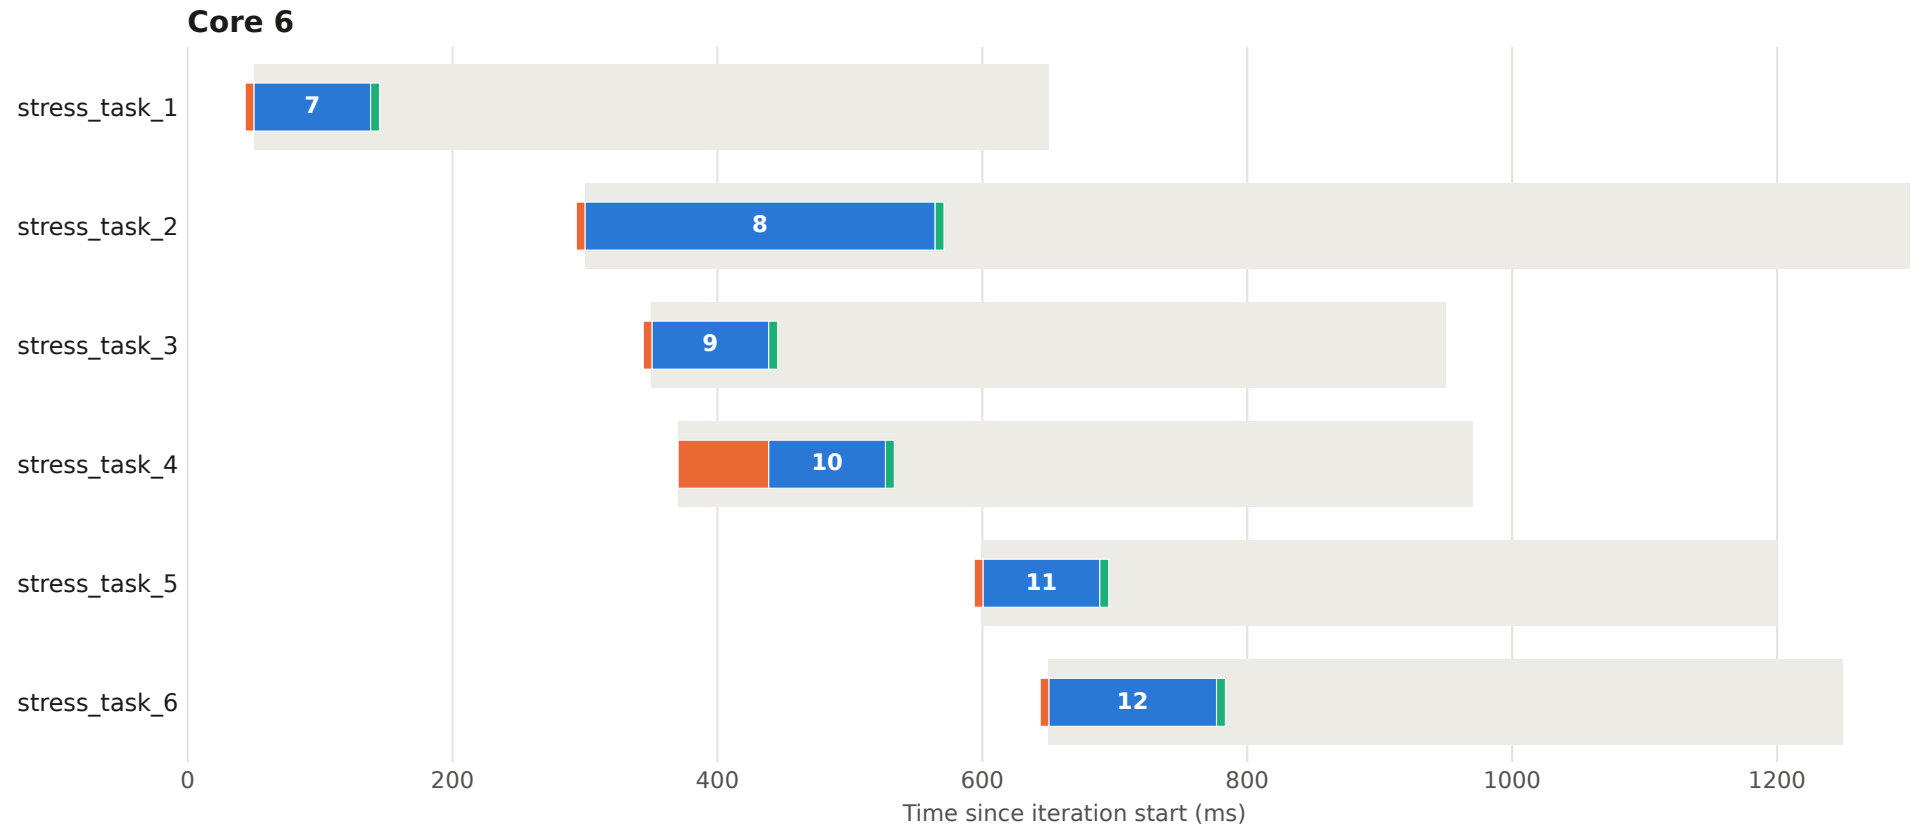


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 42 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

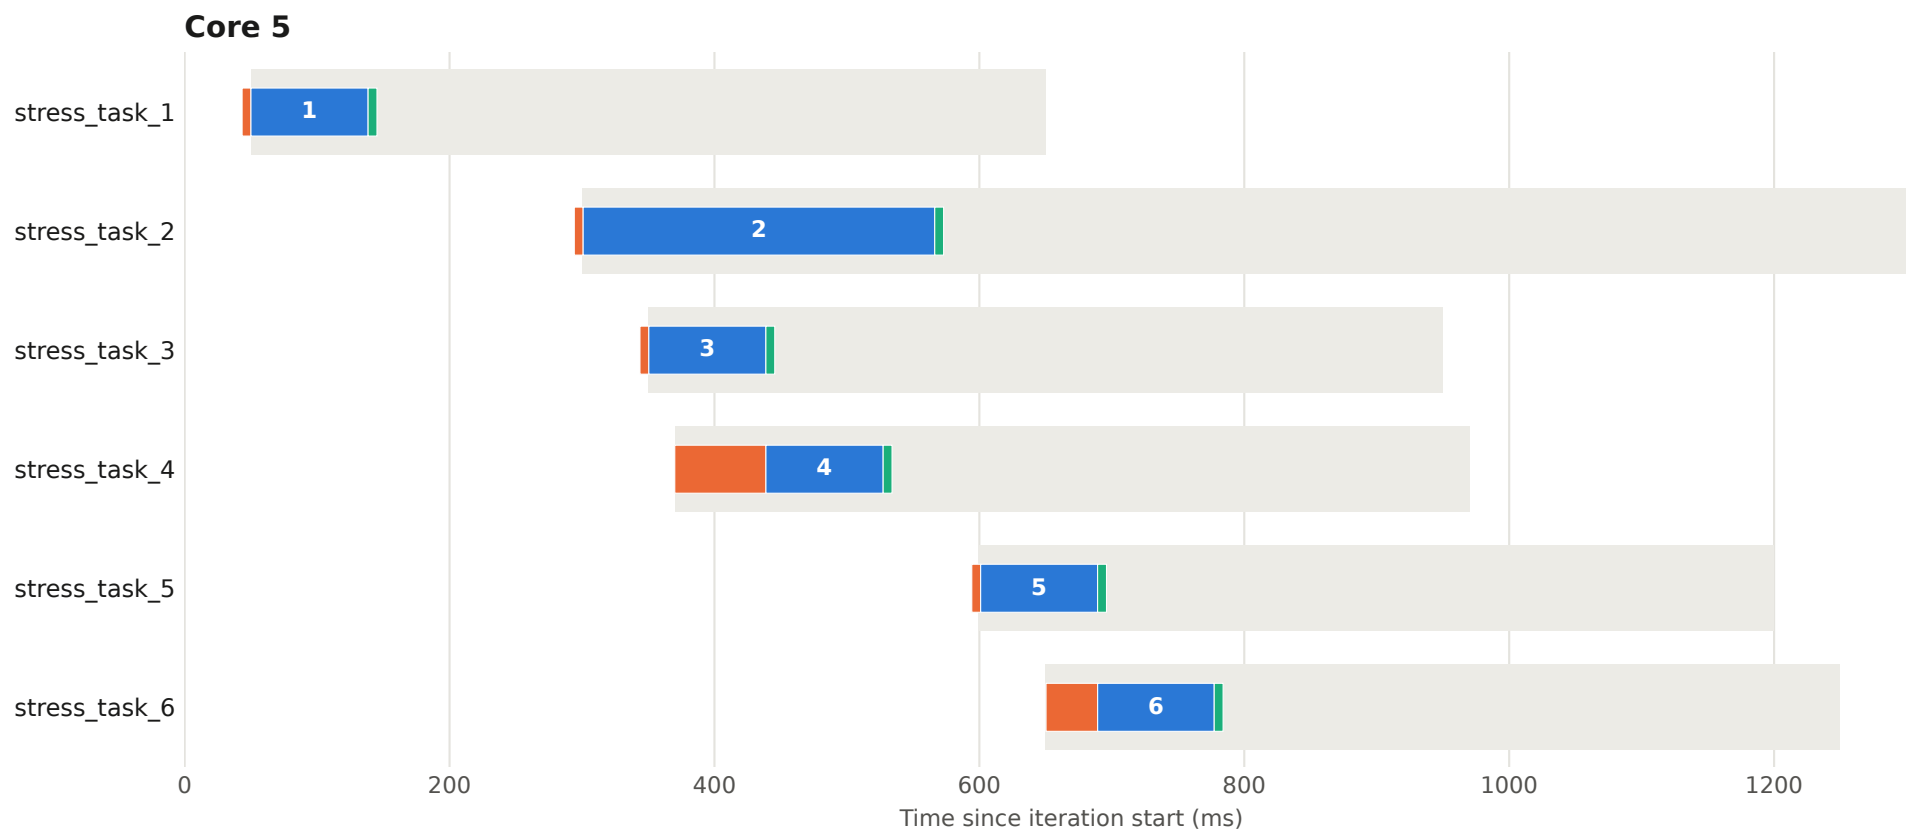


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 42 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

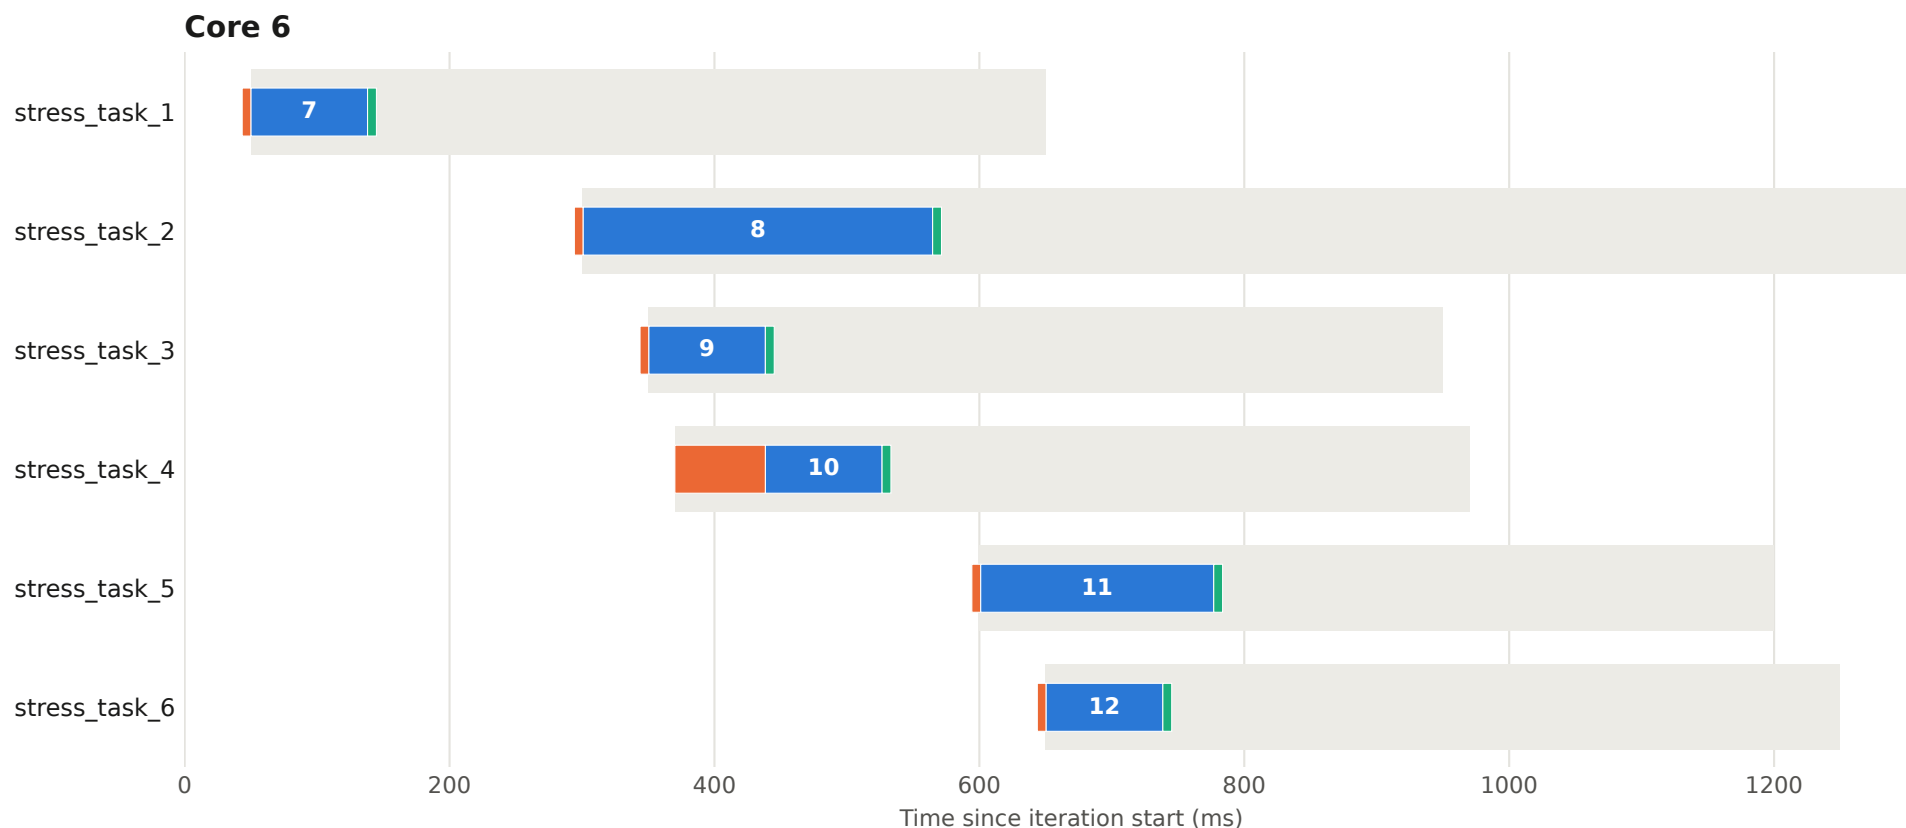


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 43 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

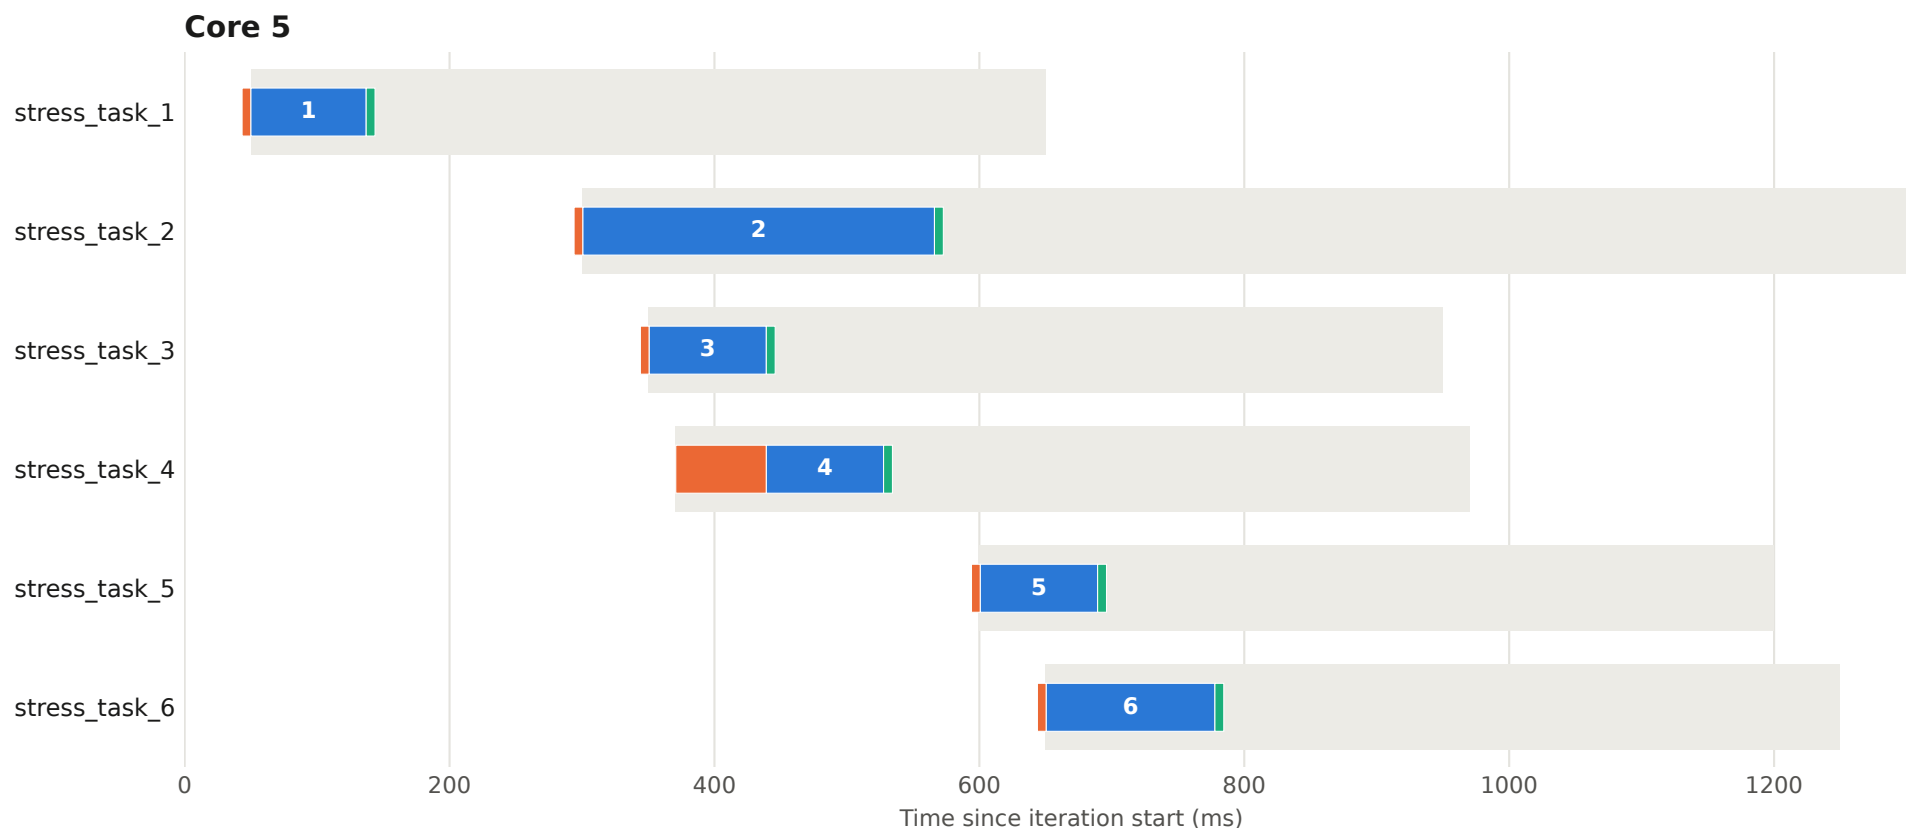


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 43 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

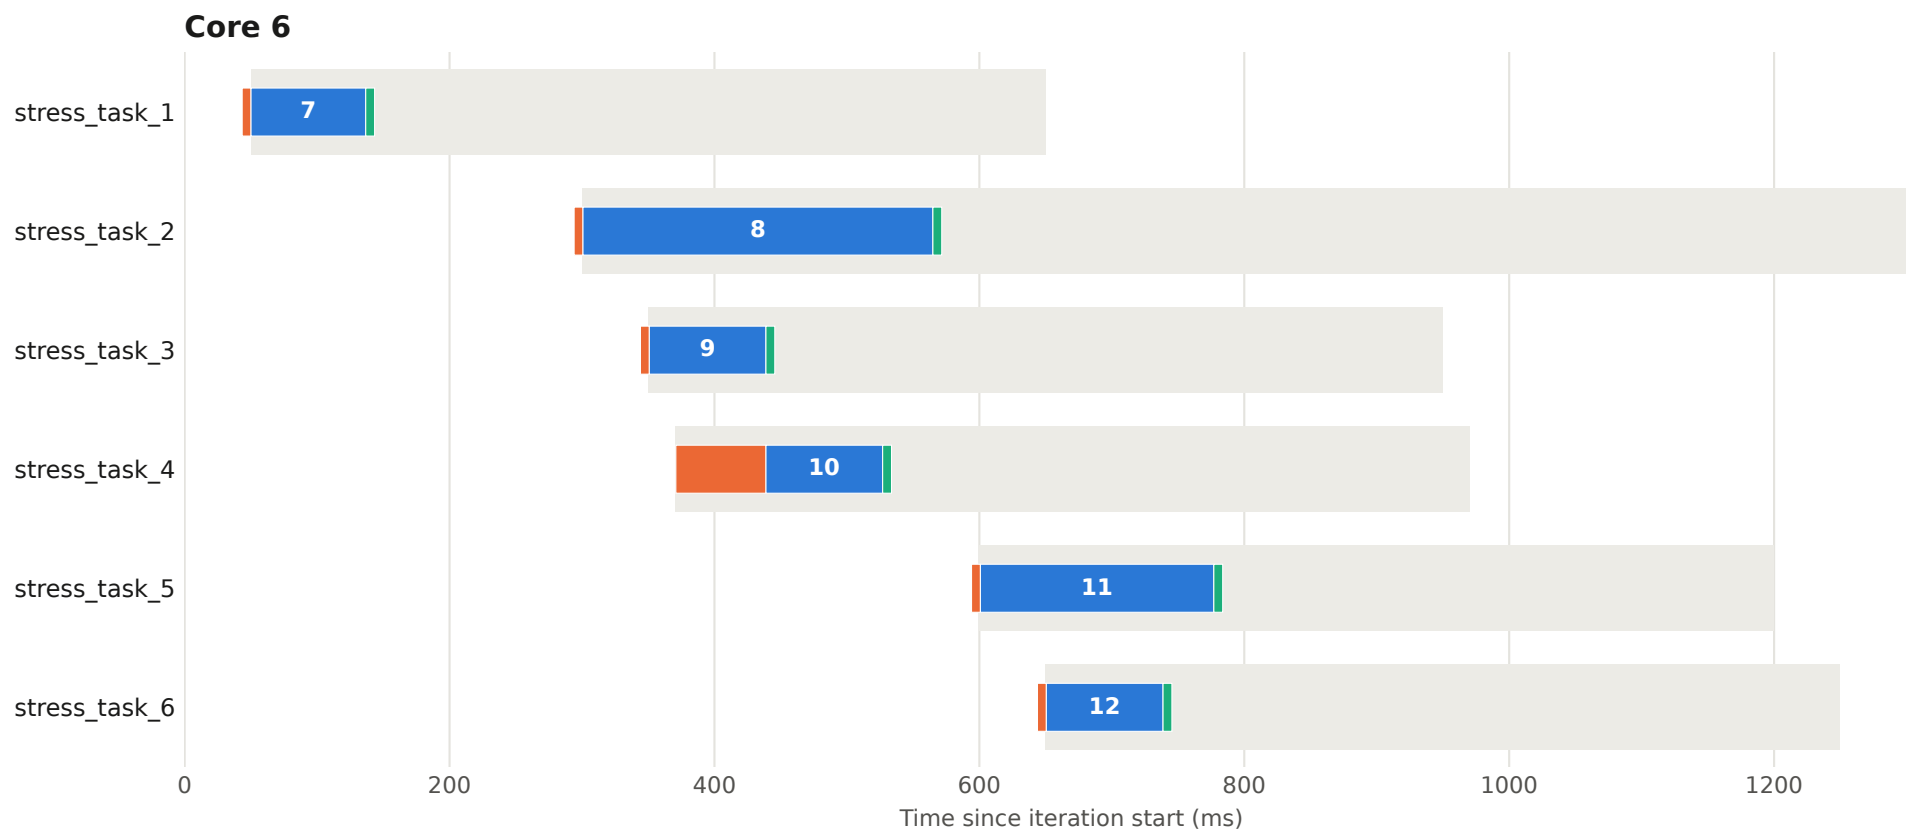


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 44 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

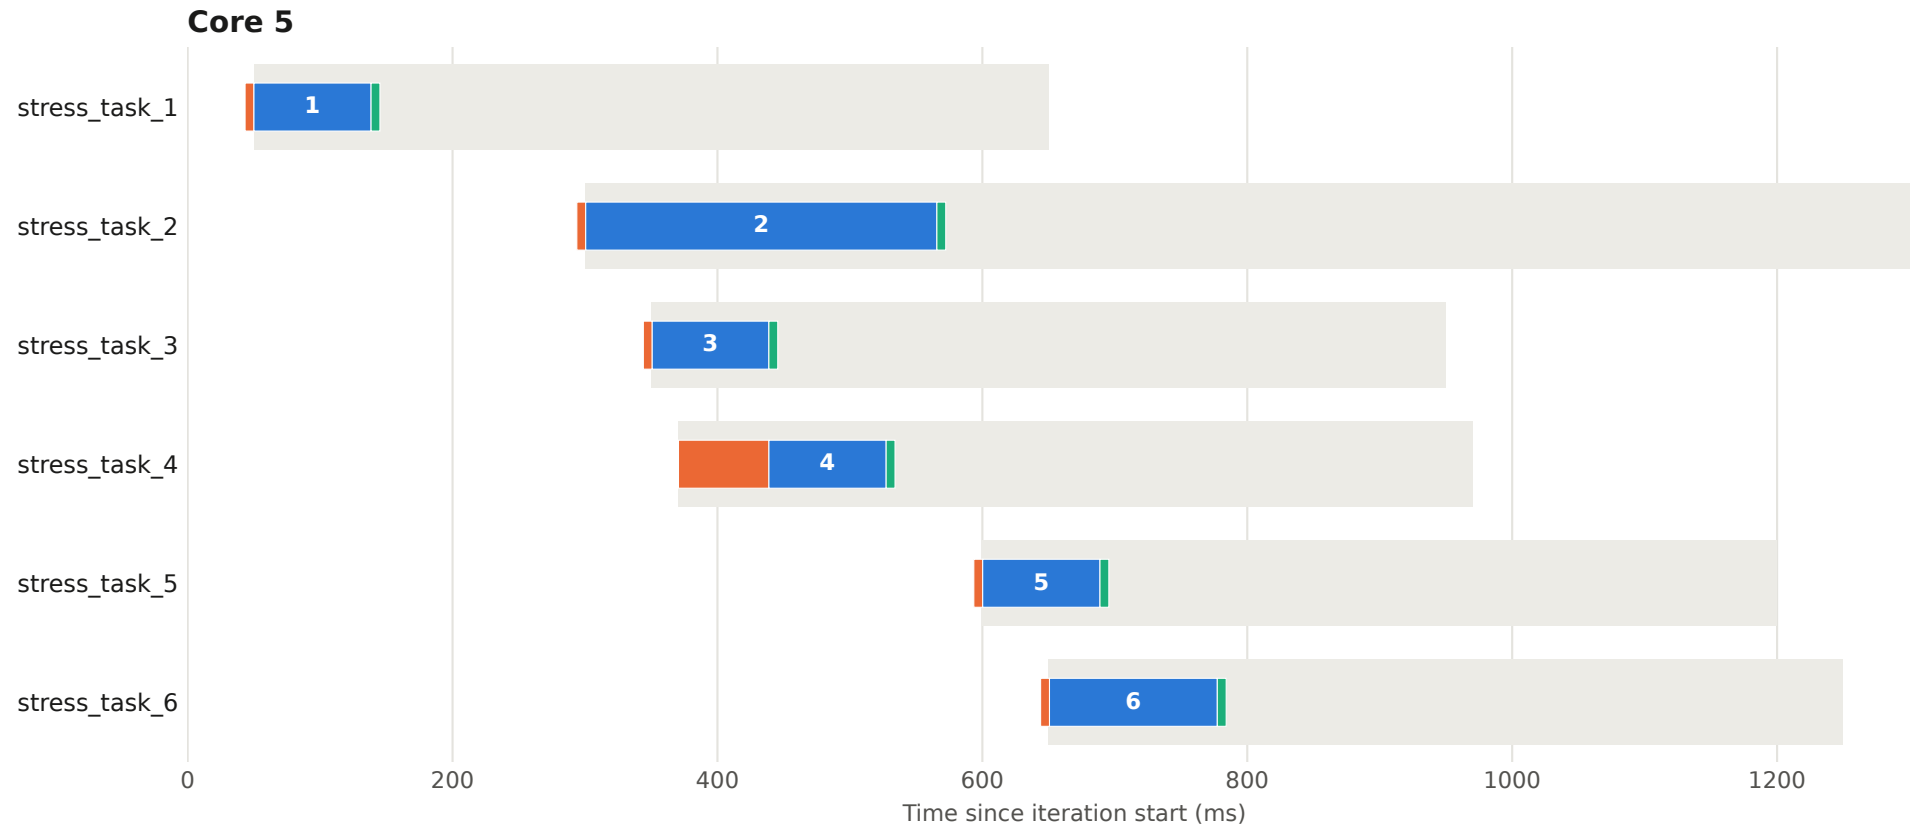


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 44 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

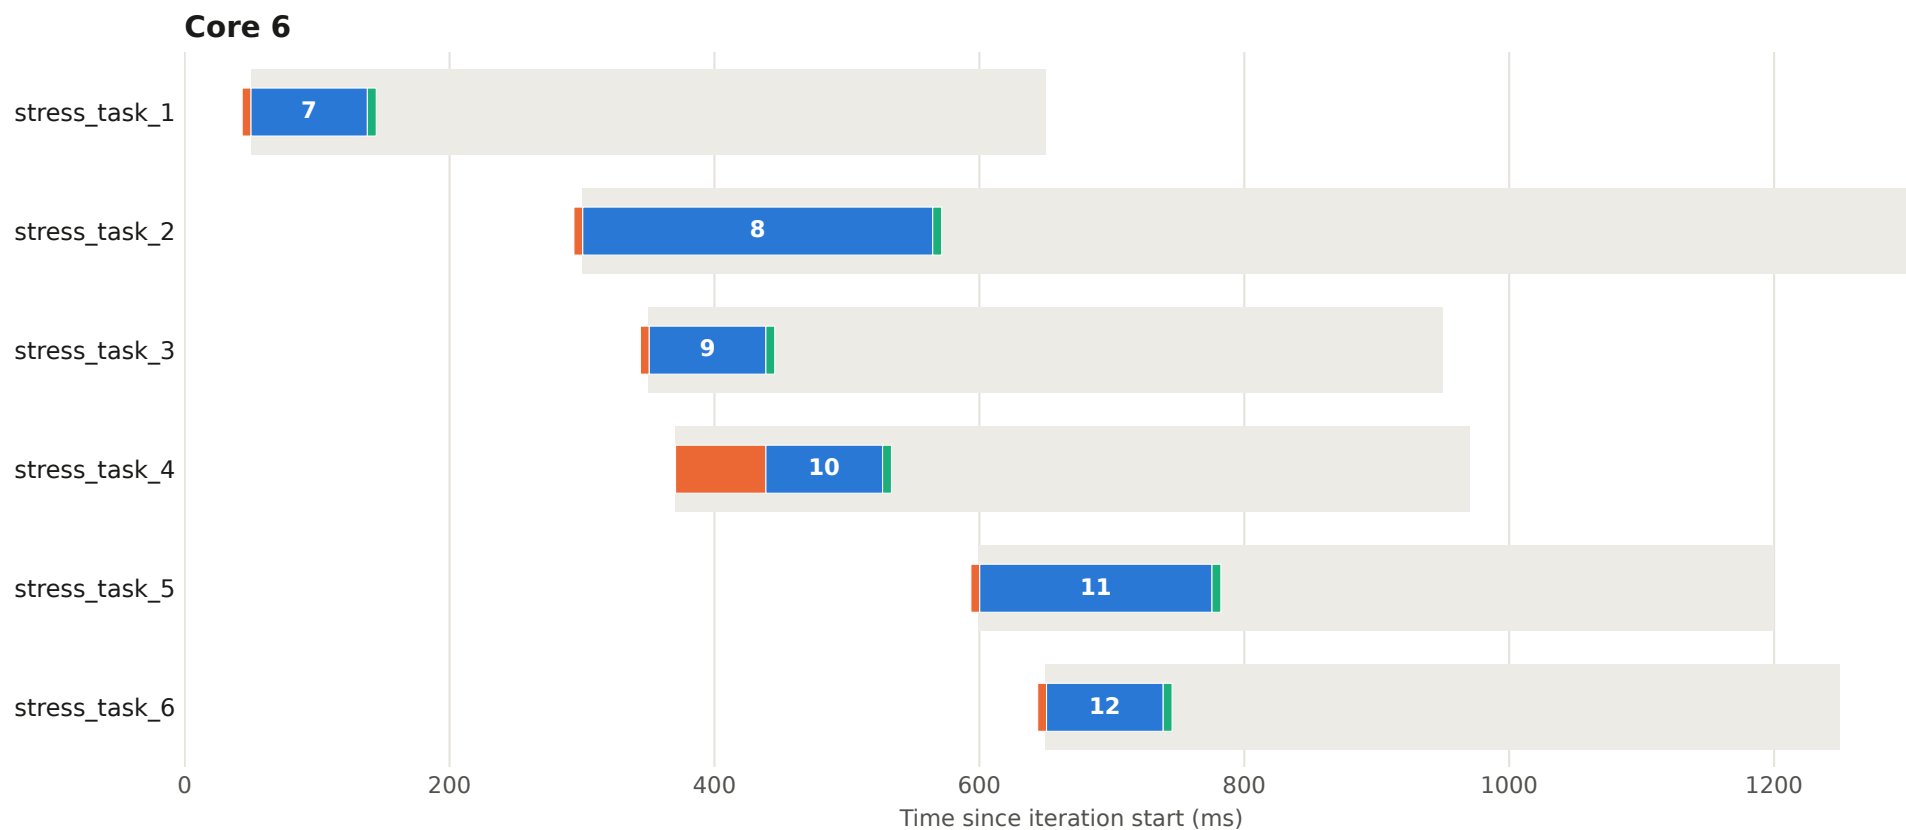


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 45 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

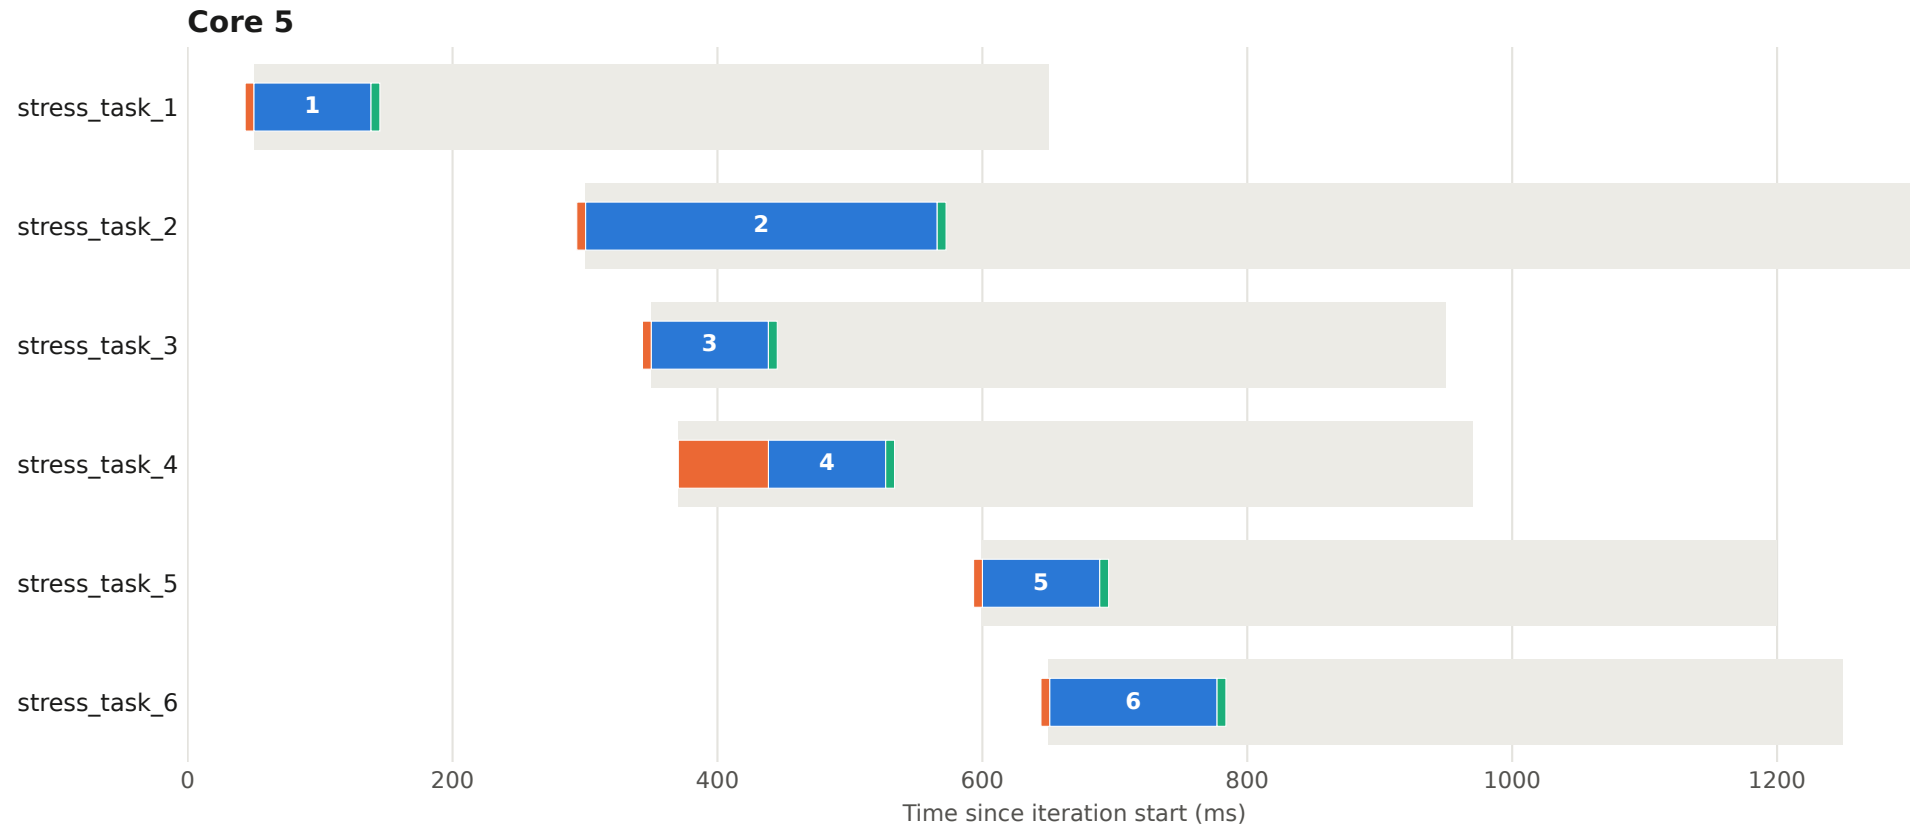


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 45 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

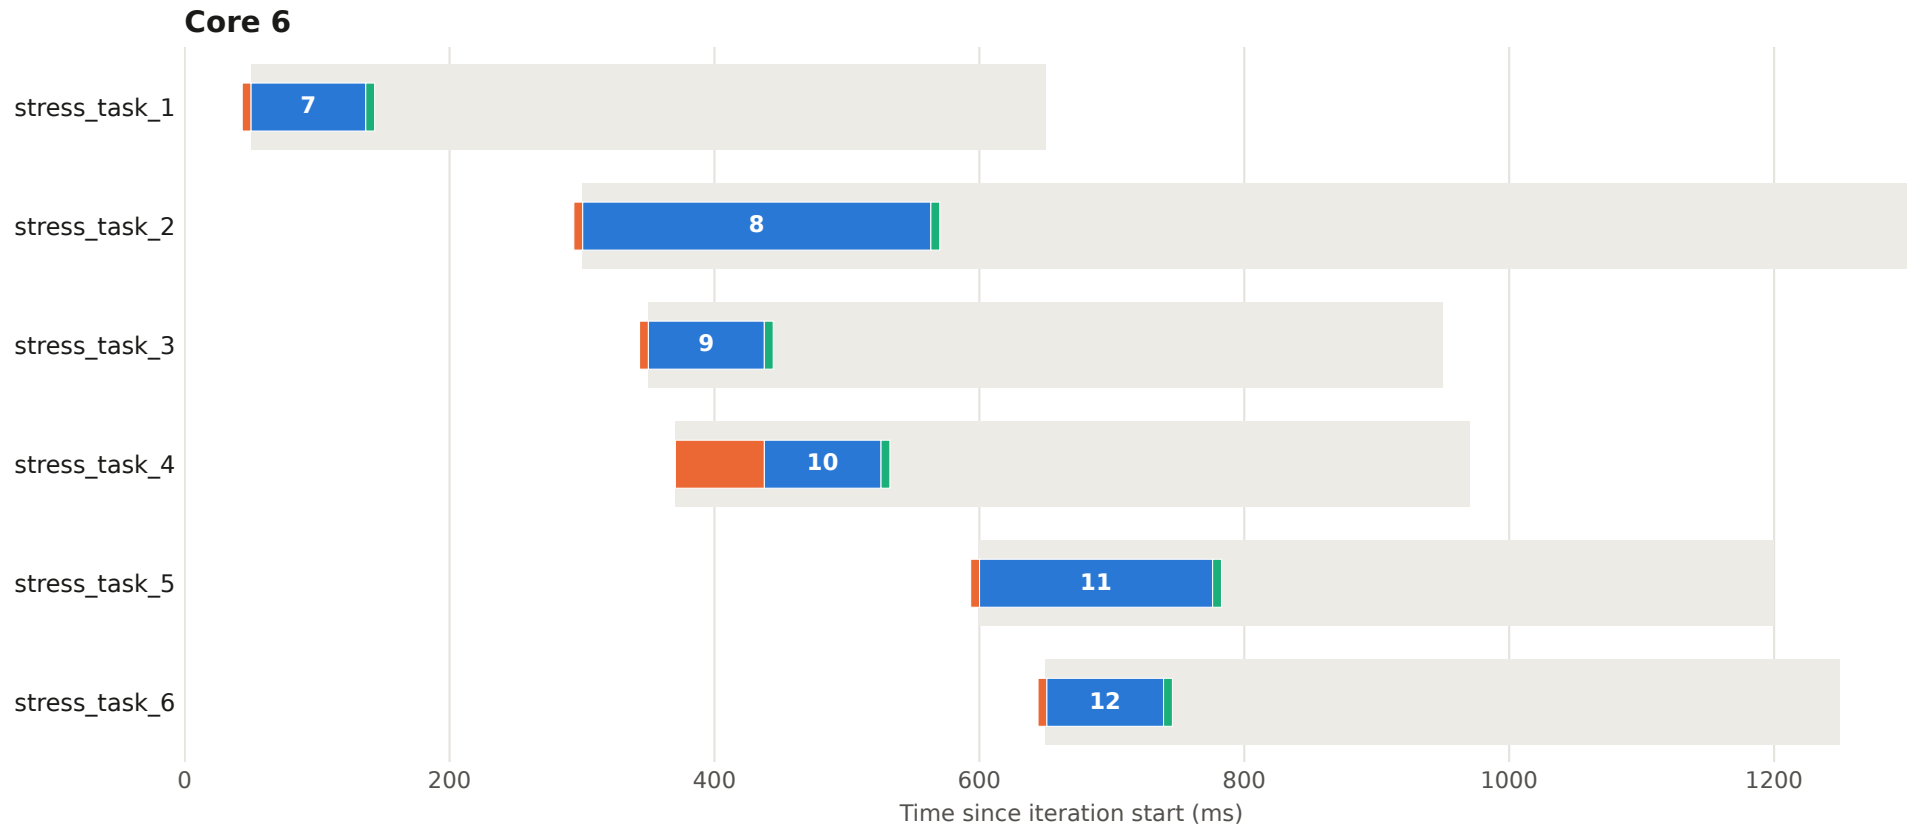


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 46 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

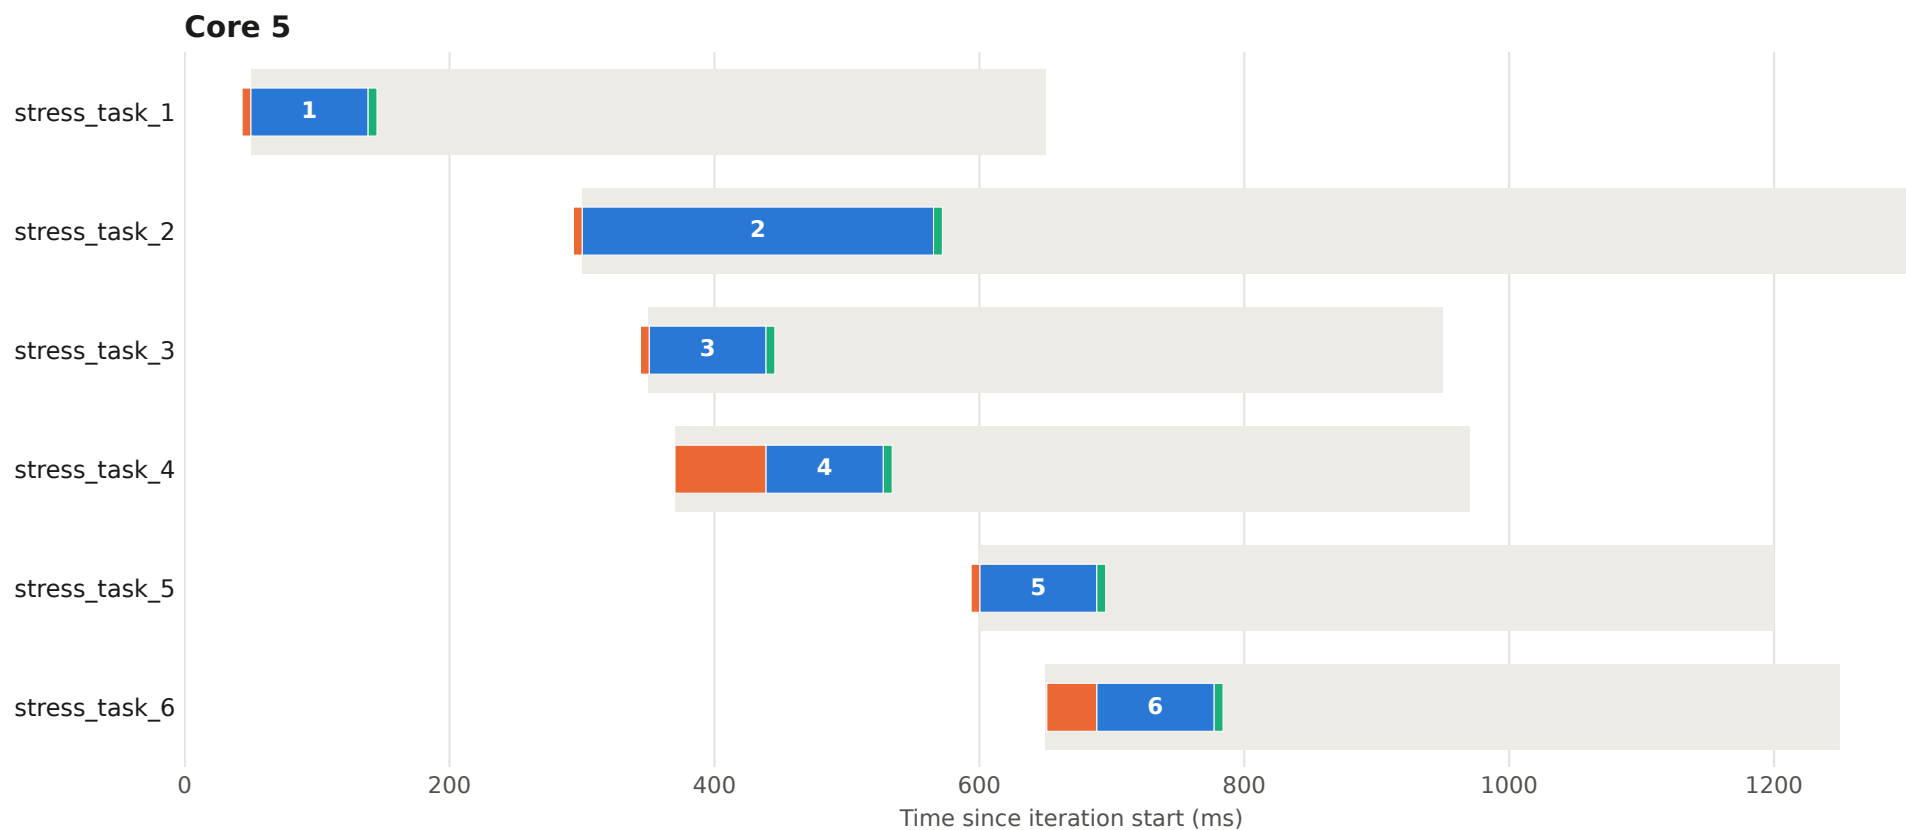


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 46 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

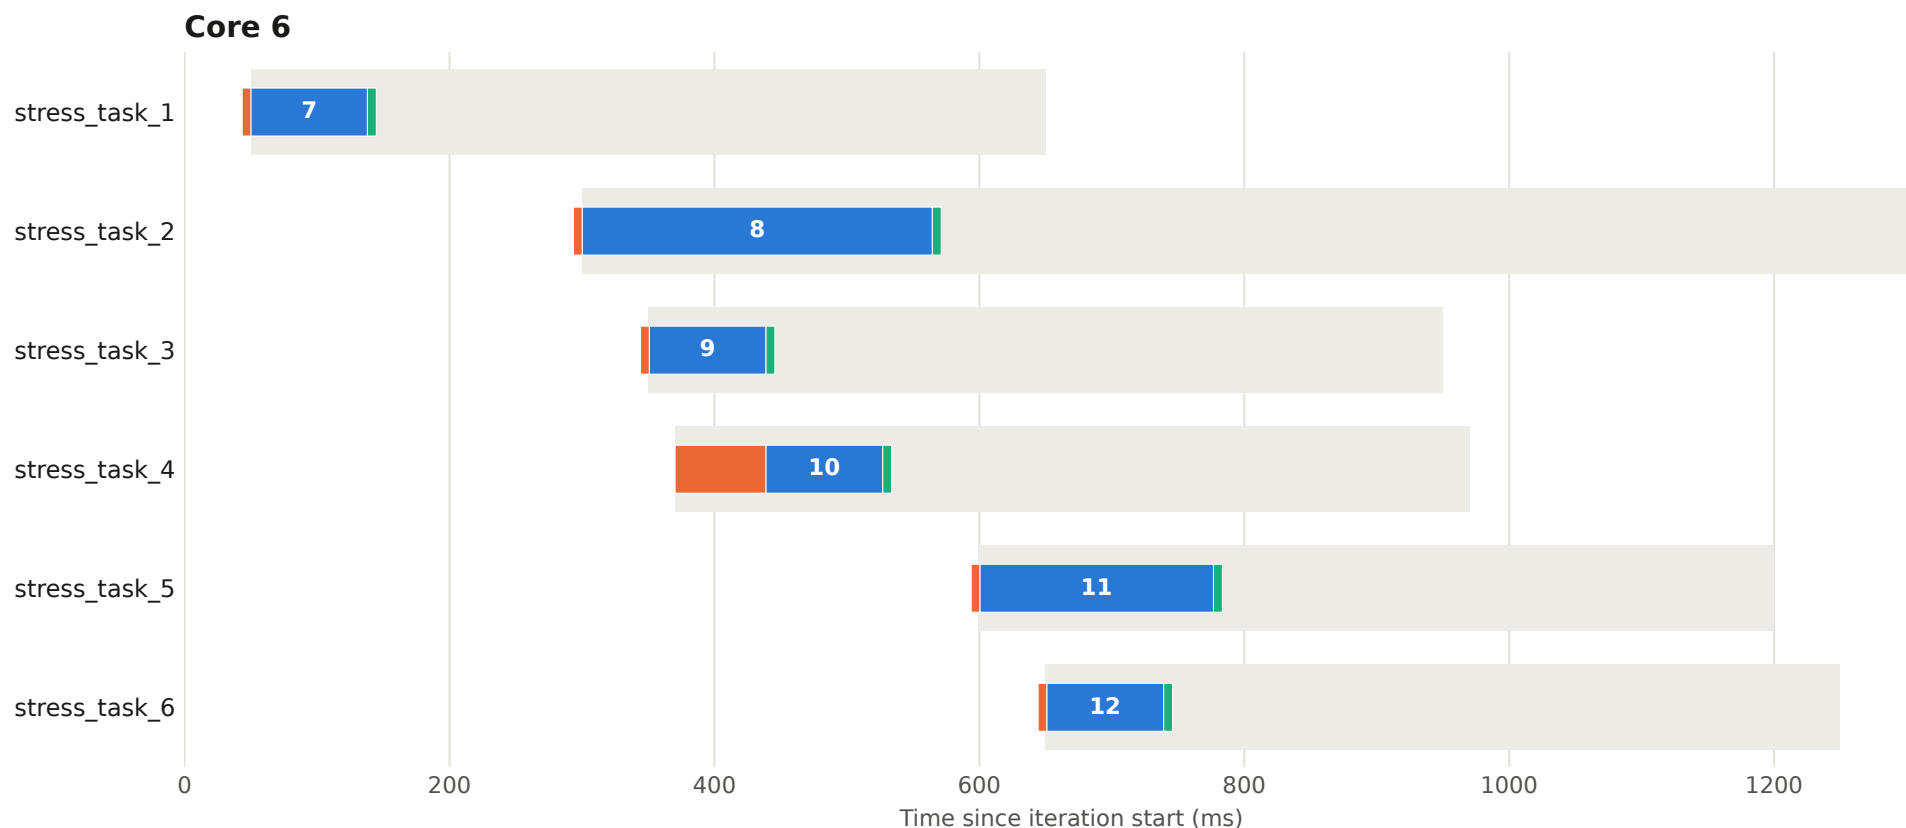


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 47 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

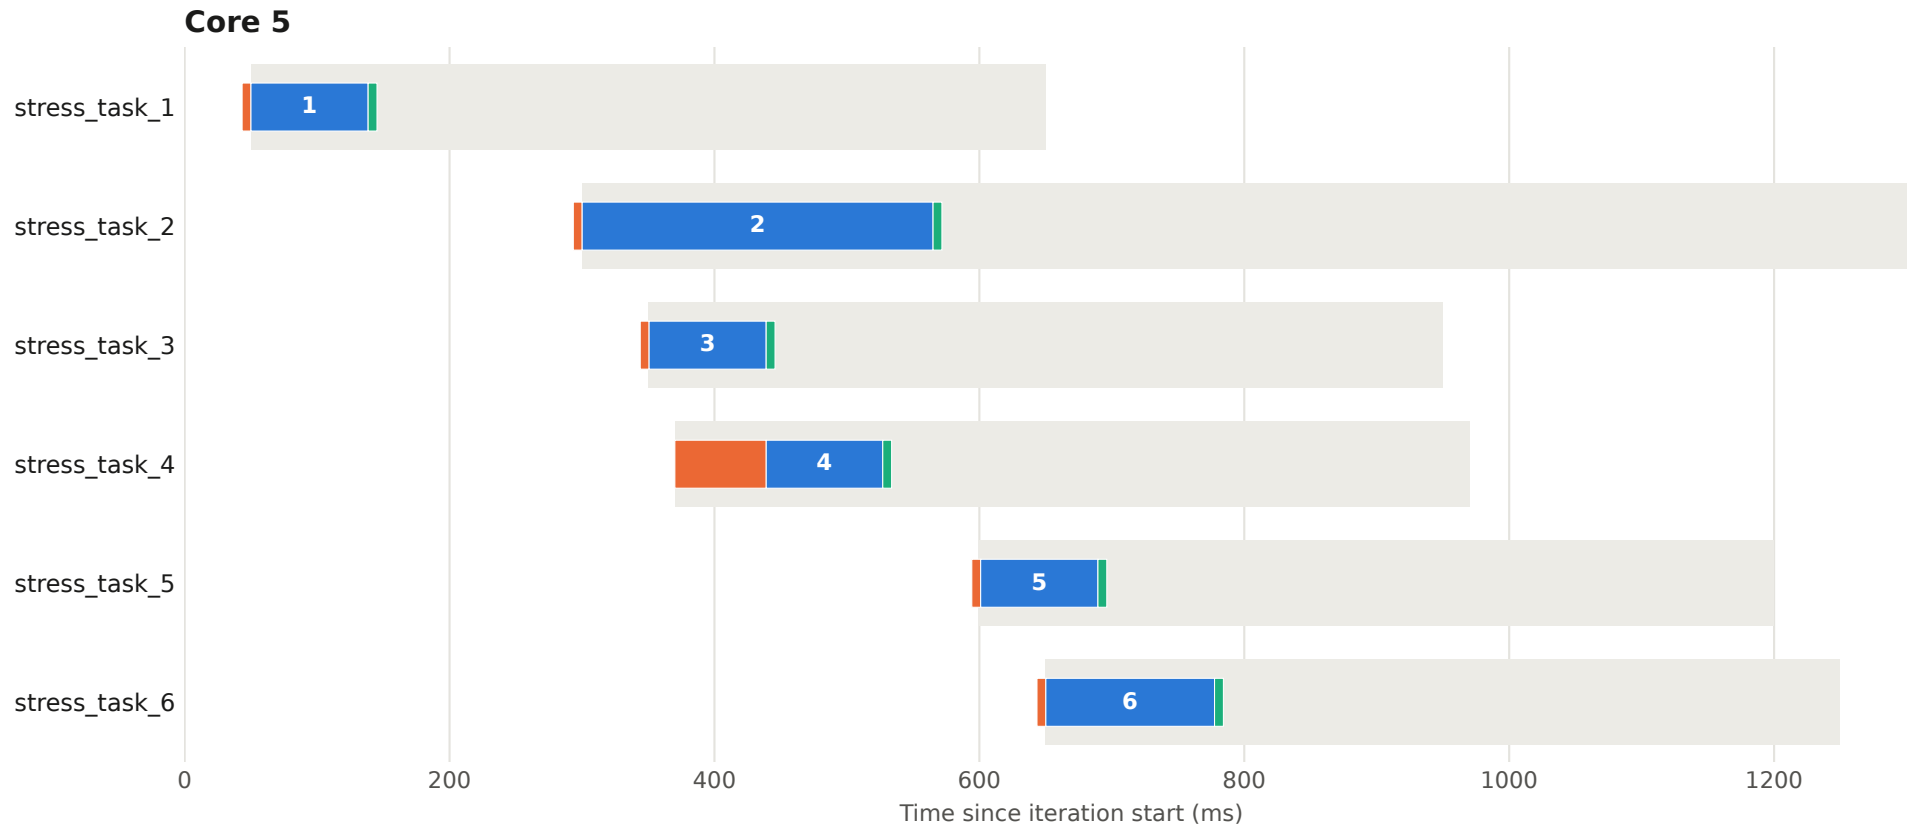


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 47 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

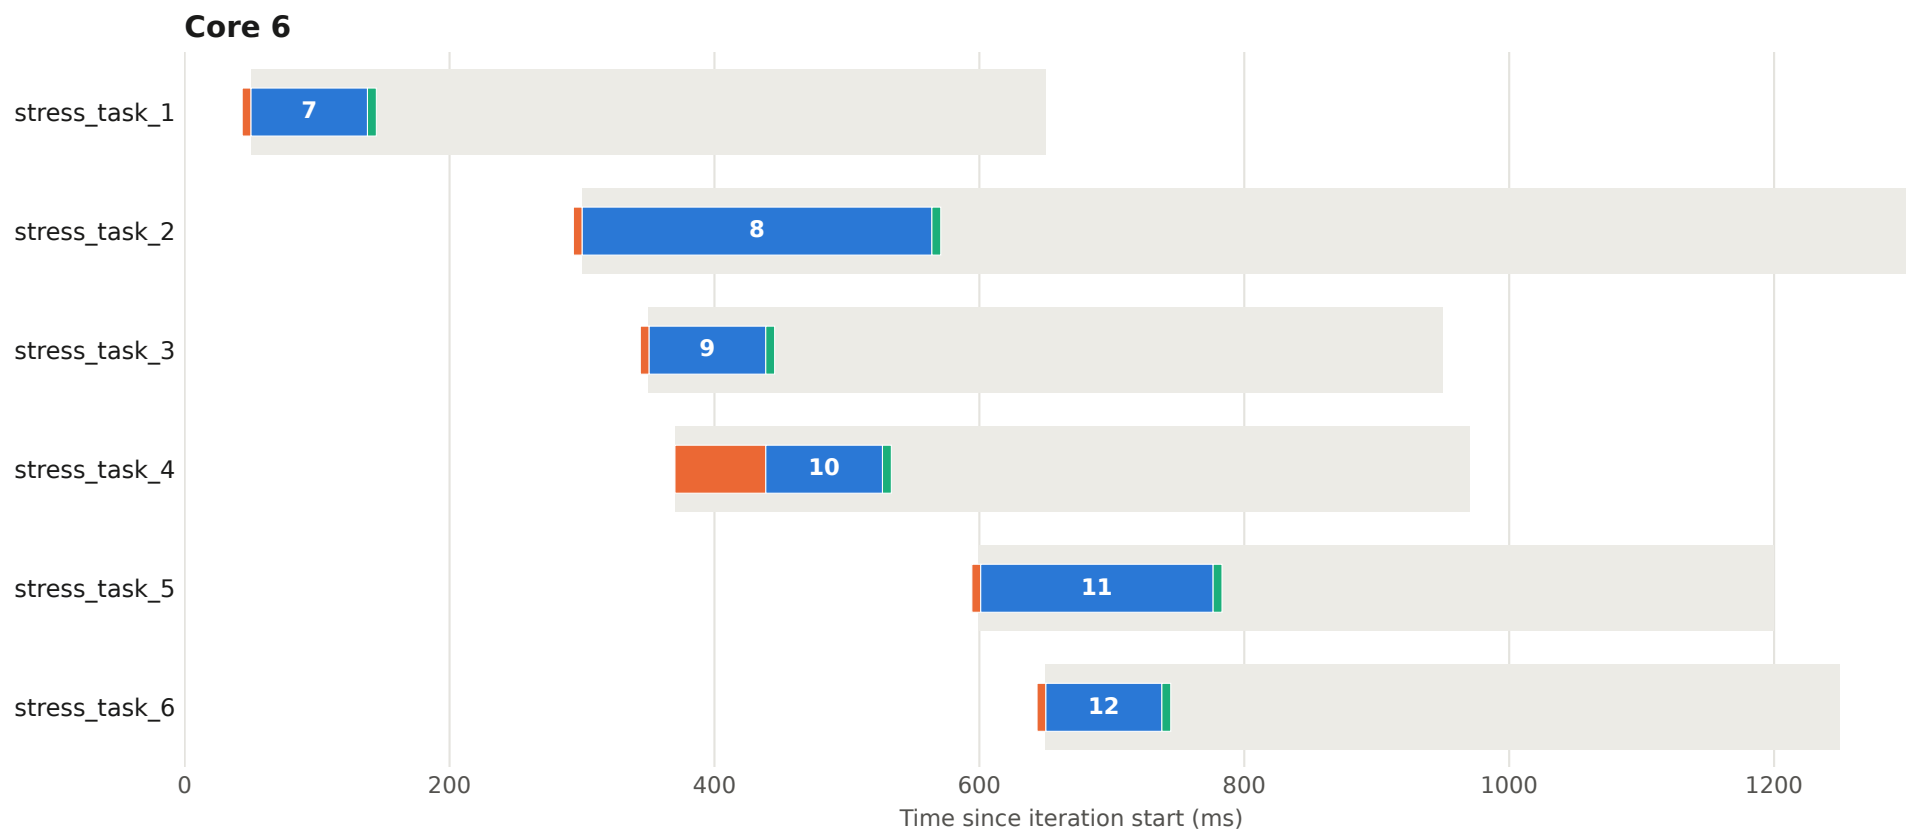


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 48 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

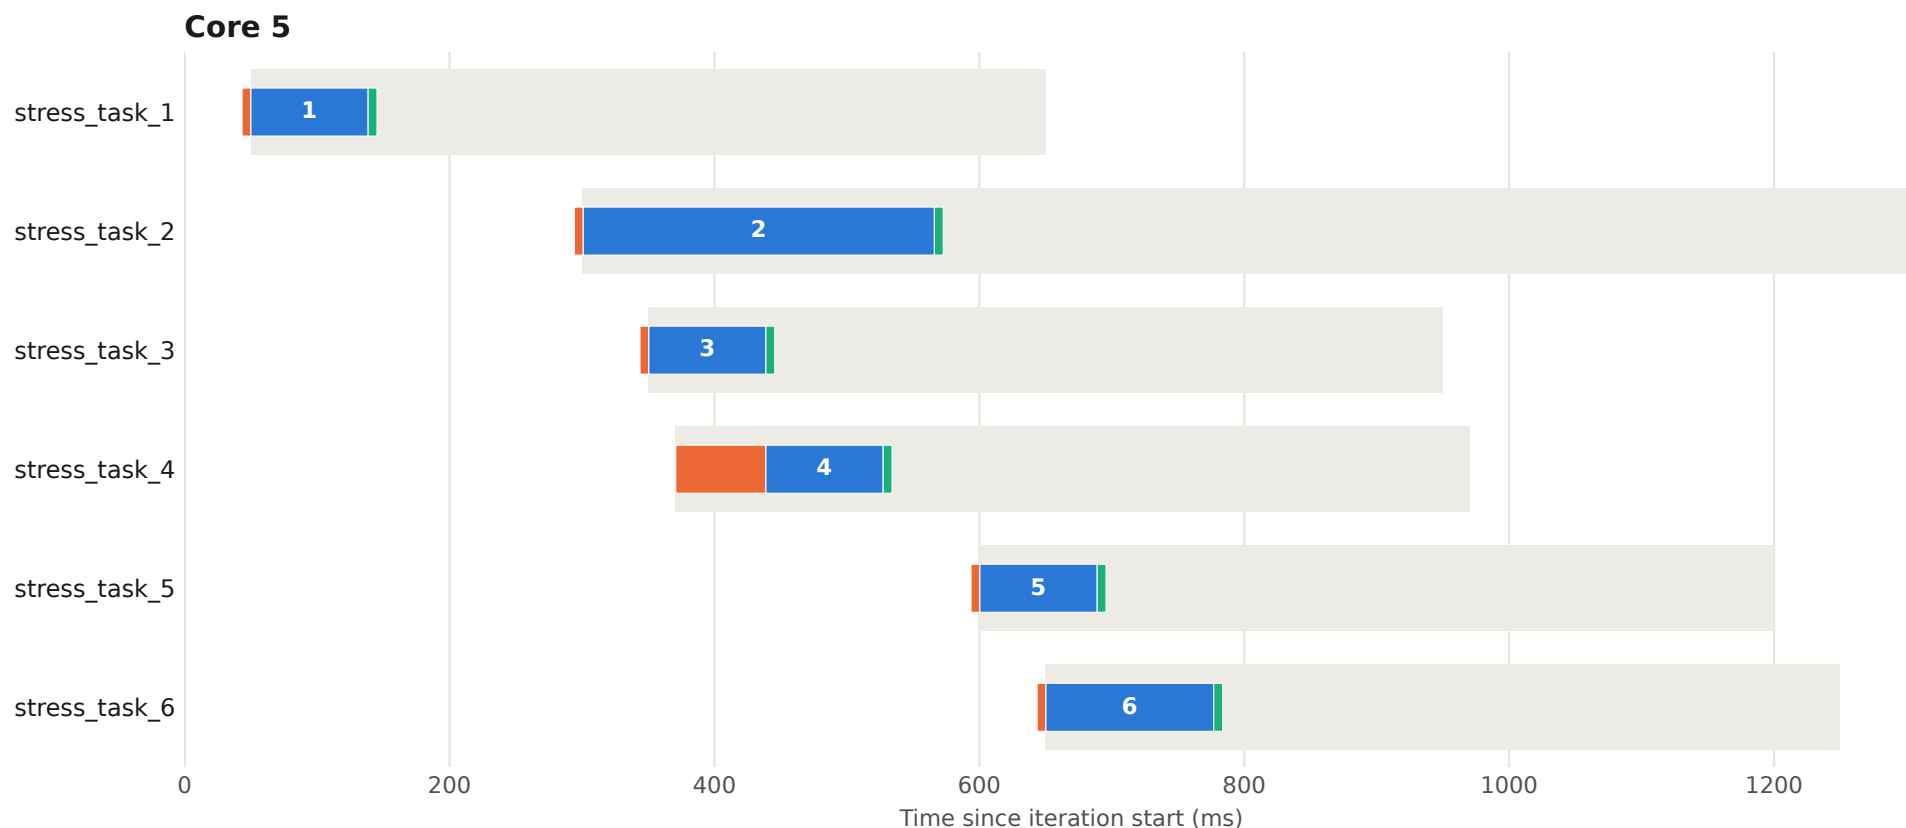


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 48 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

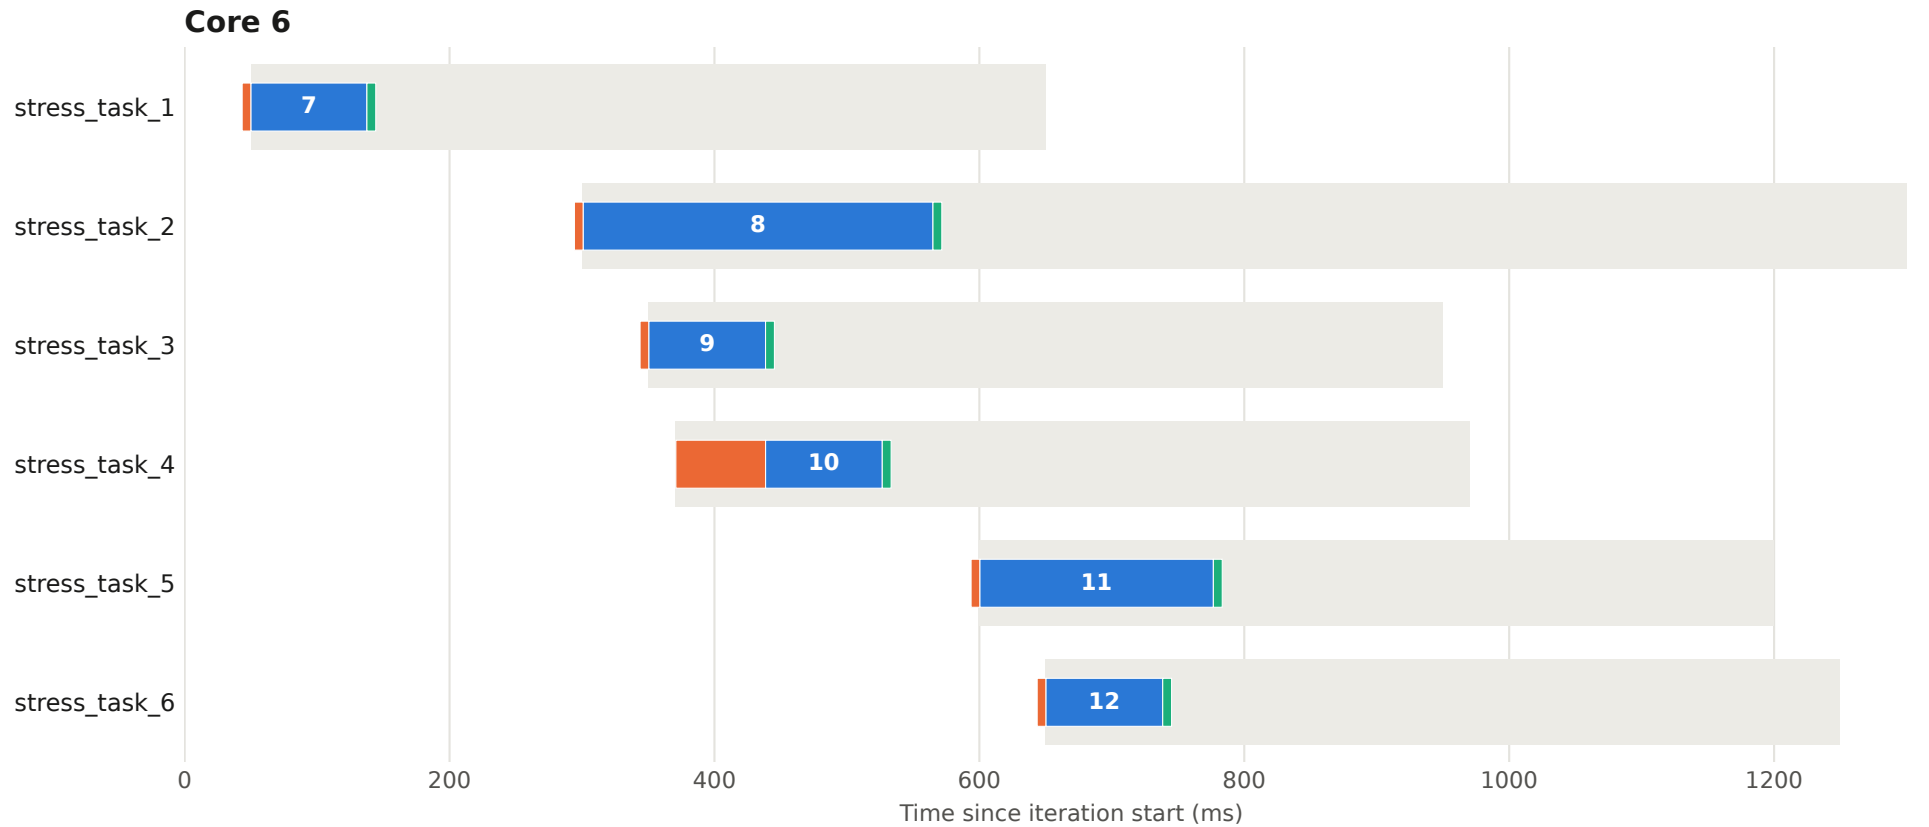


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 49 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

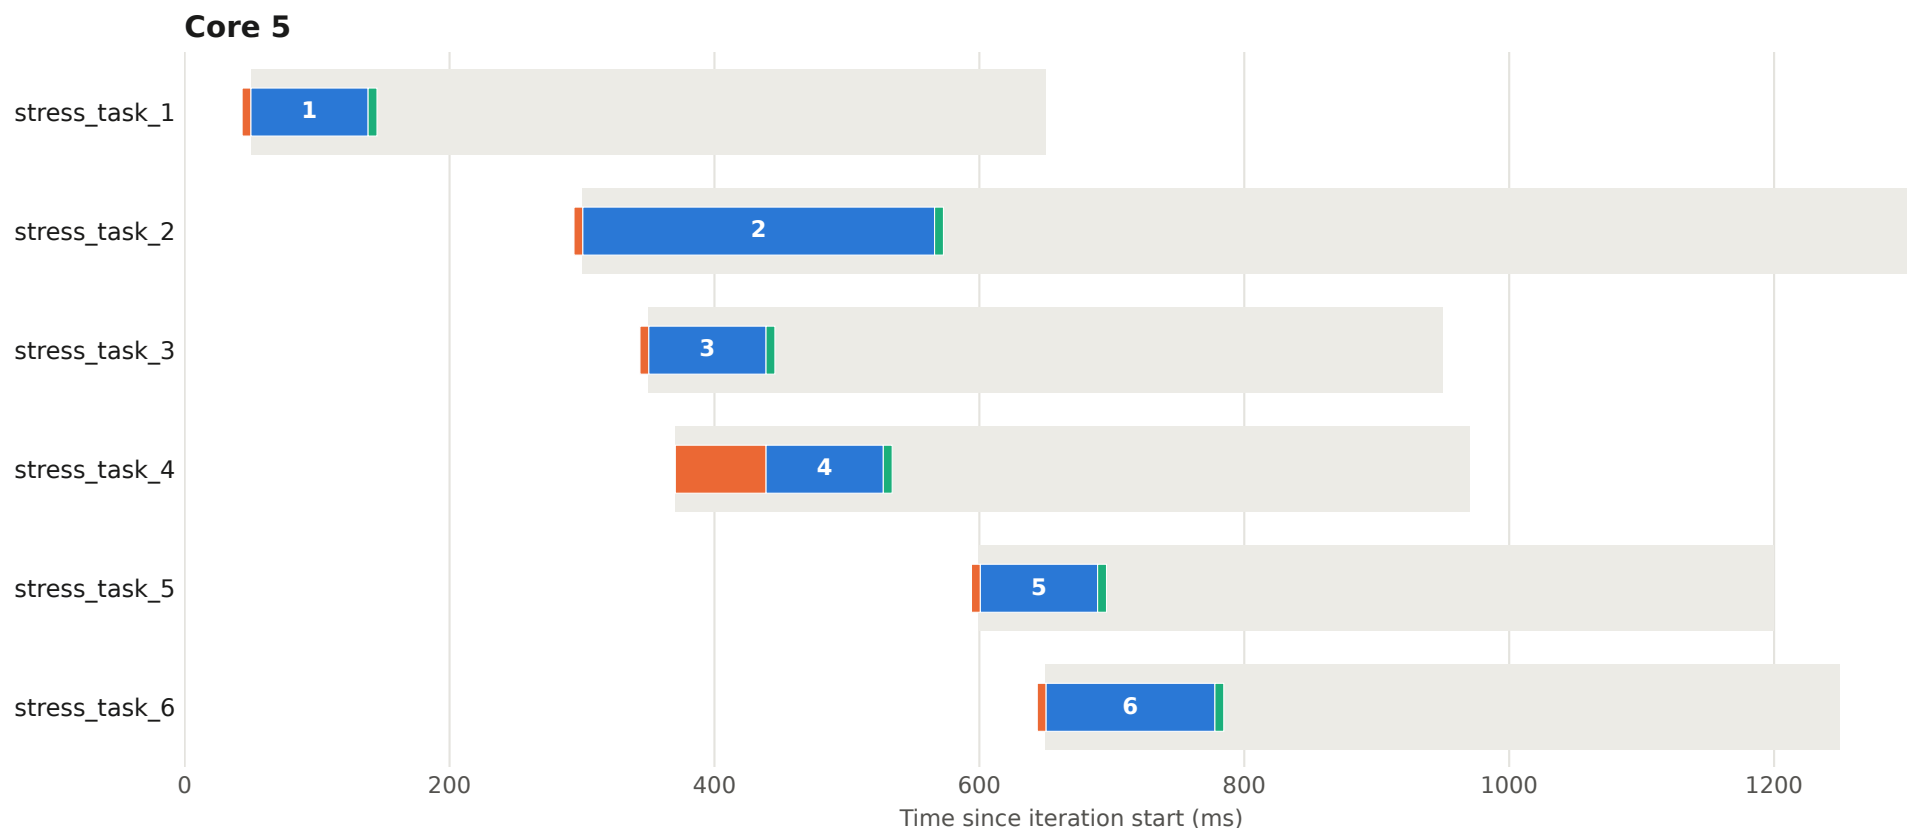


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 49 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

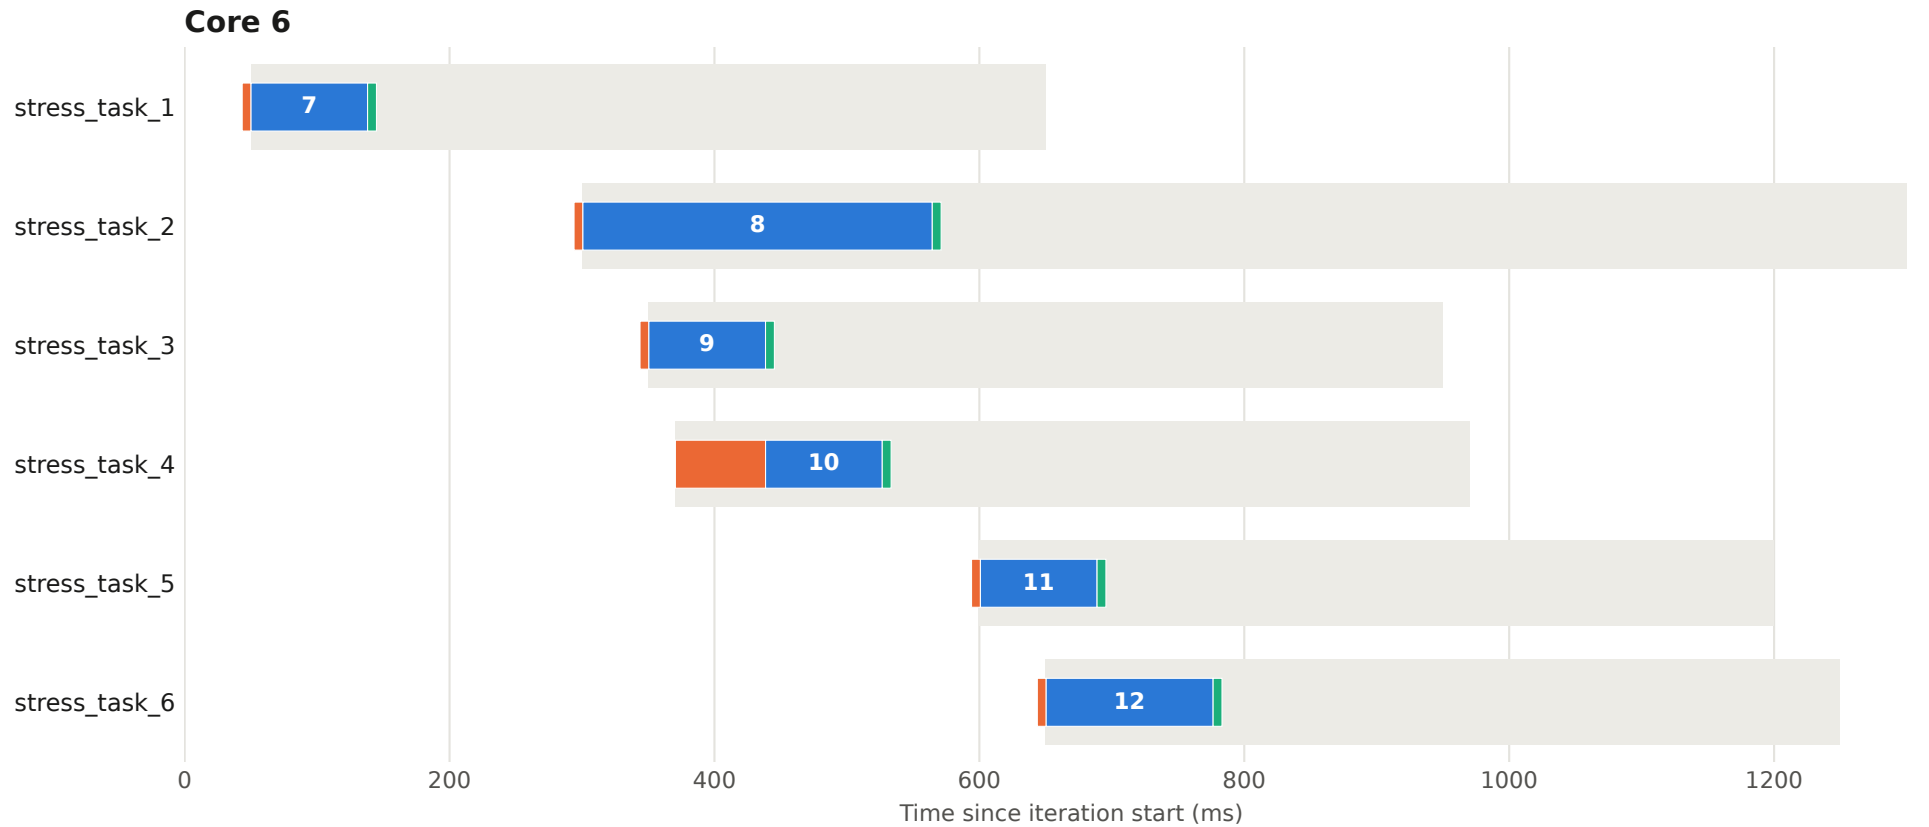


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 50 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

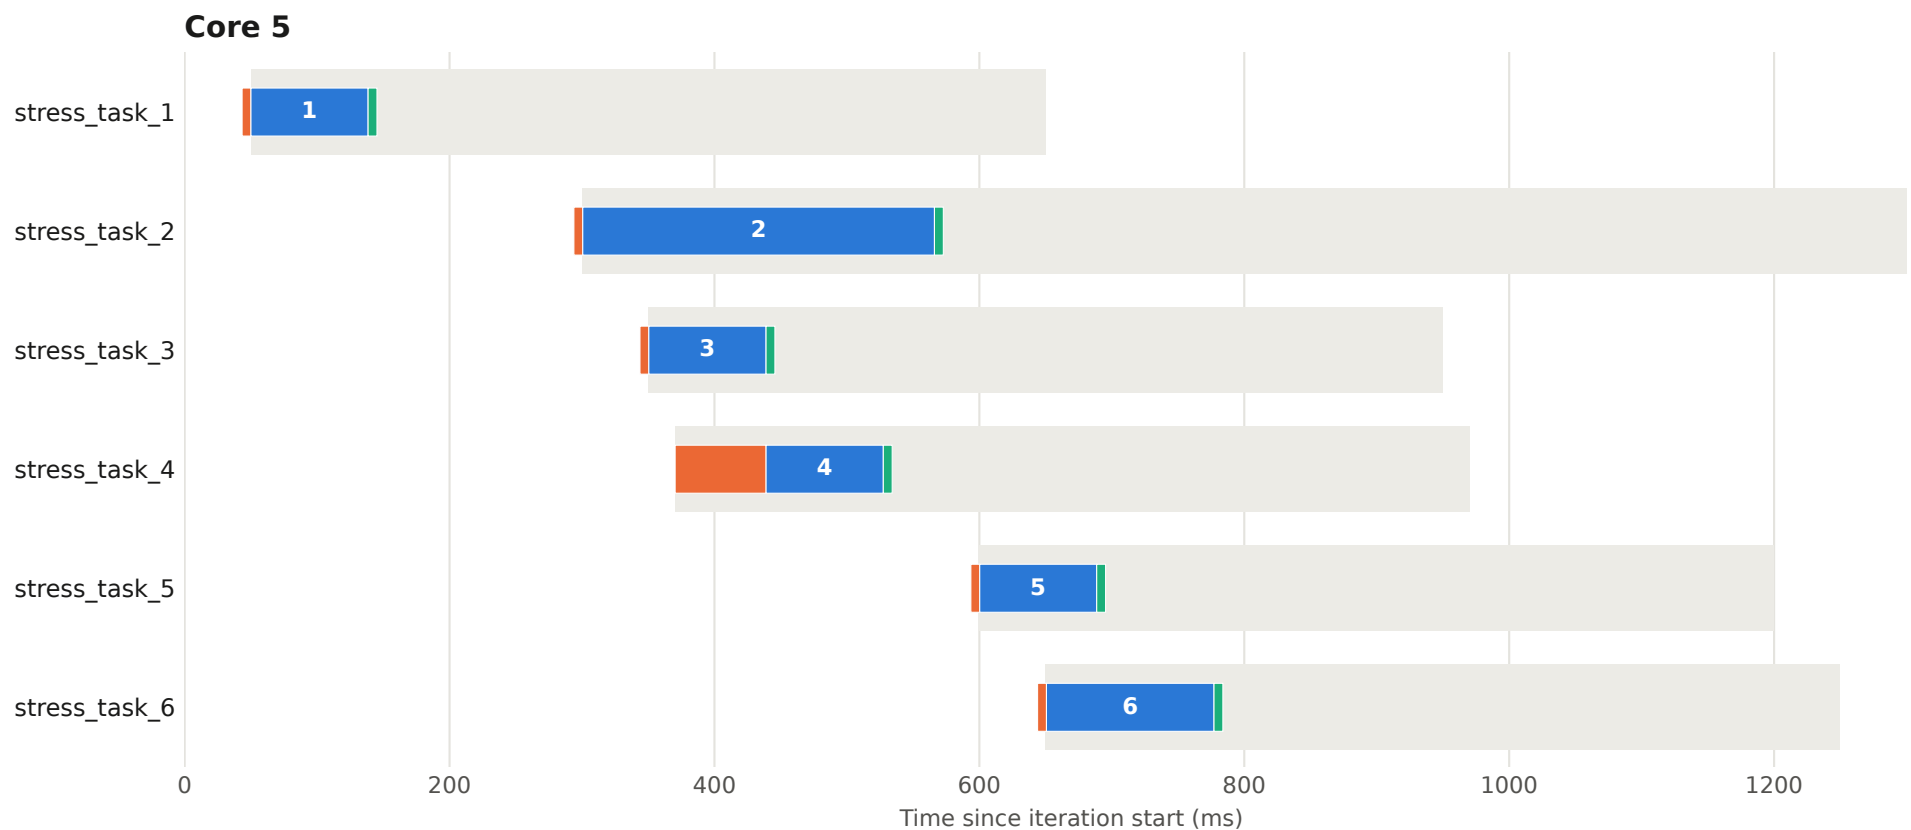


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 50 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

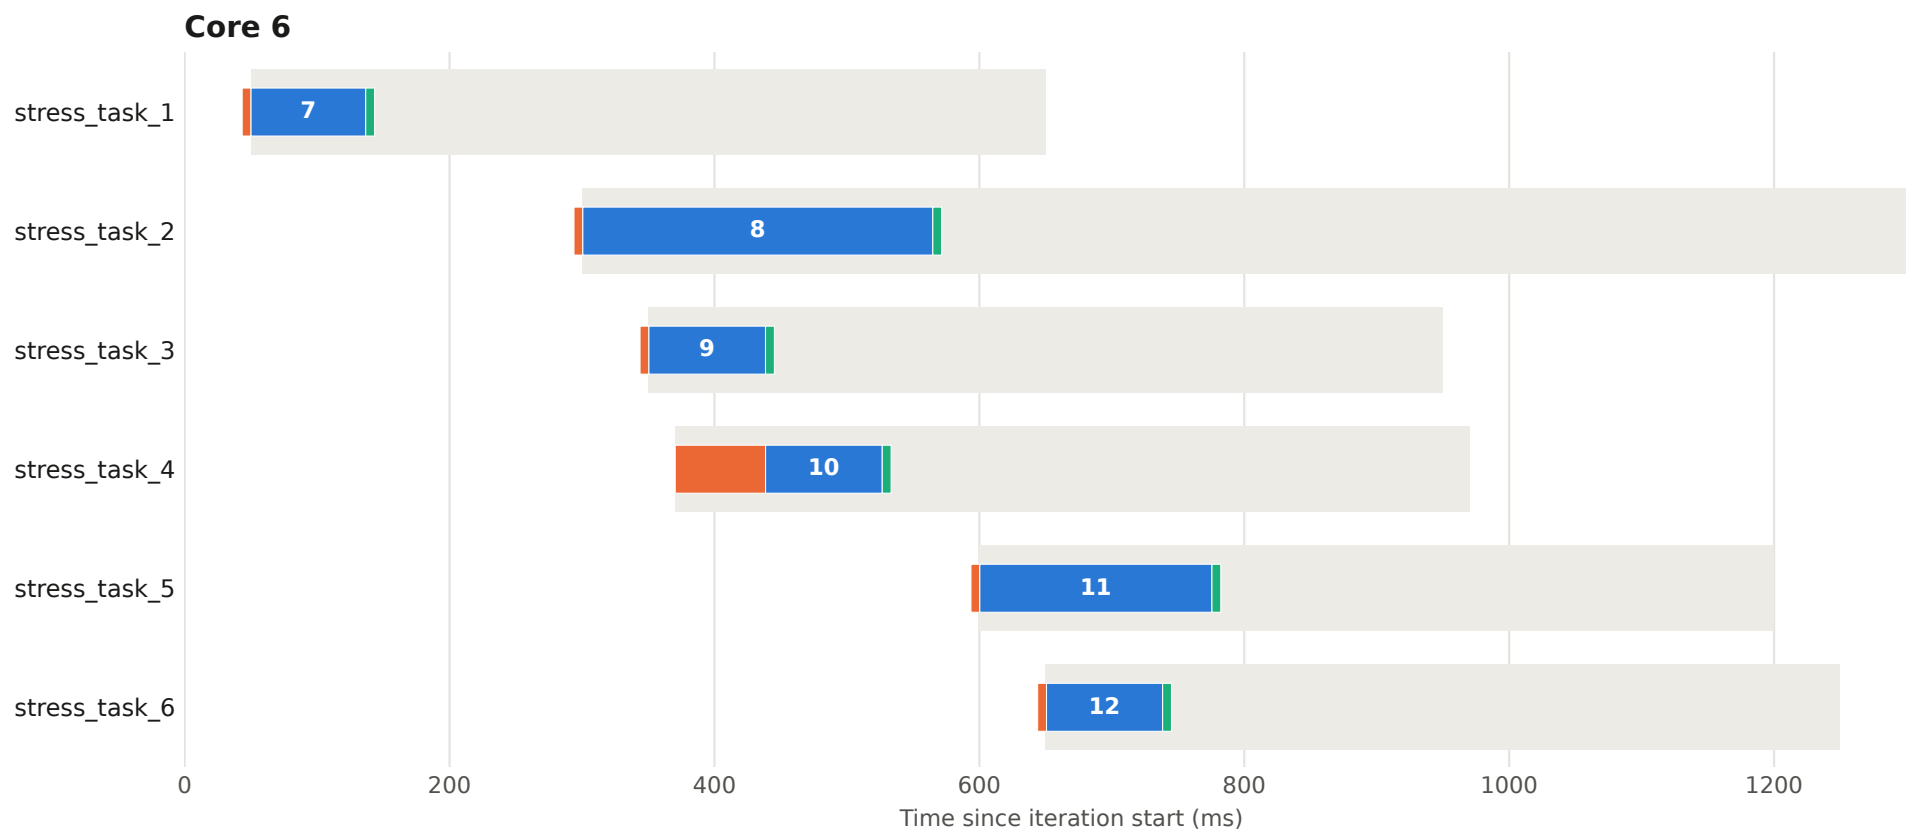


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 51 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

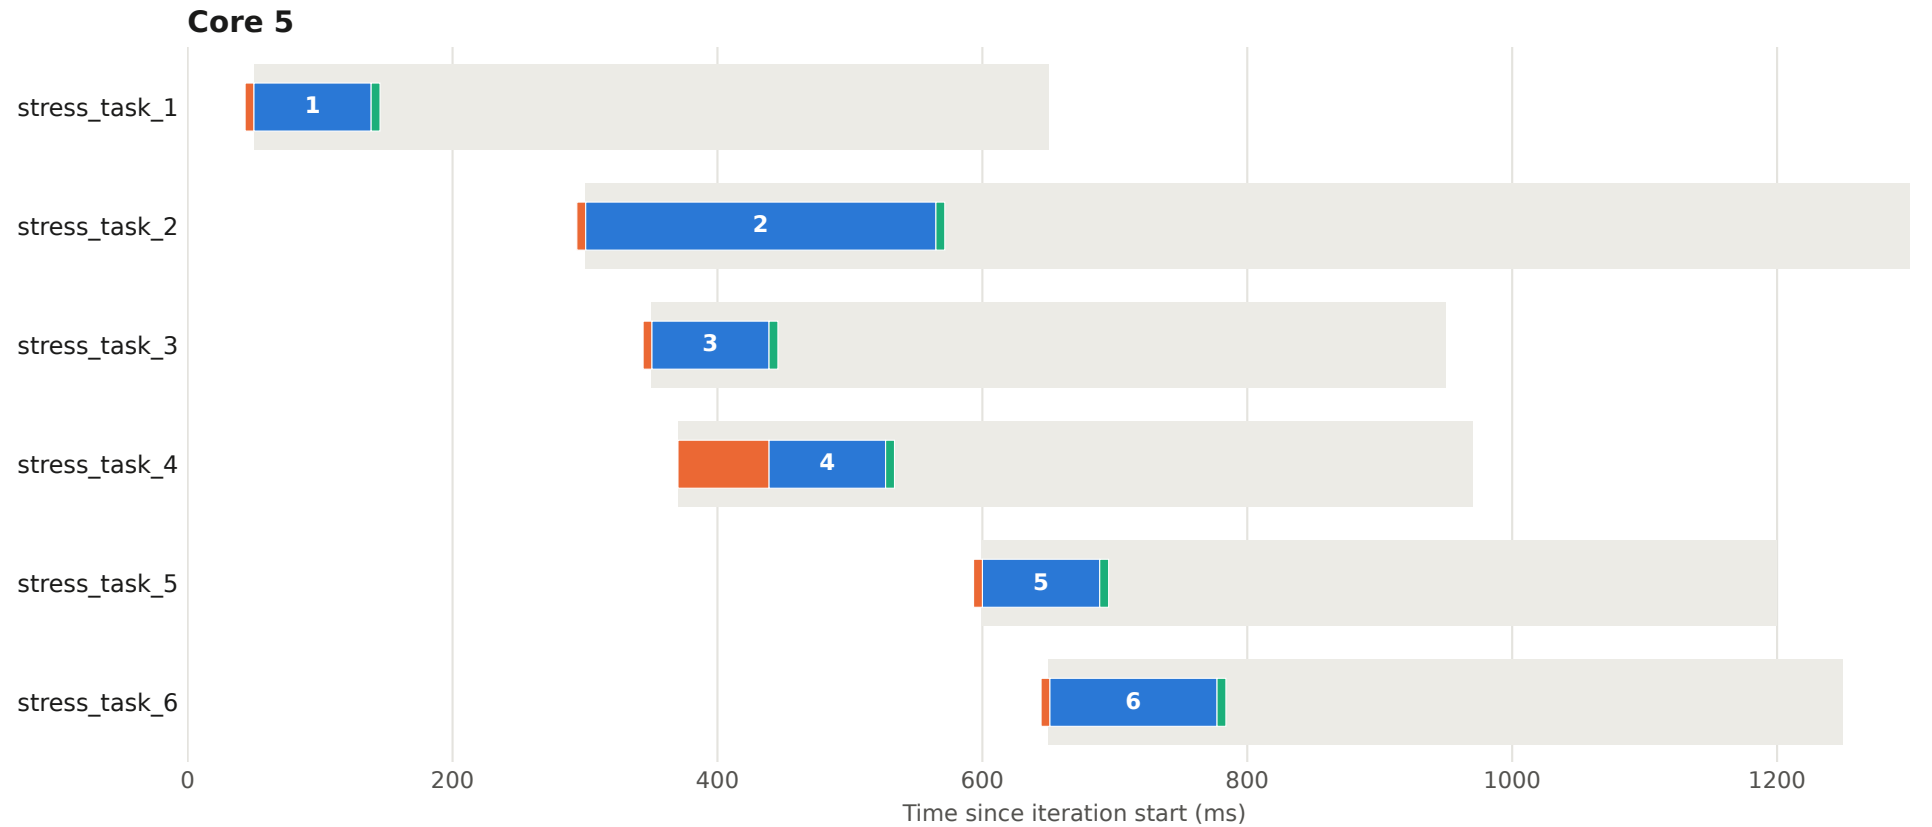


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 51 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

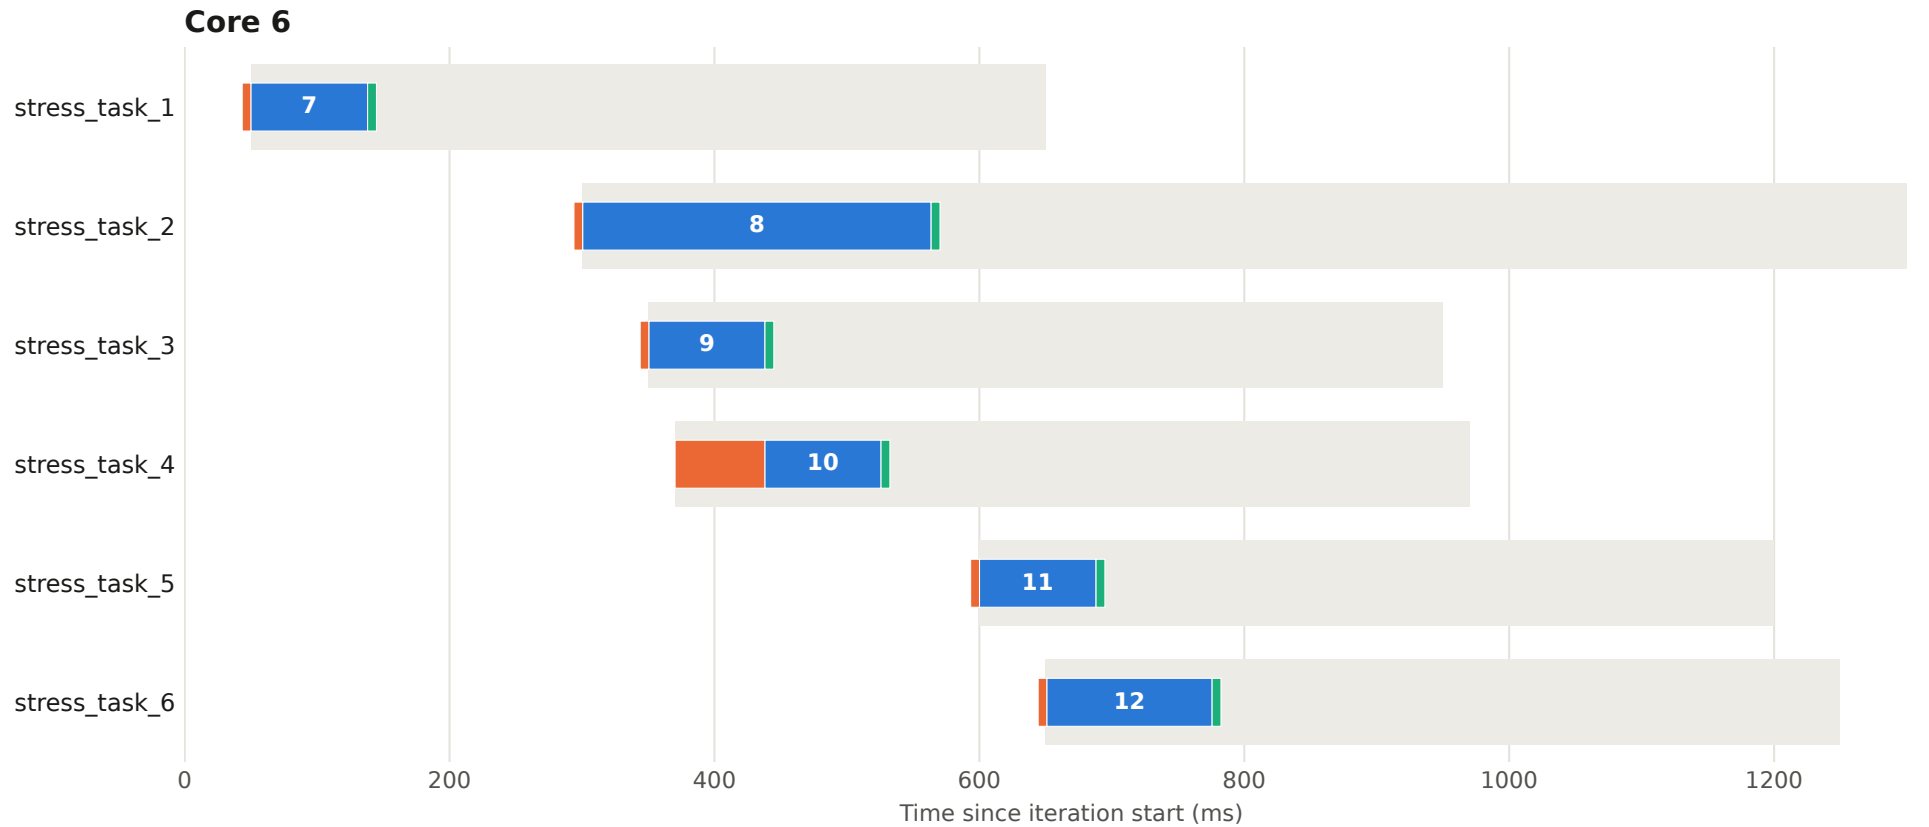


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 52 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

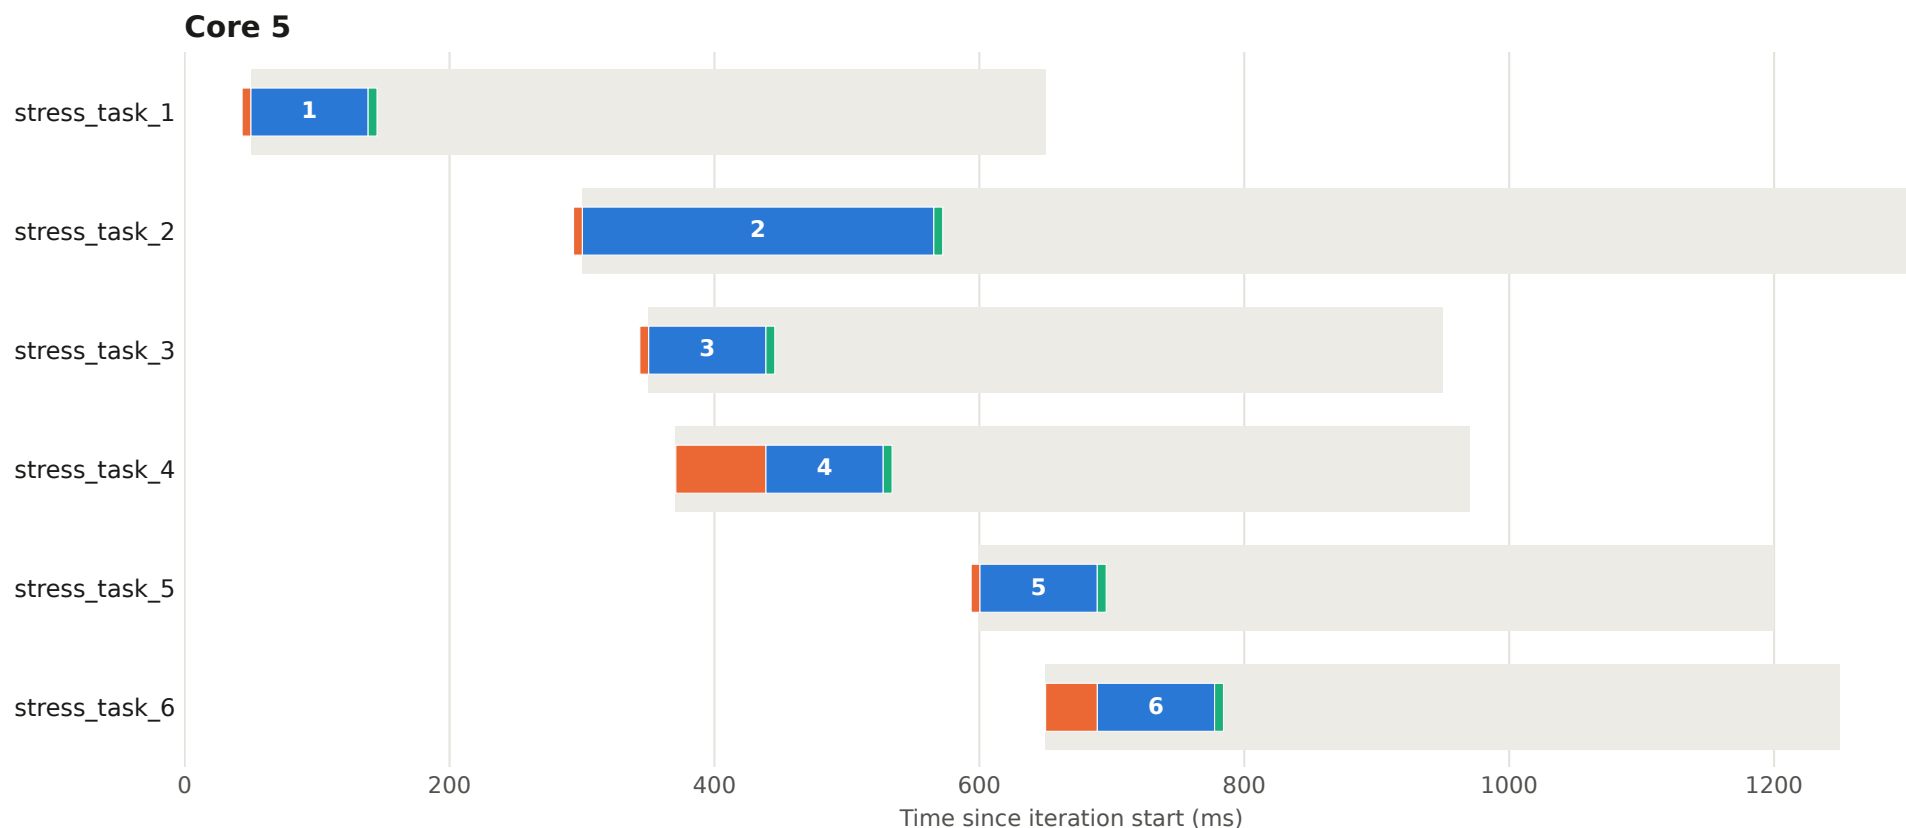


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 52 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

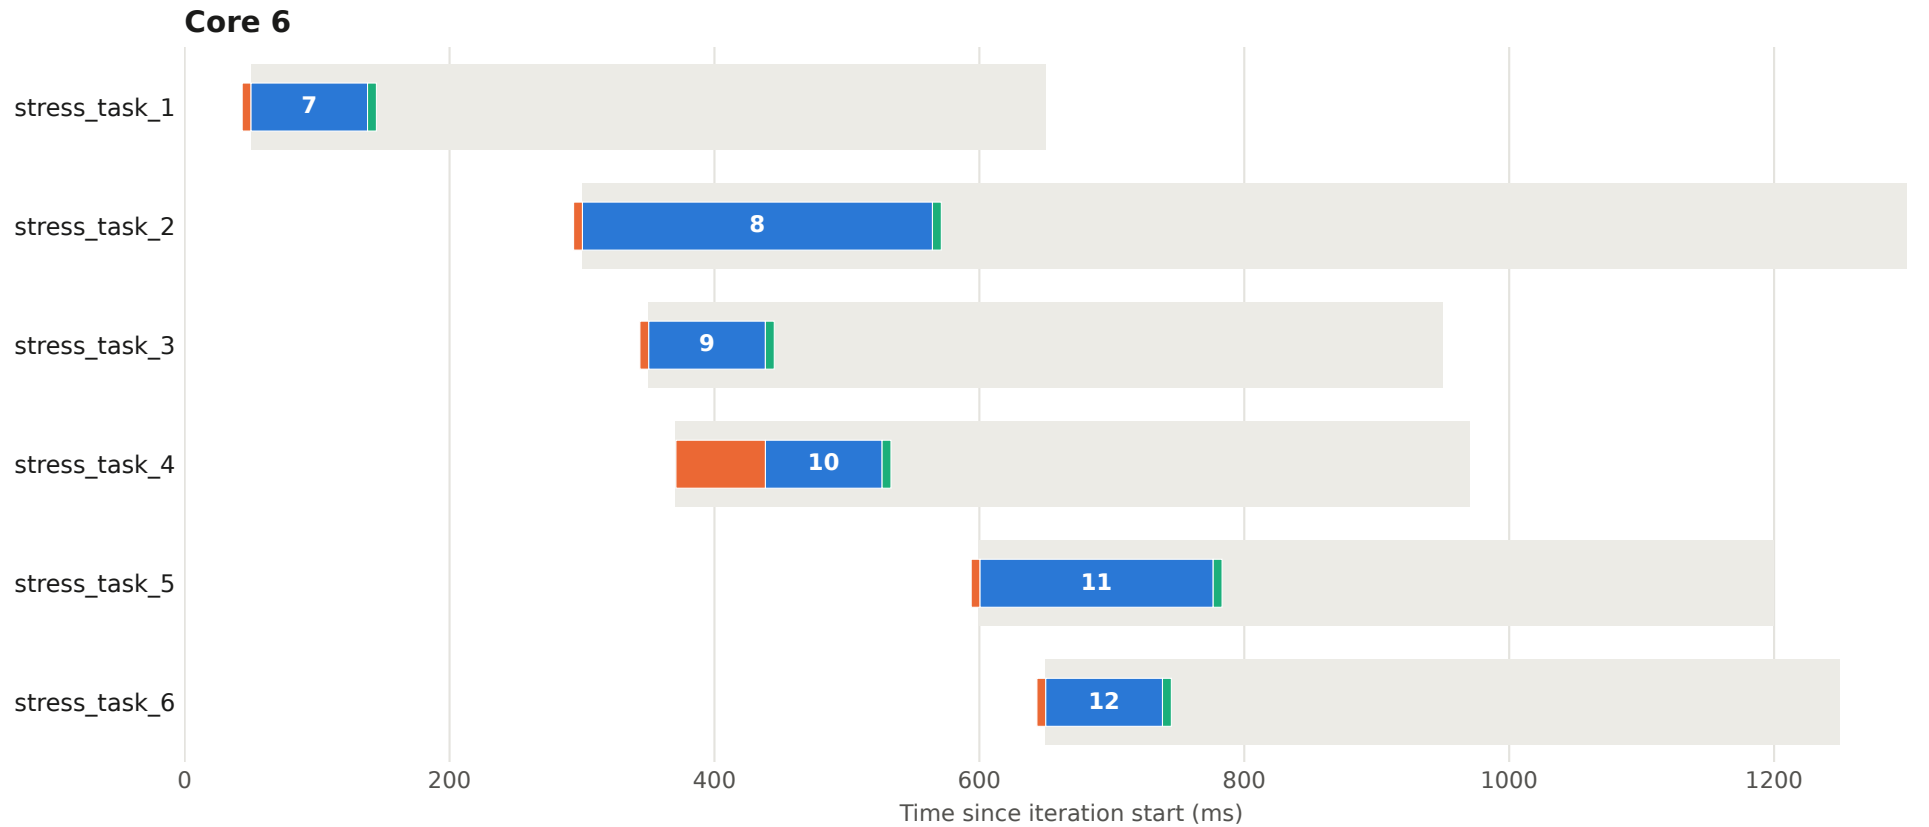


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 53 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

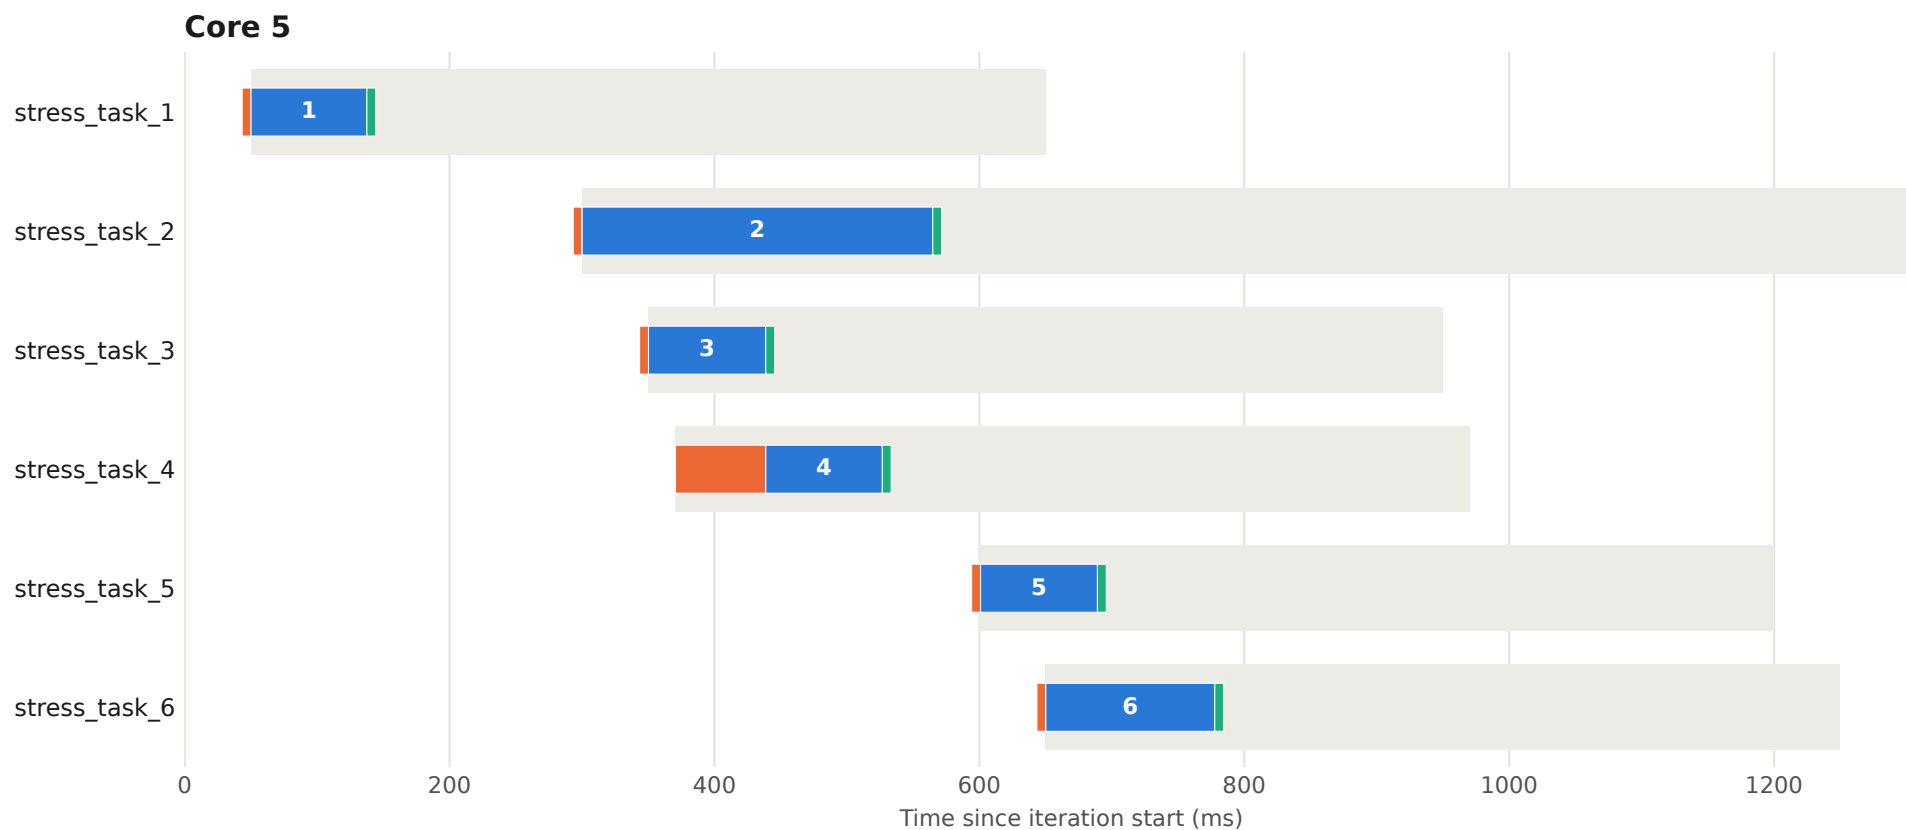


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 53 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

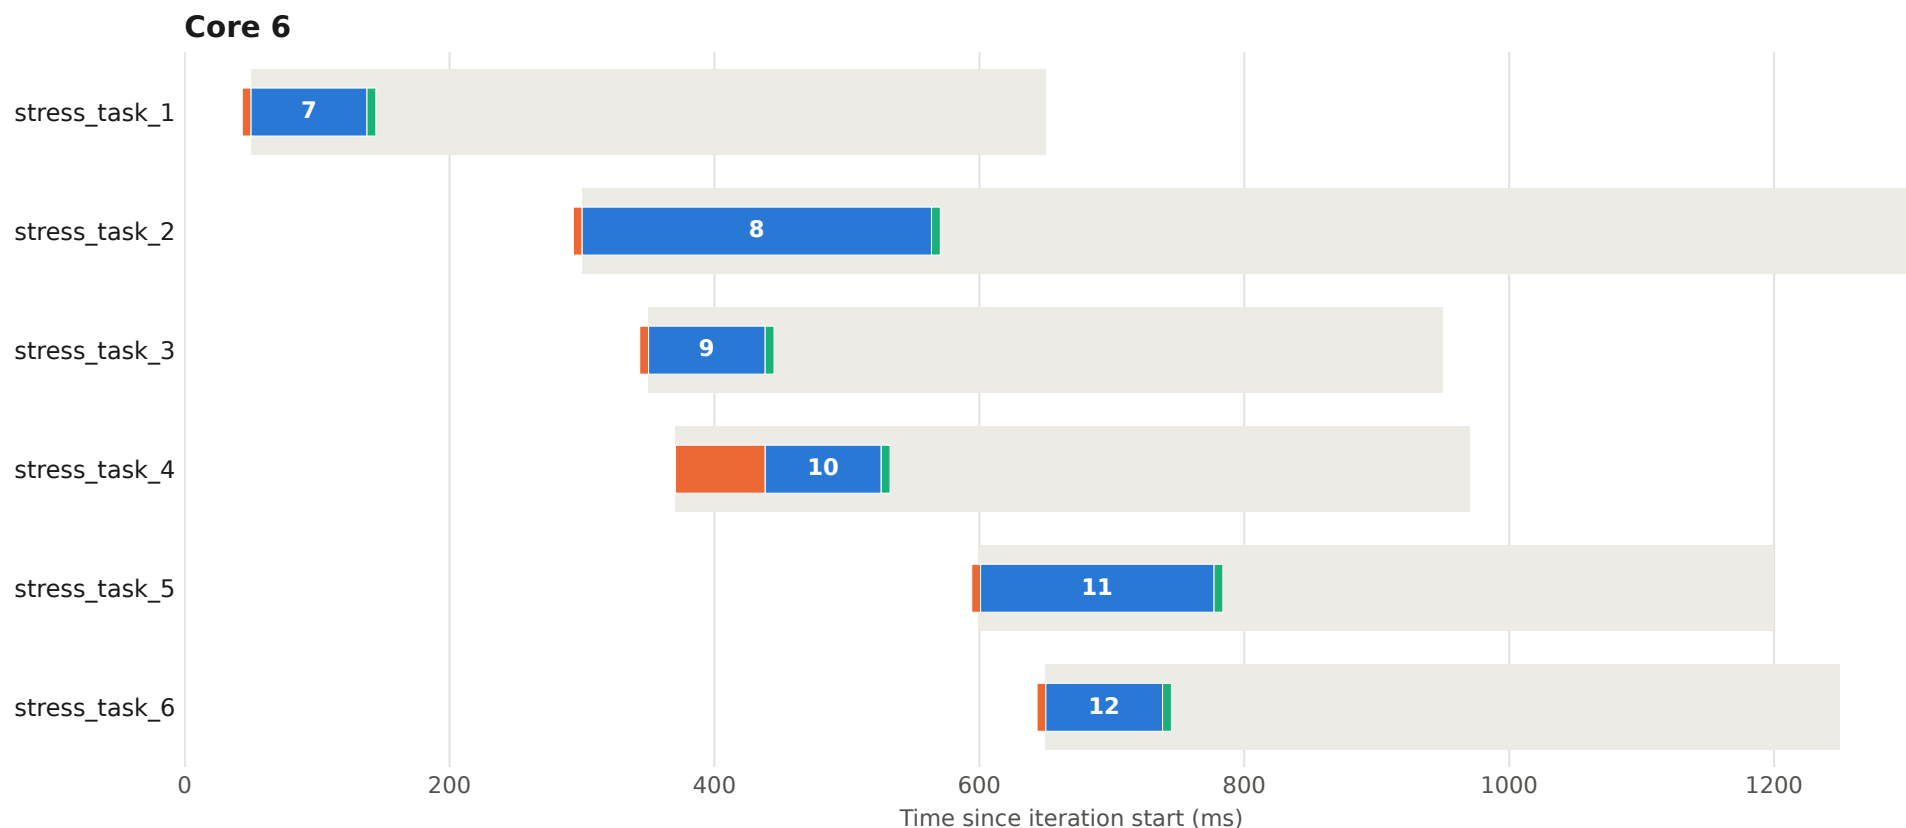


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 54 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

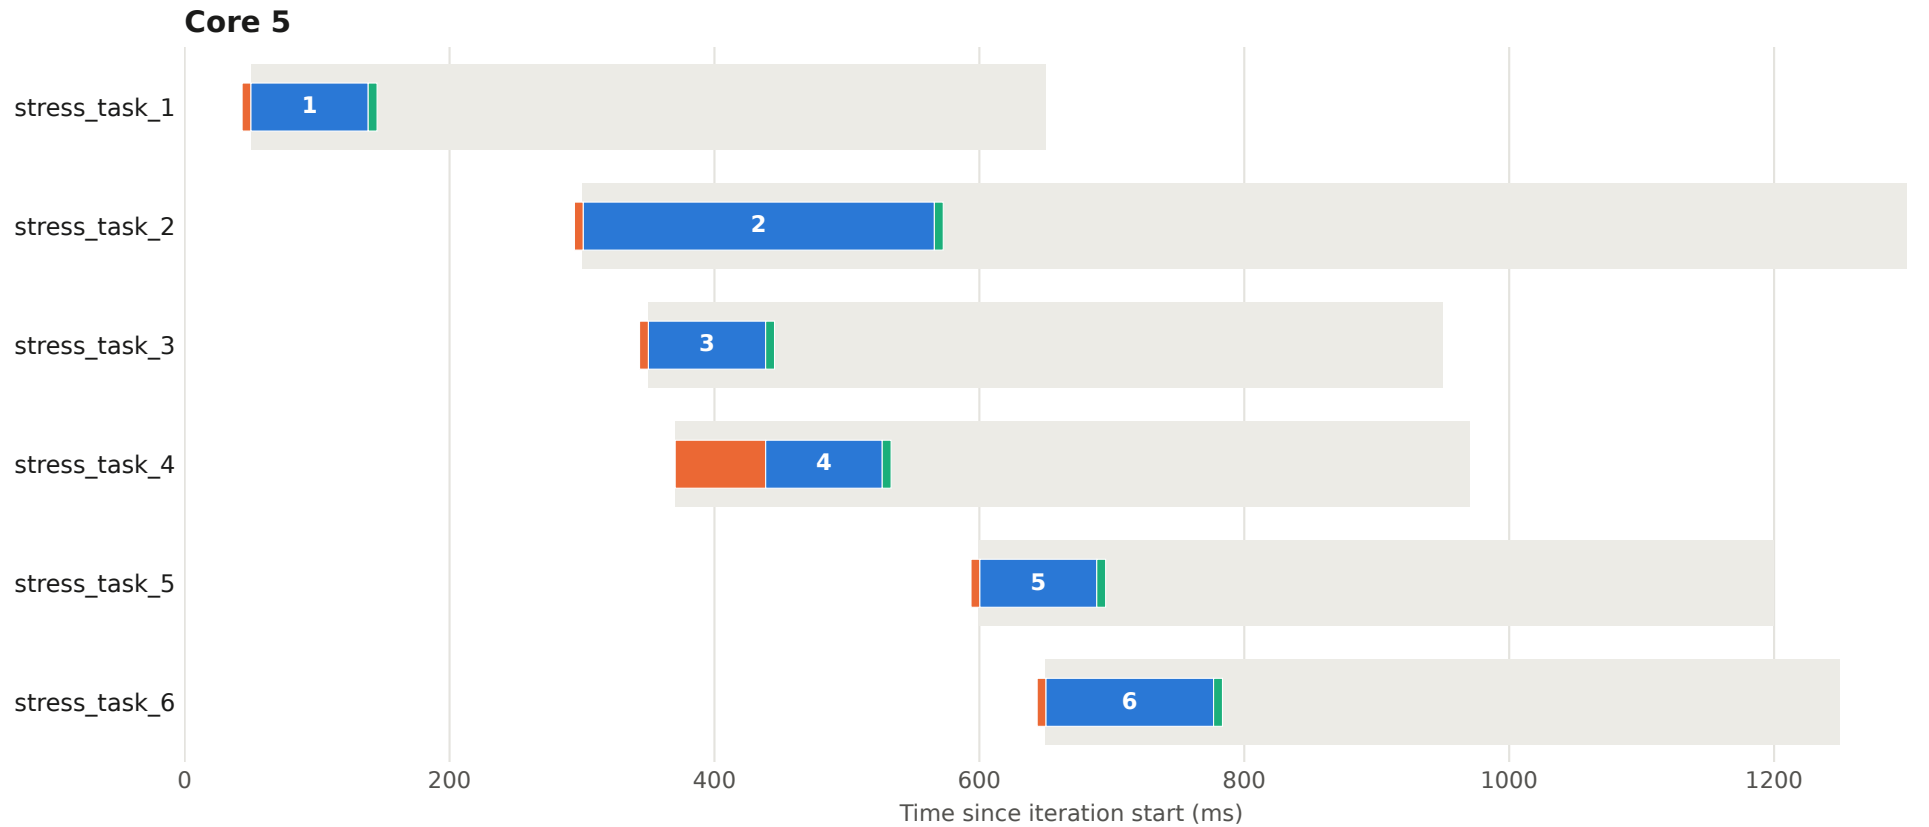


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 54 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

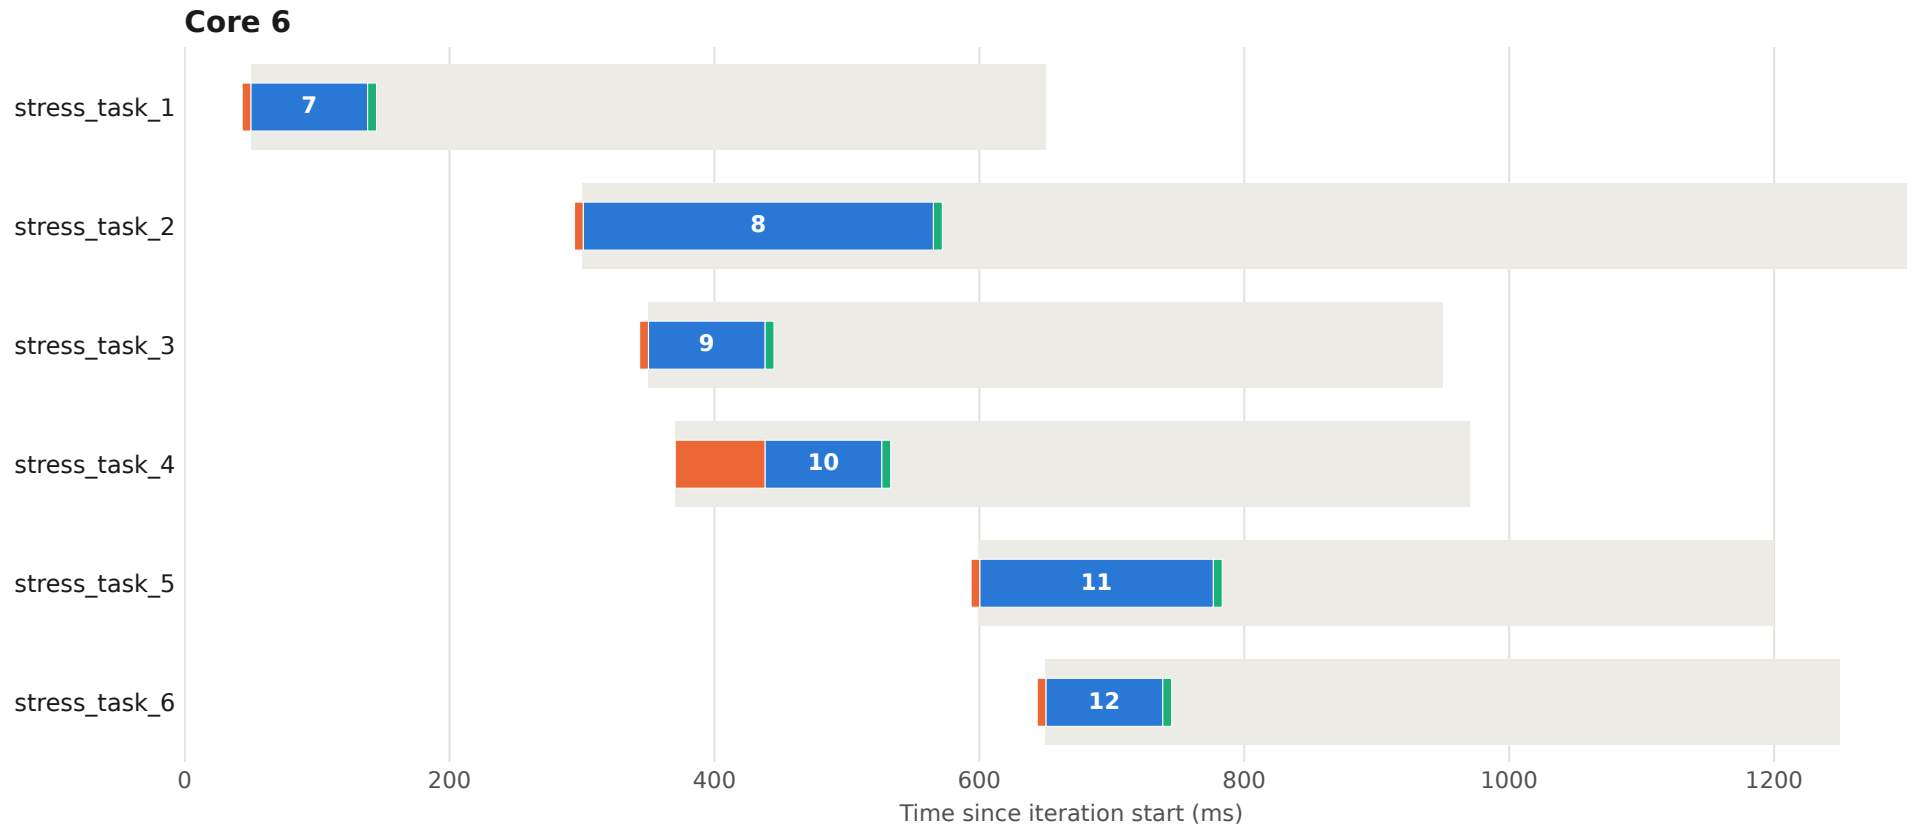


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 55 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

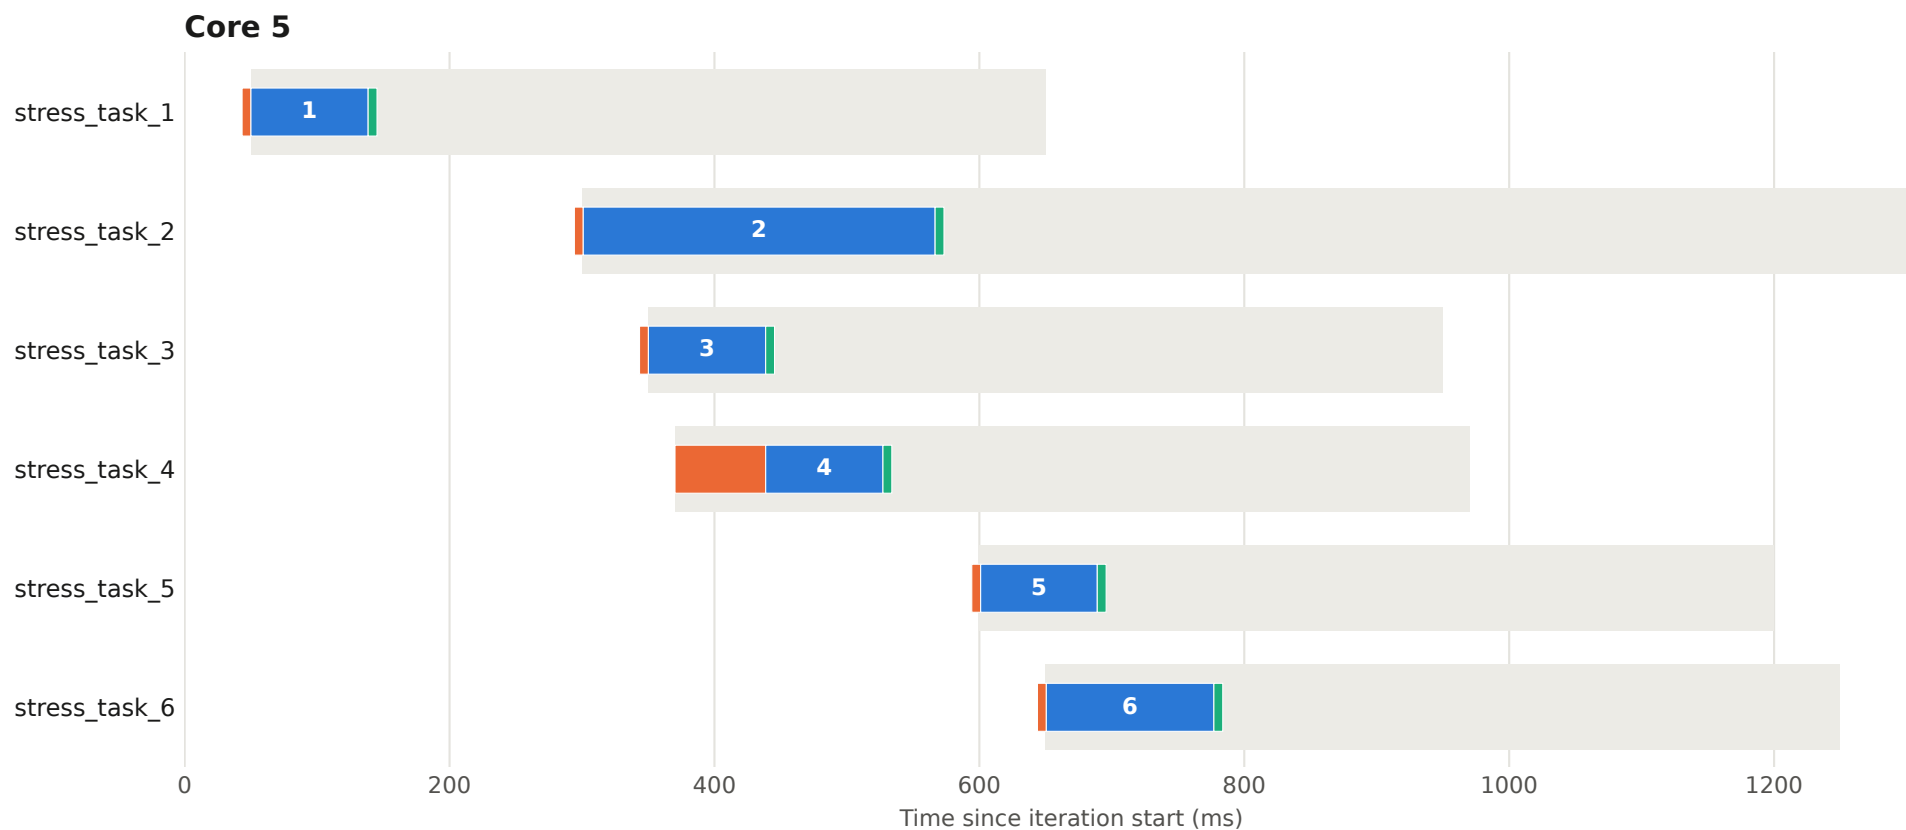


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 55 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

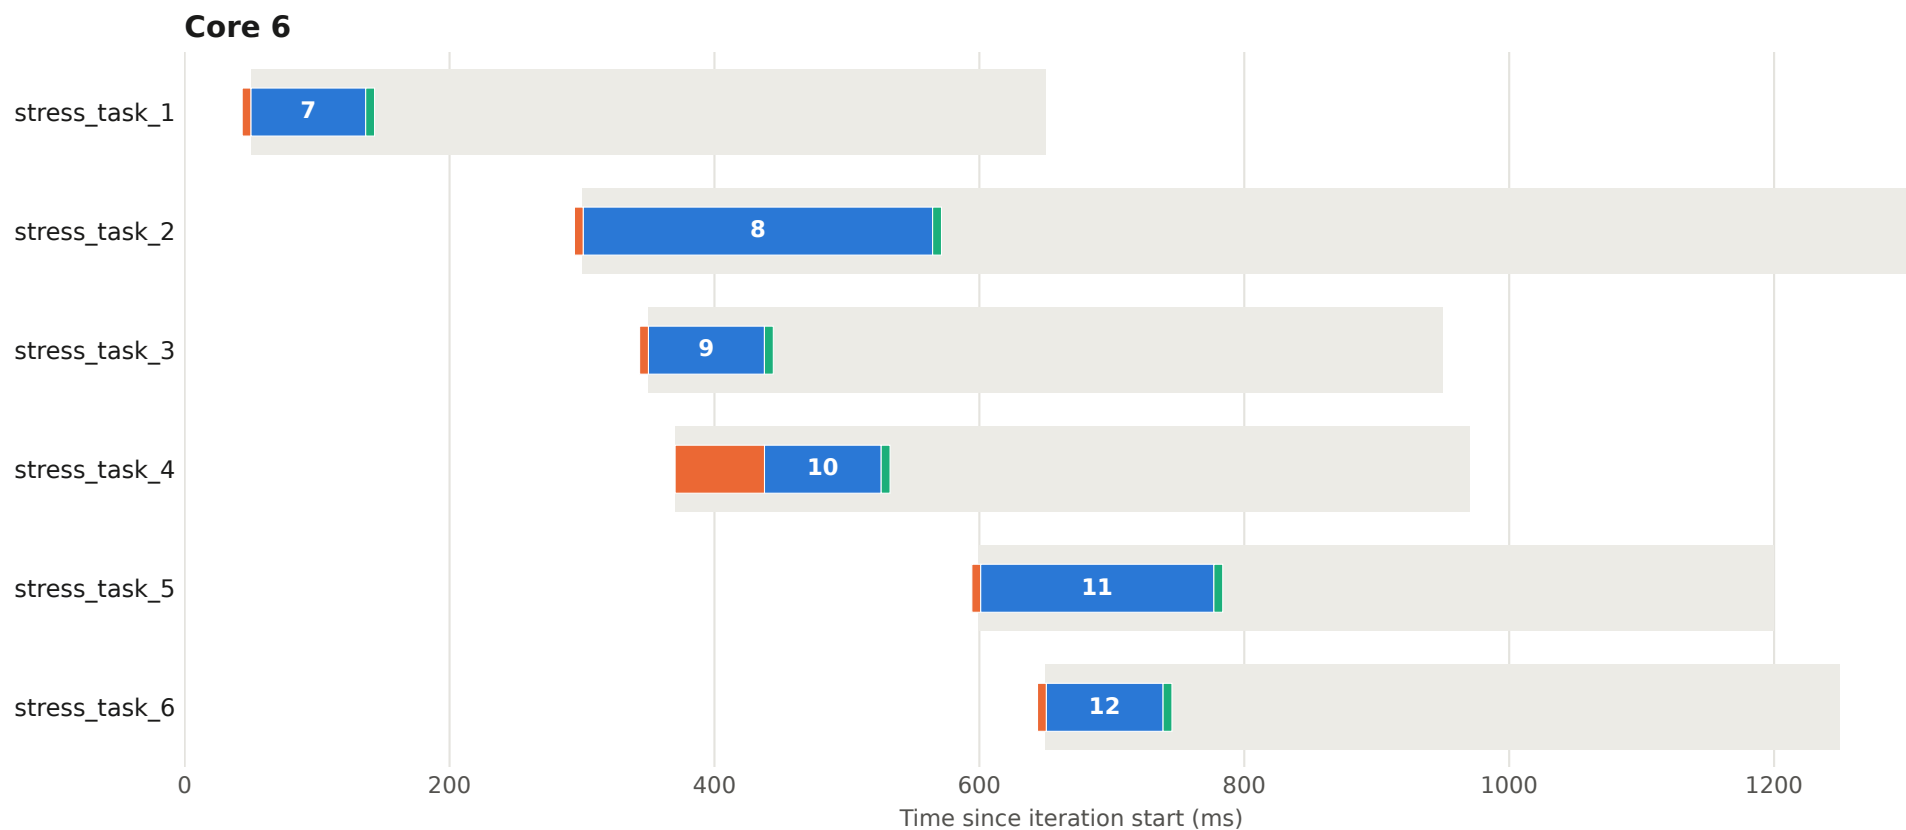


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 56 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

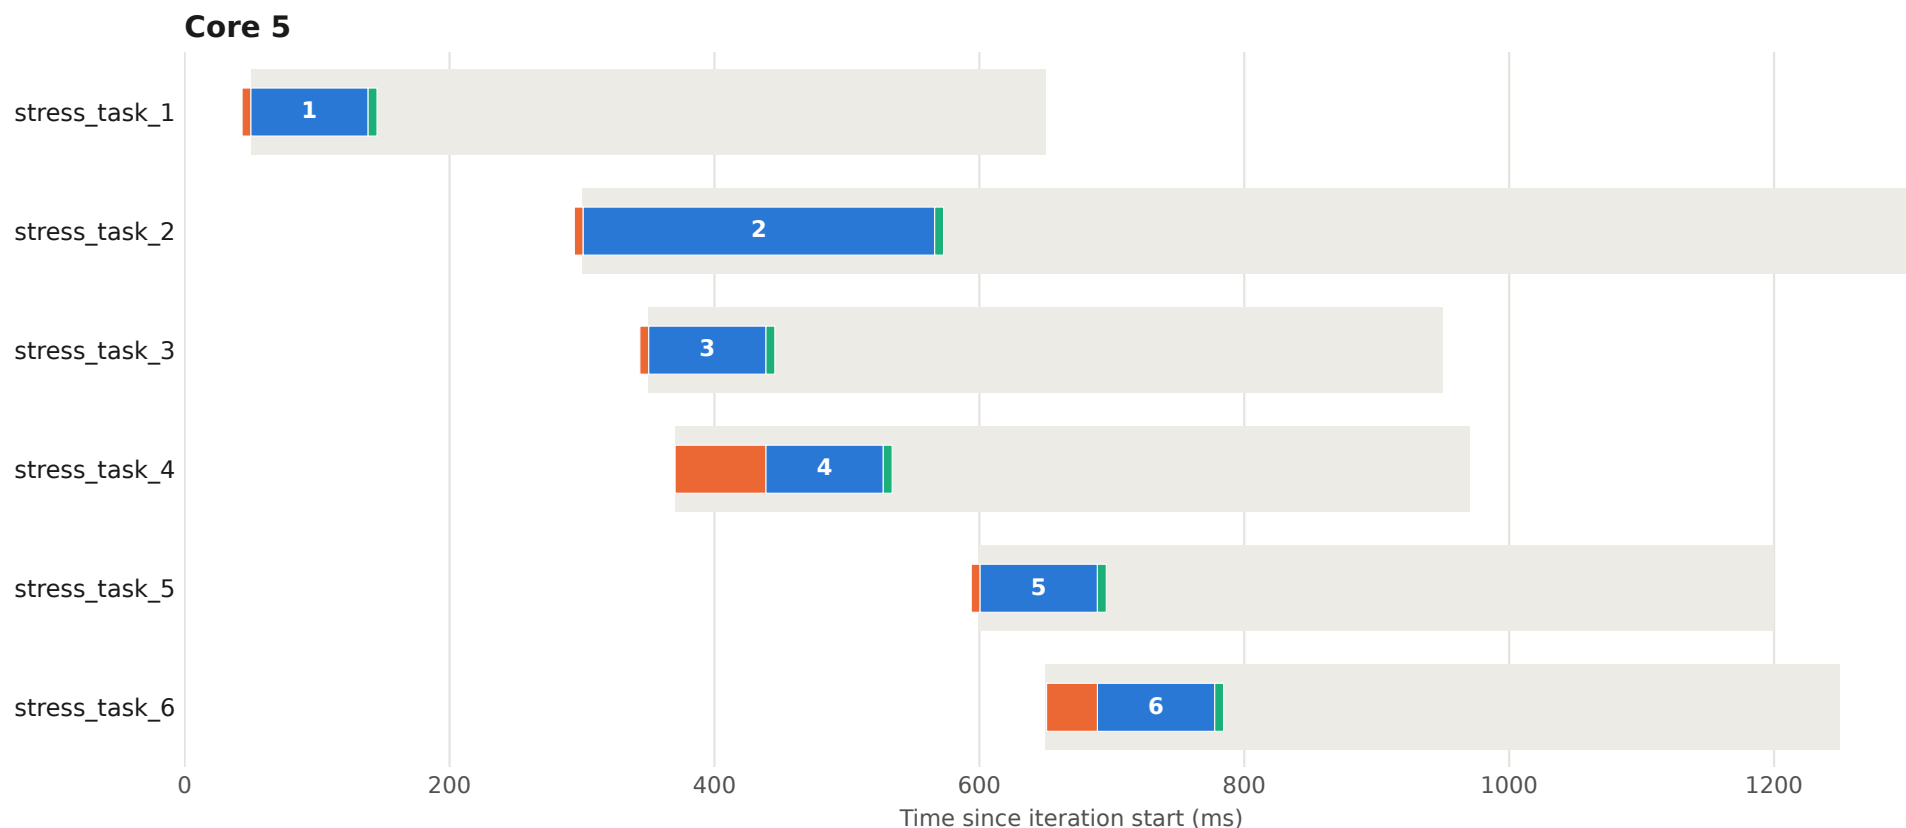


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 56 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

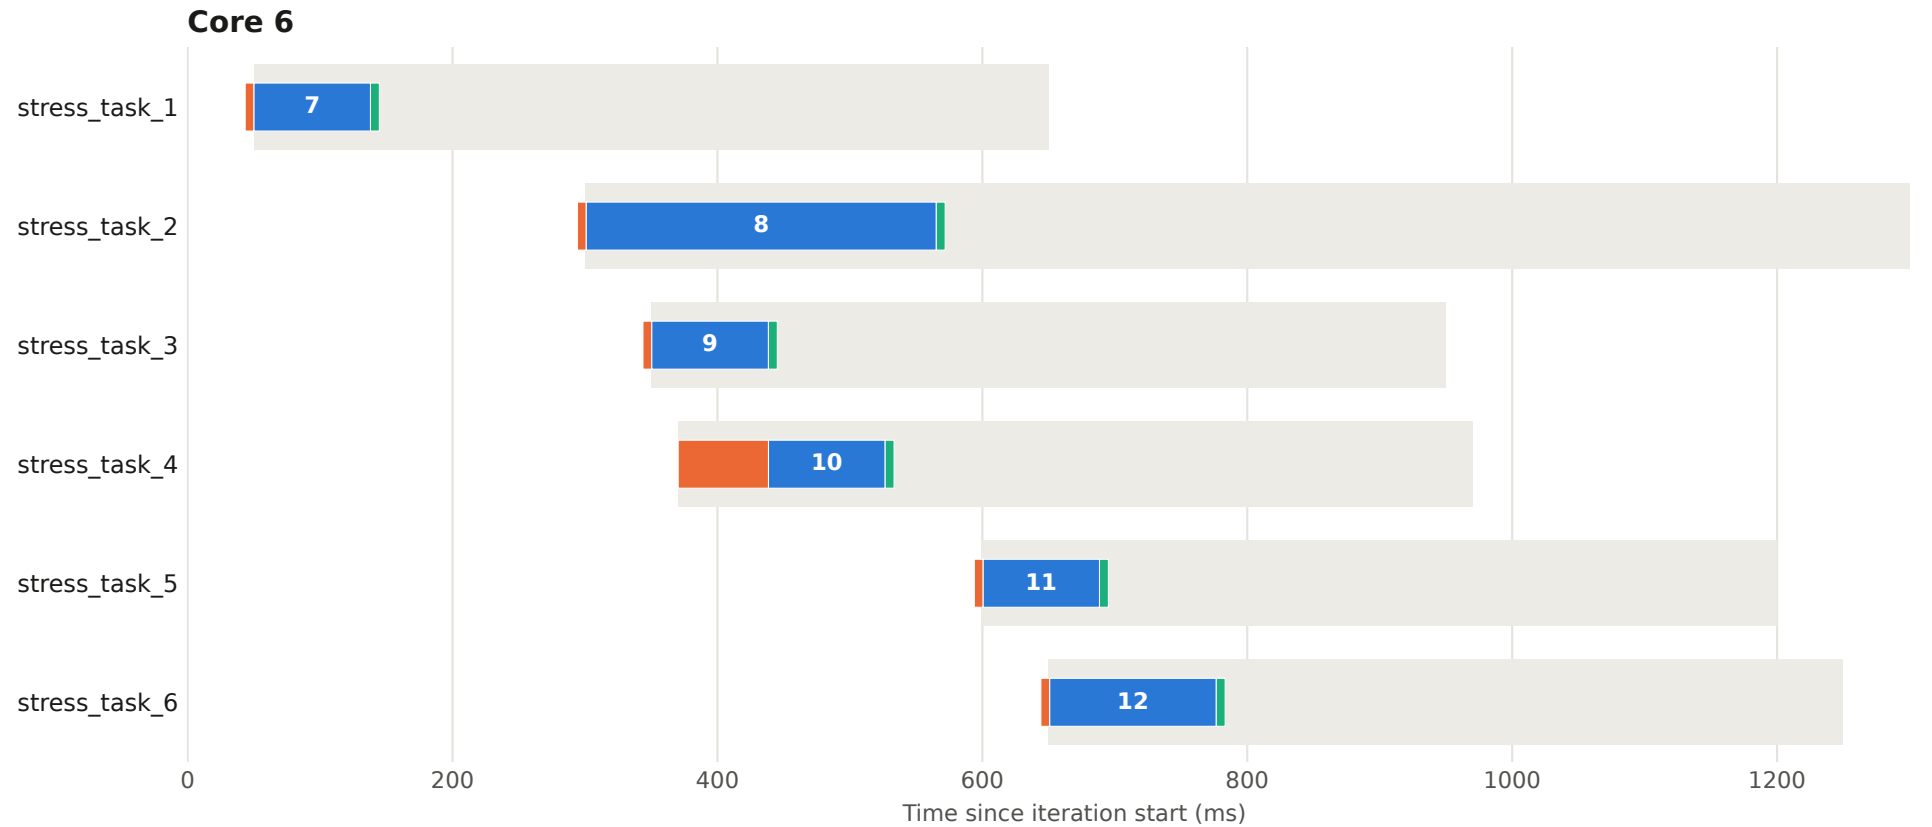


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 57 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

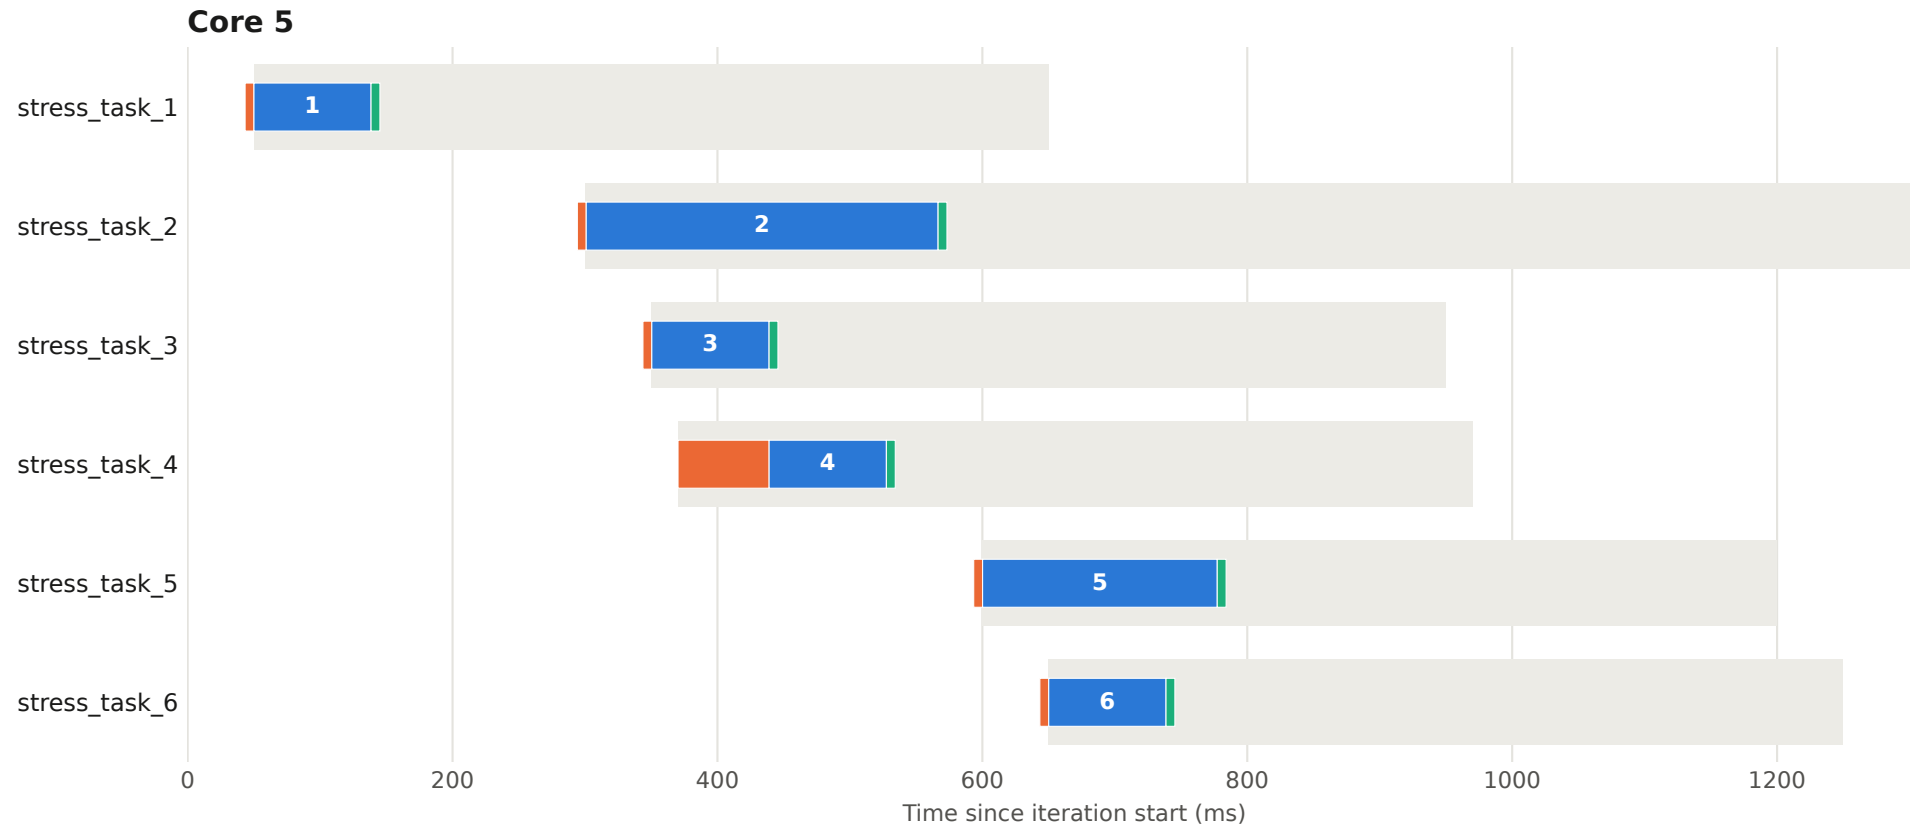


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 57 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

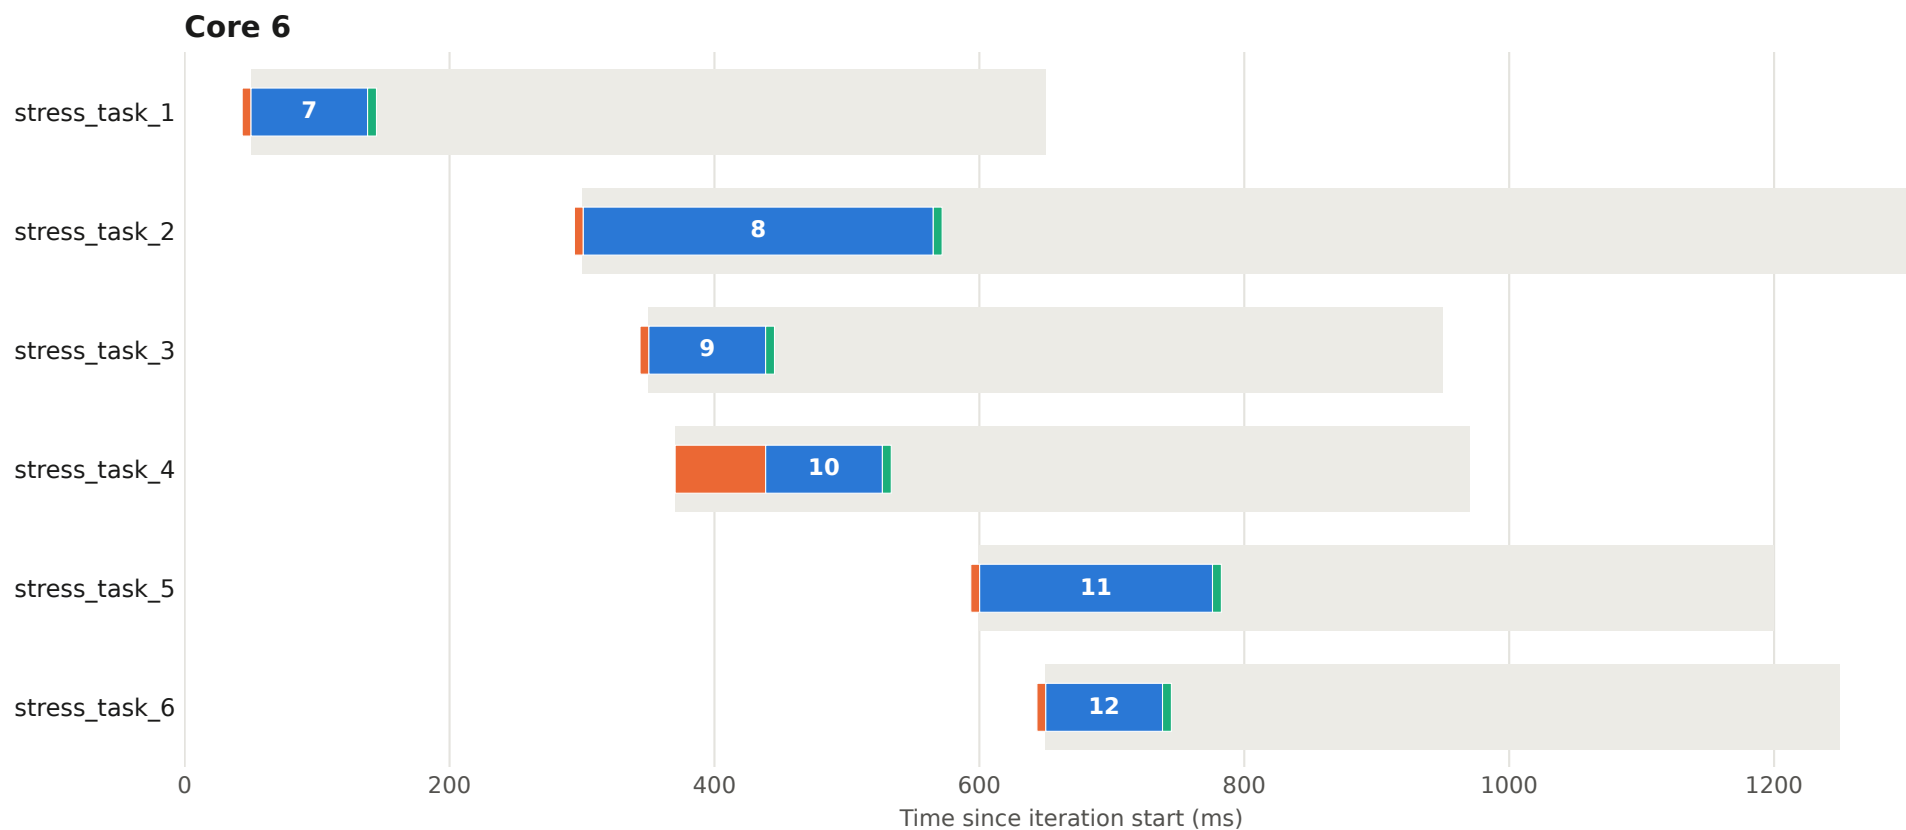


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 58 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

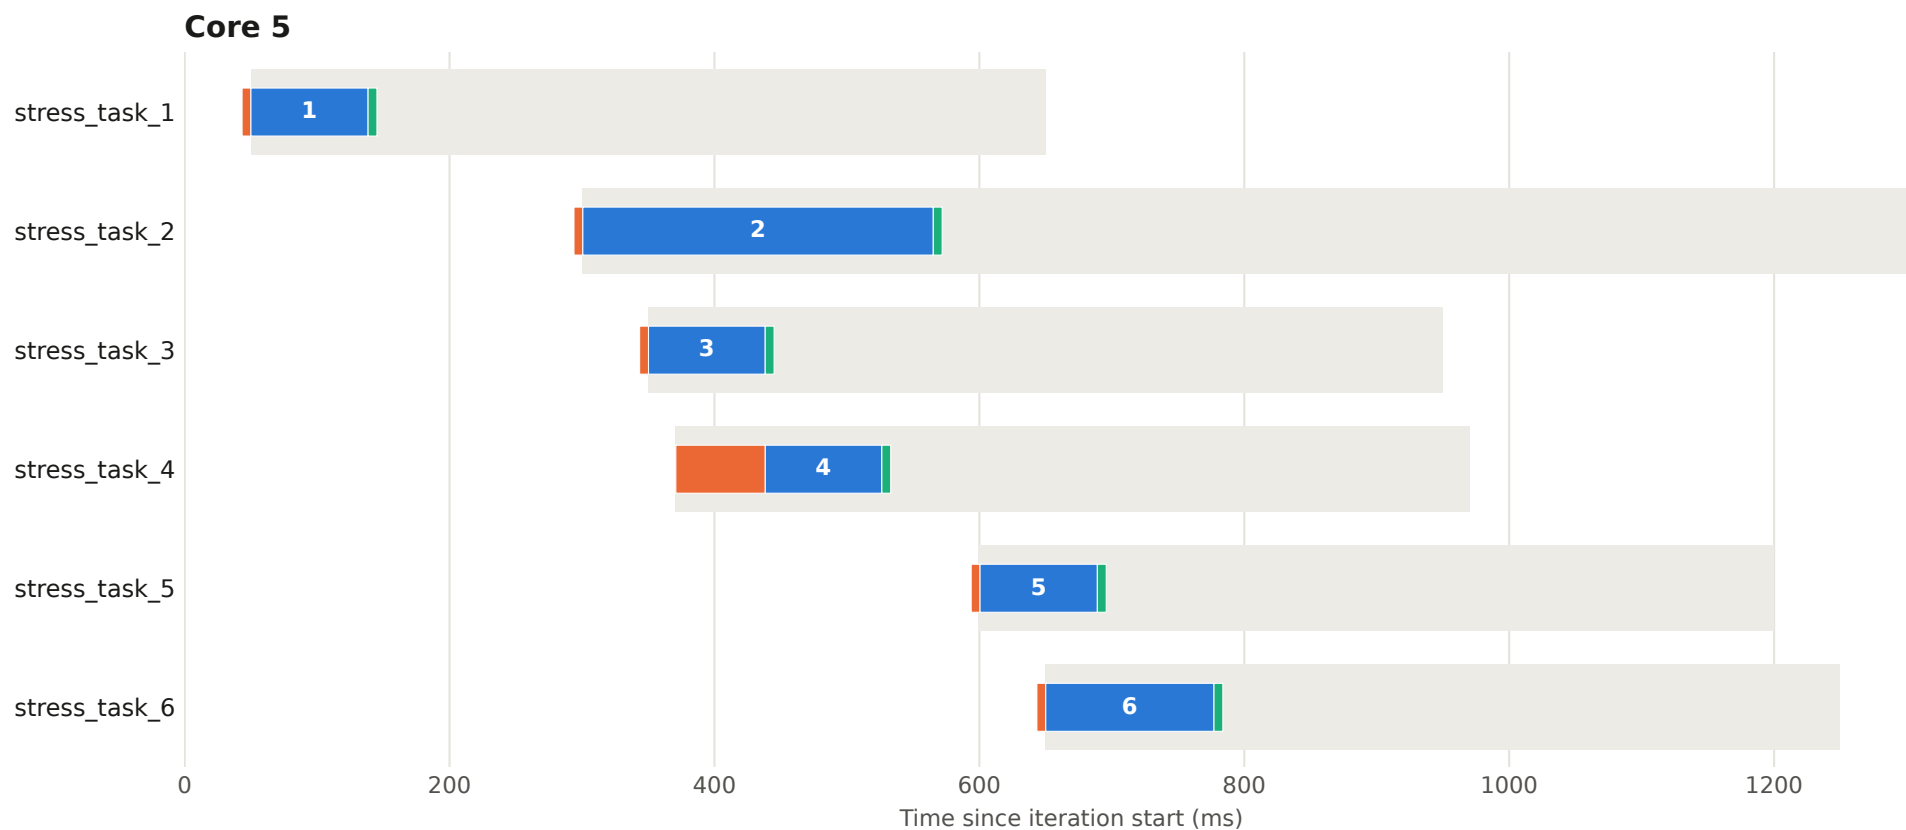


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 58 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

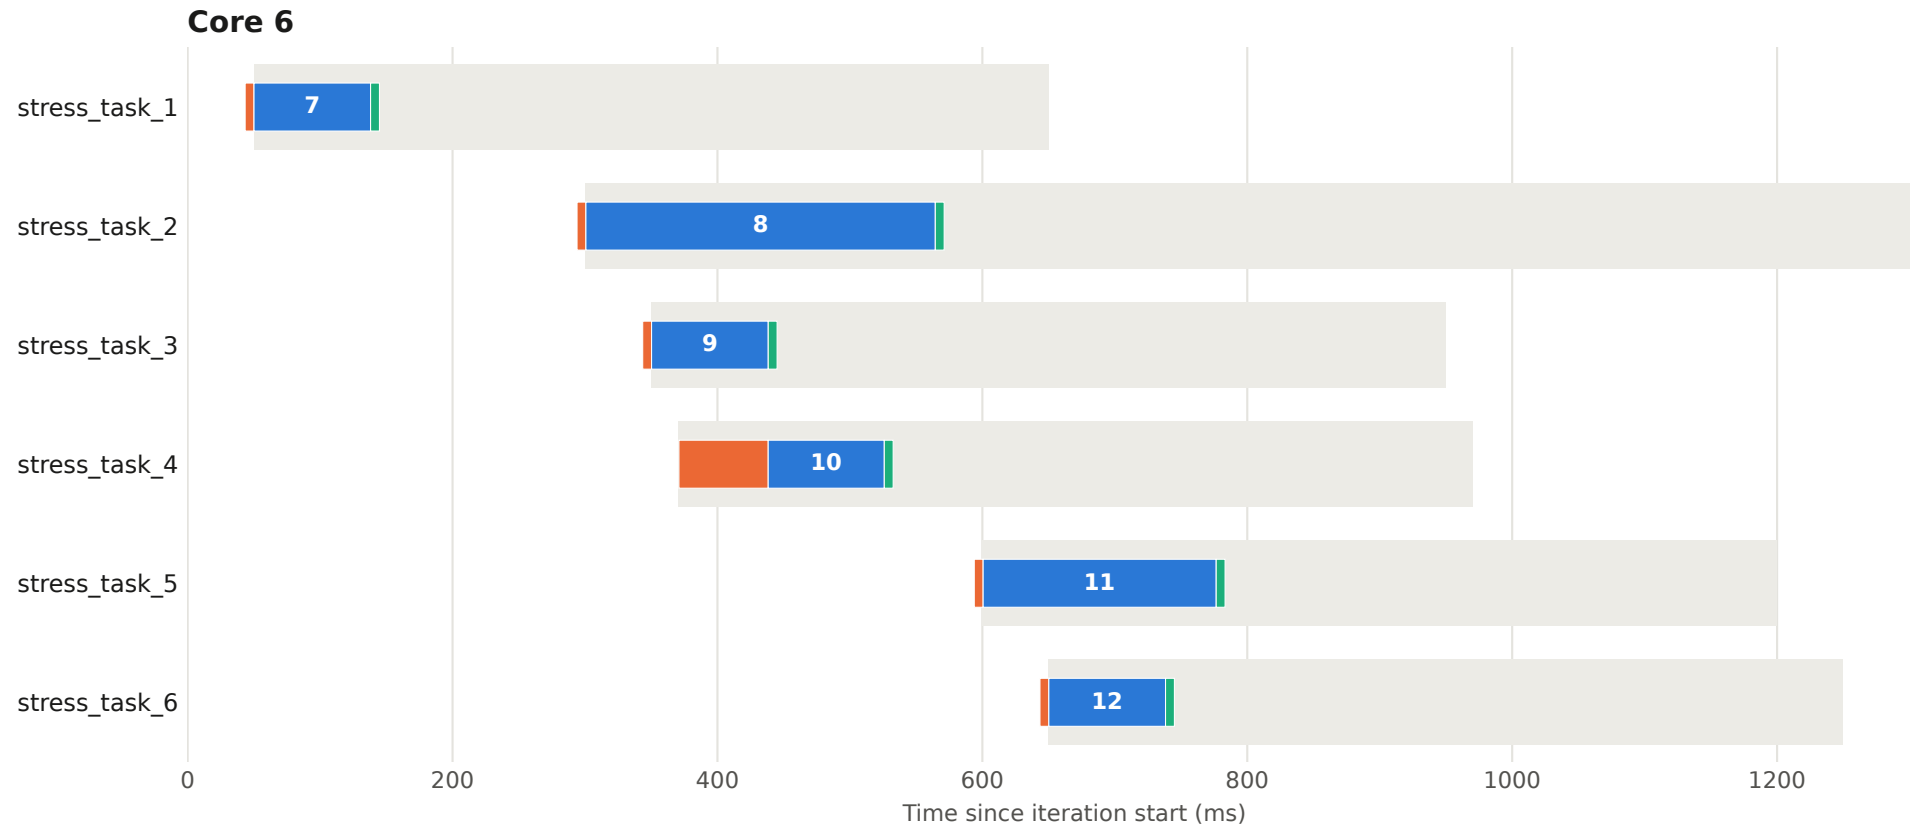


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 59 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

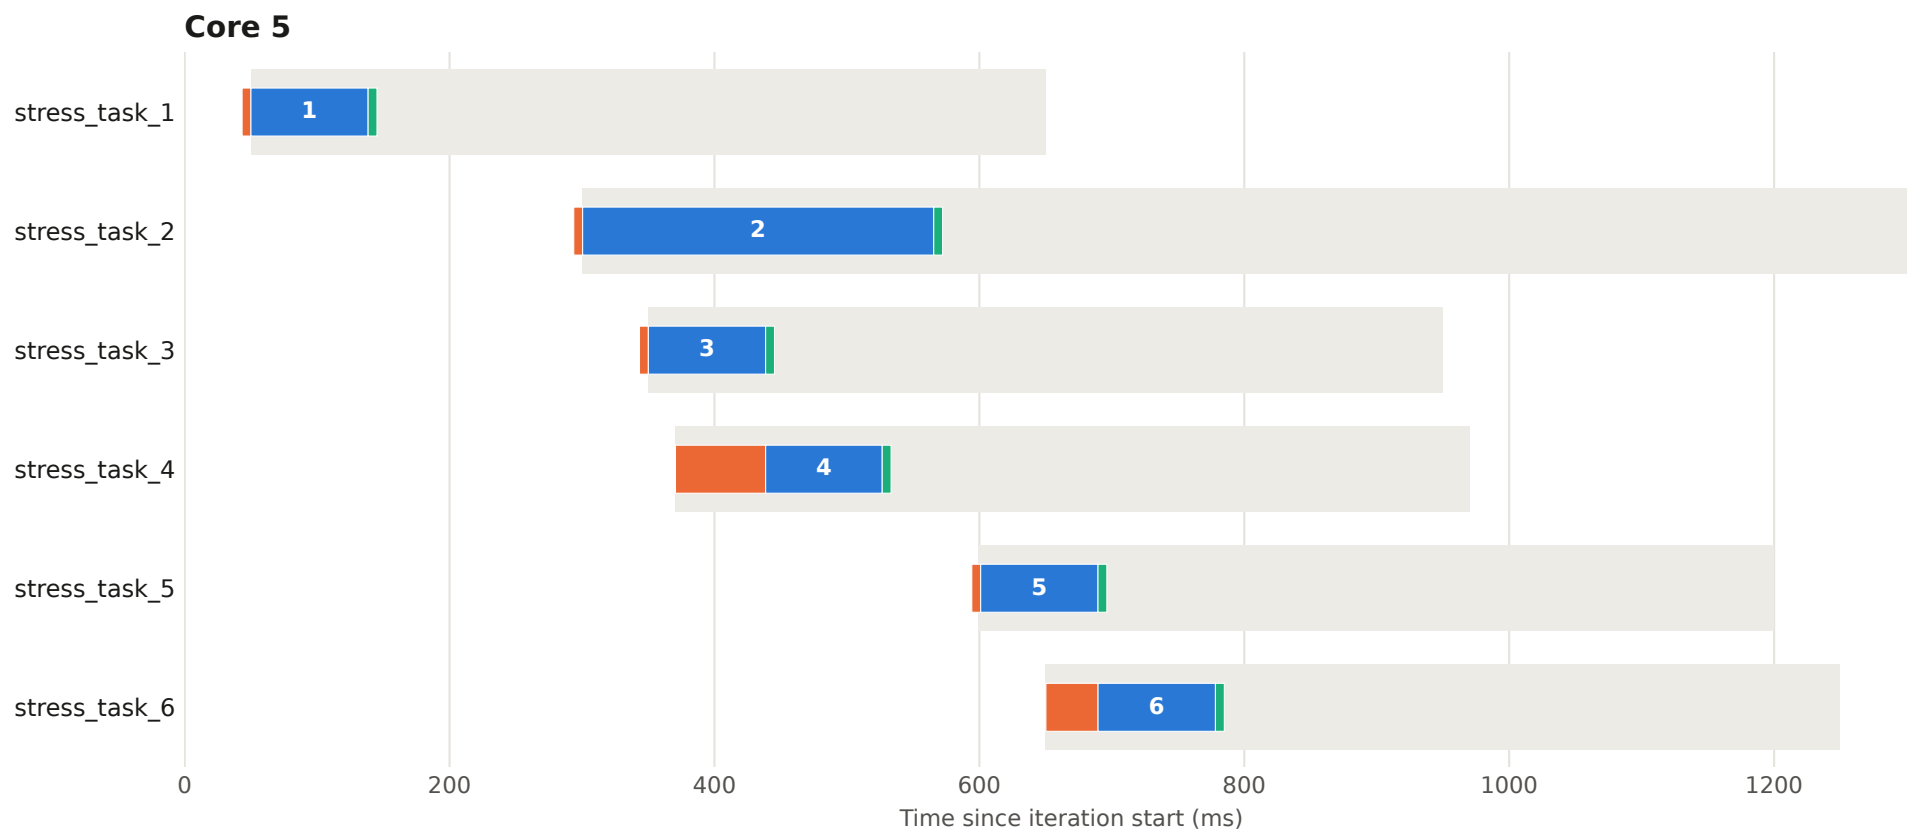


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 59 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

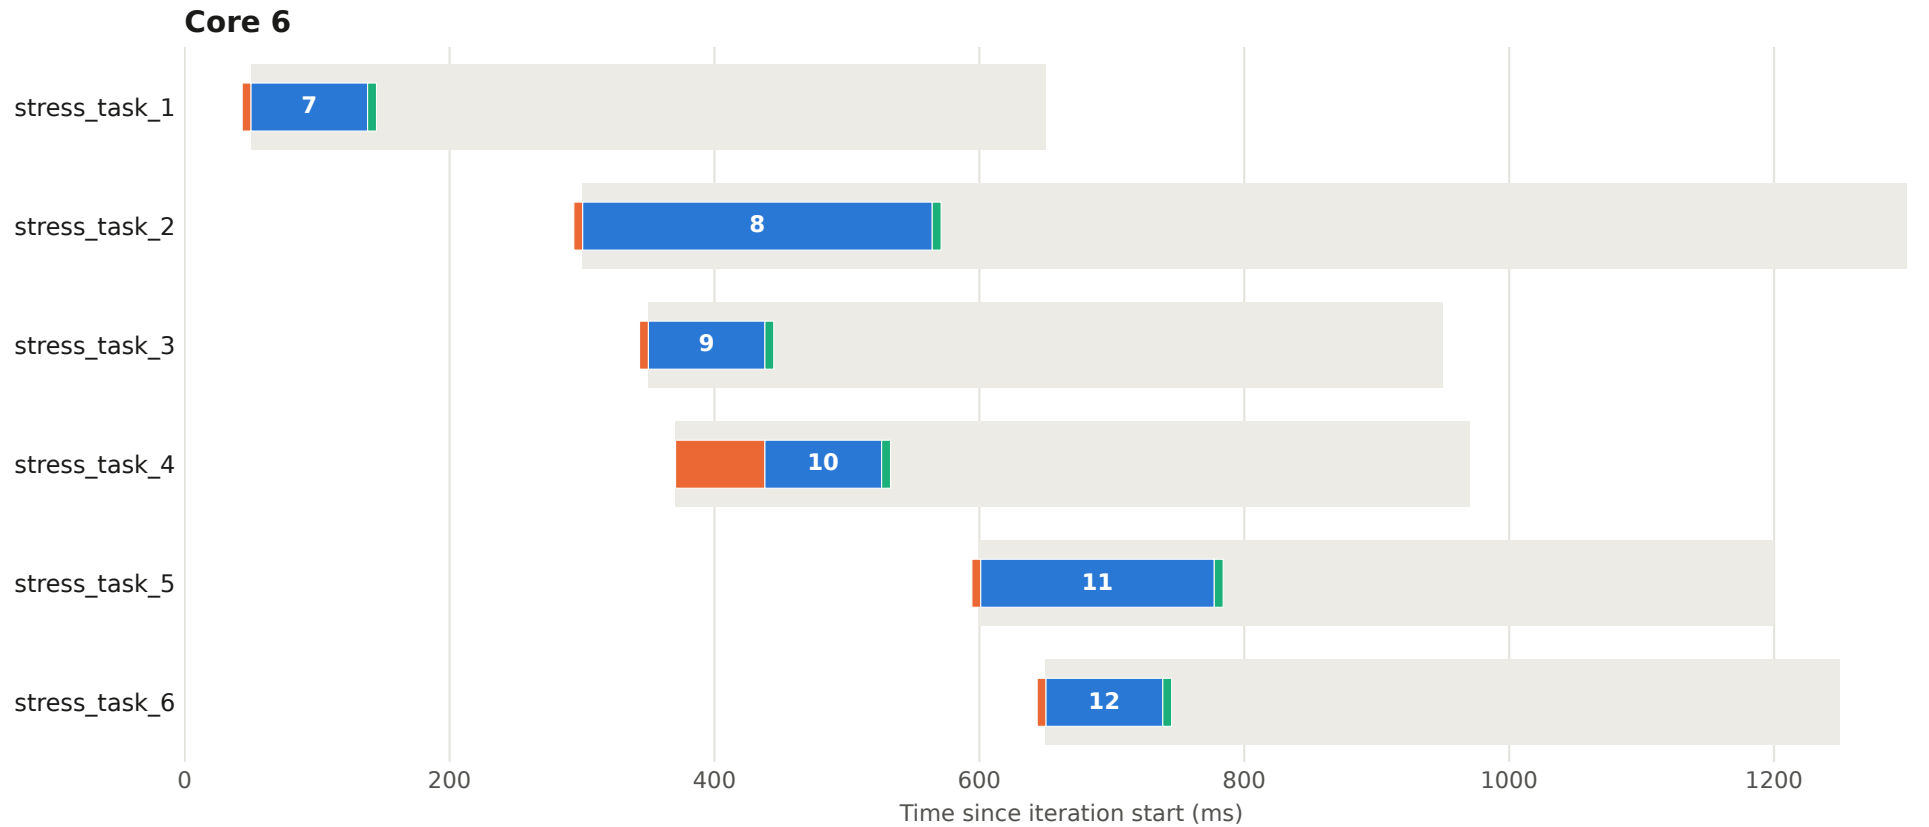


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 60 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

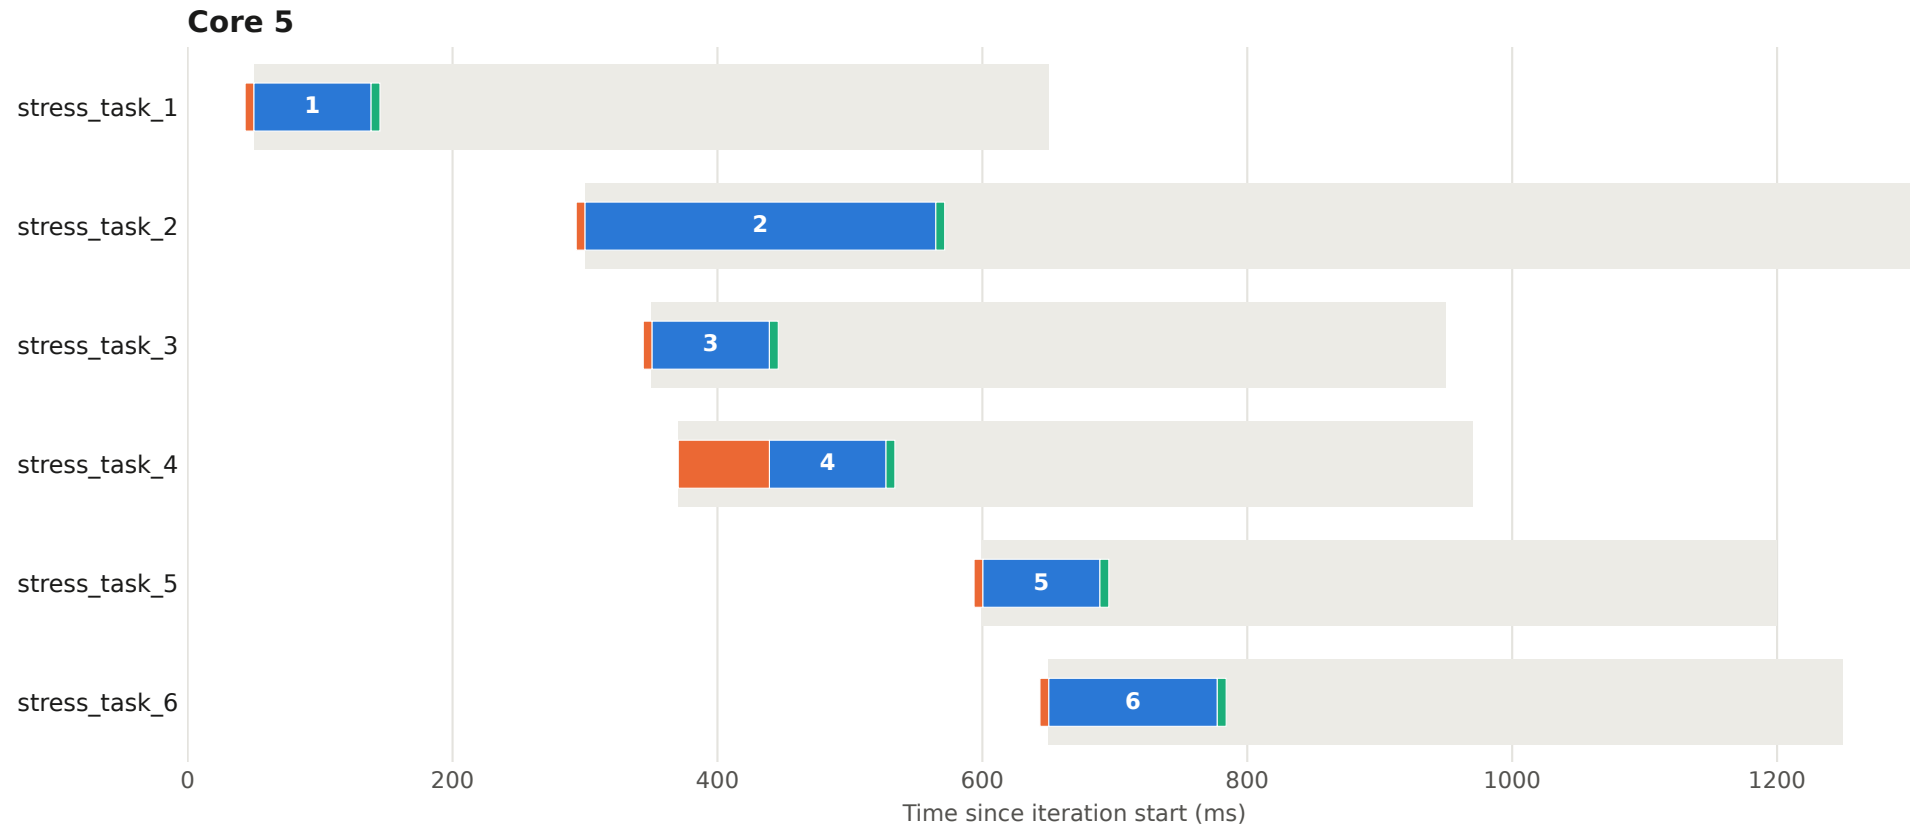


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 60 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

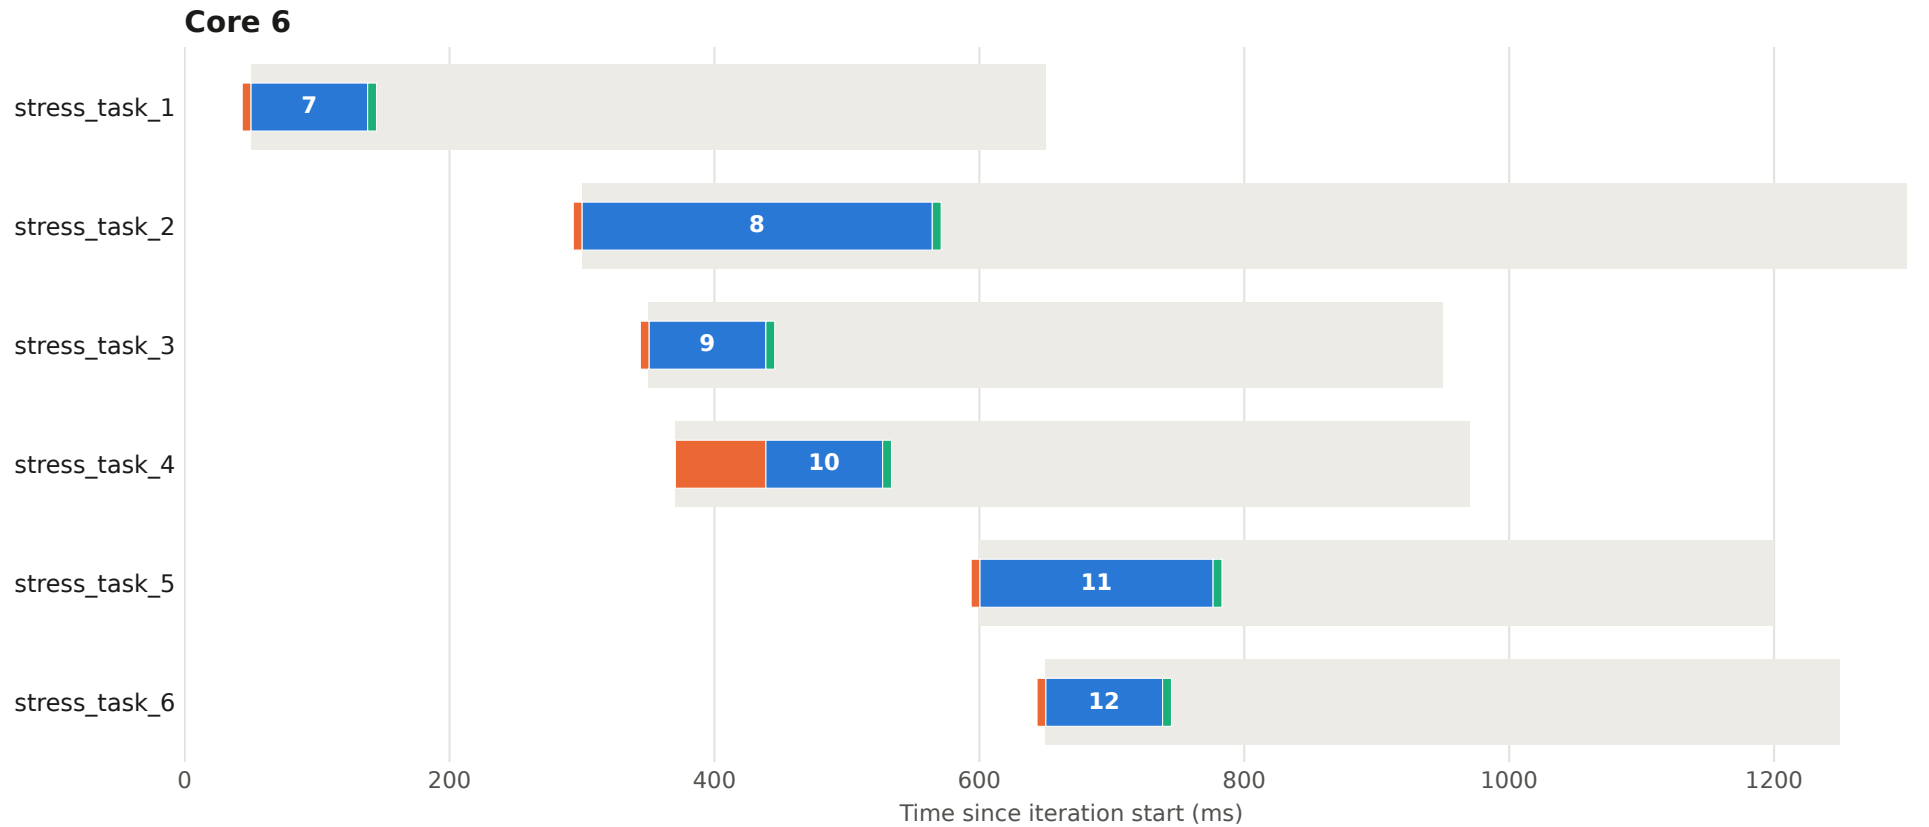


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 61 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

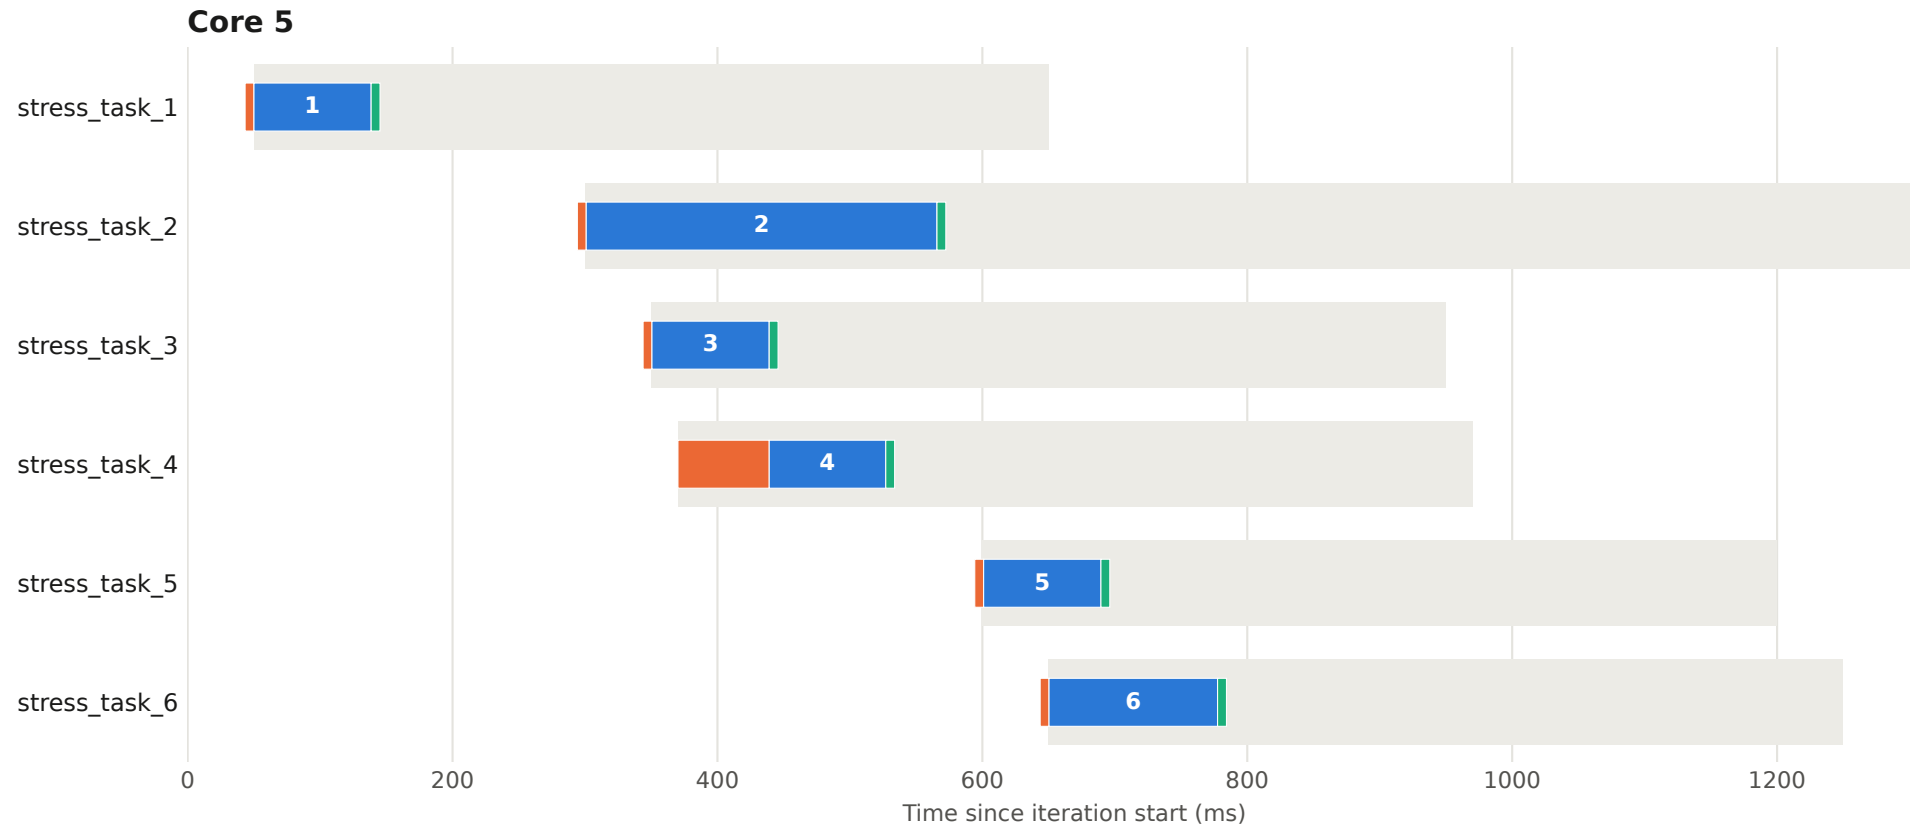


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 61 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

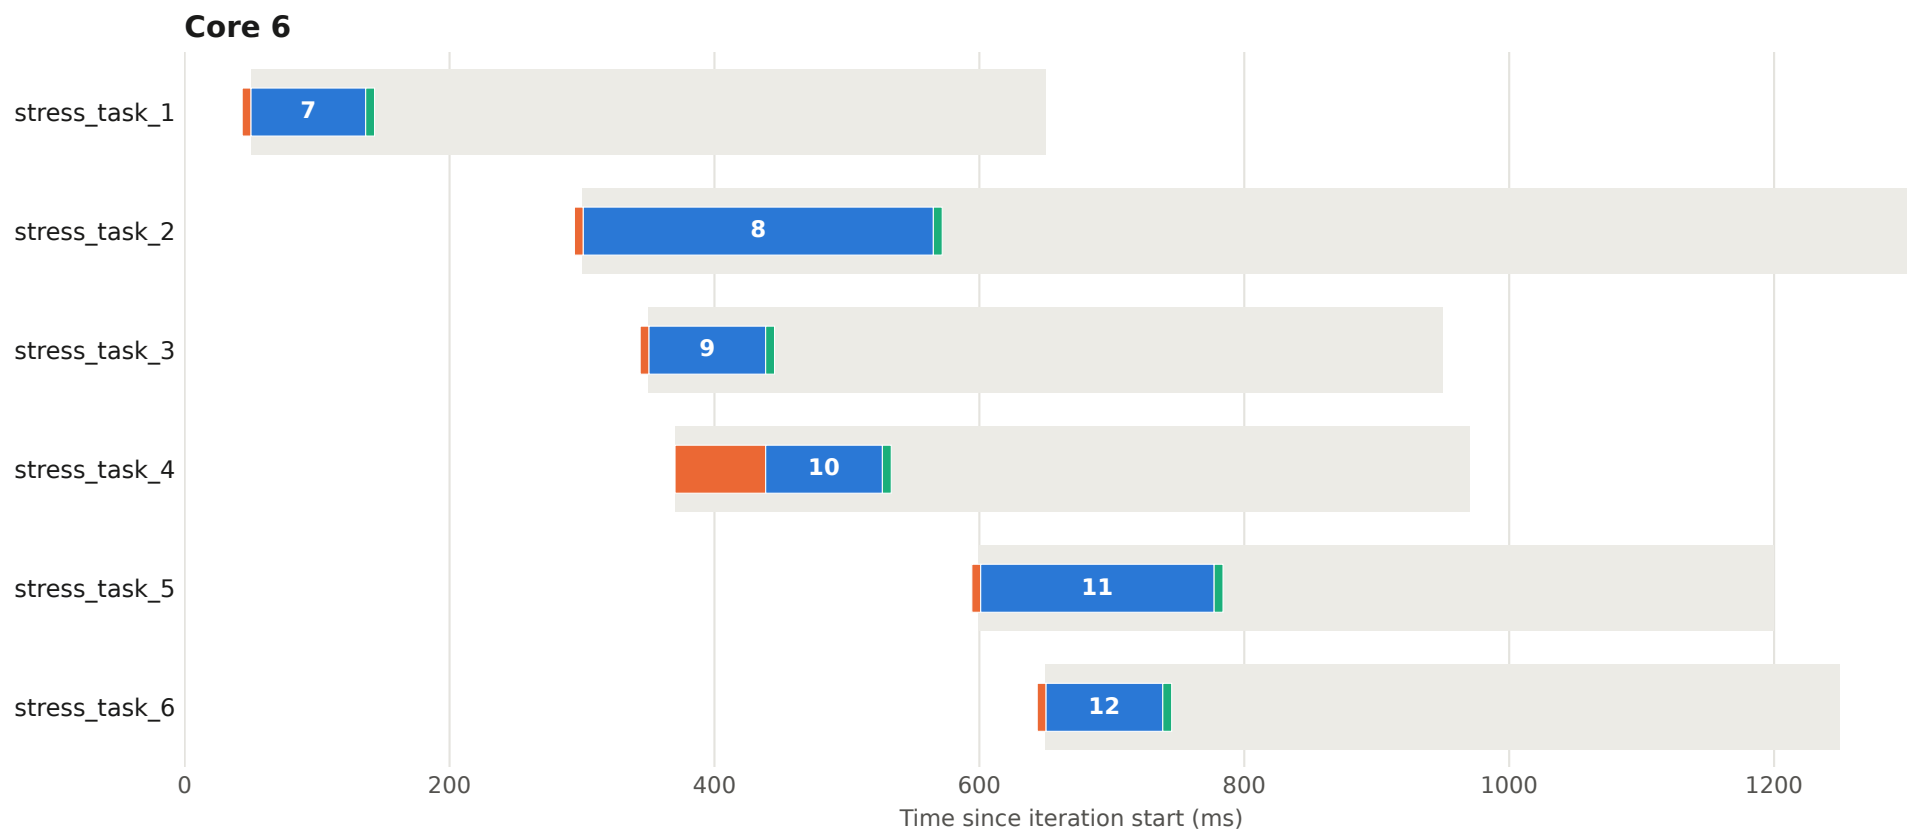


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 62 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

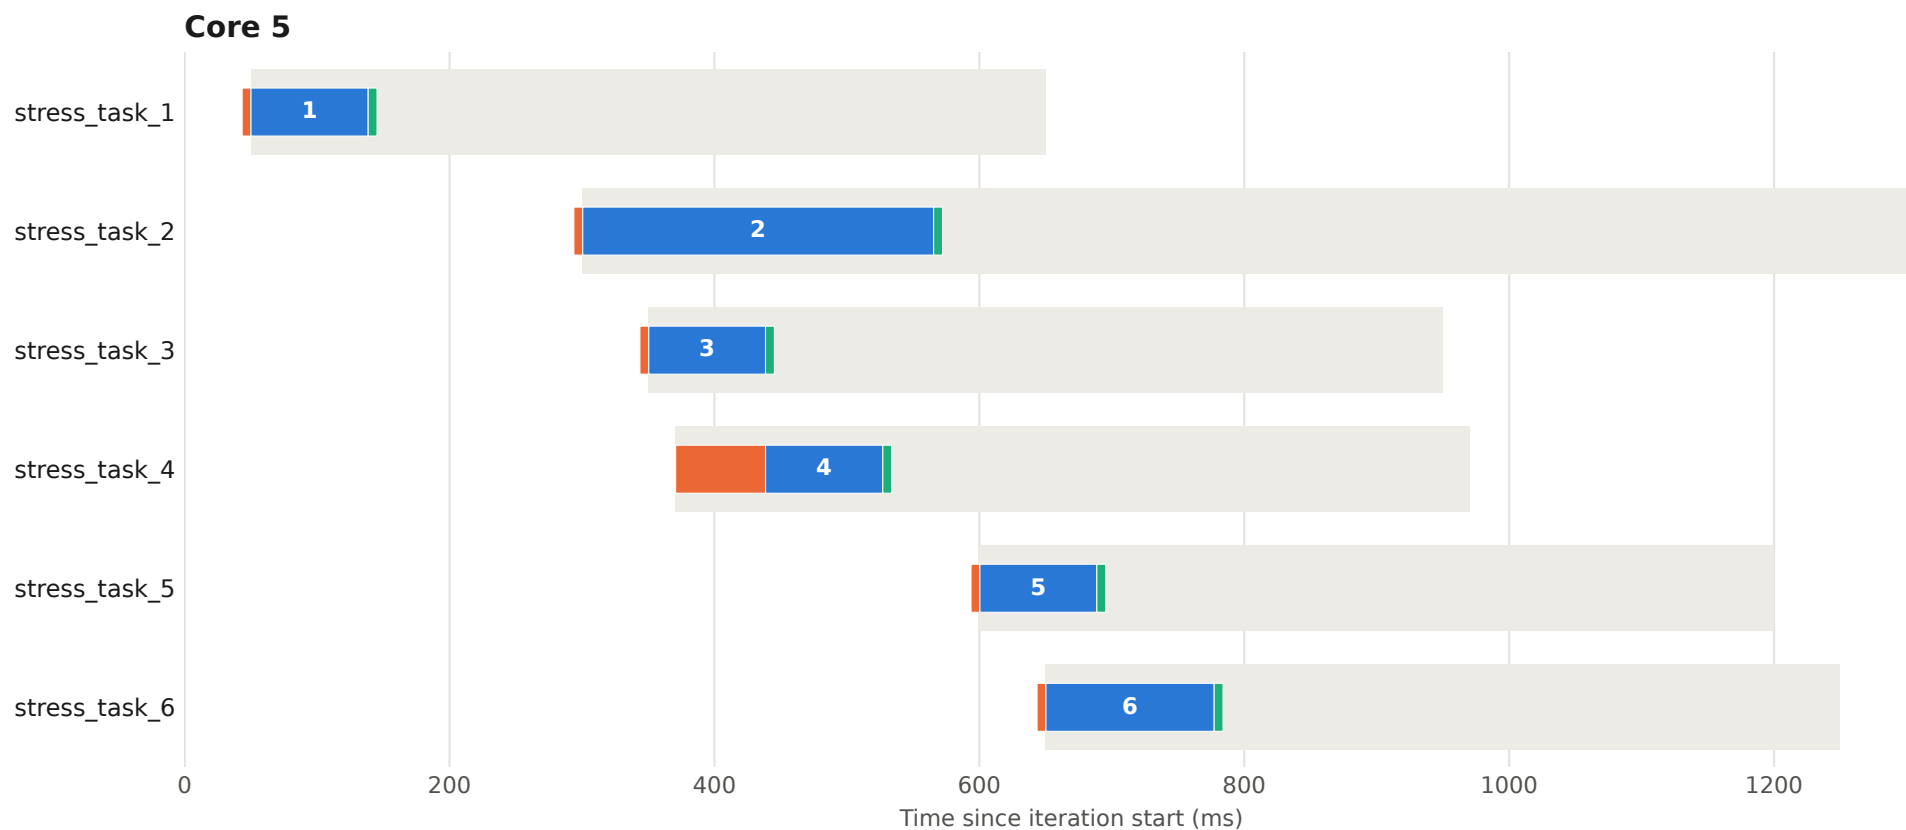


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 62 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

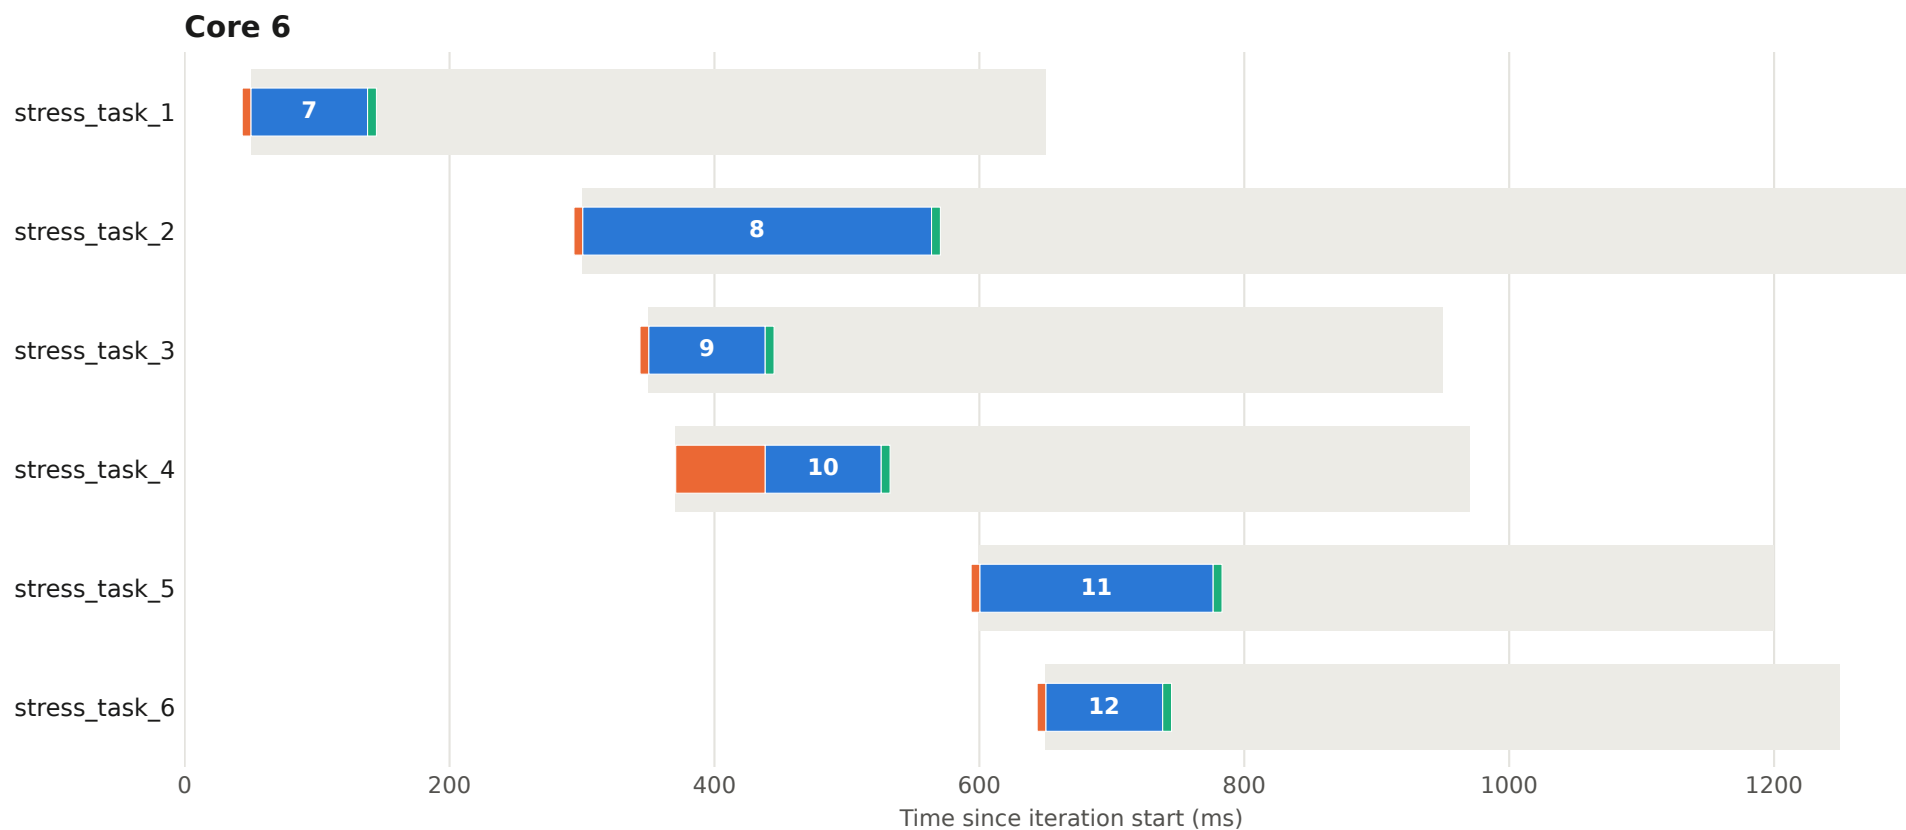


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 63 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

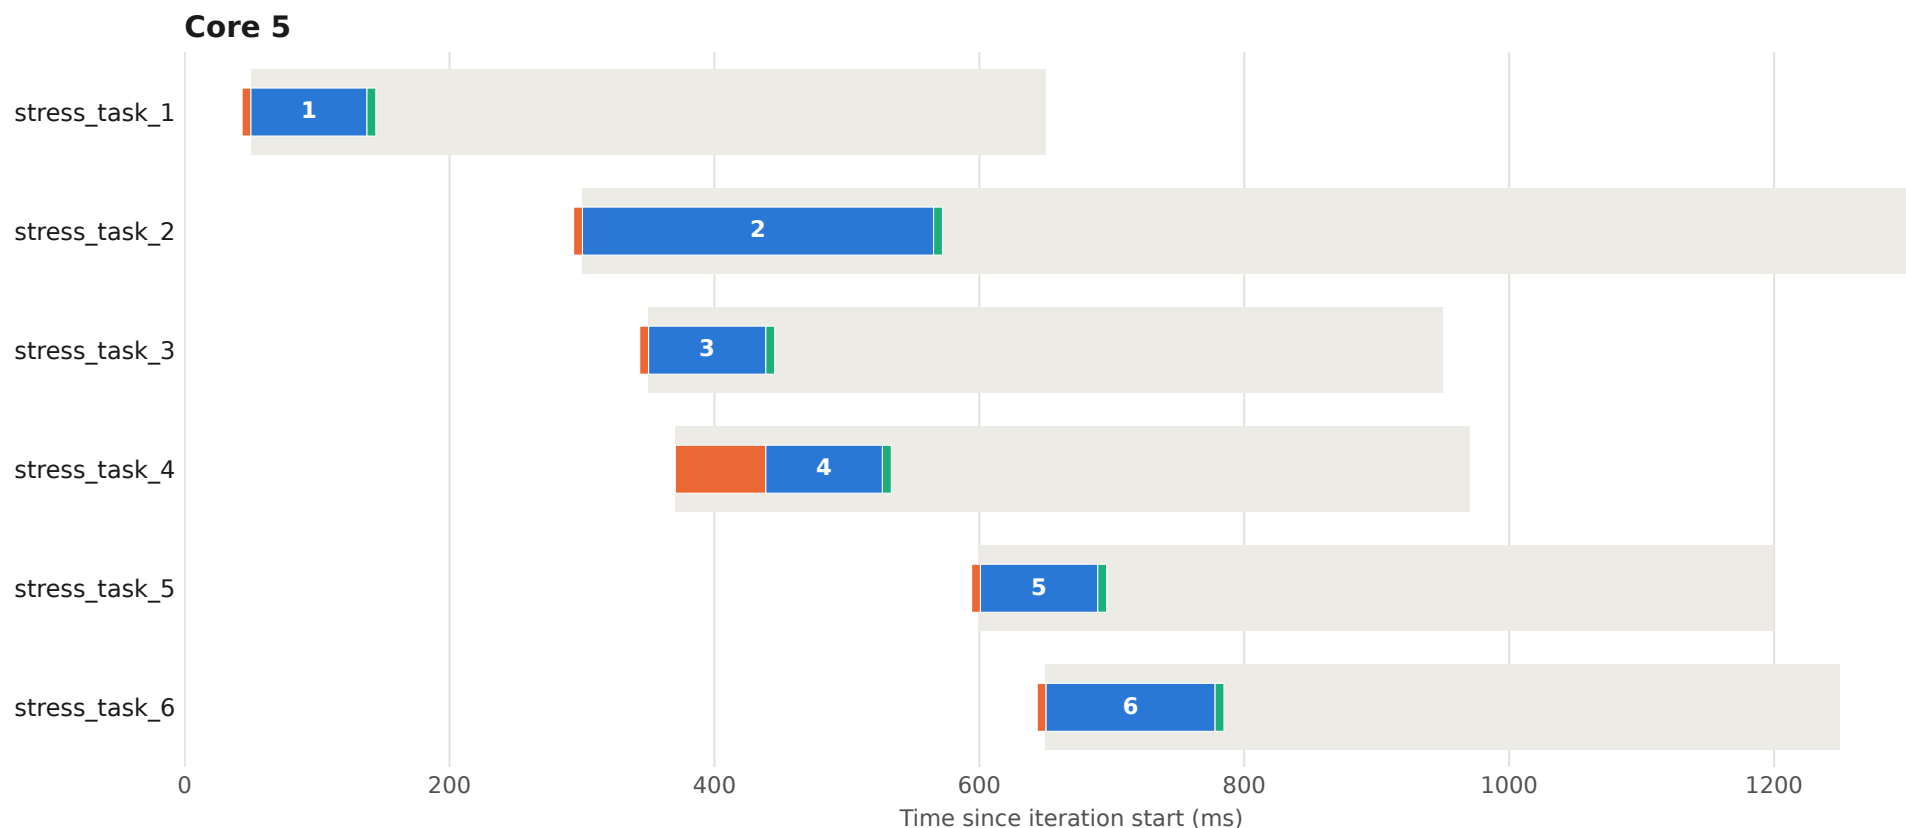


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 63 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

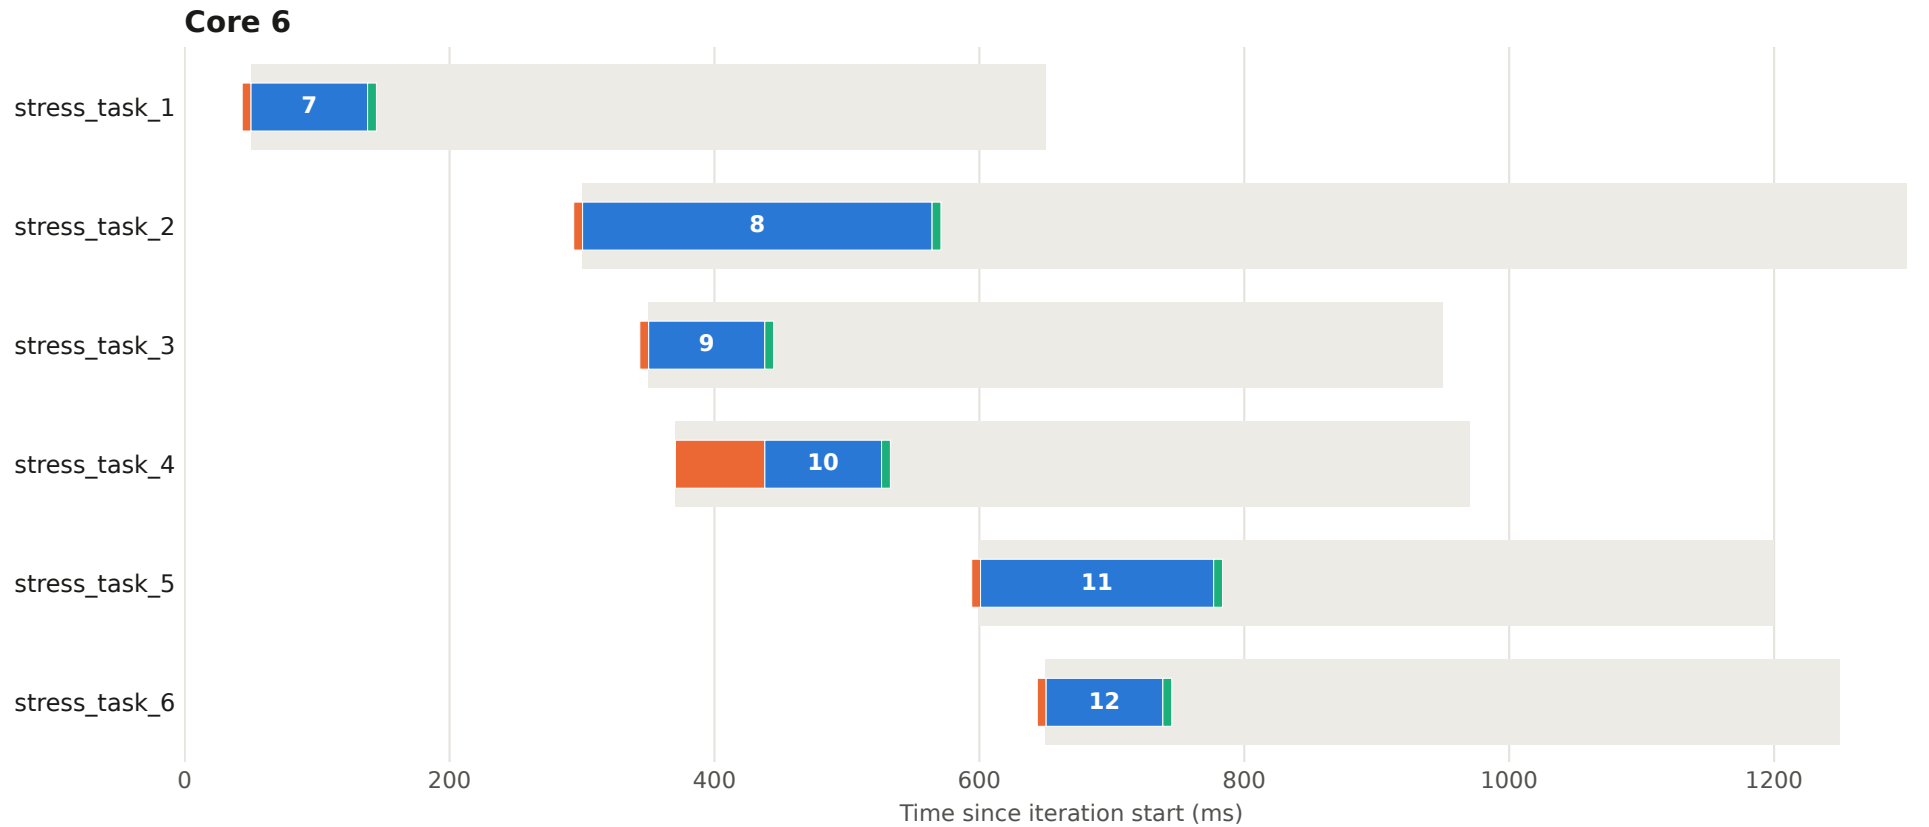


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 64 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

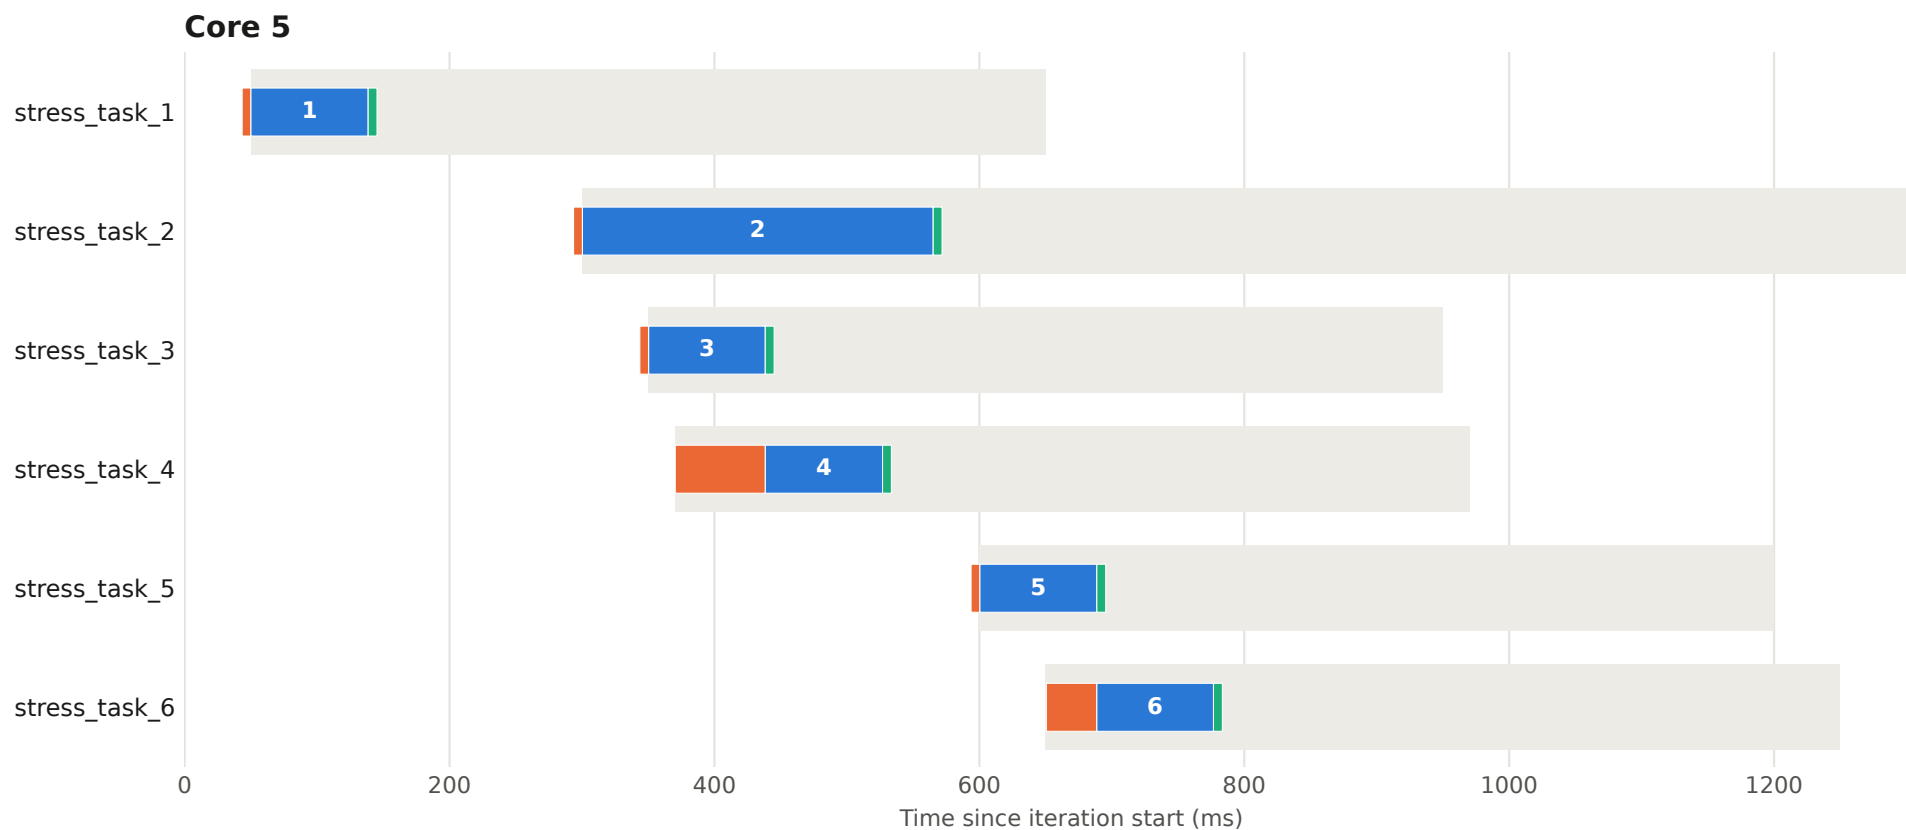


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 64 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

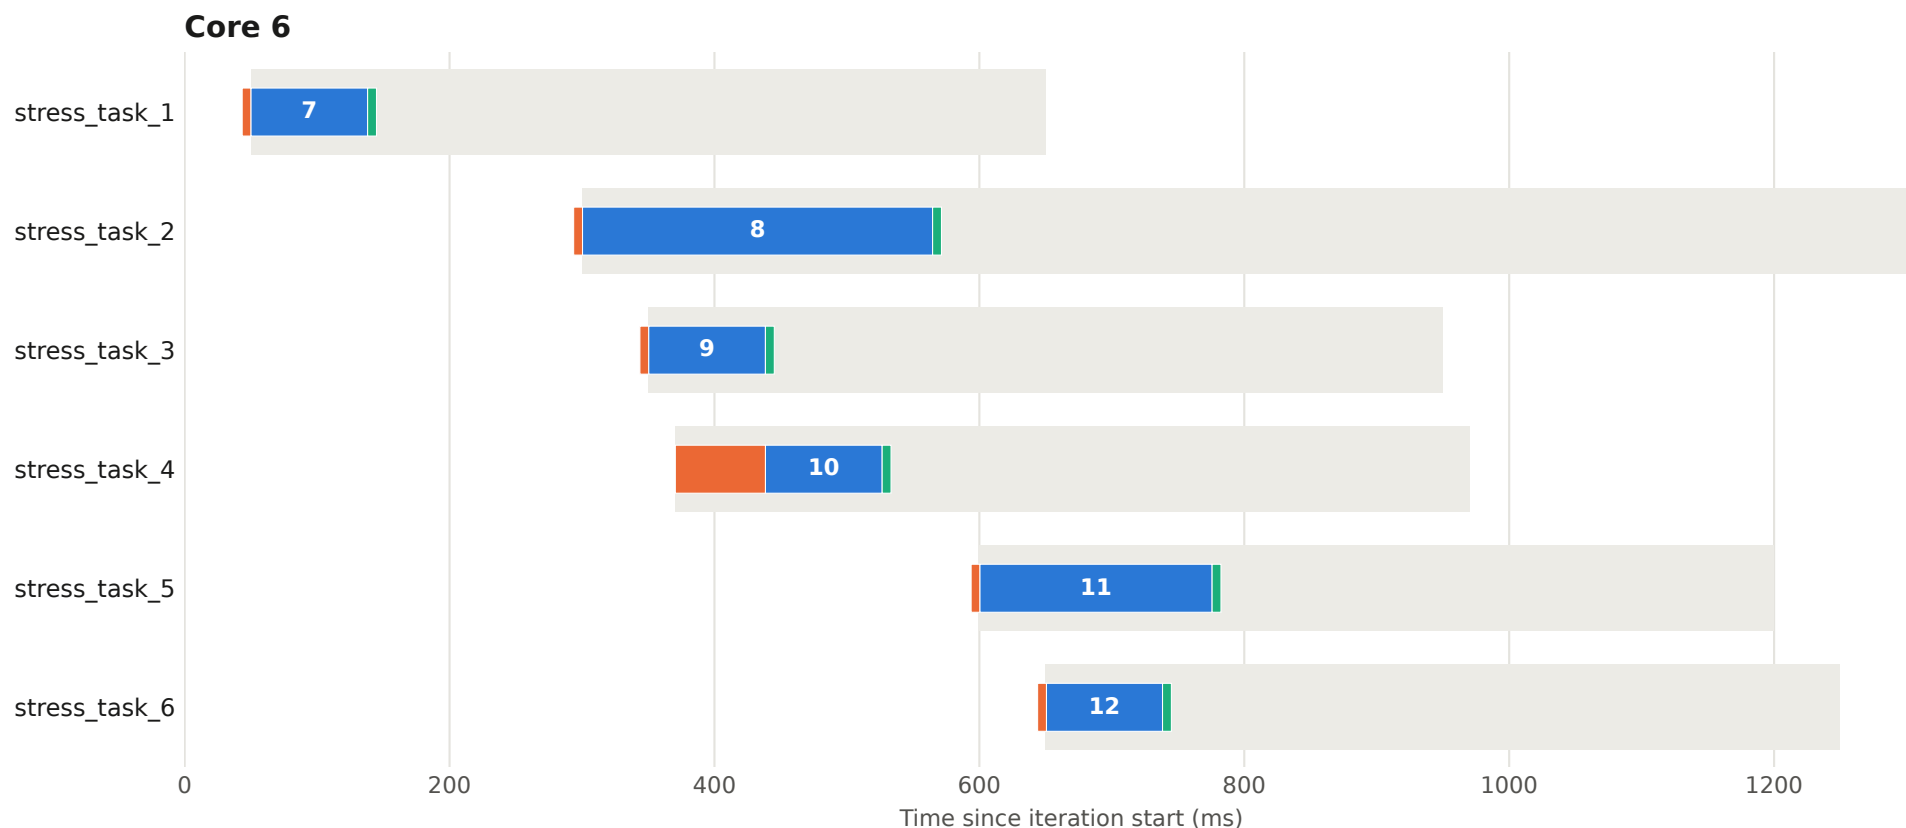


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 65 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

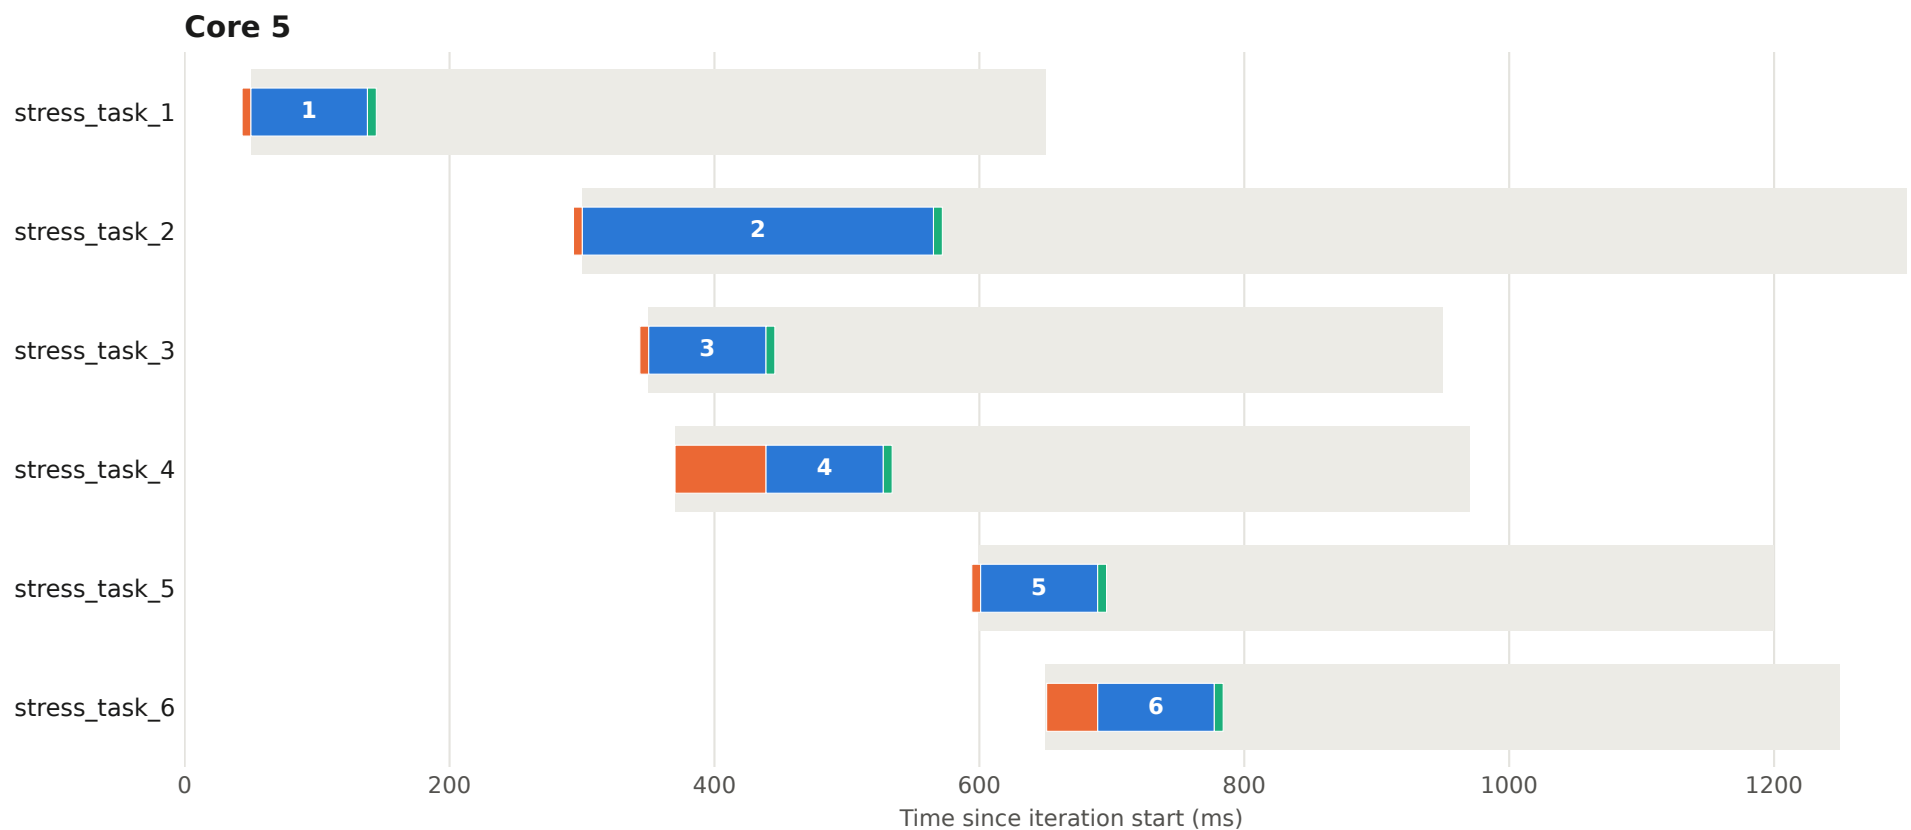


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 65 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

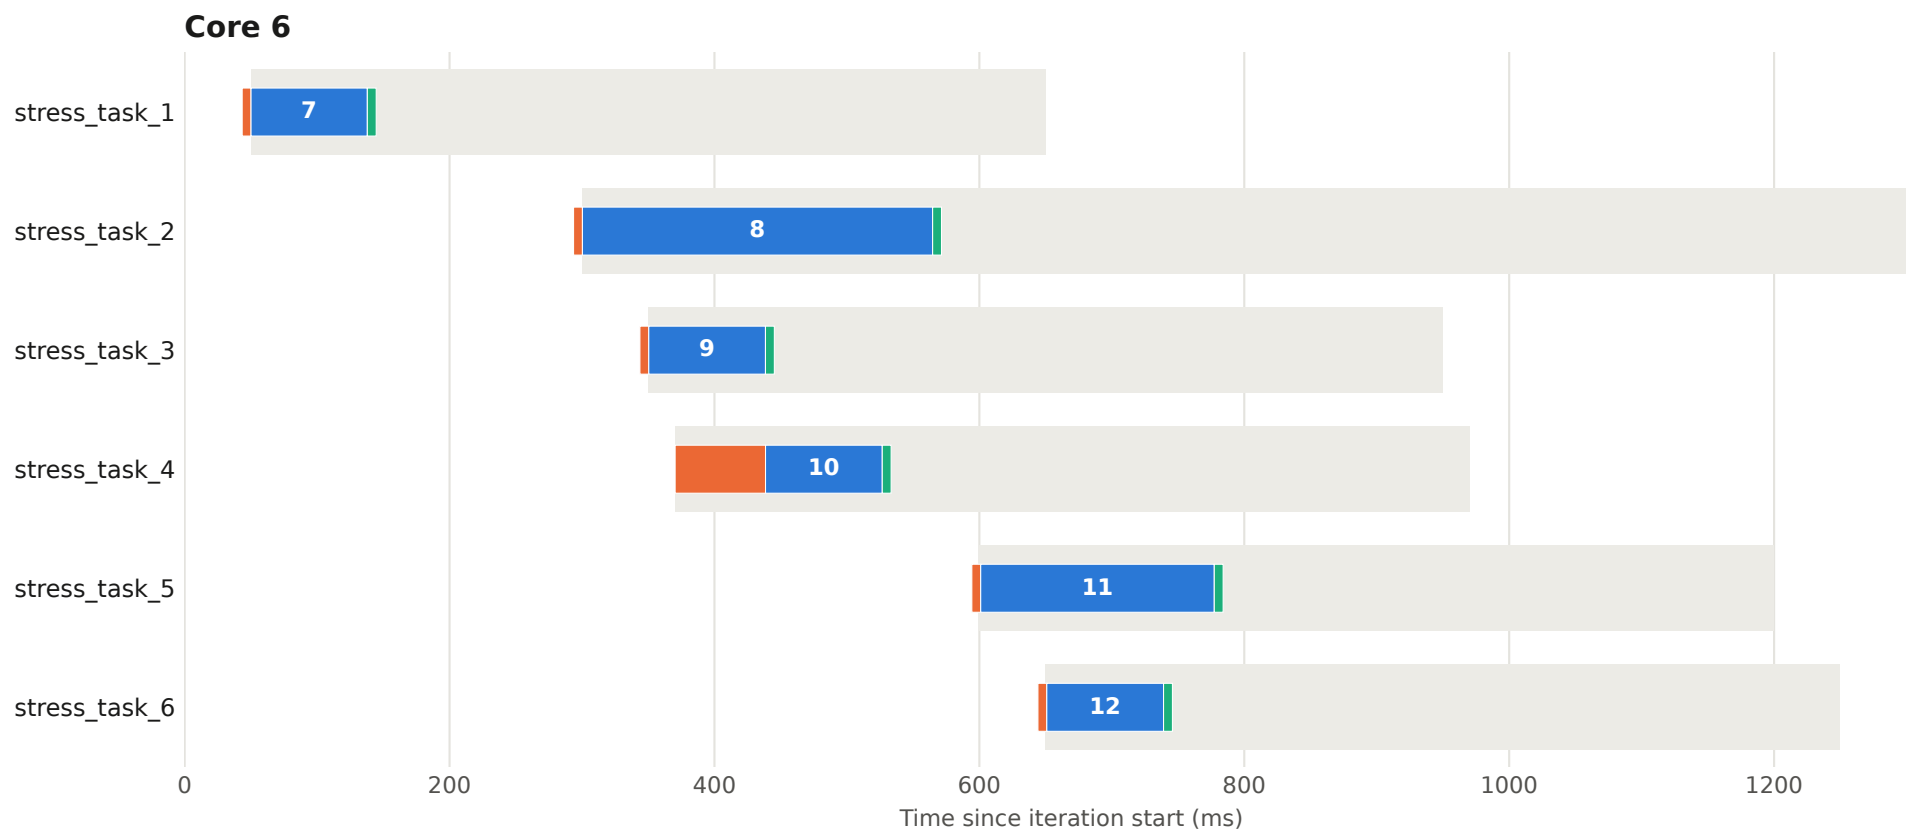


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 66 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

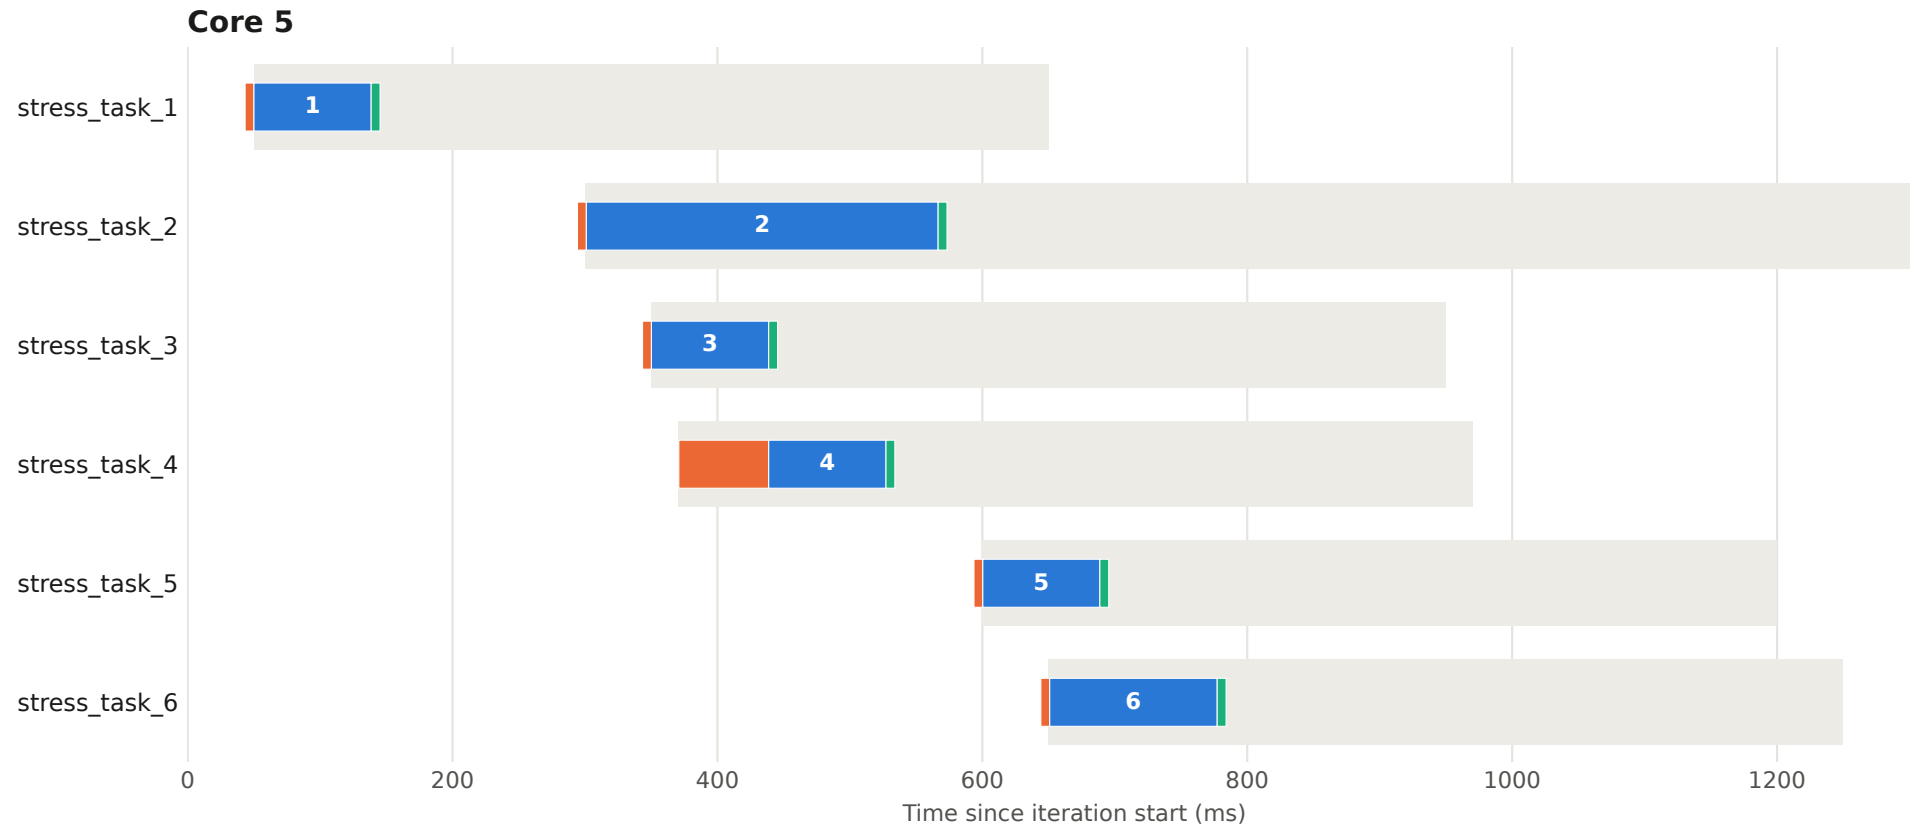


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 66 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

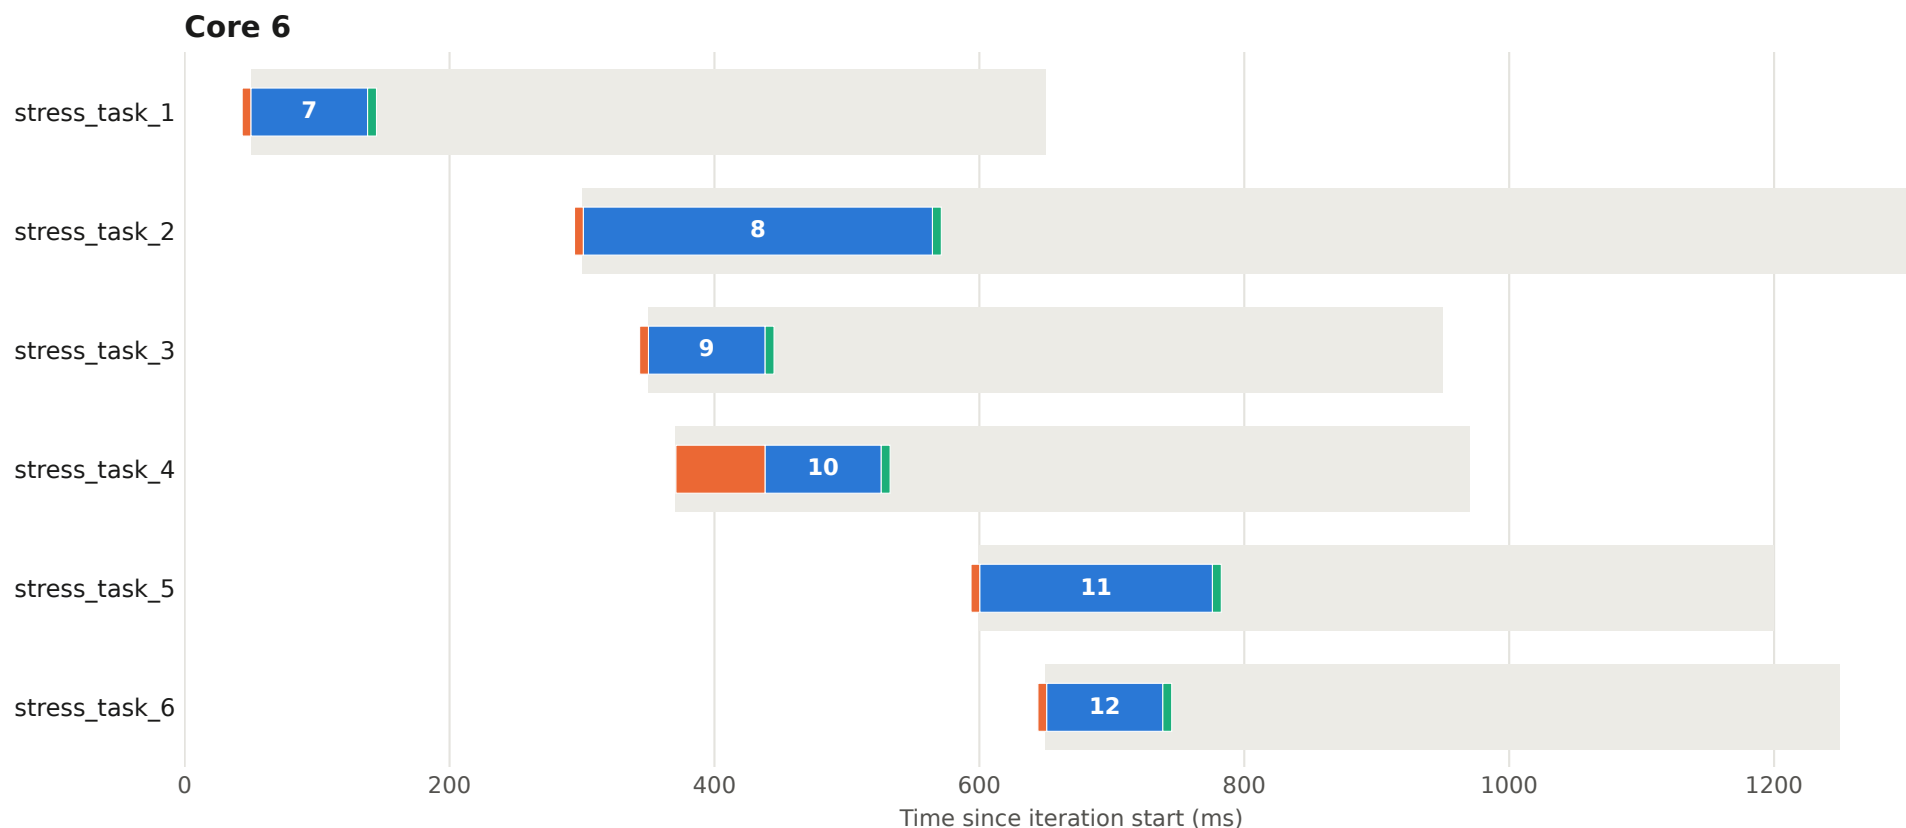


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 67 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

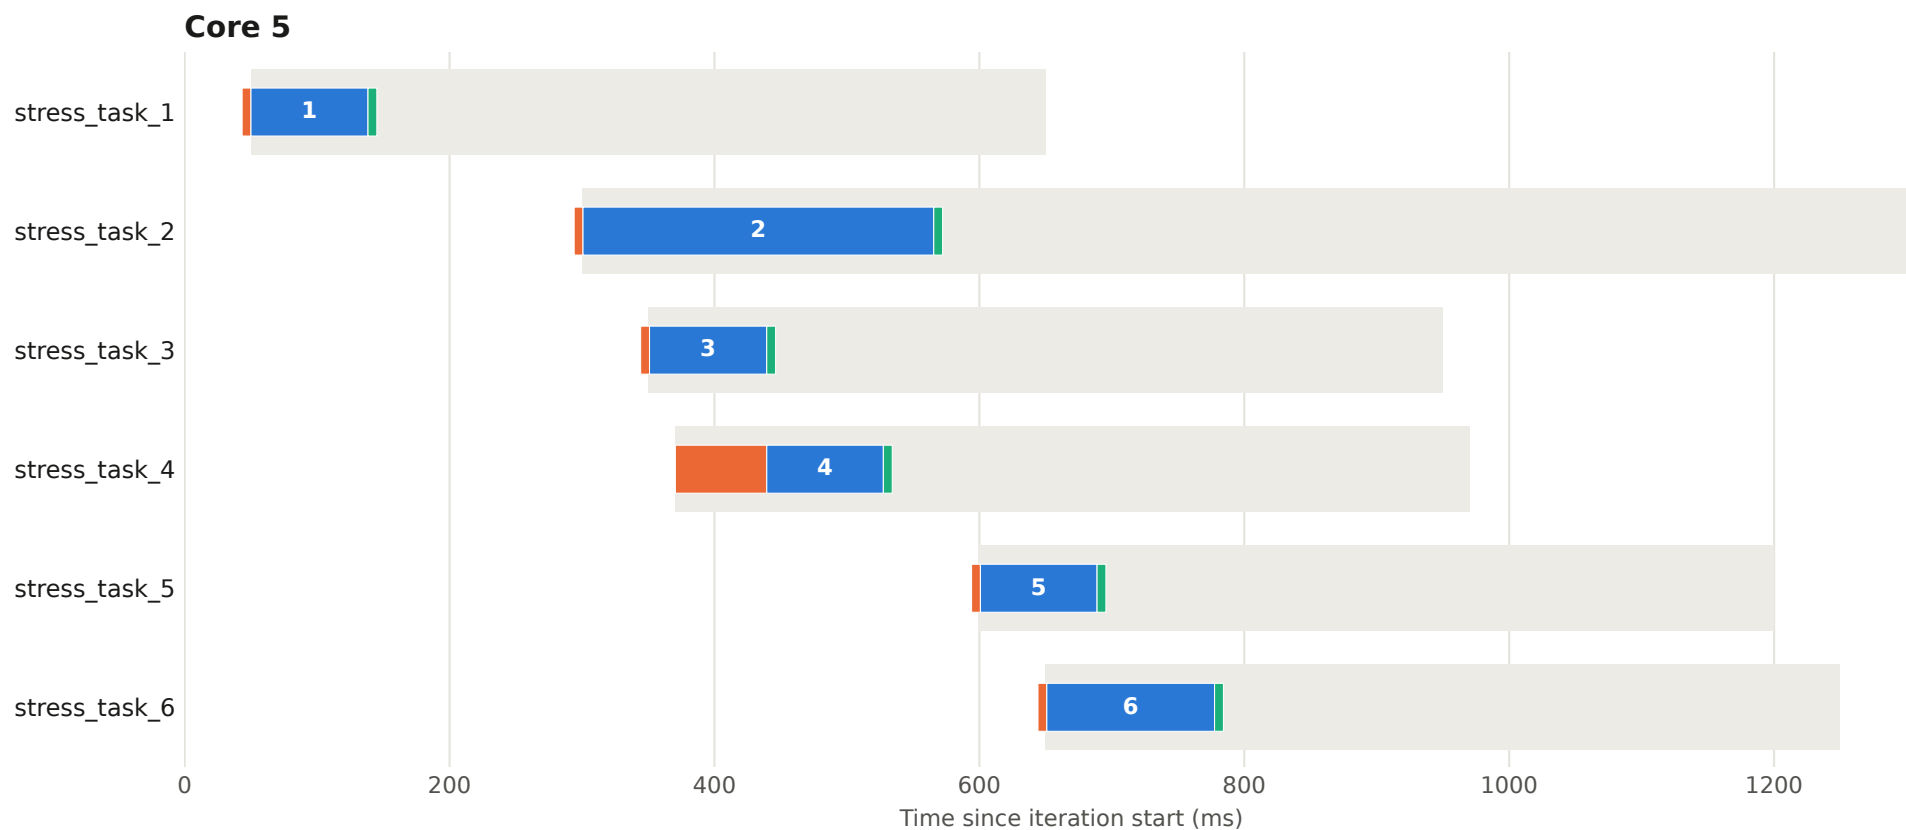


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 67 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

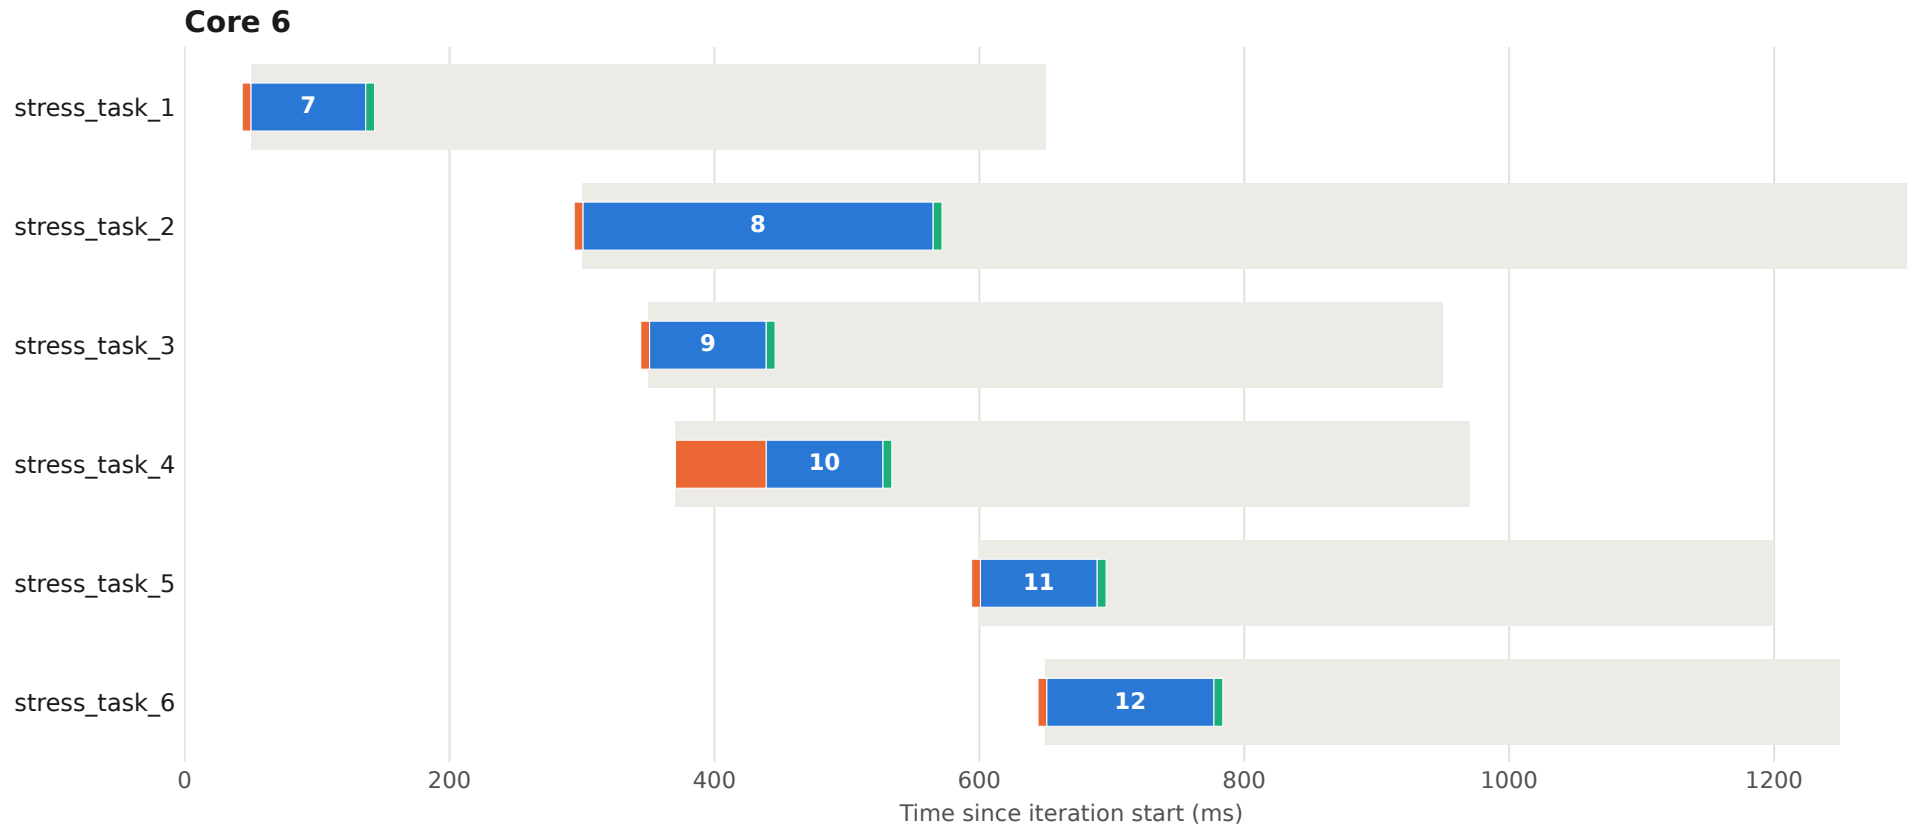


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 68 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

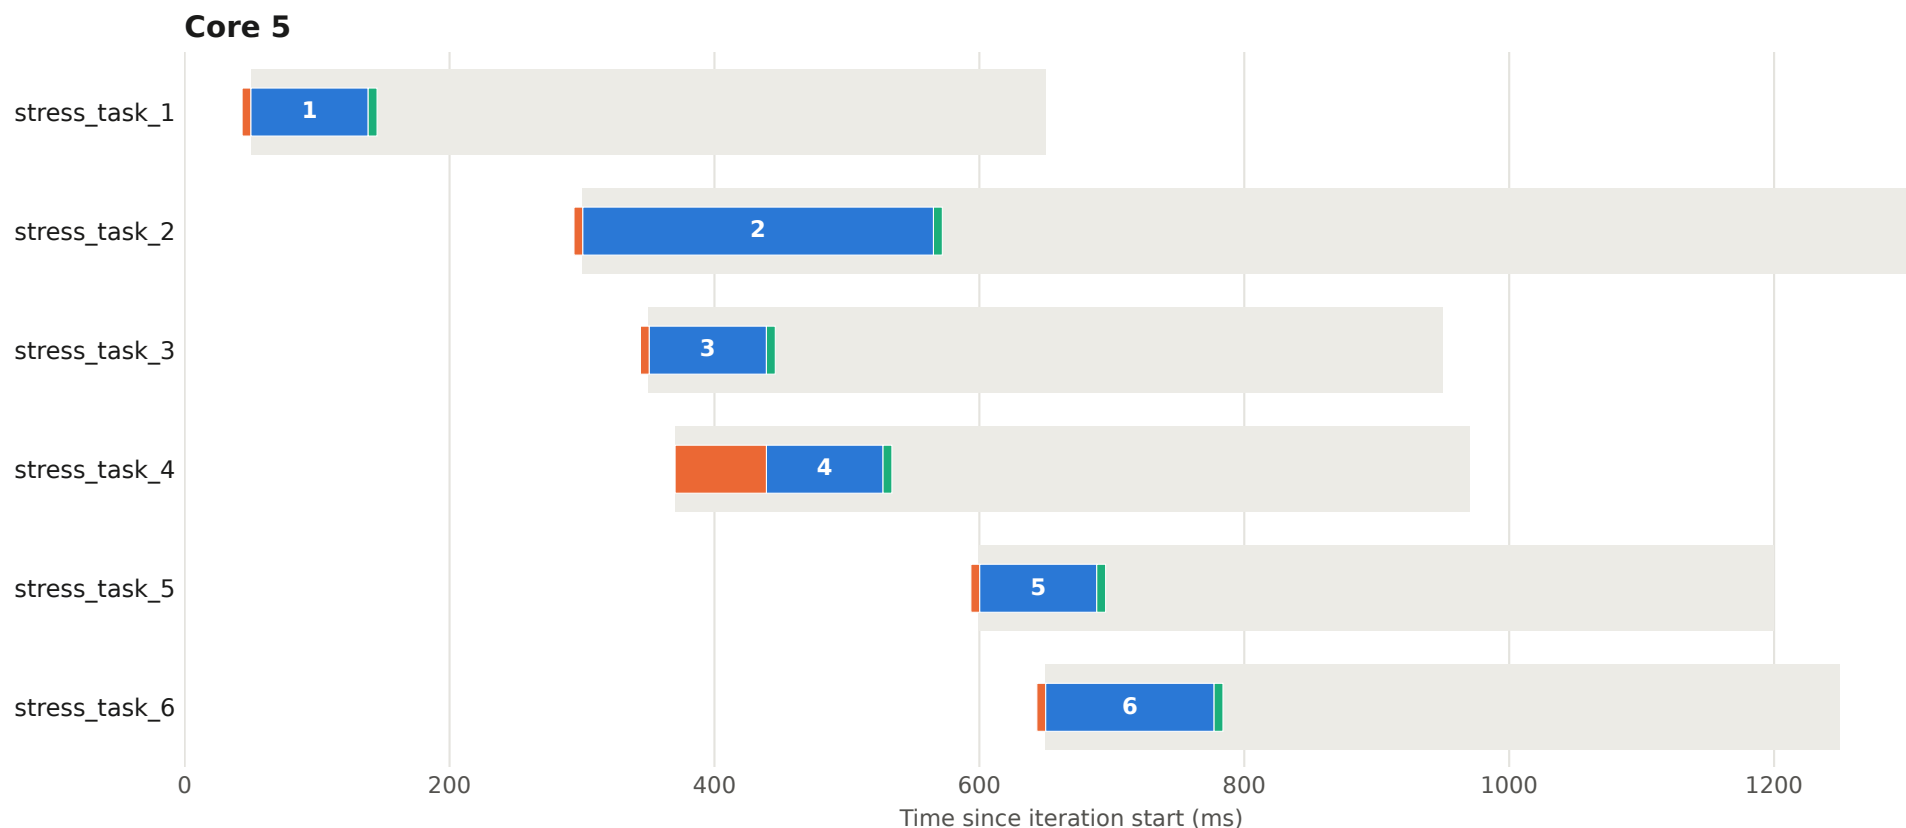


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 68 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

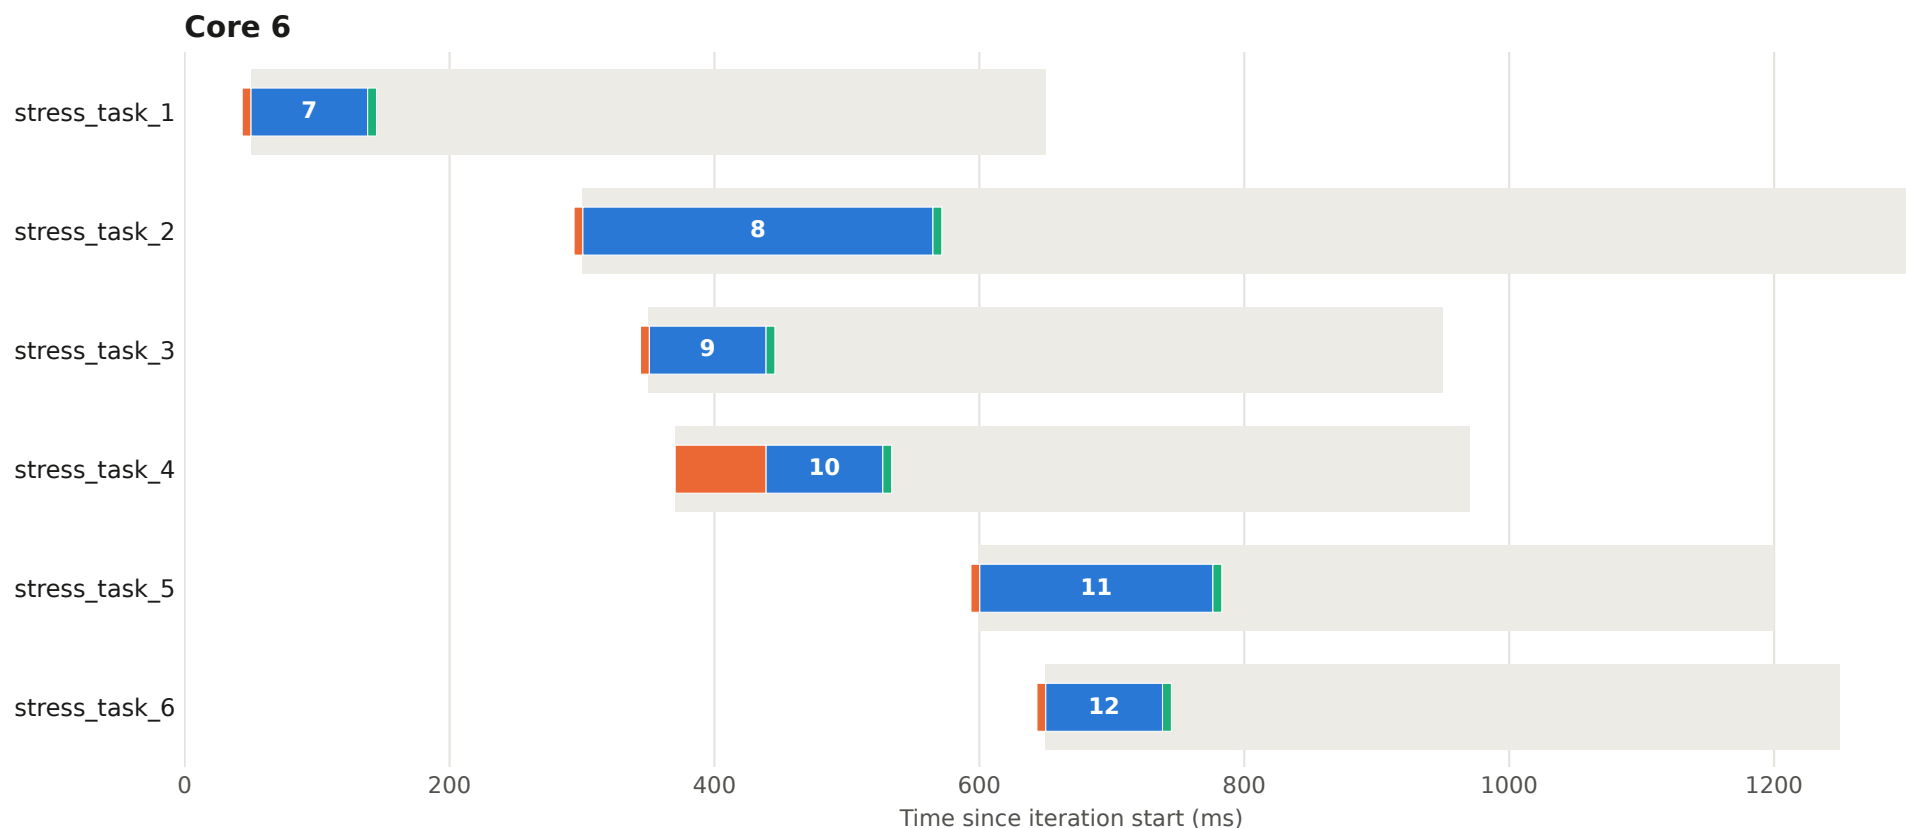


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 69 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

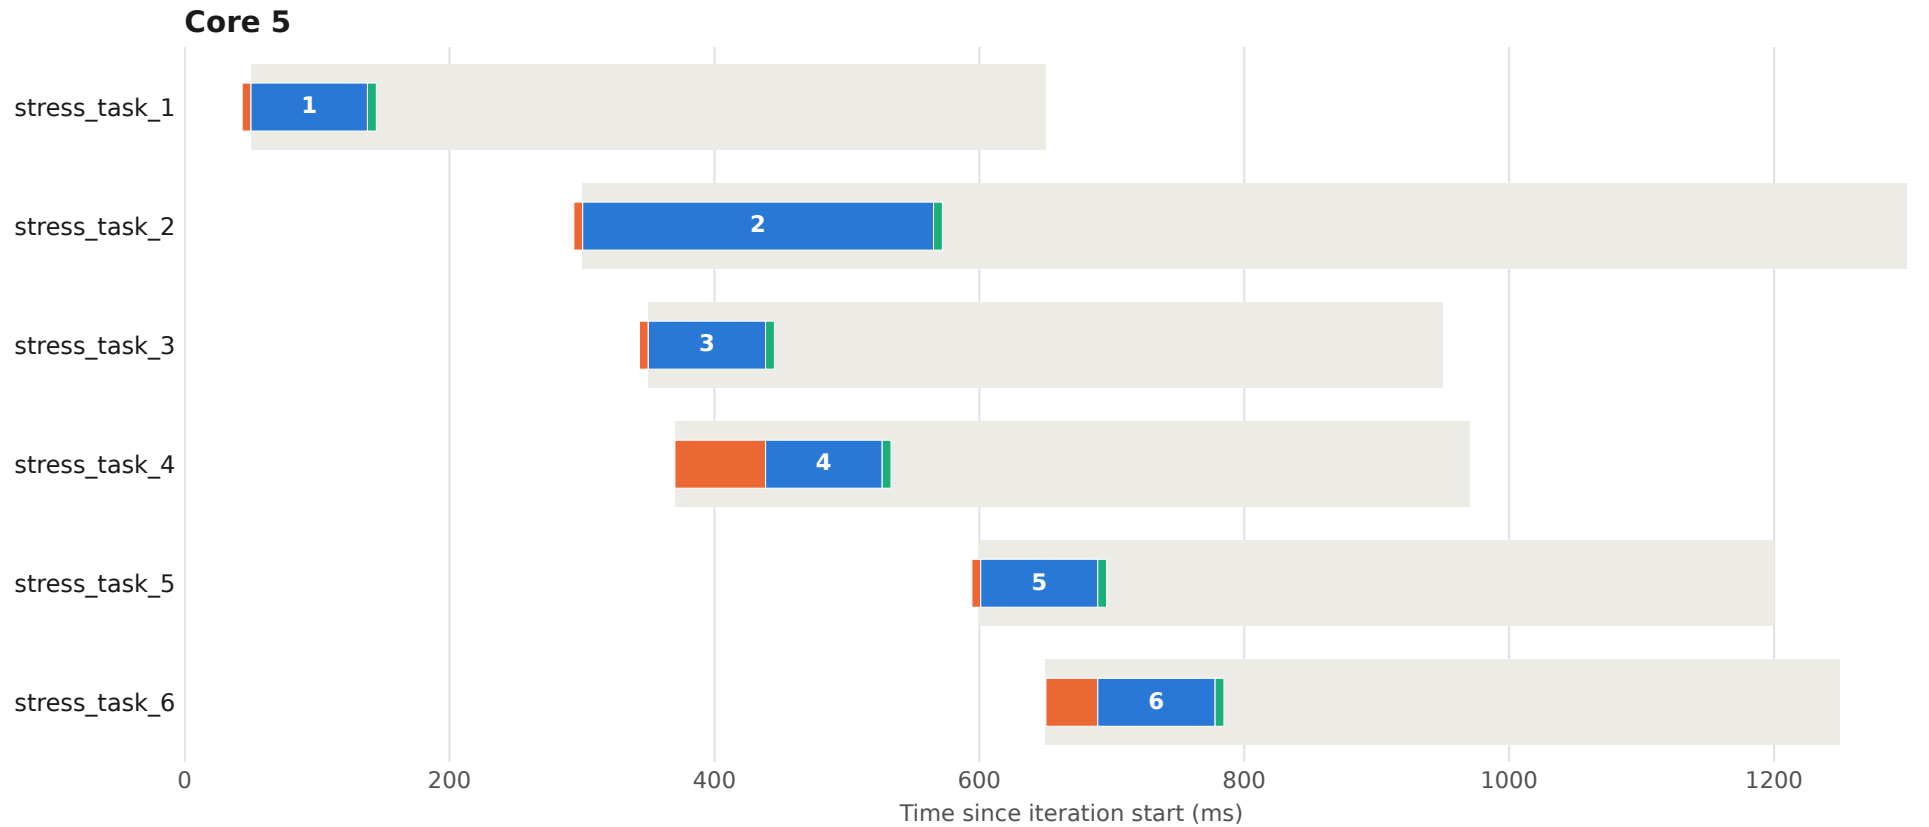


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 69 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

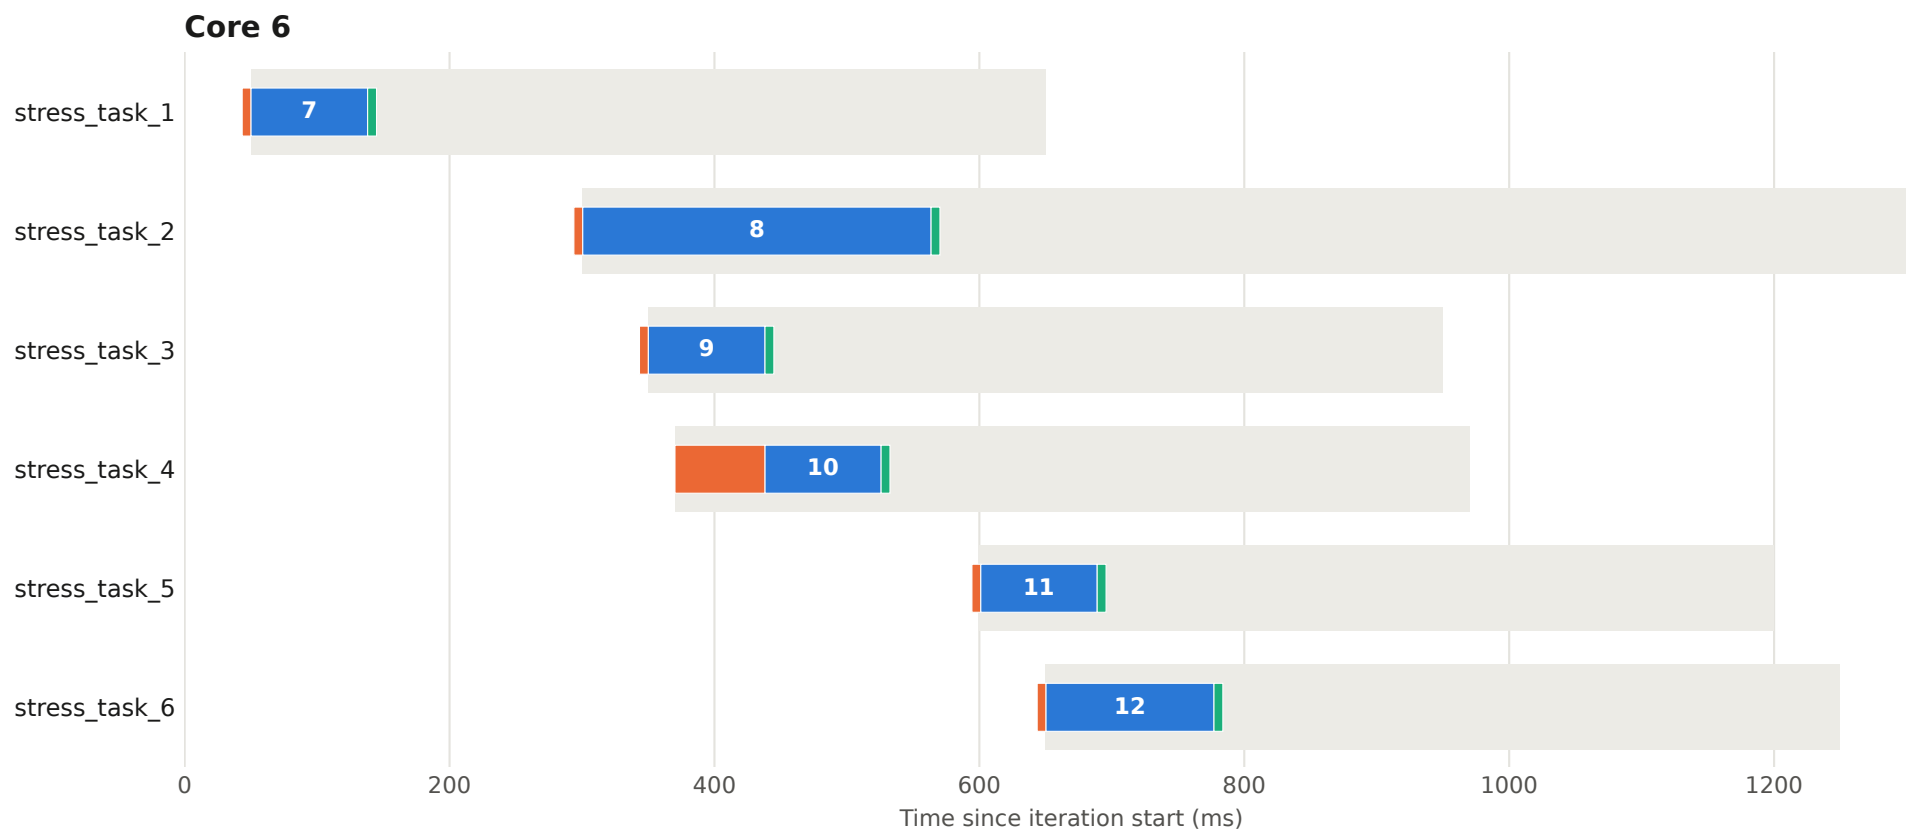


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 70 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

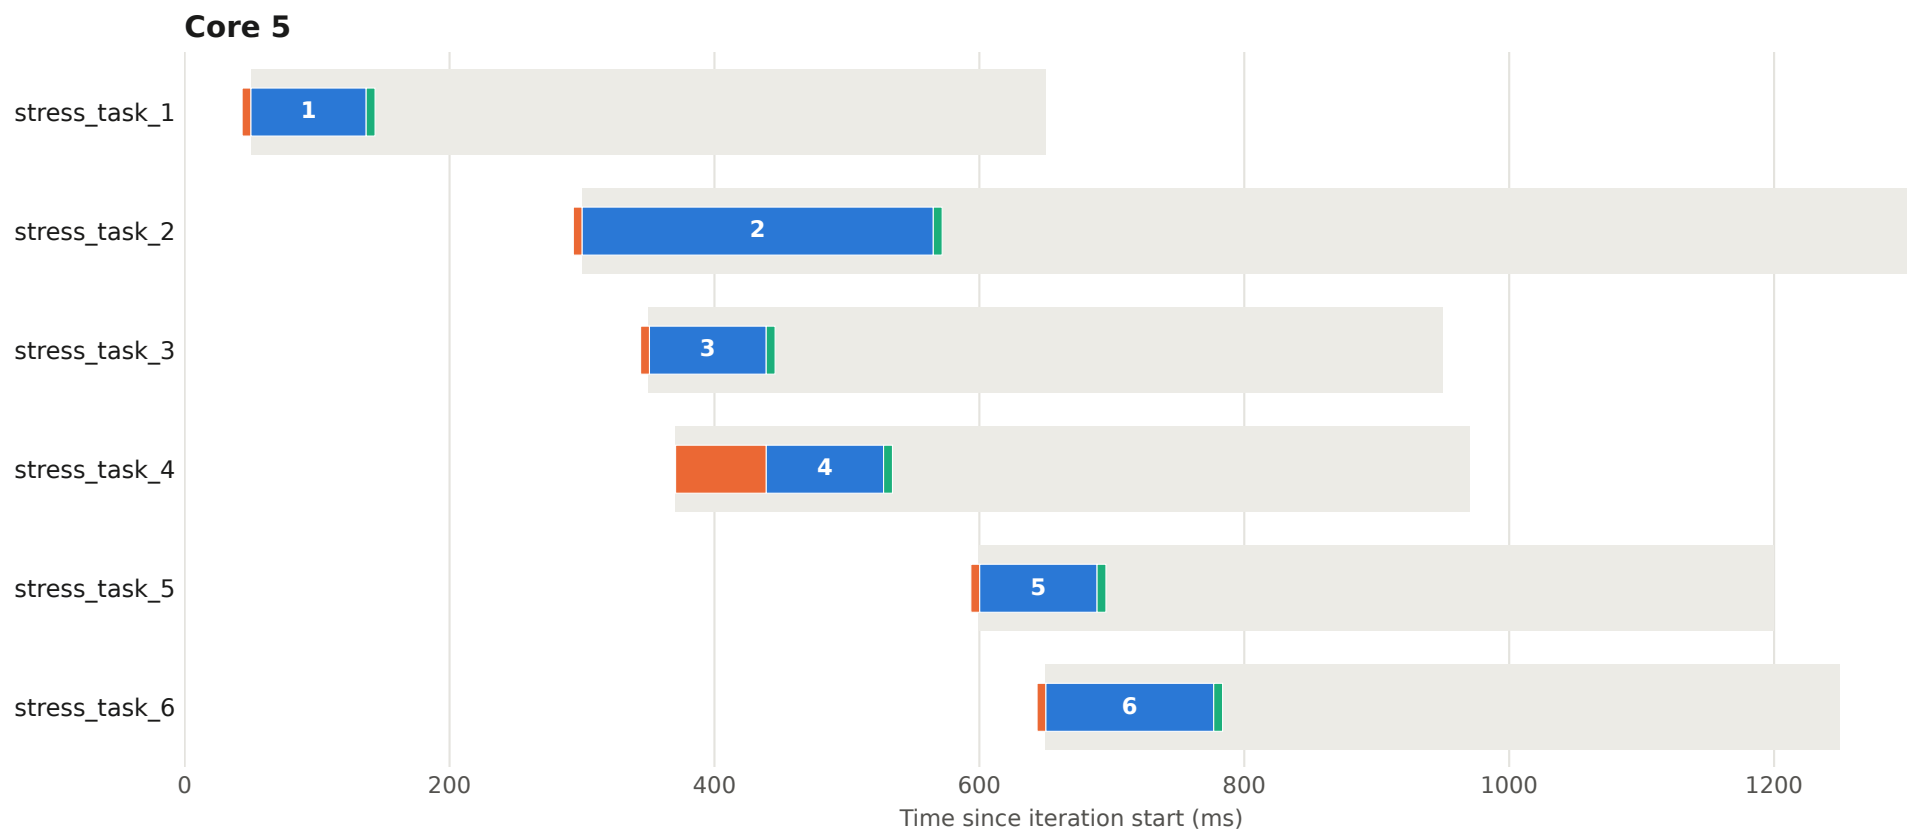


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 70 - core 6

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

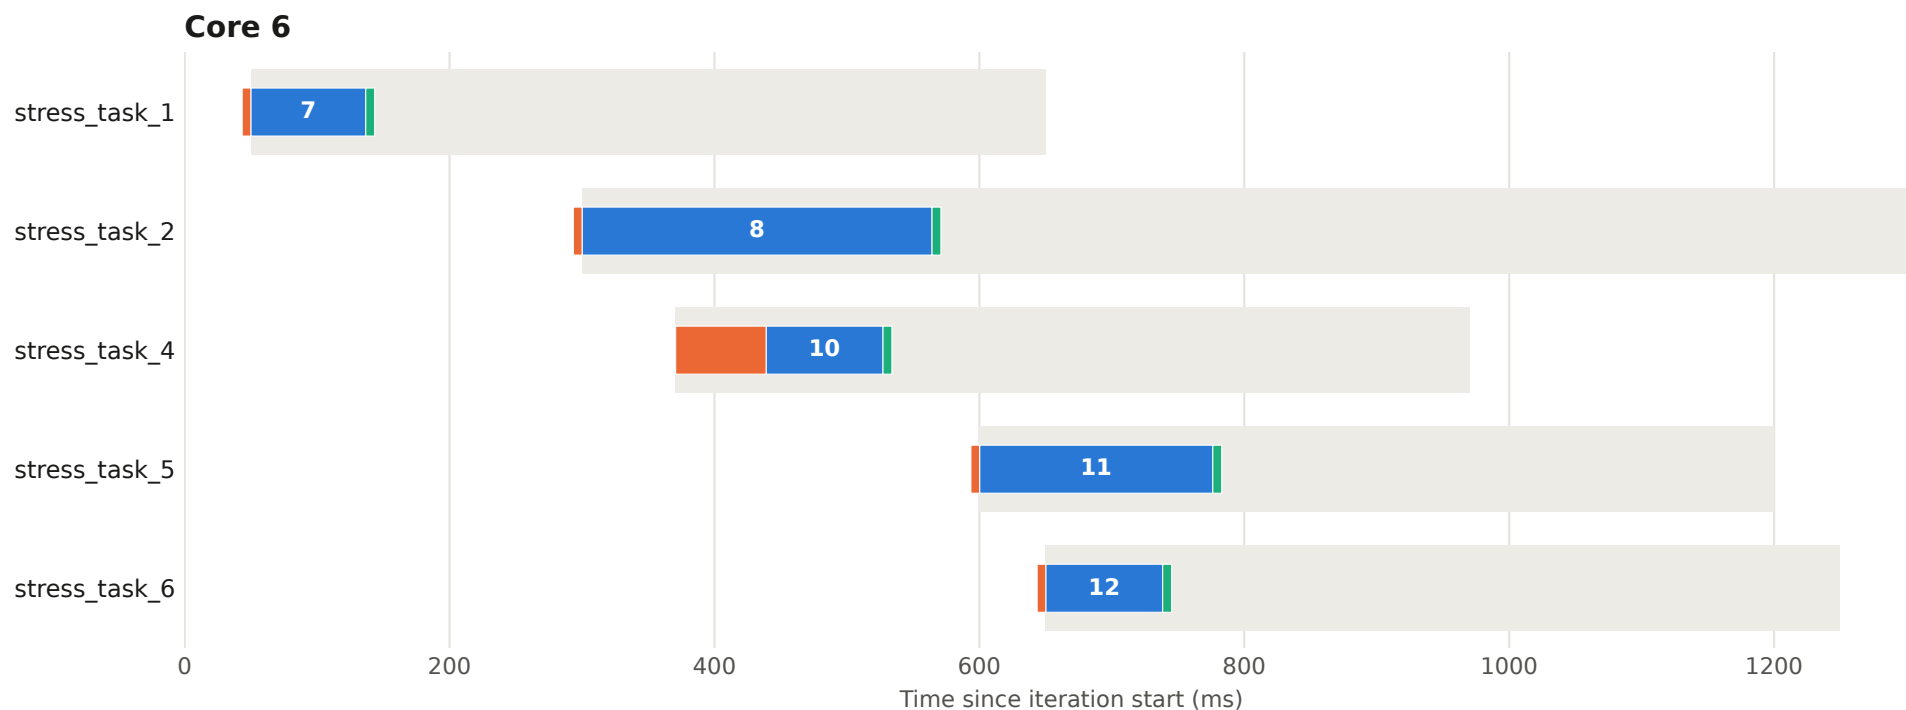

Execution plan - iteration 70 - core 62026

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

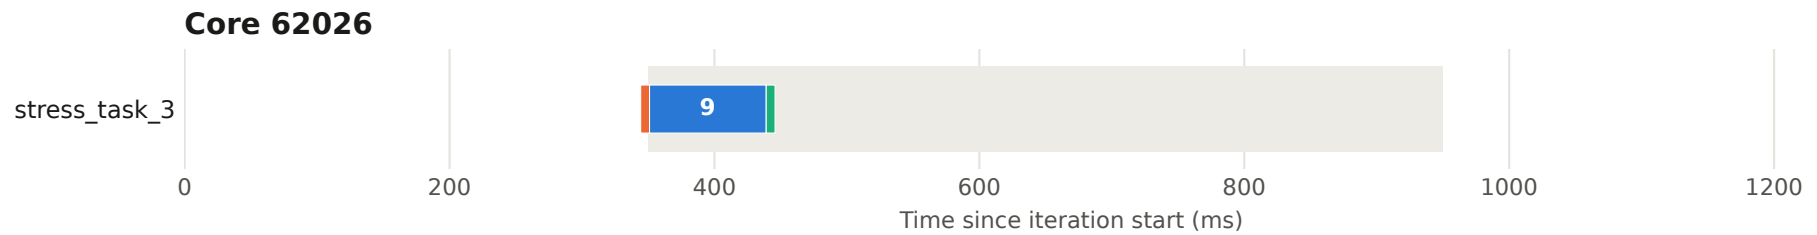

Execution plan - iteration 71 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

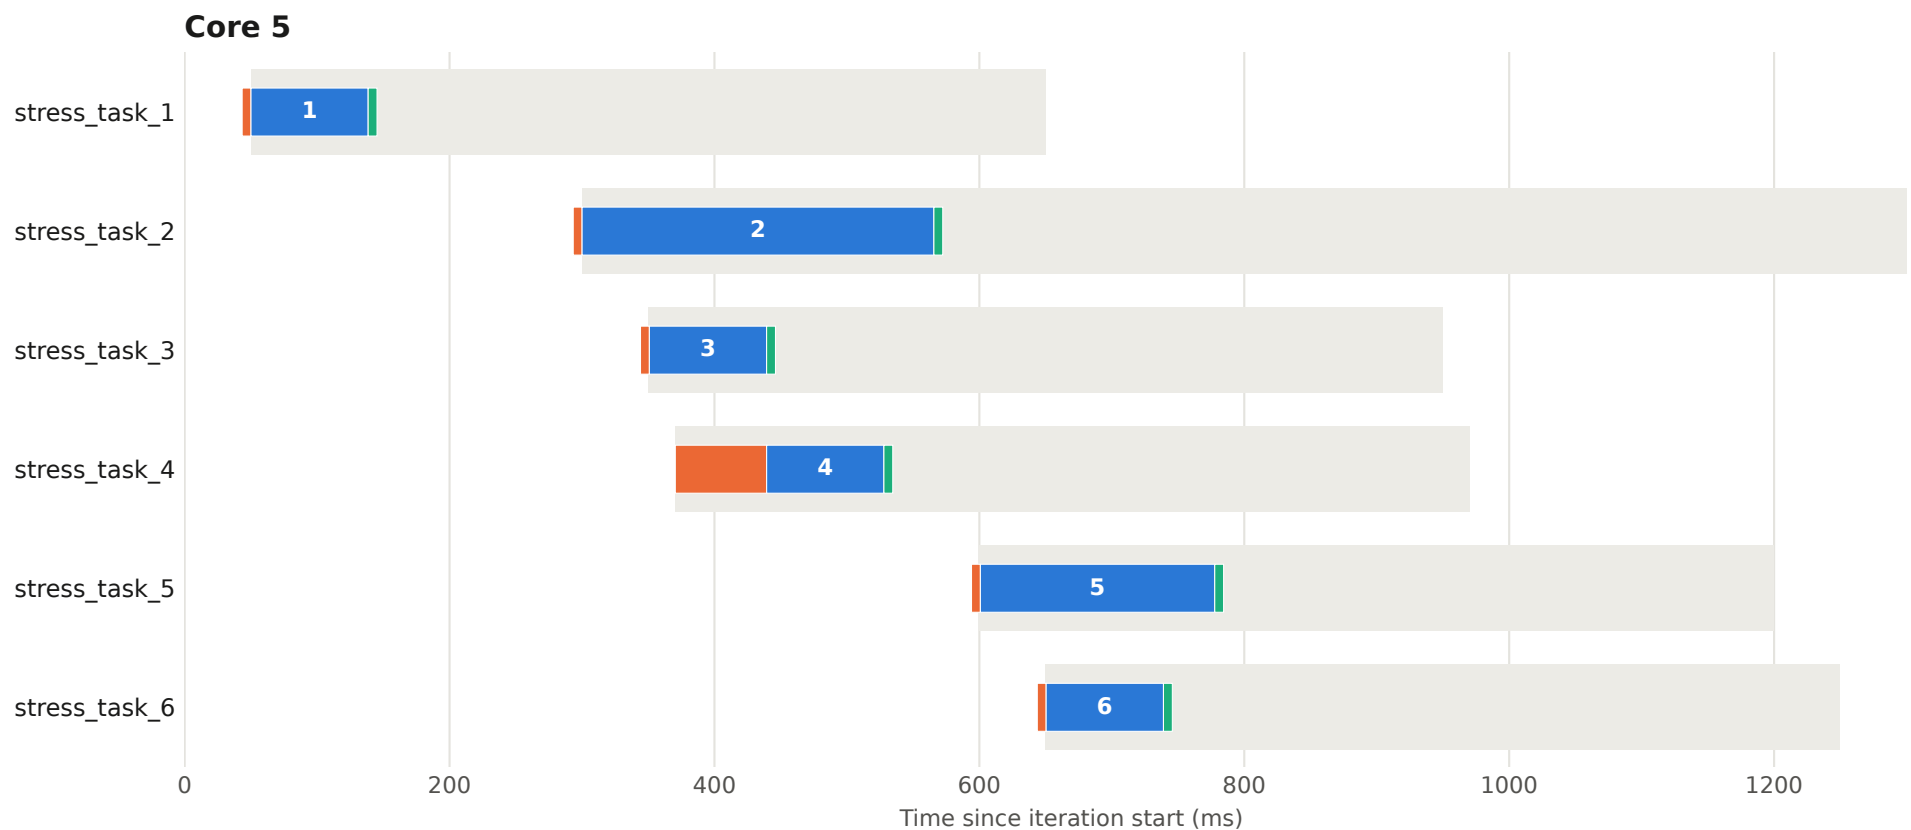


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 71 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

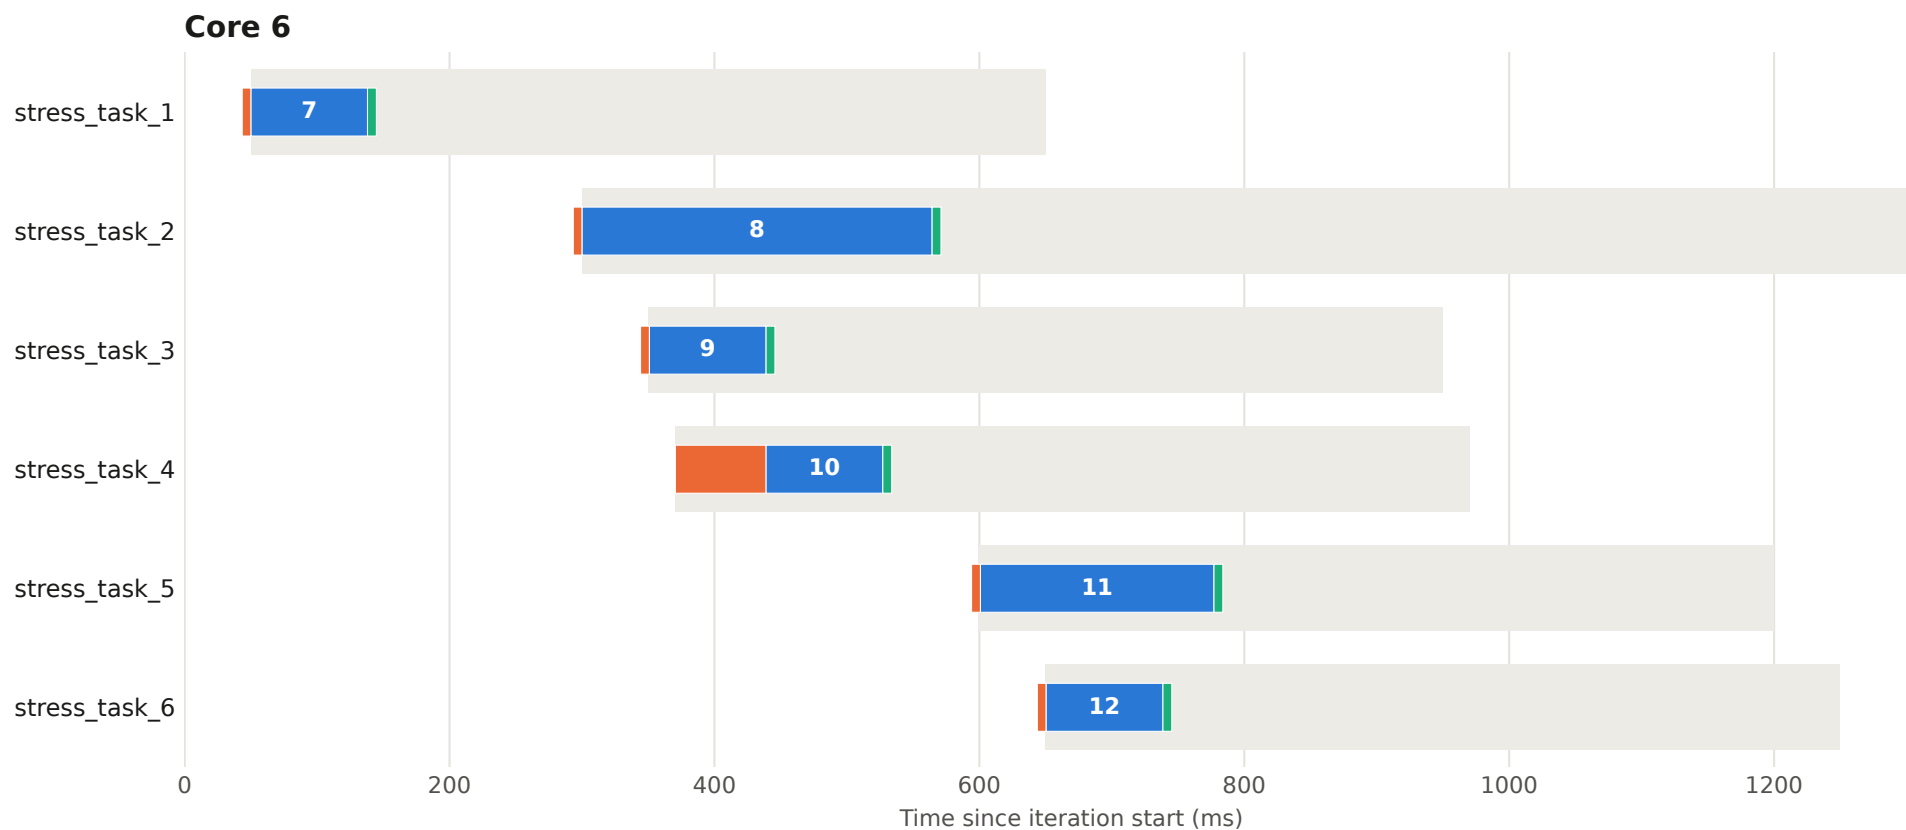


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 72 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

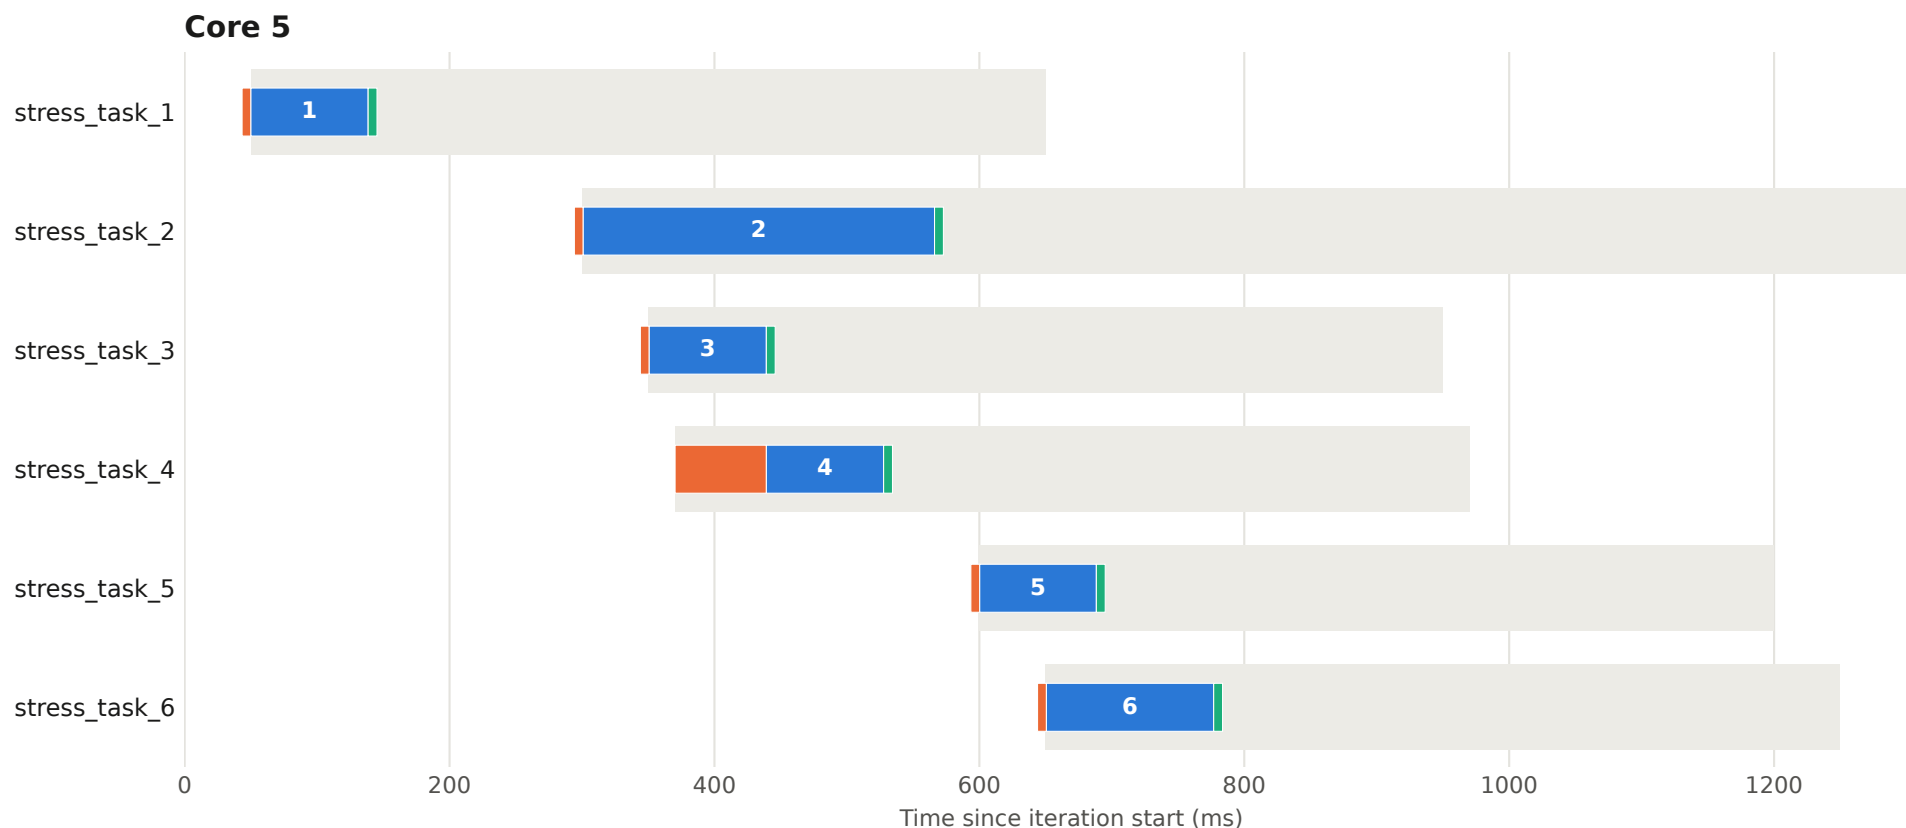


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 72 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

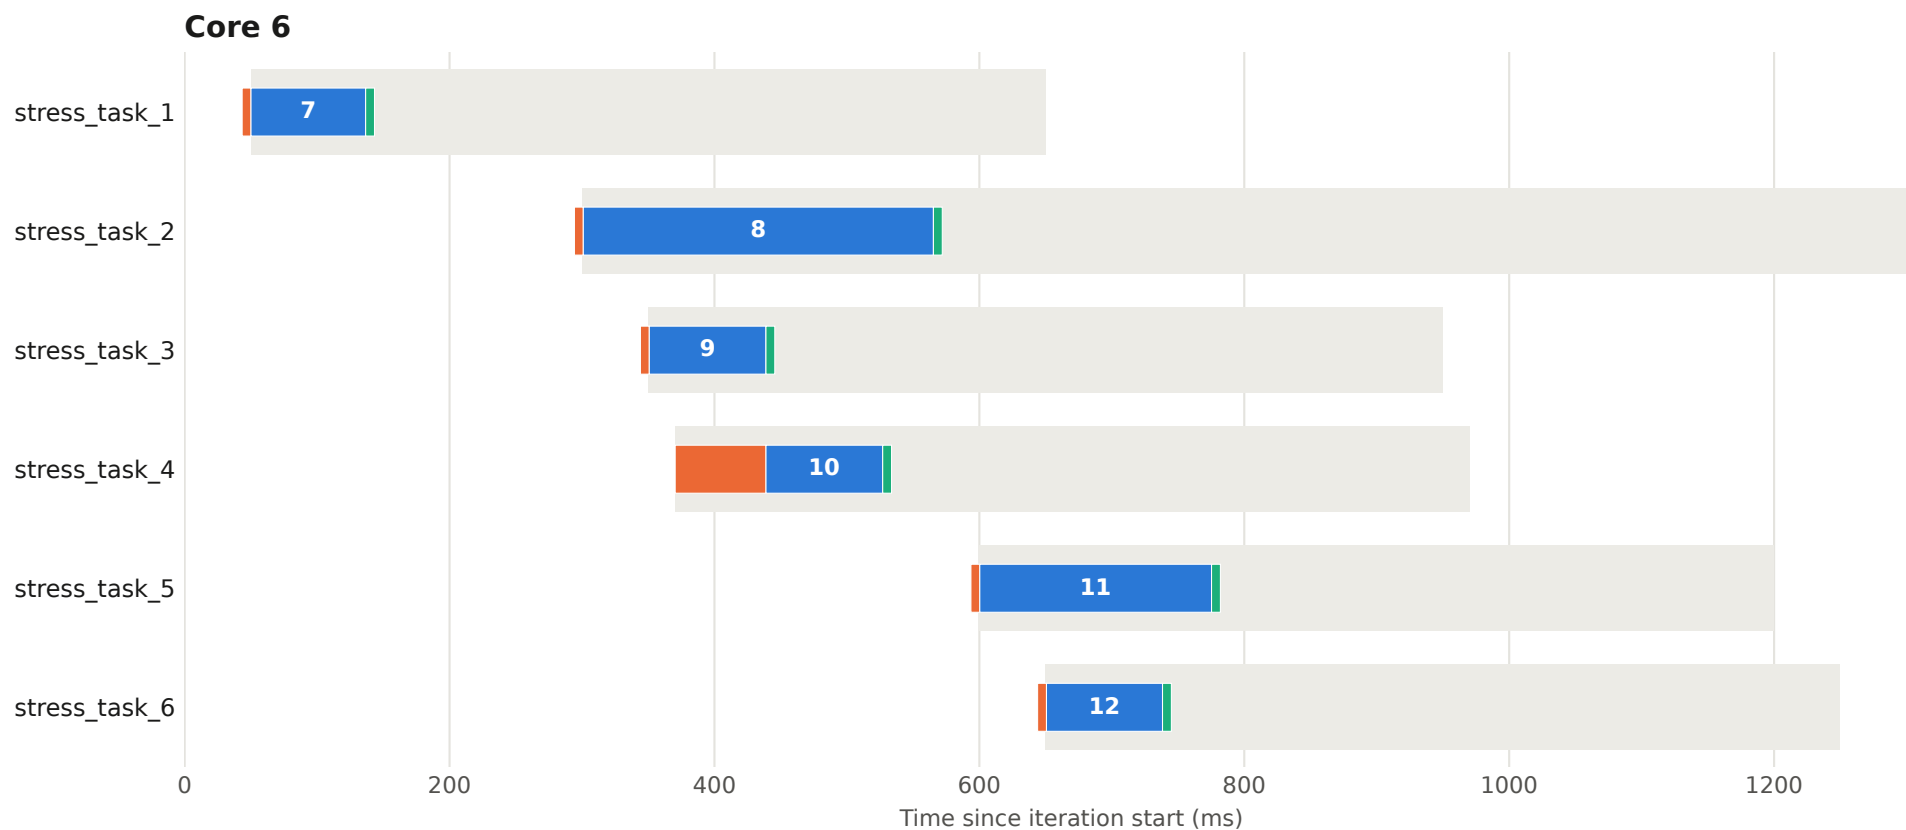


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 73 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

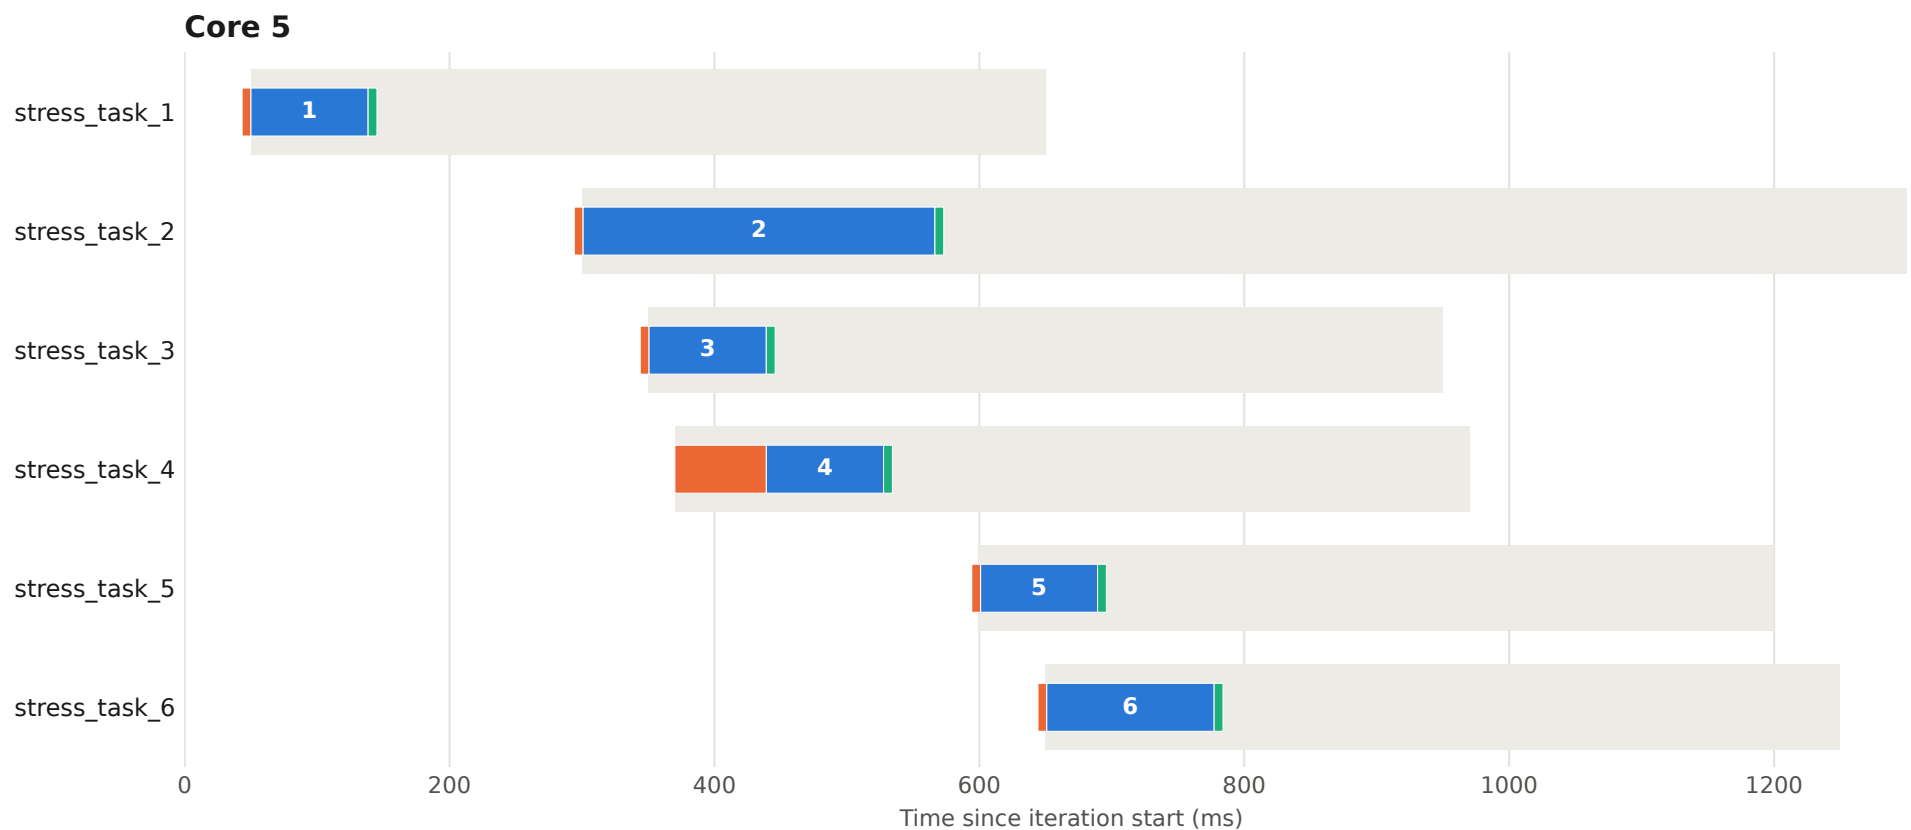


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 73 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

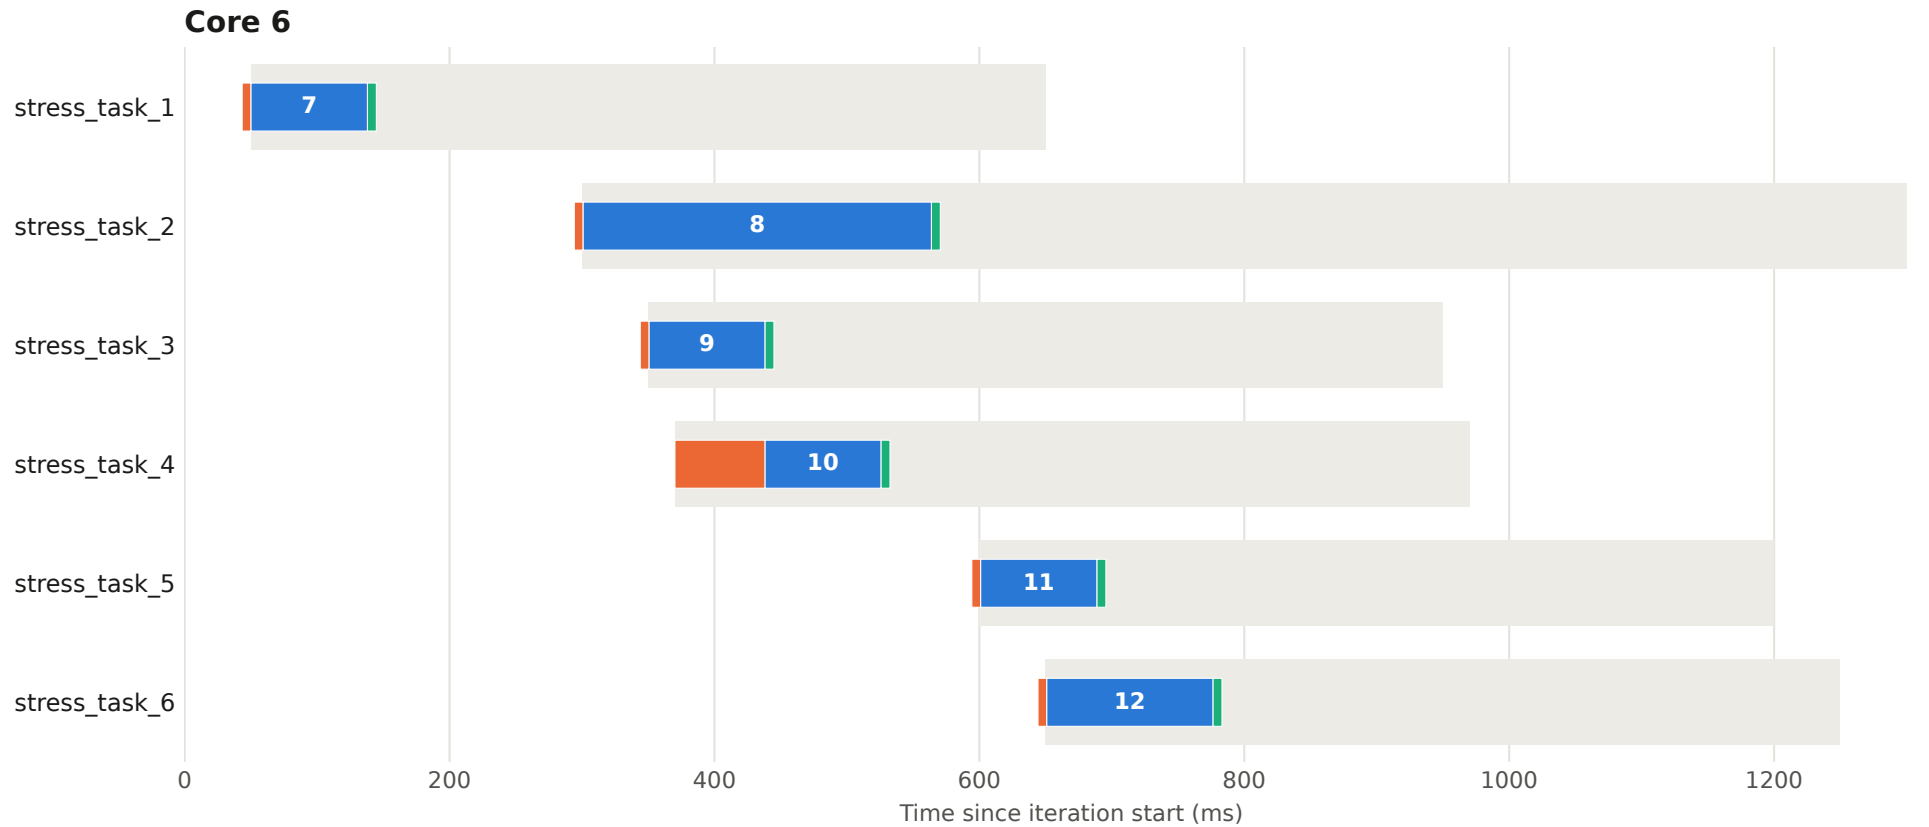


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 74 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

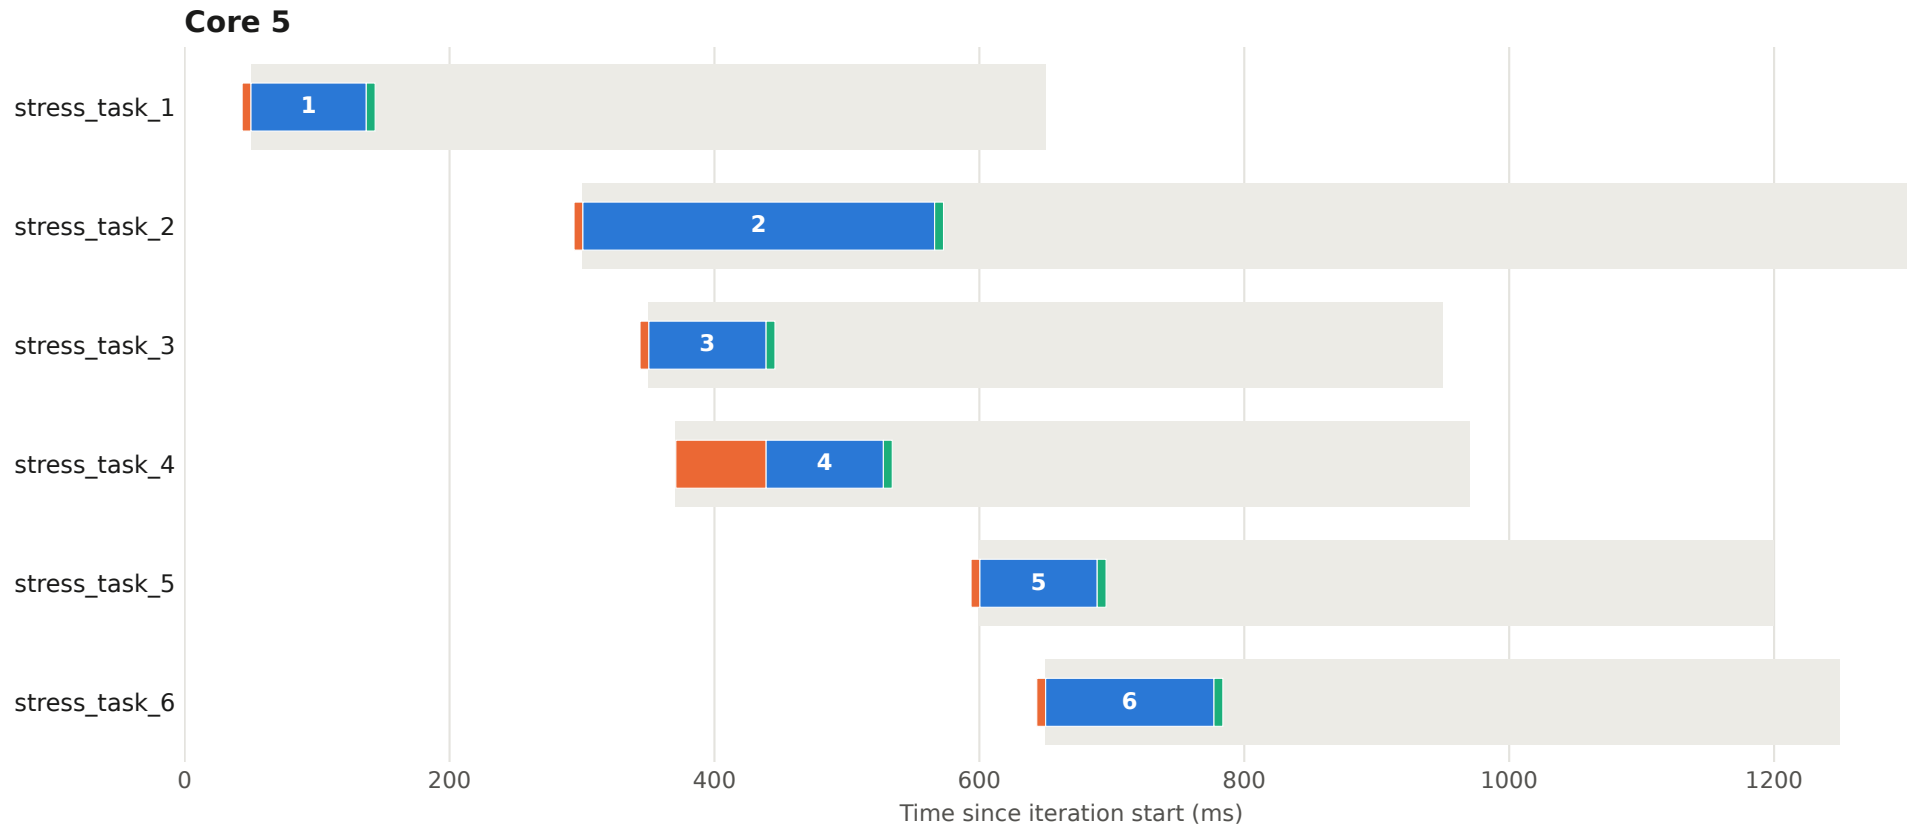


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 74 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

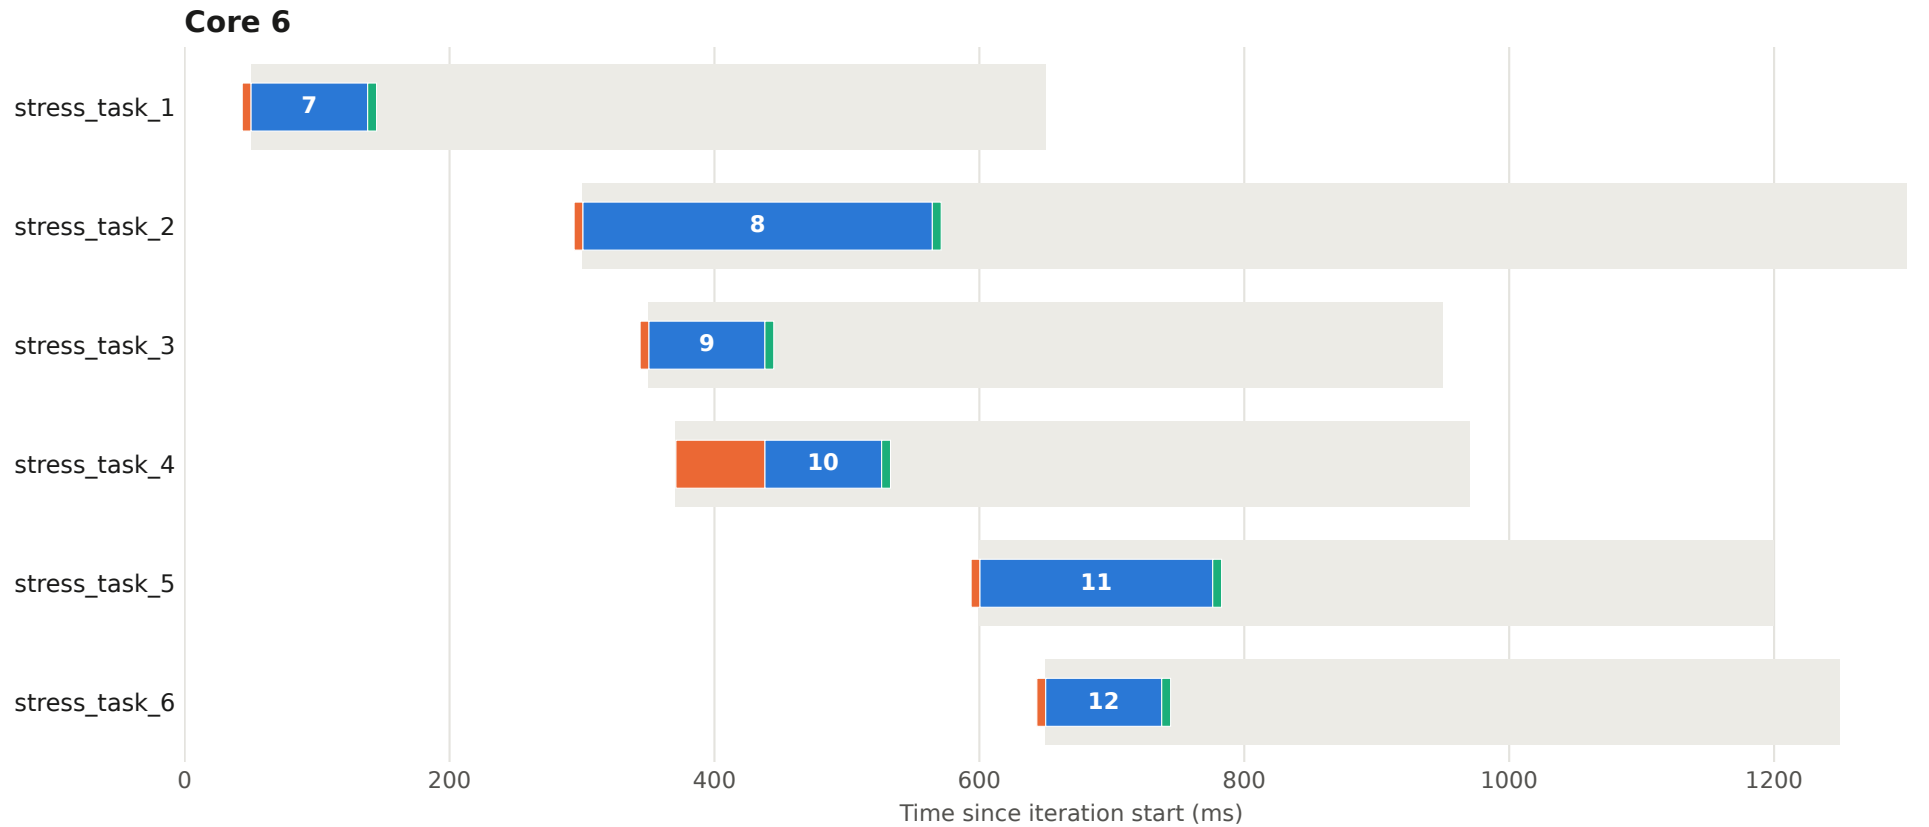


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 75 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

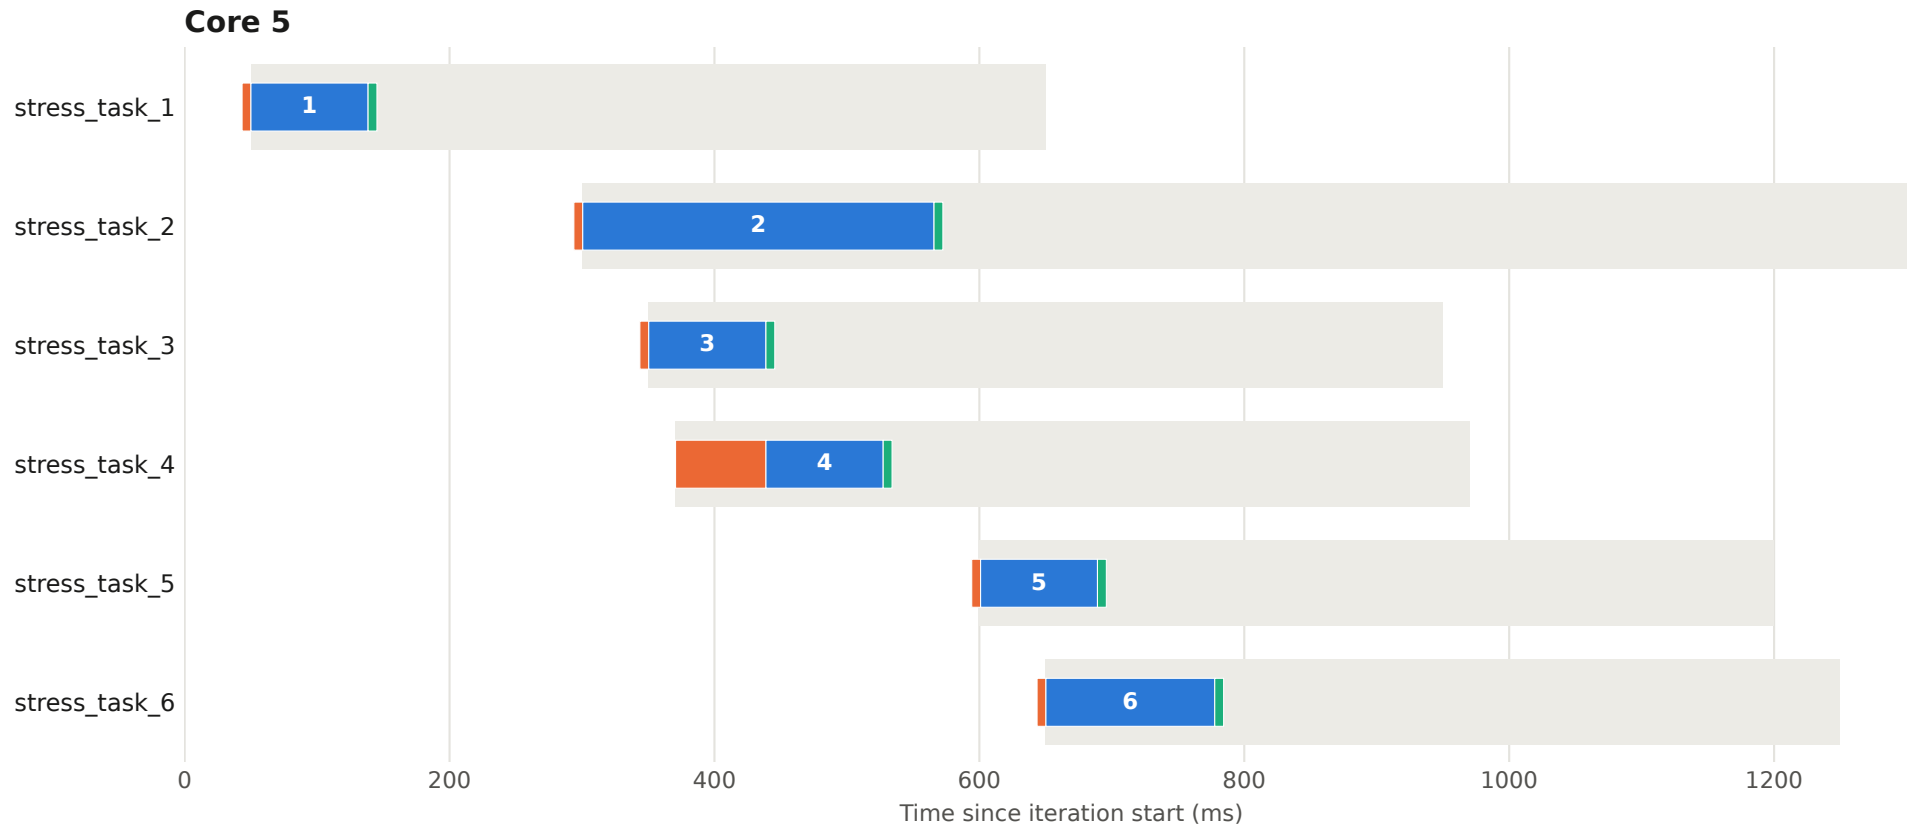


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 75 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

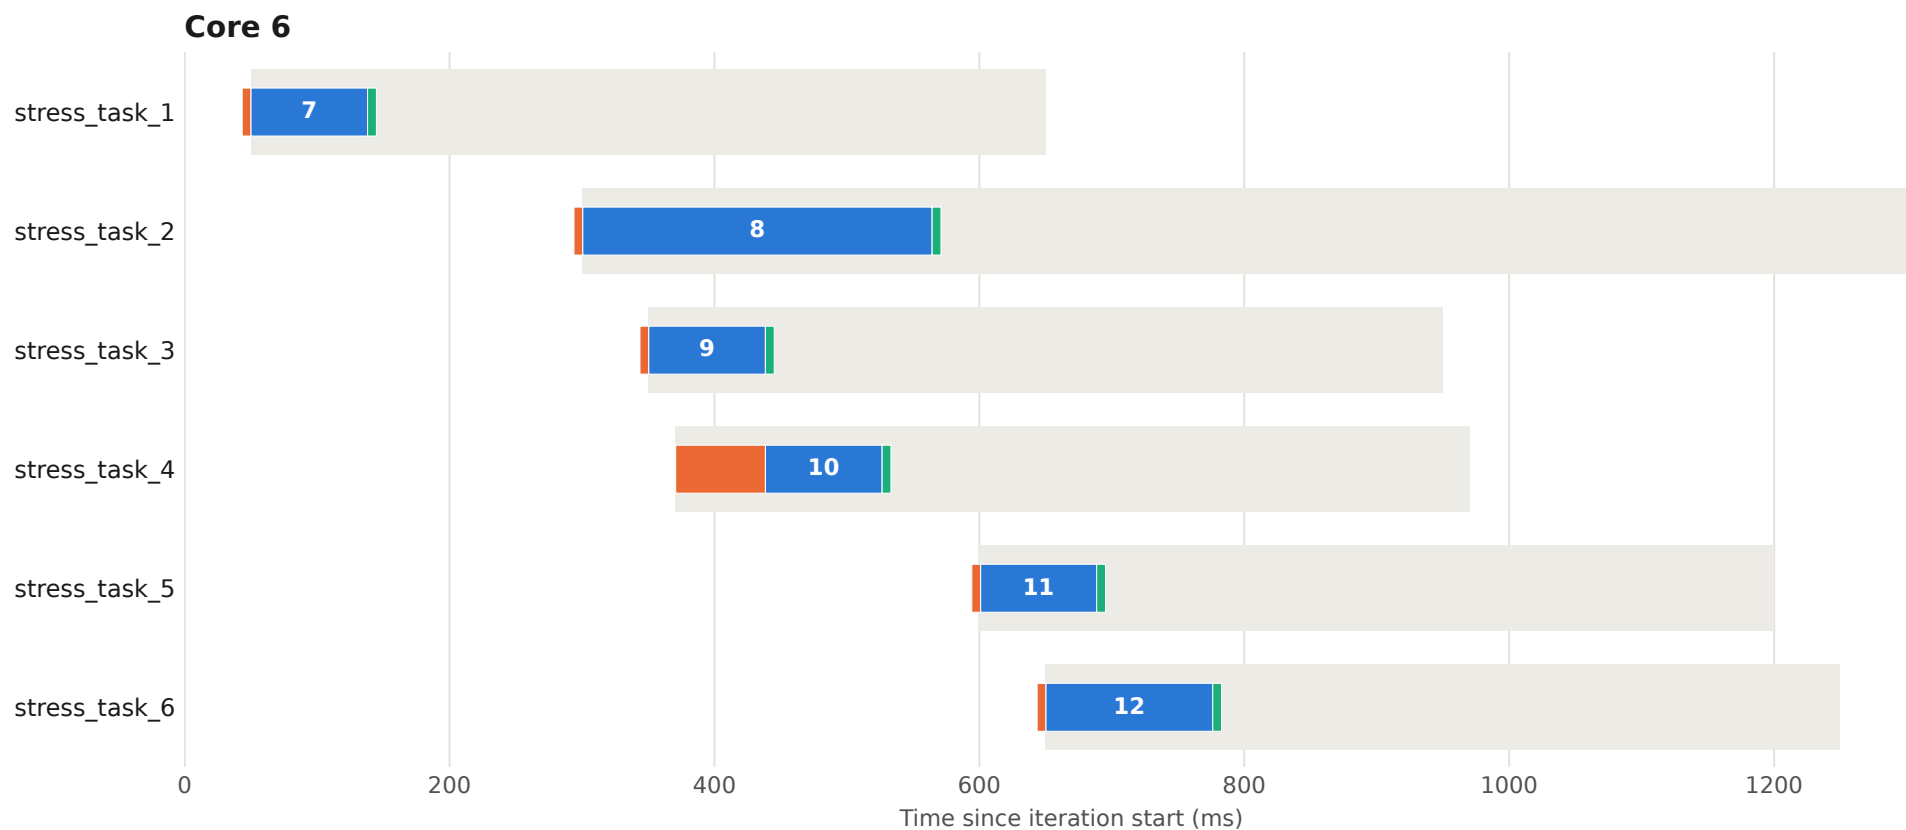


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 76 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

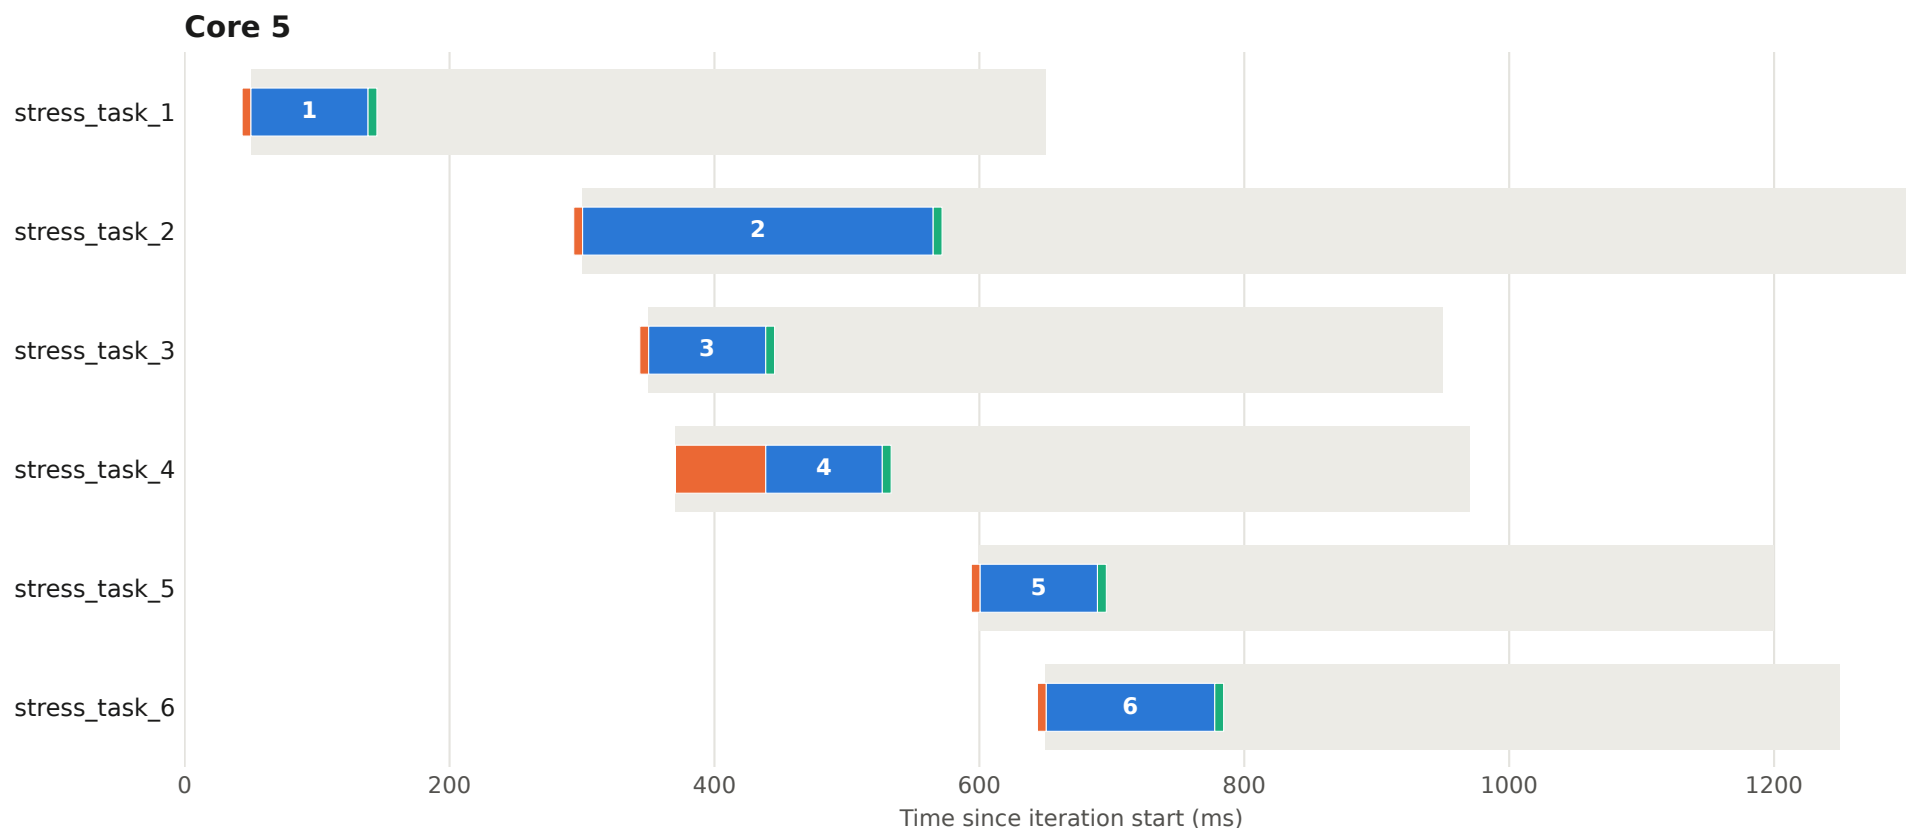


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 76 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

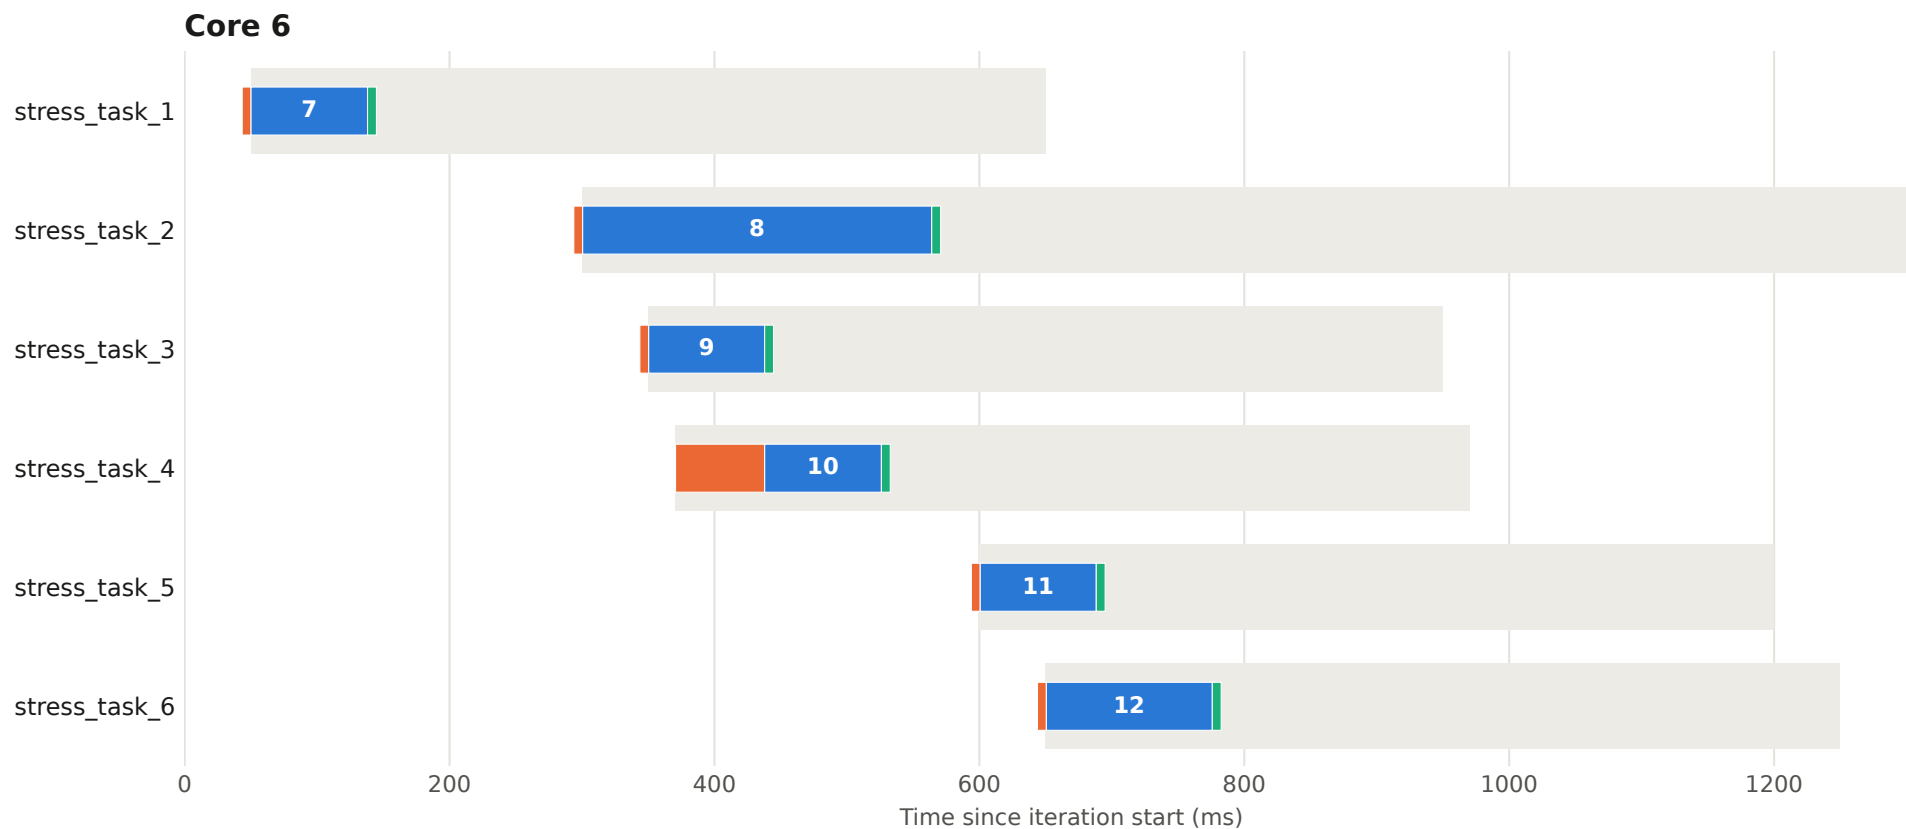


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 77 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

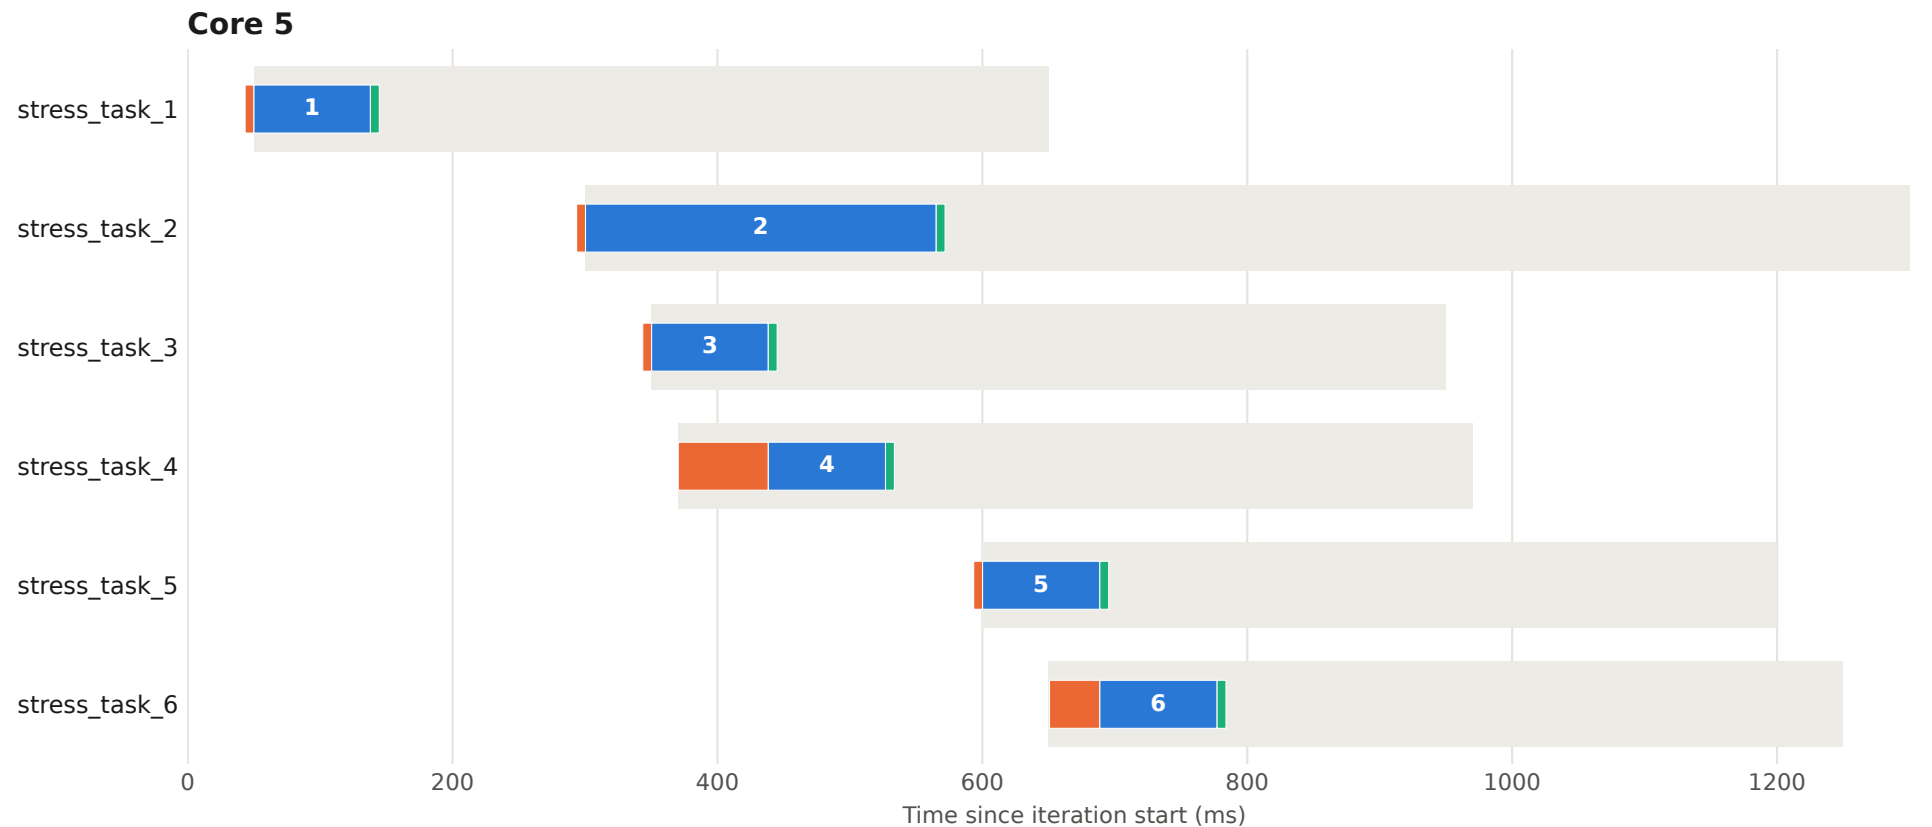


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 77 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

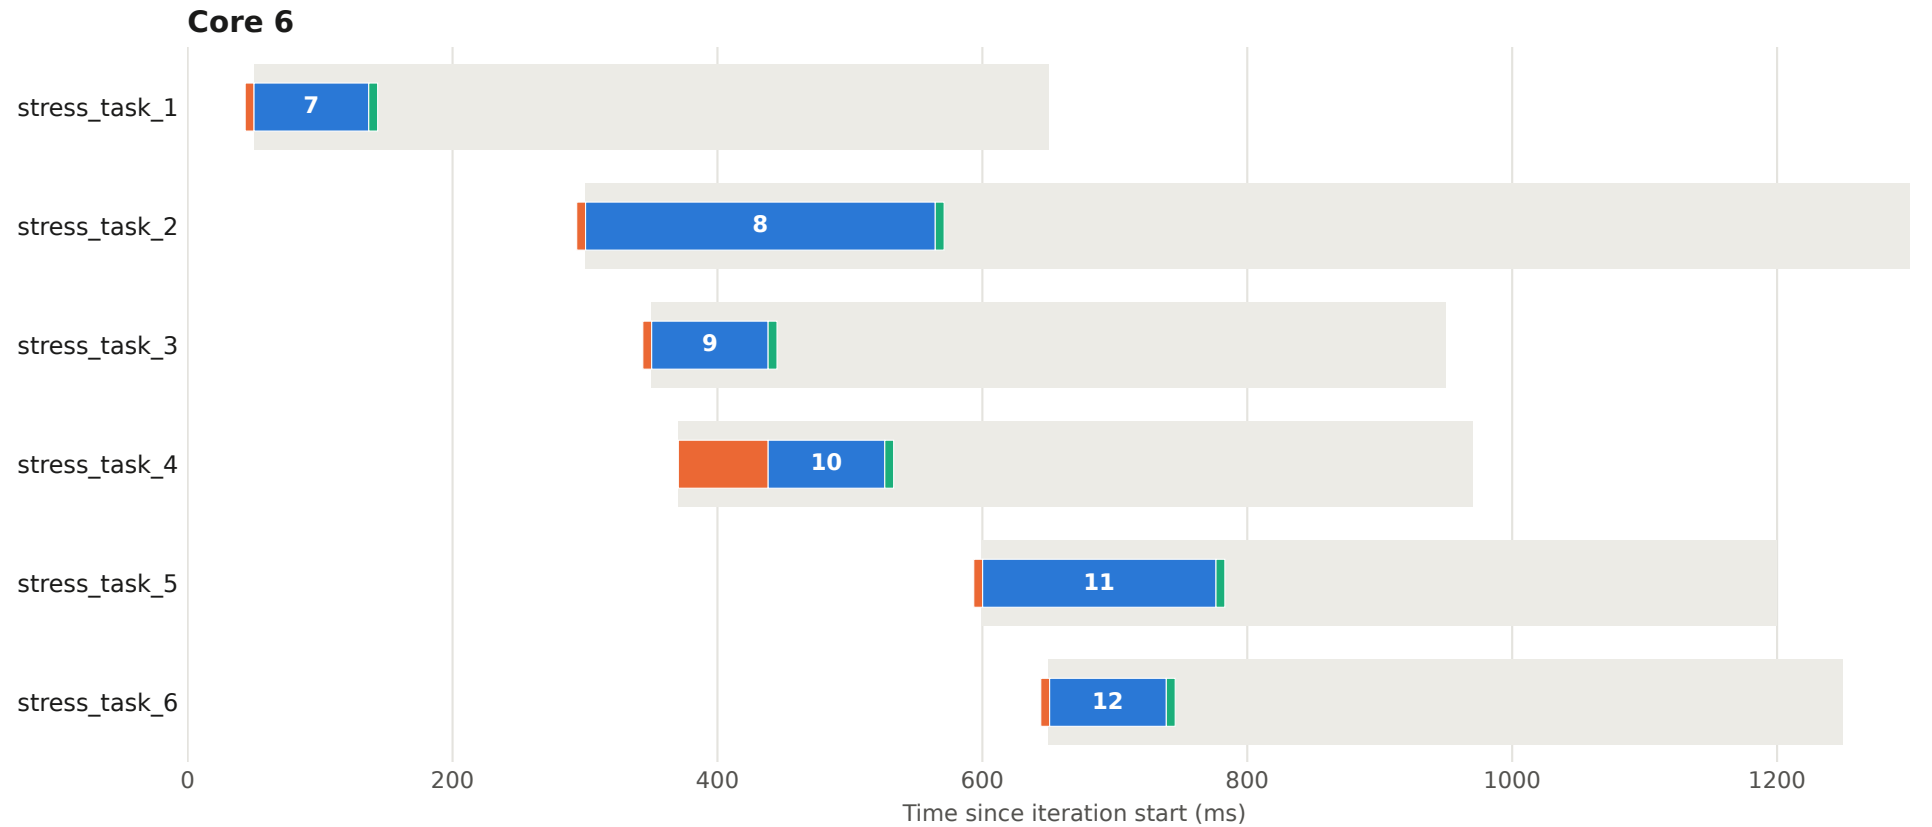


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 78 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

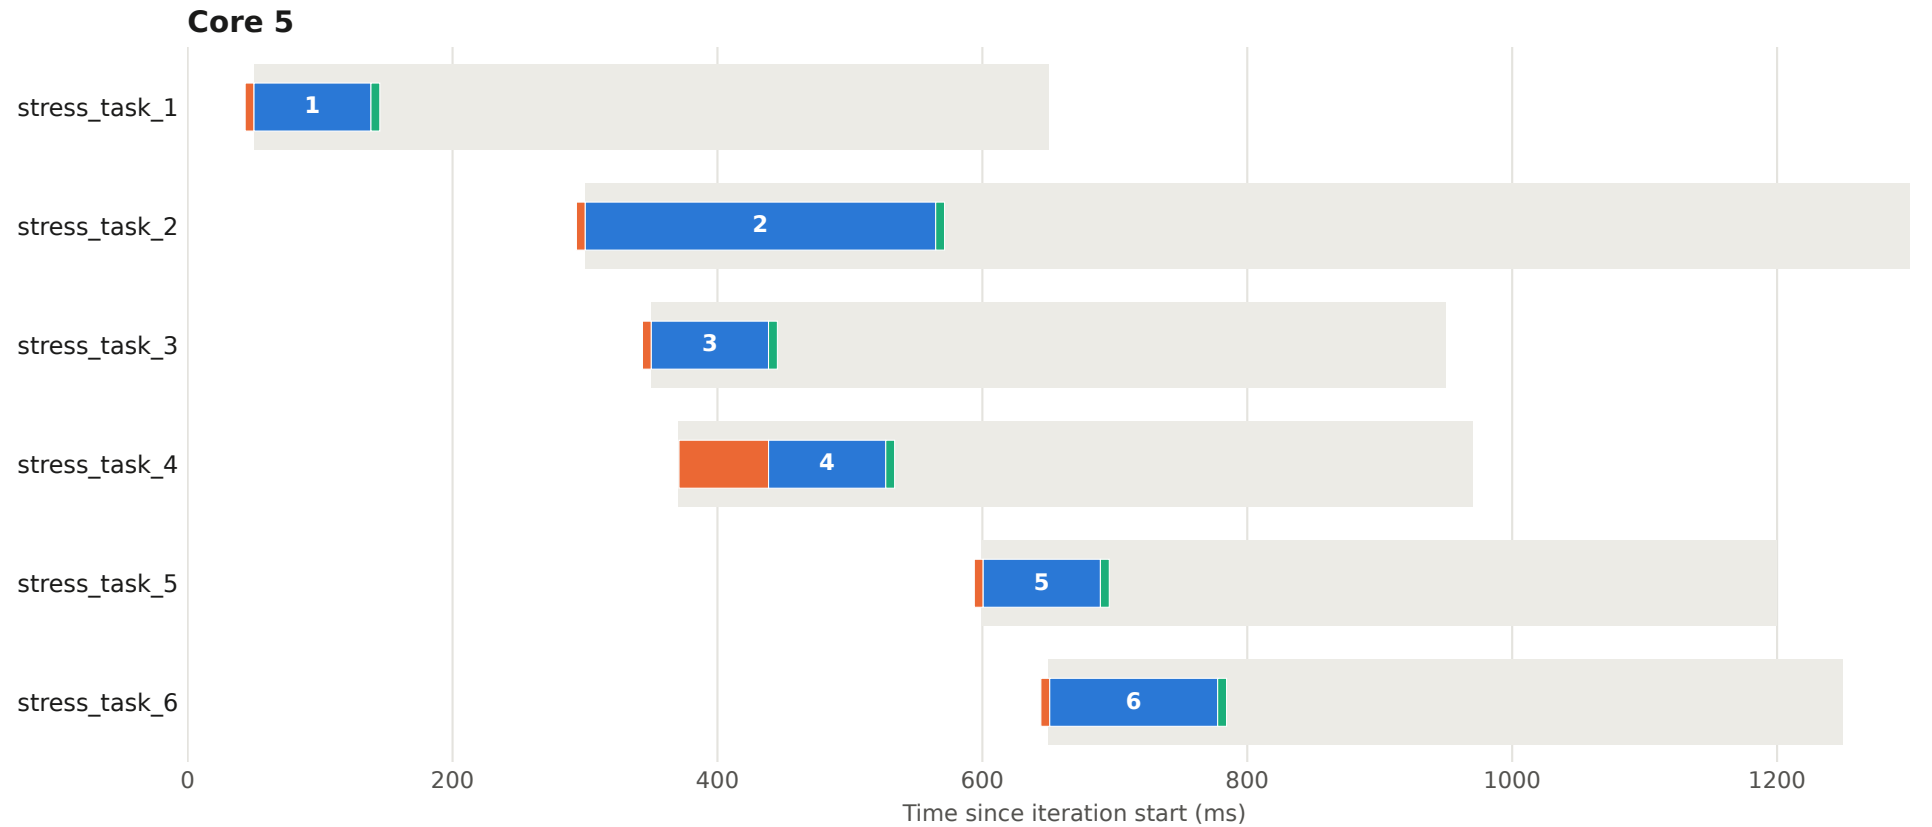


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 78 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

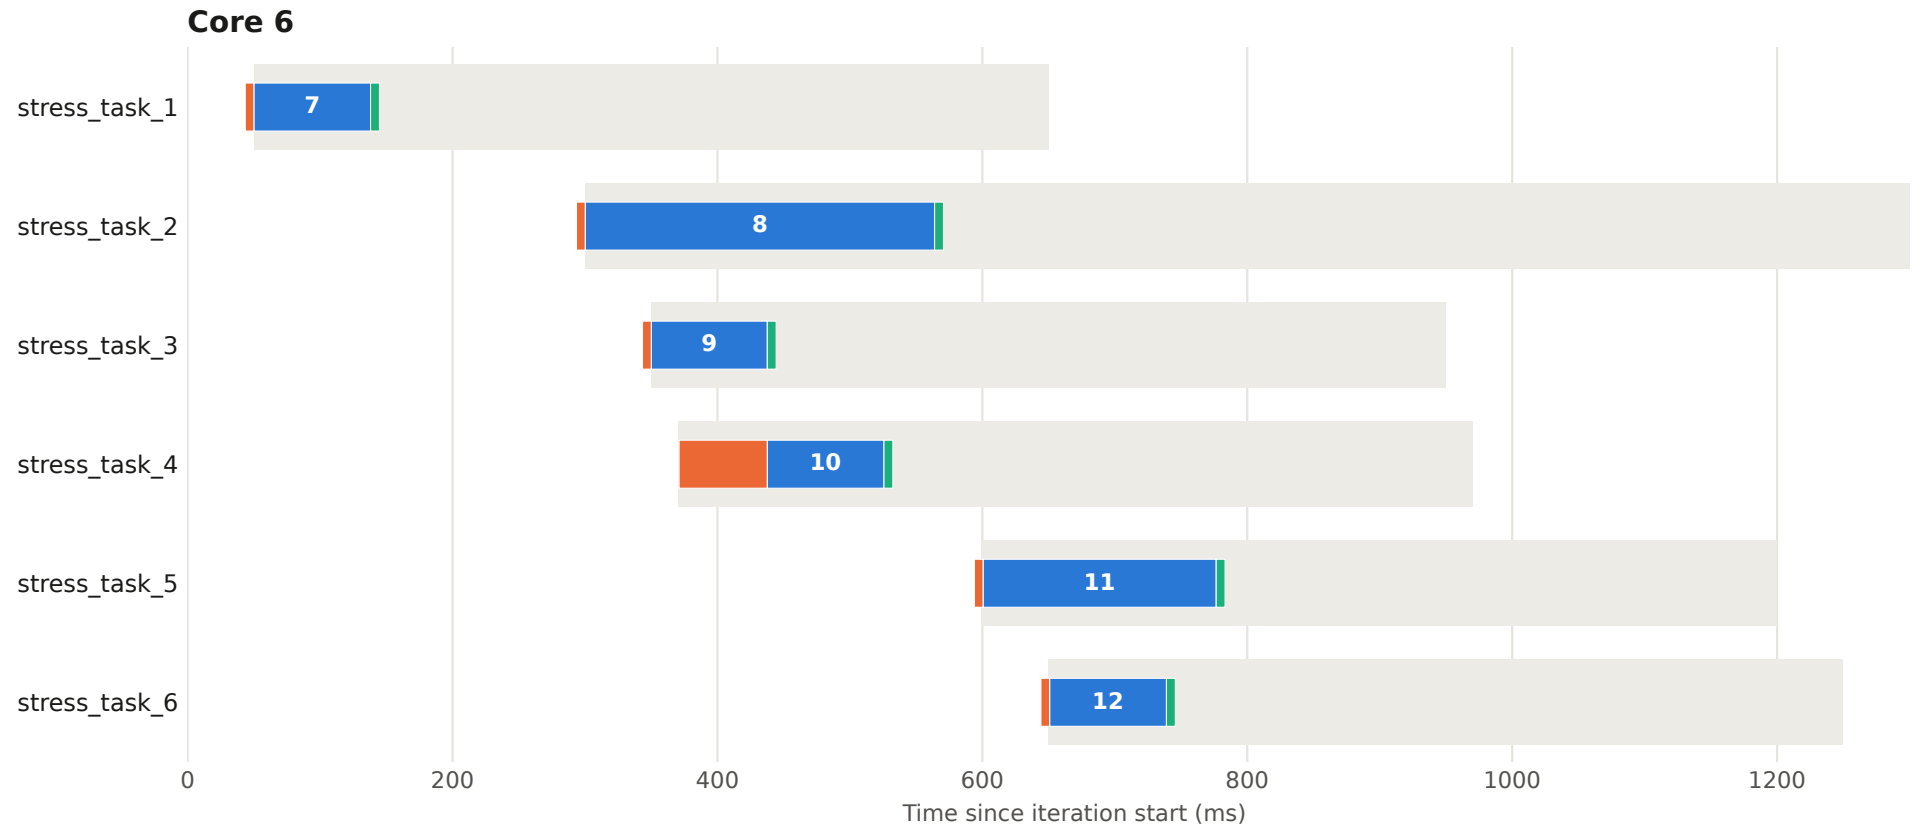


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 79 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

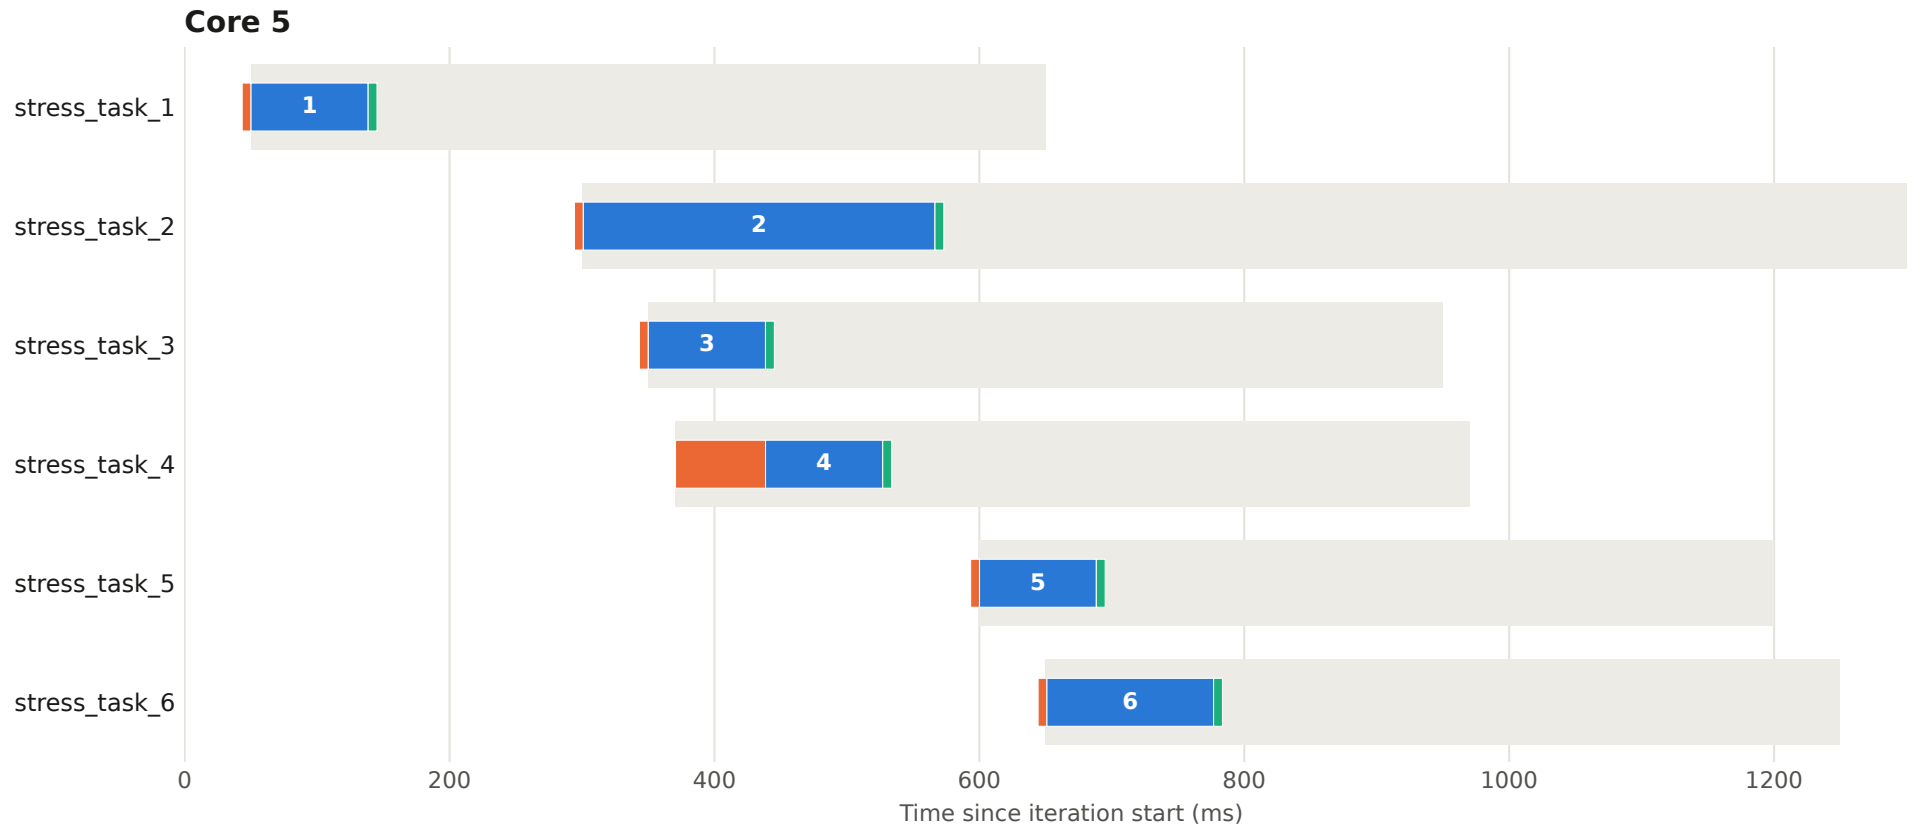


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 79 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

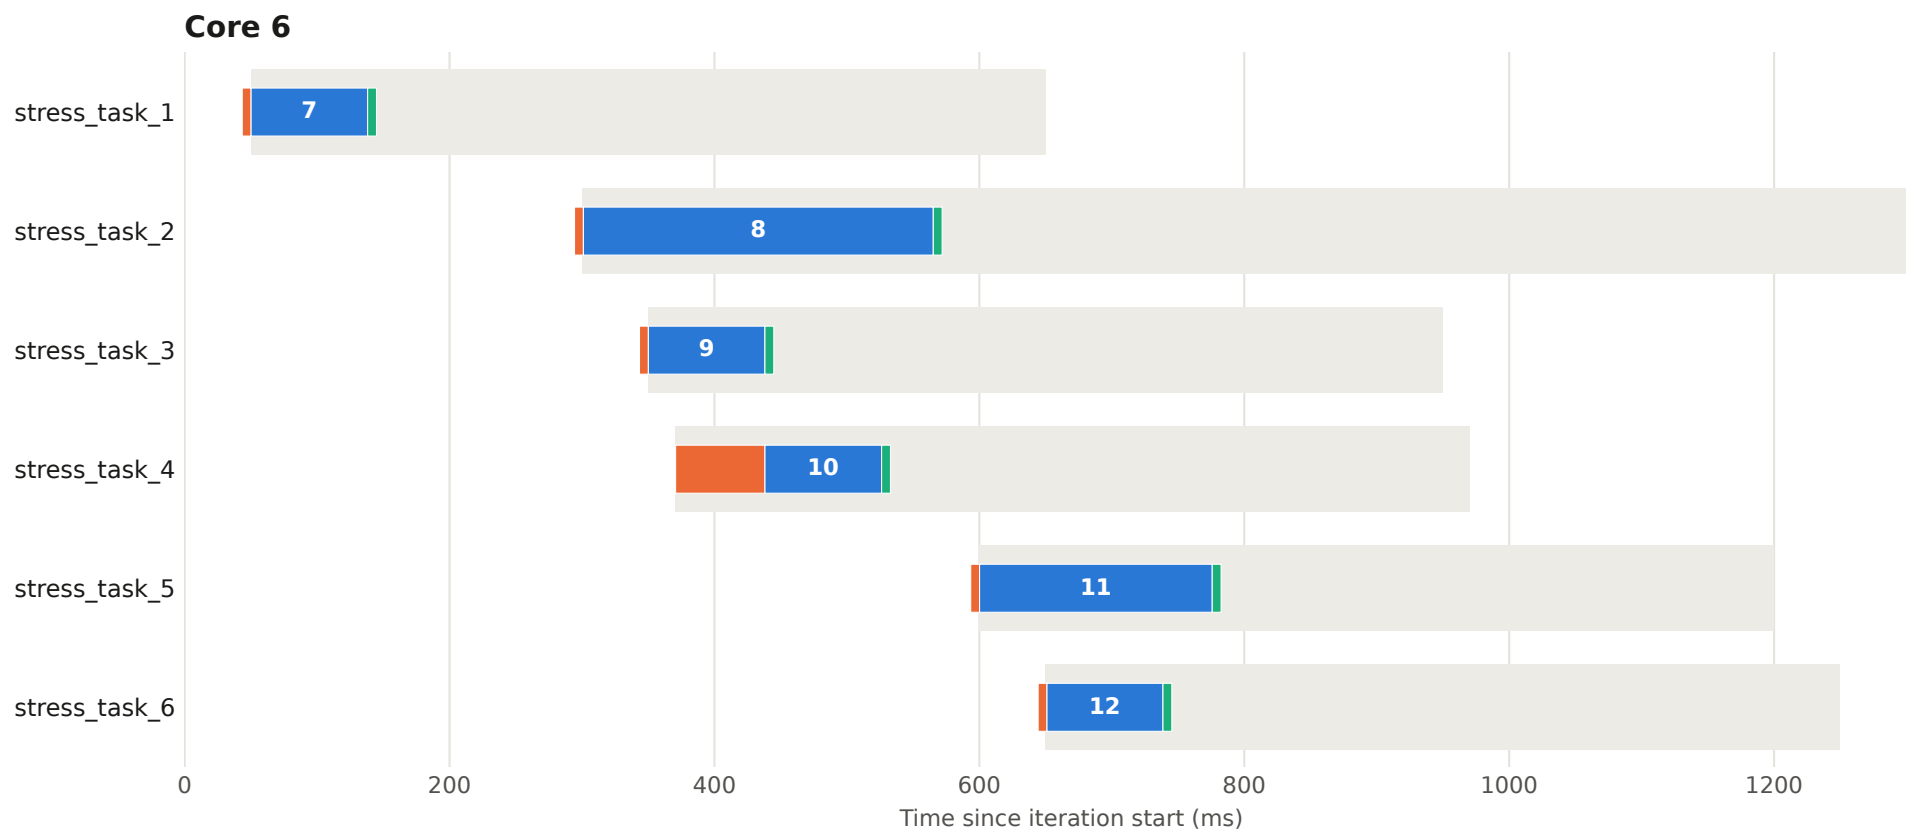


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 80 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

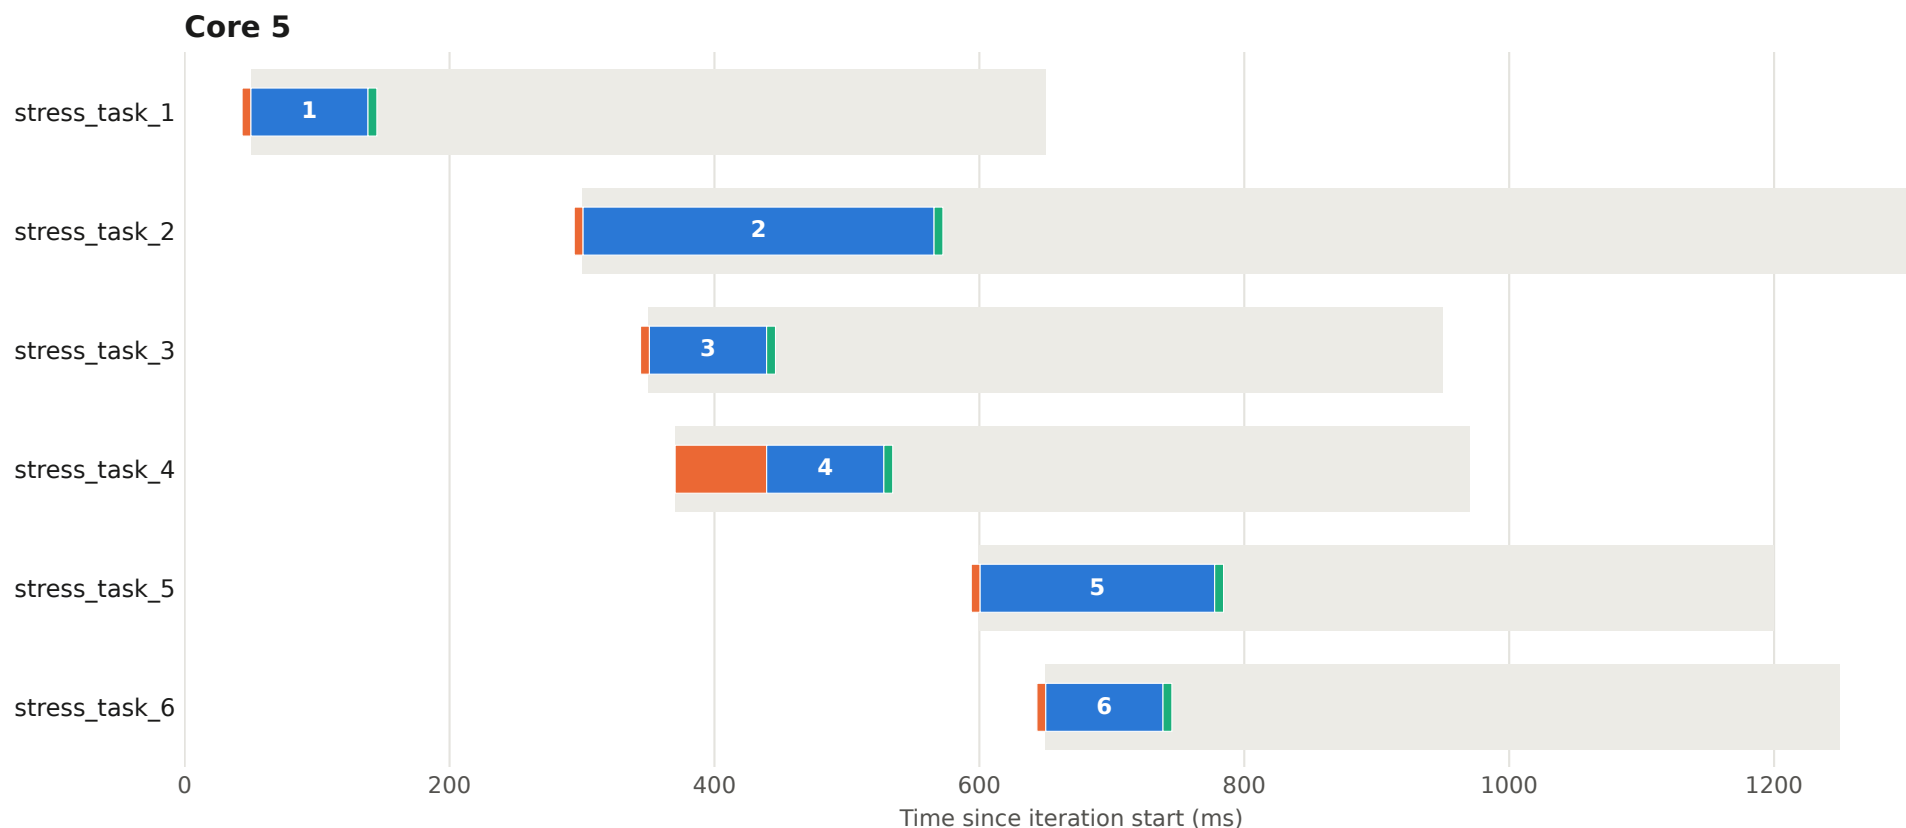


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 80 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

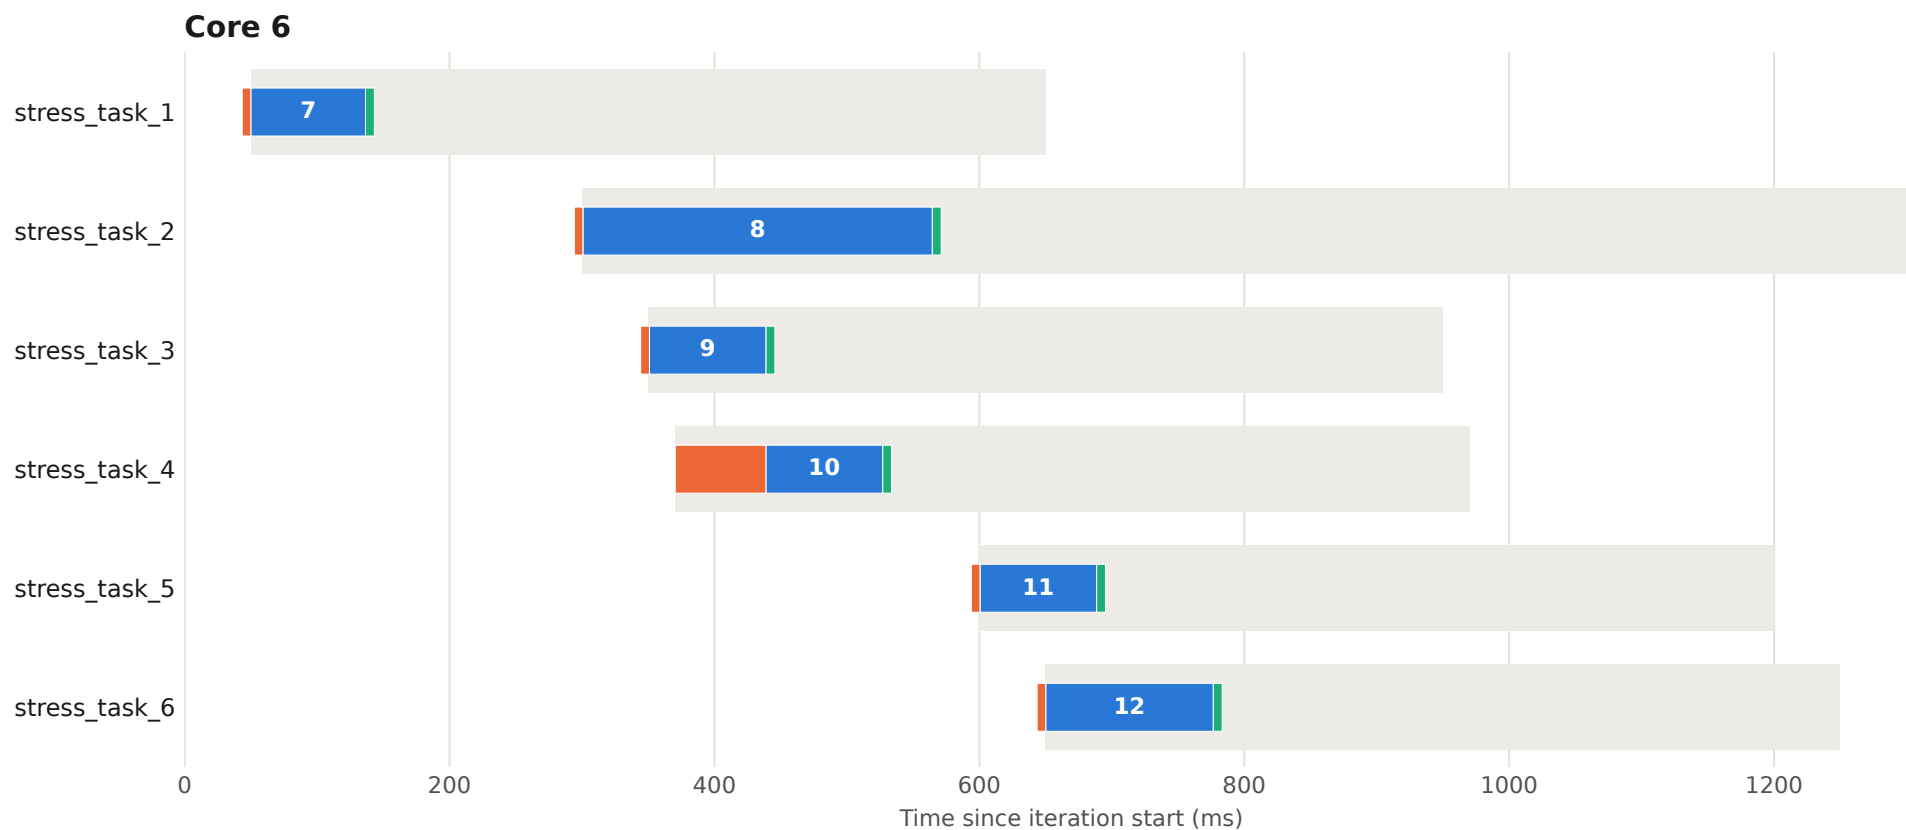


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 81 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

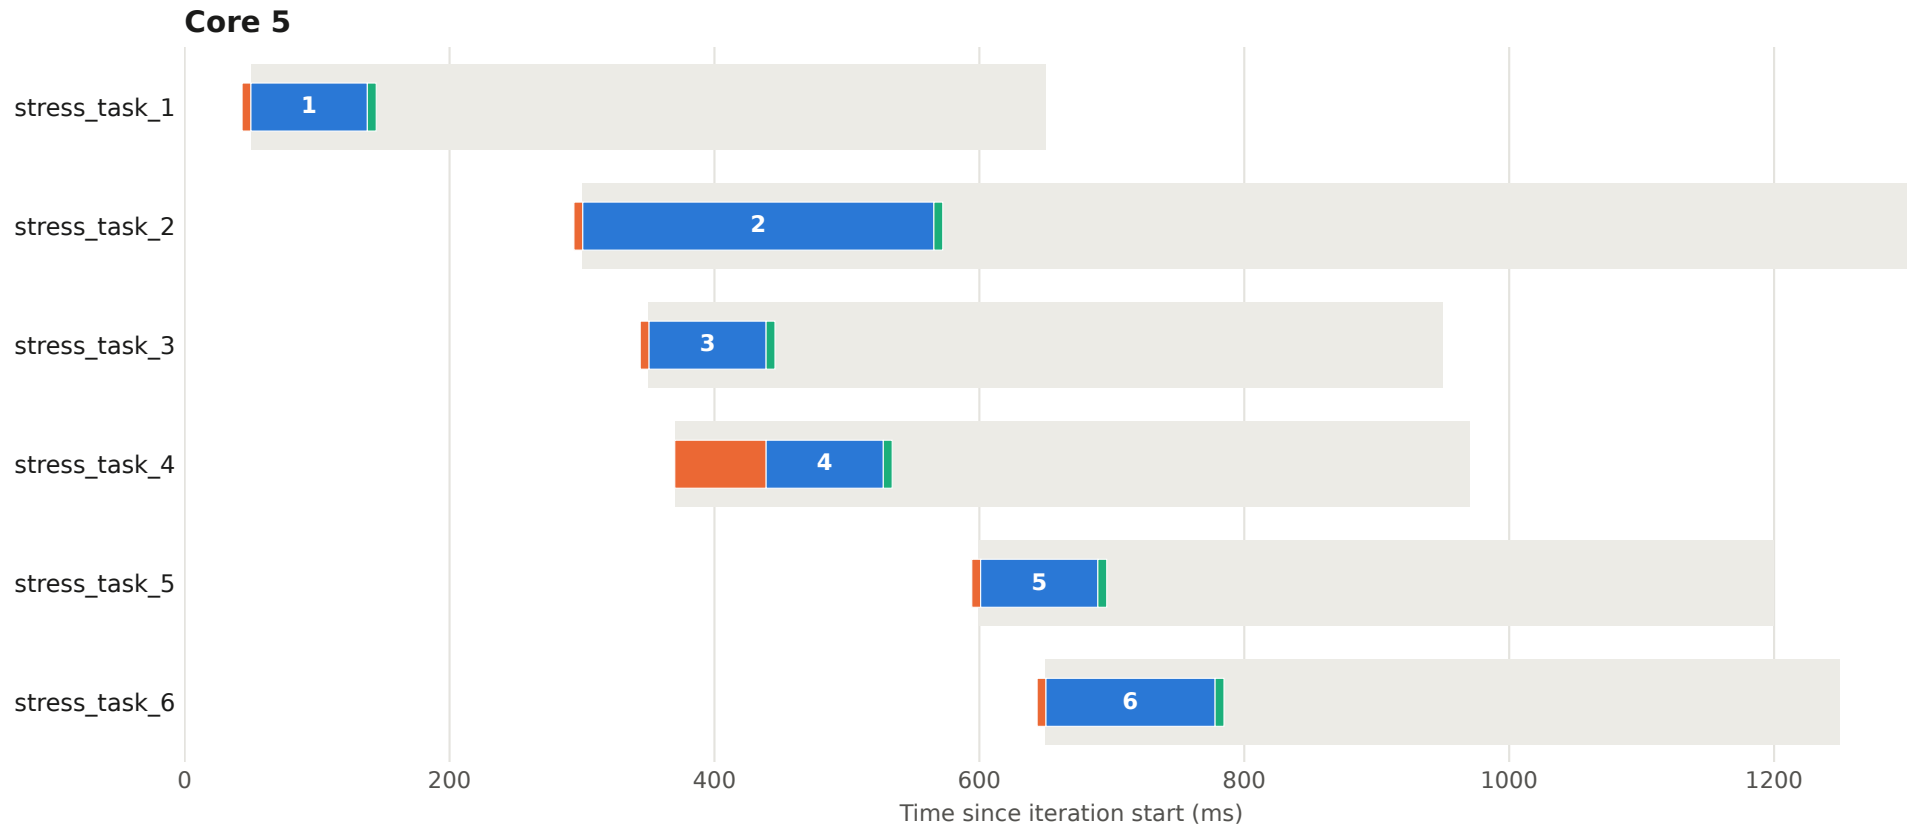


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 81 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

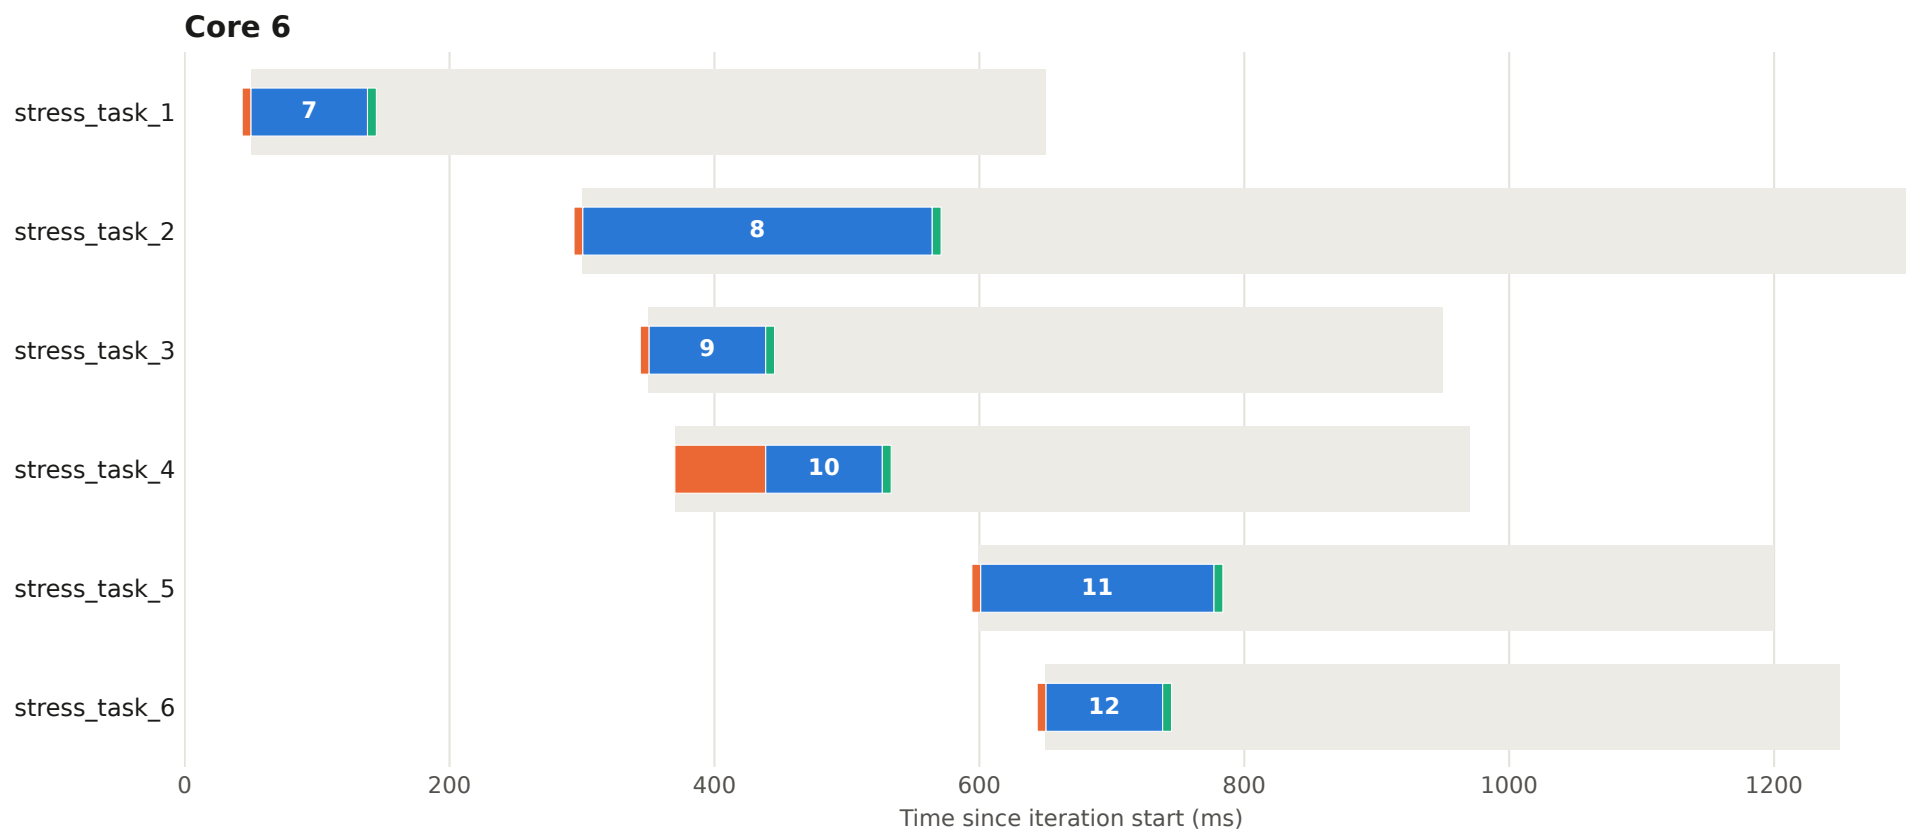


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 82 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

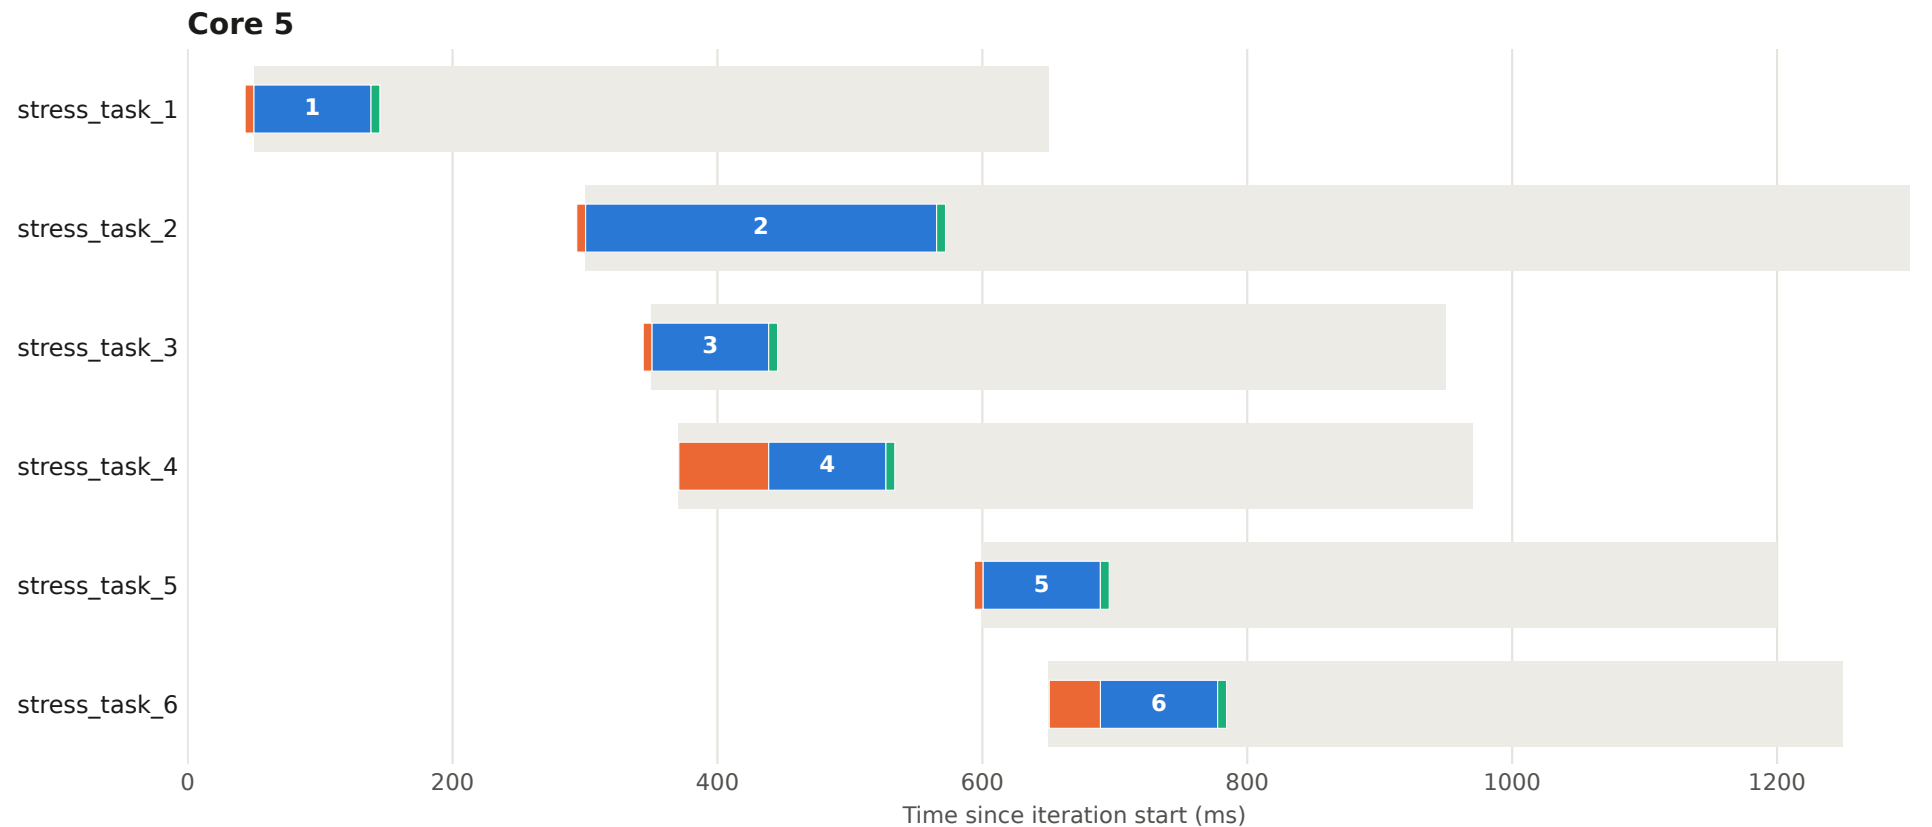


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 82 - core 6

One chart per core; each bar is one task call.


- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

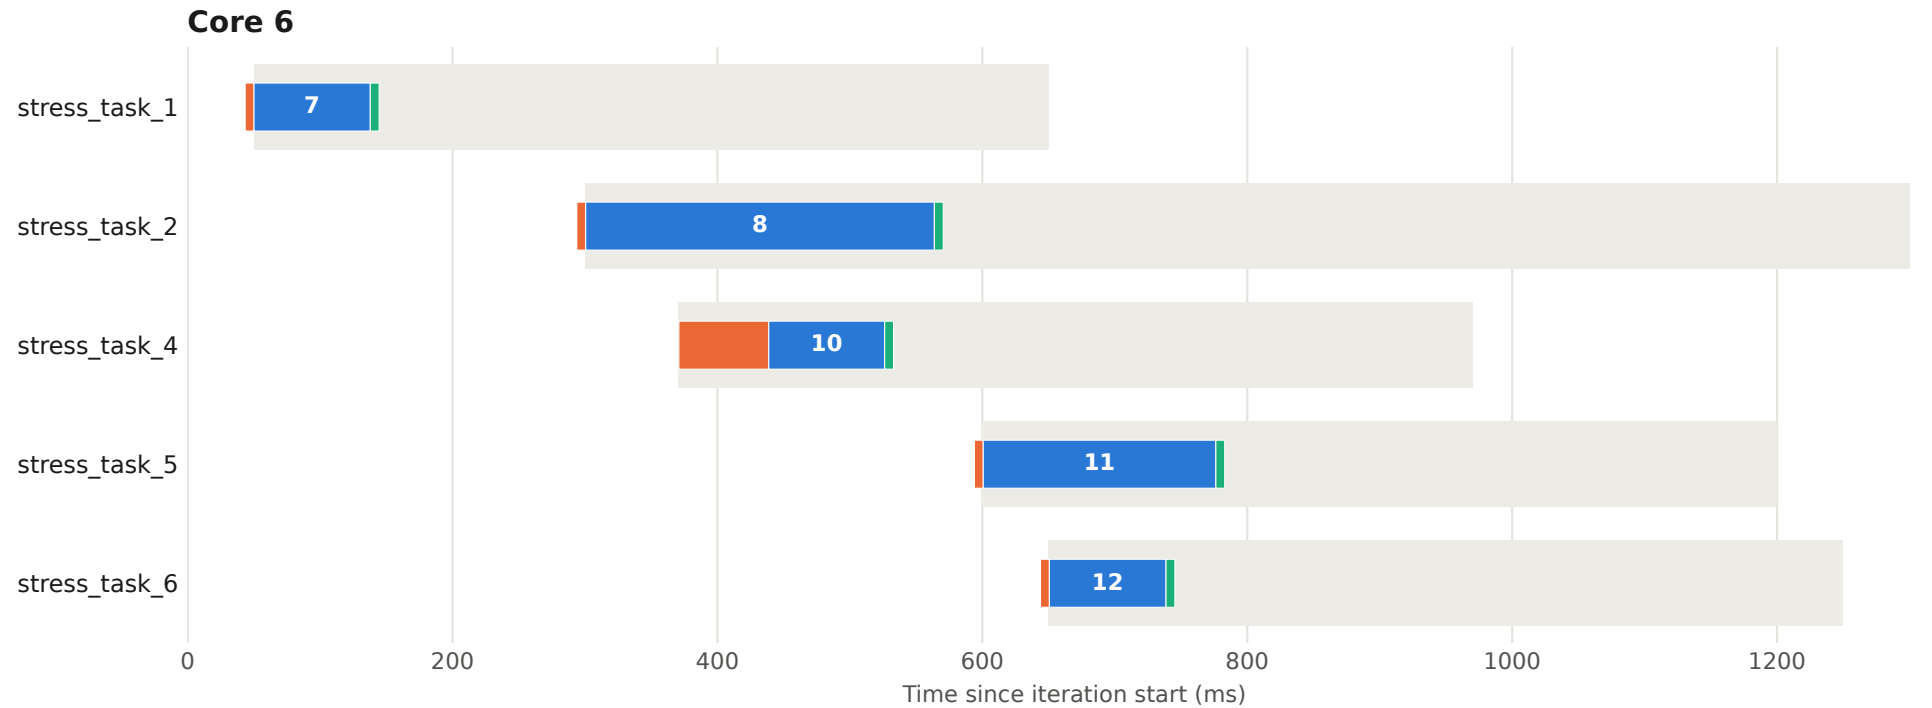

Execution plan - iteration 83 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

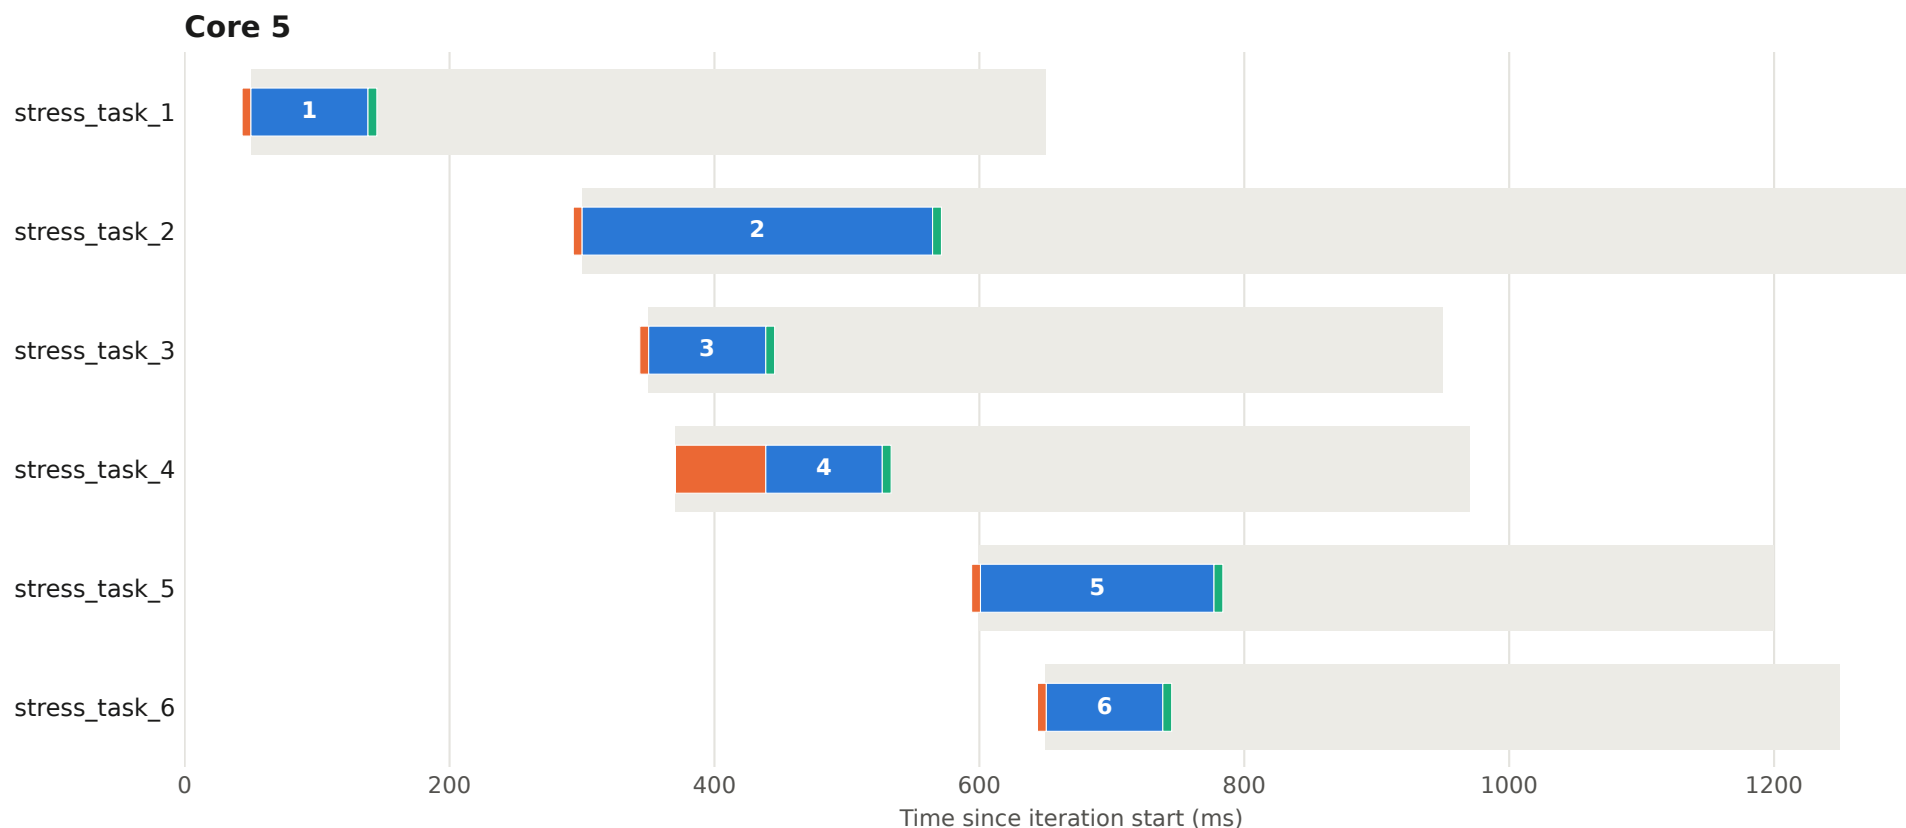


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 83 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

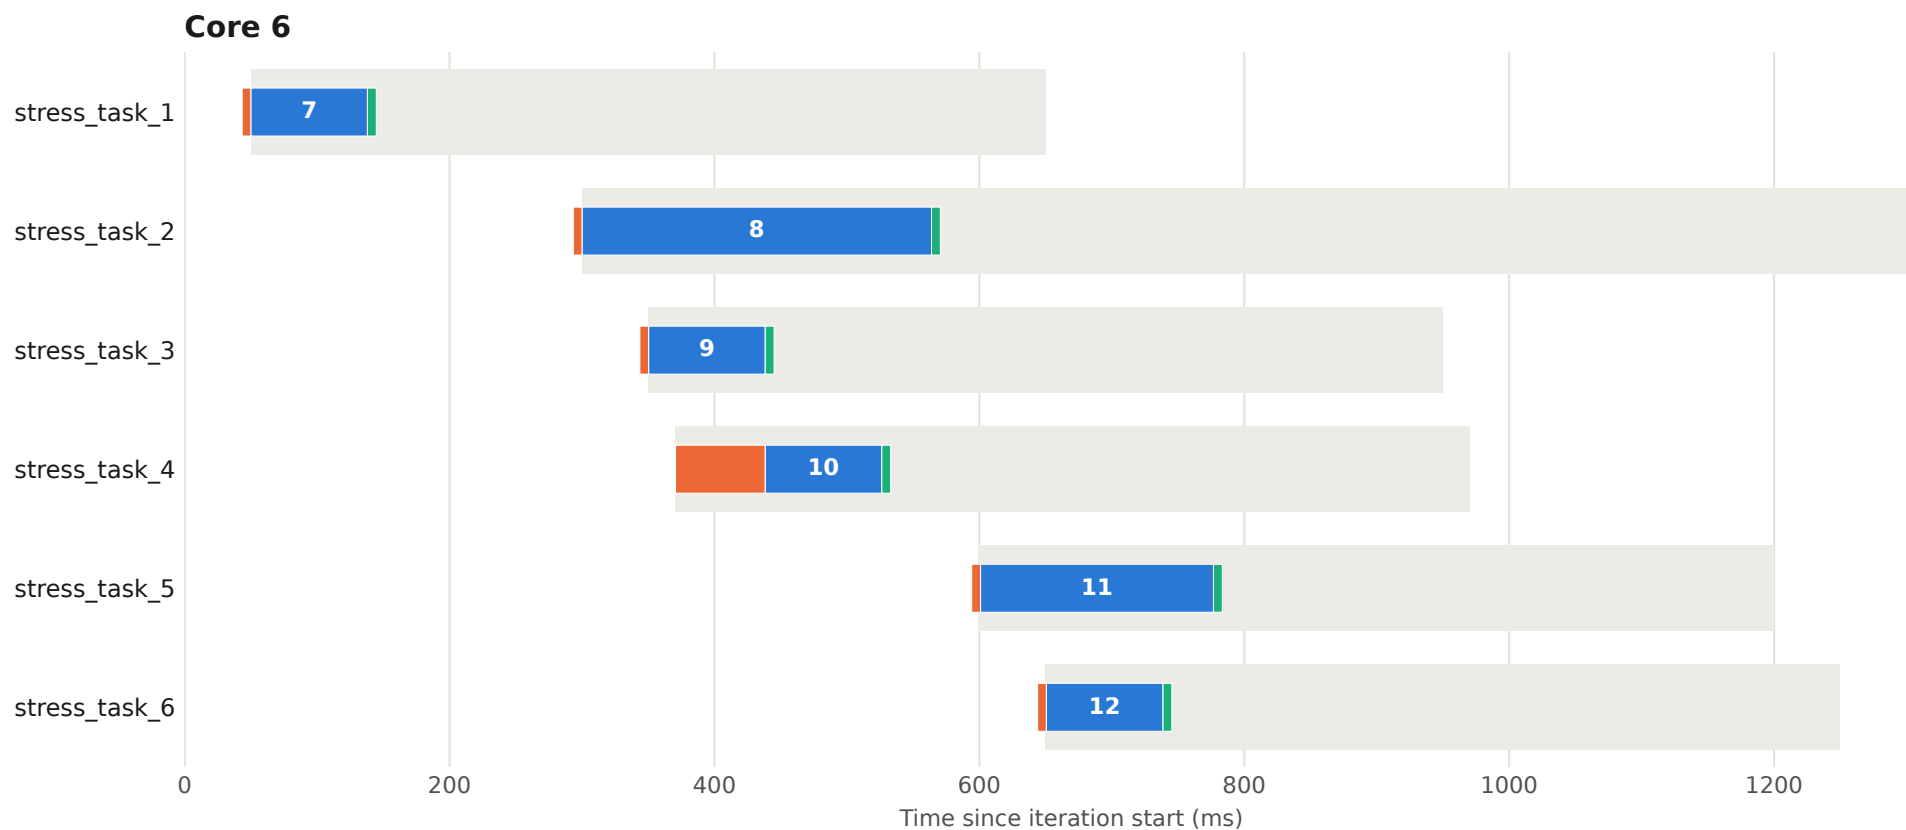


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 84 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

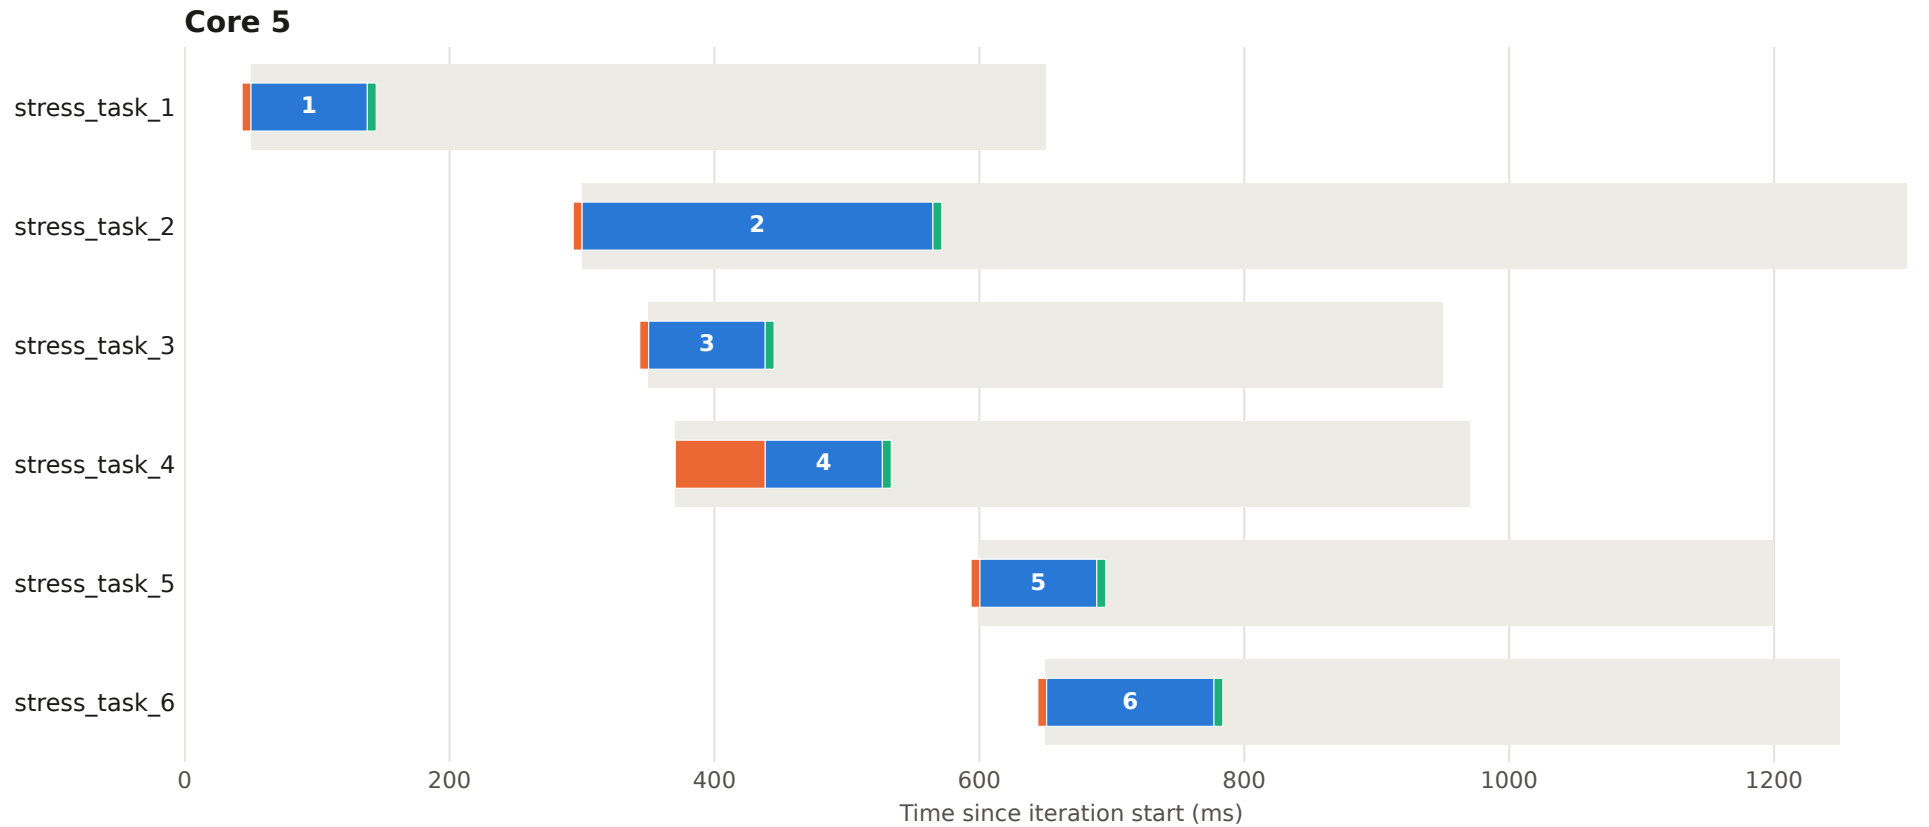


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 84 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

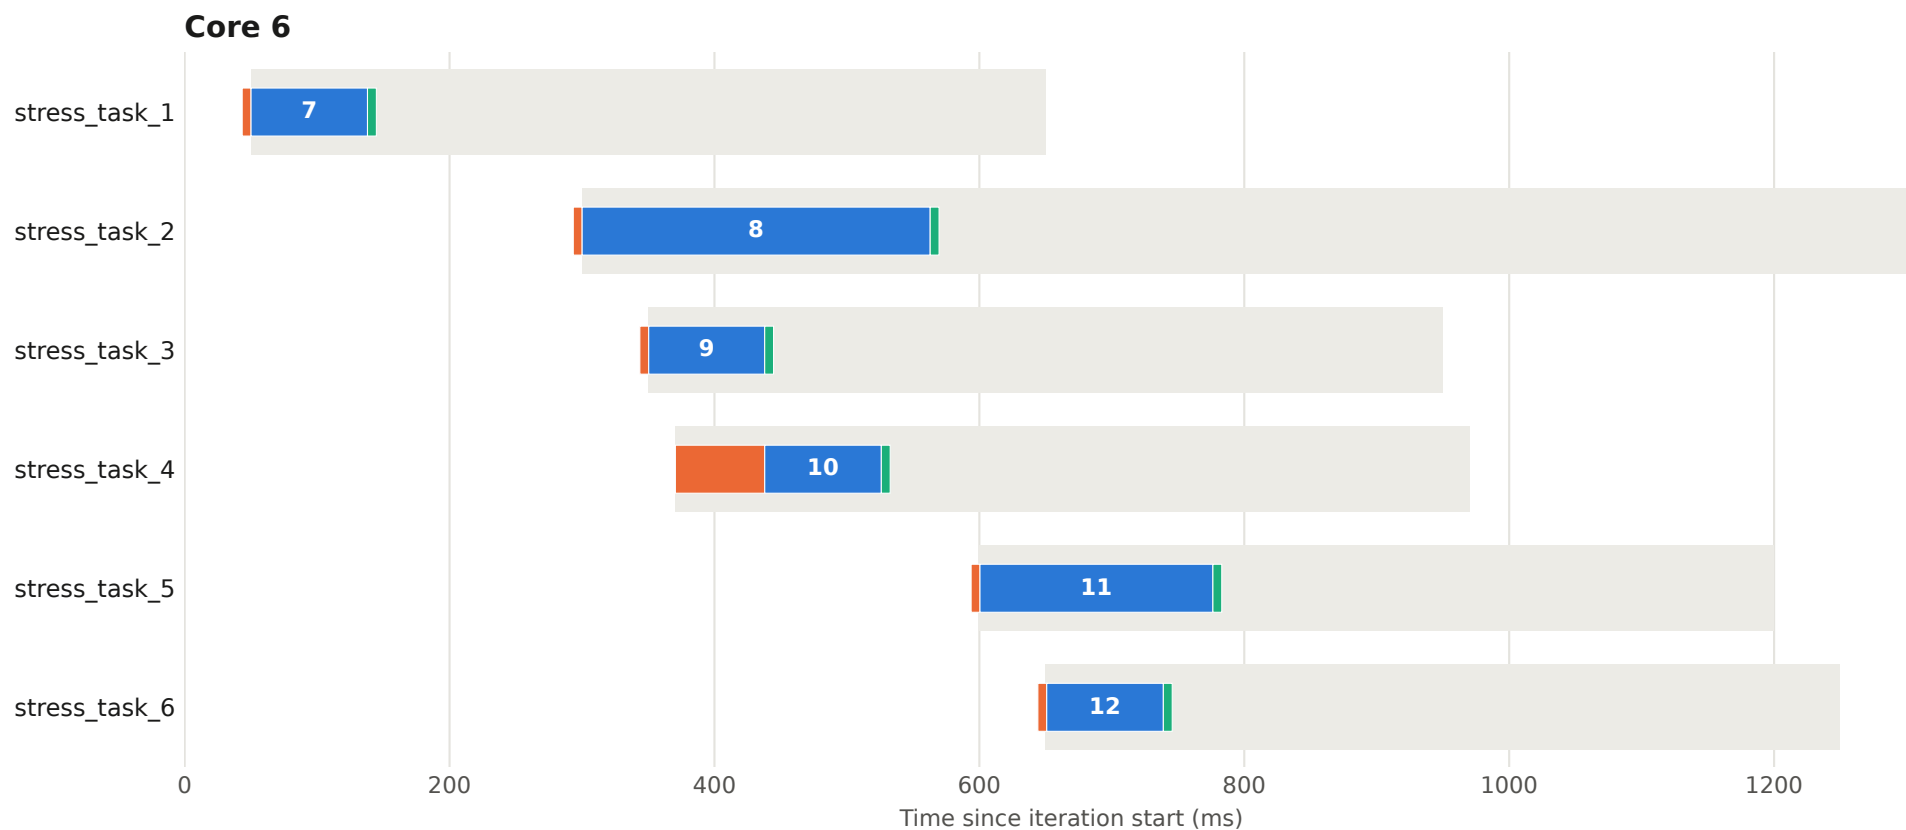


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 85 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

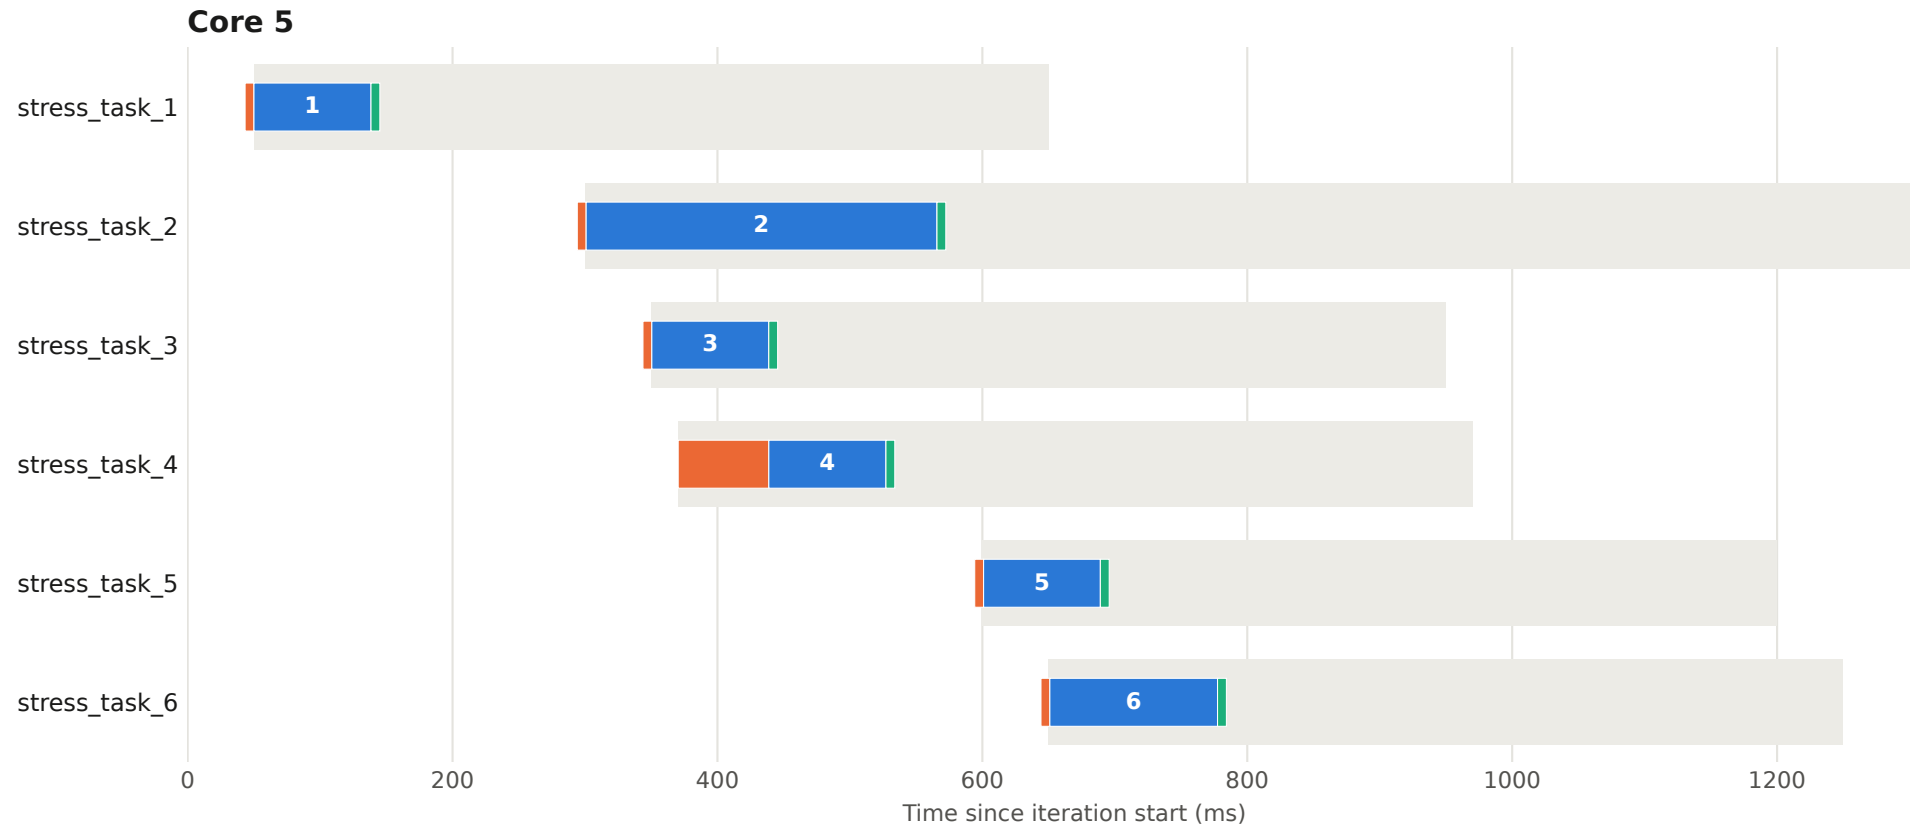


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 85 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

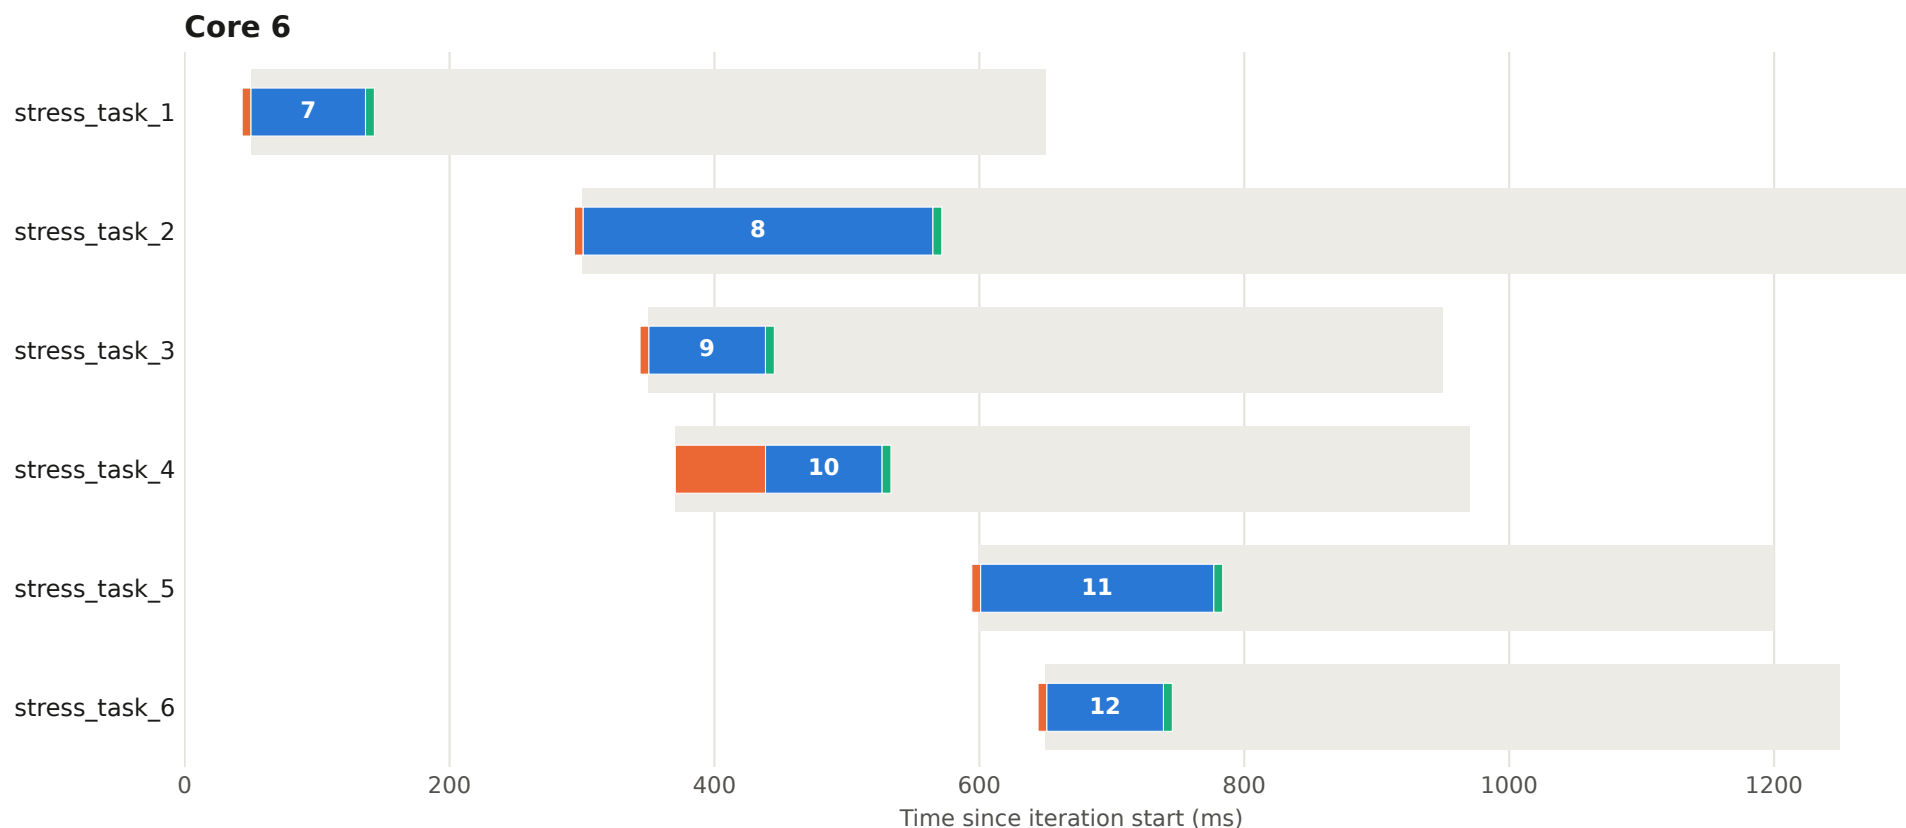


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 86 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

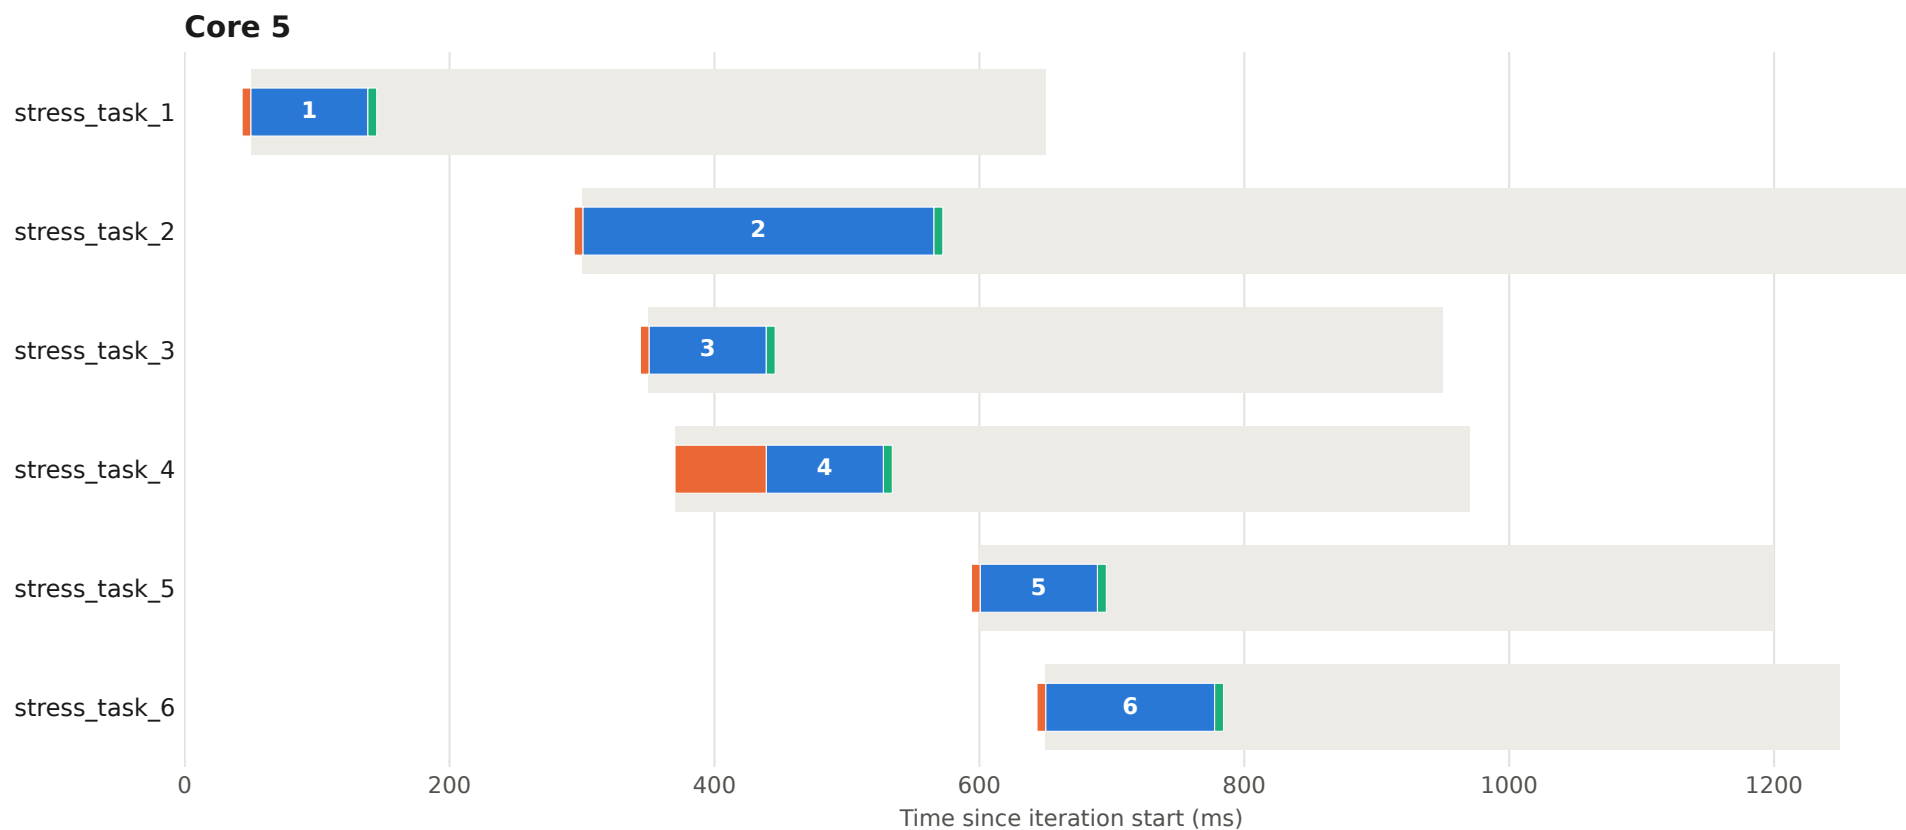


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 86 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

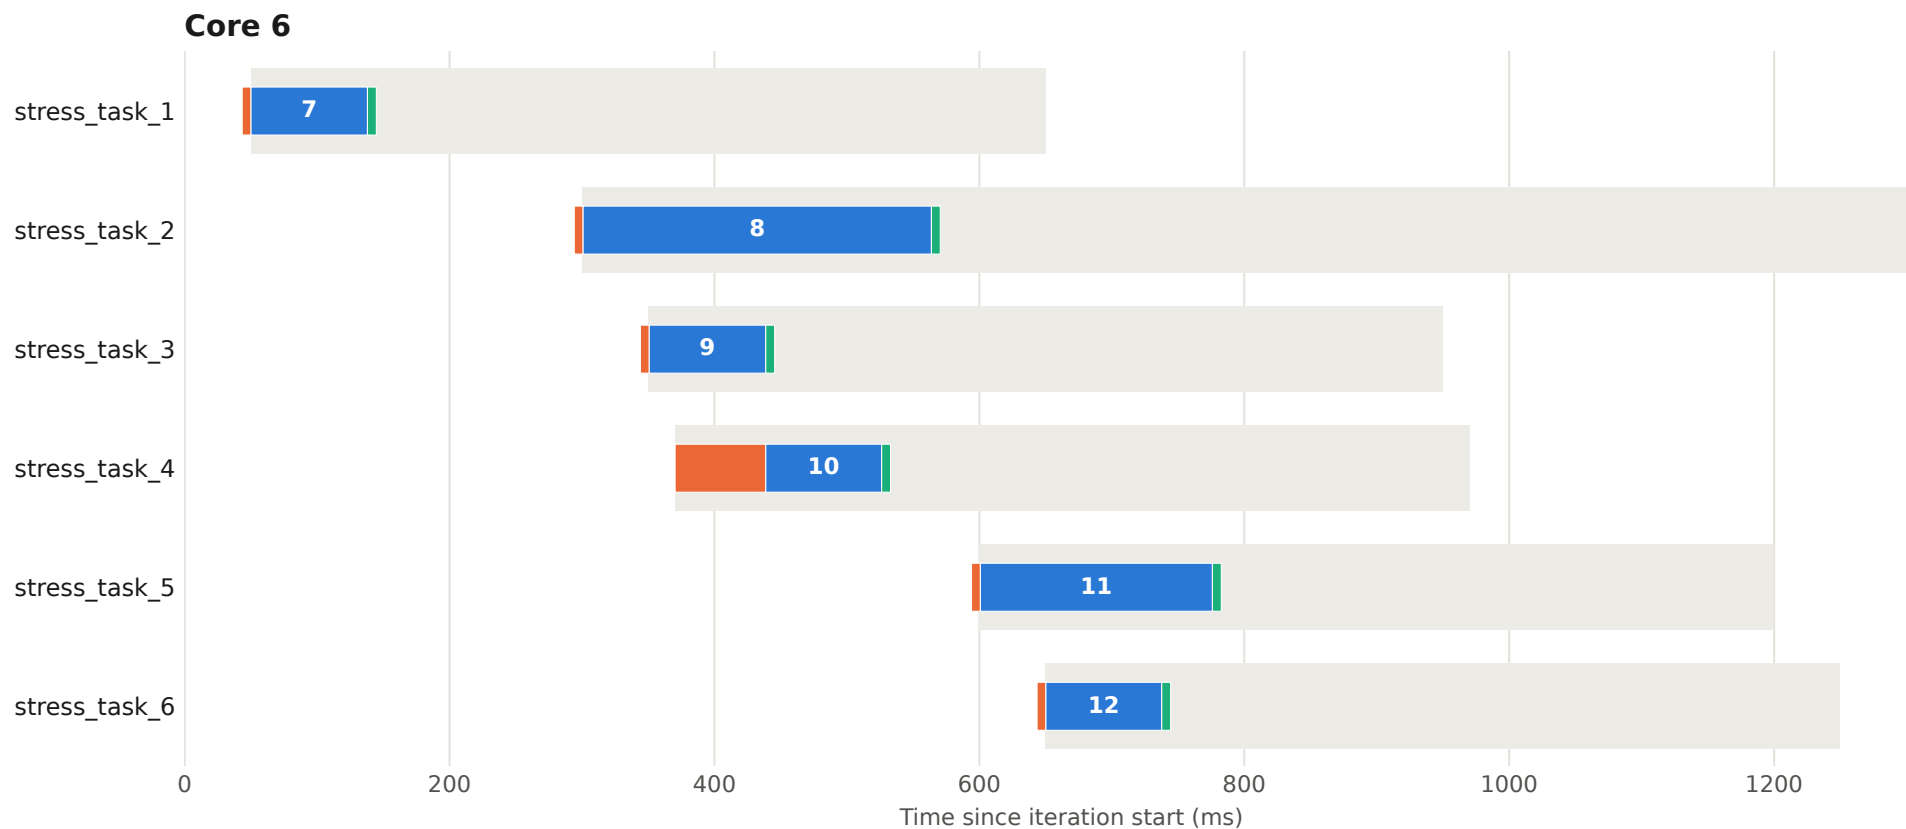


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 87 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

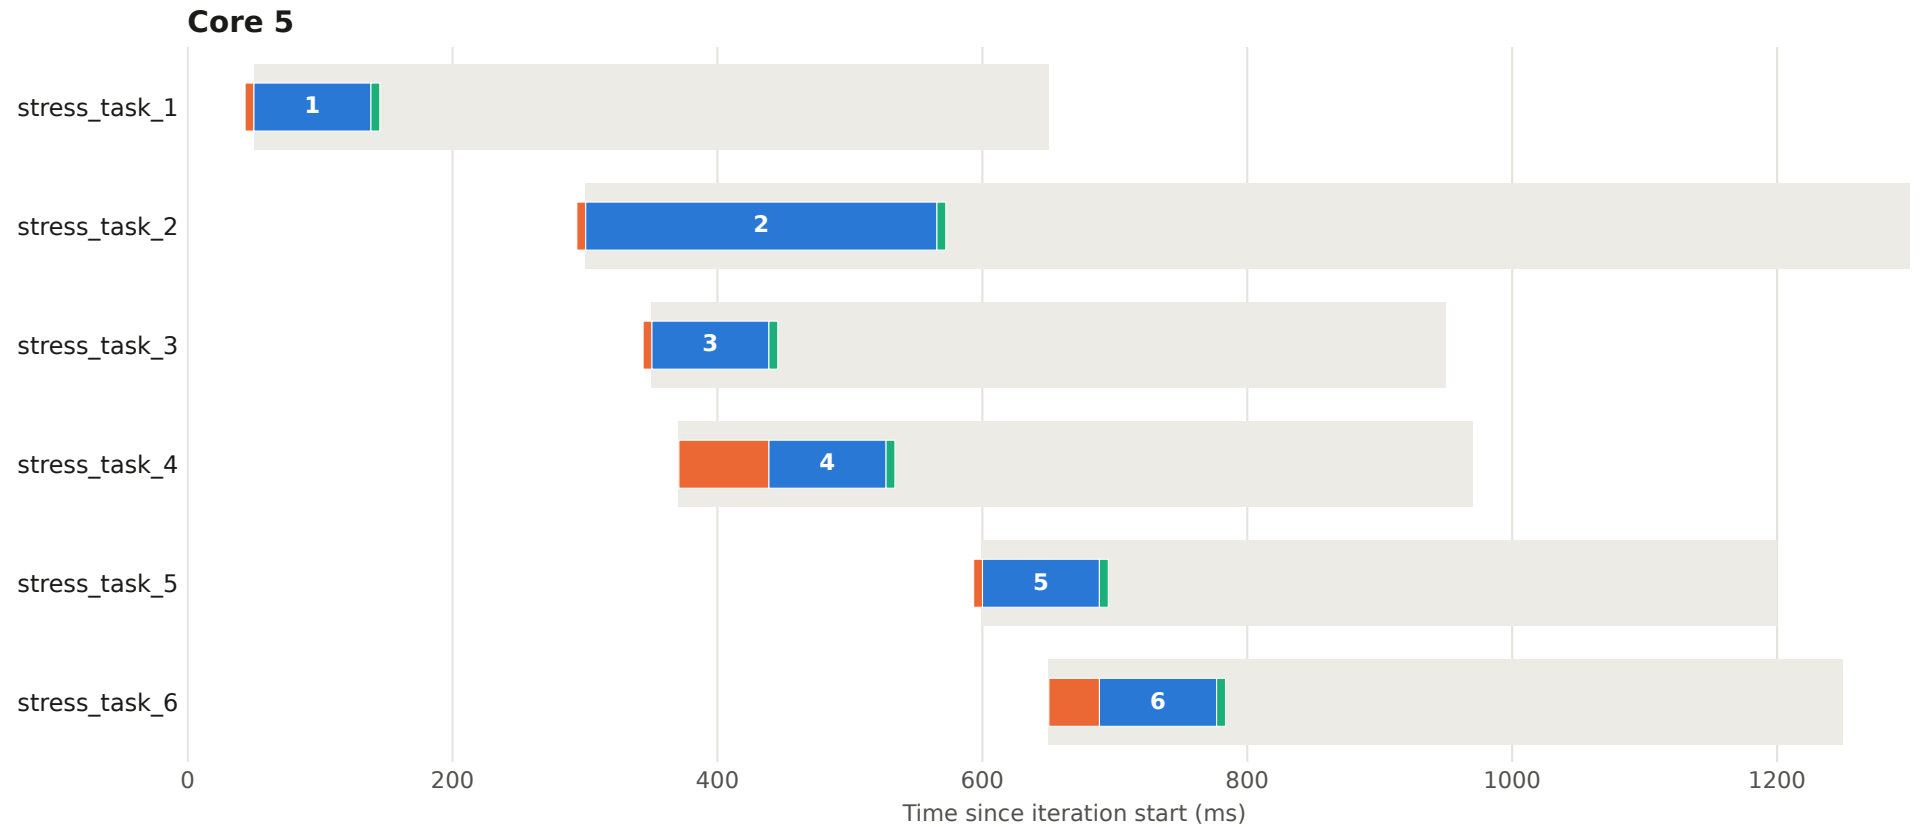


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 87 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

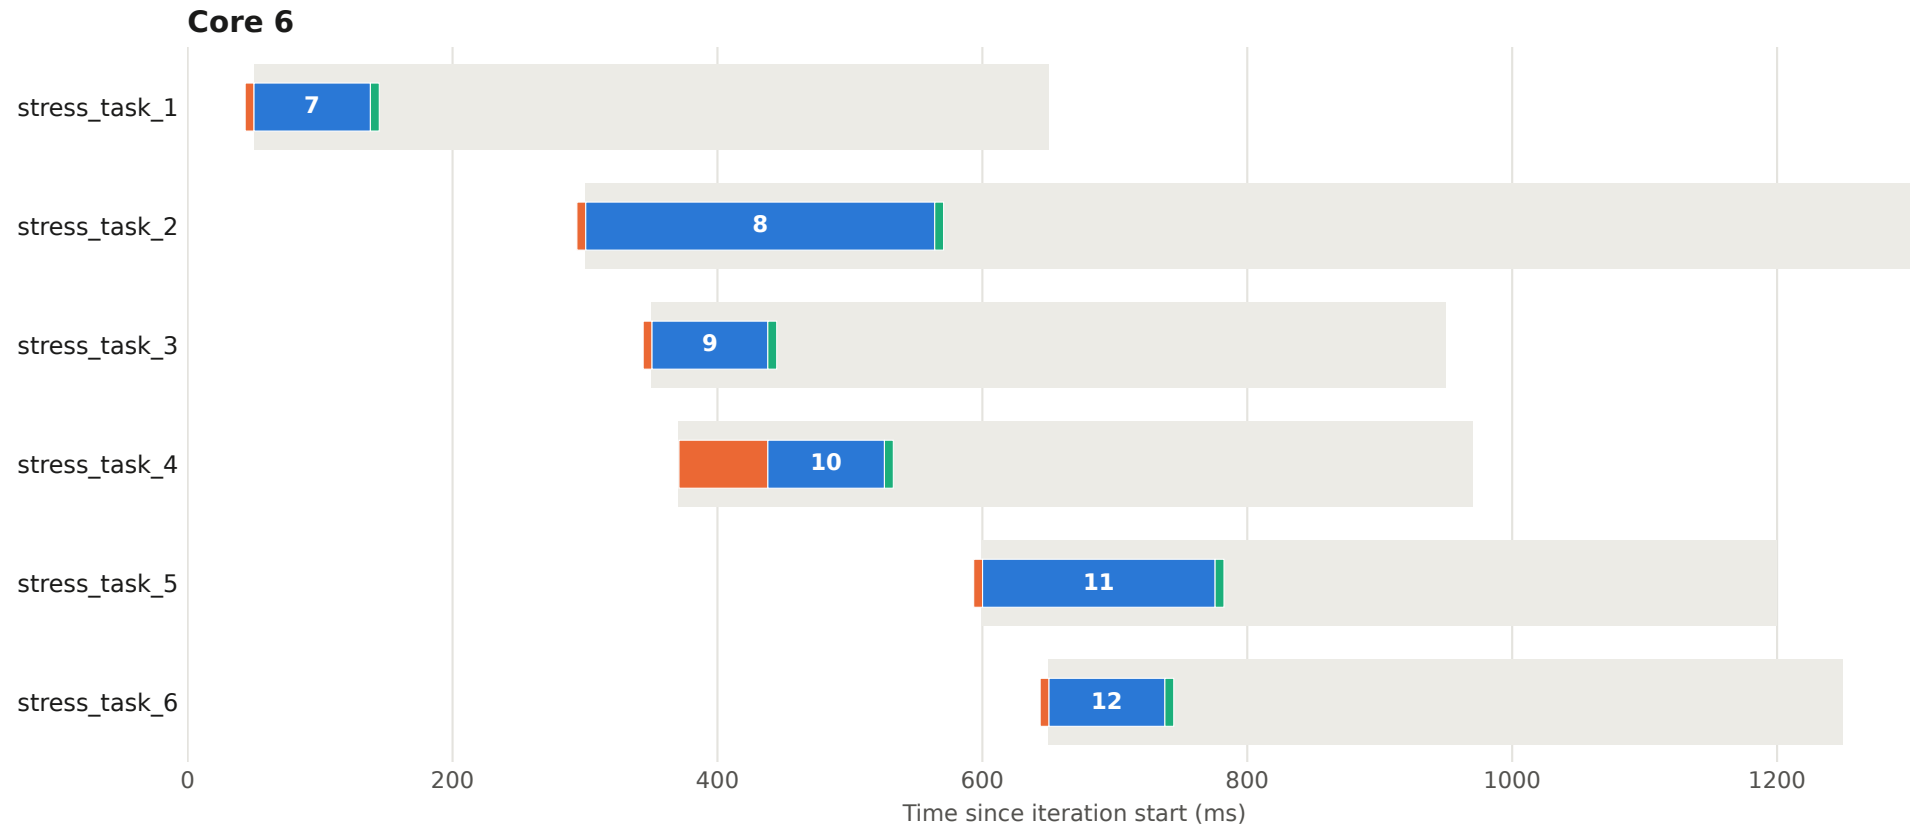


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 88 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

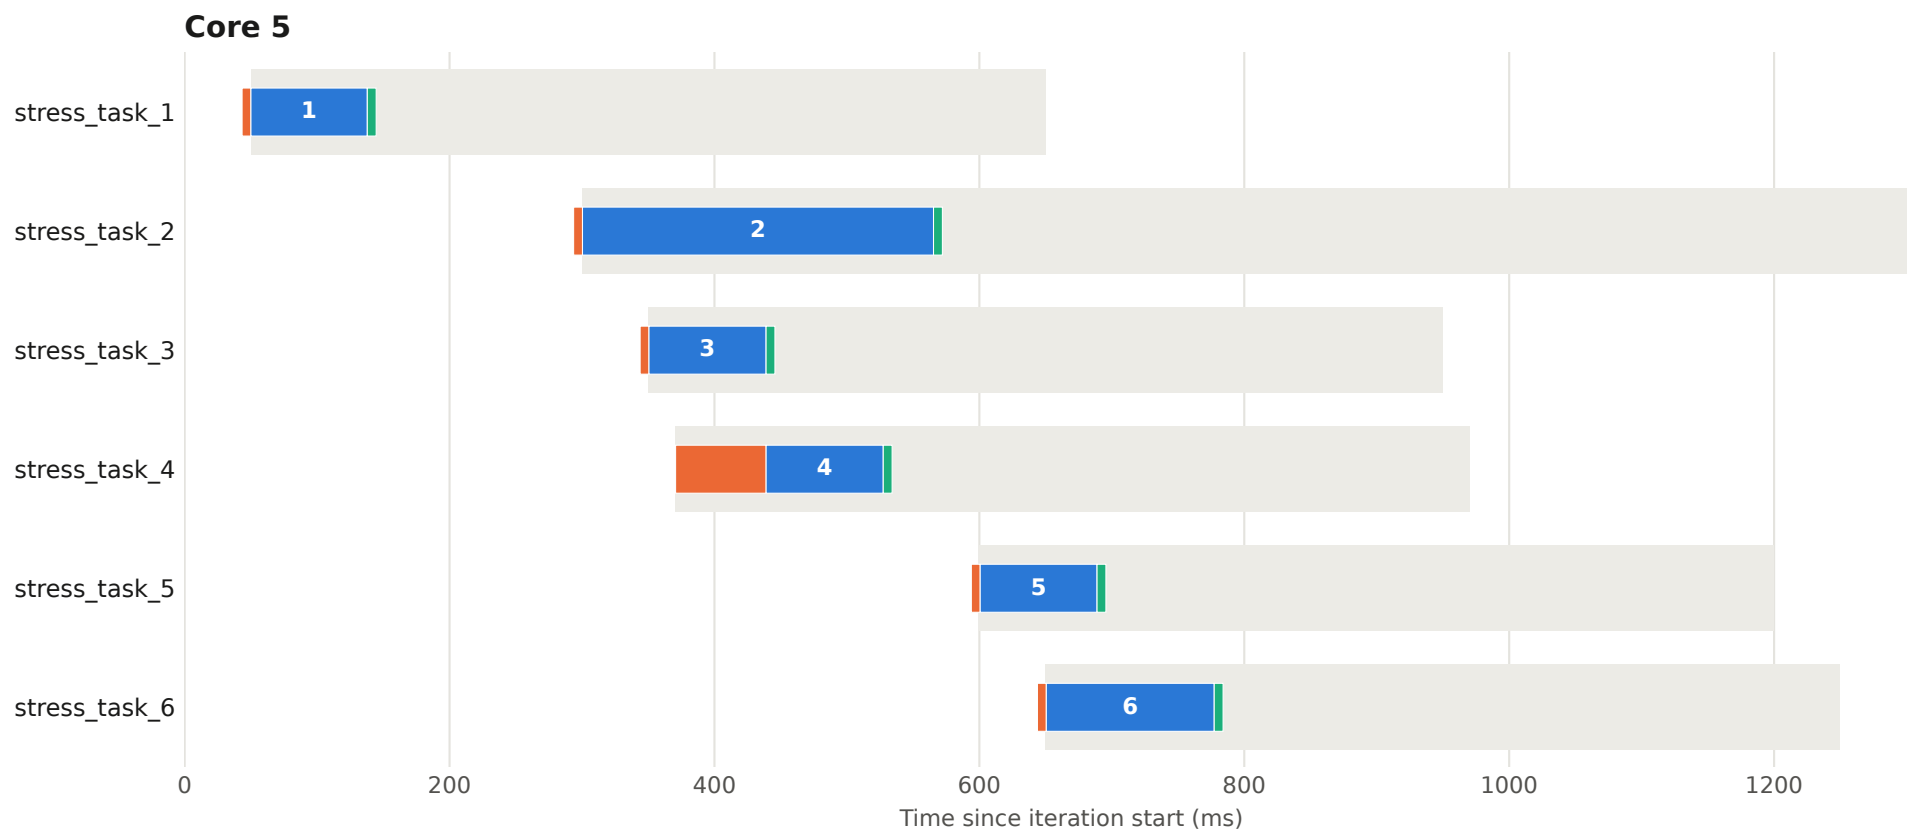


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 88 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

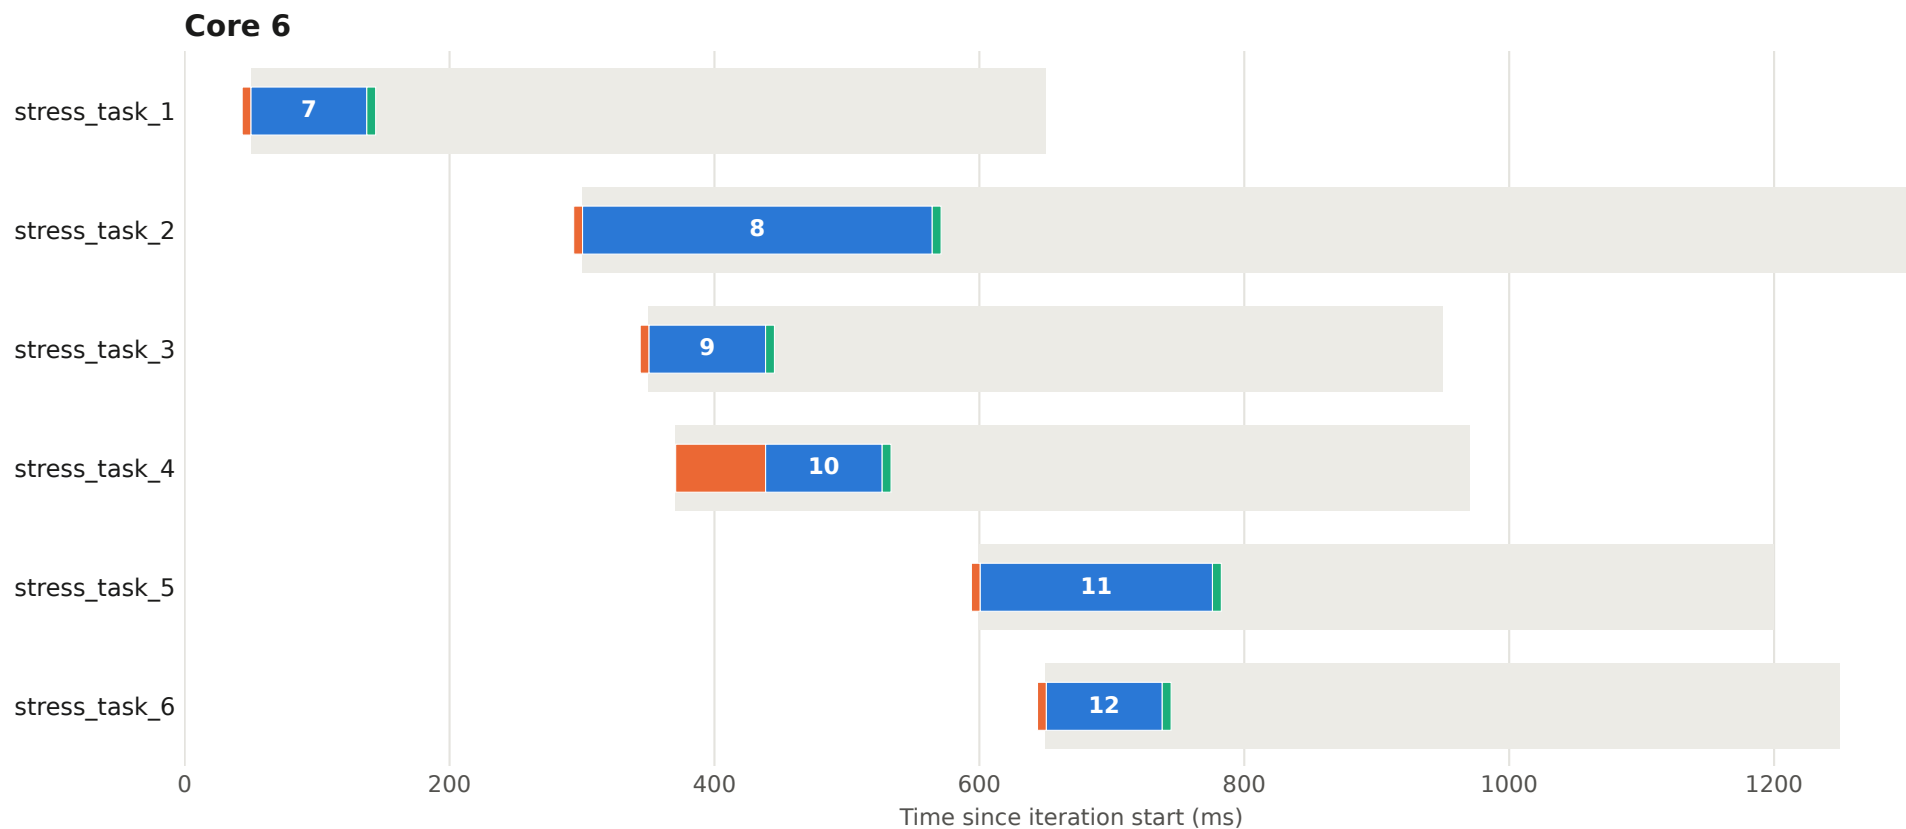


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 89 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

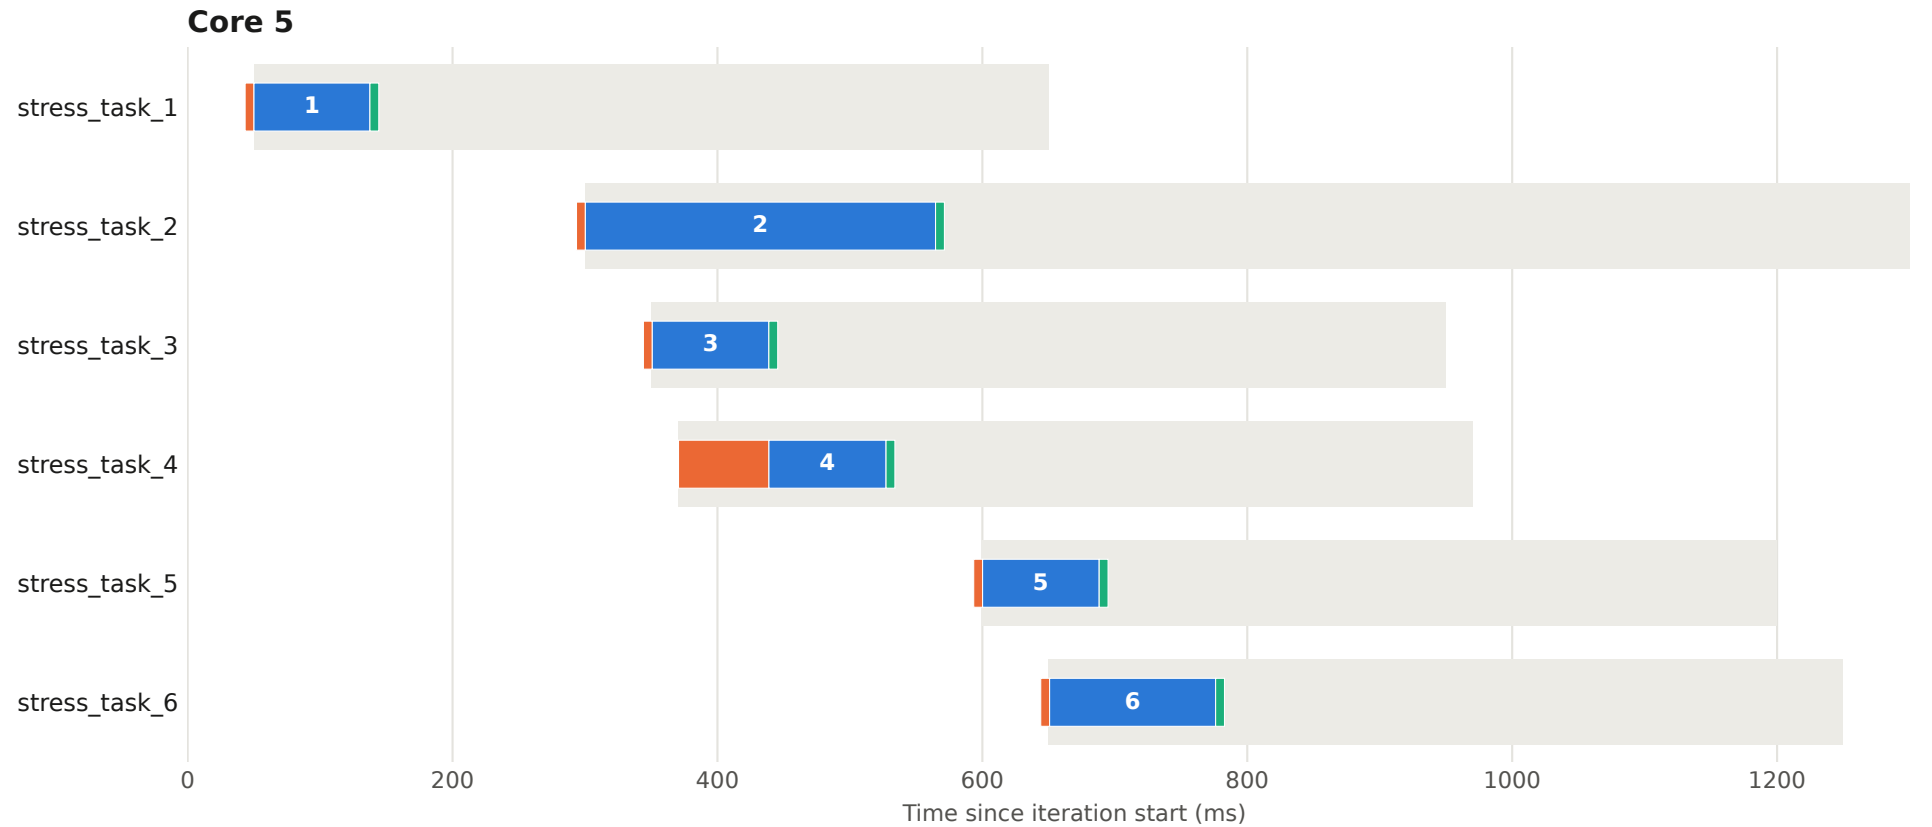


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 89 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

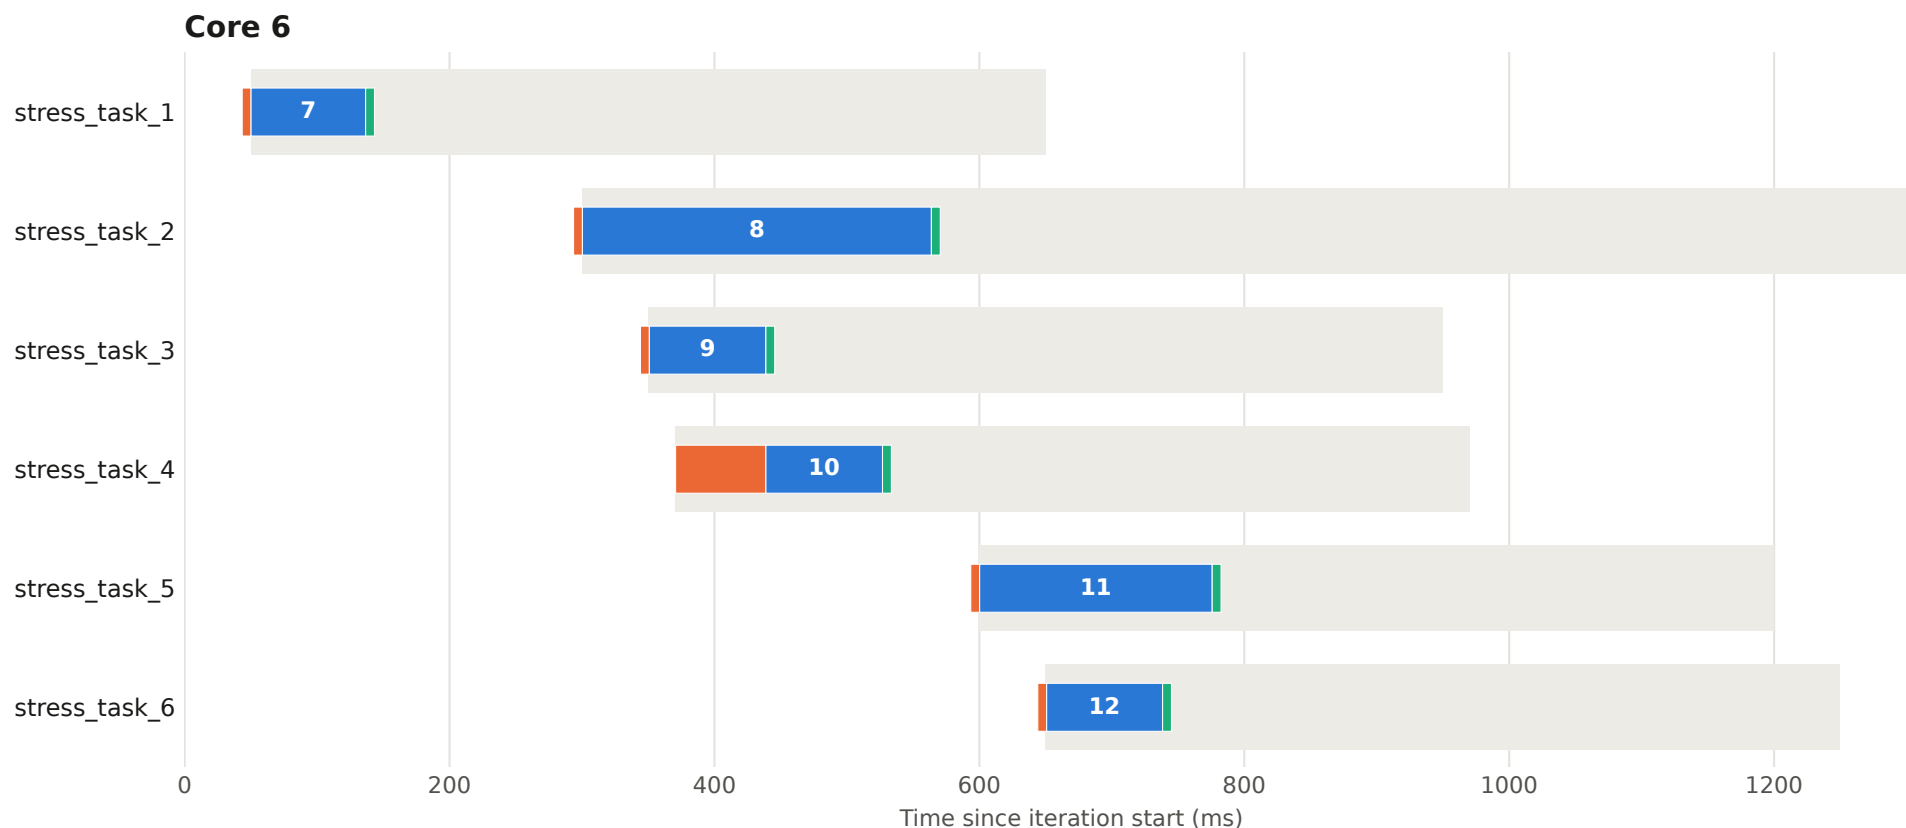


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 90 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

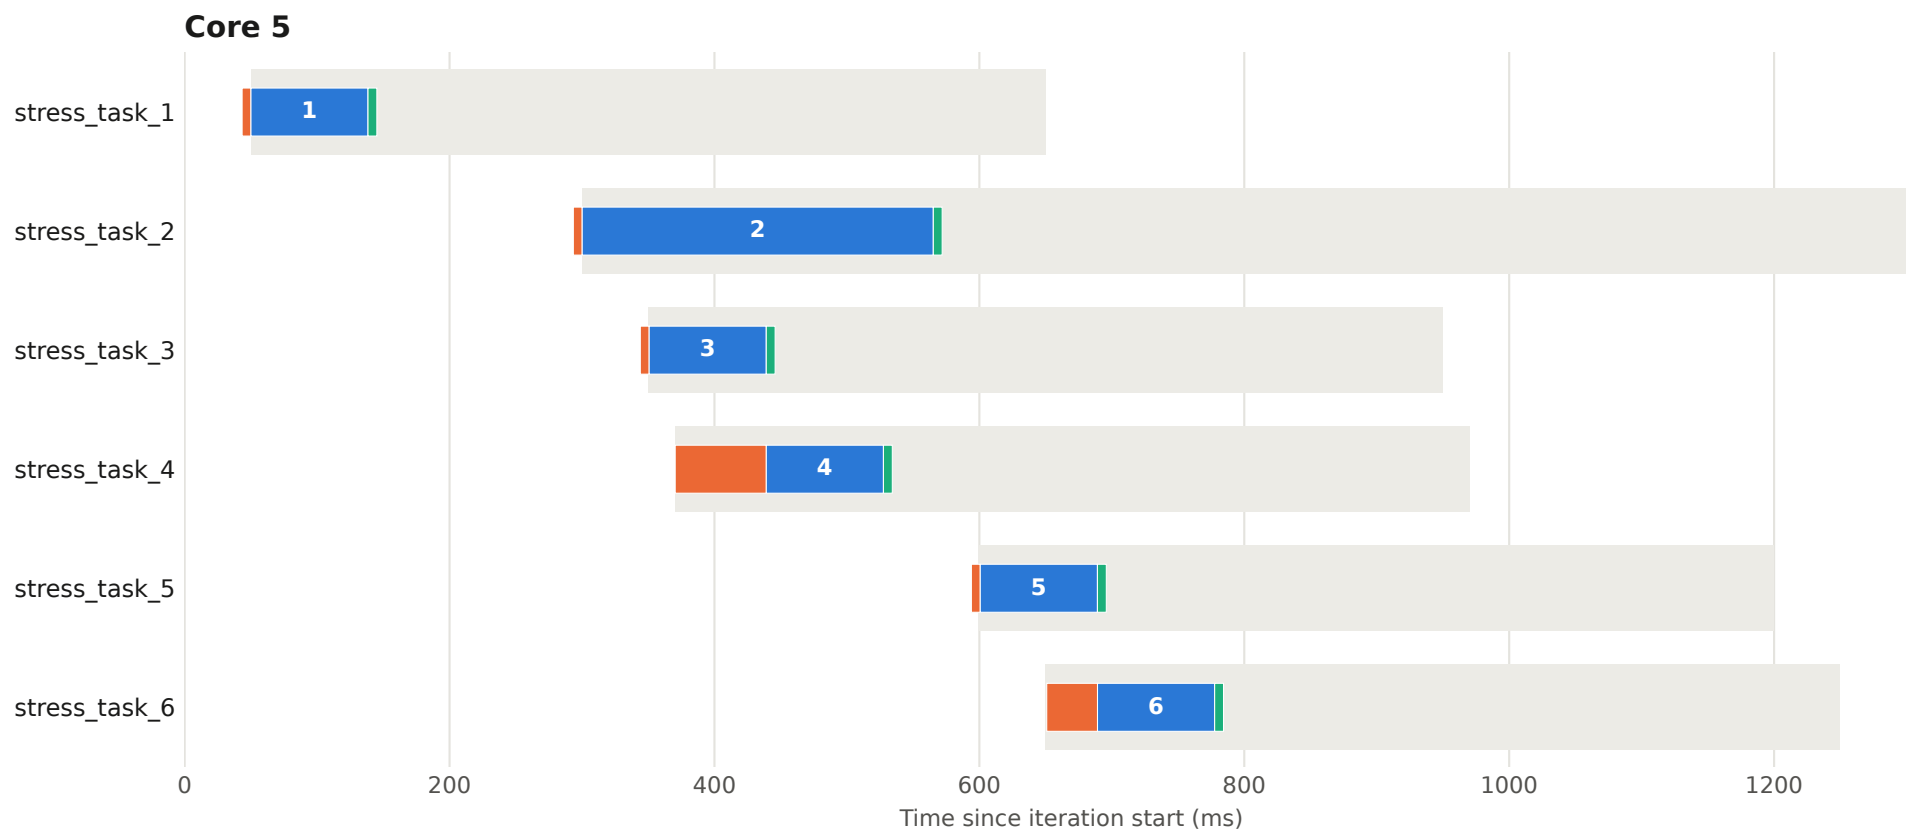


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 90 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

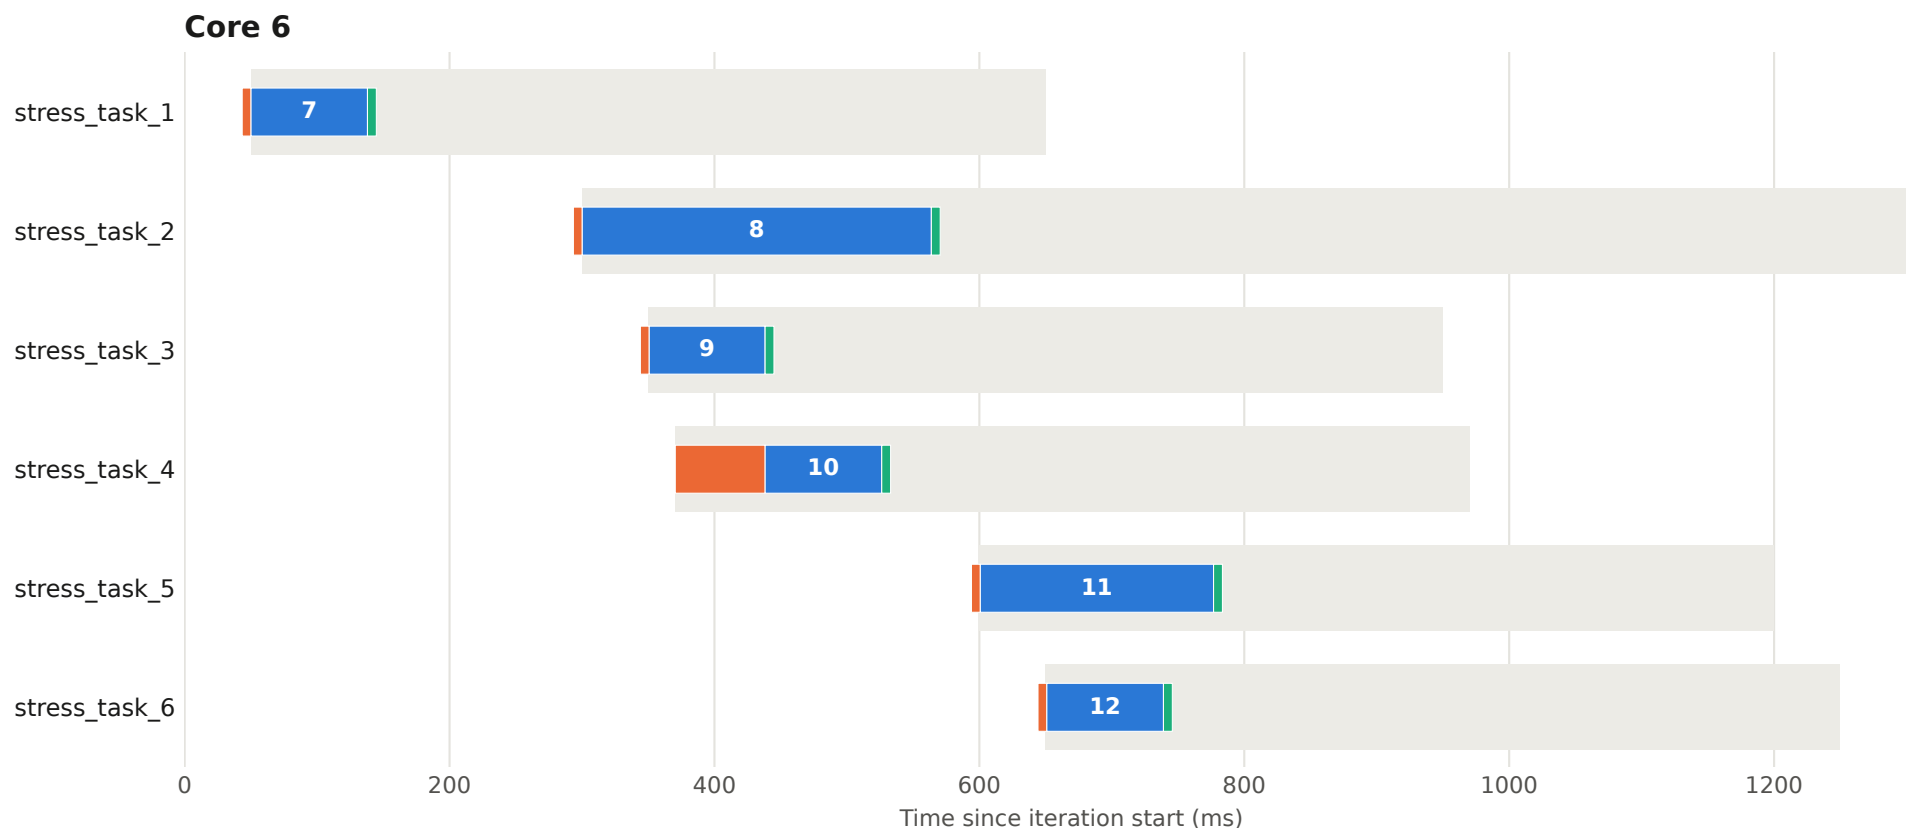


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 91 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

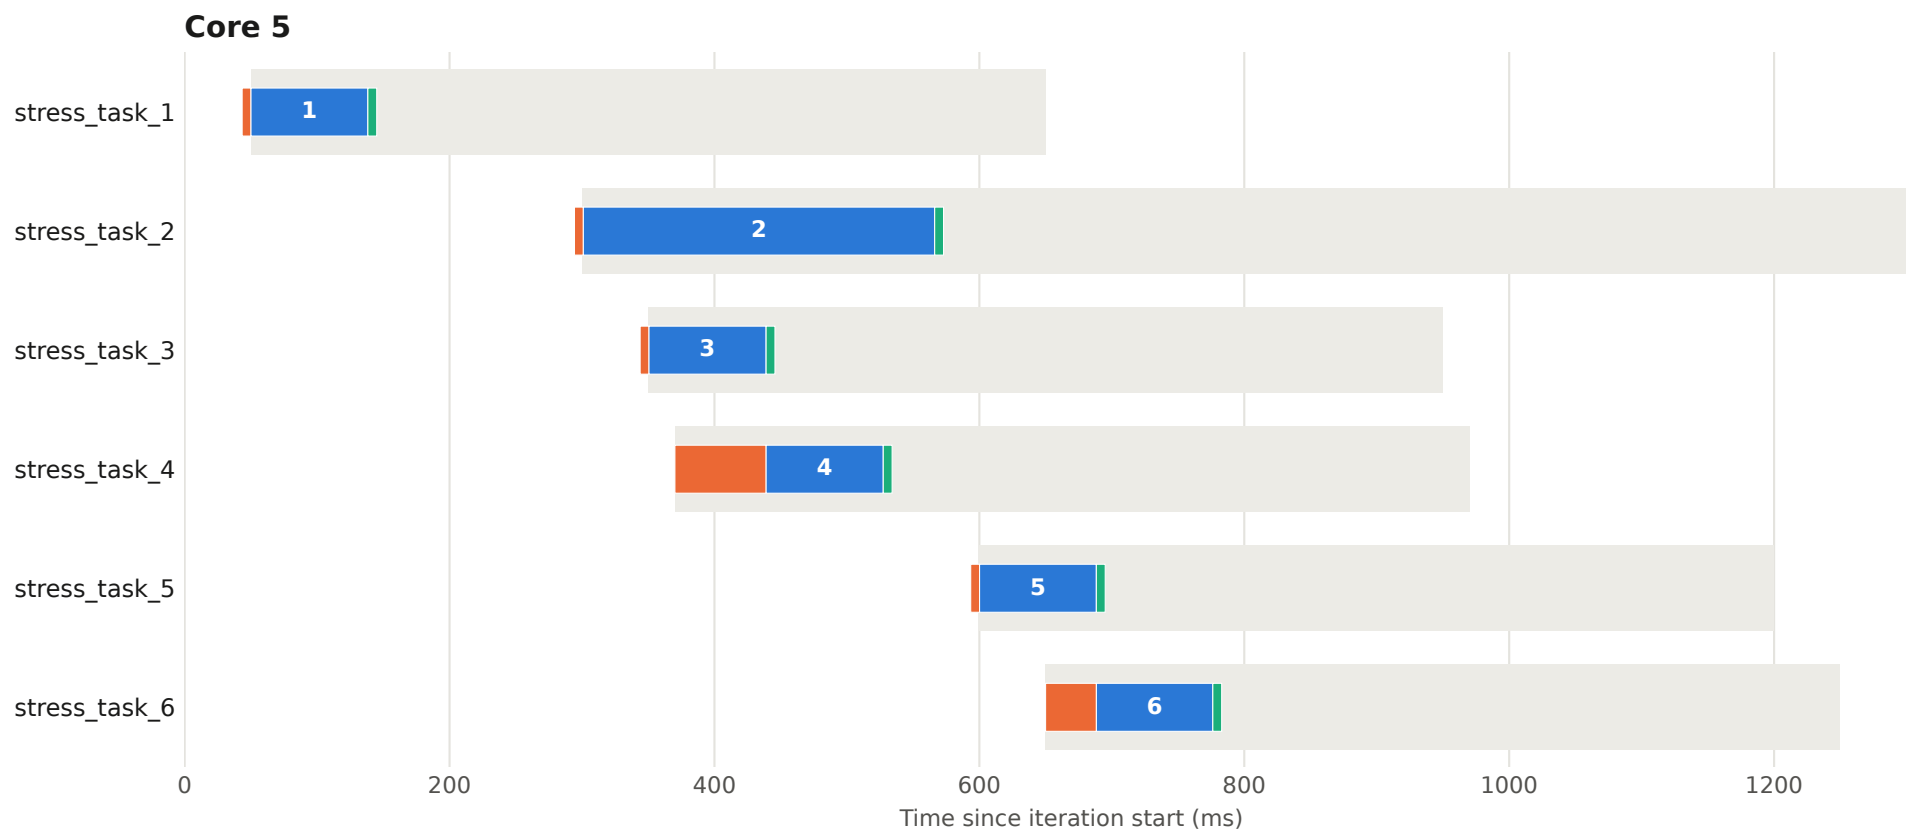


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 91 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

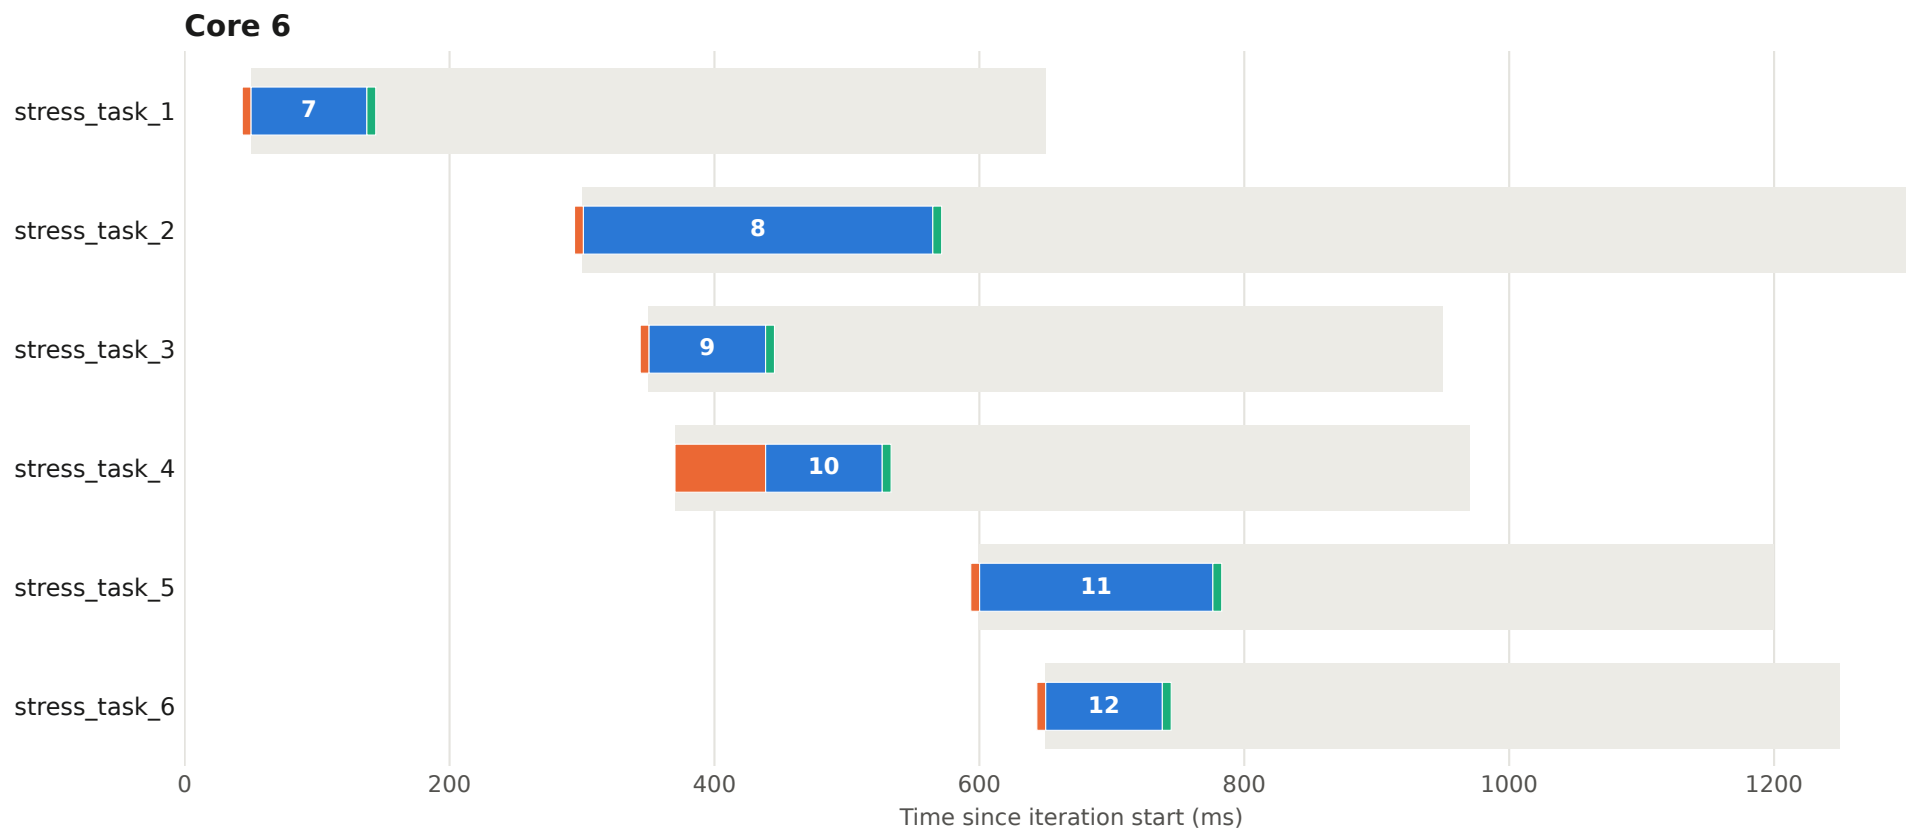


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 92 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

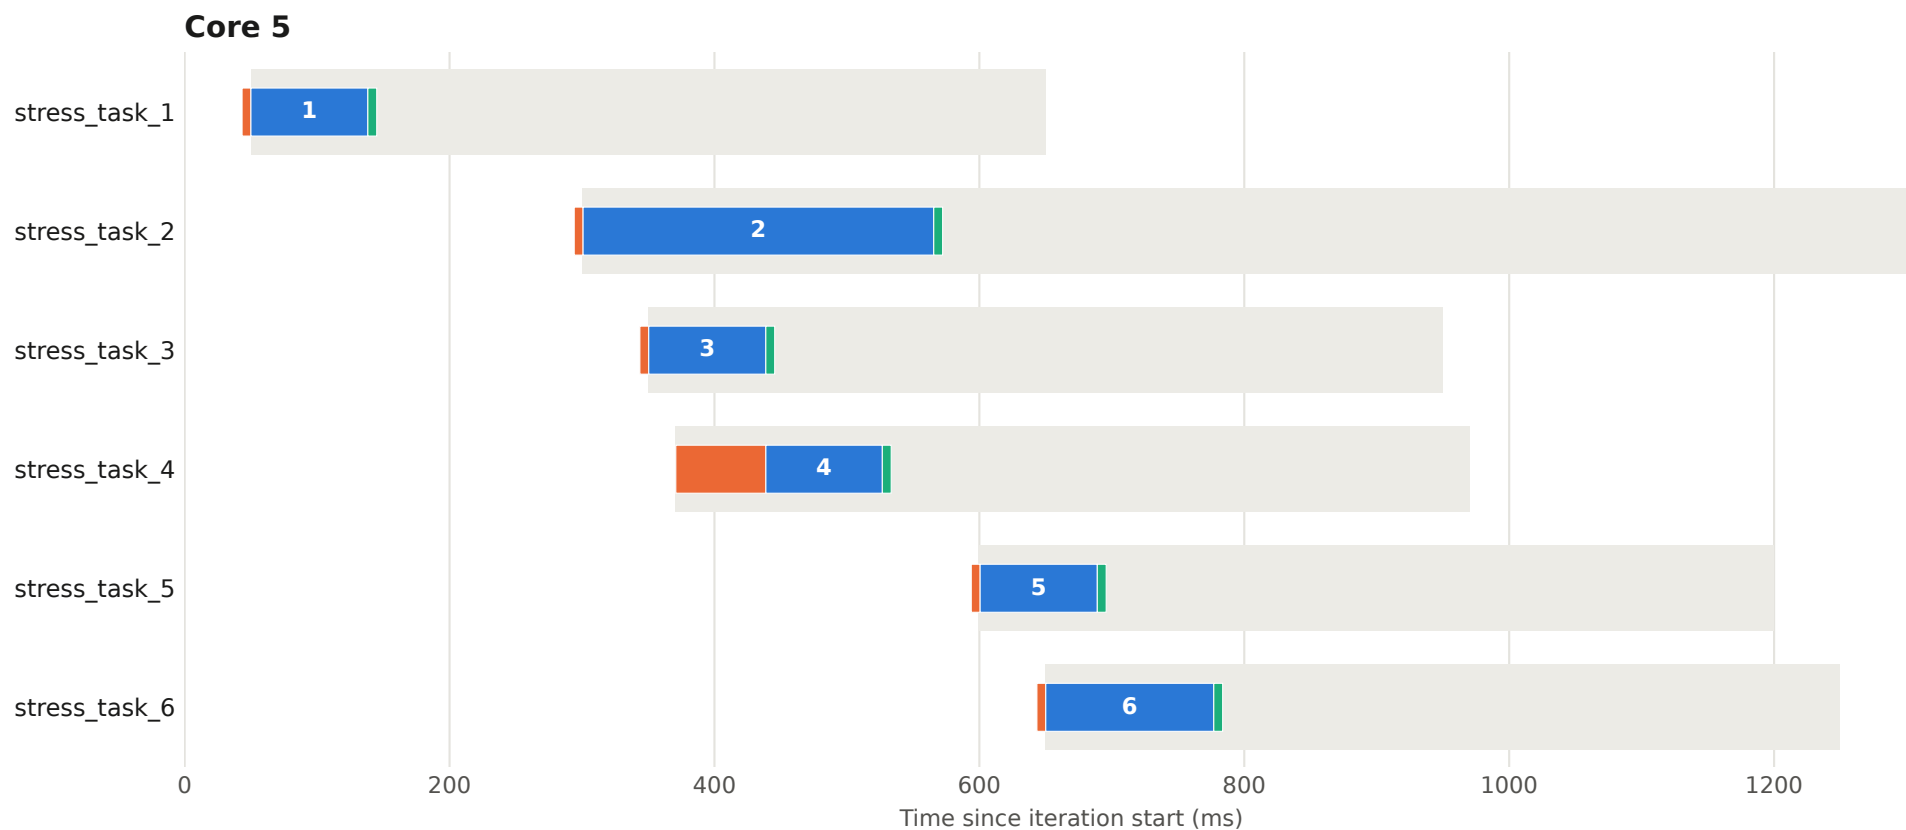


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 92 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

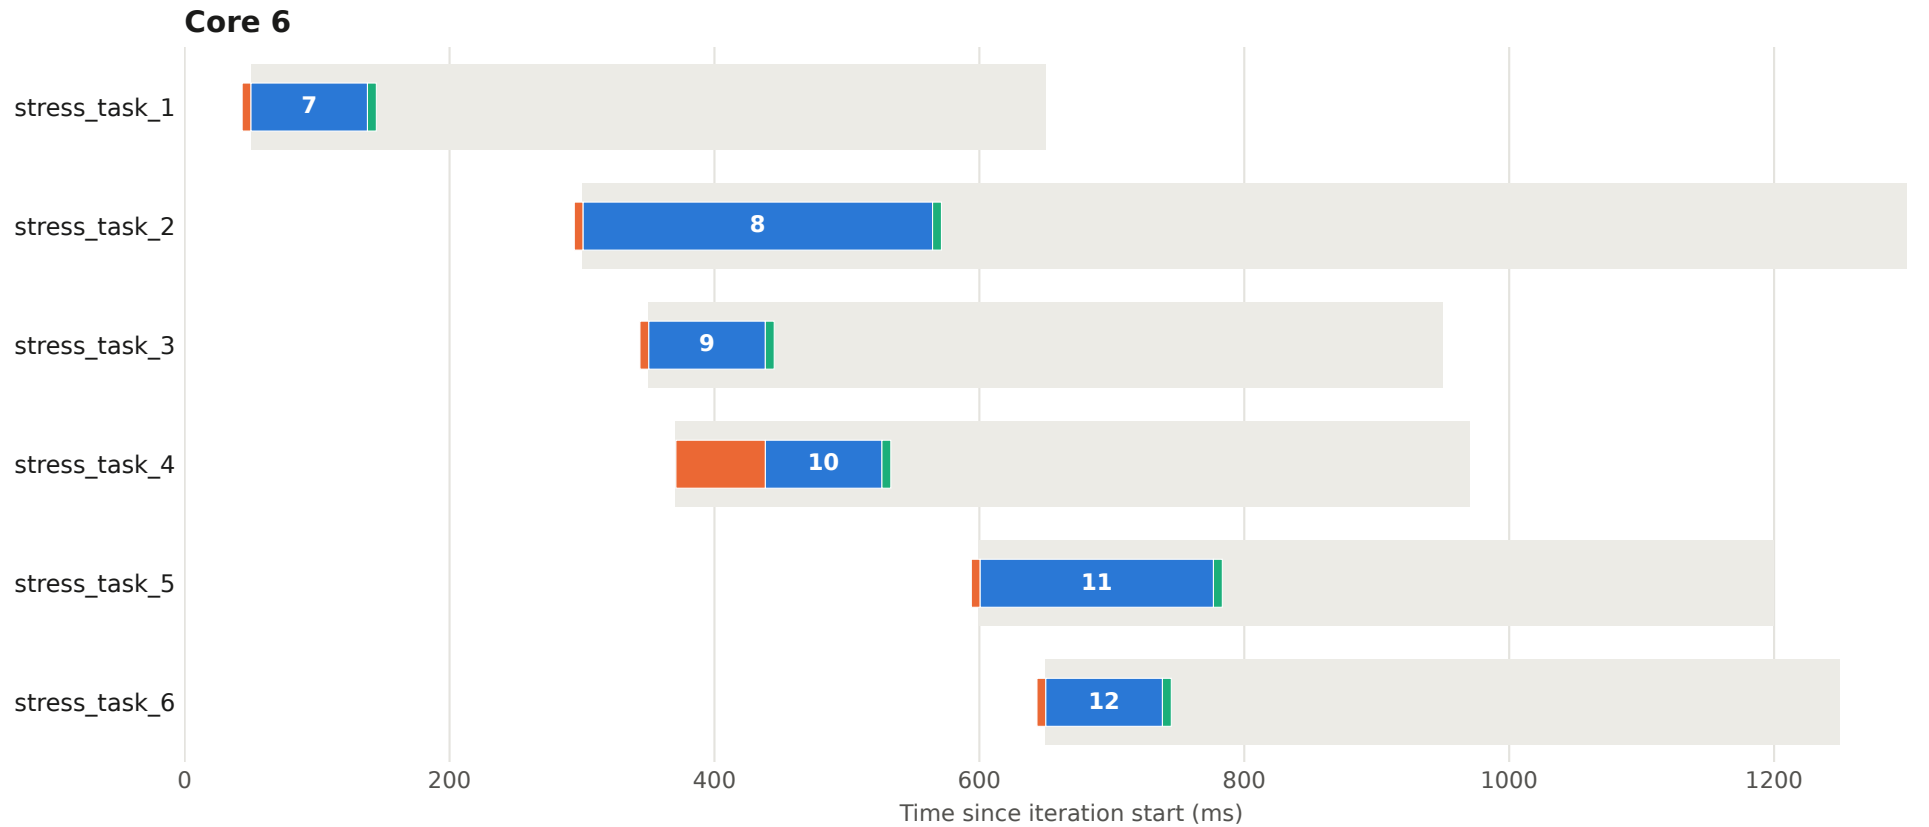


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 93 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

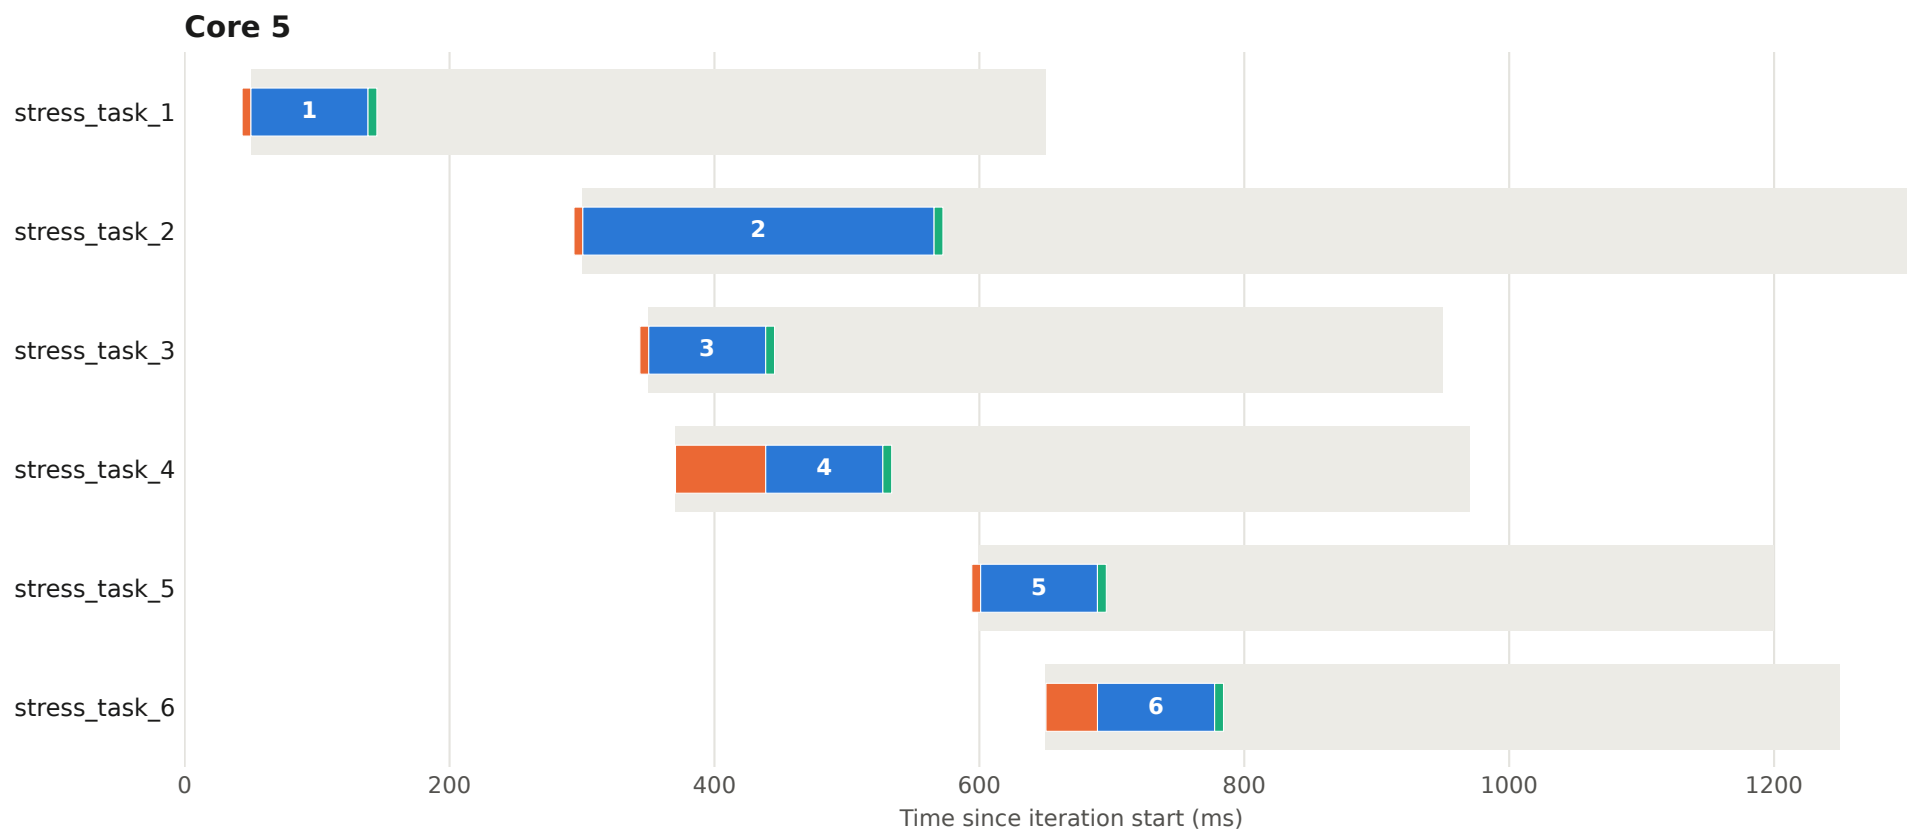


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 93 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

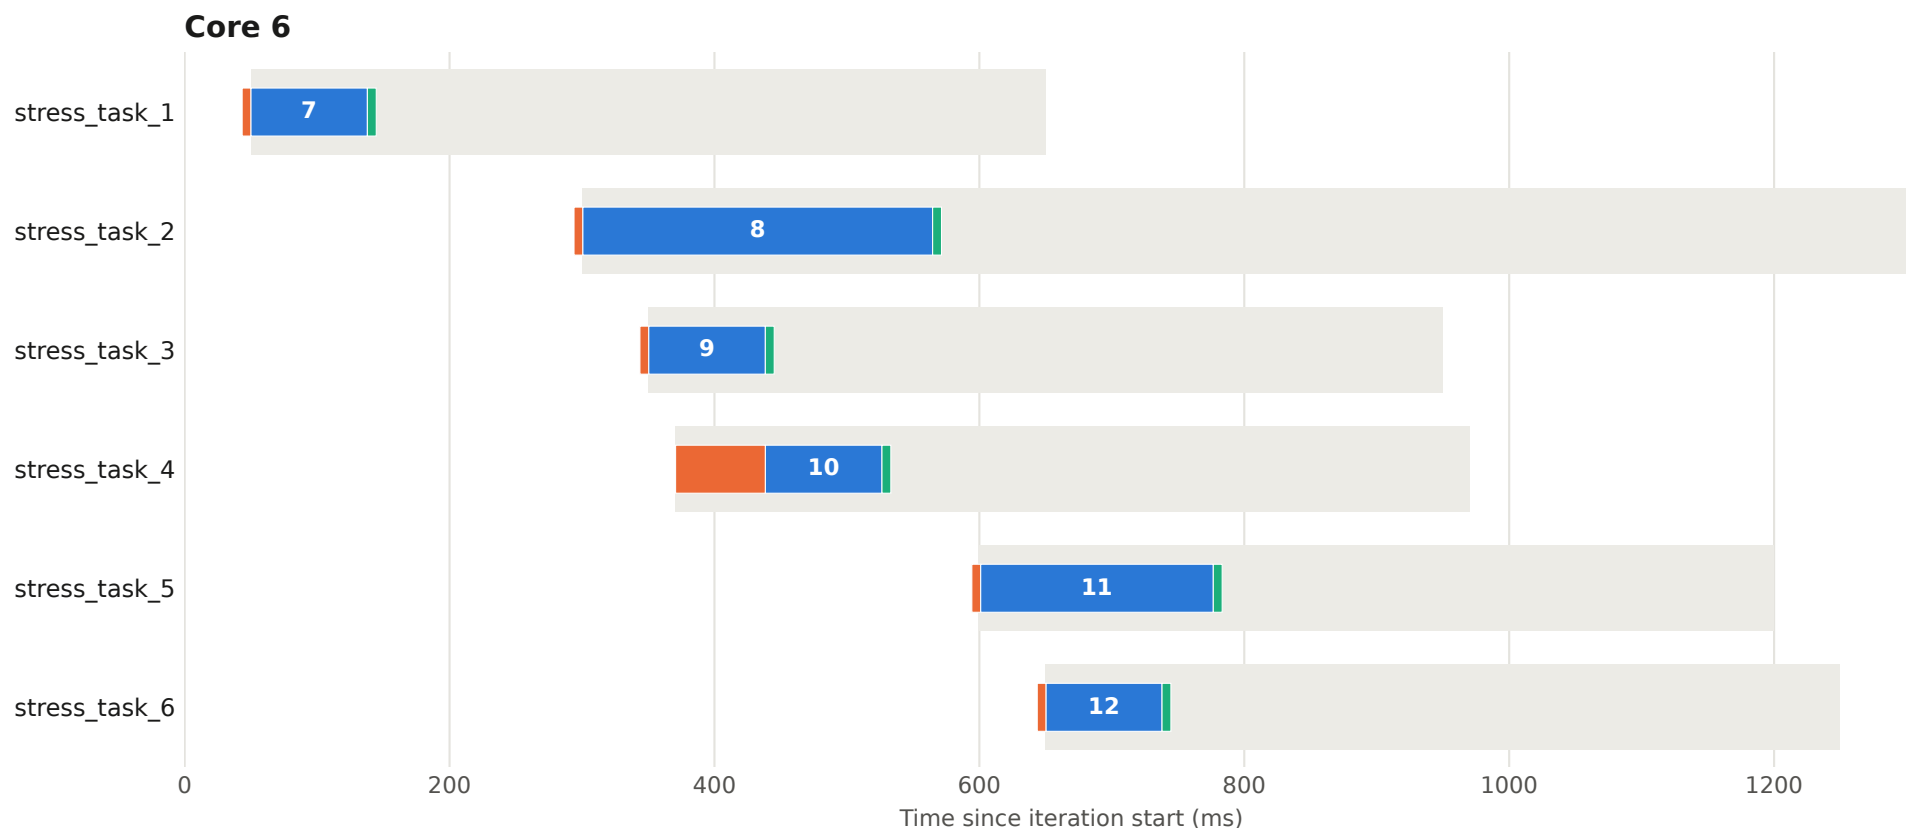


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 94 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

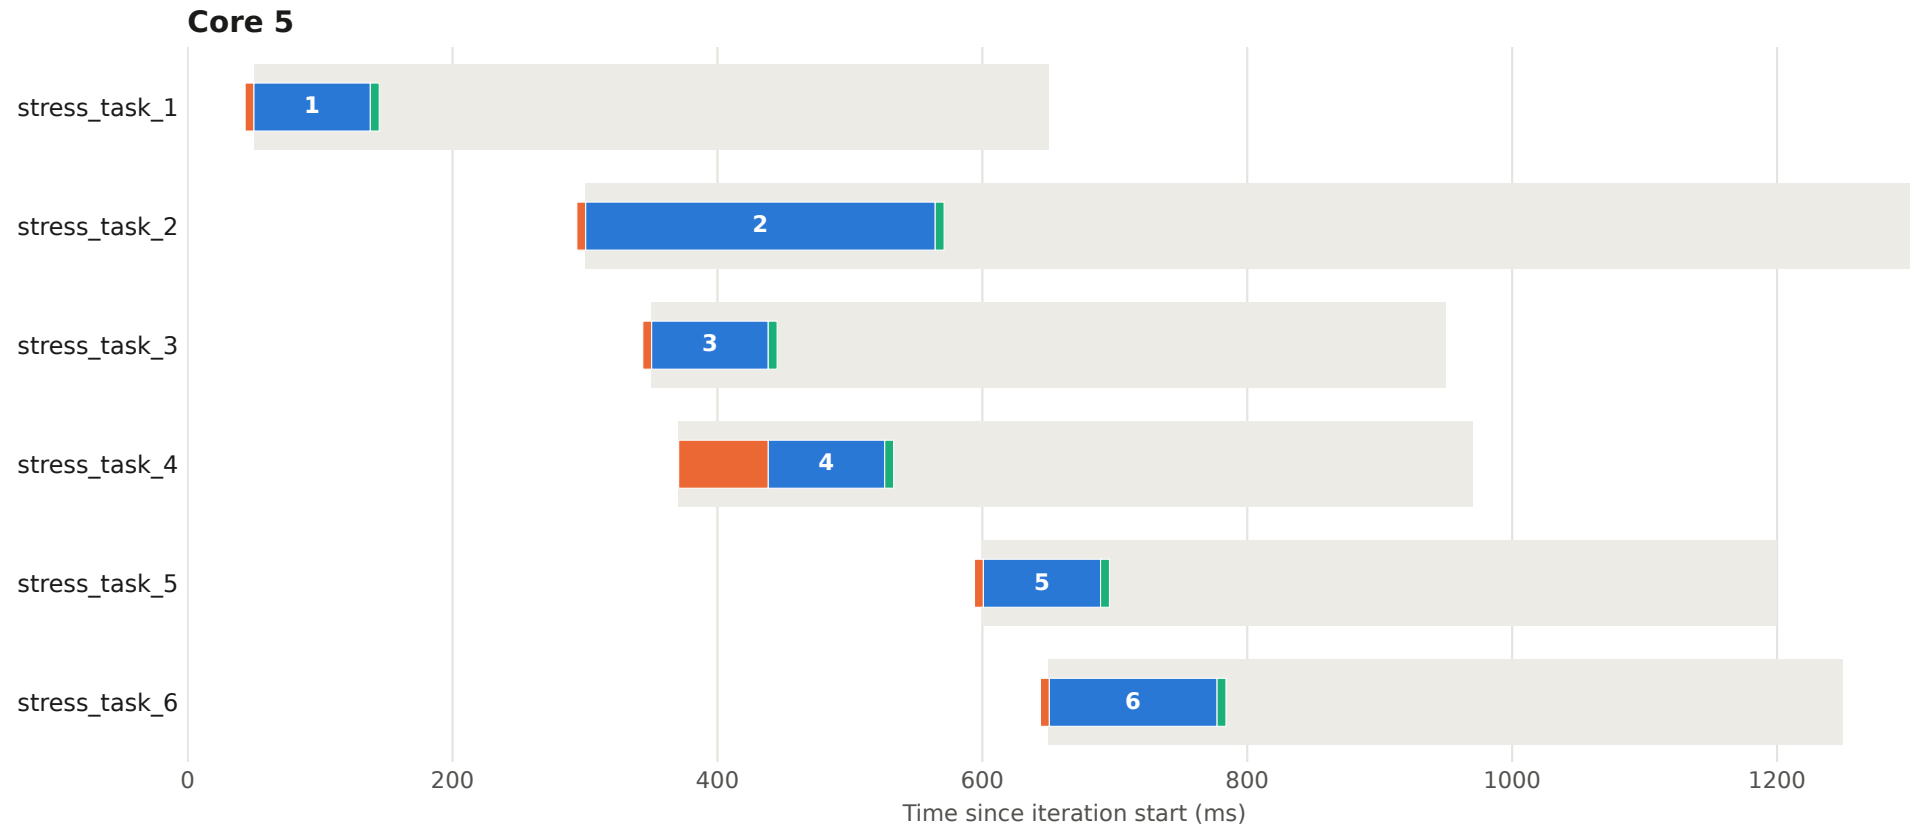


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 94 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

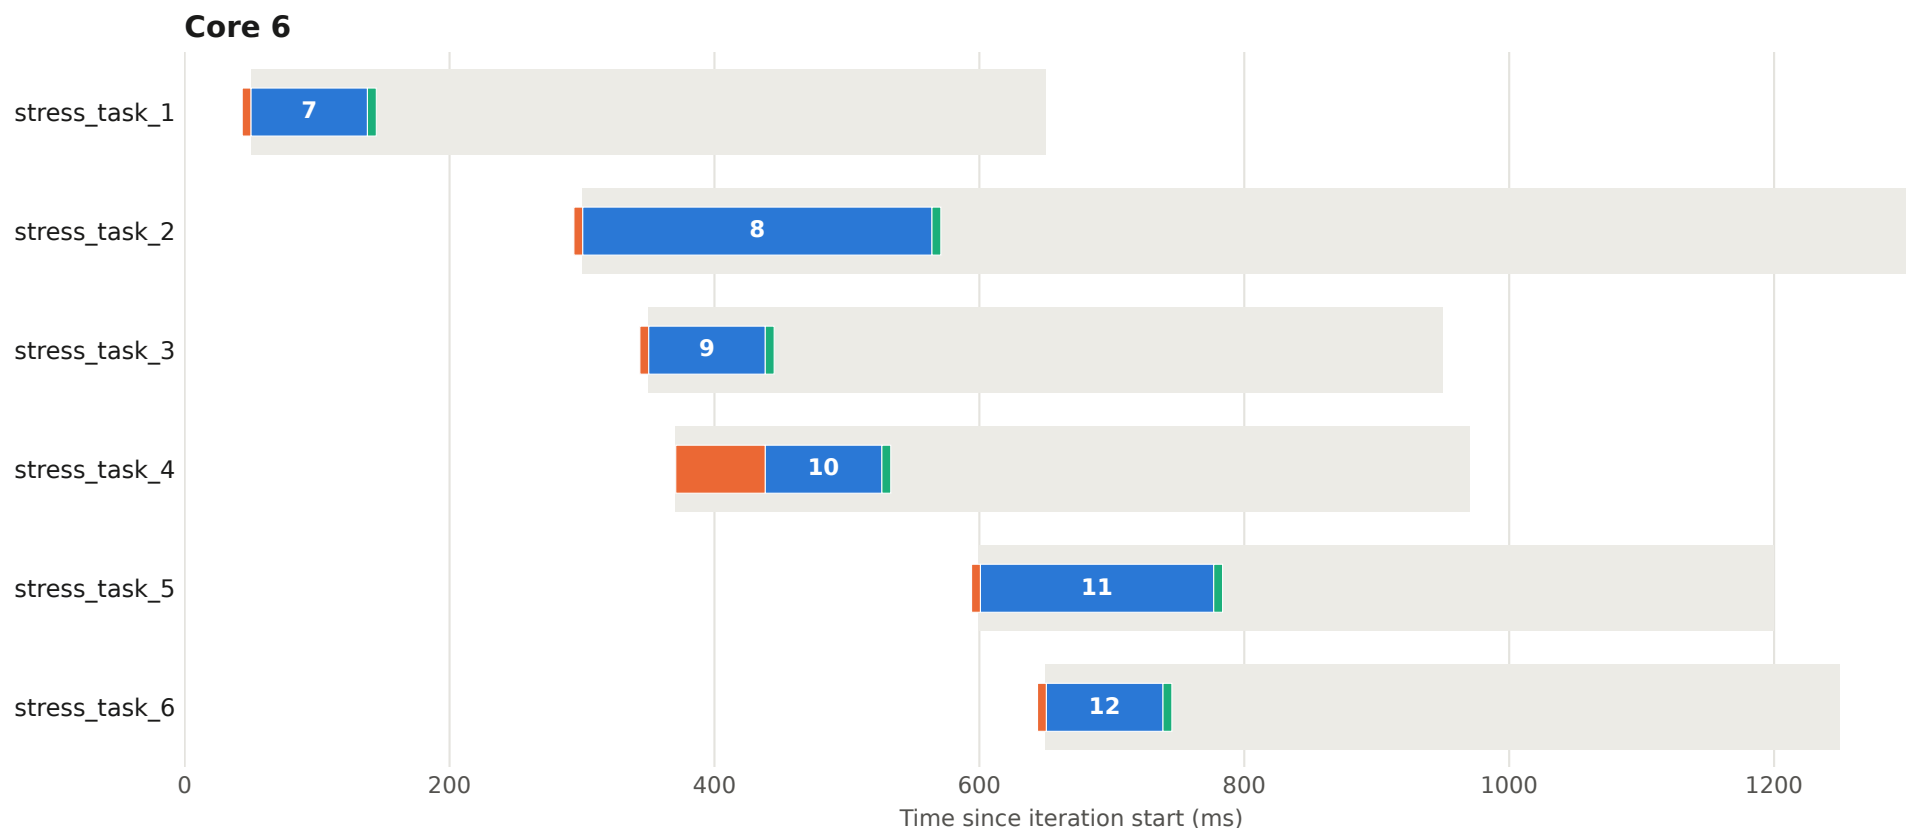


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 95 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

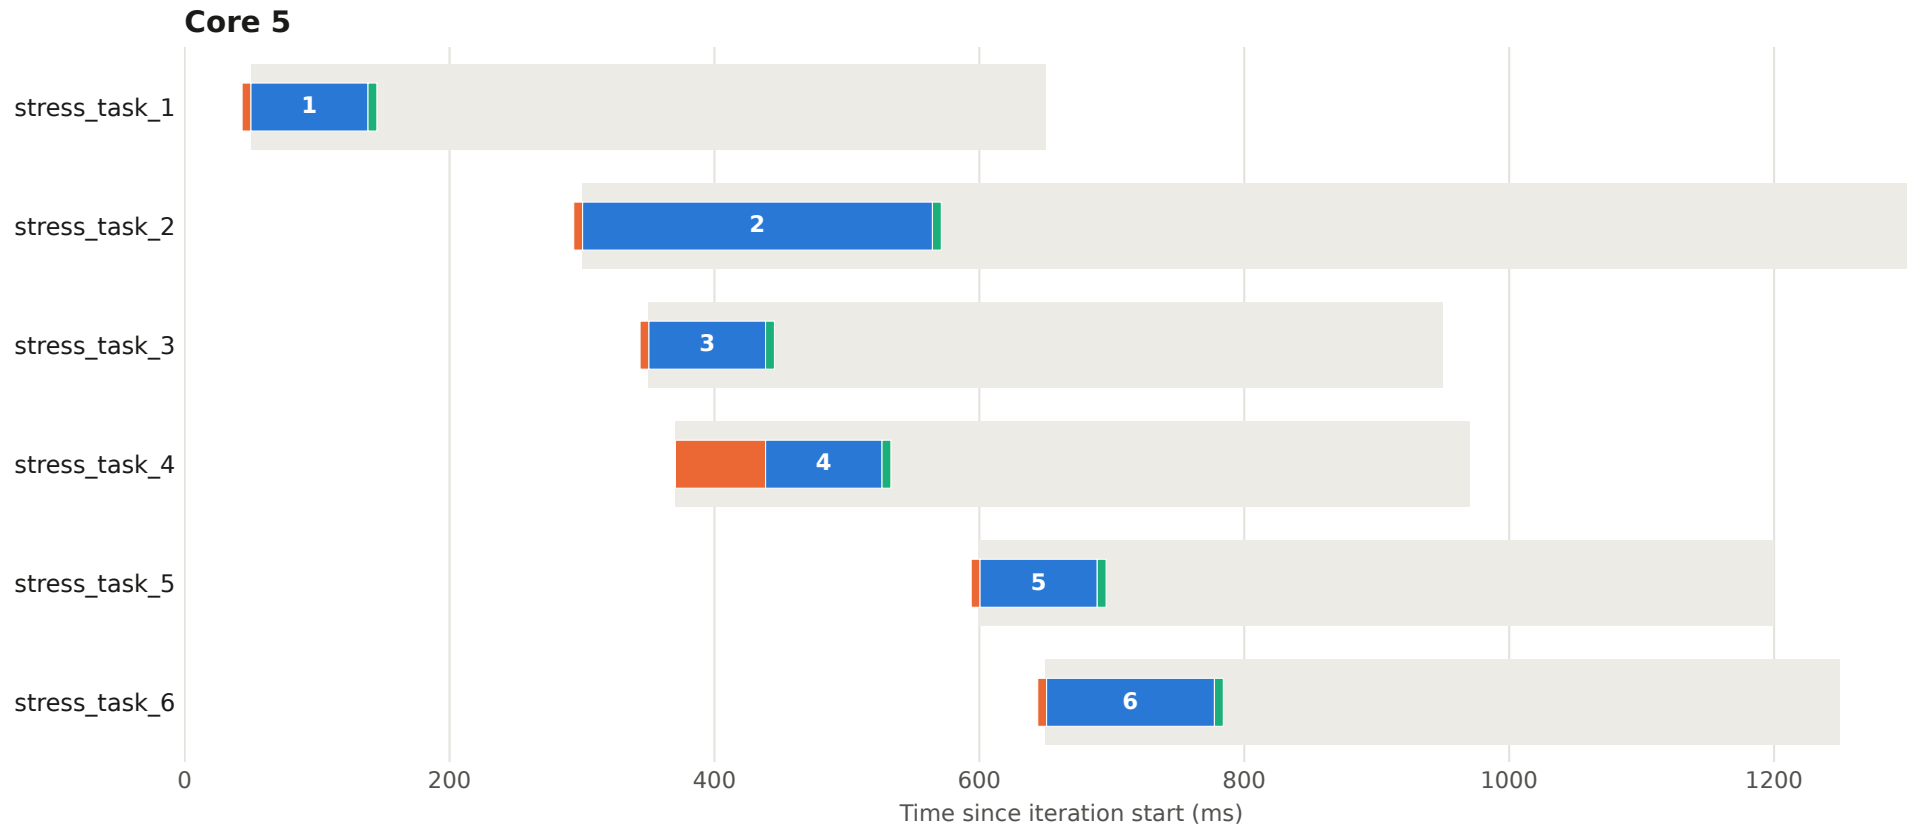


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 95 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

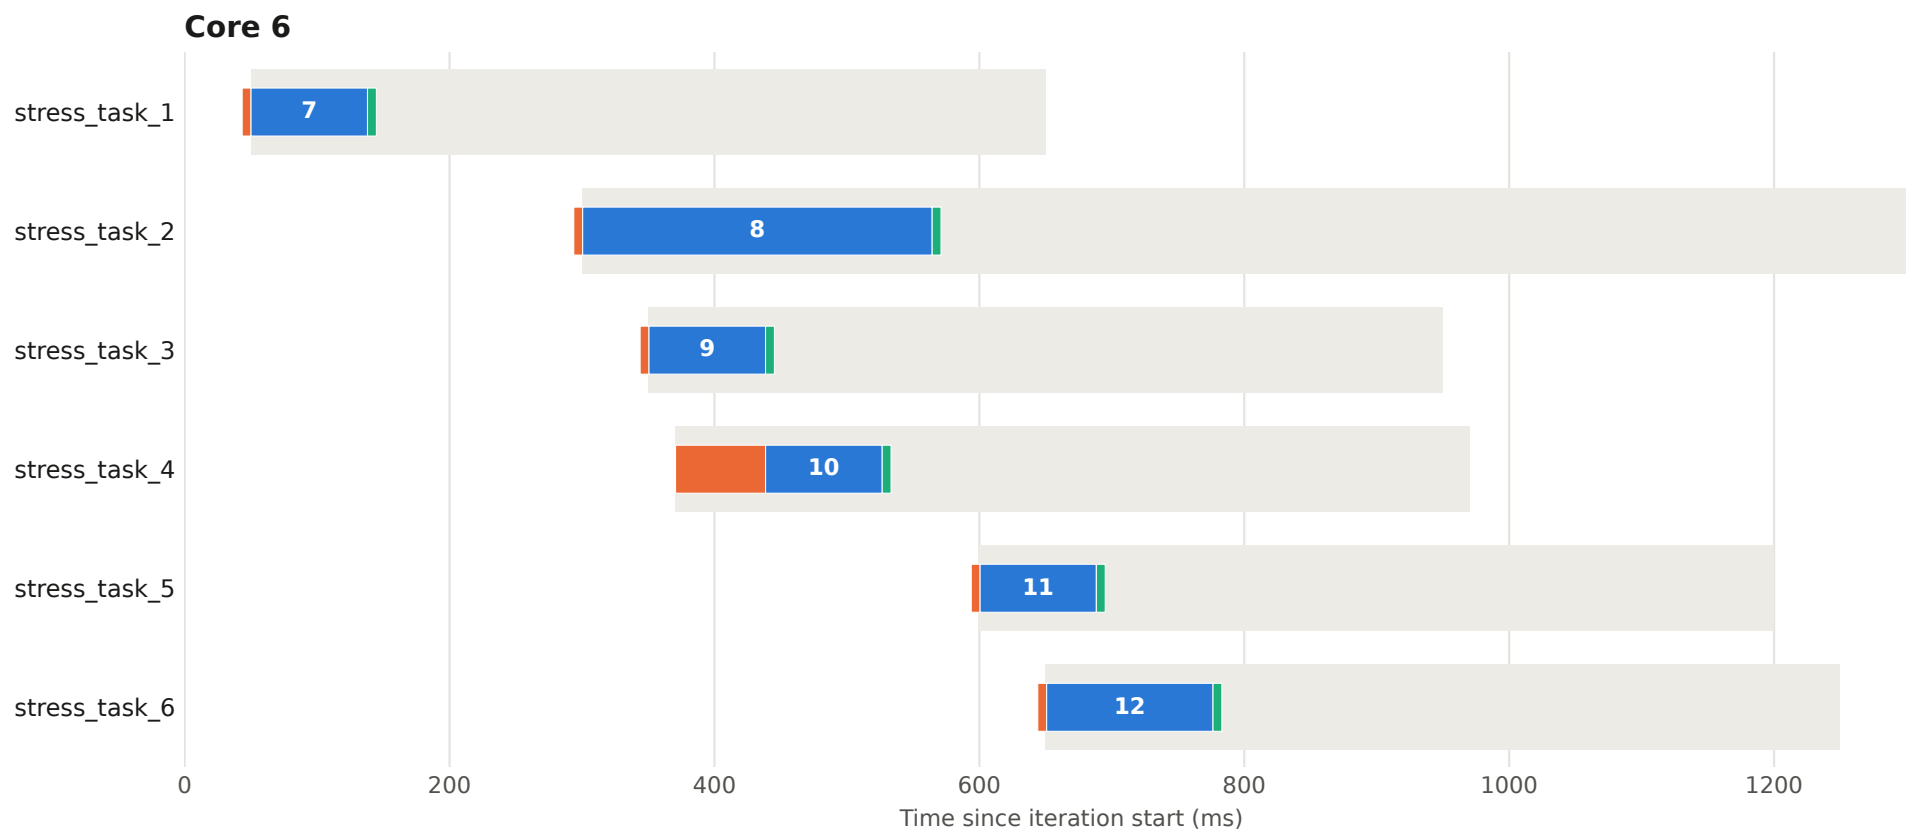


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 96 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

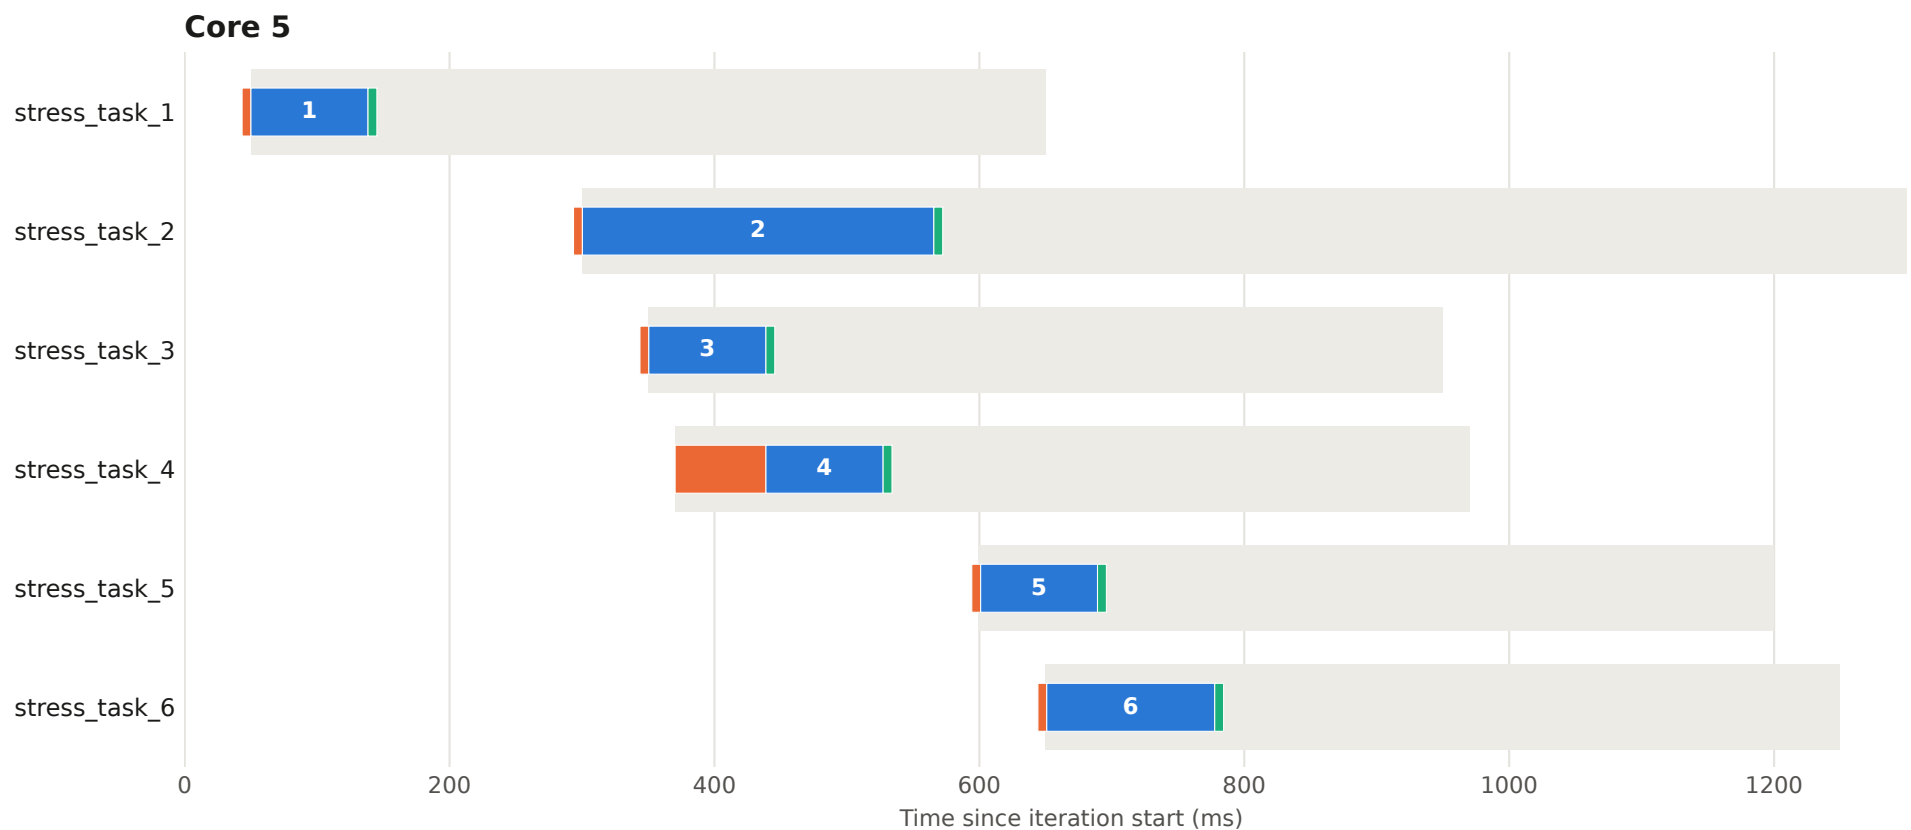


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 96 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

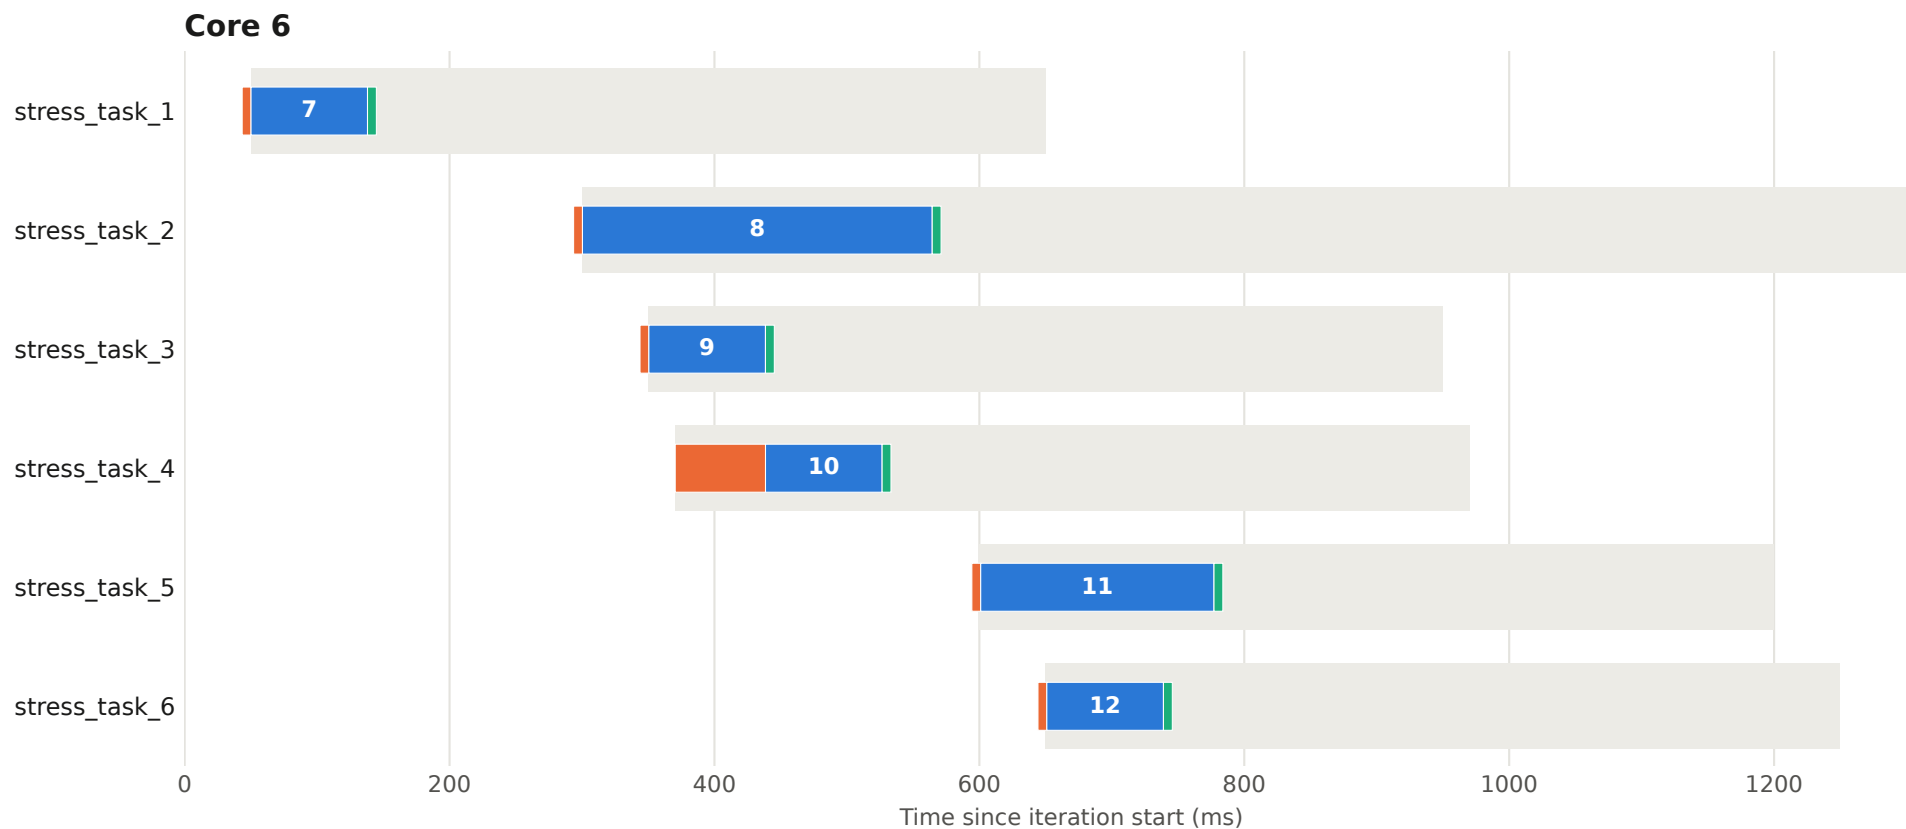


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 97 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

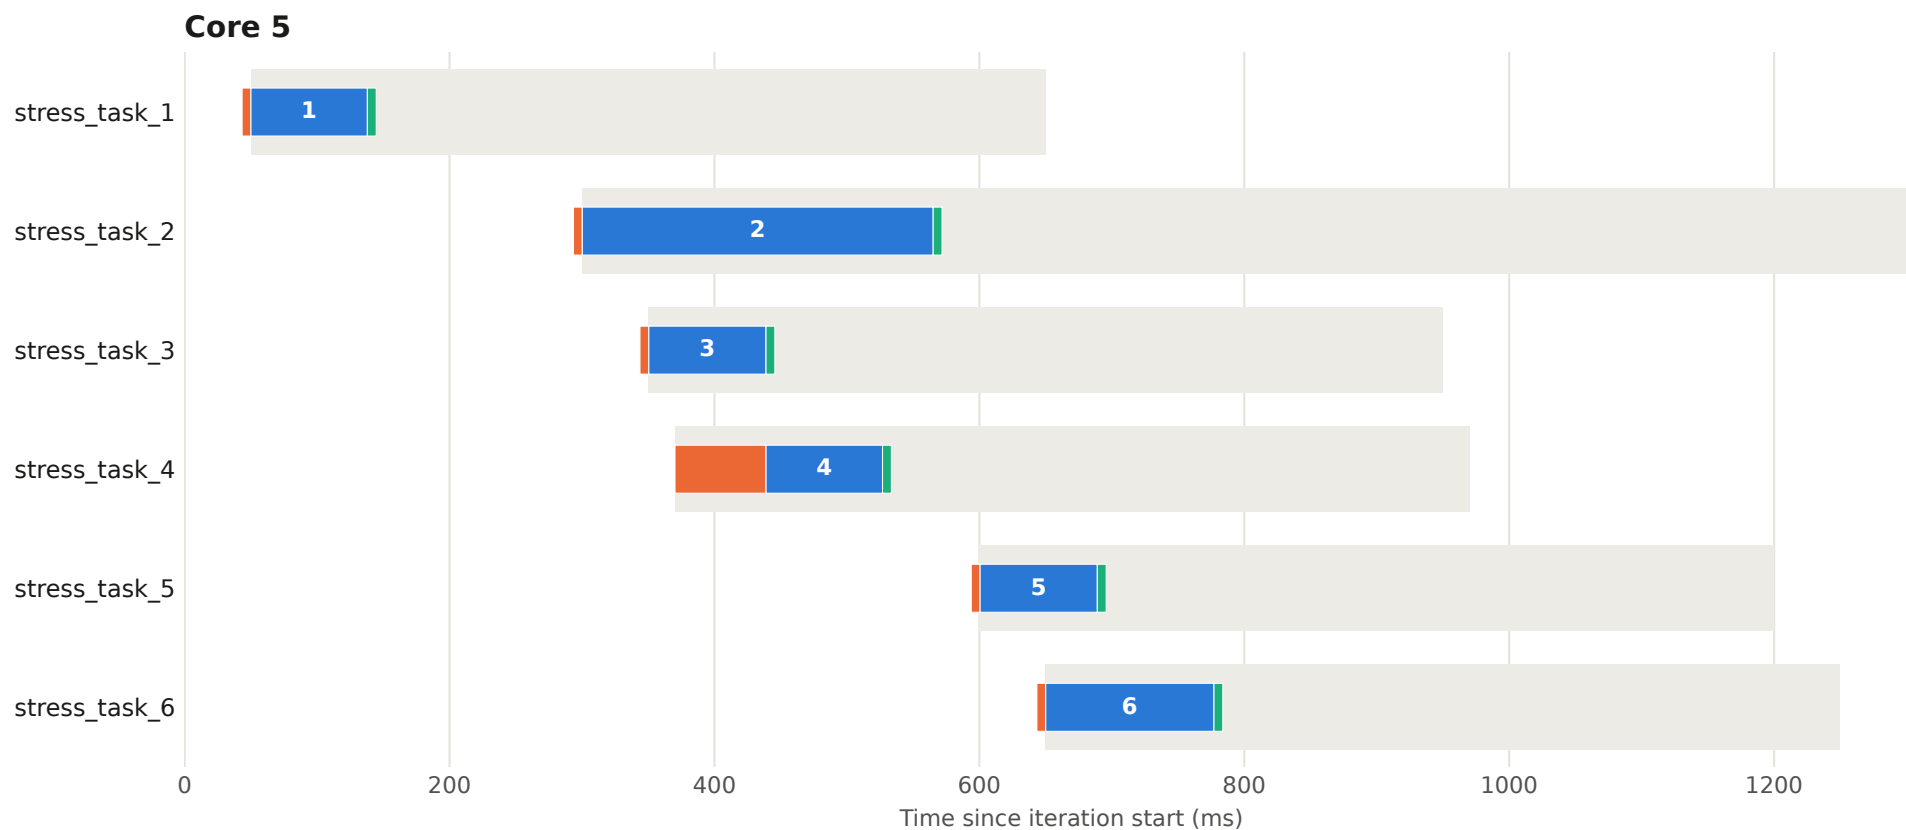


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 97 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

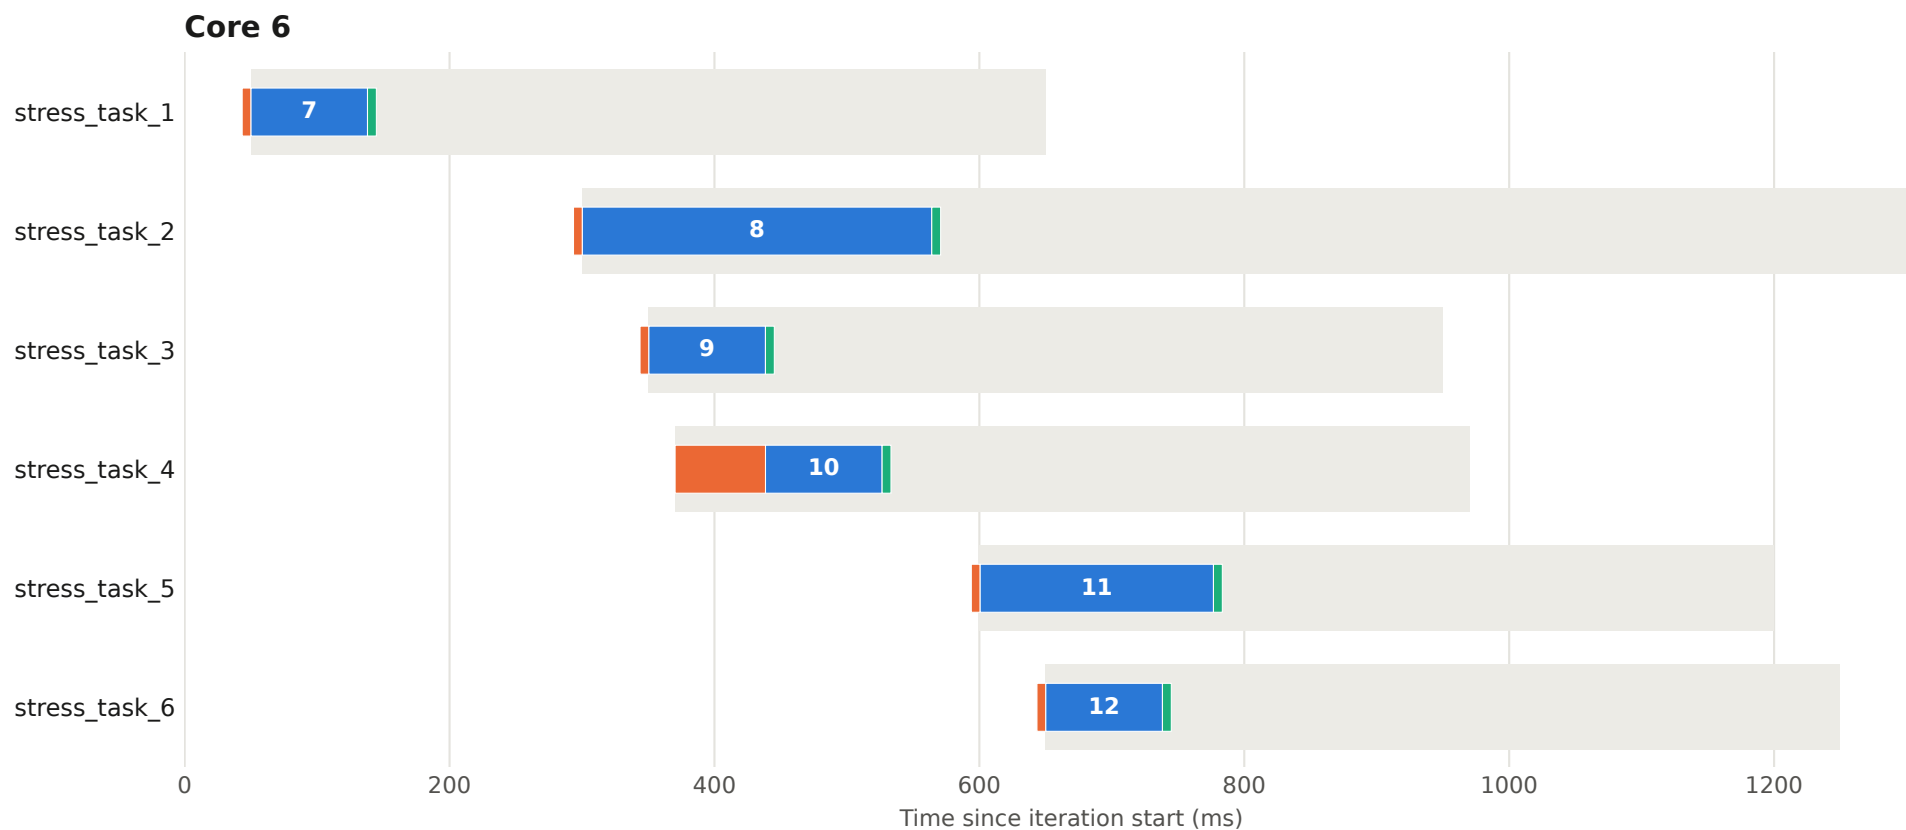


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 98 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

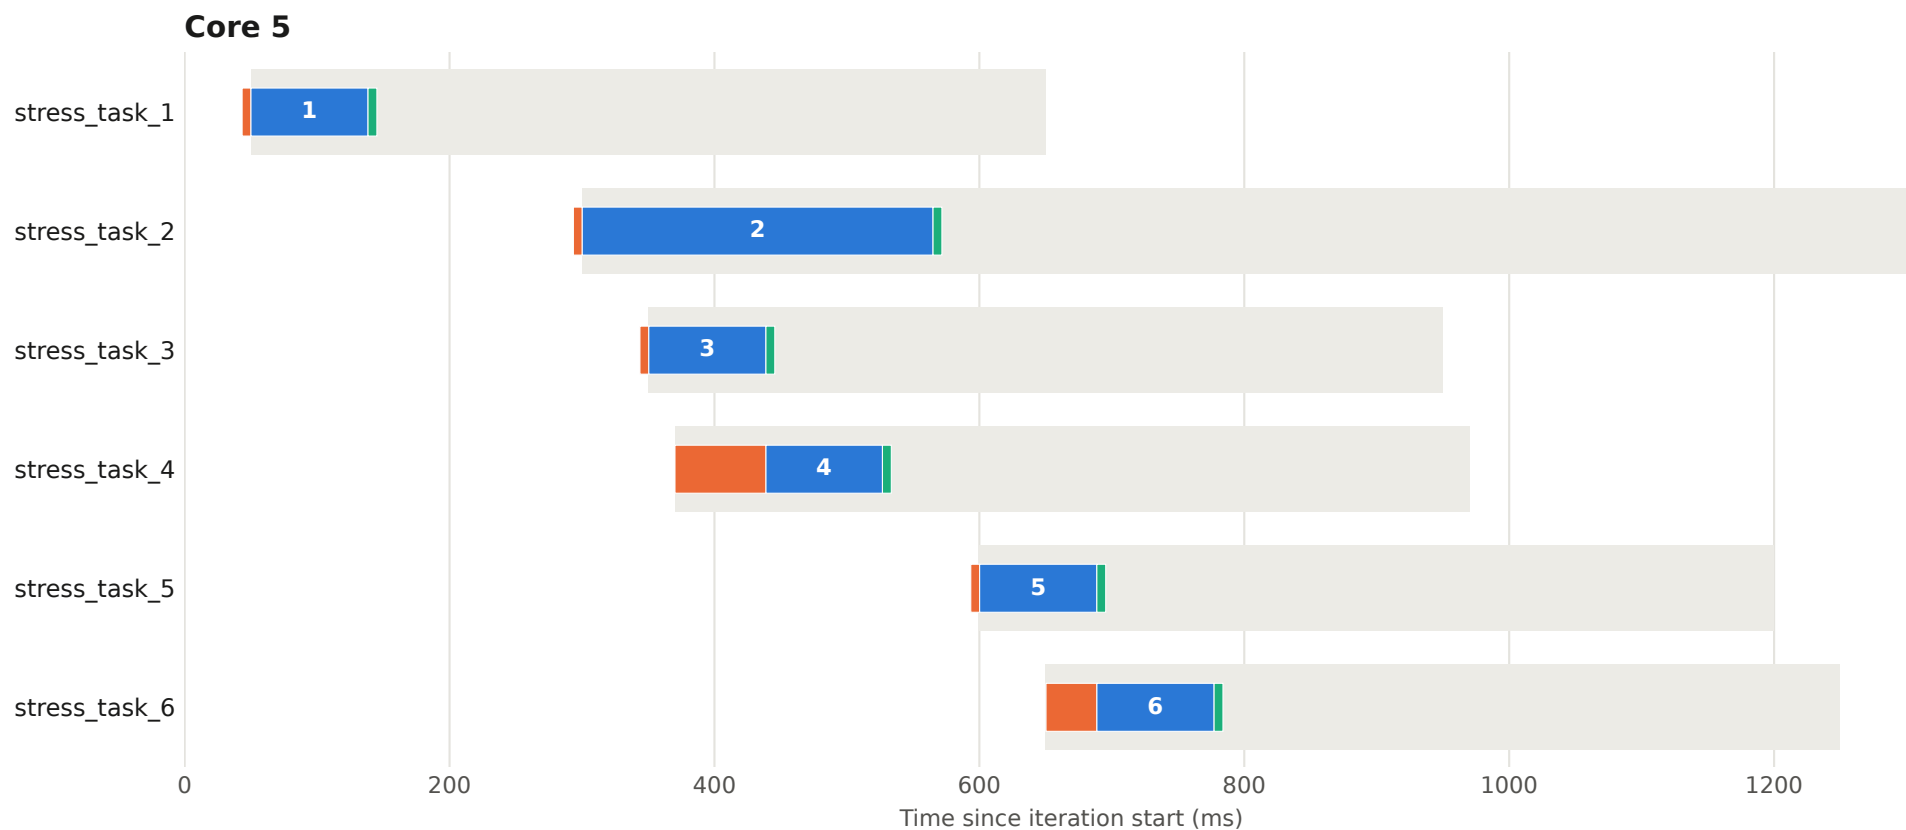


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 98 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

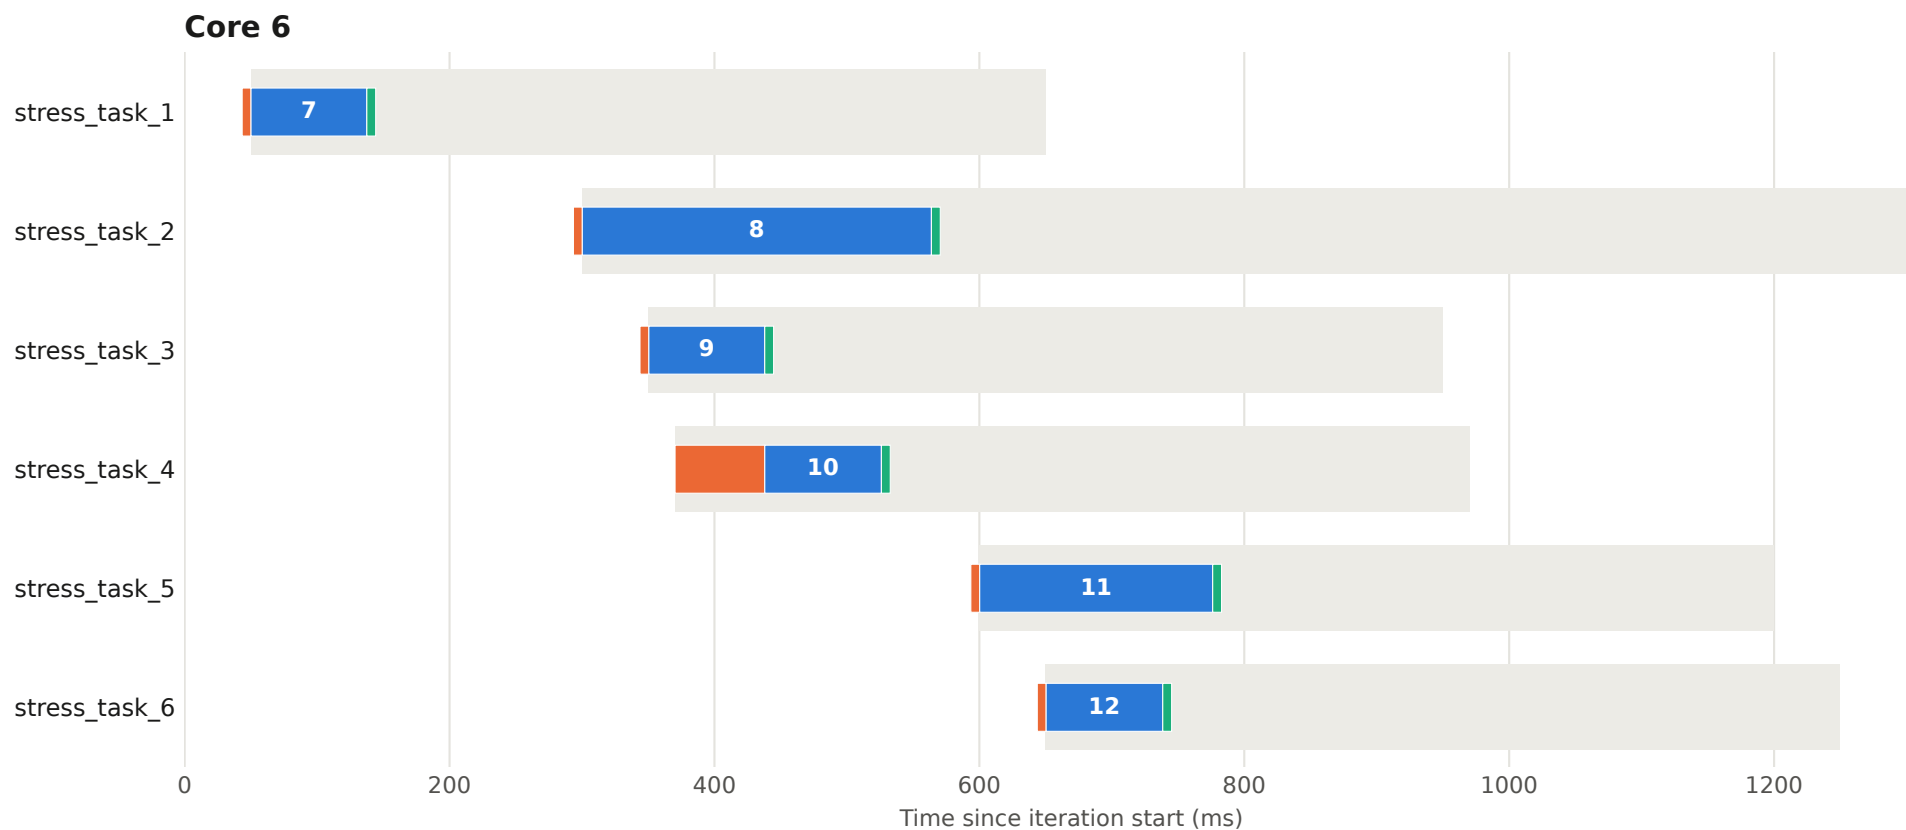


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 99 - core 5

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

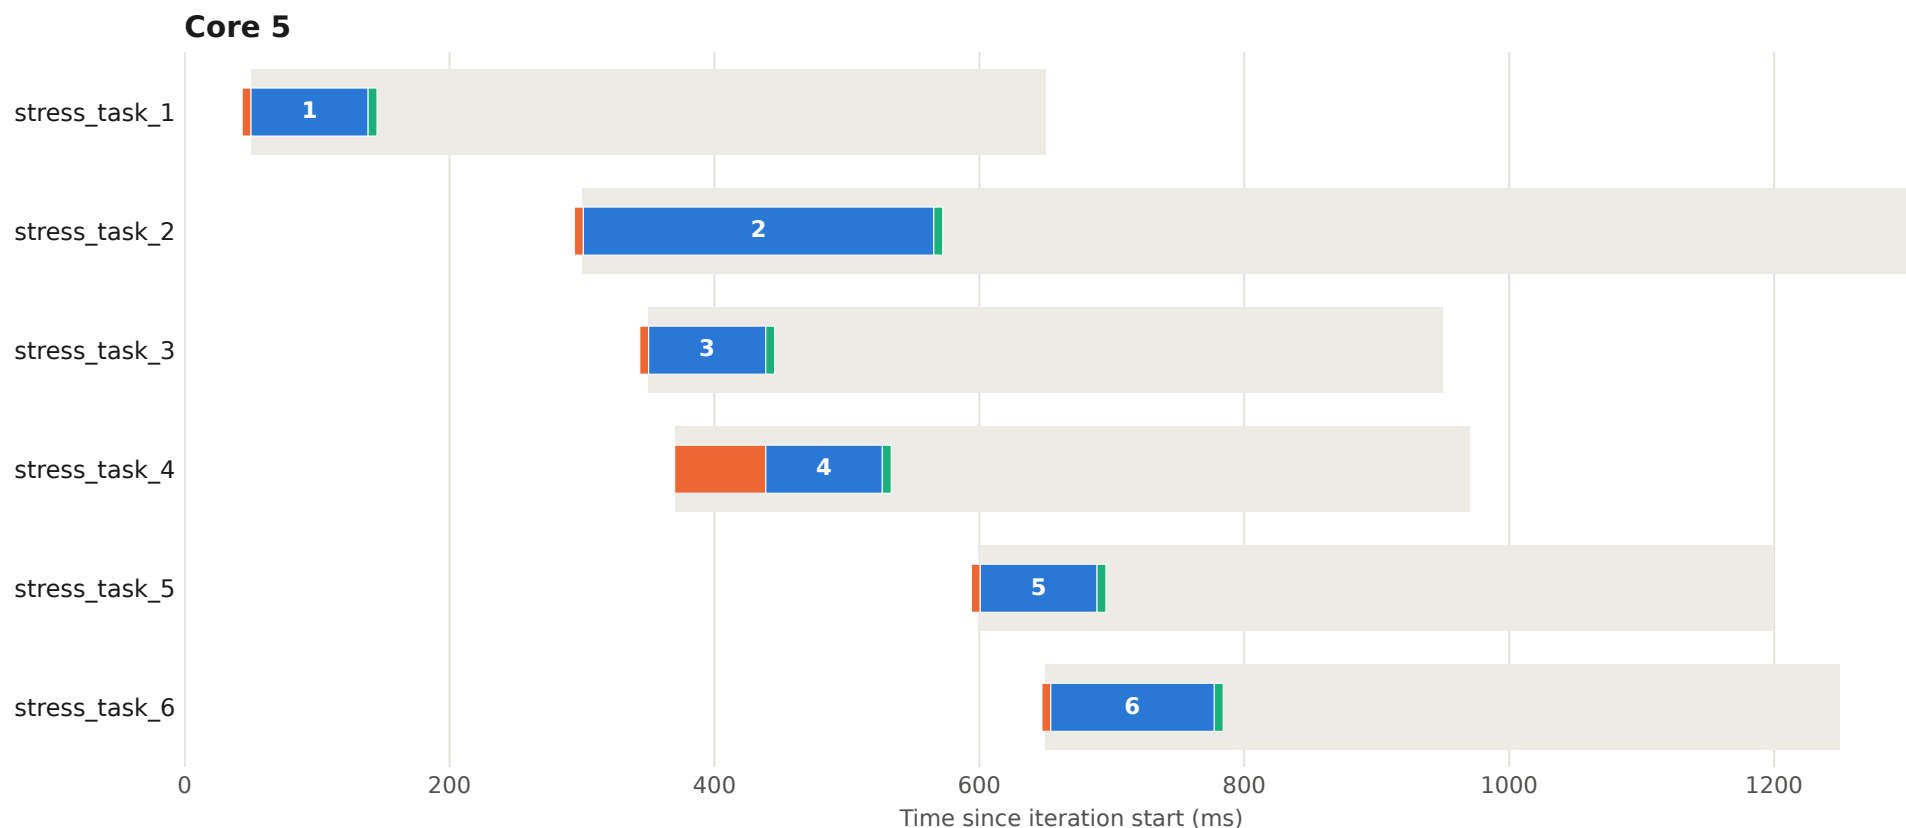


Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.

Execution plan - iteration 99 - core 6

One chart per core; each bar is one task call.

- q_em_tw_ms (execution manager -> task wrapper)
- t_in_tw_ms (inside task wrapper; number = task id)
- q_tw_em_ms (task wrapper -> execution manager)
- planned window (start -> deadline)

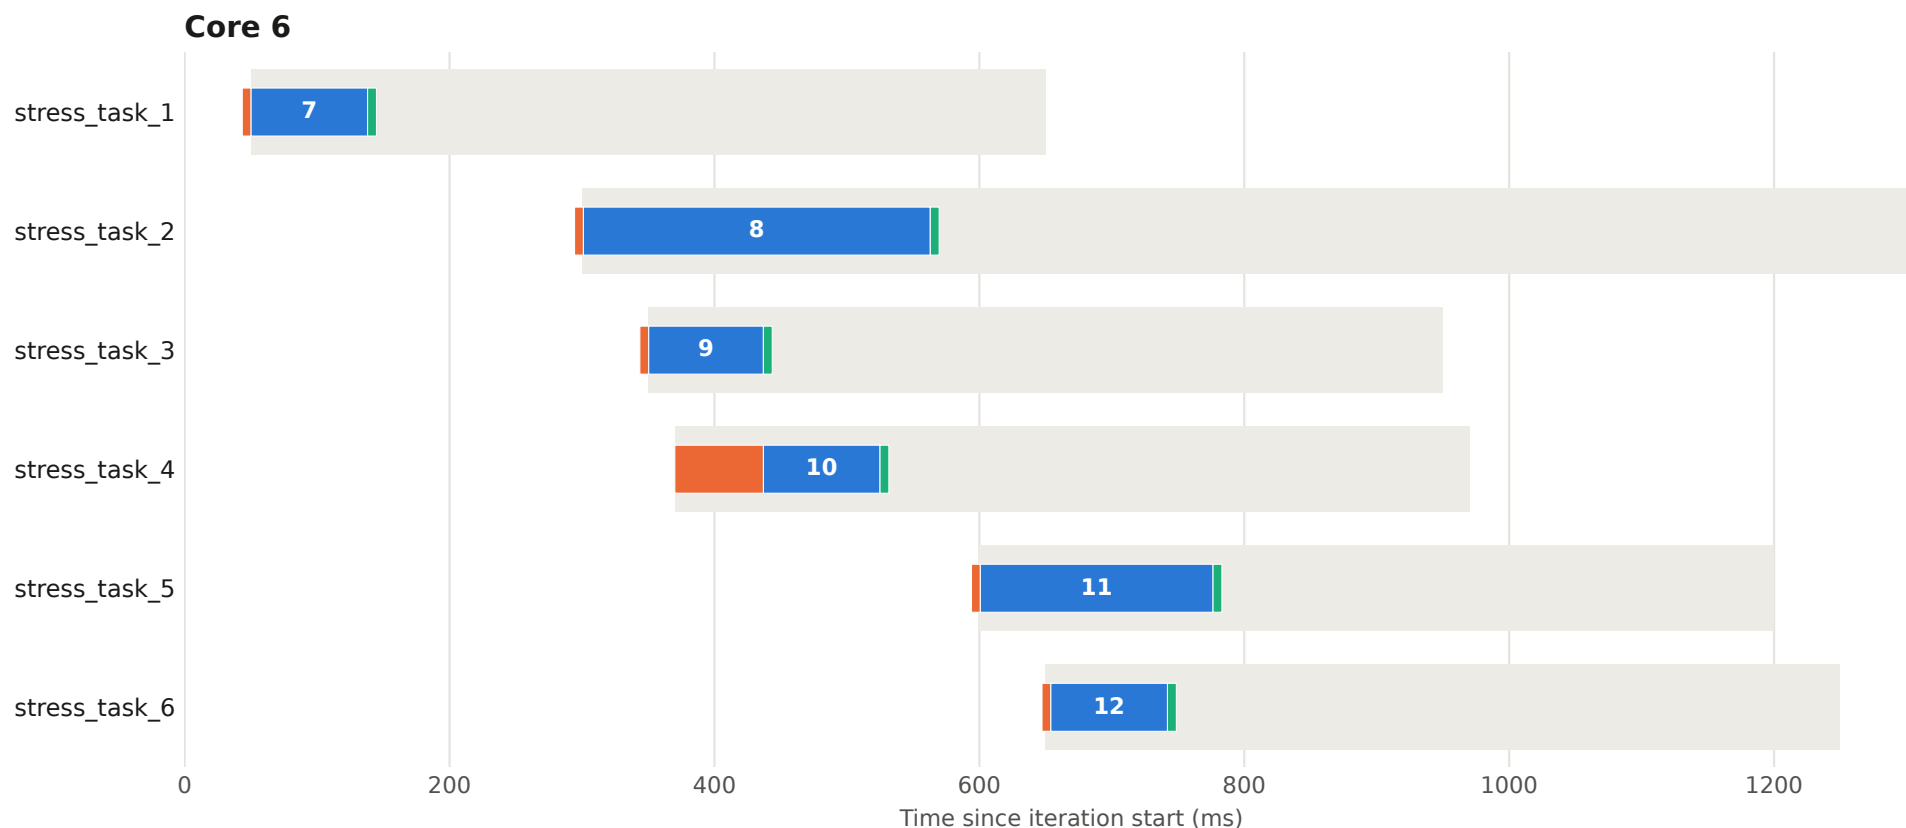

Segments narrower than a few pixels are drawn at a minimum visible width; exact values are in the statistics table and perf.csv.