

# Open Geospatial Consortium

Submission Date: 2021-11-19

Approval Date: <yyyy-mm-dd>

Publication Date: <yyyy-mm-dd>

External identifier of this OGC® document: <http://www.opengis.net/doc/BP/imsw-fm-aer60/1.0>

Internal reference number of this OGC® document: 21-070

Version: 1.0

Category: OGC® Best Practice

Editor: Steve Liang

## **OGC Integrated Methane Sensor Web for Emissions Management Best Practice - Part I - Fugitive Emissions Management based on AER Directive 60**

### **Copyright notice**

Copyright © 2021 Open Geospatial Consortium

To obtain additional rights of use, visit <http://www.opengeospatial.org/legal/>

### **Warning**

This document defines an OGC Best Practice on a particular technology or approach related to an OGC standard. This document is not an OGC Standard and may not be referred to as an OGC Standard. It is subject to change without notice. However, this document is an official position of the OGC membership on this particular technology topic.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Document type: OGC® Best Practice

Document subtype:

Document stage: Draft

Document language: English

## License Agreement

Permission is hereby granted by the Open Geospatial Consortium, ("Licensor"), free of charge and subject to the terms set forth below, to any person obtaining a copy of this Intellectual Property and any associated documentation, to deal in the Intellectual Property without restriction (except as set forth below), including without limitation the rights to implement, use, copy, modify, merge, publish, distribute, and/or sublicense copies of the Intellectual Property, and to permit persons to whom the Intellectual Property is furnished to do so, provided that all copyright notices on the intellectual property are retained intact and that each person to whom the Intellectual Property is furnished agrees to the terms of this Agreement.

If you modify the Intellectual Property, all copies of the modified Intellectual Property must include, in addition to the above copyright notice, a notice that the Intellectual Property includes modifications that have not been approved or adopted by LICENSOR.

THIS LICENSE IS A COPYRIGHT LICENSE ONLY, AND DOES NOT CONVEY ANY RIGHTS UNDER ANY PATENTS THAT MAY BE IN FORCE ANYWHERE IN THE WORLD.

THE INTELLECTUAL PROPERTY IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE DO NOT WARRANT THAT THE FUNCTIONS CONTAINED IN THE INTELLECTUAL PROPERTY WILL MEET YOUR REQUIREMENTS OR THAT THE OPERATION OF THE INTELLECTUAL PROPERTY WILL BE UNINTERRUPTED OR ERROR FREE. ANY USE OF THE INTELLECTUAL PROPERTY SHALL BE MADE ENTIRELY AT THE USER'S OWN RISK. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR ANY CONTRIBUTOR OF INTELLECTUAL PROPERTY RIGHTS TO THE INTELLECTUAL PROPERTY BE LIABLE FOR ANY CLAIM, OR ANY DIRECT, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM ANY ALLEGED INFRINGEMENT OR ANY LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR UNDER ANY OTHER LEGAL THEORY, ARISING OUT OF OR IN CONNECTION WITH THE IMPLEMENTATION, USE, COMMERCIALIZATION OR PERFORMANCE OF THIS INTELLECTUAL PROPERTY.

This license is effective until terminated. You may terminate it at any time by destroying the Intellectual Property together with all copies in any form. The license will also terminate if you fail to comply with any term or condition of this Agreement. Except as provided in the following sentence, no such termination of this license shall require the termination of any third party end-user sublicense to the Intellectual Property which is in force as of the date of notice of such termination. In addition, should the Intellectual Property, or the operation of the Intellectual Property, infringe, or in LICENSOR's sole opinion be likely to infringe, any patent, copyright, trademark or other right of a third party, you agree that LICENSOR, in its sole discretion, may terminate this license without any compensation or liability to you, your licensees or any other party. You agree upon termination of any kind to destroy or cause to be destroyed the Intellectual Property together with all copies in any form, whether held by you or by any third party.

Except as contained in this notice, the name of LICENSOR or of any other holder of a copyright in all or part of the Intellectual Property shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Intellectual Property without prior written authorization of LICENSOR or such copyright holder. LICENSOR is and shall at all times be the sole entity that may authorize you or any third party to use certification marks, trademarks or other special designations to indicate compliance with any LICENSOR standards or specifications. This Agreement is governed by the laws of the Commonwealth of Massachusetts. The application to this Agreement of the United Nations Convention on Contracts for the International Sale of Goods is hereby expressly excluded. In the event any provision of this Agreement shall be deemed unenforceable, void or invalid, such provision shall be modified so as to make it valid and enforceable, and as so modified the entire Agreement shall remain in full force and effect. No decision, action or inaction by LICENSOR shall be construed to be a waiver of any rights or remedies available to it.

# Table of Contents

1. Scope	7
1.1. Roadmap	8
1.2. Design Goals	8
2. Conformance	10
3. References	12
4. Terms and Definitions	13
4.1. Facility ID	13
4.2. Fugitive Emissions	13
4.3. Fugitive Emissions Screenings	13
4.4. Fugitive Emission Surveys	13
4.5. Petrinex	13
4.6. Site	13
4.7. Leak	13
4.8. Local Regulation	14
4.9. Fugitive Emissions Management Program	14
4.10. Vent Emission	14
5. Conventions	15
5.1. Identifiers	15
5.2. Abbreviations	15
6. Methane Emissions	17
6.1. Methane Emissions Sensing Technologies	17
6.1.1. Handheld Instruments	18
6.1.2. Stationary methane sensing systems	19
6.1.3. Terrestrial mobile methane mapping systems	19
6.1.4. Airborne methane remote sensing systems	20
6.1.5. Methane Remote Sensing Satellites	21
7. Fugitive Emissions Management SensorThings API Specification - Part I - AER Directive 60	23
7.1. Requirement Class: Thing	23
7.1.1. Requirement 1	24
7.1.2. Requirement 2	24
7.2. Requirement Class: Location	25
7.2.1. Requirement 3	26
7.2.2. Requirement 4	27
7.3. Requirement Class: Datastream	27
7.3.1. Requirement 5	28
7.3.2. Requirement 6	29
7.3.3. Requirement 7	30
7.3.4. Requirement 8	31

7.3.5. Requirement 9 .....	33
7.3.6. Requirement 10 .....	34
7.4. Requirement Class: ObservedProperty .....	35
7.4.1. Requirement 11 .....	35
7.5. Requirement Class: Observation .....	36
7.5.1. Requirement 12 .....	37
7.6. Requirement Class: FeatureOfInterest .....	37
7.6.1. Requirement 13 .....	38
7.7. Requirement Class: Sensor .....	39
7.7.1. Requirement 14 .....	39
Annex A: Conformance Class Abstract Test Suite (Normative) .....	41
A.1. Conformance Class: Thing .....	41
A.2. Conformance Class: Location .....	42
A.3. Conformance Class: Datastream .....	43
A.4. Conformance Class: ObservedProperty .....	46
A.5. Conformance Class: Observation .....	47
A.6. Conformance Class: FeatureOfInterest .....	47
A.7. Conformance Class: Sensor .....	48
Annex B: Title ( {Normative/Informative} ) .....	49
Annex C: Revision History .....	50
Annex D: Bibliography .....	51

## i. Abstract

<Insert Abstract Text here>

## ii. Keywords

The following are keywords to be used by search engines and document catalogues.

ogcdoc, OGC document, sensor web, methane emissions, Internet of Things, SensorThings, climate change

## iii. Preface

### NOTE

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. The Open Geospatial Consortium shall not be held responsible for identifying any or all such patent rights.

Recipients of this document are requested to submit, with their comments, notification of any relevant patent claims or other intellectual property rights of which they may be aware that might be infringed by any implementation of the standard set forth in this document, and to provide supporting documentation.

## iv. Submitting organizations

The following organizations submitted this Document to the Open Geospatial Consortium (OGC):

SensorUp Inc., the University of Calgary, TC Energy, Fraunhofer IOSB

## v. Submitters

All questions regarding this submission should be directed to the editor or the submitters:

Name	Affiliation
Steve Liang	SensorUp Inc./University of Calgary
John Tang	TC Energy
Patrick Kelly	TC Energy
Sara Saeedi	University of Calgary
Sina Kiaei	University of Calgary
Hylke van der Schaaf	Fraunhofer IOSB

The editor would like to acknowledge that this work is the result of collaboration and review of many organizations and would like to thank for the comments and contributions from:

- GeoConnections, Natural Resources Canada
- Cenovus Energy
- Canadian Natural Resources (CNRL)

- Alberta Innovates

Note: this does not imply a complete endorsement by these organizations.

# Chapter 1. Scope

Methane (CH<sub>4</sub>) is one of the most potent greenhouse gases, and the comparative impact of methane is 25 times greater than CO<sub>2</sub> over a 100-year period [IPCC 2007]. Methane is an invisible and odourless gas, and it is very labour intensive and time consuming in order to detect and repair leaks. Current methane emission management solutions are fragmented and developed without standards, ultimately leading to a complex network of incompatible sensing solutions that need to interrelate but are impossible. However, no single methane sensing technology can meet the accuracy, spatio-temporal resolution, and low-cost requirements. There is a need to interconnect the heterogeneous existing and emerging methane sensing technologies, ranging from satellites, drones, fixed-wing fly-overs, vehicle-based systems, and continuous in-situ monitoring stations to handheld Optical Gas Imaging (OGI) devices. An effective methane emissions management solution requires an integrated methane sensor web. [OGC Sensor Web Enablement \(SWE\)](#) provides the fundamental standard building blocks for the integrated methane sensor web.

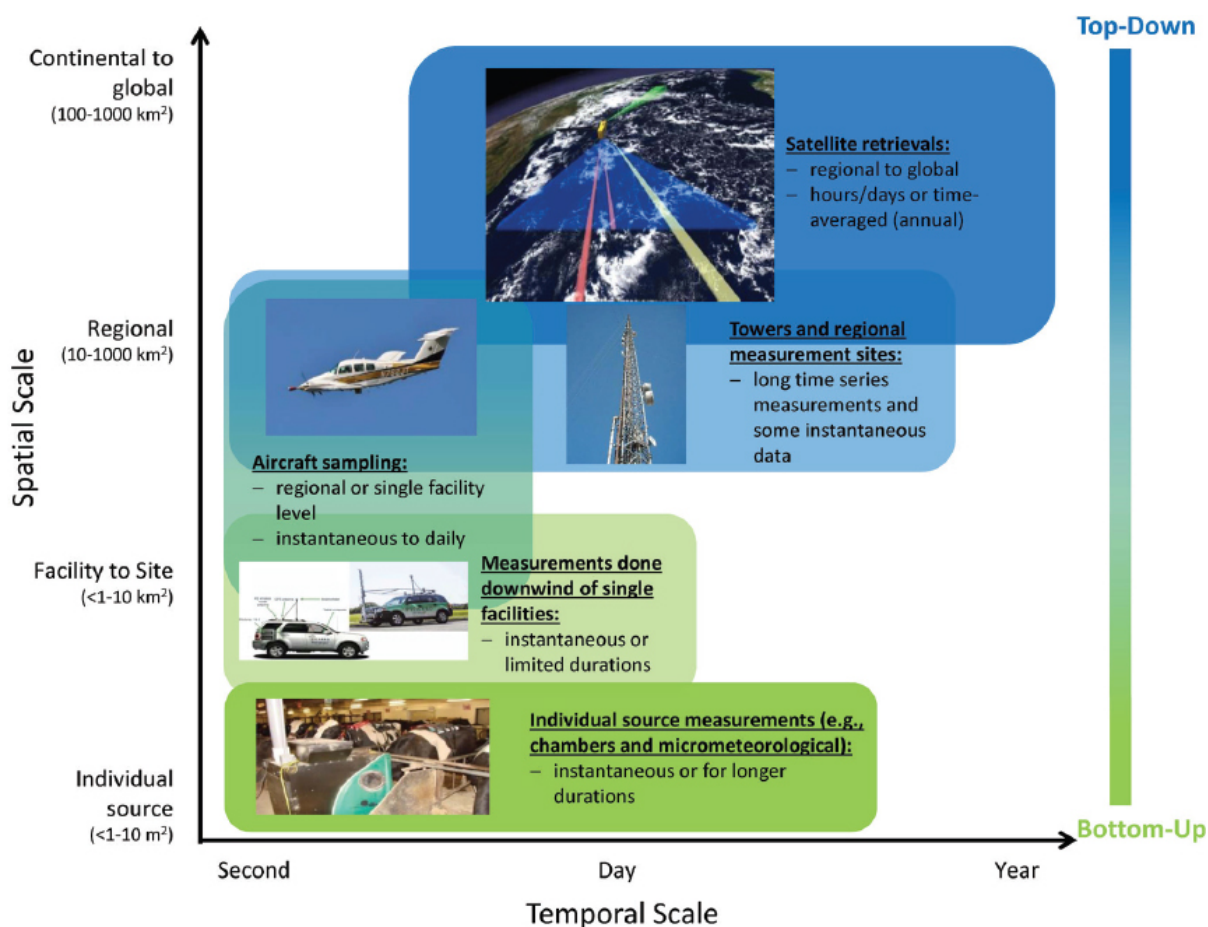


Figure 1. Examples of methane measurement platforms operating across a variety of spatial and temporal scales. ([National Academies of Sciences, Engineering, and Medicine. 2018](#))

This OGC Best Practice (OGC BP) defines a SensorThings API for fugitive methane emissions management. Regulations play a critical role in methane emissions reduction, and how methane emissions are detected, repaired, and managed is highly dependent on local regulations. This OGC BP is designed based on the Alberta Energy Regulator's regulatory requirement for fugitive emissions management [AER Directive 60].

This OGC BP document provides a data model and API for the exchange of fugitive emissions observation data and the necessary metadata, both within and between different organizations. For

example, it can be used for leak detection and repair service providers to prepare and exchange fugitive emissions observation data with the facility operators. Facility operators can also use the OGC BP to exchange fugitive emissions data within the organization and with regulators.

Venting and combustion methane emissions are out of scope in this BP. The development of BP for venting emissions and combustion emissions are on the roadmap.

## 1.1. Roadmap

This OGC BP is the first part of the OGC Integrated Methane Sensor Web for Emissions Management BPs. We plan to publish a series of OGC BPs for methane emissions management, ranging from data sources (e.g., different types of sensing systems) to data destinations (e.g., fugitive and venting emissions for regulatory reporting). The goal is to develop the building blocks for an integrated Methane Emissions Sensor Web, enabling seamless flows of observation data between various nodes: from SensorThings APIs with heterogeneous sensing sources (i.e., multiple disparate methane observation systems), to SensorThings APIs with analytics-ready data (i.e., an aggregated methane emissions datalake), and eventually to SensorThings APIs with compliance-ready data (i.e., data compliant to various regulatory organizations in different jurisdictions).

The figure below shows the roadmap of the different OGC BPs to be developed and their relationship.

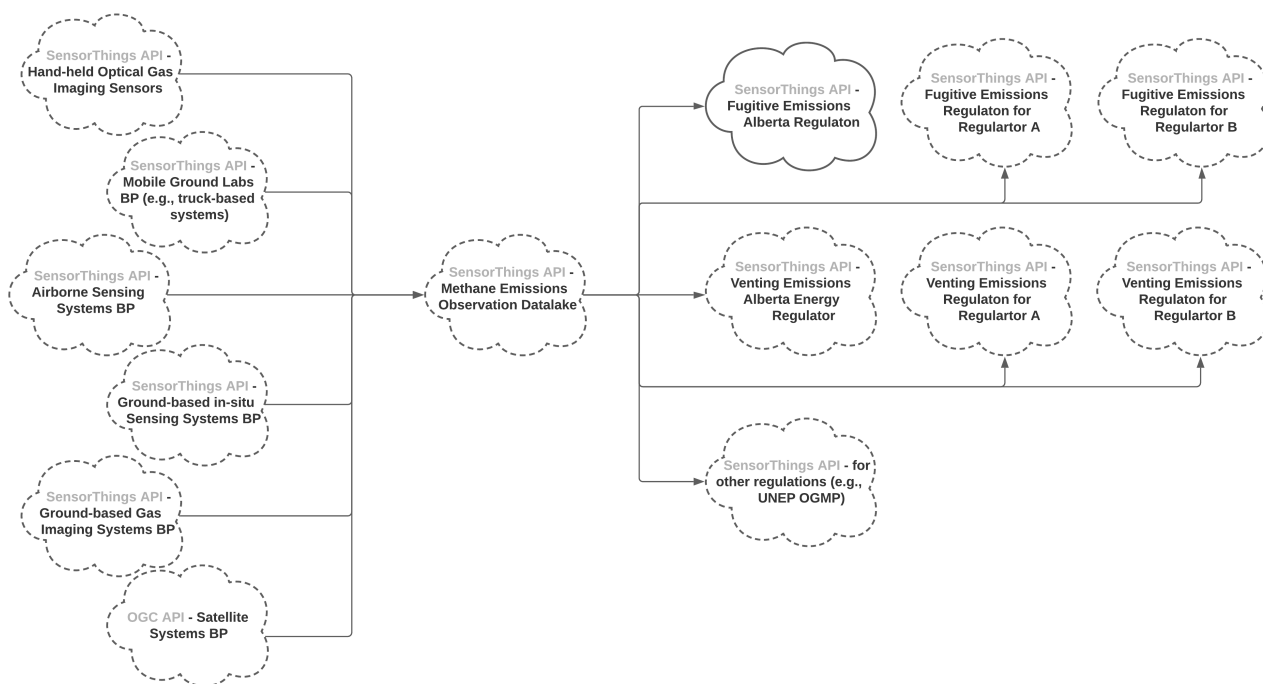


Figure 2. Methane emissions sensor web best practice roadmap

## 1.2. Design Goals

OGC BP and its series have the following design goals:

1. Modular: different parts of a methane emissions management system can be separated and



reassembled, benefiting flexibility, future-proof, and variety in use;

2. Simple: the design is concise, easily testable, easy to implement, and developer-friendly;
3. Interoperable: whenever possible, it follows international open standards;
4. Scalable: it is able to grow in terms of the number of sensors, types of sensors, and volume of data without sacrificing performance.

# Chapter 2. Conformance

This OGC Best Practice (OGC BP) defines a SensorThings API for fugitive methane emissions management based on the Alberta Energy Regulator’s regulatory requirement for fugitive emissions management [AER Directive 60 \(2021\)](#).

Conformance with this OGC BP shall be checked using all the relevant tests specified in annex a (normative) of this document.

All requirement classes and conformance classes described in this document are owned by the document(s) identified.

The following table lists the requirement classes defined in this OGC BP.

## NOTE

The text in the *Requirements class id* and *Requirements* columns in the following table is the path fragment that, when appended to the URI: <http://www.opengis.net/spec/ims-sw-fm-aer60/1.0>, provides the URI that can be used to unambiguously identify the requirement and the conformance class.

Requirements class id	Requirements	Description
/req/datamodel/thing	<ul style="list-style-type: none"><li>• /req/datamodel/thing/properties</li><li>• /req/datamodel/thing/relations</li></ul>	Thing entity
/req/datamodel/location	<ul style="list-style-type: none"><li>• /req/datamodel/location/properties</li><li>• /req/datamodel/location/relations</li></ul>	Location entity

Requirements class id	Requirements	Description
/req/datamodel/datastream	<ul style="list-style-type: none"> <li>• /req/datamodel/datastream/number-of-fugitive-emissions-properties</li> <li>• /req/datamodel/datastream/number-of-fugitive-emissions-relations</li> <li>• /req/datamodel/datastream/fugitive-emissions-volume-properties</li> <li>• /req/datamodel/datastream/fugitive-emissions-volume-relations</li> <li>• /req/datamodel/datastream/fugitive-emissions-mass-properties</li> <li>• /req/datamodel/datastream/fugitive-emissions-mass-relations</li> </ul>	Datastream entity
/req/datamodel/observed-property	<ul style="list-style-type: none"> <li>• /req/datamodel/observed-property/properties</li> </ul>	ObservedProperty entity
/req/datamodel/observation	<ul style="list-style-type: none"> <li>• /req/datamodel/observation/properties</li> </ul>	Observation entity
/req/datamodel/feature-of-interest	<ul style="list-style-type: none"> <li>• /req/datamodel/feature-of-interest/properties</li> </ul>	FeatureOfInterest entity
/req/datamodel/sensor	<ul style="list-style-type: none"> <li>• /req/datamodel/sensor/properties</li> </ul>	Sensor entity

# Chapter 3. References

The following normative documents contain provisions that, through reference in this text, constitute provisions of this document. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. For undated references, the latest edition of the normative document referred to applies.

# Chapter 4. Terms and Definitions

This document uses the terms defined in Sub-clause 5.3 of [OGC 06-121r8], which is based on the ISO/IEC Directives, Part 2, Rules for the structure and drafting of International Standards. In particular, the word “shall” (not “must”) is the verb form used to indicate a requirement to be strictly followed to conform to this Best Practice.

For the purposes of this document, the following additional terms and definitions apply.

## 4.1. Facility ID

A unique facility identification code, with 4 letters and 7 numbers (e.g., ABWP1234567), assigned by Petrinex to each facility [AER Directive 60 (2021)].

## 4.2. Fugitive Emissions

Unintentional releases of hydrocarbons to the atmosphere [AER Directive 60 (2021)].

## 4.3. Fugitive Emissions Screenings

Site-wide evaluations where the primary purpose is to identify fugitive emissions (e.g., from open thief hatches). These are less comprehensive than fugitive emission surveys [AER Directive 60 (2021)].

## 4.4. Fugitive Emission Surveys

Site-wide evaluations that use equipment-based methods to detect and identify sources of fugitive emissions for repair. These surveys are considered comprehensive evaluations that can assist in reducing both small volumes and large volumes of fugitive emissions [AER Directive 60 (2021)].

## 4.5. Petrinex

Canada’s Petroleum Information Network

## 4.6. Site

The area defined by the boundaries of a surface lease for upstream oil and gas facilities and wells (pads counted as one lease) [AER Directive 60 (2021)].

## 4.7. Leak

A release of hydrocarbons from an equipment component is a leak if [Regulations Respecting Reduction in the Release of Methane and Certain Volatile Organic Compounds (2018)]

- (a) the release consists of at least 500 ppmv of hydrocarbons, as determined by an inspection

conducted by means of an eligible portable monitoring instrument in accordance with EPA Method 21; or

- (b) the release is detected
  - (i) during an inspection conducted by means of an eligible optical gas-imaging instrument, or
  - (ii) by means of an auditory method, an olfactory method or a visual method, including the observation of the dripping of hydrocarbon liquids from the equipment component.

## **4.8. Local Regulation**

The federal regulations that apply to methane in the upstream oil and gas sector aim to control methane emissions and also reduce the amount of volatile organic compounds (VOCs) released into the air [Canada's methane regulations (2018)].

## **4.9. Fugitive Emissions Management Program**

A plan and supporting systems to systematically detect and manage fugitive emissions. Fugitive Emissions Management Programs are intended to complement a duty holder's overall emissions reduction strategy [AER Directive 60 (2021)].

## **4.10. Vent Emission**

The intentional controlled release of un-combusted gases directly to the atmosphere [Oil and Gas Glossary and Definitions (2020)].

# Chapter 5. Conventions

This section provides details and examples for any conventions used in the document. Examples of conventions are symbols, abbreviations, use of XML schema, or special notes regarding how to read the document.

## 5.1. Identifiers

The normative provisions in this document are denoted by the URI

<http://www.opengis.net/spec/ims-sw-fm-aer60/1.0>

All requirements and conformance tests that appear in this document are denoted by partial URIs which are relative to this base.

## 5.2. Abbreviations

**AER** Alberta Energy Regulator

**API** Application Programming Interface

**ATS** Alberta Township Survey

**BP** Best Practice

**CNRL** Canadian Natural Resources

**CH<sub>4</sub>** Methane

**EPA** Environmental Protection Agency

**FEM-STA** Fugitive Emissions Management - SensorThings API

**FEMP** Fugitive Emissions Management Program

**GeoJSON** Geographic JSON

**GPS** Global Positioning System

**IANA** Internet Assigned Numbers Authority

**IPCC** Intergovernmental Panel on Climate Change

**ID** Identity Document

**JSON** JavaScript Object Notation

**LDAR** Leak Detection and Repair

**LSD** Legal Subdivisions

**OGC** Open Geospatial Consortium

**OGI** Optical Gas Imaging

**STA** SensorThings API

**SWE** Sensor Web Enablement

**URI** Uniform Resource Identifierswe

**VOC** Volatile Organic Carbon



# Chapter 6. Methane Emissions

Methane (CH<sub>4</sub>) is one of the most potent greenhouse gases, and the comparative impact of methane is 25 times greater than CO<sub>2</sub> over a 100-year period [IPCC 2007]. Methane is an invisible and odourless gas, and it is very labour intensive and time consuming in order to detect and repair the leaks. Current methane emission management solutions are fragmented and being developed without standards, ultimately leading to a complex network of incompatible sensing solutions that need to interrelate but are not possible. However there is no single methane sensing technology that can meet the accuracy, spatio-temporal resolution, and low-cost requirements. There is a need to interconnect the heterogeneous existing and emerging methane sensing technologies, ranging from satellites, drones, fixed-wing fly-overs, vehicle-based systems, continuous in-situ monitoring stations, to handheld Optical Gas Imaging (OGI) devices. An effective methane emissions management solution needs an integrated methane sensor web. OGC Sensor Web Enablement (SWE) provides the fundamental standard building blocks for the integrated methane sensor web.

## 6.1. Methane Emissions Sensing Technologies

Methane emissions sensing technologies can be categorized by the methane sensor types or by the methane sensing platforms. Based on its sensing principles, methane sensors can be categorized into the following types: (1) optical sensors, (2) calorimetric sensors, (3) pyroelectric sensors, (4) semiconducting metal oxide sensors, and (5) electrochemical sensors. Readers interested in the details of different methane sensing principles can refer to [Aldhafeeri 2020], and it provides a comprehensive review of methane gas detection sensors, including the recent development and future perspectives. For the leak detection and repair applications, optical sensors, either laser spectroscopy or imaging spectrometry, are the most common sensor type being used. The following table summarize their advantages and disadvantages.

*Table 1. Methane sensor types, their advantages and disadvantages [adapted from [Aldhafeeri 2020 Table 1]*

Methane Sensor Types	Advantages	Disadvantages
Optical sensors	Non-destructive; immune to electromagnetic interference; operate without oxygen	Expensive; high power consumption; lack of significance and distinctiveness of methane optical absorption region
Calorimetric sensors	Low cost; simple; portable; easy to manufacture; good selectivity for methane; can operate in harsh environmental conditions	Low detection accuracy; susceptible to cracking, catalyst poisoning and oversaturation; high power consumption; short lifespan; require high temperature

<b>Methane Sensor Types</b>	<b>Advantages</b>	<b>Disadvantages</b>
Pyroelectric sensors	Non-destructive; operate without oxygen; good sensitivity and responsivity; wide measuring range; operate at room temperature	High cost; high power consumption; immobile; difficult to manufacture
Semiconducting metal oxide sensors	Low cost; lightweight and robust; long lifespan; resistant to poisoning	Poor selectivity; small and high operational temperature range; slow recovery rate; significant addictive dependency; affected by temperature; susceptible to degradation; sensitive to changes in humidity
Electrochemical sensors	Three different sub-types: AE, IL, and SE. AE-based: low cost. IL-based: non-hazardous materials; high boiling points and low volatility; good selectivity for methane; can detect small leaks. SE-based: no leakage; safe; robust; good selectivity for methane; can detect small leaks	AE-based: susceptible to leakage and evaporation; hazardous materials; slow response time. IL-based: susceptible to leakage; slow response time. SE-based: require high temperature; unable to detect low gas concentrations; susceptible to degradation or loss of electrolyte.

In terms of the methane sensing platforms, it can be categorized into the following types: (1) handheld instruments, (2) stationary in-situ or remote sensing sensors, (3) terrestrial mobile methane mapping systems , (4) airborne remote sensing systems, and (5) spaceborne remote sensing satellites. The following sections briefly introduce each methane sensing platform.

### 6.1.1. Handheld Instruments

For many years the standard leak detection practice has been [EPA method 21: Determination of Volatile Organic Carbon Leaks](#). EPA method 21 requires that components be surveyed using a method 21 compliant portable instrument that can measure the volatile organic carbon (VOC) concentration near each component with high accuracy. However, method 21 is the most labor intensive and time consuming method. For example, it may take four to eight hours to complete surveying the components of a well pad. As a result, there are multiple attempts to develop new sensing technologies/platforms to replace method 21. Optical gas-imaging (OGI) cameras is the other type of handheld instrument, and it has been approved by many regulatory bodies. OGI cameras are a close-range remote sensing cameras that provide images and videos of methane leaks that are invisible to the human eye. It is intuitive to communicate and easy to document and report. OGI cameras are also twice more efficient than method 21. It is worth to note that method

21 and OGI cameras are the only methods that are able to accurately locate methane leaks at the component level. Locating leaking components are critical because the leaks can only be stopped by either repairing or replacing the components.



*Figure 3. A field technician performs methane emission survey with an optical gas imaging camera [Zimmerle et al., 2020]*

### **6.1.2. Stationary methane sensing systems**

Stationary sensors are deployed near the potential methane emissions sources, and provide continuous methane concentration observations. Based on the sensor type, it can be further categorized into close-range remote sensing systems and in-situ sensing systems. Example of close-range methane remote sensing systems include Rebellion Photonics (acquired by Honeywell), Kuva systems, etc. Examples of in-situ methane sensing systems include Aeris Sensors, Project Canary, Eco-esolutions, Quanta3, Scientific Aviation, Teledyne, Troposphere and more. Low-cost in-situ methane sensor networks has a potential to be the future of methane leak detection technology, because it can potentially operate at a cost comparable to or even lower than currently periodic, manual inspections that typically using the handheld instruments described in the section above. However, peer-reviewed researches and validations of the existing commercial systems are currently missing. There are multiple research projects, such as UT Austin's Project Astra or University of Calgary's Emissions Testing Centre, focusing on validating the performances of these low-cost sensing systems.

Comparing to other sensing platforms, one unique advantage of stationary sensors is its high temporal resolution. A network of methane stationary sensor networks has the potential to detect fugitive emissions almost instantaneously, and that means leaks can potentially be repaired before the regular visits (typically three times a year, depends on site types and regulations). Stationary methane sensing systems are well suited for facilities with high component density, such as refineries, gas plants, compressor stations, and multi-well pads.

### **6.1.3. Terrestrial mobile methane mapping systems**

Terrestrial vehicles equipped with methane sensors and anemometers to account for atmospheric conditions can be used to screen methane emissions over a large area very efficiently. For example,

Atherton et al (2017) demonstrated that over 1600 well pads were surveyed across nearly 8000 km of roads. Comparing to other sensing platforms, terrestrial mobile methane mapping systems have the following advantages: (1) do not require site access, (2) less time spent at each site, (3) minimal coordination with facility operators required, and (4) provide an efficient approach for regulators to audit the reports submitted by facility operators. However, these systems are constrained by road access and weather conditions, especially wind directions. Without sufficient wind or if wind is blowing in the wrong directions, methane plumes may not reach the roads and thus methane leaks cannot be detected by the terrestrial mobile methane mapping systems.

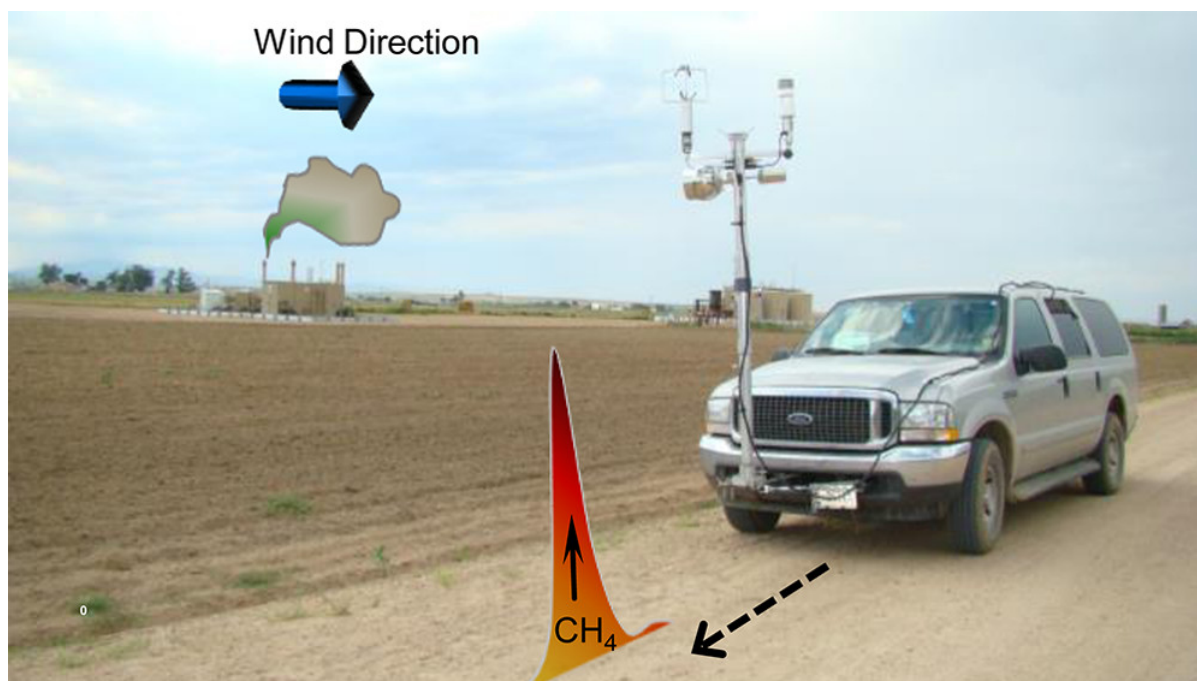


Figure 4. A methane measurement mobile ground lab system [Brantley, et al. 2014]

#### 6.1.4. Airborne methane remote sensing systems

Airborne methane remote sensing systems can be further categorized into two types: (1) piloted aircraft, including helicopter and fixed wing airplanes, and (2) Unmanned Aerial Vehicles (UAVs). Different types of methane sensors can be mounted on the airborne vehicles to detect emissions over large areas in a short amount of time. Some airborne systems, such as Scientific Aviations [Conley et al, 2016], use in-situ sensors, that are similar or identical to terrestrial systems, to process air samples for methane concentrations. Some airborne systems, such as Bridger Photonics [Johnson, et al. 2021], uses remote sensing technologies such as LiDAR, to detect emissions on the ground. The main advantage of piloted airborne systems is that it is able to cover a large area very efficiently, and unlike terrestrial systems airborne systems they are not constrained by roads. However, the operational cost is higher comparing to the terrestrial systems.



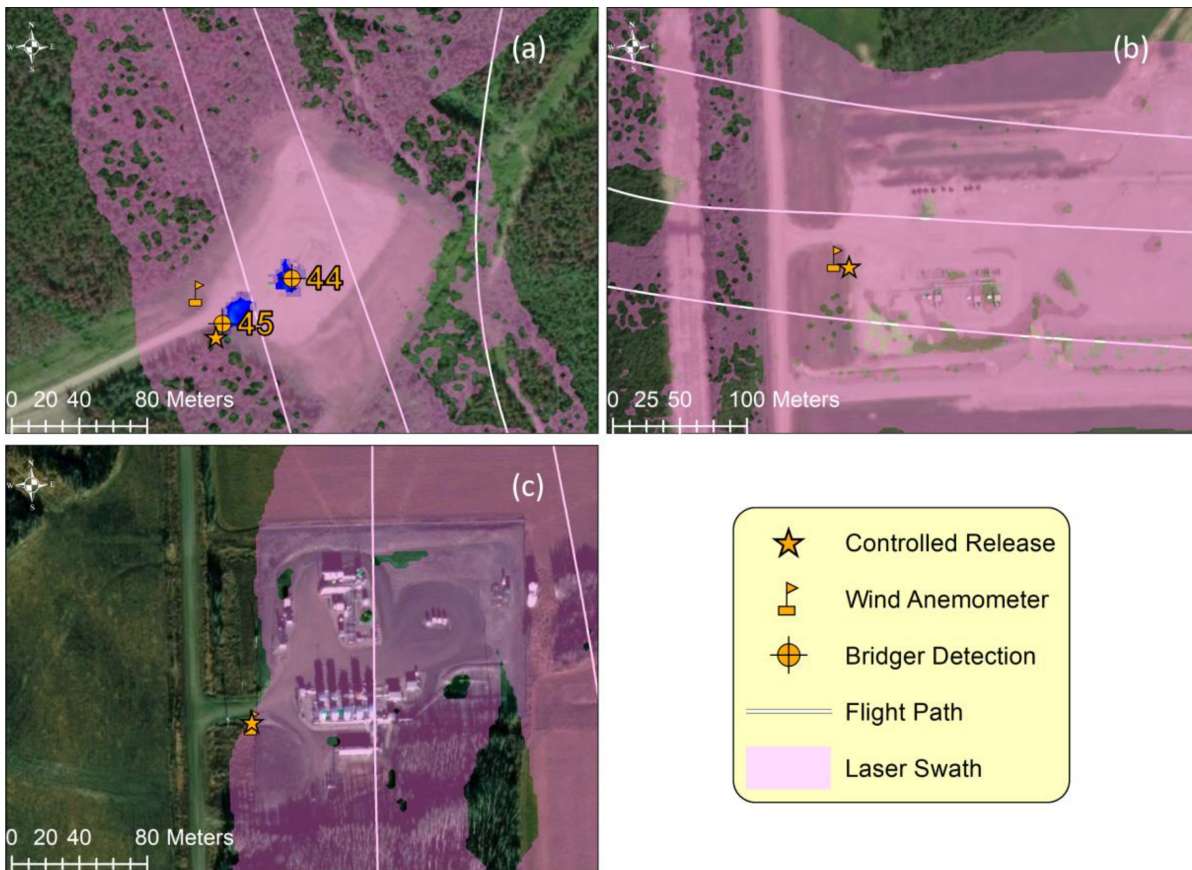


Figure 5. Example data of Bridger Photonics [Johnson, et al. 2021]

Comparing to piloted airborne systems, UAV-based systems can perform observations very close to the potential emissions sources, as a result they can detect methane emissions with much lower emissions rates. However, many methane sensors are power-hungry and not suitable for UAVs, that are constrained by the battery capacity and weight. Further innovations, such as lightweight and power-efficient sensors, are required in order for UAVs to become a suitable methane sensing platform.

### 6.1.5. Methane Remote Sensing Satellites

Similar to all Earth Observation (EO) satellites, methane remote sensing satellites provides much larger spatial coverage comparing to other sensing platforms. However, existing methane remote sensing satellites capture low-resolution images and cannot detect methane emissions with a low emissions rate. Methane remote sensing satellite is well suited for detecting large emission sources. Example methane remote sensing satellites includes GOSAT, TROPOMI, GHGSat, and Carbon Mapper.

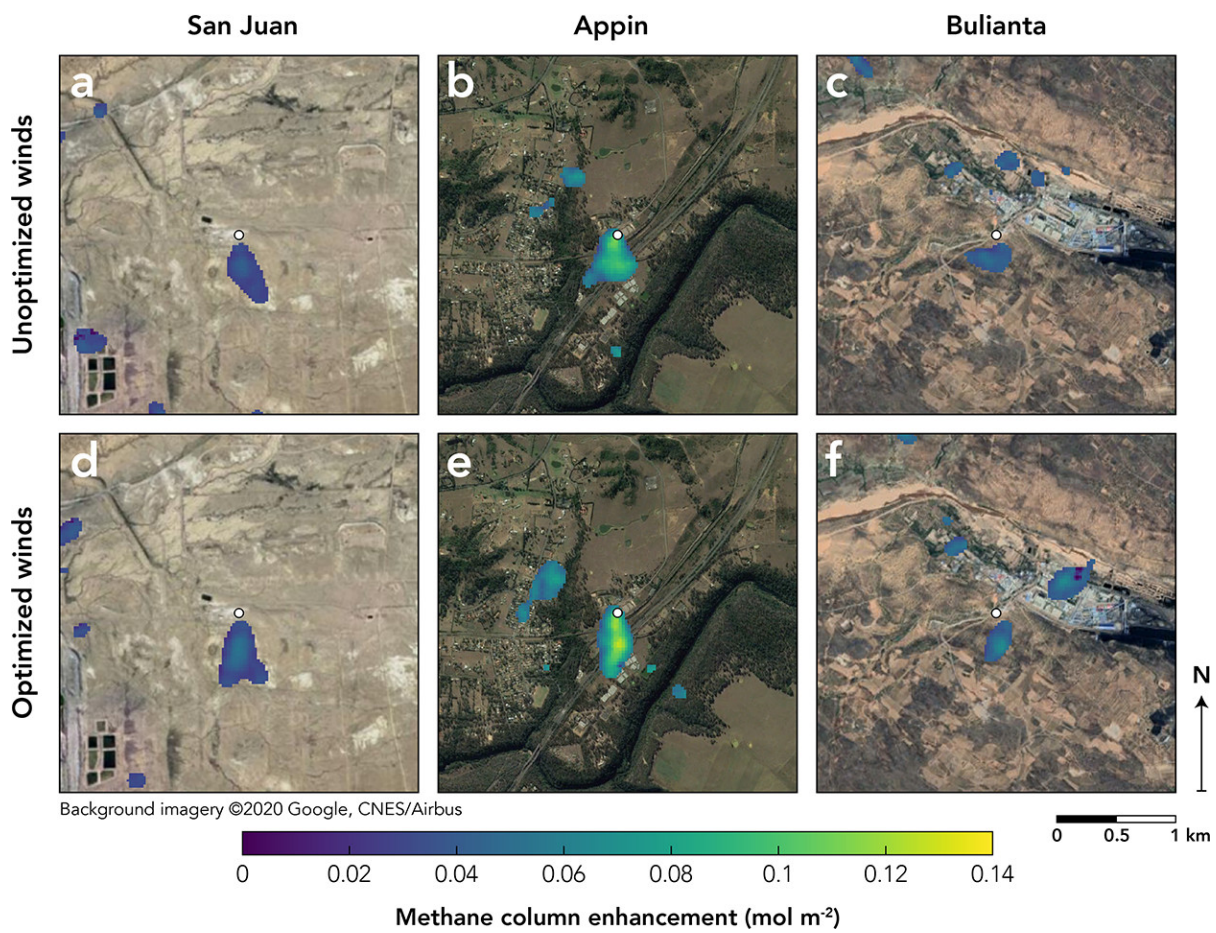


Figure 6. Example data of GHGSat [Varon *et al.*, 2020]

# Chapter 7. Fugitive Emissions Management

## SensorThings API Specification - Part I - AER Directive 60

This chapter describes the entities, their properties and values, and their relations for fugitive emissions reporting requirements based on [AER Directive 60](#).

The SensorThings API Entities of this Best Practice are depicted in the following figure.

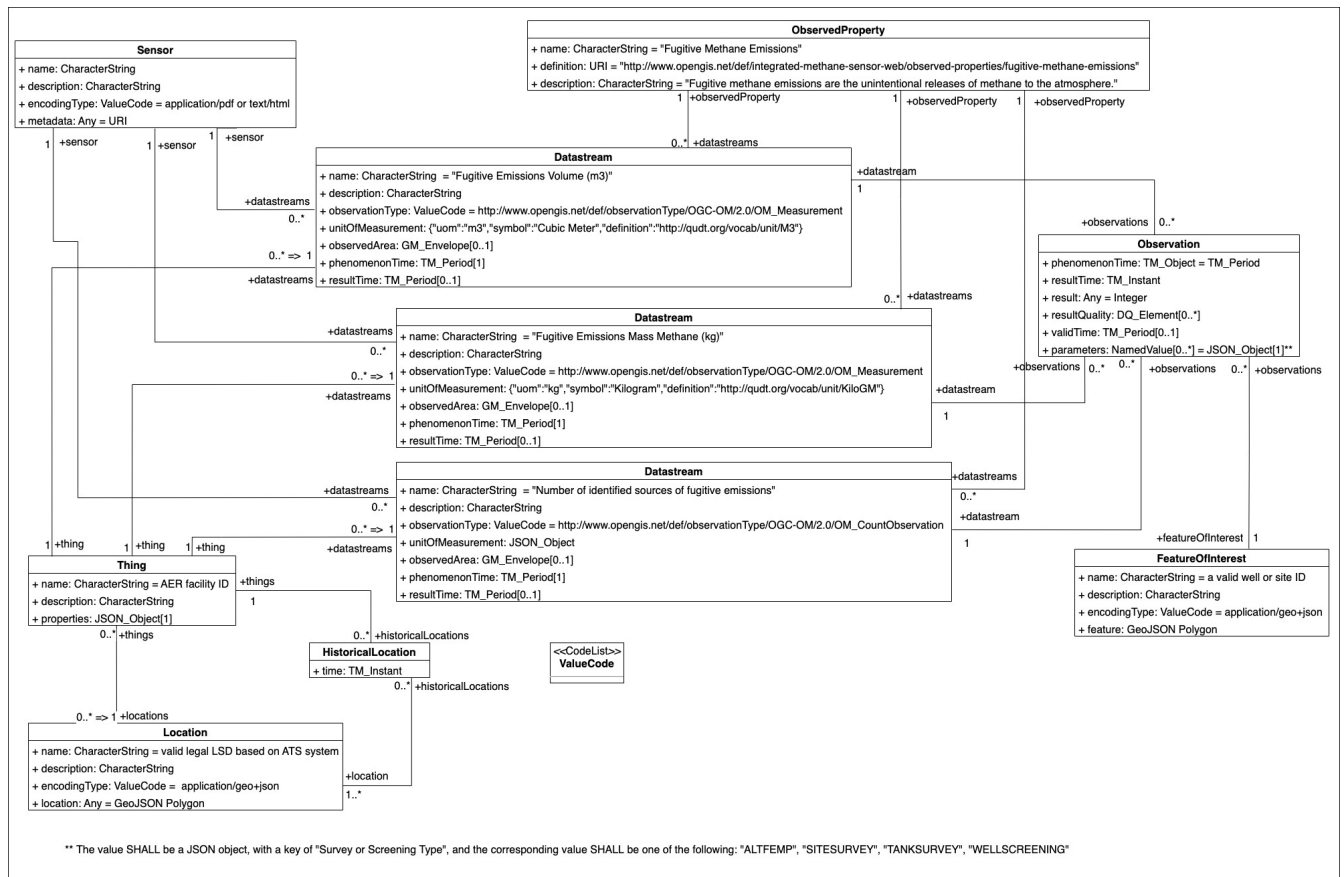


Figure 7. SensorThings API Entities for the Fugitive Emissions AER 60 Best Practice

## 7.1. Requirement Class: Thing

Requirements Class	
<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/thing">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/thing</a>	
Target type	JSON Object Instance
Dependency	<a href="http://www.opengis.net/spec/iot_sensing/1.1/req/datamodel/thing">http://www.opengis.net/spec/iot_sensing/1.1/req/datamodel/thing</a>

<b>Requirement 1</b>	<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/thing/properties">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/thing/properties</a>  This requirement defines the mandatory properties of a <i>reporting facility</i> (as a Thing).
<b>Requirement 2</b>	<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/thing/relations">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/thing/relations</a>  This requirement defines the direct relation between the "Thing" entity and the "Location" and "Datastream" entities.

### 7.1.1. Requirement 1

This requirement defines the mandatory properties of a *reporting facility* (as a Thing).

<b>Requirement 1</b>	/req/datamodel/thing/properties  The SensorThings SHALL have a “Thing” entity that has the properties with the corresponding value and multiplicity listed in <a href="#">Table 1</a> .
----------------------	---

Table 2. Properties of a reporting facility "Thing" entity

Name	Definition	Data types and values	Multiplicity and use
name	The facility ID of the <i>reporting facility</i>	Character string type, and the value shall be a valid AER facility ID	One
description	A short description of the facility	Character string type	One
properties	The well ID or site ID that is associated with the facility ID	A JSON object that has a key of "well or site id" and the corresponding value shall be a valid AER well ID or site ID	One

### 7.1.2. Requirement 2

This requirement defines the direct relation between the "Thing" entity and the "Location" and "Datastream" entities.



<b>Requirement 2</b>	<p>/req/datamodel/thing/relations</p> <p>The “Thing” entity SHALL have the direct relation between the “Thing” entity and the entities listed in <a href="#">Table 2</a>.</p>
----------------------	---

Table 3. Direct relation between a reporting facility “Thing” entity and other entity types

Entity type	Relation	Description
Location	One mandatory	A <i>reporting facility</i> “Thing” SHALL have one Location. Multiple <i>reporting facilities</i> “Thing” MAY be located at the same “Location”.
Datastream	Three-to-many mandatory	A <i>reporting facility</i> “Thing” SHALL have three related Datastream entities, describing the <i>number-of-fugitive-emissions</i> , the <i>fugitive-emissions-volume</i> , and the <i>fugitive-emissions-mass</i> respectively. A <i>reporting facility</i> “Thing” MAY have additional “Datastreams”.

## 7.2. Requirement Class: Location

Requirements Class	
<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/location">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/location</a>	
Target type	JSON Object Instance
Dependency	<a href="http://www.opengis.net/spec/iot_sensing/1.1/req/datamodel/location">http://www.opengis.net/spec/iot_sensing/1.1/req/datamodel/location</a>
<b>Requirement 3</b>	<p><a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/location/properties">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/location/properties</a></p> <p>This requirement defines the mandatory properties of the “Location” entity of a <i>reporting facility</i>.</p>

<b>Requirement 4</b>	<a href="http://www.opengis.net/spec/ims-sw-fm-aer60/1.0/req/datamodel/location/relations">http://www.opengis.net/spec/ims-sw-fm-aer60/1.0/req/datamodel/location/relations</a>  This requirement defines the direct relation between the "Location" entity and the "Thing" entity.
----------------------	---

### 7.2.1. Requirement 3

This requirement defines the mandatory properties and relations of the "Location" of the *reporting facility*.

<b>Requirement 3</b>	/req/datamodel/location/properties  The SensorThings SHALL have a "Location" entity that has the properties with the corresponding value and multiplicity listed in <a href="#">Table 3</a> .
----------------------	---

Table 4. Properties of a reporting facility Location entity

Name	Definition	Data types and values	Multiplicity and use
name	The <i>reporting facility's</i> legal description of the Legal Subdivision (LSD) according to the <a href="#">Alberta Township Survey (ATS)</a> system	Character string type, and the value shall be a valid legal description of the LSD based on the ATS system	One
description	The description about the Location	Character string type	One
encodingType	The IANA media type for GeoJSON	Character string type, and the value shall be "application/geo+json"	One
location	The GeoJSON polygon <a href="#">[RFC7946]</a> represents the area of the legal description LSD	A GeoJSON Polygon object, and the value of the GeoJSON Polygon coordinates shall be the boundary of the legal description LSD	One

### 7.2.2. Requirement 4

This requirement defines the direct relation between the "Location" entity and the "Thing" entity.

<b>Requirement 4</b>	<a href="/req/datamodel/location/relations">/req/datamodel/location/relations</a>  The "Location" entity SHALL have the direct relation between the "Location" entity and the entities listed in <a href="#">Table 4</a> .
----------------------	--

Table 5. Direct relation between a reporting facility Location entity and the Thing entity

Entity type	Relation	Description
Thing	Many optional	Multiple <i>reporting facilities</i> "Thing" MAY be located at the same "Location". A Location MAY not have a <i>reporting facility</i> "Thing".

## 7.3. Requirement Class: Datastream

Requirements Class	
<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/datastream">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/datastream</a>	
Target type	JSON Object Instance
Dependency	<a href="http://www.opengis.net/spec/iot_sensing/1.1/req/datamodel/datastream">http://www.opengis.net/spec/iot_sensing/1.1/req/datamodel/datastream</a>
<b>Requirement 5</b>	<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/datastream/number-of-fugitive-emissions-properties">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/datastream/number-of-fugitive-emissions-properties</a>  This requirement defines the mandatory properties of the <i>number-of-fugitive-emissions</i> "Datastream" entity of a <i>reporting facility</i> "Thing".
<b>Requirement 6</b>	<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/datastream/number-of-fugitive-emissions-relations">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/datastream/number-of-fugitive-emissions-relations</a>  This requirement defines the direct relation between the <i>number-of-fugitive-emissions</i> "Datastream" entity and the "Thing", "Sensor", "ObservedProperty", and "Observation" entity.
<b>Requirement 7</b>	<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/datastream/fugitive-emissions-volume-properties">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/datastream/fugitive-emissions-volume-properties</a>  This requirement defines the mandatory properties of the <i>fugitive-emissions-volume</i> "Datastream" entity of a <i>reporting facility</i> "Thing".

<b>Requirement 8</b>	<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/datastream/fugitive-emissions-volume-relations">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/datastream/fugitive-emissions-volume-relations</a>  This requirement defines the direct relation between the <i>fugitive-emissions-volume</i> "Datastream" entity and the "Thing", "Sensor", "ObservedProperty", and "Observation" entity.
<b>Requirement 9</b>	<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/datastream/fugitive-emissions-mass-properties">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/datastream/fugitive-emissions-mass-properties</a>  This requirement defines the mandatory properties of the <i>fugitive-emissions-mass</i> "Datastream" entity of a <i>reporting facility</i> "Thing".
<b>Requirement 10</b>	<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/datastream/fugitive-emissions-mass-relations">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/datastream/fugitive-emissions-mass-relations</a>  This requirement defines the direct relation between the <i>fugitive-emissions-mass</i> "Datastream" entity and the "Thing", "Sensor", "ObservedProperty", and "Observation" entity.

### 7.3.1. Requirement 5

This requirement defines the mandatory properties of the *number-of-fugitive-emissions* "Datastream" of the *reporting facility*.

<b>Requirement 5</b>	/req/datamodel/datastream/number-of-fugitive-emissions-properties  The <i>reporting facility</i> "Thing" SHALL have a <i>number-of-fugitive-emissions</i> "Datastream" entity that has the properties with the corresponding value and multiplicity listed in <a href="#">Table 5</a> .
----------------------	---

Table 6. Properties of a *number-of-fugitive-emissions* Datastream entity

Name	Definition	Data types and values	Multiplicity and use
name	Number of identified sources of fugitive emissions	Character string type, and the value shall be "Number of identified sources of fugitive emissions"	One
description	A short description of the Datastream	Character string type	One

Name	Definition	Data types and values	Multiplicity and use
observationType	The observation type of the <i>number-of-fugitive-emissions</i> "Observation" is a <a href="#">ISO/OGC 19156</a> count observation	The value shall be compliant with <a href="#">OM_CountObservation</a>	One
phenomenonTime	This "Datastream" SHOULD have a phenomenonTime, describes the temporal interval of the phenomenon times of all observations belonging to this Datastream	TM_Period (ISO 8601 Time Interval)	One

### 7.3.2. Requirement 6

This requirement defines the direct relation between the "Datastream" entity and other entity types.

<b>Requirement 6</b>	<p>/req/datamodel/datastream/number-of-fugitive-emissions-relations</p> <p>The <i>number-of-fugitive-emissions</i> "Datastream" entities SHALL have the direct relation between the "Datastream" entity and the entities listed in <a href="#">Table 6</a>.</p>
----------------------	---

Table 7. Direct relation between a number-of-fugitive-emissions Datastream entity and other entity types

Entity type	Relation	Description
Thing	One mandatory	Each <i>number-of-fugitive-emissions</i> "Datastream" SHALL have one and only one <i>reporting facility</i> "Thing". A <i>reporting facility</i> "Thing" SHALL have one and only one <i>number-of-fugitive-emissions</i> "Datastream".

Entity type	Relation	Description
Sensor	One mandatory	<p>The "Observations" in a <i>number-of-fugitive-emissions</i> "Datastream" are performed by one "Sensor". One "Sensor" MAY be used by different Datastreams.</p> <p><b>Note:</b> A "Sensor" in this best practice is an observation process describing the Fugitive Emissions Management Program (FEMP) that generates the observation result.</p>
ObservedProperty	One mandatory	<p>The "Observations" of a <i>number-of-fugitive-emissions</i> "Datastream" SHALL observe the methane fugitive emissions "ObservedProperty" as defined in Requirement 11.</p>
Observation	Many optional	<p>A <i>number-of-fugitive-emissions</i> "Datastream" has zero-to-many "Observations". One Observation SHALL occur in one-and-only-one "Datastream".</p>

### 7.3.3. Requirement 7

This requirement defines the mandatory properties the *fugitive-emissions\_volume* "Datastream" of the *reporting facility*.

<b>Requirement 7</b>	<p>/req/datamodel/datastream/fugitive-emissions-volume-properties</p> <p>A <i>reporting facility</i> "Thing" SHALL have a <i>fugitive-emissions-volume</i> "Datastream" entity that has the properties with the corresponding value and multiplicity listed in <a href="#">Table 7</a>.</p>
----------------------	---

Table 8. Properties of a *fugitive-emissions-volume* Datastream entity

Name	Definition	Data types and values	Multiplicity and use
name	The volume of fugitive emissions (m <sup>3</sup> )	Character string type, and the value shall be "Fugitive Emissions Volume (m <sup>3</sup> )"	One
description	A short description of the Datastream	Character string type	One
observationType	The observation type of the <i>fugitive-emissions-volume</i> "Observation" is a <a href="#">ISO/OGC 19156</a> measurement	The value shall be compliant with <a href="#">OM_Measurement</a>	One
phenomenonTime	This "Datastream" SHOULD have a phenomenonTime, describes the temporal interval of the phenomenon times of all observations belonging to this Datastream	TM_Period (ISO 8601 Time Interval)	One
unitOfMeasurement	The unit of measurement of this Datastream is cubic meter	A SensorThings "unitOfMeasurement" JSON Object, with the following key-value pairs: {"uom": "m <sup>3</sup> ", "symbol": "Cubic Meter", "definition": "http://qudt.org/vocab/unit/M3"}	One

#### 7.3.4. Requirement 8

This requirement defines the direct relation between the *fugitive-emissions-volume* "Datastream" entity and other entity types.

<b>Requirement 8</b>	/req/datamodel/datastream/fugitive-emissions-volume-relations  The <i>fugitive-emissions-volume</i> "Datastream" entity SHALL have the direct relation between the "Datastream" entity and the entities listed in <a href="#">Table 8</a> .
----------------------	---

Table 9. Direct relation between a *fugitive-emissions-volume* Datastream entity and other entity types

Entity type	Relation	Description
Thing	One mandatory	Each <i>fugitive-emissions-volume</i> "Datastream" SHALL have one and only one <i>reporting facility</i> "Thing". A <i>reporting facility</i> "Thing" SHALL have one and only one <i>fugitive-emissions-volume</i> "Datastream".
Sensor	One mandatory	<p>The "Observations" in a <i>fugitive-emissions-volume</i> "Datastream" are performed by one "Sensor". One "Sensor" MAY be used by different Datastreams.</p> <p><b>Note:</b> A "Sensor" in this best practice is an observation process describing the Fugitive Emissions Management Program (FEMP) that generates the observation result.</p>
ObservedProperty	One mandatory	The "Observations" of a <i>fugitive-emissions-volume</i> "Datastream" SHALL observe the methane <i>fugitive-emissions</i> "ObservedProperty" as defined in Requirement 11.



Entity type	Relation	Description
Observation	Many optional	A <i>fugitive-emissions-volume</i> "Datastream" has zero-to-many "Observations". One Observation SHALL occur in one-and-only-one "Datastream".

### 7.3.5. Requirement 9

This requirement defines the mandatory properties of the *fugitive-emissions-mass* "Datastream" of the *reporting facility*.

<b>Requirement 9</b>	/req/datamodel/datastream/fugitive-emissions-mass-properties  A <i>reporting facility</i> "Thing" SHALL have a <i>fugitive-emissions-mass</i> "Datastream" entity that has the properties with the corresponding value and multiplicity listed in <a href="#">Table 9</a> .
----------------------	---

Table 10. Properties of a *fugitive-emissions-mass* "Datastream" entity

Name	Definition	Data types and values	Multiplicity and use
name	The mass of fugitive emissions ( <b>kg</b> )	Character string type, and the value shall be "Fugitive Emissions Mass Methane ( <b>kg</b> )"	One
description	A short description of the Datastream	Character string type	One
observationType	The observation type of the <i>fugitive-emissions-mass</i> "Observation" is a <a href="#">ISO/OGC 19156</a> measurement	The value shall be compliant with <a href="#">OM_Measurement</a>	One

Name	Definition	Data types and values	Multiplicity and use
phenomenonTime	This "Datastream" SHOULD have a phenomenonTime, describes the temporal interval of the phenomenon times of all observations belonging to this Datastream	TM_Period (ISO 8601 Time Interval)	One
unitOfMeasurement	The unit of measurement of this Datastream is kilogram	A SensorThings "unitOfMeasurement" JSON Object, with the following key-value pairs: {"uom": "kg", "symbol": "Kilogram", "definition": "http://qudt.org/vocab/unit/KiloGM"}	One

### 7.3.6. Requirement 10

This requirement defines the direct relation between the *fugitive-emissions-mass* "Datastream" entity and other entity types.

<b>Requirement 10</b>	/req/datamodel/datastream/fugitive-emissions-mass-relations  The <i>fugitive-emissions-mass</i> "Datastream" entity SHALL have the direct relation between the "Datastream" entity and the entities listed in <a href="#">Table 10</a> .
-----------------------	--

Table 11. Direct relation between a *fugitive-emissions-mass* "Datastream" entity and other entity types

Entity type	Relation	Description
Thing	One mandatory	Each <i>fugitive-emissions-mass</i> "Datastream" SHALL have one and only one <i>reporting facility</i> "Thing". A <i>reporting facility</i> "Thing" SHALL have one and only one <i>fugitive-emissions-mass</i> "Datastream".

Entity type	Relation	Description
Sensor	One mandatory	<p>The "Observations" in a <i>fugitive-emissions-mass</i> "Datastream" are performed by one "Sensor". One "Sensor" MAY be used by different Datastreams.</p> <p><b>Note:</b> A "Sensor" in this best practice is an observation process describing the Fugitive Emissions Management Program (FEMP) that generates the observation result.</p>
ObservedProperty	One mandatory	<p>The "Observations" of a <i>fugitive-emissions-mass</i> "Datastream" SHALL observe the methane <i>fugitive-emissions</i> "ObservedProperty" as defined in Requirement 11.</p>
Observation	Many optional	<p>A <i>fugitive-emissions-mass</i> "Datastream" has zero-to-many "Observations". One Observation SHALL occur in one-and-only-one "Datastream".</p>

## 7.4. Requirement Class: ObservedProperty

Requirements Class	
<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/observed-property">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/observed-property</a>	
Target type	JSON Object Instance
Dependency	<a href="http://www.opengis.net/spec/iot_sensing/1.1/req/datamodel/observed-property">http://www.opengis.net/spec/iot_sensing/1.1/req/datamodel/observed-property</a>
<b>Requirement 11</b>	<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/observed-property/properties">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/observed-property/properties</a>

### 7.4.1. Requirement 11

This requirement defines the mandatory properties of the fugitive emissions "ObservedProperty".

<b>Requirement 11</b>	<p>/req/datamodel/observed-property/properties</p> <p>The three mandatory "Datastream" entities (<i>i.e.</i>, <i>number-of-fugitive-emissions</i>, <i>fugitive-emissions-volume</i>, and <i>fugitive-emissions-mass</i>) SHALL have a related <i>fugitive-emissions</i> "ObservedProperty" entity that has properties with the corresponding value and multiplicity listed in <a href="#">Table 11</a>.</p>
-----------------------	---

Table 12. Properties of a fugitive emissions "ObservedProperty" entity

Name	Definition	Data types and values	Multiplicity and use
name	The term used in AER Directive 60 to describe fugitive emissions	Character string type, and the value shall be "Fugitive Methane Emissions"	One
description	A description about the ObservedProperty	The value shall be "Fugitive methane emissions are the unintentional releases of methane to the atmosphere."	One
definition	This property is the URI of the ObservedProperty definition. Dereferencing this URI SHOULD result in a representation of the definition of the ObservedProperty.	The value shall be "http://www.opengis.net/def/integrated-methane-sensor-web/observed-properties/fugitive-methane-emissions"	One

## 7.5. Requirement Class: Observation

Requirements Class	
<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/observation">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/observation</a>	
Target type	JSON Object Instance
Dependency	<a href="http://www.opengis.net/spec/iot_sensing/1.1/req/datamodel/observation">http://www.opengis.net/spec/iot_sensing/1.1/req/datamodel/observation</a>
<b>Requirement 12</b>	<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/observation/properties">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/observation/properties</a>

### 7.5.1. Requirement 12

This requirement defines the mandatory properties of the fugitive emissions "Observations".

<b>Requirement 12</b>	<a href="/req/datamodel/observation/properties">/req/datamodel/observation/properties</a>  The "Observations" of the three mandatory "Datastream" entity SHALL have properties with the corresponding value and multiplicity listed in <a href="#">Table 12</a> .
-----------------------	---

Table 13. Properties of a number-of-fugitive-emissions Observation entity

Name	Definition	data types and values	Multiplicity and use
phenomenonTime	The time period of when the "Observation" happens.	TM_Period (ISO 8601 Time Interval)	One
result	The <i>number-of-fugitive-emissions</i>	Integer	One
parameters	Key-value pairs describing an event-specific parameter.	The value SHALL be a JSON object, with a key of "Survey or Screening Type", and the corresponding value SHALL be one of the following: "ALTFEMP", "SITESURVEY", "TANKSURVEY", "WELLSCREENING"	One

## 7.6. Requirement Class: FeatureOfInterest

Requirements Class	
<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/feature-of-interest">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/feature-of-interest</a>	
Target type	JSON Object Instance
Dependency	<a href="http://www.opengis.net/spec/iot_sensing/1.1/req/datamodel/feature-of-interest">http://www.opengis.net/spec/iot_sensing/1.1/req/datamodel/feature-of-interest</a>
<b>Requirement 13</b>	<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/feature-of-interest/properties">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/feature-of-interest/properties</a>
<b>Requirement 14</b>	<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/feature-of-interest/relations">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/feature-of-interest/relations</a>

## 7.6.1. Requirement 13

This requirement defines the mandatory properties of the "FeatureOfInterest" entity related to the "Observations" of the three mandatory "Datastreams." In the context of fugitive emissions, the "FeatureOfInterest" of fugitive emissions "Observation" is where the leaks occur. In AER Directive 60, the "FeatureOfInterest" is modelled as a site. In some cases, a *reporting facility* called "Thing" can have more than one site, such as wells, controlled tanks, process units, or wellhead [AER Manual015 Figure 1] and [AER Manual015 Figure 3]. The following figure describes the relationship between a *reporting facility* "Thing" and "FeaturesOfInterest."

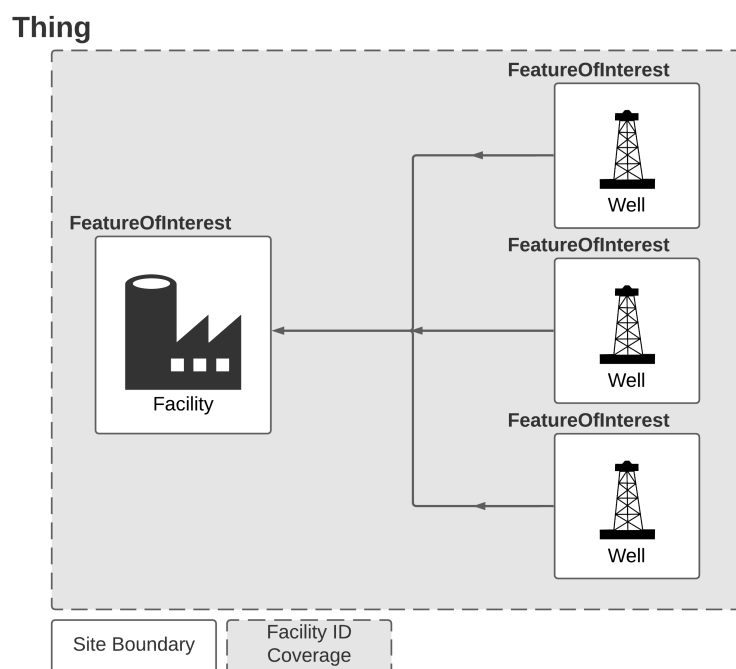


Figure 8. Thing and FeatureOfInterest Relationship

An Observation results in a value that is being assigned to a phenomenon. The phenomenon is a property of a feature, the latter being the FeatureOfInterest of the Observation [OGC and ISO 19156:2011]. In the context of this best practice, the FeatureOfInterest is the *site* and can be identified by the site's location. For example, the FeatureOfInterest of a wifi-connected thermostat can be the thermostat's location (*i.e.*, the living room where the thermostat is located). In the case of remote sensing, FeatureOfInterest can be the geographical area or volume that is being sensed.

### Requirement 13

/req/datamodel/feature-of-interest/properties

The "FeatureOfInterest" entity of the "Observations" of the three mandatory "Datastreams" SHALL have the properties with the corresponding value and multiplicity listed in Table 13.

Table 14. Properties of a FeatureOfInterest entity

Name	Definition	Data types and values	Multiplicity and use
name	The well ID or site ID that is associated with the facility ID	CharacterString, the value SHALL be a valid well or site ID	One
description	Site description	CharacterString	One
encodingType	The IANA media type for GeoJSON	Character string type, and the value shall be "application/geo+json"	One
feature	The GeoJSON polygon [RFC7946] represents the site boundary	A GeoJSON Polygon object, and the value of the GeoJSON Polygon coordinates shall be the boundary of the site or well	One

## 7.7. Requirement Class: Sensor

Requirements Class	
<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/sensor">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/sensor</a>	
Target type	JSON Object Instance
Dependency	<a href="http://www.opengis.net/spec/iot_sensing/1.1/req/datamodel/sensor">http://www.opengis.net/spec/iot_sensing/1.1/req/datamodel/sensor</a>
<b>Requirement 15</b>	<a href="http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/sensor/properties">http://www.opengis.net/spec/imsw-fm-aer60/1.0/req/datamodel/sensor/properties</a>

### 7.7.1. Requirement 14

This requirement defines the mandatory properties of the "Sensor" entity.

#### NOTE

The "Sensor" entity in this best practice is not an instrument, but rather it SHALL be an observation process [ISO/OGC 19156:2001 OM\\_Process](#) described the Fugitive Emissions Management Program (FEMP) that generates the observation result.

<b>Requirement 14</b>	<p>/req/datamodel/sensor/properties</p> <p>A "Sensor" in this best practice is an observation process describing the Fugitive Emissions Management Program (FEMP) that generates the observation result.</p> <p>The "Sensor" SHALL have the properties with the corresponding value and multiplicity listed in <a href="#">Table 14</a>.</p>
-----------------------	--

Table 15. Properties of a Sensor entity

Name	Definition	Data types and values	Multiplicity and use
name	Provides a label for the "Sensor" entity, and it should be the descriptive name of the FEMP that generates the fugitive emissions observation results	CharacterString	One
description	The description of the FEMP	CharacterString	One
encodingType	The encoding type of the metadata property.	Character string type, and the value shall be "application/pdf" or "text/html"	One
metadata	This value depends on the value of the encodingType. The value SHALL be a resolvable URI, linking to either a PDF document or an HTML page, describing the FEMP used to generate the fugitive emissions observation results.	The value SHALL be a resolvable URI.	One



# Annex A: Conformance Class Abstract Test Suite (Normative)

This section contains the conformance classes for the OGC Integrated Methane Sensor Web for Emissions Management Best Practice - Part I - Fugitive Emissions Management based on AER Directive 60. An SensorThings API service, that is compliant to this BP, needs to pass all the conformance tests defined in this section as well as the [OGC SensorThings API Part 1: Sensing Version 1.1](#) Conformance Class Abstract Test Suit.

## A.1. Conformance Class: Thing

<b>Conformance Class</b>	/conf/datamodel/thing	
<b>Requirements</b>	/req/datamodel/thing/properties	
	/req/datamodel/thing/relations	
<b>Dependency</b>	<a href="http://www.opengis.net/spec/iot_sensing/1.1/conf/datamodel/thing">http://www.opengis.net/spec/iot_sensing/1.1/conf/datamodel/thing</a>	
<b>Test 1</b>	/conf/datamodel/thing/properties	
	Requirement	/req/datamodel/thing/properties
	Test purpose	Verify that the Thing entity has mandatory properties as defined in this BP Specification.
	Test method	Inspect the entire JSON object of the Thing entity set to identify if each entity has the mandatory properties defined in the corresponding requirement. Pass if no errors are reported. Fail otherwise.
	Test type	Conformance

<b>Test 2</b>	/conf/datamodel/thing/relations	
	Requirement	/req/datamodel/thing/relations
	Test purpose	Verify that the Thing entity has mandatory relations as defined in this BP Specification.
	Test method	Inspect the entire JSON object of each Thing entity set to identify if each entity has the mandatory relations defined in the corresponding requirement. Pass if no errors are reported. Fail otherwise.
	Test type	Conformance

## A.2. Conformance Class: Location

<b>Conformance Class</b>	/conf/datamodel/location	
<b>Requirements</b>	/req/datamodel/location/properties	
	/req/datamodel/location/relations	
<b>Dependency</b>	<a href="http://www.opengis.net/spec/iot_sensing/1.1/conf/datamodel/location">http://www.opengis.net/spec/iot_sensing/1.1/conf/datamodel/location</a>	
<b>Test 3</b>	/conf/datamodel/location/properties	
	Requirement	/req/datamodel/location/properties
	Test purpose	Verify that the Location entity has the mandatory properties as defined in this BP Specification.
	Test method	Inspect the full JSON object of the Location entity set to identify if each entity has the mandatory properties defined in the corresponding requirement. Pass if no errors are reported. Fail otherwise.
	Test type	Conformance

<b>Test 4</b>	/conf/datamodel/location/relations	
	Requirement	/req/datamodel/location/relations
	Test purpose	Verify that the Location entity has the mandatory relations as defined in this BP Specification.
	Test method	Inspect the full JSON object of each Location entity set to identify if each entity has the mandatory relations defined in the corresponding requirement. Pass if no errors are reported. Fail otherwise.
	Test type	Conformance

### A.3. Conformance Class: Datastream

<b>Conformance Class</b>	/conf/datamodel/datastream
<b>Requirements</b>	/req/datamodel/datastream/number-of-fugitive-emissions-properties
	/req/datamodel/datastream/number-of-fugitive-emissions-relations
	/req/datamodel/datastream/fugitive-emissions-volume-properties
	/req/datamodel/datastream/fugitive-emissions-volume-relations
	/req/datamodel/datastream/fugitive-emissions-mass-properties
	/req/datamodel/datastream/fugitive-emissions-mass-relations
<b>Dependency</b>	<a href="http://www.opengis.net/spec/iot_sensing/1.1/conf/datamodel/datastream">http://www.opengis.net/spec/iot_sensing/1.1/conf/datamodel/datastream</a>

<b>Test 5</b>	/conf/datamodel/datastream/number-of-fugitive-emissions-properties	
	Requirement	/req/datamodel/datastream/number-of-fugitive-emissions-properties
	Test purpose	Verify that each <i>number-of-fugitive-emissions</i> Datastream entity has the mandatory properties as defined in this BP Specification.
	Test method	Inspect the full JSON object of the <i>number-of-fugitive-emissions</i> Datastream entity set to identify if each entity has the mandatory properties defined in the corresponding requirement. Pass if no errors are reported. Fail otherwise.
	Test type	Conformance
<b>Test 6</b>	/conf/datamodel/datastream/number-of-fugitive-emissions-relations	
	Requirement	/req/datamodel/datastream/number-of-fugitive-emissions-relations
	Test purpose	Verify that each <i>number-of-fugitive-emissions</i> Datastream entity has the mandatory relations as defined in this BP Specification.
	Test method	Inspect the full JSON object of each <i>number-of-fugitive-emissions</i> Datastream entity set to identify if each entity has the mandatory relations defined in the corresponding requirement. Pass if no errors are reported. Fail otherwise.
	Test type	Conformance

<b>Test 7</b>	/conf/datamodel/datastream/fugitive-emissions-volume-properties	
	Requirement	/req/datamodel/datastream/fugitive-emissions-volume-properties
	Test purpose	Verify that each <i>fugitive-emissions-volume</i> Datastream entity has the mandatory properties as defined in this BP Specification.
	Test method	Inspect the full JSON object of the <i>fugitive-emissions-volume</i> Datastream entity set to identify if each entity has the mandatory properties defined in the corresponding requirement. Pass if no errors are reported. Fail otherwise.
	Test type	Conformance
<b>Test 8</b>	/conf/datamodel/datastream/fugitive-emissions-volume-relations	
	Requirement	/req/datamodel/datastream/fugitive-emissions-volume-relations
	Test purpose	Verify that each <i>fugitive-emissions-volume</i> Datastream entity has the mandatory relations as defined in this BP Specification.
	Test method	Inspect the full JSON object of each <i>fugitive-emissions-volume</i> Datastream entity set to identify if each entity has the mandatory relations defined in the corresponding requirement. Pass if no errors are reported. Fail otherwise.
	Test type	Conformance

<b>Test 9</b>	/conf/datamodel/datastream/fugitive-emissions-mass-properties	
	Requirement	/req/datamodel/datastream/fugitive-emissions-mass-properties
	Test purpose	Verify that each <i>fugitive-emissions-mass</i> Datastream entity has the mandatory properties as defined in this BP Specification.
	Test method	Inspect the full JSON object of the <i>fugitive-emissions-mass</i> Datastream entity set to identify if each entity has the mandatory properties defined in the corresponding requirement. Pass if no errors are reported. Fail otherwise.
	Test type	Conformance
<b>Test 10</b>	/conf/datamodel/datastream/fugitive-emissions-mass-relations	
	Requirement	/req/datamodel/datastream/fugitive-emissions-mass-relations
	Test purpose	Verify that each <i>fugitive-emissions-mass</i> Datastream entity has the mandatory relations as defined in this BP Specification.
	Test method	Inspect the full JSON object of each <i>fugitive-emissions-mass</i> Datastream entity set to identify if each entity has the mandatory relations defined in the corresponding requirement. Pass if no errors are reported. Fail otherwise.
	Test type	Conformance

## A.4. Conformance Class: ObservedProperty

<b>Conformance Class</b>	/conf/datamodel/observed-property
<b>Requirements</b>	/req/datamodel/observed-property/properties
<b>Dependency</b>	<a href="http://www.opengis.net/spec/iot_sensing/1.1/conf/datamodel/observed-property">http://www.opengis.net/spec/iot_sensing/1.1/conf/datamodel/observed-property</a>

<b>Test 11</b>	/conf/datamodel/observed-property/properties	
	Requirement	/req/datamodel/observed-property/properties
	Test purpose	Verify that the ObservedProperty entity has the mandatory properties as defined in this BP Specification.
	Test method	Inspect the full JSON object of the ObservedProperty entity set to identify if each entity has the mandatory properties defined in the corresponding requirement. Pass if no errors are reported. Fail otherwise.
	Test type	Conformance

## A.5. Conformance Class: Observation

<b>Conformance Class</b>	/conf/datamodel/observation	
<b>Requirements</b>	/req/datamodel/observation/properties	
<b>Dependency</b>	<a href="http://www.opengis.net/spec/iot_sensing/1.1/conf/datamodel/observation">http://www.opengis.net/spec/iot_sensing/1.1/conf/datamodel/observation</a>	
<b>Test 12</b>	/conf/datamodel/observation/properties	
	Requirement	/req/datamodel/observation/properties
	Test purpose	Verify that the Observation entity has the mandatory properties as defined in this BP Specification.
	Test method	Inspect the full JSON object of the Observation entity set to identify if each entity has the mandatory properties defined in the corresponding requirement. Pass if no errors are reported. Fail otherwise.
	Test type	Conformance

## A.6. Conformance Class: FeatureOfInterest

<b>Conformance Class</b>	/conf/datamodel/feature-of-interest	
--------------------------	-------------------------------------	--

<b>Requirements</b>	/req/datamodel/feature-of-interest/properties	
<b>Dependency</b>	<a href="http://www.opengis.net/spec/iot_sensing/1.1/conf/datamodel/feature-of-interest">http://www.opengis.net/spec/iot_sensing/1.1/conf/datamodel/feature-of-interest</a>	
<b>Test 13</b>	/conf/datamodel/feature-of-interest/properties	
	Requirement	/req/datamodel/feature-of-interest/properties
	Test purpose	Verify that the FeatureOfInterest entity has the mandatory properties as defined in this BP Specification.
	Test method	Inspect the full JSON object of the FeatureOfInterest entity set to identify if each entity has the mandatory properties defined in the corresponding requirement. Pass if no errors are reported. Fail otherwise.
	Test type	Conformance

## A.7. Conformance Class: Sensor

<b>Conformance Class</b>	/conf/datamodel/sensor	
<b>Requirements</b>	/req/datamodel/sensor/properties	
<b>Dependency</b>	<a href="http://www.opengis.net/spec/iot_sensing/1.1/conf/datamodel/sensor">http://www.opengis.net/spec/iot_sensing/1.1/conf/datamodel/sensor</a>	
<b>Test 14</b>	/conf/datamodel/sensor/properties	
	Requirement	/req/datamodel/sensor/properties
	Test purpose	Verify that the Sensor entity has the mandatory properties as defined in this BP Specification.
	Test method	Inspect the full JSON object of the Sensor entity set to identify if each entity has the mandatory properties defined in the corresponding requirement. Pass if no errors are reported. Fail otherwise.
	Test type	Conformance



# Annex B: Title ( {Normative/Informative} )

## NOTE

Place other Annex material in sequential annexes beginning with "B" and leave final two annexes for the Revision History and Bibliography

## Annex C: Revision History

Date	Release	Editor	Primary clauses modified	Description
2021-11-19	0.1	Steve Liang	all	initial version

# Annex D: Bibliography

*Example Bibliography (Delete this note).*

The TC has approved Springer LNCS as the official document citation type.

Springer LNCS is widely used in technical and computer science journals and other publications

## NOTE

- For citations in the text please use square brackets and consecutive numbers: [1], [2], [3]

– Actual References:

[n] Journal: Author Surname, A.: Title. Publication Title. Volume number, Issue number, Pages Used (Year Published)

[n] Web: Author Surname, A.: Title, <http://Website-Url>

[1] OGC: OGC Testbed 12 Annex B: Architecture. (2015).

[1] <https://static.aer.ca/prd/documents/directives/Directive060.pdf>

1. Atherton, E., Risk, D., Fougère, C., Lavoie, M., Marshall, A., Werring, J., Williams, J. P., and Minions, C. 2017. "Mobile measurement of methane emissions from natural gas developments in northeastern British Columbia, Canada", Atmos. Chem. Phys., 17, 12405–12420, <https://doi.org/10.5194/acp-17-12405-2017>.
2. [BC Oil and Gas Commission - Oil & Gas Glossary and Definitions VERSION 1.11 \(2020\)](#)
3. [Canada's methane regulations \(2018\)](#)
4. CONLEYG, S., FRANCOI, G., FALONAD, I., R. BLAKEJ. PEISCHLAND T. B. 2016. "Methane emissions from the 2015 Aliso Canyon blowout in Los Angeles, CA", SCIENCE, Vol 351, Issue 6279, pp. 1317-1320

Halley L. Brantley, Eben D. Thoma, William C. Squier, Birnur B. Guven, and David Lyon. (2014). "Assessment of Methane Emissions from Oil and Gas Production Pads using Mobile Measurements" Environmental Science & Technology 2014 48 (24), 14508-14515

1. [IPCC- AR4 Climate Change \(2007\)](#)
2. JohnsonDavid, R., R.TynerAlexander J.Szekeres. (2021). "Blinded evaluation of airborne methane source detection using Bridger Photonics LiDAR" Energy & Emissions Research Laboratory, Department of Mechanical and Aerospace Engineering, Carleton University, Ottawa, ON K1S 5B6, Canada
3. [Method 21 - Volatile Organic Compound Leaks \(2021\)](#)
4. [National Academies of Sciences, Engineering, and Medicine- Improving Characterization of Anthropogenic Methane Emissions in the United States \(2018\)](#)

5. OGC: OGC 15-078r6, OGC SensorThings API Part 1: Sensing (2016)
6. OGC Sensor Web Enablement (SWE)
7. Regulations Respecting Reduction in the Release of Methane and Certain Volatile Organic Compounds (2018)
8. Tahani A., Manh-Kien Tran, Reid Vrolyk, Michael Pope, and Michael Fowler. 2020. "A Review of Methane Gas Detection Sensors: Recent Developments and Future Perspectives" *Inventions* 5, no. 3: 28. <https://doi.org/10.3390/inventions5030028>
9. Varon D. J., Daniel J. Jacob, Dylan Jervis, and Jason McKeever. (2020). "Quantifying Time-Averaged Methane Emissions from Individual Coal Mine Vents with GHGSat-D Satellite Observations", *Environmental Science & Technology* 2020 54 (16), 10246-10253
10. Zimmerle D., Timothy Vaughn, Clay Bell, Kristine Bennett, Parik Deshmukh, and Eben Thomas. 2020. "Detection Limits of Optical Gas Imaging for Natural Gas Leak Detection in Realistic Controlled Conditions" *Environmental Science & Technology* 2020 54 (18), 11506-11514