


Data owner

holds the genomic fragment and secret key · no GPU

Compute provider

holds the model · encrypted activations only · one A100

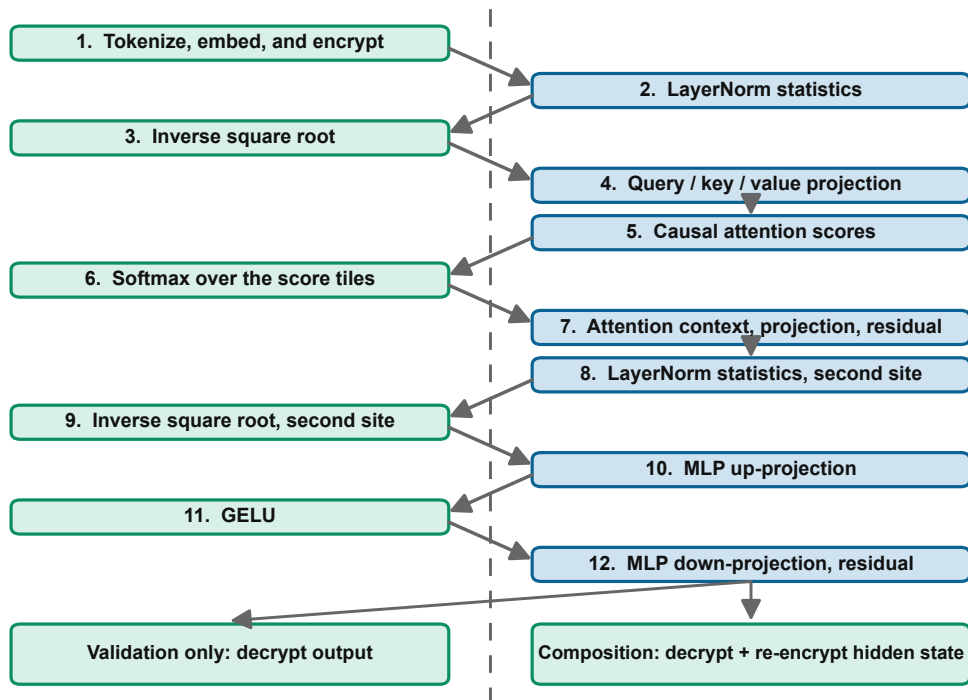

Only ciphertexts cross the in-process role boundary; fresh encryption resets level to 0.