


Stage flushing bounds host memory

Standalone-block samples; target-process resident set.

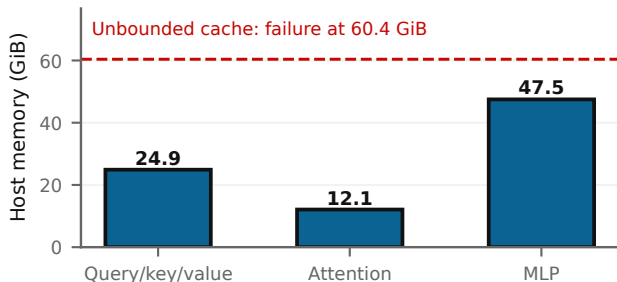

Stage peaks are sampled, not allocation-by-allocation maxima.