


Data owner

holds the genomic fragment and secret key · no GPU

Compute provider

holds the model · encrypted activations only · one A100

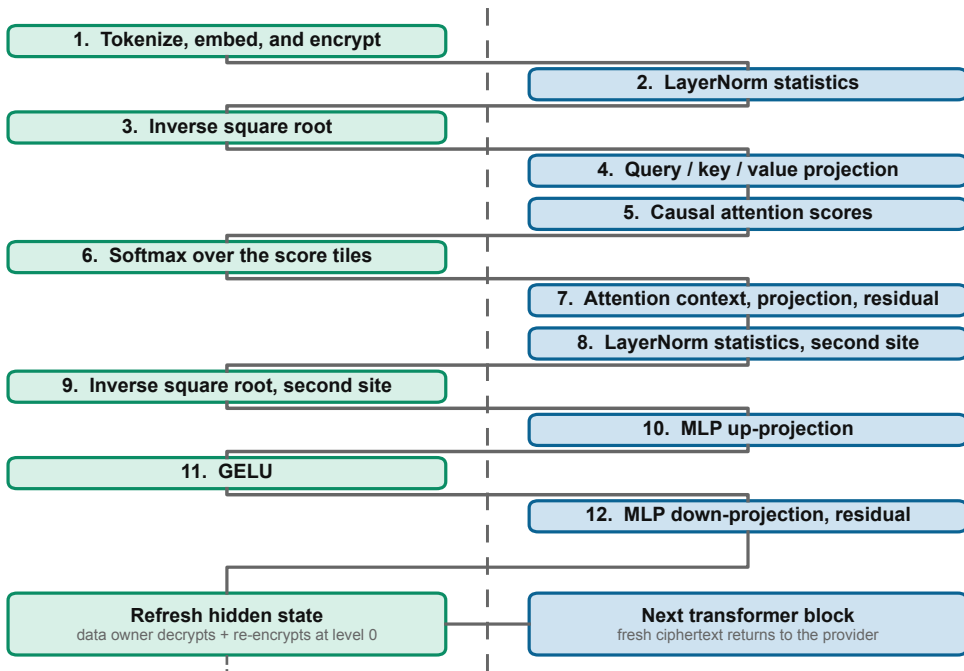

validation only: decrypt the final output

Fresh encryption resets the CKKS depth budget; no homomorphic bootstrapping is used.