How a Point Track Becomes a Token

Track MLP: one small network, reused for every point

1 Follow one point

The same point at 16 times




2 Describe its history



8 values per frame

Pack the frames in time order

3 Learn a track token

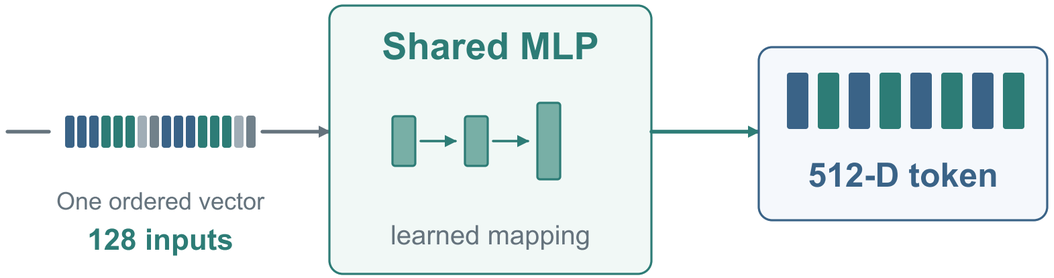

A learned description of this point's whole history

Repeat independently for every tracked point

One set of weights

One token per point



Schematic point paths and token values. The MLP encodes each history; ACT fusion uses the resulting tokens.