

Experiment 01: Foundation Installation

For windows platform we'll install Chocolatey, Kind, and Docker Desktop. Kind will automatically install Docker Desktop

Open a Powershell window with "Run as Administrator"

For installing Docker Desktop & KIND we must have your execution policy set to bypass or something even less restrictive.

```
PS C:\Users\kubelord> Get-ExecutionPolicy
```

Bypass

NOTE: If the response comes back with Restricted d you will need to execute the execute policy update noted below

```
PS C:\Users\kubelord> Set-ExecutionPolicy Bypass
```

Execution Policy Change

The execution policy helps protect you from scripts that you do not trust. Changing the execution policy might expose

you to the security risks described in the about_Execution_Policies help topic at <https://go.microsoft.com/fwlink/?LinkID=135170>. Do you want to change the execution policy?

[Y] Yes [A] Yes to All [N] No [L] No to All [S] Suspend [?] Help (default is "N"): **A**

Set-ExecutionPolicy : Access to the registry key 'HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\PowerShell\1\ShellIds\Microsoft.PowerShell' is denied. To change the execution policy for the default (LocalMachine) scope, start Windows PowerShell with the "Run as administrator" option. To

change the execution policy for the current user, run "Set-ExecutionPolicy -Scope CurrentUser".

At line:1 char:1

+ Set-ExecutionPolicy Bypass

+ ~~~~~

+ CategoryInfo : PermissionDenied: (:) [Set-ExecutionPolicy], UnauthorizedAccessException

+ FullyQualifiedErrorId : System.UnauthorizedAccessException,Microsoft.PowerShell.Commands.SetExecutionPolicyCommand

nd

```
PS C:\Users\kubelord> Get-ExecutionPolicy
```

Bypass

Install Chocolatey, a Windows Package Manager. Now that we've confirmed or updated and confirmed our execution policy is correct.

```
PS C:\Users\kubelord> Set-ExecutionPolicy Bypass -Scope Process -Force;  
[System.Net.ServicePointManager]::SecurityProtocol =
```

```
[System.Net.ServicePointManager]::SecurityProtocol -bor 3072; iex ((New-Object System.Net.WebClient).DownloadString('https://chocolatey.org/install.ps1'))
```

Creating ChocolateyInstall as an environment variable (targeting 'User')

Setting ChocolateyInstall to 'C:\ProgramData\chocolatey'

WARNING: It's very likely you will need to close and reopen your shell
before you can use choco.

```
PS C:\Users\kubelord > choco /?
```

If the above does not return the help for Chocolatey, then close the Powershell prompt and open another one.

```
PS C:\Users\kubelord> choco install kind
```

Chocolatey v0.10.15

Installing the following packages:

kind

By installing you accept licenses for the packages.

Progress: Downloading docker-desktop 2.3.0.4... 100%

Progress: Downloading kind 0.8.1... 100%

docker-desktop v2.3.0.4 [Approved]

...

The install of docker-desktop was successful.

Software installed to 'C:\Program Files\Docker\Docker'

kind v0.8.1 [Approved]

kind package files install completed. Performing other installation steps.


...

The install of kind was successful.

...

```
PS C:\Windows\system32>
```

You can also install manually. If you were going to install manually, load the following URL in a web browser '<https://github.com/kubernetes-sigs/kind/releases/download/v0.8.1/kind-windows-amd64>' for the Windows binary for other platforms view <https://kind.sigs.k8s.io/docs/user/quick-start/>

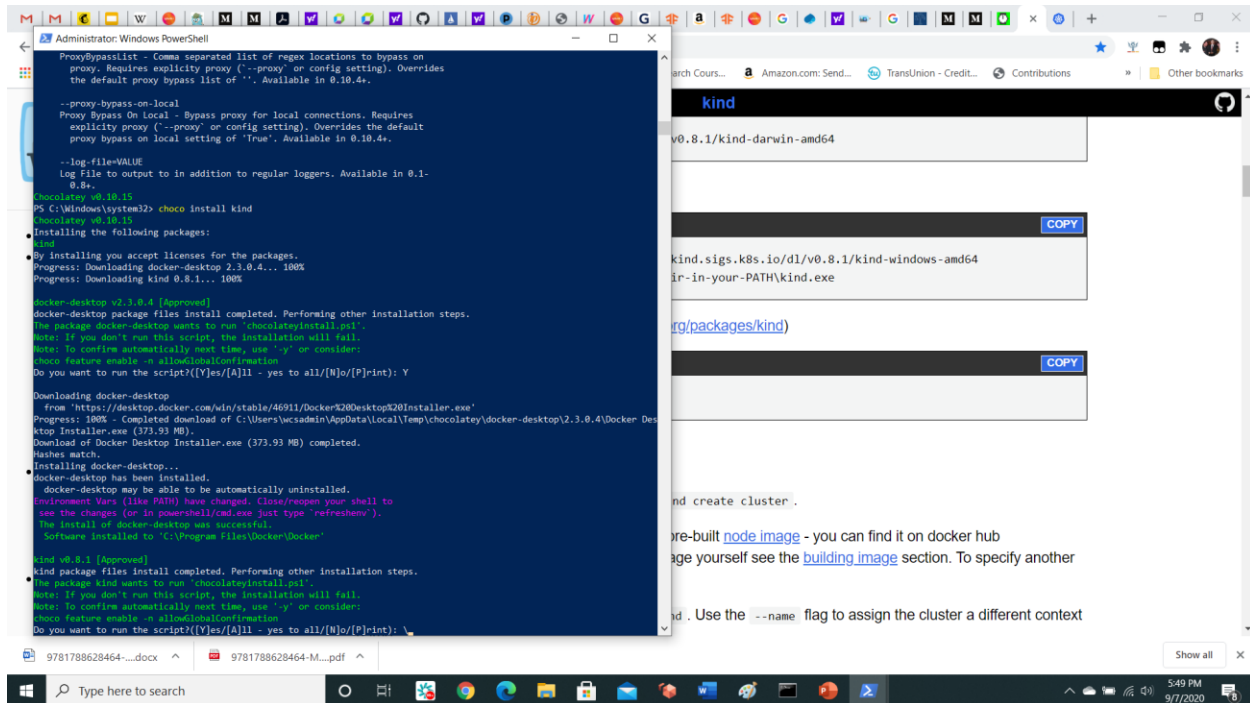

```
Administrator: Windows PowerShell

ProxyBypassList - Comma separated list of regex locations to bypass on
proxy. Requires explicitly proxy ('--proxy' or config setting). Overrides
the default proxy bypass list of ''. Available in 0.10.4+.

--proxy-bypass-on-local
Proxy Bypass On Local - Bypass proxy for local connections. Requires
explicitly proxy ('--proxy' or config setting). Overrides the default
proxy bypass on local setting of 'True'. Available in 0.10.4+.

--log-file=VALUE
Log File to output to in addition to regular loggers. Available in 0.1-
0.8+.

Chocolatey v0.10.15
PS C:\Windows\system32> choco install kind
Chocolatey v0.10.15
Installing the following packages:
kind
By installing you accept licenses for the packages.
Progress: Downloading docker-desktop 2.3.0.4... 100%
Progress: Downloading kind 0.8.1... 100%

docker-desktop v2.3.0.4 [Approved]
docker-desktop package files install completed. Performing other installation steps.
The package docker-desktop wants to run 'chocolateyinstall.ps1'.
Note: If you don't run this script, the installation will fail.
Note: To confirm automatically next time, use '-y' or consider:
choco feature enable -n allowGlobalConfirmation
Do you want to run the script?([Y]es/[A]ll - yes to all/[N]o/[P]rint): Y

Downloading docker-desktop
  from 'https://desktop.docker.com/win/stable/46911/Docker%20Desktop%20Installer.exe'
Progress: 100% - Completed download of C:\Users\wcsadmin\AppData\Local\Temp\chocolatey\docker-desktop\2.3.0.4\Docker Des
ktop Installer.exe (373.93 MB).
Download of Docker Desktop Installer.exe (373.93 MB) completed.
Hashes match.
Installing docker-desktop...
docker-desktop has been installed.
  docker-desktop may be able to be automatically uninstalled.
Environment Vars (like PATH) have changed. Close/reopen your shell to
see the changes (or in powershell/cmd.exe just type 'refreshenv').
The install of docker-desktop was successful.
  Software installed to 'C:\Program Files\Docker\Docker'

kind v0.8.1 [Approved]
kind package files install completed. Performing other installation steps.
The package kind wants to run 'chocolateyinstall.ps1'.
Note: If you don't run this script, the installation will fail.
Note: To confirm automatically next time, use '-y' or consider:
choco feature enable -n allowGlobalConfirmation
Do you want to run the script?([Y]es/[A]ll - yes to all/[N]o/[P]rint): \
```

```
docker ps -a --filter label=io.x-k8s.kind.cluster=kind --format '{{.Names}}'
```

```
Administrator: Windows PowerShell

Chocolatey v0.10.15
Installing the following packages:
kind
By installing you accept licenses for the packages.
Progress: Downloading docker-desktop 2.3.0.4... 100%
Progress: Downloading kind 0.8.1... 100%

docker-desktop v2.3.0.4 [Approved]
docker-desktop package files install completed. Performing other installation steps.
The package docker-desktop wants to run 'chocolateyinstall.ps1'.
Note: If you don't run this script, the installation will fail.
Note: To confirm automatically next time, use '-y' or consider:
choco feature enable -n allowGlobalConfirmation
Do you want to run the script?([Y]es/[A]ll - yes to all/[N]o/[P]rint): Y

Downloading docker-desktop
  from 'https://desktop.docker.com/win/stable/46911/Docker%20Desktop%20Installer.exe'
Progress: 100% - Completed download of C:\Users\wcsadmin\AppData\Local\Temp\chocolatey\docker-desktop\2.3.0.4\Docker Desktop Installer.exe (373.93 MB).
Download of Docker Desktop Installer.exe (373.93 MB) completed.
Hashes match.
Installing docker-desktop...
docker-desktop has been installed.
  docker-desktop may be able to be automatically uninstalled.
Environment Vars (like PATH) have changed. Close/reopen your shell to
see the changes (or in powershell/cmd.exe just type 'refreshenv').
The install of docker-desktop was successful.
  Software installed to 'C:\Program Files\Docker\Docker'

kind v0.8.1 [Approved]
kind package files install completed. Performing other installation steps.
The package kind wants to run 'chocolateyinstall.ps1'.
Note: If you don't run this script, the installation will fail.
Note: To confirm automatically next time, use '-y' or consider:
choco feature enable -n allowGlobalConfirmation
Do you want to run the script?([Y]es/[A]ll - yes to all/[N]o/[P]rint): Y


Downloading kind 64 bit
  from 'https://github.com/kubernetes-sigs/kind/releases/download/v0.8.1/kind-windows-amd64'
Progress: 100% - Completed download of C:\ProgramData\chocolatey\lib\kind\kind.exe (9.32 MB).
Download of kind.exe (9.32 MB) completed.
Hashes match.
ShimGen has successfully created a shim for kind.exe
The install of kind was successful.
  Software install location not explicitly set, could be in package or
  default install location if installer.


Chocolatey installed 2/2 packages.
See the log for details (C:\ProgramData\chocolatey\logs\chocolatey.log).
PS C:\Windows\system32>
```

If you don't see the little Docker whale in the system tray, you will have to restart your Windows VM or machine




After restart or if you have the docker whale in your system tray, we can open the dashboard. When you start Windows you should see notification from your System Tray that Docker for Hyper-V backend is starting and then in the system tray you should see our favorite containerized whale.

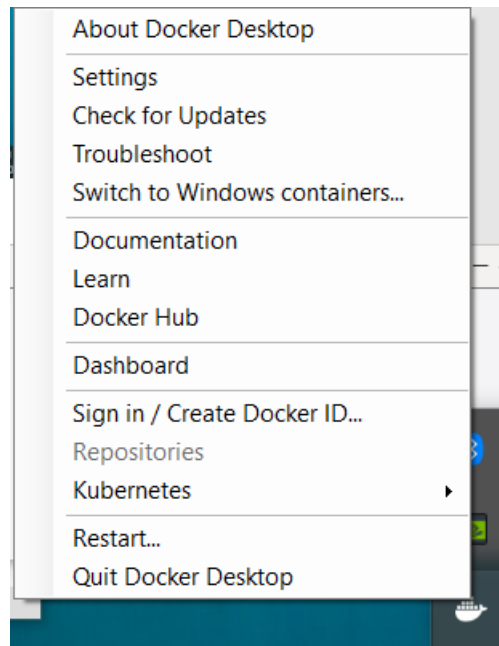

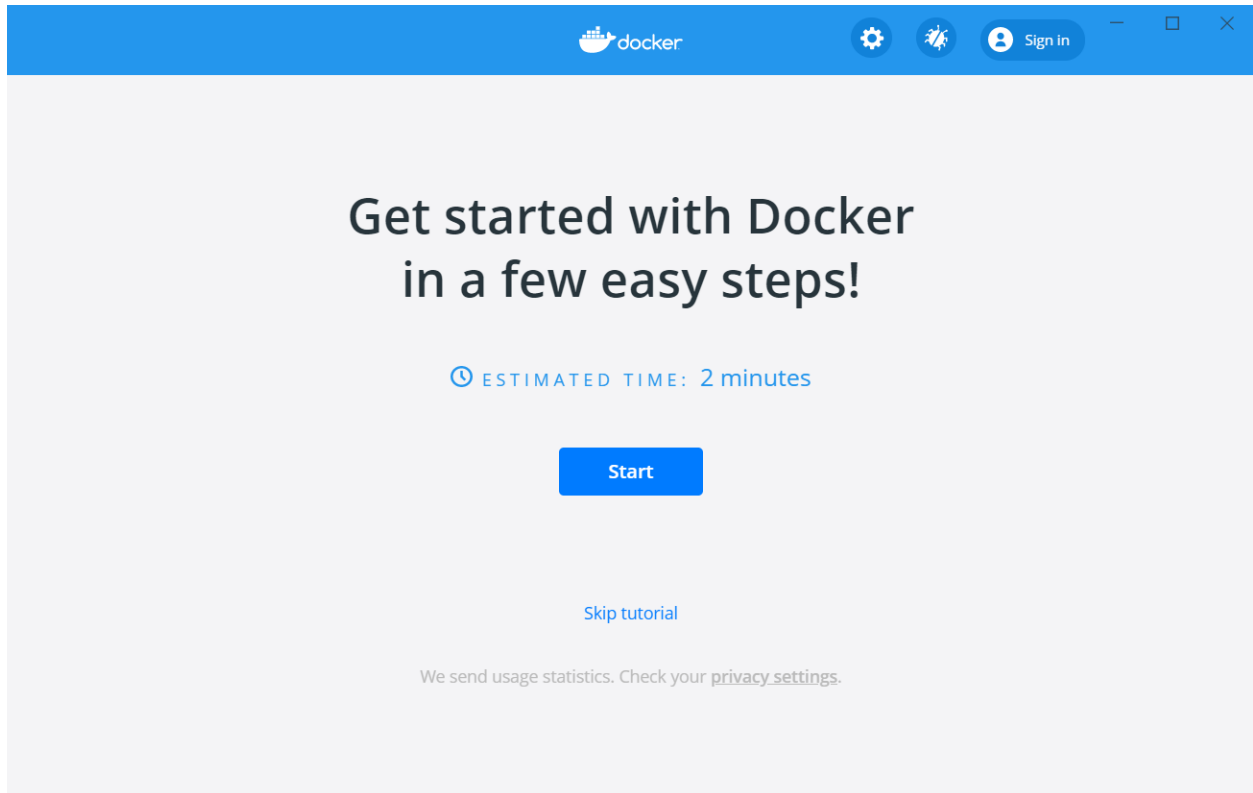

Take the tour, if this is your first time, or you're reinstalling. It's quick and painless.

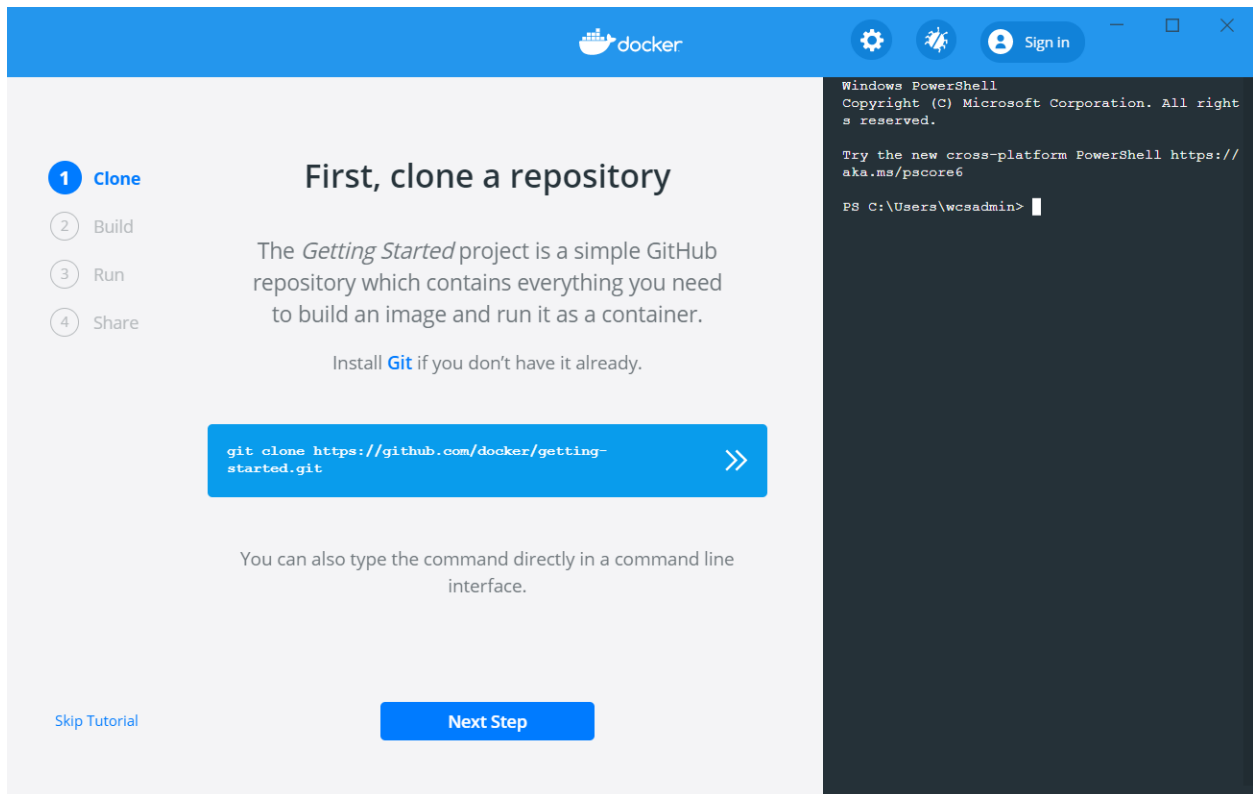

If you have Git installed, which is necessary for the class continue to click the Command Button and it will be pasted automatically (like Katacoda) into the Powershell window and clone the repo for the docker getting started.

The next step is to change to the folder with the repo we just cloned and build a docker container


```
PS C:\Users\kubelord> cd getting-started
```

```
PS C:\Users\kubelord> docker build -t docker101tutorial .
```

The screenshot shows the Docker Desktop application window. On the left, a sidebar contains a progress indicator with four steps: 1. Clone (checked), 2. Build (active), 3. Run, and 4. Share. The main content area is titled 'Now, build the image' and includes a sub-header 'A Docker image is a private file system just for your container. It provides all the files and code your container needs.' Below this, there is a blue button with the text 'cd getting-started' and 'docker build -t docker101tutorial .' followed by a double arrow icon. At the bottom left, there is a 'Skip Tutorial' link, and at the bottom right, there is a 'Next Step' button. On the right side of the window, a terminal window displays the output of the 'docker build' command. The output shows the removal of intermediate containers, the pulling of the 'nginx:alpine' image, and the successful building and tagging of the 'docker101tutorial:latest' image. A security warning is also present, advising that the build is being performed from Windows against a non-Windows Docker host.

```
Removing intermediate container a33bdcfa6b99
--> 77a2c7cad879
Step 16/21 : FROM base AS build
--> 4e5eddf7c60b
Step 18/21 : RUN mkdocs build
INFO     - Cleaning site directory
INFO     - Building documentation to directory
: /app/site
INFO     - The following pages exist in the do
cs directory, but are not included in the "nav
" configuration:
- index.md
Removing intermediate container 18e231fa0330
--> d8e558400369
Step 19/21 : FROM nginx:alpine
alpine: Pulling from library/nginx
df20fa9351a1: Already exists
3db268b1fe8f: Pull complete
f682f0660e7a: Pull complete
7eb0e8838bc0: Pull complete
e8bf1226cc17: Pull complete
Digest: sha256:a97eb9ecc708c8aa715ccfb5e9338f5
456e4b65575daf304f108301f3b497314
Status: Downloaded newer image for nginx:alpin
e
--> 6f715d38cfe0
Step 20/21 : COPY --from=app-zip-creator /app.
zip /usr/share/nginx/html/assets/app.zip
--> 6ee3ec6870e5
Step 21/21 : COPY --from=build /app/site /usr/
share/nginx/html
--> 88c2c625cb70
Successfully built 88c2c625cb70
Successfully tagged docker101tutorial:latest
SECURITY WARNING: You are building a Docker im
age from Windows against a non-Windows Docker
host. All files and directories added to build
context will have '-rwxr-xr-x' permissions. I
t is recommended to double check and reset per
missions for sensitive files and directories.
PS C:\Users\wcsadmin\getting-started>
```


```
PS C:\Users\kubelord\getting-started> docker run -d -p 80:80 --name docker-tutorial
docker101tutorial
```

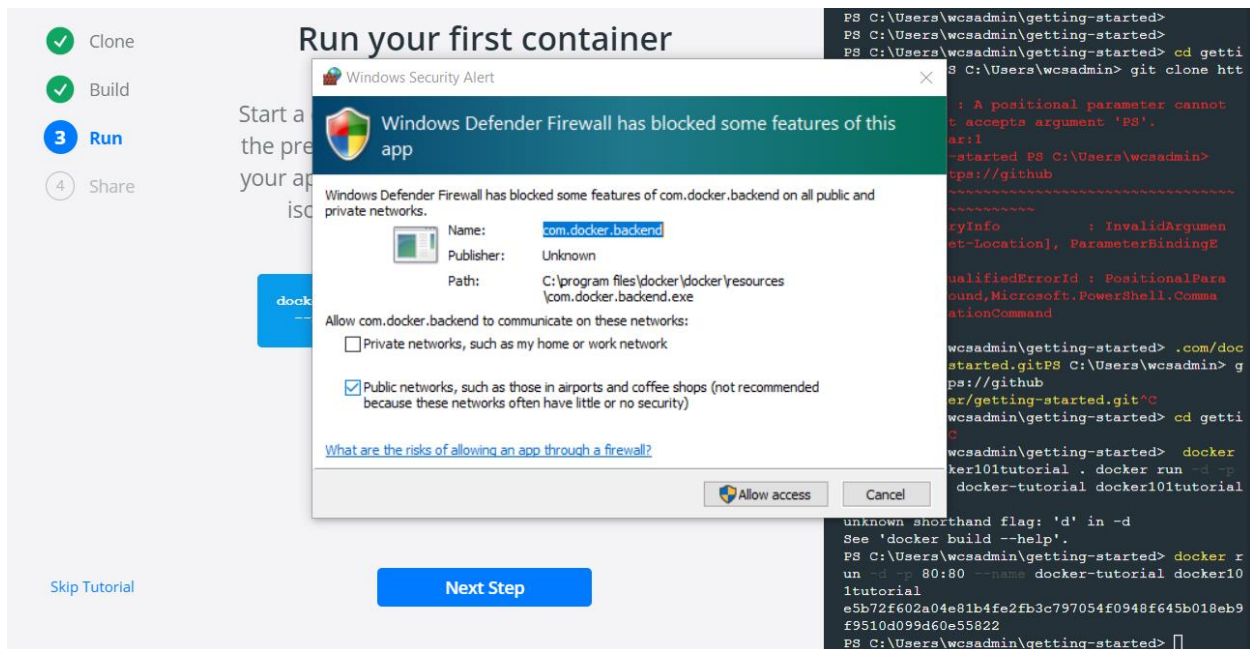Click **“Allow access”** to allow your container to be run

We should see the ID for our container returned. It will look similar to below

e5b72f602a04e81b4fe2fb3c797054f0948f645b018eb9f9510d099d60e55822

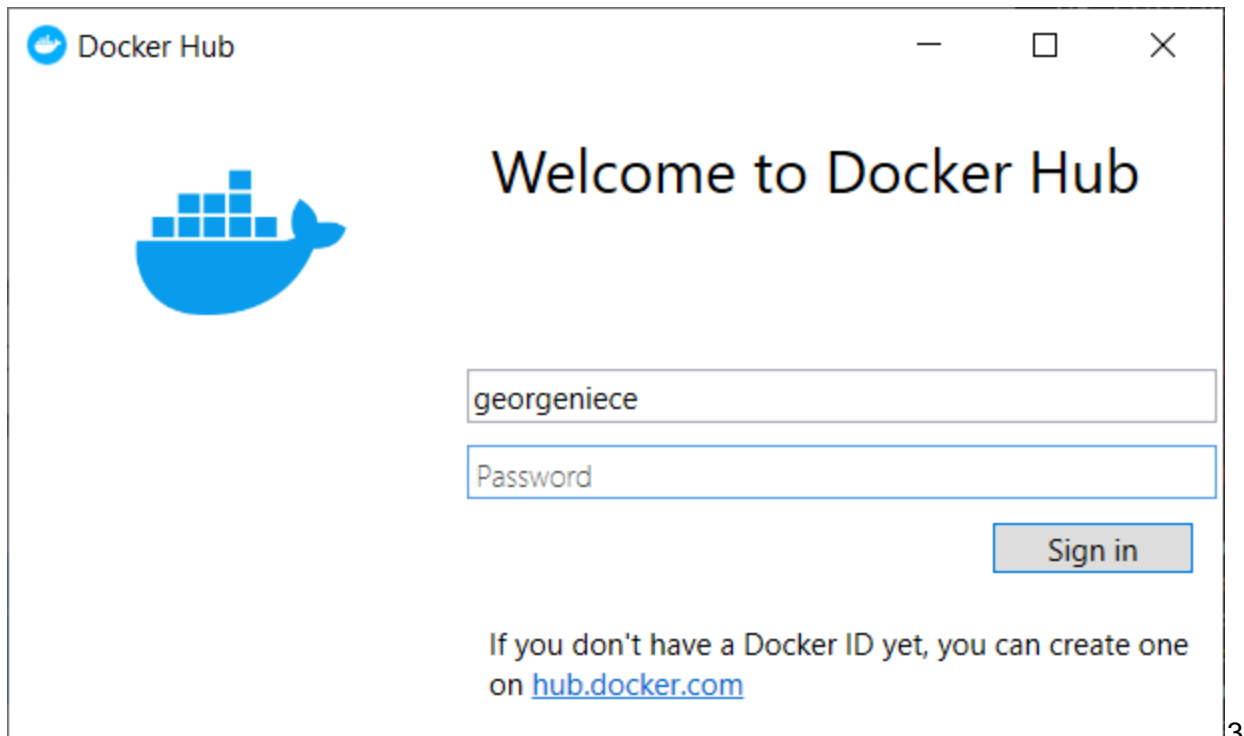

That will update the screen for the next step in the quick start tutorial

✓ Clone

✓ Build

✓ Run

4 Share

Now save and share your image

Save and share your image on Docker Hub to enable other users to easily download and run the image on any destination machine.

```
docker tag docker101tutorial georgeniece/docker101tutorial
docker push georgeniece/docker101tutorial
```

>>

Click [here](#) to see the image you shared on Docker Hub.

Skip TutorialDone

```
host. All files and directories added to build
context will have '-rwxr-xr-x' permissions. I
t is recommended to double check and reset per
missions for sensitive files and directories.
PS C:\Users\wcsadmin\getting-started>
PS C:\Users\wcsadmin\getting-started>
PS C:\Users\wcsadmin\getting-started> cd getti
ng-started PS C:\Users\wcsadmin> git clone htt
ps://github
Set-Location : A positional parameter cannot
be found that accepts argument 'PS'.
At line:1 char:1
+ cd getting-started PS C:\Users\wcsadmin>
git clone https://github
+ ~~~~~
+ CategoryInfo          : InvalidArgument
t: (:) [Set-Location], ParameterBindingE
xception
+ FullyQualifiedErrorId : PositionalPara
meterNotFound,Microsoft.PowerShell.Comma
nds.SetLocationCommand

PS C:\Users\wcsadmin\getting-started> .com/doc
ker/getting-started.gitPS C:\Users\wcsadmin> g
it clone https://github
>> .com/docker/getting-started.git^C
PS C:\Users\wcsadmin\getting-started> cd getti
ng-started ^C
PS C:\Users\wcsadmin\getting-started> docker
build -t docker101tutorial . docker run -d -p
80:80 --name docker-tutorial docker101tutorial

unknown shorthand flag: 'd' in -d
See 'docker build --help'.
PS C:\Users\wcsadmin\getting-started> docker r
un -d -p 80:80 --name docker-tutorial docker10
1tutorial
e5b72f602a04e81b4fe2fb3c797054f0948f645b018eb9
f9510d099d60e55822
PS C:\Users\wcsadmin\getting-started> }
```

Click the Command Button to tag our tutorial image and push to Docker Hub.

```
PS C:\Users\kubelord\getting-started> docker tag docker101tutorial
georgeniece/docker101tutorial
```

```
PS C:\Users\kubelord\getting-started> docker push georgeniece/docker101tutorial
```

The push refers to repository [docker.io/georgeniece/docker101tutorial]

After the push completes we can check the status of the docker tutorial container we started with

```
PS C:\Users\kubelord\getting-started> docker ps
```

CONTAINER ID	IMAGE	COMMAND	CREATED
e5b72f602a04	docker101tutorial	"/docker-entrypoin...."	13 minutes ago
STATUS	NAMES		
Up 13 minutes	0.0.0.0:80->80/tcp	docker-tutorial	

```
PS C:\Users\kubelord\getting-started>
```

If we open a web browser to <https://hub.docker.com/repositories> we'll see the image under the repo we just created.