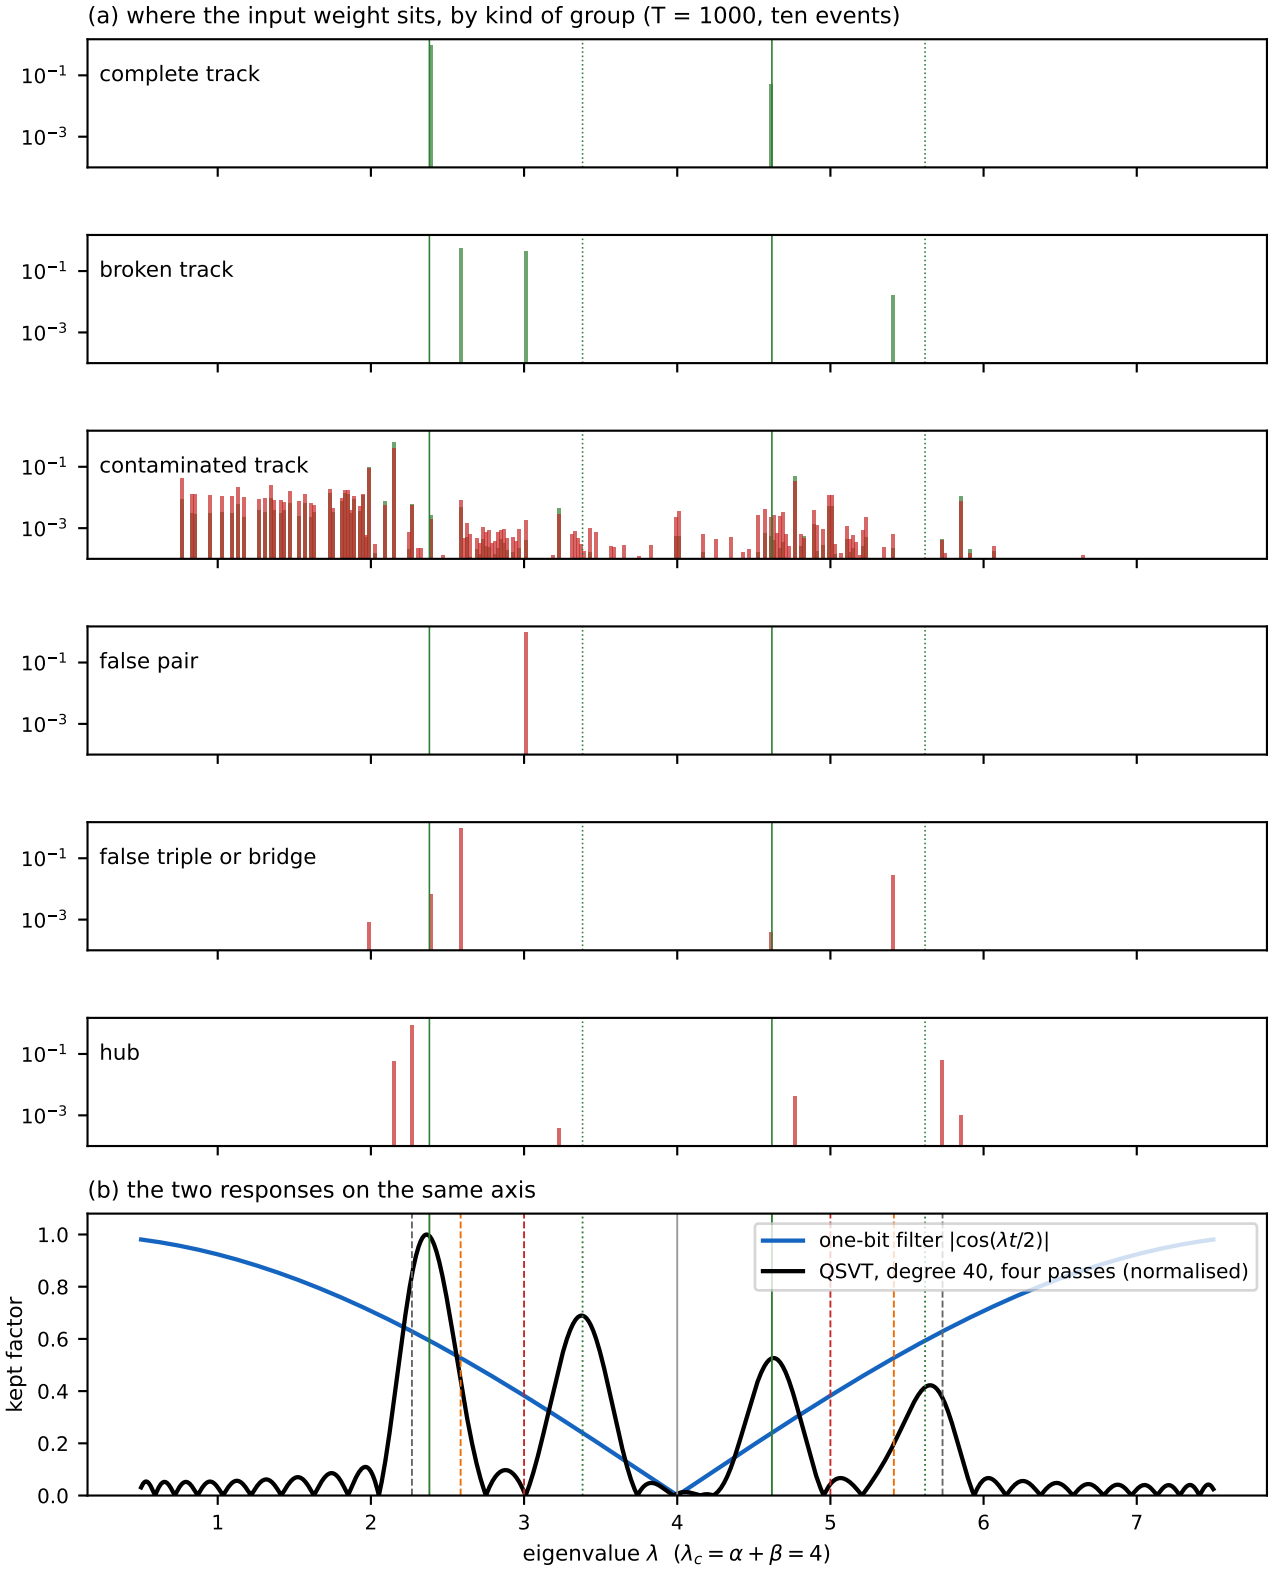

(a) where the input weight sits, by kind of group (T = 1000, ten events)
complete track
broken track
contaminated track
false pair
false triple or bridge
hub
10^{-1}
10^{-3}
(b) the two responses on the same axis
one-bit filter $|\cos(\lambda t/2)|$
QSVT, degree 40, four passes (normalised)
kept factor
0.0
0.2
0.4
0.6
0.8
1.0
1
2
3
4
5
6
7
eigenvalue λ ($\lambda_c = \alpha + \beta = 4$)