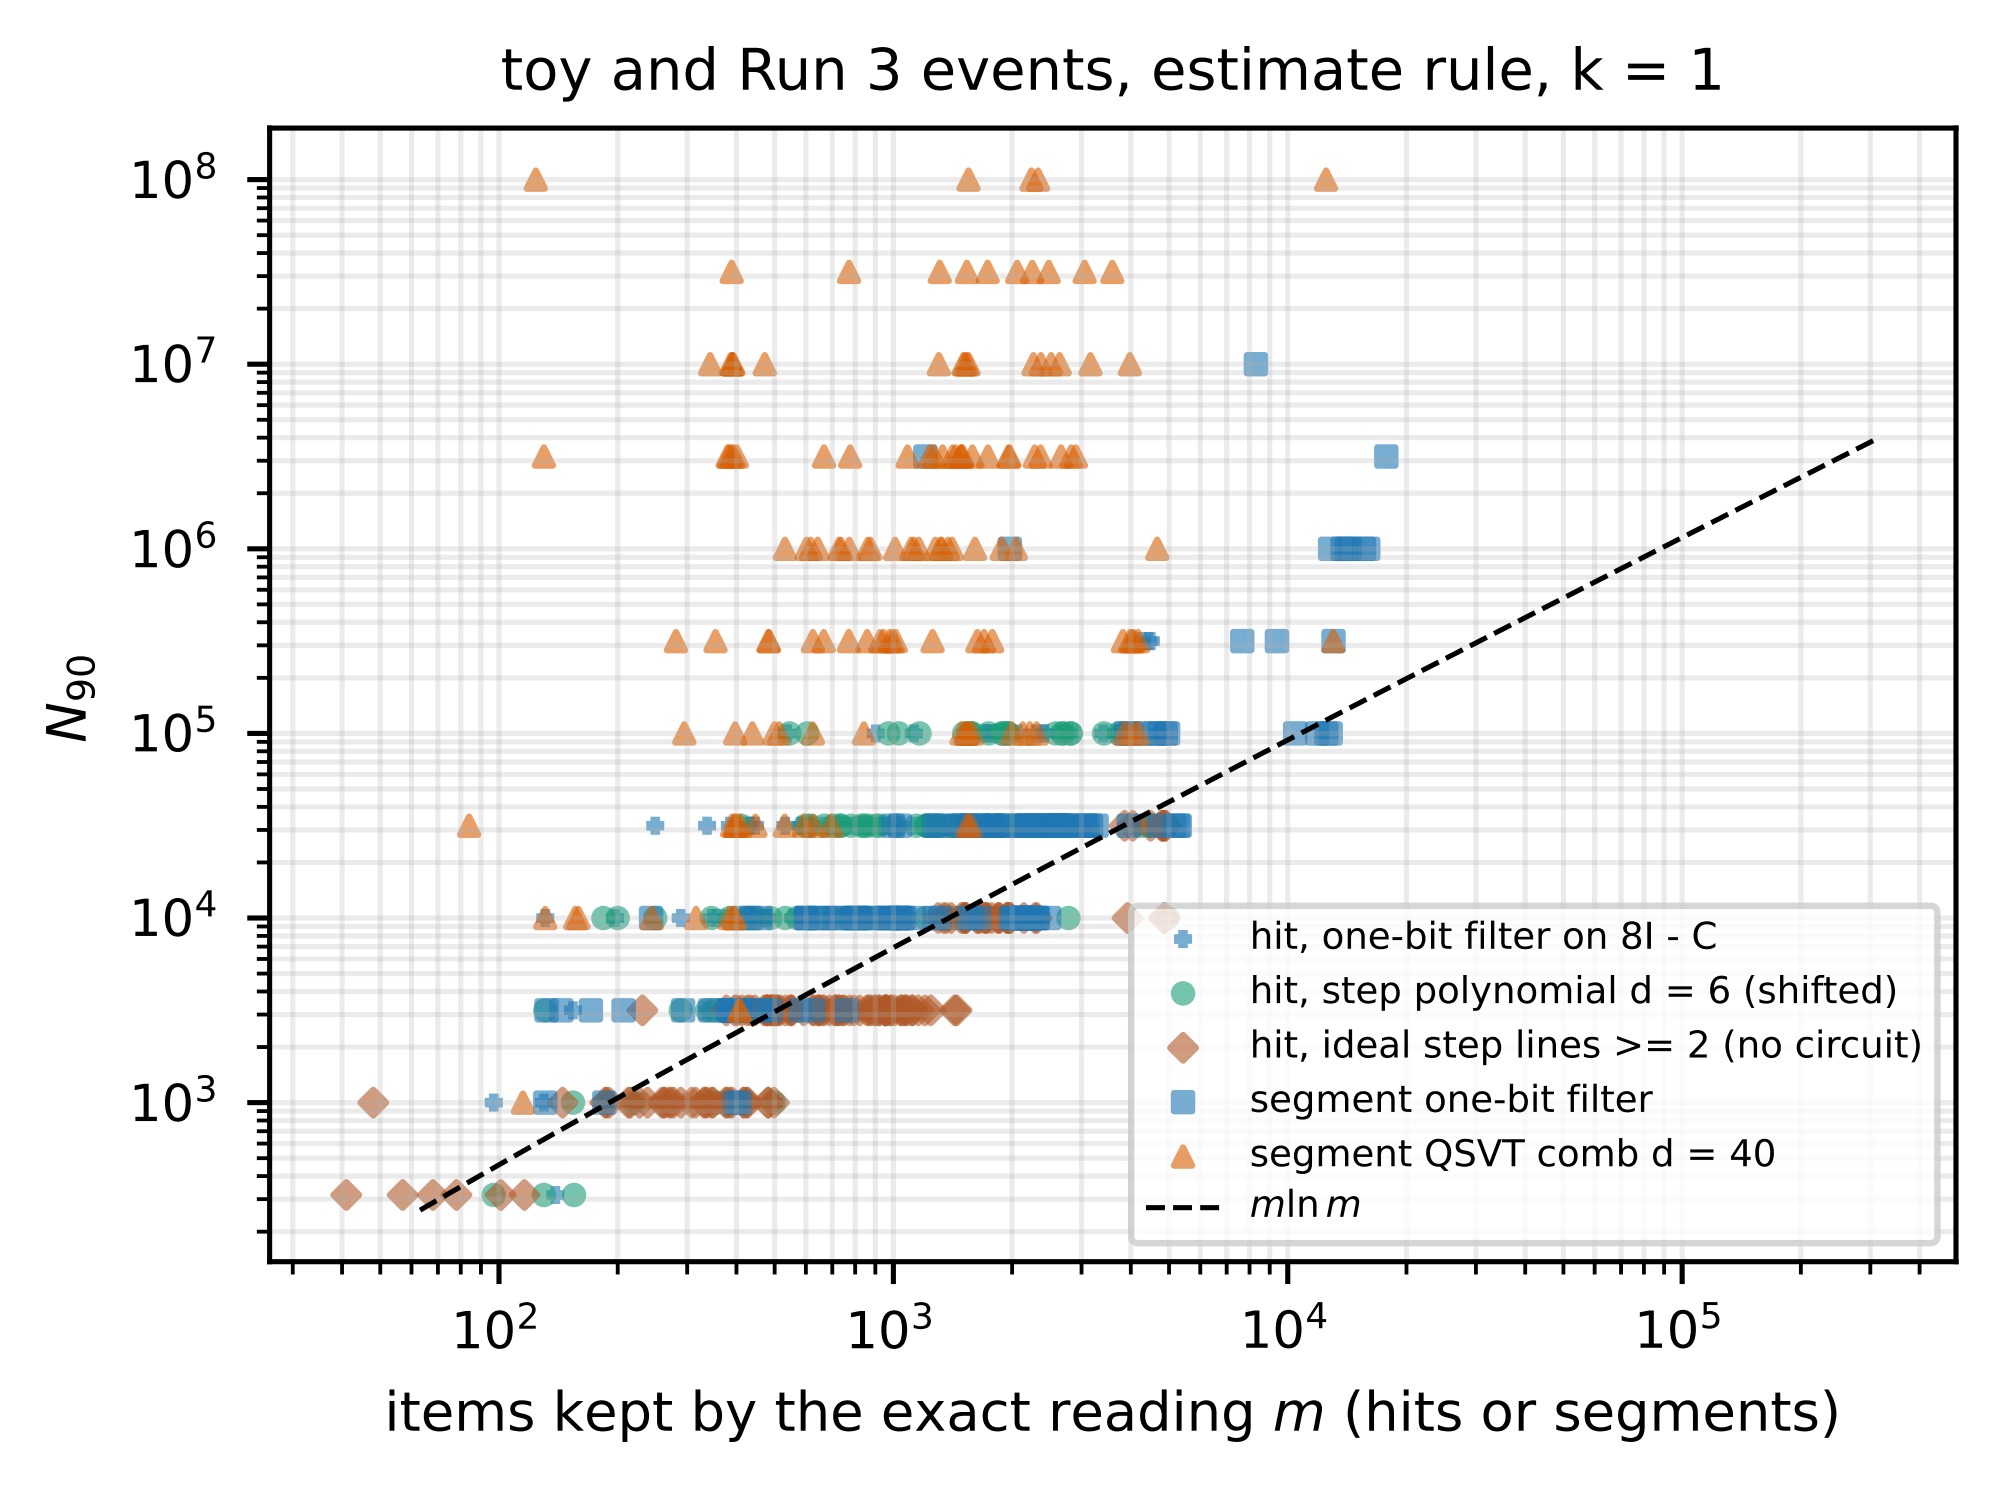
toy and Run 3 events, estimate rule, k = 1
N_{90}
10^8
10^7
10^6
10^5
10^4
10^3
10^2
10^3
10^4
10^5
items kept by the exact reading m (hits or segments)
hit, one-bit filter on 8I - C
hit, step polynomial d = 6 (shifted)
hit, ideal step lines >= 2 (no circuit)
segment one-bit filter
segment QSVT comb d = 40
$m \ln m$