

# **Introduction to Scientific Python programming - Apdapted to TKT4140 Numerical Methods with Computer Laboratory**

**Hans Petter Langtangen<sup>1,2</sup> (hpl@simula.no)**

**Leif Rune Hellevik<sup>3</sup> (leif.r.hellevik@ntnu.no)**

<sup>1</sup>Simula Research Laboratory

<sup>2</sup>University of Oslo

<sup>3</sup>Biomechanics Group, Departement of Structural Engineering NTNU

Jan 17, 2015

## **Contents**

**This is a very quick intro to Python programming**

- variables for numbers, lists, and arrays
- while loops and for loops
- functions
- if tests
- plotting
- files

Method: show program code through math examples

## Variables, loops, lists, and arrays



### Do you have access to Python?

See [TKT4140 Course specific installation guidelines](#)

Other methods:

- Mac and Windows: [Anaconda](#)
- Web browser ([Wakari](#) or [SageMathCloud](#))

### Mathematical example

Most examples will involve this formula:

$$s = v_0 t + \frac{1}{2} a t^2 \quad (1)$$

We may view  $s$  as a function of  $t$ :  $s(t)$ , and also include the parameters in the notation:  $s(t; v_0, a)$ .

### A program for evaluating a formula

**Task.** Compute  $s$  for  $t = 0.5$ ,  $v_0 = 2$ , and  $a = 0.2$ .

### Python code.

```
t = 0.5
v0 = 2
a = 0.2
s = v0*t + 0.5*a*t**2
print s
```

### Execution.

```
Terminal> python distance.py
1.025
```

### Assignment statements assign a name to an object

```
t = 0.5          # real number makes float object
v0 = 2           # integer makes int object
a = 0.2          # float object
s = v0*t + 0.5*a*t**2  # float object
```

Rule:

- evaluate right-hand side; it results in an *object*
- left-hand side is a name for that object

### Formatted output with text and numbers

- Task: write out text with a number (3 decimals): `s=1.025`
- Method: printf syntax

```
print 's=%g' % s      # g: compact notation
print 's=%.2f' % s    # f: decimal notation, .2f: 2 decimals
```

Modern alternative: format string syntax

```
print 's={s:.2f}'.format(s=s)
```

### Programming with a while loop

- Task: write out a table of  $t$  and  $s(t)$  values (two columns), for  $t \in [0, 2]$  in steps of 0.1
- Method: while loop

```
v0 = 2
a = 0.2
dt = 0.1 # Increment
t = 0    # Start value
while t <= 2:
    s = v0*t + 0.5*a*t**2
    print t, s
    t = t + dt
```

## Output of the previous program

```
Terminal> python while.py
0 0.0
0.1 0.201
0.2 0.404
0.3 0.609
0.4 0.816
0.5 1.025
0.6 1.236
0.7 1.449
0.8 1.664
0.9 1.881
1.0 2.1
1.1 2.321
1.2 2.544
1.3 2.769
1.4 2.996
1.5 3.225
1.6 3.456
1.7 3.689
1.8 3.924
1.9 4.161
```

## Structure of a while loop

```
while condition:
    <intented statement>
    <intented statement>
    <intented statement>
```

Note:

- the colon in the first line
- all statements in the loop *must be indented*  
(no braces as in C, C++, Java, ...)
- `condition` is a boolean expression (e.g., `t <= 2`)

## Let's take a closer look at the output of our program

```
Terminal> python while.py
0 0.0
0.1 0.201
0.2 0.404
...
1.8 3.924
1.9 4.161
```

The last line contains 1.9, but the while loop should run also when  $t = 2$  since the test is `t <= 2`. Why is this test `False`?

## Let's examine the program in the Python Online Tutor

Python Online Tutor: step through the program and examine variables

```
a = 0
da = 0.4
while a <= 1.2:
    print a
    a = a + da
```

(Visualize execution)

## Ooops, why is `a <= 1.2` when `a` is 1.2? Round-off errors!

```
a = 0
da = 0.4
while a <= 1.2:
    print a
    a = a + da
    # Inspect all decimals in da and a
    print 'da=%.16E\nda=%.16E' % (da, a)
    print 'a <= 1.2: %g' % (a <= 1.2)
```

(Visualize execution)

Small round-off error in `da` makes `a = 1.2000000000000002`

## Rule: never `a == b` for real `a` and `b`! Always use a tolerance!

```
a = 1.2
b = 0.4 + 0.4 + 0.4
boolean_condition1 = a == b           # may be False

# This is the way to do it
tol = 1E-14
boolean_condition2 = abs(a - b) < tol # True
```

## A list collects several objects in a given sequence

A list of numbers:

```
L = [-1, 1, 8.0]
```

A list can contain any type of objects, e.g.,

```
L = ['mydata.txt', 3.14, 10] # string, float, int
```

Some basic list operations:

```
>>> L = ['mydata.txt', 3.14, 10]
>>> print L[0]      # print first element (index 0)
mydata.txt
>>> print L[1]      # print second element (index 1)
3.14
>>> del L[0]        # delete the first element
>>> print L
```

```

[3.14, 10]
>>> print len(L)  # length of L
2
>>> L.append(-1)  # add -1 at the end of the list
>>> print L
[3.14, 10, -1]

```

## Store our table in two lists, one for each column

```

v0 = 2
a = 0.2
dt = 0.1 # Increment
t = 0
t_values = []
s_values = []
while t <= 2:
    s = v0*t + 0.5*a*t**2
    t_values.append(t)
    s_values.append(s)
    t = t + dt
print s_values # Just take a look at a created list

# Print a nicely formatted table
i = 0
while i <= len(t_values)-1:
    print '%.2f %.4f' % (t_values[i], s_values[i])
    i += 1 # Same as i = i + 1

```

## For loops

A for loop is used for visiting elements in a list, one by one:

```

>>> L = [1, 4, 8, 9]
>>> for e in L:
...     print e
...
1
4
8
9

```

Demo in the Python Online Tutor:

```

list1 = [0, 0.1, 0.2]
list2 = []
for element in list1:
    p = element + 2
    list2.append(p)
print list2

```

([Visualize execution](#))

## Traditional for loop: integer counter over list/array indices

```

somelist = ['file1.dat', 22, -1.5]

for i in range(len(somelist)):

```

```
# access list element through index
print somelist[i]
```

Note:

- range returns a list of integers
- range(a, b, s) returns the integers a, a+s, a+2\*s, ... up to *but not including* (!! ) b
- range(b) implies a=0 and s=1
- range(len(somelist)) returns [0, 1, 2]

Let's replace our while loop by a for loop

```
v0 = 2
a = 0.2
dt = 0.1 # Increment
t_values = []
s_values = []
n = int(round(2/dt)) + 1 # No of t values
for i in range(n):
    t = i*dt
    s = v0*t + 0.5*a*t**2
    t_values.append(t)
    s_values.append(s)
print s_values # Just take a look at a created list

# Make nicely formatted table
for t, s in zip(t_values, s_values):
    print '%.2f %.4f' % (t, s)

# Alternative implementation
for i in range(len(t_values)):
    print '%.2f %.4f' % (t_values[i], s_values[i])
```

Traversal of multiple lists at the same time with zip

```
for e1, e2, e3, ... in zip(list1, list2, list3, ...):
```

Alternative: loop over a common index for the lists

```
for i in range(len(list1)):
    e1 = list1[i]
    e2 = list2[i]
    e3 = list3[i]
    ...
```

Arrays are computationally efficient lists of numbers

- Lists collect a set of objects in a single variable
- Lists are very flexible (can grow, can contain “anything”)

- Array: computationally efficient and convenient list
- Arrays must have fixed length and can only contain numbers of the same type (integers, real numbers, complex numbers)
- Arrays require the `numpy` module

## Examples on using arrays

```
>>> import numpy
>>> L = [1, 4, 10.0] # List of numbers
>>> a = numpy.array(L) # Convert to array
>>> print a
[ 1.  4. 10.]
>>> print a[1] # Access element through indexing
4.0
>>> print a[0:2] # Extract slice (index 2 not included!)
[ 1.  4.]
>>> print a.dtype # Data type of an element
float64
>>> b = 2*a + 1 # Can do arithmetics on arrays
>>> print b
[ 3.  9. 21.]
```

## numpy functions creates entire arrays at once

Apply  $\ln$  to all elements in array `a`:

```
>>> c = numpy.log(a)
>>> print c
[ 0.          1.38629436  2.30258509]
```

Create  $n + 1$  uniformly distributed coordinates in  $[a, b]$ :

```
t = numpy.linspace(a, b, n+1)
```

Create array of length  $n$  filled with zeros:

```
t = numpy.zeros(n)
s = numpy.zeros_like(t) # zeros with t's size and data type
```

## Let's use arrays in our previous program

```
import numpy
v0 = 2
a = 0.2
dt = 0.1 # Increment
n = int(round(2/dt)) + 1 # No of t values

t_values = numpy.linspace(0, 2, n+1)
s_values = v0*t + 0.5*a*t**2

# Make nicely formatted table
for t, s in zip(t_values, s_values):
    print '%.2f %.4f' % (t, s)
```

Note: no explicit loop for computing `s_values`!



Standard mathematical functions are found in the `math` module

```
>>> import math
>>> print math.sin(math.pi)
1.2246467991473532e-16      # Note: only approximate value
```

Get rid of the `math` prefix:

```
from math import sin, pi
print sin(pi)

# Or import everything from math
from math import *
print sin(pi), log(e), tanh(0.5)
```

Use the `numpy` module for standard mathematical functions applied to arrays

Matlab users can do

```
from numpy import *
x = linspace(0, 1, 101)
y = exp(-x)*sin(pi*x)
```

The Python community likes

```
import numpy as np
x = np.linspace(0, 1, 101)
y = np.exp(-x)*np.sin(np.pi*x)
```

Our convention: use `np` prefix, but not in formulas involving math functions

```
import numpy as np
x = np.linspace(0, 1, 101)

from numpy import sin, exp, pi
y = exp(-x)*sin(pi*x)
```

## Plotting

Plotting is done with `matplotlib`:


```
import numpy as np
import matplotlib.pyplot as plt

v0 = 0.2
a = 2
n = 21 # No of t values for plotting

t = np.linspace(0, 2, n+1)
s = v0*t + 0.5*a*t**2

plt.plot(t, s)
plt.savefig('myplot.png')
plt.show()
```

The plotfile `myplot.png` looks like

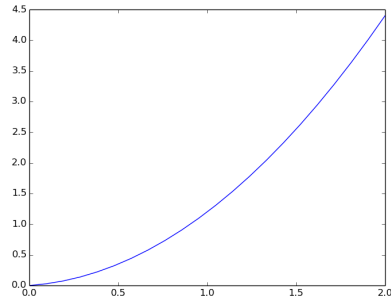


## Plotting of multiple curves

```
import numpy as np
import matplotlib.pyplot as plt


v0 = 0.2
n = 21 # No of t values for plotting

t = np.linspace(0, 2, n+1)
a = 2
s0 = v0*t + 0.5*a*t**2
a = 3
s1 = v0*t + 0.5*a*t**2

plt.plot(t, s0, 'r-', # Plot s0 curve with red line
         t, s1, 'bo') # Plot s1 curve with blue circles
plt.xlabel('t')
plt.ylabel('s')
plt.title('Distance plot')
plt.legend(['$s(t; v_0=2, a=0.2)$', '$s(t; v_0=2, a=0.8)$'],
          loc='upper left')
plt.savefig('myplot.png')
plt.show()
```

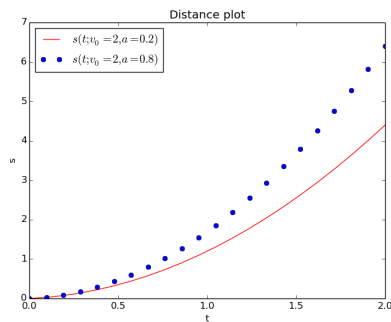

## Functions and branching

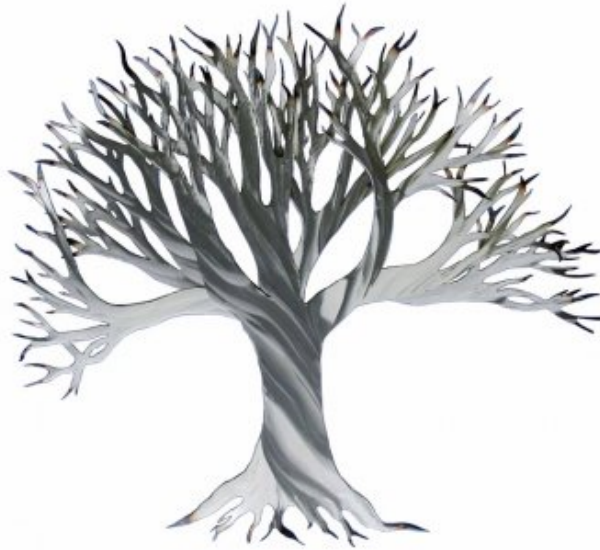

### Functions

- $s(t) = v_0t + \frac{1}{2}at^2$  is a mathematical function
- Can implement  $s(t)$  as a Python function `s(t)`

```
def s(t):  
    return v0*t + 0.5*a*t**2  
  
v0 = 0.2  
a = 4  
value = s(3)    # Call the function
```

Note:

- functions start with the keyword `def`
- statements belonging to the function must be indented
- function input is represented by arguments (separated by comma if more than one)
- function output is returned to the calling code
- `v0` and `a` are *global variables*, which must be initialized before `s(t)` is called

## Functions can have multiple arguments

`v0` and `a` as function arguments instead of global variables:

```
def s(t, v0, a):
    return v0*t + 0.5*a*t**2

value = s(3, 0.2, 4)    # Call the function

# More readable call
value = s(t=3, v0=0.2, a=4)
```

## Keyword arguments are arguments with default values

```
def s(t, v0=1, a=1):
    return v0*t + 0.5*a*t**2

value = s(3, 0.2, 4)    # specify new v0 and a
value = s(3)            # rely on v0=1 and a=1
value = s(3, a=2)       # rely on v0=1
value = s(3, v0=2)       # rely on a=1
value = s(t=3, v0=2, a=2) # specify everything
value = s(a=2, t=3, v0=2) # any sequence allowed
```

- Arguments without the argument name are called *positional arguments*
- Positional arguments must always be listed before the *keyword arguments* in the function and in any call
- The sequence of the keyword arguments can be arbitrary

## Vectorization speeds up the code

Scalar code (work with one number at a time):

```
def s(t, v0, a):
    return v0*t + 0.5*a*t**2

for i in range(len(t)):
    s_values[i] = s(t_values[i], v0, a)
```

Vectorized code: apply `s` to the entire array

```
s_values = s(t_values, v0, a)
```

How can this work?

- Expression:  $v0*t + 0.5*a*t^2$  with array `t`
- `r1 = v0*t` (scalar times array)
- `r2 = t**2` (square each element)
- `r3 = 0.5*a*r2` (scalar times array)
- `r1 + r3` (add each element)

## Python functions written for scalars normally work for arrays too!

True if computations involve arithmetic operations and math functions:

```
from math import exp, sin

def f(x):
    return 2*x + x**2*exp(-x)*sin(x)

v = f(4)  # f(x) works with scalar x

# Redefine exp and sin with their vectorized versions
from numpy import exp, sin, linspace
x = linspace(0, 4, 100001)
v = f(x)  # f(x) works with array x
```

## Python functions can return multiple values

Return  $s(t) = v_0t + \frac{1}{2}at^2$  and  $s'(t) = v_0 + at$ :

```
def movement(t, v0, a):
    s = v0*t + 0.5*a*t**2
    v = v0 + a*t
    return s, v

s_value, v_value = movement(t=0.2, v0=2, a=4)
```

`return s, v` means that we return a *tuple* ( $\approx$  list):

```
>>> def f(x):
...     return x+1, x+2, x+3
...
>>> r = f(3)  # Store all three return values in one object r
>>> print r
(4, 5, 6)
>>> type(r)  # What type of object is r?
<type 'tuple'>
>>> print r[1]
5
```

Tuples are constant lists (cannot be changed)

## A more general mathematical formula (part I)

Equations from basic kinematics:

$$v = \frac{ds}{dt}, \quad s(0) = s_0$$
$$a = \frac{dv}{dt}, \quad v(0) = v_0$$

Integrate to find  $v(t)$ :

$$\int_0^t a(t)dt = \int_0^t \frac{dv}{dt}dt$$

which gives

$$v(t) = v_0 + \int_0^t a(t)dt$$

## A more general mathematical formula (part II)

Integrate again over  $[0, t]$  to find  $s(t)$ :

$$s(t) = s_0 + v_0t + \int_0^t \left( \int_0^t a(t)dt \right) dt$$

Example:  $a(t) = a_0$  for  $t \in [0, t_1]$ , then  $a(t) = 0$  for  $t > t_1$ :

$$s(t) = \begin{cases} s_0 + v_0t + \frac{1}{2}a_0t^2, & t \leq t_1 \\ s_0 + v_0t_1 + \frac{1}{2}a_0t_1^2 + a_0t_1(t - t_1), & t > t_1 \end{cases}$$

Need *if test* to implement this!

## Basic if-else tests

An if test has the structure

```
if condition:
    <statements when condition is True>
else:
    <statements when condition is False>
```

Here,

- condition is a boolean expression with value True or False.

```
if t <= t1:
    s = v0*t + 0.5*a0*t**2
else:
    s = v0*t + 0.5*a0*t1**2 + a0*t1*(t-t1)
```

## Multi-branch if tests

```
if condition1:
    <statements when condition1 is True>
elif condition2:
    <statements when condition1 is False and condition2 is True>
elif condition3:
    <statements when condition1 and condition 2 are False
    and condition3 is True>
else:
    <statements when condition1/2/3 all are False>
```

Just if, no else:

```
if condition:
    <statements when condition is True>
```

## Implementation of a piecewisely defined function with if

A Python function implementing the mathematical function

$$s(t) = \begin{cases} s_0 + v_0 t + \frac{1}{2} a_0 t^2, & t \leq t_1 \\ s_0 + v_0 t_1 + \frac{1}{2} a_0 t_1^2 + a_0 t_1 (t - t_1), & t > t_1 \end{cases}$$

reads

```
def s_func(t, v0, a0, t1):
    if t <= t1:
        s = v0*t + 0.5*a0*t**2
    else:
        s = v0*t + 0.5*a0*t1**2 + a0*t1*(t-t1)
    return s
```

## Python functions containing if will not accept array arguments

```
>>> def f(x): return x if x < 1 else 2*x
...
>>> import numpy as np
>>> x = np.linspace(0, 2, 5)
>>> f(x)
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one
element is ambiguous. Use a.any() or a.all()
```

Problem:  $x < 1$  evaluates to a boolean array, not just a boolean

## Remedy 1: Call the function with scalar arguments

```
n = 201 # No of t values for plotting
t1 = 1.5

t = np.linspace(0, 2, n+1)
s = np.zeros(n+1)
for i in range(len(t)):
    s[i] = s_func(t=t[i], v0=0.2, a0=20, t1=t1)
```

Can now easily plot:

```
plt.plot(t, s, 'b-')
plt.plot([t1, t1], [0, s_func(t=t1, v0=0.2, a0=20, t1=t1)], 'r--')
plt.xlabel('t')
plt.ylabel('s')
plt.savefig('myplot.png')
plt.show()
```

## Remedy 2: Vectorize the if test with `where`

Functions with if tests require a complete rewrite to work with arrays.

```
s = np.where(condition, s1, s2)
```

Explanation:

- `condition`: array of boolean values
- `s[i] = s1[i]` if `condition[i]` is True
- `s[i] = s2[i]` if `condition[i]` is False

Our example then becomes

```
s = np.where(t <= t1,
               v0*t + 0.5*a0*t**2,
               v0*t + 0.5*a0*t1**2 + a0*t1*(t-t1))
```

Note that `t <= t1` with array `t` and scalar `t1` results in a boolean array `b` where `b[i] = t[i] <= t1`.

## Remedy 3: Vectorize the if test with array indexing

- Let `b` be a boolean array (e.g., `b = t <= t1`)
- `s[b]` selects all elements `s[i]` where `b[i]` is True
- Can assign some array expression `expr` of length `len(s[b])` to `s[b]`:  
`s[b] = (expr)[b]`

Our example can utilize this technique with `b` as `t <= t1` and `t > t1`:

```
s = np.zeros_like(t) # Make s as zeros, same size & type as t
s[t <= t1] = (v0*t + 0.5*a0*t**2)[t <= t1]
s[t > t1] = (v0*t + 0.5*a0*t1**2 + a0*t1*(t-t1))[t > t1]
```

## Files





## File reading

Put input data in a text file:

```
v0 = 2
a = 0.2
dt = 0.1
interval = [0, 2]
```

How can we read this file into variables `v0`, `a`, `dt`, and `interval`?

### Code for reading files with lines `variable = value`

```
infile = open('.input.dat', 'r')
for line in infile:
    # Typical line: variable = value
    variable, value = line.split('=')
    variable = variable.strip() # remove leading/trailing blanks
    if variable == 'v0':
        v0 = float(value)
    elif variable == 'a':
        a = float(value)
    elif variable == 'dt':
        dt = float(value)
    elif variable == 'interval':
        interval = eval(value)
infile.close()
```

### Splitting lines into words is a frequent operation

```
>>> line = 'v0 = 5.3'
>>> variable, value = line.split('=')
>>> variable
'v0 '
>>> value
' 5.3'
>>> variable.strip() # strip away blanks
'v0'
```

Note: must convert value to float before we can compute with the value!

## The magic eval function

`eval(s)` executes a string `s` as a Python expression and creates the corresponding Python object

```
>>> obj1 = eval('1+2') # Same as obj1 = 1+2
>>> obj1, type(obj1)
(3, <type 'int'>)
>>> obj2 = eval('[-1, 8, 10, 11]')
>>> obj2, type(obj2)
([-1, 8, 10, 11], <type 'list'>)
>>> from math import sin, pi
>>> x = 1
>>> obj3 = eval('sin(pi*x)')
>>> obj3, type(obj3)
(1.2246467991473532e-16, <type 'float'>)
```

Why is this so great? We can read formulas, lists, expressions as text from file and with `eval` turn them into live Python objects!

## Implementing a calculator in Python

Demo:

```
Terminal> python calc.py "1 + 0.5*2"
2.0
Terminal> python calc.py "sin(pi*2.5) + exp(-4)"
1.0183156388887342
```

Just 5 lines of code:

```
import sys
command_line_expression = sys.argv[1]
from math import * # Define sin, cos, exp, pi, etc.
result = eval(command_line_expression)
print result
```

## Modern Python often applies the `with` statement for file handling

```
with open('input.dat', 'r') as infile:
    for line in infile:
        ...
```

No need to close the file when using `with`

## File writing

- We have  $t$  and  $s(t)$  values in two lists, `t_values` and `s_values`
- Task: write these lists as a nicely formatted table in a file

Code:

```
outfile = open('table1.dat', 'w')
outfile.write('# t    s(t)\n') # write table header
for t, s in zip(t_values, s_values):
    outfile.write('%0.2f %0.4f\n' % (t, s))
```

## Simplified writing of tabular data to file via `numpy.savetxt`

```
import numpy as np
# Make two-dimensional array of [t, s(t)] values in each row
data = np.array([t_values, s_values]).transpose()

# Write data array to file in table format
np.savetxt('table2.dat', data, fmt=['%0.2f', '%0.4f'],
          header='t    s(t)', comments='# ')
```

table2.dat:

```

# t    s(t)
0.00 0.0000
0.10 0.2010
0.20 0.4040
0.30 0.6090
0.40 0.8160
0.50 1.0250
0.60 1.2360
...
1.90 4.1610
2.00 4.4000

```

### Simplified reading of tabular data from file via `numpy.loadtxt`

```
data = np.loadtxt('table2.dat', comments='#')
```

Note:

- Lines beginning with the comment character `#` are skipped in the reading
- `data` is a two-dimensional array: `data[i,0]` holds the  $t$  value and `data[i,1]` the  $s(t)$  value in the  $i$ -th row

## Index

array, 7  
assignment statement, 3  
  
boolean expression, 4, 14  
branching, 14  
  
False, 4  
float, 3  
for loop, 6  
format string syntax, 3  
  
global variables, 11  
graphics, 9  
  
if test, 14  
import of modules, 9  
int, 3  
  
keyword arguments, 12  
  
linspace, 8  
list, 5  
  
math, 9  
mathematical functions, 9  
matplotlib, 9  
multiple lists traversal with zip, 7  
multiple return values, 13  
  
numpy, 7  
  
objects, 3  
  
plotting, 9  
print statement, 3  
program file, 2  
Python Online Tutor, 5  
  
text editor, 2  
True, 4  
  
variable, 3  
vectorization, 12  
vectorized functions, 12  
vectorizing if tests, 16  
  
visualization, 9  
while loop, 3  
zip, 7