

dea-tools: Geospatial analysis of satellite data using Xarray, the Open Data Cube, and Digital Earth Australia

Chad Burton ¹✉

¹ Geoscience Australia, Australia  ✉ Corresponding author

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) 
- [Repository](#) 
- [Archive](#) 

Editor: [Open Journals](#) 

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

dea-tools is an open-source Python package for geospatial analysis of satellite data using Digital Earth Australia, [Open Data Cube](#) (ODC) and xarray ([Hoyer & Joseph, 2017](#)). It provides a broad set of utilities for loading, visualising, transforming, and analysing Earth Observation (EO) data across space and time.

The package includes tools for:

- **Data handling:** Load and combine DEA data products, manage projections and resolutions.
- **Visualisation:** Create static and interactive maps, RGB plots, and animations.
- **Remote sensing indices:** Calculate band indices such as NDVI, NDWI, and more.
- **Spatial and temporal analysis:** Apply raster/vector operations, extract contours, compute temporal stats, and model change over time.
- **Machine learning and segmentation:** Train and apply classifiers, or run image segmentation workflows.
- **Parallel processing:** Set up Dask clusters for scalable processing of large datasets.
- **Domain-specific tools:** Analyse coastal change, intertidal zones, land cover, wetland and waterbody dynamics, and climate datasets.

Statement of need

Satellite remote sensing offers an unparalleled resource for...

Features

Analytical tools native to Xarray

Flexible and powerful functionality for scientific analysis with xarray objects:

- Extracting time series statistics, using the module `dea-tools.temporal`:
 - Generic summary statistics on any time series with `temporal_statistics`
 - Phenology with `xr_phenology`
 - Linear regression with `xr_regression`
- Validation tools within `dea-tools.validation`:
 - Compute common statistical metrics with `eval_metric`
 - Generate random points over an xarray object with `xr_random_sampling`

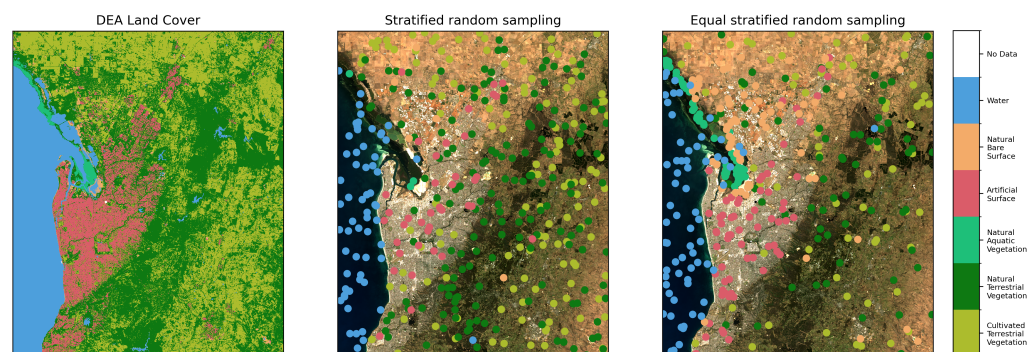


Figure 1: Example extraction of random samples from a classified xarray.DataArray using two of the sampling strategies available in the `xr_random_sampling` function.

- 35 ▪ Spatial analysis tools within `dea-tools.spatial`:
 - 36 – Vectorise `xarray.DataArrays` into `geopandas.GeoDataFrames` with `xr_vectorise`
 - 37 – Rasterize `geopandas.GeoDataFrames` into `xarray.DataArrays` with `xr_rasterize`
 - 38 – Extract subpixel contours from `xarray.DataArrays` with `subpixel_contours`
 - 39 – Interpolate point data stored in a `geopandas.GeoDataFrame` into an `xarray.DataArray` with `xr_interpolate`
 - 40 – Interpolate point data stored in a `geopandas.GeoDataFrame` into an `xarray.DataArray` with `xr_interpolate`
- 41 ▪ Xarray wrappers for the full machine learning pipeline in `dea-tools.classification`:
 - 42 – prepare data for ML predictions with `sklearn_flatten` and `sklearn_unflatten`
 - 43 – Fit models with `fit_xr`
 - 44 – ML predictions with `predict_xr`
 - 45 – Handle spatial autocorrelation in cross-validation workflows with `spatial_train_test_split`
 - 46 and `SKCV` (spatial k-fold cross validation)

47 Plotting

48 The `dea-tools.plotting` library has extensive functionality for generating beautiful imagery
49 from `xarray` objects.

- 50 ▪ RGB plots for true and false colour composite images with `rgb`
- 51 ▪ Highly customisable animations with `xr_animation`

52 Integration with Open Data Cube libraries

53 `dea-tools` works naively with `odc-geo` and `odc-stac`

54 Acknowledgements

55 Thanks

56 References

- 57 Hoyer, S., & Joseph, H. (2017). xarray: N-D labeled arrays and datasets in Python. *Journal*
58 *of Open Research Software*, 5(1). <https://doi.org/10.5334/jors.148>