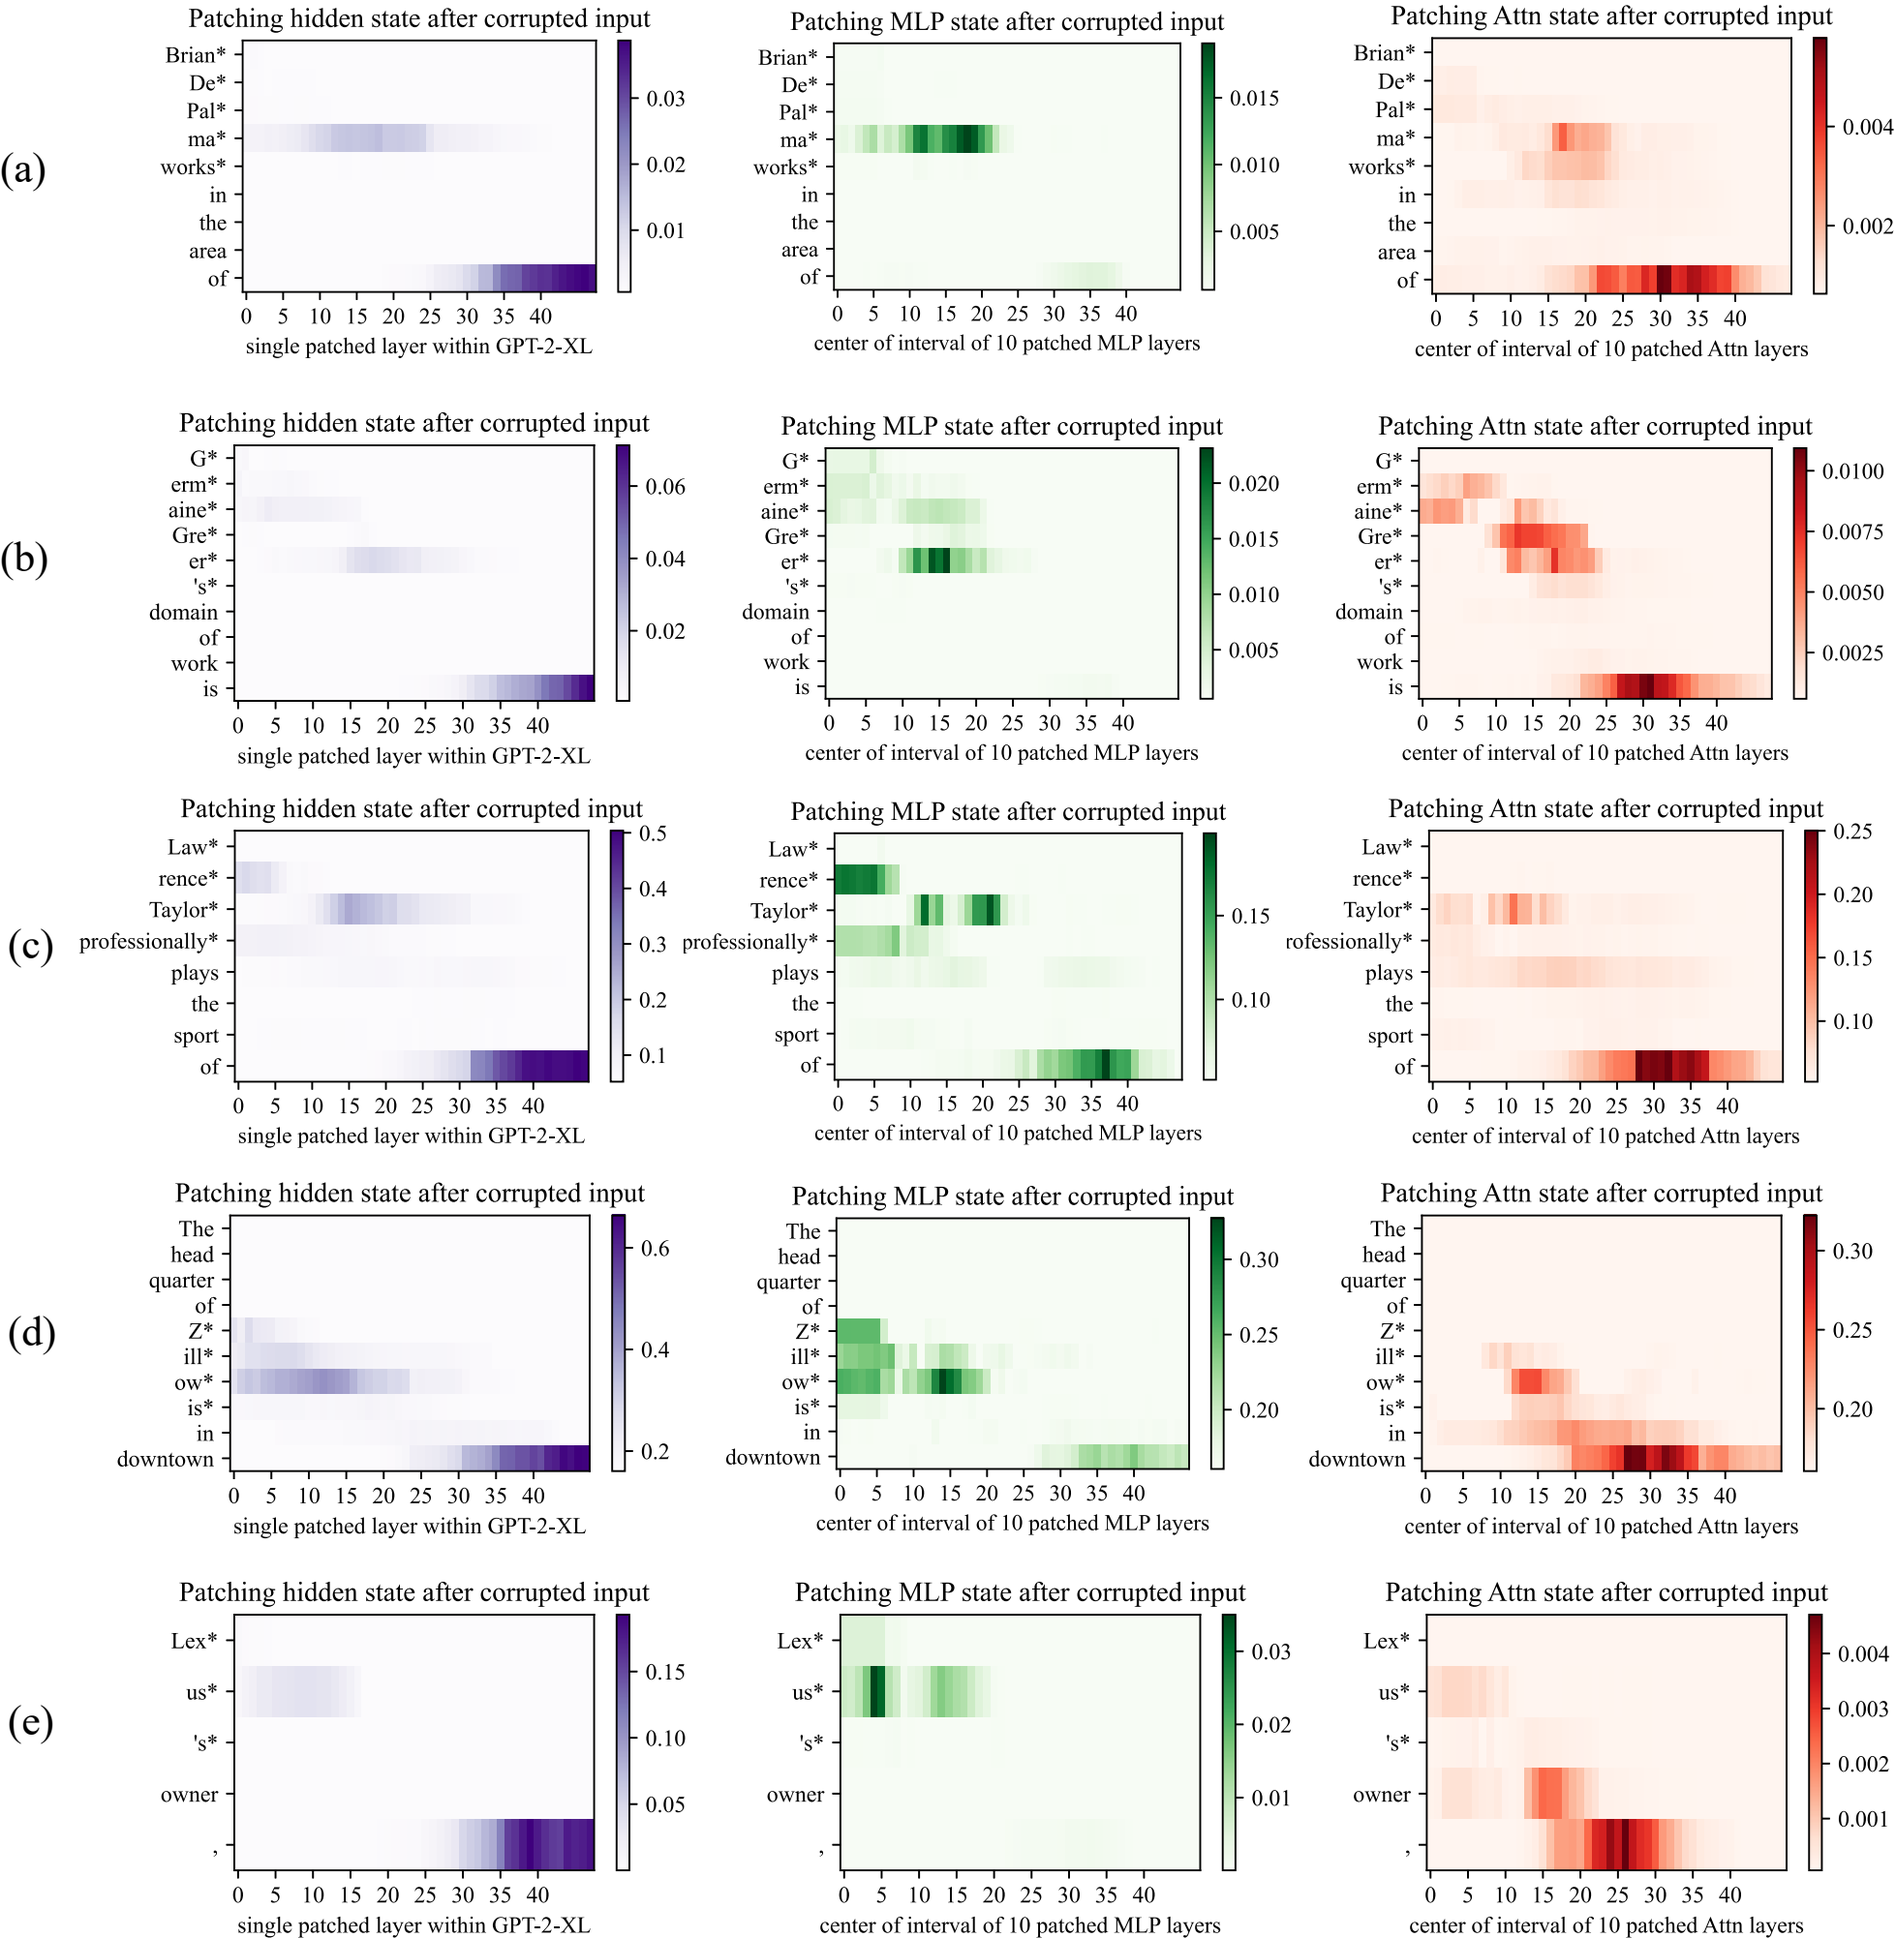
(a)
Patching hidden state after corrupted input
Brian*
De*
Pal*
ma*
works*
in
the
area
of
0.03
0.02
0.01
0 5 10 15 20 25 30 35 40
single patched layer within GPT-2-XL
Patching MLP state after corrupted input
0.015
0.010
0.005
center of interval of 10 patched MLP layers
Patching Attn state after corrupted input
0.004
0.002
center of interval of 10 patched Attn layers
(b)
Patching hidden state after corrupted input
G*
erm*
aine*
Gre*
er*
's*
domain
of
work
is
0.06
0.04
0.02
single patched layer within GPT-2-XL
Patching MLP state after corrupted input
0.020
0.015
0.010
0.005
center of interval of 10 patched MLP layers
Patching Attn state after corrupted input
0.0100
0.0075
0.0050
0.0025
center of interval of 10 patched Attn layers
(c)
Patching hidden state after corrupted input
Law*
rence*
Taylor*
professionally*
plays
the
sport
of
0.5
0.4
0.3
0.2
0.1
single patched layer within GPT-2-XL
Patching MLP state after corrupted input
0.15
0.10
center of interval of 10 patched MLP layers
Patching Attn state after corrupted input
rofessionally*
0.25
0.20
0.15
0.10
center of interval of 10 patched Attn layers
(d)
Patching hidden state after corrupted input
The
head
quarter
of
Z*
ill*
ow*
is*
in
downtown
0.6
0.4
0.2
single patched layer within GPT-2-XL
Patching MLP state after corrupted input
0.30
0.25
0.20
center of interval of 10 patched MLP layers
Patching Attn state after corrupted input
0.30
0.25
0.20
center of interval of 10 patched Attn layers
(e)
Patching hidden state after corrupted input
Lex*
us*
's*
owner
,
0.15
0.10
0.05
single patched layer within GPT-2-XL
Patching MLP state after corrupted input
0.03
0.02
0.01
center of interval of 10 patched MLP layers
Patching Attn state after corrupted input
0.004
0.003
0.002
0.001
center of interval of 10 patched Attn layers