EX:1- EXTERNAL css

INPUT:

```
external - Notepad
File  Edit  Format  View  Help

<!DOCTYPE html>
<html>
<head>
<link rel="stylesheet"href="mystyle.css">
</head>
<body>
<h1>This is a heading</h1>
<p>This is a paragraph.</p>
</body>
</html>
```
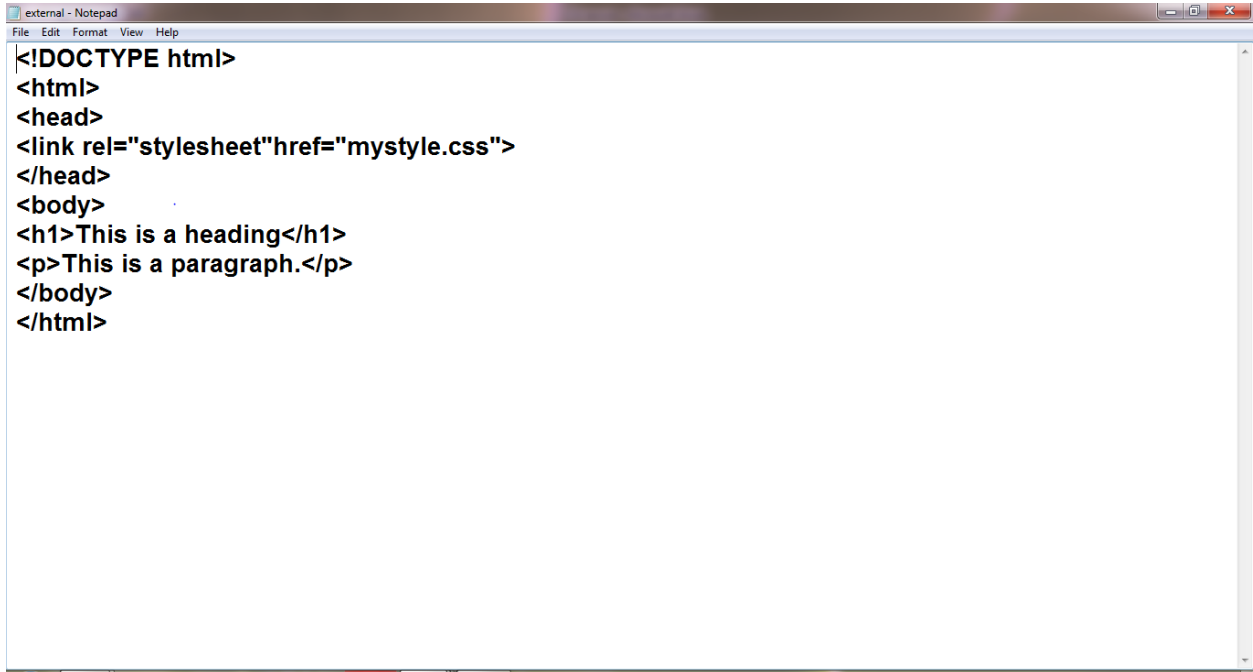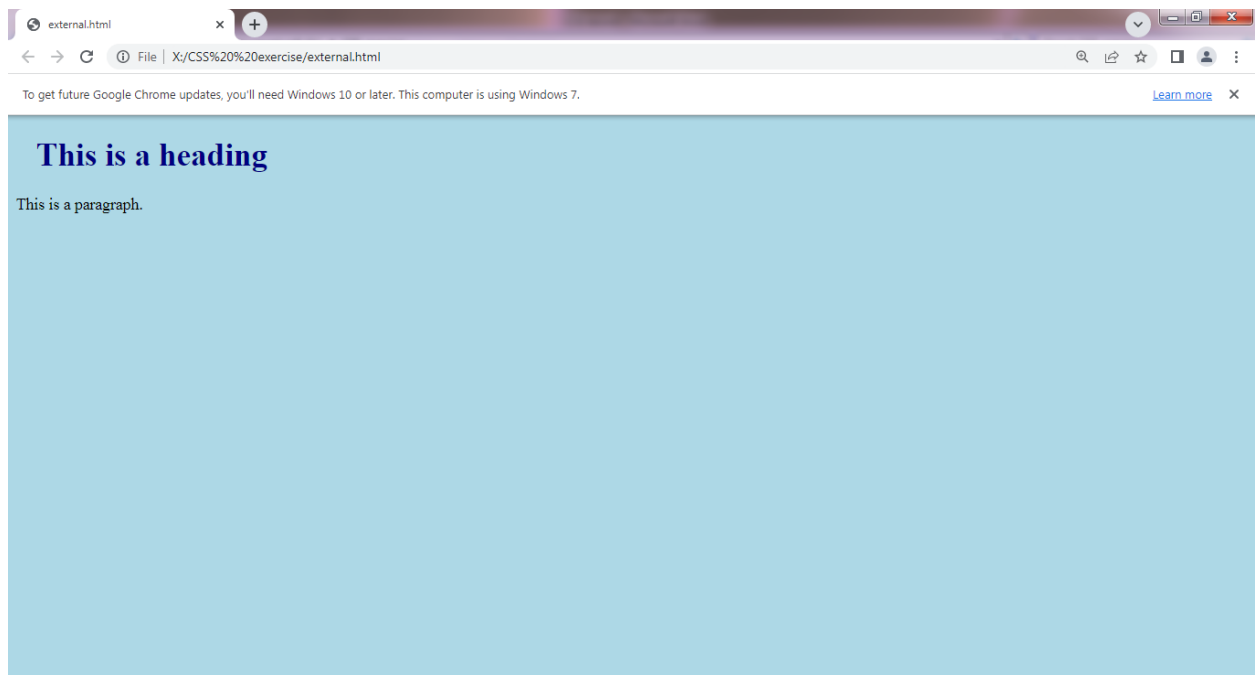
OUTPUT:

external.html

X:/CSS%20%20exercise/external.html

To get future Google Chrome updates, you'll need Windows 10 or later. This computer is using Windows 7.   Learn more

This is a heading

This is a paragraph.

EX:2- INTERNAL css

INPUT:

```
<DOCTYPE html>
<html>
<head>
<style>
body{
background-color:linear;
}
h1{
color:maroon;
margin-left:40px;
}
</style>
</head>
<body>
<h1> This is a heading</h1>
<p> This is a paragraph.</p>
</body>
</html>
```

OUTPUT:

This is a heading

This is a paragraph.

EX:3- INLINE css

INPUT:

```
<!DOCUTYPE html>
<html>
<body>
<h1 style="color:lightpink;text-align:center;">
This is a heading</h1>
<p style="color:red;">This is a paragraph.</p>
</body>
</html>
```
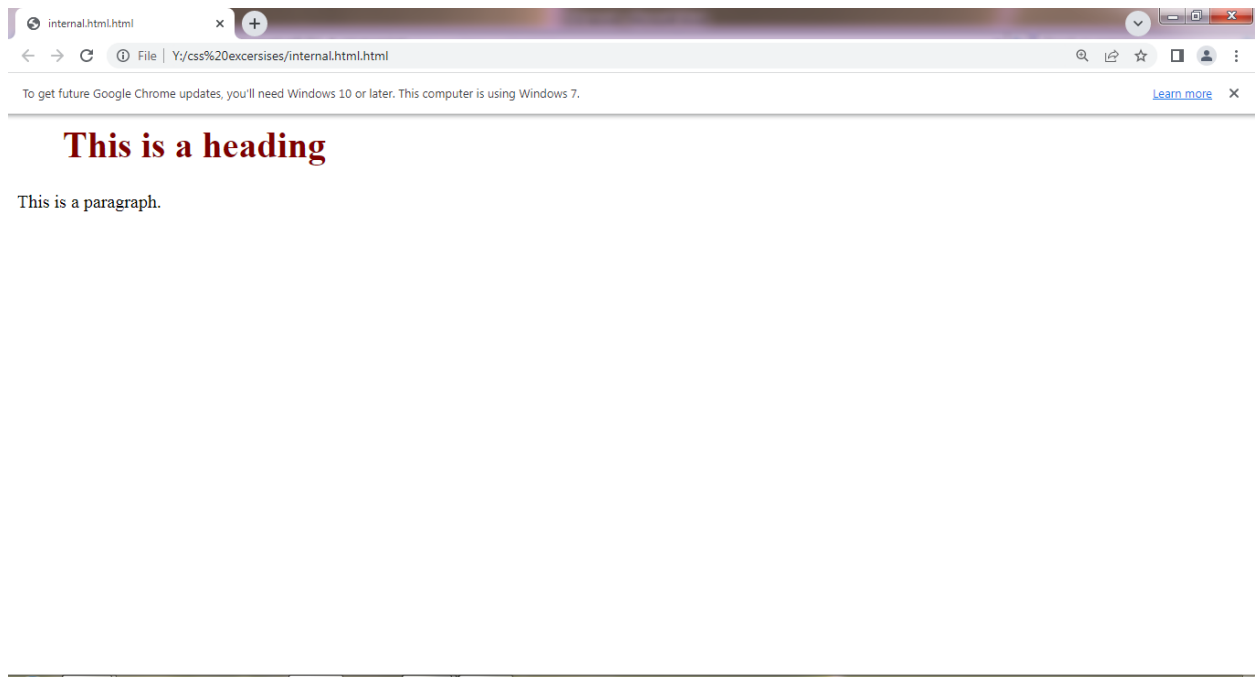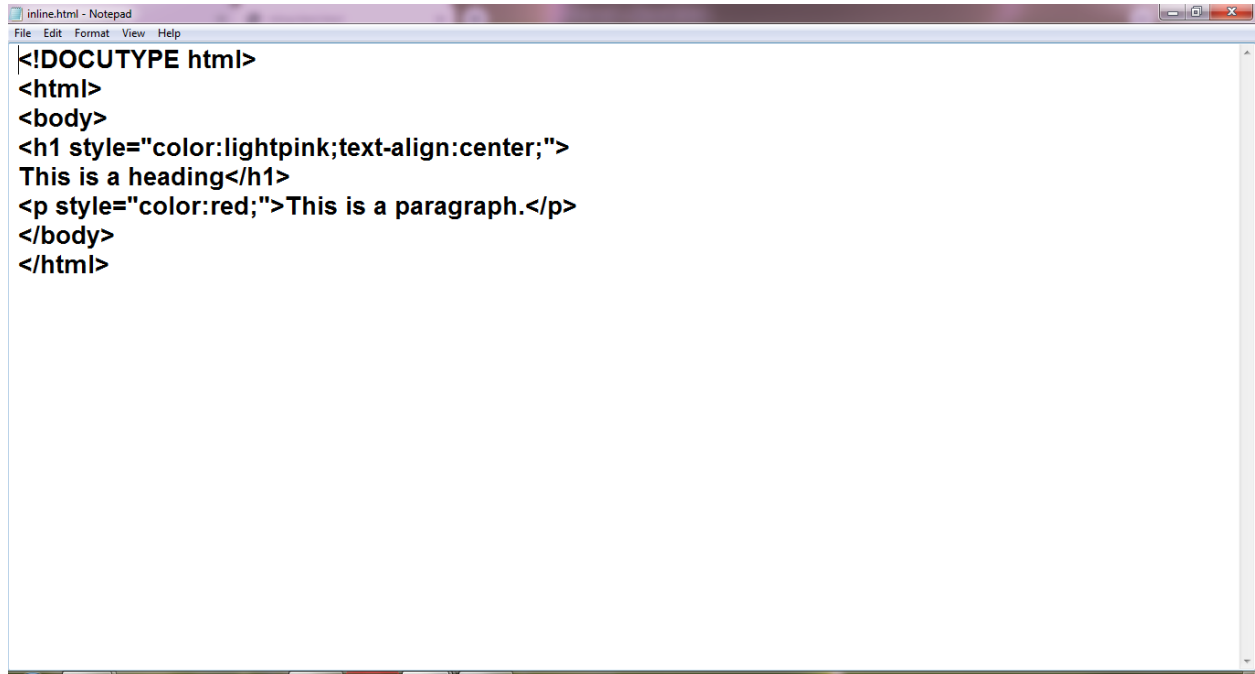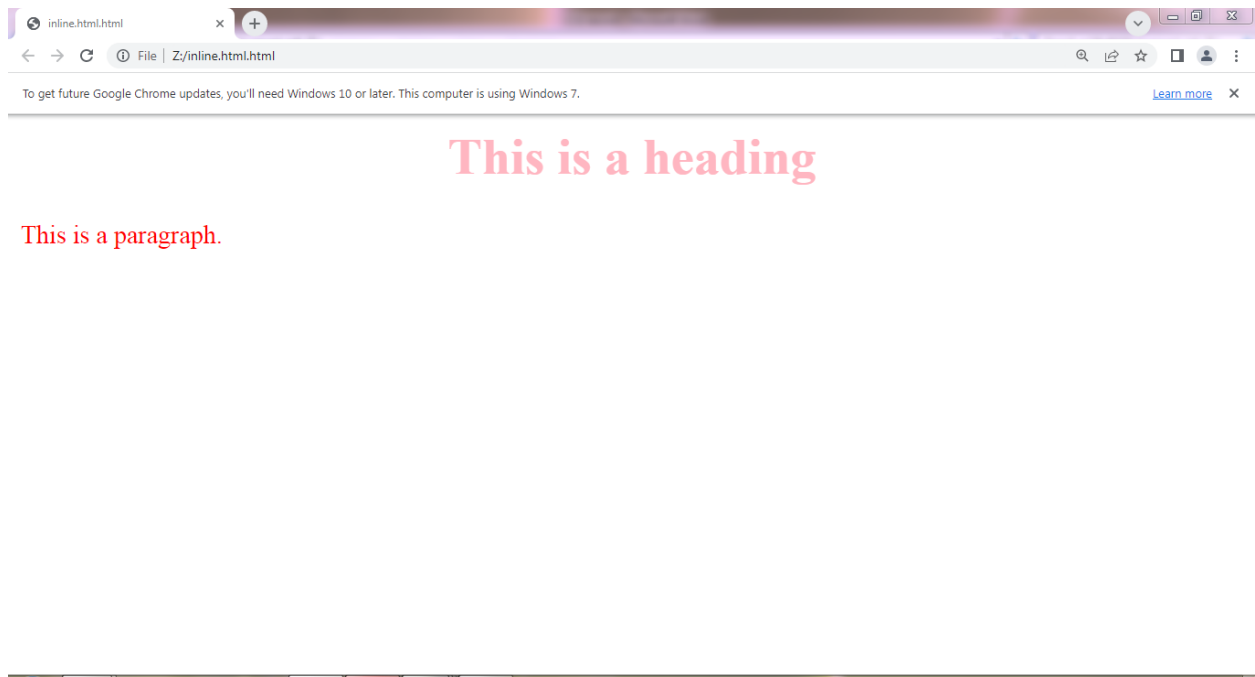
OUTPUT:

This is a heading

This is a paragraph.

EX:4- BACK GROUND COLOR css

INPUT:

```
<!DOCTYPE html>
<html lang="en" "dir"="ltr">
<head>
<meta charset="utf-8">
<title></title>
<style media="screen">
h1{
background-color:lightgreen;
}
div{
background-color:lightblue;
}
p{
background-color:yellow;
}
</style>
</head>
<body>
<h1>hello</h1>
<div class="">
HOW ARE YOU???
```
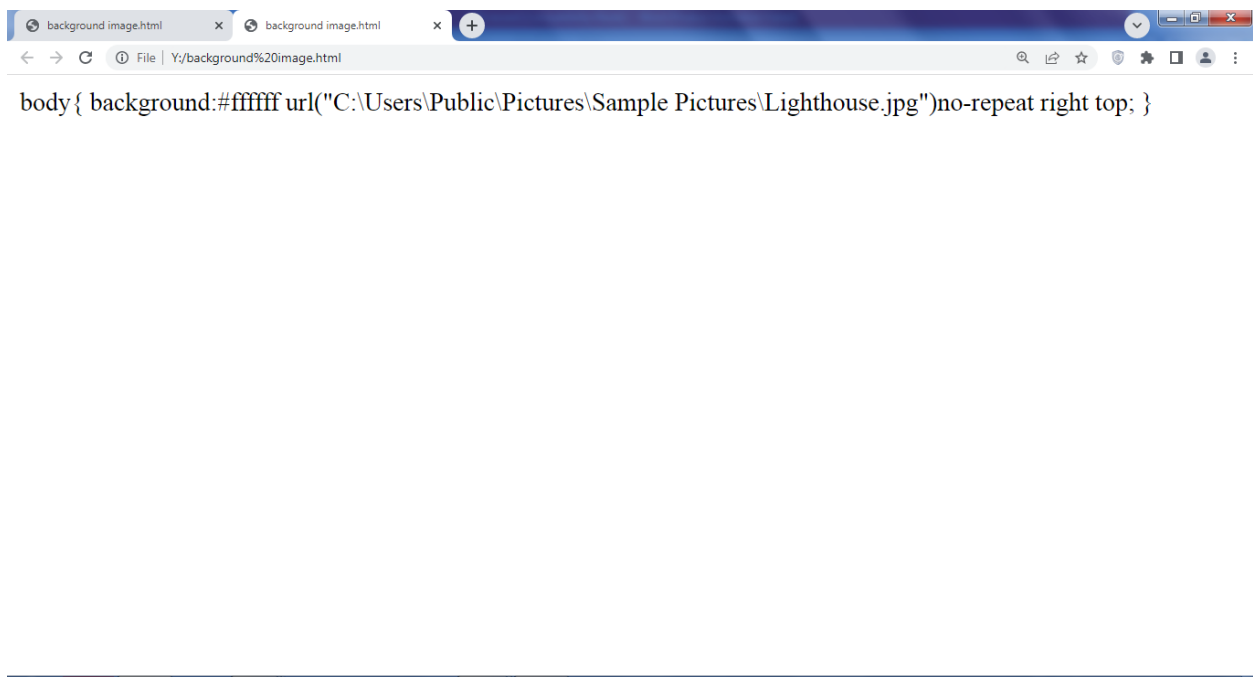
OUTPUT:

hello

HOW ARE YOU???

WELCOME!!
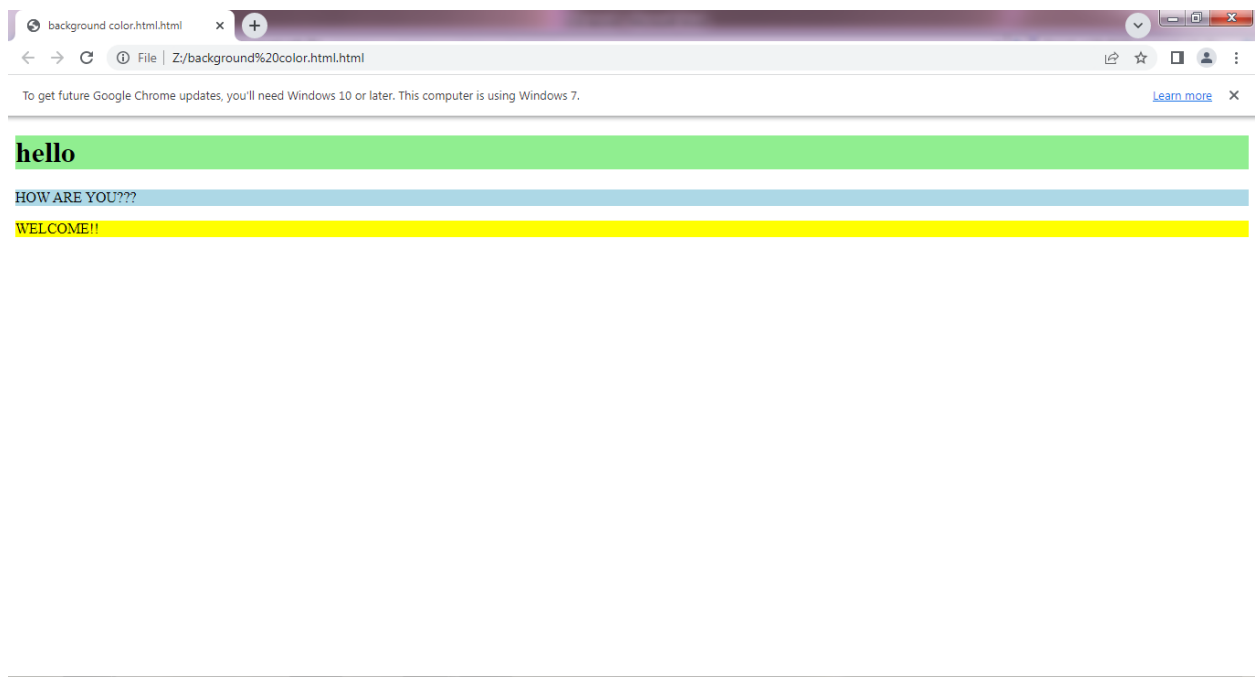
EX:5- BACKGROUND IMAGE css

INPUT:

OUTPUT:

body{ background:#ffffff url("C:\Users\Public\Pictures\Sample Pictures\Lighthouse.jpg")no-repeat right top; }
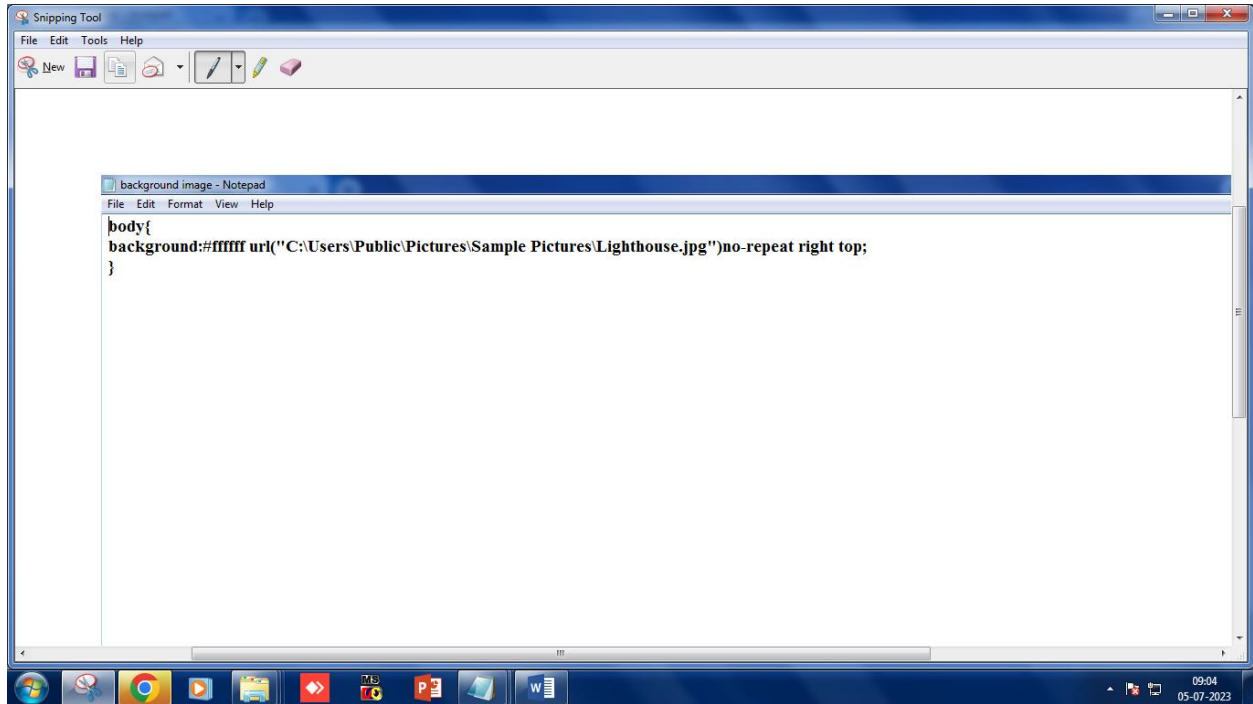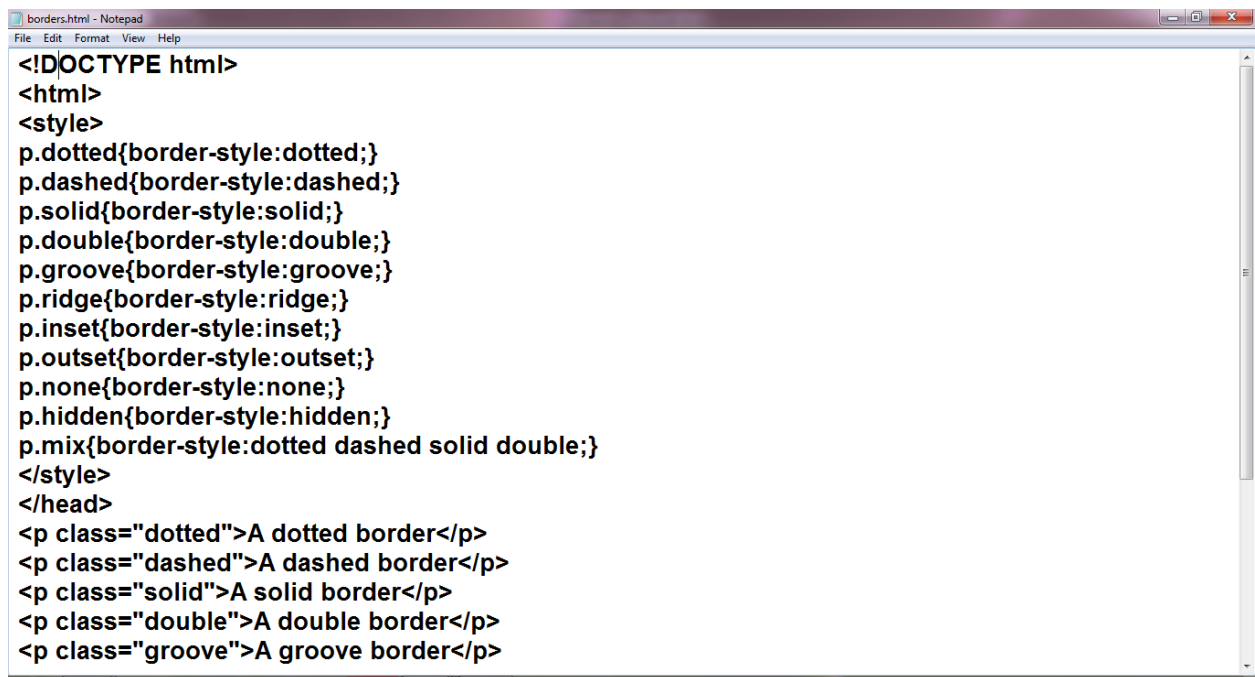
EX:6- BOARDERS css

INPUT:

```
borders.html - Notepad
File  Edit  Format  View  Help
<!DOCTYPE html>
<html>
<style>
p.dotted{border-style:dotted;}
p.dashed{border-style:dashed;}
p.solid{border-style:solid;}
p.double{border-style:double;}
p.groove{border-style:groove;}
p.ridge{border-style:ridge;}
p.inset{border-style:inset;}
p.outset{border-style:outset;}
p.none{border-style:none;}
p.hidden{border-style:hidden;}
p.mix{border-style:dotted dashed solid double;}
</style>
</head>
<p class="dotted">A dotted border</p>
<p class="dashed">A dashed border</p>
<p class="solid">A solid border</p>
<p class="double">A double border</p>
<p class="groove">A groove border</p>
```

OUTPUT:

A dotted border

A dashed border

A solid border

A double border

A groove border

A ridge border

A inset border

A outset border

A none border

A hidden border

A dotted dashed solid double border
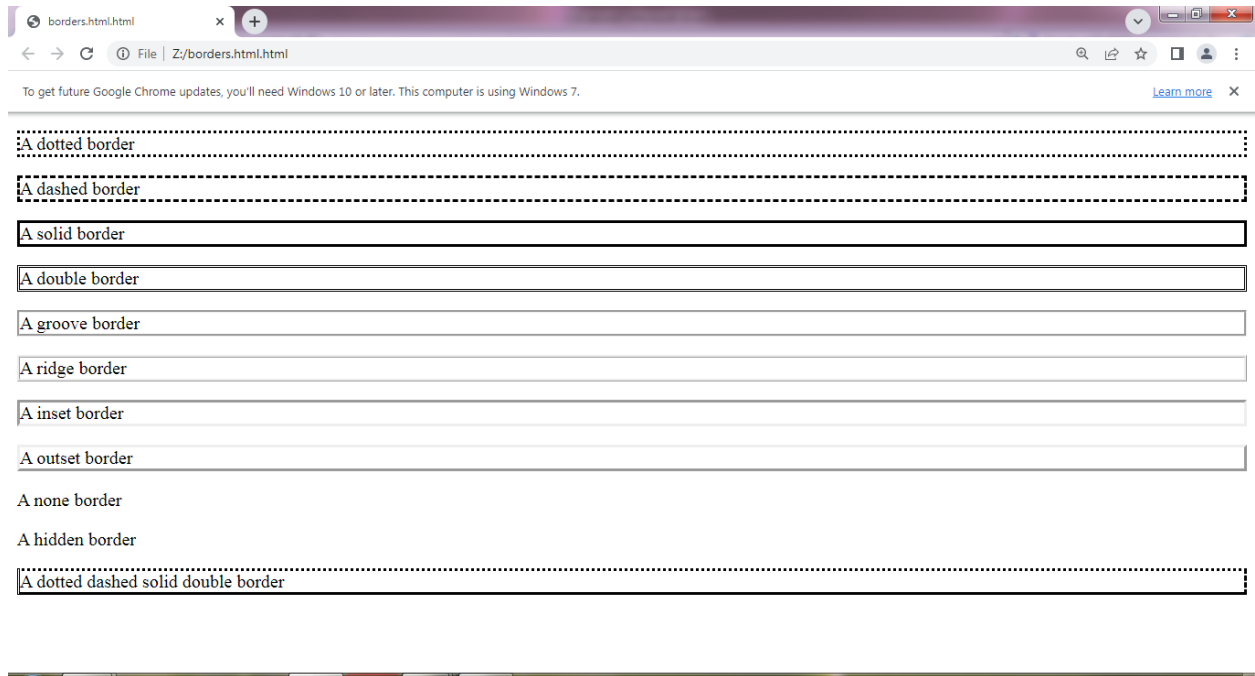
EX:7.1- LIST WITH STYLES css

INPUT:

```
<!DOCTYPE html>
<html>
<head>
<style>
ul.a{list-style-type:circle;}
ul.b{list-style-type:disc;}
ul.c{list-style-type:square;}
ol.d{list-style-type:armenian;}
ol.e{list-style-type:cjk-ideographic;}
ol.f{list-style-type:decimal;}
ol.g{list-style-type:decimal-leading-zero;}
ol.h{list-style-type:katakana-iroha;}
ol.i{list-style-type:lower-greek;}
ol.j{list-style-type:lower-roman;}
</style>
</head>
<body>
<h2> All list style types</h2>
<ul class="a">
<li>circle type</li>
<li>Tea </li>
```

OUTPUT:

All list style types

- circle type
- Tea
- Coca Cola

- disc type
- Tea
- Coca Cola

- square type
- Tea
- Coca Cola

Ա. armenian type
Բ. Tea
Գ. Coca Cola

一、 cjk-ideographic type
二、 Tea
三、 Coca Cola

1. decimal type
2. Tea
3. Coca Cola

01. decimal-leading-zero type
02. Tea
03. Coca Cola

イ、 katakana-iroha type
ロ、 Tea
ハ、 Coca Cola

- disc type
- Tea
- Coca Cola

- square type
- Tea
- Coca Cola

Ա. armenian type
Բ. Tea
Գ. Coca Cola

一、 cjk-ideographic type
二、 Tea
三、 Coca Cola

1. decimal type
2. Tea
3. Coca Cola

01. decimal-leading-zero type
02. Tea
03. Coca Cola

イ、 katakana-iroha type
ロ、 Tea
ハ、 Coca Cola

α. lower-greek type
β. Tea
γ. Coca Cola

i. lower-roman type
ii. Tea
iii. Coca Cola

EX:7.2- LIST WITH COLORS css

INPUT:

```html
<!DOCTYPE html>
<html>
<head>
<style>
ol{
background:#ff9999;
padding:20px;
}
ul{
background:#3399ff;
padding:20px;
}
ol li{
background:#ffe5e5;
color:dark red;
padding:5px;
margin-left:35px;
}
ul li{
background:#cce5ff;
color:dark blue;
```

OUTPUT:
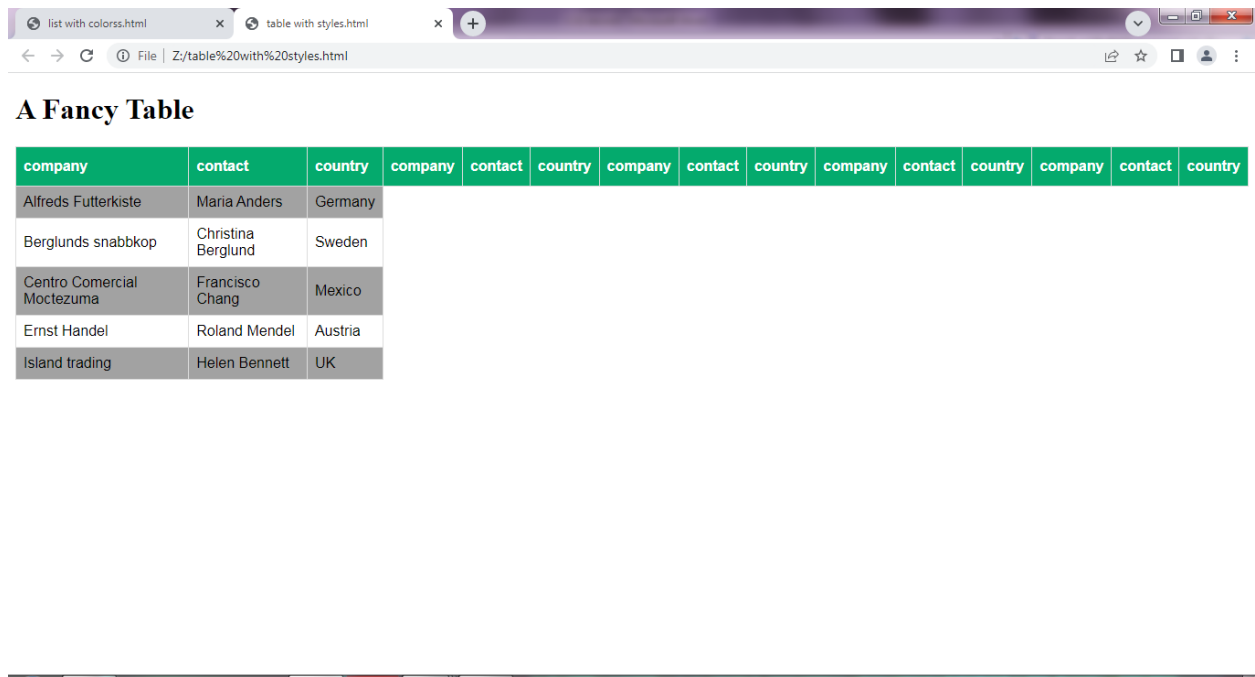
Styling Lists With Colors

1. Coffee
2. Tea
3. Coca Cola

- Coffee
- Tea
- Coca Cola
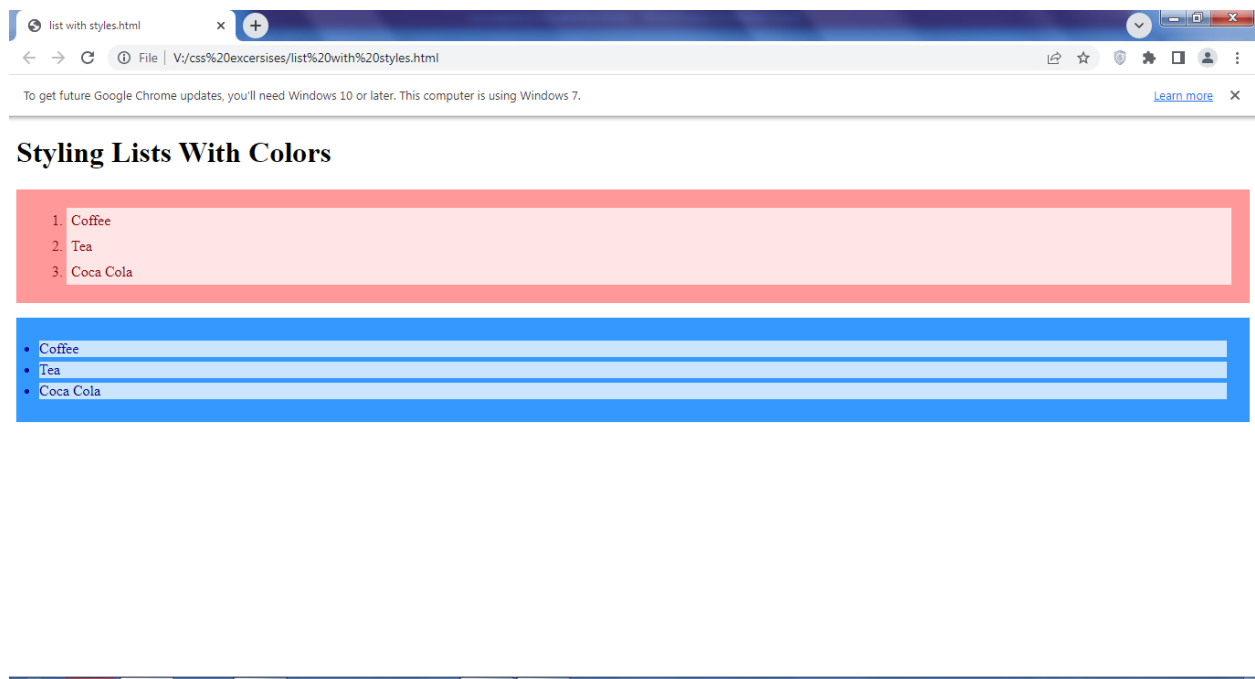
EX:8 TABLE WITH STYLES

INPUT:

```
table with styles - Notepad
File  Edit  Format  View  Help
<!DOCTYPE html>
<html>
<head>
<style>
#customers{
font-family:Arial,Helvetica,sans-serif;
border-collapse:collapse;
width:100%;
}
#customers td,#customers th{
border:1px solid #ddd;
padding:8px;
}
#customers
tr:nth-child(even){background-color:#a2a2a2;}
#customers tr:hover{background-color:#ddd;}
#customers th{
padding-top:12px;
padding-bottom:12px;
text-align:left;
background-color:#04AA6D;
```

OUTPUT:

A Fancy Table

company	contact	country	company	contact	country	company	contact	country	company	contact	country	company	contact	country
Alfreds Futterkiste	Maria Anders	Germany												
Berglunds snabbkop	Christina Berglund	Sweden												
Centro Comercial Moctezuma	Francisco Chang	Mexico												
Ernst Handel	Roland Mendel	Austria												
Island trading	Helen Bennett	UK												

EX:9- FORM TAG

INPUT:

```
<!DOCTYPE html>
<html>
<head>
<style>
*{
box-sizing:border-box;
}
input[type=text],select,text area{
width:100%;
padding:12px;
border:1px solid #ccc;
border-radius:4px;
resize:vertical;
}
label{
padding:12px 12px 12px 0;
display:inline-block;
}
input[type=submit]{
background-color:#04AA6D;
color:white;
```

OUTPUT:

responsive form

resize the browser wimdow to see the effect. when the screen is less than 600px wide, make the two columns stackson top of eachother instead of next to each other.

first name

your name...

last name

country

Australia

subject

write something...

submit

EX:10- VARTIVAL NAVIGATION BAR

INPUT:

File   Edit   Format   View   Help

```
<!doctype HTML>
<html>
<head>
<style>
ul{
list-style-type: none;
margin: 0;
padding: 0;
width: 200px;
background-color: #f1f1f1;
}
li a{
display: block;
color: #000;
padding: 8px 16px;
text-decoration: none;
}
li a.active{
background-color: #04AA6D;
color: white;
}
```

OUTPUT:

Vertical Navigation Bar

In this example, we create an "active" class with a green background color and a white Text. The class is added to the "Home"link.

home

news

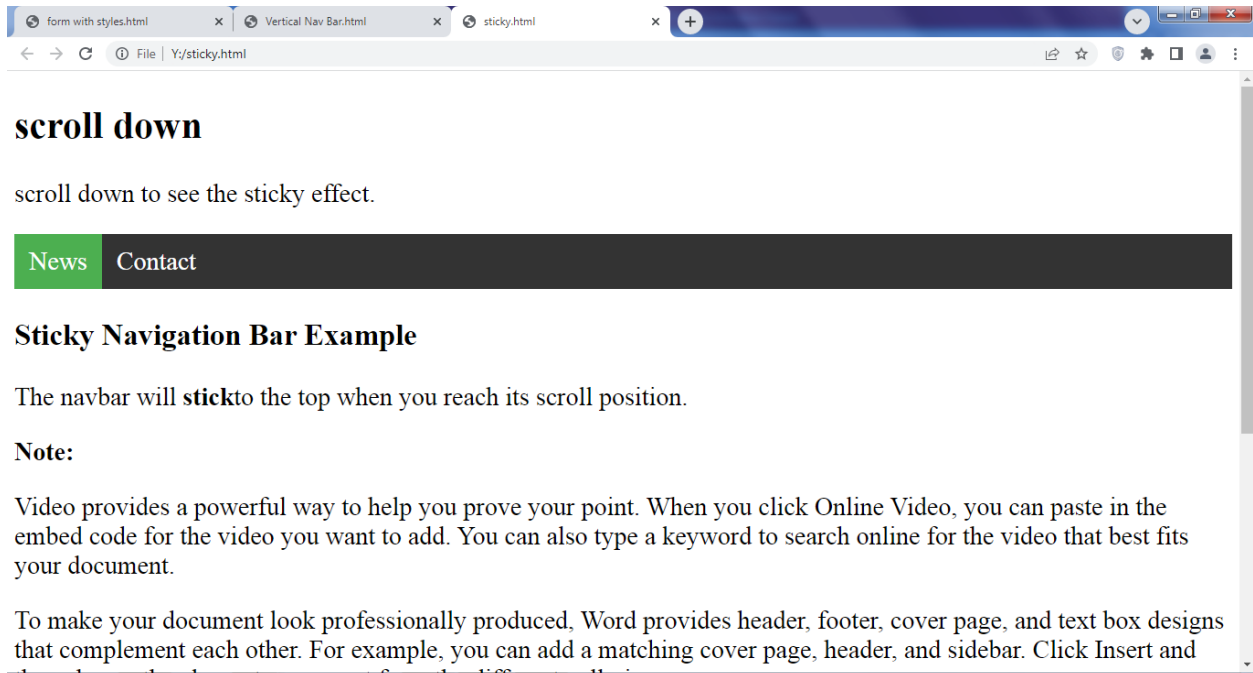contact

about
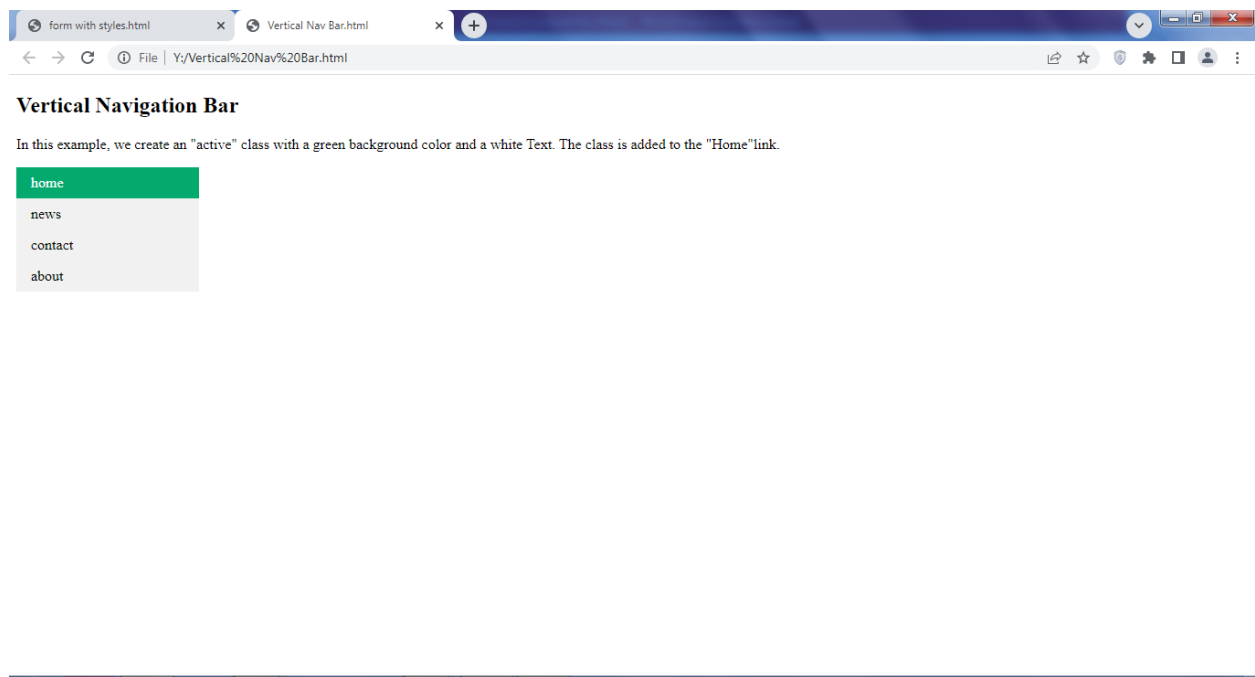
EX:11- STICKY HORIZONTAL NAVIGATION BAR

INPUT:

```
sticky - Notepad
File  Edit  Format  View  Help

<!DOCTYPE html>
<html>
<head>
<style>
body{
font-size:28px;
}
ul{
list-style-type:none;
margin:0;
padding:0;
overflow:hidden;
background-color:#333;
position:-webkit-sticky;/*safari*/
position:sticky;
top:0;
}
li{
float:left;
}
li a{
```

OUTPUT:

scroll down

scroll down to see the sticky effect.
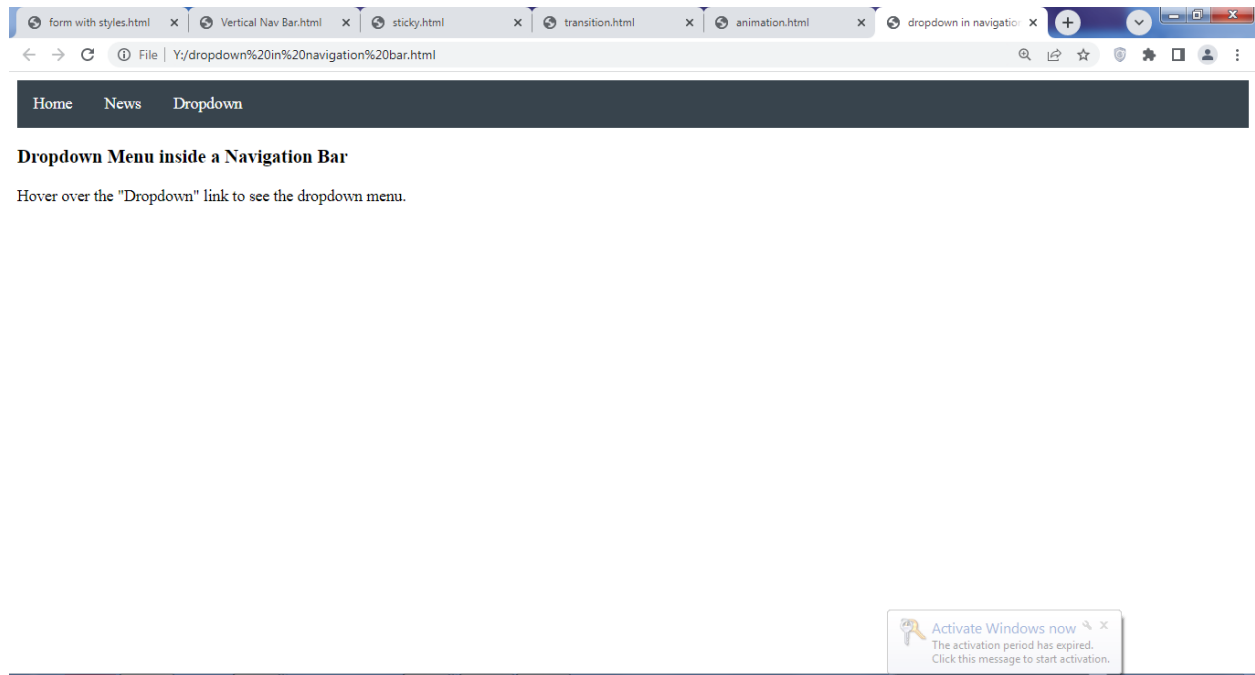
News	Contact

Sticky Navigation Bar Example

The navbar will **stick** to the top when you reach its scroll position.

Note:

Video provides a powerful way to help you prove your point. When you click Online Video, you can paste in the embed code for the video you want to add. You can also type a keyword to search online for the video that best fits your document.

To make your document look professionally produced, Word provides header, footer, cover page, and text box designs that complement each other. For example, you can add a matching cover page, header, and sidebar. Click Insert and

EX:12.1 DROPDOWN IN NAVIGATION BAR

INPUT:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
  background-color:white;
}
ul {
  list-style-type: none;
  margin: 0;
  padding: 0;
  overflow: hidden;
  background-color: #38444d;
}

li {
  float: left;
}

li a, .dropbtn {
  display: inline-block;
```
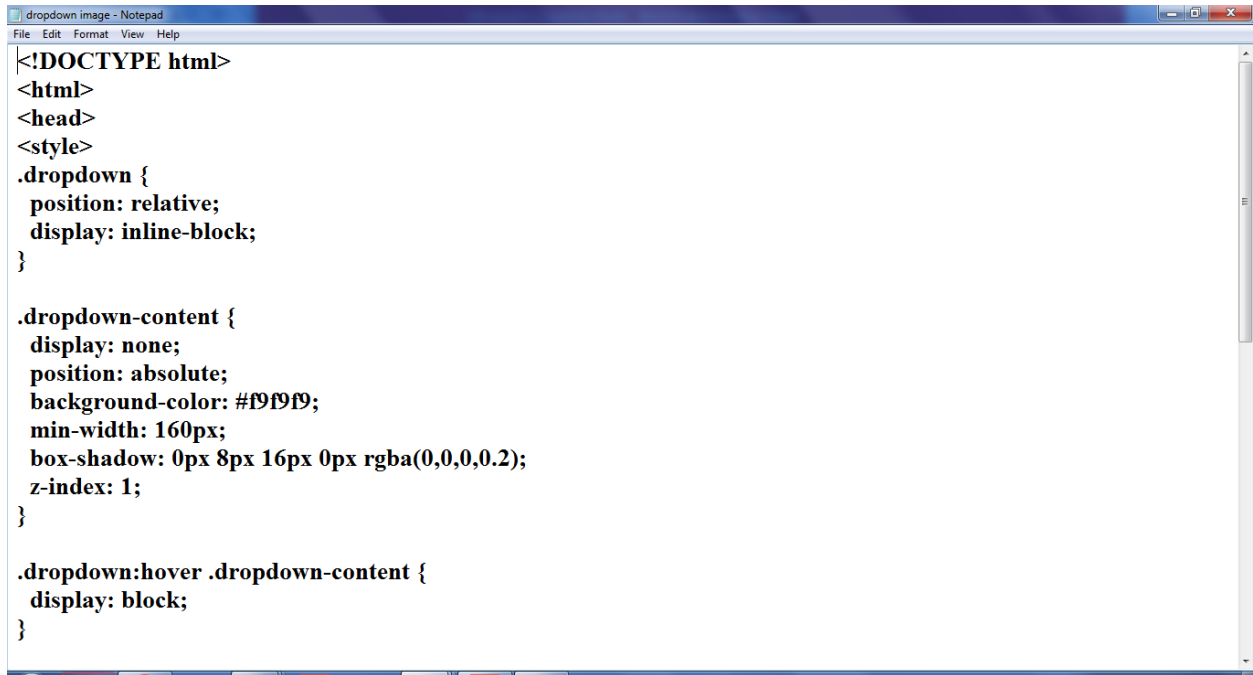
OUTPUT:

Home   News   Dropdown

Dropdown Menu inside a Navigation Bar

Hover over the "Dropdown" link to see the dropdown menu.

EX:12.2- DROP DOWN IMAGE

INPUT:

```
dropdown image - Notepad
File  Edit  Format  View  Help
<!DOCTYPE html>
<html>
<head>
<style>
.dropdown {
  position: relative;
  display: inline-block;
}

.dropdown-content {
  display: none;
  position: absolute;
  background-color: #f9f9f9;
  min-width: 160px;
  box-shadow: 0px 8px 16px 0px rgba(0,0,0,0.2);
  z-index: 1;
}

.dropdown:hover .dropdown-content {
  display: block;
}
}
```
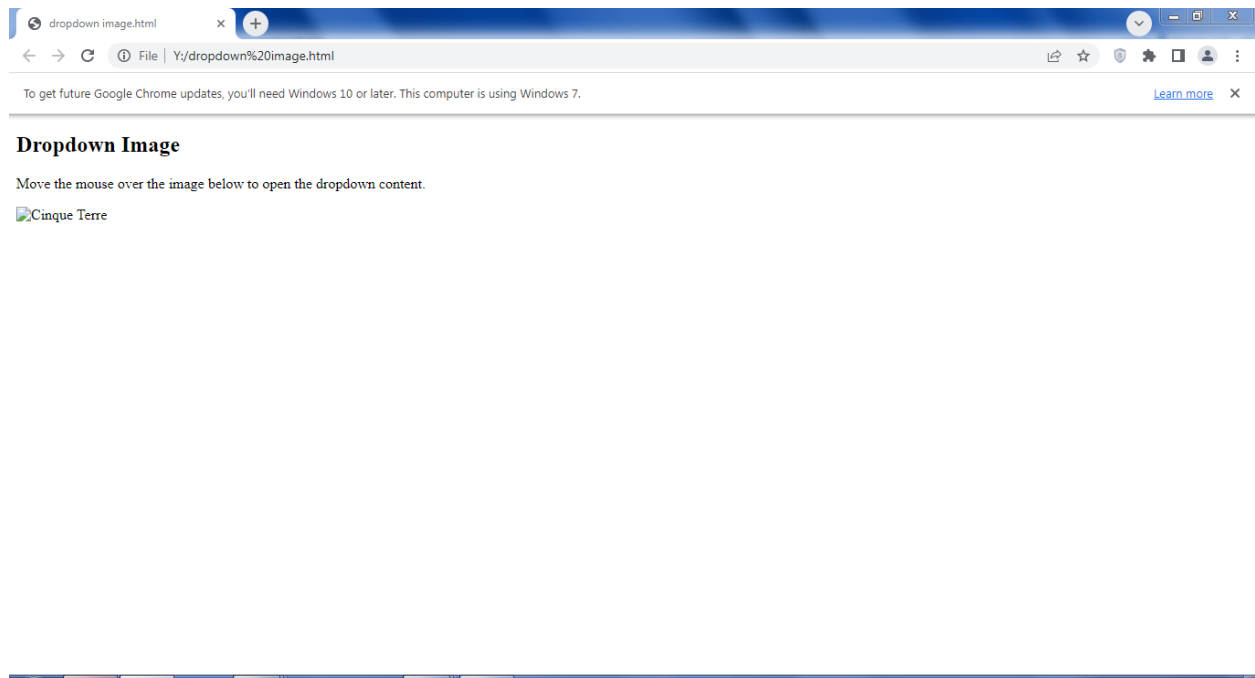
OUTPUT:

Dropdown Image

Move the mouse over the image below to open the dropdown content.

Cinque Terre

EX:13- SHORTHAND PROPERTY

INPUT:

```
<!DOCTYPE html>
<html>
<head>
<style>
div{
width:100px;
height:100px;
background:red;
transition:width 2s linear 1s;
}
div:hover{
width:300px;
}
</style>
</head>
<body>
<h1>Using the Transition shorthand Property</h1>
<p>Hover over the div element below,to see the transition effect:</p>
<div></div>
<p><b>Note:</b>The transition effect has a 1 second delay before starting.</p>
```
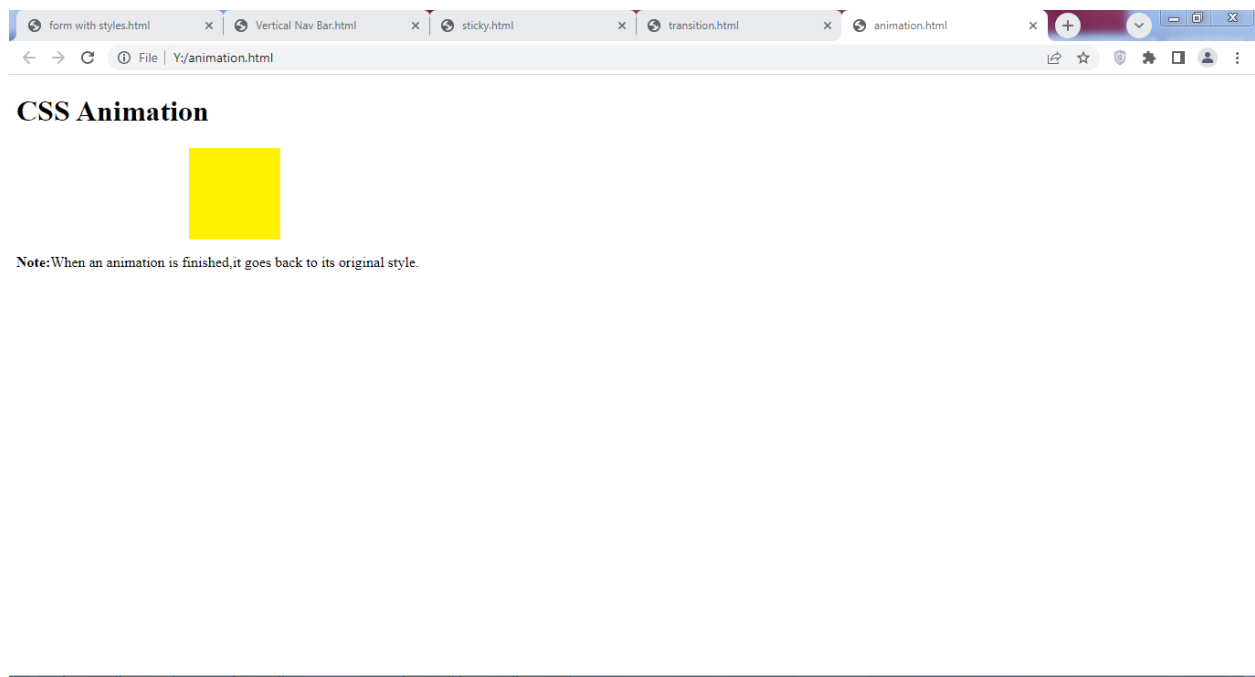
OUTPUT:

Using the Transition shorthand Property

Hover over the div element below,to see the transition effect:

Note: The transition effect has a 1 second delay before starting.
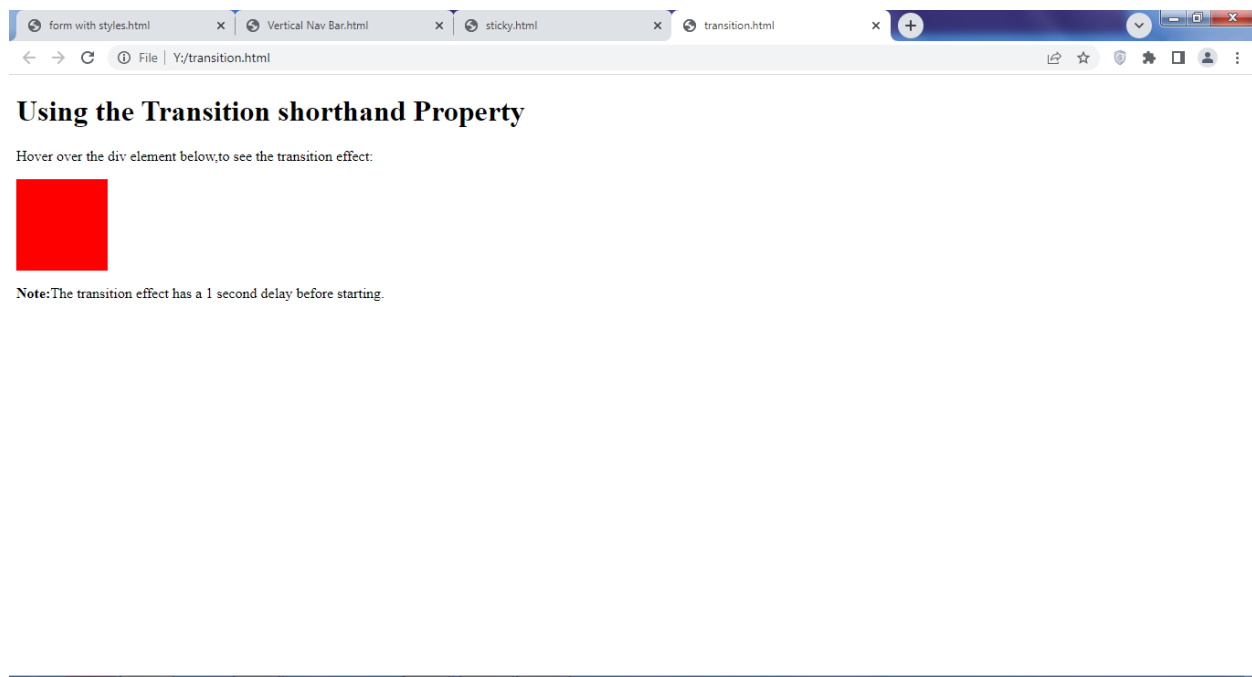
EX:14- ANIMATION

INPUT:

File Edit Format View Help

```
<!DOCTYPE html>
<html>
<head>
<style>
div{
width:100px;
height:100px;
background-color:red;
position:relative;
animation-name:example;
animation-duration:1s;
animation-iteration-count:infinite;
//animation-direction:reverse;
//animation-direction:alternate;
}
@keyframes example{
0% {background-color:red;left:0px;top:0px;}
25% {background-color:yellow;left:200px;top:0px;}
50% {background-color:blue;left:200px;top:200px;}
75% {background-color:green;left:0px;top:200px;}
100% {background-color:red;left:0px;top:0px;}
```

OUTPUT:

form with styles.html   Vertical Nav Bar.html   sticky.html   transition.html   animation.html

File | Y:/animation.html

CSS Animation

Note: When an animation is finished,it goes back to its original style.

THE END