



Atividade API/Postman

SQL

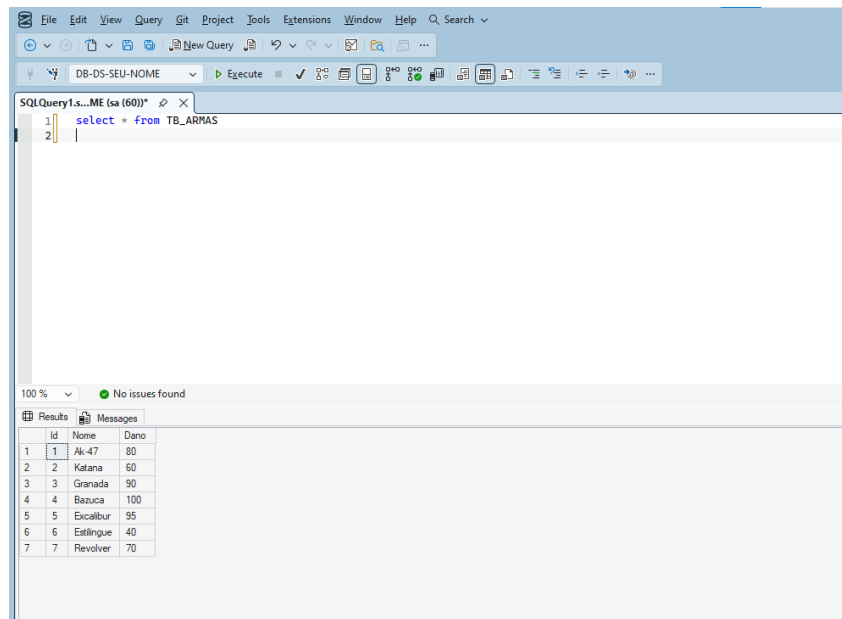

POSTMAN LOCALHOST

GETALL

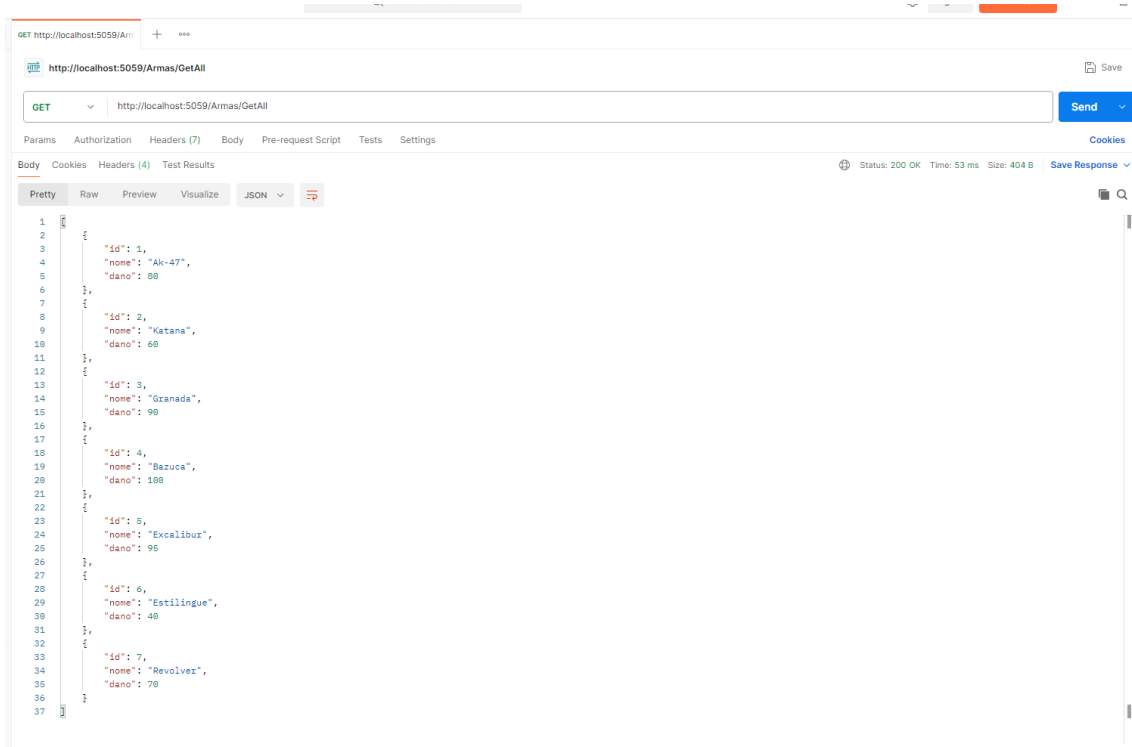

ADD

Postman interface showing a POST request to `http://localhost:5059/Armas`. The request body is a JSON object:

```
{  "nome": "Machado de Guerra",  "dano": 65}
```

The response is a JSON array of weapons, with the last item highlighted by a red arrow:

```
[  {    "id": 3,    "nome": "Granada",    "dano": 90  },  {    "id": 4,    "nome": "Bazuca",    "dano": 100  },  {    "id": 5,    "nome": "Excalibur",    "dano": 95  },  {    "id": 6,    "nome": "Estilingue",    "dano": 40  },  {    "id": 7,    "nome": "Revolver",    "dano": 70  },  {    "id": 8,    "nome": "Machado de Guerra",    "dano": 65  }]
```

POSTMAN SOMEE

UPDATE

Postman interface showing a PUT request to `http://www.jhoekalque.somee.com/RpgApi/Armas`. The request body is a JSON object:

```
{  "id": 6,  "nome": "Estilingue ou Tzabuco",  "dano": 40}
```

The response is a JSON object with the updated weapon details:

```
{  "id": 6,  "nome": "Estilingue ou Tzabuco",  "dano": 40}
```

GETALL

History: Today

- GET http://www.joeikalque.somee.com/RpgApi/Armas/GetAll
- GET http://www.joeikalque.somee.com/RpgApi/Armas/GetAll
- PUT http://www.joeikalque.somee.com/RpgApi/Armas
- PUT http://www.joeikalque.somee.com/RpgApi/Armas
- GET http://www.joeikalque.somee.com/RpgApi/Armas/GetAll

Create collections in Postman

Use collections to save your requests and share them with others.

Create a Collection

GET http://www.joeikalque.somee.com/RpgApi/Armas/GetAll

Params: Authorization Headers (7) Body Pre-request Script Tests Settings

Body: Cookies Headers (5) Test Results

Status: 200 OK Time: 324 ms Size: 449 B Save Response

```
1 {
2   "id": 1,
3   "name": "Ak-47",
4   "dano": 88
5 },
6 {
7   "id": 2,
8   "name": "Katana",
9   "dano": 60
10 },
11 {
12   "id": 3,
13   "name": "Granada",
14   "dano": 90
15 },
16 {
17   "id": 4,
18   "name": "Babuka",
19   "dano": 100
20 },
21 {
22   "id": 5,
23   "name": "Excalibur",
24   "dano": 95
25 },
26 {
27   "id": 6,
28   "name": "Estilingue ou Tzabuco",
29   "dano": 40
30 },
31 {
32   "id": 7,
33   "name": "Revolver",
34   "dano": 70
35 }
36 }
```

ID

History: Today

- GET http://www.joeikalque.somee.com/RpgApi/Armas/6
- GET http://www.joeikalque.somee.com/RpgApi/Armas/GetAll
- PUT http://www.joeikalque.somee.com/RpgApi/Armas
- PUT http://www.joeikalque.somee.com/RpgApi/Armas
- GET http://www.joeikalque.somee.com/RpgApi/Armas/GetAll

Create collections in Postman

Use collections to save your requests and share them with others.

Create a Collection

GET http://www.joeikalque.somee.com/RpgApi/Armas/6



Params: Authorization Headers (7) Body Pre-request Script Tests Settings

Body: Cookies Headers (5) Test Results

Status: 200 OK Time: 907 ms Size: 231 B Save Response

```
1 {
2   "id": 6,
3   "name": "Estilingue ou Tzabuco",
4   "dano": 40
5 }
```

DELETE

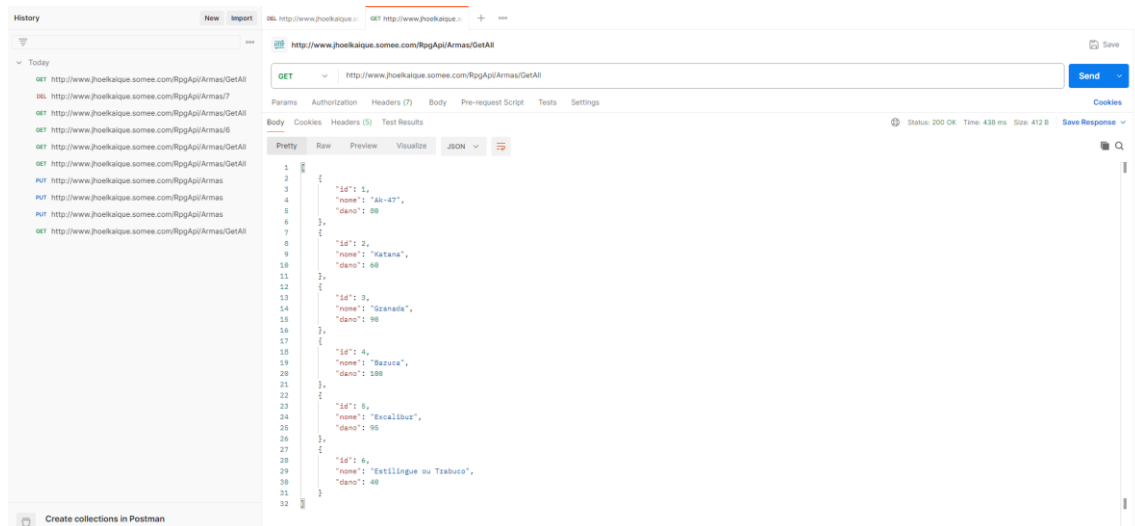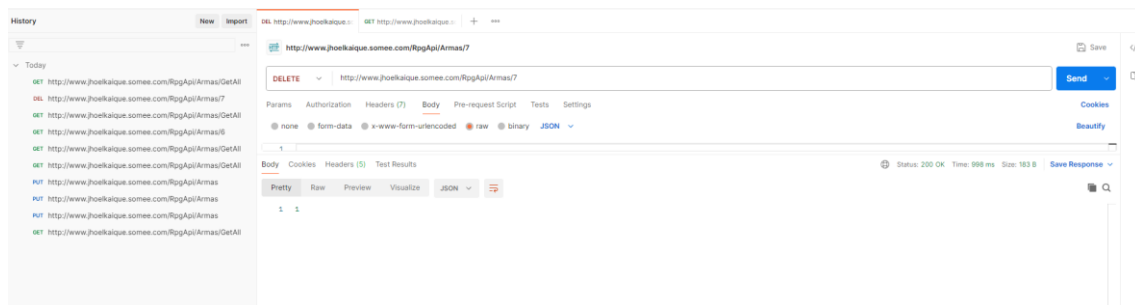

ENDPOINT

```
GET http://www.jhoelkaique.somee.com/RpgApi/Armas/GetAll
DEL http://www.jhoelkaique.somee.com/RpgApi/Armas/7
GET http://www.jhoelkaique.somee.com/RpgApi/Armas/GetAll
GET http://www.jhoelkaique.somee.com/RpgApi/Armas/6
GET http://www.jhoelkaique.somee.com/RpgApi/Armas/GetAll
GET http://www.jhoelkaique.somee.com/RpgApi/Armas/GetAll
PUT http://www.jhoelkaique.somee.com/RpgApi/Armas
PUT http://www.jhoelkaique.somee.com/RpgApi/Armas
PUT http://www.jhoelkaique.somee.com/RpgApi/Armas
GET http://www.jhoelkaique.somee.com/RpgApi/Armas/GetAll
```