

Tang

0.1

Generated by Doxygen 1.9.1



---

<b>1 Tang: A Template Language</b>	<b>1</b>
1.1 Quick Description	1
1.2 Features	1
1.3 License	1
<b>2 Hierarchical Index</b>	<b>3</b>
2.1 Class Hierarchy	3
<b>3 Class Index</b>	<b>5</b>
3.1 Class List	5
<b>4 File Index</b>	<b>9</b>
4.1 File List	9
<b>5 Class Documentation</b>	<b>15</b>
5.1 Tang::AstNode Class Reference	15
5.1.1 Detailed Description	18
5.1.2 Member Enumeration Documentation	18
5.1.2.1 PreprocessState	18
5.1.3 Constructor & Destructor Documentation	18
5.1.3.1 AstNode()	18
5.1.4 Member Function Documentation	19
5.1.4.1 compile()	19
5.1.4.2 compilePreprocess()	19
5.1.4.3 dump()	20
5.2 Tang::AstNodeArray Class Reference	21
5.2.1 Detailed Description	23
5.2.2 Member Enumeration Documentation	23
5.2.2.1 PreprocessState	23
5.2.3 Constructor & Destructor Documentation	23
5.2.3.1 AstNodeArray()	23
5.2.4 Member Function Documentation	24
5.2.4.1 compile()	24
5.2.4.2 compilePreprocess()	24
5.2.4.3 dump()	25
5.3 Tang::AstNodeAssign Class Reference	25
5.3.1 Detailed Description	27
5.3.2 Member Enumeration Documentation	27
5.3.2.1 PreprocessState	27
5.3.3 Constructor & Destructor Documentation	27
5.3.3.1 AstNodeAssign()	27
5.3.4 Member Function Documentation	28
5.3.4.1 compile()	28
5.3.4.2 compilePreprocess()	29

---

5.3.4.3 <code>dump()</code>	29
5.4 <code>Tang::AstNodeBinary</code> Class Reference	29
5.4.1 Detailed Description	32
5.4.2 Member Enumeration Documentation	32
5.4.2.1 <code>Operation</code>	32
5.4.2.2 <code>PreprocessState</code>	33
5.4.3 Constructor & Destructor Documentation	33
5.4.3.1 <code>AstNodeBinary()</code>	33
5.4.4 Member Function Documentation	33
5.4.4.1 <code>compile()</code>	33
5.4.4.2 <code>compilePreprocess()</code>	34
5.4.4.3 <code>dump()</code>	34
5.5 <code>Tang::AstNodeBlock</code> Class Reference	35
5.5.1 Detailed Description	37
5.5.2 Member Enumeration Documentation	37
5.5.2.1 <code>PreprocessState</code>	37
5.5.3 Constructor & Destructor Documentation	37
5.5.3.1 <code>AstNodeBlock()</code>	37
5.5.4 Member Function Documentation	38
5.5.4.1 <code>compile()</code>	38
5.5.4.2 <code>compilePreprocess()</code>	38
5.5.4.3 <code>dump()</code>	39
5.6 <code>Tang::AstNodeBoolean</code> Class Reference	39
5.6.1 Detailed Description	41
5.6.2 Member Enumeration Documentation	41
5.6.2.1 <code>PreprocessState</code>	41
5.6.3 Constructor & Destructor Documentation	41
5.6.3.1 <code>AstNodeBoolean()</code>	41
5.6.4 Member Function Documentation	42
5.6.4.1 <code>compile()</code>	42
5.6.4.2 <code>compilePreprocess()</code>	42
5.6.4.3 <code>dump()</code>	43
5.7 <code>Tang::AstNodeBreak</code> Class Reference	43
5.7.1 Detailed Description	45
5.7.2 Member Enumeration Documentation	45
5.7.2.1 <code>PreprocessState</code>	45
5.7.3 Constructor & Destructor Documentation	45
5.7.3.1 <code>AstNodeBreak()</code>	45
5.7.4 Member Function Documentation	45
5.7.4.1 <code>compile()</code>	46
5.7.4.2 <code>compilePreprocess()</code>	46
5.7.4.3 <code>dump()</code>	47

---

5.8 Tang::AstNodeCast Class Reference . . . . .	47
5.8.1 Detailed Description . . . . .	49
5.8.2 Member Enumeration Documentation . . . . .	49
5.8.2.1 PreprocessState . . . . .	49
5.8.2.2 Type . . . . .	49
5.8.3 Constructor & Destructor Documentation . . . . .	50
5.8.3.1 AstNodeCast() . . . . .	50
5.8.4 Member Function Documentation . . . . .	50
5.8.4.1 compile() . . . . .	50
5.8.4.2 compilePreprocess() . . . . .	51
5.8.4.3 dump() . . . . .	51
5.9 Tang::AstNodeContinue Class Reference . . . . .	51
5.9.1 Detailed Description . . . . .	53
5.9.2 Member Enumeration Documentation . . . . .	53
5.9.2.1 PreprocessState . . . . .	53
5.9.3 Constructor & Destructor Documentation . . . . .	53
5.9.3.1 AstNodeContinue() . . . . .	54
5.9.4 Member Function Documentation . . . . .	54
5.9.4.1 compile() . . . . .	54
5.9.4.2 compilePreprocess() . . . . .	55
5.9.4.3 dump() . . . . .	55
5.10 Tang::AstNodeDoWhile Class Reference . . . . .	55
5.10.1 Detailed Description . . . . .	58
5.10.2 Member Enumeration Documentation . . . . .	58
5.10.2.1 PreprocessState . . . . .	58
5.10.3 Constructor & Destructor Documentation . . . . .	58
5.10.3.1 AstNodeDoWhile() . . . . .	58
5.10.4 Member Function Documentation . . . . .	59
5.10.4.1 compile() . . . . .	59
5.10.4.2 compilePreprocess() . . . . .	59
5.10.4.3 dump() . . . . .	60
5.11 Tang::AstNodeFloat Class Reference . . . . .	60
5.11.1 Detailed Description . . . . .	62
5.11.2 Member Enumeration Documentation . . . . .	62
5.11.2.1 PreprocessState . . . . .	62
5.11.3 Constructor & Destructor Documentation . . . . .	62
5.11.3.1 AstNodeFloat() . . . . .	62
5.11.4 Member Function Documentation . . . . .	63
5.11.4.1 compile() . . . . .	63
5.11.4.2 compilePreprocess() . . . . .	63
5.11.4.3 dump() . . . . .	64
5.12 Tang::AstNodeFor Class Reference . . . . .	64

5.12.1 Detailed Description . . . . .	66
5.12.2 Member Enumeration Documentation . . . . .	66
5.12.2.1 PreprocessState . . . . .	66
5.12.3 Constructor & Destructor Documentation . . . . .	67
5.12.3.1 AstNodeFor() . . . . .	67
5.12.4 Member Function Documentation . . . . .	67
5.12.4.1 compile() . . . . .	67
5.12.4.2 compilePreprocess() . . . . .	68
5.12.4.3 dump() . . . . .	68
5.13 Tang::AstNodeFunctionCall Class Reference . . . . .	69
5.13.1 Detailed Description . . . . .	70
5.13.2 Member Enumeration Documentation . . . . .	70
5.13.2.1 PreprocessState . . . . .	70
5.13.3 Constructor & Destructor Documentation . . . . .	71
5.13.3.1 AstNodeFunctionCall() . . . . .	71
5.13.4 Member Function Documentation . . . . .	71
5.13.4.1 compile() . . . . .	71
5.13.4.2 compilePreprocess() . . . . .	72
5.13.4.3 dump() . . . . .	72
5.14 Tang::AstNodeFunctionDeclaration Class Reference . . . . .	72
5.14.1 Detailed Description . . . . .	74
5.14.2 Member Enumeration Documentation . . . . .	74
5.14.2.1 PreprocessState . . . . .	74
5.14.3 Constructor & Destructor Documentation . . . . .	74
5.14.3.1 AstNodeFunctionDeclaration() . . . . .	74
5.14.4 Member Function Documentation . . . . .	75
5.14.4.1 compile() . . . . .	75
5.14.4.2 compilePreprocess() . . . . .	75
5.14.4.3 dump() . . . . .	76
5.15 Tang::AstNodelIdentifier Class Reference . . . . .	76
5.15.1 Detailed Description . . . . .	78
5.15.2 Member Enumeration Documentation . . . . .	78
5.15.2.1 PreprocessState . . . . .	78
5.15.3 Constructor & Destructor Documentation . . . . .	79
5.15.3.1 AstNodelIdentifier() . . . . .	79
5.15.4 Member Function Documentation . . . . .	79
5.15.4.1 compile() . . . . .	79
5.15.4.2 compilePreprocess() . . . . .	80
5.15.4.3 dump() . . . . .	81
5.16 Tang::AstNodelElse Class Reference . . . . .	81
5.16.1 Detailed Description . . . . .	83
5.16.2 Member Enumeration Documentation . . . . .	83

---

5.16.2.1 PreprocessState . . . . .	83
5.16.3 Constructor & Destructor Documentation . . . . .	84
5.16.3.1 AstNodeIfElse() [1/2] . . . . .	84
5.16.3.2 AstNodeIfElse() [2/2] . . . . .	84
5.16.4 Member Function Documentation . . . . .	84
5.16.4.1 compile() . . . . .	84
5.16.4.2 compilePreprocess() . . . . .	85
5.16.4.3 dump() . . . . .	85
5.17 Tang::AstNodeIndex Class Reference . . . . .	86
5.17.1 Detailed Description . . . . .	88
5.17.2 Member Enumeration Documentation . . . . .	88
5.17.2.1 PreprocessState . . . . .	88
5.17.3 Constructor & Destructor Documentation . . . . .	88
5.17.3.1 AstNodeIndex() . . . . .	89
5.17.4 Member Function Documentation . . . . .	89
5.17.4.1 compile() . . . . .	89
5.17.4.2 compilePreprocess() . . . . .	90
5.17.4.3 dump() . . . . .	90
5.17.4.4 getCollection() . . . . .	90
5.17.4.5 getIndex() . . . . .	91
5.18 Tang::AstNodeInteger Class Reference . . . . .	91
5.18.1 Detailed Description . . . . .	93
5.18.2 Member Enumeration Documentation . . . . .	93
5.18.2.1 PreprocessState . . . . .	93
5.18.3 Constructor & Destructor Documentation . . . . .	93
5.18.3.1 AstNodeInteger() . . . . .	93
5.18.4 Member Function Documentation . . . . .	94
5.18.4.1 compile() . . . . .	94
5.18.4.2 compilePreprocess() . . . . .	94
5.18.4.3 dump() . . . . .	95
5.19 Tang::AstNodeLibrary Class Reference . . . . .	95
5.19.1 Detailed Description . . . . .	97
5.19.2 Member Enumeration Documentation . . . . .	97
5.19.2.1 PreprocessState . . . . .	97
5.19.3 Constructor & Destructor Documentation . . . . .	97
5.19.3.1 AstNodeLibrary() . . . . .	97
5.19.4 Member Function Documentation . . . . .	98
5.19.4.1 compile() . . . . .	98
5.19.4.2 compilePreprocess() . . . . .	98
5.19.4.3 dump() . . . . .	99
5.20 Tang::AstNodeMap Class Reference . . . . .	99
5.20.1 Detailed Description . . . . .	101

5.20.2 Member Enumeration Documentation . . . . .	101
5.20.2.1 PreprocessState . . . . .	101
5.20.3 Constructor & Destructor Documentation . . . . .	101
5.20.3.1 AstNodeMap() . . . . .	101
5.20.4 Member Function Documentation . . . . .	101
5.20.4.1 compile() . . . . .	102
5.20.4.2 compilePreprocess() . . . . .	102
5.20.4.3 dump() . . . . .	103
5.21 Tang::AstNodePeriod Class Reference . . . . .	103
5.21.1 Detailed Description . . . . .	105
5.21.2 Member Enumeration Documentation . . . . .	105
5.21.2.1 PreprocessState . . . . .	105
5.21.3 Constructor & Destructor Documentation . . . . .	105
5.21.3.1 AstNodePeriod() . . . . .	105
5.21.4 Member Function Documentation . . . . .	106
5.21.4.1 compile() . . . . .	106
5.21.4.2 compilePreprocess() . . . . .	106
5.21.4.3 dump() . . . . .	107
5.22 Tang::AstNodePrint Class Reference . . . . .	107
5.22.1 Detailed Description . . . . .	109
5.22.2 Member Enumeration Documentation . . . . .	109
5.22.2.1 PreprocessState . . . . .	109
5.22.2.2 Type . . . . .	110
5.22.3 Constructor & Destructor Documentation . . . . .	110
5.22.3.1 AstNodePrint() . . . . .	110
5.22.4 Member Function Documentation . . . . .	110
5.22.4.1 compile() . . . . .	110
5.22.4.2 compilePreprocess() . . . . .	111
5.22.4.3 dump() . . . . .	111
5.23 Tang::AstNodeRangedFor Class Reference . . . . .	112
5.23.1 Detailed Description . . . . .	113
5.23.2 Member Enumeration Documentation . . . . .	113
5.23.2.1 PreprocessState . . . . .	113
5.23.3 Constructor & Destructor Documentation . . . . .	114
5.23.3.1 AstNodeRangedFor() . . . . .	114
5.23.4 Member Function Documentation . . . . .	114
5.23.4.1 compile() . . . . .	114
5.23.4.2 compilePreprocess() . . . . .	115
5.23.4.3 dump() . . . . .	116
5.24 Tang::AstNodeReturn Class Reference . . . . .	116
5.24.1 Detailed Description . . . . .	118
5.24.2 Member Enumeration Documentation . . . . .	118

5.24.2.1 PreprocessState . . . . .	118
5.24.3 Constructor & Destructor Documentation . . . . .	118
5.24.3.1 AstNodeReturn() . . . . .	118
5.24.4 Member Function Documentation . . . . .	119
5.24.4.1 compile() . . . . .	119
5.24.4.2 compilePreprocess() . . . . .	119
5.24.4.3 dump() . . . . .	120
5.25 Tang::AstNodeSlice Class Reference . . . . .	120
5.25.1 Detailed Description . . . . .	122
5.25.2 Member Enumeration Documentation . . . . .	122
5.25.2.1 PreprocessState . . . . .	122
5.25.3 Constructor & Destructor Documentation . . . . .	123
5.25.3.1 AstNodeSlice() . . . . .	123
5.25.4 Member Function Documentation . . . . .	123
5.25.4.1 compile() . . . . .	123
5.25.4.2 compilePreprocess() . . . . .	124
5.25.4.3 dump() . . . . .	124
5.26 Tang::AstNodeString Class Reference . . . . .	125
5.26.1 Detailed Description . . . . .	127
5.26.2 Member Enumeration Documentation . . . . .	127
5.26.2.1 PreprocessState . . . . .	127
5.26.3 Constructor & Destructor Documentation . . . . .	127
5.26.3.1 AstNodeString() [1/2] . . . . .	128
5.26.3.2 AstNodeString() [2/2] . . . . .	128
5.26.4 Member Function Documentation . . . . .	128
5.26.4.1 compile() . . . . .	128
5.26.4.2 compileLiteral() . . . . .	129
5.26.4.3 compilePreprocess() . . . . .	129
5.26.4.4 dump() . . . . .	130
5.27 Tang::AstNodeTernary Class Reference . . . . .	130
5.27.1 Detailed Description . . . . .	133
5.27.2 Member Enumeration Documentation . . . . .	133
5.27.2.1 PreprocessState . . . . .	133
5.27.3 Constructor & Destructor Documentation . . . . .	133
5.27.3.1 AstNodeTernary() . . . . .	134
5.27.4 Member Function Documentation . . . . .	134
5.27.4.1 compile() . . . . .	134
5.27.4.2 compilePreprocess() . . . . .	135
5.27.4.3 dump() . . . . .	135
5.28 Tang::AstNodeUnary Class Reference . . . . .	135
5.28.1 Detailed Description . . . . .	137
5.28.2 Member Enumeration Documentation . . . . .	137

5.28.2.1 Operator . . . . .	137
5.28.2.2 PreprocessState . . . . .	138
5.28.3 Constructor & Destructor Documentation . . . . .	138
5.28.3.1 AstNodeUnary() . . . . .	138
5.28.4 Member Function Documentation . . . . .	138
5.28.4.1 compile() . . . . .	138
5.28.4.2 compilePreprocess() . . . . .	140
5.28.4.3 dump() . . . . .	140
5.29 Tang::AstNodeUse Class Reference . . . . .	141
5.29.1 Detailed Description . . . . .	143
5.29.2 Member Enumeration Documentation . . . . .	143
5.29.2.1 PreprocessState . . . . .	143
5.29.3 Constructor & Destructor Documentation . . . . .	143
5.29.3.1 AstNodeUse() . . . . .	143
5.29.4 Member Function Documentation . . . . .	144
5.29.4.1 compile() . . . . .	144
5.29.4.2 compilePreprocess() . . . . .	144
5.29.4.3 dump() . . . . .	145
5.30 Tang::AstNodeWhile Class Reference . . . . .	145
5.30.1 Detailed Description . . . . .	148
5.30.2 Member Enumeration Documentation . . . . .	148
5.30.2.1 PreprocessState . . . . .	148
5.30.3 Constructor & Destructor Documentation . . . . .	148
5.30.3.1 AstNodeWhile() . . . . .	148
5.30.4 Member Function Documentation . . . . .	149
5.30.4.1 compile() . . . . .	149
5.30.4.2 compilePreprocess() . . . . .	150
5.30.4.3 dump() . . . . .	150
5.31 Tang::ComputedExpression Class Reference . . . . .	150
5.31.1 Detailed Description . . . . .	153
5.31.2 Member Function Documentation . . . . .	153
5.31.2.1 __add() . . . . .	153
5.31.2.2 __asCode() . . . . .	153
5.31.2.3 __assign_index() . . . . .	153
5.31.2.4 __boolean() . . . . .	154
5.31.2.5 __divide() . . . . .	154
5.31.2.6 __equal() . . . . .	155
5.31.2.7 __float() . . . . .	155
5.31.2.8 __getIterator() . . . . .	155
5.31.2.9 __index() . . . . .	156
5.31.2.10 __integer() . . . . .	156
5.31.2.11 __iteratorNext() . . . . .	156

---

5.31.2.12 <code>__lessThan()</code> . . . . .	157
5.31.2.13 <code>__modulo()</code> . . . . .	157
5.31.2.14 <code>__multiply()</code> . . . . .	157
5.31.2.15 <code>__negative()</code> . . . . .	158
5.31.2.16 <code>__not()</code> . . . . .	158
5.31.2.17 <code>__period()</code> . . . . .	158
5.31.2.18 <code>__slice()</code> . . . . .	159
5.31.2.19 <code>__string()</code> . . . . .	159
5.31.2.20 <code>__subtract()</code> . . . . .	159
5.31.2.21 <code>dump()</code> . . . . .	160
5.31.2.22 <code>is_equal()</code> [1/6] . . . . .	160
5.31.2.23 <code>is_equal()</code> [2/6] . . . . .	161
5.31.2.24 <code>is_equal()</code> [3/6] . . . . .	161
5.31.2.25 <code>is_equal()</code> [4/6] . . . . .	161
5.31.2.26 <code>is_equal()</code> [5/6] . . . . .	162
5.31.2.27 <code>is_equal()</code> [6/6] . . . . .	162
5.31.2.28 <code>isCopyNeeded()</code> . . . . .	162
5.31.2.29 <code>makeCopy()</code> . . . . .	163
5.32 <code>Tang::ComputedExpressionArray</code> Class Reference . . . . .	163
5.32.1 Detailed Description . . . . .	166
5.32.2 Constructor & Destructor Documentation . . . . .	166
5.32.2.1 <code>ComputedExpressionArray()</code> . . . . .	166
5.32.3 Member Function Documentation . . . . .	166
5.32.3.1 <code>__add()</code> . . . . .	166
5.32.3.2 <code>__asCode()</code> . . . . .	167
5.32.3.3 <code>__assign_index()</code> . . . . .	167
5.32.3.4 <code>__boolean()</code> . . . . .	168
5.32.3.5 <code>__divide()</code> . . . . .	168
5.32.3.6 <code>__equal()</code> . . . . .	168
5.32.3.7 <code>__float()</code> . . . . .	169
5.32.3.8 <code>__getIterator()</code> . . . . .	169
5.32.3.9 <code>__index()</code> . . . . .	169
5.32.3.10 <code>__integer()</code> . . . . .	170
5.32.3.11 <code>__iteratorNext()</code> . . . . .	170
5.32.3.12 <code>__lessThan()</code> . . . . .	171
5.32.3.13 <code>__modulo()</code> . . . . .	171
5.32.3.14 <code>__multiply()</code> . . . . .	171
5.32.3.15 <code>__negative()</code> . . . . .	172
5.32.3.16 <code>__not()</code> . . . . .	172
5.32.3.17 <code>__period()</code> . . . . .	172
5.32.3.18 <code>__slice()</code> . . . . .	173
5.32.3.19 <code>__string()</code> . . . . .	174

---

5.32.3.20 __subtract() . . . . .	174
5.32.3.21 append() . . . . .	174
5.32.3.22 dump() . . . . .	175
5.32.3.23 getContents() . . . . .	175
5.32.3.24 getMethods() . . . . .	175
5.32.3.25 is_equal() [1/6] . . . . .	176
5.32.3.26 is_equal() [2/6] . . . . .	176
5.32.3.27 is_equal() [3/6] . . . . .	176
5.32.3.28 is_equal() [4/6] . . . . .	177
5.32.3.29 is_equal() [5/6] . . . . .	177
5.32.3.30 is_equal() [6/6] . . . . .	177
5.32.3.31 isCopyNeeded() . . . . .	178
5.32.3.32 makeCopy() . . . . .	178
5.33 Tang::ComputedExpressionBoolean Class Reference . . . . .	179
5.33.1 Detailed Description . . . . .	181
5.33.2 Constructor & Destructor Documentation . . . . .	181
5.33.2.1 ComputedExpressionBoolean() . . . . .	181
5.33.3 Member Function Documentation . . . . .	181
5.33.3.1 __add() . . . . .	181
5.33.3.2 __asCode() . . . . .	182
5.33.3.3 __assign_index() . . . . .	182
5.33.3.4 __boolean() . . . . .	182
5.33.3.5 __divide() . . . . .	182
5.33.3.6 __equal() . . . . .	183
5.33.3.7 __float() . . . . .	183
5.33.3.8 __getIterator() . . . . .	184
5.33.3.9 __index() . . . . .	184
5.33.3.10 __integer() . . . . .	184
5.33.3.11 __iteratorNext() . . . . .	184
5.33.3.12 __lessThan() . . . . .	185
5.33.3.13 __modulo() . . . . .	185
5.33.3.14 __multiply() . . . . .	186
5.33.3.15 __negative() . . . . .	186
5.33.3.16 __not() . . . . .	186
5.33.3.17 __period() . . . . .	186
5.33.3.18 __slice() . . . . .	187
5.33.3.19 __string() . . . . .	187
5.33.3.20 __subtract() . . . . .	188
5.33.3.21 dump() . . . . .	188
5.33.3.22 is_equal() [1/6] . . . . .	188
5.33.3.23 is_equal() [2/6] . . . . .	189
5.33.3.24 is_equal() [3/6] . . . . .	189

---

5.33.3.25 <code>is_equal()</code> [4/6]	189
5.33.3.26 <code>is_equal()</code> [5/6]	190
5.33.3.27 <code>is_equal()</code> [6/6]	190
5.33.3.28 <code>isCopyNeeded()</code>	190
5.33.3.29 <code>makeCopy()</code>	191
5.34 <code>Tang::ComputedExpressionCompiledFunction</code> Class Reference	191
5.34.1 Detailed Description	193
5.34.2 Constructor & Destructor Documentation	193
5.34.2.1 <code>ComputedExpressionCompiledFunction()</code>	194
5.34.3 Member Function Documentation	194
5.34.3.1 <code>__add()</code>	194
5.34.3.2 <code>__asCode()</code>	194
5.34.3.3 <code>__assign_index()</code>	195
5.34.3.4 <code>__boolean()</code>	195
5.34.3.5 <code>__divide()</code>	195
5.34.3.6 <code>__equal()</code>	196
5.34.3.7 <code>__float()</code>	196
5.34.3.8 <code>__getIterator()</code>	197
5.34.3.9 <code>__index()</code>	197
5.34.3.10 <code>__integer()</code>	197
5.34.3.11 <code>__iteratorNext()</code>	197
5.34.3.12 <code>__lessThan()</code>	198
5.34.3.13 <code>__modulo()</code>	198
5.34.3.14 <code>__multiply()</code>	199
5.34.3.15 <code>__negative()</code>	199
5.34.3.16 <code>__not()</code>	199
5.34.3.17 <code>__period()</code>	199
5.34.3.18 <code>__slice()</code>	200
5.34.3.19 <code>__string()</code>	200
5.34.3.20 <code>__subtract()</code>	201
5.34.3.21 <code>dump()</code>	201
5.34.3.22 <code>is_equal()</code> [1/6]	201
5.34.3.23 <code>is_equal()</code> [2/6]	202
5.34.3.24 <code>is_equal()</code> [3/6]	202
5.34.3.25 <code>is_equal()</code> [4/6]	202
5.34.3.26 <code>is_equal()</code> [5/6]	203
5.34.3.27 <code>is_equal()</code> [6/6]	203
5.34.3.28 <code>isCopyNeeded()</code>	203
5.34.3.29 <code>makeCopy()</code>	204
5.35 <code>Tang::ComputedExpressionError</code> Class Reference	204
5.35.1 Detailed Description	207
5.35.2 Constructor & Destructor Documentation	207

---

5.35.2.1 <code>ComputedExpressionError()</code>	207
5.35.3 Member Function Documentation	207
5.35.3.1 <code>__add()</code>	207
5.35.3.2 <code>__asCode()</code>	208
5.35.3.3 <code>__assign_index()</code>	208
5.35.3.4 <code>__boolean()</code>	208
5.35.3.5 <code>__divide()</code>	208
5.35.3.6 <code>__equal()</code>	209
5.35.3.7 <code>__float()</code>	209
5.35.3.8 <code>__getIterator()</code>	209
5.35.3.9 <code>__index()</code>	210
5.35.3.10 <code>__integer()</code>	210
5.35.3.11 <code>__iteratorNext()</code>	210
5.35.3.12 <code>__lessThan()</code>	211
5.35.3.13 <code>__modulo()</code>	211
5.35.3.14 <code>__multiply()</code>	212
5.35.3.15 <code>__negative()</code>	212
5.35.3.16 <code>__not()</code>	212
5.35.3.17 <code>__period()</code>	212
5.35.3.18 <code>__slice()</code>	213
5.35.3.19 <code>__string()</code>	213
5.35.3.20 <code>__subtract()</code>	214
5.35.3.21 <code>dump()</code>	214
5.35.3.22 <code>is_equal()</code> [1/6]	214
5.35.3.23 <code>is_equal()</code> [2/6]	215
5.35.3.24 <code>is_equal()</code> [3/6]	215
5.35.3.25 <code>is_equal()</code> [4/6]	215
5.35.3.26 <code>is_equal()</code> [5/6]	216
5.35.3.27 <code>is_equal()</code> [6/6]	216
5.35.3.28 <code>isCopyNeeded()</code>	216
5.35.3.29 <code>makeCopy()</code>	217
5.36 <code>Tang::ComputedExpressionFloat</code> Class Reference	217
5.36.1 Detailed Description	219
5.36.2 Constructor & Destructor Documentation	219
5.36.2.1 <code>ComputedExpressionFloat()</code>	219
5.36.3 Member Function Documentation	220
5.36.3.1 <code>__add()</code>	220
5.36.3.2 <code>__asCode()</code>	220
5.36.3.3 <code>__assign_index()</code>	221
5.36.3.4 <code>__boolean()</code>	221
5.36.3.5 <code>__divide()</code>	221
5.36.3.6 <code>__equal()</code>	222

---

5.36.3.7 <code>__float()</code> . . . . .	222
5.36.3.8 <code>__getIterator()</code> . . . . .	223
5.36.3.9 <code>__index()</code> . . . . .	223
5.36.3.10 <code>__integer()</code> . . . . .	223
5.36.3.11 <code>__iteratorNext()</code> . . . . .	224
5.36.3.12 <code>__lessThan()</code> . . . . .	224
5.36.3.13 <code>__modulo()</code> . . . . .	224
5.36.3.14 <code>__multiply()</code> . . . . .	225
5.36.3.15 <code>__negative()</code> . . . . .	225
5.36.3.16 <code>__not()</code> . . . . .	226
5.36.3.17 <code>__period()</code> . . . . .	226
5.36.3.18 <code>__slice()</code> . . . . .	226
5.36.3.19 <code>__string()</code> . . . . .	227
5.36.3.20 <code>__subtract()</code> . . . . .	227
5.36.3.21 <code>dump()</code> . . . . .	228
5.36.3.22 <code>getValue()</code> . . . . .	228
5.36.3.23 <code>is_equal()</code> [1/6] . . . . .	228
5.36.3.24 <code>is_equal()</code> [2/6] . . . . .	229
5.36.3.25 <code>is_equal()</code> [3/6] . . . . .	229
5.36.3.26 <code>is_equal()</code> [4/6] . . . . .	229
5.36.3.27 <code>is_equal()</code> [5/6] . . . . .	230
5.36.3.28 <code>is_equal()</code> [6/6] . . . . .	230
5.36.3.29 <code>isCopyNeeded()</code> . . . . .	231
5.36.3.30 <code>makeCopy()</code> . . . . .	231
<b>5.37 Tang::ComputedExpressionInteger Class Reference</b> . . . . .	231
<b>5.37.1 Detailed Description</b> . . . . .	233
<b>5.37.2 Constructor &amp; Destructor Documentation</b> . . . . .	233
<b>5.37.2.1 ComputedExpressionInteger()</b> . . . . .	233
<b>5.37.3 Member Function Documentation</b> . . . . .	234
5.37.3.1 <code>__add()</code> . . . . .	234
5.37.3.2 <code>__asCode()</code> . . . . .	234
5.37.3.3 <code>__assign_index()</code> . . . . .	235
5.37.3.4 <code>__boolean()</code> . . . . .	235
5.37.3.5 <code>__divide()</code> . . . . .	235
5.37.3.6 <code>__equal()</code> . . . . .	236
5.37.3.7 <code>__float()</code> . . . . .	236
5.37.3.8 <code>__getIterator()</code> . . . . .	237
5.37.3.9 <code>__index()</code> . . . . .	237
5.37.3.10 <code>__integer()</code> . . . . .	237
5.37.3.11 <code>__iteratorNext()</code> . . . . .	238
5.37.3.12 <code>__lessThan()</code> . . . . .	238
5.37.3.13 <code>__modulo()</code> . . . . .	238

---

5.37.3.14 <code>__multiply()</code> . . . . .	239
5.37.3.15 <code>__negative()</code> . . . . .	240
5.37.3.16 <code>__not()</code> . . . . .	240
5.37.3.17 <code>__period()</code> . . . . .	240
5.37.3.18 <code>__slice()</code> . . . . .	241
5.37.3.19 <code>__string()</code> . . . . .	241
5.37.3.20 <code>__subtract()</code> . . . . .	241
5.37.3.21 <code>dump()</code> . . . . .	242
5.37.3.22 <code>getValue()</code> . . . . .	242
5.37.3.23 <code>is_equal()</code> [1/6] . . . . .	242
5.37.3.24 <code>is_equal()</code> [2/6] . . . . .	243
5.37.3.25 <code>is_equal()</code> [3/6] . . . . .	243
5.37.3.26 <code>is_equal()</code> [4/6] . . . . .	244
5.37.3.27 <code>is_equal()</code> [5/6] . . . . .	244
5.37.3.28 <code>is_equal()</code> [6/6] . . . . .	244
5.37.3.29 <code>isCopyNeeded()</code> . . . . .	245
5.37.3.30 <code>makeCopy()</code> . . . . .	245
<b>5.38 Tang::ComputedExpressionIterator Class Reference . . . . .</b>	<b>246</b>
<b>5.38.1 Detailed Description . . . . .</b>	<b>248</b>
<b>5.38.2 Constructor &amp; Destructor Documentation . . . . .</b>	<b>248</b>
<b>5.38.2.1 <code>ComputedExpressionIterator()</code> . . . . .</b>	<b>248</b>
<b>5.38.3 Member Function Documentation . . . . .</b>	<b>248</b>
5.38.3.1 <code>__add()</code> . . . . .	248
5.38.3.2 <code>__asCode()</code> . . . . .	249
5.38.3.3 <code>__assign_index()</code> . . . . .	249
5.38.3.4 <code>__boolean()</code> . . . . .	250
5.38.3.5 <code>__divide()</code> . . . . .	250
5.38.3.6 <code>__equal()</code> . . . . .	250
5.38.3.7 <code>__float()</code> . . . . .	251
5.38.3.8 <code>__getIterator()</code> . . . . .	251
5.38.3.9 <code>__index()</code> . . . . .	251
5.38.3.10 <code>__integer()</code> . . . . .	252
5.38.3.11 <code>__iteratorNext()</code> . . . . .	252
5.38.3.12 <code>__lessThan()</code> . . . . .	253
5.38.3.13 <code>__modulo()</code> . . . . .	253
5.38.3.14 <code>__multiply()</code> . . . . .	253
5.38.3.15 <code>__negative()</code> . . . . .	254
5.38.3.16 <code>__not()</code> . . . . .	254
5.38.3.17 <code>__period()</code> . . . . .	254
5.38.3.18 <code>__slice()</code> . . . . .	255
5.38.3.19 <code>__string()</code> . . . . .	255
5.38.3.20 <code>__subtract()</code> . . . . .	255

---

5.38.3.21 <code>dump()</code> . . . . .	256
5.38.3.22 <code>is_equal()</code> [1/6] . . . . .	256
5.38.3.23 <code>is_equal()</code> [2/6] . . . . .	257
5.38.3.24 <code>is_equal()</code> [3/6] . . . . .	258
5.38.3.25 <code>is_equal()</code> [4/6] . . . . .	258
5.38.3.26 <code>is_equal()</code> [5/6] . . . . .	259
5.38.3.27 <code>is_equal()</code> [6/6] . . . . .	259
5.38.3.28 <code>isCopyNeeded()</code> . . . . .	259
5.38.3.29 <code>makeCopy()</code> . . . . .	260
5.39 <code>Tang::ComputedExpressionIteratorEnd</code> Class Reference . . . . .	260
5.39.1 Detailed Description . . . . .	262
5.39.2 Member Function Documentation . . . . .	262
5.39.2.1 <code>__add()</code> . . . . .	262
5.39.2.2 <code>__asCode()</code> . . . . .	263
5.39.2.3 <code>__assign_index()</code> . . . . .	263
5.39.2.4 <code>__boolean()</code> . . . . .	264
5.39.2.5 <code>__divide()</code> . . . . .	264
5.39.2.6 <code>__equal()</code> . . . . .	264
5.39.2.7 <code>__float()</code> . . . . .	265
5.39.2.8 <code>__getIterator()</code> . . . . .	265
5.39.2.9 <code>__index()</code> . . . . .	265
5.39.2.10 <code>__integer()</code> . . . . .	266
5.39.2.11 <code>__iteratorNext()</code> . . . . .	266
5.39.2.12 <code>__lessThan()</code> . . . . .	266
5.39.2.13 <code>__modulo()</code> . . . . .	267
5.39.2.14 <code>__multiply()</code> . . . . .	267
5.39.2.15 <code>__negative()</code> . . . . .	268
5.39.2.16 <code>__not()</code> . . . . .	268
5.39.2.17 <code>__period()</code> . . . . .	268
5.39.2.18 <code>__slice()</code> . . . . .	269
5.39.2.19 <code>__string()</code> . . . . .	269
5.39.2.20 <code>__subtract()</code> . . . . .	269
5.39.2.21 <code>dump()</code> . . . . .	270
5.39.2.22 <code>is_equal()</code> [1/6] . . . . .	270
5.39.2.23 <code>is_equal()</code> [2/6] . . . . .	271
5.39.2.24 <code>is_equal()</code> [3/6] . . . . .	272
5.39.2.25 <code>is_equal()</code> [4/6] . . . . .	272
5.39.2.26 <code>is_equal()</code> [5/6] . . . . .	273
5.39.2.27 <code>is_equal()</code> [6/6] . . . . .	273
5.39.2.28 <code>isCopyNeeded()</code> . . . . .	273
5.39.2.29 <code>makeCopy()</code> . . . . .	274
5.40 <code>Tang::ComputedExpressionLibrary</code> Class Reference . . . . .	274

---

5.40.1 Detailed Description	276
5.40.2 Member Function Documentation	276
5.40.2.1 <code>__add()</code>	276
5.40.2.2 <code>__asCode()</code>	277
5.40.2.3 <code>__assign_index()</code>	277
5.40.2.4 <code>__boolean()</code>	278
5.40.2.5 <code>__divide()</code>	278
5.40.2.6 <code>__equal()</code>	278
5.40.2.7 <code>__float()</code>	279
5.40.2.8 <code>__getIterator()</code>	279
5.40.2.9 <code>__index()</code>	279
5.40.2.10 <code>__integer()</code>	280
5.40.2.11 <code>__iteratorNext()</code>	280
5.40.2.12 <code>__lessThan()</code>	280
5.40.2.13 <code>__modulo()</code>	281
5.40.2.14 <code>__multiply()</code>	281
5.40.2.15 <code>__negative()</code>	282
5.40.2.16 <code>__not()</code>	282
5.40.2.17 <code>__period()</code>	282
5.40.2.18 <code>__slice()</code>	283
5.40.2.19 <code>__string()</code>	283
5.40.2.20 <code>__subtract()</code>	283
5.40.2.21 <code>dump()</code>	284
5.40.2.22 <code>is_equal()</code> [1/6]	284
5.40.2.23 <code>is_equal()</code> [2/6]	285
5.40.2.24 <code>is_equal()</code> [3/6]	286
5.40.2.25 <code>is_equal()</code> [4/6]	286
5.40.2.26 <code>is_equal()</code> [5/6]	287
5.40.2.27 <code>is_equal()</code> [6/6]	287
5.40.2.28 <code>isCopyNeeded()</code>	287
5.40.2.29 <code>makeCopy()</code>	288
5.41 <code>Tang::ComputedExpressionLibraryBase</code> Class Reference	288
5.41.1 Member Function Documentation	290
5.41.1.1 <code>__add()</code>	290
5.41.1.2 <code>__asCode()</code>	291
5.41.1.3 <code>__assign_index()</code>	291
5.41.1.4 <code>__boolean()</code>	292
5.41.1.5 <code>__divide()</code>	292
5.41.1.6 <code>__equal()</code>	292
5.41.1.7 <code>__float()</code>	293
5.41.1.8 <code>__getIterator()</code>	293
5.41.1.9 <code>__index()</code>	293

---

5.41.1.10 __integer() . . . . .	294
5.41.1.11 __iteratorNext() . . . . .	294
5.41.1.12 __lessThan() . . . . .	294
5.41.1.13 __modulo() . . . . .	295
5.41.1.14 __multiply() . . . . .	295
5.41.1.15 __negative() . . . . .	296
5.41.1.16 __not() . . . . .	296
5.41.1.17 __period() . . . . .	296
5.41.1.18 __slice() . . . . .	297
5.41.1.19 __string() . . . . .	297
5.41.1.20 __subtract() . . . . .	297
5.41.1.21 dump() . . . . .	298
5.41.1.22 is_equal() [1/6] . . . . .	298
5.41.1.23 is_equal() [2/6] . . . . .	299
5.41.1.24 is_equal() [3/6] . . . . .	300
5.41.1.25 is_equal() [4/6] . . . . .	300
5.41.1.26 is_equal() [5/6] . . . . .	301
5.41.1.27 is_equal() [6/6] . . . . .	301
5.41.1.28 isCopyNeeded() . . . . .	301
5.41.1.29 makeCopy() . . . . .	302
5.42 Tang::ComputedExpressionMap Class Reference . . . . .	302
5.42.1 Detailed Description . . . . .	304
5.42.2 Constructor & Destructor Documentation . . . . .	305
5.42.2.1 ComputedExpressionMap() . . . . .	305
5.42.3 Member Function Documentation . . . . .	305
5.42.3.1 __add() . . . . .	305
5.42.3.2 __asCode() . . . . .	305
5.42.3.3 __assign_index() . . . . .	306
5.42.3.4 __boolean() . . . . .	306
5.42.3.5 __divide() . . . . .	306
5.42.3.6 __equal() . . . . .	307
5.42.3.7 __float() . . . . .	307
5.42.3.8 __getIterator() . . . . .	307
5.42.3.9 __index() . . . . .	308
5.42.3.10 __integer() . . . . .	308
5.42.3.11 __iteratorNext() . . . . .	309
5.42.3.12 __lessThan() . . . . .	309
5.42.3.13 __modulo() . . . . .	309
5.42.3.14 __multiply() . . . . .	310
5.42.3.15 __negative() . . . . .	310
5.42.3.16 __not() . . . . .	310
5.42.3.17 __period() . . . . .	310

---

5.42.3.18 <code>__slice()</code> . . . . .	311
5.42.3.19 <code>__string()</code> . . . . .	311
5.42.3.20 <code>__subtract()</code> . . . . .	312
5.42.3.21 <code>dump()</code> . . . . .	312
5.42.3.22 <code>is_equal()</code> [1/6] . . . . .	313
5.42.3.23 <code>is_equal()</code> [2/6] . . . . .	313
5.42.3.24 <code>is_equal()</code> [3/6] . . . . .	313
5.42.3.25 <code>is_equal()</code> [4/6] . . . . .	314
5.42.3.26 <code>is_equal()</code> [5/6] . . . . .	314
5.42.3.27 <code>is_equal()</code> [6/6] . . . . .	314
5.42.3.28 <code>isCopyNeeded()</code> . . . . .	315
5.42.3.29 <code>makeCopy()</code> . . . . .	315
5.43 <code>Tang::ComputedExpressionNativeBoundFunction</code> Class Reference . . . . .	316
5.43.1 Detailed Description . . . . .	318
5.43.2 Constructor & Destructor Documentation . . . . .	318
5.43.2.1 <code>ComputedExpressionNativeBoundFunction()</code> . . . . .	319
5.43.3 Member Function Documentation . . . . .	319
5.43.3.1 <code>__add()</code> . . . . .	319
5.43.3.2 <code>__asCode()</code> . . . . .	320
5.43.3.3 <code>__assign_index()</code> . . . . .	320
5.43.3.4 <code>__boolean()</code> . . . . .	321
5.43.3.5 <code>__divide()</code> . . . . .	321
5.43.3.6 <code>__equal()</code> . . . . .	321
5.43.3.7 <code>__float()</code> . . . . .	322
5.43.3.8 <code>__getIterator()</code> . . . . .	322
5.43.3.9 <code>__index()</code> . . . . .	322
5.43.3.10 <code>__integer()</code> . . . . .	323
5.43.3.11 <code>__iteratorNext()</code> . . . . .	323
5.43.3.12 <code>__lessThan()</code> . . . . .	323
5.43.3.13 <code>__modulo()</code> . . . . .	325
5.43.3.14 <code>__multiply()</code> . . . . .	325
5.43.3.15 <code>__negative()</code> . . . . .	326
5.43.3.16 <code>__not()</code> . . . . .	326
5.43.3.17 <code>__period()</code> . . . . .	326
5.43.3.18 <code>__slice()</code> . . . . .	327
5.43.3.19 <code>__string()</code> . . . . .	327
5.43.3.20 <code>__subtract()</code> . . . . .	327
5.43.3.21 <code>dump()</code> . . . . .	328
5.43.3.22 <code>getArgc()</code> . . . . .	328
5.43.3.23 <code>getFunction()</code> . . . . .	328
5.43.3.24 <code>getTargetTypeIndex()</code> . . . . .	329
5.43.3.25 <code>is_equal()</code> [1/6] . . . . .	329

---

---

5.43.3.26 <code>is_equal()</code> [2/6]	329
5.43.3.27 <code>is_equal()</code> [3/6]	330
5.43.3.28 <code>is_equal()</code> [4/6]	330
5.43.3.29 <code>is_equal()</code> [5/6]	330
5.43.3.30 <code>is_equal()</code> [6/6]	331
5.43.3.31 <code>isCopyNeeded()</code>	331
5.43.3.32 <code>makeCopy()</code>	331
5.44 <code>Tang::ComputedExpressionNativeFunction</code> Class Reference	332
5.44.1 Detailed Description	334
5.44.2 Constructor & Destructor Documentation	334
5.44.2.1 <code>ComputedExpressionNativeFunction()</code>	334
5.44.3 Member Function Documentation	334
5.44.3.1 <code>__add()</code>	335
5.44.3.2 <code>__asCode()</code>	335
5.44.3.3 <code>__assign_index()</code>	335
5.44.3.4 <code>__boolean()</code>	336
5.44.3.5 <code>__divide()</code>	336
5.44.3.6 <code>__equal()</code>	336
5.44.3.7 <code>__float()</code>	337
5.44.3.8 <code>__getIterator()</code>	337
5.44.3.9 <code>__index()</code>	338
5.44.3.10 <code>__integer()</code>	338
5.44.3.11 <code>__iteratorNext()</code>	338
5.44.3.12 <code>__lessThan()</code>	339
5.44.3.13 <code>__modulo()</code>	339
5.44.3.14 <code>__multiply()</code>	339
5.44.3.15 <code>__negative()</code>	340
5.44.3.16 <code>__not()</code>	340
5.44.3.17 <code>__period()</code>	340
5.44.3.18 <code>__slice()</code>	341
5.44.3.19 <code>__string()</code>	341
5.44.3.20 <code>__subtract()</code>	342
5.44.3.21 <code>dump()</code>	342
5.44.3.22 <code>getArgc()</code>	342
5.44.3.23 <code>getFunction()</code>	343
5.44.3.24 <code>is_equal()</code> [1/6]	343
5.44.3.25 <code>is_equal()</code> [2/6]	344
5.44.3.26 <code>is_equal()</code> [3/6]	344
5.44.3.27 <code>is_equal()</code> [4/6]	345
5.44.3.28 <code>is_equal()</code> [5/6]	345
5.44.3.29 <code>is_equal()</code> [6/6]	345
5.44.3.30 <code>isCopyNeeded()</code>	346

---

5.44.3.31 makeCopy() . . . . .	346
5.45 Tang::ComputedExpressionNativeLibraryFunction Class Reference . . . . .	347
5.45.1 Detailed Description . . . . .	349
5.45.2 Constructor & Destructor Documentation . . . . .	349
5.45.2.1 ComputedExpressionNativeLibraryFunction() . . . . .	349
5.45.3 Member Function Documentation . . . . .	349
5.45.3.1 __add() . . . . .	349
5.45.3.2 __asCode() . . . . .	350
5.45.3.3 __assign_index() . . . . .	350
5.45.3.4 __boolean() . . . . .	351
5.45.3.5 __divide() . . . . .	351
5.45.3.6 __equal() . . . . .	351
5.45.3.7 __float() . . . . .	352
5.45.3.8 __getIterator() . . . . .	352
5.45.3.9 __index() . . . . .	352
5.45.3.10 __integer() . . . . .	353
5.45.3.11 __iteratorNext() . . . . .	353
5.45.3.12 __lessThan() . . . . .	353
5.45.3.13 __modulo() . . . . .	355
5.45.3.14 __multiply() . . . . .	355
5.45.3.15 __negative() . . . . .	356
5.45.3.16 __not() . . . . .	356
5.45.3.17 __period() . . . . .	356
5.45.3.18 __slice() . . . . .	357
5.45.3.19 __string() . . . . .	357
5.45.3.20 __subtract() . . . . .	357
5.45.3.21 dump() . . . . .	358
5.45.3.22 getFunction() . . . . .	358
5.45.3.23 is_equal() [1/6] . . . . .	358
5.45.3.24 is_equal() [2/6] . . . . .	359
5.45.3.25 is_equal() [3/6] . . . . .	359
5.45.3.26 is_equal() [4/6] . . . . .	359
5.45.3.27 is_equal() [5/6] . . . . .	360
5.45.3.28 is_equal() [6/6] . . . . .	360
5.45.3.29 isCopyNeeded() . . . . .	361
5.45.3.30 makeCopy() . . . . .	361
5.46 Tang::ComputedExpressionString Class Reference . . . . .	361
5.46.1 Detailed Description . . . . .	364
5.46.2 Constructor & Destructor Documentation . . . . .	364
5.46.2.1 ComputedExpressionString() [1/2] . . . . .	364
5.46.2.2 ComputedExpressionString() [2/2] . . . . .	364
5.46.3 Member Function Documentation . . . . .	365

---

5.46.3.1 <code>__add()</code> . . . . .	365
5.46.3.2 <code>__asCode()</code> . . . . .	365
5.46.3.3 <code>__assign_index()</code> . . . . .	366
5.46.3.4 <code>__boolean()</code> . . . . .	366
5.46.3.5 <code>__divide()</code> . . . . .	367
5.46.3.6 <code>__equal()</code> . . . . .	367
5.46.3.7 <code>__float()</code> . . . . .	368
5.46.3.8 <code>__getIterator()</code> . . . . .	368
5.46.3.9 <code>__index()</code> . . . . .	369
5.46.3.10 <code>__integer()</code> . . . . .	369
5.46.3.11 <code>__iteratorNext()</code> . . . . .	370
5.46.3.12 <code>__lessThan()</code> . . . . .	370
5.46.3.13 <code>__modulo()</code> . . . . .	371
5.46.3.14 <code>__multiply()</code> . . . . .	371
5.46.3.15 <code>__negative()</code> . . . . .	372
5.46.3.16 <code>__not()</code> . . . . .	372
5.46.3.17 <code>__period()</code> . . . . .	372
5.46.3.18 <code>__slice()</code> . . . . .	373
5.46.3.19 <code>__string()</code> . . . . .	374
5.46.3.20 <code>__subtract()</code> . . . . .	374
5.46.3.21 <code>bytesLength()</code> . . . . .	374
5.46.3.22 <code>dump()</code> . . . . .	375
5.46.3.23 <code>getMethods()</code> . . . . .	375
5.46.3.24 <code>getValue()</code> . . . . .	375
5.46.3.25 <code>is_equal()</code> [1/6] . . . . .	375
5.46.3.26 <code>is_equal()</code> [2/6] . . . . .	376
5.46.3.27 <code>is_equal()</code> [3/6] . . . . .	376
5.46.3.28 <code>is_equal()</code> [4/6] . . . . .	377
5.46.3.29 <code>is_equal()</code> [5/6] . . . . .	377
5.46.3.30 <code>is_equal()</code> [6/6] . . . . .	378
5.46.3.31 <code>isCopyNeeded()</code> . . . . .	378
5.46.3.32 <code>length()</code> . . . . .	379
5.46.3.33 <code>makeCopy()</code> . . . . .	379
5.46.3.34 <code>operator+=()</code> . . . . .	379
5.47 <code>Tang::Context</code> Class Reference . . . . .	380
5.47.1 Detailed Description . . . . .	380
5.48 <code>Tang::Error</code> Class Reference . . . . .	381
5.48.1 Detailed Description . . . . .	382
5.48.2 Constructor & Destructor Documentation . . . . .	382
5.48.2.1 <code>Error()</code> [1/2] . . . . .	382
5.48.2.2 <code>Error()</code> [2/2] . . . . .	382
5.48.3 Friends And Related Function Documentation . . . . .	382

---

5.48.3.1 <code>operator&lt;&lt;</code> . . . . .	383
5.49 <code>Tang::GarbageCollected</code> Class Reference . . . . .	383
5.49.1 Detailed Description . . . . .	385
5.49.2 Constructor & Destructor Documentation . . . . .	385
5.49.2.1 <code>GarbageCollected()</code> [1/3] . . . . .	385
5.49.2.2 <code>GarbageCollected()</code> [2/3] . . . . .	386
5.49.2.3 <code>~GarbageCollected()</code> . . . . .	386
5.49.2.4 <code>GarbageCollected()</code> [3/3] . . . . .	386
5.49.3 Member Function Documentation . . . . .	386
5.49.3.1 <code>isCopyNeeded()</code> . . . . .	386
5.49.3.2 <code>make()</code> . . . . .	387
5.49.3.3 <code>makeCopy()</code> . . . . .	387
5.49.3.4 <code>operator"!"()</code> . . . . .	388
5.49.3.5 <code>operator"!=()</code> . . . . .	388
5.49.3.6 <code>operator%(%)</code> . . . . .	389
5.49.3.7 <code>operator*()</code> [1/2] . . . . .	390
5.49.3.8 <code>operator*()</code> [2/2] . . . . .	390
5.49.3.9 <code>operator+()</code> . . . . .	390
5.49.3.10 <code>operator-()</code> [1/2] . . . . .	391
5.49.3.11 <code>operator-()</code> [2/2] . . . . .	391
5.49.3.12 <code>operator-&gt;()</code> . . . . .	392
5.49.3.13 <code>operator/()</code> . . . . .	392
5.49.3.14 <code>operator&lt;()</code> . . . . .	393
5.49.3.15 <code>operator&lt;=()</code> . . . . .	393
5.49.3.16 <code>operator=()</code> [1/2] . . . . .	394
5.49.3.17 <code>operator=()</code> [2/2] . . . . .	394
5.49.3.18 <code>operator==()</code> [1/8] . . . . .	394
5.49.3.19 <code>operator==()</code> [2/8] . . . . .	395
5.49.3.20 <code>operator==()</code> [3/8] . . . . .	395
5.49.3.21 <code>operator==()</code> [4/8] . . . . .	395
5.49.3.22 <code>operator==()</code> [5/8] . . . . .	396
5.49.3.23 <code>operator==()</code> [6/8] . . . . .	396
5.49.3.24 <code>operator==()</code> [7/8] . . . . .	397
5.49.3.25 <code>operator==()</code> [8/8] . . . . .	397
5.49.3.26 <code>operator&gt;()</code> . . . . .	398
5.49.3.27 <code>operator&gt;=()</code> . . . . .	398
5.49.4 Friends And Related Function Documentation . . . . .	398
5.49.4.1 <code>operator&lt;&lt;</code> . . . . .	399
5.50 <code>Tang::HtmlEscape</code> Class Reference . . . . .	399
5.50.1 Detailed Description . . . . .	400
5.50.2 Constructor & Destructor Documentation . . . . .	400
5.50.2.1 <code>HtmlEscape()</code> . . . . .	400

---

5.50.3 Member Function Documentation . . . . .	401
5.50.3.1 get_next_token() . . . . .	401
5.51 Tang::HtmlEscapeAscii Class Reference . . . . .	401
5.51.1 Detailed Description . . . . .	402
5.51.2 Constructor & Destructor Documentation . . . . .	402
5.51.2.1 HtmlEscapeAscii() . . . . .	402
5.51.3 Member Function Documentation . . . . .	403
5.51.3.1 get_next_token() . . . . .	403
5.52 Tang::location Class Reference . . . . .	403
5.52.1 Detailed Description . . . . .	404
5.53 Tang::PercentEncode Class Reference . . . . .	405
5.53.1 Detailed Description . . . . .	405
5.53.2 Constructor & Destructor Documentation . . . . .	406
5.53.2.1 PercentEncode() . . . . .	406
5.53.3 Member Function Documentation . . . . .	406
5.53.3.1 get_next_token() . . . . .	406
5.54 Tang::position Class Reference . . . . .	407
5.54.1 Detailed Description . . . . .	408
5.55 Tang::Program Class Reference . . . . .	408
5.55.1 Detailed Description . . . . .	411
5.55.2 Member Enumeration Documentation . . . . .	411
5.55.2.1 CodeType . . . . .	411
5.55.3 Constructor & Destructor Documentation . . . . .	411
5.55.3.1 Program() [1/2] . . . . .	412
5.55.3.2 Program() [2/2] . . . . .	412
5.55.4 Member Function Documentation . . . . .	412
5.55.4.1 addBreak() . . . . .	412
5.55.4.2 addBytecode() . . . . .	413
5.55.4.3 addContinue() . . . . .	413
5.55.4.4 addIdentifier() . . . . .	413
5.55.4.5 addIdentifierAssigned() . . . . .	414
5.55.4.6 addLibraryAlias() . . . . .	414
5.55.4.7 addString() . . . . .	414
5.55.4.8 dumpBytecode() . . . . .	414
5.55.4.9 execute() [1/2] . . . . .	415
5.55.4.10 execute() [2/2] . . . . .	415
5.55.4.11 getAnnotations() . . . . .	416
5.55.4.12 getAst() . . . . .	416
5.55.4.13 getBytecode() . . . . .	416
5.55.4.14 getCode() . . . . .	416
5.55.4.15 getIdentifiers() . . . . .	417
5.55.4.16 getIdentifiersAssigned() . . . . .	417

---

5.55.4.17 getLibraryAliases()	417
5.55.4.18 getResult()	417
5.55.4.19 getStrings()	418
5.55.4.20 popBreakStack()	418
5.55.4.21 popContinueStack()	418
5.55.4.22 pushEnvironment()	419
5.55.4.23 setAnnotation()	419
5.55.4.24 setFunctionStackDeclaration()	420
5.55.4.25 setJumpTarget()	420
5.55.5 Member Data Documentation	420
5.55.5.1 functionsDeclared	420
5.56 Tang::SingletonObjectPool< T > Class Template Reference	421
5.56.1 Detailed Description	422
5.56.2 Member Function Documentation	422
5.56.2.1 get()	422
5.56.2.2 getInstance()	423
5.56.2.3 recycle()	423
5.56.3 Member Data Documentation	423
5.56.3.1 currentIndex	423
5.56.3.2 currentRecycledIndex	423
5.57 Tang::TangBase Class Reference	424
5.57.1 Detailed Description	425
5.57.2 Constructor & Destructor Documentation	425
5.57.2.1 TangBase()	425
5.57.3 Member Function Documentation	425
5.57.3.1 compileScript() [1/2]	425
5.57.3.2 compileScript() [2/2]	426
5.57.3.3 compileTemplate() [1/2]	426
5.57.3.4 compileTemplate() [2/2]	426
5.57.3.5 make_shared()	428
5.58 Tang::TangScanner Class Reference	428
5.58.1 Detailed Description	429
5.58.2 Constructor & Destructor Documentation	430
5.58.2.1 TangScanner()	430
5.58.3 Member Function Documentation	430
5.58.3.1 get_next_token()	430
5.59 Tang::Unescape Class Reference	431
5.59.1 Detailed Description	431
5.59.2 Constructor & Destructor Documentation	432
5.59.2.1 Unescape()	432
5.59.3 Member Function Documentation	432
5.59.3.1 get_next_token()	432

---

5.60 Tang::UnicodeString Class Reference . . . . .	433
5.60.1 Detailed Description . . . . .	434
5.60.2 Member Enumeration Documentation . . . . .	434
5.60.2.1 Type . . . . .	434
5.60.3 Member Function Documentation . . . . .	435
5.60.3.1 bytesLength() . . . . .	435
5.60.3.2 length() . . . . .	435
5.60.3.3 operator std::string() . . . . .	436
5.60.3.4 operator+() . . . . .	436
5.60.3.5 operator+=() . . . . .	436
5.60.3.6 operator<() . . . . .	437
5.60.3.7 operator==() . . . . .	437
5.60.3.8 render() . . . . .	437
5.60.3.9 renderAscii() . . . . .	438
5.60.3.10 substr() . . . . .	438
<b>6 File Documentation</b> . . . . .	<b>441</b>
6.1 build/generated/location.hh File Reference . . . . .	441
6.1.1 Detailed Description . . . . .	442
6.1.2 Function Documentation . . . . .	442
6.1.2.1 operator<<() [1/2] . . . . .	442
6.1.2.2 operator<<() [2/2] . . . . .	443
6.2 include/astNode.hpp File Reference . . . . .	443
6.2.1 Detailed Description . . . . .	444
6.3 include/astNodeArray.hpp File Reference . . . . .	444
6.3.1 Detailed Description . . . . .	445
6.4 include/astNodeAssign.hpp File Reference . . . . .	445
6.4.1 Detailed Description . . . . .	446
6.5 include/astNodeBinary.hpp File Reference . . . . .	446
6.5.1 Detailed Description . . . . .	446
6.6 include/astNodeBlock.hpp File Reference . . . . .	447
6.6.1 Detailed Description . . . . .	447
6.7 include/astNodeBoolean.hpp File Reference . . . . .	448
6.7.1 Detailed Description . . . . .	448
6.8 include/astNodeBreak.hpp File Reference . . . . .	449
6.8.1 Detailed Description . . . . .	449
6.9 include/astNodeCast.hpp File Reference . . . . .	450
6.9.1 Detailed Description . . . . .	450
6.10 include/astNodeContinue.hpp File Reference . . . . .	451
6.10.1 Detailed Description . . . . .	451
6.11 include/astNodeDoWhile.hpp File Reference . . . . .	452
6.11.1 Detailed Description . . . . .	452

6.12 include/astNodeFloat.hpp File Reference . . . . .	453
6.12.1 Detailed Description . . . . .	453
6.13 include/astNodeFor.hpp File Reference . . . . .	454
6.13.1 Detailed Description . . . . .	454
6.14 include/astNodeFunctionCall.hpp File Reference . . . . .	455
6.14.1 Detailed Description . . . . .	455
6.15 include/astNodeFunctionDeclaration.hpp File Reference . . . . .	456
6.15.1 Detailed Description . . . . .	456
6.16 include/astNodeIdentifier.hpp File Reference . . . . .	457
6.16.1 Detailed Description . . . . .	457
6.17 include/astNodeIfElse.hpp File Reference . . . . .	457
6.17.1 Detailed Description . . . . .	458
6.18 include/astNodeIndex.hpp File Reference . . . . .	458
6.18.1 Detailed Description . . . . .	459
6.19 include/astNodeInteger.hpp File Reference . . . . .	459
6.19.1 Detailed Description . . . . .	460
6.20 include/astNodeLibrary.hpp File Reference . . . . .	460
6.20.1 Detailed Description . . . . .	461
6.21 include/astNodeMap.hpp File Reference . . . . .	461
6.21.1 Detailed Description . . . . .	462
6.22 include/astNodePeriod.hpp File Reference . . . . .	463
6.22.1 Detailed Description . . . . .	463
6.23 include/astNodePrint.hpp File Reference . . . . .	464
6.23.1 Detailed Description . . . . .	464
6.24 include/astNodeRangedFor.hpp File Reference . . . . .	465
6.24.1 Detailed Description . . . . .	465
6.25 include/astNodeReturn.hpp File Reference . . . . .	466
6.25.1 Detailed Description . . . . .	466
6.26 include/astNodeSlice.hpp File Reference . . . . .	467
6.26.1 Detailed Description . . . . .	467
6.27 include/astNodeString.hpp File Reference . . . . .	468
6.27.1 Detailed Description . . . . .	468
6.28 include/astNodeTernary.hpp File Reference . . . . .	469
6.28.1 Detailed Description . . . . .	469
6.29 include/astNodeUnary.hpp File Reference . . . . .	470
6.29.1 Detailed Description . . . . .	470
6.30 include/astNodeUse.hpp File Reference . . . . .	471
6.30.1 Detailed Description . . . . .	471
6.31 include/astNodeWhile.hpp File Reference . . . . .	472
6.31.1 Detailed Description . . . . .	472
6.32 include/computedExpression.hpp File Reference . . . . .	473
6.32.1 Detailed Description . . . . .	473

---

6.33 include/computedExpressionArray.hpp File Reference . . . . .	473
6.33.1 Detailed Description . . . . .	474
6.34 include/computedExpressionBoolean.hpp File Reference . . . . .	474
6.34.1 Detailed Description . . . . .	475
6.35 include/computedExpressionCompiledFunction.hpp File Reference . . . . .	475
6.35.1 Detailed Description . . . . .	476
6.36 include/computedExpressionError.hpp File Reference . . . . .	476
6.36.1 Detailed Description . . . . .	477
6.37 include/computedExpressionFloat.hpp File Reference . . . . .	477
6.37.1 Detailed Description . . . . .	477
6.38 include/computedExpressionInteger.hpp File Reference . . . . .	478
6.38.1 Detailed Description . . . . .	478
6.39 include/computedExpressionIterator.hpp File Reference . . . . .	478
6.39.1 Detailed Description . . . . .	479
6.40 include/computedExpressionIteratorEnd.hpp File Reference . . . . .	479
6.40.1 Detailed Description . . . . .	480
6.41 include/computedExpressionLibrary.hpp File Reference . . . . .	480
6.41.1 Detailed Description . . . . .	481
6.42 include/computedExpressionLibraryMath.hpp File Reference . . . . .	481
6.42.1 Detailed Description . . . . .	482
6.43 include/computedExpressionLibraryTang.hpp File Reference . . . . .	483
6.43.1 Detailed Description . . . . .	483
6.44 include/computedExpressionMap.hpp File Reference . . . . .	484
6.44.1 Detailed Description . . . . .	484
6.45 include/computedExpressionNativeBoundFunction.hpp File Reference . . . . .	485
6.45.1 Detailed Description . . . . .	485
6.46 include/computedExpressionNativeFunction.hpp File Reference . . . . .	486
6.46.1 Detailed Description . . . . .	486
6.47 include/computedExpressionNativeLibraryFunction.hpp File Reference . . . . .	487
6.47.1 Detailed Description . . . . .	487
6.48 include/computedExpressionString.hpp File Reference . . . . .	488
6.48.1 Detailed Description . . . . .	488
6.49 include/context.hpp File Reference . . . . .	488
6.49.1 Detailed Description . . . . .	489
6.50 include/error.hpp File Reference . . . . .	489
6.50.1 Detailed Description . . . . .	490
6.51 include/garbageCollected.hpp File Reference . . . . .	490
6.51.1 Detailed Description . . . . .	491
6.52 include/htmlEscape.hpp File Reference . . . . .	491
6.52.1 Detailed Description . . . . .	492
6.53 include/htmlEscapeAscii.hpp File Reference . . . . .	492
6.53.1 Detailed Description . . . . .	493

---

6.54 include/macros.hpp File Reference . . . . .	494
6.54.1 Detailed Description . . . . .	495
6.55 include/opcode.hpp File Reference . . . . .	495
6.55.1 Detailed Description . . . . .	496
6.55.2 Enumeration Type Documentation . . . . .	496
6.55.2.1 Opcode . . . . .	496
6.55.3 Function Documentation . . . . .	498
6.55.3.1 operator<<() . . . . .	498
6.56 include/percentEncode.hpp File Reference . . . . .	499
6.56.1 Detailed Description . . . . .	500
6.57 include/program.hpp File Reference . . . . .	500
6.57.1 Detailed Description . . . . .	501
6.57.2 Typedef Documentation . . . . .	501
6.57.2.1 OpcodePositions . . . . .	501
6.58 include/singleObjectPool.hpp File Reference . . . . .	501
6.58.1 Detailed Description . . . . .	502
6.59 include/tang.hpp File Reference . . . . .	502
6.59.1 Detailed Description . . . . .	503
6.60 include/tangBase.hpp File Reference . . . . .	503
6.60.1 Detailed Description . . . . .	504
6.61 include/tangScanner.hpp File Reference . . . . .	504
6.61.1 Detailed Description . . . . .	505
6.62 include/unescape.hpp File Reference . . . . .	506
6.62.1 Detailed Description . . . . .	506
6.63 include/unicodeString.hpp File Reference . . . . .	507
6.63.1 Detailed Description . . . . .	507
6.63.2 Function Documentation . . . . .	508
6.63.2.1 htmlEscape() . . . . .	508
6.63.2.2 htmlEscapeAscii() . . . . .	508
6.63.2.3 percentEncode() . . . . .	509
6.63.2.4 unescape() . . . . .	510
6.64 src/astNode.cpp File Reference . . . . .	510
6.64.1 Detailed Description . . . . .	511
6.65 src/astNodeArray.cpp File Reference . . . . .	511
6.65.1 Detailed Description . . . . .	511
6.66 src/astNodeAssign.cpp File Reference . . . . .	512
6.66.1 Detailed Description . . . . .	512
6.67 src/astNodeBinary.cpp File Reference . . . . .	512
6.67.1 Detailed Description . . . . .	513
6.68 src/astNodeBlock.cpp File Reference . . . . .	513
6.68.1 Detailed Description . . . . .	513
6.69 src/astNodeBoolean.cpp File Reference . . . . .	513

---

6.69.1 Detailed Description . . . . .	514
6.70 src/astNodeBreak.cpp File Reference . . . . .	514
6.70.1 Detailed Description . . . . .	514
6.71 src/astNodeCast.cpp File Reference . . . . .	515
6.71.1 Detailed Description . . . . .	515
6.71.2 Macro Definition Documentation . . . . .	515
6.71.2.1 CASTOP . . . . .	515
6.72 src/astNodeContinue.cpp File Reference . . . . .	516
6.72.1 Detailed Description . . . . .	516
6.73 src/astNodeDoWhile.cpp File Reference . . . . .	516
6.73.1 Detailed Description . . . . .	517
6.74 src/astNodeFloat.cpp File Reference . . . . .	517
6.74.1 Detailed Description . . . . .	517
6.75 src/astNodeFor.cpp File Reference . . . . .	517
6.75.1 Detailed Description . . . . .	518
6.76 src/astNodeFunctionCall.cpp File Reference . . . . .	518
6.76.1 Detailed Description . . . . .	518
6.77 src/astNodeFunctionDeclaration.cpp File Reference . . . . .	518
6.77.1 Detailed Description . . . . .	519
6.78 src/astNodeIdentifier.cpp File Reference . . . . .	519
6.78.1 Detailed Description . . . . .	519
6.79 src/astNodeIfElse.cpp File Reference . . . . .	519
6.79.1 Detailed Description . . . . .	520
6.80 src/astNodeIndex.cpp File Reference . . . . .	520
6.80.1 Detailed Description . . . . .	520
6.81 src/astNodeInteger.cpp File Reference . . . . .	520
6.81.1 Detailed Description . . . . .	521
6.82 src/astNodeLibrary.cpp File Reference . . . . .	521
6.82.1 Detailed Description . . . . .	521
6.83 src/astNodeMap.cpp File Reference . . . . .	521
6.83.1 Detailed Description . . . . .	522
6.84 src/astNodePeriod.cpp File Reference . . . . .	522
6.84.1 Detailed Description . . . . .	522
6.85 src/astNodePrint.cpp File Reference . . . . .	522
6.85.1 Detailed Description . . . . .	523
6.86 src/astNodeRangedFor.cpp File Reference . . . . .	523
6.86.1 Detailed Description . . . . .	523
6.87 src/astNodeReturn.cpp File Reference . . . . .	523
6.87.1 Detailed Description . . . . .	524
6.88 src/astNodeSlice.cpp File Reference . . . . .	524
6.88.1 Detailed Description . . . . .	524
6.89 src/astNodeString.cpp File Reference . . . . .	525

6.89.1 Detailed Description . . . . .	525
6.90 src/astNodeTernary.cpp File Reference . . . . .	525
6.90.1 Detailed Description . . . . .	526
6.91 src/astNodeUnary.cpp File Reference . . . . .	526
6.91.1 Detailed Description . . . . .	526
6.91.2 Macro Definition Documentation . . . . .	526
6.91.2.1 UNARYOP . . . . .	527
6.92 src/astNodeUse.cpp File Reference . . . . .	527
6.92.1 Detailed Description . . . . .	527
6.93 src/astNodeWhile.cpp File Reference . . . . .	528
6.93.1 Detailed Description . . . . .	528
6.94 src/computedExpression.cpp File Reference . . . . .	528
6.94.1 Detailed Description . . . . .	529
6.95 src/computedExpressionArray.cpp File Reference . . . . .	529
6.95.1 Detailed Description . . . . .	529
6.96 src/computedExpressionBoolean.cpp File Reference . . . . .	529
6.96.1 Detailed Description . . . . .	530
6.97 src/computedExpressionCompiledFunction.cpp File Reference . . . . .	530
6.97.1 Detailed Description . . . . .	530
6.98 src/computedExpressionError.cpp File Reference . . . . .	531
6.98.1 Detailed Description . . . . .	531
6.99 src/computedExpressionFloat.cpp File Reference . . . . .	531
6.99.1 Detailed Description . . . . .	532
6.100 src/computedExpressionInteger.cpp File Reference . . . . .	532
6.100.1 Detailed Description . . . . .	532
6.101 src/computedExpressionIterator.cpp File Reference . . . . .	532
6.101.1 Detailed Description . . . . .	533
6.102 src/computedExpressionIteratorEnd.cpp File Reference . . . . .	533
6.102.1 Detailed Description . . . . .	533
6.103 src/computedExpressionLibrary.cpp File Reference . . . . .	534
6.103.1 Detailed Description . . . . .	534
6.104 src/computedExpressionLibraryMath.cpp File Reference . . . . .	534
6.104.1 Detailed Description . . . . .	535
6.105 src/computedExpressionLibraryTang.cpp File Reference . . . . .	535
6.105.1 Detailed Description . . . . .	535
6.106 src/computedExpressionMap.cpp File Reference . . . . .	535
6.106.1 Detailed Description . . . . .	536
6.107 src/computedExpressionNativeBoundFunction.cpp File Reference . . . . .	536
6.107.1 Detailed Description . . . . .	536
6.108 src/computedExpressionNativeFunction.cpp File Reference . . . . .	536
6.108.1 Detailed Description . . . . .	537
6.109 src/computedExpressionNativeLibraryFunction.cpp File Reference . . . . .	537

---

6.109.1 Detailed Description	537
6.110 src/computedExpressionString.cpp File Reference	538
6.110.1 Detailed Description	538
6.111 src/context.cpp File Reference	538
6.111.1 Detailed Description	539
6.112 src/error.cpp File Reference	539
6.112.1 Detailed Description	539
6.112.2 Function Documentation	539
6.112.2.1 operator<<()	539
6.113 src/garbageCollected.cpp File Reference	540
6.113.1 Function Documentation	540
6.113.1.1 operator<<()	540
6.114 src/opcode.cpp File Reference	541
6.114.1 Detailed Description	541
6.115 src/program-analyze.cpp File Reference	541
6.115.1 Detailed Description	542
6.115.2 Macro Definition Documentation	542
6.115.2.1 DUMPPROGRAMCHECK	542
6.116 src/program-dumpBytecode.cpp File Reference	543
6.116.1 Detailed Description	543
6.116.2 Macro Definition Documentation	543
6.116.2.1 DUMPBINARY	543
6.116.2.2 DUMPBINARY_I	544
6.116.2.3 DUMPBINARY_II	544
6.116.2.4 DUMPPROGRAMCHECK	544
6.117 src/program-execute.cpp File Reference	544
6.117.1 Detailed Description	545
6.117.2 Macro Definition Documentation	545
6.117.2.1 BINARYOP_II	546
6.117.2.2 BINARYOP_IS	546
6.117.2.3 BINARYOP_SI	546
6.117.2.4 BINARYOP_SS	546
6.117.2.5 CASTOP_I	547
6.117.2.6 CASTOP_S	547
6.117.2.7 EXECUTEPROGRAMCHECK	547
6.117.2.8 STACKCHECK	547
6.117.2.9 UNARYOP_I	548
6.117.2.10 UNARYOP_S	548
6.118 src/program-optimize.cpp File Reference	548
6.118.1 Detailed Description	549
6.119 src/program.cpp File Reference	549
6.119.1 Detailed Description	549

6.120 src/tang.cpp File Reference . . . . .	549
6.120.1 Detailed Description . . . . .	550
6.121 src/tangBase.cpp File Reference . . . . .	550
6.121.1 Detailed Description . . . . .	550
6.121.2 Macro Definition Documentation . . . . .	550
6.121.2.1 LIBRARY . . . . .	551
6.122 src/unicodeString.cpp File Reference . . . . .	551
6.122.1 Detailed Description . . . . .	551
6.123 test/test.cpp File Reference . . . . .	551
6.123.1 Detailed Description . . . . .	553
6.124 test/testGarbageCollected.cpp File Reference . . . . .	553
6.124.1 Detailed Description . . . . .	554
6.125 test/testSingletonObjectPool.cpp File Reference . . . . .	554
6.125.1 Detailed Description . . . . .	555
6.126 test/testUnicodeString.cpp File Reference . . . . .	555
6.126.1 Detailed Description . . . . .	555
<b>Index</b>	<b>557</b>

# Chapter 1

## Tang: A Template Language

### 1.1 Quick Description

**Tang** is a C++ Template Language. It takes the form of a library which may be included in other projects. It is under active development, and you can follow its progress here:

- [YouTube playlist](#)
- [GitHub repository](#)

### 1.2 Features

The following features are planned:

- Native support for Unicode/Utf-8 strings.
- Change from template to script mode using escape tags like PHP.
- Loosely typed, with Python-like indexing and slicing of containers.
- Syntax similar to C/C++/PHP.
- Code compiles to a custom Bytecode and is executed by the Tang VM.
- Fast and thread-safe.

### 1.3 License

MIT License

Copyright (c) 2022 Corey Pennycuff

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

# Chapter 2

## Hierarchical Index

### 2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Tang::AstNode . . . . .	15
Tang::AstNodeArray . . . . .	21
Tang::AstNodeAssign . . . . .	25
Tang::AstNodeBinary . . . . .	29
Tang::AstNodeBlock . . . . .	35
Tang::AstNodeBoolean . . . . .	39
Tang::AstNodeBreak . . . . .	43
Tang::AstNodeCast . . . . .	47
Tang::AstNodeContinue . . . . .	51
Tang::AstNodeDoWhile . . . . .	55
Tang::AstNodeFloat . . . . .	60
Tang::AstNodeFor . . . . .	64
Tang::AstNodeFunctionCall . . . . .	69
Tang::AstNodeFunctionDeclaration . . . . .	72
Tang::AstNodeIdentifier . . . . .	76
Tang::AstNodeIfElse . . . . .	81
Tang::AstNodeIndex . . . . .	86
Tang::AstNodeInteger . . . . .	91
Tang::AstNodeLibrary . . . . .	95
Tang::AstNodeMap . . . . .	99
Tang::AstNodePeriod . . . . .	103
Tang::AstNodePrint . . . . .	107
Tang::AstNodeRangedFor . . . . .	112
Tang::AstNodeReturn . . . . .	116
Tang::AstNodeSlice . . . . .	120
Tang::AstNodeString . . . . .	125
Tang::AstNodeTernary . . . . .	130
Tang::AstNodeUnary . . . . .	135
Tang::AstNodeUse . . . . .	141
Tang::AstNodeWhile . . . . .	145
Tang::ComputedExpression . . . . .	150
Tang::ComputedExpressionArray . . . . .	163
Tang::ComputedExpressionBoolean . . . . .	179
Tang::ComputedExpressionCompiledFunction . . . . .	191
Tang::ComputedExpressionError . . . . .	204

Tang::ComputedExpressionFloat . . . . .	217
Tang::ComputedExpressionInteger . . . . .	231
Tang::ComputedExpressionIterator . . . . .	246
Tang::ComputedExpressionIteratorEnd . . . . .	260
Tang::ComputedExpressionLibrary . . . . .	274
Tang::ComputedExpressionLibraryBase . . . . .	288
Tang::ComputedExpressionMap . . . . .	302
Tang::ComputedExpressionNativeBoundFunction . . . . .	316
Tang::ComputedExpressionNativeFunction . . . . .	332
Tang::ComputedExpressionNativeLibraryFunction . . . . .	347
Tang::ComputedExpressionString . . . . .	361
Tang::Context . . . . .	380
std::enable_shared_from_this	
Tang::TangBase . . . . .	424
Tang::Error . . . . .	381
Tang::GarbageCollected . . . . .	383
Tang::location . . . . .	403
Tang::position . . . . .	407
Tang::Program . . . . .	408
Tang::SingletonObjectPool< T > . . . . .	421
TangHtmlEscapeAsciiFlexLexer	
Tang::HtmlEscapeAscii . . . . .	401
TangHtmlEscapeFlexLexer	
Tang::HtmlEscape . . . . .	399
TangPercentEncodeFlexLexer	
Tang::PercentEncode . . . . .	405
TangTangFlexLexer	
Tang::TangScanner . . . . .	428
TangUnescapeFlexLexer	
Tang::Unescape . . . . .	431
Tang::UnicodeString . . . . .	433

# Chapter 3

## Class Index

### 3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">Tang::AstNode</a>	Base class for representing nodes of an Abstract Syntax Tree (AST) . . . . .	15
<a href="#">Tang::AstNodeArray</a>	An <a href="#">AstNode</a> that represents an array literal . . . . .	21
<a href="#">Tang::AstNodeAssign</a>	An <a href="#">AstNode</a> that represents a binary expression . . . . .	25
<a href="#">Tang::AstNodeBinary</a>	An <a href="#">AstNode</a> that represents a binary expression . . . . .	29
<a href="#">Tang::AstNodeBlock</a>	An <a href="#">AstNode</a> that represents a code block . . . . .	35
<a href="#">Tang::AstNodeBoolean</a>	An <a href="#">AstNode</a> that represents a boolean literal . . . . .	39
<a href="#">Tang::AstNodeBreak</a>	An <a href="#">AstNode</a> that represents a <code>break</code> statement . . . . .	43
<a href="#">Tang::AstNodeCast</a>	An <a href="#">AstNode</a> that represents a typecast of an expression . . . . .	47
<a href="#">Tang::AstNodeContinue</a>	An <a href="#">AstNode</a> that represents a <code>continue</code> statement . . . . .	51
<a href="#">Tang::AstNodeDoWhile</a>	An <a href="#">AstNode</a> that represents a <code>do..while</code> statement . . . . .	55
<a href="#">Tang::AstNodeFloat</a>	An <a href="#">AstNode</a> that represents an float literal . . . . .	60
<a href="#">Tang::AstNodeFor</a>	An <a href="#">AstNode</a> that represents an <code>if()</code> statement . . . . .	64
<a href="#">Tang::AstNodeFunctionCall</a>	An <a href="#">AstNode</a> that represents a function call . . . . .	69
<a href="#">Tang::AstNodeFunctionDeclaration</a>	An <a href="#">AstNode</a> that represents a function declaration . . . . .	72
<a href="#">Tang::AstNodeIdentifier</a>	An <a href="#">AstNode</a> that represents an identifier . . . . .	76
<a href="#">Tang::AstNodeIfElse</a>	An <a href="#">AstNode</a> that represents an <code>if..else</code> statement . . . . .	81
<a href="#">Tang::AstNodeIndex</a>	An <a href="#">AstNode</a> that represents an index into a collection . . . . .	86
<a href="#">Tang::AstNodeInteger</a>	An <a href="#">AstNode</a> that represents an integer literal . . . . .	91

Tang::AstNodeLibrary	An <code>AstNode</code> that represents an identifier . . . . .	95
Tang::AstNodeMap	An <code>AstNode</code> that represents a map literal . . . . .	99
Tang::AstNodePeriod	An <code>AstNode</code> that represents a member access (period) into an object . . . . .	103
Tang::AstNodePrint	An <code>AstNode</code> that represents a print typeeration . . . . .	107
Tang::AstNodeRangedFor	An <code>AstNode</code> that represents a ranged for() statement . . . . .	112
Tang::AstNodeReturn	An <code>AstNode</code> that represents a <code>return</code> statement . . . . .	116
Tang::AstNodeSlice	An <code>AstNode</code> that represents a ternary expression . . . . .	120
Tang::AstNodeString	An <code>AstNode</code> that represents a string literal . . . . .	125
Tang::AstNodeTernary	An <code>AstNode</code> that represents a ternary expression . . . . .	130
Tang::AstNodeUnary	An <code>AstNode</code> that represents a unary negation . . . . .	135
Tang::AstNodeUse	An <code>AstNode</code> that represents the inclusion of a library into the script . . . . .	141
Tang::AstNodeWhile	An <code>AstNode</code> that represents a while statement . . . . .	145
Tang::ComputedExpression	Represents the result of a computation that has been executed . . . . .	150
Tang::ComputedExpressionArray	Represents an Array that is the result of a computation . . . . .	163
Tang::ComputedExpressionBoolean	Represents an Boolean that is the result of a computation . . . . .	179
Tang::ComputedExpressionCompiledFunction	Represents a Compiled Function declared in the script . . . . .	191
Tang::ComputedExpressionError	Represents a Runtime <code>Error</code> . . . . .	204
Tang::ComputedExpressionFloat	Represents a Float that is the result of a computation . . . . .	217
Tang::ComputedExpressionInteger	Represents an Integer that is the result of a computation . . . . .	231
Tang::ComputedExpressionIterator	Represents an Iterator that is the result of a computation . . . . .	246
Tang::ComputedExpressionIteratorEnd	Represents that a collection has no more values through which to iterate . . . . .	260
Tang::ComputedExpressionLibrary	Represents a Runtime Library . . . . .	274
Tang::ComputedExpressionLibraryBase		288
Tang::ComputedExpressionMap	Represents an Map that is the result of a computation . . . . .	302
Tang::ComputedExpressionNativeBoundFunction	Represents a NativeBound Function declared in the script . . . . .	316
Tang::ComputedExpressionNativeFunction	Represents a Native Function provided by compiled C++ code . . . . .	332
Tang::ComputedExpressionNativeLibraryFunction	Represents a Native Function provided by compiled C++ code that is executed to create a library or one of its attributes . . . . .	347
Tang::ComputedExpressionString	Represents a String that is the result of a computation . . . . .	361
Tang::Context	Holds all environment variables specific to the execution of a program . . . . .	380

<a href="#">Tang::Error</a>	Used to report any error of the system, whether a syntax (parsing) error or a runtime (execution) error . . . . .	381
<a href="#">Tang::GarbageCollected</a>	A container that acts as a resource-counting garbage collector for the specified type . . . . .	383
<a href="#">Tang::HtmlEscape</a>	The Flex lexer class for the main Tang language . . . . .	399
<a href="#">Tang::HtmlEscapeAscii</a>	The Flex lexer class for the main Tang language . . . . .	401
<a href="#">Tang::location</a>	Two points in a source file . . . . .	403
<a href="#">Tang::PercentEncode</a>	The Flex lexer class for the Percent Encode scanner . . . . .	405
<a href="#">Tang::position</a>	A point in a source file . . . . .	407
<a href="#">Tang::Program</a>	Represents a compiled script or template that may be executed . . . . .	408
<a href="#">Tang::SingletonObjectPool&lt; T &gt;</a>	A thread-safe, singleton object pool of the designated type . . . . .	421
<a href="#">Tang::TangBase</a>	The base class for the Tang programming language . . . . .	424
<a href="#">Tang::TangScanner</a>	The Flex lexer class for the main Tang language . . . . .	428
<a href="#">Tang::Unescape</a>	The Flex lexer class for the main Tang language . . . . .	431
<a href="#">Tang::UnicodeString</a>	Represents a UTF-8 encoded string that is Unicode-aware . . . . .	433



# Chapter 4

## File Index

### 4.1 File List

Here is a list of all documented files with brief descriptions:

build/generated/ <a href="#">location.hh</a>	Define the Tang ::location class . . . . .	441
include/ <a href="#">astNode.hpp</a>	Declare the Tang::AstNode base class . . . . .	443
include/ <a href="#">astNodeArray.hpp</a>	Declare the Tang::AstNodeArray class . . . . .	444
include/ <a href="#">astNodeAssign.hpp</a>	Declare the Tang::AstNodeAssign class . . . . .	445
include/ <a href="#">astNodeBinary.hpp</a>	Declare the Tang::AstNodeBinary class . . . . .	446
include/ <a href="#">astNodeBlock.hpp</a>	Declare the Tang::AstNodeBlock class . . . . .	447
include/ <a href="#">astNodeBoolean.hpp</a>	Declare the Tang::AstNodeBoolean class . . . . .	448
include/ <a href="#">astNodeBreak.hpp</a>	Declare the Tang::AstNodeBreak class . . . . .	449
include/ <a href="#">astNodeCast.hpp</a>	Declare the Tang::AstNodeCast class . . . . .	450
include/ <a href="#">astNodeContinue.hpp</a>	Declare the Tang::AstNodeContinue class . . . . .	451
include/ <a href="#">astNodeDoWhile.hpp</a>	Declare the Tang::AstNodeDoWhile class . . . . .	452
include/ <a href="#">astNodeFloat.hpp</a>	Declare the Tang::AstNodeFloat class . . . . .	453
include/ <a href="#">astNodeFor.hpp</a>	Declare the Tang::AstNodeFor class . . . . .	454
include/ <a href="#">astNodeFunctionCall.hpp</a>	Declare the Tang::AstNodeFunctionCall class . . . . .	455
include/ <a href="#">astNodeFunctionDeclaration.hpp</a>	Declare the Tang::AstNodeFunctionDeclaration class . . . . .	456
include/ <a href="#">astNodeIdentifier.hpp</a>	Declare the Tang::AstNodeIdentifier class . . . . .	457
include/ <a href="#">astNodeIfElse.hpp</a>	Declare the Tang::AstNodeIfElse class . . . . .	457
include/ <a href="#">astNodeIndex.hpp</a>	Declare the Tang::AstNodeIndex class . . . . .	458

include/astNodeInteger.hpp	Declare the <code>Tang::AstNodeInteger</code> class	459
include/astNodeLibrary.hpp	Declare the <code>Tang::AstNodeLibrary</code> class	460
include/astNodeMap.hpp	Declare the <code>Tang::AstNodeMap</code> class	461
include/astNodePeriod.hpp	Declare the <code>Tang::AstNodePeriod</code> class	463
include/astNodePrint.hpp	Declare the <code>Tang::AstNodePrint</code> class	464
include/astNodeRangedFor.hpp	Declare the <code>Tang::AstNodeRangedFor</code> class	465
include/astNodeReturn.hpp	Declare the <code>Tang::AstNodeReturn</code> class	466
include/astNodeSlice.hpp	Declare the <code>Tang::AstNodeSlice</code> class	467
include/astNodeString.hpp	Declare the <code>Tang::AstNodeString</code> class	468
include/astNodeTernary.hpp	Declare the <code>Tang::AstNodeTernary</code> class	469
include/astNodeUnary.hpp	Declare the <code>Tang::AstNodeUnary</code> class	470
include/astNodeUse.hpp	Declare the <code>Tang::AstNodeUse</code> class	471
include/astNodeWhile.hpp	Declare the <code>Tang::AstNodeWhile</code> class	472
include/computedExpression.hpp	Declare the <code>Tang::ComputedExpression</code> base class	473
include/computedExpressionArray.hpp	Declare the <code>Tang::ComputedExpressionArray</code> class	473
include/computedExpressionBoolean.hpp	Declare the <code>Tang::ComputedExpressionBoolean</code> class	474
include/computedExpressionCompiledFunction.hpp	Declare the <code>Tang::ComputedExpressionCompiledFunction</code> class	475
include/computedExpressionError.hpp	Declare the <code>Tang::ComputedExpressionError</code> class	476
include/computedExpressionFloat.hpp	Declare the <code>Tang::ComputedExpressionFloat</code> class	477
include/computedExpressionInteger.hpp	Declare the <code>Tang::ComputedExpressionInteger</code> class	478
include/computedExpressionIterator.hpp	Declare the <code>Tang::ComputedExpressionIterator</code> class	478
include/computedExpressionIteratorEnd.hpp	Declare the <code>Tang::ComputedExpressionIteratorEnd</code> class	479
include/computedExpressionLibrary.hpp	Declare the <code>Tang::ComputedExpressionLibrary</code> class	480
include/computedExpressionLibraryBase.hpp		??
include/computedExpressionLibraryMath.hpp	Declare the <code>Tang::ComputedExpressionLibraryMath</code> class	481
include/computedExpressionLibraryTang.hpp	Declare the <code>Tang::ComputedExpressionLibraryTang</code> class	483
include/computedExpressionMap.hpp	Declare the <code>Tang::ComputedExpressionMap</code> class	484
include/computedExpressionNativeBoundFunction.hpp	Declare the <code>Tang::ComputedExpressionNativeBoundFunction</code> class	485
include/computedExpressionNativeFunction.hpp	Declare the <code>Tang::ComputedExpressionNativeFunction</code> class	486

include/computedExpressionNativeLibraryFunction.hpp	Declare the <code>Tang::ComputedExpressionNativeLibraryFunction</code> class	487
include/computedExpressionString.hpp	Declare the <code>Tang::ComputedExpressionString</code> class	488
include/context.hpp	Declare the <code>Tang::Context</code> class	488
include/error.hpp	Declare the <code>Tang::Error</code> class used to describe syntax and runtime errors	489
include/garbageCollected.hpp	Declare the <code>Tang::GarbageCollected</code> class	490
include/htmlEscape.hpp	Declare the <code>Tang::HtmlEscape</code> used to tokenize a Tang script	491
include/htmlEscapeAscii.hpp	Declare the <code>Tang::HtmlEscapeAscii</code> used to tokenize a Tang script	492
include/macros.hpp	Contains generic macros	494
include/opcode.hpp	Declare the Opcodes used in the Bytecode representation of a program	495
include/percentEncode.hpp	Declare the <code>Tang::PercentEncode</code> used to tokenize a Tang script	499
include/program.hpp	Declare the <code>Tang::Program</code> class used to compile and execute source code	500
include/singleObjectPool.hpp	Declare the <code>Tang::SingletonObjectPool</code> class	501
include/tang.hpp	Header file supplied for use by 3rd party code so that they can easily include all necessary headers	502
include/tangBase.hpp	Declare the <code>Tang::TangBase</code> class used to interact with Tang	503
include/tangScanner.hpp	Declare the <code>Tang::TangScanner</code> used to tokenize a Tang script	504
include/unescape.hpp	Declare the <code>Tang::Unescape</code> used to tokenize a Tang script	506
include/unicodeString.hpp	Contains the code to interface with the ICU library	507
src/astNode.cpp	Define the <code>Tang::AstNode</code> class	510
src/astNodeArray.cpp	Define the <code>Tang::AstNodeArray</code> class	511
src/astNodeAssign.cpp	Define the <code>Tang::AstNodeAssign</code> class	512
src/astNodeBinary.cpp	Define the <code>Tang::AstNodeBinary</code> class	512
src/astNodeBlock.cpp	Define the <code>Tang::AstNodeBlock</code> class	513
src/astNodeBoolean.cpp	Define the <code>Tang::AstNodeBoolean</code> class	513
src/astNodeBreak.cpp	Define the <code>Tang::AstNodeBreak</code> class	514
src/astNodeCast.cpp	Define the <code>Tang::AstNodeCast</code> class	515
src/astNodeContinue.cpp	Define the <code>Tang::AstNodeContinue</code> class	516
src/astNodeDoWhile.cpp	Define the <code>Tang::AstNodeDoWhile</code> class	516
src/astNodeFloat.cpp	Define the <code>Tang::AstNodeFloat</code> class	517

src/astNodeFor.cpp	Define the Tang::AstNodeFor class . . . . .	517
src/astNodeFunctionCall.cpp	Define the Tang::AstNodeFunctionCall class . . . . .	518
src/astNodeFunctionDeclaration.cpp	Define the Tang::AstNodeFunctionDeclaration class . . . . .	518
src/astNodeIdentifier.cpp	Define the Tang::AstNodeIdentifier class . . . . .	519
src/astNodeIfElse.cpp	Define the Tang::AstNodeIfElse class . . . . .	519
src/astNodeIndex.cpp	Define the Tang::AstNodeIndex class . . . . .	520
src/astNodeInteger.cpp	Define the Tang::AstNodeInteger class . . . . .	520
src/astNodeLibrary.cpp	Define the Tang::AstNodeLibrary class . . . . .	521
src/astNodeMap.cpp	Define the Tang::AstNodeMap class . . . . .	521
src/astNodePeriod.cpp	Define the Tang::AstNodePeriod class . . . . .	522
src/astNodePrint.cpp	Define the Tang::AstNodePrint class . . . . .	522
src/astNodeRangedFor.cpp	Define the Tang::AstNodeRangedFor class . . . . .	523
src/astNodeReturn.cpp	Define the Tang::AstNodeReturn class . . . . .	523
src/astNodeSlice.cpp	Define the Tang::AstNodeSlice class . . . . .	524
src/astNodeString.cpp	Define the Tang::AstNodeString class . . . . .	525
src/astNodeTernary.cpp	Define the Tang::AstNodeTernary class . . . . .	525
src/astNodeUnary.cpp	Define the Tang::AstNodeUnary class . . . . .	526
src/astNodeUse.cpp	Define the Tang::AstNodeUse class . . . . .	527
src/astNodeWhile.cpp	Define the Tang::AstNodeWhile class . . . . .	528
src/computedExpression.cpp	Define the Tang::ComputedExpression class . . . . .	528
src/computedExpressionArray.cpp	Define the Tang::ComputedExpressionArray class . . . . .	529
src/computedExpressionBoolean.cpp	Define the Tang::ComputedExpressionBoolean class . . . . .	529
src/computedExpressionCompiledFunction.cpp	Define the Tang::ComputedExpressionCompiledFunction class . . . . .	530
src/computedExpressionError.cpp	Define the Tang::ComputedExpressionError class . . . . .	531
src/computedExpressionFloat.cpp	Define the Tang::ComputedExpressionFloat class . . . . .	531
src/computedExpressionInteger.cpp	Define the Tang::ComputedExpressionInteger class . . . . .	532
src/computedExpressionIterator.cpp	Define the Tang::ComputedExpressionIterator class . . . . .	532
src/computedExpressionIteratorEnd.cpp	Define the Tang::ComputedExpressionIteratorEnd class . . . . .	533
src/computedExpressionLibrary.cpp	Define the Tang::ComputedExpressionLibrary class . . . . .	534

src/computedExpressionLibraryMath.cpp	Define the Tang::ComputedExpressionLibraryMath class	534
src/computedExpressionLibraryTang.cpp	Define the Tang::ComputedExpressionLibraryTang class	535
src/computedExpressionMap.cpp	Define the Tang::ComputedExpressionMap class	535
src/computedExpressionNativeBoundFunction.cpp	Define the Tang::ComputedExpressionNativeBoundFunction class	536
src/computedExpressionNativeFunction.cpp	Define the Tang::ComputedExpressionNativeFunction class	536
src/computedExpressionNativeLibraryFunction.cpp	Define the Tang::ComputedExpressionNativeLibraryFunction class	537
src/computedExpressionString.cpp	Define the Tang::ComputedExpressionString class	538
src/context.cpp	Define the Tang::Context class	538
src/error.cpp	Define the Tang::Error class	539
src/garbageCollected.cpp		540
src/opcode.cpp	Define the Tang::Program::dumpBytecode method	541
src/program-analyze.cpp	Define the Tang::Program::analyze method	541
src/program-dumpBytecode.cpp	Define the Tang::Program::dumpBytecode method	543
src/program-execute.cpp	Define the Tang::Program::execute method	544
src/program-optimize.cpp	Define the Tang::Program::optimize method	548
src/program.cpp	Define the Tang::Program class	549
src/tang.cpp	Code for the Tang command line interpreter	549
src/tangBase.cpp	Define the Tang::TangBase class	550
src/unicodeString.cpp	Contains the function declarations for the Tang::UnicodeString class and the interface to ICU	551
test/test.cpp	Test the general language behaviors	551
test/testGarbageCollected.cpp	Test the generic behavior of the Tang::GarbageCollected class	553
test/testSingletonObjectPool.cpp	Test the generic behavior of the Tang::SingletonObjectPool class	554
test/testUnicodeString.cpp	Contains tests for the Tang::UnicodeString class	555



## Chapter 5


# Class Documentation

### 5.1 Tang::AstNode Class Reference


Base class for representing nodes of an Abstract Syntax Tree (AST).

```
#include <astNode.hpp>
```

Inheritance diagram for Tang::AstNode:

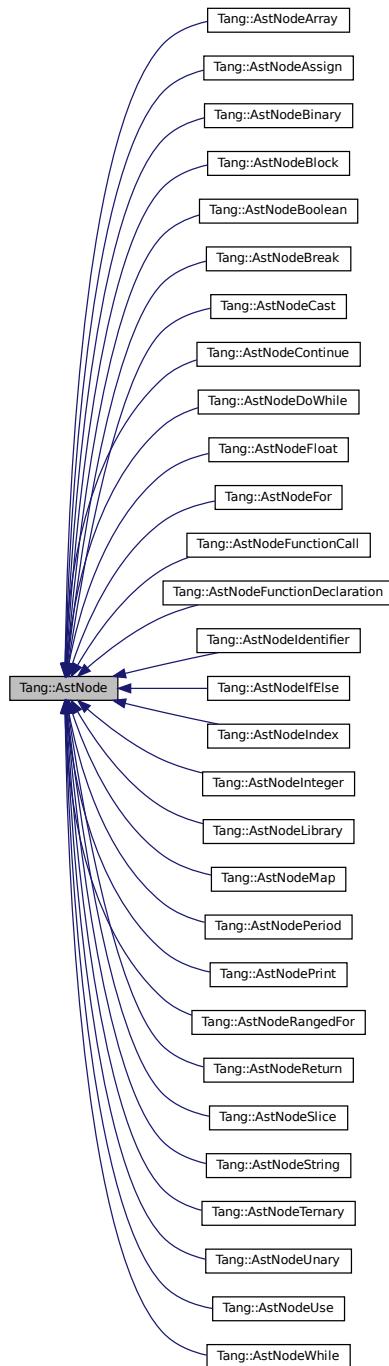

Collaboration diagram for Tang::AstNode:

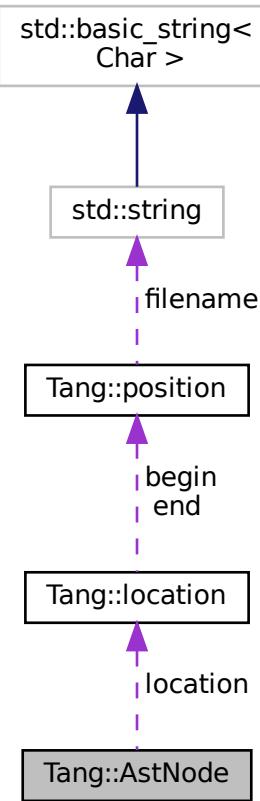

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNode (Tang::location location)`  
*The generic constructor.*
- `virtual ~AstNode ()`  
*The object destructor.*
- `virtual std::string dump (std::string indent="") const`  
*Return a string that describes the contents of the node.*
- `virtual void compile (Tang::Program &program) const`  
*Compile the ast of the provided Tang::Program.*
- `virtual void compilePreprocess (Program &program, PreprocessState state) const`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

### 5.1.1 Detailed Description

Base class for representing nodes of an Abstract Syntax Tree (AST).

By default, it will represent a NULL value. There will be *many* derived classes, each one conveying the syntactic meaning of the code that it represents.

### 5.1.2 Member Enumeration Documentation

#### 5.1.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.1.3 Constructor & Destructor Documentation

#### 5.1.3.1 AstNode()

```
AstNode::AstNode (   
    Tang::location location )
```

The generic constructor.

It should never be called on its own.

Parameters

<code>location</code>	The location associated with this node.
-----------------------	---

## 5.1.4 Member Function Documentation

### 5.1.4.1 compile()

```
void AstNode::compile (
    Tang::Program & program ) const [virtual]
```


Compile the ast of the provided [Tang::Program](#).

#### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented in [Tang::AstNodeWhile](#), [Tang::AstNodeUse](#), [Tang::AstNodeUnary](#), [Tang::AstNodeTernary](#), [Tang::AstNodeString](#), [Tang::AstNodeSlice](#), [Tang::AstNodeReturn](#), [Tang::AstNodeRangedFor](#), [Tang::AstNodePrint](#), [Tang::AstNodePeriod](#), [Tang::AstNodeMap](#), [Tang::AstNodeLibrary](#), [Tang::AstNodeInteger](#), [Tang::AstNodeIndex](#), [Tang::AstNodeIfElse](#), [Tang::AstNodeIdentifier](#), [Tang::AstNodeFunctionDeclaration](#), [Tang::AstNodeFunctionCall](#), [Tang::AstNodeFor](#), [Tang::AstNodeFloat](#), [Tang::AstNodeDoWhile](#), [Tang::AstNodeContinue](#), [Tang::AstNodeCast](#), [Tang::AstNodeBreak](#), [Tang::AstNodeBoolean](#), [Tang::AstNodeBlock](#), [Tang::AstNodeBinary](#), [Tang::AstNodeAssign](#), and [Tang::AstNodeArray](#).

Here is the call graph for this function:



### 5.1.4.2 compilePreprocess()

```
void AstNode::compilePreprocess (
    Program & program,
    PreprocessState state ) const [virtual]
```

Run any preprocess analysis needed before compilation.

#### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented in [Tang::AstNodeWhile](#), [Tang::AstNodeUse](#), [Tang::AstNodeUnary](#), [Tang::AstNodeTernary](#),

`Tang::AstNodeString`, `Tang::AstNodeSlice`, `Tang::AstNodeReturn`, `Tang::AstNodeRangedFor`, `Tang::AstNodePrint`, `Tang::AstNodePeriod`, `Tang::AstNodeMap`, `Tang::AstNodeLibrary`, `Tang::AstNodeIndex`, `Tang::AstNodeIfElse`, `Tang::AstNodeIdentifier`, `Tang::AstNodeFunctionDeclaration`, `Tang::AstNodeFunctionCall`, `Tang::AstNodeFor`, `Tang::AstNodeDoWhile`, `Tang::AstNodeCast`, `Tang::AstNodeBlock`, `Tang::AstNodeBinary`, `Tang::AstNodeAssign`, and `Tang::AstNodeArray`.

### 5.1.4.3 `dump()`

```
string AstNode::dump (
    std::string indent = "" ) const [virtual]
```

Return a string that describes the contents of the node.

#### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

#### Returns

The value as a string.

Reimplemented in `Tang::AstNodeWhile`, `Tang::AstNodeUse`, `Tang::AstNodeUnary`, `Tang::AstNodeTernary`, `Tang::AstNodeString`, `Tang::AstNodeSlice`, `Tang::AstNodeReturn`, `Tang::AstNodeRangedFor`, `Tang::AstNodePrint`, `Tang::AstNodePeriod`, `Tang::AstNodeMap`, `Tang::AstNodeLibrary`, `Tang::AstNodeInteger`, `Tang::AstNodeIndex`, `Tang::AstNodeIfElse`, `Tang::AstNodeIdentifier`, `Tang::AstNodeFunctionDeclaration`, `Tang::AstNodeFunctionCall`, `Tang::AstNodeFor`, `Tang::AstNodeFloat`, `Tang::AstNodeDoWhile`, `Tang::AstNodeContinue`, `Tang::AstNodeCast`, `Tang::AstNodeBreak`, `Tang::AstNodeBoolean`, `Tang::AstNodeBlock`, `Tang::AstNodeBinary`, `Tang::AstNodeAssign`, and `Tang::AstNodeArray`.

Here is the call graph for this function:



The documentation for this class was generated from the following files:


- `include/astNode.hpp`
- `src/astNode.cpp`

## 5.2 Tang::AstNodeArray Class Reference


An [AstNode](#) that represents an array literal.

```
#include <astNodeArray.hpp>
```

Inheritance diagram for Tang::AstNodeArray:

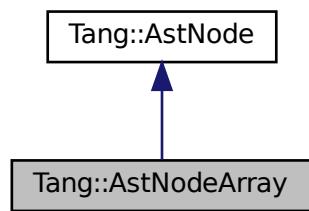

Collaboration diagram for Tang::AstNodeArray:

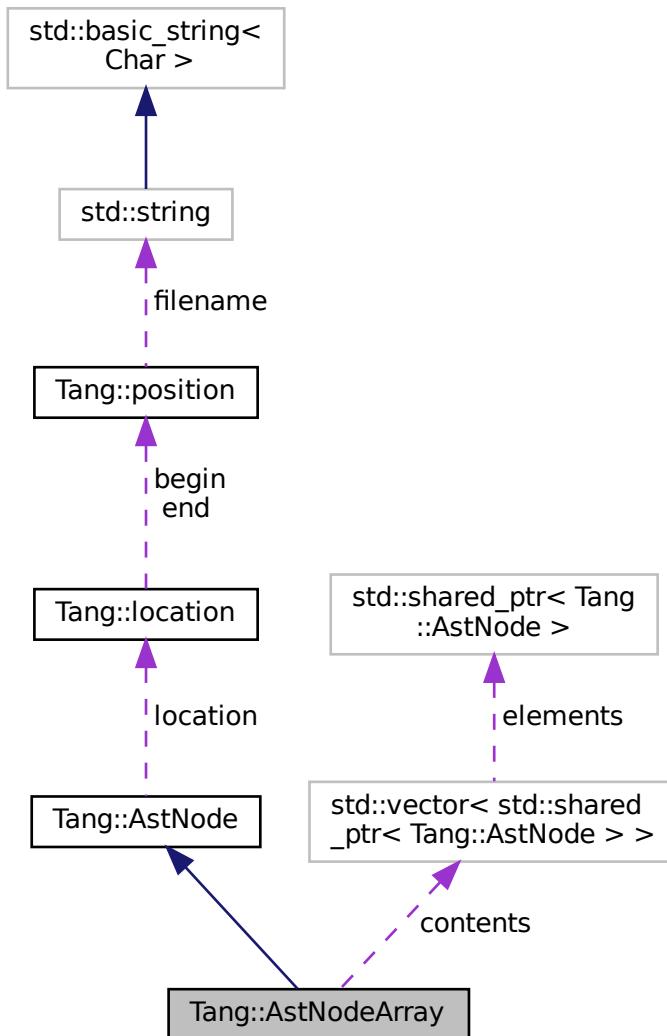

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeArray (std::vector< std::shared_ptr< Tang::AstNode >> contents, Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*
- `virtual void compile (Tang::Program &program) const override`

*Compile the ast of the provided `Tang::Program`.*

- `virtual void compilePreprocess (Program &program, PreprocessState state) const override`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `std::vector< std::shared_ptr< Tang::AstNode > > contents`  
*The contents of the array.*

### 5.2.1 Detailed Description

An `AstNode` that represents an array literal.

### 5.2.2 Member Enumeration Documentation

#### 5.2.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.2.3 Constructor & Destructor Documentation

#### 5.2.3.1 AstNodeArray()

```
AstNodeArray::AstNodeArray (
    std::vector< std::shared_ptr< Tang::AstNode > >> contents,
    Tang::location location )
```

The constructor.

## Parameters

<i>contents</i>	The contents of the array.
<i>location</i>	The location associated with the expression.

## 5.2.4 Member Function Documentation

### 5.2.4.1 compile()

```
void AstNodeArray::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

## Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:



### 5.2.4.2 compilePreprocess()

```
void AstNodeArray::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

## Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

### 5.2.4.3 `dump()`

```
string AstNodeArray::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

#### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

#### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeArray.hpp](#)
- [src/astNodeArray.cpp](#)

## 5.3 Tang::AstNodeAssign Class Reference


An [AstNode](#) that represents a binary expression.

```
#include <astNodeAssign.hpp>
```

Inheritance diagram for Tang::AstNodeAssign:

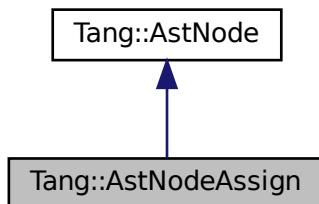

Collaboration diagram for Tang::AstNodeAssign:

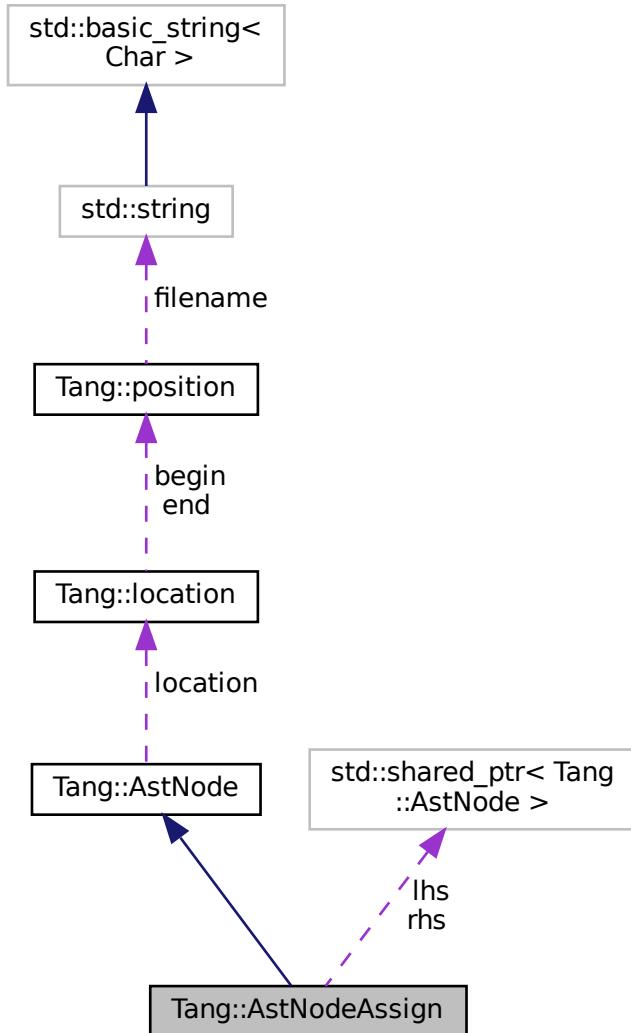

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeAssign (std::shared_ptr<AstNode> lhs, std::shared_ptr<AstNode> rhs, Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*
- `virtual void compile (Tang::Program &program) const override`

*Compile the ast of the provided [Tang::Program](#).*

- `virtual void compilePreprocess (Program &program, PreprocessState state) const override`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `std::shared_ptr< AstNode > lhs`  
*The left hand side expression.*
- `std::shared_ptr< AstNode > rhs`  
*The right hand side expression.*

### 5.3.1 Detailed Description

An [AstNode](#) that represents a binary expression.

### 5.3.2 Member Enumeration Documentation

#### 5.3.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<a href="#">AstNode</a> is part of an assignment expression.

### 5.3.3 Constructor & Destructor Documentation

#### 5.3.3.1 AstNodeAssign()

```
AstNodeAssign::AstNodeAssign (
    std::shared_ptr< AstNode > lhs,
```

```
std::shared_ptr< AstNode > rhs,
Tang::location location )
```

The constructor.

#### Parameters

<i>lhs</i>	The left hand side expression.
<i>rhs</i>	The right hand side expression.
<i>location</i>	The location associated with the expression.

### 5.3.4 Member Function Documentation

#### 5.3.4.1 compile()

```
void AstNodeAssign::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

#### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

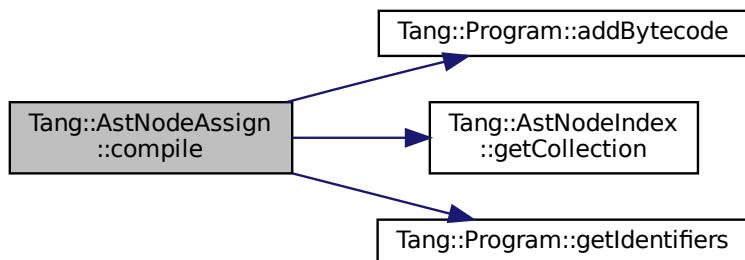

### 5.3.4.2 compilePreprocess()

```
void AstNodeAssign::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

#### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

### 5.3.4.3 dump()

```
string AstNodeAssign::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

#### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

#### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeAssign.hpp](#)
- [src/astNodeAssign.cpp](#)

## 5.4 Tang::AstNodeBinary Class Reference


An [AstNode](#) that represents a binary expression.

```
#include <astNodeBinary.hpp>
```

Inheritance diagram for Tang::AstNodeBinary:

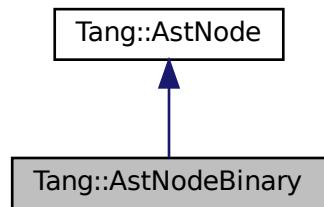

Collaboration diagram for Tang::AstNodeBinary:

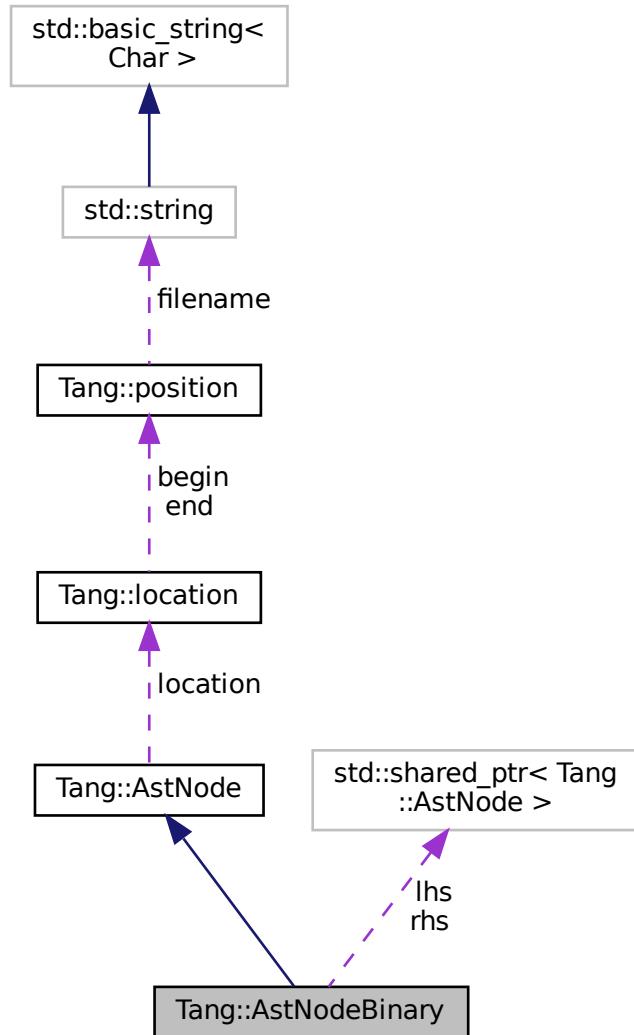

## Public Types

- enum `Operation` {
 `Add` , `Subtract` , `Multiply` , `Divide` ,
 `Modulo` , `LessThan` , `LessThanEqual` , `GreaterThan` ,
 `GreaterThanEqual` , `Equal` , `NotEqual` , `And` ,
 `Or` }
 

*Indicates the type of binary expression that this node represents.*
- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
 

*Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeBinary (Operation op, std::shared_ptr< AstNode > lhs, std::shared_ptr< AstNode > rhs, Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*
- `virtual void compile (Tang::Program &program) const override`  
*Compile the ast of the provided Tang::Program.*
- `virtual void compilePreprocess (Program &program, PreprocessState state) const override`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `Operation op`  
*The binary operation performed.*
- `std::shared_ptr< AstNode > lhs`  
*The left hand side expression.*
- `std::shared_ptr< AstNode > rhs`  
*The right hand side expression.*

### 5.4.1 Detailed Description

An `AstNode` that represents a binary expression.

### 5.4.2 Member Enumeration Documentation

#### 5.4.2.1 Operation

```
enum Tang::AstNodeBinary::Operation
```

Indicates the type of binary expression that this node represents.

#### Enumerator

Add	Indicates lhs + rhs.
Subtract	Indicates lhs - rhs.
Multiply	Indicates lhs * rhs.
Divide	Indicates lhs / rhs.
Modulo	Indicates lhs % rhs.
LessThan	Indicates lhs < rhs.
LessThanEqual	Indicates lhs <= rhs.
GreaterThan	Indicates lhs > rhs.
GreaterThanEqual	Indicates lhs >= rhs.
Equal	Indicates lhs == rhs.

### 5.4.2.2 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<a href="#">AstNode</a> is part of an assignment expression.

### 5.4.3 Constructor & Destructor Documentation

#### 5.4.3.1 AstNodeBinary()

```
AstNodeBinary::AstNodeBinary (
    Operation op,
    std::shared_ptr< AstNode > lhs,
    std::shared_ptr< AstNode > rhs,
    Tang::location location )
```

The constructor.

Parameters

<i>op</i>	The <a href="#">Tang::AstNodeBinary::Operation</a> to perform.
<i>lhs</i>	The left hand side expression.
<i>rhs</i>	The right hand side expression.
<i>location</i>	The location associated with the expression.

### 5.4.4 Member Function Documentation

#### 5.4.4.1 compile()

```
void AstNodeBinary::compile (
    Tang::Program & program ) const [override], [virtual]
```

Compile the ast of the provided [Tang::Program](#).

## Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

#### 5.4.4.2 compilePreprocess()

```
void AstNodeBinary::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

## Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

#### 5.4.4.3 dump()

```
string AstNodeBinary::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

## Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

## Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeBinary.hpp](#)
- [src/astNodeBinary.cpp](#)

## 5.5 Tang::AstNodeBlock Class Reference


An [AstNode](#) that represents a code block.

```
#include <astNodeBlock.hpp>
```

Inheritance diagram for Tang::AstNodeBlock:

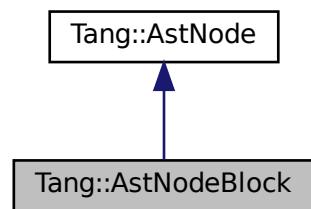

## Collaboration diagram for Tang::AstNodeBlock:

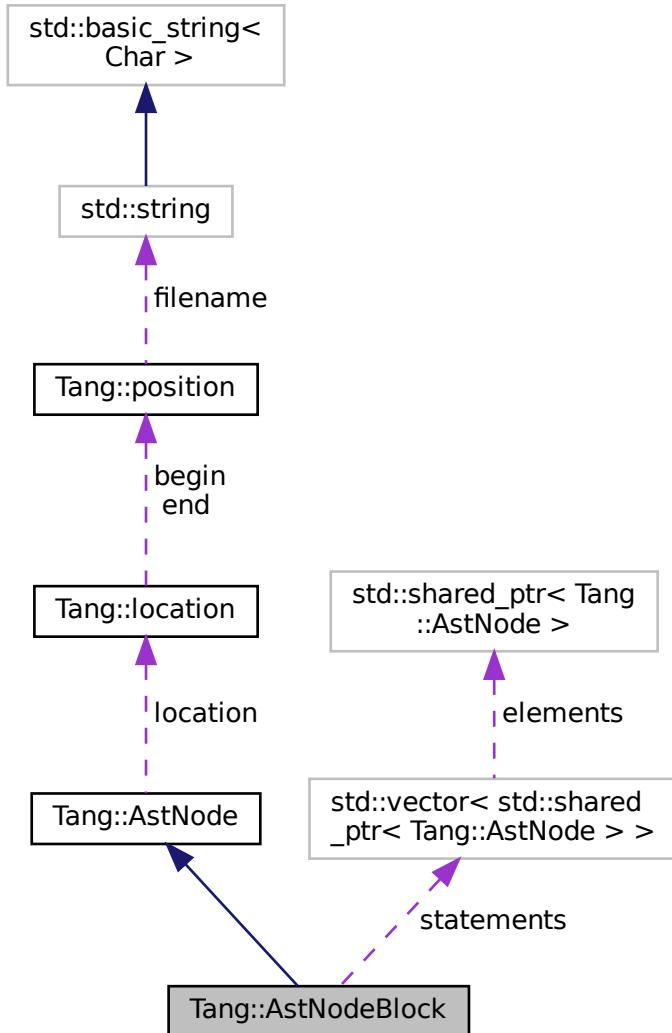

## Public Types

- enum **PreprocessState** : int { **Default** = 0 , **IsAssignment** = 1 }

*Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeBlock (const std::vector< std::shared_ptr< AstNode >> &statements, Tang::location location)`  
*The constructor.*
  - `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*
  - `virtual void compile (Tang::Program &program) const override`

*Compile the ast of the provided `Tang::Program`.*

- `virtual void compilePreprocess (Program &program, PreprocessState state) const override`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `std::vector< std::shared_ptr< AstNode > > statements`  
*The statements included in the code block.*

### 5.5.1 Detailed Description

An `AstNode` that represents a code block.

### 5.5.2 Member Enumeration Documentation

#### 5.5.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.5.3 Constructor & Destructor Documentation

#### 5.5.3.1 AstNodeBlock()

```
AstNodeBlock::AstNodeBlock (
    const std::vector< std::shared_ptr< AstNode > >& statements,
    Tang::location location )
```

The constructor.

## Parameters

<i>statements</i>	The statements of the code block.
<i>location</i>	The location associated with the expression.

## 5.5.4 Member Function Documentation

### 5.5.4.1 compile()

```
void AstNodeBlock::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

## Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:



### 5.5.4.2 compilePreprocess()

```
void AstNodeBlock::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

## Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

### 5.5.4.3 `dump()`

```
string AstNodeBlock::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

#### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

#### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeBlock.hpp](#)
- [src/astNodeBlock.cpp](#)

## 5.6 Tang::AstNodeBoolean Class Reference


An [AstNode](#) that represents a boolean literal.

```
#include <astNodeBoolean.hpp>
```

Inheritance diagram for Tang::AstNodeBoolean:

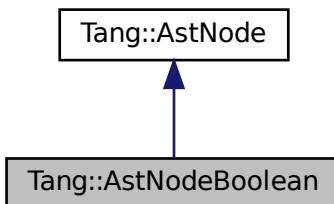

Collaboration diagram for Tang::AstNodeBoolean:

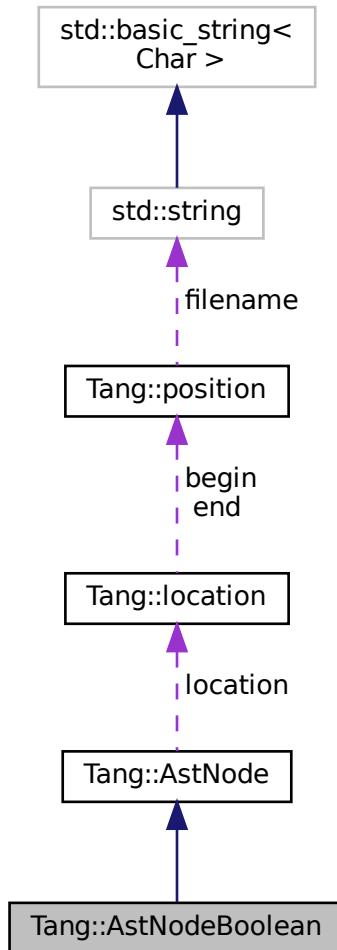

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeBoolean (bool val, Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*
- `virtual void compile (Tang::Program &program) const override`  
*Compile the ast of the provided `Tang::Program`.*
- `virtual void compilePreprocess (Program &program, PreprocessState state) const`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- [Tang::location location](#)  
*The location associated with this node.*

## Private Attributes

- bool [val](#)  
*The boolean value being stored.*

### 5.6.1 Detailed Description

An [AstNode](#) that represents a boolean literal.

### 5.6.2 Member Enumeration Documentation

#### 5.6.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

##### Enumerator

Default	The default state.
IsAssignment	<a href="#">AstNode</a> is part of an assignment expression.

### 5.6.3 Constructor & Destructor Documentation

#### 5.6.3.1 AstNodeBoolean()

```
AstNodeBoolean::AstNodeBoolean (
    bool val,
    Tang::location location )
```

The constructor.

##### Parameters

<a href="#">val</a>	The boolean to represent.
<a href="#">location</a>	The location associated with the expression.

## 5.6.4 Member Function Documentation

### 5.6.4.1 compile()

```
void AstNodeBoolean::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

#### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:



### 5.6.4.2 compilePreprocess()

```
void AstNode::compilePreprocess (
    Program & program,
    PreprocessState state ) const [virtual], [inherited]
```

Run any preprocess analysis needed before compilation.

#### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented in [Tang::AstNodeWhile](#), [Tang::AstNodeUse](#), [Tang::AstNodeUnary](#), [Tang::AstNodeTernary](#), [Tang::AstNodeString](#), [Tang::AstNodeSlice](#), [Tang::AstNodeReturn](#), [Tang::AstNodeRangedFor](#), [Tang::AstNodePrint](#), [Tang::AstNodePeriod](#), [Tang::AstNodeMap](#), [Tang::AstNodeLibrary](#), [Tang::AstNodeIndex](#), [Tang::AstNodeIfElse](#), [Tang::AstNodeIdentifier](#), [Tang::AstNodeFunctionDeclaration](#), [Tang::AstNodeFunctionCall](#), [Tang::AstNodeFor](#), [Tang::AstNodeDoWhile](#), [Tang::AstNodeCast](#), [Tang::AstNodeBlock](#), [Tang::AstNodeBinary](#), [Tang::AstNodeAssign](#), and [Tang::AstNodeArray](#).

### 5.6.4.3 `dump()`

```
string AstNodeBoolean::dump (
```

<code>std::string indent = ""</code>	) const [override], [virtual]
--------------------------------------	-------------------------------

Return a string that describes the contents of the node.

#### Parameters

<code>indent</code>	A string used to indent the dump.
---------------------	-----------------------------------

#### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeBoolean.hpp](#)
- [src/astNodeBoolean.cpp](#)

## 5.7 Tang::AstNodeBreak Class Reference


An [AstNode](#) that represents a `break` statement.

```
#include <astNodeBreak.hpp>
```

Inheritance diagram for Tang::AstNodeBreak:

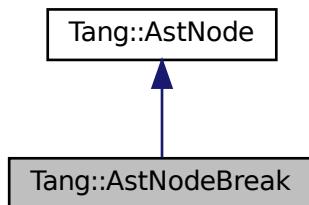

Collaboration diagram for Tang::AstNodeBreak:

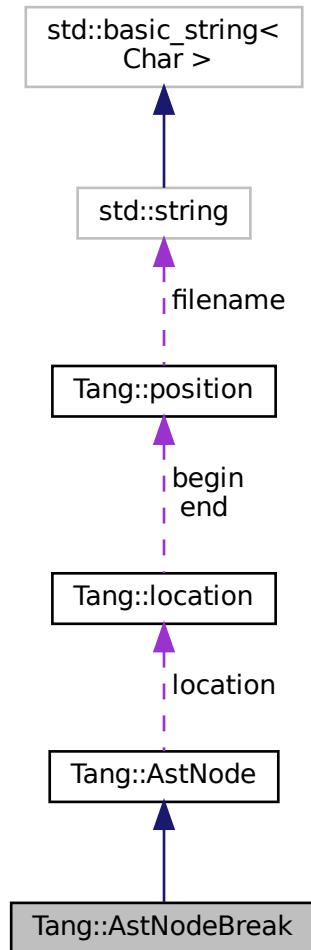

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeBreak (Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*
- `virtual void compile (Tang::Program &program) const override`  
*Compile the ast of the provided `Tang::Program`.*
- `virtual void compilePreprocess (Program &program, PreprocessState state) const`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

### 5.7.1 Detailed Description

An `AstNode` that represents a `break` statement.

### 5.7.2 Member Enumeration Documentation

#### 5.7.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

##### Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.7.3 Constructor & Destructor Documentation

#### 5.7.3.1 AstNodeBreak()

```
AstNodeBreak::AstNodeBreak ( Tang::location location )
```

The constructor.

##### Parameters

<code>location</code>	The location associated with the expression.
-----------------------	--

### 5.7.4 Member Function Documentation

### 5.7.4.1 compile()

```
void AstNodeBreak::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

#### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

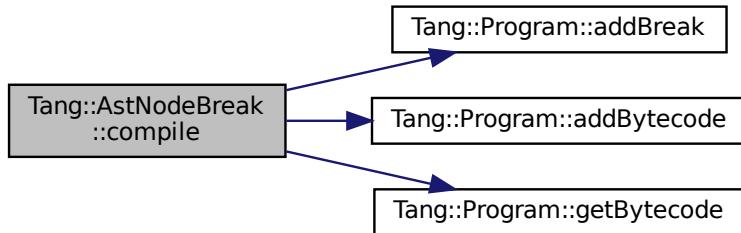

### 5.7.4.2 compilePreprocess()

```
void AstNode::compilePreprocess (
    Program & program,
    PreprocessState state ) const [virtual], [inherited]
```

Run any preprocess analysis needed before compilation.

#### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented in [Tang::AstNodeWhile](#), [Tang::AstNodeUse](#), [Tang::AstNodeUnary](#), [Tang::AstNodeTernary](#), [Tang::AstNodeString](#), [Tang::AstNodeSlice](#), [Tang::AstNodeReturn](#), [Tang::AstNodeRangedFor](#), [Tang::AstNodePrint](#), [Tang::AstNodePeriod](#), [Tang::AstNodeMap](#), [Tang::AstNodeLibrary](#), [Tang::AstNodeIndex](#), [Tang::AstNodeIfElse](#), [Tang::AstNodeIdentifier](#), [Tang::AstNodeFunctionDeclaration](#), [Tang::AstNodeFunctionCall](#), [Tang::AstNodeFor](#), [Tang::AstNodeDoWhile](#), [Tang::AstNodeCast](#), [Tang::AstNodeBlock](#), [Tang::AstNodeBinary](#), [Tang::AstNodeAssign](#), and [Tang::AstNodeArray](#).

### 5.7.4.3 `dump()`

```
string AstNodeBreak::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

#### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

#### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeBreak.hpp](#)
- [src/astNodeBreak.cpp](#)

## 5.8 Tang::AstNodeCast Class Reference


An [AstNode](#) that represents a typecast of an expression.

```
#include <astNodeCast.hpp>
```

Inheritance diagram for Tang::AstNodeCast:

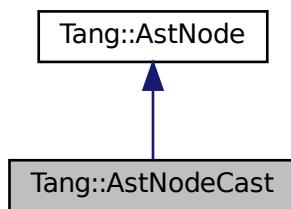

Collaboration diagram for Tang::AstNodeCast:

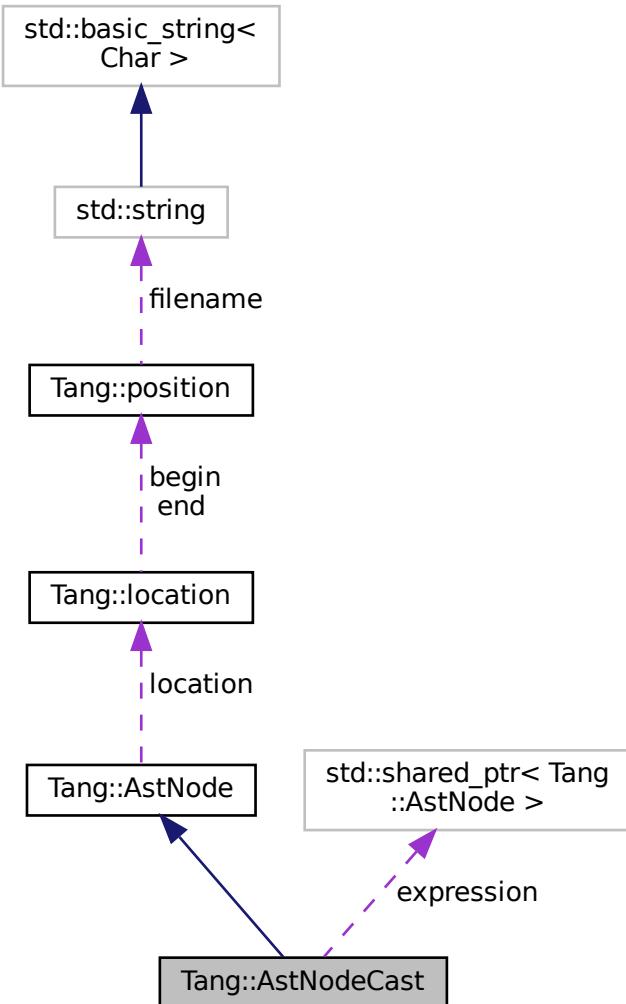

## Public Types

- enum **Type** { **Integer** , **Float** , **Boolean** , **String** }  
*The possible types that can be cast to.*
- enum **PreprocessState** : int { **Default** = 0 , **IsAssignment** = 1 }  
*Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- AstNodeCast** (**Type** **targetType**, **std::shared\_ptr< AstNode >** **expression**, **Tang::location** **location**)  
*The constructor.*
- virtual **std::string** **dump** (**std::string** **indent**=**""**) const override

*Return a string that describes the contents of the node.*

- virtual void `compile (Tang::Program &program)` const override  
*Compile the ast of the provided Tang::Program.*
- virtual void `compilePreprocess (Program &program, PreprocessState state)` const override  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `Type targetType`  
*The target type.*
- `std::shared_ptr< AstNode > expression`  
*The expression being typecast.*

### 5.8.1 Detailed Description

An `AstNode` that represents a typecast of an expression.

### 5.8.2 Member Enumeration Documentation

#### 5.8.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

##### Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

#### 5.8.2.2 Type

```
enum Tang::AstNodeCast::Type
```

The possible types that can be cast to.

## Enumerator

Integer	Cast to a <a href="#">Tang::ComputedExpressionInteger</a> .
Float	Cast to a <a href="#">Tang::ComputedExpressionFloat</a> .
Boolean	Cast to a <a href="#">Tang::ComputedExpressionBoolean</a> .
String	Cast to a <a href="#">Tang::ComputedExpressionString</a> .

**5.8.3 Constructor & Destructor Documentation****5.8.3.1 AstNodeCast()**

```
AstNodeCast::AstNodeCast (
    Type targetType,
    std::shared_ptr< AstNode > expression,
    Tang::location location )
```

The constructor.

**Parameters**

<i>targetType</i>	The target type that the expression will be cast to.
<i>expression</i>	The expression to be typecast.
<i>location</i>	The location associated with this node.

**5.8.4 Member Function Documentation****5.8.4.1 compile()**

```
void AstNodeCast::compile (
    Tang::Program & program ) const [override], [virtual]
```

Compile the ast of the provided [Tang::Program](#).

**Parameters**

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

### 5.8.4.2 compilePreprocess()

```
void AstNodeCast::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

#### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

### 5.8.4.3 dump()

```
string AstNodeCast::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

#### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

#### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeCast.hpp](#)
- [src/astNodeCast.cpp](#)

## 5.9 Tang::AstNodeContinue Class Reference


An [AstNode](#) that represents a `continue` statement.

```
#include <astNodeContinue.hpp>
```

Inheritance diagram for Tang::AstNodeContinue:

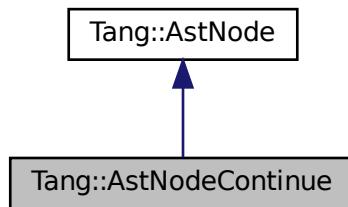

Collaboration diagram for Tang::AstNodeContinue:

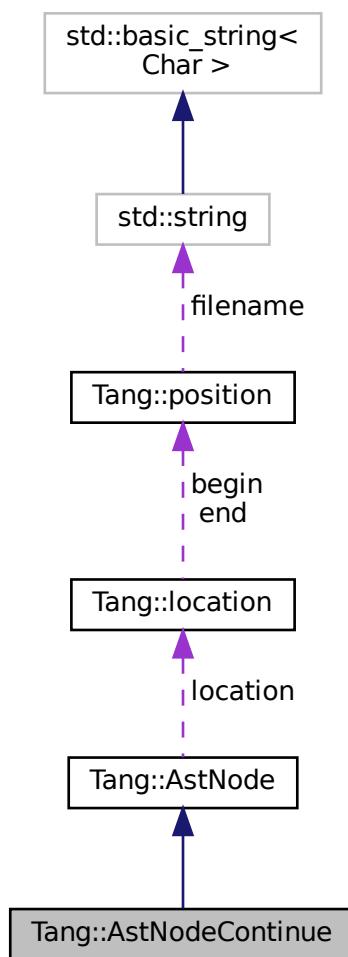

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeContinue (Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*
- `virtual void compile (Tang::Program &program) const override`  
*Compile the ast of the provided `Tang::Program`.*
- `virtual void compilePreprocess (Program &program, PreprocessState state) const`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

### 5.9.1 Detailed Description

An `AstNode` that represents a `continue` statement.

### 5.9.2 Member Enumeration Documentation

#### 5.9.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

<code>Default</code>	The default state.
<code>IsAssignment</code>	<code>AstNode</code> is part of an assignment expression.

### 5.9.3 Constructor & Destructor Documentation

### 5.9.3.1 `AstNodeContinue()`

```
AstNodeContinue::AstNodeContinue (
    Tang::location location )
```

The constructor.

#### Parameters

<i>location</i>	The location associated with the expression.
-----------------	--

## 5.9.4 Member Function Documentation

### 5.9.4.1 `compile()`

```
void AstNodeContinue::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

#### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

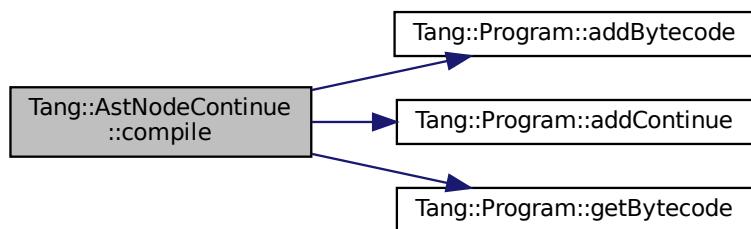

### 5.9.4.2 compilePreprocess()

```
void AstNode::compilePreprocess (
    Program & program,
    PreprocessState state ) const [virtual], [inherited]
```

Run any preprocess analysis needed before compilation.

#### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented in [Tang::AstNodeWhile](#), [Tang::AstNodeUse](#), [Tang::AstNodeUnary](#), [Tang::AstNodeTernary](#), [Tang::AstNodeString](#), [Tang::AstNodeSlice](#), [Tang::AstNodeReturn](#), [Tang::AstNodeRangedFor](#), [Tang::AstNodePrint](#), [Tang::AstNodePeriod](#), [Tang::AstNodeMap](#), [Tang::AstNodeLibrary](#), [Tang::AstNodeIndex](#), [Tang::AstNodeIfElse](#), [Tang::AstNodeIdentifier](#), [Tang::AstNodeFunctionDeclaration](#), [Tang::AstNodeFunctionCall](#), [Tang::AstNodeFor](#), [Tang::AstNodeDoWhile](#), [Tang::AstNodeCast](#), [Tang::AstNodeBlock](#), [Tang::AstNodeBinary](#), [Tang::AstNodeAssign](#), and [Tang::AstNodeArray](#).

### 5.9.4.3 dump()

```
string AstNodeContinue::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

#### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

#### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeContinue.hpp](#)
- [src/astNodeContinue.cpp](#)

## 5.10 Tang::AstNodeDoWhile Class Reference


An [AstNode](#) that represents a do..while statement.

```
#include <astNodeDoWhile.hpp>
```

Inheritance diagram for Tang::AstNodeDoWhile:

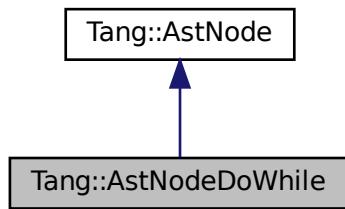

Collaboration diagram for Tang::AstNodeDoWhile:

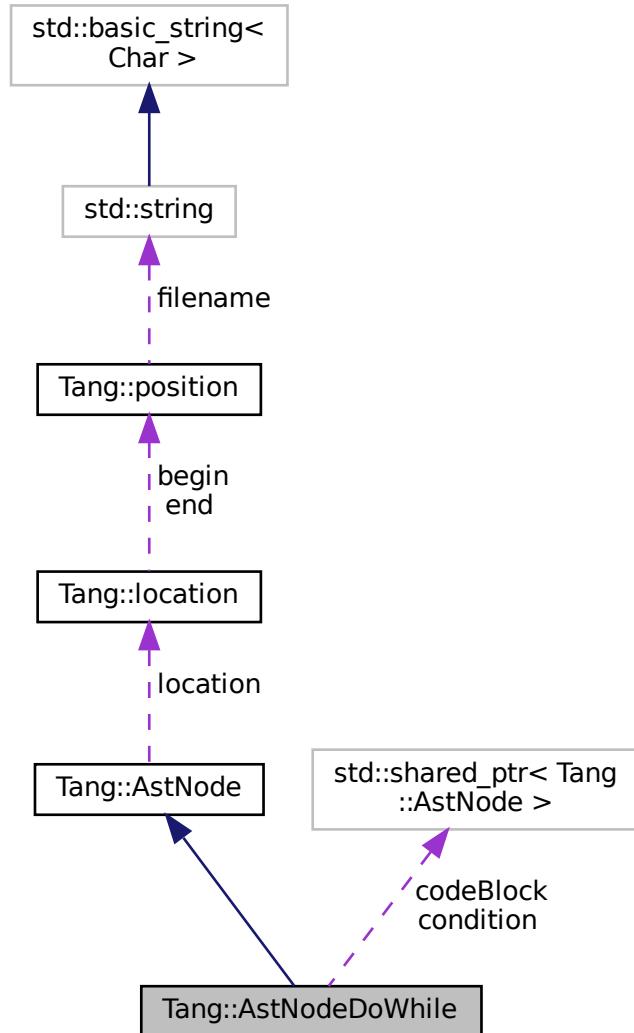

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeDoWhile (std::shared_ptr< AstNode > condition, std::shared_ptr< AstNode > codeBlock, Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*

- virtual void `compile (Tang::Program &program)` const override  
*Compile the ast of the provided `Tang::Program`.*
- virtual void `compilePreprocess (Program &program, PreprocessState state)` const override  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `std::shared_ptr< AstNode > condition`  
*The expression which determines whether or not the code block will continue to be executed.*
- `std::shared_ptr< AstNode > codeBlock`  
*The code block executed when the condition is true.*

### 5.10.1 Detailed Description

An `AstNode` that represents a do..while statement.

### 5.10.2 Member Enumeration Documentation

#### 5.10.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.10.3 Constructor & Destructor Documentation

#### 5.10.3.1 AstNodeDoWhile()

```
AstNodeDoWhile::AstNodeDoWhile (
    std::shared_ptr< AstNode > condition,
```

```
std::shared_ptr< AstNode > codeBlock,
Tang::location location )
```

The constructor.

#### Parameters

<i>condition</i>	The expression which determines whether the thenBlock or elseBlock is executed.
<i>codeBlock</i>	The statement executed when the condition is true.
<i>location</i>	The location associated with the expression.

## 5.10.4 Member Function Documentation

### 5.10.4.1 compile()

```
void AstNodeDoWhile::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

#### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

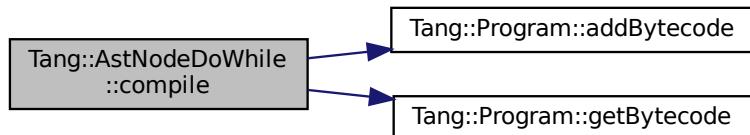

### 5.10.4.2 compilePreprocess()

```
void AstNodeDoWhile::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

## Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

#### 5.10.4.3 `dump()`

```
string AstNodeDoWhile::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

## Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

## Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- `include/astNodeDoWhile.hpp`
- `src/astNodeDoWhile.cpp`

## 5.11 Tang::AstNodeFloat Class Reference


An [AstNode](#) that represents an float literal.

```
#include <astNodeFloat.hpp>
```

Inheritance diagram for Tang::AstNodeFloat:

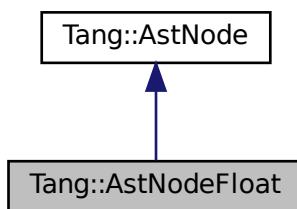

Collaboration diagram for Tang::AstNodeFloat:

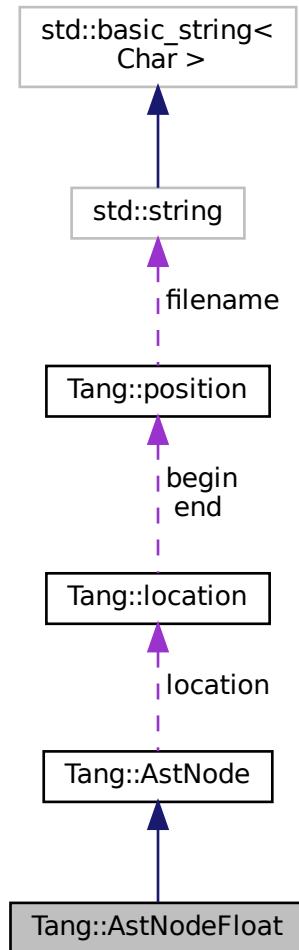

## Public Types

- enum **PreprocessState** : int { **Default** = 0 , **IsAssignment** = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- AstNodeFloat (Tang::float\_t number, Tang::location location)**  
*The constructor.*
- virtual std::string dump (std::string indent="") const override**  
*Return a string that describes the contents of the node.*
- virtual void compile (Tang::Program &program) const override**  
*Compile the ast of the provided Tang::Program.*
- virtual void compilePreprocess (Program &program, PreprocessState state) const**  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `Tang::float_t val`  
*The float value being stored.*

### 5.11.1 Detailed Description

An [AstNode](#) that represents an float literal.

Integers are represented by the `Tang::float_t` type, and so are limited in range by that of the underlying type.

### 5.11.2 Member Enumeration Documentation

#### 5.11.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<a href="#">AstNode</a> is part of an assignment expression.

### 5.11.3 Constructor & Destructor Documentation

#### 5.11.3.1 AstNodeFloat()

```
AstNodeFloat::AstNodeFloat (
    Tang::float_t number,
    Tang::location location )
```

The constructor.

## Parameters

<i>number</i>	The number to represent.
<i>location</i>	The location associated with the expression.

**5.11.4 Member Function Documentation****5.11.4.1 compile()**

```
void AstNodeFloat::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

## Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

**5.11.4.2 compilePreprocess()**

```
void AstNode::compilePreprocess (
    Program & program,
    PreprocessState state ) const [virtual], [inherited]
```

Run any preprocess analysis needed before compilation.

## Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented in [Tang::AstNodeWhile](#), [Tang::AstNodeUse](#), [Tang::AstNodeUnary](#), [Tang::AstNodeTernary](#), [Tang::AstNodeString](#), [Tang::AstNodeSlice](#), [Tang::AstNodeReturn](#), [Tang::AstNodeRangedFor](#), [Tang::AstNodePrint](#), [Tang::AstNodePeriod](#), [Tang::AstNodeMap](#), [Tang::AstNodeLibrary](#), [Tang::AstNodeIndex](#), [Tang::AstNodeIfElse](#), [Tang::AstNodeIdentifier](#), [Tang::AstNodeFunctionDeclaration](#), [Tang::AstNodeFunctionCall](#), [Tang::AstNodeFor](#), [Tang::AstNodeDoWhile](#), [Tang::AstNodeCast](#), [Tang::AstNodeBlock](#), [Tang::AstNodeBinary](#), [Tang::AstNodeAssign](#), and [Tang::AstNodeArray](#).

#### 5.11.4.3 `dump()`

```
string AstNodeFloat::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

##### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

##### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeFloat.hpp](#)
- [src/astNodeFloat.cpp](#)

## 5.12 Tang::AstNodeFor Class Reference


An [AstNode](#) that represents an if() statement.

```
#include <astNodeFor.hpp>
```

Inheritance diagram for Tang::AstNodeFor:

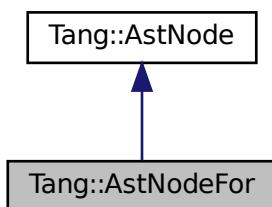

## Collaboration diagram for Tang::AstNodeFor:

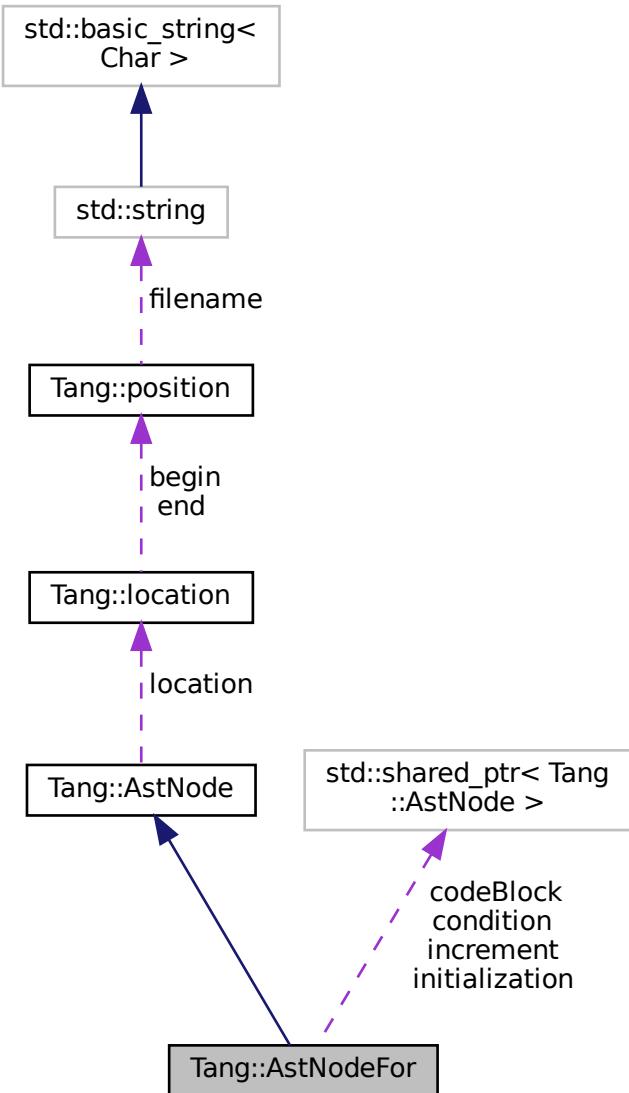

## Public Types

- enum **PreprocessState** : int { **Default** = 0 , **IsAssignment** = 1 }  
*Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeFor` (`std::shared_ptr< AstNode > initialization, std::shared_ptr< AstNode > condition, std::shared_ptr< AstNode > increment, std::shared_ptr< AstNode > codeBlock, Tang::location location)`  
*The constructor.*

- virtual std::string `dump` (std::string `indent=""`) const override  
*Return a string that describes the contents of the node.*
- virtual void `compile` (`Tang::Program` &`program`) const override  
*Compile the ast of the provided `Tang::Program`.*
- virtual void `compilePreprocess` (`Program` &`program`, `PreprocessState` `state`) const override  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location` `location`  
*The location associated with this node.*

## Private Attributes

- `std::shared_ptr<AstNode>` `initialization`  
*The expression to be executed first to set up the for() loop.*
- `std::shared_ptr<AstNode>` `condition`  
*The expression which determines whether or not the code block will continue to be executed.*
- `std::shared_ptr<AstNode>` `increment`  
*The expression to be executed immediately after the code block.*
- `std::shared_ptr<AstNode>` `codeBlock`  
*The code block executed when the condition is true.*

### 5.12.1 Detailed Description

An `AstNode` that represents an if() statement.

### 5.12.2 Member Enumeration Documentation

#### 5.12.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

##### Enumerator

<code>Default</code>	The default state.
<code>IsAssignment</code>	<code>AstNode</code> is part of an assignment expression.

### 5.12.3 Constructor & Destructor Documentation

#### 5.12.3.1 AstNodeFor()

```
AstNodeFor::AstNodeFor (
    std::shared_ptr< AstNode > initialization,
    std::shared_ptr< AstNode > condition,
    std::shared_ptr< AstNode > increment,
    std::shared_ptr< AstNode > codeBlock,
    Tang::location location )
```

The constructor.

##### Parameters

<i>initialization</i>	The expression to be executed first.
<i>condition</i>	The expression which determines whether the codeBlock is executed.
<i>increment</i>	The expression to be executed after each codeBlock.
<i>codeBlock</i>	The statement executed when the condition is true.
<i>location</i>	The location associated with the expression.

### 5.12.4 Member Function Documentation

#### 5.12.4.1 compile()

```
void AstNodeFor::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

##### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

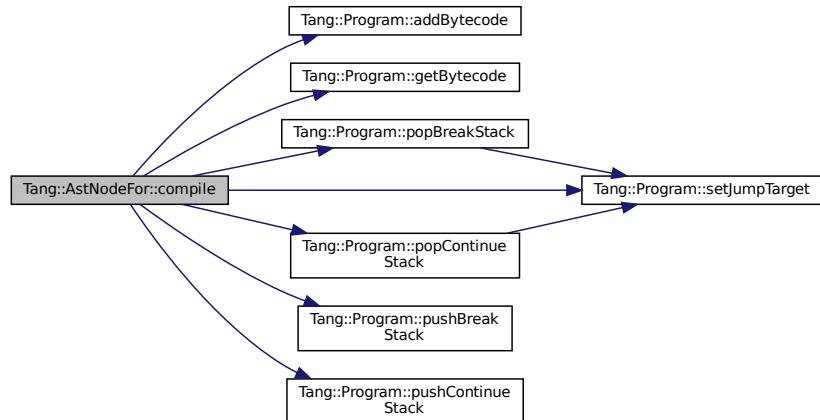

#### 5.12.4.2 compilePreprocess()

```
void AstNodeFor::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

##### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

#### 5.12.4.3 dump()

```
string AstNodeFor::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

##### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

**Returns**

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeFor.hpp](#)
- [src/astNodeFor.cpp](#)

## 5.13 Tang::AstNodeFunctionCall Class Reference


An [AstNode](#) that represents a function call.

```
#include <astNodeFunctionCall.hpp>
```

Inheritance diagram for Tang::AstNodeFunctionCall:

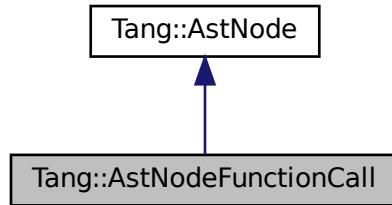

Collaboration diagram for Tang::AstNodeFunctionCall:

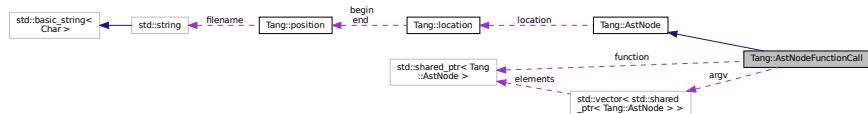

## Public Types

- enum [PreprocessState](#) : int { [Default](#) = 0 , [IsAssignment](#) = 1 }

*Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeFunctionCall` (`std::shared_ptr< AstNode > function, std::vector< std::shared_ptr< AstNode > > argv, Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*
- `virtual void compile (Tang::Program &program) const override`  
*Compile the ast of the provided Tang::Program.*
- `virtual void compilePreprocess (Program &program, PreprocessState state) const override`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `std::shared_ptr< AstNode > function`  
*The function being invoked.*
- `std::vector< std::shared_ptr< AstNode > > argv`  
*The list of arguments provided to the function.*

### 5.13.1 Detailed Description

An `AstNode` that represents a function call.

### 5.13.2 Member Enumeration Documentation

#### 5.13.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

#### Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.13.3 Constructor & Destructor Documentation

#### 5.13.3.1 AstNodeFunctionCall()

```
AstNodeFunctionCall::AstNodeFunctionCall (
    std::shared_ptr< AstNode > function,
    std::vector< std::shared_ptr< AstNode > >> argv,
    Tang::location location )
```

The constructor.

##### Parameters

<i>function</i>	The function being invoked.
<i>argv</i>	The list of arguments provided to the function.
<i>location</i>	The location associated with the expression.

### 5.13.4 Member Function Documentation

#### 5.13.4.1 compile()

```
void AstNodeFunctionCall::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

##### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

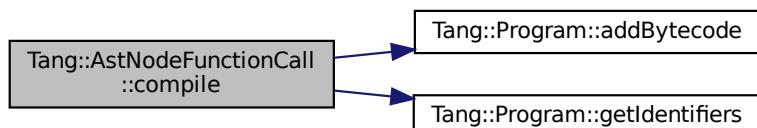

### 5.13.4.2 compilePreprocess()

```
void AstNodeFunctionCall::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

#### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

### 5.13.4.3 dump()

```
string AstNodeFunctionCall::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

#### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

#### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeFunctionCall.hpp](#)
- [src/astNodeFunctionCall.cpp](#)

## 5.14 Tang::AstNodeFunctionDeclaration Class Reference


An [AstNode](#) that represents a function declaration.

```
#include <astNodeFunctionDeclaration.hpp>
```

Inheritance diagram for Tang::AstNodeFunctionDeclaration:

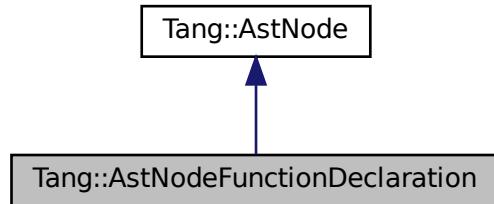

Collaboration diagram for Tang::AstNodeFunctionDeclaration:

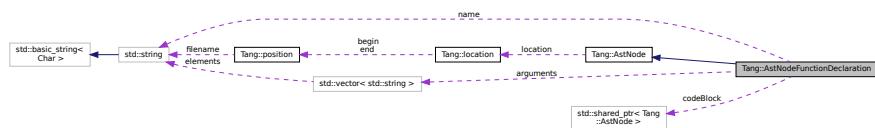

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeFunctionDeclaration (std::string name, std::vector< std::string > arguments, std::shared_ptr< AstNode > codeBlock, Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*
- `virtual void compile (Tang::Program &program) const override`  
*Compile the ast of the provided `Tang::Program`.*
- `virtual void compilePreprocess (Program &program, PreprocessState state) const override`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- std::string `name`  
*The name of the function.*
- std::vector< std::string > `arguments`  
*The arguments expected to be provided.*
- std::shared\_ptr< `AstNode` > `codeBlock`  
*The code block executed when the condition is true.*

### 5.14.1 Detailed Description

An `AstNode` that represents a function declaration.

### 5.14.2 Member Enumeration Documentation

#### 5.14.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.14.3 Constructor & Destructor Documentation

#### 5.14.3.1 AstNodeFunctionDeclaration()

```
AstNodeFunctionDeclaration::AstNodeFunctionDeclaration (
    std::string name,
    std::vector< std::string > arguments,
    std::shared_ptr< AstNode > codeBlock,
    Tang::location location )
```

The constructor.

Parameters

<code>name</code>	The name of the function.
<code>arguments</code>	The arguments expected to be provided.
<code>codeBlock</code>	The code executed as part of the function.
<code>location</code>	The location associated with the function declaration.

## 5.14.4 Member Function Documentation

### 5.14.4.1 compile()

```
void AstNodeFunctionDeclaration::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

#### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

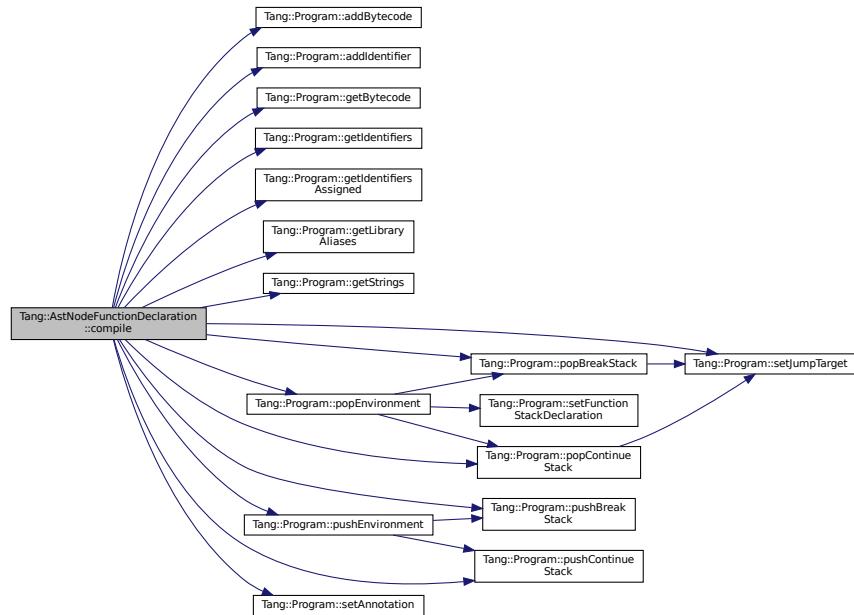

### 5.14.4.2 compilePreprocess()

```
void AstNodeFunctionDeclaration::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

## Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:



#### 5.14.4.3 `dump()`

```
string AstNodeFunctionDeclaration::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

## Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

## Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- `include/astNodeFunctionDeclaration.hpp`
- `src/astNodeFunctionDeclaration.cpp`

## 5.15 Tang::AstNodeIdentifier Class Reference


An [AstNode](#) that represents an identifier.

```
#include <astNodeIdentifier.hpp>
```

Inheritance diagram for Tang::AstNodeIdentifier:

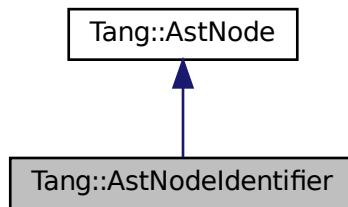

Collaboration diagram for Tang::AstNodeIdentifier:

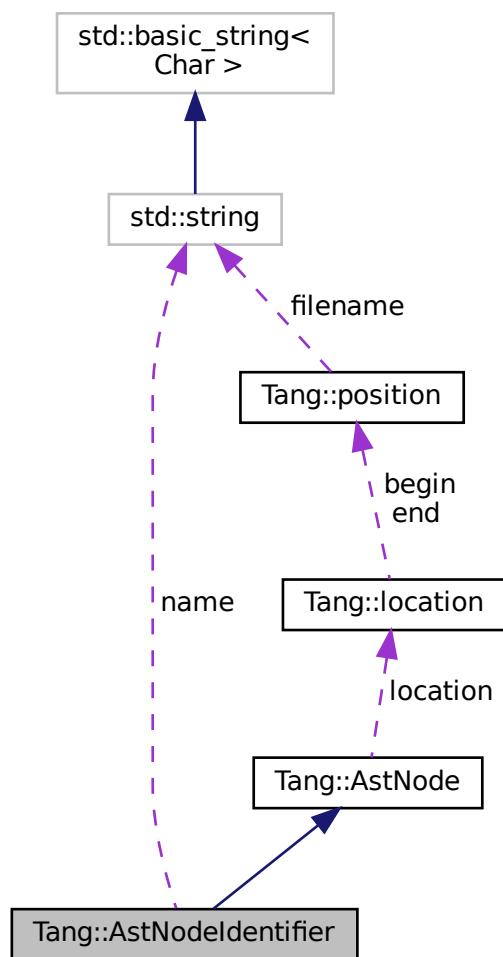

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeIdentifier` (const std::string &`name`, Tang::location `location`)  
*The constructor.*
- virtual std::string `dump` (std::string `indent`= "") const override  
*Return a string that describes the contents of the node.*
- virtual void `compile` (Tang::Program &`program`) const override  
*Compile the ast of the provided Tang::Program.*
- virtual void `compilePreprocess` (Program &`program`, PreprocessState `state`) const override  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- std::string `name`  
*The name of the identifier.*
- Tang::location `location`  
*The location associated with this node.*

### 5.15.1 Detailed Description

An `AstNode` that represents an identifier.

Identifier names are represented by a string.

### 5.15.2 Member Enumeration Documentation

#### 5.15.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

<code>Default</code>	The default state.
<code>IsAssignment</code>	<code>AstNode</code> is part of an assignment expression.

### 5.15.3 Constructor & Destructor Documentation

#### 5.15.3.1 AstNodeIdentifier()

```
AstNodeIdentifier::AstNodeIdentifier (
    const std::string & name,
    Tang::location location )
```

The constructor.

##### Parameters

<i>name</i>	The name of the identifier
<i>location</i>	The location associated with the expression.

### 5.15.4 Member Function Documentation

#### 5.15.4.1 compile()

```
void AstNodeIdentifier::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

##### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

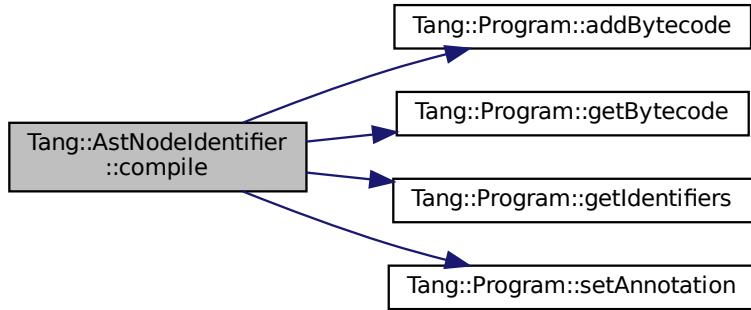

#### 5.15.4.2 compilePreprocess()

```
void AstNodeIdentifier::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```


Run any preprocess analysis needed before compilation.

##### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

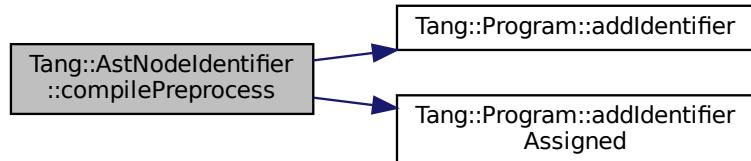

### 5.15.4.3 dump()

```
string AstNodeIdentifier::dump (
    std::string indent = "") const [override], [virtual]
```

Return a string that describes the contents of the node.

#### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

#### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeIdentifier.hpp](#)
- [src/astNodeIdentifier.cpp](#)

## 5.16 Tang::AstNodeIfElse Class Reference


An [AstNode](#) that represents an if..else statement.

```
#include <astNodeIfElse.hpp>
```

Inheritance diagram for Tang::AstNodeIfElse:

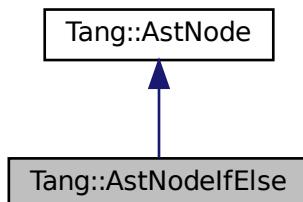

Collaboration diagram for Tang::AstNodeIfElse:

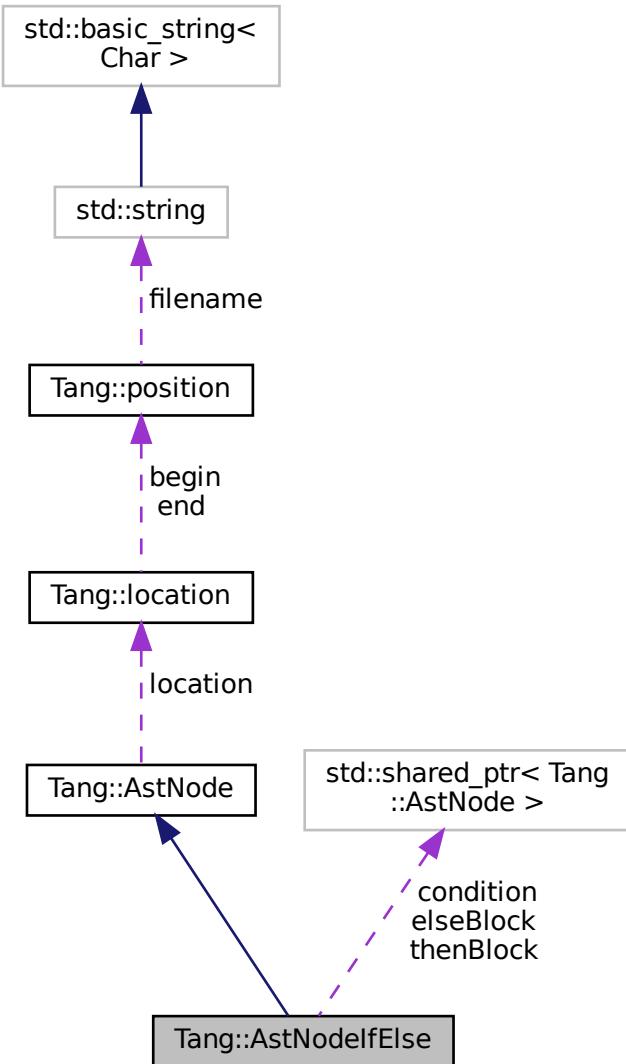

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeIfElse` (`std::shared_ptr< AstNode > condition`, `std::shared_ptr< AstNode > thenBlock`, `std::shared_ptr< AstNode > elseBlock`, `Tang::location location`)
- The constructor.*

- `AstNodeIfElse` (`std::shared_ptr< AstNode > condition, std::shared_ptr< AstNode > thenBlock, Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*
- `virtual void compile (Tang::Program &program) const override`  
*Compile the ast of the provided `Tang::Program`.*
- `virtual void compilePreprocess (Program &program, PreprocessState state) const override`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `std::shared_ptr< AstNode > condition`  
*The expression which determines whether the `thenBlock` or `elseBlock` is executed.*
- `std::shared_ptr< AstNode > thenBlock`  
*The statement executed when the condition is true.*
- `std::shared_ptr< AstNode > elseBlock`  
*The statement executed when the condition is false.*

### 5.16.1 Detailed Description

An `AstNode` that represents an if..else statement.

### 5.16.2 Member Enumeration Documentation

#### 5.16.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

##### Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.16.3 Constructor & Destructor Documentation

#### 5.16.3.1 `AstNodeIfElse()` [1/2]

```
AstNodeIfElse::AstNodeIfElse (
    std::shared_ptr< AstNode > condition,
    std::shared_ptr< AstNode > thenBlock,
    std::shared_ptr< AstNode > elseBlock,
    Tang::location location )
```

The constructor.

##### Parameters

<i>condition</i>	The expression which determines whether the thenBlock or elseBlock is executed.
<i>thenBlock</i>	The statement executed when the condition is true.
<i>elseBlock</i>	The statement executed when the condition is false.
<i>location</i>	The location associated with the expression.

#### 5.16.3.2 `AstNodeIfElse()` [2/2]

```
AstNodeIfElse::AstNodeIfElse (
    std::shared_ptr< AstNode > condition,
    std::shared_ptr< AstNode > thenBlock,
    Tang::location location )
```

The constructor.

##### Parameters

<i>condition</i>	The expression which determines whether the thenBlock or elseBlock is executed.
<i>thenBlock</i>	The statement executed when the condition is true.
<i>location</i>	The location associated with the expression.

### 5.16.4 Member Function Documentation

#### 5.16.4.1 `compile()`

```
void AstNodeIfElse::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided `Tang::Program`.

## Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

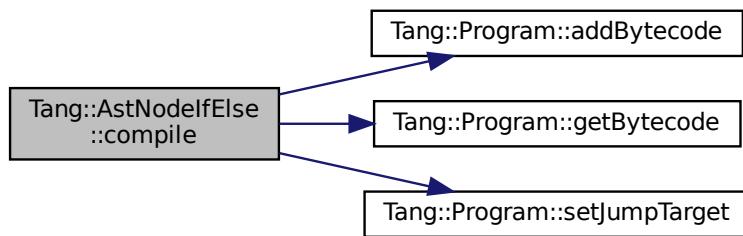

#### 5.16.4.2 compilePreprocess()

```
void AstNodeIfElse::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

## Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

#### 5.16.4.3 dump()

```
string AstNodeIfElse::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

**Parameters**

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

**Returns**

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeIfElse.hpp](#)
- [src/astNodeIfElse.cpp](#)

## 5.17 Tang::AstNodeIndex Class Reference


An [AstNode](#) that represents an index into a collection.

```
#include <astNodeIndex.hpp>
```

Inheritance diagram for Tang::AstNodeIndex:

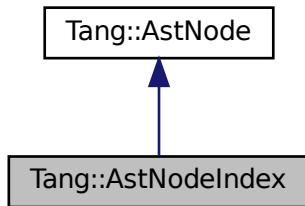

Collaboration diagram for Tang::AstNodeIndex:

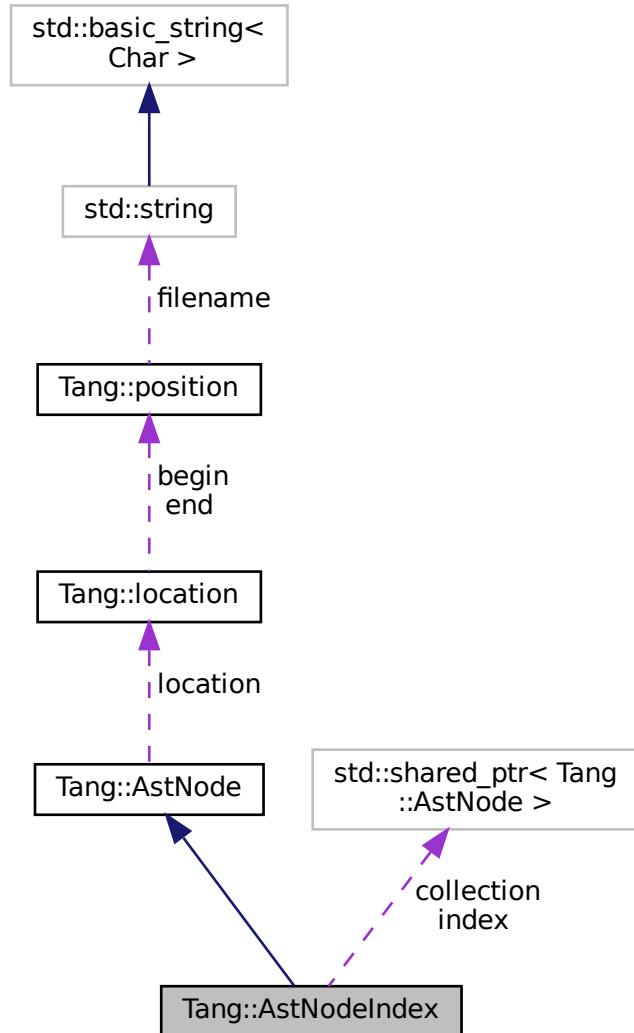

## Public Types

- enum **PreprocessState** : int { **Default** = 0 , **IsAssignment** = 1 }

*Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- AstNodeIndex** (**std::shared\_ptr< AstNode > collection**, **std::shared\_ptr< AstNode > index**, **Tang::location**)  
*The constructor.*
- virtual std::string dump** (**std::string indent=""**) **const override**  
*Return a string that describes the contents of the node.*

- virtual void `compile (Tang::Program &program)` const override  
*Compile the ast of the provided `Tang::Program`.*
- virtual void `compilePreprocess (Program &program, PreprocessState state)` const override  
*Run any preprocess analysis needed before compilation.*
- const std::shared\_ptr< const `AstNode` > `getCollection ()` const  
*Return a shared pointer to the `AstNode` serving as the Collection.*
- const std::shared\_ptr< const `AstNode` > `getIndex ()` const  
*Return a shared pointer to the `AstNode` serving as the Index.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `std::shared_ptr< AstNode > collection`  
*The collection into which we will index.*
- `std::shared_ptr< AstNode > index`  
*The index expression.*

### 5.17.1 Detailed Description

An `AstNode` that represents an index into a collection.

### 5.17.2 Member Enumeration Documentation

#### 5.17.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.17.3 Constructor & Destructor Documentation

### 5.17.3.1 AstNodeIndex()

```
AstNodeIndex::AstNodeIndex (
    std::shared_ptr< AstNode > collection,
    std::shared_ptr< AstNode > index,
    Tang::location location )
```

The constructor.

#### Parameters

<i>collection</i>	The collection into which we will index.
<i>index</i>	The index expression.
<i>location</i>	The location associated with the expression.

## 5.17.4 Member Function Documentation

### 5.17.4.1 compile()

```
void AstNodeIndex::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

#### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:



#### 5.17.4.2 compilePreprocess()

```
void AstNodeIndex::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

##### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

#### 5.17.4.3 dump()

```
string AstNodeIndex::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

##### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

##### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

#### 5.17.4.4 getCollection()

```
const std::shared_ptr< const AstNode > AstNodeIndex::getCollection ( ) const
```

Return a shared pointer to the [AstNode](#) serving as the Collection.

##### Returns

The collection into which we will index.

### 5.17.4.5 getIndex()

```
const std::shared_ptr< const AstNode > AstNodeIndex::getIndex ( ) const
```

Return a shared pointer to the [AstNode](#) serving as the Index.

#### Returns

The index expression.

The documentation for this class was generated from the following files:


- [include/astNodeIndex.hpp](#)
- [src/astNodeIndex.cpp](#)

## 5.18 Tang::AstNodeInteger Class Reference


An [AstNode](#) that represents an integer literal.

```
#include <astNodeInteger.hpp>
```

Inheritance diagram for Tang::AstNodeInteger:

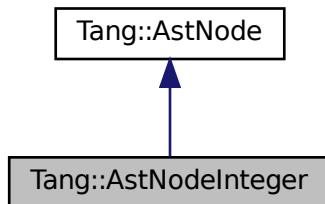

Collaboration diagram for Tang::AstNodeInteger:

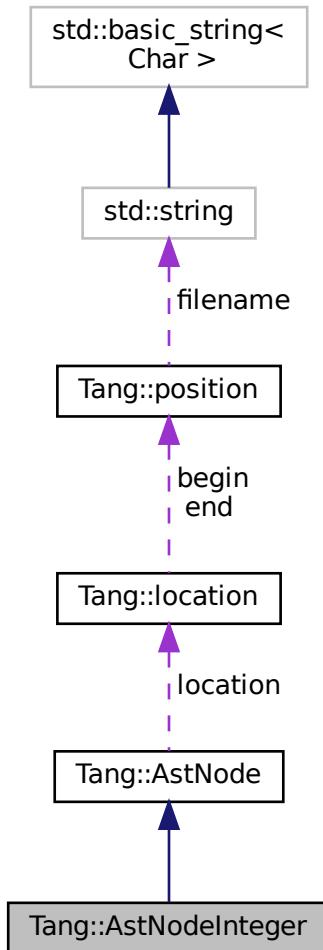

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeInteger (Tang::integer_t number, Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*
- `virtual void compile (Tang::Program &program) const override`  
*Compile the ast of the provided `Tang::Program`.*
- `virtual void compilePreprocess (Program &program, PreprocessState state) const`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- [Tang::location location](#)  
*The location associated with this node.*

## Private Attributes

- [Tang::integer\\_t val](#)  
*The integer value being stored.*

### 5.18.1 Detailed Description

An [AstNode](#) that represents an integer literal.

Integers are represented by the `Tang::integer_t` type, and so are limited in range by that of the underlying type.

### 5.18.2 Member Enumeration Documentation

#### 5.18.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<a href="#">AstNode</a> is part of an assignment expression.

### 5.18.3 Constructor & Destructor Documentation

#### 5.18.3.1 AstNodeInteger()

```
AstNodeInteger::AstNodeInteger (
    Tang::integer_t number,
    Tang::location location )
```

The constructor.

## Parameters

<i>number</i>	The number to represent.
<i>location</i>	The location associated with the expression.

## 5.18.4 Member Function Documentation

### 5.18.4.1 compile()

```
void AstNodeInteger::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

## Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:



### 5.18.4.2 compilePreprocess()

```
void AstNode::compilePreprocess (
    Program & program,
    PreprocessState state ) const [virtual], [inherited]
```

Run any preprocess analysis needed before compilation.

## Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented in [Tang::AstNodeWhile](#), [Tang::AstNodeUse](#), [Tang::AstNodeUnary](#), [Tang::AstNodeTernary](#), [Tang::AstNodeString](#), [Tang::AstNodeSlice](#), [Tang::AstNodeReturn](#), [Tang::AstNodeRangedFor](#), [Tang::AstNodePrint](#), [Tang::AstNodePeriod](#), [Tang::AstNodeMap](#), [Tang::AstNodeLibrary](#), [Tang::AstNodeIndex](#), [Tang::AstNodeIfElse](#), [Tang::AstNodeIdentifier](#), [Tang::AstNodeFunctionDeclaration](#), [Tang::AstNodeFunctionCall](#), [Tang::AstNodeFor](#), [Tang::AstNodeDoWhile](#), [Tang::AstNodeCast](#), [Tang::AstNodeBlock](#), [Tang::AstNodeBinary](#), [Tang::AstNodeAssign](#), and [Tang::AstNodeArray](#).

#### 5.18.4.3 `dump()`

```
string AstNodeInteger::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

##### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

##### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeInteger.hpp](#)
- [src/astNodeInteger.cpp](#)

## 5.19 Tang::AstNodeLibrary Class Reference


An [AstNode](#) that represents an identifier.

```
#include <astNodeLibrary.hpp>
```

Inheritance diagram for Tang::AstNodeLibrary:

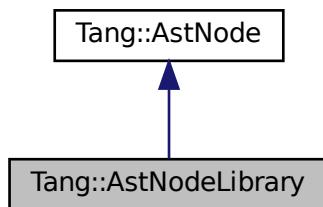

Collaboration diagram for Tang::AstNodeLibrary:

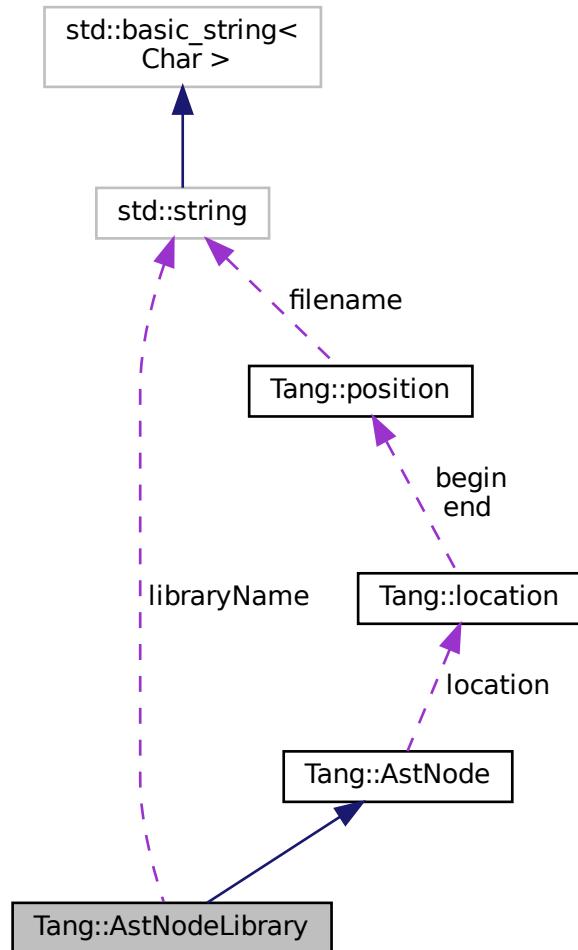

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeLibrary (const std::string &libraryName, Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*
- `virtual void compile (Tang::Program &program) const override`  
*Compile the ast of the provided `Tang::Program`.*
- `virtual void compilePreprocess (Program &program, PreprocessState state) const override`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- std::string `libraryName`  
*The library name.*
- `Tang::location location`  
*The location associated with this node.*

### 5.19.1 Detailed Description

An `AstNode` that represents an identifier.

Library names are represented by a string.

### 5.19.2 Member Enumeration Documentation

#### 5.19.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.19.3 Constructor & Destructor Documentation

#### 5.19.3.1 AstNodeLibrary()

```
AstNodeLibrary::AstNodeLibrary (
    const std::string & libraryName,
    Tang::location location )
```

The constructor.

Parameters

<code>expression</code>	The library expression.
<code>location</code>	The location associated with the expression.

## 5.19.4 Member Function Documentation

### 5.19.4.1 compile()

```
void AstNodeLibrary::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

#### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

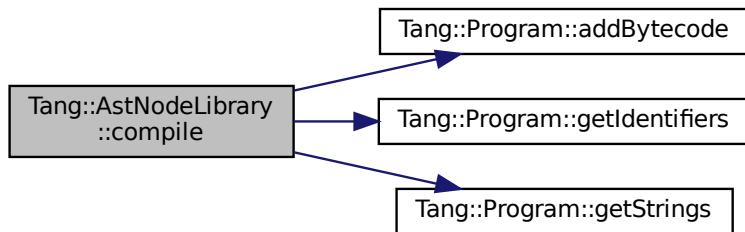

### 5.19.4.2 compilePreprocess()

```
void AstNodeLibrary::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```


Run any preprocess analysis needed before compilation.

#### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:



#### 5.19.4.3 dump()

```
string AstNodeLibrary::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

##### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

##### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeLibrary.hpp](#)
- [src/astNodeLibrary.cpp](#)

## 5.20 Tang::AstNodeMap Class Reference


An [AstNode](#) that represents a map literal.

```
#include <astNodeMap.hpp>
```

Inheritance diagram for Tang::AstNodeMap:

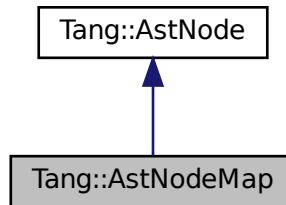

Collaboration diagram for Tang::AstNodeMap:



## Public Types

- enum **PreprocessState** : int { **Default** = 0 , **IsAssignment** = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- AstNodeMap** (std::vector< std::pair< std::string, std::shared\_ptr< Tang::AstNode > >>> **contents**, Tang::location **location**)  
*The constructor.*
- virtual std::string **dump** (std::string **indent**= "") const override  
*Return a string that describes the contents of the node.*
- virtual void **compile** (Tang::Program &**program**) const override  
*Compile the ast of the provided Tang::Program.*
- virtual void **compilePreprocess** (Program &**program**, PreprocessState **state**) const override  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- Tang::location location**  
*The location associated with this node.*

## Private Attributes

- std::vector< std::pair< std::string, std::shared\_ptr< Tang::AstNode > > > **contents**  
*The contents of the array.*

### 5.20.1 Detailed Description

An [AstNode](#) that represents a map literal.

Keys can only be strings.

### 5.20.2 Member Enumeration Documentation

#### 5.20.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<a href="#">AstNode</a> is part of an assignment expression.

### 5.20.3 Constructor & Destructor Documentation

#### 5.20.3.1 AstNodeMap()

```
AstNodeMap::AstNodeMap (
    std::vector< std::pair< std::string, std::shared_ptr< Tang::AstNode >>> contents,
    Tang::location location )
```

The constructor.

Parameters

<i>contents</i>	The contents of the map.
<i>location</i>	The location associated with the expression.

### 5.20.4 Member Function Documentation

#### 5.20.4.1 compile()

```
void AstNodeMap::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

##### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

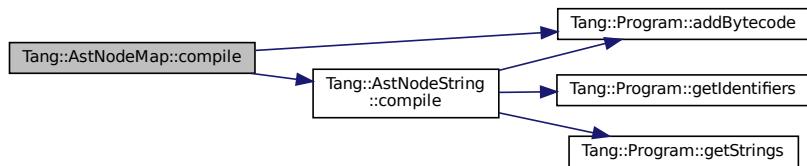

#### 5.20.4.2 compilePreprocess()

```
void AstNodeMap::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

##### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:



### 5.20.4.3 dump()

```
string AstNodeMap::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

#### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

#### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeMap.hpp](#)
- [src/astNodeMap.cpp](#)

## 5.21 Tang::AstNodePeriod Class Reference


An [AstNode](#) that represents a member access (period) into an object.

```
#include <astNodePeriod.hpp>
```

Inheritance diagram for Tang::AstNodePeriod:

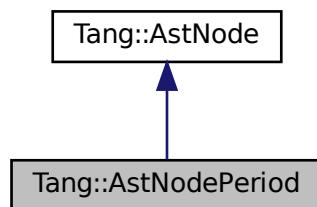

## Collaboration diagram for Tang::AstNodePeriod:

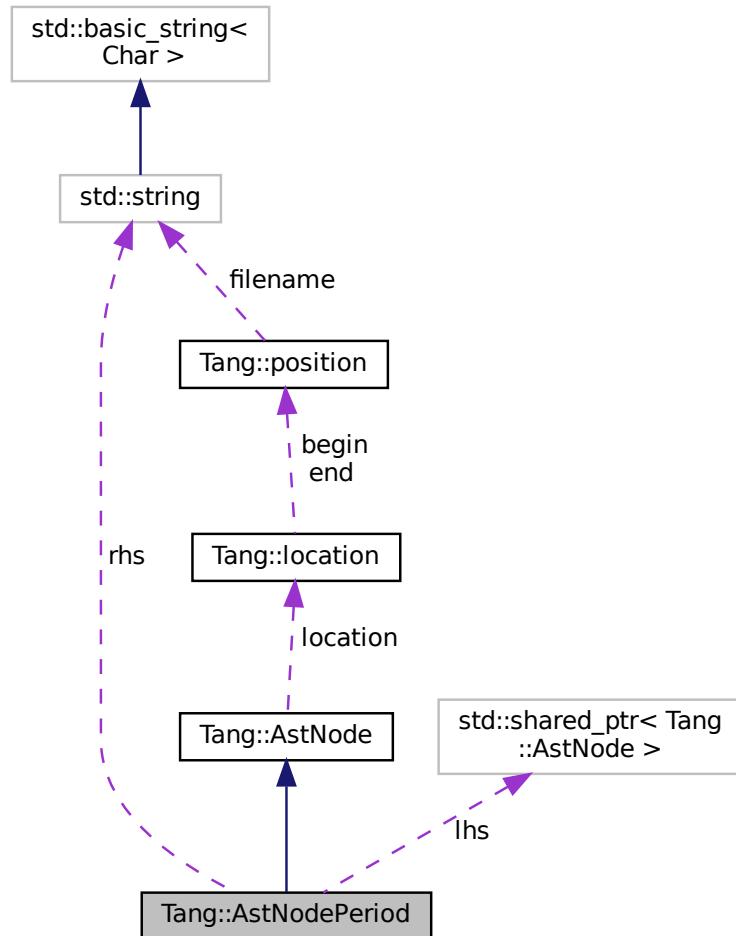

## Public Types

- enum PreprocessState : int { Default = 0 , IsAssignment = 1 }

*Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodePeriod` (`std::shared_ptr< AstNode > lhs, std::string rhs, Tang::location location`)  
*The constructor.*
  - `virtual std::string dump` (`std::string indent=""`) `const override`  
*Return a string that describes the contents of the node.*
  - `virtual void compile` (`Tang::Program &program`) `const override`  
*Compile the ast of the provided `Tang::Program`.*
  - `virtual void compilePreprocess` (`Program &program, PreprocessState state`) `const override`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `std::shared_ptr< AstNode > lhs`  
*The lhs into which we will rhs.*
- `std::string rhs`  
*The rhs expression.*

### 5.21.1 Detailed Description

An `AstNode` that represents a member access (period) into an object.

### 5.21.2 Member Enumeration Documentation

#### 5.21.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

##### Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.21.3 Constructor & Destructor Documentation

#### 5.21.3.1 AstNodePeriod()

```
AstNodePeriod::AstNodePeriod (
    std::shared_ptr< AstNode > lhs,
    std::string rhs,
    Tang::location location )
```

The constructor.

## Parameters

<i>lhs</i>	The lhs on which the member access will be performed
<i>rhs</i>	The rhs identifier.
<i>location</i>	The location associated with the expression.

## 5.21.4 Member Function Documentation

5.21.4.1 `compile()`

```
void AstNodePeriod::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

## Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

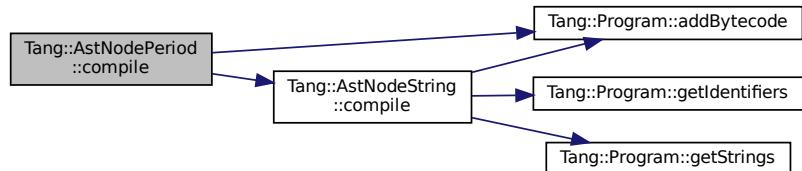5.21.4.2 `compilePreprocess()`

```
void AstNodePeriod::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

## Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:



#### 5.21.4.3 dump()

```
string AstNodePeriod::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

## Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

## Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodePeriod.hpp](#)
- [src/astNodePeriod.cpp](#)

## 5.22 Tang::AstNodePrint Class Reference


An [AstNode](#) that represents a print typeeration.

```
#include <astNodePrint.hpp>
```

Inheritance diagram for Tang::AstNodePrint:

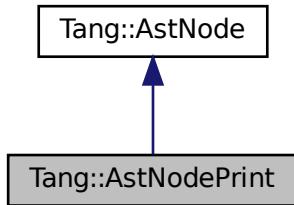

Collaboration diagram for Tang::AstNodePrint:

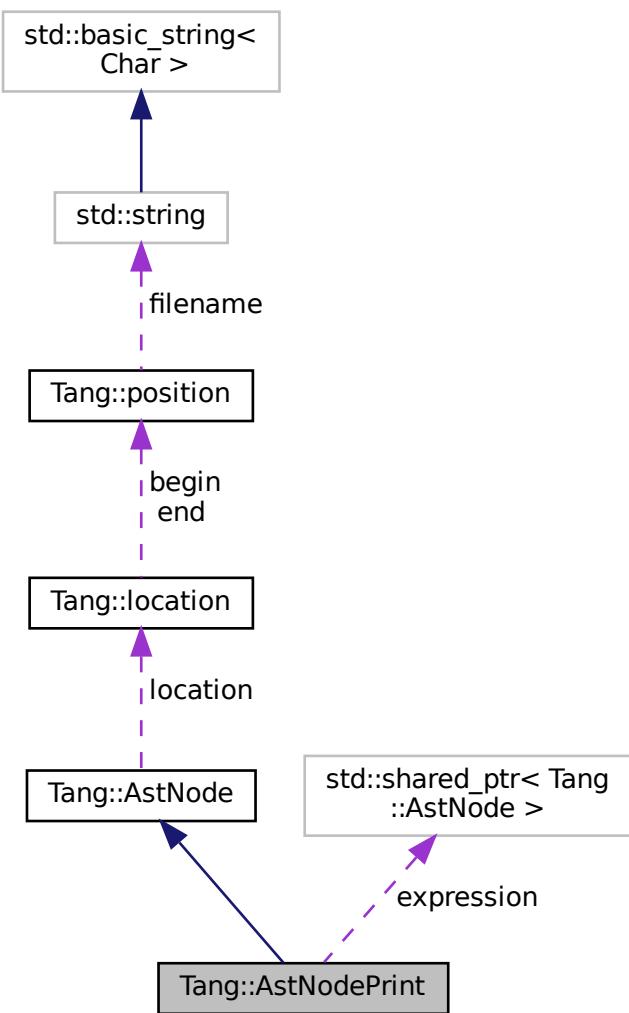

## Public Types

- enum `Type` { `Default` }  
*The type of `print()` requested.*
- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }  
*Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodePrint (Type type, std::shared_ptr< AstNode > expression, Tang::location location)`  
*The constructor.*
- virtual std::string `dump` (std::string `indent`= "") const override  
*Return a string that describes the contents of the node.*
- virtual void `compile` (Tang::Program &program) const override  
*Compile the ast of the provided Tang::Program.*
- virtual void `compilePreprocess` (Program &program, PreprocessState state) const override  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `Type type`  
*The type of `print()` being requested.*
- `std::shared_ptr< AstNode > expression`  
*The expression to be printed.*

### 5.22.1 Detailed Description

An `AstNode` that represents a print typeeration.

### 5.22.2 Member Enumeration Documentation

#### 5.22.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

## Enumerator

Default	The default state.
IsAssignment	<a href="#">AstNode</a> is part of an assignment expression.

**5.22.2.2 Type**

```
enum Tang::AstNodePrint::Type
```

The type of print() requested.

## Enumerator

Default	Use the default print.
---------	------------------------

**5.22.3 Constructor & Destructor Documentation****5.22.3.1 [AstNodePrint\(\)](#)**

```
AstNodePrint::AstNodePrint (
    Type type,
    std::shared_ptr< AstNode > expression,
    Tang::location location )
```

The constructor.

## Parameters

<i>type</i>	The <a href="#">Tang::AstNodePrint::Type</a> being requested.
<i>expression</i>	The expression to be printed.
<i>location</i>	The location associated with the expression.

**5.22.4 Member Function Documentation****5.22.4.1 [compile\(\)](#)**

```
void AstNodePrint::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

## Parameters

<i>program</i>	The <a href="#">Tang::Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:



#### 5.22.4.2 compilePreprocess()

```
void AstNodePrint::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

## Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

#### 5.22.4.3 dump()

```
string AstNodePrint::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

## Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

## Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodePrint.hpp](#)
- [src/astNodePrint.cpp](#)

## 5.23 Tang::AstNodeRangedFor Class Reference


An [AstNode](#) that represents a ranged for() statement.

```
#include <astNodeRangedFor.hpp>
```

Inheritance diagram for Tang::AstNodeRangedFor:

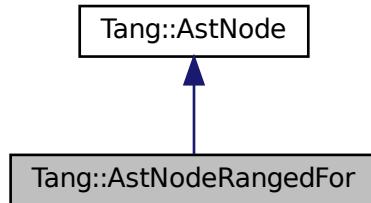

Collaboration diagram for Tang::AstNodeRangedFor:

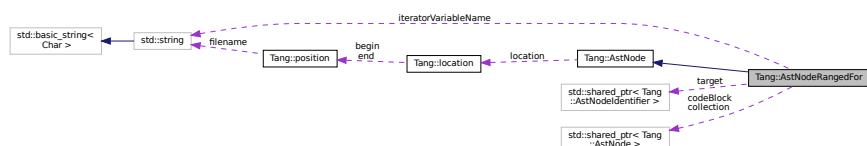

## Public Types

- enum [PreprocessState](#) : int { [Default](#) = 0 , [IsAssignment](#) = 1 }

*Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeRangedFor (std::shared_ptr< AstNodelIdentifier > target, std::shared_ptr< AstNode > collection, std::shared_ptr< AstNode > codeBlock, Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*
- `virtual void compile (Tang::Program &program) const override`  
*Compile the ast of the provided Tang::Program.*
- `virtual void compilePreprocess (Program &program, PreprocessState state) const override`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `std::shared_ptr< AstNodelIdentifier > target`  
*The target variable to hold the value for the current loop iteration.*
- `std::shared_ptr< AstNode > collection`  
*The collection through which to iterate.*
- `std::shared_ptr< AstNode > codeBlock`  
*The code block executed when the condition is true.*
- `std::string iteratorVariableName`  
*The unique variable name that this iterator will use to persist its state on the stack.*

### 5.23.1 Detailed Description

An `AstNode` that represents a ranged for() statement.

### 5.23.2 Member Enumeration Documentation

#### 5.23.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.23.3 Constructor & Destructor Documentation

#### 5.23.3.1 AstNodeRangedFor()

```
AstNodeRangedFor::AstNodeRangedFor (
    std::shared_ptr< AstNodeIdentifier > target,
    std::shared_ptr< AstNode > collection,
    std::shared_ptr< AstNode > codeBlock,
    Tang::location location )
```

The constructor.

##### Parameters

<i>target</i>	The target variable to hold the value for the current loop iteration.
<i>collection</i>	The collection through which to iterate.
<i>codeBlock</i>	The statement executed when the condition is true.
<i>location</i>	The location associated with the expression.

### 5.23.4 Member Function Documentation

#### 5.23.4.1 compile()

```
void AstNodeRangedFor::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

##### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

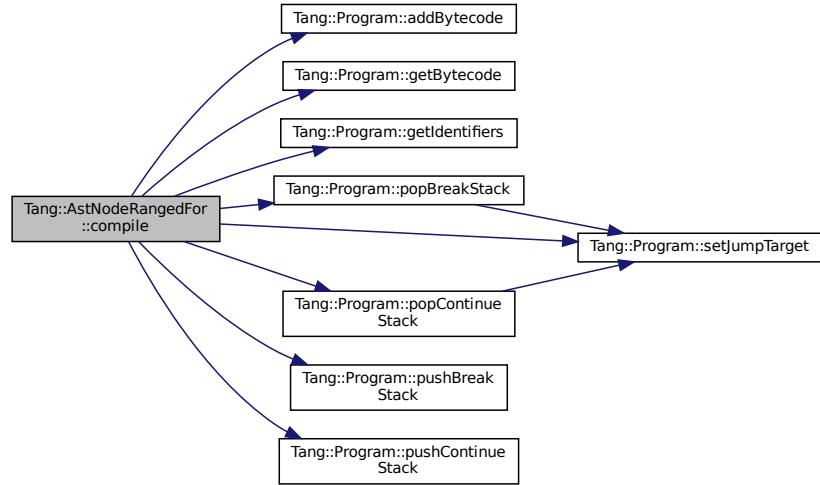

#### 5.23.4.2 compilePreprocess()

```
void AstNodeRangedFor::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```


Run any preprocess analysis needed before compilation.

##### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

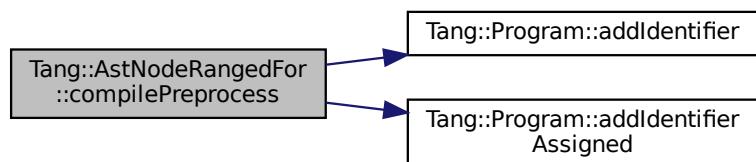

### 5.23.4.3 `dump()`

```
string AstNodeRangedFor::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

#### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

#### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeRangedFor.hpp](#)
- [src/astNodeRangedFor.cpp](#)

## 5.24 Tang::AstNodeReturn Class Reference


An [AstNode](#) that represents a `return` statement.

```
#include <astNodeReturn.hpp>
```

Inheritance diagram for Tang::AstNodeReturn:

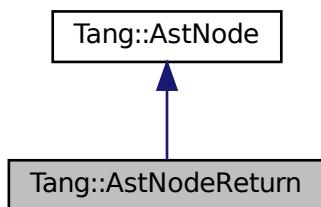

Collaboration diagram for Tang::AstNodeReturn:

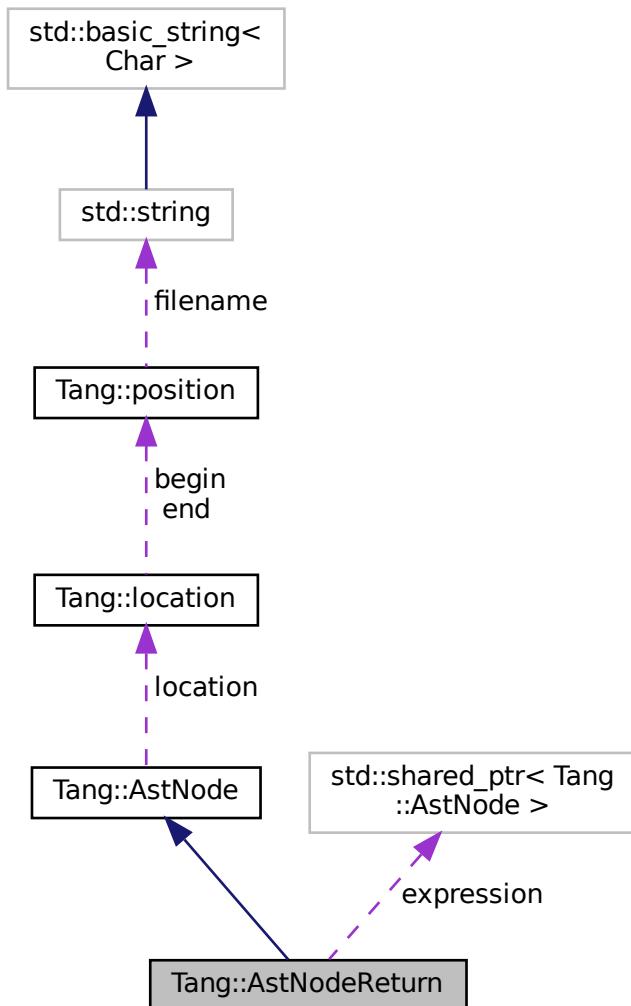

## Public Types

- enum **PreprocessState** : int { **Default** = 0 , **IsAssignment** = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- AstNodeReturn** (`std::shared_ptr<AstNode> expression, Tang::location location)`  
*The constructor.*
- virtual std::string **dump** (`std::string indent = ""`) const override  
*Return a string that describes the contents of the node.*
- virtual void **compile** (`Tang::Program &program`) const override  
*Compile the ast of the provided `Tang::Program`.*
- virtual void **compilePreprocess** (`Program &program, PreprocessState state`) const override  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `std::shared_ptr< AstNode > expression`  
*The expression to which the operation will be applied.*

### 5.24.1 Detailed Description

An `AstNode` that represents a `return` statement.

### 5.24.2 Member Enumeration Documentation

#### 5.24.2.1 PreprocessState

`enum Tang::AstNode::PreprocessState : int [inherited]`

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

##### Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.24.3 Constructor & Destructor Documentation

#### 5.24.3.1 AstNodeReturn()

```
AstNodeReturn::AstNodeReturn (
    std::shared_ptr< AstNode > expression,
    Tang::location location )
```

The constructor.

##### Parameters

<code>expression</code>	The expression to be returned.
<code>location</code>	The location associated with the return statement.

## 5.24.4 Member Function Documentation

### 5.24.4.1 compile()

```
void AstNodeReturn::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

#### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

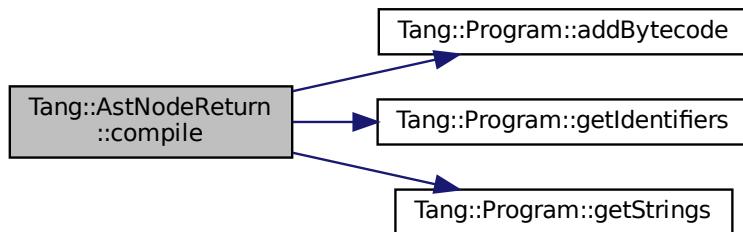

### 5.24.4.2 compilePreprocess()

```
void AstNodeReturn::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

#### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

### 5.24.4.3 `dump()`

```
string AstNodeReturn::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

#### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

#### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeReturn.hpp](#)
- [src/astNodeReturn.cpp](#)

## 5.25 Tang::AstNodeSlice Class Reference


An [AstNode](#) that represents a ternary expression.

```
#include <astNodeSlice.hpp>
```

Inheritance diagram for Tang::AstNodeSlice:

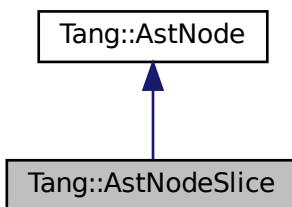

Collaboration diagram for Tang::AstNodeSlice:

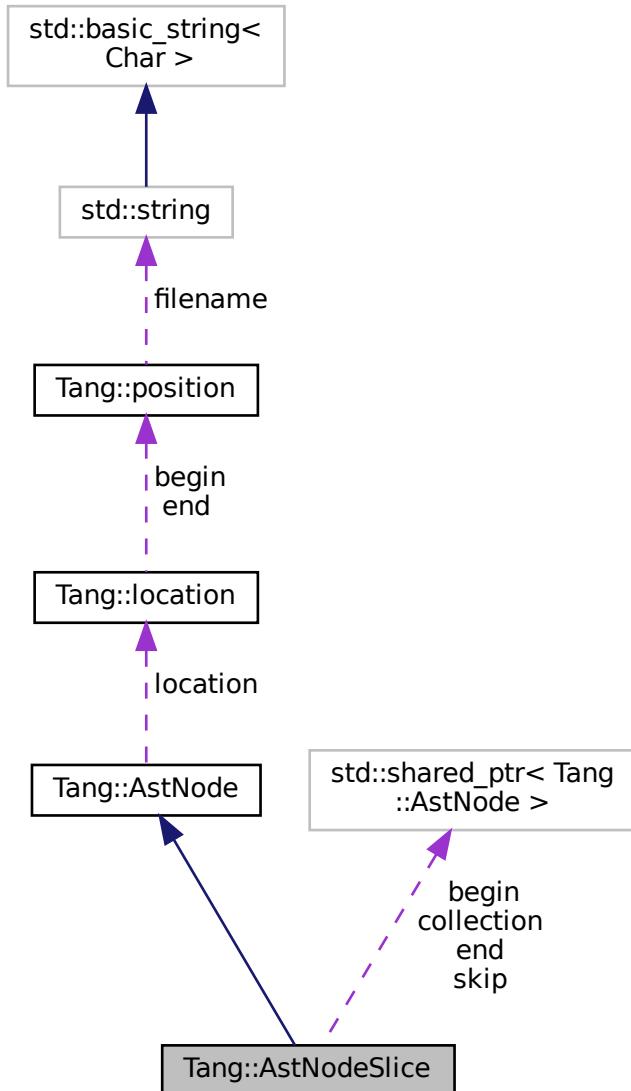

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeSlice (std::shared_ptr< AstNode > collection, std::shared_ptr< AstNode > begin, std::shared_ptr< AstNode > end, std::shared_ptr< AstNode > slice, Tang::location location)`
- The constructor.*

- virtual std::string `dump` (std::string `indent=""`) const override  
*Return a string that describes the contents of the node.*
- virtual void `compile` (`Tang::Program` &`program`) const override  
*Compile the ast of the provided `Tang::Program`.*
- virtual void `compilePreprocess` (`Program` &`program`, `PreprocessState` `state`) const override  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location` `location`  
*The location associated with this node.*

## Private Attributes

- `std::shared_ptr<AstNode>` `collection`  
*The collection which will be sliced.*
- `std::shared_ptr<AstNode>` `begin`  
*The begin index position of the slice.*
- `std::shared_ptr<AstNode>` `end`  
*The end index position of the slice.*
- `std::shared_ptr<AstNode>` `skip`  
*The skip index position of the slice.*

### 5.25.1 Detailed Description

An `AstNode` that represents a ternary expression.

### 5.25.2 Member Enumeration Documentation

#### 5.25.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

##### Enumerator

<code>Default</code>	The default state.
<code>IsAssignment</code>	<code>AstNode</code> is part of an assignment expression.

### 5.25.3 Constructor & Destructor Documentation

#### 5.25.3.1 AstNodeSlice()

```
AstNodeSlice::AstNodeSlice (
    std::shared_ptr< AstNode > collection,
    std::shared_ptr< AstNode > begin,
    std::shared_ptr< AstNode > end,
    std::shared_ptr< AstNode > slice,
    Tang::location location )
```

The constructor.

##### Parameters

<i>collection</i>	The collection which will be sliced.
<i>begin</i>	The begin index position of the slice.
<i>end</i>	The end index position of the slice.
<i>skip</i>	The skip index position of the slice.
<i>location</i>	The location associated with the expression.

### 5.25.4 Member Function Documentation

#### 5.25.4.1 compile()

```
void AstNodeSlice::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

##### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:



#### 5.25.4.2 compilePreprocess()

```
void AstNodeSlice::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

##### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

#### 5.25.4.3 dump()

```
string AstNodeSlice::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

##### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

##### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeSlice.hpp](#)
- [src/astNodeSlice.cpp](#)

## 5.26 Tang::AstNodeString Class Reference


An [AstNode](#) that represents a string literal.

```
#include <astNodeString.hpp>
```

Inheritance diagram for Tang::AstNodeString:

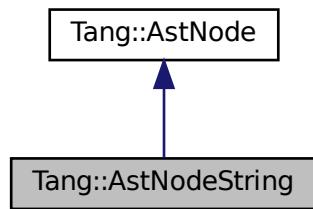

Collaboration diagram for Tang::AstNodeString:

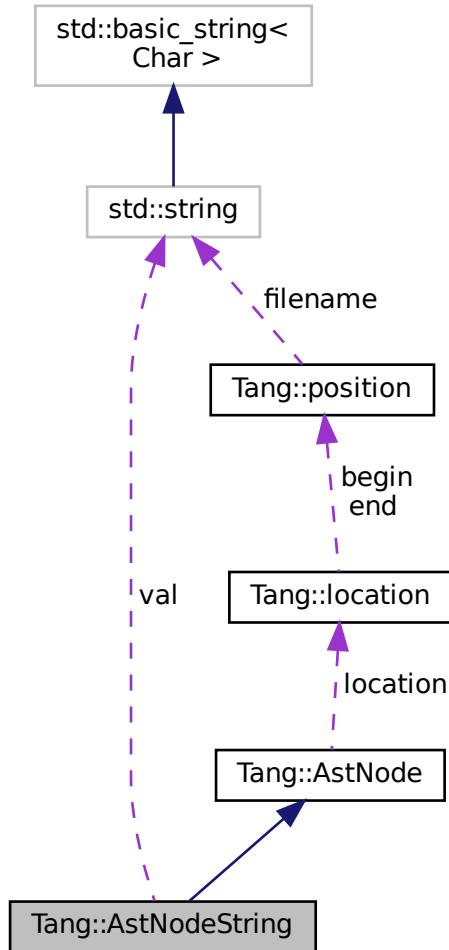

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeString (const std::string &text, Tang::location location)`  
*Construct a Trusted string.*
- `AstNodeString (const std::string &text, UnicodeString::Type type, Tang::location location)`  
*Construct a string that is either Trusted or Untrusted.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*
- `virtual void compile (Tang::Program &program) const override`

*Compile the ast of the provided Tang::Program.*

- virtual void `compilePreprocess` (`Tang::Program` &`program`, `PreprocessState` `state`) const override  
*Run any preprocess analysis needed before compilation.*
- void `compileLiteral` (`Tang::Program` &`program`) const  
*Compile the string and push it onto the stack.*

## Public Attributes

- `Tang::location` `location`  
*The location associated with this node.*

## Private Attributes

- `std::string` `val`  
*The string value being stored.*
- `UnicodeString::Type` `type`  
*The UnicodeString::Type that the string should be considered.*

### 5.26.1 Detailed Description

An `AstNode` that represents a string literal.

### 5.26.2 Member Enumeration Documentation

#### 5.26.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.26.3 Constructor & Destructor Documentation

### 5.26.3.1 `AstNodeString()` [1/2]

```
AstNodeString::AstNodeString (
    const std::string & text,
    Tang::location location )
```

Construct a Trusted string.

#### Parameters

<i>text</i>	The string to represent.
<i>location</i>	The location associated with the expression.

### 5.26.3.2 `AstNodeString()` [2/2]

```
AstNodeString::AstNodeString (
    const std::string & text,
    UnicodeString::Type type,
    Tang::location location )
```

Construct a string that is either Trusted or Untrusted.

#### Parameters

<i>text</i>	The string to represent.
<i>type</i>	The <a href="#">UnicodeString::Type</a> that the string should be considered.
<i>location</i>	The location associated with the expression.

## 5.26.4 Member Function Documentation

### 5.26.4.1 `compile()`

```
void AstNodeString::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

#### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

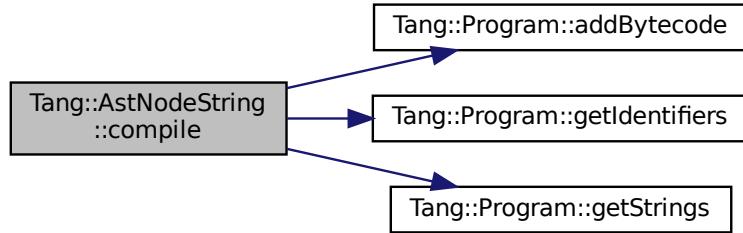

#### 5.26.4.2 compileLiteral()


```
void AstNodeString::compileLiteral (
    Tang::Program & program ) const
```

Compile the string and push it onto the stack.

##### Parameters

<code>program</code>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------------	---

Here is the call graph for this function:



#### 5.26.4.3 compilePreprocess()

```
void AstNodeString::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```


Run any preprocess analysis needed before compilation.

## Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:



#### 5.26.4.4 `dump()`

```
string AstNodeString::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

## Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

## Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeString.hpp](#)
- [src/astNodeString.cpp](#)

## 5.27 Tang::AstNodeTernary Class Reference


An [AstNode](#) that represents a ternary expression.

```
#include <astNodeTernary.hpp>
```

Inheritance diagram for Tang::AstNodeTernary:

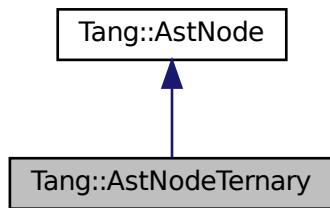

Collaboration diagram for Tang::AstNodeTernary:

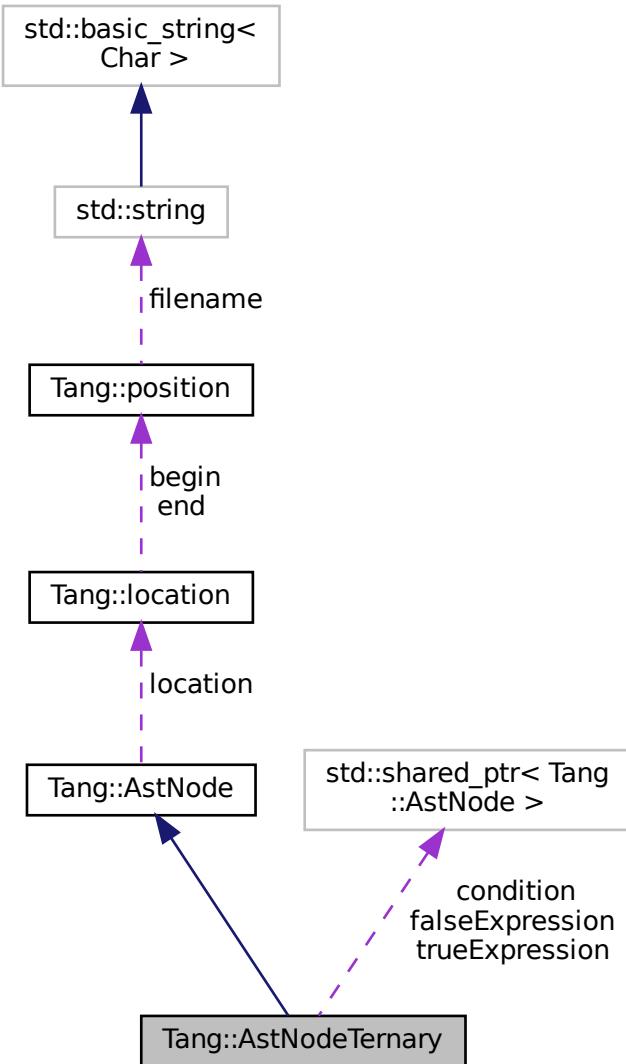

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeTernary (std::shared_ptr< AstNode > condition, std::shared_ptr< AstNode > trueExpression, std::shared_ptr< AstNode > falseExpression, Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`

*Return a string that describes the contents of the node.*

- virtual void `compile (Tang::Program &program)` const override  
*Compile the ast of the provided Tang::Program.*
- virtual void `compilePreprocess (Program &program, PreprocessState state)` const override  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `std::shared_ptr< AstNode > condition`  
*The expression which determines whether the trueExpression or falseExpression is executed.*
- `std::shared_ptr< AstNode > trueExpression`  
*The expression executed when the condition is true.*
- `std::shared_ptr< AstNode > falseExpression`  
*The expression executed when the condition is false.*

### 5.27.1 Detailed Description

An `AstNode` that represents a ternary expression.

### 5.27.2 Member Enumeration Documentation

#### 5.27.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.27.3 Constructor & Destructor Documentation

### 5.27.3.1 AstNodeTernary()

```
AstNodeTernary::AstNodeTernary (
    std::shared_ptr< AstNode > condition,
    std::shared_ptr< AstNode > trueExpression,
    std::shared_ptr< AstNode > falseExpression,
    Tang::location location )
```

The constructor.

#### Parameters

<i>condition</i>	The expression which determines whether the trueExpression or falseExpression is executed.
<i>trueExpression</i>	The expression executed when the condition is true.
<i>falseExpression</i>	The expression executed when the condition is false.
<i>location</i>	The location associated with the expression.

## 5.27.4 Member Function Documentation

### 5.27.4.1 compile()

```
void AstNodeTernary::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

#### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

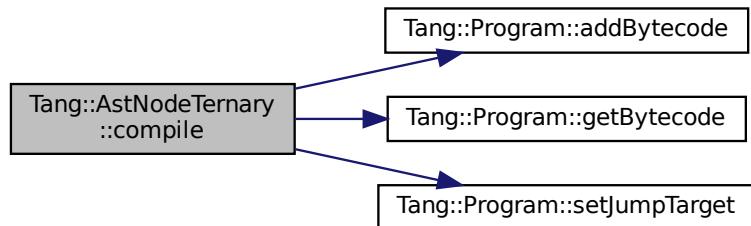

### 5.27.4.2 compilePreprocess()

```
void AstNodeTernary::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

#### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

### 5.27.4.3 dump()

```
string AstNodeTernary::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

#### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

#### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeTernary.hpp](#)
- [src/astNodeTernary.cpp](#)

## 5.28 Tang::AstNodeUnary Class Reference


An [AstNode](#) that represents a unary negation.

```
#include <astNodeUnary.hpp>
```

Inheritance diagram for Tang::AstNodeUnary:

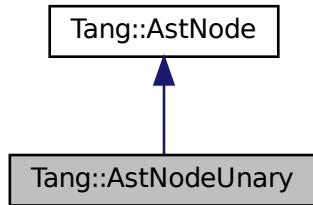

Collaboration diagram for Tang::AstNodeUnary:

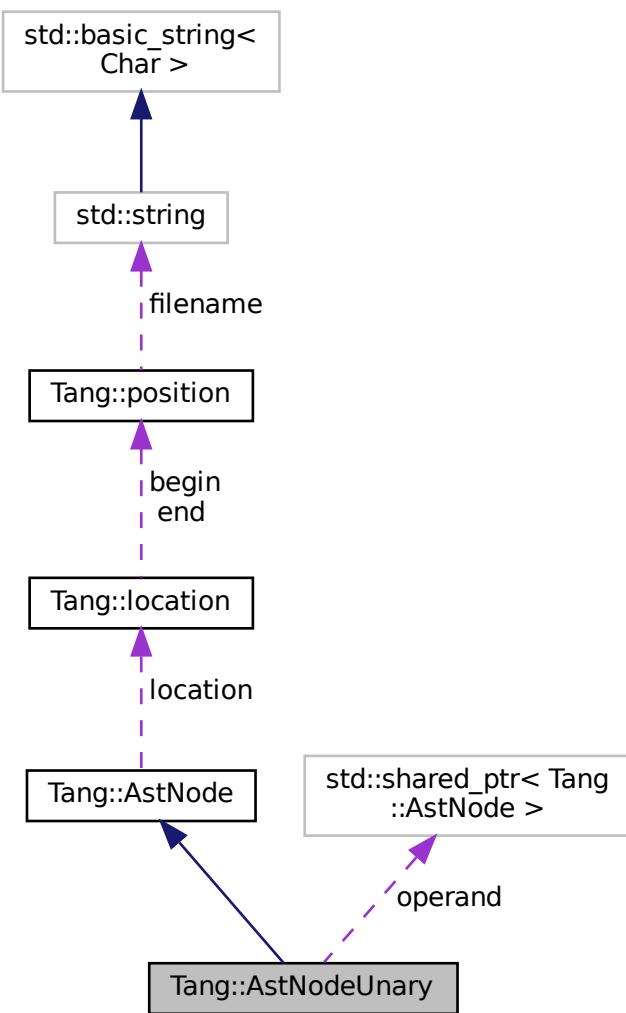

## Public Types

- enum `Operator` { `Negative` , `Not` }  
*The type of operation.*
- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }  
*Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeUnary (Operator op, std::shared_ptr< AstNode > operand, Tang::location location)`  
*The constructor.*
- virtual std::string `dump` (std::string indent="") const override  
*Return a string that describes the contents of the node.*
- virtual void `compile` (Tang::Program &program) const override  
*Compile the ast of the provided Tang::Program.*
- virtual void `compilePreprocess` (Program &program, PreprocessState state) const override  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `Operator op`  
*The operation which will be applied to the operand.*
- `std::shared_ptr< AstNode > operand`  
*The operand to which the operation will be applied.*

### 5.28.1 Detailed Description

An `AstNode` that represents a unary negation.

### 5.28.2 Member Enumeration Documentation

#### 5.28.2.1 Operator

```
enum Tang::AstNodeUnary::Operator
```

The type of operation.

## Enumerator

Negative	Compute the negative (-).
Not	Compute the logical not (!).

**5.28.2.2 PreprocessState**

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

## Enumerator

Default	The default state.
IsAssignment	<a href="#">AstNode</a> is part of an assignment expression.

**5.28.3 Constructor & Destructor Documentation****5.28.3.1 AstNodeUnary()**

```
AstNodeUnary::AstNodeUnary (
    Operator op,
    std::shared_ptr< AstNode > operand,
    Tang::location location )
```

The constructor.

## Parameters

<i>op</i>	The <a href="#">Tang::AstNodeUnary::Operator</a> to apply to the operand.
<i>operand</i>	The expression to be operated on.
<i>location</i>	The location associated with the expression.

**5.28.4 Member Function Documentation****5.28.4.1 compile()**

```
void AstNodeUnary::compile (
    Tang::Program & program ) const [override], [virtual]
```

Compile the ast of the provided [Tang::Program](#).

## Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

#### 5.28.4.2 compilePreprocess()

```
void AstNodeUnary::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

## Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

#### 5.28.4.3 dump()

```
string AstNodeUnary::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

## Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

## Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeUnary.hpp](#)
- [src/astNodeUnary.cpp](#)

## 5.29 Tang::AstNodeUse Class Reference


An [AstNode](#) that represents the inclusion of a library into the script.

```
#include <astNodeUse.hpp>
```

Inheritance diagram for Tang::AstNodeUse:

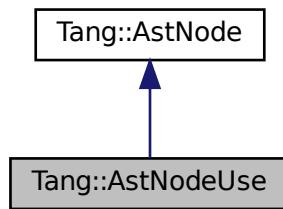

Collaboration diagram for Tang::AstNodeUse:

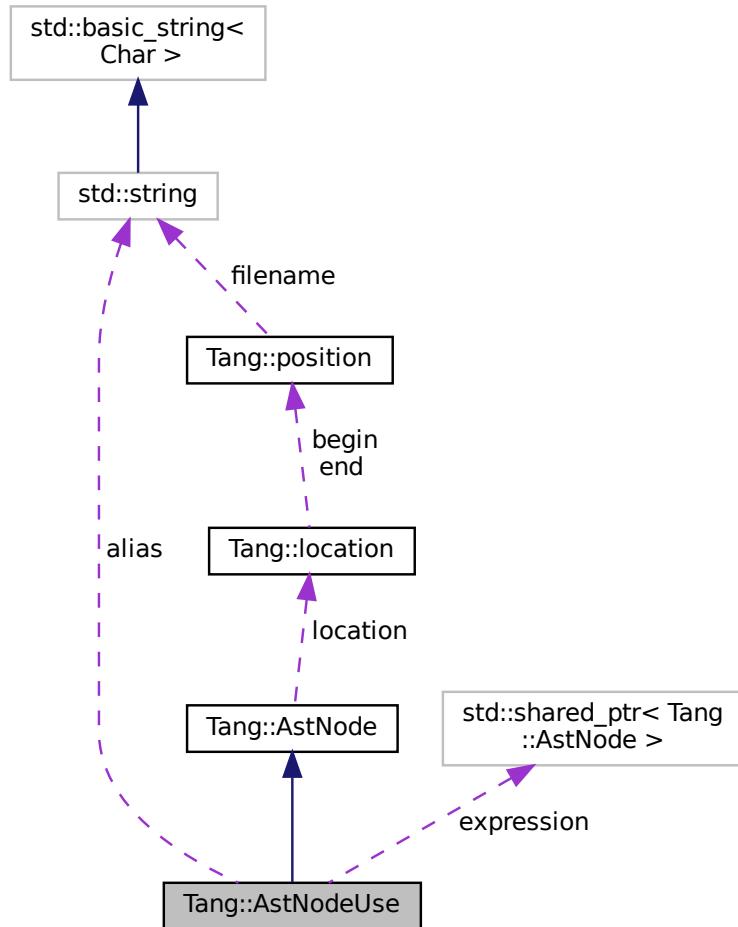

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }
- Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeUse (std::shared_ptr< AstNode > expression, const std::string &alias, Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*
- `virtual void compile (Tang::Program &program) const override`  
*Compile the ast of the provided `Tang::Program`.*
- `virtual void compilePreprocess (Program &program, PreprocessState state) const override`  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- std::string **alias**  
*The alias to use for the library expression.*
- std::shared\_ptr< **AstNode** > **expression**  
*The library expression.*
- **Tang::location location**  
*The location associated with this node.*

### 5.29.1 Detailed Description

An [AstNode](#) that represents the inclusion of a library into the script.

A library or the library attributes will be represented by the `alias` within the script.

### 5.29.2 Member Enumeration Documentation

#### 5.29.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<a href="#">AstNode</a> is part of an assignment expression.

### 5.29.3 Constructor & Destructor Documentation

#### 5.29.3.1 AstNodeUse()

```
AstNodeUse::AstNodeUse (
    std::shared_ptr< AstNode > expression,
    const std::string & alias,
    Tang::location location )
```

The constructor.

Parameters

<code>expression</code>	The library expression.
<code>alias</code>	An alias used to access the library expression within the script.
<code>location</code>	The location associated with the expression.

## 5.29.4 Member Function Documentation

### 5.29.4.1 compile()

```
void AstNodeUse::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

#### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

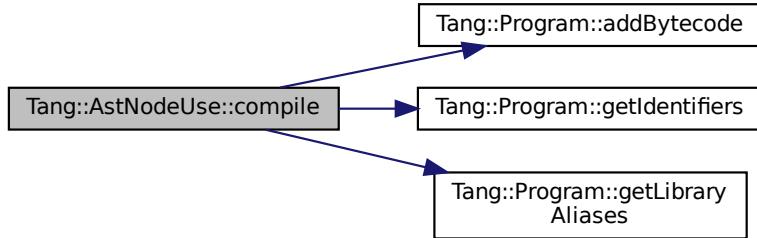

### 5.29.4.2 compilePreprocess()

```
void AstNodeUse::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```


Run any preprocess analysis needed before compilation.

#### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

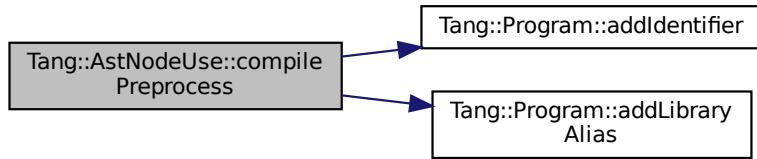

#### 5.29.4.3 `dump()`

```
string AstNodeUse::dump ( std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

##### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

##### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeUse.hpp](#)
- [src/astNodeUse.cpp](#)

## 5.30 Tang::AstNodeWhile Class Reference


An [AstNode](#) that represents a while statement.

```
#include <astNodeWhile.hpp>
```

Inheritance diagram for Tang::AstNodeWhile:

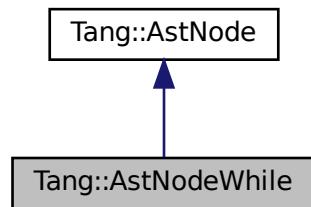

Collaboration diagram for Tang::AstNodeWhile:

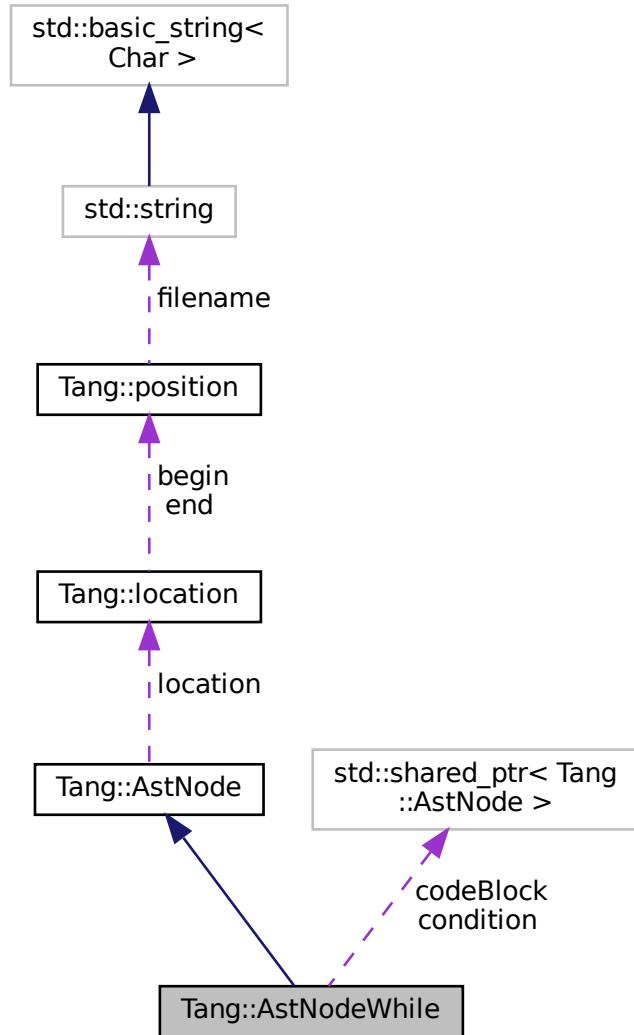

## Public Types

- enum `PreprocessState` : int { `Default` = 0 , `IsAssignment` = 1 }

*Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.*

## Public Member Functions

- `AstNodeWhile (std::shared_ptr< AstNode > condition, std::shared_ptr< AstNode > codeBlock, Tang::location location)`  
*The constructor.*
- `virtual std::string dump (std::string indent="") const override`  
*Return a string that describes the contents of the node.*

- virtual void `compile (Tang::Program &program)` const override  
*Compile the ast of the provided `Tang::Program`.*
- virtual void `compilePreprocess (Program &program, PreprocessState state)` const override  
*Run any preprocess analysis needed before compilation.*

## Public Attributes

- `Tang::location location`  
*The location associated with this node.*

## Private Attributes

- `std::shared_ptr< AstNode > condition`  
*The expression which determines whether or not the code block will continue to be executed.*
- `std::shared_ptr< AstNode > codeBlock`  
*The code block executed when the condition is true.*

### 5.30.1 Detailed Description

An `AstNode` that represents a while statement.

### 5.30.2 Member Enumeration Documentation

#### 5.30.2.1 PreprocessState

```
enum Tang::AstNode::PreprocessState : int [inherited]
```

Bit flags to indicate the state of the preprocess scan as it recursively evaluates the AST.

Enumerator

Default	The default state.
IsAssignment	<code>AstNode</code> is part of an assignment expression.

### 5.30.3 Constructor & Destructor Documentation

#### 5.30.3.1 AstNodeWhile()

```
AstNodeWhile::AstNodeWhile (
    std::shared_ptr< AstNode > condition,
```

```
std::shared_ptr< AstNode > codeBlock,
Tang::location location )
```

The constructor.

#### Parameters

<i>condition</i>	The expression which determines whether the thenBlock or elseBlock is executed.
<i>codeBlock</i>	The statement executed when the condition is true.
<i>location</i>	The location associated with the expression.

### 5.30.4 Member Function Documentation

#### 5.30.4.1 compile()

```
void AstNodeWhile::compile (
    Tang::Program & program ) const [override], [virtual]
```


Compile the ast of the provided [Tang::Program](#).

#### Parameters

<i>program</i>	The <a href="#">Program</a> which will hold the generated Bytecode.
----------------	---

Reimplemented from [Tang::AstNode](#).

Here is the call graph for this function:

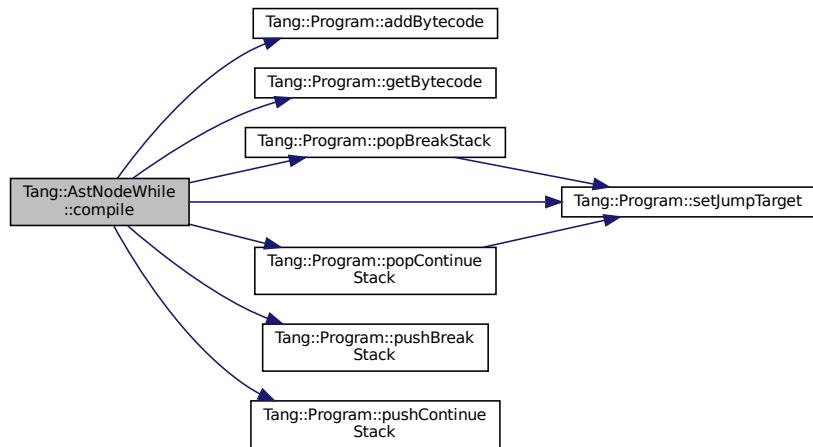

### 5.30.4.2 compilePreprocess()

```
void AstNodeWhile::compilePreprocess (
    Program & program,
    PreprocessState state ) const [override], [virtual]
```

Run any preprocess analysis needed before compilation.

#### Parameters

<i>program</i>	The <a href="#">Tang::Program</a> that is being compiled.
<i>state</i>	Any preprocess flags that need to be considered.

Reimplemented from [Tang::AstNode](#).

### 5.30.4.3 dump()

```
string AstNodeWhile::dump (
    std::string indent = "" ) const [override], [virtual]
```

Return a string that describes the contents of the node.

#### Parameters

<i>indent</i>	A string used to indent the dump.
---------------	-----------------------------------

#### Returns

The value as a string.

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeWhile.hpp](#)
- [src/astNodeWhile.cpp](#)

## 5.31 Tang::ComputedExpression Class Reference

Represents the result of a computation that has been executed.

```
#include <computedExpression.hpp>
```

Inheritance diagram for Tang::ComputedExpression:

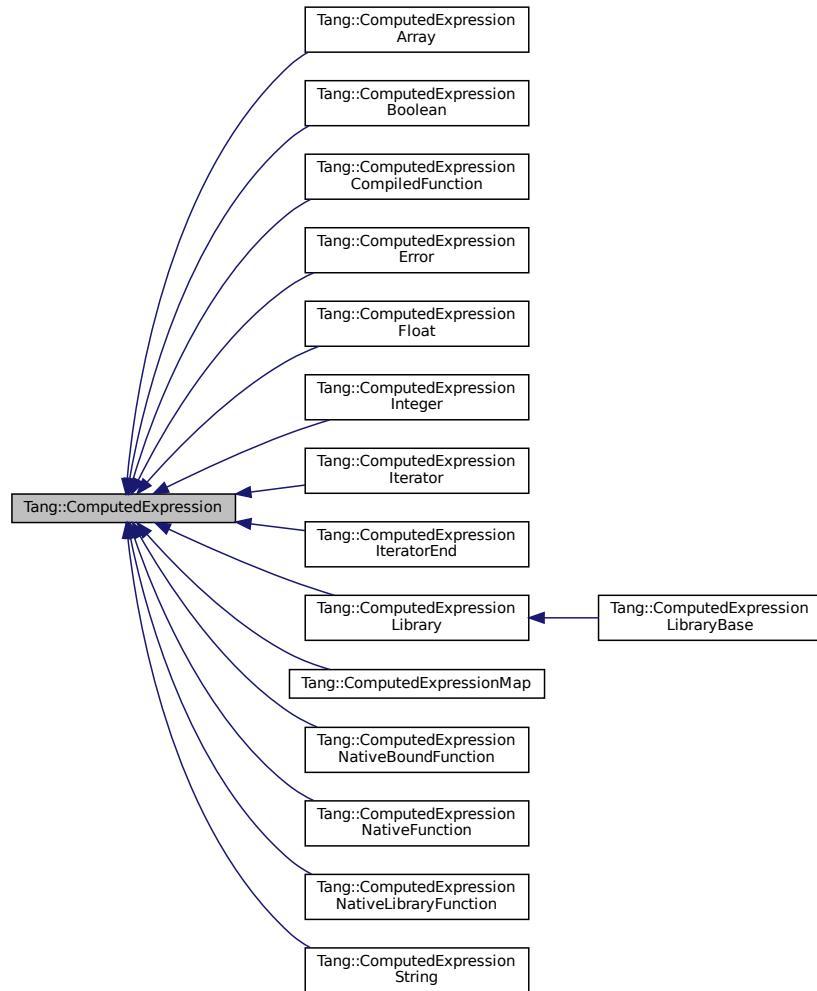

## Public Member Functions

- `virtual ~ComputedExpression ()`  
*The object destructor.*
- `virtual std::string dump () const`  
*Output the contents of the `ComputedExpression` as a string.*
- `virtual std::string __asCode () const`  
*Output the contents of the `ComputedExpression` as a string similar to how it would be represented as code.*
- `virtual bool isCopyNeeded () const`  
*Determine whether or not a copy is needed.*
- `virtual GarbageCollected makeCopy () const`  
*Make a copy of the `ComputedExpression` (recursively, if appropriate).*
- `virtual bool is_equal (const Tang::integer_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const Tang::float_t &val) const`  
*Check whether or not the computed expression is equal to another value.*

- virtual bool `is_equal` (const bool &val) const  
*Check whether or not the computed expression is equal to another value.*
- virtual bool `is_equal` (const std::string &val) const  
*Check whether or not the computed expression is equal to another value.*
- virtual bool `is_equal` (const Error &val) const  
*Check whether or not the computed expression is equal to another value.*
- virtual bool `is_equal` (const std::nullptr\_t &val) const  
*Check whether or not the computed expression is equal to another value.*
- virtual `GarbageCollected __assign_index` (const `GarbageCollected` &index, const `GarbageCollected` &value)  
*Perform an index assignment to the supplied value.*
- virtual `GarbageCollected __add` (const `GarbageCollected` &rhs) const  
*Compute the result of adding this value and the supplied value.*
- virtual `GarbageCollected __subtract` (const `GarbageCollected` &rhs) const  
*Compute the result of subtracting this value and the supplied value.*
- virtual `GarbageCollected __multiply` (const `GarbageCollected` &rhs) const  
*Compute the result of multiplying this value and the supplied value.*
- virtual `GarbageCollected __divide` (const `GarbageCollected` &rhs) const  
*Compute the result of dividing this value and the supplied value.*
- virtual `GarbageCollected __modulo` (const `GarbageCollected` &rhs) const  
*Compute the result of moduloing this value and the supplied value.*
- virtual `GarbageCollected __negative` () const  
*Compute the result of negating this value.*
- virtual `GarbageCollected __not` () const  
*Compute the logical not of this value.*
- virtual `GarbageCollected __lessThan` (const `GarbageCollected` &rhs) const  
*Compute the "less than" comparison.*
- virtual `GarbageCollected __equal` (const `GarbageCollected` &rhs) const  
*Perform an equality test.*
- virtual `GarbageCollected __period` (const `GarbageCollected` &member, std::shared\_ptr<`TangBase`> &tang) const  
*Perform a member access (period) operation.*
- virtual `GarbageCollected __index` (const `GarbageCollected` &index) const  
*Perform an index operation.*
- virtual `GarbageCollected __slice` (const `GarbageCollected` &begin, const `GarbageCollected` &end, const `GarbageCollected` &skip) const  
*Perform a slice operation.*
- virtual `GarbageCollected __getIterator` (const `GarbageCollected` &collection) const  
*Get an iterator for the expression.*
- virtual `GarbageCollected __iteratorNext` (size\_t index=0) const  
*Get the next iterative value.*
- virtual `GarbageCollected __integer` () const  
*Perform a type cast to integer.*
- virtual `GarbageCollected __float` () const  
*Perform a type cast to float.*
- virtual `GarbageCollected __boolean` () const  
*Perform a type cast to boolean.*
- virtual `GarbageCollected __string` () const  
*Perform a type cast to string.*

### 5.31.1 Detailed Description

Represents the result of a computation that has been executed.

By default, it will represent a NULL value.

### 5.31.2 Member Function Documentation

#### 5.31.2.1 \_\_add()

```
GarbageCollected ComputedExpression::__add (
    const GarbageCollected & rhs ) const [virtual]
```

Compute the result of adding this value and the supplied value.

##### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to add to this.
------------	--

##### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

#### 5.31.2.2 \_\_asCode()

```
string ComputedExpression::__asCode ( ) const [virtual]
```

Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.

##### Returns

A code-string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#).

#### 5.31.2.3 \_\_assign\_index()

```
GarbageCollected ComputedExpression::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value ) [virtual]
```

Perform an index assignment to the supplied value.

## Parameters

<i>index</i>	The index to which the value should be applied.
<i>value</i>	The value to store.

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

**5.31.2.4 `__boolean()`**

```
GarbageCollected ComputedExpression::__boolean ( ) const [virtual]
```

Perform a type cast to boolean.

## Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

**5.31.2.5 `__divide()`**

```
GarbageCollected ComputedExpression::__divide (
    const GarbageCollected & rhs ) const [virtual]
```

Compute the result of dividing this value and the supplied value.

## Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to divide this by.
------------	---

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.31.2.6 `__equal()`

```
GarbageCollected ComputedExpression::__equal (
    const GarbageCollected & rhs ) const [virtual]
```

Perform an equality test.

#### Parameters

<i>rhs</i>	The <code>GarbageCollected</code> value to compare against.
------------	---

#### Returns

The result of the the operation.

Reimplemented in `Tang::ComputedExpressionString`, `Tang::ComputedExpressionNativeLibraryFunction`, `Tang::ComputedExpressionTang::ComputedExpressionNativeBoundFunction`, `Tang::ComputedExpressionInteger`, `Tang::ComputedExpressionFloat`, `Tang::ComputedExpressionError`, `Tang::ComputedExpressionCompiledFunction`, and `Tang::ComputedExpressionBoolean`.

### 5.31.2.7 `__float()`

```
GarbageCollected ComputedExpression::__float () const [virtual]
```

Perform a type cast to float.

#### Returns

The result of the the operation.

Reimplemented in `Tang::ComputedExpressionInteger`, `Tang::ComputedExpressionFloat`, `Tang::ComputedExpressionError`, and `Tang::ComputedExpressionBoolean`.

### 5.31.2.8 `__getIterator()`

```
GarbageCollected ComputedExpression::__getIterator (
    const GarbageCollected & collection ) const [virtual]
```

Get an iterator for the expression.

#### Parameters

<i>collection</i>	The <code>GarbageCollected</code> value that will serve as the collection through which to iterate.
-------------------	---

Reimplemented in `Tang::ComputedExpressionString`, `Tang::ComputedExpressionMap`, and `Tang::ComputedExpressionArray`.

### 5.31.2.9 \_\_index()

```
GarbageCollected ComputedExpression::__index (
    const GarbageCollected & index ) const [virtual]
```

Perform an index operation.

#### Parameters

<i>index</i>	The index expression provided by the script.
--------------	--

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.31.2.10 \_\_integer()

```
GarbageCollected ComputedExpression::__integer () const [virtual]
```

Perform a type cast to integer.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.31.2.11 \_\_iteratorNext()

```
GarbageCollected ComputedExpression::__iteratorNext (
    size_t index = 0 ) const [virtual]
```

Get the next iterative value.

#### Parameters

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIterator](#), and [Tang::ComputedExpressionArray](#).

### 5.31.2.12 \_\_lessThan()

```
GarbageCollected ComputedExpression::__lessThan (
    const GarbageCollected & rhs ) const [virtual]
```

Compute the "less than" comparison.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.31.2.13 \_\_modulo()

```
GarbageCollected ComputedExpression::__modulo (
    const GarbageCollected & rhs ) const [virtual]
```

Compute the result of moduloing this value and the supplied value.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to modulo this by.
------------	---

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionError](#).

### 5.31.2.14 \_\_multiply()

```
GarbageCollected ComputedExpression::__multiply (
    const GarbageCollected & rhs ) const [virtual]
```

Compute the result of multiplying this value and the supplied value.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to multiply to this.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.31.2.15 `__negative()`

```
GarbageCollected ComputedExpression::__negative ( ) const [virtual]
```

Compute the result of negating this value.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.31.2.16 `__not()`

```
GarbageCollected ComputedExpression::__not ( ) const [virtual]
```

Compute the logical not of this value.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.31.2.17 `__period()`

```
GarbageCollected ComputedExpression::__period (
    const GarbageCollected & member,
    std::shared_ptr< TangBase > & tang ) const [virtual]
```

Perform a member access (period) operation.

**Parameters**

<i>member</i>	The member expression provided by the script.
---------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionLibrary](#).

**5.31.2.18 \_\_slice()**

```
GarbageCollected ComputedExpression::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [virtual]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

**Parameters**

<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), and [Tang::ComputedExpressionArray](#).

**5.31.2.19 \_\_string()**

```
GarbageCollected ComputedExpression::__string ( ) const [virtual]
```

Perform a type cast to string.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIteratorEnd](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionArray](#).

**5.31.2.20 \_\_subtract()**

```
GarbageCollected ComputedExpression::__subtract (
    const GarbageCollected & rhs ) const [virtual]
```

Compute the result of subtracting this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to subtract from this.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.31.2.21 dump()**

```
string ComputedExpression::dump ( ) const [virtual]
```

Output the contents of the [ComputedExpression](#) as a string.

**Returns**

A string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionNativeLibraryFunction](#), [Tang::ComputedExpressionNativeBoundFunction](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionLibrary](#), [Tang::ComputedExpressionIteratorEnd](#), [Tang::ComputedExpressionIterator](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), [Tang::ComputedExpressionCompiledFunction](#), [Tang::ComputedExpressionBoolean](#), and [Tang::ComputedExpressionArray](#).

**5.31.2.22 is\_equal() [1/6]**

```
virtual bool Tang::ComputedExpression::is_equal ( const bool & val ) const [virtual]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionBoolean](#).

### 5.31.2.23 `is_equal()` [2/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Error & val ) const [virtual]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionError](#).

### 5.31.2.24 `is_equal()` [3/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::nullptr_t & val ) const [virtual]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

#### Returns

True if equal, false if not.

### 5.31.2.25 `is_equal()` [4/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::string & val ) const [virtual]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#).

**5.31.2.26 is\_equal() [5/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::float_t & val ) const [virtual]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.31.2.27 is\_equal() [6/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::integer_t & val ) const [virtual]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.31.2.28 isCopyNeeded()**

```
bool ComputedExpression::isCopyNeeded ( ) const [virtual]
```

Determine whether or not a copy is needed.

Copying is only required for ComputedExpressions which serve as containers, such as [ComputedExpressionArray](#) and [ComputedExpressionObject](#).

**Returns**

Whether or not a copy is needed.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.31.2.29 **makeCopy()**

`GarbageCollected ComputedExpression::makeCopy ( ) const [virtual]`

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

**Returns**

A [Tang::GarbageCollected](#) value for the new [ComputedExpression](#).

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionNativeLibraryFunction](#), [Tang::ComputedExpressionNativeBoundFunction](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionLibraryBase](#), [Tang::ComputedExpressionLibrary](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), [Tang::ComputedExpressionCompiledFunction](#), [Tang::ComputedExpressionBoolean](#), and [Tang::ComputedExpressionArray](#).

The documentation for this class was generated from the following files:


- [include/computedExpression.hpp](#)
- [src/computedExpression.cpp](#)

## 5.32 **Tang::ComputedExpressionArray** Class Reference


Represents an Array that is the result of a computation.

```
#include <computedExpressionArray.hpp>
```

Inheritance diagram for [Tang::ComputedExpressionArray](#):

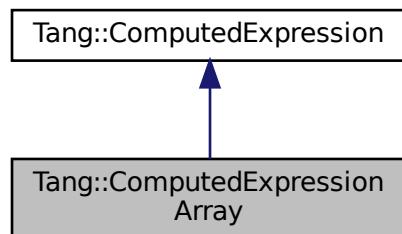

Collaboration diagram for Tang::ComputedExpressionArray:

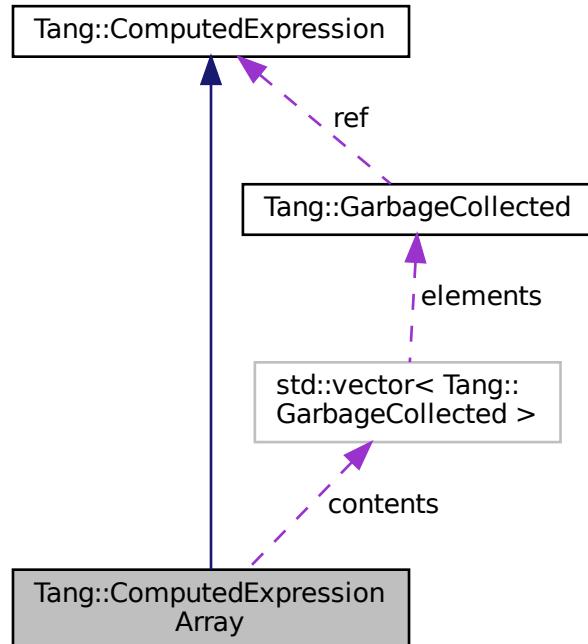

## Public Member Functions

- **ComputedExpressionArray (std::vector< Tang::GarbageCollected > contents)**  
*Construct an Array result.*
- virtual std::string **dump () const override**  
*Output the contents of the [ComputedExpression](#) as a string.*
- virtual bool **isCopyNeeded () const override**  
*Determine whether or not a copy is needed.*
- **GarbageCollected makeCopy () const override**  
*Make a copy of the [ComputedExpression](#) (recursively, if appropriate).*
- virtual **GarbageCollected \_\_index (const GarbageCollected &index) const override**  
*Perform an index operation.*
- virtual **GarbageCollected \_\_slice (const GarbageCollected &begin, const GarbageCollected &end, const GarbageCollected &skip) const override**  
*Perform a slice operation.*
- virtual **GarbageCollected \_\_getIterator (const GarbageCollected &collection) const override**  
*Get an iterator for the expression.*
- virtual **GarbageCollected \_\_iteratorNext (size\_t index) const override**  
*Get the next iterative value.*
- virtual **GarbageCollected \_\_assign\_index (const GarbageCollected &index, const GarbageCollected &value) override**  
*Perform an index assignment to the supplied value.*
- virtual **GarbageCollected \_\_string () const override**

- `const std::vector< Tang::GarbageCollected > & getContents () const`  
*Return the contents of this object.*
- `void append (const Tang::GarbageCollected &item)`  
*Append an item to the contents of this array object.*
- `virtual std::string __asCode () const`  
*Output the contents of the `ComputedExpression` as a string similar to how it would be represented as code.*
- `virtual bool is_equal (const Tang::integer_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const Tang::float_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const bool &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const std::string &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const Error &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const std::nullptr_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual GarbageCollected __add (const GarbageCollected &rhs) const`  
*Compute the result of adding this value and the supplied value.*
- `virtual GarbageCollected __subtract (const GarbageCollected &rhs) const`  
*Compute the result of subtracting this value and the supplied value.*
- `virtual GarbageCollected __multiply (const GarbageCollected &rhs) const`  
*Compute the result of multiplying this value and the supplied value.*
- `virtual GarbageCollected __divide (const GarbageCollected &rhs) const`  
*Compute the result of dividing this value and the supplied value.*
- `virtual GarbageCollected __modulo (const GarbageCollected &rhs) const`  
*Compute the result of moduloing this value and the supplied value.*
- `virtual GarbageCollected __negative () const`  
*Compute the result of negating this value.*
- `virtual GarbageCollected __not () const`  
*Compute the logical not of this value.*
- `virtual GarbageCollected __lessThan (const GarbageCollected &rhs) const`  
*Compute the "less than" comparison.*
- `virtual GarbageCollected __equal (const GarbageCollected &rhs) const`  
*Perform an equality test.*
- `virtual GarbageCollected __period (const GarbageCollected &member, std::shared_ptr< TangBase > &tang) const`  
*Perform a member access (period) operation.*
- `virtual GarbageCollected __integer () const`  
*Perform a type cast to integer.*
- `virtual GarbageCollected __float () const`  
*Perform a type cast to float.*
- `virtual GarbageCollected __boolean () const`  
*Perform a type cast to boolean.*

## Static Public Member Functions

- `static NativeBoundFunctionMap getMethods ()`  
*Return the member functions implemented for this particular expression type.*

## Private Attributes

- `std::vector< Tang::GarbageCollected > contents`  
*The array contents.*

### 5.32.1 Detailed Description

Represents an Array that is the result of a computation.

### 5.32.2 Constructor & Destructor Documentation

#### 5.32.2.1 ComputedExpressionArray()

```
ComputedExpressionArray::ComputedExpressionArray (   
    std::vector< Tang::GarbageCollected > contents )
```

Construct an Array result.

##### Parameters

<code>val</code>	The integer value.
------------------	--------------------

### 5.32.3 Member Function Documentation

#### 5.32.3.1 \_\_add()

```
GarbageCollected ComputedExpression::__add (   
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of adding this value and the supplied value.

##### Parameters

<code>rhs</code>	The <code>GarbageCollected</code> value to add to this.
------------------	---

##### Returns

The result of the operation.

Reimplemented in `Tang::ComputedExpressionString`, `Tang::ComputedExpressionInteger`, `Tang::ComputedExpressionFloat`, and `Tang::ComputedExpressionError`.

### 5.32.3.2 `__asCode()`

```
string ComputedExpression::__asCode ( ) const [virtual], [inherited]
```

Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.

#### Returns

A code-string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.32.3.3 `__assign_index()`

```
GarbageCollected ComputedExpressionArray::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value ) [override], [virtual]
```

Perform an index assignment to the supplied value.

#### Parameters


<i>index</i>	The index to which the value should be applied.
<i>value</i>	The value to store.

#### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

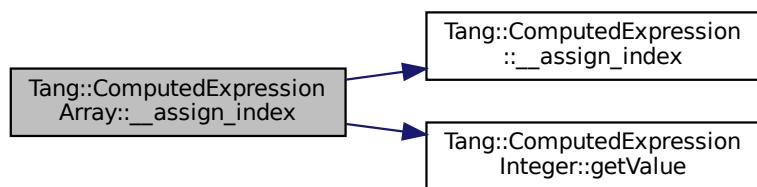

### 5.32.3.4 \_\_boolean()

```
GarbageCollected ComputedExpression::__boolean ( ) const [virtual], [inherited]
```

Perform a type cast to boolean.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.32.3.5 \_\_divide()

```
GarbageCollected ComputedExpression::__divide (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of dividing this value and the supplied value.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to divide this by.
------------	---

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.32.3.6 \_\_equal()

```
GarbageCollected ComputedExpression::__equal (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Perform an equality test.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionNativeLibraryFunction](#), [Tang::ComputedExpressionNativeBoundFunction](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), [Tang::ComputedExpressionCompiledFunction](#), and [Tang::ComputedExpressionBoolean](#).

### 5.32.3.7 `__float()`

`GarbageCollected` `ComputedExpression::__float () const [virtual], [inherited]`

Perform a type cast to float.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.32.3.8 `__getIterator()`

`GarbageCollected` `ComputedExpressionArray::__getIterator (`  
`const GarbageCollected & collection ) const [override], [virtual]`

Get an iterator for the expression.

#### Parameters

<code>collection</code>	The <code>GarbageCollected</code> value that will serve as the collection through which to iterate.
-------------------------	---

Reimplemented from [Tang::ComputedExpression](#).

### 5.32.3.9 `__index()`

`GarbageCollected` `ComputedExpressionArray::__index (`  
`const GarbageCollected & index ) const [override], [virtual]`

Perform an index operation.

#### Parameters


<code>index</code>	The index expression provided by the script.
--------------------	--

**Returns**

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

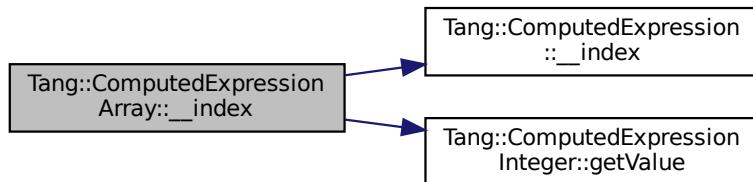**5.32.3.10 \_\_integer()**

[GarbageCollected](#) `ComputedExpression::__integer () const [virtual], [inherited]`

Perform a type cast to integer.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

**5.32.3.11 \_\_iteratorNext()**

[GarbageCollected](#) `ComputedExpressionArray::__iteratorNext ( size_t index ) const [override], [virtual]`

Get the next iterative value.

**Parameters**

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented from [Tang::ComputedExpression](#).

### 5.32.3.12 `__lessThan()`

```
GarbageCollected ComputedExpression::__lessThan (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the "less than" comparison.

#### Parameters

<i>rhs</i>	The <code>GarbageCollected</code> value to compare against.
------------	---

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.32.3.13 `__modulo()`

```
GarbageCollected ComputedExpression::__modulo (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of moduloing this value and the supplied value.

#### Parameters

<i>rhs</i>	The <code>GarbageCollected</code> value to modulo this by.
------------	--

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionError](#).

### 5.32.3.14 `__multiply()`

```
GarbageCollected ComputedExpression::__multiply (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of multiplying this value and the supplied value.

#### Parameters

<i>rhs</i>	The <code>GarbageCollected</code> value to multiply to this.
------------	--

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.32.3.15 `__negative()`

```
GarbageCollected ComputedExpression::__negative ( ) const [virtual], [inherited]
```

Compute the result of negating this value.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.32.3.16 `__not()`

```
GarbageCollected ComputedExpression::__not ( ) const [virtual], [inherited]
```

Compute the logical not of this value.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.32.3.17 `__period()`

```
GarbageCollected ComputedExpression::__period (
    const GarbageCollected & member,
    std::shared_ptr< TangBase > & tang ) const [virtual], [inherited]
```

Perform a member access (period) operation.

**Parameters**

<i>member</i>	The member expression provided by the script.
---------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionLibrary](#).

**5.32.3.18 \_\_slice()**

```
GarbageCollected ComputedExpressionArray::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [override], [virtual]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

**Parameters**


<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

**Returns**

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

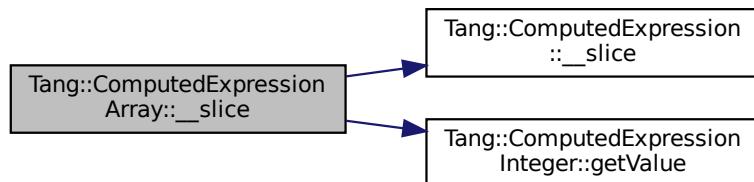

### 5.32.3.19 `__string()`

```
GarbageCollected ComputedExpressionArray::__string ( ) const [override], [virtual]
```


Perform a type cast to string.

#### Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.32.3.20 `__subtract()`

```
GarbageCollected ComputedExpression::__subtract (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of subtracting this value and the supplied value.

#### Parameters

<code>rhs</code>	The <a href="#">GarbageCollected</a> value to subtract from this.
------------------	---

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.32.3.21 `append()`

```
void ComputedExpressionArray::append (
    const Tang::GarbageCollected & item )
```

Append an item to the contents of this array object.

**Parameters**

<i>item</i>	The value to append to the this array.
-------------	--

**5.32.3.22 dump()**

```
string ComputedExpressionArray::dump ( ) const [override], [virtual]
```

Output the contents of the [ComputedExpression](#) as a string.

**Returns**

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

**5.32.3.23 getContents()**

```
const std::vector< Tang::GarbageCollected > & ComputedExpressionArray::getContents ( ) const
```

Return the contents of this object.

**Returns**

The contents of this object.

**5.32.3.24 getMethods()**


```
NativeBoundFunctionMap ComputedExpressionArray::getMethods ( ) [static]
```

Return the member functions implemented for this particular expression type.

**Returns**

The member functions implemented.

Here is the call graph for this function:

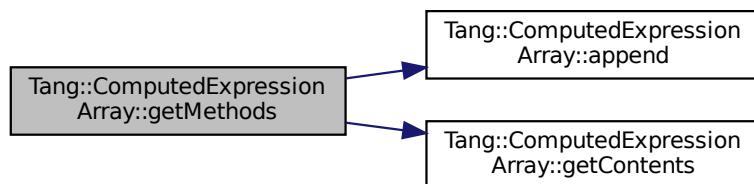

### 5.32.3.25 `is_equal()` [1/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const bool & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionBoolean](#).

### 5.32.3.26 `is_equal()` [2/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Error & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionError](#).

### 5.32.3.27 `is_equal()` [3/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::nullptr_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

**Returns**

True if equal, false if not.

**5.32.3.28 is\_equal() [4/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::string & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#).

**5.32.3.29 is\_equal() [5/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::float_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.32.3.30 is\_equal() [6/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::integer_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.32.3.31 isCopyNeeded()**

```
bool ComputedExpressionArray::isCopyNeeded ( ) const [override], [virtual]
```

Determine whether or not a copy is needed.

Copying is only required for ComputedExpressions which serve as containers, such as [ComputedExpressionArray](#) and [ComputedExpressionObject](#).

**Returns**

Whether or not a copy is needed.

Reimplemented from [Tang::ComputedExpression](#).

**5.32.3.32 makeCopy()**

```
GarbageCollected ComputedExpressionArray::makeCopy ( ) const [override], [virtual]
```

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

**Returns**

A [Tang::GarbageCollected](#) value for the new [ComputedExpression](#).

Reimplemented from [Tang::ComputedExpression](#).

The documentation for this class was generated from the following files:


- [include/computedExpressionArray.hpp](#)
- [src/computedExpressionArray.cpp](#)

## 5.33 Tang::ComputedExpressionBoolean Class Reference


Represents an Boolean that is the result of a computation.

```
#include <computedExpressionBoolean.hpp>
```

Inheritance diagram for Tang::ComputedExpressionBoolean:

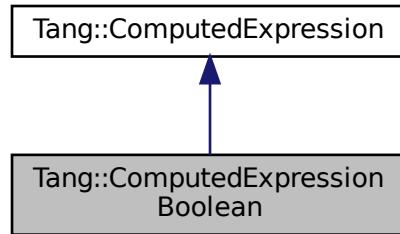

Collaboration diagram for Tang::ComputedExpressionBoolean:

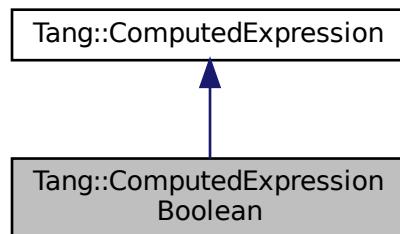

### Public Member Functions

- [ComputedExpressionBoolean \(bool val\)](#)  
*Construct an Boolean result.*
- virtual std::string [dump \(\) const override](#)  
*Output the contents of the [ComputedExpression](#) as a string.*
- [GarbageCollected makeCopy \(\) const override](#)  
*Make a copy of the [ComputedExpression](#) (recursively, if appropriate).*
- virtual bool [is\\_equal \(const bool &val\) const override](#)  
*Check whether or not the computed expression is equal to another value.*
- virtual [GarbageCollected \\_\\_not \(\) const override](#)  
*Compute the logical not of this value.*

- virtual `GarbageCollected __equal` (const `GarbageCollected &rhs`) const override  
*Perform an equality test.*
- virtual `GarbageCollected __integer` () const override  
*Perform a type cast to integer.*
- virtual `GarbageCollected __float` () const override  
*Perform a type cast to float.*
- virtual `GarbageCollected __boolean` () const override  
*Perform a type cast to boolean.*
- virtual `std::string __asCode` () const  
*Output the contents of the `ComputedExpression` as a string similar to how it would be represented as code.*
- virtual `bool isCopyNeeded` () const  
*Determine whether or not a copy is needed.*
- virtual `bool is_equal` (const `Tang::integer_t &val`) const  
*Check whether or not the computed expression is equal to another value.*
- virtual `bool is_equal` (const `Tang::float_t &val`) const  
*Check whether or not the computed expression is equal to another value.*
- virtual `bool is_equal` (const `std::string &val`) const  
*Check whether or not the computed expression is equal to another value.*
- virtual `bool is_equal` (const `Error &val`) const  
*Check whether or not the computed expression is equal to another value.*
- virtual `bool is_equal` (const `std::nullptr_t &val`) const  
*Check whether or not the computed expression is equal to another value.*
- virtual `GarbageCollected __assign_index` (const `GarbageCollected &index`, const `GarbageCollected &value`)  
*Perform an index assignment to the supplied value.*
- virtual `GarbageCollected __add` (const `GarbageCollected &rhs`) const  
*Compute the result of adding this value and the supplied value.*
- virtual `GarbageCollected __subtract` (const `GarbageCollected &rhs`) const  
*Compute the result of subtracting this value and the supplied value.*
- virtual `GarbageCollected __multiply` (const `GarbageCollected &rhs`) const  
*Compute the result of multiplying this value and the supplied value.*
- virtual `GarbageCollected __divide` (const `GarbageCollected &rhs`) const  
*Compute the result of dividing this value and the supplied value.*
- virtual `GarbageCollected __modulo` (const `GarbageCollected &rhs`) const  
*Compute the result of moduloing this value and the supplied value.*
- virtual `GarbageCollected __negative` () const  
*Compute the result of negating this value.*
- virtual `GarbageCollected __lessThan` (const `GarbageCollected &rhs`) const  
*Compute the "less than" comparison.*
- virtual `GarbageCollected __period` (const `GarbageCollected &member`, `std::shared_ptr<TangBase> &tang`) const  
*Perform a member access (period) operation.*
- virtual `GarbageCollected __index` (const `GarbageCollected &index`) const  
*Perform an index operation.*
- virtual `GarbageCollected __slice` (const `GarbageCollected &begin`, const `GarbageCollected &end`, const `GarbageCollected &skip`) const  
*Perform a slice operation.*
- virtual `GarbageCollected __getIterator` (const `GarbageCollected &collection`) const  
*Get an iterator for the expression.*
- virtual `GarbageCollected __iteratorNext` (`size_t index=0`) const  
*Get the next iterative value.*
- virtual `GarbageCollected __string` () const  
*Perform a type cast to string.*

## Private Attributes

- bool `val`  
*The boolean value.*

### 5.33.1 Detailed Description

Represents an Boolean that is the result of a computation.

### 5.33.2 Constructor & Destructor Documentation

#### 5.33.2.1 ComputedExpressionBoolean()

```
ComputedExpressionBoolean::ComputedExpressionBoolean (   
    bool val )
```

Construct an Boolean result.

##### Parameters

<code>val</code>	The boolean value.
------------------	--------------------

### 5.33.3 Member Function Documentation

#### 5.33.3.1 \_\_add()

```
GarbageCollected ComputedExpression::__add (   
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of adding this value and the supplied value.

##### Parameters

<code>rhs</code>	The <code>GarbageCollected</code> value to add to this.
------------------	---

##### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.33.3.2 `__asCode()`

```
string ComputedExpression::__asCode ( ) const [virtual], [inherited]
```

Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.

#### Returns

A code-string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.33.3.3 `__assign_index()`

```
GarbageCollected ComputedExpression::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value ) [virtual], [inherited]
```

Perform an index assignment to the supplied value.

#### Parameters

<i>index</i>	The index to which the value should be applied.
<i>value</i>	The value to store.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.33.3.4 `__boolean()`

```
GarbageCollected ComputedExpressionBoolean::__boolean ( ) const [override], [virtual]
```

Perform a type cast to boolean.

#### Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.33.3.5 `__divide()`

```
GarbageCollected ComputedExpression::__divide (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of dividing this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to divide this by.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.33.3.6 [\\_\\_equal\(\)](#)**

```
GarbageCollected ComputedExpressionBoolean::__equal (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Perform an equality test.

**Parameters**


<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

**5.33.3.7 [\\_\\_float\(\)](#)**

```
GarbageCollected ComputedExpressionBoolean::__float ( ) const [override], [virtual]
```

Perform a type cast to float.

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.33.3.8 `__getIterator()`

```
GarbageCollected ComputedExpression::__getIterator (
    const GarbageCollected & collection ) const [virtual], [inherited]
```

Get an iterator for the expression.

#### Parameters

<i>collection</i>	The <code>GarbageCollected</code> value that will serve as the collection through which to iterate.
-------------------	---

Reimplemented in `Tang::ComputedExpressionString`, `Tang::ComputedExpressionMap`, and `Tang::ComputedExpressionArray`.

### 5.33.3.9 `__index()`

```
GarbageCollected ComputedExpression::__index (
    const GarbageCollected & index ) const [virtual], [inherited]
```

Perform an index operation.

#### Parameters

<i>index</i>	The index expression provided by the script.
--------------	--

#### Returns

The result of the operation.

Reimplemented in `Tang::ComputedExpressionString`, `Tang::ComputedExpressionMap`, and `Tang::ComputedExpressionArray`.

### 5.33.3.10 `__integer()`

```
GarbageCollected ComputedExpressionBoolean::__integer ( ) const [override], [virtual]
```

Perform a type cast to integer.

#### Returns

The result of the the operation.

Reimplemented from `Tang::ComputedExpression`.

### 5.33.3.11 `__iteratorNext()`

```
GarbageCollected ComputedExpression::__iteratorNext (
    size_t index = 0 ) const [virtual], [inherited]
```

Get the next iterative value.

## Parameters

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIterator](#), and [Tang::ComputedExpressionArray](#).

### 5.33.3.12 `__lessThan()`

```
GarbageCollected ComputedExpression::__lessThan (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the "less than" comparison.

## Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

## Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.33.3.13 `__modulo()`

```
GarbageCollected ComputedExpression::__modulo (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of moduloing this value and the supplied value.

## Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to modulo this by.
------------	---

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionError](#).

### 5.33.3.14 `__multiply()`

```
GarbageCollected ComputedExpression::__multiply (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of multiplying this value and the supplied value.

#### Parameters

<code>rhs</code>	The <code>GarbageCollected</code> value to multiply to this.
------------------	--

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.33.3.15 `__negative()`

```
GarbageCollected ComputedExpression::__negative ( ) const [virtual], [inherited]
```

Compute the result of negating this value.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.33.3.16 `__not()`

```
GarbageCollected ComputedExpressionBoolean::__not ( ) const [override], [virtual]
```

Compute the logical not of this value.

#### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.33.3.17 `__period()`

```
GarbageCollected ComputedExpression::__period (
    const GarbageCollected & member,
    std::shared_ptr< TangBase > & tang ) const [virtual], [inherited]
```

Perform a member access (period) operation.

## Parameters

<i>member</i>	The member expression provided by the script.
---------------	---

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionLibrary](#).

**5.33.3.18 \_\_slice()**

```
GarbageCollected ComputedExpression::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [virtual], [inherited]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

## Parameters

<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), and [Tang::ComputedExpressionArray](#).

**5.33.3.19 \_\_string()**

```
GarbageCollected ComputedExpression::__string ( ) const [virtual], [inherited]
```

Perform a type cast to string.

## Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIteratorEnd](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionArray](#).

### 5.33.3.20 `__subtract()`

```
GarbageCollected ComputedExpression::__subtract (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of subtracting this value and the supplied value.

#### Parameters

<i>rhs</i>	The <code>GarbageCollected</code> value to subtract from this.
------------	--

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.33.3.21 `dump()`

```
string ComputedExpressionBoolean::dump ( ) const [override], [virtual]
```

Output the contents of the `ComputedExpression` as a string.

#### Returns

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

### 5.33.3.22 `is_equal()` [1/6]

```
bool ComputedExpressionBoolean::is_equal (
    const bool & val ) const [override], [virtual]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented from [Tang::ComputedExpression](#).

### 5.33.3.23 `is_equal()` [2/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Error & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionError](#).

### 5.33.3.24 `is_equal()` [3/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::nullptr_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

#### Returns

True if equal, false if not.

### 5.33.3.25 `is_equal()` [4/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::string & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#).

**5.33.3.26 is\_equal() [5/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::float_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.33.3.27 is\_equal() [6/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::integer_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.33.3.28 isCopyNeeded()**

```
bool ComputedExpression::isCopyNeeded ( ) const [virtual], [inherited]
```

Determine whether or not a copy is needed.

Copying is only required for ComputedExpressions which serve as containers, such as [ComputedExpressionArray](#) and [ComputedExpressionObject](#).

#### Returns

Whether or not a copy is needed.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

#### 5.33.3.29 makeCopy()

`GarbageCollected` [ComputedExpressionBoolean::makeCopy](#) ( ) const [override], [virtual]

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

#### Returns

A [Tang::GarbageCollected](#) value for the new [ComputedExpression](#).

Reimplemented from [Tang::ComputedExpression](#).

The documentation for this class was generated from the following files:


- [include/computedExpressionBoolean.hpp](#)
- [src/computedExpressionBoolean.cpp](#)

## 5.34 Tang::ComputedExpressionCompiledFunction Class Reference


Represents a Compiled Function declared in the script.

```
#include <computedExpressionCompiledFunction.hpp>
```

Inheritance diagram for Tang::ComputedExpressionCompiledFunction:

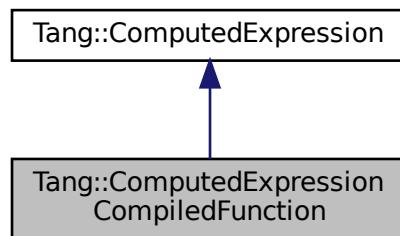

Collaboration diagram for Tang::ComputedExpressionCompiledFunction:

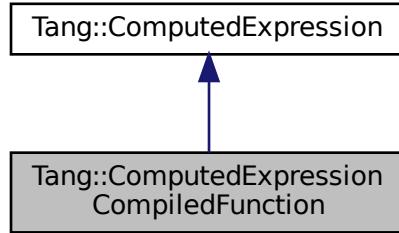

## Public Member Functions

- **ComputedExpressionCompiledFunction** (uint32\_t argc, Tang::integer\_t pc)  
*Construct an CompiledFunction.*
- virtual std::string **dump** () const override  
*Output the contents of the [ComputedExpression](#) as a string.*
- **GarbageCollected makeCopy** () const override  
*Make a copy of the [ComputedExpression](#) (recursively, if appropriate).*
- virtual **GarbageCollected \_\_equal** (const [GarbageCollected](#) &rhs) const override  
*Perform an equality test.*
- uint32\_t **getArgc** () const  
*Get the argc value.*
- Tang::integer\_t **getPc** () const  
*Get the bytecode target.*
- virtual std::string **\_\_asCode** () const  
*Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.*
- virtual bool **isCopyNeeded** () const  
*Determine whether or not a copy is needed.*
- virtual bool **is\_equal** (const Tang::integer\_t &val) const  
*Check whether or not the computed expression is equal to another value.*
- virtual bool **is\_equal** (const Tang::float\_t &val) const  
*Check whether or not the computed expression is equal to another value.*
- virtual bool **is\_equal** (const bool &val) const  
*Check whether or not the computed expression is equal to another value.*
- virtual bool **is\_equal** (const std::string &val) const  
*Check whether or not the computed expression is equal to another value.*
- virtual bool **is\_equal** (const [Error](#) &val) const  
*Check whether or not the computed expression is equal to another value.*
- virtual bool **is\_equal** (const std::nullptr\_t &val) const  
*Check whether or not the computed expression is equal to another value.*
- virtual **GarbageCollected \_\_assign\_index** (const [GarbageCollected](#) &index, const [GarbageCollected](#) &value)  
*Perform an index assignment to the supplied value.*
- virtual **GarbageCollected \_\_add** (const [GarbageCollected](#) &rhs) const  
*Compute the result of adding this value and the supplied value.*

- virtual `GarbageCollected __subtract` (const `GarbageCollected` &rhs) const  
*Compute the result of subtracting this value and the supplied value.*
- virtual `GarbageCollected __multiply` (const `GarbageCollected` &rhs) const  
*Compute the result of multiplying this value and the supplied value.*
- virtual `GarbageCollected __divide` (const `GarbageCollected` &rhs) const  
*Compute the result of dividing this value and the supplied value.*
- virtual `GarbageCollected __modulo` (const `GarbageCollected` &rhs) const  
*Compute the result of moduloing this value and the supplied value.*
- virtual `GarbageCollected __negative` () const  
*Compute the result of negating this value.*
- virtual `GarbageCollected __not` () const  
*Compute the logical not of this value.*
- virtual `GarbageCollected __lessThan` (const `GarbageCollected` &rhs) const  
*Compute the "less than" comparison.*
- virtual `GarbageCollected __period` (const `GarbageCollected` &member, std::shared\_ptr<`TangBase`> &tang) const  
*Perform a member access (period) operation.*
- virtual `GarbageCollected __index` (const `GarbageCollected` &index) const  
*Perform an index operation.*
- virtual `GarbageCollected __slice` (const `GarbageCollected` &begin, const `GarbageCollected` &end, const `GarbageCollected` &skip) const  
*Perform a slice operation.*
- virtual `GarbageCollected __getIterator` (const `GarbageCollected` &collection) const  
*Get an iterator for the expression.*
- virtual `GarbageCollected __iteratorNext` (size\_t index=0) const  
*Get the next iterative value.*
- virtual `GarbageCollected __integer` () const  
*Perform a type cast to integer.*
- virtual `GarbageCollected __float` () const  
*Perform a type cast to float.*
- virtual `GarbageCollected __boolean` () const  
*Perform a type cast to boolean.*
- virtual `GarbageCollected __string` () const  
*Perform a type cast to string.*

## Private Attributes

- `uint32_t argc`  
*The count of arguments that this function expects.*
- `Tang::integer_t pc`  
*The bytecode address of the start of the function.*

### 5.34.1 Detailed Description

Represents a Compiled Function declared in the script.

### 5.34.2 Constructor & Destructor Documentation

### 5.34.2.1 ComputedExpressionCompiledFunction()

```
ComputedExpressionCompiledFunction::ComputedExpressionCompiledFunction (
    uint32_t argc,
    Tang::integer_t pc )
```

Construct an CompiledFunction.

#### Parameters

<i>argc</i>	The count of arguments that this function expects.
<i>pc</i>	The bytecode address of the start of the function.

## 5.34.3 Member Function Documentation

### 5.34.3.1 \_\_add()

```
GarbageCollected ComputedExpression::__add (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of adding this value and the supplied value.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to add to this.
------------	--

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.34.3.2 \_\_asCode()

```
string ComputedExpression::__asCode ( ) const [virtual], [inherited]
```

Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.

#### Returns

A code-string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.34.3.3 `__assign_index()`

```
GarbageCollected ComputedExpression::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value )  [virtual], [inherited]
```

Perform an index assignment to the supplied value.

#### Parameters

<i>index</i>	The index to which the value should be applied.
<i>value</i>	The value to store.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.34.3.4 `__boolean()`

```
GarbageCollected ComputedExpression::__boolean () const [virtual], [inherited]
```

Perform a type cast to boolean.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.34.3.5 `__divide()`

```
GarbageCollected ComputedExpression::__divide (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of dividing this value and the supplied value.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to divide this by.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.34.3.6 \_\_equal()**

```
GarbageCollected ComputedExpressionCompiledFunction::__equal (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Perform an equality test.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

**5.34.3.7 \_\_float()**

```
GarbageCollected ComputedExpression::__float () const [virtual], [inherited]
```

Perform a type cast to float.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.34.3.8 \_\_getIterator()

```
GarbageCollected ComputedExpression::__getIterator (
    const GarbageCollected & collection ) const [virtual], [inherited]
```

Get an iterator for the expression.

#### Parameters

<i>collection</i>	The <a href="#">GarbageCollected</a> value that will serve as the collection through which to iterate.
-------------------	--

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.34.3.9 \_\_index()

```
GarbageCollected ComputedExpression::__index (
    const GarbageCollected & index ) const [virtual], [inherited]
```

Perform an index operation.

#### Parameters

<i>index</i>	The index expression provided by the script.
--------------	--

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.34.3.10 \_\_integer()

```
GarbageCollected ComputedExpression::__integer ( ) const [virtual], [inherited]
```

Perform a type cast to integer.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.34.3.11 \_\_iteratorNext()

```
GarbageCollected ComputedExpression::__iteratorNext (
    size_t index = 0 ) const [virtual], [inherited]
```

Get the next iterative value.

**Parameters**

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIterator](#), and [Tang::ComputedExpressionArray](#).

**5.34.3.12 \_\_lessThan()**

```
GarbageCollected ComputedExpression::__lessThan (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the "less than" comparison.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.34.3.13 \_\_modulo()**

```
GarbageCollected ComputedExpression::__modulo (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of moduloing this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to modulo this by.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionError](#).

### 5.34.3.14 `__multiply()`

```
GarbageCollected ComputedExpression::__multiply (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of multiplying this value and the supplied value.

#### Parameters

<i>rhs</i>	The <code>GarbageCollected</code> value to multiply to this.
------------	--

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.34.3.15 `__negative()`

```
GarbageCollected ComputedExpression::__negative () const [virtual], [inherited]
```

Compute the result of negating this value.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.34.3.16 `__not()`

```
GarbageCollected ComputedExpression::__not () const [virtual], [inherited]
```

Compute the logical not of this value.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.34.3.17 `__period()`

```
GarbageCollected ComputedExpression::__period (
    const GarbageCollected & member,
    std::shared_ptr< TangBase > & tang ) const [virtual], [inherited]
```

Perform a member access (period) operation.

## Parameters

<i>member</i>	The member expression provided by the script.
---------------	---

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionLibrary](#).

**5.34.3.18 \_\_slice()**

```
GarbageCollected ComputedExpression::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [virtual], [inherited]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

## Parameters

<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), and [Tang::ComputedExpressionArray](#).

**5.34.3.19 \_\_string()**

```
GarbageCollected ComputedExpression::__string ( ) const [virtual], [inherited]
```

Perform a type cast to string.

## Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIteratorEnd](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionArray](#).

### 5.34.3.20 `__subtract()`

```
GarbageCollected ComputedExpression::__subtract (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of subtracting this value and the supplied value.

#### Parameters

<i>rhs</i>	The <code>GarbageCollected</code> value to subtract from this.
------------	--

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.34.3.21 `dump()`

```
string ComputedExpressionCompiledFunction::dump ( ) const [override], [virtual]
```

Output the contents of the `ComputedExpression` as a string.

#### Returns

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

### 5.34.3.22 `is_equal()` [1/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const bool & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionBoolean](#).

### 5.34.3.23 `is_equal()` [2/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Error & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionError](#).

### 5.34.3.24 `is_equal()` [3/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::nullptr_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

#### Returns

True if equal, false if not.

### 5.34.3.25 `is_equal()` [4/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::string & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#).

**5.34.3.26 is\_equal() [5/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::float_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.34.3.27 is\_equal() [6/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::integer_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.34.3.28 isCopyNeeded()**

```
bool ComputedExpression::isCopyNeeded ( ) const [virtual], [inherited]
```

Determine whether or not a copy is needed.

Copying is only required for `ComputedExpressions` which serve as containers, such as `ComputedExpressionArray` and `ComputedExpressionObject`.

#### Returns

Whether or not a copy is needed.

Reimplemented in `Tang::ComputedExpressionMap`, and `Tang::ComputedExpressionArray`.

#### 5.34.3.29 `makeCopy()`

`GarbageCollected` `ComputedExpressionCompiledFunction::makeCopy ( ) const [override], [virtual]`

Make a copy of the `ComputedExpression` (recursively, if appropriate).

#### Returns

A `Tang::GarbageCollected` value for the new `ComputedExpression`.

Reimplemented from `Tang::ComputedExpression`.

The documentation for this class was generated from the following files:


- `include/computedExpressionCompiledFunction.hpp`
- `src/computedExpressionCompiledFunction.cpp`

## 5.35 `Tang::ComputedExpressionError` Class Reference


Represents a Runtime `Error`.

```
#include <computedExpressionError.hpp>
```

Inheritance diagram for `Tang::ComputedExpressionError`:

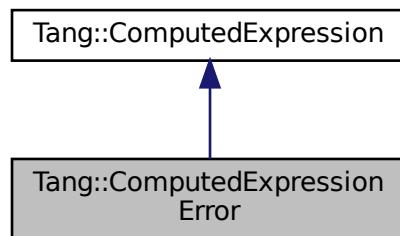

Collaboration diagram for Tang::ComputedExpressionError:

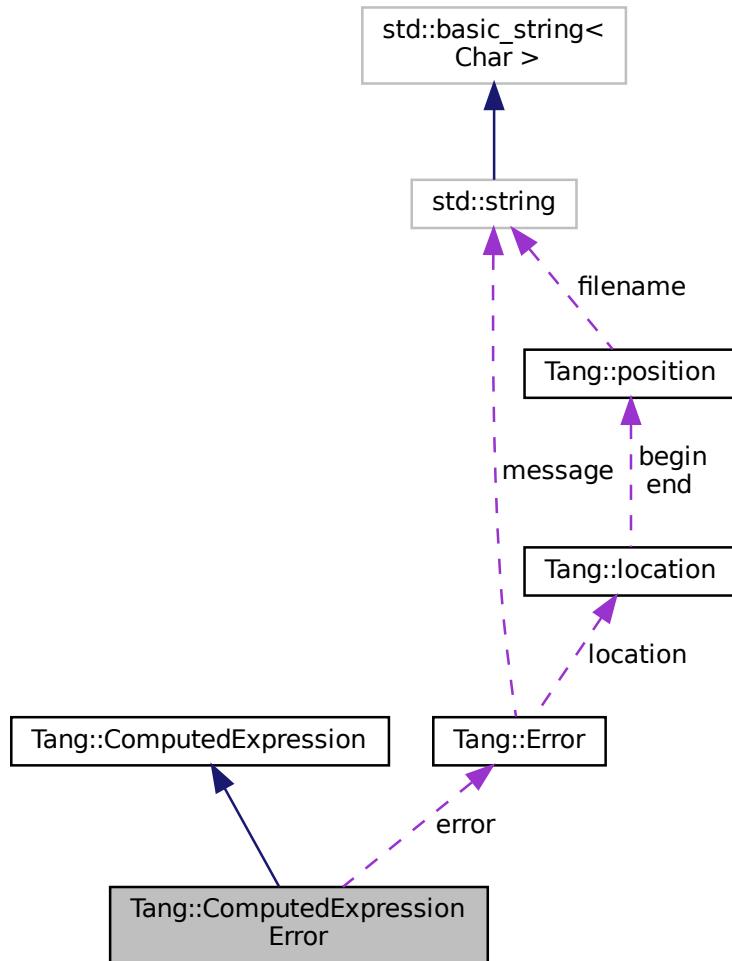

## Public Member Functions

- `ComputedExpressionError (Tang::Error error)`  
*Construct a Runtime Error.*
- `virtual std::string dump () const override`  
*Output the contents of the `ComputedExpression` as a string.*
- `GarbageCollected makeCopy () const override`  
*Make a copy of the `ComputedExpression` (recursively, if appropriate).*
- `virtual bool is_equal (const Error &val) const override`  
*Check whether or not the computed expression is equal to another value.*
- `virtual GarbageCollected __add (const GarbageCollected &rhs) const override`  
*Compute the result of adding this value and the supplied value.*
- `virtual GarbageCollected __subtract (const GarbageCollected &rhs) const override`  
*Compute the result of subtracting this value and the supplied value.*
- `virtual GarbageCollected __multiply (const GarbageCollected &rhs) const override`

- virtual `GarbageCollected __divide` (const `GarbageCollected &rhs`) const override
 

*Compute the result of dividing this value and the supplied value.*
- virtual `GarbageCollected __modulo` (const `GarbageCollected &rhs`) const override
 

*Compute the result of moduloing this value and the supplied value.*
- virtual `GarbageCollected __negative` () const override
 

*Compute the result of negating this value.*
- virtual `GarbageCollected __not` () const override
 

*Compute the logical not of this value.*
- virtual `GarbageCollected __lessThan` (const `GarbageCollected &rhs`) const override
 

*Compute the "less than" comparison.*
- virtual `GarbageCollected __equal` (const `GarbageCollected &rhs`) const override
 

*Perform an equality test.*
- virtual `GarbageCollected __integer` () const override
 

*Perform a type cast to integer.*
- virtual `GarbageCollected __float` () const override
 

*Perform a type cast to float.*
- virtual `GarbageCollected __boolean` () const override
 

*Perform a type cast to boolean.*
- virtual `GarbageCollected __string` () const override
 

*Perform a type cast to string.*
- virtual `std::string __asCode` () const
 

*Output the contents of the `ComputedExpression` as a string similar to how it would be represented as code.*
- virtual `bool isCopyNeeded` () const
 

*Determine whether or not a copy is needed.*
- virtual `bool is_equal` (const `Tang::integer_t &val`) const
 

*Check whether or not the computed expression is equal to another value.*
- virtual `bool is_equal` (const `Tang::float_t &val`) const
 

*Check whether or not the computed expression is equal to another value.*
- virtual `bool is_equal` (const `bool &val`) const
 

*Check whether or not the computed expression is equal to another value.*
- virtual `bool is_equal` (const `std::string &val`) const
 

*Check whether or not the computed expression is equal to another value.*
- virtual `bool is_equal` (const `std::nullptr_t &val`) const
 

*Check whether or not the computed expression is equal to another value.*
- virtual `GarbageCollected __assign_index` (const `GarbageCollected &index`, const `GarbageCollected &value`)
 

*Perform an index assignment to the supplied value.*
- virtual `GarbageCollected __period` (const `GarbageCollected &member`, `std::shared_ptr<TangBase> &tang`) const
 

*Perform a member access (period) operation.*
- virtual `GarbageCollected __index` (const `GarbageCollected &index`) const
 

*Perform an index operation.*
- virtual `GarbageCollected __slice` (const `GarbageCollected &begin`, const `GarbageCollected &end`, const `GarbageCollected &skip`) const
 

*Perform a slice operation.*
- virtual `GarbageCollected __getIterator` (const `GarbageCollected &collection`) const
 

*Get an iterator for the expression.*
- virtual `GarbageCollected __iteratorNext` (`size_t index=0`) const
 

*Get the next iterative value.*

## Private Attributes

- `Tang::Error error`

*The `Error` object.*

### 5.35.1 Detailed Description

Represents a Runtime [Error](#).

### 5.35.2 Constructor & Destructor Documentation

#### 5.35.2.1 ComputedExpressionError()

```
ComputedExpressionError::ComputedExpressionError (
```

<code>Tang::Error</code>	<code>error</code>
--------------------------	--------------------

```
        )
```

Construct a Runtime [Error](#).

##### Parameters

<code>error</code>	The <code>Tang::Error</code> object.
--------------------	--------------------------------------

### 5.35.3 Member Function Documentation

#### 5.35.3.1 \_\_add()

```
GarbageCollected ComputedExpressionError::__add (
```

<code>const GarbageCollected</code>	<code>&amp; rhs</code>
-------------------------------------	------------------------

```
        ) const [override], [virtual]
```

Compute the result of adding this value and the supplied value.

##### Parameters

<code>rhs</code>	The <code>GarbageCollected</code> value to add to this.
------------------	---

##### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.35.3.2 `__asCode()`

```
string ComputedExpression::__asCode ( ) const [virtual], [inherited]
```

Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.

#### Returns

A code-string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.35.3.3 `__assign_index()`

```
GarbageCollected ComputedExpression::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value ) [virtual], [inherited]
```

Perform an index assignment to the supplied value.

#### Parameters

<i>index</i>	The index to which the value should be applied.
<i>value</i>	The value to store.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.35.3.4 `__boolean()`

```
GarbageCollected ComputedExpressionError::__boolean ( ) const [override], [virtual]
```

Perform a type cast to boolean.

#### Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.35.3.5 `__divide()`

```
GarbageCollected ComputedExpressionError::__divide (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of dividing this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to divide this by.
------------	---

**Returns**

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.35.3.6 [\\_\\_equal\(\)](#)

```
GarbageCollected ComputedExpressionError::__equal (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Perform an equality test.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.35.3.7 [\\_\\_float\(\)](#)

```
GarbageCollected ComputedExpressionError::__float ( ) const [override], [virtual]
```

Perform a type cast to float.

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.35.3.8 [\\_\\_getIterator\(\)](#)

```
GarbageCollected ComputedExpression::__getIterator (
    const GarbageCollected & collection ) const [virtual], [inherited]
```

Get an iterator for the expression.

**Parameters**

<i>collection</i>	The <a href="#">GarbageCollected</a> value that will serve as the collection through which to iterate.
-------------------	--

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

**5.35.3.9 \_\_index()**

```
GarbageCollected ComputedExpression::__index (
    const GarbageCollected & index ) const [virtual], [inherited]
```

Perform an index operation.

**Parameters**

<i>index</i>	The index expression provided by the script.
--------------	--

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

**5.35.3.10 \_\_integer()**

```
GarbageCollected ComputedExpressionError::__integer ( ) const [override], [virtual]
```

Perform a type cast to integer.

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

**5.35.3.11 \_\_iteratorNext()**

```
GarbageCollected ComputedExpression::__iteratorNext (
    size_t index = 0 ) const [virtual], [inherited]
```

Get the next iterative value.

**Parameters**

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIterator](#), and [Tang::ComputedExpressionArray](#).

### 5.35.3.12 `__lessThan()`

```
GarbageCollected ComputedExpressionError::__lessThan (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the "less than" comparison.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.35.3.13 `__modulo()`

```
GarbageCollected ComputedExpressionError::__modulo (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of moduloing this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to modulo this by.
------------	---

**Returns**

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.35.3.14 `__multiply()`

```
GarbageCollected ComputedExpressionError::__multiply (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of multiplying this value and the supplied value.

#### Parameters

<code>rhs</code>	The <code>GarbageCollected</code> value to multiply to this.
------------------	--

#### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.35.3.15 `__negative()`

```
GarbageCollected ComputedExpressionError::__negative ( ) const [override], [virtual]
```

Compute the result of negating this value.

#### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.35.3.16 `__not()`

```
GarbageCollected ComputedExpressionError::__not ( ) const [override], [virtual]
```

Compute the logical not of this value.

#### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.35.3.17 `__period()`

```
GarbageCollected ComputedExpression::__period (
    const GarbageCollected & member,
    std::shared_ptr< TangBase > & tang ) const [virtual], [inherited]
```

Perform a member access (period) operation.

## Parameters

<i>member</i>	The member expression provided by the script.
---------------	---

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionLibrary](#).

**5.35.3.18 \_\_slice()**

```
GarbageCollected ComputedExpression::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [virtual], [inherited]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

## Parameters

<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), and [Tang::ComputedExpressionArray](#).

**5.35.3.19 \_\_string()**

```
GarbageCollected ComputedExpressionError::__string ( ) const [override], [virtual]
```

Perform a type cast to string.

## Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.35.3.20 `__subtract()`

```
GarbageCollected ComputedExpressionError::__subtract (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of subtracting this value and the supplied value.

#### Parameters

<i>rhs</i>	The <code>GarbageCollected</code> value to subtract from this.
------------	--

#### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.35.3.21 `dump()`

```
std::string ComputedExpressionError::dump ( ) const [override], [virtual]
```

Output the contents of the `ComputedExpression` as a string.

#### Returns

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

### 5.35.3.22 `is_equal()` [1/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const bool & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionBoolean](#).

### 5.35.3.23 is\_equal() [2/6]

```
bool ComputedExpressionError::is_equal (
    const Error & val ) const [override], [virtual]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

val	The value to compare against.
-----	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented from [Tang::ComputedExpression](#).

### 5.35.3.24 is\_equal() [3/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::nullptr_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

val	The value to compare against.
-----	-------------------------------

#### Returns

True if equal, false if not.

### 5.35.3.25 is\_equal() [4/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::string & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

val	The value to compare against.
-----	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#).

**5.35.3.26 is\_equal() [5/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::float_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.35.3.27 is\_equal() [6/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::integer_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.35.3.28 isCopyNeeded()**

```
bool ComputedExpression::isCopyNeeded ( ) const [virtual], [inherited]
```

Determine whether or not a copy is needed.

Copying is only required for **ComputedExpressions** which serve as containers, such as [ComputedExpressionArray](#) and [ComputedExpressionObject](#).

#### Returns

Whether or not a copy is needed.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

#### 5.35.3.29 **makeCopy()**

[GarbageCollected](#) `ComputedExpressionError::makeCopy ( ) const [override], [virtual]`

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

#### Returns

A [Tang::GarbageCollected](#) value for the new [ComputedExpression](#).

Reimplemented from [Tang::ComputedExpression](#).

The documentation for this class was generated from the following files:


- [include/computedExpressionError.hpp](#)
- [src/computedExpressionError.cpp](#)

## 5.36 **Tang::ComputedExpressionFloat** Class Reference


Represents a **Float** that is the result of a computation.

```
#include <computedExpressionFloat.hpp>
```

Inheritance diagram for [Tang::ComputedExpressionFloat](#):

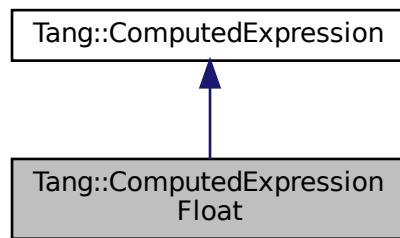

Collaboration diagram for Tang::ComputedExpressionFloat:

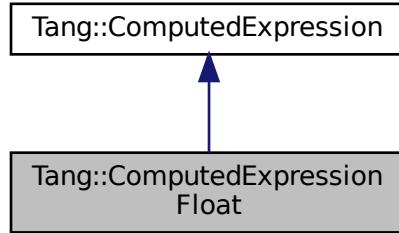

## Public Member Functions

- **ComputedExpressionFloat (Tang::float\_t val)**  
*Construct a Float result.*
- virtual std::string **dump () const override**  
*Output the contents of the [ComputedExpression](#) as a string.*
- **GarbageCollected makeCopy () const override**  
*Make a copy of the [ComputedExpression](#) (recursively, if appropriate).*
- virtual bool **is\_equal (const Tang::integer\_t &val) const override**  
*Check whether or not the computed expression is equal to another value.*
- virtual bool **is\_equal (const Tang::float\_t &val) const override**  
*Check whether or not the computed expression is equal to another value.*
- virtual bool **is\_equal (const bool &val) const override**  
*Check whether or not the computed expression is equal to another value.*
- virtual **GarbageCollected \_\_add (const GarbageCollected &rhs) const override**  
*Compute the result of adding this value and the supplied value.*
- virtual **GarbageCollected \_\_subtract (const GarbageCollected &rhs) const override**  
*Compute the result of subtracting this value and the supplied value.*
- virtual **GarbageCollected \_\_multiply (const GarbageCollected &rhs) const override**  
*Compute the result of multiplying this value and the supplied value.*
- virtual **GarbageCollected \_\_divide (const GarbageCollected &rhs) const override**  
*Compute the result of dividing this value and the supplied value.*
- virtual **GarbageCollected \_\_negative () const override**  
*Compute the result of negating this value.*
- virtual **GarbageCollected \_\_not () const override**  
*Compute the logical not of this value.*
- virtual **GarbageCollected \_\_lessThan (const GarbageCollected &rhs) const override**  
*Compute the "less than" comparison.*
- virtual **GarbageCollected \_\_equal (const GarbageCollected &rhs) const override**  
*Perform an equality test.*
- virtual **GarbageCollected \_\_integer () const override**  
*Perform a type cast to integer.*
- virtual **GarbageCollected \_\_float () const override**  
*Perform a type cast to float.*

- virtual `GarbageCollected __boolean () const override`  
*Perform a type cast to boolean.*
- virtual `GarbageCollected __string () const override`  
*Perform a type cast to string.*
- `Tang::float_t getValue () const`  
*Helper function to get the value associated with this expression.*
- virtual `std::string __asCode () const`  
*Output the contents of the `ComputedExpression` as a string similar to how it would be represented as code.*
- virtual `bool isCopyNeeded () const`  
*Determine whether or not a copy is needed.*
- virtual `bool is_equal (const std::string &val) const`  
*Check whether or not the computed expression is equal to another value.*
- virtual `bool is_equal (const Error &val) const`  
*Check whether or not the computed expression is equal to another value.*
- virtual `bool is_equal (const std::nullptr_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- virtual `GarbageCollected __assign_index (const GarbageCollected &index, const GarbageCollected &value)`  
*Perform an index assignment to the supplied value.*
- virtual `GarbageCollected __modulo (const GarbageCollected &rhs) const`  
*Compute the result of moduloing this value and the supplied value.*
- virtual `GarbageCollected __period (const GarbageCollected &member, std::shared_ptr< TangBase > &tang) const`  
*Perform a member access (period) operation.*
- virtual `GarbageCollected __index (const GarbageCollected &index) const`  
*Perform an index operation.*
- virtual `GarbageCollected __slice (const GarbageCollected &begin, const GarbageCollected &end, const GarbageCollected &skip) const`  
*Perform a slice operation.*
- virtual `GarbageCollected __getIterator (const GarbageCollected &collection) const`  
*Get an iterator for the expression.*
- virtual `GarbageCollected __iteratorNext (size_t index=0) const`  
*Get the next iterative value.*

## Private Attributes

- `Tang::float_t val`  
*The float value.*

### 5.36.1 Detailed Description

Represents a Float that is the result of a computation.

### 5.36.2 Constructor & Destructor Documentation

#### 5.36.2.1 ComputedExpressionFloat()

```
ComputedExpressionFloat::ComputedExpressionFloat (
    Tang::float_t val )
```

Construct a Float result.

## Parameters

<i>val</i>	The float value.
------------	------------------

### 5.36.3 Member Function Documentation

#### 5.36.3.1 `__add()`

```
GarbageCollected ComputedExpressionFloat::__add (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of adding this value and the supplied value.

## Parameters


<i>rhs</i>	The <code>GarbageCollected</code> value to add to this.
------------	---

## Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



#### 5.36.3.2 `__asCode()`

```
string ComputedExpression::__asCode ( ) const [virtual], [inherited]
```

Output the contents of the `ComputedExpression` as a string similar to how it would be represented as code.

## Returns

A code-string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.36.3.3 `__assign_index()`

```
GarbageCollected ComputedExpression::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value )  [virtual], [inherited]
```

Perform an index assignment to the supplied value.

#### Parameters

<i>index</i>	The index to which the value should be applied.
<i>value</i>	The value to store.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.36.3.4 `__boolean()`

```
GarbageCollected ComputedExpressionFloat::__boolean ( ) const [override], [virtual]
```

Perform a type cast to boolean.

#### Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.36.3.5 `__divide()`

```
GarbageCollected ComputedExpressionFloat::__divide (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of dividing this value and the supplied value.

#### Parameters


<i>rhs</i>	The <a href="#">GarbageCollected</a> value to divide this by.
------------	---

#### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.36.3.6 \_\_equal()

```
GarbageCollected ComputedExpressionFloat::__equal (\n    const GarbageCollected & rhs ) const [override], [virtual]
```

Perform an equality test.

#### Parameters


<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

#### Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.36.3.7 \_\_float()

```
GarbageCollected ComputedExpressionFloat::__float () const [override], [virtual]
```

Perform a type cast to float.

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.36.3.8 `__getIterator()`

```
GarbageCollected ComputedExpression::__getIterator (
    const GarbageCollected & collection ) const [virtual], [inherited]
```

Get an iterator for the expression.

**Parameters**

<i>collection</i>	The <a href="#">GarbageCollected</a> value that will serve as the collection through which to iterate.
-------------------	--

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.36.3.9 `__index()`

```
GarbageCollected ComputedExpression::__index (
    const GarbageCollected & index ) const [virtual], [inherited]
```

Perform an index operation.

**Parameters**

<i>index</i>	The index expression provided by the script.
--------------	--

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.36.3.10 `__integer()`

```
GarbageCollected ComputedExpressionFloat::__integer ( ) const [override], [virtual]
```

Perform a type cast to integer.

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.36.3.11 `__iteratorNext()`

```
GarbageCollected ComputedExpression::__iteratorNext (
    size_t index = 0 ) const [virtual], [inherited]
```

Get the next iterative value.

#### Parameters

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIterator](#), and [Tang::ComputedExpressionArray](#).

### 5.36.3.12 `__lessThan()`

```
GarbageCollected ComputedExpressionFloat::__lessThan (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the "less than" comparison.

#### Parameters


<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

#### Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.36.3.13 `__modulo()`

```
GarbageCollected ComputedExpression::__modulo (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of moduloing this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to modulo this by.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionError](#).

### 5.36.3.14 [\\_\\_multiply\(\)](#)

```
GarbageCollected ComputedExpressionFloat::__multiply (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of multiplying this value and the supplied value.

**Parameters**


<i>rhs</i>	The <a href="#">GarbageCollected</a> value to multiply to this.
------------	---

**Returns**

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.36.3.15 [\\_\\_negative\(\)](#)

```
GarbageCollected ComputedExpressionFloat::__negative ( ) const [override], [virtual]
```

Compute the result of negating this value.

**Returns**

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.36.3.16 `__not()`

```
GarbageCollected ComputedExpressionFloat::__not ( ) const [override], [virtual]
```

Compute the logical not of this value.

#### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.36.3.17 `__period()`

```
GarbageCollected ComputedExpression::__period (
    const GarbageCollected & member,
    std::shared_ptr< TangBase > & tang ) const [virtual], [inherited]
```

Perform a member access (period) operation.

#### Parameters

<i>member</i>	The member expression provided by the script.
---------------	---

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionLibrary](#).

### 5.36.3.18 `__slice()`

```
GarbageCollected ComputedExpression::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [virtual], [inherited]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

#### Parameters

<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), and [Tang::ComputedExpressionArray](#).

### 5.36.3.19 `__string()`

```
GarbageCollected ComputedExpressionFloat::__string ( ) const [override], [virtual]
```


Perform a type cast to string.

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.36.3.20 `__subtract()`

```
GarbageCollected ComputedExpressionFloat::__subtract ( \n    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of subtracting this value and the supplied value.

**Parameters**


<i>rhs</i>	The <a href="#">GarbageCollected</a> value to subtract from this.
------------	---

**Returns**

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.36.3.21 `dump()`

```
string ComputedExpressionFloat::dump ( ) const [override], [virtual]
```

Output the contents of the [ComputedExpression](#) as a string.

#### Returns

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

### 5.36.3.22 `getValue()`

```
Tang::float_t ComputedExpressionFloat::getValue ( ) const
```

Helper function to get the value associated with this expression.

#### Returns

The value associated with this expression.

### 5.36.3.23 `is_equal()` [1/6]

```
bool ComputedExpressionFloat::is_equal (
    const bool & val ) const [override], [virtual]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented from [Tang::ComputedExpression](#).

**5.36.3.24 is\_equal() [2/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Error & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<code>val</code>	The value to compare against.
------------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionError](#).

**5.36.3.25 is\_equal() [3/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::nullptr_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<code>val</code>	The value to compare against.
------------------	-------------------------------

**Returns**

True if equal, false if not.

**5.36.3.26 is\_equal() [4/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::string & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#).

**5.36.3.27 is\_equal() [5/6]**

```
bool ComputedExpressionFloat::is_equal (
    const Tang::float_t & val ) const [override], [virtual]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented from [Tang::ComputedExpression](#).

**5.36.3.28 is\_equal() [6/6]**

```
bool ComputedExpressionFloat::is_equal (
    const Tang::integer_t & val ) const [override], [virtual]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented from [Tang::ComputedExpression](#).

### 5.36.3.29 isCopyNeeded()

```
bool ComputedExpression::isCopyNeeded ( ) const [virtual], [inherited]
```

Determine whether or not a copy is needed.

Copying is only required for ComputedExpressions which serve as containers, such as [ComputedExpressionArray](#) and [ComputedExpressionObject](#).

#### Returns

Whether or not a copy is needed.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.36.3.30 makeCopy()

```
GarbageCollected ComputedExpressionFloat::makeCopy ( ) const [override], [virtual]
```

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

#### Returns

A [Tang::GarbageCollected](#) value for the new [ComputedExpression](#).

Reimplemented from [Tang::ComputedExpression](#).

The documentation for this class was generated from the following files:


- [include/computedExpressionFloat.hpp](#)
- [src/computedExpressionFloat.cpp](#)

## 5.37 Tang::ComputedExpressionInteger Class Reference


Represents an Integer that is the result of a computation.

```
#include <computedExpressionInteger.hpp>
```

Inheritance diagram for Tang::ComputedExpressionInteger:

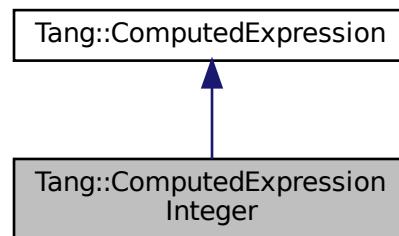

Collaboration diagram for Tang::ComputedExpressionInteger:

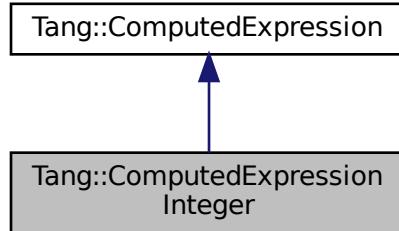

## Public Member Functions

- **ComputedExpressionInteger (Tang::integer\_t val)**  
*Construct an Integer result.*
- **virtual std::string dump () const override**  
*Output the contents of the [ComputedExpression](#) as a string.*
- **GarbageCollected makeCopy () const override**  
*Make a copy of the [ComputedExpression](#) (recursively, if appropriate).*
- **virtual bool is\_equal (const Tang::integer\_t &val) const override**  
*Check whether or not the computed expression is equal to another value.*
- **virtual bool is\_equal (const Tang::float\_t &val) const override**  
*Check whether or not the computed expression is equal to another value.*
- **virtual bool is\_equal (const bool &val) const override**  
*Check whether or not the computed expression is equal to another value.*
- **virtual GarbageCollected \_\_add (const GarbageCollected &rhs) const override**  
*Compute the result of adding this value and the supplied value.*
- **virtual GarbageCollected \_\_subtract (const GarbageCollected &rhs) const override**  
*Compute the result of subtracting this value and the supplied value.*
- **virtual GarbageCollected \_\_multiply (const GarbageCollected &rhs) const override**  
*Compute the result of multiplying this value and the supplied value.*
- **virtual GarbageCollected \_\_divide (const GarbageCollected &rhs) const override**  
*Compute the result of dividing this value and the supplied value.*
- **virtual GarbageCollected \_\_modulo (const GarbageCollected &rhs) const override**  
*Compute the result of moduloing this value and the supplied value.*
- **virtual GarbageCollected \_\_negative () const override**  
*Compute the result of negating this value.*
- **virtual GarbageCollected \_\_not () const override**  
*Compute the logical not of this value.*
- **virtual GarbageCollected \_\_lessThan (const GarbageCollected &rhs) const override**  
*Compute the "less than" comparison.*
- **virtual GarbageCollected \_\_equal (const GarbageCollected &rhs) const override**  
*Perform an equality test.*
- **virtual GarbageCollected \_\_integer () const override**  
*Perform a type cast to integer.*

- virtual `GarbageCollected __float () const` override  
*Perform a type cast to float.*
- virtual `GarbageCollected __boolean () const` override  
*Perform a type cast to boolean.*
- virtual `GarbageCollected __string () const` override  
*Perform a type cast to string.*
- `Tang::integer_t getValue () const`  
*Helper function to get the value associated with this expression.*
- `virtual std::string __asCode () const`  
*Output the contents of the `ComputedExpression` as a string similar to how it would be represented as code.*
- `virtual bool isCopyNeeded () const`  
*Determine whether or not a copy is needed.*
- `virtual bool is_equal (const std::string &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const Error &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const std::nullptr_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- virtual `GarbageCollected __assign_index (const GarbageCollected &index, const GarbageCollected &value)`  
*Perform an index assignment to the supplied value.*
- `virtual GarbageCollected __period (const GarbageCollected &member, std::shared_ptr< TangBase > &tang) const`  
*Perform a member access (period) operation.*
- `virtual GarbageCollected __index (const GarbageCollected &index) const`  
*Perform an index operation.*
- `virtual GarbageCollected __slice (const GarbageCollected &begin, const GarbageCollected &end, const GarbageCollected &skip) const`  
*Perform a slice operation.*
- `virtual GarbageCollected __getIterator (const GarbageCollected &collection) const`  
*Get an iterator for the expression.*
- `virtual GarbageCollected __iteratorNext (size_t index=0) const`  
*Get the next iterative value.*

## Private Attributes

- `Tang::integer_t val`  
*The integer value.*

### 5.37.1 Detailed Description

Represents an Integer that is the result of a computation.

### 5.37.2 Constructor & Destructor Documentation

#### 5.37.2.1 ComputedExpressionInteger()

```
ComputedExpressionInteger::ComputedExpressionInteger (
    Tang::integer_t val )
```

Construct an Integer result.

## Parameters

<i>val</i>	The integer value.
------------	--------------------

### 5.37.3 Member Function Documentation

#### 5.37.3.1 `__add()`

```
GarbageCollected ComputedExpressionInteger::__add (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of adding this value and the supplied value.

## Parameters

<i>rhs</i>	The <code>GarbageCollected</code> value to add to this.
------------	---

## Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



#### 5.37.3.2 `__asCode()`

```
string ComputedExpression::__asCode ( ) const [virtual], [inherited]
```

Output the contents of the `ComputedExpression` as a string similar to how it would be represented as code.

## Returns

A code-string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.37.3.3 `__assign_index()`

```
GarbageCollected ComputedExpression::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value )  [virtual], [inherited]
```

Perform an index assignment to the supplied value.

#### Parameters

<code>index</code>	The index to which the value should be applied.
<code>value</code>	The value to store.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.37.3.4 `__boolean()`

```
GarbageCollected ComputedExpressionInteger::__boolean ( ) const [override], [virtual]
```

Perform a type cast to boolean.

#### Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.37.3.5 `__divide()`

```
GarbageCollected ComputedExpressionInteger::__divide (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of dividing this value and the supplied value.

#### Parameters


<code>rhs</code>	The <a href="#">GarbageCollected</a> value to divide this by.
------------------	---

#### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.37.3.6 \_\_equal()

```
GarbageCollected ComputedExpressionInteger::__equal (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Perform an equality test.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

#### Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.37.3.7 \_\_float()

```
GarbageCollected ComputedExpressionInteger::__float () const [override], [virtual]
```

Perform a type cast to float.

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.37.3.8 `__getIterator()`

```
GarbageCollected ComputedExpression::__getIterator (
    const GarbageCollected & collection ) const [virtual], [inherited]
```

Get an iterator for the expression.

**Parameters**

<i>collection</i>	The <a href="#">GarbageCollected</a> value that will serve as the collection through which to iterate.
-------------------	--

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.37.3.9 `__index()`

```
GarbageCollected ComputedExpression::__index (
    const GarbageCollected & index ) const [virtual], [inherited]
```

Perform an index operation.

**Parameters**

<i>index</i>	The index expression provided by the script.
--------------	--

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.37.3.10 `__integer()`

```
GarbageCollected ComputedExpressionInteger::__integer ( ) const [override], [virtual]
```

Perform a type cast to integer.

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.37.3.11 `__iteratorNext()`

```
GarbageCollected ComputedExpression::__iteratorNext (
    size_t index = 0 ) const [virtual], [inherited]
```

Get the next iterative value.

#### Parameters

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIterator](#), and [Tang::ComputedExpressionArray](#).

### 5.37.3.12 `__lessThan()`

```
GarbageCollected ComputedExpressionInteger::__lessThan (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the "less than" comparison.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

#### Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.37.3.13 `__modulo()`

```
GarbageCollected ComputedExpressionInteger::__modulo (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of moduloing this value and the supplied value.

**Parameters**


<i>rhs</i>	The <a href="#">GarbageCollected</a> value to modulo this by.
------------	---

**Returns**

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.37.3.14 \_\_multiply()

```
GarbageCollected ComputedExpressionInteger::__multiply (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of multiplying this value and the supplied value.

**Parameters**


<i>rhs</i>	The <a href="#">GarbageCollected</a> value to multiply to this.
------------	---

**Returns**

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.37.3.15 `__negative()`

```
GarbageCollected ComputedExpressionInteger::__negative ( ) const [override], [virtual]
```

Compute the result of negating this value.

#### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.37.3.16 `__not()`

```
GarbageCollected ComputedExpressionInteger::__not ( ) const [override], [virtual]
```

Compute the logical not of this value.

#### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.37.3.17 `__period()`

```
GarbageCollected ComputedExpression::__period (
    const GarbageCollected & member,
    std::shared_ptr< TangBase > & tang ) const [virtual], [inherited]
```

Perform a member access (period) operation.

#### Parameters

<code>member</code>	The member expression provided by the script.
---------------------	---

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionLibrary](#).

### 5.37.3.18 `__slice()`

```
GarbageCollected ComputedExpression::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [virtual], [inherited]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

#### Parameters

<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), and [Tang::ComputedExpressionArray](#).

### 5.37.3.19 `__string()`

```
GarbageCollected ComputedExpressionInteger::__string () const [override], [virtual]
```

Perform a type cast to string.

#### Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.37.3.20 `__subtract()`

```
GarbageCollected ComputedExpressionInteger::__subtract (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of subtracting this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to subtract from this.
------------	---

**Returns**

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

**5.37.3.21 dump()**

```
string ComputedExpressionInteger::dump ( ) const [override], [virtual]
```

Output the contents of the [ComputedExpression](#) as a string.

**Returns**

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

**5.37.3.22 getValue()**

```
Tang::integer_t ComputedExpressionInteger::getValue ( ) const
```

Helper function to get the value associated with this expression.

**Returns**

The value associated with this expression.

**5.37.3.23 is\_equal() [1/6]**

```
bool ComputedExpressionInteger::is_equal (
    const bool & val ) const [override], [virtual]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented from [Tang::ComputedExpression](#).

**5.37.3.24 is\_equal() [2/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Error & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionError](#).

**5.37.3.25 is\_equal() [3/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::nullptr_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

### 5.37.3.26 `is_equal()` [4/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::string & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.37.3.27 `is_equal()` [5/6]

```
bool ComputedExpressionInteger::is_equal (
    const Tang::float_t & val ) const [override], [virtual]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented from [Tang::ComputedExpression](#).

### 5.37.3.28 `is_equal()` [6/6]

```
bool ComputedExpressionInteger::is_equal (
    const Tang::integer_t & val ) const [override], [virtual]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented from [Tang::ComputedExpression](#).

### 5.37.3.29 isCopyNeeded()

```
bool ComputedExpression::isCopyNeeded ( ) const [virtual], [inherited]
```

Determine whether or not a copy is needed.

Copying is only required for ComputedExpressions which serve as containers, such as [ComputedExpressionArray](#) and [ComputedExpressionObject](#).

**Returns**

Whether or not a copy is needed.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.37.3.30 makeCopy()

```
GarbageCollected ComputedExpressionInteger::makeCopy ( ) const [override], [virtual]
```

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

**Returns**

A [Tang::GarbageCollected](#) value for the new [ComputedExpression](#).

Reimplemented from [Tang::ComputedExpression](#).

The documentation for this class was generated from the following files:


- [include/computedExpressionInteger.hpp](#)
- [src/computedExpressionInteger.cpp](#)

## 5.38 Tang::ComputedExpressionIterator Class Reference


Represents an iterator that is the result of a computation.

```
#include <computedExpressionIterator.hpp>
```

Inheritance diagram for Tang::ComputedExpressionIterator:

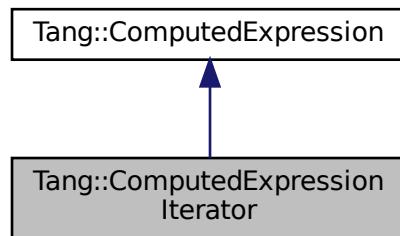

Collaboration diagram for Tang::ComputedExpressionIterator:

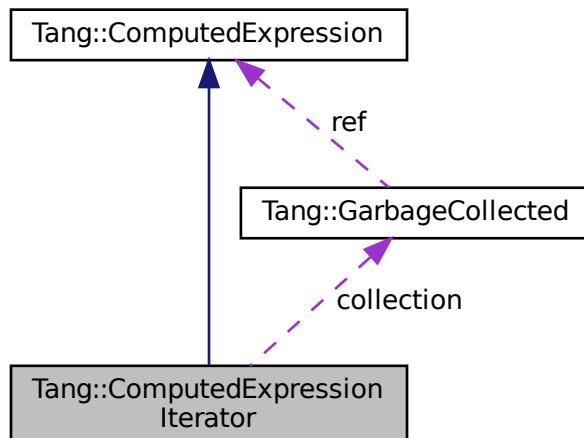

### Public Member Functions

- [ComputedExpressionIterator \(Tang::GarbageCollected collection\)](#)  
*Construct an iterator result.*
- [virtual std::string dump \(\) const override](#)  
*Output the contents of the [ComputedExpression](#) as a string.*

- virtual `GarbageCollected __iteratorNext (size_t index) const` override  
*Get the next iterative value.*
- virtual `std::string __asCode () const`  
*Output the contents of the `ComputedExpression` as a string similar to how it would be represented as code.*
- virtual `bool isCopyNeeded () const`  
*Determine whether or not a copy is needed.*
- virtual `GarbageCollected makeCopy () const`  
*Make a copy of the `ComputedExpression` (recursively, if appropriate).*
- virtual `bool is_equal (const Tang::integer_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- virtual `bool is_equal (const Tang::float_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- virtual `bool is_equal (const bool &val) const`  
*Check whether or not the computed expression is equal to another value.*
- virtual `bool is_equal (const std::string &val) const`  
*Check whether or not the computed expression is equal to another value.*
- virtual `bool is_equal (const Error &val) const`  
*Check whether or not the computed expression is equal to another value.*
- virtual `bool is_equal (const std::nullptr_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- virtual `GarbageCollected __assign_index (const GarbageCollected &index, const GarbageCollected &value)`  
*Perform an index assignment to the supplied value.*
- virtual `GarbageCollected __add (const GarbageCollected &rhs) const`  
*Compute the result of adding this value and the supplied value.*
- virtual `GarbageCollected __subtract (const GarbageCollected &rhs) const`  
*Compute the result of subtracting this value and the supplied value.*
- virtual `GarbageCollected __multiply (const GarbageCollected &rhs) const`  
*Compute the result of multiplying this value and the supplied value.*
- virtual `GarbageCollected __divide (const GarbageCollected &rhs) const`  
*Compute the result of dividing this value and the supplied value.*
- virtual `GarbageCollected __modulo (const GarbageCollected &rhs) const`  
*Compute the result of moduloing this value and the supplied value.*
- virtual `GarbageCollected __negative () const`  
*Compute the result of negating this value.*
- virtual `GarbageCollected __not () const`  
*Compute the logical not of this value.*
- virtual `GarbageCollected __lessThan (const GarbageCollected &rhs) const`  
*Compute the "less than" comparison.*
- virtual `GarbageCollected __equal (const GarbageCollected &rhs) const`  
*Perform an equality test.*
- virtual `GarbageCollected __period (const GarbageCollected &member, std::shared_ptr< TangBase > &tang) const`  
*Perform a member access (period) operation.*
- virtual `GarbageCollected __index (const GarbageCollected &index) const`  
*Perform an index operation.*
- virtual `GarbageCollected __slice (const GarbageCollected &begin, const GarbageCollected &end, const GarbageCollected &skip) const`  
*Perform a slice operation.*
- virtual `GarbageCollected __getIterator (const GarbageCollected &collection) const`  
*Get an iterator for the expression.*
- virtual `GarbageCollected __integer () const`

- virtual `GarbageCollected __float () const`

*Perform a type cast to float.*
- virtual `GarbageCollected __boolean () const`

*Perform a type cast to boolean.*
- virtual `GarbageCollected __string () const`

*Perform a type cast to string.*

## Private Attributes

- `Tang::GarbageCollected collection`

*The target collection.*
- `size_t index`

*The next index.*

### 5.38.1 Detailed Description

Represents an Iterator that is the result of a computation.

### 5.38.2 Constructor & Destructor Documentation

#### 5.38.2.1 ComputedExpressionIterator()

```
ComputedExpressionIterator::ComputedExpressionIterator (
    Tang::GarbageCollected collection )
```

Construct an Iterator result.

##### Parameters

<code>collection</code>	The collection through which the iterator processes
-------------------------	---

### 5.38.3 Member Function Documentation

#### 5.38.3.1 \_\_add()

```
GarbageCollected ComputedExpression::__add (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of adding this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to add to this.
------------	--

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.38.3.2 [\\_\\_asCode\(\)](#)

```
string ComputedExpression::__asCode ( ) const [virtual], [inherited]
```

Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.

**Returns**

A code-string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.38.3.3 [\\_\\_assign\\_index\(\)](#)

```
GarbageCollected ComputedExpression::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value ) [virtual], [inherited]
```

Perform an index assignment to the supplied value.

**Parameters**

<i>index</i>	The index to which the value should be applied.
<i>value</i>	The value to store.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.38.3.4 `__boolean()`

```
GarbageCollected ComputedExpression::__boolean ( ) const [virtual], [inherited]
```

Perform a type cast to boolean.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.38.3.5 `__divide()`

```
GarbageCollected ComputedExpression::__divide (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of dividing this value and the supplied value.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to divide this by.
------------	---

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.38.3.6 `__equal()`

```
GarbageCollected ComputedExpression::__equal (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Perform an equality test.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionNativeLibraryFunction](#), [Tang::ComputedExpressionNativeBoundFunction](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), [Tang::ComputedExpressionCompiledFunction](#), and [Tang::ComputedExpressionBoolean](#).

### 5.38.3.7 `__float()`

`GarbageCollected` `ComputedExpression::__float () const [virtual], [inherited]`

Perform a type cast to float.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.38.3.8 `__getIterator()`

`GarbageCollected` `ComputedExpression::__getIterator (`  
`const GarbageCollected & collection ) const [virtual], [inherited]`

Get an iterator for the expression.

#### Parameters

<code>collection</code>	The <code>GarbageCollected</code> value that will serve as the collection through which to iterate.
-------------------------	---

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.38.3.9 `__index()`

`GarbageCollected` `ComputedExpression::__index (`  
`const GarbageCollected & index ) const [virtual], [inherited]`

Perform an index operation.

#### Parameters

<code>index</code>	The index expression provided by the script.
--------------------	--

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.38.3.10 `__integer()`

```
GarbageCollected ComputedExpression::__integer ( ) const [virtual], [inherited]
```

Perform a type cast to integer.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.38.3.11 `__iteratorNext()`

```
GarbageCollected ComputedExpressionIterator::__iteratorNext ( size_t index ) const [override], [virtual]
```

Get the next iterative value.

**Parameters**

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.38.3.12 `__lessThan()`

```
GarbageCollected ComputedExpression::__lessThan (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the "less than" comparison.

#### Parameters

<i>rhs</i>	The <code>GarbageCollected</code> value to compare against.
------------	---

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.38.3.13 `__modulo()`

```
GarbageCollected ComputedExpression::__modulo (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of moduloing this value and the supplied value.

#### Parameters

<i>rhs</i>	The <code>GarbageCollected</code> value to modulo this by.
------------	--

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionError](#).

### 5.38.3.14 `__multiply()`

```
GarbageCollected ComputedExpression::__multiply (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of multiplying this value and the supplied value.

#### Parameters

<i>rhs</i>	The <code>GarbageCollected</code> value to multiply to this.
------------	--

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.38.3.15 `__negative()`

```
GarbageCollected ComputedExpression::__negative ( ) const [virtual], [inherited]
```

Compute the result of negating this value.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.38.3.16 `__not()`

```
GarbageCollected ComputedExpression::__not ( ) const [virtual], [inherited]
```

Compute the logical not of this value.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.38.3.17 `__period()`

```
GarbageCollected ComputedExpression::__period (
    const GarbageCollected & member,
    std::shared_ptr< TangBase > & tang ) const [virtual], [inherited]
```

Perform a member access (period) operation.

**Parameters**

<i>member</i>	The member expression provided by the script.
---------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionLibrary](#).

**5.38.3.18 \_\_slice()**

```
GarbageCollected ComputedExpression::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [virtual], [inherited]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

**Parameters**

<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), and [Tang::ComputedExpressionArray](#).

**5.38.3.19 \_\_string()**

```
GarbageCollected ComputedExpression::__string ( ) const [virtual], [inherited]
```

Perform a type cast to string.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIteratorEnd](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionArray](#).

**5.38.3.20 \_\_subtract()**

```
GarbageCollected ComputedExpression::__subtract (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of subtracting this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to subtract from this.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.38.3.21 dump()**

```
string ComputedExpressionIterator::dump ( ) const [override], [virtual]
```

Output the contents of the [ComputedExpression](#) as a string.

**Returns**

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

**5.38.3.22 is\_equal() [1/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const bool & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionBoolean](#).

### 5.38.3.23 `is_equal()` [2/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Error & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionError](#).

**5.38.3.24 is\_equal() [3/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::nullptr_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

**5.38.3.25 is\_equal() [4/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::string & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.38.3.26 is\_equal() [5/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::float_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

val	The value to compare against.
-----	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

### 5.38.3.27 is\_equal() [6/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::integer_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

val	The value to compare against.
-----	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

### 5.38.3.28 isCopyNeeded()

```
bool ComputedExpression::isCopyNeeded ( ) const [virtual], [inherited]
```

Determine whether or not a copy is needed.

Copying is only required for ComputedExpressions which serve as containers, such as [ComputedExpressionArray](#) and [ComputedExpressionObject](#).

#### Returns

Whether or not a copy is needed.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.38.3.29 `makeCopy()`

```
GarbageCollected ComputedExpression::makeCopy ( ) const [virtual], [inherited]
```

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

#### Returns

A [Tang::GarbageCollected](#) value for the new [ComputedExpression](#).

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionNativeLibraryFunction](#), [Tang::ComputedExpressionNativeBoundFunction](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionLibraryBase](#), [Tang::ComputedExpressionLibrary](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), [Tang::ComputedExpressionCompiledFunction](#), [Tang::ComputedExpressionBoolean](#), and [Tang::ComputedExpressionArray](#).

The documentation for this class was generated from the following files:


- [include/computedExpressionIterator.hpp](#)
- [src/computedExpressionIterator.cpp](#)

## 5.39 `Tang::ComputedExpressionIteratorEnd` Class Reference


Represents that a collection has no more values through which to iterate.

```
#include <computedExpressionIteratorEnd.hpp>
```

Inheritance diagram for `Tang::ComputedExpressionIteratorEnd`:

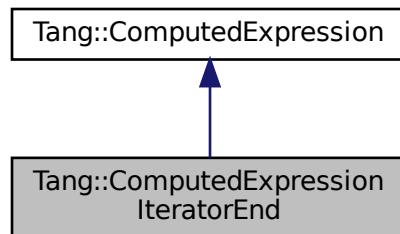

Collaboration diagram for Tang::ComputedExpressionIteratorEnd:

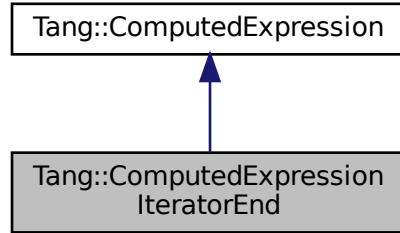

## Public Member Functions

- `ComputedExpressionIteratorEnd ()`  
*Construct an IteratorEnd result.*
- `virtual std::string dump () const override`  
*Output the contents of the [ComputedExpression](#) as a string.*
- `virtual GarbageCollected __string () const override`  
*Perform a type cast to string.*
- `virtual std::string __asCode () const`  
*Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.*
- `virtual bool isCopyNeeded () const`  
*Determine whether or not a copy is needed.*
- `virtual GarbageCollected makeCopy () const`  
*Make a copy of the [ComputedExpression](#) (recursively, if appropriate).*
- `virtual bool is_equal (const Tang::integer_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const Tang::float_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const bool &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const std::string &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const Error &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const std::nullptr_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual GarbageCollected __assign_index (const GarbageCollected &index, const GarbageCollected &value)`  
*Perform an index assignment to the supplied value.*
- `virtual GarbageCollected __add (const GarbageCollected &rhs) const`  
*Compute the result of adding this value and the supplied value.*
- `virtual GarbageCollected __subtract (const GarbageCollected &rhs) const`  
*Compute the result of subtracting this value and the supplied value.*
- `virtual GarbageCollected __multiply (const GarbageCollected &rhs) const`  
*Compute the result of multiplying this value and the supplied value.*

- virtual `GarbageCollected __divide (const GarbageCollected &rhs) const`  
*Compute the result of dividing this value and the supplied value.*
- virtual `GarbageCollected __modulo (const GarbageCollected &rhs) const`  
*Compute the result of moduloing this value and the supplied value.*
- virtual `GarbageCollected __negative () const`  
*Compute the result of negating this value.*
- virtual `GarbageCollected __not () const`  
*Compute the logical not of this value.*
- virtual `GarbageCollected __lessThan (const GarbageCollected &rhs) const`  
*Compute the "less than" comparison.*
- virtual `GarbageCollected __equal (const GarbageCollected &rhs) const`  
*Perform an equality test.*
- virtual `GarbageCollected __period (const GarbageCollected &member, std::shared_ptr< TangBase > &tang) const`  
*Perform a member access (period) operation.*
- virtual `GarbageCollected __index (const GarbageCollected &index) const`  
*Perform an index operation.*
- virtual `GarbageCollected __slice (const GarbageCollected &begin, const GarbageCollected &end, const GarbageCollected &skip) const`  
*Perform a slice operation.*
- virtual `GarbageCollected __getIterator (const GarbageCollected &collection) const`  
*Get an iterator for the expression.*
- virtual `GarbageCollected __iteratorNext (size_t index=0) const`  
*Get the next iterative value.*
- virtual `GarbageCollected __integer () const`  
*Perform a type cast to integer.*
- virtual `GarbageCollected __float () const`  
*Perform a type cast to float.*
- virtual `GarbageCollected __boolean () const`  
*Perform a type cast to boolean.*

### 5.39.1 Detailed Description

Represents that a collection has no more values through which to iterate.

### 5.39.2 Member Function Documentation

#### 5.39.2.1 `__add()`

```
GarbageCollected ComputedExpression::__add (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of adding this value and the supplied value.

## Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to add to this.
------------	--

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.39.2.2 [\\_\\_asCode\(\)](#)**

```
string ComputedExpression::__asCode ( ) const [virtual], [inherited]
```

Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.

## Returns

A code-string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#).

**5.39.2.3 [\\_\\_assign\\_index\(\)](#)**

```
GarbageCollected ComputedExpression::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value ) [virtual], [inherited]
```

Perform an index assignment to the supplied value.

## Parameters

<i>index</i>	The index to which the value should be applied.
<i>value</i>	The value to store.

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.39.2.4 \_\_boolean()

```
GarbageCollected ComputedExpression::__boolean ( ) const [virtual], [inherited]
```

Perform a type cast to boolean.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.39.2.5 \_\_divide()

```
GarbageCollected ComputedExpression::__divide (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of dividing this value and the supplied value.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to divide this by.
------------	---

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.39.2.6 \_\_equal()

```
GarbageCollected ComputedExpression::__equal (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Perform an equality test.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionNativeLibraryFunction](#), [Tang::ComputedExpressionNativeBoundFunction](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), [Tang::ComputedExpressionCompiledFunction](#), and [Tang::ComputedExpressionBoolean](#).

### 5.39.2.7 `__float()`

```
GarbageCollected ComputedExpression::__float () const [virtual], [inherited]
```

Perform a type cast to float.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.39.2.8 `__getIterator()`

```
GarbageCollected ComputedExpression::__getIterator (
    const GarbageCollected & collection ) const [virtual], [inherited]
```

Get an iterator for the expression.

#### Parameters

<code>collection</code>	The <a href="#">GarbageCollected</a> value that will serve as the collection through which to iterate.
-------------------------	--

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.39.2.9 `__index()`

```
GarbageCollected ComputedExpression::__index (
    const GarbageCollected & index ) const [virtual], [inherited]
```

Perform an index operation.

#### Parameters

<code>index</code>	The index expression provided by the script.
--------------------	--

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.39.2.10 `__integer()`

```
GarbageCollected ComputedExpression::__integer ( ) const [virtual], [inherited]
```

Perform a type cast to integer.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.39.2.11 `__iteratorNext()`

```
GarbageCollected ComputedExpression::__iteratorNext ( size_t index = 0 ) const [virtual], [inherited]
```

Get the next iterative value.

**Parameters**

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIterator](#), and [Tang::ComputedExpressionArray](#).

### 5.39.2.12 `__lessThan()`

```
GarbageCollected ComputedExpression::__lessThan ( const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the "less than" comparison.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.39.2.13 `__modulo()`

```
GarbageCollected ComputedExpression::__modulo (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of moduloing this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to modulo this by.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionError](#).

### 5.39.2.14 `__multiply()`

```
GarbageCollected ComputedExpression::__multiply (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of multiplying this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to multiply to this.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.39.2.15 `__negative()`

```
GarbageCollected ComputedExpression::__negative ( ) const [virtual], [inherited]
```

Compute the result of negating this value.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.39.2.16 `__not()`

```
GarbageCollected ComputedExpression::__not ( ) const [virtual], [inherited]
```

Compute the logical not of this value.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.39.2.17 `__period()`

```
GarbageCollected ComputedExpression::__period (
    const GarbageCollected & member,
    std::shared_ptr< TangBase > & tang ) const [virtual], [inherited]
```

Perform a member access (period) operation.

#### Parameters

<code>member</code>	The member expression provided by the script.
---------------------	---

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionLibrary](#).

**5.39.2.18 \_\_slice()**

```
GarbageCollected ComputedExpression::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [virtual], [inherited]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

**Parameters**

<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), and [Tang::ComputedExpressionArray](#).

**5.39.2.19 \_\_string()**

```
GarbageCollected ComputedExpressionIteratorEnd::__string ( ) const [override], [virtual]
```

Perform a type cast to string.

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

**5.39.2.20 \_\_subtract()**

```
GarbageCollected ComputedExpression::__subtract (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of subtracting this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to subtract from this.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.39.2.21 dump()**

```
string ComputedExpressionIteratorEnd::dump ( ) const [override], [virtual]
```

Output the contents of the [ComputedExpression](#) as a string.

**Returns**

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

**5.39.2.22 is\_equal() [1/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const bool & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionBoolean](#).

### 5.39.2.23 `is_equal()` [2/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Error & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionError](#).

**5.39.2.24 is\_equal() [3/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::nullptr_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

**5.39.2.25 is\_equal() [4/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::string & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.39.2.26 is\_equal() [5/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::float_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

val	The value to compare against.
-----	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

### 5.39.2.27 is\_equal() [6/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::integer_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

val	The value to compare against.
-----	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

### 5.39.2.28 isCopyNeeded()

```
bool ComputedExpression::isCopyNeeded ( ) const [virtual], [inherited]
```

Determine whether or not a copy is needed.

Copying is only required for ComputedExpressions which serve as containers, such as [ComputedExpressionArray](#) and [ComputedExpressionObject](#).

#### Returns

Whether or not a copy is needed.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.39.2.29 `makeCopy()`

```
GarbageCollected ComputedExpression::makeCopy ( ) const [virtual], [inherited]
```

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

#### Returns

A [Tang::GarbageCollected](#) value for the new [ComputedExpression](#).

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionNativeLibraryFunction](#), [Tang::ComputedExpressionNativeBoundFunction](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionLibraryBase](#), [Tang::ComputedExpressionLibrary](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), [Tang::ComputedExpressionCompiledFunction](#), [Tang::ComputedExpressionBoolean](#), and [Tang::ComputedExpressionArray](#).

The documentation for this class was generated from the following files:


- [include/computedExpressionIteratorEnd.hpp](#)
- [src/computedExpressionIteratorEnd.cpp](#)

## 5.40 `Tang::ComputedExpressionLibrary` Class Reference


Represents a Runtime Library.

```
#include <computedExpressionLibrary.hpp>
```

Inheritance diagram for `Tang::ComputedExpressionLibrary`:

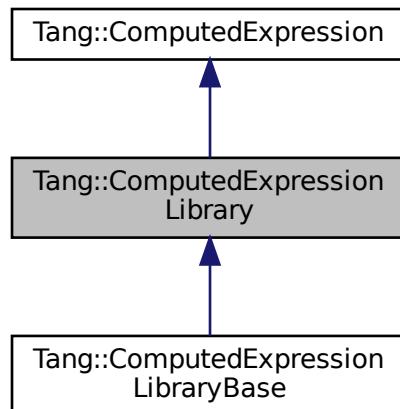

Collaboration diagram for Tang::ComputedExpressionLibrary:

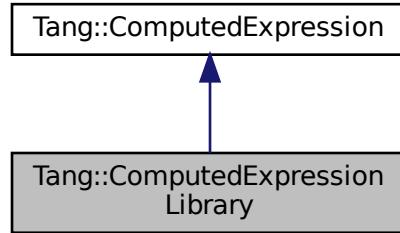

## Public Member Functions

- **ComputedExpressionLibrary ()**  
*Construct a Runtime Library.*
- **virtual std::string dump () const override**  
*Output the contents of the [ComputedExpression](#) as a string.*
- **GarbageCollected makeCopy () const override**  
*Make a copy of the [ComputedExpression](#) (recursively, if appropriate).*
- **GarbageCollected \_\_period (const GarbageCollected &member, std::shared\_ptr< TangBase > &tang) const override**  
*Perform a member access (period) operation.*
- **virtual std::string \_\_asCode () const**  
*Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.*
- **virtual bool isCopyNeeded () const**  
*Determine whether or not a copy is needed.*
- **virtual bool is\_equal (const Tang::integer\_t &val) const**  
*Check whether or not the computed expression is equal to another value.*
- **virtual bool is\_equal (const Tang::float\_t &val) const**  
*Check whether or not the computed expression is equal to another value.*
- **virtual bool is\_equal (const bool &val) const**  
*Check whether or not the computed expression is equal to another value.*
- **virtual bool is\_equal (const std::string &val) const**  
*Check whether or not the computed expression is equal to another value.*
- **virtual bool is\_equal (const Error &val) const**  
*Check whether or not the computed expression is equal to another value.*
- **virtual bool is\_equal (const std::nullptr\_t &val) const**  
*Check whether or not the computed expression is equal to another value.*
- **virtual GarbageCollected \_\_assign\_index (const GarbageCollected &index, const GarbageCollected &value) const**  
*Perform an index assignment to the supplied value.*
- **virtual GarbageCollected \_\_add (const GarbageCollected &rhs) const**  
*Compute the result of adding this value and the supplied value.*
- **virtual GarbageCollected \_\_subtract (const GarbageCollected &rhs) const**  
*Compute the result of subtracting this value and the supplied value.*
- **virtual GarbageCollected \_\_multiply (const GarbageCollected &rhs) const**

- virtual `GarbageCollected __divide` (const `GarbageCollected &rhs`) const
 

*Compute the result of dividing this value and the supplied value.*
- virtual `GarbageCollected __modulo` (const `GarbageCollected &rhs`) const
 

*Compute the result of moduloing this value and the supplied value.*
- virtual `GarbageCollected __negative` () const
 

*Compute the result of negating this value.*
- virtual `GarbageCollected __not` () const
 

*Compute the logical not of this value.*
- virtual `GarbageCollected __lessThan` (const `GarbageCollected &rhs`) const
 

*Compute the "less than" comparison.*
- virtual `GarbageCollected __equal` (const `GarbageCollected &rhs`) const
 

*Perform an equality test.*
- virtual `GarbageCollected __index` (const `GarbageCollected &index`) const
 

*Perform an index operation.*
- virtual `GarbageCollected __slice` (const `GarbageCollected &begin`, const `GarbageCollected &end`, const `GarbageCollected &skip`) const
 

*Perform a slice operation.*
- virtual `GarbageCollected __getIterator` (const `GarbageCollected &collection`) const
 

*Get an iterator for the expression.*
- virtual `GarbageCollected __iteratorNext` (size\_t index=0) const
 

*Get the next iterative value.*
- virtual `GarbageCollected __integer` () const
 

*Perform a type cast to integer.*
- virtual `GarbageCollected __float` () const
 

*Perform a type cast to float.*
- virtual `GarbageCollected __boolean` () const
 

*Perform a type cast to boolean.*
- virtual `GarbageCollected __string` () const
 

*Perform a type cast to string.*

### 5.40.1 Detailed Description

Represents a Runtime Library.

### 5.40.2 Member Function Documentation

#### 5.40.2.1 `__add()`

```
GarbageCollected ComputedExpression::__add (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of adding this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to add to this.
------------	--

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.40.2.2 [\\_\\_asCode\(\)](#)**

```
string ComputedExpression::__asCode ( ) const [virtual], [inherited]
```

Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.

**Returns**

A code-string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#).

**5.40.2.3 [\\_\\_assign\\_index\(\)](#)**

```
GarbageCollected ComputedExpression::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value ) [virtual], [inherited]
```

Perform an index assignment to the supplied value.

**Parameters**

<i>index</i>	The index to which the value should be applied.
<i>value</i>	The value to store.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

#### 5.40.2.4 `__boolean()`

```
GarbageCollected ComputedExpression::__boolean ( ) const [virtual], [inherited]
```

Perform a type cast to boolean.

##### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

#### 5.40.2.5 `__divide()`

```
GarbageCollected ComputedExpression::__divide (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of dividing this value and the supplied value.

##### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to divide this by.
------------	---

##### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

#### 5.40.2.6 `__equal()`

```
GarbageCollected ComputedExpression::__equal (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Perform an equality test.

##### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

##### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionNativeLibraryFunction](#), [Tang::ComputedExpressionNativeBoundFunction](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), [Tang::ComputedExpressionCompiledFunction](#), and [Tang::ComputedExpressionBoolean](#).

### 5.40.2.7 `__float()`

`GarbageCollected` `ComputedExpression::__float () const [virtual], [inherited]`

Perform a type cast to float.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.40.2.8 `__getIterator()`

`GarbageCollected` `ComputedExpression::__getIterator (`  
`const GarbageCollected & collection ) const [virtual], [inherited]`

Get an iterator for the expression.

#### Parameters

<code>collection</code>	The <code>GarbageCollected</code> value that will serve as the collection through which to iterate.
-------------------------	---

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.40.2.9 `__index()`

`GarbageCollected` `ComputedExpression::__index (`  
`const GarbageCollected & index ) const [virtual], [inherited]`

Perform an index operation.

#### Parameters

<code>index</code>	The index expression provided by the script.
--------------------	--

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

#### 5.40.2.10 `__integer()`

```
GarbageCollected ComputedExpression::__integer ( ) const [virtual], [inherited]
```

Perform a type cast to integer.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

#### 5.40.2.11 `__iteratorNext()`

```
GarbageCollected ComputedExpression::__iteratorNext ( size_t index = 0 ) const [virtual], [inherited]
```

Get the next iterative value.

**Parameters**

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIterator](#), and [Tang::ComputedExpressionArray](#).

#### 5.40.2.12 `__lessThan()`

```
GarbageCollected ComputedExpression::__lessThan ( const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the "less than" comparison.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.40.2.13 `__modulo()`

```
GarbageCollected ComputedExpression::__modulo (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of moduloing this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to modulo this by.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionError](#).

### 5.40.2.14 `__multiply()`

```
GarbageCollected ComputedExpression::__multiply (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of multiplying this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to multiply to this.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.40.2.15 `__negative()`

```
GarbageCollected ComputedExpression::__negative ( ) const [virtual], [inherited]
```

Compute the result of negating this value.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.40.2.16 `__not()`

```
GarbageCollected ComputedExpression::__not ( ) const [virtual], [inherited]
```

Compute the logical not of this value.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.40.2.17 `__period()`

```
GarbageCollected ComputedExpressionLibrary::__period ( 
    const GarbageCollected & member,
    std::shared_ptr< TangBase > & tang ) const [override], [virtual]
```

Perform a member access (period) operation.

#### Parameters

<code>member</code>	The member expression provided by the script.
---------------------	---

#### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

**5.40.2.18 \_\_slice()**

```
GarbageCollected ComputedExpression::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [virtual], [inherited]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

**Parameters**

<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), and [Tang::ComputedExpressionArray](#).

**5.40.2.19 \_\_string()**

```
GarbageCollected ComputedExpression::__string () const [virtual], [inherited]
```

Perform a type cast to string.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIteratorEnd](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionArray](#).

**5.40.2.20 \_\_subtract()**

```
GarbageCollected ComputedExpression::__subtract (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of subtracting this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to subtract from this.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.40.2.21 dump()**

```
std::string ComputedExpressionLibrary::dump ( ) const [override], [virtual]
```

Output the contents of the [ComputedExpression](#) as a string.

**Returns**

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

**5.40.2.22 is\_equal() [1/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const bool & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionBoolean](#).

### 5.40.2.23 `is_equal()` [2/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Error & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionError](#).

**5.40.2.24 is\_equal() [3/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::nullptr_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

**5.40.2.25 is\_equal() [4/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::string & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.40.2.26 is\_equal() [5/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::float_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

val	The value to compare against.
-----	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

### 5.40.2.27 is\_equal() [6/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::integer_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

val	The value to compare against.
-----	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

### 5.40.2.28 isCopyNeeded()

```
bool ComputedExpression::isCopyNeeded ( ) const [virtual], [inherited]
```

Determine whether or not a copy is needed.

Copying is only required for ComputedExpressions which serve as containers, such as [ComputedExpressionArray](#) and [ComputedExpressionObject](#).

#### Returns

Whether or not a copy is needed.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.40.2.29 `makeCopy()`

`GarbageCollected` `ComputedExpressionLibrary::makeCopy ( ) const [override], [virtual]`

Make a copy of the `ComputedExpression` (recursively, if appropriate).

#### Returns

A `Tang::GarbageCollected` value for the new `ComputedExpression`.

Reimplemented from `Tang::ComputedExpression`.


Reimplemented in `Tang::ComputedExpressionLibraryBase`.

The documentation for this class was generated from the following files:


- `include/computedExpressionLibrary.hpp`
- `src/computedExpressionLibrary.cpp`

## 5.41 `Tang::ComputedExpressionLibraryBase` Class Reference

Inheritance diagram for `Tang::ComputedExpressionLibraryBase`:

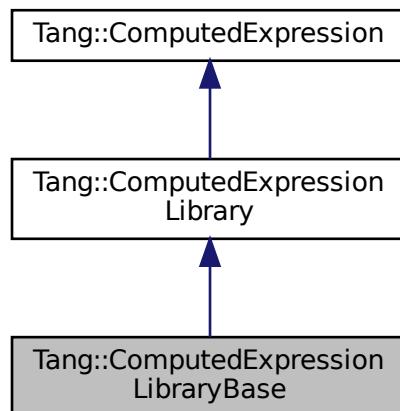

Collaboration diagram for Tang::ComputedExpressionLibraryBase:

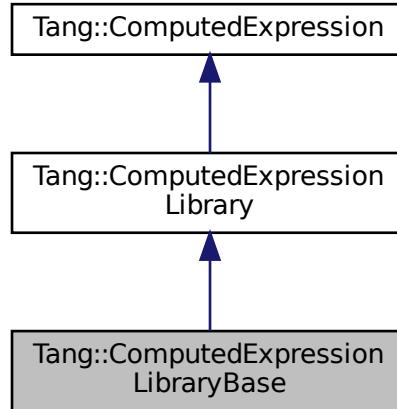

## Public Member Functions

- `GarbageCollected makeCopy () const override`  
*Make a copy of the [ComputedExpression](#) (recursively, if appropriate).*
- `virtual std::string dump () const override`  
*Output the contents of the [ComputedExpression](#) as a string.*
- `GarbageCollected __period (const GarbageCollected &member, std::shared_ptr< TangBase > &tang) const override`  
*Perform a member access (period) operation.*
- `virtual std::string __asCode () const`  
*Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.*
- `virtual bool isCopyNeeded () const`  
*Determine whether or not a copy is needed.*
- `virtual bool is_equal (const Tang::integer_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const Tang::float_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const bool &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const std::string &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const Error &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const std::nullptr_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual GarbageCollected __assign_index (const GarbageCollected &index, const GarbageCollected &value)`  
*Perform an index assignment to the supplied value.*
- `virtual GarbageCollected __add (const GarbageCollected &rhs) const`  
*Compute the result of adding this value and the supplied value.*

- virtual `GarbageCollected __subtract` (const `GarbageCollected &rhs`) const  
*Compute the result of subtracting this value and the supplied value.*
- virtual `GarbageCollected __multiply` (const `GarbageCollected &rhs`) const  
*Compute the result of multiplying this value and the supplied value.*
- virtual `GarbageCollected __divide` (const `GarbageCollected &rhs`) const  
*Compute the result of dividing this value and the supplied value.*
- virtual `GarbageCollected __modulo` (const `GarbageCollected &rhs`) const  
*Compute the result of moduloing this value and the supplied value.*
- virtual `GarbageCollected __negative` () const  
*Compute the result of negating this value.*
- virtual `GarbageCollected __not` () const  
*Compute the logical not of this value.*
- virtual `GarbageCollected __lessThan` (const `GarbageCollected &rhs`) const  
*Compute the "less than" comparison.*
- virtual `GarbageCollected __equal` (const `GarbageCollected &rhs`) const  
*Perform an equality test.*
- virtual `GarbageCollected __index` (const `GarbageCollected &index`) const  
*Perform an index operation.*
- virtual `GarbageCollected __slice` (const `GarbageCollected &begin`, const `GarbageCollected &end`, const `GarbageCollected &skip`) const  
*Perform a slice operation.*
- virtual `GarbageCollected __getIterator` (const `GarbageCollected &collection`) const  
*Get an iterator for the expression.*
- virtual `GarbageCollected __iteratorNext` (size\_t index=0) const  
*Get the next iterative value.*
- virtual `GarbageCollected __integer` () const  
*Perform a type cast to integer.*
- virtual `GarbageCollected __float` () const  
*Perform a type cast to float.*
- virtual `GarbageCollected __boolean` () const  
*Perform a type cast to boolean.*
- virtual `GarbageCollected __string` () const  
*Perform a type cast to string.*

## Static Public Member Functions

- static `LibraryFunctionMap getLibraryAttributes` ()

### 5.41.1 Member Function Documentation

#### 5.41.1.1 \_\_add()

```
GarbageCollected ComputedExpression::__add (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of adding this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to add to this.
------------	--

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.41.1.2 [\\_\\_asCode\(\)](#)

```
string ComputedExpression::__asCode ( ) const [virtual], [inherited]
```

Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.

**Returns**

A code-string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.41.1.3 [\\_\\_assign\\_index\(\)](#)

```
GarbageCollected ComputedExpression::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value ) [virtual], [inherited]
```

Perform an index assignment to the supplied value.

**Parameters**

<i>index</i>	The index to which the value should be applied.
<i>value</i>	The value to store.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

#### 5.41.1.4 `__boolean()`

```
GarbageCollected ComputedExpression::__boolean ( ) const [virtual], [inherited]
```

Perform a type cast to boolean.

##### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

#### 5.41.1.5 `__divide()`

```
GarbageCollected ComputedExpression::__divide (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of dividing this value and the supplied value.

##### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to divide this by.
------------	---

##### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

#### 5.41.1.6 `__equal()`

```
GarbageCollected ComputedExpression::__equal (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Perform an equality test.

##### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

##### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionNativeLibraryFunction](#), [Tang::ComputedExpressionNativeBoundFunction](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), [Tang::ComputedExpressionCompiledFunction](#), and [Tang::ComputedExpressionBoolean](#).

### 5.41.1.7 `__float()`

`GarbageCollected` `ComputedExpression::__float () const [virtual], [inherited]`

Perform a type cast to float.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.41.1.8 `__getIterator()`

`GarbageCollected` `ComputedExpression::__getIterator (`  
`const GarbageCollected & collection ) const [virtual], [inherited]`

Get an iterator for the expression.

#### Parameters

<code>collection</code>	The <code>GarbageCollected</code> value that will serve as the collection through which to iterate.
-------------------------	---

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.41.1.9 `__index()`

`GarbageCollected` `ComputedExpression::__index (`  
`const GarbageCollected & index ) const [virtual], [inherited]`

Perform an index operation.

#### Parameters

<code>index</code>	The index expression provided by the script.
--------------------	--

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

**5.41.1.10 \_\_integer()**

```
GarbageCollected ComputedExpression::__integer ( ) const [virtual], [inherited]
```

Perform a type cast to integer.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

**5.41.1.11 \_\_iteratorNext()**

```
GarbageCollected ComputedExpression::__iteratorNext ( size_t index = 0 ) const [virtual], [inherited]
```

Get the next iterative value.

**Parameters**

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIterator](#), and [Tang::ComputedExpressionArray](#).

**5.41.1.12 \_\_lessThan()**

```
GarbageCollected ComputedExpression::__lessThan ( const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the "less than" comparison.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.41.1.13 `__modulo()`

```
GarbageCollected ComputedExpression::__modulo (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of moduloing this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to modulo this by.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionError](#).

### 5.41.1.14 `__multiply()`

```
GarbageCollected ComputedExpression::__multiply (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of multiplying this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to multiply to this.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.41.1.15 `__negative()`

```
GarbageCollected ComputedExpression::__negative ( ) const [virtual], [inherited]
```

Compute the result of negating this value.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.41.1.16 `__not()`

```
GarbageCollected ComputedExpression::__not ( ) const [virtual], [inherited]
```

Compute the logical not of this value.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.41.1.17 `__period()`

```
GarbageCollected ComputedExpressionLibrary::__period ( 
    const GarbageCollected & member,
    std::shared_ptr< TangBase > & tang ) const [override], [virtual], [inherited]
```

Perform a member access (period) operation.

#### Parameters

<code>member</code>	The member expression provided by the script.
---------------------	---

#### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

**5.41.1.18 \_\_slice()**

```
GarbageCollected ComputedExpression::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [virtual], [inherited]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

**Parameters**

<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), and [Tang::ComputedExpressionArray](#).

**5.41.1.19 \_\_string()**

```
GarbageCollected ComputedExpression::__string () const [virtual], [inherited]
```

Perform a type cast to string.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIteratorEnd](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionArray](#).

**5.41.1.20 \_\_subtract()**

```
GarbageCollected ComputedExpression::__subtract (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of subtracting this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to subtract from this.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.41.1.21 dump()**

```
std::string ComputedExpressionLibrary::dump ( ) const [override], [virtual], [inherited]
```

Output the contents of the [ComputedExpression](#) as a string.

**Returns**

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

**5.41.1.22 is\_equal() [1/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const bool & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionBoolean](#).

### 5.41.1.23 `is_equal()` [2/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Error & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionError](#).

**5.41.1.24 is\_equal() [3/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::nullptr_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

**5.41.1.25 is\_equal() [4/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::string & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.41.1.26 is\_equal() [5/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::float_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

val	The value to compare against.
-----	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

### 5.41.1.27 is\_equal() [6/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::integer_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

val	The value to compare against.
-----	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

### 5.41.1.28 isCopyNeeded()

```
bool ComputedExpression::isCopyNeeded ( ) const [virtual], [inherited]
```

Determine whether or not a copy is needed.

Copying is only required for ComputedExpressions which serve as containers, such as [ComputedExpressionArray](#) and [ComputedExpressionObject](#).

#### Returns

Whether or not a copy is needed.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.41.1.29 `makeCopy()`

```
GarbageCollected Tang::ComputedExpressionLibraryBase::makeCopy ( ) const [inline], [override], [virtual]
```

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

#### Returns

A [Tang::GarbageCollected](#) value for the new [ComputedExpression](#).

Reimplemented from [Tang::ComputedExpressionLibrary](#).

The documentation for this class was generated from the following file:


- `include/computedExpressionLibraryBase.hpp`

## 5.42 `Tang::ComputedExpressionMap` Class Reference


Represents an Map that is the result of a computation.

```
#include <computedExpressionMap.hpp>
```

Inheritance diagram for `Tang::ComputedExpressionMap`:

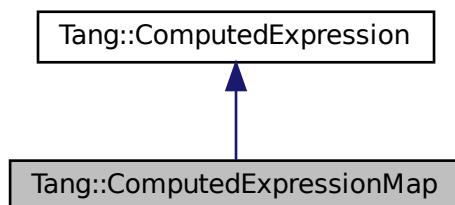

Collaboration diagram for Tang::ComputedExpressionMap:

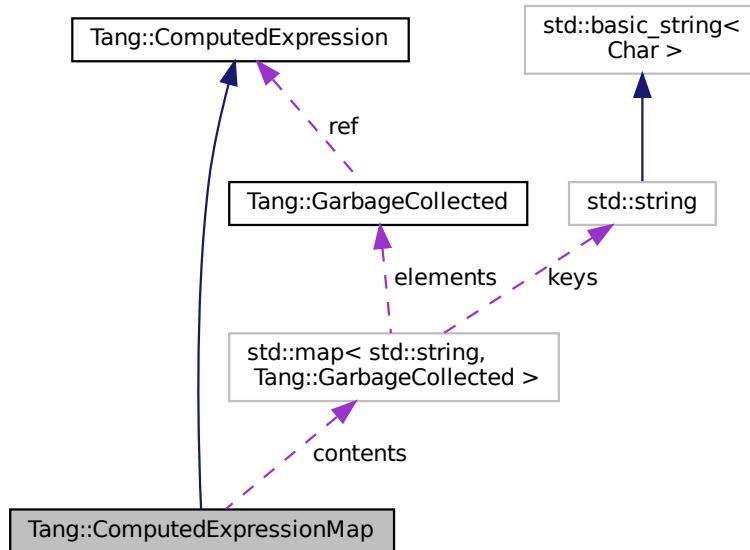

## Public Member Functions

- [ComputedExpressionMap \(std::map< std::string, Tang::GarbageCollected > contents\)](#)  
*Construct an Map result.*
- [virtual std::string dump \(\) const override](#)  
*Output the contents of the [ComputedExpression](#) as a string.*
- [virtual bool isCopyNeeded \(\) const override](#)  
*Determine whether or not a copy is needed.*
- [GarbageCollected makeCopy \(\) const override](#)  
*Make a copy of the [ComputedExpression](#) (recursively, if appropriate).*
- [virtual GarbageCollected \\_\\_index \(const GarbageCollected &index\) const override](#)  
*Perform an index operation.*
- [virtual GarbageCollected \\_\\_getIterator \(const GarbageCollected &collection\) const override](#)  
*Get an iterator for the expression.*
- [virtual GarbageCollected \\_\\_iteratorNext \(size\\_t index\) const override](#)  
*Get the next iterative value.*
- [virtual GarbageCollected \\_\\_assign\\_index \(const GarbageCollected &index, const GarbageCollected &value\) const override](#)  
*Perform an index assignment to the supplied value.*
- [virtual GarbageCollected \\_\\_string \(\) const override](#)  
*Perform a type cast to string.*
- [virtual GarbageCollected \\_\\_boolean \(\) const override](#)  
*Perform a type cast to boolean.*
- [virtual std::string \\_\\_asCode \(\) const](#)  
*Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.*
- [virtual bool is\\_equal \(const Tang::integer\\_t &val\) const](#)

- virtual bool `is_equal` (const `Tang::float_t` &val) const
 

*Check whether or not the computed expression is equal to another value.*
- virtual bool `is_equal` (const bool &val) const
 

*Check whether or not the computed expression is equal to another value.*
- virtual bool `is_equal` (const std::string &val) const
 

*Check whether or not the computed expression is equal to another value.*
- virtual bool `is_equal` (const `Error` &val) const
 

*Check whether or not the computed expression is equal to another value.*
- virtual bool `is_equal` (const std::nullptr\_t &val) const
 

*Check whether or not the computed expression is equal to another value.*
- virtual `GarbageCollected __add` (const `GarbageCollected` &rhs) const
 

*Compute the result of adding this value and the supplied value.*
- virtual `GarbageCollected __subtract` (const `GarbageCollected` &rhs) const
 

*Compute the result of subtracting this value and the supplied value.*
- virtual `GarbageCollected __multiply` (const `GarbageCollected` &rhs) const
 

*Compute the result of multiplying this value and the supplied value.*
- virtual `GarbageCollected __divide` (const `GarbageCollected` &rhs) const
 

*Compute the result of dividing this value and the supplied value.*
- virtual `GarbageCollected __modulo` (const `GarbageCollected` &rhs) const
 

*Compute the result of moduloing this value and the supplied value.*
- virtual `GarbageCollected __negative` () const
 

*Compute the result of negating this value.*
- virtual `GarbageCollected __not` () const
 

*Compute the logical not of this value.*
- virtual `GarbageCollected __lessThan` (const `GarbageCollected` &rhs) const
 

*Compute the "less than" comparison.*
- virtual `GarbageCollected __equal` (const `GarbageCollected` &rhs) const
 

*Perform an equality test.*
- virtual `GarbageCollected __period` (const `GarbageCollected` &member, std::shared\_ptr< `TangBase` > &tang) const
 

*Perform a member access (period) operation.*
- virtual `GarbageCollected __slice` (const `GarbageCollected` &begin, const `GarbageCollected` &end, const `GarbageCollected` &skip) const
 

*Perform a slice operation.*
- virtual `GarbageCollected __integer` () const
 

*Perform a type cast to integer.*
- virtual `GarbageCollected __float` () const
 

*Perform a type cast to float.*

## Private Attributes

- std::map< std::string, `Tang::GarbageCollected` > `contents`

*The map contents.*

### 5.42.1 Detailed Description

Represents an Map that is the result of a computation.

## 5.42.2 Constructor & Destructor Documentation

### 5.42.2.1 ComputedExpressionMap()

```
ComputedExpressionMap::ComputedExpressionMap (   
    std::map< std::string, Tang::GarbageCollected > contents )
```

Construct an Map result.

#### Parameters

<i>contents</i>	The map of key value pairs.
-----------------	-----------------------------

## 5.42.3 Member Function Documentation

### 5.42.3.1 \_\_add()

```
GarbageCollected ComputedExpression::__add (   
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of adding this value and the supplied value.

#### Parameters

<i>rhs</i>	The <b>GarbageCollected</b> value to add to this.
------------	---

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.42.3.2 \_\_asCode()

```
string ComputedExpression::__asCode ( ) const [virtual], [inherited]
```

Output the contents of the **ComputedExpression** as a string similar to how it would be represented as code.

#### Returns

A code-string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.42.3.3 \_\_assign\_index()

```
GarbageCollected ComputedExpressionMap::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value )  [override], [virtual]
```

Perform an index assignment to the supplied value.

#### Parameters


<i>index</i>	The index to which the value should be applied.
<i>value</i>	The value to store.

#### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

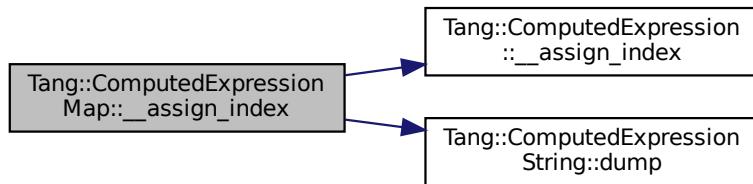

### 5.42.3.4 \_\_boolean()

```
GarbageCollected ComputedExpressionMap::__boolean ( ) const [override], [virtual]
```

Perform a type cast to boolean.

#### Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.42.3.5 \_\_divide()

```
GarbageCollected ComputedExpression::__divide (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of dividing this value and the supplied value.

**Parameters**

<code>rhs</code>	The <a href="#">GarbageCollected</a> value to divide this by.
------------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.42.3.6 `__equal()`

```
GarbageCollected ComputedExpression::__equal (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Perform an equality test.

**Parameters**

<code>rhs</code>	The <a href="#">GarbageCollected</a> value to compare against.
------------------	--

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionNativeLibraryFunction](#), [Tang::ComputedExpressionNativeBoundFunction](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), [Tang::ComputedExpressionCompiledFunction](#), and [Tang::ComputedExpressionBoolean](#).

### 5.42.3.7 `__float()`

```
GarbageCollected ComputedExpression::__float () const [virtual], [inherited]
```

Perform a type cast to float.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.42.3.8 `__getIterator()`

```
GarbageCollected ComputedExpressionMap::__getIterator (
    const GarbageCollected & collection ) const [override], [virtual]
```

Get an iterator for the expression.

## Parameters

<i>collection</i>	The <a href="#">GarbageCollected</a> value that will serve as the collection through which to iterate.
-------------------	--

Reimplemented from [Tang::ComputedExpression](#).

### 5.42.3.9 `__index()`

```
GarbageCollected ComputedExpressionMap::__index (
    const GarbageCollected & index ) const [override], [virtual]
```

Perform an index operation.

## Parameters


<i>index</i>	The index expression provided by the script.
--------------	--

## Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

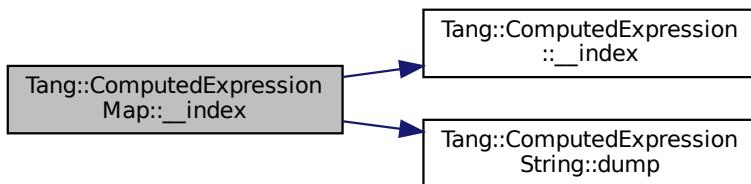

### 5.42.3.10 `__integer()`

```
GarbageCollected ComputedExpression::__integer ( ) const [virtual], [inherited]
```

Perform a type cast to integer.

## Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.42.3.11 `__iteratorNext()`

```
GarbageCollected ComputedExpressionMap::__iteratorNext (
    size_t index ) const [override], [virtual]
```

Get the next iterative value.

#### Parameters

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented from [Tang::ComputedExpression](#).

### 5.42.3.12 `__lessThan()`

```
GarbageCollected ComputedExpression::__lessThan (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the "less than" comparison.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.42.3.13 `__modulo()`

```
GarbageCollected ComputedExpression::__modulo (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of moduloing this value and the supplied value.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to modulo this by.
------------	---

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionError](#).

#### 5.42.3.14 `__multiply()`

```
GarbageCollected ComputedExpression::__multiply (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of multiplying this value and the supplied value.

##### Parameters

<code>rhs</code>	The <a href="#">GarbageCollected</a> value to multiply to this.
------------------	---

##### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

#### 5.42.3.15 `__negative()`

```
GarbageCollected ComputedExpression::__negative ( ) const [virtual], [inherited]
```

Compute the result of negating this value.

##### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

#### 5.42.3.16 `__not()`

```
GarbageCollected ComputedExpression::__not ( ) const [virtual], [inherited]
```

Compute the logical not of this value.

##### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

#### 5.42.3.17 `__period()`

```
GarbageCollected ComputedExpression::__period (
    const GarbageCollected & member,
    std::shared_ptr< TangBase > & tang ) const [virtual], [inherited]
```

Perform a member access (period) operation.

## Parameters

<i>member</i>	The member expression provided by the script.
---------------	---

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionLibrary](#).

**5.42.3.18 \_\_slice()**

```
GarbageCollected ComputedExpression::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [virtual], [inherited]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

## Parameters

<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), and [Tang::ComputedExpressionArray](#).

**5.42.3.19 \_\_string()**

```
GarbageCollected ComputedExpressionMap::__string ( ) const [override], [virtual]
```


Perform a type cast to string.

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

**5.42.3.20 \_\_subtract()**

```
GarbageCollected ComputedExpression::__subtract (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of subtracting this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to subtract from this.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.42.3.21 dump()**

```
string ComputedExpressionMap::dump ( ) const [override], [virtual]
```

Output the contents of the [ComputedExpression](#) as a string.

**Returns**

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

### 5.42.3.22 `is_equal()` [1/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const bool & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionBoolean](#).

### 5.42.3.23 `is_equal()` [2/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Error & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionError](#).

### 5.42.3.24 `is_equal()` [3/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::nullptr_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

**Returns**

True if equal, false if not.

**5.42.3.25 is\_equal() [4/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::string & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#).

**5.42.3.26 is\_equal() [5/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::float_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.42.3.27 is\_equal() [6/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::integer_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.42.3.28 isCopyNeeded()**

```
bool ComputedExpressionMap::isCopyNeeded ( ) const [override], [virtual]
```

Determine whether or not a copy is needed.

Copying is only required for ComputedExpressions which serve as containers, such as [ComputedExpressionArray](#) and [ComputedExpressionObject](#).

**Returns**

Whether or not a copy is needed.

Reimplemented from [Tang::ComputedExpression](#).

**5.42.3.29 makeCopy()**

```
GarbageCollected ComputedExpressionMap::makeCopy ( ) const [override], [virtual]
```

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

**Returns**

A [Tang::GarbageCollected](#) value for the new [ComputedExpression](#).

Reimplemented from [Tang::ComputedExpression](#).

The documentation for this class was generated from the following files:


- [include/computedExpressionMap.hpp](#)
- [src/computedExpressionMap.cpp](#)

## 5.43 Tang::ComputedExpressionNativeBoundFunction Class Reference


Represents a NativeBound Function declared in the script.

```
#include <computedExpressionNativeBoundFunction.hpp>
```

Inheritance diagram for Tang::ComputedExpressionNativeBoundFunction:

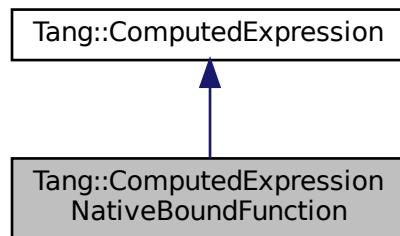

Collaboration diagram for Tang::ComputedExpressionNativeBoundFunction:

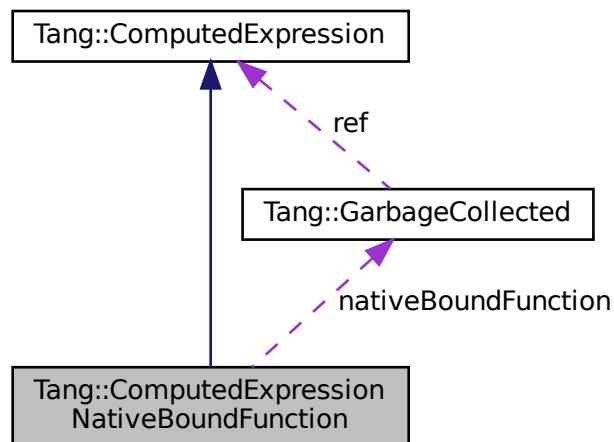

### Public Member Functions

- [ComputedExpressionNativeBoundFunction](#) (NativeBoundFunction nativeBoundFunction, size\_t argc, std::type\_index targetTypeIndex)  
*Construct an NativeBoundFunction.*
- virtual std::string [dump](#) () const override

- **Output the contents of the `ComputedExpression` as a string.**
  - **GarbageCollected `makeCopy` () const override**
    - Make a copy of the `ComputedExpression` (recursively, if appropriate).*
  - **virtual GarbageCollected `__equal` (const GarbageCollected &rhs) const override**
    - Perform an equality test.*
  - **NativeBoundFunction `getFunction` () const**
    - Get the native bound function to be executed.*
  - **size\_t `getArgc` () const**
    - Get the count of arguments that this function expects.*
  - **const std::type\_index & `getTargetTypeIndex` () const**
    - Get the type of the value to which the function is bound.*
  - **virtual std::string `__asCode` () const**
    - Output the contents of the `ComputedExpression` as a string similar to how it would be represented as code.*
  - **virtual bool `isCopyNeeded` () const**
    - Determine whether or not a copy is needed.*
  - **virtual bool `is_equal` (const Tang::integer\_t &val) const**
    - Check whether or not the computed expression is equal to another value.*
  - **virtual bool `is_equal` (const Tang::float\_t &val) const**
    - Check whether or not the computed expression is equal to another value.*
  - **virtual bool `is_equal` (const bool &val) const**
    - Check whether or not the computed expression is equal to another value.*
  - **virtual bool `is_equal` (const std::string &val) const**
    - Check whether or not the computed expression is equal to another value.*
  - **virtual bool `is_equal` (const Error &val) const**
    - Check whether or not the computed expression is equal to another value.*
  - **virtual bool `is_equal` (const std::nullptr\_t &val) const**
    - Check whether or not the computed expression is equal to another value.*
  - **virtual GarbageCollected `__assign_index` (const GarbageCollected &index, const GarbageCollected &value) const**
    - Perform an index assignment to the supplied value.*
  - **virtual GarbageCollected `__add` (const GarbageCollected &rhs) const**
    - Compute the result of adding this value and the supplied value.*
  - **virtual GarbageCollected `__subtract` (const GarbageCollected &rhs) const**
    - Compute the result of subtracting this value and the supplied value.*
  - **virtual GarbageCollected `__multiply` (const GarbageCollected &rhs) const**
    - Compute the result of multiplying this value and the supplied value.*
  - **virtual GarbageCollected `__divide` (const GarbageCollected &rhs) const**
    - Compute the result of dividing this value and the supplied value.*
  - **virtual GarbageCollected `__modulo` (const GarbageCollected &rhs) const**
    - Compute the result of moduloing this value and the supplied value.*
  - **virtual GarbageCollected `__negative` () const**
    - Compute the result of negating this value.*
  - **virtual GarbageCollected `__not` () const**
    - Compute the logical not of this value.*
  - **virtual GarbageCollected `__lessThan` (const GarbageCollected &rhs) const**
    - Compute the "less than" comparison.*
  - **virtual GarbageCollected `__period` (const GarbageCollected &member, std::shared\_ptr<TangBase> &tang) const**
    - Perform a member access (period) operation.*
  - **virtual GarbageCollected `__index` (const GarbageCollected &index) const**
    - Perform an index operation.*

- virtual `GarbageCollected __slice` (const `GarbageCollected` &begin, const `GarbageCollected` &end, const `GarbageCollected` &skip) const  
*Perform a slice operation.*
- virtual `GarbageCollected __getIterator` (const `GarbageCollected` &collection) const  
*Get an iterator for the expression.*
- virtual `GarbageCollected __iteratorNext` (size\_t index=0) const  
*Get the next iterative value.*
- virtual `GarbageCollected __integer` () const  
*Perform a type cast to integer.*
- virtual `GarbageCollected __float` () const  
*Perform a type cast to float.*
- virtual `GarbageCollected __boolean` () const  
*Perform a type cast to boolean.*
- virtual `GarbageCollected __string` () const  
*Perform a type cast to string.*

## Public Attributes

- `std::optional<GarbageCollected> target`  
*The target object that the function is bound to.*

## Private Attributes

- `NativeBoundFunction nativeBoundFunction`  
*The native bound function to be executed.*
- `size_t argc`  
*The count of arguments that this function expects.*
- `std::type_index targetTypeIndex`  
*The type of the value to which the function is bound.*

### 5.43.1 Detailed Description

Represents a NativeBound Function declared in the script.

### 5.43.2 Constructor & Destructor Documentation

### 5.43.2.1 ComputedExpressionNativeBoundFunction()

```
ComputedExpressionNativeBoundFunction::ComputedExpressionNativeBoundFunction (
    NativeBoundFunction nativeBoundFunction,
    size_t argc,
    std::type_index targetTypeIndex )
```

Construct an NativeBoundFunction.

The object itself is designed to be safe in that, once it is constructed, the method function pointer, argument count, and target type cannot be changed, but can only be accessible through a getter.

The target value that the function is bound to, however, cannot be set when the object is created, due to the design of the compiler. It is therefore exposed, regardless of being made public or via a setter function.

The current design of the VM will set the correct target, but because the target is exposed, it is possible that some bad actor could modify it. It is therefore necessary to verify that the type of the bound object and the type that was known when this object is created are, in fact, the same. That is why we store the target object type information and protect it behind a getter function.

When the VM executes the bound method, it will perform a type check to verify that the bound object is of the same type as that of the method that is defined in [TangBase::getObjectMethods\(\)](#).

It should be safe, then, to assume that within a NativeBoundFunction, the type is the expected type. No [ComputedExpression](#) type, then, should "steal" a NativeBoundFunction from another [ComputedExpression](#) definition, as it is assumed that the bound target that is provided to any NativeBoundFunction is the same as the type on which it was originally defined.

For example, a NativeBoundFunction declared in [ComputedExpressionString](#) may assume that the bound target is also a [ComputedExpressionString](#). If another class, such as [ComputedExpressionArray](#), were to try to copy the NativeBoundFunction (as a pointer reference), the function will still expect that the bound target is a [ComputedExpressionString](#), and will probably cause a segmentation fault. Just don't do it.

#### Parameters

<i>nativeBoundFunction</i>	The native bound function to be executed.
<i>argc</i>	The count of arguments that this function expects.
<i>targetTypeIndex</i>	The type of the value to which the function is bound.

### 5.43.3 Member Function Documentation

#### 5.43.3.1 \_\_add()

```
GarbageCollected ComputedExpression::__add (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of adding this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to add to this.
------------	--

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.43.3.2 [\\_\\_asCode\(\)](#)**

```
string ComputedExpression::__asCode ( ) const [virtual], [inherited]
```

Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.

**Returns**

A code-string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#).

**5.43.3.3 [\\_\\_assign\\_index\(\)](#)**

```
GarbageCollected ComputedExpression::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value ) [virtual], [inherited]
```

Perform an index assignment to the supplied value.

**Parameters**

<i>index</i>	The index to which the value should be applied.
<i>value</i>	The value to store.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.43.3.4 `__boolean()`

```
GarbageCollected ComputedExpression::__boolean ( ) const [virtual], [inherited]
```

Perform a type cast to boolean.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.43.3.5 `__divide()`

```
GarbageCollected ComputedExpression::__divide (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of dividing this value and the supplied value.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to divide this by.
------------	---

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.43.3.6 `__equal()`

```
GarbageCollected ComputedExpressionNativeBoundFunction::__equal (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Perform an equality test.

#### Parameters


<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

#### Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.43.3.7 \_\_float()

`GarbageCollected` `ComputedExpression::__float ( ) const [virtual], [inherited]`

Perform a type cast to float.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.43.3.8 \_\_getIterator()

`GarbageCollected` `ComputedExpression::__getIterator (`  
`const GarbageCollected & collection ) const [virtual], [inherited]`

Get an iterator for the expression.

#### Parameters

<code>collection</code>	The <code>GarbageCollected</code> value that will serve as the collection through which to iterate.
-------------------------	---

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.43.3.9 \_\_index()

`GarbageCollected` `ComputedExpression::__index (`  
`const GarbageCollected & index ) const [virtual], [inherited]`

Perform an index operation.

#### Parameters

<i>index</i>	The index expression provided by the script.
--------------	--

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.43.3.10 `__integer()`

```
GarbageCollected ComputedExpression::__integer ( ) const [virtual], [inherited]
```

Perform a type cast to integer.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.43.3.11 `__iteratorNext()`

```
GarbageCollected ComputedExpression::__iteratorNext ( size_t index = 0 ) const [virtual], [inherited]
```

Get the next iterative value.

#### Parameters

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIterator](#), and [Tang::ComputedExpressionArray](#).

### 5.43.3.12 `__lessThan()`

```
GarbageCollected ComputedExpression::__lessThan ( const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the "less than" comparison.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.43.3.13 [\\_\\_modulo\(\)](#)

```
GarbageCollected ComputedExpression::__modulo (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of moduloing this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to modulo this by.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionError](#).

### 5.43.3.14 [\\_\\_multiply\(\)](#)

```
GarbageCollected ComputedExpression::__multiply (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of multiplying this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to multiply to this.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.43.3.15 `__negative()`

```
GarbageCollected ComputedExpression::__negative ( ) const [virtual], [inherited]
```

Compute the result of negating this value.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.43.3.16 `__not()`

```
GarbageCollected ComputedExpression::__not ( ) const [virtual], [inherited]
```

Compute the logical not of this value.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.43.3.17 `__period()`

```
GarbageCollected ComputedExpression::__period (
    const GarbageCollected & member,
    std::shared_ptr< TangBase > & tang ) const [virtual], [inherited]
```

Perform a member access (period) operation.

#### Parameters

<code>member</code>	The member expression provided by the script.
---------------------	---

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionLibrary](#).

**5.43.3.18 \_\_slice()**

```
GarbageCollected ComputedExpression::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [virtual], [inherited]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

**Parameters**

<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), and [Tang::ComputedExpressionArray](#).

**5.43.3.19 \_\_string()**

```
GarbageCollected ComputedExpression::__string () const [virtual], [inherited]
```

Perform a type cast to string.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIteratorEnd](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionArray](#).

**5.43.3.20 \_\_subtract()**

```
GarbageCollected ComputedExpression::__subtract (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of subtracting this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to subtract from this.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.43.3.21 dump()**

```
string ComputedExpressionNativeBoundFunction::dump ( ) const [override], [virtual]
```

Output the contents of the [ComputedExpression](#) as a string.

**Returns**

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

**5.43.3.22 getArgc()**

```
size_t ComputedExpressionNativeBoundFunction::getArgc ( ) const
```

Get the count of arguments that this function expects.

**Returns**

The count of arguments that this function expects.

**5.43.3.23 getFunction()**

```
NativeBoundFunction ComputedExpressionNativeBoundFunction::getFunction ( ) const
```

Get the native bound function to be executed.

**Returns**

The native bound function to be executed.

### 5.43.3.24 getTargetTypeIndex()

```
const type_index & ComputedExpressionNativeBoundFunction::getTargetTypeIndex ( ) const
```

Get the type of the value to which the function is bound.

#### Returns

The type of the value to which the function is bound.

### 5.43.3.25 is\_equal() [1/6]

```
virtual bool Tang::ComputedExpression::is_equal ( const bool & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionBoolean](#).

### 5.43.3.26 is\_equal() [2/6]

```
virtual bool Tang::ComputedExpression::is_equal ( const Error & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionError](#).

### 5.43.3.27 `is_equal()` [3/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::nullptr_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

#### Returns

True if equal, false if not.

### 5.43.3.28 `is_equal()` [4/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::string & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.43.3.29 `is_equal()` [5/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::float_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.43.3.30 is\_equal() [6/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::integer_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<code>val</code>	The value to compare against.
------------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.43.3.31 isCopyNeeded()**

```
bool ComputedExpression::isCopyNeeded ( ) const [virtual], [inherited]
```

Determine whether or not a copy is needed.

Copying is only required for ComputedExpressions which serve as containers, such as [ComputedExpressionArray](#) and [ComputedExpressionObject](#).

**Returns**

Whether or not a copy is needed.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

**5.43.3.32 makeCopy()**

```
GarbageCollected ComputedExpressionNativeBoundFunction::makeCopy ( ) const [override], [virtual]
```

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

**Returns**

A [Tang::GarbageCollected](#) value for the new [ComputedExpression](#).

Reimplemented from [Tang::ComputedExpression](#).

The documentation for this class was generated from the following files:


- [include/computedExpressionNativeBoundFunction.hpp](#)
- [src/computedExpressionNativeBoundFunction.cpp](#)

## 5.44 Tang::ComputedExpressionNativeFunction Class Reference


Represents a Native Function provided by compiled C++ code.

```
#include <computedExpressionNativeFunction.hpp>
```

Inheritance diagram for Tang::ComputedExpressionNativeFunction:

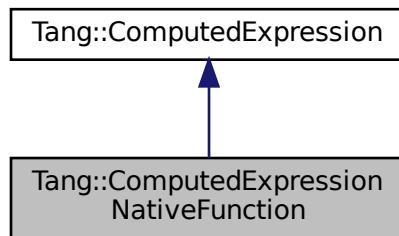

Collaboration diagram for Tang::ComputedExpressionNativeFunction:

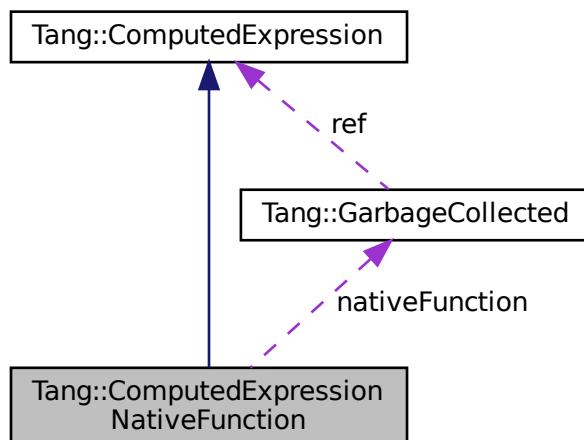

### Public Member Functions

- [ComputedExpressionNativeFunction \(NativeFunction nativeFunction, size\\_t argc\)](#)  
*Construct an NativeFunction.*
- virtual std::string [dump \(\) const override](#)  
*Output the contents of the [ComputedExpression](#) as a string.*

- `GarbageCollected makeCopy () const override`  
*Make a copy of the `ComputedExpression` (recursively, if appropriate).*
- `virtual GarbageCollected __equal (const GarbageCollected &rhs) const override`  
*Perform an equality test.*
- `NativeFunction getFunction () const`  
*Get the native bound function to be executed.*
- `size_t getArgc () const`  
*Get the count of arguments that this function expects.*
- `virtual std::string __asCode () const`  
*Output the contents of the `ComputedExpression` as a string similar to how it would be represented as code.*
- `virtual bool isCopyNeeded () const`  
*Determine whether or not a copy is needed.*
- `virtual bool is_equal (const Tang::integer_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const Tang::float_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const bool &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const std::string &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const Error &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual bool is_equal (const std::nullptr_t &val) const`  
*Check whether or not the computed expression is equal to another value.*
- `virtual GarbageCollected __assign_index (const GarbageCollected &index, const GarbageCollected &value) const`  
*Perform an index assignment to the supplied value.*
- `virtual GarbageCollected __add (const GarbageCollected &rhs) const`  
*Compute the result of adding this value and the supplied value.*
- `virtual GarbageCollected __subtract (const GarbageCollected &rhs) const`  
*Compute the result of subtracting this value and the supplied value.*
- `virtual GarbageCollected __multiply (const GarbageCollected &rhs) const`  
*Compute the result of multiplying this value and the supplied value.*
- `virtual GarbageCollected __divide (const GarbageCollected &rhs) const`  
*Compute the result of dividing this value and the supplied value.*
- `virtual GarbageCollected __modulo (const GarbageCollected &rhs) const`  
*Compute the result of moduloing this value and the supplied value.*
- `virtual GarbageCollected __negative () const`  
*Compute the result of negating this value.*
- `virtual GarbageCollected __not () const`  
*Compute the logical not of this value.*
- `virtual GarbageCollected __lessThan (const GarbageCollected &rhs) const`  
*Compute the "less than" comparison.*
- `virtual GarbageCollected __period (const GarbageCollected &member, std::shared_ptr< TangBase > &tang) const`  
*Perform a member access (period) operation.*
- `virtual GarbageCollected __index (const GarbageCollected &index) const`  
*Perform an index operation.*
- `virtual GarbageCollected __slice (const GarbageCollected &begin, const GarbageCollected &end, const GarbageCollected &skip) const`  
*Perform a slice operation.*
- `virtual GarbageCollected __getIterator (const GarbageCollected &collection) const`

- virtual `GarbageCollected __iteratorNext (size_t index=0) const`  
*Get an iterator for the expression.*
- virtual `GarbageCollected __integer () const`  
*Get the next iterative value.*
- virtual `GarbageCollected __float () const`  
*Perform a type cast to float.*
- virtual `GarbageCollected __boolean () const`  
*Perform a type cast to boolean.*
- virtual `GarbageCollected __string () const`  
*Perform a type cast to string.*

## Private Attributes

- `NativeFunction nativeFunction`  
*The native bound function to be executed.*
- `size_t argc`  
*The count of arguments that this function expects.*

### 5.44.1 Detailed Description

Represents a Native Function provided by compiled C++ code.

### 5.44.2 Constructor & Destructor Documentation

#### 5.44.2.1 ComputedExpressionNativeFunction()

```
ComputedExpressionNativeFunction::ComputedExpressionNativeFunction (
    NativeFunction nativeFunction,
    size_t argc )
```

Construct an NativeFunction.

The object itself is designed to be safe in that, once it is constructed, the method function pointer, and argument count cannot be changed, but can only be accessible through a getter.

#### Parameters

<code>nativeFunction</code>	The native function to be executed.
<code>argc</code>	The count of arguments that this function expects.

### 5.44.3 Member Function Documentation

### 5.44.3.1 \_\_add()

```
GarbageCollected ComputedExpression::__add (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of adding this value and the supplied value.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to add to this.
------------	--

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.44.3.2 \_\_asCode()

```
string ComputedExpression::__asCode ( ) const [virtual], [inherited]
```

Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.

#### Returns

A code-string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.44.3.3 \_\_assign\_index()

```
GarbageCollected ComputedExpression::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value ) [virtual], [inherited]
```

Perform an index assignment to the supplied value.

#### Parameters

<i>index</i>	The index to which the value should be applied.
<i>value</i>	The value to store.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

#### 5.44.3.4 `__boolean()`

```
GarbageCollected ComputedExpression::__boolean ( ) const [virtual], [inherited]
```

Perform a type cast to boolean.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

#### 5.44.3.5 `__divide()`

```
GarbageCollected ComputedExpression::__divide (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of dividing this value and the supplied value.

**Parameters**

<code>rhs</code>	The <a href="#">GarbageCollected</a> value to divide this by.
------------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

#### 5.44.3.6 `__equal()`

```
GarbageCollected ComputedExpressionNativeFunction::__equal (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Perform an equality test.

**Parameters**


<code>rhs</code>	The <a href="#">GarbageCollected</a> value to compare against.
------------------	--

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.44.3.7 `__float()`

[GarbageCollected](#) `ComputedExpression::__float () const [virtual], [inherited]`

Perform a type cast to float.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.44.3.8 `__getIterator()`

[GarbageCollected](#) `ComputedExpression::__getIterator (`  
`const GarbageCollected & collection ) const [virtual], [inherited]`

Get an iterator for the expression.

**Parameters**

<code>collection</code>	The <a href="#">GarbageCollected</a> value that will serve as the collection through which to iterate.
-------------------------	--

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

#### 5.44.3.9 `__index()`

```
GarbageCollected ComputedExpression::__index (
    const GarbageCollected & index ) const [virtual], [inherited]
```

Perform an index operation.

##### Parameters

<i>index</i>	The index expression provided by the script.
--------------	--

##### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

#### 5.44.3.10 `__integer()`

```
GarbageCollected ComputedExpression::__integer () const [virtual], [inherited]
```

Perform a type cast to integer.

##### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

#### 5.44.3.11 `__iteratorNext()`

```
GarbageCollected ComputedExpression::__iteratorNext (
    size_t index = 0 ) const [virtual], [inherited]
```

Get the next iterative value.

##### Parameters

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIterator](#), and [Tang::ComputedExpressionArray](#).

#### 5.44.3.12 `__lessThan()`

```
GarbageCollected ComputedExpression::__lessThan (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the "less than" comparison.

##### Parameters

<code>rhs</code>	The <a href="#">GarbageCollected</a> value to compare against.
------------------	--

##### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

#### 5.44.3.13 `__modulo()`

```
GarbageCollected ComputedExpression::__modulo (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of moduloing this value and the supplied value.

##### Parameters

<code>rhs</code>	The <a href="#">GarbageCollected</a> value to modulo this by.
------------------	---

##### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionError](#).

#### 5.44.3.14 `__multiply()`

```
GarbageCollected ComputedExpression::__multiply (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of multiplying this value and the supplied value.

**Parameters**

<code>rhs</code>	The <a href="#">GarbageCollected</a> value to multiply to this.
------------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.44.3.15 `__negative()`**

[GarbageCollected](#) `ComputedExpression::__negative () const [virtual], [inherited]`

Compute the result of negating this value.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.44.3.16 `__not()`**

[GarbageCollected](#) `ComputedExpression::__not () const [virtual], [inherited]`

Compute the logical not of this value.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

**5.44.3.17 `__period()`**

[GarbageCollected](#) `ComputedExpression::__period (`  
`const GarbageCollected & member,`  
`std::shared_ptr< TangBase > & tang ) const [virtual], [inherited]`

Perform a member access (period) operation.

## Parameters

<i>member</i>	The member expression provided by the script.
---------------	---

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionLibrary](#).

**5.44.3.18 \_\_slice()**

```
GarbageCollected ComputedExpression::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [virtual], [inherited]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

## Parameters

<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), and [Tang::ComputedExpressionArray](#).

**5.44.3.19 \_\_string()**

```
GarbageCollected ComputedExpression::__string ( ) const [virtual], [inherited]
```

Perform a type cast to string.

## Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIteratorEnd](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionArray](#).

### 5.44.3.20 `__subtract()`

```
GarbageCollected ComputedExpression::__subtract (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of subtracting this value and the supplied value.

#### Parameters

<code>rhs</code>	The <code>GarbageCollected</code> value to subtract from this.
------------------	--

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.44.3.21 `dump()`

```
string ComputedExpressionNativeFunction::dump ( ) const [override], [virtual]
```

Output the contents of the `ComputedExpression` as a string.

#### Returns

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

### 5.44.3.22 `getArgc()`

```
size_t ComputedExpressionNativeFunction::getArgc ( ) const
```

Get the count of arguments that this function expects.

#### Returns

The count of arguments that this function expects.

### 5.44.3.23 `getFunction()`

```
NativeFunction ComputedExpressionNativeFunction::getFunction ( ) const
```

Get the native bound function to be executed.

#### Returns

The native bound function to be executed.

### 5.44.3.24 `is_equal()` [1/6]

```
virtual bool Tang::ComputedExpression::is_equal ( const bool & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionBoolean](#).

**5.44.3.25 is\_equal() [2/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Error & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionError](#).

**5.44.3.26 is\_equal() [3/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::nullptr_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

### 5.44.3.27 is\_equal() [4/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::string & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.44.3.28 is\_equal() [5/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::float_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

#### Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

### 5.44.3.29 is\_equal() [6/6]

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::integer_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

#### Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.44.3.30 isCopyNeeded()**

```
bool ComputedExpression::isCopyNeeded ( ) const [virtual], [inherited]
```

Determine whether or not a copy is needed.

Copying is only required for ComputedExpressions which serve as containers, such as [ComputedExpressionArray](#) and [ComputedExpressionObject](#).

**Returns**

Whether or not a copy is needed.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

**5.44.3.31 makeCopy()**

```
GarbageCollected ComputedExpressionNativeFunction::makeCopy ( ) const [override], [virtual]
```

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

**Returns**

A [Tang::GarbageCollected](#) value for the new [ComputedExpression](#).

Reimplemented from [Tang::ComputedExpression](#).

The documentation for this class was generated from the following files:


- [include/computedExpressionNativeFunction.hpp](#)
- [src/computedExpressionNativeFunction.cpp](#)

## 5.45 Tang::ComputedExpressionNativeLibraryFunction Class Reference


Represents a Native Function provided by compiled C++ code that is executed to create a library or one of its attributes.

```
#include <computedExpressionNativeLibraryFunction.hpp>
```

Inheritance diagram for Tang::ComputedExpressionNativeLibraryFunction:

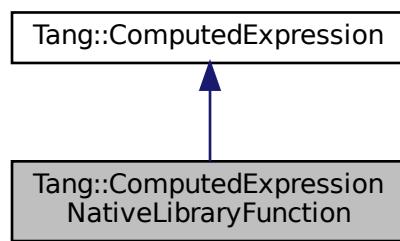

Collaboration diagram for Tang::ComputedExpressionNativeLibraryFunction:

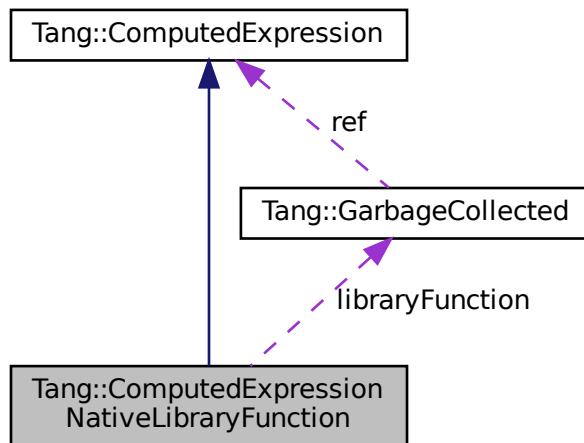

### Public Member Functions

- [ComputedExpressionNativeLibraryFunction \(LibraryFunction nativeFunction\)](#)  
*Construct a NativeLibraryFunction.*
- [virtual std::string dump \(\) const override](#)

- **Output the contents of the `ComputedExpression` as a string.**
- **GarbageCollected `makeCopy` () const override**
  - Make a copy of the `ComputedExpression` (recursively, if appropriate).*
- **virtual `GarbageCollected __equal` (const `GarbageCollected` &rhs) const override**
  - Perform an equality test.*
- **LibraryFunction `getFunction` () const**
  - Get the native bound function to be executed.*
- **virtual std::string `__asCode` () const**
  - Output the contents of the `ComputedExpression` as a string similar to how it would be represented as code.*
- **virtual bool `isCopyNeeded` () const**
  - Determine whether or not a copy is needed.*
- **virtual bool `is_equal` (const `Tang::integer_t` &val) const**
  - Check whether or not the computed expression is equal to another value.*
- **virtual bool `is_equal` (const `Tang::float_t` &val) const**
  - Check whether or not the computed expression is equal to another value.*
- **virtual bool `is_equal` (const bool &val) const**
  - Check whether or not the computed expression is equal to another value.*
- **virtual bool `is_equal` (const std::string &val) const**
  - Check whether or not the computed expression is equal to another value.*
- **virtual bool `is_equal` (const `Error` &val) const**
  - Check whether or not the computed expression is equal to another value.*
- **virtual `GarbageCollected __assign_index` (const `GarbageCollected` &index, const `GarbageCollected` &value) const**
  - Perform an index assignment to the supplied value.*
- **virtual `GarbageCollected __add` (const `GarbageCollected` &rhs) const**
  - Compute the result of adding this value and the supplied value.*
- **virtual `GarbageCollected __subtract` (const `GarbageCollected` &rhs) const**
  - Compute the result of subtracting this value and the supplied value.*
- **virtual `GarbageCollected __multiply` (const `GarbageCollected` &rhs) const**
  - Compute the result of multiplying this value and the supplied value.*
- **virtual `GarbageCollected __divide` (const `GarbageCollected` &rhs) const**
  - Compute the result of dividing this value and the supplied value.*
- **virtual `GarbageCollected __modulo` (const `GarbageCollected` &rhs) const**
  - Compute the result of moduloing this value and the supplied value.*
- **virtual `GarbageCollected __negative` () const**
  - Compute the result of negating this value.*
- **virtual `GarbageCollected __not` () const**
  - Compute the logical not of this value.*
- **virtual `GarbageCollected __lessThan` (const `GarbageCollected` &rhs) const**
  - Compute the "less than" comparison.*
- **virtual `GarbageCollected __period` (const `GarbageCollected` &member, std::shared\_ptr< `TangBase` > &tang) const**
  - Perform a member access (period) operation.*
- **virtual `GarbageCollected __index` (const `GarbageCollected` &index) const**
  - Perform an index operation.*
- **virtual `GarbageCollected __slice` (const `GarbageCollected` &begin, const `GarbageCollected` &end, const `GarbageCollected` &skip) const**
  - Perform a slice operation.*
- **virtual `GarbageCollected __getIterator` (const `GarbageCollected` &collection) const**
  - Get an iterator for the expression.*

- virtual `GarbageCollected __iteratorNext (size_t index=0) const`  
*Get the next iterative value.*
- virtual `GarbageCollected __integer () const`  
*Perform a type cast to integer.*
- virtual `GarbageCollected __float () const`  
*Perform a type cast to float.*
- virtual `GarbageCollected __boolean () const`  
*Perform a type cast to boolean.*
- virtual `GarbageCollected __string () const`  
*Perform a type cast to string.*

## Private Attributes

- `LibraryFunction libraryFunction`  
*The library function to be executed.*

### 5.45.1 Detailed Description

Represents a Native Function provided by compiled C++ code that is executed to create a library or one of its attributes.

The purpose of this function is to be able to construct a library or the library attributes as needed at runtime.

### 5.45.2 Constructor & Destructor Documentation

#### 5.45.2.1 ComputedExpressionNativeLibraryFunction()

```
ComputedExpressionNativeLibraryFunction::ComputedExpressionNativeLibraryFunction (
    LibraryFunction nativeFunction )
```

Construct a NativeLibraryFunction.

#### Parameters

<code>libraryFunction</code>	The library function to be executed.
------------------------------	--------------------------------------

### 5.45.3 Member Function Documentation

#### 5.45.3.1 \_\_add()

```
GarbageCollected ComputedExpression::__add (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of adding this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to add to this.
------------	--

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.45.3.2 [\\_\\_asCode\(\)](#)

```
string ComputedExpression::__asCode ( ) const [virtual], [inherited]
```

Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.

**Returns**

A code-string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionString](#).

### 5.45.3.3 [\\_\\_assign\\_index\(\)](#)

```
GarbageCollected ComputedExpression::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value ) [virtual], [inherited]
```

Perform an index assignment to the supplied value.

**Parameters**

<i>index</i>	The index to which the value should be applied.
<i>value</i>	The value to store.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.45.3.4 `__boolean()`

```
GarbageCollected ComputedExpression::__boolean ( ) const [virtual], [inherited]
```

Perform a type cast to boolean.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.45.3.5 `__divide()`

```
GarbageCollected ComputedExpression::__divide (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of dividing this value and the supplied value.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to divide this by.
------------	---

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.45.3.6 `__equal()`

```
GarbageCollected ComputedExpressionNativeLibraryFunction::__equal (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Perform an equality test.

#### Parameters


<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

#### Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



#### 5.45.3.7 `__float()`

`GarbageCollected` `ComputedExpression::__float ( ) const [virtual], [inherited]`

Perform a type cast to float.

##### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

#### 5.45.3.8 `__getIterator()`

`GarbageCollected` `ComputedExpression::__getIterator (`  
`const GarbageCollected & collection ) const [virtual], [inherited]`

Get an iterator for the expression.

##### Parameters

<code>collection</code>	The <code>GarbageCollected</code> value that will serve as the collection through which to iterate.
-------------------------	---

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

#### 5.45.3.9 `__index()`

`GarbageCollected` `ComputedExpression::__index (`  
`const GarbageCollected & index ) const [virtual], [inherited]`

Perform an index operation.

#### Parameters

<i>index</i>	The index expression provided by the script.
--------------	--

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.45.3.10 \_\_integer()

`GarbageCollected ComputedExpression::__integer ( ) const [virtual], [inherited]`

Perform a type cast to integer.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.45.3.11 \_\_iteratorNext()

`GarbageCollected ComputedExpression::__iteratorNext ( size_t index = 0 ) const [virtual], [inherited]`

Get the next iterative value.

#### Parameters

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIterator](#), and [Tang::ComputedExpressionArray](#).

### 5.45.3.12 \_\_lessThan()

`GarbageCollected ComputedExpression::__lessThan ( const GarbageCollected & rhs ) const [virtual], [inherited]`

Compute the "less than" comparison.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.45.3.13 [\\_\\_modulo\(\)](#)**

```
GarbageCollected ComputedExpression::__modulo (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of moduloing this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to modulo this by.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionError](#).

**5.45.3.14 [\\_\\_multiply\(\)](#)**

```
GarbageCollected ComputedExpression::__multiply (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of multiplying this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to multiply to this.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.45.3.15 `__negative()`

```
GarbageCollected ComputedExpression::__negative ( ) const [virtual], [inherited]
```

Compute the result of negating this value.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.45.3.16 `__not()`

```
GarbageCollected ComputedExpression::__not ( ) const [virtual], [inherited]
```

Compute the logical not of this value.

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.45.3.17 `__period()`

```
GarbageCollected ComputedExpression::__period (
    const GarbageCollected & member,
    std::shared_ptr< TangBase > & tang ) const [virtual], [inherited]
```

Perform a member access (period) operation.

#### Parameters

<code>member</code>	The member expression provided by the script.
---------------------	---

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionLibrary](#).

**5.45.3.18 \_\_slice()**

```
GarbageCollected ComputedExpression::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [virtual], [inherited]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

**Parameters**

<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionString](#), and [Tang::ComputedExpressionArray](#).

**5.45.3.19 \_\_string()**

```
GarbageCollected ComputedExpression::__string () const [virtual], [inherited]
```

Perform a type cast to string.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionMap](#), [Tang::ComputedExpressionIteratorEnd](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionArray](#).

**5.45.3.20 \_\_subtract()**

```
GarbageCollected ComputedExpression::__subtract (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of subtracting this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to subtract from this.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

**5.45.3.21 dump()**

```
string ComputedExpressionNativeLibraryFunction::dump ( ) const [override], [virtual]
```

Output the contents of the [ComputedExpression](#) as a string.

**Returns**

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

**5.45.3.22 getFunction()**

```
LibraryFunction ComputedExpressionNativeLibraryFunction::getFunction ( ) const
```

Get the native bound function to be executed.

**Returns**

The native bound function to be executed.

**5.45.3.23 is\_equal() [1/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const bool & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#), [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionBoolean](#).

**5.45.3.24 is\_equal() [2/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Error & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionError](#).

**5.45.3.25 is\_equal() [3/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::nullptr_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

**5.45.3.26 is\_equal() [4/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const std::string & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionString](#).

**5.45.3.27 is\_equal() [5/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::float_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.45.3.28 is\_equal() [6/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::integer_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

### 5.45.3.29 isCopyNeeded()

```
bool ComputedExpression::isCopyNeeded ( ) const [virtual], [inherited]
```

Determine whether or not a copy is needed.

Copying is only required for ComputedExpressions which serve as containers, such as [ComputedExpressionArray](#) and [ComputedExpressionObject](#).

#### Returns

Whether or not a copy is needed.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.45.3.30 makeCopy()

```
GarbageCollected ComputedExpressionNativeLibraryFunction::makeCopy ( ) const [override], [virtual]
```

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

#### Returns

A [Tang::GarbageCollected](#) value for the new [ComputedExpression](#).

Reimplemented from [Tang::ComputedExpression](#).

The documentation for this class was generated from the following files:


- [include/computedExpressionNativeLibraryFunction.hpp](#)
- [src/computedExpressionNativeLibraryFunction.cpp](#)

## 5.46 Tang::ComputedExpressionString Class Reference


Represents a String that is the result of a computation.

```
#include <computedExpressionString.hpp>
```

Inheritance diagram for Tang::ComputedExpressionString:

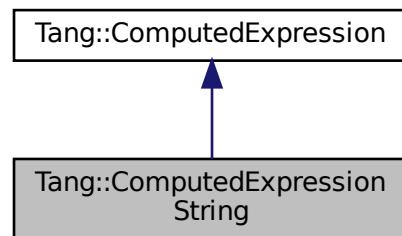

Collaboration diagram for Tang::ComputedExpressionString:

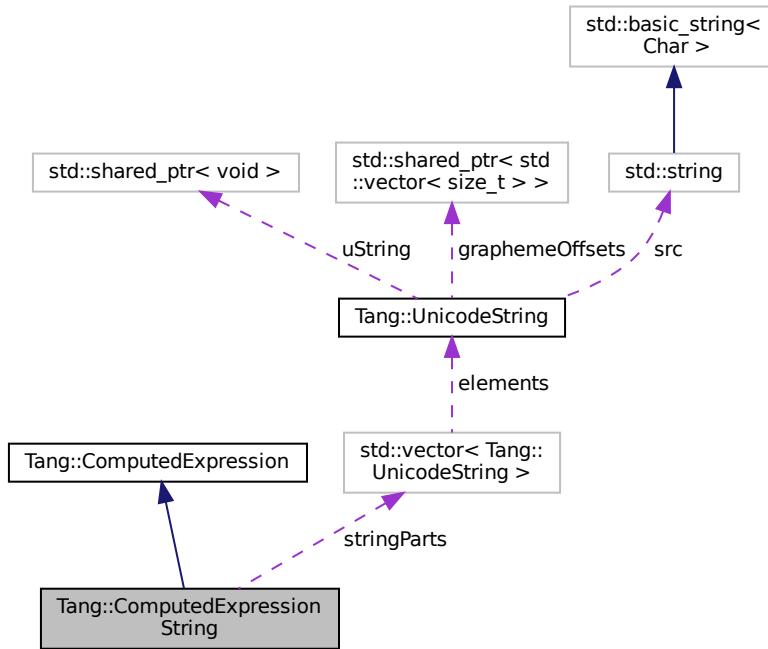

## Public Member Functions

- `ComputedExpressionString (const std::string &val)`  
`Construct a String result.`
- `ComputedExpressionString (const std::vector<UnicodeString> &stringParts)`  
`Construct a String result from a vector of UnicodeString objects.`
- virtual `std::string dump () const override`  
`Output the contents of the ComputedExpression as a string.`
- virtual `std::string __asCode () const override`  
`Output the contents of the ComputedExpression as a string similar to how it would be represented as code.`
- `GarbageCollected makeCopy () const override`  
`Make a copy of the ComputedExpression (recursively, if appropriate).`
- virtual `bool is_equal (const bool &val) const override`  
`Check whether or not the computed expression is equal to another value.`
- virtual `bool is_equal (const std::string &val) const override`  
`Check whether or not the computed expression is equal to another value.`
- virtual `GarbageCollected __index (const GarbageCollected &index) const override`  
`Perform an index operation.`
- virtual `GarbageCollected __slice (const GarbageCollected &begin, const GarbageCollected &end, const GarbageCollected &skip) const override`  
`Perform a slice operation.`
- virtual `GarbageCollected __getIterator (const GarbageCollected &collection) const override`  
`Get an iterator for the expression.`
- virtual `GarbageCollected __iteratorNext (size_t index) const override`

- Get the next iterative value.*
- virtual `GarbageCollected __add` (const `GarbageCollected` &rhs) const override  
*Compute the result of adding this value and the supplied value.*
  - virtual `GarbageCollected __not` () const override  
*Compute the logical not of this value.*
  - virtual `GarbageCollected __lessThan` (const `GarbageCollected` &rhs) const override  
*Compute the "less than" comparison.*
  - virtual `GarbageCollected __equal` (const `GarbageCollected` &rhs) const override  
*Perform an equality test.*
  - virtual `GarbageCollected __boolean` () const override  
*Perform a type cast to boolean.*
  - virtual `GarbageCollected __string` () const override  
*Perform a type cast to string.*
  - const `std::vector< UnicodeString > & getValue` () const  
*Return the collection of string values that are stored in this object.*
  - `size_t length` () const  
*Return the number of graphemes contained in the string.*
  - `size_t bytesLength` () const  
*Return the number of bytes required by the string, stored as UTF-8.*
  - `ComputedExpressionString & operator+=` (const `ComputedExpressionString` &rhs)  
*Helper function to copy the contents of the rhs string into the current string.*
  - void `setUntrusted` ()  
*Set all of the string parts to `UnicodeString::Type::Untrusted`.*
  - void `setPercent` ()  
*Set all of the string parts to `UnicodeString::Type::Percent`.*
  - virtual bool `isCopyNeeded` () const  
*Determine whether or not a copy is needed.*
  - virtual bool `is_equal` (const `Tang::integer_t` &val) const  
*Check whether or not the computed expression is equal to another value.*
  - virtual bool `is_equal` (const `Tang::float_t` &val) const  
*Check whether or not the computed expression is equal to another value.*
  - virtual bool `is_equal` (const `Error` &val) const  
*Check whether or not the computed expression is equal to another value.*
  - virtual bool `is_equal` (const `std::nullptr_t` &val) const  
*Check whether or not the computed expression is equal to another value.*
  - virtual `GarbageCollected __assign_index` (const `GarbageCollected` &index, const `GarbageCollected` &value)  
*Perform an index assignment to the supplied value.*
  - virtual `GarbageCollected __subtract` (const `GarbageCollected` &rhs) const  
*Compute the result of subtracting this value and the supplied value.*
  - virtual `GarbageCollected __multiply` (const `GarbageCollected` &rhs) const  
*Compute the result of multiplying this value and the supplied value.*
  - virtual `GarbageCollected __divide` (const `GarbageCollected` &rhs) const  
*Compute the result of dividing this value and the supplied value.*
  - virtual `GarbageCollected __modulo` (const `GarbageCollected` &rhs) const  
*Compute the result of moduloing this value and the supplied value.*
  - virtual `GarbageCollected __negative` () const  
*Compute the result of negating this value.*
  - virtual `GarbageCollected __period` (const `GarbageCollected` &member, `std::shared_ptr< TangBase >` &tang)  
const  
*Perform a member access (period) operation.*
  - virtual `GarbageCollected __integer` () const  
*Perform a type cast to integer.*
  - virtual `GarbageCollected __float` () const  
*Perform a type cast to float.*

## Static Public Member Functions

- static `NativeBoundFunctionMap getMethods ()`  
*Return the member functions implemented for this particular expression type.*

## Private Attributes

- `std::vector< UnicodeString > stringParts`  
*The string value.*
- `std::optional< size_t > cachedLength`  
*Cache of the string length in graphemes.*
- `std::optional< size_t > cachedBytesLength`  
*Cache of the string length in bytes.*

### 5.46.1 Detailed Description

Represents a String that is the result of a computation.

### 5.46.2 Constructor & Destructor Documentation

#### 5.46.2.1 `ComputedExpressionString()` [1/2]

```
ComputedExpressionString::ComputedExpressionString ( const std::string & val )
```

Construct a String result.

##### Parameters

<code>val</code>	The string value.
------------------	-------------------

#### 5.46.2.2 `ComputedExpressionString()` [2/2]

```
ComputedExpressionString::ComputedExpressionString ( const std::vector< UnicodeString > & stringParts )
```

Construct a String result from a vector of `UnicodeString` objects.

##### Parameters

<code>stringParts</code>	The vector of <code>UnicodeString</code> objects.
--------------------------	---

### 5.46.3 Member Function Documentation

#### 5.46.3.1 \_\_add()

```
GarbageCollected ComputedExpressionString::__add (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of adding this value and the supplied value.

##### Parameters


<i>rhs</i>	The <a href="#">GarbageCollected</a> value to add to this.
------------	--

##### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



#### 5.46.3.2 \_\_asCode()

```
string ComputedExpressionString::__asCode ( ) const [override], [virtual]
```

Output the contents of the [ComputedExpression](#) as a string similar to how it would be represented as code.

**Returns**

A code-string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

**5.46.3.3 \_\_assign\_index()**

```
GarbageCollected ComputedExpression::__assign_index (
    const GarbageCollected & index,
    const GarbageCollected & value ) [virtual], [inherited]
```

Perform an index assignment to the supplied value.

**Parameters**

<i>index</i>	The index to which the value should be applied.
<i>value</i>	The value to store.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

**5.46.3.4 \_\_boolean()**

```
GarbageCollected ComputedExpressionString::__boolean () const [override], [virtual]
```

Perform a type cast to boolean.

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.46.3.5 `__divide()`

```
GarbageCollected ComputedExpression::__divide (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of dividing this value and the supplied value.

**Parameters**

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to divide this by.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.46.3.6 `__equal()`

```
GarbageCollected ComputedExpressionString::__equal (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Perform an equality test.

**Parameters**


<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

**Returns**

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

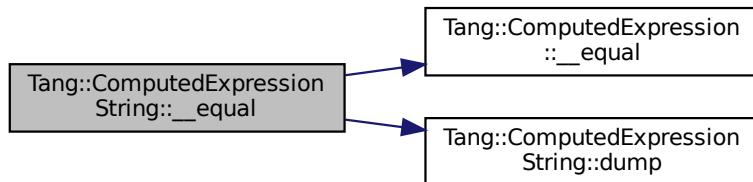**5.46.3.7 \_\_float()**

[GarbageCollected](#) `ComputedExpression::__float () const [virtual], [inherited]`

Perform a type cast to float.

**Returns**

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

**5.46.3.8 \_\_getIterator()**

```

GarbageCollected ComputedExpressionString::__getIterator (
    const GarbageCollected & collection ) const [override], [virtual]
  
```

Get an iterator for the expression.

**Parameters**

<code>collection</code>	The <a href="#">GarbageCollected</a> value that will serve as the collection through which to iterate.
-------------------------	--

Reimplemented from [Tang::ComputedExpression](#).

### 5.46.3.9 \_\_index()

```
GarbageCollected ComputedExpressionString::__index (
    const GarbageCollected & index ) const [override], [virtual]
```

Perform an index operation.

#### Parameters


<i>index</i>	The index expression provided by the script.
--------------	--

#### Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

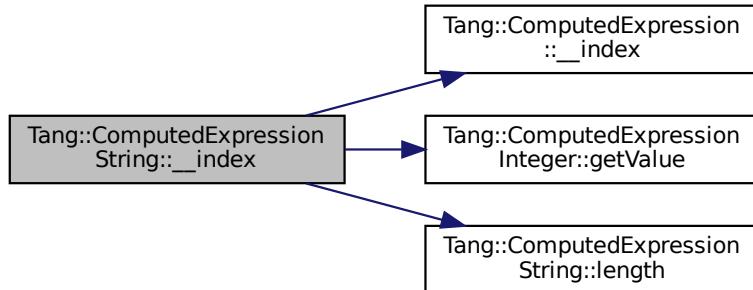

### 5.46.3.10 \_\_integer()

```
GarbageCollected ComputedExpression::__integer ( ) const [virtual], [inherited]
```

Perform a type cast to integer.

#### Returns

The result of the the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), [Tang::ComputedExpressionError](#), and [Tang::ComputedExpressionBoolean](#).

### 5.46.3.11 `__iteratorNext()`

```
GarbageCollected ComputedExpressionString::__iteratorNext (
    size_t index ) const [override], [virtual]
```


Get the next iterative value.

#### Parameters

<i>index</i>	The desired index value.
--------------	--------------------------

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

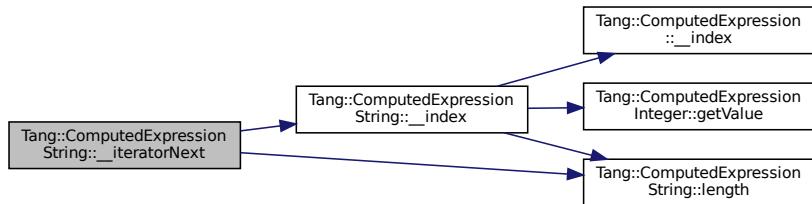

### 5.46.3.12 `__lessThan()`

```
GarbageCollected ComputedExpressionString::__lessThan (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the "less than" comparison.

#### Parameters


<i>rhs</i>	The <a href="#">GarbageCollected</a> value to compare against.
------------	--

#### Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

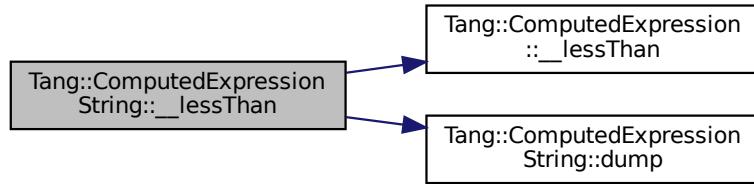

#### 5.46.3.13 \_\_modulo()

```
GarbageCollected ComputedExpression::__modulo (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of moduloing this value and the supplied value.

##### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to modulo this by.
------------	---

##### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionError](#).

#### 5.46.3.14 \_\_multiply()

```
GarbageCollected ComputedExpression::__multiply (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of multiplying this value and the supplied value.

##### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to multiply to this.
------------	---

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.46.3.15 `__negative()`

`GarbageCollected ComputedExpression::__negative ( ) const [virtual], [inherited]`

Compute the result of negating this value.

**Returns**

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.46.3.16 `__not()`

`GarbageCollected ComputedExpressionString::__not ( ) const [override], [virtual]`

Compute the logical not of this value.

**Returns**

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



### 5.46.3.17 `__period()`

`GarbageCollected ComputedExpression::__period (`  
`const GarbageCollected & member,`  
`std::shared_ptr< TangBase > & tang ) const [virtual], [inherited]`

Perform a member access (period) operation.

## Parameters

<i>member</i>	The member expression provided by the script.
---------------	---

## Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionLibrary](#).

**5.46.3.18 \_\_slice()**

```
GarbageCollected ComputedExpressionString::__slice (
    const GarbageCollected & begin,
    const GarbageCollected & end,
    const GarbageCollected & skip ) const [override], [virtual]
```

Perform a slice operation.

Convention will follow Python semantics, in which a slice will start at the provided index position, and go up to but not including the end index. The slice will default to an index increment of 1, but can be defined as another integer value.

## Parameters


<i>begin</i>	The begin index expression provided by the script.
<i>end</i>	The end index expression provided by the script.
<i>skip</i>	The skip index expression provided by the script.

## Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

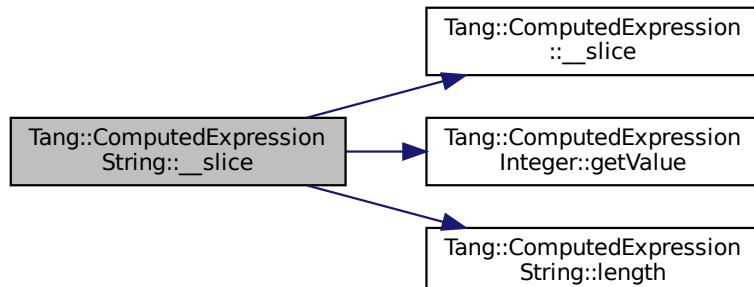

### 5.46.3.19 `__string()`

```
GarbageCollected ComputedExpressionString::__string ( ) const [override], [virtual]
```

Perform a type cast to string.

#### Returns

The result of the the operation.

Reimplemented from [Tang::ComputedExpression](#).

### 5.46.3.20 `__subtract()`

```
GarbageCollected ComputedExpression::__subtract ( const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of subtracting this value and the supplied value.

#### Parameters

<i>rhs</i>	The <a href="#">GarbageCollected</a> value to subtract from this.
------------	---

#### Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

### 5.46.3.21 `bytesLength()`

```
size_t ComputedExpressionString::bytesLength ( ) const
```

Return the number of bytes required by the string, stored as UTF-8.

#### Returns

The number of bytes required by the string, stored as UTF-8.

### 5.46.3.22 dump()

```
string ComputedExpressionString::dump ( ) const [override], [virtual]
```

Output the contents of the [ComputedExpression](#) as a string.

#### Returns

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

### 5.46.3.23 getMethods()

```
NativeBoundFunctionMap ComputedExpressionString::getMethods ( ) [static]
```

Return the member functions implemented for this particular expression type.

#### Returns

The member functions implemented.

Here is the call graph for this function:



### 5.46.3.24 getValue()

```
const vector< UnicodeString > & ComputedExpressionString::getValue ( ) const
```

Return the collection of string values that are stored in this object.

#### Returns

The collection of string values.

### 5.46.3.25 is\_equal() [1/6]

```
bool ComputedExpressionString::is_equal (
    const bool & val ) const [override], [virtual]
```

Check whether or not the computed expression is equal to another value.

**Parameters**


<code>val</code>	The value to compare against.
------------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

**5.46.3.26 is\_equal() [2/6]**

```
virtual bool Tang::ComputedExpression::is_equal ( const Error & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<code>val</code>	The value to compare against.
------------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionError](#).

**5.46.3.27 is\_equal() [3/6]**

```
virtual bool Tang::ComputedExpression::is_equal ( const std::nullptr_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

## Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

## Returns

True if equal, false if not.

**5.46.3.28 `is_equal()` [4/6]**

```
bool ComputedExpressionString::is_equal (
    const std::string & val ) const [override], [virtual]
```

Check whether or not the computed expression is equal to another value.

## Parameters

<code>val</code>	The value to compare against.
------------------	-------------------------------

## Returns

True if equal, false if not.

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:

**5.46.3.29 `is_equal()` [5/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::float_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.46.3.30 is\_equal() [6/6]**

```
virtual bool Tang::ComputedExpression::is_equal (
    const Tang::integer_t & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

**Parameters**

<i>val</i>	The value to compare against.
------------	-------------------------------

**Returns**

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

**5.46.3.31 isCopyNeeded()**

```
bool ComputedExpression::isCopyNeeded ( ) const [virtual], [inherited]
```

Determine whether or not a copy is needed.

Copying is only required for ComputedExpressions which serve as containers, such as [ComputedExpressionArray](#) and [ComputedExpressionObject](#).

**Returns**

Whether or not a copy is needed.

Reimplemented in [Tang::ComputedExpressionMap](#), and [Tang::ComputedExpressionArray](#).

### 5.46.3.32 length()

```
size_t ComputedExpressionString::length ( ) const
```

Return the number of graphemes contained in the string.

#### Returns

The number of graphemes contained in the string.

### 5.46.3.33 makeCopy()

```
GarbageCollected ComputedExpressionString::makeCopy ( ) const [override], [virtual]
```

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

#### Returns

A [Tang::GarbageCollected](#) value for the new [ComputedExpression](#).

Reimplemented from [Tang::ComputedExpression](#).

### 5.46.3.34 operator+=( )

```
ComputedExpressionString & ComputedExpressionString::operator+= ( const ComputedExpressionString & rhs )
```

Helper function to copy the contents of the rhs string into the current string.

#### Parameters

<i>rhs</i>	The right hand side of the operation.
------------	---------------------------------------

#### Returns

The result of the operation.

The documentation for this class was generated from the following files:


- [include/computedExpressionString.hpp](#)
- [src/computedExpressionString.cpp](#)

## 5.47 Tang::Context Class Reference

Holds all environment variables specific to the execution of a program.

```
#include <context.hpp>
```

Collaboration diagram for Tang::Context:

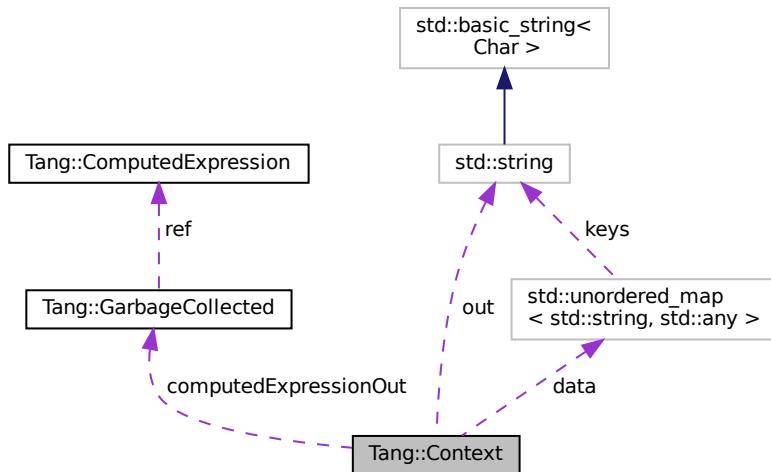

### Public Member Functions

- [Context \(ContextData &&data\)](#)

*Default constructor.*

### Public Attributes

- [ContextData data](#)  
*Holds arbitrary data for use in the program execution.*
- [std::string out](#)  
*The output result from the program execution.*
- [GarbageCollected computedExpressionOut](#)  
*The output result from the program execution, as a [ComputedExpressionString](#).*
- [std::optional< GarbageCollected > result](#)  
*The result of the [Program](#) execution.*

#### 5.47.1 Detailed Description

Holds all environment variables specific to the execution of a program.

The documentation for this class was generated from the following files:


- [include/context.hpp](#)
- [src/context.cpp](#)

## 5.48 Tang::Error Class Reference

The [Error](#) class is used to report any error of the system, whether a syntax (parsing) error or a runtime (execution) error.

```
#include <error.hpp>
```

Collaboration diagram for Tang::Error:

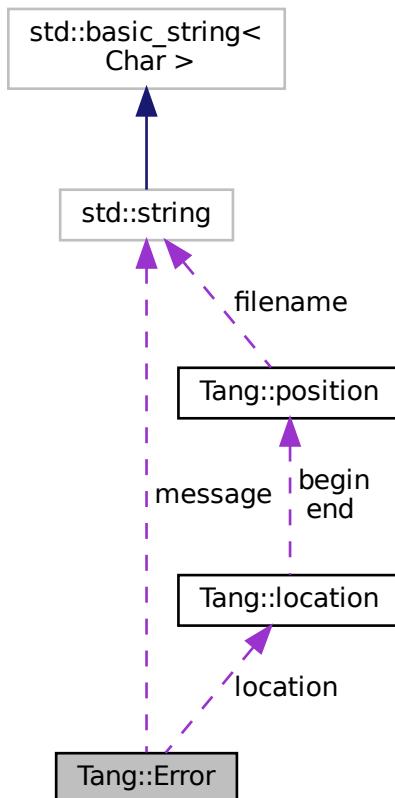

### Public Member Functions

- [Error \(\)](#)  
*Creates an empty error message.*
- [Error \(std::string message\)](#)  
*Creates an error message using the supplied error string and location.*
- [Error \(std::string message, Tang::location location\)](#)  
*Creates an error message using the supplied error string and location.*

### Public Attributes

- `std::string message`  
*The error message as a string.*
- `Tang::location location`  
*The location of the error.*

## Friends

- std::ostream & `operator<<` (std::ostream &out, const [Error](#) &error)  
*Add friendly output.*

### 5.48.1 Detailed Description

The [Error](#) class is used to report any error of the system, whether a syntax (parsing) error or a runtime (execution) error.

### 5.48.2 Constructor & Destructor Documentation

#### 5.48.2.1 `Error()` [1/2]

```
Tang::Error::Error (
    std::string message )  [inline]
```

Creates an error message using the supplied error string and location.

##### Parameters

<code>message</code>	The error message as a string.
----------------------	--------------------------------

#### 5.48.2.2 `Error()` [2/2]

```
Tang::Error::Error (
    std::string message,
    Tang::location location )  [inline]
```

Creates an error message using the supplied error string and location.

##### Parameters

<code>message</code>	The error message as a string.
<code>location</code>	The location of the error.

### 5.48.3 Friends And Related Function Documentation

### 5.48.3.1 operator<<

```
std::ostream& operator<< (  
    std::ostream & out,  
    const Error & error ) [friend]
```

Add friendly output.

#### Parameters

<i>out</i>	The output stream.
<i>error</i>	The <a href="#">Error</a> object.

#### Returns

The output stream.

The documentation for this class was generated from the following files:


- [include/error.hpp](#)
- [src/error.cpp](#)

## 5.49 Tang::GarbageCollected Class Reference

A container that acts as a resource-counting garbage collector for the specified type.

```
#include <garbageCollected.hpp>
```

Collaboration diagram for Tang::GarbageCollected:

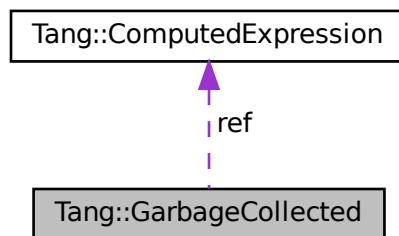

## Public Member Functions

- `GarbageCollected (const GarbageCollected &other)`  
`Copy Constructor.`
- `GarbageCollected (GarbageCollected &&other)`  
`Move Constructor.`
- `GarbageCollected & operator= (const GarbageCollected &other)`  
`Copy Assignment.`
- `GarbageCollected & operator= (GarbageCollected &&other)`  
`Move Assignment.`
- `~GarbageCollected ()`  
`Destructor.`
- `bool isCopyNeeded () const`  
`Determine whether or not a copy is needed as determined by the referenced ComputedExpression.`
- `GarbageCollected makeCopy () const`  
`Create a separate copy of the original GarbageCollected value.`
- `ComputedExpression * operator-> () const`  
`Access the tracked object as a pointer.`
- `ComputedExpression & operator* () const`  
`Access the tracked object.`
- `bool operator== (const Tang::integer_t &val) const`  
`Compare the GarbageCollected tracked object with a supplied value.`
- `bool operator== (const Tang::float_t &val) const`  
`Compare the GarbageCollected tracked object with a supplied value.`
- `bool operator== (const bool &val) const`  
`Compare the GarbageCollected tracked object with a supplied value.`
- `bool operator== (const std::string &val) const`  
`Compare the GarbageCollected tracked object with a supplied value.`
- `bool operator== (const char *const &val) const`  
`Compare the GarbageCollected tracked object with a supplied value.`
- `bool operator== (const Error &val) const`  
`Compare the GarbageCollected tracked object with a supplied value.`
- `bool operator== (const std::nullptr_t &null) const`  
`Compare the GarbageCollected tracked object with a supplied value.`
- `GarbageCollected operator+ (const GarbageCollected &rhs) const`  
`Perform an addition between two GarbageCollected values.`
- `GarbageCollected operator- (const GarbageCollected &rhs) const`  
`Perform a subtraction between two GarbageCollected values.`
- `GarbageCollected operator* (const GarbageCollected &rhs) const`  
`Perform a multiplication between two GarbageCollected values.`
- `GarbageCollected operator/ (const GarbageCollected &rhs) const`  
`Perform a division between two GarbageCollected values.`
- `GarbageCollected operator% (const GarbageCollected &rhs) const`  
`Perform a modulo between two GarbageCollected values.`
- `GarbageCollected operator- () const`  
`Perform a negation on the GarbageCollected value.`
- `GarbageCollected operator! () const`  
`Perform a logical not on the GarbageCollected value.`
- `GarbageCollected operator< (const GarbageCollected &rhs) const`  
`Perform a < between two GarbageCollected values.`
- `GarbageCollected operator<= (const GarbageCollected &rhs) const`

- **GarbageCollected operator<=** (const **GarbageCollected** &rhs) const  
*Perform a <= between two **GarbageCollected** values.*
- **GarbageCollected operator>** (const **GarbageCollected** &rhs) const  
*Perform a > between two **GarbageCollected** values.*
- **GarbageCollected operator>=** (const **GarbageCollected** &rhs) const  
*Perform a >= between two **GarbageCollected** values.*
- **GarbageCollected operator==** (const **GarbageCollected** &rhs) const  
*Perform a == between two **GarbageCollected** values.*
- **GarbageCollected operator!=** (const **GarbageCollected** &rhs) const  
*Perform a != between two **GarbageCollected** values.*

## Static Public Member Functions

- template<class T , typename... Args>  
**static GarbageCollected make** (Args... args)  
*Creates a garbage-collected object of the specified type.*

## Protected Member Functions

- **GarbageCollected ()**  
*Constructs a garbage-collected object of the specified type.*

## Protected Attributes

- **size\_t \* count**  
*The count of references to the tracked object.*
- **ComputedExpression \* ref**  
*A reference to the tracked object.*
- **std::function< void(void)> recycle**  
*A cleanup function to recycle the object.*

## Friends

- **std::ostream & operator<<** (std::ostream &out, const **GarbageCollected** &gc)  
*Add friendly output.*

## 5.49.1 Detailed Description

A container that acts as a resource-counting garbage collector for the specified type.

Uses the **SingletonObjectPool** to created and recycle object memory. The container is not thread-safe.

## 5.49.2 Constructor & Destructor Documentation

### 5.49.2.1 GarbageCollected() [1/3]

```
GarbageCollected::GarbageCollected (
    const GarbageCollected & other )
```

Copy Constructor.

## Parameters

<i>The</i>	other <a href="#">GarbageCollected</a> object to copy.
------------	--

**5.49.2.2 [GarbageCollected\(\)](#) [2/3]**

```
GarbageCollected::GarbageCollected (
    GarbageCollected && other )
```

Move Constructor.

## Parameters

<i>The</i>	other <a href="#">GarbageCollected</a> object to move.
------------	--

**5.49.2.3 [~GarbageCollected\(\)](#)**

```
GarbageCollected::~GarbageCollected ( )
```

Destructor.

Clean up the tracked object, if appropriate.

**5.49.2.4 [GarbageCollected\(\)](#) [3/3]**

```
Tang::GarbageCollected::GarbageCollected ( ) [inline], [protected]
```

Constructs a garbage-collected object of the specified type.

It is private so that a [GarbageCollected](#) object can only be created using the [GarbageCollected::make\(\)](#) function.

## Parameters

<i>variable</i>	The arguments to pass to the constructor of the specified type.
-----------------	---

**5.49.3 Member Function Documentation****5.49.3.1 [isCopyNeeded\(\)](#)**

```
bool GarbageCollected::isCopyNeeded ( ) const
```

Determine whether or not a copy is needed as determined by the referenced [ComputedExpression](#).

#### Returns

Whether or not a copy is needed.

#### 5.49.3.2 make()

```
template<class T , typename... Args>
static GarbageCollected Tang::GarbageCollected::make (
    Args... args ) [inline], [static]
```

Creates a garbage-collected object of the specified type.


#### Parameters

<i>variable</i>	The arguments to pass to the constructor of the specified type.
-----------------	---

#### Returns

A [GarbageCollected](#) object.

Here is the call graph for this function:



#### 5.49.3.3 makeCopy()


```
GarbageCollected GarbageCollected::makeCopy () const
```

Create a separate copy of the original [GarbageCollected](#) value.

**Returns**

A [GarbageCollected](#) copy of the original value.

Here is the call graph for this function:

**5.49.3.4 operator"!"()**


```
GarbageCollected GarbageCollected::operator! ( ) const
```

Perform a logical not on the [GarbageCollected](#) value.

**Returns**

The result of the operation.

Here is the call graph for this function:

**5.49.3.5 operator"!=()**

```
GarbageCollected GarbageCollected::operator!= ( const GarbageCollected & rhs ) const
```

Perform a != between two [GarbageCollected](#) values.


**Parameters**

<i>rhs</i>	The right hand side operand.
------------	------------------------------

**Returns**

The result of the operation.

Here is the call graph for this function:



### 5.49.3.6 operator%()

```
GarbageCollected GarbageCollected::operator% (
    const GarbageCollected & rhs ) const
```

Perform a modulo between two `GarbageCollected` values.


**Parameters**

<i>rhs</i>	The right hand side operand.
------------	------------------------------

**Returns**

The result of the operation.

Here is the call graph for this function:



### 5.49.3.7 operator\*() [1/2]

```
ComputedExpression & GarbageCollected::operator* ( ) const
```

Access the tracked object.

#### Returns

A reference to the tracked object.

### 5.49.3.8 operator\*() [2/2]

```
GarbageCollected GarbageCollected::operator* (   
    const GarbageCollected & rhs ) const
```

Perform a multiplication between two **GarbageCollected** values.


#### Parameters

<i>rhs</i>	The right hand side operand.
------------	------------------------------

#### Returns

The result of the operation.

Here is the call graph for this function:



### 5.49.3.9 operator+()

```
GarbageCollected GarbageCollected::operator+ (   
    const GarbageCollected & rhs ) const
```

Perform an addition between two **GarbageCollected** values.


**Parameters**

<i>rhs</i>	The right hand side operand.
------------	------------------------------

**Returns**

The result of the operation.

Here is the call graph for this function:

**5.49.3.10 operator-() [1/2]**


`GarbageCollected GarbageCollected::operator- ( ) const`

Perform a negation on the `GarbageCollected` value.

**Returns**

The result of the operation.

Here is the call graph for this function:

**5.49.3.11 operator-() [2/2]**

`GarbageCollected GarbageCollected::operator- ( const GarbageCollected & rhs ) const`

Perform a subtraction between two `GarbageCollected` values.


**Parameters**

<i>rhs</i>	The right hand side operand.
------------	------------------------------

**Returns**

The result of the operation.

Here is the call graph for this function:



### 5.49.3.12 operator->()

```
ComputedExpression * GarbageCollected::operator-> ( ) const
```

Access the tracked object as a pointer.

**Returns**

A pointer to the tracked object.

### 5.49.3.13 operator/()

```
GarbageCollected GarbageCollected::operator/ ( const GarbageCollected & rhs ) const
```

Perform a division between two `GarbageCollected` values.


**Parameters**

<i>rhs</i>	The right hand side operand.
------------	------------------------------

**Returns**

The result of the operation.

Here is the call graph for this function:



#### 5.49.3.14 operator<()

```
GarbageCollected GarbageCollected::operator< (\n    const GarbageCollected & rhs ) const
```

Perform a  $<$  between two [GarbageCollected](#) values.


##### Parameters

<i>rhs</i>	The right hand side operand.
------------	------------------------------

##### Returns

The result of the operation.

Here is the call graph for this function:



#### 5.49.3.15 operator<=()

```
GarbageCollected GarbageCollected::operator<= (\n    const GarbageCollected & rhs ) const
```

Perform a  $\leq$  between two [GarbageCollected](#) values.

**Parameters**

<i>rhs</i>	The right hand side operand.
------------	------------------------------

**Returns**

The result of the operation.

**5.49.3.16 operator=() [1/2]**

```
GarbageCollected & GarbageCollected::operator= (
    const GarbageCollected & other )
```

Copy Assignment.

**Parameters**

<i>The</i>	other GarbageCollected object.
------------	--------------------------------

**5.49.3.17 operator=() [2/2]**

```
GarbageCollected & GarbageCollected::operator= (
    GarbageCollected && other )
```

Move Assignment.

**Parameters**

<i>The</i>	other GarbageCollected object.
------------	--------------------------------

**5.49.3.18 operator==( ) [1/8]**

```
bool GarbageCollected::operator== (
    const bool & val ) const
```

Compare the **GarbageCollected** tracked object with a supplied value.

**Parameters**

<i>val</i>	The value to compare the tracked object against.
------------	--

**Returns**

True if they are equal, false otherwise.

**5.49.3.19 operator==(2/8)**

```
bool GarbageCollected::operator== (
    const char *const & val ) const
```

Compare the [GarbageCollected](#) tracked object with a supplied value.

**Parameters**

<i>val</i>	The value to compare the tracked object against.
------------	--

**Returns**

True if they are equal, false otherwise.

**5.49.3.20 operator==(3/8)**

```
bool GarbageCollected::operator== (
    const Error & val ) const
```

Compare the [GarbageCollected](#) tracked object with a supplied value.

**Parameters**

<i>val</i>	The value to compare the tracked object against.
------------	--

**Returns**

True if they are equal, false otherwise.

**5.49.3.21 operator==(4/8)**

```
GarbageCollected GarbageCollected::operator== (
    const GarbageCollected & rhs ) const
```

Perform a == between two [GarbageCollected](#) values.


## Parameters

<i>rhs</i>	The right hand side operand.
------------	------------------------------

## Returns

The result of the operation.

Here is the call graph for this function:



### 5.49.3.22 operator==( ) [5/8]

```
bool GarbageCollected::operator== (
    const std::nullptr_t & null ) const
```

Compare the [GarbageCollected](#) tracked object with a supplied value.

## Parameters

<i>val</i>	The value to compare the tracked object against.
------------	--

## Returns

True if they are equal, false otherwise.

### 5.49.3.23 operator==( ) [6/8]

```
bool GarbageCollected::operator== (
    const std::string & val ) const
```

Compare the [GarbageCollected](#) tracked object with a supplied value.

## Parameters

<i>val</i>	The value to compare the tracked object against.
------------	--

**Returns**

True if they are equal, false otherwise.

**5.49.3.24 operator==(7/8)**

```
bool GarbageCollected::operator== (
    const Tang::float_t & val ) const
```

Compare the [GarbageCollected](#) tracked object with a supplied value.

**Parameters**

<i>val</i>	The value to compare the tracked object against.
------------	--

**Returns**

True if they are equal, false otherwise.

**5.49.3.25 operator==(8/8)**

```
bool GarbageCollected::operator== (
    const Tang::integer_t & val ) const
```

Compare the [GarbageCollected](#) tracked object with a supplied value.


**Parameters**

<i>val</i>	The value to compare the tracked object against.
------------	--

**Returns**

True if they are equal, false otherwise.

Here is the call graph for this function:



### 5.49.3.26 `operator>()`

```
GarbageCollected GarbageCollected::operator> (
    const GarbageCollected & rhs ) const
```

Perform a `>` between two `GarbageCollected` values.

#### Parameters

<code>rhs</code>	The right hand side operand.
------------------	------------------------------

#### Returns

The result of the operation.

### 5.49.3.27 `operator>=()`

```
GarbageCollected GarbageCollected::operator>= (
    const GarbageCollected & rhs ) const
```

Perform a `>=` between two `GarbageCollected` values.


#### Parameters

<code>rhs</code>	The right hand side operand.
------------------	------------------------------

#### Returns

The result of the operation.

Here is the call graph for this function:



## 5.49.4 Friends And Related Function Documentation

#### 5.49.4.1 operator<<

```
std::ostream& operator<< (  
    std::ostream & out,  
    const GarbageCollected & gc ) [friend]
```

Add friendly output.

##### Parameters

<i>out</i>	The output stream.
<i>gc</i>	The <a href="#">GarbageCollected</a> value.

##### Returns

The output stream.

The documentation for this class was generated from the following files:


- [include/garbageCollected.hpp](#)
- [src/garbageCollected.cpp](#)

## 5.50 Tang::HtmlEscape Class Reference


The Flex lexer class for the main Tang language.

```
#include <htmlEscape.hpp>
```

Inheritance diagram for Tang::HtmlEscape:

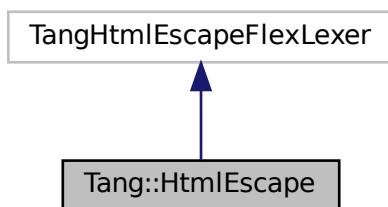

Collaboration diagram for Tang::HtmlEscape:

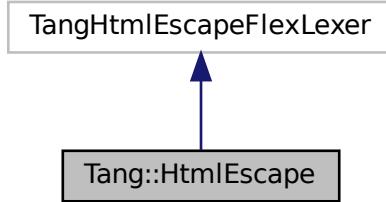

## Public Member Functions

- `HtmlEscape` (std::istream &arg\_yyin, std::ostream &arg\_yyout)  
*The constructor for the Scanner.*
- virtual std::string `get_next_token` ()  
*Extract the next token from the input string.*

### 5.50.1 Detailed Description

The Flex lexer class for the main Tang language.

Flex requires that our lexer class inherit from `yyFlexLexer`, an "intermediate" class whose real name is "TangTangFlexLexer". We are subclassing it so that we can override the return type of `get_next_token()`, for compatibility with Bison 3 tokens.

### 5.50.2 Constructor & Destructor Documentation

#### 5.50.2.1 `HtmlEscape()`

```
Tang::HtmlEscape::HtmlEscape (
    std::istream & arg_yyin,
    std::ostream & arg_yyout ) [inline]
```

The constructor for the Scanner.

The design of the Flex lexer is to tokenize the contents of an input stream, and to write any error messages to an output stream. In our implementation, however, errors are returned differently, so the output stream is never used. Its presence is retained, however, in case it is needed in the future.

For now, the general approach should be to supply the input as a string stream, and to use `std::cout` as the output.

**Parameters**

<i>arg_yyin</i>	The input stream to be tokenized
<i>arg_yyout</i>	The output stream (not currently used)

### 5.50.3 Member Function Documentation

#### 5.50.3.1 `get_next_token()`

```
virtual std::string Tang::HtmlEscape::get_next_token ( ) [virtual]
```

Extract the next token from the input string.

**Returns**

The next unescaped character.

The documentation for this class was generated from the following file:


- [include/htmlEscape.hpp](#)

## 5.51 Tang::HtmlEscapeAscii Class Reference


The Flex lexer class for the main Tang language.

```
#include <htmlEscapeAscii.hpp>
```

Inheritance diagram for Tang::HtmlEscapeAscii:

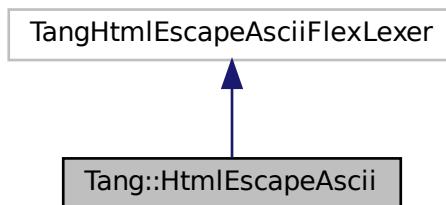

Collaboration diagram for Tang::HtmlEscapeAscii:

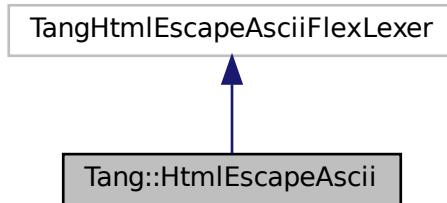

## Public Member Functions

- [HtmlEscapeAscii \(std::istream &arg\\_yyin, std::ostream &arg\\_yyout, \[UnicodeString::Type type\\)\]\(#\)  
\*The constructor for the Scanner.\*](#)
- [virtual std::string get\\_next\\_token \(\)](#)  
*Extract the next token from the input string.*

## Private Attributes

- [UnicodeString::Type type](#)  
*The type of string that is being escaped.*

### 5.51.1 Detailed Description

The Flex lexer class for the main Tang language.

Flex requires that our lexer class inherit from yyFlexLexer, an "intermediate" class whose real name is "TangTangFlexLexer". We are subclassing it so that we can override the return type of [get\\_next\\_token\(\)](#), for compatibility with Bison 3 tokens.

### 5.51.2 Constructor & Destructor Documentation

#### 5.51.2.1 [HtmlEscapeAscii\(\)](#)

```
Tang::HtmlEscapeAscii::HtmlEscapeAscii (
    std::istream & arg_yyin,
    std::ostream & arg_yyout,
    UnicodeString::Type type ) [inline]
```

The constructor for the Scanner.

The design of the Flex lexer is to tokenize the contents of an input stream, and to write any error messages to an output stream. In our implementation, however, errors are returned differently, so the output stream is never used. Its presence is retained, however, in case it is needed in the future.

For now, the general approach should be to supply the input as a string stream, and to use std::cout as the output.

## Parameters

<i>arg_yyin</i>	The input stream to be tokenized
<i>arg_yyout</i>	The output stream (not currently used)

**5.51.3 Member Function Documentation****5.51.3.1 `get_next_token()`**

```
virtual std::string Tang::HtmlEscapeAscii::get_next_token ( ) [virtual]
```

Extract the next token from the input string.

**Returns**

The next unescaped character.

The documentation for this class was generated from the following file:


- [include/htmlEscapeAscii.hpp](#)

**5.52 Tang::location Class Reference**

Two points in a source file.

```
#include <location.hh>
```

Collaboration diagram for Tang::location:

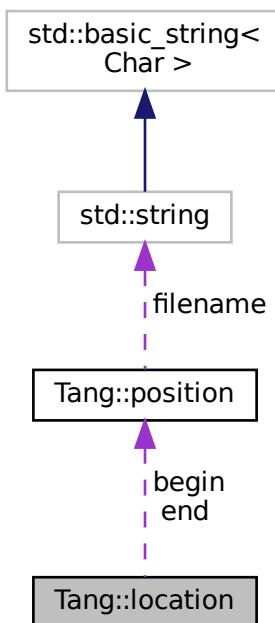

## Public Types

- `typedef position::filename_type filename_type`  
*Type for file name.*
- `typedef position::counter_type counter_type`  
*Type for line and column numbers.*

## Public Member Functions

- `location (const position &b, const position &e)`  
*Construct a location from b to e.*
- `location (const position &p=position())`  
*Construct a 0-width location in p.*
- `location (filename_type *f, counter_type l=1, counter_type c=1)`  
*Construct a 0-width location in f, l, c.*
- `void initialize (filename_type *f=((void *) 0), counter_type l=1, counter_type c=1)`  
*Initialization.*

### Line and Column related manipulators

- `void step ()`  
*Reset initial location to final location.*
- `void columns (counter_type count=1)`  
*Extend the current location to the COUNT next columns.*
- `void lines (counter_type count=1)`  
*Extend the current location to the COUNT next lines.*

## Public Attributes

- `position begin`  
*Beginning of the located region.*
- `position end`  
*End of the located region.*

### 5.52.1 Detailed Description

Two points in a source file.

The documentation for this class was generated from the following file:


- build/generated/location.hh

## 5.53 Tang::PercentEncode Class Reference


The Flex lexer class for the Percent Encode scanner.

```
#include <percentEncode.hpp>
```

Inheritance diagram for Tang::PercentEncode:

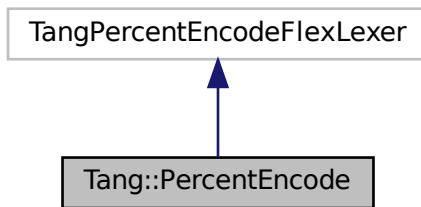

Collaboration diagram for Tang::PercentEncode:

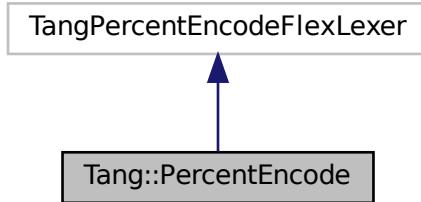

### Public Member Functions

- [PercentEncode](#) (std::istream &arg\_yyin, std::ostream &arg\_yyout)  
*The constructor for the Scanner.*
- virtual std::string [get\\_next\\_token](#) ()  
*Extract the next token from the input string.*

#### 5.53.1 Detailed Description

The Flex lexer class for the Percent Encode scanner.

Flex requires that our lexer class inherit from yyFlexLexer, an "intermediate" class whose real name is "TangPercentEncodeFlexLexer". We are subclassing it so that we can override the return type of [get\\_next\\_token\(\)](#), for compatibility with Bison 3 tokens.

## 5.53.2 Constructor & Destructor Documentation

### 5.53.2.1 PercentEncode()

```
Tang::PercentEncode::PercentEncode (
    std::istream & arg_yyin,
    std::ostream & arg_yyout ) [inline]
```

The constructor for the Scanner.

The design of the Flex lexer is to tokenize the contents of an input stream, and to write any error messages to an output stream. In our implementation, however, errors are returned differently, so the output stream is never used. Its presence is retained, however, in case it is needed in the future.

For now, the general approach should be to supply the input as a string stream, and to use `std::cout` as the output.

#### Parameters

<code>arg_yyin</code>	The input stream to be tokenized
<code>arg_yyout</code>	The output stream (not currently used)

## 5.53.3 Member Function Documentation

### 5.53.3.1 get\_next\_token()

```
virtual std::string Tang::PercentEncode::get_next_token ( ) [virtual]
```

Extract the next token from the input string.

#### Returns

The next unescaped character.

The documentation for this class was generated from the following file:


- [include/percentEncode.hpp](#)

## 5.54 Tang::position Class Reference

A point in a source file.

```
#include <location.hh>
```

## Collaboration diagram for Tang::position:

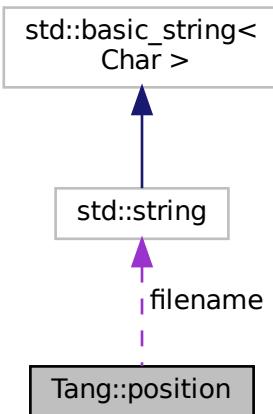

## Public Types

- `typedef const std::string filename_type`  
*Type for file name.*
  - `typedef int counter_type`  
*Type for line and column numbers.*

## Public Member Functions

- **position** (*filename\_type*  $\ast f = (\text{void} \ast) 0$ ), **counter\_type**  $l = 1$ , **counter\_type**  $c = 1$   
*Construct a position.*
  - **void initialize** (*filename\_type*  $\ast fn = (\text{void} \ast) 0$ ), **counter\_type**  $l = 1$ , **counter\_type**  $c = 1$ )  
*Initialization.*

## Line and Column related manipulators

- void **lines** (**counter\_type** count=1)  
*(line related) Advance to the COUNT next lines.*
  - void **columns** (**counter\_type** count=1)  
*(column related) Advance to the COUNT next columns.*

## Public Attributes

- `filename_type * filename`  
*File name to which this position refers.*
- `counter_type line`  
*Current line number.*
- `counter_type column`  
*Current column number.*

## Static Private Member Functions

- static `counter_type add_ (counter_type lhs, counter_type rhs, counter_type min)`  
*Compute max (min, lhs+rhs).*

### 5.54.1 Detailed Description

A point in a source file.

The documentation for this class was generated from the following file:


- `build/generated/location.hpp`

## 5.55 Tang::Program Class Reference

Represents a compiled script or template that may be executed.

```
#include <program.hpp>
```

Collaboration diagram for Tang::Program:

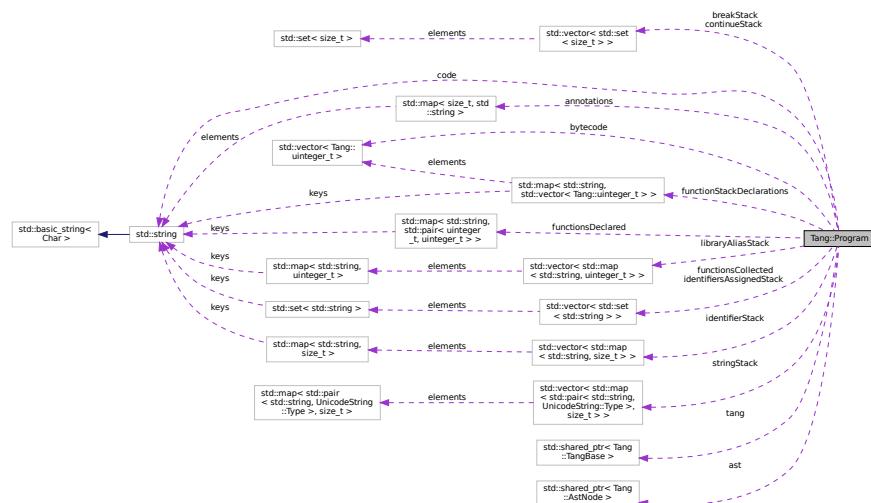

## Public Types

- enum `CodeType` { `Script` , `Template` }
- Indicate the type of code that was supplied to the `Program`.*

## Public Member Functions

- `Program` (const std::string &`code`, `CodeType codeType`, std::shared\_ptr<`Tang::TangBase`> `tang`)  
*Create a compiled program using the provided code.*
- `Program` (std::istream &`code`, `CodeType codeType`, std::shared\_ptr<`Tang::TangBase`> `tang`)  
*Create a compiled program using the provided code.*
- `std::string getCode () const`  
*Get the code that was provided when the `Program` was created.*
- `std::optional< const std::shared_ptr< AstNode > > getAst () const`  
*Get the AST that was generated by the parser.*
- `std::string dumpBytecode () const`  
*Get the OpCodes of the compiled program, formatted like Assembly.*
- `std::optional< const GarbageCollected > getResult () const`  
*Get the result of the `Program` execution, if it exists.*
- `size_t addBytecode (Tang::uinteger_t)`  
*Add a `Tang::uinteger_t` to the Bytecode.*
- `const Bytecode & getBytecode ()`  
*Get the Bytecode vector.*
- `Context execute ()`  
*Execute the program's Bytecode, and return the execution `Context`.*
- `Context execute (ContextData &&data)`  
*Execute the program's Bytecode, and return the execution `Context`.*
- `bool setJumpTarget (size_t opcodeAddress, Tang::uinteger_t jumpTarget)`  
*Set the target address of a Jump opcode.*
- `bool setFunctionStackDeclaration (size_t opcodeAddress, uinteger_t argc, uinteger_t targetPC)`  
*Set the stack details of a function declaration.*
- `void pushEnvironment (const std::shared_ptr< AstNode > &ast)`  
*Create a new compile/execute environment stack entry.*
- `void popEnvironment ()`  
*Remove a compile/execute environment stack entry.*
- `void addIdentifier (const std::string &name, std::optional< size_t > position={})`  
*Add an identifier to the environment.*
- `const std::map< std::string, size_t > & getIdentifiers () const`  
*Get the identifier map of the current environment.*
- `void addLibraryAlias (const std::string &name)`  
*Add a library alias to the environment.*
- `const std::map< std::string, uinteger_t > & getLibraryAliases () const`  
*Get the library alias map of the current environment.*
- `void addIdentifierAssigned (const std::string &name)`  
*Indicate that an identifier will be altered within the associated scope.*
- `const std::set< std::string > & getIdentifiersAssigned () const`  
*Get the set of identifiers that will be assigned in the current scope.*
- `void addString (const std::string &name, UnicodeString::Type)`  
*Add a string to the environment.*
- `const std::map< std::pair< std::string, UnicodeString::Type >, size_t > & getStrings () const`

- **void pushBreakStack ()**

*Get the string map of the current environment.*
- **void addBreak (size\_t location)**

*Increase the break environment stack, so that we can handle nested break-supporting structures.*
- **void popBreakStack (size\_t target)**

*Add the Bytecode location of a break statement, to be set when the final target is known at a later time.*
- **void pushContinueStack ()**

*Increase the continue environment stack, so that we can handle nested continue-supporting structures.*
- **void addContinue (size\_t location)**

*Add the Bytecode location of a continue statement, to be set when the final target is known at a later time.*
- **void popContinueStack (size\_t target)**

*For all continue bytecode locations collected by Tang::addContinue, set the target pc to target.*
- **void setAnnotation (size\_t offset, const std::string &annotation)**

*Set a bytecode annotation.*
- **const OpcodeAnnotations & getAnnotations () const**

*Get the bytecode annotations.*

## Public Attributes

- **std::vector< std::set< std::string > > functionsCollected**

*Names of the functions that are declared in a previous or the current scope.*
- **std::map< std::string, std::pair< uinteger\_t, uinteger\_t > > functionsDeclared**

*Key/value pair of the function declaration information.*
- **std::map< std::string, std::vector< Tang::uinteger\_t > > functionStackDeclarations**

*For each function name, a list of Bytecode addresses that need to be replaced by a function definition.*

## Private Member Functions

- **void parse ()**

*Parse the code into an AST.*
- **void compile ()**

*Compile the AST into Bytecode.*
- **std::pair< OpcodeOffsets, OpcodePositions > analyze () const**

*Analyze the current Bytecode.*
- **void optimize ()**

*Optimize the Bytecode.*

## Private Attributes

- **std::shared\_ptr< Tang::TangBase > tang**

*A pointer to the base Tang class.*
- **std::vector< std::map< std::string, size\_t > > identifierStack**

*Stack of mappings of identifiers to their stack locations.*
- **std::vector< std::map< std::string, uinteger\_t > > libraryAliasStack**

*Stack of library aliases that are used in the program.*
- **std::vector< std::set< std::string > > identifiersAssignedStack**

*Stack of sets of identifiers that are the target of an assignment statement within the associated scope.*
- **std::vector< std::map< std::pair< std::string, UnicodeString::Type >, size\_t > > stringStack**

- `std::vector< std::set< size_t > > breakStack`

*Stack of a collection of break statement locations.*
- `std::vector< std::set< size_t > > continueStack`

*Stack of a collection of continue statement locations.*
- `std::string code`

*The code supplied when the [Program](#) was instantiated.*
- `std::optional< std::istream * > istreamCode`

*An optional istream which supplied the code.*
- `CodeType codeType`

*The type of code that was supplied when the [Program](#) was instantiated.*
- `std::shared_ptr< AstNode > ast`

*A pointer to the AST, if parsing was successful.*
- `Bytecode bytecode`

*The Bytecode of the compiled program.*
- `std::optional< GarbageCollected > result`

*The result of the [Program](#) compilation.*
- `OpcodeAnnotations annotations`

*Bytecode annotations.*

### 5.55.1 Detailed Description

Represents a compiled script or template that may be executed.

### 5.55.2 Member Enumeration Documentation

#### 5.55.2.1 CodeType

```
enum Tang::Program::CodeType
```

Indicate the type of code that was supplied to the [Program](#).

Enumerator

Script	The code is pure Tang script, without any templating.
Template	The code is a template.

### 5.55.3 Constructor & Destructor Documentation

### 5.55.3.1 Program() [1/2]

```
Program::Program (
    const std::string & code,
    Program::CodeType codeType,
    std::shared_ptr< Tang::TangBase > tang )
```

Create a compiled program using the provided code.

#### Parameters

<i>code</i>	The code to be compiled.
<i>codeType</i>	Whether the code is a Script or Template.
<i>tang</i>	A pointer to the base Tang class.

### 5.55.3.2 Program() [2/2]

```
Program::Program (
    std::istream & code,
    Program::CodeType codeType,
    std::shared_ptr< Tang::TangBase > tang )
```

Create a compiled program using the provided code.

#### Parameters

<i>code</i>	An istream to the code to be compiled.
<i>codeType</i>	Whether the code is a Script or Template.
<i>tang</i>	A pointer to the base Tang class.

## 5.55.4 Member Function Documentation

### 5.55.4.1 addBreak()

```
void Program::addBreak (
    size_t location )
```

Add the Bytecode location of a `break` statement, to be set when the final target is known at a later time.

#### Parameters

<i>location</i>	The offset location of the <code>break</code> bytecode.
-----------------	---

#### 5.55.4.2 addBytecode()

```
size_t Program::addBytecode (
    Tang::uinteger_t op )
```

Add a Tang::uinteger\_t to the Bytecode.

##### Parameters

<i>op</i>	The value to add to the Bytecode.
-----------	-----------------------------------

##### Returns

The size of the bytecode structure.

#### 5.55.4.3 addContinue()

```
void Program::addContinue (
    size_t location )
```

Add the Bytecode location of a `continue` statement, to be set when the final target is known at a later time.

##### Parameters

<i>location</i>	The offset location of the <code>continue</code> bytecode.
-----------------	--

#### 5.55.4.4 addIdentifier()

```
void Program::addIdentifier (
    const std::string & name,
    std::optional< size_t > position = {} )
```

Add an identifier to the environment.

##### Parameters

<i>name</i>	The variable to add to the environment.
<i>position</i>	If provided, the desired position to place the identifier.

#### 5.55.4.5 addIdentifierAssigned()

```
void Program::addIdentifierAssigned (
    const std::string & name )
```

Indicate that an identifier will be altered within the associated scope.

##### Parameters

<i>name</i>	The identifier name.
-------------	----------------------

#### 5.55.4.6 addLibraryAlias()

```
void Program::addLibraryAlias (
    const std::string & name )
```

Add a library alias to the environment.

##### Parameters

<i>name</i>	The library alias to add to the environment.
-------------	--

#### 5.55.4.7 addString()

```
void Program::addString (
    const std::string & name,
    UnicodeString::Type type )
```

Add a string to the environment.

##### Parameters

<i>name</i>	The variable to add to the environment.
<i>type</i>	The <a href="#">UnicodeString::Type</a> of the string.

#### 5.55.4.8 dumpBytecode()

```
string Program::dumpBytecode ( ) const
```

Get the OpCodes of the compiled program, formatted like Assembly.

**Returns**

A string containing the Opcode representation.

**5.55.4.9 execute() [1/2]**

```
Context Program::execute ( )
```

Execute the program's Bytecode, and return the execution [Context](#).

A default ContextData will be generated for the execution.

**Returns**

The execution [Context](#).

**5.55.4.10 execute() [2/2]**

```
Context Program::execute ( ContextData && data )
```

Execute the program's Bytecode, and return the execution [Context](#).


**Parameters**

<i>data</i>	The default data to be made available to the execution <a href="#">Context</a> .
-------------	--

**Returns**

The execution [Context](#).

Here is the call graph for this function:

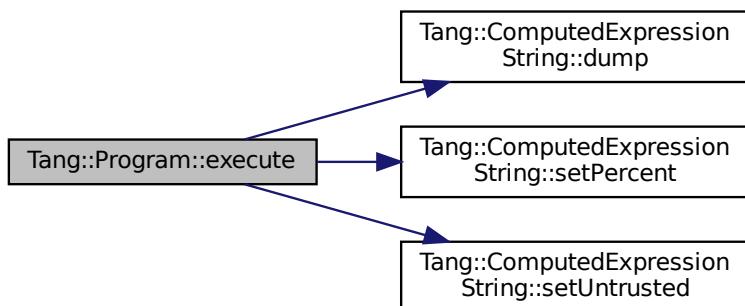

#### 5.55.4.11 `getAnnotations()`

```
const map< size_t, string > & Program::getAnnotations ( ) const
```

Get the bytecode annotations.

##### Returns

A map of bytecode offsets to their associated annotation.

#### 5.55.4.12 `getAst()`

```
optional< const shared_ptr< AstNode > > Program::getAst ( ) const
```

Get the AST that was generated by the parser.

The parser may have failed, so the return is an `optional<>` type. If the compilation failed, check `Program::error`.

##### Returns

A pointer to the AST, if it exists.

#### 5.55.4.13 `getBytecode()`

```
const Bytecode & Program::getBytecode ( )
```

Get the Bytecode vector.

##### Returns

The Bytecode vector.

#### 5.55.4.14 `getCode()`

```
string Program::getCode ( ) const
```

Get the code that was provided when the `Program` was created.

##### Returns

The source code from which the `Program` was created.

#### 5.55.4.15 `getIdentifiers()`

```
const map< string, size_t > & Program::getIdentifiers ( ) const
```

Get the identifier map of the current environment.

##### Returns

A map of each identifier name to its stack position within the current environment.

#### 5.55.4.16 `getIdentifiersAssigned()`

```
const set< string > & Program::getIdentifiersAssigned ( ) const
```

Get the set of identifiers that will be assigned in the current scope.

##### Returns

A set of identifier names that have been identified as the target of an assignment operator within the current scope.

#### 5.55.4.17 `getLibraryAliases()`

```
const map< string, uinteger_t > & Program::getLibraryAliases ( ) const
```

Get the library alias map of the current environment.

##### Returns

A map of each library alias to its stack position within the current environment.

#### 5.55.4.18 `getResult()`

```
optional< const GarbageCollected > Program::getResult ( ) const
```

Get the result of the [Program](#) execution, if it exists.

##### Returns

The result of the [Program](#) execution, if it exists.

#### 5.55.4.19 `getStrings()`

```
const map< pair< string, UnicodeString::Type >, size_t > & Program::getStrings ( ) const
```

Get the string map of the current environment.

##### Returns

A map of each identifier name to its stack position within the current environment.

#### 5.55.4.20 `popBreakStack()`

```
void Program::popBreakStack ( size_t target )
```

For all `continue` bytecode locations collected by `Tang::addContinue`, set the target pc to `target`.

##### Parameters

<code>target</code>	The target bytecode offset that the <code>continue</code> should jump to.
---------------------	---

Here is the call graph for this function:



#### 5.55.4.21 `popContinueStack()`

```
void Program::popContinueStack ( size_t target )
```

For all `continue` bytecode locations collected by `Tang::addContinue`, set the target pc to `target`.

##### Parameters

<code>target</code>	The target bytecode offset that the <code>continue</code> should jump to.
---------------------	---

Here is the call graph for this function:



#### 5.55.4.22 pushEnvironment()


```
void Program::pushEnvironment (
    const std::shared_ptr< AstNode > & ast )
```

Create a new compile/execute environment stack entry.

##### Parameters

<code>ast</code>	The ast node from which this new environment will be formed.
------------------	--

Here is the call graph for this function:

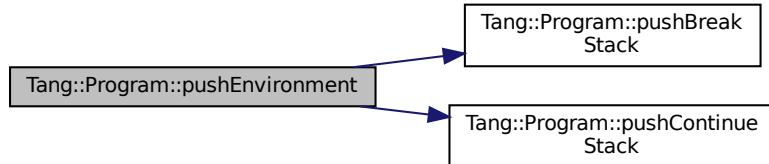

#### 5.55.4.23 setAnnotation()

```
void Program::setAnnotation (
    size_t offset,
    const std::string & annotation )
```

Set a bytecode annotation.

##### Parameters

<code>offset</code>	The bytecode offset to associate with the annotation.
<code>annotation</code>	The annotation for the bytecode offset.

#### 5.55.4.24 setFunctionStackDeclaration()

```
bool Program::setFunctionStackDeclaration (
    size_t opcodeAddress,
    uinteger_t argc,
    uinteger_t targetPC )
```

Set the stack details of a function declaration.

##### Parameters

<i>opcodeAddress</i>	The location of the FUNCTION opcode.
<i>argc</i>	The argument count to set.
<i>targetPC</i>	The bytecode address of the start of the function.

#### 5.55.4.25 setJumpTarget()

```
bool Program::setJumpTarget (
    size_t opcodeAddress,
    Tang::uinteger_t jumpTarget )
```

Set the target address of a Jump opcode.

##### Parameters

<i>opcodeAddress</i>	The location of the jump statement.
<i>jumpTarget</i>	The address to jump to.

##### Returns

Whether or not the jumpTarget was set.

### 5.55.5 Member Data Documentation

#### 5.55.5.1 functionsDeclared

```
std::map<std::string, std::pair<uinteger_t, uinteger_t> > Tang::Program::functionsDeclared
```

Key/value pair of the function declaration information.

The key is the name of the function. The value is a pair of the `argc` value and the `targetPC` value.

The documentation for this class was generated from the following files:


- [include/program.hpp](#)
- [src/program-analyze.cpp](#)
- [src/program-dumpBytecode.cpp](#)
- [src/program-execute.cpp](#)
- [src/program-optimize.cpp](#)
- [src/program.cpp](#)

## 5.56 Tang::SingletonObjectPool< T > Class Template Reference

A thread-safe, singleton object pool of the designated type.

```
#include <singletonObjectPool.hpp>
```

Collaboration diagram for Tang::SingletonObjectPool< T >:

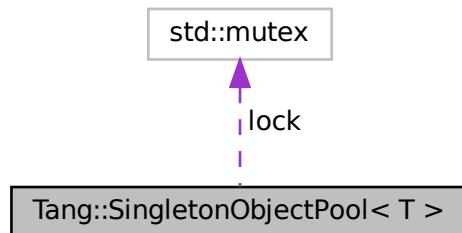

### Public Member Functions

- [T \\* get \(\)](#)  
*Request an uninitialized memory location from the pool for an object T.*
- [void recycle \(T \\*obj\)](#)  
*Recycle a memory location for an object T.*
- [~SingletonObjectPool \(\)](#)  
*Destructor.*

### Static Public Member Functions

- [static SingletonObjectPool< T > & getInstance \(\)](#)  
*Get the singleton instance of the object pool.*

### Private Member Functions

- [SingletonObjectPool \(\)](#)  
*The constructor, hidden from being directly called.*
- [SingletonObjectPool \(const SingletonObjectPool &other\)](#)  
*The copy constructor, hidden from being called.*

## Private Attributes

- `T ** allocations`  
*C-array of allocated blocks, each block contains GROW objects.*
- `int currentAllocation`  
*Index into allocations, representing the current block supplying non-recycled memory addresses.*
- `size_t currentIndex`  
*Current location (within the most recently allocated block) of an available T\*.*
- `int currentRecycledAllocation`  
*Index into allocations, representing the current block tracking the recycled memory addresses.*
- `int currentRecycledIndex`  
*Current location (within the currentRecycledAllocation block) of the last available T\*.*

## Static Private Attributes

- `static std::mutex lock`  
*A mutex for thread-safety.*

### 5.56.1 Detailed Description

```
template<class T>
class Tang::SingletonObjectPool< T >
```

A thread-safe, singleton object pool of the designated type.

### 5.56.2 Member Function Documentation

#### 5.56.2.1 get()

```
template<class T >
T* Tang::SingletonObjectPool< T >::get ( ) [inline]
```

Request an uninitialized memory location from the pool for an object T.

##### Returns

An uninitialized memory location for an object T.

### 5.56.2.2 getInstance()

```
template<class T >
static SingletonObjectPool<T>& Tang::SingletonObjectPool< T >::getInstance ( ) [inline],
[static]
```

Get the singleton instance of the object pool.

#### Returns

The singleton instance of the object pool.

### 5.56.2.3 recycle()

```
template<class T >
void Tang::SingletonObjectPool< T >::recycle (
    T * obj ) [inline]
```

Recycle a memory location for an object T.

#### Parameters

<i>obj</i>	The memory location to recycle.
------------	---------------------------------

## 5.56.3 Member Data Documentation

### 5.56.3.1 currentIndex

```
template<class T >
size_t Tang::SingletonObjectPool< T >::currentIndex [private]
```

Current location (within the most recently allocated block) of an available T\*.

If currentIndex == GROW, then a new block needs to be allocated.

### 5.56.3.2 currentRecycledIndex

```
template<class T >
int Tang::SingletonObjectPool< T >::currentRecycledIndex [private]
```

Current location (within the currentRecycledAllocation block) of the last available T\*.

If currentRecycledIndex == GROW, then we must move to the next currentRecycledAllocation.

The documentation for this class was generated from the following file:


- [include/SingletonObjectPool.hpp](#)

## 5.57 Tang::TangBase Class Reference


The base class for the Tang programming language.

```
#include <tangBase.hpp>
```

Inheritance diagram for Tang::TangBase:

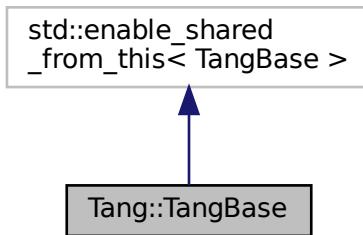

Collaboration diagram for Tang::TangBase:

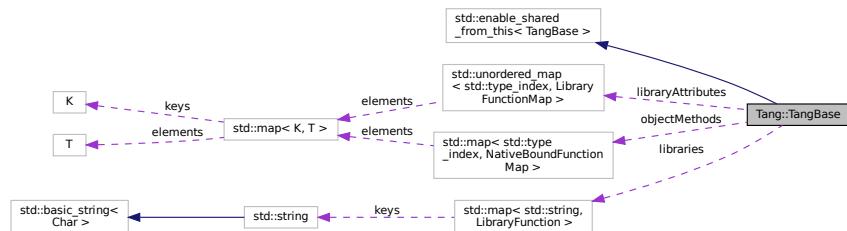

### Public Member Functions

- **Program compileScript (const std::string &script)**  
*Compile the provided text as a script and return a [Program](#).*
- **Program compileScript (std::istream &script)**  
*Compile the provided text as a script and return a [Program](#).*
- **Program compileTemplate (const std::string &code)**  
*Compile the provided text as a template and return a [Program](#).*
- **Program compileTemplate (std::istream &code)**  
*Compile the provided text as a template and return a [Program](#).*
- **TangBase ()**  
*The constructor.*
- **std::map< std::type\_index, NativeBoundFunctionMap > & getObjectMethods ()**  
*Get the object methods available to this instance of the base language object.*
- **LibraryFunctionMap & getLibraries ()**  
*Get the libraries available to this instance of the base language object.*
- **std::unordered\_map< std::type\_index, LibraryFunctionMap > & getLibraryAttributes ()**  
*Get the library attributes available to this instance of the base language object.*

## Static Public Member Functions

- static std::shared\_ptr< [TangBase](#) > [make\\_shared\(\)](#)  
*Create an instance of Tang and return a reference to it as a shared pointer.*

## Private Attributes

- std::map< std::type\_index, NativeBoundFunctionMap > [objectMethods](#)  
*Store the available object methods.*
- [LibraryFunctionMap](#) [libraries](#)  
*Store the available libraries.*
- std::unordered\_map< std::type\_index, LibraryFunctionMap > [libraryAttributes](#)  
*Store the available library attributes.*

### 5.57.1 Detailed Description

The base class for the Tang programming language.

This class is the fundamental starting point to compile and execute a Tang program. It may be considered in three parts:

1. It acts as an extendable interface through which additional "library" functions can be added to the language.  
It is intentionally designed that each instance of [TangBase](#) will have its own library functions.
2. It provides methods to compile scripts and templates, resulting in a [Program](#) object.
3. The [Program](#) object may then be executed, providing instance-specific context information (i.e., state).

### 5.57.2 Constructor & Destructor Documentation

#### 5.57.2.1 [TangBase\(\)](#)

```
TangBase::TangBase ( )
```

The constructor.

This function should never be called directly. Rather, always use the [Tang::TangBase::make\\_shared\(\)](#) static method, which supplies the shared pointer necessary for creation of [Program](#) objects.

### 5.57.3 Member Function Documentation

#### 5.57.3.1 [compileScript\(\)](#) [1/2]

```
Program TangBase::compileScript (  
    const std::string & script )
```

Compile the provided text as a script and return a [Program](#).

**Parameters**

<code>script</code>	The Tang script to be compiled.
---------------------	---------------------------------

**Returns**

The [Program](#) object representing the compiled script.

**5.57.3.2 compileScript() [2/2]**

```
Program TangBase::compileScript (
    std::istream & script )
```

Compile the provided text as a script and return a [Program](#).

**Parameters**

<code>script</code>	An istream to the Tang script to be compiled.
---------------------	---

**Returns**

The [Program](#) object representing the compiled script.

**5.57.3.3 compileTemplate() [1/2]**

```
Program TangBase::compileTemplate (
    const std::string & code )
```

Compile the provided text as a template and return a [Program](#).

**Parameters**

<code>code</code>	The Tang template to be compiled.
-------------------	-----------------------------------

**Returns**

The [Program](#) object representing the compiled template.

**5.57.3.4 compileTemplate() [2/2]**

```
Program TangBase::compileTemplate (
    std::istream & code )
```

Compile the provided text as a template and return a [Program](#).

**Parameters**

<code>code</code>	An istream to the Tang template to be compiled.
-------------------	---

**Returns**

The [Program](#) object representing the compiled template.

### 5.57.3.5 `make_shared()`

```
shared_ptr< TangBase > TangBase::make_shared ( ) [static]
```

Create an instance of Tang and return a reference to it as a shared pointer.

**Returns**

A shared pointer to the base Tang object.

The documentation for this class was generated from the following files:


- [include/tangBase.hpp](#)
- [src/tangBase.cpp](#)

## 5.58 Tang::TangScanner Class Reference


The Flex lexer class for the main Tang language.

```
#include <tangScanner.hpp>
```

Inheritance diagram for Tang::TangScanner:

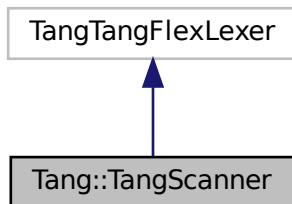

Collaboration diagram for Tang::TangScanner:

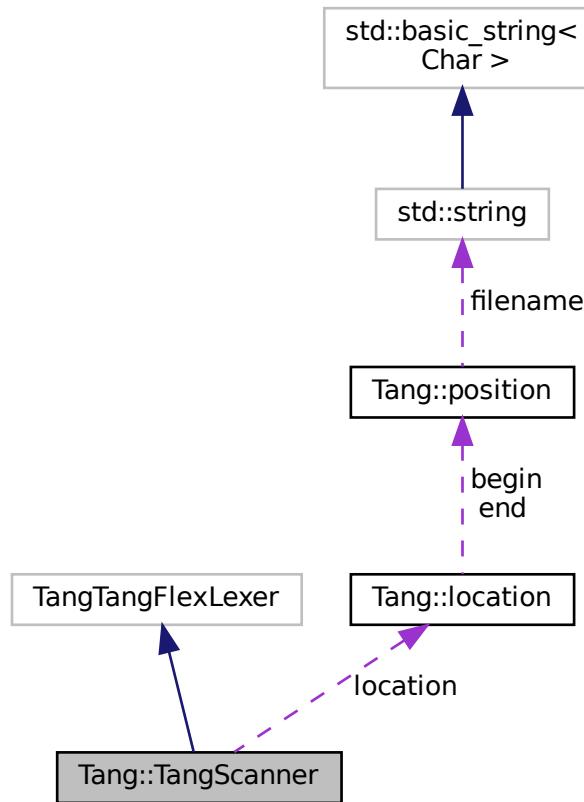

## Public Member Functions

- [TangScanner \(std::istream &arg\\_yyin, std::ostream &arg\\_yyout\)](#)  
*The constructor for the Scanner.*
- [virtual Tang::TangParser::symbol\\_type get\\_next\\_token \(\)](#)  
*A pass-through function that we supply so that we can provide a Bison 3 token return type instead of the int that is returned by the default class configuration.*
- [void setModeTemplate \(\)](#)  
*Helper function to set the scanner to template parsing mode.*

## Private Attributes

- [Tang::location location](#)  
*The location information of the token that is identified.*

### 5.58.1 Detailed Description

The Flex lexer class for the main Tang language.

Flex requires that our lexer class inherit from yyFlexLexer, an "intermediate" class whose real name is "TangTangFlexLexer". We are subclassing it so that we can override the return type of [get\\_next\\_token\(\)](#), for compatibility with Bison 3 tokens.

## 5.58.2 Constructor & Destructor Documentation

### 5.58.2.1 `TangScanner()`

```
Tang::TangScanner::TangScanner (
    std::istream & arg_yyin,
    std::ostream & arg_yyout ) [inline]
```

The constructor for the Scanner.

The design of the Flex lexer is to tokenize the contents of an input stream, and to write any error messages to an output stream. In our implementation, however, errors are returned differently, so the output stream is never used. Its presence is retained, however, in case it is needed in the future.

For now, the general approach should be to supply the input as a string stream, and to use `std::cout` as the output.

#### Parameters

<i>arg_yyin</i>	The input stream to be tokenized
<i>arg_yyout</i>	The output stream (not currently used)

## 5.58.3 Member Function Documentation

### 5.58.3.1 `get_next_token()`

```
virtual Tang::TangParser::symbol_type Tang::TangScanner::get_next_token ( ) [virtual]
```

A pass-through function that we supply so that we can provide a Bison 3 token return type instead of the `int` that is returned by the default class configuration.

#### Returns

A Bison 3 token representing the lexeme that was recognized.

The documentation for this class was generated from the following file:


- [include/tangScanner.hpp](#)

## 5.59 Tang::Unescape Class Reference


The Flex lexer class for the main Tang language.

```
#include <unescape.hpp>
```

Inheritance diagram for Tang::Unescape:

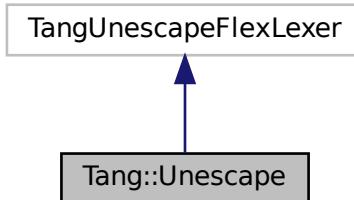

Collaboration diagram for Tang::Unescape:

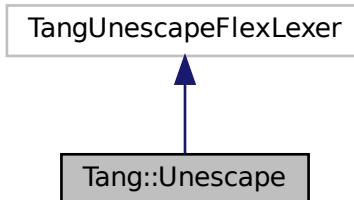

### Public Member Functions

- [Unescape](#) (std::istream &arg\_yyin, std::ostream &arg\_yyout)  
*The constructor for the Scanner.*
- virtual std::string [get\\_next\\_token](#) ()  
*Extract the next token from the input string.*

#### 5.59.1 Detailed Description

The Flex lexer class for the main Tang language.

Flex requires that our lexer class inherit from yyFlexLexer, an "intermediate" class whose real name is "TangTangFlexLexer". We are subclassing it so that we can override the return type of [get\\_next\\_token\(\)](#), for compatibility with Bison 3 tokens.

## 5.59.2 Constructor & Destructor Documentation

### 5.59.2.1 Unescape()

```
Tang::Unescape::Unescape (
    std::istream & arg_yyin,
    std::ostream & arg_yyout ) [inline]
```

The constructor for the Scanner.

The design of the Flex lexer is to tokenize the contents of an input stream, and to write any error messages to an output stream. In our implementation, however, errors are returned differently, so the output stream is never used. Its presence is retained, however, in case it is needed in the future.

For now, the general approach should be to supply the input as a string stream, and to use `std::cout` as the output.

#### Parameters

<code>arg_yyin</code>	The input stream to be tokenized
<code>arg_yyout</code>	The output stream (not currently used)

## 5.59.3 Member Function Documentation

### 5.59.3.1 get\_next\_token()

```
virtual std::string Tang::Unescape::get_next_token ( ) [virtual]
```

Extract the next token from the input string.

#### Returns

The next unescaped character.

The documentation for this class was generated from the following file:


- [include/unescape.hpp](#)

## 5.60 `Tang::UnicodeString` Class Reference

Represents a UTF-8 encoded string that is Unicode-aware.

```
#include <unicodeString.hpp>
```

Collaboration diagram for `Tang::UnicodeString`:

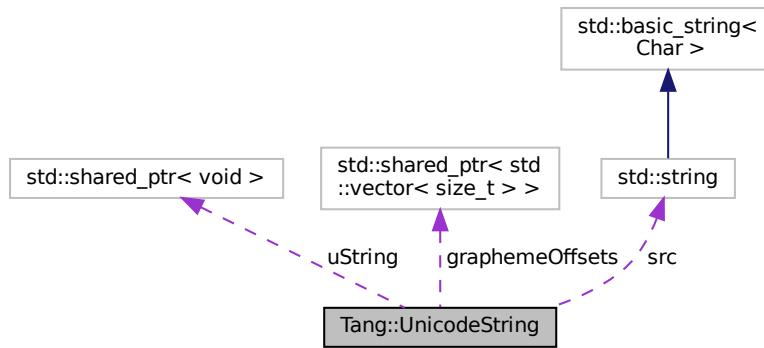

### Public Types

- enum `Type` { `Trusted` , `Untrusted` , `Percent` }

*The types of string being created.*

### Public Member Functions

- `UnicodeString ()`  
*Construct an empty `Tang::UnicodeString` object, which acts as the interface to the ICU library.*
- `UnicodeString (const UnicodeString &source)`  
*Construct a `Tang::UnicodeString` object, from an existing `Tang::UnicodeString`.*
- `UnicodeString (const std::string &source)`  
*Construct a `Tang::UnicodeString` object, from an existing `std::string`.*
- `std::string substr (size_t position, size_t length) const`  
*Return a Unicode grapheme-aware substring.*
- `bool operator== (const UnicodeString &rhs) const`  
*Compare two `UnicodeString`s.*
- `bool operator< (const UnicodeString &rhs) const`  
*Compare two `UnicodeString`s.*
- `UnicodeString operator+ (const UnicodeString &rhs) const`  
*Create a new `UnicodeString` that is the concatenation of two `UnicodeString`s.*
- `UnicodeString & operator+= (const UnicodeString &rhs)`  
*Concatenate the `rhs` `UnicodeString` to the current `UnicodeString`.*
- `operator std::string () const`  
*Cast the current `UnicodeString` object to a `std::string`, UTF-8 encoded.*
- `size_t length () const`

- `size_t bytesLength () const`  
*Return the length of the [UnicodeString](#) in graphemes.*
- `std::string render () const`  
*Return the length of the [UnicodeString](#) in bytes.*
- `std::string renderAsHtml () const`  
*Render the string in with dangerous characters HTML encoded, if the string is [UnicodeString::Type::Untrusted](#).*
- `std::string renderAscii () const`  
*Render the string in with all characters converted to an ASCII representation.*
- `void setUntrusted ()`  
*Set the string as [UnicodeString::Type::Untrusted](#).*
- `void setPercent ()`  
*Set the string as [UnicodeString::Type::Percent](#).*

## Private Member Functions

- `void generateCachedValues () const`  
*Calculate cachable values for the object.*

## Private Attributes

- `std::string src`  
*The UTF-8 encoded string.*
- `UnicodeString::Type type`  
*The type of string being stored.*
- `std::shared_ptr< std::vector< size_t > > graphemeOffsets`  
*Cache of the grapheme offsets, if they happen to be calculated.*
- `std::shared_ptr< void > uString`  
*Cache of the ICU Unicode string.*

### 5.60.1 Detailed Description

Represents a UTF-8 encoded string that is Unicode-aware.

This class serves as the interface between the Tang language and the ICU library.

### 5.60.2 Member Enumeration Documentation

#### 5.60.2.1 Type

```
enum Tang::UnicodeString::Type
```

The types of string being created.

## Enumerator

Trusted	String is from a trusted source.
Untrusted	String is not from a trusted source.
Percent	String is to be percent encoded.

**5.60.3 Member Function Documentation****5.60.3.1 bytesLength()**

```
size_t UnicodeString::bytesLength ( ) const
```

Return the length of the [UnicodeString](#) in bytes.

Note: this is *not* the number of codepoints or graphemes, but is the actual number of bytes in memory.

**Returns**

Returns the length of the [UnicodeString](#) in bytes.

**5.60.3.2 length()**

```
size_t UnicodeString::length ( ) const
```


Return the length of the [UnicodeString](#) in graphemes.

Note: this is *not* the number of bytes, chars, or codepoints, but is the length in graphemes, as defined by ICU.

**Returns**

Returns the length of the [UnicodeString](#) in graphemes.

Here is the call graph for this function:



### 5.60.3.3 operator std::string()

```
UnicodeString::operator std::string ( ) const
```

Cast the current [UnicodeString](#) object to a std::string, UTF-8 encoded.

#### Returns

Returns the std::string version of the [UnicodeString](#).

### 5.60.3.4 operator+()

```
UnicodeString UnicodeString::operator+ (  
    const UnicodeString & rhs ) const
```

Create a new [UnicodeString](#) that is the concatenation of two UnicodeStrings.

#### Parameters

<i>rhs</i>	The string to append to the current object string.
------------	--

#### Returns

Returns the result of the concatenation.

### 5.60.3.5 operator+=()

```
UnicodeString & UnicodeString::operator+= (   
    const UnicodeString & rhs )
```

Concatenate the *rhs* [UnicodeString](#) to the current [UnicodeString](#).

#### Parameters

<i>rhs</i>	The string to append to the current object string.
------------	--

#### Returns

Returns the result of the concatenation.

### 5.60.3.6 operator<()

```
bool UnicodeString::operator< (
    const UnicodeString & rhs ) const
```

Compare two UnicodeStrings.

#### Parameters

<i>rhs</i>	The string to compare against.
------------	--------------------------------

#### Returns

Returns true if the rhs string is greater than or equal to the object string.

### 5.60.3.7 operator==( )

```
bool UnicodeString::operator== (
    const UnicodeString & rhs ) const
```

Compare two UnicodeStrings.

#### Parameters

<i>rhs</i>	The string to compare against.
------------	--------------------------------

#### Returns

Returns true if the two strings are equal.

### 5.60.3.8 render()


```
string UnicodeString::render ( ) const
```

Render the string in with dangerous characters HTML encoded, if the string is UnicodeString::Type::Untrusted.

**Returns**

The rendered string, according to its type.

Here is the call graph for this function:

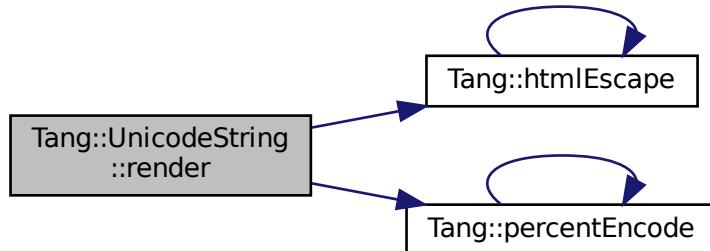**5.60.3.9 renderAscii()**

```
string UnicodeString::renderAscii ( ) const
```


Render the string in with all characters converted to an ASCII representation.

The dangerous characters will not be HTML encoded, if the string is `UnicodeString::Type::Trusted`.

**Returns**

The rendered string, according to its type.

Here is the call graph for this function:

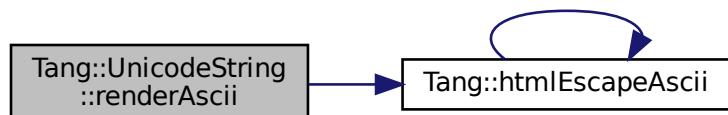**5.60.3.10 substr()**

```
std::string UnicodeString::substr (
    size_t position,
    size_t length ) const
```

Return a Unicode grapheme-aware substring.


**Parameters**

<i>position</i>	The 0-based position of the first grapheme.
<i>length</i>	The maximum number of graphemes to return.

**Returns**

The requested substring.

Here is the call graph for this function:

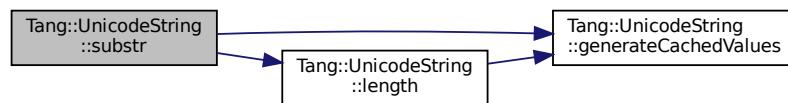

The documentation for this class was generated from the following files:

- [include/unicodeString.hpp](#)
- [src/unicodeString.cpp](#)




# Chapter 6

## File Documentation

### 6.1 build/generated/location.hh File Reference

Define the Tang ::location class.

```
#include <iostream>
#include <string>
Include dependency graph for location.hh:
```

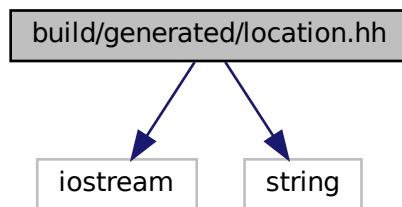

This graph shows which files directly or indirectly include this file:



### Classes

- class [Tang::position](#)  
*A point in a source file.*
- class [Tang::location](#)  
*Two points in a source file.*

## Macros

- `#define YY_NULLPTR ((void*)0)`

## Functions

- `position & Tang::operator+= (position &res, position::counter_type width)`  
*Add width columns, in place.*
- `position Tang::operator+ (position res, position::counter_type width)`  
*Add width columns.*
- `position & Tang::operator-= (position &res, position::counter_type width)`  
*Subtract width columns, in place.*
- `position Tang::operator- (position res, position::counter_type width)`  
*Subtract width columns.*
- `template<typename YYChar >`  
`std::basic_ostream< YYChar > & Tang::operator<< (std::basic_ostream< YYChar > &ostr, const position &pos)`  
*Intercept output stream redirection.*
- `location & Tang::operator+= (location &res, const location &end)`  
*Join two locations, in place.*
- `location Tang::operator+ (location res, const location &end)`  
*Join two locations.*
- `location & Tang::operator+= (location &res, location::counter_type width)`  
*Add width columns to the end position, in place.*
- `location Tang::operator+ (location res, location::counter_type width)`  
*Add width columns to the end position.*
- `location & Tang::operator-= (location &res, location::counter_type width)`  
*Subtract width columns to the end position, in place.*
- `location Tang::operator- (location res, location::counter_type width)`  
*Subtract width columns to the end position.*
- `template<typename YYChar >`  
`std::basic_ostream< YYChar > & Tang::operator<< (std::basic_ostream< YYChar > &ostr, const location &loc)`  
*Intercept output stream redirection.*

### 6.1.1 Detailed Description

Define the `Tang ::location` class.

### 6.1.2 Function Documentation

#### 6.1.2.1 operator<<() [1/2]

```
template<typename YYChar >
std::basic_ostream<YYChar>& Tang::operator<< (
    std::basic_ostream< YYChar > & ostr,
    const location & loc )
```

Intercept output stream redirection.

## Parameters

<i>ostr</i>	the destination output stream
<i>loc</i>	a reference to the location to redirect

Avoid duplicate information.

6.1.2.2 `operator<<()` [2/2]

```
template<typename YYChar >
std::basic_ostream<YYChar>& Tang::operator<< (
    std::basic_ostream< YYChar > & ostr,
    const position & pos )
```

Intercept output stream redirection.


## Parameters

<i>ostr</i>	the destination output stream
<i>pos</i>	a reference to the position to redirect

## 6.2 include/astNode.hpp File Reference

Declare the [Tang::AstNode](#) base class.

```
#include <memory>
#include <string>
#include "location.hh"
#include "macros.hpp"
Include dependency graph for astNode.hpp:
```

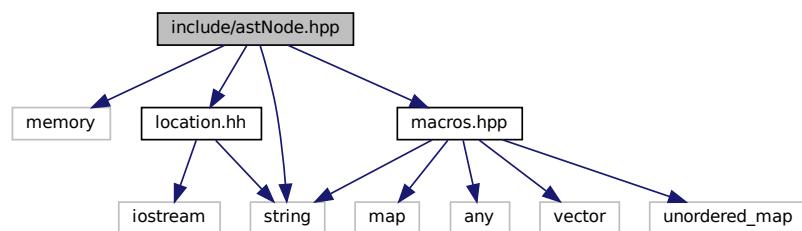

This graph shows which files directly or indirectly include this file:



## Classes

- class [Tang::AstNode](#)  
*Base class for representing nodes of an Abstract Syntax Tree (AST).*


### 6.2.1 Detailed Description

Declare the [Tang::AstNode](#) base class.


## 6.3 include/astNodeArray.hpp File Reference

Declare the [Tang::AstNodeArray](#) class.

```
#include <vector>
#include "astNode.hpp"
Include dependency graph for astNodeArray.hpp:
```

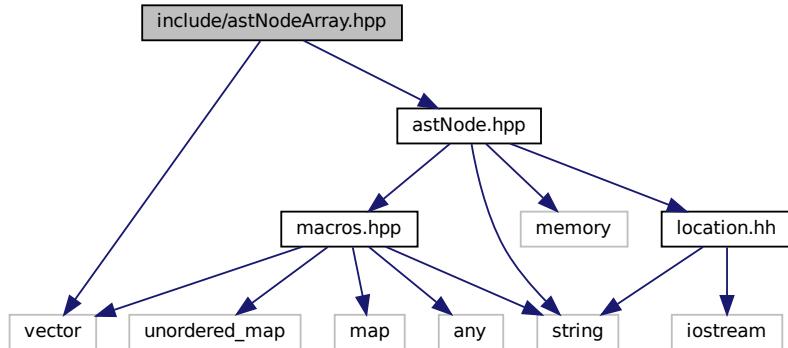

This graph shows which files directly or indirectly include this file:

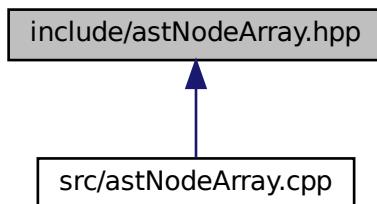

## Classes

- class [Tang::AstNodeArray](#)  
*An [AstNode](#) that represents an array literal.*


### 6.3.1 Detailed Description

Declare the [Tang::AstNodeArray](#) class.


## 6.4 include/astNodeAssign.hpp File Reference

Declare the [Tang::AstNodeAssign](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeAssign.hpp:
```

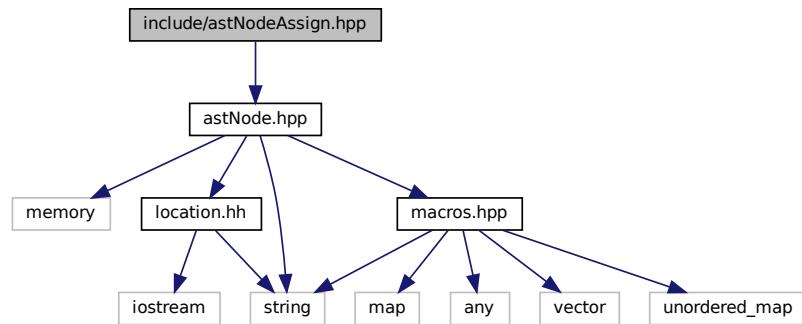

This graph shows which files directly or indirectly include this file:

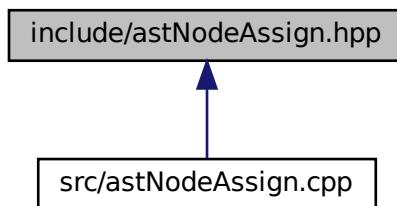

## Classes

- class [Tang::AstNodeAssign](#)  
*An [AstNode](#) that represents a binary expression.*


### 6.4.1 Detailed Description

Declare the [Tang::AstNodeAssign](#) class.


## 6.5 include/astNodeBinary.hpp File Reference

Declare the [Tang::AstNodeBinary](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeBinary.hpp:
```

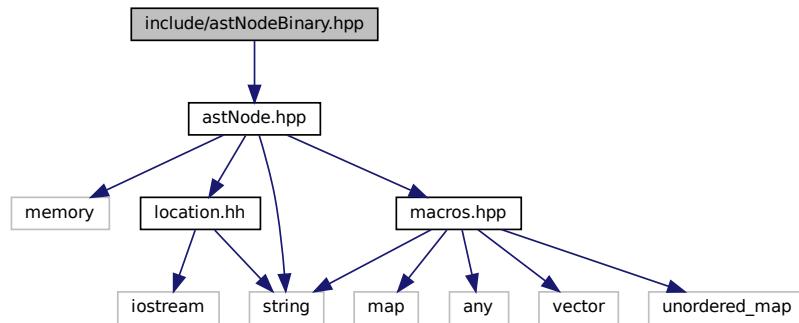

This graph shows which files directly or indirectly include this file:

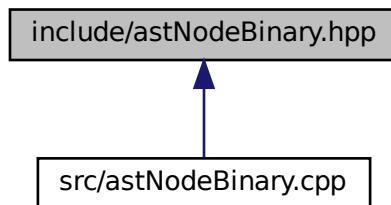

## Classes

- class [Tang::AstNodeBinary](#)  
*An `AstNode` that represents a binary expression.*


### 6.5.1 Detailed Description

Declare the [Tang::AstNodeBinary](#) class.


## 6.6 include/astNodeBlock.hpp File Reference

Declare the [Tang::AstNodeBlock](#) class.

```
#include <vector>
#include <memory>
#include "astNode.hpp"
Include dependency graph for astNodeBlock.hpp:
```

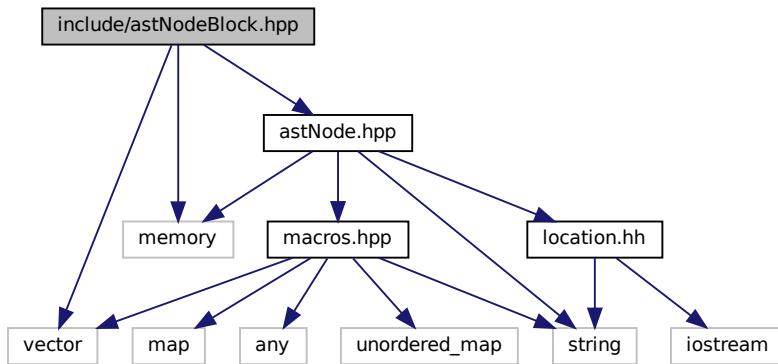

This graph shows which files directly or indirectly include this file:

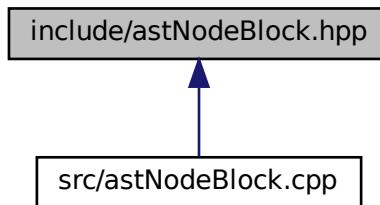

### Classes

- class [Tang::AstNodeBlock](#)  
*An [AstNode](#) that represents a code block.*


#### 6.6.1 Detailed Description

Declare the [Tang::AstNodeBlock](#) class.


## 6.7 include/astNodeBoolean.hpp File Reference

Declare the [Tang::AstNodeBoolean](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeBoolean.hpp:
```

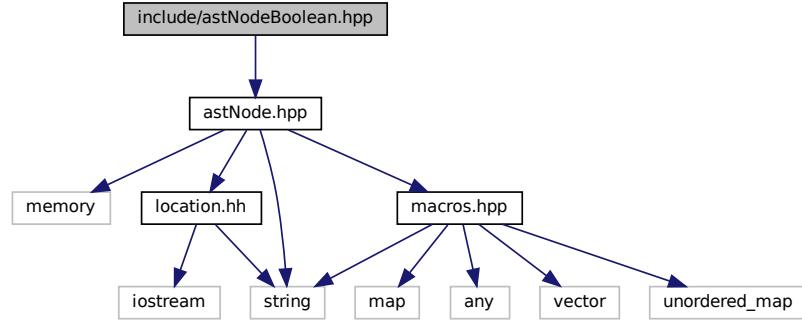

This graph shows which files directly or indirectly include this file:

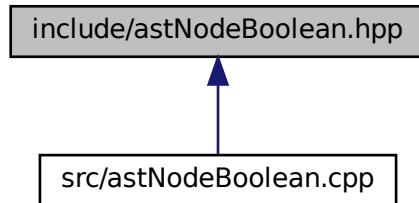

### Classes

- class [Tang::AstNodeBoolean](#)  
*An `AstNode` that represents a boolean literal.*


#### 6.7.1 Detailed Description

Declare the [Tang::AstNodeBoolean](#) class.


## 6.8 include/astNodeBreak.hpp File Reference

Declare the [Tang::AstNodeBreak](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeBreak.hpp:
```

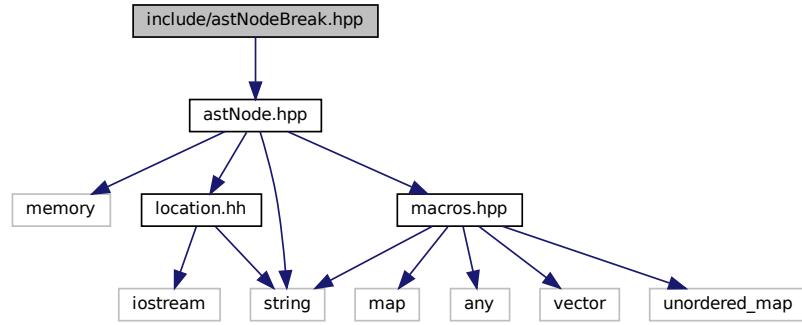

This graph shows which files directly or indirectly include this file:

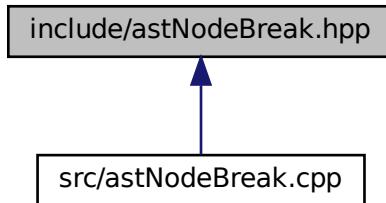

### Classes

- class [Tang::AstNodeBreak](#)  
*An `AstNode` that represents a `break` statement.*


#### 6.8.1 Detailed Description

Declare the [Tang::AstNodeBreak](#) class.


## 6.9 include/astNodeCast.hpp File Reference

Declare the [Tang::AstNodeCast](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeCast.hpp:
```

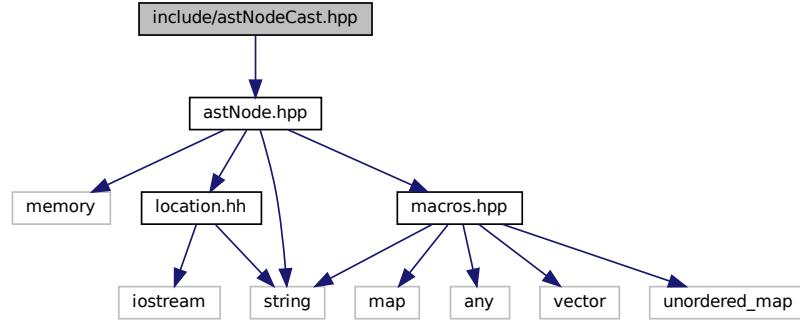

This graph shows which files directly or indirectly include this file:

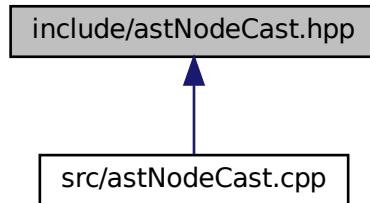

### Classes

- class [Tang::AstNodeCast](#)  
*An `AstNode` that represents a typecast of an expression.*


#### 6.9.1 Detailed Description

Declare the [Tang::AstNodeCast](#) class.


## 6.10 include/astNodeContinue.hpp File Reference

Declare the [Tang::AstNodeContinue](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeContinue.hpp:
```

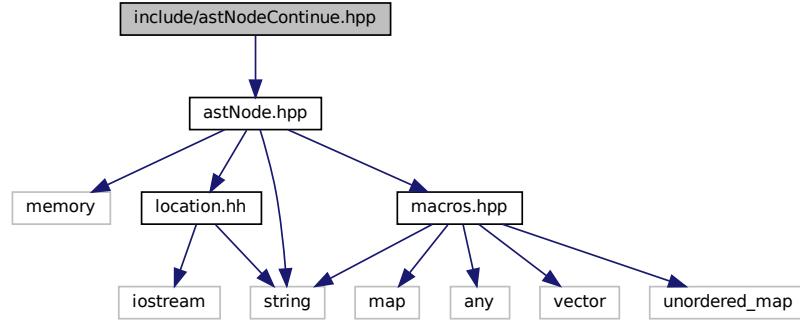

This graph shows which files directly or indirectly include this file:

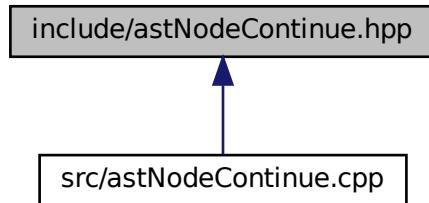

### Classes

- class [Tang::AstNodeContinue](#)  
*An `AstNode` that represents a `continue` statement.*


#### 6.10.1 Detailed Description

Declare the [Tang::AstNodeContinue](#) class.


## 6.11 include/astNodeDoWhile.hpp File Reference

Declare the [Tang::AstNodeDoWhile](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeDoWhile.hpp:
```

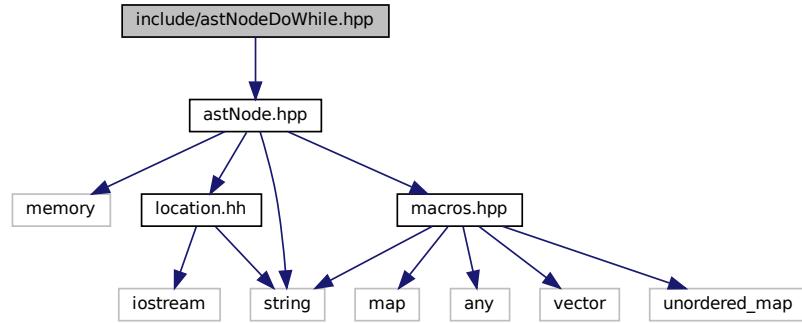

This graph shows which files directly or indirectly include this file:

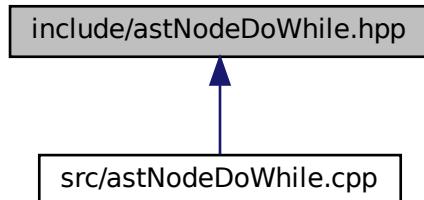

### Classes

- class [Tang::AstNodeDoWhile](#)  
*An `AstNode` that represents a do..while statement.*


#### 6.11.1 Detailed Description

Declare the [Tang::AstNodeDoWhile](#) class.


## 6.12 include/astNodeFloat.hpp File Reference

Declare the [Tang::AstNodeFloat](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeFloat.hpp:
```

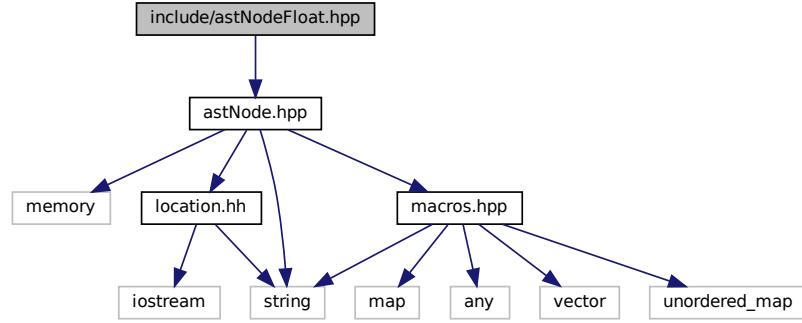

This graph shows which files directly or indirectly include this file:

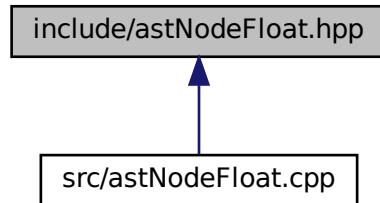

### Classes

- class [Tang::AstNodeFloat](#)  
*An [AstNode](#) that represents an float literal.*


#### 6.12.1 Detailed Description

Declare the [Tang::AstNodeFloat](#) class.


## 6.13 include/astNodeFor.hpp File Reference

Declare the [Tang::AstNodeFor](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeFor.hpp:
```

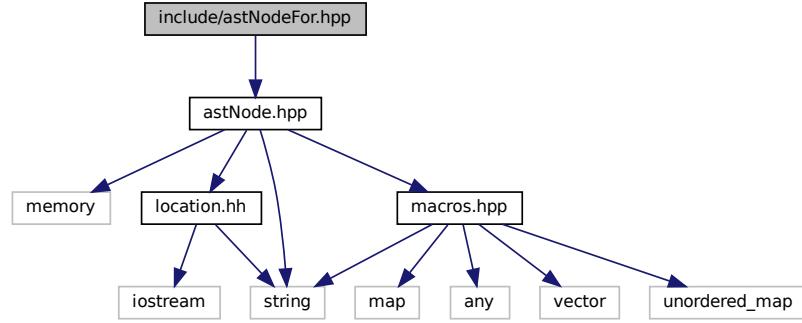

This graph shows which files directly or indirectly include this file:

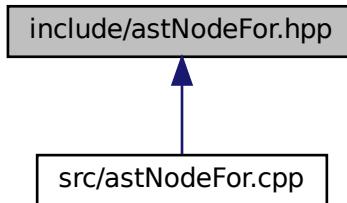

### Classes

- class [Tang::AstNodeFor](#)  
*An `AstNode` that represents an `if()` statement.*


#### 6.13.1 Detailed Description

Declare the [Tang::AstNodeFor](#) class.


## 6.14 include/astNodeFunctionCall.hpp File Reference

Declare the [Tang::AstNodeFunctionCall](#) class.

```
#include <vector>
#include "astNode.hpp"
Include dependency graph for astNodeFunctionCall.hpp:
```

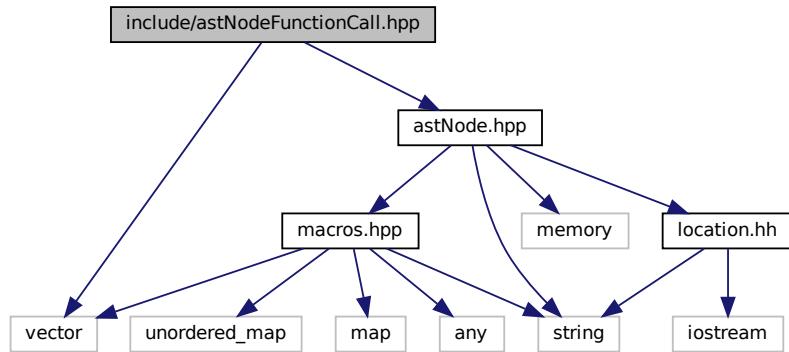

This graph shows which files directly or indirectly include this file:

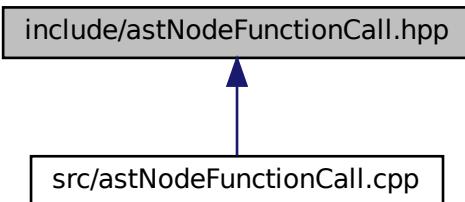

### Classes

- class [Tang::AstNodeFunctionCall](#)  
*An [AstNode](#) that represents a function call.*


#### 6.14.1 Detailed Description

Declare the [Tang::AstNodeFunctionCall](#) class.


## 6.15 include/astNodeFunctionDeclaration.hpp File Reference

Declare the [Tang::AstNodeFunctionDeclaration](#) class.

```
#include <string>
#include <vector>
#include "astNode.hpp"
Include dependency graph for astNodeFunctionDeclaration.hpp:
```

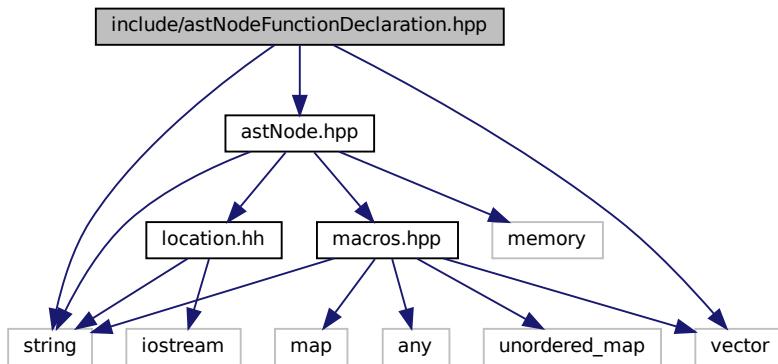

This graph shows which files directly or indirectly include this file:

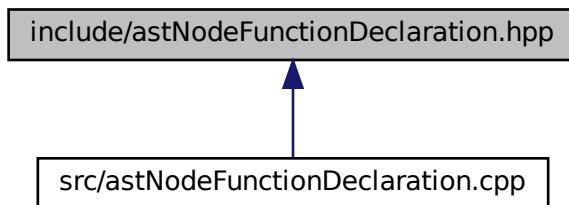

### Classes

- class [Tang::AstNodeFunctionDeclaration](#)  
*An [AstNode](#) that represents a function declaration.*


#### 6.15.1 Detailed Description

Declare the [Tang::AstNodeFunctionDeclaration](#) class.


## 6.16 include/astNodentifier.hpp File Reference

Declare the [Tang::AstNodentifier](#) class.

```
#include <string>
#include "astNode.hpp"
Include dependency graph for astNodentifier.hpp:
```

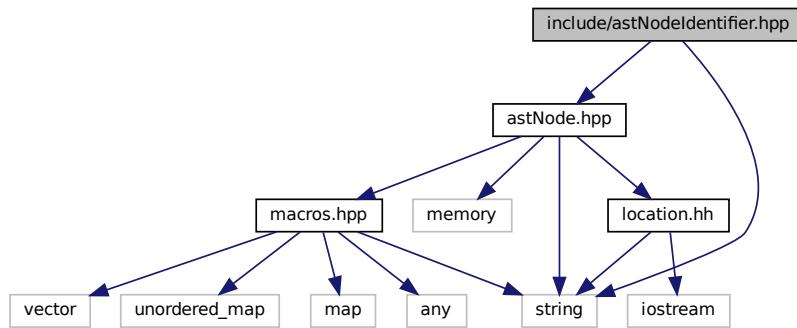

This graph shows which files directly or indirectly include this file:



### Classes

- class [Tang::AstNodentifier](#)  
*An `AstNode` that represents an identifier.*


#### 6.16.1 Detailed Description

Declare the [Tang::AstNodentifier](#) class.


## 6.17 include/astNodelfElse.hpp File Reference

Declare the [Tang::AstNodelfElse](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeIfElse.hpp:
```

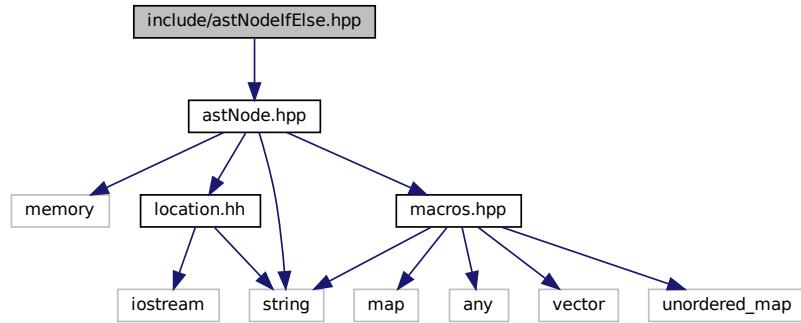

This graph shows which files directly or indirectly include this file:

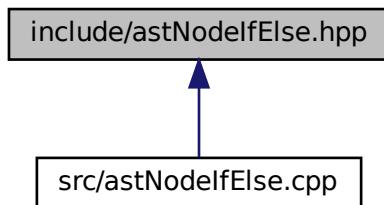

## Classes

- class [Tang::AstNodeIfElse](#)  
*An `AstNode` that represents an `if..else` statement.*


### 6.17.1 Detailed Description

Declare the [Tang::AstNodeIfElse](#) class.


## 6.18 include/astNodeIndex.hpp File Reference

Declare the [Tang::AstNodeIndex](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeIndex.hpp:
```

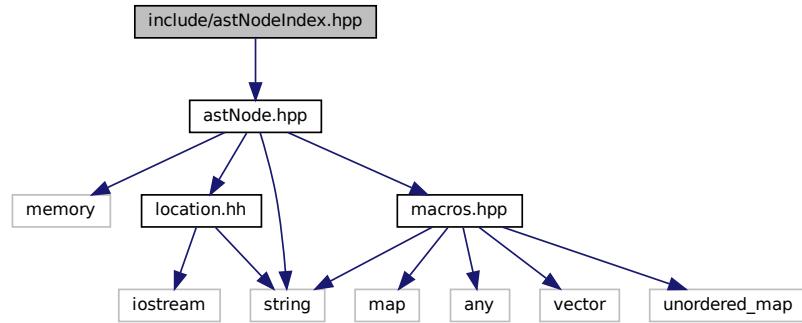

This graph shows which files directly or indirectly include this file:

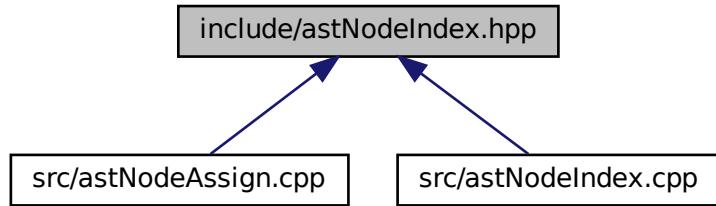

## Classes

- class [Tang::AstNodeIndex](#)  
*An `AstNode` that represents an index into a collection.*


### 6.18.1 Detailed Description

Declare the [Tang::AstNodeIndex](#) class.


## 6.19 include/astNodeInteger.hpp File Reference

Declare the [Tang::AstNodeInteger](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeInteger.hpp:
```

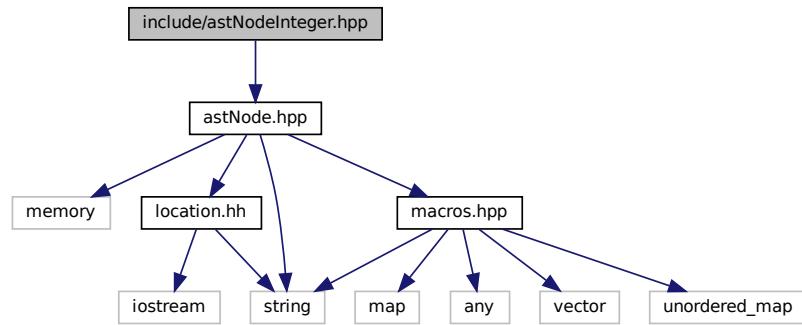

This graph shows which files directly or indirectly include this file:

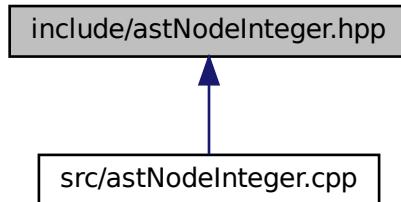

## Classes

- class [Tang::AstNodeInteger](#)  
*An `AstNode` that represents an integer literal.*


### 6.19.1 Detailed Description

Declare the `Tang::AstNodeInteger` class.


## 6.20 include/astNodeLibrary.hpp File Reference

Declare the `Tang::AstNodeLibrary` class.

```
#include <string>
#include "astNode.hpp"
Include dependency graph for astNodeLibrary.hpp:
```

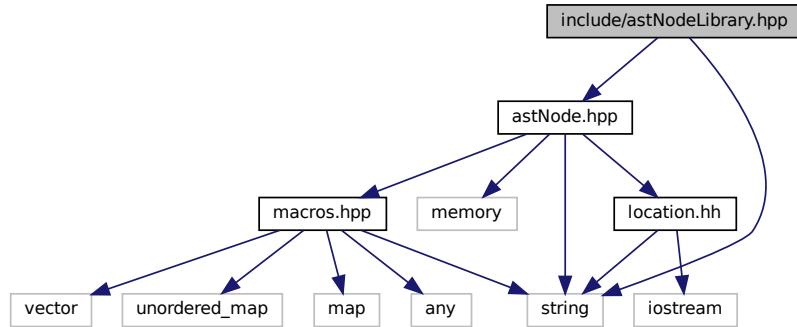

This graph shows which files directly or indirectly include this file:

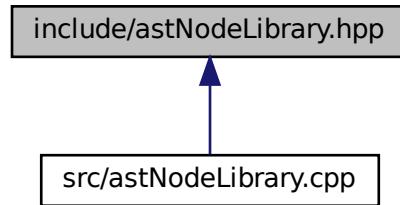

## Classes

- class [Tang::AstNodeLibrary](#)  
*An `AstNode` that represents an identifier.*


### 6.20.1 Detailed Description

Declare the [Tang::AstNodeLibrary](#) class.


## 6.21 include/astNodeMap.hpp File Reference

Declare the [Tang::AstNodeMap](#) class.

```
#include <vector>
#include <map>
#include <string>
#include "astNode.hpp"
Include dependency graph for astNodeMap.hpp:
```

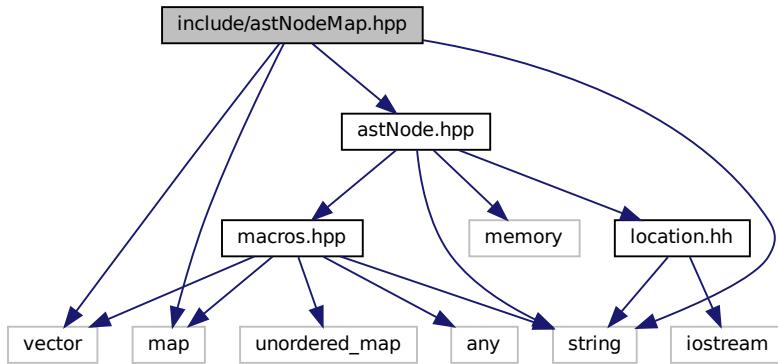

This graph shows which files directly or indirectly include this file:

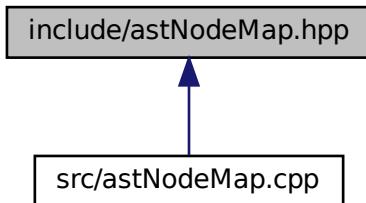

## Classes

- class [Tang::AstNodeMap](#)  
*An [AstNode](#) that represents a map literal.*


### 6.21.1 Detailed Description

Declare the [Tang::AstNodeMap](#) class.


## 6.22 include/astNodePeriod.hpp File Reference

Declare the [Tang::AstNodePeriod](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodePeriod.hpp:
```

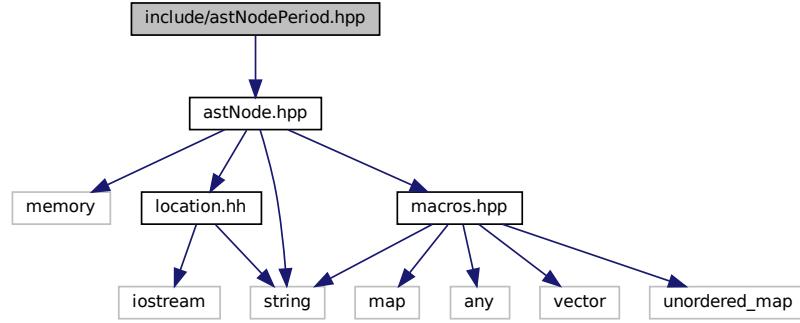

This graph shows which files directly or indirectly include this file:

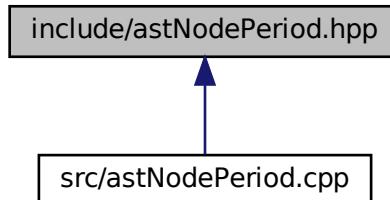

### Classes

- class [Tang::AstNodePeriod](#)

*An `AstNode` that represents a member access (period) into an object.*


#### 6.22.1 Detailed Description

Declare the [Tang::AstNodePeriod](#) class.


## 6.23 include/astNodePrint.hpp File Reference

Declare the [Tang::AstNodePrint](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodePrint.hpp:
```

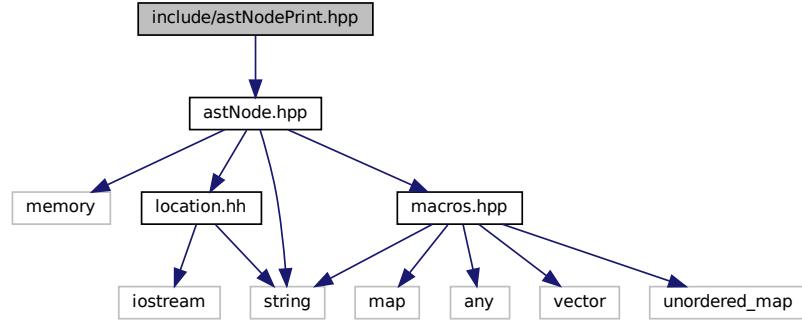

This graph shows which files directly or indirectly include this file:

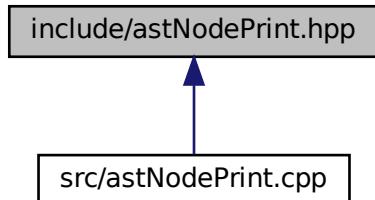

### Classes

- class [Tang::AstNodePrint](#)  
*An `AstNode` that represents a print typeeration.*


#### 6.23.1 Detailed Description

Declare the [Tang::AstNodePrint](#) class.


## 6.24 include/astNodeRangedFor.hpp File Reference

Declare the [Tang::AstNodeRangedFor](#) class.

```
#include "astNode.hpp"
#include "astNodeIdentifier.hpp"
Include dependency graph for astNodeRangedFor.hpp:
```

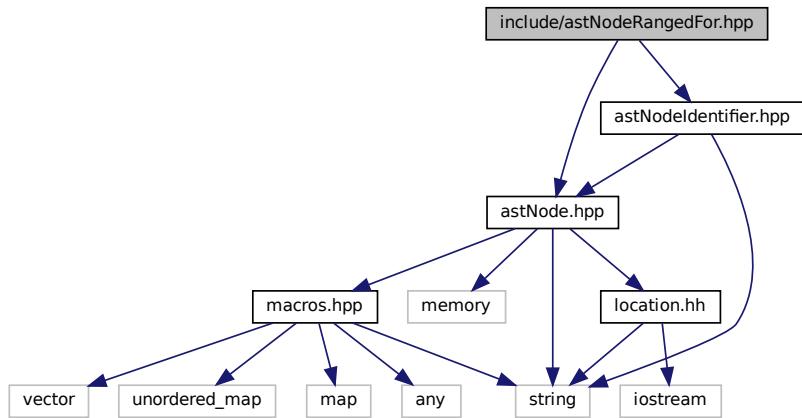

This graph shows which files directly or indirectly include this file:

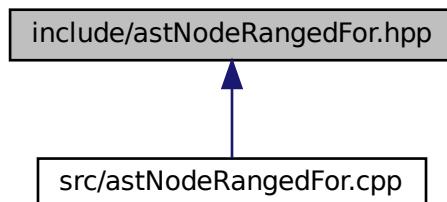

### Classes

- class [Tang::AstNodeRangedFor](#)  
*An `AstNode` that represents a ranged for() statement.*


#### 6.24.1 Detailed Description

Declare the [Tang::AstNodeRangedFor](#) class.


## 6.25 include/astNodeReturn.hpp File Reference

Declare the [Tang::AstNodeReturn](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeReturn.hpp:
```

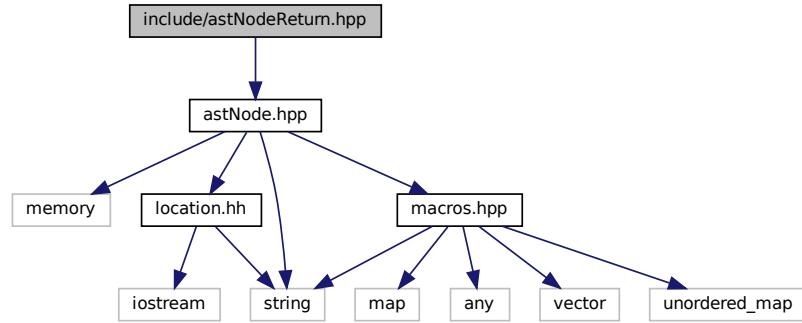

This graph shows which files directly or indirectly include this file:

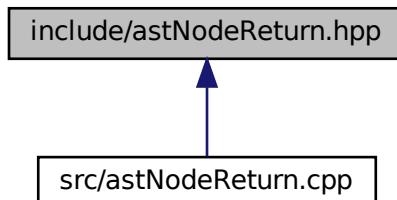

### Classes

- class [Tang::AstNodeReturn](#)  
*An `AstNode` that represents a return statement.*


#### 6.25.1 Detailed Description

Declare the [Tang::AstNodeReturn](#) class.


## 6.26 include/astNodeSlice.hpp File Reference

Declare the [Tang::AstNodeSlice](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeSlice.hpp:
```

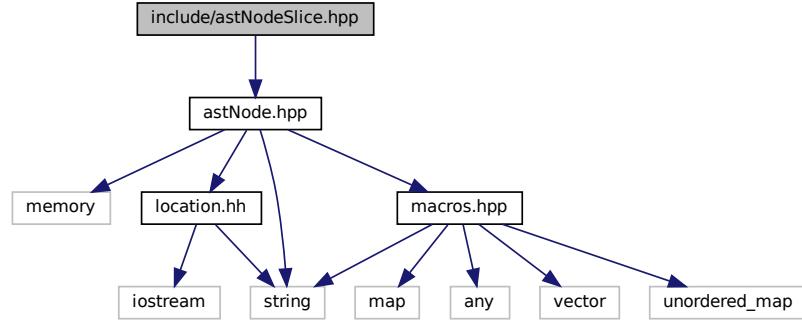

This graph shows which files directly or indirectly include this file:

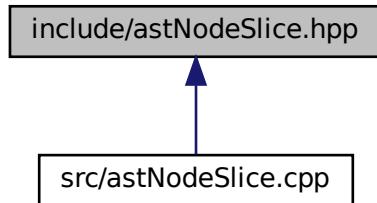

### Classes

- class [Tang::AstNodeSlice](#)  
*An `AstNode` that represents a ternary expression.*


#### 6.26.1 Detailed Description

Declare the [Tang::AstNodeSlice](#) class.


## 6.27 include/astNodeString.hpp File Reference

Declare the [Tang::AstNodeString](#) class.

```
#include "astNode.hpp"
#include "unicodeString.hpp"
Include dependency graph for astNodeString.hpp:
```

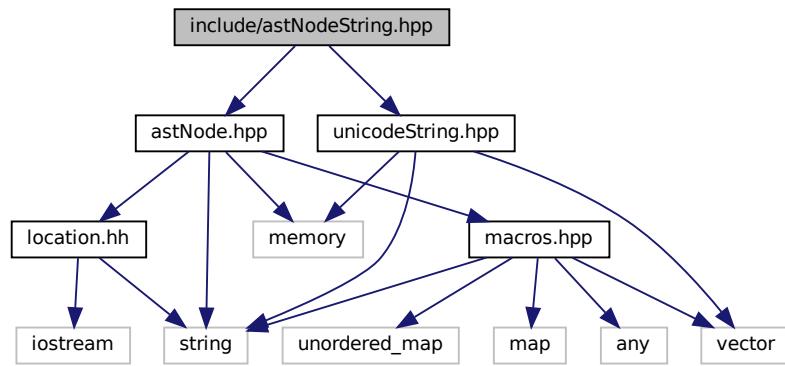

This graph shows which files directly or indirectly include this file:



### Classes

- class [Tang::AstNodeString](#)  
*An [AstNode](#) that represents a string literal.*


#### 6.27.1 Detailed Description

Declare the [Tang::AstNodeString](#) class.


## 6.28 include/astNodeTernary.hpp File Reference

Declare the [Tang::AstNodeTernary](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeTernary.hpp:
```

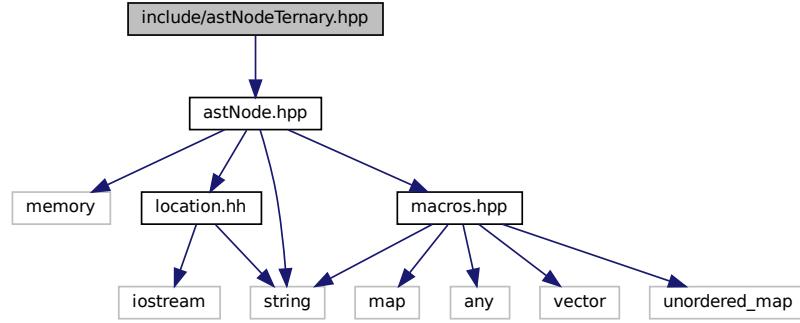

This graph shows which files directly or indirectly include this file:

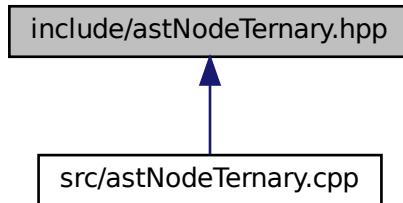

### Classes

- class [Tang::AstNodeTernary](#)  
*An `AstNode` that represents a ternary expression.*


#### 6.28.1 Detailed Description

Declare the [Tang::AstNodeTernary](#) class.


## 6.29 include/astNodeUnary.hpp File Reference

Declare the [Tang::AstNodeUnary](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeUnary.hpp:
```

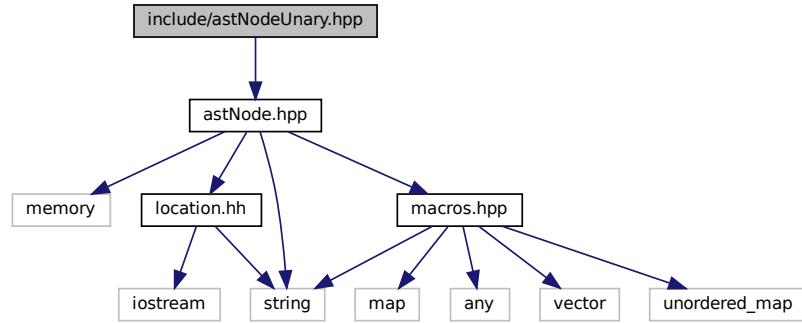

This graph shows which files directly or indirectly include this file:

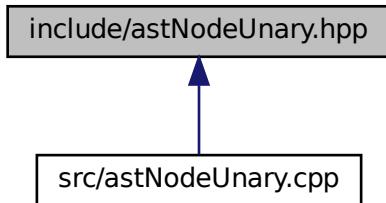

### Classes

- class [Tang::AstNodeUnary](#)  
*An `AstNode` that represents a unary negation.*


#### 6.29.1 Detailed Description

Declare the [Tang::AstNodeUnary](#) class.


## 6.30 include/astNodeUse.hpp File Reference

Declare the [Tang::AstNodeUse](#) class.

```
#include <string>
#include "astNode.hpp"
Include dependency graph for astNodeUse.hpp:
```

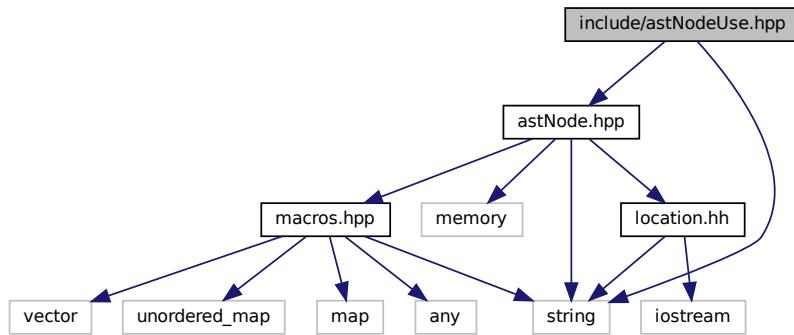

This graph shows which files directly or indirectly include this file:

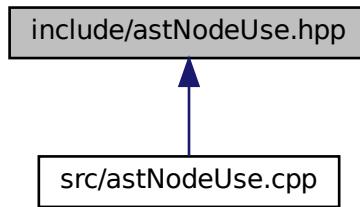

### Classes

- class [Tang::AstNodeUse](#)  
*An `AstNode` that represents the inclusion of a library into the script.*


#### 6.30.1 Detailed Description

Declare the [Tang::AstNodeUse](#) class.


## 6.31 include/astNodeWhile.hpp File Reference

Declare the [Tang::AstNodeWhile](#) class.

```
#include "astNode.hpp"
Include dependency graph for astNodeWhile.hpp:
```

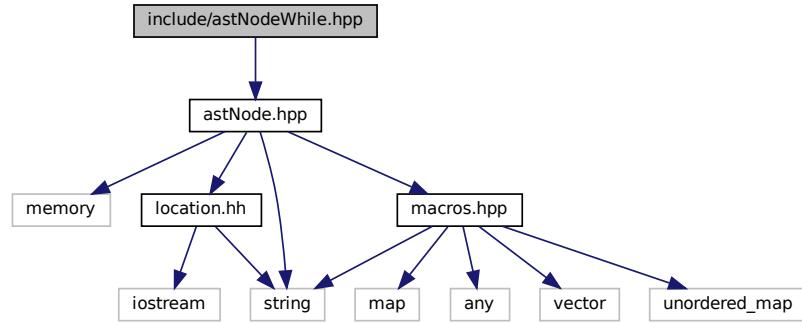

This graph shows which files directly or indirectly include this file:

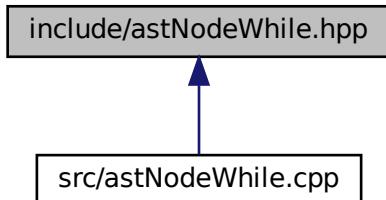

### Classes

- class [Tang::AstNodeWhile](#)  
*An [AstNode](#) that represents a while statement.*


#### 6.31.1 Detailed Description

Declare the [Tang::AstNodeWhile](#) class.

## 6.32 include/computedExpression.hpp File Reference

Declare the [Tang::ComputedExpression](#) base class.

```
#include <cstdint>
#include <string>
#include <vector>
#include <memory>
#include "macros.hpp"
#include "garbageCollected.hpp"
#include "error.hpp"
Include dependency graph for computedExpression.hpp:
```

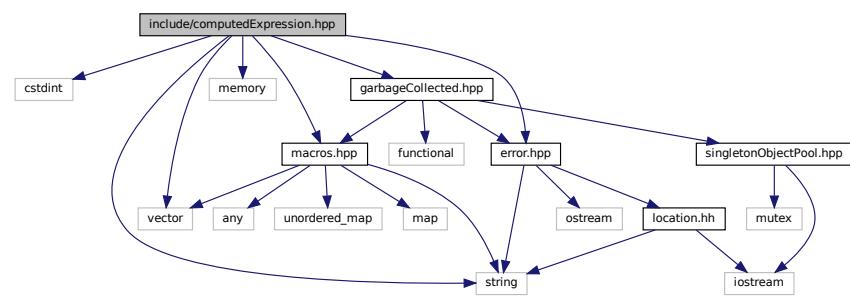

This graph shows which files directly or indirectly include this file:



### Classes

- class [Tang::ComputedExpression](#)  
*Represents the result of a computation that has been executed.*


#### 6.32.1 Detailed Description

Declare the [Tang::ComputedExpression](#) base class.


## 6.33 include/computedExpressionArray.hpp File Reference

Declare the [Tang::ComputedExpressionArray](#) class.

```
#include <vector>
#include "computedExpression.hpp"
Include dependency graph for computedExpressionArray.hpp:
```

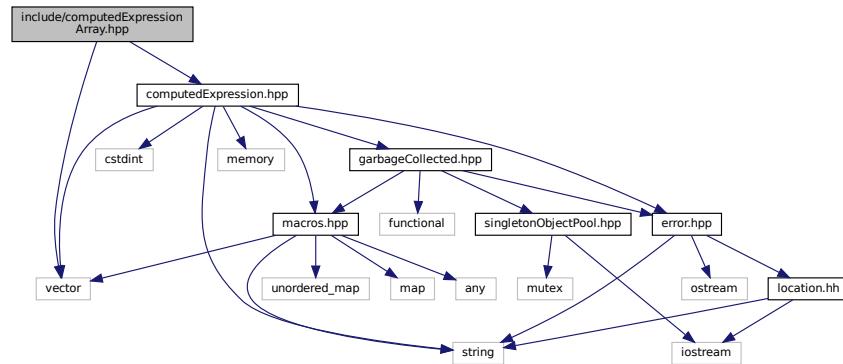

This graph shows which files directly or indirectly include this file:

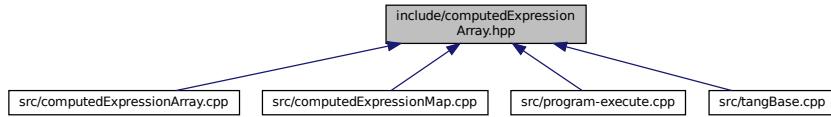

## Classes

- class [Tang::ComputedExpressionArray](#)  
*Represents an Array that is the result of a computation.*


### 6.33.1 Detailed Description

Declare the [Tang::ComputedExpressionArray](#) class.

## 6.34 include/computedExpressionBoolean.hpp File Reference

Declare the [Tang::ComputedExpressionBoolean](#) class.

```
#include "computedExpression.hpp"
Include dependency graph for computedExpressionBoolean.hpp:
```

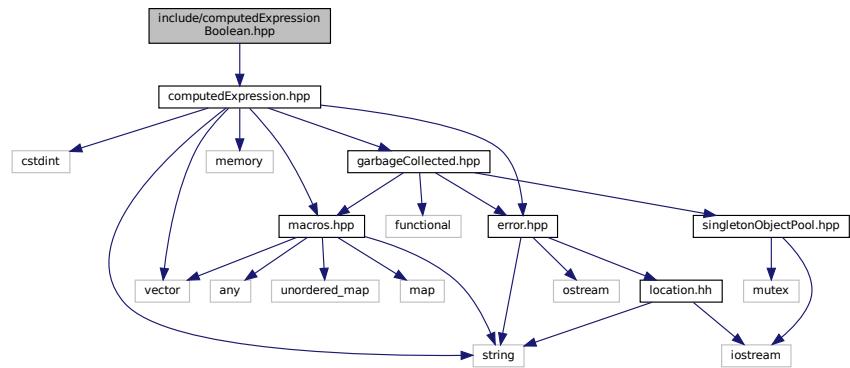

This graph shows which files directly or indirectly include this file:



## Classes

- class [Tang::ComputedExpressionBoolean](#)  
*Represents an Boolean that is the result of a computation.*


### 6.34.1 Detailed Description

Declare the [Tang::ComputedExpressionBoolean](#) class.


## 6.35 include/computedExpressionCompiledFunction.hpp File Reference

Declare the [Tang::ComputedExpressionCompiledFunction](#) class.

```
#include "computedExpression.hpp"
Include dependency graph for computedExpressionCompiledFunction.hpp:
```

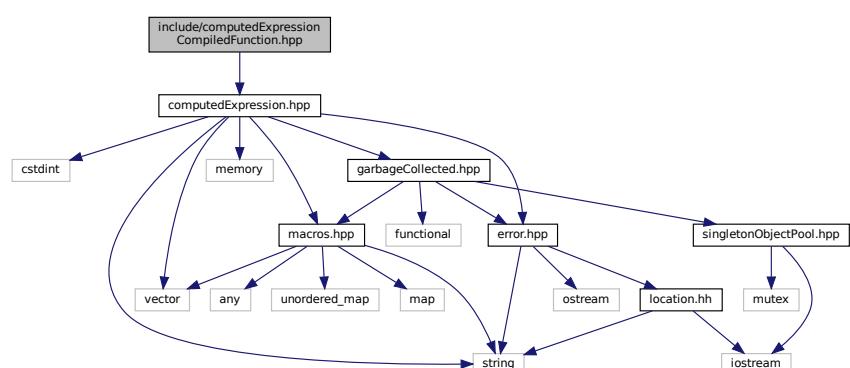

This graph shows which files directly or indirectly include this file:

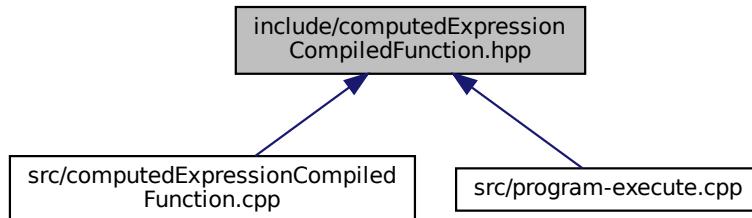

## Classes

- class [Tang::ComputedExpressionCompiledFunction](#)  
*Represents a Compiled Function declared in the script.*

### 6.35.1 Detailed Description


Declare the [Tang::ComputedExpressionCompiledFunction](#) class.

## 6.36 include/computedExpressionError.hpp File Reference

Declare the [Tang::ComputedExpressionError](#) class.

```
#include "computedExpression.hpp"
#include "error.hpp"
```

Include dependency graph for computedExpressionError.hpp:

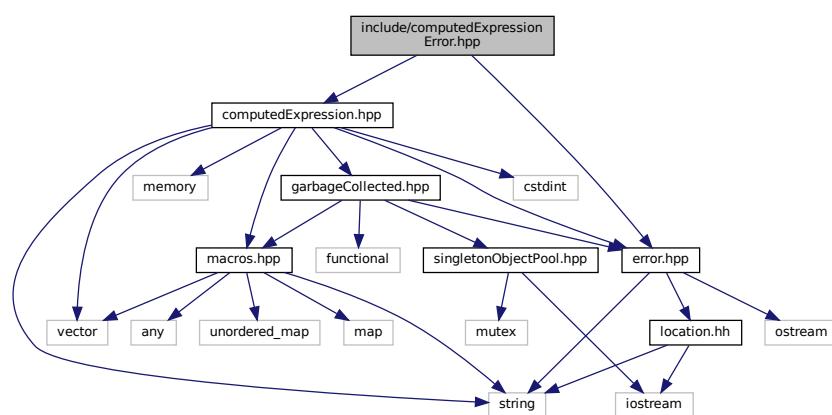

This graph shows which files directly or indirectly include this file:



## Classes

- class [Tang::ComputedExpressionError](#)

*Represents a Runtime Error.*


### 6.36.1 Detailed Description

Declare the [Tang::ComputedExpressionError](#) class.


## 6.37 include/computedExpressionFloat.hpp File Reference

Declare the [Tang::ComputedExpressionFloat](#) class.

```
#include "computedExpression.hpp"
Include dependency graph for computedExpressionFloat.hpp:
```

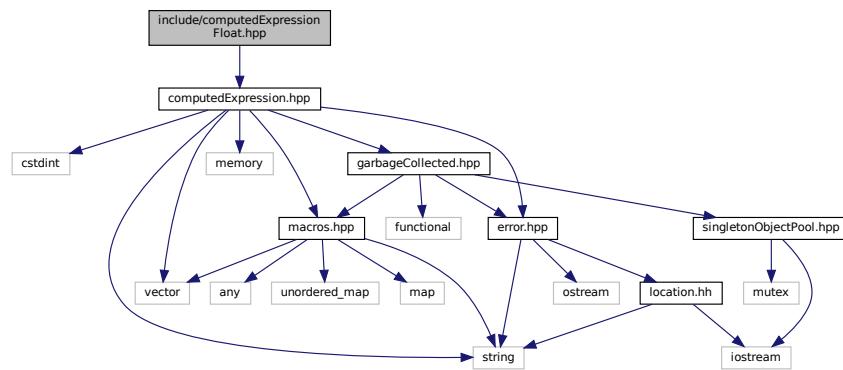

This graph shows which files directly or indirectly include this file:



## Classes

- class [Tang::ComputedExpressionFloat](#)

*Represents a Float that is the result of a computation.*


### 6.37.1 Detailed Description

Declare the [Tang::ComputedExpressionFloat](#) class.


## 6.38 include/computedExpressionInteger.hpp File Reference

Declare the [Tang::ComputedExpressionInteger](#) class.

```
#include "computedExpression.hpp"
Include dependency graph for computedExpressionInteger.hpp:
```

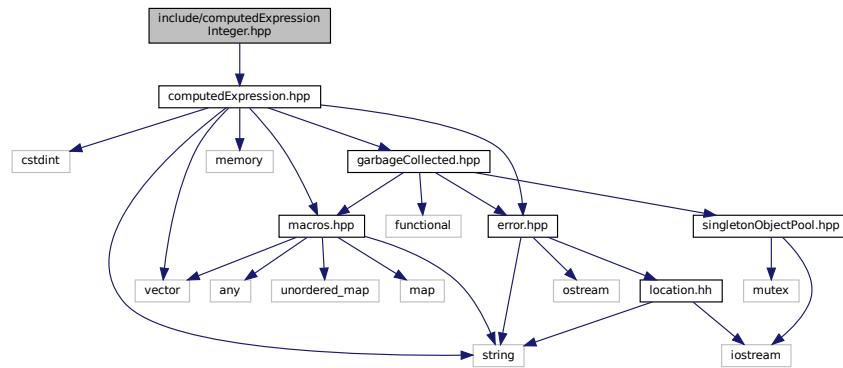

This graph shows which files directly or indirectly include this file:



## Classes

- class [Tang::ComputedExpressionInteger](#)  
*Represents an Integer that is the result of a computation.*


### 6.38.1 Detailed Description

Declare the [Tang::ComputedExpressionInteger](#) class.


## 6.39 include/computedExpressionIterator.hpp File Reference

Declare the [Tang::ComputedExpressionIterator](#) class.

```
#include <vector>
#include "computedExpression.hpp"
Include dependency graph for computedExpressionIterator.hpp:
```

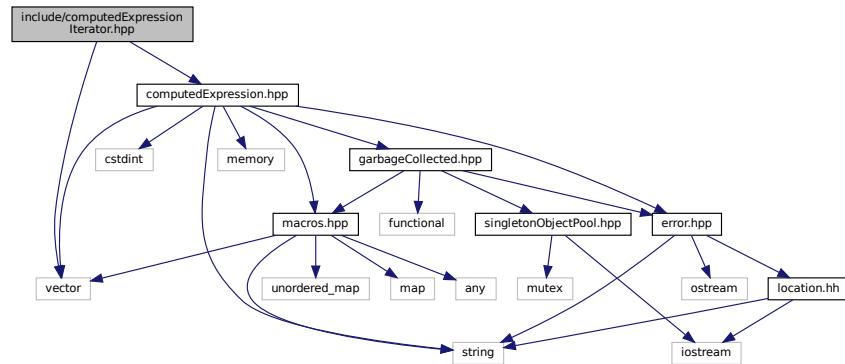

This graph shows which files directly or indirectly include this file:

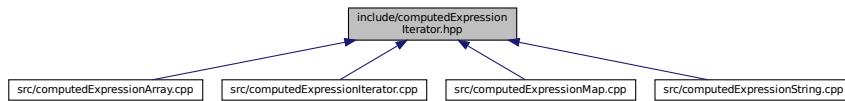

## Classes

- class [Tang::ComputedExpressionIterator](#)  
*Represents an Iterator that is the result of a computation.*

### 6.39.1 Detailed Description


Declare the [Tang::ComputedExpressionIterator](#) class.

## 6.40 include/computedExpressionIteratorEnd.hpp File Reference


Declare the [Tang::ComputedExpressionIteratorEnd](#) class.

```
#include <vector>
#include "computedExpression.hpp"
```

Include dependency graph for computedExpressionIteratorEnd.hpp:

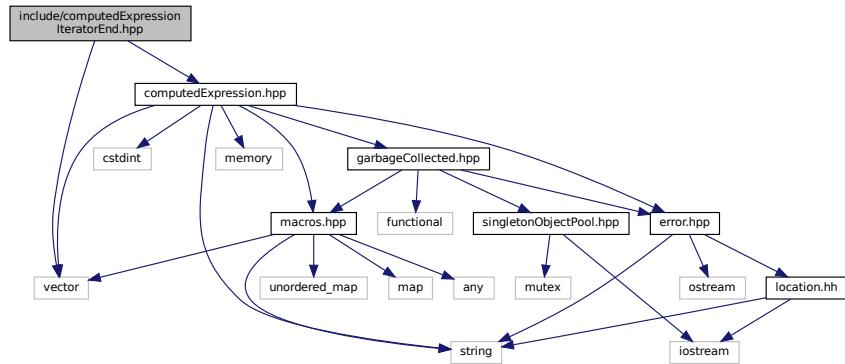

This graph shows which files directly or indirectly include this file:



## Classes

- class [Tang::ComputedExpressionIteratorEnd](#)  
*Represents that a collection has no more values through which to iterate.*

### 6.40.1 Detailed Description



Declare the `Tang::ComputedExpressionIteratorEnd` class.

## 6.41 include/computedExpressionLibrary.hpp File Reference

Declare the `Tang::ComputedExpressionLibrary` class.

```
#include "macros.hpp"
#include "computedExpression.hpp"
```

Include dependency graph for computedExpressionLibrary.hpp:

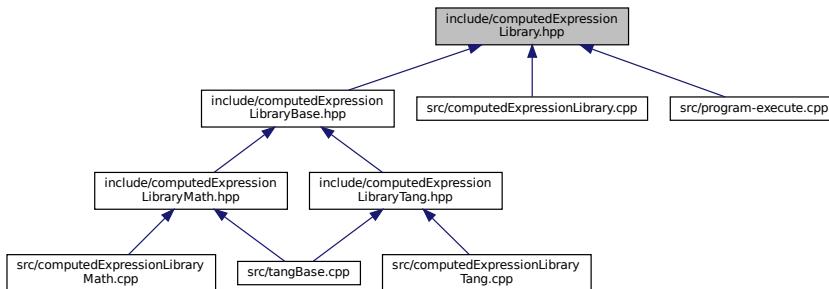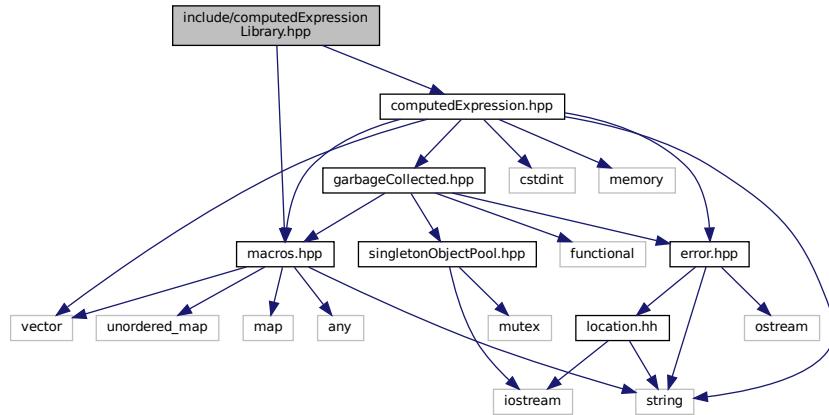

## Classes

- class [Tang::ComputedExpressionLibrary](#)

*Represents a Runtime Library.*


### 6.41.1 Detailed Description

Declare the [Tang::ComputedExpressionLibrary](#) class.


## 6.42 include/computedExpressionLibraryMath.hpp File Reference

Declare the [Tang::ComputedExpressionLibraryMath](#) class.

```
#include "macros.hpp"
#include "computedExpressionLibraryBase.hpp"
Include dependency graph for computedExpressionLibraryMath.hpp:
```

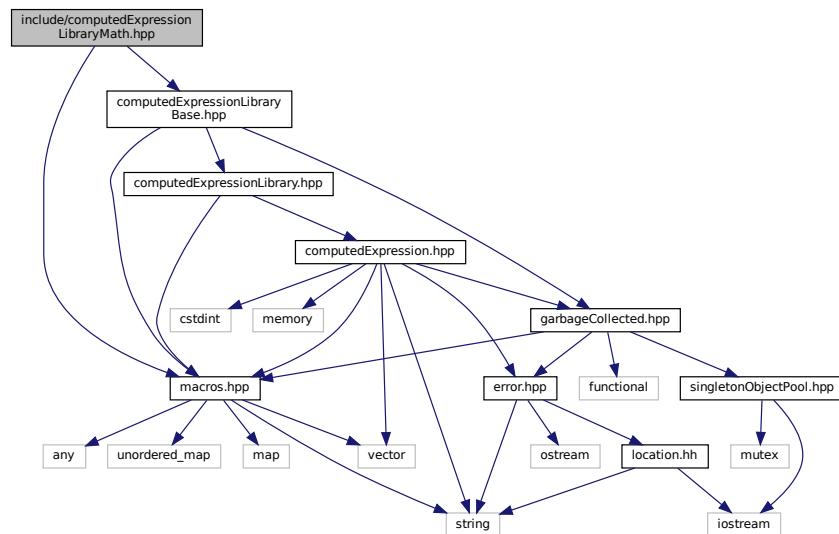

This graph shows which files directly or indirectly include this file:

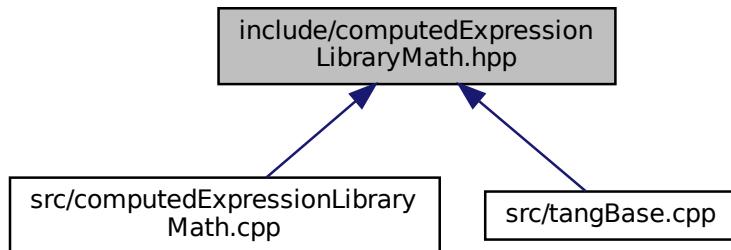

## Macros

- `#define ComputedExpressionLibraryBase ComputedExpressionLibraryMath`


### 6.42.1 Detailed Description

Declare the `Tang::ComputedExpressionLibraryMath` class.


## 6.43 include/computedExpressionLibraryTang.hpp File Reference

Declare the Tang::ComputedExpressionLibraryTang class.

```
#include "macros.hpp"
#include "computedExpressionLibraryBase.hpp"
Include dependency graph for computedExpressionLibraryTang.hpp:
```

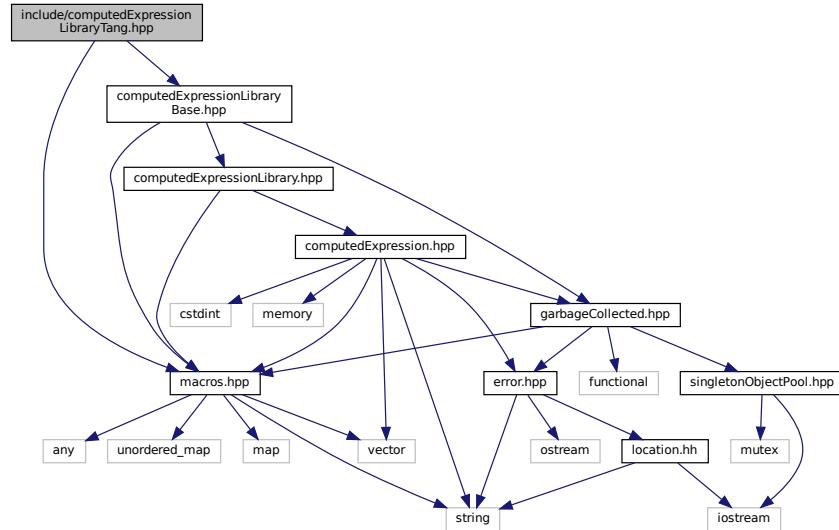

This graph shows which files directly or indirectly include this file:

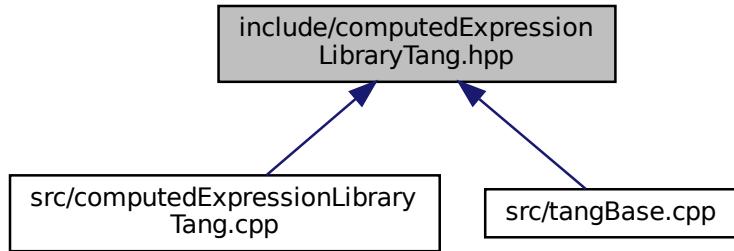

### Macros

- `#define ComputedExpressionLibraryBase ComputedExpressionLibraryTang`


#### 6.43.1 Detailed Description

Declare the Tang::ComputedExpressionLibraryTang class.


## 6.44 include/computedExpressionMap.hpp File Reference

Declare the [Tang::ComputedExpressionMap](#) class.

```
#include <map>
#include <string>
#include "computedExpression.hpp"
Include dependency graph for computedExpressionMap.hpp:
```

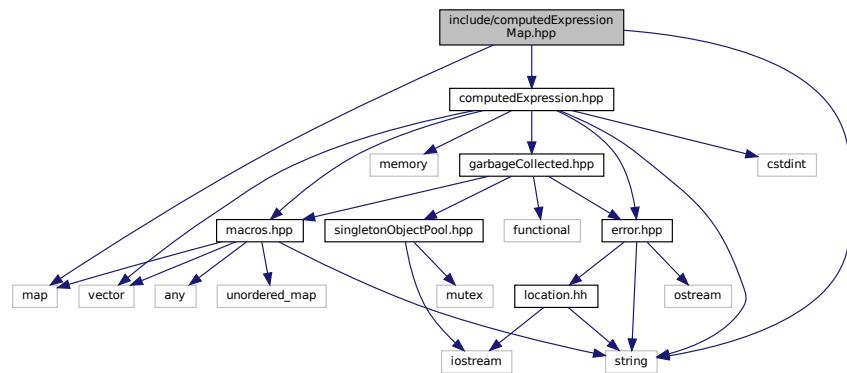

This graph shows which files directly or indirectly include this file:

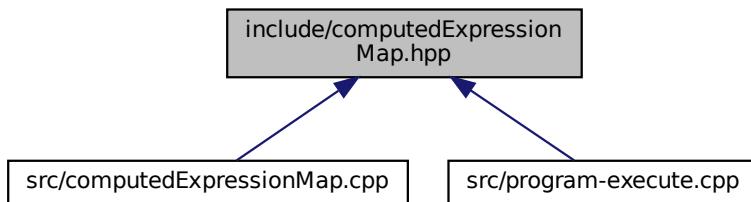

### Classes

- class [Tang::ComputedExpressionMap](#)  
*Represents an Map that is the result of a computation.*


#### 6.44.1 Detailed Description

Declare the [Tang::ComputedExpressionMap](#) class.


## 6.45 include/computedExpressionNativeBoundFunction.hpp File Reference

Declare the [Tang::ComputedExpressionNativeBoundFunction](#) class.

```
#include <optional>
#include <typeindex>
#include "computedExpression.hpp"
Include dependency graph for computedExpressionNativeBoundFunction.hpp:
```

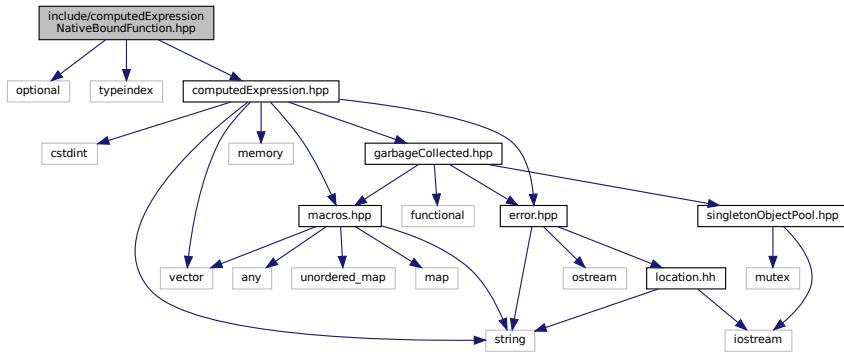

This graph shows which files directly or indirectly include this file:

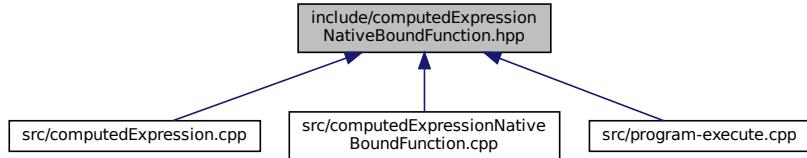

## Classes

- class [Tang::ComputedExpressionNativeBoundFunction](#)  
*Represents a NativeBound Function declared in the script.*


### 6.45.1 Detailed Description

Declare the [Tang::ComputedExpressionNativeBoundFunction](#) class.


## 6.46 include/computedExpressionNativeFunction.hpp File Reference

Declare the [Tang::ComputedExpressionNativeFunction](#) class.

```
#include <optional>
#include <typeindex>
#include "computedExpression.hpp"
Include dependency graph for computedExpressionNativeFunction.hpp:
```

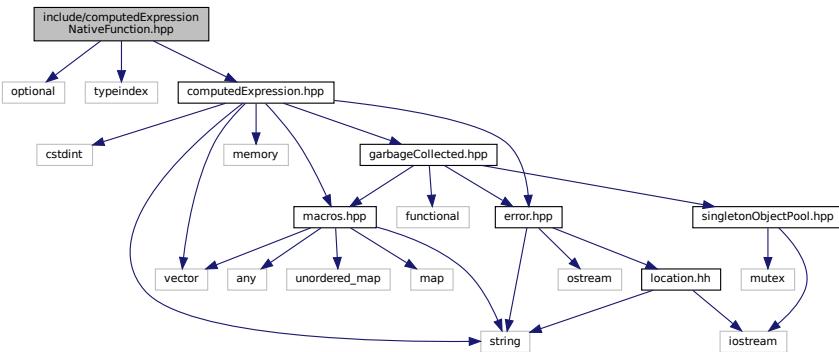

This graph shows which files directly or indirectly include this file:

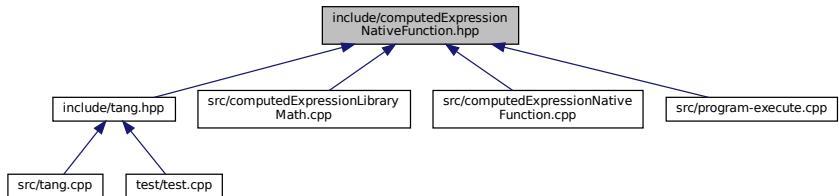

## Classes

- class [Tang::ComputedExpressionNativeFunction](#)  
*Represents a Native Function provided by compiled C++ code.*


### 6.46.1 Detailed Description

Declare the [Tang::ComputedExpressionNativeFunction](#) class.


## 6.47 include/computedExpressionNativeLibraryFunction.hpp File Reference

Declare the [Tang::ComputedExpressionNativeLibraryFunction](#) class.

```
#include <optional>
#include <typeindex>
#include "computedExpression.hpp"
Include dependency graph for computedExpressionNativeLibraryFunction.hpp:
```

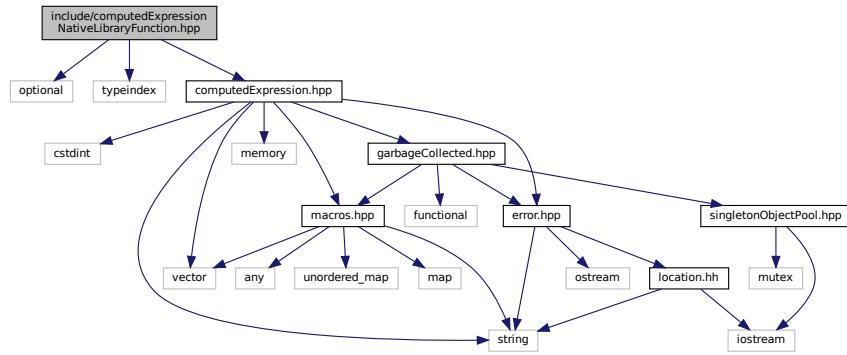

This graph shows which files directly or indirectly include this file:

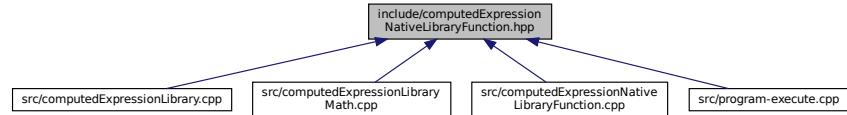

## Classes

- class [Tang::ComputedExpressionNativeLibraryFunction](#)

*Represents a Native Function provided by compiled C++ code that is executed to create a library or one of its attributes.*


### 6.47.1 Detailed Description

Declare the [Tang::ComputedExpressionNativeLibraryFunction](#) class.

## 6.48 include/computedExpressionString.hpp File Reference

Declare the [Tang::ComputedExpressionString](#) class.

```
#include <optional>
#include "macros.hpp"
#include "computedExpression.hpp"
#include "unicodeString.hpp"
Include dependency graph for computedExpressionString.hpp:
```

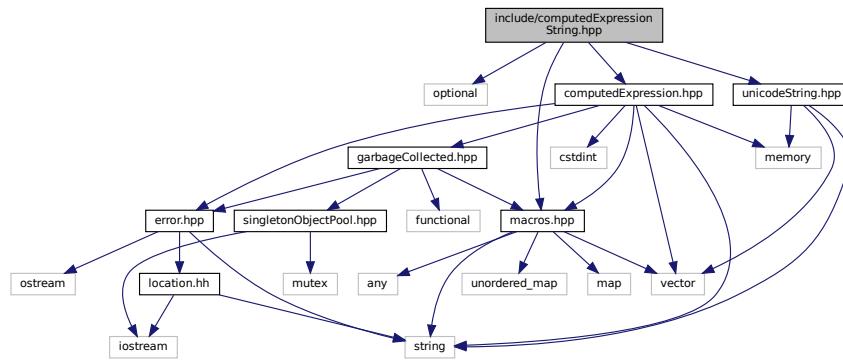

This graph shows which files directly or indirectly include this file:



### Classes

- class [Tang::ComputedExpressionString](#)  
*Represents a String that is the result of a computation.*

#### 6.48.1 Detailed Description


Declare the [Tang::ComputedExpressionString](#) class.

## 6.49 include/context.hpp File Reference

Declare the [Tang::Context](#) class.

```
#include <any>
#include <map>
#include <optional>
#include <string>
#include <vector>
```

```
#include "macros.hpp"
#include "computedExpression.hpp"
Include dependency graph for context.hpp:
```

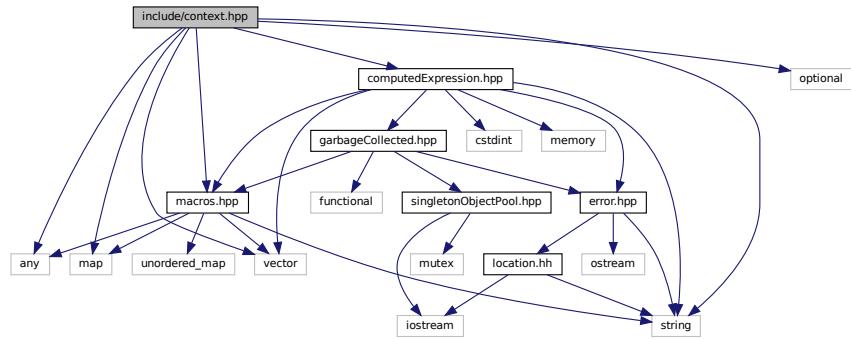

This graph shows which files directly or indirectly include this file:



## Classes

- class [Tang::Context](#)  
*Holds all environment variables specific to the execution of a program.*

### 6.49.1 Detailed Description


Declare the [Tang::Context](#) class.

## 6.50 include/error.hpp File Reference

Declare the [Tang::Error](#) class used to describe syntax and runtime errors.

```
#include <string>
#include <ostream>
```

```
#include "location.hh"
Include dependency graph for error.hpp:
```

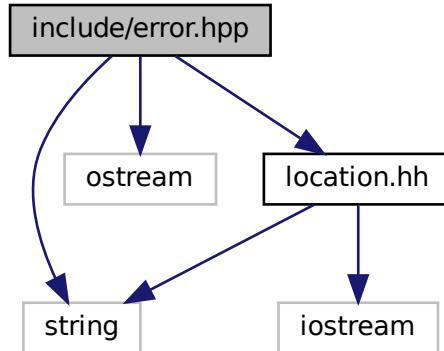

This graph shows which files directly or indirectly include this file:



## Classes

- class [Tang::Error](#)

*The [Error](#) class is used to report any error of the system, whether a syntax (parsing) error or a runtime (execution) error.*

### 6.50.1 Detailed Description


Declare the [Tang::Error](#) class used to describe syntax and runtime errors.

## 6.51 include/garbageCollected.hpp File Reference

Declare the [Tang::GarbageCollected](#) class.

```
#include <functional>
#include "macros.hpp"
#include "singletonObjectPool.hpp"
```

```
#include "error.hpp"
Include dependency graph for garbageCollected.hpp:
```

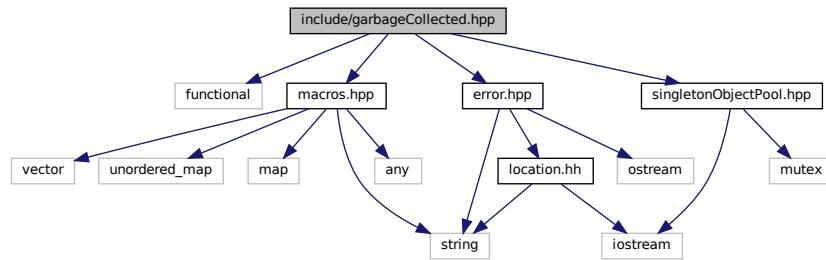

This graph shows which files directly or indirectly include this file:

## Classes

- class [Tang::GarbageCollected](#)

*A container that acts as a resource-counting garbage collector for the specified type.*


### 6.51.1 Detailed Description

Declare the [Tang::GarbageCollected](#) class.


## 6.52 include/htmlEscape.hpp File Reference

Declare the [Tang::HtmlEscape](#) used to tokenize a Tang script.

```
#include <FlexLexer.h>
Include dependency graph for htmlEscape.hpp:
```

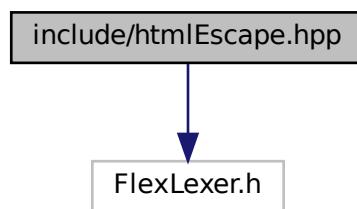

This graph shows which files directly or indirectly include this file:

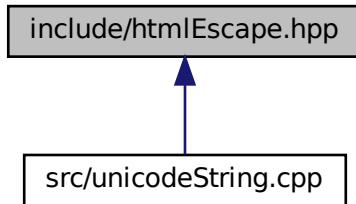

## Classes

- class [Tang::HtmlEscape](#)  
*The Flex lexer class for the main Tang language.*

## Macros

- `#define yyFlexLexer TangHtmlEscapeFlexLexer`
- `#define YY_DECL std::string Tang::HtmlEscape::get_next_token()`

### 6.52.1 Detailed Description


Declare the [Tang::HtmlEscape](#) used to tokenize a Tang script.

## 6.53 include/htmlEscapeAscii.hpp File Reference


Declare the [Tang::HtmlEscapeAscii](#) used to tokenize a Tang script.

```
#include <FlexLexer.h>
#include "unicodeString.hpp"
```

Include dependency graph for htmlEscapeAscii.hpp:

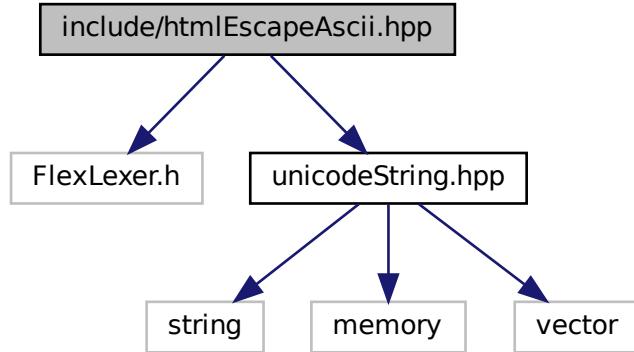

This graph shows which files directly or indirectly include this file:

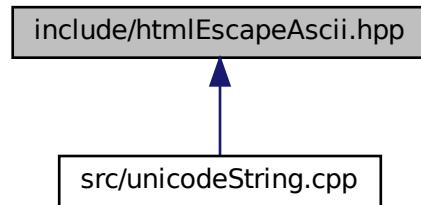

## Classes

- class [Tang::HtmlEscapeAscii](#)  
*The Flex lexer class for the main Tang language.*

## Macros

- `#define yyFlexLexer TangHtmlEscapeAsciiFlexLexer`
- `#define YY_DECL std::string Tang::HtmlEscapeAscii::get_next_token()`

### 6.53.1 Detailed Description


Declare the [Tang::HtmlEscapeAscii](#) used to tokenize a Tang script.

## 6.54 include/macros.hpp File Reference

Contains generic macros.

```
#include <vector>
#include <unordered_map>
#include <map>
#include <string>
#include <any>
```

Include dependency graph for macros.hpp:

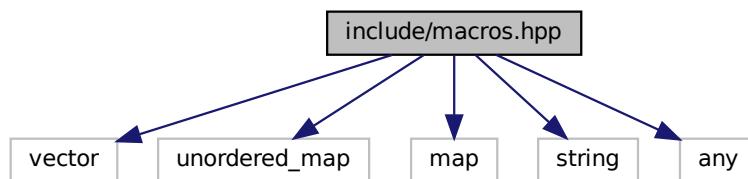

This graph shows which files directly or indirectly include this file:



### Macros

- `#define TANGVERSION "0.0.0 alpha"`

### Typedefs

- `using Tang::integer_t = int32_t`  
*Define the size of signed integers used by Tang.*
- `using Tang::uinteger_t = uint32_t`  
*Define the size of integers used by Tang.*
- `using Tang::float_t = float`  
*Define the size of floats used by Tang.*
- `using Tang::LibraryFunction = GarbageCollected(*)(Context &)`  
*A function pointer that will be executed.*
- `using Tang::NativeFunction = GarbageCollected(*)(std::vector< GarbageCollected > &, Context &)`  
*A function pointer that will be executed as bound to an object.*
- `using Tang::NativeBoundFunction = GarbageCollected(*)(GarbageCollected &, std::vector< GarbageCollected > &)`  
*A function pointer that will be executed as bound to an object.*
- `using Tang::LibraryFunctionMap = std::map< std::string, LibraryFunction >`  
*A map of method names to LibraryFunction objects.*
- `using Tang::NativeBoundFunctionMap = std::map< std::string, std::pair< size_t, NativeBoundFunction > >`  
*A map of method names to NativeBoundFunction objects.*
- `using Tang::ContextData = std::unordered_map< std::string, std::any >`  
*Used to hold arbitrary data which should be made available to a program during the program execution.*


### 6.54.1 Detailed Description

Contains generic macros.

## 6.55 include/opcode.hpp File Reference

Declare the Opcodes used in the Bytecode representation of a program.

```
#include <ostream>
Include dependency graph for opcode.hpp:
```

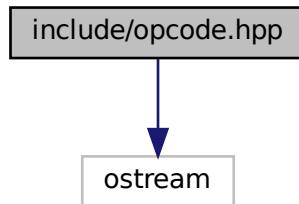

This graph shows which files directly or indirectly include this file:



### Enumerations

- enum class Tang::Opcode {  
 POP , PEEK , POKE , COPY ,  
 JMP , JMPF\_S , JMPF\_I , JMPF\_POP ,  
 JMPT\_S , JMPT\_I , JMPT\_POP , NULLVAL ,  
 INTEGER , FLOAT , BOOLEAN , STRING ,  
 ARRAY , MAP , LIBRARY , LIBRARYSAVE ,  
 LIBRARYCOPY , FUNCTION , ASSIGNINDEX , ADD\_SS ,  
 ADD\_SI , ADD\_IS , ADD\_II , SUBTRACT\_SS ,  
 SUBTRACT\_SI , SUBTRACT\_IS , SUBTRACT\_II , MULTIPLY\_SS ,  
 MULTIPLY\_SI , MULTIPLY\_IS , MULTIPLY\_II , DIVIDE\_SS ,  
 DIVIDE\_SI , DIVIDE\_IS , DIVIDE\_II , MODULO\_SS ,  
 MODULO\_SI , MODULO\_IS , MODULO\_II , NEGATIVE\_S ,  
 NEGATIVE\_I , NOT\_S , NOT\_I , LT\_SS ,  
 LT\_SI , LT\_IS , LT\_II , LTE\_SS ,  
 LTE\_SI , LTE\_IS , LTE\_II , GT\_SS ,  
 GT\_SI , GT\_IS , GT\_II , GTE\_SS ,  
 GTE\_SI , GTE\_IS , GTE\_II , EQ\_SS ,  
 EQ\_SI , EQ\_IS , EQ\_II , NEQ\_SS ,  
 NEQ\_SI , NEQ\_IS , NEQ\_II , PERIOD ,

```
INDEX , SLICE , GETITERATOR , ITERATORNEXT ,
ISITERATOREND , CASTINTEGER_S , CASTINTEGER_I , CASTFLOAT_S ,
CASTFLOAT_I , CASTBOOLEAN_S , CASTBOOLEAN_I , CASTSTRING_S ,
CASTSTRING_I , CALLFUNC , CALLFUNC_I , RETURN ,
PRINT }
```

*All possible Opcodes that may be used in the Bytecode.*

## Functions

- std::ostream & [Tang::operator<<](#) (std::ostream &lhs, const [Tang::Opcode](#) &rhs)  
*Helper to output the name of an opcode.*

### 6.55.1 Detailed Description

Declare the Opcodes used in the Bytecode representation of a program.

### 6.55.2 Enumeration Type Documentation

#### 6.55.2.1 Opcode

```
enum Tang::Opcode [strong]
```

All possible Opcodes that may be used in the Bytecode.

For S/I suffixed Opcodes, (S) indicates that a value will be popped from the stack, and (I) indicates that an index is provided in the bytecode, to be referenced from the frame pointer (fp) during execution.

The S/I order in the Opcode indicates the nature (stack or index) of the associated values. For example, ADD\_SS will add a lhs + rhs. The lhs will have been pushed onto the stack first, followed by the rhs.

#### Enumerator

POP	Pop a val.
PEEK	Stack # (from fp): push val from stack #.
POKE	Stack # (from fp): Copy a val, store @ stack #.
COPY	Stack # (from fp): Deep copy val @ stack #, store @ stack #.
JMP	PC #: set pc to PC #.
JMPF_S	PC #: read val, if false, set pc to PC #.
JMPF_I	PC #: read val, if false, set pc to PC #.
JMPF_POP	PC #: pop val, if false, set pc to PC #.
JMPT_S	PC #: read val, if true, set pc to PC #.
JMPT_I	PC #: read val, if true, set pc to PC #.
JMPT_POP	PC #: pop val, if true, set pc to PC #.
NULLVAL	Push a null onto the stack.
INTEGER	Push an integer onto the stack.
FLOAT	Push a floating point number onto the stack.

## Enumerator

BOOLEAN	Push a boolean onto the stack.
STRING	Get len, char string: push string.
ARRAY	Get len, pop <code>len</code> items, putting them into an array with the last array item popped first.
MAP	Get len, pop <code>len</code> value then key pairs, putting them into a map.
LIBRARY	Pop name, push Library identified by name.
LIBRARYSAVE	Get index, save top of stack to <code>library[index]</code> .
LIBRARYCOPY	Get index, load from <code>library[index]</code> .
FUNCTION	Get argc, PC#: push function(argc, PC #)
ASSIGNINDEX	Pop index, pop collection, pop value, push ( <code>collection[index] = value</code> )
ADD_SS	Push lhs + rhs.
ADD_SI	Push lhs + rhs.
ADD_IS	Push lhs + rhs.
ADD_II	Push lhs + rhs.
SUBTRACT_SS	Push lhs - rhs.
SUBTRACT_SI	Push lhs - rhs.
SUBTRACT_IS	Push lhs - rhs.
SUBTRACT_II	Push lhs - rhs.
MULTIPLY_SS	Push lhs * rhs.
MULTIPLY_SI	Push lhs * rhs.
MULTIPLY_IS	Push lhs * rhs.
MULTIPLY_II	Push lhs * rhs.
DIVIDE_SS	Push lhs / rhs.
DIVIDE_SI	Push lhs / rhs.
DIVIDE_IS	Push lhs / rhs.
DIVIDE_II	Push lhs / rhs.
MODULO_SS	Push lhs % rhs.
MODULO_SI	Push lhs % rhs.
MODULO_IS	Push lhs % rhs.
MODULO_II	Push lhs % rhs.
NEGATIVE_S	Push negative val.
NEGATIVE_I	Push negative val.
NOT_S	Push logical not of val.
NOT_I	Push logical not of val.
LT_SS	Push lhs < rhs.
LT_SI	Push lhs < rhs.
LT_IS	Push lhs < rhs.
LT_II	Push lhs < rhs.
LTE_SS	Push lhs $\leq$ rhs.
LTE_SI	Push lhs $\leq$ rhs.
LTE_IS	Push lhs $\leq$ rhs.
LTE_II	Push lhs $\leq$ rhs.
GT_SS	Push lhs $>$ rhs.
GT_SI	Push lhs $>$ rhs.
GT_IS	Push lhs $>$ rhs.
GT_II	Push lhs $>$ rhs.
GTE_SS	Push lhs $\geq$ rhs.
GTE_SI	Push lhs $\geq$ rhs.
GTE_IS	Push lhs $\geq$ rhs.

## Enumerator

GTE_II	Push lhs $\geq$ rhs.
EQ_SS	Push lhs == rhs.
EQ_SI	Push lhs == rhs.
EQ_IS	Push lhs == rhs.
EQ_II	Push lhs == rhs.
NEQ_SS	Push lhs != rhs.
NEQ_SI	Push lhs != rhs.
NEQ_IS	Push lhs != rhs.
NEQ_II	Push lhs != rhs.
PERIOD	Pop rhs, pop lhs, push lhs.rhs.
INDEX	Pop index, pop collection, push collection[index].
SLICE	Pop skip, pop end, pop begin, pop collection, push collection[begin:end:skip].
GETITERATOR	Pop a collection, push the collection iterator.
ITERATORNEXT	Pop an iterator, push the next iterator value.
ISITERATOREND	Pop a val, push bool(is val == iterator end)
CASTINTEGER_S	Typecast to int, push.
CASTINTEGER_I	Typecast to int, push.
CASTFLOAT_S	Typecast to float, push.
CASTFLOAT_I	Typecast to float, push.
CASTBOOLEAN_S	Typecast to boolean, push.
CASTBOOLEAN_I	Typecast to boolean, push.
CASTSTRING_S	Typecast to string, push.
CASTSTRING_I	Typecast to string, push.
CALLFUNC	Get argc, Pop a function, execute function if argc matches.
CALLFUNC_I	Get argc, get index, execute function at index if argc matches.
RETURN	Get stack #, pop return val, pop (stack #) times, push val, restore fp, restore pc.
PRINT	Pop val, print(val), push error or NULL.

## 6.55.3 Function Documentation

## 6.55.3.1 operator&lt;&lt;()

```
ostream & Tang::operator<< (
    std::ostream & lhs,
    const Tang::Opcode & rhs )
```

Helper to output the name of an opcode.

## Parameters

<i>lhs</i>	The ostream to write into.
<i>rhs</i>	The Opcode whose name should be output.

**Returns**

The ostream that was written to.

Here is the call graph for this function:




## 6.56 include/percentEncode.hpp File Reference


Declare the [Tang::PercentEncode](#) used to tokenize a Tang script.

```
#include <FlexLexer.h>
```

Include dependency graph for percentEncode.hpp:

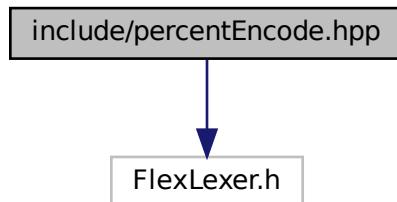

This graph shows which files directly or indirectly include this file:

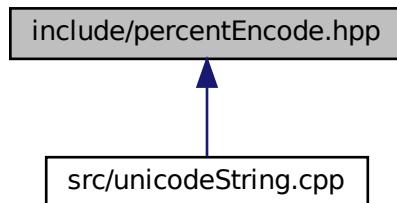

## Classes

- class `Tang::PercentEncode`

*The Flex lexer class for the Percent Encode scanner.*

## Macros

- `#define yyFlexLexer TangPercentEncodeFlexLexer`
  - `#define YY_DECL std::string Tang::PercentEncode::get_next_token()`

### 6.56.1 Detailed Description


Declare the `Tang::PercentEncode` used to tokenize a Tang script.

## 6.57 include/program.hpp File Reference

Declare the `Tang::Program` class used to compile and execute source code.

```
#include <map>
#include <optional>
#include <set>
#include <string>
#include <vector>
#include "astNode.hpp"
#include "computedExpression.hpp"
#include "context.hpp"
#include "error.hpp"
#include "garbageCollected.hpp"
#include "macros.hpp"
#include "opcode.hpp"
#include "unicodeString.hpp"
Include dependency graph for program.hpp:
```

Include dependency graph for program.mpp.

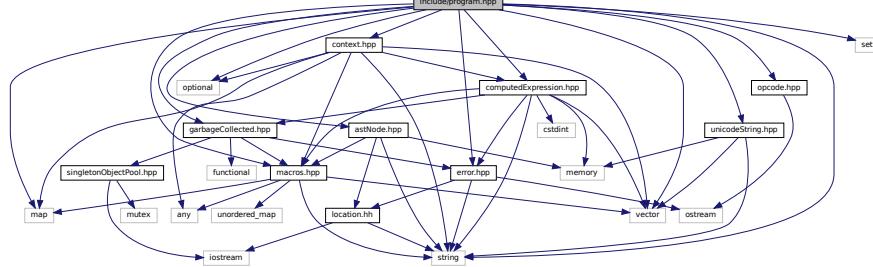

This graph shows which files directly or indirectly include this file:

## Classes

- class [Tang::Program](#)  
*Represents a compiled script or template that may be executed.*

## Typedefs

- using [Tang::Bytecode](#) = std::vector< [Tang::uinteger\\_t](#) >  
*Contains the Opcodes of a compiled program.*
- using [Tang::OpcodeOffsets](#) = std::map< [Opcode](#), std::vector< std::pair< [size\\_t](#), [size\\_t](#) > >>  
*Map of Opcodes to a pair of offsets, with the first position being the Bytecode offset, and the second position being the position of the Opcode relative to the other Opcodes (e.g., the Nth position).*
- using [Tang::OpcodePositions](#) = std::vector< std::pair< [Opcode](#), [size\\_t](#) > >  
*Vector of Opcodes in positional order.*
- using [Tang::OpcodeAnnotations](#) = std::map< [size\\_t](#), std::string >  
*Map of Bytecode offsets to a string annotation.*

### 6.57.1 Detailed Description

Declare the [Tang::Program](#) class used to compile and execute source code.

### 6.57.2 Typedef Documentation

#### 6.57.2.1 OpcodePositions

```
using Tang::OpcodePositions = typedef std::vector<std::pair<Opcode, size\_t> >
```


Vector of Opcodes in positional order.

Each entry is a pair, specifying the Opcode and the Bytecode offset.


## 6.58 include/singletonObjectPool.hpp File Reference

Declare the [Tang::SingletonObjectPool](#) class.

```
#include <mutex>
#include <iostream>
Include dependency graph for singletonObjectPool.hpp:
```

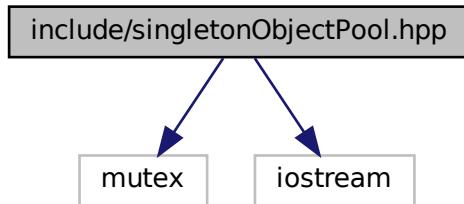

This graph shows which files directly or indirectly include this file:



## Classes

- class [Tang::SingletonObjectPool< T >](#)  
*A thread-safe, singleton object pool of the designated type.*

## Macros

- [#define GROW 1024](#)  
*The threshold size to use when allocating blocks of data, measured in the number of instances of the object type.*

### 6.58.1 Detailed Description


Declare the [Tang::SingletonObjectPool](#) class.

## 6.59 include/tang.hpp File Reference


Header file supplied for use by 3rd party code so that they can easily include all necessary headers.

```
#include "macros.hpp"
#include "tangBase.hpp"
#include "astNode.hpp"
#include "error.hpp"
#include "garbageCollected.hpp"
```

```
#include "program.hpp"
#include "context.hpp"
#include "opcode.hpp"
#include "computedExpression.hpp"
#include "computedExpressionString.hpp"
#include "computedExpressionNativeFunction.hpp"
#include "computedExpressionInteger.hpp"
#include "computedExpressionError.hpp"
Include dependency graph for tang.hpp:
```

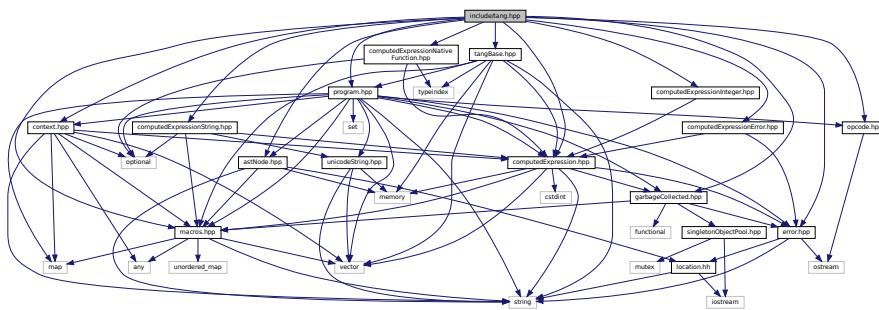

This graph shows which files directly or indirectly include this file:

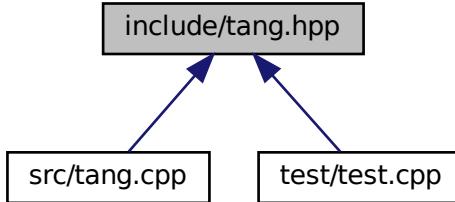

### 6.59.1 Detailed Description


Header file supplied for use by 3rd party code so that they can easily include all necessary headers.

## 6.60 include/tangBase.hpp File Reference


Declare the [Tang::TangBase](#) class used to interact with Tang.

```
#include <memory>
#include <string>
#include <typeindex>
#include <vector>
#include "macros.hpp"
```

```
#include "program.hpp"
#include "computedExpression.hpp"
Include dependency graph for tangBase.hpp:
```

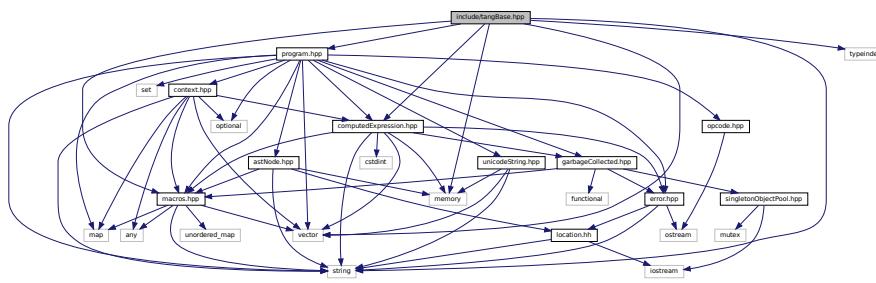

This graph shows which files directly or indirectly include this file:

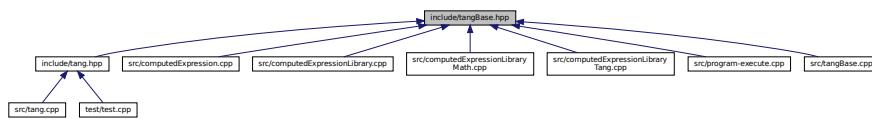

## Classes

- class [Tang::TangBase](#)  
*The base class for the Tang programming language.*

### 6.60.1 Detailed Description


Declare the [Tang::TangBase](#) class used to interact with Tang.

## 6.61 include/tangScanner.hpp File Reference


Declare the [Tang::TangScanner](#) used to tokenize a Tang script.

```
#include <FlexLexer.h>
#include <iostream>
```

```
#include "tangParser.hpp"
Include dependency graph for tangScanner.hpp:
```

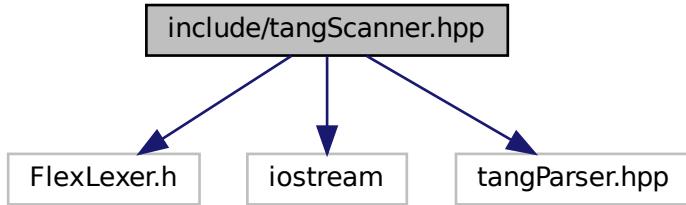

This graph shows which files directly or indirectly include this file:

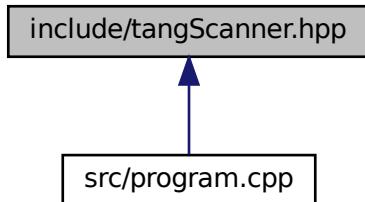

## Classes

- class [Tang::TangScanner](#)  
*The Flex lexer class for the main Tang language.*

## Macros

- `#define yyFlexLexer TangTangFlexLexer`
- `#define YY_DECL Tang::TangParser::symbol_type Tang::TangScanner::get_next_token()`


### 6.61.1 Detailed Description

Declare the [Tang::TangScanner](#) used to tokenize a Tang script.


## 6.62 include/unescape.hpp File Reference

Declare the [Tang::Unescape](#) used to tokenize a Tang script.

```
#include <FlexLexer.h>
Include dependency graph for unescape.hpp:
```

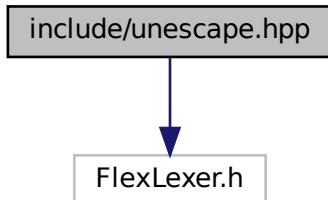

This graph shows which files directly or indirectly include this file:

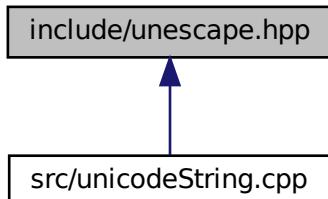

### Classes

- class [Tang::Unescape](#)  
*The Flex lexer class for the main Tang language.*

### Macros

- `#define yyFlexLexer TangUnescapeFlexLexer`
- `#define YY_DECL std::string Tang::Unescape::get_next_token()`


#### 6.62.1 Detailed Description

Declare the [Tang::Unescape](#) used to tokenize a Tang script.

## 6.63 include/unicodeString.hpp File Reference

Contains the code to interface with the ICU library.

```
#include <string>
#include <memory>
#include <vector>
Include dependency graph for unicodeString.hpp:
```

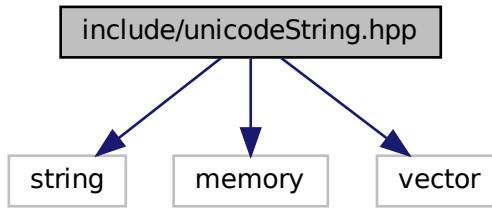

This graph shows which files directly or indirectly include this file:



### Classes

- class [Tang::UnicodeString](#)  
*Represents a UTF-8 encoded string that is Unicode-aware.*

### Functions

- std::string [Tang::unescape](#) (const std::string &str)  
*Return an "unescaped" version of the provided string, which, when interpreted by Tang, should result in a representation equivalent to the original source string.*
- std::string [Tang::htmlEscape](#) (const std::string &str)  
*Return an "html escaped" version of the provided string.*
- std::string [Tang::htmlEscapeAscii](#) (const std::string &str, [UnicodeString::Type](#) type=[UnicodeString::Type::Untrusted](#))  
*Return an Ascii-only, "html escaped" version of the provided string.*
- std::string [Tang::percentEncode](#) (const std::string &str)  
*Return a "percent encoded" version of the provided string.*

### 6.63.1 Detailed Description

Contains the code to interface with the ICU library.

## 6.63.2 Function Documentation

### 6.63.2.1 htmlEscape()

```
string Tang::htmlEscape (
    const std::string & str )
```

Return an "html escaped" version of the provided string.

Only "critical" characters <, >, &, ", and `` will be escaped. All other characters will be allowed through unaltered. The result is a UTF-8 encoded string that is safe for inclusion in an HTML template without disturbing the HTML structure.

#### Parameters

<code>str</code>	The string to be escaped.
------------------	---------------------------

#### Returns

An "escaped" version of the provided string.

Here is the call graph for this function:



### 6.63.2.2 htmlEscapeAscii()

```
string Tang::htmlEscapeAscii (
    const std::string & str,
    UnicodeString::Type type = UnicodeString::Type::Untrusted )
```

Return an Ascii-only, "html escaped" version of the provided string.

This function will convert all characters into an Ascii-only representation of the provided UTF-8 encoded string. Visible, standard Ascii characters will pass through unaltered, but all others will be replaced by their HTML escape sequence (if it exists), or the appropriate hexadecimal escape code.


## Parameters

<i>str</i>	The string to be escaped.
------------	---------------------------

## Returns

An "escaped" version of the provided string.

Here is the call graph for this function:

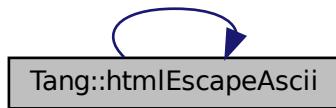

### 6.63.2.3 percentEncode()

```
std::string Tang::percentEncode (   
    const std::string & str )
```

Return a "percent encoded" version of the provided string.

See <https://en.wikipedia.org/wiki/Percent-encoding> for details.


## Parameters

<i>str</i>	The string to be escaped.
------------	---------------------------

**Returns**

A "percent encoded" version of the provided string.

Here is the call graph for this function:

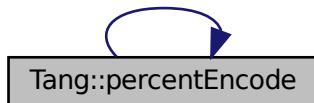

#### 6.63.2.4 unescape()

```
string Tang::unescape (
    const std::string & str )
```

Return an "unescaped" version of the provided string, which, when interpreted by Tang, should result in a representation equivalent to the original source string.

**Parameters**

<code>str</code>	The string to be unescaped.
------------------	-----------------------------

**Returns**

An "unescaped" version of the provided string.


Here is the call graph for this function:



## 6.64 src/astNode.cpp File Reference

Define the [Tang::AstNode](#) class.

```
#include <iostream>
#include "macros.hpp"
#include "astNode.hpp"
#include "program.hpp"
#include "opcode.hpp"
Include dependency graph for astNode.cpp:
```

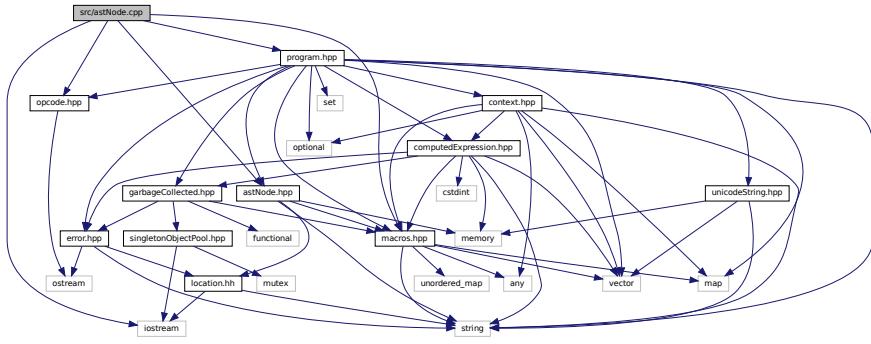


### 6.64.1 Detailed Description

Define the `Tang::AstNode` class.

## 6.65 src/astNodeArray.cpp File Reference

Define the `Tang::AstNodeArray` class.

```
#include <bit>
#include "astNodeArray.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeArray.cpp:
```

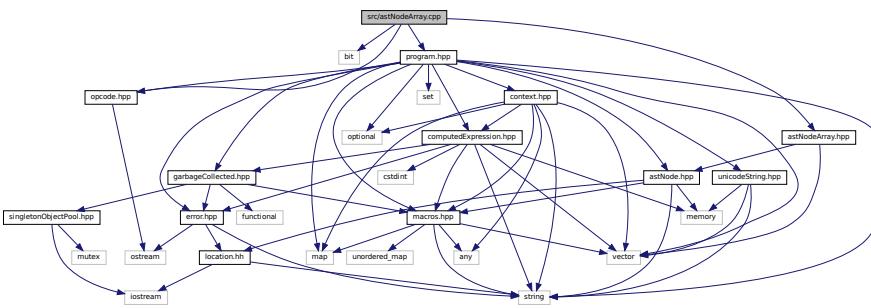


### 6.65.1 Detailed Description

Define the `Tang::AstNodeArray` class.

## 6.66 src/astNodeAssign.cpp File Reference

Define the [Tang::AstNodeAssign](#) class.

```
#include <string>
#include "astNodeAssign.hpp"
#include "astNodeIdentifier.hpp"
#include "astNodeIndex.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeAssign.cpp:
```

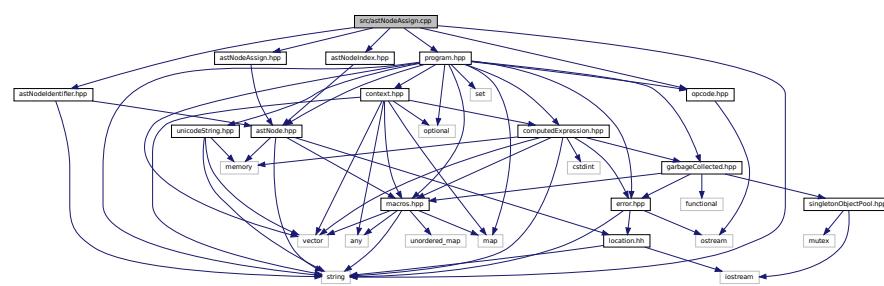


### 6.66.1 Detailed Description

Define the [Tang::AstNodeAssign](#) class.

## 6.67 src/astNodeBinary.cpp File Reference

Define the [Tang::AstNodeBinary](#) class.

```
#include <string>
#include "astNodeBinary.hpp"
#include "astNodeIdentifier.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeBinary.cpp:
```

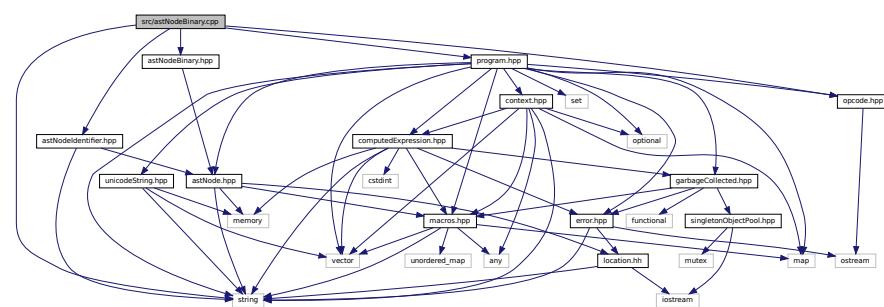

## Macros

- `#define BINARYOP(OP_SS, OP_SI, OP_IS, OP_II)`
  - `#define LOGICALOP(OP_S, OP_I)`


### 6.67.1 Detailed Description

Define the `Tang::AstNodeBinary` class.

## 6.68 src/astNodeBlock.cpp File Reference

Define the `Tang::AstNodeBlock` class.

```
#include <bit>
#include "astNodeBlock.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeBlock.cpp:
```

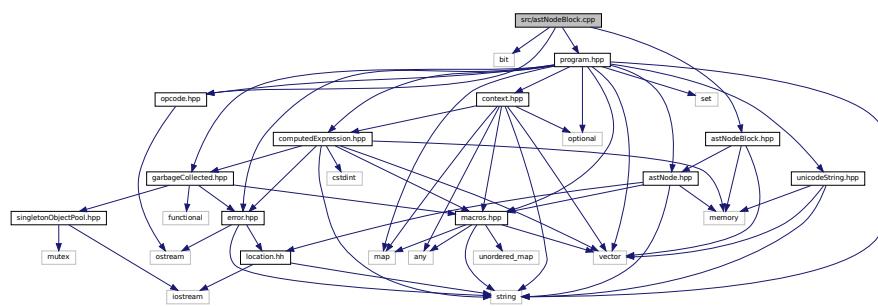

### 6.68.1 Detailed Description


Define the `Tang::AstNodeBlock` class.

## 6.69 src/astNodeBoolean.cpp File Reference

Define the `Tang::AstNodeBoolean` class.

```
#include <bit>
#include "astNodeBoolean.hpp"
#include "opcode.hpp"
```

```
#include "program.hpp"
Include dependency graph for astNodeBoolean.cpp:
```

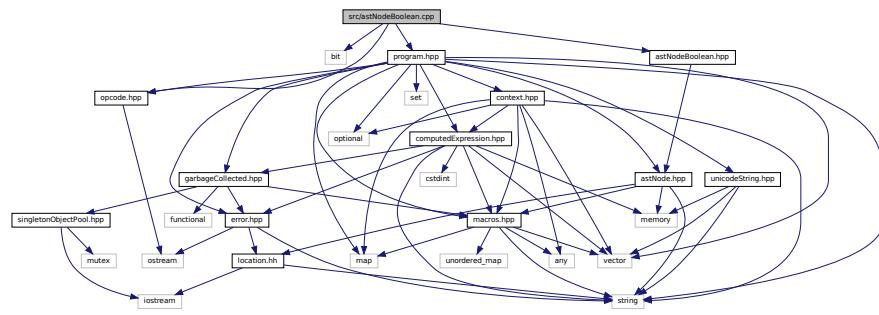


### 6.69.1 Detailed Description

Define the `Tang::AstNodeBoolean` class.

## 6.70 src/astNodeBreak.cpp File Reference

Define the `Tang::AstNodeBreak` class.

```
#include <bit>
#include "astNodeBreak.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeBreak.cpp:
```

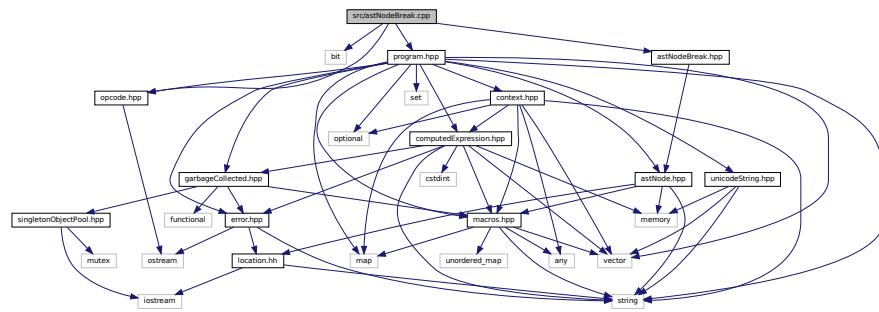


### 6.70.1 Detailed Description

Define the `Tang::AstNodeBreak` class.

## 6.71 src/astNodeCast.cpp File Reference

Define the [Tang::AstNodeCast](#) class.

```
#include <bit>
#include "astNodeCast.hpp"
#include "astNodeIdentifier.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeCast.cpp:
```

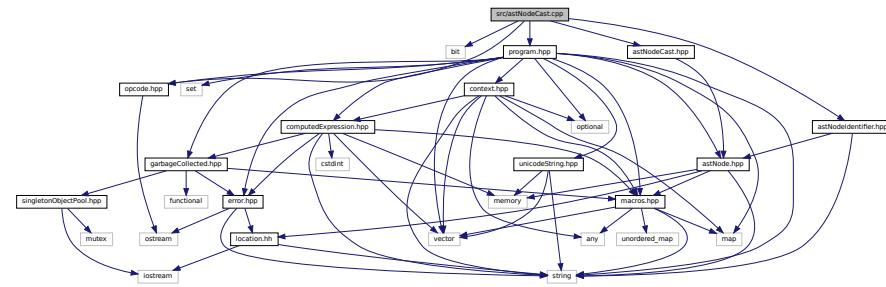

### Macros

- `#define CASTOP(OP_S, OP_I)`

#### 6.71.1 Detailed Description

Define the [Tang::AstNodeCast](#) class.

#### 6.71.2 Macro Definition Documentation

##### 6.71.2.1 CASTOP

```
#define CASTOP(
    OP_S,
    OP_I
)
```


###### Value:

```
integer_t index{-1}; \
auto & identifier = program.getIdentifiers(); \
if (typeid(*this->expression) == typeid(AstNodeIdentifier)) { \
    auto & name = static_cast<AstNodeIdentifier &>(*this->expression).name; \
    if (identifier.count(name)) { \
        index = identifier.at(name); \
    } \
} \
if (index >= 0) { \
    program.addBytecode((integer_t)Opcode:: OP_I); \
    program.addBytecode((integer_t)index); \
} \
else { \
    this->expression->compile(program); \
    program.addBytecode((integer_t)Opcode:: OP_S); \
} \
return;
```

## 6.72 src/astNodeContinue.cpp File Reference

Define the `Tang::AstNodeContinue` class.

```
#include <bit>
#include "astNodeContinue.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeContinue.cpp:
```

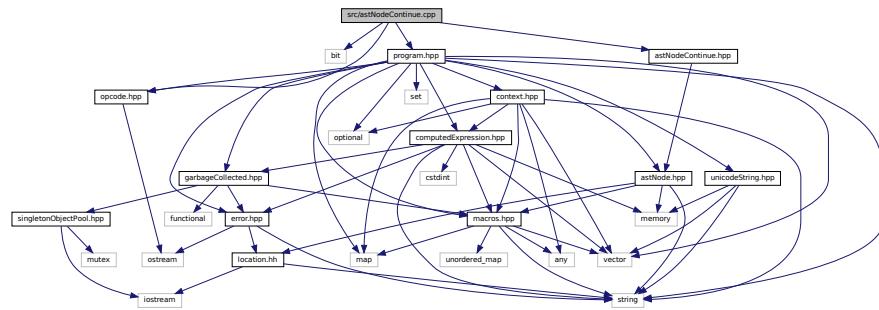


### 6.72.1 Detailed Description

Define the `Tang::AstNodeContinue` class.

## 6.73 src/astNodeDoWhile.cpp File Reference

Define the `Tang::AstNodeDoWhile` class.

```
#include <string>
#include <bit>
#include "astNodeDoWhile.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeDoWhile.cpp:
```

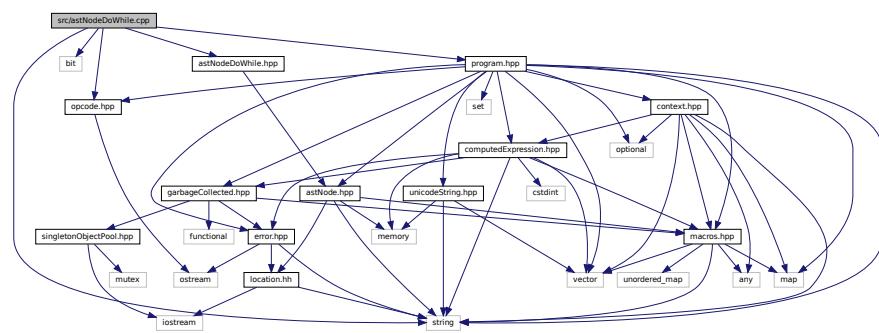


### 6.73.1 Detailed Description

Define the [Tang::AstNodeDoWhile](#) class.

## 6.74 src/astNodeFloat.cpp File Reference

Define the [Tang::AstNodeFloat](#) class.

```
#include <bit>
#include "astNodeFloat.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeFloat.cpp:
```

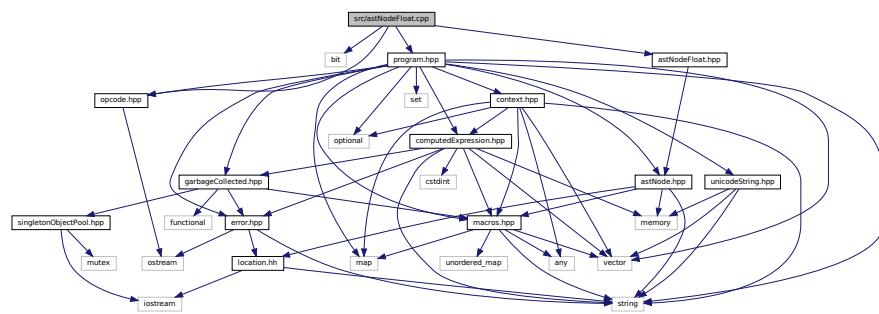


### 6.74.1 Detailed Description

Define the [Tang::AstNodeFloat](#) class.

## 6.75 src/astNodeFor.cpp File Reference

Define the [Tang::AstNodeFor](#) class.

```
#include <string>
#include <bit>
#include "astNodeFor.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeFor.cpp:
```

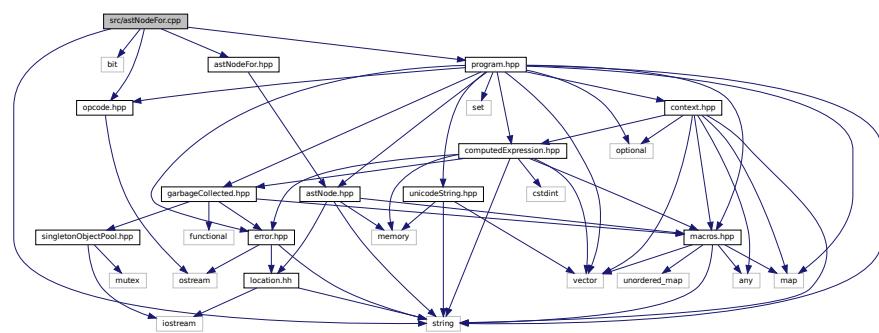


### 6.75.1 Detailed Description

Define the [Tang::AstNodeFor](#) class.

## 6.76 src/astNodeFunctionCall.cpp File Reference

Define the [Tang::AstNodeFunctionCall](#) class.

```
#include <string>
#include "astNodeIdentifier.hpp"
#include "astNodeFunctionCall.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeFunctionCall.cpp:
```

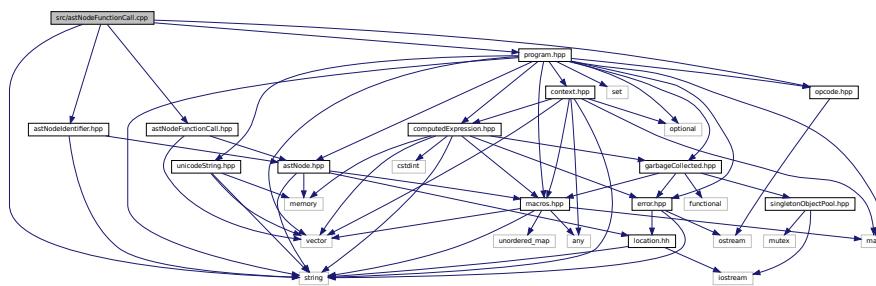


### 6.76.1 Detailed Description

Define the [Tang::AstNodeFunctionCall](#) class.

## 6.77 src/astNodeFunctionDeclaration.cpp File Reference

Define the [Tang::AstNodeFunctionDeclaration](#) class.

```
#include <string>
#include <bit>
#include "astNodeFunctionDeclaration.hpp"
#include "astNodeString.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeFunctionDeclaration.cpp:
```

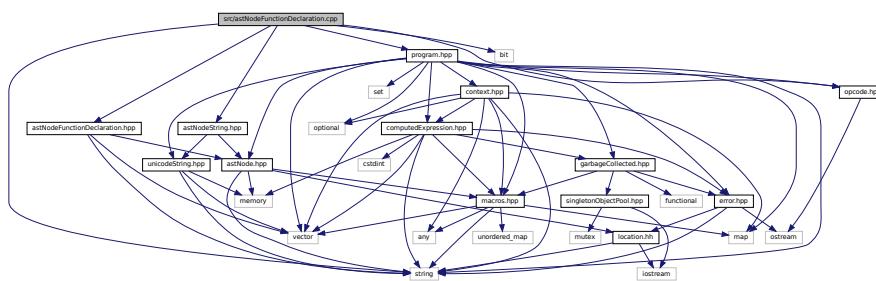

### 6.77.1 Detailed Description


Define the `Tang::AstNodeFunctionDeclaration` class.

## 6.78 src/astNodIdentifier.cpp File Reference

Define the `Tang::AstNodeIdentifier` class.

```
#include <bit>
#include "astNodeIdentifier.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeIdentifier.cpp
```

include dependency graph for astNodeVisitor.cpp.

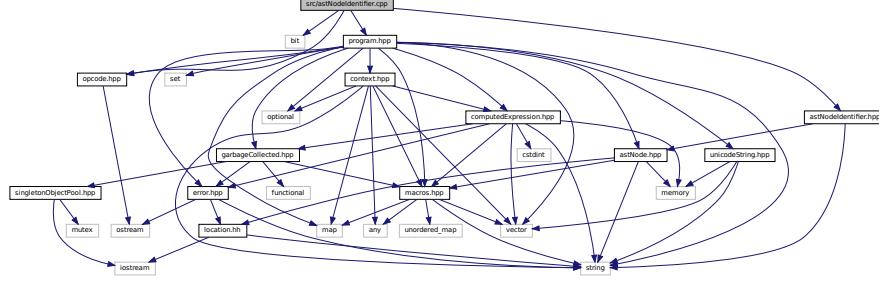

### 6.78.1 Detailed Description


Define the `Tang::AstNodeIdentifier` class.

## 6.79 src/astNodeIfElse.cpp File Reference

Define the `Tang::AstNodeIfElse` class.

```
#include <string>
#include <bit>
#include "astNodeIfElse.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeIfElse.cpp:
```

Include dependency graph for astNodeIfElse.cpp:

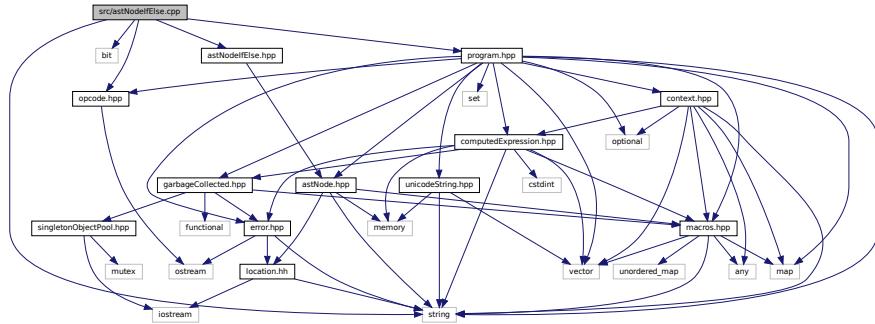


### 6.79.1 Detailed Description

Define the [Tang::AstNodeIfElse](#) class.

## 6.80 src/astNodeIndex.cpp File Reference

Define the [Tang::AstNodeIndex](#) class.

```
#include <string>
#include <bit>
#include "astNodeIndex.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeIndex.cpp:
```

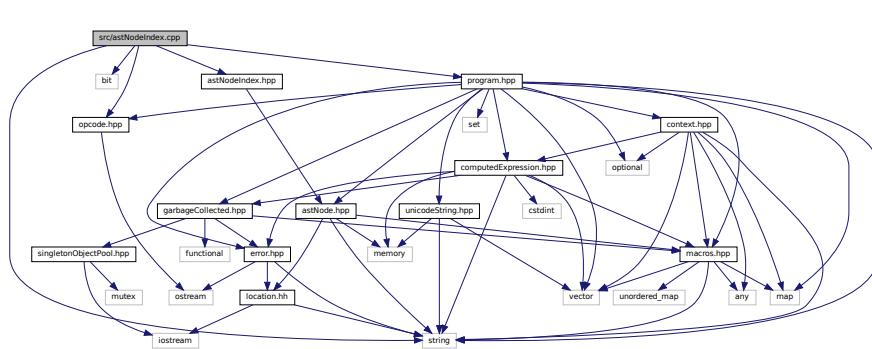


### 6.80.1 Detailed Description

Define the [Tang::AstNodeIndex](#) class.

## 6.81 src/astNodeInteger.cpp File Reference

Define the [Tang::AstNodeInteger](#) class.

```
#include <bit>
#include "astNodeInteger.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeInteger.cpp:
```

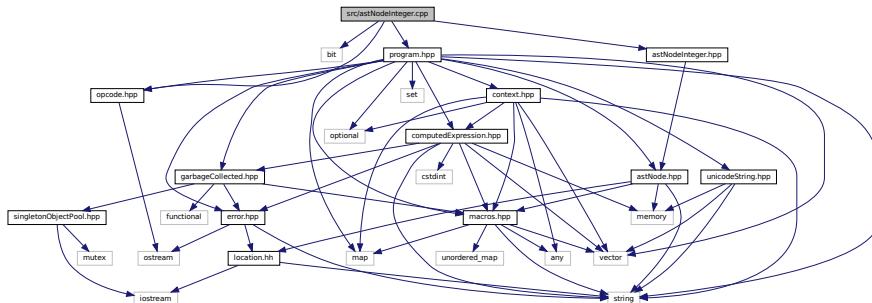

### 6.81.1 Detailed Description


Define the `Tang::AstNodeInteger` class.

## 6.82 src/astNodeLibrary.cpp File Reference

Define the `Tang::AstNodeLibrary` class.

```
#include <bit>
#include "opcode.hpp"
#include "astNodeLibrary.hpp"
#include "astNodeIdentifier.hpp"
#include "program.hpp"
Include dependency graph for astNodeLibrary.cpp
```

Include dependency graph for astNodeLibrary.cpp.

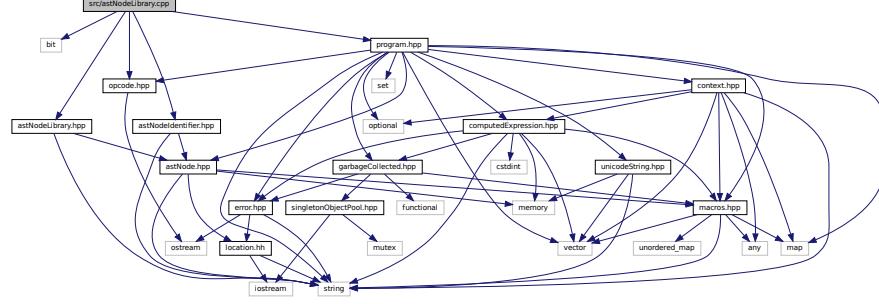

### 6.82.1 Detailed Description


Define the `Tang::AstNodeLibrary` class.

## 6.83 src/astNodeMap.cpp File Reference

Define the `Tang::AstNodeMap` class.

```
#include <bit>
#include "astNodeMap.hpp"
#include "astNodeString.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeMap.hpp:
```

Include dependency graph for astNodeMap.cpp:

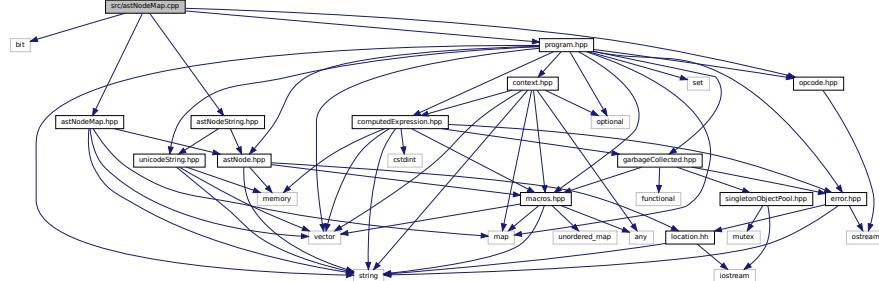

### 6.83.1 Detailed Description


Define the `Tang::AstNodeMap` class.

## 6.84 src/astNodePeriod.cpp File Reference

Define the `Tang::AstNodePeriod` class.

```
#include <string>
#include <bit>
#include "astNodePeriod.hpp"
#include "astNodeString.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodePeriod.cpp:
```

Include dependency graph for astNodePeriod.cpp:

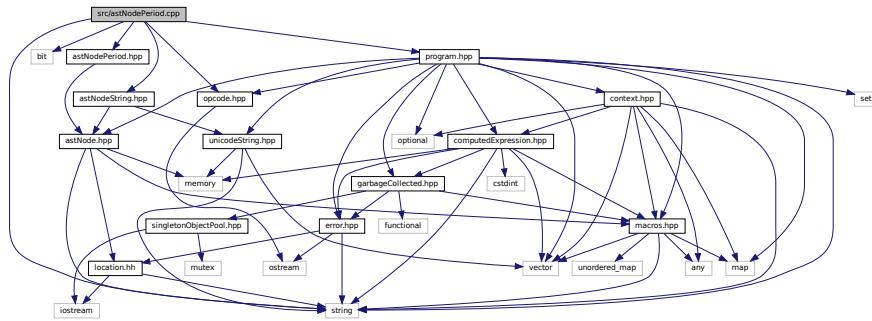

### 6.84.1 Detailed Description


Define the `Tang::AstNodePeriod` class.

## 6.85 src/astNodePrint.cpp File Reference

Define the `Tang::AstNodePrint` class.

```
#include <string>
#include "astNodePrint.hpp"
#include "opcode.hpp"
#include "instruction.hpp"
```

```
#include "program.hpp"
```

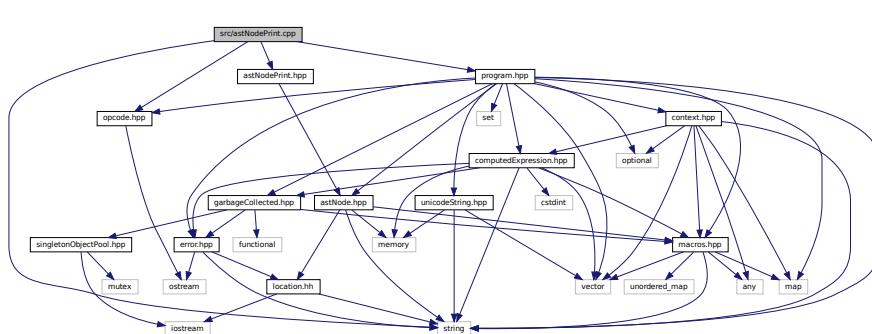


### 6.85.1 Detailed Description

Define the [Tang::AstNodePrint](#) class.

## 6.86 src/astNodeRangedFor.cpp File Reference

Define the [Tang::AstNodeRangedFor](#) class.

```
#include <string>
#include <sstream>
#include <bit>
#include "astNodeRangedFor.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeRangedFor.cpp:
```

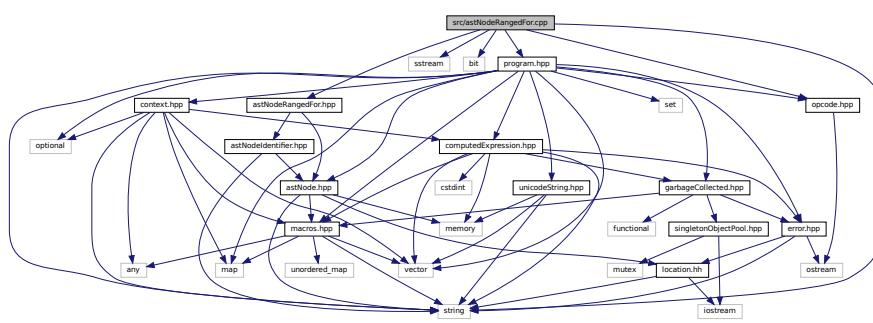

### 6.86.1 Detailed Description


Define the [Tang::AstNodeRangedFor](#) class.

## 6.87 src/astNodeReturn.cpp File Reference

Define the [Tang::AstNodeReturn](#) class.

```
#include <string>
#include <bit>
#include "astNodeReturn.hpp"
#include "opcode.hpp"
```

```
#include "program.hpp"
Include dependency graph for astNodeReturn.cpp:
```

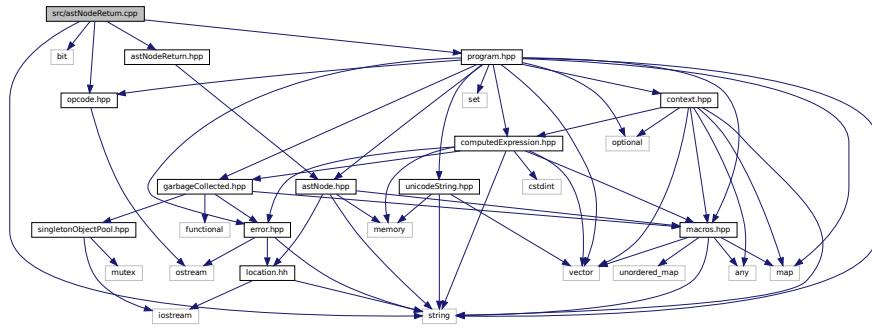


### 6.87.1 Detailed Description

Define the `Tang::AstNodeReturn` class.

## 6.88 src/astNodeSlice.cpp File Reference

Define the `Tang::AstNodeSlice` class.

```
#include <string>
#include <bit>
#include "astNodeSlice.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeSlice.cpp:
```

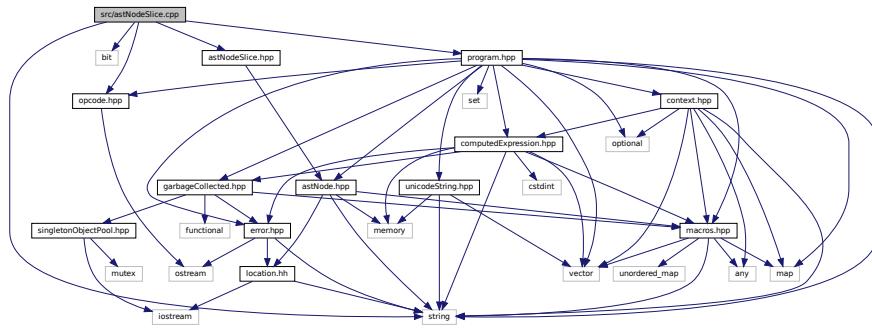


### 6.88.1 Detailed Description

Define the `Tang::AstNodeSlice` class.

## 6.89 src/astNodeString.cpp File Reference

Define the [Tang::AstNodeString](#) class.

```
#include <bit>
#include <cmath>
#include <string.h>
#include "astNodeString.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeString.cpp:
```

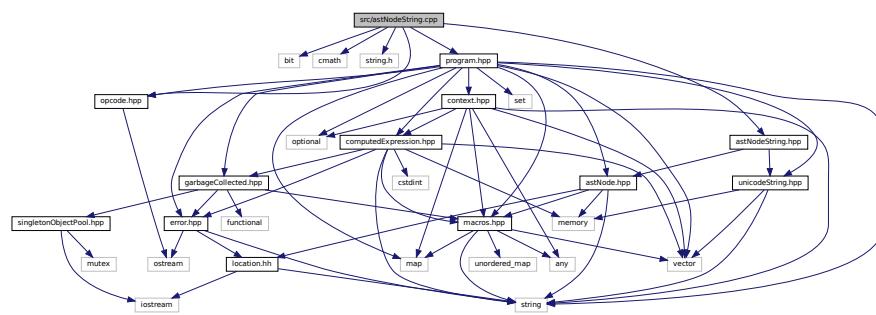


### 6.89.1 Detailed Description

Define the [Tang::AstNodeString](#) class.

## 6.90 src/astNodeTernary.cpp File Reference

Define the [Tang::AstNodeTernary](#) class.

```
#include <string>
#include <bit>
#include "astNodeTernary.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeTernary.cpp:
```

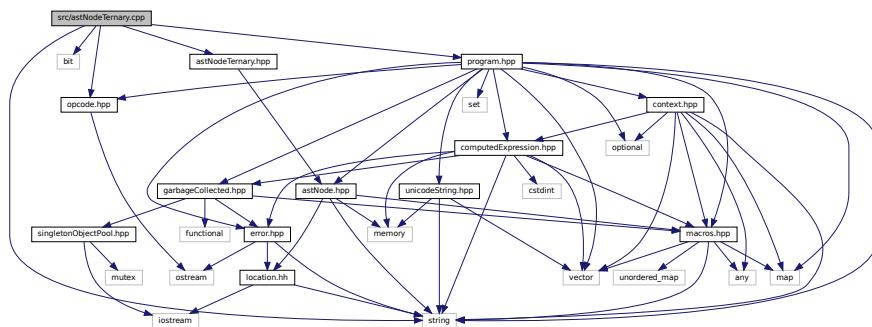


### 6.90.1 Detailed Description

Define the `Tang::AstNodeTernary` class.

## 6.91 src/astNodeUnary.cpp File Reference

Define the `Tang::AstNodeUnary` class.

```
#include <string>
#include <bit>
#include "astNodeIdentifier.hpp"
#include "astNodeUnary.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeUnary.cpp:
```

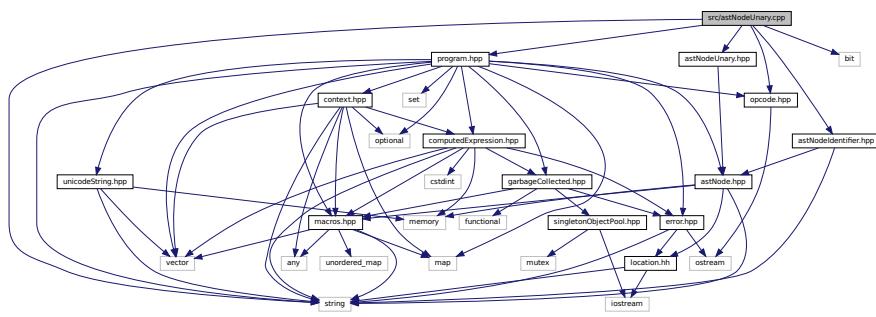

## Macros

- `#define UNARYOP(OP_S, OP_I)`

### 6.91.1 Detailed Description

Define the `Tang::AstNodeUnary` class.

## 6.91.2 Macro Definition Documentation

### 6.91.2.1 UNARYOP


```
#define UNARYOP (
    OP_S,
    OP_I
)

Value:
integer_t index{-1}; \
auto & identifier = program.getIdentifiers(); \
if (typeid(*this->operand) == typeid(AstNodeIdentifier)) { \
    auto & name = static_cast<AstNodeIdentifier &>(*this->operand).name; \
    if (identifier.count(name)) { \
        index = identifier.at(name); \
    } \
} \
if (index >= 0) { \
    program.addBytecode((uinteger_t)Opcode:: OP_I); \
    program.addBytecode((uinteger_t)index); \
} \
else { \
    this->operand->compile(program); \
    program.addBytecode((uinteger_t)Opcode:: OP_S); \
} \
return;
```

## 6.92 src/astNodeUse.cpp File Reference

Define the [Tang::AstNodeUse](#) class.

```
#include <bit>
#include "opcode.hpp"
#include "astNodeUse.hpp"
#include "astNodeIdentifier.hpp"
#include "program.hpp"
Include dependency graph for astNodeUse.hpp:
```

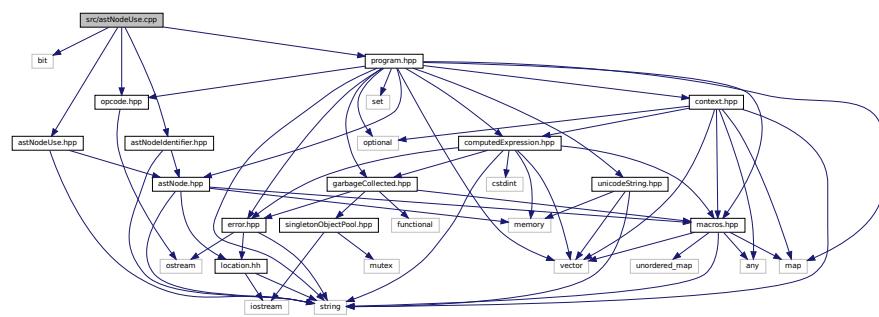


### 6.92.1 Detailed Description

Define the [Tang::AstNodeUse](#) class.

## 6.93 src/astNodeWhile.cpp File Reference

Define the `Tang::AstNodeWhile` class.

```
#include <string>
#include <bit>
#include "astNodeWhile.hpp"
#include "opcode.hpp"
#include "program.hpp"
Include dependency graph for astNodeWhile.cpp:
```

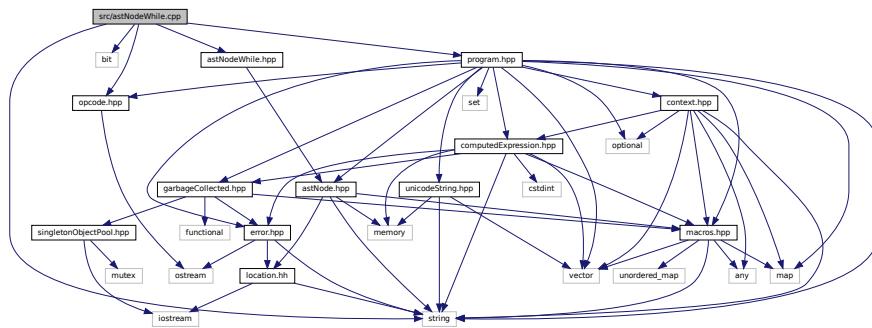


### 6.93.1 Detailed Description

Define the `Tang::AstNodeWhile` class.

## 6.94 src/computedExpression.cpp File Reference

Define the `Tang::ComputedExpression` class.

```
#include <typeinfo>
#include "computedExpression.hpp"
#include "computedExpressionBoolean.hpp"
#include "computedExpressionString.hpp"
#include "computedExpressionNativeBoundFunction.hpp"
#include "computedExpressionError.hpp"
#include "tangBase.hpp"
Include dependency graph for computedExpression.cpp:
```

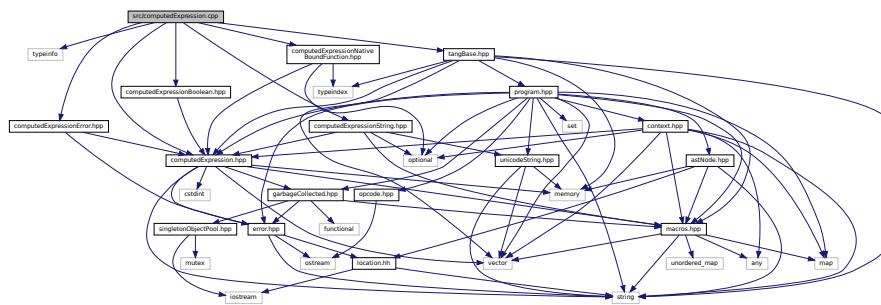


### 6.94.1 Detailed Description

Define the [Tang::ComputedExpression](#) class.

## 6.95 src/computedExpressionArray.cpp File Reference

Define the [Tang::ComputedExpressionArray](#) class.

```
#include "computedExpressionArray.hpp"
#include "computedExpressionInteger.hpp"
#include "computedExpressionBoolean.hpp"
#include "computedExpressionString.hpp"
#include "computedExpressionIterator.hpp"
#include "computedExpressionIteratorEnd.hpp"
#include "computedExpressionError.hpp"
Include dependency graph for computedExpressionArray.hpp:
```

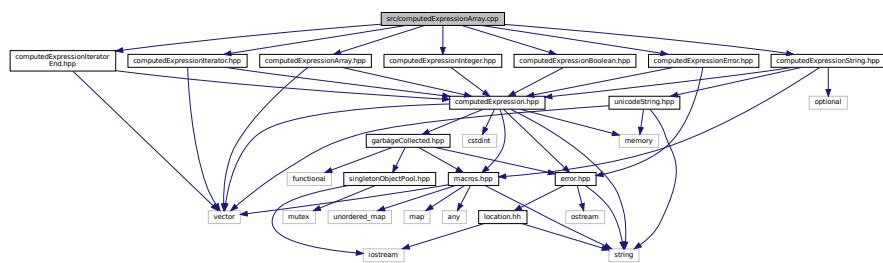

### 6.95.1 Detailed Description


Define the [Tang::ComputedExpressionArray](#) class.

## 6.96 src/computedExpressionBoolean.cpp File Reference

Define the [Tang::ComputedExpressionBoolean](#) class.

```
#include "computedExpressionBoolean.hpp"
#include "computedExpressionInteger.hpp"
#include "computedExpressionFloat.hpp"
```

```
#include "computedExpressionError.hpp"
Include dependency graph for computedExpressionBoolean.cpp:
```

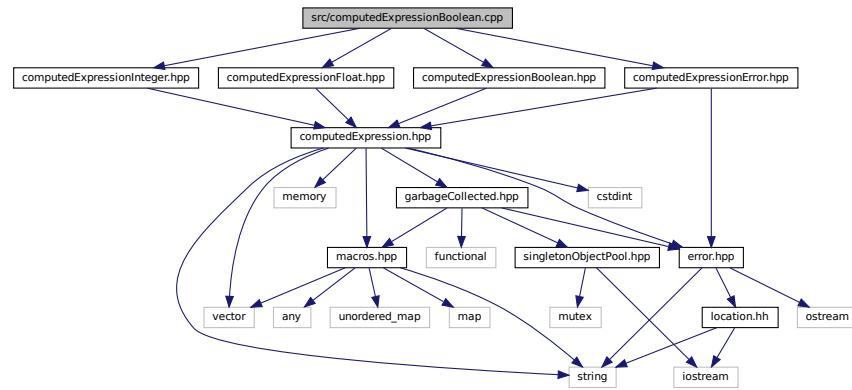


### 6.96.1 Detailed Description

Define the [Tang::ComputedExpressionBoolean](#) class.

## 6.97 src/computedExpressionCompiledFunction.cpp File Reference

Define the [Tang::ComputedExpressionCompiledFunction](#) class.

```
#include "computedExpressionCompiledFunction.hpp"
#include "computedExpressionFloat.hpp"
#include "computedExpressionBoolean.hpp"
#include "computedExpressionString.hpp"
#include "computedExpressionError.hpp"
Include dependency graph for computedExpressionCompiledFunction.cpp:
```

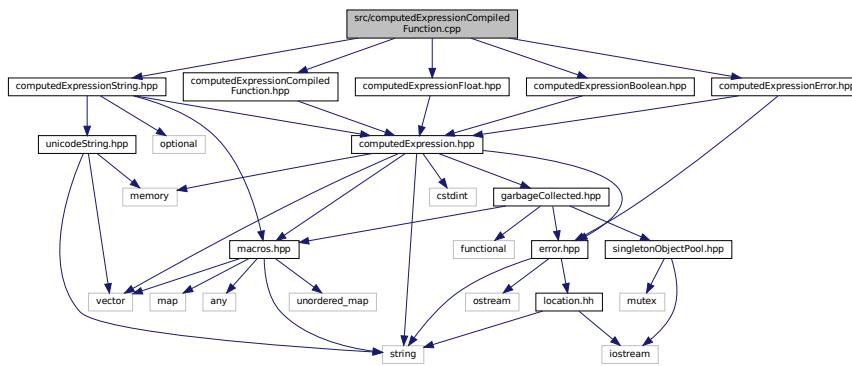


### 6.97.1 Detailed Description

Define the [Tang::ComputedExpressionCompiledFunction](#) class.

## 6.98 src/computedExpressionError.cpp File Reference

Define the [Tang::ComputedExpressionError](#) class.

```
#include "computedExpressionError.hpp"
Include dependency graph for computedExpressionError.cpp:
```

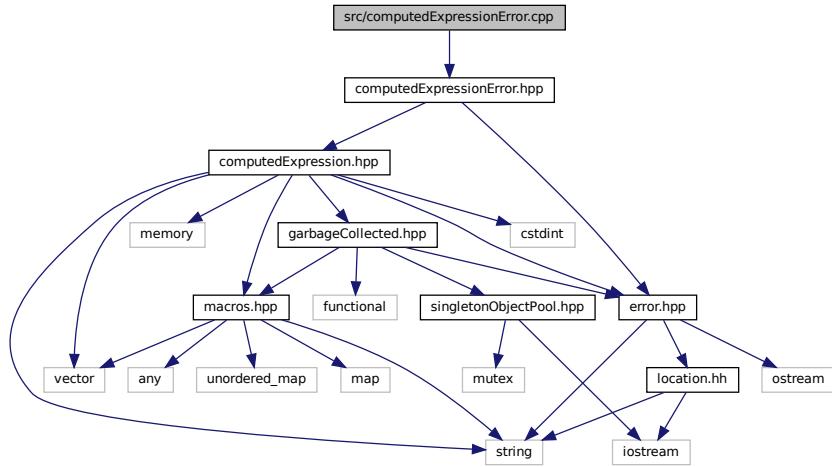


### 6.98.1 Detailed Description

Define the [Tang::ComputedExpressionError](#) class.

## 6.99 src/computedExpressionFloat.cpp File Reference

Define the [Tang::ComputedExpressionFloat](#) class.

```
#include "computedExpressionFloat.hpp"
#include "computedExpressionInteger.hpp"
#include "computedExpressionBoolean.hpp"
#include "computedExpressionString.hpp"
#include "computedExpressionError.hpp"
Include dependency graph for computedExpressionFloat.cpp:
```

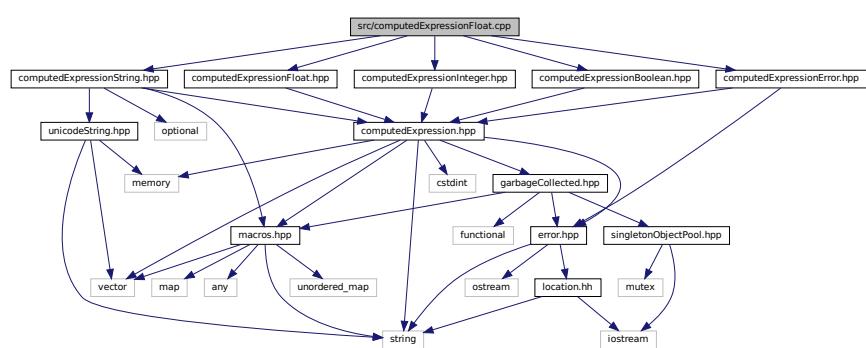


### 6.99.1 Detailed Description

Define the [Tang::ComputedExpressionFloat](#) class.

## 6.100 src/computedExpressionInteger.cpp File Reference

Define the [Tang::ComputedExpressionInteger](#) class.

```
#include "computedExpressionInteger.hpp"
#include "computedExpressionFloat.hpp"
#include "computedExpressionBoolean.hpp"
#include "computedExpressionString.hpp"
#include "computedExpressionError.hpp"
Include dependency graph for computedExpressionInteger.cpp:
```

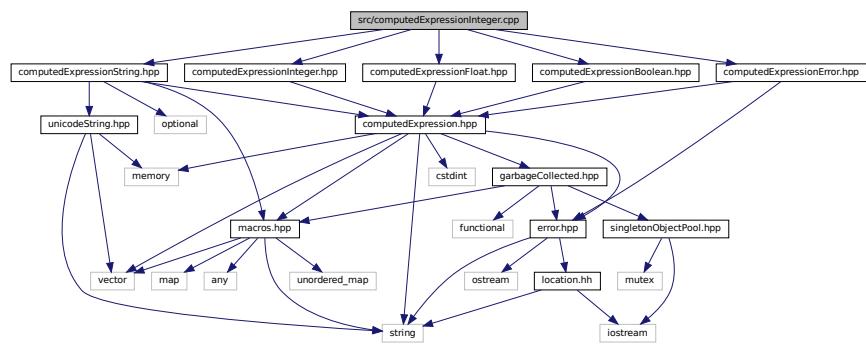

### 6.100.1 Detailed Description


Define the `Tang::ComputedExpressionInteger` class.

## 6.101 src/computedExpressionIterator.cpp File Reference

Define the `Tang::ComputedExpressionIterator` class.

```
#include <sstream>
#include "computedExpressionIterator.hpp"
#include "computedExpressionInteger.hpp"
#include "computedExpressionBoolean.hpp"
```

```
#include "computedExpressionString.hpp"
Include dependency graph for computedExpressionIterator.cpp:
```

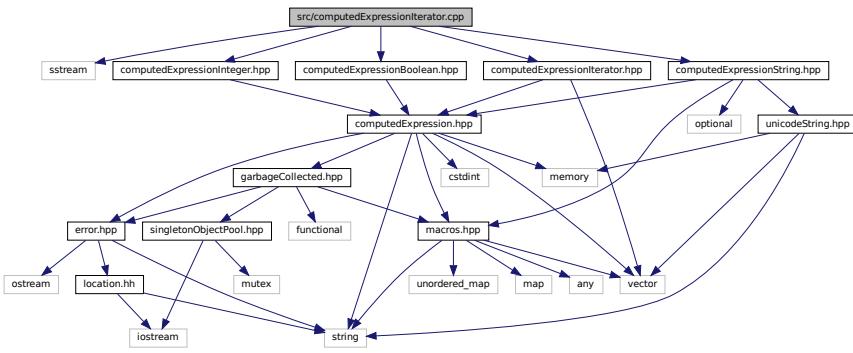

### 6.101.1 Detailed Description


Define the [Tang::ComputedExpressionIterator](#) class.

## 6.102 src/computedExpressionIteratorEnd.cpp File Reference

Define the [Tang::ComputedExpressionIteratorEnd](#) class.

```
#include "computedExpressionIteratorEnd.hpp"
#include "computedExpressionInteger.hpp"
#include "computedExpressionBoolean.hpp"
#include "computedExpressionString.hpp"
```

Include dependency graph for `computedExpressionIteratorEnd.cpp`:

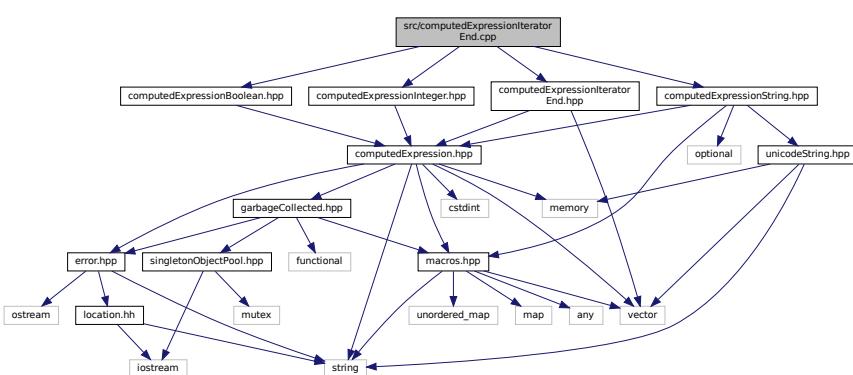


### 6.102.1 Detailed Description

Define the [Tang::ComputedExpressionIteratorEnd](#) class.

## 6.103 src/computedExpressionLibrary.cpp File Reference

Define the `Tang::ComputedExpressionLibrary` class.

```
#include <typeinfo>
#include "tangBase.hpp"
#include "computedExpressionError.hpp"
#include "computedExpressionLibrary.hpp"
#include "computedExpressionNativeLibraryFunction.hpp"
#include "computedExpressionString.hpp"
Include dependency graph for computedExpressionLibrary.cpp:
```

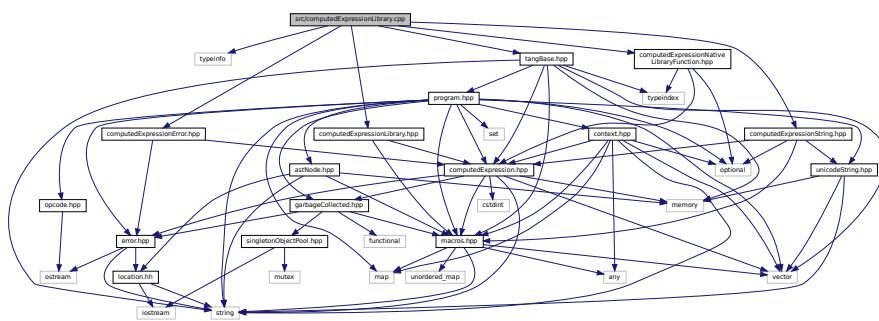


### 6.103.1 Detailed Description

Define the `Tang::ComputedExpressionLibrary` class.

## 6.104 src/computedExpressionLibraryMath.cpp File Reference

Define the Tang::ComputedExpressionLibraryMath class.

```
#include <typeinfo>
#include <cmath>
#include "tangBase.hpp"
#include "computedExpressionError.hpp"
#include "computedExpressionLibraryMath.hpp"
#include "computedExpressionNativeLibraryFunction.hpp"
#include "computedExpressionNativeFunction.hpp"
#include "computedExpressionInteger.hpp"
#include "computedExpressionFloat.hpp"
Include dependency graph for computedExpressionLibraryMath.hpp:
```

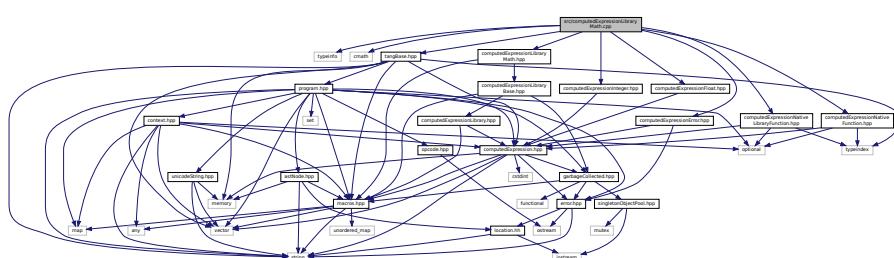


### 6.104.1 Detailed Description

Define the Tang::ComputedExpressionLibraryMath class.

## 6.105 src/computedExpressionLibraryTang.cpp File Reference

Define the Tang::ComputedExpressionLibraryTang class.

```
#include <typeinfo>
#include <cmath>
#include "tangBase.hpp"
#include "computedExpressionLibraryTang.hpp"
#include "computedExpressionString.hpp"
Include dependency graph for computedExpressionLibraryTang.cpp:
```

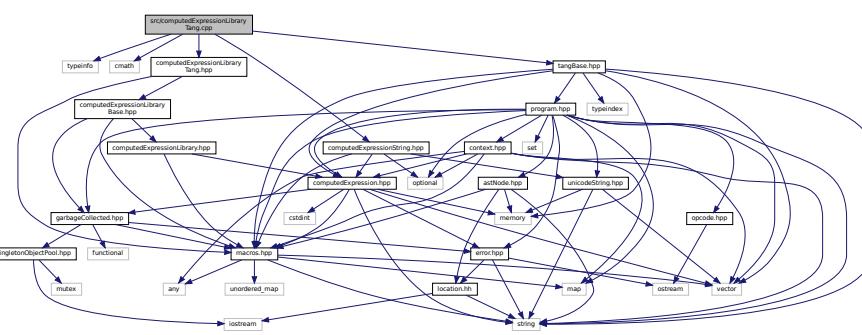


### 6.105.1 Detailed Description

Define the Tang::ComputedExpressionLibraryTang class.

## 6.106 src/computedExpressionMap.cpp File Reference

Define the [Tang::ComputedExpressionMap](#) class.

```
#include "computedExpressionMap.hpp"
#include "computedExpressionArray.hpp"
#include "computedExpressionBoolean.hpp"
#include "computedExpressionString.hpp"
#include "computedExpressionIterator.hpp"
#include "computedExpressionIteratorEnd.hpp"
#include "computedExpressionError.hpp"
Include dependency graph for computedExpressionMap.cpp:
```

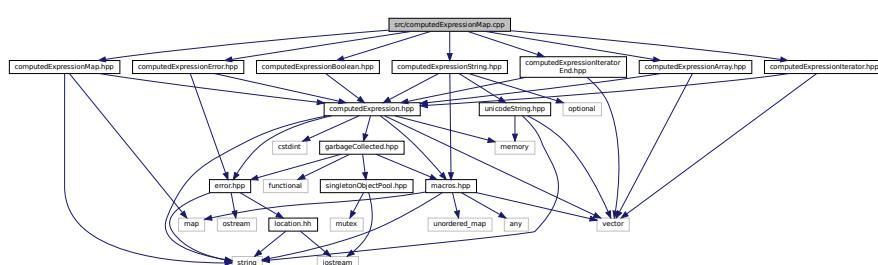


### 6.106.1 Detailed Description

Define the [Tang::ComputedExpressionMap](#) class.

## 6.107 src/computedExpressionNativeBoundFunction.cpp File Reference

Define the [Tang::ComputedExpressionNativeBoundFunction](#) class.

```
#include "computedExpressionNativeBoundFunction.hpp"
#include "computedExpressionFloat.hpp"
#include "computedExpressionBoolean.hpp"
#include "computedExpressionString.hpp"
#include "computedExpressionError.hpp"
Include dependency graph for computedExpressionNativeBoundFunction.cpp:
```

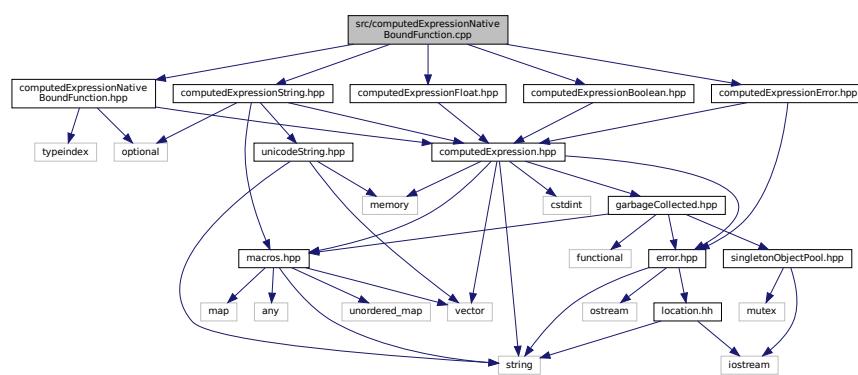

### 6.107.1 Detailed Description


Define the [Tang::ComputedExpressionNativeBoundFunction](#) class.

## 6.108 src/computedExpressionNativeFunction.cpp File Reference

Define the [Tang::ComputedExpressionNativeFunction](#) class.

```
#include "context.hpp"
#include "computedExpressionNativeFunction.hpp"
#include "computedExpressionFloat.hpp"
#include "computedExpressionBoolean.hpp"
#include "computedExpressionString.hpp"
```

```
#include "computedExpressionError.hpp"
Include dependency graph for computedExpressionNativeFunction.cpp:
```

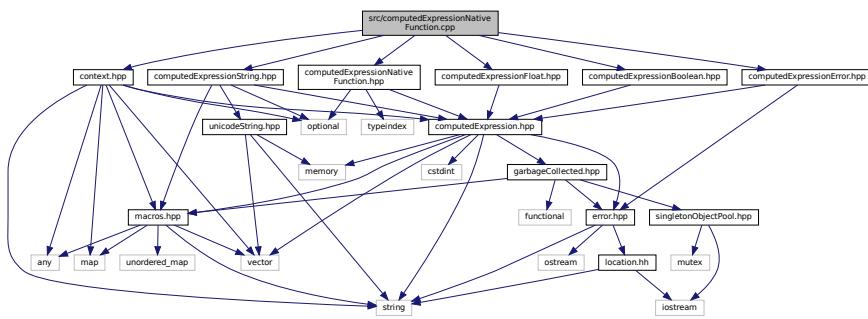


### 6.108.1 Detailed Description

Define the [Tang::ComputedExpressionNativeFunction](#) class.

## 6.109 src/computedExpressionNativeLibraryFunction.cpp File Reference

Define the [Tang::ComputedExpressionNativeLibraryFunction](#) class.

```
#include "context.hpp"
#include "computedExpressionNativeLibraryFunction.hpp"
#include "computedExpressionFloat.hpp"
#include "computedExpressionBoolean.hpp"
#include "computedExpressionString.hpp"
#include "computedExpressionError.hpp"
Include dependency graph for computedExpressionNativeLibraryFunction.cpp:
```

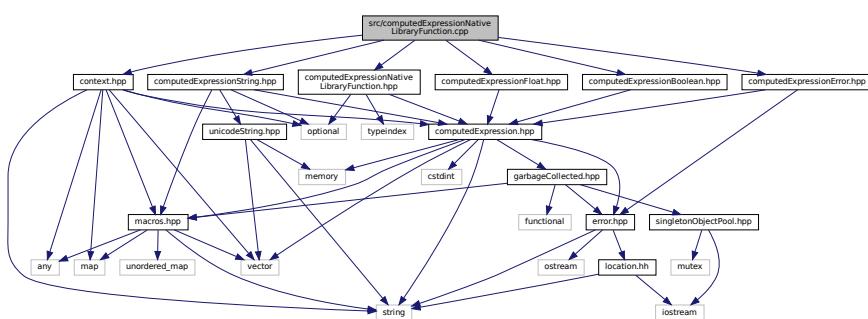

### 6.109.1 Detailed Description


Define the [Tang::ComputedExpressionNativeLibraryFunction](#) class.

## 6.110 src/computedExpressionString.cpp File Reference

Define the [Tang::ComputedExpressionString](#) class.

```
#include <algorithm>
#include "computedExpressionString.hpp"
#include "computedExpressionBoolean.hpp"
#include "computedExpressionError.hpp"
#include "computedExpressionInteger.hpp"
#include "computedExpressionIterator.hpp"
#include "computedExpressionIteratorEnd.hpp"
#include "computedExpressionIteratorEnd.hpp"
```

Include dependency graph for `computedExpressionString.cpp`:

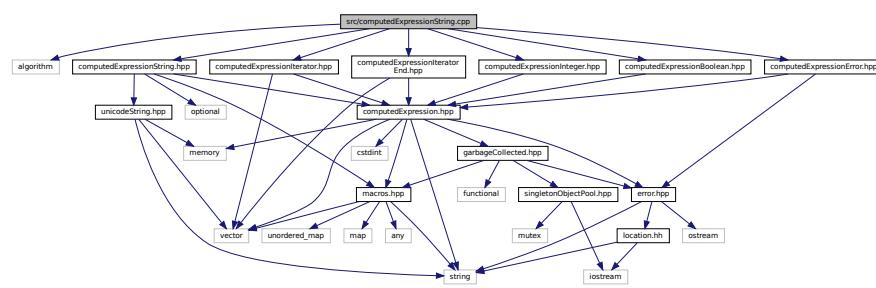

### 6.110.1 Detailed Description


Define the [Tang::ComputedExpressionString](#) class.

## 6.111 src/context.cpp File Reference

Define the [Tang::Context](#) class.

```
#include "context.hpp"
#include "program.hpp"
#include "computedExpressionString.hpp"
```

Include dependency graph for `context.cpp`:

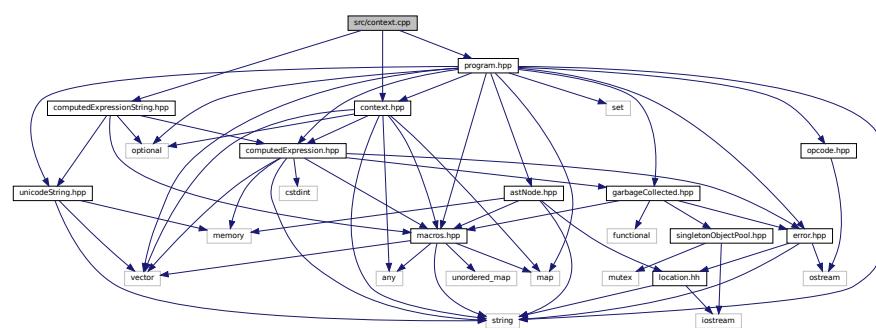

### 6.111.1 Detailed Description


Define the [Tang::Context](#) class.

## 6.112 src/error.cpp File Reference

Define the [Tang::Error](#) class.

```
#include "error.hpp"
```

Include dependency graph for error.cpp:

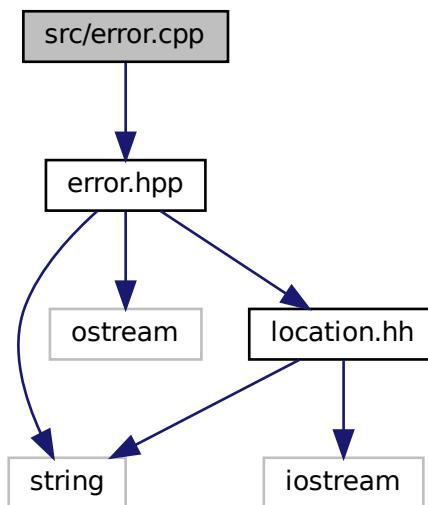

### Functions

- `std::ostream & Tang::operator<< (std::ostream &out, const Error &error)`

### 6.112.1 Detailed Description

Define the [Tang::Error](#) class.

### 6.112.2 Function Documentation

#### 6.112.2.1 operator<<()

```
std::ostream& Tang::operator<< (
    std::ostream & out,
    const Error & error )
```

## Parameters


<i>out</i>	The output stream.
<i>error</i>	The Error object.

## Returns

The output stream.

## 6.113 src/garbageCollected.cpp File Reference

```
#include "garbageCollected.hpp"
#include "computedExpressionError.hpp"
Include dependency graph for garbageCollected.cpp:
```

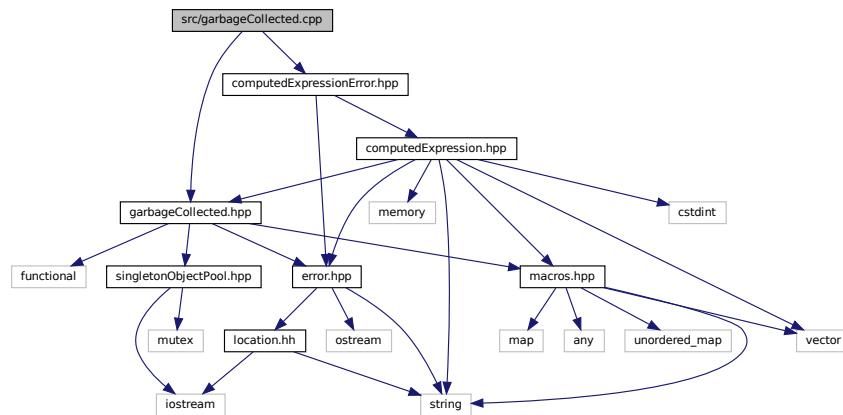

## Functions

- std::ostream & [Tang::operator<<](#) (std::ostream &out, const [GarbageCollected](#) &gc)

### 6.113.1 Function Documentation

#### 6.113.1.1 operator<<()

```
std::ostream& Tang::operator<< (
    std::ostream & out,
    const GarbageCollected & gc )
```

## Parameters

<i>out</i>	The output stream.
<i>gc</i>	The GarbageCollected value.


## Returns

The output stream.

## 6.114 src/opcode.cpp File Reference

Define the [Tang::Program::dumpBytecode](#) method.

```
#include <iostream>
#include <iomanip>
#include <bit>
#include <cmath>
#include "program.hpp"
#include "opcode.hpp"
Include dependency graph for opcode.cpp:
```

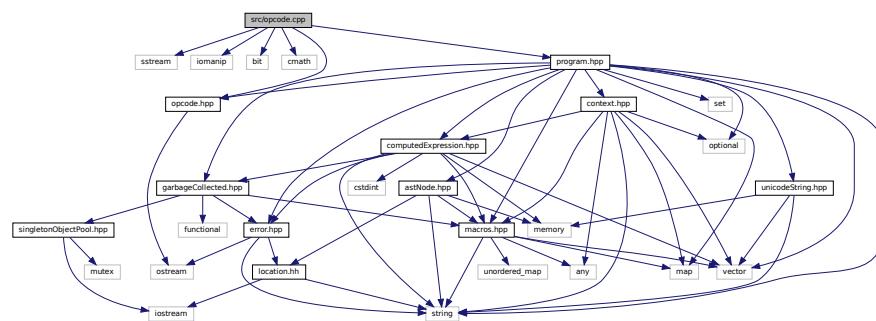

### 6.114.1 Detailed Description

Define the [Tang::Program::dumpBytecode](#) method.


## 6.115 src/program-analyze.cpp File Reference

Define the [Tang::Program::analyze](#) method.

```
#include <iostream>
#include <iomanip>
#include <bit>
#include <cmath>
#include "program.hpp"
```

```
#include "opcode.hpp"
```

Include dependency graph for program-analyze.cpp:

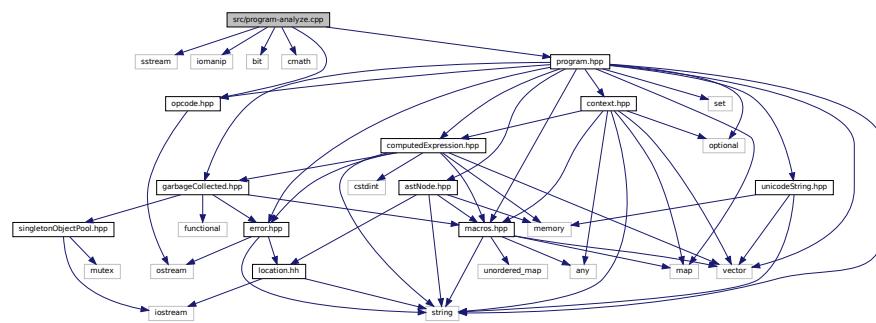

## Macros

- `#define DUMPPROGRAMCHECK(x)`

*Verify the size of the Bytecode vector so that it may be safely accessed.*

### 6.115.1 Detailed Description

Define the [Tang::Program::analyze](#) method.

### 6.115.2 Macro Definition Documentation

#### 6.115.2.1 DUMPPROGRAMCHECK

```
#define DUMPPROGRAMCHECK(
```

```
    x )
```

##### Value:

```
    if (this->bytecode.size() < (pc + (x))) \
```

```
        return {{}, {}}
```

*Verify the size of the Bytecode vector so that it may be safely accessed.*

If the vector is not large enough, an empty result is returned.


##### Parameters

<code>x</code>	The number of additional vector entries that should exist.
----------------	--

## 6.116 src/program-dumpBytecode.cpp File Reference

Define the [Tang::Program::dumpBytecode](#) method.

```
#include <sstream>
#include <iomanip>
#include <bit>
#include <cmath>
#include "program.hpp"
#include "opcode.hpp"
Include dependency graph for program-dumpBytecode.cpp:
```

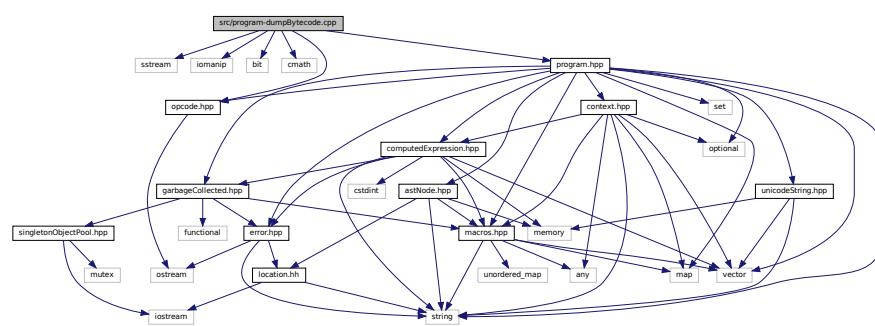

### Macros

- `#define DUMPPROGRAMCHECK(x)`  
*Verify the size of the Bytecode vector so that it may be safely accessed.*
- `#define DUMPBINARY`
- `#define DUMPBINARY_I`
- `#define DUMPBINARY_II`

#### 6.116.1 Detailed Description

Define the [Tang::Program::dumpBytecode](#) method.

#### 6.116.2 Macro Definition Documentation

##### 6.116.2.1 DUMPBINARY

```
#define DUMPBINARY
```

**Value:**

```
out << (Opcode)this->bytecode[pc]; \
++pc;
```

### 6.116.2.2 DUMPBINARIES\_I

```
#define DUMPBINARIES_I
```

**Value:**

```
DUMPPROGRAMCHECK(1); \
out << (Opcode)this->bytecode[pc] \
<< this->bytecode[pc + 1]; \
pc += 2;
```

### 6.116.2.3 DUMPBINARIES\_II

```
#define DUMPBINARIES_II
```

**Value:**

```
DUMPPROGRAMCHECK(2); \
out << (Opcode)this->bytecode[pc] \
<< this->bytecode[pc + 1] \
<< ", " \
<< this->bytecode[pc + 2]; \
pc += 3;
```

### 6.116.2.4 DUMPPROGRAMCHECK

```
#define DUMPPROGRAMCHECK(
    x )
```

**Value:**

```
if (this->bytecode.size() < (pc + (x))) \
    return out.str() + "Error: Opcode truncated\n"
```

Verify the size of the Bytecode vector so that it may be safely accessed.

If the vector is not large enough, an error message is appended to the output string and no further opcodes are printed.

**Parameters**

x	The number of additional vector entries that should exist.
---	--


## 6.117 src/program-execute.cpp File Reference

Define the [Tang::Program::execute](#) method.

```
#include <bit>
#include <cmath>
#include "program.hpp"
#include "context.hpp"
#include "opcode.hpp"
```

```
#include "computedExpressionError.hpp"
#include "computedExpressionInteger.hpp"
#include "computedExpressionFloat.hpp"
#include "computedExpressionBoolean.hpp"
#include "computedExpressionString.hpp"
#include "computedExpressionArray.hpp"
#include "computedExpressionLibrary.hpp"
#include "computedExpressionMap.hpp"
#include "computedExpressionCompiledFunction.hpp"
#include "computedExpressionNativeBoundFunction.hpp"
#include "computedExpressionNativeLibraryFunction.hpp"
#include "computedExpressionNativeFunction.hpp"
#include "computedExpressionIteratorEnd.hpp"
#include "tangBase.hpp"
```

Include dependency graph for program-execute.cpp:

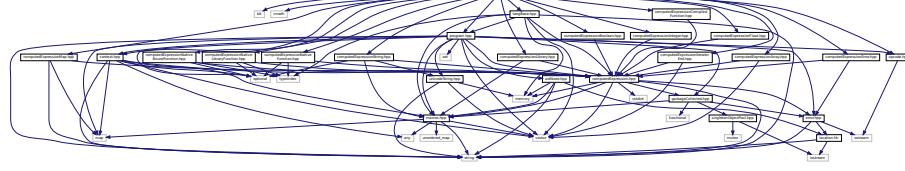

## Macros

- `#define EXECUTEPROGRAMCHECK(x)`  
*Verify the size of the Bytecode vector so that it may be safely accessed.*
- `#define STACKCHECK(x)`  
*Verify the size of the stack vector so that it may be safely accessed.*
- `#define CASTOP_S`
- `#define CASTOP_I`
- `#define UNARYOP_S`
- `#define UNARYOP_I`
- `#define BINARYOP_SS`
- `#define BINARYOP_SI`
- `#define BINARYOP_IS`
- `#define BINARYOP_II`

### 6.117.1 Detailed Description

Define the `Tang::Program::execute` method.

### 6.117.2 Macro Definition Documentation

### 6.117.2.1 **BINARYOP\_II**

```
#define BINARYOP_II
```

**Value:**

```
EXECUTEPROGRAMCHECK(2); \
auto lhsIndex = this->bytecode[pc + 1]; \
STACKCHECK(lhsIndex); \
auto & lhs = stack[fp + lhsIndex]; \
auto rhsIndex = this->bytecode[pc + 2]; \
STACKCHECK(rhsIndex); \
auto & rhs = stack[fp + rhsIndex]; \
pc += 3;
```

### 6.117.2.2 **BINARYOP\_IS**

```
#define BINARYOP_IS
```

**Value:**

```
EXECUTEPROGRAMCHECK(1); \
STACKCHECK(1); \
auto rhs = stack.back(); \
stack.pop_back(); \
auto lhsIndex = this->bytecode[pc + 1]; \
STACKCHECK(lhsIndex); \
auto & lhs = stack[fp + lhsIndex]; \
pc += 2;
```

### 6.117.2.3 **BINARYOP\_SI**

```
#define BINARYOP_SI
```

**Value:**

```
EXECUTEPROGRAMCHECK(1); \
STACKCHECK(1); \
auto rhsIndex = this->bytecode[pc + 1]; \
STACKCHECK(rhsIndex); \
auto & rhs = stack[fp + rhsIndex]; \
auto lhs = stack.back(); \
stack.pop_back(); \
pc += 2;
```

### 6.117.2.4 **BINARYOP\_SS**

```
#define BINARYOP_SS
```

**Value:**

```
STACKCHECK(2); \
auto rhs = stack.back(); \
stack.pop_back(); \
auto lhs = stack.back(); \
stack.pop_back(); \
++pc;
```

### 6.117.2.5 CASTOP\_I

```
#define CASTOP_I
```

**Value:**

```
EXECUTEPROGRAMCHECK(1); \
auto index = this->bytecode[pc + 1]; \
STACKCHECK(index); \
auto & operand = stack[fp + index]; \
pc += 2;
```

### 6.117.2.6 CASTOP\_S

```
#define CASTOP_S
```

**Value:**

```
STACKCHECK(1); \
auto operand = stack.back(); \
stack.pop_back(); \
++pc;
```

### 6.117.2.7 EXECUTEPROGRAMCHECK

```
#define EXECUTEPROGRAMCHECK( \
    x )
```

**Value:**

```
if (this->bytecode.size() < (pc + (x))) { \
    stack.push_back(GarbageCollected::make<ComputedExpressionError>(Error{"Opcode instruction \
truncated."})); \
    pc = this->bytecode.size(); \
    break; \
}
```

Verify the size of the Bytecode vector so that it may be safely accessed.

**Parameters**

x	The number of additional vector entries that should exist.
---	--

### 6.117.2.8 STACKCHECK

```
#define STACKCHECK( \
    x )
```

**Value:**

```
if (stack.size() < (fp + (x))) { \
    stack.push_back(GarbageCollected::make<ComputedExpressionError>(Error{"Insufficient stack depth."})); \
    pc = this->bytecode.size(); \
    break; \
}
```

Verify the size of the stack vector so that it may be safely accessed.

## Parameters

x	The number of entries that should exist in the stack.
---	---

**6.117.2.9 UNARYOP\_I**

```
#define UNARYOP_I
```

**Value:**

```
EXECUTEPROGRAMCHECK(1); \
auto index = this->bytecode[pc + 1]; \
STACKCHECK(index); \
auto & operand = stack[fp + index]; \
pc += 2;
```

**6.117.2.10 UNARYOP\_S**

```
#define UNARYOP_S
```


**Value:**

```
STACKCHECK(1); \
auto operand = stack.back(); \
stack.pop_back(); \
++pc;
```

**6.118 src/program-optimize.cpp File Reference**

Define the [Tang::Program::optimize](#) method.

```
#include <set>
#include "program.hpp"
#include "opcode.hpp"
Include dependency graph for program-optimize.cpp:
```

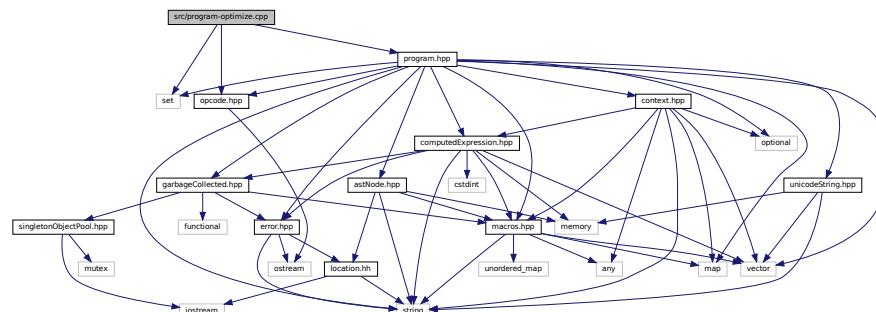

### 6.118.1 Detailed Description


Define the `Tang::Program::optimize` method.

## 6.119 src/program.cpp File Reference

Define the `Tang::Program` class.

```
#include <sstream>
#include "program.hpp"
#include "opcode.hpp"
#include "tangScanner.hpp"
#include "tangParser.hpp"
#include "astNodeString.hpp"
#include "computedExpressionString.hpp"
#include "computedExpressionError.hpp"
Include dependency graph for program.cpp:
```

Include dependency graph for program.cpp:

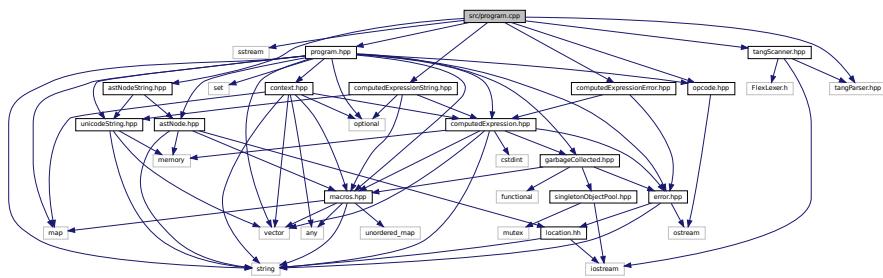

### 6.119.1 Detailed Description


Define the `Tang::Program` class.

## 6.120 src/tang.cpp File Reference

Code for the Tang command line interpreter.

```
#include <cstring>
#include <iomanip>
#include <iostream>
#include "tang.hpp"
Include dependency graph for tang.cpp:
```

Include dependency graph for tang.cpp:

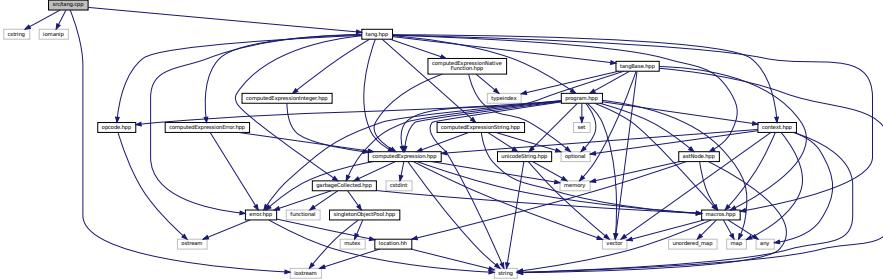

## Functions

- void **printHelpText** ()
  - int **main** (int argc, char \*argv[ ])


### **6.120.1 Detailed Description**

Code for the Tang command line interpreter.

## 6.121 src/tangBase.cpp File Reference

Define the `Tang::TangBase` class.

```
#include "tangBase.hpp"
#include "computedExpressionArray.hpp"
#include "computedExpressionString.hpp"
#include "computedExpressionError.hpp"
#include "computedExpressionLibraryMath.hpp"
#include "computedExpressionLibraryTang.hpp"
#include "context.hpp"
Include dependency graph for tangBase.cpp:
```

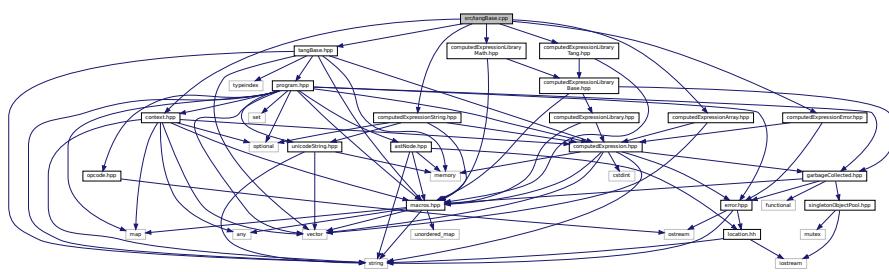

## Macros

- `#define OBJECTMETHOD(type) {type_index(typeid(type)), type::getMethods()}`
  - `#define LIBRARY(alias, type)`
  - `#define LIBRARYATTRIBUTES(type) {type_index(typeid(type)), type::getLibraryAttributes()}`

### 6.121.1 Detailed Description

Define the `Tang::TangBase` class.

## 6.121.2 Macro Definition Documentation

### 6.121.2.1 LIBRARY

```
#define LIBRARY(
    alias,
    type )
```


**Value:**

```
{alias, []([[maybe_unused]] Context & context) { \
    return GarbageCollected::make<type>(); \
}}
```

## 6.122 src/unicodeString.cpp File Reference

Contains the function declarations for the [Tang::UnicodeString](#) class and the interface to ICU.

```
#include <cassert>
#include <vector>
#include <memory>
#include <algorithm>
#include <sstream>
#include <unicode/uconfig.h>
#include <unicode/ustring.h>
#include <unicode/brkiter.h>
#include "unicodeString.hpp"
#include "unescape.hpp"
#include "htmlEscape.hpp"
#include "htmlEscapeAscii.hpp"
#include "percentEncode.hpp"
Include dependency graph for unicodeString.cpp:
```

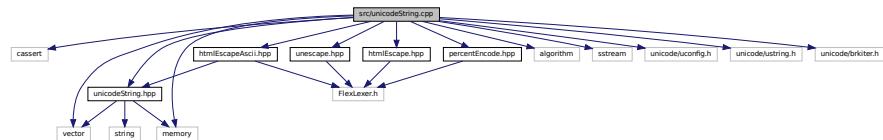

### 6.122.1 Detailed Description


Contains the function declarations for the [Tang::UnicodeString](#) class and the interface to ICU.

## 6.123 test/test.cpp File Reference

Test the general language behaviors.

```
#include <gtest/gtest.h>
#include <iostream>
```

```
#include "tang.hpp"
Include dependency graph for test.cpp:
```

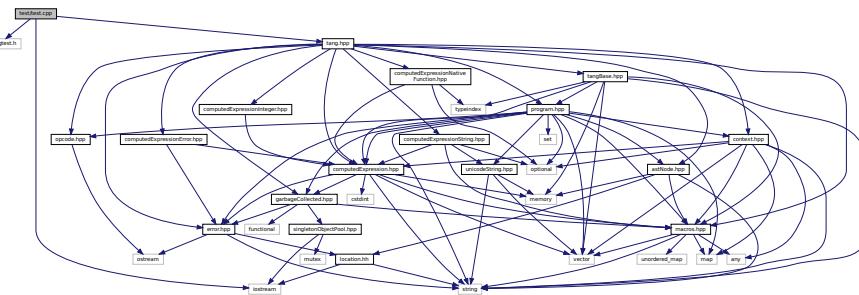

## Functions

- **TEST** (Declare, Null)
  - **TEST** (Declare, Integer)
  - **TEST** (Declare, Float)
  - **TEST** (Declare, Boolean)
  - **TEST** (Declare, String)
  - **TEST** (Expression, Add)
  - **TEST** (Expression, Subtract)
  - **TEST** (Expression, Multiplication)
  - **TEST** (Expression, Division)
  - **TEST** (Expression, Modulo)
  - **TEST** (Expression, UnaryMinus)
  - **TEST** (Expression, Parentheses)
  - **TEST** (Expression, TypeCast)
  - **TEST** (Expression, Not)
  - **TEST** (Expression, LessThan)
  - **TEST** (Expression, LessThanEqual)
  - **TEST** (Expression, GreaterThan)
  - **TEST** (Expression, GreaterThanEqual)
  - **TEST** (Expression, Equal)
  - **TEST** (Expression, NotEqual)
  - **TEST** (Expression, And)
  - **TEST** (Expression, Or)
  - **TEST** (Expression, Ternary)
  - **TEST** (Expression, StringIndex)
  - **TEST** (Expression, StringSlice)
  - **TEST** (Expression, ArrayIndex)
  - **TEST** (Expression, Map)
  - **TEST** (CodeBlock, Statements)
  - **TEST** (Assign, Identifier)
  - **TEST** (Assign, Index)
  - **TEST** (Expression, ArraySlice)
  - **TEST** (ControlFlow, IfElse)
  - **TEST** (ControlFlow, While)
  - **TEST** (ControlFlow, Break)
  - **TEST** (ControlFlow, Continue)
  - **TEST** (ControlFlow, DoWhile)
  - **TEST** (ControlFlow, For)

- **TEST** (ControlFlow, RangedFor)
- **TEST** (Print, Default)
- **TEST** (Print, Array)
- **TEST** (Syntax, SingleLineComment)
- **TEST** (Syntax, MultiLineComment)
- **TEST** (Syntax, UntrustedString)
- **TEST** (Syntax, UntrustedStringLiteral)
- **TEST** (Syntax, PercentEncodedString)
- **TEST** (NativeFunctions, General)
- **TEST** ([Context](#), General)
- **TEST** (Compile, Template)
- **TEST** (Compile, ShortCodes)
- **TEST** (Library, Use)
- **TEST** (Library, Tang)
- **TEST** (Optimization, Subtract)
- int **main** (int argc, char \*\*argv)

## Variables

- auto **tang** = TangBase::make\_shared()


### 6.123.1 Detailed Description

Test the general language behaviors.

## 6.124 test/testGarbageCollected.cpp File Reference

Test the generic behavior of the [Tang::GarbageCollected](#) class.

```
#include <gtest/gtest.h>
#include "garbageCollected.hpp"
#include "computedExpression.hpp"
#include "computedExpressionInteger.hpp"
Include dependency graph for testGarbageCollected.cpp:
```

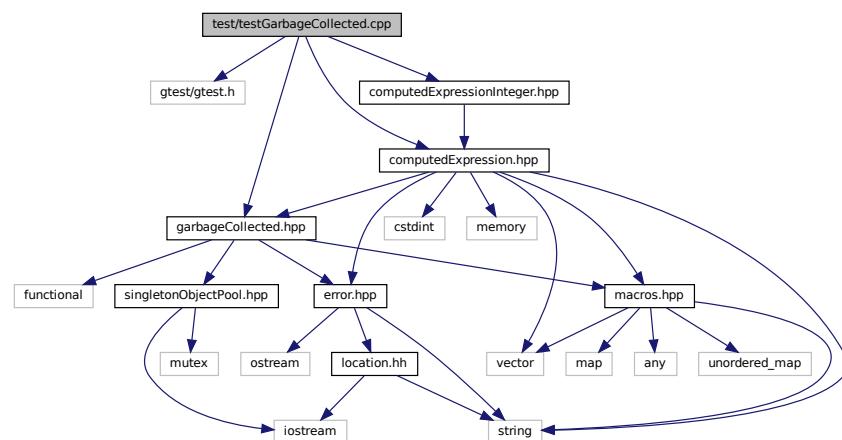

## Functions

- **TEST** (Create, Access)
- **TEST** (RuleOfFive, CopyConstructor)
- **TEST** (Recycle, ObjectIsRecycled)
- **TEST** (Recycle, ObjectIsNotRecycled)
- int **main** (int argc, char \*\*argv)


### 6.124.1 Detailed Description

Test the generic behavior of the [Tang::GarbageCollected](#) class.

## 6.125 test/testSingletonObjectPool.cpp File Reference

Test the generic behavior of the [Tang::SingletonObjectPool](#) class.

```
#include <gtest/gtest.h>
#include <cstdint>
#include <set>
#include "singletonObjectPool.hpp"
#include <iostream>
Include dependency graph for testSingletonObjectPool.cpp:
```

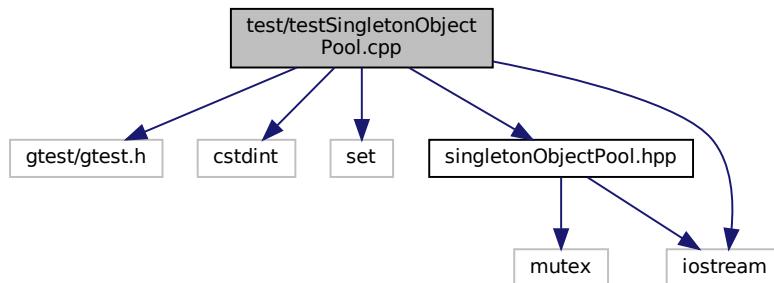

## Functions

- **TEST** (Singleton, SameForSameType)
- **TEST** (Singleton, DifferentForDifferentTypes)
- **TEST** (Get, SuccessiveCallsProduceDifferentMemoryAddresses)
- **TEST** (Recycle, RecycledObjectIsReused)
- **TEST** (Get, SuccessiveCallsAreSequential)
- **TEST** (Get, KeepsGeneratingDifferentPointers)
- **TEST** (Recycle, WorksAfterLargeNumberOfAllocations)
- int **main** (int argc, char \*\*argv)


### 6.125.1 Detailed Description

Test the generic behavior of the [Tang::SingletonObjectPool](#) class.

## 6.126 test/testUnicodeString.cpp File Reference

Contains tests for the [Tang::UnicodeString](#) class.

```
#include <gtest/gtest.h>
#include <iostream>
#include "unicodeString.hpp"
Include dependency graph for testUnicodeString.cpp:
```

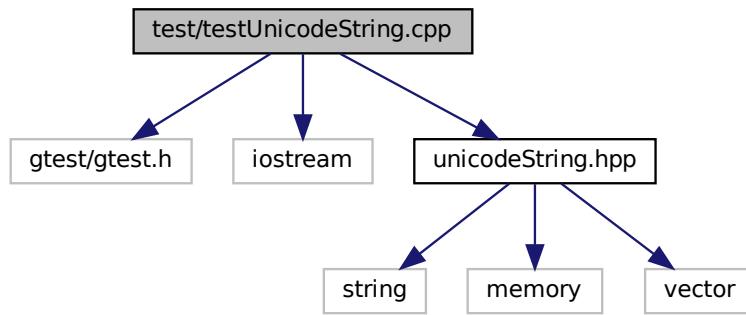

### Functions

- [TEST \(Core, Unescape\)](#)
- [TEST \(Core, HtmlEscape\)](#)
- [TEST \(Core, HtmlEscapeAscii\)](#)
- [TEST \(UnicodeString, SubString\)](#)
- [TEST \(UnicodeString, Types\)](#)
- [TEST \(Core, PercentEncode\)](#)
- int [main](#) (int argc, char \*\*argv)

### 6.126.1 Detailed Description

Contains tests for the [Tang::UnicodeString](#) class.



# Index

—add  
    Tang::ComputedExpression, 153  
    Tang::ComputedExpressionArray, 166  
    Tang::ComputedExpressionBoolean, 181  
    Tang::ComputedExpressionCompiledFunction, 194  
    Tang::ComputedExpressionError, 207  
    Tang::ComputedExpressionFloat, 220  
    Tang::ComputedExpressionInteger, 234  
    Tang::ComputedExpressionIterator, 248  
    Tang::ComputedExpressionIteratorEnd, 262  
    Tang::ComputedExpressionLibrary, 276  
    Tang::ComputedExpressionLibraryBase, 290  
    Tang::ComputedExpressionMap, 305  
    Tang::ComputedExpressionNativeBoundFunction, 319  
    Tang::ComputedExpressionNativeFunction, 334  
    Tang::ComputedExpressionNativeLibraryFunction, 349  
    Tang::ComputedExpressionString, 365

—asCode  
    Tang::ComputedExpression, 153  
    Tang::ComputedExpressionArray, 166  
    Tang::ComputedExpressionBoolean, 181  
    Tang::ComputedExpressionCompiledFunction, 194  
    Tang::ComputedExpressionError, 207  
    Tang::ComputedExpressionFloat, 220  
    Tang::ComputedExpressionInteger, 234  
    Tang::ComputedExpressionIterator, 249  
    Tang::ComputedExpressionIteratorEnd, 263  
    Tang::ComputedExpressionLibrary, 277  
    Tang::ComputedExpressionLibraryBase, 291  
    Tang::ComputedExpressionMap, 305  
    Tang::ComputedExpressionNativeBoundFunction, 320  
    Tang::ComputedExpressionNativeFunction, 335  
    Tang::ComputedExpressionNativeLibraryFunction, 350  
    Tang::ComputedExpressionString, 365

—assign\_index  
    Tang::ComputedExpression, 153  
    Tang::ComputedExpressionArray, 167  
    Tang::ComputedExpressionBoolean, 182  
    Tang::ComputedExpressionCompiledFunction, 194  
    Tang::ComputedExpressionError, 208  
    Tang::ComputedExpressionFloat, 220  
    Tang::ComputedExpressionInteger, 234  
    Tang::ComputedExpressionIterator, 249  
    Tang::ComputedExpressionIteratorEnd, 263  
    Tang::ComputedExpressionLibrary, 277

—divide  
    Tang::ComputedExpression, 154  
    Tang::ComputedExpressionArray, 168  
    Tang::ComputedExpressionBoolean, 182  
    Tang::ComputedExpressionCompiledFunction, 195  
    Tang::ComputedExpressionError, 208  
    Tang::ComputedExpressionFloat, 221  
    Tang::ComputedExpressionInteger, 235  
    Tang::ComputedExpressionIterator, 250  
    Tang::ComputedExpressionIteratorEnd, 264  
    Tang::ComputedExpressionLibrary, 278  
    Tang::ComputedExpressionLibraryBase, 292  
    Tang::ComputedExpressionMap, 306  
    Tang::ComputedExpressionNativeBoundFunction, 321  
    Tang::ComputedExpressionNativeFunction, 336  
    Tang::ComputedExpressionNativeLibraryFunction, 351  
    Tang::ComputedExpressionString, 367

—equal  
    Tang::ComputedExpression, 154  
    Tang::ComputedExpressionArray, 168

Tang::ComputedExpressionBoolean, 183  
 Tang::ComputedExpressionCompiledFunction, 196  
 Tang::ComputedExpressionError, 209  
 Tang::ComputedExpressionFloat, 222  
 Tang::ComputedExpressionInteger, 236  
 Tang::ComputedExpressionIterator, 250  
 Tang::ComputedExpressionIteratorEnd, 264  
 Tang::ComputedExpressionLibrary, 278  
 Tang::ComputedExpressionLibraryBase, 292  
 Tang::ComputedExpressionMap, 307  
 Tang::ComputedExpressionNativeBoundFunction, 321  
 Tang::ComputedExpressionNativeFunction, 336  
 Tang::ComputedExpressionNativeLibraryFunction, 351  
 Tang::ComputedExpressionString, 367  
float  
     Tang::ComputedExpression, 155  
     Tang::ComputedExpressionArray, 169  
     Tang::ComputedExpressionBoolean, 183  
     Tang::ComputedExpressionCompiledFunction, 196  
     Tang::ComputedExpressionError, 209  
     Tang::ComputedExpressionFloat, 222  
     Tang::ComputedExpressionInteger, 236  
     Tang::ComputedExpressionIterator, 251  
     Tang::ComputedExpressionIteratorEnd, 265  
     Tang::ComputedExpressionLibrary, 279  
     Tang::ComputedExpressionLibraryBase, 293  
     Tang::ComputedExpressionMap, 307  
     Tang::ComputedExpressionNativeBoundFunction, 322  
     Tang::ComputedExpressionNativeFunction, 337  
     Tang::ComputedExpressionNativeLibraryFunction, 352  
     Tang::ComputedExpressionString, 368  
getIterator  
     Tang::ComputedExpression, 155  
     Tang::ComputedExpressionArray, 169  
     Tang::ComputedExpressionBoolean, 183  
     Tang::ComputedExpressionCompiledFunction, 196  
     Tang::ComputedExpressionError, 209  
     Tang::ComputedExpressionFloat, 223  
     Tang::ComputedExpressionInteger, 237  
     Tang::ComputedExpressionIterator, 251  
     Tang::ComputedExpressionIteratorEnd, 265  
     Tang::ComputedExpressionLibrary, 279  
     Tang::ComputedExpressionLibraryBase, 293  
     Tang::ComputedExpressionMap, 307  
     Tang::ComputedExpressionNativeBoundFunction, 322  
     Tang::ComputedExpressionNativeFunction, 337  
     Tang::ComputedExpressionNativeLibraryFunction, 352  
     Tang::ComputedExpressionString, 368  
index  
     Tang::ComputedExpression, 155  
     Tang::ComputedExpressionArray, 169  
     Tang::ComputedExpressionBoolean, 184  
 Tang::ComputedExpressionCompiledFunction, 197  
 Tang::ComputedExpressionError, 210  
 Tang::ComputedExpressionFloat, 223  
 Tang::ComputedExpressionInteger, 237  
 Tang::ComputedExpressionIterator, 251  
 Tang::ComputedExpressionIteratorEnd, 265  
 Tang::ComputedExpressionLibrary, 279  
 Tang::ComputedExpressionLibraryBase, 293  
 Tang::ComputedExpressionMap, 308  
 Tang::ComputedExpressionNativeBoundFunction, 322  
 Tang::ComputedExpressionNativeFunction, 338  
 Tang::ComputedExpressionNativeLibraryFunction, 352  
 Tang::ComputedExpressionString, 369  
integer  
     Tang::ComputedExpression, 156  
     Tang::ComputedExpressionArray, 170  
     Tang::ComputedExpressionBoolean, 184  
     Tang::ComputedExpressionCompiledFunction, 197  
     Tang::ComputedExpressionError, 210  
     Tang::ComputedExpressionFloat, 223  
     Tang::ComputedExpressionInteger, 237  
     Tang::ComputedExpressionIterator, 252  
     Tang::ComputedExpressionIteratorEnd, 266  
     Tang::ComputedExpressionLibrary, 280  
     Tang::ComputedExpressionLibraryBase, 294  
     Tang::ComputedExpressionMap, 308  
     Tang::ComputedExpressionNativeBoundFunction, 323  
     Tang::ComputedExpressionNativeFunction, 338  
     Tang::ComputedExpressionNativeLibraryFunction, 353  
     Tang::ComputedExpressionString, 369  
iteratorNext  
     Tang::ComputedExpression, 156  
     Tang::ComputedExpressionArray, 170  
     Tang::ComputedExpressionBoolean, 184  
     Tang::ComputedExpressionCompiledFunction, 197  
     Tang::ComputedExpressionError, 210  
     Tang::ComputedExpressionFloat, 223  
     Tang::ComputedExpressionInteger, 237  
     Tang::ComputedExpressionIterator, 252  
     Tang::ComputedExpressionIteratorEnd, 266  
     Tang::ComputedExpressionLibrary, 280  
     Tang::ComputedExpressionLibraryBase, 294  
     Tang::ComputedExpressionMap, 308  
     Tang::ComputedExpressionNativeBoundFunction, 323  
     Tang::ComputedExpressionNativeFunction, 338  
     Tang::ComputedExpressionNativeLibraryFunction, 353  
     Tang::ComputedExpressionString, 369  
lessThan  
     Tang::ComputedExpression, 156  
     Tang::ComputedExpressionArray, 170  
     Tang::ComputedExpressionBoolean, 185  
     Tang::ComputedExpressionCompiledFunction, 198

Tang::ComputedExpressionError, 211  
Tang::ComputedExpressionFloat, 224  
Tang::ComputedExpressionInteger, 238  
Tang::ComputedExpressionIterator, 252  
Tang::ComputedExpressionIteratorEnd, 266  
Tang::ComputedExpressionLibrary, 280  
Tang::ComputedExpressionLibraryBase, 294  
Tang::ComputedExpressionMap, 309  
Tang::ComputedExpressionNativeBoundFunction, 323  
Tang::ComputedExpressionNativeFunction, 339  
Tang::ComputedExpressionNativeLibraryFunction, 353  
Tang::ComputedExpressionString, 370  
\_modulo  
Tang::ComputedExpression, 157  
Tang::ComputedExpressionArray, 171  
Tang::ComputedExpressionBoolean, 185  
Tang::ComputedExpressionCompiledFunction, 198  
Tang::ComputedExpressionError, 211  
Tang::ComputedExpressionFloat, 224  
Tang::ComputedExpressionInteger, 238  
Tang::ComputedExpressionIterator, 253  
Tang::ComputedExpressionIteratorEnd, 267  
Tang::ComputedExpressionLibrary, 281  
Tang::ComputedExpressionLibraryBase, 295  
Tang::ComputedExpressionMap, 309  
Tang::ComputedExpressionNativeBoundFunction, 325  
Tang::ComputedExpressionNativeFunction, 339  
Tang::ComputedExpressionNativeLibraryFunction, 355  
Tang::ComputedExpressionString, 371  
\_multiply  
Tang::ComputedExpression, 157  
Tang::ComputedExpressionArray, 171  
Tang::ComputedExpressionBoolean, 185  
Tang::ComputedExpressionCompiledFunction, 198  
Tang::ComputedExpressionError, 211  
Tang::ComputedExpressionFloat, 225  
Tang::ComputedExpressionInteger, 239  
Tang::ComputedExpressionIterator, 253  
Tang::ComputedExpressionIteratorEnd, 267  
Tang::ComputedExpressionLibrary, 281  
Tang::ComputedExpressionLibraryBase, 295  
Tang::ComputedExpressionMap, 310  
Tang::ComputedExpressionNativeBoundFunction, 325  
Tang::ComputedExpressionNativeFunction, 339  
Tang::ComputedExpressionNativeLibraryFunction, 355  
Tang::ComputedExpressionString, 371  
\_negative  
Tang::ComputedExpression, 158  
Tang::ComputedExpressionArray, 172  
Tang::ComputedExpressionBoolean, 186  
Tang::ComputedExpressionCompiledFunction, 199  
Tang::ComputedExpressionError, 212  
Tang::ComputedExpressionFloat, 225  
Tang::ComputedExpressionInteger, 239  
Tang::ComputedExpressionIterator, 254  
Tang::ComputedExpressionIteratorEnd, 268  
Tang::ComputedExpressionLibrary, 281  
Tang::ComputedExpressionLibraryBase, 295  
Tang::ComputedExpressionMap, 310  
Tang::ComputedExpressionNativeBoundFunction, 325  
Tang::ComputedExpressionNativeFunction, 339  
Tang::ComputedExpressionNativeLibraryFunction, 355  
Tang::ComputedExpressionString, 371  
\_not  
Tang::ComputedExpression, 158  
Tang::ComputedExpressionArray, 172  
Tang::ComputedExpressionBoolean, 186  
Tang::ComputedExpressionCompiledFunction, 199  
Tang::ComputedExpressionError, 212  
Tang::ComputedExpressionFloat, 225  
Tang::ComputedExpressionInteger, 240  
Tang::ComputedExpressionIterator, 254  
Tang::ComputedExpressionIteratorEnd, 268  
Tang::ComputedExpressionLibrary, 282  
Tang::ComputedExpressionLibraryBase, 296  
Tang::ComputedExpressionMap, 310  
Tang::ComputedExpressionNativeBoundFunction, 326  
Tang::ComputedExpressionNativeFunction, 340  
Tang::ComputedExpressionNativeLibraryFunction, 356  
Tang::ComputedExpressionString, 372  
\_period  
Tang::ComputedExpression, 158  
Tang::ComputedExpressionArray, 172  
Tang::ComputedExpressionBoolean, 186  
Tang::ComputedExpressionCompiledFunction, 199  
Tang::ComputedExpressionError, 212  
Tang::ComputedExpressionFloat, 226  
Tang::ComputedExpressionInteger, 240  
Tang::ComputedExpressionIterator, 254  
Tang::ComputedExpressionIteratorEnd, 268  
Tang::ComputedExpressionLibrary, 282  
Tang::ComputedExpressionLibraryBase, 296  
Tang::ComputedExpressionMap, 310  
Tang::ComputedExpressionNativeBoundFunction, 326  
Tang::ComputedExpressionNativeFunction, 340  
Tang::ComputedExpressionNativeLibraryFunction, 356  
Tang::ComputedExpressionString, 372  
\_slice  
Tang::ComputedExpression, 159  
Tang::ComputedExpressionArray, 173  
Tang::ComputedExpressionBoolean, 187  
Tang::ComputedExpressionCompiledFunction, 200  
Tang::ComputedExpressionError, 213  
Tang::ComputedExpressionFloat, 226

Tang::ComputedExpressionInteger, 240  
 Tang::ComputedExpressionIterator, 255  
 Tang::ComputedExpressionIteratorEnd, 268  
 Tang::ComputedExpressionLibrary, 282  
 Tang::ComputedExpressionLibraryBase, 296  
 Tang::ComputedExpressionMap, 311  
 Tang::ComputedExpressionNativeBoundFunction, 326  
 Tang::ComputedExpressionNativeFunction, 341  
 Tang::ComputedExpressionNativeLibraryFunction, 356  
 Tang::ComputedExpressionString, 373  
string  
     Tang::ComputedExpression, 159  
     Tang::ComputedExpressionArray, 173  
     Tang::ComputedExpressionBoolean, 187  
     Tang::ComputedExpressionCompiledFunction, 200  
     Tang::ComputedExpressionError, 213  
     Tang::ComputedExpressionFloat, 227  
     Tang::ComputedExpressionInteger, 241  
     Tang::ComputedExpressionIterator, 255  
     Tang::ComputedExpressionIteratorEnd, 269  
     Tang::ComputedExpressionLibrary, 283  
     Tang::ComputedExpressionLibraryBase, 297  
     Tang::ComputedExpressionMap, 311  
     Tang::ComputedExpressionNativeBoundFunction, 327  
     Tang::ComputedExpressionNativeFunction, 341  
     Tang::ComputedExpressionNativeLibraryFunction, 357  
     Tang::ComputedExpressionString, 374  
subtract  
     Tang::ComputedExpression, 159  
     Tang::ComputedExpressionArray, 174  
     Tang::ComputedExpressionBoolean, 187  
     Tang::ComputedExpressionCompiledFunction, 200  
     Tang::ComputedExpressionError, 213  
     Tang::ComputedExpressionFloat, 227  
     Tang::ComputedExpressionInteger, 241  
     Tang::ComputedExpressionIterator, 255  
     Tang::ComputedExpressionIteratorEnd, 269  
     Tang::ComputedExpressionLibrary, 283  
     Tang::ComputedExpressionLibraryBase, 297  
     Tang::ComputedExpressionMap, 312  
     Tang::ComputedExpressionNativeBoundFunction, 327  
     Tang::ComputedExpressionNativeFunction, 341  
     Tang::ComputedExpressionNativeLibraryFunction, 357  
     Tang::ComputedExpressionString, 374  
~GarbageCollected  
     Tang::GarbageCollected, 386  
Add  
     Tang::AstNodeBinary, 32  
 ADD\_II  
     opcode.hpp, 497  
 ADD\_IS  
     opcode.hpp, 497  
 ADD\_SI  
     opcode.hpp, 497  
 ADD\_SS  
     opcode.hpp, 497  
 addBreak  
     Tang::Program, 412  
 addBytecode  
     Tang::Program, 413  
 addContinue  
     Tang::Program, 413  
 addIdentifier  
     Tang::Program, 413  
 addIdentifierAssigned  
     Tang::Program, 413  
 addLibraryAlias  
     Tang::Program, 414  
 addString  
     Tang::Program, 414  
 And  
     Tang::AstNodeBinary, 32  
 append  
     Tang::ComputedExpressionArray, 174  
 ARRAY  
     opcode.hpp, 497  
 ASSIGNINDEX  
     opcode.hpp, 497  
 AstNode  
     Tang::AstNode, 18  
 AstNodeArray  
     Tang::AstNodeArray, 23  
 AstNodeAssign  
     Tang::AstNodeAssign, 27  
 AstNodeBinary  
     Tang::AstNodeBinary, 33  
 AstNodeBlock  
     Tang::AstNodeBlock, 37  
 AstNodeBoolean  
     Tang::AstNodeBoolean, 41  
 AstNodeBreak  
     Tang::AstNodeBreak, 45  
 AstNodeCast  
     Tang::AstNodeCast, 50  
 astNodeCast.cpp  
     CASTOP, 515  
 AstNodeContinue  
     Tang::AstNodeContinue, 53  
 AstNodeDoWhile  
     Tang::AstNodeDoWhile, 58  
 AstNodeFloat  
     Tang::AstNodeFloat, 62  
 AstNodeFor  
     Tang::AstNodeFor, 67  
 AstNodeFunctionCall  
     Tang::AstNodeFunctionCall, 71  
 AstNodeFunctionDeclaration  
     Tang::AstNodeFunctionDeclaration, 74  
 AstNodeIdentifier  
     Tang::AstNodeIdentifier, 79

AstNodeIfElse  
    Tang::AstNodeIfElse, 84

AstNodeIndex  
    Tang::AstNodeIndex, 88

AstNodeInteger  
    Tang::AstNodeInteger, 93

AstNodeLibrary  
    Tang::AstNodeLibrary, 97

AstNodeMap  
    Tang::AstNodeMap, 101

AstNodePeriod  
    Tang::AstNodePeriod, 105

AstNodePrint  
    Tang::AstNodePrint, 110

AstNodeRangedFor  
    Tang::AstNodeRangedFor, 114

AstNodeReturn  
    Tang::AstNodeReturn, 118

AstNodeSlice  
    Tang::AstNodeSlice, 123

AstNodeString  
    Tang::AstNodeString, 127, 128

AstNodeTernary  
    Tang::AstNodeTernary, 133

AstNodeUnary  
    Tang::AstNodeUnary, 138

astNodeUnary.cpp  
    UNARYOP, 526

AstNodeUse  
    Tang::AstNodeUse, 143

AstNodeWhile  
    Tang::AstNodeWhile, 148

BINARYOP\_II  
    program-execute.cpp, 545

BINARYOP\_IS  
    program-execute.cpp, 546

BINARYOP\_SI  
    program-execute.cpp, 546

BINARYOP\_SS  
    program-execute.cpp, 546

BOOLEAN  
    opcode.hpp, 497

Boolean  
    Tang::AstNodeCast, 50

build/generated/location.hh, 441

bytesLength  
    Tang::ComputedExpressionString, 374

    Tang::UnicodeString, 435

CALLFUNC  
    opcode.hpp, 498

CALLFUNC\_I  
    opcode.hpp, 498

CASTBOOLEAN\_I  
    opcode.hpp, 498

CASTBOOLEAN\_S  
    opcode.hpp, 498

CASTFLOAT\_I  
    opcode.hpp, 498

CASTFLOAT\_S  
    opcode.hpp, 498

CASTINTEGER\_I  
    opcode.hpp, 498

CASTINTEGER\_S  
    opcode.hpp, 498

CASTTOP  
    astNodeCast.cpp, 515

CASTTOP\_I  
    program-execute.cpp, 546

CASTTOP\_S  
    program-execute.cpp, 547

CASTSTRING\_I  
    opcode.hpp, 498

CASTSTRING\_S  
    opcode.hpp, 498

CodeType  
    Tang::Program, 411

compile  
    Tang::AstNode, 19

    Tang::AstNodeArray, 24

    Tang::AstNodeAssign, 28

    Tang::AstNodeBinary, 33

    Tang::AstNodeBlock, 38

    Tang::AstNodeBoolean, 42

    Tang::AstNodeBreak, 45

    Tang::AstNodeCast, 50

    Tang::AstNodeContinue, 54

    Tang::AstNodeDoWhile, 59

    Tang::AstNodeFloat, 63

    Tang::AstNodeFor, 67

    Tang::AstNodeFunctionCall, 71

    Tang::AstNodeFunctionDeclaration, 75

    Tang::AstNodeIdentifier, 79

    Tang::AstNodeIfElse, 84

    Tang::AstNodeIndex, 89

    Tang::AstNodeInteger, 94

    Tang::AstNodeLibrary, 98

    Tang::AstNodeMap, 101

    Tang::AstNodePeriod, 106

    Tang::AstNodePrint, 110

    Tang::AstNodeRangedFor, 114

    Tang::AstNodeReturn, 119

    Tang::AstNodeSlice, 123

    Tang::AstNodeString, 128

    Tang::AstNodeTernary, 134

    Tang::AstNodeUnary, 138

    Tang::AstNodeUse, 144

    Tang::AstNodeWhile, 149

compileLiteral  
    Tang::AstNodeString, 129

compilePreprocess  
    Tang::AstNode, 19

    Tang::AstNodeArray, 24

    Tang::AstNodeAssign, 28

    Tang::AstNodeBinary, 34

    Tang::AstNodeBlock, 38

Tang::AstNodeBoolean, 42  
 Tang::AstNodeBreak, 46  
 Tang::AstNodeCast, 50  
 Tang::AstNodeContinue, 54  
 Tang::AstNodeDoWhile, 59  
 Tang::AstNodeFloat, 63  
 Tang::AstNodeFor, 68  
 Tang::AstNodeFunctionCall, 72  
 Tang::AstNodeFunctionDeclaration, 75  
 Tang::AstNodeIdentifier, 80  
 Tang::AstNodeIfElse, 85  
 Tang::AstNodeIndex, 89  
 Tang::AstNodeInteger, 94  
 Tang::AstNodeLibrary, 98  
 Tang::AstNodeMap, 102  
 Tang::AstNodePeriod, 106  
 Tang::AstNodePrint, 111  
 Tang::AstNodeRangedFor, 115  
 Tang::AstNodeReturn, 119  
 Tang::AstNodeSlice, 124  
 Tang::AstNodeString, 129  
 Tang::AstNodeTernary, 134  
 Tang::AstNodeUnary, 140  
 Tang::AstNodeUse, 144  
 Tang::AstNodeWhile, 149  
 compileScript  
     Tang::TangBase, 425, 426  
 compileTemplate  
     Tang::TangBase, 426  
 ComputedExpressionArray  
     Tang::ComputedExpressionArray, 166  
 ComputedExpressionBoolean  
     Tang::ComputedExpressionBoolean, 181  
 ComputedExpressionCompiledFunction  
     Tang::ComputedExpressionCompiledFunction, 193  
 ComputedExpressionError  
     Tang::ComputedExpressionError, 207  
 ComputedExpressionFloat  
     Tang::ComputedExpressionFloat, 219  
 ComputedExpressionInteger  
     Tang::ComputedExpressionInteger, 233  
 ComputedExpressionIterator  
     Tang::ComputedExpressionIterator, 248  
 ComputedExpressionMap  
     Tang::ComputedExpressionMap, 305  
 ComputedExpressionNativeBoundFunction  
     Tang::ComputedExpressionNativeBoundFunction, 318  
 ComputedExpressionNativeFunction  
     Tang::ComputedExpressionNativeFunction, 334  
 ComputedExpressionNativeLibraryFunction  
     Tang::ComputedExpressionNativeLibraryFunction, 349  
 ComputedExpressionString  
     Tang::ComputedExpressionString, 364  
 COPY  
     opcode.hpp, 496  
 currentIndex  
     Tang::SingletonObjectPool< T >, 423  
 currentRecycledIndex  
     Tang::SingletonObjectPool< T >, 423  
 Default  
     Tang::AstNode, 18  
     Tang::AstNodeArray, 23  
     Tang::AstNodeAssign, 27  
     Tang::AstNodeBinary, 33  
     Tang::AstNodeBlock, 37  
     Tang::AstNodeBoolean, 41  
     Tang::AstNodeBreak, 45  
     Tang::AstNodeCast, 49  
     Tang::AstNodeContinue, 53  
     Tang::AstNodeDoWhile, 58  
     Tang::AstNodeFloat, 62  
     Tang::AstNodeFor, 66  
     Tang::AstNodeFunctionCall, 70  
     Tang::AstNodeFunctionDeclaration, 74  
     Tang::AstNodeIdentifier, 78  
     Tang::AstNodeIfElse, 83  
     Tang::AstNodeIndex, 88  
     Tang::AstNodeInteger, 93  
     Tang::AstNodeLibrary, 97  
     Tang::AstNodeMap, 101  
     Tang::AstNodePeriod, 105  
     Tang::AstNodePrint, 110  
     Tang::AstNodeRangedFor, 113  
     Tang::AstNodeReturn, 118  
     Tang::AstNodeSlice, 122  
     Tang::AstNodeString, 127  
     Tang::AstNodeTernary, 133  
     Tang::AstNodeUnary, 138  
     Tang::AstNodeUse, 143  
     Tang::AstNodeWhile, 148  
 Divide  
     Tang::AstNodeBinary, 32  
 DIVIDE\_II  
     opcode.hpp, 497  
 DIVIDE\_IS  
     opcode.hpp, 497  
 DIVIDE\_SI  
     opcode.hpp, 497  
 DIVIDE\_SS  
     opcode.hpp, 497  
 dump  
     Tang::AstNode, 20  
     Tang::AstNodeArray, 25  
     Tang::AstNodeAssign, 29  
     Tang::AstNodeBinary, 34  
     Tang::AstNodeBlock, 39  
     Tang::AstNodeBoolean, 43  
     Tang::AstNodeBreak, 47  
     Tang::AstNodeCast, 51  
     Tang::AstNodeContinue, 55  
     Tang::AstNodeDoWhile, 60  
     Tang::AstNodeFloat, 64  
     Tang::AstNodeFor, 68  
     Tang::AstNodeFunctionCall, 72

Tang::AstNodeFunctionDeclaration, 76  
Tang::AstNodeIdentifier, 80  
Tang::AstNodeIfElse, 85  
Tang::AstNodeIndex, 90  
Tang::AstNodeInteger, 95  
Tang::AstNodeLibrary, 99  
Tang::AstNodeMap, 103  
Tang::AstNodePeriod, 107  
Tang::AstNodePrint, 111  
Tang::AstNodeRangedFor, 116  
Tang::AstNodeReturn, 120  
Tang::AstNodeSlice, 124  
Tang::AstNodeString, 130  
Tang::AstNodeTernary, 135  
Tang::AstNodeUnary, 140  
Tang::AstNodeUse, 145  
Tang::AstNodeWhile, 150  
Tang::ComputedExpression, 160  
Tang::ComputedExpressionArray, 175  
Tang::ComputedExpressionBoolean, 188  
Tang::ComputedExpressionCompiledFunction, 201  
Tang::ComputedExpressionError, 214  
Tang::ComputedExpressionFloat, 228  
Tang::ComputedExpressionInteger, 242  
Tang::ComputedExpressionIterator, 256  
Tang::ComputedExpressionIteratorEnd, 270  
Tang::ComputedExpressionLibrary, 284  
Tang::ComputedExpressionLibraryBase, 298  
Tang::ComputedExpressionMap, 312  
Tang::ComputedExpressionNativeBoundFunction, 328  
Tang::ComputedExpressionNativeFunction, 342  
Tang::ComputedExpressionNativeLibraryFunction, 358  
Tang::ComputedExpressionString, 374  
DUMPBINAR Y  
program-dumpBytecode.cpp, 543  
DUMPBINAR Y\_I  
program-dumpBytecode.cpp, 543  
DUMPBINAR Y\_II  
program-dumpBytecode.cpp, 544  
dumpBytecode  
Tang::Program, 414  
DUMPPROGRAMCHECK  
program-analyze.cpp, 542  
program-dumpBytecode.cpp, 544  
EQ\_II  
opcode.hpp, 498  
EQ\_IS  
opcode.hpp, 498  
EQ\_SI  
opcode.hpp, 498  
EQ\_SS  
opcode.hpp, 498  
Equal  
Tang::AstNodeBinary, 32  
Error  
Tang::Error, 382  
error.cpp  
operator<<, 539  
execute  
Tang::Program, 415  
EXECUTEPROGRAMCHECK  
program-execute.cpp, 547  
FLOAT  
opcode.hpp, 496  
Float  
Tang::AstNodeCast, 50  
FUNCTION  
opcode.hpp, 497  
functionsDeclared  
Tang::Program, 420  
GarbageCollected  
Tang::GarbageCollected, 385, 386  
garbageCollected.cpp  
operator<<, 540  
get  
Tang::SingletonObjectPool< T >, 422  
get\_next\_token  
Tang::HtmlEscape, 401  
Tang::HtmlEscapeAscii, 403  
Tang::PercentEncode, 406  
Tang::TangScanner, 430  
Tang::Unescape, 432  
getAnnotations  
Tang::Program, 416  
getArgc  
Tang::ComputedExpressionNativeBoundFunction, 328  
Tang::ComputedExpressionNativeFunction, 342  
getAst  
Tang::Program, 416  
getBytecode  
Tang::Program, 416  
getCode  
Tang::Program, 416  
getCollection  
Tang::AstNodeIndex, 90  
getContents  
Tang::ComputedExpressionArray, 175  
getFunction  
Tang::ComputedExpressionNativeBoundFunction, 328  
Tang::ComputedExpressionNativeFunction, 342  
Tang::ComputedExpressionNativeLibraryFunction, 358  
getIdentifiers  
Tang::Program, 416  
getIdentifiersAssigned  
Tang::Program, 417  
getIndex  
Tang::AstNodeIndex, 90  
getInstance  
Tang::SingletonObjectPool< T >, 422  
GETITERATOR

opcode.hpp, 498  
 getLibraryAliases  
     Tang::Program, 417  
 getMethods  
     Tang::ComputedExpressionArray, 175  
     Tang::ComputedExpressionString, 375  
 getResult  
     Tang::Program, 417  
 getStrings  
     Tang::Program, 417  
 getTargetTypeIndex  
     Tang::ComputedExpressionNativeBoundFunction, 328  
 getValue  
     Tang::ComputedExpressionFloat, 228  
     Tang::ComputedExpressionInteger, 242  
     Tang::ComputedExpressionString, 375  
 GreaterThan  
     Tang::AstNodeBinary, 32  
 GreaterThanEqual  
     Tang::AstNodeBinary, 32  
 GT\_II  
     opcode.hpp, 497  
 GT\_IS  
     opcode.hpp, 497  
 GT\_SI  
     opcode.hpp, 497  
 GT\_SS  
     opcode.hpp, 497  
 GTE\_II  
     opcode.hpp, 498  
 GTE\_IS  
     opcode.hpp, 497  
 GTE\_SI  
     opcode.hpp, 497  
 GTE\_SS  
     opcode.hpp, 497  
 HtmlEscape  
     Tang::HtmlEscape, 400  
 htmlEscape  
     unicodeString.hpp, 508  
 HtmlEscapeAscii  
     Tang::HtmlEscapeAscii, 402  
 htmlEscapeAscii  
     unicodeString.hpp, 508  
 include/astNode.hpp, 443  
 include/astNodeArray.hpp, 444  
 include/astNodeAssign.hpp, 445  
 include/astNodeBinary.hpp, 446  
 include/astNodeBlock.hpp, 447  
 include/astNodeBoolean.hpp, 448  
 include/astNodeBreak.hpp, 449  
 include/astNodeCast.hpp, 450  
 include/astNodeContinue.hpp, 451  
 include/astNodeDoWhile.hpp, 452  
 include/astNodeFloat.hpp, 453  
 include/astNodeFor.hpp, 454  
 include/astNodeFunctionCall.hpp, 455  
 include/astNodeFunctionDeclaration.hpp, 456  
 include/astNodeIdentifier.hpp, 457  
 include/astNodeIfElse.hpp, 457  
 include/astNodeIndex.hpp, 458  
 include/astNodeInteger.hpp, 459  
 include/astNodeLibrary.hpp, 460  
 include/astNodeMap.hpp, 461  
 include/astNodePeriod.hpp, 463  
 include/astNodePrint.hpp, 464  
 include/astNodeRangedFor.hpp, 465  
 include/astNodeReturn.hpp, 466  
 include/astNodeSlice.hpp, 467  
 include/astNodeString.hpp, 468  
 include/astNodeTernary.hpp, 469  
 include/astNodeUnary.hpp, 470  
 include/astNodeUse.hpp, 471  
 include/astNodeWhile.hpp, 472  
 include/computedExpression.hpp, 473  
 include/computedExpressionArray.hpp, 473  
 include/computedExpressionBoolean.hpp, 474  
 include/computedExpressionCompiledFunction.hpp, 475  
 include/computedExpressionError.hpp, 476  
 include/computedExpressionFloat.hpp, 477  
 include/computedExpressionInteger.hpp, 478  
 include/computedExpressionIterator.hpp, 478  
 include/computedExpressionIteratorEnd.hpp, 479  
 include/computedExpressionLibrary.hpp, 480  
 include/computedExpressionLibraryMath.hpp, 481  
 include/computedExpressionLibraryTang.hpp, 483  
 include/computedExpressionMap.hpp, 484  
 include/computedExpressionNativeBoundFunction.hpp, 485  
 include/computedExpressionNativeFunction.hpp, 486  
 include/computedExpressionNativeLibraryFunction.hpp, 487  
 include/computedExpressionString.hpp, 488  
 include/context.hpp, 488  
 include/error.hpp, 489  
 include/garbageCollected.hpp, 490  
 include/htmlEscape.hpp, 491  
 include/htmlEscapeAscii.hpp, 492  
 include/macros.hpp, 494  
 include/opcode.hpp, 495  
 include/percentEncode.hpp, 499  
 include/program.hpp, 500  
 include/singletonObjectPool.hpp, 501  
 include/tang.hpp, 502  
 include/tangBase.hpp, 503  
 include/tangScanner.hpp, 504  
 include/unescape.hpp, 506  
 include/unicodeString.hpp, 507  
 INDEX  
     opcode.hpp, 498  
 INTEGER  
     opcode.hpp, 496  
 Integer

Tang::AstNodeCast, 50  
is\_equal  
    Tang::ComputedExpression, 160–162  
    Tang::ComputedExpressionArray, 175–177  
    Tang::ComputedExpressionBoolean, 188–190  
    Tang::ComputedExpressionCompiledFunction, 201–203  
    Tang::ComputedExpressionError, 214–216  
    Tang::ComputedExpressionFloat, 228–230  
    Tang::ComputedExpressionInteger, 242–244  
    Tang::ComputedExpressionIterator, 256, 258, 259  
    Tang::ComputedExpressionIteratorEnd, 270, 272, 273  
    Tang::ComputedExpressionLibrary, 284, 286, 287  
    Tang::ComputedExpressionLibraryBase, 298, 300, 301  
    Tang::ComputedExpressionMap, 312–314  
    Tang::ComputedExpressionNativeBoundFunction, 329–331  
    Tang::ComputedExpressionNativeFunction, 343–345  
    Tang::ComputedExpressionNativeLibraryFunction, 358–360  
    Tang::ComputedExpressionString, 375–378  
IsAssignment  
    Tang::AstNode, 18  
    Tang::AstNodeArray, 23  
    Tang::AstNodeAssign, 27  
    Tang::AstNodeBinary, 33  
    Tang::AstNodeBlock, 37  
    Tang::AstNodeBoolean, 41  
    Tang::AstNodeBreak, 45  
    Tang::AstNodeCast, 49  
    Tang::AstNodeContinue, 53  
    Tang::AstNodeDoWhile, 58  
    Tang::AstNodeFloat, 62  
    Tang::AstNodeFor, 66  
    Tang::AstNodeFunctionCall, 70  
    Tang::AstNodeFunctionDeclaration, 74  
    Tang::AstNodeIdentifier, 78  
    Tang::AstNodeIfElse, 83  
    Tang::AstNodeIndex, 88  
    Tang::AstNodeInteger, 93  
    Tang::AstNodeLibrary, 97  
    Tang::AstNodeMap, 101  
    Tang::AstNodePeriod, 105  
    Tang::AstNodePrint, 110  
    Tang::AstNodeRangedFor, 113  
    Tang::AstNodeReturn, 118  
    Tang::AstNodeSlice, 122  
    Tang::AstNodeString, 127  
    Tang::AstNodeTernary, 133  
    Tang::AstNodeUnary, 138  
    Tang::AstNodeUse, 143  
    Tang::AstNodeWhile, 148  
isCopyNeeded  
    Tang::ComputedExpression, 162  
    Tang::ComputedExpressionArray, 178  
Tang::ComputedExpressionBoolean, 190  
Tang::ComputedExpressionCompiledFunction, 203  
Tang::ComputedExpressionError, 216  
Tang::ComputedExpressionFloat, 230  
Tang::ComputedExpressionInteger, 245  
Tang::ComputedExpressionIterator, 259  
Tang::ComputedExpressionIteratorEnd, 273  
Tang::ComputedExpressionLibrary, 287  
Tang::ComputedExpressionLibraryBase, 301  
Tang::ComputedExpressionMap, 315  
Tang::ComputedExpressionNativeBoundFunction, 331  
Tang::ComputedExpressionNativeFunction, 346  
Tang::ComputedExpressionNativeLibraryFunction, 360  
Tang::ComputedExpressionString, 378  
Tang::GarbageCollected, 386  
ISITERATOREND  
    opcode.hpp, 498  
ITERATORNEXT  
    opcode.hpp, 498  
JMP  
    opcode.hpp, 496  
JMPC\_I  
    opcode.hpp, 496  
JMPC\_POP  
    opcode.hpp, 496  
JMPC\_S  
    opcode.hpp, 496  
JMPT\_I  
    opcode.hpp, 496  
JMPT\_POP  
    opcode.hpp, 496  
JMPT\_S  
    opcode.hpp, 496  
length  
    Tang::ComputedExpressionString, 378  
    Tang::UnicodeString, 435  
LessThan  
    Tang::AstNodeBinary, 32  
LessThanEqual  
    Tang::AstNodeBinary, 32  
LIBRARY  
    opcode.hpp, 497  
    tangBase.cpp, 550  
LIBRARYCOPY  
    opcode.hpp, 497  
LIBRARYSAVE  
    opcode.hpp, 497  
location.hh  
    operator<<, 442, 443  
LT\_II  
    opcode.hpp, 497  
LT\_IS  
    opcode.hpp, 497  
LT\_SI  
    opcode.hpp, 497

LT\_SS  
     opcode.hpp, 497

LTE\_II  
     opcode.hpp, 497

LTE\_IS  
     opcode.hpp, 497

LTE\_SI  
     opcode.hpp, 497

LTE\_SS  
     opcode.hpp, 497

make  
     Tang::GarbageCollected, 387

make\_shared  
     Tang::TangBase, 428

makeCopy  
     Tang::ComputedExpression, 163  
     Tang::ComputedExpressionArray, 178  
     Tang::ComputedExpressionBoolean, 191  
     Tang::ComputedExpressionCompiledFunction, 204  
     Tang::ComputedExpressionError, 217  
     Tang::ComputedExpressionFloat, 231  
     Tang::ComputedExpressionInteger, 245  
     Tang::ComputedExpressionIterator, 259  
     Tang::ComputedExpressionIteratorEnd, 273  
     Tang::ComputedExpressionLibrary, 287  
     Tang::ComputedExpressionLibraryBase, 301  
     Tang::ComputedExpressionMap, 315  
     Tang::ComputedExpressionNativeBoundFunction,  
         331  
     Tang::ComputedExpressionNativeFunction, 346  
     Tang::ComputedExpressionNativeLibraryFunction,  
         361  
     Tang::ComputedExpressionString, 379  
     Tang::GarbageCollected, 387

MAP  
     opcode.hpp, 497

Modulo  
     Tang::AstNodeBinary, 32

MODULO\_II  
     opcode.hpp, 497

MODULO\_IS  
     opcode.hpp, 497

MODULO\_SI  
     opcode.hpp, 497

MODULO\_SS  
     opcode.hpp, 497

Multiply  
     Tang::AstNodeBinary, 32

MULTIPLY\_II  
     opcode.hpp, 497

MULTIPLY\_IS  
     opcode.hpp, 497

MULTIPLY\_SI  
     opcode.hpp, 497

MULTIPLY\_SS  
     opcode.hpp, 497

Negative

    Tang::AstNodeUnary, 138

NEGATIVE\_I  
     opcode.hpp, 497

NEGATIVE\_S  
     opcode.hpp, 497

NEQ\_II  
     opcode.hpp, 498

NEQ\_IS  
     opcode.hpp, 498

NEQ\_SI  
     opcode.hpp, 498

NEQ\_SS  
     opcode.hpp, 498

Not  
     Tang::AstNodeUnary, 138

NOT\_I  
     opcode.hpp, 497

NOT\_S  
     opcode.hpp, 497

NotEqual  
     Tang::AstNodeBinary, 32

NULLVAL  
     opcode.hpp, 496

Opcode  
     opcode.hpp, 496

opcode.hpp  
     ADD\_II, 497  
     ADD\_IS, 497  
     ADD\_SI, 497  
     ADD\_SS, 497  
     ARRAY, 497  
     ASSIGNINDEX, 497  
     BOOLEAN, 497  
     CALLFUNC, 498  
     CALLFUNC\_I, 498  
     CASTBOOLEAN\_I, 498  
     CASTBOOLEAN\_S, 498  
     CASTFLOAT\_I, 498  
     CASTFLOAT\_S, 498  
     CASTINTEGER\_I, 498  
     CASTINTEGER\_S, 498  
     CASTSTRING\_I, 498  
     CASTSTRING\_S, 498  
     COPY, 496  
     DIVIDE\_II, 497  
     DIVIDE\_IS, 497  
     DIVIDE\_SI, 497  
     DIVIDE\_SS, 497  
     EQ\_II, 498  
     EQ\_IS, 498  
     EQ\_SI, 498  
     EQ\_SS, 498  
     FLOAT, 496  
     FUNCTION, 497  
     GETITERATOR, 498  
     GT\_II, 497  
     GT\_IS, 497  
     GT\_SI, 497

GT\_SS, 497  
GTE\_II, 498  
GTE\_IS, 497  
GTE\_SI, 497  
GTE\_SS, 497  
INDEX, 498  
INTEGER, 496  
ISITERATOREND, 498  
ITERATORNEXT, 498  
JMP, 496  
JMPF\_I, 496  
JMPF\_POP, 496  
JMPF\_S, 496  
JMPT\_I, 496  
JMPT\_POP, 496  
JMPT\_S, 496  
LIBRARY, 497  
LIBRARYCOPY, 497  
LIBRARYSAVE, 497  
LT\_II, 497  
LT\_IS, 497  
LT\_SI, 497  
LT\_SS, 497  
LTE\_II, 497  
LTE\_IS, 497  
LTE\_SI, 497  
LTE\_SS, 497  
MAP, 497  
MODULO\_II, 497  
MODULO\_IS, 497  
MODULO\_SI, 497  
MODULO\_SS, 497  
MULTIPLY\_II, 497  
MULTIPLY\_IS, 497  
MULTIPLY\_SI, 497  
MULTIPLY\_SS, 497  
NEGATIVE\_I, 497  
NEGATIVE\_S, 497  
NEQ\_II, 498  
NEQ\_IS, 498  
NEQ\_SI, 498  
NEQ\_SS, 498  
NOT\_I, 497  
NOT\_S, 497  
NULLVAL, 496  
Opcode, 496  
operator<<, 498  
PEEK, 496  
PERIOD, 498  
POKE, 496  
POP, 496  
PRINT, 498  
RETURN, 498  
SLICE, 498  
STRING, 497  
SUBTRACT\_II, 497  
SUBTRACT\_IS, 497  
SUBTRACT\_SI, 497  
SUBTRACT\_SS, 497  
OpcodePositions  
    program.hpp, 501  
Operation  
    Tang::AstNodeBinary, 32  
Operator  
    Tang::AstNodeUnary, 137  
operator std::string  
    Tang::UnicodeString, 435  
operator!  
    Tang::GarbageCollected, 388  
operator!=  
    Tang::GarbageCollected, 388  
operator<  
    Tang::GarbageCollected, 393  
    Tang::UnicodeString, 436  
operator<<  
    error.cpp, 539  
    garbageCollected.cpp, 540  
    location.hh, 442, 443  
    opcode.hpp, 498  
    Tang::Error, 382  
    Tang::GarbageCollected, 398  
operator<=

operator>=

operator>

operator<=

operator>=

operator\*  
    Tang::GarbageCollected, 389, 390

operator+  
    Tang::GarbageCollected, 390  
    Tang::UnicodeString, 436

operator+=  
    Tang::ComputedExpressionString, 379  
    Tang::UnicodeString, 436

operator-  
    Tang::GarbageCollected, 391

operator->  
    Tang::GarbageCollected, 392

operator/  
    Tang::GarbageCollected, 392

operator=

operator==  
    Tang::GarbageCollected, 394–397  
    Tang::UnicodeString, 437

operator%  
    Tang::GarbageCollected, 389

Or  
    Tang::AstNodeBinary, 32

PEEK  
    opcode.hpp, 496

Percent  
    Tang::UnicodeString, 435

PercentEncode  
    Tang::PercentEncode, 406

percentEncode  
     unicodeString.hpp, 509  
 PERIOD  
     opcode.hpp, 498  
 POKE  
     opcode.hpp, 496  
 POP  
     opcode.hpp, 496  
 popBreakStack  
     Tang::Program, 418  
 popContinueStack  
     Tang::Program, 418  
 PreprocessState  
     Tang::AstNode, 18  
     Tang::AstNodeArray, 23  
     Tang::AstNodeAssign, 27  
     Tang::AstNodeBinary, 33  
     Tang::AstNodeBlock, 37  
     Tang::AstNodeBoolean, 41  
     Tang::AstNodeBreak, 45  
     Tang::AstNodeCast, 49  
     Tang::AstNodeContinue, 53  
     Tang::AstNodeDoWhile, 58  
     Tang::AstNodeFloat, 62  
     Tang::AstNodeFor, 66  
     Tang::AstNodeFunctionCall, 70  
     Tang::AstNodeFunctionDeclaration, 74  
     Tang::AstNodeIdentifier, 78  
     Tang::AstNodeIfElse, 83  
     Tang::AstNodeIndex, 88  
     Tang::AstNodeInteger, 93  
     Tang::AstNodeLibrary, 97  
     Tang::AstNodeMap, 101  
     Tang::AstNodePeriod, 105  
     Tang::AstNodePrint, 109  
     Tang::AstNodeRangedFor, 113  
     Tang::AstNodeReturn, 118  
     Tang::AstNodeSlice, 122  
     Tang::AstNodeString, 127  
     Tang::AstNodeTernary, 133  
     Tang::AstNodeUnary, 138  
     Tang::AstNodeUse, 143  
     Tang::AstNodeWhile, 148  
 PRINT  
     opcode.hpp, 498  
 Program  
     Tang::Program, 411, 412  
 program-analyze.cpp  
     DUMPPROGRAMCHECK, 542  
 program-dumpBytecode.cpp  
     DUMPBIN, 543  
     DUMPBIN\_I, 543  
     DUMPBIN\_I, 544  
     DUMPPROGRAMCHECK, 544  
 program-execute.cpp  
     BINARYOP\_II, 545  
     BINARYOP\_IS, 546  
     BINARYOP\_SI, 546  
     BINARYOP\_SS, 546  
     CASTOP\_I, 546  
     CASTOP\_S, 547  
     EXECUTEPROGRAMCHECK, 547  
     STACKCHECK, 547  
     UNARYOP\_I, 548  
     UNARYOP\_S, 548  
 program.hpp  
     OpcodePositions, 501  
 pushEnvironment  
     Tang::Program, 419  
 recycle  
     Tang::SingletonObjectPool< T >, 423  
 render  
     Tang::UnicodeString, 437  
 renderAscii  
     Tang::UnicodeString, 438  
 RETURN  
     opcode.hpp, 498  
 Script  
     Tang::Program, 411  
 setAnnotation  
     Tang::Program, 419  
 setFunctionStackDeclaration  
     Tang::Program, 420  
 setJumpTarget  
     Tang::Program, 420  
 SLICE  
     opcode.hpp, 498  
 src/astNode.cpp, 510  
 src/astNodeArray.cpp, 511  
 src/astNodeAssign.cpp, 512  
 src/astNodeBinary.cpp, 512  
 src/astNodeBlock.cpp, 513  
 src/astNodeBoolean.cpp, 513  
 src/astNodeBreak.cpp, 514  
 src/astNodeCast.cpp, 515  
 src/astNodeContinue.cpp, 516  
 src/astNodeDoWhile.cpp, 516  
 src/astNodeFloat.cpp, 517  
 src/astNodeFor.cpp, 517  
 src/astNodeFunctionCall.cpp, 518  
 src/astNodeFunctionDeclaration.cpp, 518  
 src/astNodeIdentifier.cpp, 519  
 src/astNodeIfElse.cpp, 519  
 src/astNodeIndex.cpp, 520  
 src/astNodeInteger.cpp, 520  
 src/astNodeLibrary.cpp, 521  
 src/astNodeMap.cpp, 521  
 src/astNodePeriod.cpp, 522  
 src/astNodePrint.cpp, 522  
 src/astNodeRangedFor.cpp, 523  
 src/astNodeReturn.cpp, 523  
 src/astNodeSlice.cpp, 524  
 src/astNodeString.cpp, 525  
 src/astNodeTernary.cpp, 525  
 src/astNodeUnary.cpp, 526

src/astNodeUse.cpp, 527  
src/astNodeWhile.cpp, 528  
src/computedExpression.cpp, 528  
src/computedExpressionArray.cpp, 529  
src/computedExpressionBoolean.cpp, 529  
src/computedExpressionCompiledFunction.cpp, 530  
src/computedExpressionError.cpp, 531  
src/computedExpressionFloat.cpp, 531  
src/computedExpressionInteger.cpp, 532  
src/computedExpressionIterator.cpp, 532  
src/computedExpressionIteratorEnd.cpp, 533  
src/computedExpressionLibrary.cpp, 534  
src/computedExpressionLibraryMath.cpp, 534  
src/computedExpressionLibraryTang.cpp, 535  
src/computedExpressionMap.cpp, 535  
src/computedExpressionNativeBoundFunction.cpp, 536  
src/computedExpressionNativeFunction.cpp, 536  
src/computedExpressionNativeLibraryFunction.cpp, 537  
src/computedExpressionString.cpp, 538  
src/context.cpp, 538  
src/error.cpp, 539  
src/garbageCollected.cpp, 540  
src/opcode.cpp, 541  
src/program-analyze.cpp, 541  
src/program-dumpBytecode.cpp, 543  
src/program-execute.cpp, 544  
src/program-optimize.cpp, 548  
src/program.cpp, 549  
src/tang.cpp, 549  
src/tangBase.cpp, 550  
src/unicodeString.cpp, 551  
STACKCHECK  
    program-execute.cpp, 547  
STRING  
    opcode.hpp, 497  
String  
    Tang::AstNodeCast, 50  
substr  
    Tang::UnicodeString, 438  
Subtract  
    Tang::AstNodeBinary, 32  
SUBTRACT\_II  
    opcode.hpp, 497  
SUBTRACT\_IS  
    opcode.hpp, 497  
SUBTRACT\_SI  
    opcode.hpp, 497  
SUBTRACT\_SS  
    opcode.hpp, 497  
  
Tang::AstNode, 15  
    AstNode, 18  
    compile, 19  
    compilePreprocess, 19  
    Default, 18  
    dump, 20  
    IsAssignment, 18  
    PreprocessState, 18  
Tang::AstNodeArray, 21  
    AstNodeArray, 23  
    compile, 24  
    compilePreprocess, 24  
    Default, 23  
    dump, 25  
    IsAssignment, 23  
    PreprocessState, 23  
Tang::AstNodeAssign, 25  
    AstNodeAssign, 27  
    compile, 28  
    compilePreprocess, 28  
    Default, 27  
    dump, 29  
    IsAssignment, 27  
    PreprocessState, 27  
Tang::AstNodeBinary, 29  
    Add, 32  
    And, 32  
    AstNodeBinary, 33  
    compile, 33  
    compilePreprocess, 34  
    Default, 33  
    Divide, 32  
    dump, 34  
    Equal, 32  
    GreaterThan, 32  
    GreaterThanOrEqualTo, 32  
    IsAssignment, 33  
    LessThan, 32  
    LessThanOrEqualTo, 32  
    Modulo, 32  
    Multiply, 32  
    NotEqual, 32  
    Operation, 32  
    Or, 32  
    PreprocessState, 33  
    Subtract, 32  
Tang::AstNodeBlock, 35  
    AstNodeBlock, 37  
    compile, 38  
    compilePreprocess, 38  
    Default, 37  
    dump, 39  
    IsAssignment, 37  
    PreprocessState, 37  
Tang::AstNodeBoolean, 39  
    AstNodeBoolean, 41  
    compile, 42  
    compilePreprocess, 42  
    Default, 41  
    dump, 43  
    IsAssignment, 41  
    PreprocessState, 41  
Tang::AstNodeBreak, 43  
    AstNodeBreak, 45  
    compile, 45  
    compilePreprocess, 46  
    Default, 45

dump, 47  
IsAssignment, 45  
PreprocessState, 45  
Tang::AstNodeCast, 47  
AstNodeCast, 50  
Boolean, 50  
compile, 50  
compilePreprocess, 50  
Default, 49  
dump, 51  
Float, 50  
Integer, 50  
IsAssignment, 49  
PreprocessState, 49  
String, 50  
Type, 49  
Tang::AstNodeContinue, 51  
AstNodeContinue, 53  
compile, 54  
compilePreprocess, 54  
Default, 53  
dump, 55  
IsAssignment, 53  
PreprocessState, 53  
Tang::AstNodeDoWhile, 55  
AstNodeDoWhile, 58  
compile, 59  
compilePreprocess, 59  
Default, 58  
dump, 60  
IsAssignment, 58  
PreprocessState, 58  
Tang::AstNodeFloat, 60  
AstNodeFloat, 62  
compile, 63  
compilePreprocess, 63  
Default, 62  
dump, 64  
IsAssignment, 62  
PreprocessState, 62  
Tang::AstNodeFor, 64  
AstNodeFor, 67  
compile, 67  
compilePreprocess, 68  
Default, 66  
dump, 68  
IsAssignment, 66  
PreprocessState, 66  
Tang::AstNodeFunctionCall, 69  
AstNodeFunctionCall, 71  
compile, 71  
compilePreprocess, 72  
Default, 70  
dump, 72  
IsAssignment, 70  
PreprocessState, 70  
Tang::AstNodeFunctionDeclaration, 72  
AstNodeFunctionDeclaration, 74  
compile, 75  
compilePreprocess, 75  
Default, 74  
dump, 76  
IsAssignment, 74  
PreprocessState, 74  
Tang::AstNodeIdentifier, 76  
AstNodeIdentifier, 79  
compile, 79  
compilePreprocess, 80  
Default, 78  
dump, 80  
IsAssignment, 78  
PreprocessState, 78  
Tang::AstNodeIfElse, 81  
AstNodeIfElse, 84  
compile, 84  
compilePreprocess, 85  
Default, 83  
dump, 85  
IsAssignment, 83  
PreprocessState, 83  
Tang::AstNodeIndex, 86  
AstNodeIndex, 88  
compile, 89  
compilePreprocess, 89  
Default, 88  
dump, 90  
getCollection, 90  
getIndex, 90  
IsAssignment, 88  
PreprocessState, 88  
Tang::AstNodeInteger, 91  
AstNodeInteger, 93  
compile, 94  
compilePreprocess, 94  
Default, 93  
dump, 95  
IsAssignment, 93  
PreprocessState, 93  
Tang::AstNodeLibrary, 95  
AstNodeLibrary, 97  
compile, 98  
compilePreprocess, 98  
Default, 97  
dump, 99  
IsAssignment, 97  
PreprocessState, 97  
Tang::AstNodeMap, 99  
AstNodeMap, 101  
compile, 101  
compilePreprocess, 102  
Default, 101  
dump, 103  
IsAssignment, 101  
PreprocessState, 101  
Tang::AstNodePeriod, 103  
AstNodePeriod, 105

compile, 106  
compilePreprocess, 106  
Default, 105  
dump, 107  
IsAssignment, 105  
PreprocessState, 105  
Tang::AstNodePrint, 107  
AstNodePrint, 110  
compile, 110  
compilePreprocess, 111  
Default, 110  
dump, 111  
IsAssignment, 110  
PreprocessState, 109  
Type, 110  
Tang::AstNodeRangedFor, 112  
AstNodeRangedFor, 114  
compile, 114  
compilePreprocess, 115  
Default, 113  
dump, 116  
IsAssignment, 113  
PreprocessState, 113  
Tang::AstNodeReturn, 116  
AstNodeReturn, 118  
compile, 119  
compilePreprocess, 119  
Default, 118  
dump, 120  
IsAssignment, 118  
PreprocessState, 118  
Tang::AstNodeSlice, 120  
AstNodeSlice, 123  
compile, 123  
compilePreprocess, 124  
Default, 122  
dump, 124  
IsAssignment, 122  
PreprocessState, 122  
Tang::AstNodeString, 125  
AstNodeString, 127, 128  
compile, 128  
compileLiteral, 129  
compilePreprocess, 129  
Default, 127  
dump, 130  
IsAssignment, 127  
PreprocessState, 127  
Tang::AstNodeTernary, 130  
AstNodeTernary, 133  
compile, 134  
compilePreprocess, 134  
Default, 133  
dump, 135  
IsAssignment, 133  
PreprocessState, 133  
Tang::AstNodeUnary, 135  
AstNodeUnary, 138  
compile, 138  
compilePreprocess, 140  
Default, 138  
dump, 140  
IsAssignment, 138  
Negative, 138  
Not, 138  
Operator, 137  
PreprocessState, 138  
Tang::AstNodeUse, 141  
AstNodeUse, 143  
compile, 144  
compilePreprocess, 144  
Default, 143  
dump, 145  
IsAssignment, 143  
PreprocessState, 143  
Tang::AstNodeWhile, 145  
AstNodeWhile, 148  
compile, 149  
compilePreprocess, 149  
Default, 148  
dump, 150  
IsAssignment, 148  
PreprocessState, 148  
Tang::ComputedExpression, 150  
\_\_add, 153  
\_\_asCode, 153  
\_\_assign\_index, 153  
\_\_boolean, 154  
\_\_divide, 154  
\_\_equal, 154  
\_\_float, 155  
\_\_getIterator, 155  
\_\_index, 155  
\_\_integer, 156  
\_\_iteratorNext, 156  
\_\_lessThan, 156  
\_\_modulo, 157  
\_\_multiply, 157  
\_\_negative, 158  
\_\_not, 158  
\_\_period, 158  
\_\_slice, 159  
\_\_string, 159  
\_\_subtract, 159  
dump, 160  
is\_equal, 160–162  
isCopyNeeded, 162  
makeCopy, 163  
Tang::ComputedExpressionArray, 163  
\_\_add, 166  
\_\_asCode, 166  
\_\_assign\_index, 167  
\_\_boolean, 167  
\_\_divide, 168  
\_\_equal, 168  
\_\_float, 169

\_\_getIterator, 169  
 \_\_index, 169  
 \_\_integer, 170  
 \_\_iteratorNext, 170  
 \_\_lessThan, 170  
 \_\_modulo, 171  
 \_\_multiply, 171  
 \_\_negative, 172  
 \_\_not, 172  
 \_\_period, 172  
 \_\_slice, 173  
 \_\_string, 173  
 \_\_subtract, 174  
 append, 174  
 ComputedExpressionArray, 166  
 dump, 175  
 getContents, 175  
 getMethods, 175  
 is\_equal, 175–177  
 isCopyNeeded, 178  
 makeCopy, 178  
 Tang::ComputedExpressionBoolean, 179  
 \_\_add, 181  
 \_\_asCode, 181  
 \_\_assign\_index, 182  
 \_\_boolean, 182  
 \_\_divide, 182  
 \_\_equal, 183  
 \_\_float, 183  
 \_\_getIterator, 183  
 \_\_index, 184  
 \_\_integer, 184  
 \_\_iteratorNext, 184  
 \_\_lessThan, 185  
 \_\_modulo, 185  
 \_\_multiply, 185  
 \_\_negative, 186  
 \_\_not, 186  
 \_\_period, 186  
 \_\_slice, 187  
 \_\_string, 187  
 \_\_subtract, 187  
 ComputedExpressionBoolean, 181  
 dump, 188  
 is\_equal, 188–190  
 isCopyNeeded, 190  
 makeCopy, 191  
 Tang::ComputedExpressionCompiledFunction, 191  
 \_\_add, 194  
 \_\_asCode, 194  
 \_\_assign\_index, 194  
 \_\_boolean, 195  
 \_\_divide, 195  
 \_\_equal, 196  
 \_\_float, 196  
 \_\_getIterator, 196  
 \_\_index, 197  
 \_\_integer, 197  
 \_\_iteratorNext, 197  
 \_\_lessThan, 198  
 \_\_modulo, 198  
 \_\_multiply, 198  
 \_\_negative, 199  
 \_\_not, 199  
 \_\_period, 199  
 \_\_slice, 200  
 \_\_string, 200  
 \_\_subtract, 200  
 ComputedExpressionCompiledFunction, 193  
 dump, 201  
 is\_equal, 201–203  
 isCopyNeeded, 203  
 makeCopy, 204  
 Tang::ComputedExpressionError, 204  
 \_\_add, 207  
 \_\_asCode, 207  
 \_\_assign\_index, 208  
 \_\_boolean, 208  
 \_\_divide, 208  
 \_\_equal, 209  
 \_\_float, 209  
 \_\_getIterator, 209  
 \_\_index, 210  
 \_\_integer, 210  
 \_\_iteratorNext, 210  
 \_\_lessThan, 211  
 \_\_modulo, 211  
 \_\_multiply, 211  
 \_\_negative, 212  
 \_\_not, 212  
 \_\_period, 212  
 \_\_slice, 213  
 \_\_string, 213  
 \_\_subtract, 213  
 ComputedExpressionError, 207  
 dump, 214  
 is\_equal, 214–216  
 isCopyNeeded, 216  
 makeCopy, 217  
 Tang::ComputedExpressionFloat, 217  
 \_\_add, 220  
 \_\_asCode, 220  
 \_\_assign\_index, 220  
 \_\_boolean, 221  
 \_\_divide, 221  
 \_\_equal, 222  
 \_\_float, 222  
 \_\_getIterator, 223  
 \_\_index, 223  
 \_\_integer, 223  
 \_\_iteratorNext, 223  
 \_\_lessThan, 224  
 \_\_modulo, 224  
 \_\_multiply, 225  
 \_\_negative, 225  
 \_\_not, 225

\_\_period, 226  
    \_\_slice, 226  
    \_\_string, 227  
    \_\_subtract, 227  
    ComputedExpressionFloat, 219  
    dump, 228  
    getValue, 228  
    is\_equal, 228–230  
    isCopyNeeded, 230  
    makeCopy, 231  
Tang::ComputedExpressionInteger, 231  
    \_\_add, 234  
    \_\_asCode, 234  
    \_\_assign\_index, 234  
    \_\_boolean, 235  
    \_\_divide, 235  
    \_\_equal, 236  
    \_\_float, 236  
    \_\_getIterator, 237  
    \_\_index, 237  
    \_\_integer, 237  
    \_\_iteratorNext, 237  
    \_\_lessThan, 238  
    \_\_modulo, 238  
    \_\_multiply, 239  
    \_\_negative, 239  
    \_\_not, 240  
    \_\_period, 240  
    \_\_slice, 240  
    \_\_string, 241  
    \_\_subtract, 241  
    ComputedExpressionInteger, 233  
    dump, 242  
    getValue, 242  
    is\_equal, 242–244  
    isCopyNeeded, 245  
    makeCopy, 245  
Tang::ComputedExpressionIterator, 246  
    \_\_add, 248  
    \_\_asCode, 249  
    \_\_assign\_index, 249  
    \_\_boolean, 249  
    \_\_divide, 250  
    \_\_equal, 250  
    \_\_float, 251  
    \_\_getIterator, 251  
    \_\_index, 251  
    \_\_integer, 252  
    \_\_iteratorNext, 252  
    \_\_lessThan, 252  
    \_\_modulo, 253  
    \_\_multiply, 253  
    \_\_negative, 254  
    \_\_not, 254  
    \_\_period, 254  
    \_\_slice, 255  
    \_\_string, 255  
    \_\_subtract, 255  
    ComputedExpressionIterator, 248  
    dump, 256  
    is\_equal, 256, 258, 259  
    isCopyNeeded, 259  
    makeCopy, 259  
Tang::ComputedExpressionIteratorEnd, 260  
    \_\_add, 262  
    \_\_asCode, 263  
    \_\_assign\_index, 263  
    \_\_boolean, 263  
    \_\_divide, 264  
    \_\_equal, 264  
    \_\_float, 265  
    \_\_getIterator, 265  
    \_\_index, 265  
    \_\_integer, 266  
    \_\_iteratorNext, 266  
    \_\_lessThan, 266  
    \_\_modulo, 267  
    \_\_multiply, 267  
    \_\_negative, 267  
    \_\_not, 268  
    \_\_period, 268  
    \_\_slice, 268  
    \_\_string, 269  
    \_\_subtract, 269  
    dump, 270  
    is\_equal, 270, 272, 273  
    isCopyNeeded, 273  
    makeCopy, 273  
Tang::ComputedExpressionLibrary, 274  
    \_\_add, 276  
    \_\_asCode, 277  
    \_\_assign\_index, 277  
    \_\_boolean, 277  
    \_\_divide, 278  
    \_\_equal, 278  
    \_\_float, 279  
    \_\_getIterator, 279  
    \_\_index, 279  
    \_\_integer, 280  
    \_\_iteratorNext, 280  
    \_\_lessThan, 280  
    \_\_modulo, 281  
    \_\_multiply, 281  
    \_\_negative, 281  
    \_\_not, 282  
    \_\_period, 282  
    \_\_slice, 282  
    \_\_string, 283  
    \_\_subtract, 283  
    dump, 284  
    is\_equal, 284, 286, 287  
    isCopyNeeded, 287  
    makeCopy, 287  
Tang::ComputedExpressionLibraryBase, 288  
    \_\_add, 290  
    \_\_asCode, 291

\_\_assign\_index, 291  
 \_\_boolean, 291  
 \_\_divide, 292  
 \_\_equal, 292  
 \_\_float, 293  
 \_\_getIterator, 293  
 \_\_index, 293  
 \_\_integer, 294  
 \_\_iteratorNext, 294  
 \_\_lessThan, 294  
 \_\_modulo, 295  
 \_\_multiply, 295  
 \_\_negative, 295  
 \_\_not, 296  
 \_\_period, 296  
 \_\_slice, 296  
 \_\_string, 297  
 \_\_subtract, 297  
 dump, 298  
 is\_equal, 298, 300, 301  
 isCopyNeeded, 301  
 makeCopy, 301  
 Tang::ComputedExpressionMap, 302  
 \_\_add, 305  
 \_\_asCode, 305  
 \_\_assign\_index, 305  
 \_\_boolean, 306  
 \_\_divide, 306  
 \_\_equal, 307  
 \_\_float, 307  
 \_\_getIterator, 307  
 \_\_index, 308  
 \_\_integer, 308  
 \_\_iteratorNext, 308  
 \_\_lessThan, 309  
 \_\_modulo, 309  
 \_\_multiply, 310  
 \_\_negative, 310  
 \_\_not, 310  
 \_\_period, 310  
 \_\_slice, 311  
 \_\_string, 311  
 \_\_subtract, 312  
 ComputedExpressionMap, 305  
 dump, 312  
 is\_equal, 312–314  
 isCopyNeeded, 315  
 makeCopy, 315  
 Tang::ComputedExpressionNativeBoundFunction, 316  
 \_\_add, 319  
 \_\_asCode, 320  
 \_\_assign\_index, 320  
 \_\_boolean, 320  
 \_\_divide, 321  
 \_\_equal, 321  
 \_\_float, 322  
 \_\_getIterator, 322  
 \_\_index, 322  
 \_\_integer, 323  
 \_\_iteratorNext, 323  
 \_\_lessThan, 323  
 \_\_modulo, 325  
 \_\_multiply, 325  
 \_\_negative, 325  
 \_\_not, 326  
 \_\_period, 326  
 \_\_slice, 326  
 \_\_string, 327  
 \_\_subtract, 327  
 ComputedExpressionNativeBoundFunction, 318  
 dump, 328  
 getArgc, 328  
 getFunction, 328  
 getTargetTypeIndex, 328  
 is\_equal, 329–331  
 isCopyNeeded, 331  
 makeCopy, 331  
 Tang::ComputedExpressionNativeFunction, 332  
 \_\_add, 334  
 \_\_asCode, 335  
 \_\_assign\_index, 335  
 \_\_boolean, 336  
 \_\_divide, 336  
 \_\_equal, 336  
 \_\_float, 337  
 \_\_getIterator, 337  
 \_\_index, 338  
 \_\_integer, 338  
 \_\_iteratorNext, 338  
 \_\_lessThan, 339  
 \_\_modulo, 339  
 \_\_multiply, 339  
 \_\_negative, 340  
 \_\_not, 340  
 \_\_period, 340  
 \_\_slice, 341  
 \_\_string, 341  
 \_\_subtract, 341  
 ComputedExpressionNativeFunction, 334  
 dump, 342  
 getArgc, 342  
 getFunction, 342  
 is\_equal, 343–345  
 isCopyNeeded, 346  
 makeCopy, 346  
 Tang::ComputedExpressionNativeLibraryFunction, 347  
 \_\_add, 349  
 \_\_asCode, 350  
 \_\_assign\_index, 350  
 \_\_boolean, 350  
 \_\_divide, 351  
 \_\_equal, 351  
 \_\_float, 352  
 \_\_getIterator, 352  
 \_\_index, 352  
 \_\_integer, 353

\_\_iteratorNext, 353  
    \_\_lessThan, 353  
    \_\_modulo, 355  
    \_\_multiply, 355  
    \_\_negative, 355  
    \_\_not, 356  
    \_\_period, 356  
    \_\_slice, 356  
    \_\_string, 357  
    \_\_subtract, 357  
    ComputedExpressionNativeLibraryFunction, 349  
    dump, 358  
    getFunction, 358  
    is\_equal, 358–360  
    isCopyNeeded, 360  
    makeCopy, 361  
Tang::ComputedExpressionString, 361  
    \_\_add, 365  
    \_\_asCode, 365  
    \_\_assign\_index, 366  
    \_\_boolean, 366  
    \_\_divide, 367  
    \_\_equal, 367  
    \_\_float, 368  
    \_\_getIterator, 368  
    \_\_index, 369  
    \_\_integer, 369  
    \_\_iteratorNext, 369  
    \_\_lessThan, 370  
    \_\_modulo, 371  
    \_\_multiply, 371  
    \_\_negative, 372  
    \_\_not, 372  
    \_\_period, 372  
    \_\_slice, 373  
    \_\_string, 374  
    \_\_subtract, 374  
    bytesLength, 374  
    ComputedExpressionString, 364  
    dump, 374  
    getMethods, 375  
    getValue, 375  
    is\_equal, 375–378  
    isCopyNeeded, 378  
    length, 378  
    makeCopy, 379  
    operator+=, 379  
Tang::Context, 380  
Tang::Error, 381  
    Error, 382  
    operator<<, 382  
Tang::GarbageCollected, 383  
    ~GarbageCollected, 386  
    GarbageCollected, 385, 386  
    isCopyNeeded, 386  
    make, 387  
    makeCopy, 387  
    operator!, 388  
operator!=, 388  
operator<, 393  
operator<<, 398  
operator<=, 393  
operator>, 397  
operator>=, 398  
operator\*, 389, 390  
operator+, 390  
operator-, 391  
operator->, 392  
operator/, 392  
operator=, 394  
operator==, 394–397  
operator%, 389  
Tang::HtmlEscape, 399  
    get\_next\_token, 401  
    HtmlEscape, 400  
Tang::HtmlEscapeAscii, 401  
    get\_next\_token, 403  
    HtmlEscapeAscii, 402  
Tang::location, 403  
Tang::PercentEncode, 405  
    get\_next\_token, 406  
    PercentEncode, 406  
Tang::position, 407  
Tang::Program, 408  
    addBreak, 412  
    addBytecode, 413  
    addContinue, 413  
    addIdentifier, 413  
    addIdentifierAssigned, 413  
    addLibraryAlias, 414  
    addString, 414  
    CodeType, 411  
    dumpBytecode, 414  
    execute, 415  
    functionsDeclared, 420  
    getAnnotations, 416  
    getAst, 416  
    getBytecode, 416  
    getCode, 416  
    getIdentifiers, 416  
    getIdentifiersAssigned, 417  
    getLibraryAliases, 417  
    getResult, 417  
    getStrings, 417  
    popBreakStack, 418  
    popContinueStack, 418  
    Program, 411, 412  
    pushEnvironment, 419  
    Script, 411  
    setAnnotation, 419  
    setFunctionStackDeclaration, 420  
    setJumpTarget, 420  
    Template, 411  
Tang::SingletonObjectPool< T >, 421  
    currentIndex, 423  
    currentRecycledIndex, 423

get, 422  
getInstance, 422  
recycle, 423  
Tang::TangBase, 424  
compileScript, 425, 426  
compileTemplate, 426  
make\_shared, 428  
TangBase, 425  
Tang::TangScanner, 428  
get\_next\_token, 430  
TangScanner, 430  
Tang::Unescape, 431  
get\_next\_token, 432  
Unescape, 432  
Tang::UnicodeString, 433  
bytesLength, 435  
length, 435  
operator std::string, 435  
operator<, 436  
operator+, 436  
operator+=, 436  
operator==, 437  
Percent, 435  
render, 437  
renderAscii, 438  
substr, 438  
Trusted, 435  
Type, 434  
Untrusted, 435  
TangBase  
Tang::TangBase, 425  
tangBase.cpp  
LIBRARY, 550  
TangScanner  
Tang::TangScanner, 430  
Template  
Tang::Program, 411  
test/test.cpp, 551  
test/testGarbageCollected.cpp, 553  
test/testSingletonObjectPool.cpp, 554  
test/testUnicodeString.cpp, 555  
Trusted  
Tang::UnicodeString, 435  
Type  
Tang::AstNodeCast, 49  
Tang::AstNodePrint, 110  
Tang::UnicodeString, 434  
UNARYOP  
astNodeUnary.cpp, 526  
UNARYOP\_I  
program-execute.cpp, 548  
UNARYOP\_S  
program-execute.cpp, 548  
Unescape  
Tang::Unescape, 432  
unescape  
unicodeString.hpp, 510  
unicodeString.hpp

htmlEscape, 508  
htmlEscapeAscii, 508  
percentEncode, 509  
unescape, 510  
Untrusted  
Tang::UnicodeString, 435