

Tang

0.1

Generated by Doxygen 1.9.1

1 Tang: A Template Language	1
1.1 Quick Description	1
1.2 Features	1
1.3 License	1
2 Hierarchical Index	3
2.1 Class Hierarchy	3
3 Class Index	5
3.1 Class List	5
4 File Index	7
4.1 File List	7
5 Class Documentation	9
5.1 Tang::AstNode Class Reference	9
5.1.1 Detailed Description	11
5.1.2 Constructor & Destructor Documentation	11
5.1.2.1 AstNode()	11
5.1.3 Member Function Documentation	11
5.1.3.1 makeCopy()	11
5.2 Tang::AstNodeAdd Class Reference	12
5.2.1 Detailed Description	14
5.2.2 Constructor & Destructor Documentation	14
5.2.2.1 AstNodeAdd()	14
5.2.3 Member Function Documentation	14
5.2.3.1 makeCopy()	14
5.3 Tang::AstNodeFloat Class Reference	15
5.3.1 Detailed Description	17
5.3.2 Constructor & Destructor Documentation	17
5.3.2.1 AstNodeFloat()	17
5.3.3 Member Function Documentation	17
5.3.3.1 makeCopy()	17
5.4 Tang::AstNodeInteger Class Reference	18
5.4.1 Detailed Description	20
5.4.2 Constructor & Destructor Documentation	20
5.4.2.1 AstNodeInteger()	20
5.4.3 Member Function Documentation	20
5.4.3.1 makeCopy()	20
5.5 Tang::AstNodeNegative Class Reference	21
5.5.1 Detailed Description	23
5.5.2 Constructor & Destructor Documentation	23
5.5.2.1 AstNodeNegative()	23
5.5.3 Member Function Documentation	23

5.5.3.1 makeCopy()	23
5.6 Tang::AstNodeSubtract Class Reference	24
5.6.1 Detailed Description	26
5.6.2 Constructor & Destructor Documentation	26
5.6.2.1 AstNodeSubtract()	26
5.6.3 Member Function Documentation	26
5.6.3.1 makeCopy()	26
5.7 Tang::ComputedExpression Class Reference	27
5.7.1 Detailed Description	27
5.7.2 Member Function Documentation	27
5.7.2.1 __add()	28
5.7.2.2 __negative()	28
5.7.2.3 __subtract()	28
5.7.2.4 dump()	29
5.7.2.5 is_equal() [1/2]	29
5.7.2.6 is_equal() [2/2]	29
5.7.2.7 makeCopy()	30
5.8 Tang::ComputedExpressionError Class Reference	30
5.8.1 Detailed Description	31
5.8.2 Constructor & Destructor Documentation	31
5.8.2.1 ComputedExpressionError()	31
5.8.3 Member Function Documentation	31
5.8.3.1 __add()	31
5.8.3.2 __negative()	33
5.8.3.3 __subtract()	33
5.8.3.4 dump()	33
5.8.3.5 is_equal() [1/2]	34
5.8.3.6 is_equal() [2/2]	34
5.8.3.7 makeCopy()	34
5.9 Tang::ComputedExpressionFloat Class Reference	35
5.9.1 Detailed Description	36
5.9.2 Constructor & Destructor Documentation	36
5.9.2.1 ComputedExpressionFloat()	36
5.9.3 Member Function Documentation	37
5.9.3.1 __add()	37
5.9.3.2 __negative()	37
5.9.3.3 __subtract()	37
5.9.3.4 dump()	38
5.9.3.5 is_equal() [1/2]	38
5.9.3.6 is_equal() [2/2]	38
5.9.3.7 makeCopy()	39
5.10 Tang::ComputedExpressionInteger Class Reference	40

5.10.1 Detailed Description	41
5.10.2 Constructor & Destructor Documentation	41
5.10.2.1 ComputedExpressionInteger()	41
5.10.3 Member Function Documentation	41
5.10.3.1 __add()	41
5.10.3.2 __negative()	42
5.10.3.3 __subtract()	42
5.10.3.4 dump()	42
5.10.3.5 is_equal() [1/2]	43
5.10.3.6 is_equal() [2/2]	43
5.10.3.7 makeCopy()	43
5.11 Tang::Error Class Reference	44
5.11.1 Detailed Description	46
5.11.2 Constructor & Destructor Documentation	46
5.11.2.1 Error() [1/2]	46
5.11.2.2 Error() [2/2]	46
5.12 Tang::GarbageCollected Class Reference	46
5.12.1 Detailed Description	48
5.12.2 Constructor & Destructor Documentation	48
5.12.2.1 GarbageCollected() [1/3]	48
5.12.2.2 GarbageCollected() [2/3]	48
5.12.2.3 ~GarbageCollected()	49
5.12.2.4 GarbageCollected() [3/3]	49
5.12.3 Member Function Documentation	49
5.12.3.1 make()	49
5.12.3.2 operator*()	50
5.12.3.3 operator+()	50
5.12.3.4 operator-() [1/2]	51
5.12.3.5 operator-() [2/2]	51
5.12.3.6 operator->()	52
5.12.3.7 operator=() [1/2]	52
5.12.3.8 operator=() [2/2]	53
5.12.3.9 operator==(1/2)	53
5.12.3.10 operator==(2/2)	54
5.12.4 Friends And Related Function Documentation	54
5.12.4.1 operator<<	54
5.13 Tang::location Class Reference	55
5.13.1 Detailed Description	56
5.14 Tang::position Class Reference	56
5.14.1 Detailed Description	57
5.15 Tang::Program Class Reference	58
5.15.1 Detailed Description	59

5.15.2 Member Enumeration Documentation	59
5.15.2.1 CodeType	59
5.15.3 Constructor & Destructor Documentation	59
5.15.3.1 Program()	59
5.15.4 Member Function Documentation	60
5.15.4.1 addBytecode()	60
5.15.4.2 dumpBytecode()	60
5.15.4.3 execute()	60
5.15.4.4 getAst()	61
5.15.4.5 getCode()	61
5.15.4.6 getResult()	61
5.16 Tang::SingletonObjectPool< T > Class Template Reference	61
5.16.1 Member Function Documentation	62
5.16.1.1 get()	62
5.16.1.2 getInstance()	62
5.16.1.3 recycle()	62
5.17 Tang::TangBase Class Reference	63
5.17.1 Detailed Description	63
5.17.2 Constructor & Destructor Documentation	63
5.17.2.1 TangBase()	63
5.17.3 Member Function Documentation	63
5.17.3.1 compileScript()	63
5.18 Tang::TangScanner Class Reference	64
5.18.1 Detailed Description	65
5.18.2 Constructor & Destructor Documentation	65
5.18.2.1 TangScanner()	65
5.18.3 Member Function Documentation	65
5.18.3.1 get_next_token()	65
6 File Documentation	67
6.1 build/generated/location.hh File Reference	67
6.1.1 Detailed Description	68
6.1.2 Function Documentation	68
6.1.2.1 operator<<() [1/2]	68
6.1.2.2 operator<<() [2/2]	69
6.2 include/astNode.hpp File Reference	69
6.2.1 Detailed Description	70
6.3 include/astNodeAdd.hpp File Reference	70
6.4 include/astNodeFloat.hpp File Reference	71
6.5 include/astNodeInteger.hpp File Reference	72
6.6 include/astNodeNegative.hpp File Reference	73
6.7 include/astNodeSubtract.hpp File Reference	74

6.8 include/computedExpression.hpp File Reference	75
6.9 include/computedExpressionError.hpp File Reference	76
6.10 include/computedExpressionFloat.hpp File Reference	77
6.11 include/computedExpressionInteger.hpp File Reference	78
6.12 include/error.hpp File Reference	78
6.12.1 Detailed Description	79
6.13 include/garbageCollected.hpp File Reference	79
6.14 include/macros.hpp File Reference	80
6.14.1 Detailed Description	80
6.14.2 Macro Definition Documentation	81
6.14.2.1 TANG_UNUSED	81
6.15 include/opcode.hpp File Reference	81
6.15.1 Detailed Description	81
6.15.2 Enumeration Type Documentation	81
6.15.2.1 Opcode	81
6.16 include/program.hpp File Reference	82
6.16.1 Detailed Description	83
6.17 include/singletonObjectPool.hpp File Reference	83
6.18 include/tang.hpp File Reference	84
6.18.1 Detailed Description	84
6.19 include/tangBase.hpp File Reference	84
6.19.1 Detailed Description	85
6.20 include/tangScanner.hpp File Reference	86
6.20.1 Detailed Description	87
6.21 src/astNode.cpp File Reference	87
6.22 src/astNodeAdd.cpp File Reference	87
6.23 src/astNodeFloat.cpp File Reference	88
6.24 src/astNodeInteger.cpp File Reference	88
6.25 src/astNodeNegative.cpp File Reference	89
6.26 src/astNodeSubtract.cpp File Reference	89
6.27 src/computedExpression.cpp File Reference	90
6.28 src/computedExpressionError.cpp File Reference	91
6.29 src/computedExpressionFloat.cpp File Reference	91
6.30 src/computedExpressionInteger.cpp File Reference	92
6.31 src/error.cpp File Reference	93
6.32 src/program-dumpBytecode.cpp File Reference	93
6.32.1 Macro Definition Documentation	94
6.32.1.1 DUMPPROGRAMCHECK	94
6.33 src/program-execute.cpp File Reference	94
6.33.1 Macro Definition Documentation	95
6.33.1.1 EXECUTEPROGRAMCHECK	95
6.33.1.2 STACKCHECK	95

6.34 src/program.cpp File Reference	96
6.35 src/tangBase.cpp File Reference	96
6.36 test/testSingletonObjectPool.cpp File Reference	97
Index	99

Chapter 1

Tang: A Template Language

1.1 Quick Description

Tang is a C++ Template Language. It takes the form of a library which may be included in other projects. It is under active development, and you can follow its progress here:

- [YouTube playlist](#)
- [GitHub repository](#)

1.2 Features

The following features are planned:

- Native support for Unicode/Utf-8 strings.
- Change from template to script mode using escape tags like PHP.
- Loosely typed, with Python-like indexing and slicing of containers.
- Syntax similar to C/C++/PHP.
- Code compiles to a custom Bytecode and is executed by the Tang VM.
- Fast and thread-safe.

1.3 License

MIT License

Copyright (c) 2022 Corey Pennycuff

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Chapter 2

Hierarchical Index

2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Tang::AstNode	9
Tang::AstNodeAdd	12
Tang::AstNodeFloat	15
Tang::AstNodeInteger	18
Tang::AstNodeNegative	21
Tang::AstNodeSubtract	24
Tang::ComputedExpression	27
Tang::ComputedExpressionError	30
Tang::ComputedExpressionFloat	35
Tang::ComputedExpressionInteger	40
Tang::Error	44
Tang::GarbageCollected	46
Tang::location	55
Tang::position	56
Tang::Program	58
Tang::SingletonObjectPool< T >	61
Tang::TangBase	63
TangTangFlexLexer	
Tang::TangScanner	64

Chapter 3

Class Index

3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

Tang::AstNode	Base class for representing nodes of an Abstract Syntax Tree (AST)	9
Tang::AstNodeAdd	An AstNode that represents a "+" expression	12
Tang::AstNodeFloat	An AstNode that represents an float literal	15
Tang::AstNodeInteger	An AstNode that represents an integer literal	18
Tang::AstNodeNegative	An AstNode that represents a unary negation	21
Tang::AstNodeSubtract	An AstNode that represents a "-" expression	24
Tang::ComputedExpression	Represents the result of a computation that has been executed	27
Tang::ComputedExpressionError	Represents a Runtime Error	30
Tang::ComputedExpressionFloat	Represents a Float that is the result of a computation	35
Tang::ComputedExpressionInteger	Represents an Integer that is the result of a computation	40
Tang::Error	Used to report any error of the system, whether a syntax (parsing) error or a runtime (execution) error	44
Tang::GarbageCollected	A container that acts as a resource-counting garbage collector for the specified type	46
Tang::location	Two points in a source file	55
Tang::position	A point in a source file	56
Tang::Program	Represents a compiled script or template that may be executed	58
Tang::SingletonObjectPool< T >	61
Tang::TangBase	The base class for the Tang programming language	63
Tang::TangScanner	The Flex lexer class for the main Tang language	64

Chapter 4

File Index

4.1 File List

Here is a list of all documented files with brief descriptions:

build/generated/location.hh	
Define the <code>Tang::location</code> class	67
include/astNode.hpp	
Define the <code>Tang::AstNode</code> and its associated/derivative classes	69
include/astNodeAdd.hpp	70
include/astNodeFloat.hpp	71
include/astNodeInteger.hpp	72
include/astNodeNegative.hpp	73
include/astNodeSubtract.hpp	74
include/computedExpression.hpp	75
include/computedExpressionError.hpp	76
include/computedExpressionFloat.hpp	77
include/computedExpressionInteger.hpp	78
include/error.hpp	
Define the <code>Tang::Error</code> class used to describe syntax and runtime errors	78
include/garbageCollected.hpp	79
include/macros.hpp	
Contains generic macros	80
include/opcode.hpp	
Declare the Opcodes used in the Bytecode representation of a program	81
include/program.hpp	
Define the <code>Tang::Program</code> class used to compile and execute source code	82
include/singletonObjectPool.hpp	83
include/tang.hpp	
Header file supplied for use by 3rd party code so that they can easily include all necessary headers	84
include/tangBase.hpp	
Defines the <code>Tang::TangBase</code> class used to interact with Tang	84
include/tangScanner.hpp	
Defines the <code>Tang::TangScanner</code> used to tokenize a Tang script	86
src/astNode.cpp	87
src/astNodeAdd.cpp	87
src/astNodeFloat.cpp	88
src/astNodeInteger.cpp	88
src/astNodeNegative.cpp	89

src/astNodeSubtract.cpp	89
src/computedExpression.cpp	90
src/computedExpressionError.cpp	91
src/computedExpressionFloat.cpp	91
src/computedExpressionInteger.cpp	92
src/error.cpp	93
src/program-dumpBytecode.cpp	93
src/program-execute.cpp	94
src/program.cpp	96
src/tangBase.cpp	96
test/testSingletonObjectPool.cpp	97

Chapter 5


Class Documentation

5.1 Tang::AstNode Class Reference


Base class for representing nodes of an Abstract Syntax Tree (AST).

```
#include <astNode.hpp>
```

Inheritance diagram for Tang::AstNode:

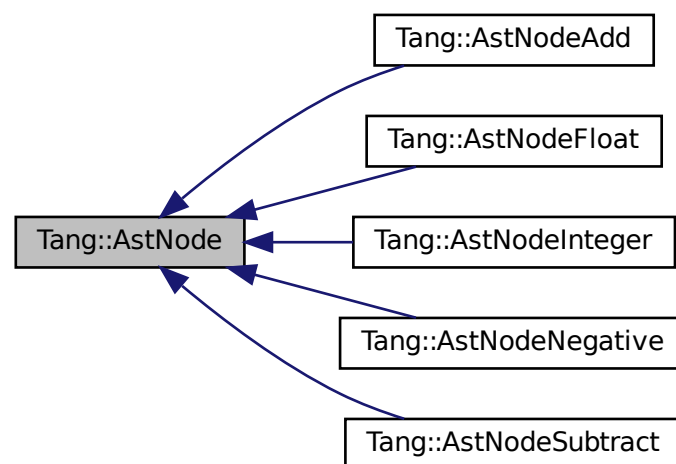

Collaboration diagram for Tang::AstNode:

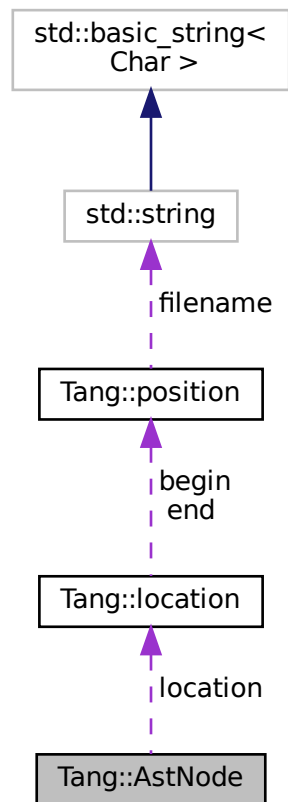

Public Member Functions

- virtual `~AstNode` ()
The object destructor.
- virtual `std::string dump` (std::string indent="") const
Return a string that describes the contents of the node.
- virtual void `compile` (Tang::Program &program) const
Compile the ast of the provided Tang::Program.
- virtual `AstNode * makeCopy` () const
Provide a copy of the AstNode (recursively, if appropriate).

Protected Member Functions

- `AstNode` (Tang::location loc)
The generic constructor.

Protected Attributes

- [Tang::location](#) `location`

The location associated with this node.

5.1.1 Detailed Description

Base class for representing nodes of an Abstract Syntax Tree (AST).

There will be *many* derived classes, each one conveying the syntactic meaning of the code that it represents.

5.1.2 Constructor & Destructor Documentation

5.1.2.1 AstNode()

```
Tang::AstNode::AstNode (
    Tang::location loc ) [inline], [protected]
```

The generic constructor.

It should never be called on its own.

Parameters

<code>loc</code>	The location associated with this node.
------------------	---

5.1.3 Member Function Documentation

5.1.3.1 makeCopy()

```
AstNode * AstNode::makeCopy ( ) const [virtual]
```

Provide a copy of the [AstNode](#) (recursively, if appropriate).

Returns

A pointer to a new [AstNode](#) that is a copy of the current [AstNode](#).

Reimplemented in [Tang::AstNodeSubtract](#), [Tang::AstNodeNegative](#), [Tang::AstNodeInteger](#), [Tang::AstNodeFloat](#), and [Tang::AstNodeAdd](#).

The documentation for this class was generated from the following files:


- `include/astNode.hpp`
- `src/astNode.cpp`

5.2 Tang::AstNodeAdd Class Reference


An [AstNode](#) that represents a "+" expression.

```
#include <astNodeAdd.hpp>
```

Inheritance diagram for Tang::AstNodeAdd:



Collaboration diagram for Tang::AstNodeAdd:

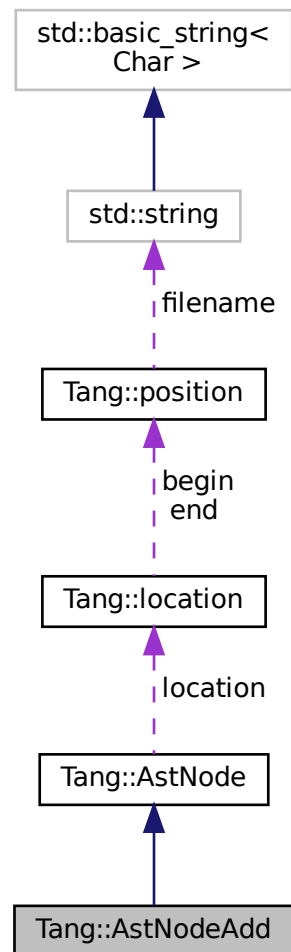

Public Member Functions

- `AstNodeAdd` (`AstNode` *lhs, `AstNode` *rhs, `Tang::location` loc)
The constructor.
- virtual `std::string` `dump` (`std::string` indent="") const override
Return a string that describes the contents of the node.
- virtual void `compile` (`Tang::Program` &program) const override
Compile the ast of the provided `Tang::Program`.
- virtual `AstNode` * `makeCopy` () const override
Provide a copy of the `AstNode` (recursively, if appropriate).

Protected Attributes

- `Tang::location` location
The location associated with this node.

5.2.1 Detailed Description

An [AstNode](#) that represents a "+" expression.

5.2.2 Constructor & Destructor Documentation

5.2.2.1 AstNodeAdd()

```
Tang::AstNodeAdd::AstNodeAdd (
    AstNode * lhs,
    AstNode * rhs,
    Tang::location loc ) [inline]
```

The constructor.

Parameters

<i>lhs</i>	The left hand side expression.
<i>rhs</i>	The right hand side expression.
<i>loc</i>	The location associated with the expression. @location The location associated with this node.

5.2.3 Member Function Documentation

5.2.3.1 makeCopy()

```
AstNode * AstNodeAdd::makeCopy ( ) const [override], [virtual]
```

Provide a copy of the [AstNode](#) (recursively, if appropriate).

Returns

A pointer to a new [AstNode](#) that is a copy of the current [AstNode](#).

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- include/[astNodeAdd.hpp](#)
- src/[astNodeAdd.cpp](#)

5.3 Tang::AstNodeFloat Class Reference


An [AstNode](#) that represents an float literal.

```
#include <astNodeFloat.hpp>
```

Inheritance diagram for Tang::AstNodeFloat:

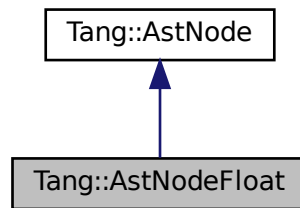

Collaboration diagram for Tang::AstNodeFloat:

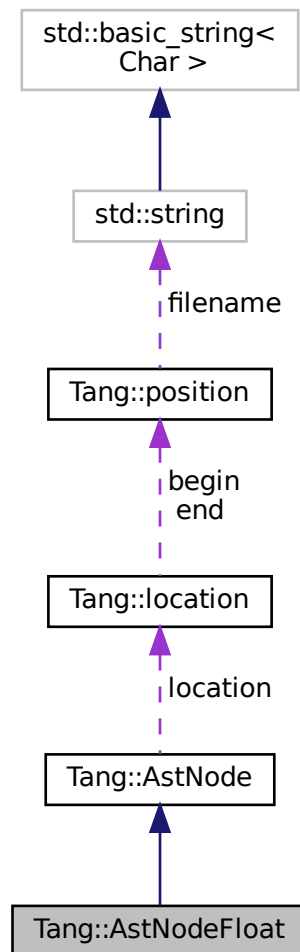

Public Member Functions

- [AstNodeFloat](#) (double number, [Tang::location](#) loc)
The constructor.
- virtual std::string [dump](#) (std::string indent="") const override
Return a string that describes the contents of the node.
- virtual void [compile](#) ([Tang::Program](#) &program) const override
Compile the ast of the provided [Tang::Program](#).
- virtual [AstNode](#) * [makeCopy](#) () const override
Provide a copy of the [AstNode](#) (recursively, if appropriate).

Protected Attributes

- [Tang::location](#) location
The location associated with this node.

5.3.1 Detailed Description

An [AstNode](#) that represents an float literal.

Integers are represented by the `long double` type, and so are limited in range by that of the underlying type.

5.3.2 Constructor & Destructor Documentation

5.3.2.1 AstNodeFloat()

```
Tang::AstNodeFloat::AstNodeFloat (
    double number,
    Tang::location loc ) [inline]
```

The constructor.

Parameters

<i>number</i>	The number to represent.
<i>loc</i>	The location associated with the expression. @location The location associated with this node.

5.3.3 Member Function Documentation

5.3.3.1 makeCopy()

```
AstNode * AstNodeFloat::makeCopy ( ) const [override], [virtual]
```

Provide a copy of the [AstNode](#) (recursively, if appropriate).

Returns

A pointer to a new [AstNode](#) that is a copy of the current [AstNode](#).

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- include/[astNodeFloat.hpp](#)
- src/[astNodeFloat.cpp](#)

5.4 Tang::AstNodeInteger Class Reference


An [AstNode](#) that represents an integer literal.

```
#include <astNodeInteger.hpp>
```

Inheritance diagram for Tang::AstNodeInteger:

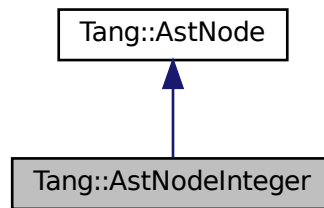

Collaboration diagram for Tang::AstNodeInteger:

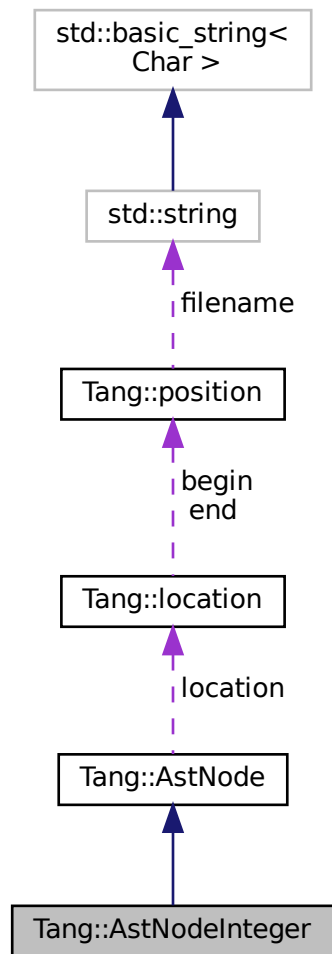

Public Member Functions

- [AstNodeInteger](#) (int64_t number, [Tang::location](#) loc)
The constructor.
- virtual std::string [dump](#) (std::string indent="") const override
Return a string that describes the contents of the node.
- virtual void [compile](#) ([Tang::Program](#) &program) const override
Compile the ast of the provided [Tang::Program](#).
- virtual [AstNode](#) * [makeCopy](#) () const override
Provide a copy of the [AstNode](#) (recursively, if appropriate).

Protected Attributes

- [Tang::location](#) location
The location associated with this node.

5.4.1 Detailed Description

An [AstNode](#) that represents an integer literal.

Integers are represented by the `int64_t` type, and so are limited in range by that of the underlying type.

5.4.2 Constructor & Destructor Documentation

5.4.2.1 AstNodeInteger()

```
Tang::AstNodeInteger::AstNodeInteger (
    int64_t number,
    Tang::location loc ) [inline]
```

The constructor.

Parameters

<i>number</i>	The number to represent.
<i>loc</i>	The location associated with the expression. @location The location associated with this node.

5.4.3 Member Function Documentation

5.4.3.1 makeCopy()

```
AstNode * AstNodeInteger::makeCopy ( ) const [override], [virtual]
```

Provide a copy of the [AstNode](#) (recursively, if appropriate).

Returns

A pointer to a new [AstNode](#) that is a copy of the current [AstNode](#).

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- include/[astNodeInteger.hpp](#)
- src/[astNodeInteger.cpp](#)

5.5 Tang::AstNodeNegative Class Reference


An [AstNode](#) that represents a unary negation.

```
#include <astNodeNegative.hpp>
```

Inheritance diagram for Tang::AstNodeNegative:

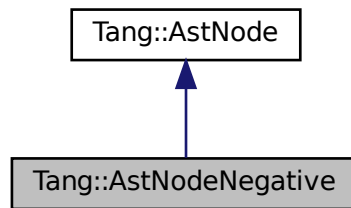

Collaboration diagram for Tang::AstNodeNegative:

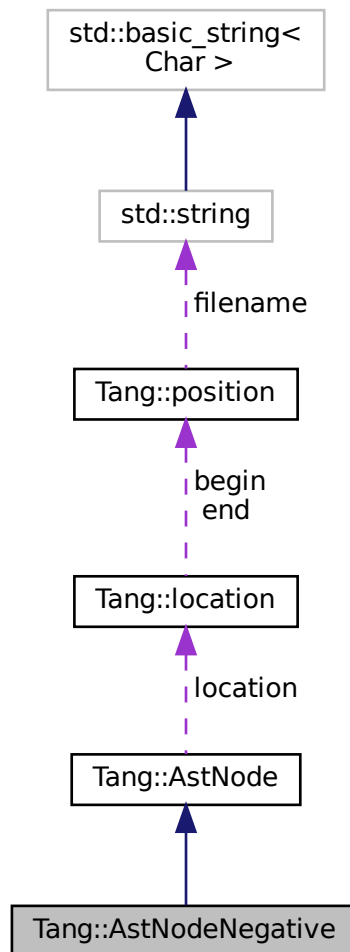

Public Member Functions

- [AstNodeNegative](#) ([AstNode](#) *operand, [Tang::location](#) loc)
The constructor.
- virtual [std::string dump](#) ([std::string](#) indent="") const override
Return a string that describes the contents of the node.
- virtual void [compile](#) ([Tang::Program](#) &program) const override
Compile the ast of the provided [Tang::Program](#).
- virtual [AstNode](#) * [makeCopy](#) () const override
Provide a copy of the [AstNode](#) (recursively, if appropriate).

Protected Attributes

- [Tang::location](#) location
The location associated with this node.

5.5.1 Detailed Description

An [AstNode](#) that represents a unary negation.

5.5.2 Constructor & Destructor Documentation

5.5.2.1 AstNodeNegative()

```
Tang::AstNodeNegative::AstNodeNegative (
    AstNode * operand,
    Tang::location loc ) [inline]
```

The constructor.

Parameters

<i>operand</i>	The expression to negate.
<i>loc</i>	The location associated with the expression.

5.5.3 Member Function Documentation

5.5.3.1 makeCopy()

```
AstNode * AstNodeNegative::makeCopy ( ) const [override], [virtual]
```

Provide a copy of the [AstNode](#) (recursively, if appropriate).

Returns

A pointer to a new [AstNode](#) that is a copy of the current [AstNode](#).

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- [include/astNodeNegative.hpp](#)
- [src/astNodeNegative.cpp](#)

5.6 Tang::AstNodeSubtract Class Reference


An [AstNode](#) that represents a "-" expression.

```
#include <astNodeSubtract.hpp>
```

Inheritance diagram for Tang::AstNodeSubtract:



Collaboration diagram for Tang::AstNodeSubtract:

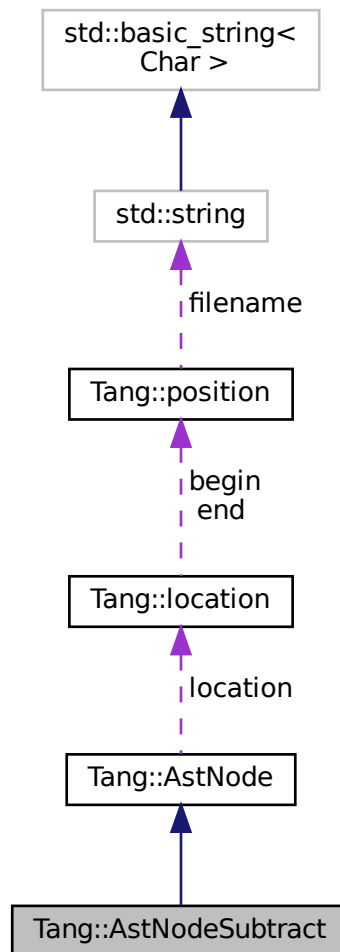

Public Member Functions

- [AstNodeSubtract](#) ([AstNode](#) *lhs, [AstNode](#) *rhs, [Tang::location](#) loc)
The constructor.
- virtual [std::string](#) [dump](#) ([std::string](#) indent="") const override
Return a string that describes the contents of the node.
- virtual void [compile](#) ([Tang::Program](#) &program) const override
Compile the ast of the provided [Tang::Program](#).
- virtual [AstNode](#) * [makeCopy](#) () const override
Provide a copy of the [AstNode](#) (recursively, if appropriate).

Protected Attributes

- [Tang::location](#) location
The location associated with this node.

5.6.1 Detailed Description

An [AstNode](#) that represents a "-" expression.

5.6.2 Constructor & Destructor Documentation

5.6.2.1 AstNodeSubtract()

```
Tang::AstNodeSubtract::AstNodeSubtract (
    AstNode * lhs,
    AstNode * rhs,
    Tang::location loc ) [inline]
```

The constructor.

Parameters

<i>lhs</i>	The left hand side expression.
<i>rhs</i>	The right hand side expression.
<i>loc</i>	The location associated with the expression. @location The location associated with this node.

5.6.3 Member Function Documentation

5.6.3.1 makeCopy()

```
AstNode * AstNodeSubtract::makeCopy ( ) const [override], [virtual]
```

Provide a copy of the [AstNode](#) (recursively, if appropriate).

Returns

A pointer to a new [AstNode](#) that is a copy of the current [AstNode](#).

Reimplemented from [Tang::AstNode](#).

The documentation for this class was generated from the following files:


- include/[astNodeSubtract.hpp](#)
- src/[astNodeSubtract.cpp](#)

5.7 Tang::ComputedExpression Class Reference

Represents the result of a computation that has been executed.

```
#include <computedExpression.hpp>
```

Inheritance diagram for Tang::ComputedExpression:

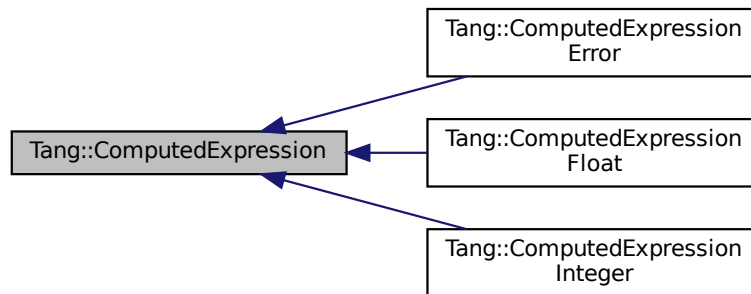

Public Member Functions

- virtual [~ComputedExpression](#) ()
The object destructor.
- virtual std::string [dump](#) () const
Output the contents of the [ComputedExpression](#) as a string.
- virtual [ComputedExpression](#) * [makeCopy](#) () const
Make a copy of the [ComputedExpression](#) (recursively, if appropriate).
- virtual bool [is_equal](#) (const int &val) const
Check whether or not the computed expression is equal to another value.
- virtual bool [is_equal](#) (const double &val) const
Check whether or not the computed expression is equal to another value.
- virtual [GarbageCollected](#) [__add](#) (const [GarbageCollected](#) &rhs) const
Compute the result of adding this value and the supplied value.
- virtual [GarbageCollected](#) [__subtract](#) (const [GarbageCollected](#) &rhs) const
Compute the result of subtracting this value and the supplied value.
- virtual [GarbageCollected](#) [__negative](#) () const
Compute the result of negating this value.

5.7.1 Detailed Description

Represents the result of a computation that has been executed.

5.7.2 Member Function Documentation

5.7.2.1 `__add()`

```
GarbageCollected ComputedExpression::__add (
    const GarbageCollected & rhs ) const [virtual]
```

Compute the result of adding this value and the supplied value.

Parameters

<i>rhs</i>	The GarbageCollected value to add to this.
------------	--

Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

5.7.2.2 `__negative()`

```
GarbageCollected ComputedExpression::__negative ( ) const [virtual]
```

Compute the result of negating this value.

Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

5.7.2.3 `__subtract()`

```
GarbageCollected ComputedExpression::__subtract (
    const GarbageCollected & rhs ) const [virtual]
```

Compute the result of subtracting this value and the supplied value.

Parameters

<i>rhs</i>	The GarbageCollected value to subtract from this.
------------	---

Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

5.7.2.4 dump()

```
string ComputedExpression::dump ( ) const [virtual]
```

Output the contents of the [ComputedExpression](#) as a string.

Returns

A string representation of the computed expression.

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

5.7.2.5 is_equal() [1/2]

```
virtual bool Tang::ComputedExpression::is_equal (
    const double & val ) const [virtual]
```

Check whether or not the computed expression is equal to another value.

Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

5.7.2.6 is_equal() [2/2]

```
virtual bool Tang::ComputedExpression::is_equal (
    const int & val ) const [virtual]
```

Check whether or not the computed expression is equal to another value.

Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

5.7.2.7 makeCopy()

```
ComputedExpression * ComputedExpression::makeCopy ( ) const [virtual]
```

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

Returns

A pointer to the new [ComputedExpression](#).

Reimplemented in [Tang::ComputedExpressionInteger](#), [Tang::ComputedExpressionFloat](#), and [Tang::ComputedExpressionError](#).

The documentation for this class was generated from the following files:


- [include/computedExpression.hpp](#)
- [src/computedExpression.cpp](#)

5.8 Tang::ComputedExpressionError Class Reference


Represents a Runtime [Error](#).

```
#include <computedExpressionError.hpp>
```

Inheritance diagram for Tang::ComputedExpressionError:

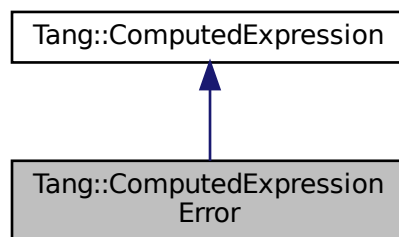

Collaboration diagram for Tang::ComputedExpressionError:

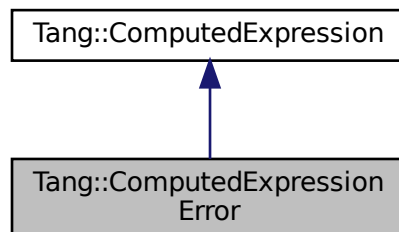

Public Member Functions

- [ComputedExpressionError](#) ([Tang::Error](#) error)
Construct a Runtime [Error](#).
- virtual std::string [dump](#) () const override
Output the contents of the [ComputedExpression](#) as a string.
- [ComputedExpression](#) * [makeCopy](#) () const override
Make a copy of the [ComputedExpression](#) (recursively, if appropriate).
- virtual bool [is_equal](#) (const int &val) const
Check whether or not the computed expression is equal to another value.
- virtual bool [is_equal](#) (const double &val) const
Check whether or not the computed expression is equal to another value.
- virtual [GarbageCollected](#) [__add](#) (const [GarbageCollected](#) &rhs) const
Compute the result of adding this value and the supplied value.
- virtual [GarbageCollected](#) [__subtract](#) (const [GarbageCollected](#) &rhs) const
Compute the result of subtracting this value and the supplied value.
- virtual [GarbageCollected](#) [__negative](#) () const
Compute the result of negating this value.

5.8.1 Detailed Description

Represents a Runtime [Error](#).

5.8.2 Constructor & Destructor Documentation

5.8.2.1 ComputedExpressionError()

```
ComputedExpressionError::ComputedExpressionError (
    Tang::Error error )
```

Construct a Runtime [Error](#).

Parameters

<i>error</i>	The Tang::Error object.
--------------	---

5.8.3 Member Function Documentation

5.8.3.1 __add()

```
GarbageCollected ComputedExpression::__add (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of adding this value and the supplied value.

Parameters

<i>rhs</i>	The GarbageCollected value to add to this.
------------	--

Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

5.8.3.2 __negative()

```
GarbageCollected ComputedExpression::__negative ( ) const [virtual], [inherited]
```

Compute the result of negating this value.

Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

5.8.3.3 __subtract()

```
GarbageCollected ComputedExpression::__subtract (
    const GarbageCollected & rhs ) const [virtual], [inherited]
```

Compute the result of subtracting this value and the supplied value.

Parameters

<i>rhs</i>	The GarbageCollected value to subtract from this.
------------	---

Returns

The result of the operation.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

5.8.3.4 dump()

```
std::string ComputedExpressionError::dump ( ) const [override], [virtual]
```

Output the contents of the [ComputedExpression](#) as a string.

Returns

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

5.8.3.5 is_equal() [1/2]

```
virtual bool Tang::ComputedExpression::is_equal (
    const double & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

5.8.3.6 is_equal() [2/2]

```
virtual bool Tang::ComputedExpression::is_equal (
    const int & val ) const [virtual], [inherited]
```

Check whether or not the computed expression is equal to another value.

Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

Returns

True if equal, false if not.

Reimplemented in [Tang::ComputedExpressionInteger](#), and [Tang::ComputedExpressionFloat](#).

5.8.3.7 makeCopy()

```
ComputedExpression * ComputedExpressionError::makeCopy ( ) const [override], [virtual]
```


Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

Returns

A pointer to the new [ComputedExpression](#).

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



The documentation for this class was generated from the following files:


- [include/computedExpressionError.hpp](#)
- [src/computedExpressionError.cpp](#)

5.9 Tang::ComputedExpressionFloat Class Reference


Represents a Float that is the result of a computation.

```
#include <computedExpressionFloat.hpp>
```

Inheritance diagram for Tang::ComputedExpressionFloat:

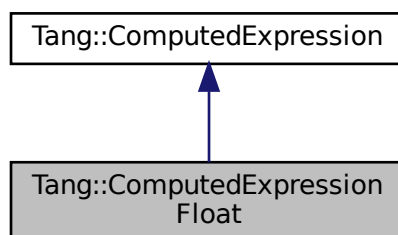

Collaboration diagram for Tang::ComputedExpressionFloat:

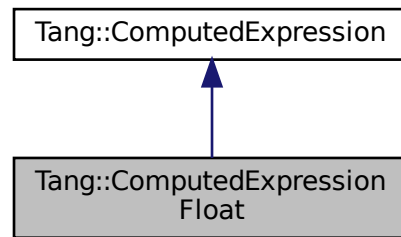

Public Member Functions

- [ComputedExpressionFloat](#) (double val)
Construct a Float result.
- virtual std::string [dump](#) () const override
Output the contents of the [ComputedExpression](#) as a string.
- [ComputedExpression](#) * [makeCopy](#) () const override
Make a copy of the [ComputedExpression](#) (recursively, if appropriate).
- virtual bool [is_equal](#) (const int &val) const override
Check whether or not the computed expression is equal to another value.
- virtual bool [is_equal](#) (const double &val) const override
Check whether or not the computed expression is equal to another value.
- virtual [GarbageCollected](#) [__add](#) (const [GarbageCollected](#) &rhs) const override
Compute the result of adding this value and the supplied value.
- virtual [GarbageCollected](#) [__subtract](#) (const [GarbageCollected](#) &rhs) const override
Compute the result of subtracting this value and the supplied value.
- virtual [GarbageCollected](#) [__negative](#) () const override
Compute the result of negating this value.

Friends

- class [ComputedExpressionInteger](#)

5.9.1 Detailed Description

Represents a Float that is the result of a computation.

5.9.2 Constructor & Destructor Documentation

5.9.2.1 ComputedExpressionFloat()

```
ComputedExpressionFloat::ComputedExpressionFloat (
    double val )
```

Construct a Float result.

Parameters

<i>val</i>	The float value.
------------	------------------

5.9.3 Member Function Documentation

5.9.3.1 __add()

```
GarbageCollected ComputedExpressionFloat::__add (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of adding this value and the supplied value.

Parameters

<i>rhs</i>	The GarbageCollected value to add to this.
------------	--

Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

5.9.3.2 __negative()

```
GarbageCollected ComputedExpressionFloat::__negative ( ) const [override], [virtual]
```

Compute the result of negating this value.

Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

5.9.3.3 __subtract()

```
GarbageCollected ComputedExpressionFloat::__subtract (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of subtracting this value and the supplied value.

Parameters

<i>rhs</i>	The GarbageCollected value to subtract from this.
------------	---

Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

5.9.3.4 dump()

```
string ComputedExpressionFloat::dump ( ) const [override], [virtual]
```

Output the contents of the [ComputedExpression](#) as a string.

Returns

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

5.9.3.5 is_equal() [1/2]

```
bool ComputedExpressionFloat::is_equal (
    const double & val ) const [override], [virtual]
```

Check whether or not the computed expression is equal to another value.

Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

Returns

True if equal, false if not.

Reimplemented from [Tang::ComputedExpression](#).

5.9.3.6 is_equal() [2/2]

```
bool ComputedExpressionFloat::is_equal (
    const int & val ) const [override], [virtual]
```

Check whether or not the computed expression is equal to another value.

Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

Returns

True if equal, false if not.

Reimplemented from [Tang::ComputedExpression](#).

5.9.3.7 makeCopy()

```
ComputedExpression * ComputedExpressionFloat::makeCopy ( ) const [override], [virtual]
```


Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

Returns

A pointer to the new [ComputedExpression](#).

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



The documentation for this class was generated from the following files:


- [include/computedExpressionFloat.hpp](#)
- [src/computedExpressionFloat.cpp](#)

5.10 Tang::ComputedExpressionInteger Class Reference


Represents an Integer that is the result of a computation.

```
#include <computedExpressionInteger.hpp>
```

Inheritance diagram for Tang::ComputedExpressionInteger:

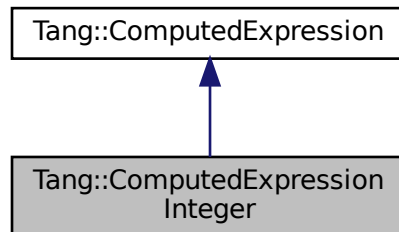

Collaboration diagram for Tang::ComputedExpressionInteger:

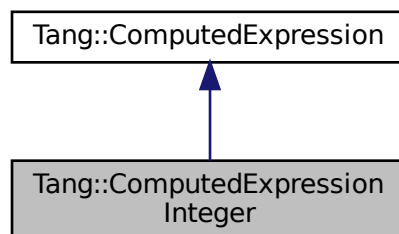

Public Member Functions

- [ComputedExpressionInteger](#) (int64_t val)
Construct an Integer result.
- virtual std::string [dump](#) () const override
Output the contents of the [ComputedExpression](#) as a string.
- [ComputedExpression](#) * [makeCopy](#) () const override
Make a copy of the [ComputedExpression](#) (recursively, if appropriate).
- virtual bool [is_equal](#) (const int &val) const override
Check whether or not the computed expression is equal to another value.
- virtual bool [is_equal](#) (const double &val) const override
Check whether or not the computed expression is equal to another value.

- virtual [GarbageCollected](#) `__add` (const [GarbageCollected](#) &rhs) const override
Compute the result of adding this value and the supplied value.
- virtual [GarbageCollected](#) `__subtract` (const [GarbageCollected](#) &rhs) const override
Compute the result of subtracting this value and the supplied value.
- virtual [GarbageCollected](#) `__negative` () const override
Compute the result of negating this value.

Friends

- class **ComputedExpressionFloat**

5.10.1 Detailed Description

Represents an Integer that is the result of a computation.

5.10.2 Constructor & Destructor Documentation

5.10.2.1 ComputedExpressionInteger()

```
ComputedExpressionInteger::ComputedExpressionInteger (
    int64_t val )
```

Construct an Integer result.

Parameters

<i>val</i>	The integer value.
------------	--------------------

5.10.3 Member Function Documentation

5.10.3.1 __add()

```
GarbageCollected ComputedExpressionInteger::__add (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of adding this value and the supplied value.

Parameters

<i>rhs</i>	The GarbageCollected value to add to this.
------------	--

Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

5.10.3.2 `__negative()`

```
GarbageCollected ComputedExpressionInteger::__negative ( ) const [override], [virtual]
```

Compute the result of negating this value.

Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

5.10.3.3 `__subtract()`

```
GarbageCollected ComputedExpressionInteger::__subtract (
    const GarbageCollected & rhs ) const [override], [virtual]
```

Compute the result of subtracting this value and the supplied value.

Parameters

<i>rhs</i>	The GarbageCollected value to subtract from this.
------------	---

Returns

The result of the operation.

Reimplemented from [Tang::ComputedExpression](#).

5.10.3.4 `dump()`

```
string ComputedExpressionInteger::dump ( ) const [override], [virtual]
```

Output the contents of the [ComputedExpression](#) as a string.

Returns

A string representation of the computed expression.

Reimplemented from [Tang::ComputedExpression](#).

5.10.3.5 is_equal() [1/2]

```
bool ComputedExpressionInteger::is_equal (
    const double & val ) const [override], [virtual]
```

Check whether or not the computed expression is equal to another value.

Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

Returns

True if equal, false if not.

Reimplemented from [Tang::ComputedExpression](#).

5.10.3.6 is_equal() [2/2]

```
bool ComputedExpressionInteger::is_equal (
    const int & val ) const [override], [virtual]
```

Check whether or not the computed expression is equal to another value.

Parameters

<i>val</i>	The value to compare against.
------------	-------------------------------

Returns

True if equal, false if not.

Reimplemented from [Tang::ComputedExpression](#).

5.10.3.7 makeCopy()

```
ComputedExpression * ComputedExpressionInteger::makeCopy ( ) const [override], [virtual]
```

Make a copy of the [ComputedExpression](#) (recursively, if appropriate).

Returns

A pointer to the new [ComputedExpression](#).

Reimplemented from [Tang::ComputedExpression](#).

Here is the call graph for this function:



The documentation for this class was generated from the following files:


- [include/computedExpressionInteger.hpp](#)
- [src/computedExpressionInteger.cpp](#)

5.11 Tang::Error Class Reference

The [Error](#) class is used to report any error of the system, whether a syntax (parsing) error or a runtime (execution) error.

```
#include <error.hpp>
```

Collaboration diagram for Tang::Error:

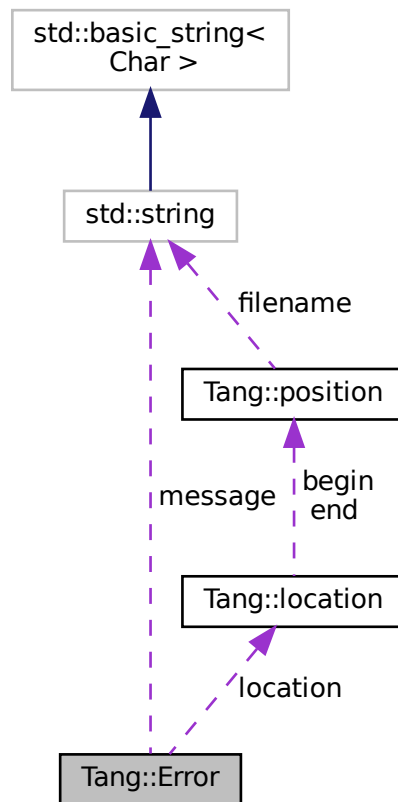

Public Member Functions

- [Error](#) ()
Creates an empty error message.
- [Error](#) (std::string [message](#))
Creates an error message using the supplied error string and location.
- [Error](#) (std::string [message](#), [Tang::location](#) [location](#))
Creates an error message using the supplied error string and location.

Public Attributes

- std::string [message](#)
The error message as a string.
- [Tang::location](#) [location](#)
The location of the error.

5.11.1 Detailed Description

The [Error](#) class is used to report any error of the system, whether a syntax (parsing) error or a runtime (execution) error.

5.11.2 Constructor & Destructor Documentation

5.11.2.1 Error() [1/2]

```
Tang::Error::Error (
    std::string message ) [inline]
```

Creates an error message using the supplied error string and location.

Parameters

<i>message</i>	The error message as a string.
----------------	--------------------------------

5.11.2.2 Error() [2/2]

```
Tang::Error::Error (
    std::string message,
    Tang::location location ) [inline]
```

Creates an error message using the supplied error string and location.

Parameters

<i>message</i>	The error message as a string.
<i>location</i>	The location of the error.

The documentation for this class was generated from the following files:


- [include/error.hpp](#)
- [src/error.cpp](#)

5.12 Tang::GarbageCollected Class Reference

A container that acts as a resource-counting garbage collector for the specified type.

```
#include <garbageCollected.hpp>
```

Collaboration diagram for Tang::GarbageCollected:

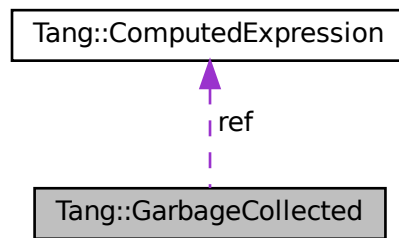

Public Member Functions

- `GarbageCollected` (const `GarbageCollected` &other)
Copy Constructor.
- `GarbageCollected` (`GarbageCollected` &&other)
Move Constructor.
- `GarbageCollected` & `operator=` (const `GarbageCollected` &other)
Copy Assignment.
- `GarbageCollected` & `operator=` (`GarbageCollected` &&other)
Move Assignment.
- `~GarbageCollected` ()
Destructor.
- `ComputedExpression` * `operator->` () const
Access the tracked object as a pointer.
- `ComputedExpression` & `operator*` () const
Access the tracked object.
- bool `operator==` (const int &val) const
Compare the `GarbageCollected` tracked object with a supplied value.
- bool `operator==` (const double &val) const
Compare the `GarbageCollected` tracked object with a supplied value.
- `GarbageCollected` `operator+` (const `GarbageCollected` &rhs) const
Perform an addition between two `GarbageCollected` values.
- `GarbageCollected` `operator-` (const `GarbageCollected` &rhs) const
Perform a subtraction between two `GarbageCollected` values.
- `GarbageCollected` `operator-` () const
Perform a negation on the `GarbageCollected` value.

Static Public Member Functions

- template<class T , typename... Args>
static `GarbageCollected` `make` (Args... args)
Creates a garbage-collected object of the specified type.

Protected Member Functions

- [GarbageCollected](#) ()
Constructs a garbage-collected object of the specified type.

Protected Attributes

- `size_t * count`
The count of references to the tracked object.
- `ComputedExpression * ref`
A reference to the tracked object.
- `std::function< void(void)> recycle`
A cleanup function to recycle the object.

Friends

- `std::ostream & operator<< (std::ostream &out, const GarbageCollected &gc)`
Add friendly output.

5.12.1 Detailed Description

A container that acts as a resource-counting garbage collector for the specified type.

Uses the [SingletonObjectPool](#) to created and recycle object memory. The container is not thread-safe.

5.12.2 Constructor & Destructor Documentation

5.12.2.1 [GarbageCollected\(\)](#) [1/3]

```
Tang::GarbageCollected::GarbageCollected (
    const GarbageCollected & other ) [inline]
```

Copy Constructor.

Parameters

<i>The</i>	other GarbageCollected object to copy.
------------	--

5.12.2.2 [GarbageCollected\(\)](#) [2/3]

```
Tang::GarbageCollected::GarbageCollected (
    GarbageCollected && other ) [inline]
```


Move Constructor.

Parameters

<i>The</i>	other GarbageCollected object to move.
------------	--

5.12.2.3 ~GarbageCollected()

```
Tang::GarbageCollected::~~GarbageCollected ( ) [inline]
```

Destructor.

Clean up the tracked object, if appropriate.

5.12.2.4 GarbageCollected() [3/3]

```
Tang::GarbageCollected::GarbageCollected ( ) [inline], [protected]
```

Constructs a garbage-collected object of the specified type.

It is private so that a [GarbageCollected](#) object can only be created using the [GarbageCollected::make\(\)](#) function.

Parameters

<i>variable</i>	The arguments to pass to the constructor of the specified type.
-----------------	---

5.12.3 Member Function Documentation

5.12.3.1 make()

```
template<class T , typename... Args>
static GarbageCollected Tang::GarbageCollected::make (
    Args... args ) [inline], [static]
```

Creates a garbage-collected object of the specified type.

Parameters

<i>variable</i>	The arguments to pass to the constructor of the specified type.
-----------------	---

Returns

A [GarbageCollected](#) object.

Here is the call graph for this function:

**5.12.3.2 operator*()**

```
ComputedExpression& Tang::GarbageCollected::operator* ( ) const [inline]
```

Access the tracked object.

Returns

A reference to the tracked object.

5.12.3.3 operator+()

```
GarbageCollected GarbageCollected::operator+ (
    const GarbageCollected & rhs ) const
```

Perform an addition between two [GarbageCollected](#) values.


Parameters

<i>rhs</i>	The right hand side operand.
------------	------------------------------

Returns

The result of the operation.

Here is the call graph for this function:

**5.12.3.4 operator-() [1/2]**


```
GarbageCollected GarbageCollected::operator- ( ) const
```

Perform a negation on the `GarbageCollected` value.

Returns

The result of the operation.

Here is the call graph for this function:

**5.12.3.5 operator-() [2/2]**

```
GarbageCollected GarbageCollected::operator- (
    const GarbageCollected & rhs ) const
```

Perform a subtraction between two `GarbageCollected` values.


Parameters

<i>rhs</i>	The right hand side operand.
------------	------------------------------

Returns

The result of the operation.

Here is the call graph for this function:



5.12.3.6 operator->()

```
ComputedExpression* Tang::GarbageCollected::operator-> ( ) const [inline]
```

Access the tracked object as a pointer.

Returns

A pointer to the tracked object.

5.12.3.7 operator=() [1/2]


```
GarbageCollected& Tang::GarbageCollected::operator= (
    const GarbageCollected & other ) [inline]
```

Copy Assignment.

Parameters

<i>The</i>	other GarbageCollected object.
------------	--

Here is the call graph for this function:



5.12.3.8 operator=() [2/2]


```
GarbageCollected& Tang::GarbageCollected::operator= (
    GarbageCollected && other ) [inline]
```

Move Assignment.

Parameters

<i>The</i>	other GarbageCollected object.
------------	--

Here is the call graph for this function:



5.12.3.9 operator==() [1/2]

```
bool GarbageCollected::operator==(
    const double & val ) const
```

Compare the [GarbageCollected](#) tracked object with a supplied value.

Parameters

<i>val</i>	The value to compare the tracked object against.
------------	--

Returns

True if they are equal, false otherwise.

5.12.3.10 operator==() [2/2]

```
bool GarbageCollected::operator== (
    const int & val ) const
```

Compare the [GarbageCollected](#) tracked object with a supplied value.

Parameters

<i>val</i>	The value to compare the tracked object against.
------------	--

Returns

True if they are equal, false otherwise.

5.12.4 Friends And Related Function Documentation**5.12.4.1 operator<<**

```
std::ostream& operator<< (
    std::ostream & out,
    const GarbageCollected & gc ) [friend]
```

Add friendly output.

Parameters

<i>out</i>	The output stream.
<i>gc</i>	The GarbageCollected value.

Returns

The output stream.

The documentation for this class was generated from the following files:


- [include/garbageCollected.hpp](#)
- [src/garbageCollected.cpp](#)

5.13 Tang::location Class Reference

Two points in a source file.

```
#include <location.hh>
```

Collaboration diagram for Tang::location:

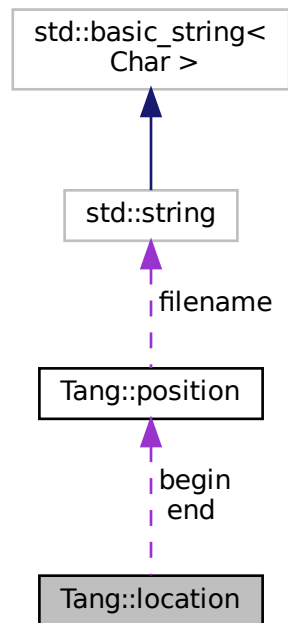

Public Types

- typedef `position::filename_type filename_type`
Type for file name.
- typedef `position::counter_type counter_type`
Type for line and column numbers.

Public Member Functions

- `location` (const `position` &b, const `position` &e)
Construct a location from b to e.
- `location` (const `position` &p=`position`())
Construct a 0-width location in p.
- `location` (`filename_type` *f, `counter_type` l=1, `counter_type` c=1)
Construct a 0-width location in f, l, c.
- void `initialize` (`filename_type` *f=((void *) 0), `counter_type` l=1, `counter_type` c=1)
Initialization.

Line and Column related manipulators

- void `step` ()
Reset initial location to final location.
- void `columns` (`counter_type` count=1)
Extend the current location to the COUNT next columns.
- void `lines` (`counter_type` count=1)
Extend the current location to the COUNT next lines.

Public Attributes

- `position begin`
Beginning of the located region.
- `position end`
End of the located region.

5.13.1 Detailed Description

Two points in a source file.

The documentation for this class was generated from the following file:


- build/generated/[location.hh](#)

5.14 Tang::position Class Reference

A point in a source file.

```
#include <location.hh>
```

Collaboration diagram for Tang::position:

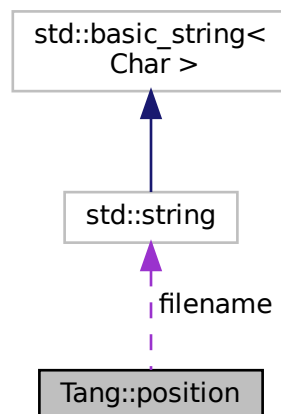

Public Types

- typedef const std::string [filename_type](#)
Type for file name.
- typedef int [counter_type](#)
Type for line and column numbers.

Public Member Functions

- [position](#) ([filename_type](#) *f=((void *) 0), [counter_type](#) l=1, [counter_type](#) c=1)
Construct a position.
- void [initialize](#) ([filename_type](#) *fn=((void *) 0), [counter_type](#) l=1, [counter_type](#) c=1)
Initialization.

Line and Column related manipulators

- void [lines](#) ([counter_type](#) count=1)
(line related) Advance to the COUNT next lines.
- void [columns](#) ([counter_type](#) count=1)
(column related) Advance to the COUNT next columns.

Public Attributes

- [filename_type](#) * [filename](#)
File name to which this position refers.
- [counter_type](#) [line](#)
Current line number.
- [counter_type](#) [column](#)
Current column number.

5.14.1 Detailed Description

A point in a source file.

The documentation for this class was generated from the following file:


- build/generated/[location.hh](#)

5.15 Tang::Program Class Reference

Represents a compiled script or template that may be executed.

```
#include <program.hpp>
```

Collaboration diagram for Tang::Program:

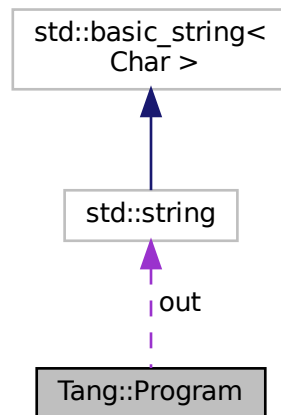

Public Types

- enum [CodeType](#) { [Script](#) , [Template](#) }
Indicate the type of code that was supplied to the [Program](#).

Public Member Functions

- [Program](#) (std::string code, [CodeType](#) codeType)
Create a compiled program using the provided code.
- [~Program](#) ()
The [Program](#) Destructor.
- [Program](#) (const [Program](#) &program)
The Copy Constructor.
- [Program](#) & [operator=](#) (const [Program](#) &program)
The Copy Assignment operator.
- [Program](#) ([Program](#) &&program)
The Move Constructor.
- [Program](#) & [operator=](#) ([Program](#) &&program)
The Move Assignment operator.
- std::string [getCode](#) () const
Get the code that was provided when the [Program](#) was created.
- std::optional< const [AstNode](#) * > [getAst](#) () const
Get the AST that was generated by the parser.

- `std::string dumpBytecode () const`
Get the Opcodes of the compiled program, formatted like Assembly.
- `std::optional< const GarbageCollected > getResult () const`
Get the result of the [Program](#) execution, if it exists.
- `void addBytecode (uint64_t)`
Add a `uint64_t` to the Bytecode.
- `Program & execute ()`
Execute the program's Bytecode, and return the current [Program](#) object.

Public Attributes

- `std::string out`
The output of the program, resulting from the program execution.

5.15.1 Detailed Description

Represents a compiled script or template that may be executed.

5.15.2 Member Enumeration Documentation

5.15.2.1 CodeType

```
enum Tang::Program::CodeType
```

Indicate the type of code that was supplied to the [Program](#).

Enumerator

Script	The code is pure Tang script, without any templating.
Template	The code is a template.

5.15.3 Constructor & Destructor Documentation

5.15.3.1 Program()

```
Program::Program (
    std::string code,
    Program::CodeType codeType )
```

Create a compiled program using the provided code.

Parameters

<i>code</i>	The code to be compiled.
<i>codeType</i>	Whether the code is a <i>Script</i> or <i>Template</i> .

5.15.4 Member Function Documentation

5.15.4.1 addBytecode()

```
void Program::addBytecode (
    uint64_t op )
```

Add a `uint64_t` to the Bytecode.

Parameters

<i>op</i>	The value to add to the Bytecode.
-----------	-----------------------------------

5.15.4.2 dumpBytecode()

```
string Program::dumpBytecode ( ) const
```

Get the Opcodes of the compiled program, formatted like Assembly.

Returns

A string containing the Opcode representation.

5.15.4.3 execute()

```
Program & Program::execute ( )
```

Execute the program's Bytecode, and return the current [Program](#) object.

Returns

The current [Program](#) object.

5.15.4.4 getAst()

```
optional< const AstNode * > Program::getAst ( ) const
```

Get the AST that was generated by the parser.

The parser may have failed, so the return is an optional<> type. If the compilation failed, check Program::error.

Returns

A pointer to the AST, if it exists.

5.15.4.5 getCode()

```
string Program::getCode ( ) const
```

Get the code that was provided when the Program was created.

Returns

The source code from which the Program was created.

5.15.4.6 getResult()

```
optional< const GarbageCollected > Program::getResult ( ) const
```

Get the result of the Program execution, if it exists.

Returns

The result of the Program execution, if it exists.

The documentation for this class was generated from the following files:

- include/program.hpp
- src/program-dumpBytecode.cpp
- src/program-execute.cpp
- src/program.cpp

5.16 Tang::SingletonObjectPool< T > Class Template Reference

Public Member Functions

- T * [get](#) ()
Request an uninitialized memory location from the pool for an object T.
- void [recycle](#) (T *obj)
Recycle a memory location for an object T.
- [~SingletonObjectPool](#) ()
Destructor.

Static Public Member Functions

- static [SingletonObjectPool](#)< T > & [getInstance](#) ()
Get the singleton instance of the object pool.

5.16.1 Member Function Documentation

5.16.1.1 [get\(\)](#)

```
template<class T >
T* Tang::SingletonObjectPool< T >::get ( ) [inline]
```

Request an uninitialized memory location from the pool for an object T.

Returns

An uninitialized memory location for an object T.

5.16.1.2 [getInstance\(\)](#)

```
template<class T >
static SingletonObjectPool<T>& Tang::SingletonObjectPool< T >::getInstance ( ) [inline],
[static]
```

Get the singleton instance of the object pool.

Returns

The singleton instance of the object pool.

5.16.1.3 [recycle\(\)](#)

```
template<class T >
void Tang::SingletonObjectPool< T >::recycle (
    T * obj ) [inline]
```

Recycle a memory location for an object T.

Parameters

<i>obj</i>	The memory location to recycle.
------------	---------------------------------

The documentation for this class was generated from the following file:

- [include/singletonObjectPool.hpp](#)

5.17 Tang::TangBase Class Reference

The base class for the Tang programming language.

```
#include <tangBase.hpp>
```

Public Member Functions

- [TangBase](#) ()
The constructor.
- [Program compileScript](#) (std::string script)
Compile the provided source code as a script and return a [Program](#).

5.17.1 Detailed Description

The base class for the Tang programming language.

This class is the fundamental starting point to compile and execute a Tang program. It may be considered in three parts:

1. It acts as an extendable interface through which additional "library" functions can be added to the language. It is intentionally designed that each instance of [TangBase](#) will have its own library functions.
2. It provides methods to compile scripts and templates, resulting in a [Program](#) object.
3. The [Program](#) object may then be executed, providing instance-specific context information (*i.e.*, state).

5.17.2 Constructor & Destructor Documentation

5.17.2.1 TangBase()

```
TangBase::TangBase ( )
```

The constructor.

Isn't it glorious.

5.17.3 Member Function Documentation

5.17.3.1 compileScript()

```
Program TangBase::compileScript (
    std::string script )
```

Compile the provided source code as a script and return a [Program](#).

Parameters

<i>script</i>	The Tang script to be compiled.
---------------	---------------------------------

Returns

The [Program](#) object representing the compiled script.

The documentation for this class was generated from the following files:


- [include/tangBase.hpp](#)
- [src/tangBase.cpp](#)

5.18 Tang::TangScanner Class Reference


The Flex lexer class for the main Tang language.

```
#include <tangScanner.hpp>
```

Inheritance diagram for Tang::TangScanner:



Collaboration diagram for Tang::TangScanner:



Public Member Functions

- [TangScanner](#) (std::istream &arg_yyin, std::ostream &arg_yyout)

The constructor for the Scanner.

- virtual Tang::TangParser::symbol_type [get_next_token](#) ()

A pass-through function that we supply so that we can provide a Bison 3 token return type instead of the `int` that is returned by the default class configuration.

5.18.1 Detailed Description

The Flex lexer class for the main Tang language.

Flex requires that our lexer class inherit from `yyFlexLexer`, an "intermediate" class whose real name is "TangTangFlexLexer". We are subclassing it so that we can override the return type of [get_next_token\(\)](#), for compatibility with Bison 3 tokens.

5.18.2 Constructor & Destructor Documentation

5.18.2.1 TangScanner()

```
Tang::TangScanner::TangScanner (
    std::istream & arg_yyin,
    std::ostream & arg_yyout ) [inline]
```

The constructor for the Scanner.

The design of the Flex lexer is to tokenize the contents of an input stream, and to write any error messages to an output stream. In our implementation, however, errors are returned differently, so the output stream is never used. It's presence is retained, however, in case it is needed in the future.

For now, the general approach should be to supply the input as a string stream, and to use `std::cout` as the output.

Parameters

<i>arg_yyin</i>	The input stream to be tokenized
<i>arg_yyout</i>	The output stream (not currently used)

5.18.3 Member Function Documentation

5.18.3.1 get_next_token()

```
virtual Tang::TangParser::symbol_type Tang::TangScanner::get_next_token ( ) [virtual]
```

A pass-through function that we supply so that we can provide a Bison 3 token return type instead of the `int` that is returned by the default class configuration.

Returns

A Bison 3 token representing the lexeme that was recognized.

The documentation for this class was generated from the following file:

- include/[tangScanner.hpp](#)

Chapter 6

File Documentation


6.1 build/generated/location.hh File Reference

Define the Tang ::location class.


```
#include <iostream>
```

```
#include <string>
```

Include dependency graph for location.hh:

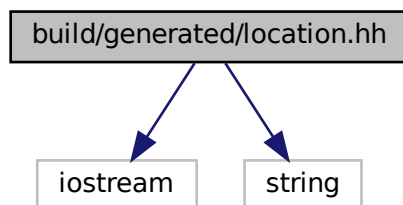

This graph shows which files directly or indirectly include this file:



Classes

- class [Tang::position](#)
A point in a source file.
- class [Tang::location](#)
Two points in a source file.

Macros

- `#define YY_NULLPTR ((void*)0)`

Functions

- position & [Tang::operator+=](#) (position &res, position::counter_type width)
Add width columns, in place.
- position [Tang::operator+](#) (position res, position::counter_type width)
Add width columns.
- position & [Tang::operator-=](#) (position &res, position::counter_type width)
Subtract width columns, in place.
- position [Tang::operator-](#) (position res, position::counter_type width)
Subtract width columns.
- template<typename YYChar >
std::basic_ostream< YYChar > & [Tang::operator<<](#) (std::basic_ostream< YYChar > &ostr, const position &pos)
Intercept output stream redirection.
- location & [Tang::operator+=](#) (location &res, const location &end)
Join two locations, in place.
- location [Tang::operator+](#) (location res, const location &end)
Join two locations.
- location & [Tang::operator+=](#) (location &res, location::counter_type width)
Add width columns to the end position, in place.
- location [Tang::operator+](#) (location res, location::counter_type width)
Add width columns to the end position.
- location & [Tang::operator-=](#) (location &res, location::counter_type width)
Subtract width columns to the end position, in place.
- location [Tang::operator-](#) (location res, location::counter_type width)
Subtract width columns to the end position.
- template<typename YYChar >
std::basic_ostream< YYChar > & [Tang::operator<<](#) (std::basic_ostream< YYChar > &ostr, const location &loc)
Intercept output stream redirection.

6.1.1 Detailed Description

Define the Tang ::location class.

6.1.2 Function Documentation

6.1.2.1 operator<<() [1/2]

```
template<typename YYChar >
std::basic_ostream<YYChar>& Tang::operator<< (
    std::basic_ostream< YYChar > & ostr,
    const location & loc )
```

Intercept output stream redirection.

Parameters

<i>ostr</i>	the destination output stream
<i>loc</i>	a reference to the location to redirect

Avoid duplicate information.

6.1.2.2 operator<<() [2/2]

```
template<typename YYChar >
std::basic_ostream<YYChar>& Tang::operator<< (
    std::basic_ostream< YYChar > & ostr,
    const position & pos )
```

Intercept output stream redirection.


Parameters

<i>ostr</i>	the destination output stream
<i>pos</i>	a reference to the position to redirect


6.2 include/astNode.hpp File Reference

Define the [Tang::AstNode](#) and its associated/derivative classes.

```
#include <string>
#include "location.hh"
#include "program.hpp"
Include dependency graph for astNode.hpp:
```

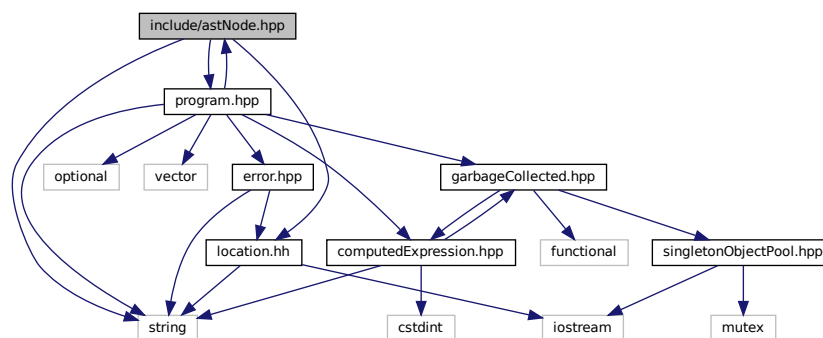

This graph shows which files directly or indirectly include this file:



Classes

- class [Tang::AstNode](#)
Base class for representing nodes of an Abstract Syntax Tree (AST).


6.2.1 Detailed Description

Define the [Tang::AstNode](#) and its associated/derivative classes.


6.3 include/astNodeAdd.hpp File Reference

```
#include "astNode.hpp"
```

Include dependency graph for astNodeAdd.hpp:

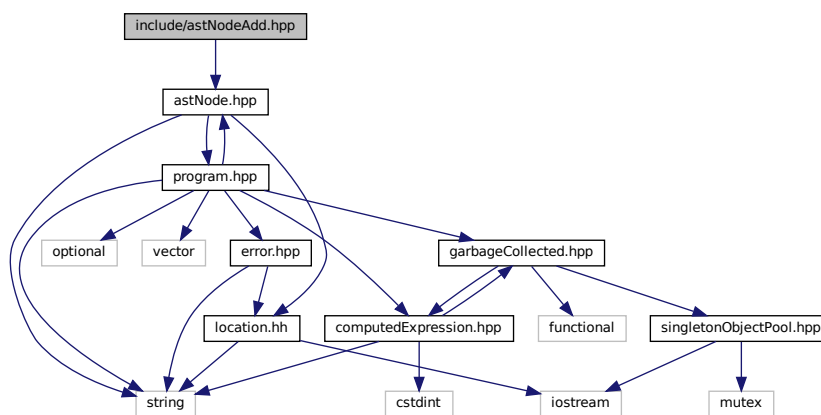

This graph shows which files directly or indirectly include this file:

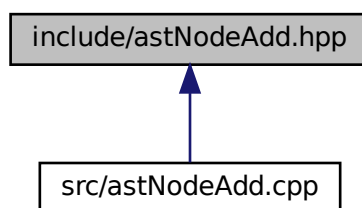


Classes

- class [Tang::AstNodeAdd](#)
An [AstNode](#) that represents a "+" expression.


6.4 include/astNodeFloat.hpp File Reference

```
#include "astNode.hpp"
```

Include dependency graph for astNodeFloat.hpp:

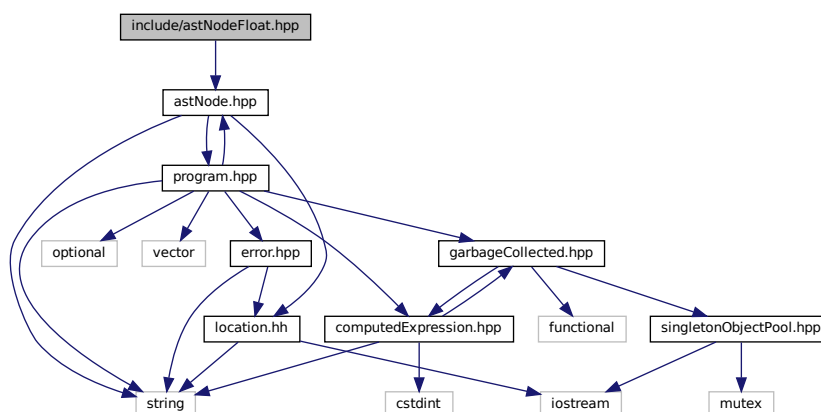

This graph shows which files directly or indirectly include this file:

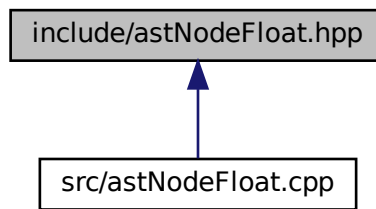


Classes

- class [Tang::AstNodeFloat](#)
An [AstNode](#) that represents an float literal.


6.5 include/astNodeInteger.hpp File Reference

```
#include "astNode.hpp"
```

Include dependency graph for astNodeInteger.hpp:

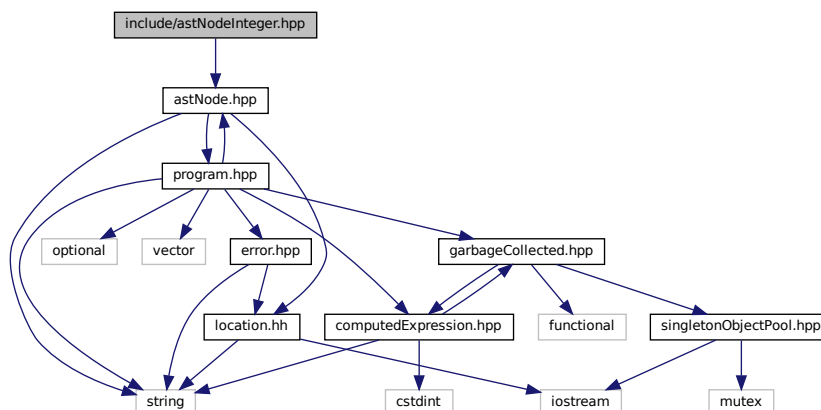

This graph shows which files directly or indirectly include this file:

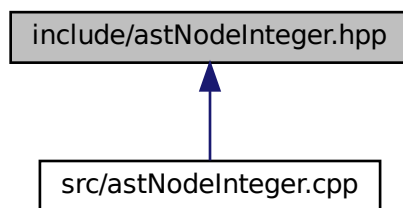


Classes

- class [Tang::AstNodeInteger](#)
An [AstNode](#) that represents an integer literal.


6.6 include/astNodeNegative.hpp File Reference

```
#include "astNode.hpp"
```

Include dependency graph for astNodeNegative.hpp:

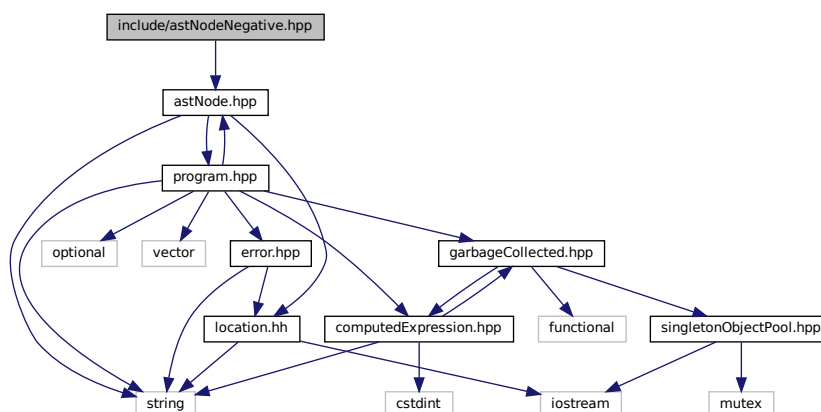

This graph shows which files directly or indirectly include this file:

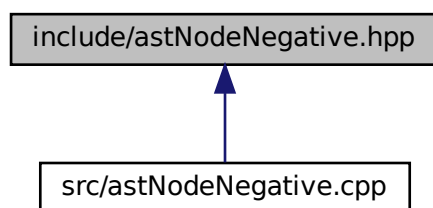


Classes

- class [Tang::AstNodeNegative](#)
An [AstNode](#) that represents a unary negation.


6.7 include/astNodeSubtract.hpp File Reference

```
#include "astNode.hpp"
```

Include dependency graph for astNodeSubtract.hpp:

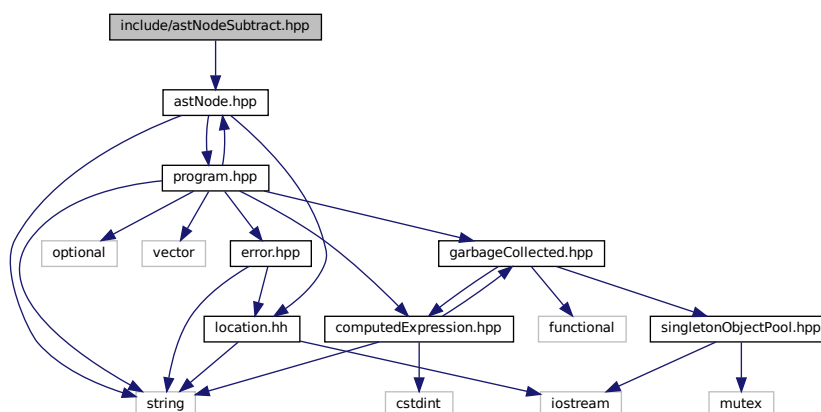

This graph shows which files directly or indirectly include this file:

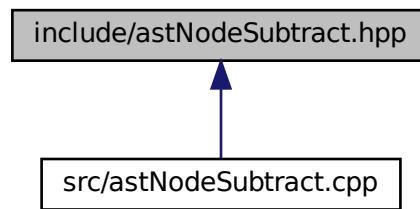


Classes

- class [Tang::AstNodeSubtract](#)
An [AstNode](#) that represents a "-" expression.


6.8 include/computedExpression.hpp File Reference

```
#include <cstdlib>
#include <string>
#include "garbageCollected.hpp"
```

Include dependency graph for computedExpression.hpp:

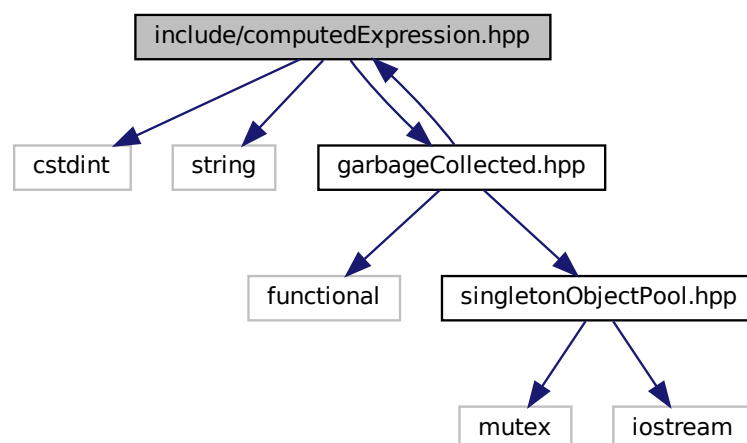

This graph shows which files directly or indirectly include this file:

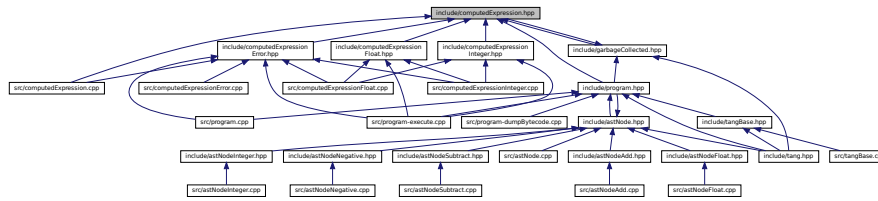

Classes

- class [Tang::ComputedExpression](#)


Represents the result of a computation that has been executed.

6.9 include/computedExpressionError.hpp File Reference


```
#include "computedExpression.hpp"
```

```
#include "error.hpp"
```

Include dependency graph for computedExpressionError.hpp:

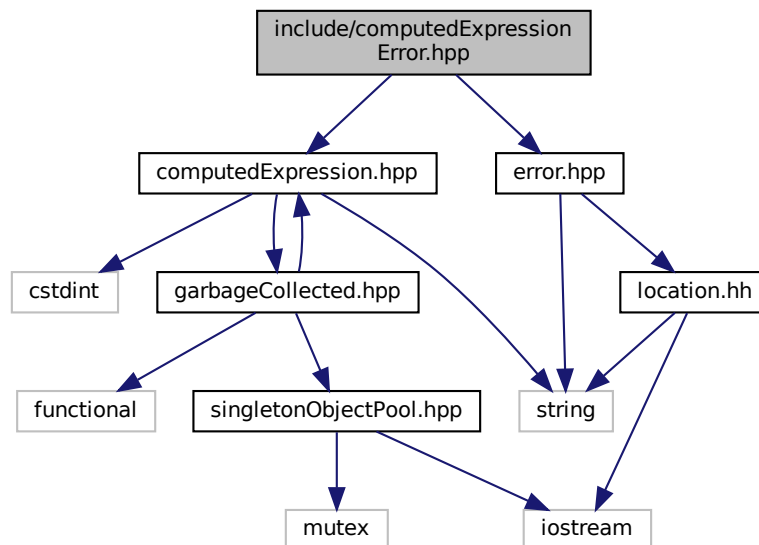

This graph shows which files directly or indirectly include this file:




Classes

- class [Tang::ComputedExpressionError](#)
Represents a Runtime [Error](#).


6.10 include/computedExpressionFloat.hpp File Reference

```
#include "computedExpression.hpp"
```

Include dependency graph for computedExpressionFloat.hpp:

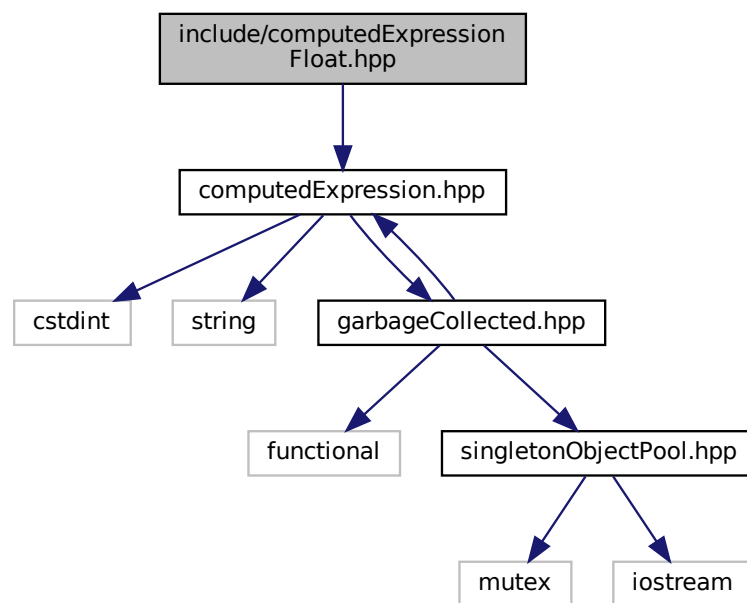

This graph shows which files directly or indirectly include this file:




Classes

- class [Tang::ComputedExpressionFloat](#)
Represents a Float that is the result of a computation.


6.11 include/computedExpressionInteger.hpp File Reference

```
#include "computedExpression.hpp"
```

Include dependency graph for computedExpressionInteger.hpp:

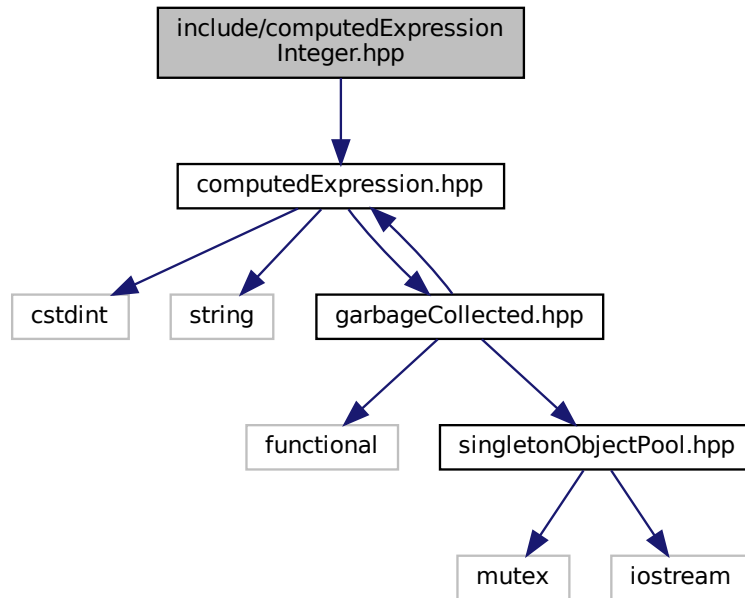

This graph shows which files directly or indirectly include this file:




Classes

- class [Tang::ComputedExpressionInteger](#)
Represents an Integer that is the result of a computation.


6.12 include/error.hpp File Reference

Define the [Tang::Error](#) class used to describe syntax and runtime errors.

```
#include <string>
#include "location.hh"
Include dependency graph for error.hpp:
```

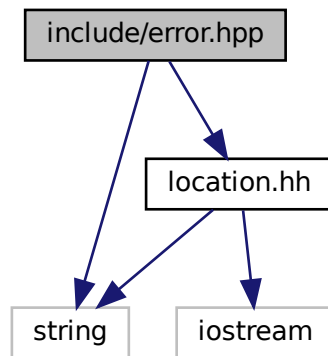

This graph shows which files directly or indirectly include this file:



Classes

- class Tang::Error

The **Error** class is used to report any error of the system, whether a syntax (parsing) error or a runtime (execution) error.

6.12.1 Detailed Description

Define the `Tang::Error` class used to describe syntax and runtime errors.

6.13 include/garbageCollected.hpp File Reference

```
#include <functional>
#include "singletonObjectPool.hpp"
```


6.14.2 Macro Definition Documentation

6.14.2.1 TANG_UNUSED

```
#define TANG_UNUSED (
    x ) x
```

Instruct the compiler that a function argument will not be used so that it does not generate an error.

When defining a function, use the [TANG_UNUSED\(\)](#) macro around any argument which is *not* used in the function, in order to squash any compiler warnings. e.g., `void foo(int TANG_UNUSED(a)) {}`


Parameters

x	The argument to be ignored.
---	-----------------------------

6.15 include/opcode.hpp File Reference

Declare the Opcodes used in the Bytecode representation of a program.

This graph shows which files directly or indirectly include this file:



Enumerations

- enum class [Tang::Opcode](#) {
[INTEGER](#) , [FLOAT](#) , [ADD](#) , [SUBTRACT](#) ,
[NEGATIVE](#) }

6.15.1 Detailed Description

Declare the Opcodes used in the Bytecode representation of a program.

6.15.2 Enumeration Type Documentation

6.15.2.1 Opcode

```
enum Tang::Opcode [strong]
```

Enumerator


INTEGER	Push an integer onto the stack.
FLOAT	Push a floating point number onto the stack.
ADD	Pop rhs, pop lhs, push lhs + rhs.
SUBTRACT	Pop rhs, pop lhs, push lhs - rhs.
NEGATIVE	Pop val, push negative val.

6.16 include/program.hpp File Reference

Define the [Tang::Program](#) class used to compile and execute source code.

```
#include <string>
#include <optional>
#include <vector>
#include "astNode.hpp"
#include "error.hpp"
#include "computedExpression.hpp"
#include "garbageCollected.hpp"
```

Include dependency graph for program.hpp:

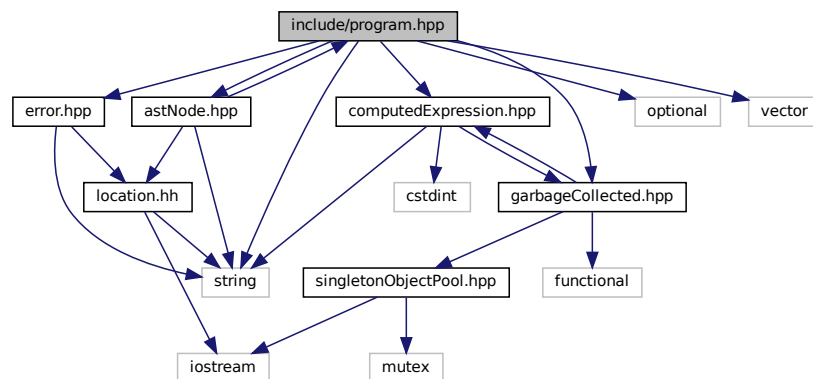

This graph shows which files directly or indirectly include this file:



Classes

- class [Tang::Program](#)
Represents a compiled script or template that may be executed.

Typedefs


- using [Tang::Bytecode](#) = std::vector< uint64_t >
Contains the Opcodes of a compiled program.

6.16.1 Detailed Description


Define the [Tang::Program](#) class used to compile and execute source code.

6.17 include/singletonObjectPool.hpp File Reference

```
#include <mutex>
#include <iostream>
Include dependency graph for singletonObjectPool.hpp:
```

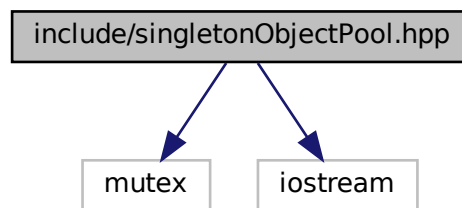

This graph shows which files directly or indirectly include this file:

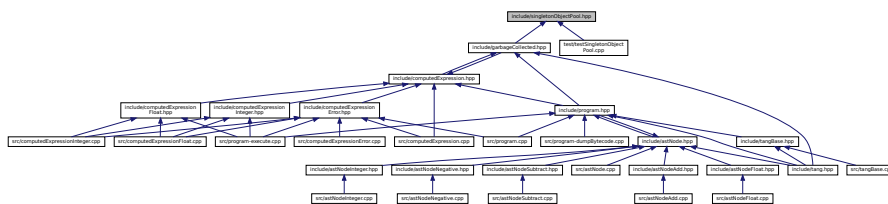

Classes

- class [Tang::SingletonObjectPool< T >](#)

Macros


- #define [GROW](#) 1024
The threshold size to use when allocating blocks of data, measured in the number of instances of the object type.

6.18 include/tang.hpp File Reference

Header file supplied for use by 3rd party code so that they can easily include all necessary headers.

```
#include "tangBase.hpp"
#include "astNode.hpp"
#include "error.hpp"
#include "garbageCollected.hpp"
#include "program.hpp"
```

Include dependency graph for tang.hpp:

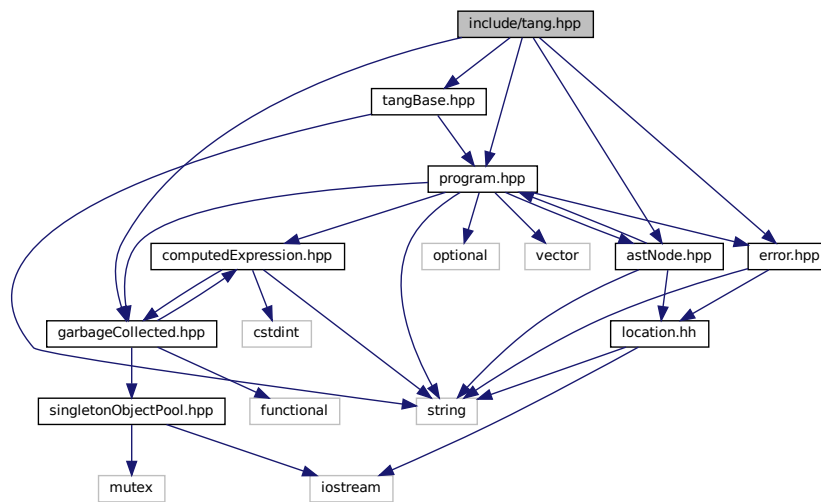

6.18.1 Detailed Description


Header file supplied for use by 3rd party code so that they can easily include all necessary headers.

6.19 include/tangBase.hpp File Reference


Defines the [Tang::TangBase](#) class used to interact with Tang.

```
#include <string>
#include "program.hpp"
```

Include dependency graph for tangBase.hpp:

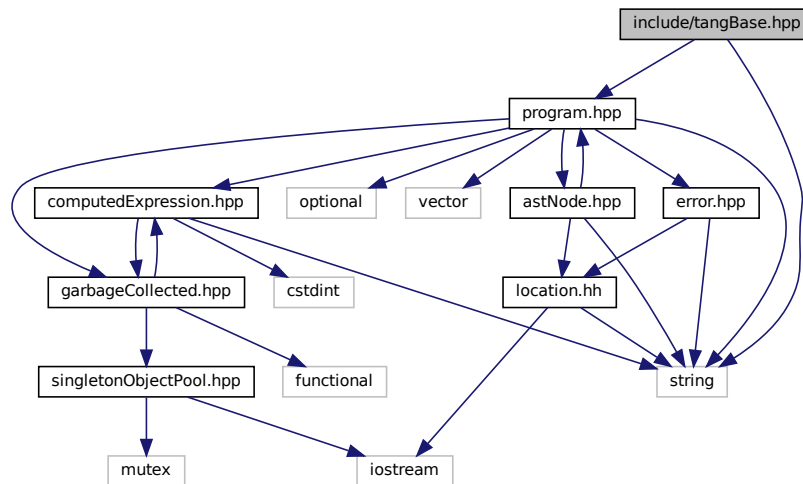

This graph shows which files directly or indirectly include this file:

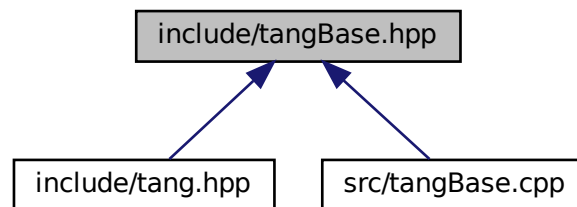

Classes

- class [Tang::TangBase](#)

The base class for the Tang programming language.

6.19.1 Detailed Description


Defines the [Tang::TangBase](#) class used to interact with Tang.

6.20 include/tangScanner.hpp File Reference


Defines the [Tang::TangScanner](#) used to tokenize a Tang script.

```
#include <FlexLexer.h>
#include <iostream>
#include "tangParser.hpp"
```

Include dependency graph for tangScanner.hpp:

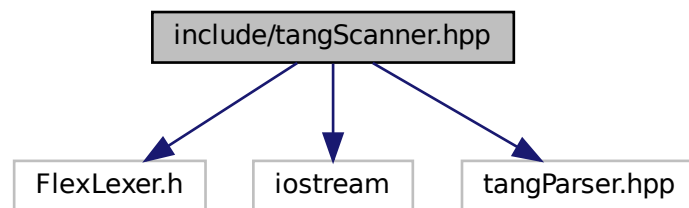

This graph shows which files directly or indirectly include this file:

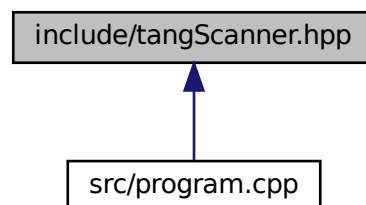

Classes

- class [Tang::TangScanner](#)
The Flex lexer class for the main Tang language.

Macros


- `#define yyFlexLexer TangTangFlexLexer`
- `#define YY_DECL Tang::TangParser::symbol_type Tang::TangScanner::get_next_token\(\)`

6.20.1 Detailed Description

Defines the [Tang::TangScanner](#) used to tokenize a Tang script.


6.21 src/astNode.cpp File Reference

```
#include <iostream>
#include "astNode.hpp"
Include dependency graph for astNode.cpp:
```

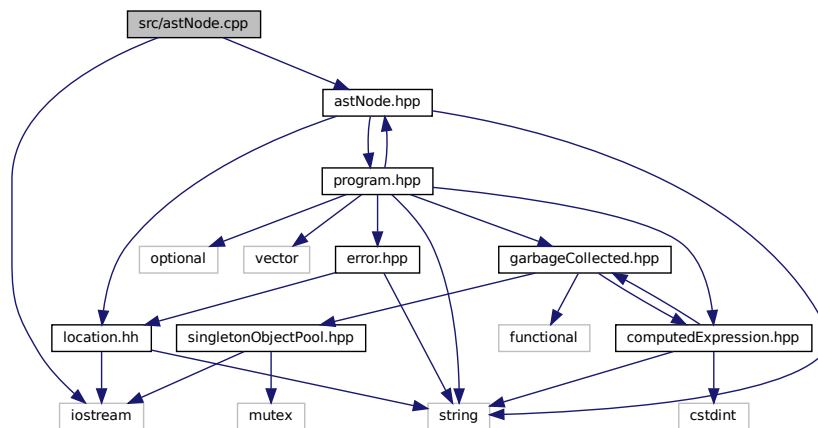


6.22 src/astNodeAdd.cpp File Reference

```
#include "astNodeAdd.hpp"
#include "opcode.hpp"
Include dependency graph for astNodeAdd.cpp:
```

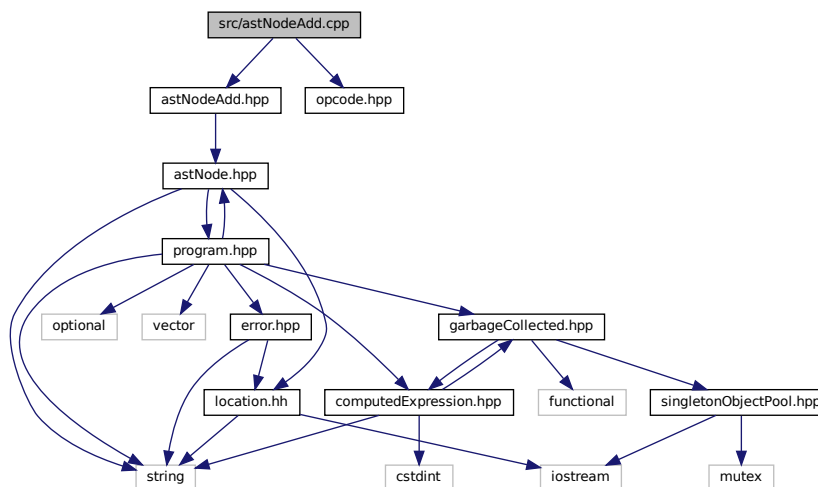


6.23 src/astNodeFloat.cpp File Reference

```
#include <bit>
#include "astNodeFloat.hpp"
#include "opcode.hpp"
Include dependency graph for astNodeFloat.cpp:
```

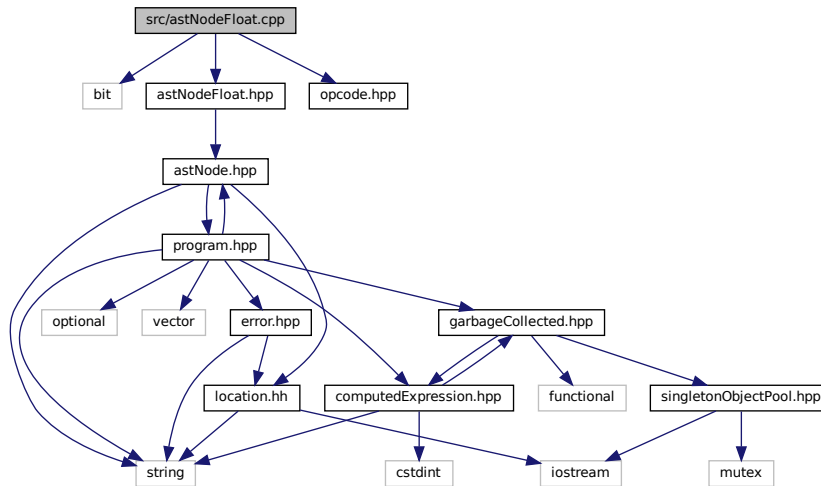


6.24 src/astNodeInteger.cpp File Reference

```
#include <bit>
#include "astNodeInteger.hpp"
#include "opcode.hpp"
Include dependency graph for astNodeInteger.cpp:
```

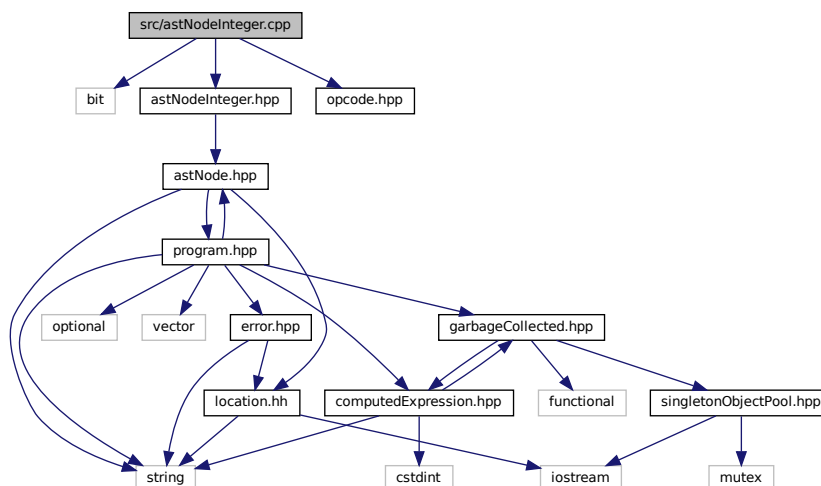


6.25 src/astNodeNegative.cpp File Reference

```
#include <bit>
#include "astNodeNegative.hpp"
#include "opcode.hpp"
Include dependency graph for astNodeNegative.cpp:
```

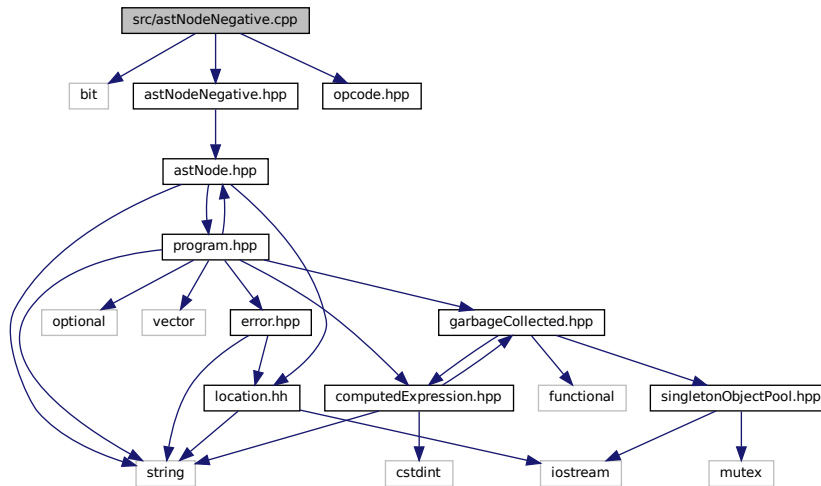


6.26 src/astNodeSubtract.cpp File Reference

```
#include "astNodeSubtract.hpp"
#include "opcode.hpp"
Include dependency graph for astNodeSubtract.cpp:
```

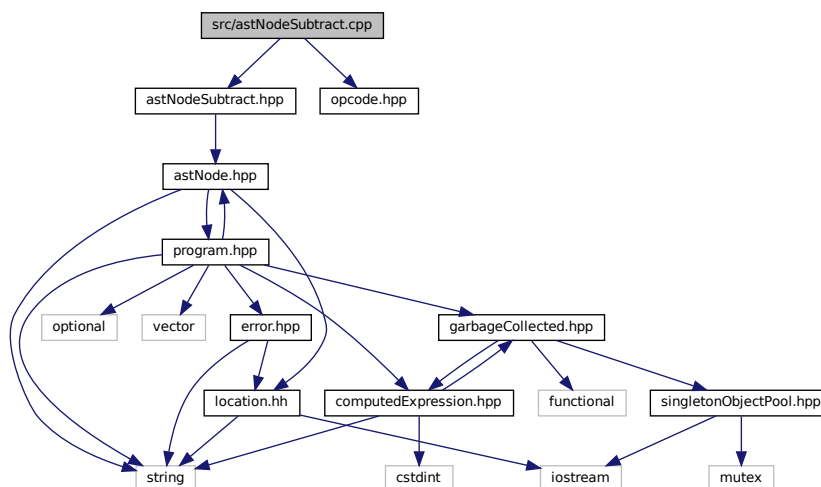

6.27 src/computedExpression.cpp File Reference


```
#include "computedExpression.hpp"  
#include "computedExpressionError.hpp"  
Include dependency graph for computedExpression.cpp:
```

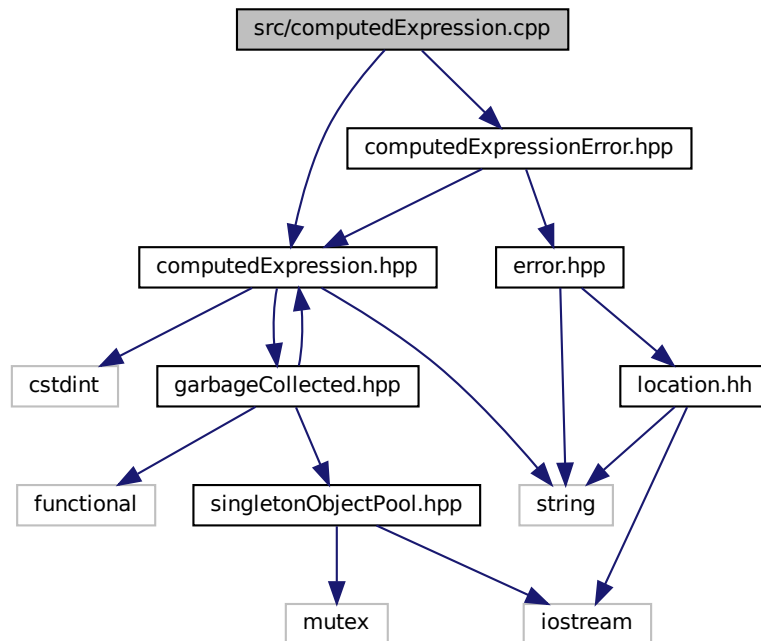

6.28 src/computedExpressionError.cpp File Reference

```
#include "computedExpressionError.hpp"
```

Include dependency graph for computedExpressionError.cpp:

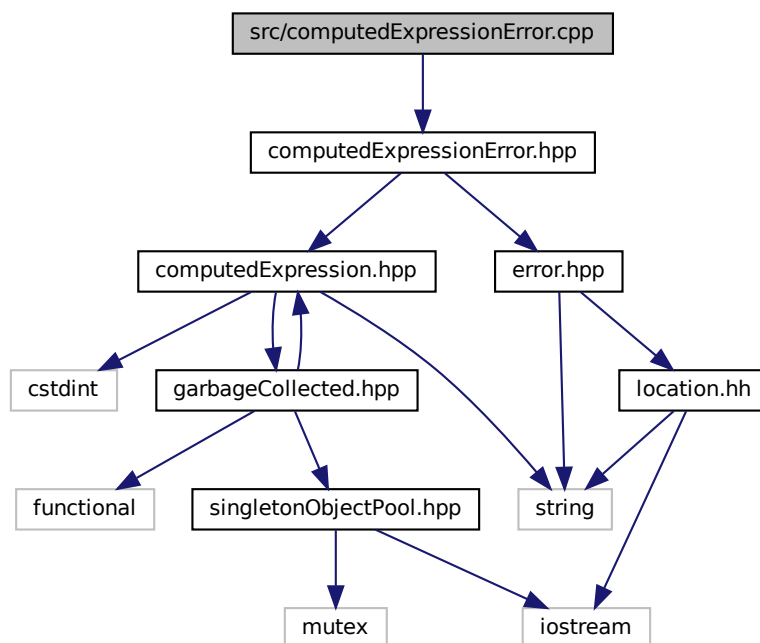


6.29 src/computedExpressionFloat.cpp File Reference

```
#include "computedExpressionFloat.hpp"
```

```
#include "computedExpressionInteger.hpp"
```

```
#include "computedExpressionError.hpp"
```

Include dependency graph for `computedExpressionFloat.cpp`:

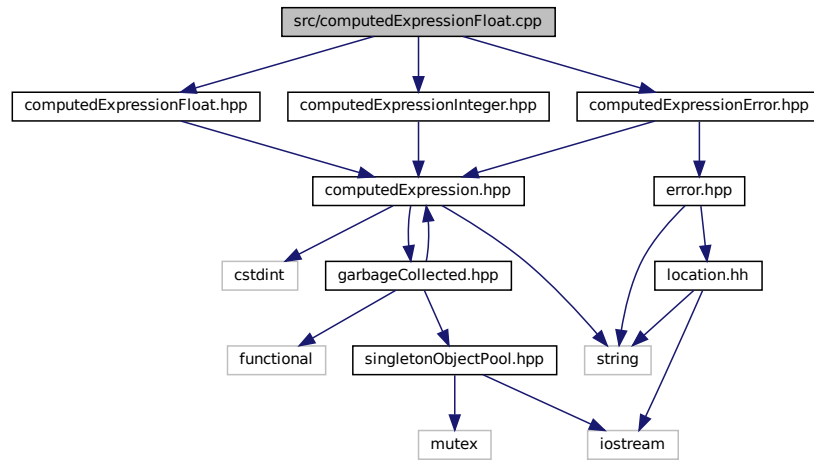


6.30 `src/computedExpressionInteger.cpp` File Reference

```
#include "computedExpressionInteger.hpp"
```

```
#include "computedExpressionFloat.hpp"
```


```
#include "computedExpressionError.hpp"
```

Include dependency graph for `computedExpressionInteger.cpp`:

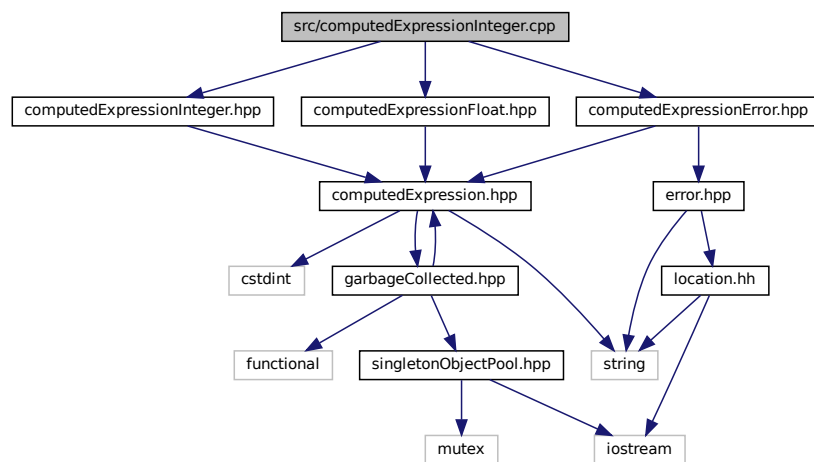


6.31 src/error.cpp File Reference

```
#include "error.hpp"
Include dependency graph for error.cpp:
```

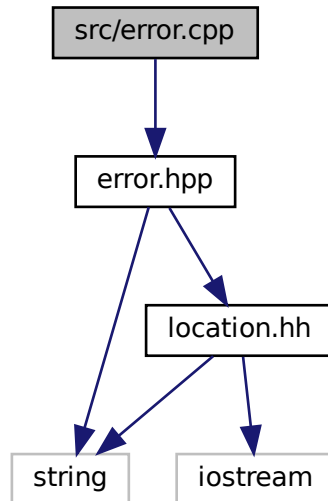

6.32 src/program-dumpBytecode.cpp File Reference

```
#include <sstream>
#include <iomanip>
#include <bit>
#include <cmath>
#include "program.hpp"
#include "opcode.hpp"
Include dependency graph for program-dumpBytecode.cpp:
```

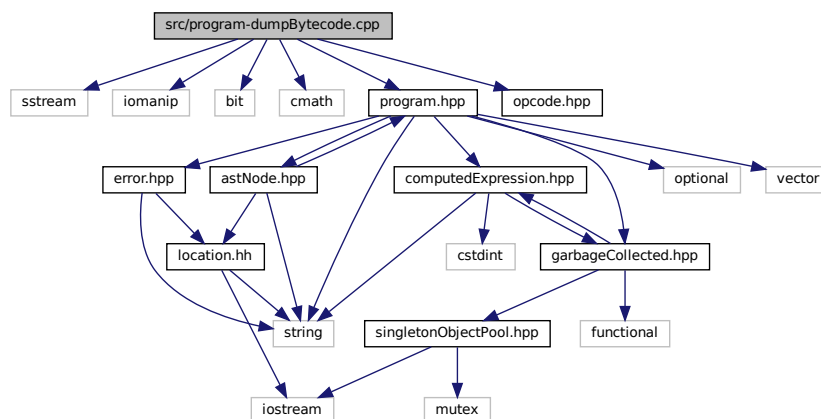

Macros

- `#define DUMPPROGRAMCHECK(x)`
Verify the size of the Bytecode vector so that it may be safely accessed.

6.32.1 Macro Definition Documentation

6.32.1.1 DUMPPROGRAMCHECK

```
#define DUMPPROGRAMCHECK(  
    x )
```

Value:

```
if (this->bytecode.size() < (pc + (x))) \  
    return out.str() + "Error: Opcode truncated\n"
```

Verify the size of the Bytecode vector so that it may be safely accessed.

If the vector is not large enough, an error message is appended to the output string and no further opcodes are printed.


Parameters

<code>x</code>	The number of additional vector entries that should exist.
----------------	--

6.33 src/program-execute.cpp File Reference

```
#include <bit>  
#include "program.hpp"  
#include "opcode.hpp"  
#include "computedExpressionError.hpp"  
#include "computedExpressionInteger.hpp"  
#include "computedExpressionFloat.hpp"
```

Include dependency graph for program-execute.cpp:

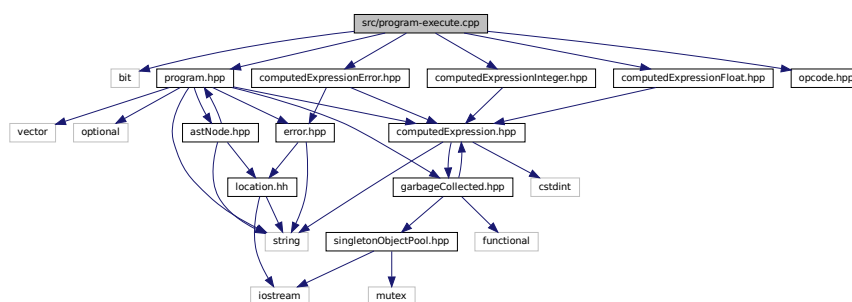

Macros

- `#define EXECUTEPROGRAMCHECK(x)`
Verify the size of the Bytecode vector so that it may be safely accessed.
- `#define STACKCHECK(x)`
Verify the size of the stack vector so that it may be safely accessed.

6.33.1 Macro Definition Documentation

6.33.1.1 EXECUTEPROGRAMCHECK

```
#define EXECUTEPROGRAMCHECK(  
    x )
```

Value:

```
if (this->bytecode.size() < (pc + (x))) { \
    stack.push_back(GarbageCollected::make<ComputedExpressionError>(Error{"Opcode instruction  
truncated."})); \
    pc = this->bytecode.size(); \
    break; \
}
```

Verify the size of the Bytecode vector so that it may be safely accessed.

Parameters

x	The number of additional vector entries that should exist.
---	--

6.33.1.2 STACKCHECK

```
#define STACKCHECK(  
    x )
```

Value:

```
if (stack.size() < (fp + (x))) { \
    stack.push_back(GarbageCollected::make<ComputedExpressionError>(Error{"Insufficient stack depth."})); \
    pc = this->bytecode.size(); \
    break; \
}
```


Verify the size of the stack vector so that it may be safely accessed.

Parameters

x	The number of entries that should exist in the stack.
---	---


6.34 src/program.cpp File Reference

```
#include <sstream>
#include "program.hpp"
#include "tangScanner.hpp"
#include "tangParser.hpp"
#include "computedExpressionError.hpp"
Include dependency graph for program.cpp:
```

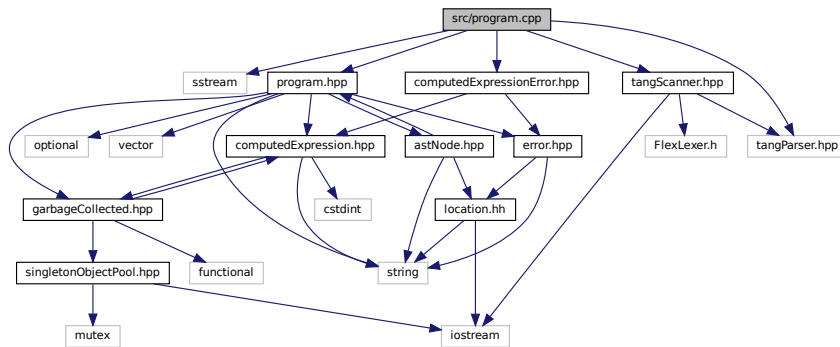

6.35 src/tangBase.cpp File Reference


```
#include "tangBase.hpp"
Include dependency graph for tangBase.cpp:
```

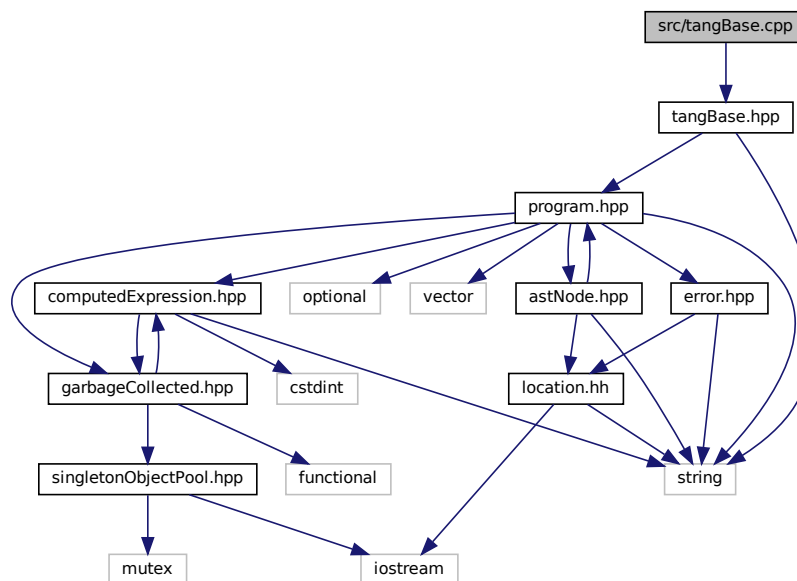

6.36 test/testSingletonObjectPool.cpp File Reference

```
#include <gtest/gtest.h>
#include <stdint>
#include <set>
#include "singletonObjectPool.hpp"
#include <iostream>
```

Include dependency graph for testSingletonObjectPool.cpp:

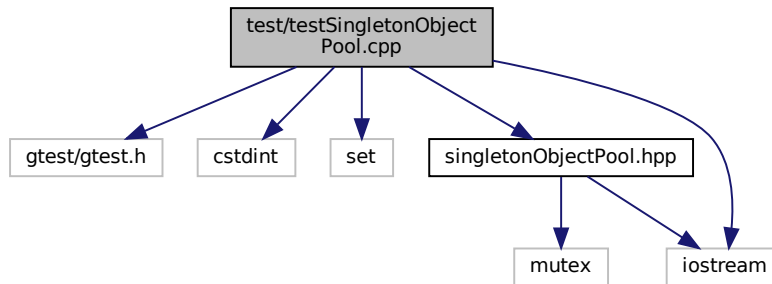

Functions

- **TEST** (Singleton, SameForSameType)
- **TEST** (Singleton, DifferentForDifferentTypes)
- **TEST** (Get, SuccessiveCallsProduceDifferentMemoryAddresses)
- **TEST** (Recycle, RecycledObjectsAreReused)
- **TEST** (Get, SuccessiveCallsAreSequential)
- **TEST** (Get, KeepsGeneratingDifferentPointers)
- **TEST** (Recycle, WorksAfterLargeNumberOfAllocations)
- `int main` (`int argc`, `char **argv`)

Index

- `__add`
 - `Tang::ComputedExpression`, [27](#)
 - `Tang::ComputedExpressionError`, [31](#)
 - `Tang::ComputedExpressionFloat`, [37](#)
 - `Tang::ComputedExpressionInteger`, [41](#)
 - `__negative`
 - `Tang::ComputedExpression`, [28](#)
 - `Tang::ComputedExpressionError`, [33](#)
 - `Tang::ComputedExpressionFloat`, [37](#)
 - `Tang::ComputedExpressionInteger`, [42](#)
 - `__subtract`
 - `Tang::ComputedExpression`, [28](#)
 - `Tang::ComputedExpressionError`, [33](#)
 - `Tang::ComputedExpressionFloat`, [37](#)
 - `Tang::ComputedExpressionInteger`, [42](#)
- `~GarbageCollected`
 - `Tang::GarbageCollected`, [49](#)
- `ADD`
 - `opcode.hpp`, [82](#)
- `addBytecode`
 - `Tang::Program`, [60](#)
- `AstNode`
 - `Tang::AstNode`, [11](#)
- `AstNodeAdd`
 - `Tang::AstNodeAdd`, [14](#)
- `AstNodeFloat`
 - `Tang::AstNodeFloat`, [17](#)
- `AstNodeInteger`
 - `Tang::AstNodeInteger`, [20](#)
- `AstNodeNegative`
 - `Tang::AstNodeNegative`, [23](#)
- `AstNodeSubtract`
 - `Tang::AstNodeSubtract`, [26](#)
- `build/generated/location.hh`, [67](#)
- `CodeType`
 - `Tang::Program`, [59](#)
- `compileScript`
 - `Tang::TangBase`, [63](#)
- `ComputedExpressionError`
 - `Tang::ComputedExpressionError`, [31](#)
- `ComputedExpressionFloat`
 - `Tang::ComputedExpressionFloat`, [36](#)
- `ComputedExpressionInteger`
 - `Tang::ComputedExpressionInteger`, [41](#)
- `dump`
 - `Tang::ComputedExpression`, [28](#)
 - `Tang::ComputedExpressionError`, [33](#)
 - `Tang::ComputedExpressionFloat`, [38](#)
 - `Tang::ComputedExpressionInteger`, [42](#)
- `dumpBytecode`
 - `Tang::Program`, [60](#)
- `DUMPPROGRAMCHECK`
 - `program-dumpBytecode.cpp`, [94](#)
- `Error`
 - `Tang::Error`, [46](#)
- `execute`
 - `Tang::Program`, [60](#)
- `EXECUTEPROGRAMCHECK`
 - `program-execute.cpp`, [95](#)
- `FLOAT`
 - `opcode.hpp`, [82](#)
- `GarbageCollected`
 - `Tang::GarbageCollected`, [48, 49](#)
- `get`
 - `Tang::SingletonObjectPool< T >`, [62](#)
- `get_next_token`
 - `Tang::TangScanner`, [65](#)
- `getAst`
 - `Tang::Program`, [60](#)
- `getCode`
 - `Tang::Program`, [61](#)
- `getInstance`
 - `Tang::SingletonObjectPool< T >`, [62](#)
- `getResult`
 - `Tang::Program`, [61](#)
- `include/astNode.hpp`, [69](#)
- `include/astNodeAdd.hpp`, [70](#)
- `include/astNodeFloat.hpp`, [71](#)
- `include/astNodeInteger.hpp`, [72](#)
- `include/astNodeNegative.hpp`, [73](#)
- `include/astNodeSubtract.hpp`, [74](#)
- `include/computedExpression.hpp`, [75](#)
- `include/computedExpressionError.hpp`, [76](#)
- `include/computedExpressionFloat.hpp`, [77](#)
- `include/computedExpressionInteger.hpp`, [78](#)
- `include/error.hpp`, [78](#)
- `include/garbageCollected.hpp`, [79](#)
- `include/macros.hpp`, [80](#)
- `include/opcode.hpp`, [81](#)
- `include/program.hpp`, [82](#)
- `include/singletonObjectPool.hpp`, [83](#)
- `include/tang.hpp`, [84](#)

- include/tangBase.hpp, 84
- include/tangScanner.hpp, 86
- INTEGER
 - opcode.hpp, 82
- is_equal
 - Tang::ComputedExpression, 29
 - Tang::ComputedExpressionError, 34
 - Tang::ComputedExpressionFloat, 38
 - Tang::ComputedExpressionInteger, 42, 43
- location.hh
 - operator<<, 68, 69
- macros.hpp
 - TANG_UNUSED, 81
- make
 - Tang::GarbageCollected, 49
- makeCopy
 - Tang::AstNode, 11
 - Tang::AstNodeAdd, 14
 - Tang::AstNodeFloat, 17
 - Tang::AstNodeInteger, 20
 - Tang::AstNodeNegative, 23
 - Tang::AstNodeSubtract, 26
 - Tang::ComputedExpression, 29
 - Tang::ComputedExpressionError, 34
 - Tang::ComputedExpressionFloat, 39
 - Tang::ComputedExpressionInteger, 43
- NEGATIVE
 - opcode.hpp, 82
- Opcode
 - opcode.hpp, 81
- opcode.hpp
 - ADD, 82
 - FLOAT, 82
 - INTEGER, 82
 - NEGATIVE, 82
 - Opcode, 81
 - SUBTRACT, 82
- operator<<
 - location.hh, 68, 69
 - Tang::GarbageCollected, 54
- operator*
 - Tang::GarbageCollected, 50
- operator+
 - Tang::GarbageCollected, 50
- operator-
 - Tang::GarbageCollected, 51
- operator->
 - Tang::GarbageCollected, 52
- operator=
 - Tang::GarbageCollected, 52, 53
- operator==
 - Tang::GarbageCollected, 53, 54
- Program
 - Tang::Program, 59
- program-dumpBytecode.cpp
 - DUMPPROGRAMCHECK, 94
- program-execute.cpp
 - EXECUTEPROGRAMCHECK, 95
 - STACKCHECK, 95
- recycle
 - Tang::SingletonObjectPool< T >, 62
- Script
 - Tang::Program, 59
- src/astNode.cpp, 87
- src/astNodeAdd.cpp, 87
- src/astNodeFloat.cpp, 88
- src/astNodeInteger.cpp, 88
- src/astNodeNegative.cpp, 89
- src/astNodeSubtract.cpp, 89
- src/computedExpression.cpp, 90
- src/computedExpressionError.cpp, 91
- src/computedExpressionFloat.cpp, 91
- src/computedExpressionInteger.cpp, 92
- src/error.cpp, 93
- src/program-dumpBytecode.cpp, 93
- src/program-execute.cpp, 94
- src/program.cpp, 96
- src/tangBase.cpp, 96
- STACKCHECK
 - program-execute.cpp, 95
- SUBTRACT
 - opcode.hpp, 82
- Tang::AstNode, 9
 - AstNode, 11
 - makeCopy, 11
- Tang::AstNodeAdd, 12
 - AstNodeAdd, 14
 - makeCopy, 14
- Tang::AstNodeFloat, 15
 - AstNodeFloat, 17
 - makeCopy, 17
- Tang::AstNodeInteger, 18
 - AstNodeInteger, 20
 - makeCopy, 20
- Tang::AstNodeNegative, 21
 - AstNodeNegative, 23
 - makeCopy, 23
- Tang::AstNodeSubtract, 24
 - AstNodeSubtract, 26
 - makeCopy, 26
- Tang::ComputedExpression, 27
 - __add, 27
 - __negative, 28
 - __subtract, 28
 - dump, 28
 - is_equal, 29
 - makeCopy, 29
- Tang::ComputedExpressionError, 30
 - __add, 31
 - __negative, 33

- __subtract, 33
 - ComputedExpressionError, 31
 - dump, 33
 - is_equal, 34
 - makeCopy, 34
- Tang::ComputedExpressionFloat, 35
 - __add, 37
 - __negative, 37
 - __subtract, 37
 - ComputedExpressionFloat, 36
 - dump, 38
 - is_equal, 38
 - makeCopy, 39
- Tang::ComputedExpressionInteger, 40
 - __add, 41
 - __negative, 42
 - __subtract, 42
 - ComputedExpressionInteger, 41
 - dump, 42
 - is_equal, 42, 43
 - makeCopy, 43
- Tang::Error, 44
 - Error, 46
- Tang::GarbageCollected, 46
 - ~GarbageCollected, 49
 - GarbageCollected, 48, 49
 - make, 49
 - operator<<, 54
 - operator*, 50
 - operator+, 50
 - operator-, 51
 - operator->, 52
 - operator=, 52, 53
 - operator==, 53, 54
- Tang::location, 55
- Tang::position, 56
- Tang::Program, 58
 - addBytecode, 60
 - CodeType, 59
 - dumpBytecode, 60
 - execute, 60
 - getAst, 60
 - getCode, 61
 - getResult, 61
 - Program, 59
 - Script, 59
 - Template, 59
- Tang::SingletonObjectPool< T >, 61
 - get, 62
 - getInstance, 62
 - recycle, 62
- Tang::TangBase, 63
 - compileScript, 63
 - TangBase, 63
- Tang::TangScanner, 64
 - get_next_token, 65
 - TangScanner, 65
- TANG_UNUSED
- macros.hpp, 81
- TangBase
 - Tang::TangBase, 63
- TangScanner
 - Tang::TangScanner, 65
- Template
 - Tang::Program, 59
- test/testSingletonObjectPool.cpp, 97