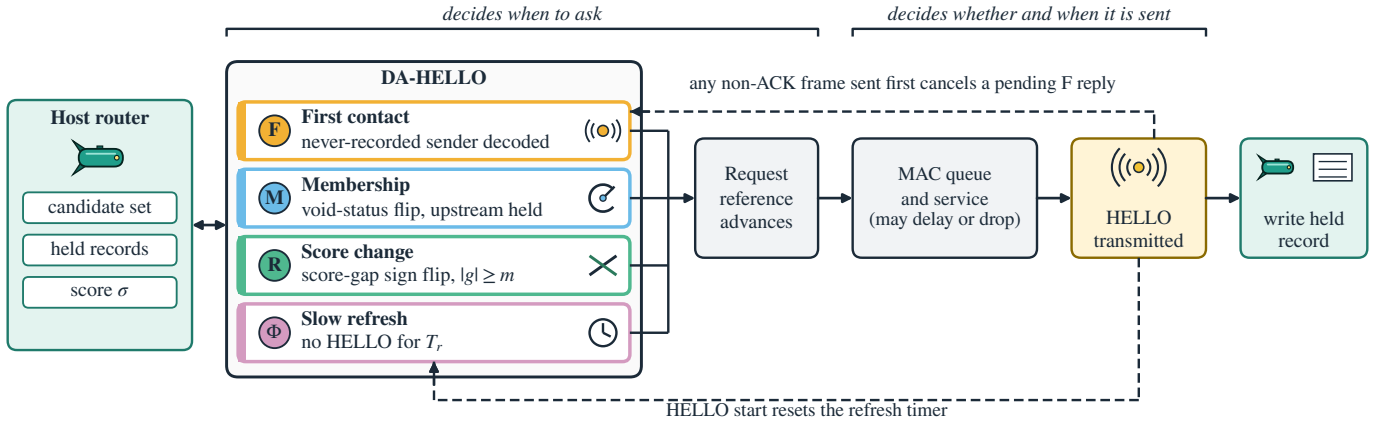
decides when to ask
decides whether and when it is sent
Host router
candidate set
held records
score σ
DA-HELLO
F
First contact
never-recorded sender decoded
M
Membership
void-status flip, upstream held
R
Score change
score-gap sign flip, $|g| \geq m$
Φ
Slow refresh
no HELLO for T_r
any non-ACK frame sent first cancels a pending F reply
Request reference advances
MAC queue and service (may delay or drop)
HELLO transmitted
write held record
HELLO start resets the refresh timer