

Process & Decision Documentation

Project/Assignment Decisions

Side Quests and A4 (Individual Work)


Redesigned the interactive story that unfolds through multiple game states and files, branching like a small decision tree. The code was modified to be a Batman V.S. Joker shortstory that can go two ways for each character that is randomly given to the player. I changed the original game's game states, colour design, and texts to reflect the story.

Default game (States):

Win or Lose

GBDA302 • Week 3 — Game States, UI, Menus

Tip: use Enter / I on the start screen. Press R on win/lose to return.

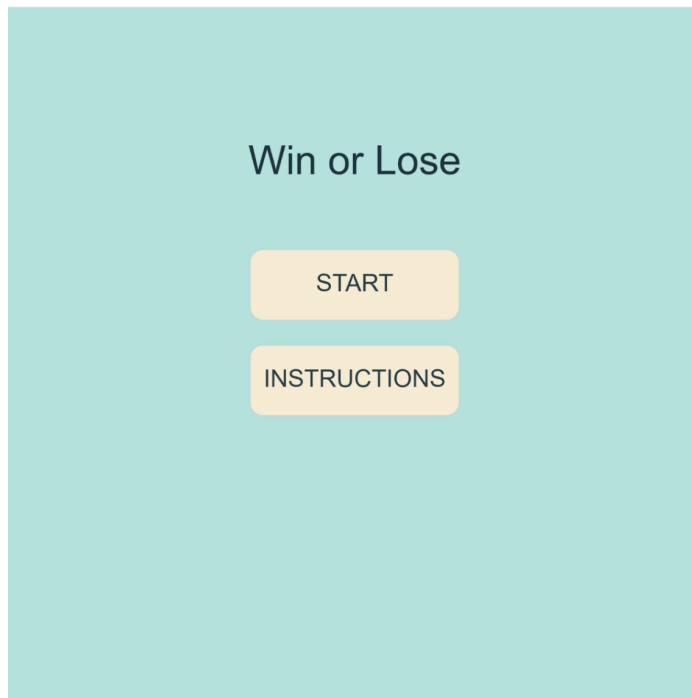


© 2026 Dr. Karen Cochrane & David Han · Built with p5.js

Win or Lose

GBDA302 • Week 3 — Game States, UI, Menus

Tip: use Enter / I on the start screen. Press R on win/lose to return.

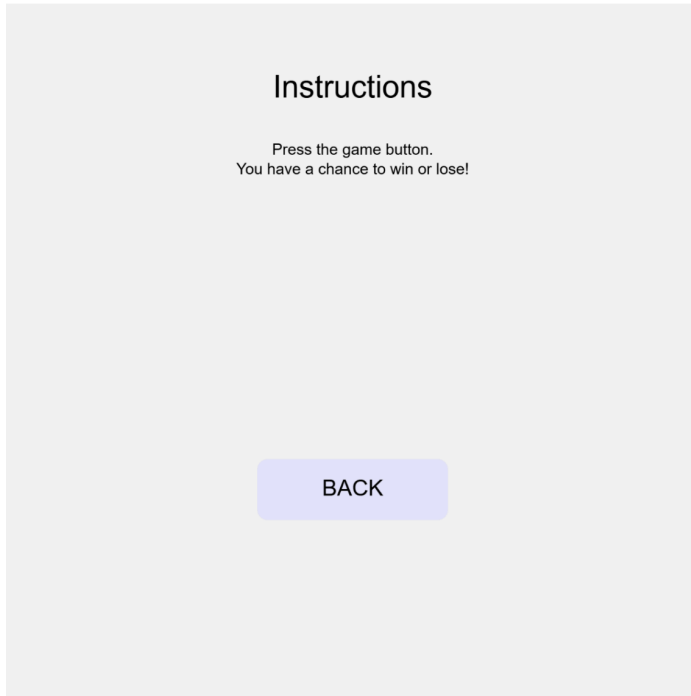


© 2026 Dr. Karen Cochrane & David Han · Built with p5.js

Win or Lose

GBDA302 • Week 3 — Game States, UI, Menus

Tip: use Enter / I on the start screen. Press R on win/lose to return.

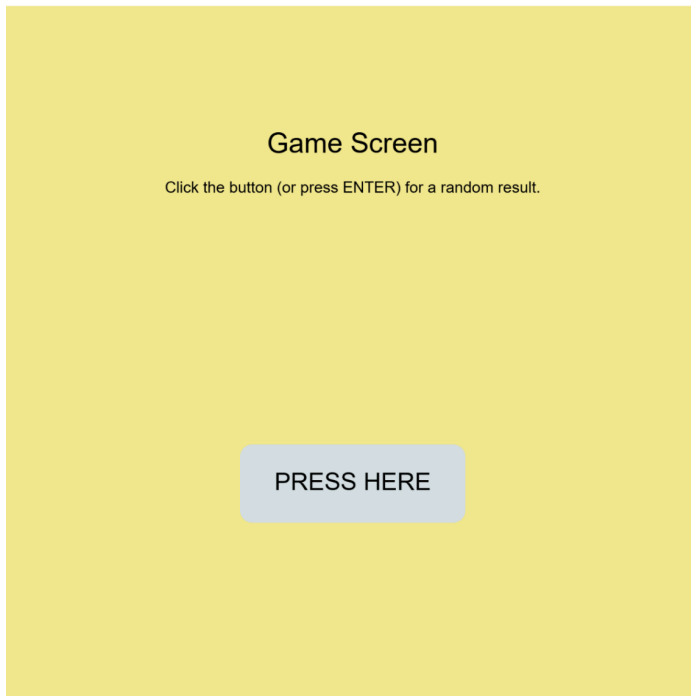


© 2026 Dr. Karen Cochrane & David Han · Built with p5.js

Modified game:

DC UNIVERSE

GBDA302 • Week 3 — Game States, UI, Menus

Tip: use Enter / I on the start screen. Press R on win/lose to return.

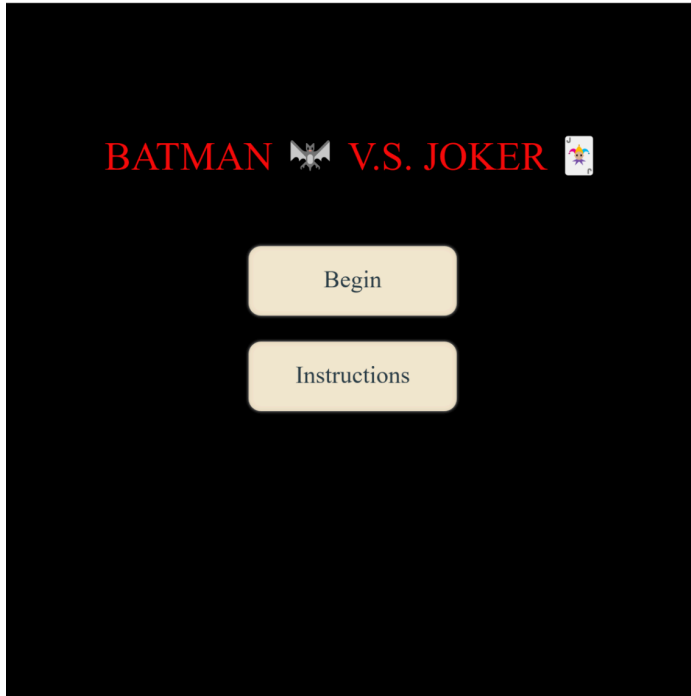


© 2026 Dr. Karen Cochrane & David Han · Built with p5.js

DC UNIVERSE

GBDA302 • Week 3 — Game States, UI, Menus

Tip: use Enter / I on the start screen. Press R on win/lose to return.

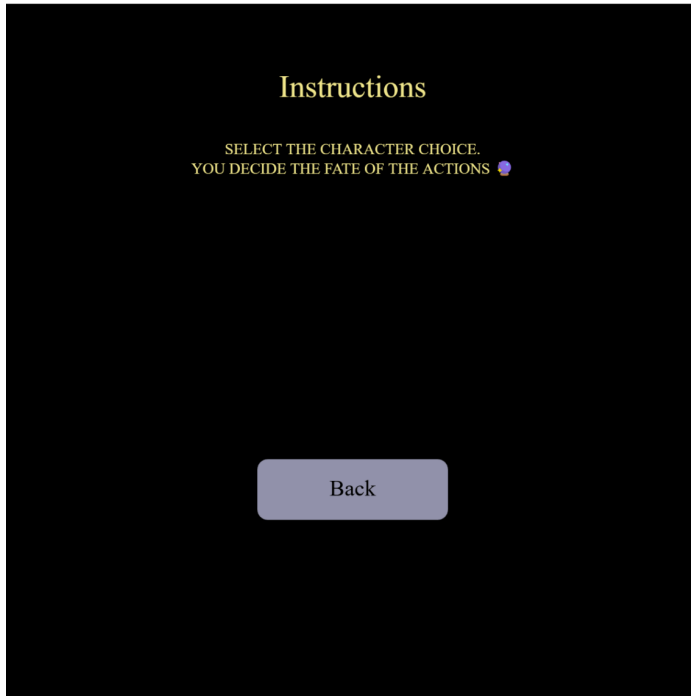


© 2026 Dr. Karen Cochrane & David Han · Built with p5.js

DC UNIVERSE

GBDA302 • Week 3 — Game States, UI, Menus

Tip: use Enter / I on the start screen. Press R on win/lose to return.

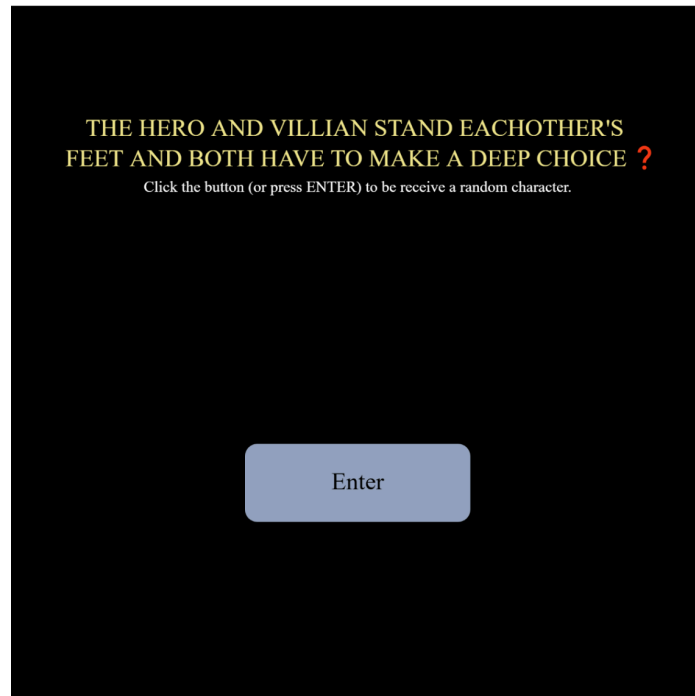


© 2026 Dr. Karen Cochrane & David Han · Built with p5.js

DC UNIVERSE

GBDA302 • Week 3 — Game States, UI, Menus

Tip: use Enter / I on the start screen. Press R on win/lose to return.

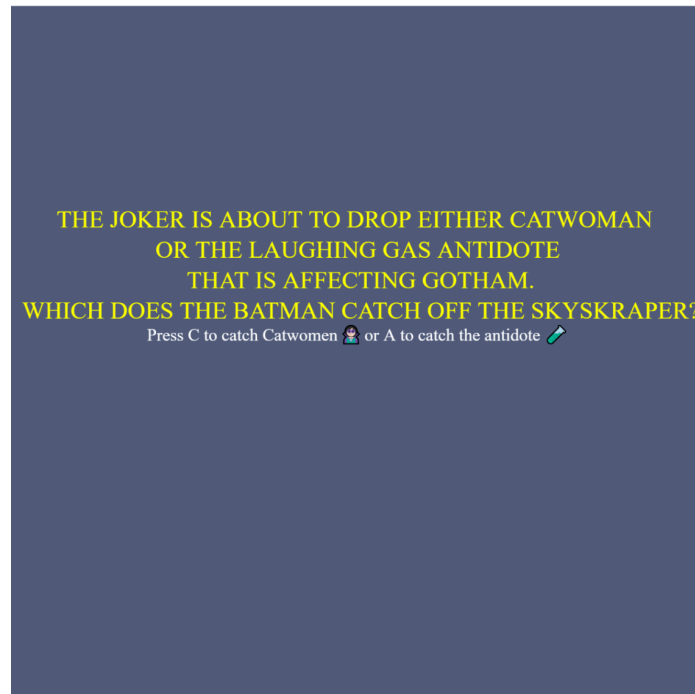


© 2026 Dr. Karen Cochrane & David Han · Built with p5.js

DC UNIVERSE

GBDA302 • Week 3 — Game States, UI, Menus

Tip: use Enter / I on the start screen. Press R on win/lose to return.

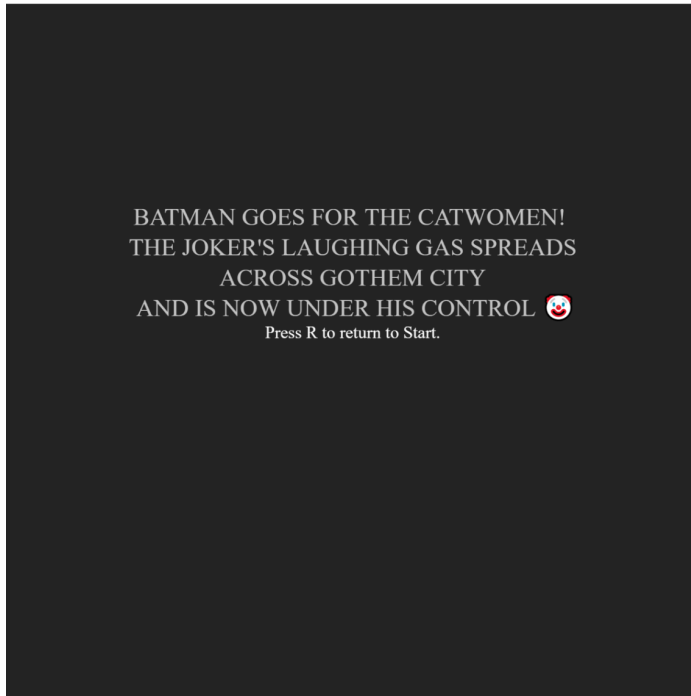


© 2026 Dr. Karen Cochrane & David Han · Built with p5.js

DC UNIVERSE

GBDA302 • Week 3 — Game States, UI, Menus

Tip: use Enter / I on the start screen. Press R on win/lose to return.

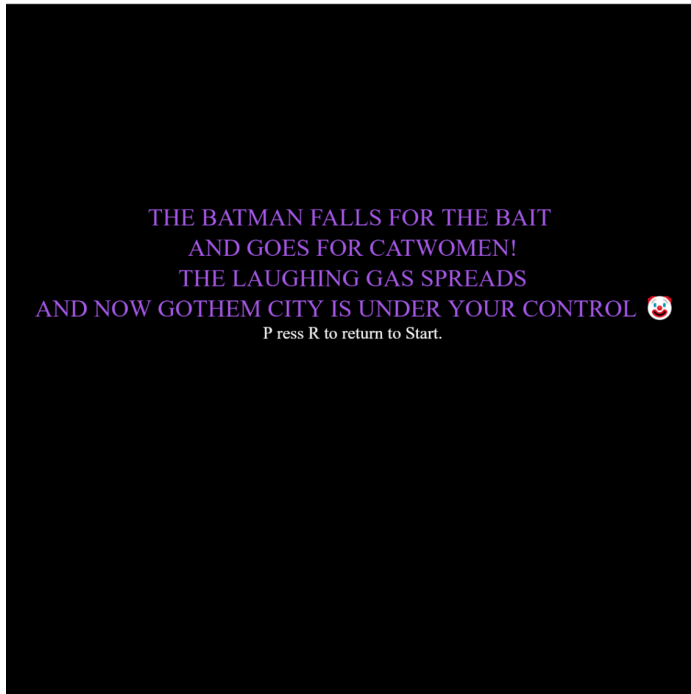


© 2026 Dr. Karen Cochrane & David Han · Built with p5.js

DC UNIVERSE

GBDA302 • Week 3 — Game States, UI, Menus

Tip: use Enter / I on the start screen. Press R on win/lose to return.

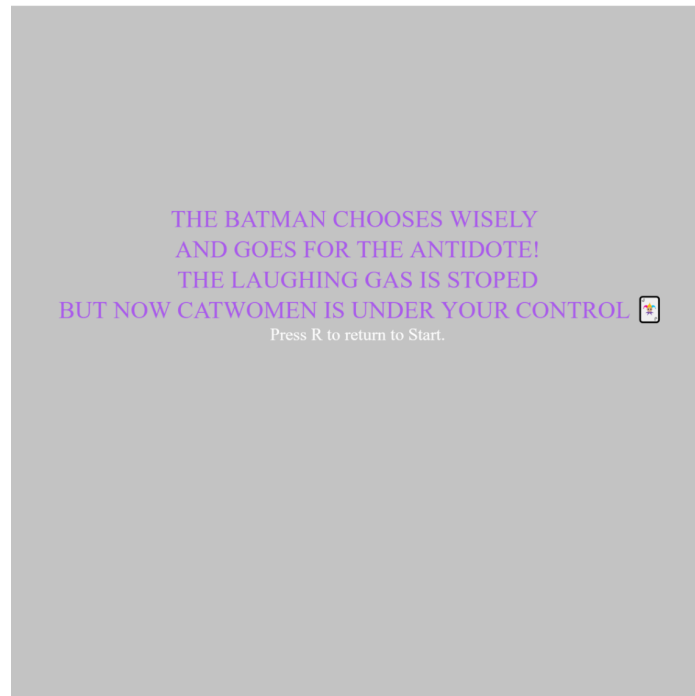


© 2026 Dr. Karen Cochrane & David Han · Built with p5.js

DC UNIVERSE

GBDA302 • Week 3 — Game States, UI, Menus

Tip: use Enter / I on the start screen. Press R on win/lose to return.

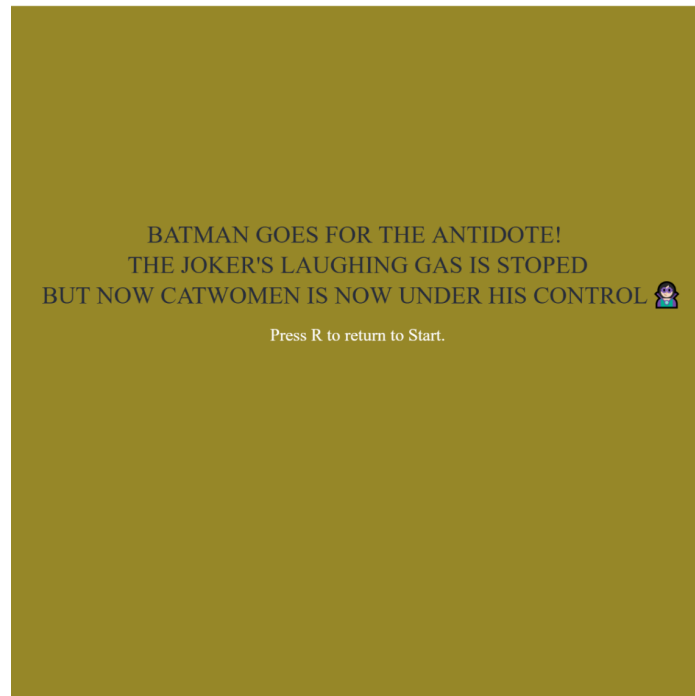

© 2026 Dr. Karen Cochrane & David Han · Built with p5.js

Code Changes

Updated code to unique story line

Path changes

```

11 11 // only when correctScreen === "lose"
12 12 function JokerDropArtidate() {
13 13 // Red-tinted background to communicate failure
14 14 - background(200, 200, 200);
15 15 + background(250, 250, 250);
16 16 - fill(255, 0, 0);
17 17 + fill(0, 0, 0);
18 18 textStyle(CONSIST, CONSIST);
19 19 // Main message
20 20 textStyle(40);
21 21 text[
22 22 - "The Joker chooses wisely and goes for the Artidate! The laughing gas is stopped but now Catewen is under your control ☹️",
23 23 + "Joker goes for the Artidate! The Joker's laughing gas is stopped but now Catewen is under his control ☹️",
24 24 width / 2,
25 25 0,
26 26 ];
27 27 // Instruction text
28 28 textStyle(20);
29 29 - text["Click or press K to return to Start.", width / 2, 100];
30 30 + text["PRESS K to return to Start.", width / 2, 100];
31 31 }
32 32 // -----

```

```

19 19 // Main message
20 20 textStyle(40);
21 21 text[
22 22 - "The Joker fails for the bait and goes for Catewen! The laughing gas spreads and now screen city is under your control ☹️",
23 23 + "Joker goes for the Catewen! The Joker's laughing gas spreads across screen city and is under his control ☹️",
24 24 width / 2,
25 25 0,
26 26 ];
27 27 // Instruction text
28 28 textStyle(20);
29 29 - text["Click or press K to return to Start.", width / 2, 100];
30 30 + text["PRESS K to return to Start.", width / 2, 100];
31 31 }
32 32 // -----

```

```

17 17 // y: 100, // y position (centre of the button)
18 18 w: 200, // width
19 19 h: 50, // height
20 20 - label: "PRESS HERE", // text shown on the button
21 21 + label: "K to START", // text shown on the button
22 22 }
23 23 // -----
24 24 // @ -25, 25 // const gameWin = {
25 25 // when correctScreen === "game"
26 26 function drawGame() {
27 27 // Set background colour for the game screen
28 28 - background(200, 200, 200);
29 29 + background(0);
30 30 // ---- title and instructions text ----
31 31 - fill(0); // black text
32 32 + fill(255, 255, 255); // black text
33 33 textStyle(40);
34 34 textStyle(CONSIST, CONSIST);
35 35 - text["Game Screen", width / 2, 100];
36 36 + text[
37 37 - "The hero and villain stand another's feet and both have to make a deep choice 🤔",
38 38 width / 2,
39 39 100,
40 40 ];
41 41 textStyle(30);
42 42 text[
43 43 - "Click the button (or press ENTER) for a random result.",
44 44 + "Click the button (or press ENTER) to be receive a random character.",
45 45 width / 2,
46 46 200,
47 47 ];

```

```

27 27 // Instruction text
28 28 textStyle(20);
29 29 - text["Click or press K to return to Start.", width / 2, 100];
30 30 + text["PRESS K to return to Start.", width / 2, 100];
31 31 }
32 32 // -----

```

```

14 14 // -----
15 15 // drawWin() is called from main.js
16 16 // only when correctScreen === "win"
17 17 - function drawGame() {
18 18 + function drawGame() {
19 19 // Green-tinted background to communicate success
20 20 background(0, 100, 100);
21 21 - fill(255, 0, 0);
22 22 + fill(0);
23 23 textStyle(CONSIST, CONSIST);
24 24 // Main success message
25 25 @ -25, 25 // function drawGame() {

```

```
@ -0,7 +0,7 @@ function setup() {  
A2 A2  
A3 A3 // Sets a default font for all text() calls.  
A4 A4 // (This can be changed later per-screen if you want.)  
A5 -   textFont('sans-serif');  
A6 +   textFont('Comic Sans');  
A8 }  
A9  
B0 B0 //  
  
+  
-  
@ -0,1,8 +0,1,8 @@ function mousePressed() {  
B1 B1 // This prevents errors if a screen doesn't implement a handler.  
B2 B2 else if (currentScreen === "win") winMousePressed();  
B3 B3 else if (currentScreen === "lose") loseMousePressed();  
B4 +     else {  
B5 +     }  
B7 B8 }  
B9 B9  
C0 C0 //  
C1 C1 -----  
  
D  
@ -10,7 +10,11 @@ function keyTyped() {  
102 101 else if (currentScreen === "intro") introKeyTyped();  
103 102 else if (currentScreen === "game") gameKeyTyped();  
104 103 else if (currentScreen === "win") winKeyTyped();  
105 +     else if (currentScreen === "tutorialIntro") tutorialKeyTyped();  
106 +     else if (currentScreen === "tutorialTutorial") tutorialKeyTyped();  
107 104 else if (currentScreen === "lose") loseKeyTyped();  
108 +     else if (currentScreen === "journeyLightInte") journeyKeyTyped(),  
109 +     else if (currentScreen === "journeyTutorial") journeyKeyTyped();  
110 111 }  
112 113  
114 114 //  
  
+  
-
```

```

1 // start.js
2
3 @ -12,12 +12,12 @@
4
5 12 12 // startScreen --- "start"
6 13 13 function drawstart() {
7 14 14 // background colour for the start screen
8 15 15 - background(100,220,200); // soft teal background
9 16 16 + background(0,0,0); // soft teal background
10 17 17 // ---- title text ----
11 18 18 - fill(0,0,0);
12 19 19 + fill(200,10,10);
13 20 20 textSize(40);
14 21 21 - text("Win or lose", width / 2, 100);
15 22 22 + text("Return to V.S. Room", width / 2, 100);
16 23 23 // ---- Buttons (data only) ----
17 24 24 // These objects store the position/size/label for each button.
18 25 25
19 26 26 @ -26,7 +26,7 @@ function drawstart() {
20 27 27 p: 100,
21 28 28 w: 200,
22 29 29 h: 80,
23 30 30 - label: "X1000",
24 31 31 + label: "X6600",
25 32 32
26 33 33 };
27 34 34
28 35 35 const instWts = {

```

```

1 // 20 20 100% win_20
2
3 @ -22,20 +22,20 @@ function draw() {
4
5     // Main success message
6     textSize(60);
7
8     - text("Yes Sir!", width / 2, 80);
9
10     + text(
11         + "The laser is about to drop either catman or the laughing gas antidote that is affecting Nathan. Which do you catch off the skytrapez!",
12         + width / 2,
13         + 80,
14         + );
15
16     // Instruction text
17     textSize(20);
18
19     - text("Click or press x to return to start.", width / 2, 80);
20     - }
21     -
22     - // -----
23     - // Main input for win screen
24     - // -----
25     - // My mouse click returns the player to the start screen
26     - function winMousePressed() {
27         - currentScreen = "start";
28
29         + text(
30         + "Click or press x to catch Catman 🐱 or h to catch the antidote 🧪",
31         + width / 2,
32         + 80,
33         + );
34     }
35
36     // -----

```

Fixed choice path

```

1 // @ -0,0 +0,0 @
2 // -----
3 // draw() is called from main.js
4 // only when curvetScreen == "lose"
5 - function draw() {
6 + function draw() {
7 // red-tinted background to communicate failure
8 background(100, 100, 100);
9
10 // @ -0,0 +0,0 @ function draw() {
11 // -----
12 // instruction test
13 fill(200, 200, 200);
14 textSize(20);
15 - text("Press R to return to Start.", width / 2, 100);
16 + text("Press R to return to Start.", width / 2, 100);
17 }
18 // -----
19
20

```

```

1 // @ -0,0 +0,0 @
2 // -----
3 // draw() is called from main.js
4 // only when curvetScreen == "lose"
5 - function draw() {
6 + function draw() {
7 // red-tinted background to communicate failure
8 background(100, 100, 100);
9
10 fill(100, 100, 100);
11 textSize(10000, 10000);
12
13 // main message
14 - textSize(80);
15 + textSize(80);
16 text(
17 - "Return game for the catman! The game's lighting gas spreads across surface city and is now under his control.",
18 + "RETURN GAME FOR THE CATMAN! THE GAME'S LIGHTING GAS SPREADS TO ACROSS SURFACE CITY (1) AND IS NOW UNDER HIS CONTROL.",
19 width / 2,
20 100,
21 );
22 // instruction test
23 fill(200, 200, 200);
24 textSize(20);
25 - text("Press R to return to Start.", width / 2, 100);
26 + text("Press R to return to Start.", width / 2, 100);
27 }
28 // -----
29
30

```

```

1 // @ -0,0 +0,0 @
2 // -----
3 // draw() is called from main.js
4 // only when curvetScreen == "lose"
5 - function draw() {
6 + function draw() {
7 // red-tinted background to communicate failure
8 background(100, 100, 100);
9
10 fill(100, 100, 100);
11 textSize(10000, 10000);
12
13 // main message
14 - textSize(80);
15 + textSize(80);
16 text(
17 - "Return game for the catman! The game's lighting gas spreads across surface city and is now under his control.",
18 + "RETURN GAME FOR THE CATMAN! THE GAME'S LIGHTING GAS SPREADS TO ACROSS SURFACE CITY (1) AND IS NOW UNDER HIS CONTROL.",
19 width / 2,
20 100,
21 );
22 // instruction test
23 fill(200, 200, 200);
24 textSize(20);
25 - text("Press R to return to Start.", width / 2, 100);
26 + text("Press R to return to Start.", width / 2, 100);
27 }
28 // -----
29
30

```

```

1 // @ -0,0 +0,0 @
2 // -----
3 // draw() is called from main.js
4 // only when curvetScreen == "lose"
5 - function draw() {
6 + function draw() {
7 // red-tinted background to communicate failure
8 background(100, 100, 100);
9
10 fill(100, 100, 100);
11 textSize(10000, 10000);
12
13 // main message
14 - textSize(80);
15 + textSize(80);
16 text(
17 - "Return game for the catman! The game's lighting gas spreads across surface city and is now under his control.",
18 + "RETURN GAME FOR THE CATMAN! THE GAME'S LIGHTING GAS SPREADS TO ACROSS SURFACE CITY (1) AND IS NOW UNDER HIS CONTROL.",
19 width / 2,
20 100,
21 );
22 // instruction test
23 fill(200, 200, 200);
24 textSize(20);
25 - text("Press R to return to Start.", width / 2, 100);
26 + text("Press R to return to Start.", width / 2, 100);
27 }
28 // -----
29
30

```

```

1 // @ -0,0 +0,0 @
2 // -----
3 // draw() is called from main.js
4 // only when curvetScreen == "lose"
5 - function draw() {
6 + function draw() {
7 // red-tinted background to communicate failure
8 background(100, 100, 100);
9
10 fill(100, 100, 100);
11 textSize(10000, 10000);
12
13 // main message
14 - textSize(80);
15 + textSize(80);
16 text(
17 - "Return game for the catman! The game's lighting gas spreads across surface city and is now under his control.",
18 + "RETURN GAME FOR THE CATMAN! THE GAME'S LIGHTING GAS SPREADS TO ACROSS SURFACE CITY (1) AND IS NOW UNDER HIS CONTROL.",
19 width / 2,
20 100,
21 );
22 // instruction test
23 fill(200, 200, 200);
24 textSize(20);
25 - text("Press R to return to Start.", width / 2, 100);
26 + text("Press R to return to Start.", width / 2, 100);
27 }
28 // -----
29
30

```

```

10 10  @ -15,15 +15,15 @
11 11  // only when currentScreen == "lose"
12 12  function gameOverGame() {
13 13  // Red-tinted background to communicate failure
14 14  - background(150, 50, 200);
15 15  + background(0);
16 16  - fill(0);
17 17  + fill(150, 50, 200);
18 18  textStyle(10000, 10000);
19 19  // Main message
20 20  textStyle(20);
21 21  text[
22 22  - "The station falls for the last! \n and gas for catbase! \n the laughing gas spreads \n and now some city is under your control [A]",
23 23  + "THE STATION FALLS FOR THE LAST! \n AND GAS FOR CATBASE! \n THE LAUGHING GAS SPREADS \n AND NOW SOME CITY IS UNDER YOUR CONTROL [A]",
24 24  width / 2,
25 25  0,
26 26  ];
27 27  // Instruction text
28 28  fill(200, 200, 200);
29 29  textStyle(20);
30 30  - text["Press R to return to start.", width / 2, 0];
31 31  + text["Press R to return to start.", width / 2, 0];
32 32  }
33 33  // -----

```

```

10 10  @ -15,15 +15,15 @ function drawGame() {
11 11  // Main success message
12 12  textStyle(20);
13 13  text[
14 14  - "The station stays in your key as you held CATBASE! \n and the laughing gas spreads that is affecting station. \n when do you drop off the
15 15  + "THE STATION STAYS IN YOUR KEY AS YOU HELD CATBASE! \n AND THE LAUGHING GAS SPREADS THAT IS AFFECTING STATION. \n WHEN DO YOU DROP OFF THE
16 16  + "STATION?",
17 17  width / 2,
18 18  0,
19 19  ];
20 20  // -----
21 21  @ -15,15 +15,15 @ function drawGame() {
22 22  text[
23 23  "Press C to drop catbase [A] or A to drop the antidote [B]",
24 24  width / 2,
25 25  0,
26 26  ];
27 27  // -----
28 28  // R is commonly used for "restart" in games
29 29  - function winKeyPressed() {
30 30  + function winKeyPressed() {
31 31  - if (key == "C" || key == "C") {
32 32  - currentScreen = "startAtCatbase";
33 33  + currentScreen = "gameOverGame";
34 34  }
35 35  - if (key == "A" || key == "A") {
36 36  - currentScreen = "startAtAntidote";
37 37  + currentScreen = "gameOverAntidote";
38 38  }
39 39  }
40 40  // -----
41 41  // R is commonly used for "restart" in games
42 42  - function winKeyPressed() {
43 43  + function winKeyPressed() {
44 44  - if (key == "C" || key == "C") {
45 45  - currentScreen = "startAtCatbase";
46 46  + currentScreen = "gameOverGame";
47 47  }
48 48  - if (key == "A" || key == "A") {
49 49  - currentScreen = "startAtAntidote";
50 50  + currentScreen = "gameOverAntidote";
51 51  }
52 52  }

```

```

10 10  @ -15,15 +15,15 @ function keyPressed() {
11 11  if (currentScreen == "start") startKeyPressed();
12 12  else if (currentScreen == "start") startKeyPressed();
13 13  else if (currentScreen == "game") gameKeyPressed();
14 14  else if (currentScreen == "win") winKeyPressed();
15 15  - else if (currentScreen == "startAtCatbase") startAtCatbaseKeyPressed();
16 16  - else if (currentScreen == "startAtAntidote") startAtAntidoteKeyPressed();
17 17  + else if (currentScreen == "win") winKeyPressed();
18 18  + else if (currentScreen == "startAtCatbase") startAtCatbaseKeyPressed();
19 19  + else if (currentScreen == "startAtAntidote") startAtAntidoteKeyPressed();
20 20  + else if (currentScreen == "gameOverGame") gameOverGameKeyPressed();
21 21  + else if (currentScreen == "gameOverAntidote") gameOverAntidoteKeyPressed();
22 22  - else if (currentScreen == "lose") loseKeyPressed();
23 23  - else if (currentScreen == "gameOverGame") gameOverGameKeyPressed();
24 24  - else if (currentScreen == "gameOverAntidote") gameOverAntidoteKeyPressed();
25 25  + else if (currentScreen == "gameOverGame") gameOverGameKeyPressed();
26 26  + else if (currentScreen == "gameOverAntidote") gameOverAntidoteKeyPressed();
27 27  }
28 28  // -----
29 29  // R is commonly used for "restart" in games
30 30  - function winKeyPressed() {
31 31  + function winKeyPressed() {
32 32  - if (key == "C" || key == "C") {
33 33  - currentScreen = "start";
34 34  + currentScreen = "start";
35 35  }
36 36  - if (key == "A" || key == "A") {
37 37  - currentScreen = "startAtCatbase";
38 38  + currentScreen = "startAtAntidote";
39 39  }
40 40  }
41 41  // -----
42 42  // R is commonly used for "restart" in games
43 43  - function winKeyPressed() {
44 44  + function winKeyPressed() {
45 45  - if (key == "C" || key == "C") {
46 46  - currentScreen = "start";
47 47  + currentScreen = "start";
48 48  }
49 49  - if (key == "A" || key == "A") {
50 50  - currentScreen = "startAtCatbase";
51 51  + currentScreen = "startAtAntidote";
52 52  }
53 53  }

```

```

10 10  @ -15,15 +15,15 @ function drawGame() {
11 11  text[
12 12  "Press C to catch catbase [A] or A to catch the antidote [B]",
13 13  width / 2,
14 14  0,
15 15  ];
16 16  // -----
17 17  // R is commonly used for "restart" in games
18 18  - function winKeyPressed() {
19 19  + function winKeyPressed() {
20 20  - if (key == "C" || key == "C") {
21 21  - currentScreen = "start";
22 22  + currentScreen = "start";
23 23  }
24 24  - if (key == "A" || key == "A") {
25 25  - currentScreen = "startAtCatbase";
26 26  + currentScreen = "startAtAntidote";
27 27  }
28 28  }
29 29  // -----
30 30  // R is commonly used for "restart" in games
31 31  - function winKeyPressed() {
32 32  + function winKeyPressed() {
33 33  - if (key == "C" || key == "C") {
34 34  - currentScreen = "start";
35 35  + currentScreen = "start";
36 36  }
37 37  - if (key == "A" || key == "A") {
38 38  - currentScreen = "startAtCatbase";
39 39  + currentScreen = "startAtAntidote";
40 40  }
41 41  }
42 42  // -----
43 43  // R is commonly used for "restart" in games
44 44  - function winKeyPressed() {
45 45  + function winKeyPressed() {
46 46  - if (key == "C" || key == "C") {
47 47  - currentScreen = "start";
48 48  + currentScreen = "start";
49 49  }
50 50  - if (key == "A" || key == "A") {
51 51  - currentScreen = "startAtCatbase";
52 52  + currentScreen = "startAtAntidote";
53 53  }
54 54  }

```

HTML Update



```
index.html
@@ -11,7 +11,7 @@
11 11 <body>
12 12 <header class="site-header">
13 13 <div class="wrap">
14 - <h1 class="title">Win or Lose</h1>
14 + <h1 class="title">DC UNIVERSE</h1>
15 15 <p class="subtitle">GBDA302 • Week 3 – Game States, UI, Menus</p>
16 16 </div>
17 17 </header>

main.js
@@ -82,10 +82,6 @@ function mousePressed() {
82 82 else if (currentScreen === "game") gameMousePressed();
83 83 // The ?.() means "call this function only if it exists"
84 84 // This prevents errors if a screen doesn't implement a handler.
85 - else if (currentScreen === "win") winMousePressed?.();
86 - else if (currentScreen === "lose") loseMousePressed?.();
87 - else {
88 - }
89 85 }
90 86
91 87 // -----
```

GenAI Documentation

No GenAI was used.