

## Prueba de función GET:

The screenshot shows the Postman interface with a workspace named "My Workspace". On the left sidebar, there are sections for "Collections", "APIs", "Environments", "Mock Servers", "Monitors", "Flows", and "History". The "Collections" section is active, showing a collection named "My first collection" with two folders: "First folder inside collection" and "Second folder inside collection". Each folder contains a "GET" request. A prompt "Create a collection for your requests" is visible, explaining that a collection groups related requests and allows setting common authorization, tests, scripts, and variables.

The main panel displays a GET request to "http://localhost:8080". The request is saved, and the "Send" button is visible. Below the request, the "Query Params" section is empty. The "Body" tab is selected, showing a status of "200 OK", a time of "8 ms", and a size of "267 B". The response is displayed in "Pretty" format, showing a single line with a tab character.

KEY	VALUE	DESCRIPTION
Key	Value	Description

Body: 200 OK, 8 ms, 267 B. Save Response. Pretty, Raw, Preview, Visualize, JSON.

The screenshot shows the Postman interface with the same workspace. The "Collections" section is still active. The main panel displays a GET request to "http://localhost:8080/12345". The request is saved, and the "Send" button is visible. Below the request, the "Query Params" section is empty. The "Body" tab is selected, showing a status of "404 Not Found", a time of "11 ms", and a size of "346 B". The response is displayed in "Pretty" format, showing a JSON object with a message.

KEY	VALUE	DESCRIPTION
Key	Value	Description

Body: 404 Not Found, 11 ms, 346 B. Save Response. Pretty, Raw, Preview, Visualize, JSON.

```
1 {
2   "message": "No se puede encontrar el elemento con esa identificación!"
3 }
```

## Prueba de función POST:

Home Workspaces API Network Explore Search Postman Invite Upgrade

My Workspace New Import Overview POST http://localhost:8080/ No Environment

Collections + Your collection + Authorization Type API Key

Create a collection for your requests

A collection lets you group related requests and easily set common authorization, tests, scripts, and variables for all requests in it.

Create Collection

POST http://localhost:8080/ Save Send

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies Beautify

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "identificacion": "1",
3   "nombre": "Joel Parraga",
4   "cedula": "1314789423"
5 }
```

Body Cookies Headers (8) Test Results Status: 200 OK Time: 8 ms Size: 390 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "message": "Datos insertado correctamente",
3   "response": {
4     "identificacion": "1",
5     "nombre": "Joel Parraga",
6     "cedula": "1314789423"
7   }
8 }
```

Online Find and Replace Console Cookies Capture requests Continue learning Runner Trash

Home Workspaces API Network Explore Search Postman Invite Upgrade

My Workspace New Import Overview GET http://localhost:8080/ No Environment

Collections + Your collection + Authorization Type API Key

Create a collection for your requests

A collection lets you group related requests and easily set common authorization, tests, scripts, and variables for all requests in it.

Create Collection

GET http://localhost:8080/ Save Send

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies Beautify

none form-data x-www-form-urlencoded raw binary GraphQL JSON


```
1 {
2   "identificacion": "1",
3   "nombre": "Joel Parraga",
4   "cedula": "1314789423"
5 }
```

Body Cookies Headers (8) Test Results Status: 200 OK Time: 7 ms Size: 337 B Save Response


Pretty Raw Preview Visualize JSON

```
1 {
2   "identificacion": "1",
3   "nombre": "Joel Parraga",
4   "cedula": "1314789423"
5 }
```

Online Find and Replace Console Cookies Capture requests Continue learning Runner Trash

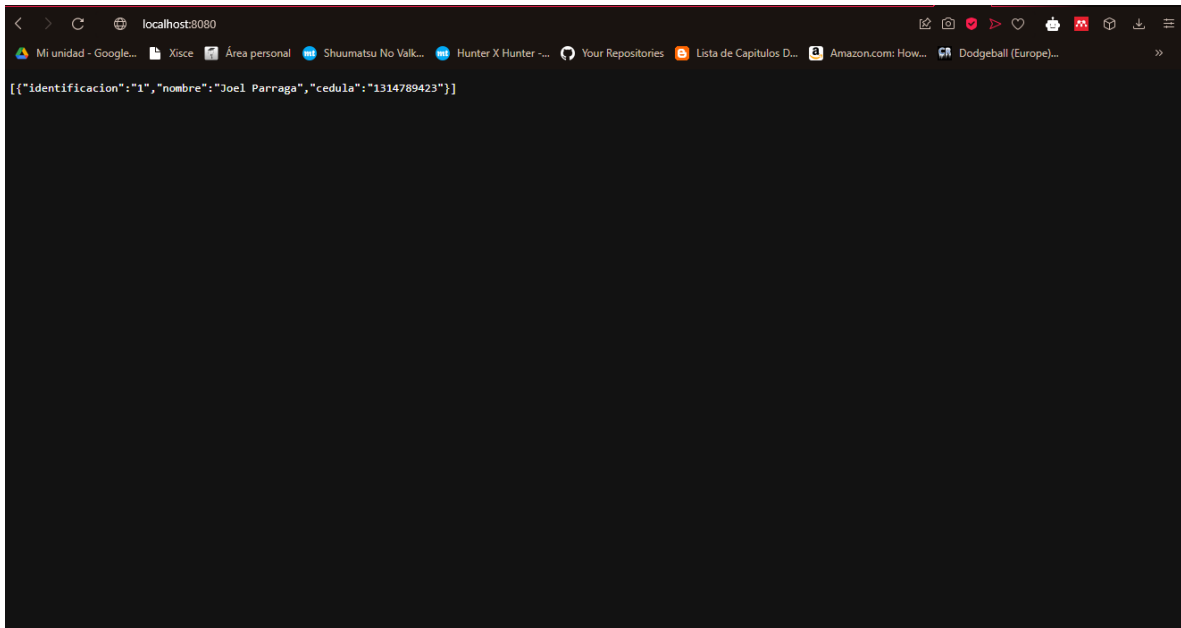

## Prueba de función PUT:

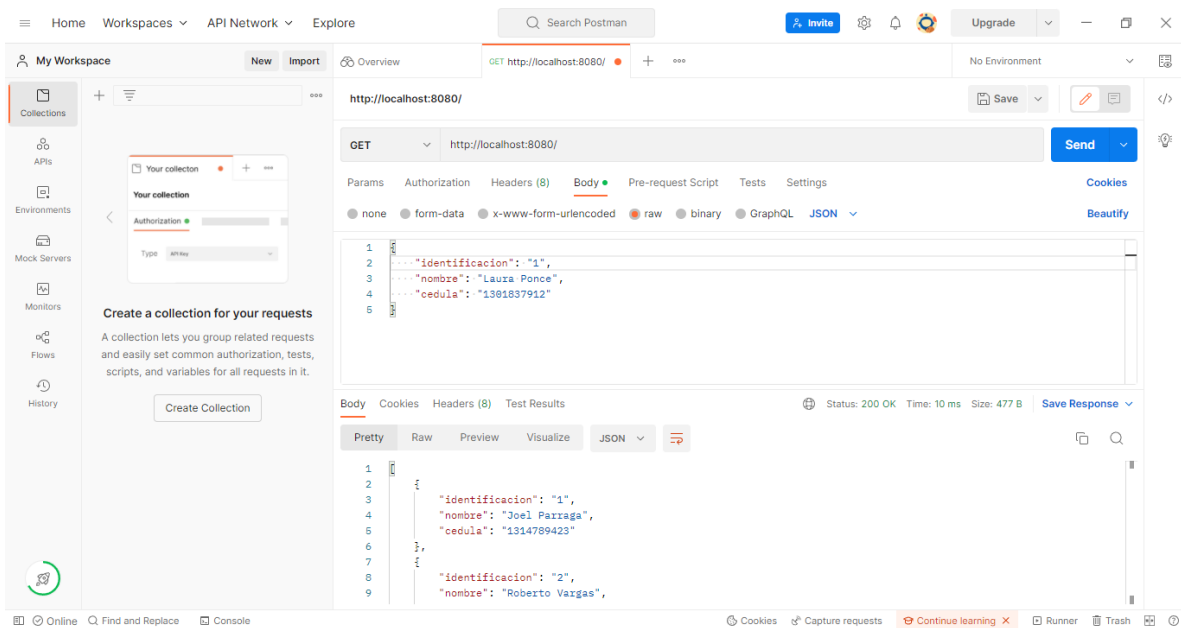

The screenshot shows the Postman interface with a PUT request to `http://localhost:8080/`. The request body is a JSON object: `{ "identificacion": "1", "nombre": "Sofia Palacios", "cedula": "1314789556" }`. The response is a 200 OK status with a JSON body: `{ "message": "dato modificado correctamente", "response": { "identificacion": "1", "nombre": "Sofia Palacios", "cedula": "1314789556" } }`. The status bar at the bottom indicates "Status: 200 OK Time: 12 ms Size: 393 B".

The screenshot shows the Postman interface with a GET request to `http://localhost:8080/`. The response is a 200 OK status with a JSON body: `{ "identificacion": "1", "nombre": "Sofia Palacios", "cedula": "1314789556", "identificacion": "2", "nombre": "Roberto Vargas" }`. The status bar at the bottom indicates "Status: 200 OK Time: 8 ms Size: 479 B".

Prueba de función DELETE:

Home Workspaces API Network Explore Search Postman Invite Upgrade

My Workspace New Import Overview **DEL http://localhost:8080/2** No Environment

Collections + Your collection +

Authorization ☒ API Key

Create a collection for your requests

A collection lets you group related requests and easily set common authorization, tests, scripts, and variables for all requests in it.

Create Collection

DELETE http://localhost:8080/2 Save Send

Params Authorization Headers (8) **Body** Pre-request Script Tests Settings Cookies Beautify

none form-data x-www-form-urlencoded **raw** binary GraphQL JSON

```
1 {
2   "identificacion": "1",
3   "nombre": "Sofia Palacios",
4   "cedula": "1314789556"
5 }
```

Body Cookies Headers (8) Test Results Status: 200 OK Time: 11 ms Size: 319 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "response": "Se elimin  el estudiante con  xito!"
3 }
```

Online Find and Replace Console Cookies Capture requests Continue learning Runner Trash

Home Workspaces API Network Explore Search Postman Invite Upgrade

My Workspace New Import Overview **GET http://localhost:8080/** No Environment

Collections + Your collection +

Authorization ☒ API Key

Create a collection for your requests

A collection lets you group related requests and easily set common authorization, tests, scripts, and variables for all requests in it.

Create Collection

GET http://localhost:8080/ Save Send

Params Authorization Headers (8) **Body** Pre-request Script Tests Settings Cookies Beautify

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "identificacion": "1",
3   "nombre": "Sofia Palacios",
4   "cedula": "1314789556"
5 }
```

Body Cookies Headers (8) Test Results Status: 200 OK Time: 7 ms Size: 408 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "identificacion": "1",
3   "nombre": "Sofia Palacios",
4   "cedula": "1314789556"
5 },
6 {
7   "identificacion": "3",
8   "nombre": "Lauza Ponce",
9 }
```

Online Find and Replace Console Cookies Capture requests Continue learning Runner Trash

