

Bruno Tests — Northwind Backend

Abschlussprojekt: Bestellungen ins Northwind-Backend integrieren

Test 1: GET /orders

Methode: GET | URL: <http://localhost:8765/orders> | Status: 200 OK | Ergebnis: JSON-Liste aller Bestellungen


The screenshot shows the Bruno API client interface. On the left, a sidebar lists collections under 'My Workspace'. The 'Northwind' collection is expanded, showing three tests: 'GET GET alle Bestellungen', 'GET GET /orders/{id}', and 'GET GET /orders/not found'. The main panel displays the selected test 'GET http://localhost:8765/orders'. The 'Params' tab is active, showing a table with columns 'Name' and 'Value'. The 'Response' tab shows a successful 200 OK status with a JSON array of three order objects. The status bar at the bottom indicates '200 OK 139ms 128.93KB'.

Name	Value
Name	Value

```
1  [
2  {
3    "orderId": 10248,
4    "customerId": "VINET",
5    "orderDate": "1996-07-04",
6    "shipName": "Vins et alcools Chevalier",
7    "shipCity": "Reims",
8    "shipCountry": "France",
9    "orderDetails": []
10 },
11 {
12   "orderId": 10249,
13   "customerId": "TOMSP",
14   "orderDate": "1996-07-05",
15   "shipName": "Toms Spezialitäten",
16   "shipCity": "Münster",
17   "shipCountry": "Germany",
18   "orderDetails": []
19 },
20 {
21   "orderId": 10250,
22   "customerId": "HANAR",
23   "orderDate": "1996-07-08",
24   "shipName": "Hanari Carnes".
```

Test 2: GET /orders/10248

Methode: GET | URL: <http://localhost:8765/orders/10248> | Status: 200 OK | Ergebnis: Bestellung inkl. Positionen

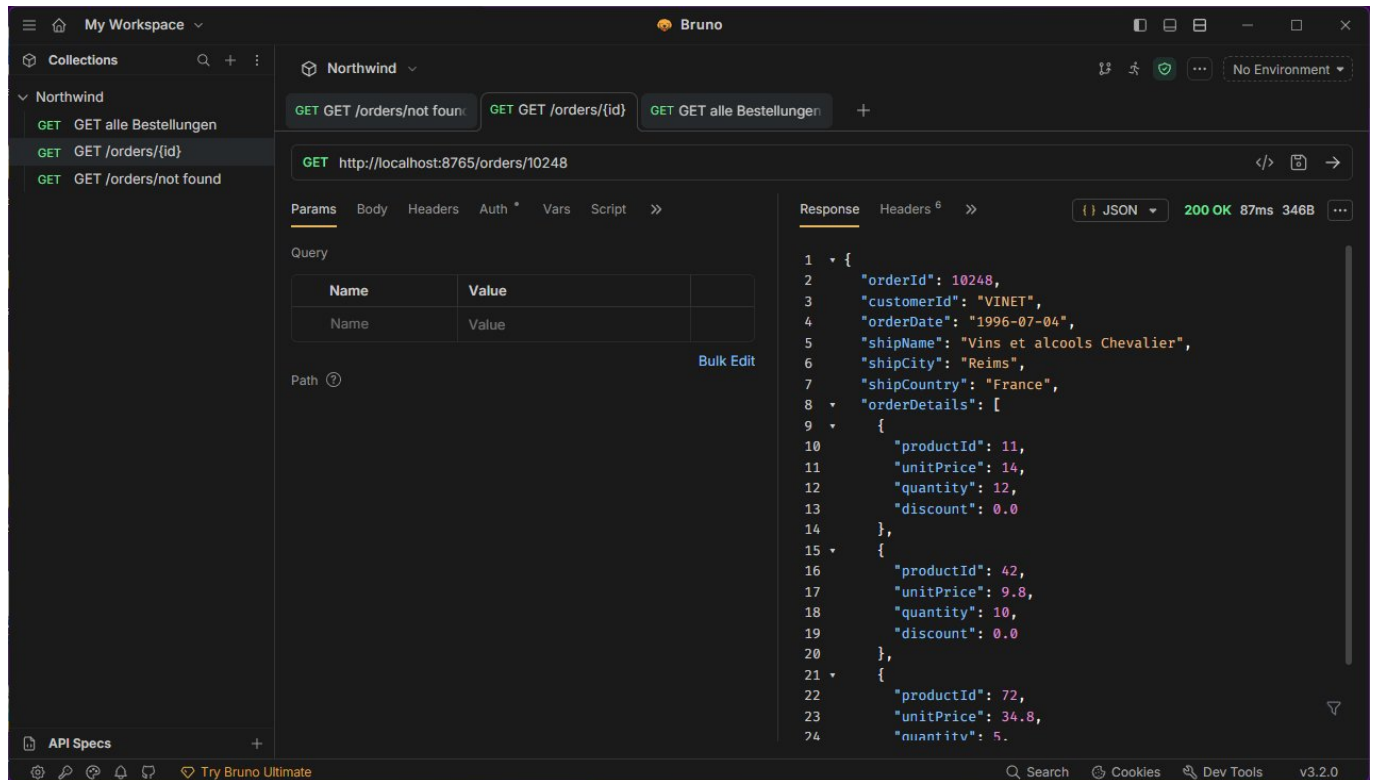

Test 3: GET /orders/99999999

Methode: GET | URL: <http://localhost:8765/orders/99999999> | Status: 404 Not Found | Ergebnis: Leerer Body

