

pgAdmin 4

Dashboard Properties SQL Statistics Dependencies Dependents clima_alerta/postgres@PostgreSQL 14

Query Editor Query History Scratch Pad

```

1 SELECT COUNT(*) AS total_usuarios
2 FROM Usuario;
3
4 SELECT idTipoEvento, COUNT(*) AS total_eventos
5 FROM Evento
6 GROUP BY idTipoEvento
7 ORDER BY idTipoEvento;
8
9 (
10 SELECT 'Mais antigo' AS tipo, idEvento, titulo, dataHora, status
11 FROM Evento
12 ORDER BY dataHora ASC
13 LIMIT 1
14 )
15 UNION ALL
16 (
17 SELECT 'Mais recente' AS tipo, idEvento, titulo, dataHora, status
18 FROM Evento
19 ORDER BY dataHora DESC
20 LIMIT 1
21 );
22
23 SELECT AVG(quantidade) AS media_registros_por_cidade
24 FROM (
25 SELECT cidade, COUNT(*) AS quantidade
26 FROM Localizacao
27 GROUP BY cidade
28 ) AS dados;

```

Data Output Explain Messages Notifications

total_usuarios	bigint
1	4

Successfully run. Total query runtime: 37 msec. 1 rows affected.

pgAdmin 4

Dashboard Properties SQL Statistics Dependencies Dependents clima_alerta/postgres@PostgreSQL 14

Query Editor Query History Scratch Pad

```



1 SELECT COUNT(*) AS total_usuarios
2 FROM Usuario;
3
4 SELECT idTipoEvento, COUNT(*) AS total_eventos
5 FROM Evento
6 GROUP BY idTipoEvento
7 ORDER BY idTipoEvento;
8
9 (
10 SELECT 'Mais antigo' AS tipo, idEvento, titulo, dataHora, status
11 FROM Evento
12 ORDER BY dataHora ASC
13 LIMIT 1
14 )
15 UNION ALL
16 (
17 SELECT 'Mais recente' AS tipo, idEvento, titulo, dataHora, status
18 FROM Evento
19 ORDER BY dataHora DESC
20 LIMIT 1
21 );
22
23 SELECT AVG(quantidade) AS media_registros_por_cidade
24 FROM (
25 SELECT cidade, COUNT(*) AS quantidade
26 FROM Localizacao
27 GROUP BY cidade
28 ) AS dados;

```

Data Output Explain Messages Notifications

idtipoevento	total_eventos
integer	bigint
1	1
2	1
3	1
4	1

Successfully run. Total query runtime: 41 msec. 4 rows affected.

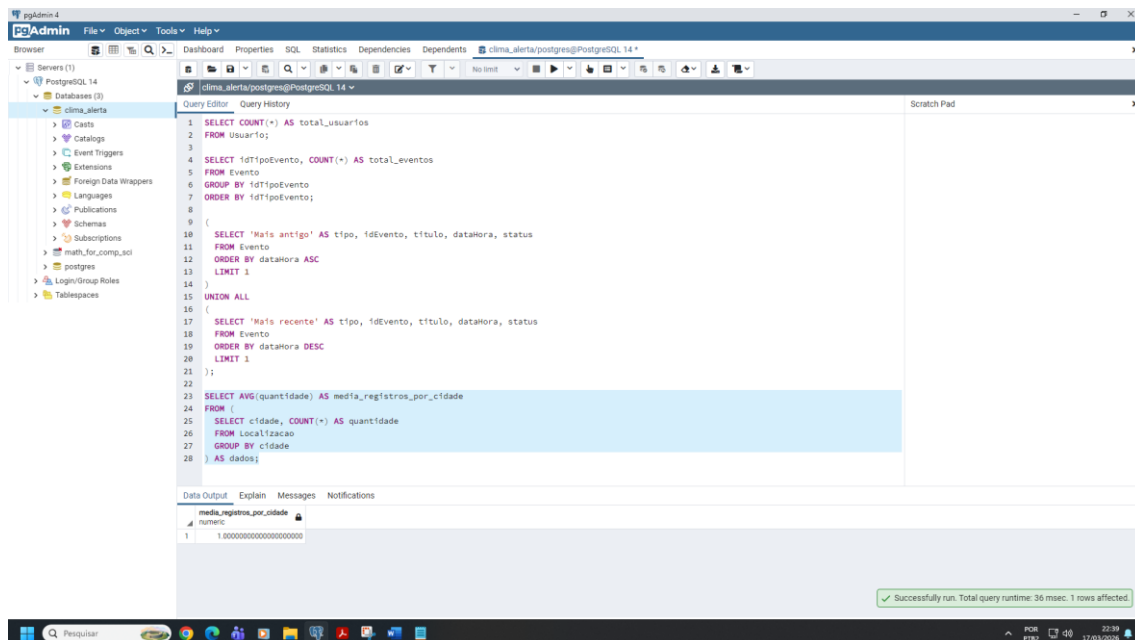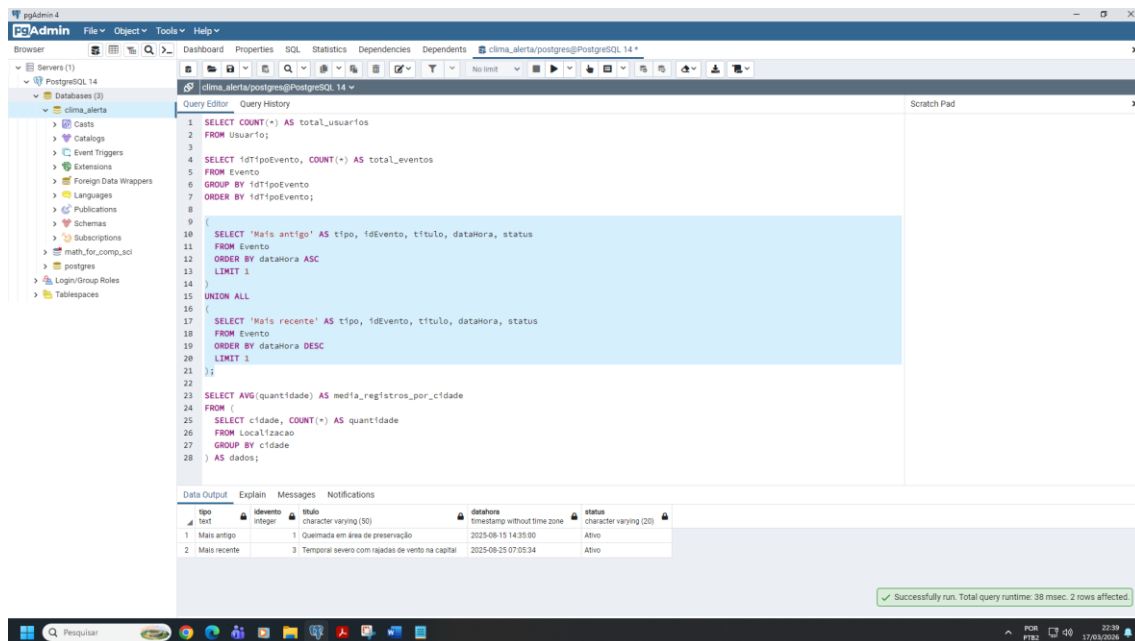

SELECT COUNT(*) AS total_usuarios

FROM Usuario;

SELECT idTipoEvento, COUNT(*) AS total_eventos

FROM Evento

GROUP BY idTipoEvento

ORDER BY idTipoEvento;

(

```
SELECT 'Mais antigo' AS tipo, idEvento, titulo, dataHora, status
FROM Evento
ORDER BY dataHora ASC
LIMIT 1
)
UNION ALL
(
SELECT 'Mais recente' AS tipo, idEvento, titulo, dataHora, status
FROM Evento
ORDER BY dataHora DESC
LIMIT 1
);
```

```
SELECT AVG(quantidade) AS media_registros_por_cidade
FROM (
SELECT cidade, COUNT(*) AS quantidade
FROM Localizacao
GROUP BY cidade
) AS dados;
```