

Hybrid Cellular Automata for Avascular Tumour Growth

Paper Analysis and Implementation

Gianluca Panzani

University of Pisa - Computer Science AI

March 20, 2026

Computational Models for Complex Systems

Presentation structure

Part I - Paper (Gerlee & Anderson, 2007)

- Paper goal
- Modeling workflow
- Architecture and equations
- Main results

Part II - Implementation of the oxygen concentration model

- Implementation of the model (`model.py`)
- ANN training and default-weight issue
- Multi-seed simulations (`sim_over_multiple_seed.ipynb`)
- Results and differences with the paper

Paper: Gerlee & Anderson (2007)

General view

Main objective

- Model **avascular tumour growth** with explicit clonal evolution.
- Study how **oxygen availability** changes morphology, growth, and phenotype selection.


Hybrid architecture

- **Discrete layer**: cellular automaton on a lattice (one cell per site).
- **Continuous layer**: reaction-diffusion fields (oxygen, glucose, hydrogen ions).

Core modeling idea

- Each cell has an evolvable **ANN-based response** policy.
- Cell division introduces **mutations** in ANN parameters.

Artificial NN architecture

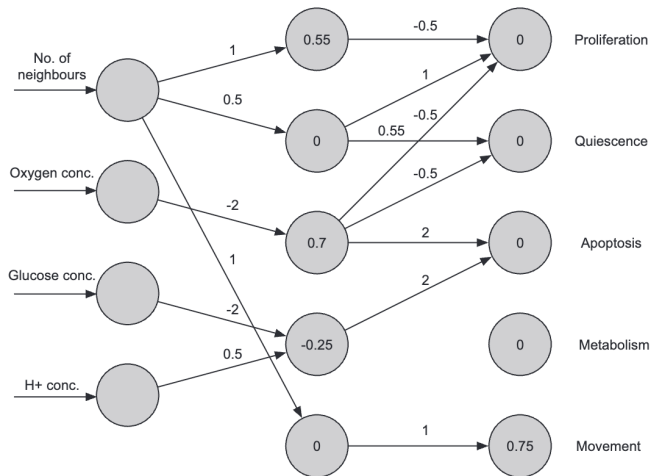

Dynamic model as a coupled system

Full model formulation

$$\begin{cases} \partial_t c = D_c \Delta c - f_c(s, R), \\ \partial_t g = D_g \Delta g - f_g(s, R), \\ \partial_t h = D_h \Delta h + f_h(s, R), \\ V_j = T\left(\sum_k w_{jk} x_k - \theta_j\right), \quad O_i = T\left(\sum_j w_{ij} V_j - \phi_i\right), \\ A_{ij}(t) = \arg \max\{O_P, O_Q, O_A\}, \\ s_{ij}(t + \Delta t) = \mathcal{U}\left(s_{ij}(t), A_{ij}(t), \mathcal{N}_{ij}(t), c, g, h\right), \\ \omega_{\text{child}} = \omega_{\text{parent}} + m \odot \xi, \quad m_k \sim \text{Bernoulli}(p), \quad \xi_k \sim \mathcal{N}(0, \sigma^2). \end{cases}$$

Metabolic modulation (paper Eq. 1)

$$F(R) = \max\left(k(R - T_r) + 1, 0.25\right).$$

Non-dimensionalization

Change of variables

$$\tilde{x} = \frac{x}{L}, \quad \tilde{t} = \frac{t}{\tau}, \quad \tilde{c} = \frac{c}{c_0}, \quad \tilde{g} = \frac{g}{g_0}, \quad \tilde{h} = \frac{h}{h_0}.$$

Non-dimensional parameters

$$\tilde{D}_i = \frac{D_i \tau}{L^2}, \quad \tilde{r}_c = \frac{\tau n_0 r_c}{c_0}, \quad \tilde{r}_g = \frac{\tau n_0 r_g}{g_0}, \quad \tilde{r}_h = \frac{\tau n_0 r_h}{h_0}.$$

- In the paper, simulations are run in these non-dimensional variables.
- In our project, parameters such as c_0 , D_c , D_t , d , r_c are used in this normalized setting.

Simulation

Protocol

- Lattice of size $N = 400$ (initially 4 central cells).
- Oxygen concentration levels: c_0 , $c_0/2.5$, $c_0/10$.
- 20 runs with different seeds.
- Plots of the results.

Measured outputs

- Total tumour cells (alive + dead).
- Invasiveness of the tumour.
- Shannon diversity index:

$$H(t) = - \sum_k p_k(t) \log p_k(t).$$

- Comparison plots between different oxygen levels.

Simulation

Single simulation step

```
while t < T:
  for cell in living_cells:
    n <- cell.count_neighbors()
    c, g, h <- cell.get_state()
    o <- cell.ANN(n, c, g, h)
    a <- argmax(o.p, o.a, o.q)
    cell.update_state(a)
  t <- t + dt
```

Simulation step: update all living cells once, then advance time by Δt .

Paper results: growth and morphology

Observed regimes

- $c_0/10$: early hypoxia and fingered morphology.
- $c_0/2.5$: delayed death onset and weaker fingering.
- c_0 : rounder growth with necrotic core + viable rim.

Reference quantitative scale at $t = 100$ (paper discussion)


$$N_{c_0} \approx 5 \times 10^4, \quad N_{c_0/10} \approx 1 \times 10^4.$$

Project Implementation


Implementation of the model (model.py)

Implemented model scope

- Oxygen-only reduced model.
- States: EMPTY, PROLIFERATING, QUIESCENT, NECROTIC, APOPTOTIC.
- ANN input reduced to $\epsilon = [n_{\text{neighbors}}, c]$.

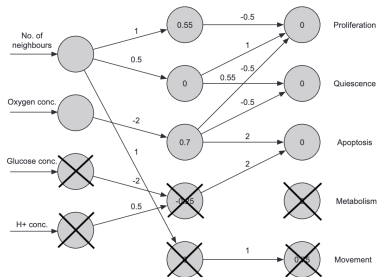

Implementation diagram

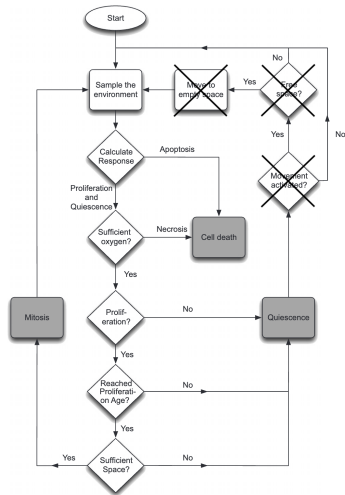

Default parameters used

Params defaults from model.py

Group	Values
Lattice/runtime	$N = 400$, $\text{seed_radius} = 4$, $\text{steps} = 200$, $\text{rng_seed} = 0$
Oxygen field	$c_0 = 1.0$, $D_c = 0.05$, $\Delta t = 0.2$, $d = 1.0$
Uptake/modulation	$r_c = 0.4$, $q = 5.0$, $T_r = 0.675$, $k = 6.0$
Thresholds	$c_{\text{apoptosis}} = 0.15$, $n_{\text{quiescence}} = 3.0$
Cell cycle	$\Delta t_{\text{age}} = 1.0$, $A_p = 1.0$, $A_{p,s} = 0.5$
Mutation	$p = 0.01$, $s = 0.25$

Note

These defaults are exactly the ones used when notebooks instantiate `p = Params()`.


ANN implementation and default-weight issue

ann_training.ipynb pipeline


- Generate 30k samples from rule labels: A if low oxygen, else P if low crowding, else Q.
- Train ANN with mini-batch gradient descent and early stopping.
- Save trained parameters to `.env_ann_params`.

Observed issue and fix


- Default ANN (untrained) does not reproduce target policy: accuracy ≈ 0.5404 , recall_P ≈ 0.334 , recall_A ≈ 0.200 .
- Trained ANN solves it: accuracy 0.9994, balanced accuracy 0.9987, macro F1 0.9991, ROC-AUC 1.0000.

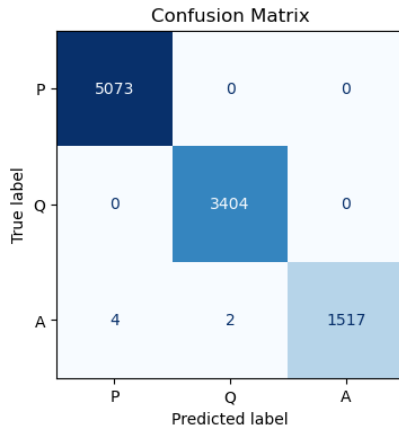

ANN decision boundary before training


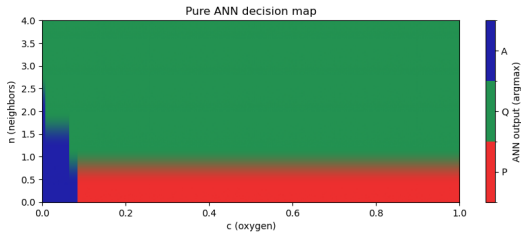


Pre-training ANN map

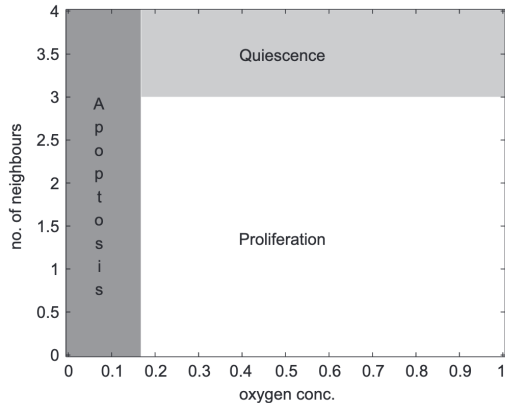

Reference decision boundary

ANN decision boundary after training

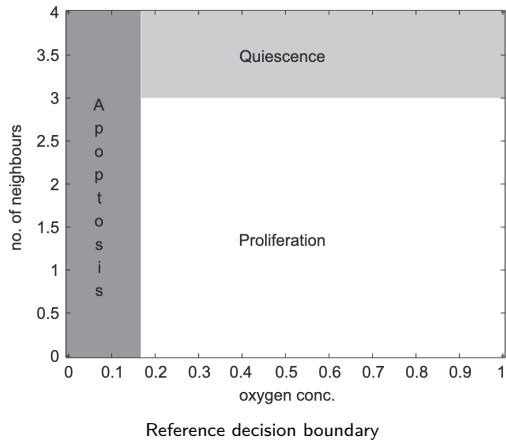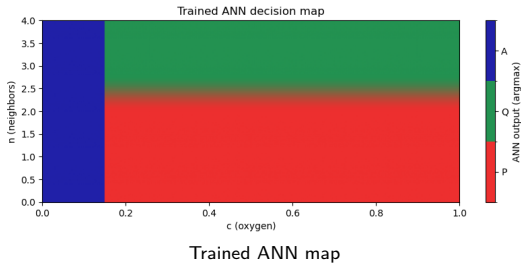

Simulations (`sim_over_multiple_seed.ipynb`)



Multi-seed protocol

- Load trained ANN parameters.
- Simulate 20 seeds for each oxygen case: c_0 , $c_0/2.5$, $c_0/10$.
- Aggregate trajectories as mean $\pm$ std.




Collected outputs

- Total tumour cells over time.
- Invasive distance over time.
- Shannon diversity over time.
- Summary table at $t = 100$.




Population dynamics across oxygen cases (1/2)

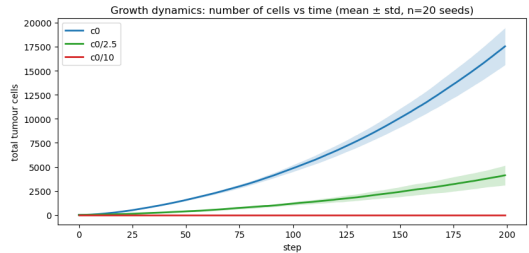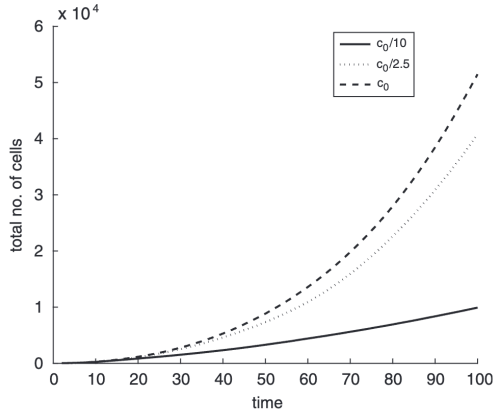

Population dynamics across oxygen cases (2/2)



Oxygen and necrotic percentage across oxygen cases



Results

Tumour size (mean $\pm$ std)

Oxygen case	Mean tumour size	Std
c_0	4772.05	340.78
$c_0/2.5$	1158.40	159.04
$c_0/10$	0.00	0.00

Trend

Lower oxygen $\Rightarrow$ lower growth and stronger stress effects.

Results

What is consistent

- Correct qualitative ordering across oxygen conditions.
- Oxygen clearly controls growth/invasion behavior.

What differs quantitatively

- Our sizes are smaller (e.g., $\sim 4.8 \times 10^3$ vs paper $\sim 5 \times 10^4$ at $t = 100$, c_0 case).
- In our setup, $c_0/10$ collapses to zero by $t = 100$.

Main reasons

- Reduced oxygen-only subsystem and simplified ANN I/O.
- Different calibration of uptake, age, and effective time-scale.
- Stricter starvation dynamics in our step-wise update.

Conclusions

Paper side

- Hybrid CA-PDE framework explains oxygen-driven morphology and selection.

Implementation side

- Reproducible implementation with trained ANN and multi-seed analysis.
- Qualitative agreement achieved; quantitative calibration remains open.

References

- P. Gerlee, A.R.A. Anderson (2007), *An evolutionary hybrid cellular automaton model of solid tumour growth*, Journal of Theoretical Biology 246:583–603.
- Project files: `simulation/model.py`, `simulation/ann_training.ipynb`, `simulation/sim_over_multiple_seed.ipynb`, `simulation/utils.py`.