Architecture Pomodoro ONE

* Transitions (state machine):

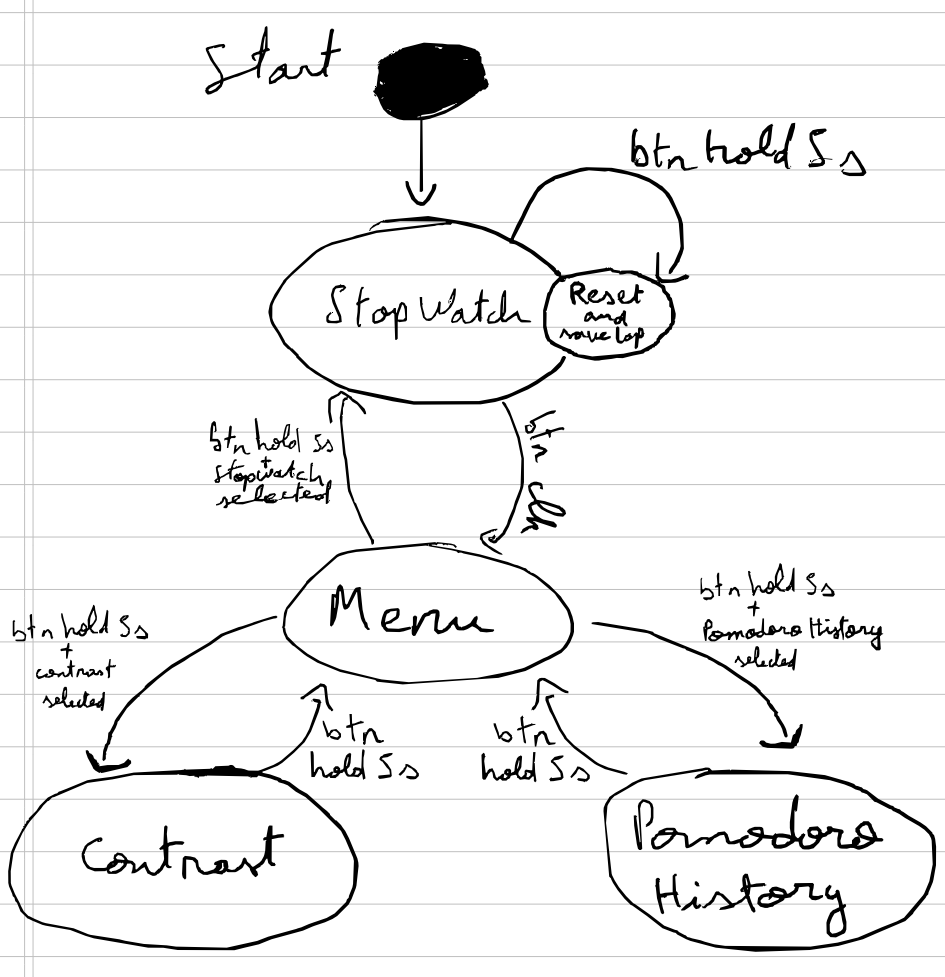

* Stopwatch:

Variables:

- s_tot, s, m, h : int (maybe use something more efficient)
- reset_time : int

Functions:

- display_clock(s, m, h) → Nothing
- handle_clock_event() → string
- reset_clock(s, m, h) → string

* Menu:

Variables:

- modes : tab [string]
- selected_mode : int

Functions:

- display_menu (selected_mode) → Nothing
- handle_menu_event() → string

* Contrast:

Variables:

- contrast : int

Functions:

- display_contrast (contrast) → Nothing
- handle_contrast_event() → string

* Pomodoro history:

Variables:

- lap_history : tab [string]

Functions:

- update_lap_history (lap_history) → tab[string]
- display_lap_history (lap_history) → Nothing
- hande_history_event() → string

* Hardware:

Variables:

- lcd : LiquidCristal
- contrast_pin : int
- contrast_button : int
- pressed_time : unsigned long
- click_buffer : tab [int]

Functions:

- click_handler (click_buffer) → string
  (returns wether the click was long or short)

* Ideas for V2:

- Add more buttons to improve UX.
- Use more efficient data types.
- Improve the click handling to add functionalities to 2x click.