
The name, on a post

One panel: the name, and the two facts a passer-by needs — open all night, and the numbers to ring. No service list, no photograph. Trim 1168 × 559 mm, the client's 3 ft 10 in × 1 ft 10 in, double-sided, for a lighting board. EDDWALIRO heads the panel, BCM stands under it, and the English name keeps the widest line.

HIGH 1 FT 10 IN / 558.8 MM

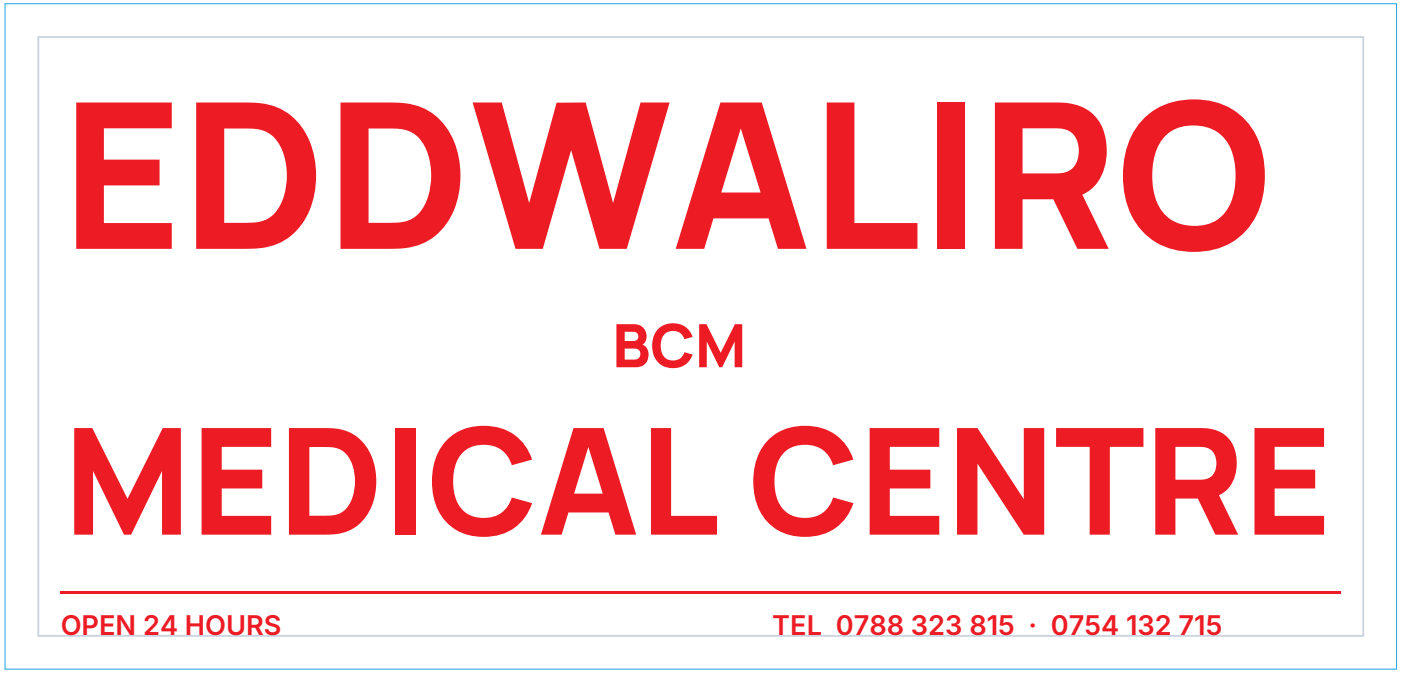


LONG 3 FT 10 IN / 1168.4 MM

MEASUREMENTS


- Trim: 1168.4 × 558.8 mm — 3 ft 10 in × 1 ft 10 in, i.e. 46 × 22 in (25.4 mm to the inch).
- Bleed: 10 mm all round, so the printed sheet is 1188 × 579 mm. Safe area 25 mm in from trim.
- Artwork is supplied at 1 : 1 in millimetres — plot it, do not scale it.
- Both faces are in the one PDF: print the file twice for a two-sided panel, or once per face for two single-sided panels back to back.

The words shout, the light doesn't


The box lights the sign, so the face does not have to. The field is plain white — the one colour that lights evenly edge to edge — and every word is set in bright red, as wide as the panel takes. The lettering is the shouting, not the panel: a white field with huge red words reads from across the road, lit or not, and it cannot go patchy the way a dense field does behind tubes.

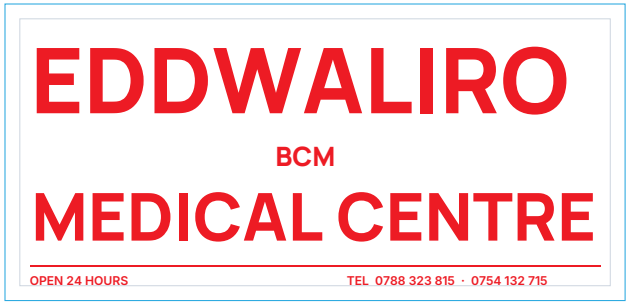

RED ON WHITE · IN THE PRINT FILES

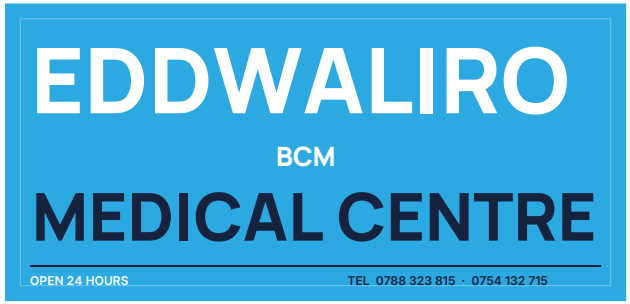

CYAN FIELD · SPARE

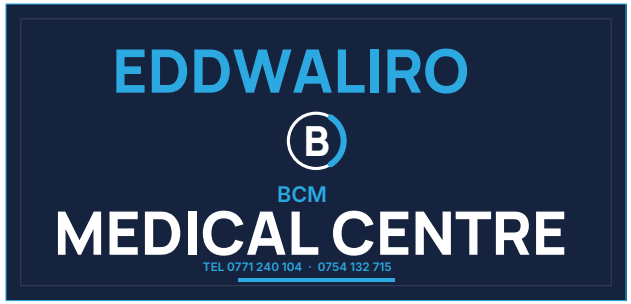

THE OLD NAVY FACE · NOT FOR THE BOX

WHAT CHANGED

- The type is much larger: all three lines are set to the full measure and the leftover height is shared out as spacing, so the words fill the panel without crowding each other. MEDICAL CENTRE is 89 mm cap height over a 559 mm panel.
- Everything is in red #ED1B24 — EDDWALIRO, BCM, MEDICAL CENTRE and the rules. One colour, so nothing competes with the name.
- The field is white, not cyan. The board's light makes the panel bright; the red makes the words loud. Two things shouting at once is one too many.
- The motto is off this face, as asked. The name and the foot line are the whole message, and the three lines take the height the motto used to occupy.
- The foot strip carries OPEN 24 HOURS at the left and the clinic's numbers at the right — 0788 323 815 · 0754 132 715 — under a red rule, in its own band so it never crowds the name.
- No monogram — BCM stands where it stood, in the display face.

IF THE RED IS TOO LOUD

- Say so and I will pull the red back to the clinic's cyan #2BA9E0 at the same size — the layout does not care which colour it is set in.

How it sits at the entrance

1.17 m of panel, 0.65 m² of face: panel centre 1500 mm above finished ground level and 2 posts under it are a proposal — the post centres and the frame must come from the signwriter who builds it.



DAY — MATTE FACE, STREET LIGHT



NIGHT — IF THE PANEL IS LIT

DRAWN TO SCALE · PANEL CENTRE 1500 MM ABOVE FINISHED GROUND LEVEL · TWO POSTS SHOWN AS A PROPOSAL

- The face is 0.65 m² of panel, 1168 mm long. The name is set to read from the road, so it stays legible well past the gate.
- Two posts carry it at 520 mm centres, or the whole panel sits in the lighting board's own carcass — the box carries it.
- A lit face is read from further off at night than an unlit one by day, so the name is set as large as the panel takes.

Production specification

SUBSTRATE — CONFIRM WITH THE SIGNWRITER

- The face is going into a lighting board, so it must be printed on a diffusing, backlit-grade material — translucent white acrylic or a backlit film for the box's own face, or backlit banner media if the box takes a soft face. Not vinyl on opaque composite: that blocks the light.
- The face is 0.65 m². The artwork is supplied at 1 : 1 in millimetres, so it can go straight onto the box's print or be plotted as a spare.
- Double-sided: the artwork is identical on both faces, so the same file prints twice.
- Print the white field as a solid, even coat — no gradient, no vignette. Banding in a large flat field shows up far more when it is lit from behind.
- Red is the colour to watch: #ED1B24 bleeds slightly into white when it is lit from behind, so the letter edges soften and the red can warm towards orange. Hold it as a flat spot colour if the process allows, and check a lit sample before the run.

FIXING — CONFIRM WITH THE INSTALLER

- Illumination: internally lit box, face lit from behind. Panel centre 1500 mm above finished ground level is a proposal — confirm it against the box and the kerb line, and check that the box takes this face size before it is ordered.
- The face fits the box's aperture, not its outer frame: trim is 1168 × 559 mm, so the visible opening should be that size or the artwork will be cropped by the rebate.
- One rule for a lit face: the light must be even across the whole panel. That is why the field is white and the ink is confined to the lettering and the rule.
- If it is also to stand on posts rather than in the box, two galvanised posts at 520 mm centres, 600 mm into concrete, is the industry-typical proposal. Not a quotation.

BEFORE PLOT

- Measurement is the client's: 3 ft 10 in × 1 ft 10 in. Check it against the panel the signwriter is actually making before the file is plotted.
- The sheet is supplied at 1 : 1 in millimetres — plot it, do not scale it on the plotter, and leave the crop marks outside the bleed.
- Confirm the fascia wording and the spelling of EDDWALIRO with the client before plot. The old navy face kept a recreated monogram; the lit faces carry BCM instead.
- Check the red against a printed sample lit from behind before the full run.

THE FILE

- Trim 1168.4 × 558.8 mm, bleed 10 mm all round, so the page is 1188.4 × 600.8 mm — 1 : 1, no scaling.
- A 22 mm slug runs along the foot with the file name, the trim and the colour note — trim it off.
- Safe area 25 mm inside trim. Crop marks at the four corners, outside the bleed.
- Colour: red #ED1B24 on white, nothing else. Supply as CMYK or let the printer convert — do not let the red drift towards orange.