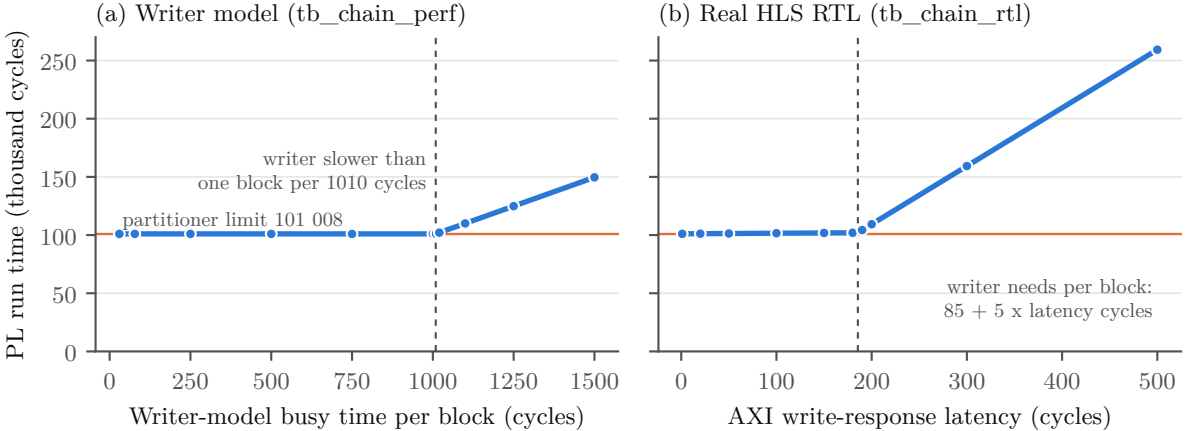
(a) Writer model (tb_chain_perf)
(b) Real HLS RTL (tb_chain_rtl)
PL run time (thousand cycles)
250
200
150
100
50
0
writer slower than
one block per 1010 cycles
partitioner limit 101 008
writer needs per block:
85 + 5 x latency cycles
0
250
500
750
1000
1250
1500
0
100
200
300
400
500
Writer-model busy time per block (cycles)
AXI write-response latency (cycles)