


fast-layout manual (v0.1.0)

fast-layout computes coordinates and leaves drawing to Typst or a drawing package. Node indices start at zero, and position `i` belongs to node `i`.

Basic use

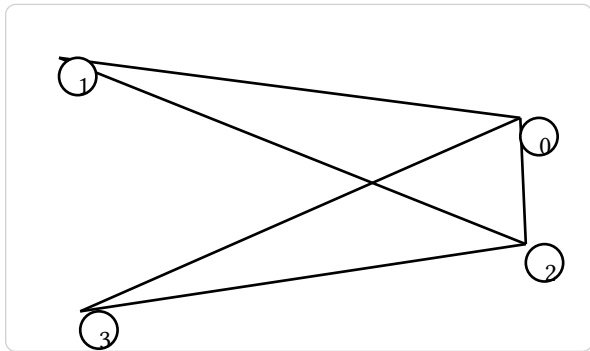

The result also reports iterations, converged, and an optional objective. Available algorithms are `stress`, `spring`, `spectral`, `shell`, and `buchheim`. `circular` is an alias for `shell`.

Stress and spring support initial positions and per-coordinate pins. Spectral uses edge affinities and optional node weights. Shell accepts groups through `shells`. Buchheim treats edges as parent-to-child links and accepts node sizes plus a root index.